SONY

PROFESSIONAL VIDEO MONITOR

PVM-1741
PVM-1741A

TRIMASTER EL

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

SERVICE MANUAL

1st Edition (Revised 3)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

本機をラックに設置するとき
熱の適切な排気・発散を得るために，ラックと本機の間には，以下の空間を確保してください。
・上下 1U（4.4 cm）
・左右両側面 1 cm 以上

Attention-when the product is installed in Rack:

1. **Prevention against overloading of branch circuit**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please make sure that the rack does not overload the supply circuit.

2. **Providing protective earth**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please confirm that the outlet is provided with a suitable protective earth connection.

3. **Internal air ambient temperature of the rack**
   When this product is installed in a rack, please make sure that the internal air ambient temperature of the rack is within the specified limit of this product.

4. **Prevention against achieving hazardous condition due to uneven mechanical loading**
   When this product is installed in a rack, please make sure that the rack does not achieve hazardous condition due to uneven mechanical loading.

5. **Install the equipment while taking the operating temperature of the equipment into consideration**
   For the operating temperature of the equipment, refer to the specifications of the Operating Instructions.

6. **When performing the installation, keep the following space away from walls in order to obtain proper exhaust and radiation of heat.**
   Lower, Upper: 4.4 cm (1 3/4 inches) or more
   Right, Left: 1.0 cm (13/32 inches) or more

警告

設置の際には，容易にアクセスできる固定配線内に専用遮断装置を設けるか，機器使用中に，容易に抜き差しできる機器に近いコンセントに電源プラグを接続してください。
万一，異常が起きた際には，専用遮断装置を切るか，電源プラグを抜いてください。

WARNING
When installing the unit, incorporate a readily accessible disconnect device in the fixed wiring, or connect the power plug to an accessible socket-outlet near the unit. If a fault should occur during operation of the unit, operate the disconnect device to switch the power supply off, or disconnect the power plug.

WARNUNG
Beim Einbau des Geräts ist daher im Festkabel ein leicht zugänglicher Unterbrecher einzufügen, oder der Netzstecker muss mit einer in der Nähe des Geräts befindlichen, leicht zugänglichen Wandsteckdose verbunden werden. Wenn während des Betriebs eine Funktionsstörung auftritt, ist der Unterbrecher zu betätigen bzw. der Netzstecker abzuziehen, damit die Stromversorgung zum Gerät unterbrochen wird.

安全のために，周辺機器を接続する際は，過大電圧を持つ可能性があるコネクターを以下のポートに接続しないでください。
: SERIAL REMOTE コネクター
: PARALLEL REMOTE コネクター
上記のポートについては本書の指示に従ってください。

For safety, do not connect the connector for peripheral device wiring that might have excessive voltage to the following ports.
: SERIAL REMOTE connector
: PARALLEL REMOTE connector
Follow the instructions for the above ports.

Table of Contents

Manual Structure

Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)
Description by serial number ..... 3 (E)

1. Service Overview

1-1. Appearance Figure ..... 1-1 (E)
1-2. Board Location ..... 1-1 (E)
1-3. Disassembly ..... 1-2 (E)
1-3-1. Rear Cover Assembly ..... 1-2 (E)
1-3-2. QB Board ..... 1-3 (E)
1-3-3. G2 Board ..... 1-5 (E)
1-3-4. DC Fan ..... 1-6 (E)
1-3-5. G1 Board ..... 1-7 (E)
1-3-6. Speaker ..... 1-8 (E)
1-3-7. H2 Board ..... 1-9 (E)
1-3-8. H1 Board ..... 1-10 (E)
1-3-9. Bezel Assembly ..... 1-11 (E)
1-3-10. X Board ..... 1-13 (E)
1-3-11. OLED Module Assembly ..... 1-14 (E)
1-3-12. BC Board and PT1 Board ..... 1-15 (E)
1-4. Periodic Replacement Parts and Cleaning ..... 1-16 (E)
1-4-1. Periodic Replacement Parts ..... 1-16 (E)
1-4-2. Cleaning ..... 1-16 (E)
1-5. Lead-free Solder ..... 1-16 (E)

2. Electrical Alignments

2-1. Preparation ..... 2-1 (E)
2-2. White Balance Adjustment ..... 2-1 (E)
2-3. A/D Adjustment (COMPOSITE) ..... 2-2 (E)

3. Circuit Description

3-1. BC Board ..... 3-1 (E)
3-1-1. Outline ..... 3-1 (E)
3-1-2. Circuit Configuration and Operation ..... 3-1 (E)
3-1-3. Overvoltage and Overcurrent Protection ..... 3-2 (E)
3-2. G1 Board ..... 3-2 (E)
3-3. G2 Board ..... 3-2 (E)
3-4. QB Board ..... 3-2 (E)
3-5. H1 Board ..... 3-2 (E)
3-6. H2 Board ..... 3-2 (E)
3-7. X Board ..... 3-2 (E)
3-8. S Board ..... 3-2 (E)

4. Troubleshooting

4-1. System Does Not Start ..... 4-1 (E)
4-2. Control Operation of This Unit Is Abnormal ..... 4-1 (E)
4-3. Image Is Abnormal ..... 4-2 (E)
4-4. TALLY Lamp Is Not Lit ..... 4-2 (E)
4-5. Fan Is Abnormal ..... 4-3 (E)

5. Spare Parts

5-1. Notes on Repair Parts 5-1
5-2. Exploded Views 5-2
5-3. Electrical Parts List 5-10
5-4. Packing Materials & Supplied Accessories 5-31

6. Block Diagrams

Overall 6-1

7. Schematic Diagrams

PT1 7-1
BC 7-2
Frame Wiring 7-35

8. Board Layouts

PT1 8-1
BC 8-2

Manual Structure

Purpose of this manual

This manual is the Service Manual of the Professional Video Monitor PVM-1741/ PVM-1741A.
This manual contains the service overview, electrical alignments, circuit description, troubleshooting, spare parts, block diagrams, and schematic diagrams and board layouts.

The service of this unit is basically performed by the replacement of board except the BC board and PT1 board.
Therefore, the schematic diagram, board layout and electrical parts list are not contained except the BC board and PT1 board.

Related manuals

In addition to this Service Manual the following manual is provided.

- **"Operating Instructions" (supplied with this unit)**
  This manual is necessary for application and operation of this unit.


Description by serial number

Some parts of this manual are described by serial number.
• 1-3-2. QB Board
• 1-3-9. Bezel Assembly


In this case, note that the illustration and description vary depending on the serial number of the model.
Other than the case above, the contents are common in each model. Here, PVM-1741 is used as an example of description.

Section 1
Service Overview

1-1. Appearance Figure

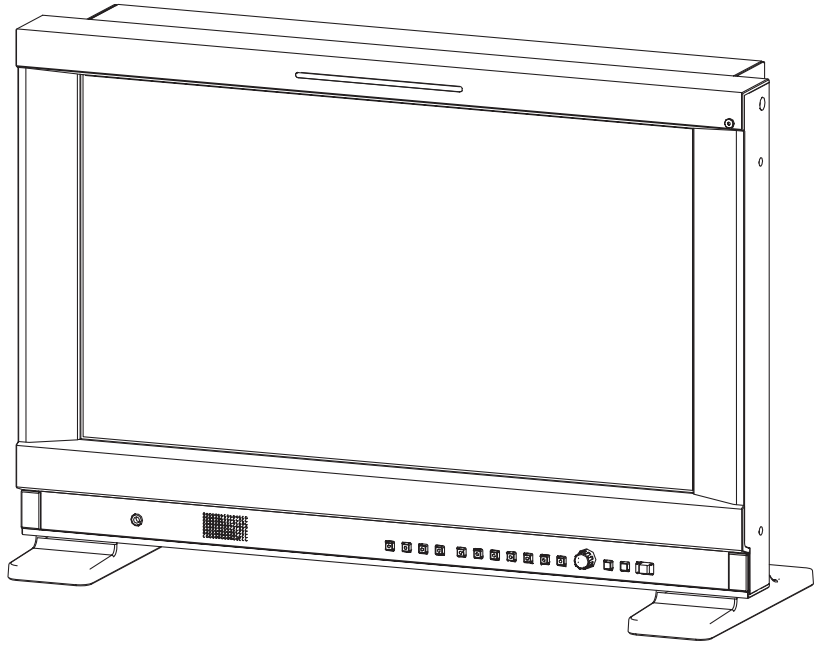

1-2. Board Location

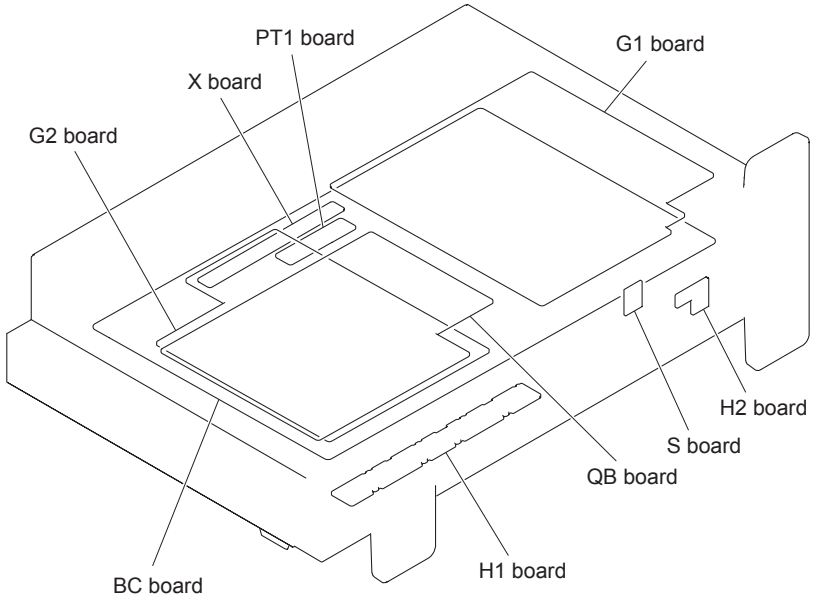


1-3. Disassembly

Notes

- In this section, remove parts in the order of numbers shown in the figure.
- When removing/installing the cabinet and replacing the board, place the unit on the conductive cushion.
- BC board is not prepared for spare parts. When the BC board is broken, replace the OLED module assembly.


1-3-1. Rear Cover Assembly

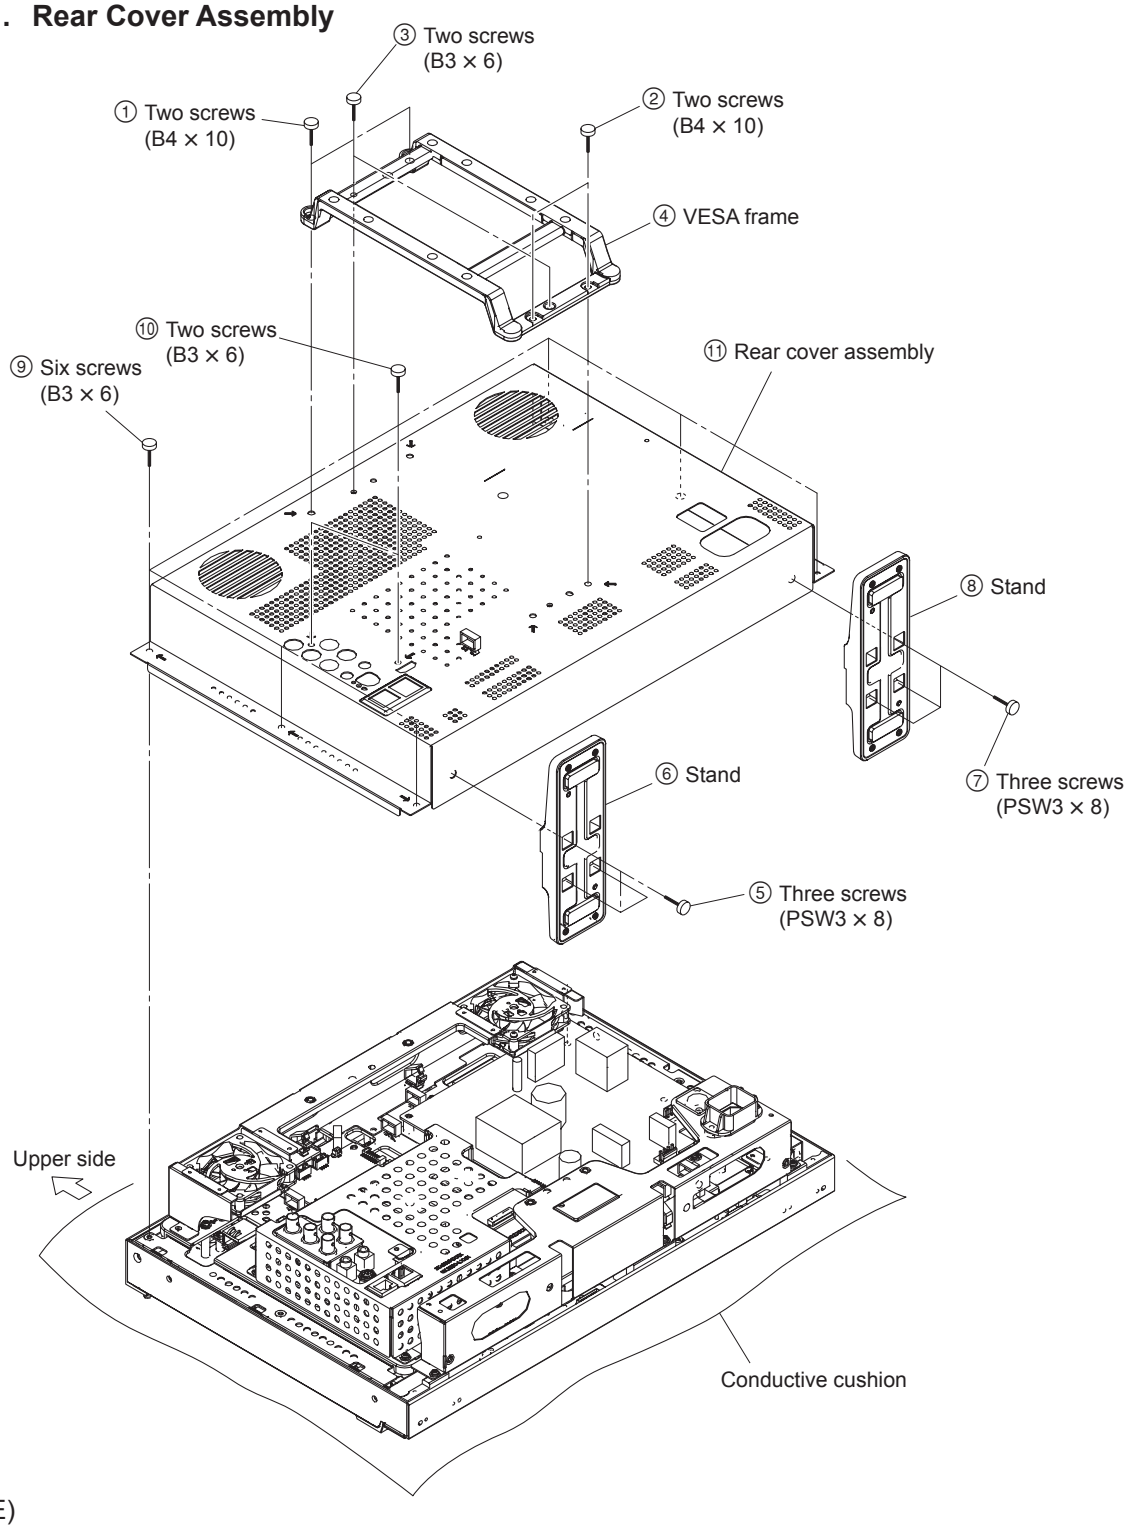

1-3-2. QB Board


PVM-1741: S/N 3000001 and higher (SY)
S/N 7000001 to 7099999 (SY)
S/N 5000001 and higher (CN)
PVM-1741A: S/N 3000001 to 3100000 (SY)
S/N 5000001 to 5100000 (CN)

• Remove the rear cover assembly. (Refer to Section 1-3-1.)

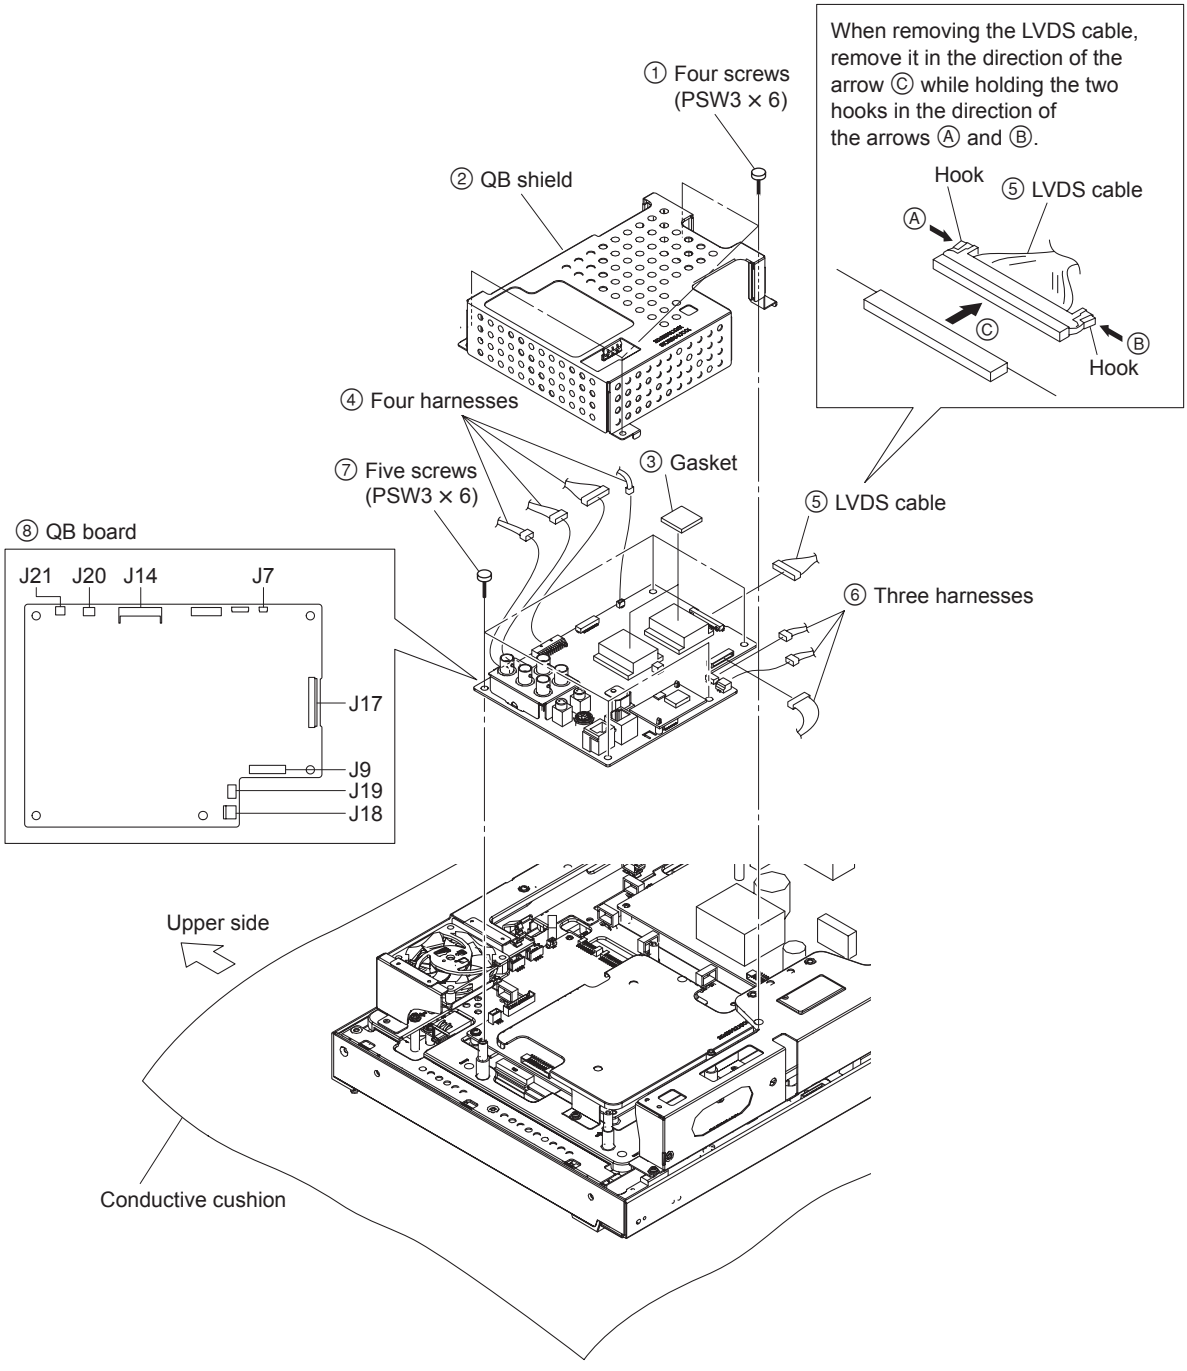


PVM-1741A: S/N 3100001 and higher (SY)
S/N 5100001 and higher (CN)

• Remove the rear cover assembly. (Refer to Section 1-3-1.)

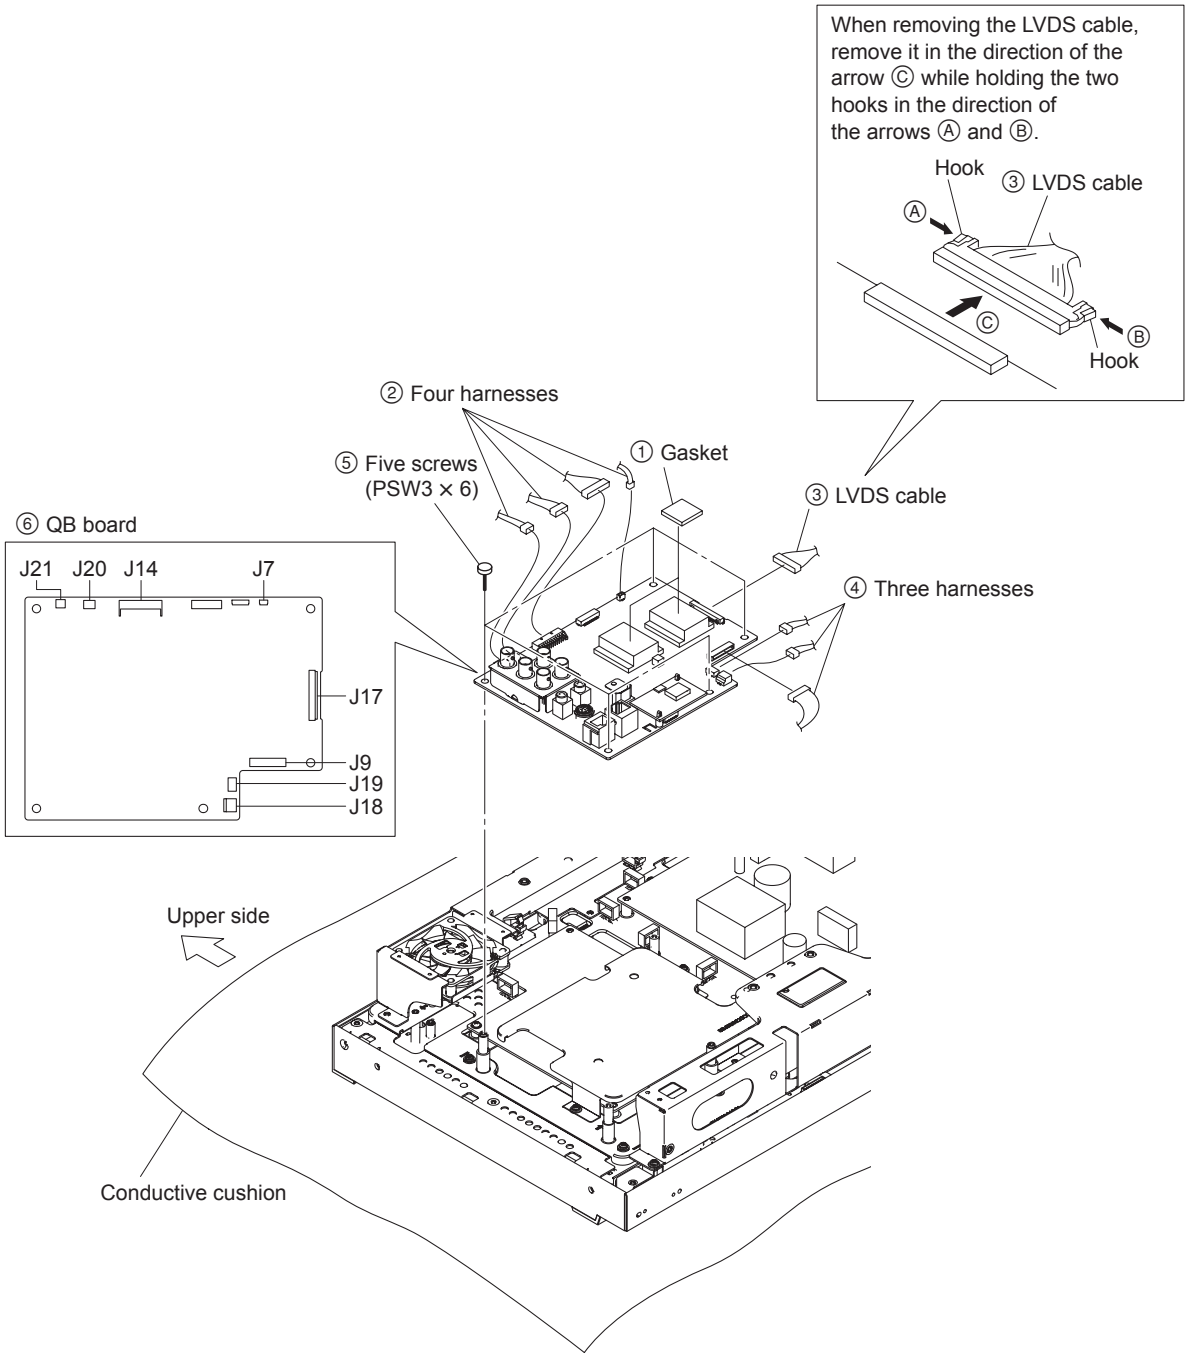


1-3-3. G2 Board

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the QB board. (Refer to Section 1-3-2.)

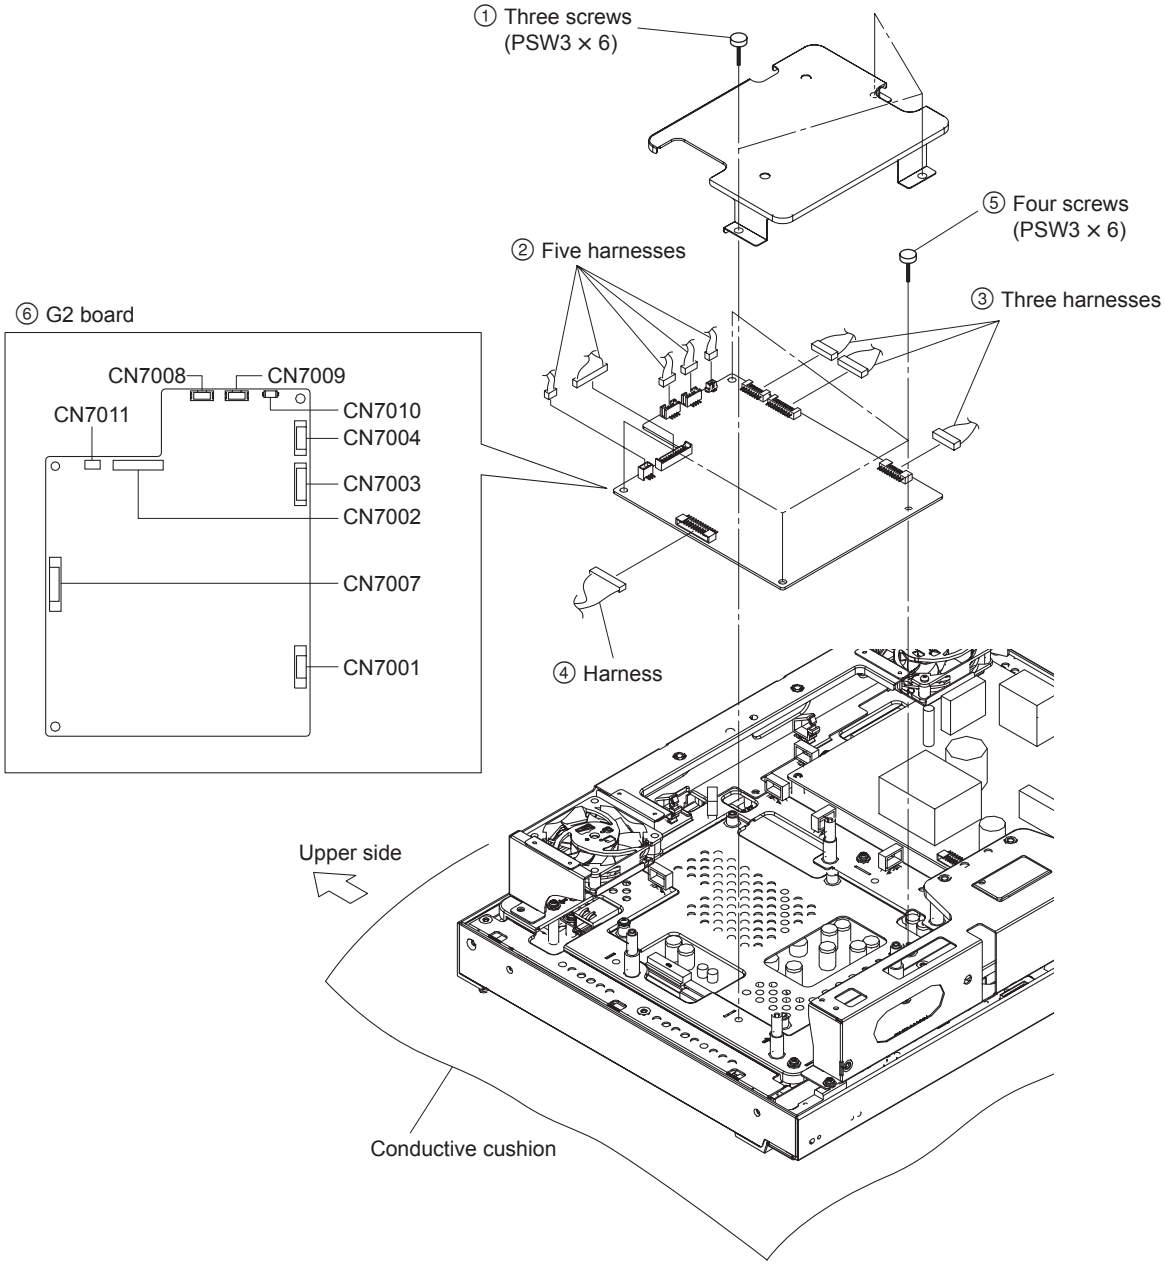


1-3-4. DC Fan

• Remove the rear cover assembly. (Refer to Section 1-3-1.)

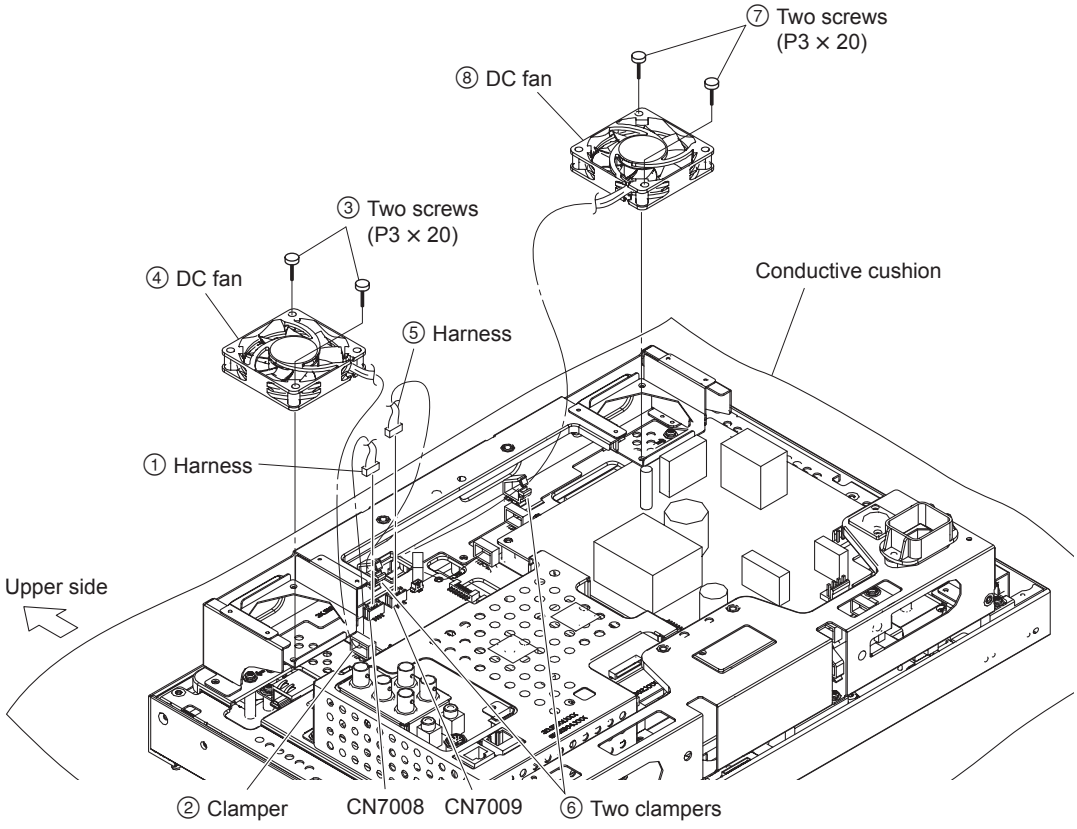


1-3-5. G1 Board

• Remove the rear cover assembly. (Refer to Section 1-3-1.)

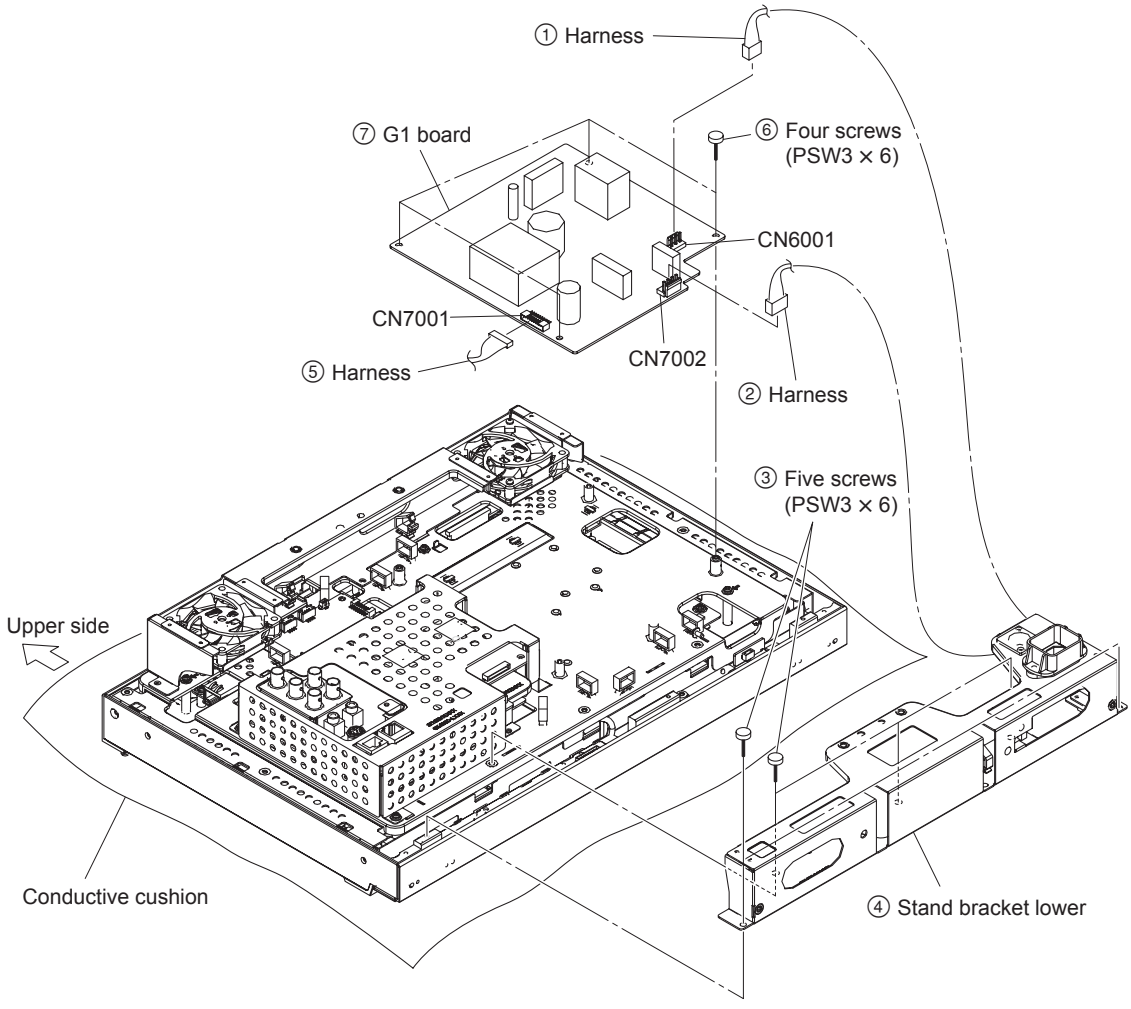


1-3-6. Speaker

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the stand bracket lower. (Refer to steps ③ and ④ in Section 1-3-5.)

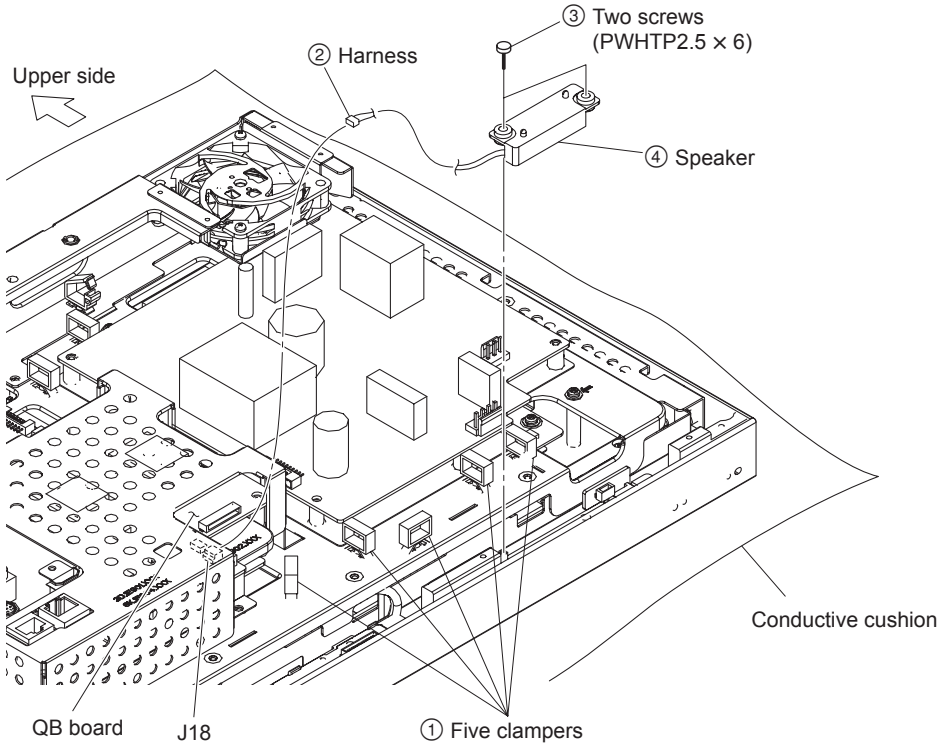


1-3-7. H2 Board

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the stand bracket lower. (Refer to steps ③ and ④ in Section 1-3-5.)

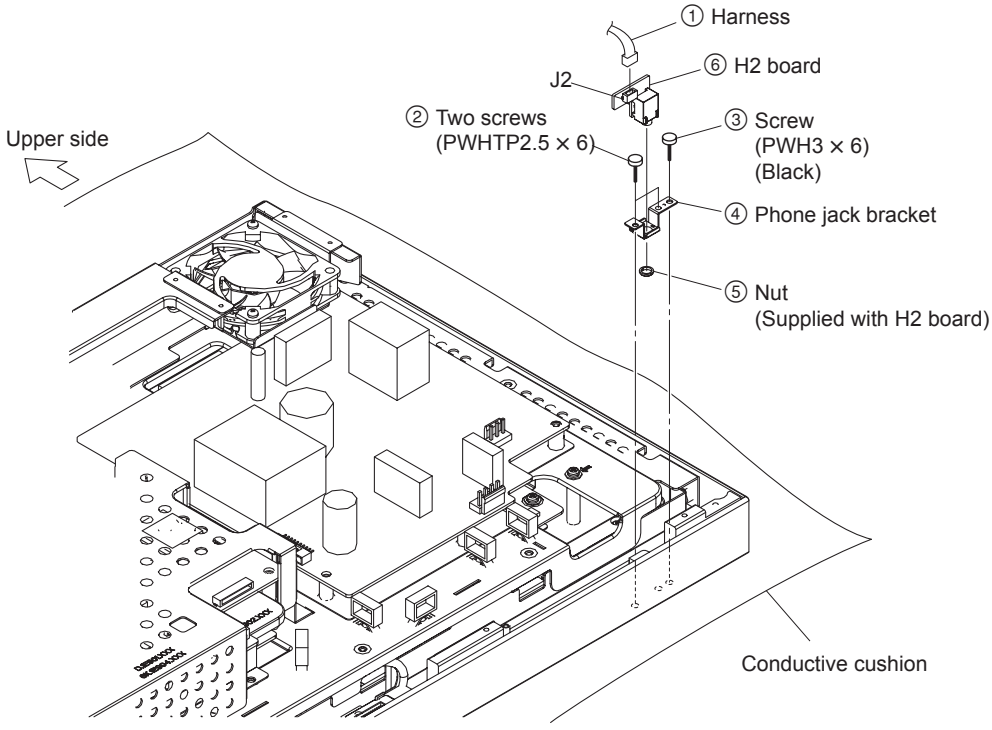

1-3-8. H1 Board


- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the stand bracket lower. (Refer to steps ③ and ④ in Section 1-3-5.)

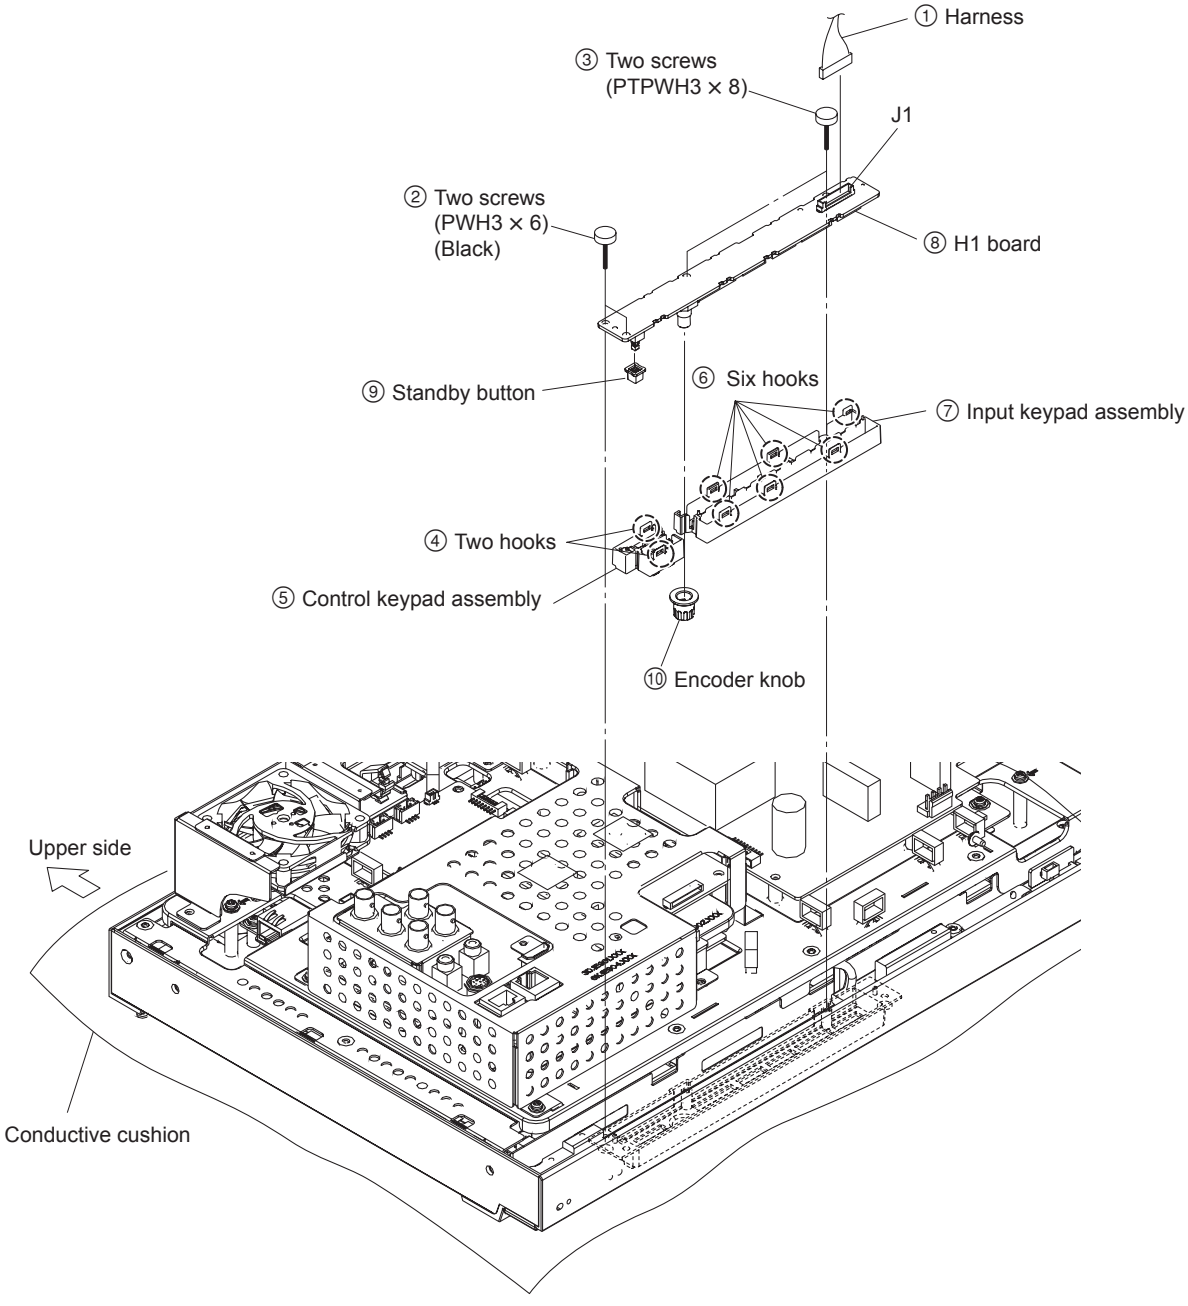

1-3-9. Bezel Assembly


PVM-1741: S/N 3000001 and higher (SY)
S/N 7000001 to 7099999 (SY)
S/N 5000001 and higher (CN)
PVM-1741A: S/N 3000001 to 3100000 (SY)
S/N 5000001 to 5100000 (CN)

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the stand bracket lower. (Refer to steps ③ and ④ in Section 1-3-5.)

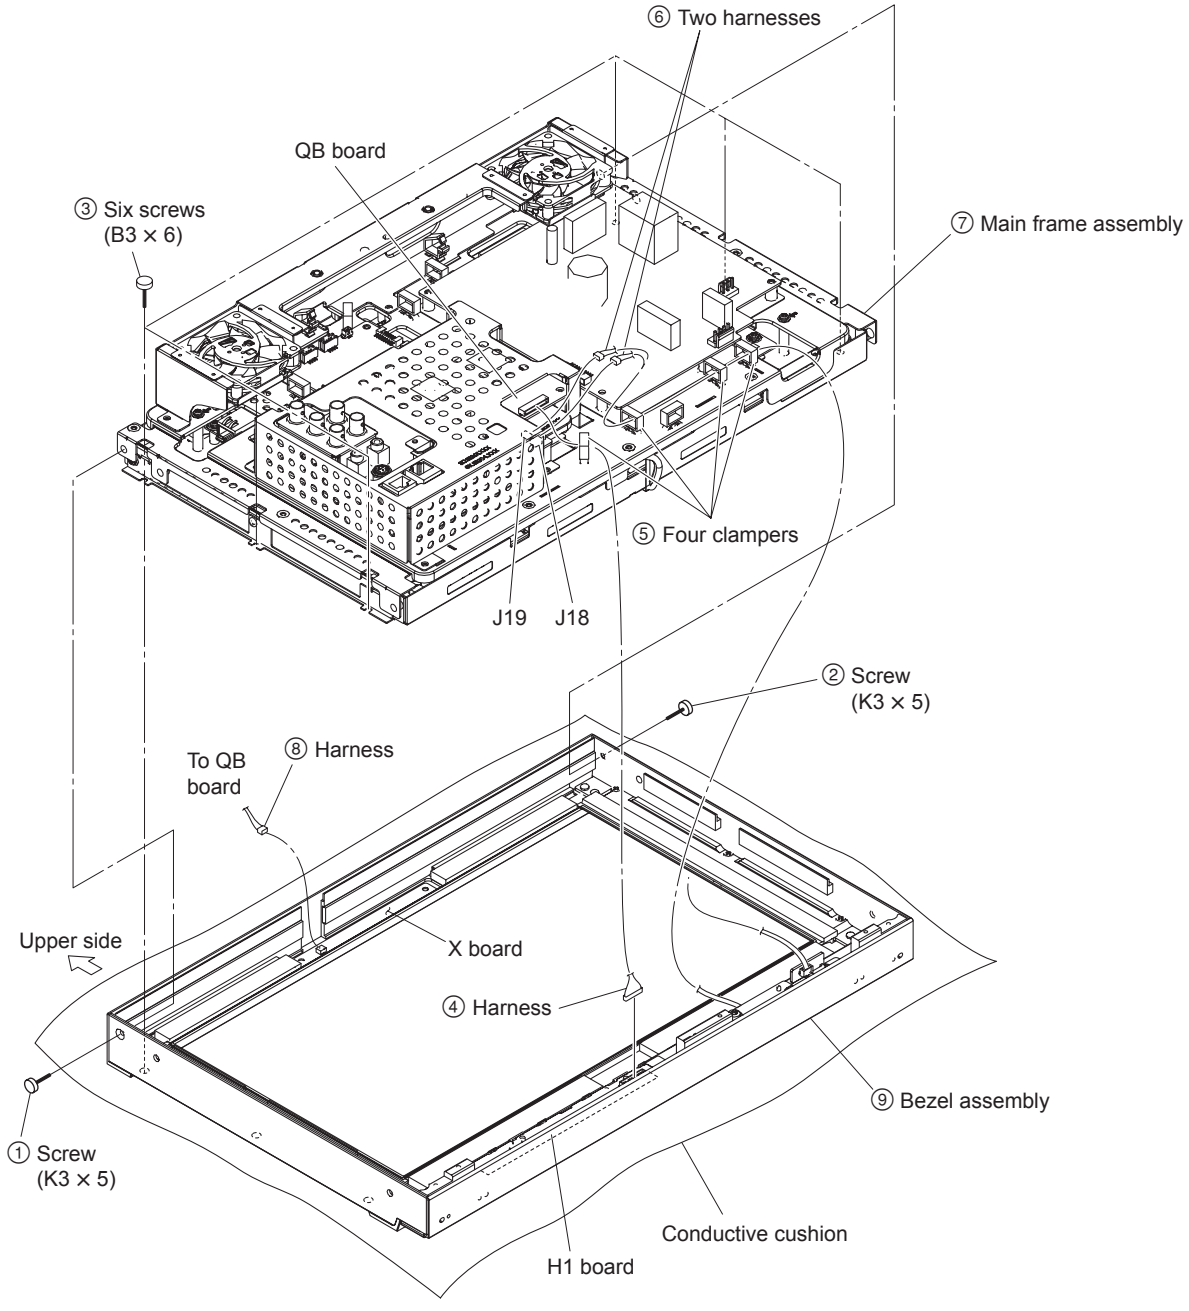


PVM-1741A: S/N 3100001 and higher (SY)
S/N 5100001 and higher (CN)

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the stand bracket lower. (Refer to steps ③ and ④ in Section 1-3-5.)

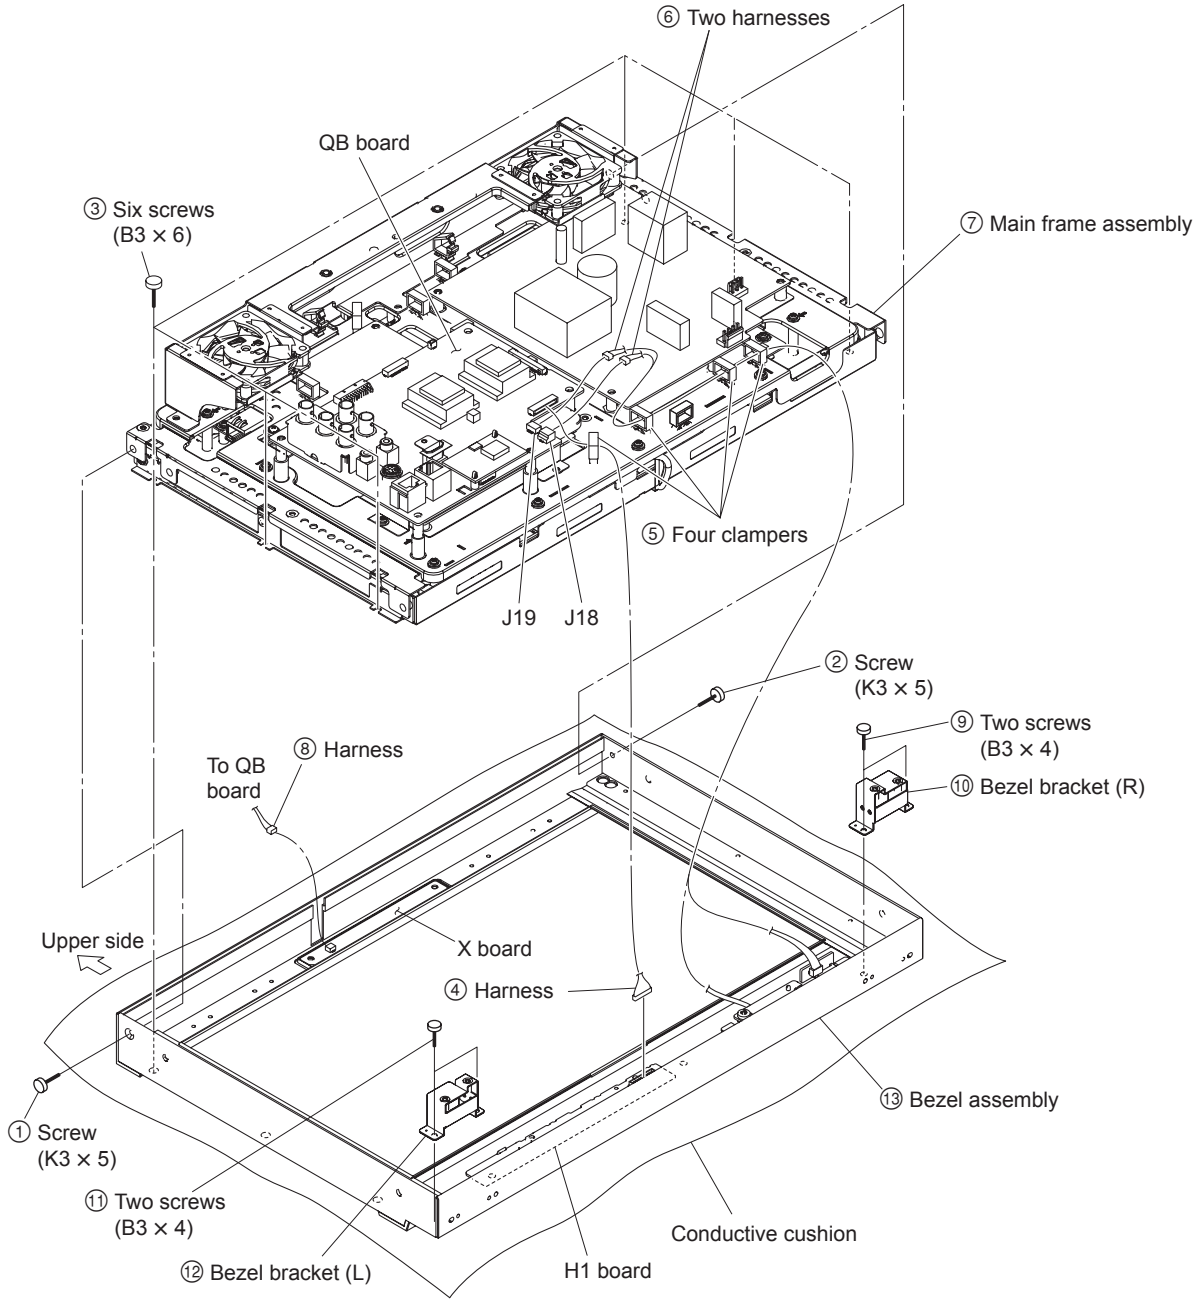


1-3-10. X Board

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the bezel assembly. (Refer to Section 1-3-9.)

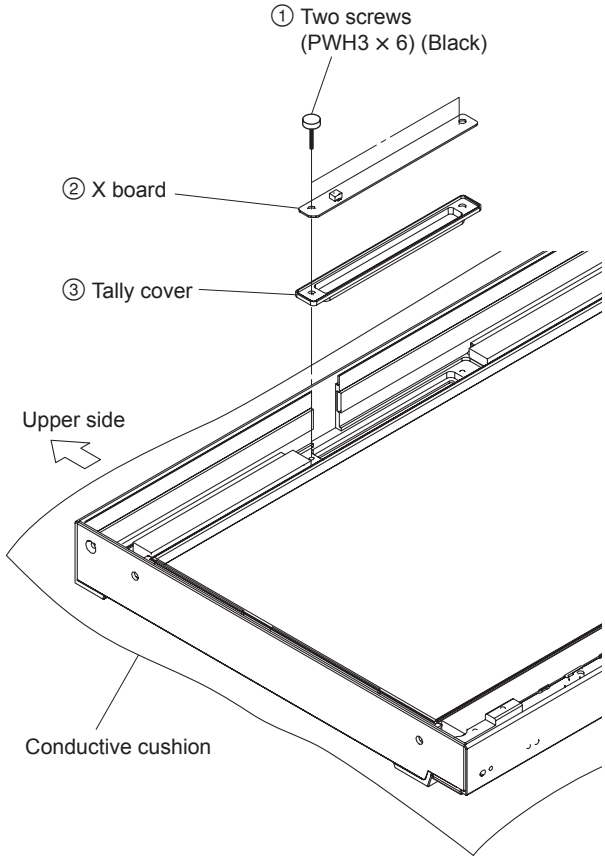


1-3-11. OLED Module Assembly

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the QB board. (Refer to Section 1-3-2.)
- Remove the G2 board. (Refer to Section 1-3-3.)
- Remove the G1 board. (Refer to Section 1-3-5.)
- Remove the bezel assembly. (Refer to Section 1-3-9.)

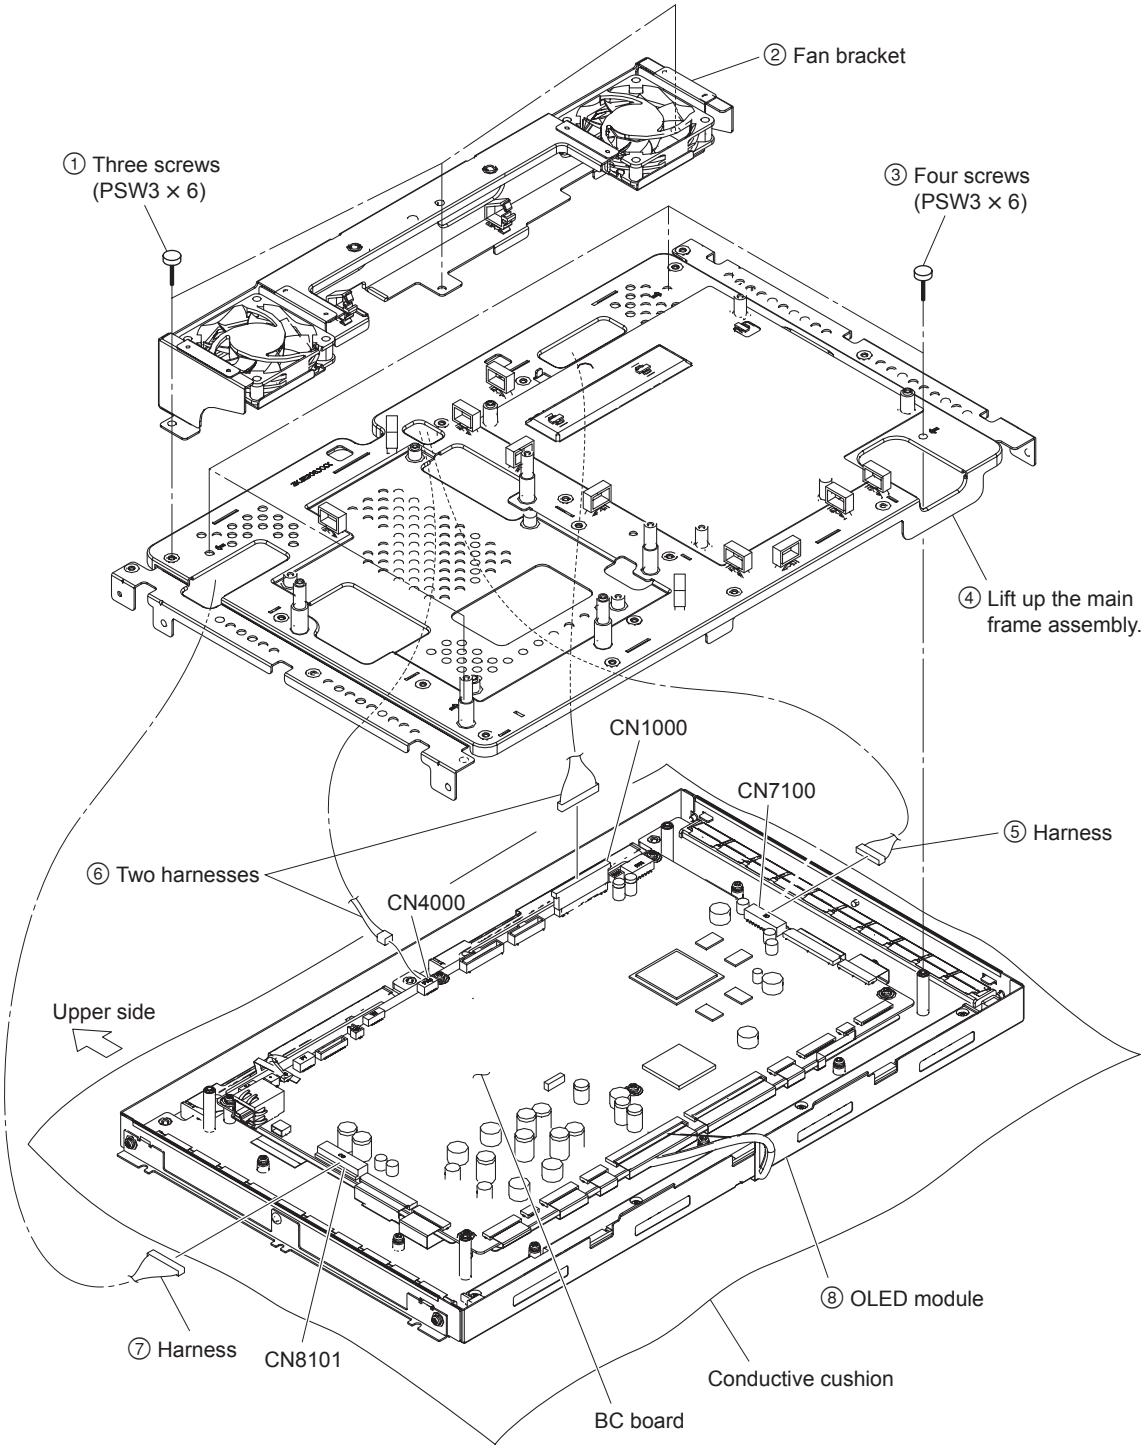

1-3-12. BC Board and PT1 Board

- Remove the rear cover assembly. (Refer to Section 1-3-1.)
- Remove the QB board. (Refer to Section 1-3-2.)
- Remove the G2 board. (Refer to Section 1-3-3.)
- Remove the G1 board. (Refer to Section 1-3-5.)
- Remove the bezel assembly. (Refer to Section 1-3-9.)
- Remove the main frame assembly. (Refer to steps ① to ⑧ in Section 1-3-11.)

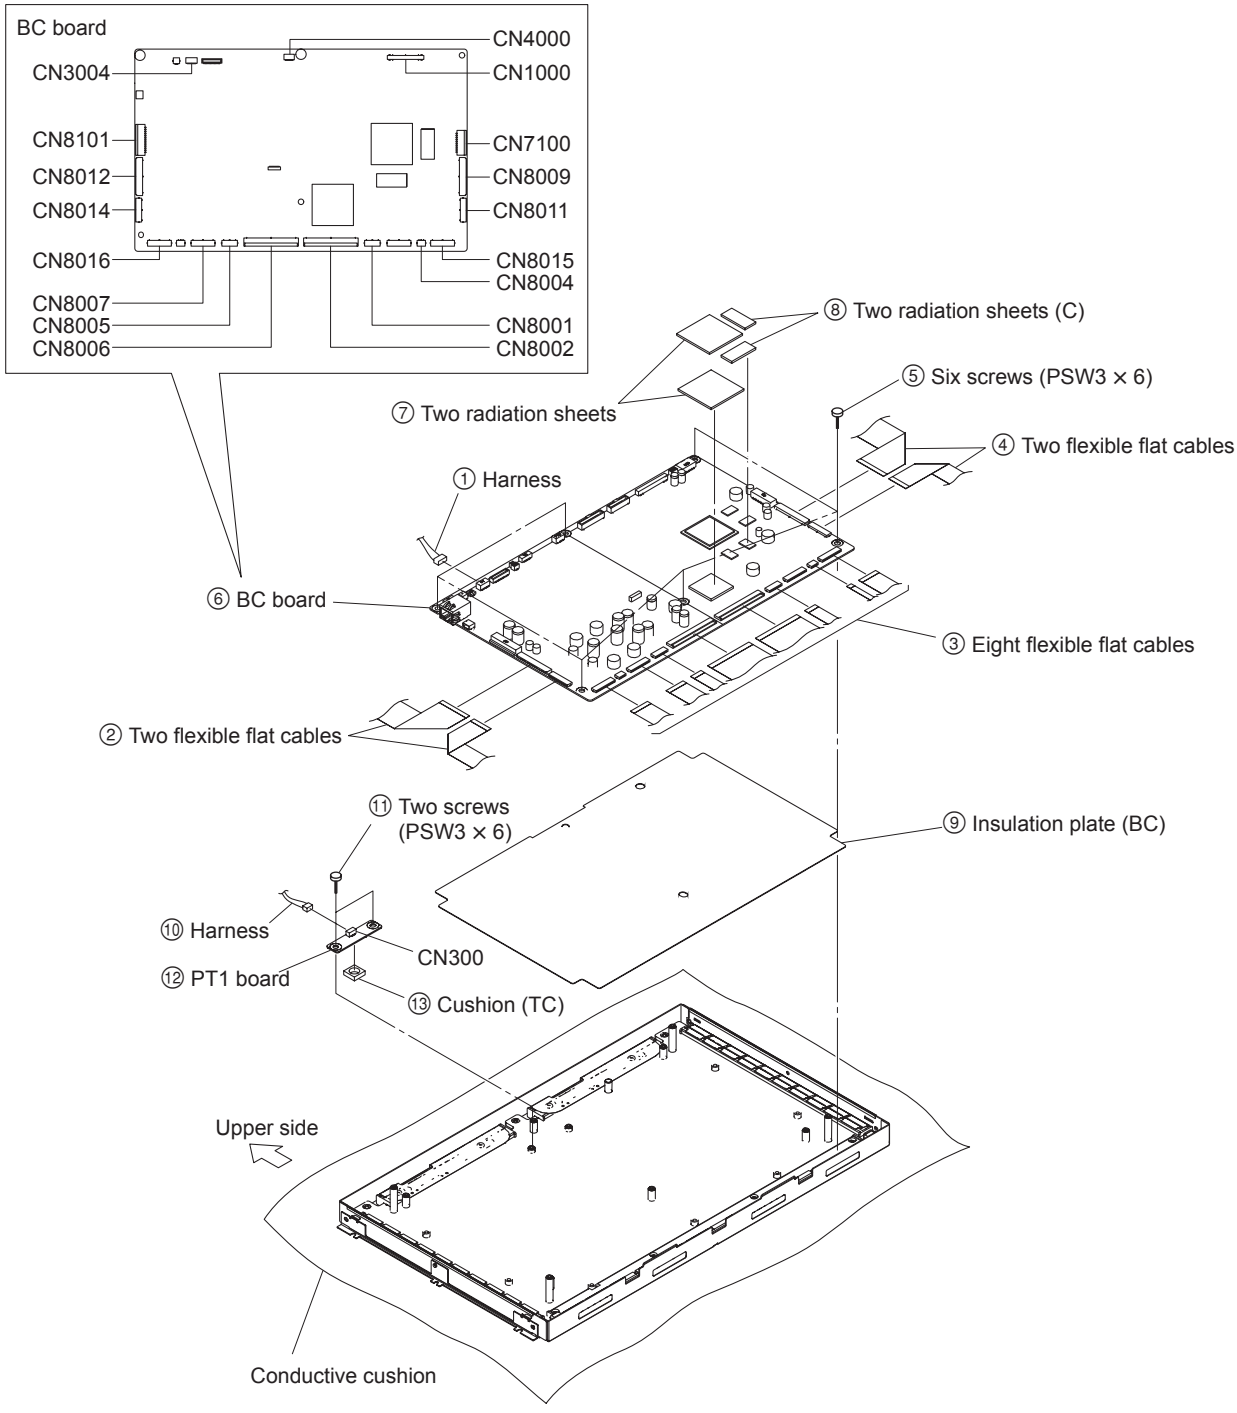

1-4. Periodic Replacement Parts and Cleaning

1-4-1. Periodic Replacement Parts

Note

This table does not describe the guarantee period of each part.
The replacement period of each part is changed according to the environment and conditions of use.
(The following is the value when the environmental temperature of this unit is set to 25 °C <77 °F>.)

Part name	Part No.	Number of pieces	Replacement period (h) (Operating time: 24 hours/day)	(Operating time: 16 hours/day)
OLED module assembly (PVM-1741)	A-1866-053-A	1	15000	25000
OLED module assembly (PVM-1741A)	A-1938-239-A	1	15000	25000
G1 board	1-895-075-11	1	25000	50000
G2 board	1-895-076-11, -12	1	25000	50000
DC fan	1-855-130-11	1	20000	40000
DC fan	1-855-130-21	1	20000	40000

1-4-2. Cleaning

Clean periodically the dust on the OLED module assembly and fans.
It is recommended to perform the cleaning once a year in the case of the operating time of 24 hours/day and every two years in the case of the operating time of 16 hours/day.

1-5. Lead-free Solder

All boards mounted in this unit use lead-free solder. Be sure to use lead-free solder when repairing the boards of this unit. A lead free mark (LF) indicating that the solder contains no lead is printed on each board.
(Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size.)

: LEAD FREE MARK

Notes

- The lead-free solder melts at a temperature about 40 °C higher than the ordinary solder, therefore, it is recommended to use the soldering iron having a temperature regulator.
- The ordinary soldering iron can be used but the iron tip has to be applied to the solder joint for a slightly longer time. The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful.

Section 2
Electrical Alignments

2-1. Preparation

Required tools and measuring equipment

- Luminance meter:
  Konica Minolta CA-210, CA-110 or equivalent.
  If equivalent is not available, make adjustment by comparing the LCD monitor with the reference monitor that has already been calibrated correctly.
- Signal generator: VG-854 or equivalent

Warm-up time

Before starting adjustment, allow a warm-up of minimum 30 minutes.

How to enter service mode

1. Press the MENU button to display the MENU screen.
2. Press the RETURN and F6 buttons simultaneously.

How to exit the service mode

1. Press the MENU button not to display the MENU screen.

Preparing the power supply and signals

1. Connect the power cord of this unit.
   Power voltage: 100 to 240 V AC, 50/60 Hz
2. Turn on the power of this unit.

2-2. White Balance Adjustment

If the OLED module assembly is replaced, perform the white balance adjustment.

1. Move the cursor to SIGNAL and press the rotary encoder knob to enter the SIGNAL layer.
2. Move the cursor to WHITE BALANCE and press the rotary encoder knob to enter the SIGNAL-WHITE BALANCE layer.

Here, to move the cursor to select an item and to set the selected item, rotate the rotary encoder knob and press it respectively.

D93 adjustment

1. Set D93 in COLOR TEMP.
2. Adjust the highlight side in R GAIN, G GAIN and B GAIN.
3. Adjust the lowlight side in R BIAS, G BIAS and B BIAS.
4. Repeat steps 2 and 3 until all of the required specifications are met all at the same time.

D65 adjustment

1. Set D65 in COLOR TEMP.
2. Adjust the highlight side in R GAIN, G GAIN and B GAIN.
3. Adjust the lowlight side in R BIAS, G BIAS and B BIAS.
4. Repeat steps 2 and 3 until all of the required specifications are met all at the same time.

2-3. A/D Adjustment (COMPOSITE)

1. Input the NTSC 100% 8 color-bar COMPOSITE signal to this unit.
2. Press COMPOSITE to accept the COMPOSITE input signal.
3. In the Service menu, enter the SIGNAL-SIGNAL LEVEL layer, then perform AUTO.
   - Y/G LEVEL
   - PB LEVEL
   - PR LEVEL
4. Perform the adjustments of items 1-2 and 1-3 in table 1 shown below by repeating the above described procedures.

COMPOSITE selection input

1-1	NTSC SETUP 0 100% 8 color-bar signal	
	Y/G LEVEL	
	PB/B LEVEL	Conditions:
	PR/R LEVEL	NTSC SETUP 0
1-2	PAL 100% 8 color-bar signal	
	Y/G LEVEL	
	PB/B LEVEL	Conditions:
	PR/R LEVEL	No specific conditions
1-3	NTSC SETUP 7.5 100% 8 color-bar signal	
	Y/G LEVEL	
	PB/B LEVEL	Conditions:
	PR/R LEVEL	NTSC SETUP 7.5


Table 1

Section 3
Circuit Description

3-1. BC Board

The panel power is produced on the BC board.

Schematic diagram of panel power

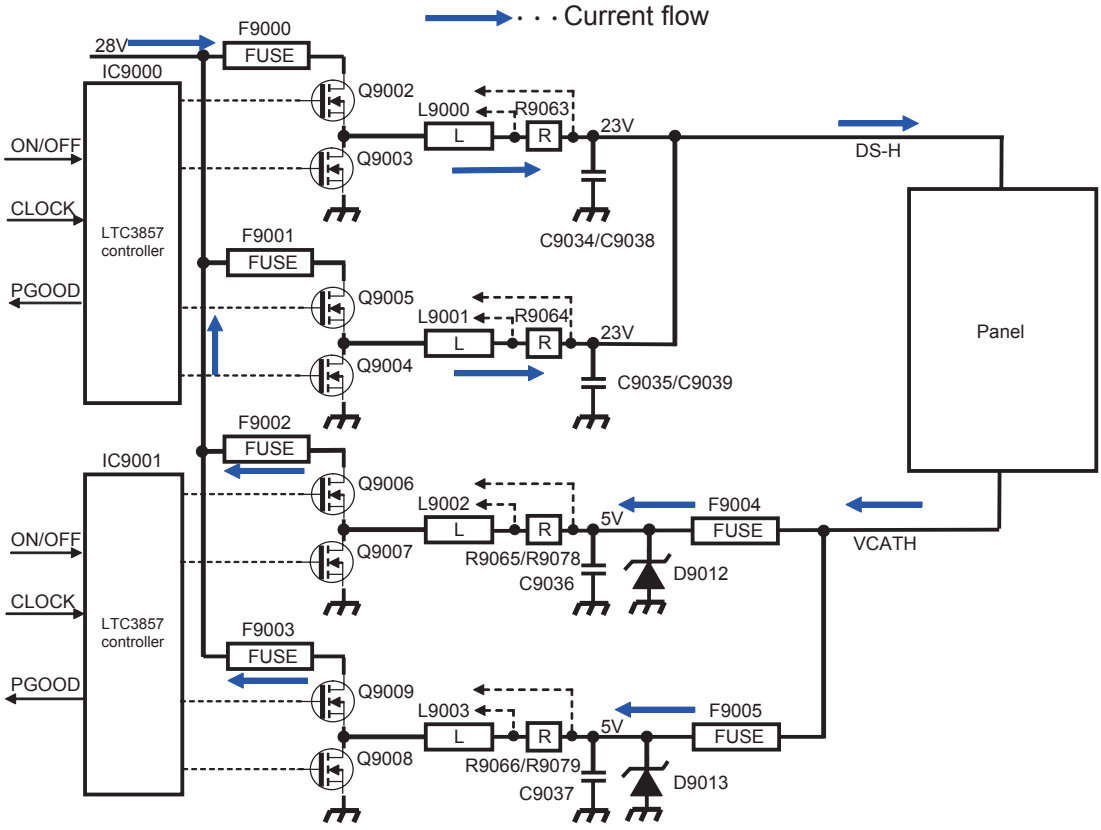

3-1-1. Outline

The panel power that is both power supplies of DS-H (23 V) and VCATH (5 V) indicates the main power of a panel. It is produced from +28 V, supplied from a G board, using a DC-DC converter. Both power supplies have DualPhase configuration so that they can be used for a heavy current.
The VCATH power also operates as a SINK current. It is designed to return power to a power line of +28 V by boosting.

3-1-2. Circuit Configuration and Operation

Main component parts are a panel DC-DC controller (IC9000 and IC9001), Nch_TopFET, Nch_BottomFET, an external current detection resistor, a coil, and a capacitor. A power voltage of +28 V is supplied, and a DC-DC converter begins to operate with the clock and ON signals from FPGA_TC (IC8300). DS-H is first turned on, and VCATH is turned on after 50 msec. In this sequence, FPGA_TC monitors the PGOOD terminal of the DC-DC controller. It turns off the power when an error occurs.

3-1-3. Overvoltage and Overcurrent Protection

A controller monitors an output voltage and current. It outputs PGOOD = Low when an error occurs. FPGA_TC (IC8300) continues monitoring PGOOD after start. Both powers are turned off when this abnormal state (PGOOD = Low) continues for approximately 100 msec.
“Panel power error” appears on the LED display of the front panel when the power is turned off during occurrence of an error.

3-2. G1 Board

The G1 board mounts AC/DC converter and DC/DC converter.

3-3. G2 Board

The G2 board mounts DC/DC converter and fan control circuit.

3-4. QB Board

The QB board performs input/output terminal, signal processing, audio processing and system control.

3-5. H1 Board

The H1 board mounts the control switches on the front panel.

3-6. H2 Board

The H2 board mounts a headphone output terminal.

3-7. X Board


The X board mounts a tally LED.

3-8. S Board


The S board mounts a temperature sensor.

Section 4
Troubleshooting

4-1. System Does Not Start

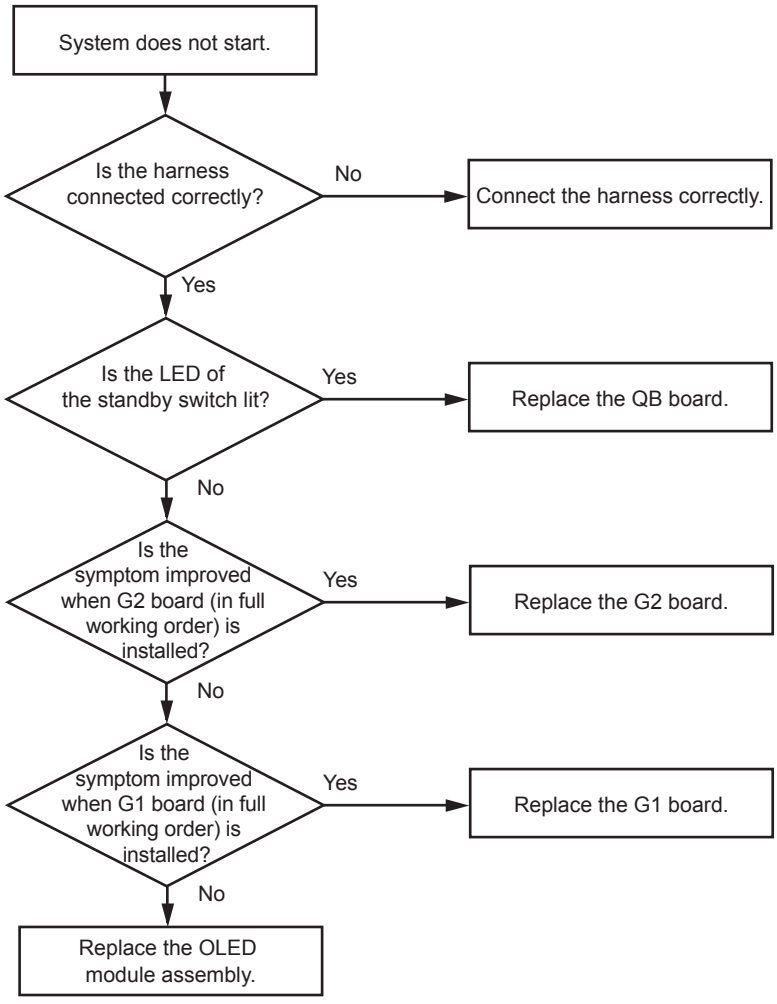


4-2. Control Operation of This Unit Is Abnormal

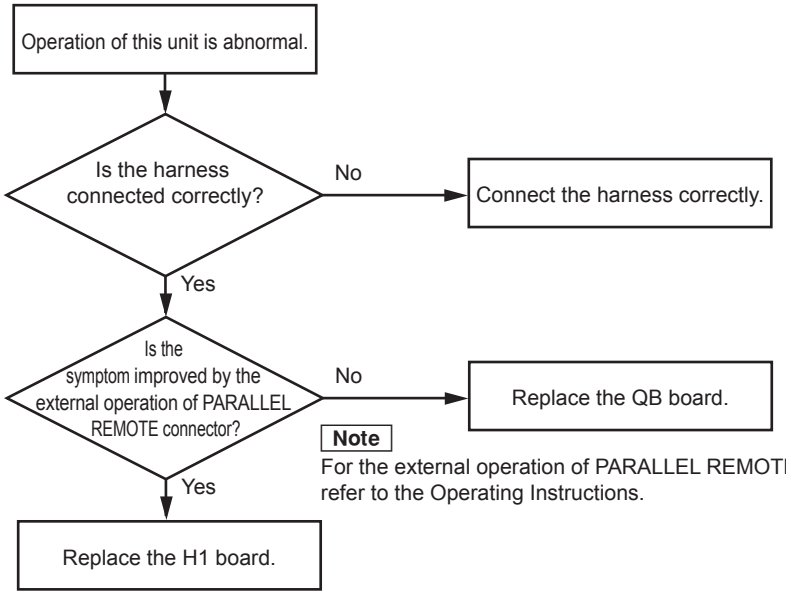


Note

For the external operation of PARALLEL REMOTE connector, refer to the Operating Instructions.


4-3. Image Is Abnormal

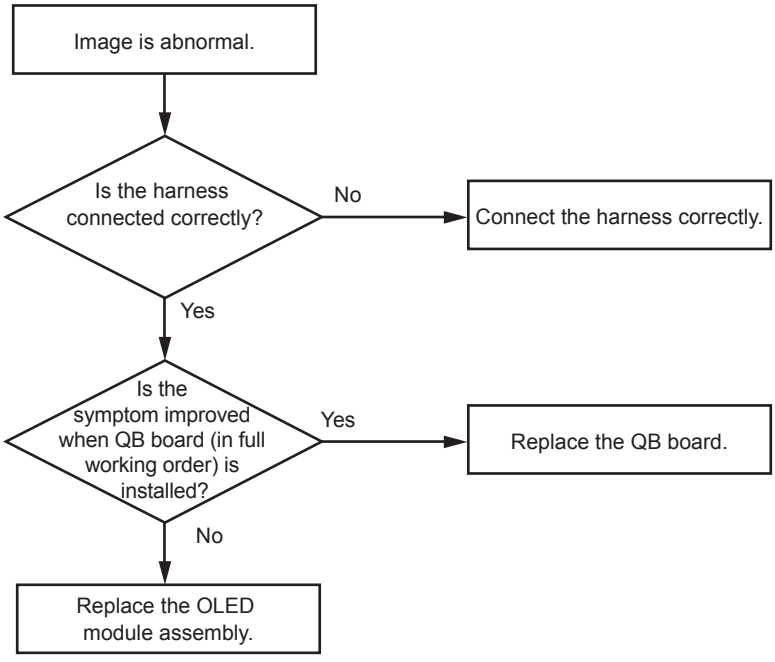

4-4. TALLY Lamp Is Not Lit

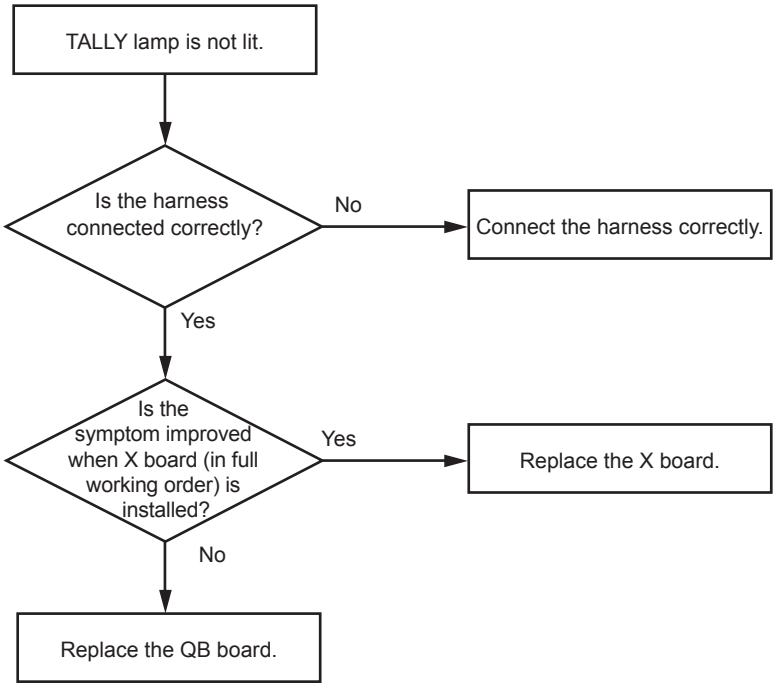

4-5. Fan Is Abnormal

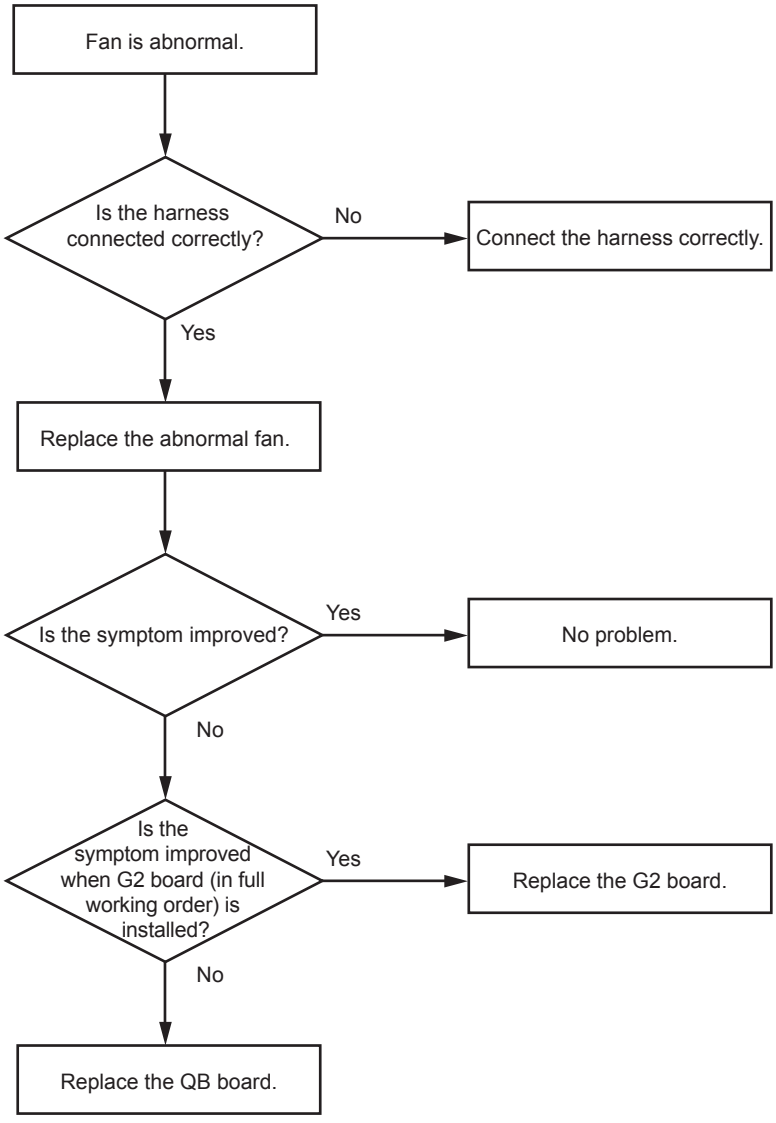

Section 5
Spare Parts

5-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

The components identified by mark 🔒 contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

5-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。

3. 部品の在庫

部品表の SP（Supply code）欄に "o" で示される部品は在庫していないことがあり，納期が長くなることがあります。


4. ハーネス

部品番号の記載されていないハーネスは，サービス部品として登録されていません。

🔒印の部分には，秘密情報が含まれています。
修理の際は，指示に従った対応を行ってください。

5-2. Exploded Views


PVM-1741
S/N 3000001 and higher (SY)
S/N 7000001 to 7099999 (SY)
S/N 5000001 and higher (CN)
PVM-1741A
S/N 3000001 to 3100000 (SY)
S/N 5000001 to 5100000 (CN)

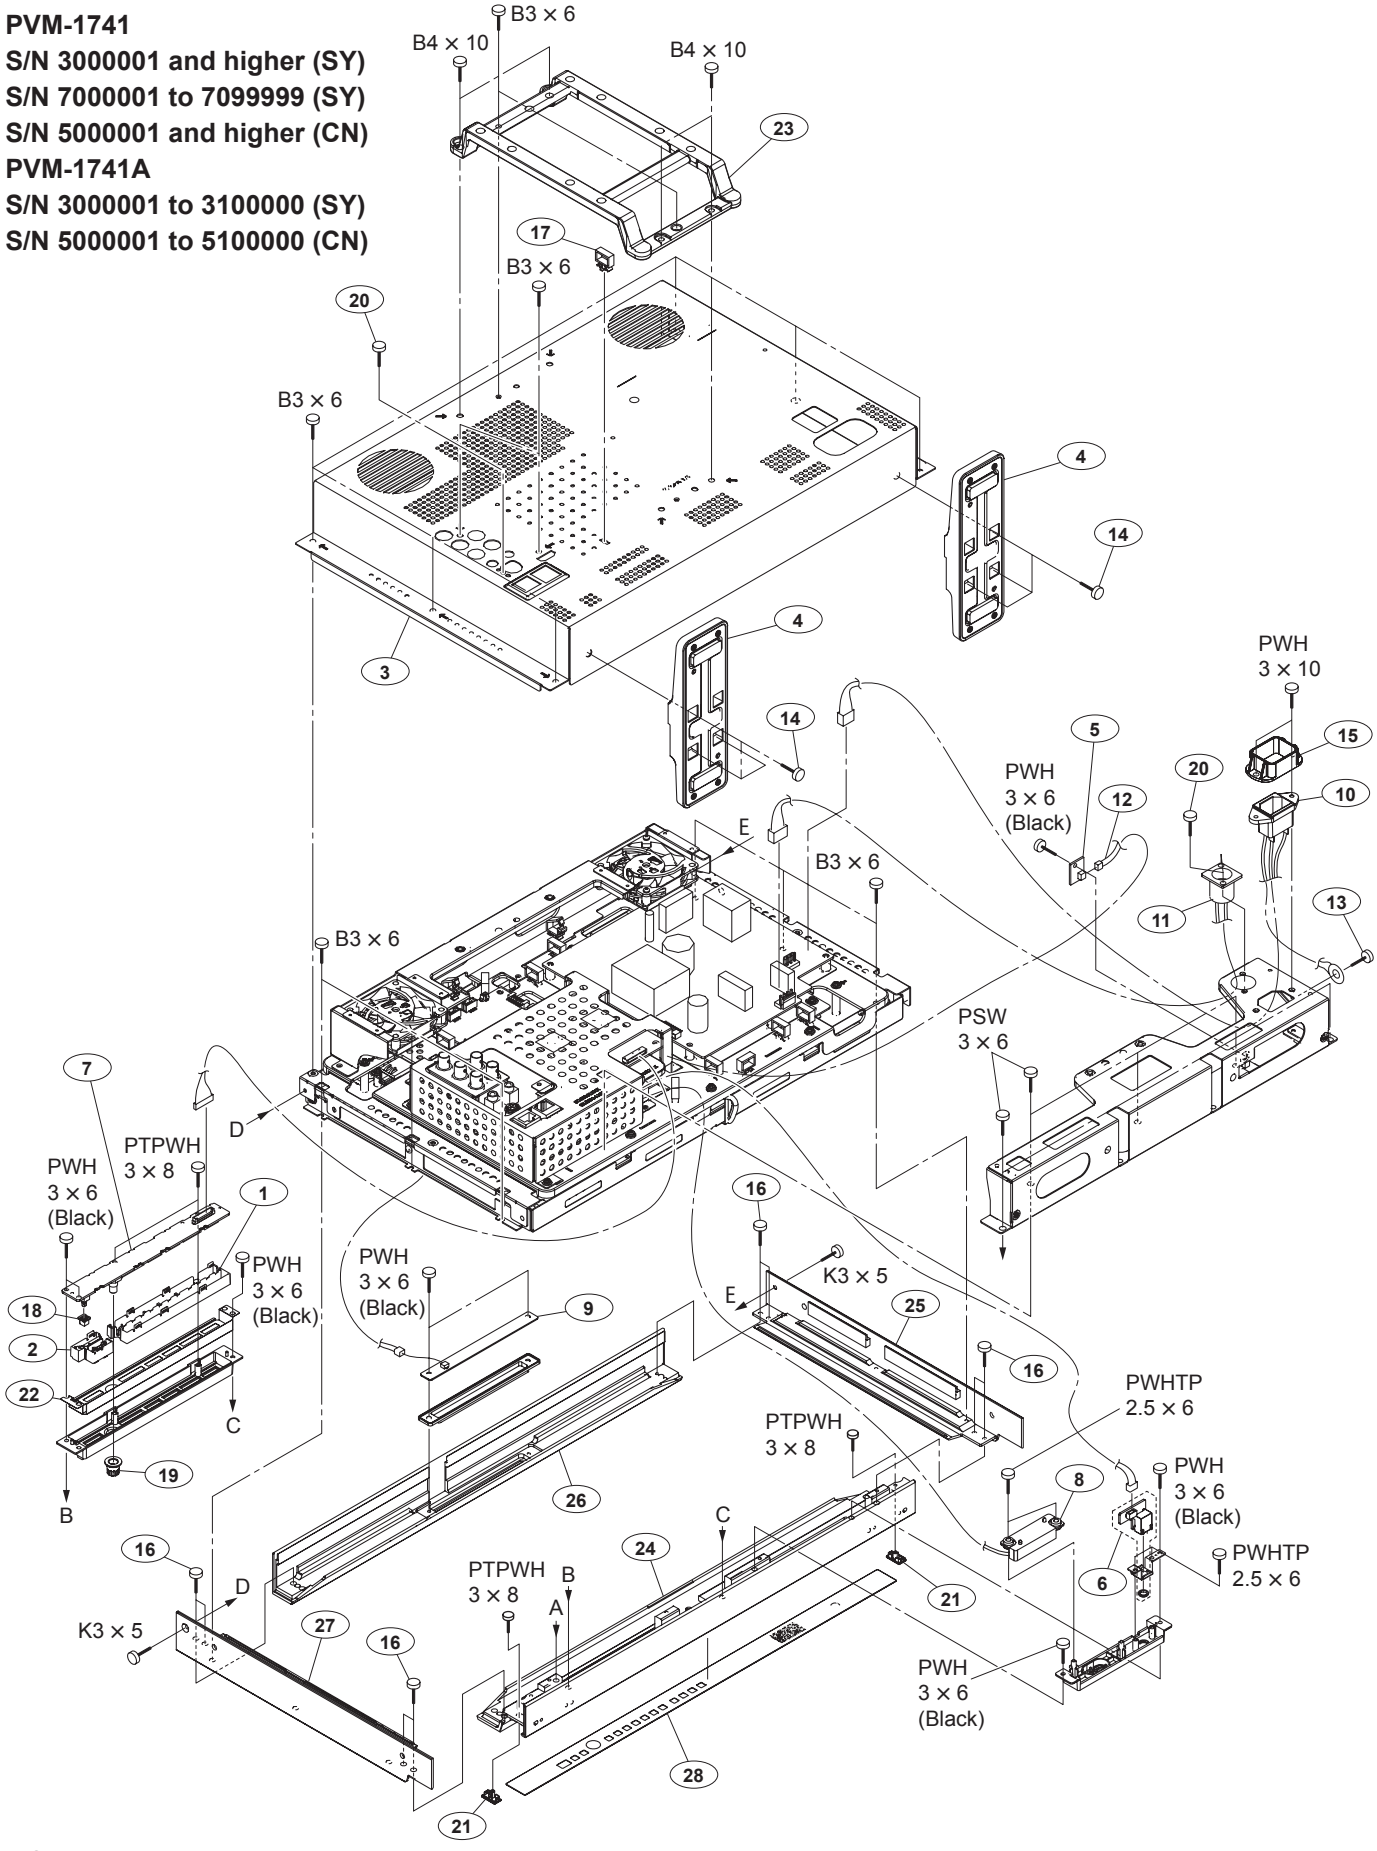

No.	Part No.	SP	Description
1	X-2560-420-1	s	KEYPAD ASSY, INPUT
2	X-2580-278-2	s	KEYPAD ASSY, CONTROL
3	X-2582-454-2	s	COVER ASSY, REAR
4	X-2582-456-1	s	STAND ASSY
5	1-789-265-11	s	MOUNTED CIRCUIT BOARD, S
6	1-857-413-11	s	MOUNTED CIRCUIT BOARD, H2
7	1-857-863-11	s	MOUNTED CIRCUIT BOARD, H1
8	1-858-684-21	s	SPEAKER
9	1-895-006-11	s	MOUNTED CIRCUIT BOARD, X
10	⚠ 1-910-401-34	s	INLET ASSY, AC
11	⚠ 1-910-401-35	s	CONNECTOR ASSY (DC IN)
12	1-910-401-43	o	CONNECTOR ASSY, PH-DF13 2P
13	2-434-609-11	s	SCREW (M4X8 CR)
14	2-580-593-01	s	SCREW, +PSW M3X8
15	2-990-241-02	s	HOLDER (A), PLUG
16	3-725-295-21	s	SCREW, (+) (B3)
17	4-098-147-31	s	CLAMP
18	4-146-124-02	s	BUTTON, STANDBY
19	4-146-125-03	s	KNOB, ROTARY ENCODER
20	4-148-038-01	s	SCREW F 2.5X6
21	4-262-134-01	s	COVER, MYLAR
22	4-262-141-01	s	SHIELD, KEYPAD
23	4-264-922-01	s	FRAME, VESA
24	4-289-201-01	s	BEZEL LOWER
25	4-289-202-01	s	BEZEL LEFT
26	4-289-203-01	s	BEZEL UPPER
27	4-289-204-01	s	BEZEL RIGHT
28	4-289-205-01	s	MYLAR, KEYPAD
	7-681-000-61	s	TAPPING +PWH 3X8 TYPE2 N-S
	7-682-246-09	s	SCREW +K 3X5
	7-682-547-09	s	SCREW +B 3X6
	7-682-562-09	s	SCREW +B 4X10
	7-682-903-19	s	SCREW +PWH 3X6
	7-682-903-21	s	SCREW +PWH 3X8
	7-682-903-39	s	SCREW +PWH M3X10
	7-682-947-01	s	SCREW +PSW 3X6


Cover Block

PVM-1741A
S/N 3100001 and higher (SY)
S/N 5100001 and higher (CN)

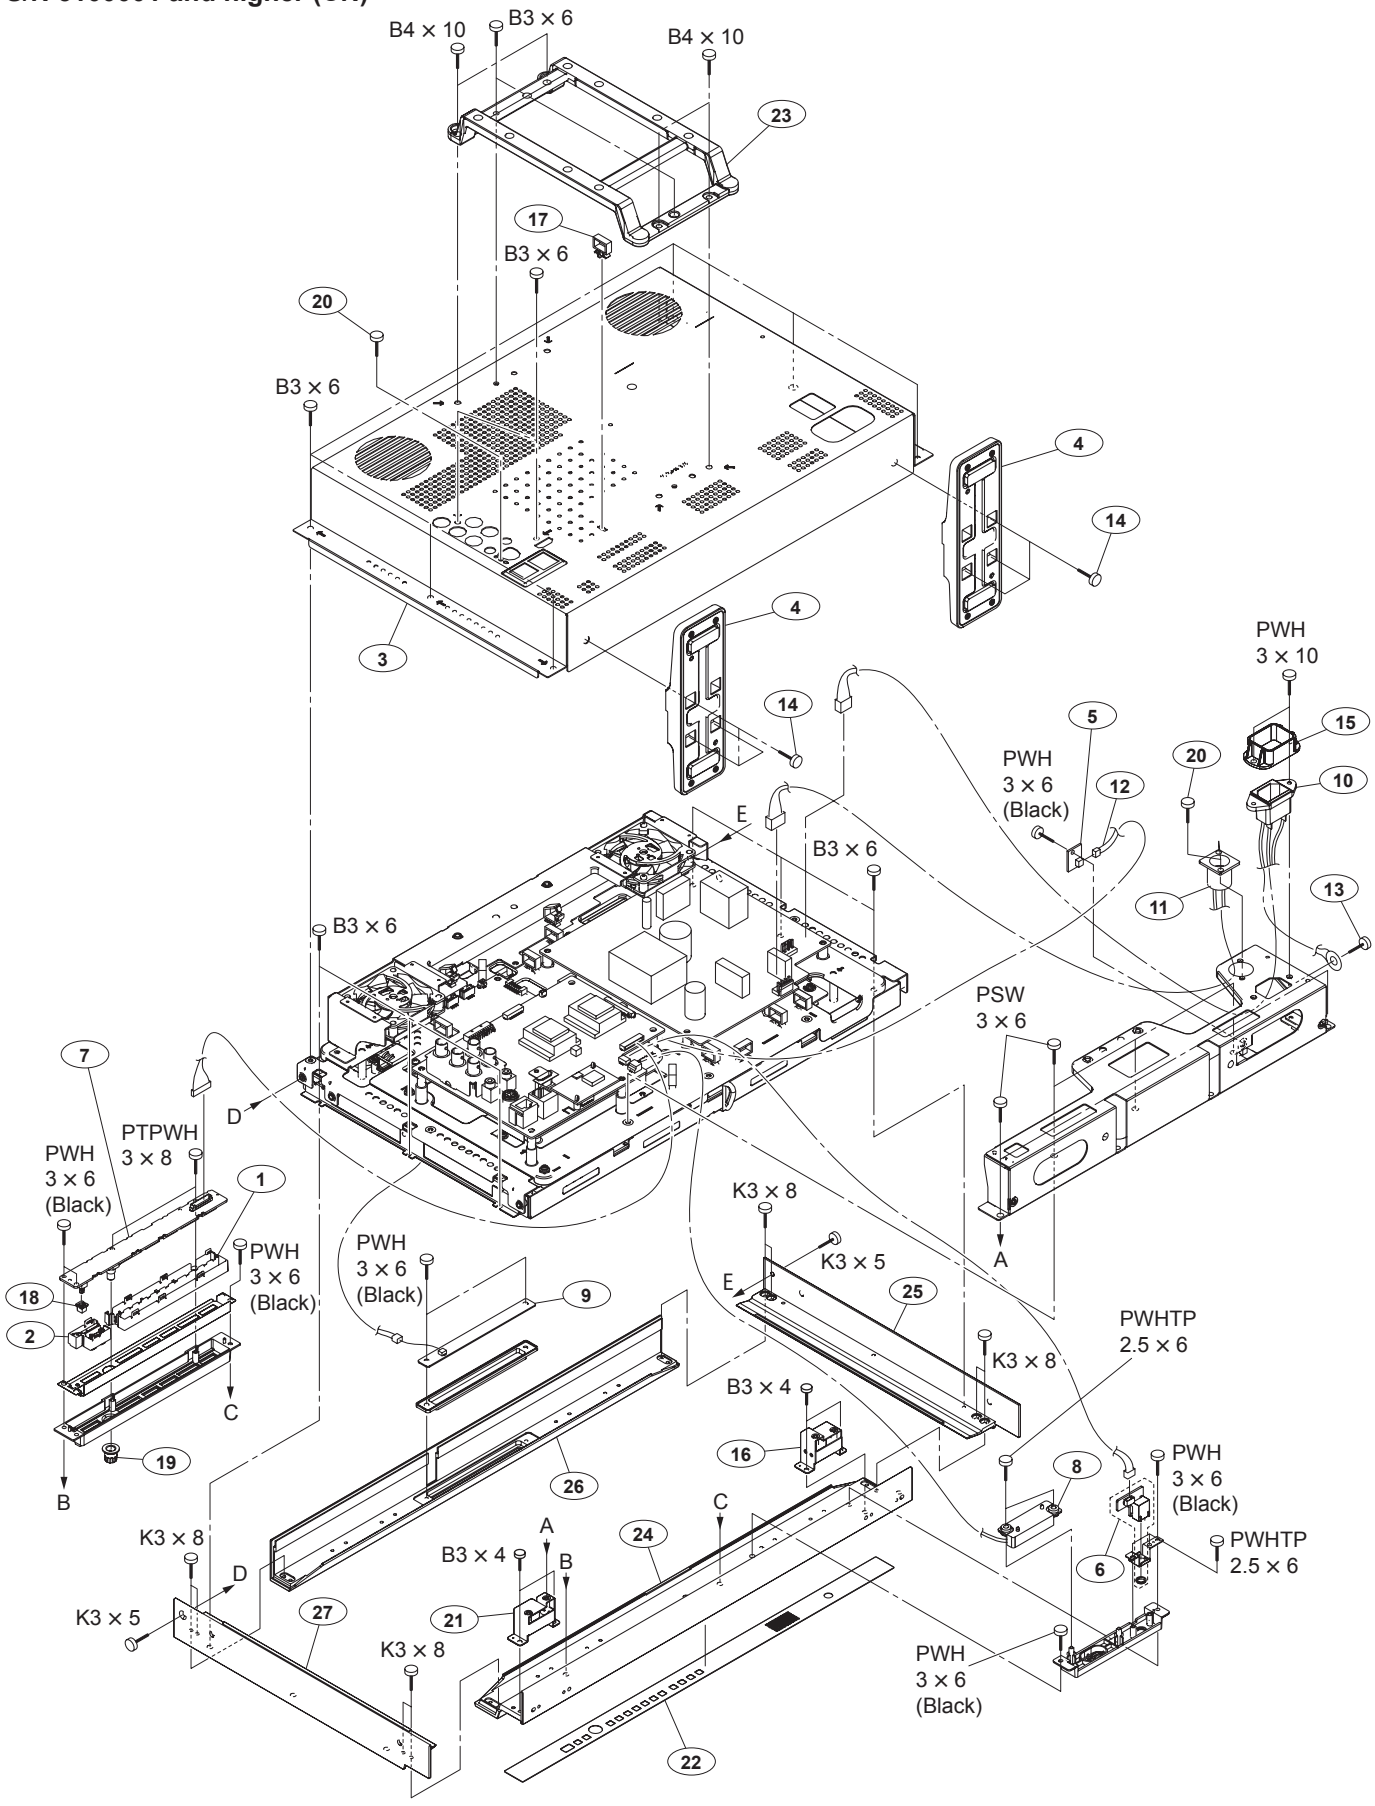


No.	Part No.	SP	Description
1	X-2560-420-1	s	KEYPAD ASSY, INPUT
2	X-2580-278-2	s	KEYPAD ASSY, CONTROL
3	X-2582-454-2	s	COVER ASSY, REAR
4	X-2582-456-1	s	STAND ASSY
5	1-789-265-11	s	MOUNTED CIRCUIT BOARD, S
6	1-857-413-11	s	MOUNTED CIRCUIT BOARD, H2
7	1-857-863-11	s	MOUNTED CIRCUIT BOARD, H1
8	1-858-684-21	s	SPEAKER
9	1-895-006-11	s	MOUNTED CIRCUIT BOARD, X
10	⚠ 1-910-401-34	s	INLET ASSY, AC
11	⚠ 1-910-401-35	s	CONNECTOR ASSY (DC IN)
12	1-910-401-43	o	CONNECTOR ASSY, PH-DF13 2P
13	2-434-609-11	s	SCREW (M4X8 CR)
14	2-580-593-01	s	SCREW, +PSW M3X8
15	2-990-241-02	s	HOLDER (A), PLUG
16	4-488-150-01	s	BRACKET, BEZEL(R)
17	4-098-147-31	s	CLAMP
18	4-146-124-02	s	BUTTON, STANDBY
19	4-146-125-03	s	KNOB, ROTARY ENCODER
20	4-148-038-01	s	SCREW F 2.5X6
21	4-488-151-01	s	BRACKET, BEZEL(L)
22	4-488-154-01	s	MYLAR, KEYPAD
23	4-264-922-01	s	FRAME, VESA
24	4-289-201-03	s	BEZEL LOWER
25	4-289-202-02	s	BEZEL LEFT
26	4-289-203-02	s	BEZEL UPPER
27	4-289-204-02	s	BEZEL RIGHT
	7-681-000-61	s	TAPPING +PWH 3X8 TYPE2 N-S
	7-682-246-09	s	SCREW +K 3X5
	7-682-248-04	s	SCREW +K 3X8
	7-682-545-09	s	SCREW +B 3X4
	7-682-547-09	s	SCREW +B 3X6
	7-682-562-09	s	SCREW +B 4X10
	7-682-903-19	s	SCREW +PWH 3X6
	7-682-903-21	s	SCREW +PWH 3X8
	7-682-903-39	s	SCREW +PWH M3X10
	7-682-947-01	s	SCREW +PSW 3X6

Chassis Block

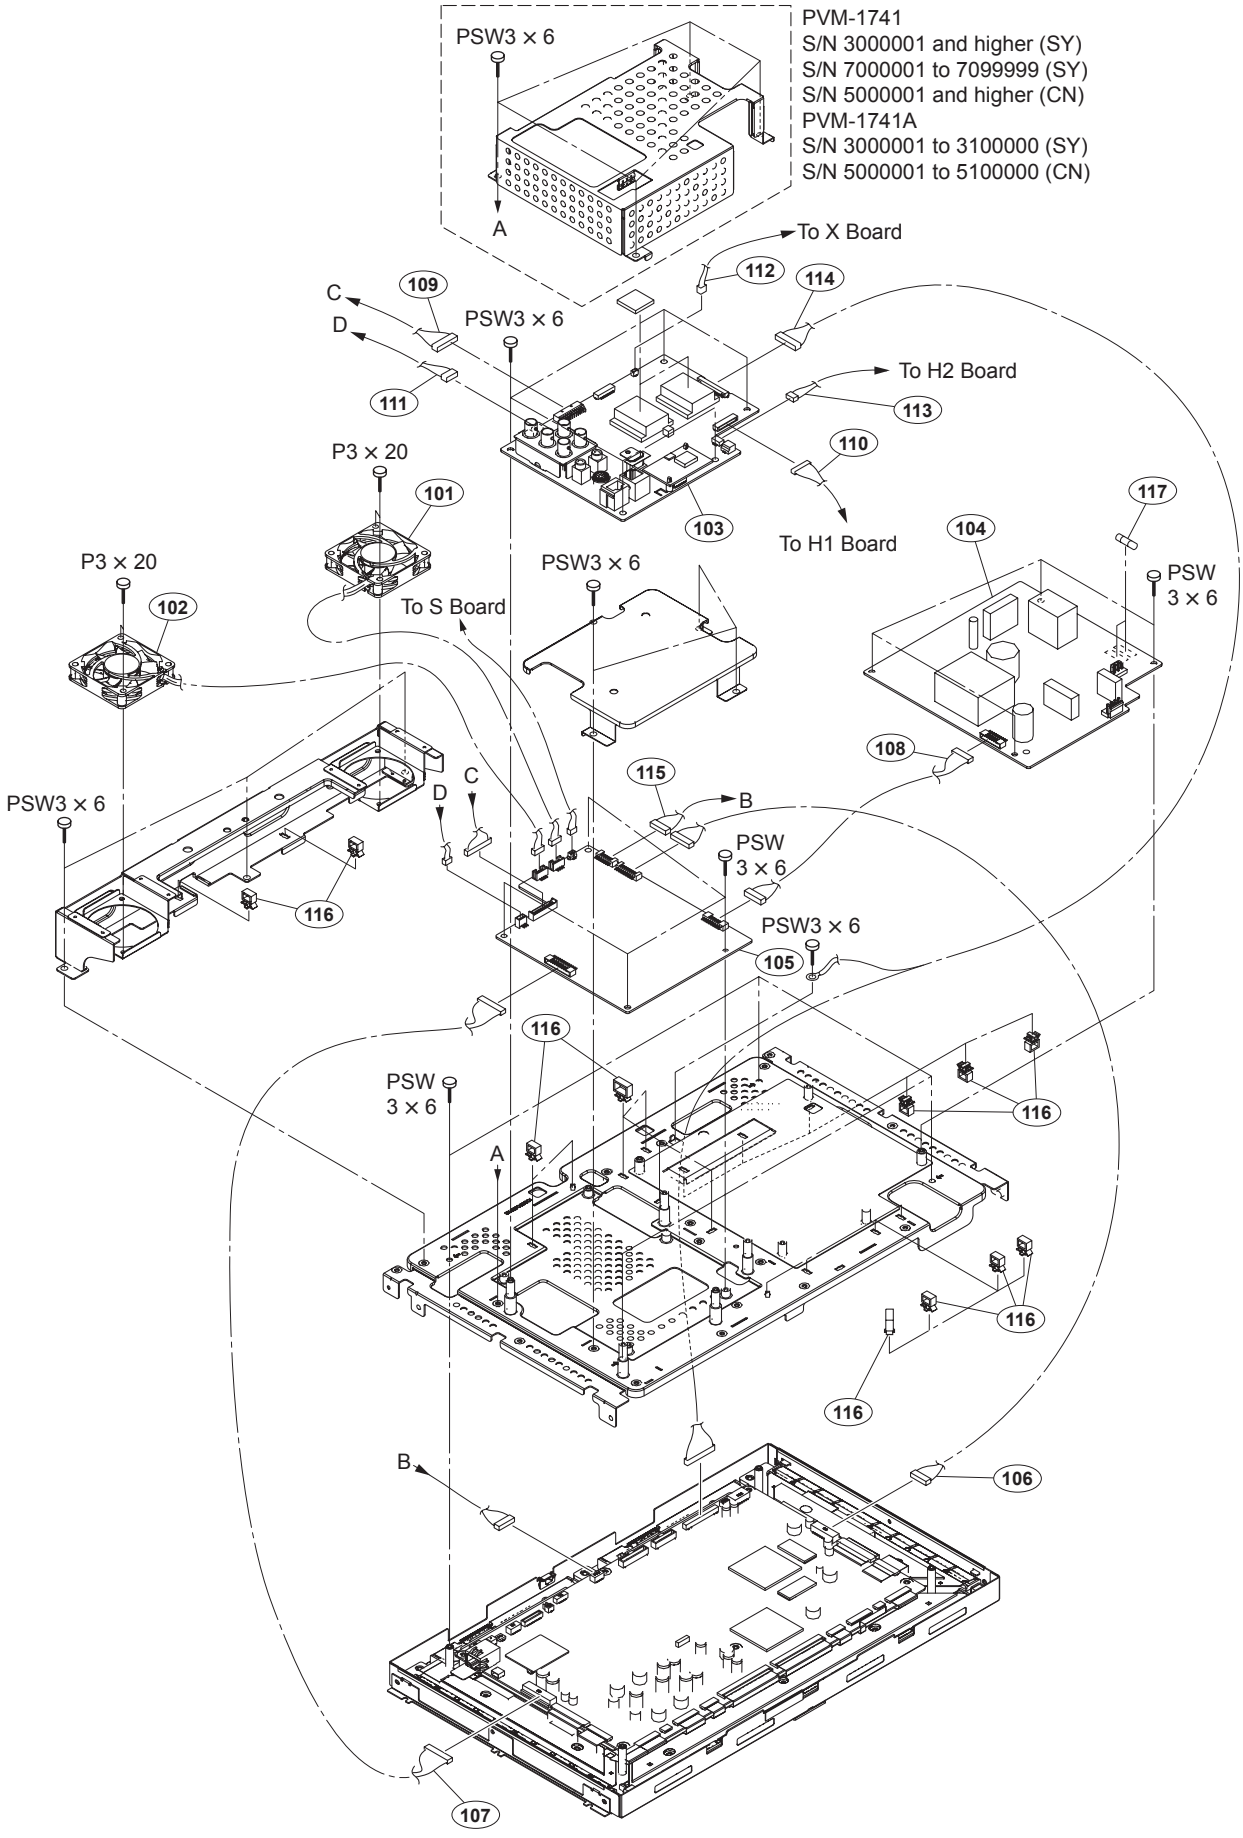

No.		Part No.	SP	Description
101		1-855-130-11	s	DC FAN (Harness:75 mm)
102		1-855-130-21	s	DC FAN (Harness:250 mm)
103	🔒	1-895-004-21	s	MOUNTED CIRCUIT BOARD, QB (for PVM-1741) (S/N 3000001 to 3100000 (SY)) (S/N 7000001 to 7099999 (SY)) (S/N 5000001 to 5100000 (CN))
	🔒	1-895-004-51	s	MOUNTED CIRCUIT BOARD, QB (for PVM-1741) (S/N 3100001 and higher (SY)) (S/N 5100001 and higher (CN))
	🔒	1-895-004-91	s	MOUNTED CIRCUIT BOARD, QB (for PVM-1741A) (S/N 3000001 and higher (SY)) (S/N 5000001 and higher (CN))
104	⚠	1-895-075-11	s	MOUNTED CIRCUIT BOARD, G1
105		1-895-076-12	s	MOUNTED CIRCUIT BOARD, G2
106		1-910-401-36	o	CONNECTOR ASSY, PAP 10P(PANEL)
107		1-910-401-37	o	CONNECTOR ASSY, PAP 13P
108		1-910-401-38	o	CONNECTOR ASSY, PAP 10P
109		1-910-401-39	o	CONNECTOR ASSY, PHDR 24P
110		1-910-401-40	o	CONNECTOR ASSY, DF13 15P
111		1-910-401-41	o	CONNECTOR ASSY, SHR 3P
112		1-910-401-42	o	CONNECTOR ASSY, PH-DF13 3P
113		1-910-401-44	o	CONNECTOR ASSY, DF13 4P
114		1-910-401-45	s	CONNECTOR ASSY, LVDS 41-51P
115		1-967-985-11	o	SUB HARNESS(CONNECTOR ASSY 8P)
116		4-098-147-31	s	CLAMP
117	⚠	1-576-233-51	s	FUSE (H.B.C.) 6.3A/250V (F601/F602)
		7-682-153-01	s	SCREW +P 3X20
		7-682-947-01	s	SCREW +PSW 3X6

OLED Block

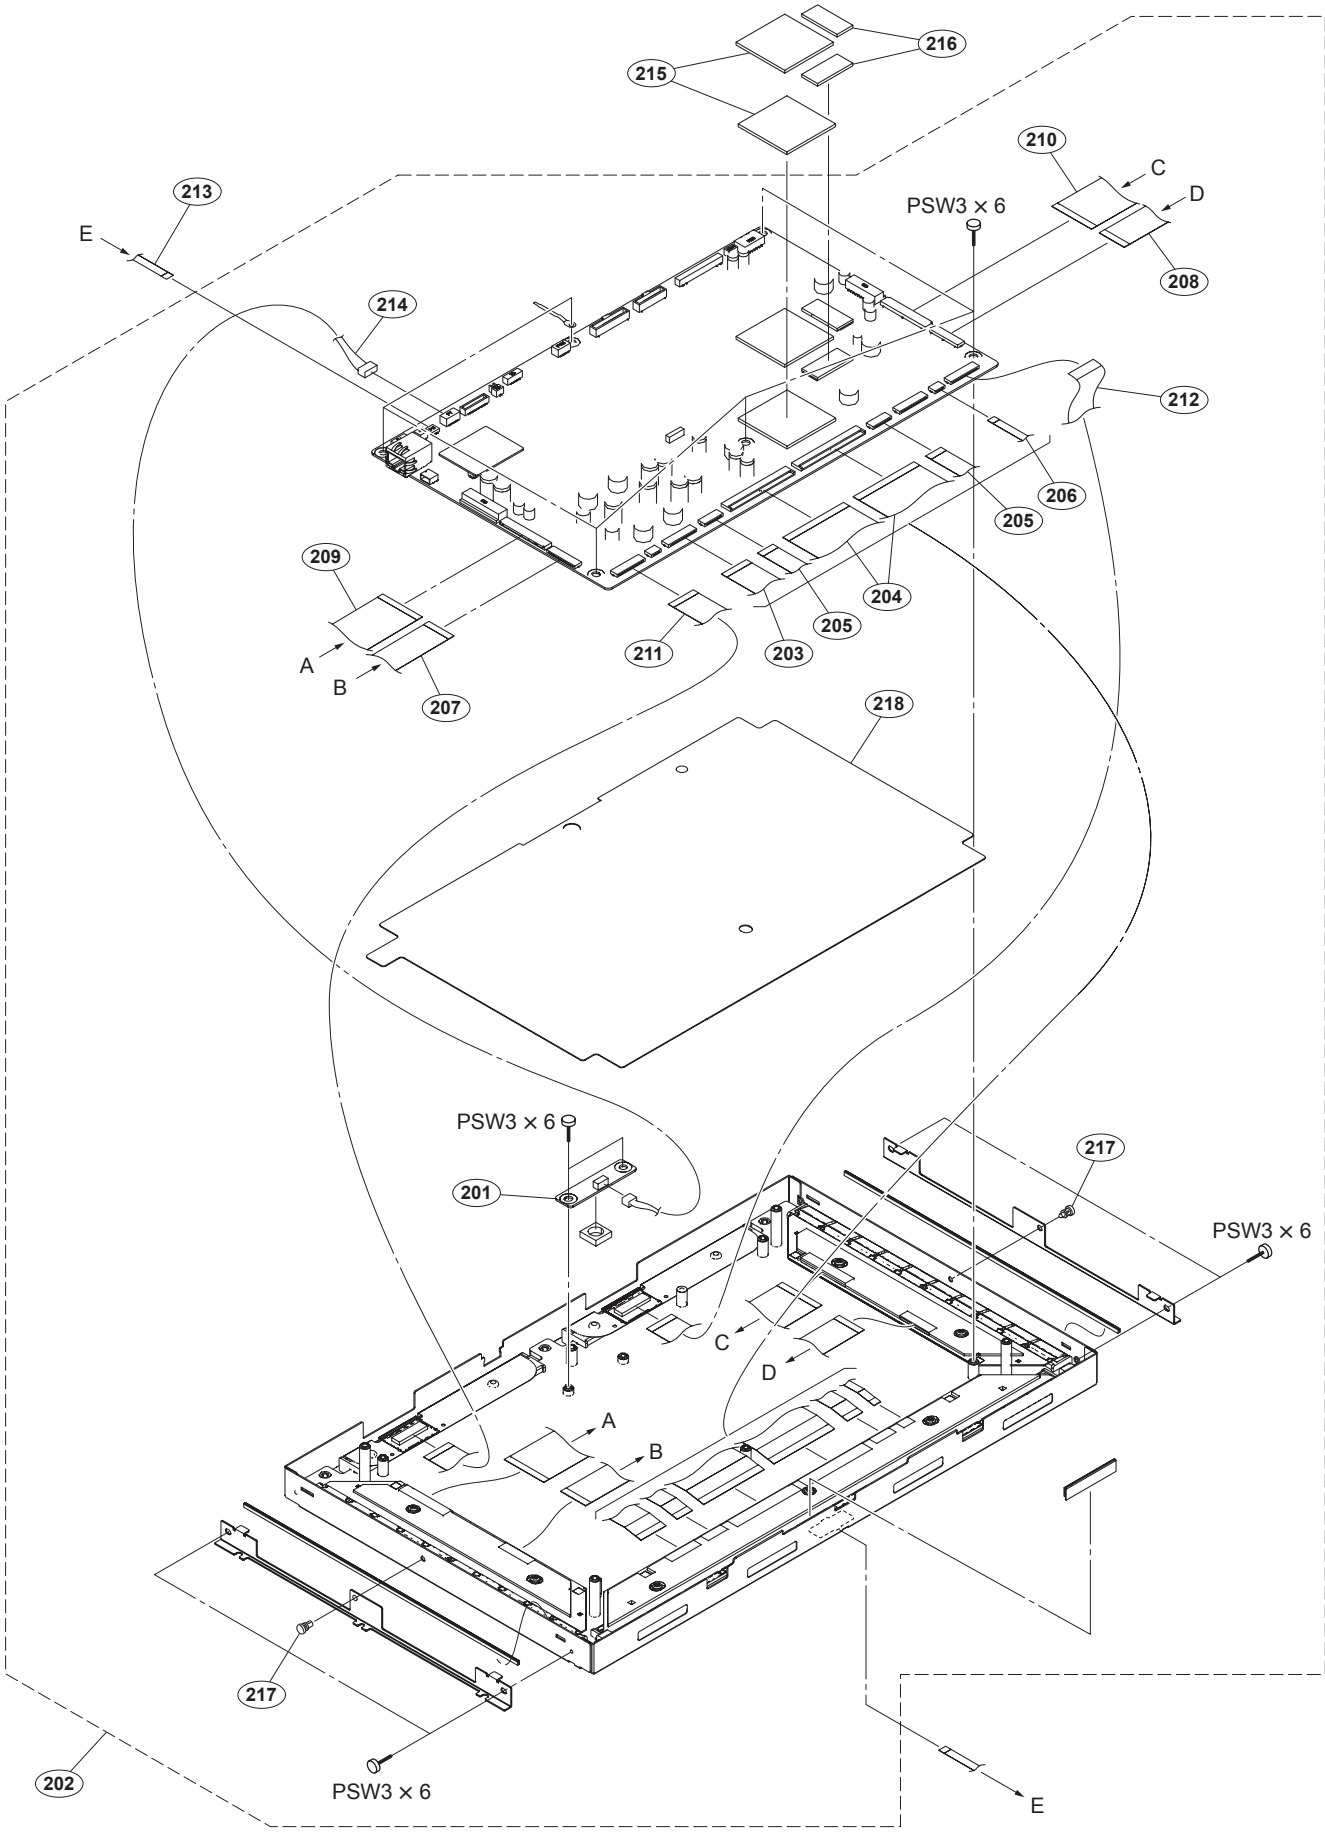
216
215
210
C
D
213
E
PSW3 × 6
208
214
212
206
205
209
204
205
A
B
211
203
207
218
PSW3 × 6
201
217
PSW3 × 6
C
D
A
B
217
202
PSW3 × 6
E

No.	Part No.	SP	Description
201	A-1819-657-A	s	MOUNTED CIRCUIT BOARD, PT1
202	A-1866-053-A	s	MODULE ASSY (SERVICE), OLED (for PVM-1741)
	A-1938-239-A	s	MODULE ASSY (SVC A), OLED (for PVM-1741A)
203	1-839-158-11	o	FLEXIBLE FLAT CABLE 40P
204	1-839-159-11	o	FLEXIBLE FLAT CABLE 96P
205	1-839-160-11	o	FLEXIBLE FLAT CABLE 24P
206	1-839-161-11	o	FLEXIBLE FLAT CABLE 10P
207	1-839-162-11	o	FLEXIBLE FLAT CABLE 40P
208	1-839-163-11	o	FLEXIBLE FLAT CABLE 40P
209	1-839-164-11	o	FLEXIBLE FLAT CABLE 64P
210	1-839-165-11	o	FLEXIBLE FLAT CABLE 64P
211	1-839-166-11	o	FLEXIBLE FLAT CABLE 40P
212	1-839-167-11	o	FLEXIBLE FLAT CABLE 40P
213	1-839-168-11	o	FLEXIBLE FLAT CABLE 6P
214	1-910-400-96	s	JAM-GH CONNECTOR ASSY 9-4P
215	3-214-898-01	s	SHEET, RADIATION
216	3-283-231-01	s	SHEET (C), RADIATION
217	3-531-576-51	o	RIVET
218	4-265-844-11	s	INSULATED PLATE (BC)
	7-621-772-10	s	SCREW +B 2X4
	7-682-145-01	s	SCREW +P 3X4
	7-682-947-01	s	SCREW +PSW 3X6

5-3. Electrical Parts List

BC BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1000	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1001	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1002	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1003	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1004	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1005	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1006	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1007	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1008	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1009	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1010	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1011	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1012	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1013	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1014	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1015	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1016	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1017	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C1018	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1019	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1020	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1021	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C1022	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2000	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2001	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2002	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2003	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2004	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2005	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2006	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2007	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2008	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2009	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2010	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2011	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2012	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C2013	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2151	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C2152	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C2153	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2154	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2155	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2156	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2157	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2158	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2159	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2160	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2161	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2162	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2163	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2164	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2165	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2166	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2167	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2168	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2169	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2171	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2172	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2173	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2174	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2175	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2176	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2177	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2178	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2179	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2180	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2181	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2182	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2183	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2184	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2185	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2186	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2187	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2188	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2189	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2190	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2191	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2192	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2194	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2195	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2196	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2197	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2198	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2199	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2200	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2201	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2202	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2203	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2204	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2206	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2207	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2216	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2217	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2218	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2300	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2301	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2302	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2303	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2304	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2305	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2306	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2307	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2308	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2309	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2310	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2311	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2312	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2314	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2315	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2316	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2317	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2318	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2319	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2320	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2321	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2322	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2323	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2324	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2325	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2326	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2327	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2328	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2329	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2330	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2331	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2332	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2334	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2335	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2336	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2337	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2338	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2339	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2340	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2341	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2342	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2343	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2344	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2345	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2350	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2352	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2353	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2354	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2355	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2356	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2359	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2500	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2501	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2502	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2503	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2504	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2505	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2506	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2507	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2700	1-114-333-11	s	CAP, CERAMIC 47MF X6S 3216
C2701	1-114-871-11	s	CAP, CERAMIC 100MF X6S 3225
C2702	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2704	1-114-869-11	s	CAP, CERAMIC 2.2MF X6S 1608
C2705	1-114-869-11	s	CAP, CERAMIC 2.2MF X6S 1608
C2706	1-114-869-11	s	CAP, CERAMIC 2.2MF X6S 1608
C2707	1-114-869-11	s	CAP, CERAMIC 2.2MF X6S 1608
C2708	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2709	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2710	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2711	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2712	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2713	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2714	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2715	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2716	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2717	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2718	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2719	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2720	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2721	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2722	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C2723	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2724	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2725	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C2726	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C2727	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C2728	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C2729	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C2730	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2731	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2732	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2733	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2734	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2735	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2736	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2737	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2738	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2739	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2740	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2741	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2742	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2743	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2744	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2745	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2746	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2747	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2748	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2749	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2750	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2751	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2752	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2753	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2754	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2755	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2756	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2757	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2758	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2759	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2760	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2761	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2762	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2763	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2764	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2765	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2766	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2767	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2768	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2769	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2770	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2771	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2772	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2773	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2774	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2775	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2776	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2777	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2778	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2779	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2780	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C2781	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C2782	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C2783	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2784	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2785	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2786	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2787	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2788	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2789	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2790	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2791	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2792	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2793	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2794	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2795	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2796	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2797	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2798	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2799	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2800	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2801	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2802	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2803	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2804	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2805	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2806	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2807	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2808	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2809	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2810	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2811	1-114-333-11	s	CAP, CERAMIC 47MF X6S 3216
C2812	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2813	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2814	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2815	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2816	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2817	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2818	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2819	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2820	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2821	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2822	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2823	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2824	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2825	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2826	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2827	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2828	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2829	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2830	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2831	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2832	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2833	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2834	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2835	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2836	1-114-869-11	s	CAP, CERAMIC 2.2MF X6S 1608
C2837	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2838	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2839	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2840	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2841	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C2842	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2843	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2844	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C2845	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2846	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C2847	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3000	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3001	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3002	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3007	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3008	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3013	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3100	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C3101	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C3102	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3103	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3106	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C3107	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C3108	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3109	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3112	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3113	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3114	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3115	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3116	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3117	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3118	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3119	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3120	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3121	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3122	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3123	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3124	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3125	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3126	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3127	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3129	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3130	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3131	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3132	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3134	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3135	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3136	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3137	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3138	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3139	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3140	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3141	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3142	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3143	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3144	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3150	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3152	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C3155	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3157	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C3158	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3200	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3201	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3202	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3203	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3204	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3205	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3206	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C3209	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3210	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3211	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3212	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3213	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3214	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3215	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3216	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3217	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3218	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3219	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3220	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3221	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3222	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3223	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3224	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3225	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3226	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3227	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3228	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3229	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3230	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3231	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C3316	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3317	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3318	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3319	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3320	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C3321	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C3322	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3400	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C3401	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3402	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3403	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3404	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3405	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3406	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C3407	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3408	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3409	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3410	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3411	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C3412	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3413	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3414	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3415	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3416	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3417	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3418	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3419	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C3420	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3421	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3422	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3423	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3424	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C3425	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3426	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005
C3600	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C3601	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3602	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3603	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3604	1-114-326-11	s	CAP, CERAMIC 0.22MF X7R 1608
C3605	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3606	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3607	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3608	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C3609	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3610	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C3611	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C3612	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3613	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3614	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3615	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3616	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3617	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3618	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3619	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3620	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3621	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3622	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3623	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3624	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3625	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3800	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3801	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3802	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3803	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3804	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3805	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3806	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3807	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3808	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3809	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3810	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3811	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3812	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3813	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3814	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3815	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3816	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3817	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3818	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3819	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3820	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3821	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3822	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3823	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3824	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3825	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3826	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C3827	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4001	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4003	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4004	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C4007	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4008	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4009	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4010	1-112-774-11	s	CAP, CERAMIC 470PF X7R 1005
C4013	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4014	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4015	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4016	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4017	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4018	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4019	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4020	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4021	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4022	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4023	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4024	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4025	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4026	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4027	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4028	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4029	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4030	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4031	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4032	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C4033	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C4034	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C4035	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C4037	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C4038	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7000	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7001	1-114-800-11	s	CAP, CERAMIC 1500PF X7R 1005
C7002	1-116-099-11	s	CAP, ELECT 100MF 105
C7003	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7004	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005
C7005	1-116-099-11	s	CAP, ELECT 100MF 105
C7006	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7007	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7008	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7009	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C7010	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7011	1-116-099-11	s	CAP, ELECT 100MF 105
C7012	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7013	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7014	1-114-333-11	s	CAP, CERAMIC 47MF X6S 3216
C7015	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C7016	1-116-099-11	s	CAP, ELECT 100MF 105
C7017	1-112-781-11	s	CAP, CERAMIC 1MF X7R 1608
C7021	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7022	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7023	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7024	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7036	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C7037	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7039	1-116-099-11	s	CAP, ELECT 100MF 105
C7040	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7041	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7100	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7101	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C7102	1-116-099-11	s	CAP, ELECT 100MF 105
C7103	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7104	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7105	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7106	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C7107	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C7108	1-137-942-21	s	CAP, ELECT 47MF (6.3X5.4)
C7109	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C7111	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C7112	1-116-099-11	s	CAP, ELECT 100MF 105
C7113	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7114	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7115	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7116	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7117	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7118	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C7119	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7120	1-116-099-11	s	CAP, ELECT 100MF 105
C7121	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7122	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7123	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7124	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C7125	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C7126	1-116-099-11	s	CAP, ELECT 100MF 105
C7127	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7128	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7129	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7130	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C7131	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7132	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7133	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7134	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7135	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C7136	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C7138	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7139	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7140	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7143	1-112-781-11	s	CAP, CERAMIC 1MF X7R 1608
C7144	1-112-775-11	s	CAP, CERAMIC 2200PF X7R 1005
C7147	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7148	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7149	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C7151	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7152	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C7153	1-112-781-11	s	CAP, CERAMIC 1MF X7R 1608
C7154	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8000	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8001	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8002	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8003	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8004	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8005	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8006	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8007	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8008	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8009	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8010	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8011	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8012	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8013	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8014	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8015	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8016	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8020	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8021	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8022	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8023	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8024	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8025	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8026	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8027	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8030	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8031	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8032	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8034	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8035	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8036	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8037	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8038	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8039	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8040	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8041	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8042	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8043	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8044	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8045	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8046	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8047	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8048	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8049	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8050	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8051	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8052	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8053	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8054	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8055	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8056	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8057	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8100	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8101	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8102	1-115-670-21	s	CAP, CHIP ELECT 220MF
C8103	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C8104	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C8105	1-115-670-21	s	CAP, CHIP ELECT 220MF
C8106	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8107	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8108	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8109	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8110	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8111	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8112	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8113	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8114	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8115	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8116	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8117	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8118	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8119	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8121	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8122	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8123	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8124	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8125	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8126	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8127	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8128	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8129	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8130	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8131	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8132	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8133	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8134	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8135	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8136	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8137	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8138	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8139	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8140	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8141	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8142	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8143	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8144	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8145	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8146	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8147	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8148	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8149	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8150	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8151	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8152	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8153	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8154	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8155	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8156	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8157	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8159	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8160	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8161	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8162	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8163	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8164	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8165	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8166	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8167	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8168	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8169	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8170	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8171	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8172	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8173	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8174	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8175	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8176	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8177	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8178	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8179	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8180	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8181	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8182	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8183	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8184	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8185	1-112-064-11	s	CAP, CERAMIC 2.2MF X7R 2012
C8188	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8189	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8190	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8191	1-116-716-11	s	CAP, CERAMIC 10MF X6S 2012
C8200	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8201	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8202	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8203	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8204	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8205	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8206	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8207	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8208	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8209	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8210	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8211	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8212	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8213	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8214	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8215	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8216	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8217	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8218	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8219	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8220	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8221	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8222	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8223	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8224	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8225	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8226	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8227	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8228	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8229	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8230	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8231	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8232	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8233	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8234	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8235	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C8300	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C8400	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8401	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8402	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8403	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8404	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8405	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8406	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8407	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8408	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8409	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8410	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8411	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8412	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8413	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8414	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8415	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8416	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8417	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8418	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8419	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8420	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8421	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8422	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8423	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8424	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8425	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8426	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8427	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8428	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8429	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8430	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8431	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8432	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8433	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8434	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8435	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8436	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8437	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8438	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8439	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8440	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8441	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8442	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8443	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8444	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8445	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8446	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8447	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8448	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8449	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8450	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8451	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8452	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8453	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8454	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8455	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8456	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8457	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8458	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8459	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8460	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8461	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8462	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8463	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8464	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8465	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8466	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8467	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8468	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8469	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8470	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8471	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8472	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8473	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8500	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8501	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8502	1-114-334-11	s	CAP, CERAMIC 10MF X7R 3225
C8503	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8504	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8505	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8506	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8507	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8508	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8509	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8510	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8511	1-100-905-11	s	CAP, CERAMIC1000PF X7R 1005
C8600	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005
C8601	1-114-331-11	s	CAP, CERAMIC 4.7MF X7R 2012
C8602	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8603	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8604	1-114-320-11	s	CAP, CERAMIC 0.22MF X6S 1005
C8605	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C8606	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8607	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8608	1-114-553-11	s	CAP, CERAMIC 10MF X6S 3216
C8609	1-114-553-11	s	CAP, CERAMIC 10MF X6S 3216
C8610	1-114-553-11	s	CAP, CERAMIC 10MF X6S 3216
C8611	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8612	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8614	1-114-333-11	s	CAP, CERAMIC 47MF X6S 3216
C8615	1-114-333-11	s	CAP, CERAMIC 47MF X6S 3216
C8616	1-114-333-11	s	CAP, CERAMIC 47MF X6S 3216
C8617	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8618	1-116-166-11	s	CAP, CERAMIC 10MF X7R 3225
C8619	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005
C8620	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8621	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8622	1-114-800-11	s	CAP, CERAMIC 1500PF X7R 1005
C8623	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8624	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8625	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8626	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8627	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8628	1-100-909-11	s	CAP, CERAMIC 10MF X6S 2012
C8629	1-116-079-11	s	CAP, CERAMIC 10MF X6S 2012
C8630	1-112-775-11	s	CAP, CERAMIC 2200PF X7R 1005
C8632	1-112-781-11	s	CAP, CERAMIC 1MF X7R 1608
C8633	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8634	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8635	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8638	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8639	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8640	1-112-781-11	s	CAP, CERAMIC 1MF X7R 1608
C8641	1-100-916-11	s	CAP, CERAMIC 0.1MF X7R 1005
C8643	1-116-099-11	s	CAP, ELECT 100MF 105
C8644	1-116-099-11	s	CAP, ELECT 100MF 105
C8645	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C8646	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8647	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8648	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8649	1-114-130-11	s	CAP, CERAMIC 1MF X6S 1005
C8700	1-114-334-11	s	CAP, CERAMIC 10MF X7R 3225
C8701	1-114-334-11	s	CAP, CERAMIC 10MF X7R 3225

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8702	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C8703	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8704	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8705	1-112-775-11	s	CAP, CERAMIC 2200PF X7R 1005
C8706	1-114-331-11	s	CAP, CERAMIC 4.7MF X7R 2012
C8707	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8708	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8709	1-112-775-11	s	CAP, CERAMIC 2200PF X7R 1005
C8710	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C8712	1-112-068-11	s	CAP, CERAMIC 220PF X7R 1005
C8713	1-116-166-11	s	CAP, CERAMIC 10MF X7R 3225
C8714	1-116-166-11	s	CAP, CERAMIC 10MF X7R 3225
C8715	1-116-166-11	s	CAP, CERAMIC 10MF X7R 3225
C8716	1-116-166-11	s	CAP, CERAMIC 10MF X7R 3225
C8717	1-100-911-11	s	CAP, CERAMIC 4.7MF X7R (3216)
C8718	1-100-633-21	s	CAP, CHIP ELECT 47MF
C8719	1-128-536-21	s	CAP, CHIP ELECT 100MF
C8720	1-128-536-21	s	CAP, CHIP ELECT 100MF
C8721	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C8722	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005
C8723	1-112-776-11	s	CAP, CERAMIC 4700PF X7R 1005
C8724	1-112-777-11	s	CAP, CERAMIC 0.01MF X7R 1005
C9000	1-114-324-11	s	CAP, CERAMIC 0.022MF X7R 1608
C9001	1-114-324-11	s	CAP, CERAMIC 0.022MF X7R 1608
C9002	1-114-322-11	s	CAP, CERAMIC 4700PF X7R 1608
C9003	1-114-322-11	s	CAP, CERAMIC 4700PF X7R 1608
C9006	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C9007	1-115-414-91	s	CAP,CHIP CERAMIC 820PF CH 1608
C9008	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C9009	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C9010	1-100-831-91	s	CAP,CHIP CERAMIC 1000PF CH1608
C9011	1-100-831-91	s	CAP,CHIP CERAMIC 1000PF CH1608
C9012	1-100-831-91	s	CAP,CHIP CERAMIC 1000PF CH1608
C9013	1-100-831-91	s	CAP,CHIP CERAMIC 1000PF CH1608
C9014	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C9015	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C9016	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C9017	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C9018	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9019	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9020	1-114-331-11	s	CAP, CERAMIC 4.7MF X7R 2012
C9021	1-114-331-11	s	CAP, CERAMIC 4.7MF X7R 2012
C9022	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9023	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9024	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9025	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9026	1-114-321-11	s	CAP, CERAMIC 2200PF X7R 1608
C9027	1-114-321-11	s	CAP, CERAMIC 2200PF X7R 1608
C9028	1-114-321-11	s	CAP, CERAMIC 2200PF X7R 1608
C9029	1-114-321-11	s	CAP, CERAMIC 2200PF X7R 1608
C9030	1-114-323-11	s	CAP, CERAMIC 0.01MF X7R 1608
C9031	1-114-323-11	s	CAP, CERAMIC 0.01MF X7R 1608
C9032	1-114-323-11	s	CAP, CERAMIC 0.01MF X7R 1608
C9033	1-114-323-11	s	CAP, CERAMIC 0.01MF X7R 1608
C9034	1-116-433-11	s	CAP, AL SOLID ELECT 47MF 105
C9035	1-116-433-11	s	CAP, AL SOLID ELECT 47MF 105
C9036	1-116-108-11	s	CAP, ELECT 330MF 105
C9037	1-116-108-11	s	CAP, ELECT 330MF 105
C9038	1-112-802-11	s	CAP, ELECT 330MF

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C9038	1-112-802-11	s	CAP, ELECT 330MF
C9039	1-112-802-11	s	CAP, ELECT 330MF
C9039	1-112-802-11	s	CAP, ELECT 330MF
C9040	1-114-323-11	s	CAP, CERAMIC 0.01MF X7R 1608
C9041	1-114-323-11	s	CAP, CERAMIC 0.01MF X7R 1608
C9042	1-116-433-11	s	CAP, AL SOLID ELECT 47MF 105
C9043	1-116-433-11	s	CAP, AL SOLID ELECT 47MF 105
C9044	1-116-493-11	s	CAP, CERAMIC 4.7MF X7R 3216
C9045	1-116-493-11	s	CAP, CERAMIC 4.7MF X7R 3216
C9046	1-116-493-11	s	CAP, CERAMIC 4.7MF X7R 3216
C9047	1-116-493-11	s	CAP, CERAMIC 4.7MF X7R 3216
C9048	1-114-868-11	s	CAP, CERAMIC 0.1MF X7R 1608
C9049	1-114-331-11	s	CAP, CERAMIC 4.7MF X7R 2012
C9050	1-114-331-11	s	CAP, CERAMIC 4.7MF X7R 2012
CN1000	1-821-034-11	s	HEADER ASSEMBLY FOR PWB 51P
CN3003	1-815-597-31	s	CONNECTOR, FFC/FPC (ZIF) AN 6P
CN3200	1-819-441-11	o	PWB HEADER, 13P
CN3401	1-819-875-31	s	ETHERNET CONNECTOR (8P)
CN4001	1-784-254-21	s	CONNECTOR 10P
CN7100	1-819-331-11	o	HEADER ASSEMBLY FOR PWB 10P
CN8001	1-774-261-31	s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN8003	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN8004	1-778-645-31	s	CONNECTOR, FFC/FPC(ZIF) AN 10P
CN8005	1-774-261-31	s	CONNECTOR, FFC/FPC(ZIF) AN 24P
CN8007	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN8008	1-778-645-31	s	CONNECTOR, FFC/FPC(ZIF) AN 10P
CN8011	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN8014	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN8015	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN8016	1-779-522-31	s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN8101	1-822-598-11	s	HEADER ASSEMBLY FOR PWB 13P
D1000	1-802-245-11	s	ESD SUPPRESSOR
D1001	1-802-245-11	s	ESD SUPPRESSOR
D1002	1-802-245-11	s	ESD SUPPRESSOR
D1003	1-802-245-11	s	ESD SUPPRESSOR
D1004	1-802-245-11	s	ESD SUPPRESSOR
D1005	1-802-245-11	s	ESD SUPPRESSOR
D1006	1-802-245-11	s	ESD SUPPRESSOR
D1007	1-802-245-11	s	ESD SUPPRESSOR
D1008	1-802-245-11	s	ESD SUPPRESSOR
D1009	1-802-245-11	s	ESD SUPPRESSOR
D1010	1-802-245-11	s	ESD SUPPRESSOR
D1011	1-802-245-11	s	ESD SUPPRESSOR
D1012	1-802-245-11	s	ESD SUPPRESSOR
D1013	1-802-245-11	s	ESD SUPPRESSOR
D1014	1-802-245-11	s	ESD SUPPRESSOR
D1015	1-802-245-11	s	ESD SUPPRESSOR
D1017	1-802-245-11	s	ESD SUPPRESSOR
D1019	1-802-245-11	s	ESD SUPPRESSOR
D1021	1-802-245-11	s	ESD SUPPRESSOR
D1023	1-802-245-11	s	ESD SUPPRESSOR
D1025	1-802-245-11	s	ESD SUPPRESSOR
D1027	1-802-245-11	s	ESD SUPPRESSOR
D1028	1-802-245-11	s	ESD SUPPRESSOR
D1029	1-802-245-11	s	ESD SUPPRESSOR
D3200	8-719-070-20	s	DIODE RB706F-40
D3205	6-502-197-01	s	DI SML-D12M8WT86SM
D3400	6-500-758-01	s	DIODE RCLAMP0504M.TBT

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D3401	6-502-197-01	s	DI SML-D12M8WT86SM
D3402	6-502-196-01	s	DI SML-D12Y8WT86SP
D4000	6-502-598-01	s	DI SML-D12U8WT86
D4500	6-502-598-01	s	DI SML-D12U8WT86
D7000	6-502-197-01	s	DI SML-D12M8WT86SM
D7001	8-719-069-28	s	DI 1SS400FJTE61
D7100	6-502-197-01	s	DI SML-D12M8WT86SM
D7101	8-719-069-28	s	DI 1SS400FJTE61
D8401	6-502-598-01	s	DI SML-D12U8WT86
D8600	6-501-124-01	s	DIODE RSX101VA-30TR
D8601	6-502-197-01	s	DI SML-D12M8WT86SM
D8700	8-719-083-52	s	DI UDZSUSTE-1716B
D8702	6-500-864-01	s	DIODE RB050LA-40TR
D8703	6-502-272-01	s	DI RB055L-40TE25
D8704	8-719-076-95	s	DIODE PTZ-TE25-18B
D8705	8-719-083-70	s	DI UDZSUSTE-1727B
D9000	8-719-027-76	s	DI 1SS357
D9001	8-719-027-76	s	DI 1SS357
D9002	8-719-027-76	s	DI 1SS357
D9003	8-719-027-76	s	DI 1SS357
D9004	8-719-073-92	s	DIODE RB060L-40TE25
D9005	8-719-073-92	s	DIODE RB060L-40TE25
D9006	8-719-073-92	s	DIODE RB060L-40TE25
D9007	8-719-073-92	s	DIODE RB060L-40TE25
D9008	8-719-073-92	s	DIODE RB060L-40TE25
D9009	8-719-073-92	s	DIODE RB060L-40TE25
D9010	8-719-073-92	s	DIODE RB060L-40TE25
D9011	8-719-073-92	s	DIODE RB060L-40TE25
D9012	8-719-069-59	s	DI UDZSUSTE-178.2B
D9013	8-719-069-59	s	DI UDZSUSTE-178.2B
DR4000	1-802-245-11	s	ESD SUPPRESSOR
DR4001	1-802-245-11	s	ESD SUPPRESSOR
F7000	⚠ 1-576-958-31	s	MICRO FUSE-LINK (1608 TYPE) (4A/24V)
F7001	⚠ 1-576-415-31	s	FUSE, MICRO (1608) (2A/32V)
F7002	⚠ 1-576-844-21	s	FUSE, MICRO (1608) (2.5A/24V)
F7100	⚠ 1-576-958-31	s	MICRO FUSE-LINK (1608 TYPE) (4A/24V)
F7101	⚠ 1-576-958-31	s	MICRO FUSE-LINK (1608 TYPE) (4A/24V)
F7102	⚠ 1-523-039-11	s	FUSE (5A/32V)
F8600	⚠ 1-576-646-31	s	FUSE, MICRO (1608) (0.5A/50V)
F8602	⚠ 1-576-646-31	s	FUSE, MICRO (1608) (0.5A/50V)
F8603	⚠ 1-576-646-31	s	FUSE, MICRO (1608) (0.5A/50V)
F8604	⚠ 1-576-646-31	s	FUSE, MICRO (1608) (0.5A/50V)
F8605	⚠ 1-576-850-31	s	FUSE, MICRO (1608) (3.15A/24V)
F8606	⚠ 1-576-415-31	s	FUSE, MICRO (1608) (2A/32V)
F8607	⚠ 1-576-415-31	s	FUSE, MICRO (1608) (2A/32V)
F8700	⚠ 1-576-415-31	s	FUSE, MICRO (1608) (2A/32V)
F8701	⚠ 1-576-958-31	s	MICRO FUSE-LINK (1608 TYPE) (4A/24V)
F8702	⚠ 1-576-879-21	s	MICRO FUSE-LINK (1608 TYPE) (0.2A/36V)
F8703	⚠ 1-576-850-31	s	FUSE, MICRO (1608) (3.15A/24V)
F8704	⚠ 1-576-596-21	s	MICRO FUSE-LINK (1608 TYPE) (1A/36V)
F9000	⚠ 1-523-144-31	s	MICRO FUSE-LINKS (1608 TYPE) (5A/32V)
F9001	⚠ 1-523-144-31	s	MICRO FUSE-LINKS (1608 TYPE) (5A/32V)
F9002	⚠ 1-523-144-31	s	MICRO FUSE-LINKS (1608 TYPE) (5A/32V)
F9003	⚠ 1-523-144-31	s	MICRO FUSE-LINKS (1608 TYPE) (5A/32V)
F9004	⚠ 1-523-144-31	s	MICRO FUSE-LINKS (1608 TYPE) (5A/32V)
F9005	⚠ 1-523-144-31	s	MICRO FUSE-LINKS (1608 TYPE) (5A/32V)
F9006	⚠ 1-576-647-31	s	FUSE, MICRO (1608) (0.2A/50V)
F9007	⚠ 1-576-647-31	s	FUSE, MICRO (1608) (0.2A/50V)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB1000	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB1001	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB1002	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB1003	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1004	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2000	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2001	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2002	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2003	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2152	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2302	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2500	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2501	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2502	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2503	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2700	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB2701	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB2707	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2708	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2709	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2710	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB2711	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3002	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3003	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3006	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3012	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3100	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3101	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3102	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3103	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3104	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3200	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3201	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3202	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3203	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3204	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3205	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3206	1-400-331-21	s	FERRITE, EMI (SMD) (1005)
FB3207	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3208	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3308	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3309	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3310	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3400	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3401	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3600	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3601	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3602	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3605	1-414-445-21	s	FERRITE, EMI (SMD) (1608)
FB3800	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3801	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3802	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3803	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3804	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3805	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3806	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3807	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3808	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB3809	1-400-461-21	s	FERRITE, EMI (SMD) (1005)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB4000	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB4001	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB4003	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB4004	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB5409	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB5411	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB7000	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB7001	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB7002	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB8200	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8201	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8202	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8203	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8204	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8205	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8206	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8207	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8208	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8209	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8210	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8211	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8300	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FB8400	1-400-110-21	s	INDUCTOR, FERRITE BEAD
FB8401	1-400-110-21	s	INDUCTOR, FERRITE BEAD
FB8402	1-400-794-21	s	EMI FERRITE (SMD) (1608)
FB8403	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8404	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8500	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8501	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8502	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8503	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8600	1-400-461-21	s	FERRITE, EMI (SMD) (1005)
FL2700	1-400-648-21	s	FILTER, CHIP EMI (1606)
FL2701	1-400-648-21	s	FILTER, CHIP EMI (1606)
FL2702	1-400-648-21	s	FILTER, CHIP EMI (1606)
FL2703	1-400-648-21	s	FILTER, CHIP EMI (1606)
FL2704	1-400-648-21	s	FILTER, CHIP EMI (1606)
IC1000	8-759-689-09	s	IC SN65LVDT2DBVR
IC1001	6-717-249-01	s	IC THC63LVD1024-1LTN
IC2000	6-710-110-01	s	IC CDCE906PWR
IC2001	6-709-937-01	s	IC TC7SA34FU(T5RSONYF)
IC2003	6-704-683-01	s	IC ICS570BLFT
IC2150	6-707-373-01	s	IC TPS51100DGQR
IC2700	6-714-892-01	s	IC RP130N121D-TR-F
IC3000	6-709-250-01	s	IC PCA9516APW-118
IC3001	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3100	6-717-465-01	s	IC H57V2562GTR-75CR
IC3101	6-717-465-01	s	IC H57V2562GTR-75CR
IC3102	6-717-465-01	s	IC H57V2562GTR-75CR
IC3103	6-717-465-01	s	IC H57V2562GTR-75CR
IC3104	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC3105	6-706-482-01	s	IC TC7SH00FU
IC3107	6-717-224-11	s	IC CY2308SXC-2T
IC3109	6-709-937-01	s	IC TC7SA34FU(T5RSONYF)
IC3202	6-700-108-01	s	IC RV5C387A-E2-FB
IC3205	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC3206	6-717-340-01	s	IC FM24V02-GTR
IC3208	6-706-476-01	s	IC TC7SET04FU

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC3304	6-713-465-01	s	IC S29GL256P90TFIR20
IC3305	6-713-465-01	s	IC S29GL256P90TFIR20
IC3306	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC3400	6-712-176-01	s	IC M93C46-WDW6TP(B)
IC3401	6-712-020-01	s	IC LAN9116-MT(REV.C)
IC3600	6-708-958-01	s	IC ISP1761BE
IC3800	6-717-248-01	s	IC 74AVCH16T245DGG-118
IC3801	6-717-248-01	s	IC 74AVCH16T245DGG-118
IC3802	6-717-248-01	s	IC 74AVCH16T245DGG-118
IC3803	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC3804	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC3805	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC3806	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC4000	6-709-967-01	s	IC EPM1270GF256C5N
IC4001	6-715-647-01	s	IC PST8413UL
IC4002	6-707-879-01	s	IC TC74VHC541FT(EKJ)
IC4003	6-715-665-01	s	IC PST8436UL
IC4004	6-715-748-01	s	IC RP130N181D-TR-F
IC7000	6-714-911-01	s	IC TPS54325PWPR
IC7001	6-714-911-01	s	IC TPS54325PWPR
IC7002	6-714-345-01	s	IC EN5322QI
IC7004	8-759-656-54	s	IC TC7WH14FK
IC7100	6-714-911-01	s	IC TPS54325PWPR
IC7101	8-759-656-54	s	IC TC7WH14FK
IC7102	6-714-911-01	s	IC TPS54325PWPR
IC7103	6-715-643-01	s	IC PST8409UL
IC7104	8-759-462-09	s	IC TLV431AIDBVR
IC7105	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC7106	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC7107	8-759-338-95	s	IC NJM2903V(TE2)
IC7108	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC7109	6-716-852-01	s	IC TPS54425PWPR
IC7110	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC8200	6-717-090-01	s	IC THC63LVD104C
IC8201	6-717-090-01	s	IC THC63LVD104C
IC8202	6-717-090-01	s	IC THC63LVD104C
IC8203	6-717-090-01	s	IC THC63LVD104C
IC8400	6-707-847-01	s	IC TC74LCX157FT(EKJ)
IC8401	6-703-176-01	s	IC PST3627UL
IC8402	6-717-275-01	s	IC S25FL032P0XMFI013
IC8403	6-703-176-01	s	IC PST3627UL
IC8500	6-717-223-01	s	IC ISL24813IRTZ-T13
IC8501	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC8502	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC8600	6-711-691-01	s	IC TPS63700DRCR
IC8601	8-759-444-87	s	IC NJM324V(TE2)
IC8603	6-714-911-01	s	IC TPS54325PWPR
IC8604	6-716-852-01	s	IC TPS54425PWPR
IC8605	6-714-912-01	s	IC MAX9650ATA+TC36
IC8606	6-710-062-01	s	IC TS2431BILT
IC8700	6-702-142-01	s	IC PQ1CY1032ZP
IC8701	6-706-027-01	s	IC LTC1871EMS#TR
IC9000	6-717-523-01	s	IC LTC3857EUH#TR
IC9001	6-717-523-01	s	IC LTC3857EUH#TR
IC9002	6-714-124-01	s	IC LTC4151IDD#TR
L1000	1-456-945-22	s	COMMON MODE CHOKE COIL
L1003	1-456-945-22	s	COMMON MODE CHOKE COIL
L1004	1-456-945-22	s	COMMON MODE CHOKE COIL
L1005	1-456-945-22	s	COMMON MODE CHOKE COIL

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1006	1-456-945-22	s	COMMON MODE CHOKE COIL
L1007	1-456-945-22	s	COMMON MODE CHOKE COIL
L1008	1-456-945-22	s	COMMON MODE CHOKE COIL
L3600	1-457-223-11	s	COMMON MODE CHOKE COIL
L7000	1-457-735-11	s	CHOKE COIL 10UH
L7002	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L7100	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L7101	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L7102	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L7103	1-419-491-21	s	COIL, CHOKE 10UH
L7104	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L7105	1-457-730-11	s	CHOKE COIL 2.2UH
L8200	1-456-945-22	s	COMMON MODE CHOKE COIL
L8201	1-456-945-22	s	COMMON MODE CHOKE COIL
L8202	1-456-945-22	s	COMMON MODE CHOKE COIL
L8203	1-456-945-22	s	COMMON MODE CHOKE COIL
L8204	1-456-945-22	s	COMMON MODE CHOKE COIL
L8205	1-456-945-22	s	COMMON MODE CHOKE COIL
L8206	1-456-945-22	s	COMMON MODE CHOKE COIL
L8207	1-456-945-22	s	COMMON MODE CHOKE COIL
L8208	1-456-945-22	s	COMMON MODE CHOKE COIL
L8209	1-456-945-22	s	COMMON MODE CHOKE COIL
L8210	1-456-945-22	s	COMMON MODE CHOKE COIL
L8211	1-456-945-22	s	COMMON MODE CHOKE COIL
L8500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L8501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L8600	1-457-497-11	s	COIL, CHOKE (SMD)
L8602	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L8603	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L8604	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L8605	1-457-730-11	s	CHOKE COIL 2.2UH
L8700	1-419-524-21	s	COIL, CHOKE
L8701	1-457-497-11	s	COIL, CHOKE (SMD)
L9000	1-469-848-21	s	INDUCTOR (SMD)
L9001	1-469-848-21	s	INDUCTOR (SMD)
L9002	1-469-848-21	s	INDUCTOR (SMD)
L9003	1-469-848-21	s	INDUCTOR (SMD)
Q3100	6-552-444-01	s	TR DRC5144E0L
Q3101	6-552-444-01	s	TR DRC5144E0L
Q3200	6-552-407-01	s	TR DSA500100L
Q3201	6-552-430-01	s	TR DRC5114E0L
Q7000	6-552-444-01	s	TR DRC5144E0L
Q7001	6-552-444-01	s	TR DRC5144E0L
Q7002	6-552-444-01	s	TR DRC5144E0L
Q7005	6-552-444-01	s	TR DRC5144E0L
Q7100	6-552-444-01	s	TR DRC5144E0L
Q7101	6-552-444-01	s	TR DRC5144E0L
Q7102	6-552-444-01	s	TR DRC5144E0L
Q7103	6-552-444-01	s	TR DRC5144E0L
Q8100	6-552-430-01	s	TR DRC5114E0L
Q8400	6-552-444-01	s	TR DRC5144E0L
Q8600	8-729-025-88	s	TRANSISTOR 2SB1386-T100-R
Q8601	8-729-025-88	s	TRANSISTOR 2SB1386-T100-R
Q8602	8-729-025-88	s	TRANSISTOR 2SB1386-T100-R
Q8603	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q8604	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q8605	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q8606	6-550-978-01	s	TR RN1902

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q8607	6-550-978-01	s	TR RN1902
Q8608	6-550-978-01	s	TR RN1902
Q8609	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q8610	8-729-025-88	s	TRANSISTOR 2SB1386-T100-R
Q8701	6-550-978-01	s	TR RN1902
Q8702	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q8703	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q8704	6-552-444-01	s	TR DRC5144E0L
Q8705	6-550-978-01	s	TR RN1902
Q9000	6-550-978-01	s	TR RN1902
Q9001	6-550-978-01	s	TR RN1902
Q9002	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9003	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9004	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9005	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9006	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9007	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9008	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q9009	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
R1000	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1001	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1002	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1003	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1004	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1005	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1006	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1007	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1008	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1009	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1010	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1011	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1012	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1013	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1014	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1015	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1016	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1017	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1018	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R1019	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1020	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1021	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1027	1-218-977-81	s	RES, CHIP 100K
R1028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1031	1-218-933-81	s	RES, CHIP 22
R1032	1-218-933-81	s	RES, CHIP 22
R1033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1039	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1040	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1041	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1042	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1043	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1044	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1045	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1046	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1047	1-242-967-81	s	RES, CHIP 1.0 (1005)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1048	1-218-933-81	s	RES, CHIP 22
R1049	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1050	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1051	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2000	1-218-933-81	s	RES, CHIP 22
R2002	1-218-933-81	s	RES, CHIP 22
R2003	1-218-933-81	s	RES, CHIP 22
R2004	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2005	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2006	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2007	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2010	1-218-929-81	s	RES, CHIP 10
R2011	1-218-929-81	s	RES, CHIP 10
R2012	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2013	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2014	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2015	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2016	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2017	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2018	1-218-933-81	s	RES, CHIP 22
R2019	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2022	1-218-935-81	s	RES, CHIP 33
R2023	1-218-935-81	s	RES, CHIP 33
R2024	1-218-935-81	s	RES, CHIP 33
R2025	1-218-935-81	s	RES, CHIP 33
R2026	1-218-935-81	s	RES, CHIP 33
R2027	1-218-933-81	s	RES, CHIP 22
R2028	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2029	1-242-967-81	s	RES, CHIP 1.0 (1005)
R2030	1-218-929-81	s	RES, CHIP 10
R2031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-218-933-81	s	RES, CHIP 22
R2041	1-218-953-81	s	RES, CHIP 1.0K
R2042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2045	1-218-937-81	s	RES, CHIP 47
R2046	1-218-937-81	s	RES, CHIP 47
R2048	1-218-937-81	s	RES, CHIP 47
R2050	1-218-937-81	s	RES, CHIP 47
R2053	1-218-933-81	s	RES, CHIP 22
R2054	1-218-933-81	s	RES, CHIP 22
R2055	1-218-937-81	s	RES, CHIP 47
R2150	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2152	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2153	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2154	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2155	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2156	1-208-859-81	s	RES, CHIP 68
R2157	1-208-859-81	s	RES, CHIP 68
R2158	1-218-941-81	s	RES, CHIP 100
R2161	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2162	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2163	1-218-941-81	s	RES, CHIP 100
R2300	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2301	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2302	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2303	1-250-464-11	s	RES, METAL FILM CHIP 51 (1005)
R2304	1-208-859-81	s	RES, CHIP 68
R2305	1-208-859-81	s	RES, CHIP 68
R2306	1-218-933-81	s	RES, CHIP 22
R2307	1-218-941-81	s	RES, CHIP 100
R2308	1-218-953-81	s	RES, CHIP 1.0K
R2312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2314	1-218-941-81	s	RES, CHIP 100
R2600	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3000	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3001	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3002	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3003	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3004	1-218-965-81	s	RES, CHIP 10K 1005
R3006	1-218-929-81	s	RES, CHIP 10
R3007	1-218-929-81	s	RES, CHIP 10
R3008	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3009	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3010	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3011	1-216-829-91	s	RES, CHIP 4.7K (1608)
R3012	1-218-945-81	s	RES, CHIP 220
R3013	1-218-945-81	s	RES, CHIP 220
R3014	1-218-945-81	s	RES, CHIP 220
R3015	1-218-945-81	s	RES, CHIP 220
R3027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3035	1-218-953-81	s	RES, CHIP 1.0K
R3036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3101	1-218-965-81	s	RES, CHIP 10K 1005
R3103	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3104	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3107	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3109	1-218-965-81	s	RES, CHIP 10K 1005
R3111	1-218-965-81	s	RES, CHIP 10K 1005
R3112	1-218-929-81	s	RES, CHIP 10
R3113	1-218-935-81	s	RES, CHIP 33
R3114	1-218-935-81	s	RES, CHIP 33
R3115	1-218-929-81	s	RES, CHIP 10
R3116	1-218-961-81	s	RES, CHIP 4.7K
R3117	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3118	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3119	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3152	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3153	1-218-935-81	s	RES, CHIP 33
R3154	1-218-935-81	s	RES, CHIP 33
R3155	1-218-935-81	s	RES, CHIP 33
R3156	1-218-935-81	s	RES, CHIP 33

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3157	1-218-935-81	s	RES, CHIP 33
R3158	1-218-929-81	s	RES, CHIP 10
R3159	1-218-937-81	s	RES, CHIP 47
R3163	1-218-937-81	s	RES, CHIP 47
R3164	1-218-933-81	s	RES, CHIP 22
R3166	1-218-937-81	s	RES, CHIP 47
R3167	1-218-933-81	s	RES, CHIP 22
R3168	1-218-933-81	s	RES, CHIP 22
R3197	1-218-937-81	s	RES, CHIP 47
R3198	1-218-937-81	s	RES, CHIP 47
R3205	1-218-937-81	s	RES, CHIP 47
R3206	1-250-463-11	s	RES, METAL FILM CHIP 47 (1005)
R3207	1-218-965-81	s	RES, CHIP 10K 1005
R3208	1-218-965-81	s	RES, CHIP 10K 1005
R3209	1-216-809-91	s	RES, CHIP 100 (1608)
R3210	1-216-809-91	s	RES, CHIP 100 (1608)
R3211	1-216-809-91	s	RES, CHIP 100 (1608)
R3212	1-216-809-91	s	RES, CHIP 100 (1608)
R3213	1-218-929-81	s	RES, CHIP 10
R3214	1-218-929-81	s	RES, CHIP 10
R3215	1-218-957-81	s	RES, CHIP 2.2K
R3216	1-218-929-81	s	RES, CHIP 10
R3217	1-218-957-81	s	RES, CHIP 2.2K
R3218	1-218-965-81	s	RES, CHIP 10K 1005
R3219	1-218-965-81	s	RES, CHIP 10K 1005
R3221	1-218-965-81	s	RES, CHIP 10K 1005
R3223	1-218-965-81	s	RES, CHIP 10K 1005
R3225	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3230	1-216-833-91	s	RES, CHIP 10K (1608)
R3231	1-218-965-81	s	RES, CHIP 10K 1005
R3232	1-218-965-81	s	RES, CHIP 10K 1005
R3233	1-218-937-81	s	RES, CHIP 47
R3234	1-218-937-81	s	RES, CHIP 47
R3235	1-218-937-81	s	RES, CHIP 47
R3236	1-218-965-81	s	RES, CHIP 10K 1005
R3237	1-218-965-81	s	RES, CHIP 10K 1005
R3238	1-218-965-81	s	RES, CHIP 10K 1005
R3239	1-218-957-81	s	RES, CHIP 2.2K
R3240	1-218-937-81	s	RES, CHIP 47
R3241	1-218-937-81	s	RES, CHIP 47
R3242	1-218-937-81	s	RES, CHIP 47
R3243	1-218-937-81	s	RES, CHIP 47
R3244	1-218-941-81	s	RES, CHIP 100
R3245	1-218-941-81	s	RES, CHIP 100
R3246	1-218-941-81	s	RES, CHIP 100
R3247	1-218-941-81	s	RES, CHIP 100
R3248	1-218-941-81	s	RES, CHIP 100
R3249	1-218-953-81	s	RES, CHIP 1.0K
R3250	1-218-953-81	s	RES, CHIP 1.0K
R3251	1-218-965-81	s	RES, CHIP 10K 1005
R3252	1-218-933-81	s	RES, CHIP 22
R3253	1-218-937-81	s	RES, CHIP 47
R3254	1-218-937-81	s	RES, CHIP 47
R3255	1-218-937-81	s	RES, CHIP 47
R3258	1-218-937-81	s	RES, CHIP 47
R3316	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3317	1-218-965-81	s	RES, CHIP 10K 1005
R3318	1-218-965-81	s	RES, CHIP 10K 1005
R3319	1-218-965-81	s	RES, CHIP 10K 1005

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3320	1-218-965-81	s	RES, CHIP 10K 1005
R3321	1-218-965-81	s	RES, CHIP 10K 1005
R3322	1-216-833-91	s	RES, CHIP 10K (1608)
R3323	1-216-833-91	s	RES, CHIP 10K (1608)
R3324	1-218-933-81	s	RES, CHIP 22
R3325	1-208-859-81	s	RES, CHIP 68
R3326	1-218-965-81	s	RES, CHIP 10K 1005
R3327	1-218-965-81	s	RES, CHIP 10K 1005
R3328	1-218-965-81	s	RES, CHIP 10K 1005
R3401	1-218-953-81	s	RES, CHIP 1.0K
R3402	1-218-977-81	s	RES, CHIP 100K
R3403	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3405	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3406	1-218-989-81	s	RES, CHIP 1M
R3407	1-218-965-81	s	RES, CHIP 10K 1005
R3408	1-218-937-81	s	RES, CHIP 47
R3409	1-218-941-81	s	RES, CHIP 100
R3410	1-218-875-91	s	RES, CHIP 15K (1608)
R3411	1-218-893-91	s	RES, CHIP 82K (1608)
R3412	1-218-913-91	s	RES, CHIP 560K (1608)
R3413	1-216-821-91	s	RES, CHIP 1.0K (1608)
R3414	1-218-965-81	s	RES, CHIP 10K 1005
R3415	1-216-833-91	s	RES, CHIP 10K (1608)
R3416	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3417	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3418	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3419	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3420	1-218-929-81	s	RES, CHIP 10
R3421	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3422	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3423	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3424	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R3425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3435	1-218-953-81	s	RES, CHIP 1.0K
R3437	1-218-953-81	s	RES, CHIP 1.0K
R3600	1-208-859-81	s	RES, CHIP 68
R3601	1-218-929-81	s	RES, CHIP 10
R3602	1-208-859-81	s	RES, CHIP 68
R3603	1-218-937-81	s	RES, CHIP 47
R3604	1-218-965-81	s	RES, CHIP 10K 1005
R3605	1-218-965-81	s	RES, CHIP 10K 1005
R3606	1-218-965-81	s	RES, CHIP 10K 1005
R3607	1-216-833-91	s	RES, CHIP 10K (1608)
R3608	1-216-833-91	s	RES, CHIP 10K (1608)
R3609	1-216-833-91	s	RES, CHIP 10K (1608)
R3610	1-216-833-91	s	RES, CHIP 10K (1608)
R3611	1-218-965-81	s	RES, CHIP 10K 1005
R3612	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3613	1-216-833-91	s	RES, CHIP 10K (1608)
R3617	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3618	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3619	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3620	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R3627	1-216-833-91	s	RES, CHIP 10K (1608)
R3701	1-218-929-81	s	RES, CHIP 10
R3800	1-218-941-81	s	RES, CHIP 100

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3801	1-218-941-81	s	RES, CHIP 100
R3802	1-218-937-81	s	RES, CHIP 47
R3803	1-218-941-81	s	RES, CHIP 100
R3804	1-216-833-91	s	RES, CHIP 10K (1608)
R3805	1-216-833-91	s	RES, CHIP 10K (1608)
R3806	1-218-941-81	s	RES, CHIP 100
R3807	1-216-833-91	s	RES, CHIP 10K (1608)
R3808	1-218-941-81	s	RES, CHIP 100
R3809	1-216-833-91	s	RES, CHIP 10K (1608)
R3810	1-218-933-81	s	RES, CHIP 22
R3811	1-218-933-81	s	RES, CHIP 22
R3812	1-218-933-81	s	RES, CHIP 22
R3813	1-218-933-81	s	RES, CHIP 22
R3814	1-218-965-81	s	RES, CHIP 10K 1005
R3815	1-218-941-81	s	RES, CHIP 100
R3816	1-218-941-81	s	RES, CHIP 100
R3817	1-218-965-81	s	RES, CHIP 10K 1005
R3818	1-218-937-81	s	RES, CHIP 47
R3819	1-218-941-81	s	RES, CHIP 100
R3820	1-218-965-81	s	RES, CHIP 10K 1005
R3821	1-218-941-81	s	RES, CHIP 100
R3822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3823	1-218-941-81	s	RES, CHIP 100
R3824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3827	1-218-965-81	s	RES, CHIP 10K 1005
R3828	1-218-935-81	s	RES, CHIP 33
R3829	1-218-965-81	s	RES, CHIP 10K 1005
R3830	1-218-965-81	s	RES, CHIP 10K 1005
R3831	1-218-965-81	s	RES, CHIP 10K 1005
R3832	1-218-935-81	s	RES, CHIP 33
R3833	1-218-935-81	s	RES, CHIP 33
R4000	1-218-953-81	s	RES, CHIP 1.0K
R4001	1-218-929-81	s	RES, CHIP 10
R4002	1-218-965-81	s	RES, CHIP 10K 1005
R4003	1-218-933-81	s	RES, CHIP 22
R4004	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4005	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4006	1-218-933-81	s	RES, CHIP 22
R4007	1-218-937-81	s	RES, CHIP 47
R4008	1-218-933-81	s	RES, CHIP 22
R4010	1-218-933-81	s	RES, CHIP 22
R4011	1-218-933-81	s	RES, CHIP 22
R4012	1-218-929-81	s	RES, CHIP 10
R4013	1-218-933-81	s	RES, CHIP 22
R4014	1-218-933-81	s	RES, CHIP 22
R4015	1-218-933-81	s	RES, CHIP 22
R4016	1-218-933-81	s	RES, CHIP 22
R4017	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4018	1-218-937-81	s	RES, CHIP 47
R4023	1-218-937-81	s	RES, CHIP 47
R4024	1-218-937-81	s	RES, CHIP 47
R4025	1-218-937-81	s	RES, CHIP 47
R4026	1-218-941-81	s	RES, CHIP 100
R4027	1-218-965-81	s	RES, CHIP 10K 1005
R4028	1-218-969-81	s	RES, CHIP 22K
R4029	1-218-965-81	s	RES, CHIP 10K 1005
R4030	1-218-941-81	s	RES, CHIP 100

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4031	1-218-965-81	s	RES, CHIP 10K 1005
R4032	1-218-965-81	s	RES, CHIP 10K 1005
R4033	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4034	1-218-965-81	s	RES, CHIP 10K 1005
R4035	1-218-941-81	s	RES, CHIP 100
R4036	1-218-941-81	s	RES, CHIP 100
R4037	1-218-965-81	s	RES, CHIP 10K 1005
R4038	1-218-941-81	s	RES, CHIP 100
R4039	1-218-965-81	s	RES, CHIP 10K 1005
R4041	1-218-953-81	s	RES, CHIP 1.0K
R4042	1-218-957-81	s	RES, CHIP 2.2K
R4044	1-218-953-81	s	RES, CHIP 1.0K
R4045	1-218-965-81	s	RES, CHIP 10K 1005
R4046	1-218-965-81	s	RES, CHIP 10K 1005
R4047	1-218-965-81	s	RES, CHIP 10K 1005
R4048	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4049	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4050	1-218-941-81	s	RES, CHIP 100
R4051	1-218-941-81	s	RES, CHIP 100
R4052	1-218-941-81	s	RES, CHIP 100
R4053	1-218-941-81	s	RES, CHIP 100
R4054	1-218-941-81	s	RES, CHIP 100
R4055	1-218-941-81	s	RES, CHIP 100
R4056	1-218-933-81	s	RES, CHIP 22
R4057	1-218-929-81	s	RES, CHIP 10
R4058	1-218-965-81	s	RES, CHIP 10K 1005
R4059	1-218-965-81	s	RES, CHIP 10K 1005
R4061	1-218-965-81	s	RES, CHIP 10K 1005
R4062	1-218-965-81	s	RES, CHIP 10K 1005
R4066	1-218-965-81	s	RES, CHIP 10K 1005
R4067	1-218-965-81	s	RES, CHIP 10K 1005
R4068	1-218-961-81	s	RES, CHIP 4.7K
R4069	1-218-933-81	s	RES, CHIP 22
R4071	1-218-941-81	s	RES, CHIP 100
R4072	1-218-941-81	s	RES, CHIP 100
R4073	1-218-965-81	s	RES, CHIP 10K 1005
R4074	1-218-937-81	s	RES, CHIP 47
R4078	1-218-941-81	s	RES, CHIP 100
R4079	1-218-941-81	s	RES, CHIP 100
R4080	1-218-965-81	s	RES, CHIP 10K 1005
R4081	1-218-937-81	s	RES, CHIP 47
R4082	1-218-937-81	s	RES, CHIP 47
R4083	1-216-833-91	s	RES, CHIP 10K (1608)
R4084	1-218-929-81	s	RES, CHIP 10
R4085	1-218-929-81	s	RES, CHIP 10
R4086	1-218-929-81	s	RES, CHIP 10
R4087	1-218-929-81	s	RES, CHIP 10
R4088	1-218-929-81	s	RES, CHIP 10
R4089	1-218-929-81	s	RES, CHIP 10
R4090	1-218-965-81	s	RES, CHIP 10K 1005
R4092	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R4094	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4095	1-218-937-81	s	RES, CHIP 47
R4096	1-218-937-81	s	RES, CHIP 47
R4097	1-218-937-81	s	RES, CHIP 47
R4098	1-218-937-81	s	RES, CHIP 47
R4099	1-218-937-81	s	RES, CHIP 47
R4100	1-218-937-81	s	RES, CHIP 47
R4101	1-218-937-81	s	RES, CHIP 47

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4102	1-218-937-81	s	RES, CHIP 47
R4103	1-218-937-81	s	RES, CHIP 47
R4104	1-218-937-81	s	RES, CHIP 47
R4105	1-218-937-81	s	RES, CHIP 47
R4107	1-218-937-81	s	RES, CHIP 47
R4108	1-218-937-81	s	RES, CHIP 47
R4109	1-218-937-81	s	RES, CHIP 47
R4110	1-218-937-81	s	RES, CHIP 47
R4111	1-218-937-81	s	RES, CHIP 47
R4112	1-218-937-81	s	RES, CHIP 47
R4114	1-218-937-81	s	RES, CHIP 47
R4117	1-218-937-81	s	RES, CHIP 47
R4118	1-218-937-81	s	RES, CHIP 47
R4119	1-218-937-81	s	RES, CHIP 47
R4120	1-218-937-81	s	RES, CHIP 47
R4121	1-218-937-81	s	RES, CHIP 47
R4122	1-218-937-81	s	RES, CHIP 47
R4123	1-218-937-81	s	RES, CHIP 47
R4125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4126	1-218-937-81	s	RES, CHIP 47
R4127	1-218-937-81	s	RES, CHIP 47
R4128	1-218-937-81	s	RES, CHIP 47
R4517	1-218-957-81	s	RES, CHIP 2.2K
R4522	1-216-833-91	s	RES, CHIP 10K (1608)
R4523	1-218-929-81	s	RES, CHIP 10
R4524	1-218-929-81	s	RES, CHIP 10
R4525	1-216-833-91	s	RES, CHIP 10K (1608)
R4526	1-216-833-91	s	RES, CHIP 10K (1608)
R5201	1-218-937-81	s	RES, CHIP 47
R5242	1-216-833-91	s	RES, CHIP 10K (1608)
R5271	1-218-965-81	s	RES, CHIP 10K 1005
R6006	1-218-965-81	s	RES, CHIP 10K 1005
R6015	1-218-965-81	s	RES, CHIP 10K 1005
R6212	1-218-941-81	s	RES, CHIP 100
R6213	1-218-941-81	s	RES, CHIP 100
R6214	1-218-941-81	s	RES, CHIP 100
R6216	1-218-965-81	s	RES, CHIP 10K 1005
R6217	1-218-965-81	s	RES, CHIP 10K 1005
R6218	1-218-965-81	s	RES, CHIP 10K 1005
R7000	1-218-965-81	s	RES, CHIP 10K 1005
R7001	1-218-965-81	s	RES, CHIP 10K 1005
R7002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7003	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R7004	1-250-526-11	o	RES, METAL FILM CHIP 20K(1005)
R7005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7006	1-250-539-11	o	RES, METAL FILM CHIP 68K(1005)
R7007	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R7009	1-218-965-81	s	RES, CHIP 10K 1005
R7010	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7011	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7013	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7016	1-218-977-81	s	RES, CHIP 100K
R7017	1-218-957-81	s	RES, CHIP 2.2K
R7018	1-218-949-81	s	RES, CHIP 470
R7019	1-218-981-81	s	RES, CHIP 220K
R7020	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7021	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7022	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7029	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7030	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7100	1-218-965-81	s	RES, CHIP 10K 1005
R7101	1-250-539-11	o	RES, METAL FILM CHIP 68K(1005)
R7102	1-250-511-11	o	RES,METAL FILM CHIP 4.7K(1005)
R7103	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R7104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7106	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7108	1-218-977-81	s	RES, CHIP 100K
R7109	1-218-957-81	s	RES, CHIP 2.2K
R7110	1-218-949-81	s	RES, CHIP 470
R7111	1-218-981-81	s	RES, CHIP 220K
R7112	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7113	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7114	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7115	1-218-965-81	s	RES, CHIP 10K 1005
R7116	1-218-970-11	s	RES, CHIP 27K (1005)
R7117	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7118	1-208-715-11	s	RES, CHIP 22K (1005)
R7119	1-218-965-81	s	RES, CHIP 10K 1005
R7120	1-218-951-81	s	RES, CHIP 680
R7121	1-218-961-81	s	RES, CHIP 4.7K
R7124	1-218-965-81	s	RES, CHIP 10K 1005
R7125	1-218-981-81	s	RES, CHIP 220K
R7126	1-218-987-81	s	RES, CHIP 680K
R7131	1-250-507-11	o	RES,METAL FILM CHIP 3.3K(1005)
R7132	1-250-519-11	s	RES, METAL FILM CHIP 10K(1005)
R7133	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R7136	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7137	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R7138	1-218-977-81	s	RES, CHIP 100K
R7139	1-218-937-81	s	RES, CHIP 47
R7142	1-218-937-81	s	RES, CHIP 47
R8000	1-218-989-81	s	RES, CHIP 1M
R8001	1-218-989-81	s	RES, CHIP 1M
R8002	1-218-989-81	s	RES, CHIP 1M
R8003	1-218-989-81	s	RES, CHIP 1M
R8100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8101	1-218-977-81	s	RES, CHIP 100K
R8102	1-218-989-81	s	RES, CHIP 1M
R8103	1-218-989-81	s	RES, CHIP 1M
R8104	1-218-989-81	s	RES, CHIP 1M
R8105	1-218-989-81	s	RES, CHIP 1M
R8106	1-218-989-81	s	RES, CHIP 1M
R8107	1-218-989-81	s	RES, CHIP 1M
R8108	1-218-989-81	s	RES, CHIP 1M
R8109	1-218-989-81	s	RES, CHIP 1M
R8110	1-218-965-81	s	RES, CHIP 10K 1005
R8111	1-218-989-81	s	RES, CHIP 1M
R8112	1-218-989-81	s	RES, CHIP 1M
R8113	1-218-989-81	s	RES, CHIP 1M
R8114	1-218-989-81	s	RES, CHIP 1M
R8200	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8201	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8202	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8203	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8204	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8205	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8206	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8207	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8208	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8209	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8210	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8211	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8212	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8213	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8214	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8215	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8216	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8217	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8218	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8219	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8220	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8221	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8222	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8223	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8224	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8225	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8226	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8227	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8228	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8229	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8234	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8245	1-218-933-81	s	RES, CHIP 22
R8248	1-218-933-81	s	RES, CHIP 22
R8250	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8251	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8252	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8253	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8254	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8255	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8256	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8257	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8258	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8259	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8260	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8261	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8262	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8263	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8264	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8265	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R8266	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8267	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8268	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8269	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8270	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8271	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8272	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8273	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8274	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8275	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8276	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8277	1-242-967-81	s	RES, CHIP 1.0 (1005)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8278	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8279	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8295	1-218-933-81	s	RES, CHIP 22
R8298	1-218-933-81	s	RES, CHIP 22
R8300	1-218-933-81	s	RES, CHIP 22
R8301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8304	1-218-961-81	s	RES, CHIP 4.7K
R8305	1-218-933-81	s	RES, CHIP 22
R8306	1-218-933-81	s	RES, CHIP 22
R8307	1-218-933-81	s	RES, CHIP 22
R8308	1-218-933-81	s	RES, CHIP 22
R8309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8312	1-218-953-81	s	RES, CHIP 1.0K
R8314	1-218-961-81	s	RES, CHIP 4.7K
R8316	1-218-961-81	s	RES, CHIP 4.7K
R8401	1-218-933-81	s	RES, CHIP 22
R8402	1-218-933-81	s	RES, CHIP 22
R8404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8406	1-218-933-81	s	RES, CHIP 22
R8407	1-218-933-81	s	RES, CHIP 22
R8408	1-218-965-81	s	RES, CHIP 10K 1005
R8409	1-218-933-81	s	RES, CHIP 22
R8411	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8413	1-218-937-81	s	RES, CHIP 47
R8414	1-218-937-81	s	RES, CHIP 47
R8415	1-218-937-81	s	RES, CHIP 47
R8416	1-218-933-81	s	RES, CHIP 22
R8417	1-218-965-81	s	RES, CHIP 10K 1005
R8418	1-218-965-81	s	RES, CHIP 10K 1005
R8424	1-218-965-81	s	RES, CHIP 10K 1005
R8429	1-218-965-81	s	RES, CHIP 10K 1005
R8430	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R8431	1-218-937-81	s	RES, CHIP 47
R8432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8434	1-218-961-81	s	RES, CHIP 4.7K
R8435	1-218-957-81	s	RES, CHIP 2.2K
R8436	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8437	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8438	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8439	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8440	1-218-965-81	s	RES, CHIP 10K 1005
R8441	1-218-933-81	s	RES, CHIP 22
R8442	1-218-933-81	s	RES, CHIP 22
R8443	1-218-965-81	s	RES, CHIP 10K 1005
R8444	1-218-933-81	s	RES, CHIP 22
R8445	1-218-933-81	s	RES, CHIP 22

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8447	1-218-933-81	s	RES, CHIP 22
R8448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8449	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8500	1-250-646-11	s	RES, METAL FILM CHIP 18K(1608)
R8501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8510	1-250-662-11	s	RES, METAL FILM CHIP 82K(1608)
R8512	1-218-929-81	s	RES, CHIP 10
R8513	1-218-929-81	s	RES, CHIP 10
R8516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8527	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8530	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8531	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8532	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8533	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8535	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8536	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8537	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8538	1-242-967-81	s	RES, CHIP 1.0 (1005)
R8539	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8540	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8544	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8547	1-250-628-11	s	RES,METAL FILM CHIP 3.3K(1608)
R8548	1-250-632-11	s	RES,METAL FILM CHIP 4.7K(1608)
R8549	1-250-652-11	s	RES, METAL FILM CHIP 33K(1608)
R8600	1-218-929-81	s	RES, CHIP 10
R8601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8602	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8603	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8604	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8606	1-250-545-11	o	RES,METAL FILM CHIP 120K(1005)
R8608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8609	1-218-961-81	s	RES, CHIP 4.7K
R8610	1-218-961-81	s	RES, CHIP 4.7K
R8611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8612	1-218-961-81	s	RES, CHIP 4.7K
R8613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8614	1-218-961-81	s	RES, CHIP 4.7K
R8616	1-250-545-11	o	RES,METAL FILM CHIP 120K(1005)
R8617	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8618	1-250-561-11	o	RES,METAL FILM CHIP 560K(1005)
R8619	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8620	1-250-547-11	s	RES,METAL FILM CHIP 150K(1005)
R8622	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8623	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8626	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8627	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R8628	1-218-941-81	s	RES, CHIP 100
R8629	1-218-941-81	s	RES, CHIP 100
R8630	1-218-941-81	s	RES, CHIP 100
R8632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8633	1-218-961-81	s	RES, CHIP 4.7K
R8634	1-250-519-11	s	RES, METAL FILM CHIP 10K(1005)
R8635	1-250-523-11	o	RES, METAL FILM CHIP 15K(1005)
R8636	1-218-949-81	s	RES, CHIP 470
R8638	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8639	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8640	1-218-965-81	s	RES, CHIP 10K 1005
R8641	1-208-931-81	s	RES, CHIP 68K (1005)
R8642	1-250-511-11	o	RES,METAL FILM CHIP 4.7K(1005)
R8643	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R8648	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8649	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8652	1-250-507-11	o	RES,METAL FILM CHIP 3.3K(1005)
R8653	1-250-519-11	s	RES, METAL FILM CHIP 10K(1005)
R8654	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R8655	1-218-965-81	s	RES, CHIP 10K 1005
R8656	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8657	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8658	1-218-957-81	s	RES, CHIP 2.2K
R8700	1-250-523-11	o	RES, METAL FILM CHIP 15K(1005)
R8701	1-250-529-11	o	RES, METAL FILM CHIP 27K(1005)
R8702	1-218-977-81	s	RES, CHIP 100K
R8704	1-250-503-11	o	RES,METAL FILM CHIP 2.2K(1005)
R8705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8706	1-218-326-91	s	RES,SQUARE TYPE CHIP 470(4532)
R8707	1-219-610-21	s	RES, CHIP (SQUARE TYPE) 0.022
R8710	1-250-519-11	s	RES, METAL FILM CHIP 10K(1005)
R8711	1-250-549-11	o	RES,METAL FILM CHIP 180K(1005)
R8712	1-250-503-11	o	RES,METAL FILM CHIP 2.2K(1005)
R8713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8714	1-218-961-81	s	RES, CHIP 4.7K
R8715	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8716	1-218-977-81	s	RES, CHIP 100K
R8717	1-218-961-81	s	RES, CHIP 4.7K
R8718	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8719	1-218-961-81	s	RES, CHIP 4.7K
R8720	1-218-961-81	s	RES, CHIP 4.7K
R8721	1-218-973-81	s	RES, CHIP 47K
R8722	1-218-983-81	s	RES, CHIP 330K
R9000	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9001	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9002	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9003	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9004	1-216-834-91	s	RES, CHIP 12K (1608)
R9005	1-216-834-91	s	RES, CHIP 12K (1608)
R9006	1-216-837-91	s	RES, CHIP 22K (1608)
R9007	1-216-841-91	s	RES, CHIP 47K (1608)
R9008	1-216-837-91	s	RES, CHIP 22K (1608)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9009	1-216-841-91	s	RES, CHIP 47K (1608)
R9010	1-216-845-91	s	RES, CHIP 100K (1608)
R9011	1-216-839-91	s	RES, CHIP 33K (1608)
R9012	1-216-845-91	s	RES, CHIP 100K (1608)
R9013	1-216-839-91	s	RES, CHIP 33K (1608)
R9014	1-250-654-11	s	RES, METAL FILM CHIP 39K(1608)
R9015	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9016	1-250-644-11	s	RES, METAL FILM CHIP 15K(1608)
R9017	1-250-638-11	s	RES,METAL FILM CHIP 8.2K(1608)
R9018	1-250-618-11	s	RES,METAL FILM CHIP 1.2K(1608)
R9019	1-250-626-11	s	RES,METAL FILM CHIP 2.7K(1608)
R9020	1-250-654-11	s	RES, METAL FILM CHIP 39K(1608)
R9021	1-250-652-11	s	RES, METAL FILM CHIP 33K(1608)
R9022	1-250-624-11	s	RES,METAL FILM CHIP 2.2K(1608)
R9023	1-216-833-91	s	RES, CHIP 10K (1608)
R9024	1-216-836-91	s	RES, CHIP 18K (1608)
R9025	1-216-833-91	s	RES, CHIP 10K (1608)
R9026	1-216-836-91	s	RES, CHIP 18K (1608)
R9027	1-250-602-11	s	RES, METAL FILM CHIP 270(1608)
R9028	1-250-642-11	s	RES, METAL FILM CHIP 12K(1608)
R9030	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9032	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9033	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9034	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9035	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9036	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9037	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9038	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9039	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9040	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9041	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9047	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9048	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9049	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9050	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9051	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9052	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9053	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9054	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9055	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9056	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9057	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9058	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9059	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9060	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9061	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9062	1-216-789-91	s	RES, CHIP 2.2 (1608)
R9063	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9064	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9065	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9066	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9067	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9068	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9069	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9070	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9071	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9072	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9074	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9077	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9078	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9079	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9081	1-250-263-11	s	RES, METAL FILM CHIP 10MM 1632
R9082	1-216-827-91	s	RES, CHIP 3.3K (1608)
R9083	1-216-827-91	s	RES, CHIP 3.3K (1608)
R9084	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9086	1-216-833-91	s	RES, CHIP 10K (1608)
R9087	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9089	1-216-833-91	s	RES, CHIP 10K (1608)
R9090	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9091	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R9095	1-216-864-91	s	CONDUCTOR, CHIP (1608)
RB2000	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2006	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2007	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2008	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2009	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2010	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2011	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2012	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2020	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2021	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2022	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB2023	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB2024	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB2025	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB2031	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2032	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2033	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2034	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2035	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2036	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2037	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2038	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2039	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2040	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2150	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2151	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2152	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2153	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2154	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2300	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2301	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2302	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2303	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB2304	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3101	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3110	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3329	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3330	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3331	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3332	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3333	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3334	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3335	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3336	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3337	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3338	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3339	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3340	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3341	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3342	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3343	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3344	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3345	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3346	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3347	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3348	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3400	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3401	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3402	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3403	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3404	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3405	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3406	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3407	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3408	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3600	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3601	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3602	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3603	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB3604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3608	1-200-051-21	s	RES, NETWORK 150 (1005X4)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3609	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3610	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3611	1-200-051-21	s	RES, NETWORK 150 (1005X4)
RB3800	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3803	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3808	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3809	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3810	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3813	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3814	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3815	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3816	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3817	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3818	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3819	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3820	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3821	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3822	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3823	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3824	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3825	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3826	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3827	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3828	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3829	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3830	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3831	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3832	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3833	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3834	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3835	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3836	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3837	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3838	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3839	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3840	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3841	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3842	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3843	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB3844	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB3845	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB3846	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB3847	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB3848	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3849	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3850	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3851	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4000	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4001	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4002	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4003	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4006	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB4007	1-242-963-21	s	RES, NETWORK 33 (1005X4)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB4008	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB4009	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB8200	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8201	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8213	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8214	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8215	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8216	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8217	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8223	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8224	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8225	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8228	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8229	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8230	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8231	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8232	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8233	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8234	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8235	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8236	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8237	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8238	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8239	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8408	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8409	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB8500	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8504	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB8506	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(BC BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB8507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S3100	1-692-270-41	s	SWITCH, SLIDE
S4000	1-771-721-21	s	SWITCH, TACTILE
S8400	1-771-721-21	s	SWITCH, TACTILE
S8401	1-692-270-41	s	SWITCH, SLIDE
S8402	1-771-721-21	s	SWITCH, TACTILE
TP7000	1-535-877-22	s	CHIP, CHECKER
TP7001	1-535-877-22	s	CHIP, CHECKER
TP7002	1-535-877-22	s	CHIP, CHECKER
TP7003	1-535-877-22	s	CHIP, CHECKER
TP7004	1-535-877-22	s	CHIP, CHECKER
TP7005	1-535-877-22	s	CHIP, CHECKER
TP7006	1-535-877-22	s	CHIP, CHECKER
TP7007	1-535-877-22	s	CHIP, CHECKER
TP7100	1-535-877-22	s	CHIP, CHECKER
TP7101	1-535-877-22	s	CHIP, CHECKER
TP7102	1-535-877-22	s	CHIP, CHECKER
TP7103	1-535-877-22	s	CHIP, CHECKER
TP8000	1-535-877-22	s	CHIP, CHECKER
TP8001	1-535-877-22	s	CHIP, CHECKER
TP8100	1-535-877-22	s	CHIP, CHECKER
TP8101	1-535-877-22	s	CHIP, CHECKER
TP9000	1-535-757-21	s	CHIP, CHECKER
TP9001	1-535-757-21	s	CHIP, CHECKER
TP9002	1-535-757-21	s	CHIP, CHECKER
TP9003	1-535-757-21	s	CHIP, CHECKER
TP9004	1-535-757-21	s	CHIP, CHECKER
TP9005	1-535-757-21	s	CHIP, CHECKER
X2000	1-814-163-11	s	XTAL OSCILLATOR (56MHZ)
X2300	1-814-146-11	s	OSCILLATOR, CRYSTAL (50.0MHZ)
X3101	1-781-696-21	s	VIBRATOR, CRYSTAL (32.768 KHz)
X3200	1-781-696-21	s	VIBRATOR, CRYSTAL (32.768 KHz)
X3400	1-813-065-11	s	VIBRATOR, CRYSTAL (25 MHz)
X3600	1-795-752-21	s	VIBRATOR, CRYSTAL (12 MHz)
X4000	1-813-985-11	s	QUARTZ CRYSTAL OSCILLATOR
X8300	1-814-021-11	s	OSCILLATOR, CRYSTAL(74.250MHZ)

PT1 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1819-657-A	s	MOUNTED CIRCUIT BOARD, PT1
C300	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
C301	1-114-325-11	s	CAP, CERAMIC 0.1MF X7R 1608
C302	1-114-332-11	s	CAP, CERAMIC 22MF X6S 2012
CN300	1-819-465-11	s	HEADER ASSEMBLY FOR PWB 4P
DR300	1-802-245-11	s	ESD SUPPRESSOR
DR301	1-802-245-11	s	ESD SUPPRESSOR
IC300	6-714-568-01	s	IC LM75AIMX/NOPB
R301	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R303	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R305	1-216-833-91	s	RES, CHIP 10K (1608)
R306	1-216-833-91	s	RES, CHIP 10K (1608)
R308	1-216-833-91	s	RES, CHIP 10K (1608)
R309	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)


5-4. Packing Materials & Supplied Accessories

PACKING MATERIALS & SUPPLIED ACCESSORIES

*1:[PVM-1741 (SY)]
*2:[PVM-1741 (CN)]
*3:[PVM-1741A (SY)]
*4:[PVM-1741A (CN)]

Ref. No. or Q'ty	Part No.	SP	Description
4pcs	2-580-600-01	s	SCREW, +PSW M4X8 (For assembling rack mount to the monitor)
1pc	2-990-242-01	s	HOLDER (B), PLUG
1pc *1	4-284-711-23	s	OPERATING INSTRUCTIONS (JAPANESE, ENGLISH)
1pc *1	4-421-338-03	s	CD-ROM OPERATING INSTRUCTIONS (JAPANESE, ENGLISH, FRENCH, GERMAN, ITALIAN, SPANISH, SIMPLIFIED CHINESE, TRADITIONAL CHINESE, KOREAN) MANUAL, INTERFACE (JAPANESE, ENGLISH)
2pcs	4-294-057-01	s	BRACKET, MOUNTING
4pcs *1*2	7-628-000-04	s	SCREW +PS 5X14 (For rack mount assembling)
2pcs *1*2 ⚠	4-455-895-01	s	HANDLE
1pc *3 ⚠	4-461-016-02	s	CD-ROM OPERATING INSTRUCTIONS (JAPANESE, ENGLISH, FRENCH, GERMAN, ITALIAN, SPANISH, SIMPLIFIED CHINESE, TRADITIONAL CHINESE, KOREAN) MANUAL, INTERFACE (JAPANESE, ENGLISH)
1pc *2*4 ⚠	1-830-860-11	s	AC POWER-SUPPLY CORD (250V/10A)
2pcs *3*4	X-2588-822-1	s	BRACKET ASSY, RACK

Section 6
Block Diagrams

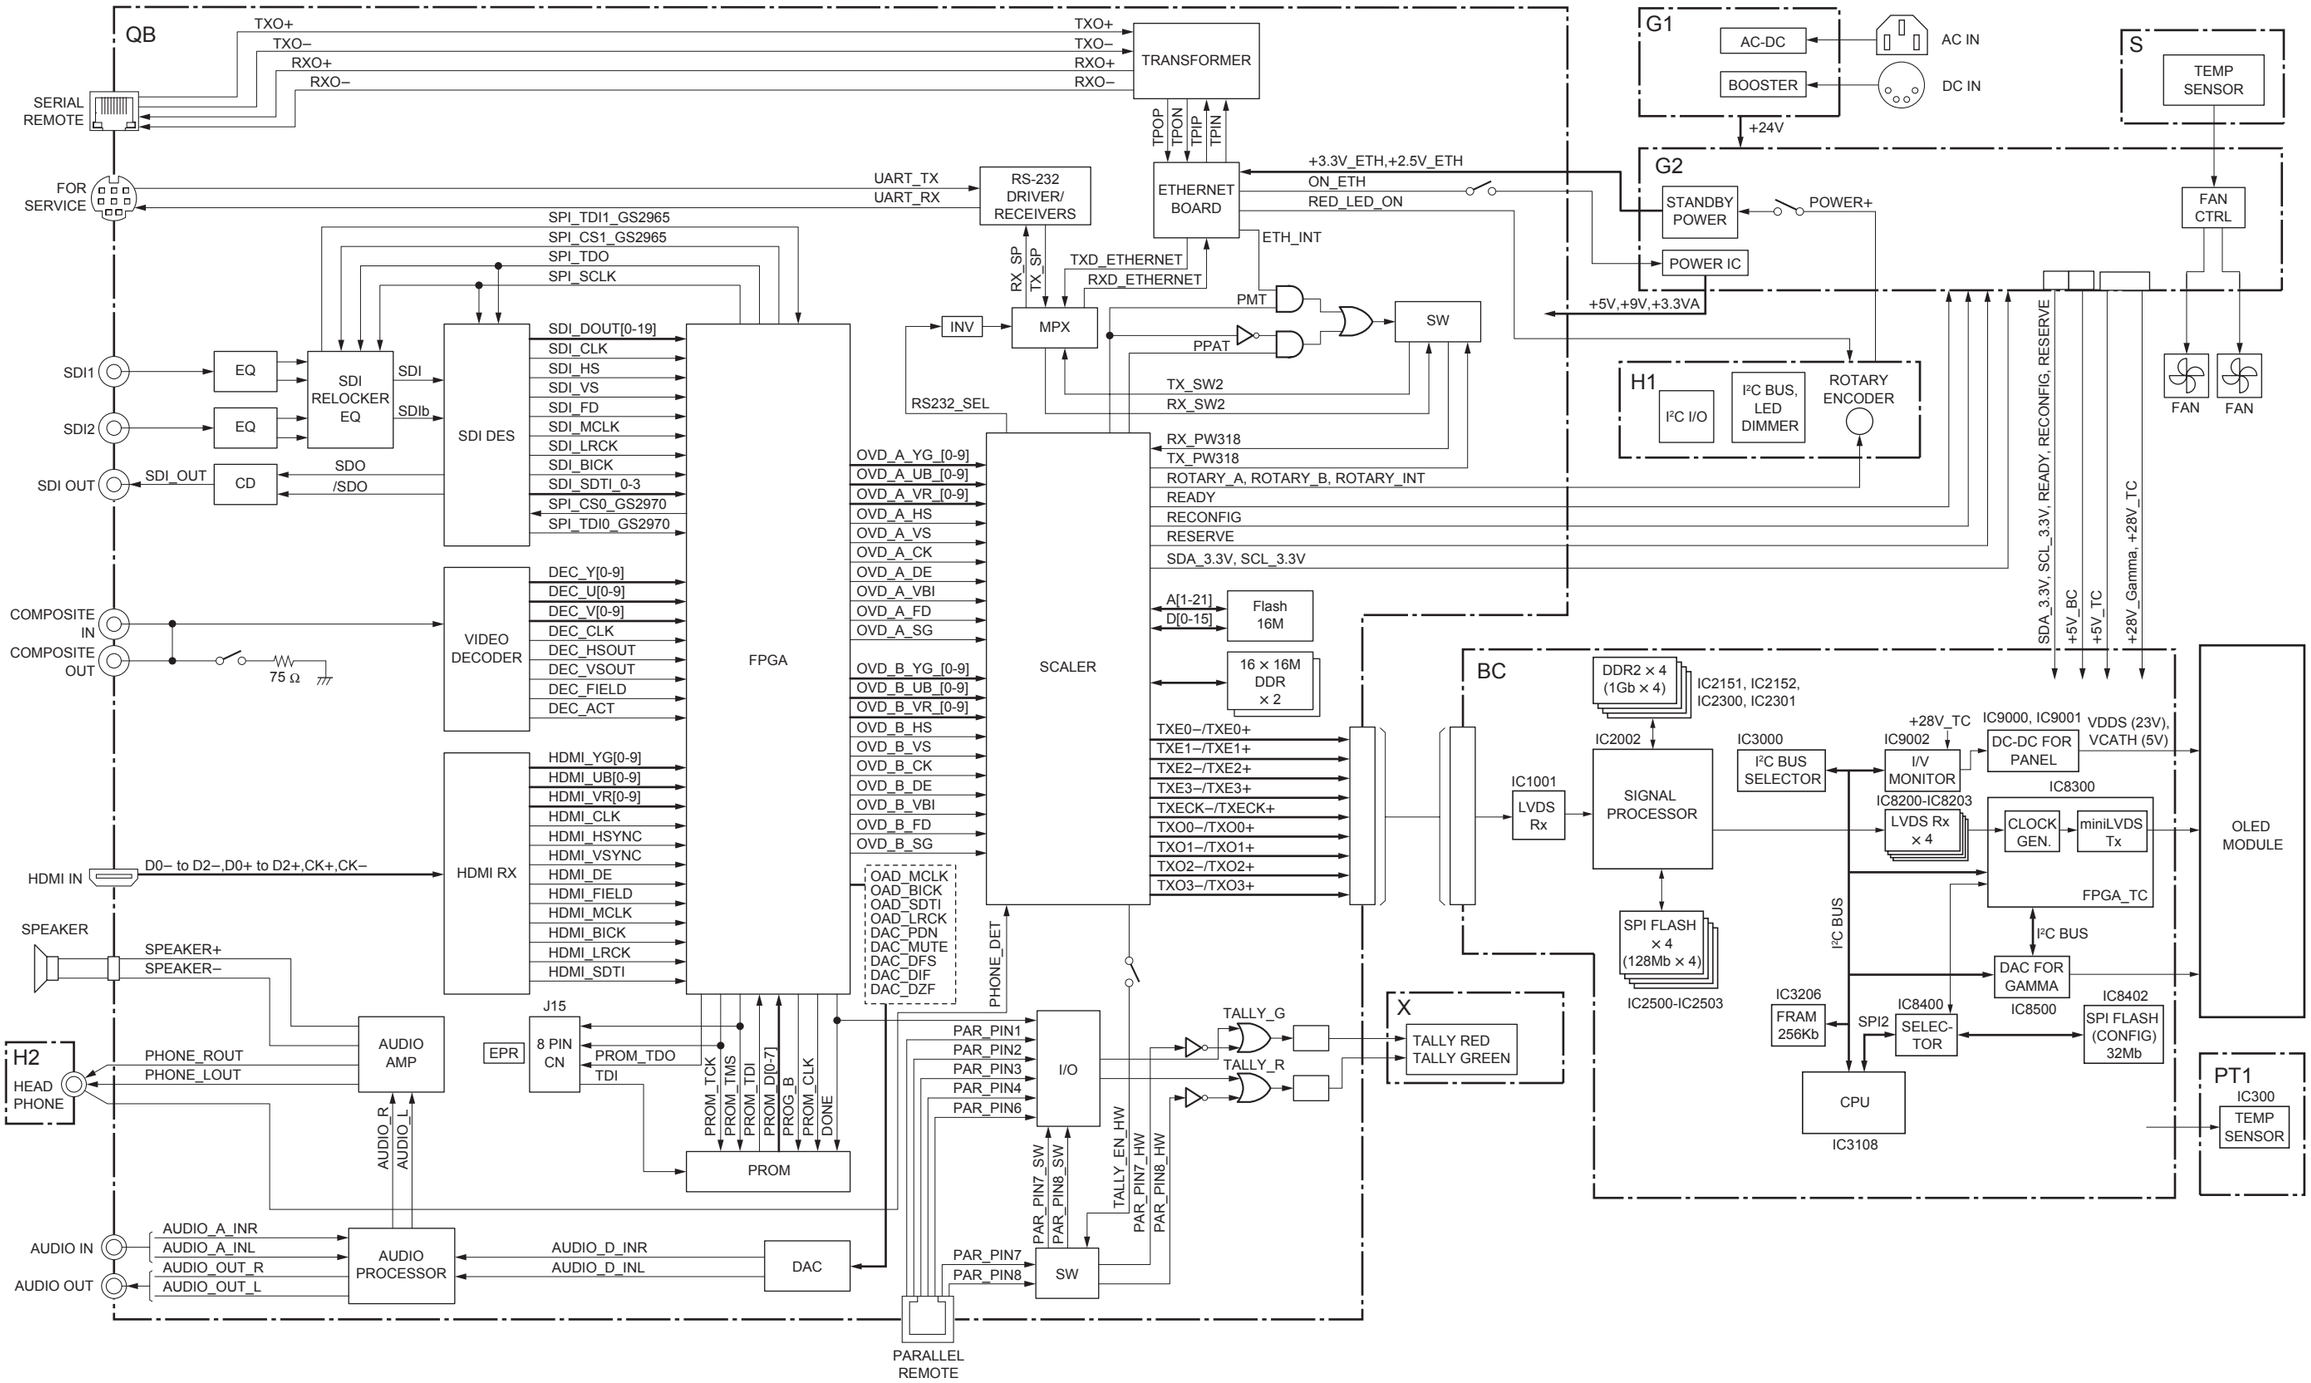


Section 7
Schematic Diagrams

Index


Board name	Page
PT1	7-1
BC	7-2
Frame Wiring	7-35


PT1

SUFFIX: -11

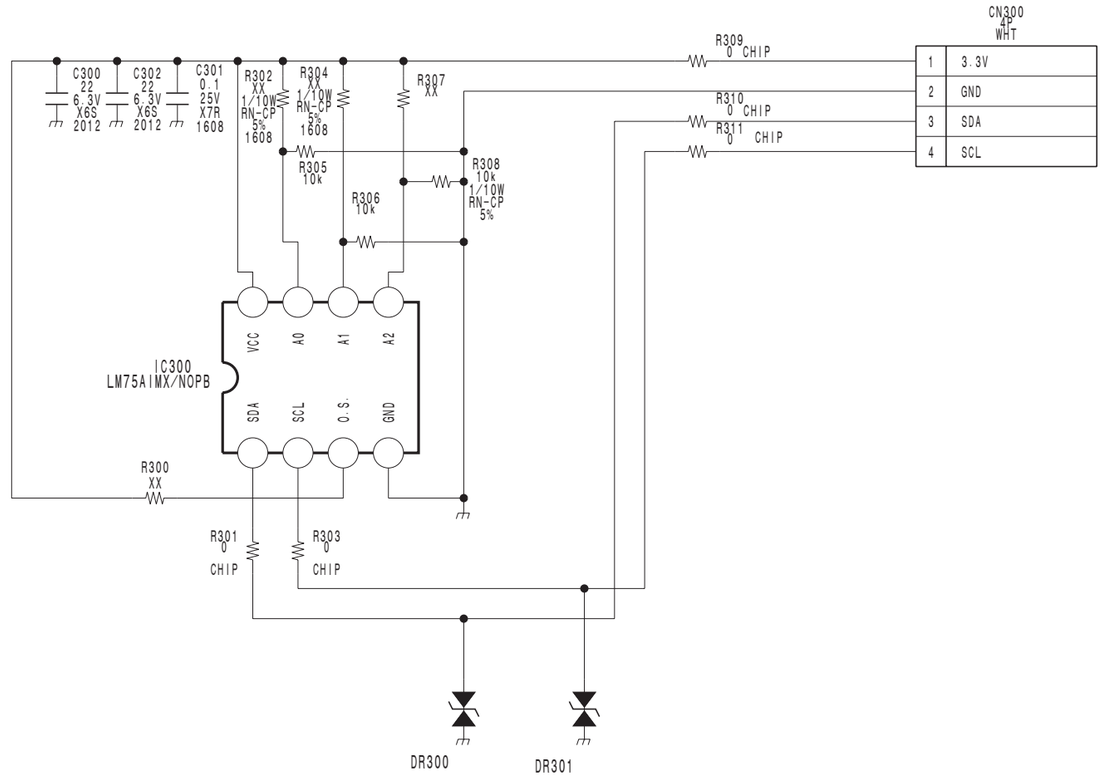



PT1
BOARD NO. 1-884-400-11

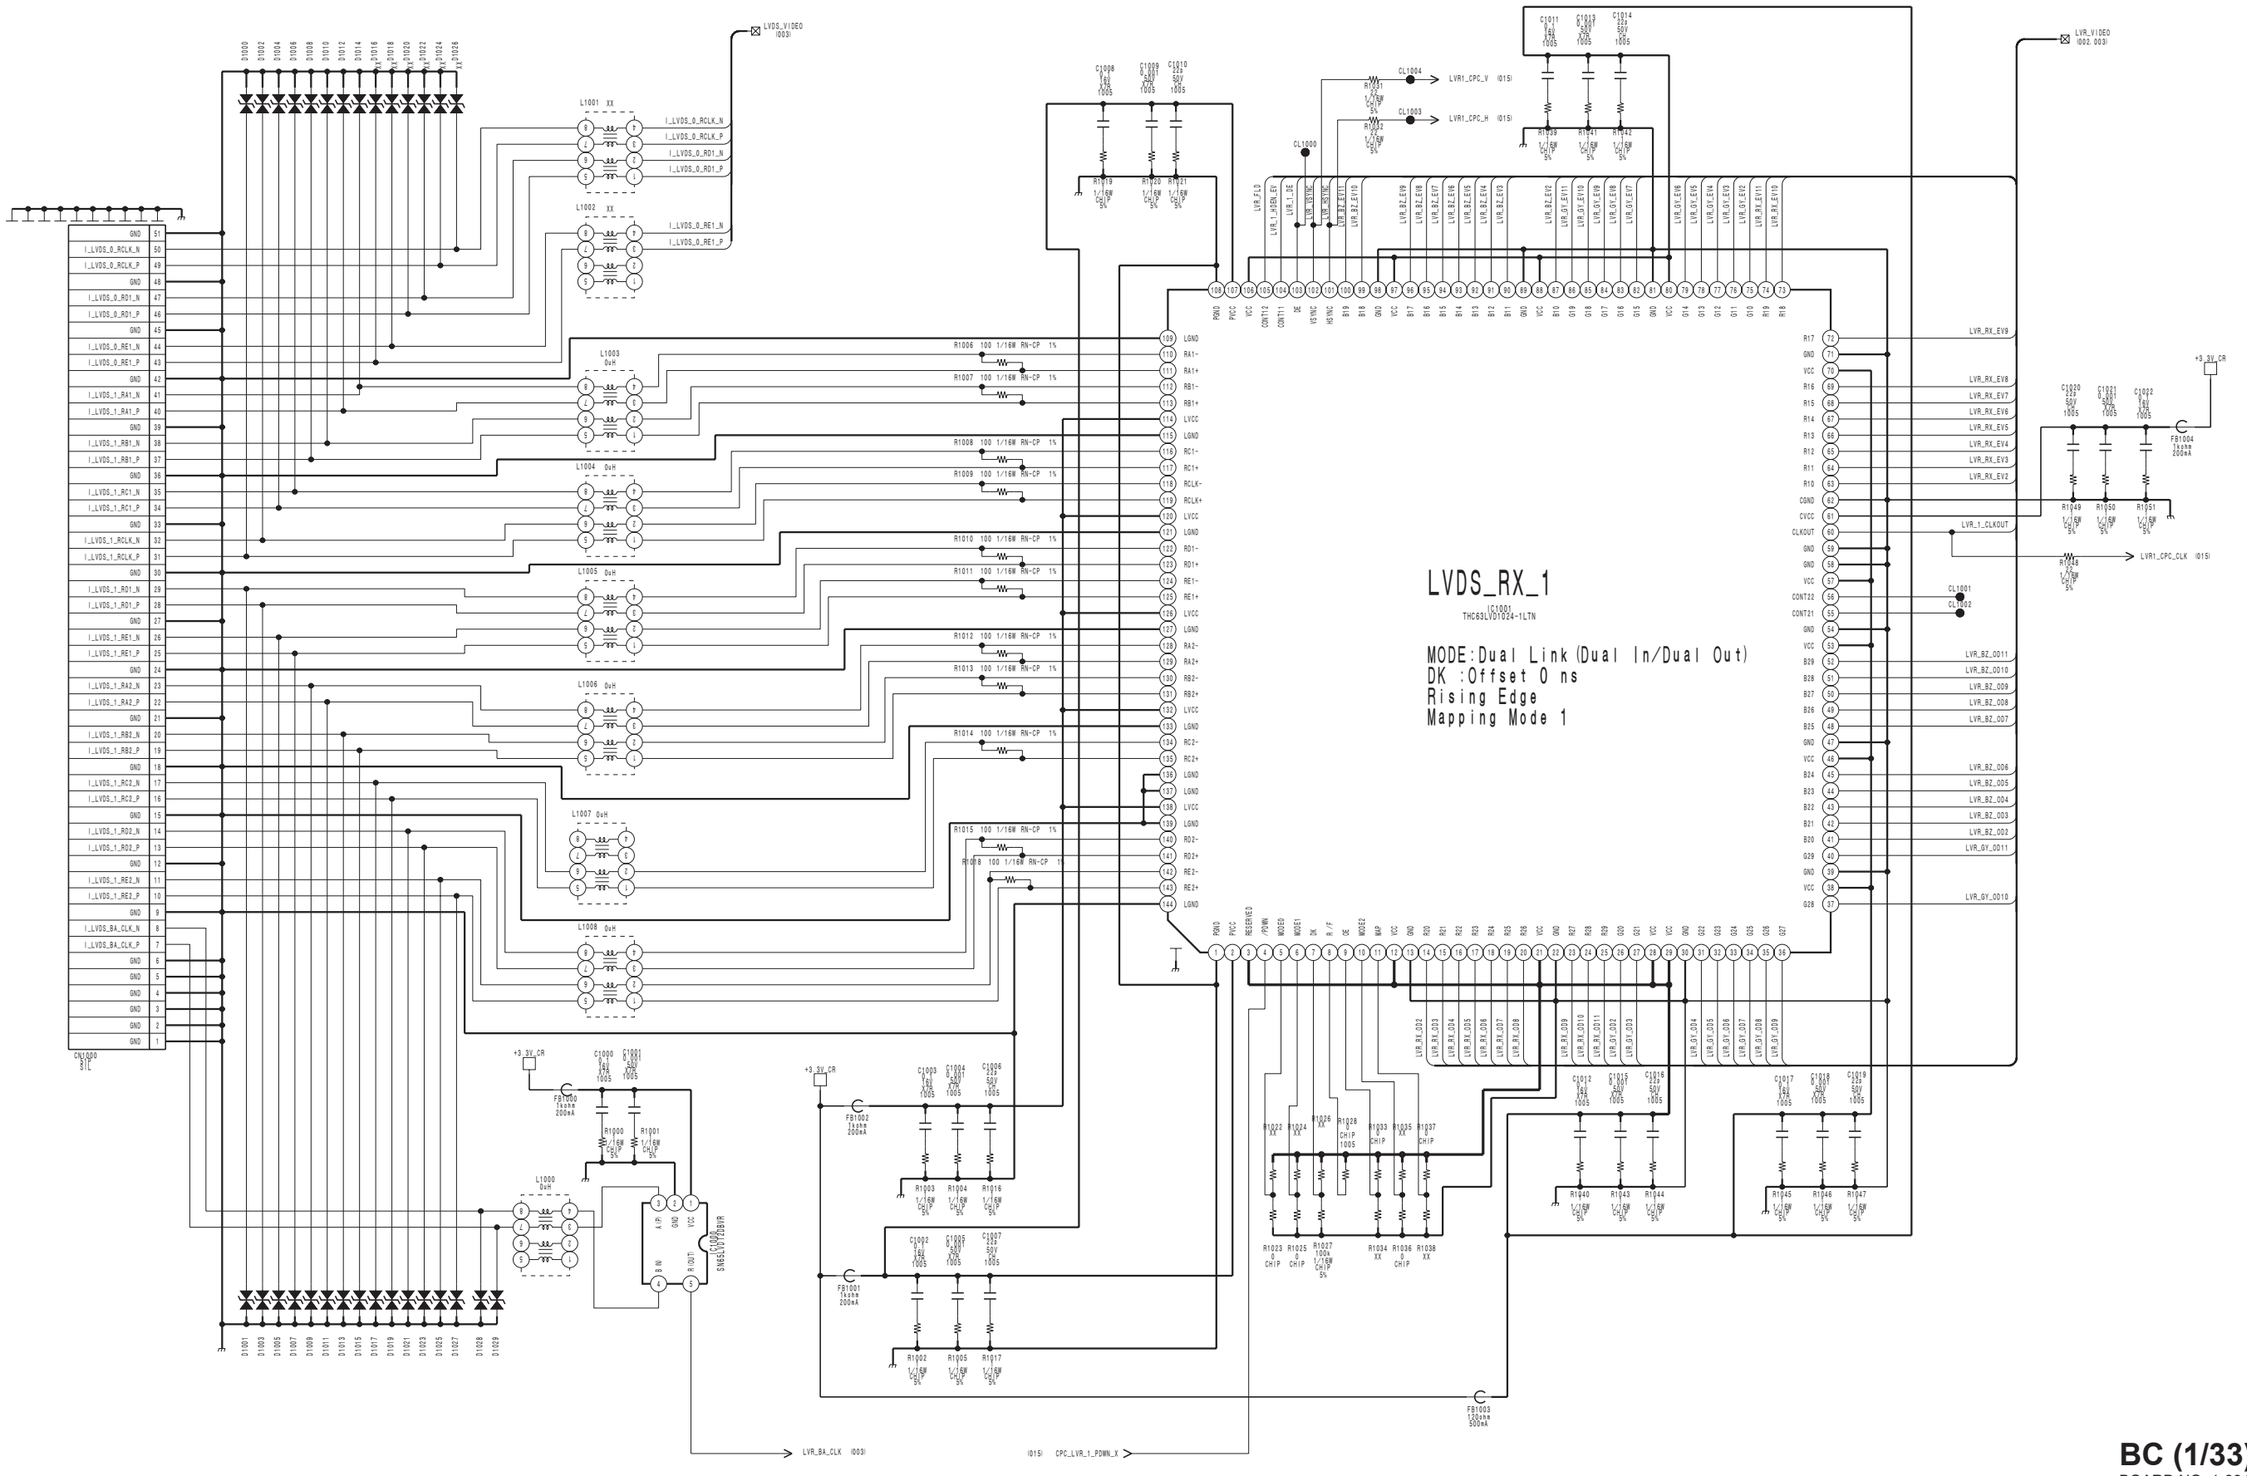
LVDS_RX_1
IC1001
THC63LVDT1024-1LTN
MODE:Dual Link(Dual In/Dual Out)
DK :Offset 0 ns
Rising Edge
Mapping Mode 1
LVDS_VIDEO (003)
LVR_VIDEO (002, 003)
CN1000 51P
L1000 0uH
L1001 XX
L1002 XX
L1003 0uH
L1004 0uH
L1005 0uH
L1006 0uH
L1007 0uH
L1008 0uH
I_LVDS_0_RCLK_N
I_LVDS_0_RCLK_P
I_LVDS_0_RD1_N
I_LVDS_0_RD1_P
I_LVDS_0_RE1_N
I_LVDS_0_RE1_P
I_LVDS_1_RA1_N
I_LVDS_1_RA1_P
I_LVDS_1_RB1_N
I_LVDS_1_RB1_P
I_LVDS_1_RC1_N
I_LVDS_1_RC1_P
I_LVDS_1_RCLK_N
I_LVDS_1_RCLK_P
I_LVDS_1_RD1_N
I_LVDS_1_RD1_P
I_LVDS_1_RE1_N
I_LVDS_1_RE1_P
I_LVDS_1_RA2_N
I_LVDS_1_RA2_P
I_LVDS_1_RB2_N
I_LVDS_1_RB2_P
I_LVDS_1_RC2_N
I_LVDS_1_RC2_P
I_LVDS_1_RD2_N
I_LVDS_1_RD2_P
I_LVDS_1_RE2_N
I_LVDS_1_RE2_P
I_LVDS_BA_CLK_N
I_LVDS_BA_CLK_P
LVR_BA_CLK (003)
(015) CPC_LVR_1_PDWN_X
LVR1_CPC_V (015)
LVR1_CPC_H (015)
LVR1_CPC_CLK (015)
LVR_1_CLKOUT
LVR_RX_EV9
LVR_RX_EV8
LVR_RX_EV7
LVR_RX_EV6
LVR_RX_EV5
LVR_RX_EV4
LVR_RX_EV3
LVR_RX_EV2
LVR_BZ_0011
LVR_BZ_0010
LVR_BZ_009
LVR_BZ_008
LVR_BZ_007
LVR_BZ_006
LVR_BZ_005
LVR_BZ_004
LVR_BZ_003
LVR_BZ_002
LVR_GY_0011
LVR_GY_0010
+3.3V_CR
SN65LVDS9638DBVR

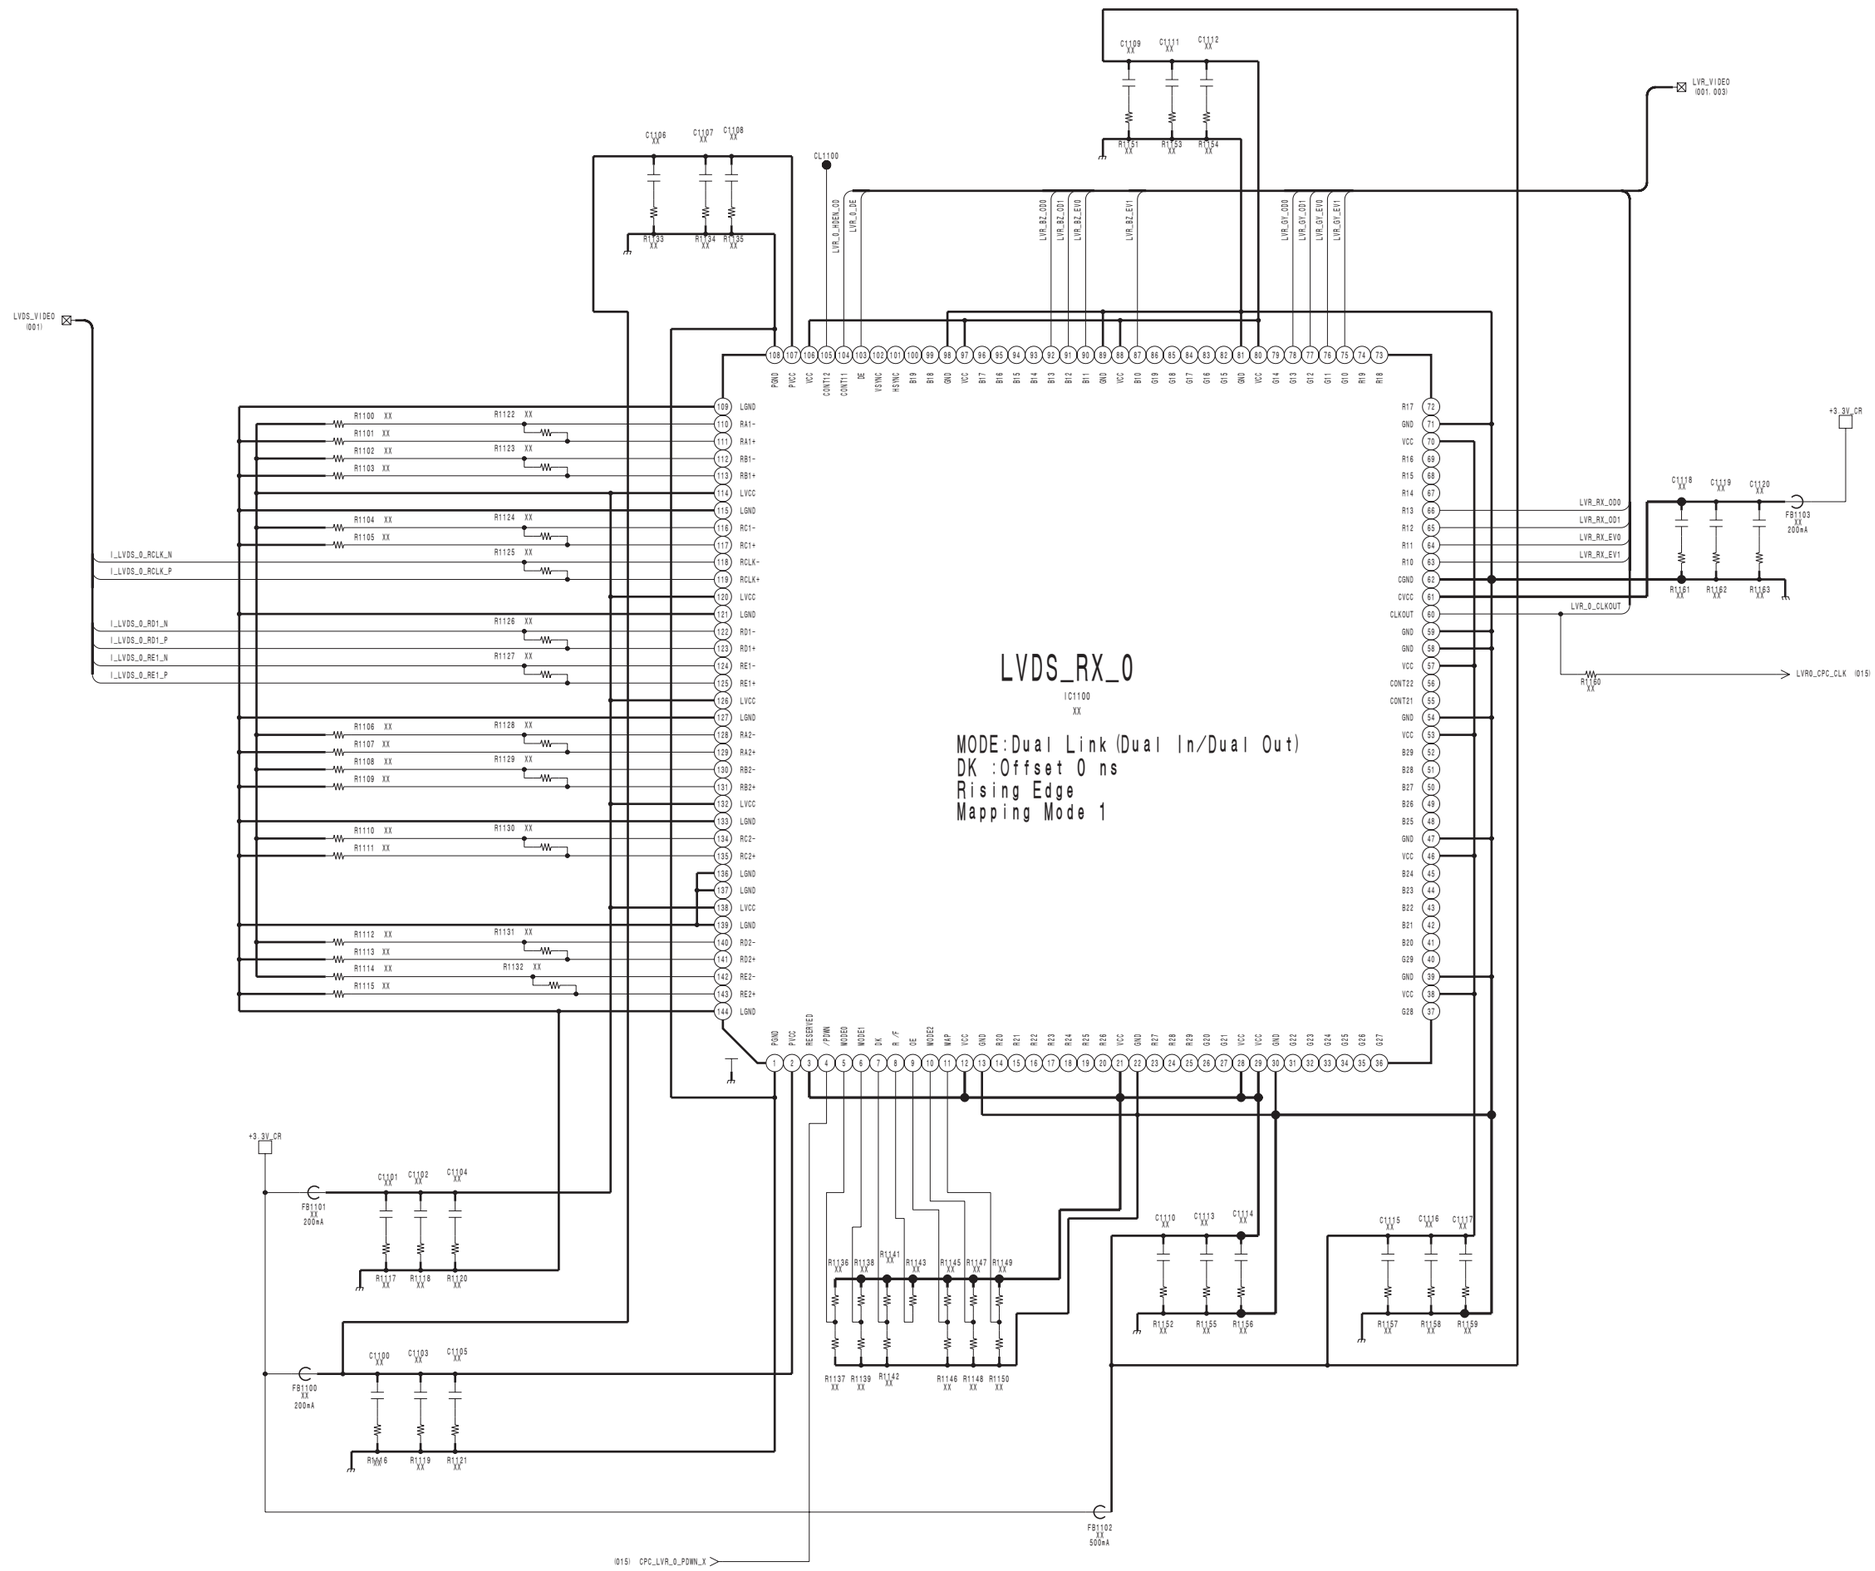

LVDS_RX_0
IC1100
XX
MODE:Dual Link(Dual In/Dual Out)
DK :Offset 0 ns
Rising Edge
Mapping Mode 1
LVDS_VIDEO (001)
LVR_VIDEO (001, 003)
I_LVDS_0_RCLK_N
I_LVDS_0_RCLK_P
I_LVDS_0_RD1_N
I_LVDS_0_RD1_P
I_LVDS_0_RE1_N
I_LVDS_0_RE1_P
LVR_RX_OD0
LVR_RX_OD1
LVR_RX_EV0
LVR_RX_EV1
LVR_0_CLKOUT
LVR0_CPC_CLK (015)
+3.3V_CR
FB1100 XX 200mA
FB1101 XX 200mA
FB1102 XX 500mA
(015) CPC_LVR_0_PDWN_X

BC (3/33) **SUFFIX: -12**

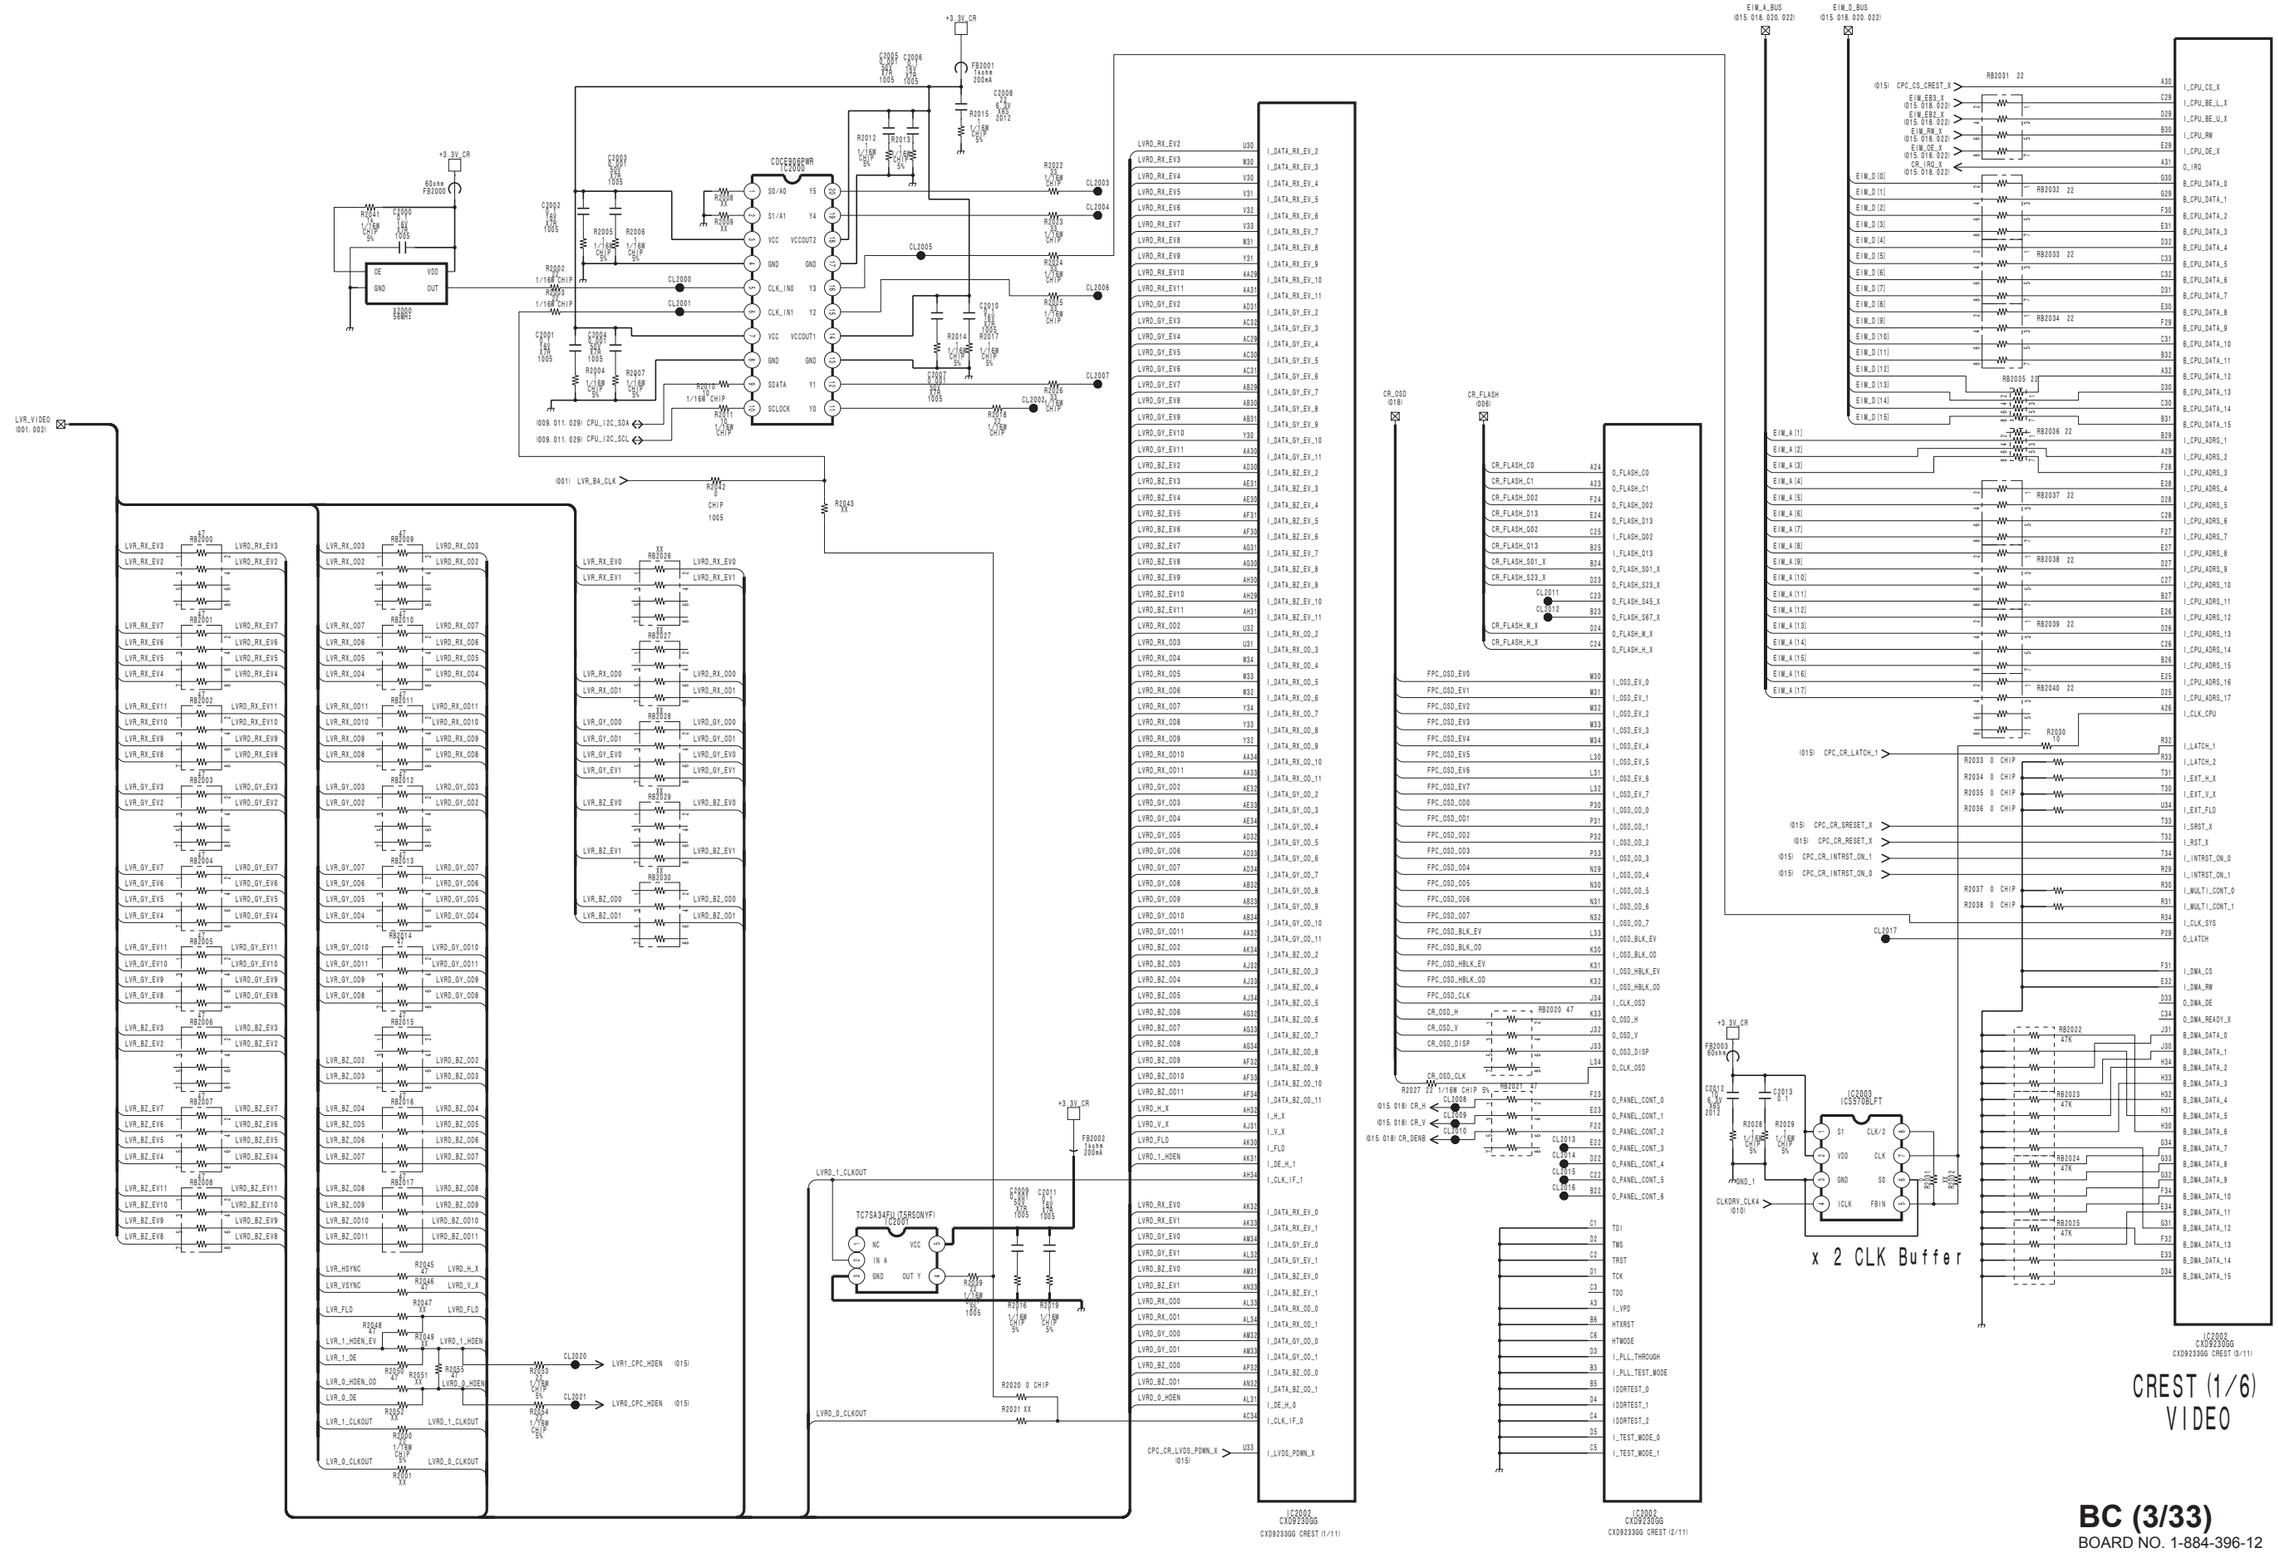

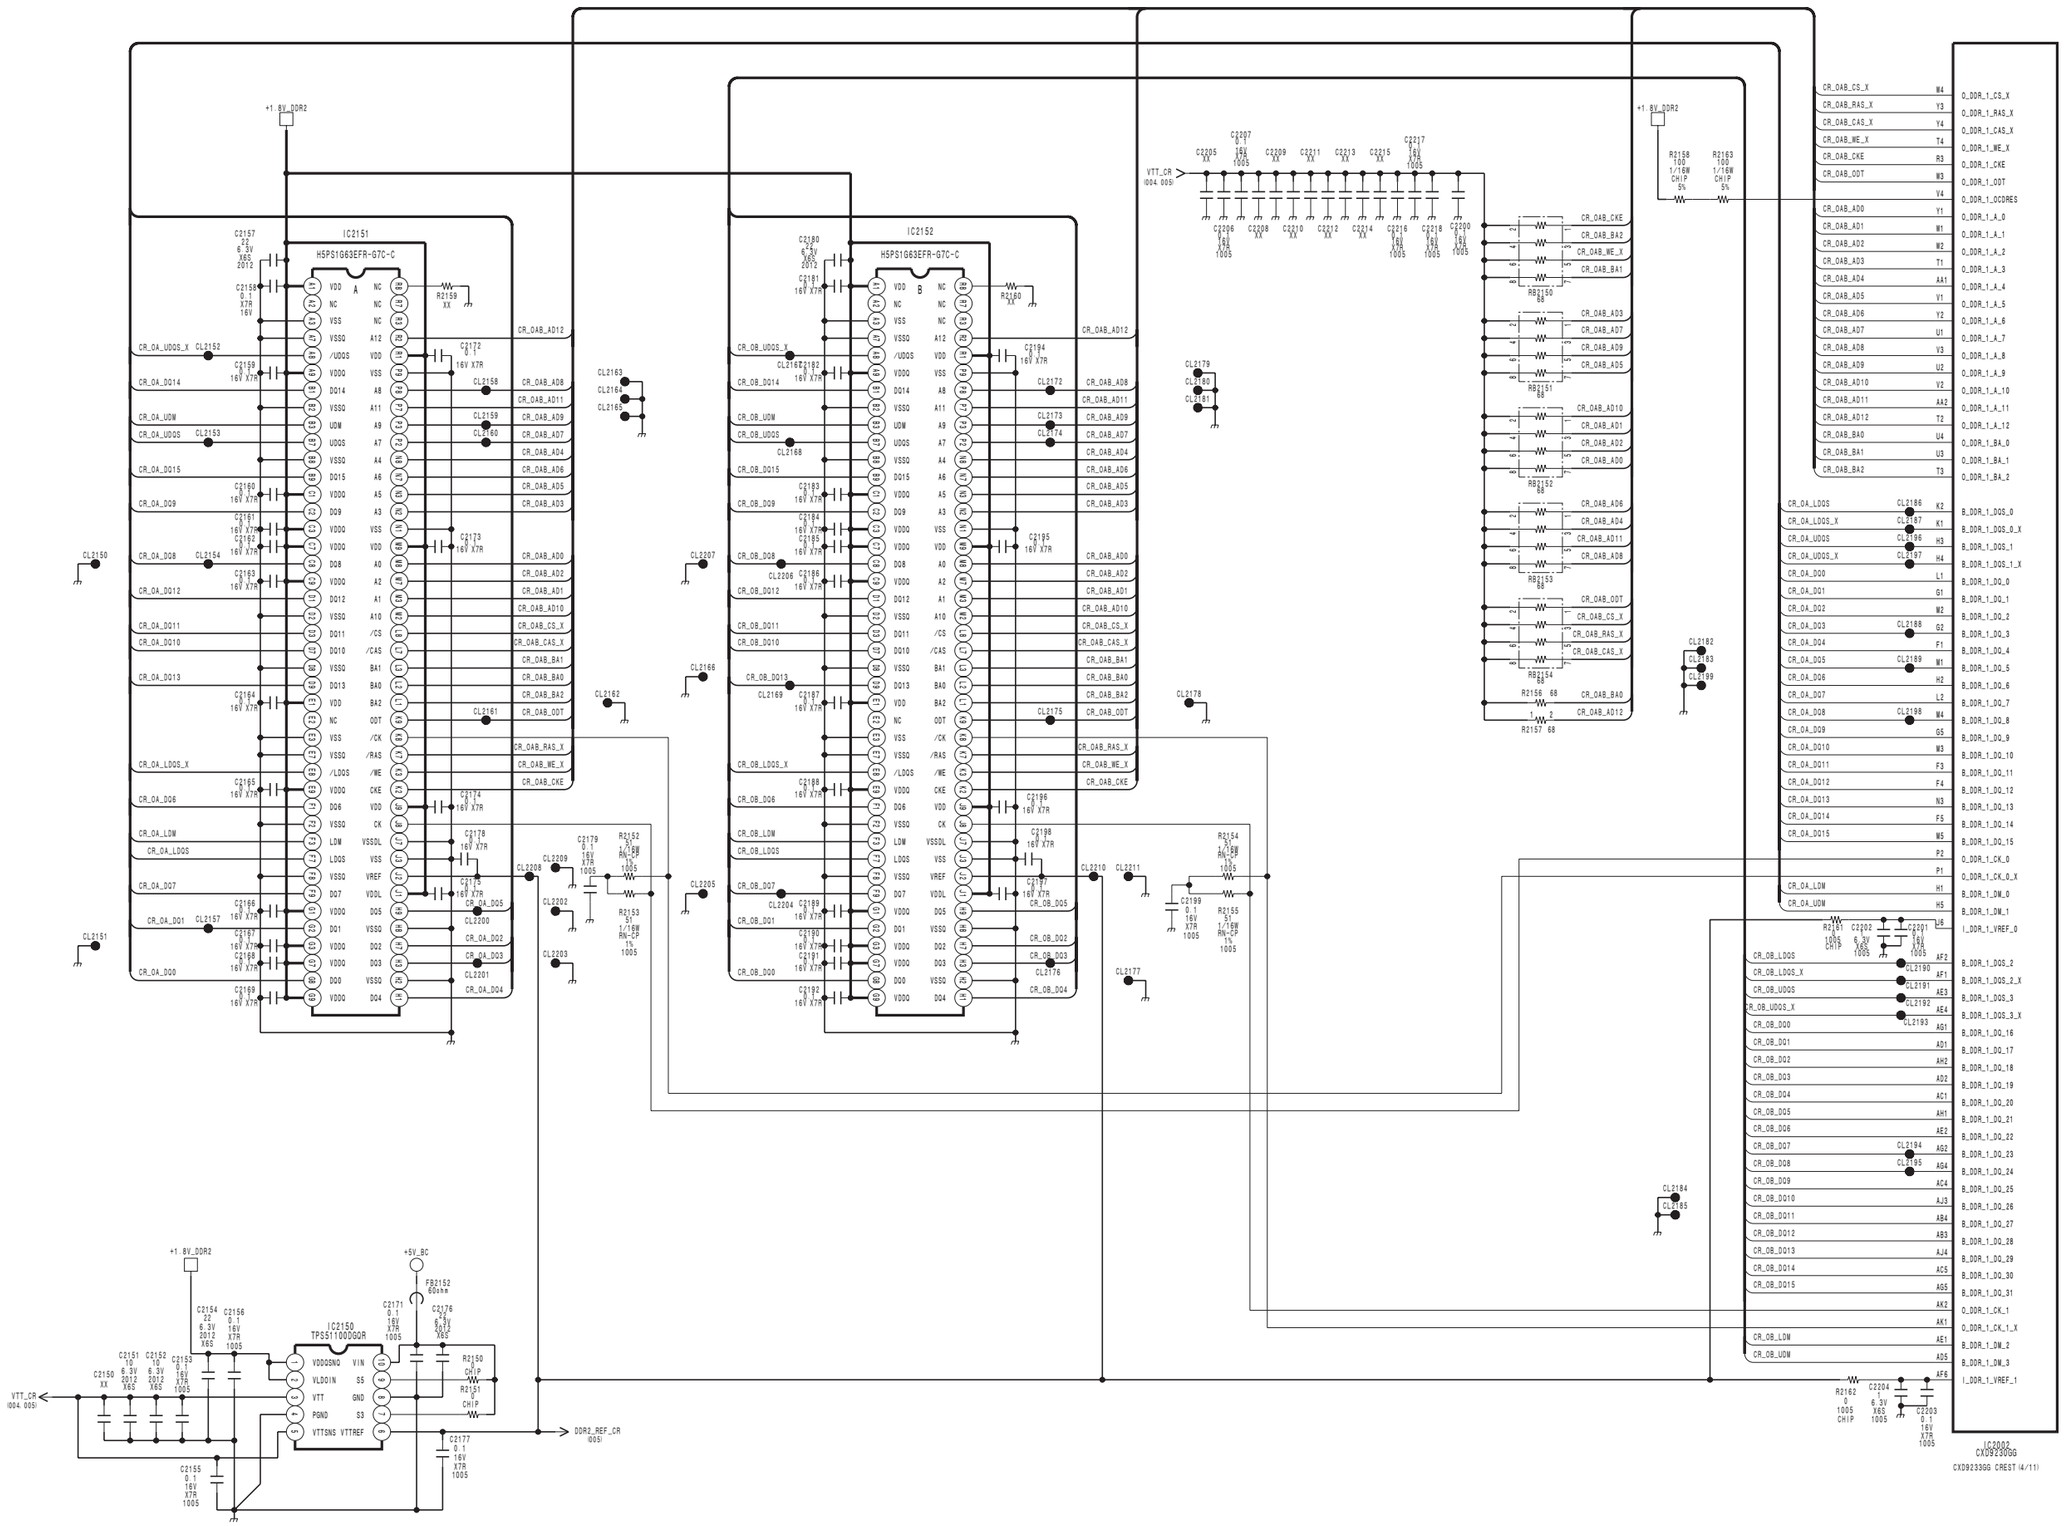


BC (4/33)
BOARD NO. 1-884-396-12

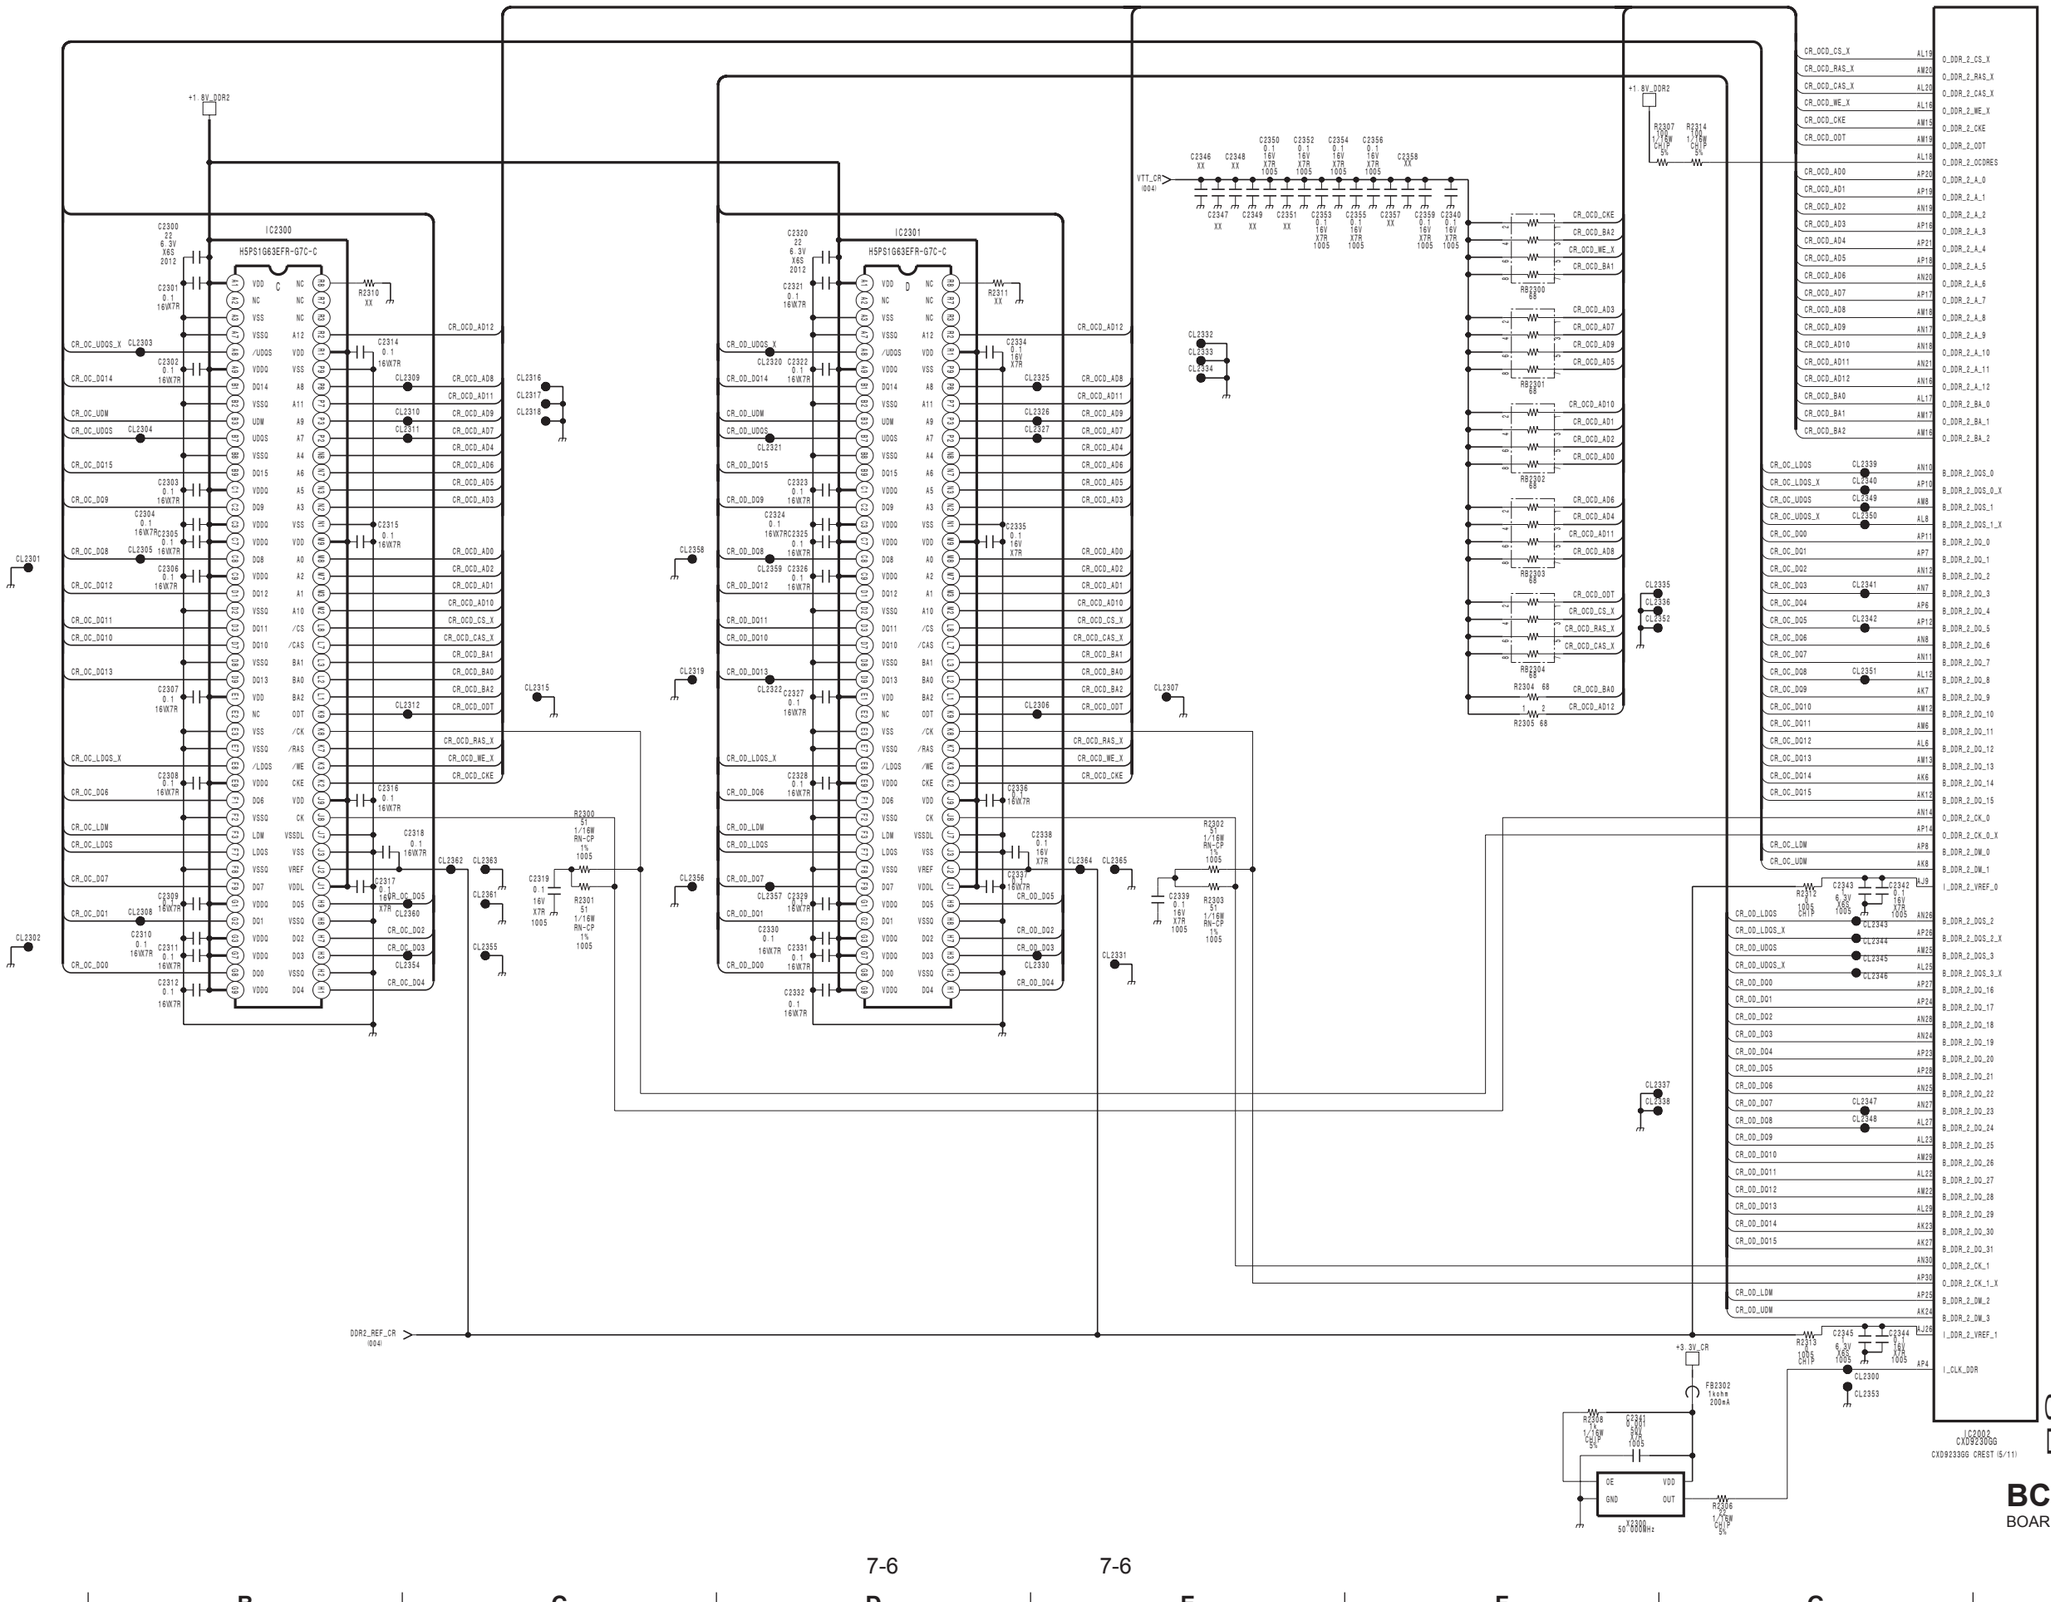

CREST (3/6)
DDR2 I/F

BC (5/33)
BOARD NO. 1-884-396-12


BC (6/33)
SUFFIX: -12

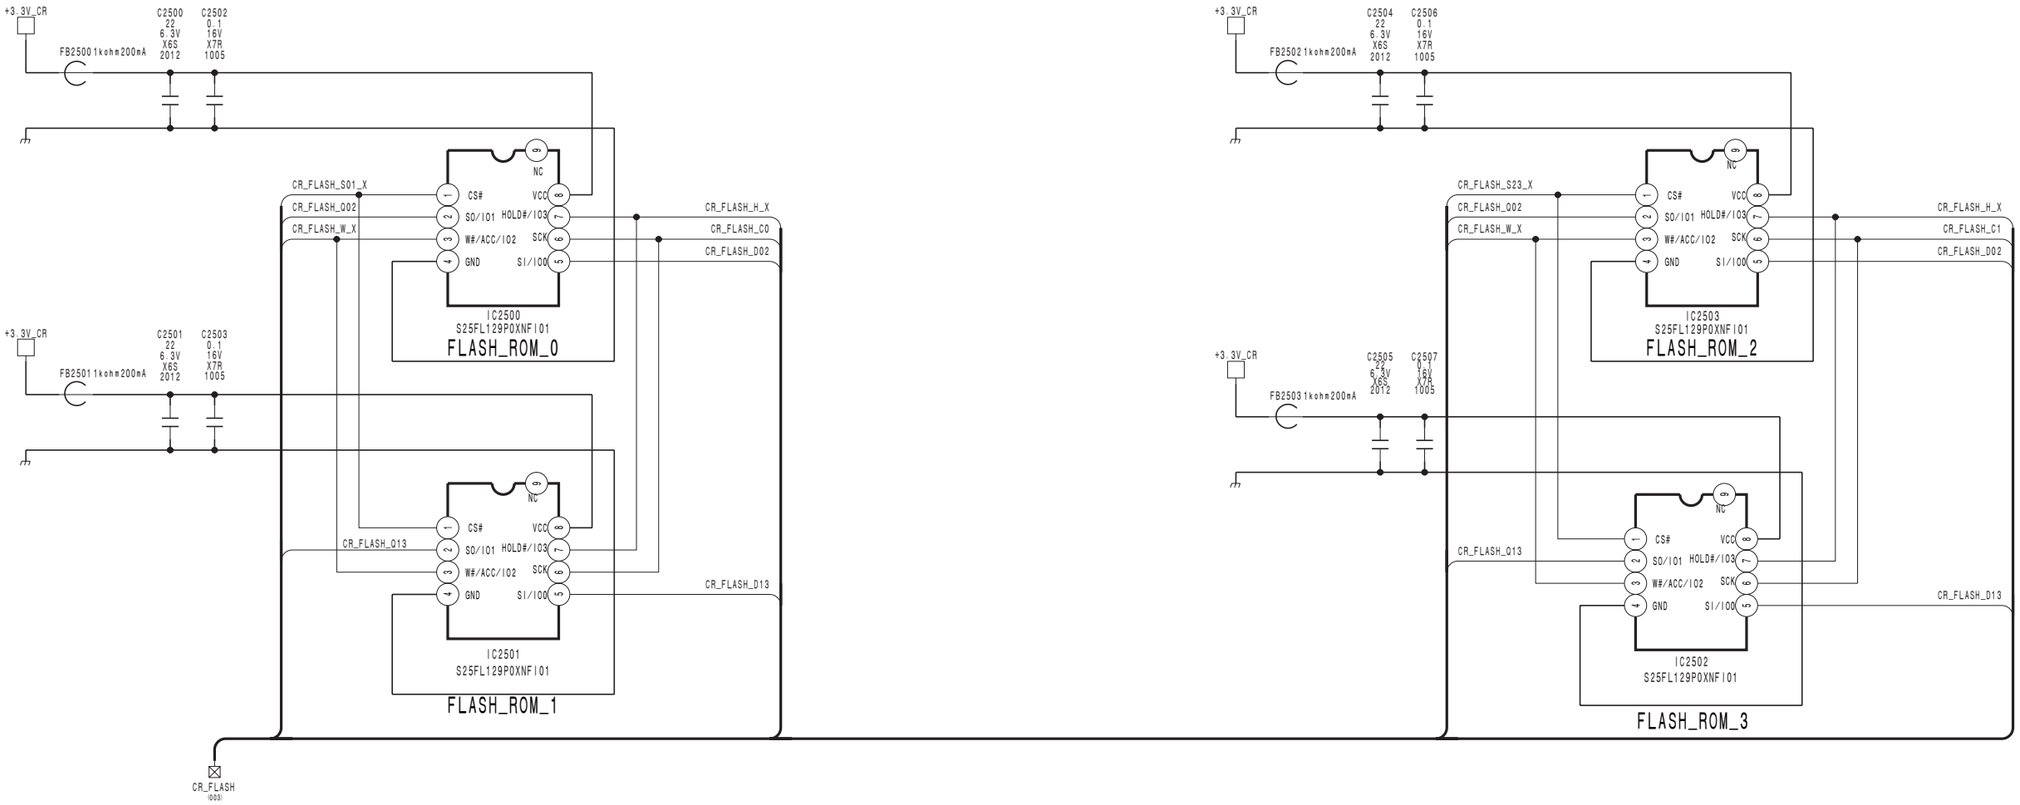

BC (6/33)
BOARD NO. 1-884-396-12

BC (7/33)


SUFFIX: -12

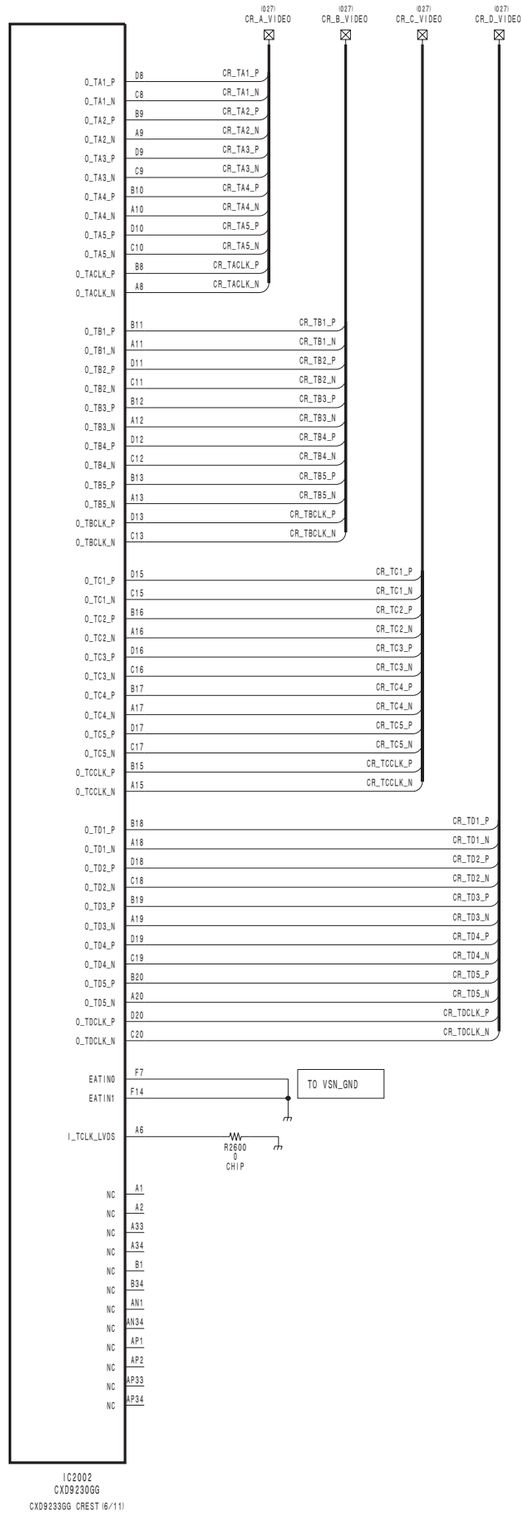

BC (7/33)

BOARD NO. 1-884-396-12


BC (8/33) SUFFIX: -12

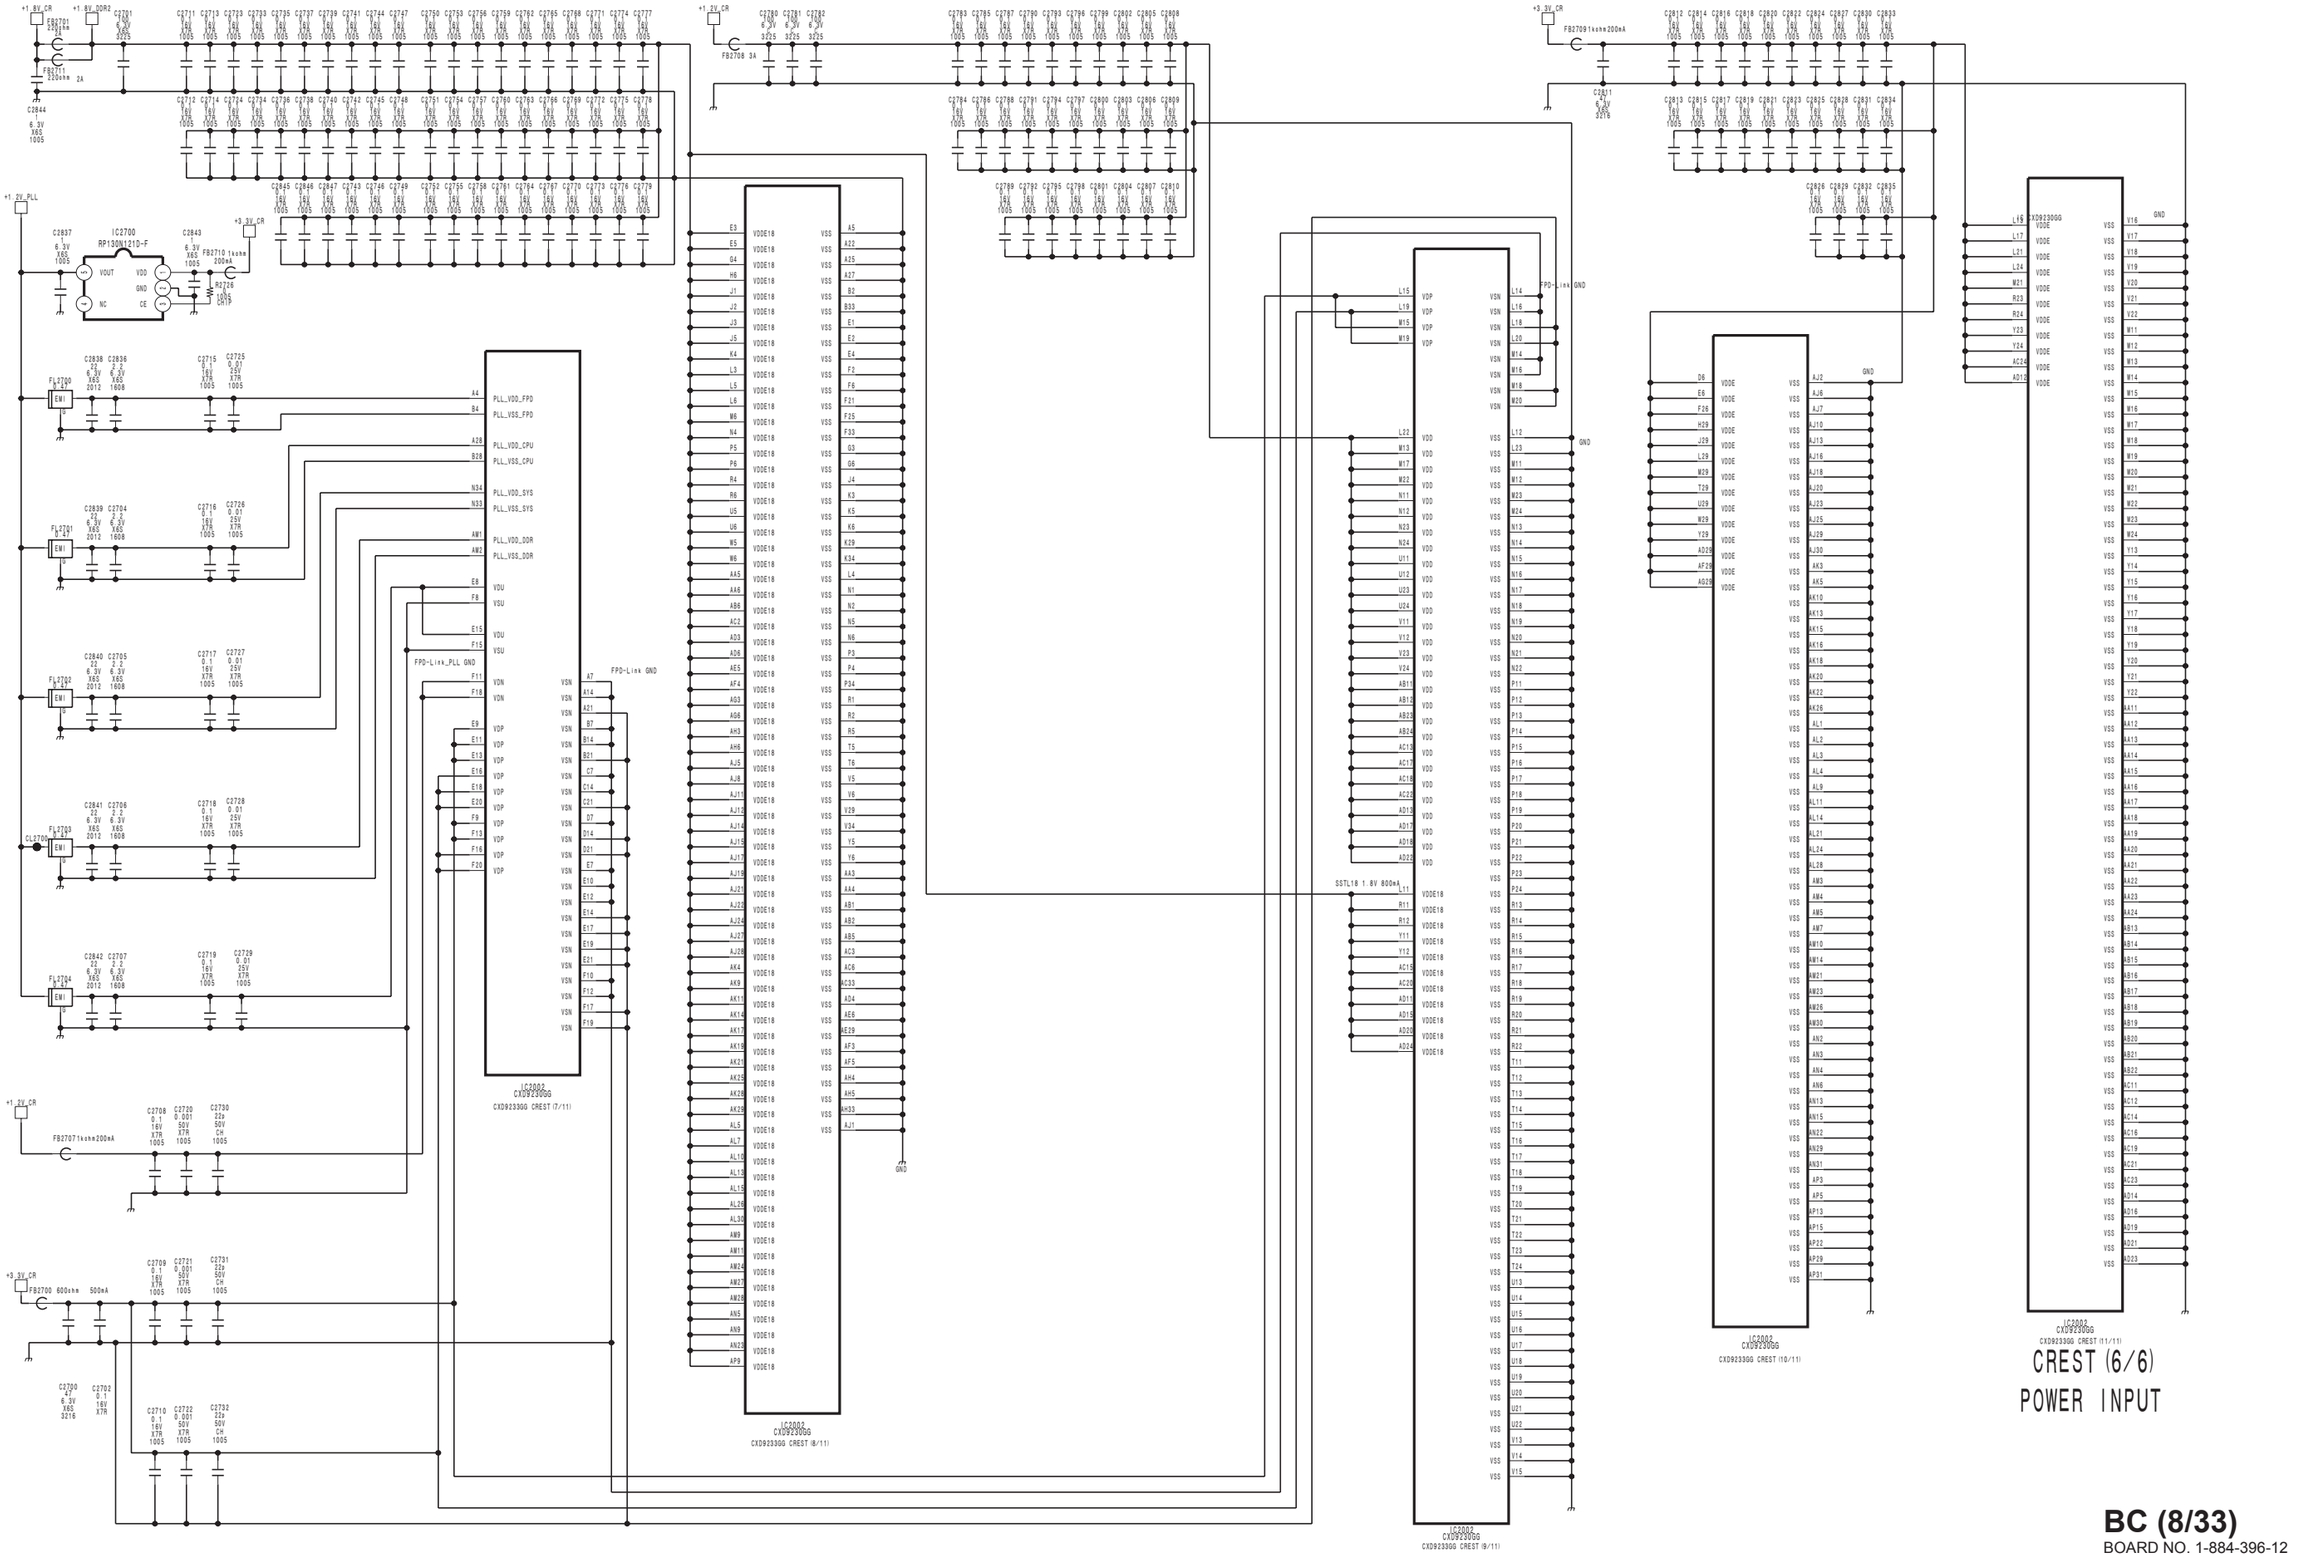


BC (8/33)
BOARD NO. 1-884-396-12

BC (9/33)
SUFFIX: -12

BC (9/33)
SUFFIX: -12

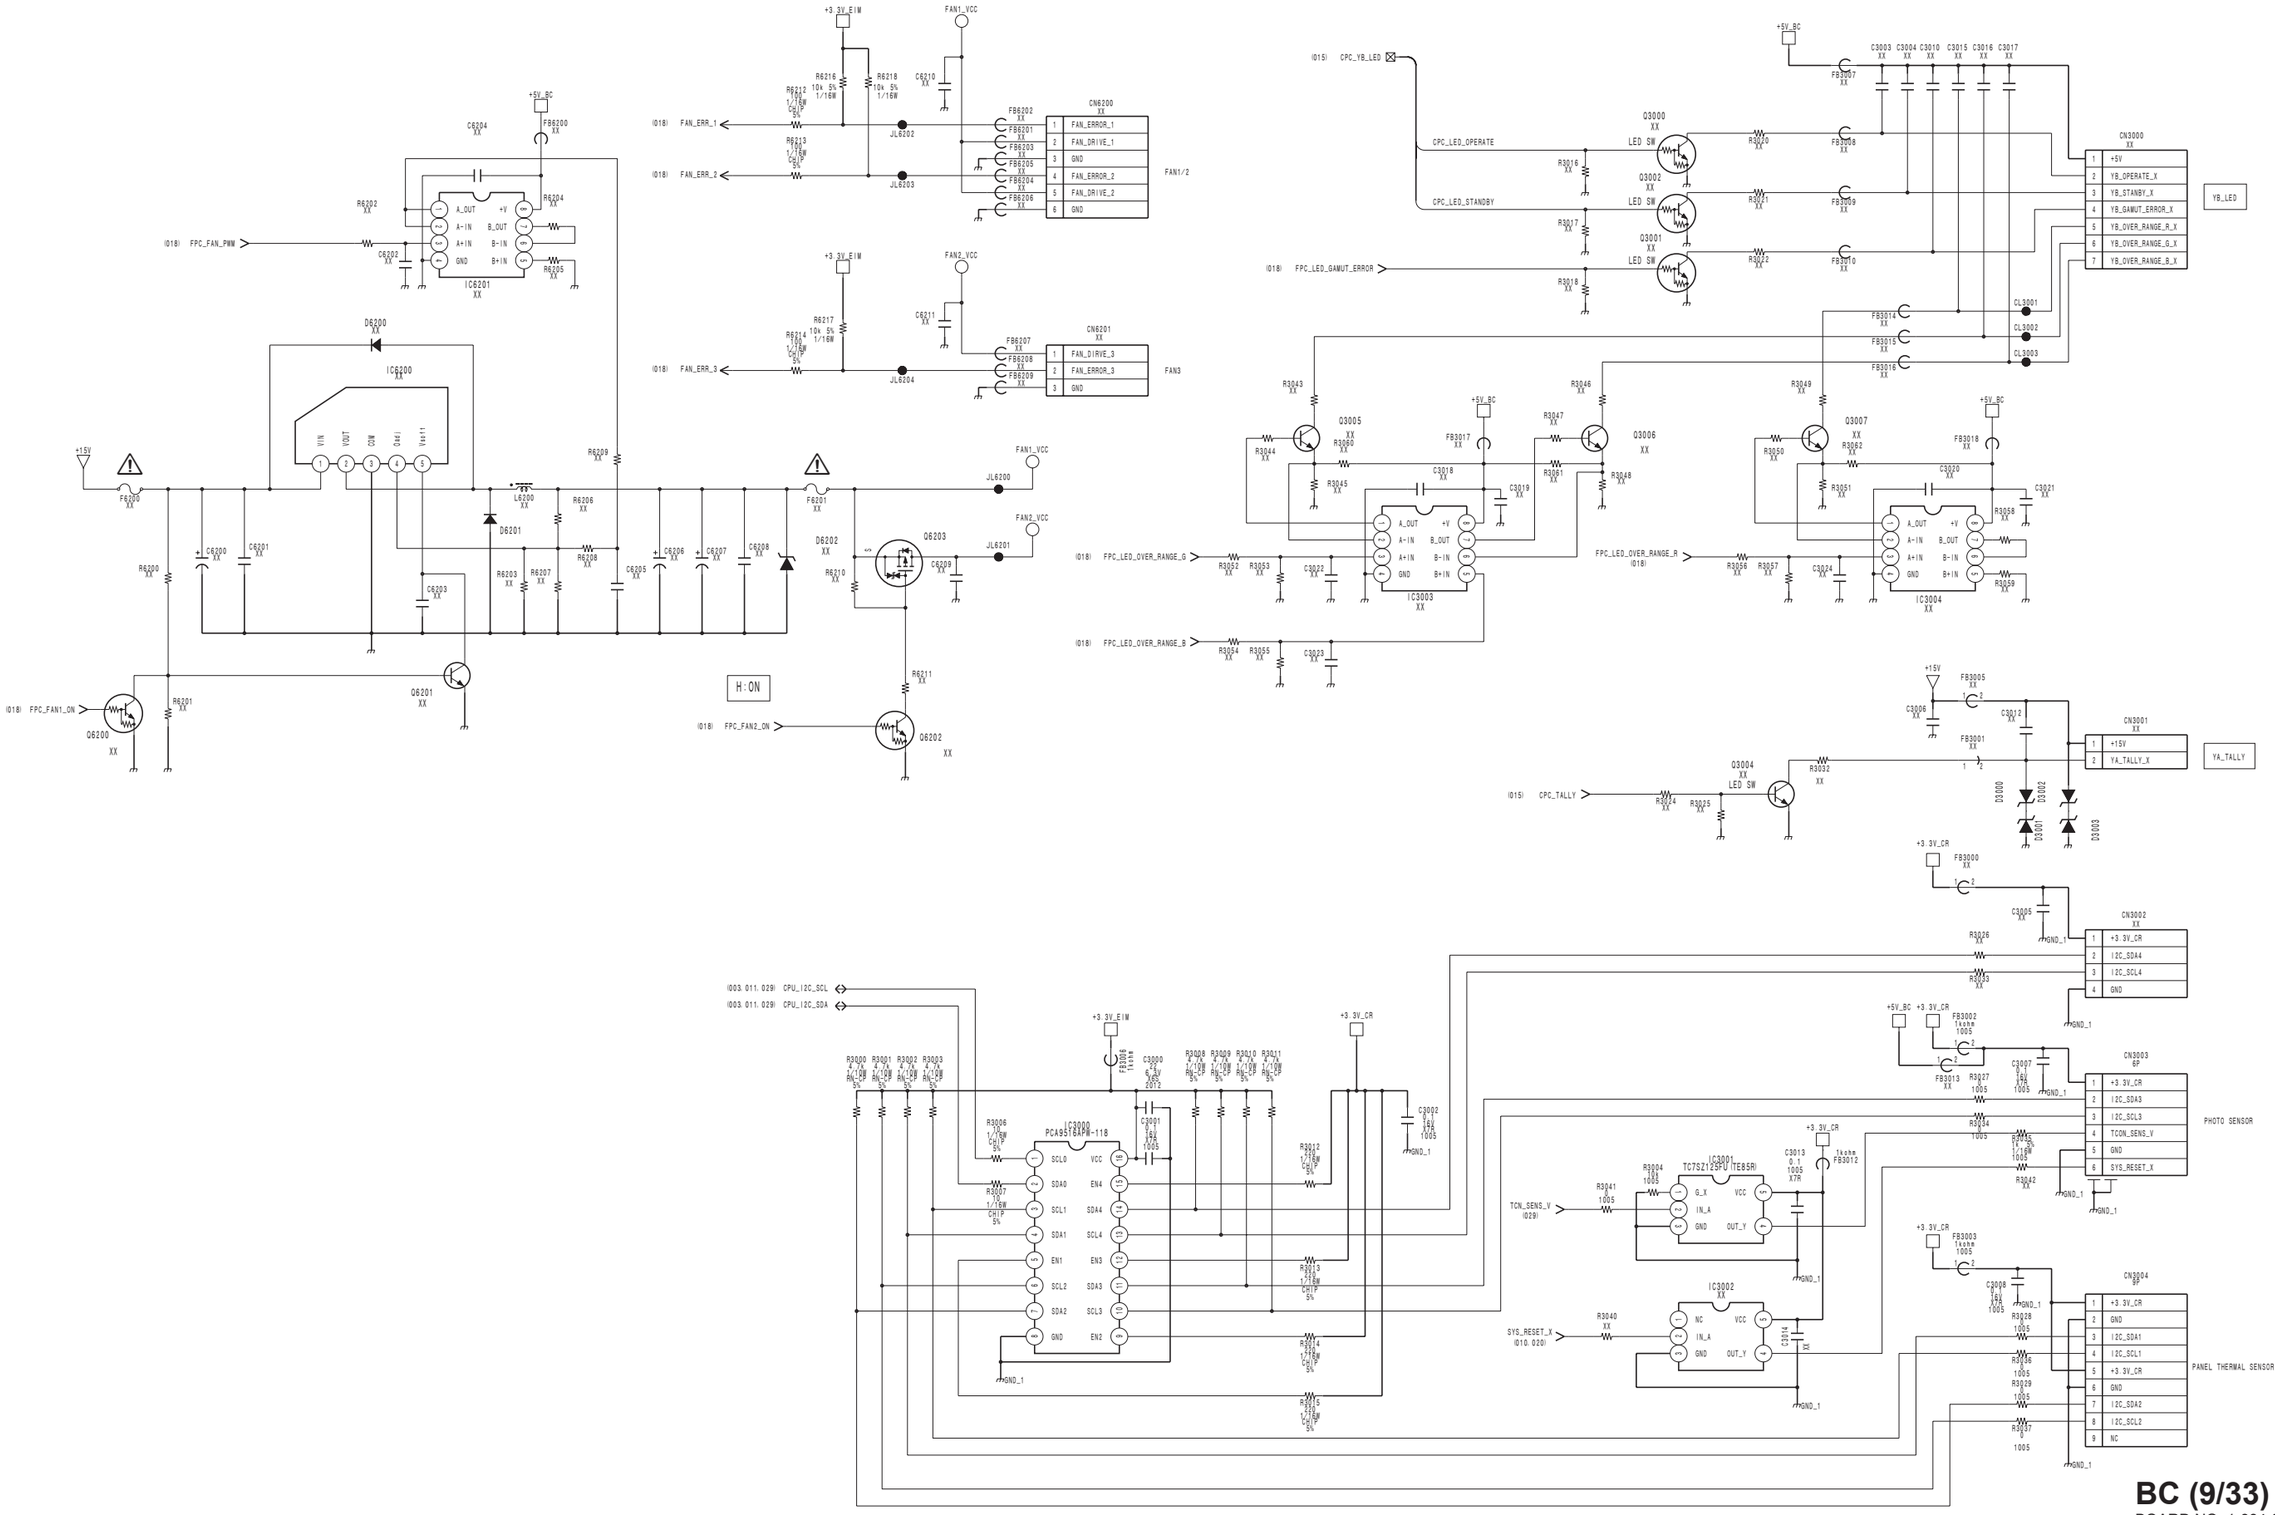

BC (9/33)
BOARD NO. 1-884-396-12

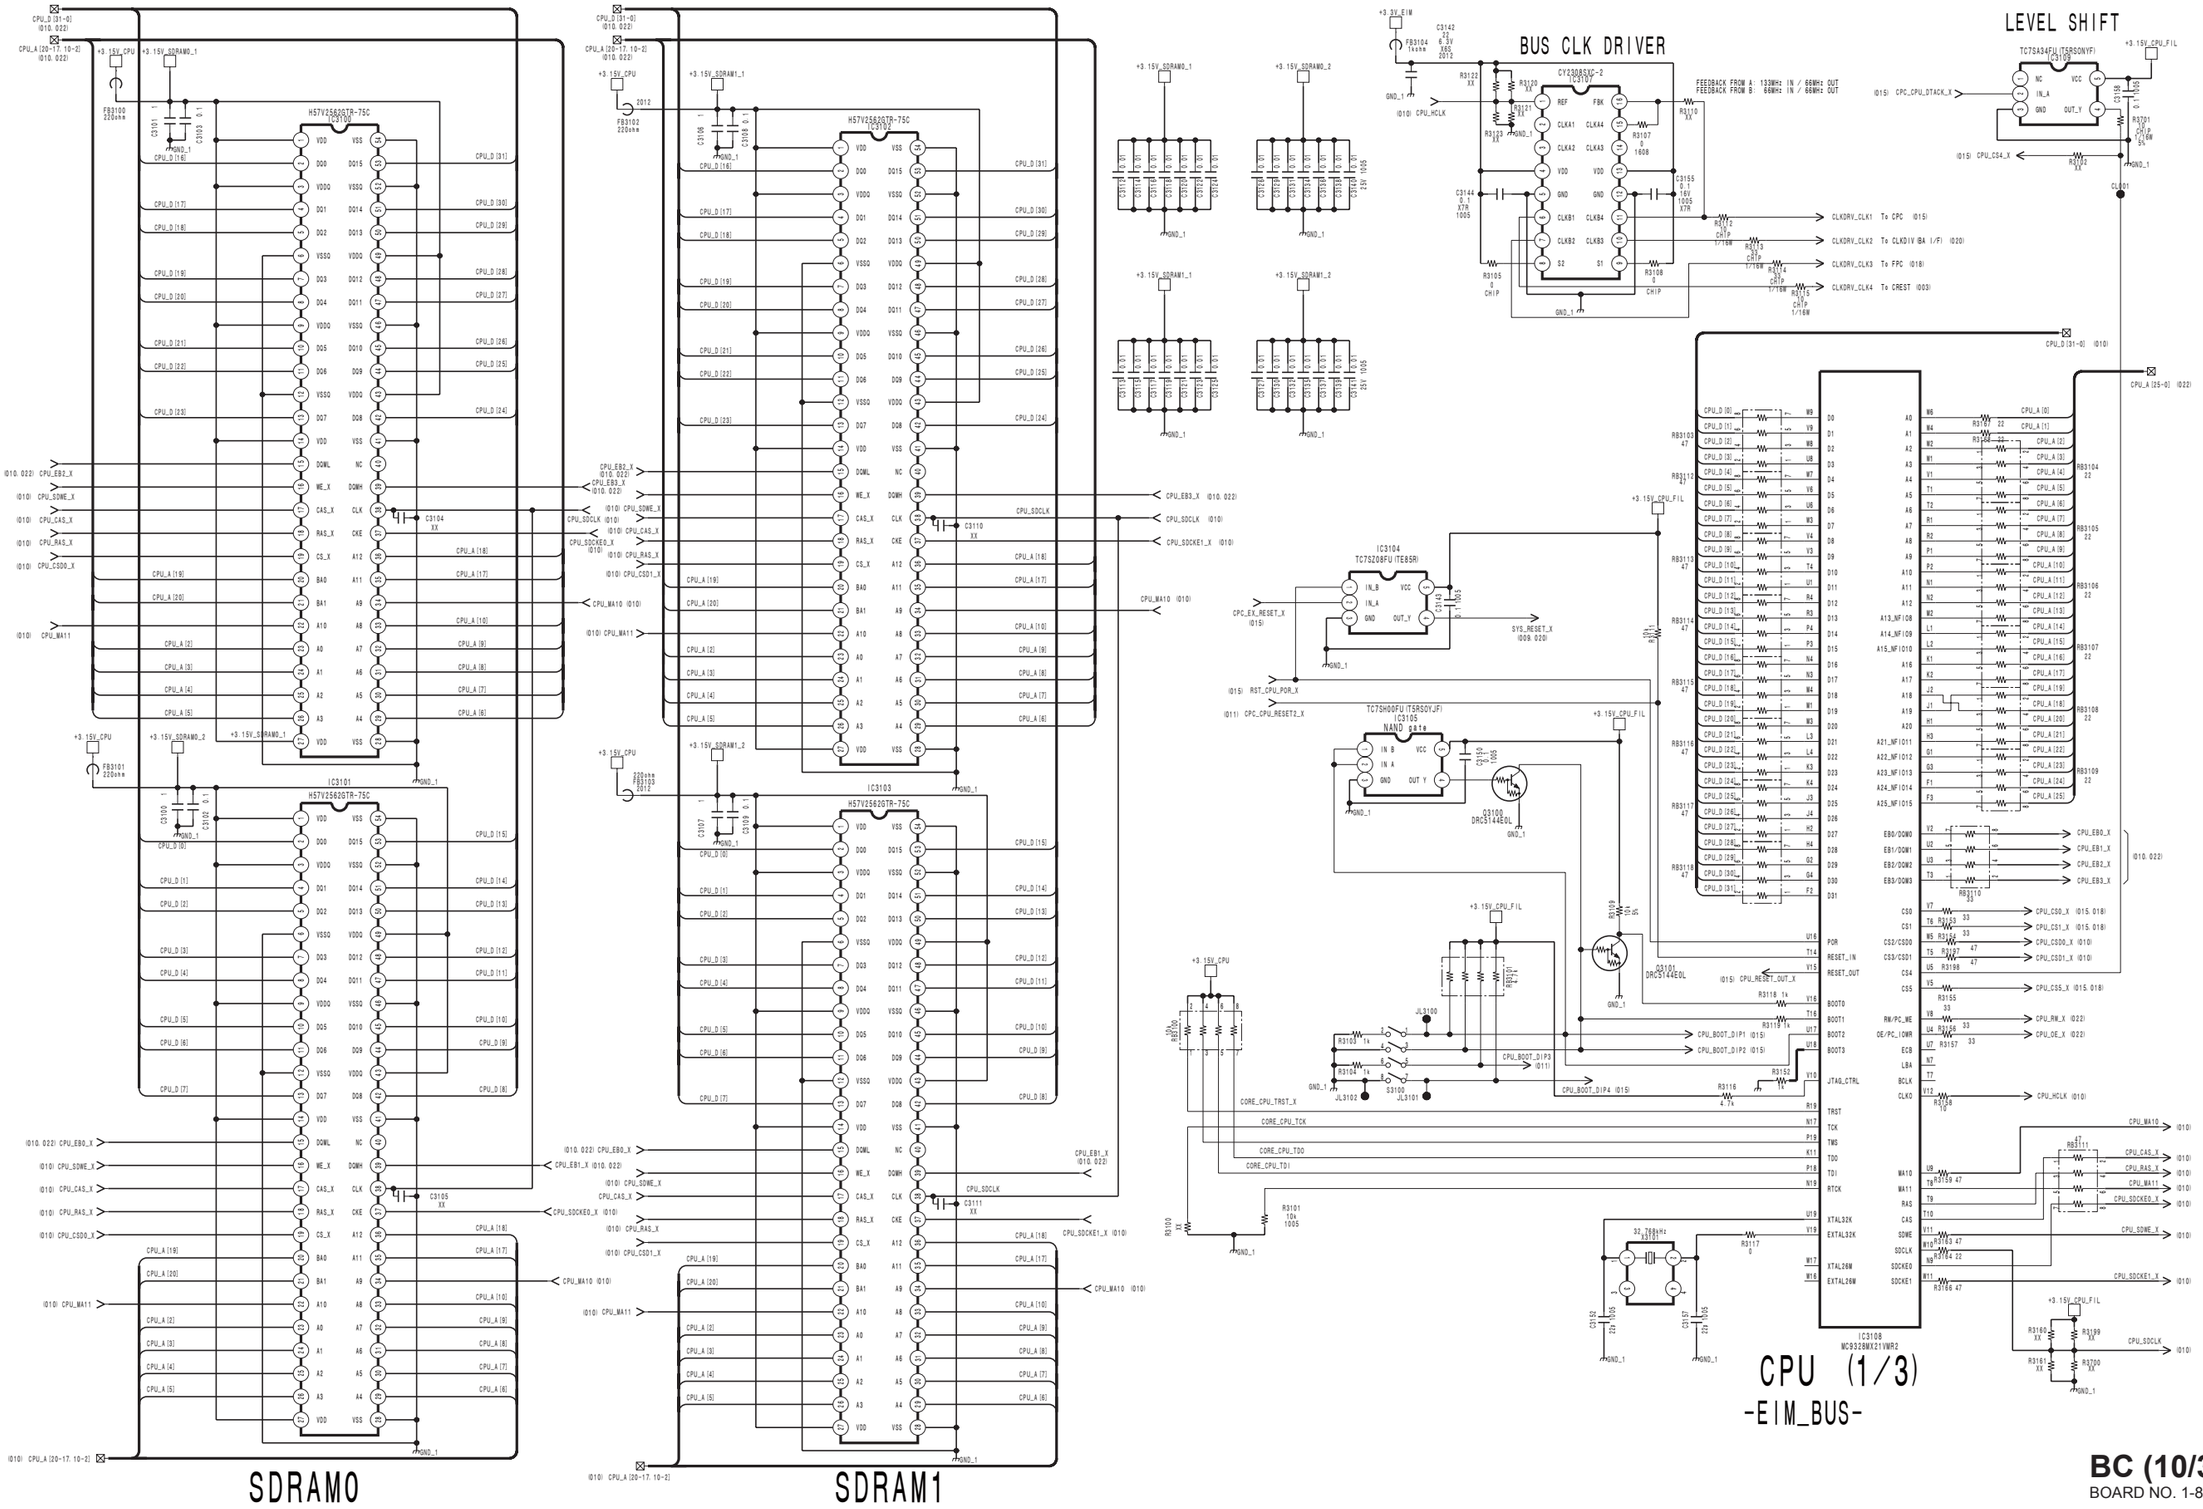


PVM-1741


7-11 7-11

BC (10/33)
BOARD NO. 1-884-396-12

UART1/JTAG
for Debug and TC V / EPR2

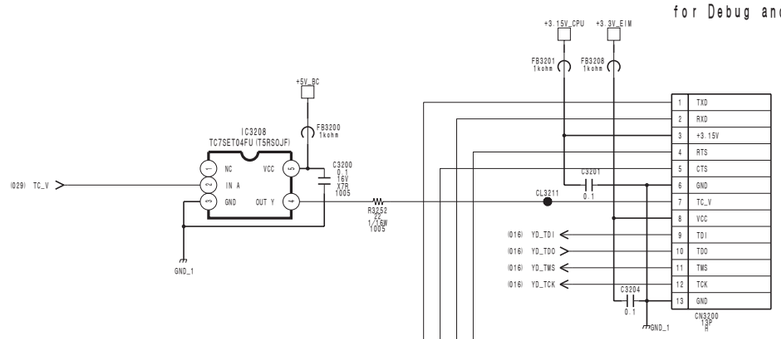


To YD Board

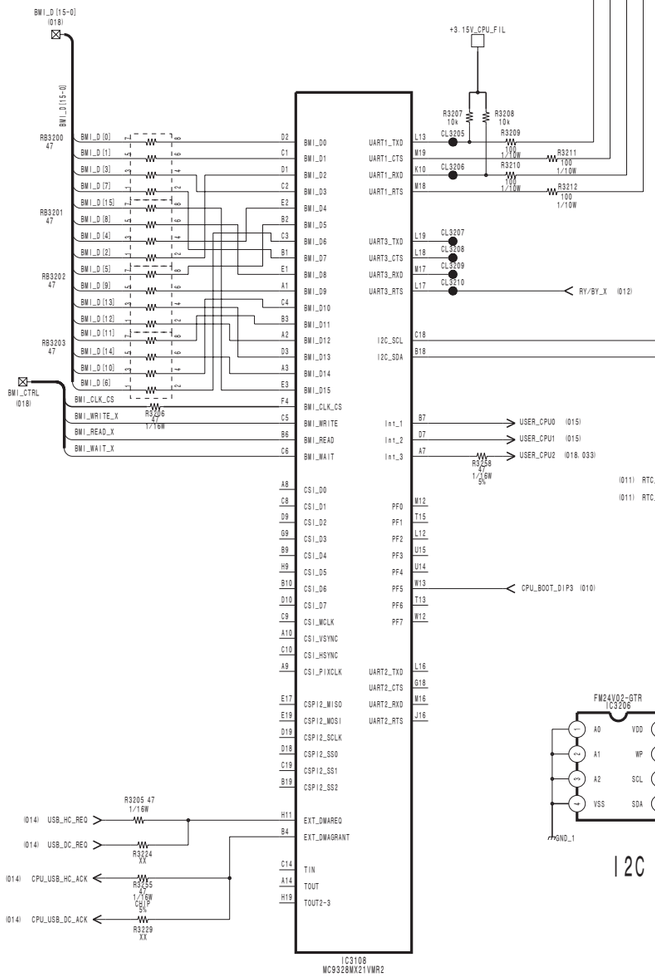


CPU (2/3)
-IF-

REAL TIME CLOCK

RTC Vcc

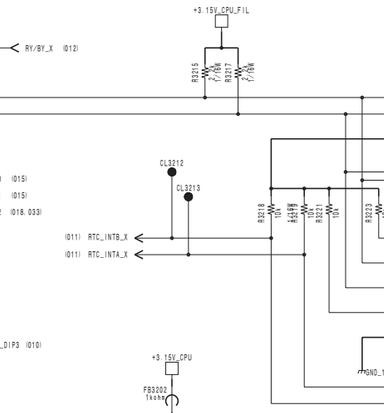


LEVEL SHIFT

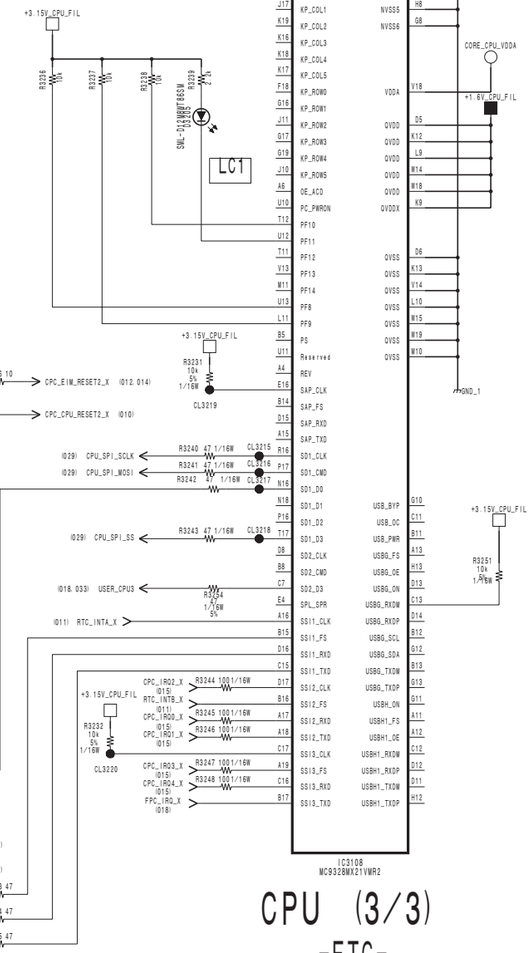


CPU (3/3)
-ETC-

BC (11/33)
BOARD NO. 1-884-396-12

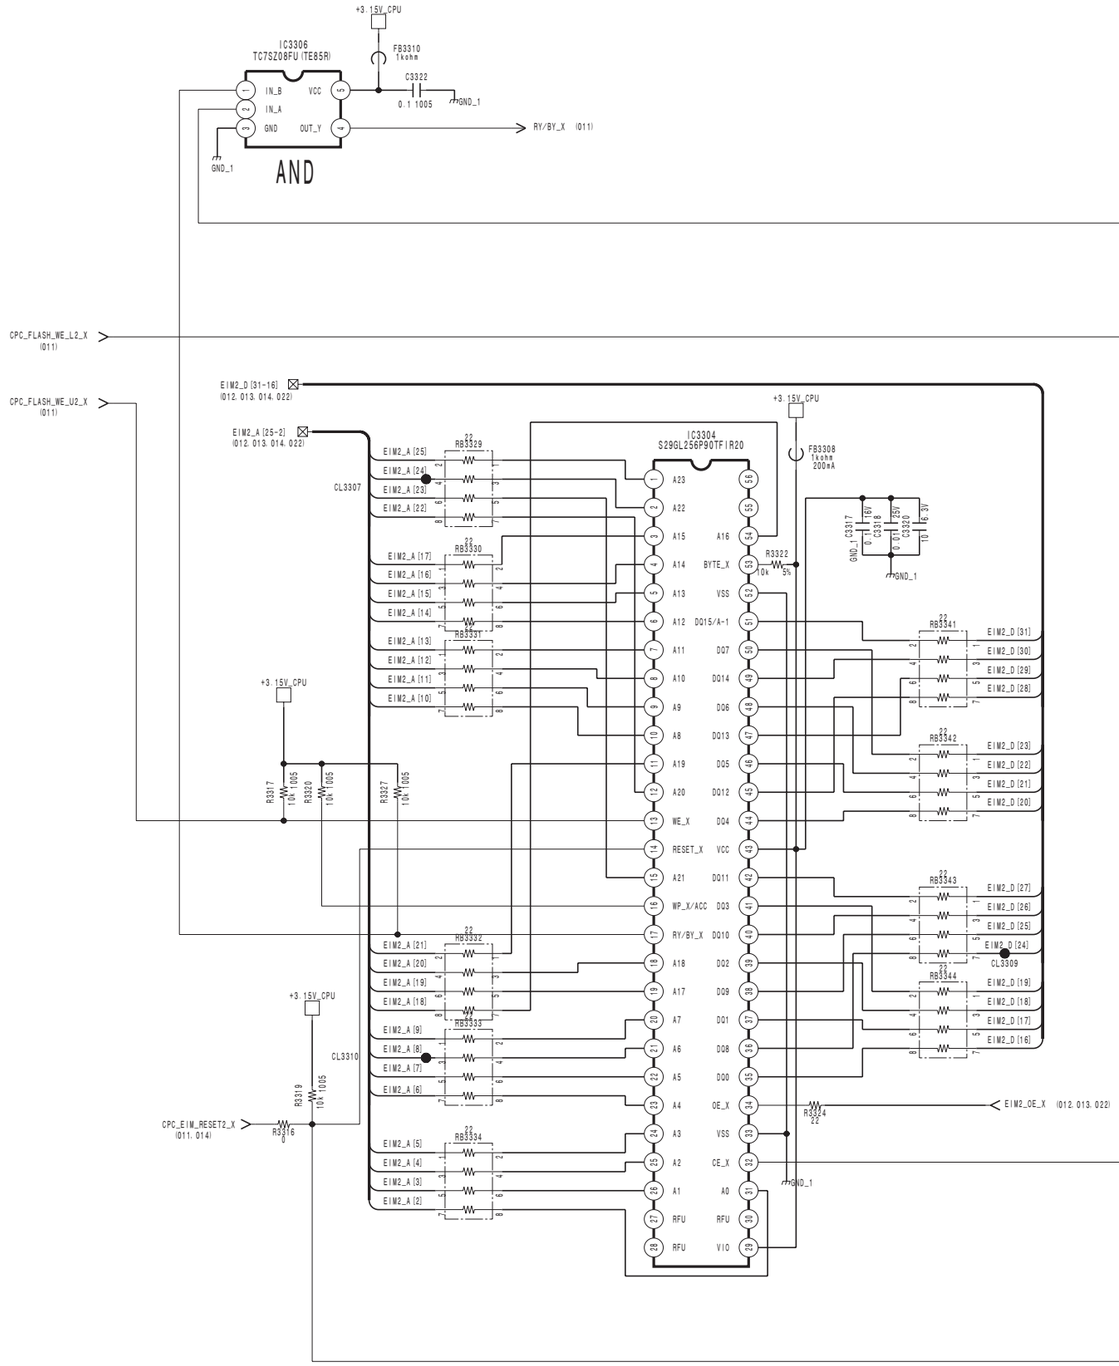


BC (12/33)
BOARD NO. 1-884-396-12

BC (13/33)
SUFFIX: -12

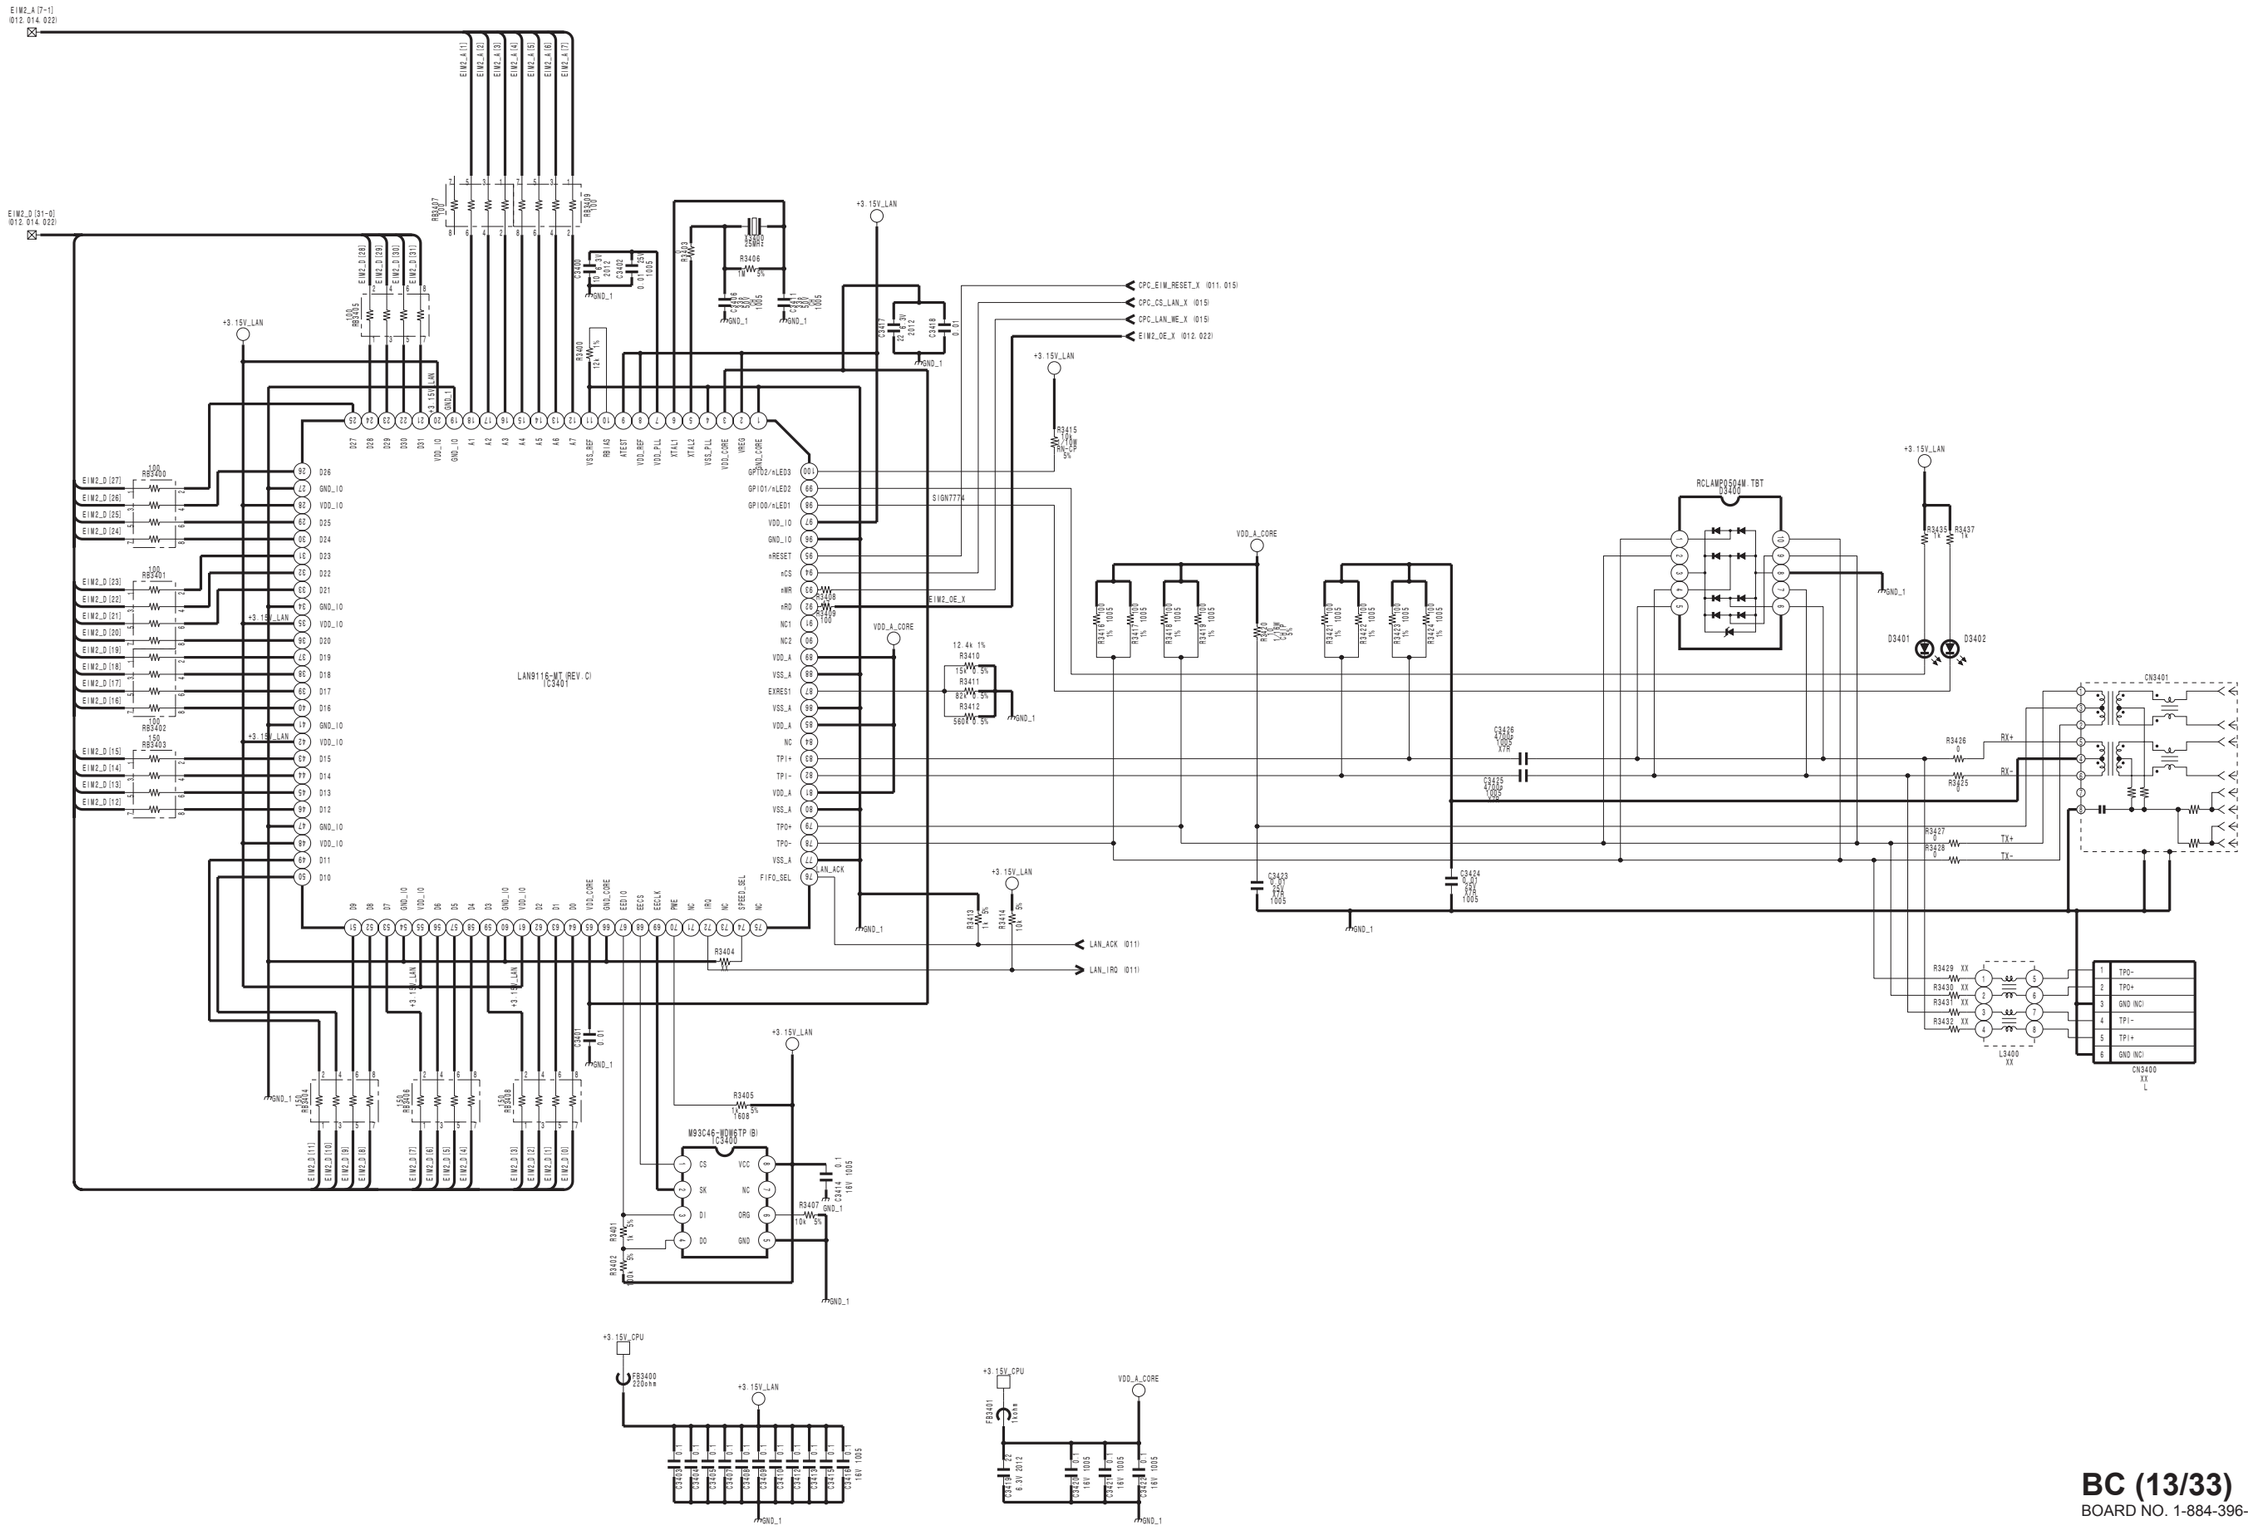



7-14


BC (13/33)
BOARD NO. 1-884-396-12

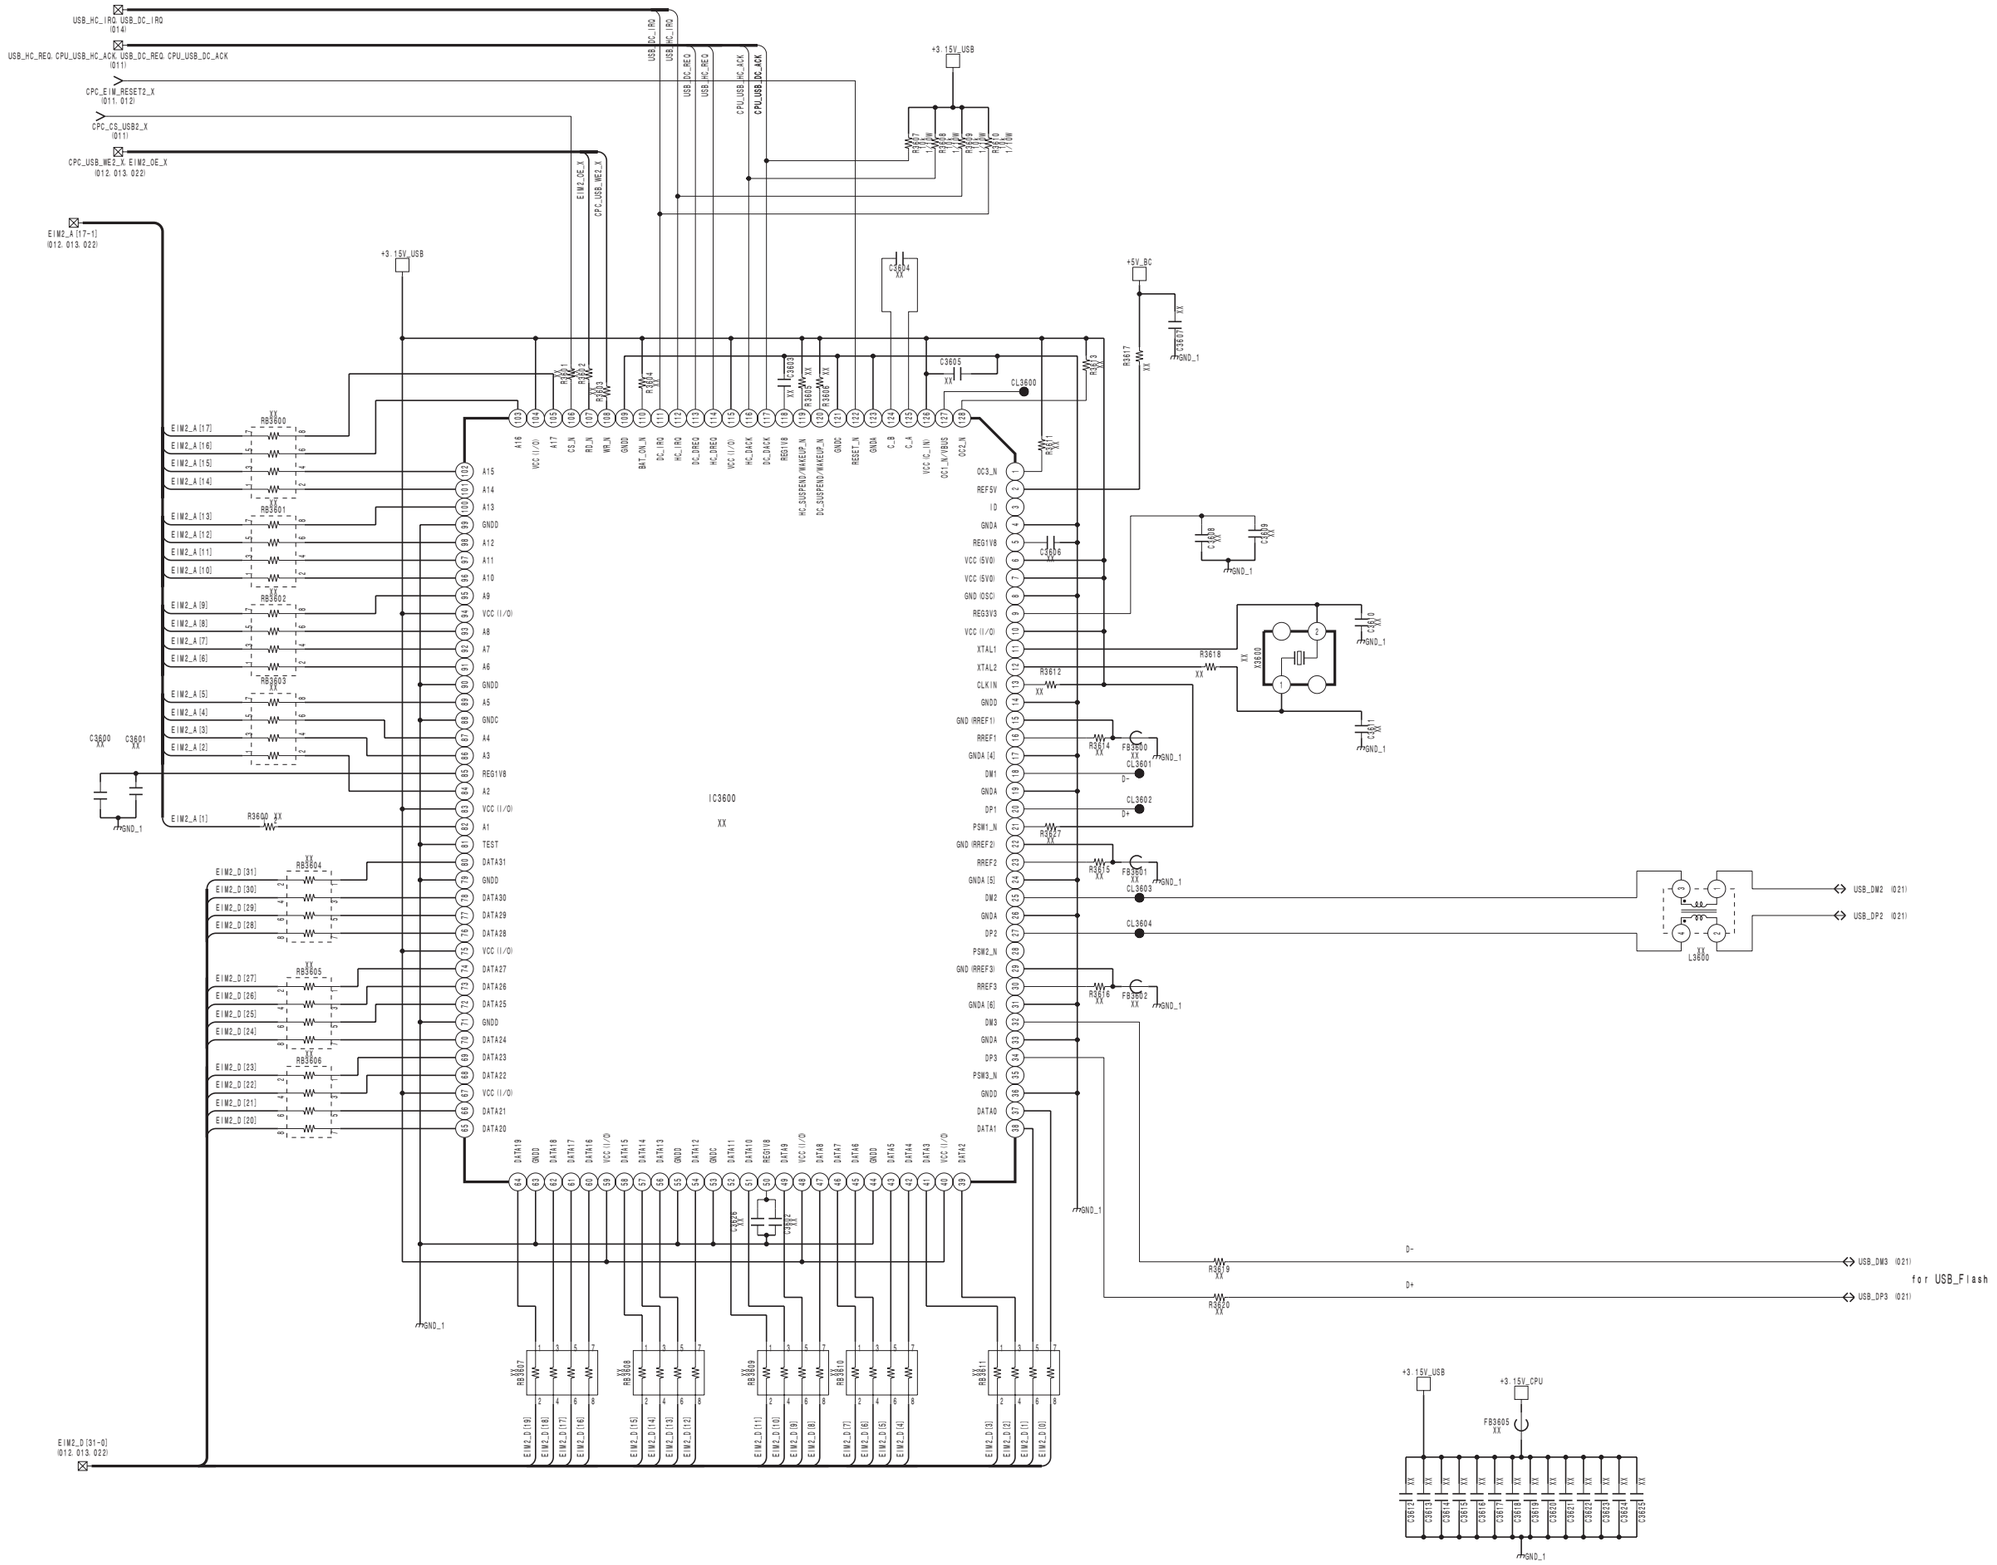
USB_HC_IRQ, USB_DC_IRQ (I014)
USB_HC_REQ, CPU_USB_HC_ACK, USB_DC_REQ, CPU_USB_DC_ACK (I011)
CPC_EIW_RESET2_X (I011, I012)
CPC_CS_USB2_X (I011)
CPC_USB_WE2_X, EIW2_OE_X (I012, I013, I022)
EIW2_A [17-1] (I012, I013, I022)
+3.15V_USB
+5V_BC
IC3600
XX
GND_1
USB_DM2 (I021)
USB_DP2 (I021)
USB_DM3 (I021)
USB_DP3 (I021)
for USB_Flash
EIW2_D [31-0] (I012, I013, I022)

BC (15/33) **SUFFIX: -12**

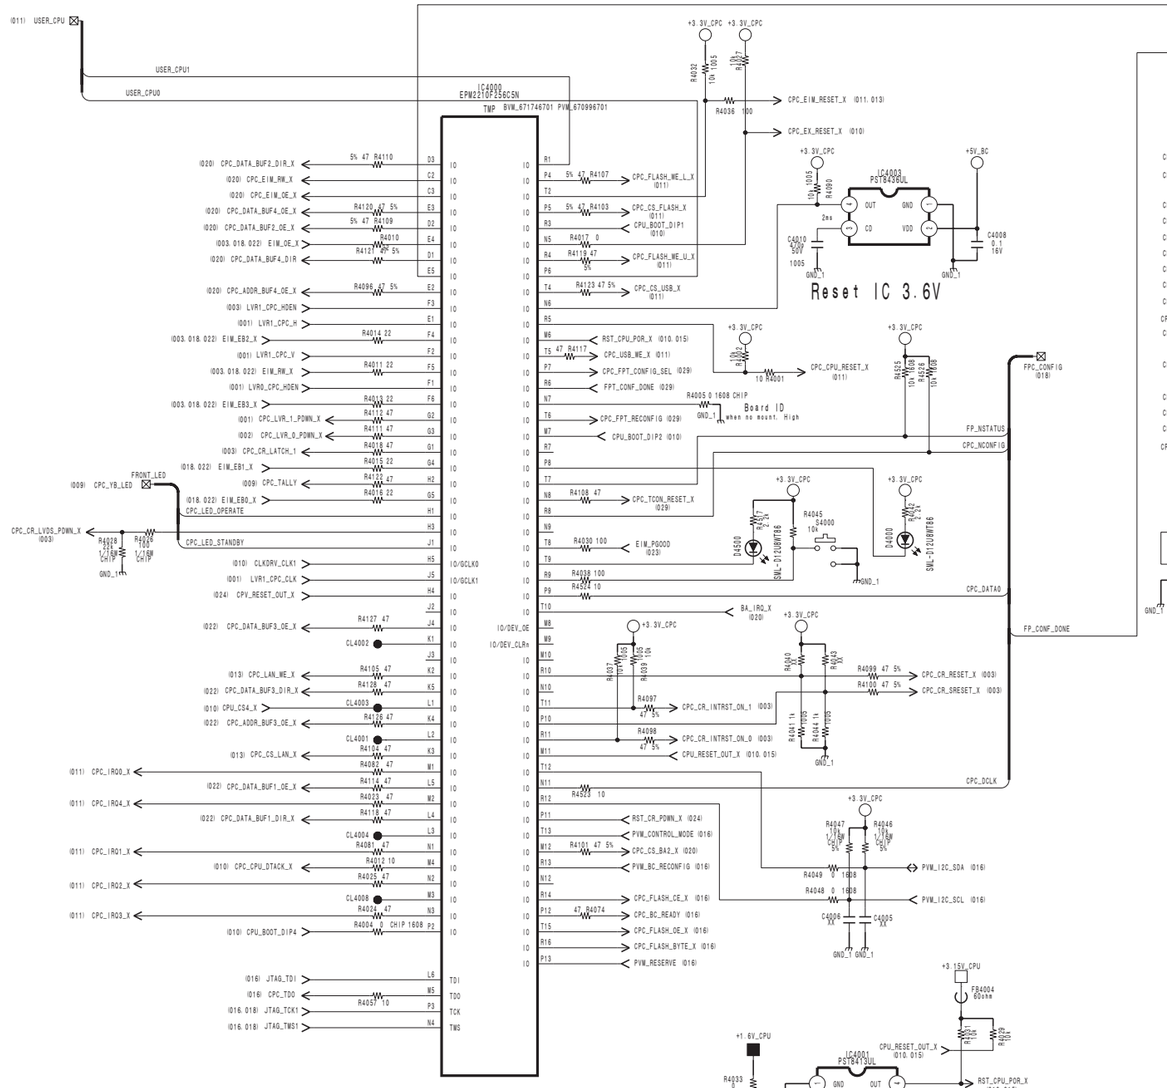


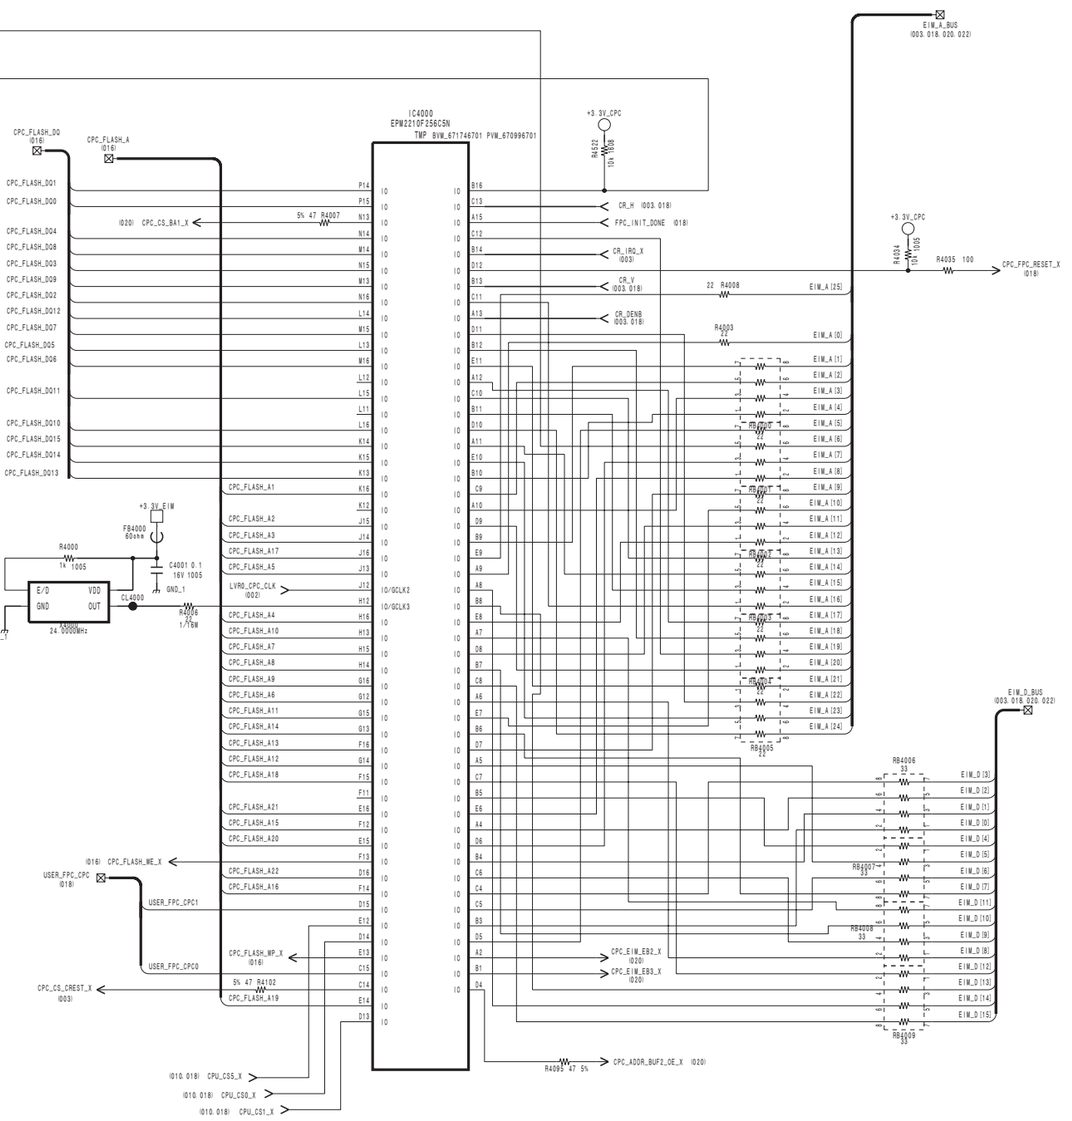

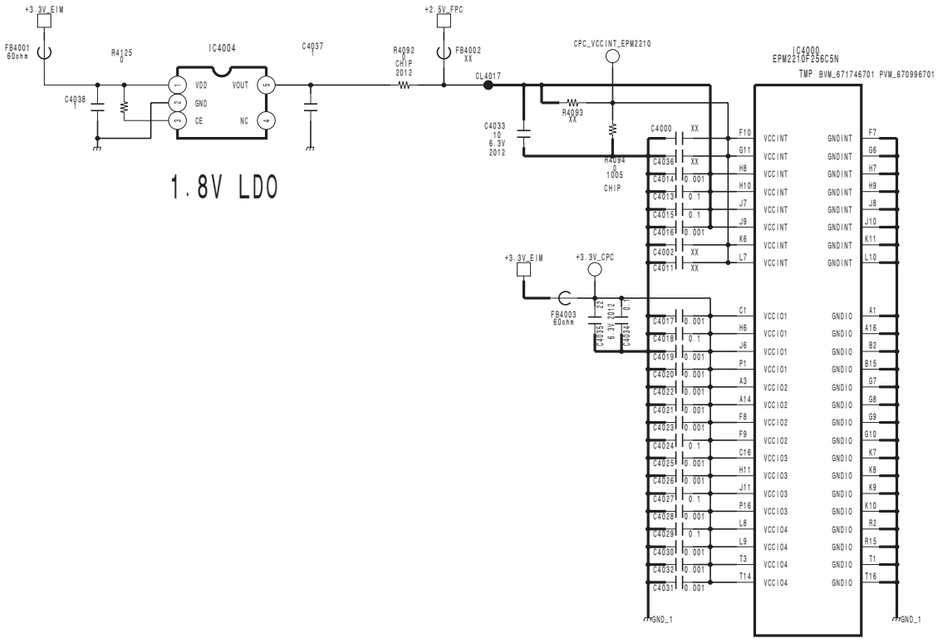


1.8V LDO

CPLD_CORE (3/3)
-POWER-

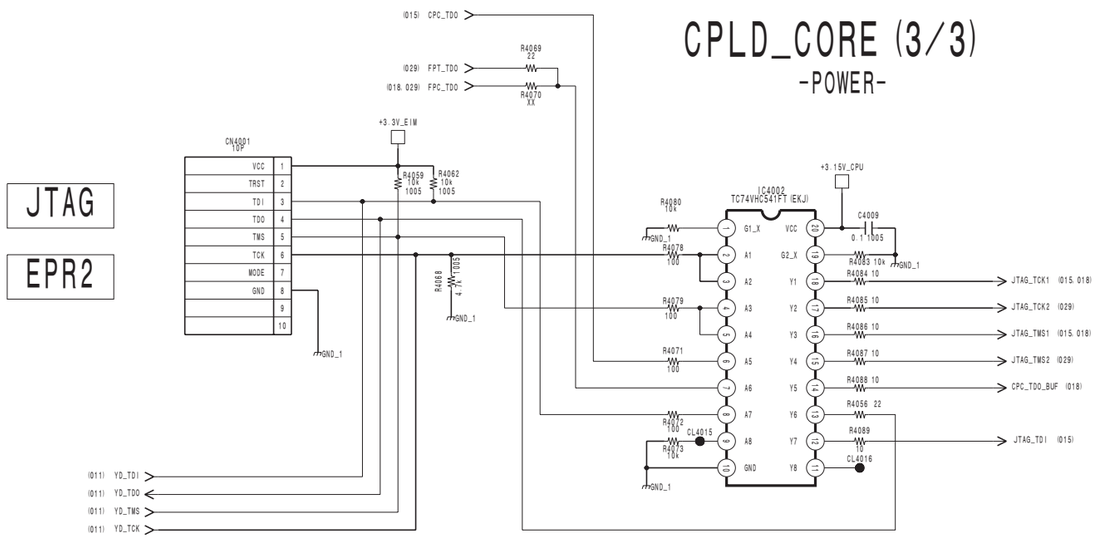


JTAG

EPR2

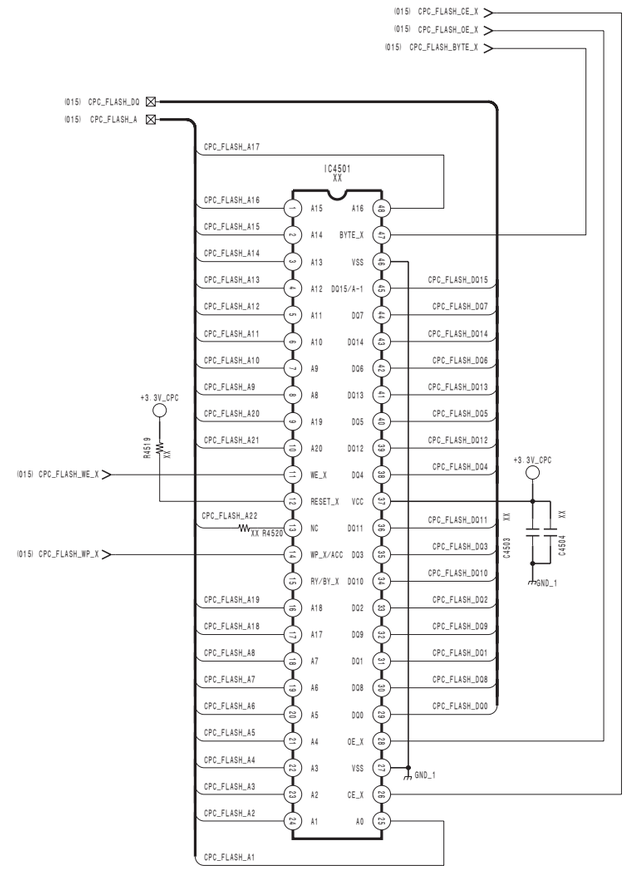


FLASH config

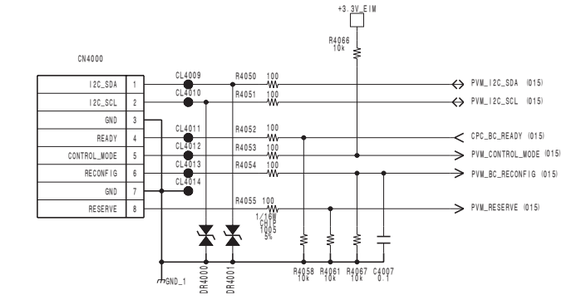

I2C for PVM


BC (16/33)
BOARD NO. 1-884-396-12

BC (17/33)
SUFFIX: -12

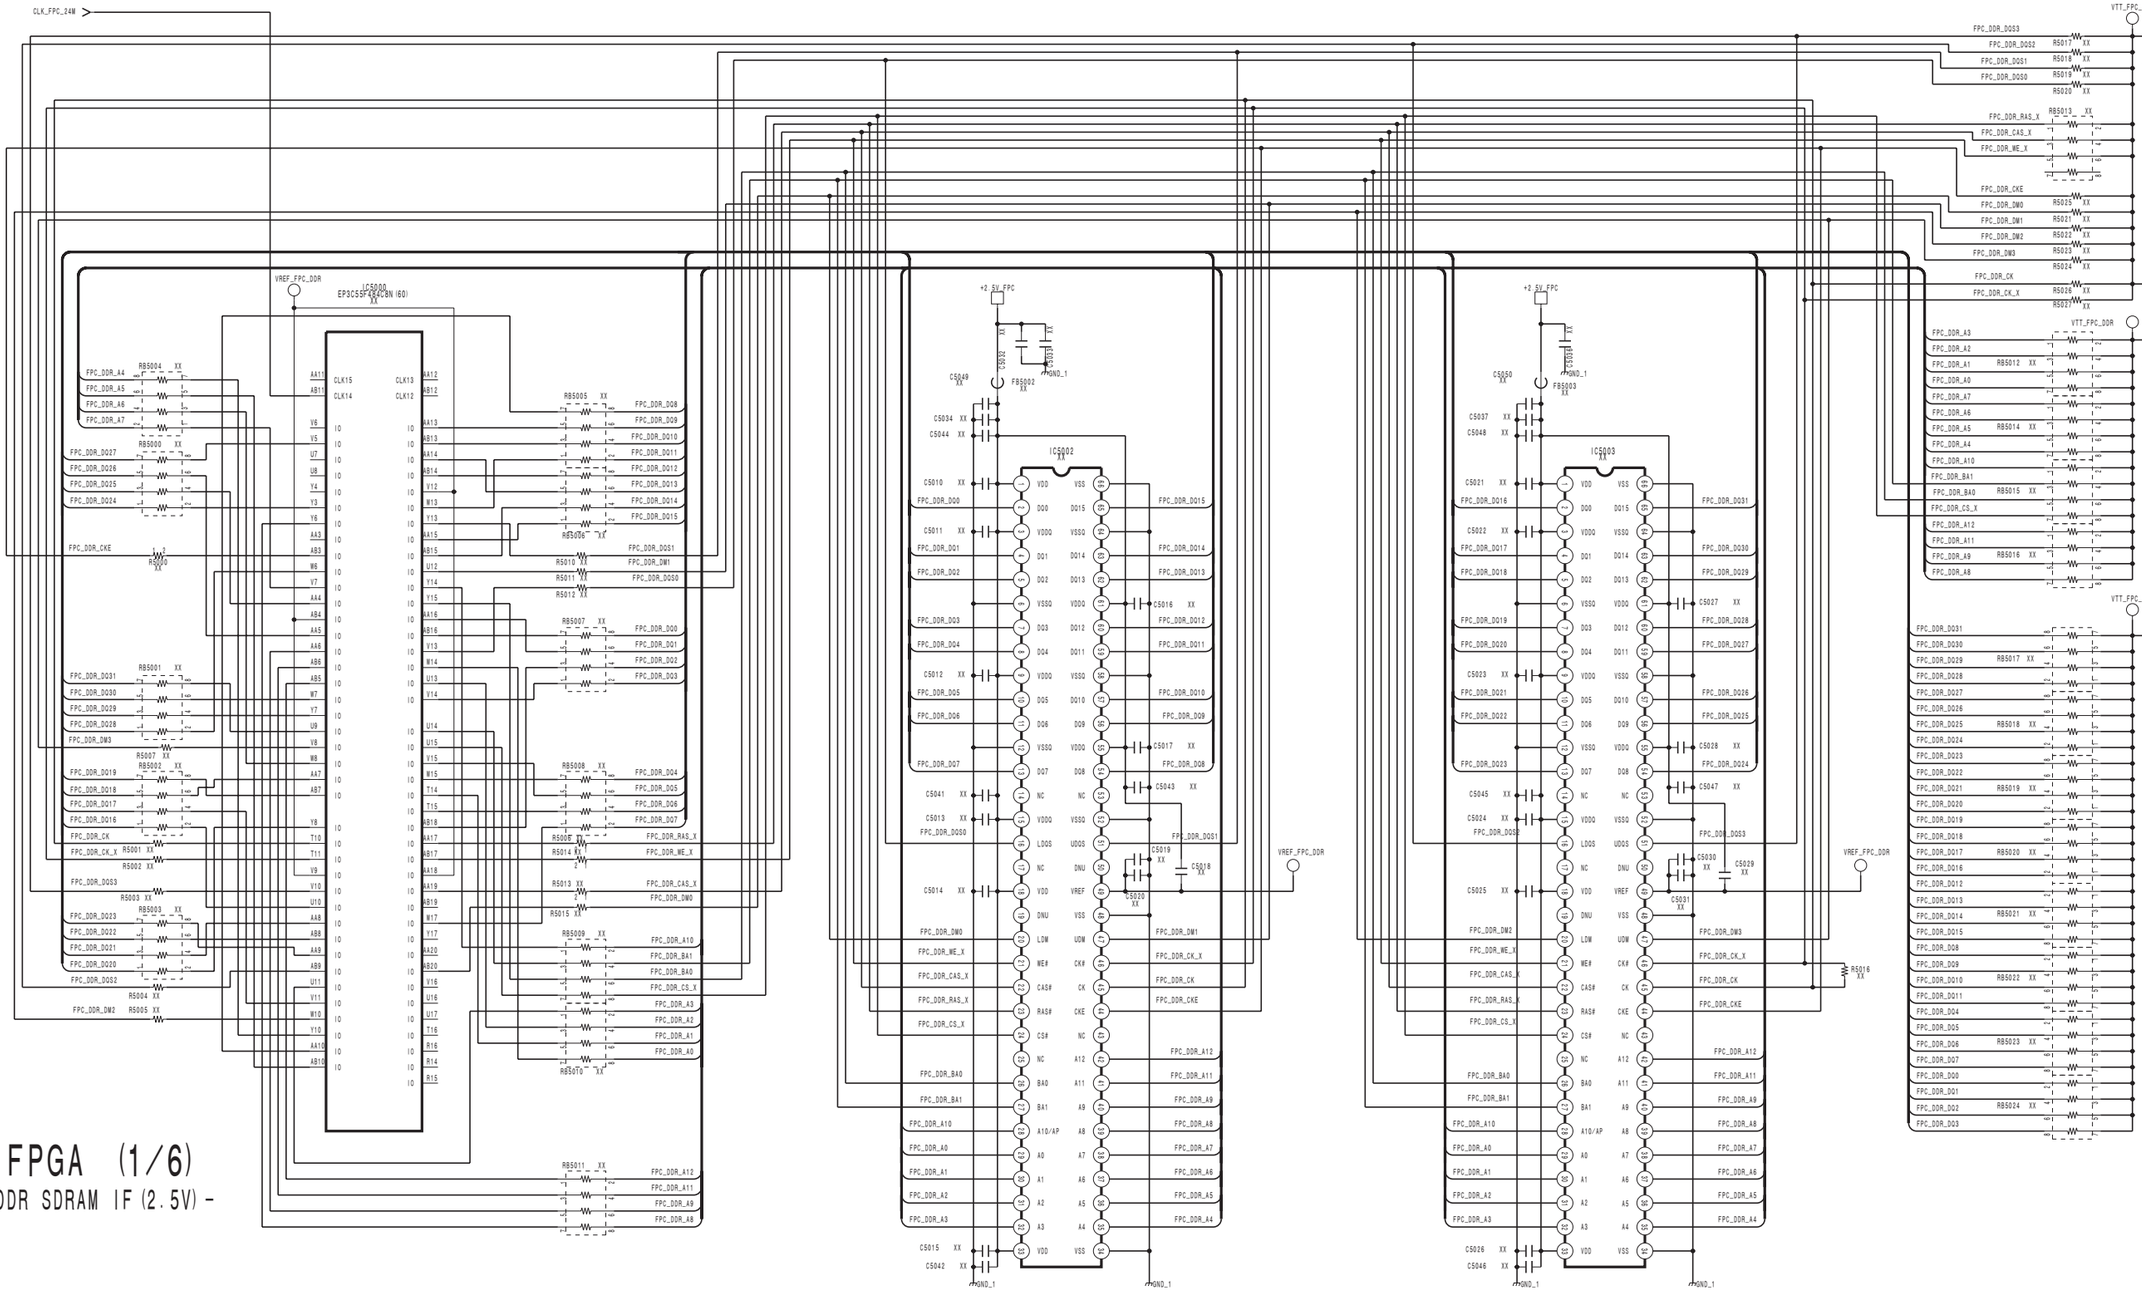

FPGA (1/6)
-DDR SDRAM IF (2.5V) -


DDR SDRAM

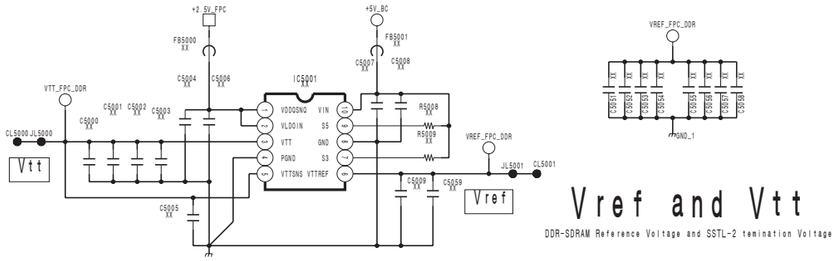

Vref and Vtt
DDR-SDRAM Reference Voltage and SSTL-2 termination Voltage

7-18

BC (17/33)
BOARD NO. 1-884-396-12

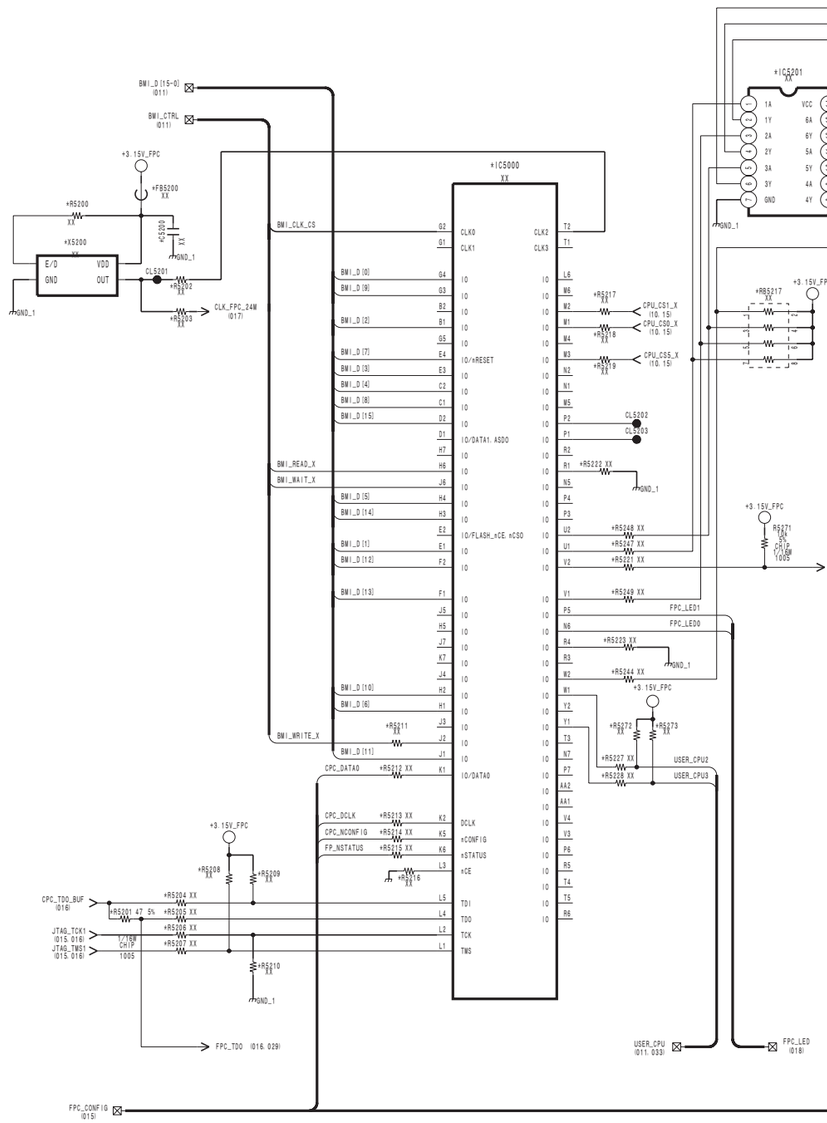


FPGA (2/6)
-CPU IF (3.15V)-

FPGA (3/6)
-CREST IF (3.3V)-


FPGA (4/6)
-EIM BUS IF (3.3V)-

BC (18/33)
BOARD NO. 1-884-396-12

BC (19/33)
SUFFIX: -12

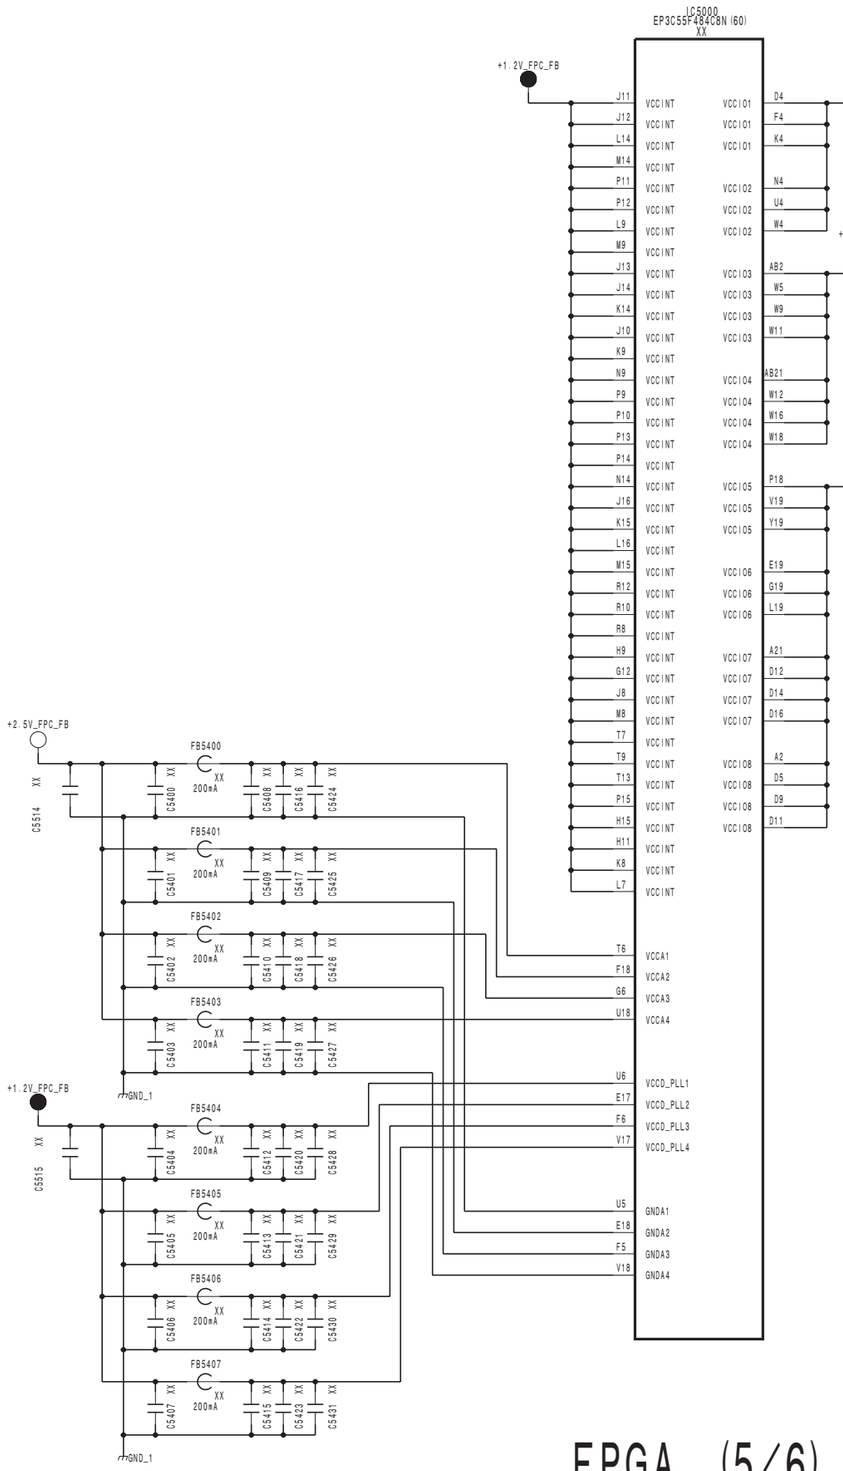

FPGA (5/6)
-Power-

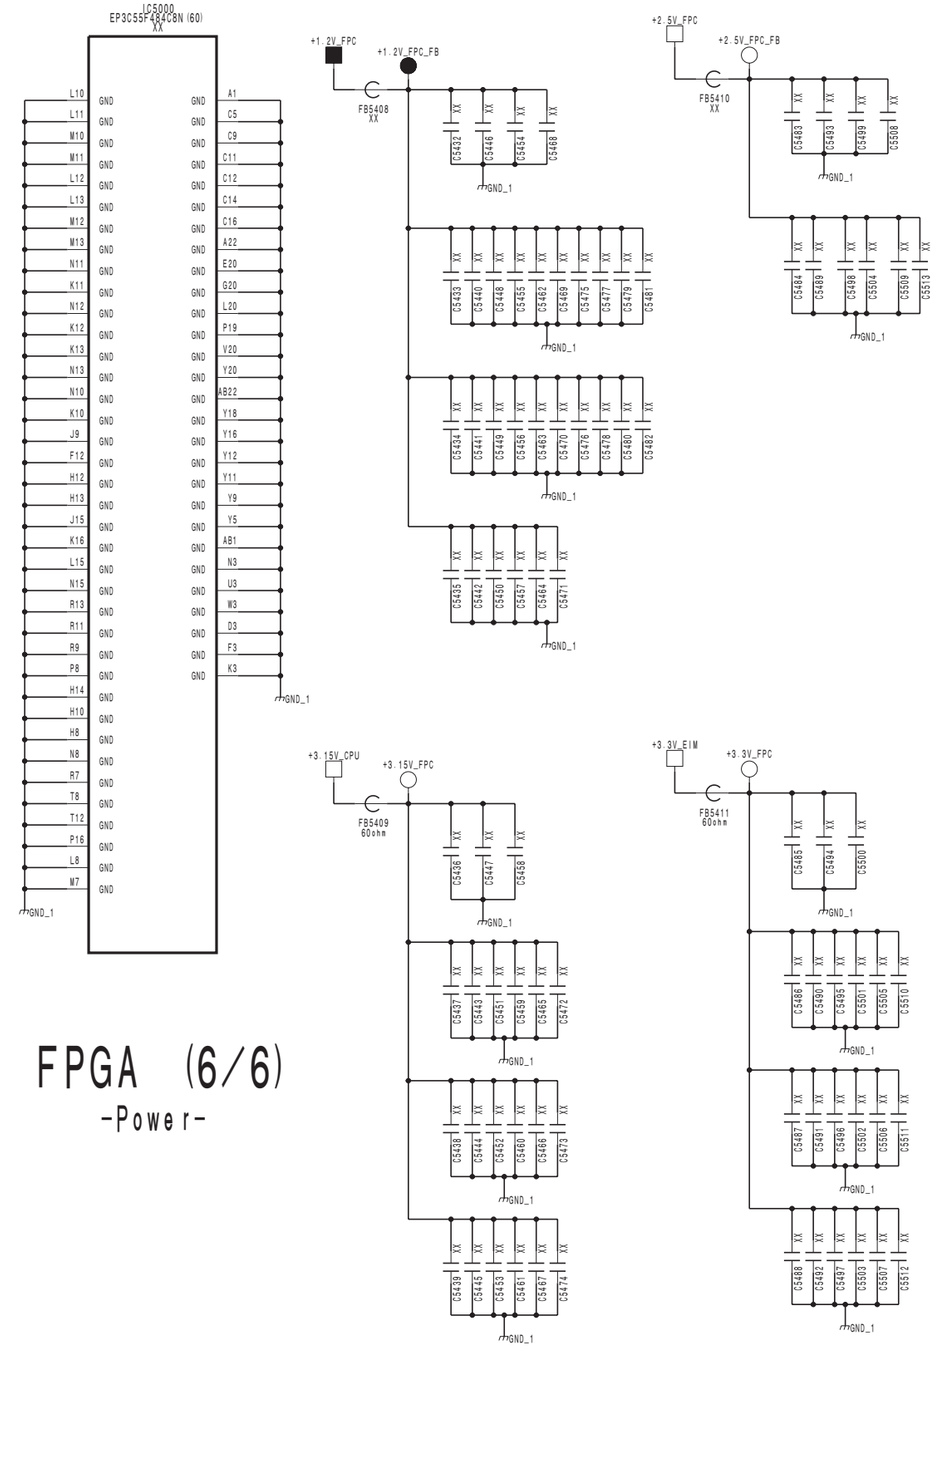



FPGA (6/6)
-Power-

7-20


BC (19/33)
BOARD NO. 1-884-396-12

BA BUS Interface

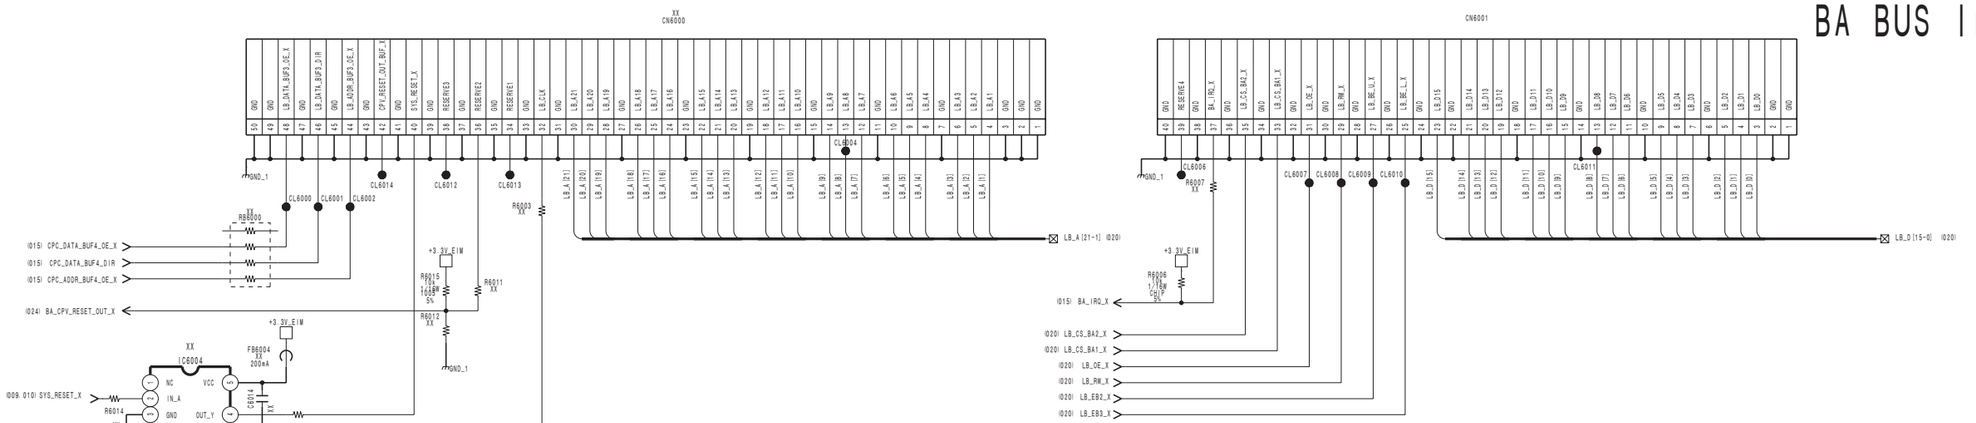

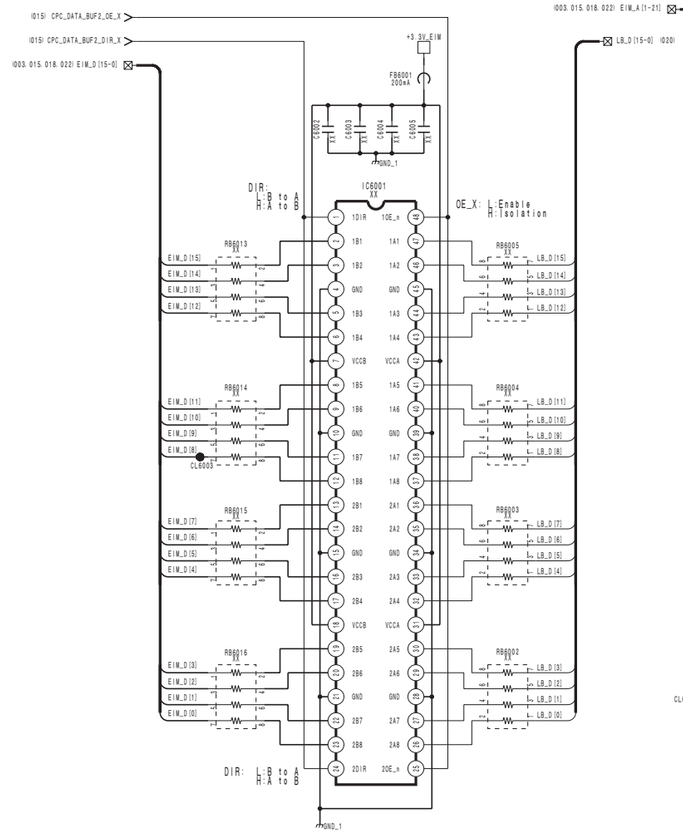

BUS Buffer2 [Data]

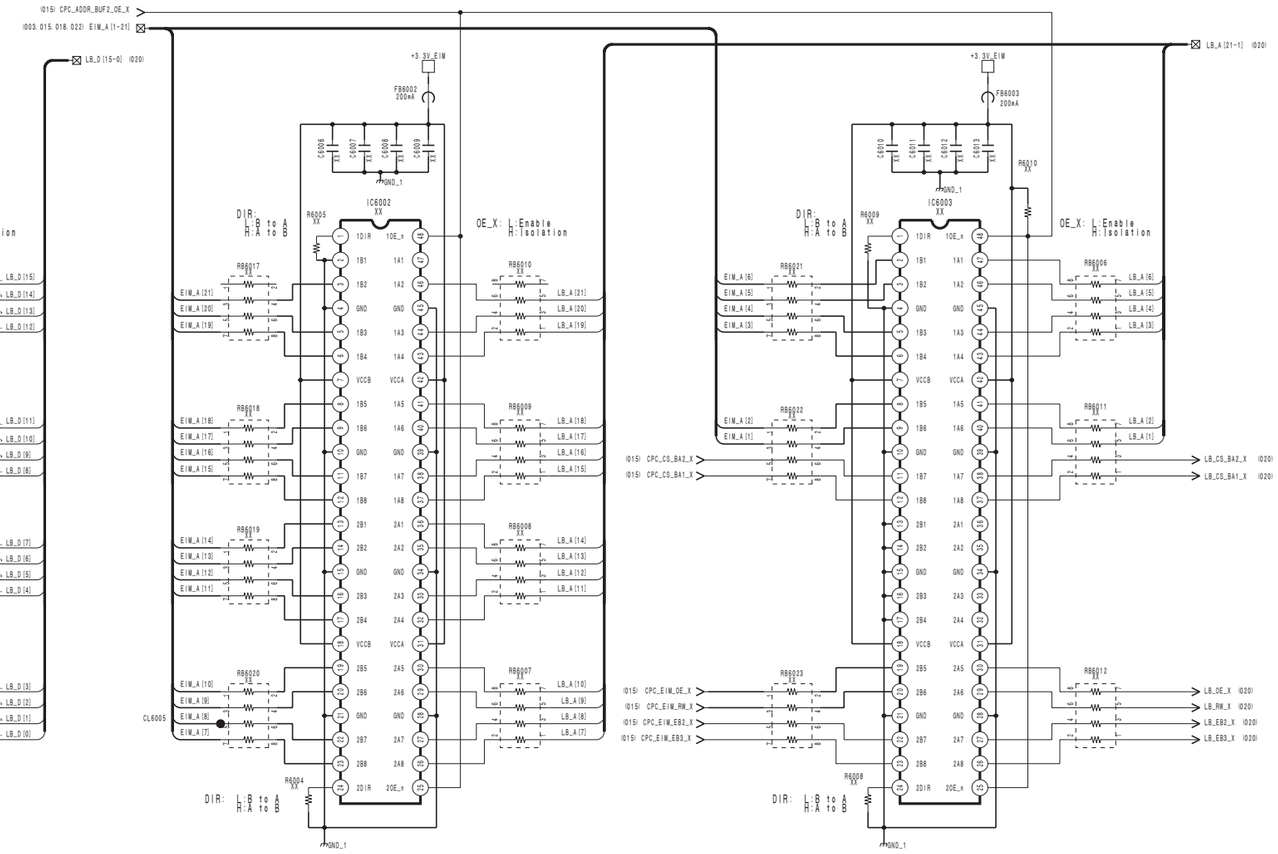

BUS Buffer2 [Address]


BA Bus I/F

BUS Buffer 2

BC (20/33)
BOARD NO. 1-884-396-12

BC (21/33)
SUFFIX: -12


USB type Mini

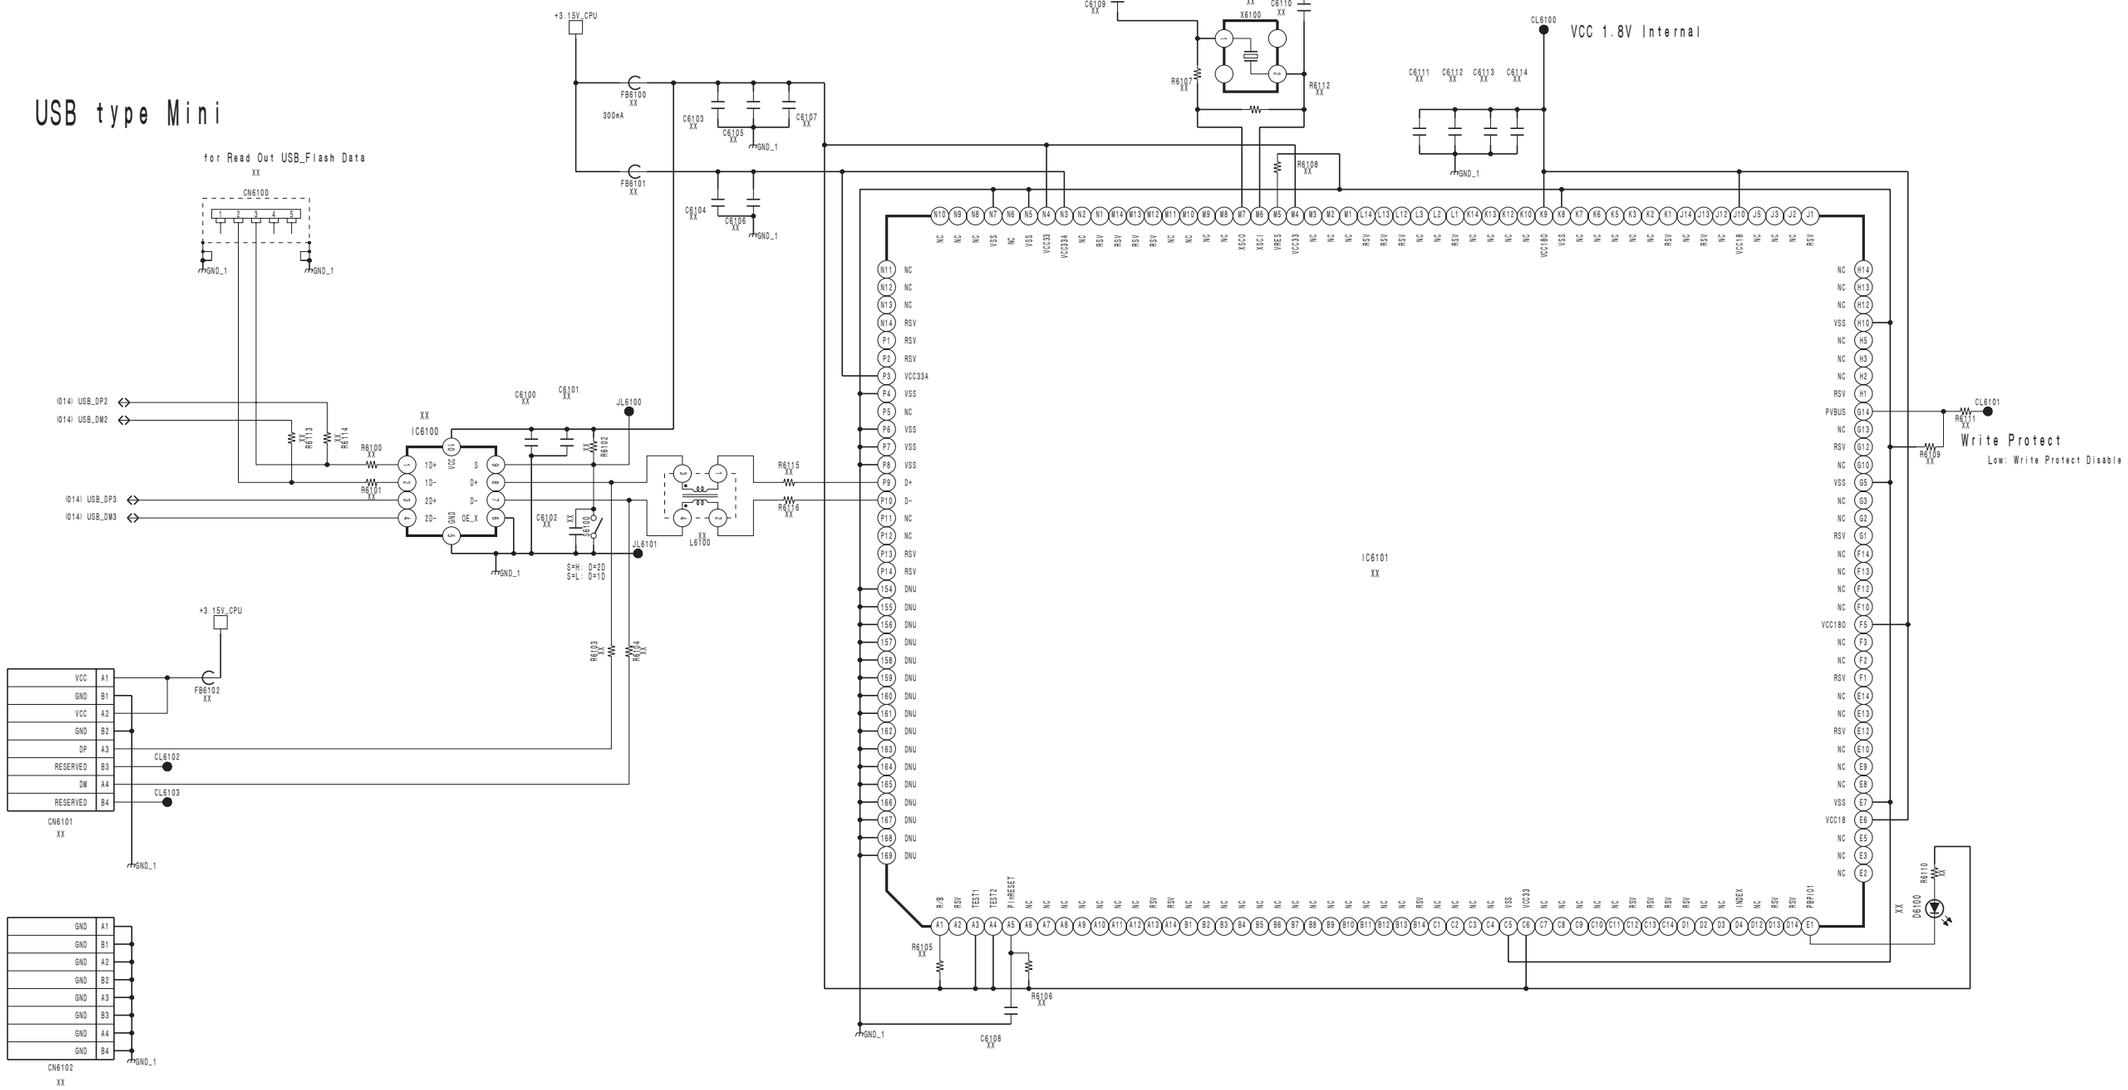



BC (21/33)
BOARD NO. 1-884-396-12


7-22

PVM-1741

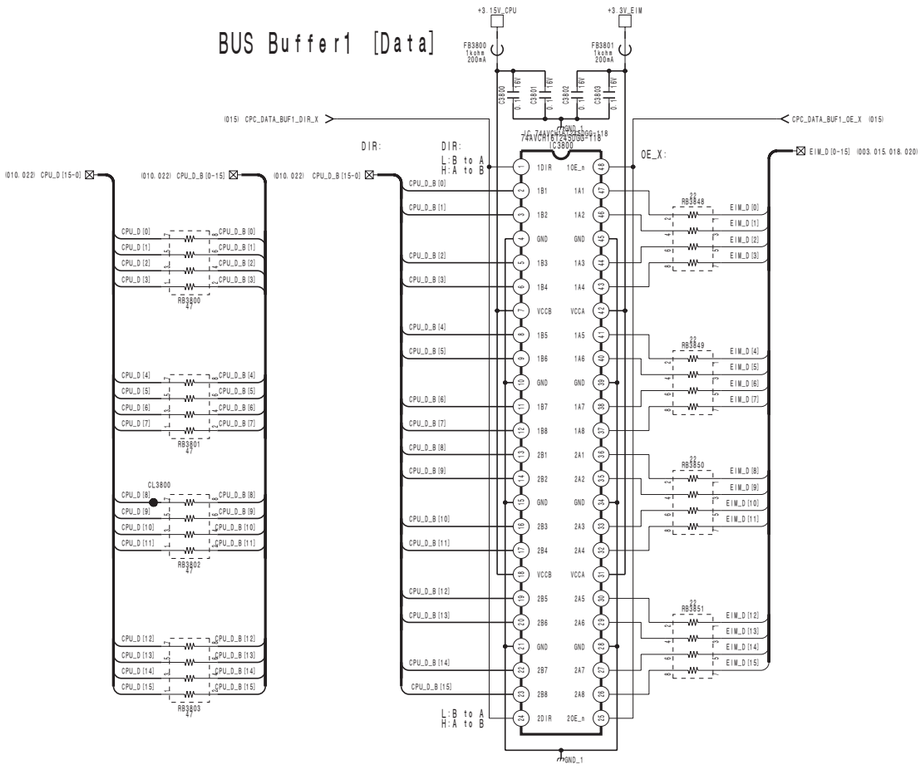

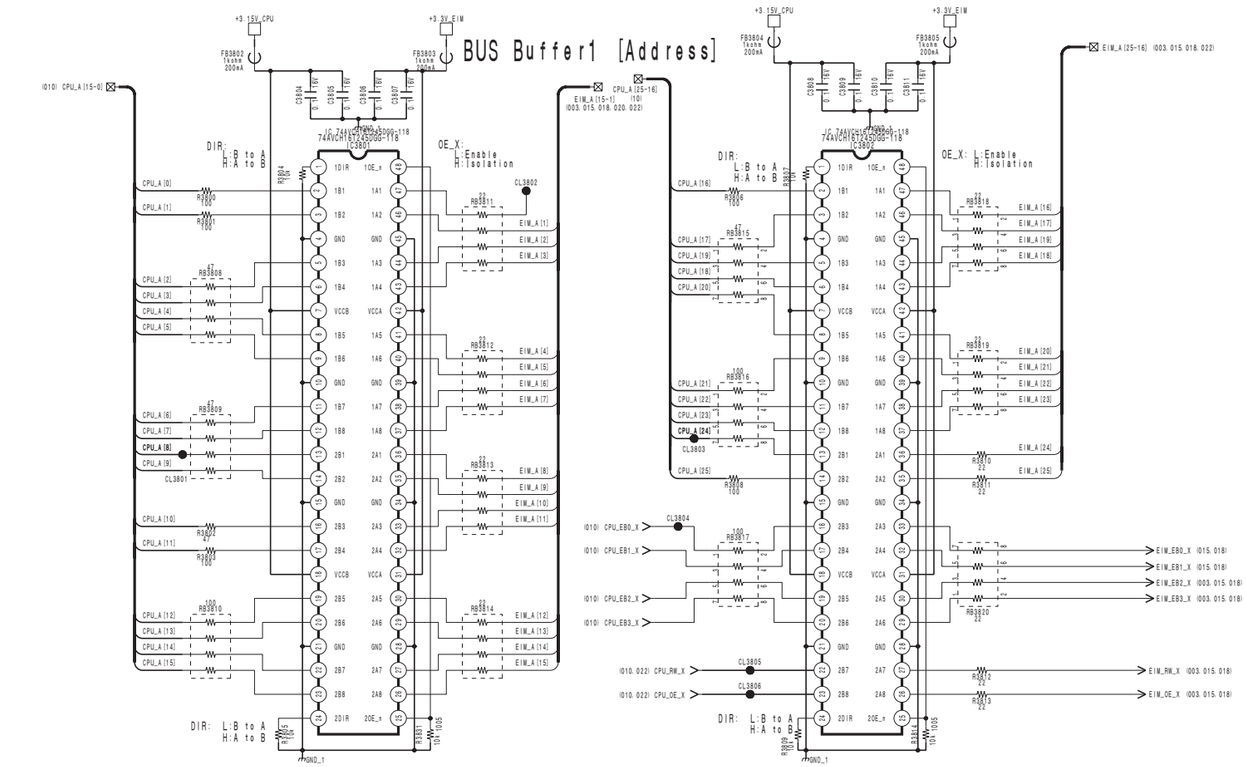

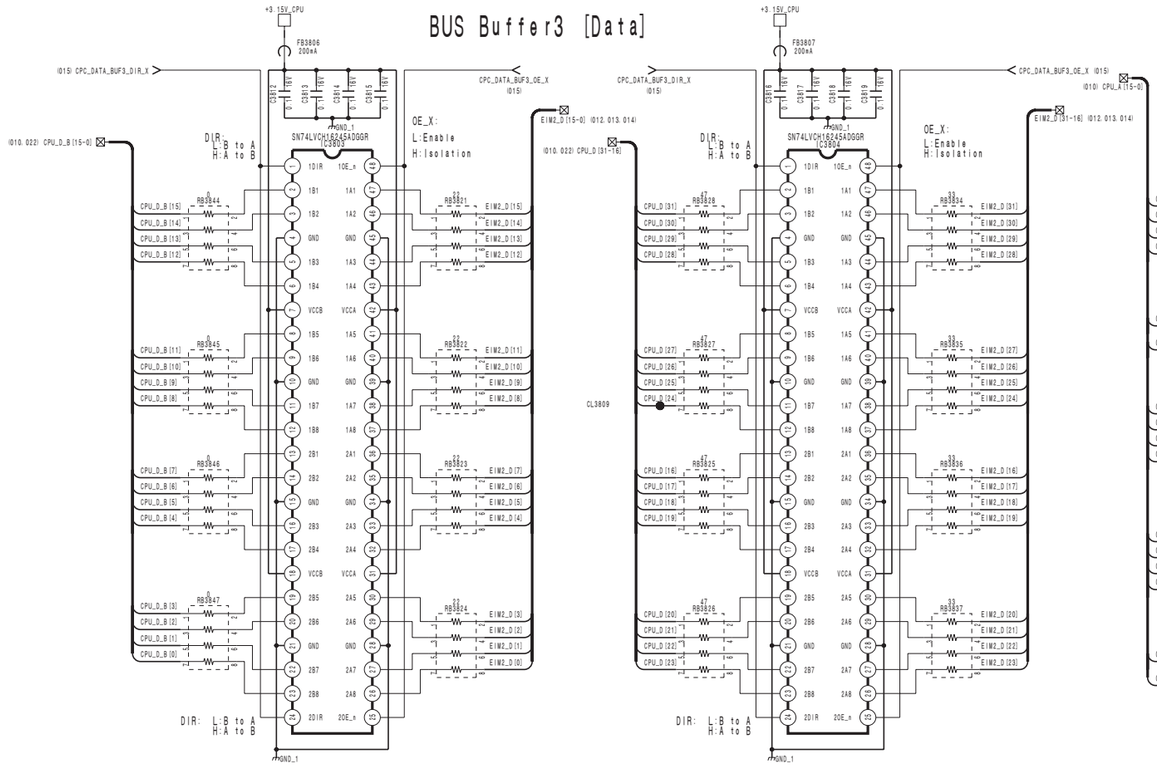


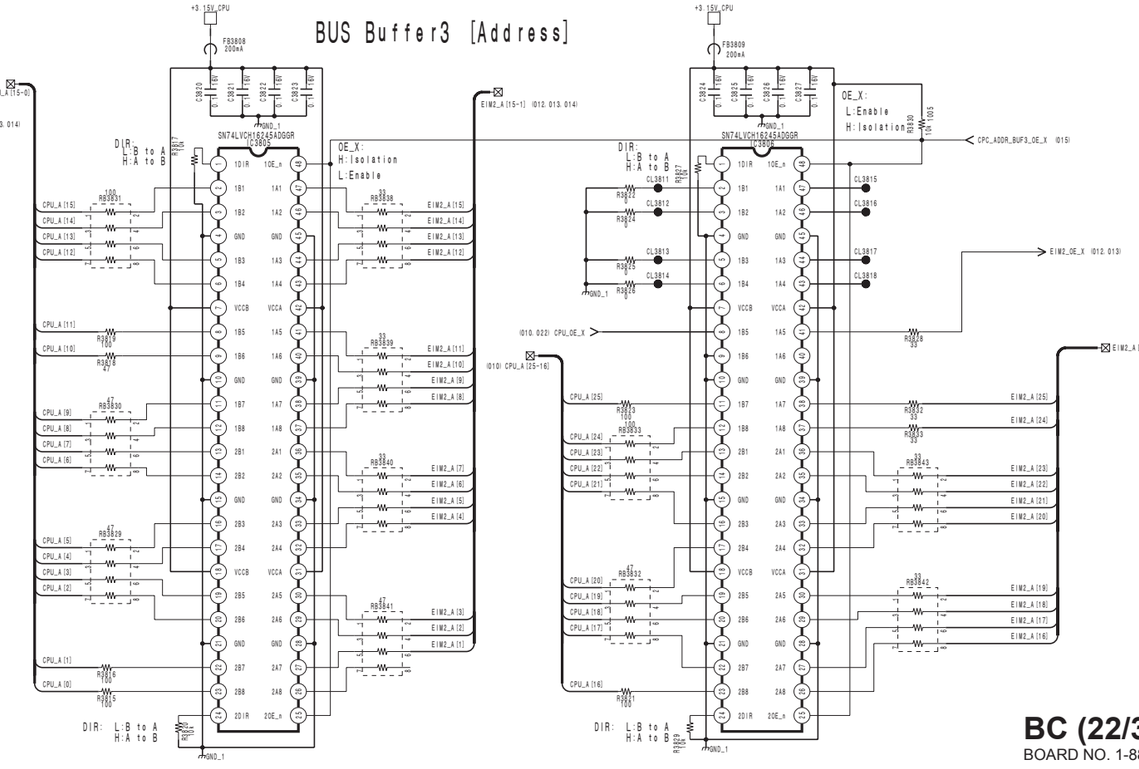


BC (22/33)
BOARD NO. 1-884-396-12

BC (23/33)
SUFFIX: -12


+3.15V_CPU

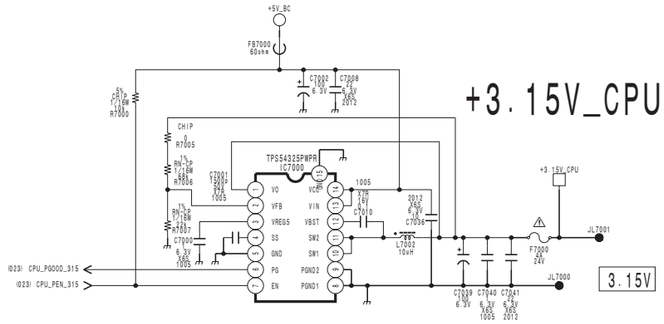

+3.3V_EIM

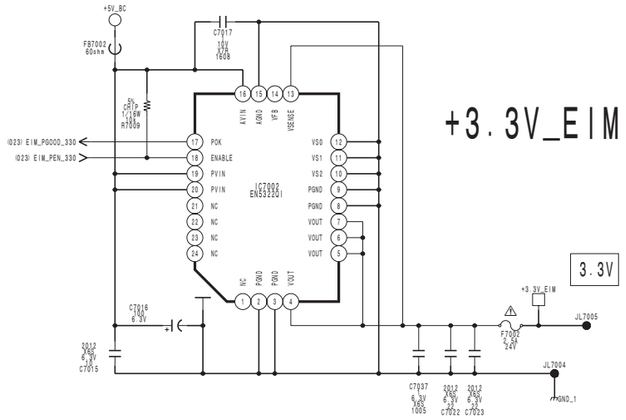


+2.5V_FP

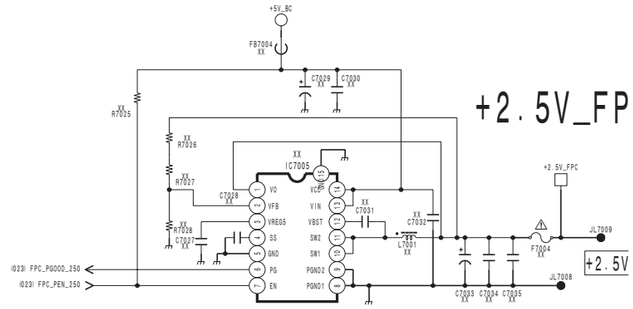


+1.6V_CPU


+1.2V_FPC


Power Fail Detection

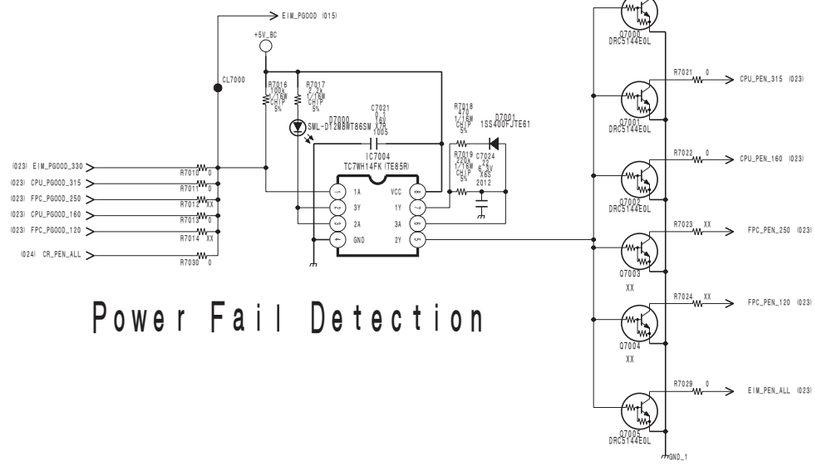






BC (23/33)
BOARD NO. 1-884-396-12

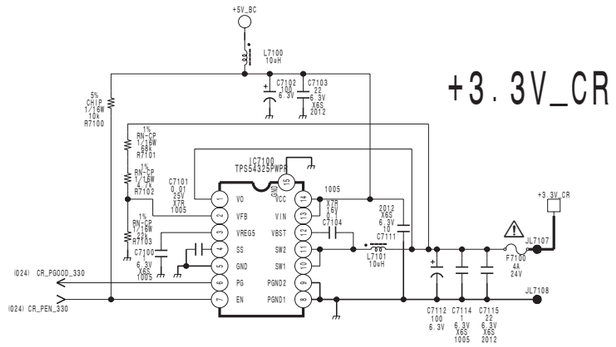


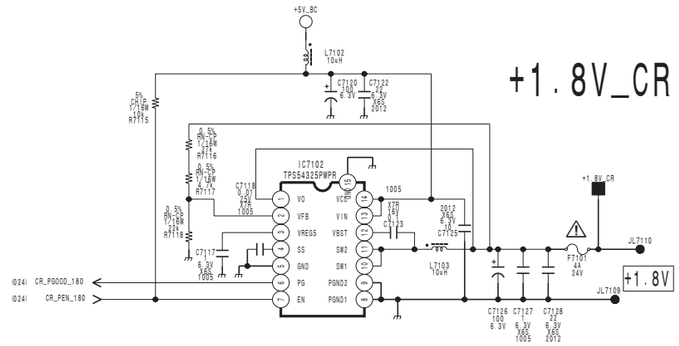

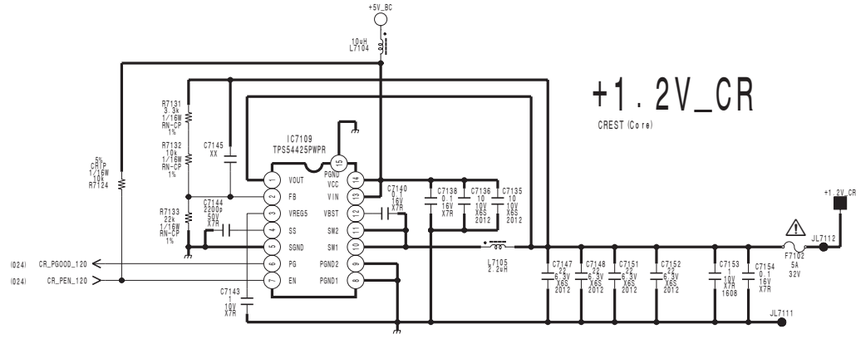


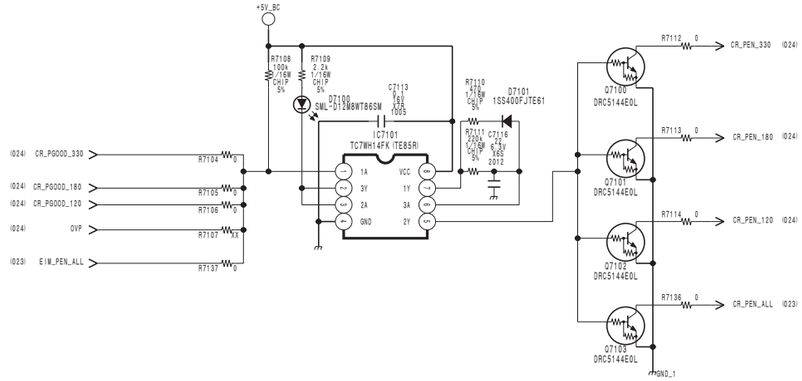


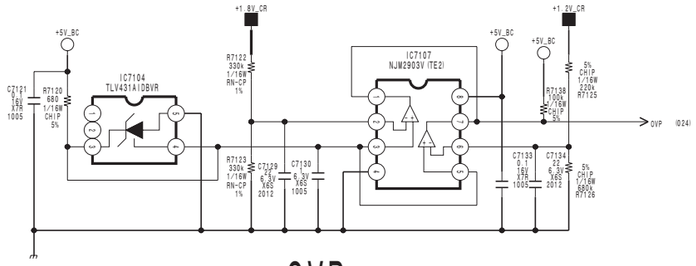

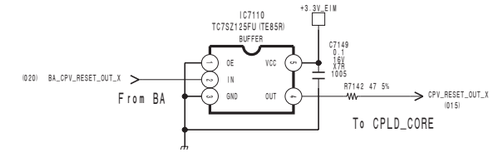

Power Fail Detection

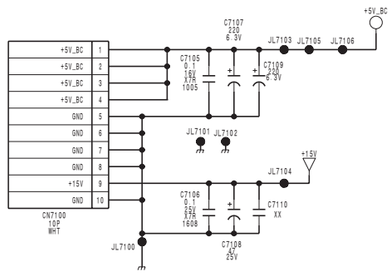


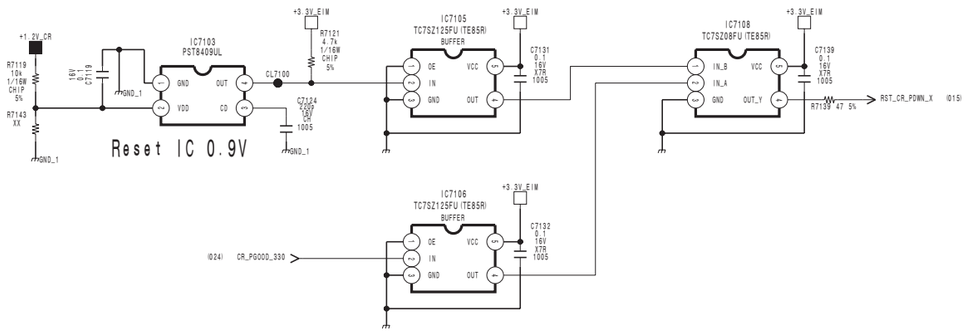






BC (24/33)
BOARD NO. 1-884-396-12

BC (25/33)
SUFFIX: -12

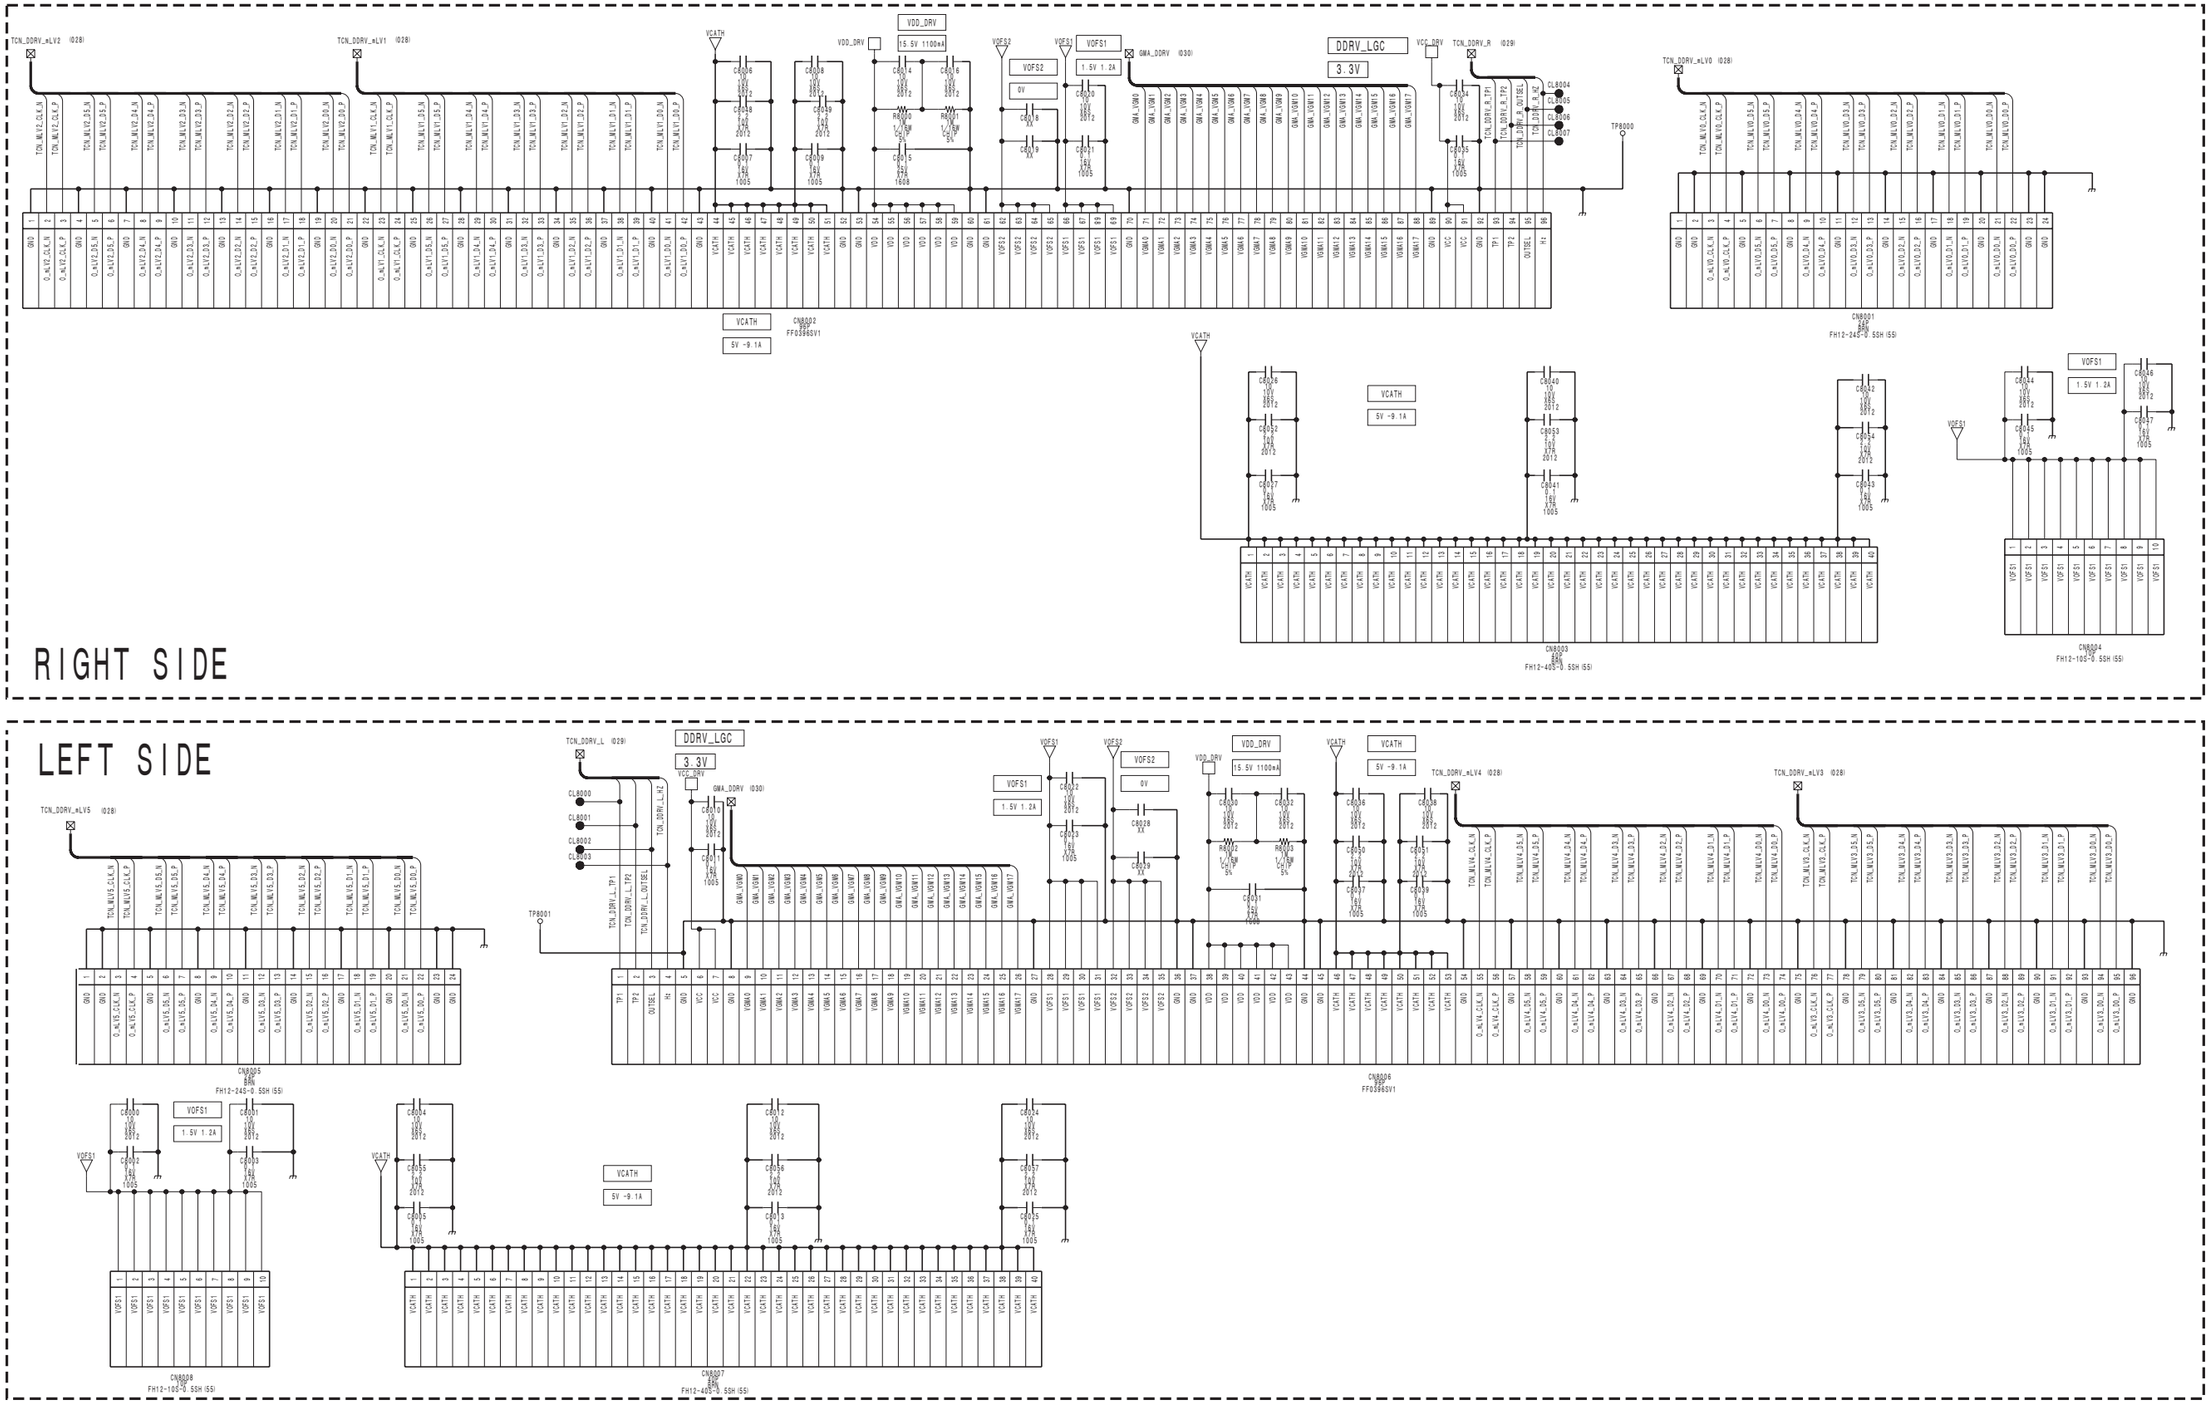

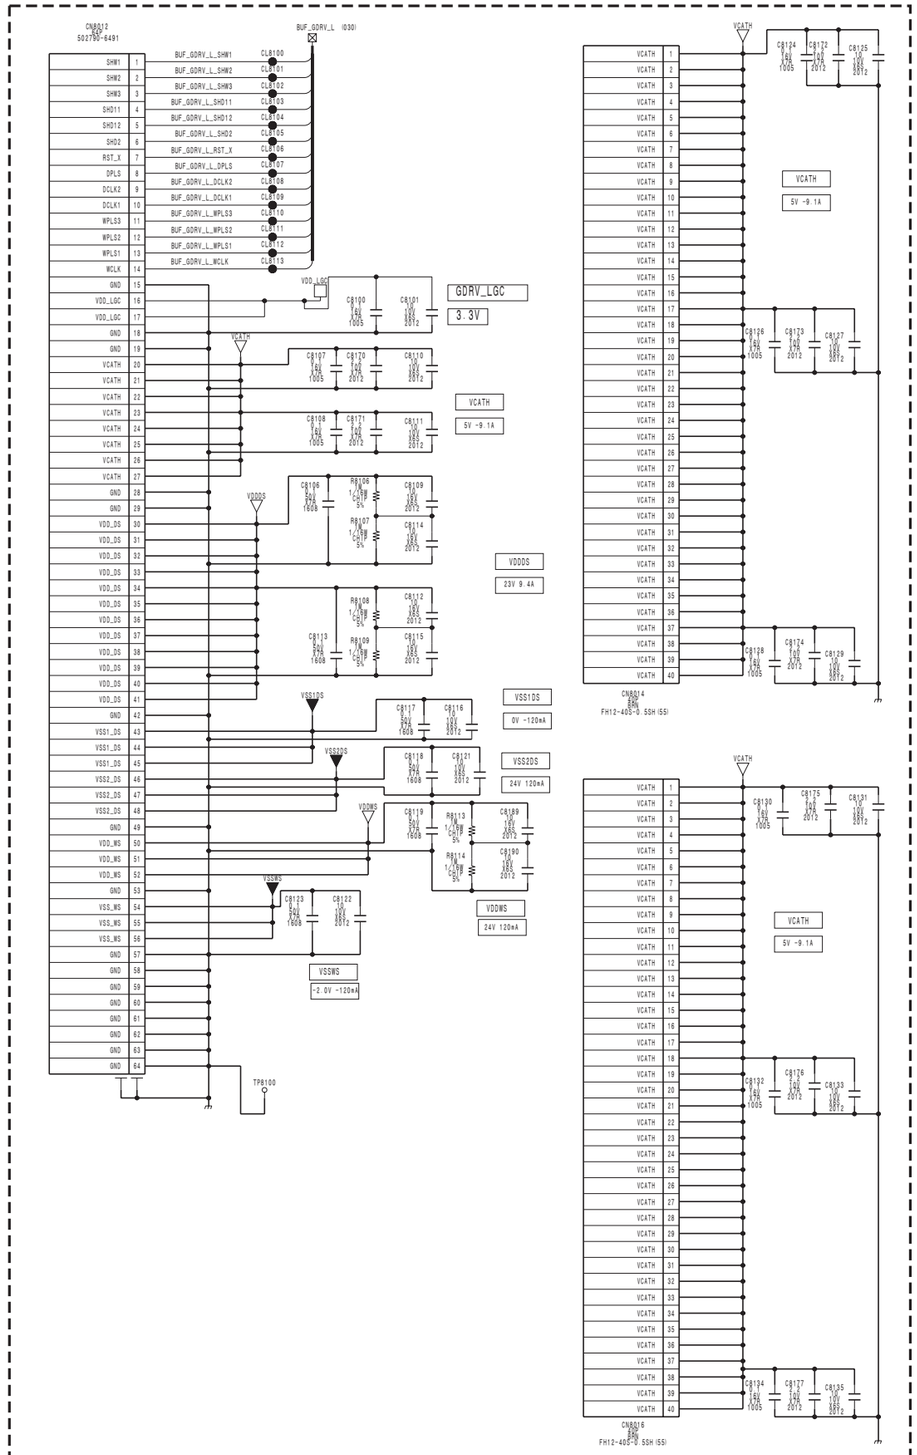

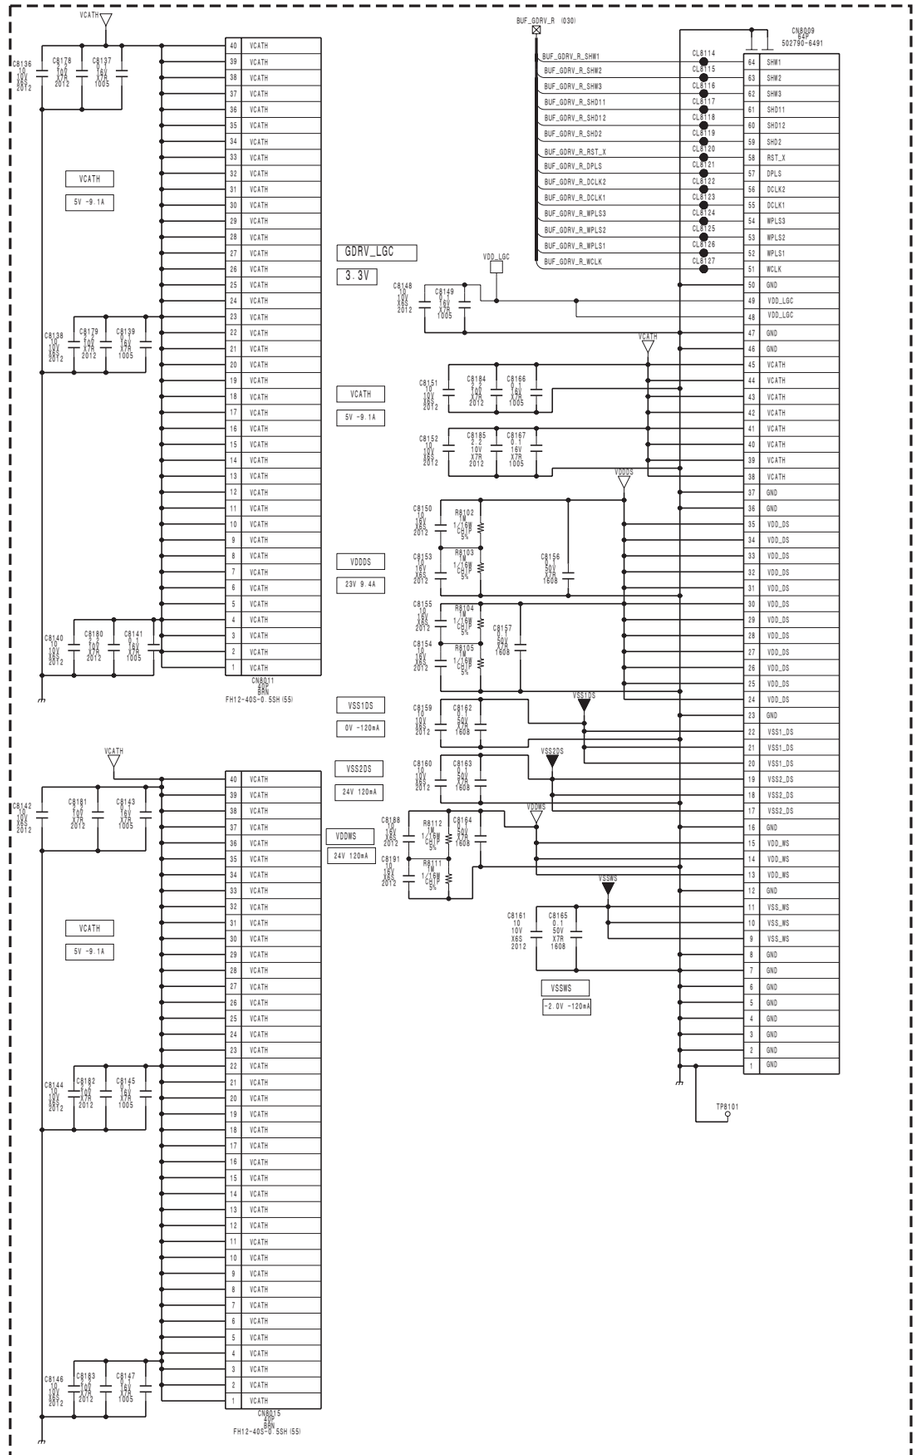

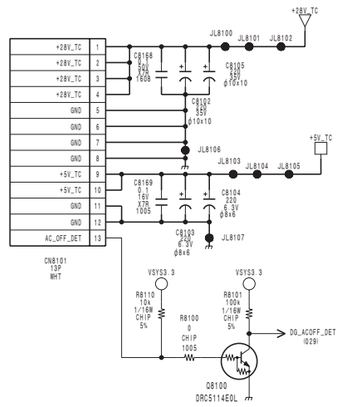

LEFT SIDE


RIGHT SIDE

BC (26/33)
BOARD NO. 1-884-396-12


PVM-1741

7-27 7-27

A B C D E F G H

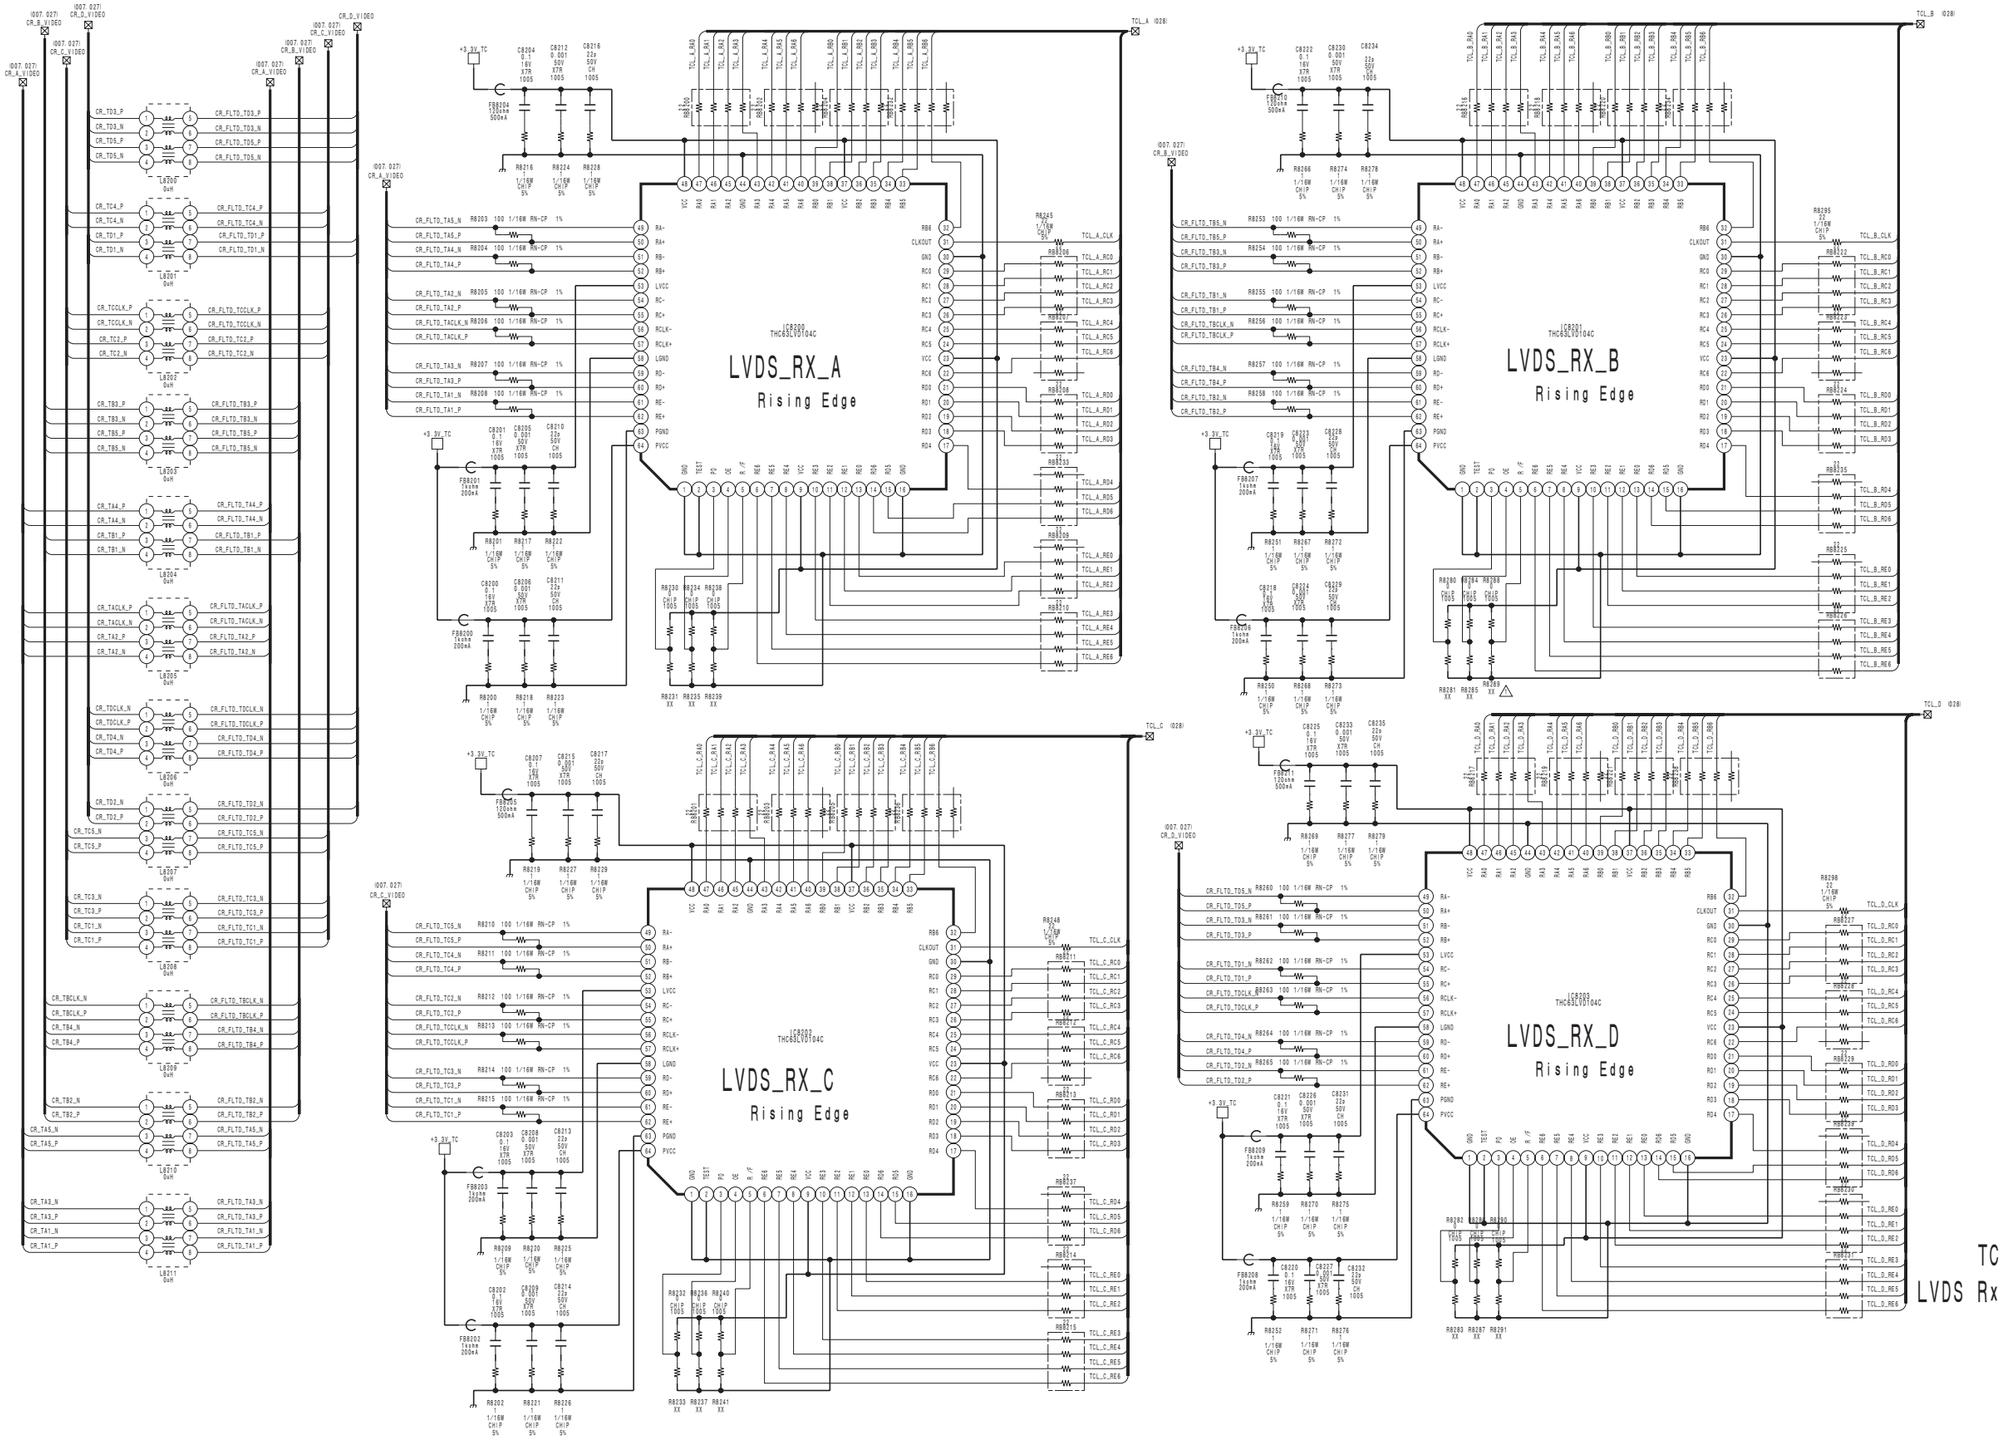


BC (27/33)
BOARD NO. 1-884-396-12

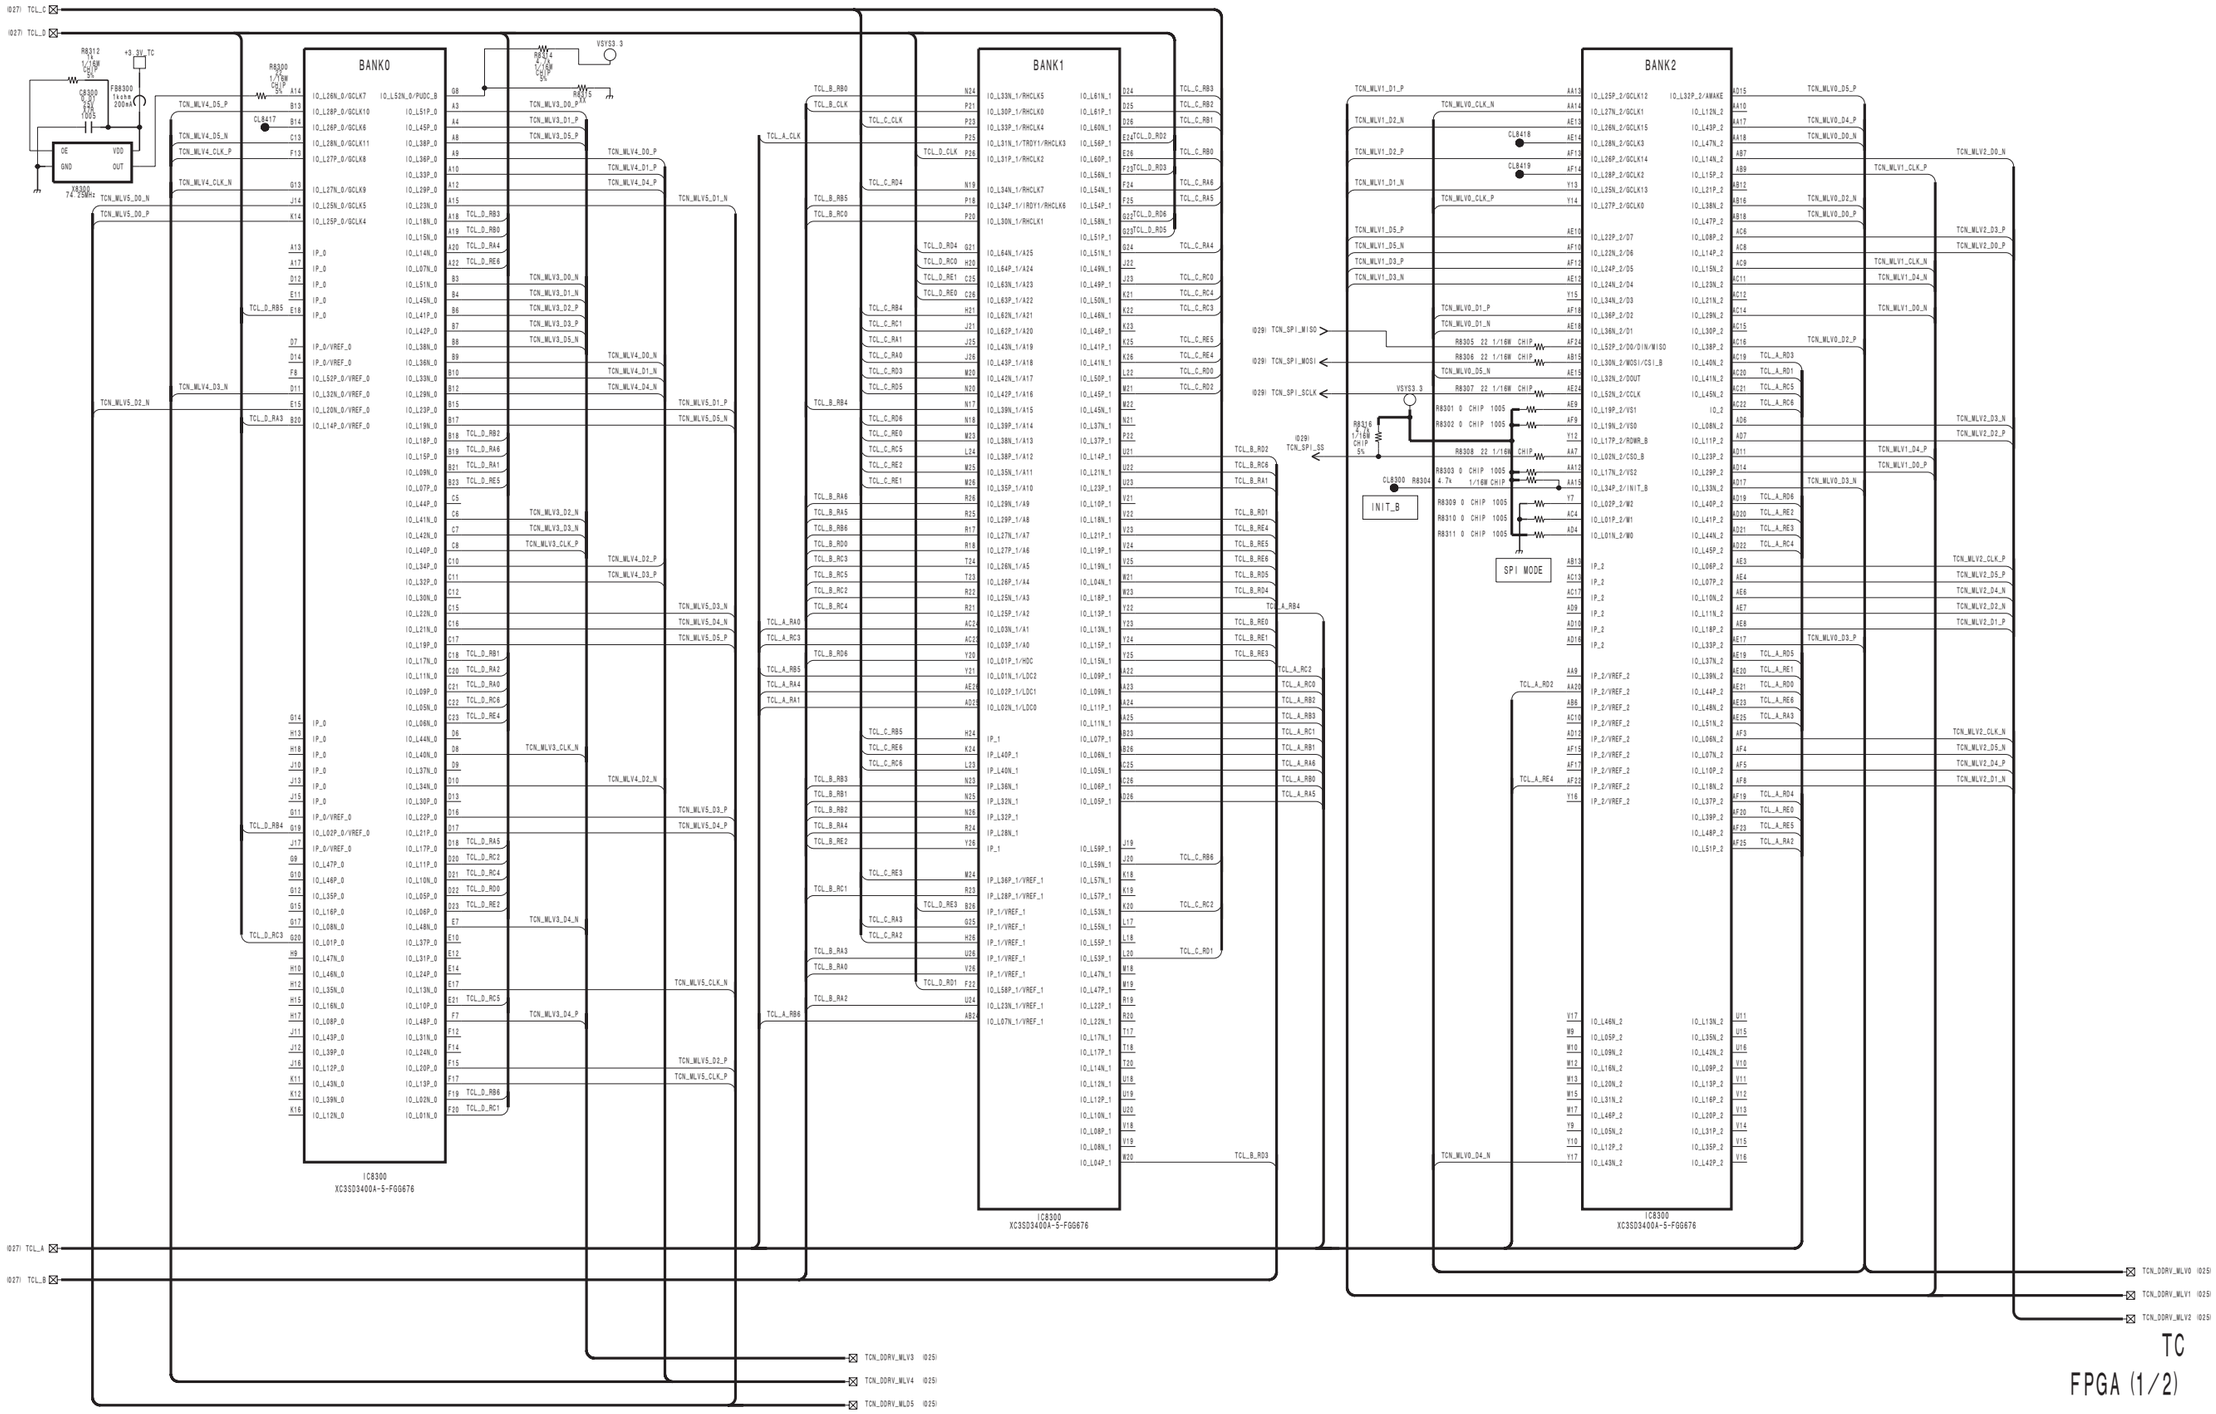

BC (28/33)
BOARD NO. 1-884-396-12


BC (29/33) **SUFFIX: -12**

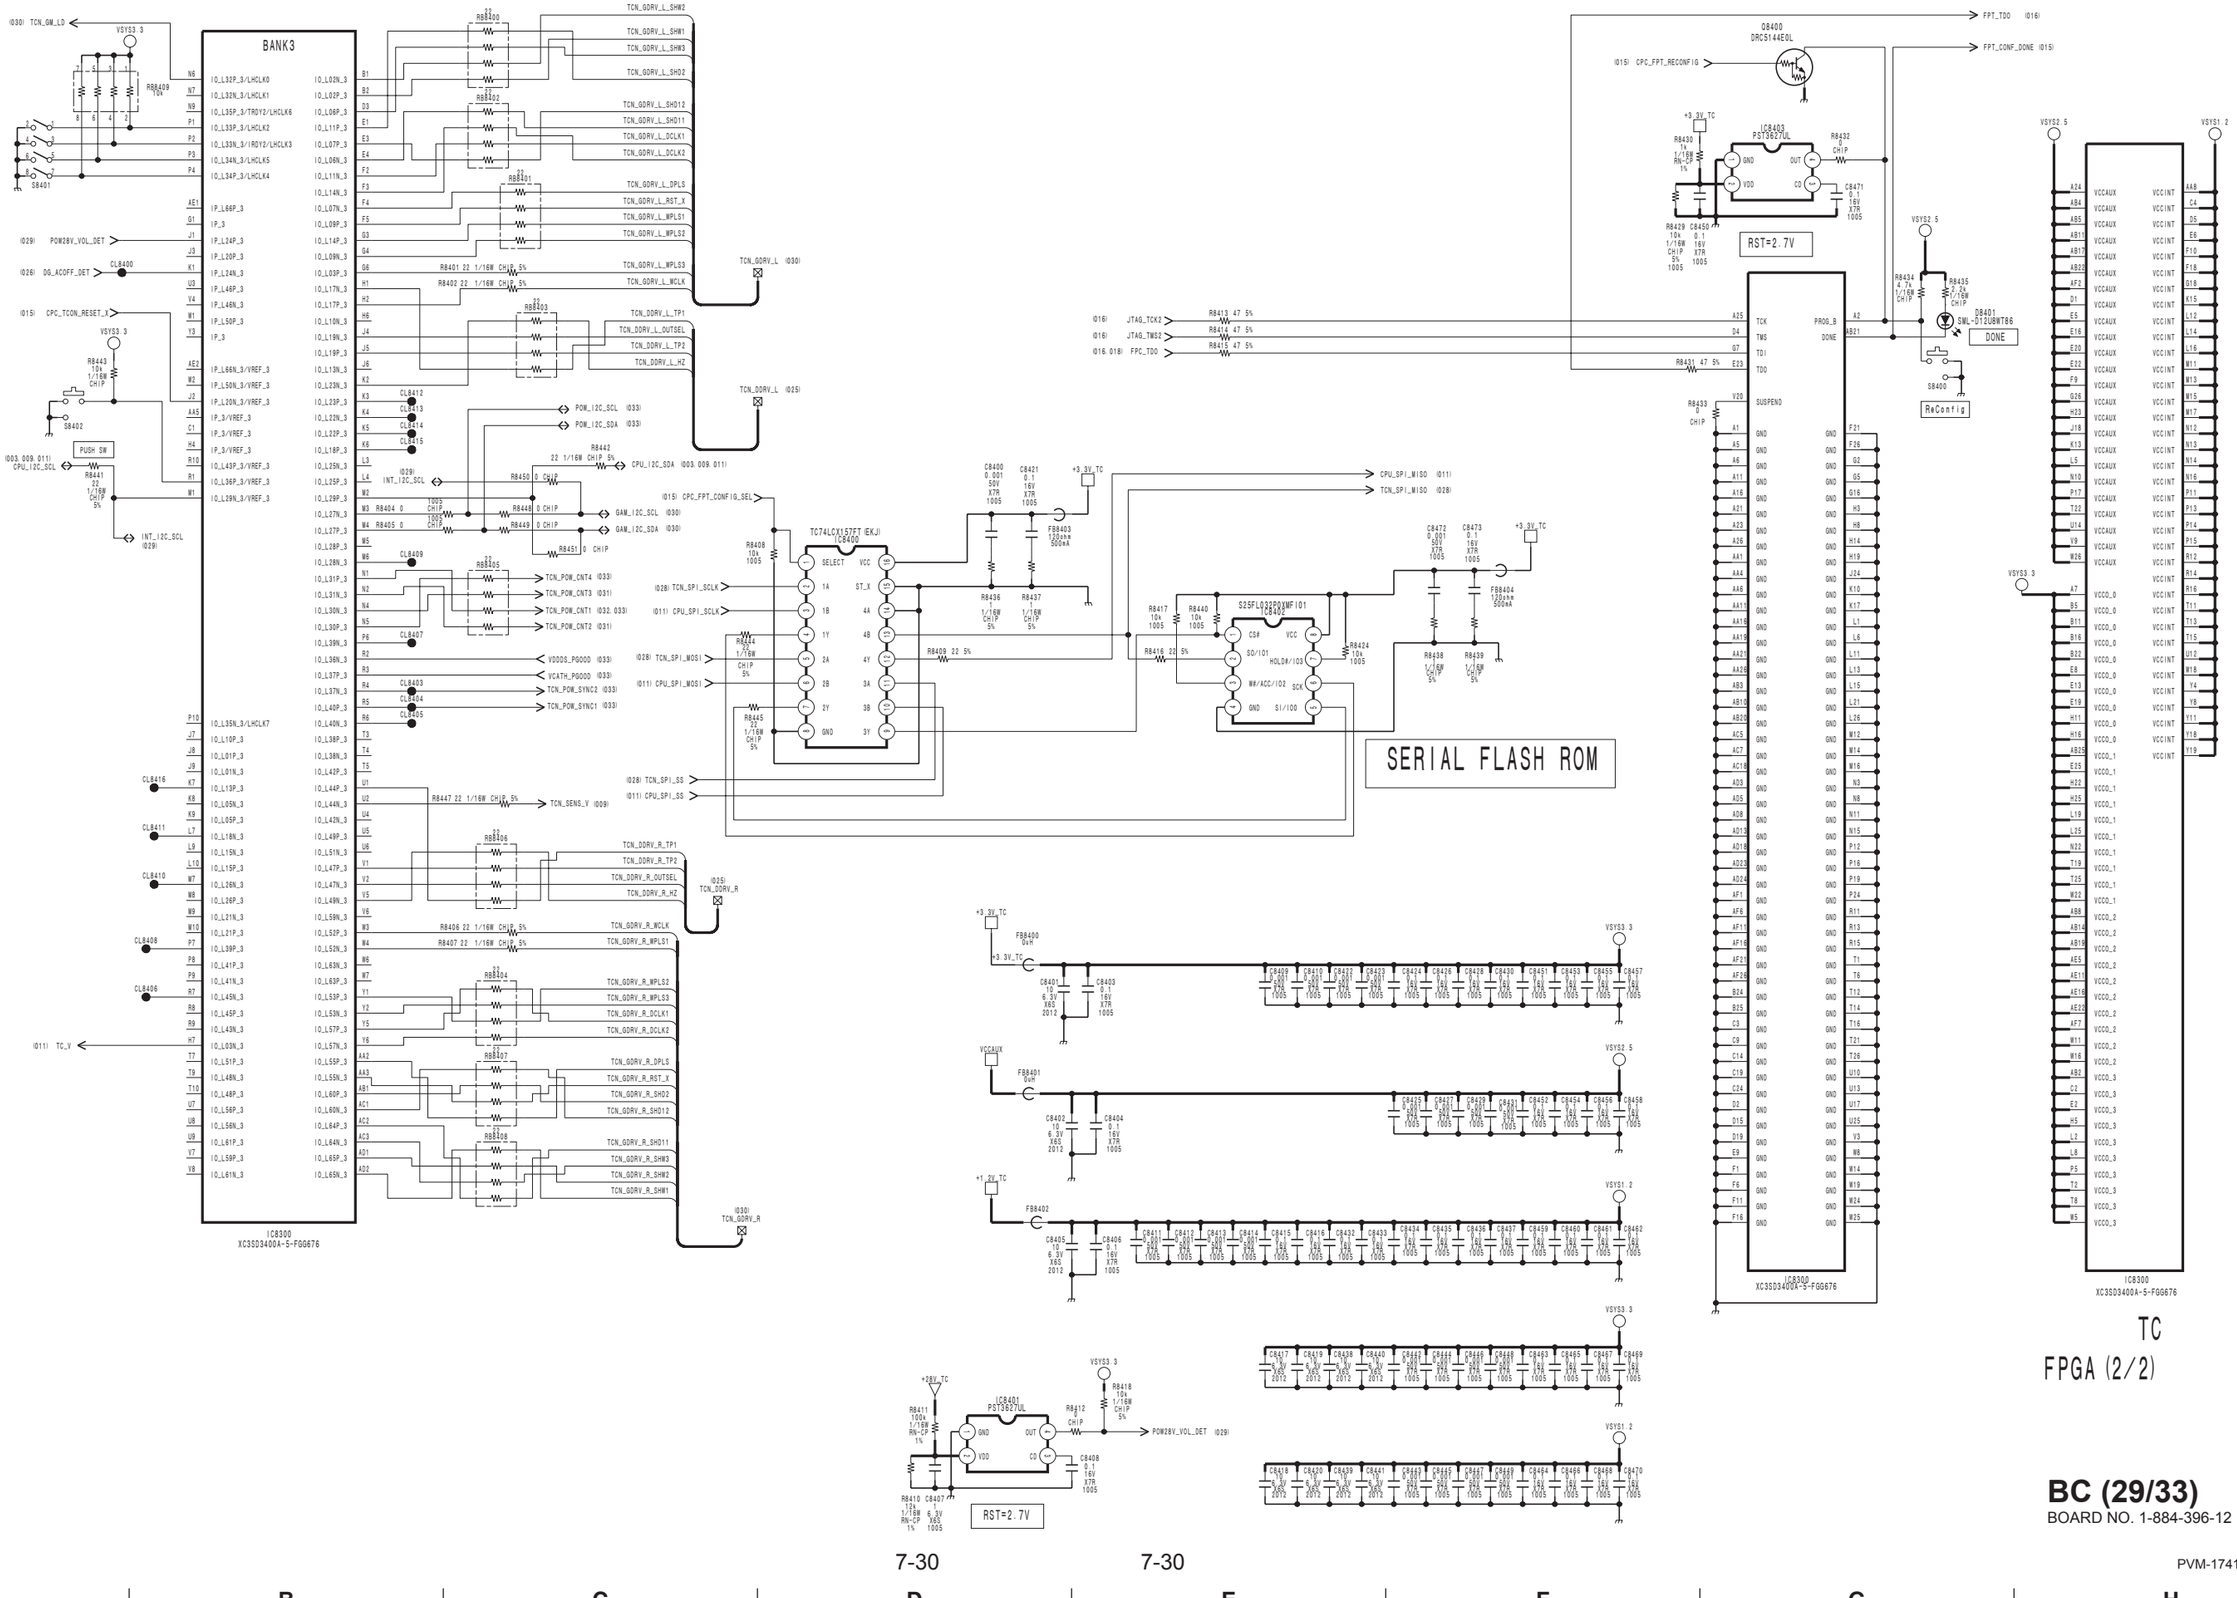


7-30 7-30

BC (29/33)
BOARD NO. 1-884-396-12

PVM-1741

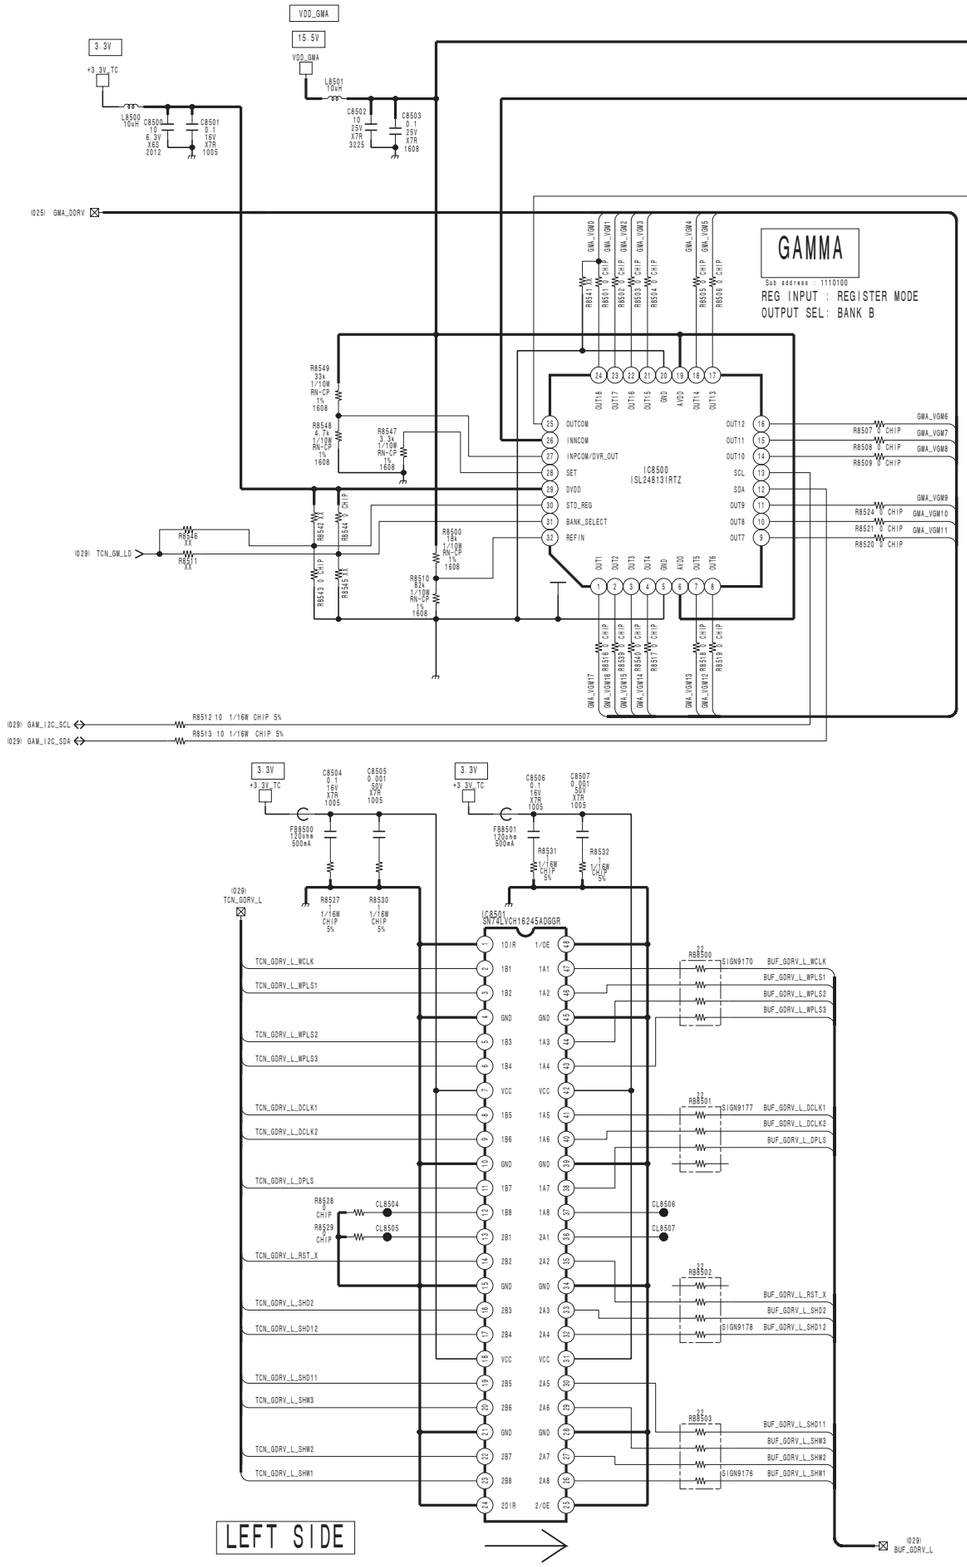


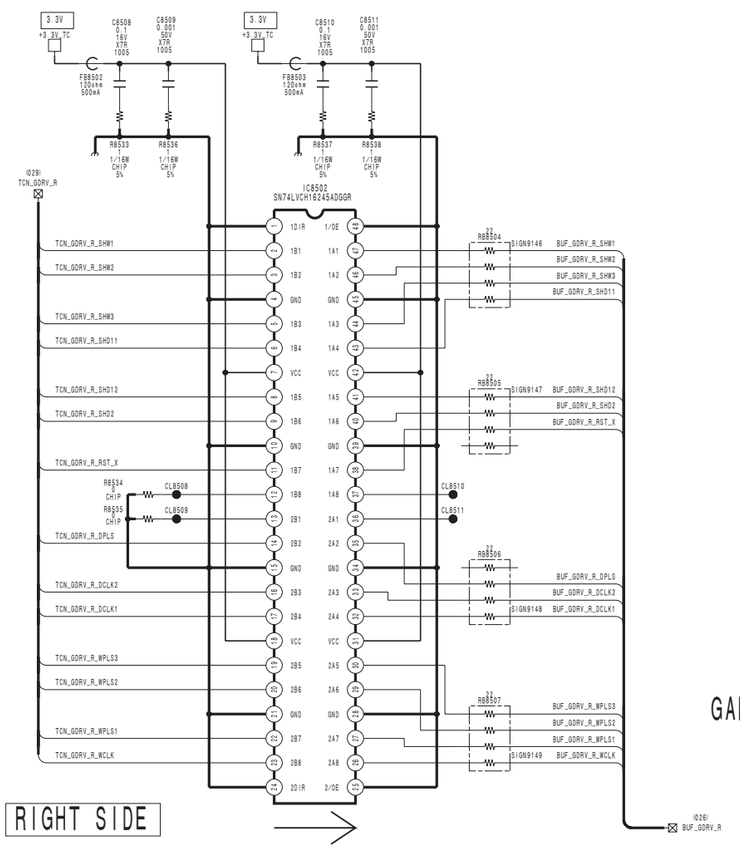



TC

GAMMA, GDRV_SIG_BUFFER

BC (30/33)
BOARD NO. 1-884-396-12

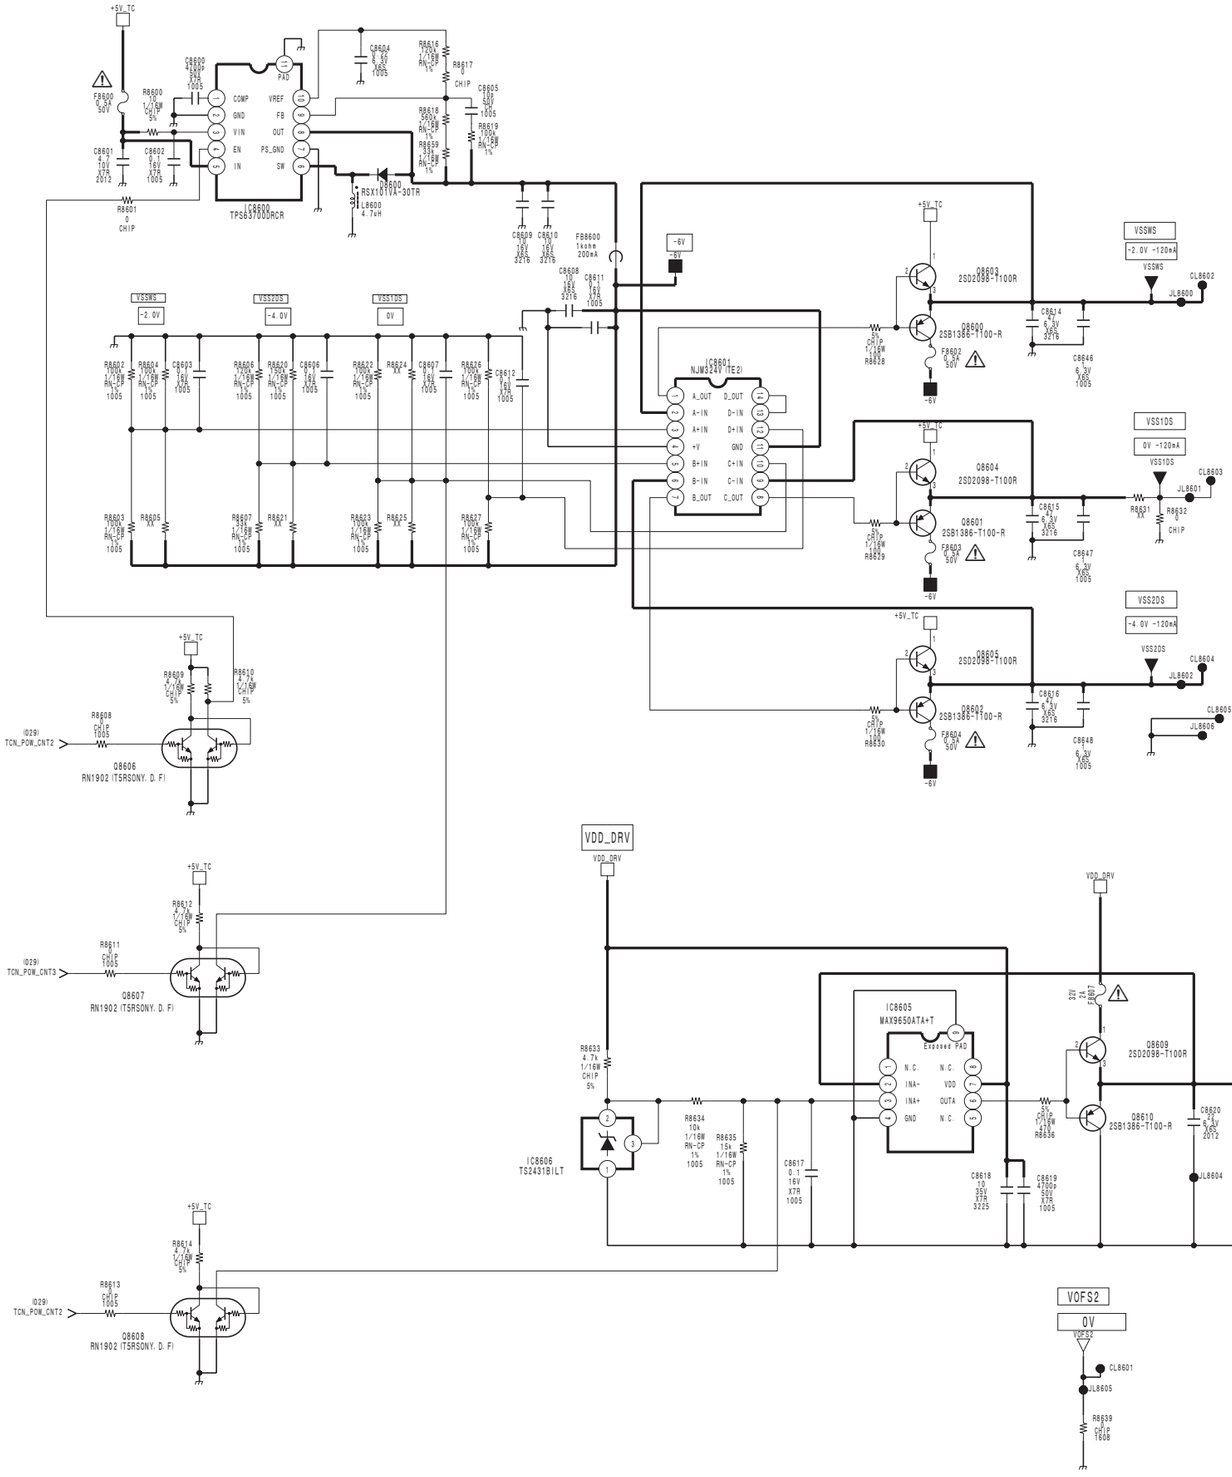

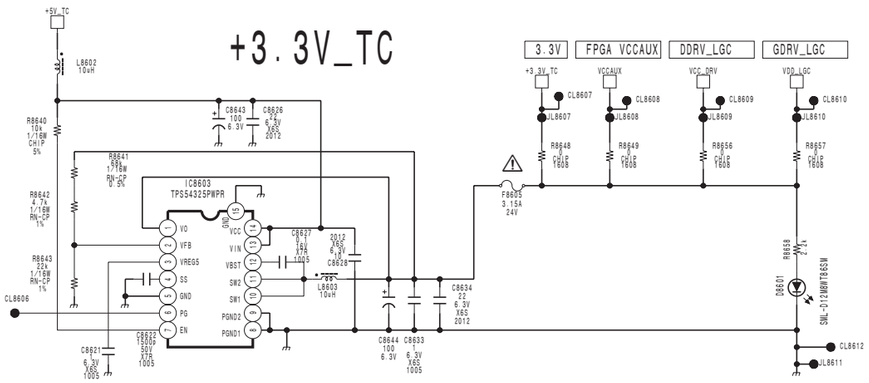


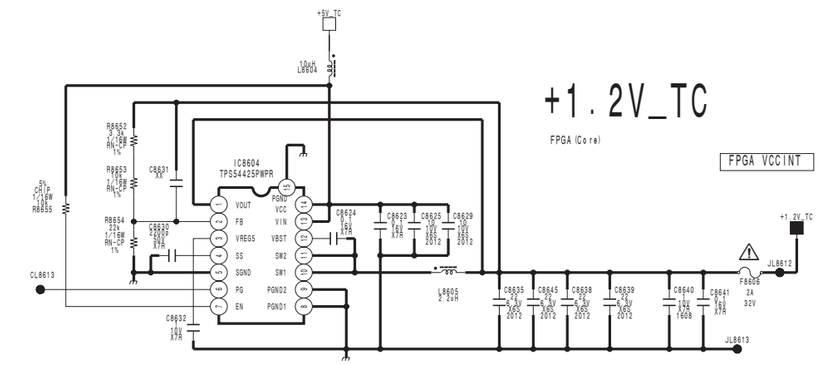

TC

PANEL POWER SUPPLY (VSSWS, VSS1DS, VSS2DS, VOFS1, VOFS2)
POWER SUPPLY (3.3V, FPGA_CORE)

BC (31/33)
BOARD NO. 1-884-396-12

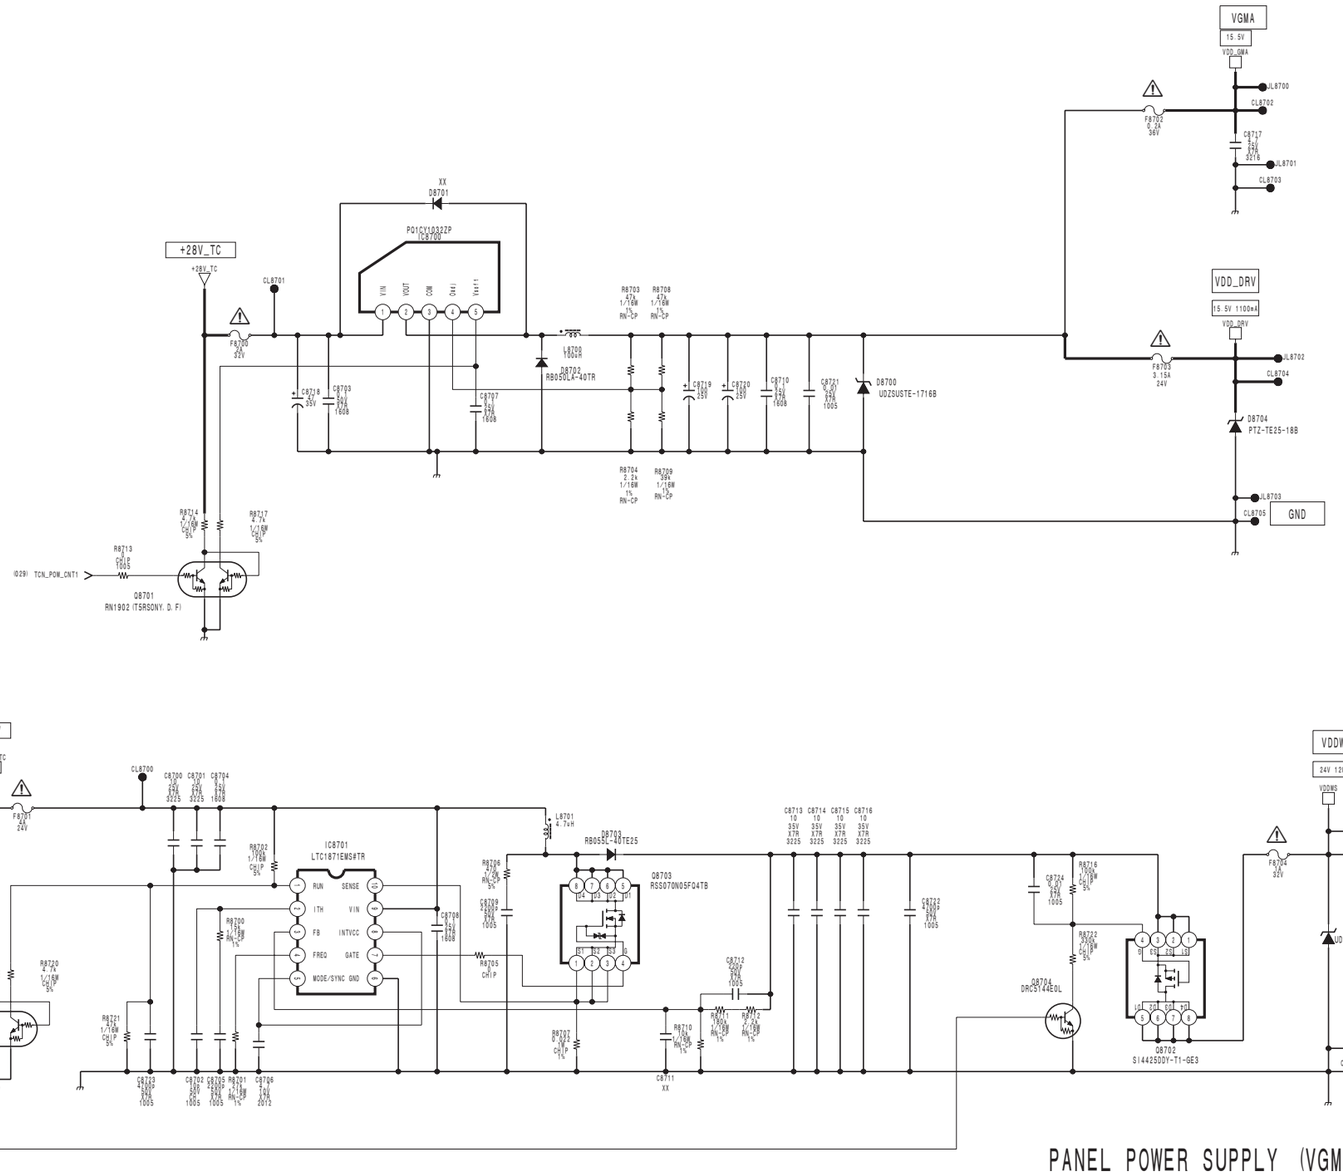

TC

PANEL POWER SUPPLY (VGMA, VDD_DRV, VDDWS)


BC (32/33)
BOARD NO. 1-884-396-12

BC (33/33)

SUFFIX: -12


BC (33/33)

SUFFIX: -12

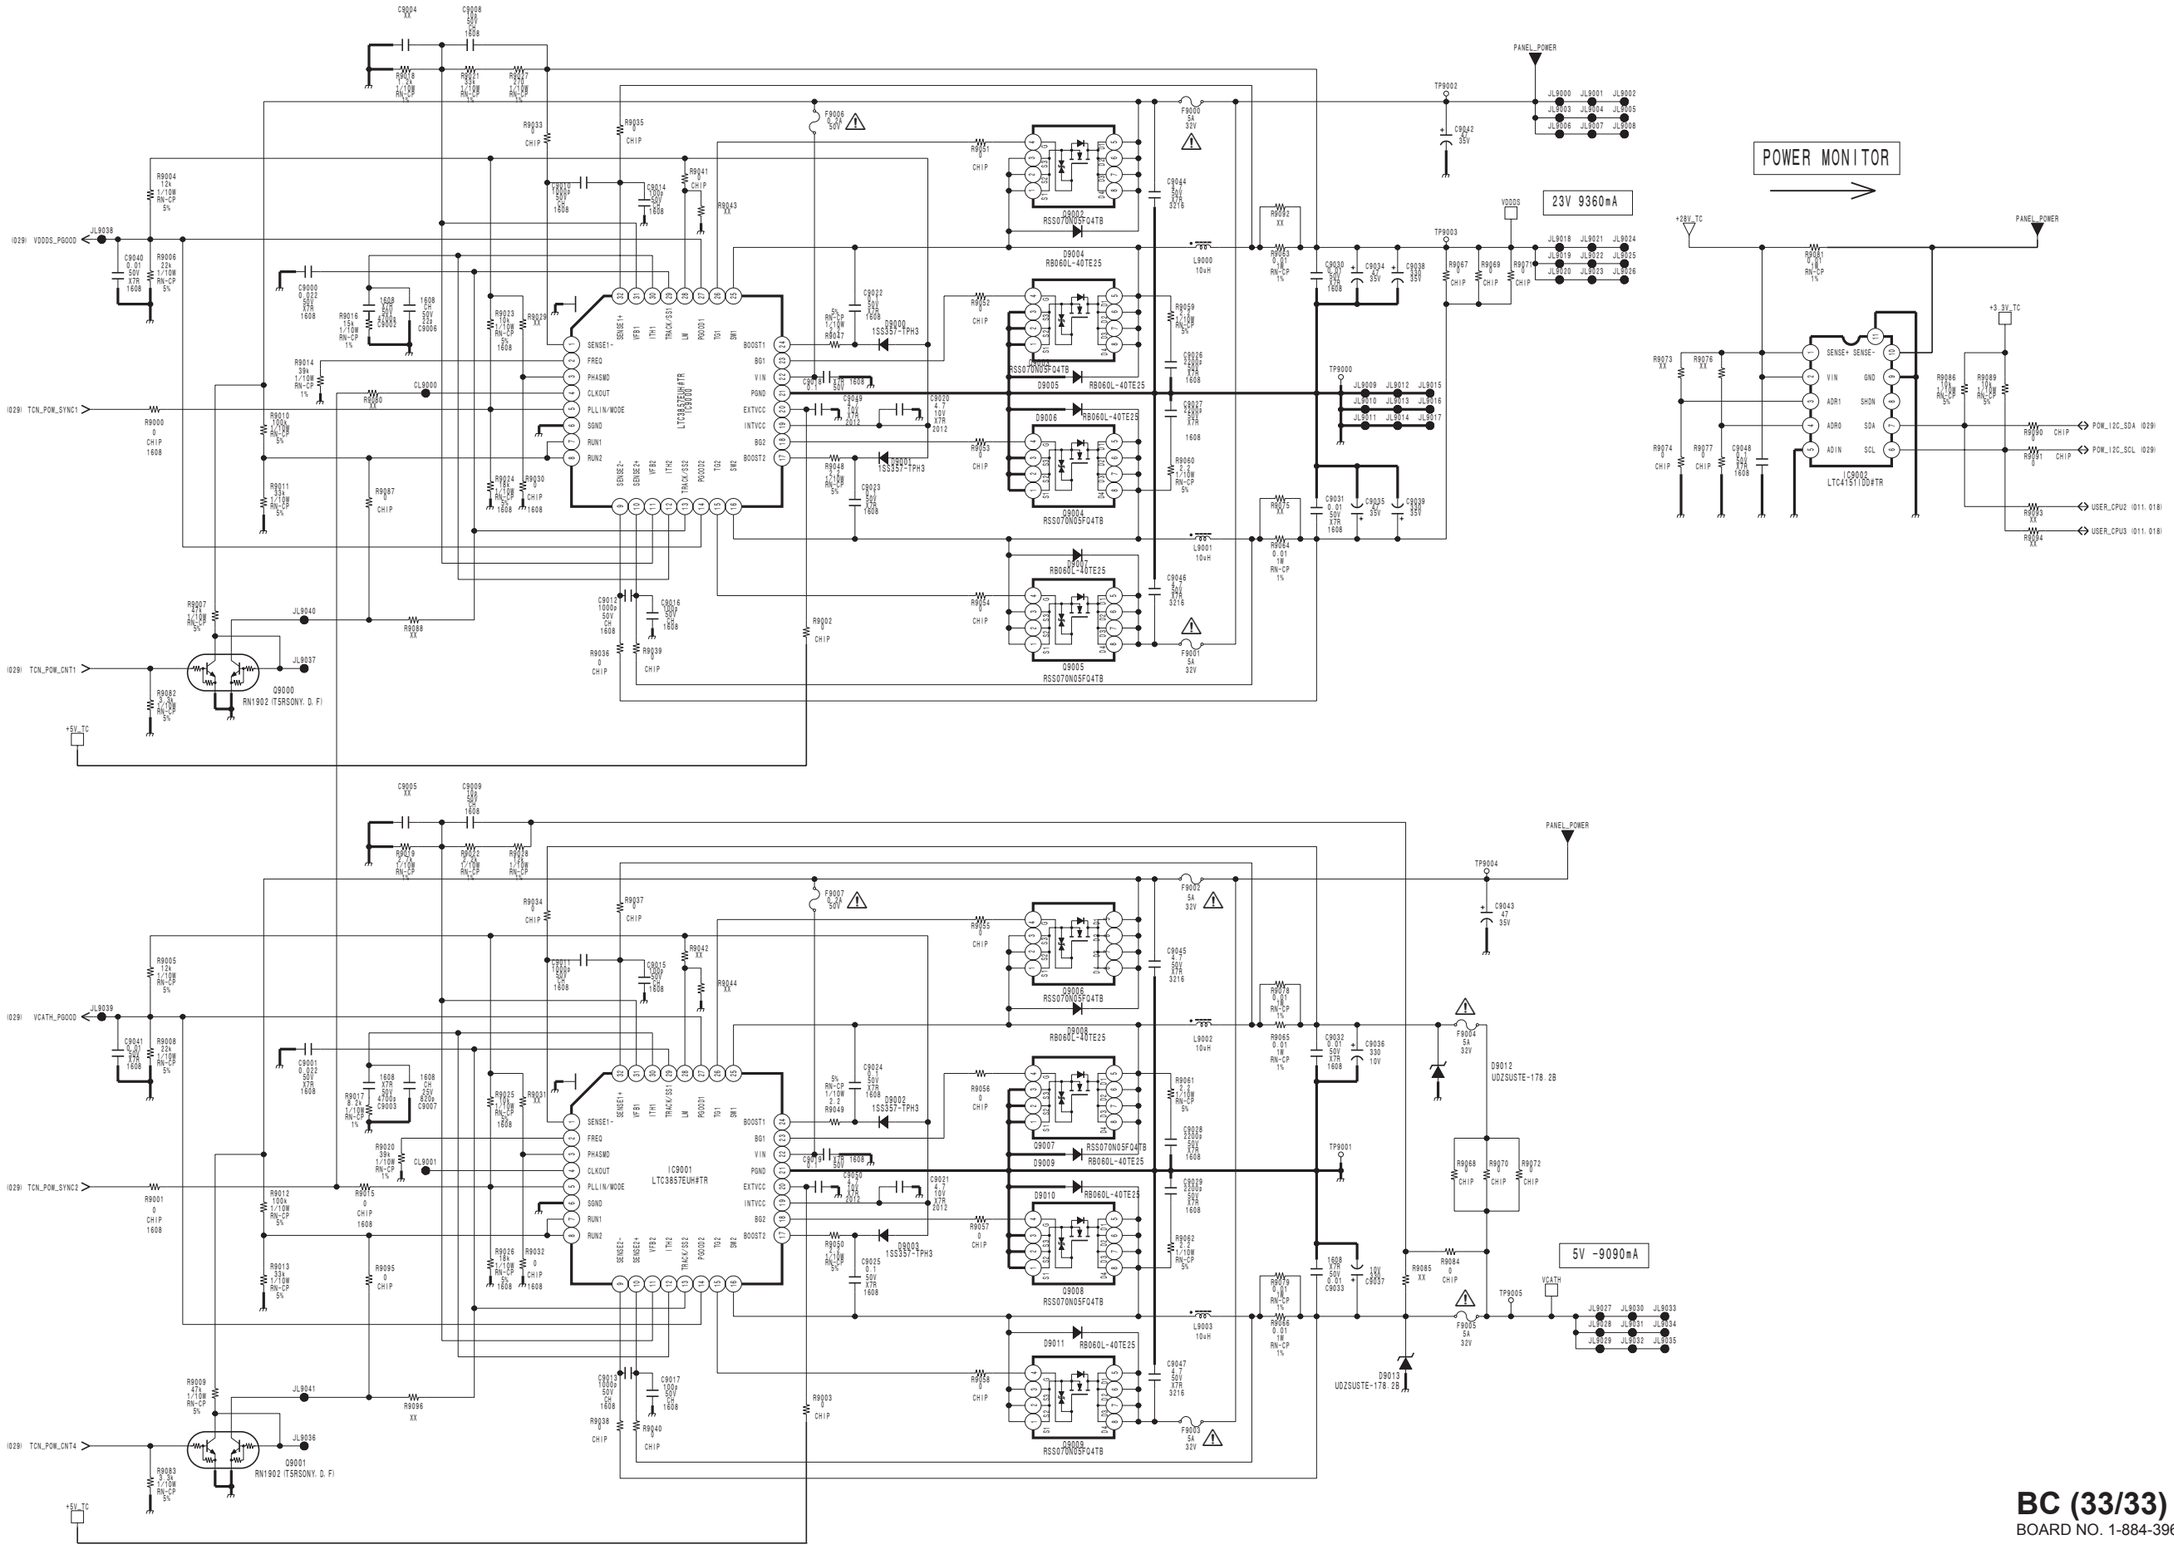

BC (33/33)

BOARD NO. 1-884-396-12

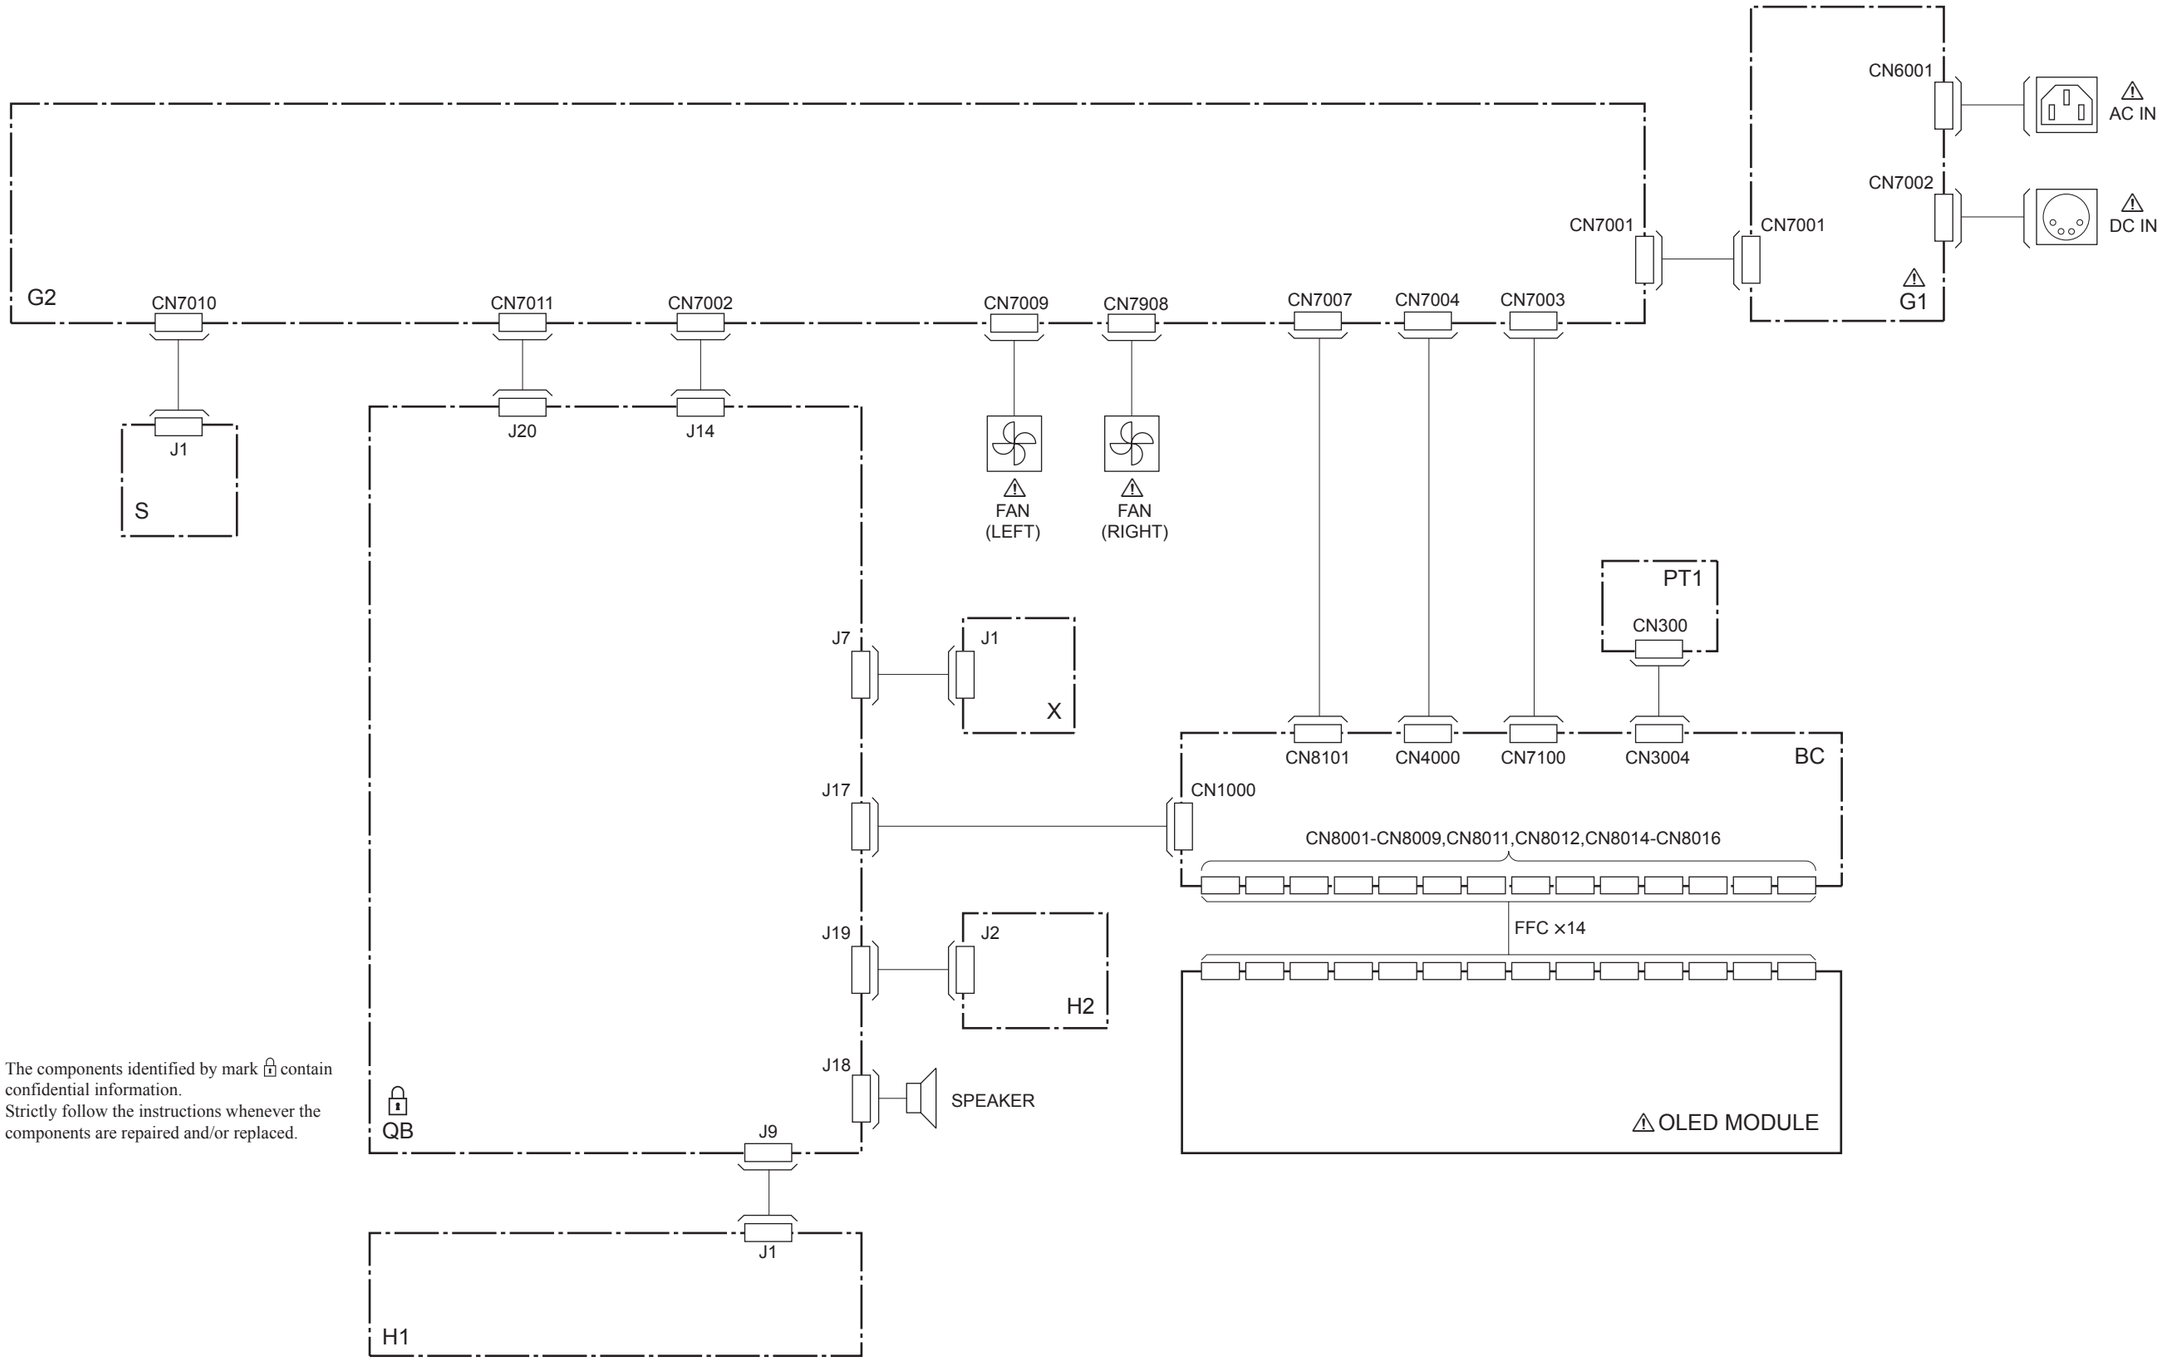

Note: The components identified by mark 🔒 contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.


Section 8
Board Layouts

Index


Board name	Page
PT1	8-1
BC	8-2

8-1

PT1

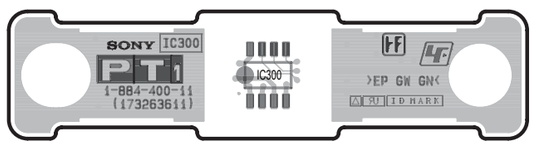

PT1 -A SIDE-
SUFFIX: -11

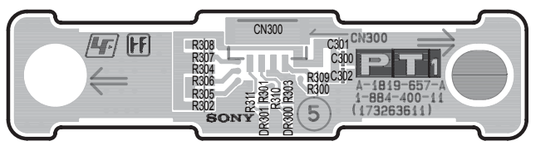


PT1 -B SIDE-
SUFFIX: -11

① (Refer to page 8-3)

② (Refer to page 8-4)

③ (Refer to page 8-5)

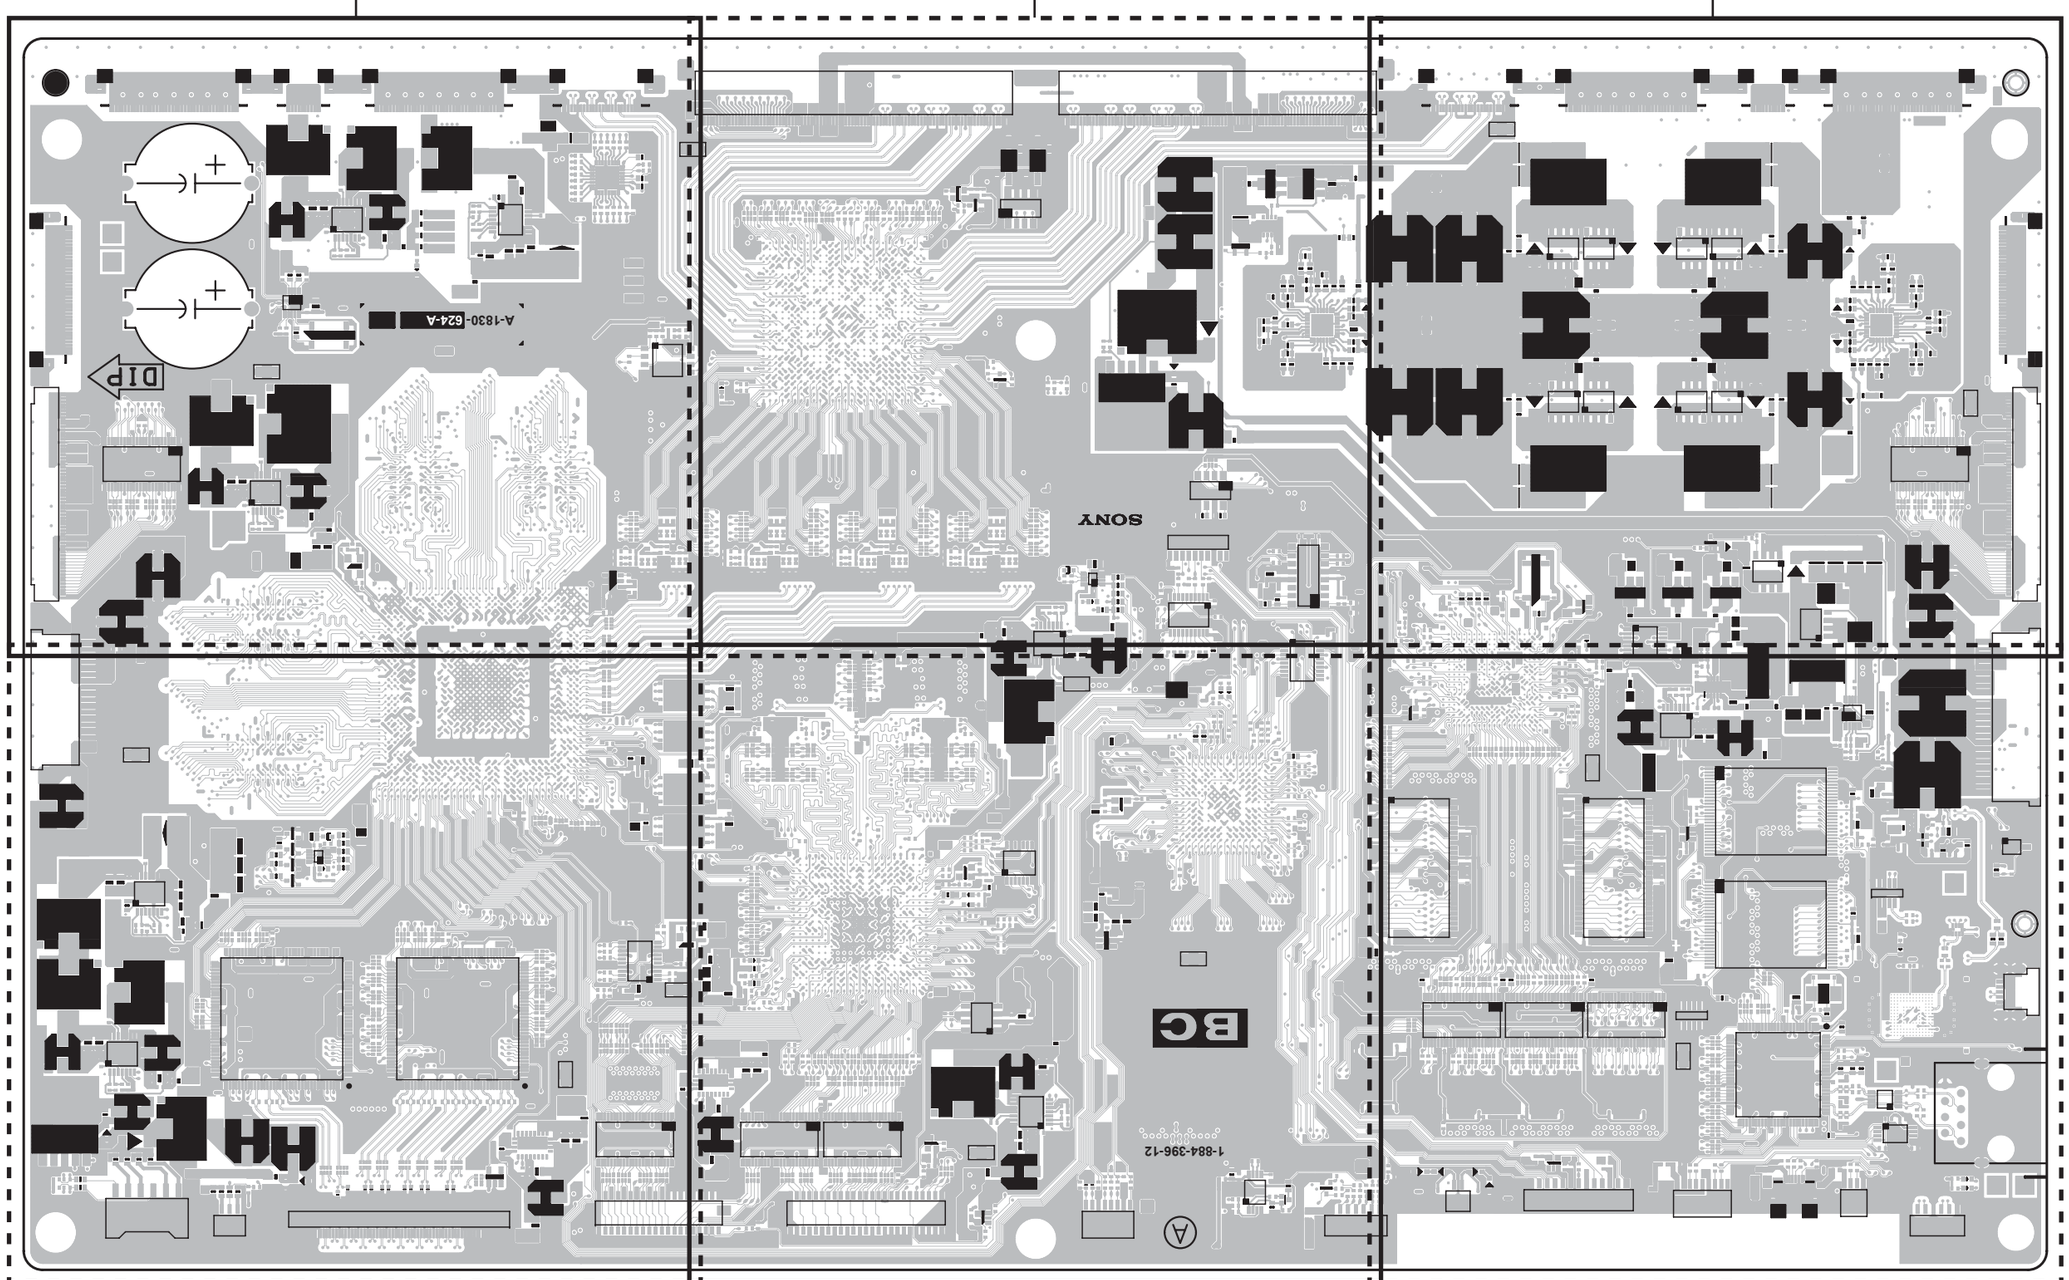


④ (Refer to page 8-6)

⑤ (Refer to page 8-7)

⑥ (Refer to page 8-8)


BC -A SIDE-
SUFFIX: -12

PVM-1741

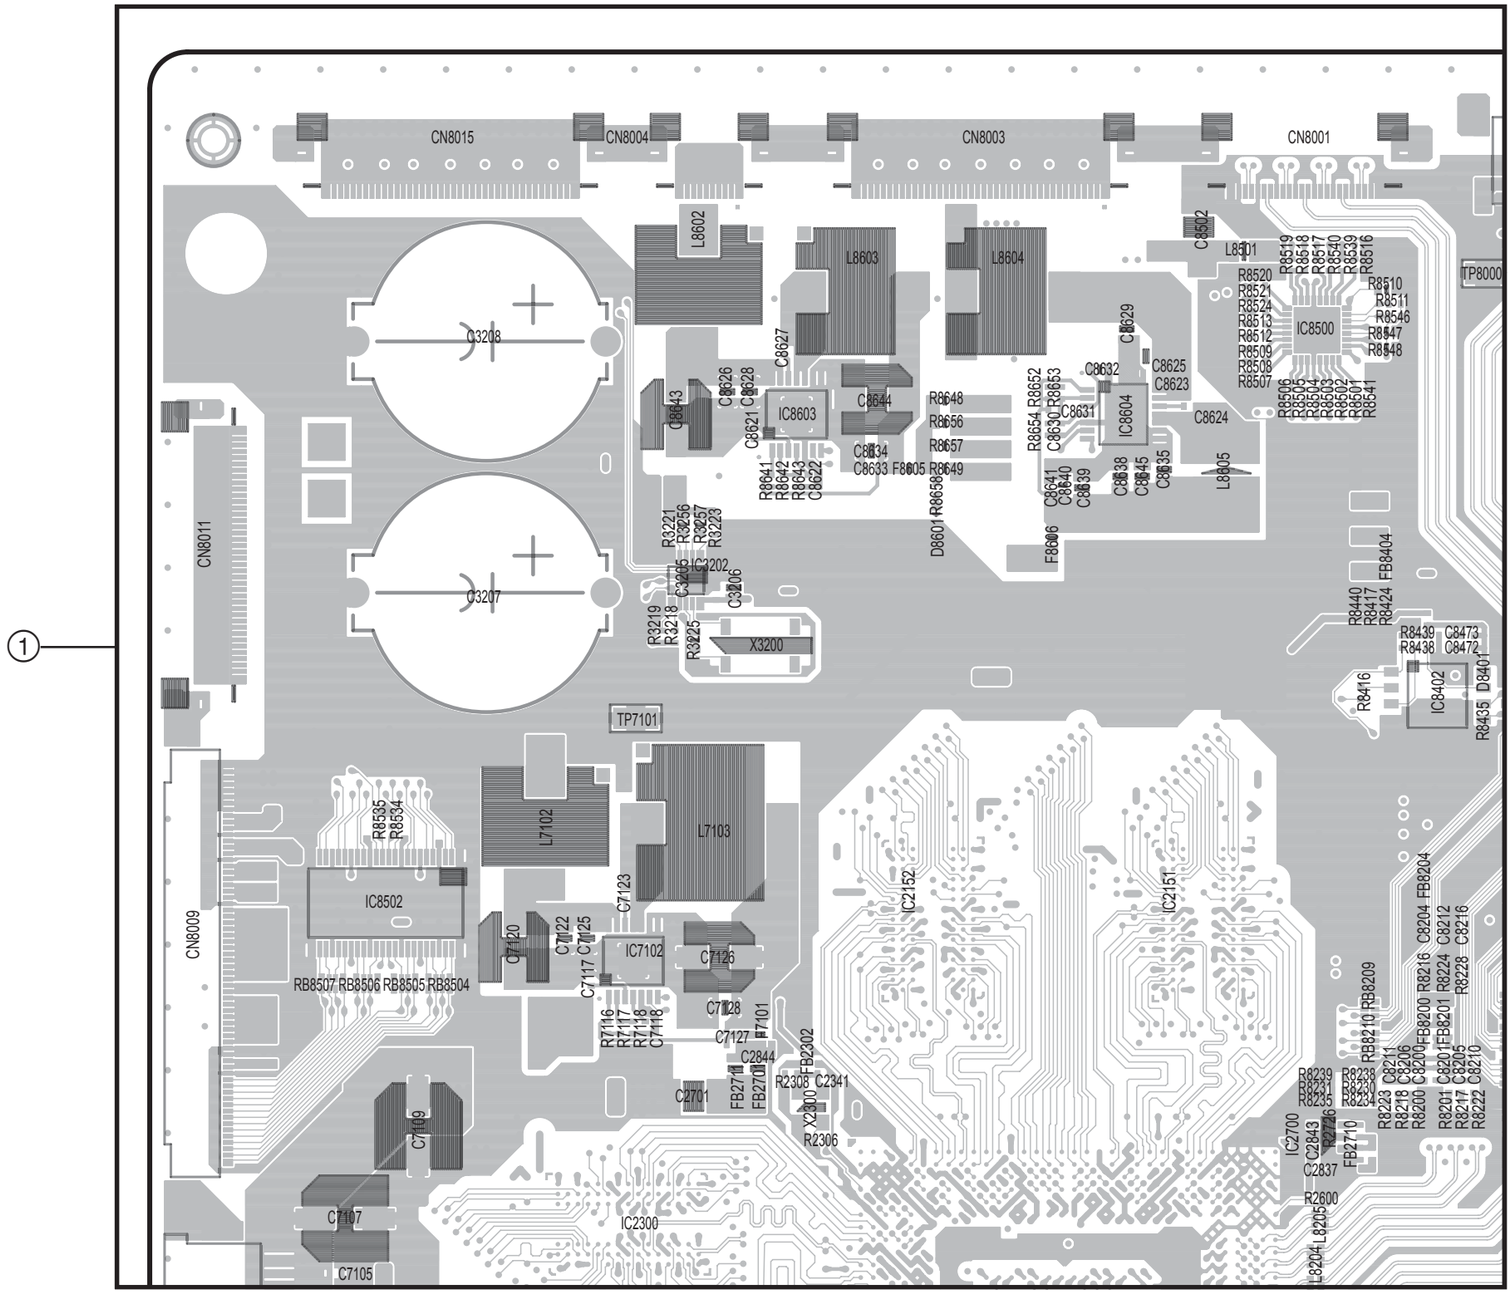

1


BC -A SIDE-
SUFFIX: -12

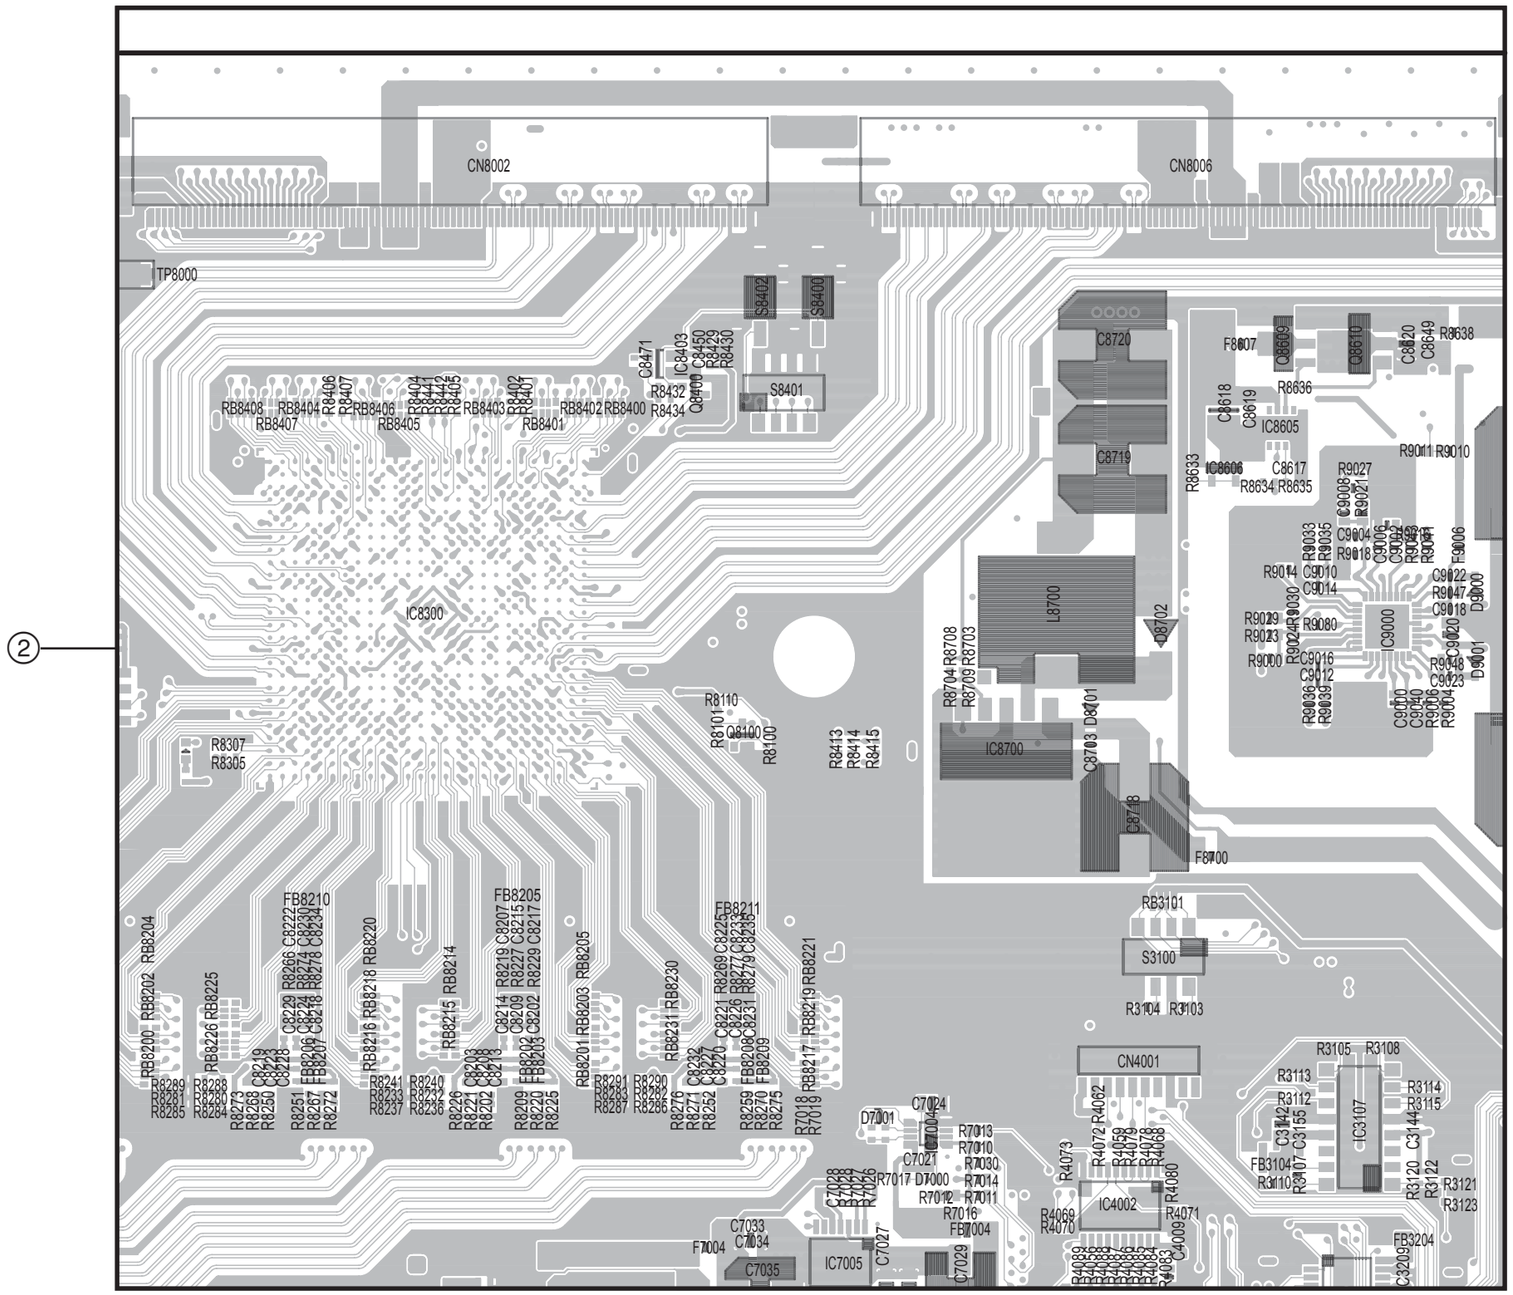


②

BC -A SIDE-
SUFFIX: -12

PVM-1741

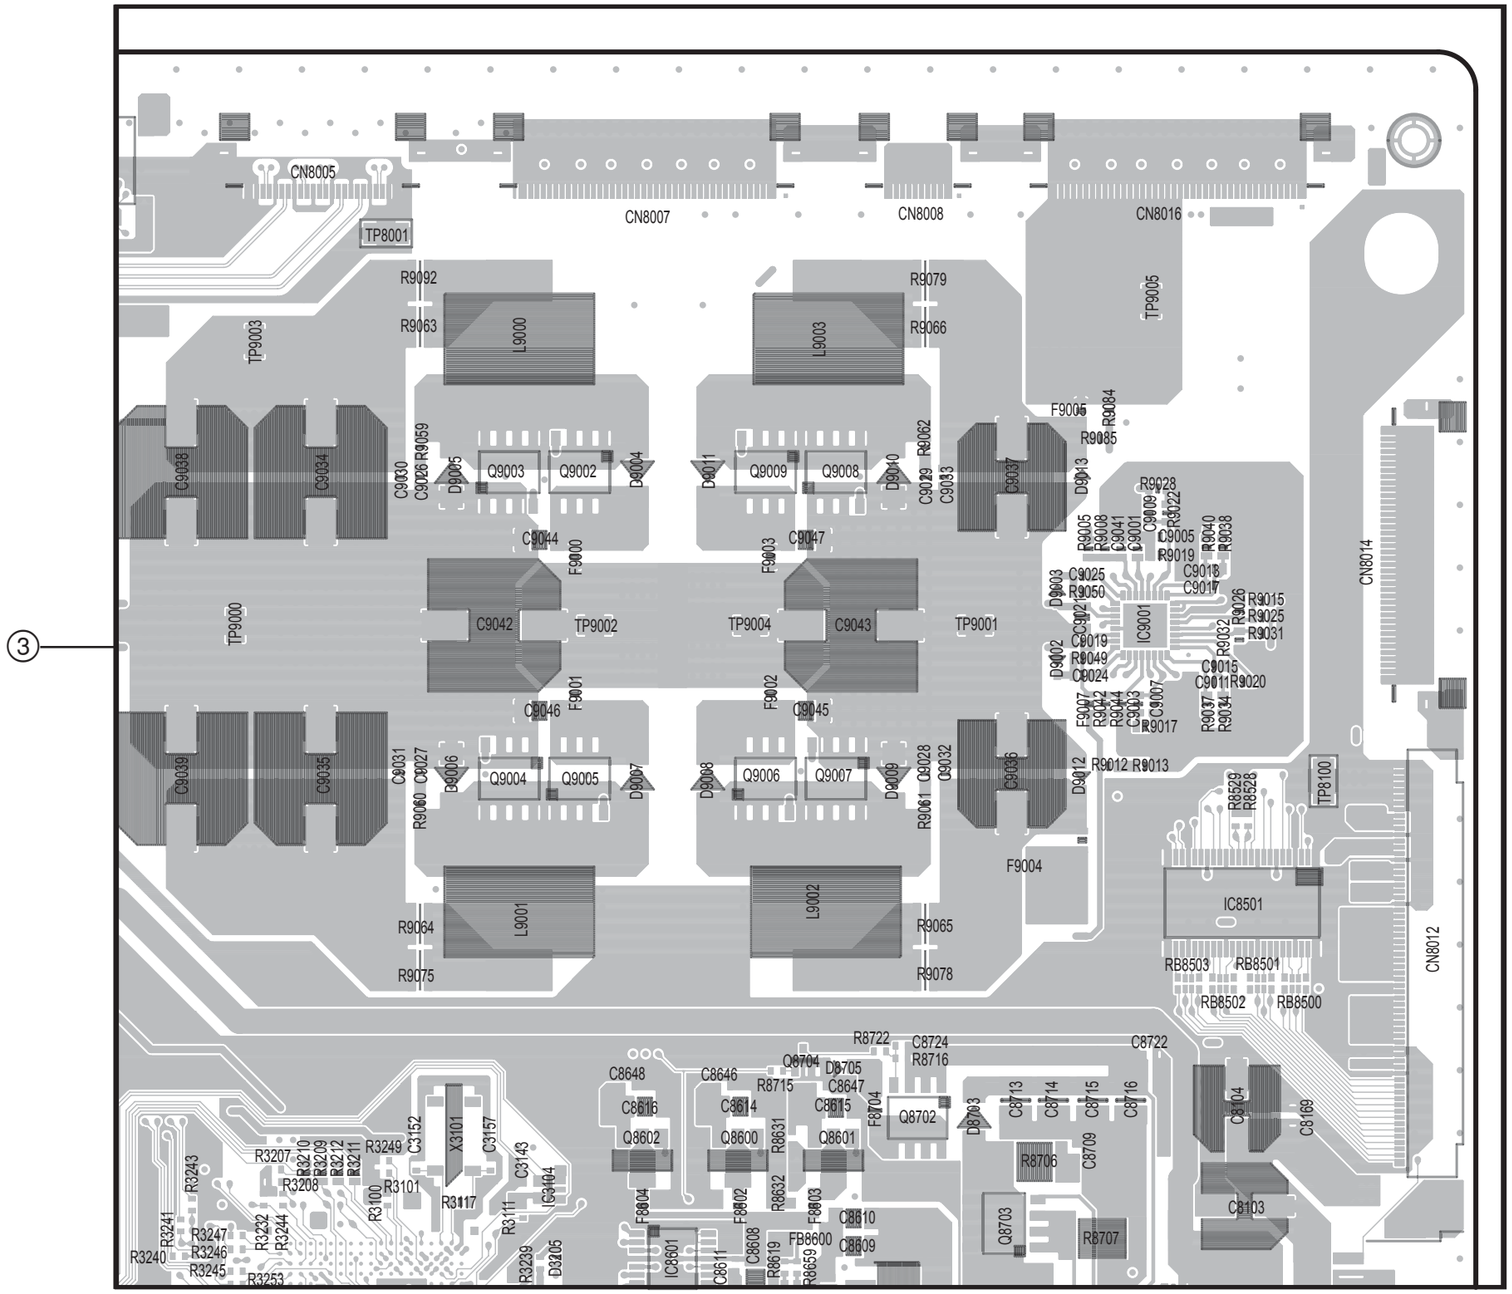
CN8005
TP8001
CN8007
CN8008
CN8016
TP9005
R9092
R9063
L9000
R9079
R9066
L9003
TP9003
F9005
R9084
R9085
C9038
C9034
C9030
C9026
R9059
D9005
Q9003
Q9002
D9004
D9011
Q9009
Q9008
D9010
C9029
C9033
C9037
D9013
R9028
R9022
C9044
C9047
F9000
F9003
R9005
R9008
C9041
L9001
C9009
C9005
R9019
R9040
R9038
C9025
C9013
C9017
D9003
R9050
C9021
R9026
R9015
R9025
R9031
TP9000
C9042
TP9002
TP9004
C9043
TP9001
IC9001
C9019
R9049
C9024
D9002
C9015
C9011
R9020
F9001
F9002
C9046
C9045
F9007
R9042
R9044
C9003
C9007
R9017
R9037
R9034
C9039
C9035
C9031
C9027
R9060
D9006
Q9004
Q9005
D9007
D9008
Q9006
Q9007
D9009
C9028
C9032
C9036
D9012
R9012
R9013
R8529
R8528
TP8100
F9004
L9001
L9002
R9064
R9075
R9065
R9078
IC8501
RB8503
RB8501
RB8502
RB8500
CN8012
R8722
C8724
R8716
C8722
C8648
C8646
Q8704
D8705
C8647
R8715
C8616
C8614
C8615
F8704
Q8702
D8703
C8713
C8714
C8715
C8716
C8704
C8169
Q8602
Q8600
R8631
Q8601
R8706
C8709
R3207
R3210
R3209
R3212
R3211
R3249
C3152
X3101
C3157
C3143
R3243
R3208
R3100
R3101
R3117
C3104
R8632
F8804
F8802
F8803
C8610
C8103
R3241
R3247
R3232
R3244
R3246
R3240
R3245
R3253
R3111
R3239
D3205
IC8601
C8611
C8608
R8619
FB8600
R8659
C8609
Q8703
R8707


③

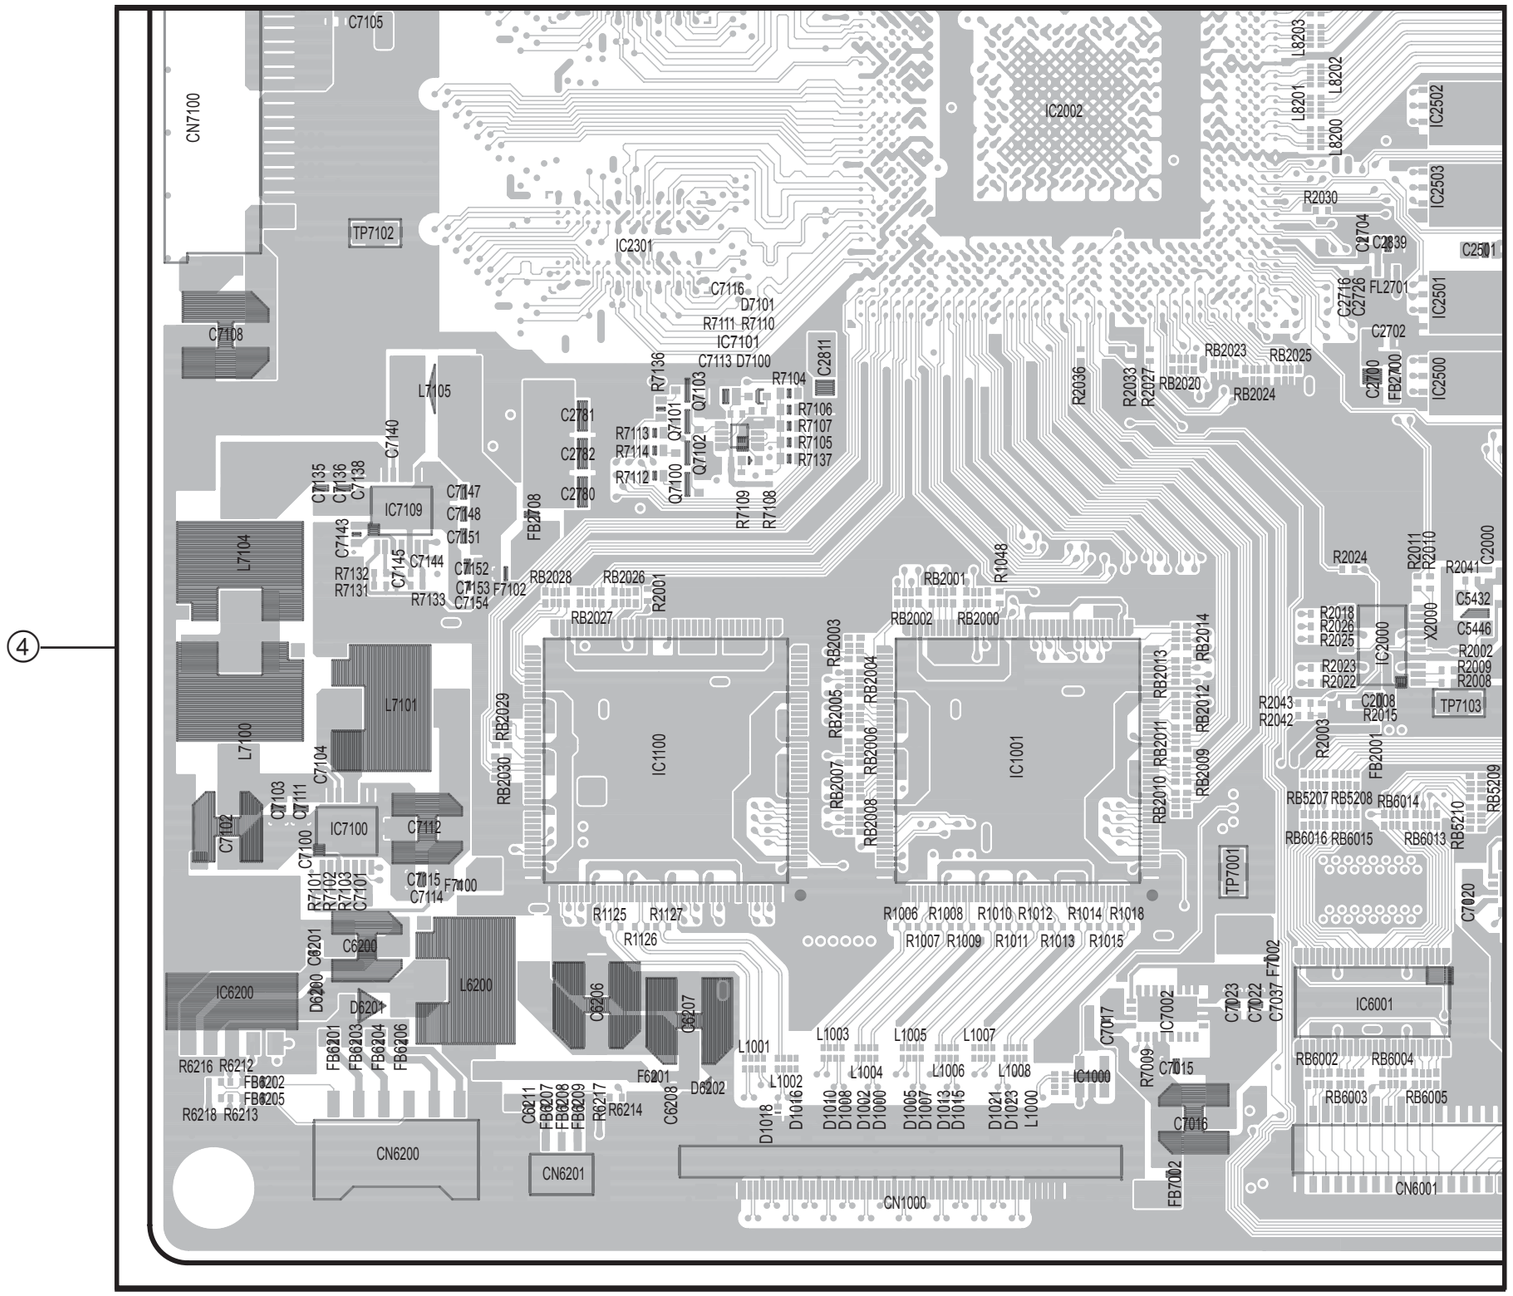


4

BC -A SIDE-
SUFFIX: -12

PVM-1741

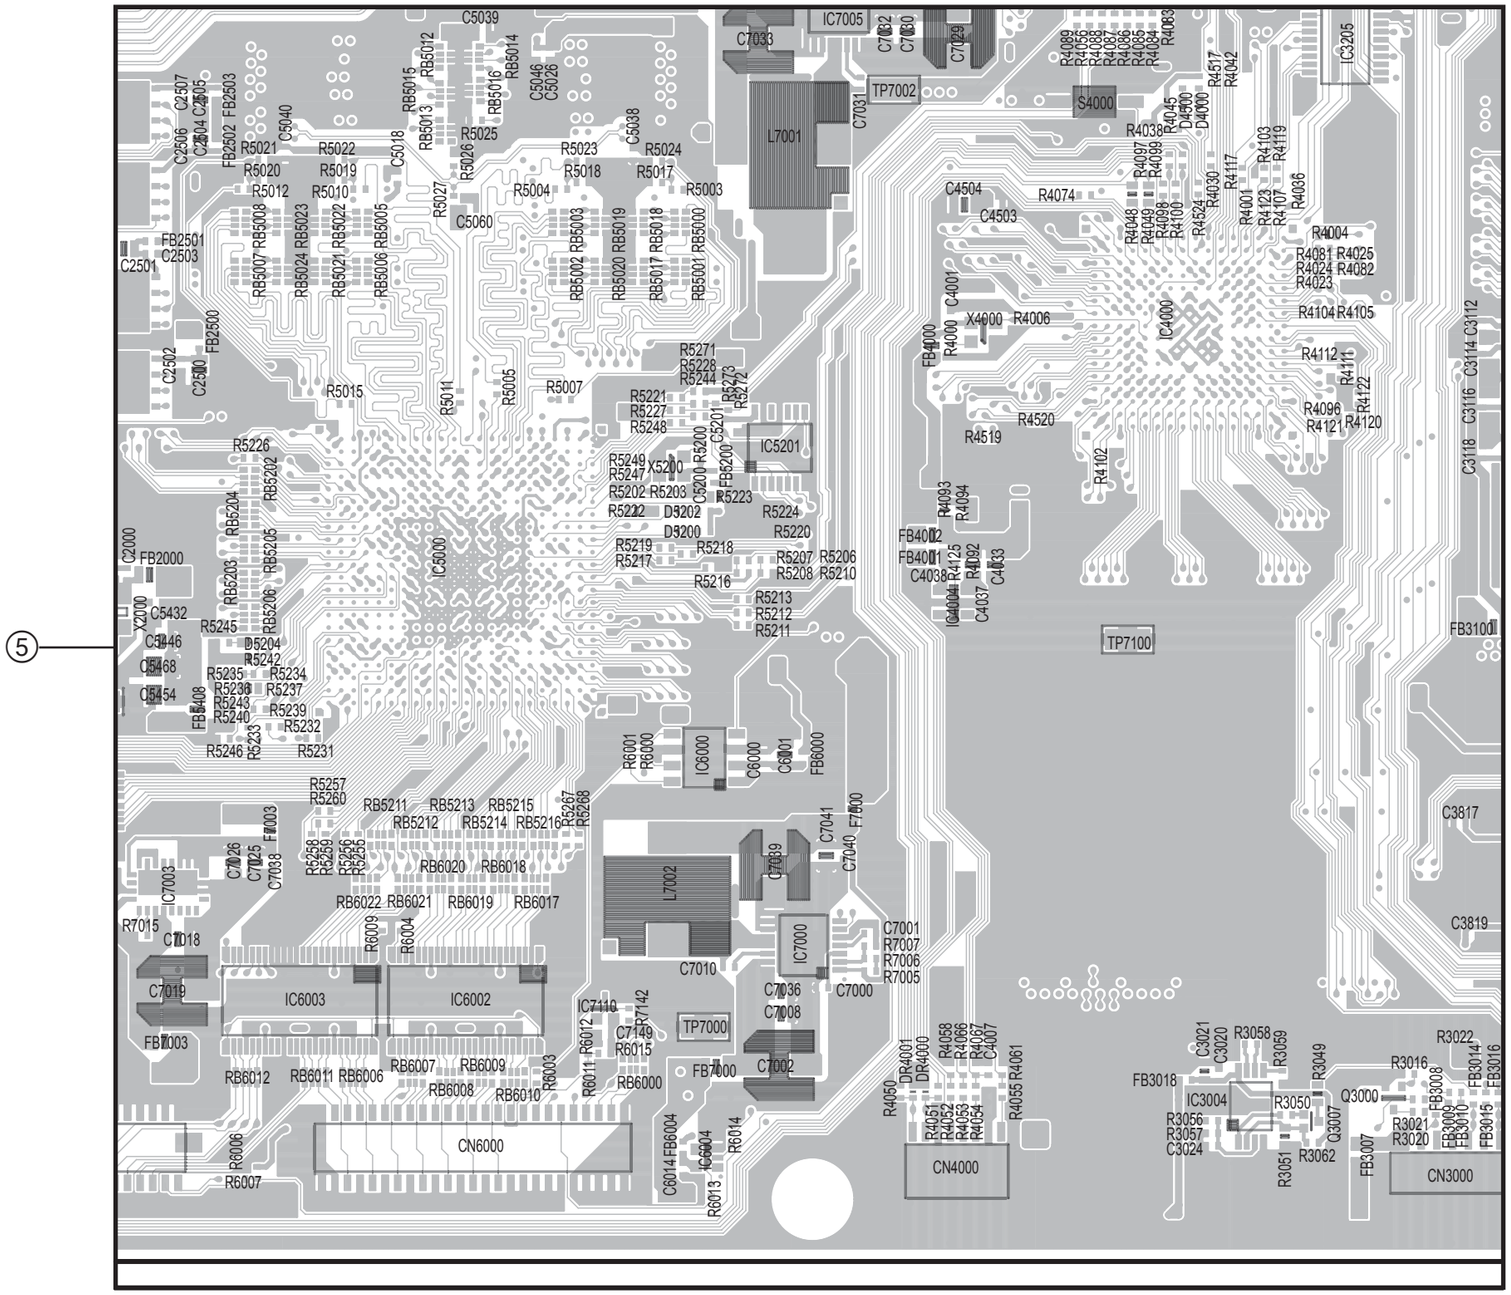

C5039
IC7005
C7033
C7032
C7030
C7029
TP7002
S4000
L7001
C7031
IC3205
C4504
C4503
R4074
IC4000
X4000
R4006
C4001
R4520
R4519
R4102
IC5201
X5200
D5204
R5242
D3202
D3200
R5218
R5216
R5224
R5220
R5207
R5206
R5208
R5210
R5213
R5212
R5211
TP7100
FB3100
IC6000
C6000
C6001
FB6000
R6001
R6000
C3817
C3819
L7002
C7041
C7040
C7039
C7010
C7000
C7001
R7007
R7006
R7005
IC7000
IC6003
IC6002
IC7110
TP7000
C7008
C7002
C7036
C7142
C7149
R6015
R6012
R6011
R6003
RB6000
FB7000
RB6012
RB6011
RB6006
RB6007
RB6009
RB6008
RB6010
CN6000
IC6004
R6014
C6014
FB6004
R6013
R6006
R6007
CN4000
CN3000
IC3004
Q3000
Q3007
FB3007
R3062
R3051
R3050
R3049
R3059
R3058
R3056
R3057
C3024
C3021
C3020
R3022
R3016
FB3018
FB3014
FB3016
FB3008
FB3009
FB3010
FB3015
R3021
R3020
R4058
R4066
R4067
C4007
R4061
R4055
R4050
R4051
R4052
R4053
R4054
DR4001
DR4000
R4093
R4094
FB4002
FB4001
C4038
R4125
R4092
C4033
C4037
IC4004
R4517
R4042
R4038
R4045
D4000
R4097
R4099
R4048
R4049
R4098
R4100
R4030
R4524
R4103
R4119
R4117
R4001
R4123
R4107
R4036
R4004
R4081
R4025
R4024
R4082
R4023
R4104
R4105
R4112
R4111
R4122
R4096
R4121
R4120
C3118
C3116
C3114
C3112
C2507
C2506
C2504
C2505
FB2502
FB2503
C5040
C5018
RB5015
RB5012
RB5013
RB5014
RB5016
C5046
C5026
C5038
R5025
R5026
R5027
R5021
R5022
R5020
R5019
R5012
R5010
R5023
R5024
R5018
R5017
R5004
R5003
C5060
FB2501
C2503
C2501
RB5007
RB5008
RB5024
RB5023
RB5021
RB5022
RB5006
RB5005
RB5002
RB5003
RB5020
RB5019
RB5017
RB5018
RB5001
RB5000
FB2500
C2502
C2500
R5015
R5011
R5005
R5007
R5271
R5228
R5244
R5273
R5272
R5221
R5227
R5248
C5201
C5200
R5200
FB5200
R5249
R5247
R5202
R5203
R5223
R5222
R5219
R5217
R5226
RB5202
RB5204
RB5205
RB6203
RB5206
C2000
FB2000
X2000
C5432
R5245
C5446
C5468
C5454
FB5408
R5235
R5234
R5236
R5237
R5243
R5240
R5239
R5233
R5232
R5246
R5231
R5257
R5260
RB5211
RB5213
RB5215
RB5212
RB5214
RB5216
R5267
R5268
F7003
C7026
C7025
C7038
R5258
R5259
R5256
R5255
RB6020
RB6018
RB6022
RB6021
RB6019
RB6017
IC7003
R7015
C7018
C7019
R6009
R6004
FB7003
5

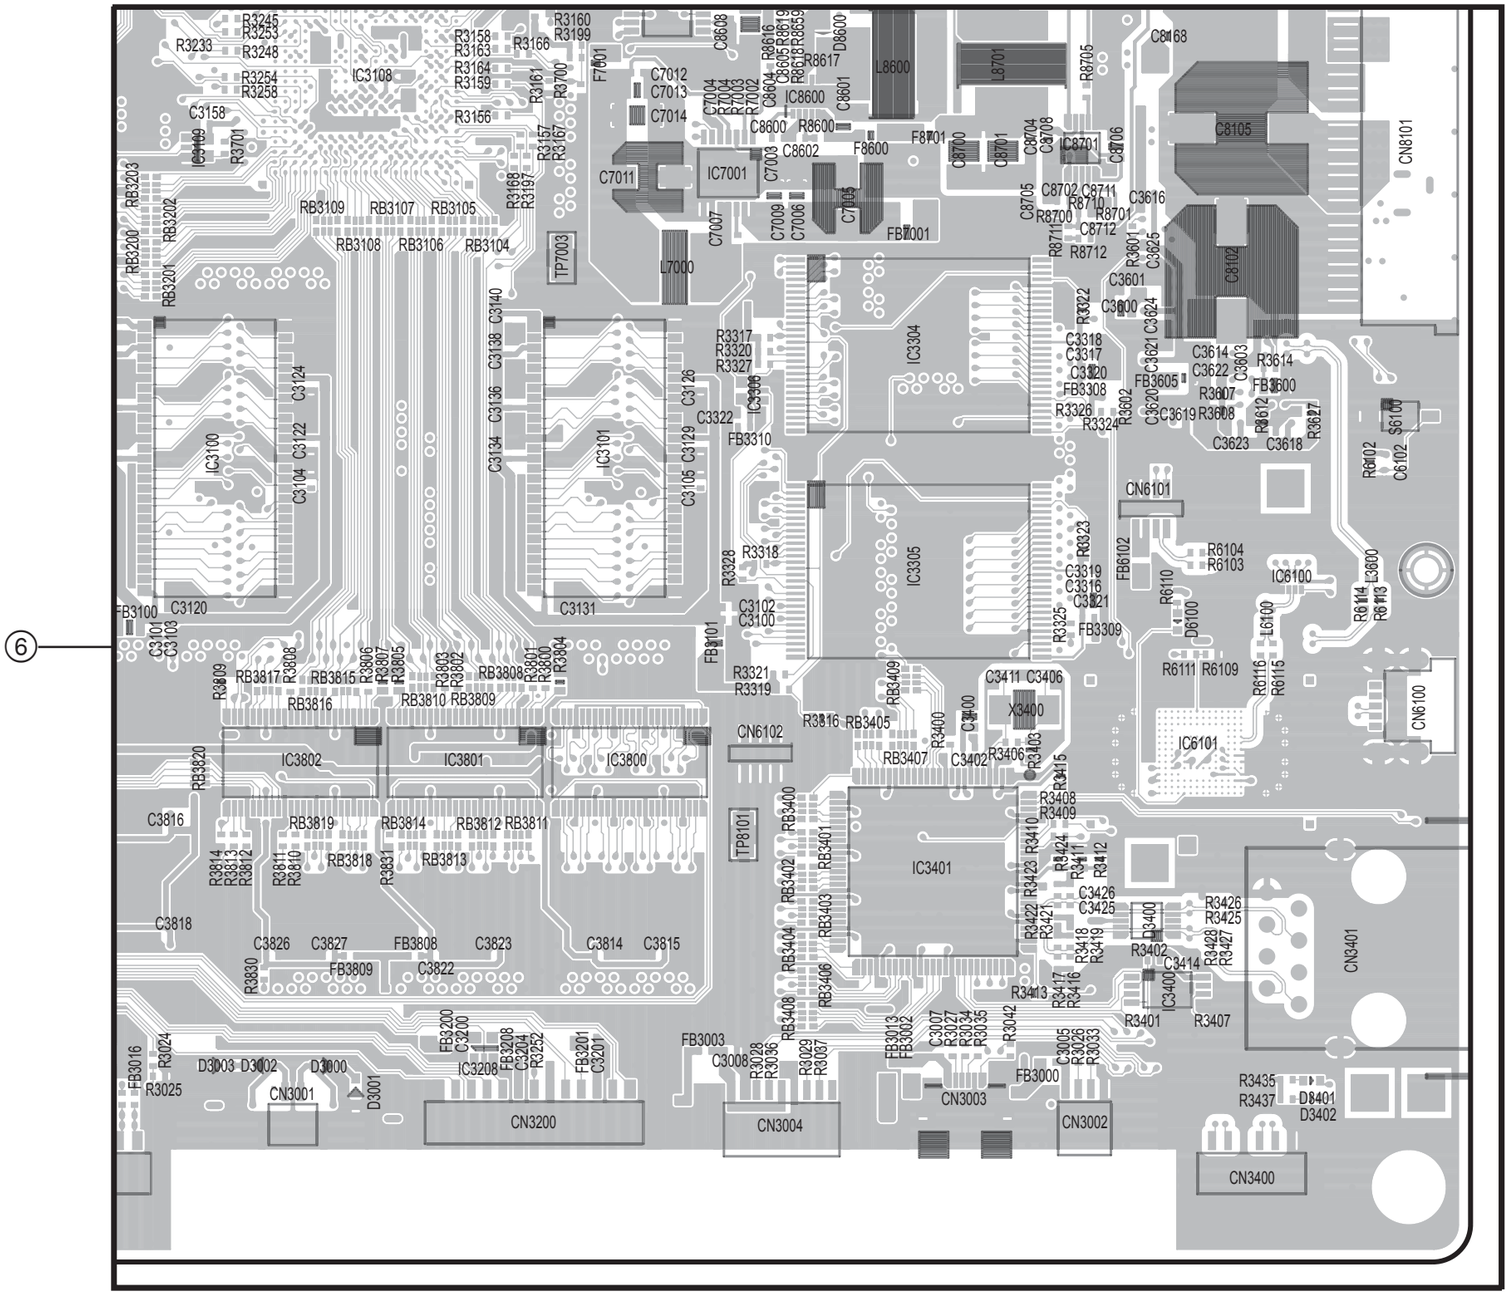
⑥
IC3108
IC7001
IC8600
IC8701
IC3100
IC3101
IC3304
IC3305
IC3306
IC3208
IC3802
IC3801
IC3800
IC3401
IC6101
IC6100
L8600
L8701
L7000
CN8101
CN6101
CN6102
CN6100
CN3200
CN3004
CN3003
CN3002
CN3001
CN3400
CN3401
X3400
TP7003
TP8101
FB7001
FB8600
FB3100
FB3101
FB3000
FB3003
FB3008
FB3309
FB3310
FB6102
C8105
C8102
C3131
C3120
C3140
C3136
C3134
C3138
C3124
C3122
C3104
C3103
C3126
C3322
C3129
C3105
C3102
C3100
C3816
C3818
C3826
C3827
C3823
C3822
C3814
C3815
C3830
C3158
C3109
C3159
C3160
C3161
C3162
C3163
C3164
C3165
C3166
C3167
C3168
C3169
C3170
C3171
C3172
C3173
C3174
C3175
C3176
C3177
C3178
C3179
C3180
C3181
C3182
C3183
C3184
C3185
C3186
C3187
C3188
C3189
C3190
C3191
C3192
C3193
C3194
C3195
C3196
C3197
C3198

① (Refer to page 8-10)

② (Refer to page 8-11)

③ (Refer to page 8-12)

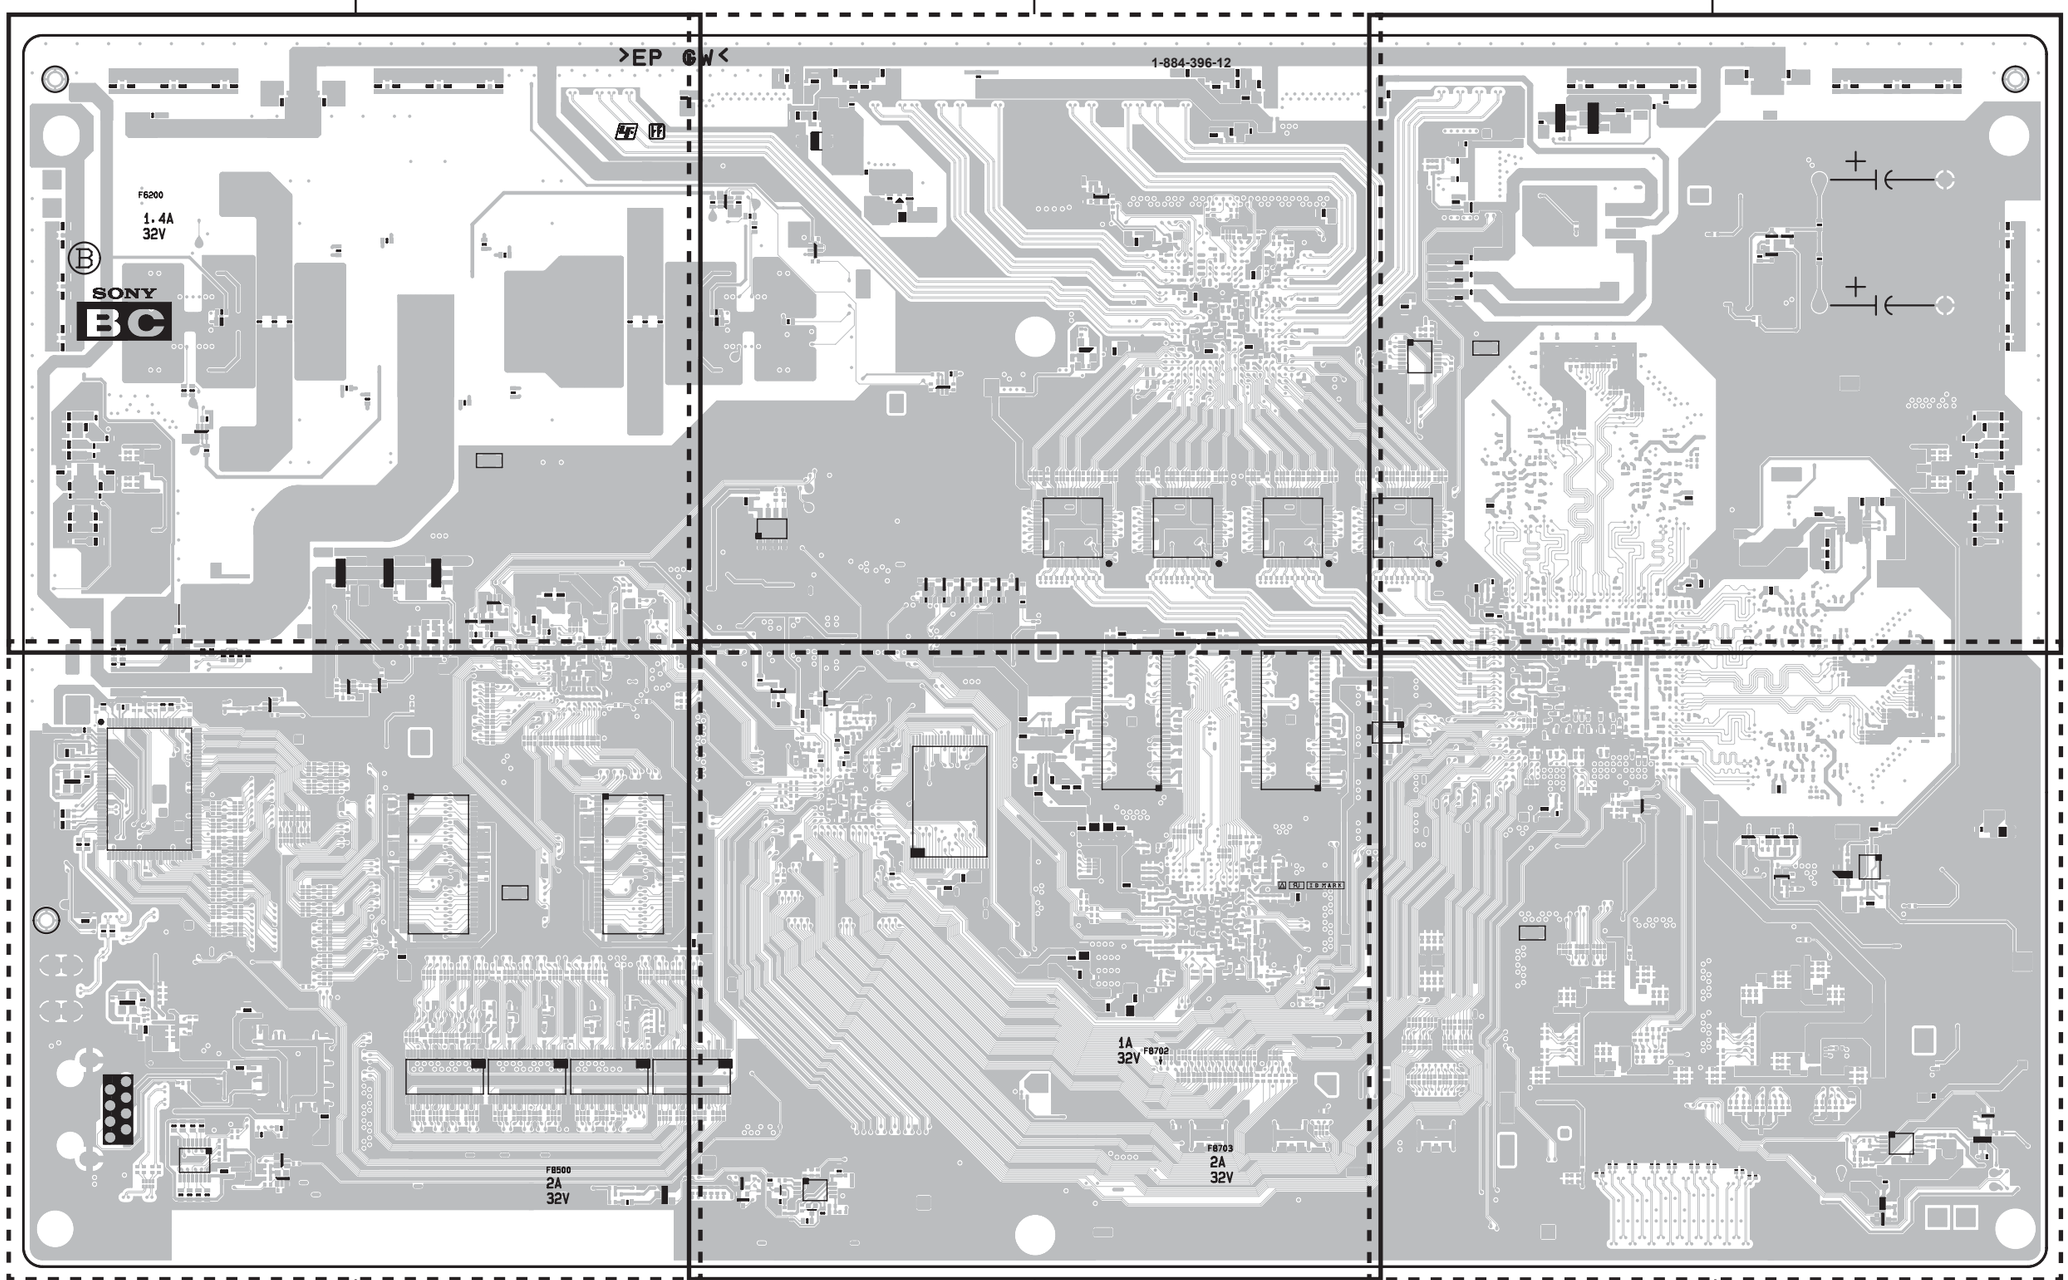


④ (Refer to page 8-13)

⑤ (Refer to page 8-14)


⑥ (Refer to page 8-15)

BC -B SIDE-
SUFFIX: -12

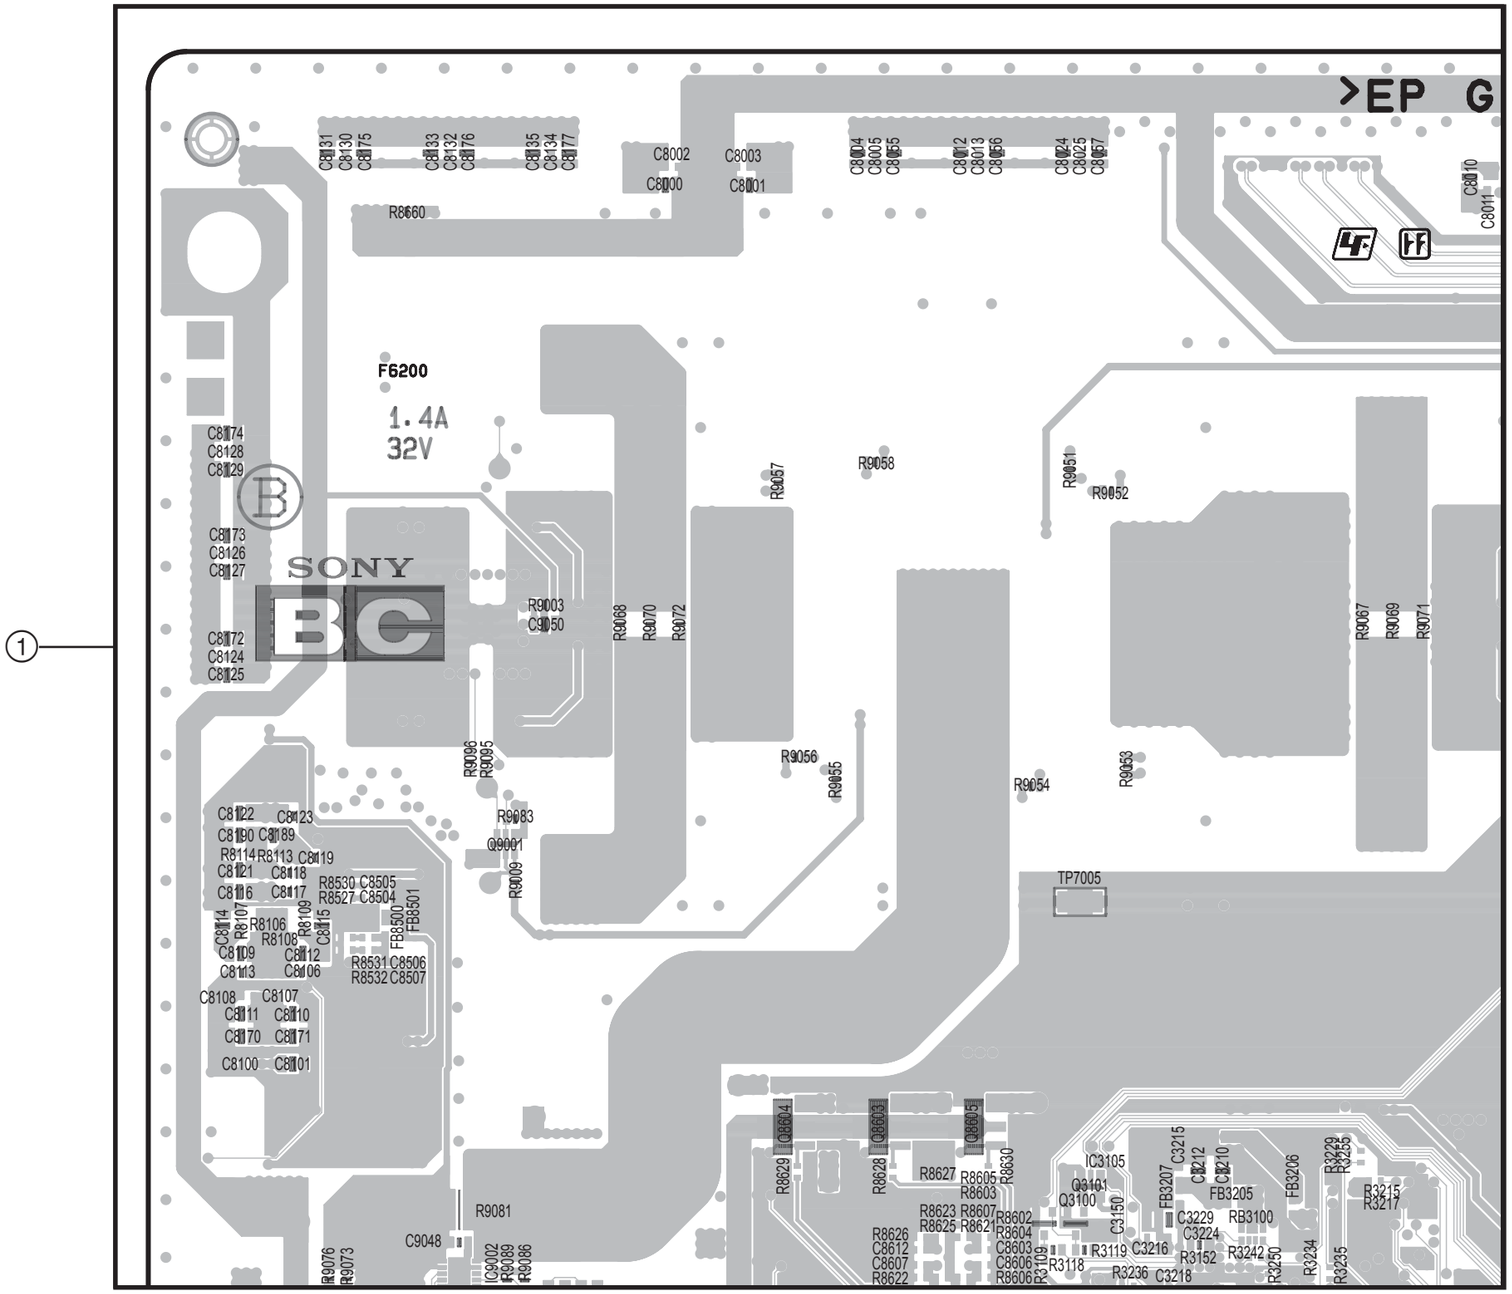


BC -B SIDE-
SUFFIX: -12

PVM-1741

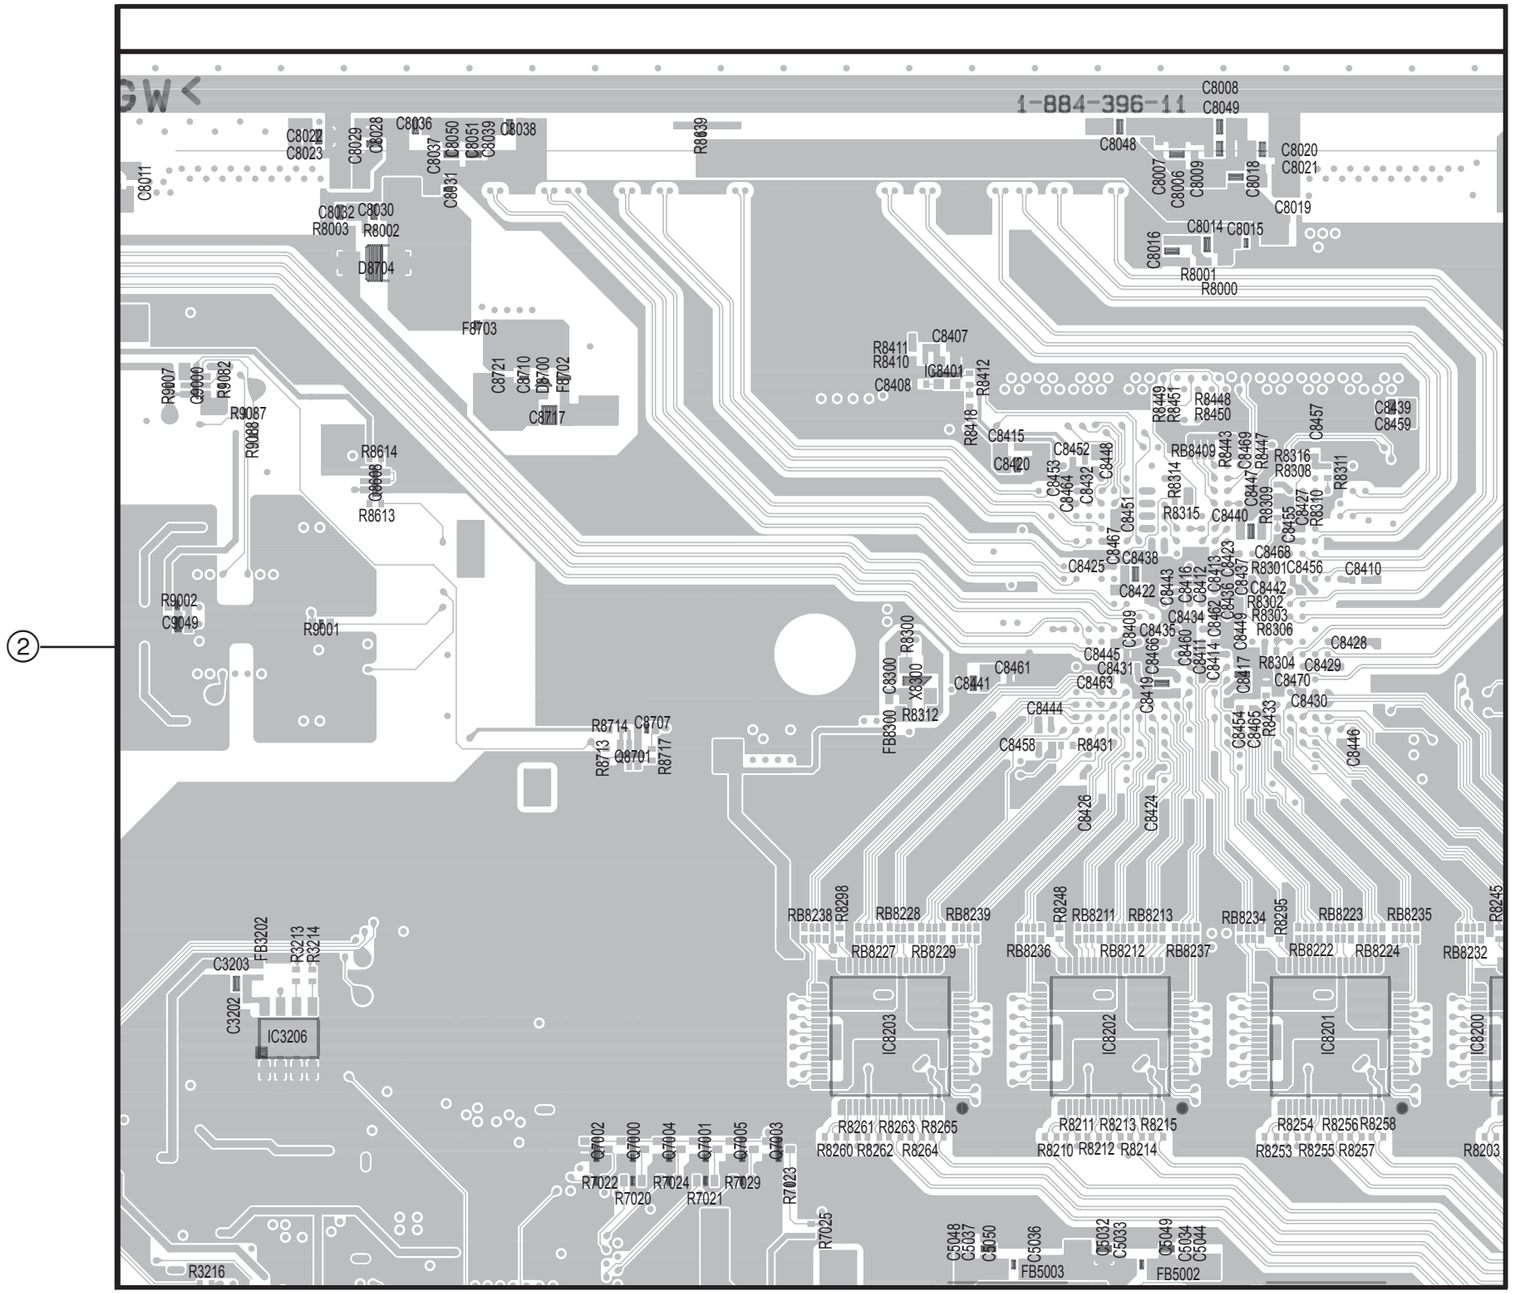



BC -B SIDE-
SUFFIX: -12

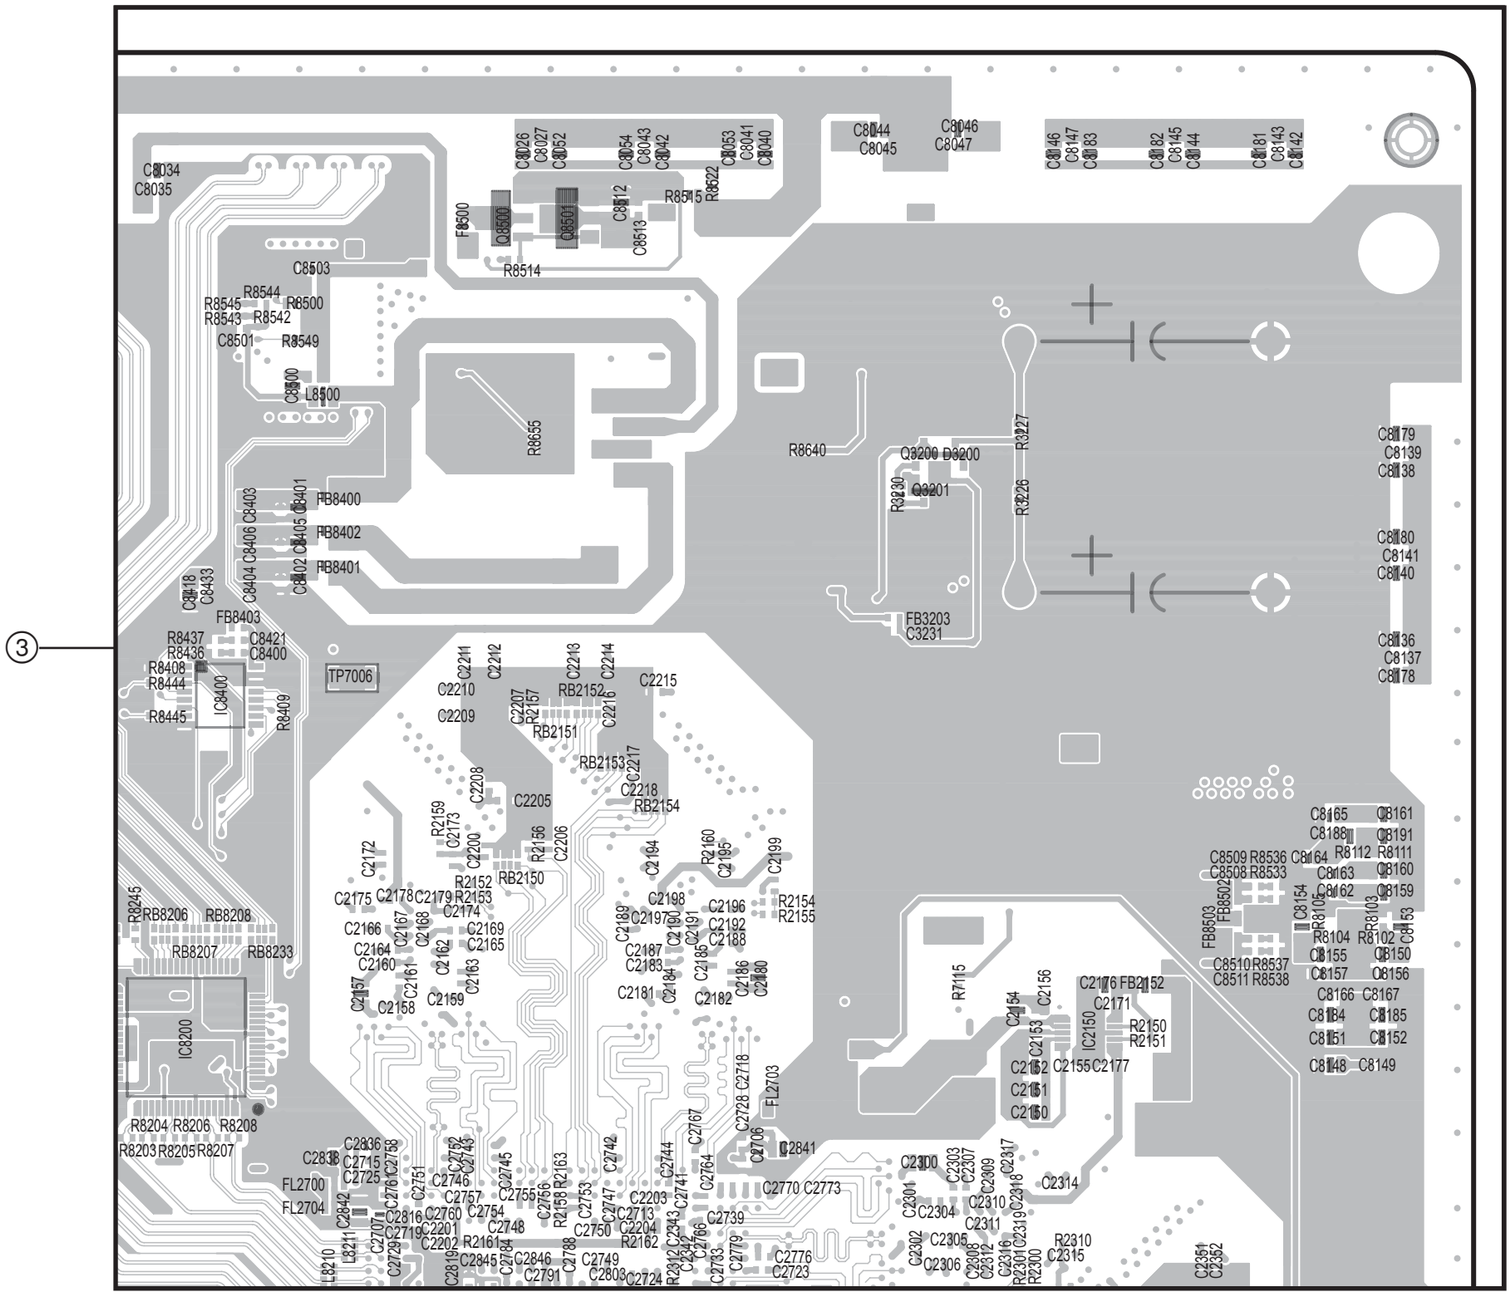


BC -B SIDE-
SUFFIX: -12

PVM-1741

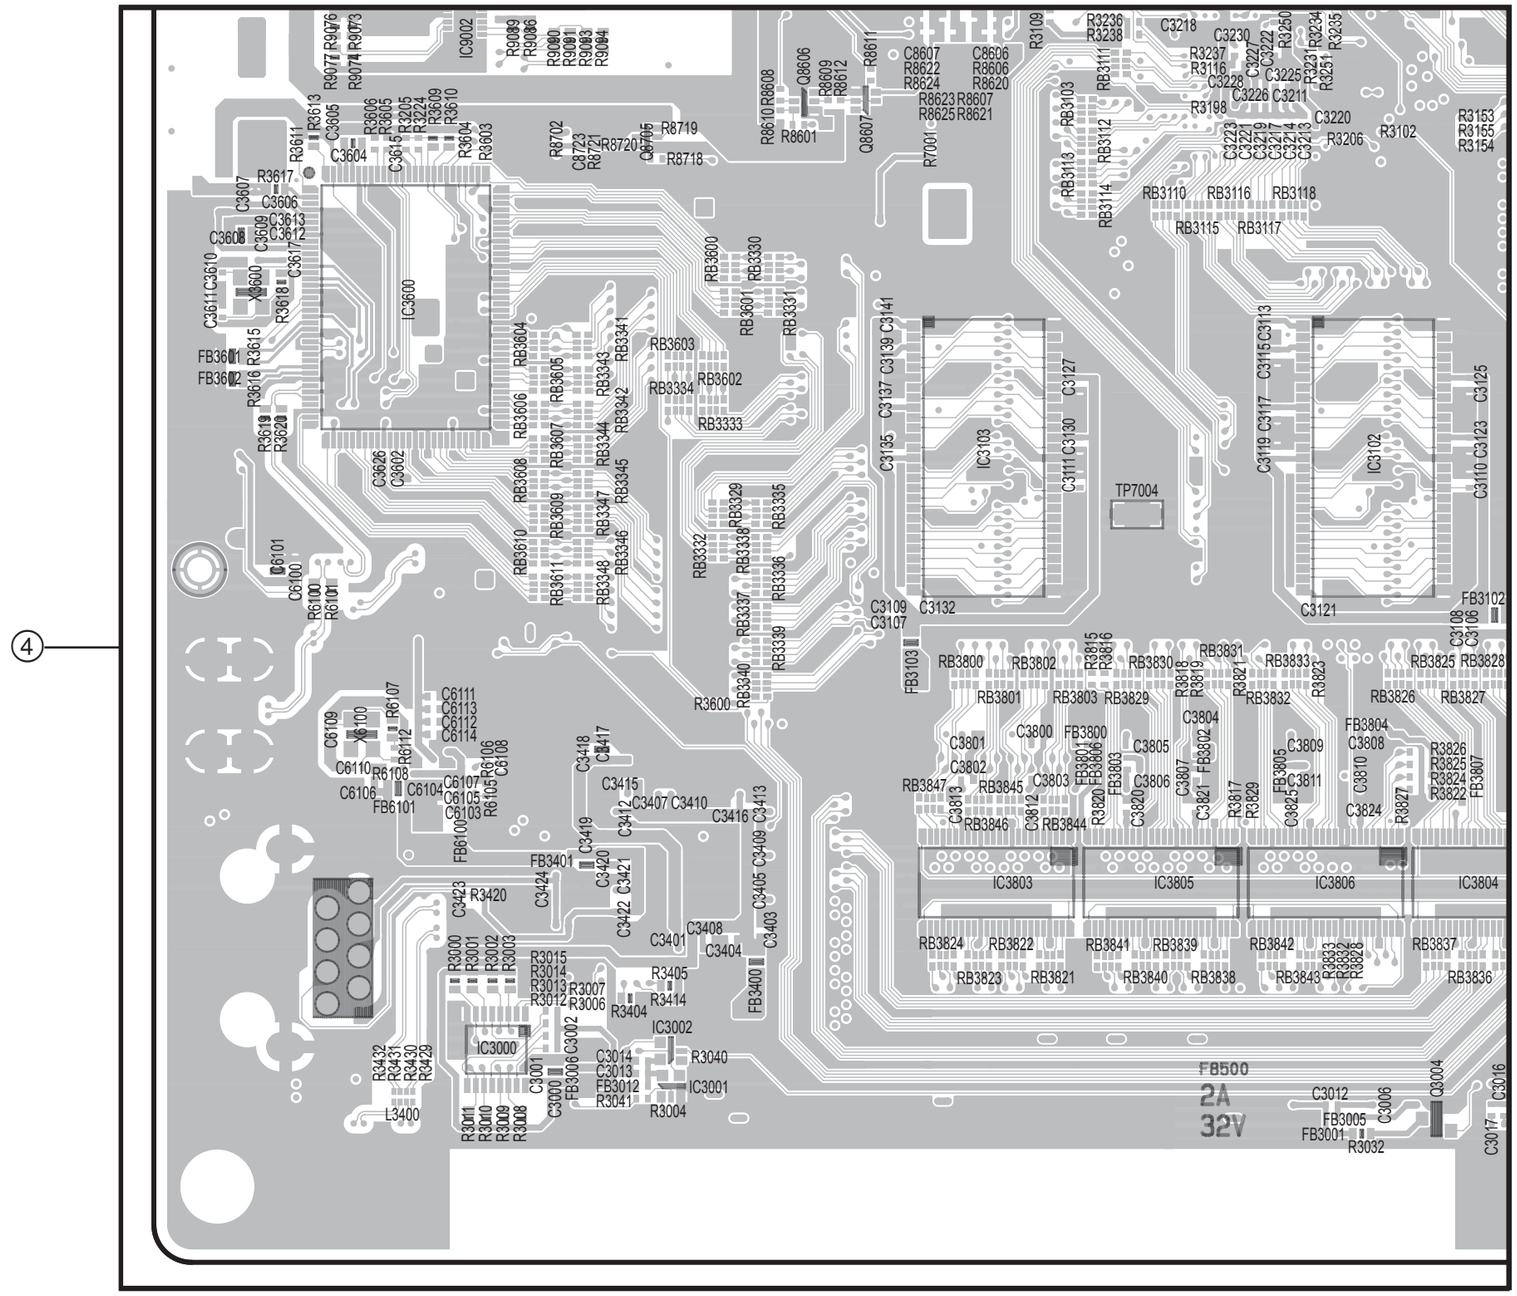
4
IC3600
IC3103
IC3102
IC3803
IC3805
IC3806
IC3804
IC3000
IC3002
IC3001
TP7004
F8500
2A
32V
R3600
L3400
Q8606
Q8607
Q3004
R7001
R8601
R8719
R8718
R8720
R8702
R8723
R8721
R8610
R8608
R8609
R8612
R8611
R8606
R8607
R8620
R8621
R8622
R8623
R8624
R8625
R3109
R3102
R3206
R3198
R3153
R3155
R3154
R3220
R3211
R3225
R3226
R3227
R3228
R3230
R3231
R3234
R3235
R3237
R3238
R3250
R3251
R3111
R3112
R3103
R3118
R3114
RB3110
RB3116
RB3118
RB3115
RB3117
RB3600
RB3330
RB3601
RB3331
RB3603
RB3334
RB3602
RB3333
RB3604
RB3605
RB3606
RB3607
RB3608
RB3609
RB3610
RB3611
RB3341
RB3343
RB3342
RB3344
RB3345
RB3347
RB3346
RB3348
RB3329
RB3335
RB3338
RB3332
RB3336
RB3337
RB3339
RB3340
C3141
C3139
C3137
C3135
C3127
C3130
C3111
C3132
C3109
C3107
C3113
C3115
C3117
C3119
C3125
C3123
C3110
C3121
FB3102
C3108
C3106
FB3103
RB3831
RB3800
RB3802
R3815
R3816
RB3830
R3818
R3819
R3821
RB3833
R3823
RB3825
RB3828
RB3801
RB3803
RB3829
RB3832
RB3826
RB3827
C3804
FB3804
C3808
C3800
FB3800
C3801
C3805
C3809
C3802
FB3801
FB3806
FB3803
FB3802
C3807
C3821
R3826
R3825
R3824
FB3807
RB3847
RB3845
C3803
C3806
C3820
R3820
R3817
R3829
FB3805
C3811
C3810
C3824
R3827
C3813
C3812
RB3846
C3
RB3844
RB3824
RB3822
RB3841
RB3839
RB3842
RB3837
RB3823
RB3821
RB3840
RB3838
RB3843
R3833
R3834
R3828
RB3836
C3012
FB3005
C3006
FB3001
R3032
C3017
C3016
C3600
C3602
C3626
C3604
C3615
C3605
C3606
C3607
C3608
C3609
C3613
C3612
C3617
C3610
C3611
X3600
R3618
R3615
FB3601
FB3602
R3616
R3619
R3620
R3611
R3613
R3606
R3605
R3205
R3224
R3609
R3610
R3604
R3603
R3617
C6101
C6100
R6101
R6100
C6111
C6113
C6112
C6114
R6107
C6109
X6100
R6112
C6110
R6108
C6106
C6104
C6107
C6105
R6106
R6105
C6103
C6108
FB6101
FB6100
C3418
C3417
C3415
C3407
C3410
C3412
C3416
C3413
C3419
C3420
C3421
C3422
C3424
C3423
R3420
FB3401
C3408
C3404
C3401
C3405
C3409
C3403
FB3400
R3405
R3414
R3404
R3000
R3001
R3002
R3003
R3015
R3014
R3013
R3012
R3007
R3006
C3002
C3001
C3000
FB3000
C3014
C3013
FB3012
R3041
R3040
R3004
R3432
R3431
R3430
R3429
R3011
R3010
R3009
R3008

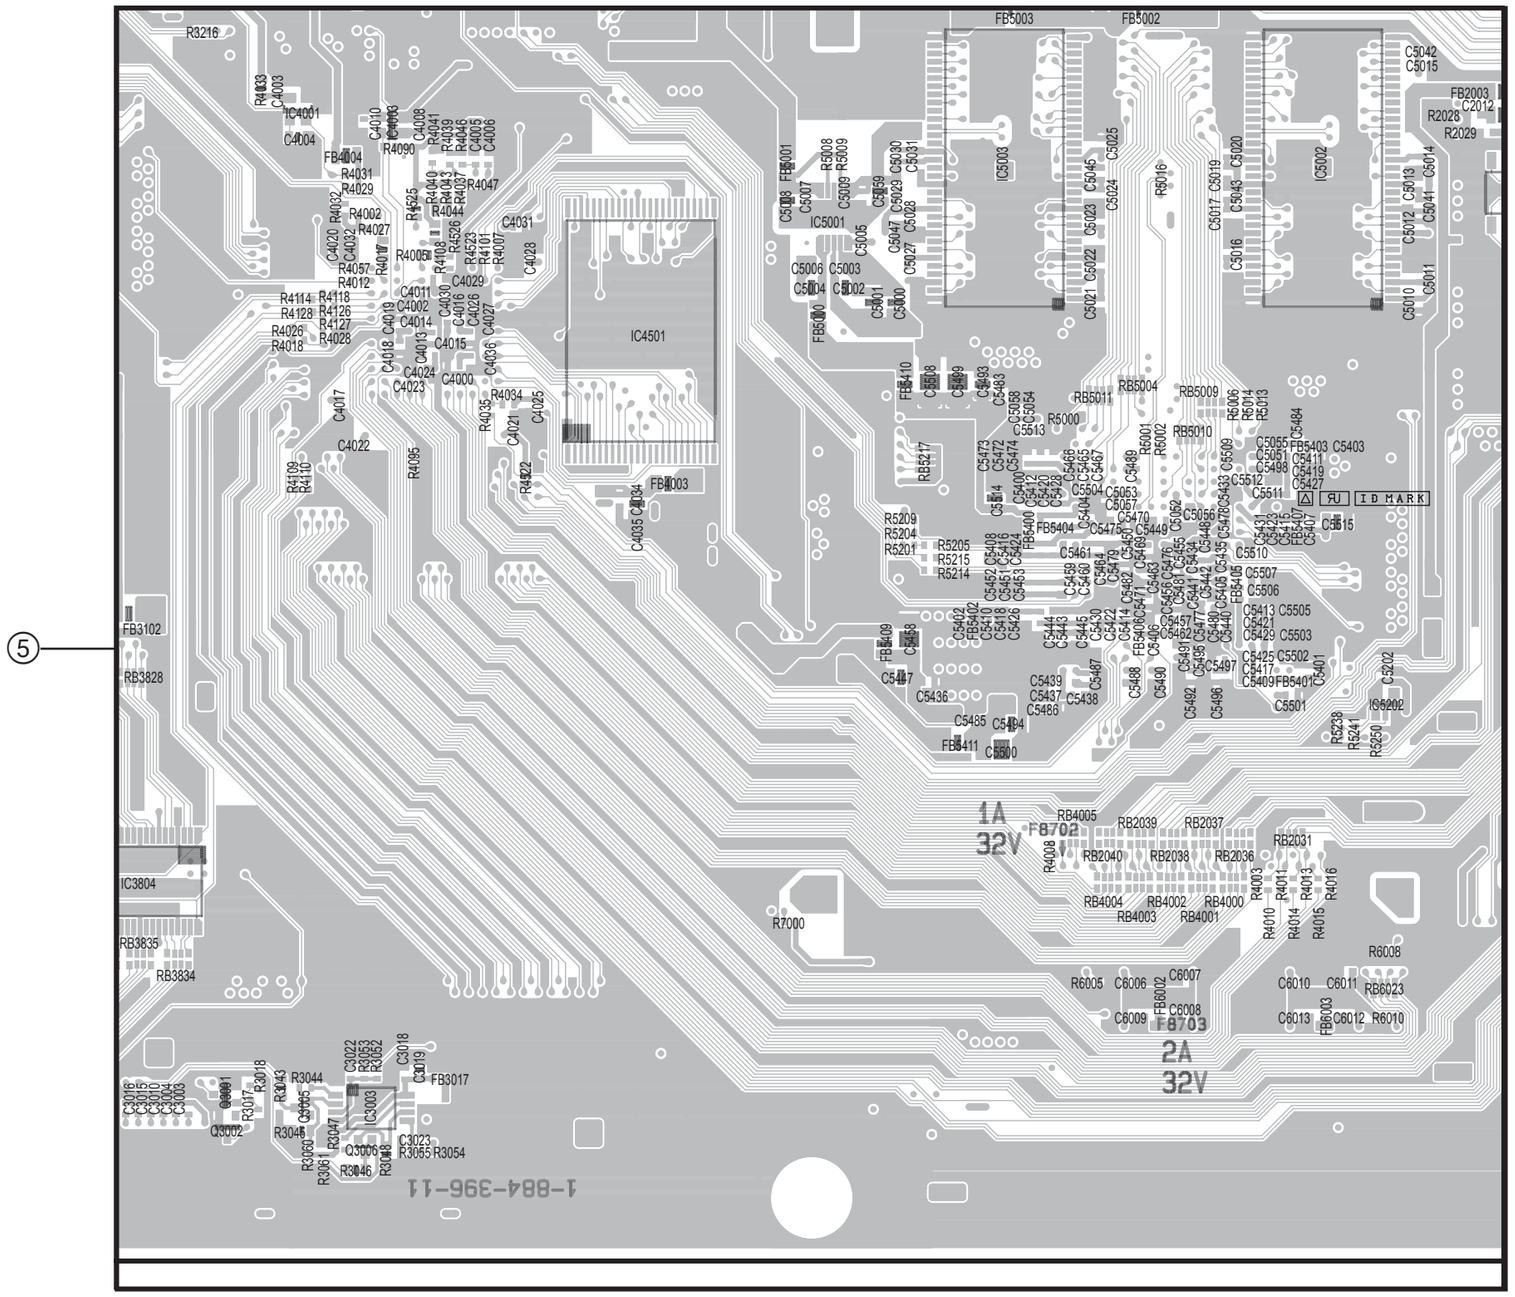
⑤
FB3102
RB3828
IC3804
RB3835
RB3834
IC4501
IC5001
IC5003
IC5002
FB5003
FB5002
FB4003
FB4004
FB5001
FB5400
FB5403
FB5404
FB5405
FB5406
FB5407
FB5408
FB5409
FB5410
FB5411
FB5412
FB5413
FB5414
FB5415
FB5416
FB5417
FB5418
FB5419
FB5420
FB5421
FB5422
FB5423
FB5424
FB5425
FB5426
FB5427
FB5428
FB5429
FB5430
FB5431
FB5432
FB5433
FB5434
FB5435
FB5436
FB5437
FB5438
FB5439
FB5440
FB5441
FB5442

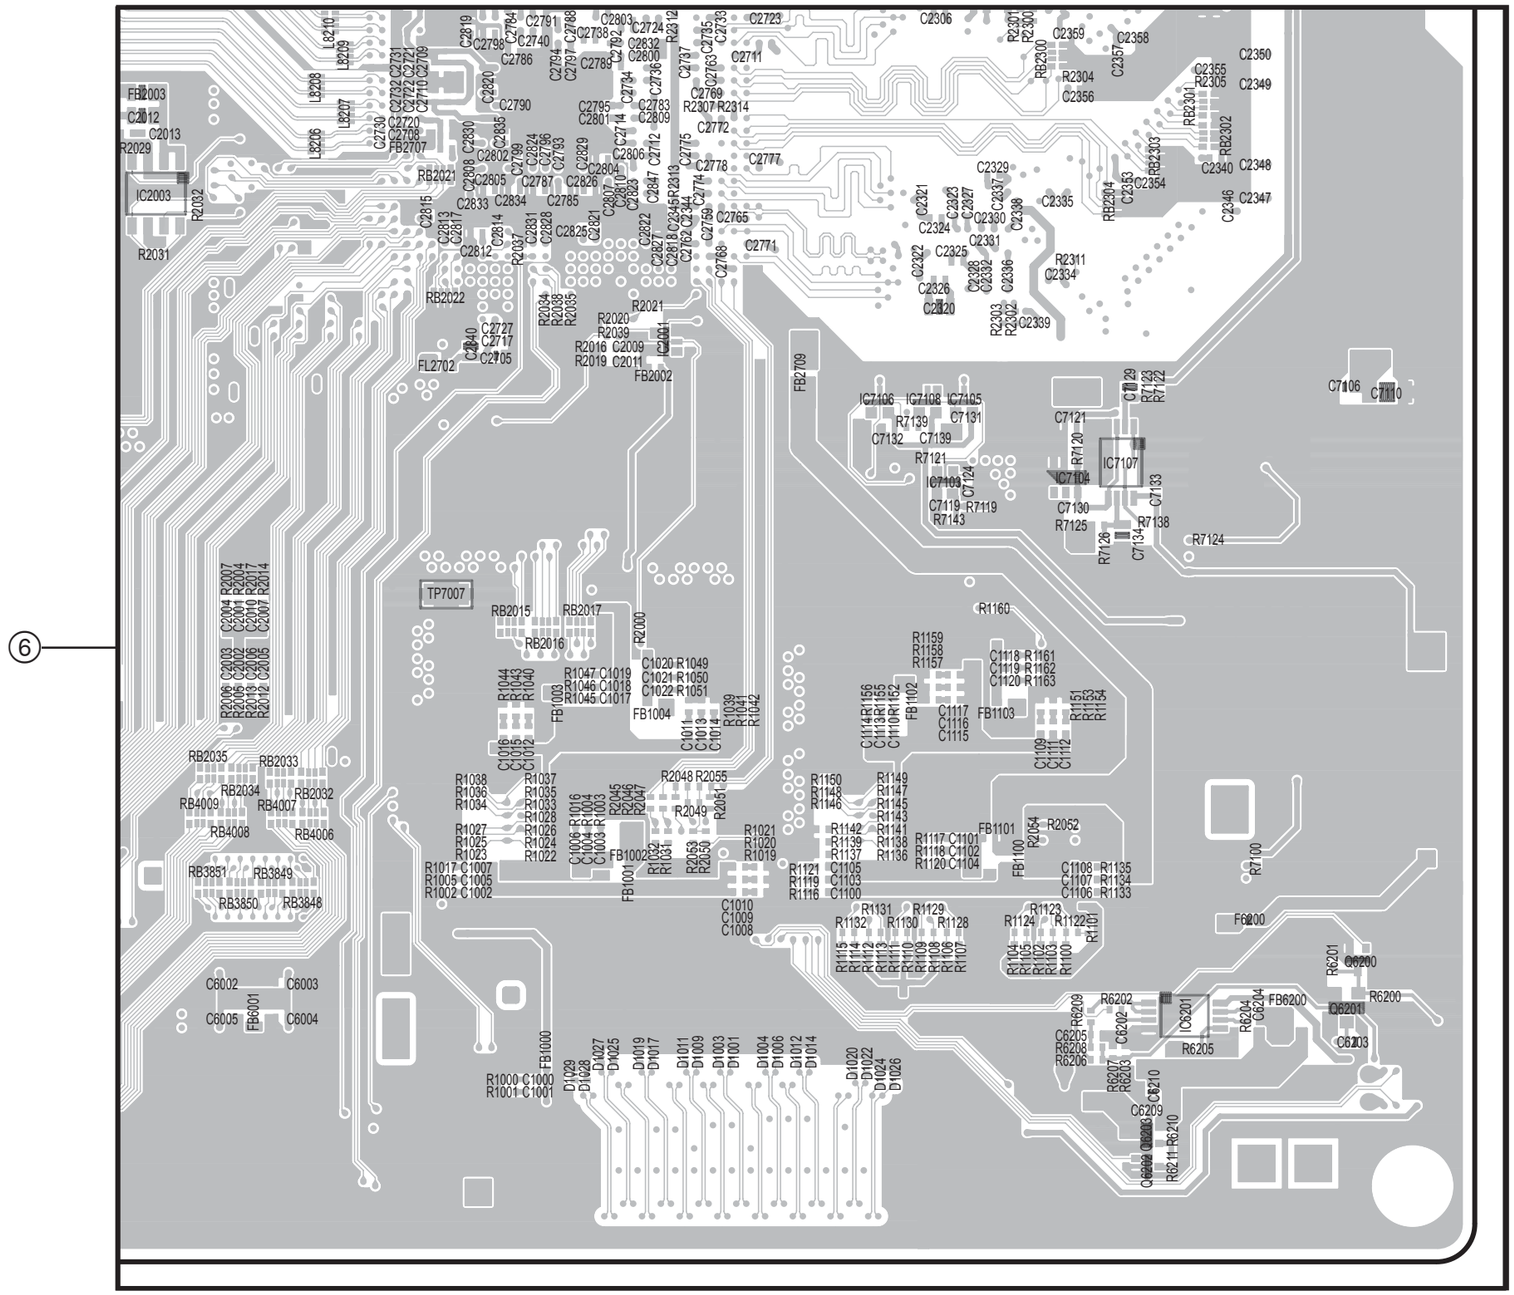
⑥
IC2003
IC7106
IC7107
IC7104
IC6201
TP7007
FB2709
FB2002
FB1004
FB1103
FB1101
FB1100
FB6200
FL2702
RB2022
RB2021
RB2015
RB2016
RB2017
RB2035
RB2033
RB2034
RB2032
RB4009
RB4007
RB4008
RB4006
RB3851
RB3849
RB3850
RB3848
R2029
R2032
R2031
R2709
R2000
R1160
R7100
R6200
R6202
R6205
C6002
C6003
C6005
C6004
FB6001
FB1000
C2306
C2358
C2359
C2350
C2349
C2355
C2356
C2329
C2340
C2348
C2346
C2347
C2335
C2354
C2311
C2334
C2326
C2339
C2325
C2324
C2331
C2330
C2322
C2336
C2777
C2778
C2771
C2765
C2769
C2772
C2711
C2723
C2727
C2717
C2705
C2790
C2786
C2791
C2740
C2738
C2724
C2737
C2763
C2735
C2733
C2712
C2775
C2774
C2714
C2734
C2736
C2783
C2809
C2795
C2801
C2720
C2730
C2708
C2731
C2732
C2722
C2721
C2710
C2709
C2820
C2819
C2798
C2784
C2792
C2803
C2832
C2600
C2789
C2794
C2797
C2788
C2802
C2805
C2787
C2826
C2785
C2833
C2834
C2829
C2804
C2806
C2847
C2824
C2796
C2793
C2799
C2807
C2810
C2823
C2822
C2827
C2818
C2762
C2344
C2345
C2768
C2769
C2766
C2767
C2812
C2813
C2811
C2815
C2814
C2831
C2828
C2825
C2821
C2808
C2800
C2835
C2837
C2327
C2323
C2321
C2338
C2385
C2352
C2353
C2303
C2304
C2305
C2301
C2300
C2357
C2339
C2320
C2340
C2341
C2342
C2343
C2344
C2345
C2346
C2347
C2348
C2349
C2350
C2351
C2352
C2353
C2354
C2355
C2356
C2357
C2358
C2359
C2360
C2361
C2362
C2363
C2364
C2365
C2366
C2367
C2368
C2369
C2370
C2371
C2372
C2373
C2374
C2375
C2376
C2377
C2378
C2379

PVM-1741 (CN)
PVM-1741 (SY)
PVM-1741A (CN)
PVM-1741A (SY) J, E
9-968-848-04

Sony Corporation

Printed in Japan
2013. 9 32
©2011