


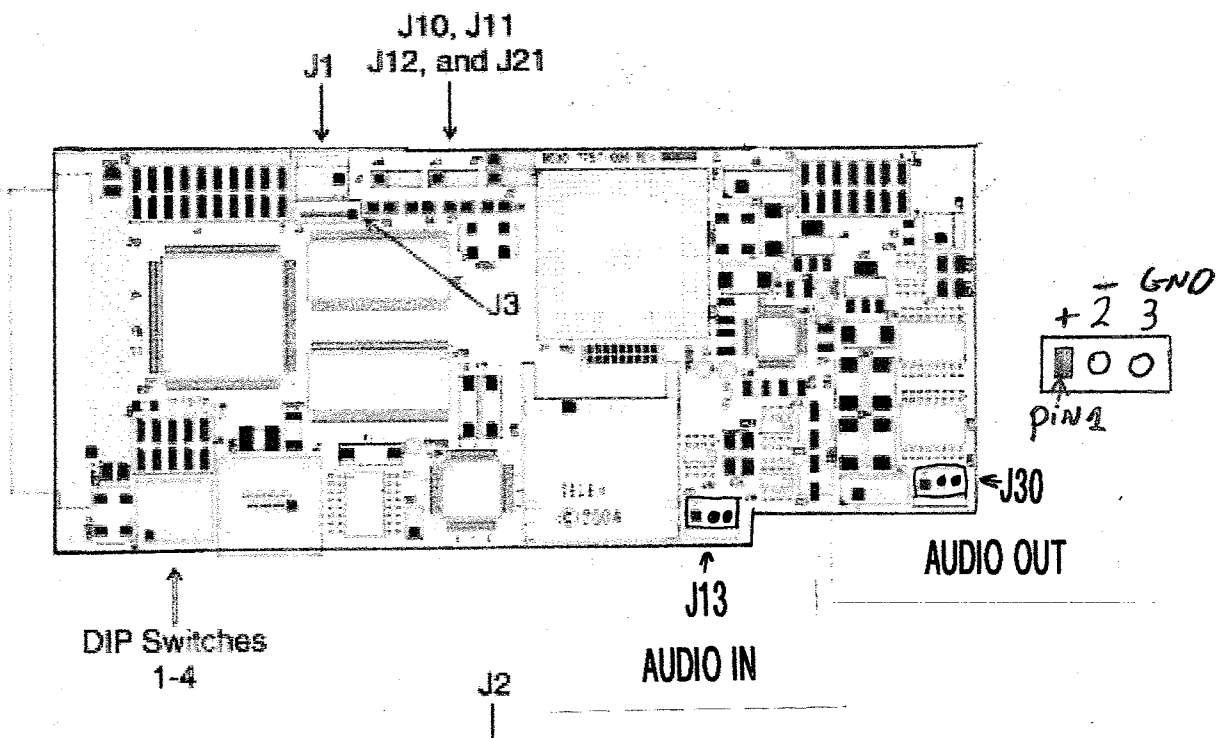

GPI Module Connectors (Optional)

Aux 1 In (Auxiliary program input 1)

RVON CH2 IN

Type: 3-pin female XLR
 Pin-out: Pin 1: Ground
 Pin 2: Input +
 Pin 3: Input -

TO J13

PIN 1-RVON1-3
 PIN 2 -RVON1 PIN1
 PIN 3 -RVON1 PIN2

Aux 2 In (Auxiliary program input 2)

RVON CH2 OUT

Type: 3-pin female XLR
 Pin-out: Pin 1: Ground
 Pin 2: Input +
 Pin 3: Input -

TO J30

PIN 1-RVON1-3
 PIN 2 -RVON1 PIN1
 PIN 3 -RVON1 PIN2

Notes Balanced input, +8dBu nominal

RVON1 TO RC AUX1/2 KP32

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.