SONY

SWITCHER PROCESSOR PACK

MVS-8000X-C
MVS-7000X-C

MULTI FORMAT SWITCHER PROCESSOR

MVS-8000X
MVS-7000X

HK-PSU05

MKS-7171X
MKS-7210X
MKS-7470X
MKS-7471X
MKS-8110X
MKS-8160X
MKS-8170X
MKS-8180X
MKS-8210X
MKS-8440X
MKS-8450X

MAINTENANCE MANUAL

1st Edition (Revised 2)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

MVS-8000X (SY)	Serial No. 10001 and Higher
MVS-7000X (SY)	Serial No. 10001 and Higher
HK-PSU05 (SY)	Serial No. 10001 and Higher
MKS-8110X (SY)	Serial No. 10001 and Higher
MKS-8160X (SY)	Serial No. 10001 and Higher
MKS-8170X (SY)	Serial No. 10001 and Higher
MKS-8180X (SY)	Serial No. 10001 and Higher
MKS-8210X (SY)	Serial No. 10001 and Higher
MKS-8440X (SY)	Serial No. 10001 and Higher
MKS-8450X (SY)	Serial No. 10001 and Higher
MKS-7171X (SY)	Serial No. 10001 and Higher
MKS-7210X (SY)	Serial No. 10001 and Higher
MKS-7470X (SY)	Serial No. 10001 and Higher
MKS-7471X (SY)	Serial No. 10001 and Higher

Attention-when the product is installed in Rack:

1. Prevention against overloading of branch circuit
When this product is installed in a rack and is supplied power from an outlet on the rack, please make sure that the rack does not overload the supply circuit.

2. Providing protective earth
When this product is installed in a rack and is supplied power from an outlet on the rack, please confirm that the outlet is provided with a suitable protective earth connection.

3. Internal air ambient temperature of the rack
When this product is installed in a rack, please make sure that the internal air ambient temperature of the rack is within the specified limit of this product.

4. Prevention against achieving hazardous condition due to uneven mechanical loading
When this product is installed in a rack, please make sure that the rack does not achieve hazardous condition due to uneven mechanical loading.

5. Install the equipment while taking the operating temperature of the equipment into consideration
For the operating temperature of the equipment, refer to the specifications of the Operation Manual.

6. When performing the installation, keep the following space away from walls in order to obtain proper exhaust and radiation of heat.
Front, Right and Left: 10 cm (4 inches) or more.

CAUTION

- For safety, do not connect the connector for peripheral device wiring that might have excessive voltage to the following ports.
  : NETWORK A (CTRL) connector
  : NETWORK B (DATA) connector
  : NETWORK C* connector (MVS-8000X only)
  : FM DATA connector
  Follow the instructions for the above port(s).
- When you connect the NETWORK A (CTRL), NETWORK B (DATA), NETWORK C* (MVS-8000X only), and FM DATA connectors of the unit to peripheral device, use a shielded-type cable to prevent malfunction due to radiation noise.

* Not supported.

注意

- 安全のために，周辺機器を接続する際は，過大電流を持つ可能性があるコネクターを以下のポートに接続しないでください。
  ：NETWORK A (CTRL) コネクター
  ：NETWORK B (DATA) コネクター
  ：NETWORK C* コネクター (MVS-8000Xのみ)
  ：FM DATA コネクター
  上記のポートについては本書の指示に従ってください。
- NETWORK A (CTRL), NETWORK B (DATA), NETWORK C* (MVS-8000Xのみ), FM DATAコネクターを使用の際は，輻射ノイズによる誤動作を防ぐため，シールドタイプのケーブルを使用してください。

* これらは，現在サポートされていません。

Table of Contents

Manual Structure

Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)

1. Service Overview

1-1. Location of Main Parts ..... 1-1 (E)
1-1-1. MVS-8000X ..... 1-1 (E)
1-1-2. MVS-7000X ..... 1-4 (E)
1-2. Replacement of Main Parts ..... 1-7 (E)
1-2-1. Removing/Installing the Front Panel ..... 1-7 (E)
1-2-2. Power Supply Unit ..... 1-8 (E)
1-2-3. Fan ..... 1-9 (E)
1-3. Periodic Check and Replacement ..... 1-10 (E)
1-3-1. Periodic Check/Replacement Parts ..... 1-10 (E)
1-3-2. Cleaning the Fans ..... 1-10 (E)
1-4. Tools ..... 1-11 (E)
1-5. Fuse/IC Link ..... 1-11 (E)
1-6. Lead-free Solder ..... 1-13 (E)
1-7. Using Extension Boards ..... 1-14 (E)
1-8. Circuit Description ..... 1-16 (E)
1-9. Maintenance Menu ..... 1-23 (E)
1-9-1. Calling the Maintenance Menu ..... 1-23 (E)
1-9-2. Maintenance Main Menu ..... 1-24 (E)
1-9-3. Maintenance Latest Error Menu ..... 1-25 (E)
1-9-4. Maintenance Circuit Board Menu ..... 1-26 (E)
1-9-5. Maintenance PSU Menu ..... 1-27 (E)
1-9-6. Maintenance Fan Menu ..... 1-29 (E)
1-9-7. Error Indication and Action ..... 1-30 (E)

2. Spare Parts

2-1. Notes on Repair Parts 2-1
2-2. Exploded Views 2-2
2-3. Electrical Parts List 2-23
2-4. Supplied Accessories 2-432

3. Block Diagrams

Overall MVS-8000X 3-2
MVS-7000X 3-3
CA-82 3-4
CA-82A 3-4
DVP-53 3-5
FC-112 3-7
MIX-53 SUFFIX: -13 3-8
SUFFIX: -14 ..... 3-8 (a)
MY-118 3-10
OUT-35 3-11
OUT-35A 3-11
SG-272A 3-13
SIO-26A 3-13
XPT-31/31A 3-14
XPT-32 3-15

4. Schematic Diagrams

CA-82 SUFFIX-13 4-3
SUFFIX-14 ..... 4-3 (a)
CA-82A 4-45
CN-3233 4-87
CN-3233A 4-91
CN-3234 4-95
CNI-37 SUFFIX-11 4-99
SUFFIX-12 ..... 4-99 (a)
CNI-37A SUFFIX-11 4-109
SUFFIX-12 ..... 4-109 (a)
CNO-37 SUFFIX-11 4-119
SUFFIX-12 ..... 4-119 (a)
CNO-38 SUFFIX-11 4-127
SUFFIX-12 ..... 4-127 (a)
CNO-38A SUFFIX-11 4-134
SUFFIX-12 ..... 4-134 (a)
CNO-38B SUFFIX-11 4-141
SUFFIX-12 ..... 4-141 (a)
HN-364 SUFFIX-11 4-148
SUFFIX-12 4-148

HN-365 4-149
HN-366 4-150
MB-1150 4-151
MB-1151 4-171
MIX-53 SUFFIX-13 4-187
SUFFIX-14 ..... 4-187 (a)
OUT-35 4-235
OUT-35A 4-280
SG-272A 4-325
SIO-26A 4-328
XPT-31/31A SUFFIX-13 4-333
SUFFIX-14 ..... 4-333 (a)
XPT-32 4-351
CN-3235 4-364
DVP-53 4-370
FC-112 4-424
MY-118 4-464
Frame Wiring MVS-8000X 4-512
MVS-7000X 4-514

5. Board Layouts

CA-82 SUFFIX-13 5-2
CA-82/82A SUFFIX-14 ..... 5-2 (a)
CN-3233/3233A 5-6
CN-3234 5-8
CNI-37/37A SUFFIX-11 5-10
SUFFIX-12 ..... 5-10 (a)
CNO-37 SUFFIX-11 5-12
SUFFIX-12 ..... 5-12 (a)
CNO-38/38A/38B SUFFIX-11 5-14
SUFFIX-12 ..... 5-14 (a)
HN-364 SUFFIX-11 5-17
SUFFIX-12 5-17
HN-365 5-17
HN-366 5-17
MB-1150 5-18
MB-1151 5-20
MIX-53 SUFFIX-13 5-22
SUFFIX-14 ..... 5-22 (a)
OUT-35/35A 5-28
SG-272A 5-33
SIO-26A 5-35
XPT-31/31A SUFFIX-13 5-36
SUFFIX-14 ..... 5-36 (a)
XPT-32 5-40
CN-3235 5-44
DVP-53 5-46
FC-112 5-52
MY-118 5-58

Manual Structure

Purpose of this manual

This manual is the maintenance manual of Switcher Processor Pack MVS-8000X-C/MVS-7000X-C and their optional boards and units.
This manual is intended for use by trained system and service engineers, and provides the information of maintenance and detailed service (parts replacement, exploded views, detailed parts list, schematic diagrams, and board layouts).

Related manuals

The following manuals are prepared for MVS-8000X-C/MVS-7000X-C and their optional boards and units.

- **Operation Manual (Supplied with MVS-8000X-C/MVS-7000X-C)**
  This manual describes the application and operation of MVS-8000X-C/MVS-7000X-C.

- **System Setup Manual (Available on request)**
  This manual describes the information that is required to connect the MVS-8000X/MVS-7000X/MVE-9000/MKS-8700/CCP-8000 to the MVS-8000 system, and to start up the system.
  If this manual is required, please contact your local Sony Sales Office/Service Center.

- **Installation Manual (Supplied with MVS-8000X-C/MVS-7000X-C)**
  This manual describes the information on installing the MVS-8000X-C/MVS-7000X-C.

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in this unit.
  This manual contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-06

Section 1
Service Overview

1-1. Location of Main Parts

1-1-1. MVS-8000X

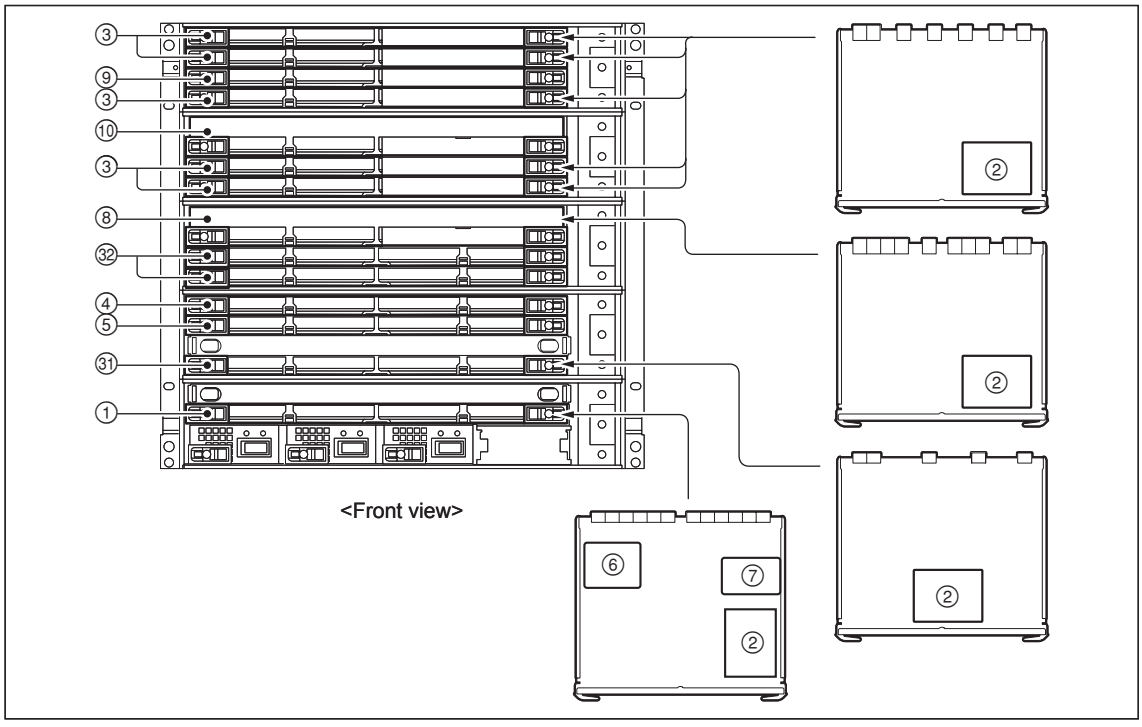

No.	Name	Function	Remarks
①	CA-82 Board	CPU Board	MVS-8000X
②	CPU-DP Module	CPU -DP Module	On the MIX-53 Board (Slot No. 1) On the MIX-53 Board (Slot No. 2) On the MIX-53 Board (Slot No. 4) On the MIX-53 Board (Slot No. 7) On the MIX-53 Board (Slot No. 8) On the XPT-31 Board (Slot No. 10) On the MY-118 Board (Slot No. 16) On the CA-82 Board (Slot No. 18)
③	MIX-53 Board	Mix/Effect Board	MVS-8000X (Slot No.7, 8) MKS-8210X (Slot No.1, 2, 4)
④	OUT-35 Board	Output Board	MVS-8000X
⑤	OUT-35A Board	Output Board	MKS-8160X
⑥	SG-272A Board	Signal Generator Board	On the CA-82 Board (Slot No. 18)
⑦	SIO-26A Board	Serial Interface Board	On the CA-82 Board (Slot No. 18)
⑧	XPT-31 Board	Cross Point Board	MVS-8000X
⑨	XPT-32 Board	Cross Point Board	MKS-8170X
⑩	XPT-31A Board	Cross Point Board	MKS-8180X
㉛	MY-118 Board	Frame Memory Board	MKS-8440X
㉜	FC-112 Board	Format Converter Board	MKS-8450X (Slot No. 11, 12)

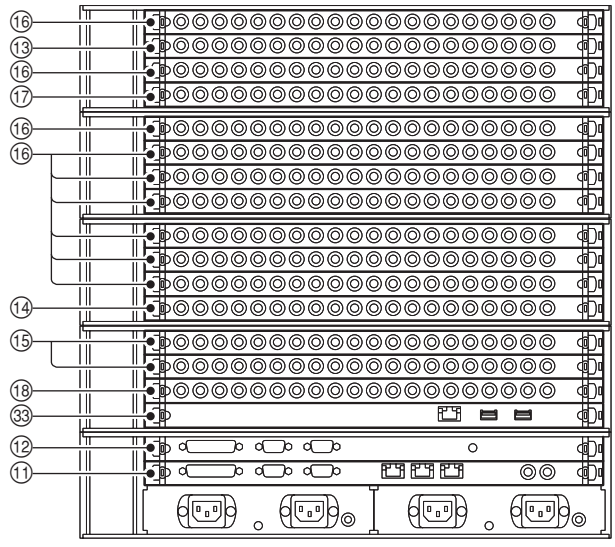

<Rear view>

No.	Name	Function	Remarks
⑪	CN-3233 Board	Control Board	MVS-8000X
⑫	CN-3234 Board	Control Board	MVS-8000X
⑬	CNO-37 Board	Output Board	MKS-8170X
⑭	CNI-37A Board	Input Board	MSV-8000X
⑮	CNO-38 Board	Output Board	MSV-8000X (Slot No. 13) MKS-8160X (Slot No. 14)
⑯	CNI-37 Board	Input Board	MVS-8000X (Slot No. 5) MKS-8110X (Slot No. 6, 7, 8, 9, 10,11) MKS-8170X (Slot No. 1) MKS-8180X (Slot No. 3)
⑰	CNO-38A Board	Input Board	MVS-8000X
⑱	CNO-38B Board	Input Board	MVS-8000X
㉝	CN-3235 Board	Control Board	MKS-8440X

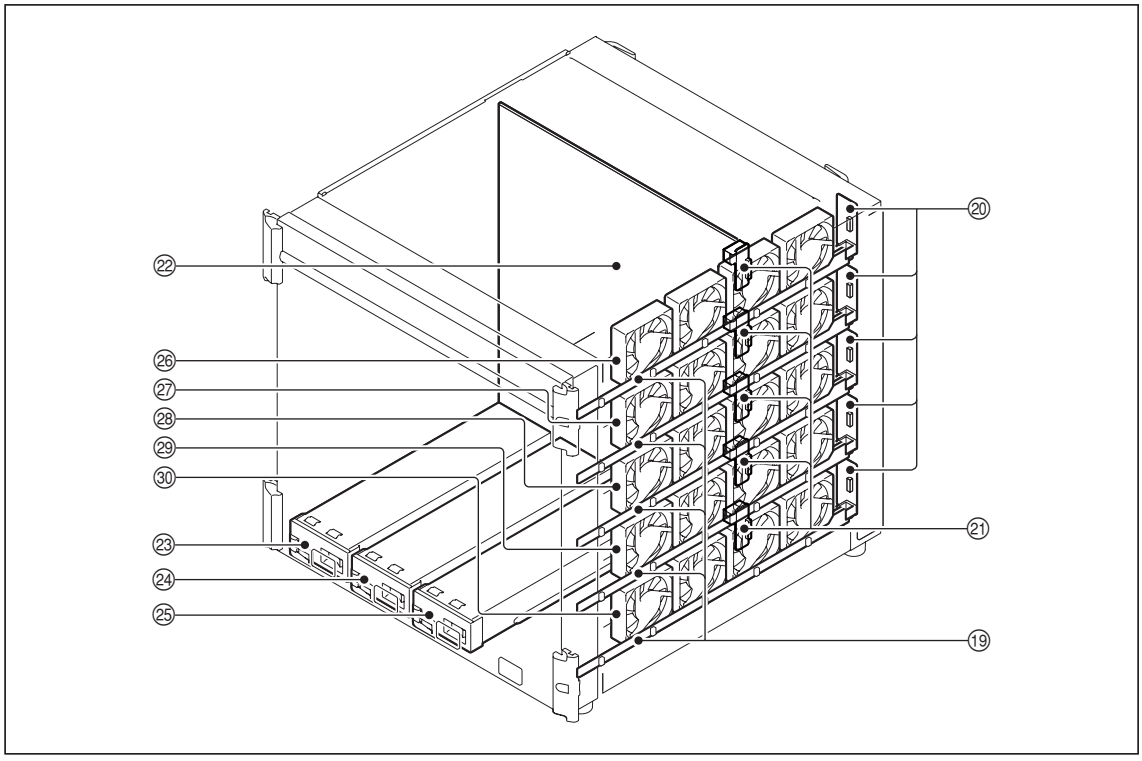

No.	Name	Function	Remarks
⑲	HN-364 Board	Fan Connector Board	MVS-8000X
⑳	HN-365 Board	Fan Connector Board	MVS-8000X
㉑	HN-366 Board	Fan Connector Board	MVS-8000X
㉒	MB-1150 Board	Mother Board	MVS-8000X
㉓	Power Supply Unit A	–	The lower side of MVS-8000X
㉔	Power Supply Unit B	–	The lower side of MVS-8000X
㉕	Power Supply Unit C	–	The lower side of MVS-8000X
㉖	Fan A2 – A5	–	The right side of MVS-8000X
㉗	Fan B2 – B5	–	The right side of MVS-8000X
㉘	Fan C2 – C5	–	The right side of MVS-8000X
㉙	Fan D2 – D5	–	The right side of MVS-8000X
㉚	Fan E2 – E5	–	The right side of MVS-8000X

1-1-2. MVS-7000X

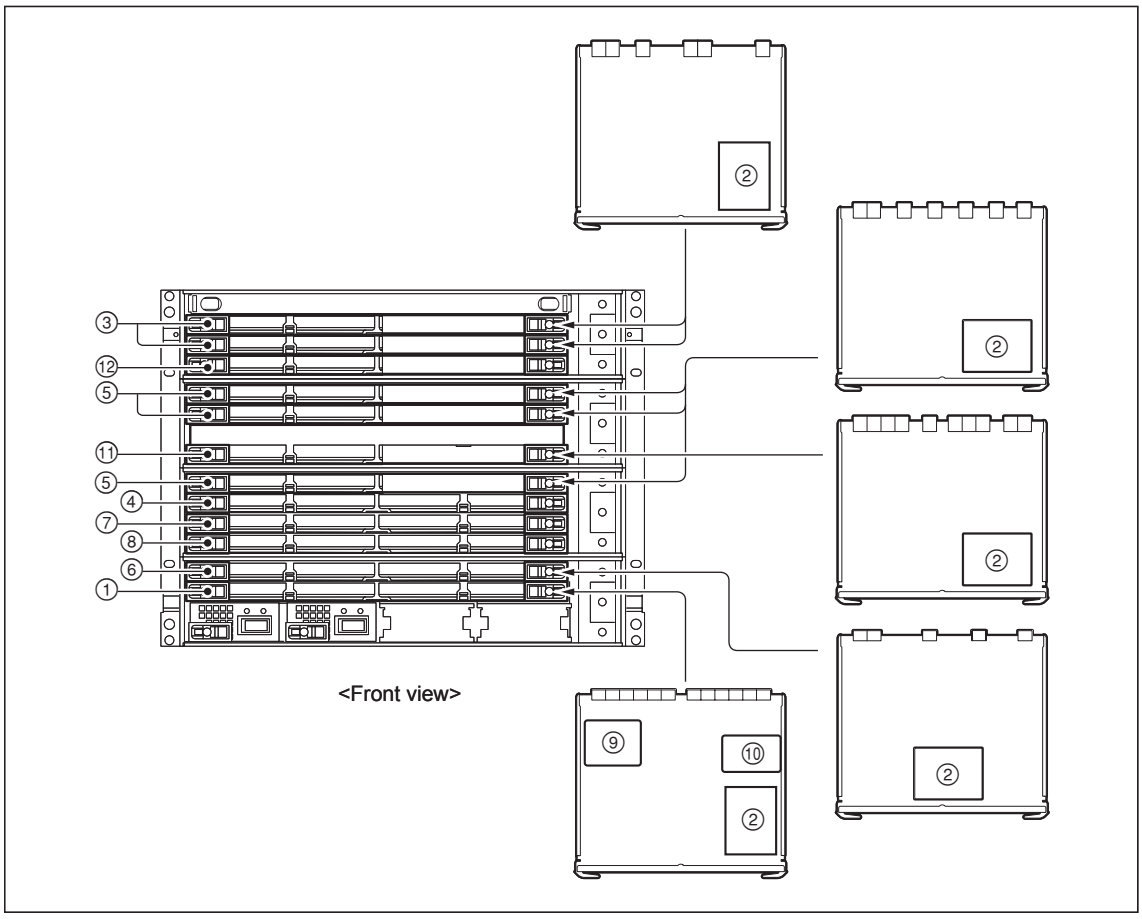

No.	Name	Function	Remarks
①	CA-82A Board	CPU Board	MVS-7000X
②	CPU-DP Module	CPU -DP Module	On the DVP-53 Board (Slot No. 2) On the DVP-53 Board (Slot No. 3) On the MIX-53 Board (Slot No. 5) On the MIX-53 Board (Slot No. 6) On the MIX-53 Board (Slot No. 9) On the XPT-31 Board (Slot No. 8) On the MY-118 Board (Slot No. 13) On the CA-82A Board (Slot No. 14)
③	DVP-53 Board	DME Board	MKS-7471X (Slot No. 2) MKS-7470X (Slot No. 3)
④	FC-112 Board	Format Converter Board	MKS-8450X
⑤	MIX-53 Board	Mix/Effect Board	MVS-7210X (Slot No. 5, 6, 9)
⑥	MY-118 Board	Frame Memory Board	MKS-8440X
⑦	OUT-35 Board	Output Board	MVS-7000X
⑧	OUT-35A Board	Output Board	MKS-8160X
⑨	SG-272A Board	Signal Generator Board	On the CA-82A Board (Slot No. 14)
⑩	SIO-26A Board	Serial Interface Board	On the CA-82A Board (Slot No. 14)
⑪	XPT-31 Board	Cross Point Board	MVS-7000X
⑫	XPT-32 Board	Cross Point Board	MKS-7470X

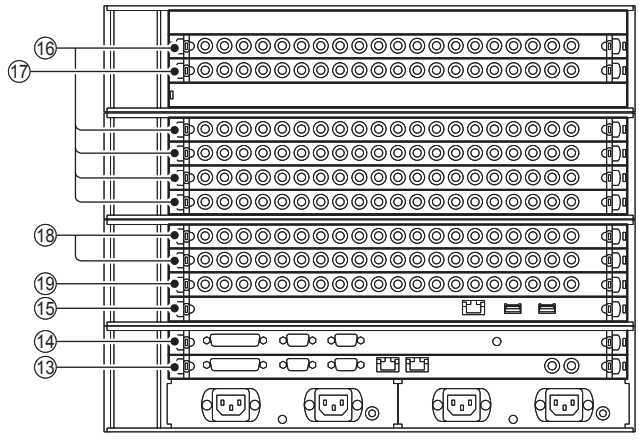

<Rear view>

No.	Name	Function	Remarks
⑬	CN-3233A Board	Control Board	MVS-7000X
⑭	CN-3234 Board	Control Board	MVS-7000X
⑮	CN-3235 Board	Control Board	MKS-8440X
⑯	CNI-37 Board	Input Board	MKS-8110X (Slot No. 2, 6, 7, 8) MVS-7000X (Slot No. 5)
⑰	CNO-37 Board	Output Board	MKS-7171X
⑱	CNO-38 Board	Output Board	MSV-7000X (Slot No. 9) MKS-8160X (Slot No. 10)
⑲	CNO-38B Board	Input Board	MVS-7000X

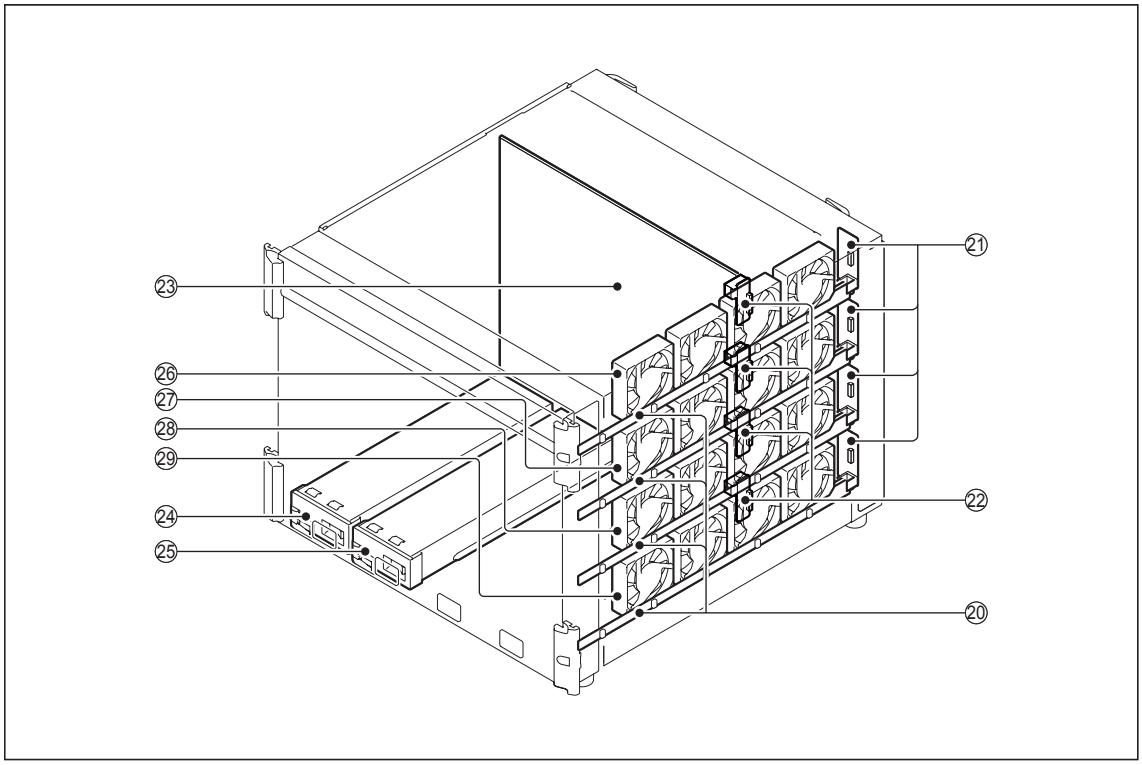

No.	Name	Function	Remarks
⑳	HN-364 Board	Fan Connector Board	MVS-7000X
㉑	HN-365 Board	Fan Connector Board	MVS-7000X
㉒	HN-366 Board	Fan Connector Board	MVS-7000X
㉓	MB-1151 Board	Mother Board	MVS-7000X
㉔	Power Supply Unit A	–	The lower side of MVS-7000X
㉕	Power Supply Unit B	–	The lower side of MVS-7000X
㉖	Fan A2 – A5	–	The right side of MVS-7000X
㉗	Fan B2 – B5	–	The right side of MVS-7000X
㉘	Fan C2 – C5	–	The right side of MVS-7000X
㉙	Fan D2 – D5	–	The right side of MVS-7000X

1-2. Replacement of Main Parts

CAUTION

Before starting replacement work, be sure to turn off all power switches and disconnect all power plugs.

1-2-1. Removing/Installing the Front Panel

Removal

1. Loosen the four screws with stopper to detach the front panel in the arrow direction.

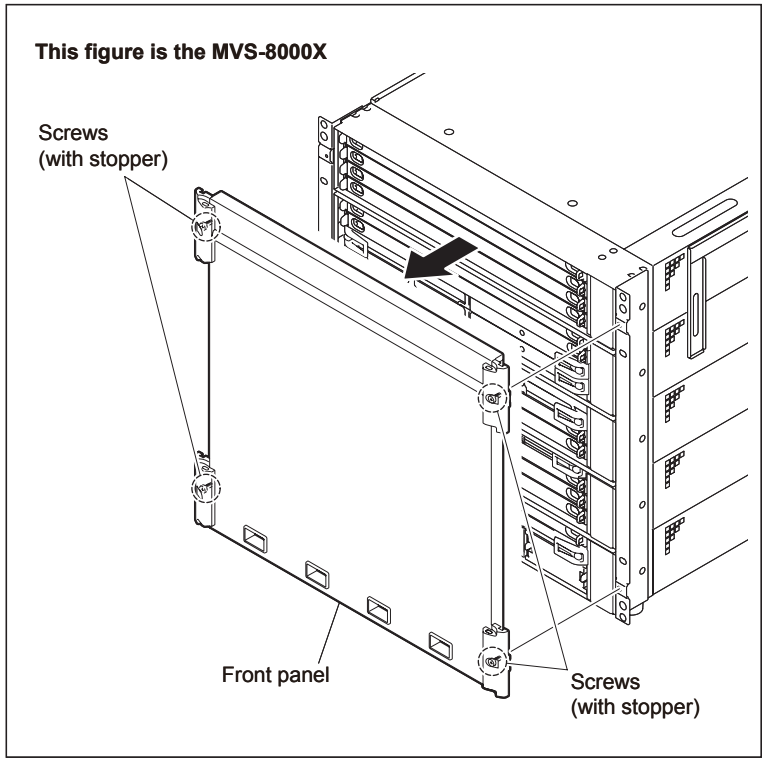

Installation

2. Install the front panel and tighten the four screws with stopper.

1-2-2. Power Supply Unit

Removal

1. Remove the front panel.
   (Refer to Section 1-2-1.)

2. Slide the switch cover in the arrow direction, and unlock the eject lever.
3. Pull the eject lever in the arrow direction after pressing the unlock button.
4. Remove the power supply unit.

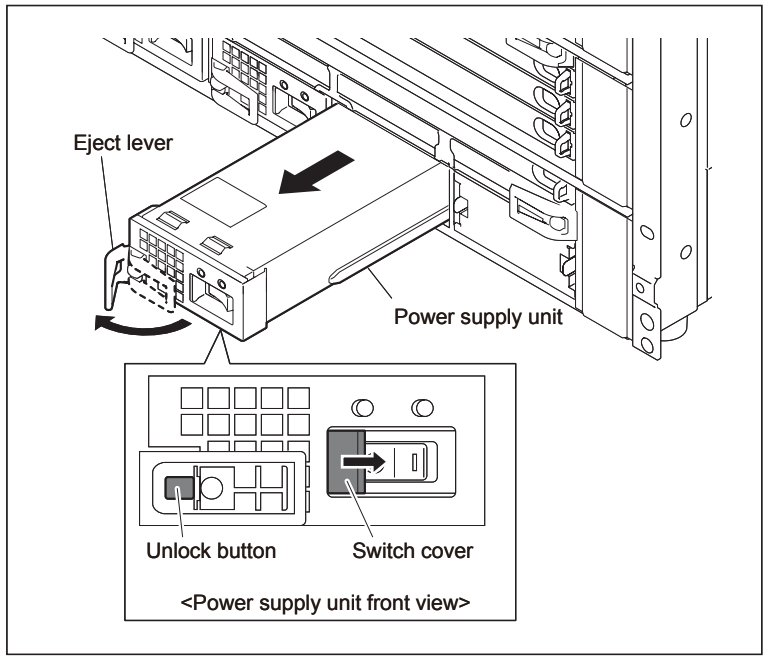

Installation

5. Push the power supply unit into the slot as far as it will go with the eject lever open.
6. Close the eject lever in the arrow direction.
7. Slide the switch cover in the arrow direction and lock the eject lever.

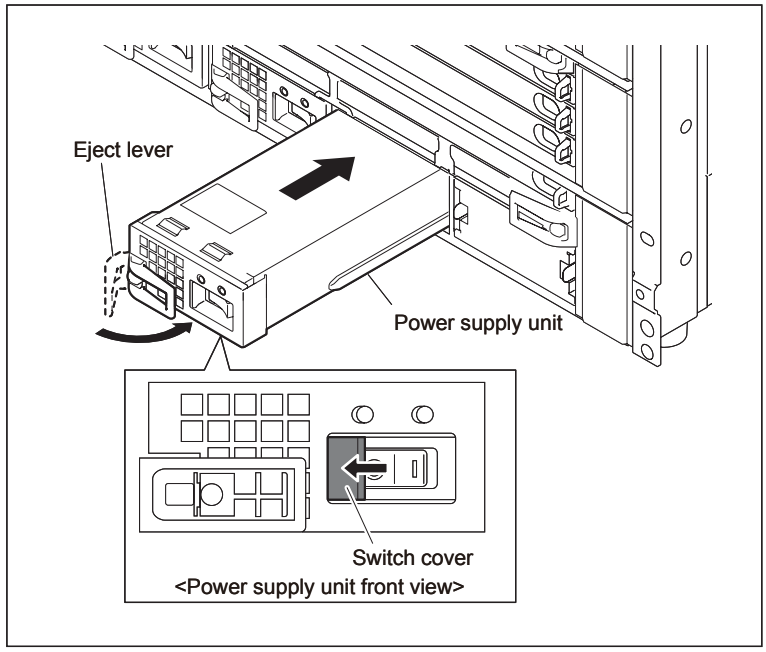

1-2-3. Fan

Removal

1. Remove the front panel.
   (Refer to Section 1-2-1.)

2. Loosen the fan assembly fixing screw by one turn and slide the lock plate in the arrow direction.
3. Pull out the fan assembly.

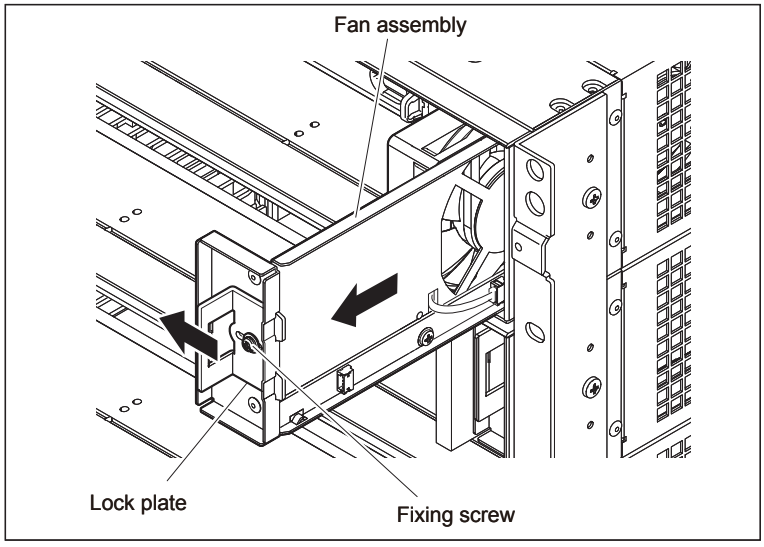

4. Disconnect the fan harness from the connector on the HN-364 board.
5. Remove the two screws to detach the DC fan (80 × 80).

   Note

   Detach the DC fan (80 × 80) from the front side.

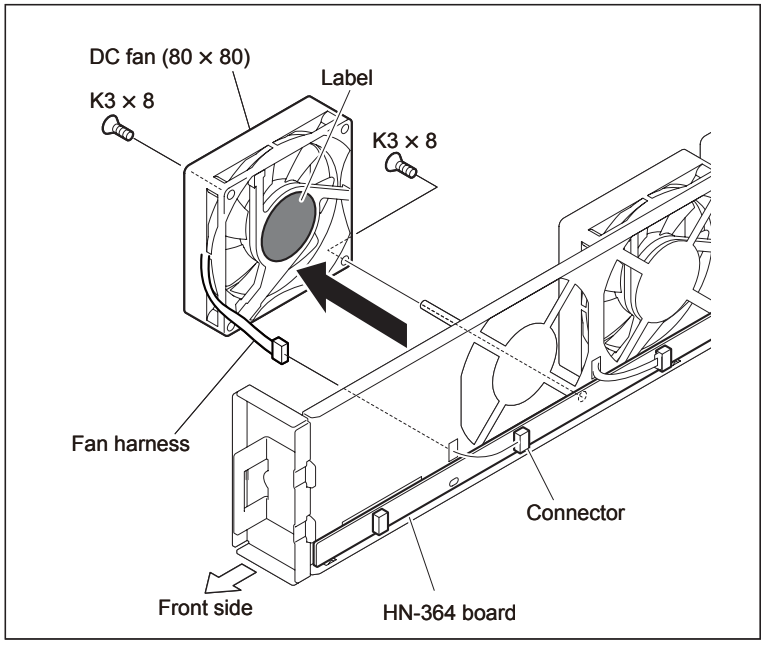

Installation

6. Install the removed parts by reversing the steps of removal.

   Notes

   - Install the rear DC fan (80 × 80) of the unit first paying attention to the orientation of the label side.
   - Apply screw locking compound to the screw and tighten.
   - Be careful so that the fan harness is not caught between the DC fan (80 × 80) and the panel.
   - Be careful so that the height of all harnesses connected to the connectors does not exceed the plate edge width.

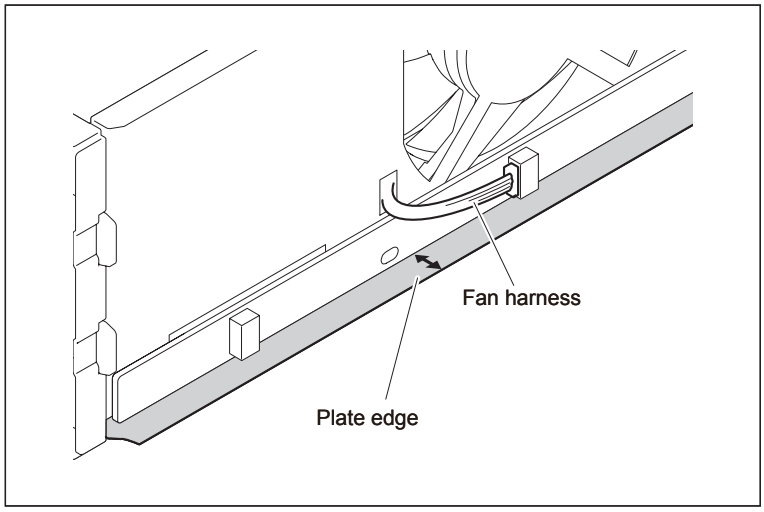

1-3. Periodic Check and Replacement

1-3-1. Periodic Check/Replacement Parts

The following parts require periodic maintenance. Perform maintenance work referring to the replacement cycles shown in the following table.

Notes

- The replacement cycle of each part is not guaranteed. These replacement cycles are available as reference values when making a maintenance plan.
- These replacement cycles depend on operating environment and conditions of the unit.

Part name	Location	Replacement part	Maintenance cycle (reference)	Remarks
Filter	Front panel of MVS-8000X	4-184-219-01	Cleaning: Once every 2 months	Refer to the Installation Manual.
	Front panel of MVS-7000X	4-261-862-01		
Fan	Right side of MVS-8000X/7000X	⚠1-787-908-11	Cleaning: Once a month Replacement: Once every 4 years	After replacement, reset the total operating hours. (Refer to Section 1-9-6.)
Power supply unit	MVS-8000X/7000X	HK-PSU05 (Power supply unit)	Replacement: Once every 4 years and 6 months	After replacement, reset the total operating hours. (Refer to Section 1-9-5.)

1-3-2. Cleaning the Fans

CAUTION

Before cleaning the fans, be sure to turn off the power switch and disconnect the power cable.
Cleaning the fans with power turned on may result in electric shock or damage to boards.

Note

The MVS-8000X/7000X is cooled with the fans on the right side.
If dust accumulates on the air vents of the fans and air flow is blocked, internal temperature of the unit increases, which may affect the performance and life of the unit.
It is recommended that the fans be cleaned monthly.

This figure is the MVS-8000X

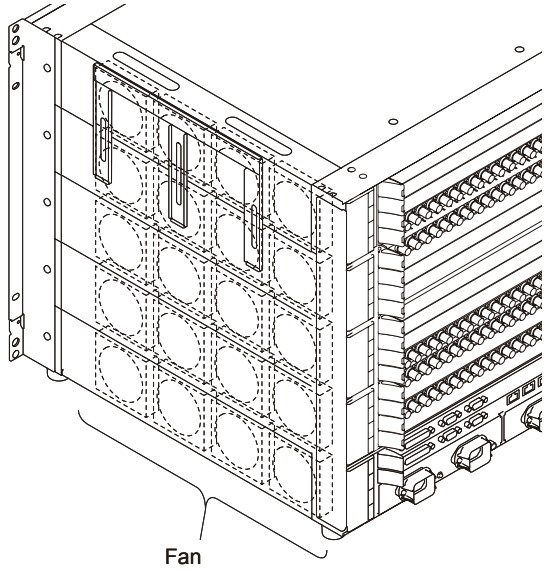

1. Normal state

Remove dust on the fans and surronding parts with a vacuum cleaner or the like.

2. When heavy dust cannot be removed

1. Remove the relevant fan following the fan replacement method (Refer to Section 1-2-3.)
2. Clean the frame and blades of the fan with a cleaning cloth moistened with cleaning fluid.
   - Cleaning cloth
     (Sony part No.: 3-184-527-01)
   - Cleaning fluid
     (Sony part No.: 9-919-573-01)

1-4. Tools

The following tools are prepared for the MVS-8000X/7000X.

Tool name	Part number	Use
Extension board EX-1132	A-1733-253-A	Used to extend the following plug-in boards. CA-82/82A, OUT-35/35A, MIX-53, XPT-32, MY-118, FC-112, and DVP-53 (Refer to Section 1-7 for using this extension board.)
Extension board EX-1132A	A-1733-254-A	Used to extend the following plug-in boards. XPT-31/31A (Refer to Section 1-7 for using this extension board.)
Lever unlock tool	4-193-124-01	Used to remove the connector boards and the blank panel of rear panel. (Refer to the Installation Manual for using this tool.)

1-5. Fuse/IC Link

WARNING

Fuses and IC links are critical devices to maintain safety of the unit.
Always use parts specified in the manual for replacement. Use of unspecified parts may cause fire or electric shock.

This unit is provided with fuses and IC links for circuit protection.
These devices are fused when overcurrent flows due to abnormal operation in the unit.
When any of fuses and IC links is fused, turn off the power of the unit and inspect inside of the unit. After the cause of the overcurrent has been removed, replace the part.

Board	Ref. No.	Address	Part No.	Description
CA-82/82A	F201	B-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F202	A-3	⚠ 1-533-627-21	Fuse 5 A/125 V
	F203	A-4		
	F204	A-2		
	F205	A-6		
	F206	A-5		
	PS301	B-7	⚠ 1-576-677-21	IC link 4 A/72 V
	PS3901	B-12	⚠ 1-576-124-21	IC link 1 A/72 V
CN-3233/3233A	PS101	A-1	⚠ 1-576-677-21	IC link 4 A/72 V
	PS111	B-4		
	PS131	B-3		
	PS141	B-3		
	PS151	J-4		
CN-3235	F201	A-1	⚠ 1-533-999-21	Fuse 2 A/125 V
CN-3234	PS101	A-1	⚠ 1-576-677-21	IC link 4 A/72 V
	PS131	P-3		
CNI-37/37A	F1	A-1	⚠ 1-576-329-21	Fuse 10 A/125 V
CNO-37	F1	B-1	⚠ 1-576-329-21	Fuse 10 A/125 V
CNO-38/38A/38B	F1	A-1	⚠ 1-576-329-21	Fuse 10 A/125 V
	PS1	A-3	⚠ 1-576-677-21	IC link 4 A/72 V

Board	Ref. No.	Address	Part No.	Description
DVP-53	F201	B-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F202	A-11	⚠ 1-533-627-21	Fuse 5 A/125 V
	F203	A-10		
	F204	A-6		
	F205	A-9		
	F206	A-5		
	F207	A-8		
	F208	A-3		
	F209	A-4		
	F210	A-7		
FC-112	F201	A-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F202	L-2	⚠ 1-533-627-21	Fuse 5 A/125 V
	F203	E-2		
	F204	H-12		
	F205	A-2		
	F206	N-2		
	F207	G-2		
	F208	A-4		
HN-364	F1	L-1	⚠ 1-576-329-21	Fuse 10 A/125 V
HN-366	F1	–	⚠ 1-576-329-21	Fuse 10 A/125 V
MIX-53	F201	B-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F202	A-10	⚠ 1-533-627-21	Fuse 5 A/125 V
	F203	A-9		
	F204	A-3		
	F205	A-8		
	F206	A-5		
	F207	A-4		
	F208	A-1		
	F209	A-6		
	F210	A-3		
	F211	A-11		
	F212	A-7		
MY-118	F1	B-13	⚠ 1-576-566-21	Fuse 15 A/65 V
	F200	P-2	⚠ 1-533-627-21	Fuse 5 A/125 V
	F201	N-2		
	F202	R-4		
	F203	A-2		
	F204	M-2		
OUT-35/35A	F201	A-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F202	A-3	⚠ 1-533-627-21	Fuse 5 A/125 V
	F203	K-2		
	F204	P-2		
	F205	L-2		
	F206	J-2		
	F207	K-2		
	F208	A-2		
SG-272A	F300	A-1	⚠ 1-533-998-21	Fuse 1 A/125 V

Board	Ref. No.	Address	Part No.	Description
XPT-31/31A	F1	A-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F201	A-8	⚠ 1-533-627-21	Fuse 5 A/125 V
	F301	C-4	⚠ 1-576-329-21	Fuse 10 A/125 V
	F302	C-5		
	F303	C-6		
XPT-32	F1	A-12	⚠ 1-576-566-21	Fuse 15 A/65 V
	F201	H-3	⚠ 1-533-627-21	Fuse 5 A/125 V
	F202	M-3		
	F203	K-3		
	F204	F-3		

1-6. Lead-free Solder

Boards requiring use of lead-free solder are printed with a lead free mark (LF) indicating the solder contains no lead.
(Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size.)

: LEAD FREE MARK

Notes

- Be sure to use the lead-free solder for the printed circuit board printed with the lead free mark.
- The lead-free solder melts at a temperature about 40 °C higher than the ordinary solder, therefore, it is recommended to use the soldering iron having a temperature regulator.
- The ordinary soldering iron can be used but the iron tip has to be applied to the solder joint for a slightly longer time. The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful.

1-7. Using Extension Boards

Two types of extension boards are prepared for the MVS-8000X/7000X to extend plug-in boards.

Name: Extension board EX-1132
Part number: A-1733-253-A
Use: Inspection/adjustment of CA-82/82A, OUT-35/35A, MIX-53, XPT-32, MY-118, FC-112, and DVP-53 boards

Name: Extension board EX-1132A
Part number: A-1733-254-A
Use: Inspection/adjustment of XPT-31/31A boards

Note

Before installing and removing an extension board, be sure to turn off the power switch and disconnect the power cable.
Installing or removing an extension board with power turned on may cause electric shock or damage to boards.

Procedure

1. Turn off the power and disconnect the power cable from the power outlet.
2. Remove the front panel. (Refer to Section 1-2-1.)
3. Remove the board to be inspected or adjusted.
   Note
   When a blank panel is attached to the slot of the board to be inspected or adjusted, detach the blank panel.
4. Insert extension board EX-1132 or 1132A into the slot from which the board was removed as far as it will go referring to the right figure.
5. Close the right and left EX levers in the arrow directions to securely lock the extension board.

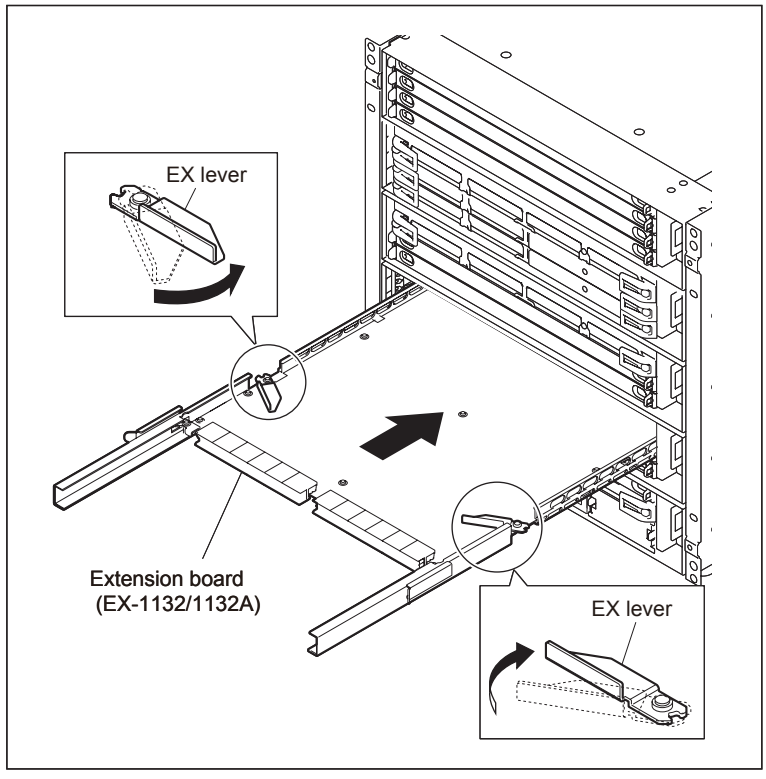

6. Insert the board removed in step 3 into the rail of the extension board, and securely connect the connectors of both boards.

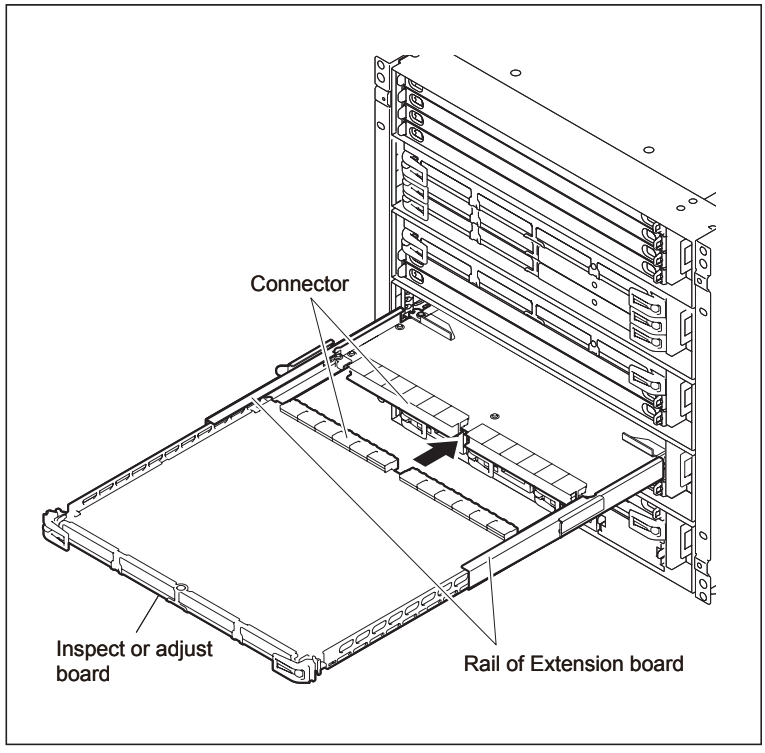

Note

When removing the inspected or adjusted board, open the right and left levers in the arrow directions.

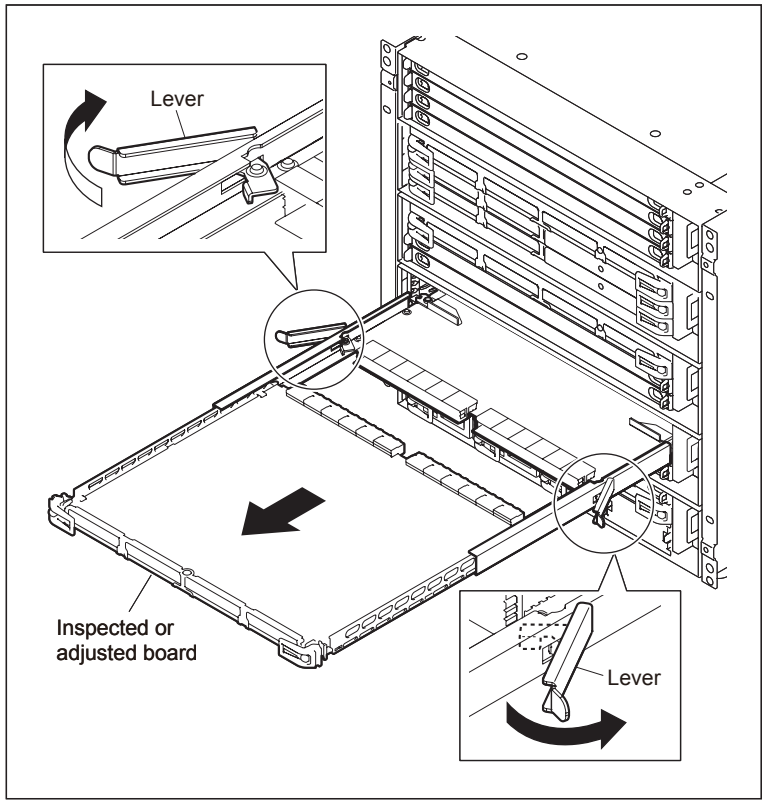

1-8. Circuit Description

This section provides summary of circuits in each block of the MVS-8000X/7000X and the option board.

1. Cross point block
2. M/E block
3. Output processor/color corrector block
4. MVE interface block
5. CPU and SG block
6. Frame memory block
7. Format converter block
8. DME block

1. Cross Point Block

(1) XPT-31 board (MVS-8000X/7000X)

This XPT-31 board configures a 160 × 160 serial matrix.
Input signals IN1 to IN70 and the internal reentry signal are input to this XPT-31 board, and are then sent to the M/E block and the output processor block through the matrix.
The cross point block is controlled by the CPU module board on the XPT-31 board.

(2) XPT-31A board (MKS-8180X)

The XPT-31A board configures a 160 × 160 serial matrix.
Input signals IN71 to IN140 are input to this XPT-31A board, and are then sent to the M/E block and the output processor block through the matrix.
The cross point block is controlled by the CPU module board on the XPT-31 board.

(3) CNI-37 board (MVS-8000X/7000X, MKS-8180X)

The CNI-37 board is a 20-channel input connector board on the rear panel of the unit.
The CNI-37 board corrects the characteristics of 20-channel input signals by the cable equalizer circuit and the reclocker circuit, and outputs the corrected signals through the motherboard to the XPT-31 or XPT-31A board.

2. M/E Block

The 24-channel signals from the cross point block are input to the M/E block of the MVS-8000X, and 11-channel (10-channel for M/E2 and M/E3) signals are returned to the cross point block as output.
The 32-channel signals from the cross point block are input to the M/E block of the MVS-7000X, and 18-channel (16-channel for M/E2) signals are returned to the cross point block as output.
The M/E block sends/receives dedicated signals to be input from and output to the MVE to/from the DME interface block.
Consistent M/E processing is performed on the MIX-53 board of the MVS-8000X/7000X.

MIX-53 board (MVS-8000X/7000X, MKS-8210X, MKS-7210X)

The MIX-53 board consists of the following blocks.
- SDI input cross point block
- SDI input/output block
- Key process block

- Wipe/color background signal generator block
- Mixer block
- Resizer block

The MIX-53 board is controlled by the local CPU module (CPU-DP) on the board.

[SDI input cross point block]: IC1901 to IC1904
This block selects the key signal sent from the cross point block (XPT board) and sends the selected key signal to the SDI input block (IC2, IC3).

[SDI input/output block]: IC2 to IC6
This block converts the serial SDI signal sent from the cross point block (XPT board) or the SDI input cross point block to parallel signal, and sends the parallel signal to the key process block and the mixer block.
This block eliminates phase differences of input signals and performs video processing (including video level adjustment for each input).
Furthermore, this block converts the signal sent from the mixer block to SDI signal, and sends the SDI signal to the cross point block (XPT board) and the rear board (CNO board).

[Key process block]: IC7, IC8
This block performs key processing for the Luminance key, Linear key, Chroma key, etc. and mask processing based on the signal from the SDI input block and the wipe signal generated by the color background signal generator through the mixer block, and then sends the processed signals to the mixer block.

[Wipe/color background signal generator block]: IC10
This block generates the wipe signal and the color background signal, and sends them to the mixer block.

[Mixer block]: IC9
The mixer block compounds the signal sent directly from the SDI input/output block, the KEY signal sent from the key process block, and the wipe signal sent from the wipe/color background signal generator block to generate the M/E.P/P output signal.
This block sends the color background signal to the SDI input/output block without processing it.
When applying the DME effect, the target signal is output from the mixer block and is sent to the MVE interface block. The signal to which effect was applied through the DME is returned again to the mixer block and is compounded with other signals.
This block also sends video/key signals to the resizer circuit (simple DME function) and receives return video/key signals from the resizer circuit.

[Resizer block]: IC11, IC12
This block applies resizer effects to the signal sent from the mixer block, and sends the signal to which resizer effects were applied to the mixer block.

Main effects are shown below.

(1) Enlargement, reduction, shift, aspect
(2) Crop, border
(3) Mosaic, edge enhance, defocus
(4) Mask, drop shadow, wide key boarder (One of these is selected.)

3. Output Processor/Color Corrector Block

OUT-35 board (MVS-8000X/7000X)/OUT-35A board (MKS-8160X)
The OUT-35 and OUT-35A boards are output processing boards that have out process, format conversion, multisource display, and CCR (Color Corrector) functions.
Each of these boards consists of the following blocks.

- SDI input/output block
- Format converter block)
- Multisource display block (Support in the future)
- CCR (Color Corrector) processing block

The OUT-35 and OUT-35A boards are controlled by the CPU module on the XPT-31 board.

[SDI input/output block]: IC1 to IC7
The SDI input/output block selects the SDI signals that are input from the XPT board in the cross point block, performs out processes such as video process, blanking, safe title, superimposition, and output phase adjustment, and then sends processed signals to the XPT board in the cross point block or the rear CNO-38 board.
This block also sends video processed signals to the format converter block and the multisource display block.

[Format converter block]: IC8, IC12 to IC17
The format converter block converts the video format of the 2-channel signals received from IC1, and sends the signals to the rear CNO-38 board.

[Multisource display block]: IC9, IC18, IC19
The multisource display block selects signals for screens from the 24-channel signals received from IC1 to IC6, and converts the selected signals to multisource display output signals, and then sends them to the rear CNO-38 board through IC5.

[CCR processing block]: IC10, IC20 to IC25
The CCR processing block performs CCR processing such as primary, secondary, and spot processing, and sends the processed signals to the XPT board in the cross point block through IC7.
This block is not mounted on the OUT-35A board.

4. MVE Interface Block

The MVE interface block is an option (MKS-8170X) of the MVS-8000X and an option (MKS-7171X) of the MVS-7000X.
MKS-8170X consists of an XPT-32 board, a CNI-37 board, and a CNO-37 board.
MKS-7171X consists of a CNO-37 board.

(1) XPT-32 board (MKS-8170X)

The XPT-32 board configures a 80 × 80 serial matrix.
The DME1 V/K and DME2 V/K signals sent from each MIX-53 board are assigned to DME OUT signals by the serial matrix and are output.
The DME IN signals are assigned to each MIX-53 board as EFF IN1 V/K and EFF IN2 V/K signals and are output. The DME IN signals are also assigned to the DME Monitor signal and are output to the XPT-31 board.

The DME Utility 1 and DME Utility 2 signals sent from the XPT-31 or XPT-31A board are processed by the FPGA, and are then sent to the serial matrix.
The MVE interface block is controlled by the CPU module board on the XPT-31 board.

(2) CNI-37 board (MKS-8170X)

The CNI-37 board is a 20-channel input connector board on the rear panel of the unit.
The CNI-37 board corrects the characteristics of 20-channel input signals by the cable equalizer circuit and the reclocker circuit, and outputs the corrected signals through the motherboard to the XPT-32 board.

(3) CNO-37 board (MKS-8170X, MKS-7171X)

The CNO-37 board is a 20-channel output connector board on the rear panel of the unit.
This board outputs the 20-channel signals that are input from the XPT-32 board through the motherboard by the reclocker circuit and the cable driver circuit as DME OUT signals.

5. CPU and SG Block

The CPU and SG block consists of a CA-82/82A board.

The CA-82/82A board has the following functions.

- Overall unit control
- Generation of clock in synchronization of the reference clock and timing signal and their supply to each board
- Communication with Control LAN and Data LAN
- RS-422 communication
- GPI input/output control
- Interface with compact flash

The main CPU (CPU-DP module) on the CA-82/82A board controls entire unit.
The main CPU is connected to the local CPUs in the cross point block, M/E block, frame memory block, and DME block through the Gigabit Ethernet HUB on the CA-82/82A board to achieve overall control.
The main CPU indirectly controls the output processor block and the format converter block through the cross point block.
The child SG-272 board on the CA-82/82A board generates the reference clock and the timing signal.
The dedicated ASIC (IC3, IC4) and the FPGA (IC2) are used for data communication with Network A (Control LAN) and Network B (Data LAN) of the CA-82 board, and these devices are controlled by the main CPU.
The Ethernet Controller of the main CPU performs transmission and reception of Network A (Control LAN) and Network B (Data LAN) of the CA-82A board.
The child SIO-26 board on the CA-82/82A board controls RS-422 communication.
The main CPU also controls GPI input and output through IC5. IC5 controls acquisition of information such as PSU_STATUS, FAN_STATUS, and BD_STATUS, and also conrtrols peripheral functions such as FAN_CTRL.
The CA-82/82A board has a circuit for interface with the compact flash card socket and the main CPU.

6. Frame Memory Block

The frame memory block consisting of the MY-118 board and the CN-3235 board has 2-channel input and 16-channel output.

MY-118 board and CN-3235 board (MKS-8440X)

The MY-118 board has a function to store 2-channel signals in the SDRAM memory as still-image data and output stored still-image data in 16 channels (8 channels in the 3G format).
The MY-118 board converts the 2-channel SDI signals sent from the XPT-31 or XPT-31A board to parallel signals, eliminate signal phase differences, performs video processing (including video level adjustment for each input), and then stores the video data in the memory.
Output image data from the memory is converted again to SDI signals and are then sent to the XPT-31 board.
The MY-118 board also has a function to bypass input signals to output without processing them to check images to be stored.
This board is provided with a network interface for image transfer with devices connected to a LAN through the FM DATA LAN and a USB2 interface to read image data from and write image data to the external hard disk only for the frame memory.
The rear CN-3235 board contains an FM DATA LAN connector and a USB2 connector.
A single local CPU module (CPU-DP) on the MY-118 board controls the frame memory block.

7. Format Converter Block

The input format converter block consists of an input connector board and an FC-112 board.
The output format converter block consists of an OUT-35/35A board and an output connector board.

FC-112 board (MKS-8450X)

The FC-112 board performs the following processing.

- Generates a clock signal and a timing signal in synchronization with the reference signal, which are used in the FC-112 board.
- Up to two FC-112 boards can be mounted in the MVS-8000X. Each board is capable of format conversion for eight channels (HD formatting).
  (Format conversion for four channels in the case of 3G formatting)
- Up to one FC-112 board can be mounted in the MVS-7000X. This board is capable of format conversion for eight channels (HD formatting).
  (Format conversion for four channels in the case of 3G formatting)
- The local CPU on the XPT-31 board controls the FC-112 board.

The 8-channel or 16-channel SDI signals sent from the input connector board are converted to parallel signals using the clock and timing signals generated by the FC-112 board.
The parallel signals are transferred through the interface block to the format converter block where format conversion is performed. The converted signals are transferred again through the interface block and converted to serial signals. The converted serial signals are sent to the XPT-31 board.

8. DME Block

The DME section is an option (MKS-7470X/MKS-7471X) of the MVS-7000X.

DVP-53 Board (MKS-7470X, MKS-7471X)
The DVP-53 board consists of the following blocks.
- SDI input/output block
- PVMIX block (Pre Video Modify & MIX)
- FINTPU block (Filter & Interpolator)
- AINTPL block (Address Generator & Interpolator)
- VMIX block

The DVP-53 board is controlled by the local CPU module (CPU-DP) on this board.

[SDI input/output block]: IC5, IC6
This block converts the SDI signal sent from the cross point block (XPT-32 board) to parallel signal, and then sends the parallel signal to the PVMIX block.
This block eliminates phase differences in input signals and performs video processing (including video level adjustment for each input).
Furthermore, this block converts the signal sent from the VMIX block to SDI signal, and sends the SDI signal to the cross point block (XPT-32 board).

[PVMIX block]: IC11
This block sends the video/key signals received from the SDI input/output block to the FINTPU block and sends the return video/key signals processed in the FINTPU block and the AINTPL block to the PVMIX block.

The PVMIX block has the following main functions.
- Border/Crop/Beveled Edge
- Video Modify (including Posterization, Solarization, and Mosaic)
- Input Freeze
- Mask key generation
- Recursive

[FINTPU block]: IC7, IC8
This block first performs horizontal Defocus/Blur and Filtering processing (Antialias Filter) according to the reduction rate. Then this block sorts data (Scan Conversion) using the DDR2 SDRAM and then performs vertical Defocus/Blur and Antialias Filter processing. The video/key signals are sent to the AINTPL block and are written to the DDR2 SDRAM for interpolation.
After that, this block receives the address generated in the AINTPL block. Data is read from the DDR2 SDRAM according to this address and horizontal interpolation processing is performed. Output data is sent to the AINTPU block.

The FINTPU block has the following main functions.
- Antialias Filter (in horizontal and vertical directions)
- Scan Conversion
- Defocus/Blur
- EffectG2 Mask or Mask
- Interpolation

[AINTPL block]: IC9, IC10
The Field/Frame Conversion processing is applied to the video/key signals received from the FINTPU block using the DDR2 SDRAM, and the converted signals are written to the DDR2 SDRAM for interpolation.
Furthermore, an address for 3D Linear Transform is generated in this block, data is read from the DDR2 SDRAM according to this address, and horizontal interpolation processing is performed. Then the interpolated video/key signals of the FINTPU block are received for vertical interpolation. The video/key signals are then sent to the PVMIX block where Lighting synthesis is applied to the video/key signals by the Light key generated in the AINTPL block.

The AINTPL block has the following main functions.
- 3D Linear Transform
- Non-linear
- Interpolation
- Lighting
- Field/Frame Conversion

[VMIX block]: IC12
This block sends video/key signals received from the PVMIX block to the SDI input/output block.

The VMIX block has the following main functions.
- Recursive
- Combine
- Graphic

1-9. Maintenance Menu

The MVS-8000X executes the self-diagnosis in the following cases.
- When the unit is turned on
- When the unit is reset from the control panel (CCP-8000/9000/6224/6324) of the connected system
- When the reset switch S402 or CA reset switch S401 on the CA-82/82A board is pressed

The self-diagnosis is also performed during operation on a periodic basis.
You can check the self-diagnosis result with the maintenance menu.
The following describes the structure and contents of the maintenance menu.

Menu Items (Menu Number)

Maintenance Menu
- Maintenance Main (9991) ..... Displays the latest measurement data.
- Maintenance Latest Error (9991.1)..... Displays recent errors.
- Maintenance Circuit Board (9991.2)..... Displays the front board operating status and temperature sensor measurement result
- Maintenance PSU (9991.3)..... Displays and resets the total operating hours of power supply units
- Maintenance Fan (9991.4)..... Displays the rotational speed and total operating hours of fans

1-9-1. Calling the Maintenance Menu

Use the control panel (CCP-8000/9000/6224/6324) of the system connected to the unit for maintenance menu operations.

1. Press a top menu selection button at the upper left of the menu display.
   The top menu window appears.
2. Enter a menu number with the numeric keypad.

Menu Item	Menu Number
Maintenance Main	9991
Maintenance Latest Error	9991.1
Maintenance Circuit Board	9991.2
Maintenance PSU	9991.3
Maintenance Fan	9991.4

3. Press the Enter button.
4. Repeat steps 2 and 3 twice.
   The selected menu item is displayed.

   Note

   A menu number must be entered three times in total.

1-9-2. Maintenance Main Menu

This menu displays the latest measurement data obtained during the self-diagnosis.

Status area

Normal operation

Category/Sub Category		Status	Comment
Circuit Board	Function	OK	
	Temperature	OK	Slot 8 MIX-53 (50)
PSU	Function	OK	
	Operation Hours	OK	PowerA (10000h)
Fan	Fan Speed (Min)	OK	FAN-A2 (3120)
	Fan Speed (Max)	OK	
	Operation Hours	OK	FAN-B1 (10000h)

When an error is detected

Category/Sub Category		Status	Comment
Circuit Board	Function	Error	Slot 10 XPT-31
	Temperature	Error	Slot 8 MIX-53 (80)
PSU	Function	Error	PowerA
	Operation Hours	Error	PowerA (30132h)
Fan	Fan Speed (Min)	Error	FAN-A2 (1000)
	Fan Speed (Max)	Error	FAN-B3 (4500)
	Operation Hours	Error	FAN-C (30132h)

Function button area

Sub Category	Description	Status	Comment
Function	Front board operating status (CPU error)	OK	Not displayed
		Error	The slot number and board name of the faulty board are displayed.
Temperature	Internal temperature anomaly	OK, Error	The slot number, board name, and temperature (°C) of the highest-temperature board are displayed.
PSU Function	Power supply unit operating status	OK	Not displayed
		Error	The power supply unit with abnormal AC, DC, or fan is displayed.
PSU Operation Hours	Total operating hours of the power supply unit	OK, Error	The power supply unit name with maximum operating hours and the total operating hours are displayed.
Fan Speed (Min)	Minimum fan speed	OK, Error	The lowest (or zero) speed fan and the fan speed (rpm) are displayed.
Fan Speed (Max)	Maximum fan speed	OK, Error	The fan whose speed is the highest (over the specified limit) and the fan speed (rpm) are displayed.
Fan Operation Hours	Total operating hours of the fan	OK, Error	The fan with the maximum operating hours and the total operating hours are displayed.

Notes

- When no problem occurred during the self-diagnosis, “OK” is indicated in the Status column. If any problem was detected, “Error” is indicated.
- In the Comment column, fan names are written as FAN-A2, FAN-B2, . . . and power supply unit names are written as PowerA, PowerB, . . . to identify each fan. For the installation location of these parts, refer to Section 1-1 “Location of Main Parts.”
- Only one name is displayed in the Comment column even if there are two or more applicable names.

Buttons

Circuit Board button: This switches the menu to the Maintenance Circuit Board menu.
PSU button: This switches the menu to the Maintenance PSU menu.
Fan button: This switches the menu to the Maintenance Fan menu.
SWR1 button: This displays the Maintenance Main menu of Switcher 1.
SWR2 button: This displays the Maintenance Main menu of Switcher 2.
PNL button: This displays the Maintenance Main menu of PNL.
DME1 button: This displays the Maintenance Main menu of DME1.
DME2 button: This displays the Maintenance Main menu of DME2.
Latest Err button: This switches the menu to the Maintenance Latest Error menu.
Board Config button: Non-correspondence

1-9-3. Maintenance Latest Error Menu

This menu displays the error location and time of recent errors using the self-diagnosis result.

Status area

Category/Sub Category		Latest Error	
Circuit Board	Function		
	Temperature	Slot 8 MIX-53	Dec. 15. 2009 10:00:00
PSU	PSU Function		
	PSU Operation Hours	PowerA	Jan. 15. 2010 12:00:00
Fan	Fan Speed (Min)	FAN-A2	Nov. 10. 2009 17:30:00
	Fan Speed (Max)		
	Operation Hours	FAN-B2	Jan. 15. 2010 12:00:00

Function button area

Sub Category	Description	Error Location
Function	Front board (CPU) error	The slot number of the board and board name are displayed.
Temperature	Internal temperature error	The slot number of the board and board name are displayed.
PSU Function	Power supply unit error	The power supply unit name is displayed.
PSU Operation Hours	Guaranteed operating hours of PSU exceeded	The power supply unit name is displayed.
Fan Speed (Min)	Minimum fan speed error	The fan name is displayed.
Fan Speed (Max)	Maximum fan speed error	The fan name is displayed.
Fan Operation Hours	Guaranteed operating hours of fan exceeded	The fan name is displayed.

Note

In the Latest Error column, individual fan names are written as FAN-A2, FAN-B2, and fan unit names are written as FAN-A, FAN-B . . . and power supply unit names are written as PowerA, PowerB, . . . to identify each fan. For the installation location of these parts, refer to Section 1-1 “Location of Main Parts.”

Buttons

Circuit Board button: This switches the menu to the Maintenance Circuit Board menu.
PSU button: This switches the menu to the Maintenance PSU menu.
Fan button: This switches the menu to the Maintenance Fan menu.
SWR1 button: This displays the Maintenance Main menu of Switcher 1.
SWR2 button: This displays the Maintenance Main menu of Switcher 2.
PNL button: This displays the Maintenance Main menu of PNL.
DME1 button: This displays the Maintenance Main menu of DME1.
DME2 button: This displays the Maintenance Main menu of DME2.
Maintenance Main button: This switches the menu to the Maintenance Main menu.

1-9-4. Maintenance Circuit Board Menu

This menu displays the front board operating status and the measurement result of the onboard temperature sensor.
This menu also displays errors that require board replacement.

Note

When one control board is monitoring the operation of other controlled boards simultaneously, and if the control board malfunctions, the controlled boards can no longer be monitored. For this reason, the controlled boards are also regarded as faulty and an error is displayed.
Combinations of control boards and controlled boards are as follows:

	Control Board	Board Controlled
MVS-8000X	Slot 10 (XPT-31)	Slot 3 (XPT-32), Slot 6 (XPT-31A), Slot 13 (OUT-35), Slot 4 (OUT-35A), Slot 11 (FC-112), Slot 12 (FC-112)
MVS-7000X	Slot 8 (XPT-31)	Slot 4 (XPT-32), Slot 11 (OUT-35), Slot 12 (OUT-35A), Slot 10 (FC-112)

Status area

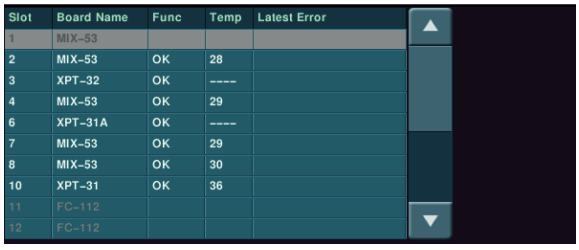

Function button area

Status area description

When the board is installed in a wrong slot or no board is installed in the slot, the slot number and name of the board that should be installed in the slot are displayed gray.

Items

Func: "OK" is indicated when the CPU on the board is working correctly, and "Error" is indicated if the CPU malfunctions.

Temp: The temperature (°C) measured by the onboard temperature sensor is displayed.
If the temperature exceeds the specified value (60 °C), the measured temperature is displayed yellow.

Latest Error: The date and time of the latest error are displayed.

Buttons

SWR1 button: This displays the Maintenance Main menu of Switcher 1.

SWR2 button: This displays the Maintenance Main menu of Switcher 2.

PNL button: This displays the Maintenance Main menu of PNL.

DME1 button: This displays the Maintenance Main menu of DME1.

DME2 button: This displays the Maintenance Main menu of DME2.

Maintenance Main button: This switches the menu to the Maintenance Main menu.

1-9-5. Maintenance PSU Menu

This menu displays the operating status and total operating hours of power supply units. This menu also resets the total operating hours.
This menu displays errors that require replacement of power supply units.

Notes

- As many power supply units as those required for the system operation must be working (MVS-8000X: 3 units, MVS-7000X: 2 units).
- This unit cannot distinguish a power supply unit failure from the power-off state. When all the power supply units are turned off in a predetermined time (10 seconds), the system determines that the power of the power supply units is off. Therefore, if an option power supply unit is installed with its power off, the power supply units is regarded as faulty though it is in a normal state.

Status area

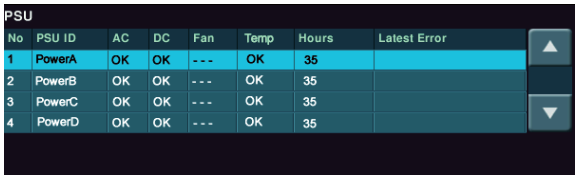

Function button area

Items

PSD ID: Power supply unit names are displayed.
If no power supply unit is installed, contents in the No and PSU ID columns are displayed gray.

Note

In the PSD ID columns, power supply unit names are written as PowerA, PowerB, . . . to identify each fan. For the installation location of these parts, refer to Section 1-1 “Location of Main Parts.”

AC, DC, Fan: The AC, DC, and fan states of each power supply unit are displayed.
“OK” is indicated when the power supply unit is working correctly, and “Error” is indicated if the power supply unit malfunctions.

Hours: The total operating time (hours) of each power supply unit is displayed.
If the total operating time exceeds the guaranteed value, it is displayed yellow.

Latest Error: The date and time of the latest error are displayed.

Buttons

SWR1 button:	This displays the Maintenance Main menu of Switcher 1.
SWR2 button:	This displays the Maintenance Main menu of Switcher 2.
PNL button:	This displays the Maintenance Main menu of PNL.
DME1 button:	This displays the Maintenance Main menu of DME1.
DME2 button:	This displays the Maintenance Main menu of DME2.
Set Operation Hours button:	This sets the total operating hours of the selected power supply unit.
Maintenance Main button:	This switches the menu to the Maintenance Main menu.

Resetting Total Operating Hours

When a power supply unit is replaced, its total operating hours must be reset.
Reset the total operating hours using the following procedure.

1. Select the replaced power supply unit from the status area.
2. Press the Set Operation Hours button.
   The confirmation message appears.

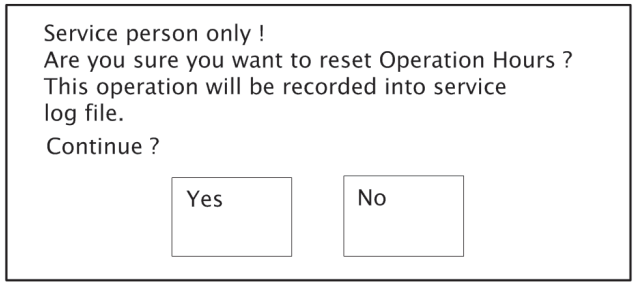

3. Press the Yes button.
   The numeric keypad window appears.
4. Enter “0” and press the Enter button.
5. Check that the total operating hours of the selected power supply unit is reset to “0” in the Hours column in the status area.

1-9-6. Maintenance Fan Menu

This menu displays the speed and total operating hours of fans. This menu also resets the total operating hours.
This menu displays errors that require replacement of fans.

Status area

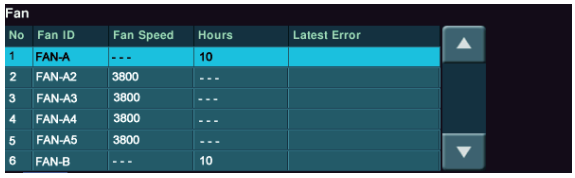

Function button area

Items

Fan ID: Fan names are displayed.

Note

In the Fan ID columns, individual fan names are written as FAN-A2, FAN-B2, and fan unit names are written as FAN-A, FAN-B . . . to identify each fan. For the installation location of these parts, refer to Section 1-1 “Location of Main Parts.”

Hours: The total operating time (hours) of each fan unit is displayed.
If the total operating time exceeds the guaranteed value, it is displayed yellow.

Fan Speed: The individual fan speed (rpm) of each fan is displayed.
It is displayed for each fan unit as “- - -”.
When the fan is not working or is not installed, “0” is indicated.
If the fan speed is outside the specified range, it is displayed yellow.

Latest Error: The date and time of the latest error are displayed.

Buttons

SWR1 button: This displays the Maintenance Main menu of Switcher 1.
SWR2 button: This displays the Maintenance Main menu of Switcher 2.
PNL button: This displays the Maintenance Main menu of PNL.
DME1 button: This displays the Maintenance Main menu of DME1.
DME2 button: This displays the Maintenance Main menu of DME2.
Set Operation Hours button: This sets the total operating hours of the selected fan.
Maintenance Main button: This switches the menu to the Maintenance Main menu.

Resetting Total Operating Hours

When a fan is replaced, its total operating hours must be reset.
Reset the total operating hours using the following procedure.

1. Select the replaced fan from the status area.
2. Press the Set Operation Hours button.
   The confirmation message appears.

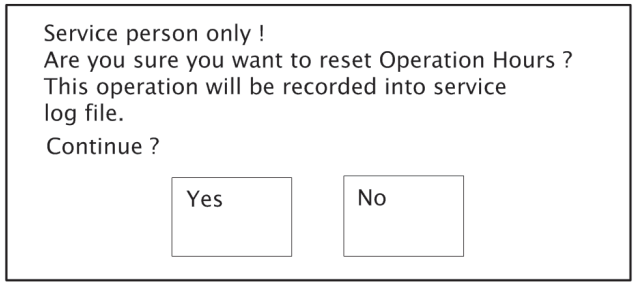

3. Press the Yes button.
   The numeric keypad window appears.
4. Enter “0” and press the Enter button.
5. Check that the total operating hours of the selected fan is reset to “0” in the Hours column in the status area.

1-9-7. Error Indication and Action

Errors as a result of the self-diagnosis and actions to be taken can be displayed with these menus.

Menu	Error Indication	Action
Maintenance Circuit Board	“Error” is indicated in the Func column.	Replace the faulty board. (Refer to Section 1-1.)
Maintenance PSU	“Error” is indicated in the AC, DC, or Fan column.	Replace the faulty power supply unit. (Refer to Section 1-2-2.)
	A value in the Hours column of a power supply unit is displayed yellow.	After replacement, reset the total operating hours. (Refer to Section 1-9-5.)
Maintenance Fan	A fan speed value is displayed yellow.	Replace the faulty fan. (Refer to Section 1-2-3.)
	A value in the Hours column of a fan is displayed yellow.	After replacement, reset the total operating hours. (Refer to Section 1-9-6.)

Section 2
Spare Parts

2-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

2-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。

3. 部品の在庫

部品表の SP（Supply code）欄に “o” で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号の記載されていないハーネスは，サービス部品として登録されていません。

2-2. Exploded Views

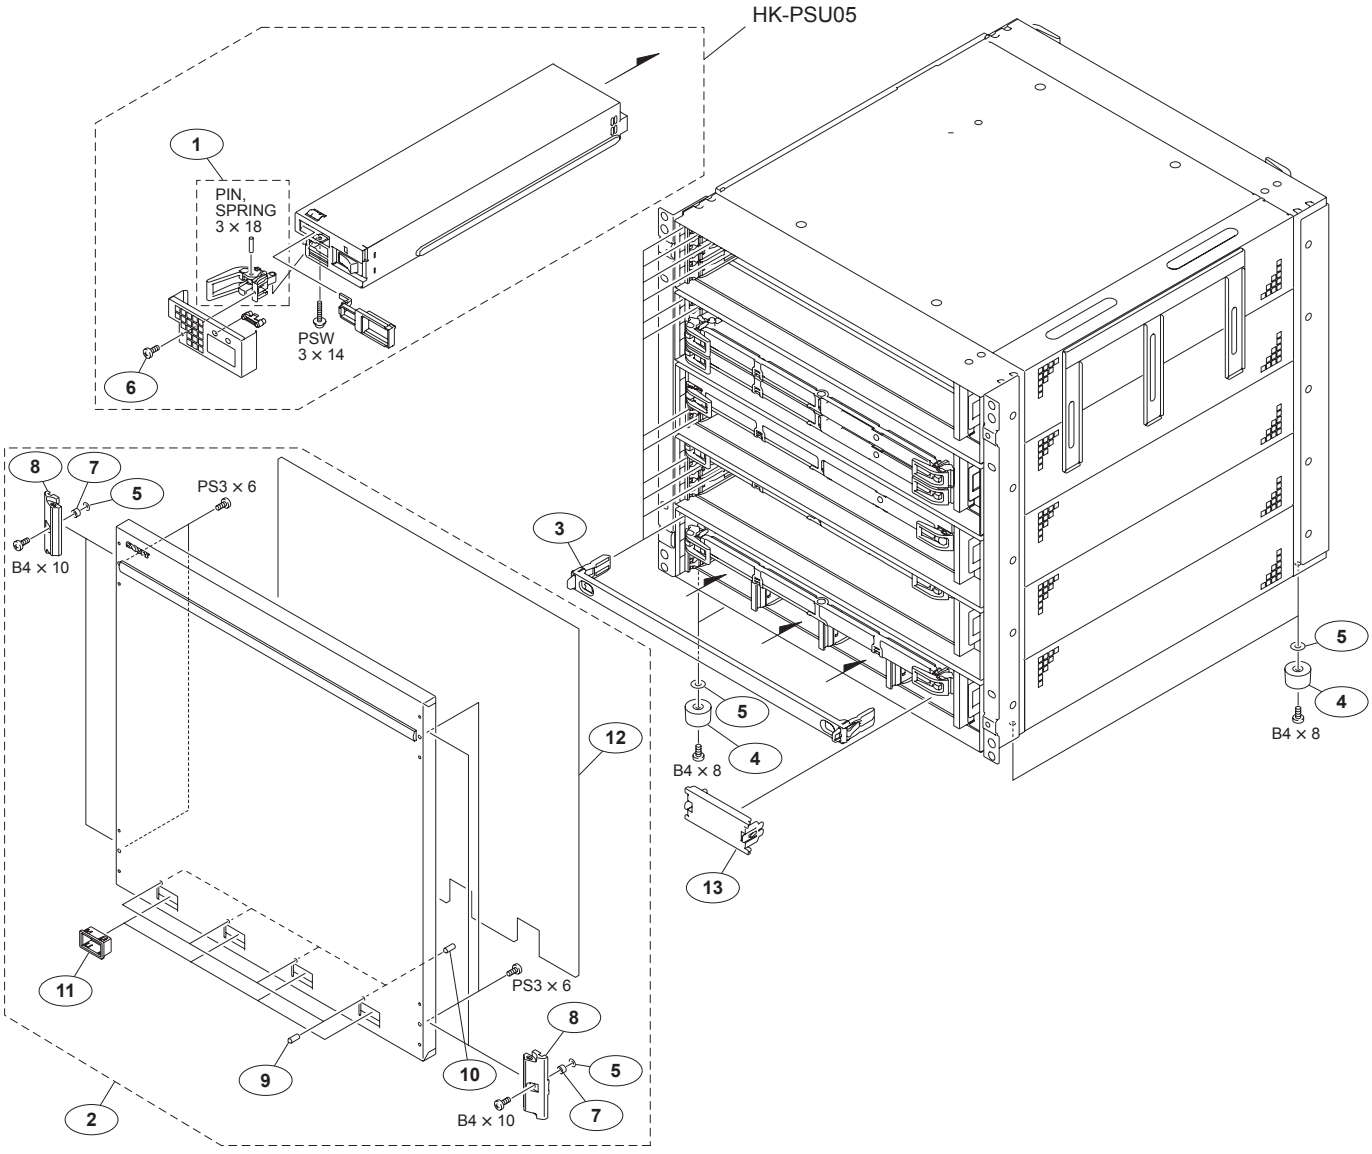

No.	Part No.	SP	Description
1	A-1771-684-A	s	BOARD LEVER F ASSY
2	A-1772-825-A	s	DOOR ASSY, FRONT
3	A-1778-014-A	s	ASSY, FRONT BK 1/1
4	X-3605-751-1	s	FOOT ASSY
5	3-650-537-01	s	WASHER
6	3-725-295-21	s	SCREW, (+) (B3)
7	3-994-237-01	s	SPACER
8	4-170-582-01	s	BRACKET, PANEL
9	4-170-583-01	s	LIGHT GUIDE
10	4-183-466-01	s	HOLDER
11	4-183-472-01	s	ESCUTCHEON
12	4-184-219-01	s	FILTER
13	4-186-134-01	s	PANEL PSBK
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-561-09	s	SCREW +B 4X8
	7-682-562-04	s	SCREW +B 4X10
	7-682-647-01	s	SCREW +PS 3X6
	7-682-951-01	s	SCREW +PSW 3X14

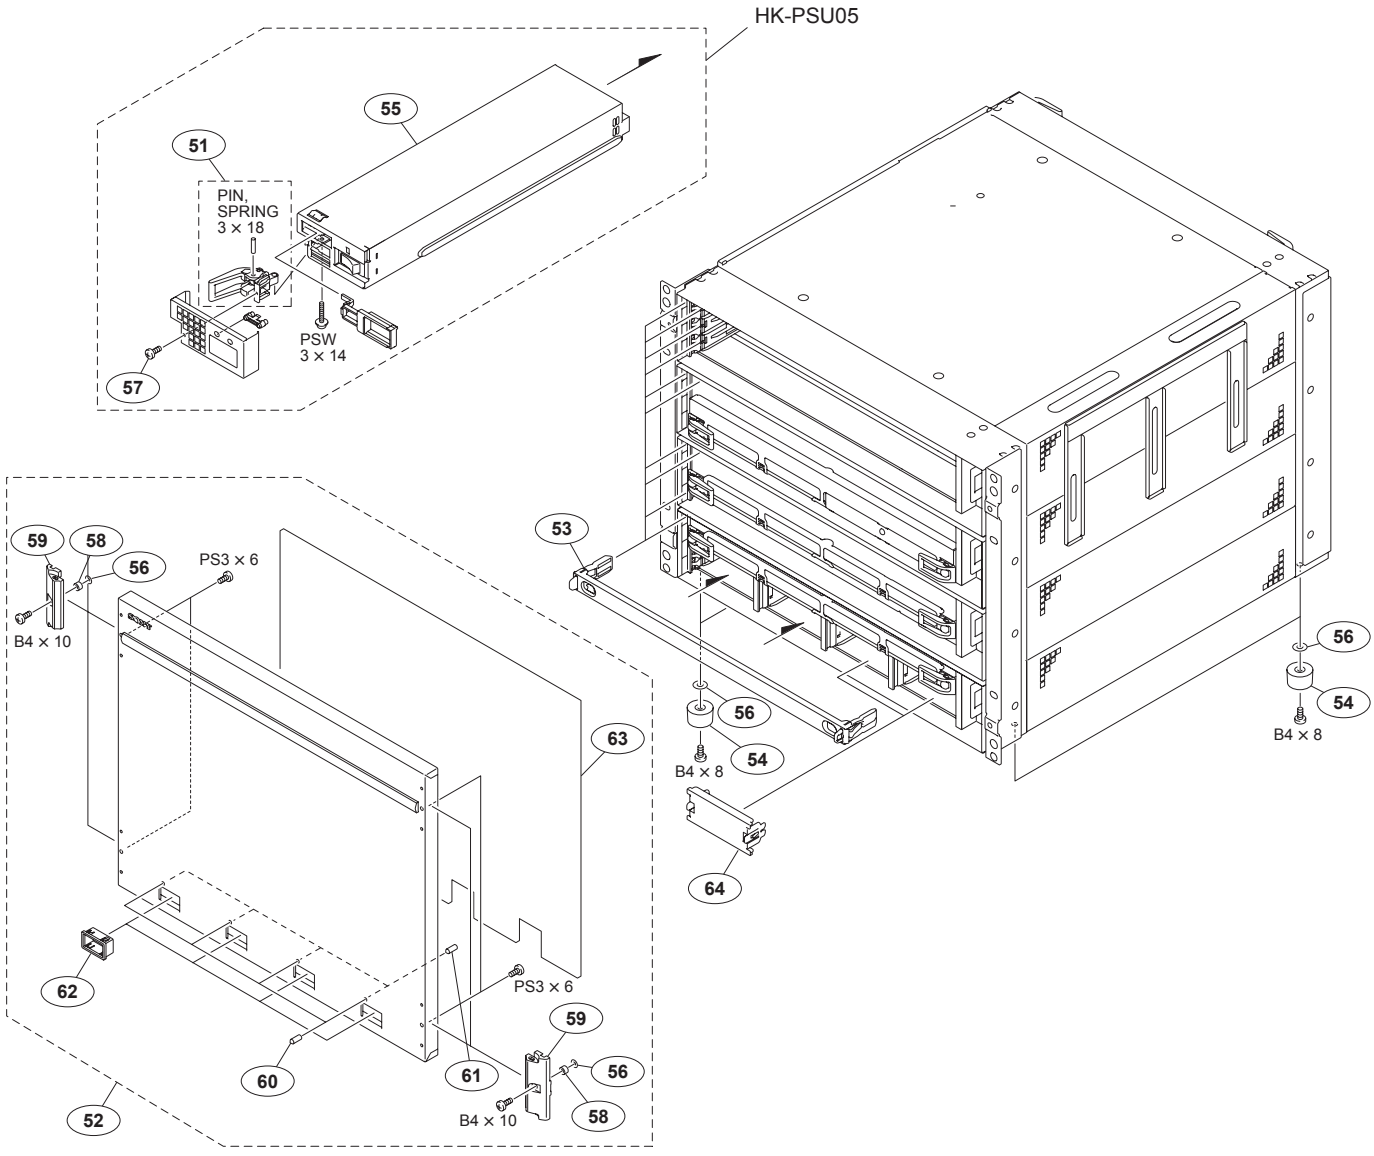

No.	Part No.	SP	Description
51	A-1771-684-A	s	BOARD LEVER F ASSY
52	A-1796-944-A	s	DOOR ASSY, FRONT
53	A-1778-014-A	s	ASSY, FRONT BK 1/1
54	X-3605-751-1	s	FOOT ASSY
55	1-474-155-11	s	REGULATOR, SWITCHING
56	3-650-537-01	s	WASHER
57	3-725-295-21	s	SCREW, (+) (B3)
58	3-994-237-01	s	SPACER
59	4-170-582-02	s	BRACKET, PANEL
60	4-170-583-01	s	LIGHT GUIDE
61	4-183-466-01	s	HOLDER
62	4-183-472-01	s	ESCUTCHEON
63	4-261-862-01	s	FILTER
64	4-186-134-01	s	PANEL PSBK
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-561-09	s	SCREW +B 4X8
	7-682-562-04	s	SCREW +B 4X10
	7-682-647-01	s	SCREW +PS 3X6
	7-682-951-01	s	SCREW +PSW 3X14

AC Inlet Assembly (MVS-8000X)

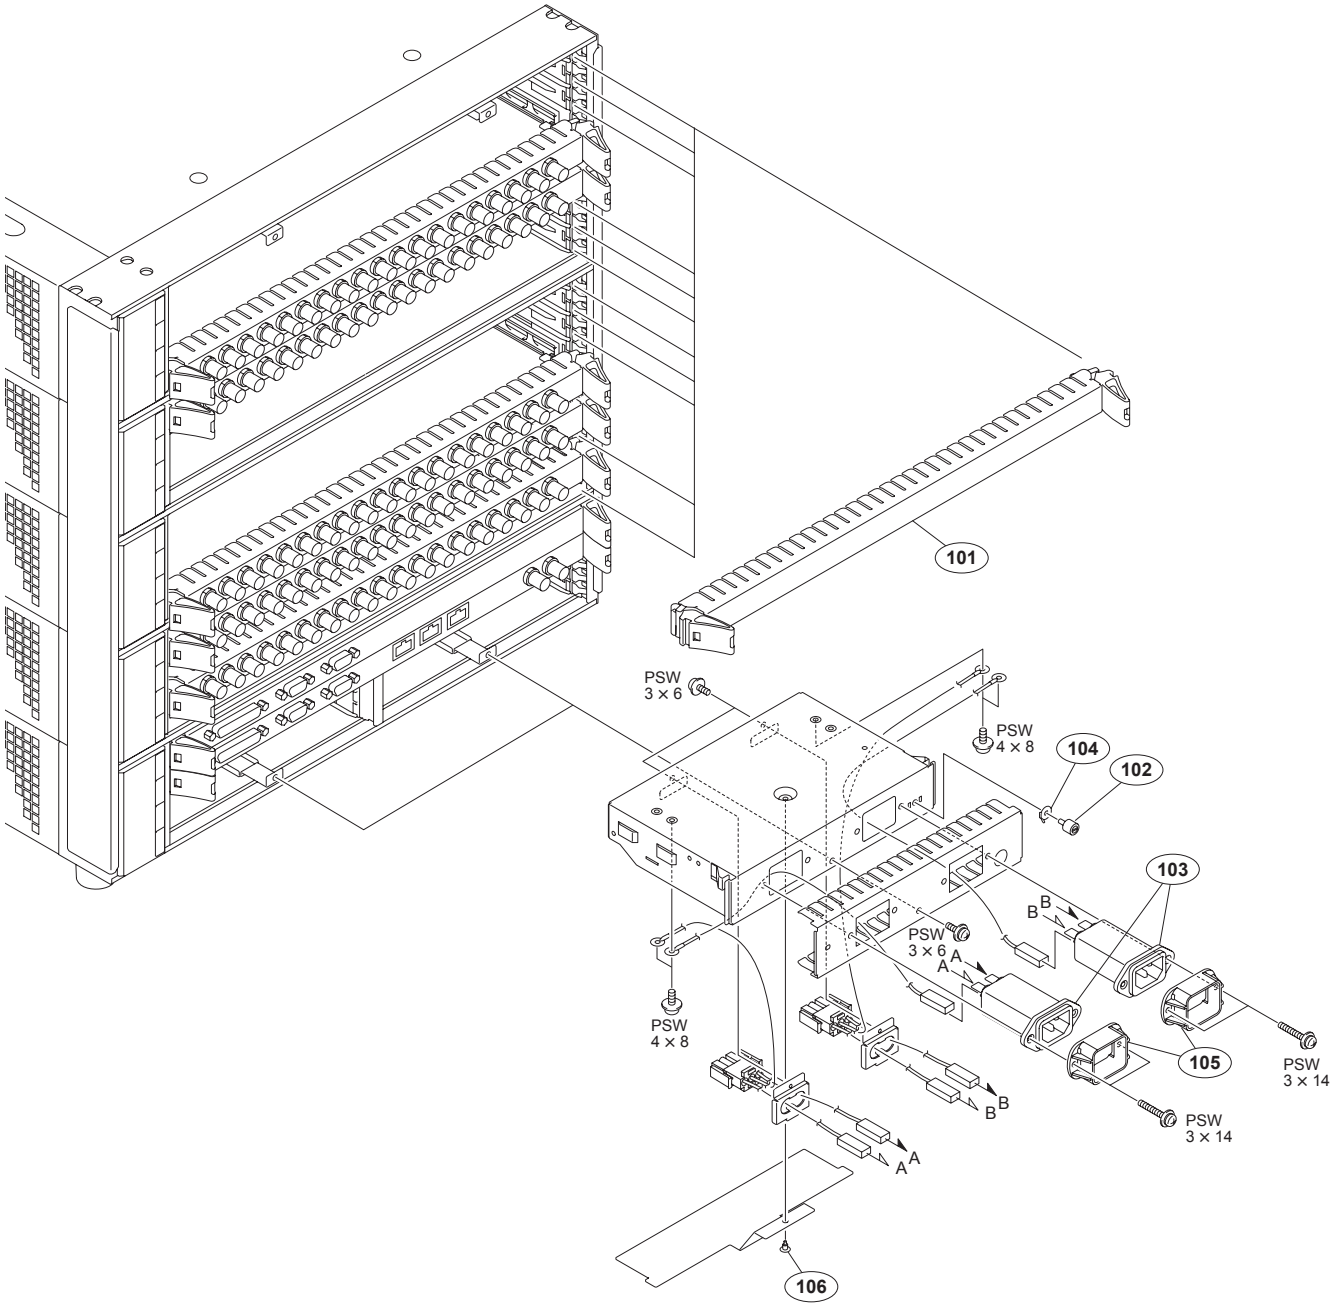

No.	Part No.	SP	Description
101	A-1778-015-A	s	ASSY, CN BK 1/1
102	X-2068-004-1	s	TERMINAL ASSY
103 ⚠	1-817-834-11	s	AC INLET
104	2-068-008-01	s	WASHER
105	2-990-241-02	s	HOLDER (A), PLUG
106	3-531-576-51	o	RIVET
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14
	7-682-961-01	s	SCREW +PSW 4X8

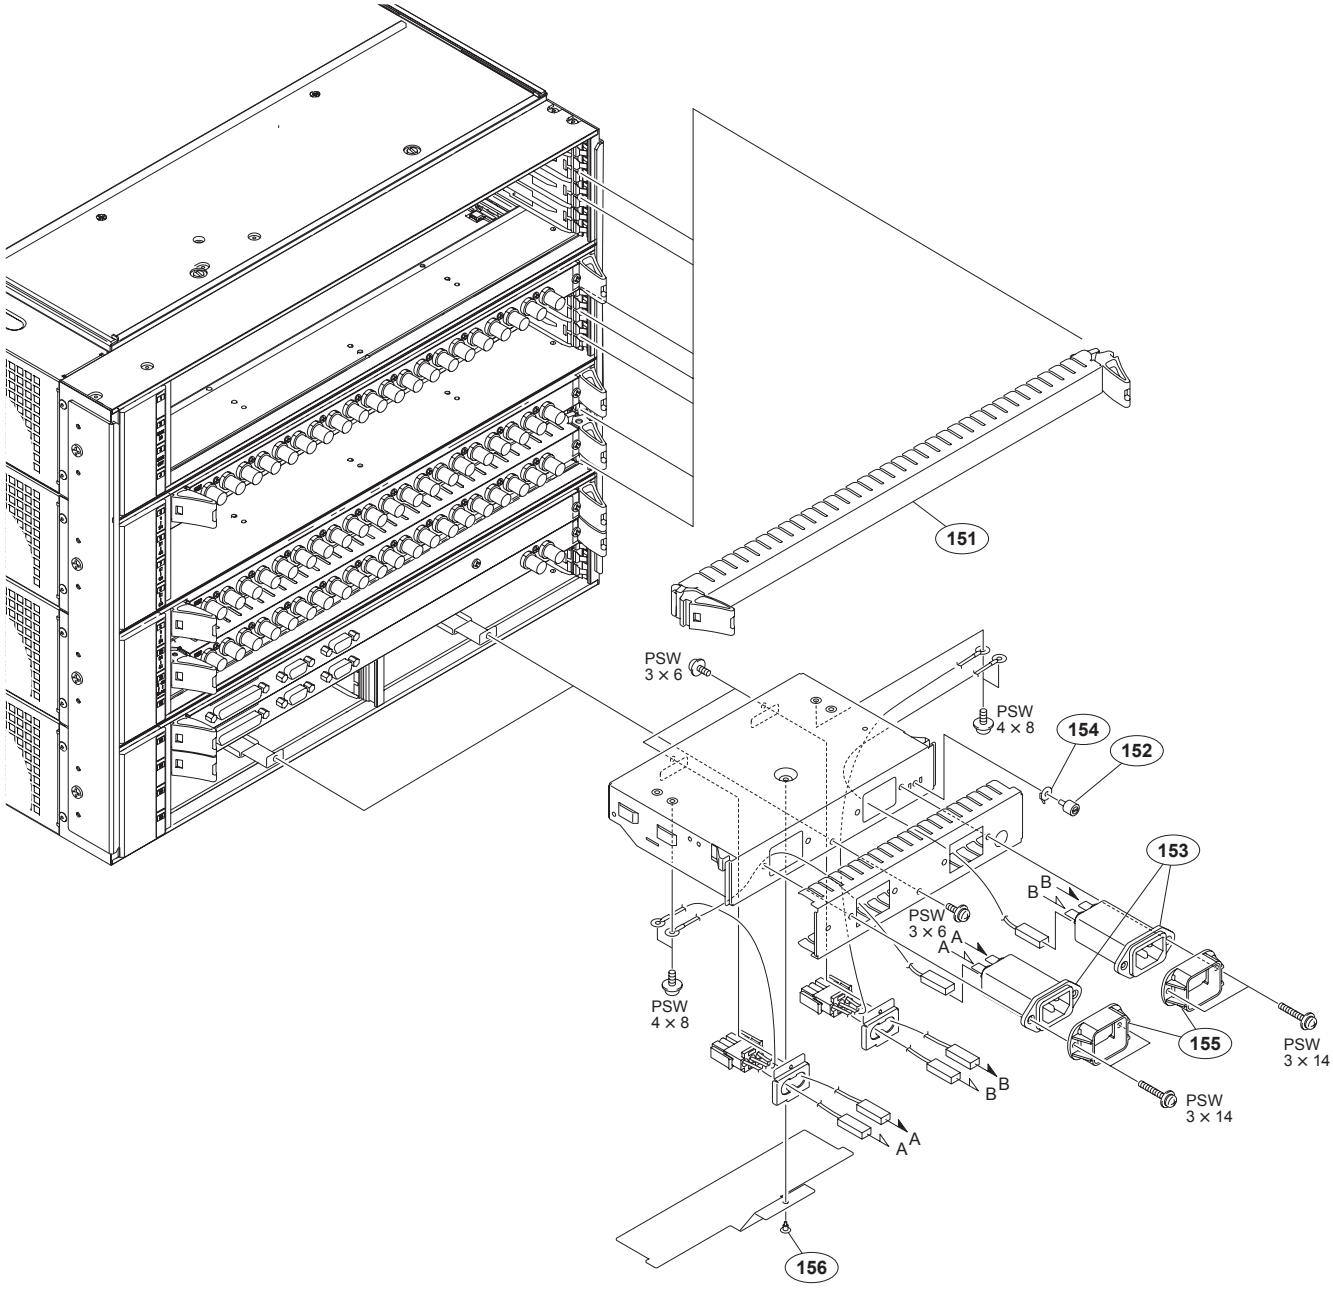

No.	Part No.	SP	Description
151	A-1778-015-A	s	ASSY, CN BK 1/1
152	X-2068-004-1	s	TERMINAL ASSY
153 ⚠	1-817-834-11	s	AC INLET
154	2-068-008-01	s	WASHER
155	2-990-241-02	s	HOLDER (A), PLUG
156	3-531-576-51	o	RIVET
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14
	7-682-961-01	s	SCREW +PSW 4X8

CA-82 Board (MVS-8000X)

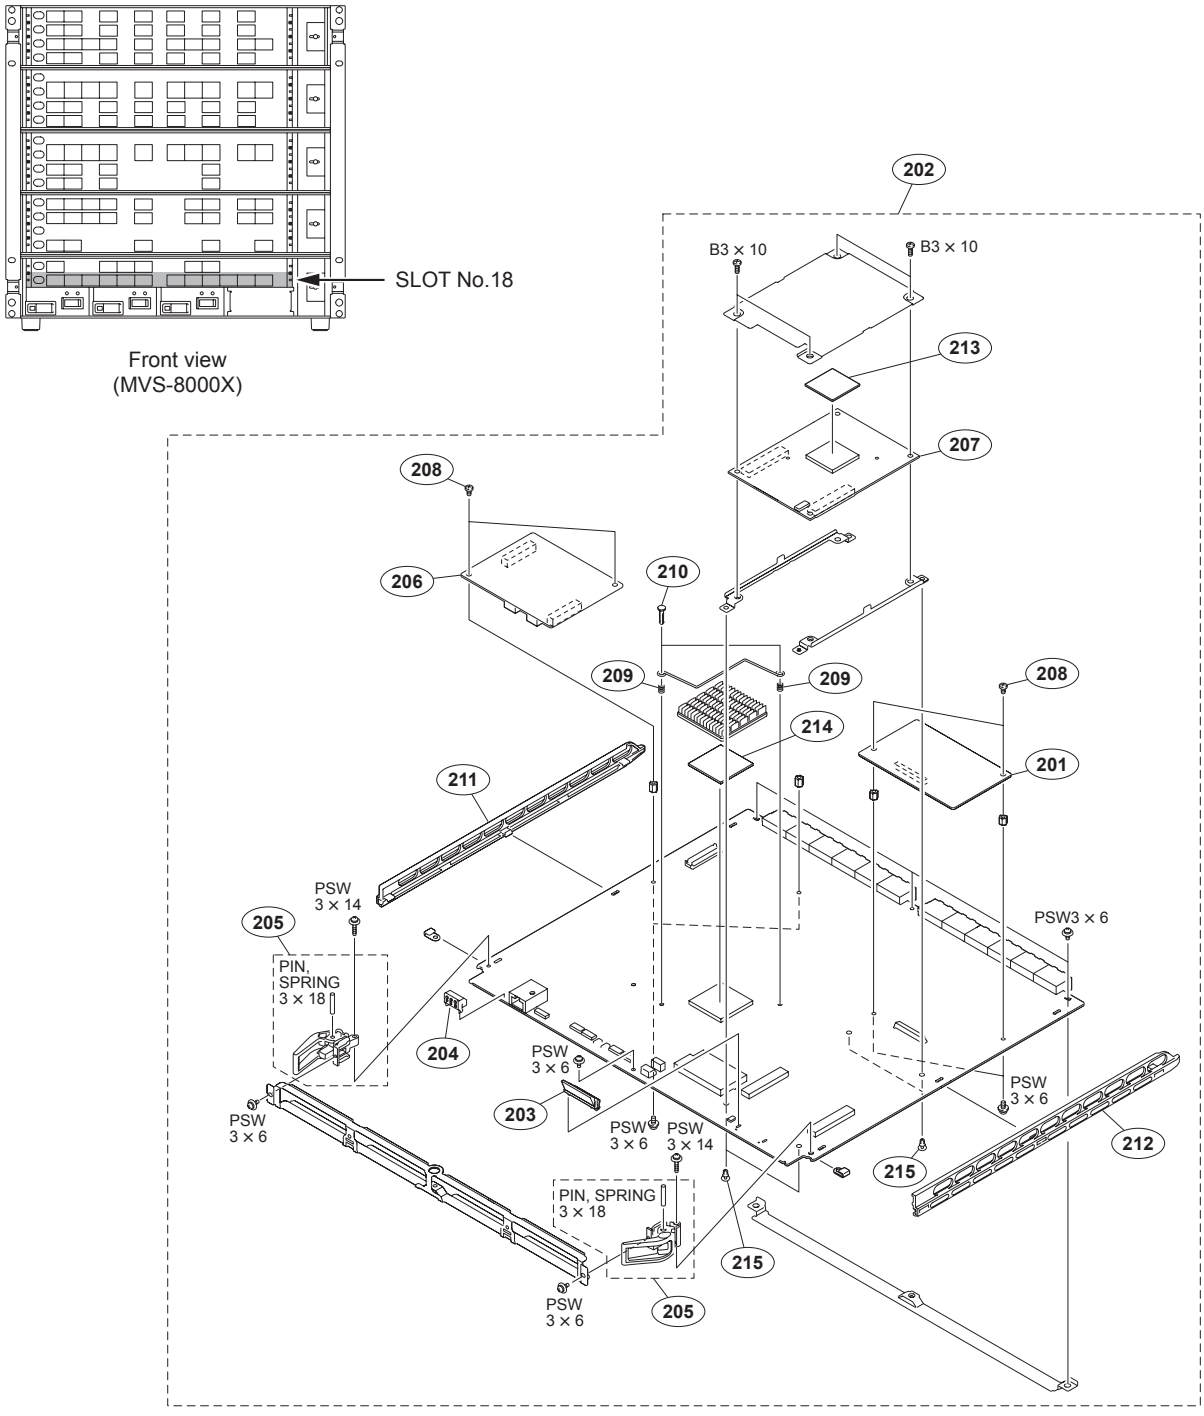

No.	Part No.	SP	Description
201	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
202	A-1769-187-A	s	CA-82 ASSY
203	A-1771-682-A	s	ASSY, 7SEG
204	A-1771-683-A	s	ASSY, PBS
205	A-1771-684-A	s	BOARD LEVER F ASSY
206	A-1780-672-A	s	MOUNTED CIRCUIT BOARD, SG-272A
207	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
208	3-725-295-21	s	SCREW, (+) (B3)
209	4-143-557-01	s	SPRING, COMPRESSION
210	4-143-559-01	s	PIN, PUSH

No.	Part No.	SP	Description
211	4-183-378-01	s	PC BOARD GUARD FL
212	4-183-379-01	s	PC BOARD GUARD FR
213	4-187-619-01	s	SHEET,RADIATION(25X25X2)
214	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
215	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-549-09	s	SCREW +B 3X10
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

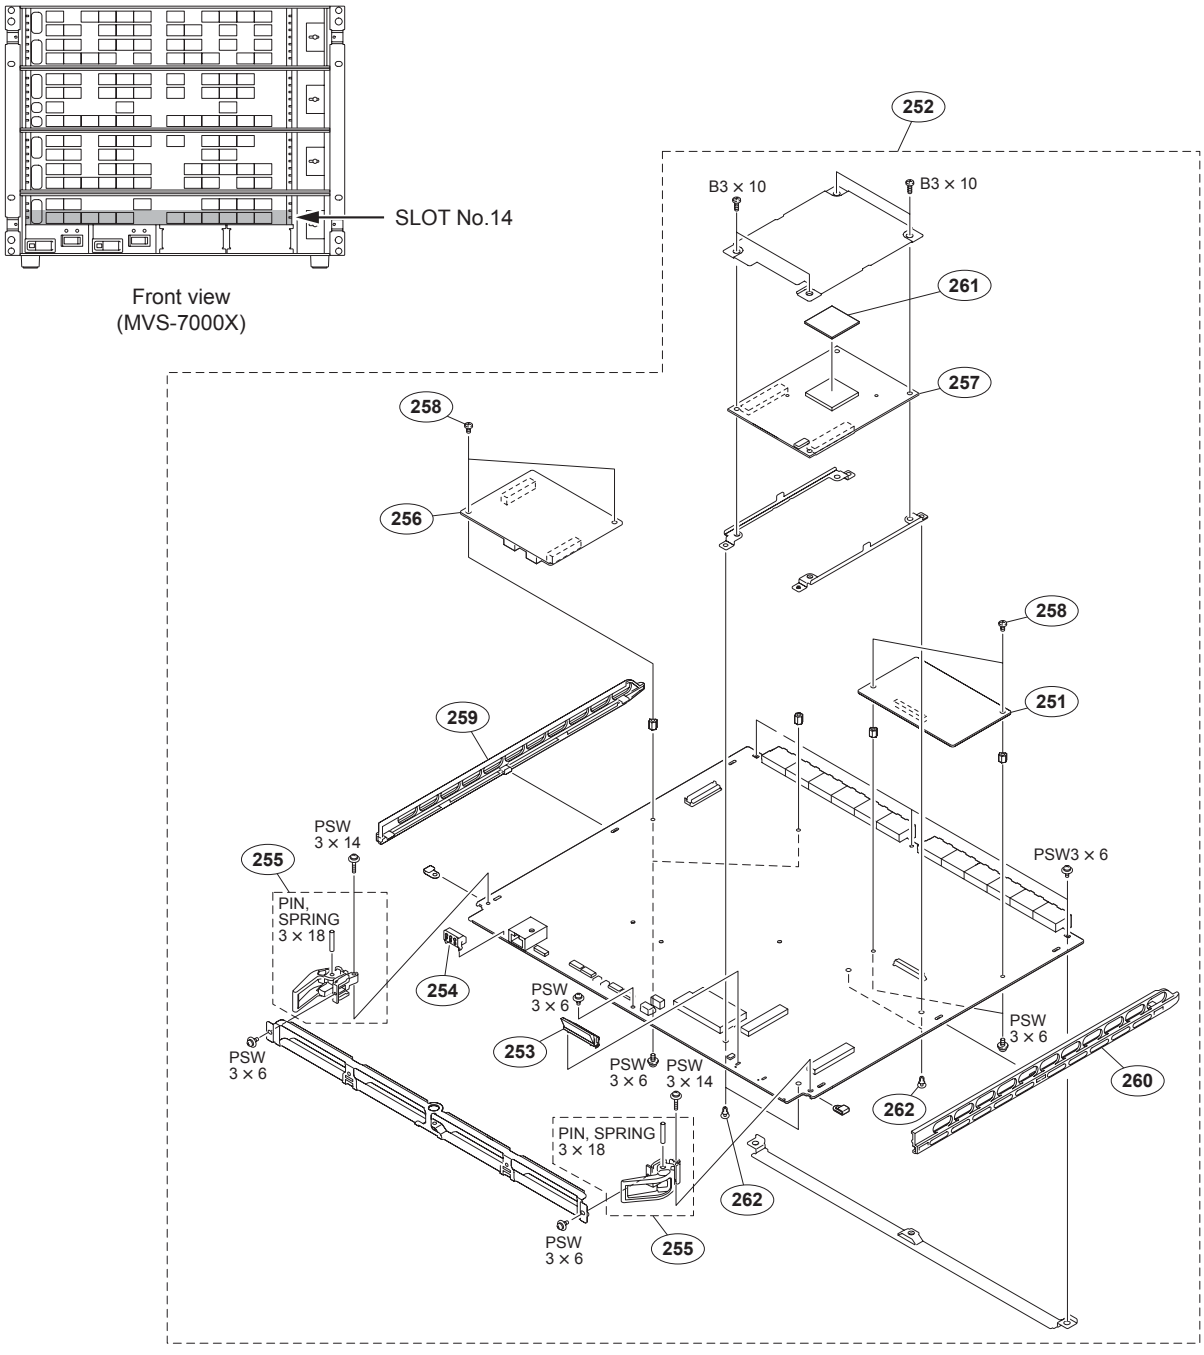

No.	Part No.	SP	Description
251	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
252	A-1827-626-A	s	CA-82CF ASSY
253	A-1771-682-A	s	ASSY, 7SEG
254	A-1771-683-A	s	ASSY, PBS
255	A-1771-684-A	s	BOARD LEVER F ASSY
256	A-1780-672-A	s	MOUNTED CIRCUIT BOARD, SG-272A
257	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
258	3-725-295-21	s	SCREW, (+) (B3)
259	4-183-378-01	s	PC BOARD GUARD FL
260	4-183-379-01	s	PC BOARD GUARD FR

No.	Part No.	SP	Description
261	4-187-619-01	s	SHEET,RADIATION(25X25X2)
262	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-549-09	s	SCREW +B 3X10
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

MIX-53 Board (MKS-7210X/MKS-8210X/MVS-7000X/MVS-8000X)

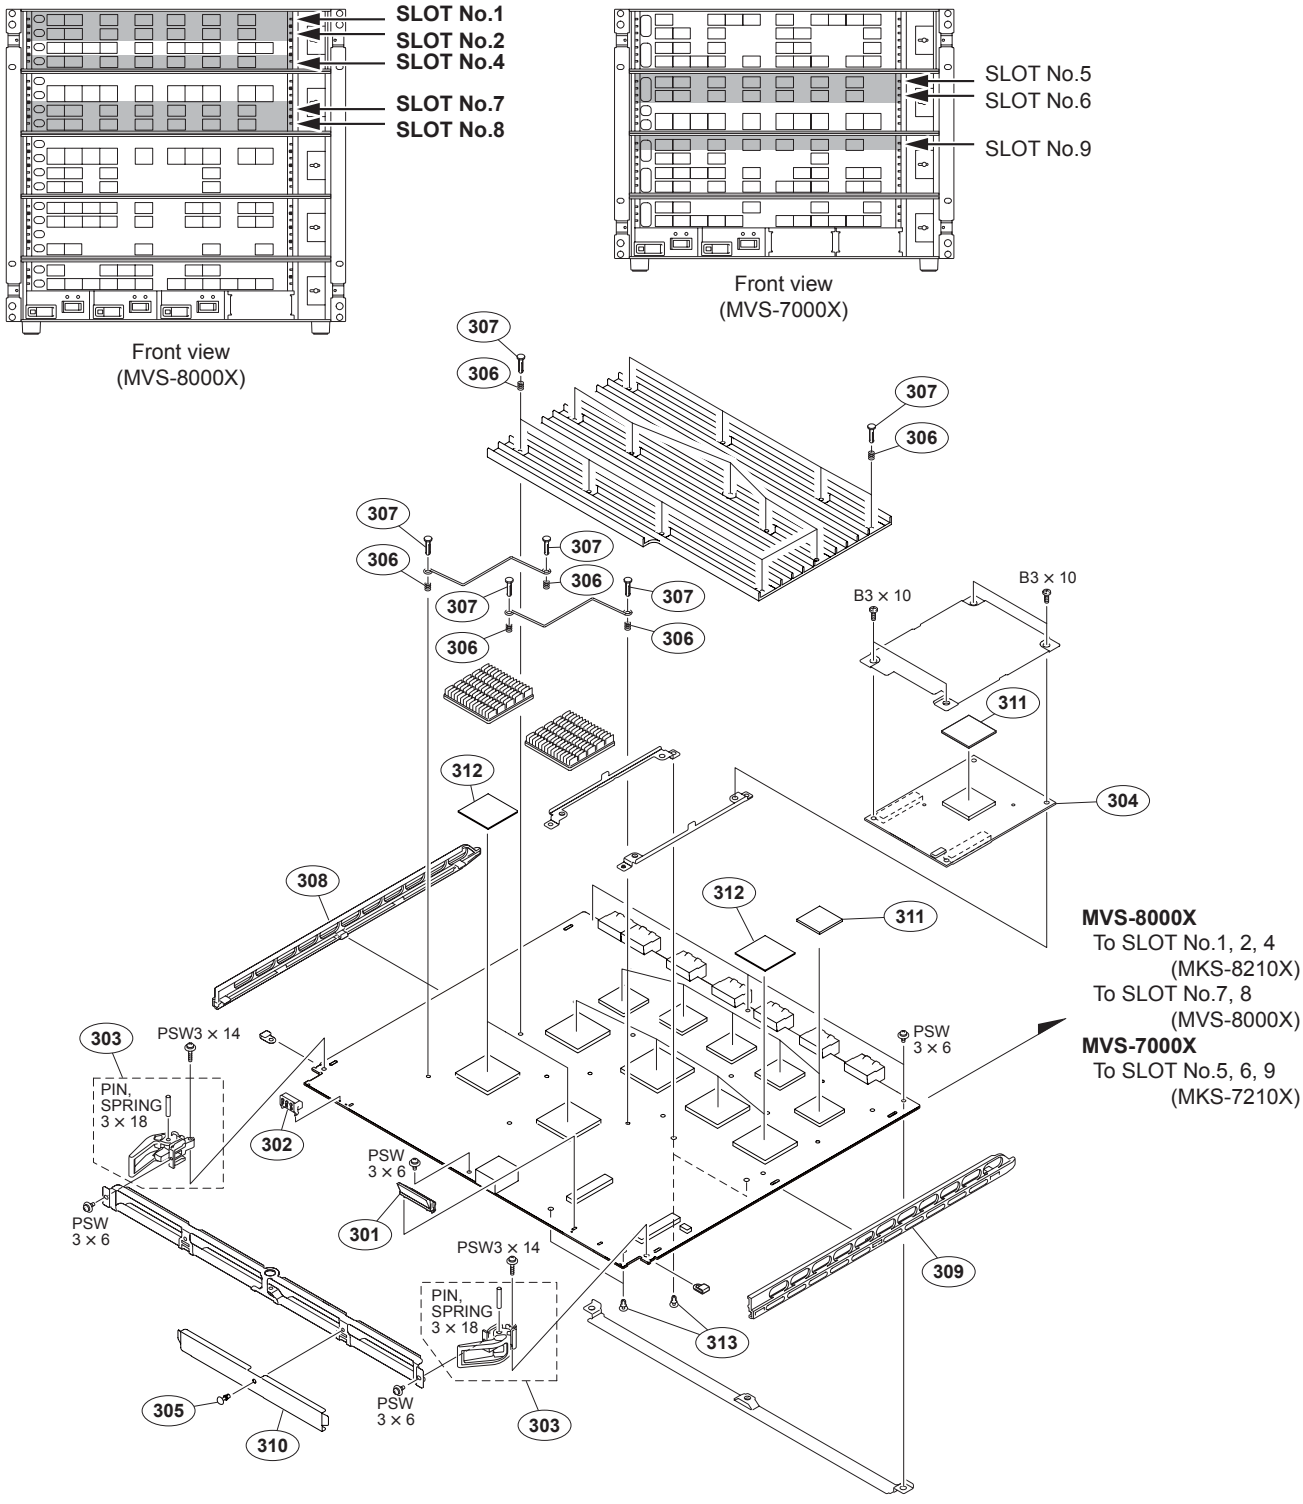

No.	Part No.	SP	Description
301	A-1771-682-A	s	ASSY, 7SEG
302	A-1771-683-A	s	ASSY, PBS
303	A-1771-684-A	s	BOARD LEVER F ASSY
304	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
305	3-531-576-51	o	RIVET
306	4-143-557-01	s	SPRING, COMPRESSION
307	4-143-559-01	s	PIN, PUSH
308	4-183-378-01	s	PC BOARD GUARD FL
309	4-183-379-01	s	PC BOARD GUARD FR
310	4-183-612-01	s	SHEET, WIND SHIELDING
311	4-187-619-01	s	SHEET,RADIATION(25X25X2)
312	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
313	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-549-09	s	SCREW +B 3X10
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

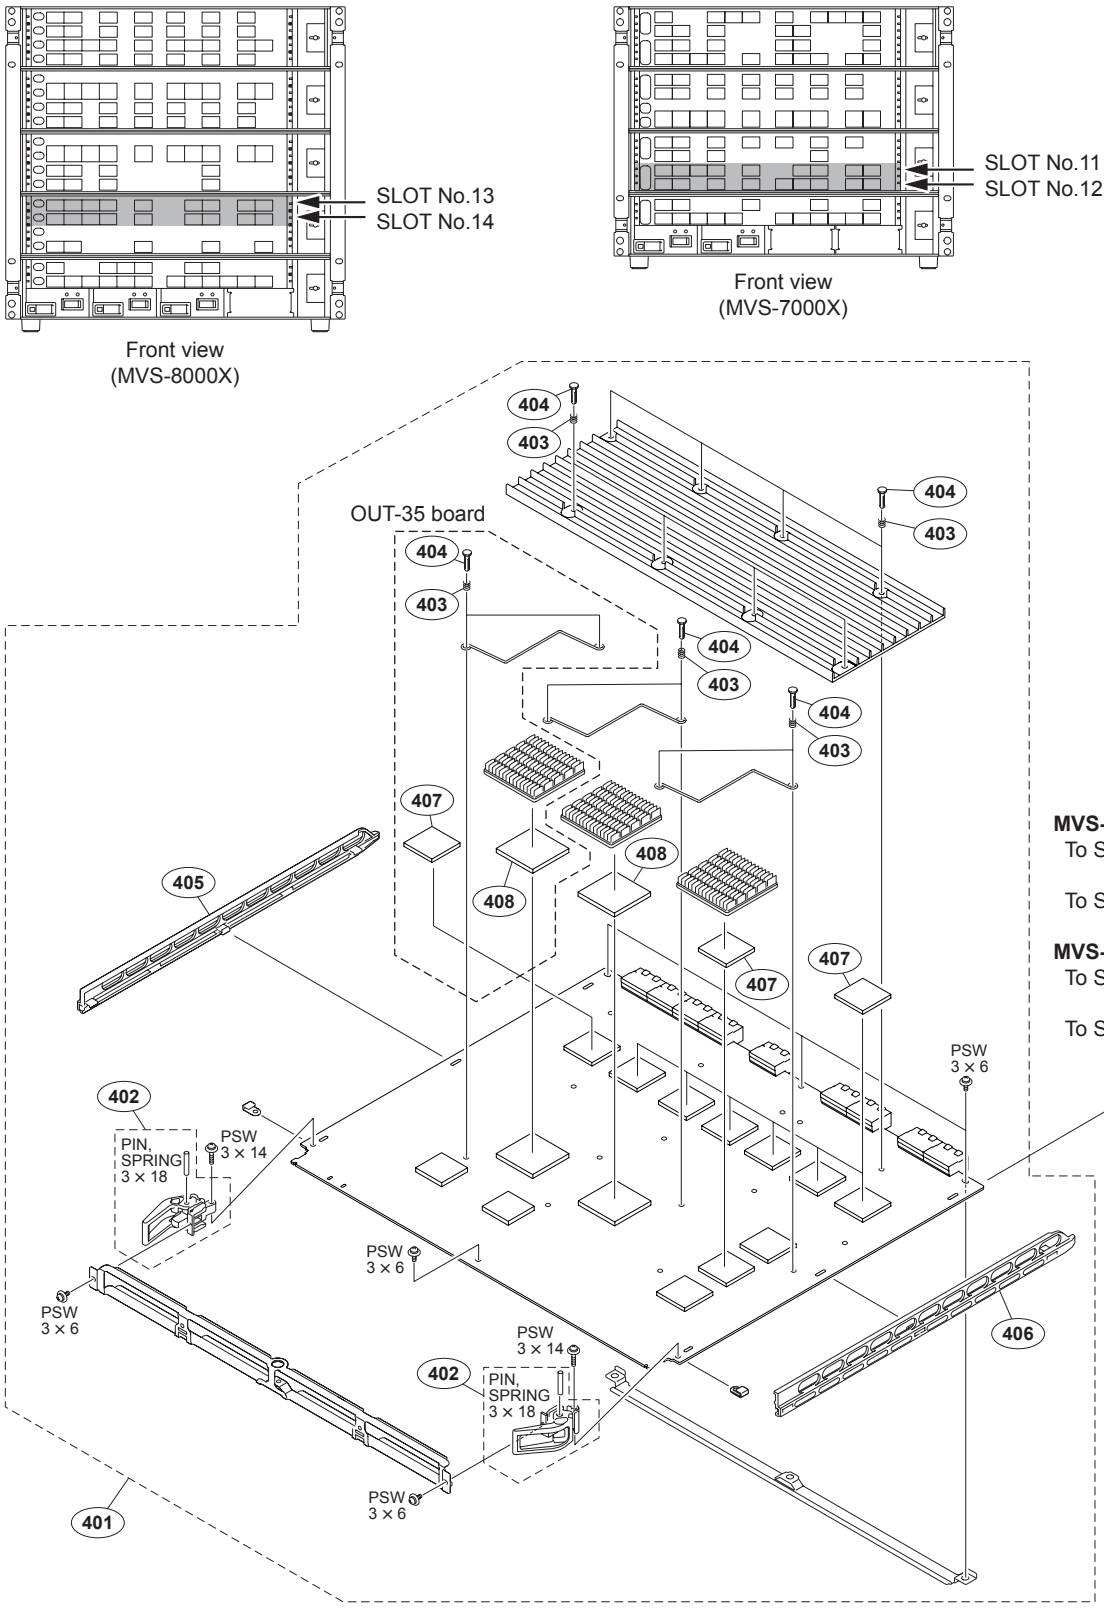

No.	Part No.	SP	Description
401	A-1775-430-A	s	MOUNTED CIRCUIT BOARD, OUT-35 (MVS-7000X/8000X)
402	A-1771-684-A	s	BOARD LEVER F ASSY
403	4-143-557-01	s	SPRING, COMPRESSION
404	4-143-559-01	s	PIN, PUSH
405	4-183-378-01	s	PC BOARD GUARD FL
406	4-183-379-01	s	PC BOARD GUARD FR
407	4-187-619-01	s	SHEET,RADIATION(25X25X2)
408	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

XPT-31 (MVS-7000X/8000X)/XPT-31A (MKS-8180X) Board

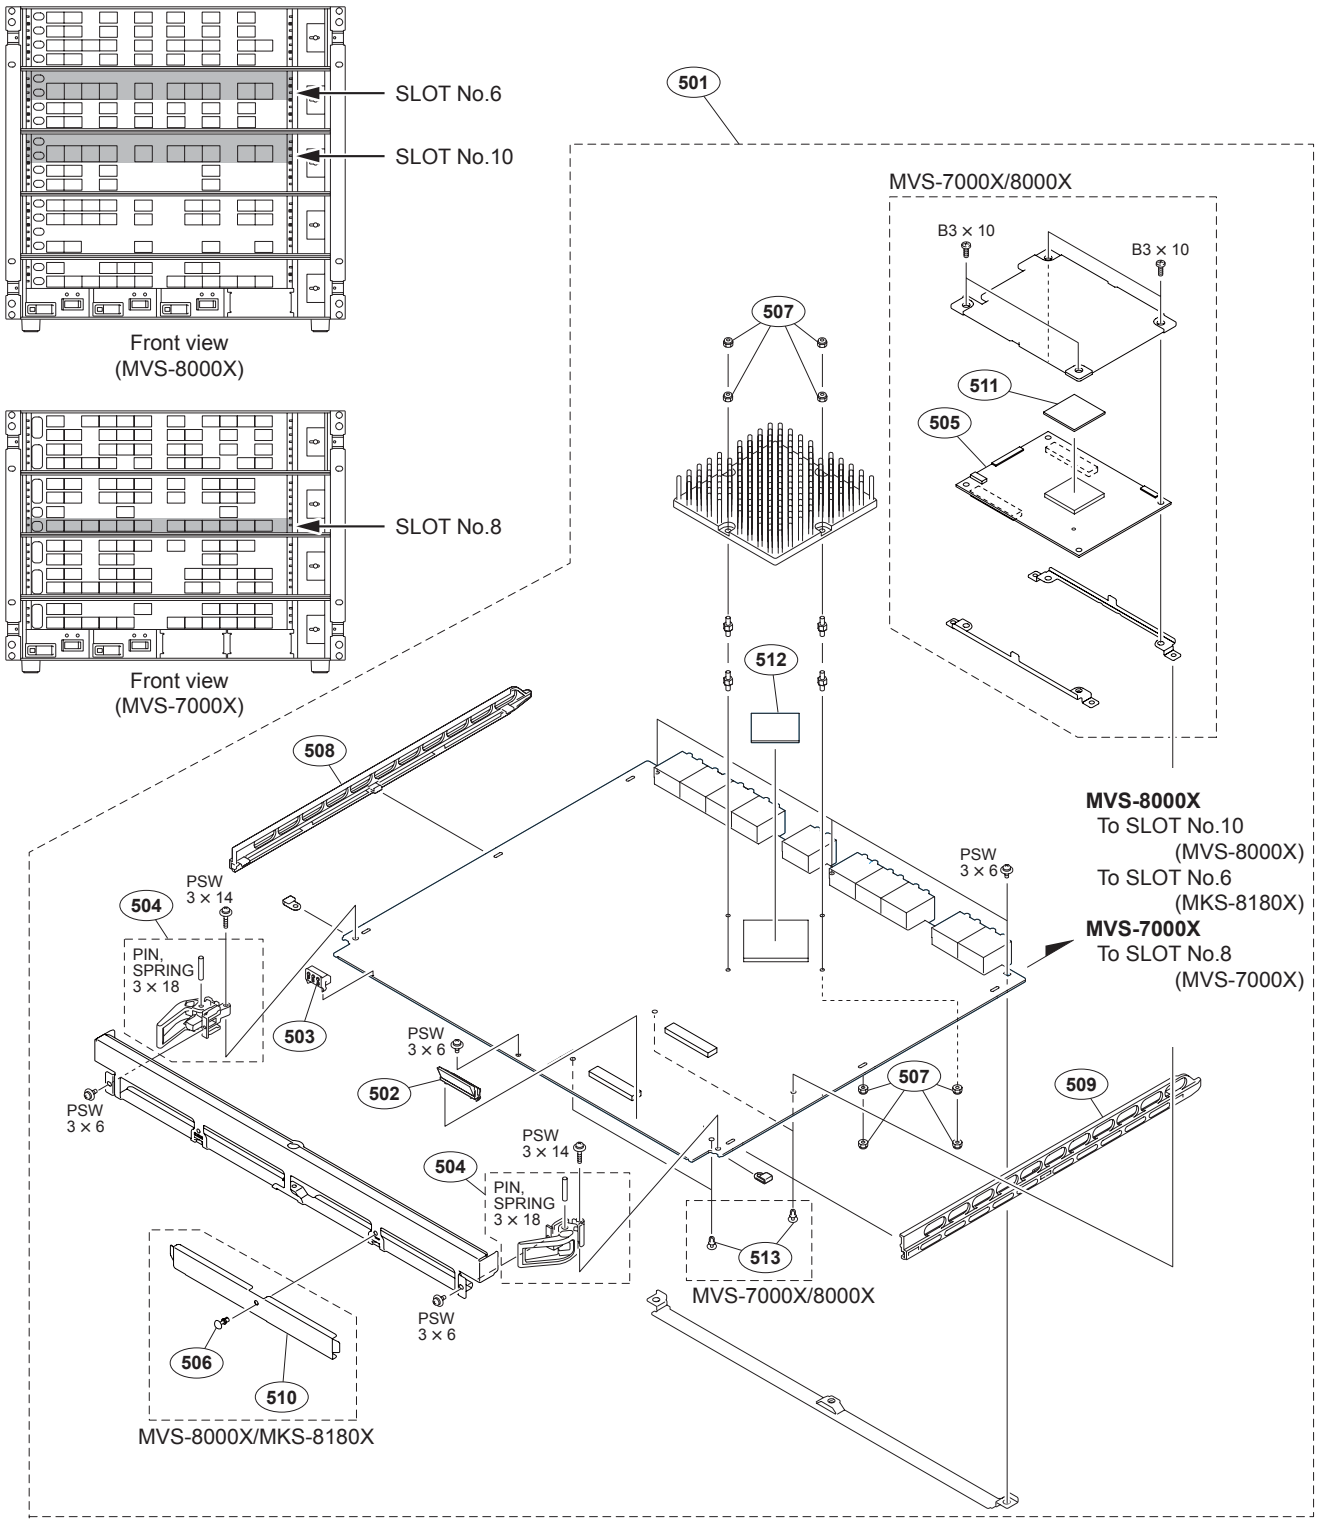

No.	Part No.	SP	Description
501	A-1718-302-A	s	MOUNTED CIRCUIT BOARD, XPT-31 (MVS-7000X/8000X)
502	A-1771-682-A	s	ASSY, 7SEG
503	A-1771-683-A	s	ASSY, PBS
504	A-1771-684-A	s	BOARD LEVER F ASSY
505	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE) (MVS-7000X/8000X)
506	3-531-576-51	o	RIVET
507	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
508	4-183-378-01	s	PC BOARD GUARD FL
509	4-183-379-01	s	PC BOARD GUARD FR
510	4-183-612-01	s	SHEET, WIND SHIELDING
511	4-187-619-01	s	SHEET,RADIATION(25X25X2)
512	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
513	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-549-09	s	SCREW +B 3X10 (MVS-7000X/8000X)
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

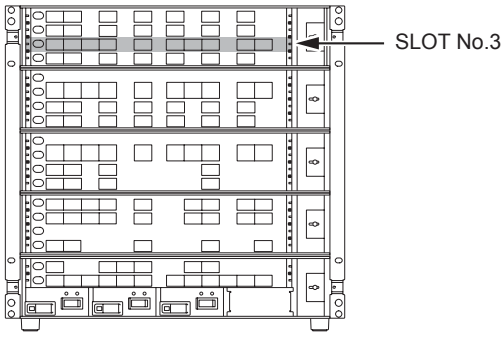

Front view
(MVS-8000X)

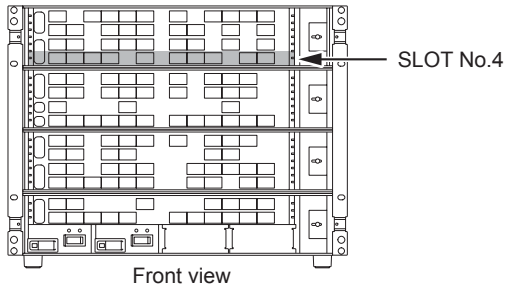

Front view
(MVS-7000X)

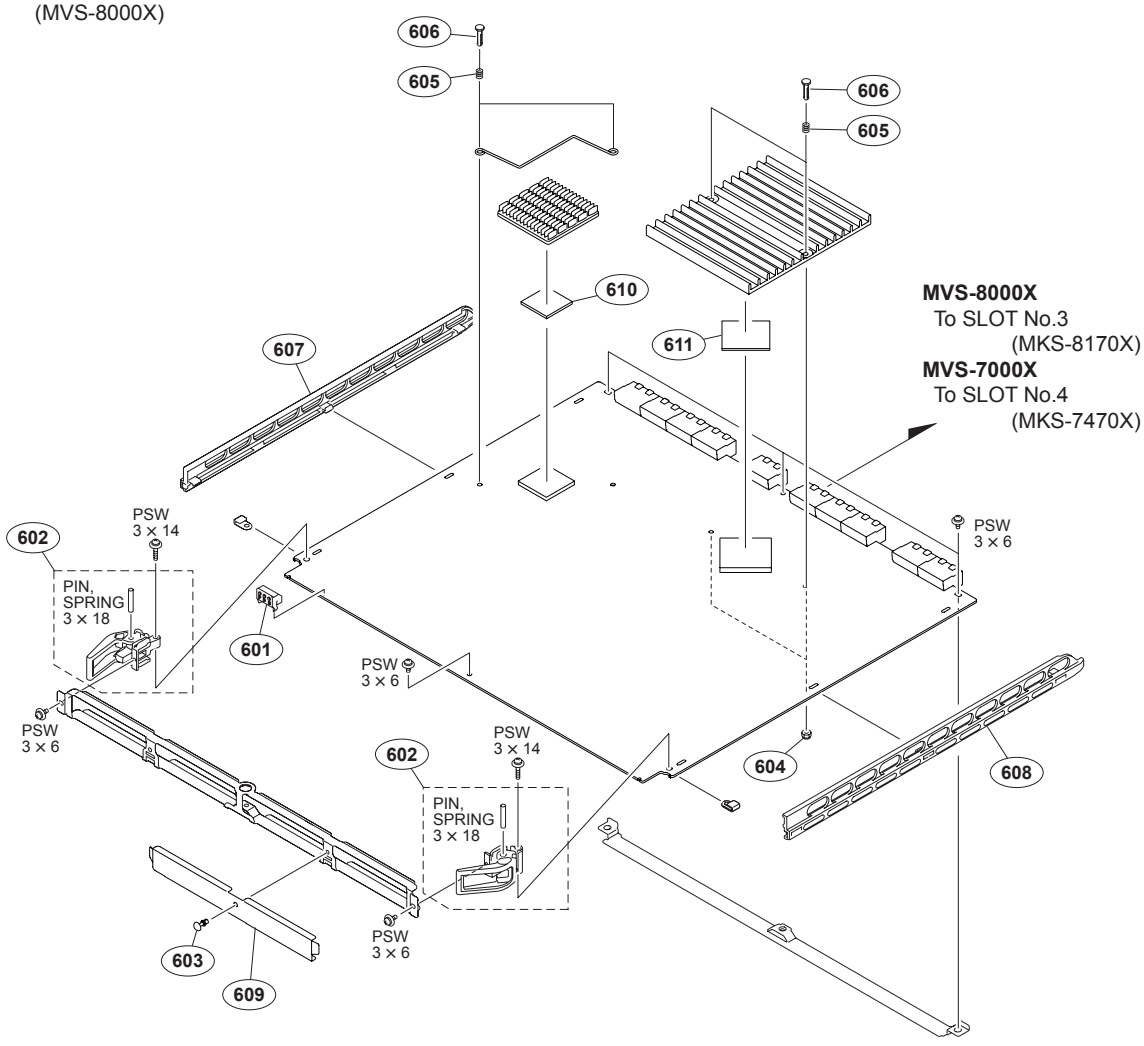

No.	Part No.	SP	Description
601	A-1771-683-A	s	ASSY, PBS
602	A-1771-684-A	s	BOARD LEVER F ASSY
603	3-531-576-51	o	RIVET
604	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
605	4-143-557-01	s	SPRING, COMPRESSION
606	4-143-559-01	s	PIN, PUSH
607	4-183-378-01	s	PC BOARD GUARD FL
608	4-183-379-01	s	PC BOARD GUARD FR
609	4-183-612-01	s	SHEET, WIND SHIELDING
610	4-187-619-01	s	SHEET,RADIATION(25X25X2)

No.	Part No.	SP	Description
611	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

CN-3234 Board (MVS-7000X/8000X)

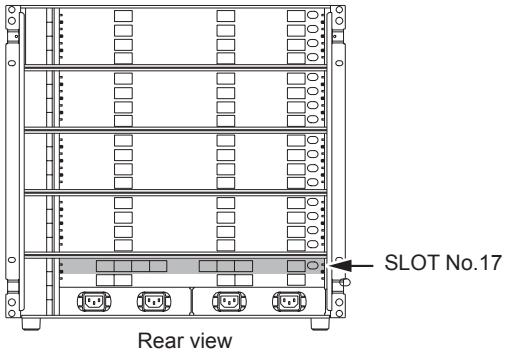

Rear view
(MVS-8000X)

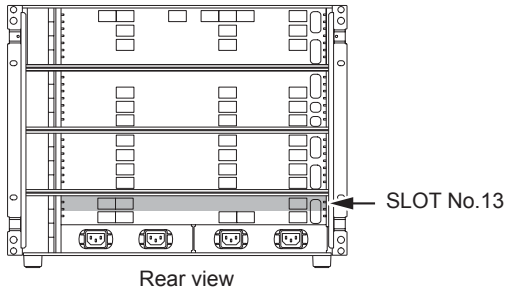

Rear view
(MVS-7000X)

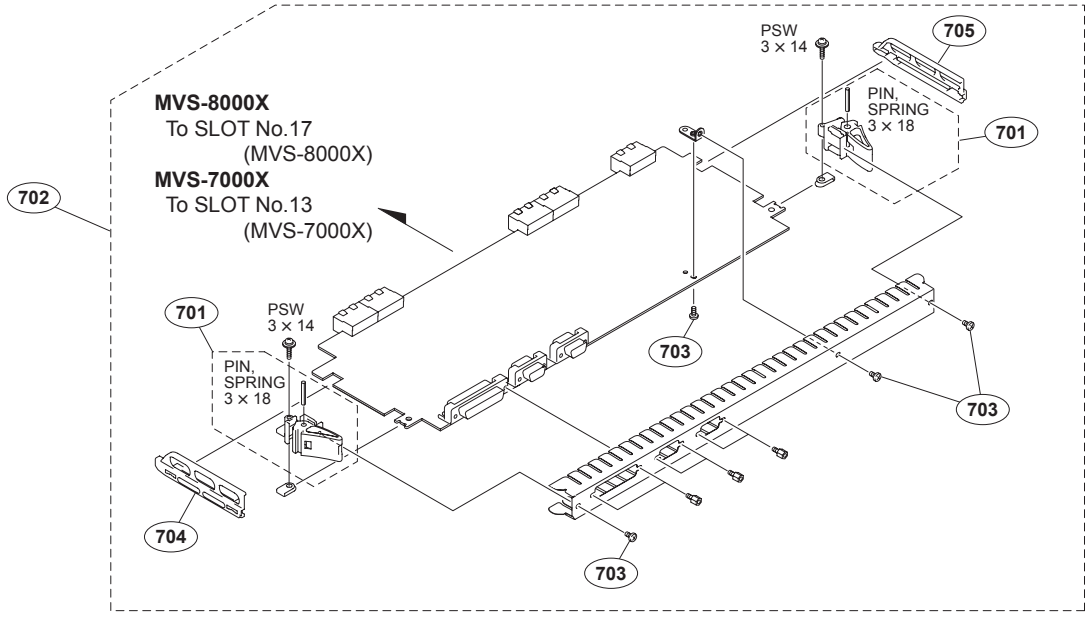

No.	Part No.	SP	Description
701	A-1771-685-A	s	BOARD LEVER R ASSY
702	A-1780-853-A	s	MOUNTED CIRCUIT BOARD, CN-3234
703	3-725-295-21	s	SCREW, (+) (B3)
704	4-183-449-01	s	PC BOARD GUARD RL
705	4-183-450-01	s	PC BOARD GUARD RR
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-951-01	s	SCREW +PSW 3X14

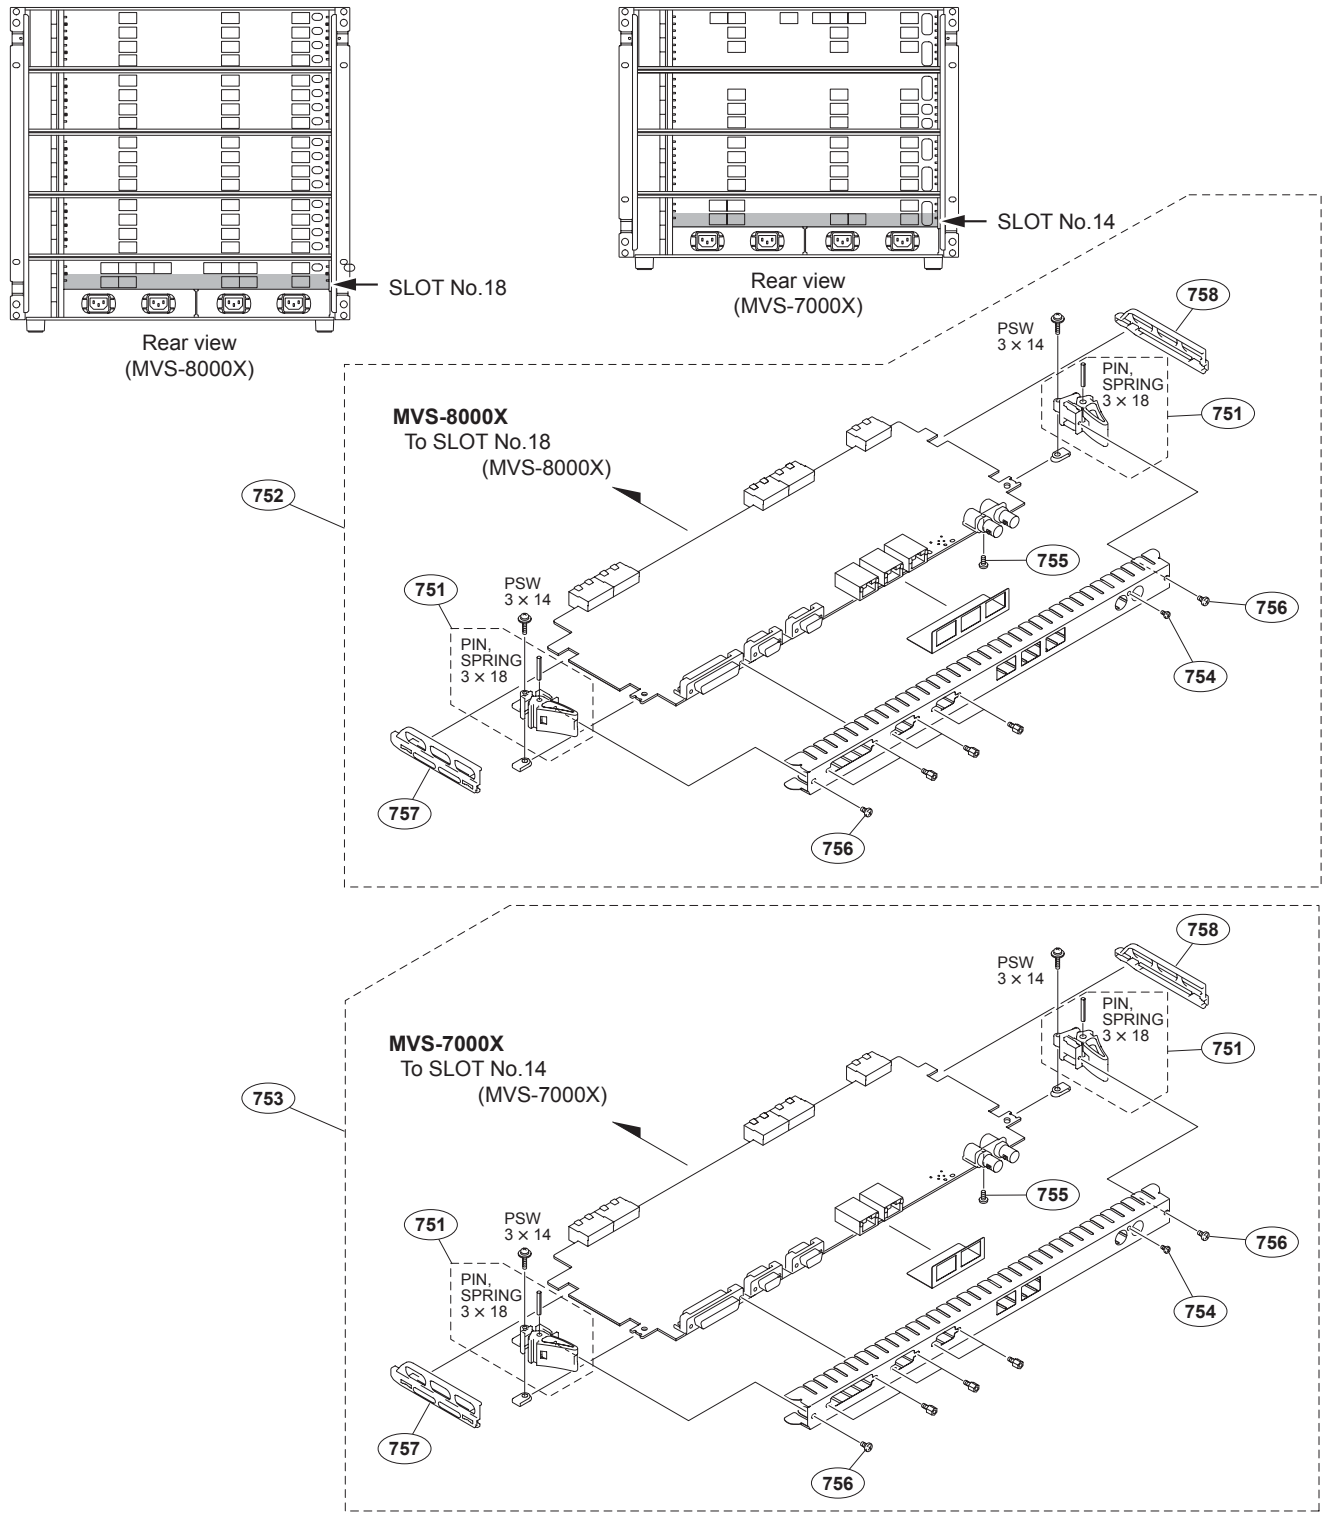

No.	Part No.	SP	Description
751	A-1771-685-A	s	BOARD LEVER R ASSY
752	A-1780-852-A	s	MOUNTED CIRCUIT BOARD, CN-3233
753	A-1830-153-A	s	MOUNTED CIRCUIT BOARD, CN-3233A
754	2-655-586-01	s	SCREW +B M2.6 EG
755	3-637-901-02	s	SCREW M2.6X5
756	3-725-295-21	s	SCREW, (+) (B3)
757	4-183-449-01	s	PC BOARD GUARD RL
758	4-183-450-01	s	PC BOARD GUARD RR
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-951-01	s	SCREW +PSW 3X14

CNI-37/CNI-37A/CNO-38/CNO-38A/CNO-38B Board (MVS-7000X/8000X)

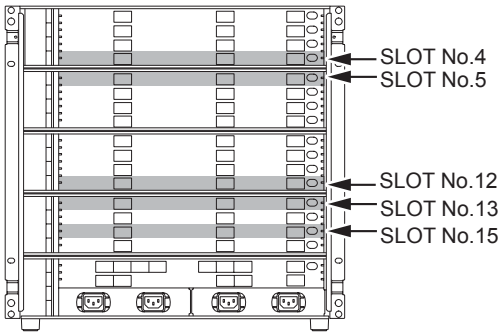

Rear view
(MVS-8000X)

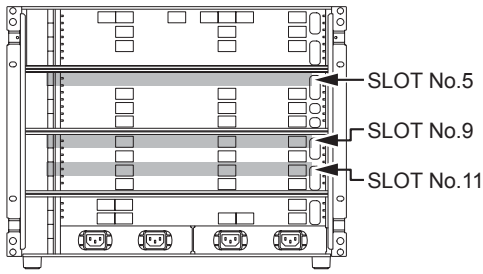

Rear view
(MVS-7000X)

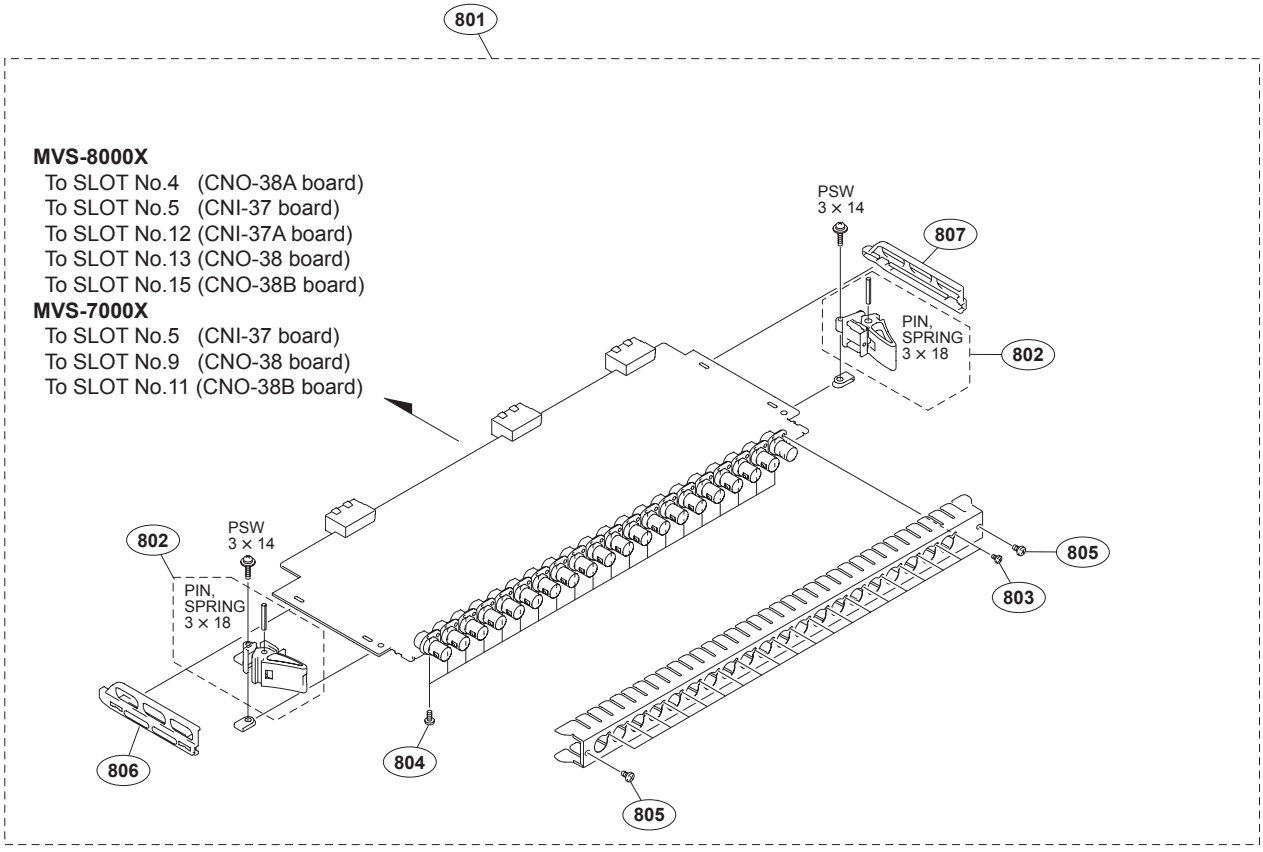

No.	Part No.	SP	Description
801	A-1718-308-A	s	MOUNTED CIRCUIT BOARD, CNO-38
	A-1780-856-A	s	MOUNTED CIRCUIT BOARD, CNI-37A
	A-1780-857-A	s	MOUNTED CIRCUIT BOARD, CNO-38A
	A-1780-858-B	s	MOUNTED CIRCUIT BOARD, CNO-38B
802	A-1771-685-A	s	BOARD LEVER R ASSY
803	2-655-586-01	s	SCREW +B M2.6 EG
804	3-637-901-02	s	SCREW M2.6X5
805	3-725-295-21	s	SCREW, (+) (B3)
806	4-183-449-01	s	PC BOARD GUARD RL
807	4-183-450-01	s	PC BOARD GUARD RR
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-951-01	s	SCREW +PSW 3X14

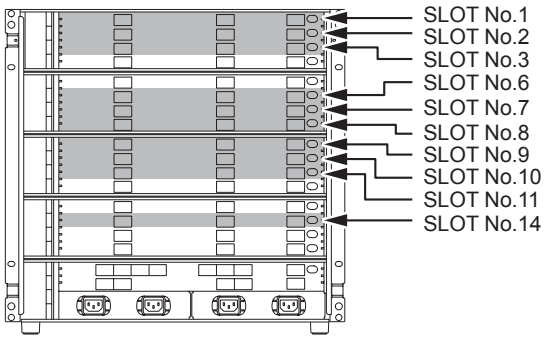

Rear view
(MVS-8000X)

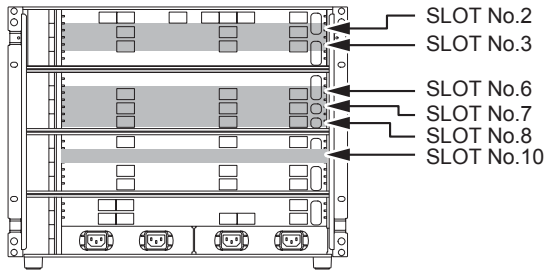

Rear view
(MVS-7000X)

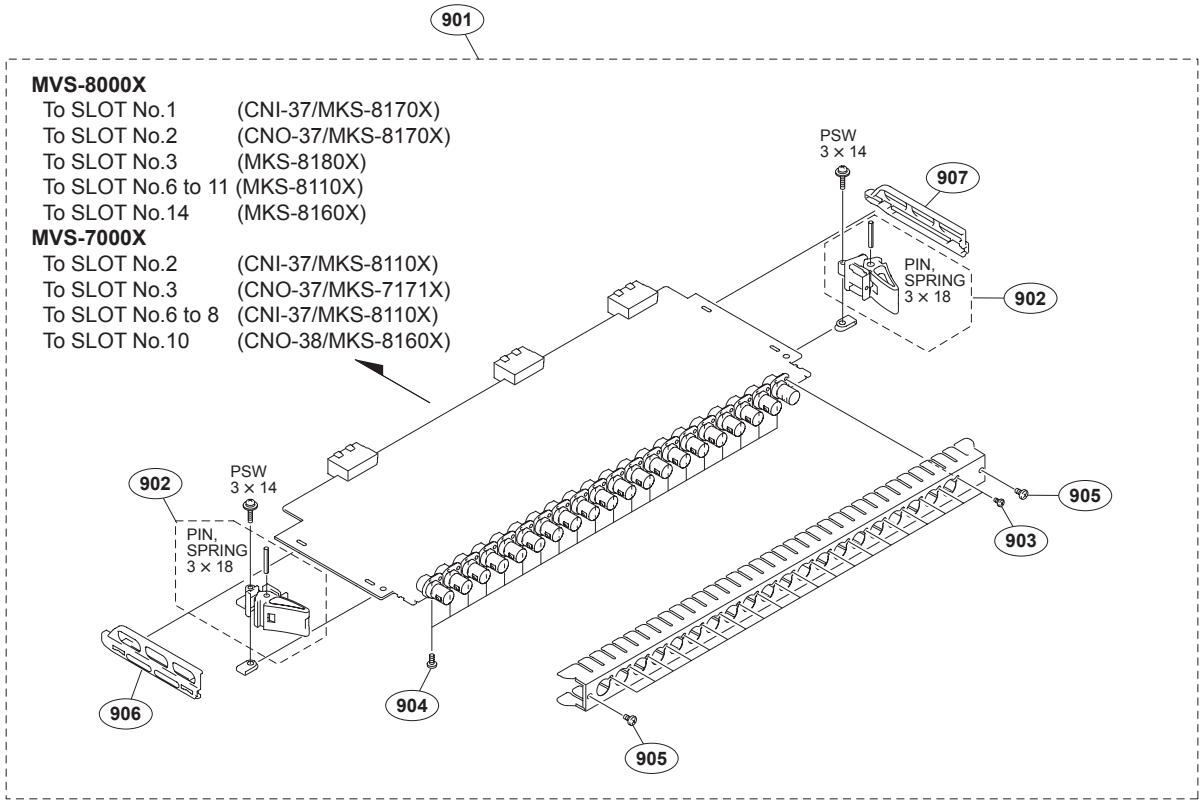

No.	Part No.	SP	Description
901	A-1718-306-A	s	MOUNTED CIRCUIT BOARD, CNO-37 (MKS-8170X)
	A-1718-308-A	s	MOUNTED CIRCUIT BOARD, CNO-38 (MKS-8160X)
902	A-1771-685-A	s	BOARD LEVER R ASSY
903	2-655-586-01	s	SCREW +B M2.6 EG
904	3-637-901-02	s	SCREW M2.6X5
905	3-725-295-21	s	SCREW, (+) (B3)
906	4-183-449-01	s	PC BOARD GUARD RL
907	4-183-450-01	s	PC BOARD GUARD RR
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-951-01	s	SCREW +PSW 3X14

MB-1150 Board (MVS-8000X)

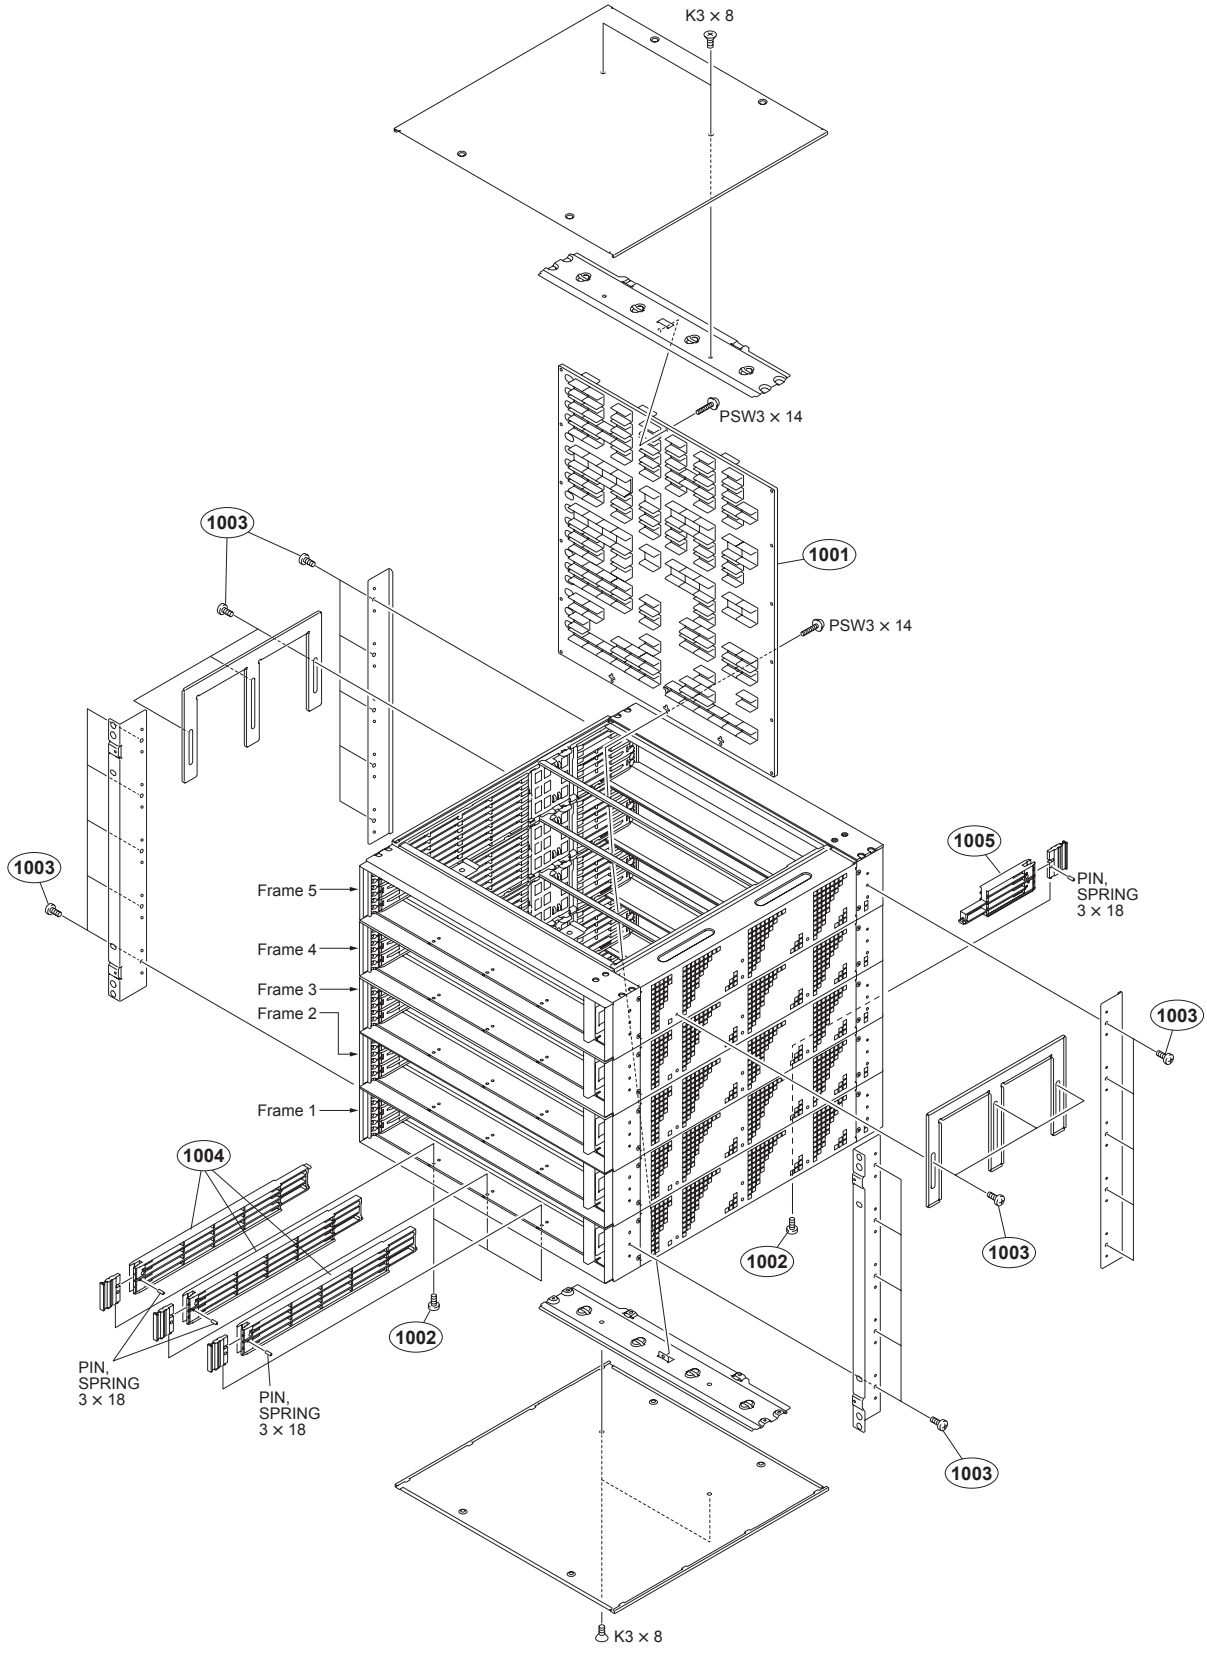

No.	Part No.	SP	Description
1001	A-1707-413-A	s	MOUNTED CIRCUIT BOARD, MB-1150
1002	3-725-295-21	s	SCREW, (+) (B3)
1003	3-733-690-01	s	+B 4X6 (CU,NI)
1004	4-183-690-01	s	GUIDE (FM),PC BOARD
1005	4-183-691-01	s	GUIDE (RM),PC BOARD
	7-626-320-11	s	PIN, SPRING 3X8
	7-682-248-04	s	SCREW +K 3X8
	7-682-951-01	s	SCREW +PSW 3X14

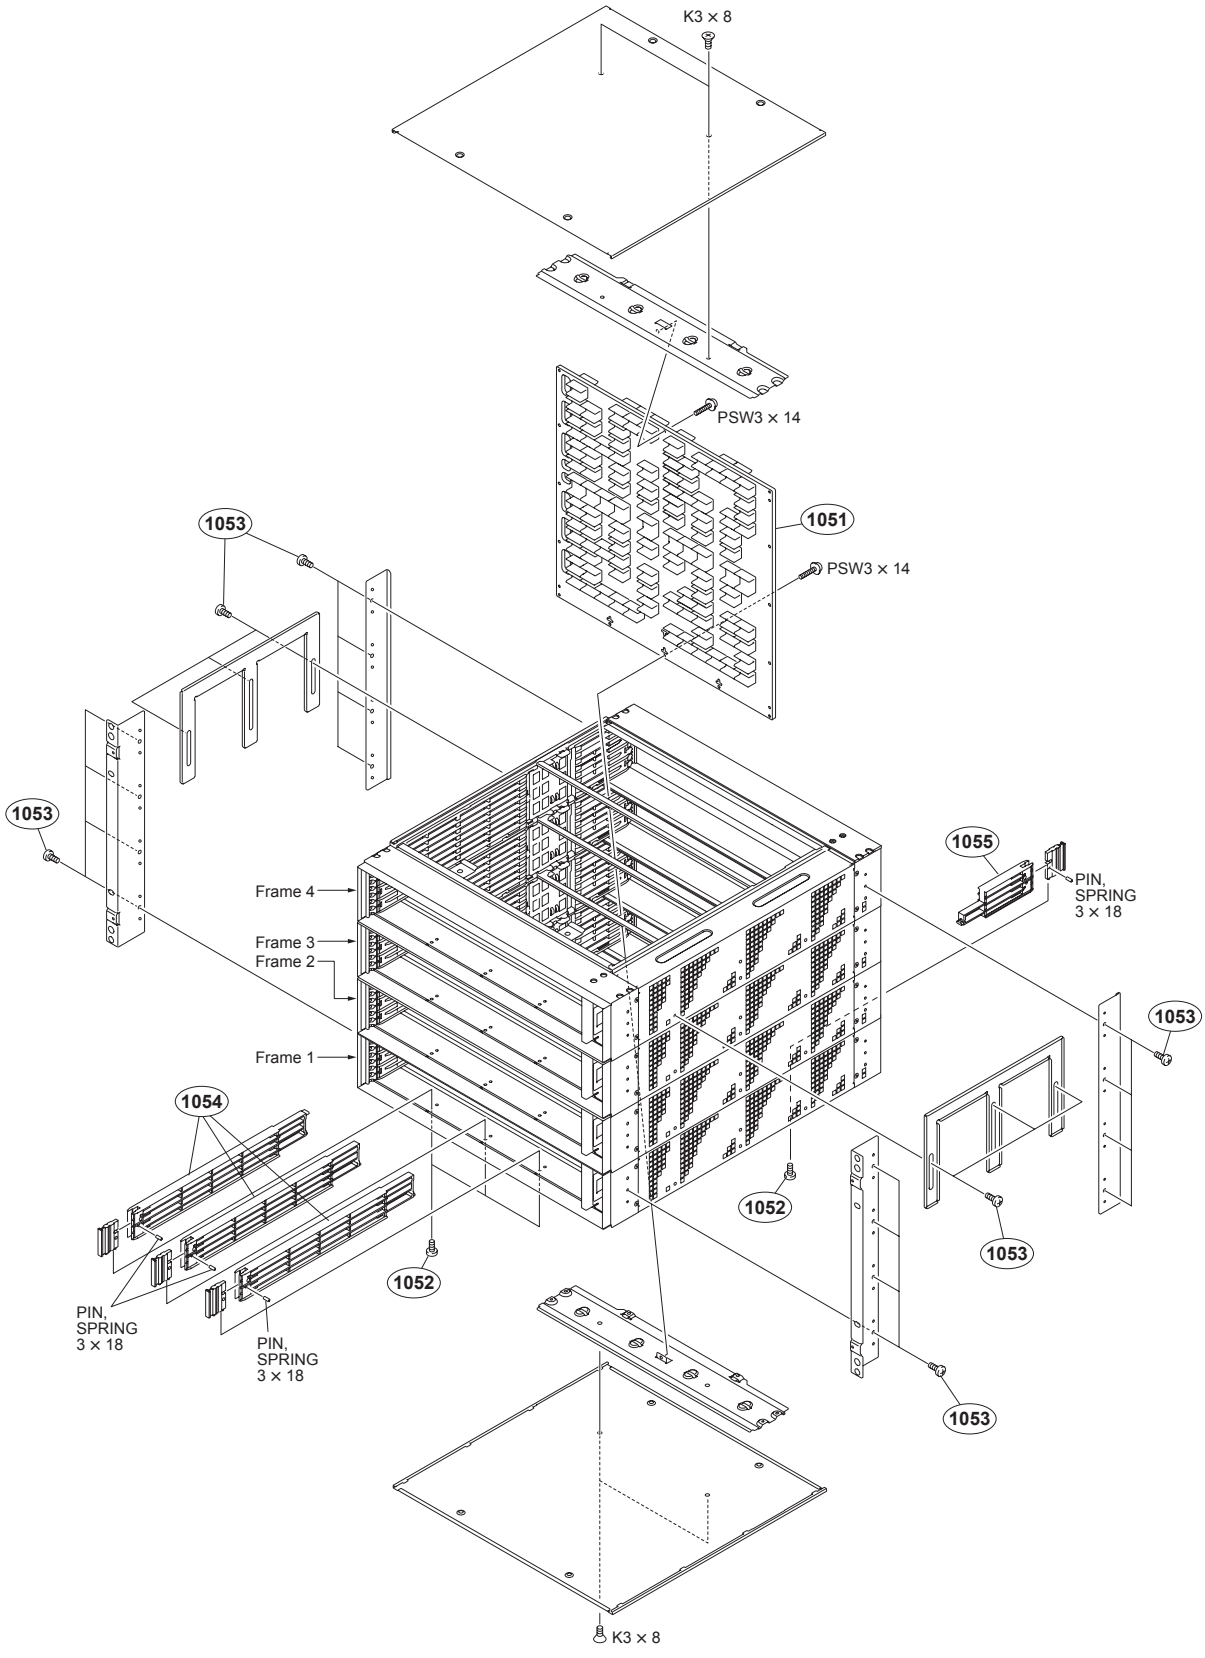

No.	Part No.	SP	Description
1051	A-1797-428-A	s	MOUNTED CIRCUIT BOARD, MB-1151
1052	3-725-295-21	s	SCREW, (+) (B3)
1053	3-733-690-01	s	+B 4X6 (CU,NI)
1054	4-183-690-01	s	GUIDE (FM),PC BOARD
1055	4-183-691-01	s	GUIDE (RM),PC BOARD

No.	Part No.	SP	Description
	7-626-320-11	s	PIN, SPRING 3X8
	7-682-248-04	s	SCREW +K 3X8
	7-682-951-01	s	SCREW +PSW 3X14

Frame Assembly (MVS-8000X/7000X)

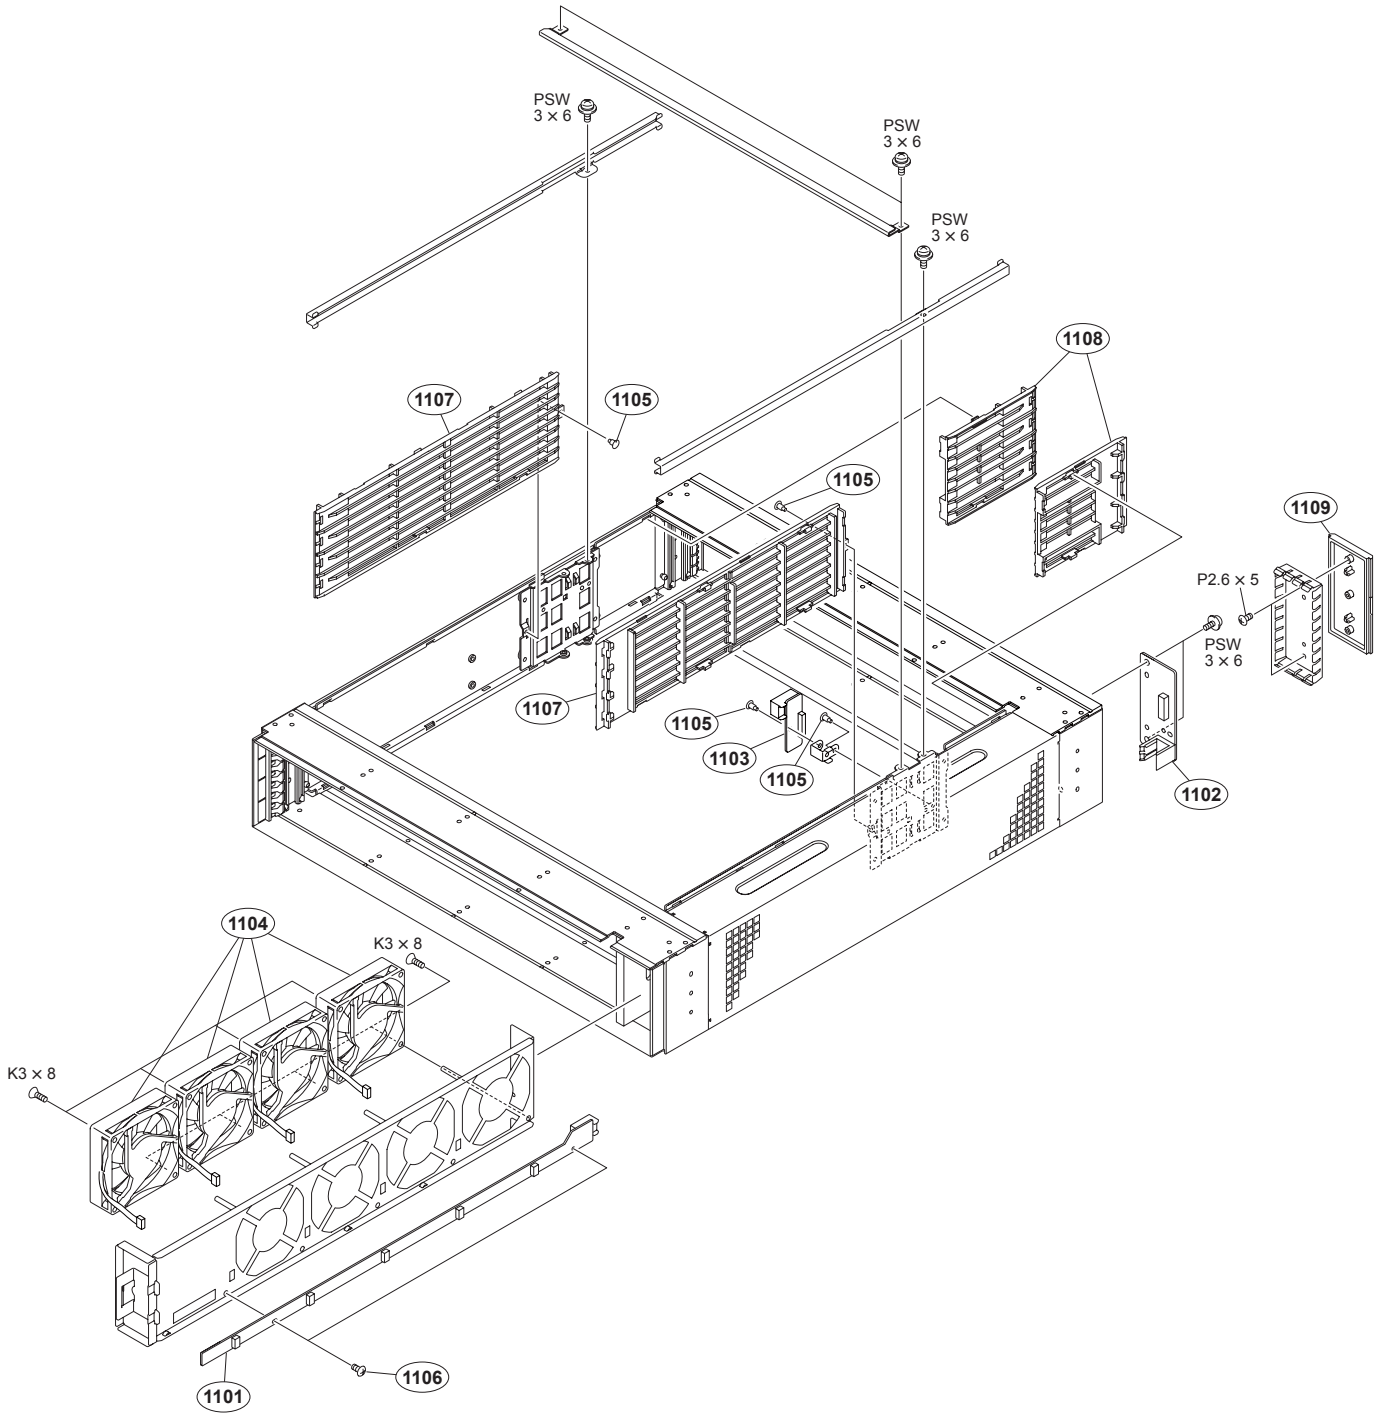

No.	Part No.	SP	Description
1101	A-1730-158-A	s	MOUNTED CIRCUIT BOARD, HN-364
1102	A-1730-159-A	s	MOUNTED CIRCUIT BOARD, HN-365
1103	A-1730-160-A	s	MOUNTED CIRCUIT BOARD, HN-366
1104 ⚠	1-787-908-11	s	FAN, DC (80 SQUARE)
1105	3-531-576-11	s	RIVET
1106	3-725-295-21	s	SCREW, (+) (B3)
1107	4-183-665-01	s	GUIDE (F),PC BOARD
1108	4-183-666-01	s	GUIDE (R),PC BOARD
1109	4-183-700-01	s	PANEL, BLANK

No.	Part No.	SP	Description
	7-682-248-04	s	SCREW +K 3X8
	7-682-947-01	s	SCREW +PSW 3X6
	7-685-132-11	s	SCREW +P 2.6X5 TYPE2 NON-SLIT

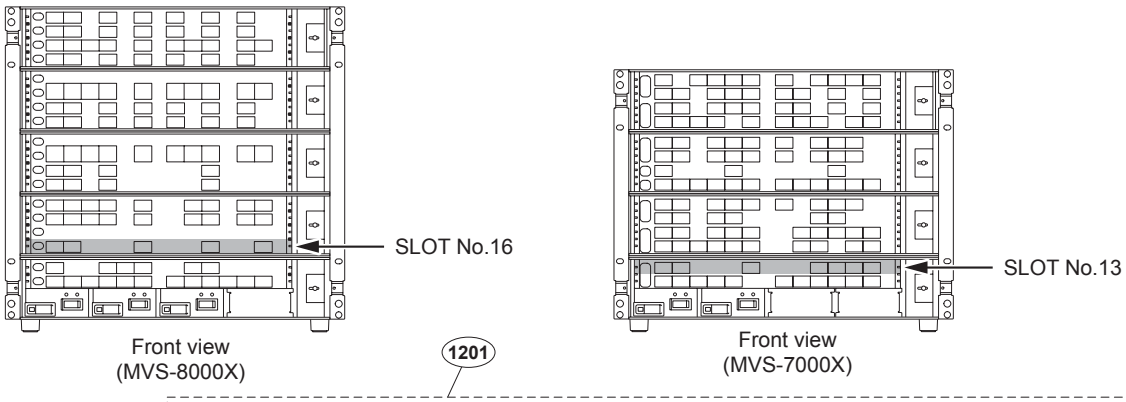

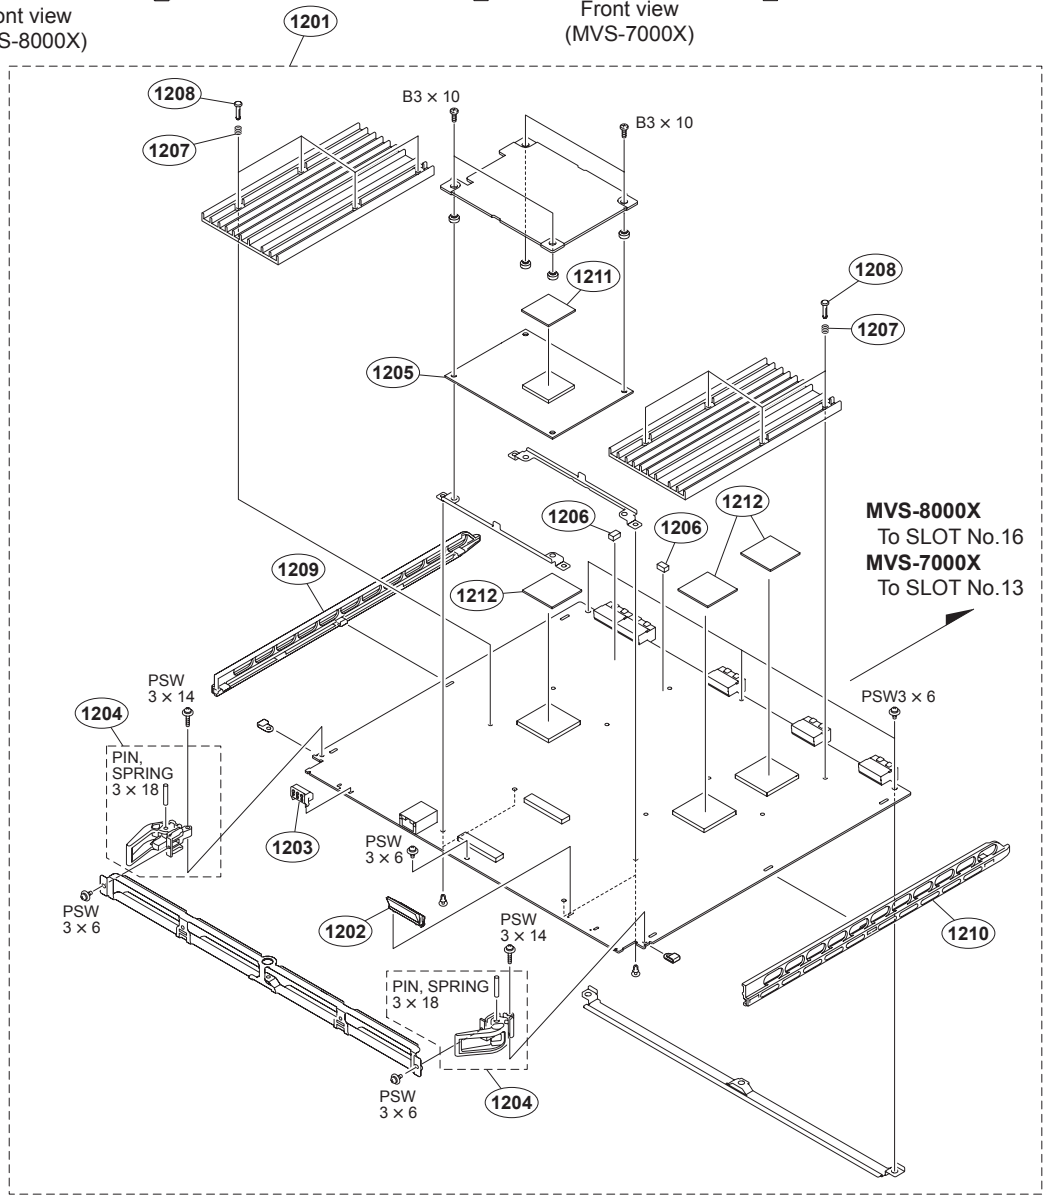

No.	Part No.	SP	Description
1201	A-1718-312-A	s	MOUNTED CIRCUIT BOARD, MY-118
1202	A-1771-682-A	s	ASSY, 7SEG
1203	A-1771-683-A	s	ASSY, PBS
1204	A-1771-684-A	s	BOARD LEVER F ASSY
1205	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
1206	3-561-426-01	s	CUSHION
1207	4-143-557-01	s	SPRING, COMPRESSION
1208	4-143-559-01	s	PIN, PUSH
1209	4-183-378-01	s	PC BOARD GUARD FL
1210	4-183-379-01	s	PC BOARD GUARD FR

No.	Part No.	SP	Description
1211	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1212	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-549-09	s	SCREW +B 3X10
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

FC-112 Board (MKS-8450X)

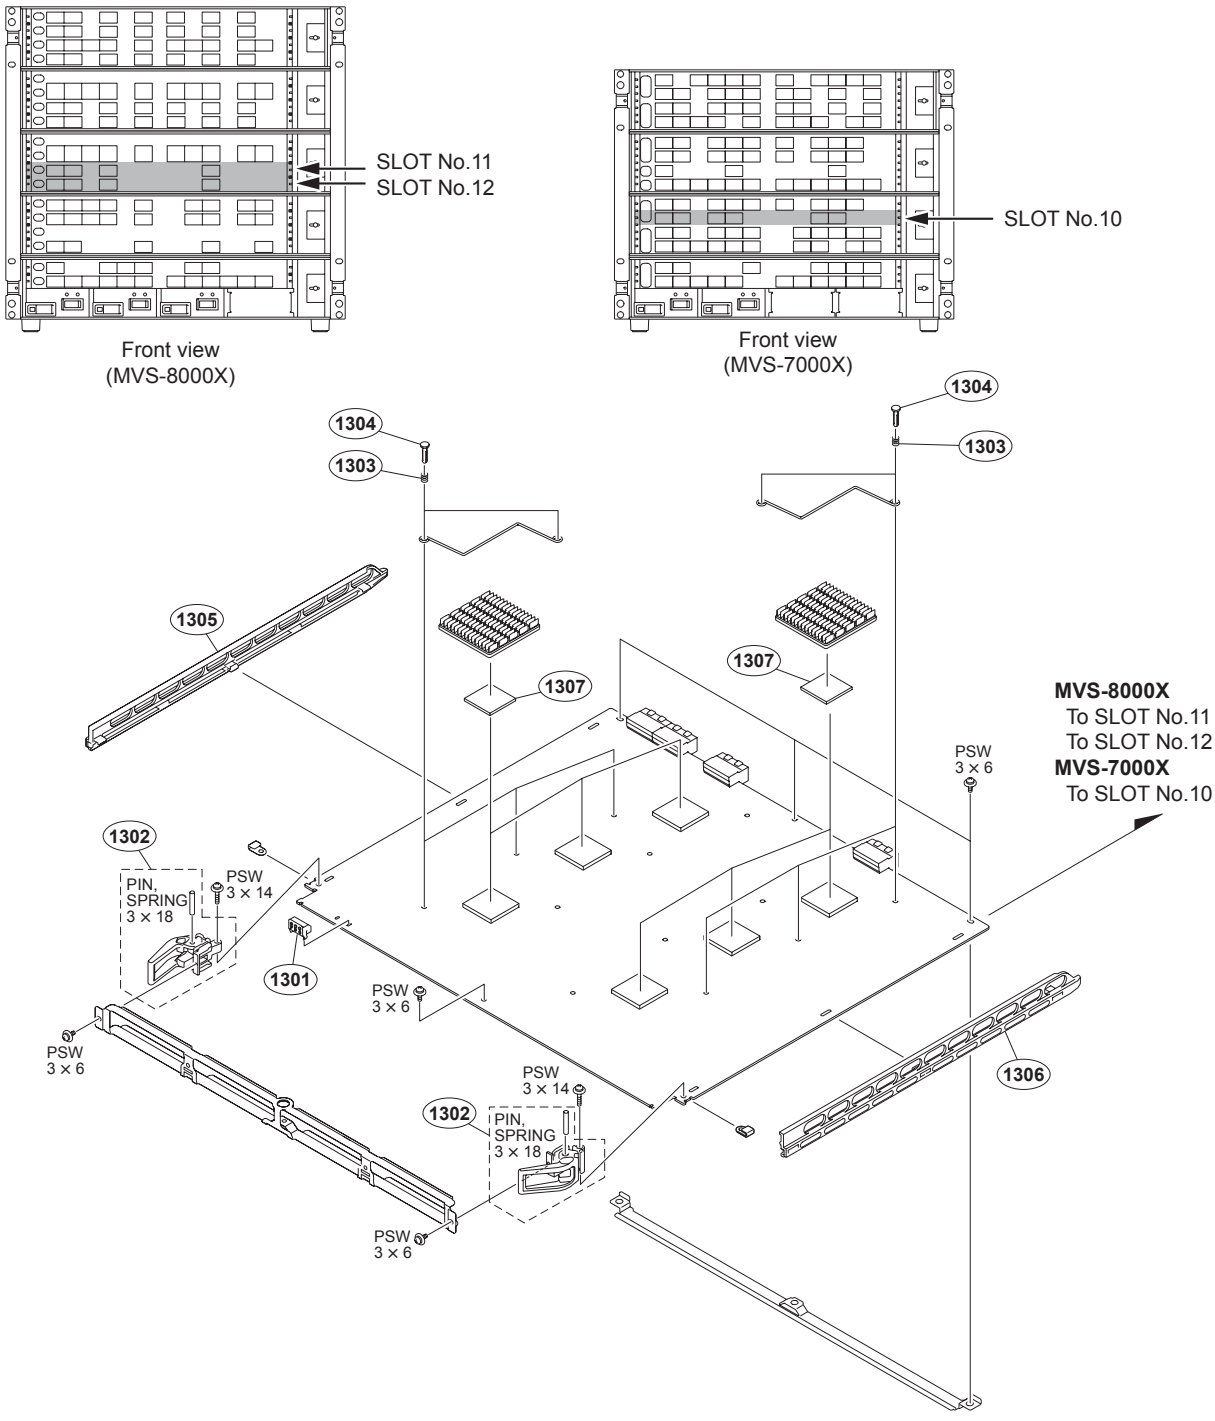

No.	Part No.	SP	Description
1301	A-1771-683-A	s	ASSY, PBS
1302	A-1771-684-A	s	BOARD LEVER F ASSY
1303	4-143-557-01	s	SPRING, COMPRESSION
1304	4-143-559-01	s	PIN, PUSH
1305	4-183-378-01	s	PC BOARD GUARD FL
1306	4-183-379-01	s	PC BOARD GUARD FR
1307	4-187-619-01	s	SHEET,RADIATION(25X25X2)
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

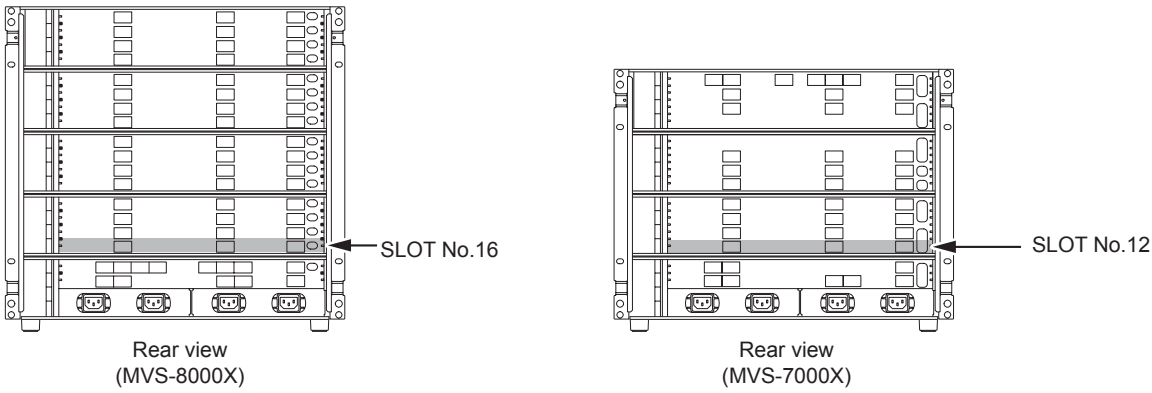

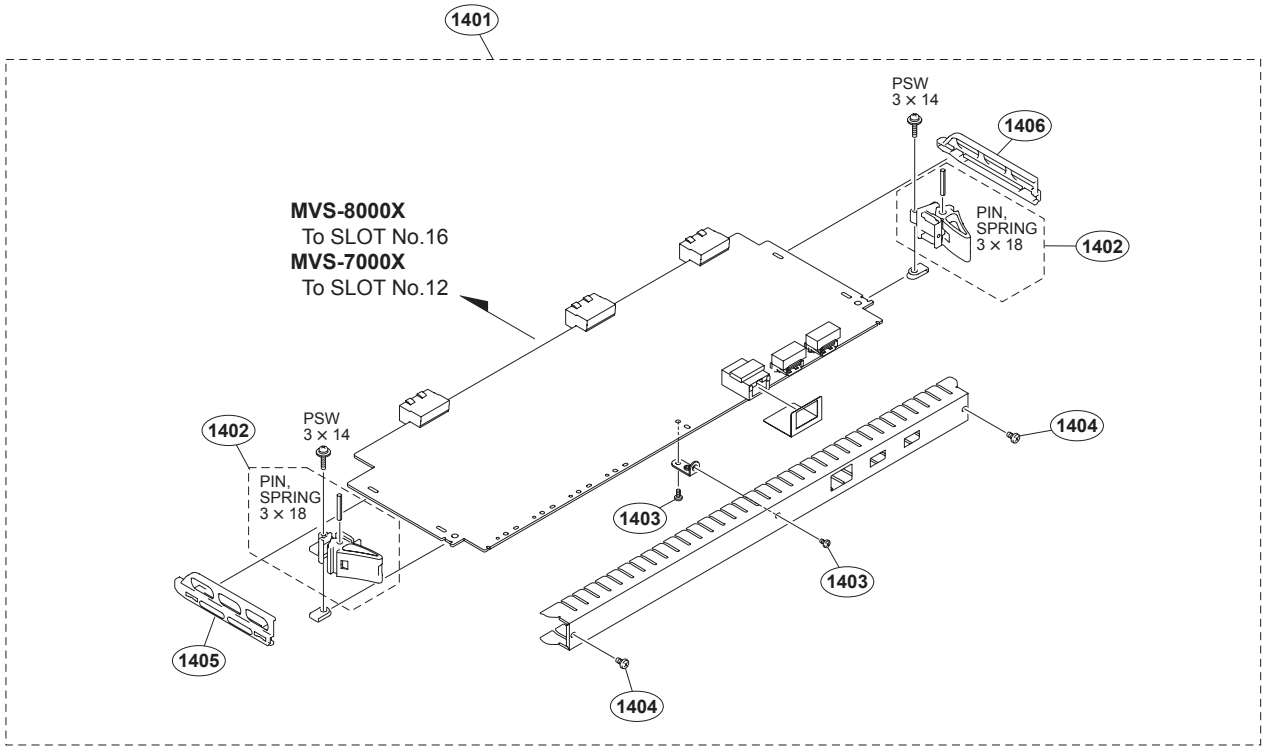

No.	Part No.	SP	Description
1401	A-1718-313-A	s	MOUNTED CIRCUIT BOARD, CN-3235
1402	A-1771-685-A	s	BOARD LEVER R ASSY
1403	2-655-586-01	s	SCREW +B M2.6 EG
1404	3-725-295-21	s	SCREW, (+) (B3)
1405	4-183-449-01	s	PC BOARD GUARD RL
1406	4-183-450-01	s	PC BOARD GUARD RR
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-951-01	s	SCREW +PSW 3X14

DVP-53 Board (MKS-7470X/MKS-7471X)

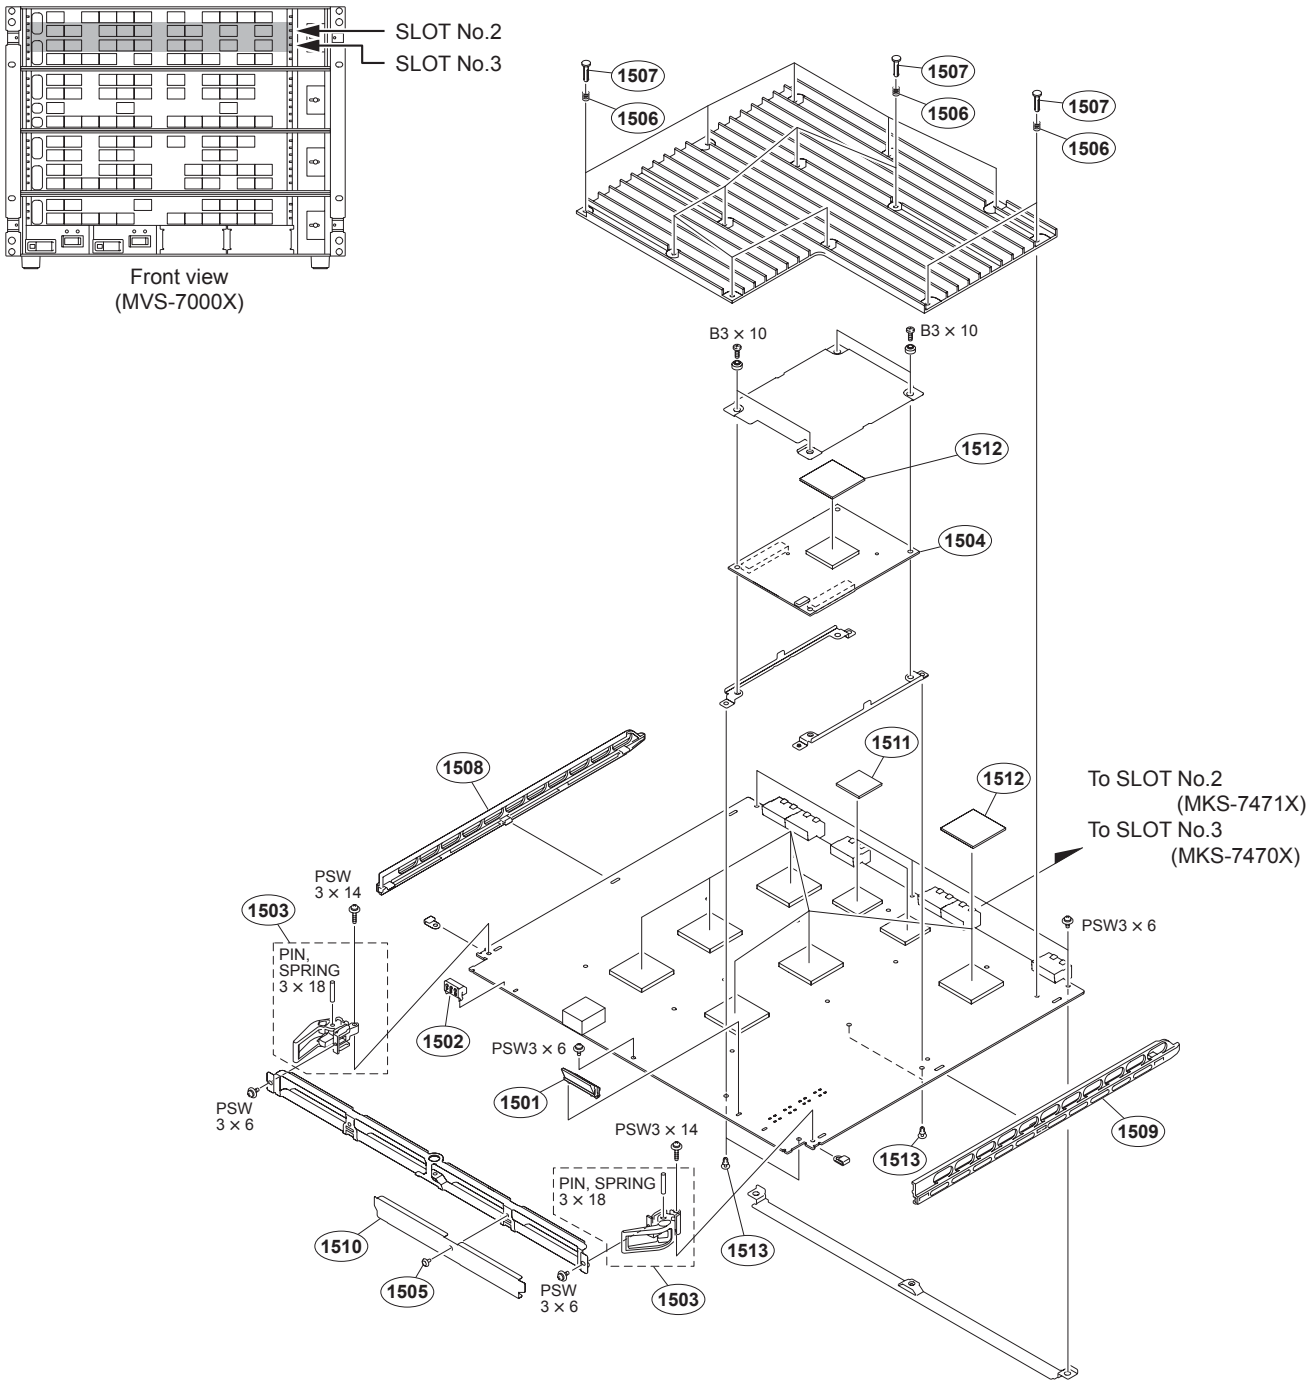

No.	Part No.	SP	Description
1501	A-1771-682-A	s	ASSY, 7SEG
1502	A-1771-683-A	s	ASSY, PBS
1503	A-1771-684-A	s	BOARD LEVER F ASSY
1504	1-857-571-12	s	PC BOARD, MOUNT (CPU-DP MODULE)
1505	3-531-576-51	o	RIVET
1506	4-143-557-01	s	SPRING, COMPRESSION
1507	4-143-559-01	s	PIN, PUSH
1508	4-183-378-01	s	PC BOARD GUARD FL
1509	4-183-379-01	s	PC BOARD GUARD FR
1510	4-183-612-01	s	SHEET, WIND SHIELDING
1511	4-187-619-01	s	SHEET, RADIATION (25X25X2)
1512	4-187-620-01	s	SHEET, RADIATION (33X33X1.5)
1513	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
	7-626-320-61	s	PIN, SPRING 3X18
	7-682-549-09	s	SCREW +B 3X10
	7-682-947-01	s	SCREW +PSW 3X6
	7-682-951-01	s	SCREW +PSW 3X14

2-3. Electrical Parts List

CA-82 BOARD (SUFFIX 13)

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	4-143-557-01	s	SPRING, COMPRESSION
2pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
1pc	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
0.75pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
1pc	7-626-320-61	s	PIN, SPRING 3X18
10pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1.23pcs	9-910-999-SI	s	SOLDER (F3M705,D0.8) 1.0KG
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-137-894-21	s	CAP, CHIP ELECT 470MF
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C204	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C205	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C206	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C207	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C208	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C239	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C241	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C242	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C243	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C244	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C245	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C246	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C247	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C248	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C301	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C304	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C305	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C306	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C307	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C308	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C315	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C316	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C317	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C318	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C319	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C320	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C323	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C324	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C325	1-116-118-11	s	CAP, ELECT 47MF 105
C326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C327	1-116-118-11	s	CAP, ELECT 47MF 105
C401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C501	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C503	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C632	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C634	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C636	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C640	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C646	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C728	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C926	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C928	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C930	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C932	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C933	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C934	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1004	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1005	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1042	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1043	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1101	1-116-118-11	s	CAP, ELECT 47MF 105
C1102	1-116-118-11	s	CAP, ELECT 47MF 105
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1222	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1224	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1225	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1301	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C1302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1303	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C1304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1305	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C1306	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1343	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1372	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1373	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1384	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1385	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1386	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1388	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1390	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1391	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1392	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1393	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1394	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1395	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1396	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1397	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1399	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1523	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1803	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1903	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2402	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2405	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2408	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2418	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2423	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2428	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2447	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2456	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2465	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2466	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2467	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2468	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2469	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2470	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2471	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2472	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2474	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2476	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2478	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2480	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2502	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2505	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2508	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2511	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2523	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2528	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2556	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2567	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2569	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2570	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2571	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2572	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2573	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2574	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2577	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2578	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2579	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2580	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2581	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2582	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2583	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2584	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2601	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2610	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2704	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2706	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2728	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2742	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2743	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2747	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2748	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2752	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2757	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2760	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2801	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2807	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2817	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2822	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2823	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2828	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2829	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2830	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2831	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2835	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2840	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C2901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2907	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2918	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2920	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2922	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2924	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2926	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2927	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2928	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2932	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2937	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2946	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2947	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2957	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2963	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3114	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3115	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3116	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3117	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3118	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3119	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3120	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3121	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3122	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3123	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3124	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3149	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3150	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3151	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3176	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3178	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3179	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3181	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3183	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3184	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3185	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3186	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3187	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3188	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3190	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3191	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3192	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3193	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3194	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3195	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3196	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3197	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3198	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3199	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3213	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3214	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3304	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3528	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3623	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3624	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3625	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3626	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3628	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3632	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3635	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3636	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C3637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3639	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3646	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3647	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3648	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3649	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3650	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3653	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3701	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3714	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3918	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3928	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3930	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3932	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4101	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4104	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4107	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4110	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4117	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4122	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C4123	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C4124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4129	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4130	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4131	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4137	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1101	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN1102	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
CN2201	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2202	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2203	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2301	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2302	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2303	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN3701	1-815-893-11	s	CONNECTOR, CARD (CFA) 50P
CN3801	1-770-627-21	s	PIN, CONNECTOR 10P
CN3901	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN3902	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN4101	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D201	6-502-197-01	s	DI SML-D12M8WT86SM
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D204	6-502-197-01	s	DI SML-D12M8WT86SM
D205	6-502-197-01	s	DI SML-D12M8WT86SM
D206	6-502-197-01	s	DI SML-D12M8WT86SM
D301	8-719-069-28	s	DI 1SS400FJTE61
D302	8-719-069-28	s	DI 1SS400FJTE61
D303	8-719-069-28	s	DI 1SS400FJTE61
D304	8-719-069-28	s	DI 1SS400FJTE61
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D308	6-502-197-01	s	DI SML-D12M8WT86SM
D309	8-719-069-28	s	DI 1SS400FJTE61
D310	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-598-01	s	DI SML-D12U8WT86
D802	6-502-197-01	s	DI SML-D12M8WT86SM
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM
D805	6-502-197-01	s	DI SML-D12M8WT86SM
D901	6-502-197-01	s	DI SML-D12M8WT86SM
D902	6-502-197-01	s	DI SML-D12M8WT86SM
D903	6-502-197-01	s	DI SML-D12M8WT86SM
D904	6-502-197-01	s	DI SML-D12M8WT86SM
D905	6-502-197-01	s	DI SML-D12M8WT86SM
D906	6-502-197-01	s	DI SML-D12M8WT86SM
D907	6-502-197-01	s	DI SML-D12M8WT86SM
D908	6-502-197-01	s	DI SML-D12M8WT86SM
D909	6-502-197-01	s	DI SML-D12M8WT86SM
D910	6-502-197-01	s	DI SML-D12M8WT86SM
D911	6-502-197-01	s	DI SML-D12M8WT86SM
D912	6-502-197-01	s	DI SML-D12M8WT86SM
D913	6-502-197-01	s	DI SML-D12M8WT86SM
D914	6-502-197-01	s	DI SML-D12M8WT86SM
D915	6-502-197-01	s	DI SML-D12M8WT86SM
D916	6-502-197-01	s	DI SML-D12M8WT86SM
D917	6-502-197-01	s	DI SML-D12M8WT86SM
D918	6-502-197-01	s	DI SML-D12M8WT86SM
D919	6-502-197-01	s	DI SML-D12M8WT86SM
D920	6-502-197-01	s	DI SML-D12M8WT86SM
D1002	8-719-056-65	s	DIODE 1SS372-TE85L
D1101	6-502-197-01	s	DI SML-D12M8WT86SM
D1102	6-502-197-01	s	DI SML-D12M8WT86SM

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
D1201	6-502-598-01	s	DI SML-D12U8WT86
D1301	6-502-197-01	s	DI SML-D12M8WT86SM
D1302	6-502-197-01	s	DI SML-D12M8WT86SM
D1303	6-502-197-01	s	DI SML-D12M8WT86SM
D1304	6-502-197-01	s	DI SML-D12M8WT86SM
D1305	6-502-197-01	s	DI SML-D12M8WT86SM
D1306	6-502-197-01	s	DI SML-D12M8WT86SM
D1307	6-502-197-01	s	DI SML-D12M8WT86SM
D1308	6-502-197-01	s	DI SML-D12M8WT86SM
D2201	6-502-197-01	s	DI SML-D12M8WT86SM
D2202	6-502-197-01	s	DI SML-D12M8WT86SM
D2203	6-502-197-01	s	DI SML-D12M8WT86SM
D2204	6-502-197-01	s	DI SML-D12M8WT86SM
D2301	6-502-197-01	s	DI SML-D12M8WT86SM
D2302	6-502-197-01	s	DI SML-D12M8WT86SM
D2303	6-502-197-01	s	DI SML-D12M8WT86SM
D2304	6-502-197-01	s	DI SML-D12M8WT86SM
D2401	6-502-197-01	s	DI SML-D12M8WT86SM
D2402	6-502-197-01	s	DI SML-D12M8WT86SM
D2403	6-502-197-01	s	DI SML-D12M8WT86SM
D2404	6-502-197-01	s	DI SML-D12M8WT86SM
D2405	6-502-197-01	s	DI SML-D12M8WT86SM
D2406	6-502-197-01	s	DI SML-D12M8WT86SM
D2501	6-502-197-01	s	DI SML-D12M8WT86SM
D2502	6-502-197-01	s	DI SML-D12M8WT86SM
D2503	6-502-197-01	s	DI SML-D12M8WT86SM
D2504	6-502-197-01	s	DI SML-D12M8WT86SM
D2505	6-502-197-01	s	DI SML-D12M8WT86SM
D2506	6-502-197-01	s	DI SML-D12M8WT86SM
D2701	6-502-197-01	s	DI SML-D12M8WT86SM
D2702	6-502-197-01	s	DI SML-D12M8WT86SM
D2703	6-502-197-01	s	DI SML-D12M8WT86SM
D2704	6-502-197-01	s	DI SML-D12M8WT86SM
D2705	6-502-197-01	s	DI SML-D12M8WT86SM
D2706	6-502-197-01	s	DI SML-D12M8WT86SM
D2707	6-502-197-01	s	DI SML-D12M8WT86SM
D2708	6-502-197-01	s	DI SML-D12M8WT86SM
D2709	6-502-197-01	s	DI SML-D12M8WT86SM
D2801	6-502-197-01	s	DI SML-D12M8WT86SM
D2802	6-502-197-01	s	DI SML-D12M8WT86SM
D2803	6-502-197-01	s	DI SML-D12M8WT86SM
D2901	6-502-197-01	s	DI SML-D12M8WT86SM
D2902	6-502-197-01	s	DI SML-D12M8WT86SM
D2903	6-502-197-01	s	DI SML-D12M8WT86SM
D2904	6-502-197-01	s	DI SML-D12M8WT86SM
D2905	6-502-197-01	s	DI SML-D12M8WT86SM
D2906	6-502-197-01	s	DI SML-D12M8WT86SM
D2907	6-502-197-01	s	DI SML-D12M8WT86SM
D2908	6-502-197-01	s	DI SML-D12M8WT86SM
D2909	6-502-197-01	s	DI SML-D12M8WT86SM
D3234	8-719-989-01	s	DIODE DA221-TL
D3235	8-719-989-01	s	DIODE DA221-TL
D3236	8-719-989-01	s	DIODE DA221-TL
D3237	8-719-989-01	s	DIODE DA221-TL
D3238	8-719-989-01	s	DIODE DA221-TL
D3239	8-719-989-01	s	DIODE DA221-TL
D3240	8-719-989-01	s	DIODE DA221-TL
D3241	8-719-989-01	s	DIODE DA221-TL
D3242	8-719-989-01	s	DIODE DA221-TL

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
D3243	8-719-989-01	s	DIODE DA221-TL
D3244	8-719-989-01	s	DIODE DA221-TL
D3245	8-719-989-01	s	DIODE DA221-TL
D3246	8-719-989-01	s	DIODE DA221-TL
D3247	8-719-989-01	s	DIODE DA221-TL
D3248	8-719-989-01	s	DIODE DA221-TL
D3249	8-719-989-01	s	DIODE DA221-TL
D3501	8-719-989-01	s	DIODE DA221-TL
D3502	8-719-989-01	s	DIODE DA221-TL
D3503	8-719-989-01	s	DIODE DA221-TL
D3504	8-719-989-01	s	DIODE DA221-TL
D3505	8-719-989-01	s	DIODE DA221-TL
D3506	8-719-989-01	s	DIODE DA221-TL
D3507	8-719-989-01	s	DIODE DA221-TL
D3508	8-719-989-01	s	DIODE DA221-TL
D3509	8-719-989-01	s	DIODE DA221-TL
D3510	8-719-989-01	s	DIODE DA221-TL
D3511	8-719-989-01	s	DIODE DA221-TL
D3512	8-719-989-01	s	DIODE DA221-TL
D3513	8-719-989-01	s	DIODE DA221-TL
D3514	8-719-989-01	s	DIODE DA221-TL
D3515	8-719-989-01	s	DIODE DA221-TL
D3516	8-719-989-01	s	DIODE DA221-TL
D3517	8-719-989-01	s	DIODE DA221-TL
D3518	8-719-989-01	s	DIODE DA221-TL
D3519	8-719-989-01	s	DIODE DA221-TL
D3520	8-719-989-01	s	DIODE DA221-TL
D3521	8-719-989-01	s	DIODE DA221-TL
D3522	8-719-989-01	s	DIODE DA221-TL
D3523	8-719-989-01	s	DIODE DA221-TL
D3524	8-719-989-01	s	DIODE DA221-TL
D3525	8-719-989-01	s	DIODE DA221-TL
D3526	8-719-989-01	s	DIODE DA221-TL
D3527	8-719-989-01	s	DIODE DA221-TL
D3528	8-719-989-01	s	DIODE DA221-TL
D3529	8-719-989-01	s	DIODE DA221-TL
D3530	8-719-989-01	s	DIODE DA221-TL
D3601	6-502-197-01	s	DI SML-D12M8WT86SM
D3602	6-502-197-01	s	DI SML-D12M8WT86SM
D3603	6-502-197-01	s	DI SML-D12M8WT86SM
D3604	6-502-197-01	s	DI SML-D12M8WT86SM
D3605	6-502-352-01	s	DI SML-522MU8WT86PQ
D3606	6-501-436-01	s	DIODE SML412BC6TT86
D3607	6-502-352-01	s	DI SML-522MU8WT86PQ
D3701	6-502-197-01	s	DI SML-D12M8WT86SM
D3702	6-502-197-01	s	DI SML-D12M8WT86SM
D3703	6-502-197-01	s	DI SML-D12M8WT86SM
D3704	6-502-197-01	s	DI SML-D12M8WT86SM
D4101	6-502-197-01	s	DI SML-D12M8WT86SM
D4102	6-502-197-01	s	DI SML-D12M8WT86SM
D4103	6-502-197-01	s	DI SML-D12M8WT86SM
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
E19	1-535-877-22	s	CHIP, CHECKER
E20	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
E22	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2505	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2803	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2804	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2805	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4103	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4104	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4105	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	8-759-437-39	s	IC MB3771PF-ER
IC202	8-759-338-95	s	IC NJM2903V(TE2)
IC203	8-759-338-95	s	IC NJM2903V(TE2)
IC204	8-759-338-95	s	IC NJM2903V(TE2)
IC305	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC306	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC401	6-708-324-01	s	IC R3112N301A-TR-FA
IC402	6-708-324-01	s	IC R3112N301A-TR-FA

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
IC410	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC411	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC412	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC413	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC501	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC502	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC601	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC602	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC603	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC604	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC605	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC606	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC701	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC702	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC703	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC704	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC705	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC706	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC707	6-712-872-01	s	IC SN65LVDS31PWR
IC801	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC802	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC901	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC904	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC905	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC906	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC907	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC908	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1002	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1003	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1102	6-712-872-01	s	IC SN65LVDS31PWR
IC1103	6-712-872-01	s	IC SN65LVDS31PWR
IC1104	6-712-872-01	s	IC SN65LVDS31PWR
IC1105	6-712-872-01	s	IC SN65LVDS31PWR
IC1106	6-712-872-01	s	IC SN65LVDS31PWR
IC1107	6-712-872-01	s	IC SN65LVDS31PWR
IC1108	6-712-872-01	s	IC SN65LVDS31PWR
IC1109	6-712-872-01	s	IC SN65LVDS31PWR
IC1110	6-712-872-01	s	IC SN65LVDS31PWR
IC1111	6-712-872-01	s	IC SN65LVDS31PWR
IC1112	6-712-872-01	s	IC SN65LVDS31PWR
IC1113	6-712-872-01	s	IC SN65LVDS31PWR
IC1114	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC1501	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC1502	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC1503	8-759-388-62	s	IC NJU7062M(TE2)
IC2202	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2203	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2204	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2205	6-705-514-01	s	IC MAX3222IPWR
IC2206	6-705-514-01	s	IC MAX3222IPWR
IC2302	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2303	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2304	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2305	6-705-514-01	s	IC MAX3222IPWR
IC2306	6-705-514-01	s	IC MAX3222IPWR
IC2402	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC2403	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC2404	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2405	8-759-592-47	s	IC TC7SZ08FU(TE85R)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
IC2502	8-759-598-44	s	IC TC7WH08FK(TE85R)
IC2503	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC2504	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2505	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2701	6-714-188-01	s	IC 88E6131-B2-LAR1C000
IC2901	6-714-188-01	s	IC 88E6131-B2-LAR1C000
IC3232	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3233	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3234	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3235	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3301	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC3302	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC3401	8-759-644-10	s	IC MAX3491CSD+TG068
IC3402	8-759-644-10	s	IC MAX3491CSD+TG068
IC3403	8-759-644-10	s	IC MAX3491CSD+TG068
IC3404	8-759-644-10	s	IC MAX3491CSD+TG068
IC3409	6-707-858-01	s	IC TC74VHC00FT(EKJ)
IC3410	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC3502	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3503	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3504	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3505	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3506	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3507	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3601	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC3603	8-759-437-39	s	IC MB3771PF-ER
IC3801	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3802	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3803	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3903	6-710-018-01	s	IC CAT24C02WI-GT3
IC3904	6-714-192-01	s	IC ADT75BRMZ-REEL
IC3907	6-705-514-01	s	IC MAX3222IPWR
IC4104	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC4105	8-759-598-44	s	IC TC7WH08FK(TE85R)
L301	1-416-511-21	s	COIL, CHOKE 47.0UH
L1201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
PS301 ⚠	1-576-677-21	s	LINK, IC (4A/72V)
PS3901 ⚠	1-576-124-21	s	LINK, IC (1A/72V)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q213	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q214	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
Q801	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q1001	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1002	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1201	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q3501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3505	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3605	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3606	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3607	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3608	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3609	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3610	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3611	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3612	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3613	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3614	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3615	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3616	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-935-81	s	RES, CHIP 100K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-903-81	s	RES, CHIP 4.7K (1005)
R209	1-208-895-81	s	RES, CHIP 2.2K (1005)
R210	1-208-887-81	s	RES, CHIP 1.0K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-935-81	s	RES, CHIP 100K (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R219	1-208-715-11	s	RES, CHIP 22K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-895-81	s	RES, CHIP 2.2K (1005)
R225	1-208-715-11	s	RES, CHIP 22K (1005)
R226	1-208-911-81	s	RES, CHIP 10K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-715-11	s	RES, CHIP 22K (1005)
R230	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-208-911-81	s	RES, CHIP 10K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R233	1-208-895-81	s	RES, CHIP 2.2K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-208-911-81	s	RES, CHIP 10K (1005)
R239	1-208-903-81	s	RES, CHIP 4.7K (1005)
R240	1-208-895-81	s	RES, CHIP 2.2K (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-208-927-81	s	RES, CHIP 47K (1005)
R246	1-208-927-81	s	RES, CHIP 47K (1005)
R247	1-208-927-81	s	RES, CHIP 47K (1005)
R248	1-208-927-81	s	RES, CHIP 47K (1005)
R249	1-208-927-81	s	RES, CHIP 47K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)
R253	1-208-715-11	s	RES, CHIP 22K (1005)
R254	1-208-887-81	s	RES, CHIP 1.0K (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-903-81	s	RES, CHIP 4.7K (1005)
R258	1-208-935-81	s	RES, CHIP 100K (1005)
R259	1-208-935-81	s	RES, CHIP 100K (1005)
R260	1-208-715-11	s	RES, CHIP 22K (1005)
R261	1-208-879-81	s	RES, CHIP 470 (1005)
R262	1-208-895-81	s	RES, CHIP 2.2K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-895-81	s	RES, CHIP 2.2K (1005)
R265	1-208-911-81	s	RES, CHIP 10K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-911-81	s	RES, CHIP 10K (1005)
R268	1-208-903-81	s	RES, CHIP 4.7K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-903-81	s	RES, CHIP 4.7K (1005)
R272	1-208-903-81	s	RES, CHIP 4.7K (1005)
R273	1-208-715-11	s	RES, CHIP 22K (1005)
R274	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-927-81	s	RES, CHIP 47K (1005)
R302	1-208-927-81	s	RES, CHIP 47K (1005)
R303	1-208-927-81	s	RES, CHIP 47K (1005)
R304	1-208-895-81	s	RES, CHIP 2.2K (1005)
R305	1-208-895-81	s	RES, CHIP 2.2K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-895-81	s	RES, CHIP 2.2K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-895-81	s	RES, CHIP 2.2K (1005)
R311	1-218-985-11	s	RES, CHIP 470K (1005)
R312	1-218-985-11	s	RES, CHIP 470K (1005)
R313	1-218-985-11	s	RES, CHIP 470K (1005)
R314	1-218-985-11	s	RES, CHIP 470K (1005)
R315	1-218-985-11	s	RES, CHIP 470K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R319	1-208-927-81	s	RES, CHIP 47K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R322	1-208-715-11	s	RES, CHIP 22K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-903-81	s	RES, CHIP 4.7K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-985-11	s	RES, CHIP 470K (1005)
R406	1-218-985-11	s	RES, CHIP 470K (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-220-878-81	s	RES, CHIP 22 (1005)
R502	1-220-878-81	s	RES, CHIP 22 (1005)
R503	1-220-878-81	s	RES, CHIP 22 (1005)
R505	1-208-911-81	s	RES, CHIP 10K (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R701	1-208-860-81	s	RES, CHIP 75 (1005)
R702	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-208-911-81	s	RES, CHIP 10K (1005)
R832	1-208-887-81	s	RES, CHIP 1.0K (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-911-81	s	RES, CHIP 10K (1005)
R1002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1003	1-208-879-81	s	RES, CHIP 470 (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1008	1-208-879-81	s	RES, CHIP 470 (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1013	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1101	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1102	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1108	1-208-860-81	s	RES, CHIP 75 (1005)
R1109	1-208-860-81	s	RES, CHIP 75 (1005)
R1110	1-208-860-81	s	RES, CHIP 75 (1005)
R1111	1-208-860-81	s	RES, CHIP 75 (1005)
R1112	1-208-860-81	s	RES, CHIP 75 (1005)
R1113	1-208-860-81	s	RES, CHIP 75 (1005)
R1114	1-208-911-81	s	RES, CHIP 10K (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1202	1-220-878-81	s	RES, CHIP 22 (1005)
R1203	1-208-911-81	s	RES, CHIP 10K (1005)
R1206	1-220-878-81	s	RES, CHIP 22 (1005)
R1209	1-220-878-81	s	RES, CHIP 22 (1005)
R1211	1-220-878-81	s	RES, CHIP 22 (1005)
R1214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1220	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1228	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-220-878-81	s	RES, CHIP 22 (1005)
R1230	1-220-878-81	s	RES, CHIP 22 (1005)
R1231	1-220-878-81	s	RES, CHIP 22 (1005)
R1232	1-208-879-81	s	RES, CHIP 470 (1005)
R1233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1234	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1236	1-208-879-81	s	RES, CHIP 470 (1005)
R1237	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1238	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1239	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1242	1-220-878-81	s	RES, CHIP 22 (1005)
R1243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1244	1-208-863-81	s	RES, CHIP 100 (1005)
R1245	1-208-863-81	s	RES, CHIP 100 (1005)
R1247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1248	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1256	1-208-879-81	s	RES, CHIP 470 (1005)
R1257	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1266	1-208-911-81	s	RES, CHIP 10K (1005)
R1268	1-208-911-81	s	RES, CHIP 10K (1005)
R1270	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-855-81	s	RES, CHIP 47 (1005)
R1302	1-220-878-81	s	RES, CHIP 22 (1005)
R1303	1-220-882-81	s	RES, CHIP 33 (1005)
R1304	1-220-882-81	s	RES, CHIP 33 (1005)
R1305	1-220-882-81	s	RES, CHIP 33 (1005)
R1306	1-220-882-81	s	RES, CHIP 33 (1005)
R1307	1-220-882-81	s	RES, CHIP 33 (1005)
R1308	1-220-882-81	s	RES, CHIP 33 (1005)
R1401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-208-863-81	s	RES, CHIP 100 (1005)
R1504	1-208-856-81	s	RES, CHIP 51 (1005)
R1505	1-208-856-81	s	RES, CHIP 51 (1005)
R1506	1-208-856-81	s	RES, CHIP 51 (1005)
R1507	1-208-856-81	s	RES, CHIP 51 (1005)
R1508	1-208-856-81	s	RES, CHIP 51 (1005)
R1509	1-208-856-81	s	RES, CHIP 51 (1005)
R1510	1-208-911-81	s	RES, CHIP 10K (1005)
R1511	1-208-911-81	s	RES, CHIP 10K (1005)
R1512	1-208-855-81	s	RES, CHIP 47 (1005)
R1513	1-208-855-81	s	RES, CHIP 47 (1005)
R1516	1-208-863-81	s	RES, CHIP 100 (1005)
R1517	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1518	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1519	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1520	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1801	1-220-882-81	s	RES, CHIP 33 (1005)
R1803	1-220-882-81	s	RES, CHIP 33 (1005)
R1804	1-220-882-81	s	RES, CHIP 33 (1005)
R1805	1-220-882-81	s	RES, CHIP 33 (1005)
R1806	1-220-882-81	s	RES, CHIP 33 (1005)
R1807	1-220-882-81	s	RES, CHIP 33 (1005)
R1808	1-220-882-81	s	RES, CHIP 33 (1005)
R1809	1-220-882-81	s	RES, CHIP 33 (1005)
R1810	1-220-882-81	s	RES, CHIP 33 (1005)
R1811	1-220-882-81	s	RES, CHIP 33 (1005)
R1812	1-220-882-81	s	RES, CHIP 33 (1005)
R1817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1901	1-220-882-81	s	RES, CHIP 33 (1005)
R1903	1-220-882-81	s	RES, CHIP 33 (1005)
R1904	1-220-882-81	s	RES, CHIP 33 (1005)
R1905	1-220-882-81	s	RES, CHIP 33 (1005)
R1906	1-220-882-81	s	RES, CHIP 33 (1005)
R1907	1-220-882-81	s	RES, CHIP 33 (1005)
R1908	1-220-882-81	s	RES, CHIP 33 (1005)
R1909	1-220-882-81	s	RES, CHIP 33 (1005)
R1910	1-220-882-81	s	RES, CHIP 33 (1005)
R1911	1-220-882-81	s	RES, CHIP 33 (1005)
R1912	1-220-882-81	s	RES, CHIP 33 (1005)
R1917	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2001	1-208-855-81	s	RES, CHIP 47 (1005)
R2002	1-208-855-81	s	RES, CHIP 47 (1005)
R2003	1-208-855-81	s	RES, CHIP 47 (1005)
R2004	1-208-855-81	s	RES, CHIP 47 (1005)
R2005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2007	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-208-855-81	s	RES, CHIP 47 (1005)
R2009	1-208-855-81	s	RES, CHIP 47 (1005)
R2010	1-208-855-81	s	RES, CHIP 47 (1005)
R2011	1-208-935-81	s	RES, CHIP 100K (1005)
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-855-81	s	RES, CHIP 47 (1005)
R2014	1-208-855-81	s	RES, CHIP 47 (1005)
R2015	1-208-855-81	s	RES, CHIP 47 (1005)
R2016	1-208-874-81	s	RES, CHIP 300 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R2017	1-208-935-81	s	RES, CHIP 100K (1005)
R2018	1-208-855-81	s	RES, CHIP 47 (1005)
R2019	1-208-855-81	s	RES, CHIP 47 (1005)
R2020	1-208-855-81	s	RES, CHIP 47 (1005)
R2021	1-208-855-81	s	RES, CHIP 47 (1005)
R2022	1-208-855-81	s	RES, CHIP 47 (1005)
R2023	1-208-855-81	s	RES, CHIP 47 (1005)
R2024	1-208-855-81	s	RES, CHIP 47 (1005)
R2025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2026	1-220-878-81	s	RES, CHIP 22 (1005)
R2027	1-220-878-81	s	RES, CHIP 22 (1005)
R2028	1-208-874-81	s	RES, CHIP 300 (1005)
R2029	1-208-855-81	s	RES, CHIP 47 (1005)
R2030	1-208-855-81	s	RES, CHIP 47 (1005)
R2031	1-208-855-81	s	RES, CHIP 47 (1005)
R2032	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-208-855-81	s	RES, CHIP 47 (1005)
R2109	1-208-855-81	s	RES, CHIP 47 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-935-81	s	RES, CHIP 100K (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-855-81	s	RES, CHIP 47 (1005)
R2114	1-208-855-81	s	RES, CHIP 47 (1005)
R2115	1-208-855-81	s	RES, CHIP 47 (1005)
R2116	1-208-874-81	s	RES, CHIP 300 (1005)
R2117	1-208-935-81	s	RES, CHIP 100K (1005)
R2118	1-208-855-81	s	RES, CHIP 47 (1005)
R2119	1-208-855-81	s	RES, CHIP 47 (1005)
R2120	1-208-855-81	s	RES, CHIP 47 (1005)
R2121	1-208-855-81	s	RES, CHIP 47 (1005)
R2122	1-208-855-81	s	RES, CHIP 47 (1005)
R2123	1-208-855-81	s	RES, CHIP 47 (1005)
R2124	1-208-855-81	s	RES, CHIP 47 (1005)
R2125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2126	1-220-878-81	s	RES, CHIP 22 (1005)
R2127	1-220-878-81	s	RES, CHIP 22 (1005)
R2128	1-208-874-81	s	RES, CHIP 300 (1005)
R2129	1-208-855-81	s	RES, CHIP 47 (1005)
R2130	1-208-855-81	s	RES, CHIP 47 (1005)
R2131	1-208-855-81	s	RES, CHIP 47 (1005)
R2132	1-208-855-81	s	RES, CHIP 47 (1005)
R2201	1-220-882-81	s	RES, CHIP 33 (1005)
R2202	1-220-882-81	s	RES, CHIP 33 (1005)
R2203	1-220-882-81	s	RES, CHIP 33 (1005)
R2204	1-220-882-81	s	RES, CHIP 33 (1005)
R2205	1-220-882-81	s	RES, CHIP 33 (1005)
R2206	1-220-882-81	s	RES, CHIP 33 (1005)
R2207	1-220-882-81	s	RES, CHIP 33 (1005)
R2208	1-220-882-81	s	RES, CHIP 33 (1005)
R2209	1-220-882-81	s	RES, CHIP 33 (1005)
R2210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2211	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R2212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2215	1-208-860-81	s	RES, CHIP 75 (1005)
R2217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2218	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2219	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2220	1-208-715-11	s	RES, CHIP 22K (1005)
R2221	1-220-878-81	s	RES, CHIP 22 (1005)
R2222	1-220-882-81	s	RES, CHIP 33 (1005)
R2223	1-220-882-81	s	RES, CHIP 33 (1005)
R2224	1-220-882-81	s	RES, CHIP 33 (1005)
R2225	1-220-882-81	s	RES, CHIP 33 (1005)
R2226	1-220-882-81	s	RES, CHIP 33 (1005)
R2227	1-220-882-81	s	RES, CHIP 33 (1005)
R2228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2301	1-220-882-81	s	RES, CHIP 33 (1005)
R2302	1-220-882-81	s	RES, CHIP 33 (1005)
R2303	1-220-882-81	s	RES, CHIP 33 (1005)
R2304	1-220-882-81	s	RES, CHIP 33 (1005)
R2305	1-220-882-81	s	RES, CHIP 33 (1005)
R2306	1-220-882-81	s	RES, CHIP 33 (1005)
R2307	1-220-882-81	s	RES, CHIP 33 (1005)
R2308	1-220-882-81	s	RES, CHIP 33 (1005)
R2309	1-220-882-81	s	RES, CHIP 33 (1005)
R2310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2315	1-208-860-81	s	RES, CHIP 75 (1005)
R2317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2319	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2320	1-208-715-11	s	RES, CHIP 22K (1005)
R2321	1-220-878-81	s	RES, CHIP 22 (1005)
R2322	1-220-882-81	s	RES, CHIP 33 (1005)
R2323	1-220-882-81	s	RES, CHIP 33 (1005)
R2324	1-220-882-81	s	RES, CHIP 33 (1005)
R2325	1-220-882-81	s	RES, CHIP 33 (1005)
R2326	1-220-882-81	s	RES, CHIP 33 (1005)
R2327	1-220-882-81	s	RES, CHIP 33 (1005)
R2328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2403	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2406	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2409	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2411	1-208-856-81	s	RES, CHIP 51 (1005)
R2412	1-208-856-81	s	RES, CHIP 51 (1005)
R2413	1-208-927-81	s	RES, CHIP 47K (1005)
R2415	1-208-856-81	s	RES, CHIP 51 (1005)
R2416	1-208-856-81	s	RES, CHIP 51 (1005)
R2417	1-208-856-81	s	RES, CHIP 51 (1005)
R2418	1-208-856-81	s	RES, CHIP 51 (1005)
R2419	1-208-856-81	s	RES, CHIP 51 (1005)
R2420	1-208-856-81	s	RES, CHIP 51 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R2421	1-208-856-81	s	RES, CHIP 51 (1005)
R2422	1-208-856-81	s	RES, CHIP 51 (1005)
R2423	1-218-989-11	s	RES, CHIP 1M (1005)
R2424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2425	1-208-871-81	s	RES, CHIP 220 (1005)
R2426	1-208-871-81	s	RES, CHIP 220 (1005)
R2427	1-208-871-81	s	RES, CHIP 220 (1005)
R2428	1-208-871-81	s	RES, CHIP 220 (1005)
R2429	1-208-871-81	s	RES, CHIP 220 (1005)
R2430	1-208-871-81	s	RES, CHIP 220 (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2432	1-208-860-81	s	RES, CHIP 75 (1005)
R2503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2504	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2506	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2507	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2508	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2509	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2510	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2511	1-208-856-81	s	RES, CHIP 51 (1005)
R2512	1-208-856-81	s	RES, CHIP 51 (1005)
R2513	1-208-927-81	s	RES, CHIP 47K (1005)
R2515	1-208-856-81	s	RES, CHIP 51 (1005)
R2516	1-208-856-81	s	RES, CHIP 51 (1005)
R2517	1-208-856-81	s	RES, CHIP 51 (1005)
R2518	1-208-856-81	s	RES, CHIP 51 (1005)
R2519	1-208-856-81	s	RES, CHIP 51 (1005)
R2520	1-208-856-81	s	RES, CHIP 51 (1005)
R2521	1-208-856-81	s	RES, CHIP 51 (1005)
R2522	1-208-856-81	s	RES, CHIP 51 (1005)
R2523	1-218-989-11	s	RES, CHIP 1M (1005)
R2524	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2525	1-208-871-81	s	RES, CHIP 220 (1005)
R2526	1-208-871-81	s	RES, CHIP 220 (1005)
R2527	1-208-871-81	s	RES, CHIP 220 (1005)
R2528	1-208-871-81	s	RES, CHIP 220 (1005)
R2529	1-208-871-81	s	RES, CHIP 220 (1005)
R2530	1-208-871-81	s	RES, CHIP 220 (1005)
R2531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2532	1-208-860-81	s	RES, CHIP 75 (1005)
R2701	1-220-878-81	s	RES, CHIP 22 (1005)
R2702	1-220-878-81	s	RES, CHIP 22 (1005)
R2703	1-220-878-81	s	RES, CHIP 22 (1005)
R2704	1-220-878-81	s	RES, CHIP 22 (1005)
R2705	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2706	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2707	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2709	1-218-989-11	s	RES, CHIP 1M (1005)
R2710	1-208-911-81	s	RES, CHIP 10K (1005)
R2711	1-208-911-81	s	RES, CHIP 10K (1005)
R2712	1-208-879-81	s	RES, CHIP 470 (1005)
R2713	1-208-879-81	s	RES, CHIP 470 (1005)
R2714	1-208-879-81	s	RES, CHIP 470 (1005)
R2715	1-208-879-81	s	RES, CHIP 470 (1005)
R2716	1-208-879-81	s	RES, CHIP 470 (1005)
R2717	1-208-879-81	s	RES, CHIP 470 (1005)
R2718	1-208-879-81	s	RES, CHIP 470 (1005)
R2719	1-208-879-81	s	RES, CHIP 470 (1005)
R2720	1-208-879-81	s	RES, CHIP 470 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R2801	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2802	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2804	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2805	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2806	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2808	1-208-911-81	s	RES, CHIP 10K (1005)
R2809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2814	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2815	1-208-856-81	s	RES, CHIP 51 (1005)
R2816	1-208-856-81	s	RES, CHIP 51 (1005)
R2817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2824	1-208-911-81	s	RES, CHIP 10K (1005)
R2825	1-218-989-11	s	RES, CHIP 1M (1005)
R2826	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2827	1-208-871-81	s	RES, CHIP 220 (1005)
R2828	1-208-871-81	s	RES, CHIP 220 (1005)
R2829	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2830	1-208-871-81	s	RES, CHIP 220 (1005)
R2831	1-208-856-81	s	RES, CHIP 51 (1005)
R2832	1-208-856-81	s	RES, CHIP 51 (1005)
R2833	1-208-856-81	s	RES, CHIP 51 (1005)
R2834	1-208-856-81	s	RES, CHIP 51 (1005)
R2835	1-208-856-81	s	RES, CHIP 51 (1005)
R2836	1-208-856-81	s	RES, CHIP 51 (1005)
R2837	1-208-856-81	s	RES, CHIP 51 (1005)
R2838	1-208-856-81	s	RES, CHIP 51 (1005)
R2839	1-208-860-81	s	RES, CHIP 75 (1005)
R2840	1-208-860-81	s	RES, CHIP 75 (1005)
R2841	1-208-860-81	s	RES, CHIP 75 (1005)
R2842	1-208-860-81	s	RES, CHIP 75 (1005)
R2901	1-220-878-81	s	RES, CHIP 22 (1005)
R2902	1-220-878-81	s	RES, CHIP 22 (1005)
R2903	1-220-878-81	s	RES, CHIP 22 (1005)
R2904	1-220-878-81	s	RES, CHIP 22 (1005)
R2905	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2906	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2907	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2909	1-218-989-11	s	RES, CHIP 1M (1005)
R2910	1-208-911-81	s	RES, CHIP 10K (1005)
R2911	1-208-911-81	s	RES, CHIP 10K (1005)
R2912	1-208-879-81	s	RES, CHIP 470 (1005)
R2913	1-208-879-81	s	RES, CHIP 470 (1005)
R2914	1-208-879-81	s	RES, CHIP 470 (1005)
R2915	1-208-879-81	s	RES, CHIP 470 (1005)
R2916	1-208-879-81	s	RES, CHIP 470 (1005)
R2917	1-208-879-81	s	RES, CHIP 470 (1005)
R2918	1-208-879-81	s	RES, CHIP 470 (1005)
R2919	1-208-879-81	s	RES, CHIP 470 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R2920	1-208-879-81	s	RES, CHIP 470 (1005)
R3002	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3101	1-208-856-81	s	RES, CHIP 51 (1005)
R3102	1-208-856-81	s	RES, CHIP 51 (1005)
R3103	1-208-856-81	s	RES, CHIP 51 (1005)
R3104	1-208-856-81	s	RES, CHIP 51 (1005)
R3105	1-208-856-81	s	RES, CHIP 51 (1005)
R3106	1-208-856-81	s	RES, CHIP 51 (1005)
R3107	1-208-856-81	s	RES, CHIP 51 (1005)
R3108	1-208-856-81	s	RES, CHIP 51 (1005)
R3109	1-208-856-81	s	RES, CHIP 51 (1005)
R3110	1-208-856-81	s	RES, CHIP 51 (1005)
R3111	1-208-856-81	s	RES, CHIP 51 (1005)
R3112	1-208-856-81	s	RES, CHIP 51 (1005)
R3113	1-208-856-81	s	RES, CHIP 51 (1005)
R3114	1-208-856-81	s	RES, CHIP 51 (1005)
R3115	1-208-856-81	s	RES, CHIP 51 (1005)
R3116	1-208-856-81	s	RES, CHIP 51 (1005)
R3117	1-208-856-81	s	RES, CHIP 51 (1005)
R3118	1-208-856-81	s	RES, CHIP 51 (1005)
R3119	1-208-856-81	s	RES, CHIP 51 (1005)
R3120	1-208-856-81	s	RES, CHIP 51 (1005)
R3121	1-208-856-81	s	RES, CHIP 51 (1005)
R3122	1-208-856-81	s	RES, CHIP 51 (1005)
R3123	1-208-856-81	s	RES, CHIP 51 (1005)
R3124	1-208-856-81	s	RES, CHIP 51 (1005)
R3125	1-208-860-81	s	RES, CHIP 75 (1005)
R3126	1-208-860-81	s	RES, CHIP 75 (1005)
R3127	1-208-860-81	s	RES, CHIP 75 (1005)
R3128	1-208-860-81	s	RES, CHIP 75 (1005)
R3129	1-208-860-81	s	RES, CHIP 75 (1005)
R3130	1-208-860-81	s	RES, CHIP 75 (1005)
R3131	1-208-860-81	s	RES, CHIP 75 (1005)
R3132	1-208-860-81	s	RES, CHIP 75 (1005)
R3133	1-208-860-81	s	RES, CHIP 75 (1005)
R3134	1-208-860-81	s	RES, CHIP 75 (1005)
R3135	1-208-860-81	s	RES, CHIP 75 (1005)
R3136	1-208-860-81	s	RES, CHIP 75 (1005)
R3137	1-208-856-81	s	RES, CHIP 51 (1005)
R3138	1-208-856-81	s	RES, CHIP 51 (1005)
R3139	1-208-856-81	s	RES, CHIP 51 (1005)
R3140	1-208-856-81	s	RES, CHIP 51 (1005)
R3141	1-208-856-81	s	RES, CHIP 51 (1005)
R3142	1-208-856-81	s	RES, CHIP 51 (1005)
R3143	1-208-856-81	s	RES, CHIP 51 (1005)
R3144	1-208-856-81	s	RES, CHIP 51 (1005)
R3145	1-208-856-81	s	RES, CHIP 51 (1005)
R3146	1-208-856-81	s	RES, CHIP 51 (1005)
R3147	1-208-856-81	s	RES, CHIP 51 (1005)
R3148	1-208-856-81	s	RES, CHIP 51 (1005)
R3149	1-208-856-81	s	RES, CHIP 51 (1005)
R3150	1-208-856-81	s	RES, CHIP 51 (1005)
R3151	1-208-856-81	s	RES, CHIP 51 (1005)
R3152	1-208-856-81	s	RES, CHIP 51 (1005)
R3153	1-208-856-81	s	RES, CHIP 51 (1005)
R3154	1-208-856-81	s	RES, CHIP 51 (1005)
R3155	1-208-856-81	s	RES, CHIP 51 (1005)
R3156	1-208-856-81	s	RES, CHIP 51 (1005)
R3157	1-208-856-81	s	RES, CHIP 51 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R3158	1-208-856-81	s	RES, CHIP 51 (1005)
R3159	1-208-856-81	s	RES, CHIP 51 (1005)
R3160	1-208-856-81	s	RES, CHIP 51 (1005)
R3161	1-208-860-81	s	RES, CHIP 75 (1005)
R3162	1-208-860-81	s	RES, CHIP 75 (1005)
R3163	1-208-860-81	s	RES, CHIP 75 (1005)
R3164	1-208-860-81	s	RES, CHIP 75 (1005)
R3165	1-208-860-81	s	RES, CHIP 75 (1005)
R3166	1-208-860-81	s	RES, CHIP 75 (1005)
R3167	1-208-860-81	s	RES, CHIP 75 (1005)
R3168	1-208-860-81	s	RES, CHIP 75 (1005)
R3169	1-208-860-81	s	RES, CHIP 75 (1005)
R3170	1-208-860-81	s	RES, CHIP 75 (1005)
R3171	1-208-860-81	s	RES, CHIP 75 (1005)
R3172	1-208-860-81	s	RES, CHIP 75 (1005)
R3201	1-208-855-81	s	RES, CHIP 47 (1005)
R3202	1-220-878-81	s	RES, CHIP 22 (1005)
R3242	1-208-911-81	s	RES, CHIP 10K (1005)
R3243	1-208-911-81	s	RES, CHIP 10K (1005)
R3303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3405	1-208-863-81	s	RES, CHIP 100 (1005)
R3406	1-208-863-81	s	RES, CHIP 100 (1005)
R3407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3411	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3417	1-208-863-81	s	RES, CHIP 100 (1005)
R3418	1-208-863-81	s	RES, CHIP 100 (1005)
R3419	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3420	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3423	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3509	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3510	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3511	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3512	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3513	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3514	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3515	1-208-911-81	s	RES, CHIP 10K (1005)
R3516	1-208-911-81	s	RES, CHIP 10K (1005)
R3517	1-208-863-81	s	RES, CHIP 100 (1005)
R3518	1-208-863-81	s	RES, CHIP 100 (1005)
R3519	1-208-860-81	s	RES, CHIP 75 (1005)
R3520	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R3602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3609	1-208-911-81	s	RES, CHIP 10K (1005)
R3611	1-208-911-81	s	RES, CHIP 10K (1005)
R3613	1-208-895-81	s	RES, CHIP 2.2K (1005)
R3614	1-208-911-81	s	RES, CHIP 10K (1005)
R3615	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3617	1-208-911-81	s	RES, CHIP 10K (1005)
R3620	1-208-911-81	s	RES, CHIP 10K (1005)
R3621	1-208-911-81	s	RES, CHIP 10K (1005)
R3622	1-208-911-81	s	RES, CHIP 10K (1005)
R3623	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3635	1-208-671-11	s	RES, CHIP 330 (1005)
R3636	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3637	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3638	1-208-871-81	s	RES, CHIP 220 (1005)
R3639	1-208-871-81	s	RES, CHIP 220 (1005)
R3640	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3641	1-208-871-81	s	RES, CHIP 220 (1005)
R3642	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3643	1-208-911-81	s	RES, CHIP 10K (1005)
R3701	1-220-878-81	s	RES, CHIP 22 (1005)
R3702	1-220-878-81	s	RES, CHIP 22 (1005)
R3703	1-220-878-81	s	RES, CHIP 22 (1005)
R3704	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3705	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3706	1-208-856-81	s	RES, CHIP 51 (1005)
R3707	1-208-856-81	s	RES, CHIP 51 (1005)
R3708	1-208-856-81	s	RES, CHIP 51 (1005)
R3709	1-208-879-81	s	RES, CHIP 470 (1005)
R3710	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3711	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3805	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3807	1-220-878-81	s	RES, CHIP 22 (1005)
R3808	1-220-878-81	s	RES, CHIP 22 (1005)
R3809	1-220-878-81	s	RES, CHIP 22 (1005)
R3810	1-220-878-81	s	RES, CHIP 22 (1005)
R3811	1-220-878-81	s	RES, CHIP 22 (1005)
R3812	1-220-878-81	s	RES, CHIP 22 (1005)
R3813	1-220-878-81	s	RES, CHIP 22 (1005)
R3814	1-220-878-81	s	RES, CHIP 22 (1005)
R3815	1-220-878-81	s	RES, CHIP 22 (1005)
R3816	1-220-878-81	s	RES, CHIP 22 (1005)
R3817	1-220-878-81	s	RES, CHIP 22 (1005)
R3818	1-220-878-81	s	RES, CHIP 22 (1005)
R3819	1-220-878-81	s	RES, CHIP 22 (1005)
R3820	1-220-878-81	s	RES, CHIP 22 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R3821	1-220-878-81	s	RES, CHIP 22 (1005)
R3822	1-220-878-81	s	RES, CHIP 22 (1005)
R3823	1-220-878-81	s	RES, CHIP 22 (1005)
R3824	1-220-878-81	s	RES, CHIP 22 (1005)
R3825	1-220-878-81	s	RES, CHIP 22 (1005)
R3826	1-220-878-81	s	RES, CHIP 22 (1005)
R3835	1-220-878-81	s	RES, CHIP 22 (1005)
R3837	1-220-878-81	s	RES, CHIP 22 (1005)
R3839	1-220-878-81	s	RES, CHIP 22 (1005)
R3844	1-220-878-81	s	RES, CHIP 22 (1005)
R3846	1-220-878-81	s	RES, CHIP 22 (1005)
R3848	1-220-878-81	s	RES, CHIP 22 (1005)
R3853	1-220-878-81	s	RES, CHIP 22 (1005)
R3854	1-220-878-81	s	RES, CHIP 22 (1005)
R3855	1-220-878-81	s	RES, CHIP 22 (1005)
R3861	1-220-878-81	s	RES, CHIP 22 (1005)
R3902	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3903	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3906	1-208-855-81	s	RES, CHIP 47 (1005)
R3907	1-208-855-81	s	RES, CHIP 47 (1005)
R3908	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3914	1-220-882-81	s	RES, CHIP 33 (1005)
R3915	1-220-882-81	s	RES, CHIP 33 (1005)
R3916	1-220-882-81	s	RES, CHIP 33 (1005)
R3917	1-220-882-81	s	RES, CHIP 33 (1005)
R3918	1-208-911-81	s	RES, CHIP 10K (1005)
R3921	1-208-911-81	s	RES, CHIP 10K (1005)
R3923	1-208-911-81	s	RES, CHIP 10K (1005)
R4102	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4103	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4107	1-208-911-81	s	RES, CHIP 10K (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4114	1-208-856-81	s	RES, CHIP 51 (1005)
R4115	1-208-856-81	s	RES, CHIP 51 (1005)
R4116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4123	1-208-911-81	s	RES, CHIP 10K (1005)
R4124	1-218-989-11	s	RES, CHIP 1M (1005)
R4125	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4126	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4127	1-208-879-81	s	RES, CHIP 470 (1005)
R4128	1-208-879-81	s	RES, CHIP 470 (1005)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R4129	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4130	1-208-879-81	s	RES, CHIP 470 (1005)
R4131	1-208-856-81	s	RES, CHIP 51 (1005)
R4132	1-208-856-81	s	RES, CHIP 51 (1005)
R4133	1-208-856-81	s	RES, CHIP 51 (1005)
R4134	1-208-856-81	s	RES, CHIP 51 (1005)
R4135	1-208-856-81	s	RES, CHIP 51 (1005)
R4136	1-208-856-81	s	RES, CHIP 51 (1005)
R4137	1-208-856-81	s	RES, CHIP 51 (1005)
R4138	1-208-856-81	s	RES, CHIP 51 (1005)
R4139	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4140	1-208-903-81	s	RES, CHIP 4.7K (1005)
RB301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB302	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB402	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB403	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB504	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB508	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB509	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB510	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB511	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB512	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB513	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB514	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB516	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB517	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB518	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB519	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB520	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB521	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB522	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB523	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB524	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB527	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB528	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB529	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB530	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB531	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB532	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB613	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB614	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB615	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB616	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB617	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB618	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB619	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB620	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB621	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB622	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB623	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB624	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB625	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB626	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB627	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB628	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB629	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB630	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB631	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB718	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB719	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB720	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB721	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB722	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB802	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB803	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB804	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB805	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB806	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB807	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB808	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB909	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB910	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB911	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB912	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB914	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB916	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB917	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB918	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB919	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB920	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB921	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1303	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1304	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1702	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1704	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1801	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1802	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1803	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1804	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1805	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1806	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1807	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1808	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1809	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1810	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1811	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1812	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1813	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1814	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1815	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1816	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1817	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1901	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1902	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1903	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1904	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1905	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1906	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1907	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1908	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1909	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1910	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1911	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1912	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1913	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1914	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1915	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1916	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1917	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2006	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB2007	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2008	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2009	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2010	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2011	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2012	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2018	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2019	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2020	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2021	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2022	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2023	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2024	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2119	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2121	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2122	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2123	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2124	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2202	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2203	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2204	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2205	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2206	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2207	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2301	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2302	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2303	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2304	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2305	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2306	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2307	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2703	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB2704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2706	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB2901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2906	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB3230	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3231	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3232	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3233	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3235	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3236	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3237	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3238	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3239	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3240	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3241	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3242	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3243	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3244	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3245	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3246	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3502	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3503	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3504	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3505	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3506	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3507	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB3508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3509	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3511	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3516	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3517	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3518	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3519	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3520	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3521	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3522	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3523	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3524	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3601	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3602	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3603	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3604	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3605	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3606	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3607	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3609	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB3610	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3611	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3909	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3910	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3911	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3912	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3914	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3916	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3920	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3921	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3922	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S401	1-771-721-21	s	SWITCH, TACTILE
S402	1-771-721-21	s	SWITCH, TACTILE
S501	1-771-721-21	s	SWITCH, TACTILE
S901	1-692-271-41	s	SWITCH, SLIDE
S902	1-692-271-41	s	SWITCH, SLIDE
S903	1-692-271-41	s	SWITCH, SLIDE
S904	1-692-271-41	s	SWITCH, SLIDE
S1301	1-692-271-41	s	SWITCH, SLIDE
S2201	1-771-721-21	s	SWITCH, TACTILE
S2202	1-692-271-41	s	SWITCH, SLIDE
S2301	1-771-721-21	s	SWITCH, TACTILE
S2302	1-692-271-41	s	SWITCH, SLIDE
T2801	1-445-895-11	s	TRANSFORMER, PULSE
T3101	1-445-895-11	s	TRANSFORMER, PULSE
T3102	1-445-895-11	s	TRANSFORMER, PULSE
T3103	1-445-895-11	s	TRANSFORMER, PULSE
T3104	1-445-895-11	s	TRANSFORMER, PULSE
T3105	1-445-895-11	s	TRANSFORMER, PULSE
T3106	1-445-895-11	s	TRANSFORMER, PULSE
TP219	1-535-877-22	s	CHIP, CHECKER
TP223	1-535-877-22	s	CHIP, CHECKER
TP224	1-535-877-22	s	CHIP, CHECKER
TP225	1-535-877-22	s	CHIP, CHECKER
TP226	1-535-877-22	s	CHIP, CHECKER
TP227	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP304	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP904	1-535-877-22	s	CHIP, CHECKER

(CA-82 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
TP1001	1-535-877-22	s	CHIP, CHECKER
X801	1-813-493-11	s	OSCILLATOR, CRYSTAL
X1301	1-813-493-11	s	OSCILLATOR, CRYSTAL
X2201	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2301	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2401	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2501	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2701	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2801	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2901	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X3201	1-813-493-11	s	OSCILLATOR, CRYSTAL
X4101	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)

CA-82 BOARD (SUFFIX 14)

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	4-143-557-01	s	SPRING, COMPRESSION
2pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
1pc	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
0.75pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
1pc	7-626-320-61	s	PIN, SPRING 3X18
1.23pcs	7-640-005-23	s	SOLDER (F3M705,D0.8) 1.0KG
10pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-137-894-21	s	CAP, CHIP ELECT 470MF
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C204	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C205	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C206	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C207	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C208	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C239	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C241	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C242	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C243	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C244	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C245	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C246	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C247	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C248	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C301	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C304	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C305	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C306	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C307	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C308	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C315	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C316	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C317	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C318	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C319	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C320	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C323	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C324	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C325	1-116-118-11	s	CAP, ELECT 47MF 105
C326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C327	1-116-118-11	s	CAP, ELECT 47MF 105
C401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C501	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C503	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C610	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C620	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C622	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C634	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C636	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C638	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C640	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C642	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C644	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C646	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C728	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C740	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C911	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C933	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C936	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1003	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1004	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1005	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1019	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1042	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1043	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1101	1-116-118-11	s	CAP, ELECT 47MF 105
C1102	1-116-118-11	s	CAP, ELECT 47MF 105
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1132	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1217	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1219	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1222	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1224	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1225	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1227	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1228	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C1302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1303	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C1304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1305	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C1306	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1307	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1315	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1318	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1325	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1327	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1329	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1331	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1333	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1335	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1337	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1339	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1341	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1343	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1344	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1345	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1348	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1349	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1352	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1353	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1356	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1357	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1360	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1361	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1364	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1365	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1367	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1369	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1371	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1372	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1373	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1375	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1377	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1378	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1381	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1382	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1384	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1385	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1386	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1387	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1388	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1389	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1390	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1391	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1392	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1393	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1394	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1395	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1396	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1397	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1399	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1451	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1453	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1455	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1457	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1459	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1461	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1462	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1517	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1523	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1525	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1531	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1803	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1903	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2001	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2018	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2019	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2101	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2117	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2119	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2201	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2217	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2218	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2301	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2303	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2401	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2402	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2403	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2405	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2408	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2418	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2419	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2421	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2423	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2428	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2429	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2431	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2432	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2433	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2434	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2435	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2436	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2437	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2438	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2439	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2440	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2441	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2442	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2443	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2444	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2445	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2446	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2447	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2448	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2449	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2450	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2451	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2452	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2453	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2454	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2455	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2456	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2457	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2458	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2459	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2460	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2461	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2462	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2463	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2464	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2465	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2466	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2467	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2468	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2469	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2470	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2471	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2472	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2473	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2474	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2476	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2477	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2478	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2479	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2480	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2481	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2482	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2483	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2484	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2501	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2502	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2505	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2508	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2511	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2521	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2523	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2528	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2541	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2542	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2543	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2546	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2547	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2548	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2550	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2551	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2552	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2553	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2554	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2555	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2556	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2557	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2558	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2559	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2560	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2561	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2562	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2563	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2564	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2565	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2566	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2567	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2568	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2569	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2570	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2571	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2572	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2573	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2574	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2576	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2577	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2578	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2579	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2580	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2581	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2582	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2583	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2584	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2601	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2603	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2605	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2607	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2609	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2610	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2611	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2613	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2615	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2617	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2618	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2701	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2704	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2706	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2713	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2715	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2717	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2722	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2724	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2728	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2730	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2742	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2743	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2744	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2746	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2747	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2748	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2750	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2751	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2752	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2753	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2754	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2755	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2756	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2757	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2758	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2759	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2760	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2801	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2805	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2807	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2811	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2813	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2815	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2817	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2818	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2822	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2823	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2828	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2829	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2830	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2831	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2832	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2834	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2840	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C2901	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2907	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2909	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2910	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2913	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2915	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2917	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2920	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2924	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2925	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2927	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2936	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2937	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2946	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2947	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2948	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2950	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2951	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2952	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2954	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2955	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2956	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2957	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2958	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2959	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2960	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2961	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2962	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2963	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2964	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3114	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3115	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3116	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3117	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3118	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3119	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3120	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3121	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3122	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3123	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3124	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3125	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3129	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3132	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3136	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3149	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3150	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3151	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3176	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3178	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3179	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3181	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3183	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3184	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3185	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3186	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3187	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3188	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3189	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3190	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3191	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3192	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3193	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3194	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3195	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3196	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3197	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3198	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3199	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3213	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3214	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3233	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3235	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3237	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3239	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3240	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3241	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3242	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3243	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3244	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3245	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3246	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3247	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3248	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3249	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3250	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3251	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3252	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3253	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3301	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3304	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3401	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3403	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3405	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3407	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3501	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3521	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3523	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3525	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3528	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3531	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3541	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3542	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3543	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3546	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3547	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3548	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3550	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3551	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3552	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3553	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3554	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3555	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3601	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3602	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3603	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3605	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3607	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3608	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3609	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3610	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3611	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3612	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3613	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3614	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3615	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3616	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3617	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3618	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3619	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3620	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3621	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3622	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3623	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3624	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3625	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3635	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3636	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C3637	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3639	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3642	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3644	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3646	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3647	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3648	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3649	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3650	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3652	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3653	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3701	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3711	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3713	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3714	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3917	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3929	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3931	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4101	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4104	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4107	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4110	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4117	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4122	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C4123	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C4124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4129	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4130	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4131	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4136	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4137	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
CN1101	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN1102	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN2201	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2202	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2203	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2301	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2302	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN2303	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN3701	1-815-893-11	s	CONNECTOR, CARD (CFA) 50P
CN3801	1-770-627-21	s	PIN, CONNECTOR 10P
CN3901	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN3902	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN4101	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D201	6-502-197-01	s	DI SML-D12M8WT86SM
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D204	6-502-197-01	s	DI SML-D12M8WT86SM
D205	6-502-197-01	s	DI SML-D12M8WT86SM
D206	6-502-197-01	s	DI SML-D12M8WT86SM
D301	8-719-069-28	s	DI 1SS400FJTE61
D302	8-719-069-28	s	DI 1SS400FJTE61
D303	8-719-069-28	s	DI 1SS400FJTE61
D304	8-719-069-28	s	DI 1SS400FJTE61
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D308	6-502-197-01	s	DI SML-D12M8WT86SM
D309	8-719-069-28	s	DI 1SS400FJTE61
D310	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-598-01	s	DI SML-D12U8WT86
D802	6-502-197-01	s	DI SML-D12M8WT86SM
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM
D805	6-502-197-01	s	DI SML-D12M8WT86SM
D901	6-502-197-01	s	DI SML-D12M8WT86SM
D902	6-502-197-01	s	DI SML-D12M8WT86SM
D903	6-502-197-01	s	DI SML-D12M8WT86SM
D904	6-502-197-01	s	DI SML-D12M8WT86SM
D905	6-502-197-01	s	DI SML-D12M8WT86SM
D906	6-502-197-01	s	DI SML-D12M8WT86SM
D907	6-502-197-01	s	DI SML-D12M8WT86SM
D908	6-502-197-01	s	DI SML-D12M8WT86SM
D909	6-502-197-01	s	DI SML-D12M8WT86SM
D910	6-502-197-01	s	DI SML-D12M8WT86SM
D911	6-502-197-01	s	DI SML-D12M8WT86SM
D912	6-502-197-01	s	DI SML-D12M8WT86SM
D913	6-502-197-01	s	DI SML-D12M8WT86SM
D914	6-502-197-01	s	DI SML-D12M8WT86SM
D915	6-502-197-01	s	DI SML-D12M8WT86SM
D916	6-502-197-01	s	DI SML-D12M8WT86SM
D917	6-502-197-01	s	DI SML-D12M8WT86SM
D918	6-502-197-01	s	DI SML-D12M8WT86SM
D919	6-502-197-01	s	DI SML-D12M8WT86SM
D920	6-502-197-01	s	DI SML-D12M8WT86SM
D1002	8-719-056-65	s	DIODE 1SS372-TE85L

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
D1101	6-502-197-01	s	DI SML-D12M8WT86SM
D1102	6-502-197-01	s	DI SML-D12M8WT86SM
D1201	6-502-598-01	s	DI SML-D12U8WT86
D1301	6-502-197-01	s	DI SML-D12M8WT86SM
D1302	6-502-197-01	s	DI SML-D12M8WT86SM
D1303	6-502-197-01	s	DI SML-D12M8WT86SM
D1304	6-502-197-01	s	DI SML-D12M8WT86SM
D1305	6-502-197-01	s	DI SML-D12M8WT86SM
D1306	6-502-197-01	s	DI SML-D12M8WT86SM
D1307	6-502-197-01	s	DI SML-D12M8WT86SM
D1308	6-502-197-01	s	DI SML-D12M8WT86SM
D2201	6-502-197-01	s	DI SML-D12M8WT86SM
D2202	6-502-197-01	s	DI SML-D12M8WT86SM
D2203	6-502-197-01	s	DI SML-D12M8WT86SM
D2204	6-502-197-01	s	DI SML-D12M8WT86SM
D2301	6-502-197-01	s	DI SML-D12M8WT86SM
D2302	6-502-197-01	s	DI SML-D12M8WT86SM
D2303	6-502-197-01	s	DI SML-D12M8WT86SM
D2304	6-502-197-01	s	DI SML-D12M8WT86SM
D2401	6-502-197-01	s	DI SML-D12M8WT86SM
D2402	6-502-197-01	s	DI SML-D12M8WT86SM
D2403	6-502-197-01	s	DI SML-D12M8WT86SM
D2404	6-502-197-01	s	DI SML-D12M8WT86SM
D2405	6-502-197-01	s	DI SML-D12M8WT86SM
D2406	6-502-197-01	s	DI SML-D12M8WT86SM
D2501	6-502-197-01	s	DI SML-D12M8WT86SM
D2502	6-502-197-01	s	DI SML-D12M8WT86SM
D2503	6-502-197-01	s	DI SML-D12M8WT86SM
D2504	6-502-197-01	s	DI SML-D12M8WT86SM
D2505	6-502-197-01	s	DI SML-D12M8WT86SM
D2506	6-502-197-01	s	DI SML-D12M8WT86SM
D2701	6-502-197-01	s	DI SML-D12M8WT86SM
D2702	6-502-197-01	s	DI SML-D12M8WT86SM
D2703	6-502-197-01	s	DI SML-D12M8WT86SM
D2704	6-502-197-01	s	DI SML-D12M8WT86SM
D2705	6-502-197-01	s	DI SML-D12M8WT86SM
D2706	6-502-197-01	s	DI SML-D12M8WT86SM
D2707	6-502-197-01	s	DI SML-D12M8WT86SM
D2708	6-502-197-01	s	DI SML-D12M8WT86SM
D2709	6-502-197-01	s	DI SML-D12M8WT86SM
D2801	6-502-197-01	s	DI SML-D12M8WT86SM
D2802	6-502-197-01	s	DI SML-D12M8WT86SM
D2803	6-502-197-01	s	DI SML-D12M8WT86SM
D2901	6-502-197-01	s	DI SML-D12M8WT86SM
D2902	6-502-197-01	s	DI SML-D12M8WT86SM
D2903	6-502-197-01	s	DI SML-D12M8WT86SM
D2904	6-502-197-01	s	DI SML-D12M8WT86SM
D2905	6-502-197-01	s	DI SML-D12M8WT86SM
D2906	6-502-197-01	s	DI SML-D12M8WT86SM
D2907	6-502-197-01	s	DI SML-D12M8WT86SM
D2908	6-502-197-01	s	DI SML-D12M8WT86SM
D2909	6-502-197-01	s	DI SML-D12M8WT86SM
D3234	8-719-989-01	s	DIODE DA221-TL
D3235	8-719-989-01	s	DIODE DA221-TL
D3236	8-719-989-01	s	DIODE DA221-TL
D3237	8-719-989-01	s	DIODE DA221-TL
D3238	8-719-989-01	s	DIODE DA221-TL
D3239	8-719-989-01	s	DIODE DA221-TL
D3240	8-719-989-01	s	DIODE DA221-TL

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
D3241	8-719-989-01	s	DIODE DA221-TL
D3242	8-719-989-01	s	DIODE DA221-TL
D3243	8-719-989-01	s	DIODE DA221-TL
D3244	8-719-989-01	s	DIODE DA221-TL
D3245	8-719-989-01	s	DIODE DA221-TL
D3246	8-719-989-01	s	DIODE DA221-TL
D3247	8-719-989-01	s	DIODE DA221-TL
D3248	8-719-989-01	s	DIODE DA221-TL
D3249	8-719-989-01	s	DIODE DA221-TL
D3501	8-719-989-01	s	DIODE DA221-TL
D3502	8-719-989-01	s	DIODE DA221-TL
D3503	8-719-989-01	s	DIODE DA221-TL
D3504	8-719-989-01	s	DIODE DA221-TL
D3505	8-719-989-01	s	DIODE DA221-TL
D3506	8-719-989-01	s	DIODE DA221-TL
D3507	8-719-989-01	s	DIODE DA221-TL
D3508	8-719-989-01	s	DIODE DA221-TL
D3509	8-719-989-01	s	DIODE DA221-TL
D3510	8-719-989-01	s	DIODE DA221-TL
D3511	8-719-989-01	s	DIODE DA221-TL
D3512	8-719-989-01	s	DIODE DA221-TL
D3513	8-719-989-01	s	DIODE DA221-TL
D3514	8-719-989-01	s	DIODE DA221-TL
D3515	8-719-989-01	s	DIODE DA221-TL
D3516	8-719-989-01	s	DIODE DA221-TL
D3517	8-719-989-01	s	DIODE DA221-TL
D3518	8-719-989-01	s	DIODE DA221-TL
D3519	8-719-989-01	s	DIODE DA221-TL
D3520	8-719-989-01	s	DIODE DA221-TL
D3521	8-719-989-01	s	DIODE DA221-TL
D3522	8-719-989-01	s	DIODE DA221-TL
D3523	8-719-989-01	s	DIODE DA221-TL
D3524	8-719-989-01	s	DIODE DA221-TL
D3525	8-719-989-01	s	DIODE DA221-TL
D3526	8-719-989-01	s	DIODE DA221-TL
D3527	8-719-989-01	s	DIODE DA221-TL
D3528	8-719-989-01	s	DIODE DA221-TL
D3529	8-719-989-01	s	DIODE DA221-TL
D3530	8-719-989-01	s	DIODE DA221-TL
D3601	6-502-197-01	s	DI SML-D12M8WT86SM
D3602	6-502-197-01	s	DI SML-D12M8WT86SM
D3603	6-502-197-01	s	DI SML-D12M8WT86SM
D3604	6-502-197-01	s	DI SML-D12M8WT86SM
D3605	6-502-352-01	s	DI SML-522MU8WT86PQ
D3606	6-501-436-01	s	DIODE SML412BC6TT86
D3607	6-502-352-01	s	DI SML-522MU8WT86PQ
D3701	6-502-197-01	s	DI SML-D12M8WT86SM
D3702	6-502-197-01	s	DI SML-D12M8WT86SM
D3703	6-502-197-01	s	DI SML-D12M8WT86SM
D3704	6-502-197-01	s	DI SML-D12M8WT86SM
D4101	6-502-197-01	s	DI SML-D12M8WT86SM
D4102	6-502-197-01	s	DI SML-D12M8WT86SM
D4103	6-502-197-01	s	DI SML-D12M8WT86SM
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
E19	1-535-877-22	s	CHIP, CHECKER
E20	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
E22	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2505	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2803	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2804	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2805	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4103	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4104	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4105	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	8-759-437-39	s	IC MB3771PF-ER
IC202	8-759-338-95	s	IC NJM2903V(TE2)
IC203	8-759-338-95	s	IC NJM2903V(TE2)
IC204	8-759-338-95	s	IC NJM2903V(TE2)
IC305	6-707-862-01	s	IC TC74VHC05FT(EKJ)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
IC306	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC401	6-708-324-01	s	IC R3112N301A-TR-FA
IC402	6-708-324-01	s	IC R3112N301A-TR-FA
IC410	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC411	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC412	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC413	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC501	8-759-831-52	s	IC TC7WH125FK
IC502	8-759-831-52	s	IC TC7WH125FK
IC601	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC602	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC603	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC604	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC605	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC606	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC701	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC702	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC703	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC704	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC705	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC706	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC707	6-712-872-01	s	IC SN65LVDS31PWR
IC801	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC802	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC901	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC904	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC905	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC906	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC907	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC908	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1002	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1003	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1102	6-712-872-01	s	IC SN65LVDS31PWR
IC1103	6-712-872-01	s	IC SN65LVDS31PWR
IC1104	6-712-872-01	s	IC SN65LVDS31PWR
IC1105	6-712-872-01	s	IC SN65LVDS31PWR
IC1106	6-712-872-01	s	IC SN65LVDS31PWR
IC1107	6-712-872-01	s	IC SN65LVDS31PWR
IC1108	6-712-872-01	s	IC SN65LVDS31PWR
IC1109	6-712-872-01	s	IC SN65LVDS31PWR
IC1110	6-712-872-01	s	IC SN65LVDS31PWR
IC1111	6-712-872-01	s	IC SN65LVDS31PWR
IC1112	6-712-872-01	s	IC SN65LVDS31PWR
IC1113	6-712-872-01	s	IC SN65LVDS31PWR
IC1114	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC1207	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1208	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1503	8-759-388-62	s	IC NJU7062M(TE2)
IC2202	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2203	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2204	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2205	6-705-514-01	s	IC MAX3222IPWR
IC2206	6-705-514-01	s	IC MAX3222IPWR
IC2302	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2303	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2304	6-712-526-01	s	IC CAT24C32WI-GT3(E)
IC2305	6-705-514-01	s	IC MAX3222IPWR
IC2306	6-705-514-01	s	IC MAX3222IPWR
IC2402	8-759-598-44	s	IC TC7WH08FK

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
IC2403	8-759-831-52	s	IC TC7WH125FK
IC2404	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2405	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2502	8-759-598-44	s	IC TC7WH08FK
IC2503	8-759-831-52	s	IC TC7WH125FK
IC2504	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2505	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC2701	6-714-188-01	s	IC 88E6131-B2-LAR1C000
IC2901	6-714-188-01	s	IC 88E6131-B2-LAR1C000
IC3232	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3233	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3234	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3235	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3301	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC3302	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC3401	8-759-644-10	s	IC MAX3491CSD+TG068
IC3402	8-759-644-10	s	IC MAX3491CSD+TG068
IC3403	8-759-644-10	s	IC MAX3491CSD+TG068
IC3404	8-759-644-10	s	IC MAX3491CSD+TG068
IC3409	6-707-858-01	s	IC TC74VHC00FT(EKJ)
IC3410	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC3502	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3503	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3504	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3505	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3506	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3507	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3601	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC3603	8-759-437-39	s	IC MB3771PF-ER
IC3801	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3802	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3803	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3903	6-710-018-01	s	IC CAT24C02WI-GT3
IC3904	6-714-192-01	s	IC ADT75BRMZ-REEL
IC3907	6-705-514-01	s	IC MAX3222IPWR
IC4104	8-759-831-52	s	IC TC7WH125FK
IC4105	8-759-598-44	s	IC TC7WH08FK
L301	1-416-511-21	s	COIL, CHOKE 47.0UH
L1201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
PS301	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS3901	⚠ 1-576-124-21	s	LINK, IC (1A/72V)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q213	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q214	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q801	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q1001	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1002	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1201	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q3501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3505	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3605	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3606	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3607	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3608	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3609	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3610	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3611	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3612	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3613	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3614	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3615	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3616	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q4201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4213	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4214	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4215	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4216	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4217	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4218	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4219	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4220	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-935-81	s	RES, CHIP 100K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-903-81	s	RES, CHIP 4.7K (1005)
R209	1-208-895-81	s	RES, CHIP 2.2K (1005)
R210	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-935-81	s	RES, CHIP 100K (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R219	1-208-919-81	s	RES, CHIP 22K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-895-81	s	RES, CHIP 2.2K (1005)
R225	1-208-919-81	s	RES, CHIP 22K (1005)
R226	1-208-911-81	s	RES, CHIP 10K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-919-81	s	RES, CHIP 22K (1005)
R230	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-208-911-81	s	RES, CHIP 10K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R233	1-208-895-81	s	RES, CHIP 2.2K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-208-911-81	s	RES, CHIP 10K (1005)
R239	1-208-903-81	s	RES, CHIP 4.7K (1005)
R240	1-208-895-81	s	RES, CHIP 2.2K (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-208-927-81	s	RES, CHIP 47K (1005)
R246	1-208-927-81	s	RES, CHIP 47K (1005)
R247	1-208-927-81	s	RES, CHIP 47K (1005)
R248	1-208-927-81	s	RES, CHIP 47K (1005)
R249	1-208-927-81	s	RES, CHIP 47K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)
R253	1-208-919-81	s	RES, CHIP 22K (1005)
R254	1-208-887-81	s	RES, CHIP 1.0K (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-903-81	s	RES, CHIP 4.7K (1005)
R258	1-208-935-81	s	RES, CHIP 100K (1005)
R259	1-208-935-81	s	RES, CHIP 100K (1005)
R260	1-208-919-81	s	RES, CHIP 22K (1005)
R261	1-208-879-81	s	RES, CHIP 470 (1005)
R262	1-208-895-81	s	RES, CHIP 2.2K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-895-81	s	RES, CHIP 2.2K (1005)
R265	1-208-911-81	s	RES, CHIP 10K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-911-81	s	RES, CHIP 10K (1005)
R268	1-208-903-81	s	RES, CHIP 4.7K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R272	1-208-903-81	s	RES, CHIP 4.7K (1005)
R273	1-208-919-81	s	RES, CHIP 22K (1005)
R274	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-927-81	s	RES, CHIP 47K (1005)
R302	1-208-927-81	s	RES, CHIP 47K (1005)
R303	1-208-927-81	s	RES, CHIP 47K (1005)
R304	1-208-895-81	s	RES, CHIP 2.2K (1005)
R305	1-208-895-81	s	RES, CHIP 2.2K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-895-81	s	RES, CHIP 2.2K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-895-81	s	RES, CHIP 2.2K (1005)
R311	1-208-951-81	s	RES, CHIP 470K (1005)
R312	1-208-951-81	s	RES, CHIP 470K (1005)
R313	1-208-951-81	s	RES, CHIP 470K (1005)
R314	1-208-951-81	s	RES, CHIP 470K (1005)
R315	1-208-951-81	s	RES, CHIP 470K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R319	1-208-927-81	s	RES, CHIP 47K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-903-81	s	RES, CHIP 4.7K (1005)
R322	1-208-919-81	s	RES, CHIP 22K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-903-81	s	RES, CHIP 4.7K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-208-951-81	s	RES, CHIP 470K (1005)
R406	1-208-951-81	s	RES, CHIP 470K (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-220-878-81	s	RES, CHIP 22 (1005)
R502	1-220-878-81	s	RES, CHIP 22 (1005)
R503	1-220-878-81	s	RES, CHIP 22 (1005)
R505	1-208-911-81	s	RES, CHIP 10K (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R701	1-208-860-81	s	RES, CHIP 75 (1005)
R702	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-208-911-81	s	RES, CHIP 10K (1005)
R832	1-208-887-81	s	RES, CHIP 1.0K (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-911-81	s	RES, CHIP 10K (1005)
R1002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1003	1-208-879-81	s	RES, CHIP 470 (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1008	1-208-879-81	s	RES, CHIP 470 (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1013	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1101	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1102	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1108	1-208-860-81	s	RES, CHIP 75 (1005)
R1109	1-208-860-81	s	RES, CHIP 75 (1005)
R1110	1-208-860-81	s	RES, CHIP 75 (1005)
R1111	1-208-860-81	s	RES, CHIP 75 (1005)
R1112	1-208-860-81	s	RES, CHIP 75 (1005)
R1113	1-208-860-81	s	RES, CHIP 75 (1005)
R1114	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-220-878-81	s	RES, CHIP 22 (1005)
R1203	1-208-911-81	s	RES, CHIP 10K (1005)
R1206	1-220-878-81	s	RES, CHIP 22 (1005)
R1208	1-208-911-81	s	RES, CHIP 10K (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)
R1212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1220	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1228	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-220-878-81	s	RES, CHIP 22 (1005)
R1230	1-220-878-81	s	RES, CHIP 22 (1005)
R1231	1-220-878-81	s	RES, CHIP 22 (1005)
R1232	1-208-879-81	s	RES, CHIP 470 (1005)
R1233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1234	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1236	1-208-879-81	s	RES, CHIP 470 (1005)
R1237	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1238	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1239	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1242	1-220-878-81	s	RES, CHIP 22 (1005)
R1243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1244	1-208-863-81	s	RES, CHIP 100 (1005)
R1245	1-208-863-81	s	RES, CHIP 100 (1005)
R1247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1248	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1256	1-208-879-81	s	RES, CHIP 470 (1005)
R1257	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1266	1-208-911-81	s	RES, CHIP 10K (1005)
R1268	1-208-911-81	s	RES, CHIP 10K (1005)
R1270	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-855-81	s	RES, CHIP 47 (1005)
R1302	1-220-878-81	s	RES, CHIP 22 (1005)
R1303	1-220-882-81	s	RES, CHIP 33 (1005)
R1304	1-220-882-81	s	RES, CHIP 33 (1005)
R1305	1-220-882-81	s	RES, CHIP 33 (1005)
R1306	1-220-882-81	s	RES, CHIP 33 (1005)
R1307	1-220-882-81	s	RES, CHIP 33 (1005)
R1308	1-220-882-81	s	RES, CHIP 33 (1005)
R1401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-208-863-81	s	RES, CHIP 100 (1005)
R1504	1-208-856-81	s	RES, CHIP 51 (1005)
R1505	1-208-856-81	s	RES, CHIP 51 (1005)
R1506	1-208-856-81	s	RES, CHIP 51 (1005)
R1507	1-208-856-81	s	RES, CHIP 51 (1005)
R1508	1-208-856-81	s	RES, CHIP 51 (1005)
R1509	1-208-856-81	s	RES, CHIP 51 (1005)
R1510	1-208-911-81	s	RES, CHIP 10K (1005)
R1511	1-208-911-81	s	RES, CHIP 10K (1005)
R1512	1-208-855-81	s	RES, CHIP 47 (1005)
R1513	1-208-855-81	s	RES, CHIP 47 (1005)
R1516	1-208-863-81	s	RES, CHIP 100 (1005)
R1517	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1518	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1519	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1520	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1801	1-220-882-81	s	RES, CHIP 33 (1005)
R1803	1-220-882-81	s	RES, CHIP 33 (1005)
R1804	1-220-882-81	s	RES, CHIP 33 (1005)
R1805	1-220-882-81	s	RES, CHIP 33 (1005)
R1806	1-220-882-81	s	RES, CHIP 33 (1005)
R1807	1-220-882-81	s	RES, CHIP 33 (1005)
R1808	1-220-882-81	s	RES, CHIP 33 (1005)
R1809	1-220-882-81	s	RES, CHIP 33 (1005)
R1810	1-220-882-81	s	RES, CHIP 33 (1005)
R1811	1-220-882-81	s	RES, CHIP 33 (1005)
R1812	1-220-882-81	s	RES, CHIP 33 (1005)
R1817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1901	1-220-882-81	s	RES, CHIP 33 (1005)
R1903	1-220-882-81	s	RES, CHIP 33 (1005)
R1904	1-220-882-81	s	RES, CHIP 33 (1005)
R1905	1-220-882-81	s	RES, CHIP 33 (1005)
R1906	1-220-882-81	s	RES, CHIP 33 (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1907	1-220-882-81	s	RES, CHIP 33 (1005)
R1908	1-220-882-81	s	RES, CHIP 33 (1005)
R1909	1-220-882-81	s	RES, CHIP 33 (1005)
R1910	1-220-882-81	s	RES, CHIP 33 (1005)
R1911	1-220-882-81	s	RES, CHIP 33 (1005)
R1912	1-220-882-81	s	RES, CHIP 33 (1005)
R1917	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2001	1-208-855-81	s	RES, CHIP 47 (1005)
R2002	1-208-855-81	s	RES, CHIP 47 (1005)
R2003	1-208-855-81	s	RES, CHIP 47 (1005)
R2004	1-208-855-81	s	RES, CHIP 47 (1005)
R2005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2007	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-208-855-81	s	RES, CHIP 47 (1005)
R2009	1-208-855-81	s	RES, CHIP 47 (1005)
R2010	1-208-855-81	s	RES, CHIP 47 (1005)
R2011	1-208-935-81	s	RES, CHIP 100K (1005)
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-855-81	s	RES, CHIP 47 (1005)
R2014	1-208-855-81	s	RES, CHIP 47 (1005)
R2015	1-208-855-81	s	RES, CHIP 47 (1005)
R2016	1-208-874-81	s	RES, CHIP 300 (1005)
R2017	1-208-935-81	s	RES, CHIP 100K (1005)
R2018	1-208-855-81	s	RES, CHIP 47 (1005)
R2019	1-208-855-81	s	RES, CHIP 47 (1005)
R2020	1-208-855-81	s	RES, CHIP 47 (1005)
R2021	1-208-855-81	s	RES, CHIP 47 (1005)
R2022	1-208-855-81	s	RES, CHIP 47 (1005)
R2023	1-208-855-81	s	RES, CHIP 47 (1005)
R2024	1-208-855-81	s	RES, CHIP 47 (1005)
R2025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2026	1-220-878-81	s	RES, CHIP 22 (1005)
R2027	1-220-878-81	s	RES, CHIP 22 (1005)
R2028	1-208-874-81	s	RES, CHIP 300 (1005)
R2029	1-208-855-81	s	RES, CHIP 47 (1005)
R2030	1-208-855-81	s	RES, CHIP 47 (1005)
R2031	1-208-855-81	s	RES, CHIP 47 (1005)
R2032	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-208-855-81	s	RES, CHIP 47 (1005)
R2109	1-208-855-81	s	RES, CHIP 47 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-935-81	s	RES, CHIP 100K (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-855-81	s	RES, CHIP 47 (1005)
R2114	1-208-855-81	s	RES, CHIP 47 (1005)
R2115	1-208-855-81	s	RES, CHIP 47 (1005)
R2116	1-208-874-81	s	RES, CHIP 300 (1005)
R2117	1-208-935-81	s	RES, CHIP 100K (1005)
R2118	1-208-855-81	s	RES, CHIP 47 (1005)
R2119	1-208-855-81	s	RES, CHIP 47 (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R2120	1-208-855-81	s	RES, CHIP 47 (1005)
R2121	1-208-855-81	s	RES, CHIP 47 (1005)
R2122	1-208-855-81	s	RES, CHIP 47 (1005)
R2123	1-208-855-81	s	RES, CHIP 47 (1005)
R2124	1-208-855-81	s	RES, CHIP 47 (1005)
R2125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2126	1-220-878-81	s	RES, CHIP 22 (1005)
R2127	1-220-878-81	s	RES, CHIP 22 (1005)
R2128	1-208-874-81	s	RES, CHIP 300 (1005)
R2129	1-208-855-81	s	RES, CHIP 47 (1005)
R2130	1-208-855-81	s	RES, CHIP 47 (1005)
R2131	1-208-855-81	s	RES, CHIP 47 (1005)
R2132	1-208-855-81	s	RES, CHIP 47 (1005)
R2201	1-220-882-81	s	RES, CHIP 33 (1005)
R2202	1-220-882-81	s	RES, CHIP 33 (1005)
R2203	1-220-882-81	s	RES, CHIP 33 (1005)
R2204	1-220-882-81	s	RES, CHIP 33 (1005)
R2205	1-220-882-81	s	RES, CHIP 33 (1005)
R2206	1-220-882-81	s	RES, CHIP 33 (1005)
R2207	1-220-882-81	s	RES, CHIP 33 (1005)
R2208	1-220-882-81	s	RES, CHIP 33 (1005)
R2209	1-220-882-81	s	RES, CHIP 33 (1005)
R2210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2215	1-208-860-81	s	RES, CHIP 75 (1005)
R2217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2218	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2219	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2220	1-208-919-81	s	RES, CHIP 22K (1005)
R2221	1-220-878-81	s	RES, CHIP 22 (1005)
R2222	1-220-882-81	s	RES, CHIP 33 (1005)
R2223	1-220-882-81	s	RES, CHIP 33 (1005)
R2224	1-220-882-81	s	RES, CHIP 33 (1005)
R2225	1-220-882-81	s	RES, CHIP 33 (1005)
R2226	1-220-882-81	s	RES, CHIP 33 (1005)
R2227	1-220-882-81	s	RES, CHIP 33 (1005)
R2228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2301	1-220-882-81	s	RES, CHIP 33 (1005)
R2302	1-220-882-81	s	RES, CHIP 33 (1005)
R2303	1-220-882-81	s	RES, CHIP 33 (1005)
R2304	1-220-882-81	s	RES, CHIP 33 (1005)
R2305	1-220-882-81	s	RES, CHIP 33 (1005)
R2306	1-220-882-81	s	RES, CHIP 33 (1005)
R2307	1-220-882-81	s	RES, CHIP 33 (1005)
R2308	1-220-882-81	s	RES, CHIP 33 (1005)
R2309	1-220-882-81	s	RES, CHIP 33 (1005)
R2310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2315	1-208-860-81	s	RES, CHIP 75 (1005)
R2317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2319	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2320	1-208-919-81	s	RES, CHIP 22K (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R2321	1-220-878-81	s	RES, CHIP 22 (1005)
R2322	1-220-882-81	s	RES, CHIP 33 (1005)
R2323	1-220-882-81	s	RES, CHIP 33 (1005)
R2324	1-220-882-81	s	RES, CHIP 33 (1005)
R2325	1-220-882-81	s	RES, CHIP 33 (1005)
R2326	1-220-882-81	s	RES, CHIP 33 (1005)
R2327	1-220-882-81	s	RES, CHIP 33 (1005)
R2328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2403	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2406	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2409	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2411	1-208-856-81	s	RES, CHIP 51 (1005)
R2412	1-208-856-81	s	RES, CHIP 51 (1005)
R2413	1-208-927-81	s	RES, CHIP 47K (1005)
R2415	1-208-856-81	s	RES, CHIP 51 (1005)
R2416	1-208-856-81	s	RES, CHIP 51 (1005)
R2417	1-208-856-81	s	RES, CHIP 51 (1005)
R2418	1-208-856-81	s	RES, CHIP 51 (1005)
R2419	1-208-856-81	s	RES, CHIP 51 (1005)
R2420	1-208-856-81	s	RES, CHIP 51 (1005)
R2421	1-208-856-81	s	RES, CHIP 51 (1005)
R2422	1-208-856-81	s	RES, CHIP 51 (1005)
R2423	1-208-959-81	s	RES, CHIP 1M (1005)
R2424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2425	1-208-871-81	s	RES, CHIP 220 (1005)
R2426	1-208-871-81	s	RES, CHIP 220 (1005)
R2427	1-208-871-81	s	RES, CHIP 220 (1005)
R2428	1-208-871-81	s	RES, CHIP 220 (1005)
R2429	1-208-871-81	s	RES, CHIP 220 (1005)
R2430	1-208-871-81	s	RES, CHIP 220 (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2432	1-208-860-81	s	RES, CHIP 75 (1005)
R2503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2504	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2506	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2507	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2508	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2509	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2510	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2511	1-208-856-81	s	RES, CHIP 51 (1005)
R2512	1-208-856-81	s	RES, CHIP 51 (1005)
R2513	1-208-927-81	s	RES, CHIP 47K (1005)
R2515	1-208-856-81	s	RES, CHIP 51 (1005)
R2516	1-208-856-81	s	RES, CHIP 51 (1005)
R2517	1-208-856-81	s	RES, CHIP 51 (1005)
R2518	1-208-856-81	s	RES, CHIP 51 (1005)
R2519	1-208-856-81	s	RES, CHIP 51 (1005)
R2520	1-208-856-81	s	RES, CHIP 51 (1005)
R2521	1-208-856-81	s	RES, CHIP 51 (1005)
R2522	1-208-856-81	s	RES, CHIP 51 (1005)
R2523	1-208-959-81	s	RES, CHIP 1M (1005)
R2524	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2525	1-208-871-81	s	RES, CHIP 220 (1005)
R2526	1-208-871-81	s	RES, CHIP 220 (1005)
R2527	1-208-871-81	s	RES, CHIP 220 (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R2528	1-208-871-81	s	RES, CHIP 220 (1005)
R2529	1-208-871-81	s	RES, CHIP 220 (1005)
R2530	1-208-871-81	s	RES, CHIP 220 (1005)
R2531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2532	1-208-860-81	s	RES, CHIP 75 (1005)
R2701	1-220-878-81	s	RES, CHIP 22 (1005)
R2702	1-220-878-81	s	RES, CHIP 22 (1005)
R2703	1-220-878-81	s	RES, CHIP 22 (1005)
R2704	1-220-878-81	s	RES, CHIP 22 (1005)
R2705	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2706	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2707	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2709	1-208-959-81	s	RES, CHIP 1M (1005)
R2710	1-208-911-81	s	RES, CHIP 10K (1005)
R2711	1-208-911-81	s	RES, CHIP 10K (1005)
R2712	1-208-879-81	s	RES, CHIP 470 (1005)
R2713	1-208-879-81	s	RES, CHIP 470 (1005)
R2714	1-208-879-81	s	RES, CHIP 470 (1005)
R2715	1-208-879-81	s	RES, CHIP 470 (1005)
R2716	1-208-879-81	s	RES, CHIP 470 (1005)
R2717	1-208-879-81	s	RES, CHIP 470 (1005)
R2718	1-208-879-81	s	RES, CHIP 470 (1005)
R2719	1-208-879-81	s	RES, CHIP 470 (1005)
R2720	1-208-879-81	s	RES, CHIP 470 (1005)
R2801	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2802	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2804	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2805	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2806	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2808	1-208-911-81	s	RES, CHIP 10K (1005)
R2809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2814	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2815	1-208-856-81	s	RES, CHIP 51 (1005)
R2816	1-208-856-81	s	RES, CHIP 51 (1005)
R2817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2824	1-208-911-81	s	RES, CHIP 10K (1005)
R2825	1-208-959-81	s	RES, CHIP 1M (1005)
R2826	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2827	1-208-871-81	s	RES, CHIP 220 (1005)
R2828	1-208-871-81	s	RES, CHIP 220 (1005)
R2829	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2830	1-208-871-81	s	RES, CHIP 220 (1005)
R2831	1-208-856-81	s	RES, CHIP 51 (1005)
R2832	1-208-856-81	s	RES, CHIP 51 (1005)
R2833	1-208-856-81	s	RES, CHIP 51 (1005)
R2834	1-208-856-81	s	RES, CHIP 51 (1005)
R2835	1-208-856-81	s	RES, CHIP 51 (1005)
R2836	1-208-856-81	s	RES, CHIP 51 (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R2837	1-208-856-81	s	RES, CHIP 51 (1005)
R2838	1-208-856-81	s	RES, CHIP 51 (1005)
R2839	1-208-860-81	s	RES, CHIP 75 (1005)
R2840	1-208-860-81	s	RES, CHIP 75 (1005)
R2841	1-208-860-81	s	RES, CHIP 75 (1005)
R2842	1-208-860-81	s	RES, CHIP 75 (1005)
R2901	1-220-878-81	s	RES, CHIP 22 (1005)
R2902	1-220-878-81	s	RES, CHIP 22 (1005)
R2903	1-220-878-81	s	RES, CHIP 22 (1005)
R2904	1-220-878-81	s	RES, CHIP 22 (1005)
R2905	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2906	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2907	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2909	1-208-959-81	s	RES, CHIP 1M (1005)
R2910	1-208-911-81	s	RES, CHIP 10K (1005)
R2911	1-208-911-81	s	RES, CHIP 10K (1005)
R2912	1-208-879-81	s	RES, CHIP 470 (1005)
R2913	1-208-879-81	s	RES, CHIP 470 (1005)
R2914	1-208-879-81	s	RES, CHIP 470 (1005)
R2915	1-208-879-81	s	RES, CHIP 470 (1005)
R2916	1-208-879-81	s	RES, CHIP 470 (1005)
R2917	1-208-879-81	s	RES, CHIP 470 (1005)
R2918	1-208-879-81	s	RES, CHIP 470 (1005)
R2919	1-208-879-81	s	RES, CHIP 470 (1005)
R2920	1-208-879-81	s	RES, CHIP 470 (1005)
R3002	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3101	1-208-856-81	s	RES, CHIP 51 (1005)
R3102	1-208-856-81	s	RES, CHIP 51 (1005)
R3103	1-208-856-81	s	RES, CHIP 51 (1005)
R3104	1-208-856-81	s	RES, CHIP 51 (1005)
R3105	1-208-856-81	s	RES, CHIP 51 (1005)
R3106	1-208-856-81	s	RES, CHIP 51 (1005)
R3107	1-208-856-81	s	RES, CHIP 51 (1005)
R3108	1-208-856-81	s	RES, CHIP 51 (1005)
R3109	1-208-856-81	s	RES, CHIP 51 (1005)
R3110	1-208-856-81	s	RES, CHIP 51 (1005)
R3111	1-208-856-81	s	RES, CHIP 51 (1005)
R3112	1-208-856-81	s	RES, CHIP 51 (1005)
R3113	1-208-856-81	s	RES, CHIP 51 (1005)
R3114	1-208-856-81	s	RES, CHIP 51 (1005)
R3115	1-208-856-81	s	RES, CHIP 51 (1005)
R3116	1-208-856-81	s	RES, CHIP 51 (1005)
R3117	1-208-856-81	s	RES, CHIP 51 (1005)
R3118	1-208-856-81	s	RES, CHIP 51 (1005)
R3119	1-208-856-81	s	RES, CHIP 51 (1005)
R3120	1-208-856-81	s	RES, CHIP 51 (1005)
R3121	1-208-856-81	s	RES, CHIP 51 (1005)
R3122	1-208-856-81	s	RES, CHIP 51 (1005)
R3123	1-208-856-81	s	RES, CHIP 51 (1005)
R3124	1-208-856-81	s	RES, CHIP 51 (1005)
R3125	1-208-860-81	s	RES, CHIP 75 (1005)
R3126	1-208-860-81	s	RES, CHIP 75 (1005)
R3127	1-208-860-81	s	RES, CHIP 75 (1005)
R3128	1-208-860-81	s	RES, CHIP 75 (1005)
R3129	1-208-860-81	s	RES, CHIP 75 (1005)
R3130	1-208-860-81	s	RES, CHIP 75 (1005)
R3131	1-208-860-81	s	RES, CHIP 75 (1005)
R3132	1-208-860-81	s	RES, CHIP 75 (1005)
R3133	1-208-860-81	s	RES, CHIP 75 (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R3134	1-208-860-81	s	RES, CHIP 75 (1005)
R3135	1-208-860-81	s	RES, CHIP 75 (1005)
R3136	1-208-860-81	s	RES, CHIP 75 (1005)
R3137	1-208-856-81	s	RES, CHIP 51 (1005)
R3138	1-208-856-81	s	RES, CHIP 51 (1005)
R3139	1-208-856-81	s	RES, CHIP 51 (1005)
R3140	1-208-856-81	s	RES, CHIP 51 (1005)
R3141	1-208-856-81	s	RES, CHIP 51 (1005)
R3142	1-208-856-81	s	RES, CHIP 51 (1005)
R3143	1-208-856-81	s	RES, CHIP 51 (1005)
R3144	1-208-856-81	s	RES, CHIP 51 (1005)
R3145	1-208-856-81	s	RES, CHIP 51 (1005)
R3146	1-208-856-81	s	RES, CHIP 51 (1005)
R3147	1-208-856-81	s	RES, CHIP 51 (1005)
R3148	1-208-856-81	s	RES, CHIP 51 (1005)
R3149	1-208-856-81	s	RES, CHIP 51 (1005)
R3150	1-208-856-81	s	RES, CHIP 51 (1005)
R3151	1-208-856-81	s	RES, CHIP 51 (1005)
R3152	1-208-856-81	s	RES, CHIP 51 (1005)
R3153	1-208-856-81	s	RES, CHIP 51 (1005)
R3154	1-208-856-81	s	RES, CHIP 51 (1005)
R3155	1-208-856-81	s	RES, CHIP 51 (1005)
R3156	1-208-856-81	s	RES, CHIP 51 (1005)
R3157	1-208-856-81	s	RES, CHIP 51 (1005)
R3158	1-208-856-81	s	RES, CHIP 51 (1005)
R3159	1-208-856-81	s	RES, CHIP 51 (1005)
R3160	1-208-856-81	s	RES, CHIP 51 (1005)
R3161	1-208-860-81	s	RES, CHIP 75 (1005)
R3162	1-208-860-81	s	RES, CHIP 75 (1005)
R3163	1-208-860-81	s	RES, CHIP 75 (1005)
R3164	1-208-860-81	s	RES, CHIP 75 (1005)
R3165	1-208-860-81	s	RES, CHIP 75 (1005)
R3166	1-208-860-81	s	RES, CHIP 75 (1005)
R3167	1-208-860-81	s	RES, CHIP 75 (1005)
R3168	1-208-860-81	s	RES, CHIP 75 (1005)
R3169	1-208-860-81	s	RES, CHIP 75 (1005)
R3170	1-208-860-81	s	RES, CHIP 75 (1005)
R3171	1-208-860-81	s	RES, CHIP 75 (1005)
R3172	1-208-860-81	s	RES, CHIP 75 (1005)
R3201	1-208-855-81	s	RES, CHIP 47 (1005)
R3202	1-220-878-81	s	RES, CHIP 22 (1005)
R3242	1-208-911-81	s	RES, CHIP 10K (1005)
R3243	1-208-911-81	s	RES, CHIP 10K (1005)
R3303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3405	1-208-863-81	s	RES, CHIP 100 (1005)
R3406	1-208-863-81	s	RES, CHIP 100 (1005)
R3407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3408	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R3411	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3417	1-208-863-81	s	RES, CHIP 100 (1005)
R3418	1-208-863-81	s	RES, CHIP 100 (1005)
R3419	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3420	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3423	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3509	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3510	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3511	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3512	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3513	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3514	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3515	1-208-911-81	s	RES, CHIP 10K (1005)
R3516	1-208-911-81	s	RES, CHIP 10K (1005)
R3517	1-208-863-81	s	RES, CHIP 100 (1005)
R3518	1-208-863-81	s	RES, CHIP 100 (1005)
R3519	1-208-860-81	s	RES, CHIP 75 (1005)
R3520	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3609	1-208-911-81	s	RES, CHIP 10K (1005)
R3611	1-208-911-81	s	RES, CHIP 10K (1005)
R3613	1-208-895-81	s	RES, CHIP 2.2K (1005)
R3614	1-208-911-81	s	RES, CHIP 10K (1005)
R3615	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3617	1-208-911-81	s	RES, CHIP 10K (1005)
R3620	1-208-911-81	s	RES, CHIP 10K (1005)
R3621	1-208-911-81	s	RES, CHIP 10K (1005)
R3622	1-208-911-81	s	RES, CHIP 10K (1005)
R3623	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3635	1-208-875-81	s	RES, CHIP 330 (1005)
R3636	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3637	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3638	1-208-871-81	s	RES, CHIP 220 (1005)
R3639	1-208-871-81	s	RES, CHIP 220 (1005)
R3640	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3641	1-208-871-81	s	RES, CHIP 220 (1005)
R3642	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3643	1-208-911-81	s	RES, CHIP 10K (1005)
R3644	1-208-911-81	s	RES, CHIP 10K (1005)
R3701	1-220-878-81	s	RES, CHIP 22 (1005)
R3702	1-220-878-81	s	RES, CHIP 22 (1005)
R3703	1-220-878-81	s	RES, CHIP 22 (1005)
R3704	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3705	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3706	1-208-856-81	s	RES, CHIP 51 (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R3707	1-208-856-81	s	RES, CHIP 51 (1005)
R3708	1-208-856-81	s	RES, CHIP 51 (1005)
R3709	1-208-879-81	s	RES, CHIP 470 (1005)
R3710	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3711	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3805	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3807	1-220-878-81	s	RES, CHIP 22 (1005)
R3808	1-220-878-81	s	RES, CHIP 22 (1005)
R3809	1-220-878-81	s	RES, CHIP 22 (1005)
R3810	1-220-878-81	s	RES, CHIP 22 (1005)
R3811	1-220-878-81	s	RES, CHIP 22 (1005)
R3812	1-220-878-81	s	RES, CHIP 22 (1005)
R3813	1-220-878-81	s	RES, CHIP 22 (1005)
R3814	1-220-878-81	s	RES, CHIP 22 (1005)
R3815	1-220-878-81	s	RES, CHIP 22 (1005)
R3816	1-220-878-81	s	RES, CHIP 22 (1005)
R3817	1-220-878-81	s	RES, CHIP 22 (1005)
R3818	1-220-878-81	s	RES, CHIP 22 (1005)
R3819	1-220-878-81	s	RES, CHIP 22 (1005)
R3820	1-220-878-81	s	RES, CHIP 22 (1005)
R3821	1-220-878-81	s	RES, CHIP 22 (1005)
R3822	1-220-878-81	s	RES, CHIP 22 (1005)
R3823	1-220-878-81	s	RES, CHIP 22 (1005)
R3824	1-220-878-81	s	RES, CHIP 22 (1005)
R3825	1-220-878-81	s	RES, CHIP 22 (1005)
R3826	1-220-878-81	s	RES, CHIP 22 (1005)
R3835	1-220-878-81	s	RES, CHIP 22 (1005)
R3837	1-220-878-81	s	RES, CHIP 22 (1005)
R3839	1-220-878-81	s	RES, CHIP 22 (1005)
R3844	1-220-878-81	s	RES, CHIP 22 (1005)
R3846	1-220-878-81	s	RES, CHIP 22 (1005)
R3848	1-220-878-81	s	RES, CHIP 22 (1005)
R3853	1-220-878-81	s	RES, CHIP 22 (1005)
R3854	1-220-878-81	s	RES, CHIP 22 (1005)
R3855	1-220-878-81	s	RES, CHIP 22 (1005)
R3861	1-220-878-81	s	RES, CHIP 22 (1005)
R3902	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3903	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3906	1-208-855-81	s	RES, CHIP 47 (1005)
R3907	1-208-855-81	s	RES, CHIP 47 (1005)
R3908	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3914	1-220-882-81	s	RES, CHIP 33 (1005)
R3915	1-220-882-81	s	RES, CHIP 33 (1005)
R3916	1-220-882-81	s	RES, CHIP 33 (1005)
R3917	1-220-882-81	s	RES, CHIP 33 (1005)
R3918	1-208-911-81	s	RES, CHIP 10K (1005)
R3921	1-208-911-81	s	RES, CHIP 10K (1005)
R3923	1-208-911-81	s	RES, CHIP 10K (1005)
R4102	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4103	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R4104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4107	1-208-911-81	s	RES, CHIP 10K (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4114	1-208-856-81	s	RES, CHIP 51 (1005)
R4115	1-208-856-81	s	RES, CHIP 51 (1005)
R4116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4123	1-208-911-81	s	RES, CHIP 10K (1005)
R4124	1-208-959-81	s	RES, CHIP 1M (1005)
R4125	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4126	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4127	1-208-879-81	s	RES, CHIP 470 (1005)
R4128	1-208-879-81	s	RES, CHIP 470 (1005)
R4129	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4130	1-208-879-81	s	RES, CHIP 470 (1005)
R4131	1-208-856-81	s	RES, CHIP 51 (1005)
R4132	1-208-856-81	s	RES, CHIP 51 (1005)
R4133	1-208-856-81	s	RES, CHIP 51 (1005)
R4134	1-208-856-81	s	RES, CHIP 51 (1005)
R4135	1-208-856-81	s	RES, CHIP 51 (1005)
R4136	1-208-856-81	s	RES, CHIP 51 (1005)
R4137	1-208-856-81	s	RES, CHIP 51 (1005)
R4138	1-208-856-81	s	RES, CHIP 51 (1005)
R4139	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4140	1-208-903-81	s	RES, CHIP 4.7K (1005)
RB301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB302	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB402	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB403	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB504	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB508	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB509	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB510	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB511	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB512	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB513	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB514	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB516	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB517	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB518	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB519	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB520	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB521	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB522	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB523	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB524	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB527	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB528	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB529	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB530	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB531	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB532	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB613	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB614	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB615	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB616	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB617	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB618	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB619	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB620	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB621	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB622	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB623	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB624	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB625	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB626	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB627	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB628	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB629	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB630	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB631	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB718	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB719	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB720	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB721	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB722	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB802	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB803	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB804	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB805	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB806	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB807	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB808	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB909	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB910	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB911	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB912	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB914	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB916	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB917	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB918	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB919	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB920	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB921	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1303	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1304	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1702	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1704	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1801	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1802	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1803	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1804	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1805	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1806	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1807	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1808	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1809	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1810	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1811	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1812	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1813	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1814	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1815	1-242-963-21	s	RES, NETWORK 33 (1005X4)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB1816	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1817	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1901	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1902	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1903	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1904	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1905	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1906	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1907	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1908	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1909	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1910	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1911	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1912	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1913	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1914	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1915	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1916	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB1917	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2006	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2007	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2008	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2009	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2010	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2011	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2012	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2018	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2019	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2020	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2021	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2022	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2023	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2024	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2119	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2121	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2122	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2123	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2124	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2202	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2203	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2204	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2205	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2206	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2207	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2301	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2302	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2303	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2304	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2305	1-242-963-21	s	RES, NETWORK 33 (1005X4)
RB2306	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2307	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2706	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB2901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2906	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB3230	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3231	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3232	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3233	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3235	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3236	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3237	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3238	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3239	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3240	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3241	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3242	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3243	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3244	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3245	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3246	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3502	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3503	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3504	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3505	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3506	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3507	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB3508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3509	1-234-372-21	s	RES, NETWORK 100 (1005X4)

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB3510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3511	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3516	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3517	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3518	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3519	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3520	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3521	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3522	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3523	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3524	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3601	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3602	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3603	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3604	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3605	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3606	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3607	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3609	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3610	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3611	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3909	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3910	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3911	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3912	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3914	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3916	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3920	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3921	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3922	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4203	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4204	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4205	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S401	1-771-721-21	s	SWITCH, TACTILE
S402	1-771-721-21	s	SWITCH, TACTILE
S501	1-771-721-21	s	SWITCH, TACTILE
S901	1-692-271-41	s	SWITCH, SLIDE

(CA-82 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
S902	1-692-271-41	s	SWITCH, SLIDE
S903	1-692-271-41	s	SWITCH, SLIDE
S904	1-692-271-41	s	SWITCH, SLIDE
S1301	1-692-271-41	s	SWITCH, SLIDE
S2201	1-771-721-21	s	SWITCH, TACTILE
S2202	1-692-271-41	s	SWITCH, SLIDE
S2301	1-771-721-21	s	SWITCH, TACTILE
S2302	1-692-271-41	s	SWITCH, SLIDE
T2801	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3101	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3102	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3103	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3104	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3105	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3106	1-443-851-21	s	GIGABIT MAGNETIC MODULE
TP219	1-535-877-22	s	CHIP, CHECKER
TP223	1-535-877-22	s	CHIP, CHECKER
TP224	1-535-877-22	s	CHIP, CHECKER
TP225	1-535-877-22	s	CHIP, CHECKER
TP226	1-535-877-22	s	CHIP, CHECKER
TP227	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP304	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP904	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
X801	1-813-493-11	s	OSCILLATOR, CRYSTAL
X1301	1-813-493-11	s	OSCILLATOR, CRYSTAL
X2201	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2301	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2401	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2501	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2701	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2801	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2901	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X3201	1-813-493-11	s	OSCILLATOR, CRYSTAL
X4101	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)

CA-82A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
1pc	7-626-320-61	s	PIN, SPRING 3X18
10pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-137-894-21	s	CAP, CHIP ELECT 470MF
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C204	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C205	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C206	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C207	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C208	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C239	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C241	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C242	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C243	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C244	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C245	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C246	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C247	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C248	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C301	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C304	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C305	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C306	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C307	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C308	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C315	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C323	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C324	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C325	1-116-118-11	s	CAP, ELECT 47MF 105
C326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C327	1-116-118-11	s	CAP, ELECT 47MF 105
C401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C501	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C503	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C620	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C622	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C634	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C636	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C638	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C640	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C642	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C644	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C646	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C728	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C740	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C911	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C933	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C936	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1003	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1004	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1005	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1019	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1042	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1043	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1101	1-116-118-11	s	CAP, ELECT 47MF 105
C1102	1-116-118-11	s	CAP, ELECT 47MF 105
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1132	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1217	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1219	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1222	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1224	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1225	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2701	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2704	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2706	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2713	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2715	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2717	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2722	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2724	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2728	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2730	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2742	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2743	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2744	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2746	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2747	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2748	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2750	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2751	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2752	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2753	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2754	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2755	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2756	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2757	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2758	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2759	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2760	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2801	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2805	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2807	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2811	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2813	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2815	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2817	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2818	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2822	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2823	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2828	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2829	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2830	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2831	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2832	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2834	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2840	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C2901	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2907	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2909	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2910	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2913	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2915	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2917	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2920	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2924	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2925	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2927	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2936	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2937	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2946	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2947	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2948	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2950	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2951	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2952	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2954	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2955	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2956	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2957	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2958	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2959	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2960	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2961	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2962	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2963	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2964	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3114	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3115	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3116	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3117	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3118	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3119	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3120	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3121	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3122	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3123	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3124	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3125	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3129	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3132	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3136	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3149	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3150	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3151	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3176	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3178	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3179	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3181	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3183	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3184	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3185	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3186	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3187	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3188	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3189	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3190	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3191	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3192	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3193	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3194	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3195	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3196	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3197	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3198	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3199	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3213	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3214	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C3233	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3235	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3237	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3239	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3240	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3241	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3242	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3243	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3244	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3245	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3246	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3247	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3248	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3249	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3250	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3251	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3252	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3253	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3301	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3304	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3401	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3403	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3405	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3407	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3501	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3521	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3523	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3525	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3528	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3531	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3541	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3542	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3543	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3546	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3547	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3548	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3550	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3551	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3552	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3553	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3554	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3555	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3601	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3602	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3603	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3605	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3607	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3608	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3609	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3610	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3611	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3612	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3613	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3614	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3615	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3616	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3617	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3618	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3619	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3620	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3621	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3622	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3623	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3624	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3625	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3635	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3636	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C3637	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3639	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3642	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3644	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3646	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3647	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3648	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3649	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3650	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3652	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3653	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3701	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3711	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3713	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3714	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3917	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3929	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3931	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4101	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4104	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4107	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4110	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4117	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4122	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C4123	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C4124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4129	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4130	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4131	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4136	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4137	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1101	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN1102	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN3701	1-815-893-11	s	CONNECTOR, CARD (CFA) 50P
CN3801	1-770-627-21	s	PIN, CONNECTOR 10P
CN3901	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN3902	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN4101	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D201	6-502-197-01	s	DI SML-D12M8WT86SM
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D204	6-502-197-01	s	DI SML-D12M8WT86SM
D205	6-502-197-01	s	DI SML-D12M8WT86SM
D206	6-502-197-01	s	DI SML-D12M8WT86SM
D301	8-719-069-28	s	DI 1SS400FJTE61
D302	8-719-069-28	s	DI 1SS400FJTE61
D303	8-719-069-28	s	DI 1SS400FJTE61
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D309	8-719-069-28	s	DI 1SS400FJTE61
D310	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-598-01	s	DI SML-D12U8WT86
D802	6-502-197-01	s	DI SML-D12M8WT86SM

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM
D805	6-502-197-01	s	DI SML-D12M8WT86SM
D901	6-502-197-01	s	DI SML-D12M8WT86SM
D902	6-502-197-01	s	DI SML-D12M8WT86SM
D903	6-502-197-01	s	DI SML-D12M8WT86SM
D904	6-502-197-01	s	DI SML-D12M8WT86SM
D905	6-502-197-01	s	DI SML-D12M8WT86SM
D906	6-502-197-01	s	DI SML-D12M8WT86SM
D907	6-502-197-01	s	DI SML-D12M8WT86SM
D908	6-502-197-01	s	DI SML-D12M8WT86SM
D909	6-502-197-01	s	DI SML-D12M8WT86SM
D910	6-502-197-01	s	DI SML-D12M8WT86SM
D911	6-502-197-01	s	DI SML-D12M8WT86SM
D912	6-502-197-01	s	DI SML-D12M8WT86SM
D913	6-502-197-01	s	DI SML-D12M8WT86SM
D914	6-502-197-01	s	DI SML-D12M8WT86SM
D915	6-502-197-01	s	DI SML-D12M8WT86SM
D916	6-502-197-01	s	DI SML-D12M8WT86SM
D917	6-502-197-01	s	DI SML-D12M8WT86SM
D918	6-502-197-01	s	DI SML-D12M8WT86SM
D919	6-502-197-01	s	DI SML-D12M8WT86SM
D920	6-502-197-01	s	DI SML-D12M8WT86SM
D1002	8-719-056-65	s	DIODE 1SS372-TE85L
D1101	6-502-197-01	s	DI SML-D12M8WT86SM
D1102	6-502-197-01	s	DI SML-D12M8WT86SM
D2701	6-502-197-01	s	DI SML-D12M8WT86SM
D2702	6-502-197-01	s	DI SML-D12M8WT86SM
D2703	6-502-197-01	s	DI SML-D12M8WT86SM
D2704	6-502-197-01	s	DI SML-D12M8WT86SM
D2705	6-502-197-01	s	DI SML-D12M8WT86SM
D2706	6-502-197-01	s	DI SML-D12M8WT86SM
D2707	6-502-197-01	s	DI SML-D12M8WT86SM
D2708	6-502-197-01	s	DI SML-D12M8WT86SM
D2709	6-502-197-01	s	DI SML-D12M8WT86SM
D2801	6-502-197-01	s	DI SML-D12M8WT86SM
D2802	6-502-197-01	s	DI SML-D12M8WT86SM
D2803	6-502-197-01	s	DI SML-D12M8WT86SM
D2901	6-502-197-01	s	DI SML-D12M8WT86SM
D2902	6-502-197-01	s	DI SML-D12M8WT86SM
D2903	6-502-197-01	s	DI SML-D12M8WT86SM
D2904	6-502-197-01	s	DI SML-D12M8WT86SM
D2905	6-502-197-01	s	DI SML-D12M8WT86SM
D2906	6-502-197-01	s	DI SML-D12M8WT86SM
D2907	6-502-197-01	s	DI SML-D12M8WT86SM
D2908	6-502-197-01	s	DI SML-D12M8WT86SM
D2909	6-502-197-01	s	DI SML-D12M8WT86SM
D3234	8-719-989-01	s	DIODE DA221-TL
D3235	8-719-989-01	s	DIODE DA221-TL
D3236	8-719-989-01	s	DIODE DA221-TL
D3237	8-719-989-01	s	DIODE DA221-TL
D3238	8-719-989-01	s	DIODE DA221-TL
D3239	8-719-989-01	s	DIODE DA221-TL
D3240	8-719-989-01	s	DIODE DA221-TL
D3241	8-719-989-01	s	DIODE DA221-TL
D3242	8-719-989-01	s	DIODE DA221-TL
D3243	8-719-989-01	s	DIODE DA221-TL
D3244	8-719-989-01	s	DIODE DA221-TL
D3245	8-719-989-01	s	DIODE DA221-TL

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D3246	8-719-989-01	s	DIODE DA221-TL
D3247	8-719-989-01	s	DIODE DA221-TL
D3248	8-719-989-01	s	DIODE DA221-TL
D3249	8-719-989-01	s	DIODE DA221-TL
D3501	8-719-989-01	s	DIODE DA221-TL
D3502	8-719-989-01	s	DIODE DA221-TL
D3503	8-719-989-01	s	DIODE DA221-TL
D3504	8-719-989-01	s	DIODE DA221-TL
D3505	8-719-989-01	s	DIODE DA221-TL
D3506	8-719-989-01	s	DIODE DA221-TL
D3507	8-719-989-01	s	DIODE DA221-TL
D3508	8-719-989-01	s	DIODE DA221-TL
D3509	8-719-989-01	s	DIODE DA221-TL
D3510	8-719-989-01	s	DIODE DA221-TL
D3511	8-719-989-01	s	DIODE DA221-TL
D3512	8-719-989-01	s	DIODE DA221-TL
D3513	8-719-989-01	s	DIODE DA221-TL
D3514	8-719-989-01	s	DIODE DA221-TL
D3515	8-719-989-01	s	DIODE DA221-TL
D3516	8-719-989-01	s	DIODE DA221-TL
D3517	8-719-989-01	s	DIODE DA221-TL
D3518	8-719-989-01	s	DIODE DA221-TL
D3519	8-719-989-01	s	DIODE DA221-TL
D3520	8-719-989-01	s	DIODE DA221-TL
D3521	8-719-989-01	s	DIODE DA221-TL
D3522	8-719-989-01	s	DIODE DA221-TL
D3523	8-719-989-01	s	DIODE DA221-TL
D3524	8-719-989-01	s	DIODE DA221-TL
D3525	8-719-989-01	s	DIODE DA221-TL
D3526	8-719-989-01	s	DIODE DA221-TL
D3527	8-719-989-01	s	DIODE DA221-TL
D3528	8-719-989-01	s	DIODE DA221-TL
D3529	8-719-989-01	s	DIODE DA221-TL
D3530	8-719-989-01	s	DIODE DA221-TL
D3601	6-502-197-01	s	DI SML-D12M8WT86SM
D3602	6-502-197-01	s	DI SML-D12M8WT86SM
D3603	6-502-197-01	s	DI SML-D12M8WT86SM
D3604	6-502-197-01	s	DI SML-D12M8WT86SM
D3605	6-502-352-01	s	DI SML-522MU8WT86PQ
D3606	6-501-436-01	s	DIODE SML412BC6TT86
D3607	6-502-352-01	s	DI SML-522MU8WT86PQ
D3701	6-502-197-01	s	DI SML-D12M8WT86SM
D3702	6-502-197-01	s	DI SML-D12M8WT86SM
D3703	6-502-197-01	s	DI SML-D12M8WT86SM
D3704	6-502-197-01	s	DI SML-D12M8WT86SM
D4101	6-502-197-01	s	DI SML-D12M8WT86SM
D4102	6-502-197-01	s	DI SML-D12M8WT86SM
D4103	6-502-197-01	s	DI SML-D12M8WT86SM
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
E19	1-535-877-22	s	CHIP, CHECKER
E20	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
E22	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2803	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2804	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2805	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4103	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4104	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4105	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	8-759-437-39	s	IC MB3771PF-ER
IC202	8-759-338-95	s	IC NJM2903V(TE2)
IC203	8-759-338-95	s	IC NJM2903V(TE2)
IC204	8-759-338-95	s	IC NJM2903V(TE2)
IC305	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC306	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC401	6-708-324-01	s	IC R3112N301A-TR-FA
IC402	6-708-324-01	s	IC R3112N301A-TR-FA
IC410	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC411	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC412	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC413	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC501	8-759-831-52	s	IC TC7WH125FK
IC502	8-759-831-52	s	IC TC7WH125FK
IC601	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC602	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC603	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC604	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC605	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC606	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC701	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC702	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC703	6-715-585-01	s	IC TC74LCX16245(EL,F)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC704	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC705	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC706	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC707	6-712-872-01	s	IC SN65LVDS31PWR
IC801	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC802	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC901	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC904	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC905	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC906	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC907	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC908	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1002	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1003	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1102	6-712-872-01	s	IC SN65LVDS31PWR
IC1103	6-712-872-01	s	IC SN65LVDS31PWR
IC1104	6-712-872-01	s	IC SN65LVDS31PWR
IC1105	6-712-872-01	s	IC SN65LVDS31PWR
IC1106	6-712-872-01	s	IC SN65LVDS31PWR
IC1107	6-712-872-01	s	IC SN65LVDS31PWR
IC1108	6-712-872-01	s	IC SN65LVDS31PWR
IC1109	6-712-872-01	s	IC SN65LVDS31PWR
IC1110	6-712-872-01	s	IC SN65LVDS31PWR
IC1111	6-712-872-01	s	IC SN65LVDS31PWR
IC1112	6-712-872-01	s	IC SN65LVDS31PWR
IC1113	6-712-872-01	s	IC SN65LVDS31PWR
IC1114	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC2701	6-714-188-01	s	IC 88E6131-B2-LAR1C000
IC2901	6-714-188-01	s	IC 88E6131-B2-LAR1C000
IC3232	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3233	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3234	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3235	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC3301	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC3302	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC3401	8-759-644-10	s	IC MAX3491CSD+TG068
IC3402	8-759-644-10	s	IC MAX3491CSD+TG068
IC3403	8-759-644-10	s	IC MAX3491CSD+TG068
IC3404	8-759-644-10	s	IC MAX3491CSD+TG068
IC3409	6-707-858-01	s	IC TC74VHC00FT(EKJ)
IC3410	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC3502	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3503	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3504	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3505	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3506	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3507	6-712-387-01	s	IC TC74VHC165FT(EKJ)
IC3601	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC3603	8-759-437-39	s	IC MB3771PF-ER
IC3801	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3802	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3803	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3903	6-710-018-01	s	IC CAT24C02WI-GT3
IC3904	6-714-192-01	s	IC ADT75BRMZ-REEL
IC3907	6-705-514-01	s	IC MAX3222IPWR
IC4104	8-759-831-52	s	IC TC7WH125FK
IC4105	8-759-598-44	s	IC TC7WH08FK
L301	1-416-511-21	s	COIL, CHOKE 47.0UH

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L2701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
PS301	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS3901	⚠ 1-576-124-21	s	LINK, IC (1A/72V)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q213	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q214	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q801	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q1001	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1002	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q3501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3505	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3605	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3606	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3607	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3608	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3609	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3610	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3611	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3612	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3613	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3614	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3615	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3616	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q4201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4212	8-729-929-09	s	TRANSISTOR DTC123JE-TL

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q4213	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4214	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4215	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4216	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4217	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4218	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4219	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q4220	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-935-81	s	RES, CHIP 100K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-903-81	s	RES, CHIP 4.7K (1005)
R209	1-208-895-81	s	RES, CHIP 2.2K (1005)
R210	1-208-887-81	s	RES, CHIP 1.0K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-935-81	s	RES, CHIP 100K (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R219	1-208-919-81	s	RES, CHIP 22K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-895-81	s	RES, CHIP 2.2K (1005)
R225	1-208-919-81	s	RES, CHIP 22K (1005)
R226	1-208-911-81	s	RES, CHIP 10K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-919-81	s	RES, CHIP 22K (1005)
R230	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-208-911-81	s	RES, CHIP 10K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R233	1-208-895-81	s	RES, CHIP 2.2K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-935-81	s	RES, CHIP 100K (1005)
R237	1-208-911-81	s	RES, CHIP 10K (1005)
R238	1-208-911-81	s	RES, CHIP 10K (1005)
R239	1-208-903-81	s	RES, CHIP 4.7K (1005)
R240	1-208-895-81	s	RES, CHIP 2.2K (1005)
R241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-208-927-81	s	RES, CHIP 47K (1005)
R246	1-208-927-81	s	RES, CHIP 47K (1005)
R247	1-208-927-81	s	RES, CHIP 47K (1005)
R248	1-208-927-81	s	RES, CHIP 47K (1005)
R249	1-208-927-81	s	RES, CHIP 47K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R253	1-208-919-81	s	RES, CHIP 22K (1005)
R254	1-208-887-81	s	RES, CHIP 1.0K (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R257	1-208-903-81	s	RES, CHIP 4.7K (1005)
R258	1-208-935-81	s	RES, CHIP 100K (1005)
R259	1-208-935-81	s	RES, CHIP 100K (1005)
R260	1-208-919-81	s	RES, CHIP 22K (1005)
R261	1-208-879-81	s	RES, CHIP 470 (1005)
R262	1-208-895-81	s	RES, CHIP 2.2K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-895-81	s	RES, CHIP 2.2K (1005)
R265	1-208-911-81	s	RES, CHIP 10K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-911-81	s	RES, CHIP 10K (1005)
R268	1-208-903-81	s	RES, CHIP 4.7K (1005)
R269	1-208-903-81	s	RES, CHIP 4.7K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-903-81	s	RES, CHIP 4.7K (1005)
R272	1-208-903-81	s	RES, CHIP 4.7K (1005)
R273	1-208-919-81	s	RES, CHIP 22K (1005)
R274	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-927-81	s	RES, CHIP 47K (1005)
R302	1-208-927-81	s	RES, CHIP 47K (1005)
R303	1-208-927-81	s	RES, CHIP 47K (1005)
R304	1-208-895-81	s	RES, CHIP 2.2K (1005)
R305	1-208-895-81	s	RES, CHIP 2.2K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-895-81	s	RES, CHIP 2.2K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-895-81	s	RES, CHIP 2.2K (1005)
R311	1-208-951-81	s	RES, CHIP 470K (1005)
R312	1-208-951-81	s	RES, CHIP 470K (1005)
R313	1-208-951-81	s	RES, CHIP 470K (1005)
R314	1-208-951-81	s	RES, CHIP 470K (1005)
R315	1-208-951-81	s	RES, CHIP 470K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R319	1-208-927-81	s	RES, CHIP 47K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-208-951-81	s	RES, CHIP 470K (1005)
R406	1-208-951-81	s	RES, CHIP 470K (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-220-878-81	s	RES, CHIP 22 (1005)
R502	1-220-878-81	s	RES, CHIP 22 (1005)
R503	1-220-878-81	s	RES, CHIP 22 (1005)
R505	1-208-911-81	s	RES, CHIP 10K (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R701	1-208-860-81	s	RES, CHIP 75 (1005)
R702	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-208-911-81	s	RES, CHIP 10K (1005)
R832	1-208-887-81	s	RES, CHIP 1.0K (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-911-81	s	RES, CHIP 10K (1005)
R1002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1003	1-208-879-81	s	RES, CHIP 470 (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1008	1-208-879-81	s	RES, CHIP 470 (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1013	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1101	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1102	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1108	1-208-860-81	s	RES, CHIP 75 (1005)
R1109	1-208-860-81	s	RES, CHIP 75 (1005)
R1110	1-208-860-81	s	RES, CHIP 75 (1005)
R1111	1-208-860-81	s	RES, CHIP 75 (1005)
R1112	1-208-860-81	s	RES, CHIP 75 (1005)
R1113	1-208-860-81	s	RES, CHIP 75 (1005)
R1114	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-220-878-81	s	RES, CHIP 22 (1005)
R1230	1-220-878-81	s	RES, CHIP 22 (1005)
R1231	1-220-878-81	s	RES, CHIP 22 (1005)
R1232	1-208-879-81	s	RES, CHIP 470 (1005)
R1242	1-220-878-81	s	RES, CHIP 22 (1005)
R1243	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1248	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1256	1-208-879-81	s	RES, CHIP 470 (1005)
R1266	1-208-911-81	s	RES, CHIP 10K (1005)
R1268	1-208-911-81	s	RES, CHIP 10K (1005)
R1270	1-208-911-81	s	RES, CHIP 10K (1005)
R2701	1-220-878-81	s	RES, CHIP 22 (1005)
R2702	1-220-878-81	s	RES, CHIP 22 (1005)
R2703	1-220-878-81	s	RES, CHIP 22 (1005)
R2704	1-220-878-81	s	RES, CHIP 22 (1005)
R2705	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2706	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2707	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2709	1-208-959-81	s	RES, CHIP 1M (1005)
R2710	1-208-911-81	s	RES, CHIP 10K (1005)
R2711	1-208-911-81	s	RES, CHIP 10K (1005)
R2712	1-208-879-81	s	RES, CHIP 470 (1005)
R2713	1-208-879-81	s	RES, CHIP 470 (1005)
R2714	1-208-879-81	s	RES, CHIP 470 (1005)
R2715	1-208-879-81	s	RES, CHIP 470 (1005)
R2716	1-208-879-81	s	RES, CHIP 470 (1005)
R2717	1-208-879-81	s	RES, CHIP 470 (1005)
R2718	1-208-879-81	s	RES, CHIP 470 (1005)
R2719	1-208-879-81	s	RES, CHIP 470 (1005)
R2720	1-208-879-81	s	RES, CHIP 470 (1005)
R2801	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2802	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2804	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2805	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2806	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2808	1-208-911-81	s	RES, CHIP 10K (1005)
R2809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2814	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2815	1-208-856-81	s	RES, CHIP 51 (1005)
R2816	1-208-856-81	s	RES, CHIP 51 (1005)
R2817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2824	1-208-911-81	s	RES, CHIP 10K (1005)
R2825	1-208-959-81	s	RES, CHIP 1M (1005)
R2826	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2827	1-208-871-81	s	RES, CHIP 220 (1005)
R2828	1-208-871-81	s	RES, CHIP 220 (1005)
R2829	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2830	1-208-871-81	s	RES, CHIP 220 (1005)
R2831	1-208-856-81	s	RES, CHIP 51 (1005)
R2832	1-208-856-81	s	RES, CHIP 51 (1005)
R2833	1-208-856-81	s	RES, CHIP 51 (1005)
R2834	1-208-856-81	s	RES, CHIP 51 (1005)
R2835	1-208-856-81	s	RES, CHIP 51 (1005)
R2836	1-208-856-81	s	RES, CHIP 51 (1005)
R2837	1-208-856-81	s	RES, CHIP 51 (1005)
R2838	1-208-856-81	s	RES, CHIP 51 (1005)
R2839	1-208-860-81	s	RES, CHIP 75 (1005)
R2840	1-208-860-81	s	RES, CHIP 75 (1005)
R2841	1-208-860-81	s	RES, CHIP 75 (1005)
R2842	1-208-860-81	s	RES, CHIP 75 (1005)
R2901	1-220-878-81	s	RES, CHIP 22 (1005)
R2902	1-220-878-81	s	RES, CHIP 22 (1005)
R2903	1-220-878-81	s	RES, CHIP 22 (1005)
R2904	1-220-878-81	s	RES, CHIP 22 (1005)
R2905	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2906	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2907	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2909	1-208-959-81	s	RES, CHIP 1M (1005)
R2910	1-208-911-81	s	RES, CHIP 10K (1005)
R2911	1-208-911-81	s	RES, CHIP 10K (1005)
R2912	1-208-879-81	s	RES, CHIP 470 (1005)
R2913	1-208-879-81	s	RES, CHIP 470 (1005)
R2914	1-208-879-81	s	RES, CHIP 470 (1005)
R2915	1-208-879-81	s	RES, CHIP 470 (1005)
R2916	1-208-879-81	s	RES, CHIP 470 (1005)
R2917	1-208-879-81	s	RES, CHIP 470 (1005)
R2918	1-208-879-81	s	RES, CHIP 470 (1005)
R2919	1-208-879-81	s	RES, CHIP 470 (1005)
R2920	1-208-879-81	s	RES, CHIP 470 (1005)
R3002	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3101	1-208-856-81	s	RES, CHIP 51 (1005)
R3102	1-208-856-81	s	RES, CHIP 51 (1005)
R3103	1-208-856-81	s	RES, CHIP 51 (1005)
R3104	1-208-856-81	s	RES, CHIP 51 (1005)
R3105	1-208-856-81	s	RES, CHIP 51 (1005)
R3106	1-208-856-81	s	RES, CHIP 51 (1005)
R3107	1-208-856-81	s	RES, CHIP 51 (1005)
R3108	1-208-856-81	s	RES, CHIP 51 (1005)
R3109	1-208-856-81	s	RES, CHIP 51 (1005)
R3110	1-208-856-81	s	RES, CHIP 51 (1005)
R3111	1-208-856-81	s	RES, CHIP 51 (1005)
R3112	1-208-856-81	s	RES, CHIP 51 (1005)
R3113	1-208-856-81	s	RES, CHIP 51 (1005)
R3114	1-208-856-81	s	RES, CHIP 51 (1005)
R3115	1-208-856-81	s	RES, CHIP 51 (1005)
R3116	1-208-856-81	s	RES, CHIP 51 (1005)
R3117	1-208-856-81	s	RES, CHIP 51 (1005)
R3118	1-208-856-81	s	RES, CHIP 51 (1005)
R3119	1-208-856-81	s	RES, CHIP 51 (1005)
R3120	1-208-856-81	s	RES, CHIP 51 (1005)
R3121	1-208-856-81	s	RES, CHIP 51 (1005)
R3122	1-208-856-81	s	RES, CHIP 51 (1005)
R3123	1-208-856-81	s	RES, CHIP 51 (1005)
R3124	1-208-856-81	s	RES, CHIP 51 (1005)
R3125	1-208-860-81	s	RES, CHIP 75 (1005)
R3126	1-208-860-81	s	RES, CHIP 75 (1005)
R3127	1-208-860-81	s	RES, CHIP 75 (1005)
R3128	1-208-860-81	s	RES, CHIP 75 (1005)
R3129	1-208-860-81	s	RES, CHIP 75 (1005)
R3130	1-208-860-81	s	RES, CHIP 75 (1005)
R3131	1-208-860-81	s	RES, CHIP 75 (1005)
R3132	1-208-860-81	s	RES, CHIP 75 (1005)
R3133	1-208-860-81	s	RES, CHIP 75 (1005)
R3134	1-208-860-81	s	RES, CHIP 75 (1005)
R3135	1-208-860-81	s	RES, CHIP 75 (1005)
R3136	1-208-860-81	s	RES, CHIP 75 (1005)
R3137	1-208-856-81	s	RES, CHIP 51 (1005)
R3138	1-208-856-81	s	RES, CHIP 51 (1005)
R3139	1-208-856-81	s	RES, CHIP 51 (1005)
R3140	1-208-856-81	s	RES, CHIP 51 (1005)
R3141	1-208-856-81	s	RES, CHIP 51 (1005)
R3142	1-208-856-81	s	RES, CHIP 51 (1005)
R3143	1-208-856-81	s	RES, CHIP 51 (1005)
R3144	1-208-856-81	s	RES, CHIP 51 (1005)
R3145	1-208-856-81	s	RES, CHIP 51 (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3146	1-208-856-81	s	RES, CHIP 51 (1005)
R3147	1-208-856-81	s	RES, CHIP 51 (1005)
R3148	1-208-856-81	s	RES, CHIP 51 (1005)
R3149	1-208-856-81	s	RES, CHIP 51 (1005)
R3150	1-208-856-81	s	RES, CHIP 51 (1005)
R3151	1-208-856-81	s	RES, CHIP 51 (1005)
R3152	1-208-856-81	s	RES, CHIP 51 (1005)
R3153	1-208-856-81	s	RES, CHIP 51 (1005)
R3154	1-208-856-81	s	RES, CHIP 51 (1005)
R3155	1-208-856-81	s	RES, CHIP 51 (1005)
R3156	1-208-856-81	s	RES, CHIP 51 (1005)
R3157	1-208-856-81	s	RES, CHIP 51 (1005)
R3158	1-208-856-81	s	RES, CHIP 51 (1005)
R3159	1-208-856-81	s	RES, CHIP 51 (1005)
R3160	1-208-856-81	s	RES, CHIP 51 (1005)
R3161	1-208-860-81	s	RES, CHIP 75 (1005)
R3162	1-208-860-81	s	RES, CHIP 75 (1005)
R3163	1-208-860-81	s	RES, CHIP 75 (1005)
R3164	1-208-860-81	s	RES, CHIP 75 (1005)
R3165	1-208-860-81	s	RES, CHIP 75 (1005)
R3166	1-208-860-81	s	RES, CHIP 75 (1005)
R3167	1-208-860-81	s	RES, CHIP 75 (1005)
R3168	1-208-860-81	s	RES, CHIP 75 (1005)
R3169	1-208-860-81	s	RES, CHIP 75 (1005)
R3170	1-208-860-81	s	RES, CHIP 75 (1005)
R3171	1-208-860-81	s	RES, CHIP 75 (1005)
R3172	1-208-860-81	s	RES, CHIP 75 (1005)
R3201	1-208-855-81	s	RES, CHIP 47 (1005)
R3202	1-220-878-81	s	RES, CHIP 22 (1005)
R3242	1-208-911-81	s	RES, CHIP 10K (1005)
R3243	1-208-911-81	s	RES, CHIP 10K (1005)
R3303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3405	1-208-863-81	s	RES, CHIP 100 (1005)
R3406	1-208-863-81	s	RES, CHIP 100 (1005)
R3407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3411	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3417	1-208-863-81	s	RES, CHIP 100 (1005)
R3418	1-208-863-81	s	RES, CHIP 100 (1005)
R3419	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3420	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3423	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3424	1-208-903-81	s	RES, CHIP 4.7K (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3509	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3510	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3511	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3512	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3513	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3514	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3515	1-208-911-81	s	RES, CHIP 10K (1005)
R3516	1-208-911-81	s	RES, CHIP 10K (1005)
R3517	1-208-863-81	s	RES, CHIP 100 (1005)
R3518	1-208-863-81	s	RES, CHIP 100 (1005)
R3519	1-208-860-81	s	RES, CHIP 75 (1005)
R3520	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3609	1-208-911-81	s	RES, CHIP 10K (1005)
R3611	1-208-911-81	s	RES, CHIP 10K (1005)
R3613	1-208-895-81	s	RES, CHIP 2.2K (1005)
R3614	1-208-911-81	s	RES, CHIP 10K (1005)
R3615	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3617	1-208-911-81	s	RES, CHIP 10K (1005)
R3620	1-208-911-81	s	RES, CHIP 10K (1005)
R3621	1-208-911-81	s	RES, CHIP 10K (1005)
R3622	1-208-911-81	s	RES, CHIP 10K (1005)
R3623	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3635	1-208-875-81	s	RES, CHIP 330 (1005)
R3636	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3637	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3638	1-208-871-81	s	RES, CHIP 220 (1005)
R3639	1-208-871-81	s	RES, CHIP 220 (1005)
R3640	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3641	1-208-871-81	s	RES, CHIP 220 (1005)
R3642	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3643	1-208-911-81	s	RES, CHIP 10K (1005)
R3644	1-208-911-81	s	RES, CHIP 10K (1005)
R3701	1-220-878-81	s	RES, CHIP 22 (1005)
R3702	1-220-878-81	s	RES, CHIP 22 (1005)
R3703	1-220-878-81	s	RES, CHIP 22 (1005)
R3704	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3705	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3706	1-208-856-81	s	RES, CHIP 51 (1005)
R3707	1-208-856-81	s	RES, CHIP 51 (1005)
R3708	1-208-856-81	s	RES, CHIP 51 (1005)
R3709	1-208-879-81	s	RES, CHIP 470 (1005)
R3710	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3711	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3805	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3807	1-220-878-81	s	RES, CHIP 22 (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3808	1-220-878-81	s	RES, CHIP 22 (1005)
R3809	1-220-878-81	s	RES, CHIP 22 (1005)
R3810	1-220-878-81	s	RES, CHIP 22 (1005)
R3811	1-220-878-81	s	RES, CHIP 22 (1005)
R3812	1-220-878-81	s	RES, CHIP 22 (1005)
R3813	1-220-878-81	s	RES, CHIP 22 (1005)
R3814	1-220-878-81	s	RES, CHIP 22 (1005)
R3815	1-220-878-81	s	RES, CHIP 22 (1005)
R3816	1-220-878-81	s	RES, CHIP 22 (1005)
R3817	1-220-878-81	s	RES, CHIP 22 (1005)
R3818	1-220-878-81	s	RES, CHIP 22 (1005)
R3819	1-220-878-81	s	RES, CHIP 22 (1005)
R3820	1-220-878-81	s	RES, CHIP 22 (1005)
R3821	1-220-878-81	s	RES, CHIP 22 (1005)
R3822	1-220-878-81	s	RES, CHIP 22 (1005)
R3823	1-220-878-81	s	RES, CHIP 22 (1005)
R3824	1-220-878-81	s	RES, CHIP 22 (1005)
R3825	1-220-878-81	s	RES, CHIP 22 (1005)
R3826	1-220-878-81	s	RES, CHIP 22 (1005)
R3835	1-220-878-81	s	RES, CHIP 22 (1005)
R3837	1-220-878-81	s	RES, CHIP 22 (1005)
R3839	1-220-878-81	s	RES, CHIP 22 (1005)
R3845	1-220-878-81	s	RES, CHIP 22 (1005)
R3846	1-220-878-81	s	RES, CHIP 22 (1005)
R3853	1-220-878-81	s	RES, CHIP 22 (1005)
R3854	1-220-878-81	s	RES, CHIP 22 (1005)
R3855	1-220-878-81	s	RES, CHIP 22 (1005)
R3861	1-220-878-81	s	RES, CHIP 22 (1005)
R3902	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3903	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3906	1-208-855-81	s	RES, CHIP 47 (1005)
R3907	1-208-855-81	s	RES, CHIP 47 (1005)
R3908	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3914	1-220-882-81	s	RES, CHIP 33 (1005)
R3915	1-220-882-81	s	RES, CHIP 33 (1005)
R3916	1-220-882-81	s	RES, CHIP 33 (1005)
R3917	1-220-882-81	s	RES, CHIP 33 (1005)
R3918	1-208-911-81	s	RES, CHIP 10K (1005)
R3921	1-208-911-81	s	RES, CHIP 10K (1005)
R3923	1-208-911-81	s	RES, CHIP 10K (1005)
R4102	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4103	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4107	1-208-911-81	s	RES, CHIP 10K (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4114	1-208-856-81	s	RES, CHIP 51 (1005)
R4115	1-208-856-81	s	RES, CHIP 51 (1005)
R4116	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4123	1-208-911-81	s	RES, CHIP 10K (1005)
R4124	1-208-959-81	s	RES, CHIP 1M (1005)
R4125	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4126	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4127	1-208-879-81	s	RES, CHIP 470 (1005)
R4128	1-208-879-81	s	RES, CHIP 470 (1005)
R4129	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4130	1-208-879-81	s	RES, CHIP 470 (1005)
R4131	1-208-856-81	s	RES, CHIP 51 (1005)
R4132	1-208-856-81	s	RES, CHIP 51 (1005)
R4133	1-208-856-81	s	RES, CHIP 51 (1005)
R4134	1-208-856-81	s	RES, CHIP 51 (1005)
R4135	1-208-856-81	s	RES, CHIP 51 (1005)
R4136	1-208-856-81	s	RES, CHIP 51 (1005)
R4137	1-208-856-81	s	RES, CHIP 51 (1005)
R4138	1-208-856-81	s	RES, CHIP 51 (1005)
R4139	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4140	1-208-903-81	s	RES, CHIP 4.7K (1005)
RB301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB302	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB402	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB403	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB504	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB508	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB509	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB510	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB511	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB512	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB513	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB514	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB516	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB517	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB518	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB519	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB520	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB521	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB522	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB523	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB524	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB527	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB528	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB529	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB530	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB531	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB532	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB613	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB614	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB615	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB616	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB617	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB618	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB619	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB620	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB621	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB622	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB623	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB624	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB625	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB626	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB627	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB628	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB629	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB630	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB631	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB718	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB719	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB720	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB721	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB722	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB802	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB803	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB804	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB805	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB806	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB807	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB808	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB909	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB910	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB911	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB912	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB914	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB916	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB917	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB918	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB919	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB920	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB921	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2706	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB2901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2906	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB3230	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3231	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3232	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3233	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3235	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3236	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3237	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3238	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3239	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3240	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3241	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3242	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3243	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3244	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3245	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3246	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3502	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3503	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3504	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3505	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3506	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3507	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3509	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3511	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3516	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3517	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3518	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3519	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3520	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3521	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3522	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3523	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3524	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3601	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3602	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3603	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3604	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3605	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3606	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB3607	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3609	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3610	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3611	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3909	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3910	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3911	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3912	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3914	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3916	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3920	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3921	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3922	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4203	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4204	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4205	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S401	1-771-721-21	s	SWITCH, TACTILE

(CA-82A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
S402	1-771-721-21	s	SWITCH, TACTILE
S501	1-771-721-21	s	SWITCH, TACTILE
S901	1-692-271-41	s	SWITCH, SLIDE
S902	1-692-271-41	s	SWITCH, SLIDE
S903	1-692-271-41	s	SWITCH, SLIDE
S904	1-692-271-41	s	SWITCH, SLIDE
T2801	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3101	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3102	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3103	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3104	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3105	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T3106	1-443-851-21	s	GIGABIT MAGNETIC MODULE
TP219	1-535-877-22	s	CHIP, CHECKER
TP223	1-535-877-22	s	CHIP, CHECKER
TP224	1-535-877-22	s	CHIP, CHECKER
TP225	1-535-877-22	s	CHIP, CHECKER
TP226	1-535-877-22	s	CHIP, CHECKER
TP227	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP904	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
X801	1-813-493-11	s	OSCILLATOR, CRYSTAL
X2701	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2801	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X2901	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X3201	1-813-493-11	s	OSCILLATOR, CRYSTAL
X4101	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)

CN-3233 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-852-A	s	MOUNTED CIRCUIT BOARD, CN-3233
1pc	2-655-586-01	s	SCREW +B M2.6 EG
1pc	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
0.1pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C103	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C104	1-137-894-21	s	CAP, CHIP ELECT 470MF
C105	1-137-894-21	s	CAP, CHIP ELECT 470MF
C111	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C112	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C131	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C132	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C133	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C134	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C135	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C141	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C142	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C143	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C144	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C145	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C151	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C152	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C153	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C154	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C155	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C204	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
CN201	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)

(CN-3233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN210	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN220	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN301	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN311	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN321	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN401	1-750-890-11	s	CONNECTOR,D-SUB(ANGLE TYPE)25P
D101	8-719-069-28	s	DI 1SS400FJTE61
D102	6-502-197-01	s	DI SML-D12M8WT86SM
D131	8-719-069-28	s	DI 1SS400FJTE61
D132	6-502-197-01	s	DI SML-D12M8WT86SM
D141	8-719-069-28	s	DI 1SS400FJTE61
D142	6-502-197-01	s	DI SML-D12M8WT86SM
D151	8-719-069-28	s	DI 1SS400FJTE61
D152	6-502-197-01	s	DI SML-D12M8WT86SM
D201	8-719-069-28	s	DI 1SS400FJTE61
D401	8-719-069-28	s	DI 1SS400FJTE61
D402	8-719-069-28	s	DI 1SS400FJTE61
D403	8-719-069-28	s	DI 1SS400FJTE61
D404	8-719-069-28	s	DI 1SS400FJTE61
E111	1-535-877-22	s	CHIP, CHECKER
E112	1-535-877-22	s	CHIP, CHECKER
E121	1-535-877-22	s	CHIP, CHECKER
E131	1-535-877-22	s	CHIP, CHECKER
E141	1-535-877-22	s	CHIP, CHECKER
E151	1-535-877-22	s	CHIP, CHECKER
FB401	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB402	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB403	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB404	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB405	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB406	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB407	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB408	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB409	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB410	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB411	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB412	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB413	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB414	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FL210	1-239-898-22	s	FILTER, EMI (SMD)
FL211	1-239-898-22	s	FILTER, EMI (SMD)
FL212	1-239-898-22	s	FILTER, EMI (SMD)
FL213	1-239-898-22	s	FILTER, EMI (SMD)
FL220	1-239-898-22	s	FILTER, EMI (SMD)
FL221	1-239-898-22	s	FILTER, EMI (SMD)
FL222	1-239-898-22	s	FILTER, EMI (SMD)
FL223	1-239-898-22	s	FILTER, EMI (SMD)
FL401	1-239-898-22	s	FILTER, EMI (SMD)
FL402	1-239-898-22	s	FILTER, EMI (SMD)
FL403	1-239-898-22	s	FILTER, EMI (SMD)
FL404	1-239-898-22	s	FILTER, EMI (SMD)
FL405	1-239-898-22	s	FILTER, EMI (SMD)
FL406	1-239-898-22	s	FILTER, EMI (SMD)
FL407	1-239-898-22	s	FILTER, EMI (SMD)
FL408	1-239-898-22	s	FILTER, EMI (SMD)
IC131	6-709-014-01	s	IC UPC2933BT-E2-AZ

(CN-3233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC141	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC151	6-709-012-01	s	IC UPC2918BT-E2-AZ
IC161	6-710-018-01	s	IC CAT24C02WI-GT3
IC162	6-710-018-01	s	IC CAT24C02WI-GT3
L101	1-416-344-21	s	COIL, CHOKE 10UH
L111	1-416-511-21	s	COIL, CHOKE 47.0UH
L131	1-416-511-21	s	COIL, CHOKE 47.0UH
L141	1-416-511-21	s	COIL, CHOKE 47.0UH
L151	1-416-511-21	s	COIL, CHOKE 47.0UH
L201	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L202	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
PS101	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
PS111	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
PS131	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
PS141	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
PS151	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
Q141	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q151	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q201	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q202	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R133	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CN-3233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R134	1-208-895-81	s	RES, CHIP 2.2K (1005)
R142	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R143	1-208-887-81	s	RES, CHIP 1.0K (1005)
R144	1-208-903-81	s	RES, CHIP 4.7K (1005)
R145	1-208-895-81	s	RES, CHIP 2.2K (1005)
R152	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R153	1-208-887-81	s	RES, CHIP 1.0K (1005)
R154	1-208-903-81	s	RES, CHIP 4.7K (1005)
R155	1-208-895-81	s	RES, CHIP 2.2K (1005)
R161	1-208-935-81	s	RES, CHIP 100K (1005)
R162	1-208-935-81	s	RES, CHIP 100K (1005)
R163	1-208-887-81	s	RES, CHIP 1.0K (1005)
R164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R165	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R170	1-208-935-81	s	RES, CHIP 100K (1005)
R171	1-208-935-81	s	RES, CHIP 100K (1005)
R172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R173	1-208-887-81	s	RES, CHIP 1.0K (1005)
R174	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R176	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R178	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R181	1-208-935-81	s	RES, CHIP 100K (1005)
R182	1-208-935-81	s	RES, CHIP 100K (1005)
R185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R193	1-208-935-81	s	RES, CHIP 100K (1005)
R194	1-208-935-81	s	RES, CHIP 100K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-879-81	s	RES, CHIP 470 (1005)
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R222	1-208-879-81	s	RES, CHIP 470 (1005)
R224	1-208-887-81	s	RES, CHIP 1.0K (1005)
R226	1-208-887-81	s	RES, CHIP 1.0K (1005)
R227	1-208-887-81	s	RES, CHIP 1.0K (1005)
R228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R251	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-208-855-81	s	RES, CHIP 47 (1005)
R279	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R281	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R295	1-208-903-81	s	RES, CHIP 4.7K (1005)
R296	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-208-887-81	s	RES, CHIP 1.0K (1005)
R309	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-855-81	s	RES, CHIP 47 (1005)

(CN-3233 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R312	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-208-855-81	s	RES, CHIP 47 (1005)
R314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-887-81	s	RES, CHIP 1.0K (1005)
R319	1-208-887-81	s	RES, CHIP 1.0K (1005)
R321	1-208-855-81	s	RES, CHIP 47 (1005)
R322	1-208-855-81	s	RES, CHIP 47 (1005)
R323	1-208-855-81	s	RES, CHIP 47 (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-887-81	s	RES, CHIP 1.0K (1005)
R331	1-208-855-81	s	RES, CHIP 47 (1005)
R332	1-208-855-81	s	RES, CHIP 47 (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R338	1-208-887-81	s	RES, CHIP 1.0K (1005)
R339	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RY401	1-755-379-21	s	RELAY
RY402	1-755-379-21	s	RELAY
RY403	1-755-379-21	s	RELAY
RY404	1-755-379-21	s	RELAY
TP101	1-535-877-22	s	CHIP, CHECKER
TP131	1-535-877-22	s	CHIP, CHECKER
TP141	1-535-877-22	s	CHIP, CHECKER
TP151	1-535-877-22	s	CHIP, CHECKER

CN-3233A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1830-153-A	s	MOUNTED CIRCUIT BOARD, CN-3233A
1pc	2-655-586-01	s	SCREW +B M2.6 EG
1pc	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C103	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C104	1-137-894-21	s	CAP, CHIP ELECT 470MF
C105	1-137-894-21	s	CAP, CHIP ELECT 470MF
C111	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C112	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C131	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C132	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C133	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C134	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C135	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C141	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C142	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C143	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C144	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C145	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C151	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C152	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C153	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C154	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C155	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C162	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C164	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C204	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C321	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C323	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C331	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C332	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C333	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C334	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
CN201	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN210	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN220	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN321	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN331	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN401	1-750-890-11	s	CONNECTOR,D-SUB(ANGLE TYPE)25P
D101	8-719-069-28	s	DI 1SS400FJTE61
D102	6-502-197-01	s	DI SML-D12M8WT86SM
D131	8-719-069-28	s	DI 1SS400FJTE61
D132	6-502-197-01	s	DI SML-D12M8WT86SM

(CN-3233A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D141	8-719-069-28	s	DI 1SS400FJTE61
D142	6-502-197-01	s	DI SML-D12M8WT86SM
D151	8-719-069-28	s	DI 1SS400FJTE61
D152	6-502-197-01	s	DI SML-D12M8WT86SM
D201	8-719-069-28	s	DI 1SS400FJTE61
D401	8-719-069-28	s	DI 1SS400FJTE61
D402	8-719-069-28	s	DI 1SS400FJTE61
D403	8-719-069-28	s	DI 1SS400FJTE61
D404	8-719-069-28	s	DI 1SS400FJTE61
E111	1-535-877-22	s	CHIP, CHECKER
E112	1-535-877-22	s	CHIP, CHECKER
E121	1-535-877-22	s	CHIP, CHECKER
E131	1-535-877-22	s	CHIP, CHECKER
E141	1-535-877-22	s	CHIP, CHECKER
E151	1-535-877-22	s	CHIP, CHECKER
FB401	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB402	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB403	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB404	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB405	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB406	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB407	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB408	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB409	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB410	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB411	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB412	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB413	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB414	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FL210	1-239-898-22	s	FILTER, EMI (SMD)
FL211	1-239-898-22	s	FILTER, EMI (SMD)
FL212	1-239-898-22	s	FILTER, EMI (SMD)
FL213	1-239-898-22	s	FILTER, EMI (SMD)
FL220	1-239-898-22	s	FILTER, EMI (SMD)
FL221	1-239-898-22	s	FILTER, EMI (SMD)
FL222	1-239-898-22	s	FILTER, EMI (SMD)
FL223	1-239-898-22	s	FILTER, EMI (SMD)
FL401	1-239-898-22	s	FILTER, EMI (SMD)
FL402	1-239-898-22	s	FILTER, EMI (SMD)
FL403	1-239-898-22	s	FILTER, EMI (SMD)
FL404	1-239-898-22	s	FILTER, EMI (SMD)
FL405	1-239-898-22	s	FILTER, EMI (SMD)
FL406	1-239-898-22	s	FILTER, EMI (SMD)
FL407	1-239-898-22	s	FILTER, EMI (SMD)
FL408	1-239-898-22	s	FILTER, EMI (SMD)
IC131	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC141	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC151	6-709-012-01	s	IC UPC2918BT-E2-AZ
IC161	6-710-018-01	s	IC CAT24C02WI-GT3
IC162	6-710-018-01	s	IC CAT24C02WI-GT3
L101	1-416-344-21	s	COIL, CHOKE 10UH
L111	1-416-511-21	s	COIL, CHOKE 47.0UH
L131	1-416-511-21	s	COIL, CHOKE 47.0UH
L141	1-416-511-21	s	COIL, CHOKE 47.0UH
L151	1-416-511-21	s	COIL, CHOKE 47.0UH
L201	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L202	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CN-3233A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
PS101	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS111	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS131	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS141	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS151	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q141	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q151	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q201	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q202	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R133	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-895-81	s	RES, CHIP 2.2K (1005)
R142	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R143	1-208-887-81	s	RES, CHIP 1.0K (1005)
R144	1-208-903-81	s	RES, CHIP 4.7K (1005)
R145	1-208-895-81	s	RES, CHIP 2.2K (1005)
R152	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R153	1-208-887-81	s	RES, CHIP 1.0K (1005)
R154	1-208-903-81	s	RES, CHIP 4.7K (1005)
R155	1-208-895-81	s	RES, CHIP 2.2K (1005)
R161	1-208-935-81	s	RES, CHIP 100K (1005)
R162	1-208-935-81	s	RES, CHIP 100K (1005)

(CN-3233A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R163	1-208-887-81	s	RES, CHIP 1.0K (1005)
R164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R165	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R170	1-208-935-81	s	RES, CHIP 100K (1005)
R171	1-208-935-81	s	RES, CHIP 100K (1005)
R172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R173	1-208-887-81	s	RES, CHIP 1.0K (1005)
R174	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R176	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R178	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R181	1-208-935-81	s	RES, CHIP 100K (1005)
R182	1-208-935-81	s	RES, CHIP 100K (1005)
R185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R193	1-208-935-81	s	RES, CHIP 100K (1005)
R194	1-208-935-81	s	RES, CHIP 100K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-879-81	s	RES, CHIP 470 (1005)
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R222	1-208-879-81	s	RES, CHIP 470 (1005)
R224	1-208-887-81	s	RES, CHIP 1.0K (1005)
R226	1-208-887-81	s	RES, CHIP 1.0K (1005)
R227	1-208-887-81	s	RES, CHIP 1.0K (1005)
R228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R251	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-208-855-81	s	RES, CHIP 47 (1005)
R279	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R281	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R295	1-208-903-81	s	RES, CHIP 4.7K (1005)
R296	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-855-81	s	RES, CHIP 47 (1005)
R322	1-208-855-81	s	RES, CHIP 47 (1005)
R323	1-208-855-81	s	RES, CHIP 47 (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-887-81	s	RES, CHIP 1.0K (1005)
R331	1-208-855-81	s	RES, CHIP 47 (1005)
R332	1-208-855-81	s	RES, CHIP 47 (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R338	1-208-887-81	s	RES, CHIP 1.0K (1005)
R339	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CN-3233A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RY401	1-755-379-21	s	RELAY
RY402	1-755-379-21	s	RELAY
RY403	1-755-379-21	s	RELAY
RY404	1-755-379-21	s	RELAY
TP101	1-535-877-22	s	CHIP, CHECKER
TP131	1-535-877-22	s	CHIP, CHECKER
TP141	1-535-877-22	s	CHIP, CHECKER
TP151	1-535-877-22	s	CHIP, CHECKER

CN-3234 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-853-A	s	MOUNTED CIRCUIT BOARD, CN-3234
4pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C103	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C104	1-137-894-21	s	CAP, CHIP ELECT 470MF
C105	1-137-894-21	s	CAP, CHIP ELECT 470MF
C131	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C132	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C133	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C134	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C135	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
CN210	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN220	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN401	1-750-890-11	s	CONNECTOR,D-SUB(ANGLE TYPE)25P
D101	8-719-069-28	s	DI 1SS400FJTE61
D102	6-502-197-01	s	DI SML-D12M8WT86SM
D131	8-719-069-28	s	DI 1SS400FJTE61
D132	6-502-197-01	s	DI SML-D12M8WT86SM
D401	8-719-069-28	s	DI 1SS400FJTE61
D402	8-719-069-28	s	DI 1SS400FJTE61
D403	8-719-069-28	s	DI 1SS400FJTE61
D404	8-719-069-28	s	DI 1SS400FJTE61
E111	1-535-877-22	s	CHIP, CHECKER
E112	1-535-877-22	s	CHIP, CHECKER
E121	1-535-877-22	s	CHIP, CHECKER
E131	1-535-877-22	s	CHIP, CHECKER
E141	1-535-877-22	s	CHIP, CHECKER
E151	1-535-877-22	s	CHIP, CHECKER
FB401	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB402	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB403	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB404	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB405	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB406	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB407	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB408	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB409	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB410	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB411	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB412	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB413	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB414	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FL210	1-239-898-22	s	FILTER, EMI (SMD)
FL211	1-239-898-22	s	FILTER, EMI (SMD)
FL212	1-239-898-22	s	FILTER, EMI (SMD)
FL213	1-239-898-22	s	FILTER, EMI (SMD)
FL220	1-239-898-22	s	FILTER, EMI (SMD)
FL221	1-239-898-22	s	FILTER, EMI (SMD)
FL222	1-239-898-22	s	FILTER, EMI (SMD)
FL223	1-239-898-22	s	FILTER, EMI (SMD)
FL401	1-239-898-22	s	FILTER, EMI (SMD)

(CN-3234 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FL402	1-239-898-22	s	FILTER, EMI (SMD)
FL403	1-239-898-22	s	FILTER, EMI (SMD)
FL404	1-239-898-22	s	FILTER, EMI (SMD)
FL405	1-239-898-22	s	FILTER, EMI (SMD)
FL406	1-239-898-22	s	FILTER, EMI (SMD)
FL407	1-239-898-22	s	FILTER, EMI (SMD)
FL408	1-239-898-22	s	FILTER, EMI (SMD)
IC131	6-709-014-01	s	IC UPC2933BT-E2-AZ
L101	1-416-344-21	s	COIL, CHOKE 10UH
L131	1-416-511-21	s	COIL, CHOKE 47.0UH
PS101	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
PS131	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-895-81	s	RES, CHIP 2.2K (1005)
R132	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R133	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-895-81	s	RES, CHIP 2.2K (1005)
R283	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R291	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CN-3234 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R292	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R293	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R294	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R295	1-208-903-81	s	RES, CHIP 4.7K (1005)
R296	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RY401	1-755-379-21	s	RELAY
RY402	1-755-379-21	s	RELAY
RY403	1-755-379-21	s	RELAY
RY404	1-755-379-21	s	RELAY
TP101	1-535-877-22	s	CHIP, CHECKER
TP131	1-535-877-22	s	CHIP, CHECKER

CN-3235 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-313-A	s	MOUNTED CIRCUIT BOARD, CN-3235
2pcs	2-655-586-01	s	SCREW +B M2.6 EG
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
0.2pcs	7-600-000-48	s	ADHESIVE AGENT(SC608LVZ2)180ML
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C201	1-137-894-21	s	CAP, CHIP ELECT 470MF
C202	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C203	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C204	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C205	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C206	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C207	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C208	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C211	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C212	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C213	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C214	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C215	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C216	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C217	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C218	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C219	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C221	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C222	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C223	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C224	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C225	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C226	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C227	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C228	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C229	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C230	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C231	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C234	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C235	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C236	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C237	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C246	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C247	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C248	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CN-3235 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C401	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C402	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C405	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C407	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C408	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C415	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C416	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C417	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C509	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C514	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C519	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C520	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C526	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C527	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C602	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C603	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005

(CN-3235 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C604	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C650	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C651	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C652	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C653	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
CN401	1-817-109-11	s	CONNECTOR, USB (A)
CN402	1-817-109-11	s	CONNECTOR, USB (A)
CN501	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D203	8-719-072-43	s	DIODE RB050L-40TE25
D204	8-719-072-43	s	DIODE RB050L-40TE25
D205	8-719-072-43	s	DIODE RB050L-40TE25
D206	8-719-072-43	s	DIODE RB050L-40TE25
D207	8-719-069-28	s	DI 1SS400FJTE61
D208	6-502-197-01	s	DI SML-D12M8WT86SM
D209	6-502-197-01	s	DI SML-D12M8WT86SM
D210	8-719-069-28	s	DI 1SS400FJTE61
D211	8-719-069-28	s	DI 1SS400FJTE61
D212	6-502-197-01	s	DI SML-D12M8WT86SM
D213	6-502-197-01	s	DI SML-D12M8WT86SM
D214	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-598-01	s	DI SML-D12U8WT86
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-598-01	s	DI SML-D12U8WT86
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB404	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB405	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB406	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	8-759-669-64	s	IC TL1451ACPWR-12
IC202	8-759-338-95	s	IC NJM2903V(TE2)
IC204	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC205	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC301	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC302	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC303	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC401	6-710-775-01	s	IC UPD720114GA-9EU-A
IC402	6-700-659-01	s	IC TPS2044ADR
IC502	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC503	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC504	8-759-831-52	s	IC TC7WH125FK(TE85R)
L201	1-419-491-21	s	COIL, CHOKE 10UH

(CN-3235 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L202	1-419-491-21	s	COIL, CHOKE 10UH
L203	1-400-175-21	s	COIL, CHOKE 47UH
L204	1-400-175-21	s	COIL, CHOKE 47UH
L205	1-419-491-21	s	COIL, CHOKE 10UH
L206	1-419-491-21	s	COIL, CHOKE 10UH
L209	1-457-372-21	s	COIL, CHOKE 1UH
L401	1-457-223-11	s	COMMON MODE CHOKE COIL
L402	1-457-223-11	s	COMMON MODE CHOKE COIL
PS201	1-576-677-21	s	LINK, IC (4A/72V)
PS203	1-576-677-21	s	LINK, IC (4A/72V)
Q201	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q202	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q203	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q204	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q205	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q206	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q207	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q208	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q209	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q210	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q211	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q212	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q301	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q401	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q402	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R201	1-208-943-81	s	RES, CHIP 220K (1005)
R202	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-943-81	s	RES, CHIP 220K (1005)
R204	1-208-927-81	s	RES, CHIP 47K (1005)
R205	1-208-943-81	s	RES, CHIP 220K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-943-81	s	RES, CHIP 220K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-943-81	s	RES, CHIP 220K (1005)
R212	1-208-943-81	s	RES, CHIP 220K (1005)
R213	1-208-935-81	s	RES, CHIP 100K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-935-81	s	RES, CHIP 100K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-715-11	s	RES, CHIP 22K (1005)
R219	1-208-943-81	s	RES, CHIP 220K (1005)
R220	1-208-927-81	s	RES, CHIP 47K (1005)
R221	1-208-943-81	s	RES, CHIP 220K (1005)
R222	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-871-81	s	RES, CHIP 220 (1005)
R224	1-208-871-81	s	RES, CHIP 220 (1005)
R225	1-208-887-81	s	RES, CHIP 1.0K (1005)
R226	1-208-871-81	s	RES, CHIP 220 (1005)
R227	1-208-871-81	s	RES, CHIP 220 (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-911-81	s	RES, CHIP 10K (1005)
R230	1-208-887-81	s	RES, CHIP 1.0K (1005)
R231	1-208-903-81	s	RES, CHIP 4.7K (1005)
R232	1-208-863-81	s	RES, CHIP 100 (1005)
R233	1-208-871-81	s	RES, CHIP 220 (1005)

(CN-3235 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R234	1-208-863-81	s	RES, CHIP 100 (1005)
R235	1-208-871-81	s	RES, CHIP 220 (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R239	1-208-911-81	s	RES, CHIP 10K (1005)
R240	1-208-879-81	s	RES, CHIP 470 (1005)
R242	1-208-903-81	s	RES, CHIP 4.7K (1005)
R244	1-208-903-81	s	RES, CHIP 4.7K (1005)
R245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R246	1-208-911-81	s	RES, CHIP 10K (1005)
R247	1-208-715-11	s	RES, CHIP 22K (1005)
R248	1-208-927-81	s	RES, CHIP 47K (1005)
R249	1-208-911-81	s	RES, CHIP 10K (1005)
R250	1-208-715-11	s	RES, CHIP 22K (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)
R252	1-208-911-81	s	RES, CHIP 10K (1005)
R253	1-208-855-81	s	RES, CHIP 47 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-855-81	s	RES, CHIP 47 (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-715-11	s	RES, CHIP 22K (1005)
R260	1-208-903-81	s	RES, CHIP 4.7K (1005)
R261	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-911-81	s	RES, CHIP 10K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R266	1-208-887-81	s	RES, CHIP 1.0K (1005)
R267	1-208-903-81	s	RES, CHIP 4.7K (1005)
R268	1-208-895-81	s	RES, CHIP 2.2K (1005)
R269	1-208-887-81	s	RES, CHIP 1.0K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-887-81	s	RES, CHIP 1.0K (1005)
R272	1-208-903-81	s	RES, CHIP 4.7K (1005)
R273	1-208-895-81	s	RES, CHIP 2.2K (1005)
R274	1-208-903-81	s	RES, CHIP 4.7K (1005)
R275	1-208-895-81	s	RES, CHIP 2.2K (1005)
R301	1-208-903-81	s	RES, CHIP 4.7K (1005)
R302	1-208-887-81	s	RES, CHIP 1.0K (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-208-903-81	s	RES, CHIP 4.7K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-208-911-81	s	RES, CHIP 10K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-218-989-11	s	RES, CHIP 1M (1005)
R404	1-208-879-81	s	RES, CHIP 470 (1005)
R405	1-208-879-81	s	RES, CHIP 470 (1005)
R409	1-208-855-81	s	RES, CHIP 47 (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R416	1-208-887-81	s	RES, CHIP 1.0K (1005)
R417	1-208-887-81	s	RES, CHIP 1.0K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R419	1-208-911-81	s	RES, CHIP 10K (1005)

(CN-3235 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-208-895-81	s	RES, CHIP 2.2K (1005)
R423	1-208-871-81	s	RES, CHIP 220 (1005)
R424	1-220-870-81	s	RES, CHIP 10 (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-208-927-81	s	RES, CHIP 47K (1005)
R428	1-208-927-81	s	RES, CHIP 47K (1005)
R429	1-218-985-11	s	RES, CHIP 470K (1005)
R430	1-218-985-11	s	RES, CHIP 470K (1005)
R431	1-208-911-81	s	RES, CHIP 10K (1005)
R433	1-208-911-81	s	RES, CHIP 10K (1005)
R434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R436	1-208-887-81	s	RES, CHIP 1.0K (1005)
R437	1-208-887-81	s	RES, CHIP 1.0K (1005)
R502	1-208-903-81	s	RES, CHIP 4.7K (1005)
R503	1-208-903-81	s	RES, CHIP 4.7K (1005)
R504	1-208-903-81	s	RES, CHIP 4.7K (1005)
R505	1-208-903-81	s	RES, CHIP 4.7K (1005)
R506	1-208-903-81	s	RES, CHIP 4.7K (1005)
R507	1-208-903-81	s	RES, CHIP 4.7K (1005)
R508	1-208-943-81	s	RES, CHIP 220K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-855-81	s	RES, CHIP 47 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-208-903-81	s	RES, CHIP 4.7K (1005)
R525	1-218-989-11	s	RES, CHIP 1M (1005)
R526	1-208-903-81	s	RES, CHIP 4.7K (1005)
R527	1-208-855-81	s	RES, CHIP 47 (1005)
R528	1-208-855-81	s	RES, CHIP 47 (1005)
R529	1-208-855-81	s	RES, CHIP 47 (1005)
R530	1-208-855-81	s	RES, CHIP 47 (1005)
R531	1-208-855-81	s	RES, CHIP 47 (1005)
R532	1-208-855-81	s	RES, CHIP 47 (1005)
R533	1-208-855-81	s	RES, CHIP 47 (1005)
R534	1-208-855-81	s	RES, CHIP 47 (1005)
R535	1-208-871-81	s	RES, CHIP 220 (1005)
R536	1-208-871-81	s	RES, CHIP 220 (1005)
R537	1-208-871-81	s	RES, CHIP 220 (1005)
R538	1-208-871-81	s	RES, CHIP 220 (1005)
R539	1-208-871-81	s	RES, CHIP 220 (1005)
R540	1-208-903-81	s	RES, CHIP 4.7K (1005)
R541	1-208-903-81	s	RES, CHIP 4.7K (1005)
R601	1-208-879-81	s	RES, CHIP 470 (1005)
R602	1-208-879-81	s	RES, CHIP 470 (1005)
R603	1-208-879-81	s	RES, CHIP 470 (1005)

(CN-3235 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R604	1-208-879-81	s	RES, CHIP 470 (1005)
R653	1-208-879-81	s	RES, CHIP 470 (1005)
R654	1-208-879-81	s	RES, CHIP 470 (1005)
R655	1-208-879-81	s	RES, CHIP 470 (1005)
R656	1-208-879-81	s	RES, CHIP 470 (1005)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP3	1-535-877-22	s	CHIP, CHECKER
TP4	1-535-877-22	s	CHIP, CHECKER
TP5	1-535-877-22	s	CHIP, CHECKER
X401	1-813-345-21	s	VIBRATOR, CRYSTAL (30 MHz)
X501	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)

CNI-37 BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
20pcs	2-655-586-01	s	SCREW +B M2.6 EG
20pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-116-118-11	s	CAP, ELECT 47MF 105
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C7	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C8	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C9	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C10	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C136	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C137	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C138	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C139	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C201	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C202	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C203	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C204	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C207	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C209	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C210	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C212	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C214	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C215	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C217	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C218	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C220	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C221	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C223	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C224	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C225	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C226	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C229	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C232	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C242	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C243	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C244	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C245	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C246	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C248	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C254	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C255	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C257	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C258	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C260	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C261	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C263	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C264	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C268	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C269	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C271	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C272	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C275	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C281	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C282	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C283	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C284	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C285	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C286	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C287	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C288	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C289	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C290	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C291	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C292	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C293	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C294	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C297	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C299	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C301	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C302	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C303	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C304	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C305	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C315	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C318	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C320	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C321	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C323	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C324	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C325	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C326	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C335	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C341	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C342	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C343	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C344	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C352	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C354	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C355	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C357	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C358	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C360	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C361	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C363	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C364	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C365	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C366	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C371	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C372	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C375	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C381	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C382	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C383	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C384	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C385	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C386	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C388	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C389	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C390	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C391	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C392	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C393	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C394	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C397	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C402	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C405	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C406	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C409	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C412	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C416	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C420	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C421	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C422	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C428	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C429	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C430	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C437	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C439	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C440	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C441	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C442	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C445	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C446	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C449	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C451	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C452	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C455	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C456	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C459	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C460	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C461	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C462	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C467	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C468	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C469	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C470	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C471	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C472	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C473	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C474	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C477	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C479	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C480	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C501	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C502	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C505	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C506	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C508	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C509	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C512	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C515	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C516	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C520	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C521	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C522	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C527	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C528	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C529	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C530	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C531	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C532	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C533	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C534	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C537	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C539	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C540	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C541	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C542	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C545	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C546	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C548	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C549	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C551	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C552	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C555	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C556	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C559	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C560	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C561	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C562	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C567	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C568	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C569	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C570	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C571	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C572	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C573	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C574	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C576	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C577	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C579	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C580	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C601	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C602	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C605	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C606	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C609	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C612	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C616	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C619	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C620	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C621	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C622	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C628	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C629	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C630	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C633	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C634	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C636	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C637	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C639	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C640	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C641	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C642	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C645	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C646	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C651	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C652	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C655	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C656	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C658	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C659	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C660	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C661	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C662	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C664	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C666	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C667	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C668	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C669	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C670	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C671	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C672	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C673	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C674	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C676	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C677	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C680	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C701	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C702	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C705	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C706	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C720	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C721	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C722	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C728	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C729	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C730	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C731	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C732	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C733	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C734	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C737	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C740	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C741	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C742	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C745	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C746	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C756	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C759	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C760	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C761	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C762	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C767	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C768	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C769	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C770	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C772	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C773	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C774	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C776	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C777	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C780	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C805	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C806	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C819	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C820	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C821	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C822	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C827	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C828	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C829	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C830	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C831	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C832	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C833	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C834	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C837	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C839	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C840	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C841	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C842	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C845	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C846	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C849	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C852	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C856	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C859	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C860	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C861	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C862	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C868	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C869	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C870	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C871	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C872	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C873	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C874	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C876	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C877	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C880	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
CN1	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN7	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN8	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN9	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN10	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN11	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN12	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN13	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN14	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
CN15	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN16	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN17	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN18	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN101	1-784-254-21	s	CONNECTOR 10P
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-069-28	s	DI 1SS400FJTE61
D101	6-502-598-01	s	DI SML-D12U8WT86
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
D601	6-502-197-01	s	DI SML-D12M8WT86SM
D602	6-502-197-01	s	DI SML-D12M8WT86SM
D603	6-502-197-01	s	DI SML-D12M8WT86SM
D604	6-502-197-01	s	DI SML-D12M8WT86SM
D701	6-502-197-01	s	DI SML-D12M8WT86SM
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-197-01	s	DI SML-D12M8WT86SM
D802	6-502-197-01	s	DI SML-D12M8WT86SM
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM
DD1	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC102	6-704-641-01	s	IC R3112N111A-TR-FA
IC401	6-715-350-01	s	IC GS2965-INTE3
IC402	6-715-350-01	s	IC GS2965-INTE3
IC403	6-715-350-01	s	IC GS2965-INTE3
IC404	6-715-350-01	s	IC GS2965-INTE3
IC501	6-715-350-01	s	IC GS2965-INTE3
IC502	6-715-350-01	s	IC GS2965-INTE3
IC503	6-715-350-01	s	IC GS2965-INTE3
IC504	6-715-350-01	s	IC GS2965-INTE3
IC601	6-715-350-01	s	IC GS2965-INTE3
IC602	6-715-350-01	s	IC GS2965-INTE3
IC603	6-715-350-01	s	IC GS2965-INTE3
IC604	6-715-350-01	s	IC GS2965-INTE3
IC701	6-715-350-01	s	IC GS2965-INTE3
IC702	6-715-350-01	s	IC GS2965-INTE3
IC703	6-715-350-01	s	IC GS2965-INTE3

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC704	6-715-350-01	s	IC GS2965-INTE3
IC801	6-715-350-01	s	IC GS2965-INTE3
IC802	6-715-350-01	s	IC GS2965-INTE3
IC803	6-715-350-01	s	IC GS2965-INTE3
IC804	6-715-350-01	s	IC GS2965-INTE3
L201	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L202	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L203	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L204	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L205	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L206	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L207	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L208	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L213	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L214	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L215	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L216	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L217	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L218	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L219	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L220	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L301	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L302	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L303	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L304	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L305	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L306	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L307	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L308	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L309	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L310	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L311	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L312	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L313	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L314	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L315	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L316	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L317	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L318	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L319	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L320	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L401	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L402	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L403	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L404	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L501	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L502	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L503	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L504	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L601	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L602	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L603	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L604	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L701	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L702	1-414-396-41	s	INDUCTOR (SMD) 4.7UH

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L703	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L704	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L801	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L802	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L803	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L804	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q701	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q702	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q703	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q704	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q801	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q802	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q803	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q804	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7	1-208-895-81	s	RES, CHIP 2.2K (1005)
R8	1-208-911-81	s	RES, CHIP 10K (1005)
R9	1-208-927-81	s	RES, CHIP 47K (1005)
R10	1-208-887-81	s	RES, CHIP 1.0K (1005)
R11	1-208-887-81	s	RES, CHIP 1.0K (1005)
R12	1-208-887-81	s	RES, CHIP 1.0K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-903-81	s	RES, CHIP 4.7K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)
R119	1-220-878-81	s	RES, CHIP 22 (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-220-878-81	s	RES, CHIP 22 (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-220-878-81	s	RES, CHIP 22 (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-220-878-81	s	RES, CHIP 22 (1005)
R162	1-220-878-81	s	RES, CHIP 22 (1005)
R163	1-220-878-81	s	RES, CHIP 22 (1005)
R164	1-220-878-81	s	RES, CHIP 22 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-878-81	s	RES, CHIP 22 (1005)
R167	1-220-878-81	s	RES, CHIP 22 (1005)
R168	1-208-927-81	s	RES, CHIP 47K (1005)
R169	1-208-927-81	s	RES, CHIP 47K (1005)
R170	1-208-927-81	s	RES, CHIP 47K (1005)
R171	1-208-927-81	s	RES, CHIP 47K (1005)
R172	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-860-81	s	RES, CHIP 75 (1005)
R206	1-208-860-81	s	RES, CHIP 75 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-220-884-81	s	RES, CHIP 39 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R211	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R215	1-208-863-81	s	RES, CHIP 100 (1005)
R216	1-208-863-81	s	RES, CHIP 100 (1005)
R217	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)
R219	1-208-863-81	s	RES, CHIP 100 (1005)
R220	1-208-863-81	s	RES, CHIP 100 (1005)
R222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R234	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-860-81	s	RES, CHIP 75 (1005)
R244	1-208-860-81	s	RES, CHIP 75 (1005)
R245	1-220-884-81	s	RES, CHIP 39 (1005)
R246	1-220-884-81	s	RES, CHIP 39 (1005)
R247	1-220-884-81	s	RES, CHIP 39 (1005)
R248	1-220-884-81	s	RES, CHIP 39 (1005)
R249	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-208-863-81	s	RES, CHIP 100 (1005)
R251	1-208-863-81	s	RES, CHIP 100 (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-863-81	s	RES, CHIP 100 (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R268	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-860-81	s	RES, CHIP 75 (1005)
R274	1-208-860-81	s	RES, CHIP 75 (1005)
R275	1-208-860-81	s	RES, CHIP 75 (1005)
R276	1-208-860-81	s	RES, CHIP 75 (1005)
R277	1-220-884-81	s	RES, CHIP 39 (1005)
R278	1-220-884-81	s	RES, CHIP 39 (1005)
R279	1-208-863-81	s	RES, CHIP 100 (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-863-81	s	RES, CHIP 100 (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-860-81	s	RES, CHIP 75 (1005)
R309	1-220-884-81	s	RES, CHIP 39 (1005)
R310	1-220-884-81	s	RES, CHIP 39 (1005)
R311	1-220-884-81	s	RES, CHIP 39 (1005)
R312	1-220-884-81	s	RES, CHIP 39 (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R314	1-208-863-81	s	RES, CHIP 100 (1005)
R315	1-208-863-81	s	RES, CHIP 100 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-863-81	s	RES, CHIP 100 (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R319	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-860-81	s	RES, CHIP 75 (1005)
R342	1-208-860-81	s	RES, CHIP 75 (1005)
R343	1-208-860-81	s	RES, CHIP 75 (1005)
R344	1-208-860-81	s	RES, CHIP 75 (1005)
R345	1-220-884-81	s	RES, CHIP 39 (1005)
R346	1-220-884-81	s	RES, CHIP 39 (1005)
R347	1-220-884-81	s	RES, CHIP 39 (1005)
R348	1-220-884-81	s	RES, CHIP 39 (1005)
R349	1-208-863-81	s	RES, CHIP 100 (1005)
R350	1-208-863-81	s	RES, CHIP 100 (1005)
R351	1-208-863-81	s	RES, CHIP 100 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R370	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-208-860-81	s	RES, CHIP 75 (1005)
R374	1-208-860-81	s	RES, CHIP 75 (1005)
R375	1-208-860-81	s	RES, CHIP 75 (1005)
R376	1-208-860-81	s	RES, CHIP 75 (1005)
R377	1-220-884-81	s	RES, CHIP 39 (1005)
R378	1-220-884-81	s	RES, CHIP 39 (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R380	1-208-863-81	s	RES, CHIP 100 (1005)
R381	1-208-863-81	s	RES, CHIP 100 (1005)
R382	1-208-863-81	s	RES, CHIP 100 (1005)
R384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R413	1-208-884-81	s	RES, CHIP 750 (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-208-855-81	s	RES, CHIP 47 (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-989-11	s	RES, CHIP 1M (1005)
R420	1-218-989-11	s	RES, CHIP 1M (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-208-895-81	s	RES, CHIP 2.2K (1005)
R424	1-208-895-81	s	RES, CHIP 2.2K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-884-81	s	RES, CHIP 750 (1005)
R438	1-208-884-81	s	RES, CHIP 750 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-208-884-81	s	RES, CHIP 750 (1005)
R441	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R442	1-208-884-81	s	RES, CHIP 750 (1005)
R443	1-218-989-11	s	RES, CHIP 1M (1005)
R444	1-218-989-11	s	RES, CHIP 1M (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R447	1-208-895-81	s	RES, CHIP 2.2K (1005)
R448	1-208-895-81	s	RES, CHIP 2.2K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-884-81	s	RES, CHIP 750 (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-989-11	s	RES, CHIP 1M (1005)
R520	1-218-989-11	s	RES, CHIP 1M (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-895-81	s	RES, CHIP 2.2K (1005)
R524	1-208-895-81	s	RES, CHIP 2.2K (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R535	1-208-863-81	s	RES, CHIP 100 (1005)
R536	1-208-863-81	s	RES, CHIP 100 (1005)
R537	1-208-884-81	s	RES, CHIP 750 (1005)
R538	1-208-884-81	s	RES, CHIP 750 (1005)
R539	1-208-855-81	s	RES, CHIP 47 (1005)
R540	1-208-884-81	s	RES, CHIP 750 (1005)
R541	1-208-855-81	s	RES, CHIP 47 (1005)
R542	1-208-884-81	s	RES, CHIP 750 (1005)
R543	1-218-989-11	s	RES, CHIP 1M (1005)
R544	1-218-989-11	s	RES, CHIP 1M (1005)
R545	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R546	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R547	1-208-895-81	s	RES, CHIP 2.2K (1005)
R548	1-208-895-81	s	RES, CHIP 2.2K (1005)
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R613	1-208-884-81	s	RES, CHIP 750 (1005)
R614	1-208-884-81	s	RES, CHIP 750 (1005)
R615	1-208-855-81	s	RES, CHIP 47 (1005)
R616	1-208-884-81	s	RES, CHIP 750 (1005)
R617	1-208-855-81	s	RES, CHIP 47 (1005)
R618	1-208-884-81	s	RES, CHIP 750 (1005)
R619	1-218-989-11	s	RES, CHIP 1M (1005)
R620	1-218-989-11	s	RES, CHIP 1M (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-208-895-81	s	RES, CHIP 2.2K (1005)
R624	1-208-895-81	s	RES, CHIP 2.2K (1005)
R625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R630	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-863-81	s	RES, CHIP 100 (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R637	1-208-884-81	s	RES, CHIP 750 (1005)
R638	1-208-884-81	s	RES, CHIP 750 (1005)
R639	1-208-855-81	s	RES, CHIP 47 (1005)
R640	1-208-884-81	s	RES, CHIP 750 (1005)
R641	1-208-855-81	s	RES, CHIP 47 (1005)
R642	1-208-884-81	s	RES, CHIP 750 (1005)
R643	1-218-989-11	s	RES, CHIP 1M (1005)
R644	1-218-989-11	s	RES, CHIP 1M (1005)
R645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R647	1-208-895-81	s	RES, CHIP 2.2K (1005)
R648	1-208-895-81	s	RES, CHIP 2.2K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R713	1-208-884-81	s	RES, CHIP 750 (1005)
R714	1-208-884-81	s	RES, CHIP 750 (1005)
R715	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R716	1-208-884-81	s	RES, CHIP 750 (1005)
R717	1-208-855-81	s	RES, CHIP 47 (1005)
R718	1-208-884-81	s	RES, CHIP 750 (1005)
R719	1-218-989-11	s	RES, CHIP 1M (1005)
R720	1-218-989-11	s	RES, CHIP 1M (1005)
R721	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R723	1-208-895-81	s	RES, CHIP 2.2K (1005)
R724	1-208-895-81	s	RES, CHIP 2.2K (1005)
R725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R729	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R733	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-884-81	s	RES, CHIP 750 (1005)
R738	1-208-884-81	s	RES, CHIP 750 (1005)
R739	1-208-855-81	s	RES, CHIP 47 (1005)
R740	1-208-884-81	s	RES, CHIP 750 (1005)
R741	1-208-855-81	s	RES, CHIP 47 (1005)
R742	1-208-884-81	s	RES, CHIP 750 (1005)
R743	1-218-989-11	s	RES, CHIP 1M (1005)
R744	1-218-989-11	s	RES, CHIP 1M (1005)
R745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-895-81	s	RES, CHIP 2.2K (1005)
R748	1-208-895-81	s	RES, CHIP 2.2K (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-208-863-81	s	RES, CHIP 100 (1005)
R812	1-208-863-81	s	RES, CHIP 100 (1005)
R813	1-208-884-81	s	RES, CHIP 750 (1005)
R814	1-208-884-81	s	RES, CHIP 750 (1005)
R815	1-208-855-81	s	RES, CHIP 47 (1005)
R816	1-208-884-81	s	RES, CHIP 750 (1005)
R817	1-208-855-81	s	RES, CHIP 47 (1005)
R818	1-208-884-81	s	RES, CHIP 750 (1005)
R819	1-218-989-11	s	RES, CHIP 1M (1005)
R820	1-218-989-11	s	RES, CHIP 1M (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-208-895-81	s	RES, CHIP 2.2K (1005)
R824	1-208-895-81	s	RES, CHIP 2.2K (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R835	1-208-863-81	s	RES, CHIP 100 (1005)
R836	1-208-863-81	s	RES, CHIP 100 (1005)
R837	1-208-884-81	s	RES, CHIP 750 (1005)
R838	1-208-884-81	s	RES, CHIP 750 (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-208-884-81	s	RES, CHIP 750 (1005)
R841	1-208-855-81	s	RES, CHIP 47 (1005)
R842	1-208-884-81	s	RES, CHIP 750 (1005)
R843	1-218-989-11	s	RES, CHIP 1M (1005)
R844	1-218-989-11	s	RES, CHIP 1M (1005)
R845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R846	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R847	1-208-895-81	s	RES, CHIP 2.2K (1005)
R848	1-208-895-81	s	RES, CHIP 2.2K (1005)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
X101	1-813-649-11	s	OSCILLATOR, CRYSTAL (20MHZ)
X401	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X402	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X403	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X404	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X501	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X502	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X503	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X504	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X601	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X602	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X603	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X604	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X701	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X702	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X703	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X704	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X801	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X802	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X803	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X804	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)

CNI-37 BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
10pcs	2-655-586-01	s	SCREW +B M2.6 EG
10pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C7	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C8	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C13	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C14	1-114-533-21	s	CAP, ELECT 330MF
C15	1-114-533-21	s	CAP, ELECT 330MF
C16	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C17	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C18	1-114-533-21	s	CAP, ELECT 330MF
C19	1-114-533-21	s	CAP, ELECT 330MF
C20	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C21	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C22	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C23	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C24	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C25	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C26	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C27	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C28	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C29	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C81	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C82	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C83	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C84	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C85	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C86	1-114-533-21	s	CAP, ELECT 330MF
C87	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C88	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C90	1-114-533-21	s	CAP, ELECT 330MF
C91	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C112	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C136	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C139	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C140	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C141	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C203	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C204	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C207	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C209	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C210	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C212	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C214	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C215	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C217	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C218	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C219	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C220	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C221	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C222	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C223	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C224	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C225	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C226	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C229	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C232	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C244	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C245	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C246	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C248	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C254	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C255	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C256	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C257	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C258	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C259	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C260	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C261	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C262	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C263	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C264	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C268	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C269	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C271	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C272	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C275	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C281	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C282	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C283	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C284	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C285	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C286	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C287	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C288	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C289	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C290	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C291	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C292	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C293	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C294	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C297	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C299	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C301	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C304	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C305	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C314	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C315	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C317	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C318	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C320	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C321	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C323	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C324	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C325	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C326	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C335	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C341	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C343	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C352	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C353	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C354	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C355	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C356	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C357	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C358	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C359	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C360	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C361	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C362	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C363	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C364	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C365	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C366	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C371	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C372	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C375	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C381	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C382	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C383	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C384	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C385	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C386	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C387	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C388	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C389	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C390	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C391	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C392	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C393	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C394	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C397	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C402	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C405	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C406	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C409	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C412	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C416	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C420	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C421	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C422	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C433	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C434	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C437	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C439	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C440	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C441	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C442	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C445	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C446	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C449	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C451	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C452	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C455	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C456	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C459	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C460	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C461	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C462	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C467	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C468	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C469	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C470	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C471	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C472	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C473	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C474	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C477	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C479	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C480	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C501	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C502	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C505	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C506	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C508	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C509	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C512	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C515	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C516	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C520	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C521	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C522	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C533	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C534	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C537	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C539	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C540	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C541	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C542	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C545	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C546	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C548	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C549	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C551	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C552	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C555	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C556	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C559	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C560	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C561	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C562	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C567	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C568	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C569	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C570	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C571	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C572	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C573	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C574	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C576	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C577	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C579	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C580	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C601	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C602	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C605	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C606	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C609	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C612	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C616	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C619	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C620	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C621	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C622	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C628	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C629	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C630	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C631	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C632	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C633	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C634	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C636	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C637	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C639	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C640	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C641	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C642	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C645	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C646	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C651	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C652	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C655	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C656	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C658	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C659	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C660	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C661	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C662	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C664	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C666	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C667	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C668	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C669	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C670	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C671	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C672	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C673	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C674	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C676	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C677	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C680	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C701	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C702	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C705	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C706	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C719	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C720	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C721	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C722	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C729	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C730	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C732	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C733	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C734	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C737	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C740	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C741	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C742	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C745	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C746	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C756	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C759	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C760	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C761	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C762	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C767	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C768	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C769	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C770	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C771	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C772	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C773	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C774	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C776	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C777	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C780	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C805	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C806	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C819	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C820	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C821	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C822	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C827	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C828	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C829	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C830	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C831	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C832	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C833	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C834	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C837	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C839	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C840	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C841	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C842	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C845	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C846	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C849	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C852	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C856	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C859	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C860	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C861	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C862	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C868	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C869	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C870	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C871	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C872	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C873	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C874	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C876	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C877	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C880	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN17	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN19	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN101	1-784-254-21	s	CONNECTOR 10P
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
D5	8-719-072-43	s	DIODE RB050L-40TE25
D6	8-719-072-43	s	DIODE RB050L-40TE25
D81	8-719-048-17	s	DIODE MBRS130LT3
D82	8-719-069-28	s	DI 1SS400FJTE61
D101	6-502-598-01	s	DI SML-D12U8WT86
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
D601	6-502-197-01	s	DI SML-D12M8WT86SM
D602	6-502-197-01	s	DI SML-D12M8WT86SM
D603	6-502-197-01	s	DI SML-D12M8WT86SM
D604	6-502-197-01	s	DI SML-D12M8WT86SM
D701	6-502-197-01	s	DI SML-D12M8WT86SM
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-197-01	s	DI SML-D12M8WT86SM
D802	6-502-197-01	s	DI SML-D12M8WT86SM
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB81	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC81	8-759-646-33	s	IC MAX1627ESA+TG068
IC102	6-704-641-01	s	IC R3112N111A-TR-FA
IC103	6-704-643-01	s	IC R3112N221A-TR-FA
IC401	6-715-350-01	s	IC GS2965-INTE3
IC402	6-715-350-01	s	IC GS2965-INTE3
IC403	6-715-350-01	s	IC GS2965-INTE3
IC404	6-715-350-01	s	IC GS2965-INTE3
IC501	6-715-350-01	s	IC GS2965-INTE3
IC502	6-715-350-01	s	IC GS2965-INTE3
IC503	6-715-350-01	s	IC GS2965-INTE3
IC504	6-715-350-01	s	IC GS2965-INTE3
IC601	6-715-350-01	s	IC GS2965-INTE3
IC602	6-715-350-01	s	IC GS2965-INTE3
IC603	6-715-350-01	s	IC GS2965-INTE3
IC604	6-715-350-01	s	IC GS2965-INTE3
IC701	6-715-350-01	s	IC GS2965-INTE3
IC702	6-715-350-01	s	IC GS2965-INTE3
IC703	6-715-350-01	s	IC GS2965-INTE3
IC704	6-715-350-01	s	IC GS2965-INTE3
IC801	6-715-350-01	s	IC GS2965-INTE3
IC802	6-715-350-01	s	IC GS2965-INTE3
IC803	6-715-350-01	s	IC GS2965-INTE3
IC804	6-715-350-01	s	IC GS2965-INTE3
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-419-491-21	s	COIL, CHOKE 10UH
L3	1-400-175-21	s	COIL, CHOKE 47UH
L4	1-419-823-21	s	COIL, CHOKE 33UH
L5	1-419-491-21	s	COIL, CHOKE 10UH
L6	1-419-491-21	s	COIL, CHOKE 10UH
L81	1-419-630-21	s	COIL, CHOKE 4.7UH
L82	1-400-175-21	s	COIL, CHOKE 47UH
L201	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L202	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L203	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L204	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L205	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L206	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L207	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L208	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L209	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L210	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L211	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L212	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L213	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L214	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L215	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L216	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L217	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L218	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L219	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L220	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L221	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L222	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L223	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L224	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L225	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L226	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L227	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L228	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L229	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L230	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L301	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L302	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L303	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L304	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L305	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L306	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L307	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L308	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L309	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L310	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L311	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L312	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L313	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L314	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L315	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L316	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L317	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L318	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L319	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L320	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L321	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L322	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L323	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L324	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L325	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L326	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L327	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L328	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L329	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L330	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L401	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L402	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L403	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L404	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L501	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L502	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L503	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L504	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L601	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L602	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L603	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L604	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L701	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L702	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L703	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L704	1-414-396-41	s	INDUCTOR (SMD) 4.7UH

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L801	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L802	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L803	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L804	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS2	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q7	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q8	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q9	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q10	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q81	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q701	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q702	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q703	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q704	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q801	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q802	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q803	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q804	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-208-871-81	s	RES, CHIP 220 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-919-81	s	RES, CHIP 22K (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R15	1-208-927-81	s	RES, CHIP 47K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-911-81	s	RES, CHIP 10K (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R22	1-208-863-81	s	RES, CHIP 100 (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-911-81	s	RES, CHIP 10K (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-903-81	s	RES, CHIP 4.7K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-927-81	s	RES, CHIP 47K (1005)
R35	1-208-903-81	s	RES, CHIP 4.7K (1005)
R36	1-208-943-81	s	RES, CHIP 220K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-943-81	s	RES, CHIP 220K (1005)
R39	1-208-943-81	s	RES, CHIP 220K (1005)
R40	1-208-927-81	s	RES, CHIP 47K (1005)
R41	1-208-903-81	s	RES, CHIP 4.7K (1005)
R42	1-208-943-81	s	RES, CHIP 220K (1005)
R43	1-208-927-81	s	RES, CHIP 47K (1005)
R44	1-208-943-81	s	RES, CHIP 220K (1005)
R45	1-208-935-81	s	RES, CHIP 100K (1005)
R46	1-208-927-81	s	RES, CHIP 47K (1005)
R47	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-927-81	s	RES, CHIP 47K (1005)
R49	1-208-919-81	s	RES, CHIP 22K (1005)
R50	1-208-871-81	s	RES, CHIP 220 (1005)
R51	1-208-871-81	s	RES, CHIP 220 (1005)
R52	1-208-943-81	s	RES, CHIP 220K (1005)
R53	1-208-927-81	s	RES, CHIP 47K (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-927-81	s	RES, CHIP 47K (1005)
R81	1-208-927-81	s	RES, CHIP 47K (1005)
R82	1-208-911-81	s	RES, CHIP 10K (1005)
R84	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-919-81	s	RES, CHIP 22K (1005)
R86	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R88	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R89	1-208-903-81	s	RES, CHIP 4.7K (1005)
R90	1-208-903-81	s	RES, CHIP 4.7K (1005)
R91	1-208-927-81	s	RES, CHIP 47K (1005)
R92	1-208-887-81	s	RES, CHIP 1.0K (1005)
R93	1-208-887-81	s	RES, CHIP 1.0K (1005)
R94	1-208-887-81	s	RES, CHIP 1.0K (1005)
R95	1-208-903-81	s	RES, CHIP 4.7K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R119	1-208-927-81	s	RES, CHIP 47K (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-220-878-81	s	RES, CHIP 22 (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-220-878-81	s	RES, CHIP 22 (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-220-878-81	s	RES, CHIP 22 (1005)
R162	1-220-878-81	s	RES, CHIP 22 (1005)
R163	1-220-878-81	s	RES, CHIP 22 (1005)
R164	1-220-878-81	s	RES, CHIP 22 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-878-81	s	RES, CHIP 22 (1005)
R167	1-220-878-81	s	RES, CHIP 22 (1005)
R168	1-208-927-81	s	RES, CHIP 47K (1005)
R169	1-208-927-81	s	RES, CHIP 47K (1005)
R170	1-208-927-81	s	RES, CHIP 47K (1005)
R171	1-208-927-81	s	RES, CHIP 47K (1005)
R172	1-208-927-81	s	RES, CHIP 47K (1005)
R173	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-860-81	s	RES, CHIP 75 (1005)
R206	1-208-860-81	s	RES, CHIP 75 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-220-884-81	s	RES, CHIP 39 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R211	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R215	1-208-863-81	s	RES, CHIP 100 (1005)
R216	1-208-863-81	s	RES, CHIP 100 (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R217	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)
R219	1-208-863-81	s	RES, CHIP 100 (1005)
R220	1-208-863-81	s	RES, CHIP 100 (1005)
R221	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-927-81	s	RES, CHIP 47K (1005)
R225	1-208-927-81	s	RES, CHIP 47K (1005)
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R234	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-860-81	s	RES, CHIP 75 (1005)
R244	1-208-860-81	s	RES, CHIP 75 (1005)
R245	1-220-884-81	s	RES, CHIP 39 (1005)
R246	1-220-884-81	s	RES, CHIP 39 (1005)
R247	1-220-884-81	s	RES, CHIP 39 (1005)
R248	1-220-884-81	s	RES, CHIP 39 (1005)
R249	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-208-863-81	s	RES, CHIP 100 (1005)
R251	1-208-863-81	s	RES, CHIP 100 (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-863-81	s	RES, CHIP 100 (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R257	1-208-927-81	s	RES, CHIP 47K (1005)
R259	1-208-927-81	s	RES, CHIP 47K (1005)
R261	1-208-927-81	s	RES, CHIP 47K (1005)
R263	1-208-927-81	s	RES, CHIP 47K (1005)
R265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R268	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-860-81	s	RES, CHIP 75 (1005)
R274	1-208-860-81	s	RES, CHIP 75 (1005)
R275	1-208-860-81	s	RES, CHIP 75 (1005)
R276	1-208-860-81	s	RES, CHIP 75 (1005)
R277	1-220-884-81	s	RES, CHIP 39 (1005)
R278	1-220-884-81	s	RES, CHIP 39 (1005)
R279	1-208-863-81	s	RES, CHIP 100 (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-863-81	s	RES, CHIP 100 (1005)
R283	1-208-927-81	s	RES, CHIP 47K (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R285	1-208-927-81	s	RES, CHIP 47K (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-860-81	s	RES, CHIP 75 (1005)
R309	1-220-884-81	s	RES, CHIP 39 (1005)
R310	1-220-884-81	s	RES, CHIP 39 (1005)
R311	1-220-884-81	s	RES, CHIP 39 (1005)
R312	1-220-884-81	s	RES, CHIP 39 (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R314	1-208-863-81	s	RES, CHIP 100 (1005)
R315	1-208-863-81	s	RES, CHIP 100 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-863-81	s	RES, CHIP 100 (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R319	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R321	1-208-927-81	s	RES, CHIP 47K (1005)
R323	1-208-927-81	s	RES, CHIP 47K (1005)
R325	1-208-927-81	s	RES, CHIP 47K (1005)
R327	1-208-927-81	s	RES, CHIP 47K (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-860-81	s	RES, CHIP 75 (1005)
R342	1-208-860-81	s	RES, CHIP 75 (1005)
R343	1-208-860-81	s	RES, CHIP 75 (1005)
R344	1-208-860-81	s	RES, CHIP 75 (1005)
R345	1-220-884-81	s	RES, CHIP 39 (1005)
R346	1-220-884-81	s	RES, CHIP 39 (1005)
R347	1-220-884-81	s	RES, CHIP 39 (1005)
R348	1-220-884-81	s	RES, CHIP 39 (1005)
R349	1-208-863-81	s	RES, CHIP 100 (1005)
R350	1-208-863-81	s	RES, CHIP 100 (1005)
R351	1-208-863-81	s	RES, CHIP 100 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R357	1-208-927-81	s	RES, CHIP 47K (1005)
R359	1-208-927-81	s	RES, CHIP 47K (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R361	1-208-927-81	s	RES, CHIP 47K (1005)
R363	1-208-927-81	s	RES, CHIP 47K (1005)
R365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R370	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-208-860-81	s	RES, CHIP 75 (1005)
R374	1-208-860-81	s	RES, CHIP 75 (1005)
R375	1-208-860-81	s	RES, CHIP 75 (1005)
R376	1-208-860-81	s	RES, CHIP 75 (1005)
R377	1-220-884-81	s	RES, CHIP 39 (1005)
R378	1-220-884-81	s	RES, CHIP 39 (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R380	1-208-863-81	s	RES, CHIP 100 (1005)
R381	1-208-863-81	s	RES, CHIP 100 (1005)
R382	1-208-863-81	s	RES, CHIP 100 (1005)
R383	1-208-927-81	s	RES, CHIP 47K (1005)
R385	1-208-927-81	s	RES, CHIP 47K (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-871-81	s	RES, CHIP 220 (1005)
R417	1-208-855-81	s	RES, CHIP 47 (1005)
R418	1-208-871-81	s	RES, CHIP 220 (1005)
R419	1-208-959-81	s	RES, CHIP 1M (1005)
R420	1-208-959-81	s	RES, CHIP 1M (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-208-887-81	s	RES, CHIP 1.0K (1005)
R424	1-208-887-81	s	RES, CHIP 1.0K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-208-871-81	s	RES, CHIP 220 (1005)
R441	1-208-855-81	s	RES, CHIP 47 (1005)
R442	1-208-871-81	s	RES, CHIP 220 (1005)
R443	1-208-959-81	s	RES, CHIP 1M (1005)
R444	1-208-959-81	s	RES, CHIP 1M (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-871-81	s	RES, CHIP 220 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-871-81	s	RES, CHIP 220 (1005)
R519	1-208-959-81	s	RES, CHIP 1M (1005)
R520	1-208-959-81	s	RES, CHIP 1M (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-887-81	s	RES, CHIP 1.0K (1005)
R524	1-208-887-81	s	RES, CHIP 1.0K (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R535	1-208-863-81	s	RES, CHIP 100 (1005)
R536	1-208-863-81	s	RES, CHIP 100 (1005)
R539	1-208-855-81	s	RES, CHIP 47 (1005)
R540	1-208-871-81	s	RES, CHIP 220 (1005)
R541	1-208-855-81	s	RES, CHIP 47 (1005)
R542	1-208-871-81	s	RES, CHIP 220 (1005)
R543	1-208-959-81	s	RES, CHIP 1M (1005)
R544	1-208-959-81	s	RES, CHIP 1M (1005)
R545	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R546	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R547	1-208-887-81	s	RES, CHIP 1.0K (1005)
R548	1-208-887-81	s	RES, CHIP 1.0K (1005)
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R615	1-208-855-81	s	RES, CHIP 47 (1005)
R616	1-208-871-81	s	RES, CHIP 220 (1005)
R617	1-208-855-81	s	RES, CHIP 47 (1005)
R618	1-208-871-81	s	RES, CHIP 220 (1005)
R619	1-208-959-81	s	RES, CHIP 1M (1005)
R620	1-208-959-81	s	RES, CHIP 1M (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R624	1-208-887-81	s	RES, CHIP 1.0K (1005)
R625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R630	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-863-81	s	RES, CHIP 100 (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R639	1-208-855-81	s	RES, CHIP 47 (1005)
R640	1-208-871-81	s	RES, CHIP 220 (1005)
R641	1-208-855-81	s	RES, CHIP 47 (1005)
R642	1-208-871-81	s	RES, CHIP 220 (1005)
R643	1-208-959-81	s	RES, CHIP 1M (1005)
R644	1-208-959-81	s	RES, CHIP 1M (1005)
R645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R647	1-208-887-81	s	RES, CHIP 1.0K (1005)
R648	1-208-887-81	s	RES, CHIP 1.0K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R715	1-208-855-81	s	RES, CHIP 47 (1005)
R716	1-208-871-81	s	RES, CHIP 220 (1005)
R717	1-208-855-81	s	RES, CHIP 47 (1005)
R718	1-208-871-81	s	RES, CHIP 220 (1005)
R719	1-208-959-81	s	RES, CHIP 1M (1005)
R720	1-208-959-81	s	RES, CHIP 1M (1005)
R721	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R723	1-208-887-81	s	RES, CHIP 1.0K (1005)
R724	1-208-887-81	s	RES, CHIP 1.0K (1005)
R725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R729	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R733	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R739	1-208-855-81	s	RES, CHIP 47 (1005)
R740	1-208-871-81	s	RES, CHIP 220 (1005)
R741	1-208-855-81	s	RES, CHIP 47 (1005)
R742	1-208-871-81	s	RES, CHIP 220 (1005)
R743	1-208-959-81	s	RES, CHIP 1M (1005)
R744	1-208-959-81	s	RES, CHIP 1M (1005)
R745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-887-81	s	RES, CHIP 1.0K (1005)
R748	1-208-887-81	s	RES, CHIP 1.0K (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-208-863-81	s	RES, CHIP 100 (1005)
R812	1-208-863-81	s	RES, CHIP 100 (1005)
R815	1-208-855-81	s	RES, CHIP 47 (1005)
R816	1-208-871-81	s	RES, CHIP 220 (1005)
R817	1-208-855-81	s	RES, CHIP 47 (1005)
R818	1-208-871-81	s	RES, CHIP 220 (1005)
R819	1-208-959-81	s	RES, CHIP 1M (1005)
R820	1-208-959-81	s	RES, CHIP 1M (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-208-887-81	s	RES, CHIP 1.0K (1005)
R824	1-208-887-81	s	RES, CHIP 1.0K (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R835	1-208-863-81	s	RES, CHIP 100 (1005)
R836	1-208-863-81	s	RES, CHIP 100 (1005)

(CNI-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-208-871-81	s	RES, CHIP 220 (1005)
R841	1-208-855-81	s	RES, CHIP 47 (1005)
R842	1-208-871-81	s	RES, CHIP 220 (1005)
R843	1-208-959-81	s	RES, CHIP 1M (1005)
R844	1-208-959-81	s	RES, CHIP 1M (1005)
R845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R846	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R847	1-208-887-81	s	RES, CHIP 1.0K (1005)
R848	1-208-887-81	s	RES, CHIP 1.0K (1005)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP81	1-535-877-22	s	CHIP, CHECKER
TP82	1-535-877-22	s	CHIP, CHECKER
X101	1-813-649-11	s	OSCILLATOR, CRYSTAL (20MHZ)
X401	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X402	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X403	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X404	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X501	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X502	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X503	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X504	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X601	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X602	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X603	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X604	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X701	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X702	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X703	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X704	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X801	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X802	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X803	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X804	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)

CNI-37A BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-856-A	s	MOUNTED CIRCUIT BOARD, CNI-37A
20pcs	2-655-586-01	s	SCREW +B M2.6 EG
20pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-116-118-11	s	CAP, ELECT 47MF 105
C3	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C7	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C8	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C9	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C10	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C136	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C137	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C138	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C139	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C201	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C202	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C203	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C204	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C207	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C209	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C210	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C212	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C214	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C215	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C217	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C218	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C220	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C221	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C223	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C224	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C225	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C226	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C229	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C232	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C242	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C243	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C244	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C245	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C246	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C248	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C254	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C255	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C257	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C258	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C260	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C261	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C263	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C264	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C268	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C269	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C271	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C272	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C275	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C281	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C282	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C283	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C284	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C285	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C286	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C287	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C288	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C289	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C290	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C291	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C292	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C293	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C294	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C297	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C299	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C301	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C302	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C303	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C304	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C305	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C315	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C318	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C320	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C321	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C323	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C324	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C325	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C326	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C335	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C341	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C342	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C343	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C344	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C352	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C354	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C355	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C357	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C358	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C360	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C361	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C363	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C364	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C365	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C366	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C371	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C372	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C375	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C381	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C382	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C383	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C384	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C385	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C386	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C388	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C389	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C390	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C391	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C392	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C393	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C394	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C397	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C402	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C405	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C406	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C409	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C412	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C416	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C420	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C421	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C422	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C428	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C429	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C430	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C437	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C439	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C440	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C441	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C442	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C445	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C446	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C449	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C451	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C452	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C455	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C456	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C459	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C460	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C461	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C462	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C467	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C468	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C469	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C470	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C471	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C472	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C473	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C474	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C477	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C479	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C480	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C501	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C502	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C505	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C506	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C508	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C509	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C512	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C515	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C516	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C520	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C521	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C522	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C527	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C528	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C529	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C530	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C531	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C532	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C533	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C534	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C537	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C539	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C540	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C541	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C542	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C545	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C546	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C548	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C549	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C551	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C552	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C555	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C556	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C559	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C560	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C561	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C562	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C567	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C568	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C569	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C570	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C571	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C572	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C573	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C574	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C576	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C577	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C579	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C580	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C601	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C602	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C605	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C606	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C609	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C612	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C616	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C619	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C620	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C621	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C622	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C628	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C629	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C630	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C631	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C633	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C634	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C636	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C637	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C639	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C640	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C641	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C642	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C645	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C646	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C651	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C652	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C655	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C656	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C658	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C659	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C660	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C661	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C662	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C664	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C666	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C667	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C668	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C669	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C670	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C671	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C672	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C673	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C674	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C676	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C677	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C680	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C701	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C702	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C705	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C706	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C720	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C721	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C722	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C728	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C729	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C730	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C731	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C732	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C733	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C734	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C737	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C740	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C741	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C742	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C745	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C746	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C756	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C759	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C760	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C761	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C762	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C767	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C768	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C769	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C770	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C772	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C773	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C774	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C776	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C777	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C780	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C805	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C806	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C819	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C820	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C821	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C822	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C827	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C828	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C829	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C830	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C831	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C832	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C833	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C834	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C837	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C839	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C840	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C841	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C842	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C845	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C846	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C849	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C852	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C856	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C859	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C860	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C861	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C862	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C868	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C869	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C870	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C871	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C872	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C873	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C874	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C876	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C877	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C880	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
CN1	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN7	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN8	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN9	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN10	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN11	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN12	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN13	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN14	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
CN15	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN16	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN17	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN18	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN101	1-784-254-21	s	CONNECTOR 10P
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-069-28	s	DI 1SS400FJTE61
D101	6-502-598-01	s	DI SML-D12U8WT86
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
D601	6-502-197-01	s	DI SML-D12M8WT86SM
D602	6-502-197-01	s	DI SML-D12M8WT86SM
D603	6-502-197-01	s	DI SML-D12M8WT86SM
D604	6-502-197-01	s	DI SML-D12M8WT86SM
D701	6-502-197-01	s	DI SML-D12M8WT86SM
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-197-01	s	DI SML-D12M8WT86SM
D802	6-502-197-01	s	DI SML-D12M8WT86SM
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM
DD1	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC102	6-704-641-01	s	IC R3112N111A-TR-FA
IC401	6-715-350-01	s	IC GS2965-INTE3
IC402	6-715-350-01	s	IC GS2965-INTE3
IC403	6-715-350-01	s	IC GS2965-INTE3
IC404	6-715-350-01	s	IC GS2965-INTE3
IC501	6-715-350-01	s	IC GS2965-INTE3
IC502	6-715-350-01	s	IC GS2965-INTE3
IC503	6-715-350-01	s	IC GS2965-INTE3
IC504	6-715-350-01	s	IC GS2965-INTE3
IC601	6-715-350-01	s	IC GS2965-INTE3
IC602	6-715-350-01	s	IC GS2965-INTE3
IC603	6-715-350-01	s	IC GS2965-INTE3
IC604	6-715-350-01	s	IC GS2965-INTE3
IC701	6-715-350-01	s	IC GS2965-INTE3
IC702	6-715-350-01	s	IC GS2965-INTE3
IC703	6-715-350-01	s	IC GS2965-INTE3

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC704	6-715-350-01	s	IC GS2965-INTE3
IC801	6-715-350-01	s	IC GS2965-INTE3
IC802	6-715-350-01	s	IC GS2965-INTE3
IC803	6-715-350-01	s	IC GS2965-INTE3
IC804	6-715-350-01	s	IC GS2965-INTE3
L201	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L202	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L203	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L204	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L205	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L206	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L207	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L208	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L213	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L214	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L215	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L216	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L217	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L218	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L219	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L220	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L301	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L302	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L303	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L304	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L305	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L306	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L307	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L308	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L309	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L310	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L311	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L312	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L313	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L314	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L315	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L316	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L317	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L318	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L319	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L320	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L401	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L402	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L403	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L404	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L501	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L502	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L503	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L504	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L601	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L602	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L603	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L604	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L701	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L702	1-414-396-41	s	INDUCTOR (SMD) 4.7UH

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L703	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L704	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L801	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L802	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L803	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L804	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q701	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q702	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q703	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q704	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q801	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q802	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q803	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q804	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-887-81	s	RES, CHIP 1.0K (1005)
R7	1-208-895-81	s	RES, CHIP 2.2K (1005)
R8	1-208-911-81	s	RES, CHIP 10K (1005)
R9	1-208-927-81	s	RES, CHIP 47K (1005)
R10	1-208-887-81	s	RES, CHIP 1.0K (1005)
R11	1-208-887-81	s	RES, CHIP 1.0K (1005)
R12	1-208-887-81	s	RES, CHIP 1.0K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-903-81	s	RES, CHIP 4.7K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)
R119	1-220-878-81	s	RES, CHIP 22 (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-220-878-81	s	RES, CHIP 22 (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-220-878-81	s	RES, CHIP 22 (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-220-878-81	s	RES, CHIP 22 (1005)
R162	1-220-878-81	s	RES, CHIP 22 (1005)
R163	1-220-878-81	s	RES, CHIP 22 (1005)
R164	1-220-878-81	s	RES, CHIP 22 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-878-81	s	RES, CHIP 22 (1005)
R167	1-220-878-81	s	RES, CHIP 22 (1005)
R168	1-208-927-81	s	RES, CHIP 47K (1005)
R169	1-208-927-81	s	RES, CHIP 47K (1005)
R170	1-208-927-81	s	RES, CHIP 47K (1005)
R171	1-208-927-81	s	RES, CHIP 47K (1005)
R172	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-860-81	s	RES, CHIP 75 (1005)
R206	1-208-860-81	s	RES, CHIP 75 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-220-884-81	s	RES, CHIP 39 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R211	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R215	1-208-863-81	s	RES, CHIP 100 (1005)
R216	1-208-863-81	s	RES, CHIP 100 (1005)
R217	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)
R219	1-208-863-81	s	RES, CHIP 100 (1005)
R220	1-208-863-81	s	RES, CHIP 100 (1005)
R222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R234	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-860-81	s	RES, CHIP 75 (1005)
R244	1-208-860-81	s	RES, CHIP 75 (1005)
R245	1-220-884-81	s	RES, CHIP 39 (1005)
R246	1-220-884-81	s	RES, CHIP 39 (1005)
R247	1-220-884-81	s	RES, CHIP 39 (1005)
R248	1-220-884-81	s	RES, CHIP 39 (1005)
R249	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-208-863-81	s	RES, CHIP 100 (1005)
R251	1-208-863-81	s	RES, CHIP 100 (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-863-81	s	RES, CHIP 100 (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R268	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-860-81	s	RES, CHIP 75 (1005)
R274	1-208-860-81	s	RES, CHIP 75 (1005)
R275	1-208-860-81	s	RES, CHIP 75 (1005)
R276	1-208-860-81	s	RES, CHIP 75 (1005)
R277	1-220-884-81	s	RES, CHIP 39 (1005)
R278	1-220-884-81	s	RES, CHIP 39 (1005)
R279	1-208-863-81	s	RES, CHIP 100 (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-863-81	s	RES, CHIP 100 (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-860-81	s	RES, CHIP 75 (1005)
R309	1-220-884-81	s	RES, CHIP 39 (1005)
R310	1-220-884-81	s	RES, CHIP 39 (1005)
R311	1-220-884-81	s	RES, CHIP 39 (1005)
R312	1-220-884-81	s	RES, CHIP 39 (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R314	1-208-863-81	s	RES, CHIP 100 (1005)
R315	1-208-863-81	s	RES, CHIP 100 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-863-81	s	RES, CHIP 100 (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R319	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-860-81	s	RES, CHIP 75 (1005)
R342	1-208-860-81	s	RES, CHIP 75 (1005)
R343	1-208-860-81	s	RES, CHIP 75 (1005)
R344	1-208-860-81	s	RES, CHIP 75 (1005)
R345	1-220-884-81	s	RES, CHIP 39 (1005)
R346	1-220-884-81	s	RES, CHIP 39 (1005)
R347	1-220-884-81	s	RES, CHIP 39 (1005)
R348	1-220-884-81	s	RES, CHIP 39 (1005)
R349	1-208-863-81	s	RES, CHIP 100 (1005)
R350	1-208-863-81	s	RES, CHIP 100 (1005)
R351	1-208-863-81	s	RES, CHIP 100 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R370	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-208-860-81	s	RES, CHIP 75 (1005)
R374	1-208-860-81	s	RES, CHIP 75 (1005)
R375	1-208-860-81	s	RES, CHIP 75 (1005)
R376	1-208-860-81	s	RES, CHIP 75 (1005)
R377	1-220-884-81	s	RES, CHIP 39 (1005)
R378	1-220-884-81	s	RES, CHIP 39 (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R380	1-208-863-81	s	RES, CHIP 100 (1005)
R381	1-208-863-81	s	RES, CHIP 100 (1005)
R382	1-208-863-81	s	RES, CHIP 100 (1005)
R384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R413	1-208-884-81	s	RES, CHIP 750 (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-208-855-81	s	RES, CHIP 47 (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-989-11	s	RES, CHIP 1M (1005)
R420	1-218-989-11	s	RES, CHIP 1M (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-208-895-81	s	RES, CHIP 2.2K (1005)
R424	1-208-895-81	s	RES, CHIP 2.2K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R437	1-208-884-81	s	RES, CHIP 750 (1005)
R438	1-208-884-81	s	RES, CHIP 750 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-208-884-81	s	RES, CHIP 750 (1005)
R441	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R442	1-208-884-81	s	RES, CHIP 750 (1005)
R443	1-218-989-11	s	RES, CHIP 1M (1005)
R444	1-218-989-11	s	RES, CHIP 1M (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R447	1-208-895-81	s	RES, CHIP 2.2K (1005)
R448	1-208-895-81	s	RES, CHIP 2.2K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R513	1-208-884-81	s	RES, CHIP 750 (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-989-11	s	RES, CHIP 1M (1005)
R520	1-218-989-11	s	RES, CHIP 1M (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-895-81	s	RES, CHIP 2.2K (1005)
R524	1-208-895-81	s	RES, CHIP 2.2K (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R535	1-208-863-81	s	RES, CHIP 100 (1005)
R536	1-208-863-81	s	RES, CHIP 100 (1005)
R537	1-208-884-81	s	RES, CHIP 750 (1005)
R538	1-208-884-81	s	RES, CHIP 750 (1005)
R539	1-208-855-81	s	RES, CHIP 47 (1005)
R540	1-208-884-81	s	RES, CHIP 750 (1005)
R541	1-208-855-81	s	RES, CHIP 47 (1005)
R542	1-208-884-81	s	RES, CHIP 750 (1005)
R543	1-218-989-11	s	RES, CHIP 1M (1005)
R544	1-218-989-11	s	RES, CHIP 1M (1005)
R545	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R546	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R547	1-208-895-81	s	RES, CHIP 2.2K (1005)
R548	1-208-895-81	s	RES, CHIP 2.2K (1005)
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R613	1-208-884-81	s	RES, CHIP 750 (1005)
R614	1-208-884-81	s	RES, CHIP 750 (1005)
R615	1-208-855-81	s	RES, CHIP 47 (1005)
R616	1-208-884-81	s	RES, CHIP 750 (1005)
R617	1-208-855-81	s	RES, CHIP 47 (1005)
R618	1-208-884-81	s	RES, CHIP 750 (1005)
R619	1-218-989-11	s	RES, CHIP 1M (1005)
R620	1-218-989-11	s	RES, CHIP 1M (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-208-895-81	s	RES, CHIP 2.2K (1005)
R624	1-208-895-81	s	RES, CHIP 2.2K (1005)
R625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R630	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-863-81	s	RES, CHIP 100 (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R637	1-208-884-81	s	RES, CHIP 750 (1005)
R638	1-208-884-81	s	RES, CHIP 750 (1005)
R639	1-208-855-81	s	RES, CHIP 47 (1005)
R640	1-208-884-81	s	RES, CHIP 750 (1005)
R641	1-208-855-81	s	RES, CHIP 47 (1005)
R642	1-208-884-81	s	RES, CHIP 750 (1005)
R643	1-218-989-11	s	RES, CHIP 1M (1005)
R644	1-218-989-11	s	RES, CHIP 1M (1005)
R645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R647	1-208-895-81	s	RES, CHIP 2.2K (1005)
R648	1-208-895-81	s	RES, CHIP 2.2K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R713	1-208-884-81	s	RES, CHIP 750 (1005)
R714	1-208-884-81	s	RES, CHIP 750 (1005)
R715	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R716	1-208-884-81	s	RES, CHIP 750 (1005)
R717	1-208-855-81	s	RES, CHIP 47 (1005)
R718	1-208-884-81	s	RES, CHIP 750 (1005)
R719	1-218-989-11	s	RES, CHIP 1M (1005)
R720	1-218-989-11	s	RES, CHIP 1M (1005)
R721	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R723	1-208-895-81	s	RES, CHIP 2.2K (1005)
R724	1-208-895-81	s	RES, CHIP 2.2K (1005)
R725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R729	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R733	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-884-81	s	RES, CHIP 750 (1005)
R738	1-208-884-81	s	RES, CHIP 750 (1005)
R739	1-208-855-81	s	RES, CHIP 47 (1005)
R740	1-208-884-81	s	RES, CHIP 750 (1005)
R741	1-208-855-81	s	RES, CHIP 47 (1005)
R742	1-208-884-81	s	RES, CHIP 750 (1005)
R743	1-218-989-11	s	RES, CHIP 1M (1005)
R744	1-218-989-11	s	RES, CHIP 1M (1005)
R745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-895-81	s	RES, CHIP 2.2K (1005)
R748	1-208-895-81	s	RES, CHIP 2.2K (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-208-863-81	s	RES, CHIP 100 (1005)
R812	1-208-863-81	s	RES, CHIP 100 (1005)
R813	1-208-884-81	s	RES, CHIP 750 (1005)
R814	1-208-884-81	s	RES, CHIP 750 (1005)
R815	1-208-855-81	s	RES, CHIP 47 (1005)
R816	1-208-884-81	s	RES, CHIP 750 (1005)
R817	1-208-855-81	s	RES, CHIP 47 (1005)
R818	1-208-884-81	s	RES, CHIP 750 (1005)
R819	1-218-989-11	s	RES, CHIP 1M (1005)
R820	1-218-989-11	s	RES, CHIP 1M (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-208-895-81	s	RES, CHIP 2.2K (1005)
R824	1-208-895-81	s	RES, CHIP 2.2K (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R835	1-208-863-81	s	RES, CHIP 100 (1005)
R836	1-208-863-81	s	RES, CHIP 100 (1005)
R837	1-208-884-81	s	RES, CHIP 750 (1005)
R838	1-208-884-81	s	RES, CHIP 750 (1005)
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-208-884-81	s	RES, CHIP 750 (1005)
R841	1-208-855-81	s	RES, CHIP 47 (1005)
R842	1-208-884-81	s	RES, CHIP 750 (1005)
R843	1-218-989-11	s	RES, CHIP 1M (1005)
R844	1-218-989-11	s	RES, CHIP 1M (1005)
R845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R846	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R847	1-208-895-81	s	RES, CHIP 2.2K (1005)
R848	1-208-895-81	s	RES, CHIP 2.2K (1005)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
X101	1-813-649-11	s	OSCILLATOR, CRYSTAL (20MHZ)
X401	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X402	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X403	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X404	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X501	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X502	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X503	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X504	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X601	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X602	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X603	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X604	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X701	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X702	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X703	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X704	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X801	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X802	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X803	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X804	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)

CNI-37A BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-856-B	s	MOUNTED CIRCUIT BOARD, CNI-37A
10pcs	2-655-586-01	s	SCREW +B M2.6 EG
10pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C7	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C8	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C13	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C14	1-114-533-21	s	CAP, ELECT 330MF
C15	1-114-533-21	s	CAP, ELECT 330MF
C16	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C17	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C18	1-114-533-21	s	CAP, ELECT 330MF
C19	1-114-533-21	s	CAP, ELECT 330MF
C20	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C21	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C22	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C23	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C24	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C25	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C26	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C27	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C28	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C29	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C81	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C82	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C83	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C84	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C85	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C86	1-114-533-21	s	CAP, ELECT 330MF
C87	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C88	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C90	1-114-533-21	s	CAP, ELECT 330MF
C91	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C112	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C136	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C139	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C140	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C141	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C203	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C204	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C207	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C209	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C210	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C212	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C214	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C215	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C217	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C218	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C219	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C220	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C221	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C222	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C223	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C224	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C225	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C226	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C229	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C232	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C244	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C245	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C246	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C248	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C254	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C255	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C256	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C257	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C258	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C259	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C260	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C261	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C262	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C263	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C264	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C268	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C269	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C271	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C272	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C274	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C275	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C281	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C282	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C283	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C284	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C285	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C286	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C287	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C288	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C289	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C290	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C291	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C292	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C293	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C294	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C296	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C297	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C299	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C301	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C303	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C304	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C305	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C314	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C315	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C317	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C318	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C320	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C321	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C323	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C324	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C325	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C326	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C335	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C341	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C343	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C352	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C353	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C354	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C355	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C356	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C357	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C358	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C359	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C360	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C361	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C362	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C363	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C364	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C365	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C366	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C371	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C372	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C374	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C375	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C381	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C382	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C383	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C384	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C385	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C386	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C387	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C388	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C389	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C390	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C391	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C392	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C393	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C394	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C396	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C397	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C402	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C405	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C406	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C409	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C412	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C416	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C420	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C421	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C422	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C433	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C434	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C437	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C439	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C440	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C441	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C442	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C445	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C446	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C449	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C451	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C452	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C455	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C456	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C459	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C460	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C461	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C462	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C467	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C468	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C469	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C470	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C471	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C472	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C473	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C474	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C477	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C479	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C480	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C501	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C502	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C505	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C506	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C508	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C509	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C512	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C515	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C516	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C520	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C521	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C522	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C533	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C534	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C537	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C539	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C540	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C541	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C542	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C545	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C546	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C548	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C549	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C551	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C552	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C555	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C556	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C559	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C560	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C561	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C562	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C567	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C568	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C569	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C570	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C571	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C572	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C573	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C574	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C576	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C577	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C579	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C580	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C601	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C602	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C605	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C606	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C609	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C612	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C616	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C619	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C620	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C621	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C622	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C628	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C629	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C630	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C631	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C632	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C633	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C634	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C636	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C637	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C639	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C640	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C641	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C642	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C645	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C646	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C651	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C652	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C655	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C656	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C658	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C659	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C660	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C661	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C662	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C664	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C666	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C667	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C668	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C669	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C670	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C671	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C672	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C673	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C674	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C676	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C677	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C680	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C701	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C702	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C705	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C706	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C719	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C720	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C721	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C722	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C729	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C730	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C732	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C733	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C734	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C737	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C740	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C741	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C742	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C745	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C746	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C756	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C759	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C760	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C761	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C762	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C767	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C768	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C769	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C770	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C771	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C772	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C773	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C774	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C776	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C777	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C780	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C805	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C806	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C819	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C820	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C821	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C822	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C827	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C828	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C829	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C830	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C831	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C832	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C833	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C834	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C837	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C839	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C840	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C841	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C842	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C845	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C846	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C849	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C852	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C856	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C859	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C860	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C861	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C862	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C868	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C869	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C870	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C871	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C872	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C873	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C874	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C876	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C877	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C880	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN17	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN19	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN101	1-784-254-21	s	CONNECTOR 10P
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
D5	8-719-072-43	s	DIODE RB050L-40TE25
D6	8-719-072-43	s	DIODE RB050L-40TE25
D81	8-719-048-17	s	DIODE MBRS130LT3
D82	8-719-069-28	s	DI 1SS400FJTE61
D101	6-502-598-01	s	DI SML-D12U8WT86
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
D601	6-502-197-01	s	DI SML-D12M8WT86SM
D602	6-502-197-01	s	DI SML-D12M8WT86SM
D603	6-502-197-01	s	DI SML-D12M8WT86SM
D604	6-502-197-01	s	DI SML-D12M8WT86SM
D701	6-502-197-01	s	DI SML-D12M8WT86SM
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D801	6-502-197-01	s	DI SML-D12M8WT86SM
D802	6-502-197-01	s	DI SML-D12M8WT86SM
D803	6-502-197-01	s	DI SML-D12M8WT86SM
D804	6-502-197-01	s	DI SML-D12M8WT86SM

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB81	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC81	8-759-646-33	s	IC MAX1627ESA+TG068
IC102	6-704-641-01	s	IC R3112N111A-TR-FA
IC103	6-704-643-01	s	IC R3112N221A-TR-FA
IC401	6-715-350-01	s	IC GS2965-INTE3
IC402	6-715-350-01	s	IC GS2965-INTE3
IC403	6-715-350-01	s	IC GS2965-INTE3
IC404	6-715-350-01	s	IC GS2965-INTE3
IC501	6-715-350-01	s	IC GS2965-INTE3
IC502	6-715-350-01	s	IC GS2965-INTE3
IC503	6-715-350-01	s	IC GS2965-INTE3
IC504	6-715-350-01	s	IC GS2965-INTE3
IC601	6-715-350-01	s	IC GS2965-INTE3
IC602	6-715-350-01	s	IC GS2965-INTE3
IC603	6-715-350-01	s	IC GS2965-INTE3
IC604	6-715-350-01	s	IC GS2965-INTE3
IC701	6-715-350-01	s	IC GS2965-INTE3
IC702	6-715-350-01	s	IC GS2965-INTE3
IC703	6-715-350-01	s	IC GS2965-INTE3
IC704	6-715-350-01	s	IC GS2965-INTE3
IC801	6-715-350-01	s	IC GS2965-INTE3
IC802	6-715-350-01	s	IC GS2965-INTE3
IC803	6-715-350-01	s	IC GS2965-INTE3
IC804	6-715-350-01	s	IC GS2965-INTE3
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-419-491-21	s	COIL, CHOKE 10UH
L3	1-400-175-21	s	COIL, CHOKE 47UH
L4	1-419-823-21	s	COIL, CHOKE 33UH
L5	1-419-491-21	s	COIL, CHOKE 10UH
L6	1-419-491-21	s	COIL, CHOKE 10UH
L81	1-419-630-21	s	COIL, CHOKE 4.7UH
L82	1-400-175-21	s	COIL, CHOKE 47UH
L201	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L202	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L203	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L204	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L205	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L206	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L207	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L208	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L209	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L210	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L211	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L212	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L213	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L214	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L215	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L216	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L217	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L218	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L219	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L220	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L221	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L222	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L223	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L224	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L225	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L226	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L227	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L228	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L229	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L230	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L301	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L302	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L303	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L304	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L305	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L306	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L307	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L308	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L309	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L310	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L311	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L312	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L313	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L314	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L315	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L316	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L317	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L318	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L319	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L320	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L321	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L322	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L323	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L324	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L325	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L326	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L327	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L328	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L329	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L330	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L401	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L402	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L403	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L404	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L501	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L502	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L503	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L504	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L601	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L602	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L603	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L604	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L701	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L702	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L703	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L704	1-414-396-41	s	INDUCTOR (SMD) 4.7UH

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L801	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L802	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L803	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L804	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS2	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q7	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q8	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q9	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q10	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q81	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q701	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q702	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q703	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q704	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q801	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q802	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q803	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q804	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-208-871-81	s	RES, CHIP 220 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-919-81	s	RES, CHIP 22K (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R15	1-208-927-81	s	RES, CHIP 47K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-911-81	s	RES, CHIP 10K (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R22	1-208-863-81	s	RES, CHIP 100 (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-911-81	s	RES, CHIP 10K (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-903-81	s	RES, CHIP 4.7K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-927-81	s	RES, CHIP 47K (1005)
R35	1-208-903-81	s	RES, CHIP 4.7K (1005)
R36	1-208-943-81	s	RES, CHIP 220K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-943-81	s	RES, CHIP 220K (1005)
R39	1-208-943-81	s	RES, CHIP 220K (1005)
R40	1-208-927-81	s	RES, CHIP 47K (1005)
R41	1-208-903-81	s	RES, CHIP 4.7K (1005)
R42	1-208-943-81	s	RES, CHIP 220K (1005)
R43	1-208-927-81	s	RES, CHIP 47K (1005)
R44	1-208-943-81	s	RES, CHIP 220K (1005)
R45	1-208-935-81	s	RES, CHIP 100K (1005)
R46	1-208-927-81	s	RES, CHIP 47K (1005)
R47	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-927-81	s	RES, CHIP 47K (1005)
R49	1-208-919-81	s	RES, CHIP 22K (1005)
R50	1-208-871-81	s	RES, CHIP 220 (1005)
R51	1-208-871-81	s	RES, CHIP 220 (1005)
R52	1-208-943-81	s	RES, CHIP 220K (1005)
R53	1-208-927-81	s	RES, CHIP 47K (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-927-81	s	RES, CHIP 47K (1005)
R81	1-208-927-81	s	RES, CHIP 47K (1005)
R82	1-208-911-81	s	RES, CHIP 10K (1005)
R84	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-919-81	s	RES, CHIP 22K (1005)
R86	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R88	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R89	1-208-903-81	s	RES, CHIP 4.7K (1005)
R90	1-208-903-81	s	RES, CHIP 4.7K (1005)
R91	1-208-927-81	s	RES, CHIP 47K (1005)
R92	1-208-887-81	s	RES, CHIP 1.0K (1005)
R93	1-208-887-81	s	RES, CHIP 1.0K (1005)
R94	1-208-887-81	s	RES, CHIP 1.0K (1005)
R95	1-208-903-81	s	RES, CHIP 4.7K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R119	1-208-927-81	s	RES, CHIP 47K (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-220-878-81	s	RES, CHIP 22 (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-220-878-81	s	RES, CHIP 22 (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-220-878-81	s	RES, CHIP 22 (1005)
R162	1-220-878-81	s	RES, CHIP 22 (1005)
R163	1-220-878-81	s	RES, CHIP 22 (1005)
R164	1-220-878-81	s	RES, CHIP 22 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-878-81	s	RES, CHIP 22 (1005)
R167	1-220-878-81	s	RES, CHIP 22 (1005)
R168	1-208-927-81	s	RES, CHIP 47K (1005)
R169	1-208-927-81	s	RES, CHIP 47K (1005)
R170	1-208-927-81	s	RES, CHIP 47K (1005)
R171	1-208-927-81	s	RES, CHIP 47K (1005)
R172	1-208-927-81	s	RES, CHIP 47K (1005)
R173	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-860-81	s	RES, CHIP 75 (1005)
R206	1-208-860-81	s	RES, CHIP 75 (1005)
R207	1-208-860-81	s	RES, CHIP 75 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-220-884-81	s	RES, CHIP 39 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R211	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R213	1-208-863-81	s	RES, CHIP 100 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R215	1-208-863-81	s	RES, CHIP 100 (1005)
R216	1-208-863-81	s	RES, CHIP 100 (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R217	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)
R219	1-208-863-81	s	RES, CHIP 100 (1005)
R220	1-208-863-81	s	RES, CHIP 100 (1005)
R221	1-208-927-81	s	RES, CHIP 47K (1005)
R223	1-208-927-81	s	RES, CHIP 47K (1005)
R225	1-208-927-81	s	RES, CHIP 47K (1005)
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R234	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-860-81	s	RES, CHIP 75 (1005)
R244	1-208-860-81	s	RES, CHIP 75 (1005)
R245	1-220-884-81	s	RES, CHIP 39 (1005)
R246	1-220-884-81	s	RES, CHIP 39 (1005)
R247	1-220-884-81	s	RES, CHIP 39 (1005)
R248	1-220-884-81	s	RES, CHIP 39 (1005)
R249	1-208-863-81	s	RES, CHIP 100 (1005)
R250	1-208-863-81	s	RES, CHIP 100 (1005)
R251	1-208-863-81	s	RES, CHIP 100 (1005)
R252	1-208-863-81	s	RES, CHIP 100 (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-863-81	s	RES, CHIP 100 (1005)
R256	1-208-863-81	s	RES, CHIP 100 (1005)
R257	1-208-927-81	s	RES, CHIP 47K (1005)
R259	1-208-927-81	s	RES, CHIP 47K (1005)
R261	1-208-927-81	s	RES, CHIP 47K (1005)
R263	1-208-927-81	s	RES, CHIP 47K (1005)
R265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R268	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-860-81	s	RES, CHIP 75 (1005)
R274	1-208-860-81	s	RES, CHIP 75 (1005)
R275	1-208-860-81	s	RES, CHIP 75 (1005)
R276	1-208-860-81	s	RES, CHIP 75 (1005)
R277	1-220-884-81	s	RES, CHIP 39 (1005)
R278	1-220-884-81	s	RES, CHIP 39 (1005)
R279	1-208-863-81	s	RES, CHIP 100 (1005)
R280	1-208-863-81	s	RES, CHIP 100 (1005)
R281	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-208-863-81	s	RES, CHIP 100 (1005)
R283	1-208-927-81	s	RES, CHIP 47K (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R285	1-208-927-81	s	RES, CHIP 47K (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-860-81	s	RES, CHIP 75 (1005)
R309	1-220-884-81	s	RES, CHIP 39 (1005)
R310	1-220-884-81	s	RES, CHIP 39 (1005)
R311	1-220-884-81	s	RES, CHIP 39 (1005)
R312	1-220-884-81	s	RES, CHIP 39 (1005)
R313	1-208-863-81	s	RES, CHIP 100 (1005)
R314	1-208-863-81	s	RES, CHIP 100 (1005)
R315	1-208-863-81	s	RES, CHIP 100 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-863-81	s	RES, CHIP 100 (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R319	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R321	1-208-927-81	s	RES, CHIP 47K (1005)
R323	1-208-927-81	s	RES, CHIP 47K (1005)
R325	1-208-927-81	s	RES, CHIP 47K (1005)
R327	1-208-927-81	s	RES, CHIP 47K (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-860-81	s	RES, CHIP 75 (1005)
R342	1-208-860-81	s	RES, CHIP 75 (1005)
R343	1-208-860-81	s	RES, CHIP 75 (1005)
R344	1-208-860-81	s	RES, CHIP 75 (1005)
R345	1-220-884-81	s	RES, CHIP 39 (1005)
R346	1-220-884-81	s	RES, CHIP 39 (1005)
R347	1-220-884-81	s	RES, CHIP 39 (1005)
R348	1-220-884-81	s	RES, CHIP 39 (1005)
R349	1-208-863-81	s	RES, CHIP 100 (1005)
R350	1-208-863-81	s	RES, CHIP 100 (1005)
R351	1-208-863-81	s	RES, CHIP 100 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-863-81	s	RES, CHIP 100 (1005)
R354	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-863-81	s	RES, CHIP 100 (1005)
R356	1-208-863-81	s	RES, CHIP 100 (1005)
R357	1-208-927-81	s	RES, CHIP 47K (1005)
R359	1-208-927-81	s	RES, CHIP 47K (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R361	1-208-927-81	s	RES, CHIP 47K (1005)
R363	1-208-927-81	s	RES, CHIP 47K (1005)
R365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R370	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-208-860-81	s	RES, CHIP 75 (1005)
R374	1-208-860-81	s	RES, CHIP 75 (1005)
R375	1-208-860-81	s	RES, CHIP 75 (1005)
R376	1-208-860-81	s	RES, CHIP 75 (1005)
R377	1-220-884-81	s	RES, CHIP 39 (1005)
R378	1-220-884-81	s	RES, CHIP 39 (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R380	1-208-863-81	s	RES, CHIP 100 (1005)
R381	1-208-863-81	s	RES, CHIP 100 (1005)
R382	1-208-863-81	s	RES, CHIP 100 (1005)
R383	1-208-927-81	s	RES, CHIP 47K (1005)
R385	1-208-927-81	s	RES, CHIP 47K (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-871-81	s	RES, CHIP 220 (1005)
R417	1-208-855-81	s	RES, CHIP 47 (1005)
R418	1-208-871-81	s	RES, CHIP 220 (1005)
R419	1-208-959-81	s	RES, CHIP 1M (1005)
R420	1-208-959-81	s	RES, CHIP 1M (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-208-887-81	s	RES, CHIP 1.0K (1005)
R424	1-208-887-81	s	RES, CHIP 1.0K (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R435	1-208-863-81	s	RES, CHIP 100 (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R436	1-208-863-81	s	RES, CHIP 100 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-208-871-81	s	RES, CHIP 220 (1005)
R441	1-208-855-81	s	RES, CHIP 47 (1005)
R442	1-208-871-81	s	RES, CHIP 220 (1005)
R443	1-208-959-81	s	RES, CHIP 1M (1005)
R444	1-208-959-81	s	RES, CHIP 1M (1005)
R445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-871-81	s	RES, CHIP 220 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-871-81	s	RES, CHIP 220 (1005)
R519	1-208-959-81	s	RES, CHIP 1M (1005)
R520	1-208-959-81	s	RES, CHIP 1M (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-887-81	s	RES, CHIP 1.0K (1005)
R524	1-208-887-81	s	RES, CHIP 1.0K (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R535	1-208-863-81	s	RES, CHIP 100 (1005)
R536	1-208-863-81	s	RES, CHIP 100 (1005)
R539	1-208-855-81	s	RES, CHIP 47 (1005)
R540	1-208-871-81	s	RES, CHIP 220 (1005)
R541	1-208-855-81	s	RES, CHIP 47 (1005)
R542	1-208-871-81	s	RES, CHIP 220 (1005)
R543	1-208-959-81	s	RES, CHIP 1M (1005)
R544	1-208-959-81	s	RES, CHIP 1M (1005)
R545	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R546	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R547	1-208-887-81	s	RES, CHIP 1.0K (1005)
R548	1-208-887-81	s	RES, CHIP 1.0K (1005)
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R615	1-208-855-81	s	RES, CHIP 47 (1005)
R616	1-208-871-81	s	RES, CHIP 220 (1005)
R617	1-208-855-81	s	RES, CHIP 47 (1005)
R618	1-208-871-81	s	RES, CHIP 220 (1005)
R619	1-208-959-81	s	RES, CHIP 1M (1005)
R620	1-208-959-81	s	RES, CHIP 1M (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R624	1-208-887-81	s	RES, CHIP 1.0K (1005)
R625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R630	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-863-81	s	RES, CHIP 100 (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R639	1-208-855-81	s	RES, CHIP 47 (1005)
R640	1-208-871-81	s	RES, CHIP 220 (1005)
R641	1-208-855-81	s	RES, CHIP 47 (1005)
R642	1-208-871-81	s	RES, CHIP 220 (1005)
R643	1-208-959-81	s	RES, CHIP 1M (1005)
R644	1-208-959-81	s	RES, CHIP 1M (1005)
R645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R647	1-208-887-81	s	RES, CHIP 1.0K (1005)
R648	1-208-887-81	s	RES, CHIP 1.0K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-208-863-81	s	RES, CHIP 100 (1005)
R712	1-208-863-81	s	RES, CHIP 100 (1005)
R715	1-208-855-81	s	RES, CHIP 47 (1005)
R716	1-208-871-81	s	RES, CHIP 220 (1005)
R717	1-208-855-81	s	RES, CHIP 47 (1005)
R718	1-208-871-81	s	RES, CHIP 220 (1005)
R719	1-208-959-81	s	RES, CHIP 1M (1005)
R720	1-208-959-81	s	RES, CHIP 1M (1005)
R721	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R723	1-208-887-81	s	RES, CHIP 1.0K (1005)
R724	1-208-887-81	s	RES, CHIP 1.0K (1005)
R725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R729	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R733	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R739	1-208-855-81	s	RES, CHIP 47 (1005)
R740	1-208-871-81	s	RES, CHIP 220 (1005)
R741	1-208-855-81	s	RES, CHIP 47 (1005)
R742	1-208-871-81	s	RES, CHIP 220 (1005)
R743	1-208-959-81	s	RES, CHIP 1M (1005)
R744	1-208-959-81	s	RES, CHIP 1M (1005)
R745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-887-81	s	RES, CHIP 1.0K (1005)
R748	1-208-887-81	s	RES, CHIP 1.0K (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-208-863-81	s	RES, CHIP 100 (1005)
R812	1-208-863-81	s	RES, CHIP 100 (1005)
R815	1-208-855-81	s	RES, CHIP 47 (1005)
R816	1-208-871-81	s	RES, CHIP 220 (1005)
R817	1-208-855-81	s	RES, CHIP 47 (1005)
R818	1-208-871-81	s	RES, CHIP 220 (1005)
R819	1-208-959-81	s	RES, CHIP 1M (1005)
R820	1-208-959-81	s	RES, CHIP 1M (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-208-887-81	s	RES, CHIP 1.0K (1005)
R824	1-208-887-81	s	RES, CHIP 1.0K (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R835	1-208-863-81	s	RES, CHIP 100 (1005)
R836	1-208-863-81	s	RES, CHIP 100 (1005)

(CNI-37A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R839	1-208-855-81	s	RES, CHIP 47 (1005)
R840	1-208-871-81	s	RES, CHIP 220 (1005)
R841	1-208-855-81	s	RES, CHIP 47 (1005)
R842	1-208-871-81	s	RES, CHIP 220 (1005)
R843	1-208-959-81	s	RES, CHIP 1M (1005)
R844	1-208-959-81	s	RES, CHIP 1M (1005)
R845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R846	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R847	1-208-887-81	s	RES, CHIP 1.0K (1005)
R848	1-208-887-81	s	RES, CHIP 1.0K (1005)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP81	1-535-877-22	s	CHIP, CHECKER
TP82	1-535-877-22	s	CHIP, CHECKER
X101	1-813-649-11	s	OSCILLATOR, CRYSTAL (20MHZ)
X401	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X402	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X403	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X404	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X501	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X502	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X503	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X504	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X601	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X602	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X603	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X604	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X701	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X702	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X703	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X704	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X801	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X802	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X803	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X804	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)

CNO-37 BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-306-A	s	MOUNTED CIRCUIT BOARD, CNO-37
20pcs	2-655-586-01	s	SCREW +B M2.6 EG
20pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C3	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C5	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C106	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C109	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C110	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C111	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C112	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C113	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C114	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C127	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C128	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C129	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C130	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C131	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C132	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C133	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C134	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C135	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C136	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C139	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C140	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C141	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C142	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C145	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C146	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C147	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C148	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C149	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C150	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C153	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C154	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C157	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C158	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C159	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C160	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C163	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C164	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C165	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C166	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C167	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C168	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C169	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C170	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C171	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C172	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C209	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C210	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C212	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C213	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C214	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C227	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C229	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C230	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C232	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C233	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C234	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C235	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C236	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C237	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C238	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C239	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C240	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C245	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C246	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C248	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C254	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C257	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C258	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C259	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C260	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C263	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C264	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C267	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C268	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C271	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C272	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C309	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C310	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C314	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C327	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C330	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C333	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C334	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C335	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C336	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C337	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C338	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C339	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C340	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C341	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C345	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C346	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C353	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C354	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C357	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C358	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C359	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C360	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C363	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C364	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C365	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C366	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C367	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C370	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C371	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C372	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C406	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C409	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C410	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C412	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C413	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C414	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C427	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C428	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C429	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C430	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C431	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C432	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C433	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C434	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C435	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C436	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C437	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C438	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C439	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C440	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C441	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C442	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C445	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C446	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C447	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C449	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C450	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C453	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C454	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C457	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C458	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C459	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C460	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C463	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C464	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C465	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C466	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C467	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C468	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C469	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C470	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C471	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C472	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C506	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C509	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C510	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C511	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C512	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C513	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C514	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C527	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C528	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C529	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C530	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C531	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C532	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C533	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C534	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C535	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C536	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C537	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C538	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C539	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C540	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C541	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C542	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C545	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C546	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C547	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C548	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C549	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C550	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C553	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C554	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C557	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C558	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C559	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C560	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C563	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C564	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C565	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C566	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C567	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C568	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C569	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C570	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C571	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C572	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN7	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN8	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN9	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN10	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN11	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN12	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN13	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN14	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN15	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN16	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN17	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN18	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D101	6-502-197-01	s	DI SML-D12M8WT86SM
D102	6-502-197-01	s	DI SML-D12M8WT86SM
D103	6-502-197-01	s	DI SML-D12M8WT86SM
D104	6-502-197-01	s	DI SML-D12M8WT86SM
D201	6-502-197-01	s	DI SML-D12M8WT86SM
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D204	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
DD1	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC101	6-713-089-01	s	IC GS2975ACNE3
IC102	6-713-089-01	s	IC GS2975ACNE3
IC103	6-713-192-01	s	IC GS2978-CNE3
IC104	6-713-192-01	s	IC GS2978-CNE3
IC105	6-713-089-01	s	IC GS2975ACNE3
IC106	6-713-089-01	s	IC GS2975ACNE3
IC107	6-713-192-01	s	IC GS2978-CNE3
IC108	6-713-192-01	s	IC GS2978-CNE3
IC201	6-713-089-01	s	IC GS2975ACNE3
IC202	6-713-089-01	s	IC GS2975ACNE3
IC203	6-713-192-01	s	IC GS2978-CNE3
IC204	6-713-192-01	s	IC GS2978-CNE3
IC205	6-713-089-01	s	IC GS2975ACNE3
IC206	6-713-089-01	s	IC GS2975ACNE3
IC207	6-713-192-01	s	IC GS2978-CNE3
IC208	6-713-192-01	s	IC GS2978-CNE3
IC301	6-713-089-01	s	IC GS2975ACNE3
IC302	6-713-089-01	s	IC GS2975ACNE3
IC303	6-713-192-01	s	IC GS2978-CNE3
IC304	6-713-192-01	s	IC GS2978-CNE3
IC305	6-713-089-01	s	IC GS2975ACNE3
IC306	6-713-089-01	s	IC GS2975ACNE3
IC307	6-713-192-01	s	IC GS2978-CNE3
IC308	6-713-192-01	s	IC GS2978-CNE3
IC401	6-713-089-01	s	IC GS2975ACNE3
IC402	6-713-089-01	s	IC GS2975ACNE3
IC403	6-713-192-01	s	IC GS2978-CNE3
IC404	6-713-192-01	s	IC GS2978-CNE3
IC405	6-713-089-01	s	IC GS2975ACNE3
IC406	6-713-089-01	s	IC GS2975ACNE3
IC407	6-713-192-01	s	IC GS2978-CNE3
IC408	6-713-192-01	s	IC GS2978-CNE3
IC501	6-713-089-01	s	IC GS2975ACNE3
IC502	6-713-089-01	s	IC GS2975ACNE3
IC503	6-713-192-01	s	IC GS2978-CNE3
IC504	6-713-192-01	s	IC GS2978-CNE3
IC505	6-713-089-01	s	IC GS2975ACNE3
IC506	6-713-089-01	s	IC GS2975ACNE3
IC507	6-713-192-01	s	IC GS2978-CNE3
IC508	6-713-192-01	s	IC GS2978-CNE3
L101	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L102	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L103	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L104	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L105	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L106	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L109	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L110	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L111	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L112	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L113	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L114	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L115	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L116	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L117	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L118	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L119	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L120	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L121	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L122	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L123	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L124	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L201	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L202	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L203	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L204	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L205	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L206	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L208	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L209	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L210	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L211	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L212	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L213	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L214	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L215	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L216	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L217	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L218	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L219	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L220	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L221	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L222	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L223	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L224	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L301	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L302	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L303	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L304	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L305	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L306	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L309	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L310	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L311	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L312	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L313	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L314	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L315	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L316	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L317	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L318	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L319	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L320	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L321	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L322	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L323	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L324	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L401	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L402	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L403	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L404	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L405	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L406	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L407	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L408	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L409	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L410	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L411	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L412	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L413	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L414	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L415	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L416	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L417	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L418	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L419	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L420	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L421	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L422	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L423	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L424	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L501	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L502	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L503	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L504	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L505	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L506	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L507	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L508	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L509	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L510	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L511	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L512	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L513	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L514	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L515	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L516	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L517	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L518	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L519	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L520	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L521	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L522	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L523	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L524	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-887-81	s	RES, CHIP 1.0K (1005)
R6	1-208-895-81	s	RES, CHIP 2.2K (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R103	1-208-887-81	s	RES, CHIP 1.0K (1005)
R104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R105	1-208-887-81	s	RES, CHIP 1.0K (1005)
R106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R113	1-208-887-81	s	RES, CHIP 1.0K (1005)
R114	1-208-887-81	s	RES, CHIP 1.0K (1005)
R115	1-208-867-81	s	RES, CHIP 150 (1005)
R116	1-208-867-81	s	RES, CHIP 150 (1005)
R119	1-208-863-81	s	RES, CHIP 100 (1005)
R122	1-208-863-81	s	RES, CHIP 100 (1005)
R123	1-208-855-81	s	RES, CHIP 47 (1005)
R124	1-208-855-81	s	RES, CHIP 47 (1005)
R125	1-208-855-81	s	RES, CHIP 47 (1005)
R126	1-208-855-81	s	RES, CHIP 47 (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-208-884-81	s	RES, CHIP 750 (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-208-884-81	s	RES, CHIP 750 (1005)
R133	1-208-860-81	s	RES, CHIP 75 (1005)
R134	1-208-860-81	s	RES, CHIP 75 (1005)
R135	1-208-860-81	s	RES, CHIP 75 (1005)
R136	1-208-860-81	s	RES, CHIP 75 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-860-81	s	RES, CHIP 75 (1005)
R142	1-208-860-81	s	RES, CHIP 75 (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R146	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-208-887-81	s	RES, CHIP 1.0K (1005)
R149	1-208-887-81	s	RES, CHIP 1.0K (1005)
R150	1-208-887-81	s	RES, CHIP 1.0K (1005)
R151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-208-887-81	s	RES, CHIP 1.0K (1005)
R158	1-208-887-81	s	RES, CHIP 1.0K (1005)
R159	1-208-867-81	s	RES, CHIP 150 (1005)
R160	1-208-867-81	s	RES, CHIP 150 (1005)
R163	1-208-863-81	s	RES, CHIP 100 (1005)
R166	1-208-863-81	s	RES, CHIP 100 (1005)
R167	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R168	1-208-855-81	s	RES, CHIP 47 (1005)
R169	1-208-855-81	s	RES, CHIP 47 (1005)
R170	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R174	1-208-884-81	s	RES, CHIP 750 (1005)
R175	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R176	1-208-884-81	s	RES, CHIP 750 (1005)
R177	1-208-860-81	s	RES, CHIP 75 (1005)
R178	1-208-860-81	s	RES, CHIP 75 (1005)
R179	1-208-860-81	s	RES, CHIP 75 (1005)
R180	1-208-860-81	s	RES, CHIP 75 (1005)
R181	1-208-860-81	s	RES, CHIP 75 (1005)
R182	1-208-860-81	s	RES, CHIP 75 (1005)
R183	1-208-860-81	s	RES, CHIP 75 (1005)
R184	1-208-860-81	s	RES, CHIP 75 (1005)
R185	1-208-860-81	s	RES, CHIP 75 (1005)
R186	1-208-860-81	s	RES, CHIP 75 (1005)
R187	1-208-911-81	s	RES, CHIP 10K (1005)
R188	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-887-81	s	RES, CHIP 1.0K (1005)
R202	1-208-887-81	s	RES, CHIP 1.0K (1005)
R203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R215	1-208-867-81	s	RES, CHIP 150 (1005)
R216	1-208-867-81	s	RES, CHIP 150 (1005)
R219	1-208-863-81	s	RES, CHIP 100 (1005)
R222	1-208-863-81	s	RES, CHIP 100 (1005)
R223	1-208-855-81	s	RES, CHIP 47 (1005)
R224	1-208-855-81	s	RES, CHIP 47 (1005)
R225	1-208-855-81	s	RES, CHIP 47 (1005)
R226	1-208-855-81	s	RES, CHIP 47 (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-208-884-81	s	RES, CHIP 750 (1005)
R231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-208-884-81	s	RES, CHIP 750 (1005)
R233	1-208-860-81	s	RES, CHIP 75 (1005)
R234	1-208-860-81	s	RES, CHIP 75 (1005)
R235	1-208-860-81	s	RES, CHIP 75 (1005)
R236	1-208-860-81	s	RES, CHIP 75 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-887-81	s	RES, CHIP 1.0K (1005)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R249	1-208-887-81	s	RES, CHIP 1.0K (1005)
R250	1-208-887-81	s	RES, CHIP 1.0K (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R256	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R258	1-208-887-81	s	RES, CHIP 1.0K (1005)
R259	1-208-867-81	s	RES, CHIP 150 (1005)
R260	1-208-867-81	s	RES, CHIP 150 (1005)
R263	1-208-863-81	s	RES, CHIP 100 (1005)
R266	1-208-863-81	s	RES, CHIP 100 (1005)
R267	1-208-855-81	s	RES, CHIP 47 (1005)
R268	1-208-855-81	s	RES, CHIP 47 (1005)
R269	1-208-855-81	s	RES, CHIP 47 (1005)
R270	1-208-855-81	s	RES, CHIP 47 (1005)
R273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R274	1-208-884-81	s	RES, CHIP 750 (1005)
R275	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R276	1-208-884-81	s	RES, CHIP 750 (1005)
R277	1-208-860-81	s	RES, CHIP 75 (1005)
R278	1-208-860-81	s	RES, CHIP 75 (1005)
R279	1-208-860-81	s	RES, CHIP 75 (1005)
R280	1-208-860-81	s	RES, CHIP 75 (1005)
R281	1-208-860-81	s	RES, CHIP 75 (1005)
R282	1-208-860-81	s	RES, CHIP 75 (1005)
R283	1-208-860-81	s	RES, CHIP 75 (1005)
R284	1-208-860-81	s	RES, CHIP 75 (1005)
R285	1-208-860-81	s	RES, CHIP 75 (1005)
R286	1-208-860-81	s	RES, CHIP 75 (1005)
R287	1-208-911-81	s	RES, CHIP 10K (1005)
R288	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-887-81	s	RES, CHIP 1.0K (1005)
R302	1-208-887-81	s	RES, CHIP 1.0K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-887-81	s	RES, CHIP 1.0K (1005)
R306	1-208-887-81	s	RES, CHIP 1.0K (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R313	1-208-887-81	s	RES, CHIP 1.0K (1005)
R314	1-208-887-81	s	RES, CHIP 1.0K (1005)
R315	1-208-867-81	s	RES, CHIP 150 (1005)
R316	1-208-867-81	s	RES, CHIP 150 (1005)
R319	1-208-863-81	s	RES, CHIP 100 (1005)
R322	1-208-863-81	s	RES, CHIP 100 (1005)
R323	1-208-855-81	s	RES, CHIP 47 (1005)
R324	1-208-855-81	s	RES, CHIP 47 (1005)
R325	1-208-855-81	s	RES, CHIP 47 (1005)
R326	1-208-855-81	s	RES, CHIP 47 (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R330	1-208-884-81	s	RES, CHIP 750 (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-208-884-81	s	RES, CHIP 750 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-208-860-81	s	RES, CHIP 75 (1005)
R335	1-208-860-81	s	RES, CHIP 75 (1005)
R336	1-208-860-81	s	RES, CHIP 75 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-860-81	s	RES, CHIP 75 (1005)
R342	1-208-860-81	s	RES, CHIP 75 (1005)
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-887-81	s	RES, CHIP 1.0K (1005)
R346	1-208-887-81	s	RES, CHIP 1.0K (1005)
R347	1-208-887-81	s	RES, CHIP 1.0K (1005)
R348	1-208-887-81	s	RES, CHIP 1.0K (1005)
R349	1-208-887-81	s	RES, CHIP 1.0K (1005)
R350	1-208-887-81	s	RES, CHIP 1.0K (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-208-887-81	s	RES, CHIP 1.0K (1005)
R358	1-208-887-81	s	RES, CHIP 1.0K (1005)
R359	1-208-867-81	s	RES, CHIP 150 (1005)
R360	1-208-867-81	s	RES, CHIP 150 (1005)
R363	1-208-863-81	s	RES, CHIP 100 (1005)
R366	1-208-863-81	s	RES, CHIP 100 (1005)
R367	1-208-855-81	s	RES, CHIP 47 (1005)
R368	1-208-855-81	s	RES, CHIP 47 (1005)
R369	1-208-855-81	s	RES, CHIP 47 (1005)
R370	1-208-855-81	s	RES, CHIP 47 (1005)
R373	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R374	1-208-884-81	s	RES, CHIP 750 (1005)
R375	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R376	1-208-884-81	s	RES, CHIP 750 (1005)
R377	1-208-860-81	s	RES, CHIP 75 (1005)
R378	1-208-860-81	s	RES, CHIP 75 (1005)
R379	1-208-860-81	s	RES, CHIP 75 (1005)
R380	1-208-860-81	s	RES, CHIP 75 (1005)
R381	1-208-860-81	s	RES, CHIP 75 (1005)
R382	1-208-860-81	s	RES, CHIP 75 (1005)
R383	1-208-860-81	s	RES, CHIP 75 (1005)
R384	1-208-860-81	s	RES, CHIP 75 (1005)
R385	1-208-860-81	s	RES, CHIP 75 (1005)
R386	1-208-860-81	s	RES, CHIP 75 (1005)
R387	1-208-911-81	s	RES, CHIP 10K (1005)
R388	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-887-81	s	RES, CHIP 1.0K (1005)
R402	1-208-887-81	s	RES, CHIP 1.0K (1005)
R403	1-208-887-81	s	RES, CHIP 1.0K (1005)
R404	1-208-887-81	s	RES, CHIP 1.0K (1005)
R405	1-208-887-81	s	RES, CHIP 1.0K (1005)
R406	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R415	1-208-867-81	s	RES, CHIP 150 (1005)
R416	1-208-867-81	s	RES, CHIP 150 (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-208-863-81	s	RES, CHIP 100 (1005)
R423	1-208-855-81	s	RES, CHIP 47 (1005)
R424	1-208-855-81	s	RES, CHIP 47 (1005)
R425	1-208-855-81	s	RES, CHIP 47 (1005)
R426	1-208-855-81	s	RES, CHIP 47 (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-208-884-81	s	RES, CHIP 750 (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-884-81	s	RES, CHIP 750 (1005)
R433	1-208-860-81	s	RES, CHIP 75 (1005)
R434	1-208-860-81	s	RES, CHIP 75 (1005)
R435	1-208-860-81	s	RES, CHIP 75 (1005)
R436	1-208-860-81	s	RES, CHIP 75 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-860-81	s	RES, CHIP 75 (1005)
R442	1-208-860-81	s	RES, CHIP 75 (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R445	1-208-887-81	s	RES, CHIP 1.0K (1005)
R446	1-208-887-81	s	RES, CHIP 1.0K (1005)
R447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R450	1-208-887-81	s	RES, CHIP 1.0K (1005)
R451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R457	1-208-887-81	s	RES, CHIP 1.0K (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-867-81	s	RES, CHIP 150 (1005)
R460	1-208-867-81	s	RES, CHIP 150 (1005)
R463	1-208-863-81	s	RES, CHIP 100 (1005)
R466	1-208-863-81	s	RES, CHIP 100 (1005)
R467	1-208-855-81	s	RES, CHIP 47 (1005)
R468	1-208-855-81	s	RES, CHIP 47 (1005)
R469	1-208-855-81	s	RES, CHIP 47 (1005)
R470	1-208-855-81	s	RES, CHIP 47 (1005)
R473	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R474	1-208-884-81	s	RES, CHIP 750 (1005)
R475	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R476	1-208-884-81	s	RES, CHIP 750 (1005)
R477	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R478	1-208-860-81	s	RES, CHIP 75 (1005)
R479	1-208-860-81	s	RES, CHIP 75 (1005)
R480	1-208-860-81	s	RES, CHIP 75 (1005)
R481	1-208-860-81	s	RES, CHIP 75 (1005)
R482	1-208-860-81	s	RES, CHIP 75 (1005)
R483	1-208-860-81	s	RES, CHIP 75 (1005)
R484	1-208-860-81	s	RES, CHIP 75 (1005)
R485	1-208-860-81	s	RES, CHIP 75 (1005)
R486	1-208-860-81	s	RES, CHIP 75 (1005)
R487	1-208-911-81	s	RES, CHIP 10K (1005)
R488	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-887-81	s	RES, CHIP 1.0K (1005)
R502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R506	1-208-887-81	s	RES, CHIP 1.0K (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-208-887-81	s	RES, CHIP 1.0K (1005)
R514	1-208-887-81	s	RES, CHIP 1.0K (1005)
R515	1-208-867-81	s	RES, CHIP 150 (1005)
R516	1-208-867-81	s	RES, CHIP 150 (1005)
R519	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-863-81	s	RES, CHIP 100 (1005)
R523	1-208-855-81	s	RES, CHIP 47 (1005)
R524	1-208-855-81	s	RES, CHIP 47 (1005)
R525	1-208-855-81	s	RES, CHIP 47 (1005)
R526	1-208-855-81	s	RES, CHIP 47 (1005)
R529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-208-884-81	s	RES, CHIP 750 (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-208-884-81	s	RES, CHIP 750 (1005)
R533	1-208-860-81	s	RES, CHIP 75 (1005)
R534	1-208-860-81	s	RES, CHIP 75 (1005)
R535	1-208-860-81	s	RES, CHIP 75 (1005)
R536	1-208-860-81	s	RES, CHIP 75 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-860-81	s	RES, CHIP 75 (1005)
R542	1-208-860-81	s	RES, CHIP 75 (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-887-81	s	RES, CHIP 1.0K (1005)
R546	1-208-887-81	s	RES, CHIP 1.0K (1005)
R547	1-208-887-81	s	RES, CHIP 1.0K (1005)
R548	1-208-887-81	s	RES, CHIP 1.0K (1005)
R549	1-208-887-81	s	RES, CHIP 1.0K (1005)
R550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNO-37 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R559	1-208-867-81	s	RES, CHIP 150 (1005)
R560	1-208-867-81	s	RES, CHIP 150 (1005)
R563	1-208-863-81	s	RES, CHIP 100 (1005)
R566	1-208-863-81	s	RES, CHIP 100 (1005)
R567	1-208-855-81	s	RES, CHIP 47 (1005)
R568	1-208-855-81	s	RES, CHIP 47 (1005)
R569	1-208-855-81	s	RES, CHIP 47 (1005)
R570	1-208-855-81	s	RES, CHIP 47 (1005)
R573	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R574	1-208-884-81	s	RES, CHIP 750 (1005)
R575	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R576	1-208-884-81	s	RES, CHIP 750 (1005)
R577	1-208-860-81	s	RES, CHIP 75 (1005)
R578	1-208-860-81	s	RES, CHIP 75 (1005)
R579	1-208-860-81	s	RES, CHIP 75 (1005)
R580	1-208-860-81	s	RES, CHIP 75 (1005)
R581	1-208-860-81	s	RES, CHIP 75 (1005)
R582	1-208-860-81	s	RES, CHIP 75 (1005)
R583	1-208-860-81	s	RES, CHIP 75 (1005)
R584	1-208-860-81	s	RES, CHIP 75 (1005)
R585	1-208-860-81	s	RES, CHIP 75 (1005)
R586	1-208-860-81	s	RES, CHIP 75 (1005)
R587	1-208-911-81	s	RES, CHIP 10K (1005)
R588	1-208-911-81	s	RES, CHIP 10K (1005)
TP1	1-535-877-22	s	CHIP, CHECKER
X101	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X102	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X103	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X104	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X201	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X202	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X203	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X204	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X301	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X302	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X303	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X304	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X401	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X402	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X403	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X404	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X501	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X502	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X503	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X504	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)

CNO-37 BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-306-B	s	MOUNTED CIRCUIT BOARD, CNO-37
10pcs	2-655-586-01	s	SCREW +B M2.6 EG
10pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C7	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C8	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C13	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C14	1-114-533-21	s	CAP, ELECT 330MF
C15	1-114-533-21	s	CAP, ELECT 330MF
C16	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C17	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C18	1-114-533-21	s	CAP, ELECT 330MF
C19	1-114-533-21	s	CAP, ELECT 330MF
C20	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C21	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C22	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C23	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C24	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C25	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C26	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C27	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C28	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C29	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C81	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C82	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C83	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C84	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C85	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C86	1-114-533-21	s	CAP, ELECT 330MF
C87	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C88	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C90	1-114-533-21	s	CAP, ELECT 330MF
C91	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C112	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C136	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C139	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C140	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C141	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C206	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C209	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C210	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C213	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C215	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C216	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C220	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C224	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C225	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C226	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C232	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C233	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C235	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C236	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C237	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C239	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C244	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C245	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C246	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C247	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C248	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C249	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C250	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C251	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C252	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C253	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C254	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C257	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C258	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C260	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C261	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C263	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C264	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C265	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C267	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C268	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C271	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C272	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C273	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C274	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C280	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C281	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C282	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C283	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C284	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C285	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C286	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C287	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C288	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C289	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C290	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C291	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C292	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C293	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C294	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C295	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C296	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C306	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C309	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C310	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C315	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C316	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C319	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C320	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C324	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C325	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C326	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C332	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C333	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C335	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C336	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C337	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C338	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C339	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C340	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C341	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C343	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C345	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C346	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C347	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C348	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C349	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C350	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C351	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C352	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C353	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C354	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C357	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C358	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C360	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C361	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C363	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C364	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C367	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C368	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C371	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C372	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C373	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C374	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C380	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C381	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C383	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C384	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C385	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C386	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C387	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C388	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C389	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C390	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C391	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C392	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C393	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C394	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C395	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C396	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C406	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C409	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C410	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C413	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C416	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C420	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C423	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C424	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C425	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C426	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C430	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C432	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C433	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C434	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C435	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C436	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C437	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C438	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C439	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C440	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C441	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C442	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C443	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C444	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C445	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C446	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C447	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C448	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C449	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C450	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C451	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C452	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C453	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C454	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C457	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C458	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C459	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C460	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C461	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C462	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C463	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C464	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C467	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C468	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C470	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C471	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C472	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C473	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C474	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C480	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C481	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C482	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C483	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C484	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C485	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C486	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C487	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C488	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C489	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C490	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C491	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C492	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C493	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C494	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C495	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C496	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C506	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C509	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C510	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C512	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C513	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C515	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C516	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C520	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C523	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C524	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C525	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C526	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C532	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C533	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C535	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C536	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C539	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C540	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C541	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C542	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C543	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C544	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C545	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C546	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C547	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C548	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C549	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C550	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C551	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C552	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C553	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C554	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C557	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C558	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C560	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C561	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C562	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C563	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C564	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C567	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C568	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C569	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C571	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C572	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C573	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C574	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C577	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C579	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C580	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C581	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C583	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C584	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C585	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C586	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C587	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C588	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C589	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C590	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C591	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C592	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C593	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C594	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C595	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C596	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C604	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C605	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C606	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C609	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C610	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C613	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C616	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C619	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C620	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C623	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C624	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C625	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C626	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C632	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C633	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C634	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C635	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C636	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C637	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C638	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C639	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C640	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C641	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C642	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C643	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C644	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C645	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C646	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C647	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C648	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C649	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C650	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C651	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C652	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C653	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C654	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C657	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C658	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C659	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C660	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C661	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C662	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C663	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C664	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C666	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C667	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C668	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C669	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C670	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C671	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C672	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C673	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C674	1-164-856-81	s	CAP, CHIP CERAMIC 18PF CH 1005
C675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C676	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C677	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C679	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C680	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C681	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C682	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C683	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C684	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C685	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C686	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C687	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C688	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C689	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C690	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C691	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C692	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C693	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C694	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C695	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C696	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN17	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN19	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN101	1-784-254-21	s	CONNECTOR 10P
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
D5	8-719-072-43	s	DIODE RB050L-40TE25
D6	8-719-072-43	s	DIODE RB050L-40TE25
D81	8-719-048-17	s	DIODE MBRS130LT3
D82	8-719-069-28	s	DI 1SS400FJTE61
D101	6-502-598-01	s	DI SML-D12U8WT86
D201	6-502-197-01	s	DI SML-D12M8WT86SM
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D204	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
D601	6-502-197-01	s	DI SML-D12M8WT86SM
D602	6-502-197-01	s	DI SML-D12M8WT86SM
D603	6-502-197-01	s	DI SML-D12M8WT86SM
D604	6-502-197-01	s	DI SML-D12M8WT86SM
E1	1-535-877-22	s	CHIP, CHECKER

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB81	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC81	8-759-646-33	s	IC MAX1627ESA+TG068
IC102	6-704-641-01	s	IC R3112N111A-TR-FA
IC103	6-704-643-01	s	IC R3112N221A-TR-FA
IC201	6-715-350-01	s	IC GS2965-INTE3
IC202	6-715-350-01	s	IC GS2965-INTE3
IC203	6-713-192-11	s	IC GS2978-CNTE3Z
IC204	6-713-192-11	s	IC GS2978-CNTE3Z
IC205	6-715-350-01	s	IC GS2965-INTE3
IC206	6-715-350-01	s	IC GS2965-INTE3
IC207	6-713-192-11	s	IC GS2978-CNTE3Z
IC208	6-713-192-11	s	IC GS2978-CNTE3Z
IC301	6-715-350-01	s	IC GS2965-INTE3
IC302	6-715-350-01	s	IC GS2965-INTE3
IC303	6-713-192-11	s	IC GS2978-CNTE3Z
IC304	6-713-192-11	s	IC GS2978-CNTE3Z
IC305	6-715-350-01	s	IC GS2965-INTE3
IC306	6-715-350-01	s	IC GS2965-INTE3
IC307	6-713-192-11	s	IC GS2978-CNTE3Z
IC308	6-713-192-11	s	IC GS2978-CNTE3Z
IC401	6-715-350-01	s	IC GS2965-INTE3
IC402	6-715-350-01	s	IC GS2965-INTE3
IC403	6-713-192-11	s	IC GS2978-CNTE3Z
IC404	6-713-192-11	s	IC GS2978-CNTE3Z
IC405	6-715-350-01	s	IC GS2965-INTE3
IC406	6-715-350-01	s	IC GS2965-INTE3
IC407	6-713-192-11	s	IC GS2978-CNTE3Z
IC408	6-713-192-11	s	IC GS2978-CNTE3Z
IC501	6-715-350-01	s	IC GS2965-INTE3
IC502	6-715-350-01	s	IC GS2965-INTE3
IC503	6-713-192-11	s	IC GS2978-CNTE3Z
IC504	6-713-192-11	s	IC GS2978-CNTE3Z
IC505	6-715-350-01	s	IC GS2965-INTE3
IC506	6-715-350-01	s	IC GS2965-INTE3
IC507	6-713-192-11	s	IC GS2978-CNTE3Z
IC508	6-713-192-11	s	IC GS2978-CNTE3Z
IC601	6-715-350-01	s	IC GS2965-INTE3
IC602	6-715-350-01	s	IC GS2965-INTE3
IC603	6-713-192-11	s	IC GS2978-CNTE3Z
IC604	6-713-192-11	s	IC GS2978-CNTE3Z
IC605	6-715-350-01	s	IC GS2965-INTE3
IC606	6-715-350-01	s	IC GS2965-INTE3
IC607	6-713-192-11	s	IC GS2978-CNTE3Z
IC608	6-713-192-11	s	IC GS2978-CNTE3Z
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-419-491-21	s	COIL, CHOKE 10UH
L3	1-400-175-21	s	COIL, CHOKE 47UH
L4	1-419-823-21	s	COIL, CHOKE 33UH
L5	1-419-491-21	s	COIL, CHOKE 10UH
L6	1-419-491-21	s	COIL, CHOKE 10UH

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L81	1-419-630-21	s	COIL, CHOKE 4.7UH
L82	1-400-175-21	s	COIL, CHOKE 47UH
L201	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L202	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L206	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L207	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L208	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L209	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L210	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L211	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L212	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L213	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L214	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L215	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L216	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L301	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L302	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L306	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L307	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L308	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L309	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L310	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L311	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L312	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L313	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L314	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L315	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L316	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L401	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L402	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L406	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L407	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L408	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L409	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L410	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L411	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L412	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L413	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L414	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L415	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L416	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L501	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L502	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L505	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L506	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L507	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L508	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L509	1-414-396-41	s	INDUCTOR (SMD) 4.7UH

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L510	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L511	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L512	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L513	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L514	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L515	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L516	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L601	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L602	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L603	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L604	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L605	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L606	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L607	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L608	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L609	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L610	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L611	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L612	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L613	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L614	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L615	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L616	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS2	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q7	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q8	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q9	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q10	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q81	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q602	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q603	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q604	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-863-81	s	RES, CHIP 100 (1005)
R4	1-208-871-81	s	RES, CHIP 220 (1005)
R5	1-208-863-81	s	RES, CHIP 100 (1005)
R6	1-208-871-81	s	RES, CHIP 220 (1005)
R7	1-208-919-81	s	RES, CHIP 22K (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-919-81	s	RES, CHIP 22K (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-871-81	s	RES, CHIP 220 (1005)
R15	1-208-927-81	s	RES, CHIP 47K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-911-81	s	RES, CHIP 10K (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)
R22	1-208-863-81	s	RES, CHIP 100 (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-911-81	s	RES, CHIP 10K (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-903-81	s	RES, CHIP 4.7K (1005)
R33	1-208-943-81	s	RES, CHIP 220K (1005)
R34	1-208-927-81	s	RES, CHIP 47K (1005)
R35	1-208-903-81	s	RES, CHIP 4.7K (1005)
R36	1-208-943-81	s	RES, CHIP 220K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-943-81	s	RES, CHIP 220K (1005)
R39	1-208-943-81	s	RES, CHIP 220K (1005)
R40	1-208-927-81	s	RES, CHIP 47K (1005)
R41	1-208-903-81	s	RES, CHIP 4.7K (1005)
R42	1-208-943-81	s	RES, CHIP 220K (1005)
R43	1-208-927-81	s	RES, CHIP 47K (1005)
R44	1-208-943-81	s	RES, CHIP 220K (1005)
R45	1-208-935-81	s	RES, CHIP 100K (1005)
R46	1-208-927-81	s	RES, CHIP 47K (1005)
R47	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-927-81	s	RES, CHIP 47K (1005)
R49	1-208-919-81	s	RES, CHIP 22K (1005)
R50	1-208-871-81	s	RES, CHIP 220 (1005)
R51	1-208-871-81	s	RES, CHIP 220 (1005)
R52	1-208-943-81	s	RES, CHIP 220K (1005)
R53	1-208-927-81	s	RES, CHIP 47K (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-927-81	s	RES, CHIP 47K (1005)
R81	1-208-927-81	s	RES, CHIP 47K (1005)
R82	1-208-911-81	s	RES, CHIP 10K (1005)
R84	1-208-911-81	s	RES, CHIP 10K (1005)
R85	1-208-919-81	s	RES, CHIP 22K (1005)
R86	1-208-911-81	s	RES, CHIP 10K (1005)
R87	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R88	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R89	1-208-903-81	s	RES, CHIP 4.7K (1005)
R90	1-208-903-81	s	RES, CHIP 4.7K (1005)
R91	1-208-927-81	s	RES, CHIP 47K (1005)
R92	1-208-887-81	s	RES, CHIP 1.0K (1005)
R93	1-208-887-81	s	RES, CHIP 1.0K (1005)
R94	1-208-887-81	s	RES, CHIP 1.0K (1005)
R95	1-208-903-81	s	RES, CHIP 4.7K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R108	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)
R119	1-208-927-81	s	RES, CHIP 47K (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R147	1-220-878-81	s	RES, CHIP 22 (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-220-878-81	s	RES, CHIP 22 (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-220-878-81	s	RES, CHIP 22 (1005)
R162	1-220-878-81	s	RES, CHIP 22 (1005)
R163	1-220-878-81	s	RES, CHIP 22 (1005)
R164	1-220-878-81	s	RES, CHIP 22 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-878-81	s	RES, CHIP 22 (1005)
R167	1-220-878-81	s	RES, CHIP 22 (1005)
R168	1-208-927-81	s	RES, CHIP 47K (1005)
R169	1-208-927-81	s	RES, CHIP 47K (1005)
R170	1-208-927-81	s	RES, CHIP 47K (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R171	1-208-927-81	s	RES, CHIP 47K (1005)
R172	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R211	1-208-863-81	s	RES, CHIP 100 (1005)
R212	1-208-863-81	s	RES, CHIP 100 (1005)
R215	1-208-855-81	s	RES, CHIP 47 (1005)
R216	1-208-871-81	s	RES, CHIP 220 (1005)
R217	1-208-855-81	s	RES, CHIP 47 (1005)
R218	1-208-871-81	s	RES, CHIP 220 (1005)
R219	1-208-959-81	s	RES, CHIP 1M (1005)
R220	1-208-959-81	s	RES, CHIP 1M (1005)
R221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R224	1-208-887-81	s	RES, CHIP 1.0K (1005)
R225	1-208-863-81	s	RES, CHIP 100 (1005)
R226	1-208-863-81	s	RES, CHIP 100 (1005)
R227	1-208-855-81	s	RES, CHIP 47 (1005)
R228	1-208-855-81	s	RES, CHIP 47 (1005)
R229	1-208-855-81	s	RES, CHIP 47 (1005)
R230	1-208-855-81	s	RES, CHIP 47 (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R234	1-208-884-81	s	RES, CHIP 750 (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-208-884-81	s	RES, CHIP 750 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-865-81	s	RES, CHIP 120 (1005)
R244	1-208-865-81	s	RES, CHIP 120 (1005)
R245	1-208-865-81	s	RES, CHIP 120 (1005)
R246	1-208-865-81	s	RES, CHIP 120 (1005)
R247	1-208-860-81	s	RES, CHIP 75 (1005)
R248	1-208-860-81	s	RES, CHIP 75 (1005)
R249	1-208-911-81	s	RES, CHIP 10K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R255	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R256	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R257	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R259	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R261	1-208-863-81	s	RES, CHIP 100 (1005)
R262	1-208-863-81	s	RES, CHIP 100 (1005)
R265	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R266	1-208-871-81	s	RES, CHIP 220 (1005)
R267	1-208-855-81	s	RES, CHIP 47 (1005)
R268	1-208-871-81	s	RES, CHIP 220 (1005)
R269	1-208-959-81	s	RES, CHIP 1M (1005)
R270	1-208-959-81	s	RES, CHIP 1M (1005)
R271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R274	1-208-887-81	s	RES, CHIP 1.0K (1005)
R275	1-208-863-81	s	RES, CHIP 100 (1005)
R276	1-208-863-81	s	RES, CHIP 100 (1005)
R277	1-208-855-81	s	RES, CHIP 47 (1005)
R278	1-208-855-81	s	RES, CHIP 47 (1005)
R279	1-208-855-81	s	RES, CHIP 47 (1005)
R280	1-208-855-81	s	RES, CHIP 47 (1005)
R283	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R284	1-208-884-81	s	RES, CHIP 750 (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-208-884-81	s	RES, CHIP 750 (1005)
R287	1-208-860-81	s	RES, CHIP 75 (1005)
R288	1-208-860-81	s	RES, CHIP 75 (1005)
R291	1-208-860-81	s	RES, CHIP 75 (1005)
R292	1-208-860-81	s	RES, CHIP 75 (1005)
R293	1-208-865-81	s	RES, CHIP 120 (1005)
R294	1-208-865-81	s	RES, CHIP 120 (1005)
R295	1-208-865-81	s	RES, CHIP 120 (1005)
R296	1-208-865-81	s	RES, CHIP 120 (1005)
R297	1-208-860-81	s	RES, CHIP 75 (1005)
R298	1-208-860-81	s	RES, CHIP 75 (1005)
R299	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-208-863-81	s	RES, CHIP 100 (1005)
R312	1-208-863-81	s	RES, CHIP 100 (1005)
R315	1-208-855-81	s	RES, CHIP 47 (1005)
R316	1-208-871-81	s	RES, CHIP 220 (1005)
R317	1-208-855-81	s	RES, CHIP 47 (1005)
R318	1-208-871-81	s	RES, CHIP 220 (1005)
R319	1-208-959-81	s	RES, CHIP 1M (1005)
R320	1-208-959-81	s	RES, CHIP 1M (1005)
R321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R323	1-208-887-81	s	RES, CHIP 1.0K (1005)
R324	1-208-887-81	s	RES, CHIP 1.0K (1005)
R325	1-208-863-81	s	RES, CHIP 100 (1005)
R326	1-208-863-81	s	RES, CHIP 100 (1005)
R327	1-208-855-81	s	RES, CHIP 47 (1005)
R328	1-208-855-81	s	RES, CHIP 47 (1005)
R329	1-208-855-81	s	RES, CHIP 47 (1005)
R330	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R334	1-208-884-81	s	RES, CHIP 750 (1005)
R335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R336	1-208-884-81	s	RES, CHIP 750 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-860-81	s	RES, CHIP 75 (1005)
R342	1-208-860-81	s	RES, CHIP 75 (1005)
R343	1-208-865-81	s	RES, CHIP 120 (1005)
R344	1-208-865-81	s	RES, CHIP 120 (1005)
R345	1-208-865-81	s	RES, CHIP 120 (1005)
R346	1-208-865-81	s	RES, CHIP 120 (1005)
R347	1-208-860-81	s	RES, CHIP 75 (1005)
R348	1-208-860-81	s	RES, CHIP 75 (1005)
R349	1-208-911-81	s	RES, CHIP 10K (1005)
R350	1-208-911-81	s	RES, CHIP 10K (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R361	1-208-863-81	s	RES, CHIP 100 (1005)
R362	1-208-863-81	s	RES, CHIP 100 (1005)
R365	1-208-855-81	s	RES, CHIP 47 (1005)
R366	1-208-871-81	s	RES, CHIP 220 (1005)
R367	1-208-855-81	s	RES, CHIP 47 (1005)
R368	1-208-871-81	s	RES, CHIP 220 (1005)
R369	1-208-959-81	s	RES, CHIP 1M (1005)
R370	1-208-959-81	s	RES, CHIP 1M (1005)
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-208-887-81	s	RES, CHIP 1.0K (1005)
R374	1-208-887-81	s	RES, CHIP 1.0K (1005)
R375	1-208-863-81	s	RES, CHIP 100 (1005)
R376	1-208-863-81	s	RES, CHIP 100 (1005)
R377	1-208-855-81	s	RES, CHIP 47 (1005)
R378	1-208-855-81	s	RES, CHIP 47 (1005)
R379	1-208-855-81	s	RES, CHIP 47 (1005)
R380	1-208-855-81	s	RES, CHIP 47 (1005)
R383	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R384	1-208-884-81	s	RES, CHIP 750 (1005)
R385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R386	1-208-884-81	s	RES, CHIP 750 (1005)
R387	1-208-860-81	s	RES, CHIP 75 (1005)
R388	1-208-860-81	s	RES, CHIP 75 (1005)
R391	1-208-860-81	s	RES, CHIP 75 (1005)
R392	1-208-860-81	s	RES, CHIP 75 (1005)
R393	1-208-865-81	s	RES, CHIP 120 (1005)
R394	1-208-865-81	s	RES, CHIP 120 (1005)
R395	1-208-865-81	s	RES, CHIP 120 (1005)
R396	1-208-865-81	s	RES, CHIP 120 (1005)
R397	1-208-860-81	s	RES, CHIP 75 (1005)
R398	1-208-860-81	s	RES, CHIP 75 (1005)
R399	1-208-911-81	s	RES, CHIP 10K (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R400	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-208-863-81	s	RES, CHIP 100 (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-855-81	s	RES, CHIP 47 (1005)
R416	1-208-871-81	s	RES, CHIP 220 (1005)
R417	1-208-855-81	s	RES, CHIP 47 (1005)
R418	1-208-871-81	s	RES, CHIP 220 (1005)
R419	1-208-959-81	s	RES, CHIP 1M (1005)
R420	1-208-959-81	s	RES, CHIP 1M (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-208-887-81	s	RES, CHIP 1.0K (1005)
R424	1-208-887-81	s	RES, CHIP 1.0K (1005)
R425	1-208-863-81	s	RES, CHIP 100 (1005)
R426	1-208-863-81	s	RES, CHIP 100 (1005)
R427	1-208-855-81	s	RES, CHIP 47 (1005)
R428	1-208-855-81	s	RES, CHIP 47 (1005)
R429	1-208-855-81	s	RES, CHIP 47 (1005)
R430	1-208-855-81	s	RES, CHIP 47 (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-208-884-81	s	RES, CHIP 750 (1005)
R435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R436	1-208-884-81	s	RES, CHIP 750 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-860-81	s	RES, CHIP 75 (1005)
R442	1-208-860-81	s	RES, CHIP 75 (1005)
R443	1-208-865-81	s	RES, CHIP 120 (1005)
R444	1-208-865-81	s	RES, CHIP 120 (1005)
R445	1-208-865-81	s	RES, CHIP 120 (1005)
R446	1-208-865-81	s	RES, CHIP 120 (1005)
R447	1-208-860-81	s	RES, CHIP 75 (1005)
R448	1-208-860-81	s	RES, CHIP 75 (1005)
R449	1-208-911-81	s	RES, CHIP 10K (1005)
R450	1-208-911-81	s	RES, CHIP 10K (1005)
R451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R457	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R461	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-863-81	s	RES, CHIP 100 (1005)
R465	1-208-855-81	s	RES, CHIP 47 (1005)
R466	1-208-871-81	s	RES, CHIP 220 (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R467	1-208-855-81	s	RES, CHIP 47 (1005)
R468	1-208-871-81	s	RES, CHIP 220 (1005)
R469	1-208-959-81	s	RES, CHIP 1M (1005)
R470	1-208-959-81	s	RES, CHIP 1M (1005)
R471	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R473	1-208-887-81	s	RES, CHIP 1.0K (1005)
R474	1-208-887-81	s	RES, CHIP 1.0K (1005)
R475	1-208-863-81	s	RES, CHIP 100 (1005)
R476	1-208-863-81	s	RES, CHIP 100 (1005)
R477	1-208-855-81	s	RES, CHIP 47 (1005)
R478	1-208-855-81	s	RES, CHIP 47 (1005)
R479	1-208-855-81	s	RES, CHIP 47 (1005)
R480	1-208-855-81	s	RES, CHIP 47 (1005)
R483	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R484	1-208-884-81	s	RES, CHIP 750 (1005)
R485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R486	1-208-884-81	s	RES, CHIP 750 (1005)
R487	1-208-860-81	s	RES, CHIP 75 (1005)
R488	1-208-860-81	s	RES, CHIP 75 (1005)
R491	1-208-860-81	s	RES, CHIP 75 (1005)
R492	1-208-860-81	s	RES, CHIP 75 (1005)
R493	1-208-865-81	s	RES, CHIP 120 (1005)
R494	1-208-865-81	s	RES, CHIP 120 (1005)
R495	1-208-865-81	s	RES, CHIP 120 (1005)
R496	1-208-865-81	s	RES, CHIP 120 (1005)
R497	1-208-860-81	s	RES, CHIP 75 (1005)
R498	1-208-860-81	s	RES, CHIP 75 (1005)
R499	1-208-911-81	s	RES, CHIP 10K (1005)
R500	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-208-863-81	s	RES, CHIP 100 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-871-81	s	RES, CHIP 220 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-871-81	s	RES, CHIP 220 (1005)
R519	1-208-959-81	s	RES, CHIP 1M (1005)
R520	1-208-959-81	s	RES, CHIP 1M (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-887-81	s	RES, CHIP 1.0K (1005)
R524	1-208-887-81	s	RES, CHIP 1.0K (1005)
R525	1-208-863-81	s	RES, CHIP 100 (1005)
R526	1-208-863-81	s	RES, CHIP 100 (1005)
R527	1-208-855-81	s	RES, CHIP 47 (1005)
R528	1-208-855-81	s	RES, CHIP 47 (1005)
R529	1-208-855-81	s	RES, CHIP 47 (1005)
R530	1-208-855-81	s	RES, CHIP 47 (1005)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R534	1-208-884-81	s	RES, CHIP 750 (1005)
R535	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R536	1-208-884-81	s	RES, CHIP 750 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-860-81	s	RES, CHIP 75 (1005)
R542	1-208-860-81	s	RES, CHIP 75 (1005)
R543	1-208-865-81	s	RES, CHIP 120 (1005)
R544	1-208-865-81	s	RES, CHIP 120 (1005)
R545	1-208-865-81	s	RES, CHIP 120 (1005)
R546	1-208-865-81	s	RES, CHIP 120 (1005)
R547	1-208-860-81	s	RES, CHIP 75 (1005)
R548	1-208-860-81	s	RES, CHIP 75 (1005)
R549	1-208-911-81	s	RES, CHIP 10K (1005)
R550	1-208-911-81	s	RES, CHIP 10K (1005)
R551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R561	1-208-863-81	s	RES, CHIP 100 (1005)
R562	1-208-863-81	s	RES, CHIP 100 (1005)
R565	1-208-855-81	s	RES, CHIP 47 (1005)
R566	1-208-871-81	s	RES, CHIP 220 (1005)
R567	1-208-855-81	s	RES, CHIP 47 (1005)
R568	1-208-871-81	s	RES, CHIP 220 (1005)
R569	1-208-959-81	s	RES, CHIP 1M (1005)
R570	1-208-959-81	s	RES, CHIP 1M (1005)
R571	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R572	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R573	1-208-887-81	s	RES, CHIP 1.0K (1005)
R574	1-208-887-81	s	RES, CHIP 1.0K (1005)
R575	1-208-863-81	s	RES, CHIP 100 (1005)
R576	1-208-863-81	s	RES, CHIP 100 (1005)
R577	1-208-855-81	s	RES, CHIP 47 (1005)
R578	1-208-855-81	s	RES, CHIP 47 (1005)
R579	1-208-855-81	s	RES, CHIP 47 (1005)
R580	1-208-855-81	s	RES, CHIP 47 (1005)
R583	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R584	1-208-884-81	s	RES, CHIP 750 (1005)
R585	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R586	1-208-884-81	s	RES, CHIP 750 (1005)
R587	1-208-860-81	s	RES, CHIP 75 (1005)
R588	1-208-860-81	s	RES, CHIP 75 (1005)
R591	1-208-860-81	s	RES, CHIP 75 (1005)
R592	1-208-860-81	s	RES, CHIP 75 (1005)
R593	1-208-865-81	s	RES, CHIP 120 (1005)
R594	1-208-865-81	s	RES, CHIP 120 (1005)
R595	1-208-865-81	s	RES, CHIP 120 (1005)
R596	1-208-865-81	s	RES, CHIP 120 (1005)
R597	1-208-860-81	s	RES, CHIP 75 (1005)
R598	1-208-860-81	s	RES, CHIP 75 (1005)
R599	1-208-911-81	s	RES, CHIP 10K (1005)
R600	1-208-911-81	s	RES, CHIP 10K (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-208-863-81	s	RES, CHIP 100 (1005)
R612	1-208-863-81	s	RES, CHIP 100 (1005)
R615	1-208-855-81	s	RES, CHIP 47 (1005)
R616	1-208-871-81	s	RES, CHIP 220 (1005)
R617	1-208-855-81	s	RES, CHIP 47 (1005)
R618	1-208-871-81	s	RES, CHIP 220 (1005)
R619	1-208-959-81	s	RES, CHIP 1M (1005)
R620	1-208-959-81	s	RES, CHIP 1M (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R624	1-208-887-81	s	RES, CHIP 1.0K (1005)
R625	1-208-863-81	s	RES, CHIP 100 (1005)
R626	1-208-863-81	s	RES, CHIP 100 (1005)
R627	1-208-855-81	s	RES, CHIP 47 (1005)
R628	1-208-855-81	s	RES, CHIP 47 (1005)
R629	1-208-855-81	s	RES, CHIP 47 (1005)
R630	1-208-855-81	s	RES, CHIP 47 (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-208-884-81	s	RES, CHIP 750 (1005)
R635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R636	1-208-884-81	s	RES, CHIP 750 (1005)
R637	1-208-860-81	s	RES, CHIP 75 (1005)
R638	1-208-860-81	s	RES, CHIP 75 (1005)
R641	1-208-860-81	s	RES, CHIP 75 (1005)
R642	1-208-860-81	s	RES, CHIP 75 (1005)
R643	1-208-865-81	s	RES, CHIP 120 (1005)
R644	1-208-865-81	s	RES, CHIP 120 (1005)
R645	1-208-865-81	s	RES, CHIP 120 (1005)
R646	1-208-865-81	s	RES, CHIP 120 (1005)
R647	1-208-860-81	s	RES, CHIP 75 (1005)
R648	1-208-860-81	s	RES, CHIP 75 (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R652	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R653	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R655	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R656	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R659	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R660	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R661	1-208-863-81	s	RES, CHIP 100 (1005)
R662	1-208-863-81	s	RES, CHIP 100 (1005)
R665	1-208-855-81	s	RES, CHIP 47 (1005)
R666	1-208-871-81	s	RES, CHIP 220 (1005)
R667	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R668	1-208-871-81	s	RES, CHIP 220 (1005)
R669	1-208-959-81	s	RES, CHIP 1M (1005)
R670	1-208-959-81	s	RES, CHIP 1M (1005)
R671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R672	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R673	1-208-887-81	s	RES, CHIP 1.0K (1005)
R674	1-208-887-81	s	RES, CHIP 1.0K (1005)
R675	1-208-863-81	s	RES, CHIP 100 (1005)
R676	1-208-863-81	s	RES, CHIP 100 (1005)
R677	1-208-855-81	s	RES, CHIP 47 (1005)
R678	1-208-855-81	s	RES, CHIP 47 (1005)
R679	1-208-855-81	s	RES, CHIP 47 (1005)
R680	1-208-855-81	s	RES, CHIP 47 (1005)
R683	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R684	1-208-884-81	s	RES, CHIP 750 (1005)
R685	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R686	1-208-884-81	s	RES, CHIP 750 (1005)
R687	1-208-860-81	s	RES, CHIP 75 (1005)
R688	1-208-860-81	s	RES, CHIP 75 (1005)
R691	1-208-860-81	s	RES, CHIP 75 (1005)
R692	1-208-860-81	s	RES, CHIP 75 (1005)
R693	1-208-865-81	s	RES, CHIP 120 (1005)
R694	1-208-865-81	s	RES, CHIP 120 (1005)
R695	1-208-865-81	s	RES, CHIP 120 (1005)
R696	1-208-865-81	s	RES, CHIP 120 (1005)
R697	1-208-860-81	s	RES, CHIP 75 (1005)
R698	1-208-860-81	s	RES, CHIP 75 (1005)
R699	1-208-911-81	s	RES, CHIP 10K (1005)
R700	1-208-911-81	s	RES, CHIP 10K (1005)
R703	1-208-911-81	s	RES, CHIP 10K (1005)
R705	1-208-911-81	s	RES, CHIP 10K (1005)
R711	1-208-911-81	s	RES, CHIP 10K (1005)
R713	1-208-911-81	s	RES, CHIP 10K (1005)
R723	1-208-911-81	s	RES, CHIP 10K (1005)
R725	1-208-911-81	s	RES, CHIP 10K (1005)
R731	1-208-911-81	s	RES, CHIP 10K (1005)
R733	1-208-911-81	s	RES, CHIP 10K (1005)
R743	1-208-911-81	s	RES, CHIP 10K (1005)
R745	1-208-911-81	s	RES, CHIP 10K (1005)
R751	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-911-81	s	RES, CHIP 10K (1005)
R763	1-208-911-81	s	RES, CHIP 10K (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R771	1-208-911-81	s	RES, CHIP 10K (1005)
R773	1-208-911-81	s	RES, CHIP 10K (1005)
R783	1-208-911-81	s	RES, CHIP 10K (1005)
R785	1-208-911-81	s	RES, CHIP 10K (1005)
R791	1-208-911-81	s	RES, CHIP 10K (1005)
R793	1-208-911-81	s	RES, CHIP 10K (1005)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP81	1-535-877-22	s	CHIP, CHECKER
TP82	1-535-877-22	s	CHIP, CHECKER
X101	1-813-649-11	s	OSCILLATOR, CRYSTAL (20MHZ)

(CNO-37 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
X201	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X202	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X203	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X204	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X301	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X302	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X303	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X304	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X401	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X402	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X403	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X404	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X501	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X502	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X503	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X504	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X601	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X602	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X603	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)
X604	1-813-267-11	s	VIBRATOR, CRYSTAL (27 MHz)

CNO-38 BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-308-A	s	MOUNTED CIRCUIT BOARD, CNO-38
20pcs	2-655-586-01	s	SCREW +B M2.6 EG
20pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C5	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C6	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C7	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C8	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C14	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C15	1-100-986-21	s	CAP, ELECT 330MF
C16	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C17	1-100-986-21	s	CAP, ELECT 330MF
C18	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C120	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C206	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C227	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C230	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C231	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C327	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C328	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C329	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C330	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C406	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C526	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN7	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN8	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN9	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN10	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN11	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN12	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN13	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN14	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN15	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN16	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN17	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN18	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC51	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC101	6-713-192-01	s	IC GS2978-CNE3
IC102	6-713-192-01	s	IC GS2978-CNE3
IC103	6-713-192-01	s	IC GS2978-CNE3
IC104	6-713-192-01	s	IC GS2978-CNE3
IC201	6-713-192-01	s	IC GS2978-CNE3
IC202	6-713-192-01	s	IC GS2978-CNE3
IC203	6-713-192-01	s	IC GS2978-CNE3
IC204	6-713-192-01	s	IC GS2978-CNE3
IC301	6-713-192-01	s	IC GS2978-CNE3
IC302	6-713-192-01	s	IC GS2978-CNE3
IC303	6-713-192-01	s	IC GS2978-CNE3
IC304	6-713-192-01	s	IC GS2978-CNE3
IC401	6-713-192-01	s	IC GS2978-CNE3
IC402	6-713-192-01	s	IC GS2978-CNE3
IC403	6-713-192-01	s	IC GS2978-CNE3
IC404	6-713-192-01	s	IC GS2978-CNE3

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC501	6-713-192-01	s	IC GS2978-CNE3
IC502	6-713-192-01	s	IC GS2978-CNE3
IC503	6-713-192-01	s	IC GS2978-CNE3
IC504	6-713-192-01	s	IC GS2978-CNE3
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-400-175-21	s	COIL, CHOKE 47UH
L3	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L105	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L106	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L107	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L108	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L109	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L110	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L111	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L112	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L206	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L207	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L208	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L209	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L210	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L211	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L212	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L306	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L307	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L308	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L309	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L310	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L311	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L312	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L406	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L407	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L408	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L409	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L410	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L411	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L412	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L505	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L506	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L507	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L508	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L509	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L510	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L511	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L512	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
PS1	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q4	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q5	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-943-81	s	RES, CHIP 220K (1005)
R4	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-943-81	s	RES, CHIP 220K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-715-11	s	RES, CHIP 22K (1005)
R14	1-208-715-11	s	RES, CHIP 22K (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-943-81	s	RES, CHIP 220K (1005)
R18	1-208-927-81	s	RES, CHIP 47K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R22	1-208-871-81	s	RES, CHIP 220 (1005)
R23	1-208-715-11	s	RES, CHIP 22K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-911-81	s	RES, CHIP 10K (1005)
R26	1-208-855-81	s	RES, CHIP 47 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-863-81	s	RES, CHIP 100 (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-855-81	s	RES, CHIP 47 (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-855-81	s	RES, CHIP 47 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-208-884-81	s	RES, CHIP 750 (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-884-81	s	RES, CHIP 750 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-208-884-81	s	RES, CHIP 750 (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-208-884-81	s	RES, CHIP 750 (1005)
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-860-81	s	RES, CHIP 75 (1005)
R126	1-208-860-81	s	RES, CHIP 75 (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-860-81	s	RES, CHIP 75 (1005)
R129	1-208-860-81	s	RES, CHIP 75 (1005)
R130	1-208-860-81	s	RES, CHIP 75 (1005)
R131	1-208-860-81	s	RES, CHIP 75 (1005)
R132	1-208-860-81	s	RES, CHIP 75 (1005)
R133	1-208-860-81	s	RES, CHIP 75 (1005)
R134	1-208-860-81	s	RES, CHIP 75 (1005)
R135	1-208-860-81	s	RES, CHIP 75 (1005)
R136	1-208-860-81	s	RES, CHIP 75 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-911-81	s	RES, CHIP 10K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-208-855-81	s	RES, CHIP 47 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-208-884-81	s	RES, CHIP 750 (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-208-884-81	s	RES, CHIP 750 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-884-81	s	RES, CHIP 750 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-884-81	s	RES, CHIP 750 (1005)
R221	1-208-860-81	s	RES, CHIP 75 (1005)
R222	1-208-860-81	s	RES, CHIP 75 (1005)
R223	1-208-860-81	s	RES, CHIP 75 (1005)
R224	1-208-860-81	s	RES, CHIP 75 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-860-81	s	RES, CHIP 75 (1005)
R228	1-208-860-81	s	RES, CHIP 75 (1005)
R229	1-208-860-81	s	RES, CHIP 75 (1005)
R230	1-208-860-81	s	RES, CHIP 75 (1005)
R231	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R232	1-208-860-81	s	RES, CHIP 75 (1005)
R233	1-208-860-81	s	RES, CHIP 75 (1005)
R234	1-208-860-81	s	RES, CHIP 75 (1005)
R235	1-208-860-81	s	RES, CHIP 75 (1005)
R236	1-208-860-81	s	RES, CHIP 75 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-855-81	s	RES, CHIP 47 (1005)
R307	1-208-855-81	s	RES, CHIP 47 (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-884-81	s	RES, CHIP 750 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-884-81	s	RES, CHIP 750 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-884-81	s	RES, CHIP 750 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-884-81	s	RES, CHIP 750 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-860-81	s	RES, CHIP 75 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-860-81	s	RES, CHIP 75 (1005)
R329	1-208-860-81	s	RES, CHIP 75 (1005)
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-208-860-81	s	RES, CHIP 75 (1005)
R335	1-208-860-81	s	RES, CHIP 75 (1005)
R336	1-208-860-81	s	RES, CHIP 75 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-855-81	s	RES, CHIP 47 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-208-884-81	s	RES, CHIP 750 (1005)
R421	1-208-860-81	s	RES, CHIP 75 (1005)
R422	1-208-860-81	s	RES, CHIP 75 (1005)
R423	1-208-860-81	s	RES, CHIP 75 (1005)
R424	1-208-860-81	s	RES, CHIP 75 (1005)
R425	1-208-860-81	s	RES, CHIP 75 (1005)
R426	1-208-860-81	s	RES, CHIP 75 (1005)
R427	1-208-860-81	s	RES, CHIP 75 (1005)
R428	1-208-860-81	s	RES, CHIP 75 (1005)
R429	1-208-860-81	s	RES, CHIP 75 (1005)
R430	1-208-860-81	s	RES, CHIP 75 (1005)
R431	1-208-860-81	s	RES, CHIP 75 (1005)
R432	1-208-860-81	s	RES, CHIP 75 (1005)
R433	1-208-860-81	s	RES, CHIP 75 (1005)
R434	1-208-860-81	s	RES, CHIP 75 (1005)
R435	1-208-860-81	s	RES, CHIP 75 (1005)
R436	1-208-860-81	s	RES, CHIP 75 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-208-884-81	s	RES, CHIP 750 (1005)
R521	1-208-860-81	s	RES, CHIP 75 (1005)
R522	1-208-860-81	s	RES, CHIP 75 (1005)
R523	1-208-860-81	s	RES, CHIP 75 (1005)
R524	1-208-860-81	s	RES, CHIP 75 (1005)
R525	1-208-860-81	s	RES, CHIP 75 (1005)
R526	1-208-860-81	s	RES, CHIP 75 (1005)
R527	1-208-860-81	s	RES, CHIP 75 (1005)
R528	1-208-860-81	s	RES, CHIP 75 (1005)
R529	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-38 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R530	1-208-860-81	s	RES, CHIP 75 (1005)
R531	1-208-860-81	s	RES, CHIP 75 (1005)
R532	1-208-860-81	s	RES, CHIP 75 (1005)
R533	1-208-860-81	s	RES, CHIP 75 (1005)
R534	1-208-860-81	s	RES, CHIP 75 (1005)
R535	1-208-860-81	s	RES, CHIP 75 (1005)
R536	1-208-860-81	s	RES, CHIP 75 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
RB51	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB52	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER

CNO-38 BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-308-B	s	MOUNTED CIRCUIT BOARD, CNO-38
10pcs	2-655-586-01	s	SCREW +B M2.6 EG
10pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C5	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C7	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C8	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C9	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C10	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C14	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C15	1-114-533-21	s	CAP, ELECT 330MF
C16	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C17	1-114-533-21	s	CAP, ELECT 330MF
C18	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C120	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C206	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C227	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C230	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C231	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C327	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C328	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C329	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C330	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C406	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C526	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN17	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN19	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC51	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC101	6-713-192-11	s	IC GS2978-CNTE3Z
IC102	6-713-192-11	s	IC GS2978-CNTE3Z
IC103	6-713-192-11	s	IC GS2978-CNTE3Z
IC104	6-713-192-11	s	IC GS2978-CNTE3Z
IC201	6-713-192-11	s	IC GS2978-CNTE3Z
IC202	6-713-192-11	s	IC GS2978-CNTE3Z
IC203	6-713-192-11	s	IC GS2978-CNTE3Z
IC204	6-713-192-11	s	IC GS2978-CNTE3Z
IC301	6-713-192-11	s	IC GS2978-CNTE3Z
IC302	6-713-192-11	s	IC GS2978-CNTE3Z
IC303	6-713-192-11	s	IC GS2978-CNTE3Z
IC304	6-713-192-11	s	IC GS2978-CNTE3Z
IC401	6-713-192-11	s	IC GS2978-CNTE3Z
IC402	6-713-192-11	s	IC GS2978-CNTE3Z
IC403	6-713-192-11	s	IC GS2978-CNTE3Z
IC404	6-713-192-11	s	IC GS2978-CNTE3Z
IC501	6-713-192-11	s	IC GS2978-CNTE3Z
IC502	6-713-192-11	s	IC GS2978-CNTE3Z
IC503	6-713-192-11	s	IC GS2978-CNTE3Z
IC504	6-713-192-11	s	IC GS2978-CNTE3Z
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-400-175-21	s	COIL, CHOKE 47UH
L3	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L105	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L106	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L107	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L108	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L109	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L110	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L111	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L112	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L206	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L207	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L208	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L306	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L307	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L308	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L309	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L310	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L311	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L312	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L406	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L407	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L408	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L409	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L410	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L411	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L412	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L505	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L506	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L507	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L508	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L509	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L510	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L511	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L512	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q4	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q5	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-943-81	s	RES, CHIP 220K (1005)
R4	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-943-81	s	RES, CHIP 220K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-919-81	s	RES, CHIP 22K (1005)
R14	1-208-919-81	s	RES, CHIP 22K (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-943-81	s	RES, CHIP 220K (1005)
R18	1-208-927-81	s	RES, CHIP 47K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R22	1-208-871-81	s	RES, CHIP 220 (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-911-81	s	RES, CHIP 10K (1005)
R26	1-208-855-81	s	RES, CHIP 47 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-863-81	s	RES, CHIP 100 (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-855-81	s	RES, CHIP 47 (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-855-81	s	RES, CHIP 47 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-208-884-81	s	RES, CHIP 750 (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-884-81	s	RES, CHIP 750 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-208-884-81	s	RES, CHIP 750 (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-208-884-81	s	RES, CHIP 750 (1005)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-860-81	s	RES, CHIP 75 (1005)
R126	1-208-860-81	s	RES, CHIP 75 (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-860-81	s	RES, CHIP 75 (1005)
R129	1-208-865-81	s	RES, CHIP 120 (1005)
R130	1-208-865-81	s	RES, CHIP 120 (1005)
R131	1-208-865-81	s	RES, CHIP 120 (1005)
R132	1-208-865-81	s	RES, CHIP 120 (1005)
R133	1-208-865-81	s	RES, CHIP 120 (1005)
R134	1-208-865-81	s	RES, CHIP 120 (1005)
R135	1-208-865-81	s	RES, CHIP 120 (1005)
R136	1-208-865-81	s	RES, CHIP 120 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-911-81	s	RES, CHIP 10K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-863-81	s	RES, CHIP 100 (1005)
R146	1-208-863-81	s	RES, CHIP 100 (1005)
R147	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-863-81	s	RES, CHIP 100 (1005)
R155	1-208-911-81	s	RES, CHIP 10K (1005)
R156	1-208-911-81	s	RES, CHIP 10K (1005)
R163	1-208-911-81	s	RES, CHIP 10K (1005)
R164	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-208-855-81	s	RES, CHIP 47 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-208-884-81	s	RES, CHIP 750 (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-208-884-81	s	RES, CHIP 750 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-884-81	s	RES, CHIP 750 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-884-81	s	RES, CHIP 750 (1005)
R221	1-208-860-81	s	RES, CHIP 75 (1005)
R222	1-208-860-81	s	RES, CHIP 75 (1005)
R223	1-208-860-81	s	RES, CHIP 75 (1005)
R224	1-208-860-81	s	RES, CHIP 75 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-860-81	s	RES, CHIP 75 (1005)
R228	1-208-860-81	s	RES, CHIP 75 (1005)
R229	1-208-865-81	s	RES, CHIP 120 (1005)
R230	1-208-865-81	s	RES, CHIP 120 (1005)
R231	1-208-865-81	s	RES, CHIP 120 (1005)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R232	1-208-865-81	s	RES, CHIP 120 (1005)
R233	1-208-865-81	s	RES, CHIP 120 (1005)
R234	1-208-865-81	s	RES, CHIP 120 (1005)
R235	1-208-865-81	s	RES, CHIP 120 (1005)
R236	1-208-865-81	s	RES, CHIP 120 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-863-81	s	RES, CHIP 100 (1005)
R246	1-208-863-81	s	RES, CHIP 100 (1005)
R247	1-208-863-81	s	RES, CHIP 100 (1005)
R248	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-911-81	s	RES, CHIP 10K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-855-81	s	RES, CHIP 47 (1005)
R307	1-208-855-81	s	RES, CHIP 47 (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-884-81	s	RES, CHIP 750 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-884-81	s	RES, CHIP 750 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-884-81	s	RES, CHIP 750 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-884-81	s	RES, CHIP 750 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-860-81	s	RES, CHIP 75 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-860-81	s	RES, CHIP 75 (1005)
R329	1-208-865-81	s	RES, CHIP 120 (1005)
R330	1-208-865-81	s	RES, CHIP 120 (1005)
R331	1-208-865-81	s	RES, CHIP 120 (1005)
R332	1-208-865-81	s	RES, CHIP 120 (1005)
R333	1-208-865-81	s	RES, CHIP 120 (1005)
R334	1-208-865-81	s	RES, CHIP 120 (1005)
R335	1-208-865-81	s	RES, CHIP 120 (1005)
R336	1-208-865-81	s	RES, CHIP 120 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-863-81	s	RES, CHIP 100 (1005)
R346	1-208-863-81	s	RES, CHIP 100 (1005)
R347	1-208-863-81	s	RES, CHIP 100 (1005)
R348	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R363	1-208-911-81	s	RES, CHIP 10K (1005)
R364	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-855-81	s	RES, CHIP 47 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-208-884-81	s	RES, CHIP 750 (1005)
R421	1-208-860-81	s	RES, CHIP 75 (1005)
R422	1-208-860-81	s	RES, CHIP 75 (1005)
R423	1-208-860-81	s	RES, CHIP 75 (1005)
R424	1-208-860-81	s	RES, CHIP 75 (1005)
R425	1-208-860-81	s	RES, CHIP 75 (1005)
R426	1-208-860-81	s	RES, CHIP 75 (1005)
R427	1-208-860-81	s	RES, CHIP 75 (1005)
R428	1-208-860-81	s	RES, CHIP 75 (1005)
R429	1-208-865-81	s	RES, CHIP 120 (1005)
R430	1-208-865-81	s	RES, CHIP 120 (1005)
R431	1-208-865-81	s	RES, CHIP 120 (1005)
R432	1-208-865-81	s	RES, CHIP 120 (1005)
R433	1-208-865-81	s	RES, CHIP 120 (1005)
R434	1-208-865-81	s	RES, CHIP 120 (1005)
R435	1-208-865-81	s	RES, CHIP 120 (1005)
R436	1-208-865-81	s	RES, CHIP 120 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-208-863-81	s	RES, CHIP 100 (1005)
R455	1-208-911-81	s	RES, CHIP 10K (1005)
R456	1-208-911-81	s	RES, CHIP 10K (1005)
R463	1-208-911-81	s	RES, CHIP 10K (1005)
R464	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-208-884-81	s	RES, CHIP 750 (1005)
R521	1-208-860-81	s	RES, CHIP 75 (1005)
R522	1-208-860-81	s	RES, CHIP 75 (1005)
R523	1-208-860-81	s	RES, CHIP 75 (1005)
R524	1-208-860-81	s	RES, CHIP 75 (1005)
R525	1-208-860-81	s	RES, CHIP 75 (1005)
R526	1-208-860-81	s	RES, CHIP 75 (1005)
R527	1-208-860-81	s	RES, CHIP 75 (1005)
R528	1-208-860-81	s	RES, CHIP 75 (1005)
R529	1-208-865-81	s	RES, CHIP 120 (1005)
R530	1-208-865-81	s	RES, CHIP 120 (1005)
R531	1-208-865-81	s	RES, CHIP 120 (1005)
R532	1-208-865-81	s	RES, CHIP 120 (1005)
R533	1-208-865-81	s	RES, CHIP 120 (1005)
R534	1-208-865-81	s	RES, CHIP 120 (1005)
R535	1-208-865-81	s	RES, CHIP 120 (1005)
R536	1-208-865-81	s	RES, CHIP 120 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R546	1-208-863-81	s	RES, CHIP 100 (1005)
R547	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-208-863-81	s	RES, CHIP 100 (1005)
R555	1-208-911-81	s	RES, CHIP 10K (1005)
R556	1-208-911-81	s	RES, CHIP 10K (1005)
R563	1-208-911-81	s	RES, CHIP 10K (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
RB51	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB52	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER

CNO-38A BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-857-A	s	MOUNTED CIRCUIT BOARD, CNO-38A
20pcs	2-655-586-01	s	SCREW +B M2.6 EG
20pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C5	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C6	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C7	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C8	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C14	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C15	1-100-986-21	s	CAP, ELECT 330MF
C16	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C17	1-100-986-21	s	CAP, ELECT 330MF
C18	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C120	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C206	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C227	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C230	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C231	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C327	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C328	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C329	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C330	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C406	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C526	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN7	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN8	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN9	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN10	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN11	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN12	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN13	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN14	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN15	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN16	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN17	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN18	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC51	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC101	6-713-192-01	s	IC GS2978-CNE3
IC102	6-713-192-01	s	IC GS2978-CNE3
IC103	6-713-192-01	s	IC GS2978-CNE3
IC104	6-713-192-01	s	IC GS2978-CNE3
IC201	6-713-192-01	s	IC GS2978-CNE3
IC202	6-713-192-01	s	IC GS2978-CNE3
IC203	6-713-192-01	s	IC GS2978-CNE3
IC204	6-713-192-01	s	IC GS2978-CNE3
IC301	6-713-192-01	s	IC GS2978-CNE3
IC302	6-713-192-01	s	IC GS2978-CNE3
IC303	6-713-192-01	s	IC GS2978-CNE3
IC304	6-713-192-01	s	IC GS2978-CNE3
IC401	6-713-192-01	s	IC GS2978-CNE3
IC402	6-713-192-01	s	IC GS2978-CNE3
IC403	6-713-192-01	s	IC GS2978-CNE3
IC404	6-713-192-01	s	IC GS2978-CNE3

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC501	6-713-192-01	s	IC GS2978-CNE3
IC502	6-713-192-01	s	IC GS2978-CNE3
IC503	6-713-192-01	s	IC GS2978-CNE3
IC504	6-713-192-01	s	IC GS2978-CNE3
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-400-175-21	s	COIL, CHOKE 47UH
L3	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L105	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L106	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L107	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L108	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L109	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L110	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L111	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L112	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L206	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L207	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L208	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L209	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L210	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L211	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L212	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L306	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L307	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L308	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L309	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L310	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L311	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L312	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L406	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L407	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L408	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L409	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L410	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L411	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L412	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L505	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L506	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L507	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L508	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L509	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L510	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L511	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L512	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
PS1	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q4	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q5	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-943-81	s	RES, CHIP 220K (1005)
R4	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-943-81	s	RES, CHIP 220K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-715-11	s	RES, CHIP 22K (1005)
R14	1-208-715-11	s	RES, CHIP 22K (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-943-81	s	RES, CHIP 220K (1005)
R18	1-208-927-81	s	RES, CHIP 47K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R22	1-208-871-81	s	RES, CHIP 220 (1005)
R23	1-208-715-11	s	RES, CHIP 22K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-911-81	s	RES, CHIP 10K (1005)
R26	1-208-855-81	s	RES, CHIP 47 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-863-81	s	RES, CHIP 100 (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-855-81	s	RES, CHIP 47 (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-855-81	s	RES, CHIP 47 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-208-884-81	s	RES, CHIP 750 (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-884-81	s	RES, CHIP 750 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-208-884-81	s	RES, CHIP 750 (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-208-884-81	s	RES, CHIP 750 (1005)
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-860-81	s	RES, CHIP 75 (1005)
R126	1-208-860-81	s	RES, CHIP 75 (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-860-81	s	RES, CHIP 75 (1005)
R129	1-208-860-81	s	RES, CHIP 75 (1005)
R130	1-208-860-81	s	RES, CHIP 75 (1005)
R131	1-208-860-81	s	RES, CHIP 75 (1005)
R132	1-208-860-81	s	RES, CHIP 75 (1005)
R133	1-208-860-81	s	RES, CHIP 75 (1005)
R134	1-208-860-81	s	RES, CHIP 75 (1005)
R135	1-208-860-81	s	RES, CHIP 75 (1005)
R136	1-208-860-81	s	RES, CHIP 75 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-911-81	s	RES, CHIP 10K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-208-855-81	s	RES, CHIP 47 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-208-884-81	s	RES, CHIP 750 (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-208-884-81	s	RES, CHIP 750 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-884-81	s	RES, CHIP 750 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-884-81	s	RES, CHIP 750 (1005)
R221	1-208-860-81	s	RES, CHIP 75 (1005)
R222	1-208-860-81	s	RES, CHIP 75 (1005)
R223	1-208-860-81	s	RES, CHIP 75 (1005)
R224	1-208-860-81	s	RES, CHIP 75 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-860-81	s	RES, CHIP 75 (1005)
R228	1-208-860-81	s	RES, CHIP 75 (1005)
R229	1-208-860-81	s	RES, CHIP 75 (1005)
R230	1-208-860-81	s	RES, CHIP 75 (1005)
R231	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R232	1-208-860-81	s	RES, CHIP 75 (1005)
R233	1-208-860-81	s	RES, CHIP 75 (1005)
R234	1-208-860-81	s	RES, CHIP 75 (1005)
R235	1-208-860-81	s	RES, CHIP 75 (1005)
R236	1-208-860-81	s	RES, CHIP 75 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-855-81	s	RES, CHIP 47 (1005)
R307	1-208-855-81	s	RES, CHIP 47 (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-884-81	s	RES, CHIP 750 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-884-81	s	RES, CHIP 750 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-884-81	s	RES, CHIP 750 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-884-81	s	RES, CHIP 750 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-860-81	s	RES, CHIP 75 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-860-81	s	RES, CHIP 75 (1005)
R329	1-208-860-81	s	RES, CHIP 75 (1005)
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-208-860-81	s	RES, CHIP 75 (1005)
R335	1-208-860-81	s	RES, CHIP 75 (1005)
R336	1-208-860-81	s	RES, CHIP 75 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-855-81	s	RES, CHIP 47 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-208-884-81	s	RES, CHIP 750 (1005)
R421	1-208-860-81	s	RES, CHIP 75 (1005)
R422	1-208-860-81	s	RES, CHIP 75 (1005)
R423	1-208-860-81	s	RES, CHIP 75 (1005)
R424	1-208-860-81	s	RES, CHIP 75 (1005)
R425	1-208-860-81	s	RES, CHIP 75 (1005)
R426	1-208-860-81	s	RES, CHIP 75 (1005)
R427	1-208-860-81	s	RES, CHIP 75 (1005)
R428	1-208-860-81	s	RES, CHIP 75 (1005)
R429	1-208-860-81	s	RES, CHIP 75 (1005)
R430	1-208-860-81	s	RES, CHIP 75 (1005)
R431	1-208-860-81	s	RES, CHIP 75 (1005)
R432	1-208-860-81	s	RES, CHIP 75 (1005)
R433	1-208-860-81	s	RES, CHIP 75 (1005)
R434	1-208-860-81	s	RES, CHIP 75 (1005)
R435	1-208-860-81	s	RES, CHIP 75 (1005)
R436	1-208-860-81	s	RES, CHIP 75 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-208-884-81	s	RES, CHIP 750 (1005)
R521	1-208-860-81	s	RES, CHIP 75 (1005)
R522	1-208-860-81	s	RES, CHIP 75 (1005)
R523	1-208-860-81	s	RES, CHIP 75 (1005)
R524	1-208-860-81	s	RES, CHIP 75 (1005)
R525	1-208-860-81	s	RES, CHIP 75 (1005)
R526	1-208-860-81	s	RES, CHIP 75 (1005)
R527	1-208-860-81	s	RES, CHIP 75 (1005)
R528	1-208-860-81	s	RES, CHIP 75 (1005)
R529	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-38A BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R530	1-208-860-81	s	RES, CHIP 75 (1005)
R531	1-208-860-81	s	RES, CHIP 75 (1005)
R532	1-208-860-81	s	RES, CHIP 75 (1005)
R533	1-208-860-81	s	RES, CHIP 75 (1005)
R534	1-208-860-81	s	RES, CHIP 75 (1005)
R535	1-208-860-81	s	RES, CHIP 75 (1005)
R536	1-208-860-81	s	RES, CHIP 75 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
RB51	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB52	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER

CNO-38A BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-857-B	s	MOUNTED CIRCUIT BOARD, CNO-38A
10pcs	2-655-586-01	s	SCREW +B M2.6 EG
10pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C5	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C7	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C8	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C9	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C10	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C14	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C15	1-114-533-21	s	CAP, ELECT 330MF
C16	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C17	1-114-533-21	s	CAP, ELECT 330MF
C18	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C120	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C206	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C227	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C230	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C231	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C327	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C328	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C329	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C330	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C406	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C526	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN17	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN19	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC51	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC101	6-713-192-11	s	IC GS2978-CNTE3Z
IC102	6-713-192-11	s	IC GS2978-CNTE3Z
IC103	6-713-192-11	s	IC GS2978-CNTE3Z
IC104	6-713-192-11	s	IC GS2978-CNTE3Z
IC201	6-713-192-11	s	IC GS2978-CNTE3Z
IC202	6-713-192-11	s	IC GS2978-CNTE3Z
IC203	6-713-192-11	s	IC GS2978-CNTE3Z
IC204	6-713-192-11	s	IC GS2978-CNTE3Z
IC301	6-713-192-11	s	IC GS2978-CNTE3Z
IC302	6-713-192-11	s	IC GS2978-CNTE3Z
IC303	6-713-192-11	s	IC GS2978-CNTE3Z
IC304	6-713-192-11	s	IC GS2978-CNTE3Z
IC401	6-713-192-11	s	IC GS2978-CNTE3Z
IC402	6-713-192-11	s	IC GS2978-CNTE3Z
IC403	6-713-192-11	s	IC GS2978-CNTE3Z
IC404	6-713-192-11	s	IC GS2978-CNTE3Z
IC501	6-713-192-11	s	IC GS2978-CNTE3Z
IC502	6-713-192-11	s	IC GS2978-CNTE3Z
IC503	6-713-192-11	s	IC GS2978-CNTE3Z
IC504	6-713-192-11	s	IC GS2978-CNTE3Z
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-400-175-21	s	COIL, CHOKE 47UH
L3	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L105	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L106	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L107	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L108	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L109	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L110	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L111	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L112	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L206	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L207	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L208	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L306	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L307	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L308	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L309	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L310	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L311	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L312	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L406	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L407	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L408	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L409	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L410	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L411	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L412	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L505	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L506	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L507	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L508	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L509	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L510	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L511	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L512	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q4	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q5	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-943-81	s	RES, CHIP 220K (1005)
R4	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-943-81	s	RES, CHIP 220K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-919-81	s	RES, CHIP 22K (1005)
R14	1-208-919-81	s	RES, CHIP 22K (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-943-81	s	RES, CHIP 220K (1005)
R18	1-208-927-81	s	RES, CHIP 47K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R22	1-208-871-81	s	RES, CHIP 220 (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-911-81	s	RES, CHIP 10K (1005)
R26	1-208-855-81	s	RES, CHIP 47 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-863-81	s	RES, CHIP 100 (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-855-81	s	RES, CHIP 47 (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-855-81	s	RES, CHIP 47 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-208-884-81	s	RES, CHIP 750 (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-884-81	s	RES, CHIP 750 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-208-884-81	s	RES, CHIP 750 (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-208-884-81	s	RES, CHIP 750 (1005)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-860-81	s	RES, CHIP 75 (1005)
R126	1-208-860-81	s	RES, CHIP 75 (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-860-81	s	RES, CHIP 75 (1005)
R129	1-208-865-81	s	RES, CHIP 120 (1005)
R130	1-208-865-81	s	RES, CHIP 120 (1005)
R131	1-208-865-81	s	RES, CHIP 120 (1005)
R132	1-208-865-81	s	RES, CHIP 120 (1005)
R133	1-208-865-81	s	RES, CHIP 120 (1005)
R134	1-208-865-81	s	RES, CHIP 120 (1005)
R135	1-208-865-81	s	RES, CHIP 120 (1005)
R136	1-208-865-81	s	RES, CHIP 120 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-911-81	s	RES, CHIP 10K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-863-81	s	RES, CHIP 100 (1005)
R146	1-208-863-81	s	RES, CHIP 100 (1005)
R147	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-863-81	s	RES, CHIP 100 (1005)
R155	1-208-911-81	s	RES, CHIP 10K (1005)
R156	1-208-911-81	s	RES, CHIP 10K (1005)
R163	1-208-911-81	s	RES, CHIP 10K (1005)
R164	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-208-855-81	s	RES, CHIP 47 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-208-884-81	s	RES, CHIP 750 (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-208-884-81	s	RES, CHIP 750 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-884-81	s	RES, CHIP 750 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-884-81	s	RES, CHIP 750 (1005)
R221	1-208-860-81	s	RES, CHIP 75 (1005)
R222	1-208-860-81	s	RES, CHIP 75 (1005)
R223	1-208-860-81	s	RES, CHIP 75 (1005)
R224	1-208-860-81	s	RES, CHIP 75 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-860-81	s	RES, CHIP 75 (1005)
R228	1-208-860-81	s	RES, CHIP 75 (1005)
R229	1-208-865-81	s	RES, CHIP 120 (1005)
R230	1-208-865-81	s	RES, CHIP 120 (1005)
R231	1-208-865-81	s	RES, CHIP 120 (1005)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R232	1-208-865-81	s	RES, CHIP 120 (1005)
R233	1-208-865-81	s	RES, CHIP 120 (1005)
R234	1-208-865-81	s	RES, CHIP 120 (1005)
R235	1-208-865-81	s	RES, CHIP 120 (1005)
R236	1-208-865-81	s	RES, CHIP 120 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-863-81	s	RES, CHIP 100 (1005)
R246	1-208-863-81	s	RES, CHIP 100 (1005)
R247	1-208-863-81	s	RES, CHIP 100 (1005)
R248	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-911-81	s	RES, CHIP 10K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-855-81	s	RES, CHIP 47 (1005)
R307	1-208-855-81	s	RES, CHIP 47 (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-884-81	s	RES, CHIP 750 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-884-81	s	RES, CHIP 750 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-884-81	s	RES, CHIP 750 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-884-81	s	RES, CHIP 750 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-860-81	s	RES, CHIP 75 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-860-81	s	RES, CHIP 75 (1005)
R329	1-208-865-81	s	RES, CHIP 120 (1005)
R330	1-208-865-81	s	RES, CHIP 120 (1005)
R331	1-208-865-81	s	RES, CHIP 120 (1005)
R332	1-208-865-81	s	RES, CHIP 120 (1005)
R333	1-208-865-81	s	RES, CHIP 120 (1005)
R334	1-208-865-81	s	RES, CHIP 120 (1005)
R335	1-208-865-81	s	RES, CHIP 120 (1005)
R336	1-208-865-81	s	RES, CHIP 120 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-863-81	s	RES, CHIP 100 (1005)
R346	1-208-863-81	s	RES, CHIP 100 (1005)
R347	1-208-863-81	s	RES, CHIP 100 (1005)
R348	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R363	1-208-911-81	s	RES, CHIP 10K (1005)
R364	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-855-81	s	RES, CHIP 47 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-208-884-81	s	RES, CHIP 750 (1005)
R421	1-208-860-81	s	RES, CHIP 75 (1005)
R422	1-208-860-81	s	RES, CHIP 75 (1005)
R423	1-208-860-81	s	RES, CHIP 75 (1005)
R424	1-208-860-81	s	RES, CHIP 75 (1005)
R425	1-208-860-81	s	RES, CHIP 75 (1005)
R426	1-208-860-81	s	RES, CHIP 75 (1005)
R427	1-208-860-81	s	RES, CHIP 75 (1005)
R428	1-208-860-81	s	RES, CHIP 75 (1005)
R429	1-208-865-81	s	RES, CHIP 120 (1005)
R430	1-208-865-81	s	RES, CHIP 120 (1005)
R431	1-208-865-81	s	RES, CHIP 120 (1005)
R432	1-208-865-81	s	RES, CHIP 120 (1005)
R433	1-208-865-81	s	RES, CHIP 120 (1005)
R434	1-208-865-81	s	RES, CHIP 120 (1005)
R435	1-208-865-81	s	RES, CHIP 120 (1005)
R436	1-208-865-81	s	RES, CHIP 120 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-208-863-81	s	RES, CHIP 100 (1005)
R455	1-208-911-81	s	RES, CHIP 10K (1005)
R456	1-208-911-81	s	RES, CHIP 10K (1005)
R463	1-208-911-81	s	RES, CHIP 10K (1005)
R464	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38A BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-208-884-81	s	RES, CHIP 750 (1005)
R521	1-208-860-81	s	RES, CHIP 75 (1005)
R522	1-208-860-81	s	RES, CHIP 75 (1005)
R523	1-208-860-81	s	RES, CHIP 75 (1005)
R524	1-208-860-81	s	RES, CHIP 75 (1005)
R525	1-208-860-81	s	RES, CHIP 75 (1005)
R526	1-208-860-81	s	RES, CHIP 75 (1005)
R527	1-208-860-81	s	RES, CHIP 75 (1005)
R528	1-208-860-81	s	RES, CHIP 75 (1005)
R529	1-208-865-81	s	RES, CHIP 120 (1005)
R530	1-208-865-81	s	RES, CHIP 120 (1005)
R531	1-208-865-81	s	RES, CHIP 120 (1005)
R532	1-208-865-81	s	RES, CHIP 120 (1005)
R533	1-208-865-81	s	RES, CHIP 120 (1005)
R534	1-208-865-81	s	RES, CHIP 120 (1005)
R535	1-208-865-81	s	RES, CHIP 120 (1005)
R536	1-208-865-81	s	RES, CHIP 120 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R546	1-208-863-81	s	RES, CHIP 100 (1005)
R547	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-208-863-81	s	RES, CHIP 100 (1005)
R555	1-208-911-81	s	RES, CHIP 10K (1005)
R556	1-208-911-81	s	RES, CHIP 10K (1005)
R563	1-208-911-81	s	RES, CHIP 10K (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
RB51	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB52	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER

CNO-38B BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-858-A	s	MOUNTED CIRCUIT BOARD, CNO-38B
20pcs	2-655-586-01	s	SCREW +B M2.6 EG
20pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C5	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C6	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C7	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C8	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C14	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C15	1-100-986-21	s	CAP, ELECT 330MF
C16	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C17	1-100-986-21	s	CAP, ELECT 330MF
C18	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C120	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C206	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C227	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C230	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C231	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C327	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C328	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C329	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C330	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C406	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C526	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN2	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN3	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN4	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN5	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN6	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN7	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN8	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN9	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN10	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN11	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN12	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN13	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN14	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN15	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN16	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN17	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN18	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-793-324-21	s	CONNECTOR, COAXIAL (BNC TYPE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC51	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC101	6-713-192-01	s	IC GS2978-CNE3
IC102	6-713-192-01	s	IC GS2978-CNE3
IC103	6-713-192-01	s	IC GS2978-CNE3
IC104	6-713-192-01	s	IC GS2978-CNE3
IC201	6-713-192-01	s	IC GS2978-CNE3
IC202	6-713-192-01	s	IC GS2978-CNE3
IC203	6-713-192-01	s	IC GS2978-CNE3
IC204	6-713-192-01	s	IC GS2978-CNE3
IC301	6-713-192-01	s	IC GS2978-CNE3
IC302	6-713-192-01	s	IC GS2978-CNE3
IC303	6-713-192-01	s	IC GS2978-CNE3
IC304	6-713-192-01	s	IC GS2978-CNE3
IC401	6-713-192-01	s	IC GS2978-CNE3
IC402	6-713-192-01	s	IC GS2978-CNE3
IC403	6-713-192-01	s	IC GS2978-CNE3
IC404	6-713-192-01	s	IC GS2978-CNE3

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC501	6-713-192-01	s	IC GS2978-CNE3
IC502	6-713-192-01	s	IC GS2978-CNE3
IC503	6-713-192-01	s	IC GS2978-CNE3
IC504	6-713-192-01	s	IC GS2978-CNE3
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-400-175-21	s	COIL, CHOKE 47UH
L3	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L105	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L106	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L107	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L108	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L109	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L110	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L111	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L112	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L206	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L207	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L208	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L209	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L210	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L211	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L212	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L306	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L307	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L308	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L309	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L310	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L311	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L312	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L406	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L407	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L408	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L409	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L410	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L411	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L412	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L505	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L506	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L507	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L508	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L509	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L510	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L511	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L512	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
PS1	⚠ 1-576-677-21	s	LINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q4	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q5	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-943-81	s	RES, CHIP 220K (1005)
R4	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-943-81	s	RES, CHIP 220K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-715-11	s	RES, CHIP 22K (1005)
R14	1-208-715-11	s	RES, CHIP 22K (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-943-81	s	RES, CHIP 220K (1005)
R18	1-208-927-81	s	RES, CHIP 47K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R22	1-208-871-81	s	RES, CHIP 220 (1005)
R23	1-208-715-11	s	RES, CHIP 22K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-911-81	s	RES, CHIP 10K (1005)
R26	1-208-855-81	s	RES, CHIP 47 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-863-81	s	RES, CHIP 100 (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-855-81	s	RES, CHIP 47 (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-855-81	s	RES, CHIP 47 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-208-884-81	s	RES, CHIP 750 (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-884-81	s	RES, CHIP 750 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-208-884-81	s	RES, CHIP 750 (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-208-884-81	s	RES, CHIP 750 (1005)
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-860-81	s	RES, CHIP 75 (1005)
R126	1-208-860-81	s	RES, CHIP 75 (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-860-81	s	RES, CHIP 75 (1005)
R129	1-208-860-81	s	RES, CHIP 75 (1005)
R130	1-208-860-81	s	RES, CHIP 75 (1005)
R131	1-208-860-81	s	RES, CHIP 75 (1005)
R132	1-208-860-81	s	RES, CHIP 75 (1005)
R133	1-208-860-81	s	RES, CHIP 75 (1005)
R134	1-208-860-81	s	RES, CHIP 75 (1005)
R135	1-208-860-81	s	RES, CHIP 75 (1005)
R136	1-208-860-81	s	RES, CHIP 75 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-911-81	s	RES, CHIP 10K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-208-855-81	s	RES, CHIP 47 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-208-884-81	s	RES, CHIP 750 (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-208-884-81	s	RES, CHIP 750 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-884-81	s	RES, CHIP 750 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-884-81	s	RES, CHIP 750 (1005)
R221	1-208-860-81	s	RES, CHIP 75 (1005)
R222	1-208-860-81	s	RES, CHIP 75 (1005)
R223	1-208-860-81	s	RES, CHIP 75 (1005)
R224	1-208-860-81	s	RES, CHIP 75 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-860-81	s	RES, CHIP 75 (1005)
R228	1-208-860-81	s	RES, CHIP 75 (1005)
R229	1-208-860-81	s	RES, CHIP 75 (1005)
R230	1-208-860-81	s	RES, CHIP 75 (1005)
R231	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R232	1-208-860-81	s	RES, CHIP 75 (1005)
R233	1-208-860-81	s	RES, CHIP 75 (1005)
R234	1-208-860-81	s	RES, CHIP 75 (1005)
R235	1-208-860-81	s	RES, CHIP 75 (1005)
R236	1-208-860-81	s	RES, CHIP 75 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-855-81	s	RES, CHIP 47 (1005)
R307	1-208-855-81	s	RES, CHIP 47 (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-884-81	s	RES, CHIP 750 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-884-81	s	RES, CHIP 750 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-884-81	s	RES, CHIP 750 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-884-81	s	RES, CHIP 750 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-860-81	s	RES, CHIP 75 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-860-81	s	RES, CHIP 75 (1005)
R329	1-208-860-81	s	RES, CHIP 75 (1005)
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-208-860-81	s	RES, CHIP 75 (1005)
R335	1-208-860-81	s	RES, CHIP 75 (1005)
R336	1-208-860-81	s	RES, CHIP 75 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-855-81	s	RES, CHIP 47 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-208-884-81	s	RES, CHIP 750 (1005)
R421	1-208-860-81	s	RES, CHIP 75 (1005)
R422	1-208-860-81	s	RES, CHIP 75 (1005)
R423	1-208-860-81	s	RES, CHIP 75 (1005)
R424	1-208-860-81	s	RES, CHIP 75 (1005)
R425	1-208-860-81	s	RES, CHIP 75 (1005)
R426	1-208-860-81	s	RES, CHIP 75 (1005)
R427	1-208-860-81	s	RES, CHIP 75 (1005)
R428	1-208-860-81	s	RES, CHIP 75 (1005)
R429	1-208-860-81	s	RES, CHIP 75 (1005)
R430	1-208-860-81	s	RES, CHIP 75 (1005)
R431	1-208-860-81	s	RES, CHIP 75 (1005)
R432	1-208-860-81	s	RES, CHIP 75 (1005)
R433	1-208-860-81	s	RES, CHIP 75 (1005)
R434	1-208-860-81	s	RES, CHIP 75 (1005)
R435	1-208-860-81	s	RES, CHIP 75 (1005)
R436	1-208-860-81	s	RES, CHIP 75 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-208-884-81	s	RES, CHIP 750 (1005)
R521	1-208-860-81	s	RES, CHIP 75 (1005)
R522	1-208-860-81	s	RES, CHIP 75 (1005)
R523	1-208-860-81	s	RES, CHIP 75 (1005)
R524	1-208-860-81	s	RES, CHIP 75 (1005)
R525	1-208-860-81	s	RES, CHIP 75 (1005)
R526	1-208-860-81	s	RES, CHIP 75 (1005)
R527	1-208-860-81	s	RES, CHIP 75 (1005)
R528	1-208-860-81	s	RES, CHIP 75 (1005)
R529	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-38B BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R530	1-208-860-81	s	RES, CHIP 75 (1005)
R531	1-208-860-81	s	RES, CHIP 75 (1005)
R532	1-208-860-81	s	RES, CHIP 75 (1005)
R533	1-208-860-81	s	RES, CHIP 75 (1005)
R534	1-208-860-81	s	RES, CHIP 75 (1005)
R535	1-208-860-81	s	RES, CHIP 75 (1005)
R536	1-208-860-81	s	RES, CHIP 75 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
RB51	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB52	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER

CNO-38B BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-858-B	s	MOUNTED CIRCUIT BOARD, CNO-38B
10pcs	2-655-586-01	s	SCREW +B M2.6 EG
10pcs	3-637-901-02	s	SCREW M2.6X5
2pcs	3-725-295-21	s	SCREW, (+) (B3)
1pc	4-183-449-01	s	PC BOARD GUARD RL
1pc	4-183-450-01	s	PC BOARD GUARD RR
1pc	7-626-320-61	s	PIN, SPRING 3X18
2pcs	7-682-951-01	s	SCREW +PSW 3X14
2pcs	A-1771-685-A	s	BOARD LEVER R ASSY
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C5	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6	1-116-045-91	s	CAP, CERAMIC 4.7MF B 2012
C7	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C8	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C9	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C10	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C13	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C14	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C15	1-114-533-21	s	CAP, ELECT 330MF
C16	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C17	1-114-533-21	s	CAP, ELECT 330MF
C18	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C117	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C118	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C120	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C204	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C205	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C206	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C217	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C224	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C225	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C227	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C230	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C231	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C318	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C327	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C328	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C329	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C330	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C332	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C403	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C404	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C406	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C425	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C426	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C427	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C428	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C431	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C432	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C517	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C518	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C521	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C522	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C524	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C525	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C526	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C527	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C528	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C530	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C531	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN17	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN19	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
D1	8-719-069-28	s	DI 1SS400FJTE61
D2	6-502-197-01	s	DI SML-D12M8WT86SM
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC51	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC101	6-713-192-11	s	IC GS2978-CNTE3Z
IC102	6-713-192-11	s	IC GS2978-CNTE3Z
IC103	6-713-192-11	s	IC GS2978-CNTE3Z
IC104	6-713-192-11	s	IC GS2978-CNTE3Z
IC201	6-713-192-11	s	IC GS2978-CNTE3Z
IC202	6-713-192-11	s	IC GS2978-CNTE3Z
IC203	6-713-192-11	s	IC GS2978-CNTE3Z
IC204	6-713-192-11	s	IC GS2978-CNTE3Z
IC301	6-713-192-11	s	IC GS2978-CNTE3Z
IC302	6-713-192-11	s	IC GS2978-CNTE3Z
IC303	6-713-192-11	s	IC GS2978-CNTE3Z
IC304	6-713-192-11	s	IC GS2978-CNTE3Z
IC401	6-713-192-11	s	IC GS2978-CNTE3Z
IC402	6-713-192-11	s	IC GS2978-CNTE3Z
IC403	6-713-192-11	s	IC GS2978-CNTE3Z
IC404	6-713-192-11	s	IC GS2978-CNTE3Z
IC501	6-713-192-11	s	IC GS2978-CNTE3Z
IC502	6-713-192-11	s	IC GS2978-CNTE3Z
IC503	6-713-192-11	s	IC GS2978-CNTE3Z
IC504	6-713-192-11	s	IC GS2978-CNTE3Z
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-400-175-21	s	COIL, CHOKE 47UH
L3	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
L103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L105	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L106	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L107	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L108	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L109	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L110	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L111	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L112	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L205	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L206	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L207	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L208	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L305	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L306	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L307	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L308	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L309	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L310	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L311	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L312	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L405	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L406	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L407	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L408	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L409	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L410	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L411	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L412	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L505	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L506	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L507	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L508	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L509	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L510	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L511	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L512	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q3	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q4	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q5	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-943-81	s	RES, CHIP 220K (1005)
R4	1-208-927-81	s	RES, CHIP 47K (1005)
R5	1-208-903-81	s	RES, CHIP 4.7K (1005)
R6	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-943-81	s	RES, CHIP 220K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-919-81	s	RES, CHIP 22K (1005)
R14	1-208-919-81	s	RES, CHIP 22K (1005)
R15	1-208-871-81	s	RES, CHIP 220 (1005)
R16	1-208-871-81	s	RES, CHIP 220 (1005)
R17	1-208-943-81	s	RES, CHIP 220K (1005)
R18	1-208-927-81	s	RES, CHIP 47K (1005)
R19	1-208-935-81	s	RES, CHIP 100K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-863-81	s	RES, CHIP 100 (1005)
R22	1-208-871-81	s	RES, CHIP 220 (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-927-81	s	RES, CHIP 47K (1005)
R25	1-208-911-81	s	RES, CHIP 10K (1005)
R26	1-208-855-81	s	RES, CHIP 47 (1005)
R27	1-208-863-81	s	RES, CHIP 100 (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R51	1-208-863-81	s	RES, CHIP 100 (1005)
R52	1-208-863-81	s	RES, CHIP 100 (1005)
R53	1-208-863-81	s	RES, CHIP 100 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R55	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-855-81	s	RES, CHIP 47 (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-855-81	s	RES, CHIP 47 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R114	1-208-884-81	s	RES, CHIP 750 (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-884-81	s	RES, CHIP 750 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-208-884-81	s	RES, CHIP 750 (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R120	1-208-884-81	s	RES, CHIP 750 (1005)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-860-81	s	RES, CHIP 75 (1005)
R126	1-208-860-81	s	RES, CHIP 75 (1005)
R127	1-208-860-81	s	RES, CHIP 75 (1005)
R128	1-208-860-81	s	RES, CHIP 75 (1005)
R129	1-208-865-81	s	RES, CHIP 120 (1005)
R130	1-208-865-81	s	RES, CHIP 120 (1005)
R131	1-208-865-81	s	RES, CHIP 120 (1005)
R132	1-208-865-81	s	RES, CHIP 120 (1005)
R133	1-208-865-81	s	RES, CHIP 120 (1005)
R134	1-208-865-81	s	RES, CHIP 120 (1005)
R135	1-208-865-81	s	RES, CHIP 120 (1005)
R136	1-208-865-81	s	RES, CHIP 120 (1005)
R137	1-208-860-81	s	RES, CHIP 75 (1005)
R138	1-208-860-81	s	RES, CHIP 75 (1005)
R139	1-208-860-81	s	RES, CHIP 75 (1005)
R140	1-208-860-81	s	RES, CHIP 75 (1005)
R141	1-208-911-81	s	RES, CHIP 10K (1005)
R142	1-208-911-81	s	RES, CHIP 10K (1005)
R143	1-208-911-81	s	RES, CHIP 10K (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-863-81	s	RES, CHIP 100 (1005)
R146	1-208-863-81	s	RES, CHIP 100 (1005)
R147	1-208-863-81	s	RES, CHIP 100 (1005)
R148	1-208-863-81	s	RES, CHIP 100 (1005)
R155	1-208-911-81	s	RES, CHIP 10K (1005)
R156	1-208-911-81	s	RES, CHIP 10K (1005)
R163	1-208-911-81	s	RES, CHIP 10K (1005)
R164	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-855-81	s	RES, CHIP 47 (1005)
R202	1-208-855-81	s	RES, CHIP 47 (1005)
R203	1-208-855-81	s	RES, CHIP 47 (1005)
R204	1-208-855-81	s	RES, CHIP 47 (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R206	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-208-884-81	s	RES, CHIP 750 (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-208-884-81	s	RES, CHIP 750 (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-884-81	s	RES, CHIP 750 (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-884-81	s	RES, CHIP 750 (1005)
R221	1-208-860-81	s	RES, CHIP 75 (1005)
R222	1-208-860-81	s	RES, CHIP 75 (1005)
R223	1-208-860-81	s	RES, CHIP 75 (1005)
R224	1-208-860-81	s	RES, CHIP 75 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-860-81	s	RES, CHIP 75 (1005)
R228	1-208-860-81	s	RES, CHIP 75 (1005)
R229	1-208-865-81	s	RES, CHIP 120 (1005)
R230	1-208-865-81	s	RES, CHIP 120 (1005)
R231	1-208-865-81	s	RES, CHIP 120 (1005)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R232	1-208-865-81	s	RES, CHIP 120 (1005)
R233	1-208-865-81	s	RES, CHIP 120 (1005)
R234	1-208-865-81	s	RES, CHIP 120 (1005)
R235	1-208-865-81	s	RES, CHIP 120 (1005)
R236	1-208-865-81	s	RES, CHIP 120 (1005)
R237	1-208-860-81	s	RES, CHIP 75 (1005)
R238	1-208-860-81	s	RES, CHIP 75 (1005)
R239	1-208-860-81	s	RES, CHIP 75 (1005)
R240	1-208-860-81	s	RES, CHIP 75 (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-911-81	s	RES, CHIP 10K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-863-81	s	RES, CHIP 100 (1005)
R246	1-208-863-81	s	RES, CHIP 100 (1005)
R247	1-208-863-81	s	RES, CHIP 100 (1005)
R248	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-911-81	s	RES, CHIP 10K (1005)
R256	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-911-81	s	RES, CHIP 10K (1005)
R264	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-855-81	s	RES, CHIP 47 (1005)
R303	1-208-855-81	s	RES, CHIP 47 (1005)
R304	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-855-81	s	RES, CHIP 47 (1005)
R307	1-208-855-81	s	RES, CHIP 47 (1005)
R308	1-208-855-81	s	RES, CHIP 47 (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-884-81	s	RES, CHIP 750 (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-884-81	s	RES, CHIP 750 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-208-884-81	s	RES, CHIP 750 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-884-81	s	RES, CHIP 750 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-860-81	s	RES, CHIP 75 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-860-81	s	RES, CHIP 75 (1005)
R329	1-208-865-81	s	RES, CHIP 120 (1005)
R330	1-208-865-81	s	RES, CHIP 120 (1005)
R331	1-208-865-81	s	RES, CHIP 120 (1005)
R332	1-208-865-81	s	RES, CHIP 120 (1005)
R333	1-208-865-81	s	RES, CHIP 120 (1005)
R334	1-208-865-81	s	RES, CHIP 120 (1005)
R335	1-208-865-81	s	RES, CHIP 120 (1005)
R336	1-208-865-81	s	RES, CHIP 120 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-860-81	s	RES, CHIP 75 (1005)
R339	1-208-860-81	s	RES, CHIP 75 (1005)
R340	1-208-860-81	s	RES, CHIP 75 (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-863-81	s	RES, CHIP 100 (1005)
R346	1-208-863-81	s	RES, CHIP 100 (1005)
R347	1-208-863-81	s	RES, CHIP 100 (1005)
R348	1-208-863-81	s	RES, CHIP 100 (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R363	1-208-911-81	s	RES, CHIP 10K (1005)
R364	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-855-81	s	RES, CHIP 47 (1005)
R402	1-208-855-81	s	RES, CHIP 47 (1005)
R403	1-208-855-81	s	RES, CHIP 47 (1005)
R404	1-208-855-81	s	RES, CHIP 47 (1005)
R405	1-208-855-81	s	RES, CHIP 47 (1005)
R406	1-208-855-81	s	RES, CHIP 47 (1005)
R407	1-208-855-81	s	RES, CHIP 47 (1005)
R408	1-208-855-81	s	RES, CHIP 47 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-208-884-81	s	RES, CHIP 750 (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-208-884-81	s	RES, CHIP 750 (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-208-884-81	s	RES, CHIP 750 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-208-884-81	s	RES, CHIP 750 (1005)
R421	1-208-860-81	s	RES, CHIP 75 (1005)
R422	1-208-860-81	s	RES, CHIP 75 (1005)
R423	1-208-860-81	s	RES, CHIP 75 (1005)
R424	1-208-860-81	s	RES, CHIP 75 (1005)
R425	1-208-860-81	s	RES, CHIP 75 (1005)
R426	1-208-860-81	s	RES, CHIP 75 (1005)
R427	1-208-860-81	s	RES, CHIP 75 (1005)
R428	1-208-860-81	s	RES, CHIP 75 (1005)
R429	1-208-865-81	s	RES, CHIP 120 (1005)
R430	1-208-865-81	s	RES, CHIP 120 (1005)
R431	1-208-865-81	s	RES, CHIP 120 (1005)
R432	1-208-865-81	s	RES, CHIP 120 (1005)
R433	1-208-865-81	s	RES, CHIP 120 (1005)
R434	1-208-865-81	s	RES, CHIP 120 (1005)
R435	1-208-865-81	s	RES, CHIP 120 (1005)
R436	1-208-865-81	s	RES, CHIP 120 (1005)
R437	1-208-860-81	s	RES, CHIP 75 (1005)
R438	1-208-860-81	s	RES, CHIP 75 (1005)
R439	1-208-860-81	s	RES, CHIP 75 (1005)
R440	1-208-860-81	s	RES, CHIP 75 (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-911-81	s	RES, CHIP 10K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R448	1-208-863-81	s	RES, CHIP 100 (1005)
R455	1-208-911-81	s	RES, CHIP 10K (1005)
R456	1-208-911-81	s	RES, CHIP 10K (1005)
R463	1-208-911-81	s	RES, CHIP 10K (1005)
R464	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-38B BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-884-81	s	RES, CHIP 750 (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-208-884-81	s	RES, CHIP 750 (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-208-884-81	s	RES, CHIP 750 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-208-884-81	s	RES, CHIP 750 (1005)
R521	1-208-860-81	s	RES, CHIP 75 (1005)
R522	1-208-860-81	s	RES, CHIP 75 (1005)
R523	1-208-860-81	s	RES, CHIP 75 (1005)
R524	1-208-860-81	s	RES, CHIP 75 (1005)
R525	1-208-860-81	s	RES, CHIP 75 (1005)
R526	1-208-860-81	s	RES, CHIP 75 (1005)
R527	1-208-860-81	s	RES, CHIP 75 (1005)
R528	1-208-860-81	s	RES, CHIP 75 (1005)
R529	1-208-865-81	s	RES, CHIP 120 (1005)
R530	1-208-865-81	s	RES, CHIP 120 (1005)
R531	1-208-865-81	s	RES, CHIP 120 (1005)
R532	1-208-865-81	s	RES, CHIP 120 (1005)
R533	1-208-865-81	s	RES, CHIP 120 (1005)
R534	1-208-865-81	s	RES, CHIP 120 (1005)
R535	1-208-865-81	s	RES, CHIP 120 (1005)
R536	1-208-865-81	s	RES, CHIP 120 (1005)
R537	1-208-860-81	s	RES, CHIP 75 (1005)
R538	1-208-860-81	s	RES, CHIP 75 (1005)
R539	1-208-860-81	s	RES, CHIP 75 (1005)
R540	1-208-860-81	s	RES, CHIP 75 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R546	1-208-863-81	s	RES, CHIP 100 (1005)
R547	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-208-863-81	s	RES, CHIP 100 (1005)
R555	1-208-911-81	s	RES, CHIP 10K (1005)
R556	1-208-911-81	s	RES, CHIP 10K (1005)
R563	1-208-911-81	s	RES, CHIP 10K (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
RB51	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB52	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER

DVP-53 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
1pc	3-531-576-51	o	RIVET
1pc	3-561-426-01	s	CUSHION
13pcs	4-143-557-01	s	SPRING, COMPRESSION
13pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
1pc	4-183-612-01	s	SHEET, WIND SHIELDING
2pcs	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	4-187-619-01	s	SHEET,RADIATION(25X25X2)
6pcs	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
2pcs	6-714-073-01	s	IC 88E1118R-A0-NNC2C000
1pc	7-626-320-61	s	PIN, SPRING 3X18
4pcs	7-682-549-09	s	SCREW +B 3X10
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C200	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C201	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C239	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C240	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C243	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C244	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C245	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C246	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C247	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C248	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C249	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C250	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C251	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C252	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C253	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C254	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C255	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C256	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C257	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C258	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C259	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C260	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C261	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C262	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C263	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C264	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C265	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C266	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C267	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C268	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C269	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C270	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C271	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C272	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C273	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C274	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C275	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C276	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C277	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C278	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C279	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C280	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C281	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C282	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C283	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C284	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C285	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C286	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C287	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C288	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C289	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C290	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C291	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C292	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C293	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C294	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C295	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C296	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C297	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C298	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C299	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C300	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C301	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C302	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C303	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C304	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C305	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C404	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C405	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C409	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C410	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C411	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C412	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C414	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C416	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C419	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C421	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C422	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C509	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C510	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C512	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C514	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C517	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C519	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C521	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C523	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C525	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C527	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C541	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C542	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C546	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C548	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C552	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C553	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C555	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C556	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C557	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C558	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C560	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C561	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C562	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C710	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C712	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C713	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C714	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C715	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C716	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C717	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C735	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C736	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C737	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C738	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C803	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C807	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C809	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C909	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C910	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C911	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C912	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C913	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C914	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C915	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C916	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C917	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C920	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C924	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C935	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C936	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C947	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C948	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C950	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C951	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C953	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C955	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C957	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1004	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1005	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1010	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1017	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1018	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1026	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1027	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1028	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1034	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1035	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1036	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1038	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1040	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1101	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1117	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1119	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1121	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1123	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1201	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1205	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1207	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1217	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1218	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1219	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1220	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1222	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1223	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1224	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1301	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1303	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1305	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1307	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1501	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1503	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1504	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1505	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1506	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1507	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1508	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1509	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1901	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1902	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1903	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1904	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1905	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1906	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1907	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1908	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1909	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1910	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1911	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1912	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1913	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1914	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1915	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1916	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1917	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1918	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1919	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1920	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1921	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1922	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1923	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1924	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2109	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2110	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2111	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2112	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2113	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2114	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2118	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2119	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2120	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2121	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2122	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2123	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2124	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2205	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2218	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2219	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2223	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2320	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2328	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2330	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2332	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2334	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2418	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2421	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2422	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2424	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2426	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2428	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2433	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2434	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2435	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2437	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2528	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2610	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2618	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2619	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2621	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2622	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2624	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2632	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2633	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2634	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2635	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2637	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2718	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2722	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2724	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2728	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2730	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2734	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2801	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2805	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2819	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2910	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2918	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2919	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2924	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2932	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2937	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3014	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3016	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3018	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3022	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3024	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3026	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3027	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3028	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3030	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3032	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3132	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3203	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3207	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3217	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3219	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3223	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3225	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3227	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3319	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3321	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3328	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3330	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3332	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3333	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3335	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3337	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3341	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3418	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3420	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3422	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3424	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3426	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3428	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3432	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3434	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3519	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3521	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3528	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3532	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3541	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3610	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3618	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3620	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3622	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3624	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3634	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3701	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3702	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3719	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3723	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3810	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3812	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3814	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3816	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3818	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3819	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3821	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3822	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3824	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3826	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3828	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3830	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3832	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3837	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3910	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3918	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3919	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3920	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3924	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3928	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3932	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3933	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4014	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4016	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4018	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4022	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4024	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4026	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4027	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4028	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4030	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4032	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4117	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4119	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4121	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4123	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4125	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4202	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4218	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4222	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4224	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4226	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4228	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4230	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4232	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4233	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4235	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4237	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4320	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4328	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4330	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4332	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4334	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4418	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4421	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4422	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4424	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4426	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4428	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4432	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4435	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4437	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4528	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4603	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4604	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4605	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4607	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4608	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4609	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4611	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4613	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4614	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4618	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4619	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4621	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4623	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4625	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4627	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4701	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4702	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4703	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4704	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4705	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4706	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4707	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4708	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4709	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4710	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4711	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4712	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4713	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4714	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4717	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4718	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4719	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4720	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4735	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4736	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4737	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4739	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4741	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4743	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4746	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4747	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4748	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4749	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4751	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4753	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4755	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4757	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4759	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4761	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4762	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4763	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4765	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4767	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4769	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4770	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4772	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4774	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4776	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4777	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4779	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4780	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4781	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4783	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4785	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4787	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4789	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4791	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4793	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4794	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4803	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4804	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4805	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4806	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4807	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4808	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4809	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4810	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4811	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4812	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4813	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4814	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4817	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4818	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4819	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4820	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4823	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4825	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4827	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4829	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4831	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4837	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4839	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4841	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4843	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4845	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4847	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4849	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4851	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4853	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4855	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4857	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4859	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4861	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4862	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4863	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4865	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4867	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4868	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4869	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4870	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4872	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4874	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4876	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4877	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4879	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4881	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4882	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4883	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4885	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4887	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4889	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4891	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4893	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4894	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4902	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4907	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4911	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4912	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4915	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4927	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4938	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4939	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4941	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4944	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4945	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4946	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4950	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4953	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4954	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4957	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4975	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4977	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4979	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4980	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4984	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4991	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4995	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4999	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5001	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5030	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5032	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5033	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5036	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5038	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5040	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5042	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5043	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5044	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5045	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5046	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5047	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5048	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5049	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5050	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5051	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5052	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5053	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5054	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5055	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5056	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5057	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5058	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5059	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5060	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5061	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5062	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5063	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5064	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5065	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5066	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5067	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5068	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5069	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5070	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5071	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5072	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5073	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5074	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5075	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5076	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5077	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5078	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5079	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5080	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5081	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5082	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5083	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5084	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5085	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5087	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5089	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5091	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5093	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5095	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5096	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5097	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5119	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5123	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5138	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5139	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5141	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5144	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5146	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5149	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5150	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5153	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5154	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5158	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5161	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5168	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5172	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5175	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5180	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5184	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5187	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5189	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5191	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5195	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5199	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5201	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5211	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5213	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5215	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5223	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5225	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5227	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5229	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5230	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5231	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5232	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5233	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5235	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5237	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5239	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5240	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5241	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5242	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5243	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5244	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5245	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5246	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5247	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5248	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5250	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5251	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5252	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5254	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5256	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5257	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5258	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5260	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5261	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5262	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5263	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5264	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5265	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5266	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5267	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5268	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5269	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5270	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5271	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5272	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5273	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5274	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5275	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5276	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5277	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5278	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5279	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5280	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5281	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5282	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5283	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5284	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5286	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5287	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5289	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5291	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5293	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5295	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5296	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5297	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5303	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5307	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5318	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5323	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5327	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5330	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5333	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5334	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5338	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5339	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5341	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5343	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5344	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5345	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5346	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5349	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5353	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5354	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5361	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5364	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5365	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5368	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5369	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5371	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5372	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5373	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5375	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5379	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5380	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5383	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5384	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5385	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5386	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5388	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5389	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5390	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5391	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5393	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5395	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5397	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5399	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5401	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5411	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5413	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5415	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5421	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5423	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5427	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5429	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5431	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5432	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5433	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5434	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5435	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5436	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5437	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5438	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5439	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5440	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5441	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5442	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5443	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5444	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5445	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5446	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5447	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5448	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5449	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5450	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5452	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5453	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5454	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5455	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5456	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5457	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5458	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5459	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5460	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5461	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5462	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5463	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5464	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5465	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5466	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5467	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5468	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5469	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5470	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5471	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5472	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5473	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5474	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5475	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5476	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5477	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5478	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5479	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5480	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5481	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5482	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5483	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5484	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5485	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5486	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5487	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5488	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5489	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5490	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5491	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5492	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5493	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5494	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5495	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5496	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5497	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5523	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5541	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5546	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5553	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5557	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5558	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5560	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5561	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5562	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5564	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5565	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5567	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5568	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5569	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5572	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5573	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5575	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5577	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5579	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5580	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5581	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5583	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5584	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5585	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5586	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5587	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5589	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5590	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5591	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5593	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5595	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5597	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5598	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5599	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5600	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5601	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5609	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5611	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5613	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5615	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5621	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5623	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5625	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5627	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5629	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5631	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5633	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5634	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5635	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5636	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5637	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5638	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5639	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5640	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5641	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5642	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5643	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5644	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5645	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5646	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5647	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5648	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5649	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5650	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5651	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5652	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5653	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5654	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5655	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5656	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5657	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5658	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5659	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5660	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5661	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5662	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5663	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5664	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5665	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5666	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5667	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5668	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5669	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5670	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5671	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5672	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5673	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5674	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5675	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5676	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5677	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5678	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5679	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5680	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5681	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5682	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5683	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5685	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5686	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5689	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5690	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5691	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5692	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5693	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5694	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5695	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5696	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5697	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5711	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5734	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5738	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5739	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5741	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5744	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5749	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5751	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5753	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5757	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5761	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5762	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5764	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5765	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5767	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5768	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5769	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5772	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5773	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5774	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5775	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5779	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5780	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5783	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5784	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5787	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5790	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5791	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5794	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5795	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5797	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5799	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5800	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5809	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5811	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5812	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5813	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5815	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5816	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5818	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5821	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5823	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5825	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5827	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5829	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5830	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5831	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5832	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5834	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5836	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5837	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5838	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5839	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5840	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5841	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5842	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5843	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5844	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5845	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5846	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5847	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5848	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5849	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5850	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5851	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5852	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5853	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5854	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5855	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5856	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5857	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5858	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5859	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5860	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5861	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5862	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5863	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5864	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5865	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5866	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5867	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5868	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5869	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5870	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5871	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5872	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5873	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5874	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5875	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5876	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5877	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5878	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5879	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5880	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5881	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5882	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5883	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5887	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5889	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5891	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5893	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5894	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5895	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5896	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5897	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5902	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5907	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5911	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5912	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5915	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5918	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5922	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5926	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5927	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5930	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5937	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5938	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5941	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5944	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5945	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5948	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5953	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5957	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5961	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5964	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5965	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5968	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5969	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5970	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5972	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5973	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5974	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5975	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5977	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5979	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5980	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5981	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5983	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5984	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5985	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5987	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5990	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5991	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5994	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5995	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5997	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5999	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6001	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C6004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6030	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6032	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6033	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6036	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6038	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6040	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6042	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6043	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6044	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6045	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6046	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6047	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6048	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6049	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6050	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6051	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6052	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6053	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6054	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6055	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6056	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6057	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6058	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6059	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C6060	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6061	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6062	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6063	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6064	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6065	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C6066	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6067	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6068	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6069	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6070	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C6071	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C6072	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6073	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6074	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6075	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6076	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6077	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6078	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6079	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6080	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6081	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6082	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C6083	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C6084	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6085	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6087	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6089	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6091	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6093	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6095	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C6096	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C6097	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
CN803	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN804	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN1001	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN1801	1-770-627-21	s	PIN, CONNECTOR 10P
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D308	6-502-197-01	s	DI SML-D12M8WT86SM
D309	6-502-197-01	s	DI SML-D12M8WT86SM
D401	8-719-069-28	s	DI 1SS400FJTE61
D402	6-502-197-01	s	DI SML-D12M8WT86SM
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D404	8-719-069-28	s	DI 1SS400FJTE61
D405	6-502-197-01	s	DI SML-D12M8WT86SM
D406	8-719-069-28	s	DI 1SS400FJTE61
D407	6-502-197-01	s	DI SML-D12M8WT86SM
D408	8-719-069-28	s	DI 1SS400FJTE61
D501	6-502-598-01	s	DI SML-D12U8WT86
D701	6-502-598-01	s	DI SML-D12U8WT86

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D705	6-502-197-01	s	DI SML-D12M8WT86SM
D706	6-502-197-01	s	DI SML-D12M8WT86SM
D707	6-502-197-01	s	DI SML-D12M8WT86SM
D708	6-502-197-01	s	DI SML-D12M8WT86SM
D709	6-502-197-01	s	DI SML-D12M8WT86SM
D710	6-502-197-01	s	DI SML-D12M8WT86SM
D711	6-502-197-01	s	DI SML-D12M8WT86SM
D712	6-502-197-01	s	DI SML-D12M8WT86SM
D713	6-502-197-01	s	DI SML-D12M8WT86SM
D714	6-502-197-01	s	DI SML-D12M8WT86SM
D715	6-502-197-01	s	DI SML-D12M8WT86SM
D716	6-502-197-01	s	DI SML-D12M8WT86SM
D717	6-502-197-01	s	DI SML-D12M8WT86SM
D718	6-502-352-01	s	DI SML-522MU8WT86PQ
D719	6-502-352-01	s	DI SML-522MU8WT86PQ
D720	6-502-598-01	s	DI SML-D12U8WT86
D721	6-501-436-01	s	DIODE SML412BC6TT86
D901	6-502-197-01	s	DI SML-D12M8WT86SM
D902	6-502-197-01	s	DI SML-D12M8WT86SM
D903	6-502-197-01	s	DI SML-D12M8WT86SM
D904	6-502-197-01	s	DI SML-D12M8WT86SM
D1001	6-502-197-01	s	DI SML-D12M8WT86SM
D1002	6-502-197-01	s	DI SML-D12M8WT86SM
D1003	6-502-197-01	s	DI SML-D12M8WT86SM
D1501	6-502-598-01	s	DI SML-D12U8WT86
D1502	6-502-598-01	s	DI SML-D12U8WT86
D1503	6-502-598-01	s	DI SML-D12U8WT86
D1504	6-502-598-01	s	DI SML-D12U8WT86
D1505	6-502-598-01	s	DI SML-D12U8WT86
D1506	6-502-598-01	s	DI SML-D12U8WT86
D1507	6-502-598-01	s	DI SML-D12U8WT86
D1508	6-502-598-01	s	DI SML-D12U8WT86
D1509	6-502-598-01	s	DI SML-D12U8WT86
D1510	6-502-598-01	s	DI SML-D12U8WT86
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
DD207	1-487-092-11	s	DC-DC CONVERTER
DD208	1-487-092-11	s	DC-DC CONVERTER
DD209	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
E22	1-535-877-22	s	CHIP, CHECKER

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E23	1-535-877-22	s	CHIP, CHECKER
E24	1-535-877-22	s	CHIP, CHECKER
E25	1-535-877-22	s	CHIP, CHECKER
E26	1-535-877-22	s	CHIP, CHECKER
E27	1-535-877-22	s	CHIP, CHECKER
E28	1-535-877-22	s	CHIP, CHECKER
E29	1-535-877-22	s	CHIP, CHECKER
E30	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F207	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F208	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F209	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F210	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB804	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1002	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1003	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1004	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1005	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4702	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB4801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4802	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB4901	1-400-580-21	s	FERRITE, EMI (SMD)
FB4902	1-400-580-21	s	FERRITE, EMI (SMD)
FB4903	1-400-580-21	s	FERRITE, EMI (SMD)
FB5101	1-400-580-21	s	FERRITE, EMI (SMD)
FB5102	1-400-580-21	s	FERRITE, EMI (SMD)
FB5103	1-400-580-21	s	FERRITE, EMI (SMD)
FB5301	1-400-580-21	s	FERRITE, EMI (SMD)
FB5302	1-400-580-21	s	FERRITE, EMI (SMD)
FB5303	1-400-580-21	s	FERRITE, EMI (SMD)
FB5501	1-400-580-21	s	FERRITE, EMI (SMD)
FB5502	1-400-580-21	s	FERRITE, EMI (SMD)
FB5503	1-400-580-21	s	FERRITE, EMI (SMD)
FB5701	1-400-580-21	s	FERRITE, EMI (SMD)
FB5702	1-400-580-21	s	FERRITE, EMI (SMD)
FB5703	1-400-580-21	s	FERRITE, EMI (SMD)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB5901	1-400-580-21	s	FERRITE, EMI (SMD)
FB5902	1-400-580-21	s	FERRITE, EMI (SMD)
FB5903	1-400-580-21	s	FERRITE, EMI (SMD)
IC301	8-759-338-95	s	IC NJM2903V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC305	8-759-338-95	s	IC NJM2903V(TE2)
IC501	6-714-109-01	s	IC LMK03000CISQ
IC502	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC503	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC504	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC505	6-714-616-11	s	IC DS90LV110ATMTX
IC506	6-714-616-11	s	IC DS90LV110ATMTX
IC507	6-714-616-11	s	IC DS90LV110ATMTX
IC508	6-708-324-01	s	IC R3112N301A-TR-FA
IC509	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC512	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC701	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC803	6-705-514-01	s	IC MAX3222IPWR
IC901	6-710-018-01	s	IC CAT24C02WI-GT3
IC902	6-714-192-01	s	IC ADT75BRMZ-REEL
IC903	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC904	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC905	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC906	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC907	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1008	8-759-598-44	s	IC TC7WH08FK
IC1009	8-759-831-52	s	IC TC7WH125FK
IC1101	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1102	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1103	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1104	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1105	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1106	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1201	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1202	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1203	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1204	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1205	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1206	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1301	6-714-463-01	s	IC M29W256GL70N6E
IC1303	6-714-463-01	s	IC M29W256GL70N6E
IC1305	6-714-463-01	s	IC M29W256GL70N6E
IC1306	6-714-463-01	s	IC M29W256GL70N6E
IC1601	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1602	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1801	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1802	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1803	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1804	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC2202	8-759-388-62	s	IC NJU7062M(TE2)
IC2402	8-759-388-62	s	IC NJU7062M(TE2)
IC2602	8-759-388-62	s	IC NJU7062M(TE2)
IC2802	8-759-388-62	s	IC NJU7062M(TE2)
IC2902	8-759-388-62	s	IC NJU7062M(TE2)
IC3302	8-759-388-62	s	IC NJU7062M(TE2)
IC3502	8-759-388-62	s	IC NJU7062M(TE2)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC3702	8-759-388-62	s	IC NJU7062M(TE2)
IC3802	8-759-388-62	s	IC NJU7062M(TE2)
IC4202	8-759-388-62	s	IC NJU7062M(TE2)
IC4403	8-759-388-62	s	IC NJU7062M(TE2)
IC4601	6-708-563-01	s	IC CY7C1370DV25-167AXC
IC4901	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5001	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5301	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5501	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5701	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5901	6-706-224-01	s	IC ADM1032ARMZ-R7
L401	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L501	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4707	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4708	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4709	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4710	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4711	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4712	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4713	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4714	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4715	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4716	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4717	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4801	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4802	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4803	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4804	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4805	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4806	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4807	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4808	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4809	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4810	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4811	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4812	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4813	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4814	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4815	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4816	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4817	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L5101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5105	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5106	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5505	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5506	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5507	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5508	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5707	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5708	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q312	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q313	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q314	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q315	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q316	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q317	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q318	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-208-951-81	s	RES, CHIP 470K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-919-81	s	RES, CHIP 22K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-919-81	s	RES, CHIP 22K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-903-81	s	RES, CHIP 4.7K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-919-81	s	RES, CHIP 22K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-943-81	s	RES, CHIP 220K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R226	1-208-943-81	s	RES, CHIP 220K (1005)
R227	1-208-935-81	s	RES, CHIP 100K (1005)
R228	1-208-935-81	s	RES, CHIP 100K (1005)
R229	1-208-935-81	s	RES, CHIP 100K (1005)
R230	1-208-943-81	s	RES, CHIP 220K (1005)
R231	1-208-903-81	s	RES, CHIP 4.7K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R233	1-208-903-81	s	RES, CHIP 4.7K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R236	1-208-927-81	s	RES, CHIP 47K (1005)
R237	1-208-927-81	s	RES, CHIP 47K (1005)
R238	1-208-927-81	s	RES, CHIP 47K (1005)
R239	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-903-81	s	RES, CHIP 4.7K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-903-81	s	RES, CHIP 4.7K (1005)
R245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R247	1-208-935-81	s	RES, CHIP 100K (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-208-935-81	s	RES, CHIP 100K (1005)
R253	1-208-895-81	s	RES, CHIP 2.2K (1005)
R254	1-208-911-81	s	RES, CHIP 10K (1005)
R255	1-208-903-81	s	RES, CHIP 4.7K (1005)
R256	1-208-903-81	s	RES, CHIP 4.7K (1005)
R257	1-208-903-81	s	RES, CHIP 4.7K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-935-81	s	RES, CHIP 100K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-895-81	s	RES, CHIP 2.2K (1005)
R334	1-208-911-81	s	RES, CHIP 10K (1005)
R335	1-208-911-81	s	RES, CHIP 10K (1005)
R336	1-208-935-81	s	RES, CHIP 100K (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-903-81	s	RES, CHIP 4.7K (1005)
R339	1-208-895-81	s	RES, CHIP 2.2K (1005)
R340	1-208-903-81	s	RES, CHIP 4.7K (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R343	1-208-935-81	s	RES, CHIP 100K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R347	1-208-919-81	s	RES, CHIP 22K (1005)
R348	1-208-911-81	s	RES, CHIP 10K (1005)
R349	1-208-935-81	s	RES, CHIP 100K (1005)
R350	1-208-911-81	s	RES, CHIP 10K (1005)
R351	1-208-903-81	s	RES, CHIP 4.7K (1005)
R352	1-208-895-81	s	RES, CHIP 2.2K (1005)
R353	1-208-887-81	s	RES, CHIP 1.0K (1005)
R354	1-208-911-81	s	RES, CHIP 10K (1005)
R355	1-208-935-81	s	RES, CHIP 100K (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R357	1-208-903-81	s	RES, CHIP 4.7K (1005)
R358	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-911-81	s	RES, CHIP 10K (1005)
R403	1-208-887-81	s	RES, CHIP 1.0K (1005)
R404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R405	1-208-919-81	s	RES, CHIP 22K (1005)
R406	1-208-911-81	s	RES, CHIP 10K (1005)
R407	1-208-887-81	s	RES, CHIP 1.0K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R409	1-208-903-81	s	RES, CHIP 4.7K (1005)
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R416	1-208-903-81	s	RES, CHIP 4.7K (1005)
R417	1-208-903-81	s	RES, CHIP 4.7K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R419	1-208-887-81	s	RES, CHIP 1.0K (1005)
R420	1-208-887-81	s	RES, CHIP 1.0K (1005)
R421	1-208-887-81	s	RES, CHIP 1.0K (1005)
R422	1-208-911-81	s	RES, CHIP 10K (1005)
R423	1-208-887-81	s	RES, CHIP 1.0K (1005)
R424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R425	1-208-903-81	s	RES, CHIP 4.7K (1005)
R426	1-208-911-81	s	RES, CHIP 10K (1005)
R427	1-208-887-81	s	RES, CHIP 1.0K (1005)
R428	1-208-887-81	s	RES, CHIP 1.0K (1005)
R429	1-208-887-81	s	RES, CHIP 1.0K (1005)
R430	1-208-911-81	s	RES, CHIP 10K (1005)
R431	1-208-887-81	s	RES, CHIP 1.0K (1005)
R432	1-208-903-81	s	RES, CHIP 4.7K (1005)
R501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-208-863-81	s	RES, CHIP 100 (1005)
R507	1-208-927-81	s	RES, CHIP 47K (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R517	1-220-878-81	s	RES, CHIP 22 (1005)
R518	1-220-878-81	s	RES, CHIP 22 (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R520	1-220-878-81	s	RES, CHIP 22 (1005)
R521	1-220-878-81	s	RES, CHIP 22 (1005)
R522	1-220-878-81	s	RES, CHIP 22 (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-218-825-91	s	RES, CHIP 120 (1608)
R528	1-218-825-91	s	RES, CHIP 120 (1608)
R529	1-208-895-81	s	RES, CHIP 2.2K (1005)
R530	1-218-825-91	s	RES, CHIP 120 (1608)
R531	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-218-825-91	s	RES, CHIP 120 (1608)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R535	1-218-825-91	s	RES, CHIP 120 (1608)
R536	1-218-825-91	s	RES, CHIP 120 (1608)
R537	1-208-903-81	s	RES, CHIP 4.7K (1005)
R538	1-208-903-81	s	RES, CHIP 4.7K (1005)
R544	1-208-863-81	s	RES, CHIP 100 (1005)
R545	1-208-863-81	s	RES, CHIP 100 (1005)
R546	1-208-863-81	s	RES, CHIP 100 (1005)
R547	1-208-903-81	s	RES, CHIP 4.7K (1005)
R548	1-208-903-81	s	RES, CHIP 4.7K (1005)
R549	1-208-903-81	s	RES, CHIP 4.7K (1005)
R550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R565	1-208-887-81	s	RES, CHIP 1.0K (1005)
R567	1-208-887-81	s	RES, CHIP 1.0K (1005)
R568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R569	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R572	1-208-887-81	s	RES, CHIP 1.0K (1005)
R573	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R574	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R575	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R577	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R578	1-208-887-81	s	RES, CHIP 1.0K (1005)
R579	1-208-911-81	s	RES, CHIP 10K (1005)
R580	1-208-911-81	s	RES, CHIP 10K (1005)
R581	1-208-911-81	s	RES, CHIP 10K (1005)
R582	1-208-911-81	s	RES, CHIP 10K (1005)
R583	1-208-911-81	s	RES, CHIP 10K (1005)
R584	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-220-878-81	s	RES, CHIP 22 (1005)
R605	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R606	1-220-878-81	s	RES, CHIP 22 (1005)
R607	1-220-878-81	s	RES, CHIP 22 (1005)
R608	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-220-878-81	s	RES, CHIP 22 (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R614	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-220-878-81	s	RES, CHIP 22 (1005)
R616	1-220-878-81	s	RES, CHIP 22 (1005)
R617	1-220-878-81	s	RES, CHIP 22 (1005)
R618	1-220-878-81	s	RES, CHIP 22 (1005)
R619	1-208-863-81	s	RES, CHIP 100 (1005)
R620	1-208-863-81	s	RES, CHIP 100 (1005)
R621	1-208-863-81	s	RES, CHIP 100 (1005)
R622	1-208-863-81	s	RES, CHIP 100 (1005)
R623	1-208-863-81	s	RES, CHIP 100 (1005)
R624	1-208-863-81	s	RES, CHIP 100 (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R629	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-220-878-81	s	RES, CHIP 22 (1005)
R631	1-220-878-81	s	RES, CHIP 22 (1005)
R632	1-220-878-81	s	RES, CHIP 22 (1005)
R633	1-220-878-81	s	RES, CHIP 22 (1005)
R634	1-220-878-81	s	RES, CHIP 22 (1005)
R635	1-220-878-81	s	RES, CHIP 22 (1005)
R636	1-220-878-81	s	RES, CHIP 22 (1005)
R637	1-220-878-81	s	RES, CHIP 22 (1005)
R638	1-220-878-81	s	RES, CHIP 22 (1005)
R639	1-220-878-81	s	RES, CHIP 22 (1005)
R640	1-220-878-81	s	RES, CHIP 22 (1005)
R641	1-220-878-81	s	RES, CHIP 22 (1005)
R642	1-220-878-81	s	RES, CHIP 22 (1005)
R643	1-208-863-81	s	RES, CHIP 100 (1005)
R644	1-208-863-81	s	RES, CHIP 100 (1005)
R645	1-208-863-81	s	RES, CHIP 100 (1005)
R646	1-208-863-81	s	RES, CHIP 100 (1005)
R647	1-208-863-81	s	RES, CHIP 100 (1005)
R648	1-208-863-81	s	RES, CHIP 100 (1005)
R649	1-220-878-81	s	RES, CHIP 22 (1005)
R650	1-220-878-81	s	RES, CHIP 22 (1005)
R651	1-220-878-81	s	RES, CHIP 22 (1005)
R652	1-220-878-81	s	RES, CHIP 22 (1005)
R653	1-220-878-81	s	RES, CHIP 22 (1005)
R654	1-220-878-81	s	RES, CHIP 22 (1005)
R655	1-220-878-81	s	RES, CHIP 22 (1005)
R656	1-220-878-81	s	RES, CHIP 22 (1005)
R657	1-220-878-81	s	RES, CHIP 22 (1005)
R658	1-220-878-81	s	RES, CHIP 22 (1005)
R659	1-220-878-81	s	RES, CHIP 22 (1005)
R660	1-220-878-81	s	RES, CHIP 22 (1005)
R661	1-220-878-81	s	RES, CHIP 22 (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)
R703	1-220-878-81	s	RES, CHIP 22 (1005)
R706	1-220-878-81	s	RES, CHIP 22 (1005)
R707	1-220-878-81	s	RES, CHIP 22 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R709	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-220-878-81	s	RES, CHIP 22 (1005)
R712	1-220-878-81	s	RES, CHIP 22 (1005)
R713	1-220-878-81	s	RES, CHIP 22 (1005)
R714	1-220-878-81	s	RES, CHIP 22 (1005)
R715	1-220-878-81	s	RES, CHIP 22 (1005)
R716	1-220-878-81	s	RES, CHIP 22 (1005)
R717	1-220-878-81	s	RES, CHIP 22 (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R719	1-220-878-81	s	RES, CHIP 22 (1005)
R720	1-220-878-81	s	RES, CHIP 22 (1005)
R721	1-220-878-81	s	RES, CHIP 22 (1005)
R722	1-220-878-81	s	RES, CHIP 22 (1005)
R723	1-220-878-81	s	RES, CHIP 22 (1005)
R724	1-220-878-81	s	RES, CHIP 22 (1005)
R725	1-220-878-81	s	RES, CHIP 22 (1005)
R726	1-220-878-81	s	RES, CHIP 22 (1005)
R727	1-220-878-81	s	RES, CHIP 22 (1005)
R728	1-220-878-81	s	RES, CHIP 22 (1005)
R729	1-220-878-81	s	RES, CHIP 22 (1005)
R730	1-220-878-81	s	RES, CHIP 22 (1005)
R731	1-220-878-81	s	RES, CHIP 22 (1005)
R732	1-220-878-81	s	RES, CHIP 22 (1005)
R733	1-220-878-81	s	RES, CHIP 22 (1005)
R734	1-220-878-81	s	RES, CHIP 22 (1005)
R735	1-220-878-81	s	RES, CHIP 22 (1005)
R736	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R737	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R738	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R739	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R740	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R742	1-208-911-81	s	RES, CHIP 10K (1005)
R743	1-208-911-81	s	RES, CHIP 10K (1005)
R744	1-208-911-81	s	RES, CHIP 10K (1005)
R745	1-208-911-81	s	RES, CHIP 10K (1005)
R746	1-208-911-81	s	RES, CHIP 10K (1005)
R747	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-911-81	s	RES, CHIP 10K (1005)
R749	1-208-911-81	s	RES, CHIP 10K (1005)
R750	1-208-911-81	s	RES, CHIP 10K (1005)
R751	1-208-911-81	s	RES, CHIP 10K (1005)
R752	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-911-81	s	RES, CHIP 10K (1005)
R754	1-208-911-81	s	RES, CHIP 10K (1005)
R755	1-208-911-81	s	RES, CHIP 10K (1005)
R756	1-208-911-81	s	RES, CHIP 10K (1005)
R757	1-208-911-81	s	RES, CHIP 10K (1005)
R759	1-220-878-81	s	RES, CHIP 22 (1005)
R760	1-208-911-81	s	RES, CHIP 10K (1005)
R761	1-208-911-81	s	RES, CHIP 10K (1005)
R762	1-208-911-81	s	RES, CHIP 10K (1005)
R764	1-208-911-81	s	RES, CHIP 10K (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-911-81	s	RES, CHIP 10K (1005)
R767	1-208-911-81	s	RES, CHIP 10K (1005)
R768	1-208-911-81	s	RES, CHIP 10K (1005)
R769	1-208-911-81	s	RES, CHIP 10K (1005)
R771	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R772	1-208-911-81	s	RES, CHIP 10K (1005)
R773	1-208-911-81	s	RES, CHIP 10K (1005)
R774	1-208-911-81	s	RES, CHIP 10K (1005)
R775	1-208-903-81	s	RES, CHIP 4.7K (1005)
R778	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R779	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R781	1-208-903-81	s	RES, CHIP 4.7K (1005)
R784	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R785	1-220-878-81	s	RES, CHIP 22 (1005)
R786	1-220-878-81	s	RES, CHIP 22 (1005)
R787	1-220-878-81	s	RES, CHIP 22 (1005)
R788	1-220-878-81	s	RES, CHIP 22 (1005)
R789	1-220-878-81	s	RES, CHIP 22 (1005)
R790	1-220-878-81	s	RES, CHIP 22 (1005)
R791	1-220-878-81	s	RES, CHIP 22 (1005)
R792	1-220-878-81	s	RES, CHIP 22 (1005)
R793	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R795	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R797	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R800	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R801	1-208-935-81	s	RES, CHIP 100K (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-208-935-81	s	RES, CHIP 100K (1005)
R805	1-208-887-81	s	RES, CHIP 1.0K (1005)
R806	1-208-935-81	s	RES, CHIP 100K (1005)
R807	1-208-935-81	s	RES, CHIP 100K (1005)
R808	1-208-935-81	s	RES, CHIP 100K (1005)
R809	1-208-935-81	s	RES, CHIP 100K (1005)
R810	1-208-935-81	s	RES, CHIP 100K (1005)
R811	1-208-935-81	s	RES, CHIP 100K (1005)
R812	1-208-911-81	s	RES, CHIP 10K (1005)
R813	1-208-911-81	s	RES, CHIP 10K (1005)
R814	1-208-875-81	s	RES, CHIP 330 (1005)
R815	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-208-911-81	s	RES, CHIP 10K (1005)
R818	1-208-887-81	s	RES, CHIP 1.0K (1005)
R819	1-208-911-81	s	RES, CHIP 10K (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R838	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-911-81	s	RES, CHIP 10K (1005)
R840	1-208-911-81	s	RES, CHIP 10K (1005)
R841	1-208-887-81	s	RES, CHIP 1.0K (1005)
R842	1-208-871-81	s	RES, CHIP 220 (1005)
R843	1-208-871-81	s	RES, CHIP 220 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R844	1-208-887-81	s	RES, CHIP 1.0K (1005)
R845	1-208-871-81	s	RES, CHIP 220 (1005)
R846	1-208-887-81	s	RES, CHIP 1.0K (1005)
R847	1-208-911-81	s	RES, CHIP 10K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R849	1-220-878-81	s	RES, CHIP 22 (1005)
R850	1-220-878-81	s	RES, CHIP 22 (1005)
R851	1-220-878-81	s	RES, CHIP 22 (1005)
R852	1-220-878-81	s	RES, CHIP 22 (1005)
R853	1-208-935-81	s	RES, CHIP 100K (1005)
R854	1-208-935-81	s	RES, CHIP 100K (1005)
R855	1-208-935-81	s	RES, CHIP 100K (1005)
R856	1-208-935-81	s	RES, CHIP 100K (1005)
R857	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R858	1-220-878-81	s	RES, CHIP 22 (1005)
R859	1-220-878-81	s	RES, CHIP 22 (1005)
R860	1-220-878-81	s	RES, CHIP 22 (1005)
R861	1-220-878-81	s	RES, CHIP 22 (1005)
R862	1-220-878-81	s	RES, CHIP 22 (1005)
R863	1-220-878-81	s	RES, CHIP 22 (1005)
R864	1-220-878-81	s	RES, CHIP 22 (1005)
R865	1-220-878-81	s	RES, CHIP 22 (1005)
R866	1-220-878-81	s	RES, CHIP 22 (1005)
R867	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R869	1-220-878-81	s	RES, CHIP 22 (1005)
R870	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R871	1-220-878-81	s	RES, CHIP 22 (1005)
R872	1-220-878-81	s	RES, CHIP 22 (1005)
R873	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R902	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R903	1-208-895-81	s	RES, CHIP 2.2K (1005)
R904	1-208-895-81	s	RES, CHIP 2.2K (1005)
R905	1-208-895-81	s	RES, CHIP 2.2K (1005)
R906	1-208-895-81	s	RES, CHIP 2.2K (1005)
R907	1-208-935-81	s	RES, CHIP 100K (1005)
R908	1-208-855-81	s	RES, CHIP 47 (1005)
R909	1-208-855-81	s	RES, CHIP 47 (1005)
R910	1-208-855-81	s	RES, CHIP 47 (1005)
R911	1-208-855-81	s	RES, CHIP 47 (1005)
R912	1-208-855-81	s	RES, CHIP 47 (1005)
R913	1-208-855-81	s	RES, CHIP 47 (1005)
R914	1-208-855-81	s	RES, CHIP 47 (1005)
R915	1-208-855-81	s	RES, CHIP 47 (1005)
R916	1-208-855-81	s	RES, CHIP 47 (1005)
R917	1-208-855-81	s	RES, CHIP 47 (1005)
R918	1-208-855-81	s	RES, CHIP 47 (1005)
R919	1-208-855-81	s	RES, CHIP 47 (1005)
R920	1-208-855-81	s	RES, CHIP 47 (1005)
R921	1-208-855-81	s	RES, CHIP 47 (1005)
R922	1-208-855-81	s	RES, CHIP 47 (1005)
R923	1-208-855-81	s	RES, CHIP 47 (1005)
R924	1-208-935-81	s	RES, CHIP 100K (1005)
R925	1-208-911-81	s	RES, CHIP 10K (1005)
R927	1-208-911-81	s	RES, CHIP 10K (1005)
R930	1-208-911-81	s	RES, CHIP 10K (1005)
R932	1-208-911-81	s	RES, CHIP 10K (1005)
R934	1-208-911-81	s	RES, CHIP 10K (1005)
R936	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R937	1-208-860-81	s	RES, CHIP 75 (1005)
R938	1-208-860-81	s	RES, CHIP 75 (1005)
R939	1-208-860-81	s	RES, CHIP 75 (1005)
R940	1-208-860-81	s	RES, CHIP 75 (1005)
R941	1-208-860-81	s	RES, CHIP 75 (1005)
R942	1-208-860-81	s	RES, CHIP 75 (1005)
R943	1-208-860-81	s	RES, CHIP 75 (1005)
R944	1-208-860-81	s	RES, CHIP 75 (1005)
R945	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R946	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R947	1-208-879-81	s	RES, CHIP 470 (1005)
R948	1-220-878-81	s	RES, CHIP 22 (1005)
R949	1-220-878-81	s	RES, CHIP 22 (1005)
R950	1-220-878-81	s	RES, CHIP 22 (1005)
R951	1-220-878-81	s	RES, CHIP 22 (1005)
R952	1-220-878-81	s	RES, CHIP 22 (1005)
R953	1-220-878-81	s	RES, CHIP 22 (1005)
R954	1-220-878-81	s	RES, CHIP 22 (1005)
R955	1-220-878-81	s	RES, CHIP 22 (1005)
R956	1-220-878-81	s	RES, CHIP 22 (1005)
R957	1-220-878-81	s	RES, CHIP 22 (1005)
R958	1-220-878-81	s	RES, CHIP 22 (1005)
R959	1-220-878-81	s	RES, CHIP 22 (1005)
R960	1-220-878-81	s	RES, CHIP 22 (1005)
R961	1-220-878-81	s	RES, CHIP 22 (1005)
R962	1-220-878-81	s	RES, CHIP 22 (1005)
R963	1-220-878-81	s	RES, CHIP 22 (1005)
R964	1-220-878-81	s	RES, CHIP 22 (1005)
R965	1-220-878-81	s	RES, CHIP 22 (1005)
R966	1-220-878-81	s	RES, CHIP 22 (1005)
R967	1-220-878-81	s	RES, CHIP 22 (1005)
R968	1-220-878-81	s	RES, CHIP 22 (1005)
R969	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R970	1-220-878-81	s	RES, CHIP 22 (1005)
R971	1-220-878-81	s	RES, CHIP 22 (1005)
R972	1-220-878-81	s	RES, CHIP 22 (1005)
R973	1-220-878-81	s	RES, CHIP 22 (1005)
R974	1-220-878-81	s	RES, CHIP 22 (1005)
R975	1-220-878-81	s	RES, CHIP 22 (1005)
R976	1-220-878-81	s	RES, CHIP 22 (1005)
R977	1-220-878-81	s	RES, CHIP 22 (1005)
R978	1-220-878-81	s	RES, CHIP 22 (1005)
R979	1-220-878-81	s	RES, CHIP 22 (1005)
R980	1-220-878-81	s	RES, CHIP 22 (1005)
R986	1-220-878-81	s	RES, CHIP 22 (1005)
R987	1-220-878-81	s	RES, CHIP 22 (1005)
R988	1-220-878-81	s	RES, CHIP 22 (1005)
R989	1-220-878-81	s	RES, CHIP 22 (1005)
R990	1-220-878-81	s	RES, CHIP 22 (1005)
R991	1-220-878-81	s	RES, CHIP 22 (1005)
R992	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1002	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1003	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1004	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1005	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1006	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1007	1-208-911-81	s	RES, CHIP 10K (1005)
R1008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1014	1-208-856-81	s	RES, CHIP 51 (1005)
R1015	1-208-856-81	s	RES, CHIP 51 (1005)
R1016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1023	1-208-911-81	s	RES, CHIP 10K (1005)
R1024	1-208-959-81	s	RES, CHIP 1M (1005)
R1025	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1026	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1027	1-208-879-81	s	RES, CHIP 470 (1005)
R1028	1-208-879-81	s	RES, CHIP 470 (1005)
R1029	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1030	1-208-879-81	s	RES, CHIP 470 (1005)
R1031	1-208-856-81	s	RES, CHIP 51 (1005)
R1032	1-208-856-81	s	RES, CHIP 51 (1005)
R1033	1-208-856-81	s	RES, CHIP 51 (1005)
R1034	1-208-856-81	s	RES, CHIP 51 (1005)
R1035	1-208-856-81	s	RES, CHIP 51 (1005)
R1036	1-208-856-81	s	RES, CHIP 51 (1005)
R1037	1-208-856-81	s	RES, CHIP 51 (1005)
R1038	1-208-856-81	s	RES, CHIP 51 (1005)
R1039	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1040	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1041	1-208-911-81	s	RES, CHIP 10K (1005)
R1042	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-911-81	s	RES, CHIP 10K (1005)
R1302	1-208-911-81	s	RES, CHIP 10K (1005)
R1304	1-208-911-81	s	RES, CHIP 10K (1005)
R1306	1-208-911-81	s	RES, CHIP 10K (1005)
R1307	1-208-911-81	s	RES, CHIP 10K (1005)
R1309	1-208-911-81	s	RES, CHIP 10K (1005)
R1310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1316	1-208-911-81	s	RES, CHIP 10K (1005)
R1317	1-208-911-81	s	RES, CHIP 10K (1005)
R1319	1-208-911-81	s	RES, CHIP 10K (1005)
R1321	1-208-911-81	s	RES, CHIP 10K (1005)
R1322	1-208-911-81	s	RES, CHIP 10K (1005)
R1324	1-208-911-81	s	RES, CHIP 10K (1005)
R1326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1330	1-208-911-81	s	RES, CHIP 10K (1005)
R1331	1-208-911-81	s	RES, CHIP 10K (1005)
R1333	1-208-911-81	s	RES, CHIP 10K (1005)
R1336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1338	1-208-911-81	s	RES, CHIP 10K (1005)
R1339	1-208-911-81	s	RES, CHIP 10K (1005)
R1341	1-208-911-81	s	RES, CHIP 10K (1005)
R1343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1504	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1505	1-220-878-81	s	RES, CHIP 22 (1005)
R1506	1-220-878-81	s	RES, CHIP 22 (1005)
R1507	1-220-878-81	s	RES, CHIP 22 (1005)
R1508	1-220-878-81	s	RES, CHIP 22 (1005)
R1509	1-220-878-81	s	RES, CHIP 22 (1005)
R1510	1-208-911-81	s	RES, CHIP 10K (1005)
R1511	1-208-911-81	s	RES, CHIP 10K (1005)
R1512	1-208-911-81	s	RES, CHIP 10K (1005)
R1513	1-208-911-81	s	RES, CHIP 10K (1005)
R1514	1-208-911-81	s	RES, CHIP 10K (1005)
R1515	1-208-911-81	s	RES, CHIP 10K (1005)
R1516	1-208-911-81	s	RES, CHIP 10K (1005)
R1517	1-208-911-81	s	RES, CHIP 10K (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1521	1-208-911-81	s	RES, CHIP 10K (1005)
R1522	1-208-911-81	s	RES, CHIP 10K (1005)
R1523	1-208-911-81	s	RES, CHIP 10K (1005)
R1524	1-208-911-81	s	RES, CHIP 10K (1005)
R1525	1-208-911-81	s	RES, CHIP 10K (1005)
R1526	1-208-911-81	s	RES, CHIP 10K (1005)
R1527	1-208-911-81	s	RES, CHIP 10K (1005)
R1528	1-208-911-81	s	RES, CHIP 10K (1005)
R1529	1-208-911-81	s	RES, CHIP 10K (1005)
R1530	1-208-911-81	s	RES, CHIP 10K (1005)
R1531	1-208-911-81	s	RES, CHIP 10K (1005)
R1532	1-208-911-81	s	RES, CHIP 10K (1005)
R1533	1-208-911-81	s	RES, CHIP 10K (1005)
R1534	1-208-911-81	s	RES, CHIP 10K (1005)
R1535	1-208-911-81	s	RES, CHIP 10K (1005)
R1536	1-208-911-81	s	RES, CHIP 10K (1005)
R1537	1-208-911-81	s	RES, CHIP 10K (1005)
R1538	1-208-911-81	s	RES, CHIP 10K (1005)
R1539	1-208-911-81	s	RES, CHIP 10K (1005)
R1540	1-208-911-81	s	RES, CHIP 10K (1005)
R1541	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1542	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1543	1-208-879-81	s	RES, CHIP 470 (1005)
R1544	1-208-879-81	s	RES, CHIP 470 (1005)
R1545	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1548	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1549	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1552	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1553	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1557	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1559	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1564	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1565	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1567	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1570	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1571	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1572	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1573	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1574	1-208-911-81	s	RES, CHIP 10K (1005)
R1575	1-208-911-81	s	RES, CHIP 10K (1005)
R1576	1-208-911-81	s	RES, CHIP 10K (1005)
R1577	1-208-911-81	s	RES, CHIP 10K (1005)
R1578	1-208-911-81	s	RES, CHIP 10K (1005)
R1579	1-208-911-81	s	RES, CHIP 10K (1005)
R1581	1-208-911-81	s	RES, CHIP 10K (1005)
R1583	1-208-911-81	s	RES, CHIP 10K (1005)
R1584	1-208-875-81	s	RES, CHIP 330 (1005)
R1585	1-208-911-81	s	RES, CHIP 10K (1005)
R1586	1-208-911-81	s	RES, CHIP 10K (1005)
R1587	1-208-911-81	s	RES, CHIP 10K (1005)
R1588	1-208-911-81	s	RES, CHIP 10K (1005)
R1589	1-208-911-81	s	RES, CHIP 10K (1005)
R1590	1-208-911-81	s	RES, CHIP 10K (1005)
R1591	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1592	1-208-911-81	s	RES, CHIP 10K (1005)
R1593	1-208-911-81	s	RES, CHIP 10K (1005)
R1594	1-208-911-81	s	RES, CHIP 10K (1005)
R1597	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1598	1-220-878-81	s	RES, CHIP 22 (1005)
R1599	1-220-878-81	s	RES, CHIP 22 (1005)
R1600	1-220-878-81	s	RES, CHIP 22 (1005)
R1601	1-220-878-81	s	RES, CHIP 22 (1005)
R1602	1-220-878-81	s	RES, CHIP 22 (1005)
R1603	1-220-878-81	s	RES, CHIP 22 (1005)
R1604	1-220-878-81	s	RES, CHIP 22 (1005)
R1605	1-220-878-81	s	RES, CHIP 22 (1005)
R1606	1-220-878-81	s	RES, CHIP 22 (1005)
R1607	1-220-878-81	s	RES, CHIP 22 (1005)
R1608	1-220-878-81	s	RES, CHIP 22 (1005)
R1609	1-220-878-81	s	RES, CHIP 22 (1005)
R1610	1-220-878-81	s	RES, CHIP 22 (1005)
R1611	1-220-878-81	s	RES, CHIP 22 (1005)
R1612	1-220-878-81	s	RES, CHIP 22 (1005)
R1613	1-220-878-81	s	RES, CHIP 22 (1005)
R1614	1-220-878-81	s	RES, CHIP 22 (1005)
R1615	1-220-878-81	s	RES, CHIP 22 (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1619	1-208-911-81	s	RES, CHIP 10K (1005)
R1620	1-208-911-81	s	RES, CHIP 10K (1005)
R1621	1-208-911-81	s	RES, CHIP 10K (1005)
R1622	1-208-911-81	s	RES, CHIP 10K (1005)
R1623	1-208-911-81	s	RES, CHIP 10K (1005)
R1624	1-208-911-81	s	RES, CHIP 10K (1005)
R1625	1-208-911-81	s	RES, CHIP 10K (1005)
R1626	1-208-911-81	s	RES, CHIP 10K (1005)
R1627	1-208-911-81	s	RES, CHIP 10K (1005)
R1628	1-208-911-81	s	RES, CHIP 10K (1005)
R1629	1-208-911-81	s	RES, CHIP 10K (1005)
R1630	1-208-927-81	s	RES, CHIP 47K (1005)
R1631	1-208-911-81	s	RES, CHIP 10K (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1634	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1635	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1636	1-208-887-81	s	RES, CHIP 1.0K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1637	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1638	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1639	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1640	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1641	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1642	1-208-911-81	s	RES, CHIP 10K (1005)
R1643	1-208-911-81	s	RES, CHIP 10K (1005)
R1644	1-208-911-81	s	RES, CHIP 10K (1005)
R1645	1-208-911-81	s	RES, CHIP 10K (1005)
R1646	1-208-911-81	s	RES, CHIP 10K (1005)
R1647	1-208-911-81	s	RES, CHIP 10K (1005)
R1648	1-208-911-81	s	RES, CHIP 10K (1005)
R1650	1-208-911-81	s	RES, CHIP 10K (1005)
R1651	1-208-911-81	s	RES, CHIP 10K (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1655	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1661	1-220-878-81	s	RES, CHIP 22 (1005)
R1662	1-220-878-81	s	RES, CHIP 22 (1005)
R1663	1-220-878-81	s	RES, CHIP 22 (1005)
R1664	1-220-878-81	s	RES, CHIP 22 (1005)
R1665	1-220-878-81	s	RES, CHIP 22 (1005)
R1666	1-220-878-81	s	RES, CHIP 22 (1005)
R1667	1-220-878-81	s	RES, CHIP 22 (1005)
R1668	1-220-878-81	s	RES, CHIP 22 (1005)
R1669	1-220-878-81	s	RES, CHIP 22 (1005)
R1670	1-220-878-81	s	RES, CHIP 22 (1005)
R1671	1-220-878-81	s	RES, CHIP 22 (1005)
R1672	1-220-878-81	s	RES, CHIP 22 (1005)
R1673	1-220-878-81	s	RES, CHIP 22 (1005)
R1674	1-220-878-81	s	RES, CHIP 22 (1005)
R1675	1-220-878-81	s	RES, CHIP 22 (1005)
R1676	1-220-878-81	s	RES, CHIP 22 (1005)
R1677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1678	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1679	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1680	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1681	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1683	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1684	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1687	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1688	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1689	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1690	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1691	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1692	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1694	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1695	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1696	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1698	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1699	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1700	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1710	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1714	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1715	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1718	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1719	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1735	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1752	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1754	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1757	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1761	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1763	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1765	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1767	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1768	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1769	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1770	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1805	1-208-855-81	s	RES, CHIP 47 (1005)
R1806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1807	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1808	1-208-855-81	s	RES, CHIP 47 (1005)
R1809	1-208-855-81	s	RES, CHIP 47 (1005)
R1810	1-208-855-81	s	RES, CHIP 47 (1005)
R1811	1-208-855-81	s	RES, CHIP 47 (1005)
R1812	1-208-855-81	s	RES, CHIP 47 (1005)
R1813	1-208-855-81	s	RES, CHIP 47 (1005)
R1814	1-208-855-81	s	RES, CHIP 47 (1005)
R1815	1-208-855-81	s	RES, CHIP 47 (1005)
R1816	1-208-855-81	s	RES, CHIP 47 (1005)
R1817	1-208-855-81	s	RES, CHIP 47 (1005)
R1818	1-208-855-81	s	RES, CHIP 47 (1005)
R1819	1-208-855-81	s	RES, CHIP 47 (1005)
R1820	1-208-855-81	s	RES, CHIP 47 (1005)
R1821	1-208-855-81	s	RES, CHIP 47 (1005)
R1822	1-208-855-81	s	RES, CHIP 47 (1005)
R1823	1-208-855-81	s	RES, CHIP 47 (1005)
R1824	1-208-855-81	s	RES, CHIP 47 (1005)
R1825	1-208-855-81	s	RES, CHIP 47 (1005)
R1826	1-208-855-81	s	RES, CHIP 47 (1005)
R1827	1-208-855-81	s	RES, CHIP 47 (1005)
R1828	1-208-855-81	s	RES, CHIP 47 (1005)
R1829	1-208-855-81	s	RES, CHIP 47 (1005)
R1830	1-208-855-81	s	RES, CHIP 47 (1005)
R1831	1-208-855-81	s	RES, CHIP 47 (1005)
R1832	1-208-855-81	s	RES, CHIP 47 (1005)
R1833	1-208-855-81	s	RES, CHIP 47 (1005)
R1834	1-208-855-81	s	RES, CHIP 47 (1005)
R1835	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1836	1-208-855-81	s	RES, CHIP 47 (1005)
R1837	1-208-855-81	s	RES, CHIP 47 (1005)
R1838	1-208-855-81	s	RES, CHIP 47 (1005)
R1842	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1843	1-208-855-81	s	RES, CHIP 47 (1005)
R1844	1-208-855-81	s	RES, CHIP 47 (1005)
R1846	1-208-855-81	s	RES, CHIP 47 (1005)
R1847	1-208-855-81	s	RES, CHIP 47 (1005)
R1848	1-208-855-81	s	RES, CHIP 47 (1005)
R1851	1-208-855-81	s	RES, CHIP 47 (1005)
R1852	1-208-855-81	s	RES, CHIP 47 (1005)
R1853	1-208-855-81	s	RES, CHIP 47 (1005)
R1854	1-208-855-81	s	RES, CHIP 47 (1005)
R1855	1-208-855-81	s	RES, CHIP 47 (1005)
R1856	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-863-81	s	RES, CHIP 100 (1005)
R1902	1-208-863-81	s	RES, CHIP 100 (1005)
R2001	1-208-863-81	s	RES, CHIP 100 (1005)
R2002	1-208-863-81	s	RES, CHIP 100 (1005)
R2003	1-208-863-81	s	RES, CHIP 100 (1005)
R2004	1-208-863-81	s	RES, CHIP 100 (1005)
R2005	1-208-863-81	s	RES, CHIP 100 (1005)
R2006	1-208-863-81	s	RES, CHIP 100 (1005)
R2007	1-208-863-81	s	RES, CHIP 100 (1005)
R2008	1-208-863-81	s	RES, CHIP 100 (1005)
R2101	1-208-863-81	s	RES, CHIP 100 (1005)
R2102	1-208-863-81	s	RES, CHIP 100 (1005)
R2103	1-208-863-81	s	RES, CHIP 100 (1005)
R2104	1-208-863-81	s	RES, CHIP 100 (1005)
R2105	1-208-863-81	s	RES, CHIP 100 (1005)
R2106	1-208-863-81	s	RES, CHIP 100 (1005)
R2107	1-208-863-81	s	RES, CHIP 100 (1005)
R2201	1-208-863-81	s	RES, CHIP 100 (1005)
R2202	1-208-911-81	s	RES, CHIP 10K (1005)
R2203	1-208-911-81	s	RES, CHIP 10K (1005)
R2204	1-208-855-81	s	RES, CHIP 47 (1005)
R2205	1-208-855-81	s	RES, CHIP 47 (1005)
R2301	1-208-863-81	s	RES, CHIP 100 (1005)
R2303	1-208-863-81	s	RES, CHIP 100 (1005)
R2401	1-208-863-81	s	RES, CHIP 100 (1005)
R2403	1-208-911-81	s	RES, CHIP 10K (1005)
R2404	1-208-911-81	s	RES, CHIP 10K (1005)
R2405	1-208-863-81	s	RES, CHIP 100 (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2501	1-208-863-81	s	RES, CHIP 100 (1005)
R2503	1-208-863-81	s	RES, CHIP 100 (1005)
R2601	1-208-863-81	s	RES, CHIP 100 (1005)
R2603	1-208-911-81	s	RES, CHIP 10K (1005)
R2604	1-208-911-81	s	RES, CHIP 10K (1005)
R2605	1-208-863-81	s	RES, CHIP 100 (1005)
R2606	1-208-855-81	s	RES, CHIP 47 (1005)
R2607	1-208-855-81	s	RES, CHIP 47 (1005)
R2701	1-208-863-81	s	RES, CHIP 100 (1005)
R2703	1-208-863-81	s	RES, CHIP 100 (1005)
R2801	1-208-863-81	s	RES, CHIP 100 (1005)
R2802	1-208-911-81	s	RES, CHIP 10K (1005)
R2803	1-208-911-81	s	RES, CHIP 10K (1005)
R2804	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2805	1-208-855-81	s	RES, CHIP 47 (1005)
R2901	1-208-863-81	s	RES, CHIP 100 (1005)
R2903	1-208-911-81	s	RES, CHIP 10K (1005)
R2904	1-208-911-81	s	RES, CHIP 10K (1005)
R2905	1-208-863-81	s	RES, CHIP 100 (1005)
R2906	1-208-855-81	s	RES, CHIP 47 (1005)
R2907	1-208-855-81	s	RES, CHIP 47 (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3003	1-208-863-81	s	RES, CHIP 100 (1005)
R3101	1-208-863-81	s	RES, CHIP 100 (1005)
R3103	1-208-863-81	s	RES, CHIP 100 (1005)
R3201	1-208-863-81	s	RES, CHIP 100 (1005)
R3202	1-208-911-81	s	RES, CHIP 10K (1005)
R3203	1-208-911-81	s	RES, CHIP 10K (1005)
R3204	1-208-911-81	s	RES, CHIP 10K (1005)
R3301	1-208-863-81	s	RES, CHIP 100 (1005)
R3303	1-208-911-81	s	RES, CHIP 10K (1005)
R3304	1-208-911-81	s	RES, CHIP 10K (1005)
R3305	1-208-863-81	s	RES, CHIP 100 (1005)
R3306	1-208-855-81	s	RES, CHIP 47 (1005)
R3307	1-208-855-81	s	RES, CHIP 47 (1005)
R3401	1-208-863-81	s	RES, CHIP 100 (1005)
R3403	1-208-863-81	s	RES, CHIP 100 (1005)
R3501	1-208-863-81	s	RES, CHIP 100 (1005)
R3503	1-208-911-81	s	RES, CHIP 10K (1005)
R3504	1-208-911-81	s	RES, CHIP 10K (1005)
R3505	1-208-863-81	s	RES, CHIP 100 (1005)
R3506	1-208-855-81	s	RES, CHIP 47 (1005)
R3507	1-208-855-81	s	RES, CHIP 47 (1005)
R3601	1-208-863-81	s	RES, CHIP 100 (1005)
R3603	1-208-863-81	s	RES, CHIP 100 (1005)
R3701	1-208-863-81	s	RES, CHIP 100 (1005)
R3702	1-208-911-81	s	RES, CHIP 10K (1005)
R3703	1-208-911-81	s	RES, CHIP 10K (1005)
R3704	1-208-855-81	s	RES, CHIP 47 (1005)
R3705	1-208-855-81	s	RES, CHIP 47 (1005)
R3801	1-208-863-81	s	RES, CHIP 100 (1005)
R3803	1-208-911-81	s	RES, CHIP 10K (1005)
R3804	1-208-911-81	s	RES, CHIP 10K (1005)
R3805	1-208-863-81	s	RES, CHIP 100 (1005)
R3806	1-208-855-81	s	RES, CHIP 47 (1005)
R3807	1-208-855-81	s	RES, CHIP 47 (1005)
R3901	1-208-863-81	s	RES, CHIP 100 (1005)
R3903	1-208-863-81	s	RES, CHIP 100 (1005)
R4001	1-208-863-81	s	RES, CHIP 100 (1005)
R4003	1-208-863-81	s	RES, CHIP 100 (1005)
R4101	1-208-863-81	s	RES, CHIP 100 (1005)
R4102	1-208-911-81	s	RES, CHIP 10K (1005)
R4103	1-208-911-81	s	RES, CHIP 10K (1005)
R4104	1-208-911-81	s	RES, CHIP 10K (1005)
R4201	1-208-863-81	s	RES, CHIP 100 (1005)
R4203	1-208-911-81	s	RES, CHIP 10K (1005)
R4204	1-208-911-81	s	RES, CHIP 10K (1005)
R4205	1-208-863-81	s	RES, CHIP 100 (1005)
R4206	1-208-855-81	s	RES, CHIP 47 (1005)
R4207	1-208-855-81	s	RES, CHIP 47 (1005)
R4301	1-208-863-81	s	RES, CHIP 100 (1005)
R4303	1-208-863-81	s	RES, CHIP 100 (1005)
R4405	1-208-863-81	s	RES, CHIP 100 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4410	1-208-863-81	s	RES, CHIP 100 (1005)
R4411	1-208-911-81	s	RES, CHIP 10K (1005)
R4412	1-208-911-81	s	RES, CHIP 10K (1005)
R4413	1-208-855-81	s	RES, CHIP 47 (1005)
R4414	1-208-855-81	s	RES, CHIP 47 (1005)
R4505	1-208-863-81	s	RES, CHIP 100 (1005)
R4510	1-208-863-81	s	RES, CHIP 100 (1005)
R4601	1-220-878-81	s	RES, CHIP 22 (1005)
R4602	1-208-911-81	s	RES, CHIP 10K (1005)
R4701	1-208-911-81	s	RES, CHIP 10K (1005)
R4702	1-208-911-81	s	RES, CHIP 10K (1005)
R4703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4704	1-208-911-81	s	RES, CHIP 10K (1005)
R4705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4706	1-208-911-81	s	RES, CHIP 10K (1005)
R4707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4708	1-208-911-81	s	RES, CHIP 10K (1005)
R4709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4714	1-208-863-81	s	RES, CHIP 100 (1005)
R4715	1-208-863-81	s	RES, CHIP 100 (1005)
R4716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4717	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4718	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4719	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4801	1-208-911-81	s	RES, CHIP 10K (1005)
R4802	1-208-911-81	s	RES, CHIP 10K (1005)
R4804	1-208-911-81	s	RES, CHIP 10K (1005)
R4805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4806	1-208-911-81	s	RES, CHIP 10K (1005)
R4807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4808	1-208-911-81	s	RES, CHIP 10K (1005)
R4809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4814	1-208-863-81	s	RES, CHIP 100 (1005)
R4815	1-208-863-81	s	RES, CHIP 100 (1005)
R4816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4901	1-208-911-81	s	RES, CHIP 10K (1005)
R4902	1-208-911-81	s	RES, CHIP 10K (1005)
R4903	1-208-855-81	s	RES, CHIP 47 (1005)
R4904	1-208-855-81	s	RES, CHIP 47 (1005)
R4905	1-208-855-81	s	RES, CHIP 47 (1005)
R4906	1-208-855-81	s	RES, CHIP 47 (1005)
R4909	1-208-855-81	s	RES, CHIP 47 (1005)
R4910	1-208-855-81	s	RES, CHIP 47 (1005)
R4911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4912	1-208-855-81	s	RES, CHIP 47 (1005)
R4913	1-208-855-81	s	RES, CHIP 47 (1005)
R5101	1-208-911-81	s	RES, CHIP 10K (1005)
R5102	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5103	1-208-855-81	s	RES, CHIP 47 (1005)
R5104	1-208-855-81	s	RES, CHIP 47 (1005)
R5105	1-208-855-81	s	RES, CHIP 47 (1005)
R5106	1-208-855-81	s	RES, CHIP 47 (1005)
R5107	1-208-855-81	s	RES, CHIP 47 (1005)
R5108	1-208-855-81	s	RES, CHIP 47 (1005)
R5109	1-208-855-81	s	RES, CHIP 47 (1005)
R5110	1-208-855-81	s	RES, CHIP 47 (1005)
R5111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5112	1-208-855-81	s	RES, CHIP 47 (1005)
R5113	1-208-855-81	s	RES, CHIP 47 (1005)
R5301	1-208-911-81	s	RES, CHIP 10K (1005)
R5302	1-208-911-81	s	RES, CHIP 10K (1005)
R5303	1-208-855-81	s	RES, CHIP 47 (1005)
R5304	1-208-855-81	s	RES, CHIP 47 (1005)
R5305	1-208-855-81	s	RES, CHIP 47 (1005)
R5306	1-208-855-81	s	RES, CHIP 47 (1005)
R5307	1-208-855-81	s	RES, CHIP 47 (1005)
R5308	1-208-855-81	s	RES, CHIP 47 (1005)
R5309	1-208-855-81	s	RES, CHIP 47 (1005)
R5310	1-208-855-81	s	RES, CHIP 47 (1005)
R5311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5312	1-208-855-81	s	RES, CHIP 47 (1005)
R5313	1-208-855-81	s	RES, CHIP 47 (1005)
R5501	1-208-911-81	s	RES, CHIP 10K (1005)
R5502	1-208-911-81	s	RES, CHIP 10K (1005)
R5505	1-208-855-81	s	RES, CHIP 47 (1005)
R5506	1-208-855-81	s	RES, CHIP 47 (1005)
R5507	1-208-855-81	s	RES, CHIP 47 (1005)
R5508	1-208-855-81	s	RES, CHIP 47 (1005)
R5509	1-208-855-81	s	RES, CHIP 47 (1005)
R5510	1-208-855-81	s	RES, CHIP 47 (1005)
R5511	1-208-855-81	s	RES, CHIP 47 (1005)
R5512	1-208-855-81	s	RES, CHIP 47 (1005)
R5513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5514	1-208-855-81	s	RES, CHIP 47 (1005)
R5515	1-208-855-81	s	RES, CHIP 47 (1005)
R5701	1-208-911-81	s	RES, CHIP 10K (1005)
R5702	1-208-911-81	s	RES, CHIP 10K (1005)
R5705	1-208-855-81	s	RES, CHIP 47 (1005)
R5706	1-208-855-81	s	RES, CHIP 47 (1005)
R5707	1-208-855-81	s	RES, CHIP 47 (1005)
R5708	1-208-855-81	s	RES, CHIP 47 (1005)
R5709	1-208-855-81	s	RES, CHIP 47 (1005)
R5710	1-208-855-81	s	RES, CHIP 47 (1005)
R5711	1-208-855-81	s	RES, CHIP 47 (1005)
R5712	1-208-855-81	s	RES, CHIP 47 (1005)
R5713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5714	1-208-855-81	s	RES, CHIP 47 (1005)
R5715	1-208-855-81	s	RES, CHIP 47 (1005)
R5901	1-208-911-81	s	RES, CHIP 10K (1005)
R5902	1-208-911-81	s	RES, CHIP 10K (1005)
R5903	1-208-855-81	s	RES, CHIP 47 (1005)
R5904	1-208-855-81	s	RES, CHIP 47 (1005)
R5905	1-208-855-81	s	RES, CHIP 47 (1005)
R5906	1-208-855-81	s	RES, CHIP 47 (1005)
R5907	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5908	1-208-855-81	s	RES, CHIP 47 (1005)
R5909	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB701	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB702	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB703	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB704	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB705	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB706	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB801	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB802	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB803	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB804	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB805	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB806	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB807	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB808	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB813	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB814	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB815	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB816	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB817	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB818	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB819	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB820	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB821	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB822	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB823	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB824	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB825	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB826	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB827	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB828	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB829	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB830	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB831	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB832	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB833	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB834	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1112	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1113	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1114	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1115	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1116	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1117	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1119	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1120	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1121	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1122	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1123	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1124	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1125	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1126	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1203	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1204	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1205	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1206	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1207	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1208	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1209	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1210	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1211	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1212	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1213	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1214	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1215	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1216	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1217	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1218	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1219	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1220	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1221	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1222	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1223	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1224	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB4601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
S701	1-692-271-41	s	SWITCH, SLIDE
S801	1-771-721-21	s	SWITCH, TACTILE
T901	1-443-851-21	s	GIGABIT MAGNETIC MODULE
T902	1-443-851-21	s	GIGABIT MAGNETIC MODULE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP210	1-535-877-22	s	CHIP, CHECKER

(DVP-53 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP211	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP404	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
TP602	1-535-877-22	s	CHIP, CHECKER
TP603	1-535-877-22	s	CHIP, CHECKER
TP604	1-535-877-22	s	CHIP, CHECKER
TP605	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
X501	1-813-488-11	s	OSCILLATOR, CRYSTAL
X1001	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)

FC-112 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
12pcs	4-143-557-01	s	SPRING, COMPRESSION
12pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
6pcs	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	7-626-320-61	s	PIN, SPRING 3X18
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C228	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C229	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C230	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C231	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C232	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C233	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C234	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C235	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C236	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C237	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C238	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C239	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C240	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C243	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C244	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C245	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C246	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C247	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C248	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C249	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C250	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C251	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C252	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C253	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C254	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C255	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C256	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C257	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C258	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C259	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C260	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C261	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C262	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C263	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C264	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C265	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C301	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C302	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C303	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C304	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C404	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C413	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C414	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C415	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C416	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C417	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C418	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C419	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C420	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C422	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C423	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C424	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C425	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C428	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C433	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C434	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C435	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C436	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C437	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C438	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C439	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C440	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C441	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C442	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C443	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C444	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C445	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C446	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C447	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C448	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C453	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C454	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C455	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C456	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C457	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C458	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C459	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C460	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C461	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C462	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C463	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C464	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C468	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C469	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C470	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C471	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C472	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C473	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C474	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C475	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C476	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C477	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C478	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C479	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C480	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C507	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C508	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C518	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C519	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C520	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C523	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C524	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C527	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C528	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C531	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C532	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C535	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C536	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C539	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C540	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C543	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C544	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C547	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C548	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C551	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C552	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C553	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C554	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C568	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C569	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C571	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C573	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C574	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C575	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C576	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C577	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C728	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C737	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C738	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C743	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C813	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C814	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C815	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C816	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C817	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C818	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C819	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C839	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C918	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C920	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C922	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C924	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1101	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1102	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1105	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1106	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1107	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1108	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1109	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1110	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1111	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1112	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1119	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1121	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1122	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1123	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1124	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1125	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1126	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1127	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1128	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1129	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1130	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1131	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1132	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1504	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1506	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1510	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1513	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1519	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1525	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1526	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1527	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1532	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1537	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1542	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1547	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1557	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1561	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1568	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1569	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1570	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1571	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1572	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1573	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1574	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1575	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1577	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1578	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1579	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1580	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1581	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1582	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1583	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1584	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1585	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1586	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1587	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1588	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1589	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1590	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1591	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1592	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1593	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1594	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1595	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1596	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1597	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1598	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1599	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1652	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1700	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1704	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1706	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1710	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1713	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1719	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1725	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1726	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1727	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1728	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1732	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1737	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1738	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1740	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1742	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1743	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1747	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1748	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1749	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1752	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1757	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1760	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1761	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1763	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1765	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1766	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1768	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1769	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1770	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1771	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1772	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1773	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1774	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1777	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1778	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1779	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1780	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1781	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1782	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1783	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1784	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1785	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1786	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1787	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1788	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1789	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1790	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1791	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1792	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1793	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1794	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1795	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1796	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1797	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1798	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1799	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1900	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1904	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1906	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1910	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1913	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1918	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1919	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1920	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1922	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1924	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1925	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1926	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1927	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1928	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1930	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1932	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1934	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1935	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1937	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1940	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1942	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1945	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1947	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1957	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1961	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1965	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1967	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1968	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1969	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1970	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1971	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1972	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1973	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1974	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1975	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1976	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1977	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1978	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1979	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1980	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1981	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1982	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1983	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1984	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1986	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1987	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1988	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1989	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1990	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1991	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1992	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1993	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1994	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1995	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1996	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1997	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1998	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1999	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2053	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2100	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2104	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2106	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2110	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2113	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2119	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2125	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2126	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2127	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2128	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2137	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2140	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2142	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2147	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2148	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2149	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2150	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2151	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2153	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2156	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2157	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2158	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2160	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2161	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2165	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2167	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2168	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2169	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2170	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2171	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2172	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2173	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2176	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2178	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2184	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2186	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2188	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2190	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2191	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2192	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2193	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2194	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2195	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2196	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2197	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2198	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2199	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2310	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2319	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2325	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2326	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2327	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2328	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2332	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2337	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2340	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2342	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2347	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2355	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2357	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2361	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2368	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2370	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2372	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2373	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2377	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2380	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2382	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2383	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2385	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2386	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2388	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2390	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2391	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2392	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2393	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2394	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2395	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2396	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2397	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2398	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2399	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2504	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2506	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2510	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2513	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2519	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2525	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2526	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2527	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2532	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2537	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2542	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2547	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2557	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2561	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2568	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2569	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2570	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2571	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2572	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2573	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2574	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2575	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2577	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2578	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2579	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2580	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2581	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2582	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2583	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2584	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2585	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2586	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2587	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2588	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2589	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2590	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2591	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2592	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2593	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2594	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2595	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2596	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2597	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2598	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2599	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2652	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2700	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2704	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2706	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2710	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2713	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2719	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2725	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2726	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2727	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2728	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2732	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2737	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2738	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2740	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2742	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2743	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2747	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2748	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2749	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2752	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2757	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2760	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2761	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2763	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2765	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2766	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2768	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2769	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2770	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2771	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2772	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2773	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2774	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2777	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2778	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2779	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2780	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2781	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2782	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2783	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2784	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2785	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2786	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2787	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2788	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2789	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2790	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2791	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2792	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2793	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2794	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2795	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2796	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2797	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2798	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2799	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2900	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2904	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2906	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2910	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2913	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2918	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2919	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2920	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2922	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2924	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2925	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2926	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2927	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2928	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2930	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2932	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2934	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2935	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2937	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2940	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2942	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2945	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2947	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2957	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2961	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2965	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2967	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2968	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2969	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2970	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2971	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2972	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2973	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2974	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2975	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2976	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2977	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2978	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2979	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2980	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2981	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2982	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2983	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2984	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2986	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2987	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2988	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2989	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2990	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2991	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2992	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2993	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2994	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2995	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2996	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2997	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2998	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2999	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3053	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3135	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3137	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3237	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3335	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3337	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3430	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3432	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3434	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3435	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3437	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3501	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3504	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3505	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3506	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3507	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3508	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3509	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3510	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3511	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3512	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3513	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3514	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3515	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3516	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3517	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3518	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3519	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3520	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3521	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3522	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3543	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3544	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3546	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3551	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3552	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3560	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3562	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3568	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3569	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3571	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3573	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3575	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3577	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3578	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3579	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3580	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3581	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3582	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3583	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3584	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3585	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3586	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3587	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3588	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3589	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3590	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3591	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3601	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3604	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3605	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3606	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3607	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3608	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3609	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3610	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3611	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3612	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3613	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3614	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3615	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3616	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3617	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3618	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3619	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3620	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3621	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3622	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3627	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3631	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3632	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3633	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3634	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3635	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3639	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3641	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3643	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3644	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3645	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3646	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3647	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3649	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3651	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3652	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3653	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3655	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3656	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3657	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3658	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3659	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3660	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3661	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3662	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3663	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3664	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3665	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3666	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3667	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3668	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3669	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3670	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3671	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3672	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3673	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3674	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3675	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3676	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3677	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3678	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3679	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3680	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3681	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3682	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3683	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3684	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3685	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3686	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3688	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3689	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3690	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3691	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3701	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3702	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3704	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3705	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3706	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3707	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3708	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3709	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3710	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3711	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3712	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3713	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3714	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3717	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3718	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3719	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3720	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3721	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3722	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3736	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3737	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3743	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3745	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3748	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3749	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3750	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3757	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3760	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3766	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3767	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3768	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3770	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3772	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3774	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3777	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3801	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3804	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3805	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3806	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3807	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3808	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3809	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3810	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3811	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3812	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3813	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3814	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3817	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3818	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3819	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3820	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3821	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3822	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3835	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3837	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3839	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3841	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3843	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3846	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3848	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3850	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3851	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3853	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3855	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3857	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3858	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3860	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3862	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3864	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3866	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3868	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3870	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3872	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3874	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3876	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3877	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3901	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3902	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3904	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3905	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3906	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3907	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3908	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3909	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3910	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3911	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3912	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3913	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3914	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3915	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3916	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3917	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3918	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3919	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3920	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3921	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3922	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3927	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3935	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3937	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3943	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3950	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3957	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3961	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3968	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3969	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3970	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3972	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3974	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3975	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3976	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3977	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4001	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4004	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4005	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4006	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4007	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4008	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4009	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4010	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4011	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4012	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4013	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4014	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4015	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4016	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4017	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4018	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4019	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4020	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4021	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4022	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4043	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4050	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4057	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4062	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4063	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4065	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4066	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4067	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4073	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
CN1401	1-770-627-21	s	PIN, CONNECTOR 10P
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D401	8-719-069-28	s	DI 1SS400FJTE61
D402	8-719-069-28	s	DI 1SS400FJTE61
D403	8-719-069-28	s	DI 1SS400FJTE61
D404	8-719-069-28	s	DI 1SS400FJTE61
D405	8-719-069-28	s	DI 1SS400FJTE61
D406	8-719-069-28	s	DI 1SS400FJTE61
D407	8-719-069-28	s	DI 1SS400FJTE61
D408	8-719-069-28	s	DI 1SS400FJTE61
D409	8-719-069-28	s	DI 1SS400FJTE61
D410	8-719-069-28	s	DI 1SS400FJTE61
D411	8-719-069-28	s	DI 1SS400FJTE61
D412	8-719-069-28	s	DI 1SS400FJTE61
D501	6-502-598-01	s	DI SML-D12U8WT86
D502	6-502-598-01	s	DI SML-D12U8WT86
D801	6-502-352-01	s	DI SML-522MU8WT86PQ
D802	6-502-352-01	s	DI SML-522MU8WT86PQ
D803	6-501-436-01	s	DIODE SML412BC6TT86
D804	6-502-598-01	s	DI SML-D12U8WT86
D1301	6-502-598-01	s	DI SML-D12U8WT86
D1302	6-502-598-01	s	DI SML-D12U8WT86
D1303	6-502-598-01	s	DI SML-D12U8WT86
D1304	6-502-598-01	s	DI SML-D12U8WT86
D1305	6-502-598-01	s	DI SML-D12U8WT86
D1306	6-502-598-01	s	DI SML-D12U8WT86
D1307	6-502-598-01	s	DI SML-D12U8WT86
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
DD207	1-487-092-11	s	DC-DC CONVERTER

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E301	1-535-877-22	s	CHIP, CHECKER
E302	1-535-877-22	s	CHIP, CHECKER
E303	1-535-877-22	s	CHIP, CHECKER
E304	1-535-877-22	s	CHIP, CHECKER
E305	1-535-877-22	s	CHIP, CHECKER
E306	1-535-877-22	s	CHIP, CHECKER
E307	1-535-877-22	s	CHIP, CHECKER
E308	1-535-877-22	s	CHIP, CHECKER
E309	1-535-877-22	s	CHIP, CHECKER
E310	1-535-877-22	s	CHIP, CHECKER
E311	1-535-877-22	s	CHIP, CHECKER
E312	1-535-877-22	s	CHIP, CHECKER
E313	1-535-877-22	s	CHIP, CHECKER
E314	1-535-877-22	s	CHIP, CHECKER
E315	1-535-877-22	s	CHIP, CHECKER
E316	1-535-877-22	s	CHIP, CHECKER
E317	1-535-877-22	s	CHIP, CHECKER
E318	1-535-877-22	s	CHIP, CHECKER
E319	1-535-877-22	s	CHIP, CHECKER
E320	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F207	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F208	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3602	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC301	8-759-338-95	s	IC NJM2903V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC413	6-707-035-01	s	IC LP2996MRX
IC414	6-707-035-01	s	IC LP2996MRX
IC415	6-707-035-01	s	IC LP2996MRX

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC416	6-707-035-01	s	IC LP2996MRX
IC501	6-714-616-11	s	IC DS90LV110ATMTX
IC502	6-714-109-01	s	IC LMK03000CISQ
IC503	6-714-109-01	s	IC LMK03000CISQ
IC504	6-714-616-11	s	IC DS90LV110ATMTX
IC505	6-714-616-11	s	IC DS90LV110ATMTX
IC506	6-714-616-11	s	IC DS90LV110ATMTX
IC507	6-714-616-11	s	IC DS90LV110ATMTX
IC601	8-759-639-86	s	IC SN65LVDS32DR
IC602	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC603	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC604	6-708-324-01	s	IC R3112N301A-TR-FA
IC605	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC606	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC607	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC608	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC609	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC610	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC611	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC702	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC703	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC704	8-759-570-90	s	IC AD8032ARMZ
IC801	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC802	6-710-018-01	s	IC CAT24C02WI-GT3
IC803	6-714-192-01	s	IC ADT75BRMZ-REEL
IC804	6-714-463-01	s	IC M29W256GL70N6E
IC901	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC902	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC903	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC904	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC905	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC906	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1001	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1002	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1301	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC1302	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1303	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1304	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1401	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1402	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1501	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1502	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1701	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1702	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1901	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1902	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2101	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2102	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2301	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2302	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2501	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2502	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2701	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2702	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2901	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2902	6-710-620-01	s	IC EDD2516AETA-5B-E
IC3101	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3102	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC3103	8-759-388-62	s	IC NJU7062M(TE2)
IC3201	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3202	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3203	8-759-388-62	s	IC NJU7062M(TE2)
IC3301	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3302	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3303	8-759-388-62	s	IC NJU7062M(TE2)
IC3401	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3402	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC3403	8-759-388-62	s	IC NJU7062M(TE2)
IC3501	8-759-388-62	s	IC NJU7062M(TE2)
IC3601	8-759-388-62	s	IC NJU7062M(TE2)
L501	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L502	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1700	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1900	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2100	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2300	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2700	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2900	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3505	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3506	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3507	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3508	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3509	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3510	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3511	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3512	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3513	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3514	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3515	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3516	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3517	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3518	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3601	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3602	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3603	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3604	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3605	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3606	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3607	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3608	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3609	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3610	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L3611	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3612	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3613	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3614	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3615	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3616	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3617	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3618	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3707	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3708	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3709	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3710	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3711	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3712	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3713	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3714	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3715	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3716	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3717	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3718	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3801	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3802	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3803	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3804	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3805	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3806	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3807	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3808	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3809	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3810	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3811	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3812	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3813	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3814	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3815	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3816	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3817	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3818	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3909	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3910	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3911	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3912	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3913	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3914	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3915	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L3916	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3917	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3918	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L4001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4009	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4010	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4011	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4012	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4013	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4014	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4015	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4016	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4017	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4018	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q312	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q313	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q314	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-218-985-11	s	RES, CHIP 470K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-927-81	s	RES, CHIP 47K (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-715-11	s	RES, CHIP 22K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-935-81	s	RES, CHIP 100K (1005)
R220	1-208-935-81	s	RES, CHIP 100K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-715-11	s	RES, CHIP 22K (1005)
R225	1-208-879-81	s	RES, CHIP 470 (1005)
R226	1-208-903-81	s	RES, CHIP 4.7K (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-903-81	s	RES, CHIP 4.7K (1005)
R230	1-208-927-81	s	RES, CHIP 47K (1005)
R231	1-208-927-81	s	RES, CHIP 47K (1005)
R232	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R239	1-208-911-81	s	RES, CHIP 10K (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-895-81	s	RES, CHIP 2.2K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-903-81	s	RES, CHIP 4.7K (1005)
R245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R246	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-911-81	s	RES, CHIP 10K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-903-81	s	RES, CHIP 4.7K (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-935-81	s	RES, CHIP 100K (1005)
R332	1-208-911-81	s	RES, CHIP 10K (1005)
R333	1-208-903-81	s	RES, CHIP 4.7K (1005)
R334	1-208-895-81	s	RES, CHIP 2.2K (1005)
R335	1-208-903-81	s	RES, CHIP 4.7K (1005)
R336	1-208-911-81	s	RES, CHIP 10K (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-935-81	s	RES, CHIP 100K (1005)
R339	1-208-911-81	s	RES, CHIP 10K (1005)
R340	1-208-903-81	s	RES, CHIP 4.7K (1005)
R341	1-208-895-81	s	RES, CHIP 2.2K (1005)
R342	1-208-715-11	s	RES, CHIP 22K (1005)
R343	1-208-911-81	s	RES, CHIP 10K (1005)
R344	1-208-935-81	s	RES, CHIP 100K (1005)
R345	1-208-911-81	s	RES, CHIP 10K (1005)
R346	1-208-903-81	s	RES, CHIP 4.7K (1005)
R347	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R405	1-208-927-81	s	RES, CHIP 47K (1005)
R406	1-208-927-81	s	RES, CHIP 47K (1005)
R407	1-208-927-81	s	RES, CHIP 47K (1005)
R408	1-208-927-81	s	RES, CHIP 47K (1005)
R409	1-208-887-81	s	RES, CHIP 1.0K (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R416	1-208-903-81	s	RES, CHIP 4.7K (1005)
R417	1-208-715-11	s	RES, CHIP 22K (1005)
R418	1-208-715-11	s	RES, CHIP 22K (1005)
R419	1-208-715-11	s	RES, CHIP 22K (1005)
R420	1-208-715-11	s	RES, CHIP 22K (1005)
R421	1-208-903-81	s	RES, CHIP 4.7K (1005)
R422	1-208-903-81	s	RES, CHIP 4.7K (1005)
R423	1-208-903-81	s	RES, CHIP 4.7K (1005)
R424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R425	1-208-903-81	s	RES, CHIP 4.7K (1005)
R426	1-208-903-81	s	RES, CHIP 4.7K (1005)
R427	1-208-903-81	s	RES, CHIP 4.7K (1005)
R428	1-208-903-81	s	RES, CHIP 4.7K (1005)
R429	1-208-927-81	s	RES, CHIP 47K (1005)
R430	1-208-927-81	s	RES, CHIP 47K (1005)
R431	1-208-927-81	s	RES, CHIP 47K (1005)
R432	1-208-927-81	s	RES, CHIP 47K (1005)
R433	1-208-887-81	s	RES, CHIP 1.0K (1005)
R434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R436	1-208-887-81	s	RES, CHIP 1.0K (1005)
R437	1-208-887-81	s	RES, CHIP 1.0K (1005)
R438	1-208-887-81	s	RES, CHIP 1.0K (1005)
R439	1-208-887-81	s	RES, CHIP 1.0K (1005)
R440	1-208-887-81	s	RES, CHIP 1.0K (1005)
R441	1-208-887-81	s	RES, CHIP 1.0K (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R442	1-208-887-81	s	RES, CHIP 1.0K (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-903-81	s	RES, CHIP 4.7K (1005)
R446	1-208-903-81	s	RES, CHIP 4.7K (1005)
R447	1-208-903-81	s	RES, CHIP 4.7K (1005)
R448	1-208-903-81	s	RES, CHIP 4.7K (1005)
R449	1-208-903-81	s	RES, CHIP 4.7K (1005)
R450	1-208-903-81	s	RES, CHIP 4.7K (1005)
R451	1-208-903-81	s	RES, CHIP 4.7K (1005)
R452	1-208-903-81	s	RES, CHIP 4.7K (1005)
R453	1-208-927-81	s	RES, CHIP 47K (1005)
R454	1-208-927-81	s	RES, CHIP 47K (1005)
R455	1-208-927-81	s	RES, CHIP 47K (1005)
R456	1-208-927-81	s	RES, CHIP 47K (1005)
R457	1-208-887-81	s	RES, CHIP 1.0K (1005)
R458	1-208-887-81	s	RES, CHIP 1.0K (1005)
R459	1-208-887-81	s	RES, CHIP 1.0K (1005)
R460	1-208-887-81	s	RES, CHIP 1.0K (1005)
R461	1-208-887-81	s	RES, CHIP 1.0K (1005)
R462	1-208-887-81	s	RES, CHIP 1.0K (1005)
R463	1-208-887-81	s	RES, CHIP 1.0K (1005)
R464	1-208-887-81	s	RES, CHIP 1.0K (1005)
R465	1-208-887-81	s	RES, CHIP 1.0K (1005)
R466	1-208-887-81	s	RES, CHIP 1.0K (1005)
R467	1-208-887-81	s	RES, CHIP 1.0K (1005)
R468	1-208-887-81	s	RES, CHIP 1.0K (1005)
R469	1-208-903-81	s	RES, CHIP 4.7K (1005)
R470	1-208-903-81	s	RES, CHIP 4.7K (1005)
R471	1-208-903-81	s	RES, CHIP 4.7K (1005)
R472	1-208-903-81	s	RES, CHIP 4.7K (1005)
R473	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R475	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R476	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R477	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R478	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R480	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R481	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R482	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R483	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R484	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-903-81	s	RES, CHIP 4.7K (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-208-927-81	s	RES, CHIP 47K (1005)
R516	1-208-927-81	s	RES, CHIP 47K (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R517	1-208-863-81	s	RES, CHIP 100 (1005)
R518	1-208-863-81	s	RES, CHIP 100 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R533	1-218-825-91	s	RES, CHIP 120 (1608)
R534	1-218-825-91	s	RES, CHIP 120 (1608)
R539	1-218-825-91	s	RES, CHIP 120 (1608)
R540	1-218-825-91	s	RES, CHIP 120 (1608)
R541	1-208-895-81	s	RES, CHIP 2.2K (1005)
R542	1-208-895-81	s	RES, CHIP 2.2K (1005)
R543	1-218-825-91	s	RES, CHIP 120 (1608)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-218-825-91	s	RES, CHIP 120 (1608)
R546	1-208-911-81	s	RES, CHIP 10K (1005)
R547	1-218-825-91	s	RES, CHIP 120 (1608)
R548	1-218-825-91	s	RES, CHIP 120 (1608)
R549	1-208-887-81	s	RES, CHIP 1.0K (1005)
R550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R551	1-208-863-81	s	RES, CHIP 100 (1005)
R552	1-208-863-81	s	RES, CHIP 100 (1005)
R553	1-208-863-81	s	RES, CHIP 100 (1005)
R554	1-208-863-81	s	RES, CHIP 100 (1005)
R555	1-208-903-81	s	RES, CHIP 4.7K (1005)
R556	1-208-903-81	s	RES, CHIP 4.7K (1005)
R557	1-208-903-81	s	RES, CHIP 4.7K (1005)
R558	1-208-903-81	s	RES, CHIP 4.7K (1005)
R563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R567	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R569	1-218-825-91	s	RES, CHIP 120 (1608)
R570	1-218-825-91	s	RES, CHIP 120 (1608)
R571	1-218-825-91	s	RES, CHIP 120 (1608)
R572	1-218-825-91	s	RES, CHIP 120 (1608)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-208-863-81	s	RES, CHIP 100 (1005)
R604	1-208-903-81	s	RES, CHIP 4.7K (1005)
R605	1-220-878-81	s	RES, CHIP 22 (1005)
R606	1-220-878-81	s	RES, CHIP 22 (1005)
R607	1-220-878-81	s	RES, CHIP 22 (1005)
R608	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-220-878-81	s	RES, CHIP 22 (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R614	1-208-887-81	s	RES, CHIP 1.0K (1005)
R620	1-220-878-81	s	RES, CHIP 22 (1005)
R621	1-220-878-81	s	RES, CHIP 22 (1005)
R622	1-220-878-81	s	RES, CHIP 22 (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R625	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-220-878-81	s	RES, CHIP 22 (1005)
R627	1-220-878-81	s	RES, CHIP 22 (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R629	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-220-878-81	s	RES, CHIP 22 (1005)
R631	1-220-878-81	s	RES, CHIP 22 (1005)
R632	1-220-878-81	s	RES, CHIP 22 (1005)
R633	1-220-878-81	s	RES, CHIP 22 (1005)
R634	1-220-878-81	s	RES, CHIP 22 (1005)
R635	1-220-878-81	s	RES, CHIP 22 (1005)
R636	1-220-878-81	s	RES, CHIP 22 (1005)
R637	1-220-878-81	s	RES, CHIP 22 (1005)
R638	1-220-878-81	s	RES, CHIP 22 (1005)
R639	1-220-878-81	s	RES, CHIP 22 (1005)
R640	1-220-878-81	s	RES, CHIP 22 (1005)
R641	1-220-878-81	s	RES, CHIP 22 (1005)
R642	1-220-878-81	s	RES, CHIP 22 (1005)
R643	1-220-878-81	s	RES, CHIP 22 (1005)
R644	1-220-878-81	s	RES, CHIP 22 (1005)
R645	1-220-878-81	s	RES, CHIP 22 (1005)
R646	1-220-878-81	s	RES, CHIP 22 (1005)
R647	1-220-878-81	s	RES, CHIP 22 (1005)
R648	1-220-878-81	s	RES, CHIP 22 (1005)
R649	1-220-878-81	s	RES, CHIP 22 (1005)
R650	1-220-878-81	s	RES, CHIP 22 (1005)
R651	1-220-878-81	s	RES, CHIP 22 (1005)
R652	1-220-878-81	s	RES, CHIP 22 (1005)
R653	1-220-878-81	s	RES, CHIP 22 (1005)
R654	1-220-878-81	s	RES, CHIP 22 (1005)
R655	1-220-878-81	s	RES, CHIP 22 (1005)
R656	1-220-878-81	s	RES, CHIP 22 (1005)
R657	1-220-878-81	s	RES, CHIP 22 (1005)
R658	1-220-878-81	s	RES, CHIP 22 (1005)
R659	1-220-878-81	s	RES, CHIP 22 (1005)
R660	1-220-878-81	s	RES, CHIP 22 (1005)
R661	1-220-878-81	s	RES, CHIP 22 (1005)
R662	1-220-878-81	s	RES, CHIP 22 (1005)
R663	1-220-878-81	s	RES, CHIP 22 (1005)
R664	1-220-878-81	s	RES, CHIP 22 (1005)
R665	1-220-878-81	s	RES, CHIP 22 (1005)
R666	1-220-878-81	s	RES, CHIP 22 (1005)
R667	1-220-878-81	s	RES, CHIP 22 (1005)
R668	1-220-878-81	s	RES, CHIP 22 (1005)
R669	1-220-878-81	s	RES, CHIP 22 (1005)
R670	1-220-878-81	s	RES, CHIP 22 (1005)
R671	1-220-878-81	s	RES, CHIP 22 (1005)
R672	1-220-878-81	s	RES, CHIP 22 (1005)
R673	1-220-878-81	s	RES, CHIP 22 (1005)
R674	1-220-878-81	s	RES, CHIP 22 (1005)
R675	1-220-878-81	s	RES, CHIP 22 (1005)
R676	1-220-878-81	s	RES, CHIP 22 (1005)
R677	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R678	1-220-878-81	s	RES, CHIP 22 (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R706	1-208-863-81	s	RES, CHIP 100 (1005)
R709	1-208-863-81	s	RES, CHIP 100 (1005)
R710	1-208-863-81	s	RES, CHIP 100 (1005)
R713	1-220-878-81	s	RES, CHIP 22 (1005)
R714	1-220-878-81	s	RES, CHIP 22 (1005)
R715	1-220-878-81	s	RES, CHIP 22 (1005)
R716	1-220-878-81	s	RES, CHIP 22 (1005)
R717	1-220-878-81	s	RES, CHIP 22 (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R719	1-220-878-81	s	RES, CHIP 22 (1005)
R720	1-220-878-81	s	RES, CHIP 22 (1005)
R745	1-208-911-81	s	RES, CHIP 10K (1005)
R746	1-208-887-81	s	RES, CHIP 1.0K (1005)
R747	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R748	1-216-861-91	s	RES, CHIP 2.2M (1608)
R749	1-208-895-81	s	RES, CHIP 2.2K (1005)
R750	1-208-895-81	s	RES, CHIP 2.2K (1005)
R752	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R753	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-220-878-81	s	RES, CHIP 22 (1005)
R804	1-220-878-81	s	RES, CHIP 22 (1005)
R805	1-220-878-81	s	RES, CHIP 22 (1005)
R806	1-220-878-81	s	RES, CHIP 22 (1005)
R807	1-220-878-81	s	RES, CHIP 22 (1005)
R808	1-220-878-81	s	RES, CHIP 22 (1005)
R809	1-220-878-81	s	RES, CHIP 22 (1005)
R810	1-220-878-81	s	RES, CHIP 22 (1005)
R811	1-220-878-81	s	RES, CHIP 22 (1005)
R812	1-220-878-81	s	RES, CHIP 22 (1005)
R813	1-220-878-81	s	RES, CHIP 22 (1005)
R814	1-220-878-81	s	RES, CHIP 22 (1005)
R815	1-220-878-81	s	RES, CHIP 22 (1005)
R816	1-220-878-81	s	RES, CHIP 22 (1005)
R817	1-220-878-81	s	RES, CHIP 22 (1005)
R818	1-220-878-81	s	RES, CHIP 22 (1005)
R819	1-220-878-81	s	RES, CHIP 22 (1005)
R820	1-220-878-81	s	RES, CHIP 22 (1005)
R821	1-220-878-81	s	RES, CHIP 22 (1005)
R824	1-208-911-81	s	RES, CHIP 10K (1005)
R825	1-208-911-81	s	RES, CHIP 10K (1005)
R826	1-208-911-81	s	RES, CHIP 10K (1005)
R827	1-208-911-81	s	RES, CHIP 10K (1005)
R828	1-208-911-81	s	RES, CHIP 10K (1005)
R829	1-208-911-81	s	RES, CHIP 10K (1005)
R830	1-208-911-81	s	RES, CHIP 10K (1005)
R831	1-208-911-81	s	RES, CHIP 10K (1005)
R832	1-208-911-81	s	RES, CHIP 10K (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-887-81	s	RES, CHIP 1.0K (1005)
R836	1-208-871-81	s	RES, CHIP 220 (1005)
R837	1-208-871-81	s	RES, CHIP 220 (1005)
R838	1-208-887-81	s	RES, CHIP 1.0K (1005)
R839	1-208-871-81	s	RES, CHIP 220 (1005)
R840	1-208-887-81	s	RES, CHIP 1.0K (1005)
R841	1-208-911-81	s	RES, CHIP 10K (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R842	1-208-911-81	s	RES, CHIP 10K (1005)
R843	1-208-911-81	s	RES, CHIP 10K (1005)
R844	1-208-911-81	s	RES, CHIP 10K (1005)
R845	1-208-911-81	s	RES, CHIP 10K (1005)
R846	1-208-911-81	s	RES, CHIP 10K (1005)
R847	1-208-911-81	s	RES, CHIP 10K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R850	1-208-911-81	s	RES, CHIP 10K (1005)
R852	1-208-911-81	s	RES, CHIP 10K (1005)
R853	1-208-911-81	s	RES, CHIP 10K (1005)
R855	1-208-911-81	s	RES, CHIP 10K (1005)
R861	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R862	1-220-878-81	s	RES, CHIP 22 (1005)
R863	1-220-878-81	s	RES, CHIP 22 (1005)
R864	1-220-878-81	s	RES, CHIP 22 (1005)
R865	1-220-878-81	s	RES, CHIP 22 (1005)
R866	1-220-878-81	s	RES, CHIP 22 (1005)
R867	1-220-878-81	s	RES, CHIP 22 (1005)
R868	1-220-878-81	s	RES, CHIP 22 (1005)
R869	1-220-878-81	s	RES, CHIP 22 (1005)
R870	1-208-935-81	s	RES, CHIP 100K (1005)
R871	1-208-935-81	s	RES, CHIP 100K (1005)
R872	1-208-935-81	s	RES, CHIP 100K (1005)
R873	1-208-935-81	s	RES, CHIP 100K (1005)
R874	1-208-935-81	s	RES, CHIP 100K (1005)
R875	1-208-935-81	s	RES, CHIP 100K (1005)
R876	1-208-935-81	s	RES, CHIP 100K (1005)
R877	1-208-935-81	s	RES, CHIP 100K (1005)
R878	1-208-911-81	s	RES, CHIP 10K (1005)
R879	1-208-911-81	s	RES, CHIP 10K (1005)
R880	1-208-911-81	s	RES, CHIP 10K (1005)
R881	1-208-911-81	s	RES, CHIP 10K (1005)
R883	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R884	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R885	1-208-935-81	s	RES, CHIP 100K (1005)
R886	1-208-935-81	s	RES, CHIP 100K (1005)
R887	1-220-878-81	s	RES, CHIP 22 (1005)
R888	1-220-878-81	s	RES, CHIP 22 (1005)
R889	1-220-878-81	s	RES, CHIP 22 (1005)
R890	1-208-911-81	s	RES, CHIP 10K (1005)
R891	1-208-911-81	s	RES, CHIP 10K (1005)
R892	1-208-911-81	s	RES, CHIP 10K (1005)
R893	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R894	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R895	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R896	1-208-911-81	s	RES, CHIP 10K (1005)
R897	1-208-911-81	s	RES, CHIP 10K (1005)
R899	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1002	1-208-935-81	s	RES, CHIP 100K (1005)
R1003	1-208-935-81	s	RES, CHIP 100K (1005)
R1004	1-220-878-81	s	RES, CHIP 22 (1005)
R1005	1-220-878-81	s	RES, CHIP 22 (1005)
R1006	1-220-878-81	s	RES, CHIP 22 (1005)
R1007	1-220-878-81	s	RES, CHIP 22 (1005)
R1008	1-220-878-81	s	RES, CHIP 22 (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1010	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1011	1-220-878-81	s	RES, CHIP 22 (1005)
R1012	1-220-878-81	s	RES, CHIP 22 (1005)
R1013	1-208-911-81	s	RES, CHIP 10K (1005)
R1014	1-208-911-81	s	RES, CHIP 10K (1005)
R1015	1-208-911-81	s	RES, CHIP 10K (1005)
R1016	1-208-911-81	s	RES, CHIP 10K (1005)
R1017	1-208-911-81	s	RES, CHIP 10K (1005)
R1018	1-208-911-81	s	RES, CHIP 10K (1005)
R1019	1-208-911-81	s	RES, CHIP 10K (1005)
R1020	1-208-911-81	s	RES, CHIP 10K (1005)
R1101	1-208-911-81	s	RES, CHIP 10K (1005)
R1102	1-208-911-81	s	RES, CHIP 10K (1005)
R1103	1-208-911-81	s	RES, CHIP 10K (1005)
R1104	1-208-911-81	s	RES, CHIP 10K (1005)
R1109	1-208-911-81	s	RES, CHIP 10K (1005)
R1110	1-208-911-81	s	RES, CHIP 10K (1005)
R1203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-208-911-81	s	RES, CHIP 10K (1005)
R1214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1215	1-208-911-81	s	RES, CHIP 10K (1005)
R1216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1217	1-208-911-81	s	RES, CHIP 10K (1005)
R1219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1220	1-208-911-81	s	RES, CHIP 10K (1005)
R1221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1309	1-208-879-81	s	RES, CHIP 470 (1005)
R1311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1312	1-208-879-81	s	RES, CHIP 470 (1005)
R1313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1315	1-208-879-81	s	RES, CHIP 470 (1005)
R1316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1318	1-208-879-81	s	RES, CHIP 470 (1005)
R1319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1321	1-208-879-81	s	RES, CHIP 470 (1005)
R1322	1-208-879-81	s	RES, CHIP 470 (1005)
R1323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1327	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1328	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1333	1-208-911-81	s	RES, CHIP 10K (1005)
R1335	1-208-911-81	s	RES, CHIP 10K (1005)
R1337	1-208-911-81	s	RES, CHIP 10K (1005)
R1339	1-208-911-81	s	RES, CHIP 10K (1005)
R1341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1342	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1344	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1345	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1346	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1348	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1351	1-208-911-81	s	RES, CHIP 10K (1005)
R1353	1-208-911-81	s	RES, CHIP 10K (1005)
R1355	1-208-911-81	s	RES, CHIP 10K (1005)
R1357	1-208-911-81	s	RES, CHIP 10K (1005)
R1359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1361	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1363	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1369	1-208-911-81	s	RES, CHIP 10K (1005)
R1371	1-208-911-81	s	RES, CHIP 10K (1005)
R1373	1-208-911-81	s	RES, CHIP 10K (1005)
R1375	1-208-911-81	s	RES, CHIP 10K (1005)
R1377	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1378	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1379	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1380	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1381	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1382	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1395	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1396	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1397	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1398	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1399	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1400	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1401	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1402	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1403	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1404	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1405	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1406	1-208-855-81	s	RES, CHIP 47 (1005)
R1407	1-208-855-81	s	RES, CHIP 47 (1005)
R1408	1-208-855-81	s	RES, CHIP 47 (1005)
R1409	1-208-855-81	s	RES, CHIP 47 (1005)
R1410	1-208-855-81	s	RES, CHIP 47 (1005)
R1411	1-208-855-81	s	RES, CHIP 47 (1005)
R1412	1-208-855-81	s	RES, CHIP 47 (1005)
R1413	1-208-855-81	s	RES, CHIP 47 (1005)
R1414	1-208-855-81	s	RES, CHIP 47 (1005)
R1415	1-208-855-81	s	RES, CHIP 47 (1005)
R1416	1-208-855-81	s	RES, CHIP 47 (1005)
R1417	1-208-855-81	s	RES, CHIP 47 (1005)
R1418	1-208-855-81	s	RES, CHIP 47 (1005)
R1419	1-208-855-81	s	RES, CHIP 47 (1005)
R1420	1-208-855-81	s	RES, CHIP 47 (1005)
R1421	1-208-855-81	s	RES, CHIP 47 (1005)
R1423	1-208-855-81	s	RES, CHIP 47 (1005)
R1424	1-208-855-81	s	RES, CHIP 47 (1005)
R1425	1-208-855-81	s	RES, CHIP 47 (1005)
R1426	1-208-855-81	s	RES, CHIP 47 (1005)
R1427	1-208-855-81	s	RES, CHIP 47 (1005)
R1428	1-208-855-81	s	RES, CHIP 47 (1005)
R1429	1-208-855-81	s	RES, CHIP 47 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1500	1-208-855-81	s	RES, CHIP 47 (1005)
R1501	1-208-855-81	s	RES, CHIP 47 (1005)
R1502	1-208-855-81	s	RES, CHIP 47 (1005)
R1503	1-208-855-81	s	RES, CHIP 47 (1005)
R1504	1-208-855-81	s	RES, CHIP 47 (1005)
R1505	1-208-855-81	s	RES, CHIP 47 (1005)
R1506	1-220-878-81	s	RES, CHIP 22 (1005)
R1507	1-220-878-81	s	RES, CHIP 22 (1005)
R1508	1-220-878-81	s	RES, CHIP 22 (1005)
R1509	1-220-878-81	s	RES, CHIP 22 (1005)
R1510	1-208-855-81	s	RES, CHIP 47 (1005)
R1511	1-208-855-81	s	RES, CHIP 47 (1005)
R1512	1-208-863-81	s	RES, CHIP 100 (1005)
R1513	1-208-863-81	s	RES, CHIP 100 (1005)
R1514	1-208-855-81	s	RES, CHIP 47 (1005)
R1515	1-208-855-81	s	RES, CHIP 47 (1005)
R1516	1-208-863-81	s	RES, CHIP 100 (1005)
R1517	1-208-863-81	s	RES, CHIP 100 (1005)
R1518	1-208-863-81	s	RES, CHIP 100 (1005)
R1519	1-208-863-81	s	RES, CHIP 100 (1005)
R1520	1-208-863-81	s	RES, CHIP 100 (1005)
R1521	1-208-863-81	s	RES, CHIP 100 (1005)
R1522	1-208-863-81	s	RES, CHIP 100 (1005)
R1523	1-208-863-81	s	RES, CHIP 100 (1005)
R1524	1-208-863-81	s	RES, CHIP 100 (1005)
R1525	1-208-863-81	s	RES, CHIP 100 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1528	1-208-863-81	s	RES, CHIP 100 (1005)
R1529	1-208-863-81	s	RES, CHIP 100 (1005)
R1530	1-208-863-81	s	RES, CHIP 100 (1005)
R1531	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-208-863-81	s	RES, CHIP 100 (1005)
R1533	1-208-863-81	s	RES, CHIP 100 (1005)
R1600	1-220-878-81	s	RES, CHIP 22 (1005)
R1601	1-220-878-81	s	RES, CHIP 22 (1005)
R1602	1-220-878-81	s	RES, CHIP 22 (1005)
R1603	1-220-878-81	s	RES, CHIP 22 (1005)
R1604	1-220-878-81	s	RES, CHIP 22 (1005)
R1605	1-220-878-81	s	RES, CHIP 22 (1005)
R1608	1-208-935-81	s	RES, CHIP 100K (1005)
R1609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1613	1-208-935-81	s	RES, CHIP 100K (1005)
R1614	1-208-935-81	s	RES, CHIP 100K (1005)
R1615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1617	1-220-878-81	s	RES, CHIP 22 (1005)
R1618	1-220-878-81	s	RES, CHIP 22 (1005)
R1619	1-220-878-81	s	RES, CHIP 22 (1005)
R1620	1-220-878-81	s	RES, CHIP 22 (1005)
R1621	1-220-878-81	s	RES, CHIP 22 (1005)
R1622	1-220-878-81	s	RES, CHIP 22 (1005)
R1623	1-220-878-81	s	RES, CHIP 22 (1005)
R1624	1-220-878-81	s	RES, CHIP 22 (1005)
R1626	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1630	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1636	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1639	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1640	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1642	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1643	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1644	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1700	1-208-855-81	s	RES, CHIP 47 (1005)
R1701	1-208-855-81	s	RES, CHIP 47 (1005)
R1702	1-208-855-81	s	RES, CHIP 47 (1005)
R1703	1-208-855-81	s	RES, CHIP 47 (1005)
R1704	1-208-855-81	s	RES, CHIP 47 (1005)
R1705	1-208-855-81	s	RES, CHIP 47 (1005)
R1706	1-220-878-81	s	RES, CHIP 22 (1005)
R1707	1-220-878-81	s	RES, CHIP 22 (1005)
R1708	1-220-878-81	s	RES, CHIP 22 (1005)
R1709	1-220-878-81	s	RES, CHIP 22 (1005)
R1710	1-208-855-81	s	RES, CHIP 47 (1005)
R1711	1-208-855-81	s	RES, CHIP 47 (1005)
R1712	1-208-863-81	s	RES, CHIP 100 (1005)
R1713	1-208-863-81	s	RES, CHIP 100 (1005)
R1714	1-208-855-81	s	RES, CHIP 47 (1005)
R1715	1-208-855-81	s	RES, CHIP 47 (1005)
R1716	1-208-863-81	s	RES, CHIP 100 (1005)
R1717	1-208-863-81	s	RES, CHIP 100 (1005)
R1718	1-208-863-81	s	RES, CHIP 100 (1005)
R1719	1-208-863-81	s	RES, CHIP 100 (1005)
R1720	1-208-863-81	s	RES, CHIP 100 (1005)
R1721	1-208-863-81	s	RES, CHIP 100 (1005)
R1722	1-208-863-81	s	RES, CHIP 100 (1005)
R1723	1-208-863-81	s	RES, CHIP 100 (1005)
R1724	1-208-863-81	s	RES, CHIP 100 (1005)
R1725	1-208-863-81	s	RES, CHIP 100 (1005)
R1726	1-208-863-81	s	RES, CHIP 100 (1005)
R1727	1-208-863-81	s	RES, CHIP 100 (1005)
R1728	1-208-863-81	s	RES, CHIP 100 (1005)
R1729	1-208-863-81	s	RES, CHIP 100 (1005)
R1730	1-208-863-81	s	RES, CHIP 100 (1005)
R1731	1-208-863-81	s	RES, CHIP 100 (1005)
R1732	1-208-863-81	s	RES, CHIP 100 (1005)
R1733	1-208-863-81	s	RES, CHIP 100 (1005)
R1800	1-220-878-81	s	RES, CHIP 22 (1005)
R1801	1-220-878-81	s	RES, CHIP 22 (1005)
R1802	1-220-878-81	s	RES, CHIP 22 (1005)
R1803	1-220-878-81	s	RES, CHIP 22 (1005)
R1804	1-220-878-81	s	RES, CHIP 22 (1005)
R1805	1-220-878-81	s	RES, CHIP 22 (1005)
R1808	1-208-935-81	s	RES, CHIP 100K (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1813	1-208-935-81	s	RES, CHIP 100K (1005)
R1814	1-208-935-81	s	RES, CHIP 100K (1005)
R1815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1817	1-220-878-81	s	RES, CHIP 22 (1005)
R1818	1-220-878-81	s	RES, CHIP 22 (1005)
R1819	1-220-878-81	s	RES, CHIP 22 (1005)
R1820	1-220-878-81	s	RES, CHIP 22 (1005)
R1821	1-220-878-81	s	RES, CHIP 22 (1005)
R1822	1-220-878-81	s	RES, CHIP 22 (1005)
R1823	1-220-878-81	s	RES, CHIP 22 (1005)
R1824	1-220-878-81	s	RES, CHIP 22 (1005)
R1826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1839	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1841	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1842	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1843	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1844	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1900	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-855-81	s	RES, CHIP 47 (1005)
R1902	1-208-855-81	s	RES, CHIP 47 (1005)
R1903	1-208-855-81	s	RES, CHIP 47 (1005)
R1904	1-208-855-81	s	RES, CHIP 47 (1005)
R1905	1-208-855-81	s	RES, CHIP 47 (1005)
R1906	1-220-878-81	s	RES, CHIP 22 (1005)
R1907	1-220-878-81	s	RES, CHIP 22 (1005)
R1908	1-220-878-81	s	RES, CHIP 22 (1005)
R1909	1-220-878-81	s	RES, CHIP 22 (1005)
R1910	1-208-855-81	s	RES, CHIP 47 (1005)
R1911	1-208-855-81	s	RES, CHIP 47 (1005)
R1912	1-208-863-81	s	RES, CHIP 100 (1005)
R1913	1-208-863-81	s	RES, CHIP 100 (1005)
R1914	1-208-855-81	s	RES, CHIP 47 (1005)
R1915	1-208-855-81	s	RES, CHIP 47 (1005)
R1916	1-208-863-81	s	RES, CHIP 100 (1005)
R1917	1-208-863-81	s	RES, CHIP 100 (1005)
R1918	1-208-863-81	s	RES, CHIP 100 (1005)
R1919	1-208-863-81	s	RES, CHIP 100 (1005)
R1920	1-208-863-81	s	RES, CHIP 100 (1005)
R1921	1-208-863-81	s	RES, CHIP 100 (1005)
R1922	1-208-863-81	s	RES, CHIP 100 (1005)
R1923	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1924	1-208-863-81	s	RES, CHIP 100 (1005)
R1925	1-208-863-81	s	RES, CHIP 100 (1005)
R1926	1-208-863-81	s	RES, CHIP 100 (1005)
R1927	1-208-863-81	s	RES, CHIP 100 (1005)
R1928	1-208-863-81	s	RES, CHIP 100 (1005)
R1929	1-208-863-81	s	RES, CHIP 100 (1005)
R1930	1-208-863-81	s	RES, CHIP 100 (1005)
R1931	1-208-863-81	s	RES, CHIP 100 (1005)
R1932	1-208-863-81	s	RES, CHIP 100 (1005)
R1933	1-208-863-81	s	RES, CHIP 100 (1005)
R2000	1-220-878-81	s	RES, CHIP 22 (1005)
R2001	1-220-878-81	s	RES, CHIP 22 (1005)
R2002	1-220-878-81	s	RES, CHIP 22 (1005)
R2003	1-220-878-81	s	RES, CHIP 22 (1005)
R2004	1-220-878-81	s	RES, CHIP 22 (1005)
R2005	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-208-935-81	s	RES, CHIP 100K (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2013	1-208-935-81	s	RES, CHIP 100K (1005)
R2014	1-208-935-81	s	RES, CHIP 100K (1005)
R2015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2017	1-220-878-81	s	RES, CHIP 22 (1005)
R2018	1-220-878-81	s	RES, CHIP 22 (1005)
R2019	1-220-878-81	s	RES, CHIP 22 (1005)
R2020	1-220-878-81	s	RES, CHIP 22 (1005)
R2021	1-220-878-81	s	RES, CHIP 22 (1005)
R2022	1-220-878-81	s	RES, CHIP 22 (1005)
R2023	1-220-878-81	s	RES, CHIP 22 (1005)
R2024	1-220-878-81	s	RES, CHIP 22 (1005)
R2026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-220-878-81	s	RES, CHIP 22 (1005)
R2109	1-220-878-81	s	RES, CHIP 22 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-863-81	s	RES, CHIP 100 (1005)
R2113	1-208-863-81	s	RES, CHIP 100 (1005)
R2114	1-208-855-81	s	RES, CHIP 47 (1005)
R2115	1-208-855-81	s	RES, CHIP 47 (1005)
R2116	1-208-863-81	s	RES, CHIP 100 (1005)
R2117	1-208-863-81	s	RES, CHIP 100 (1005)
R2118	1-208-863-81	s	RES, CHIP 100 (1005)
R2119	1-208-863-81	s	RES, CHIP 100 (1005)
R2120	1-208-863-81	s	RES, CHIP 100 (1005)
R2121	1-208-863-81	s	RES, CHIP 100 (1005)
R2122	1-208-863-81	s	RES, CHIP 100 (1005)
R2123	1-208-863-81	s	RES, CHIP 100 (1005)
R2124	1-208-863-81	s	RES, CHIP 100 (1005)
R2125	1-208-863-81	s	RES, CHIP 100 (1005)
R2126	1-208-863-81	s	RES, CHIP 100 (1005)
R2127	1-208-863-81	s	RES, CHIP 100 (1005)
R2128	1-208-863-81	s	RES, CHIP 100 (1005)
R2129	1-208-863-81	s	RES, CHIP 100 (1005)
R2130	1-208-863-81	s	RES, CHIP 100 (1005)
R2131	1-208-863-81	s	RES, CHIP 100 (1005)
R2132	1-208-863-81	s	RES, CHIP 100 (1005)
R2133	1-208-863-81	s	RES, CHIP 100 (1005)
R2200	1-220-878-81	s	RES, CHIP 22 (1005)
R2201	1-220-878-81	s	RES, CHIP 22 (1005)
R2202	1-220-878-81	s	RES, CHIP 22 (1005)
R2203	1-220-878-81	s	RES, CHIP 22 (1005)
R2204	1-220-878-81	s	RES, CHIP 22 (1005)
R2205	1-220-878-81	s	RES, CHIP 22 (1005)
R2208	1-208-935-81	s	RES, CHIP 100K (1005)
R2209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2213	1-208-935-81	s	RES, CHIP 100K (1005)
R2214	1-208-935-81	s	RES, CHIP 100K (1005)
R2215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2217	1-220-878-81	s	RES, CHIP 22 (1005)
R2218	1-220-878-81	s	RES, CHIP 22 (1005)
R2219	1-220-878-81	s	RES, CHIP 22 (1005)
R2220	1-220-878-81	s	RES, CHIP 22 (1005)
R2221	1-220-878-81	s	RES, CHIP 22 (1005)
R2222	1-220-878-81	s	RES, CHIP 22 (1005)
R2223	1-220-878-81	s	RES, CHIP 22 (1005)
R2224	1-220-878-81	s	RES, CHIP 22 (1005)
R2226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2234	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2239	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2300	1-208-855-81	s	RES, CHIP 47 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2307	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-220-878-81	s	RES, CHIP 22 (1005)
R2309	1-220-878-81	s	RES, CHIP 22 (1005)
R2310	1-208-855-81	s	RES, CHIP 47 (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-863-81	s	RES, CHIP 100 (1005)
R2313	1-208-863-81	s	RES, CHIP 100 (1005)
R2314	1-208-855-81	s	RES, CHIP 47 (1005)
R2315	1-208-855-81	s	RES, CHIP 47 (1005)
R2316	1-208-863-81	s	RES, CHIP 100 (1005)
R2317	1-208-863-81	s	RES, CHIP 100 (1005)
R2318	1-208-863-81	s	RES, CHIP 100 (1005)
R2319	1-208-863-81	s	RES, CHIP 100 (1005)
R2320	1-208-863-81	s	RES, CHIP 100 (1005)
R2321	1-208-863-81	s	RES, CHIP 100 (1005)
R2322	1-208-863-81	s	RES, CHIP 100 (1005)
R2323	1-208-863-81	s	RES, CHIP 100 (1005)
R2324	1-208-863-81	s	RES, CHIP 100 (1005)
R2325	1-208-863-81	s	RES, CHIP 100 (1005)
R2326	1-208-863-81	s	RES, CHIP 100 (1005)
R2327	1-208-863-81	s	RES, CHIP 100 (1005)
R2328	1-208-863-81	s	RES, CHIP 100 (1005)
R2329	1-208-863-81	s	RES, CHIP 100 (1005)
R2330	1-208-863-81	s	RES, CHIP 100 (1005)
R2331	1-208-863-81	s	RES, CHIP 100 (1005)
R2332	1-208-863-81	s	RES, CHIP 100 (1005)
R2333	1-208-863-81	s	RES, CHIP 100 (1005)
R2400	1-220-878-81	s	RES, CHIP 22 (1005)
R2401	1-220-878-81	s	RES, CHIP 22 (1005)
R2402	1-220-878-81	s	RES, CHIP 22 (1005)
R2403	1-220-878-81	s	RES, CHIP 22 (1005)
R2404	1-220-878-81	s	RES, CHIP 22 (1005)
R2405	1-220-878-81	s	RES, CHIP 22 (1005)
R2408	1-208-935-81	s	RES, CHIP 100K (1005)
R2409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2413	1-208-935-81	s	RES, CHIP 100K (1005)
R2414	1-208-935-81	s	RES, CHIP 100K (1005)
R2415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2416	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2417	1-220-878-81	s	RES, CHIP 22 (1005)
R2418	1-220-878-81	s	RES, CHIP 22 (1005)
R2419	1-220-878-81	s	RES, CHIP 22 (1005)
R2420	1-220-878-81	s	RES, CHIP 22 (1005)
R2421	1-220-878-81	s	RES, CHIP 22 (1005)
R2422	1-220-878-81	s	RES, CHIP 22 (1005)
R2423	1-220-878-81	s	RES, CHIP 22 (1005)
R2424	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2439	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2500	1-208-855-81	s	RES, CHIP 47 (1005)
R2501	1-208-855-81	s	RES, CHIP 47 (1005)
R2502	1-208-855-81	s	RES, CHIP 47 (1005)
R2503	1-208-855-81	s	RES, CHIP 47 (1005)
R2504	1-208-855-81	s	RES, CHIP 47 (1005)
R2505	1-208-855-81	s	RES, CHIP 47 (1005)
R2506	1-220-878-81	s	RES, CHIP 22 (1005)
R2507	1-220-878-81	s	RES, CHIP 22 (1005)
R2508	1-220-878-81	s	RES, CHIP 22 (1005)
R2509	1-220-878-81	s	RES, CHIP 22 (1005)
R2510	1-208-855-81	s	RES, CHIP 47 (1005)
R2511	1-208-855-81	s	RES, CHIP 47 (1005)
R2512	1-208-863-81	s	RES, CHIP 100 (1005)
R2513	1-208-863-81	s	RES, CHIP 100 (1005)
R2514	1-208-855-81	s	RES, CHIP 47 (1005)
R2515	1-208-855-81	s	RES, CHIP 47 (1005)
R2516	1-208-863-81	s	RES, CHIP 100 (1005)
R2517	1-208-863-81	s	RES, CHIP 100 (1005)
R2518	1-208-863-81	s	RES, CHIP 100 (1005)
R2519	1-208-863-81	s	RES, CHIP 100 (1005)
R2520	1-208-863-81	s	RES, CHIP 100 (1005)
R2521	1-208-863-81	s	RES, CHIP 100 (1005)
R2522	1-208-863-81	s	RES, CHIP 100 (1005)
R2523	1-208-863-81	s	RES, CHIP 100 (1005)
R2524	1-208-863-81	s	RES, CHIP 100 (1005)
R2525	1-208-863-81	s	RES, CHIP 100 (1005)
R2526	1-208-863-81	s	RES, CHIP 100 (1005)
R2527	1-208-863-81	s	RES, CHIP 100 (1005)
R2528	1-208-863-81	s	RES, CHIP 100 (1005)
R2529	1-208-863-81	s	RES, CHIP 100 (1005)
R2530	1-208-863-81	s	RES, CHIP 100 (1005)
R2531	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2532	1-208-863-81	s	RES, CHIP 100 (1005)
R2533	1-208-863-81	s	RES, CHIP 100 (1005)
R2600	1-220-878-81	s	RES, CHIP 22 (1005)
R2601	1-220-878-81	s	RES, CHIP 22 (1005)
R2602	1-220-878-81	s	RES, CHIP 22 (1005)
R2603	1-220-878-81	s	RES, CHIP 22 (1005)
R2604	1-220-878-81	s	RES, CHIP 22 (1005)
R2605	1-220-878-81	s	RES, CHIP 22 (1005)
R2608	1-208-935-81	s	RES, CHIP 100K (1005)
R2609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2613	1-208-935-81	s	RES, CHIP 100K (1005)
R2614	1-208-935-81	s	RES, CHIP 100K (1005)
R2615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2617	1-220-878-81	s	RES, CHIP 22 (1005)
R2618	1-220-878-81	s	RES, CHIP 22 (1005)
R2619	1-220-878-81	s	RES, CHIP 22 (1005)
R2620	1-220-878-81	s	RES, CHIP 22 (1005)
R2621	1-220-878-81	s	RES, CHIP 22 (1005)
R2622	1-220-878-81	s	RES, CHIP 22 (1005)
R2623	1-220-878-81	s	RES, CHIP 22 (1005)
R2624	1-220-878-81	s	RES, CHIP 22 (1005)
R2626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2630	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2636	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2639	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2640	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2642	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2643	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2644	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2700	1-208-855-81	s	RES, CHIP 47 (1005)
R2701	1-208-855-81	s	RES, CHIP 47 (1005)
R2702	1-208-855-81	s	RES, CHIP 47 (1005)
R2703	1-208-855-81	s	RES, CHIP 47 (1005)
R2704	1-208-855-81	s	RES, CHIP 47 (1005)
R2705	1-208-855-81	s	RES, CHIP 47 (1005)
R2706	1-220-878-81	s	RES, CHIP 22 (1005)
R2707	1-220-878-81	s	RES, CHIP 22 (1005)
R2708	1-220-878-81	s	RES, CHIP 22 (1005)
R2709	1-220-878-81	s	RES, CHIP 22 (1005)
R2710	1-208-855-81	s	RES, CHIP 47 (1005)
R2711	1-208-855-81	s	RES, CHIP 47 (1005)
R2712	1-208-863-81	s	RES, CHIP 100 (1005)
R2713	1-208-863-81	s	RES, CHIP 100 (1005)
R2714	1-208-855-81	s	RES, CHIP 47 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2715	1-208-855-81	s	RES, CHIP 47 (1005)
R2716	1-208-863-81	s	RES, CHIP 100 (1005)
R2717	1-208-863-81	s	RES, CHIP 100 (1005)
R2718	1-208-863-81	s	RES, CHIP 100 (1005)
R2719	1-208-863-81	s	RES, CHIP 100 (1005)
R2720	1-208-863-81	s	RES, CHIP 100 (1005)
R2721	1-208-863-81	s	RES, CHIP 100 (1005)
R2722	1-208-863-81	s	RES, CHIP 100 (1005)
R2723	1-208-863-81	s	RES, CHIP 100 (1005)
R2724	1-208-863-81	s	RES, CHIP 100 (1005)
R2725	1-208-863-81	s	RES, CHIP 100 (1005)
R2726	1-208-863-81	s	RES, CHIP 100 (1005)
R2727	1-208-863-81	s	RES, CHIP 100 (1005)
R2728	1-208-863-81	s	RES, CHIP 100 (1005)
R2729	1-208-863-81	s	RES, CHIP 100 (1005)
R2730	1-208-863-81	s	RES, CHIP 100 (1005)
R2731	1-208-863-81	s	RES, CHIP 100 (1005)
R2732	1-208-863-81	s	RES, CHIP 100 (1005)
R2733	1-208-863-81	s	RES, CHIP 100 (1005)
R2800	1-220-878-81	s	RES, CHIP 22 (1005)
R2801	1-220-878-81	s	RES, CHIP 22 (1005)
R2802	1-220-878-81	s	RES, CHIP 22 (1005)
R2803	1-220-878-81	s	RES, CHIP 22 (1005)
R2804	1-220-878-81	s	RES, CHIP 22 (1005)
R2805	1-220-878-81	s	RES, CHIP 22 (1005)
R2808	1-208-935-81	s	RES, CHIP 100K (1005)
R2809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2813	1-208-935-81	s	RES, CHIP 100K (1005)
R2814	1-208-935-81	s	RES, CHIP 100K (1005)
R2815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2817	1-220-878-81	s	RES, CHIP 22 (1005)
R2818	1-220-878-81	s	RES, CHIP 22 (1005)
R2819	1-220-878-81	s	RES, CHIP 22 (1005)
R2820	1-220-878-81	s	RES, CHIP 22 (1005)
R2821	1-220-878-81	s	RES, CHIP 22 (1005)
R2822	1-220-878-81	s	RES, CHIP 22 (1005)
R2823	1-220-878-81	s	RES, CHIP 22 (1005)
R2824	1-220-878-81	s	RES, CHIP 22 (1005)
R2826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2839	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2841	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2842	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2843	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2844	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2900	1-208-855-81	s	RES, CHIP 47 (1005)
R2901	1-208-855-81	s	RES, CHIP 47 (1005)
R2902	1-208-855-81	s	RES, CHIP 47 (1005)
R2903	1-208-855-81	s	RES, CHIP 47 (1005)
R2904	1-208-855-81	s	RES, CHIP 47 (1005)
R2905	1-208-855-81	s	RES, CHIP 47 (1005)
R2906	1-220-878-81	s	RES, CHIP 22 (1005)
R2907	1-220-878-81	s	RES, CHIP 22 (1005)
R2908	1-220-878-81	s	RES, CHIP 22 (1005)
R2909	1-220-878-81	s	RES, CHIP 22 (1005)
R2910	1-208-855-81	s	RES, CHIP 47 (1005)
R2911	1-208-855-81	s	RES, CHIP 47 (1005)
R2912	1-208-863-81	s	RES, CHIP 100 (1005)
R2913	1-208-863-81	s	RES, CHIP 100 (1005)
R2914	1-208-855-81	s	RES, CHIP 47 (1005)
R2915	1-208-855-81	s	RES, CHIP 47 (1005)
R2916	1-208-863-81	s	RES, CHIP 100 (1005)
R2917	1-208-863-81	s	RES, CHIP 100 (1005)
R2918	1-208-863-81	s	RES, CHIP 100 (1005)
R2919	1-208-863-81	s	RES, CHIP 100 (1005)
R2920	1-208-863-81	s	RES, CHIP 100 (1005)
R2921	1-208-863-81	s	RES, CHIP 100 (1005)
R2922	1-208-863-81	s	RES, CHIP 100 (1005)
R2923	1-208-863-81	s	RES, CHIP 100 (1005)
R2924	1-208-863-81	s	RES, CHIP 100 (1005)
R2925	1-208-863-81	s	RES, CHIP 100 (1005)
R2926	1-208-863-81	s	RES, CHIP 100 (1005)
R2927	1-208-863-81	s	RES, CHIP 100 (1005)
R2928	1-208-863-81	s	RES, CHIP 100 (1005)
R2929	1-208-863-81	s	RES, CHIP 100 (1005)
R2930	1-208-863-81	s	RES, CHIP 100 (1005)
R2931	1-208-863-81	s	RES, CHIP 100 (1005)
R2932	1-208-863-81	s	RES, CHIP 100 (1005)
R2933	1-208-863-81	s	RES, CHIP 100 (1005)
R3000	1-220-878-81	s	RES, CHIP 22 (1005)
R3001	1-220-878-81	s	RES, CHIP 22 (1005)
R3002	1-220-878-81	s	RES, CHIP 22 (1005)
R3003	1-220-878-81	s	RES, CHIP 22 (1005)
R3004	1-220-878-81	s	RES, CHIP 22 (1005)
R3005	1-220-878-81	s	RES, CHIP 22 (1005)
R3008	1-208-935-81	s	RES, CHIP 100K (1005)
R3009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3013	1-208-935-81	s	RES, CHIP 100K (1005)
R3014	1-208-935-81	s	RES, CHIP 100K (1005)
R3015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3017	1-220-878-81	s	RES, CHIP 22 (1005)
R3018	1-220-878-81	s	RES, CHIP 22 (1005)
R3019	1-220-878-81	s	RES, CHIP 22 (1005)
R3020	1-220-878-81	s	RES, CHIP 22 (1005)
R3021	1-220-878-81	s	RES, CHIP 22 (1005)
R3022	1-220-878-81	s	RES, CHIP 22 (1005)
R3023	1-220-878-81	s	RES, CHIP 22 (1005)
R3024	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3102	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3103	1-208-863-81	s	RES, CHIP 100 (1005)
R3104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3106	1-208-863-81	s	RES, CHIP 100 (1005)
R3107	1-208-911-81	s	RES, CHIP 10K (1005)
R3108	1-208-911-81	s	RES, CHIP 10K (1005)
R3109	1-208-855-81	s	RES, CHIP 47 (1005)
R3110	1-208-855-81	s	RES, CHIP 47 (1005)
R3201	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3203	1-208-863-81	s	RES, CHIP 100 (1005)
R3204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3205	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3206	1-208-863-81	s	RES, CHIP 100 (1005)
R3207	1-208-911-81	s	RES, CHIP 10K (1005)
R3208	1-208-911-81	s	RES, CHIP 10K (1005)
R3209	1-208-855-81	s	RES, CHIP 47 (1005)
R3210	1-208-855-81	s	RES, CHIP 47 (1005)
R3301	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3303	1-208-863-81	s	RES, CHIP 100 (1005)
R3304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3305	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3306	1-208-863-81	s	RES, CHIP 100 (1005)
R3307	1-208-911-81	s	RES, CHIP 10K (1005)
R3308	1-208-911-81	s	RES, CHIP 10K (1005)
R3309	1-208-855-81	s	RES, CHIP 47 (1005)
R3310	1-208-855-81	s	RES, CHIP 47 (1005)
R3401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3403	1-208-863-81	s	RES, CHIP 100 (1005)
R3404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3405	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3406	1-208-863-81	s	RES, CHIP 100 (1005)
R3407	1-208-911-81	s	RES, CHIP 10K (1005)
R3408	1-208-911-81	s	RES, CHIP 10K (1005)
R3409	1-208-855-81	s	RES, CHIP 47 (1005)
R3410	1-208-855-81	s	RES, CHIP 47 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3503	1-208-911-81	s	RES, CHIP 10K (1005)
R3507	1-208-911-81	s	RES, CHIP 10K (1005)
R3510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3521	1-208-863-81	s	RES, CHIP 100 (1005)
R3522	1-208-863-81	s	RES, CHIP 100 (1005)
R3523	1-208-911-81	s	RES, CHIP 10K (1005)
R3524	1-208-911-81	s	RES, CHIP 10K (1005)
R3525	1-208-855-81	s	RES, CHIP 47 (1005)
R3526	1-208-855-81	s	RES, CHIP 47 (1005)
R3527	1-208-855-81	s	RES, CHIP 47 (1005)
R3528	1-208-855-81	s	RES, CHIP 47 (1005)
R3529	1-208-855-81	s	RES, CHIP 47 (1005)
R3530	1-208-855-81	s	RES, CHIP 47 (1005)
R3531	1-208-855-81	s	RES, CHIP 47 (1005)
R3532	1-208-855-81	s	RES, CHIP 47 (1005)
R3533	1-208-855-81	s	RES, CHIP 47 (1005)
R3534	1-208-855-81	s	RES, CHIP 47 (1005)
R3535	1-208-855-81	s	RES, CHIP 47 (1005)
R3536	1-208-855-81	s	RES, CHIP 47 (1005)
R3538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3539	1-208-855-81	s	RES, CHIP 47 (1005)
R3540	1-208-855-81	s	RES, CHIP 47 (1005)
R3601	1-208-911-81	s	RES, CHIP 10K (1005)
R3603	1-208-911-81	s	RES, CHIP 10K (1005)
R3607	1-208-911-81	s	RES, CHIP 10K (1005)
R3610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3617	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3619	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3620	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3621	1-208-863-81	s	RES, CHIP 100 (1005)
R3622	1-208-863-81	s	RES, CHIP 100 (1005)
R3623	1-208-911-81	s	RES, CHIP 10K (1005)
R3624	1-208-911-81	s	RES, CHIP 10K (1005)
R3625	1-208-855-81	s	RES, CHIP 47 (1005)
R3626	1-208-855-81	s	RES, CHIP 47 (1005)
R3627	1-208-855-81	s	RES, CHIP 47 (1005)
R3628	1-208-855-81	s	RES, CHIP 47 (1005)
R3629	1-208-855-81	s	RES, CHIP 47 (1005)
R3630	1-208-855-81	s	RES, CHIP 47 (1005)
R3631	1-208-855-81	s	RES, CHIP 47 (1005)
R3632	1-208-855-81	s	RES, CHIP 47 (1005)
R3633	1-208-855-81	s	RES, CHIP 47 (1005)
R3634	1-208-855-81	s	RES, CHIP 47 (1005)
R3635	1-208-855-81	s	RES, CHIP 47 (1005)
R3636	1-208-855-81	s	RES, CHIP 47 (1005)
R3638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3639	1-208-855-81	s	RES, CHIP 47 (1005)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3640	1-208-855-81	s	RES, CHIP 47 (1005)
R3701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3705	1-208-863-81	s	RES, CHIP 100 (1005)
R3706	1-208-863-81	s	RES, CHIP 100 (1005)
R3707	1-208-863-81	s	RES, CHIP 100 (1005)
R3801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3805	1-208-863-81	s	RES, CHIP 100 (1005)
R3806	1-208-863-81	s	RES, CHIP 100 (1005)
R3807	1-208-863-81	s	RES, CHIP 100 (1005)
R3901	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3902	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3903	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3905	1-208-863-81	s	RES, CHIP 100 (1005)
R3906	1-208-863-81	s	RES, CHIP 100 (1005)
R3907	1-208-863-81	s	RES, CHIP 100 (1005)
R4001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4005	1-208-863-81	s	RES, CHIP 100 (1005)
R4006	1-208-863-81	s	RES, CHIP 100 (1005)
R4007	1-208-863-81	s	RES, CHIP 100 (1005)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB903	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB904	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB905	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB915	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB916	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB918	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB919	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB920	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB921	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB922	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB923	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB924	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB925	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB926	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB927	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB928	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB929	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB930	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB931	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB932	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB933	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB934	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB935	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB936	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB937	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB938	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB939	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB940	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB941	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB942	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB943	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB944	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1001	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1002	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1003	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1301	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1302	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1303	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1304	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1305	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1306	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1512	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1515	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1516	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1600	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1700	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1702	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1703	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1704	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1705	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1706	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1707	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1709	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1710	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1711	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1712	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1713	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1714	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1715	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1716	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1800	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1801	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1802	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1803	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1804	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1805	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1806	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1807	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1900	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1901	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1911	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1913	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1914	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1915	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1916	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2000	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2001	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2002	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2003	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2114	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2115	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2116	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2200	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2201	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2300	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2306	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2307	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2308	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2309	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2310	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2311	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2312	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2313	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2314	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2315	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2316	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2512	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2515	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2516	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2600	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2700	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2702	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2703	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2704	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2705	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2706	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2707	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2709	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2710	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2711	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2712	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2713	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2714	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2715	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2716	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2800	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2801	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2802	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2803	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2804	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2805	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2806	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2807	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2900	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2901	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2911	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2913	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2914	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2915	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2916	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3000	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3001	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3002	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3003	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S601	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER

(FC-112 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP403	1-535-877-22	s	CHIP, CHECKER
TP404	1-535-877-22	s	CHIP, CHECKER
TP405	1-535-877-22	s	CHIP, CHECKER
TP406	1-535-877-22	s	CHIP, CHECKER
TP407	1-535-877-22	s	CHIP, CHECKER
TP408	1-535-877-22	s	CHIP, CHECKER
TP409	1-535-877-22	s	CHIP, CHECKER
TP410	1-535-877-22	s	CHIP, CHECKER
TP411	1-535-877-22	s	CHIP, CHECKER
TP412	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
TP602	1-535-877-22	s	CHIP, CHECKER
TP603	1-535-877-22	s	CHIP, CHECKER
TP604	1-535-877-22	s	CHIP, CHECKER
TP605	1-535-877-22	s	CHIP, CHECKER
TP606	1-535-877-22	s	CHIP, CHECKER
TP607	1-535-877-22	s	CHIP, CHECKER
TP608	1-535-877-22	s	CHIP, CHECKER
TP609	1-535-877-22	s	CHIP, CHECKER
TP610	1-535-877-22	s	CHIP, CHECKER
TP611	1-535-877-22	s	CHIP, CHECKER
TP612	1-535-877-22	s	CHIP, CHECKER
TP613	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1002	1-535-877-22	s	CHIP, CHECKER
X601	1-813-488-11	s	OSCILLATOR, CRYSTAL
X602	1-795-983-11	s	OSCILLATOR, CRYSTAL
X701	1-795-677-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

HN-364 BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1730-158-A	s	MOUNTED CIRCUIT BOARD, HN-364
C1	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C2	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C9	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C10	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
CN21	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN22	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN23	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN24	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN25	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB5	1-400-382-21	s	EMI FERRITE (SMD) (1608)
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC5	1-218-990-81	s	CONDUCTOR, CHIP (1005)

HN-364 BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1730-158-A	s	MOUNTED CIRCUIT BOARD, HN-364
C1	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C2	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C9	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C10	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
CN21	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN22	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN23	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN24	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN25	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB5	1-400-382-21	s	EMI FERRITE (SMD) (1608)
JC1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
JC5	1-218-990-81	s	CONDUCTOR, CHIP (1005)

HN-365 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1730-159-A	s	MOUNTED CIRCUIT BOARD, HN-365
C1	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C2	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
CN1	1-764-099-21	s	PIN, CONNECTOR (PC BOARD) 14P

HN-366 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1730-160-A	s	MOUNTED CIRCUIT BOARD, HN-366
CN2	1-764-087-21	s	PIN, CONNECTOR (PC BOARD) 14P
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)

MB-1150 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1707-413-A	s	MOUNTED CIRCUIT BOARD, MB-1150

MB-1151 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1797-428-A	s	MOUNTED CIRCUIT BOARD, MB-1151

MIX-53 BOARD (SUFFIX 13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
17pcs	4-143-557-01	s	SPRING, COMPRESSION
17pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
5pcs	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	4-187-619-01	s	SHEET,RADIATION(25X25X2)
6pcs	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
1pc	7-626-320-61	s	PIN, SPRING 3X18
4pcs	7-682-549-09	s	SCREW +B 3X10
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C101	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C234	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C235	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C236	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C237	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C238	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C239	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C241	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C242	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C243	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C244	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C245	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C246	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C247	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C248	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C249	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C250	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C251	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C252	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C253	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C254	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C255	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C256	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C257	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C258	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C259	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C260	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C261	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C262	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C263	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C264	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C265	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C266	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C267	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C268	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C269	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C270	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C271	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C272	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C273	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C274	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C275	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C276	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C277	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C278	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C279	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C280	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C281	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C282	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C283	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C284	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C285	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C286	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C287	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C288	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C289	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C290	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C291	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C292	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C293	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C294	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C295	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C296	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C297	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C298	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C299	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C300	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C301	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C302	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C303	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C304	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C305	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C306	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C412	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C417	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C420	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C426	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C427	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C429	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C430	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C440	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C441	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C442	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C443	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C446	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C509	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C514	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C518	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C520	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C522	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C524	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C528	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C530	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C533	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C534	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C710	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C712	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C713	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C714	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C715	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C716	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1010	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1011	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1012	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1013	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1014	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1015	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1016	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C1038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1151	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1153	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1156	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1157	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1158	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1160	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1165	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1404	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1409	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1901	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1902	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1903	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1904	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1905	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1906	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1907	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1908	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1909	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1910	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1911	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1912	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1913	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1914	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1915	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1916	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1917	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1918	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1919	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1920	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1921	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1922	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1923	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1924	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1925	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1926	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1927	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1928	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1929	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1930	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1931	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1932	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1933	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1934	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1935	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1936	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1937	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1938	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1939	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1940	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1941	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1942	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1943	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1944	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1945	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1946	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1947	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1948	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1949	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1950	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1951	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1952	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1953	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1954	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1955	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1956	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1957	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1958	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1959	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1960	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1961	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1962	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1963	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1964	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1965	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1966	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1967	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1968	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1969	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1970	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1971	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1972	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1973	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1974	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1975	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1976	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1977	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1978	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1979	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1980	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1981	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1982	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1983	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1984	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1985	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1986	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1987	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1988	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1989	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1990	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1991	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1992	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1993	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1994	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1995	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1996	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2026	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2028	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2032	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2054	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2059	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2062	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2065	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2066	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2067	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2069	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2071	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2075	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2079	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2083	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2085	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2086	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2087	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2088	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2109	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2110	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2111	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2112	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2113	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2114	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2118	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2119	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2120	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2121	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2122	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2123	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2124	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2133	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2134	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2135	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2136	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2139	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2140	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2141	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2142	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2143	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2144	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2145	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2146	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2147	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2148	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2701	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2702	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2703	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2704	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2705	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2706	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2707	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2708	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2711	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2713	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2714	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2715	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2716	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2717	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2718	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2719	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2720	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2721	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2722	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2723	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2724	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2725	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2726	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2727	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2729	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2730	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2732	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2733	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2734	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2735	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2736	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2737	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2738	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2833	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2842	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2927	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3018	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3033	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3042	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3135	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3233	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3242	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3335	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3430	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3432	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3442	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3535	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3618	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3627	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3631	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3632	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3633	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3634	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3636	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3642	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3735	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3803	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3804	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3805	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3806	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3807	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3808	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3809	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3810	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3811	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3812	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3813	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3814	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3817	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3818	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3819	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3820	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3835	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3837	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3839	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3841	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3843	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3845	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3847	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3849	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3851	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3853	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3855	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3857	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3859	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3861	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3862	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3863	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3865	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3867	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3868	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3869	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3870	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3872	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3874	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3876	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3877	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3879	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3881	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3882	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3883	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3885	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3887	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3889	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3891	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3893	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3894	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3901	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3902	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3903	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3904	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3905	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3906	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3907	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3908	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3909	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3910	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3911	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3912	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3913	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3914	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3915	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3916	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3917	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3918	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3919	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3920	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3927	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3935	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3937	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3945	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3947	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3950	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3957	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3962	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3965	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3967	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3969	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3970	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3972	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3974	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3975	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3976	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3977	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C3978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3979	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3981	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3983	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3987	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3989	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3991	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3993	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3994	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4002	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4003	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4004	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4005	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4006	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4007	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4008	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4009	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4010	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4011	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4012	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4013	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4014	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4015	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4016	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4017	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4018	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4019	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4020	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4059	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4062	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4065	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4067	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4068	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4069	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4073	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4078	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4079	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4083	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4084	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4085	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4087	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4089	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4101	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4102	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4103	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4104	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4105	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4106	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4107	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4108	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4109	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4110	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4111	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4112	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4113	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4114	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4115	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4116	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4117	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4118	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4119	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4120	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4137	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4147	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4149	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4150	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4151	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4153	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4157	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4162	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4165	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4167	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4169	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4170	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4172	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4176	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4177	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4191	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4193	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4201	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4202	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4203	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4204	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4205	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4206	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4207	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4208	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4209	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4210	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4211	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4212	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4213	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4214	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4215	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4216	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4217	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4218	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4219	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4220	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4255	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4257	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4262	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4267	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4269	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4271	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4276	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4281	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4282	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4283	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4284	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4285	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4286	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4287	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4289	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4291	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4293	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4341	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4343	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4373	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4385	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4386	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4387	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4388	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4390	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4391	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4393	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4394	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4396	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4397	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4403	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4435	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4438	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4446	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4447	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4449	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4450	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4452	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4453	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4454	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4455	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4456	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4457	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4458	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4459	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4460	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4461	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4462	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4463	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4464	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4465	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4466	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4467	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4468	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4469	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4470	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4471	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4472	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4474	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4476	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4478	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4480	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4484	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4485	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4486	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4487	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4488	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4489	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4490	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4491	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4492	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4493	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4494	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4541	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4546	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4560	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4567	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4569	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4571	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4572	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4573	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4577	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4578	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4579	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4581	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4583	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4584	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4585	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4586	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4587	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4588	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4589	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4590	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4591	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4592	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4593	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4594	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4595	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4596	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4597	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4598	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4599	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4603	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4615	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4616	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4626	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4628	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4632	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4634	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4635	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4638	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4641	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4643	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4644	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4645	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4646	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4647	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4649	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4650	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4651	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4652	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4653	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4654	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4655	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4656	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4657	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4658	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4659	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4660	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4661	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4662	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4663	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4664	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4665	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4666	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4667	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4668	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4669	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4670	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4671	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4672	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4673	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4674	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4675	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4676	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4677	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4678	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4679	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4680	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4681	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4682	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4683	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4685	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4686	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4689	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4690	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4691	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4692	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4693	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4694	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4702	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4747	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4748	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4749	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4757	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4761	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4766	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4768	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4770	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4771	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4774	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4777	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4780	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4782	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4785	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4788	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4789	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4793	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4796	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4797	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4799	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4810	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4824	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4841	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4847	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4848	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4850	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4853	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4854	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4858	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4861	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4862	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4865	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4868	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4873	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4878	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4882	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4883	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4884	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4886	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4887	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4888	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4889	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4891	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4893	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4894	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4895	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4896	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4897	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4898	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4899	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4908	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4909	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4910	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4912	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4913	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4914	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4915	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4916	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4917	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4918	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4919	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4920	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4921	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4922	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4924	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4925	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4926	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4927	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4928	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4929	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4930	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C4931	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4932	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4933	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4934	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4935	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4936	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4937	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4938	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4940	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4942	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4945	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4947	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4961	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4969	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4970	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5032	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5062	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5065	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5066	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5067	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5069	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5071	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5074	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5079	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5083	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5085	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5087	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5088	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5089	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5095	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5096	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5097	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5098	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5099	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5100	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5103	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5115	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5135	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5137	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5138	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5147	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5149	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5150	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5151	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5152	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5153	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5154	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5155	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5156	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5157	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5158	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5159	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5161	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5162	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5163	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5164	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5165	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5166	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5167	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5168	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5169	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5170	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5171	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5172	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5173	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5176	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5177	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5178	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5180	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5182	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5187	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5189	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5195	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5196	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5197	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5198	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5199	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5201	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C5202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5224	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5225	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5243	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5257	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5260	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5263	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5264	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5267	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5269	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5271	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5275	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5280	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5281	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5286	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5287	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5288	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5289	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5290	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5291	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5292	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5293	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5294	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5295	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5296	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5297	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5299	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5318	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5325	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5401	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C5402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5424	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5425	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5443	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5459	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5461	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5465	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5467	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5468	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5469	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5470	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5471	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5472	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5474	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5476	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5480	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5481	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5483	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5485	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5486	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5487	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5488	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5489	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5490	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5491	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5492	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5493	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5494	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C5495	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5496	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5497	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5498	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5499	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5518	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5525	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5528	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
CN901	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN902	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN1001	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN1801	1-770-627-21	s	PIN, CONNECTOR 10P
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D308	6-502-197-01	s	DI SML-D12M8WT86SM
D309	6-502-197-01	s	DI SML-D12M8WT86SM
D310	6-502-197-01	s	DI SML-D12M8WT86SM
D311	6-502-197-01	s	DI SML-D12M8WT86SM
D403	8-719-069-28	s	DI 1SS400FJTE61
D404	8-719-069-28	s	DI 1SS400FJTE61
D407	8-719-069-28	s	DI 1SS400FJTE61
D408	8-719-069-28	s	DI 1SS400FJTE61
D409	8-719-069-28	s	DI 1SS400FJTE61
D410	8-719-069-28	s	DI 1SS400FJTE61
D414	6-502-197-01	s	DI SML-D12M8WT86SM
D415	6-502-197-01	s	DI SML-D12M8WT86SM
D416	6-502-197-01	s	DI SML-D12M8WT86SM
D417	6-502-197-01	s	DI SML-D12M8WT86SM
D418	6-502-197-01	s	DI SML-D12M8WT86SM
D419	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-598-01	s	DI SML-D12U8WT86
D701	6-502-598-01	s	DI SML-D12U8WT86
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D705	6-502-197-01	s	DI SML-D12M8WT86SM
D706	6-502-197-01	s	DI SML-D12M8WT86SM
D707	6-502-197-01	s	DI SML-D12M8WT86SM
D708	6-502-197-01	s	DI SML-D12M8WT86SM
D709	6-502-197-01	s	DI SML-D12M8WT86SM
D710	6-502-197-01	s	DI SML-D12M8WT86SM
D711	6-502-197-01	s	DI SML-D12M8WT86SM
D712	6-502-197-01	s	DI SML-D12M8WT86SM
D713	6-502-197-01	s	DI SML-D12M8WT86SM
D714	6-502-197-01	s	DI SML-D12M8WT86SM
D715	6-502-197-01	s	DI SML-D12M8WT86SM
D716	6-502-197-01	s	DI SML-D12M8WT86SM
D717	6-502-197-01	s	DI SML-D12M8WT86SM
D718	6-502-352-01	s	DI SML-522MU8WT86PQ
D719	6-502-352-01	s	DI SML-522MU8WT86PQ
D720	6-502-598-01	s	DI SML-D12U8WT86
D721	6-501-436-01	s	DIODE SML412BC6TT86
D1001	6-502-197-01	s	DI SML-D12M8WT86SM
D1002	6-502-197-01	s	DI SML-D12M8WT86SM
D1401	6-502-598-01	s	DI SML-D12U8WT86
D1402	6-502-598-01	s	DI SML-D12U8WT86
D1403	6-502-598-01	s	DI SML-D12U8WT86
D1404	6-502-598-01	s	DI SML-D12U8WT86
D1405	6-502-598-01	s	DI SML-D12U8WT86
D1406	6-502-598-01	s	DI SML-D12U8WT86
D1407	6-502-598-01	s	DI SML-D12U8WT86
D1408	6-502-598-01	s	DI SML-D12U8WT86
D1409	6-502-598-01	s	DI SML-D12U8WT86
D1410	6-502-598-01	s	DI SML-D12U8WT86
D1411	6-502-598-01	s	DI SML-D12U8WT86
D1412	6-502-598-01	s	DI SML-D12U8WT86
D1413	6-502-598-01	s	DI SML-D12U8WT86
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
DD207	1-487-092-11	s	DC-DC CONVERTER
DD208	1-487-092-11	s	DC-DC CONVERTER
DD209	1-487-092-11	s	DC-DC CONVERTER
DD210	1-487-092-11	s	DC-DC CONVERTER
DD211	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
E22	1-535-877-22	s	CHIP, CHECKER
E23	1-535-877-22	s	CHIP, CHECKER
E24	1-535-877-22	s	CHIP, CHECKER
E25	1-535-877-22	s	CHIP, CHECKER
E26	1-535-877-22	s	CHIP, CHECKER
E27	1-535-877-22	s	CHIP, CHECKER
E28	1-535-877-22	s	CHIP, CHECKER
E29	1-535-877-22	s	CHIP, CHECKER
E30	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F207	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F208	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F209	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F210	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F211	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F212	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB903	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2001	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2002	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2003	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2004	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2005	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2006	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2007	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2008	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
FB3901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4301	1-400-580-21	s	FERRITE, EMI (SMD)
FB4302	1-400-580-21	s	FERRITE, EMI (SMD)
FB4303	1-400-580-21	s	FERRITE, EMI (SMD)
FB4501	1-400-580-21	s	FERRITE, EMI (SMD)
FB4502	1-400-580-21	s	FERRITE, EMI (SMD)
FB4503	1-400-580-21	s	FERRITE, EMI (SMD)
FB4701	1-400-580-21	s	FERRITE, EMI (SMD)
FB4702	1-400-580-21	s	FERRITE, EMI (SMD)
FB4703	1-400-580-21	s	FERRITE, EMI (SMD)
FB5001	1-400-580-21	s	FERRITE, EMI (SMD)
FB5002	1-400-580-21	s	FERRITE, EMI (SMD)
FB5003	1-400-580-21	s	FERRITE, EMI (SMD)
FB5201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC301	8-759-338-95	s	IC NJM2903V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC305	8-759-338-95	s	IC NJM2903V(TE2)
IC306	8-759-338-95	s	IC NJM2903V(TE2)
IC501	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC502	6-708-324-01	s	IC R3112N301A-TR-FA
IC503	6-714-109-01	s	IC LMK03000CISQ
IC504	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC505	6-714-616-11	s	IC DS90LV110ATMTX
IC506	6-714-616-11	s	IC DS90LV110ATMTX
IC507	6-714-616-11	s	IC DS90LV110ATMTX
IC701	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC901	6-705-514-01	s	IC MAX3222IPWR
IC902	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1001	6-710-018-01	s	IC CAT24C02WI-GT3
IC1002	6-714-192-01	s	IC ADT75BRMZ-REEL
IC1003	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1004	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1005	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1006	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1101	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1102	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1103	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1104	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1105	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1106	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1107	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1151	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1152	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1153	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1154	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1201	6-714-463-01	s	IC M29W256GL70N6E
IC1203	6-714-463-01	s	IC M29W256GL70N6E
IC1204	6-714-463-01	s	IC M29W256GL70N6E
IC1205	6-714-463-01	s	IC M29W256GL70N6E
IC1601	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1701	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1702	6-707-850-01	s	IC TC74LCX245FT(EKJ)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
IC1703	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1704	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1705	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1801	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1802	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1803	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC2803	8-759-388-62	s	IC NJU7062M(TE2)
IC3003	8-759-388-62	s	IC NJU7062M(TE2)
IC3203	8-759-388-62	s	IC NJU7062M(TE2)
IC3403	8-759-388-62	s	IC NJU7062M(TE2)
IC3603	8-759-388-62	s	IC NJU7062M(TE2)
IC4301	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4501	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4701	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5001	6-706-224-01	s	IC ADM1032ARMZ-R7
L401	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L402	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L501	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3801	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3802	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3803	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3804	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3805	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3806	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3807	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3808	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3809	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3810	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3811	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3812	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3813	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3814	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3815	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3816	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3817	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3818	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3909	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3910	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3911	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3912	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3913	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3914	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3915	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3916	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3917	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3918	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
L4006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4009	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4010	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4011	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4012	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4013	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4014	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4015	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4016	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4017	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4018	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4105	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4106	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4109	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4110	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4111	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4112	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4113	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4114	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4115	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4116	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4117	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4118	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4208	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4209	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4210	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4211	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4212	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4213	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4214	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4215	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4216	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4217	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4218	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
L4503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4505	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4506	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4507	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4508	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4707	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4708	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4709	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4710	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4711	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4712	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q312	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q313	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q314	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q315	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q316	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q317	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q318	8-729-929-09	s	TRANSISTOR DTC123JE-TL

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
Q319	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q320	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q321	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q322	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q409	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q410	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q411	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q412	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q413	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q414	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q415	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-218-985-11	s	RES, CHIP 470K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-715-11	s	RES, CHIP 22K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-715-11	s	RES, CHIP 22K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R226	1-208-935-81	s	RES, CHIP 100K (1005)
R227	1-208-935-81	s	RES, CHIP 100K (1005)
R228	1-208-943-81	s	RES, CHIP 220K (1005)
R229	1-208-935-81	s	RES, CHIP 100K (1005)
R230	1-208-943-81	s	RES, CHIP 220K (1005)
R231	1-208-903-81	s	RES, CHIP 4.7K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R233	1-208-903-81	s	RES, CHIP 4.7K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R236	1-208-927-81	s	RES, CHIP 47K (1005)
R237	1-208-927-81	s	RES, CHIP 47K (1005)
R238	1-208-927-81	s	RES, CHIP 47K (1005)
R239	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-715-11	s	RES, CHIP 22K (1005)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R247	1-208-935-81	s	RES, CHIP 100K (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-208-943-81	s	RES, CHIP 220K (1005)
R253	1-208-895-81	s	RES, CHIP 2.2K (1005)
R254	1-208-911-81	s	RES, CHIP 10K (1005)
R255	1-208-903-81	s	RES, CHIP 4.7K (1005)
R256	1-208-903-81	s	RES, CHIP 4.7K (1005)
R257	1-208-903-81	s	RES, CHIP 4.7K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-927-81	s	RES, CHIP 47K (1005)
R260	1-208-715-11	s	RES, CHIP 22K (1005)
R262	1-208-715-11	s	RES, CHIP 22K (1005)
R263	1-208-879-81	s	RES, CHIP 470 (1005)
R264	1-208-903-81	s	RES, CHIP 4.7K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-715-11	s	RES, CHIP 22K (1005)
R268	1-208-935-81	s	RES, CHIP 100K (1005)
R269	1-208-943-81	s	RES, CHIP 220K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-935-81	s	RES, CHIP 100K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R332	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-895-81	s	RES, CHIP 2.2K (1005)
R334	1-208-911-81	s	RES, CHIP 10K (1005)
R335	1-208-911-81	s	RES, CHIP 10K (1005)
R336	1-208-935-81	s	RES, CHIP 100K (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-903-81	s	RES, CHIP 4.7K (1005)
R339	1-208-895-81	s	RES, CHIP 2.2K (1005)
R340	1-208-903-81	s	RES, CHIP 4.7K (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-935-81	s	RES, CHIP 100K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R347	1-208-887-81	s	RES, CHIP 1.0K (1005)
R349	1-208-911-81	s	RES, CHIP 10K (1005)
R350	1-208-935-81	s	RES, CHIP 100K (1005)
R351	1-208-911-81	s	RES, CHIP 10K (1005)
R352	1-208-903-81	s	RES, CHIP 4.7K (1005)
R353	1-208-895-81	s	RES, CHIP 2.2K (1005)
R354	1-208-715-11	s	RES, CHIP 22K (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R356	1-208-935-81	s	RES, CHIP 100K (1005)
R357	1-208-911-81	s	RES, CHIP 10K (1005)
R358	1-208-903-81	s	RES, CHIP 4.7K (1005)
R359	1-208-895-81	s	RES, CHIP 2.2K (1005)
R360	1-208-887-81	s	RES, CHIP 1.0K (1005)
R361	1-208-911-81	s	RES, CHIP 10K (1005)
R362	1-208-935-81	s	RES, CHIP 100K (1005)
R363	1-208-911-81	s	RES, CHIP 10K (1005)
R364	1-208-903-81	s	RES, CHIP 4.7K (1005)
R365	1-208-895-81	s	RES, CHIP 2.2K (1005)
R366	1-208-887-81	s	RES, CHIP 1.0K (1005)
R367	1-208-935-81	s	RES, CHIP 100K (1005)
R368	1-208-911-81	s	RES, CHIP 10K (1005)
R369	1-208-911-81	s	RES, CHIP 10K (1005)
R370	1-208-903-81	s	RES, CHIP 4.7K (1005)
R371	1-208-895-81	s	RES, CHIP 2.2K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R415	1-208-715-11	s	RES, CHIP 22K (1005)
R416	1-208-715-11	s	RES, CHIP 22K (1005)
R418	1-208-903-81	s	RES, CHIP 4.7K (1005)
R419	1-208-903-81	s	RES, CHIP 4.7K (1005)
R421	1-208-903-81	s	RES, CHIP 4.7K (1005)
R422	1-208-903-81	s	RES, CHIP 4.7K (1005)
R427	1-208-911-81	s	RES, CHIP 10K (1005)
R428	1-208-911-81	s	RES, CHIP 10K (1005)
R430	1-208-887-81	s	RES, CHIP 1.0K (1005)
R431	1-208-887-81	s	RES, CHIP 1.0K (1005)
R432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R433	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)
R438	1-208-903-81	s	RES, CHIP 4.7K (1005)
R439	1-208-903-81	s	RES, CHIP 4.7K (1005)
R440	1-208-903-81	s	RES, CHIP 4.7K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-887-81	s	RES, CHIP 1.0K (1005)
R446	1-208-887-81	s	RES, CHIP 1.0K (1005)
R447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R455	1-208-903-81	s	RES, CHIP 4.7K (1005)
R456	1-208-903-81	s	RES, CHIP 4.7K (1005)
R464	1-208-887-81	s	RES, CHIP 1.0K (1005)
R465	1-208-887-81	s	RES, CHIP 1.0K (1005)
R466	1-208-887-81	s	RES, CHIP 1.0K (1005)
R467	1-208-887-81	s	RES, CHIP 1.0K (1005)
R468	1-208-887-81	s	RES, CHIP 1.0K (1005)
R469	1-208-887-81	s	RES, CHIP 1.0K (1005)
R470	1-208-911-81	s	RES, CHIP 10K (1005)
R471	1-208-911-81	s	RES, CHIP 10K (1005)
R472	1-208-911-81	s	RES, CHIP 10K (1005)
R473	1-208-911-81	s	RES, CHIP 10K (1005)
R474	1-208-911-81	s	RES, CHIP 10K (1005)
R475	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-903-81	s	RES, CHIP 4.7K (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-208-927-81	s	RES, CHIP 47K (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-825-91	s	RES, CHIP 120 (1608)
R525	1-218-825-91	s	RES, CHIP 120 (1608)
R526	1-208-895-81	s	RES, CHIP 2.2K (1005)
R527	1-218-825-91	s	RES, CHIP 120 (1608)
R528	1-208-911-81	s	RES, CHIP 10K (1005)
R529	1-220-878-81	s	RES, CHIP 22 (1005)
R530	1-220-878-81	s	RES, CHIP 22 (1005)
R531	1-220-878-81	s	RES, CHIP 22 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-218-825-91	s	RES, CHIP 120 (1608)
R538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R539	1-208-887-81	s	RES, CHIP 1.0K (1005)
R540	1-218-825-91	s	RES, CHIP 120 (1608)
R541	1-218-825-91	s	RES, CHIP 120 (1608)
R547	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-208-863-81	s	RES, CHIP 100 (1005)
R549	1-208-863-81	s	RES, CHIP 100 (1005)
R550	1-208-903-81	s	RES, CHIP 4.7K (1005)
R551	1-208-903-81	s	RES, CHIP 4.7K (1005)
R552	1-208-903-81	s	RES, CHIP 4.7K (1005)
R553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R567	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R614	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-220-878-81	s	RES, CHIP 22 (1005)
R616	1-220-878-81	s	RES, CHIP 22 (1005)
R617	1-220-878-81	s	RES, CHIP 22 (1005)
R618	1-220-878-81	s	RES, CHIP 22 (1005)
R619	1-220-878-81	s	RES, CHIP 22 (1005)
R620	1-220-878-81	s	RES, CHIP 22 (1005)
R621	1-220-878-81	s	RES, CHIP 22 (1005)
R622	1-220-878-81	s	RES, CHIP 22 (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R625	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-220-878-81	s	RES, CHIP 22 (1005)
R627	1-208-887-81	s	RES, CHIP 1.0K (1005)
R628	1-208-863-81	s	RES, CHIP 100 (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R630	1-208-863-81	s	RES, CHIP 100 (1005)
R631	1-208-863-81	s	RES, CHIP 100 (1005)
R638	1-220-878-81	s	RES, CHIP 22 (1005)
R639	1-220-878-81	s	RES, CHIP 22 (1005)
R640	1-220-878-81	s	RES, CHIP 22 (1005)
R641	1-220-878-81	s	RES, CHIP 22 (1005)
R642	1-220-878-81	s	RES, CHIP 22 (1005)
R643	1-220-878-81	s	RES, CHIP 22 (1005)
R644	1-220-878-81	s	RES, CHIP 22 (1005)
R645	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R646	1-220-878-81	s	RES, CHIP 22 (1005)
R647	1-220-878-81	s	RES, CHIP 22 (1005)
R648	1-220-878-81	s	RES, CHIP 22 (1005)
R649	1-220-878-81	s	RES, CHIP 22 (1005)
R650	1-220-878-81	s	RES, CHIP 22 (1005)
R651	1-220-878-81	s	RES, CHIP 22 (1005)
R652	1-220-878-81	s	RES, CHIP 22 (1005)
R653	1-220-878-81	s	RES, CHIP 22 (1005)
R654	1-220-878-81	s	RES, CHIP 22 (1005)
R655	1-220-878-81	s	RES, CHIP 22 (1005)
R656	1-220-878-81	s	RES, CHIP 22 (1005)
R657	1-220-878-81	s	RES, CHIP 22 (1005)
R658	1-220-878-81	s	RES, CHIP 22 (1005)
R659	1-208-887-81	s	RES, CHIP 1.0K (1005)
R660	1-208-887-81	s	RES, CHIP 1.0K (1005)
R661	1-208-887-81	s	RES, CHIP 1.0K (1005)
R662	1-208-863-81	s	RES, CHIP 100 (1005)
R663	1-208-863-81	s	RES, CHIP 100 (1005)
R664	1-208-863-81	s	RES, CHIP 100 (1005)
R665	1-208-863-81	s	RES, CHIP 100 (1005)
R666	1-208-863-81	s	RES, CHIP 100 (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)
R703	1-220-878-81	s	RES, CHIP 22 (1005)
R704	1-220-878-81	s	RES, CHIP 22 (1005)
R705	1-220-878-81	s	RES, CHIP 22 (1005)
R706	1-220-878-81	s	RES, CHIP 22 (1005)
R707	1-220-878-81	s	RES, CHIP 22 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R709	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-220-878-81	s	RES, CHIP 22 (1005)
R711	1-220-878-81	s	RES, CHIP 22 (1005)
R712	1-220-878-81	s	RES, CHIP 22 (1005)
R713	1-220-878-81	s	RES, CHIP 22 (1005)
R714	1-220-878-81	s	RES, CHIP 22 (1005)
R715	1-220-878-81	s	RES, CHIP 22 (1005)
R716	1-220-878-81	s	RES, CHIP 22 (1005)
R717	1-220-878-81	s	RES, CHIP 22 (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R719	1-220-878-81	s	RES, CHIP 22 (1005)
R720	1-220-878-81	s	RES, CHIP 22 (1005)
R721	1-220-878-81	s	RES, CHIP 22 (1005)
R722	1-220-878-81	s	RES, CHIP 22 (1005)
R723	1-220-878-81	s	RES, CHIP 22 (1005)
R724	1-220-878-81	s	RES, CHIP 22 (1005)
R725	1-220-878-81	s	RES, CHIP 22 (1005)
R726	1-220-878-81	s	RES, CHIP 22 (1005)
R727	1-220-878-81	s	RES, CHIP 22 (1005)
R728	1-220-878-81	s	RES, CHIP 22 (1005)
R729	1-220-878-81	s	RES, CHIP 22 (1005)
R730	1-220-878-81	s	RES, CHIP 22 (1005)
R731	1-220-878-81	s	RES, CHIP 22 (1005)
R732	1-220-878-81	s	RES, CHIP 22 (1005)
R733	1-220-878-81	s	RES, CHIP 22 (1005)
R734	1-220-878-81	s	RES, CHIP 22 (1005)
R735	1-220-878-81	s	RES, CHIP 22 (1005)
R736	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R737	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R738	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R739	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R740	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R742	1-208-911-81	s	RES, CHIP 10K (1005)
R743	1-208-911-81	s	RES, CHIP 10K (1005)
R744	1-208-911-81	s	RES, CHIP 10K (1005)
R745	1-208-911-81	s	RES, CHIP 10K (1005)
R746	1-208-911-81	s	RES, CHIP 10K (1005)
R747	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-911-81	s	RES, CHIP 10K (1005)
R749	1-208-911-81	s	RES, CHIP 10K (1005)
R750	1-208-911-81	s	RES, CHIP 10K (1005)
R751	1-208-911-81	s	RES, CHIP 10K (1005)
R752	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-911-81	s	RES, CHIP 10K (1005)
R754	1-208-911-81	s	RES, CHIP 10K (1005)
R755	1-208-911-81	s	RES, CHIP 10K (1005)
R756	1-208-911-81	s	RES, CHIP 10K (1005)
R757	1-208-911-81	s	RES, CHIP 10K (1005)
R758	1-208-911-81	s	RES, CHIP 10K (1005)
R760	1-220-878-81	s	RES, CHIP 22 (1005)
R761	1-208-911-81	s	RES, CHIP 10K (1005)
R762	1-208-911-81	s	RES, CHIP 10K (1005)
R763	1-208-911-81	s	RES, CHIP 10K (1005)
R764	1-208-911-81	s	RES, CHIP 10K (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-911-81	s	RES, CHIP 10K (1005)
R767	1-208-911-81	s	RES, CHIP 10K (1005)
R768	1-208-911-81	s	RES, CHIP 10K (1005)
R769	1-208-911-81	s	RES, CHIP 10K (1005)
R770	1-208-911-81	s	RES, CHIP 10K (1005)
R771	1-208-911-81	s	RES, CHIP 10K (1005)
R772	1-208-911-81	s	RES, CHIP 10K (1005)
R773	1-208-911-81	s	RES, CHIP 10K (1005)
R774	1-208-911-81	s	RES, CHIP 10K (1005)
R775	1-208-911-81	s	RES, CHIP 10K (1005)
R776	1-208-903-81	s	RES, CHIP 4.7K (1005)
R779	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R780	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R782	1-208-903-81	s	RES, CHIP 4.7K (1005)
R785	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R786	1-220-878-81	s	RES, CHIP 22 (1005)
R787	1-220-878-81	s	RES, CHIP 22 (1005)
R788	1-220-878-81	s	RES, CHIP 22 (1005)
R789	1-220-878-81	s	RES, CHIP 22 (1005)
R790	1-220-878-81	s	RES, CHIP 22 (1005)
R791	1-220-878-81	s	RES, CHIP 22 (1005)
R792	1-220-878-81	s	RES, CHIP 22 (1005)
R793	1-220-878-81	s	RES, CHIP 22 (1005)
R794	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R796	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R798	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-208-935-81	s	RES, CHIP 100K (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-208-935-81	s	RES, CHIP 100K (1005)
R806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R807	1-208-935-81	s	RES, CHIP 100K (1005)
R808	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R809	1-208-935-81	s	RES, CHIP 100K (1005)
R810	1-208-935-81	s	RES, CHIP 100K (1005)
R811	1-208-935-81	s	RES, CHIP 100K (1005)
R812	1-208-935-81	s	RES, CHIP 100K (1005)
R813	1-208-935-81	s	RES, CHIP 100K (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R815	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-208-671-11	s	RES, CHIP 330 (1005)
R817	1-208-911-81	s	RES, CHIP 10K (1005)
R818	1-208-911-81	s	RES, CHIP 10K (1005)
R819	1-208-887-81	s	RES, CHIP 1.0K (1005)
R820	1-208-911-81	s	RES, CHIP 10K (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R838	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-911-81	s	RES, CHIP 10K (1005)
R840	1-208-911-81	s	RES, CHIP 10K (1005)
R841	1-208-887-81	s	RES, CHIP 1.0K (1005)
R842	1-208-871-81	s	RES, CHIP 220 (1005)
R843	1-208-871-81	s	RES, CHIP 220 (1005)
R844	1-208-887-81	s	RES, CHIP 1.0K (1005)
R845	1-208-871-81	s	RES, CHIP 220 (1005)
R846	1-208-887-81	s	RES, CHIP 1.0K (1005)
R847	1-208-911-81	s	RES, CHIP 10K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R849	1-208-911-81	s	RES, CHIP 10K (1005)
R850	1-208-911-81	s	RES, CHIP 10K (1005)
R852	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R902	1-220-878-81	s	RES, CHIP 22 (1005)
R903	1-220-878-81	s	RES, CHIP 22 (1005)
R904	1-220-878-81	s	RES, CHIP 22 (1005)
R905	1-220-878-81	s	RES, CHIP 22 (1005)
R906	1-220-878-81	s	RES, CHIP 22 (1005)
R907	1-220-878-81	s	RES, CHIP 22 (1005)
R908	1-220-878-81	s	RES, CHIP 22 (1005)
R909	1-220-878-81	s	RES, CHIP 22 (1005)
R910	1-220-878-81	s	RES, CHIP 22 (1005)
R911	1-220-878-81	s	RES, CHIP 22 (1005)
R912	1-220-878-81	s	RES, CHIP 22 (1005)
R913	1-220-878-81	s	RES, CHIP 22 (1005)
R914	1-208-911-81	s	RES, CHIP 10K (1005)
R915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1001	1-208-855-81	s	RES, CHIP 47 (1005)
R1002	1-208-855-81	s	RES, CHIP 47 (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1003	1-208-855-81	s	RES, CHIP 47 (1005)
R1004	1-208-855-81	s	RES, CHIP 47 (1005)
R1005	1-208-855-81	s	RES, CHIP 47 (1005)
R1006	1-208-855-81	s	RES, CHIP 47 (1005)
R1007	1-208-855-81	s	RES, CHIP 47 (1005)
R1008	1-208-855-81	s	RES, CHIP 47 (1005)
R1009	1-208-855-81	s	RES, CHIP 47 (1005)
R1010	1-208-855-81	s	RES, CHIP 47 (1005)
R1011	1-208-855-81	s	RES, CHIP 47 (1005)
R1012	1-208-855-81	s	RES, CHIP 47 (1005)
R1013	1-208-855-81	s	RES, CHIP 47 (1005)
R1014	1-208-855-81	s	RES, CHIP 47 (1005)
R1015	1-208-855-81	s	RES, CHIP 47 (1005)
R1016	1-208-855-81	s	RES, CHIP 47 (1005)
R1017	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1018	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1019	1-208-860-81	s	RES, CHIP 75 (1005)
R1020	1-208-860-81	s	RES, CHIP 75 (1005)
R1021	1-208-860-81	s	RES, CHIP 75 (1005)
R1022	1-208-860-81	s	RES, CHIP 75 (1005)
R1023	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1024	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1027	1-208-935-81	s	RES, CHIP 100K (1005)
R1028	1-208-935-81	s	RES, CHIP 100K (1005)
R1029	1-208-911-81	s	RES, CHIP 10K (1005)
R1031	1-208-911-81	s	RES, CHIP 10K (1005)
R1034	1-208-911-81	s	RES, CHIP 10K (1005)
R1036	1-208-911-81	s	RES, CHIP 10K (1005)
R1038	1-208-911-81	s	RES, CHIP 10K (1005)
R1040	1-208-911-81	s	RES, CHIP 10K (1005)
R1041	1-208-879-81	s	RES, CHIP 470 (1005)
R1042	1-220-878-81	s	RES, CHIP 22 (1005)
R1043	1-220-878-81	s	RES, CHIP 22 (1005)
R1044	1-220-878-81	s	RES, CHIP 22 (1005)
R1045	1-220-878-81	s	RES, CHIP 22 (1005)
R1046	1-220-878-81	s	RES, CHIP 22 (1005)
R1047	1-220-878-81	s	RES, CHIP 22 (1005)
R1048	1-220-878-81	s	RES, CHIP 22 (1005)
R1049	1-220-878-81	s	RES, CHIP 22 (1005)
R1050	1-220-878-81	s	RES, CHIP 22 (1005)
R1051	1-220-878-81	s	RES, CHIP 22 (1005)
R1052	1-220-878-81	s	RES, CHIP 22 (1005)
R1053	1-220-878-81	s	RES, CHIP 22 (1005)
R1054	1-220-878-81	s	RES, CHIP 22 (1005)
R1055	1-220-878-81	s	RES, CHIP 22 (1005)
R1056	1-220-878-81	s	RES, CHIP 22 (1005)
R1057	1-220-878-81	s	RES, CHIP 22 (1005)
R1058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1061	1-220-878-81	s	RES, CHIP 22 (1005)
R1062	1-220-878-81	s	RES, CHIP 22 (1005)
R1063	1-220-878-81	s	RES, CHIP 22 (1005)
R1064	1-220-878-81	s	RES, CHIP 22 (1005)
R1065	1-220-878-81	s	RES, CHIP 22 (1005)
R1066	1-220-878-81	s	RES, CHIP 22 (1005)
R1067	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1068	1-220-878-81	s	RES, CHIP 22 (1005)
R1069	1-220-878-81	s	RES, CHIP 22 (1005)
R1070	1-220-878-81	s	RES, CHIP 22 (1005)
R1071	1-220-878-81	s	RES, CHIP 22 (1005)
R1072	1-220-878-81	s	RES, CHIP 22 (1005)
R1073	1-220-878-81	s	RES, CHIP 22 (1005)
R1074	1-220-878-81	s	RES, CHIP 22 (1005)
R1075	1-220-878-81	s	RES, CHIP 22 (1005)
R1076	1-220-878-81	s	RES, CHIP 22 (1005)
R1077	1-220-878-81	s	RES, CHIP 22 (1005)
R1078	1-220-878-81	s	RES, CHIP 22 (1005)
R1079	1-220-878-81	s	RES, CHIP 22 (1005)
R1080	1-220-878-81	s	RES, CHIP 22 (1005)
R1081	1-220-878-81	s	RES, CHIP 22 (1005)
R1082	1-220-878-81	s	RES, CHIP 22 (1005)
R1083	1-220-878-81	s	RES, CHIP 22 (1005)
R1084	1-220-878-81	s	RES, CHIP 22 (1005)
R1201	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-208-911-81	s	RES, CHIP 10K (1005)
R1204	1-208-911-81	s	RES, CHIP 10K (1005)
R1205	1-208-911-81	s	RES, CHIP 10K (1005)
R1206	1-208-911-81	s	RES, CHIP 10K (1005)
R1208	1-208-911-81	s	RES, CHIP 10K (1005)
R1215	1-208-911-81	s	RES, CHIP 10K (1005)
R1216	1-208-911-81	s	RES, CHIP 10K (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1222	1-208-911-81	s	RES, CHIP 10K (1005)
R1223	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-208-911-81	s	RES, CHIP 10K (1005)
R1230	1-208-911-81	s	RES, CHIP 10K (1005)
R1232	1-208-911-81	s	RES, CHIP 10K (1005)
R1236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1239	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1312	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1404	1-220-878-81	s	RES, CHIP 22 (1005)
R1405	1-220-878-81	s	RES, CHIP 22 (1005)
R1406	1-220-878-81	s	RES, CHIP 22 (1005)
R1407	1-220-878-81	s	RES, CHIP 22 (1005)
R1408	1-220-878-81	s	RES, CHIP 22 (1005)
R1409	1-220-878-81	s	RES, CHIP 22 (1005)
R1410	1-208-911-81	s	RES, CHIP 10K (1005)
R1411	1-208-911-81	s	RES, CHIP 10K (1005)
R1412	1-208-911-81	s	RES, CHIP 10K (1005)
R1413	1-208-911-81	s	RES, CHIP 10K (1005)
R1414	1-208-911-81	s	RES, CHIP 10K (1005)
R1415	1-208-911-81	s	RES, CHIP 10K (1005)
R1416	1-208-911-81	s	RES, CHIP 10K (1005)
R1417	1-208-911-81	s	RES, CHIP 10K (1005)
R1418	1-208-911-81	s	RES, CHIP 10K (1005)
R1419	1-208-911-81	s	RES, CHIP 10K (1005)
R1420	1-208-911-81	s	RES, CHIP 10K (1005)
R1421	1-208-911-81	s	RES, CHIP 10K (1005)
R1422	1-208-911-81	s	RES, CHIP 10K (1005)
R1423	1-208-911-81	s	RES, CHIP 10K (1005)
R1424	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1425	1-208-911-81	s	RES, CHIP 10K (1005)
R1426	1-208-911-81	s	RES, CHIP 10K (1005)
R1427	1-208-911-81	s	RES, CHIP 10K (1005)
R1428	1-208-911-81	s	RES, CHIP 10K (1005)
R1429	1-208-911-81	s	RES, CHIP 10K (1005)
R1430	1-208-911-81	s	RES, CHIP 10K (1005)
R1431	1-208-911-81	s	RES, CHIP 10K (1005)
R1432	1-208-911-81	s	RES, CHIP 10K (1005)
R1433	1-208-911-81	s	RES, CHIP 10K (1005)
R1434	1-208-911-81	s	RES, CHIP 10K (1005)
R1435	1-208-911-81	s	RES, CHIP 10K (1005)
R1436	1-208-911-81	s	RES, CHIP 10K (1005)
R1437	1-208-911-81	s	RES, CHIP 10K (1005)
R1438	1-208-911-81	s	RES, CHIP 10K (1005)
R1439	1-208-911-81	s	RES, CHIP 10K (1005)
R1440	1-208-911-81	s	RES, CHIP 10K (1005)
R1441	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1447	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1461	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1462	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1463	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1464	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1465	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1466	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1467	1-208-911-81	s	RES, CHIP 10K (1005)
R1468	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1469	1-208-911-81	s	RES, CHIP 10K (1005)
R1470	1-208-879-81	s	RES, CHIP 470 (1005)
R1471	1-208-911-81	s	RES, CHIP 10K (1005)
R1472	1-208-879-81	s	RES, CHIP 470 (1005)
R1473	1-208-911-81	s	RES, CHIP 10K (1005)
R1474	1-208-879-81	s	RES, CHIP 470 (1005)
R1475	1-208-879-81	s	RES, CHIP 470 (1005)
R1476	1-208-911-81	s	RES, CHIP 10K (1005)
R1477	1-208-911-81	s	RES, CHIP 10K (1005)
R1478	1-208-879-81	s	RES, CHIP 470 (1005)
R1479	1-208-911-81	s	RES, CHIP 10K (1005)
R1480	1-208-911-81	s	RES, CHIP 10K (1005)
R1481	1-208-879-81	s	RES, CHIP 470 (1005)
R1482	1-208-671-11	s	RES, CHIP 330 (1005)
R1483	1-208-911-81	s	RES, CHIP 10K (1005)
R1484	1-208-911-81	s	RES, CHIP 10K (1005)
R1485	1-208-879-81	s	RES, CHIP 470 (1005)
R1486	1-208-911-81	s	RES, CHIP 10K (1005)
R1487	1-208-911-81	s	RES, CHIP 10K (1005)
R1488	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1489	1-208-911-81	s	RES, CHIP 10K (1005)
R1490	1-208-911-81	s	RES, CHIP 10K (1005)
R1491	1-208-911-81	s	RES, CHIP 10K (1005)
R1492	1-208-911-81	s	RES, CHIP 10K (1005)
R1493	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1494	1-220-878-81	s	RES, CHIP 22 (1005)
R1495	1-220-878-81	s	RES, CHIP 22 (1005)
R1496	1-220-878-81	s	RES, CHIP 22 (1005)
R1497	1-220-878-81	s	RES, CHIP 22 (1005)
R1498	1-220-878-81	s	RES, CHIP 22 (1005)
R1499	1-220-878-81	s	RES, CHIP 22 (1005)
R1500	1-220-878-81	s	RES, CHIP 22 (1005)
R1501	1-220-878-81	s	RES, CHIP 22 (1005)
R1502	1-220-878-81	s	RES, CHIP 22 (1005)
R1503	1-220-878-81	s	RES, CHIP 22 (1005)
R1504	1-220-878-81	s	RES, CHIP 22 (1005)
R1505	1-220-878-81	s	RES, CHIP 22 (1005)
R1506	1-220-878-81	s	RES, CHIP 22 (1005)
R1507	1-220-878-81	s	RES, CHIP 22 (1005)
R1508	1-220-878-81	s	RES, CHIP 22 (1005)
R1509	1-220-878-81	s	RES, CHIP 22 (1005)
R1510	1-220-878-81	s	RES, CHIP 22 (1005)
R1511	1-220-878-81	s	RES, CHIP 22 (1005)
R1512	1-208-911-81	s	RES, CHIP 10K (1005)
R1513	1-208-911-81	s	RES, CHIP 10K (1005)
R1514	1-208-911-81	s	RES, CHIP 10K (1005)
R1515	1-208-911-81	s	RES, CHIP 10K (1005)
R1516	1-208-911-81	s	RES, CHIP 10K (1005)
R1517	1-208-911-81	s	RES, CHIP 10K (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1521	1-208-911-81	s	RES, CHIP 10K (1005)
R1522	1-208-911-81	s	RES, CHIP 10K (1005)
R1523	1-208-911-81	s	RES, CHIP 10K (1005)
R1524	1-208-911-81	s	RES, CHIP 10K (1005)
R1525	1-208-911-81	s	RES, CHIP 10K (1005)
R1526	1-208-911-81	s	RES, CHIP 10K (1005)
R1527	1-208-911-81	s	RES, CHIP 10K (1005)
R1528	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1529	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1530	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1531	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1532	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1533	1-208-911-81	s	RES, CHIP 10K (1005)
R1534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1535	1-208-911-81	s	RES, CHIP 10K (1005)
R1536	1-208-911-81	s	RES, CHIP 10K (1005)
R1537	1-208-911-81	s	RES, CHIP 10K (1005)
R1539	1-208-911-81	s	RES, CHIP 10K (1005)
R1540	1-208-911-81	s	RES, CHIP 10K (1005)
R1541	1-208-911-81	s	RES, CHIP 10K (1005)
R1543	1-208-911-81	s	RES, CHIP 10K (1005)
R1544	1-208-911-81	s	RES, CHIP 10K (1005)
R1545	1-208-911-81	s	RES, CHIP 10K (1005)
R1546	1-208-911-81	s	RES, CHIP 10K (1005)
R1547	1-208-911-81	s	RES, CHIP 10K (1005)
R1548	1-208-911-81	s	RES, CHIP 10K (1005)
R1549	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1552	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1553	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1554	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1555	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1556	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1559	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1560	1-208-927-81	s	RES, CHIP 47K (1005)
R1561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1608	1-220-878-81	s	RES, CHIP 22 (1005)
R1609	1-220-878-81	s	RES, CHIP 22 (1005)
R1610	1-220-878-81	s	RES, CHIP 22 (1005)
R1611	1-220-878-81	s	RES, CHIP 22 (1005)
R1612	1-220-878-81	s	RES, CHIP 22 (1005)
R1613	1-220-878-81	s	RES, CHIP 22 (1005)
R1614	1-220-878-81	s	RES, CHIP 22 (1005)
R1615	1-220-878-81	s	RES, CHIP 22 (1005)
R1616	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1618	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1619	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1620	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1621	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1642	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1643	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1713	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1715	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1717	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1719	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1721	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1723	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1729	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1738	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1739	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1741	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1743	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1745	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1747	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1748	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1749	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1750	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1758	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1759	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1761	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1763	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1765	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1767	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1768	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1769	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1770	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1805	1-208-855-81	s	RES, CHIP 47 (1005)
R1806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1807	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1811	1-208-855-81	s	RES, CHIP 47 (1005)
R1812	1-208-855-81	s	RES, CHIP 47 (1005)
R1813	1-208-855-81	s	RES, CHIP 47 (1005)
R1814	1-208-855-81	s	RES, CHIP 47 (1005)
R1815	1-208-855-81	s	RES, CHIP 47 (1005)
R1816	1-208-855-81	s	RES, CHIP 47 (1005)
R1817	1-208-855-81	s	RES, CHIP 47 (1005)
R1818	1-208-855-81	s	RES, CHIP 47 (1005)
R1819	1-208-855-81	s	RES, CHIP 47 (1005)
R1820	1-208-855-81	s	RES, CHIP 47 (1005)
R1821	1-208-855-81	s	RES, CHIP 47 (1005)
R1822	1-208-855-81	s	RES, CHIP 47 (1005)
R1823	1-208-855-81	s	RES, CHIP 47 (1005)
R1824	1-208-855-81	s	RES, CHIP 47 (1005)
R1825	1-208-855-81	s	RES, CHIP 47 (1005)
R1826	1-208-855-81	s	RES, CHIP 47 (1005)
R1827	1-208-855-81	s	RES, CHIP 47 (1005)
R1828	1-208-855-81	s	RES, CHIP 47 (1005)
R1829	1-208-855-81	s	RES, CHIP 47 (1005)
R1830	1-208-855-81	s	RES, CHIP 47 (1005)
R1831	1-208-855-81	s	RES, CHIP 47 (1005)
R1832	1-208-855-81	s	RES, CHIP 47 (1005)
R1833	1-208-855-81	s	RES, CHIP 47 (1005)
R1834	1-208-855-81	s	RES, CHIP 47 (1005)
R1835	1-208-855-81	s	RES, CHIP 47 (1005)
R1836	1-208-855-81	s	RES, CHIP 47 (1005)
R1837	1-208-855-81	s	RES, CHIP 47 (1005)
R1838	1-208-855-81	s	RES, CHIP 47 (1005)
R1839	1-208-855-81	s	RES, CHIP 47 (1005)
R1840	1-208-855-81	s	RES, CHIP 47 (1005)
R1841	1-208-855-81	s	RES, CHIP 47 (1005)
R1845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1846	1-208-855-81	s	RES, CHIP 47 (1005)
R1847	1-208-855-81	s	RES, CHIP 47 (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1849	1-208-855-81	s	RES, CHIP 47 (1005)
R1850	1-208-855-81	s	RES, CHIP 47 (1005)
R1851	1-208-855-81	s	RES, CHIP 47 (1005)
R1853	1-208-855-81	s	RES, CHIP 47 (1005)
R2001	1-208-927-81	s	RES, CHIP 47K (1005)
R2002	1-208-927-81	s	RES, CHIP 47K (1005)
R2004	1-208-911-81	s	RES, CHIP 10K (1005)
R2005	1-208-911-81	s	RES, CHIP 10K (1005)
R2007	1-208-927-81	s	RES, CHIP 47K (1005)
R2008	1-208-927-81	s	RES, CHIP 47K (1005)
R2010	1-208-911-81	s	RES, CHIP 10K (1005)
R2012	1-208-911-81	s	RES, CHIP 10K (1005)
R2013	1-220-878-81	s	RES, CHIP 22 (1005)
R2014	1-220-878-81	s	RES, CHIP 22 (1005)
R2015	1-220-878-81	s	RES, CHIP 22 (1005)
R2016	1-220-878-81	s	RES, CHIP 22 (1005)
R2017	1-220-878-81	s	RES, CHIP 22 (1005)
R2018	1-220-878-81	s	RES, CHIP 22 (1005)
R2019	1-220-878-81	s	RES, CHIP 22 (1005)
R2020	1-220-878-81	s	RES, CHIP 22 (1005)
R2022	1-208-911-81	s	RES, CHIP 10K (1005)
R2024	1-208-911-81	s	RES, CHIP 10K (1005)
R2026	1-208-911-81	s	RES, CHIP 10K (1005)
R2028	1-208-911-81	s	RES, CHIP 10K (1005)
R2029	1-208-927-81	s	RES, CHIP 47K (1005)
R2030	1-208-927-81	s	RES, CHIP 47K (1005)
R2032	1-208-911-81	s	RES, CHIP 10K (1005)
R2033	1-208-911-81	s	RES, CHIP 10K (1005)
R2035	1-208-927-81	s	RES, CHIP 47K (1005)
R2036	1-208-927-81	s	RES, CHIP 47K (1005)
R2037	1-208-911-81	s	RES, CHIP 10K (1005)
R2039	1-208-911-81	s	RES, CHIP 10K (1005)
R2041	1-220-878-81	s	RES, CHIP 22 (1005)
R2042	1-220-878-81	s	RES, CHIP 22 (1005)
R2043	1-220-878-81	s	RES, CHIP 22 (1005)
R2044	1-220-878-81	s	RES, CHIP 22 (1005)
R2045	1-220-878-81	s	RES, CHIP 22 (1005)
R2046	1-220-878-81	s	RES, CHIP 22 (1005)
R2047	1-220-878-81	s	RES, CHIP 22 (1005)
R2048	1-220-878-81	s	RES, CHIP 22 (1005)
R2050	1-208-911-81	s	RES, CHIP 10K (1005)
R2052	1-208-911-81	s	RES, CHIP 10K (1005)
R2054	1-208-911-81	s	RES, CHIP 10K (1005)
R2056	1-208-911-81	s	RES, CHIP 10K (1005)
R2201	1-208-863-81	s	RES, CHIP 100 (1005)
R2202	1-208-863-81	s	RES, CHIP 100 (1005)
R2203	1-208-863-81	s	RES, CHIP 100 (1005)
R2204	1-208-863-81	s	RES, CHIP 100 (1005)
R2205	1-208-863-81	s	RES, CHIP 100 (1005)
R2251	1-208-863-81	s	RES, CHIP 100 (1005)
R2252	1-208-863-81	s	RES, CHIP 100 (1005)
R2253	1-208-863-81	s	RES, CHIP 100 (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2401	1-220-878-81	s	RES, CHIP 22 (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)
R2502	1-220-878-81	s	RES, CHIP 22 (1005)
R2601	1-208-863-81	s	RES, CHIP 100 (1005)
R2602	1-208-863-81	s	RES, CHIP 100 (1005)
R2603	1-208-863-81	s	RES, CHIP 100 (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R2604	1-208-863-81	s	RES, CHIP 100 (1005)
R2701	1-208-863-81	s	RES, CHIP 100 (1005)
R2702	1-208-863-81	s	RES, CHIP 100 (1005)
R2703	1-208-863-81	s	RES, CHIP 100 (1005)
R2704	1-208-863-81	s	RES, CHIP 100 (1005)
R2705	1-208-863-81	s	RES, CHIP 100 (1005)
R2801	1-208-863-81	s	RES, CHIP 100 (1005)
R2802	1-208-863-81	s	RES, CHIP 100 (1005)
R2803	1-208-911-81	s	RES, CHIP 10K (1005)
R2804	1-208-911-81	s	RES, CHIP 10K (1005)
R2805	1-208-855-81	s	RES, CHIP 47 (1005)
R2806	1-208-855-81	s	RES, CHIP 47 (1005)
R2807	1-220-878-81	s	RES, CHIP 22 (1005)
R2808	1-220-878-81	s	RES, CHIP 22 (1005)
R2809	1-220-878-81	s	RES, CHIP 22 (1005)
R2810	1-220-878-81	s	RES, CHIP 22 (1005)
R2811	1-220-878-81	s	RES, CHIP 22 (1005)
R2812	1-220-878-81	s	RES, CHIP 22 (1005)
R2813	1-220-878-81	s	RES, CHIP 22 (1005)
R2814	1-220-878-81	s	RES, CHIP 22 (1005)
R2815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2901	1-208-863-81	s	RES, CHIP 100 (1005)
R2902	1-208-863-81	s	RES, CHIP 100 (1005)
R2903	1-220-878-81	s	RES, CHIP 22 (1005)
R2904	1-220-878-81	s	RES, CHIP 22 (1005)
R2905	1-220-878-81	s	RES, CHIP 22 (1005)
R2906	1-220-878-81	s	RES, CHIP 22 (1005)
R2907	1-220-878-81	s	RES, CHIP 22 (1005)
R2908	1-220-878-81	s	RES, CHIP 22 (1005)
R2909	1-220-878-81	s	RES, CHIP 22 (1005)
R2910	1-220-878-81	s	RES, CHIP 22 (1005)
R2911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2912	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3002	1-208-863-81	s	RES, CHIP 100 (1005)
R3003	1-208-911-81	s	RES, CHIP 10K (1005)
R3004	1-208-911-81	s	RES, CHIP 10K (1005)
R3005	1-208-855-81	s	RES, CHIP 47 (1005)
R3006	1-208-855-81	s	RES, CHIP 47 (1005)
R3007	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3008	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3009	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3101	1-208-863-81	s	RES, CHIP 100 (1005)
R3102	1-208-863-81	s	RES, CHIP 100 (1005)
R3103	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3201	1-208-863-81	s	RES, CHIP 100 (1005)
R3202	1-208-863-81	s	RES, CHIP 100 (1005)
R3203	1-208-911-81	s	RES, CHIP 10K (1005)
R3204	1-208-911-81	s	RES, CHIP 10K (1005)
R3205	1-208-855-81	s	RES, CHIP 47 (1005)
R3206	1-208-855-81	s	RES, CHIP 47 (1005)
R3207	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3208	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R3209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3301	1-208-863-81	s	RES, CHIP 100 (1005)
R3302	1-208-863-81	s	RES, CHIP 100 (1005)
R3303	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-208-863-81	s	RES, CHIP 100 (1005)
R3402	1-208-863-81	s	RES, CHIP 100 (1005)
R3403	1-208-911-81	s	RES, CHIP 10K (1005)
R3404	1-208-911-81	s	RES, CHIP 10K (1005)
R3405	1-208-855-81	s	RES, CHIP 47 (1005)
R3406	1-208-855-81	s	RES, CHIP 47 (1005)
R3407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3409	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3501	1-208-863-81	s	RES, CHIP 100 (1005)
R3502	1-208-863-81	s	RES, CHIP 100 (1005)
R3503	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3504	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3601	1-208-863-81	s	RES, CHIP 100 (1005)
R3602	1-208-863-81	s	RES, CHIP 100 (1005)
R3603	1-208-911-81	s	RES, CHIP 10K (1005)
R3604	1-208-911-81	s	RES, CHIP 10K (1005)
R3605	1-208-855-81	s	RES, CHIP 47 (1005)
R3606	1-208-855-81	s	RES, CHIP 47 (1005)
R3607	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3608	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3609	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3701	1-208-863-81	s	RES, CHIP 100 (1005)
R3702	1-208-863-81	s	RES, CHIP 100 (1005)
R3703	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3704	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3801	1-208-911-81	s	RES, CHIP 10K (1005)
R3802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3806	1-208-863-81	s	RES, CHIP 100 (1005)
R3807	1-208-863-81	s	RES, CHIP 100 (1005)
R3808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3812	1-208-911-81	s	RES, CHIP 10K (1005)
R3813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3814	1-208-911-81	s	RES, CHIP 10K (1005)
R3815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3816	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R3817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3818	1-208-911-81	s	RES, CHIP 10K (1005)
R3819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3901	1-208-911-81	s	RES, CHIP 10K (1005)
R3902	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3903	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3906	1-208-863-81	s	RES, CHIP 100 (1005)
R3907	1-208-863-81	s	RES, CHIP 100 (1005)
R3908	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3909	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3910	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3912	1-208-911-81	s	RES, CHIP 10K (1005)
R3914	1-208-911-81	s	RES, CHIP 10K (1005)
R3915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3916	1-208-911-81	s	RES, CHIP 10K (1005)
R3917	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3918	1-208-911-81	s	RES, CHIP 10K (1005)
R3919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4001	1-208-911-81	s	RES, CHIP 10K (1005)
R4002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4006	1-208-863-81	s	RES, CHIP 100 (1005)
R4007	1-208-863-81	s	RES, CHIP 100 (1005)
R4008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4012	1-208-911-81	s	RES, CHIP 10K (1005)
R4013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4014	1-208-911-81	s	RES, CHIP 10K (1005)
R4016	1-208-911-81	s	RES, CHIP 10K (1005)
R4017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4018	1-208-911-81	s	RES, CHIP 10K (1005)
R4019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4101	1-208-911-81	s	RES, CHIP 10K (1005)
R4102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4106	1-208-863-81	s	RES, CHIP 100 (1005)
R4107	1-208-863-81	s	RES, CHIP 100 (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-208-911-81	s	RES, CHIP 10K (1005)
R4114	1-208-911-81	s	RES, CHIP 10K (1005)
R4116	1-208-911-81	s	RES, CHIP 10K (1005)
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-208-911-81	s	RES, CHIP 10K (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4201	1-208-911-81	s	RES, CHIP 10K (1005)
R4202	1-208-911-81	s	RES, CHIP 10K (1005)
R4203	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R4204	1-208-911-81	s	RES, CHIP 10K (1005)
R4205	1-208-911-81	s	RES, CHIP 10K (1005)
R4206	1-208-863-81	s	RES, CHIP 100 (1005)
R4207	1-208-863-81	s	RES, CHIP 100 (1005)
R4208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4212	1-208-911-81	s	RES, CHIP 10K (1005)
R4213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4214	1-208-911-81	s	RES, CHIP 10K (1005)
R4215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4216	1-208-911-81	s	RES, CHIP 10K (1005)
R4218	1-208-911-81	s	RES, CHIP 10K (1005)
R4219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4303	1-208-911-81	s	RES, CHIP 10K (1005)
R4304	1-208-911-81	s	RES, CHIP 10K (1005)
R4305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4501	1-208-911-81	s	RES, CHIP 10K (1005)
R4503	1-208-911-81	s	RES, CHIP 10K (1005)
R4504	1-208-911-81	s	RES, CHIP 10K (1005)
R4505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4701	1-208-911-81	s	RES, CHIP 10K (1005)
R4703	1-208-911-81	s	RES, CHIP 10K (1005)
R4705	1-208-911-81	s	RES, CHIP 10K (1005)
R4707	1-208-911-81	s	RES, CHIP 10K (1005)
R4709	1-208-911-81	s	RES, CHIP 10K (1005)
R4710	1-208-911-81	s	RES, CHIP 10K (1005)
R4711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5001	1-208-911-81	s	RES, CHIP 10K (1005)
R5002	1-208-911-81	s	RES, CHIP 10K (1005)
R5003	1-208-855-81	s	RES, CHIP 47 (1005)
R5004	1-208-855-81	s	RES, CHIP 47 (1005)
R5005	1-208-855-81	s	RES, CHIP 47 (1005)
R5006	1-208-855-81	s	RES, CHIP 47 (1005)
R5007	1-208-855-81	s	RES, CHIP 47 (1005)
R5008	1-208-855-81	s	RES, CHIP 47 (1005)
R5009	1-208-855-81	s	RES, CHIP 47 (1005)
R5010	1-208-855-81	s	RES, CHIP 47 (1005)
R5011	1-208-855-81	s	RES, CHIP 47 (1005)
R5012	1-208-855-81	s	RES, CHIP 47 (1005)
R5013	1-208-855-81	s	RES, CHIP 47 (1005)
R5014	1-208-855-81	s	RES, CHIP 47 (1005)
R5019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5201	1-208-855-81	s	RES, CHIP 47 (1005)
R5202	1-208-855-81	s	RES, CHIP 47 (1005)
R5203	1-208-855-81	s	RES, CHIP 47 (1005)
R5204	1-208-855-81	s	RES, CHIP 47 (1005)
R5205	1-208-855-81	s	RES, CHIP 47 (1005)
R5206	1-208-855-81	s	RES, CHIP 47 (1005)
R5207	1-208-855-81	s	RES, CHIP 47 (1005)
R5208	1-208-855-81	s	RES, CHIP 47 (1005)
R5209	1-208-855-81	s	RES, CHIP 47 (1005)
R5210	1-208-855-81	s	RES, CHIP 47 (1005)
R5211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5214	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R5215	1-208-855-81	s	RES, CHIP 47 (1005)
R5216	1-208-855-81	s	RES, CHIP 47 (1005)
R5217	1-208-855-81	s	RES, CHIP 47 (1005)
R5218	1-208-855-81	s	RES, CHIP 47 (1005)
R5219	1-208-855-81	s	RES, CHIP 47 (1005)
R5220	1-208-855-81	s	RES, CHIP 47 (1005)
R5221	1-208-855-81	s	RES, CHIP 47 (1005)
R5222	1-208-855-81	s	RES, CHIP 47 (1005)
R5223	1-208-855-81	s	RES, CHIP 47 (1005)
R5224	1-208-855-81	s	RES, CHIP 47 (1005)
R5401	1-208-855-81	s	RES, CHIP 47 (1005)
R5402	1-208-855-81	s	RES, CHIP 47 (1005)
R5403	1-208-855-81	s	RES, CHIP 47 (1005)
R5404	1-208-855-81	s	RES, CHIP 47 (1005)
R5405	1-208-855-81	s	RES, CHIP 47 (1005)
R5406	1-208-855-81	s	RES, CHIP 47 (1005)
R5407	1-208-855-81	s	RES, CHIP 47 (1005)
R5408	1-208-855-81	s	RES, CHIP 47 (1005)
R5409	1-208-855-81	s	RES, CHIP 47 (1005)
R5410	1-208-855-81	s	RES, CHIP 47 (1005)
R5411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5415	1-208-855-81	s	RES, CHIP 47 (1005)
R5416	1-208-855-81	s	RES, CHIP 47 (1005)
R5417	1-208-855-81	s	RES, CHIP 47 (1005)
R5418	1-208-855-81	s	RES, CHIP 47 (1005)
R5419	1-208-855-81	s	RES, CHIP 47 (1005)
R5420	1-208-855-81	s	RES, CHIP 47 (1005)
R5421	1-208-855-81	s	RES, CHIP 47 (1005)
R5422	1-208-855-81	s	RES, CHIP 47 (1005)
R5423	1-208-855-81	s	RES, CHIP 47 (1005)
R5424	1-208-855-81	s	RES, CHIP 47 (1005)
RB701	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB702	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB703	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB704	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB918	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB919	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB920	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB921	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB922	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB923	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB924	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB925	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB926	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1116	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1117	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1119	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1120	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1121	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1122	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1123	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1124	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1125	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1151	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1152	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1153	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1154	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1155	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1156	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1157	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1158	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1159	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1160	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1161	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1162	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1163	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1164	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1165	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1166	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1167	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1168	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1169	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1170	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1709	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MIX-53 BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB1710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
S901	1-771-721-21	s	SWITCH, TACTILE
S902	1-786-277-21	s	SWITCH, TACTILE
T1001	1-445-895-11	s	TRANSFORMER, PULSE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP210	1-535-877-22	s	CHIP, CHECKER
TP211	1-535-877-22	s	CHIP, CHECKER
TP212	1-535-877-22	s	CHIP, CHECKER
TP213	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP405	1-535-877-22	s	CHIP, CHECKER
TP406	1-535-877-22	s	CHIP, CHECKER
TP407	1-535-877-22	s	CHIP, CHECKER
TP408	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1002	1-535-877-22	s	CHIP, CHECKER
X501	1-813-488-11	s	OSCILLATOR, CRYSTAL

MIX-53 BOARD (SUFFIX 14)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
17pcs	4-143-557-01	s	SPRING, COMPRESSION
17pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
5pcs	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	4-187-619-01	s	SHEET,RADIATION(25X25X2)
6pcs	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
2pcs	6-714-073-01	s	IC 88E1118R-A0-NNC2C000
1pc	7-626-320-61	s	PIN, SPRING 3X18
4pcs	7-682-549-09	s	SCREW +B 3X10
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C101	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C234	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C235	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C236	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C237	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C238	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C239	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C241	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C242	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C243	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C244	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C245	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C246	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C247	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C248	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C249	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C250	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C251	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C252	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C253	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C254	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C255	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C256	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C257	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C258	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C259	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C260	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C261	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C262	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C263	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C264	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C265	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C266	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C267	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C268	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C269	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C270	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C271	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C272	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C273	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C274	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C275	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C276	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C277	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C278	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C279	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C280	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C281	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C282	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C283	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C284	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C285	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C286	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C287	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C288	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C289	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C290	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C291	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C292	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C293	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C294	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C295	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C296	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C297	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C298	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C299	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C300	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C301	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C302	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C303	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C304	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C305	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C306	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C412	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C417	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C420	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C421	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C426	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C427	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C429	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C430	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C434	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C440	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C441	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C442	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C443	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C446	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C505	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C509	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C513	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C514	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C516	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C517	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C518	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C520	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C521	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C522	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C523	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C524	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C525	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C528	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C530	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C533	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C534	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C537	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C539	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C541	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C542	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C543	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C546	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C547	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C548	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C607	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C615	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C710	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C712	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C713	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C714	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C715	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C716	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C717	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C905	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C907	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C909	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1010	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1011	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1012	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1013	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1014	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1015	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1016	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1018	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1019	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1022	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1024	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1033	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C1038	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1042	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1043	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1044	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1046	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1048	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1050	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1115	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1117	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1118	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1119	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1121	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1123	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1125	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1151	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1152	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1153	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1154	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1155	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1156	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1157	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1158	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1159	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1160	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1161	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1162	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1163	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1164	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1165	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1166	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1201	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1205	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1207	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1209	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1401	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1404	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1409	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1418	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1420	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1422	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1424	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1426	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1901	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1902	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1903	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1904	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1905	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1906	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1907	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1908	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1909	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1910	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1911	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1912	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1913	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1914	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1915	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1916	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1917	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1918	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1919	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1920	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1921	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1922	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1923	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1924	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1925	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1926	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1927	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1928	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1929	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1930	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1931	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1932	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1933	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1934	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1935	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1936	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1937	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1938	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1939	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1940	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1941	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1942	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1943	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1944	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1945	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1946	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1947	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1948	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1949	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1950	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1951	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1952	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1953	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1954	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1955	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1956	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1957	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1958	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1959	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1960	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1961	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1962	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1963	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1964	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1965	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1966	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1967	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1968	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1969	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1970	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1971	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1972	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1973	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1974	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1975	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1976	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1977	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1978	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1979	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1980	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1981	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1982	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1983	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1984	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1985	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1986	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1987	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1988	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1989	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1990	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1991	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1992	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1993	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1994	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1995	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1996	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2001	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2018	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2019	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2022	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2024	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2026	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2028	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2030	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2032	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2033	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2036	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2038	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2040	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2042	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2043	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2044	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2045	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2046	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2047	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2048	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2049	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2050	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2051	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2052	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2053	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2054	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2055	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2056	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2057	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2058	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2059	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2060	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2061	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2062	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2063	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2064	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2065	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2066	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2067	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2068	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2069	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2070	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2071	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2072	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2073	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2074	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2075	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2076	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2077	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2078	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2079	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2080	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2081	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2082	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2083	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2084	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2085	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2086	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2087	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2088	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2108	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2109	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2110	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2111	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2112	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2113	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2114	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2118	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2119	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2120	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2121	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2122	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2123	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2124	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2129	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2130	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2133	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2134	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2135	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2136	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2139	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2140	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2141	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2142	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2143	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2144	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2145	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2146	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2147	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2148	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2701	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2702	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2703	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2704	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2705	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2706	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2707	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2708	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2711	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2713	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2714	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2715	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2716	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2717	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2718	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2719	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2720	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2721	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2722	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2723	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2724	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2725	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2726	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2727	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2729	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2730	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2732	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2733	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2734	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2735	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2736	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2737	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2738	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2739	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2740	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2741	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2742	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2743	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2744	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2745	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2746	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2747	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2748	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2749	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2750	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2751	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2752	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2821	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2829	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2831	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2833	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2834	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2836	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2842	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2910	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2914	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2916	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2919	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2921	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2925	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2927	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C2928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2929	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3006	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3014	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3016	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3018	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3020	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3021	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3033	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3036	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3042	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3116	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3119	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3121	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3123	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3125	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3129	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3135	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3214	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3216	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3220	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3221	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3223	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3225	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3227	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3229	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3231	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3233	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3242	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3316	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3321	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3323	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3325	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3327	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3329	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3331	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3333	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3335	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3402	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3406	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3410	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3416	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3420	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3421	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3423	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3425	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3427	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3429	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3430	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3431	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3432	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3433	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3434	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3436	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3442	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3521	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3523	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3525	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3531	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3535	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3606	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3610	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3616	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3618	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3620	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3621	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3623	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3625	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3627	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3629	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3631	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3632	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3633	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3634	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3636	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3642	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3735	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3801	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3802	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3803	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3804	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3805	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3806	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3807	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3808	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3809	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3810	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3811	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3812	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3813	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3814	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3815	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3816	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3817	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3818	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3819	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3820	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3823	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3825	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3827	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3829	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3831	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3837	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3839	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3841	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3843	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3845	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3847	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3849	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3851	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3853	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3855	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3857	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3859	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3861	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3862	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3863	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3865	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3867	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3868	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3869	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3870	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3872	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3874	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3876	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3877	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3879	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3881	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3882	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3883	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3885	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3887	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3889	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3891	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3893	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3894	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3901	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3902	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3903	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3904	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3905	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3906	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3907	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3908	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3909	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3910	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3911	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3912	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3913	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3914	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3915	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3916	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3917	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3918	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3919	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3920	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3923	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3925	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3927	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3929	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3931	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3933	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3935	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3937	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3939	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3941	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3943	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3945	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3947	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3950	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3951	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3953	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3955	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3957	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3959	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3961	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3962	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C3963	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3965	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3967	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3969	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3970	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3972	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3974	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3975	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3976	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3977	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3979	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3981	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3983	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3985	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3987	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3989	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3991	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3993	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C3994	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4002	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4003	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4004	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4005	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4006	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4007	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4008	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4009	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4010	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4011	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4012	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4013	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4014	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4015	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4016	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4017	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4018	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4019	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4020	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4031	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4043	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4045	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4049	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4051	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4053	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4055	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4057	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4059	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4061	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4062	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4063	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4065	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4067	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4068	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4069	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4070	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4072	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4073	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4074	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4077	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4078	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4079	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4081	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4083	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4084	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4085	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4087	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4089	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4091	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4093	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4101	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4102	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4103	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4104	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4105	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4106	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4107	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4108	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4109	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4110	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4111	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4112	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4113	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4114	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4115	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4116	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4117	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4118	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4119	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4120	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4123	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4125	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4129	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4131	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4133	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4135	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4137	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4139	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4141	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4143	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4145	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4147	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4149	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4150	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4151	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4153	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4155	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4157	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4159	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4161	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4162	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4163	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4165	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4167	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4169	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4170	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4172	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4174	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4176	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4177	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4179	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4181	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4183	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4185	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4187	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4189	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4191	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4193	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4201	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4202	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4203	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4204	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4205	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4206	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4207	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4208	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4209	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4210	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4211	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4212	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4213	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4214	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4215	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4216	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4217	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4218	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4219	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4220	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4223	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4225	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4227	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4229	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4231	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4233	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4235	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4237	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4239	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4241	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4243	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4245	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4247	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4249	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4251	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4255	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4257	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4259	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4261	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4262	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4263	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4265	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4267	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4269	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4270	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4271	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4272	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4274	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4276	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4277	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4279	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4281	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4282	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4283	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4284	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4285	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4286	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4287	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4289	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4291	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4293	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4303	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4304	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4305	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4310	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4313	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4317	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4318	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4323	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4325	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4327	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4329	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4330	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4332	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4334	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4335	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4336	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4338	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4340	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4341	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4342	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4343	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4344	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4345	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4347	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4349	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4350	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4352	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4353	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4356	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4357	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4358	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4361	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4362	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4363	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4364	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4366	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4368	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4369	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4371	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4372	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4373	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4376	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4377	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4378	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4381	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4384	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4385	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4386	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4387	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4388	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4389	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4390	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4391	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4393	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4394	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4396	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4397	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4400	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4403	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4404	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4405	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4408	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4409	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4412	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4414	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4417	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4420	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4422	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4424	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4426	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4428	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4432	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4434	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4435	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4437	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4438	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4441	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4443	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4445	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4446	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4447	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4449	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4450	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4452	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4453	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4454	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4455	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4456	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4457	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4458	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4459	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4460	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4461	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4462	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4463	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4464	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4465	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4466	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4467	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4468	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4469	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4470	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4471	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4472	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4473	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4474	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4475	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4476	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4477	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4478	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4479	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4480	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4481	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4482	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4483	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4484	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4485	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4486	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4487	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4488	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4489	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4490	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4491	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4492	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4493	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4494	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4510	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4513	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4517	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4523	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4525	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4541	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4542	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4544	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4545	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4546	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4547	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4549	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4550	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4552	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4553	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4556	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4557	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4558	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4560	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4561	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4562	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4563	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4564	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4566	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4567	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4568	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4569	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4571	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4572	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4573	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4576	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4577	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4578	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4579	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4581	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4583	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4584	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4585	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4586	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4587	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4588	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4589	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4590	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4591	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4592	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4593	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4594	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4595	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4596	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4597	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4598	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4599	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4600	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4603	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4604	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4605	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4608	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4609	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4612	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4614	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4615	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4616	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4617	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4620	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4622	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4624	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4626	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4628	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4630	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4632	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4634	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4635	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4637	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4638	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4641	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4643	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4644	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4645	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4646	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4647	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4649	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4650	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4651	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4652	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4653	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4654	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4655	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4656	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4657	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4658	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4659	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4660	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4661	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4662	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4663	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4664	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4665	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4666	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4667	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4668	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4669	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4670	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4671	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4672	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4673	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4674	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4675	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4676	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4677	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4678	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4679	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4680	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4681	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4682	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4683	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4685	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4686	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4689	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4690	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4691	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4692	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4693	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4694	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4702	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4711	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4715	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4734	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4735	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4736	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4739	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4740	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4741	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4744	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4746	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4747	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4748	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4749	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4750	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4751	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4754	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4755	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4756	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4757	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4759	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4761	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4762	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4764	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4766	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4767	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4768	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4770	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4771	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4774	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4775	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4776	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4777	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4780	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4782	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4785	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4788	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4789	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4793	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4796	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4797	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4799	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4800	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4807	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4810	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4811	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4812	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4818	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4822	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4824	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4830	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4838	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4841	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4842	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4844	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4847	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4848	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4850	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4853	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4854	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4858	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4861	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4862	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4865	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4868	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4873	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4878	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4882	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4883	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4884	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4886	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4887	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4888	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4889	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4891	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4893	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4894	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4895	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4896	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4897	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4898	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4899	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4907	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4908	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4909	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4910	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4912	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4913	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4914	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4915	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C4916	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4917	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4918	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4919	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4920	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4921	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4922	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4924	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4925	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4926	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4927	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4928	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4929	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4930	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4931	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4932	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4933	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4934	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4935	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4936	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4937	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4938	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4939	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4940	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4941	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4942	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4943	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4944	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4945	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4946	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4947	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4948	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4949	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4950	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4951	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4952	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4953	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C4954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4961	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4969	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4970	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5003	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5004	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5005	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5009	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5013	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5014	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5018	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5019	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5022	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5023	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5024	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5025	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5027	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5029	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5030	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5032	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5034	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5036	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5038	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5040	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5042	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5044	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5045	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5047	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5049	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5050	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5052	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5053	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5056	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5057	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5058	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5061	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5062	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5063	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5064	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5065	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5066	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5067	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5068	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5069	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5071	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5072	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5073	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5074	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5076	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5077	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5078	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5079	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5081	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5083	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5084	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5085	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5087	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5088	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5089	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5091	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5093	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5095	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5096	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5097	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5098	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5099	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5100	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5103	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5114	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5115	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5117	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5120	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5122	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5124	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5126	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5128	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5130	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5132	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5134	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5135	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5137	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5138	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5141	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5143	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5145	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5147	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5149	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5150	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5151	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5152	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5153	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5154	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5155	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5156	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5157	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5158	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5159	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5161	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5162	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5163	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5164	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5165	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5166	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5167	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5168	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5169	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5170	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5171	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5172	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C5173	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5174	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5175	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5176	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5177	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5178	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5179	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5180	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5181	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5182	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5183	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5187	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5189	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5195	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5196	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5197	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5198	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5199	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5201	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C5202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5224	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5225	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5226	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5228	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5230	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5232	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5234	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5236	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5238	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5240	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5242	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5243	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5244	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5246	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5248	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5250	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5252	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5254	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5256	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5257	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5258	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5260	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5262	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5263	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5264	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5265	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5267	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5269	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5271	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5273	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5275	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5277	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5279	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5280	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5281	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5282	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5284	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5286	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5287	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5288	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5289	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5290	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5291	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5292	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5293	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5294	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5295	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5296	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5297	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5299	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5300	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5301	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5302	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5306	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5308	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5309	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5311	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5312	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5314	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5315	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5317	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5318	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5320	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5325	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5326	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5327	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5328	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5329	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5330	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5331	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5332	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5333	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5334	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5335	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5336	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5338	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5340	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5401	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C5402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5424	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5425	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5426	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5428	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5430	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5432	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5434	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5436	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5438	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5440	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5442	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5443	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5444	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5446	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5448	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5450	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5452	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5454	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5456	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5458	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5459	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5460	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5461	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5462	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5464	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5465	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5466	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5467	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5468	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5469	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5470	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5471	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5472	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5473	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5474	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5475	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5476	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5477	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5479	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5480	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5481	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5482	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5483	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5484	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5485	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5486	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5487	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5488	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5489	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5490	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5491	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5492	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5493	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5494	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5495	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5496	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5497	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5498	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5499	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5500	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5501	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5502	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5509	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5514	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5517	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5518	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5519	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5520	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5522	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5524	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5525	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5526	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5527	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5528	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5529	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5530	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5531	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5532	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5533	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5534	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5535	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5536	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C5537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5538	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C5539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5540	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
CN901	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN902	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN1001	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN1801	1-770-627-21	s	PIN, CONNECTOR 10P
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D308	6-502-197-01	s	DI SML-D12M8WT86SM
D309	6-502-197-01	s	DI SML-D12M8WT86SM
D310	6-502-197-01	s	DI SML-D12M8WT86SM
D311	6-502-197-01	s	DI SML-D12M8WT86SM
D403	8-719-069-28	s	DI 1SS400FJTE61
D404	8-719-069-28	s	DI 1SS400FJTE61
D407	8-719-069-28	s	DI 1SS400FJTE61
D408	8-719-069-28	s	DI 1SS400FJTE61
D409	8-719-069-28	s	DI 1SS400FJTE61
D410	8-719-069-28	s	DI 1SS400FJTE61
D414	6-502-197-01	s	DI SML-D12M8WT86SM
D415	6-502-197-01	s	DI SML-D12M8WT86SM
D416	6-502-197-01	s	DI SML-D12M8WT86SM
D417	6-502-197-01	s	DI SML-D12M8WT86SM
D418	6-502-197-01	s	DI SML-D12M8WT86SM
D419	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-598-01	s	DI SML-D12U8WT86
D701	6-502-598-01	s	DI SML-D12U8WT86
D702	6-502-197-01	s	DI SML-D12M8WT86SM
D703	6-502-197-01	s	DI SML-D12M8WT86SM
D704	6-502-197-01	s	DI SML-D12M8WT86SM
D705	6-502-197-01	s	DI SML-D12M8WT86SM
D706	6-502-197-01	s	DI SML-D12M8WT86SM
D707	6-502-197-01	s	DI SML-D12M8WT86SM
D708	6-502-197-01	s	DI SML-D12M8WT86SM
D709	6-502-197-01	s	DI SML-D12M8WT86SM
D710	6-502-197-01	s	DI SML-D12M8WT86SM
D711	6-502-197-01	s	DI SML-D12M8WT86SM
D712	6-502-197-01	s	DI SML-D12M8WT86SM
D713	6-502-197-01	s	DI SML-D12M8WT86SM
D714	6-502-197-01	s	DI SML-D12M8WT86SM
D715	6-502-197-01	s	DI SML-D12M8WT86SM
D716	6-502-197-01	s	DI SML-D12M8WT86SM
D717	6-502-197-01	s	DI SML-D12M8WT86SM
D718	6-502-352-01	s	DI SML-522MU8WT86PQ
D719	6-502-352-01	s	DI SML-522MU8WT86PQ
D720	6-502-598-01	s	DI SML-D12U8WT86
D721	6-501-436-01	s	DIODE SML412BC6TT86
D1001	6-502-197-01	s	DI SML-D12M8WT86SM
D1002	6-502-197-01	s	DI SML-D12M8WT86SM
D1401	6-502-598-01	s	DI SML-D12U8WT86
D1402	6-502-598-01	s	DI SML-D12U8WT86

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
D1403	6-502-598-01	s	DI SML-D12U8WT86
D1404	6-502-598-01	s	DI SML-D12U8WT86
D1405	6-502-598-01	s	DI SML-D12U8WT86
D1406	6-502-598-01	s	DI SML-D12U8WT86
D1407	6-502-598-01	s	DI SML-D12U8WT86
D1408	6-502-598-01	s	DI SML-D12U8WT86
D1409	6-502-598-01	s	DI SML-D12U8WT86
D1410	6-502-598-01	s	DI SML-D12U8WT86
D1411	6-502-598-01	s	DI SML-D12U8WT86
D1412	6-502-598-01	s	DI SML-D12U8WT86
D1413	6-502-598-01	s	DI SML-D12U8WT86
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
DD207	1-487-092-11	s	DC-DC CONVERTER
DD208	1-487-092-11	s	DC-DC CONVERTER
DD209	1-487-092-11	s	DC-DC CONVERTER
DD210	1-487-092-11	s	DC-DC CONVERTER
DD211	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
E22	1-535-877-22	s	CHIP, CHECKER
E23	1-535-877-22	s	CHIP, CHECKER
E24	1-535-877-22	s	CHIP, CHECKER
E25	1-535-877-22	s	CHIP, CHECKER
E26	1-535-877-22	s	CHIP, CHECKER
E27	1-535-877-22	s	CHIP, CHECKER
E28	1-535-877-22	s	CHIP, CHECKER
E29	1-535-877-22	s	CHIP, CHECKER
E30	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F207	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F208	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F209	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F210	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F211	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F212	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
FB903	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2001	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2002	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2003	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2004	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2005	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2006	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2007	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2008	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4301	1-400-580-21	s	FERRITE, EMI (SMD)
FB4302	1-400-580-21	s	FERRITE, EMI (SMD)
FB4303	1-400-580-21	s	FERRITE, EMI (SMD)
FB4501	1-400-580-21	s	FERRITE, EMI (SMD)
FB4502	1-400-580-21	s	FERRITE, EMI (SMD)
FB4503	1-400-580-21	s	FERRITE, EMI (SMD)
FB4701	1-400-580-21	s	FERRITE, EMI (SMD)
FB4702	1-400-580-21	s	FERRITE, EMI (SMD)
FB4703	1-400-580-21	s	FERRITE, EMI (SMD)
FB5001	1-400-580-21	s	FERRITE, EMI (SMD)
FB5002	1-400-580-21	s	FERRITE, EMI (SMD)
FB5003	1-400-580-21	s	FERRITE, EMI (SMD)
FB5201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5202	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB5401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5402	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
IC301	8-759-338-95	s	IC NJM2903V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC305	8-759-338-95	s	IC NJM2903V(TE2)
IC306	8-759-338-95	s	IC NJM2903V(TE2)
IC501	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC502	6-708-324-01	s	IC R3112N301A-TR-FA
IC503	6-714-109-01	s	IC LMK03000CISQ
IC504	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC505	6-714-616-11	s	IC DS90LV110ATMTX
IC506	6-714-616-11	s	IC DS90LV110ATMTX
IC507	6-714-616-11	s	IC DS90LV110ATMTX
IC701	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC901	6-705-514-01	s	IC MAX3222IPWR
IC902	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC1001	6-710-018-01	s	IC CAT24C02WI-GT3
IC1002	6-714-192-01	s	IC ADT75BRMZ-REEL
IC1003	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1004	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1005	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1006	6-707-850-01	s	IC TC74LCX245FT(EKJ)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
IC1101	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1102	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1103	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1104	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1105	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1106	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1107	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1151	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1152	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1153	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1154	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1201	6-714-463-01	s	IC M29W256GL70N6E
IC1203	6-714-463-01	s	IC M29W256GL70N6E
IC1204	6-714-463-01	s	IC M29W256GL70N6E
IC1205	6-714-463-01	s	IC M29W256GL70N6E
IC1601	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1701	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1702	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1703	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1704	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1705	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1801	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1802	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1803	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC2803	8-759-388-62	s	IC NJU7062M(TE2)
IC3003	8-759-388-62	s	IC NJU7062M(TE2)
IC3203	8-759-388-62	s	IC NJU7062M(TE2)
IC3403	8-759-388-62	s	IC NJU7062M(TE2)
IC3603	8-759-388-62	s	IC NJU7062M(TE2)
IC4301	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4501	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4701	6-706-224-01	s	IC ADM1032ARMZ-R7
IC5001	6-706-224-01	s	IC ADM1032ARMZ-R7
L401	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L402	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L501	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3801	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3802	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3803	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3804	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3805	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3806	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3807	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3808	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3809	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3810	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3811	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3812	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3813	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3814	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3815	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3816	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3817	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3818	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
L3905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3909	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3910	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3911	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3912	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3913	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3914	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3915	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3916	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3917	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3918	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L4001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4009	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4010	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4011	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4012	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4013	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4014	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4015	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4016	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4017	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4018	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L4101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4105	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4106	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4109	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4110	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4111	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4112	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4113	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4114	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4115	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4116	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4117	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4118	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L4201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4208	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4209	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
L4210	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4211	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4212	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4213	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4214	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4215	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4216	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4217	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4218	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L4301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4505	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4506	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4507	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4508	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4707	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4708	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4709	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4710	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4711	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4712	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q312	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q313	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q314	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q315	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q316	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q317	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q318	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q319	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q320	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q321	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q322	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q409	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q410	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q411	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q412	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q413	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q414	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q415	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-208-951-81	s	RES, CHIP 470K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-927-81	s	RES, CHIP 47K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-927-81	s	RES, CHIP 47K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-919-81	s	RES, CHIP 22K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-919-81	s	RES, CHIP 22K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R226	1-208-935-81	s	RES, CHIP 100K (1005)
R227	1-208-935-81	s	RES, CHIP 100K (1005)
R228	1-208-943-81	s	RES, CHIP 220K (1005)
R229	1-208-935-81	s	RES, CHIP 100K (1005)
R230	1-208-943-81	s	RES, CHIP 220K (1005)
R231	1-208-903-81	s	RES, CHIP 4.7K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R233	1-208-903-81	s	RES, CHIP 4.7K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R236	1-208-927-81	s	RES, CHIP 47K (1005)
R237	1-208-927-81	s	RES, CHIP 47K (1005)
R238	1-208-927-81	s	RES, CHIP 47K (1005)
R239	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-919-81	s	RES, CHIP 22K (1005)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R247	1-208-935-81	s	RES, CHIP 100K (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R250	1-208-911-81	s	RES, CHIP 10K (1005)
R251	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-208-943-81	s	RES, CHIP 220K (1005)
R253	1-208-895-81	s	RES, CHIP 2.2K (1005)
R254	1-208-911-81	s	RES, CHIP 10K (1005)
R255	1-208-903-81	s	RES, CHIP 4.7K (1005)
R256	1-208-903-81	s	RES, CHIP 4.7K (1005)
R257	1-208-903-81	s	RES, CHIP 4.7K (1005)
R258	1-208-903-81	s	RES, CHIP 4.7K (1005)
R259	1-208-927-81	s	RES, CHIP 47K (1005)
R260	1-208-919-81	s	RES, CHIP 22K (1005)
R262	1-208-919-81	s	RES, CHIP 22K (1005)
R263	1-208-879-81	s	RES, CHIP 470 (1005)
R264	1-208-903-81	s	RES, CHIP 4.7K (1005)
R265	1-208-927-81	s	RES, CHIP 47K (1005)
R266	1-208-911-81	s	RES, CHIP 10K (1005)
R267	1-208-919-81	s	RES, CHIP 22K (1005)
R268	1-208-935-81	s	RES, CHIP 100K (1005)
R269	1-208-943-81	s	RES, CHIP 220K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-935-81	s	RES, CHIP 100K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-895-81	s	RES, CHIP 2.2K (1005)
R334	1-208-911-81	s	RES, CHIP 10K (1005)
R335	1-208-911-81	s	RES, CHIP 10K (1005)
R336	1-208-935-81	s	RES, CHIP 100K (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-903-81	s	RES, CHIP 4.7K (1005)
R339	1-208-895-81	s	RES, CHIP 2.2K (1005)
R340	1-208-903-81	s	RES, CHIP 4.7K (1005)
R341	1-208-911-81	s	RES, CHIP 10K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-935-81	s	RES, CHIP 100K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R347	1-208-887-81	s	RES, CHIP 1.0K (1005)
R349	1-208-911-81	s	RES, CHIP 10K (1005)
R350	1-208-935-81	s	RES, CHIP 100K (1005)
R351	1-208-911-81	s	RES, CHIP 10K (1005)
R352	1-208-903-81	s	RES, CHIP 4.7K (1005)
R353	1-208-895-81	s	RES, CHIP 2.2K (1005)
R354	1-208-919-81	s	RES, CHIP 22K (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R356	1-208-935-81	s	RES, CHIP 100K (1005)
R357	1-208-911-81	s	RES, CHIP 10K (1005)
R358	1-208-903-81	s	RES, CHIP 4.7K (1005)
R359	1-208-895-81	s	RES, CHIP 2.2K (1005)
R360	1-208-887-81	s	RES, CHIP 1.0K (1005)
R361	1-208-911-81	s	RES, CHIP 10K (1005)
R362	1-208-935-81	s	RES, CHIP 100K (1005)
R363	1-208-911-81	s	RES, CHIP 10K (1005)
R364	1-208-903-81	s	RES, CHIP 4.7K (1005)
R365	1-208-895-81	s	RES, CHIP 2.2K (1005)
R366	1-208-887-81	s	RES, CHIP 1.0K (1005)
R367	1-208-935-81	s	RES, CHIP 100K (1005)
R368	1-208-911-81	s	RES, CHIP 10K (1005)
R369	1-208-911-81	s	RES, CHIP 10K (1005)
R370	1-208-903-81	s	RES, CHIP 4.7K (1005)
R371	1-208-895-81	s	RES, CHIP 2.2K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R412	1-208-903-81	s	RES, CHIP 4.7K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R415	1-208-919-81	s	RES, CHIP 22K (1005)
R416	1-208-919-81	s	RES, CHIP 22K (1005)
R418	1-208-903-81	s	RES, CHIP 4.7K (1005)
R419	1-208-903-81	s	RES, CHIP 4.7K (1005)
R421	1-208-903-81	s	RES, CHIP 4.7K (1005)
R422	1-208-903-81	s	RES, CHIP 4.7K (1005)
R427	1-208-911-81	s	RES, CHIP 10K (1005)
R428	1-208-911-81	s	RES, CHIP 10K (1005)
R430	1-208-887-81	s	RES, CHIP 1.0K (1005)
R431	1-208-887-81	s	RES, CHIP 1.0K (1005)
R432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R433	1-208-887-81	s	RES, CHIP 1.0K (1005)
R434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)
R438	1-208-903-81	s	RES, CHIP 4.7K (1005)
R439	1-208-903-81	s	RES, CHIP 4.7K (1005)
R440	1-208-903-81	s	RES, CHIP 4.7K (1005)
R442	1-208-911-81	s	RES, CHIP 10K (1005)
R443	1-208-911-81	s	RES, CHIP 10K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-887-81	s	RES, CHIP 1.0K (1005)
R446	1-208-887-81	s	RES, CHIP 1.0K (1005)
R447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R455	1-208-903-81	s	RES, CHIP 4.7K (1005)
R456	1-208-903-81	s	RES, CHIP 4.7K (1005)
R464	1-208-887-81	s	RES, CHIP 1.0K (1005)
R465	1-208-887-81	s	RES, CHIP 1.0K (1005)
R466	1-208-887-81	s	RES, CHIP 1.0K (1005)
R467	1-208-887-81	s	RES, CHIP 1.0K (1005)
R468	1-208-887-81	s	RES, CHIP 1.0K (1005)
R469	1-208-887-81	s	RES, CHIP 1.0K (1005)
R470	1-208-911-81	s	RES, CHIP 10K (1005)
R471	1-208-911-81	s	RES, CHIP 10K (1005)
R472	1-208-911-81	s	RES, CHIP 10K (1005)
R473	1-208-911-81	s	RES, CHIP 10K (1005)
R474	1-208-911-81	s	RES, CHIP 10K (1005)
R475	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-903-81	s	RES, CHIP 4.7K (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R507	1-208-927-81	s	RES, CHIP 47K (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-863-81	s	RES, CHIP 100 (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R522	1-218-825-91	s	RES, CHIP 120 (1608)
R525	1-218-825-91	s	RES, CHIP 120 (1608)
R526	1-208-895-81	s	RES, CHIP 2.2K (1005)
R527	1-218-825-91	s	RES, CHIP 120 (1608)
R528	1-208-911-81	s	RES, CHIP 10K (1005)
R529	1-220-878-81	s	RES, CHIP 22 (1005)
R530	1-220-878-81	s	RES, CHIP 22 (1005)
R531	1-220-878-81	s	RES, CHIP 22 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-218-825-91	s	RES, CHIP 120 (1608)
R538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R539	1-208-887-81	s	RES, CHIP 1.0K (1005)
R540	1-218-825-91	s	RES, CHIP 120 (1608)
R541	1-218-825-91	s	RES, CHIP 120 (1608)
R547	1-208-863-81	s	RES, CHIP 100 (1005)
R548	1-208-863-81	s	RES, CHIP 100 (1005)
R549	1-208-863-81	s	RES, CHIP 100 (1005)
R550	1-208-903-81	s	RES, CHIP 4.7K (1005)
R551	1-208-903-81	s	RES, CHIP 4.7K (1005)
R552	1-208-903-81	s	RES, CHIP 4.7K (1005)
R553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R557	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R567	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R614	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-220-878-81	s	RES, CHIP 22 (1005)
R616	1-220-878-81	s	RES, CHIP 22 (1005)
R617	1-220-878-81	s	RES, CHIP 22 (1005)
R618	1-220-878-81	s	RES, CHIP 22 (1005)
R619	1-220-878-81	s	RES, CHIP 22 (1005)
R620	1-220-878-81	s	RES, CHIP 22 (1005)
R621	1-220-878-81	s	RES, CHIP 22 (1005)
R622	1-220-878-81	s	RES, CHIP 22 (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R625	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-220-878-81	s	RES, CHIP 22 (1005)
R627	1-208-887-81	s	RES, CHIP 1.0K (1005)
R628	1-208-863-81	s	RES, CHIP 100 (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R630	1-208-863-81	s	RES, CHIP 100 (1005)
R631	1-208-863-81	s	RES, CHIP 100 (1005)
R638	1-220-878-81	s	RES, CHIP 22 (1005)
R639	1-220-878-81	s	RES, CHIP 22 (1005)
R640	1-220-878-81	s	RES, CHIP 22 (1005)
R641	1-220-878-81	s	RES, CHIP 22 (1005)
R642	1-220-878-81	s	RES, CHIP 22 (1005)
R643	1-220-878-81	s	RES, CHIP 22 (1005)
R644	1-220-878-81	s	RES, CHIP 22 (1005)
R645	1-220-878-81	s	RES, CHIP 22 (1005)
R646	1-220-878-81	s	RES, CHIP 22 (1005)
R647	1-220-878-81	s	RES, CHIP 22 (1005)
R648	1-220-878-81	s	RES, CHIP 22 (1005)
R649	1-220-878-81	s	RES, CHIP 22 (1005)
R650	1-220-878-81	s	RES, CHIP 22 (1005)
R651	1-220-878-81	s	RES, CHIP 22 (1005)
R652	1-220-878-81	s	RES, CHIP 22 (1005)
R653	1-220-878-81	s	RES, CHIP 22 (1005)
R654	1-220-878-81	s	RES, CHIP 22 (1005)
R655	1-220-878-81	s	RES, CHIP 22 (1005)
R656	1-220-878-81	s	RES, CHIP 22 (1005)
R657	1-220-878-81	s	RES, CHIP 22 (1005)
R658	1-220-878-81	s	RES, CHIP 22 (1005)
R659	1-208-887-81	s	RES, CHIP 1.0K (1005)
R660	1-208-887-81	s	RES, CHIP 1.0K (1005)
R661	1-208-887-81	s	RES, CHIP 1.0K (1005)
R662	1-208-863-81	s	RES, CHIP 100 (1005)
R663	1-208-863-81	s	RES, CHIP 100 (1005)
R664	1-208-863-81	s	RES, CHIP 100 (1005)
R665	1-208-863-81	s	RES, CHIP 100 (1005)
R666	1-208-863-81	s	RES, CHIP 100 (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)
R703	1-220-878-81	s	RES, CHIP 22 (1005)
R704	1-220-878-81	s	RES, CHIP 22 (1005)
R705	1-220-878-81	s	RES, CHIP 22 (1005)
R706	1-220-878-81	s	RES, CHIP 22 (1005)
R707	1-220-878-81	s	RES, CHIP 22 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R709	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-220-878-81	s	RES, CHIP 22 (1005)
R711	1-220-878-81	s	RES, CHIP 22 (1005)
R712	1-220-878-81	s	RES, CHIP 22 (1005)
R713	1-220-878-81	s	RES, CHIP 22 (1005)
R714	1-220-878-81	s	RES, CHIP 22 (1005)
R715	1-220-878-81	s	RES, CHIP 22 (1005)
R716	1-220-878-81	s	RES, CHIP 22 (1005)
R717	1-220-878-81	s	RES, CHIP 22 (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R719	1-220-878-81	s	RES, CHIP 22 (1005)
R720	1-220-878-81	s	RES, CHIP 22 (1005)
R721	1-220-878-81	s	RES, CHIP 22 (1005)
R722	1-220-878-81	s	RES, CHIP 22 (1005)
R723	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R724	1-220-878-81	s	RES, CHIP 22 (1005)
R725	1-220-878-81	s	RES, CHIP 22 (1005)
R726	1-220-878-81	s	RES, CHIP 22 (1005)
R727	1-220-878-81	s	RES, CHIP 22 (1005)
R728	1-220-878-81	s	RES, CHIP 22 (1005)
R729	1-220-878-81	s	RES, CHIP 22 (1005)
R730	1-220-878-81	s	RES, CHIP 22 (1005)
R731	1-220-878-81	s	RES, CHIP 22 (1005)
R732	1-220-878-81	s	RES, CHIP 22 (1005)
R733	1-220-878-81	s	RES, CHIP 22 (1005)
R734	1-220-878-81	s	RES, CHIP 22 (1005)
R735	1-220-878-81	s	RES, CHIP 22 (1005)
R736	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R737	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R738	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R739	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R740	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R742	1-208-911-81	s	RES, CHIP 10K (1005)
R743	1-208-911-81	s	RES, CHIP 10K (1005)
R744	1-208-911-81	s	RES, CHIP 10K (1005)
R745	1-208-911-81	s	RES, CHIP 10K (1005)
R746	1-208-911-81	s	RES, CHIP 10K (1005)
R747	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-911-81	s	RES, CHIP 10K (1005)
R749	1-208-911-81	s	RES, CHIP 10K (1005)
R750	1-208-911-81	s	RES, CHIP 10K (1005)
R751	1-208-911-81	s	RES, CHIP 10K (1005)
R752	1-208-911-81	s	RES, CHIP 10K (1005)
R753	1-208-911-81	s	RES, CHIP 10K (1005)
R754	1-208-911-81	s	RES, CHIP 10K (1005)
R755	1-208-911-81	s	RES, CHIP 10K (1005)
R756	1-208-911-81	s	RES, CHIP 10K (1005)
R757	1-208-911-81	s	RES, CHIP 10K (1005)
R758	1-208-911-81	s	RES, CHIP 10K (1005)
R760	1-220-878-81	s	RES, CHIP 22 (1005)
R761	1-208-911-81	s	RES, CHIP 10K (1005)
R762	1-208-911-81	s	RES, CHIP 10K (1005)
R763	1-208-911-81	s	RES, CHIP 10K (1005)
R764	1-208-911-81	s	RES, CHIP 10K (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-911-81	s	RES, CHIP 10K (1005)
R767	1-208-911-81	s	RES, CHIP 10K (1005)
R768	1-208-911-81	s	RES, CHIP 10K (1005)
R769	1-208-911-81	s	RES, CHIP 10K (1005)
R770	1-208-911-81	s	RES, CHIP 10K (1005)
R771	1-208-911-81	s	RES, CHIP 10K (1005)
R772	1-208-911-81	s	RES, CHIP 10K (1005)
R773	1-208-911-81	s	RES, CHIP 10K (1005)
R774	1-208-911-81	s	RES, CHIP 10K (1005)
R775	1-208-911-81	s	RES, CHIP 10K (1005)
R776	1-208-903-81	s	RES, CHIP 4.7K (1005)
R779	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R780	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R782	1-208-903-81	s	RES, CHIP 4.7K (1005)
R785	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R786	1-220-878-81	s	RES, CHIP 22 (1005)
R787	1-220-878-81	s	RES, CHIP 22 (1005)
R788	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R789	1-220-878-81	s	RES, CHIP 22 (1005)
R790	1-220-878-81	s	RES, CHIP 22 (1005)
R791	1-220-878-81	s	RES, CHIP 22 (1005)
R792	1-220-878-81	s	RES, CHIP 22 (1005)
R793	1-220-878-81	s	RES, CHIP 22 (1005)
R794	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R796	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R798	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-208-935-81	s	RES, CHIP 100K (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-208-935-81	s	RES, CHIP 100K (1005)
R806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R807	1-208-935-81	s	RES, CHIP 100K (1005)
R808	1-208-911-81	s	RES, CHIP 10K (1005)
R809	1-208-935-81	s	RES, CHIP 100K (1005)
R810	1-208-935-81	s	RES, CHIP 100K (1005)
R811	1-208-935-81	s	RES, CHIP 100K (1005)
R812	1-208-935-81	s	RES, CHIP 100K (1005)
R813	1-208-935-81	s	RES, CHIP 100K (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R815	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-208-875-81	s	RES, CHIP 330 (1005)
R817	1-208-911-81	s	RES, CHIP 10K (1005)
R818	1-208-911-81	s	RES, CHIP 10K (1005)
R819	1-208-887-81	s	RES, CHIP 1.0K (1005)
R820	1-208-911-81	s	RES, CHIP 10K (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-208-911-81	s	RES, CHIP 10K (1005)
R834	1-208-911-81	s	RES, CHIP 10K (1005)
R835	1-208-911-81	s	RES, CHIP 10K (1005)
R836	1-208-911-81	s	RES, CHIP 10K (1005)
R837	1-208-911-81	s	RES, CHIP 10K (1005)
R838	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-911-81	s	RES, CHIP 10K (1005)
R840	1-208-911-81	s	RES, CHIP 10K (1005)
R841	1-208-887-81	s	RES, CHIP 1.0K (1005)
R842	1-208-871-81	s	RES, CHIP 220 (1005)
R843	1-208-871-81	s	RES, CHIP 220 (1005)
R844	1-208-887-81	s	RES, CHIP 1.0K (1005)
R845	1-208-871-81	s	RES, CHIP 220 (1005)
R846	1-208-887-81	s	RES, CHIP 1.0K (1005)
R847	1-208-911-81	s	RES, CHIP 10K (1005)
R848	1-208-911-81	s	RES, CHIP 10K (1005)
R849	1-208-911-81	s	RES, CHIP 10K (1005)
R850	1-208-911-81	s	RES, CHIP 10K (1005)
R852	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R902	1-220-878-81	s	RES, CHIP 22 (1005)
R903	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R904	1-220-878-81	s	RES, CHIP 22 (1005)
R905	1-220-878-81	s	RES, CHIP 22 (1005)
R906	1-220-878-81	s	RES, CHIP 22 (1005)
R907	1-220-878-81	s	RES, CHIP 22 (1005)
R908	1-220-878-81	s	RES, CHIP 22 (1005)
R909	1-220-878-81	s	RES, CHIP 22 (1005)
R910	1-220-878-81	s	RES, CHIP 22 (1005)
R911	1-220-878-81	s	RES, CHIP 22 (1005)
R912	1-220-878-81	s	RES, CHIP 22 (1005)
R913	1-220-878-81	s	RES, CHIP 22 (1005)
R914	1-208-911-81	s	RES, CHIP 10K (1005)
R915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1001	1-208-855-81	s	RES, CHIP 47 (1005)
R1002	1-208-855-81	s	RES, CHIP 47 (1005)
R1003	1-208-855-81	s	RES, CHIP 47 (1005)
R1004	1-208-855-81	s	RES, CHIP 47 (1005)
R1005	1-208-855-81	s	RES, CHIP 47 (1005)
R1006	1-208-855-81	s	RES, CHIP 47 (1005)
R1007	1-208-855-81	s	RES, CHIP 47 (1005)
R1008	1-208-855-81	s	RES, CHIP 47 (1005)
R1009	1-208-855-81	s	RES, CHIP 47 (1005)
R1010	1-208-855-81	s	RES, CHIP 47 (1005)
R1011	1-208-855-81	s	RES, CHIP 47 (1005)
R1012	1-208-855-81	s	RES, CHIP 47 (1005)
R1013	1-208-855-81	s	RES, CHIP 47 (1005)
R1014	1-208-855-81	s	RES, CHIP 47 (1005)
R1015	1-208-855-81	s	RES, CHIP 47 (1005)
R1016	1-208-855-81	s	RES, CHIP 47 (1005)
R1017	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1018	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1019	1-208-860-81	s	RES, CHIP 75 (1005)
R1020	1-208-860-81	s	RES, CHIP 75 (1005)
R1021	1-208-860-81	s	RES, CHIP 75 (1005)
R1022	1-208-860-81	s	RES, CHIP 75 (1005)
R1023	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1024	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1027	1-208-935-81	s	RES, CHIP 100K (1005)
R1028	1-208-935-81	s	RES, CHIP 100K (1005)
R1029	1-208-911-81	s	RES, CHIP 10K (1005)
R1031	1-208-911-81	s	RES, CHIP 10K (1005)
R1034	1-208-911-81	s	RES, CHIP 10K (1005)
R1036	1-208-911-81	s	RES, CHIP 10K (1005)
R1038	1-208-911-81	s	RES, CHIP 10K (1005)
R1040	1-208-911-81	s	RES, CHIP 10K (1005)
R1041	1-208-879-81	s	RES, CHIP 470 (1005)
R1042	1-220-878-81	s	RES, CHIP 22 (1005)
R1043	1-220-878-81	s	RES, CHIP 22 (1005)
R1044	1-220-878-81	s	RES, CHIP 22 (1005)
R1045	1-220-878-81	s	RES, CHIP 22 (1005)
R1046	1-220-878-81	s	RES, CHIP 22 (1005)
R1047	1-220-878-81	s	RES, CHIP 22 (1005)
R1048	1-220-878-81	s	RES, CHIP 22 (1005)
R1049	1-220-878-81	s	RES, CHIP 22 (1005)
R1050	1-220-878-81	s	RES, CHIP 22 (1005)
R1051	1-220-878-81	s	RES, CHIP 22 (1005)
R1052	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1053	1-220-878-81	s	RES, CHIP 22 (1005)
R1054	1-220-878-81	s	RES, CHIP 22 (1005)
R1055	1-220-878-81	s	RES, CHIP 22 (1005)
R1056	1-220-878-81	s	RES, CHIP 22 (1005)
R1057	1-220-878-81	s	RES, CHIP 22 (1005)
R1058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1061	1-220-878-81	s	RES, CHIP 22 (1005)
R1062	1-220-878-81	s	RES, CHIP 22 (1005)
R1063	1-220-878-81	s	RES, CHIP 22 (1005)
R1064	1-220-878-81	s	RES, CHIP 22 (1005)
R1065	1-220-878-81	s	RES, CHIP 22 (1005)
R1066	1-220-878-81	s	RES, CHIP 22 (1005)
R1067	1-220-878-81	s	RES, CHIP 22 (1005)
R1068	1-220-878-81	s	RES, CHIP 22 (1005)
R1069	1-220-878-81	s	RES, CHIP 22 (1005)
R1070	1-220-878-81	s	RES, CHIP 22 (1005)
R1071	1-220-878-81	s	RES, CHIP 22 (1005)
R1072	1-220-878-81	s	RES, CHIP 22 (1005)
R1073	1-220-878-81	s	RES, CHIP 22 (1005)
R1074	1-220-878-81	s	RES, CHIP 22 (1005)
R1075	1-220-878-81	s	RES, CHIP 22 (1005)
R1076	1-220-878-81	s	RES, CHIP 22 (1005)
R1077	1-220-878-81	s	RES, CHIP 22 (1005)
R1078	1-220-878-81	s	RES, CHIP 22 (1005)
R1079	1-220-878-81	s	RES, CHIP 22 (1005)
R1080	1-220-878-81	s	RES, CHIP 22 (1005)
R1081	1-220-878-81	s	RES, CHIP 22 (1005)
R1082	1-220-878-81	s	RES, CHIP 22 (1005)
R1083	1-220-878-81	s	RES, CHIP 22 (1005)
R1084	1-220-878-81	s	RES, CHIP 22 (1005)
R1201	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-208-911-81	s	RES, CHIP 10K (1005)
R1204	1-208-911-81	s	RES, CHIP 10K (1005)
R1205	1-208-911-81	s	RES, CHIP 10K (1005)
R1206	1-208-911-81	s	RES, CHIP 10K (1005)
R1208	1-208-911-81	s	RES, CHIP 10K (1005)
R1215	1-208-911-81	s	RES, CHIP 10K (1005)
R1216	1-208-911-81	s	RES, CHIP 10K (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1222	1-208-911-81	s	RES, CHIP 10K (1005)
R1223	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-208-911-81	s	RES, CHIP 10K (1005)
R1230	1-208-911-81	s	RES, CHIP 10K (1005)
R1232	1-208-911-81	s	RES, CHIP 10K (1005)
R1236	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1239	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1312	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1404	1-220-878-81	s	RES, CHIP 22 (1005)
R1405	1-220-878-81	s	RES, CHIP 22 (1005)
R1406	1-220-878-81	s	RES, CHIP 22 (1005)
R1407	1-220-878-81	s	RES, CHIP 22 (1005)
R1408	1-220-878-81	s	RES, CHIP 22 (1005)
R1409	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1410	1-208-911-81	s	RES, CHIP 10K (1005)
R1411	1-208-911-81	s	RES, CHIP 10K (1005)
R1412	1-208-911-81	s	RES, CHIP 10K (1005)
R1413	1-208-911-81	s	RES, CHIP 10K (1005)
R1414	1-208-911-81	s	RES, CHIP 10K (1005)
R1415	1-208-911-81	s	RES, CHIP 10K (1005)
R1416	1-208-911-81	s	RES, CHIP 10K (1005)
R1417	1-208-911-81	s	RES, CHIP 10K (1005)
R1418	1-208-911-81	s	RES, CHIP 10K (1005)
R1419	1-208-911-81	s	RES, CHIP 10K (1005)
R1420	1-208-911-81	s	RES, CHIP 10K (1005)
R1421	1-208-911-81	s	RES, CHIP 10K (1005)
R1422	1-208-911-81	s	RES, CHIP 10K (1005)
R1423	1-208-911-81	s	RES, CHIP 10K (1005)
R1424	1-208-911-81	s	RES, CHIP 10K (1005)
R1425	1-208-911-81	s	RES, CHIP 10K (1005)
R1426	1-208-911-81	s	RES, CHIP 10K (1005)
R1427	1-208-911-81	s	RES, CHIP 10K (1005)
R1428	1-208-911-81	s	RES, CHIP 10K (1005)
R1429	1-208-911-81	s	RES, CHIP 10K (1005)
R1430	1-208-911-81	s	RES, CHIP 10K (1005)
R1431	1-208-911-81	s	RES, CHIP 10K (1005)
R1432	1-208-911-81	s	RES, CHIP 10K (1005)
R1433	1-208-911-81	s	RES, CHIP 10K (1005)
R1434	1-208-911-81	s	RES, CHIP 10K (1005)
R1435	1-208-911-81	s	RES, CHIP 10K (1005)
R1436	1-208-911-81	s	RES, CHIP 10K (1005)
R1437	1-208-911-81	s	RES, CHIP 10K (1005)
R1438	1-208-911-81	s	RES, CHIP 10K (1005)
R1439	1-208-911-81	s	RES, CHIP 10K (1005)
R1440	1-208-911-81	s	RES, CHIP 10K (1005)
R1441	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1447	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1461	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1462	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1463	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1464	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1465	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1466	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1467	1-208-911-81	s	RES, CHIP 10K (1005)
R1468	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1469	1-208-911-81	s	RES, CHIP 10K (1005)
R1470	1-208-879-81	s	RES, CHIP 470 (1005)
R1471	1-208-911-81	s	RES, CHIP 10K (1005)
R1472	1-208-879-81	s	RES, CHIP 470 (1005)
R1473	1-208-911-81	s	RES, CHIP 10K (1005)
R1474	1-208-879-81	s	RES, CHIP 470 (1005)
R1475	1-208-879-81	s	RES, CHIP 470 (1005)
R1476	1-208-911-81	s	RES, CHIP 10K (1005)
R1477	1-208-911-81	s	RES, CHIP 10K (1005)
R1478	1-208-879-81	s	RES, CHIP 470 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1479	1-208-911-81	s	RES, CHIP 10K (1005)
R1480	1-208-911-81	s	RES, CHIP 10K (1005)
R1481	1-208-879-81	s	RES, CHIP 470 (1005)
R1482	1-208-875-81	s	RES, CHIP 330 (1005)
R1483	1-208-911-81	s	RES, CHIP 10K (1005)
R1484	1-208-911-81	s	RES, CHIP 10K (1005)
R1485	1-208-879-81	s	RES, CHIP 470 (1005)
R1486	1-208-911-81	s	RES, CHIP 10K (1005)
R1487	1-208-911-81	s	RES, CHIP 10K (1005)
R1488	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1489	1-208-911-81	s	RES, CHIP 10K (1005)
R1490	1-208-911-81	s	RES, CHIP 10K (1005)
R1491	1-208-911-81	s	RES, CHIP 10K (1005)
R1492	1-208-911-81	s	RES, CHIP 10K (1005)
R1493	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1494	1-220-878-81	s	RES, CHIP 22 (1005)
R1495	1-220-878-81	s	RES, CHIP 22 (1005)
R1496	1-220-878-81	s	RES, CHIP 22 (1005)
R1497	1-220-878-81	s	RES, CHIP 22 (1005)
R1498	1-220-878-81	s	RES, CHIP 22 (1005)
R1499	1-220-878-81	s	RES, CHIP 22 (1005)
R1500	1-220-878-81	s	RES, CHIP 22 (1005)
R1501	1-220-878-81	s	RES, CHIP 22 (1005)
R1502	1-220-878-81	s	RES, CHIP 22 (1005)
R1503	1-220-878-81	s	RES, CHIP 22 (1005)
R1504	1-220-878-81	s	RES, CHIP 22 (1005)
R1505	1-220-878-81	s	RES, CHIP 22 (1005)
R1506	1-220-878-81	s	RES, CHIP 22 (1005)
R1507	1-220-878-81	s	RES, CHIP 22 (1005)
R1508	1-220-878-81	s	RES, CHIP 22 (1005)
R1509	1-220-878-81	s	RES, CHIP 22 (1005)
R1510	1-220-878-81	s	RES, CHIP 22 (1005)
R1511	1-220-878-81	s	RES, CHIP 22 (1005)
R1512	1-208-911-81	s	RES, CHIP 10K (1005)
R1513	1-208-911-81	s	RES, CHIP 10K (1005)
R1514	1-208-911-81	s	RES, CHIP 10K (1005)
R1515	1-208-911-81	s	RES, CHIP 10K (1005)
R1516	1-208-911-81	s	RES, CHIP 10K (1005)
R1517	1-208-911-81	s	RES, CHIP 10K (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1521	1-208-911-81	s	RES, CHIP 10K (1005)
R1522	1-208-911-81	s	RES, CHIP 10K (1005)
R1523	1-208-911-81	s	RES, CHIP 10K (1005)
R1524	1-208-911-81	s	RES, CHIP 10K (1005)
R1525	1-208-911-81	s	RES, CHIP 10K (1005)
R1526	1-208-911-81	s	RES, CHIP 10K (1005)
R1527	1-208-911-81	s	RES, CHIP 10K (1005)
R1528	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1529	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1530	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1531	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1532	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1533	1-208-911-81	s	RES, CHIP 10K (1005)
R1534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1535	1-208-911-81	s	RES, CHIP 10K (1005)
R1536	1-208-911-81	s	RES, CHIP 10K (1005)
R1537	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1539	1-208-911-81	s	RES, CHIP 10K (1005)
R1540	1-208-911-81	s	RES, CHIP 10K (1005)
R1541	1-208-911-81	s	RES, CHIP 10K (1005)
R1543	1-208-911-81	s	RES, CHIP 10K (1005)
R1544	1-208-911-81	s	RES, CHIP 10K (1005)
R1545	1-208-911-81	s	RES, CHIP 10K (1005)
R1546	1-208-911-81	s	RES, CHIP 10K (1005)
R1547	1-208-911-81	s	RES, CHIP 10K (1005)
R1548	1-208-911-81	s	RES, CHIP 10K (1005)
R1549	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1552	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1553	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1554	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1555	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1556	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1559	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1560	1-208-927-81	s	RES, CHIP 47K (1005)
R1561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1608	1-220-878-81	s	RES, CHIP 22 (1005)
R1609	1-220-878-81	s	RES, CHIP 22 (1005)
R1610	1-220-878-81	s	RES, CHIP 22 (1005)
R1611	1-220-878-81	s	RES, CHIP 22 (1005)
R1612	1-220-878-81	s	RES, CHIP 22 (1005)
R1613	1-220-878-81	s	RES, CHIP 22 (1005)
R1614	1-220-878-81	s	RES, CHIP 22 (1005)
R1615	1-220-878-81	s	RES, CHIP 22 (1005)
R1616	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1618	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1619	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1620	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1621	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1642	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1643	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1713	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1715	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1717	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1719	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1721	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1723	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1726	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1727	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1728	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1729	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1738	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1739	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1741	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1743	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1745	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1747	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1748	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1749	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1750	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1758	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1759	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1761	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1763	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1765	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1767	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1768	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1769	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1770	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1805	1-208-855-81	s	RES, CHIP 47 (1005)
R1806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1807	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1811	1-208-855-81	s	RES, CHIP 47 (1005)
R1812	1-208-855-81	s	RES, CHIP 47 (1005)
R1813	1-208-855-81	s	RES, CHIP 47 (1005)
R1814	1-208-855-81	s	RES, CHIP 47 (1005)
R1815	1-208-855-81	s	RES, CHIP 47 (1005)
R1816	1-208-855-81	s	RES, CHIP 47 (1005)
R1817	1-208-855-81	s	RES, CHIP 47 (1005)
R1818	1-208-855-81	s	RES, CHIP 47 (1005)
R1819	1-208-855-81	s	RES, CHIP 47 (1005)
R1820	1-208-855-81	s	RES, CHIP 47 (1005)
R1821	1-208-855-81	s	RES, CHIP 47 (1005)
R1822	1-208-855-81	s	RES, CHIP 47 (1005)
R1823	1-208-855-81	s	RES, CHIP 47 (1005)
R1824	1-208-855-81	s	RES, CHIP 47 (1005)
R1825	1-208-855-81	s	RES, CHIP 47 (1005)
R1826	1-208-855-81	s	RES, CHIP 47 (1005)
R1827	1-208-855-81	s	RES, CHIP 47 (1005)
R1828	1-208-855-81	s	RES, CHIP 47 (1005)
R1829	1-208-855-81	s	RES, CHIP 47 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1830	1-208-855-81	s	RES, CHIP 47 (1005)
R1831	1-208-855-81	s	RES, CHIP 47 (1005)
R1832	1-208-855-81	s	RES, CHIP 47 (1005)
R1833	1-208-855-81	s	RES, CHIP 47 (1005)
R1834	1-208-855-81	s	RES, CHIP 47 (1005)
R1835	1-208-855-81	s	RES, CHIP 47 (1005)
R1836	1-208-855-81	s	RES, CHIP 47 (1005)
R1837	1-208-855-81	s	RES, CHIP 47 (1005)
R1838	1-208-855-81	s	RES, CHIP 47 (1005)
R1839	1-208-855-81	s	RES, CHIP 47 (1005)
R1840	1-208-855-81	s	RES, CHIP 47 (1005)
R1841	1-208-855-81	s	RES, CHIP 47 (1005)
R1845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1846	1-208-855-81	s	RES, CHIP 47 (1005)
R1847	1-208-855-81	s	RES, CHIP 47 (1005)
R1849	1-208-855-81	s	RES, CHIP 47 (1005)
R1850	1-208-855-81	s	RES, CHIP 47 (1005)
R1851	1-208-855-81	s	RES, CHIP 47 (1005)
R1853	1-208-855-81	s	RES, CHIP 47 (1005)
R2001	1-208-927-81	s	RES, CHIP 47K (1005)
R2002	1-208-927-81	s	RES, CHIP 47K (1005)
R2004	1-208-911-81	s	RES, CHIP 10K (1005)
R2005	1-208-911-81	s	RES, CHIP 10K (1005)
R2007	1-208-927-81	s	RES, CHIP 47K (1005)
R2008	1-208-927-81	s	RES, CHIP 47K (1005)
R2010	1-208-911-81	s	RES, CHIP 10K (1005)
R2012	1-208-911-81	s	RES, CHIP 10K (1005)
R2013	1-220-878-81	s	RES, CHIP 22 (1005)
R2014	1-220-878-81	s	RES, CHIP 22 (1005)
R2015	1-220-878-81	s	RES, CHIP 22 (1005)
R2016	1-220-878-81	s	RES, CHIP 22 (1005)
R2017	1-220-878-81	s	RES, CHIP 22 (1005)
R2018	1-220-878-81	s	RES, CHIP 22 (1005)
R2019	1-220-878-81	s	RES, CHIP 22 (1005)
R2020	1-220-878-81	s	RES, CHIP 22 (1005)
R2022	1-208-911-81	s	RES, CHIP 10K (1005)
R2024	1-208-911-81	s	RES, CHIP 10K (1005)
R2026	1-208-911-81	s	RES, CHIP 10K (1005)
R2028	1-208-911-81	s	RES, CHIP 10K (1005)
R2029	1-208-927-81	s	RES, CHIP 47K (1005)
R2030	1-208-927-81	s	RES, CHIP 47K (1005)
R2032	1-208-911-81	s	RES, CHIP 10K (1005)
R2033	1-208-911-81	s	RES, CHIP 10K (1005)
R2035	1-208-927-81	s	RES, CHIP 47K (1005)
R2036	1-208-927-81	s	RES, CHIP 47K (1005)
R2037	1-208-911-81	s	RES, CHIP 10K (1005)
R2039	1-208-911-81	s	RES, CHIP 10K (1005)
R2041	1-220-878-81	s	RES, CHIP 22 (1005)
R2042	1-220-878-81	s	RES, CHIP 22 (1005)
R2043	1-220-878-81	s	RES, CHIP 22 (1005)
R2044	1-220-878-81	s	RES, CHIP 22 (1005)
R2045	1-220-878-81	s	RES, CHIP 22 (1005)
R2046	1-220-878-81	s	RES, CHIP 22 (1005)
R2047	1-220-878-81	s	RES, CHIP 22 (1005)
R2048	1-220-878-81	s	RES, CHIP 22 (1005)
R2050	1-208-911-81	s	RES, CHIP 10K (1005)
R2052	1-208-911-81	s	RES, CHIP 10K (1005)
R2054	1-208-911-81	s	RES, CHIP 10K (1005)
R2056	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R2201	1-208-863-81	s	RES, CHIP 100 (1005)
R2202	1-208-863-81	s	RES, CHIP 100 (1005)
R2203	1-208-863-81	s	RES, CHIP 100 (1005)
R2204	1-208-863-81	s	RES, CHIP 100 (1005)
R2205	1-208-863-81	s	RES, CHIP 100 (1005)
R2251	1-208-863-81	s	RES, CHIP 100 (1005)
R2252	1-208-863-81	s	RES, CHIP 100 (1005)
R2253	1-208-863-81	s	RES, CHIP 100 (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2401	1-220-878-81	s	RES, CHIP 22 (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)
R2502	1-220-878-81	s	RES, CHIP 22 (1005)
R2601	1-208-863-81	s	RES, CHIP 100 (1005)
R2602	1-208-863-81	s	RES, CHIP 100 (1005)
R2603	1-208-863-81	s	RES, CHIP 100 (1005)
R2604	1-208-863-81	s	RES, CHIP 100 (1005)
R2701	1-208-863-81	s	RES, CHIP 100 (1005)
R2702	1-208-863-81	s	RES, CHIP 100 (1005)
R2703	1-208-863-81	s	RES, CHIP 100 (1005)
R2704	1-208-863-81	s	RES, CHIP 100 (1005)
R2705	1-208-863-81	s	RES, CHIP 100 (1005)
R2801	1-208-863-81	s	RES, CHIP 100 (1005)
R2802	1-208-863-81	s	RES, CHIP 100 (1005)
R2803	1-208-911-81	s	RES, CHIP 10K (1005)
R2804	1-208-911-81	s	RES, CHIP 10K (1005)
R2805	1-208-855-81	s	RES, CHIP 47 (1005)
R2806	1-208-855-81	s	RES, CHIP 47 (1005)
R2807	1-220-878-81	s	RES, CHIP 22 (1005)
R2808	1-220-878-81	s	RES, CHIP 22 (1005)
R2809	1-220-878-81	s	RES, CHIP 22 (1005)
R2810	1-220-878-81	s	RES, CHIP 22 (1005)
R2811	1-220-878-81	s	RES, CHIP 22 (1005)
R2812	1-220-878-81	s	RES, CHIP 22 (1005)
R2813	1-220-878-81	s	RES, CHIP 22 (1005)
R2814	1-220-878-81	s	RES, CHIP 22 (1005)
R2815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2901	1-208-863-81	s	RES, CHIP 100 (1005)
R2902	1-208-863-81	s	RES, CHIP 100 (1005)
R2903	1-220-878-81	s	RES, CHIP 22 (1005)
R2904	1-220-878-81	s	RES, CHIP 22 (1005)
R2905	1-220-878-81	s	RES, CHIP 22 (1005)
R2906	1-220-878-81	s	RES, CHIP 22 (1005)
R2907	1-220-878-81	s	RES, CHIP 22 (1005)
R2908	1-220-878-81	s	RES, CHIP 22 (1005)
R2909	1-220-878-81	s	RES, CHIP 22 (1005)
R2910	1-220-878-81	s	RES, CHIP 22 (1005)
R2911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2912	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3002	1-208-863-81	s	RES, CHIP 100 (1005)
R3003	1-208-911-81	s	RES, CHIP 10K (1005)
R3004	1-208-911-81	s	RES, CHIP 10K (1005)
R3005	1-208-855-81	s	RES, CHIP 47 (1005)
R3006	1-208-855-81	s	RES, CHIP 47 (1005)
R3007	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3008	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3009	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3010	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R3011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3101	1-208-863-81	s	RES, CHIP 100 (1005)
R3102	1-208-863-81	s	RES, CHIP 100 (1005)
R3103	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3201	1-208-863-81	s	RES, CHIP 100 (1005)
R3202	1-208-863-81	s	RES, CHIP 100 (1005)
R3203	1-208-911-81	s	RES, CHIP 10K (1005)
R3204	1-208-911-81	s	RES, CHIP 10K (1005)
R3205	1-208-855-81	s	RES, CHIP 47 (1005)
R3206	1-208-855-81	s	RES, CHIP 47 (1005)
R3207	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3208	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3301	1-208-863-81	s	RES, CHIP 100 (1005)
R3302	1-208-863-81	s	RES, CHIP 100 (1005)
R3303	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-208-863-81	s	RES, CHIP 100 (1005)
R3402	1-208-863-81	s	RES, CHIP 100 (1005)
R3403	1-208-911-81	s	RES, CHIP 10K (1005)
R3404	1-208-911-81	s	RES, CHIP 10K (1005)
R3405	1-208-855-81	s	RES, CHIP 47 (1005)
R3406	1-208-855-81	s	RES, CHIP 47 (1005)
R3407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3409	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3501	1-208-863-81	s	RES, CHIP 100 (1005)
R3502	1-208-863-81	s	RES, CHIP 100 (1005)
R3503	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3504	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3601	1-208-863-81	s	RES, CHIP 100 (1005)
R3602	1-208-863-81	s	RES, CHIP 100 (1005)
R3603	1-208-911-81	s	RES, CHIP 10K (1005)
R3604	1-208-911-81	s	RES, CHIP 10K (1005)
R3605	1-208-855-81	s	RES, CHIP 47 (1005)
R3606	1-208-855-81	s	RES, CHIP 47 (1005)
R3607	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3608	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3609	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3701	1-208-863-81	s	RES, CHIP 100 (1005)
R3702	1-208-863-81	s	RES, CHIP 100 (1005)
R3703	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3704	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3801	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R3802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3806	1-208-863-81	s	RES, CHIP 100 (1005)
R3807	1-208-863-81	s	RES, CHIP 100 (1005)
R3808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3812	1-208-911-81	s	RES, CHIP 10K (1005)
R3813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3814	1-208-911-81	s	RES, CHIP 10K (1005)
R3815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3816	1-208-911-81	s	RES, CHIP 10K (1005)
R3817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3818	1-208-911-81	s	RES, CHIP 10K (1005)
R3819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3901	1-208-911-81	s	RES, CHIP 10K (1005)
R3902	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3903	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3904	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3906	1-208-863-81	s	RES, CHIP 100 (1005)
R3907	1-208-863-81	s	RES, CHIP 100 (1005)
R3908	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3909	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3910	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3912	1-208-911-81	s	RES, CHIP 10K (1005)
R3914	1-208-911-81	s	RES, CHIP 10K (1005)
R3915	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3916	1-208-911-81	s	RES, CHIP 10K (1005)
R3917	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3918	1-208-911-81	s	RES, CHIP 10K (1005)
R3919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4001	1-208-911-81	s	RES, CHIP 10K (1005)
R4002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4006	1-208-863-81	s	RES, CHIP 100 (1005)
R4007	1-208-863-81	s	RES, CHIP 100 (1005)
R4008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4012	1-208-911-81	s	RES, CHIP 10K (1005)
R4013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4014	1-208-911-81	s	RES, CHIP 10K (1005)
R4016	1-208-911-81	s	RES, CHIP 10K (1005)
R4017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4018	1-208-911-81	s	RES, CHIP 10K (1005)
R4019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4101	1-208-911-81	s	RES, CHIP 10K (1005)
R4102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4105	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R4106	1-208-863-81	s	RES, CHIP 100 (1005)
R4107	1-208-863-81	s	RES, CHIP 100 (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-208-911-81	s	RES, CHIP 10K (1005)
R4114	1-208-911-81	s	RES, CHIP 10K (1005)
R4116	1-208-911-81	s	RES, CHIP 10K (1005)
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-208-911-81	s	RES, CHIP 10K (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4201	1-208-911-81	s	RES, CHIP 10K (1005)
R4202	1-208-911-81	s	RES, CHIP 10K (1005)
R4203	1-208-911-81	s	RES, CHIP 10K (1005)
R4204	1-208-911-81	s	RES, CHIP 10K (1005)
R4205	1-208-911-81	s	RES, CHIP 10K (1005)
R4206	1-208-863-81	s	RES, CHIP 100 (1005)
R4207	1-208-863-81	s	RES, CHIP 100 (1005)
R4208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4212	1-208-911-81	s	RES, CHIP 10K (1005)
R4213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4214	1-208-911-81	s	RES, CHIP 10K (1005)
R4215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4216	1-208-911-81	s	RES, CHIP 10K (1005)
R4218	1-208-911-81	s	RES, CHIP 10K (1005)
R4219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4303	1-208-911-81	s	RES, CHIP 10K (1005)
R4304	1-208-911-81	s	RES, CHIP 10K (1005)
R4305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4501	1-208-911-81	s	RES, CHIP 10K (1005)
R4503	1-208-911-81	s	RES, CHIP 10K (1005)
R4504	1-208-911-81	s	RES, CHIP 10K (1005)
R4505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4701	1-208-911-81	s	RES, CHIP 10K (1005)
R4703	1-208-911-81	s	RES, CHIP 10K (1005)
R4705	1-208-911-81	s	RES, CHIP 10K (1005)
R4707	1-208-911-81	s	RES, CHIP 10K (1005)
R4709	1-208-911-81	s	RES, CHIP 10K (1005)
R4710	1-208-911-81	s	RES, CHIP 10K (1005)
R4711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5001	1-208-911-81	s	RES, CHIP 10K (1005)
R5002	1-208-911-81	s	RES, CHIP 10K (1005)
R5003	1-208-855-81	s	RES, CHIP 47 (1005)
R5004	1-208-855-81	s	RES, CHIP 47 (1005)
R5005	1-208-855-81	s	RES, CHIP 47 (1005)
R5006	1-208-855-81	s	RES, CHIP 47 (1005)
R5007	1-208-855-81	s	RES, CHIP 47 (1005)
R5008	1-208-855-81	s	RES, CHIP 47 (1005)
R5009	1-208-855-81	s	RES, CHIP 47 (1005)
R5010	1-208-855-81	s	RES, CHIP 47 (1005)
R5011	1-208-855-81	s	RES, CHIP 47 (1005)
R5012	1-208-855-81	s	RES, CHIP 47 (1005)
R5013	1-208-855-81	s	RES, CHIP 47 (1005)
R5014	1-208-855-81	s	RES, CHIP 47 (1005)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R5019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5201	1-208-855-81	s	RES, CHIP 47 (1005)
R5202	1-208-855-81	s	RES, CHIP 47 (1005)
R5203	1-208-855-81	s	RES, CHIP 47 (1005)
R5204	1-208-855-81	s	RES, CHIP 47 (1005)
R5205	1-208-855-81	s	RES, CHIP 47 (1005)
R5206	1-208-855-81	s	RES, CHIP 47 (1005)
R5207	1-208-855-81	s	RES, CHIP 47 (1005)
R5208	1-208-855-81	s	RES, CHIP 47 (1005)
R5209	1-208-855-81	s	RES, CHIP 47 (1005)
R5210	1-208-855-81	s	RES, CHIP 47 (1005)
R5211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5215	1-208-855-81	s	RES, CHIP 47 (1005)
R5216	1-208-855-81	s	RES, CHIP 47 (1005)
R5217	1-208-855-81	s	RES, CHIP 47 (1005)
R5218	1-208-855-81	s	RES, CHIP 47 (1005)
R5219	1-208-855-81	s	RES, CHIP 47 (1005)
R5220	1-208-855-81	s	RES, CHIP 47 (1005)
R5221	1-208-855-81	s	RES, CHIP 47 (1005)
R5222	1-208-855-81	s	RES, CHIP 47 (1005)
R5223	1-208-855-81	s	RES, CHIP 47 (1005)
R5224	1-208-855-81	s	RES, CHIP 47 (1005)
R5401	1-208-855-81	s	RES, CHIP 47 (1005)
R5402	1-208-855-81	s	RES, CHIP 47 (1005)
R5403	1-208-855-81	s	RES, CHIP 47 (1005)
R5404	1-208-855-81	s	RES, CHIP 47 (1005)
R5405	1-208-855-81	s	RES, CHIP 47 (1005)
R5406	1-208-855-81	s	RES, CHIP 47 (1005)
R5407	1-208-855-81	s	RES, CHIP 47 (1005)
R5408	1-208-855-81	s	RES, CHIP 47 (1005)
R5409	1-208-855-81	s	RES, CHIP 47 (1005)
R5410	1-208-855-81	s	RES, CHIP 47 (1005)
R5411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5415	1-208-855-81	s	RES, CHIP 47 (1005)
R5416	1-208-855-81	s	RES, CHIP 47 (1005)
R5417	1-208-855-81	s	RES, CHIP 47 (1005)
R5418	1-208-855-81	s	RES, CHIP 47 (1005)
R5419	1-208-855-81	s	RES, CHIP 47 (1005)
R5420	1-208-855-81	s	RES, CHIP 47 (1005)
R5421	1-208-855-81	s	RES, CHIP 47 (1005)
R5422	1-208-855-81	s	RES, CHIP 47 (1005)
R5423	1-208-855-81	s	RES, CHIP 47 (1005)
R5424	1-208-855-81	s	RES, CHIP 47 (1005)
RB701	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB702	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB703	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB704	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB918	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB919	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB920	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB921	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB922	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB923	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB924	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB925	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB926	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1116	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1117	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1119	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1120	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1121	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1122	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1123	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1124	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1125	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1151	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1152	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1153	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1154	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1155	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1156	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1157	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1158	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1159	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1160	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1161	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1162	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1163	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1164	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(MIX-53 BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB1165	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1166	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1167	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1168	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1169	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1170	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
S901	1-771-721-21	s	SWITCH, TACTILE
S902	1-786-277-21	s	SWITCH, TACTILE
T1001	1-443-851-21	s	GIGABIT MAGNETIC MODULE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP210	1-535-877-22	s	CHIP, CHECKER
TP211	1-535-877-22	s	CHIP, CHECKER
TP212	1-535-877-22	s	CHIP, CHECKER
TP213	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP405	1-535-877-22	s	CHIP, CHECKER
TP406	1-535-877-22	s	CHIP, CHECKER
TP407	1-535-877-22	s	CHIP, CHECKER
TP408	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1002	1-535-877-22	s	CHIP, CHECKER
X501	1-813-488-11	s	OSCILLATOR, CRYSTAL

MY-118 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-312-A	s	MOUNTED CIRCUIT BOARD, MY-118
1pc	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
2pcs	3-561-426-01	s	CUSHION
8pcs	4-143-557-01	s	SPRING, COMPRESSION
8pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
1pc	4-187-619-01	s	SHEET,RADIATION(25X25X2)
3pcs	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
2pcs	6-714-073-01	s	IC 88E1118R-A0-NNC2C000
1pc	7-626-320-61	s	PIN, SPRING 3X18
4pcs	7-682-549-09	s	SCREW +B 3X10
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C200	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C201	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C210	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C218	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C220	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C228	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C230	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C238	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C243	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C244	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C245	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C246	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C247	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C249	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C300	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C305	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C306	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C310	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C311	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C312	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C313	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C314	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C315	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C316	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C320	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C321	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C322	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C323	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C324	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C325	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C326	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C330	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C331	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C332	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C333	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C334	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C335	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C336	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C400	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C403	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C404	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C409	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C410	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C413	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C415	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C416	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C450	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C453	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C454	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C500	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C501	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C502	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1007	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1024	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1026	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1028	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1032	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1054	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1059	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1062	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1065	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1066	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1067	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1069	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1071	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1075	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1079	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1083	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1085	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1086	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1087	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1088	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1089	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1090	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1092	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1094	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1095	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1096	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1097	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1098	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1099	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1100	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1108	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1137	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1140	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1142	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1147	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1148	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1149	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1150	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1151	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1153	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1156	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1157	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1158	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1160	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1165	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1167	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1168	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1169	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1170	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1171	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1172	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1173	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1176	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1177	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1178	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1180	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1182	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1184	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1186	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1188	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1207	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1224	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1255	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1257	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1260	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1262	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1264	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1266	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1267	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1268	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1269	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1271	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1275	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1276	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1280	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1281	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1283	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1285	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1286	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1287	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1288	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1289	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1290	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1291	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1292	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1293	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1294	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1295	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1296	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1297	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1298	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1299	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1308	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1355	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1356	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1373	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C1374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1383	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1385	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1386	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1388	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1500	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1501	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1523	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1524	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1528	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1570	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1700	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1702	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1703	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1704	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1705	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1706	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1707	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1708	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1709	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1710	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1711	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1712	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1713	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1714	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1715	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1716	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1717	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1718	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1719	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1720	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1721	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1722	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1723	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1724	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1725	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1726	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1727	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1728	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1729	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1730	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1737	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1738	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1742	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1743	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1747	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1748	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1749	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1752	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1757	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1758	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1759	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1760	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1761	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1762	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1763	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1765	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1766	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1768	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1769	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1770	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1771	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1772	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1773	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1774	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1777	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1778	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1779	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1780	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1781	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1782	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1783	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1784	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1785	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1786	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1787	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1788	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1789	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1790	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1791	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1792	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1793	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1800	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1801	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1802	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1803	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1804	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1805	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1806	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1807	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1808	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1810	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1811	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1813	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1815	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1816	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1817	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1818	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1819	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1840	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1841	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1843	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1845	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1846	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1847	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2007	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2024	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2026	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2028	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2032	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2054	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2059	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2062	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2065	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2066	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2067	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2069	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2071	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2075	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2079	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2083	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2085	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2086	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2087	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2088	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2089	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2090	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2092	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2094	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2095	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2096	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2097	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2098	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2099	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2100	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2108	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2137	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2140	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2142	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2147	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2148	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2149	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2150	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2151	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2153	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2156	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2157	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2158	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2160	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2165	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2167	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2168	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2169	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2170	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2171	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2172	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2173	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2176	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2177	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2178	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2180	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2182	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2184	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2186	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2188	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2224	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2255	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2257	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2260	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2262	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2264	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2266	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2267	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2268	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2269	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2271	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2275	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2276	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2280	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2281	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2283	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2285	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2286	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2287	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2288	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2289	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2290	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2291	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2292	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2293	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2294	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2295	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2296	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2297	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2298	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2299	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2308	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2355	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2356	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2373	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C2374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2383	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2385	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2386	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2388	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2500	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2501	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2523	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2524	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2528	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2538	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2570	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C2571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2800	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2801	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2802	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2803	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2804	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2805	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2806	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2807	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2808	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2810	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2811	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2813	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2815	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2816	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2817	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2818	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2819	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2843	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2845	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3000	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3006	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C3100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3105	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C3107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3504	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3510	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3511	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3513	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3515	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3517	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3519	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3521	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3523	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3525	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C3527	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3626	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3627	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3628	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3631	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3632	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3633	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3634	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3635	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3636	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3639	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3640	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3641	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3643	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3645	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3700	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3900	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4004	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4005	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4006	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4007	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4016	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C4021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4025	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4026	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4027	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4028	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4032	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5000	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5001	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5005	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5009	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C5010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5014	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5024	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5026	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
CN3003	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN3004	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN3900	1-770-627-21	s	PIN, CONNECTOR 10P
CN4000	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D200	8-719-069-28	s	DI 1SS400FJTE61
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	6-502-197-01	s	DI SML-D12M8WT86SM
D400	8-719-069-28	s	DI 1SS400FJTE61
D401	8-719-069-28	s	DI 1SS400FJTE61
D402	8-719-069-28	s	DI 1SS400FJTE61
D450	8-719-069-28	s	DI 1SS400FJTE61
D451	6-502-197-01	s	DI SML-D12M8WT86SM
D500	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-197-01	s	DI SML-D12M8WT86SM
D504	6-502-197-01	s	DI SML-D12M8WT86SM
D3100	6-502-598-01	s	DI SML-D12U8WT86
D3500	6-502-598-01	s	DI SML-D12U8WT86

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D3600	6-502-352-01	s	DI SML-522MU8WT86PQ
D3601	6-501-436-01	s	DIODE SML412BC6TT86
D3602	6-502-352-01	s	DI SML-522MU8WT86PQ
D3603	6-502-598-01	s	DI SML-D12U8WT86
D3604	6-502-598-01	s	DI SML-D12U8WT86
D3605	6-502-197-01	s	DI SML-D12M8WT86SM
D3606	6-502-197-01	s	DI SML-D12M8WT86SM
D3607	6-502-197-01	s	DI SML-D12M8WT86SM
D3608	6-502-197-01	s	DI SML-D12M8WT86SM
D3609	6-502-197-01	s	DI SML-D12M8WT86SM
D3610	6-502-197-01	s	DI SML-D12M8WT86SM
D3611	6-502-197-01	s	DI SML-D12M8WT86SM
D3612	6-502-197-01	s	DI SML-D12M8WT86SM
D3613	6-502-197-01	s	DI SML-D12M8WT86SM
D3614	6-502-197-01	s	DI SML-D12M8WT86SM
D3615	6-502-197-01	s	DI SML-D12M8WT86SM
D3616	6-502-197-01	s	DI SML-D12M8WT86SM
D3617	6-502-197-01	s	DI SML-D12M8WT86SM
D3618	6-502-197-01	s	DI SML-D12M8WT86SM
D3619	6-502-197-01	s	DI SML-D12M8WT86SM
D3620	6-502-197-01	s	DI SML-D12M8WT86SM
D4000	6-502-197-01	s	DI SML-D12M8WT86SM
D4001	6-502-197-01	s	DI SML-D12M8WT86SM
D4002	6-502-197-01	s	DI SML-D12M8WT86SM
DD200	1-487-092-11	s	DC-DC CONVERTER
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
E200	1-535-877-22	s	CHIP, CHECKER
E201	1-535-877-22	s	CHIP, CHECKER
E202	1-535-877-22	s	CHIP, CHECKER
E203	1-535-877-22	s	CHIP, CHECKER
E204	1-535-877-22	s	CHIP, CHECKER
E205	1-535-877-22	s	CHIP, CHECKER
E206	1-535-877-22	s	CHIP, CHECKER
E207	1-535-877-22	s	CHIP, CHECKER
E208	1-535-877-22	s	CHIP, CHECKER
E209	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F200	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F201	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB1500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1800	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2800	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3000	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3001	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3002	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3003	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5000	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB5002	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB5003	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC300	6-714-608-01	s	IC TPS51200DRCR
IC310	6-714-608-01	s	IC TPS51200DRCR
IC320	6-714-608-01	s	IC TPS51200DRCR
IC330	6-714-608-01	s	IC TPS51200DRCR
IC500	8-759-338-95	s	IC NJM2903V(TE2)
IC501	8-759-338-95	s	IC NJM2903V(TE2)
IC502	8-759-338-95	s	IC NJM2903V(TE2)
IC1100	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1101	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1102	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1103	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1104	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1105	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1106	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1107	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1108	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1109	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1110	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1111	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1112	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1113	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1114	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1115	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1116	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1117	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1118	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1119	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1200	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1201	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1202	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1203	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1204	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1205	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1206	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1207	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1208	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1209	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1210	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1211	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1212	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1213	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1214	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1215	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1216	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1217	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1218	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC1219	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2100	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2101	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2102	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2103	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2104	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2105	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2106	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2107	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2108	6-714-382-01	s	IC EDE1108AEBG-8E-F

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC2109	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2110	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2111	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2112	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2113	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2114	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2115	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2116	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2117	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2118	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2119	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2200	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2201	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2202	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2203	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2204	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2205	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2206	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2207	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2208	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2209	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2210	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2211	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2212	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2213	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2214	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2215	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2216	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2217	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2218	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC2219	6-714-382-01	s	IC EDE1108AEBG-8E-F
IC3000	6-705-514-01	s	IC MAX3222IPWR
IC3100	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC3101	6-708-324-01	s	IC R3112N301A-TR-FA
IC3102	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3103	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC3104	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC3105	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC3106	6-710-018-01	s	IC CAT24C02WI-GT3
IC3107	6-714-192-01	s	IC ADT75BRMZ-REEL
IC3300	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3301	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3302	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3400	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3401	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3402	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3500	6-703-238-01	s	IC TC7WZ34FK(TE85R)
IC3501	6-714-109-01	s	IC LMK03000CISQ
IC3502	6-703-238-01	s	IC TC7WZ34FK(TE85R)
IC3603	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC3604	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC3605	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC3606	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC3700	6-714-463-01	s	IC M29W256GL70N6E
IC3701	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC3900	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC4000	8-759-592-49	s	IC TC7SZ125FU(TE85R)
L400	1-414-402-41	s	INDUCTOR (SMD) 47.0UH

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1700	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1707	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1708	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1709	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1710	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1711	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1712	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1713	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1714	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1715	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1716	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1717	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1718	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1719	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1720	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1721	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1722	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1723	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1724	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1725	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1726	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L3500	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q200	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q450	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q500	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q503	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q504	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q505	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q507	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q508	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q509	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3500	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R200	1-218-985-11	s	RES, CHIP 470K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-895-81	s	RES, CHIP 2.2K (1005)
R204	1-208-927-81	s	RES, CHIP 47K (1005)
R205	1-208-927-81	s	RES, CHIP 47K (1005)
R206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R207	1-208-895-81	s	RES, CHIP 2.2K (1005)
R208	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R215	1-208-927-81	s	RES, CHIP 47K (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-935-81	s	RES, CHIP 100K (1005)
R220	1-208-903-81	s	RES, CHIP 4.7K (1005)
R221	1-208-927-81	s	RES, CHIP 47K (1005)
R222	1-208-903-81	s	RES, CHIP 4.7K (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-935-81	s	RES, CHIP 100K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R226	1-208-903-81	s	RES, CHIP 4.7K (1005)
R227	1-208-927-81	s	RES, CHIP 47K (1005)
R228	1-208-911-81	s	RES, CHIP 10K (1005)
R229	1-208-927-81	s	RES, CHIP 47K (1005)
R230	1-208-935-81	s	RES, CHIP 100K (1005)
R231	1-208-935-81	s	RES, CHIP 100K (1005)
R232	1-208-903-81	s	RES, CHIP 4.7K (1005)
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-935-81	s	RES, CHIP 100K (1005)
R303	1-208-935-81	s	RES, CHIP 100K (1005)
R310	1-208-911-81	s	RES, CHIP 10K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-935-81	s	RES, CHIP 100K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-935-81	s	RES, CHIP 100K (1005)
R400	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-208-887-81	s	RES, CHIP 1.0K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-715-11	s	RES, CHIP 22K (1005)
R404	1-208-903-81	s	RES, CHIP 4.7K (1005)
R405	1-208-903-81	s	RES, CHIP 4.7K (1005)
R406	1-208-887-81	s	RES, CHIP 1.0K (1005)
R407	1-208-887-81	s	RES, CHIP 1.0K (1005)
R408	1-208-887-81	s	RES, CHIP 1.0K (1005)
R409	1-208-903-81	s	RES, CHIP 4.7K (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R415	1-208-927-81	s	RES, CHIP 47K (1005)
R450	1-208-903-81	s	RES, CHIP 4.7K (1005)
R451	1-208-887-81	s	RES, CHIP 1.0K (1005)
R452	1-208-887-81	s	RES, CHIP 1.0K (1005)
R453	1-208-887-81	s	RES, CHIP 1.0K (1005)
R454	1-208-903-81	s	RES, CHIP 4.7K (1005)
R455	1-208-927-81	s	RES, CHIP 47K (1005)
R456	1-208-887-81	s	RES, CHIP 1.0K (1005)
R500	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-208-935-81	s	RES, CHIP 100K (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-903-81	s	RES, CHIP 4.7K (1005)
R508	1-208-895-81	s	RES, CHIP 2.2K (1005)
R509	1-208-911-81	s	RES, CHIP 10K (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R511	1-208-935-81	s	RES, CHIP 100K (1005)
R512	1-208-911-81	s	RES, CHIP 10K (1005)
R513	1-208-903-81	s	RES, CHIP 4.7K (1005)
R514	1-208-895-81	s	RES, CHIP 2.2K (1005)
R515	1-208-911-81	s	RES, CHIP 10K (1005)
R516	1-208-911-81	s	RES, CHIP 10K (1005)
R517	1-208-935-81	s	RES, CHIP 100K (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-903-81	s	RES, CHIP 4.7K (1005)
R520	1-208-895-81	s	RES, CHIP 2.2K (1005)
R521	1-208-903-81	s	RES, CHIP 4.7K (1005)
R522	1-208-911-81	s	RES, CHIP 10K (1005)
R523	1-208-911-81	s	RES, CHIP 10K (1005)
R524	1-208-935-81	s	RES, CHIP 100K (1005)
R525	1-208-911-81	s	RES, CHIP 10K (1005)
R526	1-208-903-81	s	RES, CHIP 4.7K (1005)
R527	1-208-895-81	s	RES, CHIP 2.2K (1005)
R528	1-208-715-11	s	RES, CHIP 22K (1005)
R529	1-208-911-81	s	RES, CHIP 10K (1005)
R530	1-208-935-81	s	RES, CHIP 100K (1005)
R531	1-208-911-81	s	RES, CHIP 10K (1005)
R532	1-208-903-81	s	RES, CHIP 4.7K (1005)
R533	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1000	1-208-855-81	s	RES, CHIP 47 (1005)
R1001	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1002	1-208-855-81	s	RES, CHIP 47 (1005)
R1003	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1004	1-208-871-81	s	RES, CHIP 220 (1005)
R1005	1-208-911-81	s	RES, CHIP 10K (1005)
R1006	1-220-878-81	s	RES, CHIP 22 (1005)
R1007	1-208-871-81	s	RES, CHIP 220 (1005)
R1008	1-208-911-81	s	RES, CHIP 10K (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1010	1-208-911-81	s	RES, CHIP 10K (1005)
R1011	1-220-878-81	s	RES, CHIP 22 (1005)
R1012	1-208-911-81	s	RES, CHIP 10K (1005)
R1013	1-220-878-81	s	RES, CHIP 22 (1005)
R1014	1-208-871-81	s	RES, CHIP 220 (1005)
R1015	1-208-911-81	s	RES, CHIP 10K (1005)
R1016	1-220-878-81	s	RES, CHIP 22 (1005)
R1017	1-208-871-81	s	RES, CHIP 220 (1005)
R1018	1-208-911-81	s	RES, CHIP 10K (1005)
R1019	1-220-878-81	s	RES, CHIP 22 (1005)
R1020	1-208-871-81	s	RES, CHIP 220 (1005)
R1021	1-208-911-81	s	RES, CHIP 10K (1005)
R1022	1-220-878-81	s	RES, CHIP 22 (1005)
R1023	1-208-911-81	s	RES, CHIP 10K (1005)
R1024	1-220-878-81	s	RES, CHIP 22 (1005)
R1025	1-208-911-81	s	RES, CHIP 10K (1005)
R1026	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1027	1-208-911-81	s	RES, CHIP 10K (1005)
R1028	1-220-878-81	s	RES, CHIP 22 (1005)
R1029	1-208-871-81	s	RES, CHIP 220 (1005)
R1030	1-208-911-81	s	RES, CHIP 10K (1005)
R1031	1-220-878-81	s	RES, CHIP 22 (1005)
R1032	1-208-871-81	s	RES, CHIP 220 (1005)
R1033	1-208-911-81	s	RES, CHIP 10K (1005)
R1034	1-220-878-81	s	RES, CHIP 22 (1005)
R1035	1-208-871-81	s	RES, CHIP 220 (1005)
R1036	1-208-911-81	s	RES, CHIP 10K (1005)
R1037	1-220-878-81	s	RES, CHIP 22 (1005)
R1038	1-208-911-81	s	RES, CHIP 10K (1005)
R1039	1-220-878-81	s	RES, CHIP 22 (1005)
R1040	1-208-911-81	s	RES, CHIP 10K (1005)
R1041	1-220-878-81	s	RES, CHIP 22 (1005)
R1042	1-208-911-81	s	RES, CHIP 10K (1005)
R1043	1-220-878-81	s	RES, CHIP 22 (1005)
R1044	1-208-855-81	s	RES, CHIP 47 (1005)
R1045	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1046	1-208-855-81	s	RES, CHIP 47 (1005)
R1047	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1048	1-208-871-81	s	RES, CHIP 220 (1005)
R1049	1-208-911-81	s	RES, CHIP 10K (1005)
R1050	1-220-878-81	s	RES, CHIP 22 (1005)
R1051	1-208-871-81	s	RES, CHIP 220 (1005)
R1052	1-208-911-81	s	RES, CHIP 10K (1005)
R1053	1-220-878-81	s	RES, CHIP 22 (1005)
R1054	1-208-911-81	s	RES, CHIP 10K (1005)
R1055	1-220-878-81	s	RES, CHIP 22 (1005)
R1056	1-208-911-81	s	RES, CHIP 10K (1005)
R1057	1-220-878-81	s	RES, CHIP 22 (1005)
R1058	1-220-878-81	s	RES, CHIP 22 (1005)
R1059	1-220-878-81	s	RES, CHIP 22 (1005)
R1060	1-220-878-81	s	RES, CHIP 22 (1005)
R1061	1-220-878-81	s	RES, CHIP 22 (1005)
R1062	1-220-878-81	s	RES, CHIP 22 (1005)
R1063	1-220-878-81	s	RES, CHIP 22 (1005)
R1064	1-220-878-81	s	RES, CHIP 22 (1005)
R1065	1-220-878-81	s	RES, CHIP 22 (1005)
R1066	1-220-878-81	s	RES, CHIP 22 (1005)
R1067	1-220-878-81	s	RES, CHIP 22 (1005)
R1068	1-220-878-81	s	RES, CHIP 22 (1005)
R1069	1-220-878-81	s	RES, CHIP 22 (1005)
R1070	1-220-878-81	s	RES, CHIP 22 (1005)
R1071	1-220-878-81	s	RES, CHIP 22 (1005)
R1072	1-220-878-81	s	RES, CHIP 22 (1005)
R1073	1-220-878-81	s	RES, CHIP 22 (1005)
R1074	1-220-878-81	s	RES, CHIP 22 (1005)
R1075	1-220-878-81	s	RES, CHIP 22 (1005)
R1076	1-220-878-81	s	RES, CHIP 22 (1005)
R1077	1-220-878-81	s	RES, CHIP 22 (1005)
R1078	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1079	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1080	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1081	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1204	1-208-871-81	s	RES, CHIP 220 (1005)
R1205	1-208-911-81	s	RES, CHIP 10K (1005)
R1206	1-220-878-81	s	RES, CHIP 22 (1005)
R1207	1-208-871-81	s	RES, CHIP 220 (1005)
R1208	1-208-911-81	s	RES, CHIP 10K (1005)
R1209	1-220-878-81	s	RES, CHIP 22 (1005)
R1210	1-208-911-81	s	RES, CHIP 10K (1005)
R1211	1-220-878-81	s	RES, CHIP 22 (1005)
R1212	1-208-911-81	s	RES, CHIP 10K (1005)
R1213	1-220-878-81	s	RES, CHIP 22 (1005)
R1214	1-208-871-81	s	RES, CHIP 220 (1005)
R1215	1-208-911-81	s	RES, CHIP 10K (1005)
R1216	1-220-878-81	s	RES, CHIP 22 (1005)
R1217	1-208-871-81	s	RES, CHIP 220 (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1219	1-220-878-81	s	RES, CHIP 22 (1005)
R1220	1-208-871-81	s	RES, CHIP 220 (1005)
R1221	1-208-911-81	s	RES, CHIP 10K (1005)
R1222	1-220-878-81	s	RES, CHIP 22 (1005)
R1223	1-208-911-81	s	RES, CHIP 10K (1005)
R1224	1-220-878-81	s	RES, CHIP 22 (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-220-878-81	s	RES, CHIP 22 (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1228	1-220-878-81	s	RES, CHIP 22 (1005)
R1229	1-208-871-81	s	RES, CHIP 220 (1005)
R1230	1-208-911-81	s	RES, CHIP 10K (1005)
R1231	1-220-878-81	s	RES, CHIP 22 (1005)
R1232	1-208-871-81	s	RES, CHIP 220 (1005)
R1233	1-208-911-81	s	RES, CHIP 10K (1005)
R1234	1-220-878-81	s	RES, CHIP 22 (1005)
R1235	1-208-871-81	s	RES, CHIP 220 (1005)
R1236	1-208-911-81	s	RES, CHIP 10K (1005)
R1237	1-220-878-81	s	RES, CHIP 22 (1005)
R1238	1-208-911-81	s	RES, CHIP 10K (1005)
R1239	1-220-878-81	s	RES, CHIP 22 (1005)
R1240	1-208-911-81	s	RES, CHIP 10K (1005)
R1241	1-220-878-81	s	RES, CHIP 22 (1005)
R1242	1-208-911-81	s	RES, CHIP 10K (1005)
R1243	1-220-878-81	s	RES, CHIP 22 (1005)
R1244	1-208-855-81	s	RES, CHIP 47 (1005)
R1245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1246	1-208-855-81	s	RES, CHIP 47 (1005)
R1247	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1248	1-208-871-81	s	RES, CHIP 220 (1005)
R1249	1-208-911-81	s	RES, CHIP 10K (1005)
R1250	1-220-878-81	s	RES, CHIP 22 (1005)
R1251	1-208-871-81	s	RES, CHIP 220 (1005)
R1252	1-208-911-81	s	RES, CHIP 10K (1005)
R1253	1-220-878-81	s	RES, CHIP 22 (1005)
R1254	1-208-911-81	s	RES, CHIP 10K (1005)
R1255	1-220-878-81	s	RES, CHIP 22 (1005)
R1256	1-208-911-81	s	RES, CHIP 10K (1005)
R1257	1-220-878-81	s	RES, CHIP 22 (1005)
R1258	1-220-878-81	s	RES, CHIP 22 (1005)
R1259	1-220-878-81	s	RES, CHIP 22 (1005)
R1260	1-220-878-81	s	RES, CHIP 22 (1005)
R1261	1-220-878-81	s	RES, CHIP 22 (1005)
R1262	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1263	1-220-878-81	s	RES, CHIP 22 (1005)
R1264	1-220-878-81	s	RES, CHIP 22 (1005)
R1265	1-220-878-81	s	RES, CHIP 22 (1005)
R1266	1-220-878-81	s	RES, CHIP 22 (1005)
R1267	1-220-878-81	s	RES, CHIP 22 (1005)
R1268	1-220-878-81	s	RES, CHIP 22 (1005)
R1269	1-220-878-81	s	RES, CHIP 22 (1005)
R1270	1-220-878-81	s	RES, CHIP 22 (1005)
R1271	1-220-878-81	s	RES, CHIP 22 (1005)
R1272	1-220-878-81	s	RES, CHIP 22 (1005)
R1273	1-220-878-81	s	RES, CHIP 22 (1005)
R1274	1-220-878-81	s	RES, CHIP 22 (1005)
R1275	1-220-878-81	s	RES, CHIP 22 (1005)
R1276	1-220-878-81	s	RES, CHIP 22 (1005)
R1277	1-220-878-81	s	RES, CHIP 22 (1005)
R1278	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1279	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1280	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1281	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1500	1-208-855-81	s	RES, CHIP 47 (1005)
R1501	1-208-855-81	s	RES, CHIP 47 (1005)
R1502	1-208-855-81	s	RES, CHIP 47 (1005)
R1503	1-208-855-81	s	RES, CHIP 47 (1005)
R1504	1-208-855-81	s	RES, CHIP 47 (1005)
R1505	1-208-855-81	s	RES, CHIP 47 (1005)
R1506	1-208-855-81	s	RES, CHIP 47 (1005)
R1507	1-208-855-81	s	RES, CHIP 47 (1005)
R1508	1-208-855-81	s	RES, CHIP 47 (1005)
R1509	1-208-855-81	s	RES, CHIP 47 (1005)
R1510	1-208-855-81	s	RES, CHIP 47 (1005)
R1511	1-208-855-81	s	RES, CHIP 47 (1005)
R1512	1-208-855-81	s	RES, CHIP 47 (1005)
R1513	1-208-855-81	s	RES, CHIP 47 (1005)
R1514	1-208-855-81	s	RES, CHIP 47 (1005)
R1515	1-208-855-81	s	RES, CHIP 47 (1005)
R1516	1-208-855-81	s	RES, CHIP 47 (1005)
R1517	1-208-855-81	s	RES, CHIP 47 (1005)
R1518	1-208-855-81	s	RES, CHIP 47 (1005)
R1519	1-208-855-81	s	RES, CHIP 47 (1005)
R1520	1-208-855-81	s	RES, CHIP 47 (1005)
R1521	1-208-855-81	s	RES, CHIP 47 (1005)
R1522	1-208-855-81	s	RES, CHIP 47 (1005)
R1523	1-208-855-81	s	RES, CHIP 47 (1005)
R1524	1-208-911-81	s	RES, CHIP 10K (1005)
R1525	1-208-911-81	s	RES, CHIP 10K (1005)
R1526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1700	1-208-863-81	s	RES, CHIP 100 (1005)
R1701	1-208-863-81	s	RES, CHIP 100 (1005)
R1702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1800	1-208-911-81	s	RES, CHIP 10K (1005)
R1801	1-208-911-81	s	RES, CHIP 10K (1005)
R1802	1-208-911-81	s	RES, CHIP 10K (1005)
R1803	1-208-911-81	s	RES, CHIP 10K (1005)
R1804	1-208-911-81	s	RES, CHIP 10K (1005)
R1805	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1806	1-208-911-81	s	RES, CHIP 10K (1005)
R1807	1-208-911-81	s	RES, CHIP 10K (1005)
R1808	1-208-911-81	s	RES, CHIP 10K (1005)
R1809	1-208-911-81	s	RES, CHIP 10K (1005)
R1810	1-208-911-81	s	RES, CHIP 10K (1005)
R1811	1-208-911-81	s	RES, CHIP 10K (1005)
R1830	1-208-911-81	s	RES, CHIP 10K (1005)
R1831	1-208-911-81	s	RES, CHIP 10K (1005)
R1832	1-208-911-81	s	RES, CHIP 10K (1005)
R1833	1-208-911-81	s	RES, CHIP 10K (1005)
R1840	1-208-863-81	s	RES, CHIP 100 (1005)
R1841	1-208-911-81	s	RES, CHIP 10K (1005)
R1842	1-208-911-81	s	RES, CHIP 10K (1005)
R1843	1-208-911-81	s	RES, CHIP 10K (1005)
R1844	1-208-911-81	s	RES, CHIP 10K (1005)
R1847	1-220-878-81	s	RES, CHIP 22 (1005)
R1848	1-220-878-81	s	RES, CHIP 22 (1005)
R1849	1-220-878-81	s	RES, CHIP 22 (1005)
R1850	1-220-878-81	s	RES, CHIP 22 (1005)
R1851	1-220-878-81	s	RES, CHIP 22 (1005)
R1852	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1853	1-208-935-81	s	RES, CHIP 100K (1005)
R1854	1-208-935-81	s	RES, CHIP 100K (1005)
R1856	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1859	1-220-878-81	s	RES, CHIP 22 (1005)
R1860	1-220-878-81	s	RES, CHIP 22 (1005)
R1861	1-220-878-81	s	RES, CHIP 22 (1005)
R1862	1-220-878-81	s	RES, CHIP 22 (1005)
R1863	1-220-878-81	s	RES, CHIP 22 (1005)
R2000	1-208-855-81	s	RES, CHIP 47 (1005)
R2001	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2002	1-208-855-81	s	RES, CHIP 47 (1005)
R2003	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2004	1-208-871-81	s	RES, CHIP 220 (1005)
R2005	1-208-911-81	s	RES, CHIP 10K (1005)
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2007	1-208-871-81	s	RES, CHIP 220 (1005)
R2008	1-208-911-81	s	RES, CHIP 10K (1005)
R2009	1-220-878-81	s	RES, CHIP 22 (1005)
R2010	1-208-911-81	s	RES, CHIP 10K (1005)
R2011	1-220-878-81	s	RES, CHIP 22 (1005)
R2012	1-208-911-81	s	RES, CHIP 10K (1005)
R2013	1-220-878-81	s	RES, CHIP 22 (1005)
R2014	1-208-871-81	s	RES, CHIP 220 (1005)
R2015	1-208-911-81	s	RES, CHIP 10K (1005)
R2016	1-220-878-81	s	RES, CHIP 22 (1005)
R2017	1-208-871-81	s	RES, CHIP 220 (1005)
R2018	1-208-911-81	s	RES, CHIP 10K (1005)
R2019	1-220-878-81	s	RES, CHIP 22 (1005)
R2020	1-208-871-81	s	RES, CHIP 220 (1005)
R2021	1-208-911-81	s	RES, CHIP 10K (1005)
R2022	1-220-878-81	s	RES, CHIP 22 (1005)
R2023	1-208-911-81	s	RES, CHIP 10K (1005)
R2024	1-220-878-81	s	RES, CHIP 22 (1005)
R2025	1-208-911-81	s	RES, CHIP 10K (1005)
R2026	1-220-878-81	s	RES, CHIP 22 (1005)
R2027	1-208-911-81	s	RES, CHIP 10K (1005)
R2028	1-220-878-81	s	RES, CHIP 22 (1005)
R2029	1-208-871-81	s	RES, CHIP 220 (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2030	1-208-911-81	s	RES, CHIP 10K (1005)
R2031	1-220-878-81	s	RES, CHIP 22 (1005)
R2032	1-208-871-81	s	RES, CHIP 220 (1005)
R2033	1-208-911-81	s	RES, CHIP 10K (1005)
R2034	1-220-878-81	s	RES, CHIP 22 (1005)
R2035	1-208-871-81	s	RES, CHIP 220 (1005)
R2036	1-208-911-81	s	RES, CHIP 10K (1005)
R2037	1-220-878-81	s	RES, CHIP 22 (1005)
R2038	1-208-911-81	s	RES, CHIP 10K (1005)
R2039	1-220-878-81	s	RES, CHIP 22 (1005)
R2040	1-208-911-81	s	RES, CHIP 10K (1005)
R2041	1-220-878-81	s	RES, CHIP 22 (1005)
R2042	1-208-911-81	s	RES, CHIP 10K (1005)
R2043	1-220-878-81	s	RES, CHIP 22 (1005)
R2044	1-208-855-81	s	RES, CHIP 47 (1005)
R2045	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2046	1-208-855-81	s	RES, CHIP 47 (1005)
R2047	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2048	1-208-871-81	s	RES, CHIP 220 (1005)
R2049	1-208-911-81	s	RES, CHIP 10K (1005)
R2050	1-220-878-81	s	RES, CHIP 22 (1005)
R2051	1-208-871-81	s	RES, CHIP 220 (1005)
R2052	1-208-911-81	s	RES, CHIP 10K (1005)
R2053	1-220-878-81	s	RES, CHIP 22 (1005)
R2054	1-208-911-81	s	RES, CHIP 10K (1005)
R2055	1-220-878-81	s	RES, CHIP 22 (1005)
R2056	1-208-911-81	s	RES, CHIP 10K (1005)
R2057	1-220-878-81	s	RES, CHIP 22 (1005)
R2058	1-220-878-81	s	RES, CHIP 22 (1005)
R2059	1-220-878-81	s	RES, CHIP 22 (1005)
R2060	1-220-878-81	s	RES, CHIP 22 (1005)
R2061	1-220-878-81	s	RES, CHIP 22 (1005)
R2062	1-220-878-81	s	RES, CHIP 22 (1005)
R2063	1-220-878-81	s	RES, CHIP 22 (1005)
R2064	1-220-878-81	s	RES, CHIP 22 (1005)
R2065	1-220-878-81	s	RES, CHIP 22 (1005)
R2066	1-220-878-81	s	RES, CHIP 22 (1005)
R2067	1-220-878-81	s	RES, CHIP 22 (1005)
R2068	1-220-878-81	s	RES, CHIP 22 (1005)
R2069	1-220-878-81	s	RES, CHIP 22 (1005)
R2070	1-220-878-81	s	RES, CHIP 22 (1005)
R2071	1-220-878-81	s	RES, CHIP 22 (1005)
R2072	1-220-878-81	s	RES, CHIP 22 (1005)
R2073	1-220-878-81	s	RES, CHIP 22 (1005)
R2074	1-220-878-81	s	RES, CHIP 22 (1005)
R2075	1-220-878-81	s	RES, CHIP 22 (1005)
R2076	1-220-878-81	s	RES, CHIP 22 (1005)
R2077	1-220-878-81	s	RES, CHIP 22 (1005)
R2078	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2079	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2080	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2081	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2200	1-208-855-81	s	RES, CHIP 47 (1005)
R2201	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2204	1-208-871-81	s	RES, CHIP 220 (1005)
R2205	1-208-911-81	s	RES, CHIP 10K (1005)
R2206	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2207	1-208-871-81	s	RES, CHIP 220 (1005)
R2208	1-208-911-81	s	RES, CHIP 10K (1005)
R2209	1-220-878-81	s	RES, CHIP 22 (1005)
R2210	1-208-911-81	s	RES, CHIP 10K (1005)
R2211	1-220-878-81	s	RES, CHIP 22 (1005)
R2212	1-208-911-81	s	RES, CHIP 10K (1005)
R2213	1-220-878-81	s	RES, CHIP 22 (1005)
R2214	1-208-871-81	s	RES, CHIP 220 (1005)
R2215	1-208-911-81	s	RES, CHIP 10K (1005)
R2216	1-220-878-81	s	RES, CHIP 22 (1005)
R2217	1-208-871-81	s	RES, CHIP 220 (1005)
R2218	1-208-911-81	s	RES, CHIP 10K (1005)
R2219	1-220-878-81	s	RES, CHIP 22 (1005)
R2220	1-208-871-81	s	RES, CHIP 220 (1005)
R2221	1-208-911-81	s	RES, CHIP 10K (1005)
R2222	1-220-878-81	s	RES, CHIP 22 (1005)
R2223	1-208-911-81	s	RES, CHIP 10K (1005)
R2224	1-220-878-81	s	RES, CHIP 22 (1005)
R2225	1-208-911-81	s	RES, CHIP 10K (1005)
R2226	1-220-878-81	s	RES, CHIP 22 (1005)
R2227	1-208-911-81	s	RES, CHIP 10K (1005)
R2228	1-220-878-81	s	RES, CHIP 22 (1005)
R2229	1-208-871-81	s	RES, CHIP 220 (1005)
R2230	1-208-911-81	s	RES, CHIP 10K (1005)
R2231	1-220-878-81	s	RES, CHIP 22 (1005)
R2232	1-208-871-81	s	RES, CHIP 220 (1005)
R2233	1-208-911-81	s	RES, CHIP 10K (1005)
R2234	1-220-878-81	s	RES, CHIP 22 (1005)
R2235	1-208-871-81	s	RES, CHIP 220 (1005)
R2236	1-208-911-81	s	RES, CHIP 10K (1005)
R2237	1-220-878-81	s	RES, CHIP 22 (1005)
R2238	1-208-911-81	s	RES, CHIP 10K (1005)
R2239	1-220-878-81	s	RES, CHIP 22 (1005)
R2240	1-208-911-81	s	RES, CHIP 10K (1005)
R2241	1-220-878-81	s	RES, CHIP 22 (1005)
R2242	1-208-911-81	s	RES, CHIP 10K (1005)
R2243	1-220-878-81	s	RES, CHIP 22 (1005)
R2244	1-208-855-81	s	RES, CHIP 47 (1005)
R2245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2246	1-208-855-81	s	RES, CHIP 47 (1005)
R2247	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2248	1-208-871-81	s	RES, CHIP 220 (1005)
R2249	1-208-911-81	s	RES, CHIP 10K (1005)
R2250	1-220-878-81	s	RES, CHIP 22 (1005)
R2251	1-208-871-81	s	RES, CHIP 220 (1005)
R2252	1-208-911-81	s	RES, CHIP 10K (1005)
R2253	1-220-878-81	s	RES, CHIP 22 (1005)
R2254	1-208-911-81	s	RES, CHIP 10K (1005)
R2255	1-220-878-81	s	RES, CHIP 22 (1005)
R2256	1-208-911-81	s	RES, CHIP 10K (1005)
R2257	1-220-878-81	s	RES, CHIP 22 (1005)
R2258	1-220-878-81	s	RES, CHIP 22 (1005)
R2259	1-220-878-81	s	RES, CHIP 22 (1005)
R2260	1-220-878-81	s	RES, CHIP 22 (1005)
R2261	1-220-878-81	s	RES, CHIP 22 (1005)
R2262	1-220-878-81	s	RES, CHIP 22 (1005)
R2263	1-220-878-81	s	RES, CHIP 22 (1005)
R2264	1-220-878-81	s	RES, CHIP 22 (1005)
R2265	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2266	1-220-878-81	s	RES, CHIP 22 (1005)
R2267	1-220-878-81	s	RES, CHIP 22 (1005)
R2268	1-220-878-81	s	RES, CHIP 22 (1005)
R2269	1-220-878-81	s	RES, CHIP 22 (1005)
R2270	1-220-878-81	s	RES, CHIP 22 (1005)
R2271	1-220-878-81	s	RES, CHIP 22 (1005)
R2272	1-220-878-81	s	RES, CHIP 22 (1005)
R2273	1-220-878-81	s	RES, CHIP 22 (1005)
R2274	1-220-878-81	s	RES, CHIP 22 (1005)
R2275	1-220-878-81	s	RES, CHIP 22 (1005)
R2276	1-220-878-81	s	RES, CHIP 22 (1005)
R2277	1-220-878-81	s	RES, CHIP 22 (1005)
R2278	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2279	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2280	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2281	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2500	1-208-855-81	s	RES, CHIP 47 (1005)
R2501	1-208-855-81	s	RES, CHIP 47 (1005)
R2502	1-208-855-81	s	RES, CHIP 47 (1005)
R2503	1-208-855-81	s	RES, CHIP 47 (1005)
R2504	1-208-855-81	s	RES, CHIP 47 (1005)
R2505	1-208-855-81	s	RES, CHIP 47 (1005)
R2506	1-208-855-81	s	RES, CHIP 47 (1005)
R2507	1-208-855-81	s	RES, CHIP 47 (1005)
R2508	1-208-855-81	s	RES, CHIP 47 (1005)
R2509	1-208-855-81	s	RES, CHIP 47 (1005)
R2510	1-208-855-81	s	RES, CHIP 47 (1005)
R2511	1-208-855-81	s	RES, CHIP 47 (1005)
R2512	1-208-855-81	s	RES, CHIP 47 (1005)
R2513	1-208-855-81	s	RES, CHIP 47 (1005)
R2514	1-208-855-81	s	RES, CHIP 47 (1005)
R2515	1-208-855-81	s	RES, CHIP 47 (1005)
R2516	1-208-855-81	s	RES, CHIP 47 (1005)
R2517	1-208-855-81	s	RES, CHIP 47 (1005)
R2518	1-208-855-81	s	RES, CHIP 47 (1005)
R2519	1-208-855-81	s	RES, CHIP 47 (1005)
R2520	1-208-855-81	s	RES, CHIP 47 (1005)
R2521	1-208-855-81	s	RES, CHIP 47 (1005)
R2522	1-208-855-81	s	RES, CHIP 47 (1005)
R2523	1-208-855-81	s	RES, CHIP 47 (1005)
R2524	1-208-911-81	s	RES, CHIP 10K (1005)
R2525	1-208-911-81	s	RES, CHIP 10K (1005)
R2526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2800	1-208-911-81	s	RES, CHIP 10K (1005)
R2801	1-208-911-81	s	RES, CHIP 10K (1005)
R2802	1-208-911-81	s	RES, CHIP 10K (1005)
R2803	1-208-911-81	s	RES, CHIP 10K (1005)
R2804	1-208-911-81	s	RES, CHIP 10K (1005)
R2805	1-208-911-81	s	RES, CHIP 10K (1005)
R2806	1-208-911-81	s	RES, CHIP 10K (1005)
R2807	1-208-911-81	s	RES, CHIP 10K (1005)
R2808	1-208-911-81	s	RES, CHIP 10K (1005)
R2809	1-208-911-81	s	RES, CHIP 10K (1005)
R2810	1-208-911-81	s	RES, CHIP 10K (1005)
R2811	1-208-911-81	s	RES, CHIP 10K (1005)
R2853	1-208-935-81	s	RES, CHIP 100K (1005)
R2854	1-208-935-81	s	RES, CHIP 100K (1005)
R2856	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3001	1-220-878-81	s	RES, CHIP 22 (1005)
R3100	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3102	1-220-878-81	s	RES, CHIP 22 (1005)
R3103	1-220-878-81	s	RES, CHIP 22 (1005)
R3104	1-220-878-81	s	RES, CHIP 22 (1005)
R3105	1-220-878-81	s	RES, CHIP 22 (1005)
R3106	1-220-878-81	s	RES, CHIP 22 (1005)
R3107	1-220-878-81	s	RES, CHIP 22 (1005)
R3108	1-220-878-81	s	RES, CHIP 22 (1005)
R3109	1-220-878-81	s	RES, CHIP 22 (1005)
R3110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3111	1-220-878-81	s	RES, CHIP 22 (1005)
R3112	1-220-878-81	s	RES, CHIP 22 (1005)
R3113	1-220-878-81	s	RES, CHIP 22 (1005)
R3114	1-220-878-81	s	RES, CHIP 22 (1005)
R3115	1-220-878-81	s	RES, CHIP 22 (1005)
R3116	1-220-878-81	s	RES, CHIP 22 (1005)
R3117	1-220-878-81	s	RES, CHIP 22 (1005)
R3118	1-220-878-81	s	RES, CHIP 22 (1005)
R3119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3121	1-208-911-81	s	RES, CHIP 10K (1005)
R3122	1-208-911-81	s	RES, CHIP 10K (1005)
R3123	1-208-911-81	s	RES, CHIP 10K (1005)
R3125	1-208-911-81	s	RES, CHIP 10K (1005)
R3128	1-208-911-81	s	RES, CHIP 10K (1005)
R3130	1-208-911-81	s	RES, CHIP 10K (1005)
R3132	1-208-911-81	s	RES, CHIP 10K (1005)
R3134	1-208-911-81	s	RES, CHIP 10K (1005)
R3200	1-208-911-81	s	RES, CHIP 10K (1005)
R3201	1-208-911-81	s	RES, CHIP 10K (1005)
R3203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3204	1-220-878-81	s	RES, CHIP 22 (1005)
R3205	1-220-878-81	s	RES, CHIP 22 (1005)
R3206	1-220-878-81	s	RES, CHIP 22 (1005)
R3207	1-220-878-81	s	RES, CHIP 22 (1005)
R3208	1-220-878-81	s	RES, CHIP 22 (1005)
R3209	1-220-878-81	s	RES, CHIP 22 (1005)
R3210	1-220-878-81	s	RES, CHIP 22 (1005)
R3211	1-220-878-81	s	RES, CHIP 22 (1005)
R3212	1-220-878-81	s	RES, CHIP 22 (1005)
R3213	1-220-878-81	s	RES, CHIP 22 (1005)
R3214	1-220-878-81	s	RES, CHIP 22 (1005)
R3215	1-220-878-81	s	RES, CHIP 22 (1005)
R3216	1-220-878-81	s	RES, CHIP 22 (1005)
R3217	1-220-878-81	s	RES, CHIP 22 (1005)
R3218	1-220-878-81	s	RES, CHIP 22 (1005)
R3219	1-208-911-81	s	RES, CHIP 10K (1005)
R3220	1-208-911-81	s	RES, CHIP 10K (1005)
R3221	1-208-911-81	s	RES, CHIP 10K (1005)
R3222	1-208-911-81	s	RES, CHIP 10K (1005)
R3223	1-208-911-81	s	RES, CHIP 10K (1005)
R3224	1-208-911-81	s	RES, CHIP 10K (1005)
R3225	1-208-911-81	s	RES, CHIP 10K (1005)
R3226	1-208-911-81	s	RES, CHIP 10K (1005)
R3227	1-208-911-81	s	RES, CHIP 10K (1005)
R3228	1-208-911-81	s	RES, CHIP 10K (1005)
R3229	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3230	1-208-911-81	s	RES, CHIP 10K (1005)
R3231	1-208-911-81	s	RES, CHIP 10K (1005)
R3232	1-208-911-81	s	RES, CHIP 10K (1005)
R3233	1-208-911-81	s	RES, CHIP 10K (1005)
R3234	1-208-911-81	s	RES, CHIP 10K (1005)
R3235	1-208-911-81	s	RES, CHIP 10K (1005)
R3236	1-208-911-81	s	RES, CHIP 10K (1005)
R3237	1-208-911-81	s	RES, CHIP 10K (1005)
R3500	1-220-878-81	s	RES, CHIP 22 (1005)
R3501	1-220-878-81	s	RES, CHIP 22 (1005)
R3502	1-220-878-81	s	RES, CHIP 22 (1005)
R3503	1-220-878-81	s	RES, CHIP 22 (1005)
R3504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3512	1-208-863-81	s	RES, CHIP 100 (1005)
R3513	1-208-927-81	s	RES, CHIP 47K (1005)
R3514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3516	1-208-879-81	s	RES, CHIP 470 (1005)
R3517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3520	1-220-878-81	s	RES, CHIP 22 (1005)
R3521	1-220-878-81	s	RES, CHIP 22 (1005)
R3522	1-220-878-81	s	RES, CHIP 22 (1005)
R3523	1-220-878-81	s	RES, CHIP 22 (1005)
R3524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3526	1-218-825-91	s	RES, CHIP 120 (1608)
R3527	1-218-825-91	s	RES, CHIP 120 (1608)
R3528	1-208-895-81	s	RES, CHIP 2.2K (1005)
R3530	1-208-911-81	s	RES, CHIP 10K (1005)
R3532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3533	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3534	1-220-878-81	s	RES, CHIP 22 (1005)
R3535	1-220-878-81	s	RES, CHIP 22 (1005)
R3536	1-220-878-81	s	RES, CHIP 22 (1005)
R3602	1-208-911-81	s	RES, CHIP 10K (1005)
R3604	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3616	1-208-911-81	s	RES, CHIP 10K (1005)
R3617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3618	1-208-871-81	s	RES, CHIP 220 (1005)
R3619	1-208-871-81	s	RES, CHIP 220 (1005)
R3620	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3621	1-208-871-81	s	RES, CHIP 220 (1005)
R3622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3623	1-218-947-81	s	RES, CHIP 330
R3624	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3628	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3700	1-208-911-81	s	RES, CHIP 10K (1005)
R3701	1-208-911-81	s	RES, CHIP 10K (1005)
R3702	1-208-911-81	s	RES, CHIP 10K (1005)
R3703	1-218-947-81	s	RES, CHIP 330
R3704	1-208-911-81	s	RES, CHIP 10K (1005)
R3705	1-218-947-81	s	RES, CHIP 330
R3706	1-208-911-81	s	RES, CHIP 10K (1005)
R3707	1-218-947-81	s	RES, CHIP 330
R3708	1-208-911-81	s	RES, CHIP 10K (1005)
R3709	1-218-947-81	s	RES, CHIP 330
R3710	1-208-911-81	s	RES, CHIP 10K (1005)
R3711	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3712	1-220-878-81	s	RES, CHIP 22 (1005)
R3713	1-220-878-81	s	RES, CHIP 22 (1005)
R3714	1-208-911-81	s	RES, CHIP 10K (1005)
R3715	1-208-911-81	s	RES, CHIP 10K (1005)
R3716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3717	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3718	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3800	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3809	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3811	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3812	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3813	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3814	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3820	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3824	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3829	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3831	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3834	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3836	1-216-809-91	s	RES, CHIP 100 (1608)
R3837	1-216-809-91	s	RES, CHIP 100 (1608)
R3838	1-216-809-91	s	RES, CHIP 100 (1608)
R3839	1-216-809-91	s	RES, CHIP 100 (1608)
R3900	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3901	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3903	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3904	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3905	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3906	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3908	1-220-878-81	s	RES, CHIP 22 (1005)
R3909	1-220-878-81	s	RES, CHIP 22 (1005)
R3910	1-220-878-81	s	RES, CHIP 22 (1005)
R3912	1-220-878-81	s	RES, CHIP 22 (1005)
R4000	1-208-855-81	s	RES, CHIP 47 (1005)
R4001	1-208-855-81	s	RES, CHIP 47 (1005)
R4002	1-208-855-81	s	RES, CHIP 47 (1005)
R4003	1-208-855-81	s	RES, CHIP 47 (1005)
R4004	1-208-855-81	s	RES, CHIP 47 (1005)
R4005	1-208-855-81	s	RES, CHIP 47 (1005)
R4006	1-208-855-81	s	RES, CHIP 47 (1005)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4007	1-208-855-81	s	RES, CHIP 47 (1005)
R4008	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4009	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4010	1-208-860-81	s	RES, CHIP 75 (1005)
R4011	1-208-860-81	s	RES, CHIP 75 (1005)
R4012	1-208-860-81	s	RES, CHIP 75 (1005)
R4013	1-208-860-81	s	RES, CHIP 75 (1005)
R4014	1-208-855-81	s	RES, CHIP 47 (1005)
R4015	1-208-855-81	s	RES, CHIP 47 (1005)
R4016	1-208-855-81	s	RES, CHIP 47 (1005)
R4017	1-208-855-81	s	RES, CHIP 47 (1005)
R4018	1-208-855-81	s	RES, CHIP 47 (1005)
R4019	1-208-855-81	s	RES, CHIP 47 (1005)
R4020	1-208-855-81	s	RES, CHIP 47 (1005)
R4021	1-208-855-81	s	RES, CHIP 47 (1005)
R4022	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4023	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4024	1-208-895-81	s	RES, CHIP 2.2K (1005)
R5001	1-208-911-81	s	RES, CHIP 10K (1005)
R5002	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5003	1-208-863-81	s	RES, CHIP 100 (1005)
R5004	1-208-911-81	s	RES, CHIP 10K (1005)
R5005	1-208-911-81	s	RES, CHIP 10K (1005)
R5006	1-208-911-81	s	RES, CHIP 10K (1005)
R5007	1-208-935-81	s	RES, CHIP 100K (1005)
R5008	1-208-892-81	s	RES, CHIP 1.6K (1005)
R5009	1-208-911-81	s	RES, CHIP 10K (1005)
R5010	1-208-911-81	s	RES, CHIP 10K (1005)
R5013	1-208-911-81	s	RES, CHIP 10K (1005)
R5014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5016	1-220-878-81	s	RES, CHIP 22 (1005)
R5017	1-208-895-81	s	RES, CHIP 2.2K (1005)
R5018	1-208-895-81	s	RES, CHIP 2.2K (1005)
R5019	1-208-887-81	s	RES, CHIP 1.0K (1005)
RB1000	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1008	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1018	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1019	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1020	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1021	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1022	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1023	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1024	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1025	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1026	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1027	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1028	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1029	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1030	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1031	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1032	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1033	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1034	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1035	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1036	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1037	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1038	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1039	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1040	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1041	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1042	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1043	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1044	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1045	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1046	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1047	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1048	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1049	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1050	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1051	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1052	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1053	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1054	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1055	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1056	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1057	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1058	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1059	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1213	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1222	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1223	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1224	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1225	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1228	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1229	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1230	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1231	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1232	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1233	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1234	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1235	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1236	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1237	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1238	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1239	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1240	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1241	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1242	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1243	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1244	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1245	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1246	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1247	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1248	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1249	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1250	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1251	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1252	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1253	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1254	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1255	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1256	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1257	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1258	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1259	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2000	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2008	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2018	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2019	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2020	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2021	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2022	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2023	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2024	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2025	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2026	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2027	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2028	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2029	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2030	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2031	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2032	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2033	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2034	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2035	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2036	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2037	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2038	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2039	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2040	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2041	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2042	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2043	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2044	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2045	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2046	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2047	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2048	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2049	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2050	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2051	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2052	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2053	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2054	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2055	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2056	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2057	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2058	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2059	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2213	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2220	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2223	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2224	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2225	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2228	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2229	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2230	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2231	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2232	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2233	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2234	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2235	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2236	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2237	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2238	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2239	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2240	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2241	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2242	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2243	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2244	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2245	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2246	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2247	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2248	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2249	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2250	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2251	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2252	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2253	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2254	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2255	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2256	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2257	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2258	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2259	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3000	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3001	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3002	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3003	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3004	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3005	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3006	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3007	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3008	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3013	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3014	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3015	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3016	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3017	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3018	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3019	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3020	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3021	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3022	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3023	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3024	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3025	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3026	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3027	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3028	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3029	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3030	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3031	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3032	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3033	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3300	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3301	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3302	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3303	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3304	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3305	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3306	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3307	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3308	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3309	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3310	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3311	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3312	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3313	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3314	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3315	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3316	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3317	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3318	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3319	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3320	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3321	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3322	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3323	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3400	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3403	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3405	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3406	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3407	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3408	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3409	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3410	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3411	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3412	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3413	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3414	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3415	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3416	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3417	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3418	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3419	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3420	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3421	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3422	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3423	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3600	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3602	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3603	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3604	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3605	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3700	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3702	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3703	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3704	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3705	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3706	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3707	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3900	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S3001	1-771-721-21	s	SWITCH, TACTILE
S3100	1-771-721-21	s	SWITCH, TACTILE
T4001	1-443-851-21	s	GIGABIT MAGNETIC MODULE
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP450	1-535-877-22	s	CHIP, CHECKER
TP3100	1-535-877-22	s	CHIP, CHECKER
TP3500	1-535-877-22	s	CHIP, CHECKER
X3500	1-813-488-11	s	OSCILLATOR, CRYSTAL
X3501	1-813-824-11	s	OSCILLATOR, CRYSTAL
X5000	1-813-264-11	s	OSCILLATOR, CRYSTAL

OUT-35 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1775-430-A	s	MOUNTED CIRCUIT BOARD, OUT-35
14pcs	4-143-557-01	s	SPRING, COMPRESSION
14pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
8pcs	4-187-619-01	s	SHEET,RADIATION(25X25X2)
2pcs	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
1pc	7-626-320-61	s	PIN, SPRING 3X18
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C228	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C229	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C230	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C231	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C232	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C233	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C234	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C235	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C236	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C237	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C238	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C239	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C240	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C243	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C244	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C245	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C246	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C247	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C248	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C249	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C250	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C251	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C252	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C253	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C254	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C255	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C256	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C257	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C258	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C259	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C260	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C261	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C262	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C263	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C264	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C265	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C301	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C302	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C303	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C304	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C419	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C420	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C423	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C424	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C427	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C428	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C431	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C432	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C435	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C436	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C439	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C440	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C443	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C444	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C447	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C448	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C451	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C452	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C453	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C454	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1119	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1121	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1604	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1605	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1607	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1608	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1609	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1610	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1611	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1612	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1613	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1614	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1615	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1616	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1617	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1618	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1619	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1620	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1621	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1622	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1623	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1624	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1625	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1626	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1627	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1628	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1629	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1630	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1631	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1632	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1633	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1634	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1635	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1636	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1701	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1702	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1703	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1704	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1705	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1706	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1707	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1708	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1711	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1713	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1714	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1715	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1716	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1717	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1718	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1719	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1720	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1721	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1722	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1723	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1724	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1725	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1726	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1727	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1729	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1730	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1732	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1801	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1802	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1803	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1804	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1805	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1806	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1807	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1808	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1810	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1811	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1813	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1815	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1816	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1817	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1818	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1819	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1820	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1901	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1902	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1903	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1904	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1905	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1906	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1907	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1908	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1909	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1910	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1911	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1912	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1913	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1914	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1915	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1916	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1917	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1918	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1919	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1920	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1921	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1922	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1923	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1924	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1925	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1926	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1927	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1928	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1929	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1930	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1931	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1932	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1933	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1934	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1935	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1936	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1937	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1938	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1939	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1940	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1941	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1942	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1943	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1944	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1945	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1946	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1947	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1948	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1949	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1950	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1951	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1952	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2201	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2202	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2203	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2307	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2322	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2328	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2329	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2333	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2338	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2341	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2343	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2348	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2355	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2358	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2362	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2369	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2371	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2373	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2378	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2381	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2383	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2507	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2509	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2513	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2516	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2529	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2533	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2538	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2541	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2543	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2548	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2558	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2562	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2569	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2570	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2571	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2572	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2573	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2574	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2575	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2577	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2578	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2579	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2580	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2581	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2582	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2583	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2607	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2608	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2609	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2610	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2611	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2612	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2613	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2614	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2616	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2618	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2619	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2620	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2621	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2622	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2623	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2624	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2625	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2626	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2627	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2628	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2629	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2630	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2631	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2632	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2633	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2634	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2635	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2637	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2639	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2641	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2643	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2646	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2648	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2649	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2650	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2654	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2655	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2656	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2658	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2659	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2660	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2661	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2662	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2663	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2664	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2666	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2667	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2668	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2669	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2670	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2671	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2672	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2673	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2674	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2676	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2677	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2679	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2680	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2681	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2682	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2683	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2685	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2686	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2819	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2902	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2903	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2904	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2926	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2953	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2961	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2962	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2963	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2968	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2969	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2970	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2972	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2974	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2975	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2976	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2977	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2978	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2979	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2981	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2982	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2983	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2986	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2987	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2991	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2992	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2994	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2995	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2996	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2997	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2999	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3103	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3231	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3232	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3233	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3234	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3238	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3244	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3253	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3255	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3256	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3257	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3259	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3262	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3263	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3264	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3265	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3266	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3267	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3268	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3271	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3273	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3274	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3276	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3277	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3280	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3282	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3283	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3284	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3285	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3286	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3287	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3288	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3289	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3301	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3302	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3304	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3305	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3306	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3307	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3308	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3309	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3310	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3311	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3312	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3313	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3319	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3327	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3330	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3337	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3340	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3341	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3343	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3349	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3351	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3354	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3359	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3363	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3364	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3365	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3366	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3367	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3371	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3372	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3373	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3374	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3376	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3377	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3379	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3380	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3381	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3382	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3383	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3384	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3385	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3386	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3387	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3388	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3389	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3390	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3391	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3392	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3393	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3394	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3395	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3396	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3397	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3398	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3399	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3631	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3632	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3633	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3634	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3635	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3638	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3640	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3641	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3643	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3644	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3646	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3647	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3649	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3650	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3653	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3655	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3656	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3658	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3659	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3660	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3661	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3662	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3664	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3666	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3667	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3668	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3669	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3670	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3671	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3672	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3673	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3674	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3676	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3677	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3679	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3680	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3681	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3682	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3683	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3685	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3686	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3687	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3688	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3689	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3701	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3702	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3703	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3704	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3705	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3706	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3707	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3708	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3709	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3710	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3711	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3712	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3713	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3719	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C3720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3721	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3724	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3727	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3730	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3734	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3737	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3740	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3742	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3743	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3746	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3747	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3749	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3754	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3759	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3761	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3763	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3764	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3765	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3766	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3767	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3768	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3770	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3771	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3773	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3774	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3776	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3777	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3779	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3780	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3781	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3782	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3783	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3784	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3785	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3786	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3787	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3788	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3789	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3790	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3791	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3792	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3793	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3794	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3795	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3796	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3797	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3798	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3799	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C3801	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3802	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3804	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3806	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3814	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3816	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3817	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3818	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3820	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3840	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3862	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3868	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3869	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3870	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3871	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3872	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3873	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3874	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3877	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3881	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3882	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3883	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3902	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3903	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3904	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3910	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3911	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3912	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3913	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3914	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3915	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3916	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3917	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3918	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3919	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3920	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3921	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3922	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3923	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3924	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3925	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3926	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3927	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3928	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3929	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3930	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3931	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3932	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3933	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3934	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3935	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3940	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3942	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3953	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3958	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3965	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3968	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3969	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3970	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3972	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3973	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3974	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3975	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3977	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3979	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3981	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3983	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3987	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3989	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4002	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4003	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4004	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4007	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4008	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4009	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4010	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4011	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4012	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4013	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4014	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4015	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4016	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4017	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4018	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4019	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4020	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4021	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4022	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4023	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4024	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4025	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4026	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4027	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4028	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4029	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4030	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4053	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4054	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4057	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4060	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4062	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4065	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4067	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4073	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4077	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4079	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4081	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4083	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4085	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4101	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4102	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4105	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4106	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4110	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4111	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4112	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4113	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4114	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4115	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4116	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4117	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4118	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4119	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4120	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4121	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4122	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4123	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4124	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4125	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4126	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4127	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4128	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4129	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4130	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4131	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4132	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4133	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4134	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4135	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4140	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4142	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4148	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4150	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4156	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4158	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4165	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4168	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4170	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4172	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4173	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4177	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4204	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4207	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4208	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4209	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4210	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4211	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4212	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4213	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4214	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4215	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4216	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4217	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4218	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4219	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4220	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4221	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4222	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4223	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4224	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4225	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4226	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4227	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4228	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4229	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4230	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4257	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4260	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4267	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4268	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4271	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4276	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4280	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4307	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4308	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4309	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4310	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4311	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4312	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4313	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4314	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4315	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4316	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4317	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4318	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4319	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4320	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4321	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4322	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4323	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4324	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4325	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4326	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4327	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4328	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4329	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4330	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4353	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4360	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4367	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4371	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4385	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4404	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4410	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4412	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4413	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4416	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4417	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4418	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4419	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4420	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4421	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4422	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4423	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4424	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4425	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4426	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4427	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4428	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4429	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4430	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4431	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4432	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4433	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4434	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4435	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4443	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4458	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4462	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4465	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4466	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4468	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4470	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4472	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4474	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4476	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4480	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4482	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4484	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4485	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4486	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4487	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4488	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4489	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4490	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4503	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4504	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4507	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4508	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4509	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4510	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4511	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4512	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4513	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4514	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4515	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4516	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4517	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4518	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4519	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4520	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4521	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4522	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4523	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4524	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4525	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4526	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4527	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4528	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4529	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4530	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4532	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4541	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4543	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4544	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4546	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4552	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4553	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4560	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4562	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4567	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4569	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4570	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4572	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4573	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4574	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4577	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4578	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4579	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4580	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4581	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4582	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4583	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4584	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4585	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1501	1-770-627-21	s	PIN, CONNECTOR 10P
CN1502	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1503	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3101	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN3501	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
D201	8-719-069-28	s	DI 1SS400FJTE61

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-598-01	s	DI SML-D12U8WT86
D402	6-502-598-01	s	DI SML-D12U8WT86
D1101	6-502-352-01	s	DI SML-522MU8WT86PQ
D1102	6-502-352-01	s	DI SML-522MU8WT86PQ
D1103	6-502-598-01	s	DI SML-D12U8WT86
D1104	6-501-436-01	s	DIODE SML412BC6TT86
D1201	6-502-598-01	s	DI SML-D12U8WT86
D1202	6-502-598-01	s	DI SML-D12U8WT86
D2601	8-719-069-28	s	DI 1SS400FJTE61
D2602	8-719-069-28	s	DI 1SS400FJTE61
D2701	6-502-197-01	s	DI SML-D12M8WT86SM
D2702	6-502-197-01	s	DI SML-D12M8WT86SM
D2703	6-502-197-01	s	DI SML-D12M8WT86SM
D2704	6-502-197-01	s	DI SML-D12M8WT86SM
D2705	6-502-197-01	s	DI SML-D12M8WT86SM
D2706	6-502-197-01	s	DI SML-D12M8WT86SM
D2707	6-502-197-01	s	DI SML-D12M8WT86SM
D2708	6-502-197-01	s	DI SML-D12M8WT86SM
D2709	6-502-197-01	s	DI SML-D12M8WT86SM
D2710	6-502-197-01	s	DI SML-D12M8WT86SM
D2711	6-502-197-01	s	DI SML-D12M8WT86SM
D2712	6-502-197-01	s	DI SML-D12M8WT86SM
D2713	6-502-197-01	s	DI SML-D12M8WT86SM
D2714	6-502-197-01	s	DI SML-D12M8WT86SM
D2715	6-502-197-01	s	DI SML-D12M8WT86SM
D2716	6-502-197-01	s	DI SML-D12M8WT86SM
D2717	6-502-197-01	s	DI SML-D12M8WT86SM
D2718	6-502-197-01	s	DI SML-D12M8WT86SM
D2719	6-502-197-01	s	DI SML-D12M8WT86SM
D2720	6-502-197-01	s	DI SML-D12M8WT86SM
D3101	6-502-197-01	s	DI SML-D12M8WT86SM
D3102	6-502-197-01	s	DI SML-D12M8WT86SM
D3103	6-502-197-01	s	DI SML-D12M8WT86SM
D3104	6-502-197-01	s	DI SML-D12M8WT86SM
D3105	6-502-197-01	s	DI SML-D12M8WT86SM
D3106	6-502-197-01	s	DI SML-D12M8WT86SM
D3107	6-502-197-01	s	DI SML-D12M8WT86SM
D3108	6-502-197-01	s	DI SML-D12M8WT86SM
D3501	6-502-197-01	s	DI SML-D12M8WT86SM
D3502	6-502-197-01	s	DI SML-D12M8WT86SM
D3503	6-502-197-01	s	DI SML-D12M8WT86SM
D3504	6-502-197-01	s	DI SML-D12M8WT86SM
D3505	6-502-197-01	s	DI SML-D12M8WT86SM
D3506	6-502-197-01	s	DI SML-D12M8WT86SM
D3507	6-502-197-01	s	DI SML-D12M8WT86SM
D3508	6-502-197-01	s	DI SML-D12M8WT86SM
D3901	8-719-069-28	s	DI 1SS400FJTE61
D3902	8-719-069-28	s	DI 1SS400FJTE61
D3903	8-719-069-28	s	DI 1SS400FJTE61
D4001	8-719-069-28	s	DI 1SS400FJTE61

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D4002	8-719-069-28	s	DI 1SS400FJTE61
D4101	8-719-069-28	s	DI 1SS400FJTE61
D4102	8-719-069-28	s	DI 1SS400FJTE61
D4103	8-719-069-28	s	DI 1SS400FJTE61
D4201	8-719-069-28	s	DI 1SS400FJTE61
D4202	8-719-069-28	s	DI 1SS400FJTE61
D4301	8-719-069-28	s	DI 1SS400FJTE61
D4302	8-719-069-28	s	DI 1SS400FJTE61
D4401	8-719-069-28	s	DI 1SS400FJTE61
D4402	8-719-069-28	s	DI 1SS400FJTE61
D4403	8-719-069-28	s	DI 1SS400FJTE61
D4501	8-719-069-28	s	DI 1SS400FJTE61
D4502	8-719-069-28	s	DI 1SS400FJTE61
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
DD207	1-487-092-11	s	DC-DC CONVERTER
E301	1-535-877-22	s	CHIP, CHECKER
E302	1-535-877-22	s	CHIP, CHECKER
E303	1-535-877-22	s	CHIP, CHECKER
E304	1-535-877-22	s	CHIP, CHECKER
E305	1-535-877-22	s	CHIP, CHECKER
E306	1-535-877-22	s	CHIP, CHECKER
E307	1-535-877-22	s	CHIP, CHECKER
E308	1-535-877-22	s	CHIP, CHECKER
E309	1-535-877-22	s	CHIP, CHECKER
E310	1-535-877-22	s	CHIP, CHECKER
E311	1-535-877-22	s	CHIP, CHECKER
E312	1-535-877-22	s	CHIP, CHECKER
E313	1-535-877-22	s	CHIP, CHECKER
E314	1-535-877-22	s	CHIP, CHECKER
E315	1-535-877-22	s	CHIP, CHECKER
E316	1-535-877-22	s	CHIP, CHECKER
E317	1-535-877-22	s	CHIP, CHECKER
E318	1-535-877-22	s	CHIP, CHECKER
E319	1-535-877-22	s	CHIP, CHECKER
E320	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F207	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F208	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2201	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2601	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2602	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2603	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2901	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2902	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2903	1-469-379-21	s	FERRITE, EMI (SMD) (2012)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB2904	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3801	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB3802	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB3803	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB3901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC18	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC19	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC301	8-759-338-95	s	IC NJM2903V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC401	6-714-616-11	s	IC DS90LV110ATMTX
IC402	6-714-109-01	s	IC LMK03000CISQ
IC403	6-714-109-01	s	IC LMK03000CISQ
IC404	6-714-616-11	s	IC DS90LV110ATMTX
IC405	6-714-616-11	s	IC DS90LV110ATMTX
IC501	8-759-639-86	s	IC SN65LVDS32DR
IC502	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC503	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC504	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC505	6-708-324-01	s	IC R3112N301A-TR-FA
IC506	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC507	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC508	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC509	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC601	6-703-238-01	s	IC TC7WZ34FK(TE85R)
IC701	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC702	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC703	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC704	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC801	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC802	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC803	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC804	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC901	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC902	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC903	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC904	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC905	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC906	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1101	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC1102	6-710-018-01	s	IC CAT24C02WI-GT3
IC1103	6-714-192-01	s	IC ADT75BRMZ-REEL
IC1201	6-714-463-01	s	IC M29W256GL70N6E
IC1202	6-707-842-01	s	IC TC74LCX08FT(EKJ)
IC1401	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1402	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1403	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1404	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1405	6-707-850-01	s	IC TC74LCX245FT(EKJ)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1501	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1502	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1503	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1504	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC2201	6-707-035-01	s	IC LP2996MRX
IC2701	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC2702	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC2703	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC2704	8-759-523-92	s	IC TC74VHC21FT(EL)
IC2705	8-759-523-92	s	IC TC74VHC21FT(EL)
IC2706	8-759-523-92	s	IC TC74VHC21FT(EL)
IC2901	8-759-388-62	s	IC NJU7062M(TE2)
IC3101	6-703-875-01	s	IC CDCVF2505PWR
IC3102	6-705-514-01	s	IC MAX3222IPWR
IC3501	6-705-514-01	s	IC MAX3222IPWR
IC3801	6-703-238-01	s	IC TC7WZ34FK(TE85R)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L402	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L2301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2601	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2602	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2603	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2604	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2605	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2606	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2607	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2608	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2609	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2610	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2611	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2612	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2613	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2614	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2615	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2616	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2617	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3301	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3302	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3303	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3304	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3305	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3701	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3702	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3703	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3704	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3705	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
L3901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3909	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L3910	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3911	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3912	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3913	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3914	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3915	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3916	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3917	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3918	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4009	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4010	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4011	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4012	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4013	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4014	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4015	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4016	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4017	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4018	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4105	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4106	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4109	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4110	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4111	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4112	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4113	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4114	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4115	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4116	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4117	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4118	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4208	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4209	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4210	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4211	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4212	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4213	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4214	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L4215	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4216	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4217	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4218	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4309	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4310	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4311	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4312	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4313	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4314	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4315	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4316	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4317	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4318	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4405	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4406	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4407	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4408	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4409	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4410	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4411	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4412	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4413	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4414	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4415	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4416	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4417	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4418	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4505	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4506	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4507	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4508	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4509	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4510	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4511	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4512	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4513	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4514	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4515	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4516	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4517	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4518	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q312	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q313	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q314	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-218-985-11	s	RES, CHIP 470K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-927-81	s	RES, CHIP 47K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-715-11	s	RES, CHIP 22K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-935-81	s	RES, CHIP 100K (1005)
R220	1-208-935-81	s	RES, CHIP 100K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-715-11	s	RES, CHIP 22K (1005)
R225	1-208-879-81	s	RES, CHIP 470 (1005)
R226	1-208-903-81	s	RES, CHIP 4.7K (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-903-81	s	RES, CHIP 4.7K (1005)
R230	1-208-927-81	s	RES, CHIP 47K (1005)
R231	1-208-927-81	s	RES, CHIP 47K (1005)
R232	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-208-903-81	s	RES, CHIP 4.7K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R238	1-208-935-81	s	RES, CHIP 100K (1005)
R239	1-208-935-81	s	RES, CHIP 100K (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-895-81	s	RES, CHIP 2.2K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-903-81	s	RES, CHIP 4.7K (1005)
R245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R246	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-935-81	s	RES, CHIP 100K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-895-81	s	RES, CHIP 2.2K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-911-81	s	RES, CHIP 10K (1005)
R336	1-208-911-81	s	RES, CHIP 10K (1005)
R337	1-208-935-81	s	RES, CHIP 100K (1005)
R338	1-208-911-81	s	RES, CHIP 10K (1005)
R339	1-208-903-81	s	RES, CHIP 4.7K (1005)
R340	1-208-895-81	s	RES, CHIP 2.2K (1005)
R341	1-208-715-11	s	RES, CHIP 22K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-935-81	s	RES, CHIP 100K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-208-927-81	s	RES, CHIP 47K (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-825-91	s	RES, CHIP 120 (1608)
R436	1-218-825-91	s	RES, CHIP 120 (1608)
R437	1-208-895-81	s	RES, CHIP 2.2K (1005)
R438	1-208-895-81	s	RES, CHIP 2.2K (1005)
R439	1-218-825-91	s	RES, CHIP 120 (1608)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-218-825-91	s	RES, CHIP 120 (1608)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-903-81	s	RES, CHIP 4.7K (1005)
R448	1-208-903-81	s	RES, CHIP 4.7K (1005)
R501	1-220-878-81	s	RES, CHIP 22 (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-903-81	s	RES, CHIP 4.7K (1005)
R506	1-220-878-81	s	RES, CHIP 22 (1005)
R507	1-220-878-81	s	RES, CHIP 22 (1005)
R508	1-220-878-81	s	RES, CHIP 22 (1005)
R509	1-220-878-81	s	RES, CHIP 22 (1005)
R510	1-220-878-81	s	RES, CHIP 22 (1005)
R511	1-220-878-81	s	RES, CHIP 22 (1005)
R512	1-220-878-81	s	RES, CHIP 22 (1005)
R513	1-220-878-81	s	RES, CHIP 22 (1005)
R514	1-220-878-81	s	RES, CHIP 22 (1005)
R515	1-220-878-81	s	RES, CHIP 22 (1005)
R516	1-220-878-81	s	RES, CHIP 22 (1005)
R517	1-220-878-81	s	RES, CHIP 22 (1005)
R518	1-220-878-81	s	RES, CHIP 22 (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R520	1-220-878-81	s	RES, CHIP 22 (1005)
R521	1-208-887-81	s	RES, CHIP 1.0K (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-911-81	s	RES, CHIP 10K (1005)
R524	1-220-878-81	s	RES, CHIP 22 (1005)
R525	1-220-878-81	s	RES, CHIP 22 (1005)
R526	1-220-878-81	s	RES, CHIP 22 (1005)
R527	1-220-878-81	s	RES, CHIP 22 (1005)
R528	1-220-878-81	s	RES, CHIP 22 (1005)
R529	1-220-878-81	s	RES, CHIP 22 (1005)
R530	1-220-878-81	s	RES, CHIP 22 (1005)
R531	1-220-878-81	s	RES, CHIP 22 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-220-878-81	s	RES, CHIP 22 (1005)
R538	1-220-878-81	s	RES, CHIP 22 (1005)
R539	1-220-878-81	s	RES, CHIP 22 (1005)
R540	1-208-911-81	s	RES, CHIP 10K (1005)
R541	1-208-887-81	s	RES, CHIP 1.0K (1005)
R542	1-220-878-81	s	RES, CHIP 22 (1005)
R543	1-220-878-81	s	RES, CHIP 22 (1005)
R544	1-220-878-81	s	RES, CHIP 22 (1005)
R545	1-220-878-81	s	RES, CHIP 22 (1005)
R546	1-220-878-81	s	RES, CHIP 22 (1005)
R547	1-220-878-81	s	RES, CHIP 22 (1005)
R548	1-220-878-81	s	RES, CHIP 22 (1005)
R549	1-220-878-81	s	RES, CHIP 22 (1005)
R550	1-220-878-81	s	RES, CHIP 22 (1005)
R551	1-220-878-81	s	RES, CHIP 22 (1005)
R552	1-220-878-81	s	RES, CHIP 22 (1005)
R553	1-220-878-81	s	RES, CHIP 22 (1005)
R554	1-220-878-81	s	RES, CHIP 22 (1005)
R555	1-220-878-81	s	RES, CHIP 22 (1005)
R556	1-220-878-81	s	RES, CHIP 22 (1005)
R557	1-220-878-81	s	RES, CHIP 22 (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-208-935-81	s	RES, CHIP 100K (1005)
R902	1-220-878-81	s	RES, CHIP 22 (1005)
R903	1-220-878-81	s	RES, CHIP 22 (1005)
R904	1-220-878-81	s	RES, CHIP 22 (1005)
R905	1-220-878-81	s	RES, CHIP 22 (1005)
R909	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R910	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R917	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R918	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R923	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R924	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R925	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R926	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R927	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R928	1-208-887-81	s	RES, CHIP 1.0K (1005)
R929	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1011	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1101	1-220-878-81	s	RES, CHIP 22 (1005)
R1102	1-220-878-81	s	RES, CHIP 22 (1005)
R1103	1-220-878-81	s	RES, CHIP 22 (1005)
R1104	1-220-878-81	s	RES, CHIP 22 (1005)
R1105	1-220-878-81	s	RES, CHIP 22 (1005)
R1106	1-220-878-81	s	RES, CHIP 22 (1005)
R1107	1-220-878-81	s	RES, CHIP 22 (1005)
R1108	1-220-878-81	s	RES, CHIP 22 (1005)
R1109	1-208-935-81	s	RES, CHIP 100K (1005)
R1110	1-208-935-81	s	RES, CHIP 100K (1005)
R1111	1-208-935-81	s	RES, CHIP 100K (1005)
R1112	1-208-935-81	s	RES, CHIP 100K (1005)
R1113	1-208-935-81	s	RES, CHIP 100K (1005)
R1114	1-208-935-81	s	RES, CHIP 100K (1005)
R1115	1-208-935-81	s	RES, CHIP 100K (1005)
R1116	1-208-935-81	s	RES, CHIP 100K (1005)
R1118	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1119	1-208-871-81	s	RES, CHIP 220 (1005)
R1120	1-208-871-81	s	RES, CHIP 220 (1005)
R1121	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1122	1-208-871-81	s	RES, CHIP 220 (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1126	1-220-878-81	s	RES, CHIP 22 (1005)
R1127	1-220-878-81	s	RES, CHIP 22 (1005)
R1128	1-220-878-81	s	RES, CHIP 22 (1005)
R1129	1-220-878-81	s	RES, CHIP 22 (1005)
R1130	1-220-878-81	s	RES, CHIP 22 (1005)
R1131	1-220-878-81	s	RES, CHIP 22 (1005)
R1132	1-220-878-81	s	RES, CHIP 22 (1005)
R1133	1-220-878-81	s	RES, CHIP 22 (1005)
R1134	1-220-878-81	s	RES, CHIP 22 (1005)
R1135	1-220-878-81	s	RES, CHIP 22 (1005)
R1136	1-220-878-81	s	RES, CHIP 22 (1005)
R1137	1-220-878-81	s	RES, CHIP 22 (1005)
R1138	1-220-878-81	s	RES, CHIP 22 (1005)
R1139	1-220-878-81	s	RES, CHIP 22 (1005)
R1140	1-220-878-81	s	RES, CHIP 22 (1005)
R1141	1-220-878-81	s	RES, CHIP 22 (1005)
R1142	1-220-878-81	s	RES, CHIP 22 (1005)
R1143	1-220-878-81	s	RES, CHIP 22 (1005)
R1144	1-208-911-81	s	RES, CHIP 10K (1005)
R1145	1-208-911-81	s	RES, CHIP 10K (1005)
R1146	1-208-911-81	s	RES, CHIP 10K (1005)
R1147	1-208-911-81	s	RES, CHIP 10K (1005)
R1148	1-208-911-81	s	RES, CHIP 10K (1005)
R1149	1-208-911-81	s	RES, CHIP 10K (1005)
R1150	1-208-911-81	s	RES, CHIP 10K (1005)
R1151	1-208-911-81	s	RES, CHIP 10K (1005)
R1152	1-208-911-81	s	RES, CHIP 10K (1005)
R1153	1-208-911-81	s	RES, CHIP 10K (1005)
R1154	1-208-911-81	s	RES, CHIP 10K (1005)
R1155	1-208-911-81	s	RES, CHIP 10K (1005)
R1156	1-208-911-81	s	RES, CHIP 10K (1005)
R1157	1-208-911-81	s	RES, CHIP 10K (1005)
R1162	1-208-911-81	s	RES, CHIP 10K (1005)
R1163	1-208-911-81	s	RES, CHIP 10K (1005)
R1164	1-208-911-81	s	RES, CHIP 10K (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1165	1-208-911-81	s	RES, CHIP 10K (1005)
R1166	1-208-935-81	s	RES, CHIP 100K (1005)
R1167	1-208-935-81	s	RES, CHIP 100K (1005)
R1168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1170	1-208-911-81	s	RES, CHIP 10K (1005)
R1172	1-208-911-81	s	RES, CHIP 10K (1005)
R1175	1-208-911-81	s	RES, CHIP 10K (1005)
R1177	1-208-911-81	s	RES, CHIP 10K (1005)
R1179	1-208-911-81	s	RES, CHIP 10K (1005)
R1181	1-208-911-81	s	RES, CHIP 10K (1005)
R1184	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1221	1-208-879-81	s	RES, CHIP 470 (1005)
R1222	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1224	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-208-911-81	s	RES, CHIP 10K (1005)
R1230	1-208-911-81	s	RES, CHIP 10K (1005)
R1231	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-911-81	s	RES, CHIP 10K (1005)
R1302	1-208-911-81	s	RES, CHIP 10K (1005)
R1303	1-208-911-81	s	RES, CHIP 10K (1005)
R1304	1-208-911-81	s	RES, CHIP 10K (1005)
R1305	1-208-911-81	s	RES, CHIP 10K (1005)
R1306	1-208-911-81	s	RES, CHIP 10K (1005)
R1307	1-208-911-81	s	RES, CHIP 10K (1005)
R1401	1-208-879-81	s	RES, CHIP 470 (1005)
R1402	1-208-911-81	s	RES, CHIP 10K (1005)
R1404	1-208-911-81	s	RES, CHIP 10K (1005)
R1407	1-208-911-81	s	RES, CHIP 10K (1005)
R1409	1-208-911-81	s	RES, CHIP 10K (1005)
R1410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1424	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1429	1-208-863-81	s	RES, CHIP 100 (1005)
R1430	1-208-863-81	s	RES, CHIP 100 (1005)
R1431	1-208-863-81	s	RES, CHIP 100 (1005)
R1432	1-208-863-81	s	RES, CHIP 100 (1005)
R1433	1-208-863-81	s	RES, CHIP 100 (1005)
R1434	1-208-863-81	s	RES, CHIP 100 (1005)
R1435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1439	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1501	1-208-911-81	s	RES, CHIP 10K (1005)
R1503	1-208-911-81	s	RES, CHIP 10K (1005)
R1504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1505	1-208-911-81	s	RES, CHIP 10K (1005)
R1506	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1507	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1509	1-208-911-81	s	RES, CHIP 10K (1005)
R1510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1511	1-208-911-81	s	RES, CHIP 10K (1005)
R1512	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1514	1-208-911-81	s	RES, CHIP 10K (1005)
R1516	1-208-911-81	s	RES, CHIP 10K (1005)
R1517	1-208-911-81	s	RES, CHIP 10K (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1525	1-208-863-81	s	RES, CHIP 100 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1531	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-208-863-81	s	RES, CHIP 100 (1005)
R1533	1-208-863-81	s	RES, CHIP 100 (1005)
R1534	1-208-863-81	s	RES, CHIP 100 (1005)
R1535	1-208-863-81	s	RES, CHIP 100 (1005)
R1536	1-208-863-81	s	RES, CHIP 100 (1005)
R1539	1-208-863-81	s	RES, CHIP 100 (1005)
R1540	1-208-863-81	s	RES, CHIP 100 (1005)
R1601	1-208-911-81	s	RES, CHIP 10K (1005)
R1602	1-208-911-81	s	RES, CHIP 10K (1005)
R1603	1-208-911-81	s	RES, CHIP 10K (1005)
R1604	1-208-911-81	s	RES, CHIP 10K (1005)
R1605	1-208-911-81	s	RES, CHIP 10K (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1701	1-208-911-81	s	RES, CHIP 10K (1005)
R1702	1-208-911-81	s	RES, CHIP 10K (1005)
R2001	1-220-878-81	s	RES, CHIP 22 (1005)
R2002	1-220-878-81	s	RES, CHIP 22 (1005)
R2003	1-220-878-81	s	RES, CHIP 22 (1005)
R2004	1-220-878-81	s	RES, CHIP 22 (1005)
R2005	1-220-878-81	s	RES, CHIP 22 (1005)
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2049	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-208-855-81	s	RES, CHIP 47 (1005)
R2107	1-208-855-81	s	RES, CHIP 47 (1005)
R2108	1-208-855-81	s	RES, CHIP 47 (1005)
R2109	1-208-855-81	s	RES, CHIP 47 (1005)
R2110	1-220-878-81	s	RES, CHIP 22 (1005)
R2111	1-220-878-81	s	RES, CHIP 22 (1005)
R2114	1-208-911-81	s	RES, CHIP 10K (1005)
R2115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2118	1-208-911-81	s	RES, CHIP 10K (1005)
R2119	1-208-911-81	s	RES, CHIP 10K (1005)
R2120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2123	1-208-855-81	s	RES, CHIP 47 (1005)
R2124	1-208-855-81	s	RES, CHIP 47 (1005)
R2125	1-208-855-81	s	RES, CHIP 47 (1005)
R2126	1-208-855-81	s	RES, CHIP 47 (1005)
R2127	1-220-878-81	s	RES, CHIP 22 (1005)
R2128	1-208-855-81	s	RES, CHIP 47 (1005)
R2129	1-208-855-81	s	RES, CHIP 47 (1005)
R2130	1-208-855-81	s	RES, CHIP 47 (1005)
R2131	1-208-855-81	s	RES, CHIP 47 (1005)
R2132	1-208-855-81	s	RES, CHIP 47 (1005)
R2133	1-208-855-81	s	RES, CHIP 47 (1005)
R2134	1-208-855-81	s	RES, CHIP 47 (1005)
R2135	1-208-855-81	s	RES, CHIP 47 (1005)
R2136	1-220-878-81	s	RES, CHIP 22 (1005)
R2137	1-220-878-81	s	RES, CHIP 22 (1005)
R2140	1-208-911-81	s	RES, CHIP 10K (1005)
R2141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2144	1-208-911-81	s	RES, CHIP 10K (1005)
R2145	1-208-911-81	s	RES, CHIP 10K (1005)
R2146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2148	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2149	1-208-855-81	s	RES, CHIP 47 (1005)
R2150	1-208-855-81	s	RES, CHIP 47 (1005)
R2151	1-208-855-81	s	RES, CHIP 47 (1005)
R2152	1-208-855-81	s	RES, CHIP 47 (1005)
R2201	1-208-855-81	s	RES, CHIP 47 (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-855-81	s	RES, CHIP 47 (1005)
R2205	1-208-855-81	s	RES, CHIP 47 (1005)
R2206	1-208-855-81	s	RES, CHIP 47 (1005)
R2207	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2208	1-220-878-81	s	RES, CHIP 22 (1005)
R2209	1-220-878-81	s	RES, CHIP 22 (1005)
R2210	1-220-878-81	s	RES, CHIP 22 (1005)
R2211	1-208-855-81	s	RES, CHIP 47 (1005)
R2212	1-208-855-81	s	RES, CHIP 47 (1005)
R2213	1-208-855-81	s	RES, CHIP 47 (1005)
R2214	1-208-855-81	s	RES, CHIP 47 (1005)
R2215	1-208-863-81	s	RES, CHIP 100 (1005)
R2216	1-208-863-81	s	RES, CHIP 100 (1005)
R2217	1-208-863-81	s	RES, CHIP 100 (1005)
R2218	1-208-863-81	s	RES, CHIP 100 (1005)
R2219	1-208-863-81	s	RES, CHIP 100 (1005)
R2220	1-208-863-81	s	RES, CHIP 100 (1005)
R2221	1-208-863-81	s	RES, CHIP 100 (1005)
R2222	1-208-863-81	s	RES, CHIP 100 (1005)
R2223	1-208-863-81	s	RES, CHIP 100 (1005)
R2224	1-208-863-81	s	RES, CHIP 100 (1005)
R2225	1-208-863-81	s	RES, CHIP 100 (1005)
R2226	1-208-863-81	s	RES, CHIP 100 (1005)
R2227	1-208-863-81	s	RES, CHIP 100 (1005)
R2228	1-208-863-81	s	RES, CHIP 100 (1005)
R2229	1-208-863-81	s	RES, CHIP 100 (1005)
R2230	1-208-863-81	s	RES, CHIP 100 (1005)
R2231	1-208-863-81	s	RES, CHIP 100 (1005)
R2232	1-208-863-81	s	RES, CHIP 100 (1005)
R2233	1-208-863-81	s	RES, CHIP 100 (1005)
R2234	1-208-863-81	s	RES, CHIP 100 (1005)
R2401	1-208-855-81	s	RES, CHIP 47 (1005)
R2402	1-208-855-81	s	RES, CHIP 47 (1005)
R2403	1-208-855-81	s	RES, CHIP 47 (1005)
R2404	1-208-855-81	s	RES, CHIP 47 (1005)
R2405	1-208-855-81	s	RES, CHIP 47 (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-220-878-81	s	RES, CHIP 22 (1005)
R2408	1-220-878-81	s	RES, CHIP 22 (1005)
R2409	1-220-878-81	s	RES, CHIP 22 (1005)
R2410	1-220-878-81	s	RES, CHIP 22 (1005)
R2411	1-208-855-81	s	RES, CHIP 47 (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-855-81	s	RES, CHIP 47 (1005)
R2414	1-208-855-81	s	RES, CHIP 47 (1005)
R2415	1-208-863-81	s	RES, CHIP 100 (1005)
R2416	1-208-863-81	s	RES, CHIP 100 (1005)
R2417	1-208-863-81	s	RES, CHIP 100 (1005)
R2418	1-208-863-81	s	RES, CHIP 100 (1005)
R2419	1-208-863-81	s	RES, CHIP 100 (1005)
R2420	1-208-863-81	s	RES, CHIP 100 (1005)
R2421	1-208-863-81	s	RES, CHIP 100 (1005)
R2422	1-208-863-81	s	RES, CHIP 100 (1005)
R2423	1-208-863-81	s	RES, CHIP 100 (1005)
R2424	1-208-863-81	s	RES, CHIP 100 (1005)
R2425	1-208-863-81	s	RES, CHIP 100 (1005)
R2426	1-208-863-81	s	RES, CHIP 100 (1005)
R2427	1-208-863-81	s	RES, CHIP 100 (1005)
R2428	1-208-863-81	s	RES, CHIP 100 (1005)
R2429	1-208-863-81	s	RES, CHIP 100 (1005)
R2430	1-208-863-81	s	RES, CHIP 100 (1005)
R2431	1-208-863-81	s	RES, CHIP 100 (1005)
R2432	1-208-863-81	s	RES, CHIP 100 (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2433	1-208-863-81	s	RES, CHIP 100 (1005)
R2434	1-208-863-81	s	RES, CHIP 100 (1005)
R2601	1-208-927-81	s	RES, CHIP 47K (1005)
R2602	1-208-927-81	s	RES, CHIP 47K (1005)
R2603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2604	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2605	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2606	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2607	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2608	1-208-715-11	s	RES, CHIP 22K (1005)
R2609	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2610	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2611	1-208-863-81	s	RES, CHIP 100 (1005)
R2612	1-208-863-81	s	RES, CHIP 100 (1005)
R2701	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2802	1-208-863-81	s	RES, CHIP 100 (1005)
R2803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2804	1-208-863-81	s	RES, CHIP 100 (1005)
R2805	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2806	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2808	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2901	1-208-911-81	s	RES, CHIP 10K (1005)
R2902	1-208-911-81	s	RES, CHIP 10K (1005)
R2903	1-208-855-81	s	RES, CHIP 47 (1005)
R2904	1-208-855-81	s	RES, CHIP 47 (1005)
R2905	1-208-855-81	s	RES, CHIP 47 (1005)
R2906	1-208-855-81	s	RES, CHIP 47 (1005)
R2907	1-208-855-81	s	RES, CHIP 47 (1005)
R2908	1-208-855-81	s	RES, CHIP 47 (1005)
R2909	1-208-855-81	s	RES, CHIP 47 (1005)
R2910	1-208-855-81	s	RES, CHIP 47 (1005)
R2911	1-208-855-81	s	RES, CHIP 47 (1005)
R2912	1-208-855-81	s	RES, CHIP 47 (1005)
R3001	1-220-878-81	s	RES, CHIP 22 (1005)
R3002	1-220-878-81	s	RES, CHIP 22 (1005)
R3101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3102	1-220-878-81	s	RES, CHIP 22 (1005)
R3103	1-208-911-81	s	RES, CHIP 10K (1005)
R3105	1-208-911-81	s	RES, CHIP 10K (1005)
R3107	1-208-911-81	s	RES, CHIP 10K (1005)
R3108	1-208-911-81	s	RES, CHIP 10K (1005)
R3111	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3112	1-220-878-81	s	RES, CHIP 22 (1005)
R3113	1-208-935-81	s	RES, CHIP 100K (1005)
R3114	1-220-878-81	s	RES, CHIP 22 (1005)
R3115	1-220-878-81	s	RES, CHIP 22 (1005)
R3116	1-208-911-81	s	RES, CHIP 10K (1005)
R3118	1-208-935-81	s	RES, CHIP 100K (1005)
R3119	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3120	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3121	1-208-911-81	s	RES, CHIP 10K (1005)
R3122	1-208-863-81	s	RES, CHIP 100 (1005)
R3123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3124	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3126	1-208-911-81	s	RES, CHIP 10K (1005)
R3127	1-208-911-81	s	RES, CHIP 10K (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3203	1-208-863-81	s	RES, CHIP 100 (1005)
R3204	1-208-863-81	s	RES, CHIP 100 (1005)
R3205	1-220-878-81	s	RES, CHIP 22 (1005)
R3206	1-220-878-81	s	RES, CHIP 22 (1005)
R3207	1-220-878-81	s	RES, CHIP 22 (1005)
R3208	1-220-878-81	s	RES, CHIP 22 (1005)
R3209	1-220-878-81	s	RES, CHIP 22 (1005)
R3210	1-220-878-81	s	RES, CHIP 22 (1005)
R3211	1-220-878-81	s	RES, CHIP 22 (1005)
R3212	1-220-878-81	s	RES, CHIP 22 (1005)
R3213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3215	1-208-911-81	s	RES, CHIP 10K (1005)
R3216	1-208-911-81	s	RES, CHIP 10K (1005)
R3301	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3302	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3303	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3304	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3305	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3401	1-220-878-81	s	RES, CHIP 22 (1005)
R3402	1-220-878-81	s	RES, CHIP 22 (1005)
R3501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3502	1-220-878-81	s	RES, CHIP 22 (1005)
R3503	1-208-911-81	s	RES, CHIP 10K (1005)
R3505	1-208-911-81	s	RES, CHIP 10K (1005)
R3507	1-208-911-81	s	RES, CHIP 10K (1005)
R3510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3511	1-208-935-81	s	RES, CHIP 100K (1005)
R3512	1-208-911-81	s	RES, CHIP 10K (1005)
R3514	1-208-935-81	s	RES, CHIP 100K (1005)
R3515	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3516	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3517	1-208-911-81	s	RES, CHIP 10K (1005)
R3518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3521	1-208-911-81	s	RES, CHIP 10K (1005)
R3522	1-208-911-81	s	RES, CHIP 10K (1005)
R3523	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3524	1-208-855-81	s	RES, CHIP 47 (1005)
R3603	1-208-863-81	s	RES, CHIP 100 (1005)
R3604	1-208-863-81	s	RES, CHIP 100 (1005)
R3605	1-220-878-81	s	RES, CHIP 22 (1005)
R3606	1-220-878-81	s	RES, CHIP 22 (1005)
R3607	1-220-878-81	s	RES, CHIP 22 (1005)
R3608	1-220-878-81	s	RES, CHIP 22 (1005)
R3609	1-220-878-81	s	RES, CHIP 22 (1005)
R3610	1-220-878-81	s	RES, CHIP 22 (1005)
R3611	1-220-878-81	s	RES, CHIP 22 (1005)
R3612	1-220-878-81	s	RES, CHIP 22 (1005)
R3613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3615	1-208-911-81	s	RES, CHIP 10K (1005)
R3616	1-208-911-81	s	RES, CHIP 10K (1005)
R3701	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3702	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3703	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3704	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3705	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R3801	1-220-878-81	s	RES, CHIP 22 (1005)
R3901	1-208-927-81	s	RES, CHIP 47K (1005)
R3902	1-208-927-81	s	RES, CHIP 47K (1005)
R3903	1-208-927-81	s	RES, CHIP 47K (1005)
R3904	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3905	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3906	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3907	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3909	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3910	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3911	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3912	1-208-715-11	s	RES, CHIP 22K (1005)
R3913	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3914	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3915	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3916	1-208-863-81	s	RES, CHIP 100 (1005)
R3917	1-208-863-81	s	RES, CHIP 100 (1005)
R3918	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3920	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3921	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4001	1-208-927-81	s	RES, CHIP 47K (1005)
R4002	1-208-927-81	s	RES, CHIP 47K (1005)
R4003	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4004	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4005	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4006	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4007	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4008	1-208-715-11	s	RES, CHIP 22K (1005)
R4009	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4010	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4011	1-208-863-81	s	RES, CHIP 100 (1005)
R4012	1-208-863-81	s	RES, CHIP 100 (1005)
R4013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4101	1-208-927-81	s	RES, CHIP 47K (1005)
R4102	1-208-927-81	s	RES, CHIP 47K (1005)
R4103	1-208-927-81	s	RES, CHIP 47K (1005)
R4104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4108	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4109	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4111	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4112	1-208-715-11	s	RES, CHIP 22K (1005)
R4113	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4114	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4115	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4116	1-208-863-81	s	RES, CHIP 100 (1005)
R4117	1-208-863-81	s	RES, CHIP 100 (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4201	1-208-927-81	s	RES, CHIP 47K (1005)
R4202	1-208-927-81	s	RES, CHIP 47K (1005)
R4203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4208	1-208-715-11	s	RES, CHIP 22K (1005)
R4209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4211	1-208-863-81	s	RES, CHIP 100 (1005)
R4212	1-208-863-81	s	RES, CHIP 100 (1005)
R4213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4301	1-208-927-81	s	RES, CHIP 47K (1005)
R4302	1-208-927-81	s	RES, CHIP 47K (1005)
R4303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4305	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4306	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4307	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4308	1-208-715-11	s	RES, CHIP 22K (1005)
R4309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4311	1-208-863-81	s	RES, CHIP 100 (1005)
R4312	1-208-863-81	s	RES, CHIP 100 (1005)
R4313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4401	1-208-927-81	s	RES, CHIP 47K (1005)
R4402	1-208-927-81	s	RES, CHIP 47K (1005)
R4403	1-208-927-81	s	RES, CHIP 47K (1005)
R4404	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4405	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4406	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4407	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4408	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4409	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4410	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4412	1-208-715-11	s	RES, CHIP 22K (1005)
R4413	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4415	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4416	1-208-863-81	s	RES, CHIP 100 (1005)
R4417	1-208-863-81	s	RES, CHIP 100 (1005)
R4418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4501	1-208-927-81	s	RES, CHIP 47K (1005)
R4502	1-208-927-81	s	RES, CHIP 47K (1005)
R4503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4504	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4505	1-208-887-81	s	RES, CHIP 1.0K (1005)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4506	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4507	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4508	1-208-715-11	s	RES, CHIP 22K (1005)
R4509	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4510	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4511	1-208-863-81	s	RES, CHIP 100 (1005)
R4512	1-208-863-81	s	RES, CHIP 100 (1005)
R4513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB702	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB703	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB704	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB718	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB719	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB720	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB721	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB722	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB723	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB724	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB802	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB803	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB804	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB805	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB806	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB807	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB808	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB813	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB814	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB815	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB816	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB817	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB818	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB819	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB820	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB821	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB822	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB823	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB824	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB825	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB826	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB827	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB828	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB829	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB830	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB831	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB832	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB833	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB834	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB835	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB836	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1502	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1503	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1504	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1505	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1506	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1507	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2119	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2121	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2122	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2123	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2124	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2205	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2206	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2207	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2208	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2211	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2212	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2213	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2401	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2402	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2403	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2404	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2413	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2416	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2417	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2701	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2702	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2703	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2704	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2705	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB3101	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3102	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3502	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP2601	1-535-877-22	s	CHIP, CHECKER
TP2602	1-535-877-22	s	CHIP, CHECKER
TP2701	1-535-877-22	s	CHIP, CHECKER
TP3901	1-535-877-22	s	CHIP, CHECKER
TP3902	1-535-877-22	s	CHIP, CHECKER
TP3903	1-535-877-22	s	CHIP, CHECKER
TP4001	1-535-877-22	s	CHIP, CHECKER
TP4002	1-535-877-22	s	CHIP, CHECKER

(OUT-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP4101	1-535-877-22	s	CHIP, CHECKER
TP4102	1-535-877-22	s	CHIP, CHECKER
TP4103	1-535-877-22	s	CHIP, CHECKER
TP4201	1-535-877-22	s	CHIP, CHECKER
TP4202	1-535-877-22	s	CHIP, CHECKER
TP4301	1-535-877-22	s	CHIP, CHECKER
TP4302	1-535-877-22	s	CHIP, CHECKER
TP4401	1-535-877-22	s	CHIP, CHECKER
TP4402	1-535-877-22	s	CHIP, CHECKER
TP4403	1-535-877-22	s	CHIP, CHECKER
TP4501	1-535-877-22	s	CHIP, CHECKER
TP4502	1-535-877-22	s	CHIP, CHECKER
X501	1-813-488-11	s	OSCILLATOR, CRYSTAL
X502	1-795-983-11	s	OSCILLATOR, CRYSTAL
X3101	1-813-480-11	s	OSCILLATOR, CRYSTAL

OUT-35A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
12pcs	4-143-557-01	s	SPRING, COMPRESSION
12pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
7pcs	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
1pc	7-626-320-61	s	PIN, SPRING 3X18
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C228	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C229	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C230	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C231	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C232	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C233	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C234	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C235	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C236	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C237	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C238	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C239	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C240	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C243	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C244	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C245	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C246	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C247	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C248	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C249	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C250	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C251	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C252	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C253	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C254	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C255	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C256	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C257	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C258	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C259	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C260	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C261	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C262	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C263	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C264	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C265	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C301	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C302	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C303	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C304	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C418	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C419	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C420	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C423	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C424	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C427	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C428	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C431	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C432	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C435	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C436	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C439	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C440	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C443	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C444	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C447	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C448	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C451	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C452	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C453	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C454	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1119	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1121	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1604	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1605	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1607	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1608	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1609	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1610	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1611	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1612	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1613	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1614	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1615	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1616	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1617	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1618	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1619	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1620	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1621	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1622	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1623	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1624	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1625	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1626	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1627	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1628	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1629	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1630	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1631	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1632	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1633	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1634	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1635	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1636	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1701	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1702	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1703	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1704	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1705	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1706	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1707	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1708	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1709	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1711	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1712	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1713	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1714	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1715	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1716	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1717	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1718	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1719	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1720	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1721	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1722	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1723	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1724	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1725	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1726	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1727	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1728	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1729	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1730	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1731	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1732	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1801	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1802	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1803	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1804	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1805	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1806	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1807	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1808	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1809	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1810	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1811	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1813	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1815	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1816	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1817	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1818	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1819	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1820	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1901	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1902	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1903	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1904	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1905	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1906	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1907	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1908	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1909	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1910	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1911	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1912	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1913	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1914	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1915	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1916	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1933	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1934	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1935	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1936	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1937	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1938	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1939	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1940	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1941	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1942	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1943	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1944	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2201	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2202	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2203	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2307	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2322	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2328	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2329	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2333	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2338	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2341	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2343	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2348	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2355	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2358	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2362	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2369	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2371	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2373	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2378	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2381	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2383	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2507	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2509	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2513	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2516	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2528	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2529	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2533	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2534	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2535	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2536	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2537	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2538	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2539	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2540	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2541	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2542	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2543	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2544	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2545	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2547	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2548	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2549	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2551	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2558	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2560	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2562	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2568	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2569	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2570	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2571	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2572	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2573	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2574	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2575	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2577	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2578	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2579	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2580	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2581	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2582	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2583	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2607	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2608	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2609	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2610	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2611	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2612	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2613	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2614	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2616	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2618	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2619	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2620	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2621	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2622	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2623	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2624	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2625	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2626	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2627	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2628	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2629	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2630	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2631	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2632	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2633	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2634	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2635	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2637	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2639	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2641	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2643	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2646	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2648	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2649	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2650	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2653	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2654	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2655	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2656	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2658	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2659	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2660	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2661	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2662	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2663	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2664	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2666	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2667	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2668	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2669	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2670	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2671	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2672	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2673	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2674	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2675	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2676	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2677	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2679	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2680	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2681	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2682	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2683	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2685	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2686	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2687	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2819	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2902	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2903	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2904	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2916	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2926	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2953	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2961	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2962	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2963	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2968	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2969	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2970	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2972	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2974	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2975	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2976	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2977	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2978	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2979	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2981	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2982	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2983	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2986	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2987	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2991	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2992	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2994	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2995	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2996	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2997	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2999	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3902	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3903	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3904	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3910	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3911	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3912	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3913	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3914	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3915	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3916	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3917	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3918	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3919	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3920	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3921	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3922	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3923	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3924	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3925	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3926	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3927	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3928	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3929	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3930	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3931	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3932	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C3933	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3934	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3935	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3940	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3942	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3953	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3958	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3960	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3964	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3965	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3968	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3969	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3970	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3972	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3973	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3974	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3975	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3977	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3979	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3981	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3983	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3987	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3989	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4002	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4003	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4004	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4007	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4008	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4009	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4010	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4011	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4012	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4013	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4014	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4015	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4016	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4017	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4018	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4019	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4020	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4021	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4022	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4023	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4024	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4025	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4026	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4027	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4028	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4029	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4030	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4053	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4054	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4057	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4058	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4060	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4062	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4065	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4067	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4068	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4073	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4077	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4079	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4081	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4083	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4085	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4101	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4102	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4105	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4106	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4110	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4111	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4112	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4113	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4114	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4115	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4116	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4117	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4118	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4119	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4120	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4121	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4122	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4123	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4124	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4125	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4126	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4127	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4128	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4129	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4130	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4131	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4132	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4133	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4134	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4135	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4140	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4142	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4148	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4150	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4156	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4158	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4165	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4168	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4170	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4172	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4173	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4177	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4204	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4207	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4208	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4209	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4210	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4211	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4212	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4213	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4214	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4215	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4216	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4217	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4218	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4219	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4220	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4221	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4222	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4223	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4224	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4225	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4226	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4227	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4228	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4229	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4230	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4257	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4260	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4267	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4268	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4271	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4276	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4280	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4307	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4308	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4309	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4310	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4311	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4312	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4313	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4314	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4315	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4316	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4317	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4318	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4319	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4320	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4321	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4322	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4323	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4324	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4325	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4326	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4327	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4328	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4329	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4330	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4353	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4360	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4367	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4371	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4373	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4379	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4385	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4404	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4410	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4411	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4412	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4413	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4416	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4417	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4418	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4419	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4420	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4421	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4422	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4423	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4424	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4425	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4426	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4427	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4428	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4429	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4430	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4431	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4432	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C4433	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4434	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4435	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4443	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4458	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4462	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4465	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4466	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4468	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4470	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4472	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4474	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4476	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4480	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4482	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4484	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4485	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4486	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4487	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4488	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4489	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4490	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1501	1-770-627-21	s	PIN, CONNECTOR 10P
CN1502	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1503	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D302	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D307	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-598-01	s	DI SML-D12U8WT86
D402	6-502-598-01	s	DI SML-D12U8WT86
D1101	6-502-352-01	s	DI SML-522MU8WT86PQ
D1102	6-502-352-01	s	DI SML-522MU8WT86PQ
D1103	6-502-598-01	s	DI SML-D12U8WT86
D1104	6-501-436-01	s	DIODE SML412BC6TT86
D1201	6-502-598-01	s	DI SML-D12U8WT86
D1202	6-502-598-01	s	DI SML-D12U8WT86
D2601	8-719-069-28	s	DI 1SS400FJTE61
D2602	8-719-069-28	s	DI 1SS400FJTE61
D2701	6-502-197-01	s	DI SML-D12M8WT86SM
D2702	6-502-197-01	s	DI SML-D12M8WT86SM
D2703	6-502-197-01	s	DI SML-D12M8WT86SM
D2704	6-502-197-01	s	DI SML-D12M8WT86SM
D2705	6-502-197-01	s	DI SML-D12M8WT86SM
D2706	6-502-197-01	s	DI SML-D12M8WT86SM
D2707	6-502-197-01	s	DI SML-D12M8WT86SM
D2708	6-502-197-01	s	DI SML-D12M8WT86SM
D2709	6-502-197-01	s	DI SML-D12M8WT86SM
D2710	6-502-197-01	s	DI SML-D12M8WT86SM
D2711	6-502-197-01	s	DI SML-D12M8WT86SM
D2712	6-502-197-01	s	DI SML-D12M8WT86SM

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D2713	6-502-197-01	s	DI SML-D12M8WT86SM
D2714	6-502-197-01	s	DI SML-D12M8WT86SM
D2715	6-502-197-01	s	DI SML-D12M8WT86SM
D2716	6-502-197-01	s	DI SML-D12M8WT86SM
D2717	6-502-197-01	s	DI SML-D12M8WT86SM
D2718	6-502-197-01	s	DI SML-D12M8WT86SM
D2719	6-502-197-01	s	DI SML-D12M8WT86SM
D2720	6-502-197-01	s	DI SML-D12M8WT86SM
D3901	8-719-069-28	s	DI 1SS400FJTE61
D3902	8-719-069-28	s	DI 1SS400FJTE61
D3903	8-719-069-28	s	DI 1SS400FJTE61
D4001	8-719-069-28	s	DI 1SS400FJTE61
D4002	8-719-069-28	s	DI 1SS400FJTE61
D4101	8-719-069-28	s	DI 1SS400FJTE61
D4102	8-719-069-28	s	DI 1SS400FJTE61
D4103	8-719-069-28	s	DI 1SS400FJTE61
D4201	8-719-069-28	s	DI 1SS400FJTE61
D4202	8-719-069-28	s	DI 1SS400FJTE61
D4301	8-719-069-28	s	DI 1SS400FJTE61
D4302	8-719-069-28	s	DI 1SS400FJTE61
D4401	8-719-069-28	s	DI 1SS400FJTE61
D4402	8-719-069-28	s	DI 1SS400FJTE61
D4403	8-719-069-28	s	DI 1SS400FJTE61
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
DD207	1-487-092-11	s	DC-DC CONVERTER
E301	1-535-877-22	s	CHIP, CHECKER
E302	1-535-877-22	s	CHIP, CHECKER
E303	1-535-877-22	s	CHIP, CHECKER
E304	1-535-877-22	s	CHIP, CHECKER
E305	1-535-877-22	s	CHIP, CHECKER
E306	1-535-877-22	s	CHIP, CHECKER
E307	1-535-877-22	s	CHIP, CHECKER
E308	1-535-877-22	s	CHIP, CHECKER
E309	1-535-877-22	s	CHIP, CHECKER
E310	1-535-877-22	s	CHIP, CHECKER
E311	1-535-877-22	s	CHIP, CHECKER
E312	1-535-877-22	s	CHIP, CHECKER
E313	1-535-877-22	s	CHIP, CHECKER
E314	1-535-877-22	s	CHIP, CHECKER
E315	1-535-877-22	s	CHIP, CHECKER
E316	1-535-877-22	s	CHIP, CHECKER
E317	1-535-877-22	s	CHIP, CHECKER
E318	1-535-877-22	s	CHIP, CHECKER
E319	1-535-877-22	s	CHIP, CHECKER
E320	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F207	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F208	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2201	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2601	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2602	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2603	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2901	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2902	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2903	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2904	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC14	6-710-620-01	s	IC EDD2516AETA-5B-E
IC15	6-710-620-01	s	IC EDD2516AETA-5B-E
IC16	6-710-620-01	s	IC EDD2516AETA-5B-E
IC17	6-710-620-01	s	IC EDD2516AETA-5B-E
IC18	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC19	6-713-838-01	s	IC EDE1116AEBG-8E-F-TR
IC301	8-759-338-95	s	IC NJM2903V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC401	6-714-616-11	s	IC DS90LV110ATMTX
IC402	6-714-109-01	s	IC LMK03000CISQ
IC403	6-714-109-01	s	IC LMK03000CISQ
IC404	6-714-616-11	s	IC DS90LV110ATMTX
IC405	6-714-616-11	s	IC DS90LV110ATMTX
IC501	8-759-639-86	s	IC SN65LVDS32DR
IC502	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC503	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC504	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC505	6-708-324-01	s	IC R3112N301A-TR-FA
IC506	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC507	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC508	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC509	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC601	6-703-238-01	s	IC TC7WZ34FK(TE85R)
IC701	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC702	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC703	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC704	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC801	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC802	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC803	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC804	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC901	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC902	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC903	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC904	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC905	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC906	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1101	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC1102	6-710-018-01	s	IC CAT24C02WI-GT3

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1103	6-714-192-01	s	IC ADT75BRMZ-REEL
IC1201	6-714-463-01	s	IC M29W256GL70N6E
IC1202	6-707-842-01	s	IC TC74LCX08FT(EKJ)
IC1401	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1402	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1403	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1404	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1405	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1501	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1502	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1503	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC1504	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC2201	6-707-035-01	s	IC LP2996MRX
IC2701	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC2702	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC2703	6-707-852-01	s	IC TC74LCX540FT(EKJ)
IC2704	8-759-523-92	s	IC TC74VHC21FT(EL)
IC2705	8-759-523-92	s	IC TC74VHC21FT(EL)
IC2706	8-759-523-92	s	IC TC74VHC21FT(EL)
IC2901	8-759-388-62	s	IC NJU7062M(TE2)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L402	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L2301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2601	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2602	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2603	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2604	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2605	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2606	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2607	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2608	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2609	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2610	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2611	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2612	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2613	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2614	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2615	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2616	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2617	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3909	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3910	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3911	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3912	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3913	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3914	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3915	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3916	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L3917	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3918	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4007	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4008	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4009	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4010	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4011	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4012	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4013	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4014	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4015	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4016	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4017	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4018	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4105	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4106	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4109	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4110	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4111	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4112	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4113	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4114	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4115	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4116	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4117	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4118	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4208	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4209	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4210	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4211	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4212	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4213	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4214	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4215	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4216	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4217	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4218	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L4304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4309	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4310	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4311	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4312	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4313	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4314	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4315	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4316	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4317	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4318	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4405	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4406	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4407	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4408	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4409	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4410	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4411	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4412	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4413	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4414	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4415	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4416	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4417	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4418	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q312	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q313	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q314	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-218-985-11	s	RES, CHIP 470K (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-927-81	s	RES, CHIP 47K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-927-81	s	RES, CHIP 47K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-715-11	s	RES, CHIP 22K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-935-81	s	RES, CHIP 100K (1005)
R220	1-208-935-81	s	RES, CHIP 100K (1005)
R221	1-208-935-81	s	RES, CHIP 100K (1005)
R222	1-208-935-81	s	RES, CHIP 100K (1005)
R223	1-208-935-81	s	RES, CHIP 100K (1005)
R224	1-208-715-11	s	RES, CHIP 22K (1005)
R225	1-208-879-81	s	RES, CHIP 470 (1005)
R226	1-208-903-81	s	RES, CHIP 4.7K (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-903-81	s	RES, CHIP 4.7K (1005)
R230	1-208-927-81	s	RES, CHIP 47K (1005)
R231	1-208-927-81	s	RES, CHIP 47K (1005)
R232	1-208-927-81	s	RES, CHIP 47K (1005)
R233	1-208-903-81	s	RES, CHIP 4.7K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R238	1-208-935-81	s	RES, CHIP 100K (1005)
R239	1-208-935-81	s	RES, CHIP 100K (1005)
R241	1-208-911-81	s	RES, CHIP 10K (1005)
R242	1-208-895-81	s	RES, CHIP 2.2K (1005)
R243	1-208-911-81	s	RES, CHIP 10K (1005)
R244	1-208-903-81	s	RES, CHIP 4.7K (1005)
R245	1-208-903-81	s	RES, CHIP 4.7K (1005)
R246	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-911-81	s	RES, CHIP 10K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-895-81	s	RES, CHIP 2.2K (1005)
R310	1-208-887-81	s	RES, CHIP 1.0K (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-895-81	s	RES, CHIP 2.2K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-935-81	s	RES, CHIP 100K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-895-81	s	RES, CHIP 2.2K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-911-81	s	RES, CHIP 10K (1005)
R336	1-208-911-81	s	RES, CHIP 10K (1005)
R337	1-208-935-81	s	RES, CHIP 100K (1005)
R338	1-208-911-81	s	RES, CHIP 10K (1005)
R339	1-208-903-81	s	RES, CHIP 4.7K (1005)
R340	1-208-895-81	s	RES, CHIP 2.2K (1005)
R341	1-208-715-11	s	RES, CHIP 22K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-935-81	s	RES, CHIP 100K (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R346	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-208-927-81	s	RES, CHIP 47K (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-863-81	s	RES, CHIP 100 (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R433	1-218-825-91	s	RES, CHIP 120 (1608)
R436	1-218-825-91	s	RES, CHIP 120 (1608)
R437	1-208-895-81	s	RES, CHIP 2.2K (1005)
R438	1-208-895-81	s	RES, CHIP 2.2K (1005)
R439	1-218-825-91	s	RES, CHIP 120 (1608)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-218-825-91	s	RES, CHIP 120 (1608)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-208-863-81	s	RES, CHIP 100 (1005)
R446	1-208-863-81	s	RES, CHIP 100 (1005)
R447	1-208-903-81	s	RES, CHIP 4.7K (1005)
R448	1-208-903-81	s	RES, CHIP 4.7K (1005)
R501	1-220-878-81	s	RES, CHIP 22 (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-903-81	s	RES, CHIP 4.7K (1005)
R506	1-220-878-81	s	RES, CHIP 22 (1005)
R507	1-220-878-81	s	RES, CHIP 22 (1005)
R508	1-220-878-81	s	RES, CHIP 22 (1005)
R509	1-220-878-81	s	RES, CHIP 22 (1005)
R510	1-220-878-81	s	RES, CHIP 22 (1005)
R511	1-220-878-81	s	RES, CHIP 22 (1005)
R512	1-220-878-81	s	RES, CHIP 22 (1005)
R513	1-220-878-81	s	RES, CHIP 22 (1005)
R514	1-220-878-81	s	RES, CHIP 22 (1005)
R515	1-220-878-81	s	RES, CHIP 22 (1005)
R516	1-220-878-81	s	RES, CHIP 22 (1005)
R517	1-220-878-81	s	RES, CHIP 22 (1005)
R518	1-220-878-81	s	RES, CHIP 22 (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R520	1-220-878-81	s	RES, CHIP 22 (1005)
R521	1-208-887-81	s	RES, CHIP 1.0K (1005)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-208-911-81	s	RES, CHIP 10K (1005)
R524	1-220-878-81	s	RES, CHIP 22 (1005)
R525	1-220-878-81	s	RES, CHIP 22 (1005)
R526	1-220-878-81	s	RES, CHIP 22 (1005)
R527	1-220-878-81	s	RES, CHIP 22 (1005)
R528	1-220-878-81	s	RES, CHIP 22 (1005)
R529	1-220-878-81	s	RES, CHIP 22 (1005)
R530	1-220-878-81	s	RES, CHIP 22 (1005)
R531	1-220-878-81	s	RES, CHIP 22 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-220-878-81	s	RES, CHIP 22 (1005)
R538	1-220-878-81	s	RES, CHIP 22 (1005)
R539	1-220-878-81	s	RES, CHIP 22 (1005)
R540	1-208-911-81	s	RES, CHIP 10K (1005)
R541	1-208-887-81	s	RES, CHIP 1.0K (1005)
R542	1-220-878-81	s	RES, CHIP 22 (1005)
R543	1-220-878-81	s	RES, CHIP 22 (1005)
R544	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R545	1-220-878-81	s	RES, CHIP 22 (1005)
R546	1-220-878-81	s	RES, CHIP 22 (1005)
R547	1-220-878-81	s	RES, CHIP 22 (1005)
R548	1-220-878-81	s	RES, CHIP 22 (1005)
R549	1-220-878-81	s	RES, CHIP 22 (1005)
R550	1-220-878-81	s	RES, CHIP 22 (1005)
R551	1-220-878-81	s	RES, CHIP 22 (1005)
R552	1-220-878-81	s	RES, CHIP 22 (1005)
R553	1-220-878-81	s	RES, CHIP 22 (1005)
R554	1-220-878-81	s	RES, CHIP 22 (1005)
R555	1-220-878-81	s	RES, CHIP 22 (1005)
R556	1-220-878-81	s	RES, CHIP 22 (1005)
R557	1-220-878-81	s	RES, CHIP 22 (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R901	1-208-935-81	s	RES, CHIP 100K (1005)
R902	1-220-878-81	s	RES, CHIP 22 (1005)
R903	1-220-878-81	s	RES, CHIP 22 (1005)
R904	1-220-878-81	s	RES, CHIP 22 (1005)
R905	1-220-878-81	s	RES, CHIP 22 (1005)
R909	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R910	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R916	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R917	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R918	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R923	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R924	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R925	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R926	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R927	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R928	1-208-887-81	s	RES, CHIP 1.0K (1005)
R929	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1011	1-220-878-81	s	RES, CHIP 22 (1005)
R1101	1-220-878-81	s	RES, CHIP 22 (1005)
R1102	1-220-878-81	s	RES, CHIP 22 (1005)
R1103	1-220-878-81	s	RES, CHIP 22 (1005)
R1104	1-220-878-81	s	RES, CHIP 22 (1005)
R1105	1-220-878-81	s	RES, CHIP 22 (1005)
R1106	1-220-878-81	s	RES, CHIP 22 (1005)
R1107	1-220-878-81	s	RES, CHIP 22 (1005)
R1108	1-220-878-81	s	RES, CHIP 22 (1005)
R1109	1-208-935-81	s	RES, CHIP 100K (1005)
R1110	1-208-935-81	s	RES, CHIP 100K (1005)
R1111	1-208-935-81	s	RES, CHIP 100K (1005)
R1112	1-208-935-81	s	RES, CHIP 100K (1005)
R1113	1-208-935-81	s	RES, CHIP 100K (1005)
R1114	1-208-935-81	s	RES, CHIP 100K (1005)
R1115	1-208-935-81	s	RES, CHIP 100K (1005)
R1116	1-208-935-81	s	RES, CHIP 100K (1005)
R1118	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1119	1-208-871-81	s	RES, CHIP 220 (1005)
R1120	1-208-871-81	s	RES, CHIP 220 (1005)
R1121	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1122	1-208-871-81	s	RES, CHIP 220 (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1126	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1127	1-220-878-81	s	RES, CHIP 22 (1005)
R1128	1-220-878-81	s	RES, CHIP 22 (1005)
R1129	1-220-878-81	s	RES, CHIP 22 (1005)
R1130	1-220-878-81	s	RES, CHIP 22 (1005)
R1131	1-220-878-81	s	RES, CHIP 22 (1005)
R1132	1-220-878-81	s	RES, CHIP 22 (1005)
R1133	1-220-878-81	s	RES, CHIP 22 (1005)
R1134	1-220-878-81	s	RES, CHIP 22 (1005)
R1135	1-220-878-81	s	RES, CHIP 22 (1005)
R1136	1-220-878-81	s	RES, CHIP 22 (1005)
R1137	1-220-878-81	s	RES, CHIP 22 (1005)
R1138	1-220-878-81	s	RES, CHIP 22 (1005)
R1139	1-220-878-81	s	RES, CHIP 22 (1005)
R1140	1-220-878-81	s	RES, CHIP 22 (1005)
R1141	1-220-878-81	s	RES, CHIP 22 (1005)
R1142	1-220-878-81	s	RES, CHIP 22 (1005)
R1143	1-220-878-81	s	RES, CHIP 22 (1005)
R1144	1-208-911-81	s	RES, CHIP 10K (1005)
R1145	1-208-911-81	s	RES, CHIP 10K (1005)
R1146	1-208-911-81	s	RES, CHIP 10K (1005)
R1147	1-208-911-81	s	RES, CHIP 10K (1005)
R1148	1-208-911-81	s	RES, CHIP 10K (1005)
R1149	1-208-911-81	s	RES, CHIP 10K (1005)
R1150	1-208-911-81	s	RES, CHIP 10K (1005)
R1151	1-208-911-81	s	RES, CHIP 10K (1005)
R1152	1-208-911-81	s	RES, CHIP 10K (1005)
R1153	1-208-911-81	s	RES, CHIP 10K (1005)
R1154	1-208-911-81	s	RES, CHIP 10K (1005)
R1155	1-208-911-81	s	RES, CHIP 10K (1005)
R1156	1-208-911-81	s	RES, CHIP 10K (1005)
R1157	1-208-911-81	s	RES, CHIP 10K (1005)
R1162	1-208-911-81	s	RES, CHIP 10K (1005)
R1163	1-208-911-81	s	RES, CHIP 10K (1005)
R1164	1-208-911-81	s	RES, CHIP 10K (1005)
R1165	1-208-911-81	s	RES, CHIP 10K (1005)
R1166	1-208-935-81	s	RES, CHIP 100K (1005)
R1167	1-208-935-81	s	RES, CHIP 100K (1005)
R1168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1170	1-208-911-81	s	RES, CHIP 10K (1005)
R1172	1-208-911-81	s	RES, CHIP 10K (1005)
R1175	1-208-911-81	s	RES, CHIP 10K (1005)
R1177	1-208-911-81	s	RES, CHIP 10K (1005)
R1179	1-208-911-81	s	RES, CHIP 10K (1005)
R1181	1-208-911-81	s	RES, CHIP 10K (1005)
R1184	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1215	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1221	1-208-879-81	s	RES, CHIP 470 (1005)
R1222	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1223	1-208-887-81	s	RES, CHIP 1.0K (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1224	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-208-911-81	s	RES, CHIP 10K (1005)
R1230	1-208-911-81	s	RES, CHIP 10K (1005)
R1231	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-911-81	s	RES, CHIP 10K (1005)
R1302	1-208-911-81	s	RES, CHIP 10K (1005)
R1303	1-208-911-81	s	RES, CHIP 10K (1005)
R1304	1-208-911-81	s	RES, CHIP 10K (1005)
R1305	1-208-911-81	s	RES, CHIP 10K (1005)
R1307	1-208-911-81	s	RES, CHIP 10K (1005)
R1401	1-208-879-81	s	RES, CHIP 470 (1005)
R1402	1-208-911-81	s	RES, CHIP 10K (1005)
R1404	1-208-911-81	s	RES, CHIP 10K (1005)
R1407	1-208-911-81	s	RES, CHIP 10K (1005)
R1409	1-208-911-81	s	RES, CHIP 10K (1005)
R1410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1429	1-208-863-81	s	RES, CHIP 100 (1005)
R1430	1-208-863-81	s	RES, CHIP 100 (1005)
R1431	1-208-863-81	s	RES, CHIP 100 (1005)
R1432	1-208-863-81	s	RES, CHIP 100 (1005)
R1433	1-208-863-81	s	RES, CHIP 100 (1005)
R1434	1-208-863-81	s	RES, CHIP 100 (1005)
R1435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1439	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1501	1-208-911-81	s	RES, CHIP 10K (1005)
R1503	1-208-911-81	s	RES, CHIP 10K (1005)
R1504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1505	1-208-911-81	s	RES, CHIP 10K (1005)
R1506	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1507	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1509	1-208-911-81	s	RES, CHIP 10K (1005)
R1510	1-208-887-81	s	RES, CHIP 1.0K (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1511	1-208-911-81	s	RES, CHIP 10K (1005)
R1512	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1514	1-208-911-81	s	RES, CHIP 10K (1005)
R1516	1-208-911-81	s	RES, CHIP 10K (1005)
R1517	1-208-911-81	s	RES, CHIP 10K (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1524	1-208-863-81	s	RES, CHIP 100 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1531	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-208-863-81	s	RES, CHIP 100 (1005)
R1533	1-208-863-81	s	RES, CHIP 100 (1005)
R1534	1-208-863-81	s	RES, CHIP 100 (1005)
R1535	1-208-863-81	s	RES, CHIP 100 (1005)
R1539	1-208-863-81	s	RES, CHIP 100 (1005)
R1540	1-208-863-81	s	RES, CHIP 100 (1005)
R1601	1-208-911-81	s	RES, CHIP 10K (1005)
R1602	1-208-911-81	s	RES, CHIP 10K (1005)
R1603	1-208-911-81	s	RES, CHIP 10K (1005)
R1604	1-208-911-81	s	RES, CHIP 10K (1005)
R1605	1-208-911-81	s	RES, CHIP 10K (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1701	1-208-911-81	s	RES, CHIP 10K (1005)
R1702	1-208-911-81	s	RES, CHIP 10K (1005)
R2001	1-220-878-81	s	RES, CHIP 22 (1005)
R2002	1-220-878-81	s	RES, CHIP 22 (1005)
R2003	1-220-878-81	s	RES, CHIP 22 (1005)
R2004	1-220-878-81	s	RES, CHIP 22 (1005)
R2005	1-220-878-81	s	RES, CHIP 22 (1005)
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-208-855-81	s	RES, CHIP 47 (1005)
R2107	1-208-855-81	s	RES, CHIP 47 (1005)
R2108	1-208-855-81	s	RES, CHIP 47 (1005)
R2109	1-208-855-81	s	RES, CHIP 47 (1005)
R2110	1-220-878-81	s	RES, CHIP 22 (1005)
R2111	1-220-878-81	s	RES, CHIP 22 (1005)
R2114	1-208-911-81	s	RES, CHIP 10K (1005)
R2115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2118	1-208-911-81	s	RES, CHIP 10K (1005)
R2119	1-208-911-81	s	RES, CHIP 10K (1005)
R2120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2123	1-208-855-81	s	RES, CHIP 47 (1005)
R2124	1-208-855-81	s	RES, CHIP 47 (1005)
R2125	1-208-855-81	s	RES, CHIP 47 (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2126	1-208-855-81	s	RES, CHIP 47 (1005)
R2127	1-220-878-81	s	RES, CHIP 22 (1005)
R2128	1-208-855-81	s	RES, CHIP 47 (1005)
R2129	1-208-855-81	s	RES, CHIP 47 (1005)
R2130	1-208-855-81	s	RES, CHIP 47 (1005)
R2131	1-208-855-81	s	RES, CHIP 47 (1005)
R2132	1-208-855-81	s	RES, CHIP 47 (1005)
R2133	1-208-855-81	s	RES, CHIP 47 (1005)
R2134	1-208-855-81	s	RES, CHIP 47 (1005)
R2135	1-208-855-81	s	RES, CHIP 47 (1005)
R2136	1-220-878-81	s	RES, CHIP 22 (1005)
R2137	1-220-878-81	s	RES, CHIP 22 (1005)
R2140	1-208-911-81	s	RES, CHIP 10K (1005)
R2141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2144	1-208-911-81	s	RES, CHIP 10K (1005)
R2145	1-208-911-81	s	RES, CHIP 10K (1005)
R2146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2148	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2149	1-208-855-81	s	RES, CHIP 47 (1005)
R2150	1-208-855-81	s	RES, CHIP 47 (1005)
R2151	1-208-855-81	s	RES, CHIP 47 (1005)
R2152	1-208-855-81	s	RES, CHIP 47 (1005)
R2201	1-208-855-81	s	RES, CHIP 47 (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-855-81	s	RES, CHIP 47 (1005)
R2205	1-208-855-81	s	RES, CHIP 47 (1005)
R2206	1-208-855-81	s	RES, CHIP 47 (1005)
R2207	1-220-878-81	s	RES, CHIP 22 (1005)
R2208	1-220-878-81	s	RES, CHIP 22 (1005)
R2209	1-220-878-81	s	RES, CHIP 22 (1005)
R2210	1-220-878-81	s	RES, CHIP 22 (1005)
R2211	1-208-855-81	s	RES, CHIP 47 (1005)
R2212	1-208-855-81	s	RES, CHIP 47 (1005)
R2213	1-208-855-81	s	RES, CHIP 47 (1005)
R2214	1-208-855-81	s	RES, CHIP 47 (1005)
R2215	1-208-863-81	s	RES, CHIP 100 (1005)
R2216	1-208-863-81	s	RES, CHIP 100 (1005)
R2217	1-208-863-81	s	RES, CHIP 100 (1005)
R2218	1-208-863-81	s	RES, CHIP 100 (1005)
R2219	1-208-863-81	s	RES, CHIP 100 (1005)
R2220	1-208-863-81	s	RES, CHIP 100 (1005)
R2221	1-208-863-81	s	RES, CHIP 100 (1005)
R2222	1-208-863-81	s	RES, CHIP 100 (1005)
R2223	1-208-863-81	s	RES, CHIP 100 (1005)
R2224	1-208-863-81	s	RES, CHIP 100 (1005)
R2225	1-208-863-81	s	RES, CHIP 100 (1005)
R2226	1-208-863-81	s	RES, CHIP 100 (1005)
R2227	1-208-863-81	s	RES, CHIP 100 (1005)
R2228	1-208-863-81	s	RES, CHIP 100 (1005)
R2229	1-208-863-81	s	RES, CHIP 100 (1005)
R2230	1-208-863-81	s	RES, CHIP 100 (1005)
R2231	1-208-863-81	s	RES, CHIP 100 (1005)
R2232	1-208-863-81	s	RES, CHIP 100 (1005)
R2233	1-208-863-81	s	RES, CHIP 100 (1005)
R2234	1-208-863-81	s	RES, CHIP 100 (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2401	1-208-855-81	s	RES, CHIP 47 (1005)
R2402	1-208-855-81	s	RES, CHIP 47 (1005)
R2403	1-208-855-81	s	RES, CHIP 47 (1005)
R2404	1-208-855-81	s	RES, CHIP 47 (1005)
R2405	1-208-855-81	s	RES, CHIP 47 (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-220-878-81	s	RES, CHIP 22 (1005)
R2408	1-220-878-81	s	RES, CHIP 22 (1005)
R2409	1-220-878-81	s	RES, CHIP 22 (1005)
R2410	1-220-878-81	s	RES, CHIP 22 (1005)
R2411	1-208-855-81	s	RES, CHIP 47 (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-855-81	s	RES, CHIP 47 (1005)
R2414	1-208-855-81	s	RES, CHIP 47 (1005)
R2415	1-208-863-81	s	RES, CHIP 100 (1005)
R2416	1-208-863-81	s	RES, CHIP 100 (1005)
R2417	1-208-863-81	s	RES, CHIP 100 (1005)
R2418	1-208-863-81	s	RES, CHIP 100 (1005)
R2419	1-208-863-81	s	RES, CHIP 100 (1005)
R2420	1-208-863-81	s	RES, CHIP 100 (1005)
R2421	1-208-863-81	s	RES, CHIP 100 (1005)
R2422	1-208-863-81	s	RES, CHIP 100 (1005)
R2423	1-208-863-81	s	RES, CHIP 100 (1005)
R2424	1-208-863-81	s	RES, CHIP 100 (1005)
R2425	1-208-863-81	s	RES, CHIP 100 (1005)
R2426	1-208-863-81	s	RES, CHIP 100 (1005)
R2427	1-208-863-81	s	RES, CHIP 100 (1005)
R2428	1-208-863-81	s	RES, CHIP 100 (1005)
R2429	1-208-863-81	s	RES, CHIP 100 (1005)
R2430	1-208-863-81	s	RES, CHIP 100 (1005)
R2431	1-208-863-81	s	RES, CHIP 100 (1005)
R2432	1-208-863-81	s	RES, CHIP 100 (1005)
R2433	1-208-863-81	s	RES, CHIP 100 (1005)
R2434	1-208-863-81	s	RES, CHIP 100 (1005)
R2601	1-208-927-81	s	RES, CHIP 47K (1005)
R2602	1-208-927-81	s	RES, CHIP 47K (1005)
R2603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2604	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2605	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2606	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2607	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2608	1-208-715-11	s	RES, CHIP 22K (1005)
R2609	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2610	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2611	1-208-863-81	s	RES, CHIP 100 (1005)
R2612	1-208-863-81	s	RES, CHIP 100 (1005)
R2701	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2802	1-208-863-81	s	RES, CHIP 100 (1005)
R2803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2804	1-208-863-81	s	RES, CHIP 100 (1005)
R2805	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2806	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2807	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2808	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2901	1-208-911-81	s	RES, CHIP 10K (1005)
R2902	1-208-911-81	s	RES, CHIP 10K (1005)
R2903	1-208-855-81	s	RES, CHIP 47 (1005)
R2904	1-208-855-81	s	RES, CHIP 47 (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2905	1-208-855-81	s	RES, CHIP 47 (1005)
R2906	1-208-855-81	s	RES, CHIP 47 (1005)
R2907	1-208-855-81	s	RES, CHIP 47 (1005)
R2908	1-208-855-81	s	RES, CHIP 47 (1005)
R2909	1-208-855-81	s	RES, CHIP 47 (1005)
R2910	1-208-855-81	s	RES, CHIP 47 (1005)
R2911	1-208-855-81	s	RES, CHIP 47 (1005)
R2912	1-208-855-81	s	RES, CHIP 47 (1005)
R3901	1-208-927-81	s	RES, CHIP 47K (1005)
R3902	1-208-927-81	s	RES, CHIP 47K (1005)
R3903	1-208-927-81	s	RES, CHIP 47K (1005)
R3904	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3905	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3906	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3907	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3909	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3910	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3911	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3912	1-208-715-11	s	RES, CHIP 22K (1005)
R3913	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3914	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3915	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3916	1-208-863-81	s	RES, CHIP 100 (1005)
R3917	1-208-863-81	s	RES, CHIP 100 (1005)
R3918	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3920	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3921	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4001	1-208-927-81	s	RES, CHIP 47K (1005)
R4002	1-208-927-81	s	RES, CHIP 47K (1005)
R4003	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4004	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4005	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4006	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4007	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4008	1-208-715-11	s	RES, CHIP 22K (1005)
R4009	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4010	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4011	1-208-863-81	s	RES, CHIP 100 (1005)
R4012	1-208-863-81	s	RES, CHIP 100 (1005)
R4013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4016	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4101	1-208-927-81	s	RES, CHIP 47K (1005)
R4102	1-208-927-81	s	RES, CHIP 47K (1005)
R4103	1-208-927-81	s	RES, CHIP 47K (1005)
R4104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4106	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4108	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4109	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4111	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4112	1-208-715-11	s	RES, CHIP 22K (1005)
R4113	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4114	1-208-903-81	s	RES, CHIP 4.7K (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4115	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4116	1-208-863-81	s	RES, CHIP 100 (1005)
R4117	1-208-863-81	s	RES, CHIP 100 (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4201	1-208-927-81	s	RES, CHIP 47K (1005)
R4202	1-208-927-81	s	RES, CHIP 47K (1005)
R4203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4208	1-208-715-11	s	RES, CHIP 22K (1005)
R4209	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4211	1-208-863-81	s	RES, CHIP 100 (1005)
R4212	1-208-863-81	s	RES, CHIP 100 (1005)
R4213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4301	1-208-927-81	s	RES, CHIP 47K (1005)
R4302	1-208-927-81	s	RES, CHIP 47K (1005)
R4303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4305	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4306	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4307	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4308	1-208-715-11	s	RES, CHIP 22K (1005)
R4309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4311	1-208-863-81	s	RES, CHIP 100 (1005)
R4312	1-208-863-81	s	RES, CHIP 100 (1005)
R4313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4401	1-208-927-81	s	RES, CHIP 47K (1005)
R4402	1-208-927-81	s	RES, CHIP 47K (1005)
R4403	1-208-927-81	s	RES, CHIP 47K (1005)
R4404	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4405	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4406	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4407	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4408	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4409	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4410	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4412	1-208-715-11	s	RES, CHIP 22K (1005)
R4413	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4414	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4415	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4416	1-208-863-81	s	RES, CHIP 100 (1005)
R4417	1-208-863-81	s	RES, CHIP 100 (1005)
R4418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4420	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4501	1-208-927-81	s	RES, CHIP 47K (1005)
R4502	1-208-927-81	s	RES, CHIP 47K (1005)
RB701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB702	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB703	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB704	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB718	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB719	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB720	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB721	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB722	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB723	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB724	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB802	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB803	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB804	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB805	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB806	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB807	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB808	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB813	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB814	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB815	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB816	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB817	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB818	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB819	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB820	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB821	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB822	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB823	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB824	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB825	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB826	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB827	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB828	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB829	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB830	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB831	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB832	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB833	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB834	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB835	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB836	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1501	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1502	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1503	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1504	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1505	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1506	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1507	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2119	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2121	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2122	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2123	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2124	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2205	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2206	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2207	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2208	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2210	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2211	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2212	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2213	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2215	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(OUT-35A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2401	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2402	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2403	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2404	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2410	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2411	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2412	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2413	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2416	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2417	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2701	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2702	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2703	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2704	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2705	1-234-375-21	s	RES, NETWORK 1K (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP2601	1-535-877-22	s	CHIP, CHECKER
TP2602	1-535-877-22	s	CHIP, CHECKER
TP2701	1-535-877-22	s	CHIP, CHECKER
TP3901	1-535-877-22	s	CHIP, CHECKER
TP3902	1-535-877-22	s	CHIP, CHECKER
TP3903	1-535-877-22	s	CHIP, CHECKER
TP4001	1-535-877-22	s	CHIP, CHECKER
TP4002	1-535-877-22	s	CHIP, CHECKER
TP4101	1-535-877-22	s	CHIP, CHECKER
TP4102	1-535-877-22	s	CHIP, CHECKER
TP4103	1-535-877-22	s	CHIP, CHECKER
TP4201	1-535-877-22	s	CHIP, CHECKER
TP4202	1-535-877-22	s	CHIP, CHECKER
TP4301	1-535-877-22	s	CHIP, CHECKER
TP4302	1-535-877-22	s	CHIP, CHECKER
TP4401	1-535-877-22	s	CHIP, CHECKER
TP4402	1-535-877-22	s	CHIP, CHECKER
TP4403	1-535-877-22	s	CHIP, CHECKER
X501	1-813-488-11	s	OSCILLATOR, CRYSTAL
X502	1-795-983-11	s	OSCILLATOR, CRYSTAL

SG-272A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1780-672-A	s	MOUNTED CIRCUIT BOARD, SG-272A
C100	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C101	1-115-672-21	s	CAP, ELECT 10MF
C102	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C103	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C104	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C105	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C107	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C109	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C110	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C111	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C112	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C113	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C114	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C115	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C116	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C117	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C203	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C204	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C205	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C207	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C208	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C209	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C217	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C219	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C220	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C221	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C222	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C226	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C229	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C230	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C231	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C232	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C233	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C234	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C235	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C300	1-107-420-21	s	CAP, CHIP ELECT 47MF
C302	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C303	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C304	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C305	1-135-347-21	s	CAP, ELECT 82MF (8X7)
C306	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C307	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C309	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C311	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C312	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C313	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C315	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C316	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C317	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C318	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C319	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C320	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C321	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C322	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(SG-272A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C323	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C324	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C325	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C326	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C327	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C328	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C329	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C330	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C331	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C332	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C333	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C334	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
CN1	1-815-903-11	s	CONNECTOR, BOARD TO BOARD 40P
CN2	1-815-903-11	s	CONNECTOR, BOARD TO BOARD 40P
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-064-52	s	DIODE CL-191YG-CD-T
D101	8-719-064-52	s	DIODE CL-191YG-CD-T
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D200	8-719-064-52	s	DIODE CL-191YG-CD-T
D300	8-719-024-81	s	DIODE 1SS300-TE85L
D301	8-719-048-17	s	DIODE MBRS130LT3
D302	8-719-024-81	s	DIODE 1SS300-TE85L
D303	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
F300	⚠ 1-533-998-21	s	FUSE, (SMD) (1A/125V)
IC100	6-700-661-01	s	IC MAX4615CUD+TG068
IC101	8-759-388-63	s	IC NJU7064V(TE2)
IC103	8-759-687-14	s	IC MAX4451EKA+TG069
IC106	6-704-406-01	s	IC LM1881MX NOPB
IC113	6-700-639-01	s	IC EP20K100ETC144-2-N
IC115	6-700-649-01	s	IC LT1720CMS8#TR
IC201	8-759-388-63	s	IC NJU7064V(TE2)
IC207	8-759-389-33	s	IC 74LCX244MTCX
IC208	8-759-386-26	s	IC 74LCX574MTCX
IC300	8-759-714-00	s	IC LT1576CS8#TR
IC303	8-759-460-72	s	IC BA033FP-E2
IC305	6-710-018-01	s	IC CAT24C02WI-GT3
IC306	6-701-068-01	s	IC SI-3018LSA-TL
L101	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L102	1-414-521-41	s	INDUCTOR, SMALL TYPE 10.0UH
L103	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L206	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L300	1-469-530-21	s	INDUCTOR, (SMD) 47UH
Q100	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q201	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q202	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
Q203	8-729-230-27	s	TRANSISTOR 2SA1213Y-TE12L
R100	1-211-969-91	s	RES, CHIP 10 (1608)
R101	1-218-871-91	s	RES, CHIP 10K (1608)
R102	1-211-969-91	s	RES, CHIP 10 (1608)
R103	1-211-990-91	s	RES, CHIP 75 (1608)
R104	1-211-990-91	s	RES, CHIP 75 (1608)
R105	1-211-990-91	s	RES, CHIP 75 (1608)
R106	1-211-990-91	s	RES, CHIP 75 (1608)
R111	1-211-990-91	s	RES, CHIP 75 (1608)

(SG-272A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R112	1-218-871-91	s	RES, CHIP 10K (1608)
R113	1-218-864-91	s	RES, CHIP 5.1K (1608)
R114	1-211-969-91	s	RES, CHIP 10 (1608)
R115	1-211-969-91	s	RES, CHIP 10 (1608)
R116	1-211-969-91	s	RES, CHIP 10 (1608)
R117	1-211-969-91	s	RES, CHIP 10 (1608)
R119	1-218-843-91	s	RES, CHIP 680 (1608)
R120	1-218-843-91	s	RES, CHIP 680 (1608)
R121	1-211-969-91	s	RES, CHIP 10 (1608)
R123	1-218-841-91	s	RES, CHIP 560 (1608)
R124	1-218-841-91	s	RES, CHIP 560 (1608)
R125	1-218-841-91	s	RES, CHIP 560 (1608)
R126	1-218-841-91	s	RES, CHIP 560 (1608)
R127	1-218-871-91	s	RES, CHIP 10K (1608)
R128	1-218-873-91	s	RES, CHIP 12K (1608)
R129	1-218-895-91	s	RES, CHIP 100K (1608)
R130	1-218-895-91	s	RES, CHIP 100K (1608)
R131	1-218-827-91	s	RES, CHIP 150 (1608)
R132	1-218-847-91	s	RES, CHIP 1.0K (1608)
R133	1-211-969-91	s	RES, CHIP 10 (1608)
R134	1-211-969-91	s	RES, CHIP 10 (1608)
R200	1-211-969-91	s	RES, CHIP 10 (1608)
R202	1-211-969-91	s	RES, CHIP 10 (1608)
R203	1-211-969-91	s	RES, CHIP 10 (1608)
R204	1-211-969-91	s	RES, CHIP 10 (1608)
R205	1-211-969-91	s	RES, CHIP 10 (1608)
R206	1-218-847-91	s	RES, CHIP 1.0K (1608)
R207	1-218-847-91	s	RES, CHIP 1.0K (1608)
R208	1-218-847-91	s	RES, CHIP 1.0K (1608)
R209	1-218-847-91	s	RES, CHIP 1.0K (1608)
R210	1-218-847-91	s	RES, CHIP 1.0K (1608)
R211	1-218-847-91	s	RES, CHIP 1.0K (1608)
R213	1-218-891-91	s	RES, CHIP 68K (1608)
R214	1-218-891-91	s	RES, CHIP 68K (1608)
R215	1-218-871-91	s	RES, CHIP 10K (1608)
R223	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R224	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R225	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R229	1-211-969-91	s	RES, CHIP 10 (1608)
R230	1-211-969-91	s	RES, CHIP 10 (1608)
R231	1-211-969-91	s	RES, CHIP 10 (1608)
R233	1-211-969-91	s	RES, CHIP 10 (1608)
R234	1-211-969-91	s	RES, CHIP 10 (1608)
R235	1-211-969-91	s	RES, CHIP 10 (1608)
R238	1-211-969-91	s	RES, CHIP 10 (1608)
R239	1-218-843-91	s	RES, CHIP 680 (1608)
R240	1-218-871-91	s	RES, CHIP 10K (1608)
R243	1-218-871-91	s	RES, CHIP 10K (1608)
R244	1-218-847-91	s	RES, CHIP 1.0K (1608)
R245	1-218-847-91	s	RES, CHIP 1.0K (1608)
R246	1-218-847-91	s	RES, CHIP 1.0K (1608)
R300	1-218-847-91	s	RES, CHIP 1.0K (1608)
R301	1-218-878-91	s	RES, CHIP 20K (1608)
R302	1-218-871-91	s	RES, CHIP 10K (1608)
R303	1-218-847-91	s	RES, CHIP 1.0K (1608)
R304	1-218-876-91	s	RES, CHIP 16K (1608)
R305	1-218-864-91	s	RES, CHIP 5.1K (1608)
R307	1-218-847-91	s	RES, CHIP 1.0K (1608)
R308	1-211-969-91	s	RES, CHIP 10 (1608)

(SG-272A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R309	1-211-969-91	s	RES, CHIP 10 (1608)
R312	1-218-857-91	s	RES, CHIP 2.7K (1608)
RB200	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB201	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB202	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB300	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB302	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
X200	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X201	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X202	1-813-285-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

SIO-26A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
C100	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C102	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C104	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C105	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C400	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C401	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C403	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C404	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C405	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C406	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C407	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C408	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C424	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C425	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C426	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C500	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C501	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C502	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C503	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C504	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C505	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C506	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C507	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C510	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C512	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C514	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C516	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN400	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN500	1-564-013-11	o	PIN, CONNECTOR 3P
CN501	1-564-013-11	o	PIN, CONNECTOR 3P
D200	8-719-064-52	s	DIODE CL-191YG-CD-T
D201	8-719-064-52	s	DIODE CL-191YG-CD-T
D202	8-719-064-52	s	DIODE CL-191YG-CD-T
E402	1-535-877-22	s	CHIP, CHECKER
E403	1-535-877-22	s	CHIP, CHECKER
E404	1-535-877-22	s	CHIP, CHECKER
IC100	8-759-549-15	s	IC SN74LV245APWR
IC101	8-759-549-15	s	IC SN74LV245APWR
IC102	8-759-549-15	s	IC SN74LV245APWR
IC103	8-759-549-15	s	IC SN74LV245APWR
IC401	6-700-655-01	s	IC LT1963ES8#TR

(SIO-26A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC410	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC411	8-759-679-55	s	IC SN74LVC08APWR
IC500	6-701-874-01	s	IC IDT71V016SA15PHG-TL
IC501	6-701-874-01	s	IC IDT71V016SA15PHG-TL
IC502	8-759-524-77	s	IC RN5VD21AA-TL-FA
IC503	8-759-450-42	s	IC MAX3222CAP+TG068
IC505	6-714-452-01	s	IC M29W800DT70N6E
R102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R200	1-216-833-91	s	RES, CHIP 10K (1608)
R201	1-216-833-91	s	RES, CHIP 10K (1608)
R202	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R203	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R300	1-216-833-91	s	RES, CHIP 10K (1608)
R301	1-216-833-91	s	RES, CHIP 10K (1608)
R302	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R400	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R401	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R402	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R403	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R404	1-218-833-91	s	RES, CHIP 270 (1608)
R405	1-218-855-91	s	RES, CHIP 2.2K (1608)
R406	1-218-855-91	s	RES, CHIP 2.2K (1608)
R415	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R416	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R417	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R418	1-216-833-91	s	RES, CHIP 10K (1608)
R419	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R420	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R421	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R422	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R500	1-218-871-91	s	RES, CHIP 10K (1608)
R501	1-216-833-91	s	RES, CHIP 10K (1608)
R503	1-216-833-91	s	RES, CHIP 10K (1608)
RB100	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB101	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB102	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB103	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB104	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB105	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB106	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB200	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB400	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB401	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
RB402	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB500	1-236-908-11	s	RES, CHIP NETWORK 10K (3216)
S300	1-692-270-41	s	SWITCH, SLIDE
S500	1-572-595-21	s	SWITCH, TACTILE (REFLOW TYPE)
TP100	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X400	1-795-176-21	s	OSCILLATOR, CRYSTAL

XPT-31/31A BOARD (SUFFIX 13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1718-302-A	s	MOUNTED CIRCUIT BOARD, XPT-31
1pc	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
8pcs	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
1pc	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs	4-812-134-11	s	RIVET (DIA. 3.5), NYLON
1pc	7-626-320-61	s	PIN, SPRING 3X18
4pcs	7-682-549-09	s	SCREW +B 3X10
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-682-A	s	ASSY, 7SEG
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C211	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C212	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C213	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C215	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C301	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C302	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C303	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C304	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C305	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C306	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C307	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C308	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C309	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C315	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C316	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C317	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C318	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C319	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C320	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C321	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C322	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C323	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C324	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C325	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C326	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C327	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C328	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C404	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C405	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C406	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C513	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C701	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1310	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1311	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1312	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1313	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1314	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1315	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1316	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1333	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C1338	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1339	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1340	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1353	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1359	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1360	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1361	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1362	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1701	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1702	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1703	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1704	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

Ref. No. or Q'ty	Part No.	SP	Description
C1709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1727	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1728	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1735	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1737	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1738	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1741	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1742	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1743	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1744	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1745	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1747	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1748	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1749	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1752	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1757	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1760	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1761	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1763	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1765	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1766	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1768	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1769	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1770	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1771	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1772	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1773	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1774	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1777	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1778	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1779	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1780	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1781	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1782	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1783	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1784	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1785	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1786	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1787	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1788	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1789	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1790	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1791	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1792	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1793	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1794	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1795	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1796	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1797	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1798	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1799	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1817	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1819	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1835	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1837	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1839	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1840	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1841	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1843	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1845	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1846	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1847	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1848	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1849	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1850	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1851	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1852	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1853	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1854	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1855	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1856	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1857	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1858	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1859	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1860	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1861	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1862	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1863	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1864	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1865	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1866	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1867	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1868	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1869	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1870	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1871	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1872	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1873	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1874	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1875	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1876	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1877	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1878	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1879	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1880	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1881	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1882	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1883	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1884	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1885	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1886	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1887	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1888	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1889	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1890	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1891	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1892	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1893	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1894	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1895	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1896	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1897	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1898	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1899	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1900	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1932	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1934	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
CN703	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN704	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN1201	1-770-627-21	s	PIN, CONNECTOR 10P
CN1301	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	8-719-069-28	s	DI 1SS400FJTE61
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D1101	6-502-598-01	s	DI SML-D12U8WT86
D1102	6-502-352-01	s	DI SML-522MU8WT86PQ
D1103	6-501-436-01	s	DIODE SML412BC6TT86
D1104	6-502-352-01	s	DI SML-522MU8WT86PQ
D1107	6-502-197-01	s	DI SML-D12M8WT86SM
D1108	6-502-197-01	s	DI SML-D12M8WT86SM
D1109	6-502-197-01	s	DI SML-D12M8WT86SM
D1110	6-502-197-01	s	DI SML-D12M8WT86SM
D1111	6-502-197-01	s	DI SML-D12M8WT86SM
D1112	6-502-197-01	s	DI SML-D12M8WT86SM
D1113	6-502-197-01	s	DI SML-D12M8WT86SM
D1114	6-502-197-01	s	DI SML-D12M8WT86SM
D1115	6-502-197-01	s	DI SML-D12M8WT86SM
D1116	6-502-197-01	s	DI SML-D12M8WT86SM
D1117	6-502-197-01	s	DI SML-D12M8WT86SM
D1118	6-502-197-01	s	DI SML-D12M8WT86SM
D1119	6-502-197-01	s	DI SML-D12M8WT86SM
D1120	6-502-197-01	s	DI SML-D12M8WT86SM
D1121	6-502-197-01	s	DI SML-D12M8WT86SM
D1122	6-502-197-01	s	DI SML-D12M8WT86SM
D1301	6-502-197-01	s	DI SML-D12M8WT86SM
D1302	6-502-197-01	s	DI SML-D12M8WT86SM
DD201	1-487-092-11	s	DC-DC CONVERTER
E201	1-535-877-22	s	CHIP, CHECKER

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
E202	1-535-877-22	s	CHIP, CHECKER
E203	1-535-877-22	s	CHIP, CHECKER
E204	1-535-877-22	s	CHIP, CHECKER
E205	1-535-877-22	s	CHIP, CHECKER
E206	1-535-877-22	s	CHIP, CHECKER
E207	1-535-877-22	s	CHIP, CHECKER
E208	1-535-877-22	s	CHIP, CHECKER
E209	1-535-877-22	s	CHIP, CHECKER
E210	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F201	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F301	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
F302	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
F303	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	6-700-655-01	s	IC LT1963ES8#TR
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC402	8-759-338-95	s	IC NJM2903V(TE2)
IC501	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC502	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC503	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC504	6-712-872-01	s	IC SN65LVDS31PWR
IC505	6-712-872-01	s	IC SN65LVDS31PWR
IC506	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC507	6-708-324-01	s	IC R3112N301A-TR-FA
IC508	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC509	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC510	6-710-018-01	s	IC CAT24C02WI-GT3
IC511	6-714-192-01	s	IC ADT75BRMZ-REEL
IC602	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-705-514-01	s	IC MAX3222IPWR
IC801	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC802	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC901	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC902	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1101	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC1103	8-759-598-44	s	IC TC7WH08FK(TE85R)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-218-985-11	s	RES, CHIP 470K (1005)
R202	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-895-81	s	RES, CHIP 2.2K (1005)
R213	1-208-895-81	s	RES, CHIP 2.2K (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-911-81	s	RES, CHIP 10K (1005)
R227	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-911-81	s	RES, CHIP 10K (1005)
R302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-895-81	s	RES, CHIP 2.2K (1005)
R305	1-208-911-81	s	RES, CHIP 10K (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-927-81	s	RES, CHIP 47K (1005)
R309	1-208-935-81	s	RES, CHIP 100K (1005)
R310	1-208-935-81	s	RES, CHIP 100K (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R313	1-208-935-81	s	RES, CHIP 100K (1005)
R314	1-208-911-81	s	RES, CHIP 10K (1005)
R315	1-208-927-81	s	RES, CHIP 47K (1005)
R316	1-208-927-81	s	RES, CHIP 47K (1005)
R318	1-208-911-81	s	RES, CHIP 10K (1005)
R319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-935-81	s	RES, CHIP 100K (1005)
R326	1-208-935-81	s	RES, CHIP 100K (1005)
R327	1-208-935-81	s	RES, CHIP 100K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-911-81	s	RES, CHIP 10K (1005)
R403	1-208-895-81	s	RES, CHIP 2.2K (1005)
R404	1-208-895-81	s	RES, CHIP 2.2K (1005)
R405	1-208-887-81	s	RES, CHIP 1.0K (1005)
R406	1-208-895-81	s	RES, CHIP 2.2K (1005)
R407	1-218-985-11	s	RES, CHIP 470K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-715-11	s	RES, CHIP 22K (1005)
R413	1-208-911-81	s	RES, CHIP 10K (1005)
R414	1-208-935-81	s	RES, CHIP 100K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-903-81	s	RES, CHIP 4.7K (1005)
R417	1-208-895-81	s	RES, CHIP 2.2K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-871-81	s	RES, CHIP 220 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R505	1-208-871-81	s	RES, CHIP 220 (1005)
R506	1-208-871-81	s	RES, CHIP 220 (1005)
R507	1-208-903-81	s	RES, CHIP 4.7K (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-220-878-81	s	RES, CHIP 22 (1005)
R511	1-220-878-81	s	RES, CHIP 22 (1005)
R512	1-220-878-81	s	RES, CHIP 22 (1005)
R513	1-220-878-81	s	RES, CHIP 22 (1005)
R514	1-220-878-81	s	RES, CHIP 22 (1005)
R515	1-208-935-81	s	RES, CHIP 100K (1005)
R516	1-208-935-81	s	RES, CHIP 100K (1005)
R517	1-208-935-81	s	RES, CHIP 100K (1005)
R601	1-208-935-81	s	RES, CHIP 100K (1005)
R602	1-208-887-81	s	RES, CHIP 1.0K (1005)
R603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R604	1-220-878-81	s	RES, CHIP 22 (1005)
R605	1-220-878-81	s	RES, CHIP 22 (1005)
R606	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-220-878-81	s	RES, CHIP 22 (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-208-935-81	s	RES, CHIP 100K (1005)
R616	1-208-935-81	s	RES, CHIP 100K (1005)
R617	1-208-935-81	s	RES, CHIP 100K (1005)
R1001	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1101	1-208-911-81	s	RES, CHIP 10K (1005)
R1103	1-208-911-81	s	RES, CHIP 10K (1005)
R1105	1-208-911-81	s	RES, CHIP 10K (1005)
R1108	1-220-878-81	s	RES, CHIP 22 (1005)
R1109	1-208-911-81	s	RES, CHIP 10K (1005)
R1111	1-220-878-81	s	RES, CHIP 22 (1005)
R1112	1-220-878-81	s	RES, CHIP 22 (1005)
R1117	1-220-878-81	s	RES, CHIP 22 (1005)
R1118	1-220-878-81	s	RES, CHIP 22 (1005)
R1119	1-220-878-81	s	RES, CHIP 22 (1005)
R1121	1-208-911-81	s	RES, CHIP 10K (1005)
R1122	1-208-911-81	s	RES, CHIP 10K (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1126	1-208-871-81	s	RES, CHIP 220 (1005)
R1127	1-208-871-81	s	RES, CHIP 220 (1005)
R1128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1129	1-208-871-81	s	RES, CHIP 220 (1005)
R1130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1133	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1134	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1208	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1218	1-220-878-81	s	RES, CHIP 22 (1005)
R1219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1317	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1318	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1319	1-208-860-81	s	RES, CHIP 75 (1005)
R1320	1-208-860-81	s	RES, CHIP 75 (1005)
R1321	1-208-860-81	s	RES, CHIP 75 (1005)
R1322	1-208-860-81	s	RES, CHIP 75 (1005)
R1323	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1324	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1401	1-220-878-81	s	RES, CHIP 22 (1005)
R1402	1-220-878-81	s	RES, CHIP 22 (1005)
R1403	1-220-878-81	s	RES, CHIP 22 (1005)
R1404	1-220-878-81	s	RES, CHIP 22 (1005)
R1405	1-220-878-81	s	RES, CHIP 22 (1005)
R1406	1-220-878-81	s	RES, CHIP 22 (1005)
R1407	1-220-878-81	s	RES, CHIP 22 (1005)
R1408	1-220-878-81	s	RES, CHIP 22 (1005)
R1409	1-220-878-81	s	RES, CHIP 22 (1005)
R1410	1-220-878-81	s	RES, CHIP 22 (1005)
R1411	1-220-878-81	s	RES, CHIP 22 (1005)
R1412	1-220-878-81	s	RES, CHIP 22 (1005)
R1413	1-220-878-81	s	RES, CHIP 22 (1005)
R1417	1-220-878-81	s	RES, CHIP 22 (1005)
R1418	1-220-878-81	s	RES, CHIP 22 (1005)
R1419	1-220-878-81	s	RES, CHIP 22 (1005)
R1426	1-208-911-81	s	RES, CHIP 10K (1005)
R1428	1-220-878-81	s	RES, CHIP 22 (1005)
R1429	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1430	1-220-878-81	s	RES, CHIP 22 (1005)
R1432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1434	1-220-878-81	s	RES, CHIP 22 (1005)
R1436	1-220-878-81	s	RES, CHIP 22 (1005)
R1439	1-220-878-81	s	RES, CHIP 22 (1005)
R1440	1-220-878-81	s	RES, CHIP 22 (1005)
R1441	1-208-911-81	s	RES, CHIP 10K (1005)
R1442	1-208-911-81	s	RES, CHIP 10K (1005)
R1443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1447	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1449	1-208-911-81	s	RES, CHIP 10K (1005)
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB613	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB614	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB615	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB706	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB707	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB708	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB709	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB718	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB719	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB720	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB721	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB722	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB723	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB724	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB725	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB726	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB801	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB802	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB803	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB804	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB805	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB806	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB807	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB808	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB903	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB904	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB905	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1101	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1104	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(XPT-31/31A BOARD (SUFFIX 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB1105	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1107	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1108	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1109	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1110	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1111	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1402	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
S701	1-771-721-21	s	SWITCH, TACTILE
S1102	1-771-721-21	s	SWITCH, TACTILE
T1301	1-445-895-11	s	TRANSFORMER, PULSE
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X1101	1-813-488-11	s	OSCILLATOR, CRYSTAL

XPT-31/31A BOARD (SUFFIX 14)
---

*a: For XPT-31
*b: For XPT-31A

Ref. No. or Q'ty		Part No.	SP	Description
1pc	*a	A-1718-302-A	s	MOUNTED CIRCUIT BOARD, XPT-31
1pc	*a	1-857-571-12	s	PC BOARD, MOUNT(CPU-DP MODULE)
1pc	*b	3-531-576-51	o	RIVET
8pcs		3-942-866-02	s	NUT (M3) (3X0.5), NYLON
1pc		4-183-378-01	s	PC BOARD GUARD FL
1pc		4-183-379-01	s	PC BOARD GUARD FR
1pc	*b	4-183-612-01	s	SHEET, WIND SHIELDING
1pc	*a	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc		4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
4pcs		4-812-134-11	s	RIVET (DIA. 3.5), NYLON
2pcs	*a	6-714-073-01	s	IC 88E1118R-A0-NNC2C000
1pc		7-626-320-61	s	PIN, SPRING 3X18
4pcs	*a	7-682-549-09	s	SCREW +B 3X10
6pcs		7-682-947-01	s	SCREW +PSW 3X6
2pcs		7-682-951-01	s	SCREW +PSW 3X14
1pc		A-1771-682-A	s	ASSY, 7SEG
1pc		A-1771-683-A	s	ASSY, PBS
2pcs		A-1771-684-A	s	BOARD LEVER F ASSY
C201		1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202		1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209		1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C211		1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C212		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C213		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C214		1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C215		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C216		1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C222		1-116-486-21	s	CAP, CHIP CERAMIC 47MF B 3225
C223		1-116-486-21	s	CAP, CHIP CERAMIC 47MF B 3225
C224		1-116-486-21	s	CAP, CHIP CERAMIC 47MF B 3225
C225		1-116-486-21	s	CAP, CHIP CERAMIC 47MF B 3225
C226		1-116-486-21	s	CAP, CHIP CERAMIC 47MF B 3225
C227		1-116-486-21	s	CAP, CHIP CERAMIC 47MF B 3225
C228		1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C229		1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C230		1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C319		1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C320		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C321		1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C323		1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C324		1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C325		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C326		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C327		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C328		1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C401		1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C402		1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C404		1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C405		1-114-415-21	s	CAP, ELECT 100MF (5X5.9)

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C406	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C501	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C503	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C511	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C512	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C513	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C515	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C517	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C518	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C701	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C702	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C707	1-114-415-21	s	CAP, ELECT 100MF (5X5.9)
C801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C807	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C901	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C905	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C907	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C908	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1001	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1002	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1101	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1102	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1103	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1104	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1105	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1106	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1113	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1309	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1310	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1311	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1312	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1313	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1314	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1315	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1316	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1317	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1320	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1321	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1322	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1324	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1333	1-135-787-91	s	CAP, CHIP CERAMIC 1000PF
C1338	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1339	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1340	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1341	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1343	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1345	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1347	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1349	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1351	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1353	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1354	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1356	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1358	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1359	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1360	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1361	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1362	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1701	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1702	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1703	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1704	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1705	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1706	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1707	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1708	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1709	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1710	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1711	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1712	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1713	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1714	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1715	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1716	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1717	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1718	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1719	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1720	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1721	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1722	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1723	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1724	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1725	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1726	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1727	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1728	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1729	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1730	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1731	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1732	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1733	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1734	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1735	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1736	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1737	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1738	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1739	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1740	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1741	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1742	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1743	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1744	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1745	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1746	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1747	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1748	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1749	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1750	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1751	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1752	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1753	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1754	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1755	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1756	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1757	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1758	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1759	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1760	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1761	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1762	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1763	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1764	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1765	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1766	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1767	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1768	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1769	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1770	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

Ref. No. or Q'ty	Part No.	SP	Description
C1771	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1772	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1773	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1774	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1775	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1776	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1777	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1778	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1779	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1780	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1781	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1782	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1783	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1784	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1785	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1786	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1787	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1788	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1789	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1790	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1791	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1792	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1793	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1794	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1795	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1796	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1797	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1798	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1799	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1800	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1801	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1802	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1803	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1804	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1805	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1806	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1807	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1808	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1809	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1810	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1811	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1812	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1813	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1814	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1815	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1816	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1817	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1818	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1819	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1820	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1821	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1822	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1823	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1824	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1825	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1826	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1827	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1828	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1829	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1830	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1831	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1832	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1833	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1834	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1835	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1836	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1837	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1838	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1839	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1840	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1841	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1842	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1843	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1844	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1845	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1846	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1847	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1848	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1849	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1850	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1851	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1852	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1853	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1854	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1855	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1856	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1857	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1858	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1859	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1860	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1861	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1862	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1863	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1864	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1865	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1866	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1867	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1868	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1869	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1870	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1871	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1872	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1873	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1874	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1875	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1876	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1877	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1878	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1879	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1880	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1881	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1882	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1883	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1884	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1885	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1886	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1887	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1888	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
C1889	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1890	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1891	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1892	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1893	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1894	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1895	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1896	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1897	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1898	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1899	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1900	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1901	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1902	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1903	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1904	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1905	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1906	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1932	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1934	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C1935	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C1936	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C1937	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1938	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1939	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1940	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1941	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1942	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1943	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1944	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1945	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C1946	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C1947	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1948	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1949	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1950	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1951	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1952	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1953	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1954	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
CN703	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
CN704	1-794-509-21	s	PIN, CONNECTOR (PC BOARD) (3P)
CN1201	1-770-627-21	s	PIN, CONNECTOR 10P
CN1301	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-197-01	s	DI SML-D12M8WT86SM
D402	8-719-069-28	s	DI 1SS400FJTE61
D403	6-502-197-01	s	DI SML-D12M8WT86SM
D1101	6-502-598-01	s	DI SML-D12U8WT86
D1102	6-502-352-01	s	DI SML-522MU8WT86PQ
D1103	6-501-436-01	s	DIODE SML412BC6TT86
D1104	6-502-352-01	s	DI SML-522MU8WT86PQ
D1107	6-502-197-01	s	DI SML-D12M8WT86SM
D1108	6-502-197-01	s	DI SML-D12M8WT86SM
D1109	6-502-197-01	s	DI SML-D12M8WT86SM
D1110	6-502-197-01	s	DI SML-D12M8WT86SM
D1111	6-502-197-01	s	DI SML-D12M8WT86SM

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
D1112	6-502-197-01	s	DI SML-D12M8WT86SM
D1113	6-502-197-01	s	DI SML-D12M8WT86SM
D1114	6-502-197-01	s	DI SML-D12M8WT86SM
D1115	6-502-197-01	s	DI SML-D12M8WT86SM
D1116	6-502-197-01	s	DI SML-D12M8WT86SM
D1117	6-502-197-01	s	DI SML-D12M8WT86SM
D1118	6-502-197-01	s	DI SML-D12M8WT86SM
D1119	6-502-197-01	s	DI SML-D12M8WT86SM
D1120	6-502-197-01	s	DI SML-D12M8WT86SM
D1121	6-502-197-01	s	DI SML-D12M8WT86SM
D1122	6-502-197-01	s	DI SML-D12M8WT86SM
D1301	6-502-197-01	s	DI SML-D12M8WT86SM
D1302	6-502-197-01	s	DI SML-D12M8WT86SM
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-489-686-11	s	DC-DC CONVERTER
E201	1-535-877-22	s	CHIP, CHECKER
E202	1-535-877-22	s	CHIP, CHECKER
E203	1-535-877-22	s	CHIP, CHECKER
E204	1-535-877-22	s	CHIP, CHECKER
E205	1-535-877-22	s	CHIP, CHECKER
E206	1-535-877-22	s	CHIP, CHECKER
E207	1-535-877-22	s	CHIP, CHECKER
E208	1-535-877-22	s	CHIP, CHECKER
E209	1-535-877-22	s	CHIP, CHECKER
E210	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F201	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F202	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
F303	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC201	6-700-655-01	s	IC LT1963ES8#TR
IC402	8-759-338-95	s	IC NJM2903V(TE2)
IC501	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC502	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC503	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC504	6-712-872-01	s	IC SN65LVDS31PWR
IC505	6-712-872-01	s	IC SN65LVDS31PWR
IC506	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC507	6-708-324-01	s	IC R3112N301A-TR-FA
IC508	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC509	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC510	6-710-018-01	s	IC CAT24C02WI-GT3
IC511	6-714-192-01	s	IC ADT75BRMZ-REEL
IC602	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-705-514-01	s	IC MAX3222IPWR
IC801	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC802	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC901	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC902	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC1101	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC1103	8-759-598-44	s	IC TC7WH08FK

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-208-951-81	s	RES, CHIP 470K (1005)
R202	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-895-81	s	RES, CHIP 2.2K (1005)
R213	1-208-895-81	s	RES, CHIP 2.2K (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R216	1-208-927-81	s	RES, CHIP 47K (1005)
R217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R218	1-208-911-81	s	RES, CHIP 10K (1005)
R227	1-208-911-81	s	RES, CHIP 10K (1005)
R228	1-208-927-81	s	RES, CHIP 47K (1005)
R229	1-208-919-81	s	RES, CHIP 22K (1005)
R230	1-208-919-81	s	RES, CHIP 22K (1005)
R232	1-208-879-81	s	RES, CHIP 470 (1005)
R233	1-208-927-81	s	RES, CHIP 47K (1005)
R234	1-208-927-81	s	RES, CHIP 47K (1005)
R235	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-208-911-81	s	RES, CHIP 10K (1005)
R315	1-208-927-81	s	RES, CHIP 47K (1005)
R316	1-208-927-81	s	RES, CHIP 47K (1005)
R325	1-208-935-81	s	RES, CHIP 100K (1005)
R326	1-208-935-81	s	RES, CHIP 100K (1005)
R327	1-208-935-81	s	RES, CHIP 100K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-911-81	s	RES, CHIP 10K (1005)
R403	1-208-895-81	s	RES, CHIP 2.2K (1005)
R404	1-208-895-81	s	RES, CHIP 2.2K (1005)
R405	1-208-887-81	s	RES, CHIP 1.0K (1005)
R406	1-208-895-81	s	RES, CHIP 2.2K (1005)
R407	1-208-951-81	s	RES, CHIP 470K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R409	1-208-911-81	s	RES, CHIP 10K (1005)
R410	1-208-903-81	s	RES, CHIP 4.7K (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-919-81	s	RES, CHIP 22K (1005)
R413	1-208-911-81	s	RES, CHIP 10K (1005)

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R414	1-208-935-81	s	RES, CHIP 100K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-903-81	s	RES, CHIP 4.7K (1005)
R417	1-208-895-81	s	RES, CHIP 2.2K (1005)
R418	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-871-81	s	RES, CHIP 220 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-871-81	s	RES, CHIP 220 (1005)
R506	1-208-871-81	s	RES, CHIP 220 (1005)
R507	1-208-903-81	s	RES, CHIP 4.7K (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-220-878-81	s	RES, CHIP 22 (1005)
R511	1-220-878-81	s	RES, CHIP 22 (1005)
R512	1-220-878-81	s	RES, CHIP 22 (1005)
R513	1-220-878-81	s	RES, CHIP 22 (1005)
R514	1-220-878-81	s	RES, CHIP 22 (1005)
R515	1-208-935-81	s	RES, CHIP 100K (1005)
R516	1-208-935-81	s	RES, CHIP 100K (1005)
R517	1-208-935-81	s	RES, CHIP 100K (1005)
R601	1-208-935-81	s	RES, CHIP 100K (1005)
R602	1-208-887-81	s	RES, CHIP 1.0K (1005)
R603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R604	1-220-878-81	s	RES, CHIP 22 (1005)
R605	1-220-878-81	s	RES, CHIP 22 (1005)
R606	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-220-878-81	s	RES, CHIP 22 (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-208-935-81	s	RES, CHIP 100K (1005)
R616	1-208-935-81	s	RES, CHIP 100K (1005)
R617	1-208-935-81	s	RES, CHIP 100K (1005)
R1001	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1101	1-208-911-81	s	RES, CHIP 10K (1005)
R1103	1-208-911-81	s	RES, CHIP 10K (1005)
R1105	1-208-911-81	s	RES, CHIP 10K (1005)
R1108	1-220-878-81	s	RES, CHIP 22 (1005)
R1109	1-208-911-81	s	RES, CHIP 10K (1005)
R1111	1-220-878-81	s	RES, CHIP 22 (1005)
R1112	1-220-878-81	s	RES, CHIP 22 (1005)
R1117	1-220-878-81	s	RES, CHIP 22 (1005)
R1118	1-220-878-81	s	RES, CHIP 22 (1005)
R1119	1-220-878-81	s	RES, CHIP 22 (1005)
R1121	1-208-911-81	s	RES, CHIP 10K (1005)
R1122	1-208-911-81	s	RES, CHIP 10K (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1126	1-208-871-81	s	RES, CHIP 220 (1005)
R1127	1-208-871-81	s	RES, CHIP 220 (1005)
R1128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1129	1-208-871-81	s	RES, CHIP 220 (1005)
R1130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1131	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
R1132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1133	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1134	1-208-911-81	s	RES, CHIP 10K (1005)
R1202	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1208	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1218	1-220-878-81	s	RES, CHIP 22 (1005)
R1219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1317	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1318	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1319	1-208-860-81	s	RES, CHIP 75 (1005)
R1320	1-208-860-81	s	RES, CHIP 75 (1005)
R1321	1-208-860-81	s	RES, CHIP 75 (1005)
R1322	1-208-860-81	s	RES, CHIP 75 (1005)
R1323	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1324	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1401	1-220-878-81	s	RES, CHIP 22 (1005)
R1402	1-220-878-81	s	RES, CHIP 22 (1005)
R1403	1-220-878-81	s	RES, CHIP 22 (1005)
R1404	1-220-878-81	s	RES, CHIP 22 (1005)
R1405	1-220-878-81	s	RES, CHIP 22 (1005)
R1406	1-220-878-81	s	RES, CHIP 22 (1005)
R1407	1-220-878-81	s	RES, CHIP 22 (1005)
R1408	1-220-878-81	s	RES, CHIP 22 (1005)
R1409	1-220-878-81	s	RES, CHIP 22 (1005)
R1410	1-220-878-81	s	RES, CHIP 22 (1005)
R1411	1-220-878-81	s	RES, CHIP 22 (1005)
R1412	1-220-878-81	s	RES, CHIP 22 (1005)
R1413	1-220-878-81	s	RES, CHIP 22 (1005)
R1417	1-220-878-81	s	RES, CHIP 22 (1005)
R1418	1-220-878-81	s	RES, CHIP 22 (1005)
R1419	1-220-878-81	s	RES, CHIP 22 (1005)
R1426	1-208-911-81	s	RES, CHIP 10K (1005)
R1428	1-220-878-81	s	RES, CHIP 22 (1005)
R1429	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1430	1-220-878-81	s	RES, CHIP 22 (1005)
R1432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1434	1-220-878-81	s	RES, CHIP 22 (1005)
R1436	1-220-878-81	s	RES, CHIP 22 (1005)
R1439	1-220-878-81	s	RES, CHIP 22 (1005)
R1440	1-220-878-81	s	RES, CHIP 22 (1005)
R1441	1-208-911-81	s	RES, CHIP 10K (1005)
R1442	1-208-911-81	s	RES, CHIP 10K (1005)
R1443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1447	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1449	1-208-911-81	s	RES, CHIP 10K (1005)

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB613	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB614	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB615	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB706	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB707	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB708	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB709	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB718	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB719	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB720	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB721	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB722	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB723	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB724	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB725	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB726	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB801	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB802	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB803	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB804	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB805	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB806	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB807	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB808	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB903	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB904	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB905	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(XPT-31/31A BOARD (SUFFIX 14))

Ref. No. or Q'ty	Part No.	SP	Description
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1101	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1105	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1107	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1108	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1109	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1110	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1111	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1402	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
S701	1-771-721-21	s	SWITCH, TACTILE
S1102	1-771-721-21	s	SWITCH, TACTILE
T1301	1-443-851-21	s	GIGABIT MAGNETIC MODULE
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X1101	1-813-488-11	s	OSCILLATOR, CRYSTAL

XPT-32 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
3pcs	3-561-426-01	s	CUSHION
4pcs	4-143-557-01	s	SPRING, COMPRESSION
4pcs	4-143-559-01	s	PIN, PUSH
1pc	4-183-378-01	s	PC BOARD GUARD FL
1pc	4-183-379-01	s	PC BOARD GUARD FR
1pc	4-187-619-01	s	SHEET,RADIATION(25X25X2)
1pc	4-187-620-01	s	SHEET,RADIATION(33X33X1.5)
1pc	7-626-320-61	s	PIN, SPRING 3X18
6pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-951-01	s	SCREW +PSW 3X14
1pc	A-1771-683-A	s	ASSY, PBS
2pcs	A-1771-684-A	s	BOARD LEVER F ASSY
C201	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C202	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C211	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C219	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C221	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C229	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C231	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C240	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C311	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C312	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C409	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C410	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C418	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C420	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C422	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C424	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C426	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C427	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C617	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C618	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C630	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C631	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C632	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C633	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C634	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C636	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C640	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C641	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C642	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C645	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C701	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C802	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C803	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C804	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C805	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C806	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C807	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C808	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C810	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C811	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C812	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C813	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C815	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C816	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C817	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C818	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C819	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C820	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C821	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C822	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C823	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C824	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C825	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C826	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C827	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C828	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C829	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C830	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C831	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C832	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C833	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C835	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C902	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C903	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C904	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C910	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C911	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C912	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C913	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C914	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C915	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C916	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C917	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C918	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C919	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C920	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C921	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C922	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C923	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C924	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C925	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C926	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C927	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C928	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C929	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C930	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C931	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C932	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C933	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C934	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C935	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C940	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C942	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C948	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C953	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C961	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C968	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C969	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C970	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C972	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C974	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C975	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C976	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C977	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C979	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C981	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C983	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C984	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C987	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C989	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C991	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C993	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C994	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C995	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C996	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C997	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C999	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1301	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1302	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1303	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1304	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1355	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1356	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1373	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1383	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1385	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1386	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1388	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1390	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1391	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1392	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1393	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1394	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1395	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1396	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1397	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1398	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1399	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1447	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1465	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1466	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1467	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1468	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1469	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1470	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1471	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1472	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1474	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1476	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1478	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1480	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1485	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1486	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1487	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1488	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1489	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1490	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1491	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C1492	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C9001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9010	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
CN701	1-770-627-21	s	PIN, CONNECTOR 10P
D201	8-719-069-28	s	DI 1SS400FJTE61
D202	8-719-069-28	s	DI 1SS400FJTE61
D203	6-502-197-01	s	DI SML-D12M8WT86SM
D301	6-502-197-01	s	DI SML-D12M8WT86SM
D303	6-502-197-01	s	DI SML-D12M8WT86SM

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D304	6-502-197-01	s	DI SML-D12M8WT86SM
D305	6-502-197-01	s	DI SML-D12M8WT86SM
D306	6-502-197-01	s	DI SML-D12M8WT86SM
D401	6-502-598-01	s	DI SML-D12U8WT86
D616	6-502-598-01	s	DI SML-D12U8WT86
D617	6-502-598-01	s	DI SML-D12U8WT86
D618	6-502-352-01	s	DI SML-522MU8WT86PQ
D619	6-501-436-01	s	DIODE SML412BC6TT86
D620	6-502-352-01	s	DI SML-522MU8WT86PQ
D901	8-719-069-28	s	DI 1SS400FJTE61
D902	8-719-069-28	s	DI 1SS400FJTE61
D903	8-719-069-28	s	DI 1SS400FJTE61
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
E201	1-535-877-22	s	CHIP, CHECKER
E202	1-535-877-22	s	CHIP, CHECKER
E203	1-535-877-22	s	CHIP, CHECKER
E204	1-535-877-22	s	CHIP, CHECKER
E205	1-535-877-22	s	CHIP, CHECKER
E206	1-535-877-22	s	CHIP, CHECKER
E207	1-535-877-22	s	CHIP, CHECKER
E208	1-535-877-22	s	CHIP, CHECKER
E209	1-535-877-22	s	CHIP, CHECKER
E210	1-535-877-22	s	CHIP, CHECKER
E901	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F201	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB302	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC305	6-700-655-01	s	IC LT1963ES8#TR
IC402	6-714-109-01	s	IC LMK03000CISQ
IC403	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC404	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC405	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC501	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC502	6-715-585-01	s	IC TC74LCX16245(EL,F)
IC503	6-714-365-01	s	IC MX29LV640EBTI-70G
IC601	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC602	6-708-324-01	s	IC R3112N301A-TR-FA
IC603	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC604	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC702	6-702-879-01	s	IC R3112N281A-TR-FA
IC703	8-759-592-47	s	IC TC7SZ08FU(TE85R)
L901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L908	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L909	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L910	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L911	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L912	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L913	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L914	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L915	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L916	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L917	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L918	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R201	1-218-985-11	s	RES, CHIP 470K (1005)
R202	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-935-81	s	RES, CHIP 100K (1005)
R204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R205	1-208-895-81	s	RES, CHIP 2.2K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-903-81	s	RES, CHIP 4.7K (1005)
R213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R214	1-208-935-81	s	RES, CHIP 100K (1005)
R215	1-208-935-81	s	RES, CHIP 100K (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-927-81	s	RES, CHIP 47K (1005)
R218	1-208-715-11	s	RES, CHIP 22K (1005)
R219	1-208-715-11	s	RES, CHIP 22K (1005)
R221	1-208-879-81	s	RES, CHIP 470 (1005)
R222	1-208-903-81	s	RES, CHIP 4.7K (1005)
R223	1-208-927-81	s	RES, CHIP 47K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-927-81	s	RES, CHIP 47K (1005)
R226	1-208-935-81	s	RES, CHIP 100K (1005)
R227	1-208-935-81	s	RES, CHIP 100K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R305	1-208-887-81	s	RES, CHIP 1.0K (1005)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R314	1-208-911-81	s	RES, CHIP 10K (1005)
R315	1-208-911-81	s	RES, CHIP 10K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-887-81	s	RES, CHIP 1.0K (1005)
R318	1-208-887-81	s	RES, CHIP 1.0K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-935-81	s	RES, CHIP 100K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-903-81	s	RES, CHIP 4.7K (1005)
R323	1-208-895-81	s	RES, CHIP 2.2K (1005)
R324	1-208-887-81	s	RES, CHIP 1.0K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-935-81	s	RES, CHIP 100K (1005)
R327	1-208-911-81	s	RES, CHIP 10K (1005)
R328	1-208-903-81	s	RES, CHIP 4.7K (1005)
R329	1-208-895-81	s	RES, CHIP 2.2K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-935-81	s	RES, CHIP 100K (1005)
R333	1-208-911-81	s	RES, CHIP 10K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-895-81	s	RES, CHIP 2.2K (1005)
R336	1-208-715-11	s	RES, CHIP 22K (1005)
R337	1-208-911-81	s	RES, CHIP 10K (1005)
R338	1-208-935-81	s	RES, CHIP 100K (1005)
R339	1-208-911-81	s	RES, CHIP 10K (1005)
R340	1-208-903-81	s	RES, CHIP 4.7K (1005)
R341	1-208-895-81	s	RES, CHIP 2.2K (1005)
R342	1-208-911-81	s	RES, CHIP 10K (1005)
R343	1-208-887-81	s	RES, CHIP 1.0K (1005)
R344	1-208-887-81	s	RES, CHIP 1.0K (1005)
R345	1-208-715-11	s	RES, CHIP 22K (1005)
R346	1-208-927-81	s	RES, CHIP 47K (1005)
R347	1-208-903-81	s	RES, CHIP 4.7K (1005)
R348	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-220-878-81	s	RES, CHIP 22 (1005)
R402	1-220-878-81	s	RES, CHIP 22 (1005)
R403	1-220-878-81	s	RES, CHIP 22 (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-208-927-81	s	RES, CHIP 47K (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R412	1-208-863-81	s	RES, CHIP 100 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-208-895-81	s	RES, CHIP 2.2K (1005)
R423	1-208-911-81	s	RES, CHIP 10K (1005)
R424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-208-887-81	s	RES, CHIP 1.0K (1005)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R426	1-208-935-81	s	RES, CHIP 100K (1005)
R427	1-220-878-81	s	RES, CHIP 22 (1005)
R428	1-220-878-81	s	RES, CHIP 22 (1005)
R429	1-220-878-81	s	RES, CHIP 22 (1005)
R430	1-220-878-81	s	RES, CHIP 22 (1005)
R431	1-220-878-81	s	RES, CHIP 22 (1005)
R432	1-220-878-81	s	RES, CHIP 22 (1005)
R433	1-220-878-81	s	RES, CHIP 22 (1005)
R434	1-220-878-81	s	RES, CHIP 22 (1005)
R435	1-220-878-81	s	RES, CHIP 22 (1005)
R436	1-220-878-81	s	RES, CHIP 22 (1005)
R437	1-220-878-81	s	RES, CHIP 22 (1005)
R438	1-220-878-81	s	RES, CHIP 22 (1005)
R439	1-220-878-81	s	RES, CHIP 22 (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-208-935-81	s	RES, CHIP 100K (1005)
R444	1-208-935-81	s	RES, CHIP 100K (1005)
R445	1-208-935-81	s	RES, CHIP 100K (1005)
R446	1-208-935-81	s	RES, CHIP 100K (1005)
R447	1-208-935-81	s	RES, CHIP 100K (1005)
R448	1-208-935-81	s	RES, CHIP 100K (1005)
R449	1-208-935-81	s	RES, CHIP 100K (1005)
R450	1-208-935-81	s	RES, CHIP 100K (1005)
R451	1-208-935-81	s	RES, CHIP 100K (1005)
R452	1-208-935-81	s	RES, CHIP 100K (1005)
R453	1-208-935-81	s	RES, CHIP 100K (1005)
R502	1-208-935-81	s	RES, CHIP 100K (1005)
R503	1-208-911-81	s	RES, CHIP 10K (1005)
R504	1-208-911-81	s	RES, CHIP 10K (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-220-878-81	s	RES, CHIP 22 (1005)
R605	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-220-878-81	s	RES, CHIP 22 (1005)
R610	1-208-903-81	s	RES, CHIP 4.7K (1005)
R611	1-208-887-81	s	RES, CHIP 1.0K (1005)
R617	1-220-878-81	s	RES, CHIP 22 (1005)
R618	1-220-878-81	s	RES, CHIP 22 (1005)
R619	1-220-878-81	s	RES, CHIP 22 (1005)
R620	1-220-878-81	s	RES, CHIP 22 (1005)
R621	1-220-878-81	s	RES, CHIP 22 (1005)
R622	1-220-878-81	s	RES, CHIP 22 (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R625	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-220-878-81	s	RES, CHIP 22 (1005)
R627	1-220-878-81	s	RES, CHIP 22 (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R629	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-220-878-81	s	RES, CHIP 22 (1005)
R631	1-220-878-81	s	RES, CHIP 22 (1005)
R632	1-220-878-81	s	RES, CHIP 22 (1005)
R633	1-220-878-81	s	RES, CHIP 22 (1005)
R634	1-220-878-81	s	RES, CHIP 22 (1005)
R635	1-220-878-81	s	RES, CHIP 22 (1005)
R636	1-220-878-81	s	RES, CHIP 22 (1005)
R639	1-220-878-81	s	RES, CHIP 22 (1005)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-911-81	s	RES, CHIP 10K (1005)
R643	1-208-911-81	s	RES, CHIP 10K (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)
R645	1-208-911-81	s	RES, CHIP 10K (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-911-81	s	RES, CHIP 10K (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-208-911-81	s	RES, CHIP 10K (1005)
R652	1-208-911-81	s	RES, CHIP 10K (1005)
R653	1-208-911-81	s	RES, CHIP 10K (1005)
R654	1-208-911-81	s	RES, CHIP 10K (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R656	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-887-81	s	RES, CHIP 1.0K (1005)
R658	1-208-887-81	s	RES, CHIP 1.0K (1005)
R659	1-208-871-81	s	RES, CHIP 220 (1005)
R660	1-208-871-81	s	RES, CHIP 220 (1005)
R661	1-208-887-81	s	RES, CHIP 1.0K (1005)
R662	1-208-871-81	s	RES, CHIP 220 (1005)
R680	1-220-878-81	s	RES, CHIP 22 (1005)
R681	1-208-911-81	s	RES, CHIP 10K (1005)
R682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R683	1-220-878-81	s	RES, CHIP 22 (1005)
R684	1-220-878-81	s	RES, CHIP 22 (1005)
R685	1-220-878-81	s	RES, CHIP 22 (1005)
R686	1-220-878-81	s	RES, CHIP 22 (1005)
R687	1-220-878-81	s	RES, CHIP 22 (1005)
R689	1-220-878-81	s	RES, CHIP 22 (1005)
R702	1-208-887-81	s	RES, CHIP 1.0K (1005)
R705	1-208-887-81	s	RES, CHIP 1.0K (1005)
R706	1-208-887-81	s	RES, CHIP 1.0K (1005)
R707	1-208-887-81	s	RES, CHIP 1.0K (1005)
R708	1-208-887-81	s	RES, CHIP 1.0K (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R714	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R715	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R720	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R721	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R722	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R723	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R724	1-220-878-81	s	RES, CHIP 22 (1005)
R725	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R732	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R733	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R737	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R738	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R739	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R740	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R741	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R742	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R743	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R744	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R750	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R751	1-218-985-11	s	RES, CHIP 470K (1005)
R753	1-208-927-81	s	RES, CHIP 47K (1005)
R756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R772	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R774	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R777	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R778	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R779	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R780	1-208-879-81	s	RES, CHIP 470 (1005)
R781	1-208-879-81	s	RES, CHIP 470 (1005)
R782	1-208-879-81	s	RES, CHIP 470 (1005)
R783	1-208-903-81	s	RES, CHIP 4.7K (1005)
R812	1-208-911-81	s	RES, CHIP 10K (1005)
R813	1-208-911-81	s	RES, CHIP 10K (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R815	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-208-911-81	s	RES, CHIP 10K (1005)
R817	1-208-911-81	s	RES, CHIP 10K (1005)
R818	1-208-911-81	s	RES, CHIP 10K (1005)
R819	1-208-911-81	s	RES, CHIP 10K (1005)
R820	1-208-911-81	s	RES, CHIP 10K (1005)
R901	1-208-927-81	s	RES, CHIP 47K (1005)
R902	1-208-927-81	s	RES, CHIP 47K (1005)
R903	1-208-927-81	s	RES, CHIP 47K (1005)
R904	1-208-887-81	s	RES, CHIP 1.0K (1005)
R905	1-208-903-81	s	RES, CHIP 4.7K (1005)
R906	1-208-887-81	s	RES, CHIP 1.0K (1005)
R907	1-208-887-81	s	RES, CHIP 1.0K (1005)
R908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R909	1-208-887-81	s	RES, CHIP 1.0K (1005)
R910	1-208-887-81	s	RES, CHIP 1.0K (1005)
R911	1-208-887-81	s	RES, CHIP 1.0K (1005)
R912	1-208-715-11	s	RES, CHIP 22K (1005)
R913	1-208-903-81	s	RES, CHIP 4.7K (1005)
R914	1-208-903-81	s	RES, CHIP 4.7K (1005)
R915	1-208-903-81	s	RES, CHIP 4.7K (1005)
R916	1-208-863-81	s	RES, CHIP 100 (1005)
R917	1-208-863-81	s	RES, CHIP 100 (1005)
R918	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R919	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R920	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R921	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1001	1-220-878-81	s	RES, CHIP 22 (1005)
R1002	1-220-878-81	s	RES, CHIP 22 (1005)
R1003	1-220-878-81	s	RES, CHIP 22 (1005)
R1004	1-220-878-81	s	RES, CHIP 22 (1005)
R1005	1-220-878-81	s	RES, CHIP 22 (1005)
R1006	1-220-878-81	s	RES, CHIP 22 (1005)
R1007	1-220-878-81	s	RES, CHIP 22 (1005)
R1008	1-220-878-81	s	RES, CHIP 22 (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1010	1-220-878-81	s	RES, CHIP 22 (1005)
R1011	1-220-878-81	s	RES, CHIP 22 (1005)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1012	1-220-878-81	s	RES, CHIP 22 (1005)
R1013	1-220-878-81	s	RES, CHIP 22 (1005)
R1017	1-220-878-81	s	RES, CHIP 22 (1005)
R1018	1-220-878-81	s	RES, CHIP 22 (1005)
R1019	1-220-878-81	s	RES, CHIP 22 (1005)
R1025	1-208-911-81	s	RES, CHIP 10K (1005)
R1027	1-220-878-81	s	RES, CHIP 22 (1005)
R1028	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1029	1-220-878-81	s	RES, CHIP 22 (1005)
R1031	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1033	1-220-878-81	s	RES, CHIP 22 (1005)
R1035	1-220-878-81	s	RES, CHIP 22 (1005)
R1038	1-220-878-81	s	RES, CHIP 22 (1005)
R1039	1-220-878-81	s	RES, CHIP 22 (1005)
R1040	1-208-911-81	s	RES, CHIP 10K (1005)
R1041	1-208-911-81	s	RES, CHIP 10K (1005)
R1042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1048	1-208-911-81	s	RES, CHIP 10K (1005)
RB401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB408	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB409	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB410	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB411	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB412	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB413	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB414	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB415	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB501	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB502	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB503	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB504	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB505	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB506	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB507	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB508	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB509	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB510	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB511	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB512	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB513	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB514	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB515	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB516	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB517	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB518	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB519	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB520	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(XPT-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB521	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB522	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB523	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB524	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB601	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB607	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1002	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S602	1-771-721-21	s	SWITCH, TACTILE
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
X401	1-813-488-11	s	OSCILLATOR, CRYSTAL

2-4. Supplied Accessories

SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1778-014-A	s	ASSY, FRONT BK 1/1
1pc	A-1778-015-A	s	ASSY, CN BK 1/1
1pc	1-695-542-21	s	TERMINATOR 75
1pc	4-186-134-01	s	PANEL PSBK

Section 3
Block Diagrams

Index

Board name		Page
CA-82		3-4
CA-82A		3-4
DVP-53		3-5
FC-112		3-7
MIX-53	SUFFIX: -13	3-8
	SUFFIX: -14	3-8 (a)
MY-118		3-10
OUT-35		3-11
OUT-35A		3-11
Overall	MVS-8000X	3-2
	MVS-7000X	3-3
SG-272A		3-13
SIO-26A		3-13
XPT-31/31A		3-14
XPT-32		3-15

Overall
MVS-8000X

Overall
MVS-8000X

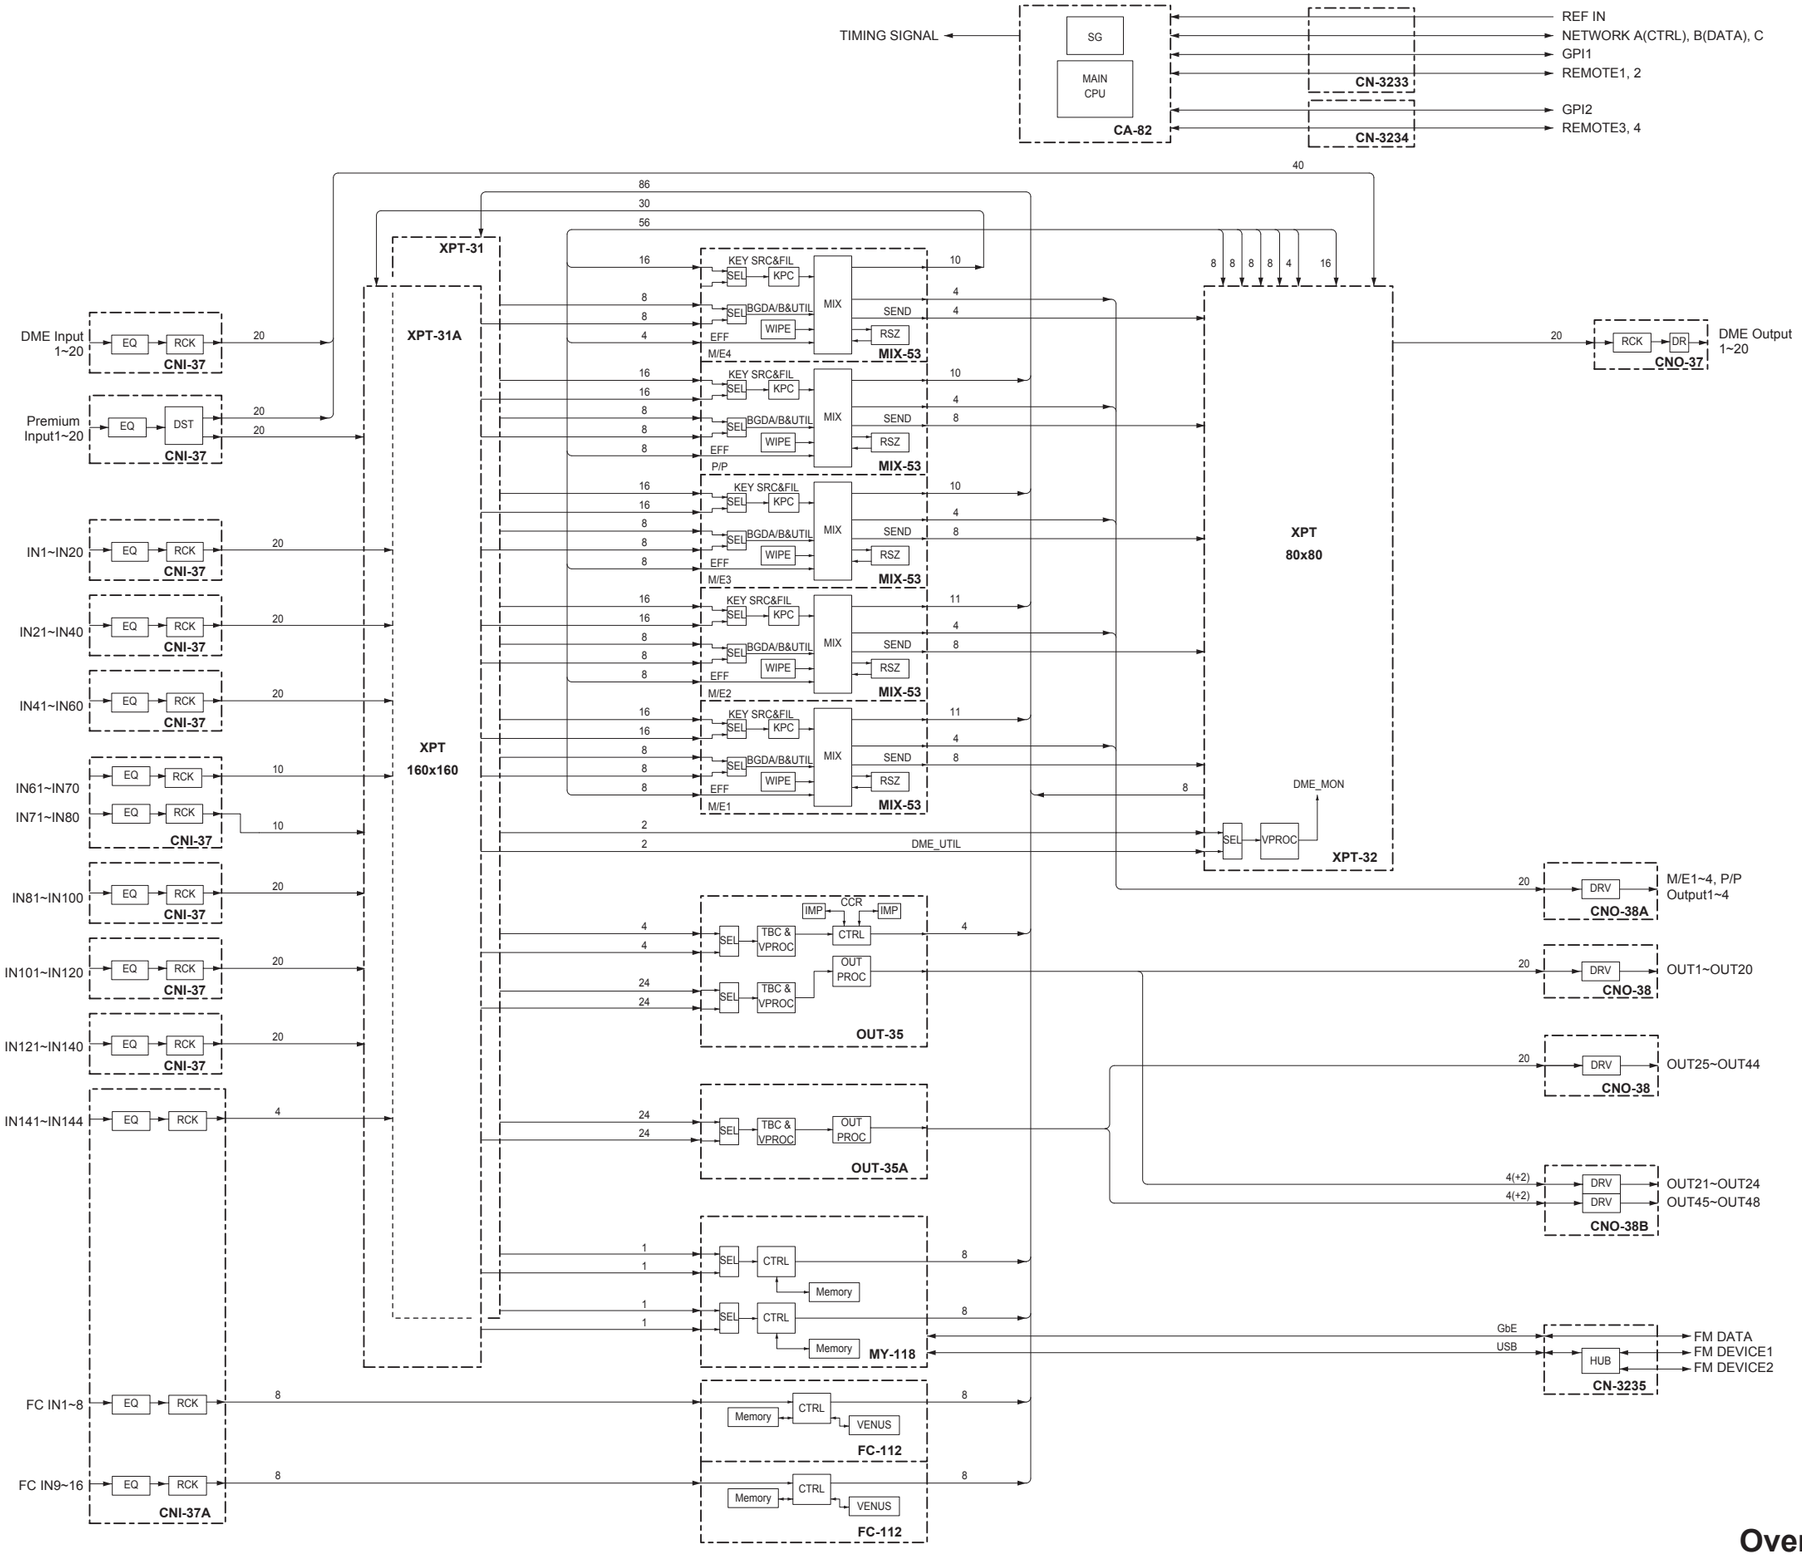

Overall
MVS-8000X

Overall

MVS-7000X

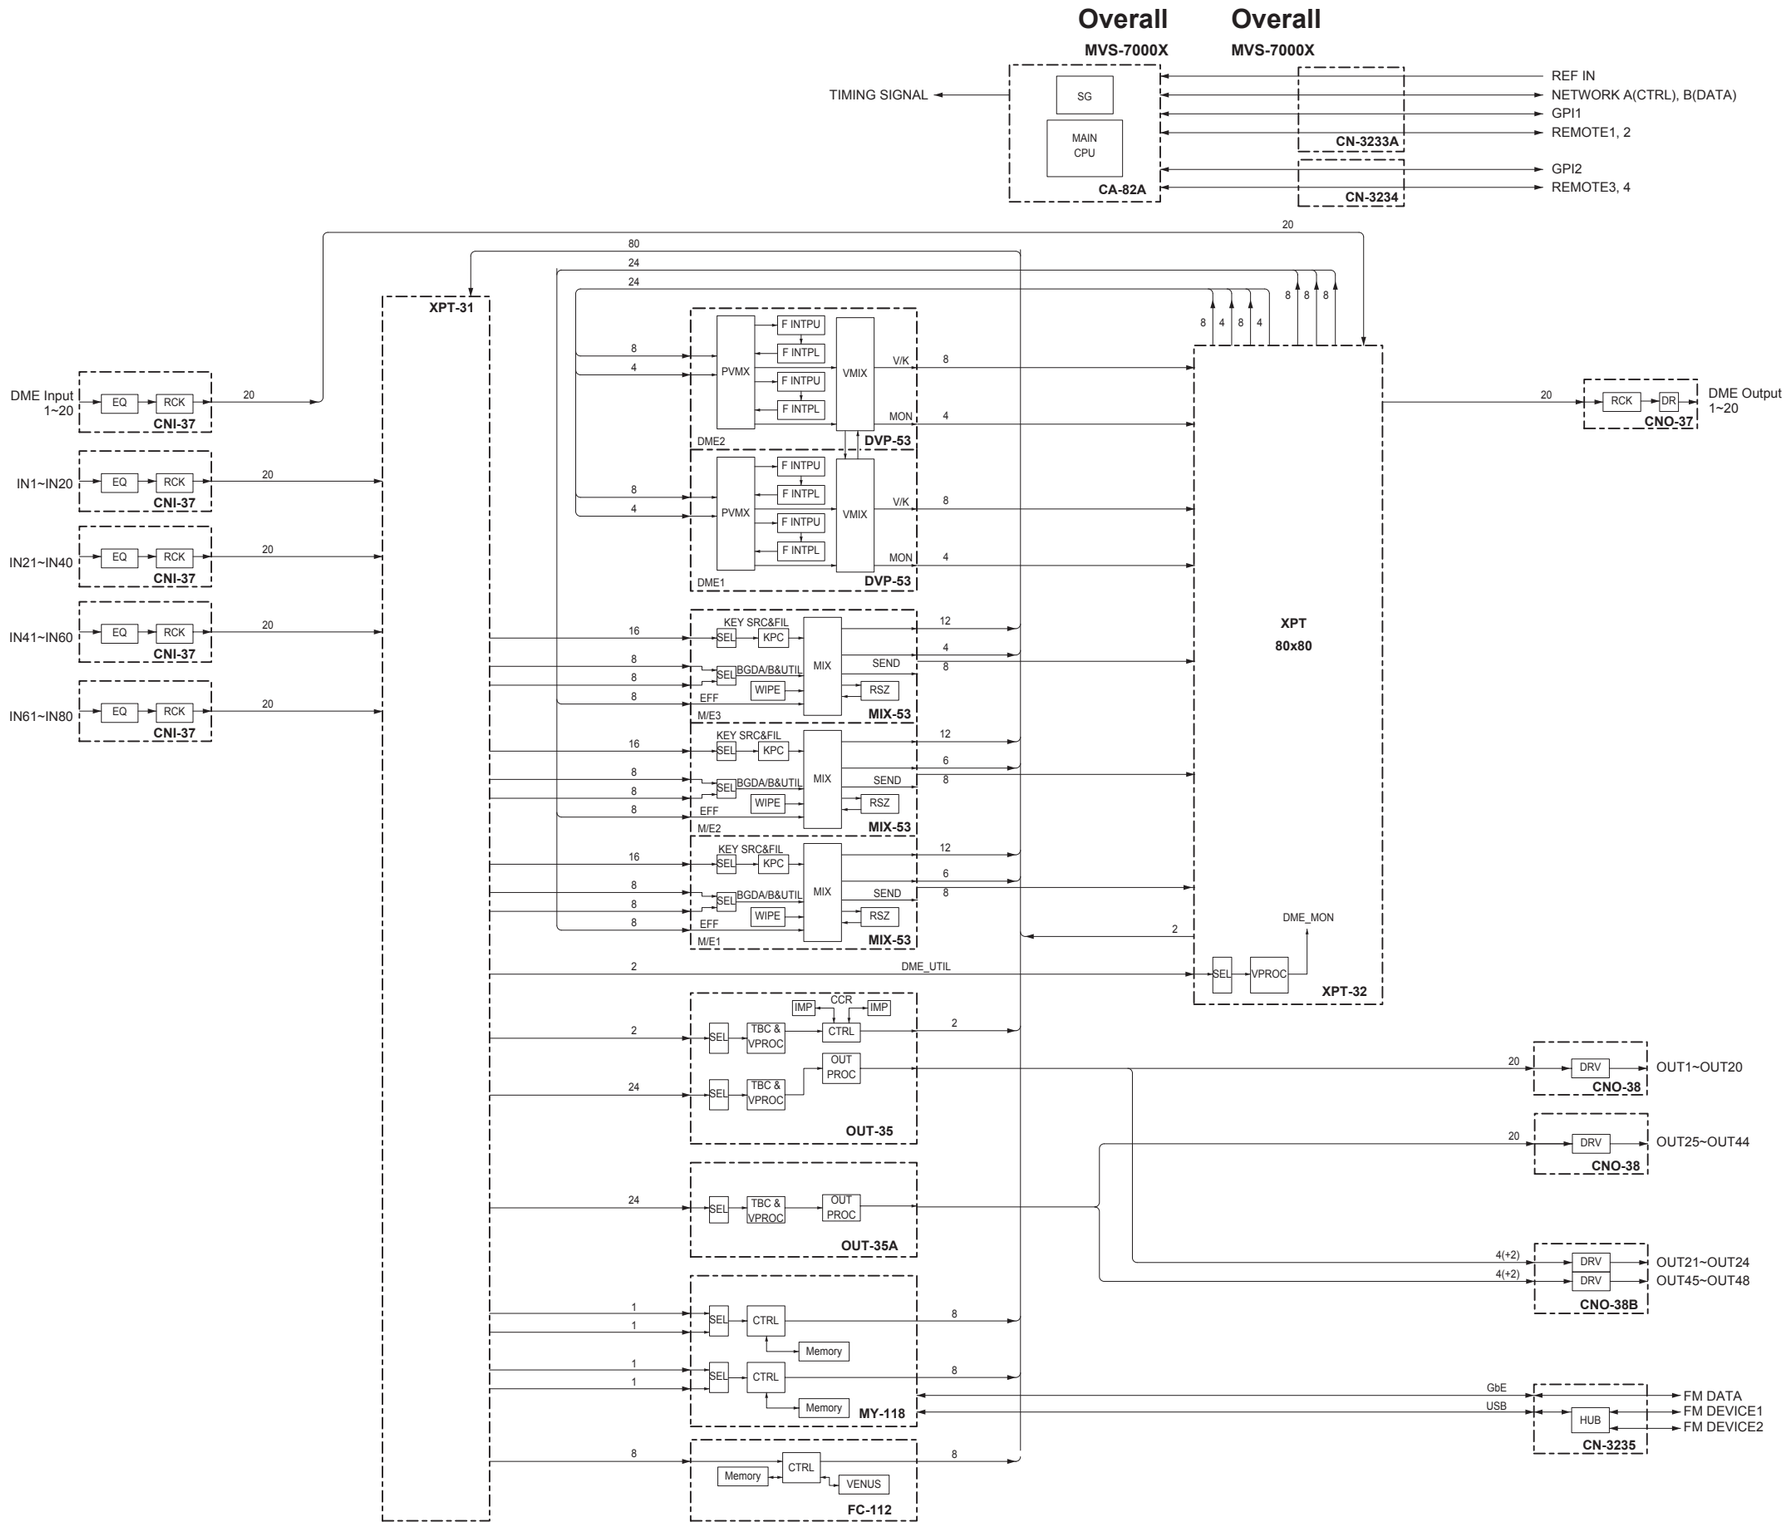

Overall

MVS-7000X

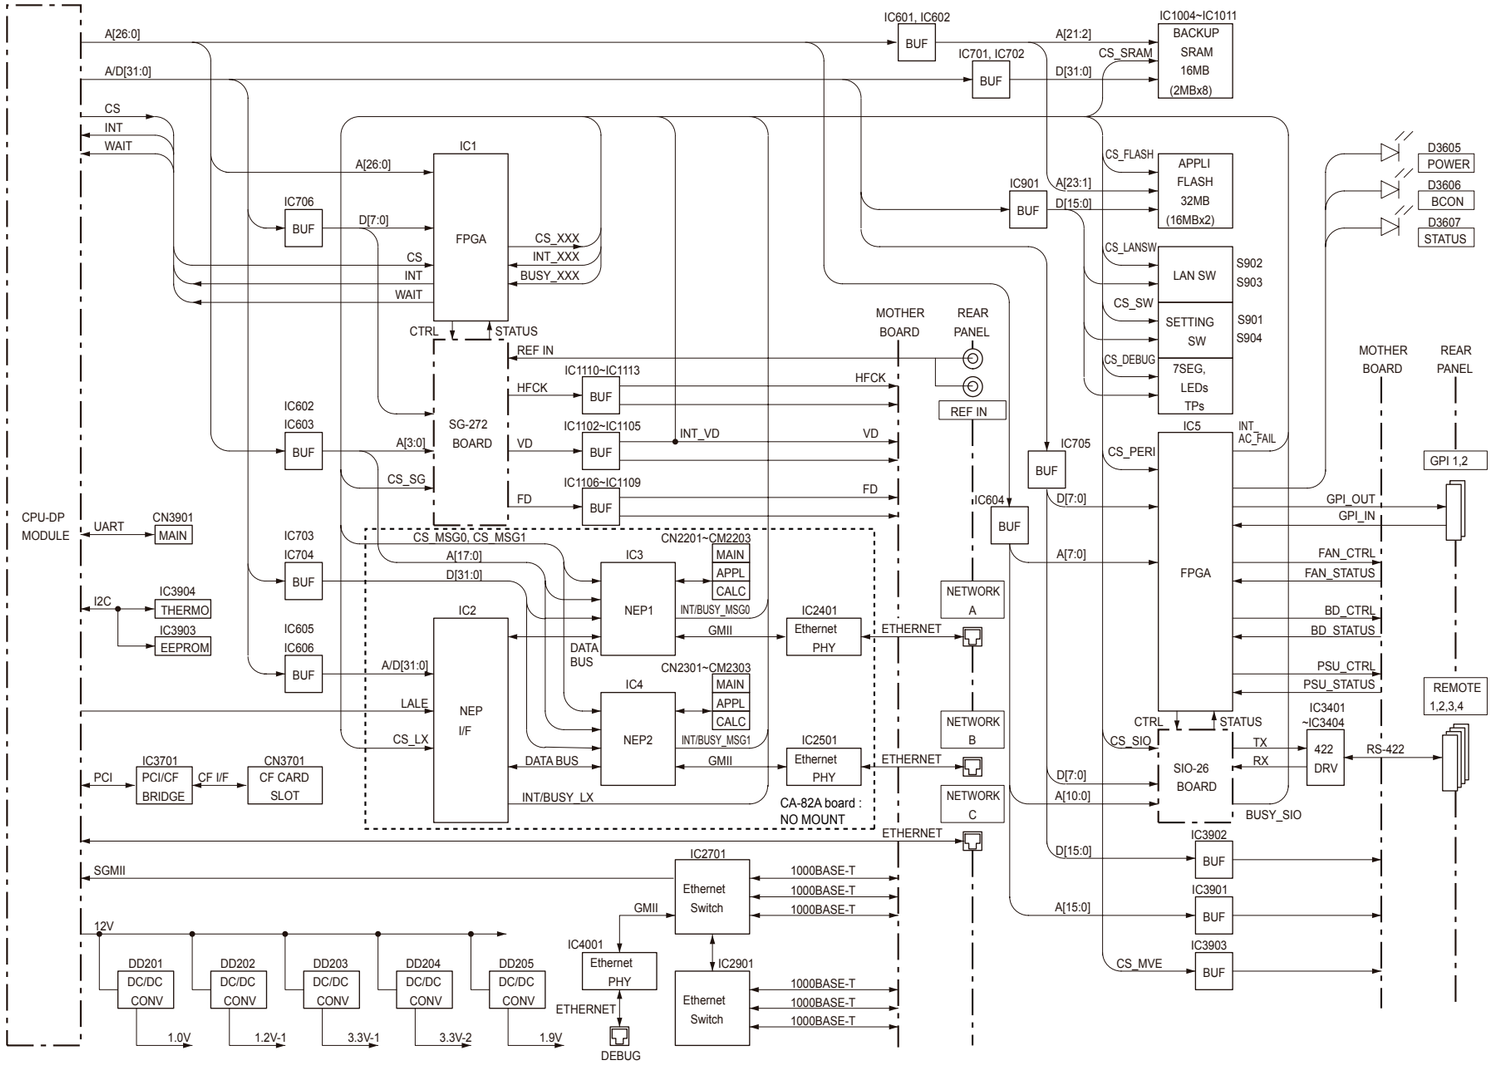

CPU Board

CA-82
CA-82A

DVP-53 (1/2)

DVP-53 board (1/2)

VIDEO BLOCK

CNJ1
CH1V_IN
CH1K_IN
CH2V_IN
CH2K_IN
CH3V_IN
CH3K_IN
CH4V_IN
CH4V_IN
*1

IC5 (1/2)
MFSDIX
V/K
(S/P)

SS_VK_CH0-11
SS_VK_CLK

CNE1
CH1_EXTV_IN
CH2_EXTV_IN
CH3_EXTV_IN
CH4_EXTV_IN
*1

IC6 (1/2)
MFSDIX
EXTV/MON
(S/P)

SS_EXTV_CH0-7
SS_EXTV_CLK

IC11
PVMIX

IC2201
DDR2_SDRAM
(Freeze)
A_FRZ_0-15
DQ_FRZ_0-16

IC2301, IC2302
DDR2_SDRAM
(Ext V)
A_DL_0-15
DQ_DL_0-16

IC4201, IC4203, IC4301, IC4302
DDR2_SDRAM
(Recursive)
A_RV_0-15
DQ_RV_0-16

IC7
FINTPU CH1

SS_FLTR0_CH0-14
SS_FLTR0_CLK

A_SC0_0-15
DQ_SC0_0-16
IC2401, IC2403
DDR2_SDRAM
(Scan Conv.)

A_DDR0_0-15
DQ_DDR0_0-16
IC2501, IC2502, IC2601, IC2603, IC2701, IC2702
DDR2_SDRAM
(INTP)

SS_IPCON0_CH0-6
SS_IPCON0_CLK
SS_INTPU0_CH0-16
SS_INTPU0_CLK
SS_INTPL0_CH0-11
SS_INTPL0_CLK

IC9
AINTPL CH1

SS_PVMIX0_CH0-18
SS_PVMIX0_CLK

A_IP0_0-15
DQ_IP0_0-16
IC2801
DDR2_SDRAM
(IP Conv.)

A_DDR0_0-15
DQ_DDR0_0-16
IC2901, IC2903, IC3001, IC3002, IC3101, IC3102
DDR2_SDRAM
(INTP)

A_SRAM0_0-19
DQ_SRAM0_0-35
IC3201
DDR_SRAM
(BITMAP)

SS_VIF0_CH0-16
SS_VIF0_CLK

IC8
FINTPU CH2

SS_FLTR1_CH0-14
SS_FLTR1_CLK

A_SC1_0-15
DQ_SC1_0-16
IC3301, IC3303
DDR2_SDRAM
(Scan Conv.)

A_DDR1_0-15
DQ_DDR0_0-16
IC3401, IC3402, IC3501, IC3503, IC3601, IC3602
DDR2_SDRAM
(INTP)

SS_IPCON1_CH0-6
SS_IPCON1_CLK
SS_INTPU1_CH0-16
SS_INTPU1_CLK
SS_INTPL1_CH0-11
SS_INTPL1_CLK

IC10
AINTPL CH2

SS_PVMIX1_CH0-18
SS_PVMIX1_CLK

A_IP1_0-15
DQ_IP1_0-16
IC3701
DDR2_SDRAM
(IP Conv.)

A_DDR1_0-15
DQ_DDR1_0-16
IC3801, IC3803, IC3901, IC3902, IC4001, IC4002
DDR2_SDRAM
(INTP)

A_SRAM1_0-19
DQ_SRAM1_0-35
IC4101
DDR_SRAM
(BITMAP)

SS_VIF1_CH0-16
SS_VIF1_CLK

IC12
VMIX

VIDEO BLOCK

SS_PGM_CH0-11
SS_PGM_CLK

IC5 (2/2)
MFSDIX
V/K
(P/S)

CH1V_OUT
CH1K_OUT
CH2V_OUT
CH2K_OUT
CH3V_OUT
CH3K_OUT
CH4V_OUT
CH4V_OUT

CNJ1
*1

SS_MON_CH0-8
SS_MON_CLK

IC6 (2/2)
MFSDIX
EXTV/MON
(P/S)

CH1_MON_OUT
CH2_MON_OUT
CH3_MON_OUT
CH4_MON_OUT

CNE1
*1

A_RV_0-15
DQ_RV_0-16
IC4401, IC4402, IC4501, IC4502
DDR2_SDRAM
(Recursive)

A_SRAM_0-18
DQ_SRAM_0-35
IC4601
ZBT_SRAM
(Graphic)

EFVMI_0-12
EFVMI_CLK
EFVMO_0-12
EFVMO_CLK

CNK1
CNP1
*1

DME Board
DVP-53 (1/2)

*1: REFER TO SCHEMATIC

3-5

DVP-53 board (2/2)

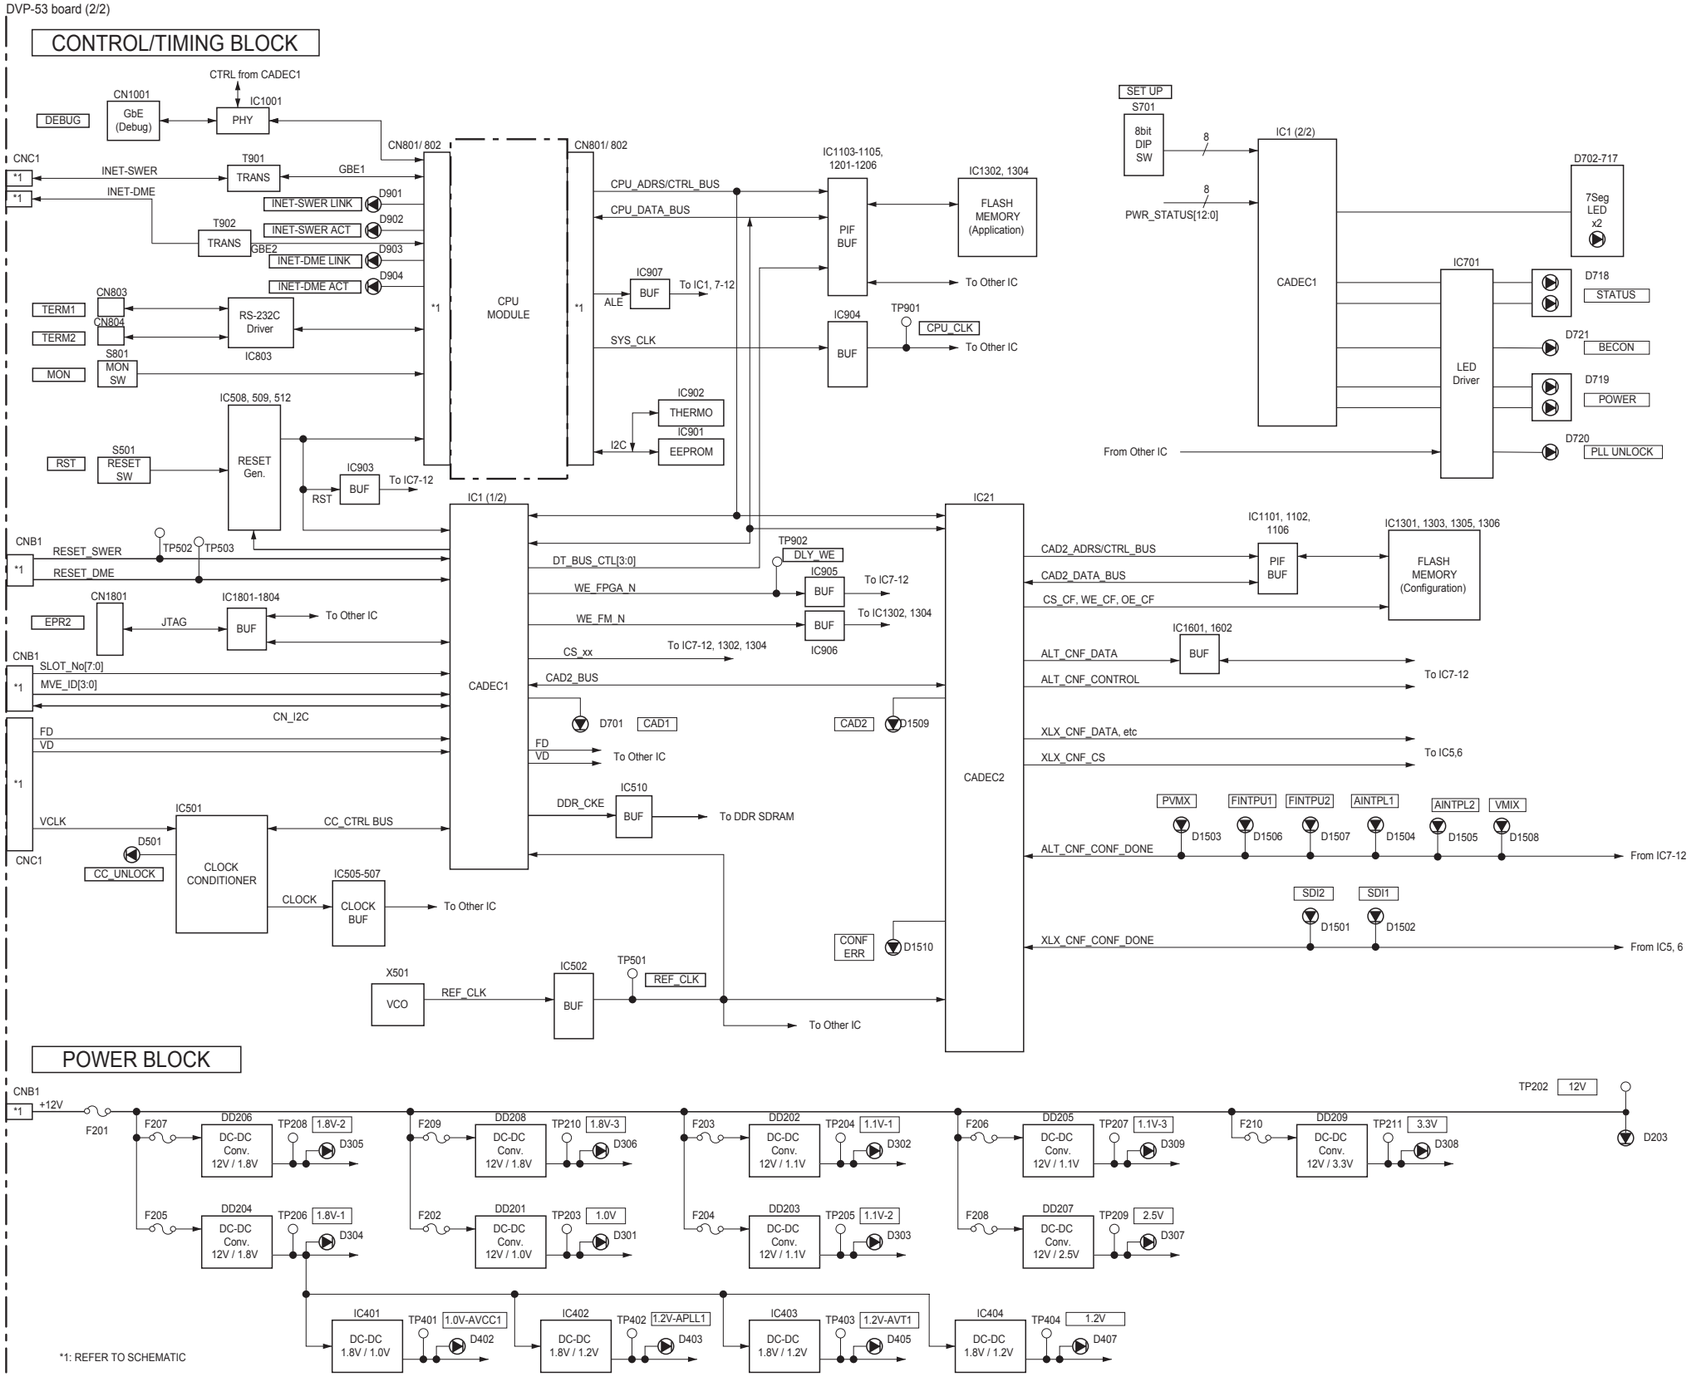

DME Board

DVP-53 (2/2)

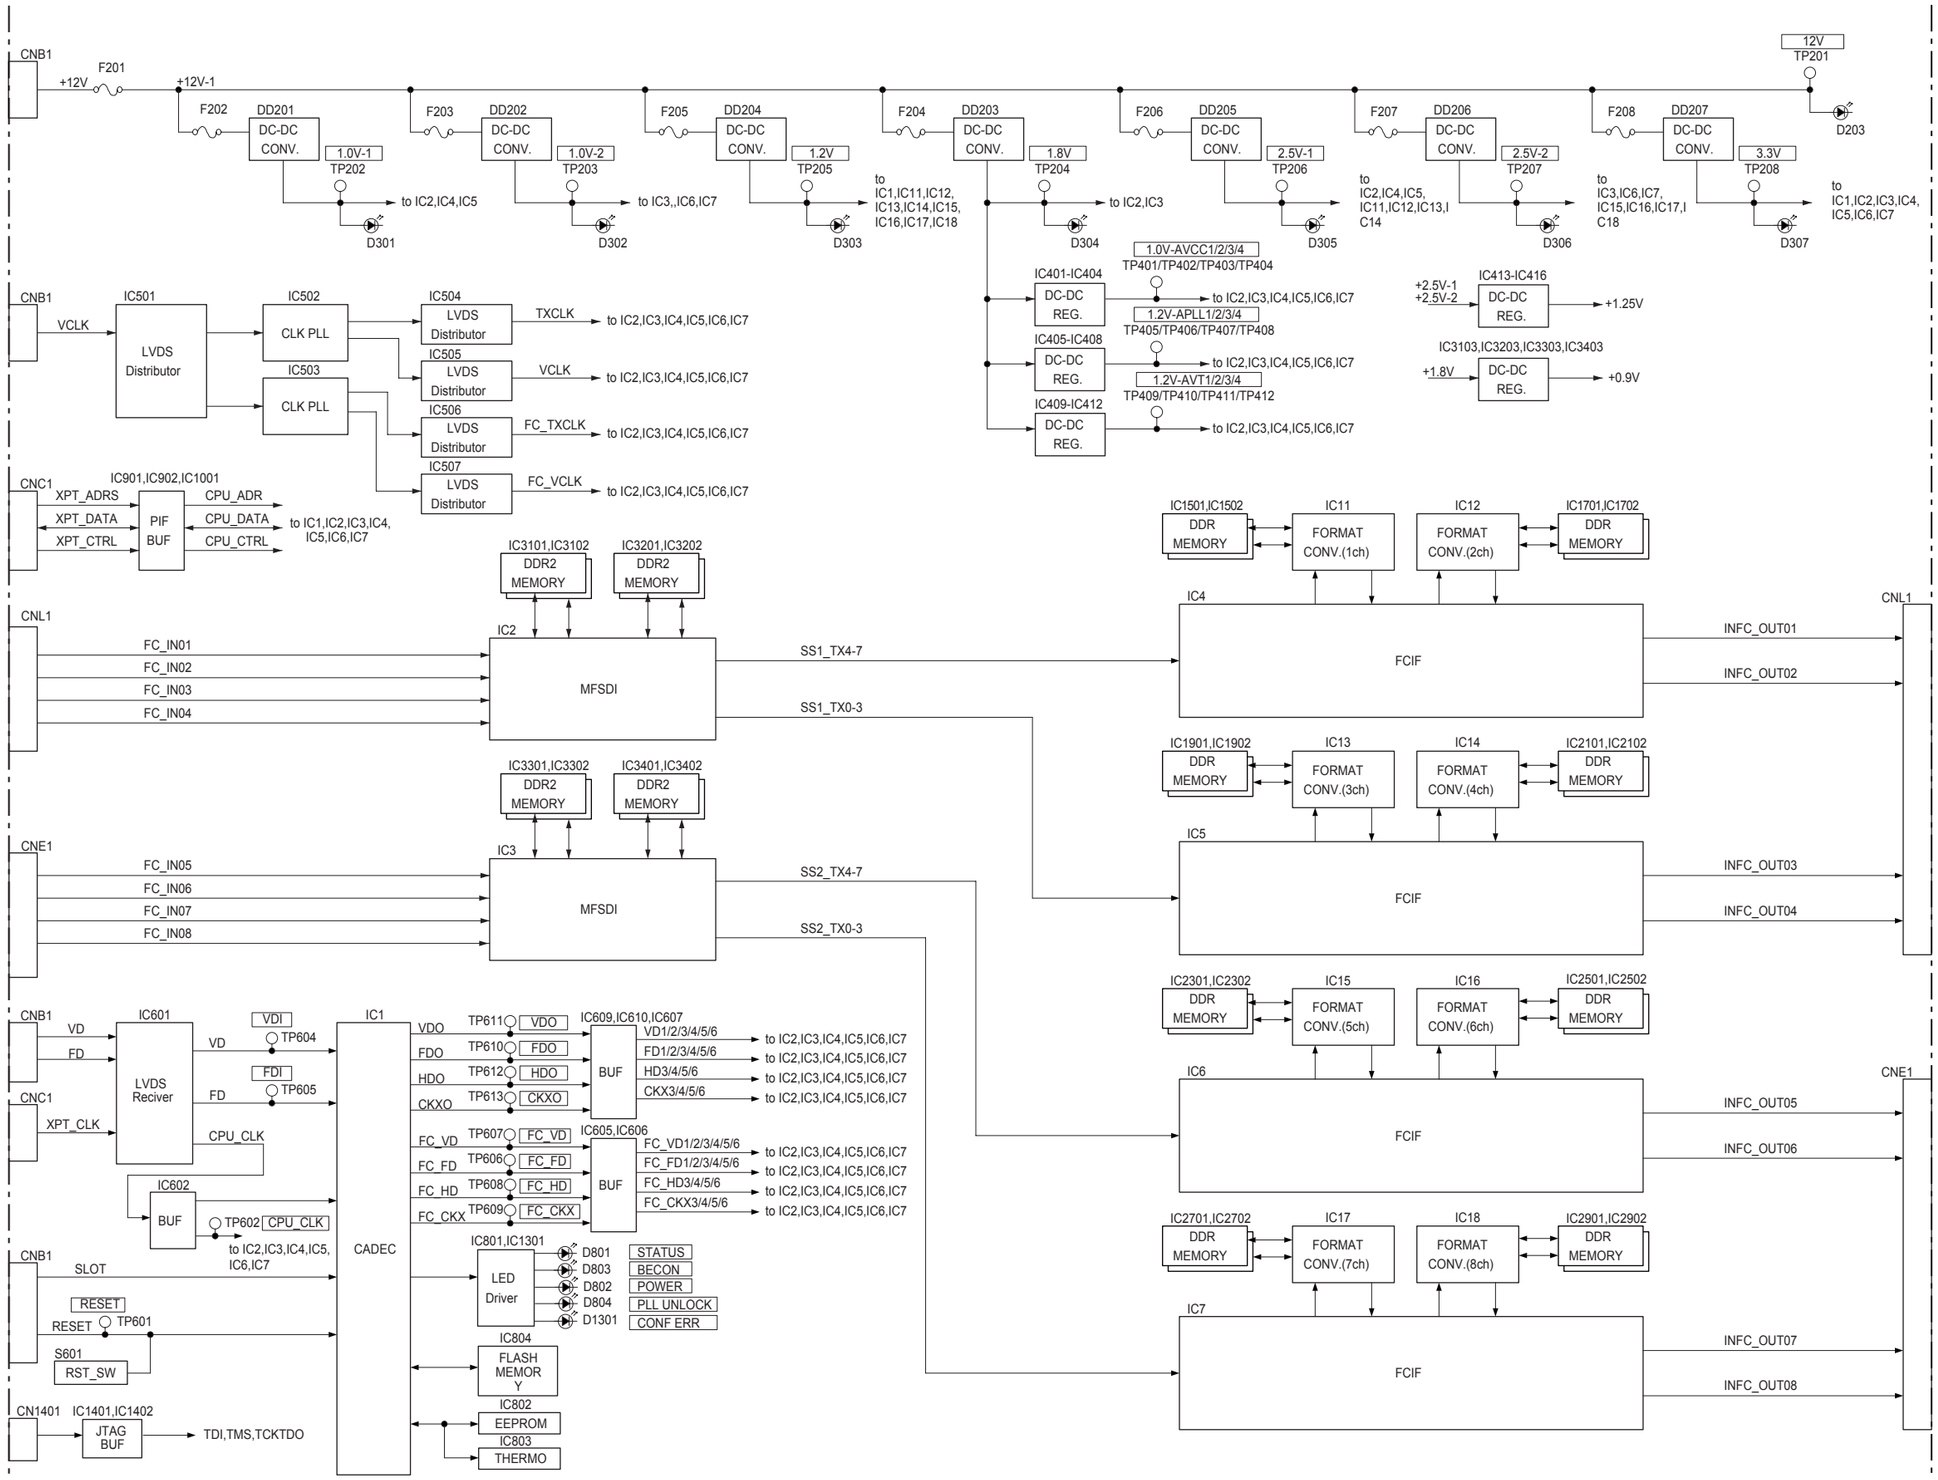

Format Converter Board
FC-112

MIX-53 (1/2) **SUFFIX: -13**

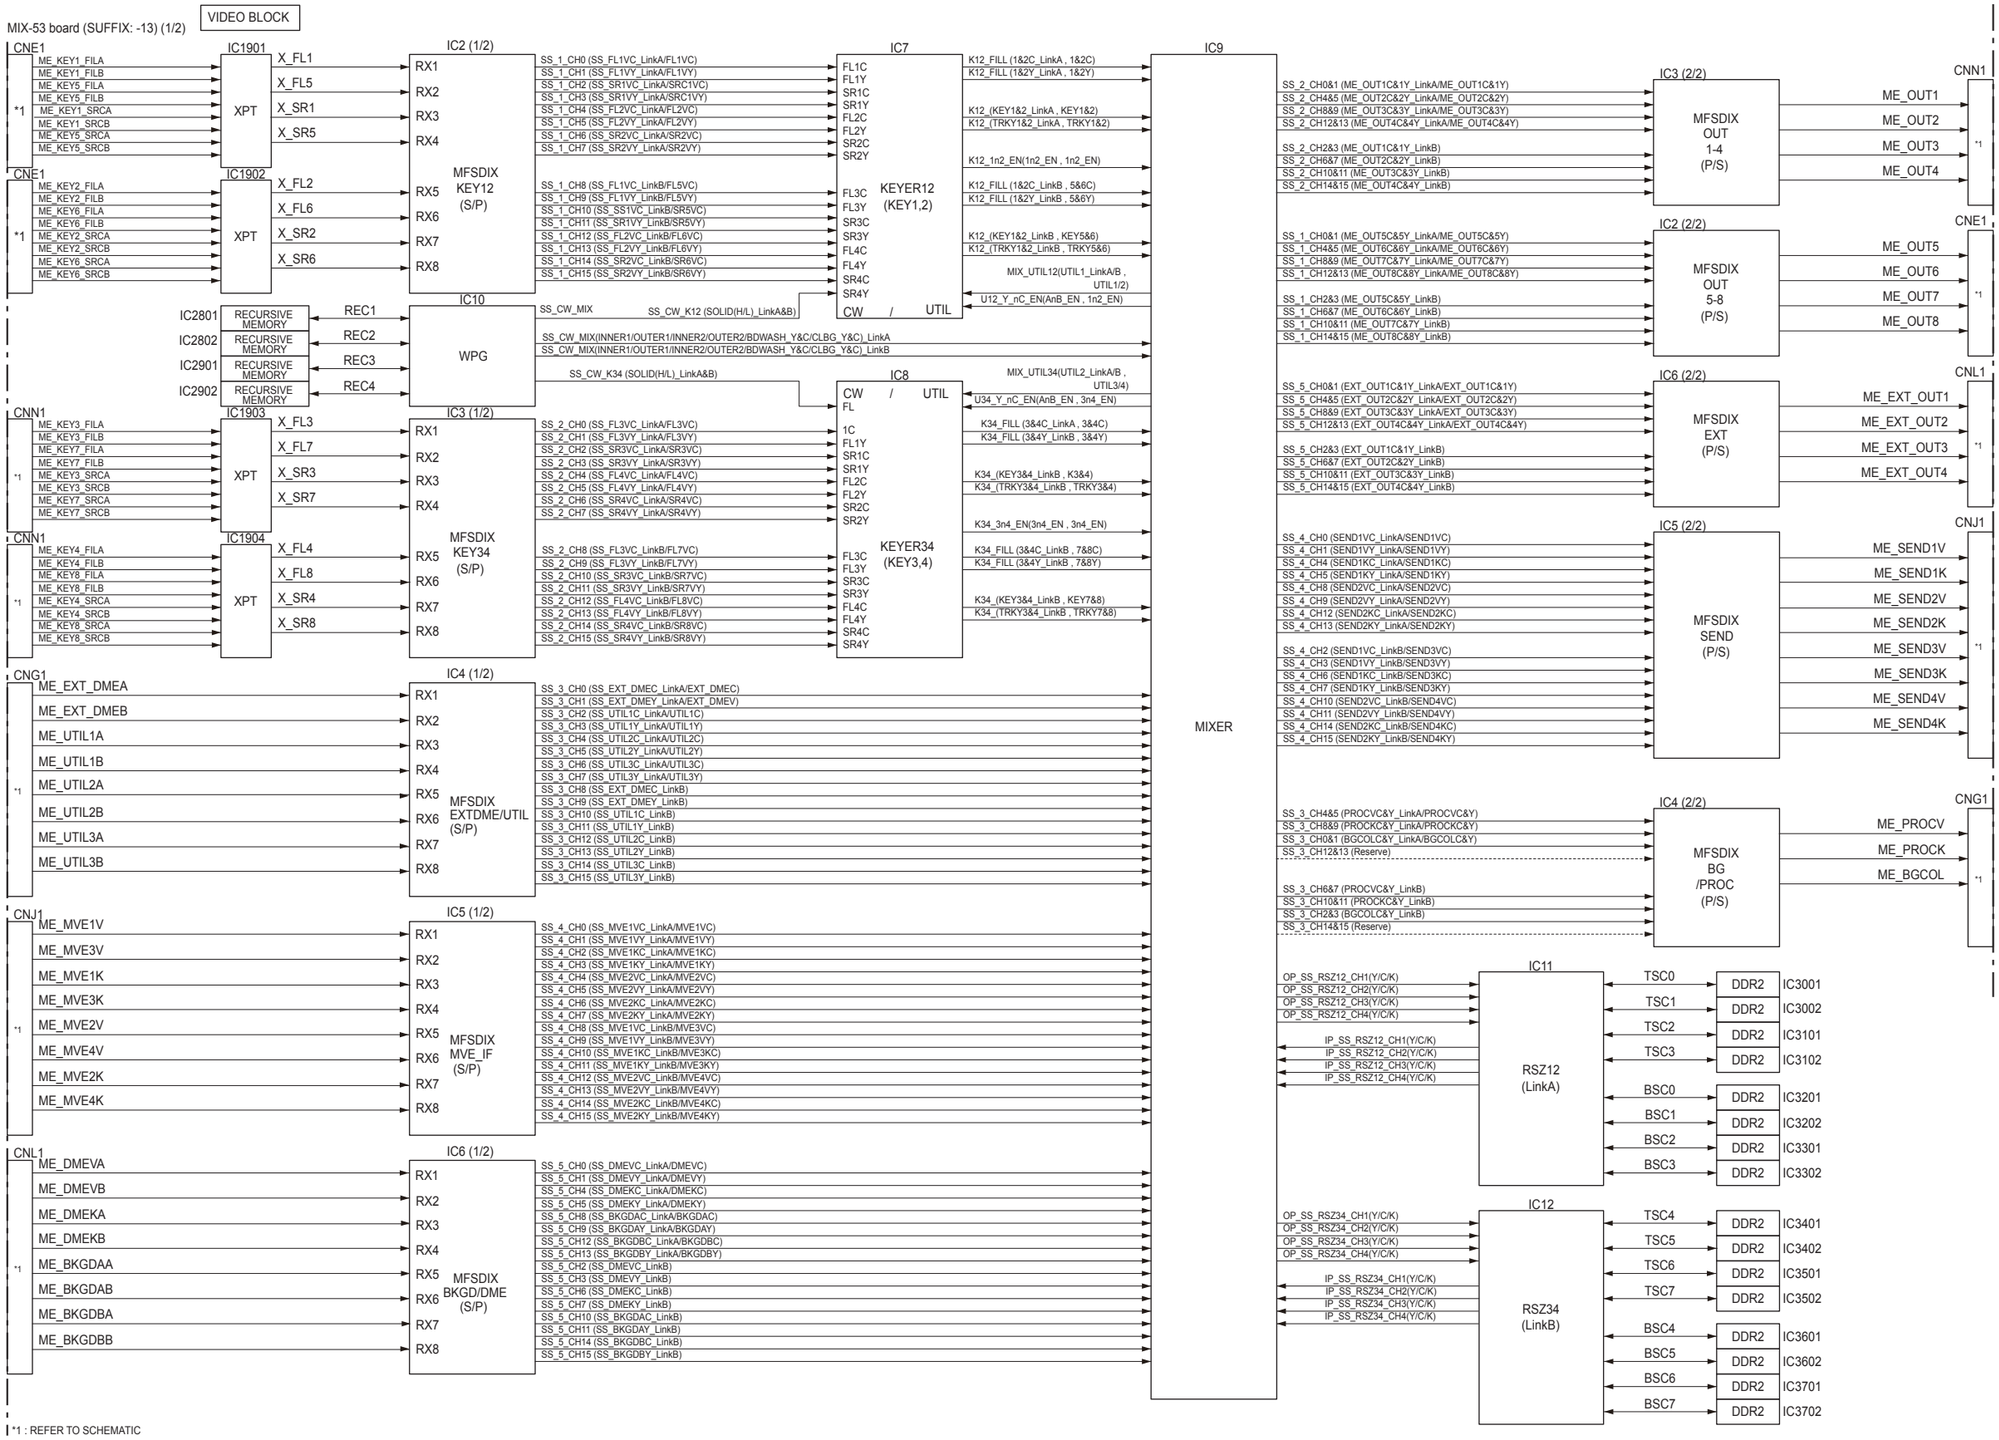

Mix/Effect Board

MIX-53 (1/2)

BOARD NO. 1-879-577-13

MIX-53 board (SUFFIX: -13) (2/2)

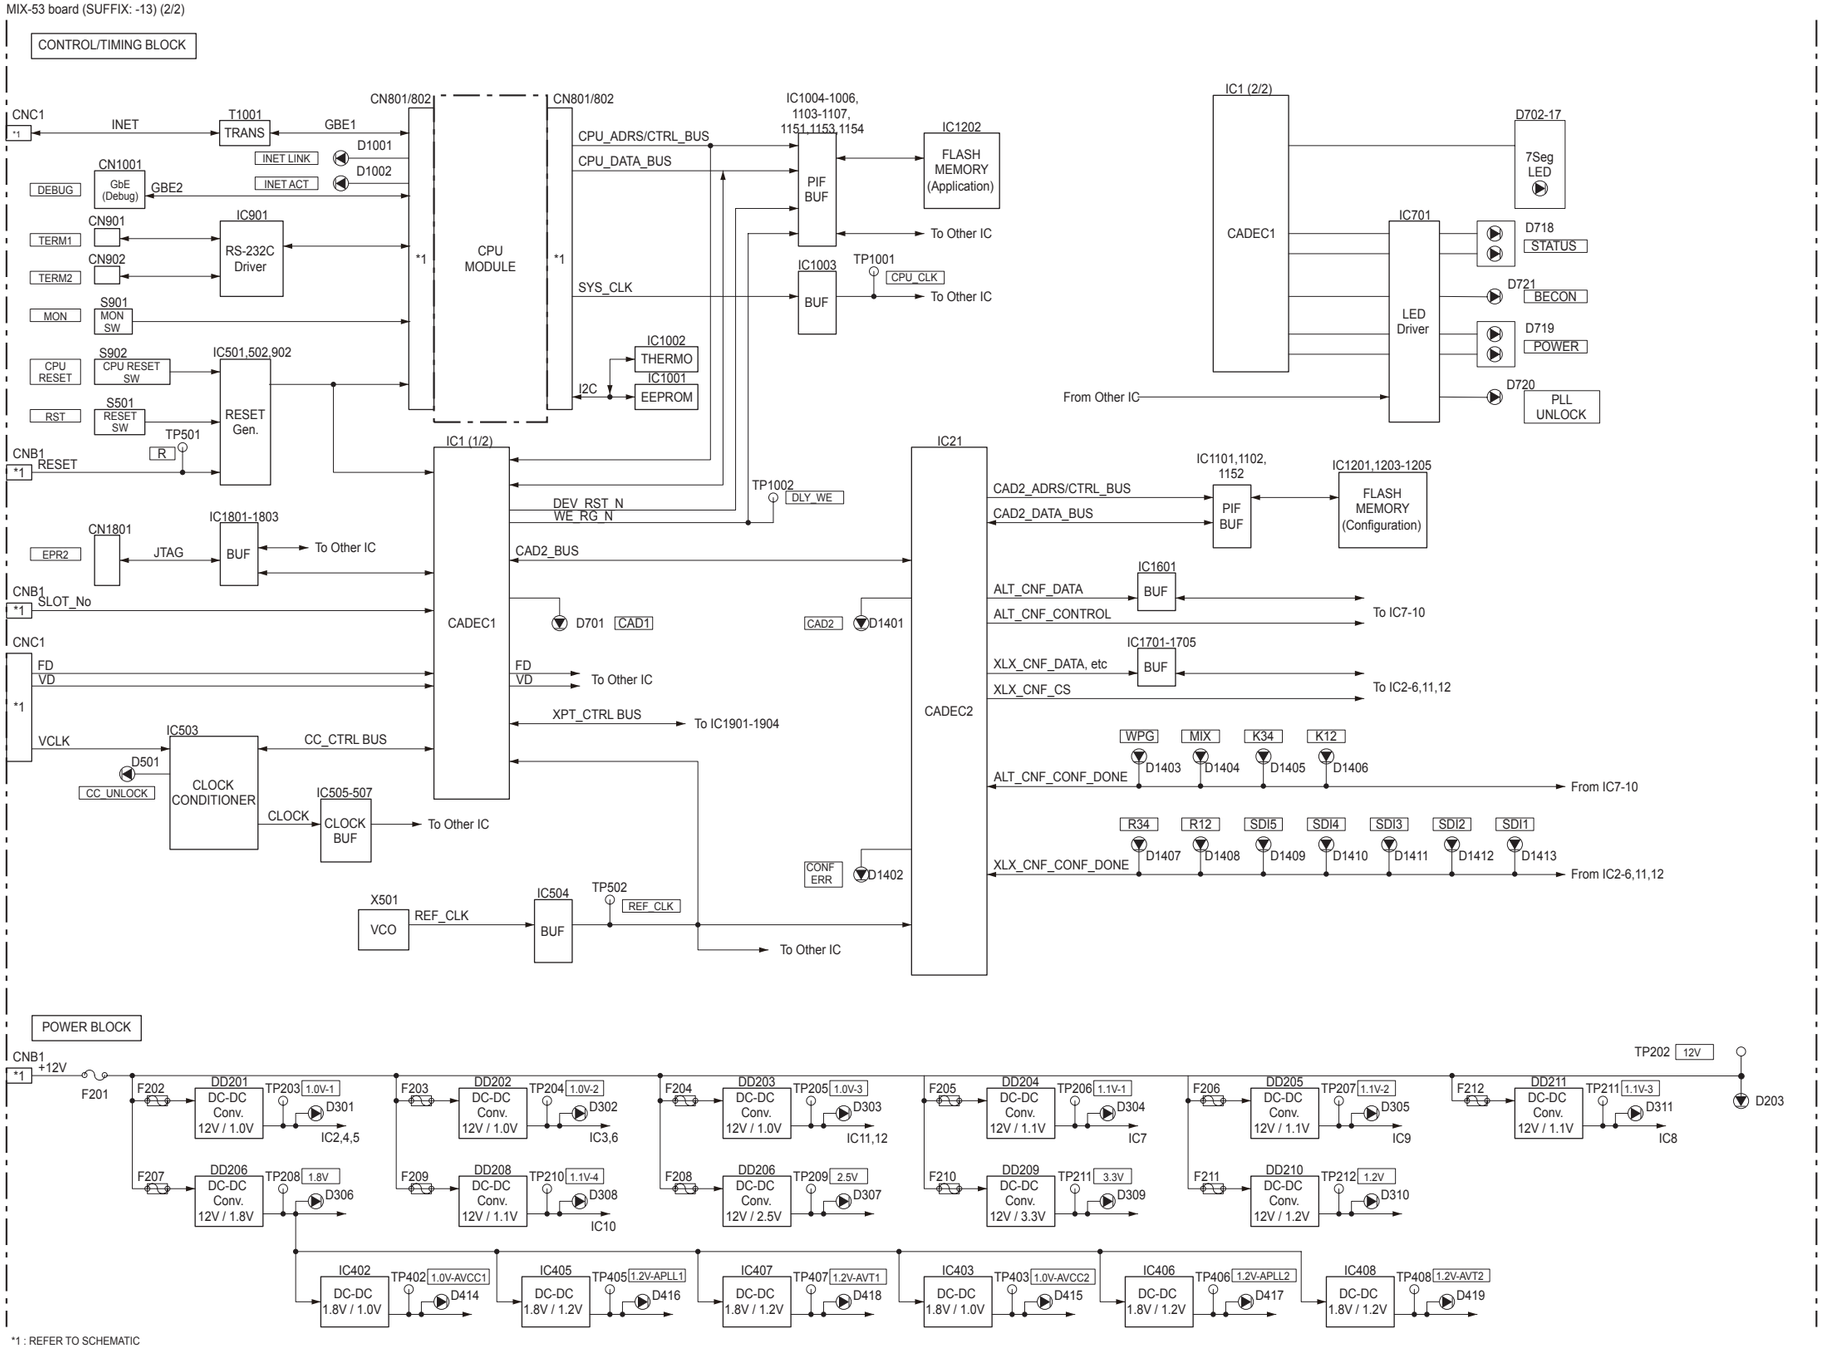

*1 : REFER TO SCHEMATIC

Mix/Effect Board
MIX-53 (2/2)
BOARD NO. 1-879-577-13

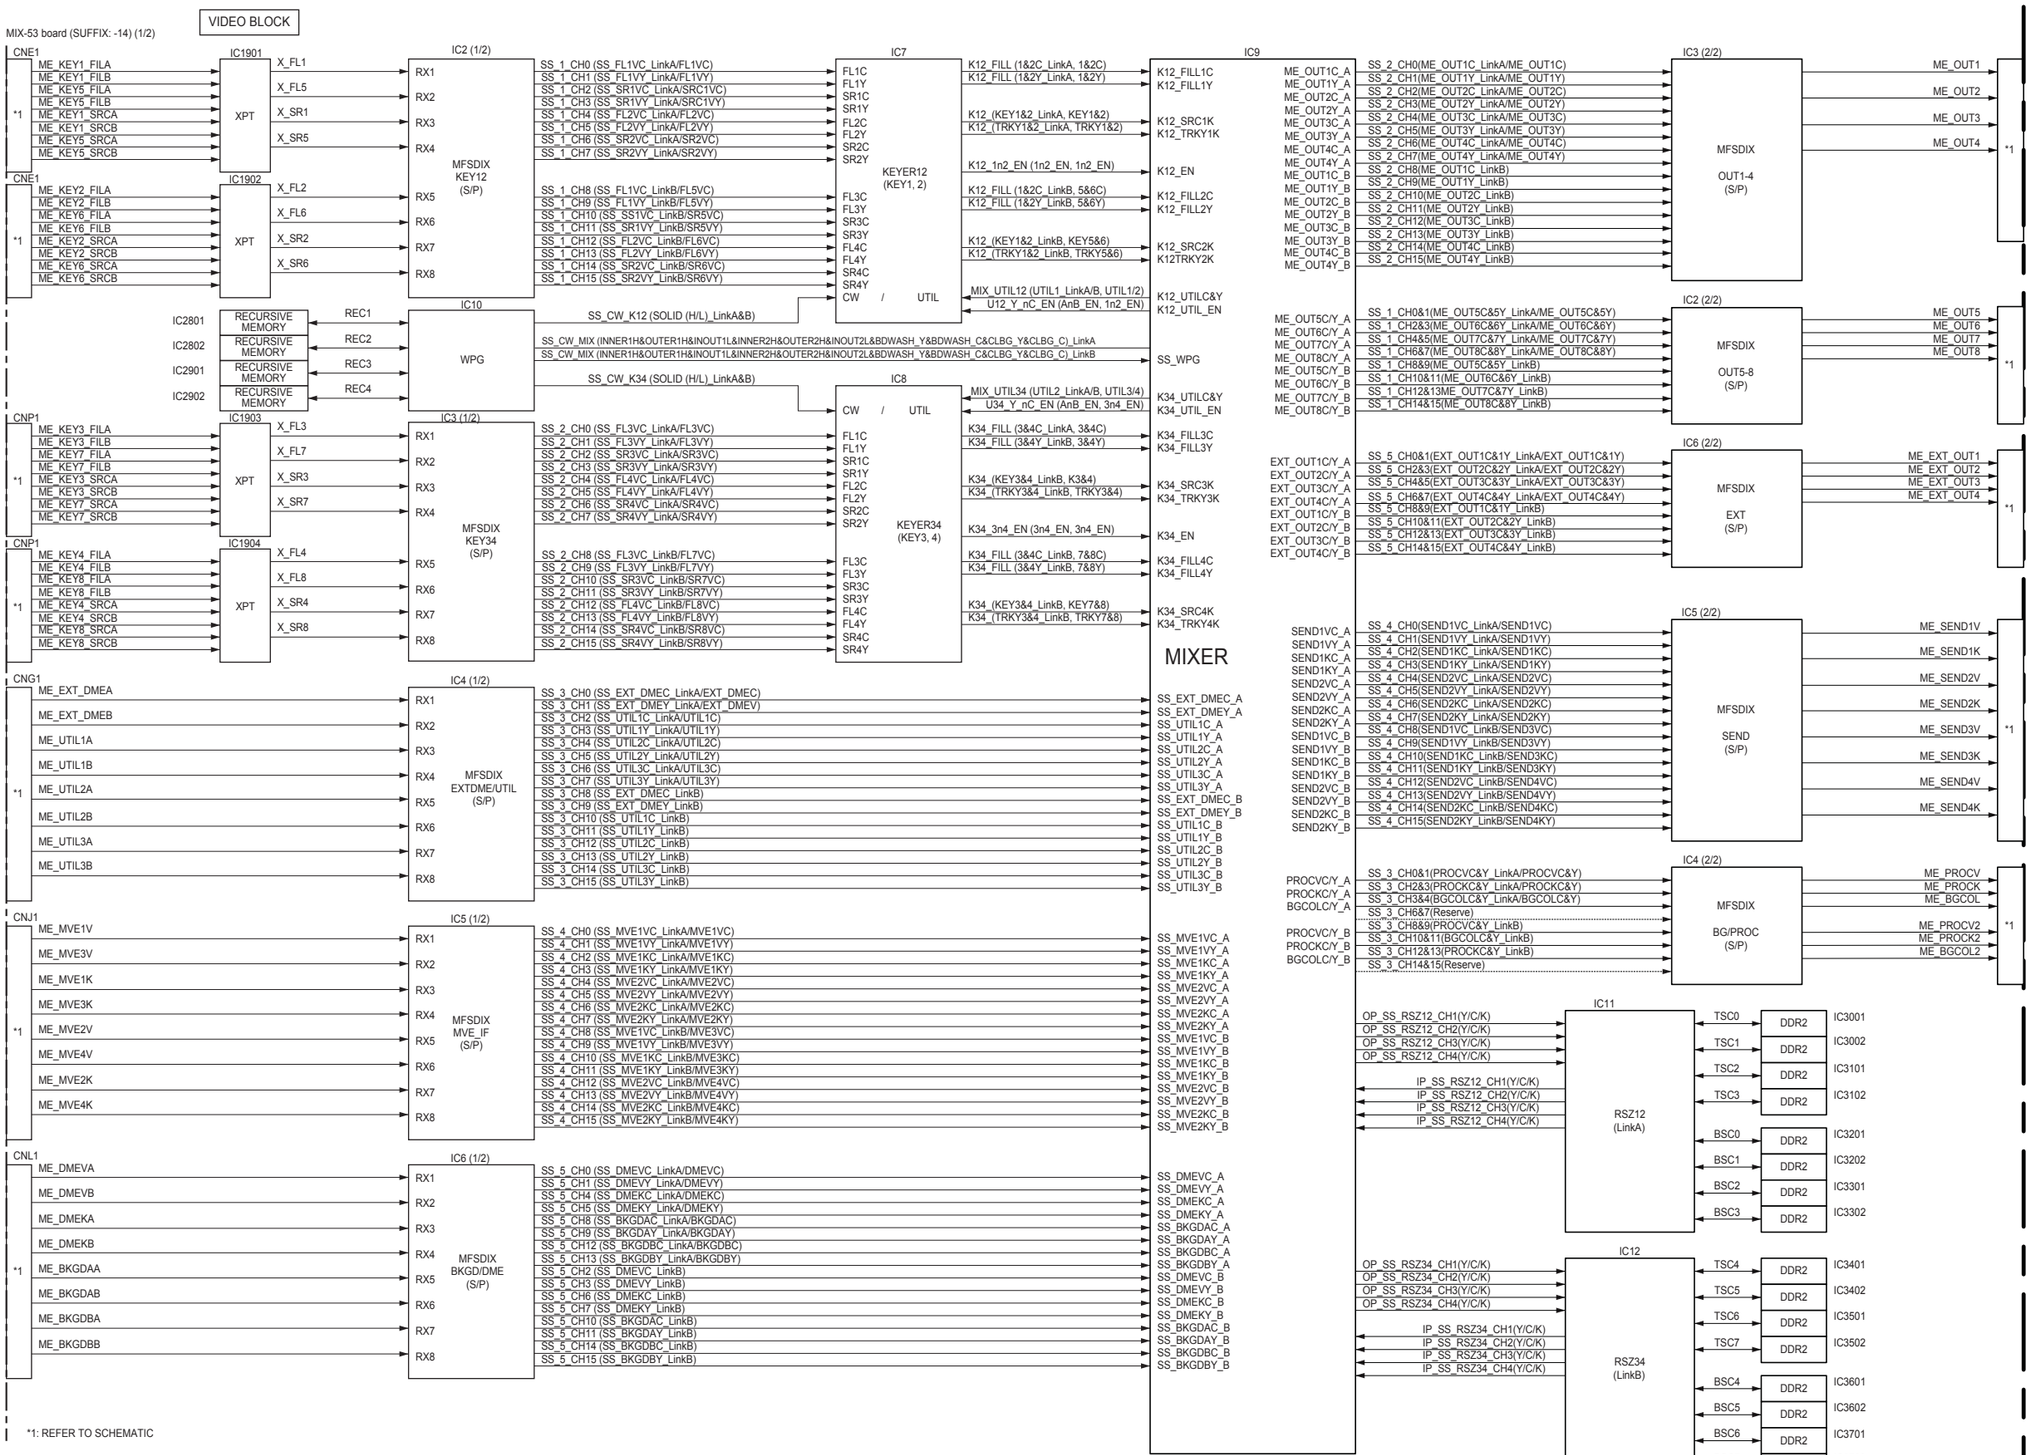
MIX-53 board (SUFFIX: -14) (1/2)
VIDEO BLOCK
CNE1
ME_KEY1_FILA
ME_KEY1_FILB
ME_KEY5_FILA
ME_KEY5_FILB
ME_KEY1_SRCA
ME_KEY1_SRCB
ME_KEY5_SRCA
ME_KEY5_SRCB
*1
IC1901
XPT
X_FL1
X_FL5
X_SR1
X_SR5
IC2 (1/2)
RX1
RX2
RX3
RX4
MFSDIX
KEY12
(S/P)
SS_1_CH0 (SS_FL1VC_LinkA/FL1VC)
SS_1_CH1 (SS_FL1VY_LinkA/FL1VY)
SS_1_CH2 (SS_SR1VC_LinkA/SRC1VC)
SS_1_CH3 (SS_SR1VY_LinkA/SRC1VY)
SS_1_CH4 (SS_FL2VC_LinkA/FL2VC)
SS_1_CH5 (SS_FL2VY_LinkA/FL2VY)
SS_1_CH6 (SS_SR2VC_LinkA/SR2VC)
SS_1_CH7 (SS_SR2VY_LinkA/SR2VY)
IC7
FL1C
FL1Y
SR1C
SR1Y
FL2C
FL2Y
SR2C
SR2Y
KEYER12
(KEY1, 2)
K12_FILL (1&2C_LinkA, 1&2C)
K12_FILL (1&2Y_LinkA, 1&2Y)
K12_(KEY1&2_LinkA, KEY1&2)
K12_(TRKY1&2_LinkA, TRKY1&2)
K12_1n2_EN (1n2_EN, 1n2_EN)
IC9
K12_FILL1C
K12_FILL1Y
K12_SRC1K
K12_TRKY1K
K12_EN
CNE1
ME_KEY2_FILA
ME_KEY2_FILB
ME_KEY6_FILA
ME_KEY6_FILB
ME_KEY2_SRCA
ME_KEY2_SRCB
ME_KEY6_SRCA
ME_KEY6_SRCB
*1
IC1902
XPT
X_FL2
X_FL6
X_SR2
X_SR6
RX5
RX6
RX7
RX8
SS_1_CH8 (SS_FL1VC_LinkB/FL5VC)
SS_1_CH9 (SS_FL1VY_LinkB/FL5VY)
SS_1_CH10 (SS_SS1VC_LinkB/SR5VC)
SS_1_CH11 (SS_SR1VY_LinkB/SR5VY)
SS_1_CH12 (SS_FL2VC_LinkB/FL6VC)
SS_1_CH13 (SS_FL2VY_LinkB/FL6VY)
SS_1_CH14 (SS_SR2VC_LinkB/SR6VC)
SS_1_CH15 (SS_SR2VY_LinkB/SR6VY)
FL3C
FL3Y
SR3C
SR3Y
FL4C
FL4Y
SR4C
SR4Y
CW / UTIL
K12_(KEY1&2_LinkB, KEY5&6)
K12_(TRKY1&2_LinkB, TRKY5&6)
K12_FILL (1&2C_LinkB, 5&6C)
K12_FILL (1&2Y_LinkB, 5&6Y)
K12_1n2_EN (1n2_EN, 1n2_EN)
K12_FILL2C
K12_FILL2Y
K12_SRC2K
K12TRKY2K
K12_UTILC&Y
K12_UTIL_EN
IC10
WPG
IC2801
IC2802
IC2901
IC2902
RECURSIVE MEMORY
REC1
REC2
REC3
REC4
SS_CW_K12 (SOLID (H/L)_LinkA&B)
SS_CW_MIX (INNER1H&OUTER1H&INOUT1L&INNER2H&OUTER2H&INOUT2L&BDWASH_Y&BDWASH_C&CLBG_Y&CLBG_C)_LinkA
SS_CW_MIX (INNER1H&OUTER1H&INOUT1L&INNER2H&OUTER2H&INOUT2L&BDWASH_Y&BDWASH_C&CLBG_Y&CLBG_C)_LinkB
SS_CW_K34 (SOLID (H/L)_LinkA&B)
SS_WPG
IC8
CW / UTIL
MIX_UTIL12 (UTIL1_LinkA/B, UTIL1/2)
U12_Y_nC_EN (AnB_EN, 1n2_EN)
MIX_UTIL34 (UTIL2_LinkA/B, UTIL3/4)
U34_Y_nC_EN (AnB_EN, 3n4_EN)
K34_UTILC&Y
K34_UTIL_EN
CNP1
ME_KEY3_FILA
ME_KEY3_FILB
ME_KEY7_FILA
ME_KEY7_FILB
ME_KEY3_SRCA
ME_KEY3_SRCB
ME_KEY7_SRCA
ME_KEY7_SRCB
*1
IC1903
XPT
X_FL3
X_FL7
X_SR3
X_SR7
IC3 (1/2)
RX1
RX2
RX3
RX4
MFSDIX
KEY34
(S/P)
SS_2_CH0 (SS_FL3VC_LinkA/FL3VC)
SS_2_CH1 (SS_FL3VY_LinkA/FL3VY)
SS_2_CH2 (SS_SR3VC_LinkA/SR3VC)
SS_2_CH3 (SS_SR3VY_LinkA/SR3VY)
SS_2_CH4 (SS_FL4VC_LinkA/FL4VC)
SS_2_CH5 (SS_FL4VY_LinkA/FL4VY)
SS_2_CH6 (SS_SR4VC_LinkA/SR4VC)
SS_2_CH7 (SS_SR4VY_LinkA/SR4VY)
KEYER34
(KEY3, 4)
K34_(KEY3&4_LinkB, K3&4)
K34_(TRKY3&4_LinkB, TRKY3&4)
K34_3n4_EN (3n4_EN, 3n4_EN)
K34_FILL3C
K34_FILL3Y
K34_SRC3K
K34_TRKY3K
K34_EN
CNP1
ME_KEY4_FILA
ME_KEY4_FILB
ME_KEY8_FILA
ME_KEY8_FILB
ME_KEY4_SRCA
ME_KEY4_SRCB
ME_KEY8_SRCA
ME_KEY8_SRCB
*1
IC1904
XPT
X_FL4
X_FL8
X_SR4
X_SR8
RX5
RX6
RX7
RX8
SS_2_CH8 (SS_FL3VC_LinkB/FL7VC)
SS_2_CH9 (SS_FL3VY_LinkB/FL7VY)
SS_2_CH10 (SS_SR3VC_LinkB/SR7VC)
SS_2_CH11 (SS_SR3VY_LinkB/SR7VY)
SS_2_CH12 (SS_FL4VC_LinkB/FL8VC)
SS_2_CH13 (SS_FL4VY_LinkB/FL8VY)
SS_2_CH14 (SS_SR4VC_LinkB/SR8VC)
SS_2_CH15 (SS_SR4VY_LinkB/SR8VY)
FL3C
FL3Y
SR3C
SR3Y
FL4C
FL4Y
SR4C
SR4Y
K34_(KEY3&4_LinkB, KEY7&8)
K34_(TRKY3&4_LinkB, TRKY7&8)
K34_FILL (3&4C_LinkB, 7&8C)
K34_FILL (3&4Y_LinkB, 7&8Y)
K34_FILL4C
K34_FILL4Y
K34_SRC4K
K34_TRKY4K
MIXER
CNG1
ME_EXT_DMEA
ME_EXT_DMEB
ME_UTIL1A
ME_UTIL1B
ME_UTIL2A
ME_UTIL2B
ME_UTIL3A
ME_UTIL3B
*1
IC4 (1/2)
RX1
RX2
RX3
RX4
RX5
RX6
RX7
RX8
MFSDIX
EXTDME/UTIL
(S/P)
SS_3_CH0 (SS_EXT_DMEC_LinkA/EXT_DMEC)
SS_3_CH1 (SS_EXT_DMEY_LinkA/EXT_DMEV)
SS_3_CH2 (SS_UTIL1C_LinkA/UTIL1C)
SS_3_CH3 (SS_UTIL1Y_LinkA/UTIL1Y)
SS_3_CH4 (SS_UTIL2C_LinkA/UTIL2C)
SS_3_CH5 (SS_UTIL2Y_LinkA/UTIL2Y)
SS_3_CH6 (SS_UTIL3C_LinkA/UTIL3C)
SS_3_CH7 (SS_UTIL3Y_LinkA/UTIL3Y)
SS_3_CH8 (SS_EXT_DMEC_LinkB)
SS_3_CH9 (SS_EXT_DMEY_LinkB)
SS_3_CH10 (SS_UTIL1C_LinkB)
SS_3_CH11 (SS_UTIL1Y_LinkB)
SS_3_CH12 (SS_UTIL2C_LinkB)
SS_3_CH13 (SS_UTIL2Y_LinkB)
SS_3_CH14 (SS_UTIL3C_LinkB)
SS_3_CH15 (SS_UTIL3Y_LinkB)
SS_EXT_DMEC_A
SS_EXT_DMEY_A
SS_UTIL1C_A
SS_UTIL1Y_A
SS_UTIL2C_A
SS_UTIL2Y_A
SS_UTIL3C_A
SS_UTIL3Y_A
SS_EXT_DMEC_B
SS_EXT_DMEY_B
SS_UTIL1C_B
SS_UTIL1Y_B
SS_UTIL2C_B
SS_UTIL2Y_B
SS_UTIL3C_B
SS_UTIL3Y_B
CNJ1
ME_MVE1V
ME_MVE3V
ME_MVE1K
ME_MVE3K
ME_MVE2V
ME_MVE4V
ME_MVE2K
ME_MVE4K
*1
IC5 (1/2)
RX1
RX2
RX3
RX4
RX5
RX6
RX7
RX8
MFSDIX
MVE_IF
(S/P)
SS_4_CH0 (SS_MVE1VC_LinkA/MVE1VC)
SS_4_CH1 (SS_MVE1VY_LinkA/MVE1VY)
SS_4_CH2 (SS_MVE1KC_LinkA/MVE1KC)
SS_4_CH3 (SS_MVE1KY_LinkA/MVE1KY)
SS_4_CH4 (SS_MVE2VC_LinkA/MVE2VC)
SS_4_CH5 (SS_MVE2VY_LinkA/MVE2VY)
SS_4_CH6 (SS_MVE2KC_LinkA/MVE2KC)
SS_4_CH7 (SS_MVE2KY_LinkA/MVE2KY)
SS_4_CH8 (SS_MVE1VC_LinkB/MVE3VC)
SS_4_CH9 (SS_MVE1VY_LinkB/MVE3VY)
SS_4_CH10 (SS_MVE1KC_LinkB/MVE3KC)
SS_4_CH11 (SS_MVE1KY_LinkB/MVE3KY)
SS_4_CH12 (SS_MVE2VC_LinkB/MVE4VC)
SS_4_CH13 (SS_MVE2VY_LinkB/MVE4VY)
SS_4_CH14 (SS_MVE2KC_LinkB/MVE4KC)
SS_4_CH15 (SS_MVE2KY_LinkB/MVE4KY)
SS_MVE1VC_A
SS_MVE1VY_A
SS_MVE1KC_A
SS_MVE1KY_A
SS_MVE2VC_A
SS_MVE2VY_A
SS_MVE2KC_A
SS_MVE2KY_A
SS_MVE1VC_B
SS_MVE1VY_B
SS_MVE1KC_B
SS_MVE1KY_B
SS_MVE2VC_B
SS_MVE2VY_B
SS_MVE2KC_B
SS_MVE2KY_B
CNL1
ME_DMEVA
ME_DMEVB
ME_DMEKA
ME_DMEKB
ME_BKGDAA
ME_BKGDAB
ME_BKGDBA
ME_BKGDBB
*1
IC6 (1/2)
RX1
RX2
RX3
RX4
RX5
RX6
RX7
RX8
MFSDIX
BKGD/DME
(S/P)
SS_5_CH0 (SS_DMEVC_LinkA/DMEVC)
SS_5_CH1 (SS_DMEVY_LinkA/DMEVY)
SS_5_CH4 (SS_DMEKC_LinkA/DMEKC)
SS_5_CH5 (SS_DMEKY_LinkA/DMEKY)
SS_5_CH8 (SS_BKGDAC_LinkA/BKGDAC)
SS_5_CH9 (SS_BKGDAY_LinkA/BKGDAY)
SS_5_CH12 (SS_BKGDBC_LinkA/BKGDBC)
SS_5_CH13 (SS_BKGDBY_LinkA/BKGDBY)
SS_5_CH2 (SS_DMEVC_LinkB)
SS_5_CH3 (SS_DMEVY_LinkB)
SS_5_CH6 (SS_DMEKC_LinkB)
SS_5_CH7 (SS_DMEKY_LinkB)
SS_5_CH10 (SS_BKGDAC_LinkB)
SS_5_CH11 (SS_BKGDAY_LinkB)
SS_5_CH14 (SS_BKGDBC_LinkB)
SS_5_CH15 (SS_BKGDBY_LinkB)
SS_DMEVC_A
SS_DMEVY_A
SS_DMEKC_A
SS_DMEKY_A
SS_BKGDAC_A
SS_BKGDAY_A
SS_BKGDBC_A
SS_BKGDBY_A
SS_DMEVC_B
SS_DMEVY_B
SS_DMEKC_B
SS_DMEKY_B
SS_BKGDAC_B
SS_BKGDAY_B
SS_BKGDBC_B
SS_BKGDBY_B
*1: REFER TO SCHEMATIC
IC9
ME_OUT1C_A
ME_OUT1Y_A
ME_OUT2C_A
ME_OUT2Y_A
ME_OUT3C_A
ME_OUT3Y_A
ME_OUT4C_A
ME_OUT4Y_A
ME_OUT1C_B
ME_OUT1Y_B
ME_OUT2C_B
ME_OUT2Y_B
ME_OUT3C_B
ME_OUT3Y_B
ME_OUT4C_B
ME_OUT4Y_B
SS_2_CH0(ME_OUT1C_LinkA/ME_OUT1C)
SS_2_CH1(ME_OUT1Y_LinkA/ME_OUT1Y)
SS_2_CH2(ME_OUT2C_LinkA/ME_OUT2C)
SS_2_CH3(ME_OUT2Y_LinkA/ME_OUT2Y)
SS_2_CH4(ME_OUT3C_LinkA/ME_OUT3C)
SS_2_CH5(ME_OUT3Y_LinkA/ME_OUT3Y)
SS_2_CH6(ME_OUT4C_LinkA/ME_OUT4C)
SS_2_CH7(ME_OUT4Y_LinkA/ME_OUT4Y)
SS_2_CH8(ME_OUT1C_LinkB)
SS_2_CH9(ME_OUT1Y_LinkB)
SS_2_CH10(ME_OUT2C_LinkB)
SS_2_CH11(ME_OUT2Y_LinkB)
SS_2_CH12(ME_OUT3C_LinkB)
SS_2_CH13(ME_OUT3Y_LinkB)
SS_2_CH14(ME_OUT4C_LinkB)
SS_2_CH15(ME_OUT4Y_LinkB)
IC3 (2/2)
MFSDIX
OUT1-4
(S/P)
ME_OUT1
ME_OUT2
ME_OUT3
ME_OUT4
*1
ME_OUT5C/Y_A
ME_OUT6C/Y_A
ME_OUT7C/Y_A
ME_OUT8C/Y_A
ME_OUT5C/Y_B
ME_OUT6C/Y_B
ME_OUT7C/Y_B
ME_OUT8C/Y_B
SS_1_CH0&1(ME_OUT5C&5Y_LinkA/ME_OUT5C&5Y)
SS_1_CH2&3(ME_OUT6C&6Y_LinkA/ME_OUT6C&6Y)
SS_1_CH4&5(ME_OUT7C&7Y_LinkA/ME_OUT7C&7Y)
SS_1_CH6&7(ME_OUT8C&8Y_LinkA/ME_OUT8C&8Y)
SS_1_CH8&9(ME_OUT5C&5Y_LinkB)
SS_1_CH10&11(ME_OUT6C&6Y_LinkB)
SS_1_CH12&13ME_OUT7C&7Y_LinkB)
SS_1_CH14&15(ME_OUT8C&8Y_LinkB)
IC2 (2/2)
MFSDIX
OUT5-8
(S/P)
ME_OUT5
ME_OUT6
ME_OUT7
ME_OUT8
*1
EXT_OUT1C/Y_A
EXT_OUT2C/Y_A
EXT_OUT3C/Y_A
EXT_OUT4C/Y_A
EXT_OUT1C/Y_B
EXT_OUT2C/Y_B
EXT_OUT3C/Y_B
EXT_OUT4C/Y_B
SS_5_CH0&1(EXT_OUT1C&1Y_LinkA/EXT_OUT1C&1Y)
SS_5_CH2&3(EXT_OUT2C&2Y_LinkA/EXT_OUT2C&2Y)
SS_5_CH4&5(EXT_OUT3C&3Y_LinkA/EXT_OUT3C&3Y)
SS_5_CH6&7(EXT_OUT4C&4Y_LinkA/EXT_OUT4C&4Y)
SS_5_CH8&9(EXT_OUT1C&1Y_LinkB)
SS_5_CH10&11(EXT_OUT2C&2Y_LinkB)
SS_5_CH12&13(EXT_OUT3C&3Y_LinkB)
SS_5_CH14&15(EXT_OUT4C&4Y_LinkB)
IC6 (2/2)
MFSDIX
EXT
(S/P)
ME_EXT_OUT1
ME_EXT_OUT2
ME_EXT_OUT3
ME_EXT_OUT4
*1
SEND1VC_A
SEND1VY_A
SEND1KC_A
SEND1KY_A
SEND2VC_A
SEND2VY_A
SEND2KC_A
SEND2KY_A
SEND1VC_B
SEND1VY_B
SEND1KC_B
SEND1KY_B
SEND2VC_B
SEND2VY_B
SEND2KC_B
SEND2KY_B
SS_4_CH0(SEND1VC_LinkA/SEND1VC)
SS_4_CH1(SEND1VY_LinkA/SEND1VY)
SS_4_CH2(SEND1KC_LinkA/SEND1KC)
SS_4_CH3(SEND1KY_LinkA/SEND1KY)
SS_4_CH4(SEND2VC_LinkA/SEND2VC)
SS_4_CH5(SEND2VY_LinkA/SEND2VY)
SS_4_CH6(SEND2KC_LinkA/SEND2KC)
SS_4_CH7(SEND2KY_LinkA/SEND2KY)
SS_4_CH8(SEND1VC_LinkB/SEND3VC)
SS_4_CH9(SEND1VY_LinkB/SEND3VY)
SS_4_CH10(SEND1KC_LinkB/SEND3KC)
SS_4_CH11(SEND1KY_LinkB/SEND3KY)
SS_4_CH12(SEND2VC_LinkB/SEND4VC)
SS_4_CH13(SEND2VY_LinkB/SEND4VY)
SS_4_CH14(SEND2KC_LinkB/SEND4KC)
SS_4_CH15(SEND2KY_LinkB/SEND4KY)
IC5 (2/2)
MFSDIX
SEND
(S/P)
ME_SEND1V
ME_SEND1K
ME_SEND2V
ME_SEND2K
ME_SEND3V
ME_SEND3K
ME_SEND4V
ME_SEND4K
*1
PROCVC/Y_A
PROCKC/Y_A
BGCOLC/Y_A
PROCVC/Y_B
PROCKC/Y_B
BGCOLC/Y_B
SS_3_CH0&1(PROCVC&Y_LinkA/PROCVC&Y)
SS_3_CH2&3(PROCKC&Y_LinkA/PROCKC&Y)
SS_3_CH3&4(BGCOLC&Y_LinkA/BGCOLC&Y)
SS_3_CH6&7(Reserve)
SS_3_CH8&9(PROCVC&Y_LinkB)
SS_3_CH10&11(BGCOLC&Y_LinkB)
SS_3_CH12&13(PROCKC&Y_LinkB)
SS_3_CH14&15(Reserve)
IC4 (2/2)
MFSDIX
BG/PROC
(S/P)
ME_PROCV
ME_PROCK
ME_BGCOL
ME_PROCV2
ME_PROCK2
ME_BGCOL2
*1
IC11
OP_SS_RSZ12_CH1(Y/C/K)
OP_SS_RSZ12_CH2(Y/C/K)
OP_SS_RSZ12_CH3(Y/C/K)
OP_SS_RSZ12_CH4(Y/C/K)
IP_SS_RSZ12_CH1(Y/C/K)
IP_SS_RSZ12_CH2(Y/C/K)
IP_SS_RSZ12_CH3(Y/C/K)
IP_SS_RSZ12_CH4(Y/C/K)
RSZ12
(LinkA)
TSC0
TSC1
TSC2
TSC3
BSC0
BSC1
BSC2
BSC3
DDR2
IC3001
IC3002
IC3101
IC3102
IC3201
IC3202
IC3301
IC3302
IC12
OP_SS_RSZ34_CH1(Y/C/K)
OP_SS_RSZ34_CH2(Y/C/K)
OP_SS_RSZ34_CH3(Y/C/K)
OP_SS_RSZ34_CH4(Y/C/K)
IP_SS_RSZ34_CH1(Y/C/K)
IP_SS_RSZ34_CH2(Y/C/K)
IP_SS_RSZ34_CH3(Y/C/K)
IP_SS_RSZ34_CH4(Y/C/K)
RSZ34
(LinkB)
TSC4
TSC5
TSC6
TSC7
BSC4
BSC5
BSC6
BSC7
DDR2
IC3401
IC3402
IC3501
IC3502
IC3601
IC3602
IC3701
IC3702
Mix/Effect Board
MIX-53 (1/2)
BOARD NO. 1-879-577-14

MIX-53 board (SUFFIX: -14) (2/2)

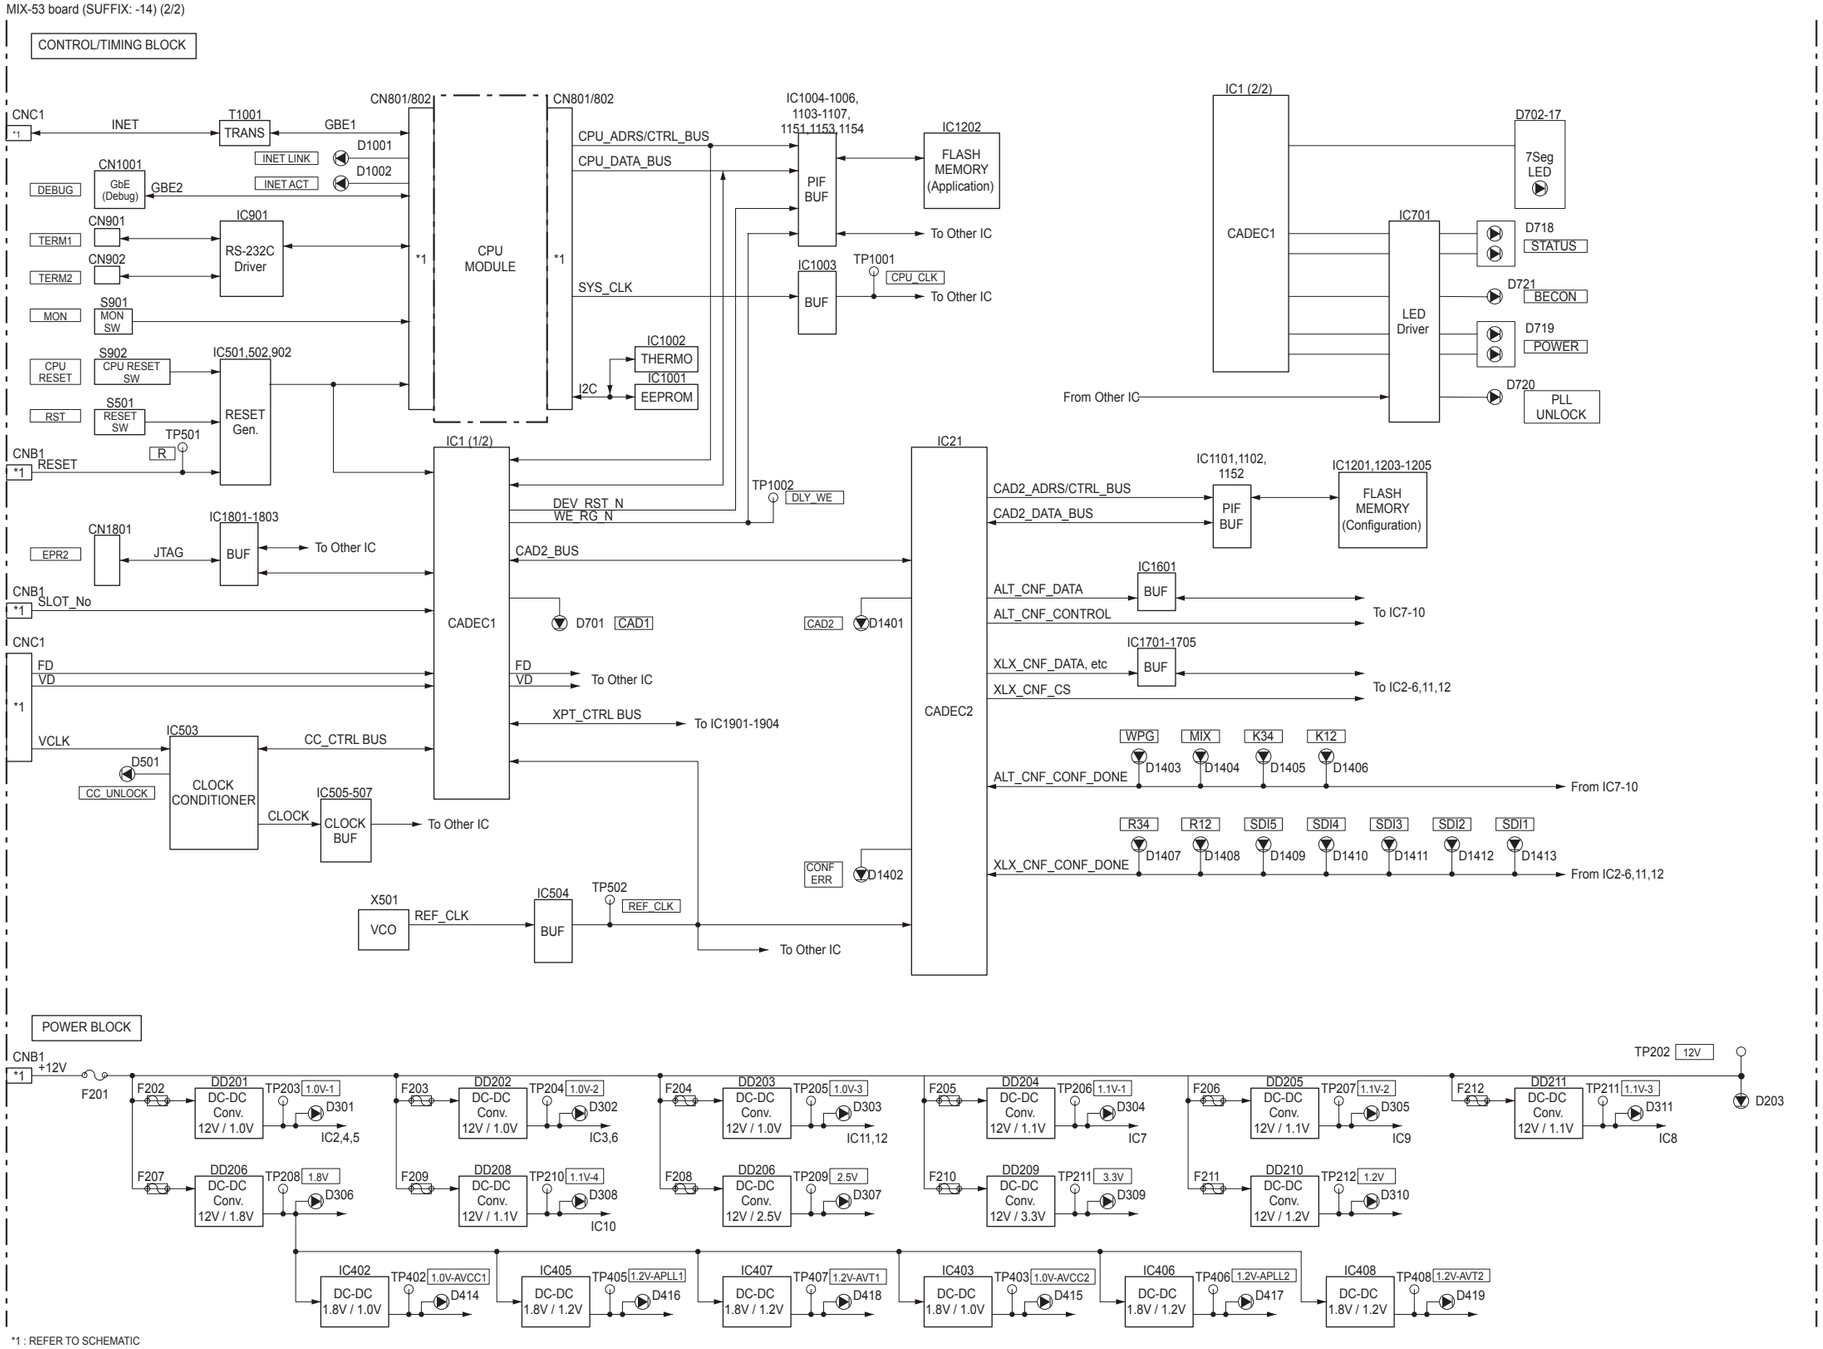

*1 : REFER TO SCHEMATIC

Mix/Effect Board
MIX-53 (2/2)
BOARD NO. 1-879-577-14

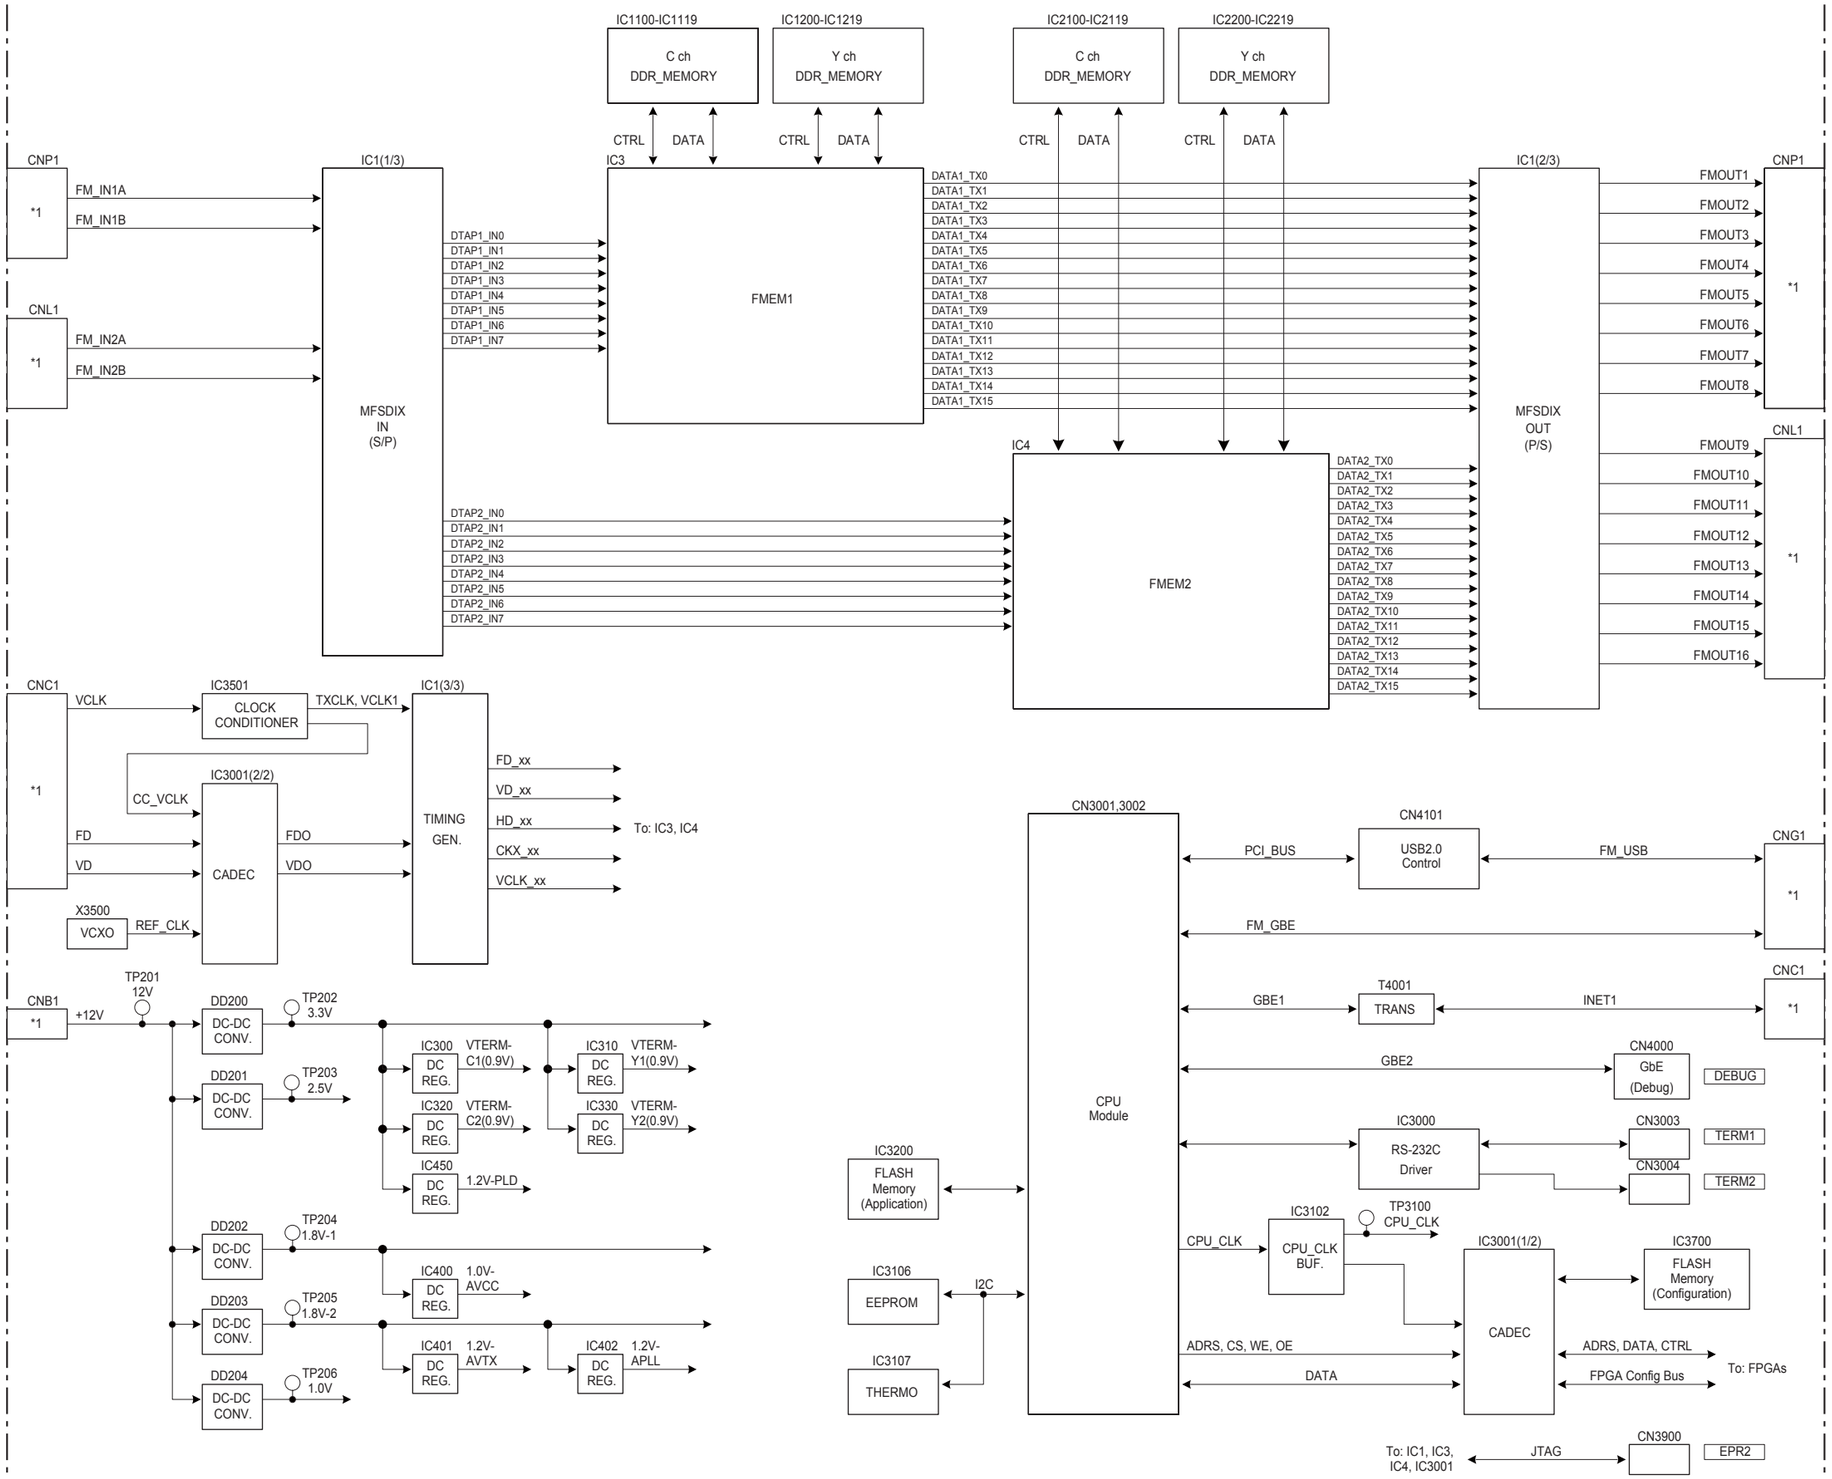

Frame Memory Board
MY-118

OUT-35 (1/2), OUT-35A (1/2)

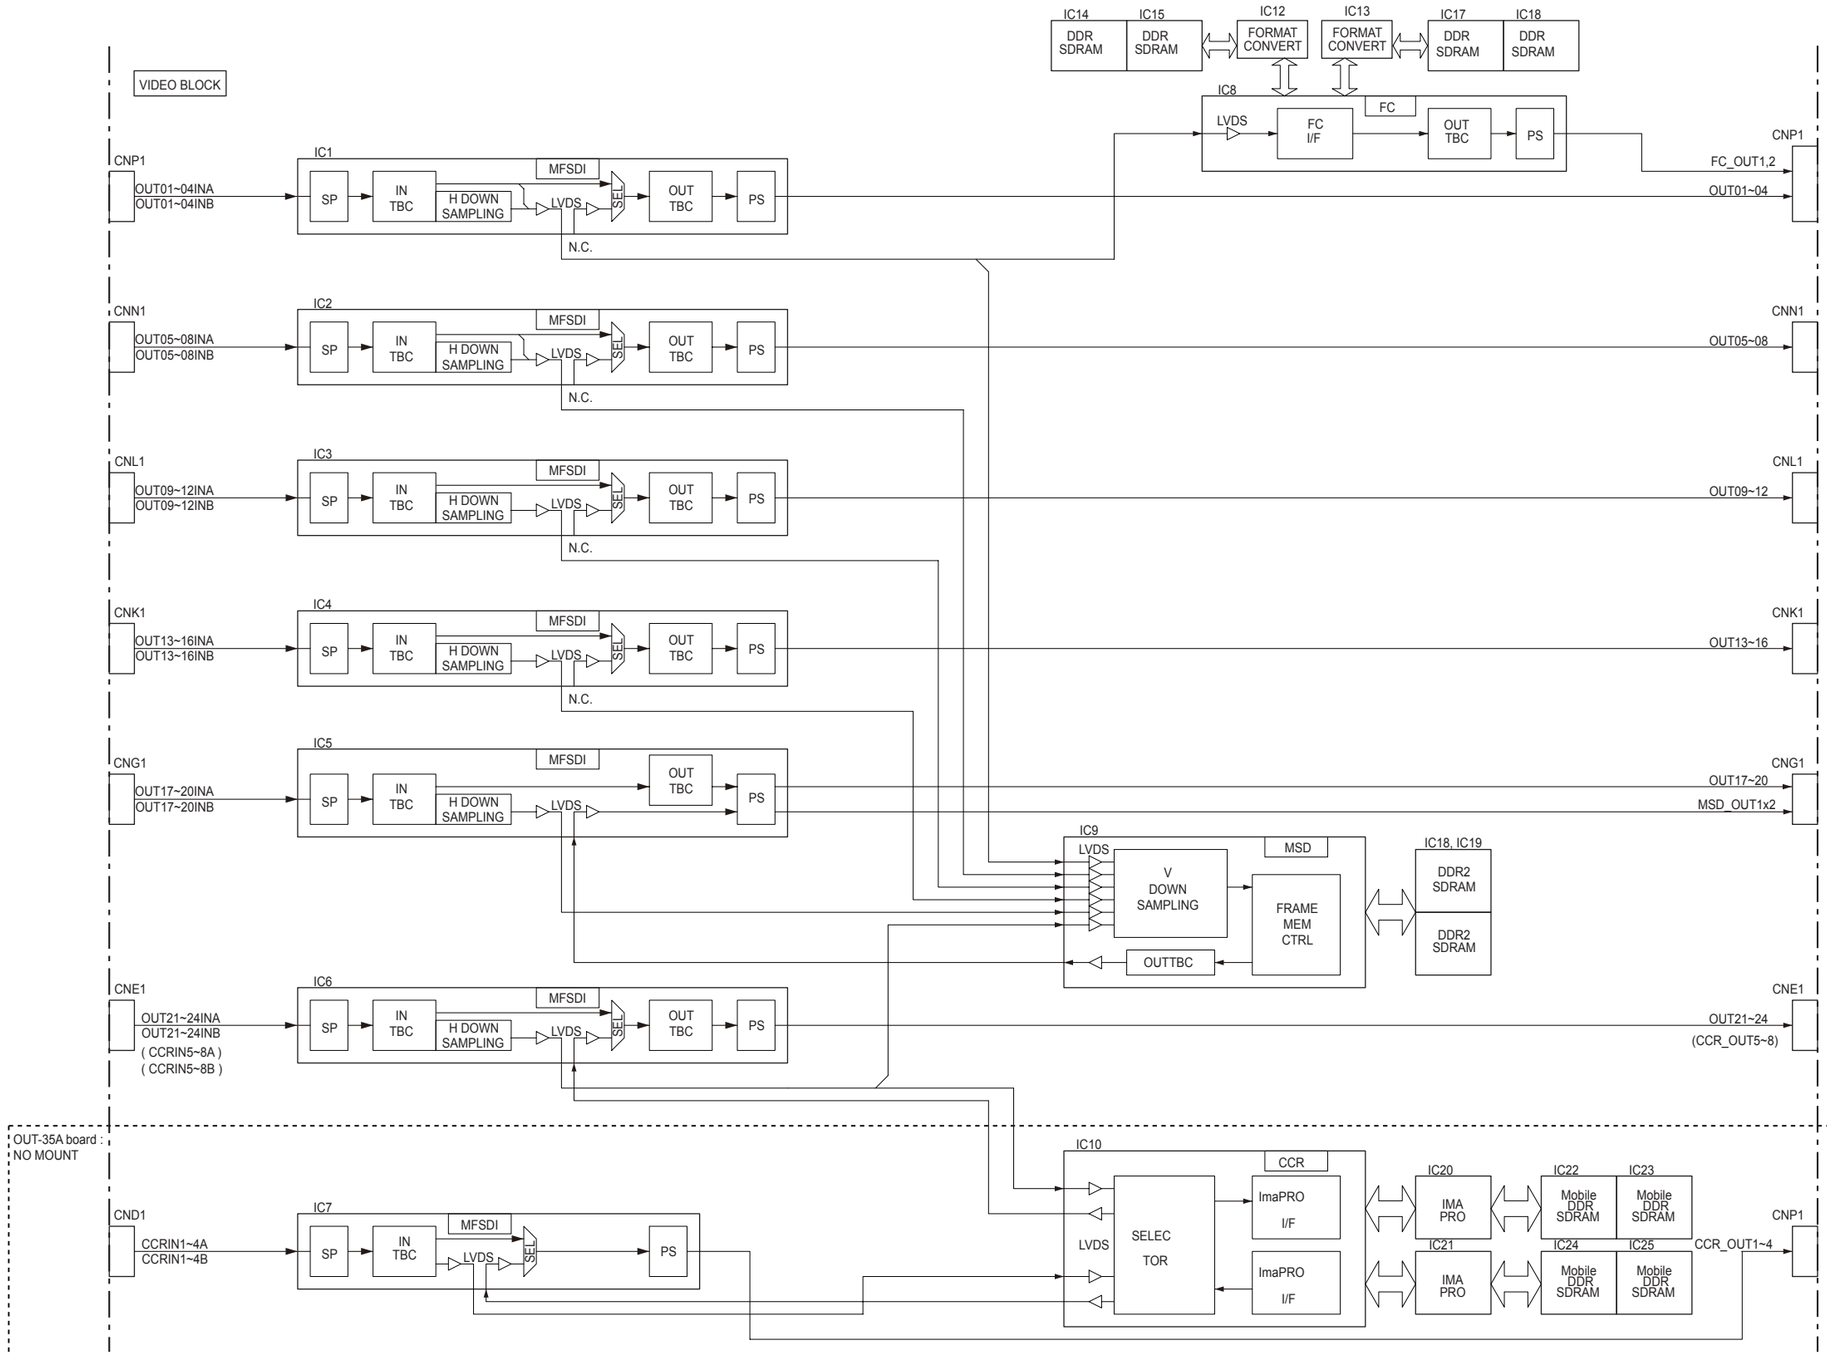

Output Board

OUT-35 (1/2)
OUT-35A (1/2)

3-11

OUT-35 (2/2), OUT-35A (2/2)

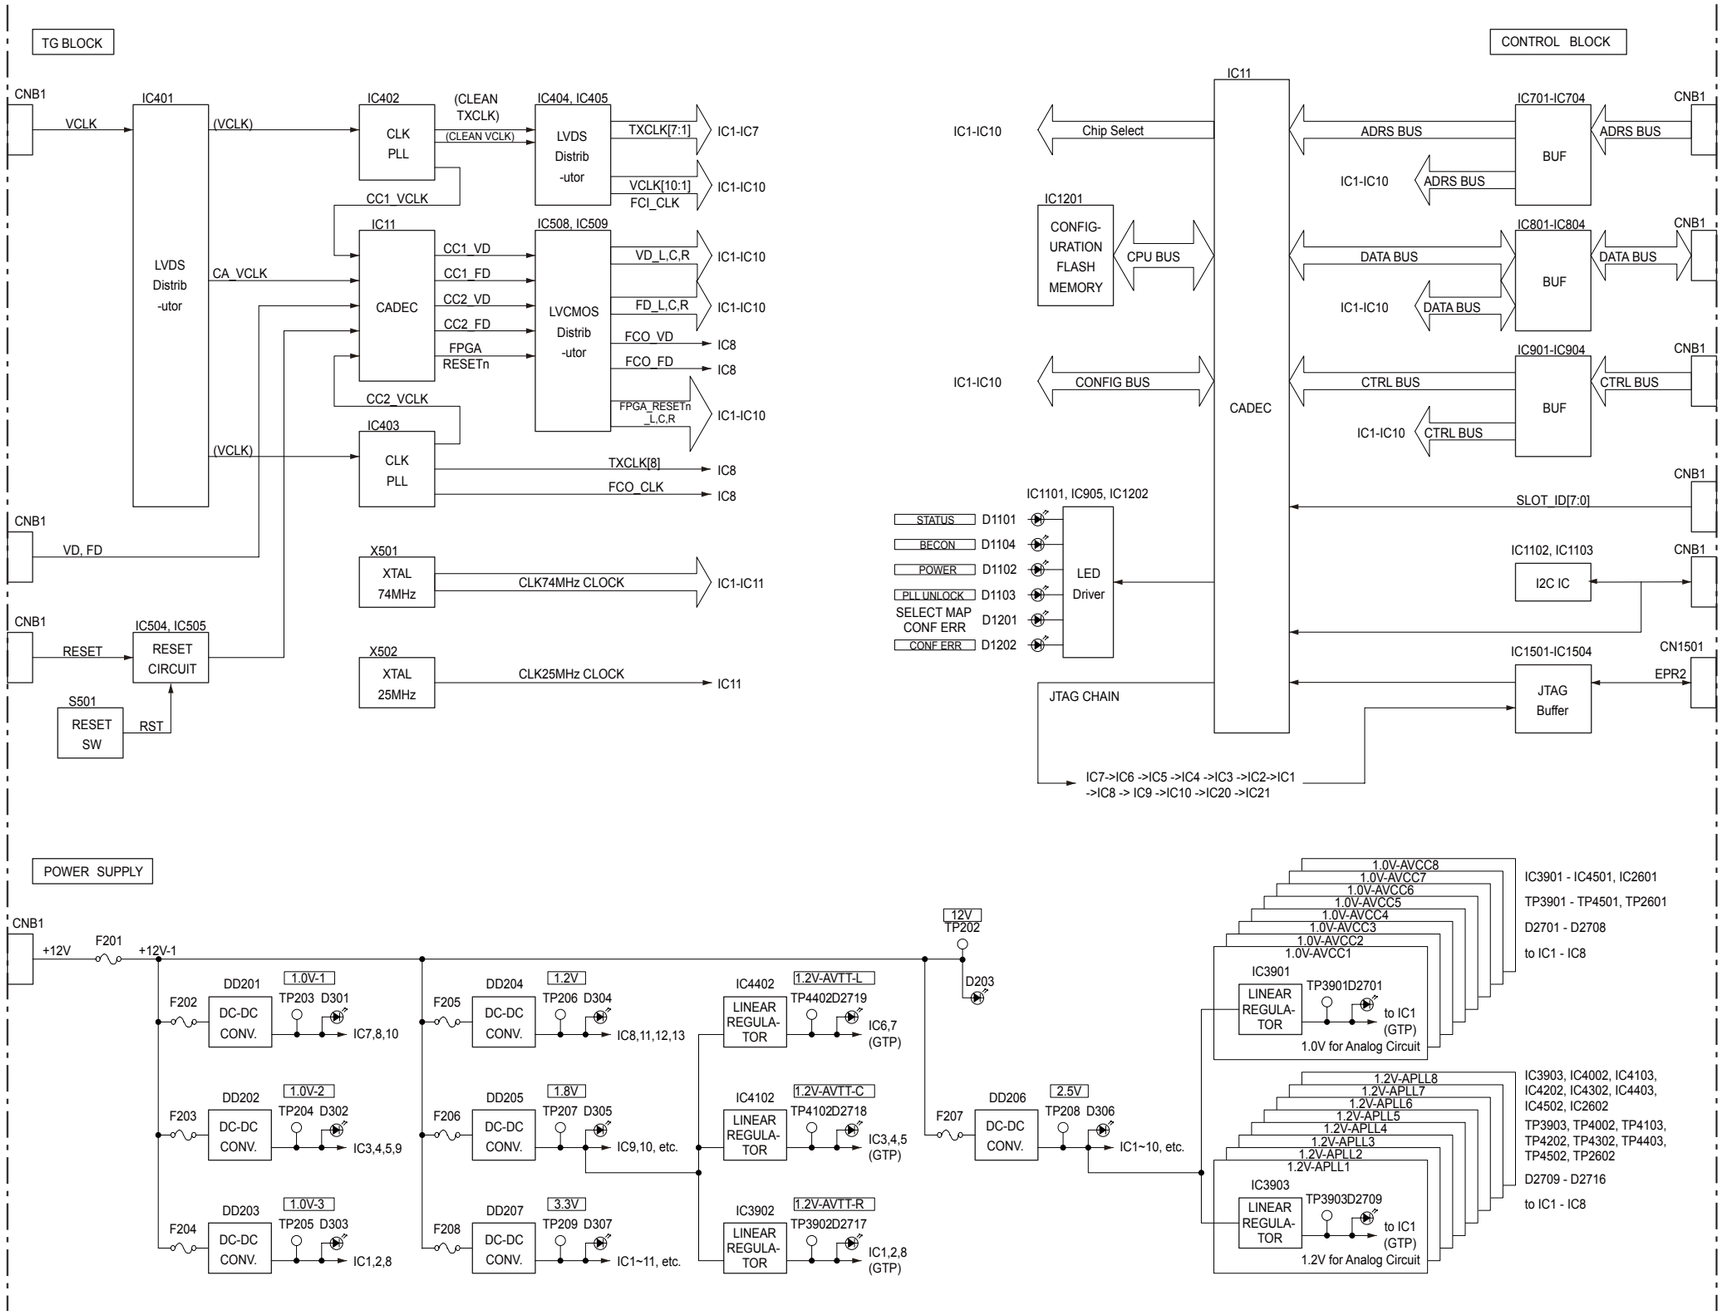

Output Board

OUT-35 (2/2)
OUT-35A (2/2)

3-12

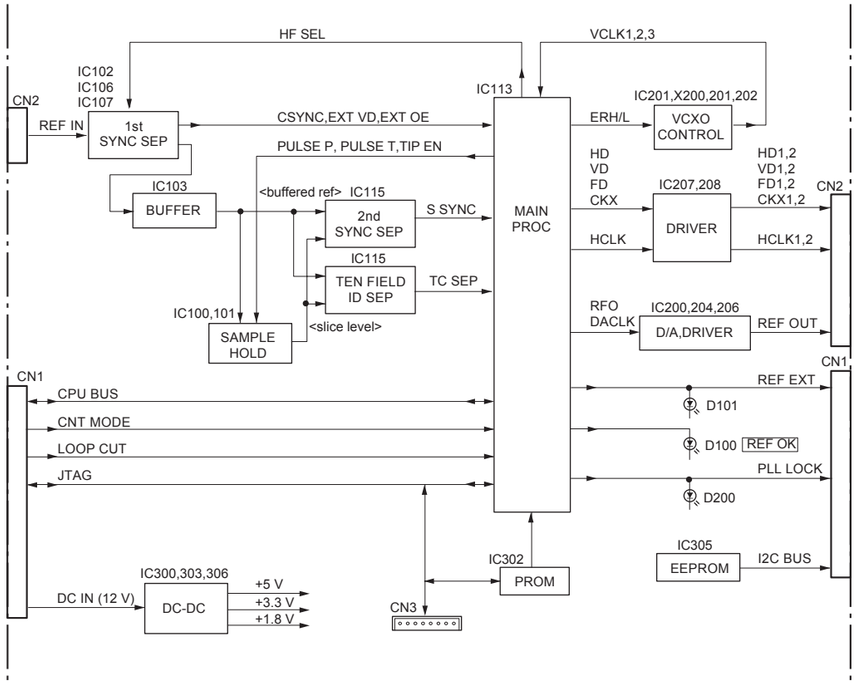

Signal Generator Board
SG-272A

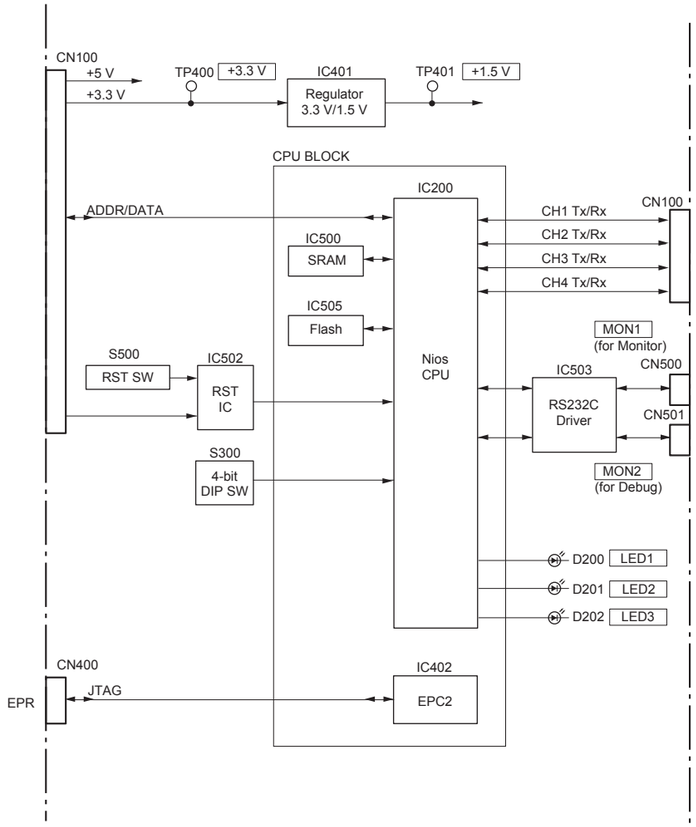

Serial Interface Board
SIO-26A

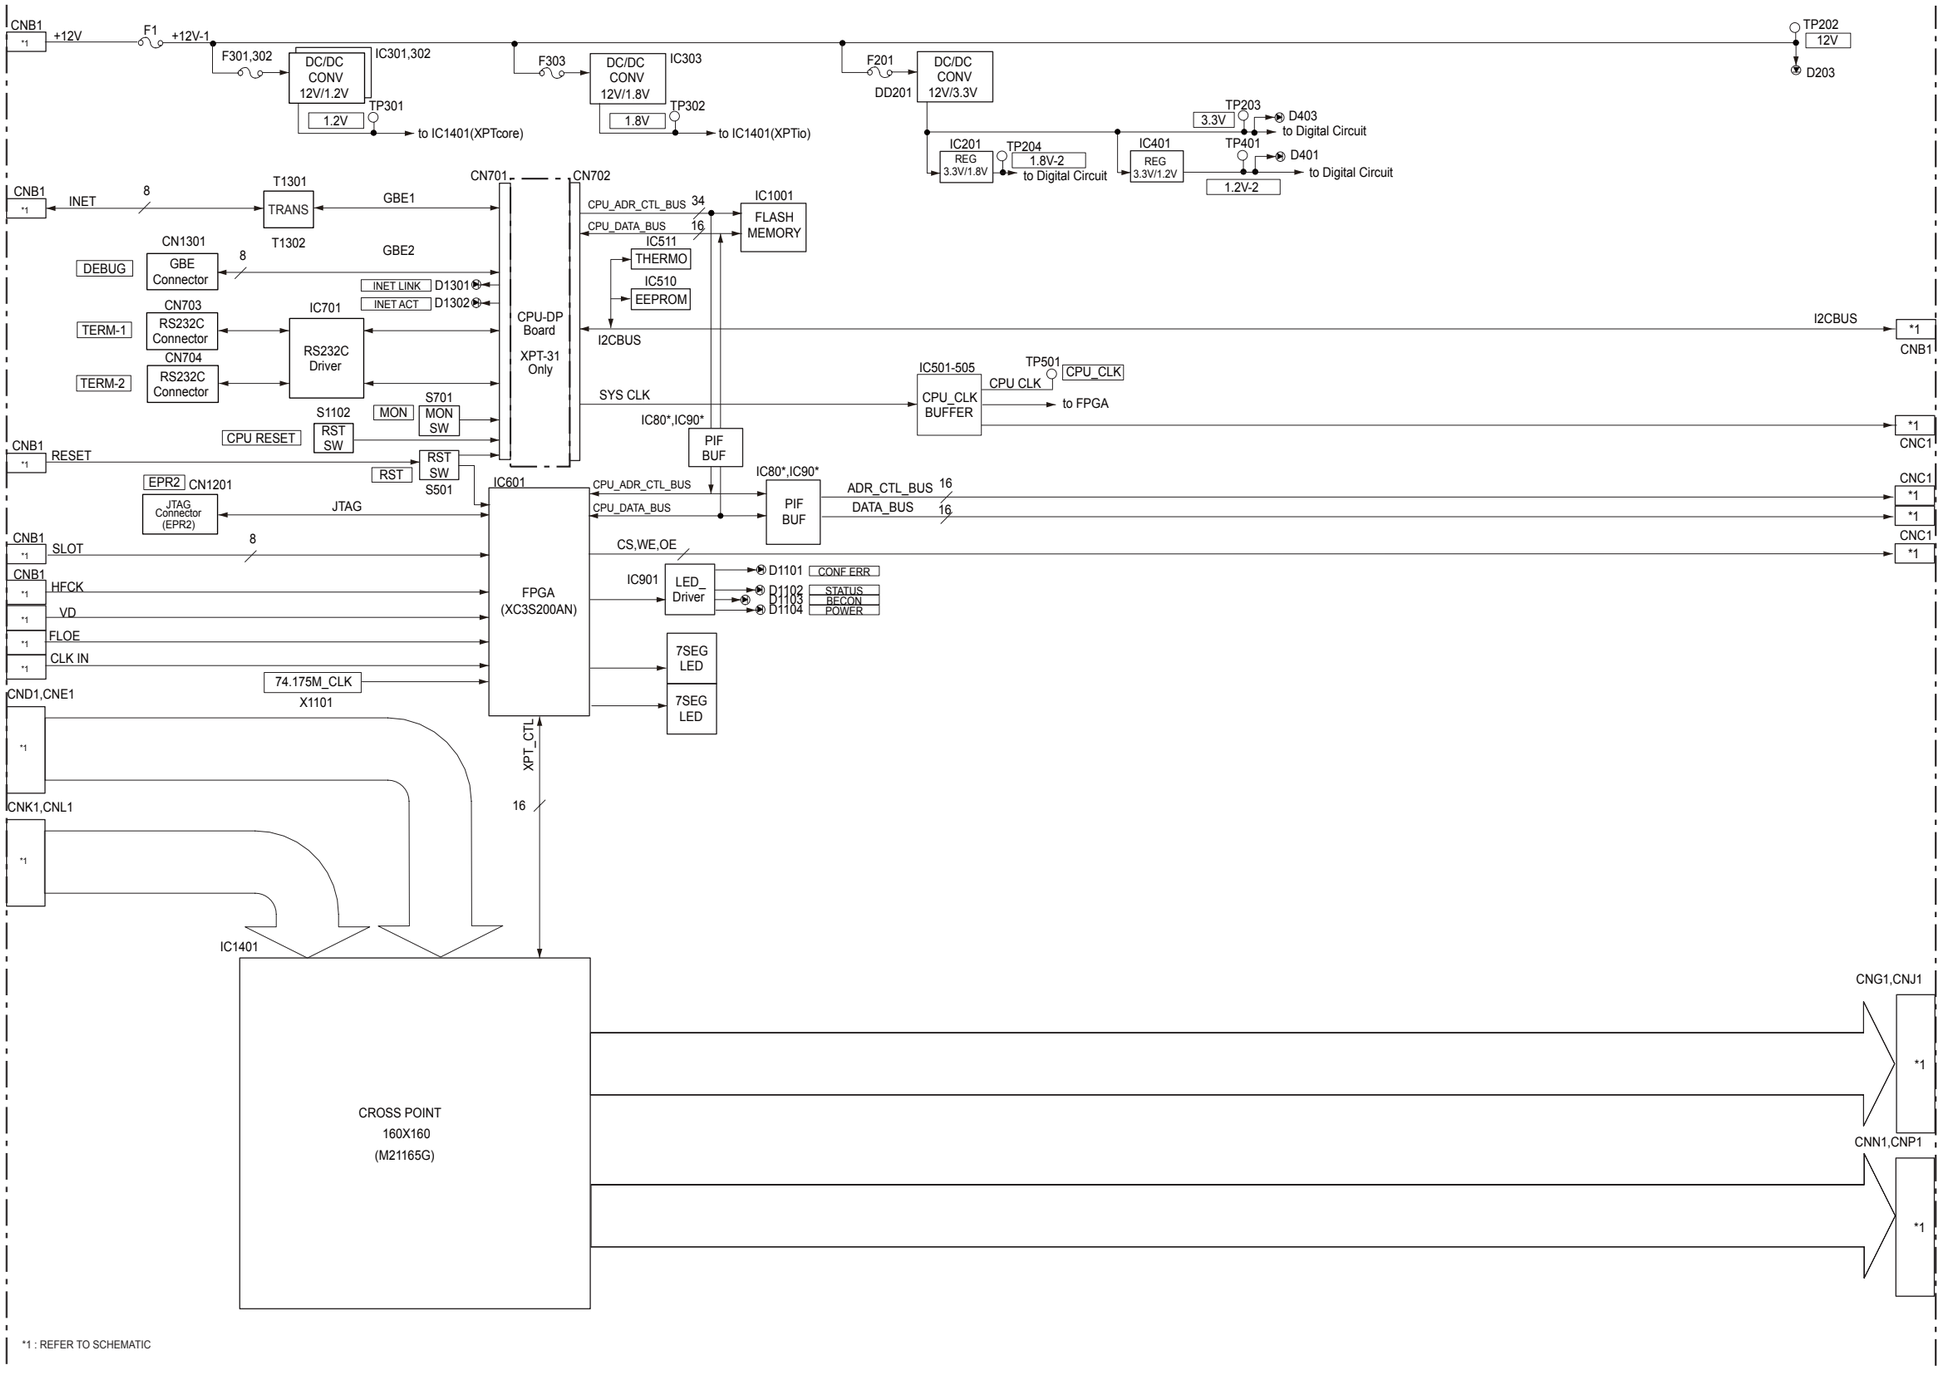

Cross Point Board

XPT-31
XPT-31A

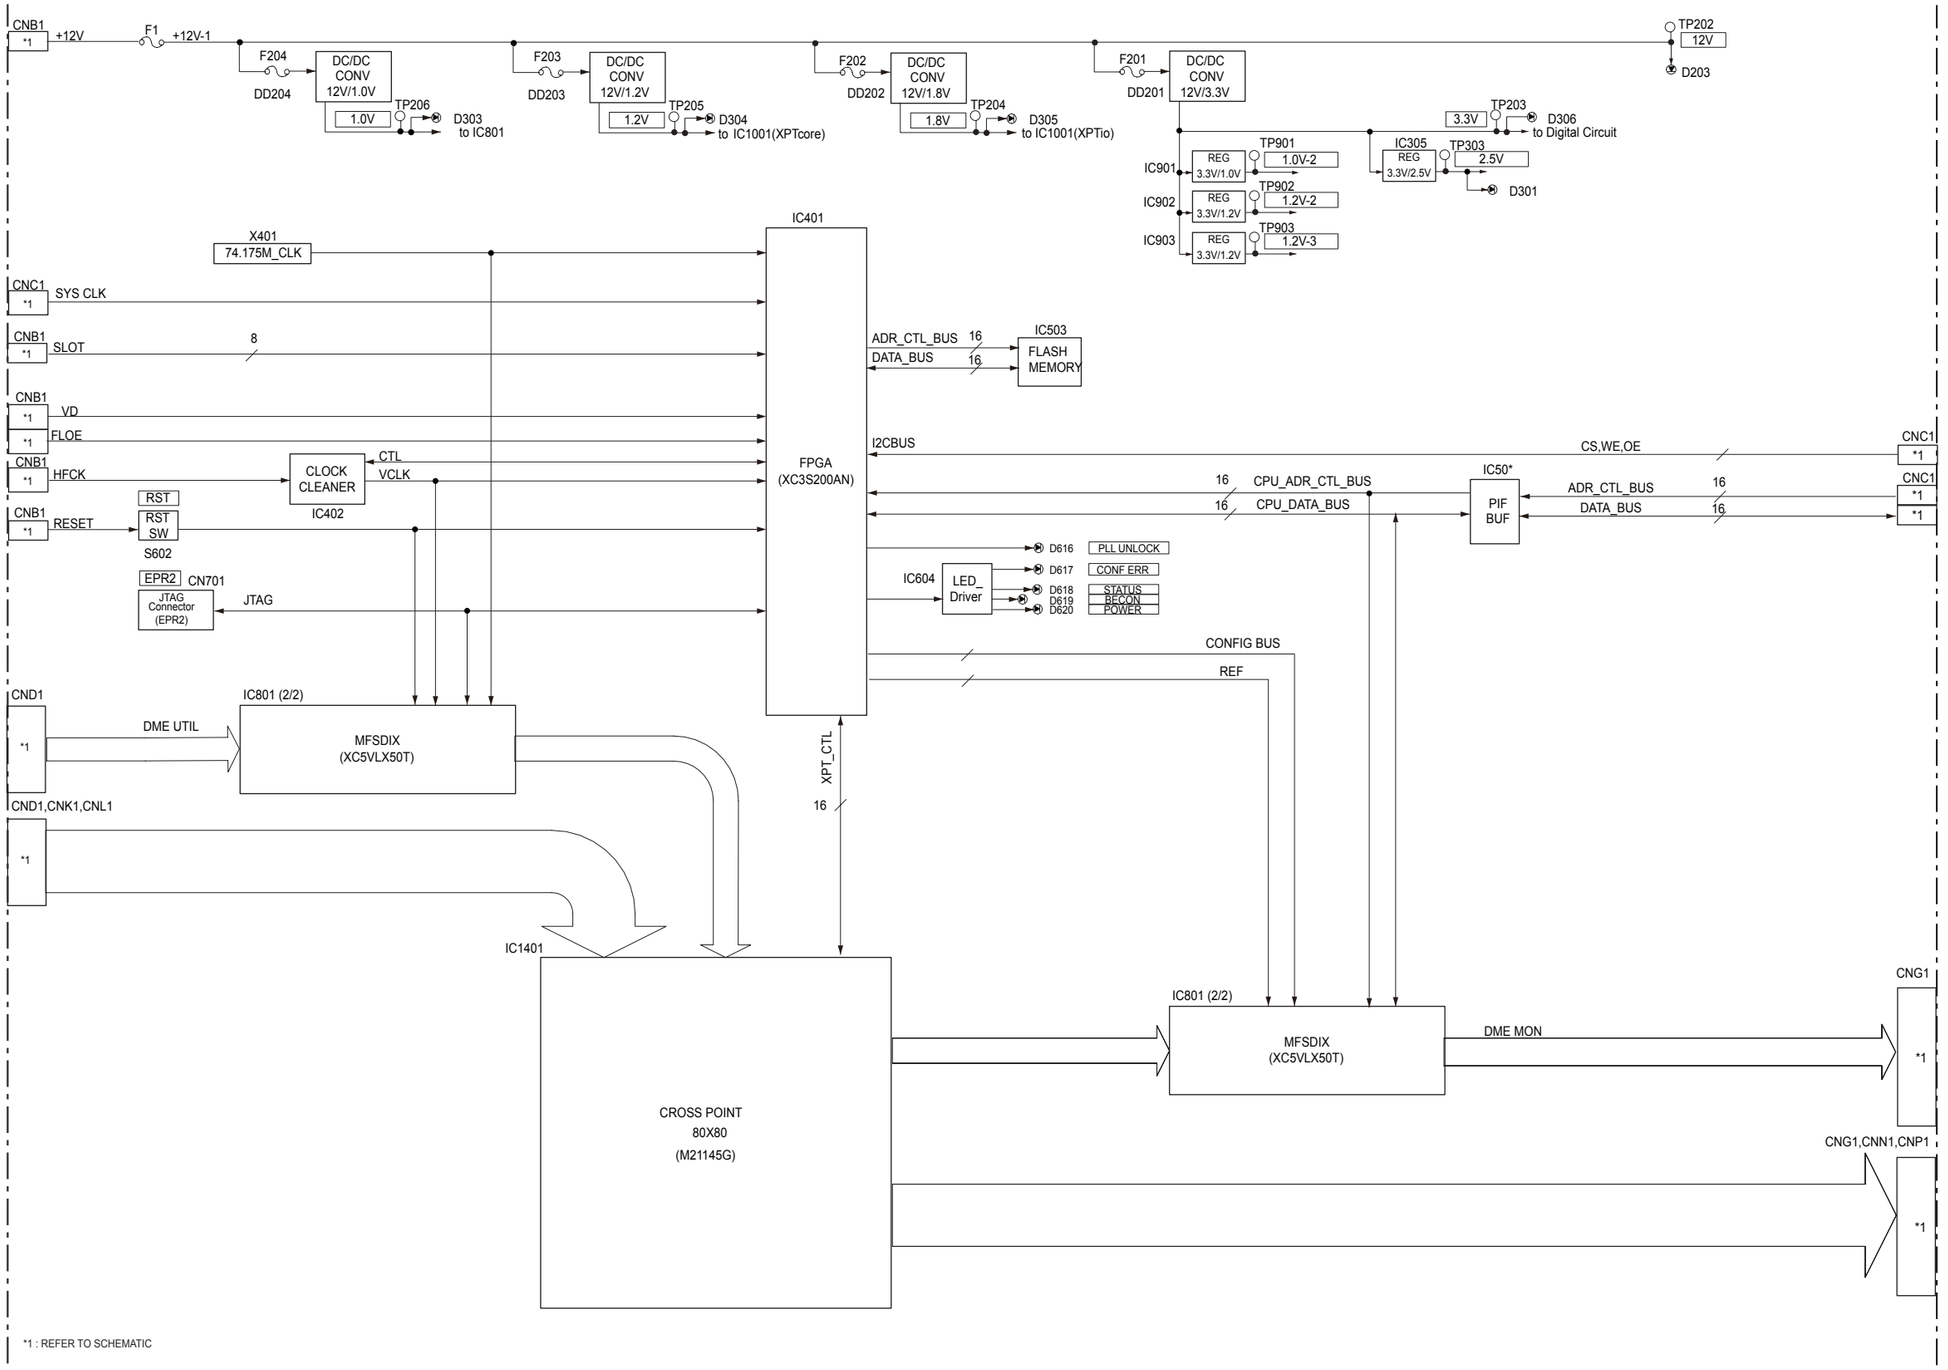

Cross Point Board
XPT-32

Section 4
Schematic Diagrams

Index

Board name		Page
CA-82	SUFFIX-13	4-3
	SUFFIX-14	4-3 (a)
CA-82A		4-45
CN-3233		4-87
CN-3233A		4-91
CN-3234		4-95
CN-3235		4-364
CNI-37	SUFFIX-11	4-99
	SUFFIX-12	4-99 (a)
CNI-37A	SUFFIX-11	4-109
	SUFFIX-12	4-109 (a)
CNO-37	SUFFIX-11	4-119
	SUFFIX-12	4-119 (a)
CNO-38	SUFFIX-11	4-127
	SUFFIX-12	4-127 (a)
CNO-38A	SUFFIX-11	4-134
	SUFFIX-12	4-134 (a)
CNO-38B	SUFFIX-11	4-141
	SUFFIX-12	4-141 (a)
DVP-53		4-370
FC-112		4-424
HN-364	SUFFIX-11	4-148
	SUFFIX-12	4-148
HN-365		4-149
HN-366		4-150
MB-1150		4-151
MB-1151		4-171
MIX-53	SUFFIX-13	4-187
	SUFFIX-14	4-187 (a)
MY-118		4-464
OUT-35		4-235
OUT-35A		4-280
SG-272A		4-325
SIO-26A		4-328
XPT-31/31A	SUFFIX-13	4-333
	SUFFIX-14	4-333 (a)
XPT-32		4-351
Frame Wiring	MVS-8000X	4-512
	MVS-7000X	4-514

4-1

CA-82 (1/41)
SUFFIX: -13

Leftmost

K

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	DC_ENBL0 (EMG)	DC_ENBL1 (Normal)	GND	SD/HD0	FUSE+12V	GND
6	GND (BD_EXIST_17F)	(BD_EXIST_17R)	GND	SD/HD1	SD/HD2	GND
7	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
8	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10	RESET0	RESET1	GND	RESET2	RESET3	GND

HD/SD : high -> SD, Low -> HD

CNC1

	A	B	BG	C	D	DG
1	VCLK0P	VCLK0N	GND	VCLK1P	VCLK1N	GND
2	VCLK2P	VCLK2N	GND	VCLK3P	VCLK3N	GND
3	VCLK4P	VCLK4N	GND	VCLK5P	VCLK5N	GND
4	VCLK6P	VCLK6N	GND	VCLK7P	VCLK7N	GND
5	VCLK8P	VCLK8N	GND	VCLK9P	VCLK9N	GND
6	VCLK10P	VCLK10N	GND	VCLK11P	VCLK11N	GND
7	VCLK12P	VCLK12N	GND			GND
8	FD0P	FD0N	GND	VD0P	VD0N	GND
9	FD1P	FD1N	GND	VD1P	VD1N	GND
10	FD2P	FD2N	GND	VD2P	VD2N	GND

CND1

	A	B	BG	C	D	DG
1	FD3P	FD3N	GND	VD3P	VD3N	GND
2	FD4P	FD4N	GND	VD4P	VD4N	GND
3	FD5P	FD5N	GND	VD5P	VD5N	GND
4	FD6P	FD6N	GND	VD6P	VD6N	GND
5	FD7P	FD7N	GND	VD7P	VD7N	GND
6	FD8P	FD8N	GND	VD8P	VD8N	GND
7	FD9P	FD9N	GND	VD9P	VD9N	GND
8	FD10P	FD10N	GND	VD10P	VD10N	GND
9	FD11P	FD11N	GND	VD11P	VD11N	GND
10	FD12P	FD12N	GND	VD12P	VD12N	GND

CNJ1

	A	B	BG	C	D	DG
1	EXTBUS_CS4		GND	EXTBUS_INT	EXTBUS_BUSY	GND
2	INET0_TRX0P	INET0_TRX0N	GND	INET0_TRX1P	INET0_TRX1N	GND
3	INET0_TRX2P	INET0_TRX2N	GND	INET0_TRX3P	INET0_TRX3N	GND
4	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
5	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
6			GND			GND
7	INET2_TRX0P	INET2_TRX0N	GND	INET2_TRX1P	INET2_TRX1N	GND
8	INET2_TRX2P	INET2_TRX2N	GND	INET2_TRX3P	INET2_TRX3N	GND
9	INET3_TRX0P	INET3_TRX0N	GND	INET3_TRX1P	INET3_TRX1N	GND
10	INET3_TRX2P	INET3_TRX2N	GND	INET3_TRX3P	INET3_TRX3N	GND

CNK1

	A	B	BG	C	D	DG
1			GND			GND
2	INET4_TRX0P	INET4_TRX0N	GND	INET4_TRX1P	INET4_TRX1N	GND
3	INET4_TRX2P	INET4_TRX2N	GND	INET4_TRX3P	INET4_TRX3N	GND
4	INET5_TRX0P	INET5_TRX0N	GND	INET5_TRX1P	INET5_TRX1N	GND
5	INET5_TRX2P	INET5_TRX2N	GND	INET5_TRX3P	INET5_TRX3N	GND
6			GND			GND
7	INET6_TRX0P	INET6_TRX0N	GND	INET6_TRX1P	INET6_TRX1N	GND
8	INET6_TRX2P	INET6_TRX2N	GND	INET6_TRX3P	INET6_TRX3N	GND
9	INET7_TRX0P	INET7_TRX0N	GND	INET7_TRX1P	INET7_TRX1N	GND
10	INET7_TRX2P	INET7_TRX2N	GND	INET7_TRX3P	INET7_TRX3N	GND

CNL1

	A	B	BG	C	D	DG
1	BD_EXT_19F	BD_EXT_18F	GND	BD_EXT_19R	BD_EXT_18R	GND
2	BD_EXT_17F	BD_EXT_16F	GND	BD_EXT_17R	BD_EXT_16R	GND
3	BD_EXT_15F	BD_EXT_14F	GND	BD_EXT_15R	BD_EXT_14R	GND
4	BD_EXT_13F	BD_EXT_12F	GND	BD_EXT_13R	BD_EXT_12R	GND
5	BD_EXT_11F	BD_EXT_10F	GND	BD_EXT_11R	BD_EXT_10R	GND
6	BD_EXT_9F	BD_EXT_8F	GND	BD_EXT_9R	BD_EXT_8R	GND
7	BD_EXT_7F	BD_EXT_6F	GND	BD_EXT_7R	BD_EXT_6R	GND
8	BD_EXT_5F	BD_EXT_4F	GND	BD_EXT_5R	BD_EXT_4R	GND
9	BD_EXT_3F	BD_EXT_2F	GND	BD_EXT_3R	BD_EXT_2R	GND
10	BD_EXT_1F	BD_EXT_0F	GND	BD_EXT_1R	BD_EXT_0R	GND

K

CNE1

	A	B	BG	C	D	DG
1		TC_IN	GND		REF_INO	GND
2	(REF_IN2)		GND	(REF_IN1)		GND
3	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
4	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
5	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB_RESET_IN	EXTHUB_RESET_OUT	GND
6	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
7			GND	EXTHUB1_INT		GND
8			GND			GND
9			GND			GND
10			GND			GND

K

CNF1

	A	B	BG	C	D	DG
1	GBE0_TRX2P	GBE0_TRX2N	GND	GBE0_TRX3P	GBE0_TRX3N	GND
2	GBE0_TRX0P	GBE0_TRX0N	GND	GBE0_TRX1P	GBE0_TRX1N	GND
3	GBE0_LED_L	GBE0_LED_R	GND	GBE1_LED_L	GBE1_LED_R	GND
4	GBE1_TRX2P	GBE1_TRX2N	GND	GBE1_TRX3P	GBE1_TRX3N	GND
5	GBE1_TRX0P	GBE1_TRX0N	GND	GBE1_TRX1P	GBE1_TRX1N	GND
6	GBE2_TRX2P	GBE2_TRX2N	GND	GBE2_TRX3P	GBE2_TRX3N	GND
7	GBE2_TRX0P	GBE2_TRX0N	GND	GBE2_TRX1P	GBE2_TRX1N	GND
8	GBE2_LED_L	GBE2_LED_R	GND	GBE3_LED_L	GBE3_LED_R	GND
9	GBE3_TRX2P	GBE3_TRX2N	GND	GBE3_TRX3P	GBE3_TRX3N	GND
10	GBE3_TRX0P	GBE3_TRX0N	GND	GBE3_TRX1P	GBE3_TRX1N	GND

CNG1

	A	B	BG	C	D	DG
1	EXTBUS_A0	EXTBUS_A1	GND	EXTBUS_D0	EXTBUS_D1	GND
2	EXTBUS_A2	EXTBUS_A3	GND	EXTBUS_D2	EXTBUS_D3	GND
3	EXTBUS_A4	EXTBUS_A5	GND	EXTBUS_D4	EXTBUS_D5	GND
4	EXTBUS_A6	EXTBUS_A7	GND	EXTBUS_D6	EXTBUS_D7	GND
5	EXTBUS_A8	EXTBUS_A9	GND	EXTBUS_D8	EXTBUS_D9	GND
6	EXTBUS_A10	EXTBUS_A11	GND	EXTBUS_D10	EXTBUS_D11	GND
7	EXTBUS_A12	EXTBUS_A13	GND	EXTBUS_D12	EXTBUS_D13	GND
8	EXTBUS_A14	EXTBUS_A15	GND	EXTBUS_D14	EXTBUS_D15	GND
9	EXTBUS_OE	EXTBUS_WE	GND	EXTBUS_BE0	EXTBUS_BE1	GND
10	EXTBUS_CS0	EXTBUS_CS1	GND	EXTBUS_CS2	EXTBUS_CS3	GND

K

CNM1

	A	B	BG	C	D	DG
1	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
2	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
3	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
4	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
5	GPI2_OUT1	GPI2_IN1	GND	GPI1_OUT1	GPI1_IN1	GND
6	GPI2_OUT2	GPI2_IN2	GND	GPI1_OUT2	GPI1_IN2	GND
7	GPI2_OUT3	GPI2_IN3	GND	GPI1_OUT3	GPI1_IN3	GND
8	GPI2_OUT4	GPI2_IN4	GND	GPI1_OUT4	GPI1_IN4	GND
9	GPI2_OUT5	GPI2_IN5	GND	GPI1_OUT5	GPI1_IN5	GND
10	GPI2_OUT6	GPI2_IN6	GND	GPI1_OUT6	GPI1_IN6	GND

K

CNN1

	A	B	BG	C	D	DG
1	GPI2_OUT7	GPI2_IN7	GND	GPI1_OUT7	GPI1_IN7	GND
2	GPI2_OUT8	GPI2_IN8	GND	GPI1_OUT8	GPI1_IN8	GND
3	POW_SEQ0	POW_SEQ1	GND			GND
4	FAN1_PULSE1	FAN1_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
5	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
6	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
7	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
8	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
9	FAN5_PULSE1	FAN5_PULSE2	GND	FAN5_PULSE3	FAN5_PULSE4	GND
10	FAN5_PULSE5	FAN6_PULSE1	GND	FAN6_PULSE2	FAN6_PULSE3	GND

CNP1

	A	B	BG	C	D	DG
1	FAN6_PULSE4	FAN6_PULSE5	GND	FAN1_CTRL	FAN2_CTRL	GND
2	FAN3_CTRL	FAN4_CTRL	GND	FAN5_CTRL	FAN6_CTRL	GND
3	PS1_B_LED		GND	PS1_FAN_ERR	PS1_THR_ERR	GND
4	PS1_EXIST		GND	PS1_DC_ERR	PS1_AC_ERR	GND
5	PS2_B_LED		GND	PS2_FAN_ERR	PS2_THR_ERR	GND
6	PS2_EXIST		GND	PS2_DC_ERR	PS2_AC_ERR	GND
7	PS3_B_LED		GND	PS3_FAN_ERR	PS3_THR_ERR	GND
8	PS3_EXIST		GND	PS3_DC_ERR	PS3_AC_ERR	GND
9	PS4_B_LED		GND	PS4_FAN_ERR	PS4_THR_ERR	GND
10	PS4_EXIST		GND	PS4_DC_ERR	PS4_AC_ERR	GND

Rightmost

CA-82 (1/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_1

CA-82 (2/41)
SUFFIX: -13

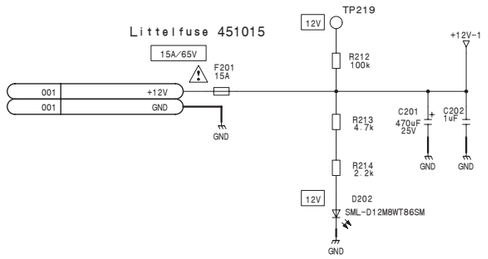

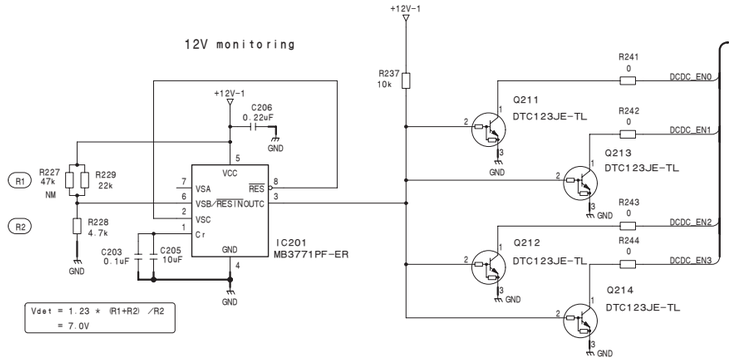

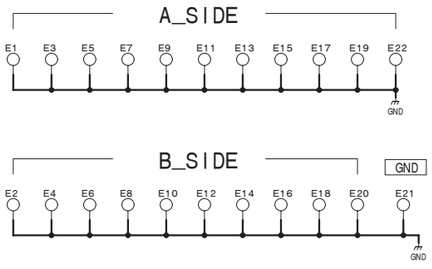

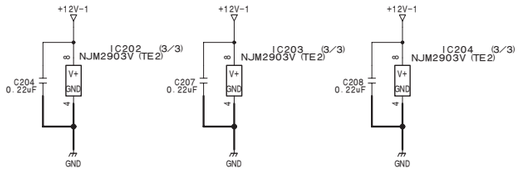

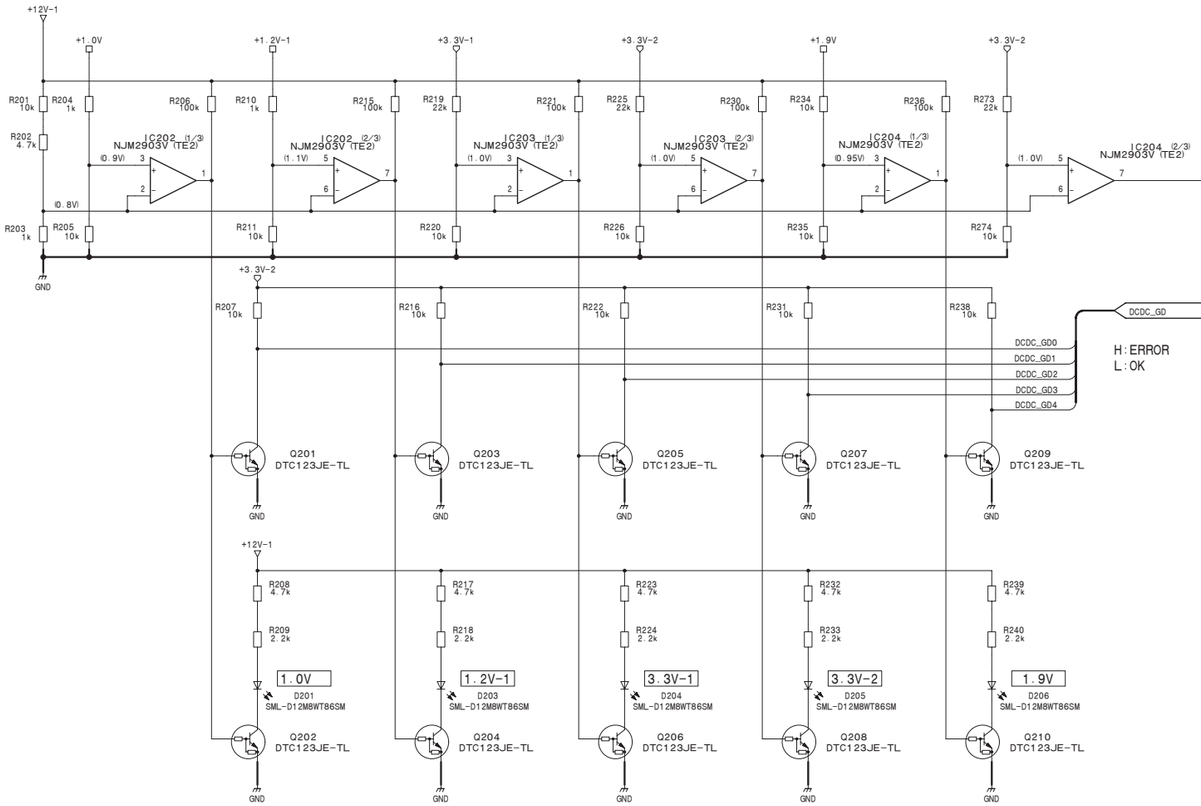

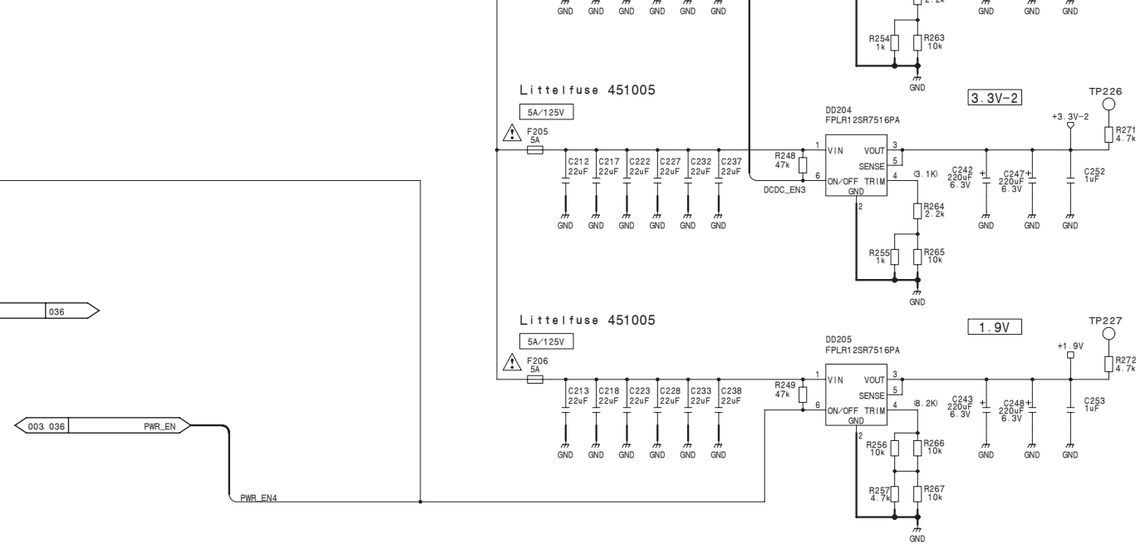

4-4

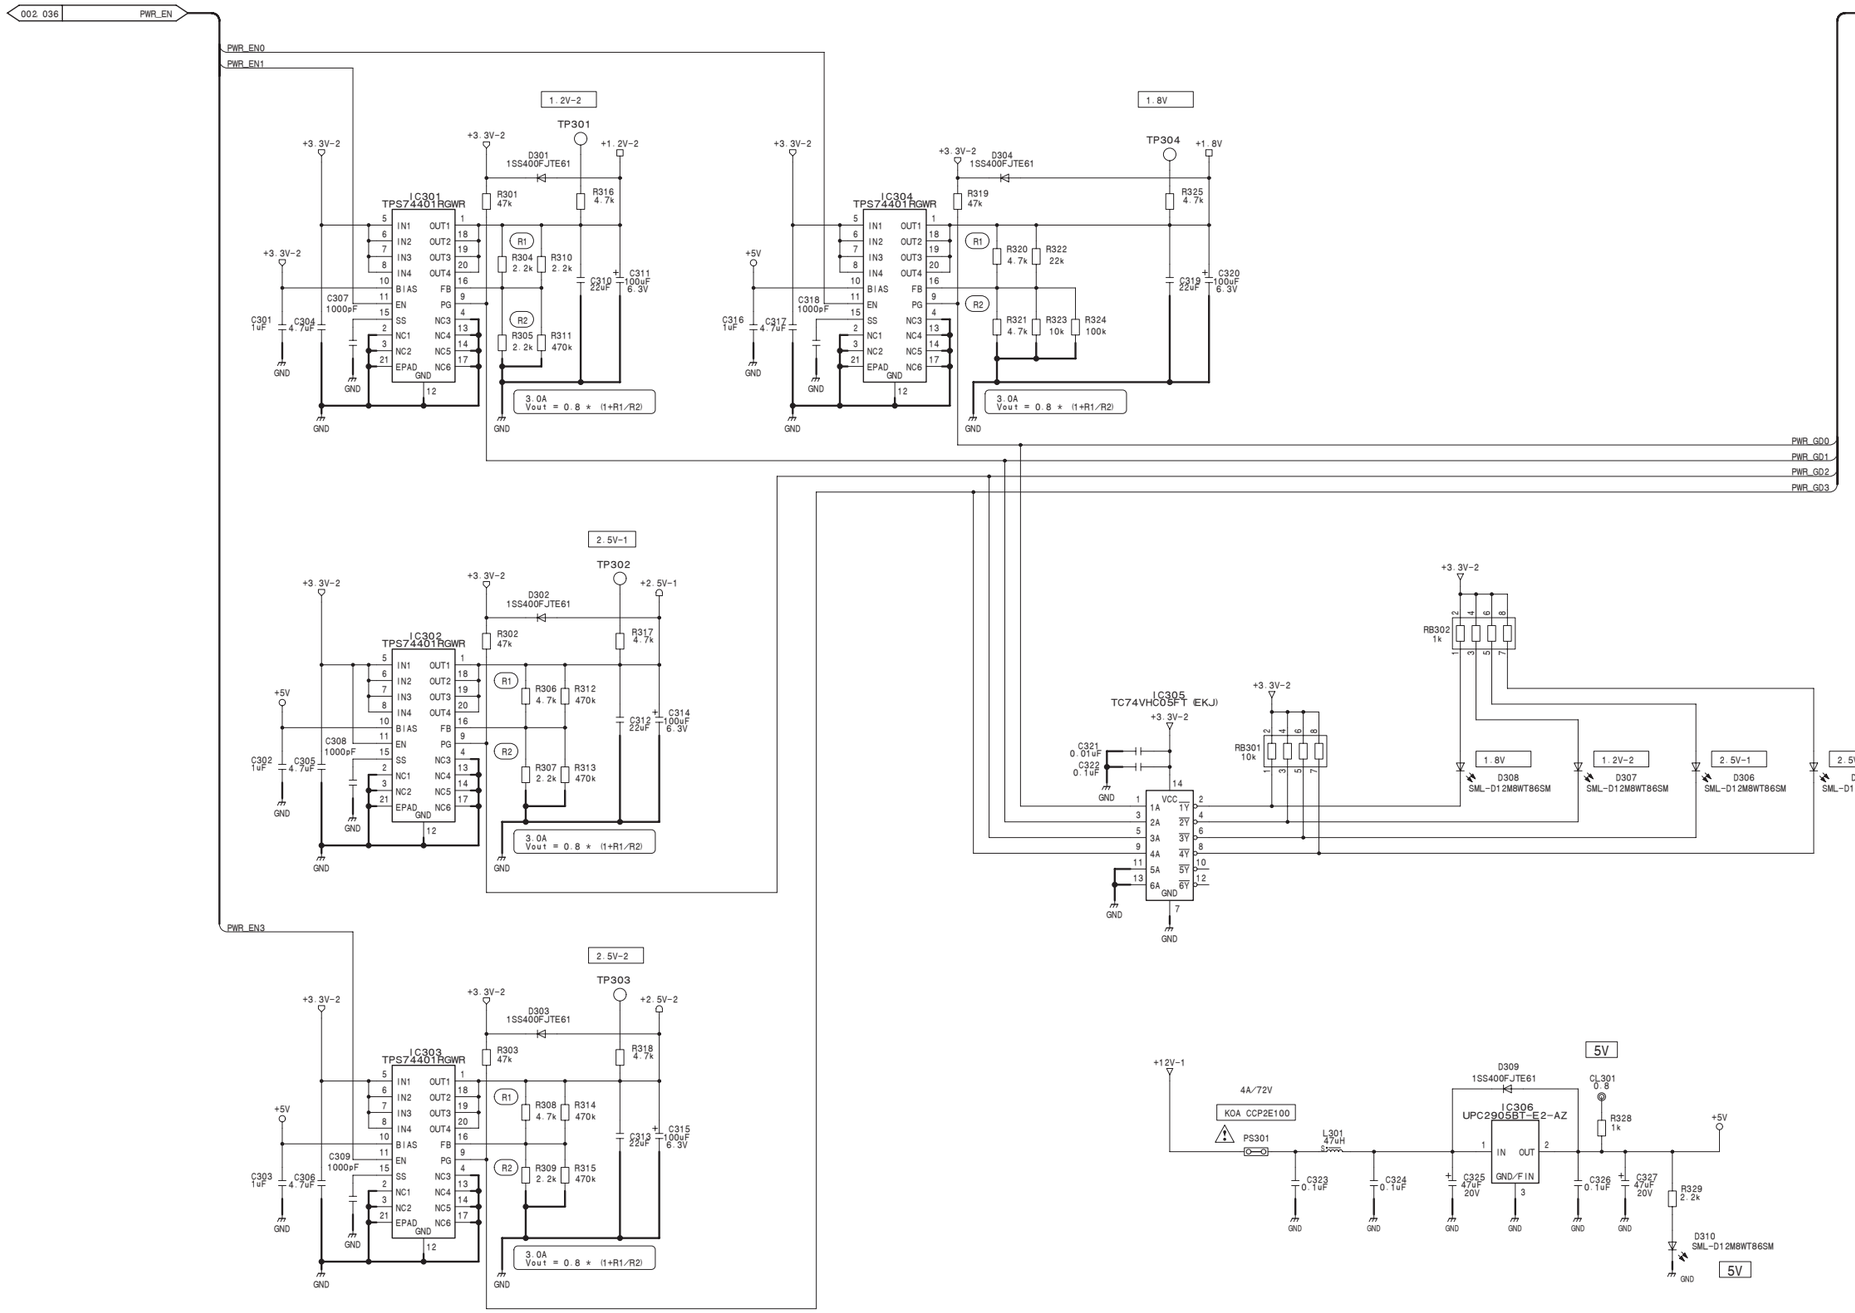

CA-82 (3/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_3

CA-82 (4/41)
SUFFIX: -13

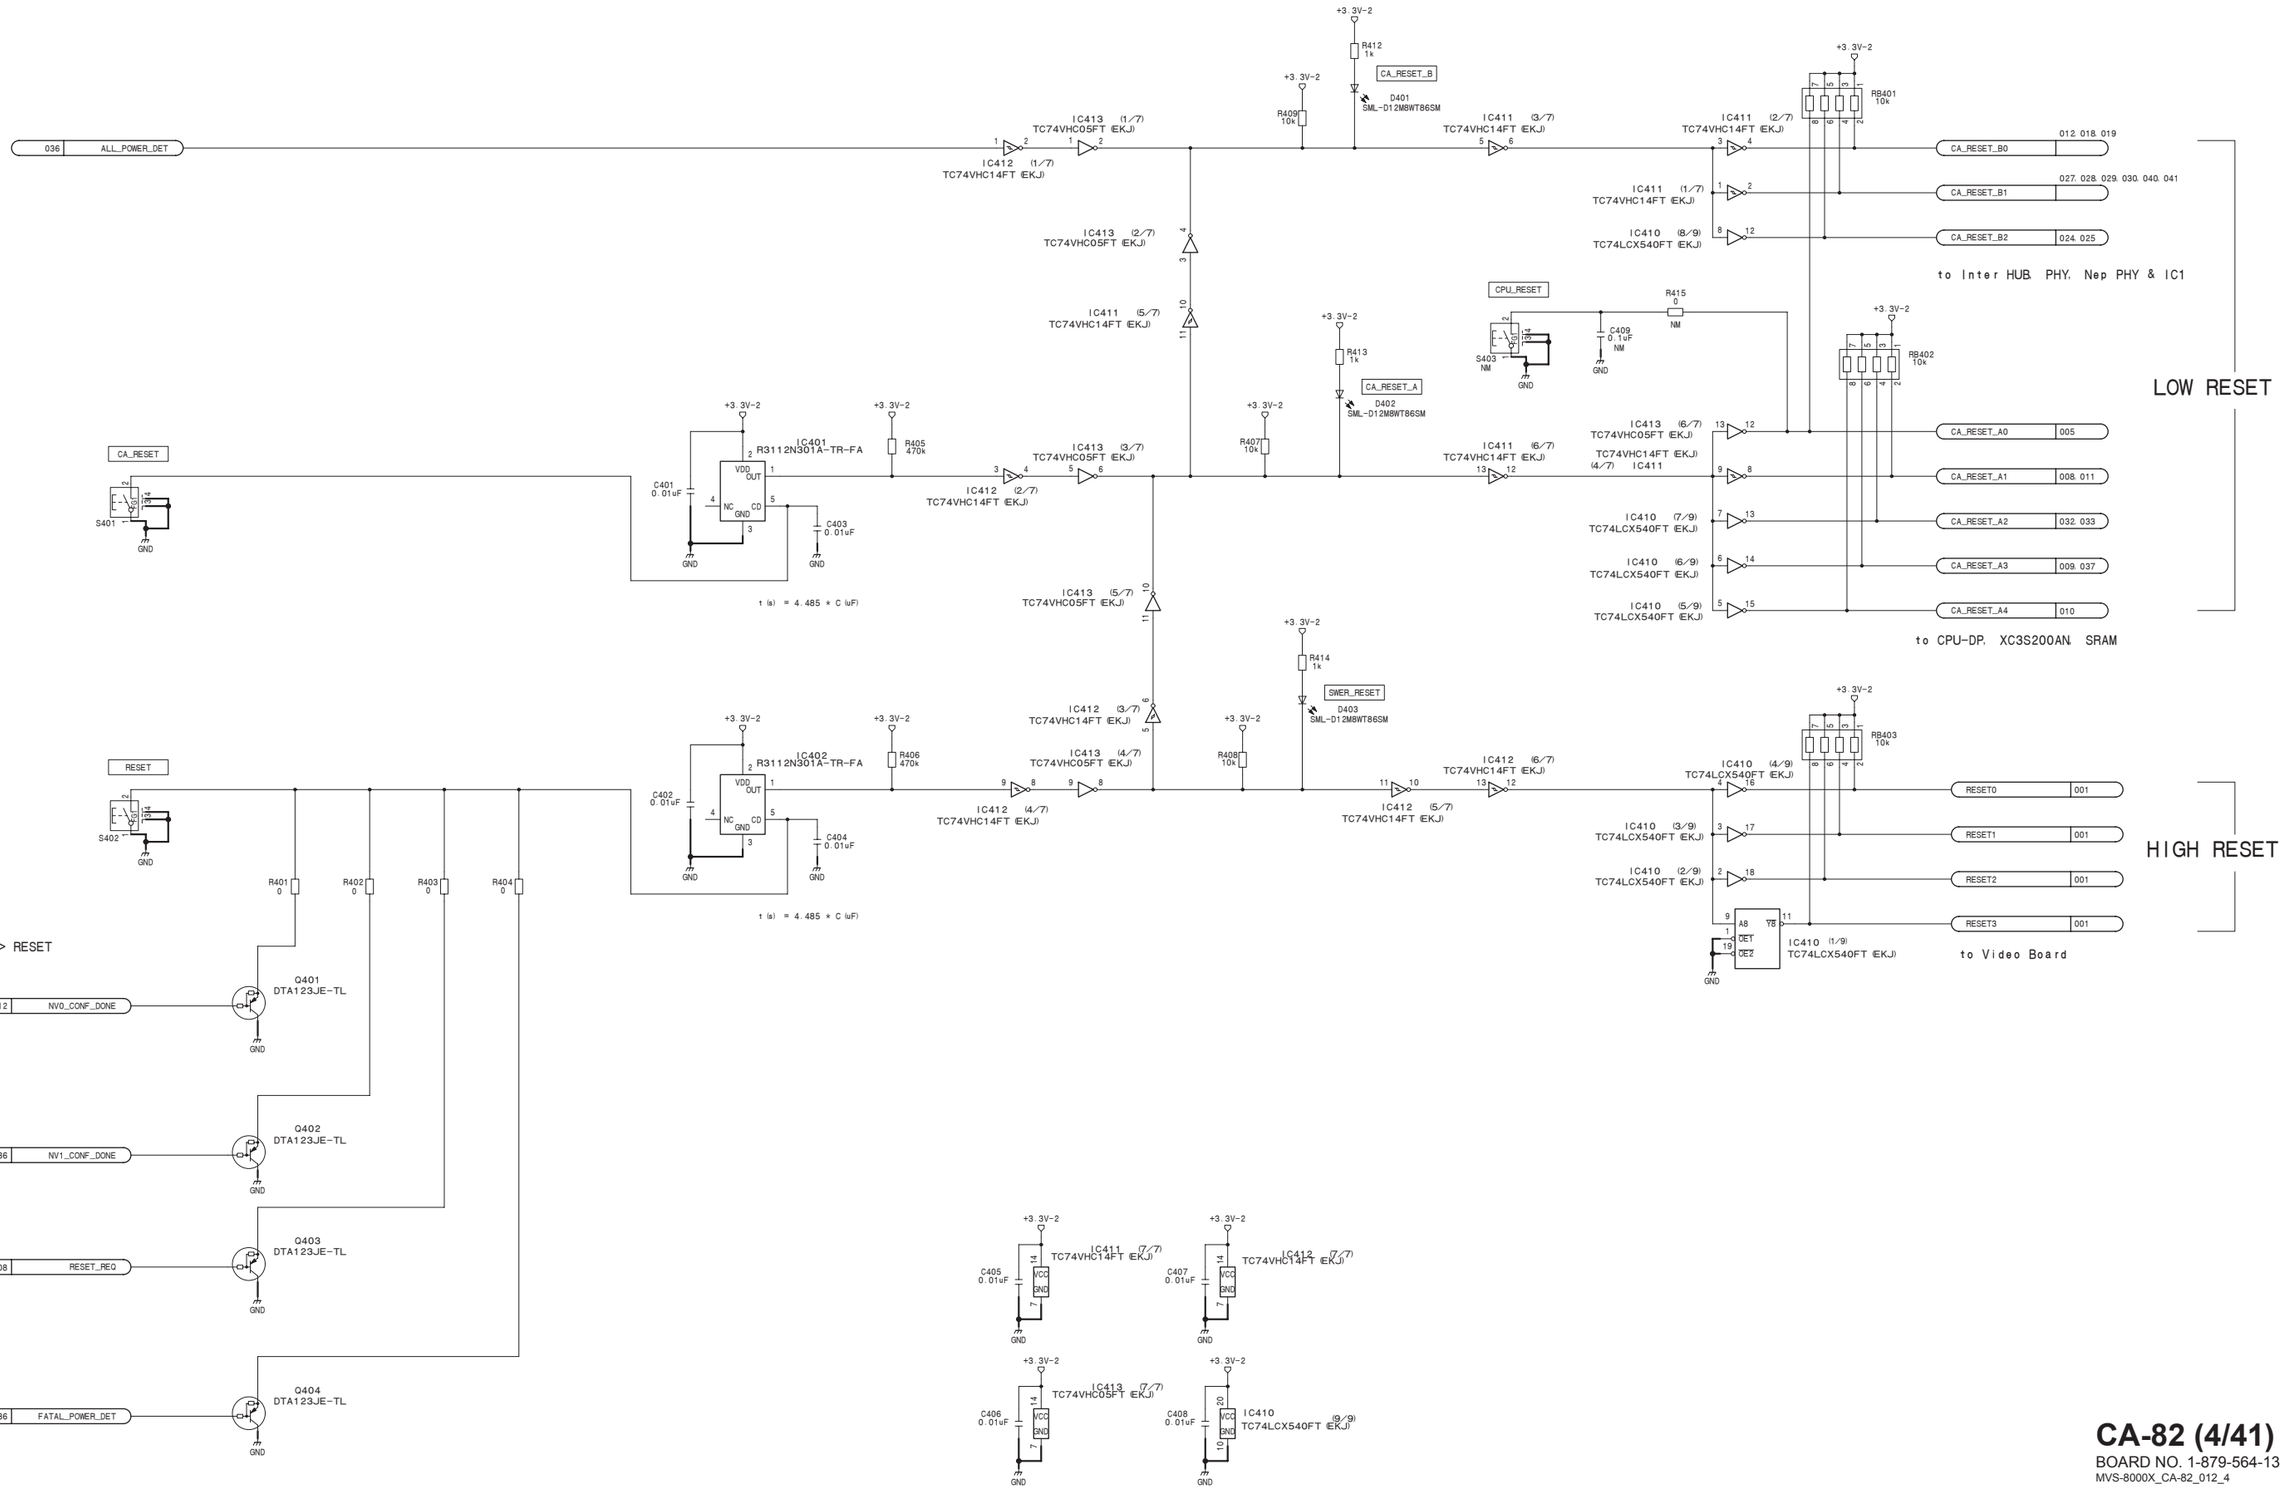

CA-82 (4/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_4

CA-82 (5/41)
SUFFIX: -13

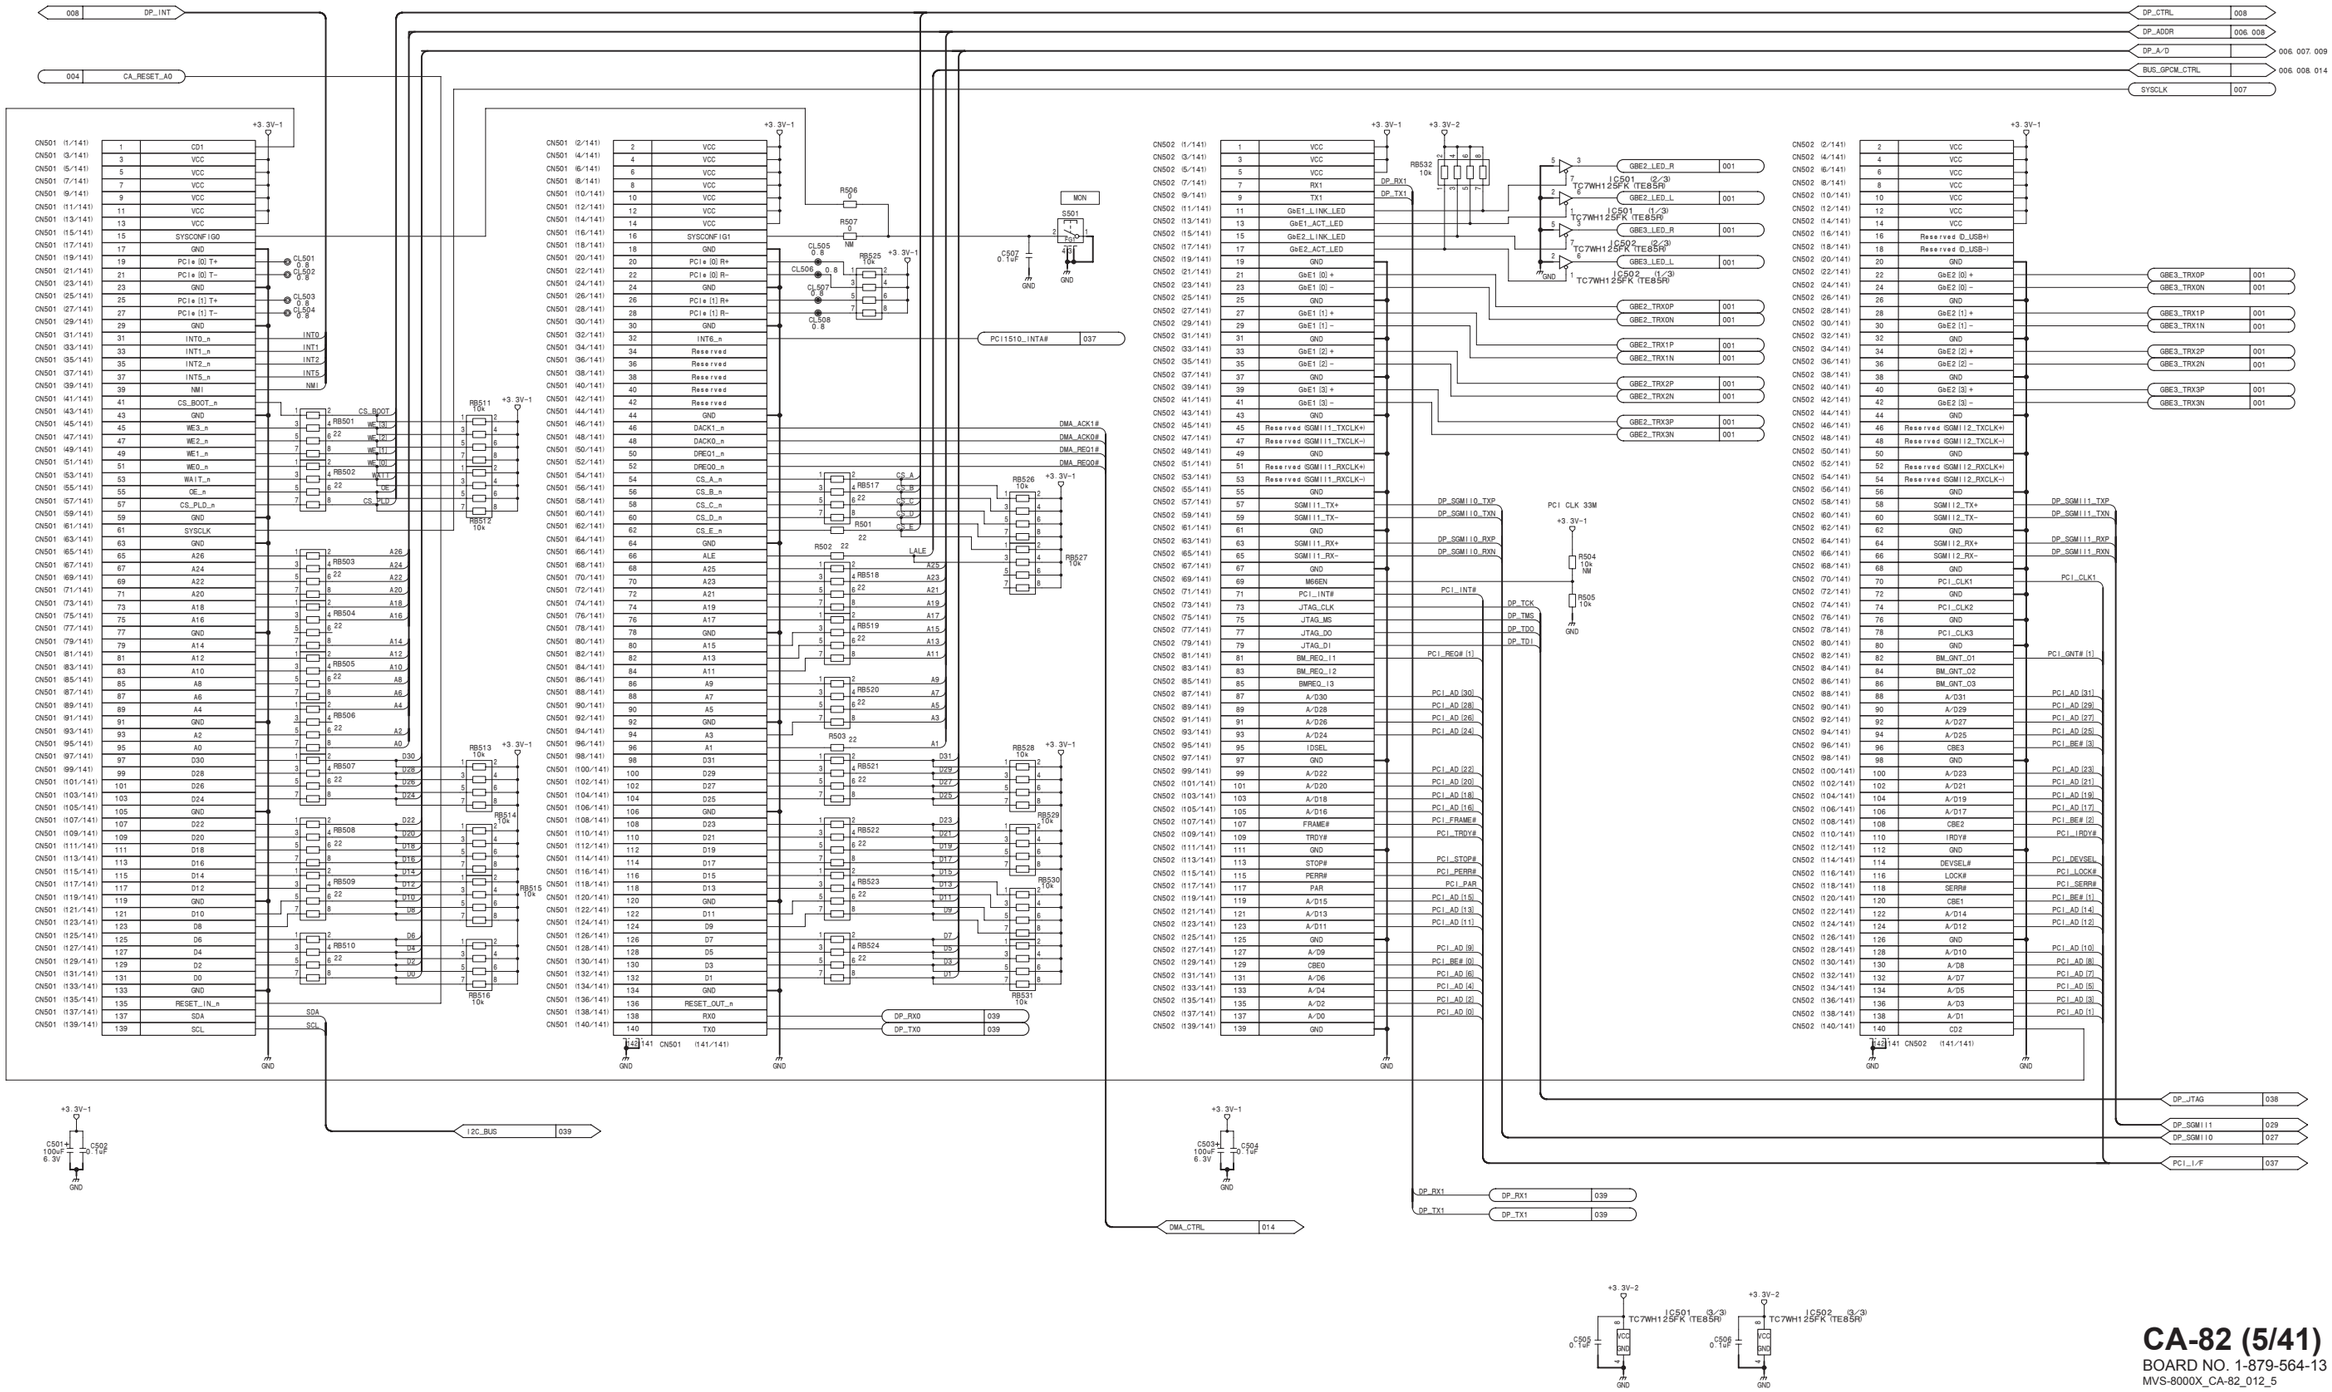

CA-82 (5/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_5

CA-82 (6/41)
SUFFIX: -13

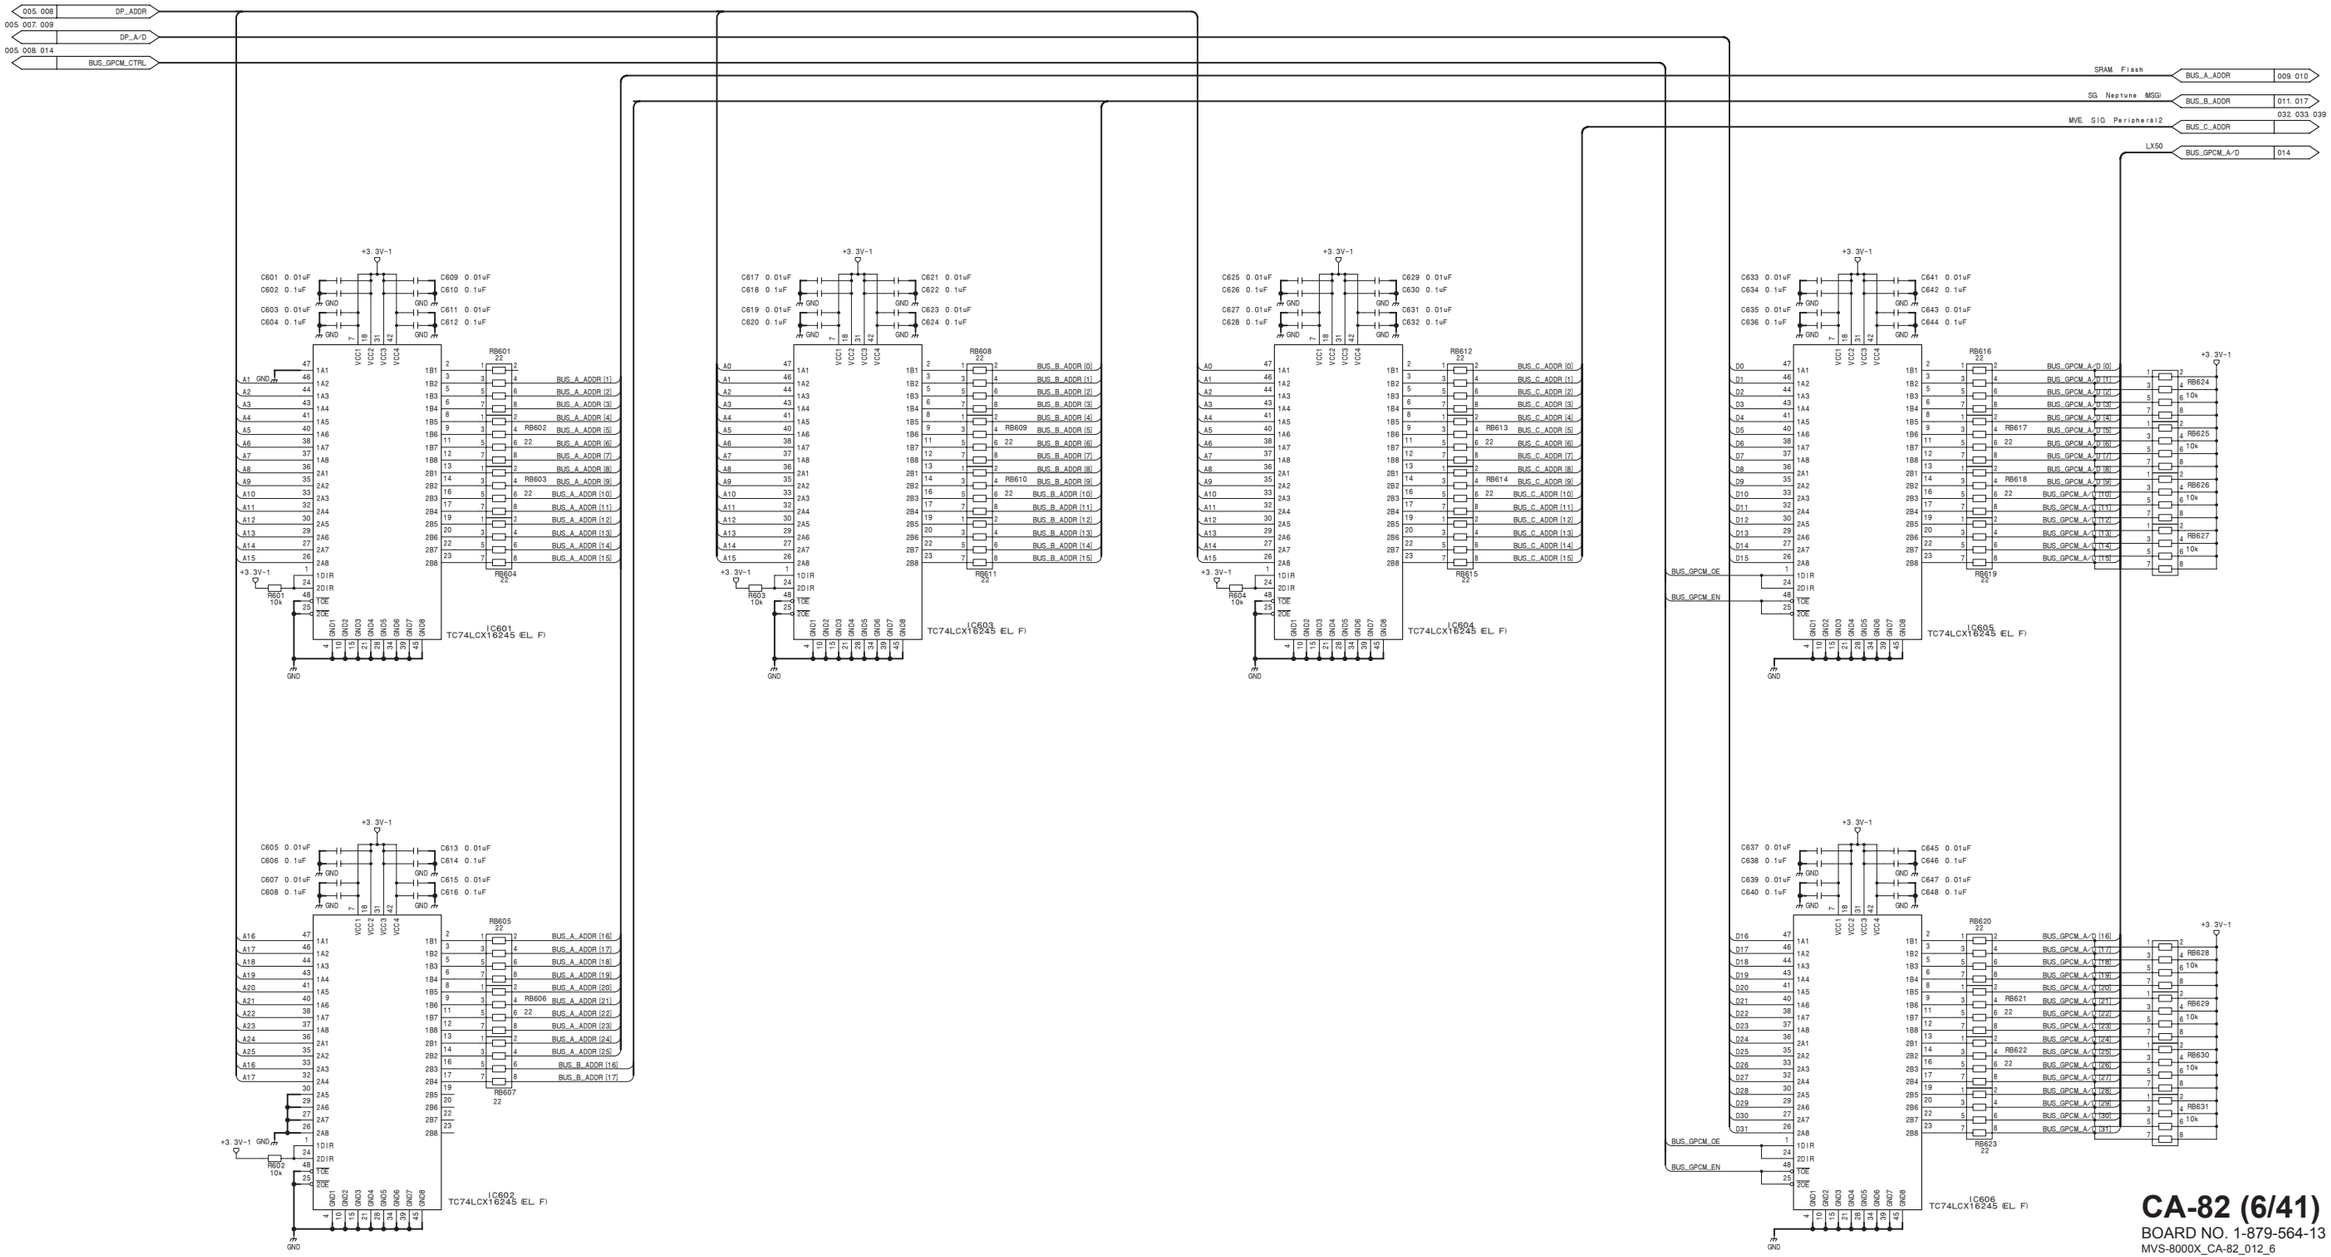

CA-82 (6/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_6

CA-82 (7/41) **SUFFIX: -13**

005. 006. 009 — DP_A/D
008. 009. 010 — BUS_A_CTRL
008. 011. 017 — BUS_B_CTRL
008. 032. 033. 039 — BUS_C_CTRL

SRAM — BUS_A32_DATA — 010
Neptune MSGI x2 — BUS_B32_DATA — 017
SIO, Peripheral2, MVE — BUS_C16_DATA — 032. 033. 039
Peripheral1, SG — BUS_B8_DATA — 008. 011

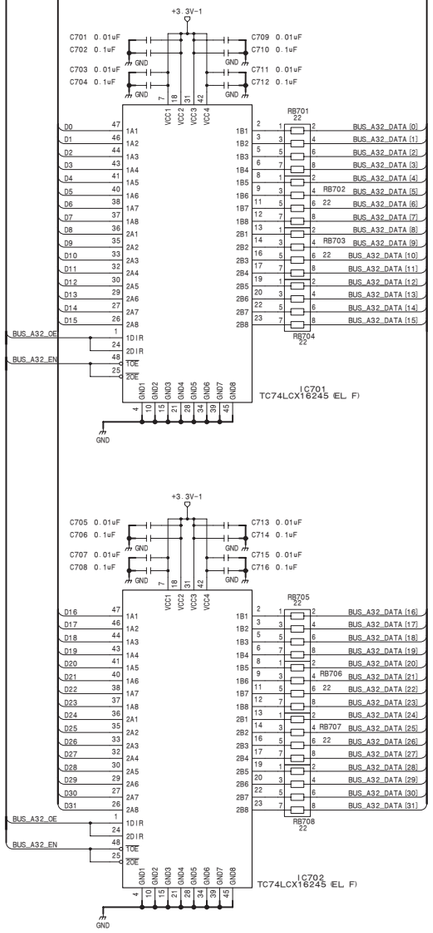

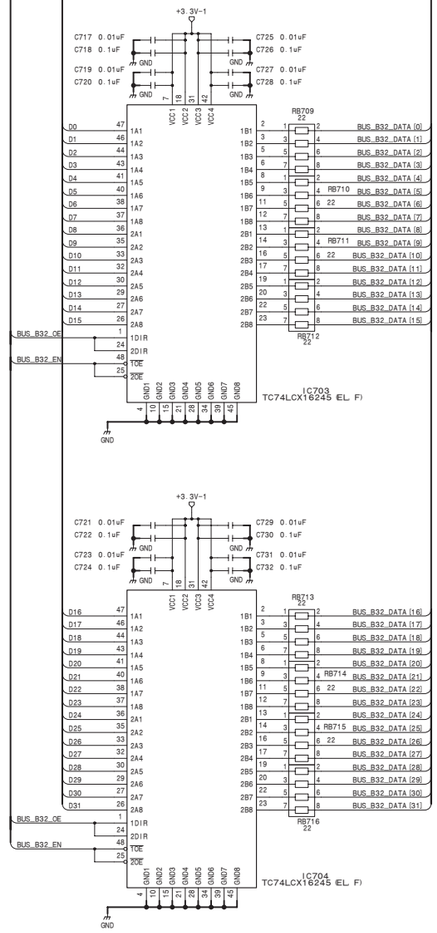

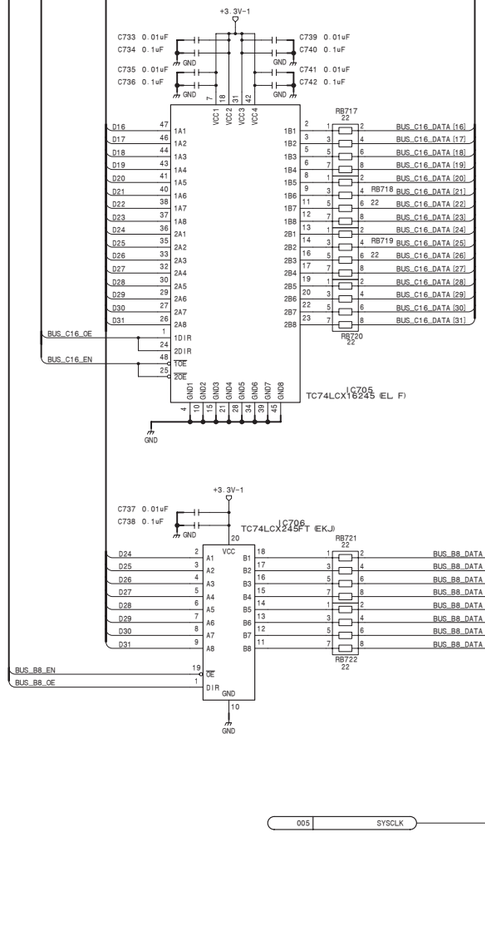

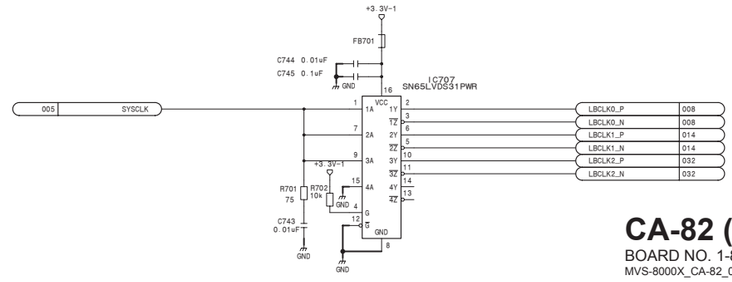

CA-82 (7/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_7

CA-82 (8/41)
SUFFIX: -13

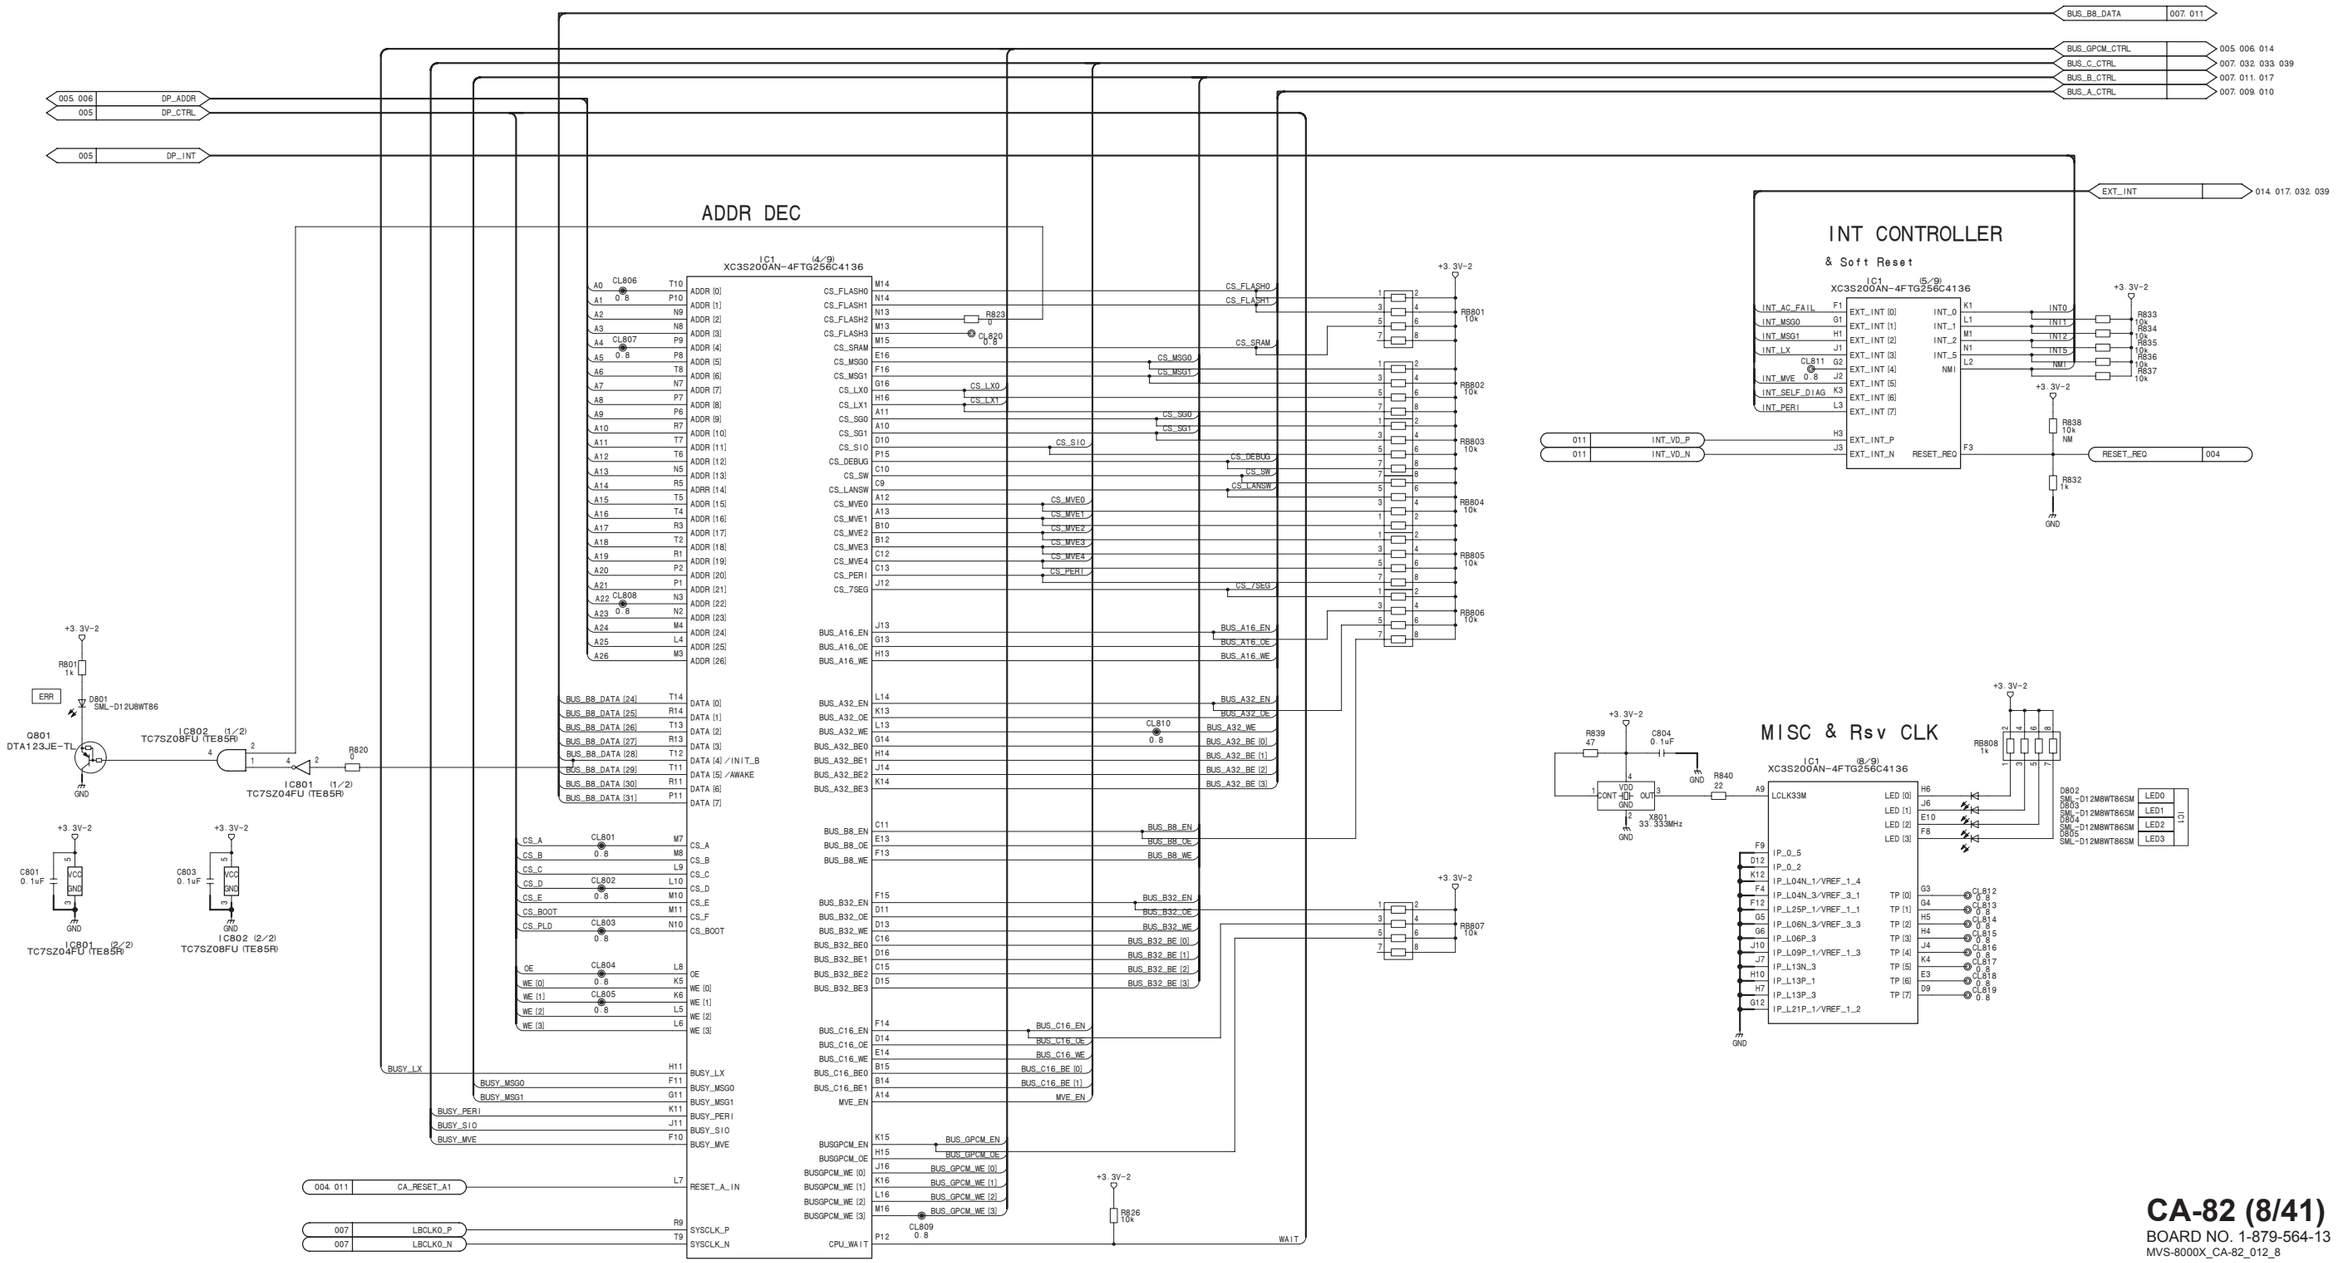

4-10

CA-82 (8/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_8

CA-82 (9/41)
SUFFIX: -13

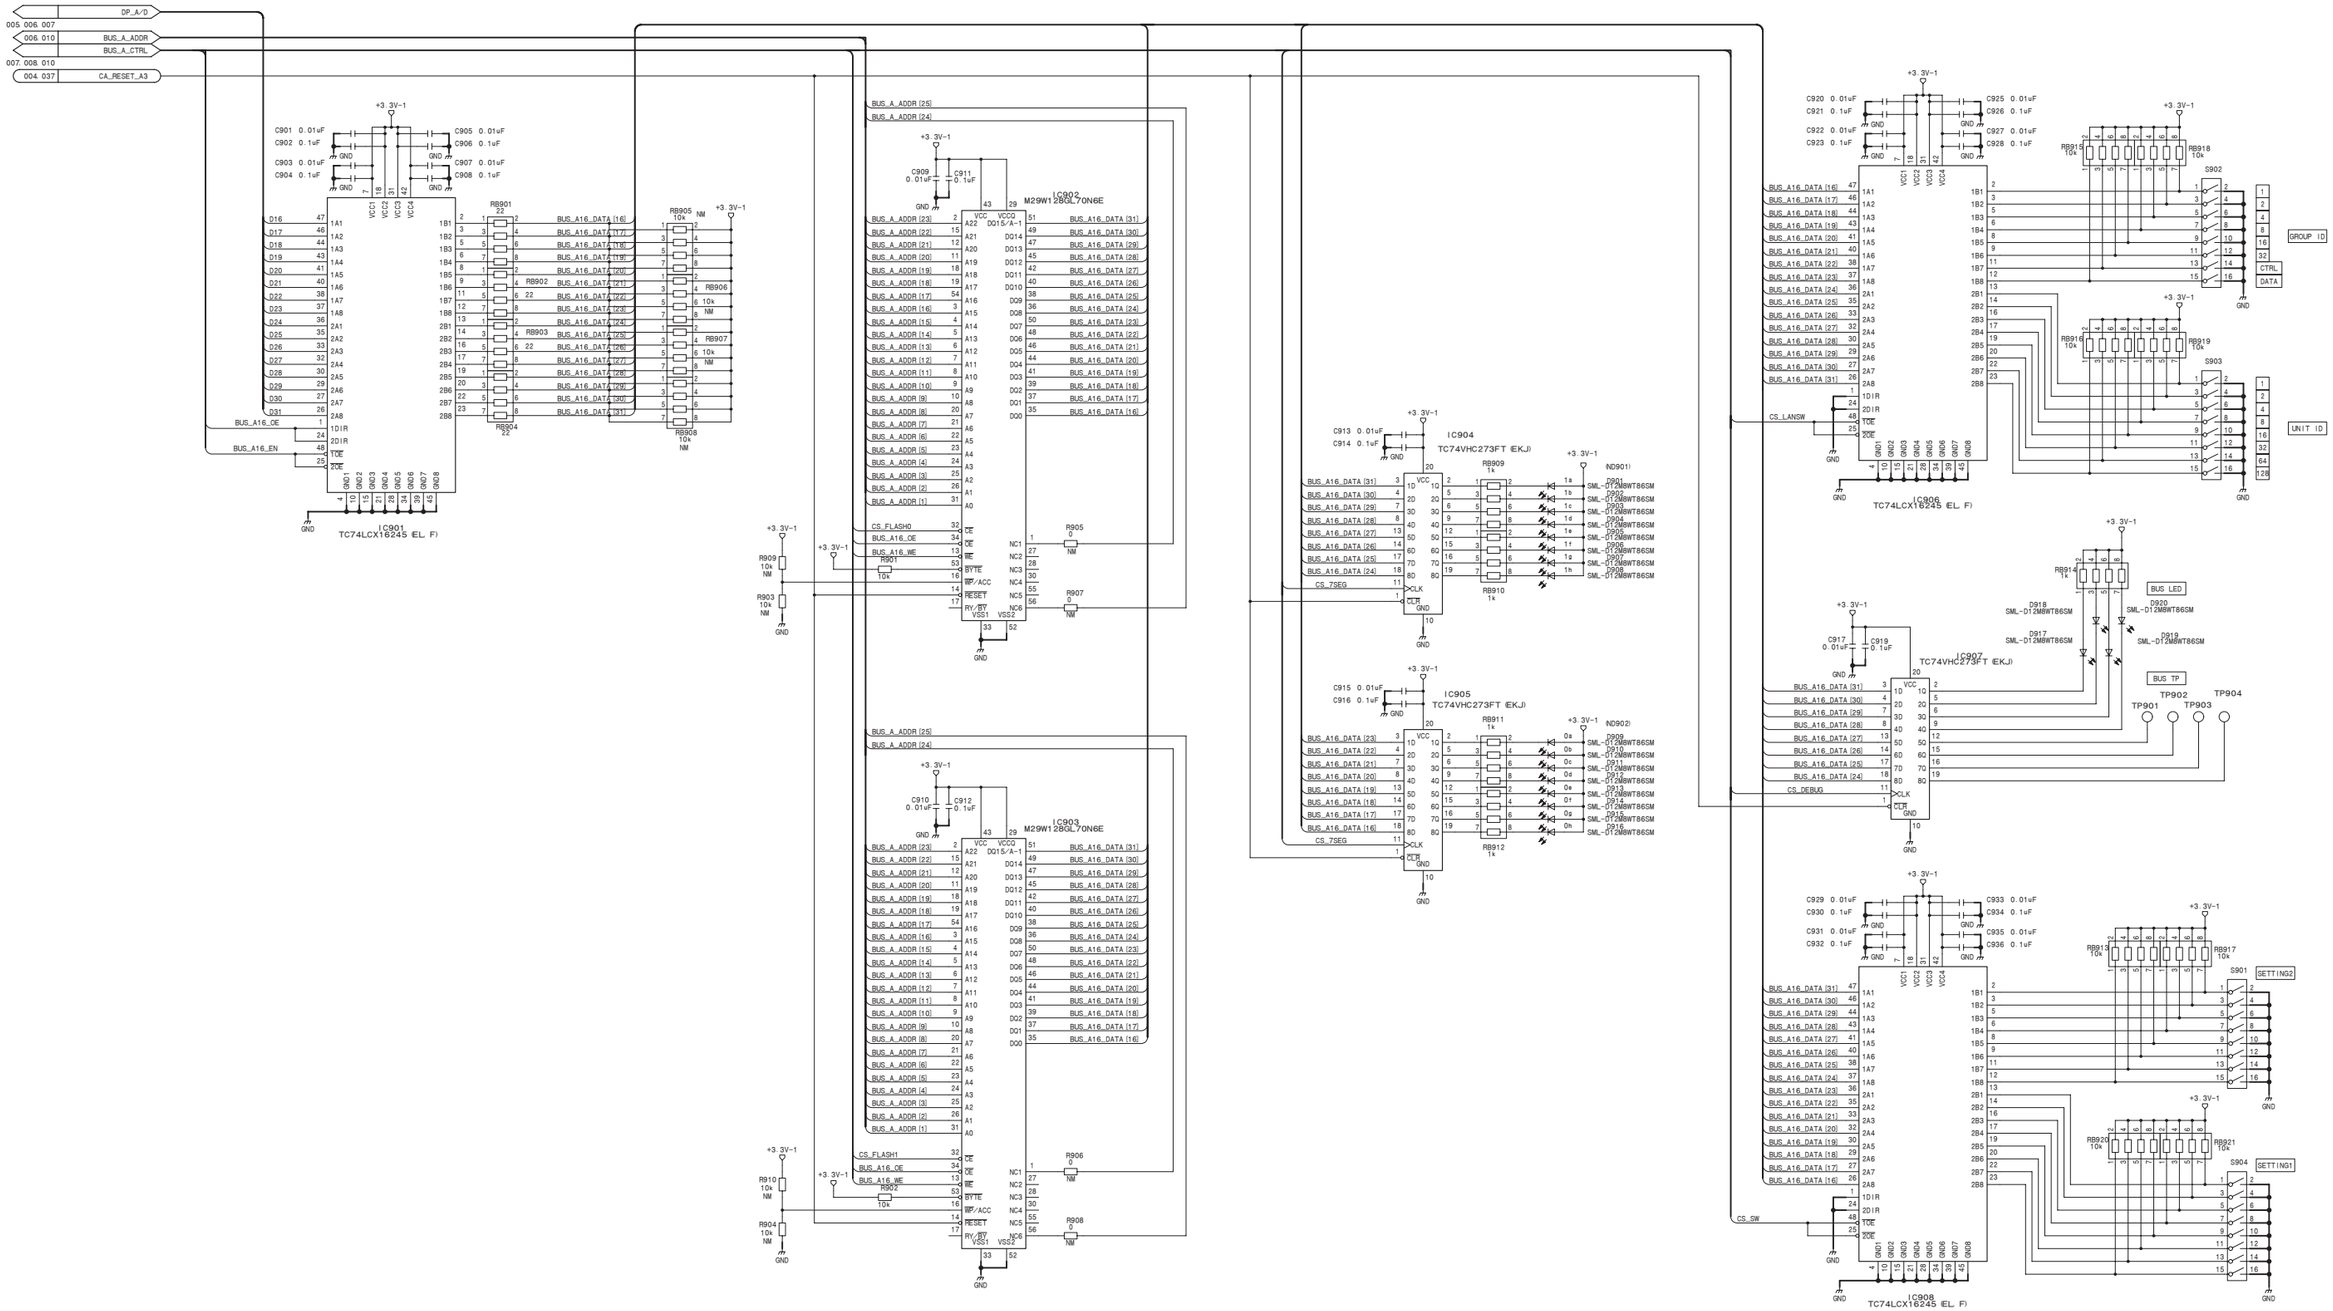

CA-82 (9/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_9

CA-82 (10/41)
SUFFIX: -13

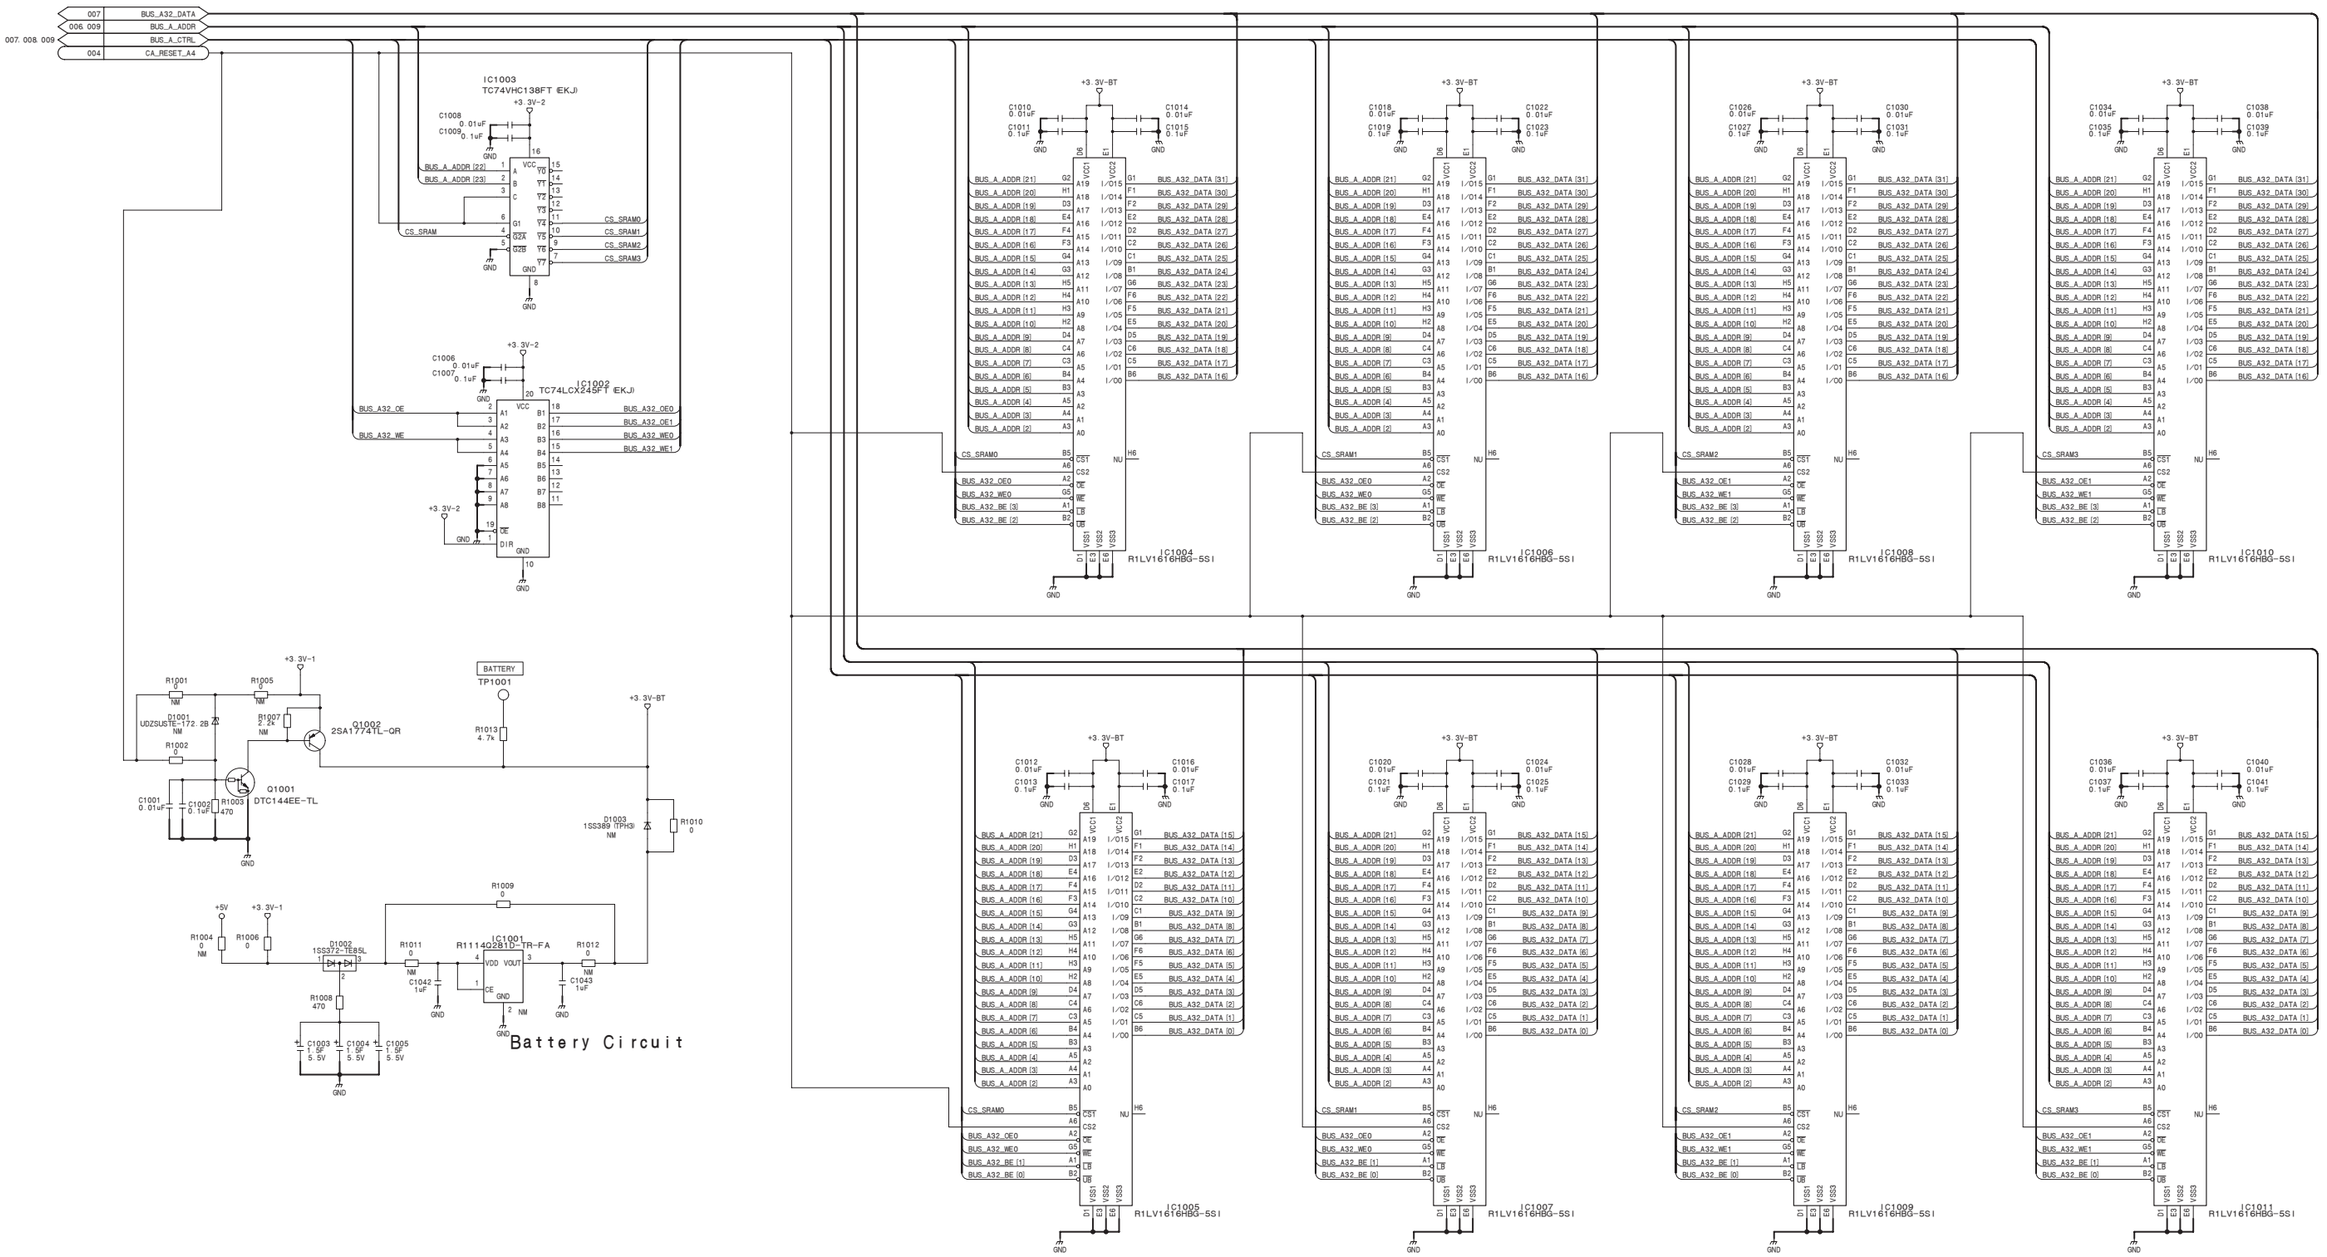

4-12

CA-82 (10/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_10

CA-82 (11/41)
SUFFIX: -13

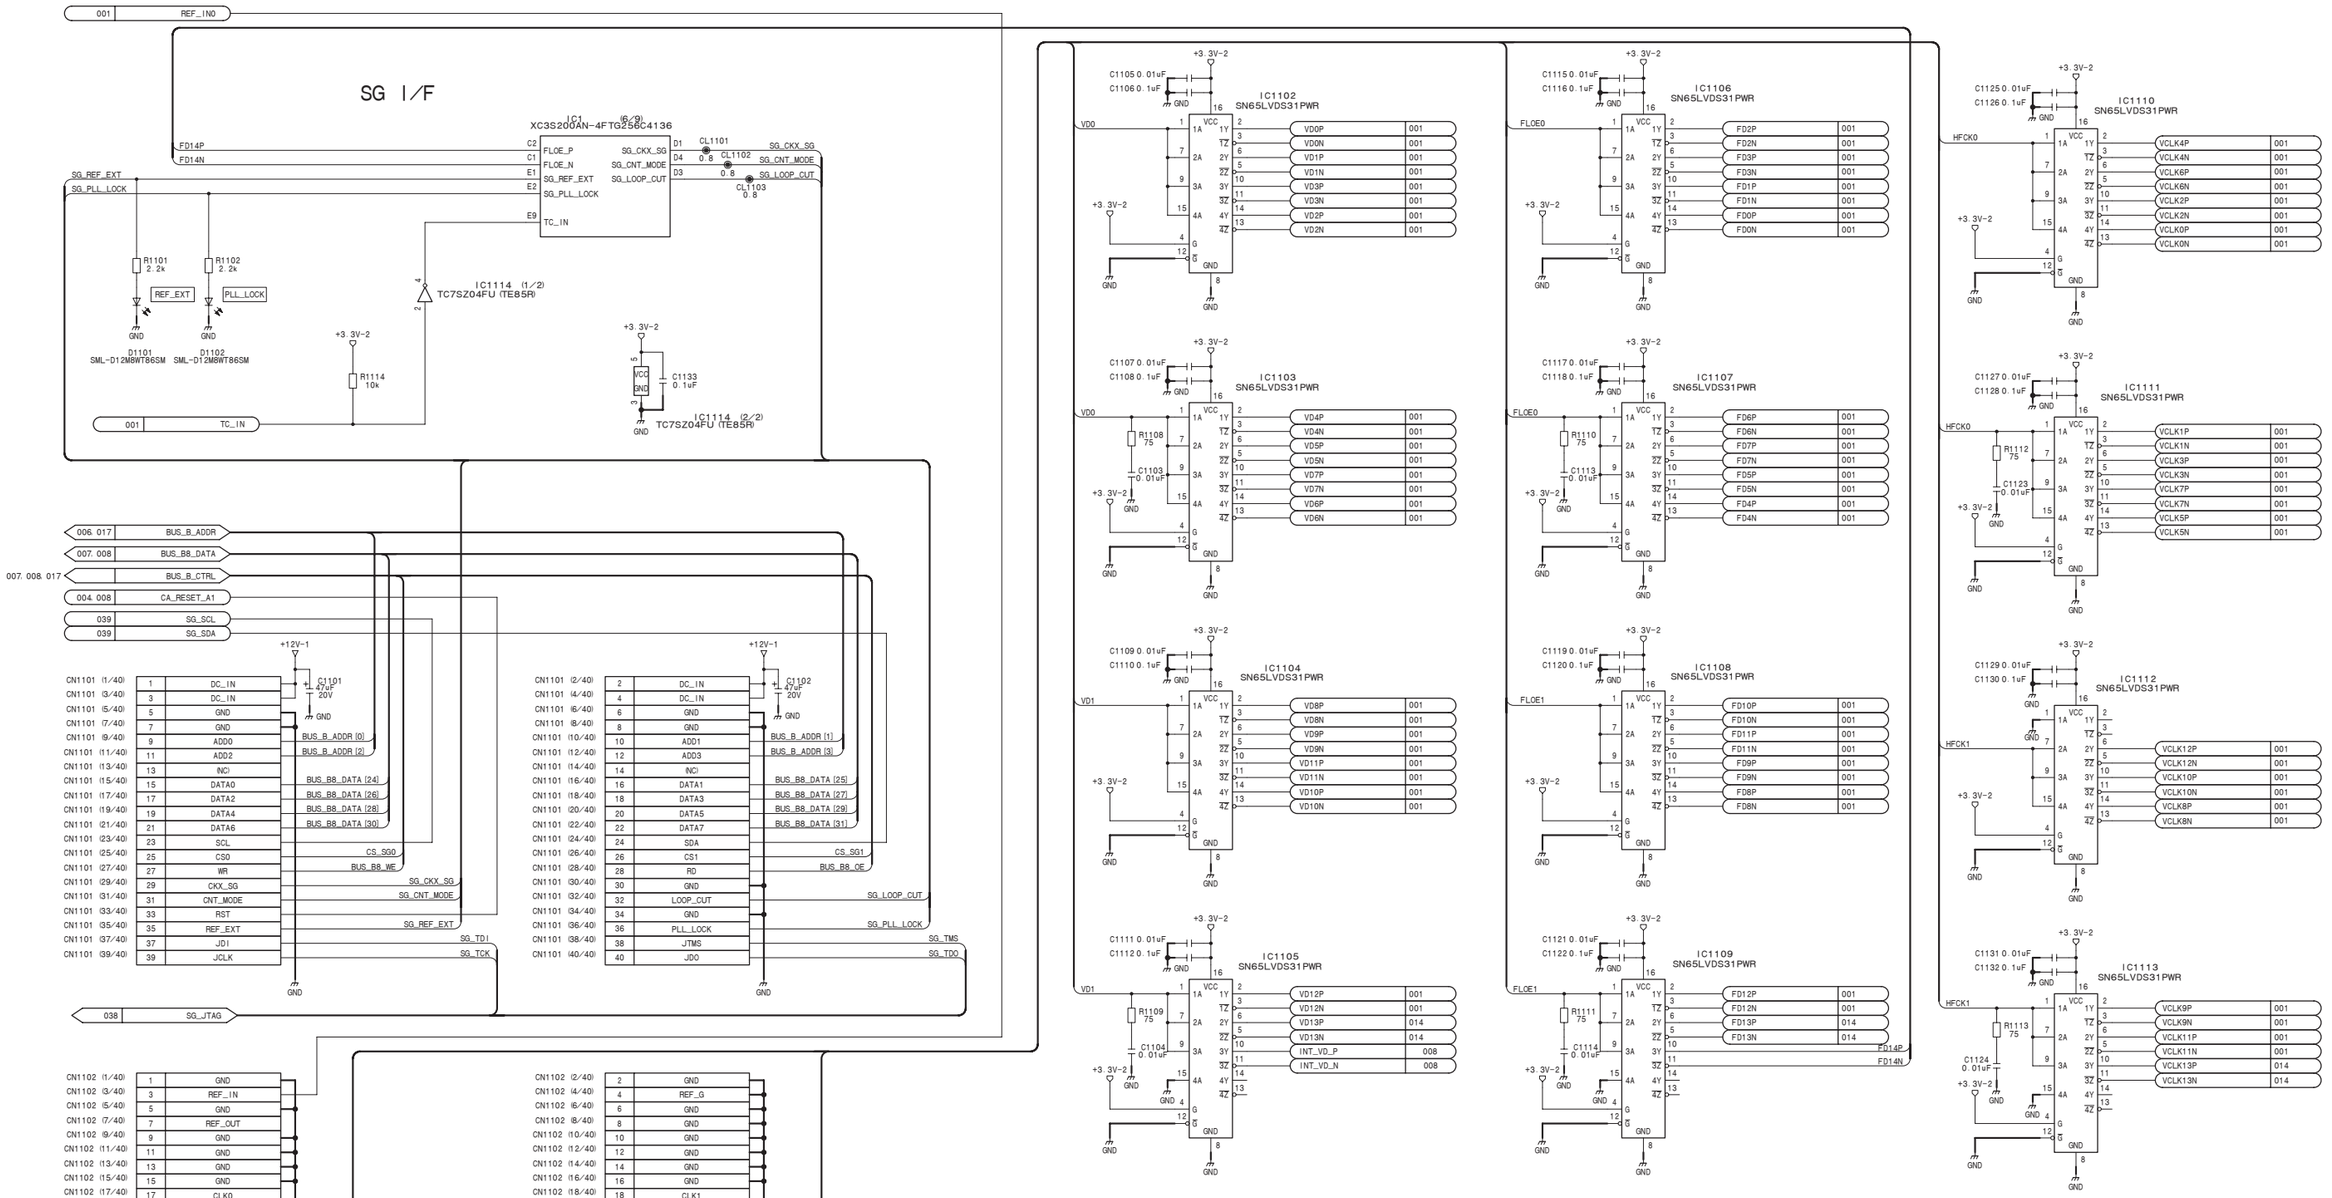

CA-82 (11/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_11

CA-82 (12/41)
SUFFIX: -13

XC3S200AN
In System Flash Config
2 1 0
MODE L H H
VS H H H

LX50 Mode 2 1 0
Master BPI-up L H L
Slave Serial H H H

IC1 Config

IC1 XC3S200AN-4FTG256C4136 (9/9)

IC2 Slave Serial Config

IC2 XC5VLX50-1FFG1153C (10) (1/16)

LX50

IC1206 XCF128XFTG64C

IC1 GND

IC1 XC3S200AN-4FTG256C4136 (2/9)

IC1 GND

IC1 XC3S200AN-4FTG256C4136 (2/9)

HUB Controller

IC1 XC3S200AN-4FTG256C4136 (7/9)

4-14

CA-82 (12/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_12

CA-82 (13/41) **SUFFIX: -13**

GND

IC2 (2/16) XC5VLX50-1FFG1153C (10)

VCCINT

IC2 (4/16) XC5VLX50-1FFG1153C (10)

VCCAUX

IC2 (3/16) XC5VLX50-1FFG1153C (10)

VCCIO

IC2 (5/16) XC5VLX50-1FFG1153C (10)

MISC & CLK

IC2 (13/16) XC5VLX50-1FFG1153C (10)

Neptune & PHY Modified Clock

4-15

CA-82 (13/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_13

CA-82 (14/41)
SUFFIX: -13

Timing Packet I/F

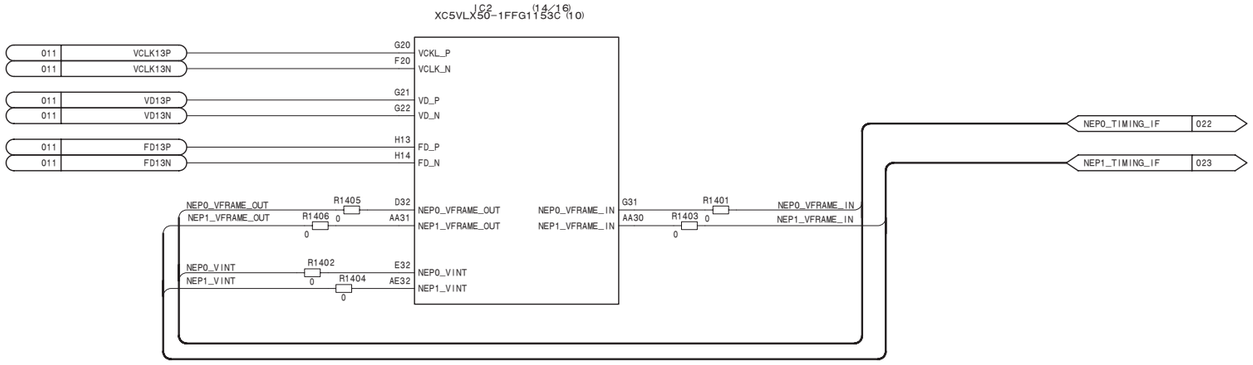

Local BUS I/F

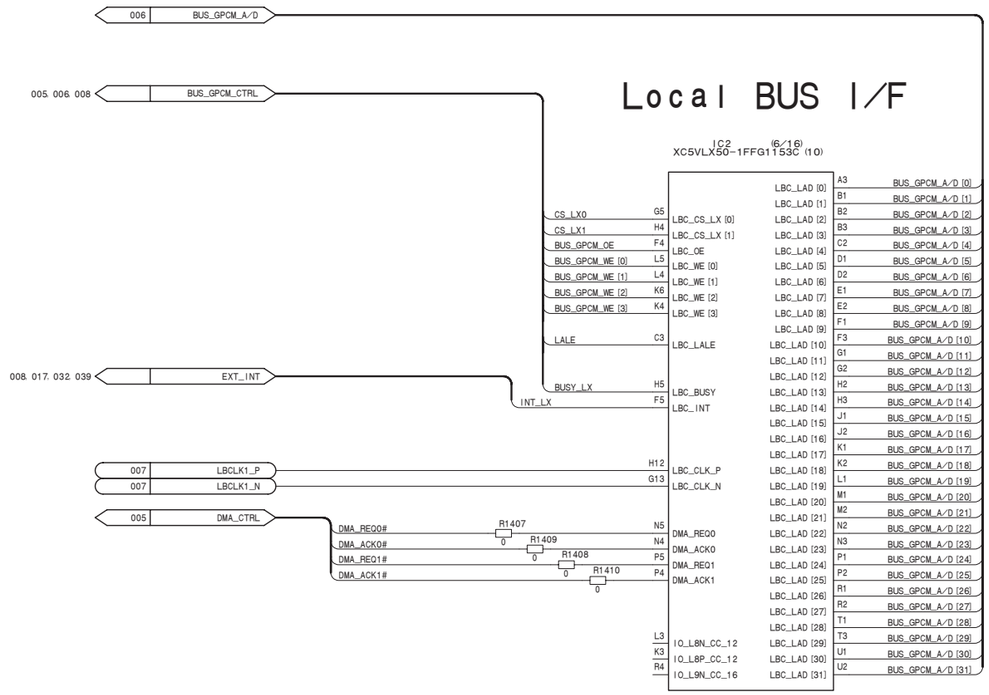

CA-82 (14/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_14

CA-82 (15/41)
SUFFIX: -13

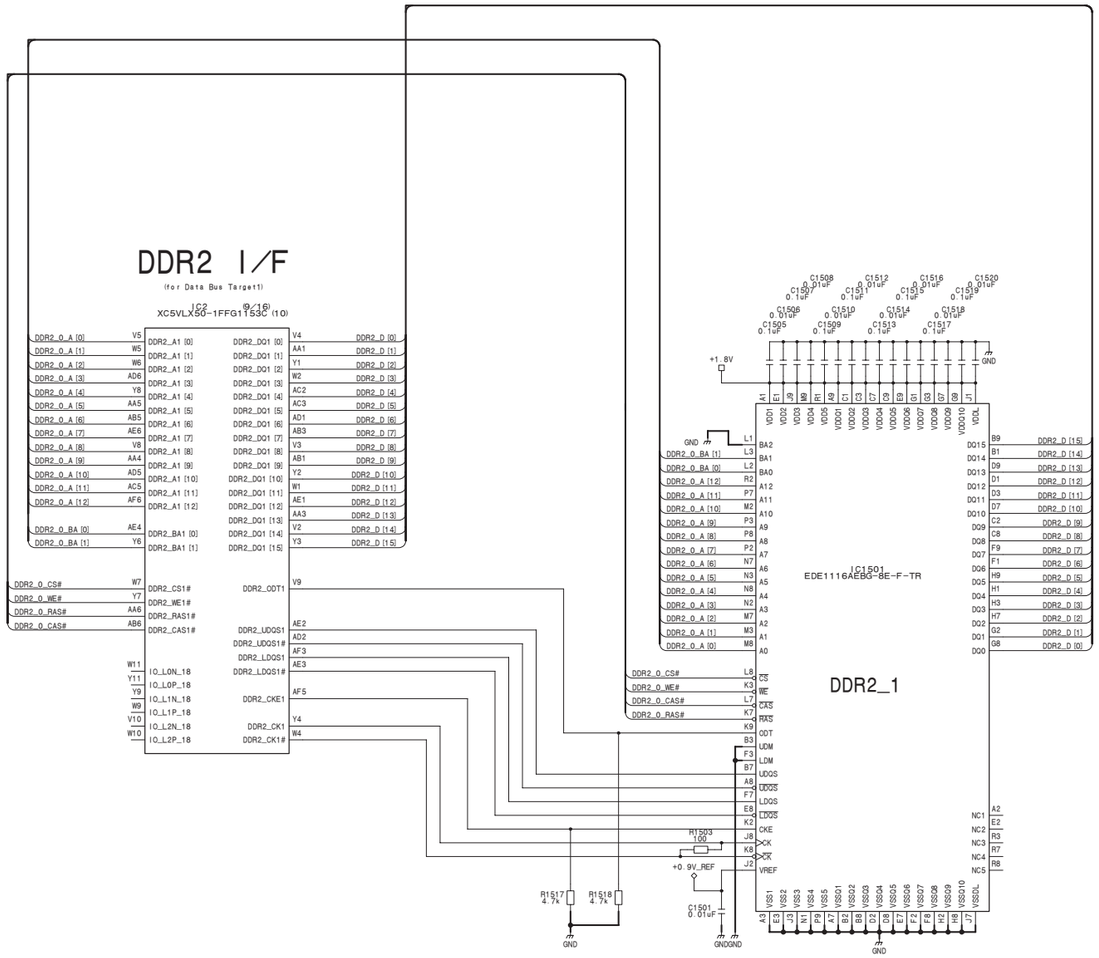

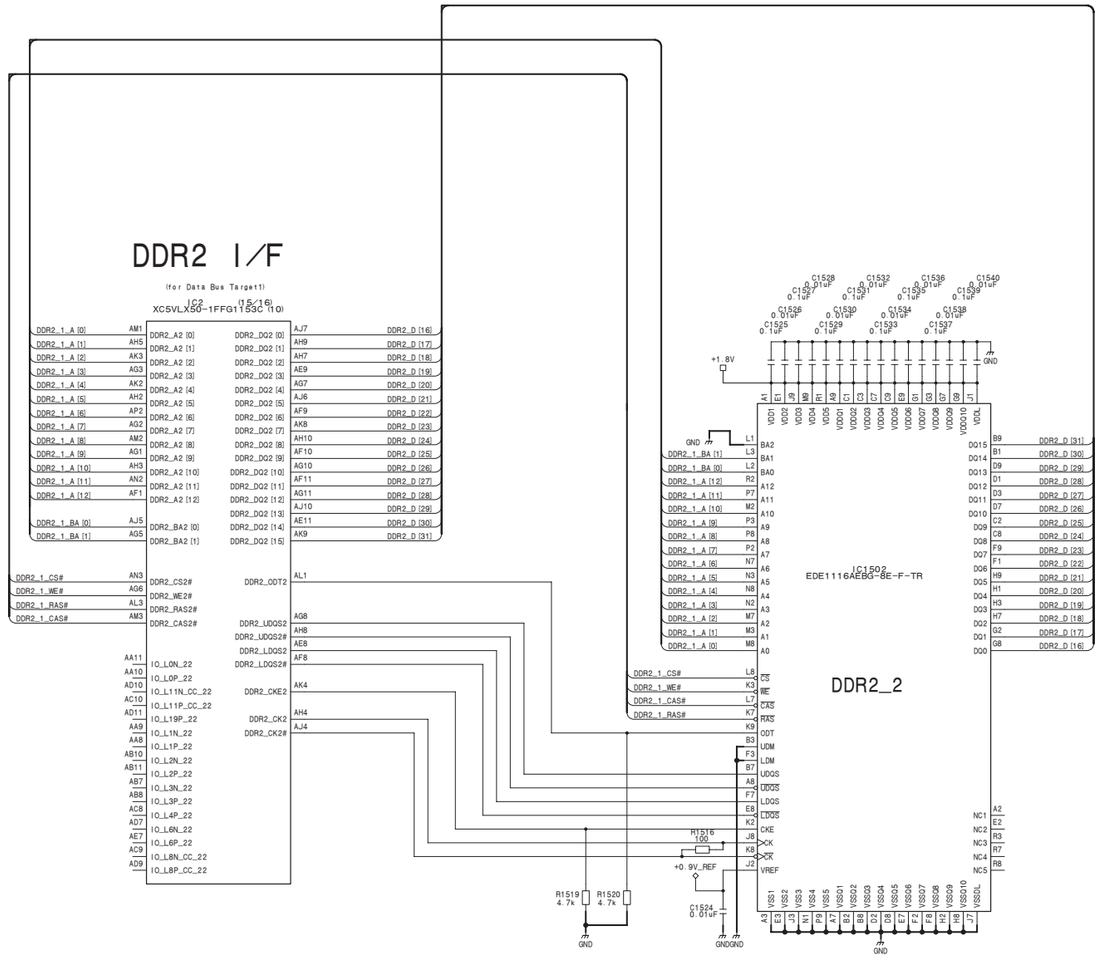

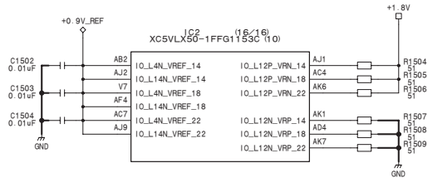

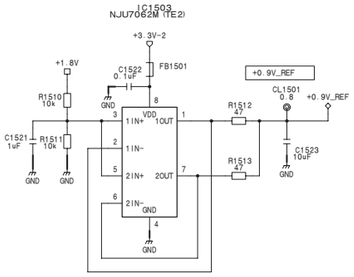

CA-82 (15/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_15

CA-82 (16/41)
SUFFIX: -13

NOT USED

IC2 (12/16)
XC5VLX50-1FFG1153C (10)

AA25	IO_L0P_21	IO_L13P_20	K7
AA26	IO_L0N_21	IO_L0P_20	K11
AA28	IO_L5N_21	IO_L14N_VREF_19	K26
AA29	IO_L11P_CC_17	IO_L14P_19	K27
AB25	IO_L3P_21	IO_L13P_19	K28
AB26	IO_L3N_21	IO_L4P_15	K29
AC24	IO_L17N_21	IO_L11N_CC_SM14N_11	K32
AC25	IO_L17P_21	IO_L4P_16	L6
AC27	IO_L1N_21	IO_L8N_CC_20	L9
AD24	IO_L19P_21	IO_L4P_20	L11
AD25	IO_L18N_21	IO_L0N_19	L24
AD29	IO_L15N_17	IO_L1P_19	L25
AD30	IO_L13P_17	IO_L4N_VREF_15	L29
AD31	IO_L12P_VRN_17	IO_L7P_15	L30
AE24	IO_L19N_21	IO_L13P_12	M3
AF14	IO_L5N_GC_4	IO_L6P_16	M5
AF18	IO_L9N_CC_GC_4	IO_L4N_VREF_16	M6
AF19	IO_L8N_CC_GC_4	IO_L15N_20	M7
AF20	IO_L8P_CC_GC_4	IO_L6P_20	M11
AF24	IO_L13P_21	IO_L12N_VRP_19	M27
AF25	IO_L15P_21	IO_L15P_19	M28
AG16	IO_L7N_GC_VRP_4	IO_L16N_20	N7
AG17	IO_L7P_GC_VRN_4	IO_L17P_20	N9
AG25	IO_L13N_21	IO_L18N_19	N25
AG26	IO_L14N_VREF_21	IO_L12P_VRN_19	N27
AG30	IO_L19N_17	IO_L15N_19	N28
AG31	IO_L14N_VREF_17	IO_L11N_CC_16	P6
AG33	IO_L12P_VRN_13	IO_L16P_20	P7
AH19	IO_L6P_GC_4	IO_L18P_20	P9
AH25	IO_L12N_VRP_21	IO_L19P_20	P11
AH27	IO_L11P_CC_21	IO_L18P_19	P25
AJ19	IO_L4N_GC_VREF_4	IO_L16P_19	P26
AJ25	IO_L12P_VRN_21	IO_L16N_19	P27
AK19	IO_L4P_GC_4	IO_L15P_SM13P_11	P32
E3	IO_L4P_12	IO_L14N_VREF_12	R3
E4	IO_L3P_16	IO_L14P_16	R6
F8	IO_L7N_20	IO_L12N_VRP_16	R8
G3	IO_L6P_12	IO_L12P_VRN_16	R9
G7	IO_L14N_VREF_20	IO_L17P_16	R11
G25	IO_L5P_19	IO_L17P_15	R26
G26	IO_L5N_19	IO_L12P_VRN_15	R28
G30	IO_L1P_15	IO_L12N_VRP_15	R29
H7	IO_L12P_VRN_20	IO_L13N_15	R31
H15	IO_L4N_GC_VREF_3	IO_L10N_CC_16	T4
H18	IO_L0P_CC_GC_3	IO_L13N_16	T5
H19	IO_L1P_CC_GC_3	IO_L17N_16	T10
H20	IO_L1N_CC_GC_3	IO_L19N_16	T11
H23	IO_L9N_GC_3	IO_L19N_15	T25
J4	IO_L5N_16	IO_L18N_15	T26
J5	IO_L2P_16	IO_L19P_12	U3
J6	IO_L0P_16	IO_L10P_CC_16	U5
J7	IO_L13N_20	IO_L13P_16	U6
J9	IO_L2N_20	IO_L19P_15	U25
J11	IO_L0N_20	IO_L18P_15	U26
J15	IO_L2N_GC_VRP_3	IO_L2P_17	V25
J16	IO_L2P_GC_VRN_3	IO_L5N_17	V27
J17	IO_L0N_CC_GC_3	IO_L5P_17	V28
J21	IO_L3N_GC_3	IO_L4P_17	V30
J26	IO_L4N_VREF_19	IO_L2N_17	W25

NC PIN

IC2 (11/16)
XC5VLX50-1FFG1153C (10)

B20	NC36	NC45	B31
A14	NC9	NC46	C4
AL30	NC172	NC210	AN22
AL6	NC153	NC224	AP11
D14	NC76	NC114	G12
AH23	NC128	NC142	AK13
C20	NC59	NC88	D29
A15	NC10	NC50	C9
AL29	NC171	NC185	AM18
AL5	NC152	NC183	AM16
D15	NC77	NC102	E24
AH22	NC127	NC161	AL16
A26	NC19	NC67	C30
A8	NC4	NC72	D9
AP25	NC235	NC207	AN18
AP10	NC223	NC182	AM15
H17	NC120	NC84	D24
AK16	NC144	NC160	AL15
B27	NC42	NC89	D30
B8	NC27	NC68	D4
AP26	NC236	NC232	AP21
AP9	NC222	NC204	AN14
G16	NC116	NC103	F11
AJ17	NC135	NC157	AL11
C25	NC63	NC90	D31
C10	NC51	NC69	D5
AL24	NC167	NC233	AP22
AM11	NC179	NC226	AP14
F21	NC110	NC113	G11
AK24	NC150	NC140	AK11
B25	NC40	NC44	B30
B10	NC28	NC71	D7
AL25	NC168	NC230	AP19
AN10	NC201	NC205	AN15
E21	NC99	NC119	G23
AL23	NC166	NC159	AL14
B28	NC43	NC22	A30
A6	NC3	NC70	D6
AP24	NC234	NC208	AN19
AN12	NC202	NC227	AP15
E14	NC94	NC112	F24
AK18	NC146	NC158	AL13
C29	NC66	NC15	A21
A5	NC2	NC53	C13
AN24	NC212	NC173	AL31
AM12	NC180	NC196	AN4
F15	NC106	NC91	E11
AK17	NC145	NC122	AH13
C27	NC64	NC37	B21
B7	NC26	NC54	C14
AM20	NC186	NC195	AM31
AM17	NC184	NC197	AN5
E23	NC101	NC75	D12
AL21	NC165	NC123	AH14
D26	NC86	NC57	C18
B6	NC25	NC55	C15
AM21	NC187	NC194	AM30
AN17	NC206	NC151	AL4
D22	NC83	NC79	D17
AL20	NC164	NC139	AJ24
A28	NC20	NC58	C19
A4	NC1	NC32	B15
AM23	NC189	NC217	AN30
AM13	NC181	NC174	AM5
F14	NC105	NC78	D16
AH18	NC126	NC129	AH24
A29	NC21	NC38	B22
B5	NC24	NC8	A13
AN23	NC211	NC240	AP31
AN13	NC203	NC218	AP4
G15	NC115	NC93	E13
AG18	NC121	NC124	AH15
D27	NC87	NC60	C22
C7	NC48	NC31	B13
AP20	NC231	NC239	AP30
AP17	NC229	NC219	AP5
F23	NC111	NC92	E12
AL19	NC163	NC132	AJ14
C28	NC65	NC12	A18
C8	NC49	NC11	A16
AN20	NC209	NC170	AL28
AP16	NC228	NC155	AL9
E22	NC100	NC108	F18
AL18	NC162	NC137	AJ21
A31	NC23	NC35	B18
C5	NC47	NC33	B16
AM22	NC188	NC192	AM27
AP12	NC225	NC154	AL8
F13	NC104	NC109	F19
AK12	NC141	NC138	AJ22

B23 C12 AN29 AM6 E17 AJ12 C23 B12 AP29 AM7 E18 AJ11 A20 C17 AN27 AM7 AK21 A19 B17 AP27 AM8 D19 AJ20 K24 B11 AM28 AN8 F16 AJ15 NC39 NC52 NC216 NC175 NC96 NC131 NC61 NC30 NC238 NC198 NC97 NC130 NC14 NC56 NC214 NC176 NC98 NC147 NC13 NC34 NC237 NC177 NC80 NC136 NC17 NC29 NC193 NC190 NC107 NC133

A23 A11 AN28 AN9 E16 AK14 D25 D10 AM25 AL10 D20 AK23 C24 D11 AN25 AM10 D21 AK22 A25 A9 AL26 AP6 G17 AH17 B26 A10 AM26 AP7 G18 AJ16 NC16 NC7 NC215 NC200 NC95 NC143 NC85 NC73 NC190 NC156 NC81 NC149 NC82 NC74 NC213 NC178 NC82 NC148 NC18 NC5 NC169 NC220 NC117 NC125 NC41 NC6 NC191 NC221 NC118 NC134

CA-82 (16/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_16

4-18

A B C D E F G H

CA-82 (17/41)
SUFFIX: -13

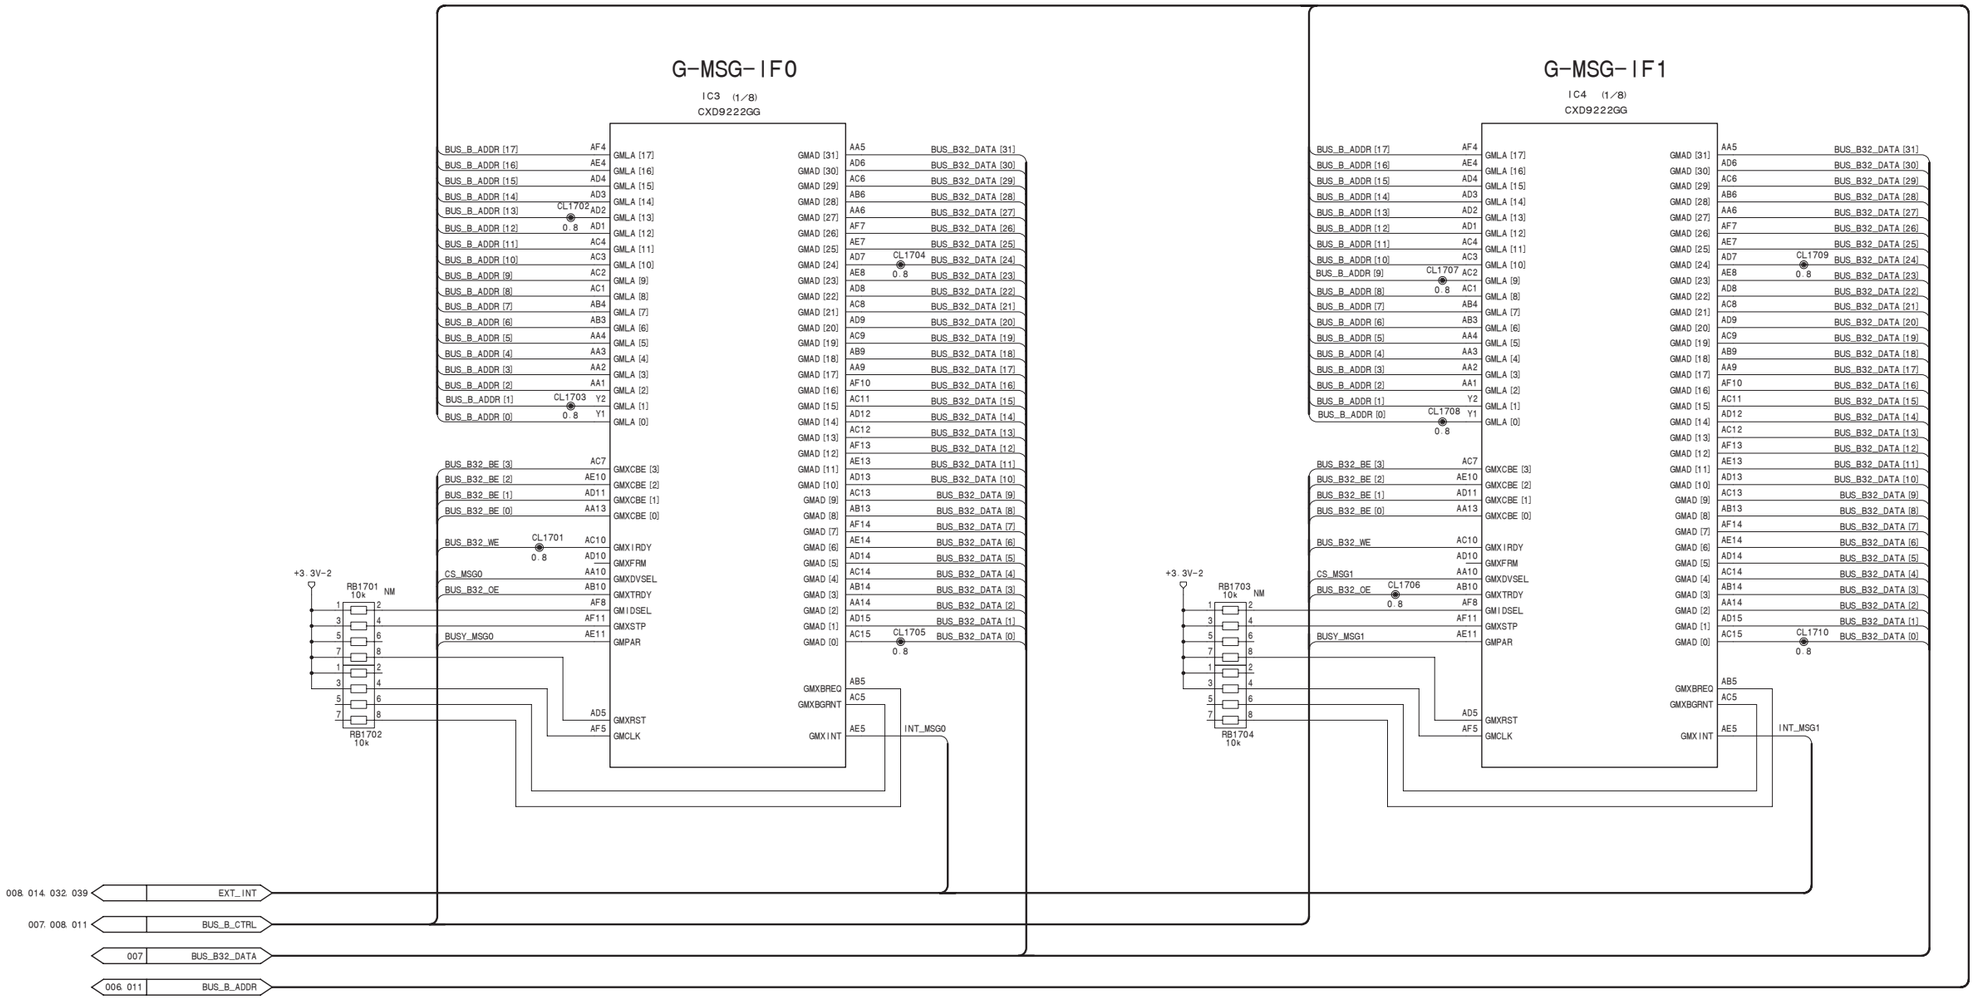

CA-82 (17/41)

BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_17

CA-82 (18/41)
SUFFIX: -13

LX50 DATA0 I/F

IC2 XC5VLX50-1FFG1153C (7/16) (10)

NEP0_GRD0 P30 — NEP0_GRD [0] — NEP0_GWD [0] — B33 — NEP0_GWD0
NEP0_GRD1 N33 — NEP0_GRD [1] — NEP0_GWD [1] — B32 — NEP0_GWD1
NEP0_GRD2 N34 — NEP0_GRD [2] — NEP0_GWD [2] — C34 — NEP0_GWD2
NEP0_GRD3 P34 — NEP0_GRD [3] — NEP0_GWD [3] — E33 — NEP0_GWD3
NEP0_GRD4 R33 — NEP0_GRD [4] — NEP0_GWD [4] — F33 — NEP0_GWD4
NEP0_GRD5 R34 — NEP0_GRD [5] — NEP0_GWD [5] — G33 — NEP0_GWD5
NEP0_GRD6 T33 — NEP0_GRD [6] — NEP0_GWD [6] — H34 — NEP0_GWD6
NEP0_GRD7 T34 — NEP0_GRD [7] — NEP0_GWD [7] — G32 — NEP0_GWD7
NEP0_GRD8 T31 — NEP0_GRD [8] — NEP0_GWD [8] — C32 — NEP0_GWD8
NEP0_GRD9 T29 — NEP0_GRD [9] — NEP0_GWD [9] — C33 — NEP0_GWD9
NEP0_GRD10 T28 — NEP0_GRD [10] — NEP0_GWD [10] — D34 — NEP0_GWD10
NEP0_GRD11 U32 — NEP0_GRD [11] — NEP0_GWD [11] — E34 — NEP0_GWD11
NEP0_GRD12 U31 — NEP0_GRD [12] — NEP0_GWD [12] — F34 — NEP0_GWD12
NEP0_GRD13 U30 — NEP0_GRD [13] — NEP0_GWD [13] — H33 — NEP0_GWD13
NEP0_GRD14 U28 — NEP0_GRD [14] — NEP0_GWD [14] — J34 — NEP0_GWD14
NEP0_GRD15 U27 — NEP0_GRD [15] — NEP0_GWD [15] — J32 — NEP0_GWD15
NEP0_GRD16 R27 — NEP0_GRD [16] — NEP0_GWD [16] — E31 — NEP0_GWD16
NEP0_GRD17 K33 — NEP0_GRD [17] — NEP0_GWD [17] — E29 — NEP0_GWD17
NEP0_GRD18 U33 — NEP0_GRD [18] — NEP0_GWD [18] — F31 — NEP0_GWD18
NEP0_GRD19 T30 — NEP0_GRD [19] — NEP0_GWD [19] — F30 — NEP0_GWD19
NEP0_GRD20 R32 — NEP0_GRD [20] — NEP0_GWD [20] — F29 — NEP0_GWD20
NEP0_GRD21 P29 — NEP0_GRD [21] — NEP0_GWD [21] — H30 — NEP0_GWD21
NEP0_GRD22 M33 — NEP0_GRD [22] — NEP0_GWD [22] — H29 — NEP0_GWD22
NEP0_GRD23 M30 — NEP0_GRD [23] — NEP0_GWD [23] — J31 — NEP0_GWD23
NEP0_GRD24 P31 — NEP0_GRD [24] — NEP0_GWD [24] — J30 — NEP0_GWD24
NEP0_GRD25 N29 — NEP0_GRD [25] — NEP0_GWD [25] — J29 — NEP0_GWD25
NEP0_GRD26 N32 — NEP0_GRD [26] — NEP0_GWD [26] — E28 — NEP0_GWD26
NEP0_GRD27 N30 — NEP0_GRD [27] — NEP0_GWD [27] — E27 — NEP0_GWD27
NEP0_GRD28 M31 — NEP0_GRD [28] — NEP0_GWD [28] — E26 — NEP0_GWD28
NEP0_GRD29 L33 — NEP0_GRD [29] — NEP0_GWD [29] — F26 — NEP0_GWD29
NEP0_GRD30 L34 — NEP0_GRD [30] — NEP0_GWD [30] — F25 — NEP0_GWD30
NEP0_GRD31 K34 — NEP0_GRD [31] — NEP0_GWD [31] — F28 — NEP0_GWD31

NEP0_GWGRNT — J24 — NEP0_GWBGRNT
NEP0_GWHLE — H24 — NEP0_GWHLE
NEP0_GRHLE L28 — NEP0_GRHLE — NEP0_GWRDY — H27 — NEP0_GWRDY
NEP0_GRRDY M25 — NEP0_GRRDY — NEP0_GWREQ — H28 — NEP0_GWREQ
NEP0_GRVLD M26 — NEP0_GRVLD — NEP0_GWTRM — J27 — NEP0_GWTRM
NEP0_GWVLD — H25 — NEP0_GWVLD
NEP0_GWBREQ — J25 — NEP0_GWBREQ

J20 — NEP0_GDCRTN — NEP0_CDCLK — M32 — NEP0_GDCLK
NEP0_GDACT — L26 — NEP0_GDACT

H32 I/O_L4N_VREF_11 — NEP0_RESET_L — K24 — NEP0_RESET — 022
G27 I/O_L8P_CC_19
L31 I/O_L9N_CC_15
G28 I/O_L9N_CC_19
K31 I/O_L9P_CC_15

R1801 33

004 012 019 — CA_RESET_B0

FLASH0

IC1801 NM
MX29LV640EBTI-70G

+3.3V-2
C1801 0.1uF NM
GND

NEP0_GRD22 13 — A21 — DQ15/A-1 37 — VCC
NEP0_GRD21 10 — A20 — DQ14 45 — NEP0_GWD15
NEP0_GRD20 9 — A19 — DQ13 43 — NEP0_GWD14
NEP0_GRD19 16 — A18 — DQ12 41 — NEP0_GWD13
NEP0_GRD18 17 — A17 — DQ11 39 — NEP0_GWD12
NEP0_GRD17 48 — A16 — DQ10 36 — NEP0_GWD11
NEP0_GRD16 1 — A15 — DQ9 34 — NEP0_GWD10
NEP0_GRD15 2 — A14 — DQ8 32 — NEP0_GWD9
NEP0_GRD14 3 — A13 — DQ7 30 — NEP0_GWD8
NEP0_GRD13 4 — A12 — DQ6 44 — NEP0_GWD7
NEP0_GRD12 5 — A11 — DQ5 42 — NEP0_GWD6
NEP0_GRD11 6 — A10 — DQ4 40 — NEP0_GWD5
NEP0_GRD10 7 — A9 — DQ3 38 — NEP0_GWD4
NEP0_GRD9 8 — A8 — DQ2 35 — NEP0_GWD3
NEP0_GRD8 18 — A7 — DQ1 33 — NEP0_GWD2
NEP0_GRD7 19 — A6 — DQ0 31 — NEP0_GWD1
NEP0_GRD6 20 — A5 — 29 — NEP0_GWD0
NEP0_GRD5 21 — A4
NEP0_GRD4 22 — A3
NEP0_GRD3 23 — A2
NEP0_GRD2 24 — A1
NEP0_GRD1 25 — A0

NEP0_GDACT 26 — CE
NEP0_GWHLE 28 — OE
NEP0_GWBREQ 11 — WE
47 — BYTE
14 — WP/ACC
12 — RESET
15 — RY/BY
VSS1 27 — VSS2 46

+3.3V-2
R1813 0 NM
GND GND

G-DATA-IF0

IC3 (2/8) CXD9222GG

RB1801 33: NEP0_GWD26 — GWO_D26; NEP0_GWD30 — GWO_D30; NEP0_GWD27 — GWO_D27; NEP0_GWD31 — GWO_D31
RB1802 33: NEP0_GWD24 — GWO_D24; NEP0_GWD28 — GWO_D28; NEP0_GWD25 — GWO_D25; NEP0_GWD29 — GWO_D29
RB1803 33: NEP0_GWD20 — GWO_D20; NEP0_GWD21 — GWO_D21; NEP0_GWD22 — GWO_D22; NEP0_GWD23 — GWO_D23
R1803 33: NEP0_GWD19
R1804 33: NEP0_GWD18
R1805 33: NEP0_GWD17
R1806 33: NEP0_GWD16
R1807 33: NEP0_GWD15
R1808 33: NEP0_GWD14
R1809 33: NEP0_GWD7
RB1804 33: NEP0_GWD8 — GWO_D8; NEP0_GWD1 — GWO_D1; NEP0_GWD9 — GWO_D9; NEP0_GWD2 — GWO_D2
RB1805 33: NEP0_GWD10 — GWO_D10; NEP0_GWD3 — GWO_D3; NEP0_GWD11 — GWO_D11; NEP0_GWD4 — GWO_D4
RB1806 33: NEP0_GWTRM — GWO_TRM; NEP0_GWVLD — GWO_VLD; NEP0_GWD0 — GWO_D0
RB1807 33: NEP0_GWREQ — GWO_REQ; NEP0_GWBGRNT — GWO_B_GRNT; NEP0_GWBREQ — GWO_B_REC; NEP0_GWHLE — GWO_HLE
RB1808 33: NEP0_GWD13 — GWO_D13; NEP0_GWD6 — GWO_D6; NEP0_GWD12 — GWO_D12; NEP0_GWD5 — GWO_D5
R1810 33: NEP0_GDACT
R1811 33: NEP0_GDCLK

GWO_D31 AF23 — GWO_D30 AF22 — GWO_D29 AF20 — GWO_D28 AF19 — GWO_D27 AE23 — GWO_D26 AE22 — GWO_D25 AE20 — GWO_D24 AE19 — GWO_D23 AD26 — GWO_D22 AD25 — GWO_D21 AD24 — GWO_D20 AD23 — AD22 — AD21 — AD20 — AD19 — AC26 — AC23 — GWO_D13 AC19 — GWO_D12 AC20 — GWO_D11 AB22 — GWO_D10 AB23 — GWO_D9 AC24 — GWO_D8 AB24 — AC25 — GWO_D6 AC21 — GWO_D5 AC22 — GWO_D4 AB21 — GWO_D3 AA21 — GWO_D2 AA22 — GWO_D1 AA23 — GWO_D0 AA24

GWO_B_REC AA26 — GWBGRNT
GWO_B_GRNT Y25
GWO_HLE AA25 — GWHLE
Y23 — GWRDY
GWO_REQ Y26 — GWREQ
GWO_VLD Y24 — GWVLD
GWO_TRM W24 — GWTRM
V21 — GDACT
R26 — GDCLK
W23 — ID [1]
V24 — ID [0]

GWD [31] — GWD [30] — GWD [29] — GWD [28] — GWD [27] — GWD [26] — GWD [25] — GWD [24] — GWD [23] — GWD [22] — GWD [21] — GWD [20] — GWD [19] — GWD [18] — GWD [17] — GWD [16] — GWD [15] — GWD [14] — GWD [13] — GWD [12] — GWD [11] — GWD [10] — GWD [9] — GWD [8] — GWD [7] — GWD [6] — GWD [5] — GWD [4] — GWD [3] — GWD [2] — GWD [1] — GWD [0]

GWBREQ — GWBGRNT — GWHLE — GWRDY — GWREQ — GWVLD — GWTRM

GRD [31] — GRD [30] — GRD [29] — GRD [28] — GRD [27] — GRD [26] — GRD [25] — GRD [24] — GRD [23] — GRD [22] — GRD [21] — GRD [20] — GRD [19] — GRD [18] — GRD [17] — GRD [16] — GRD [15] — GRD [14] — GRD [13] — GRD [12] — GRD [11] — GRD [10] — GRD [9] — GRD [8] — GRD [7] — GRD [6] — GRD [5] — GRD [4] — GRD [3] — GRD [2] — GRD [1] — GRD [0]

V26 GRO_D31 — U26 GRO_D30 — U25 GRO_D29 — U24 GRO_D28 — U23 GRO_D27 — T24 GRO_D26 — T23 GRO_D25 — T22 GRO_D24 — T21 GRO_D23 — R25 GRO_D22 — R24 GRO_D21 — M24 GRO_D20 — M23 GRO_D19 — N23 GRO_D18 — N24 GRO_D17 — R23 GRO_D16 — N26 GRO_D15 — N25 GRO_D14 — K23 GRO_D13 — L24 GRO_D12 — M26 GRO_D11 — M25 GRO_D10 — L23 GRO_D9 — K24 GRO_D8 — M22 GRO_D7 — M21 GRO_D6 — P21 GRO_D5 — P22 GRO_D4 — K26 GRO_D3 — K25 GRO_D2 — P23 — P24 GRO_D0

GRHLE — V22 GRO_HLE
GRRDY — V25 GRO_RDY
GRVLD — V23 GRO_VLD

RB1815 33: GRO_RDY — NEP0_GRRDY; GRO_D31 — NEP0_GRD31; GRO_D29 — NEP0_GRD29; GRO_D30 — NEP0_GRD30
RB1816 33: GRO_D22 — NEP0_GRD22; GRO_D15 — NEP0_GRD15; GRO_D14 — NEP0_GRD14
RB1817 33: GRO_VLD — NEP0_GRVLD; GRO_D23 — NEP0_GRD23; GRO_HLE — NEP0_GRHLE
RB1809 33: GRO_D28 — NEP0_GRD28; GRO_D27 — NEP0_GRD27; GRO_D26 — NEP0_GRD26; GRO_D25 — NEP0_GRD25
RB1810 33: GRO_D17 — NEP0_GRD17; GRO_D18 — NEP0_GRD18; GRO_D20 — NEP0_GRD20; GRO_D19 — NEP0_GRD19
RB1811 33: GRO_D8 — NEP0_GRD8; GRO_D9 — NEP0_GRD9; GRO_D12 — NEP0_GRD12; GRO_D13 — NEP0_GRD13
RB1812 33: GRO_D2 — NEP0_GRD2; GRO_D3 — NEP0_GRD3; GRO_D10 — NEP0_GRD10; GRO_D11 — NEP0_GRD11
RB1813 33: GRO_D4 — NEP0_GRD4; GRO_D5 — NEP0_GRD5; GRO_D6 — NEP0_GRD6; GRO_D7 — NEP0_GRD7
RB1814 33: GRO_D21 — NEP0_GRD21; GRO_D24 — NEP0_GRD24; GRO_D0 — NEP0_GRD0; GRO_D16 — NEP0_GRD16
R1812 33: NEP0_GRD1

+1.2V-1
FB1801
C1802 0.1uF
C1803 1uF
PLLVDD11 K3 — PLLVSS1 K4 — PLLVDD10 J3 — PLLVSS0 J4
GND

+3.3V-2
R1816 0 NM
R1818 0 NM
R1817 0
R1819 0
GND

CA-82 (18/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_18

LX50 DATA1 I/F

IC2 (8/16)
XC5VLX50-1FFG1153C (10)

FLASH1

IC1901 NM
MX29LV640EBTI-70G
+3.3V-2

G-DATA-IF1

IC4 (2/8)
CXD9222GG

CA-82 (19/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_19

CA-82 (20/41)
SUFFIX: -13

MDDR0 (Network)

IC3 (4/8)
CXD9222GG

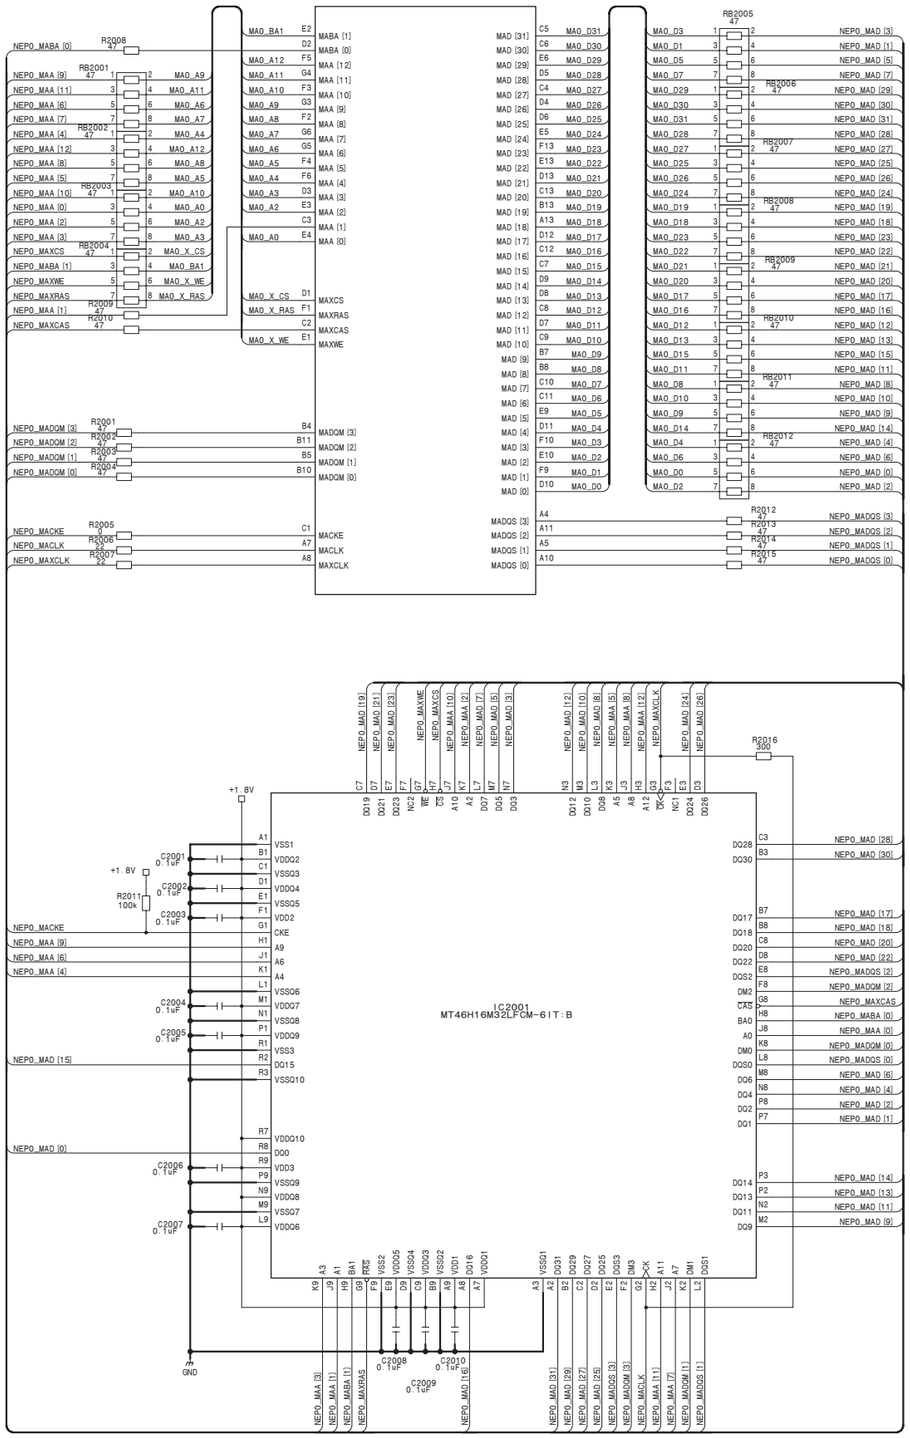

MDDR0 (Processor)

IC3 (5/8)
CXD9222GG

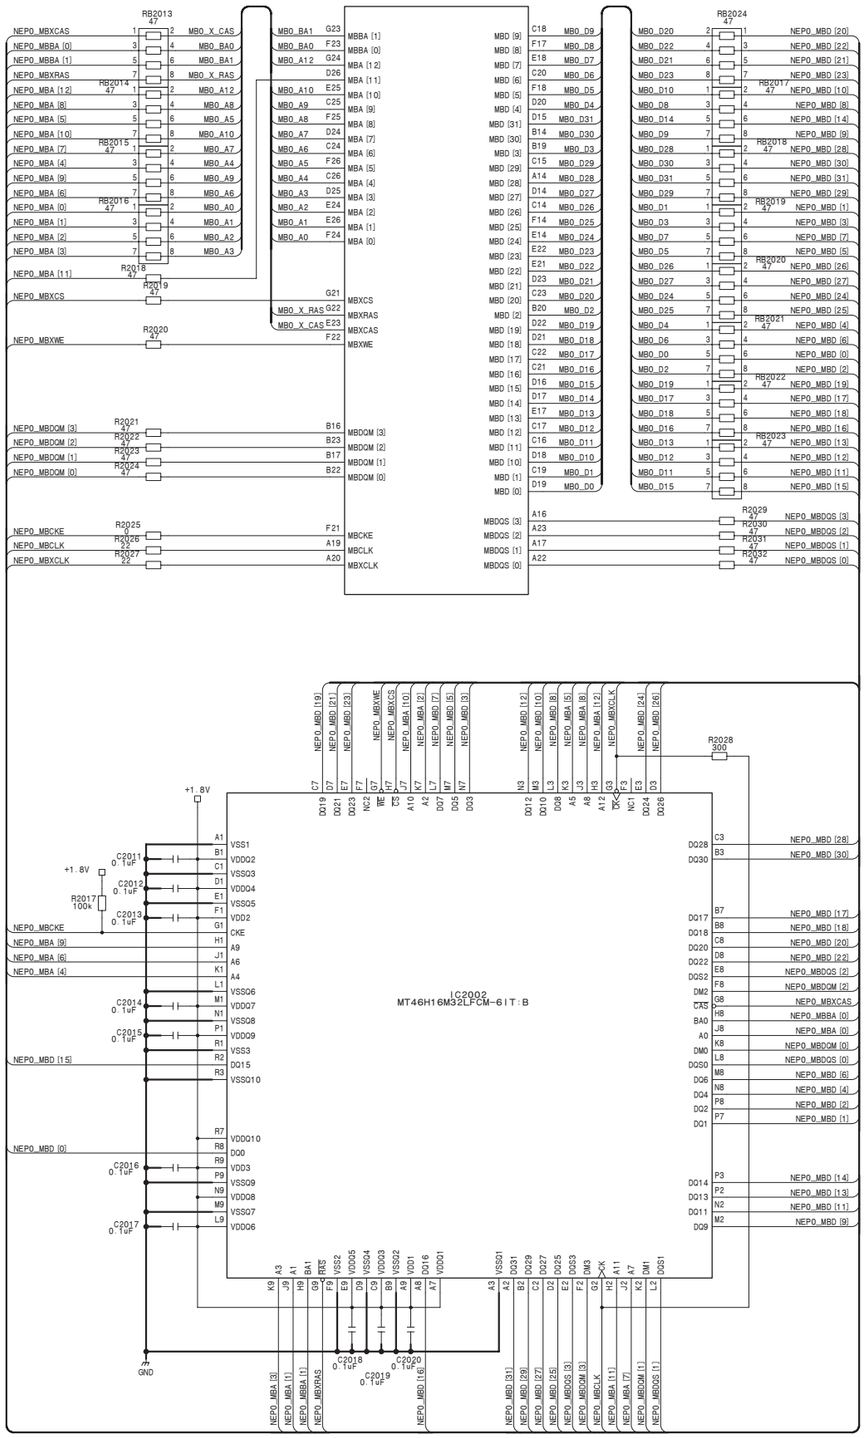

4-22

CA-82 (20/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_20

CA-82 (21/41)
SUFFIX: -13

MDDR1
(Network)
IC4 (4/8)
CXD9222GG

MDDR1
(Processor)
IC4 (5/8)
CXD9222GG

IC2101
MT46H16M32LFCM-6 IT:B

IC2102
MT46H16M32LFCM-6 IT:B

CA-82 (21/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_21

CA-82 (22/41)
SUFFIX: -13

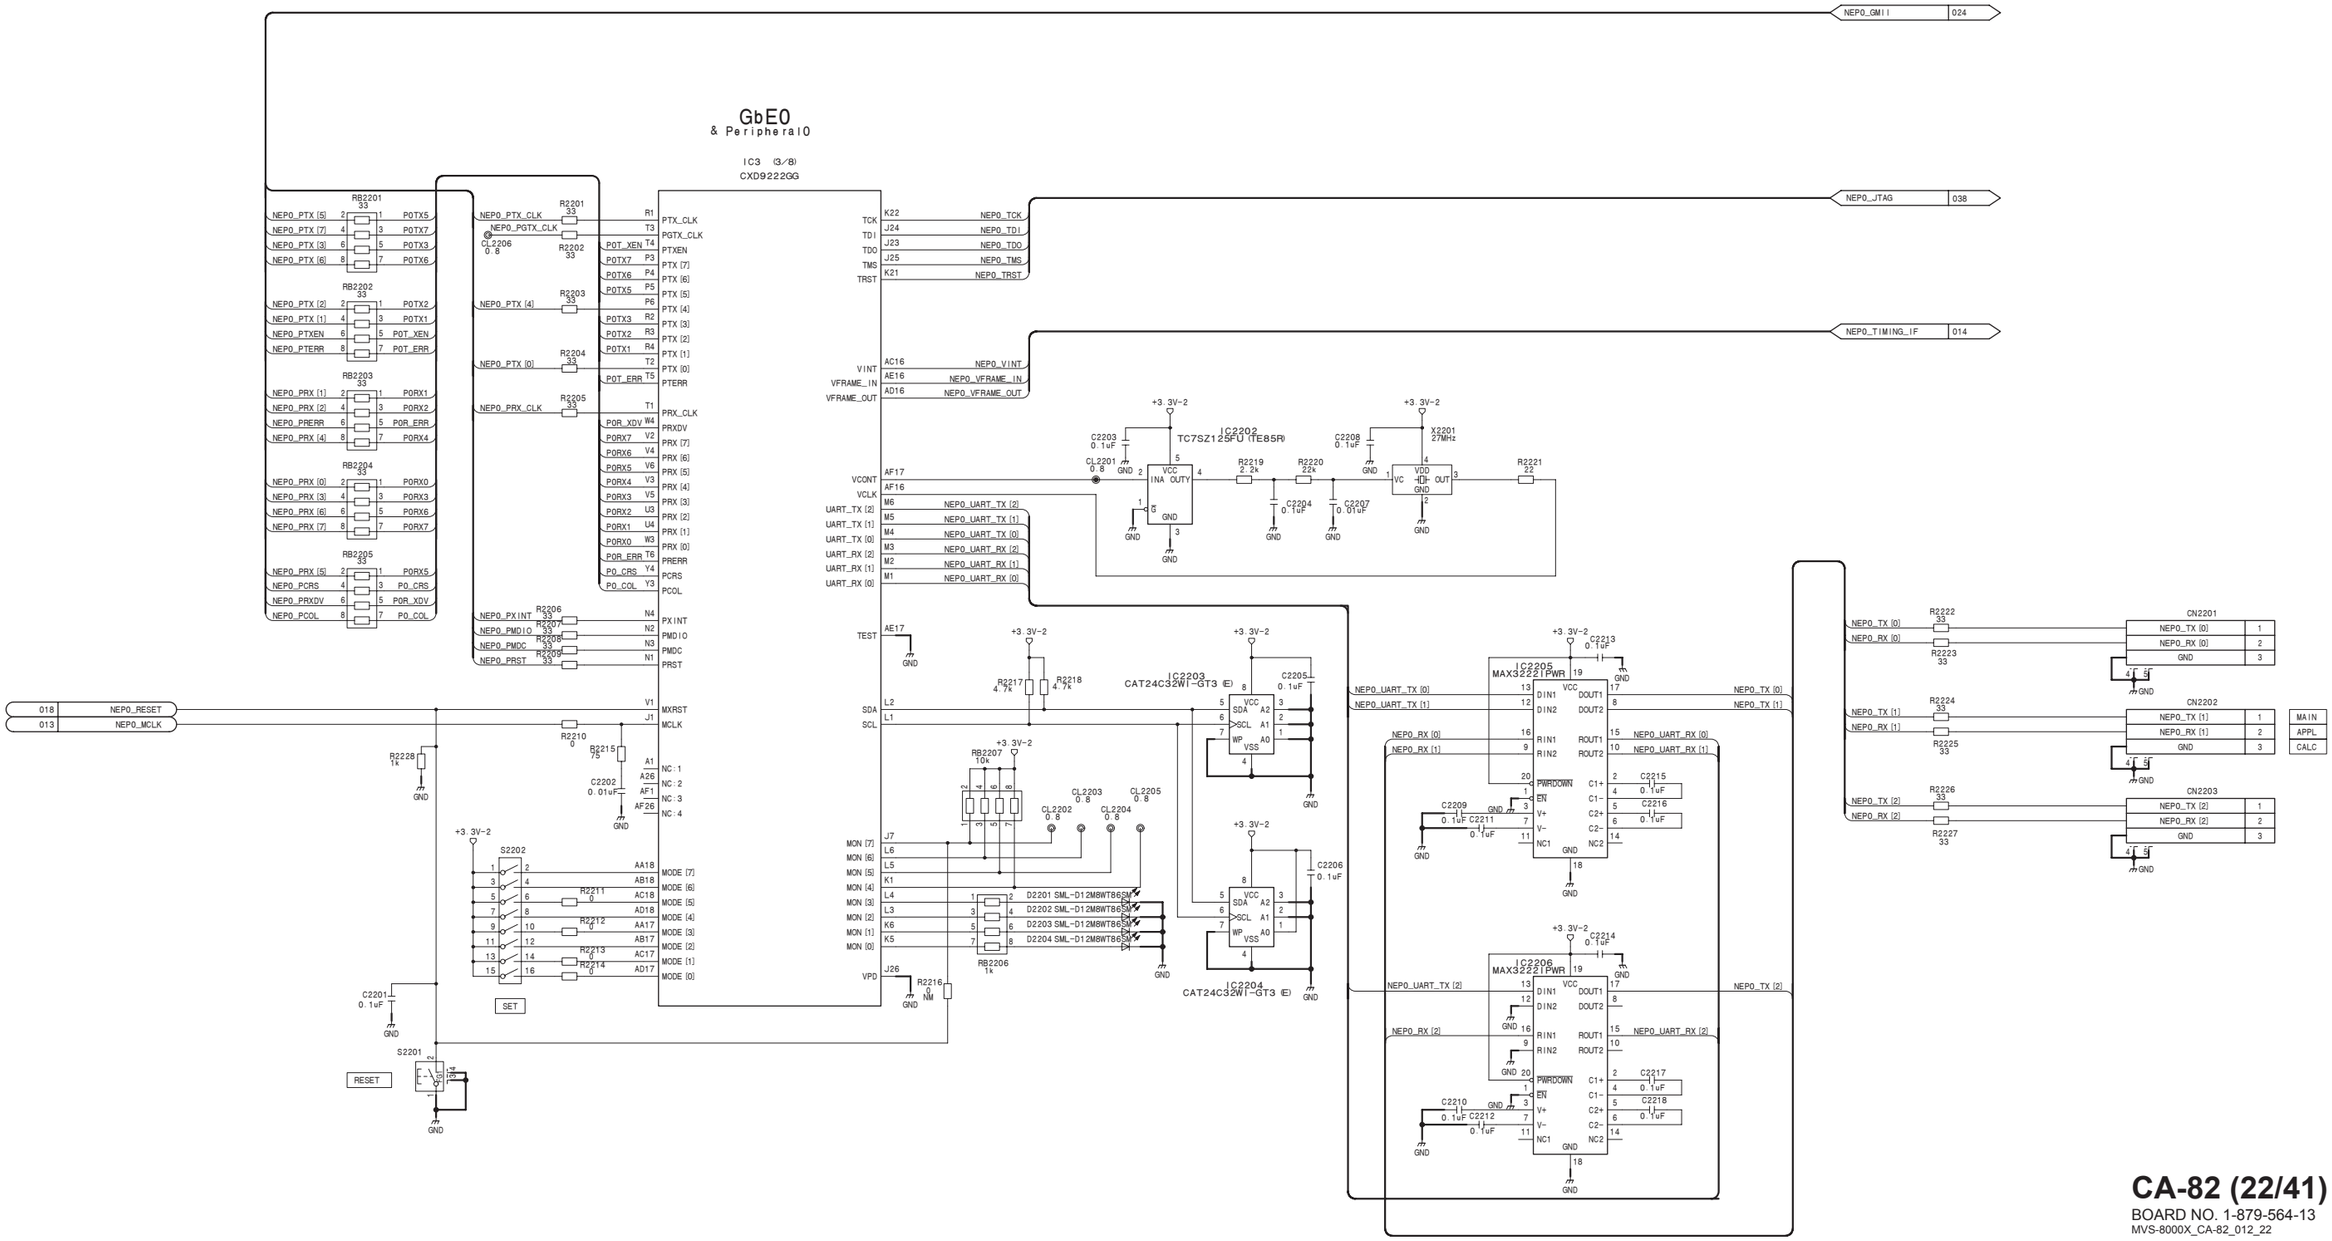

CA-82 (22/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_22

CA-82 (23/41)
SUFFIX: -13

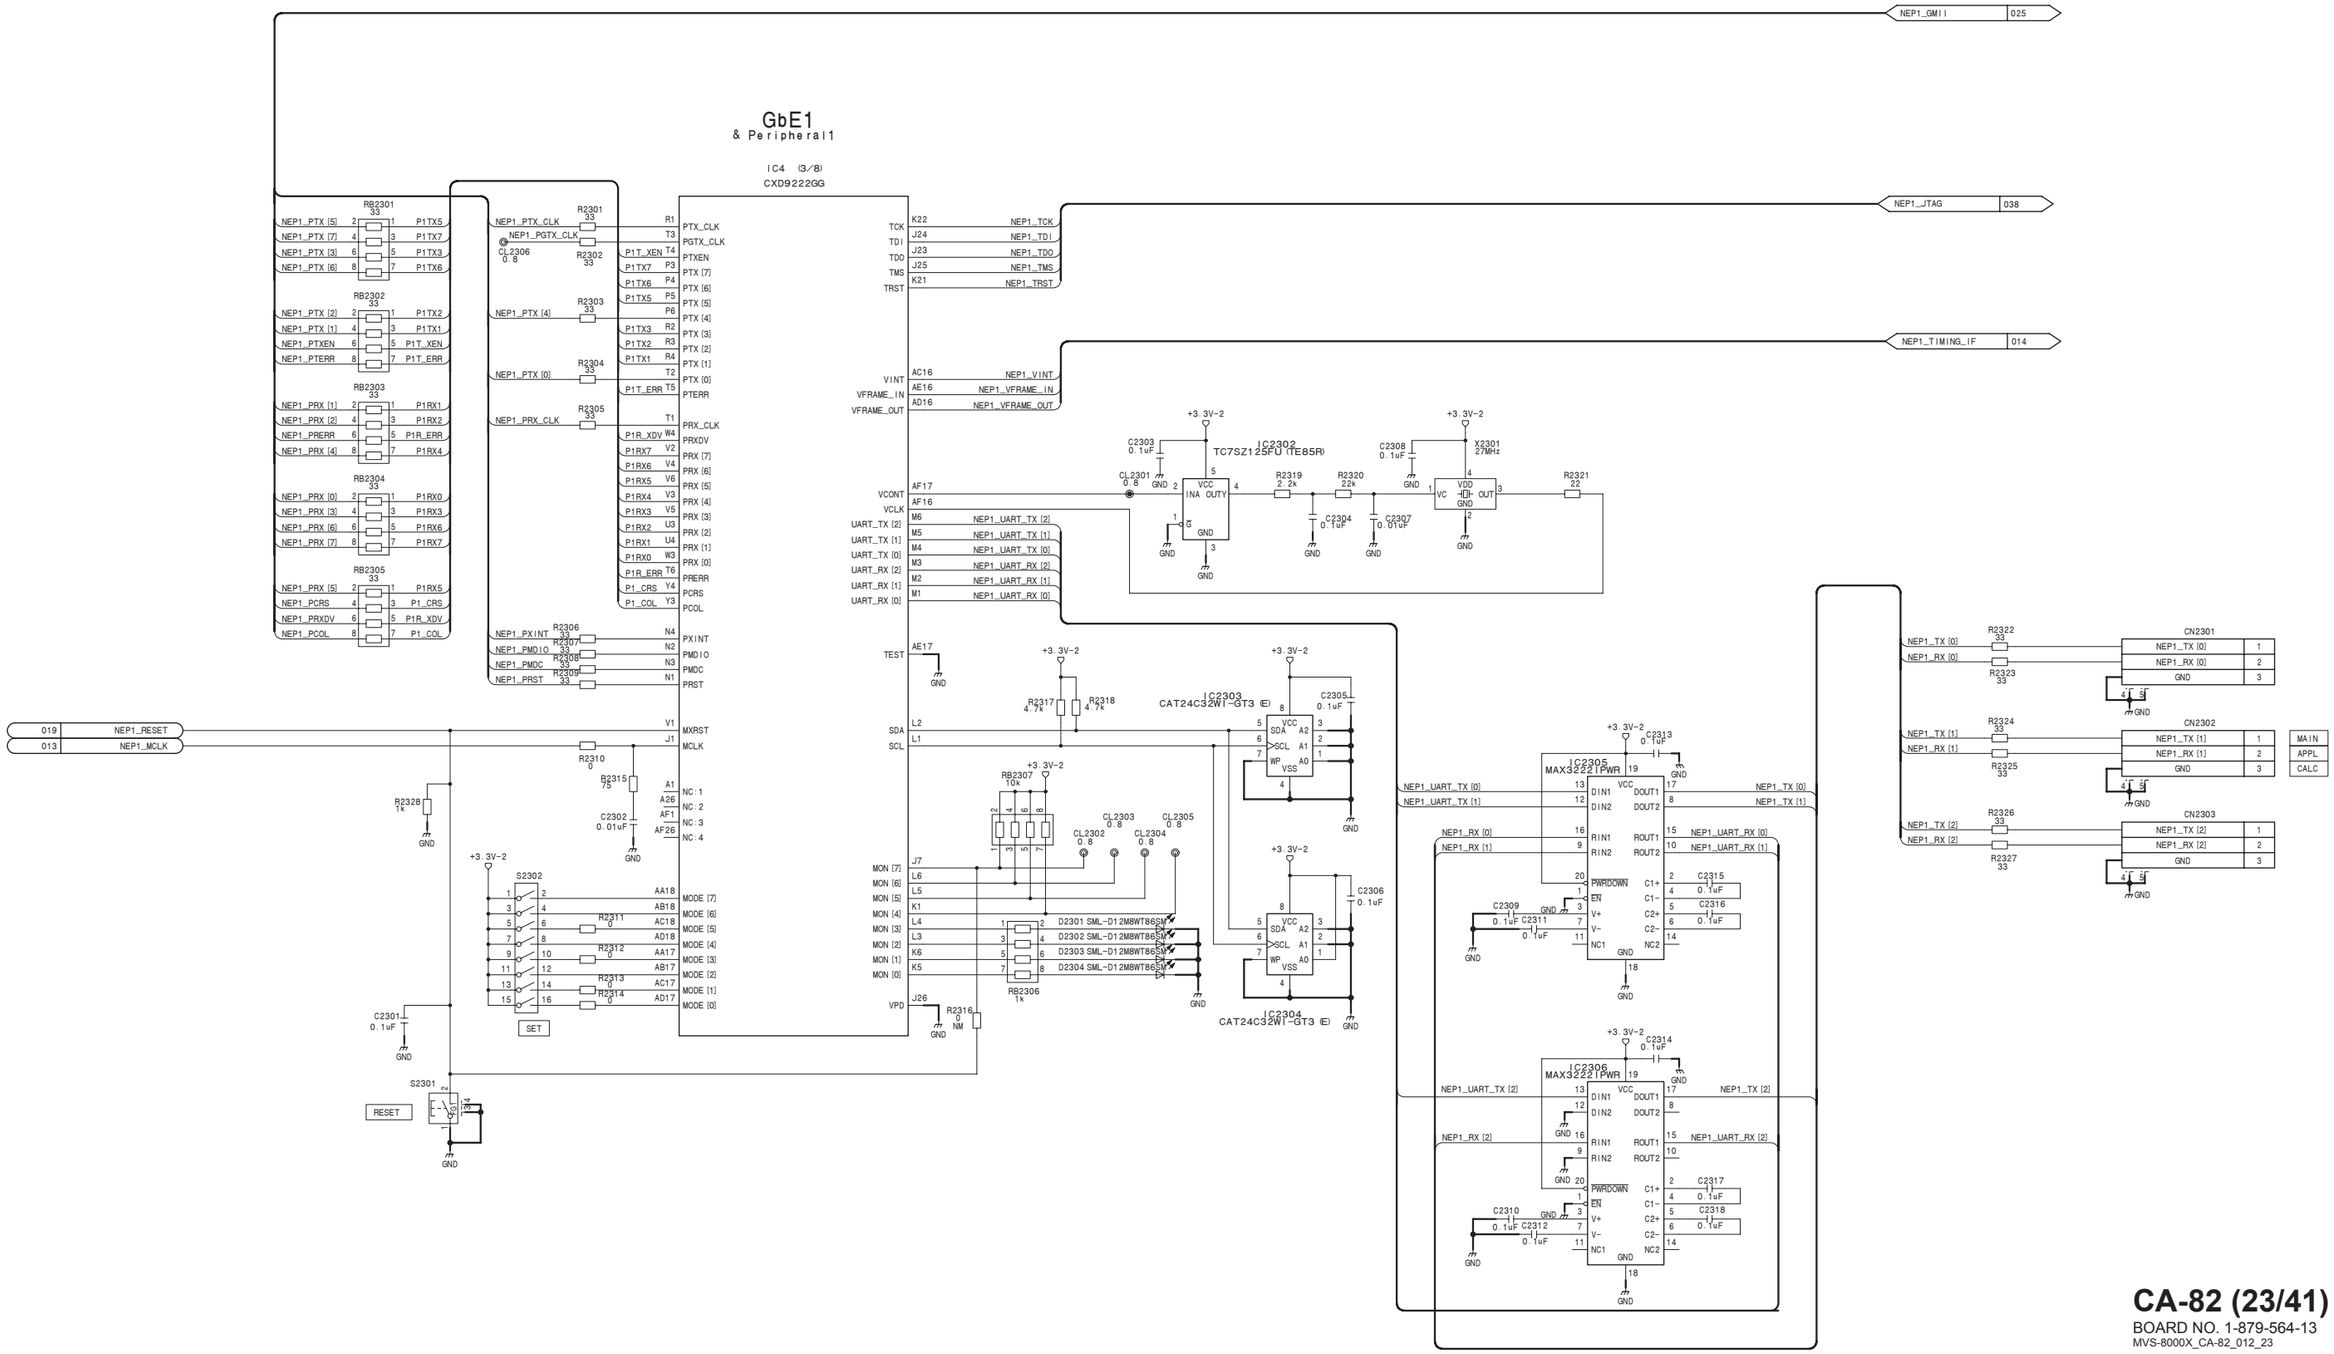

CA-82 (23/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_23

CA-82 (24/41)
SUFFIX: -13

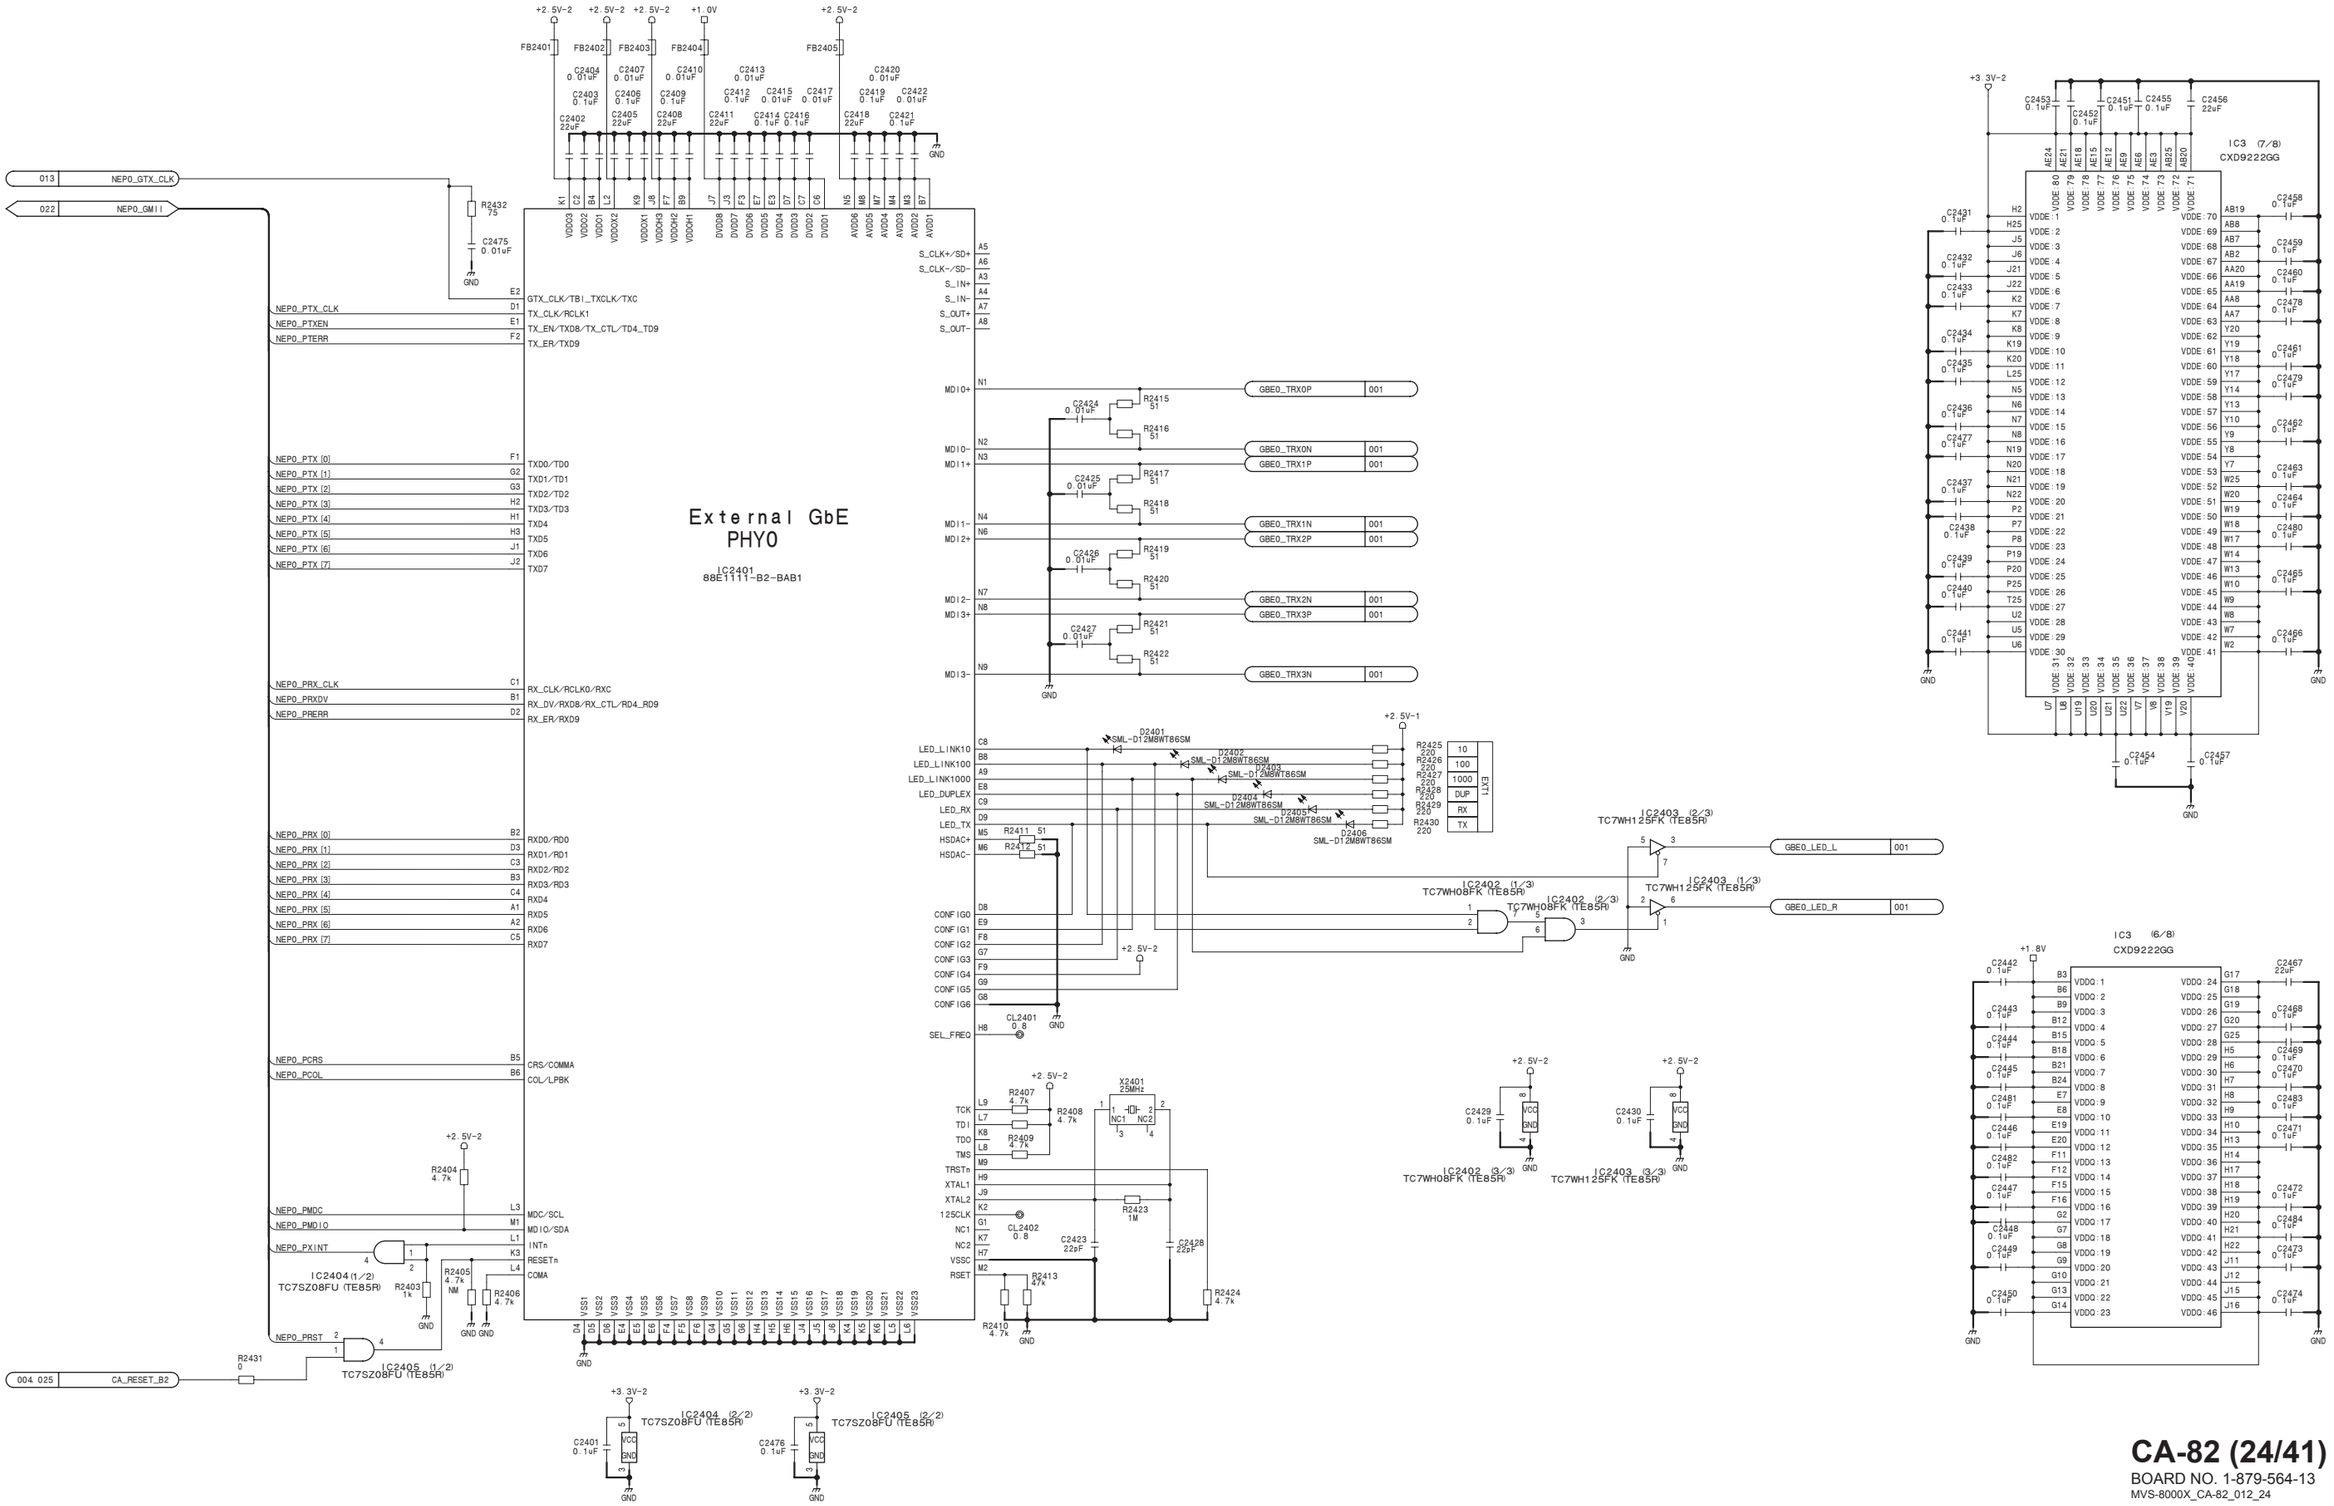

4-26

CA-82 (24/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_24

CA-82 (25/41)
SUFFIX: -13

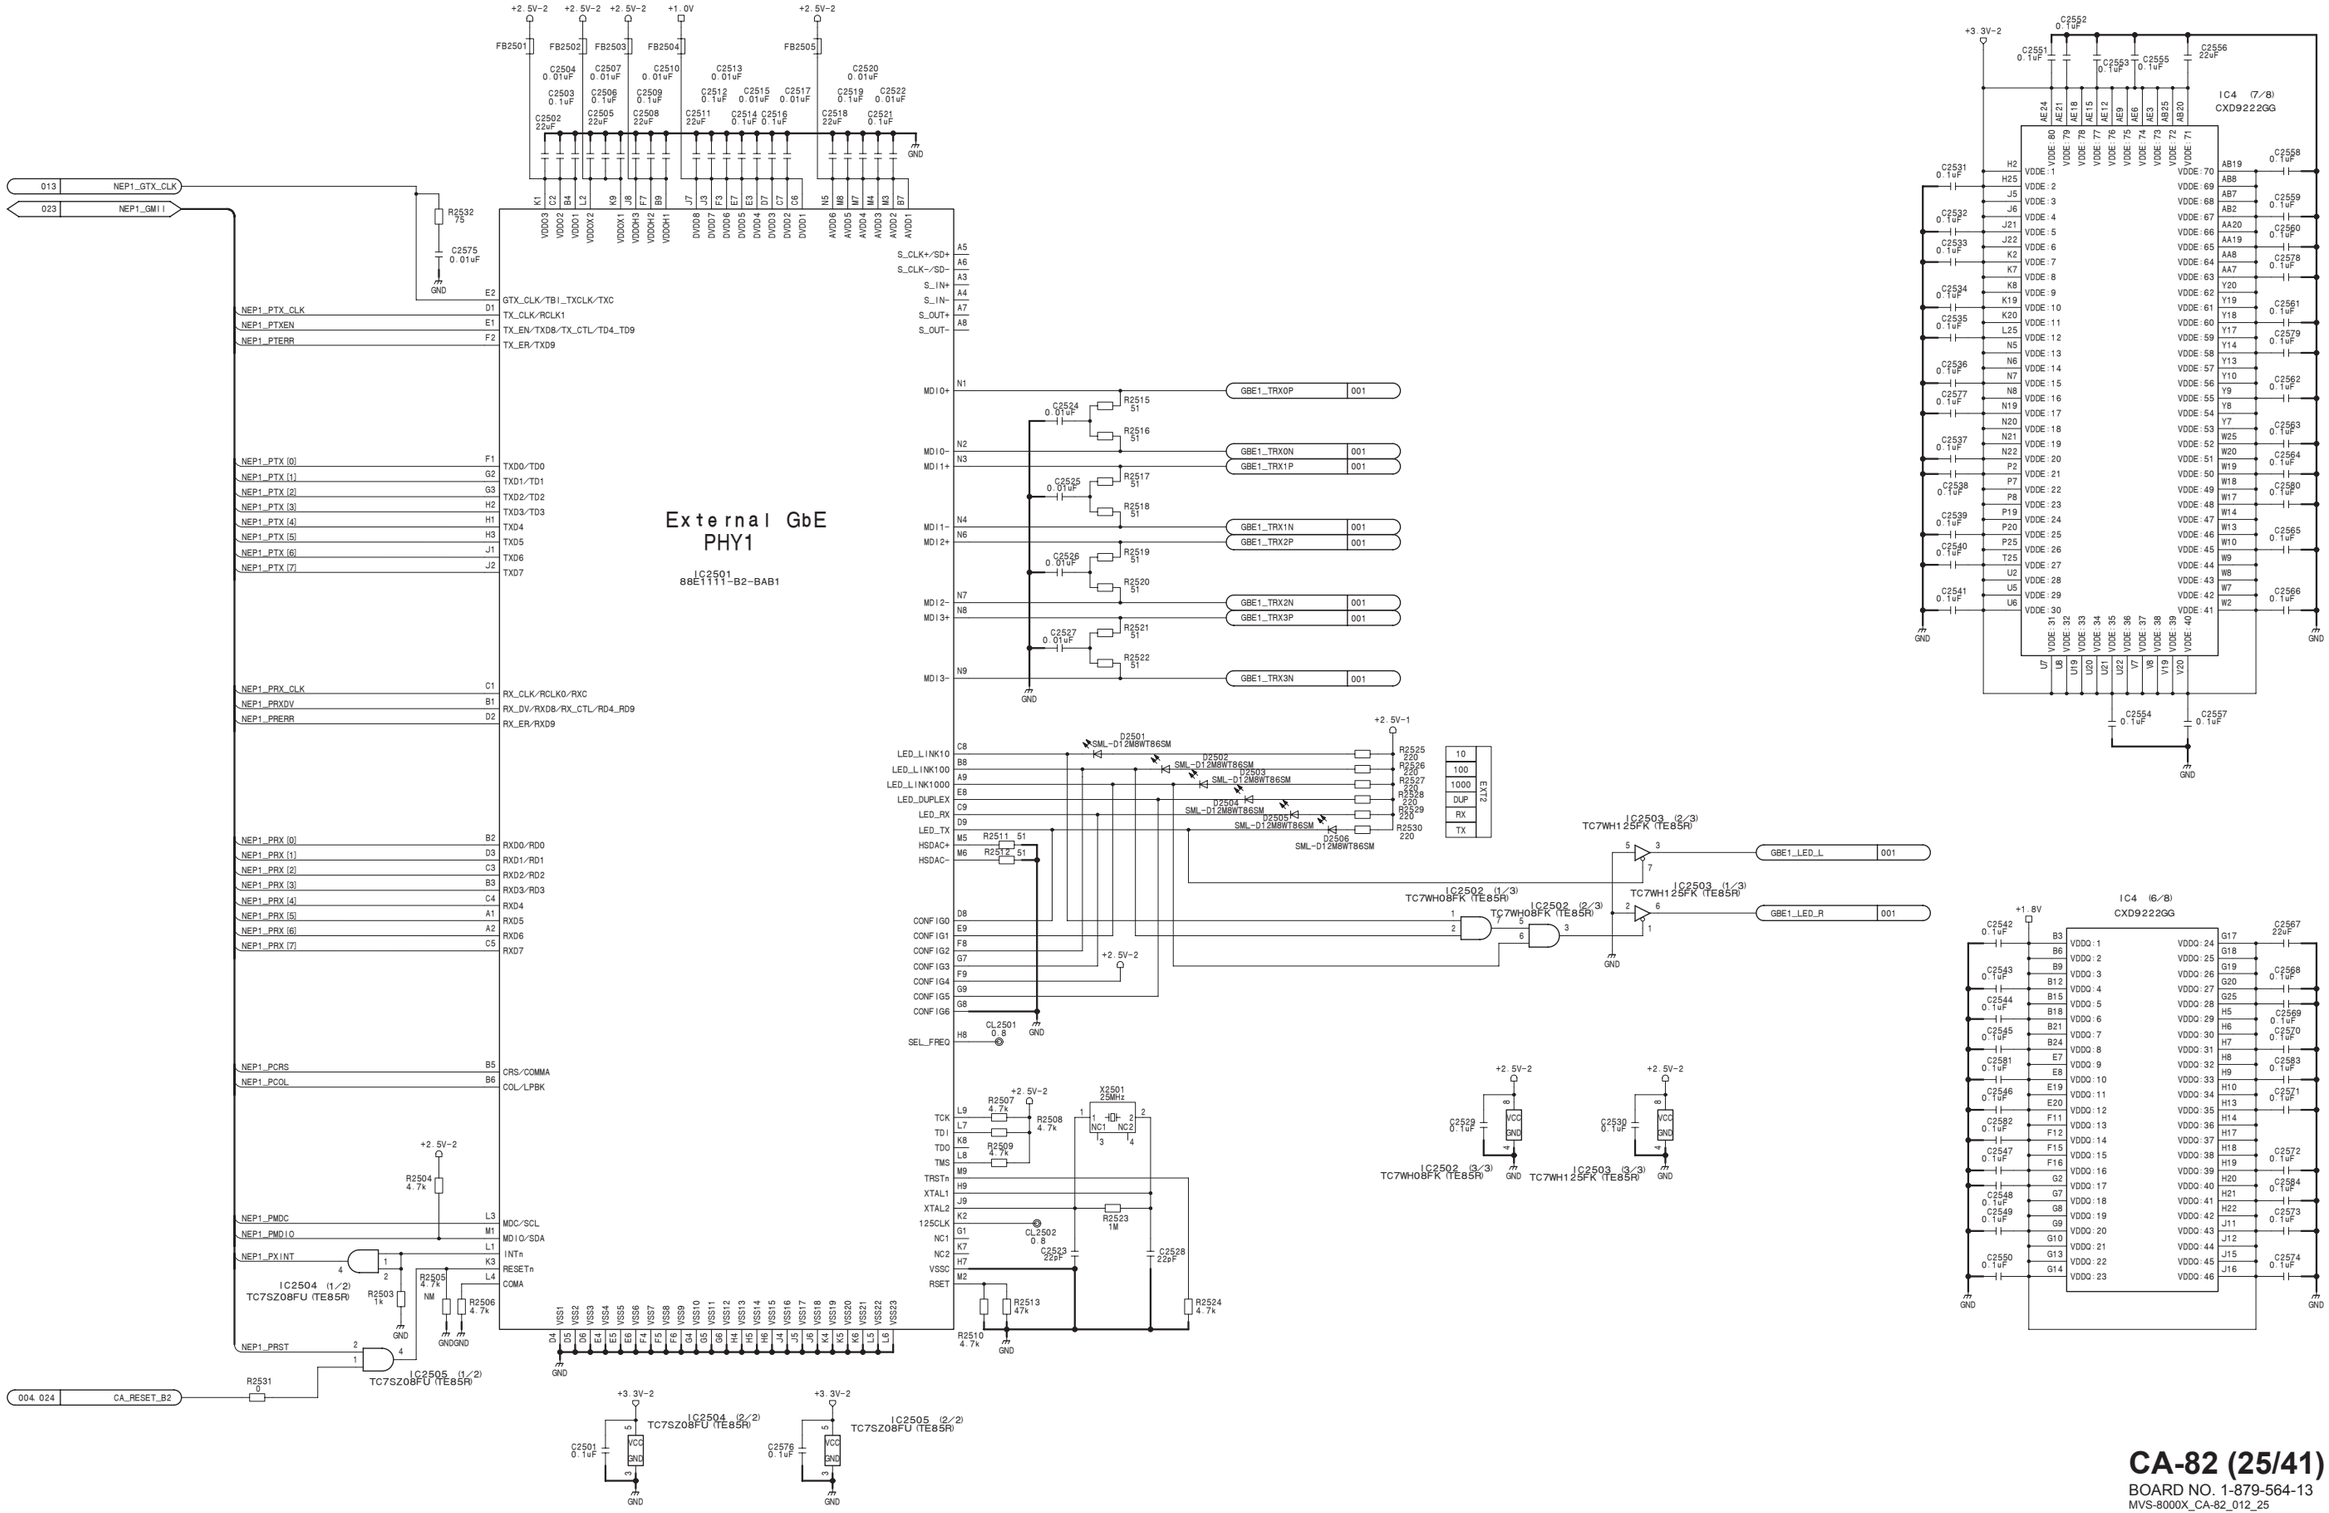

CA-82 (25/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_25

CA-82 (26/41)
SUFFIX: -13

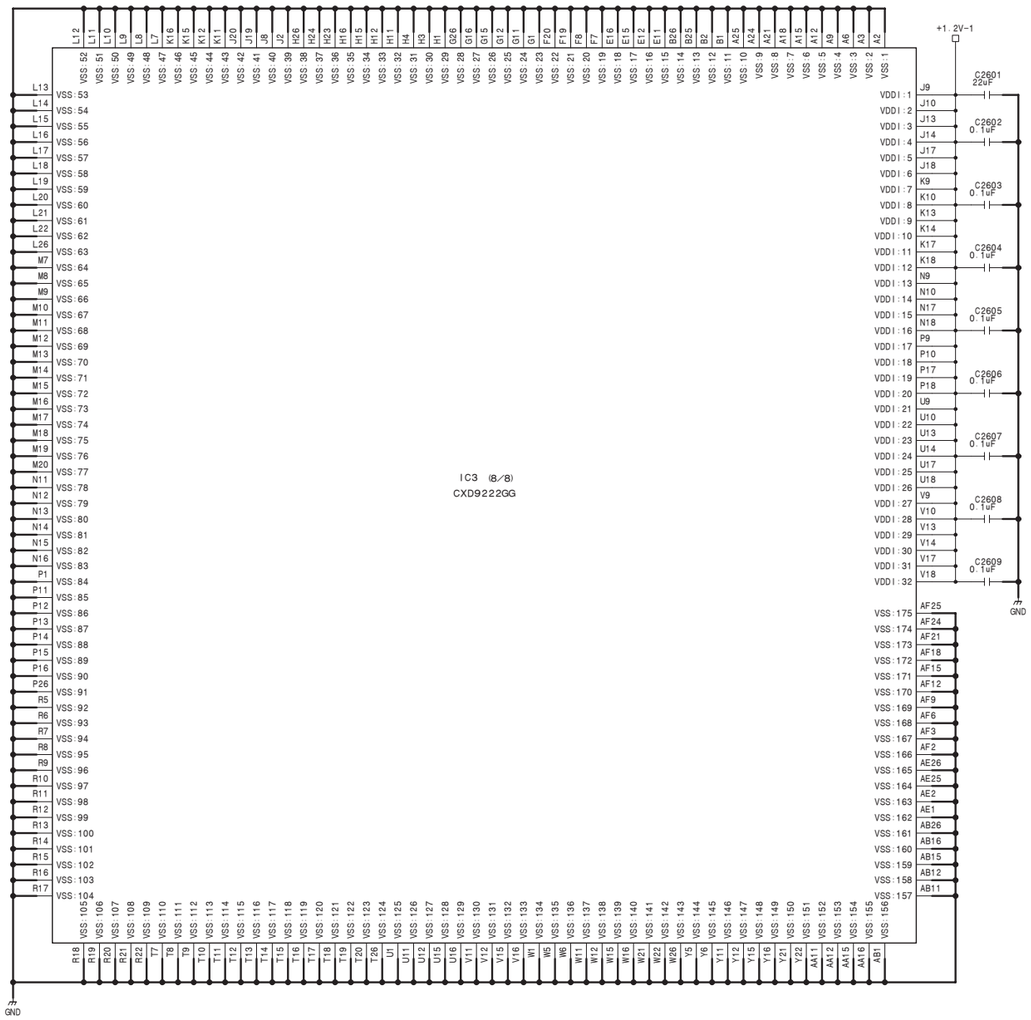

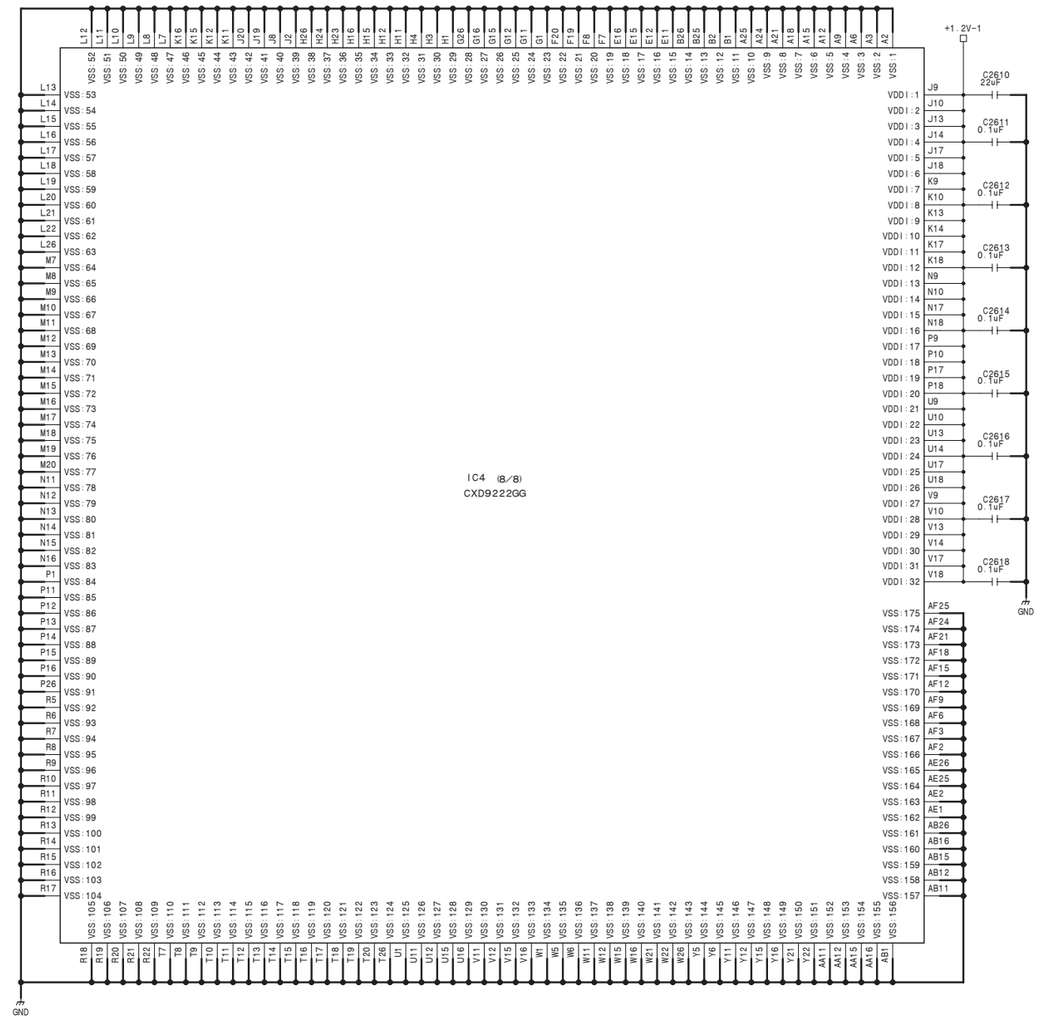

CA-82 (26/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_26

CA-82 (27/41)

SUFFIX: -13

CA-82 (27/41)

SUFFIX: -13

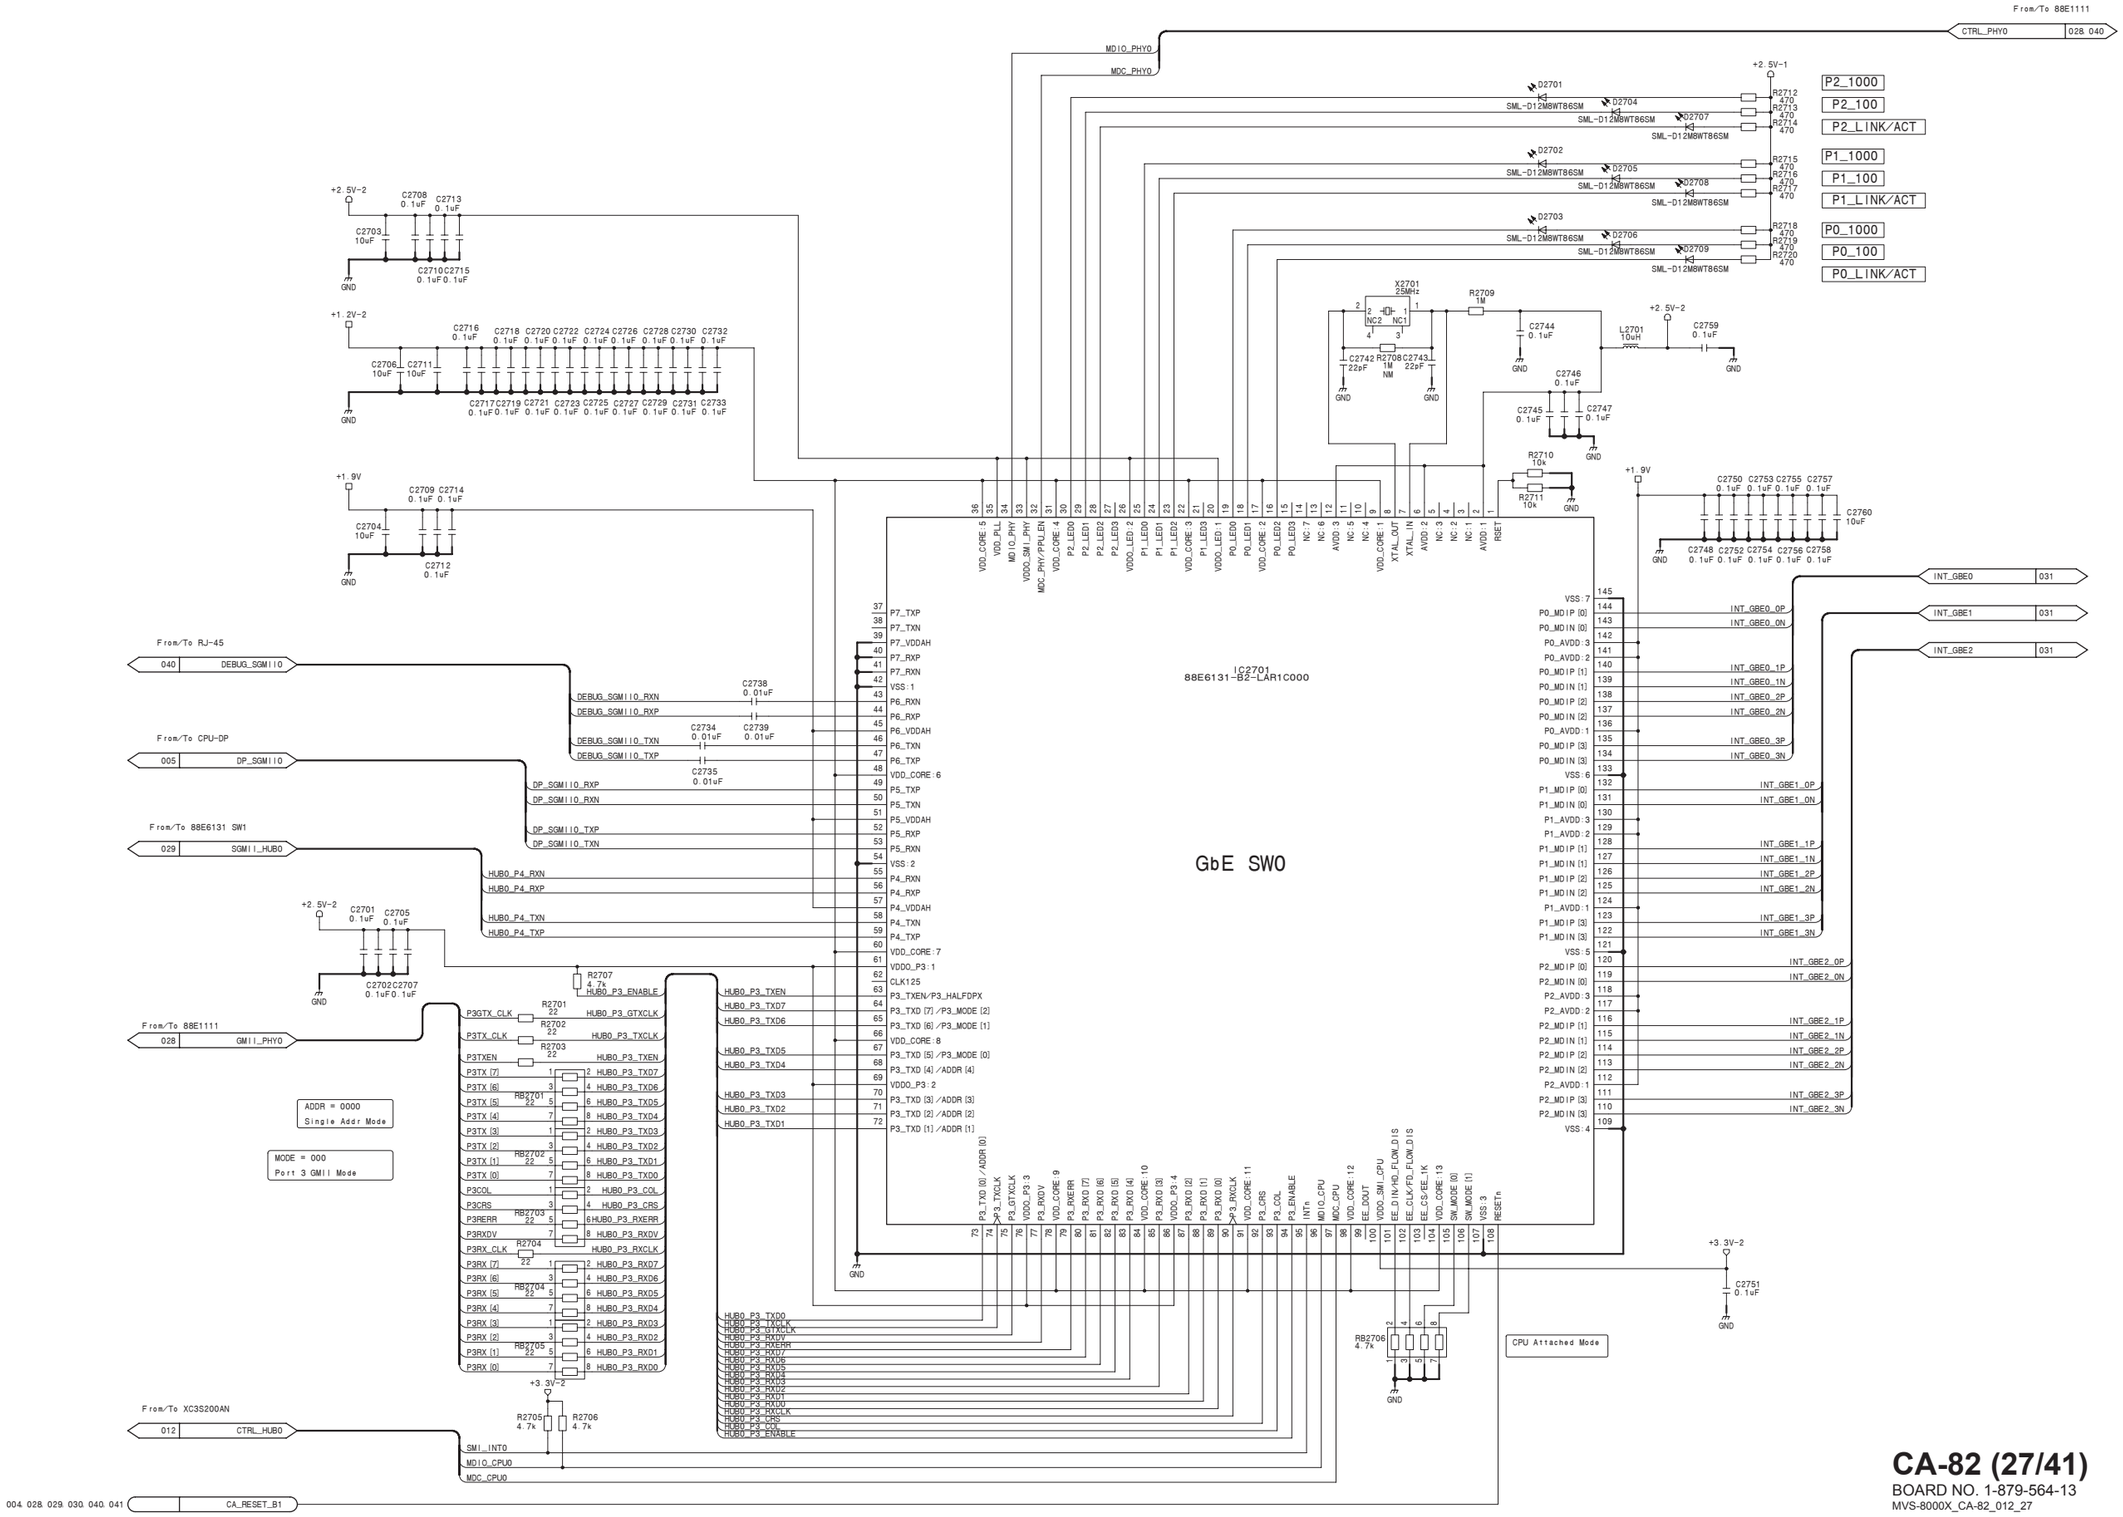

CA-82 (27/41)

BOARD NO. 1-879-564-13

MVS-8000X_CA-82_012_27

CA-82 (28/41)
SUFFIX: -13

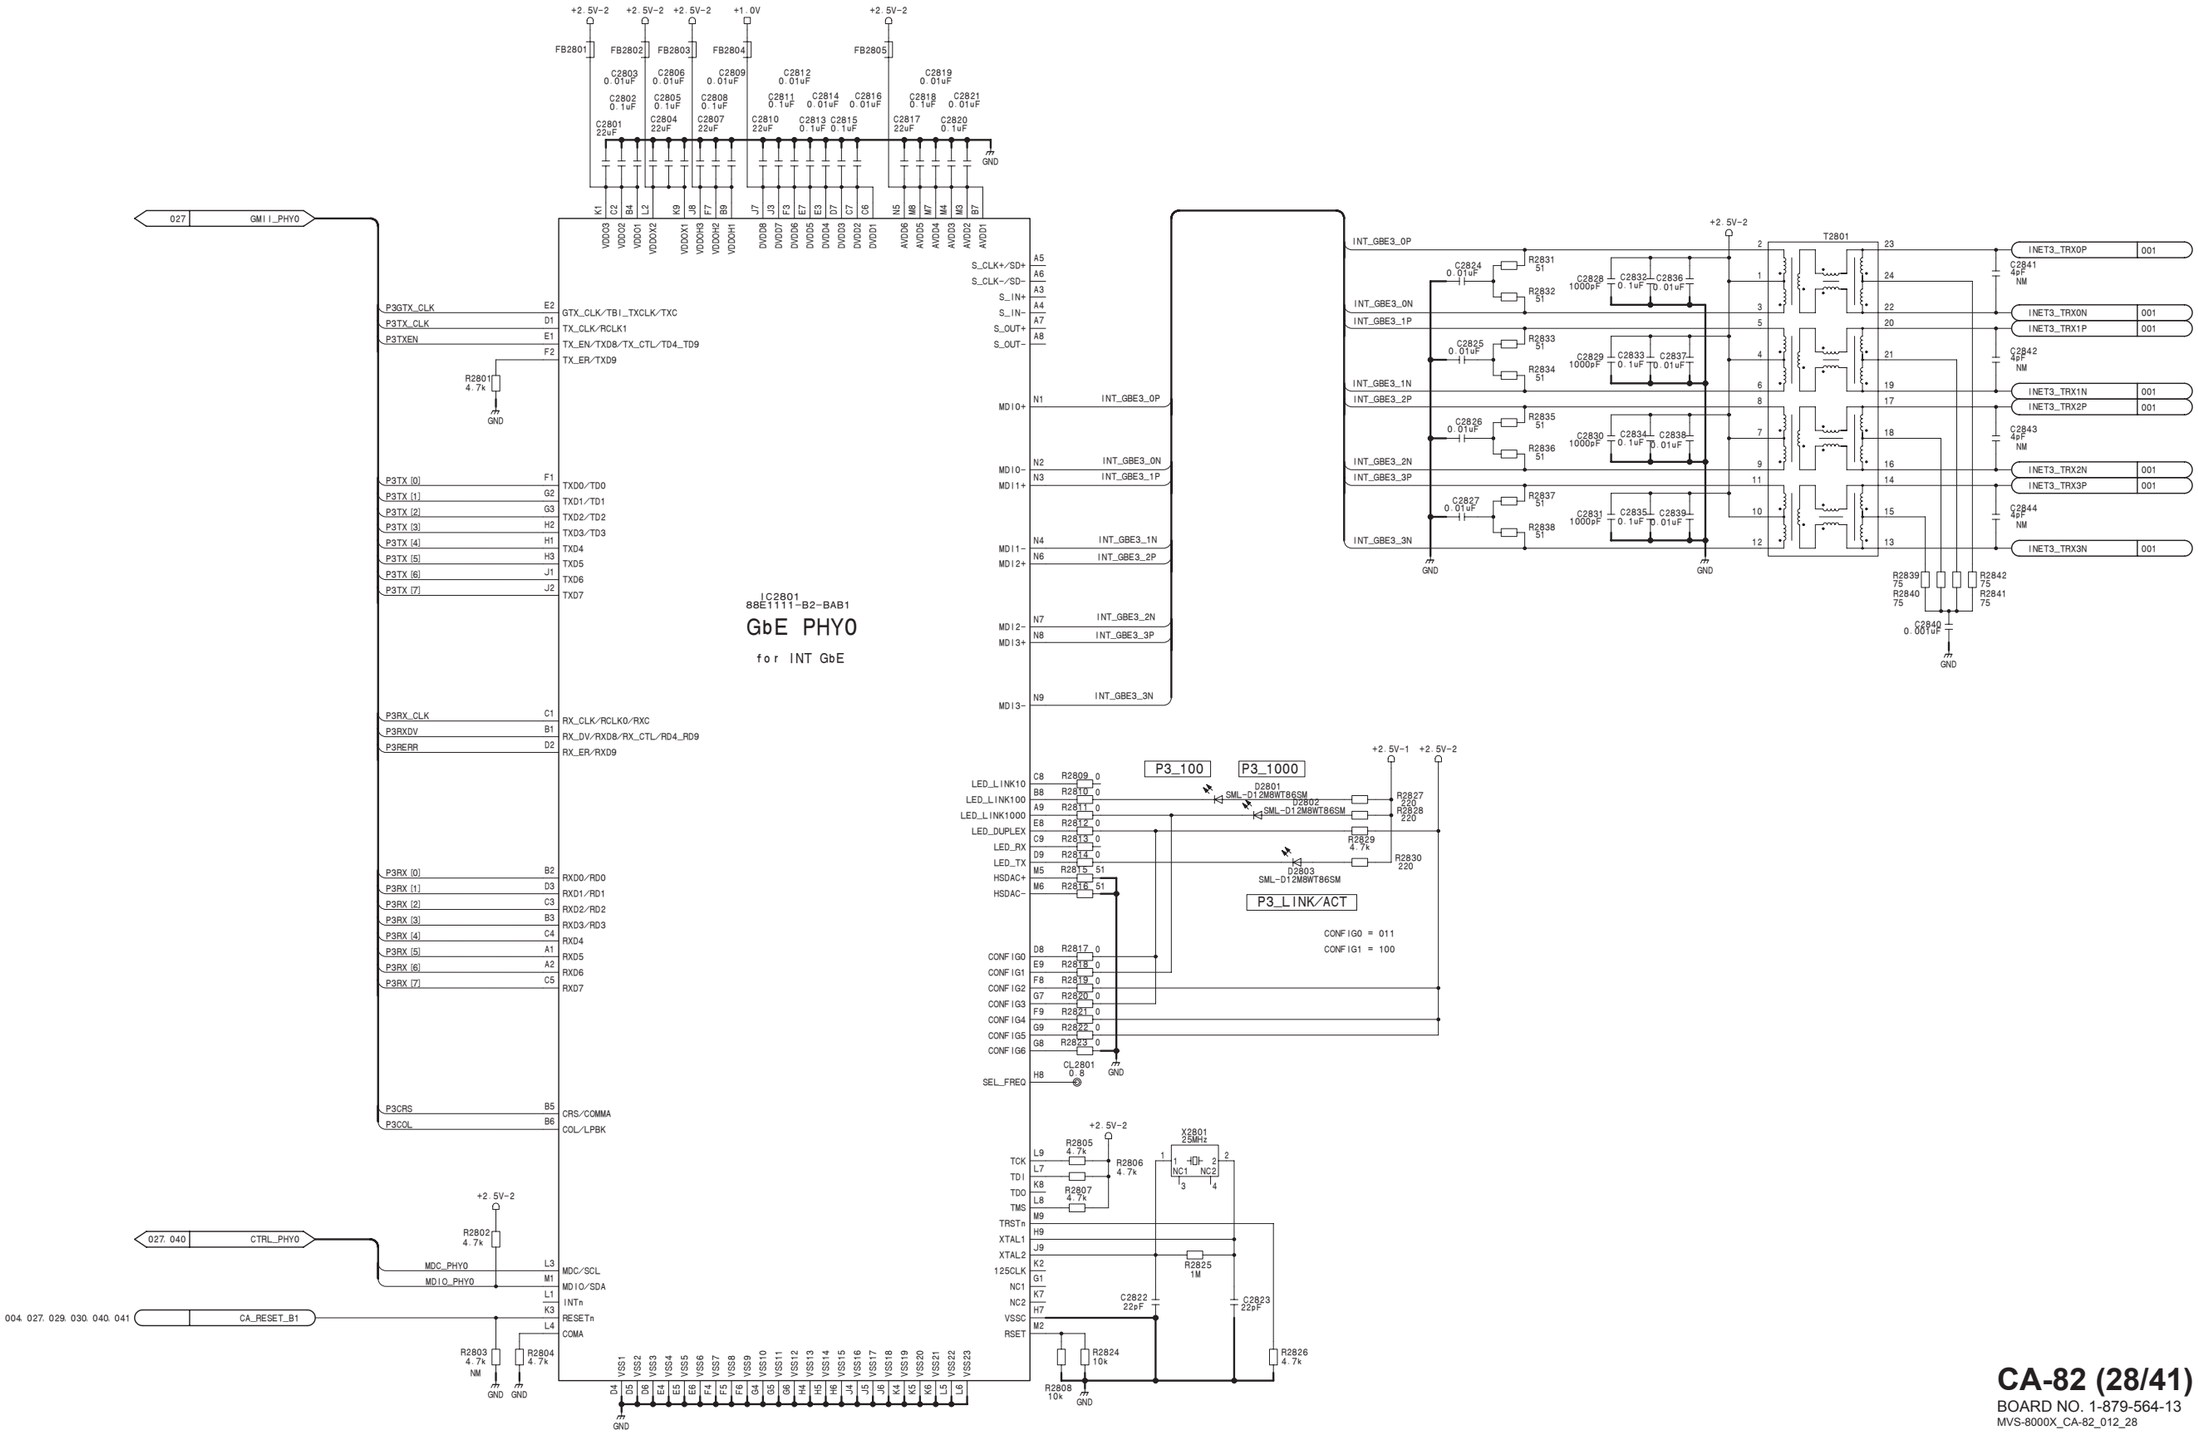

CA-82 (28/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_28

CA-82 (29/41)
SUFFIX: -13

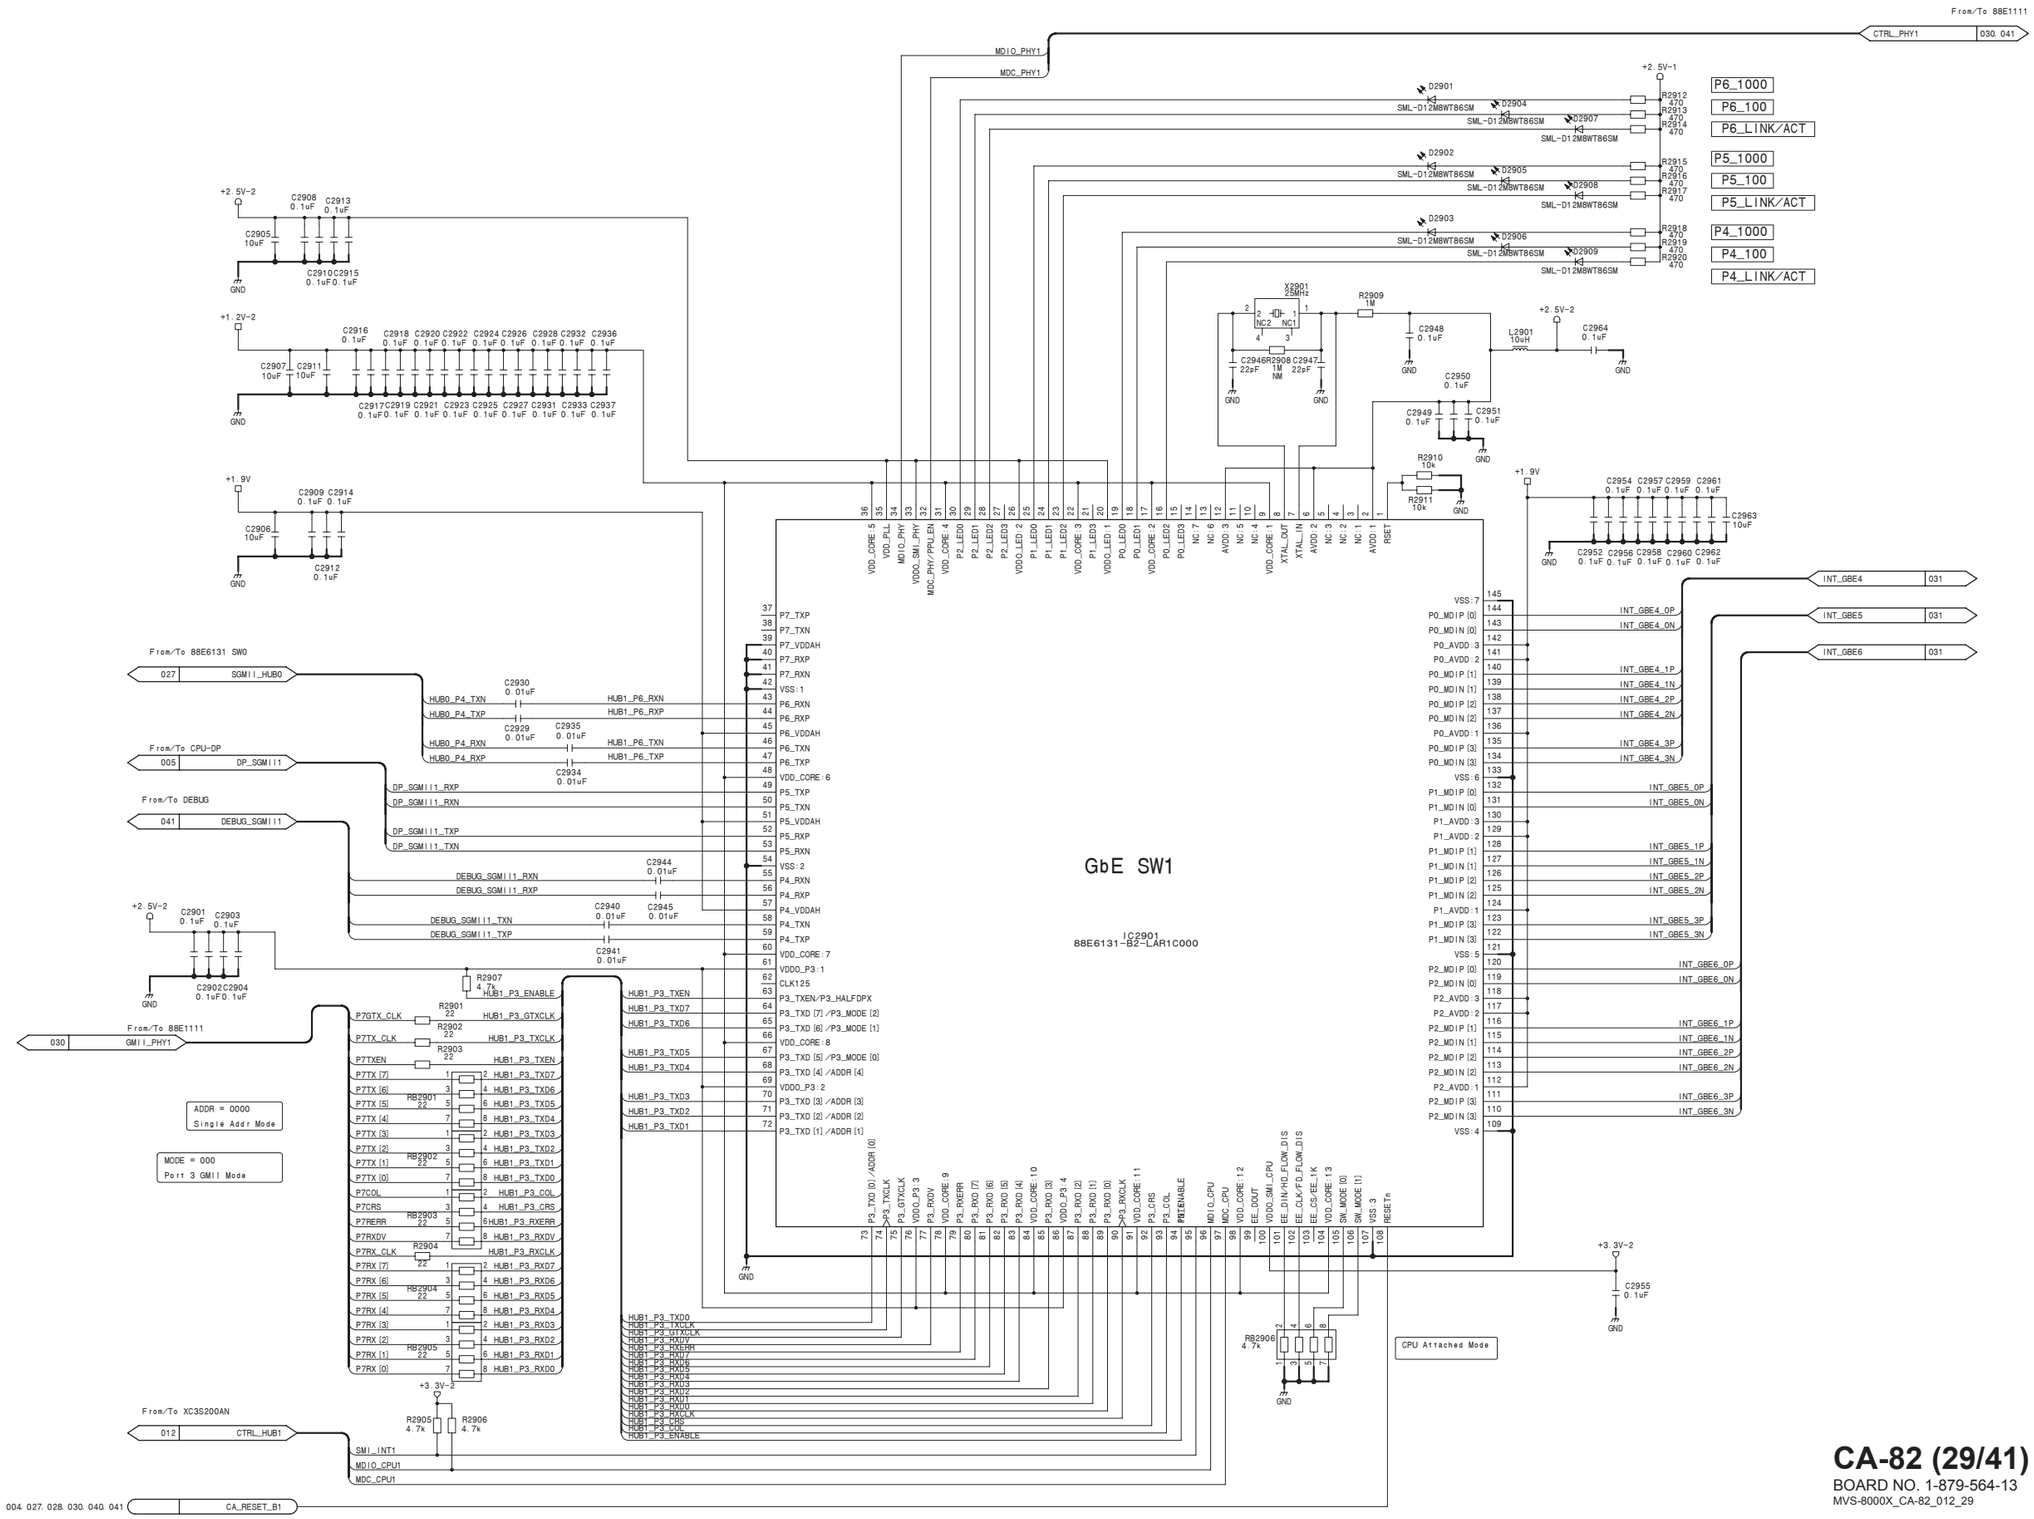

CA-82 (29/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_29

CA-82 (30/41)
SUFFIX: -13

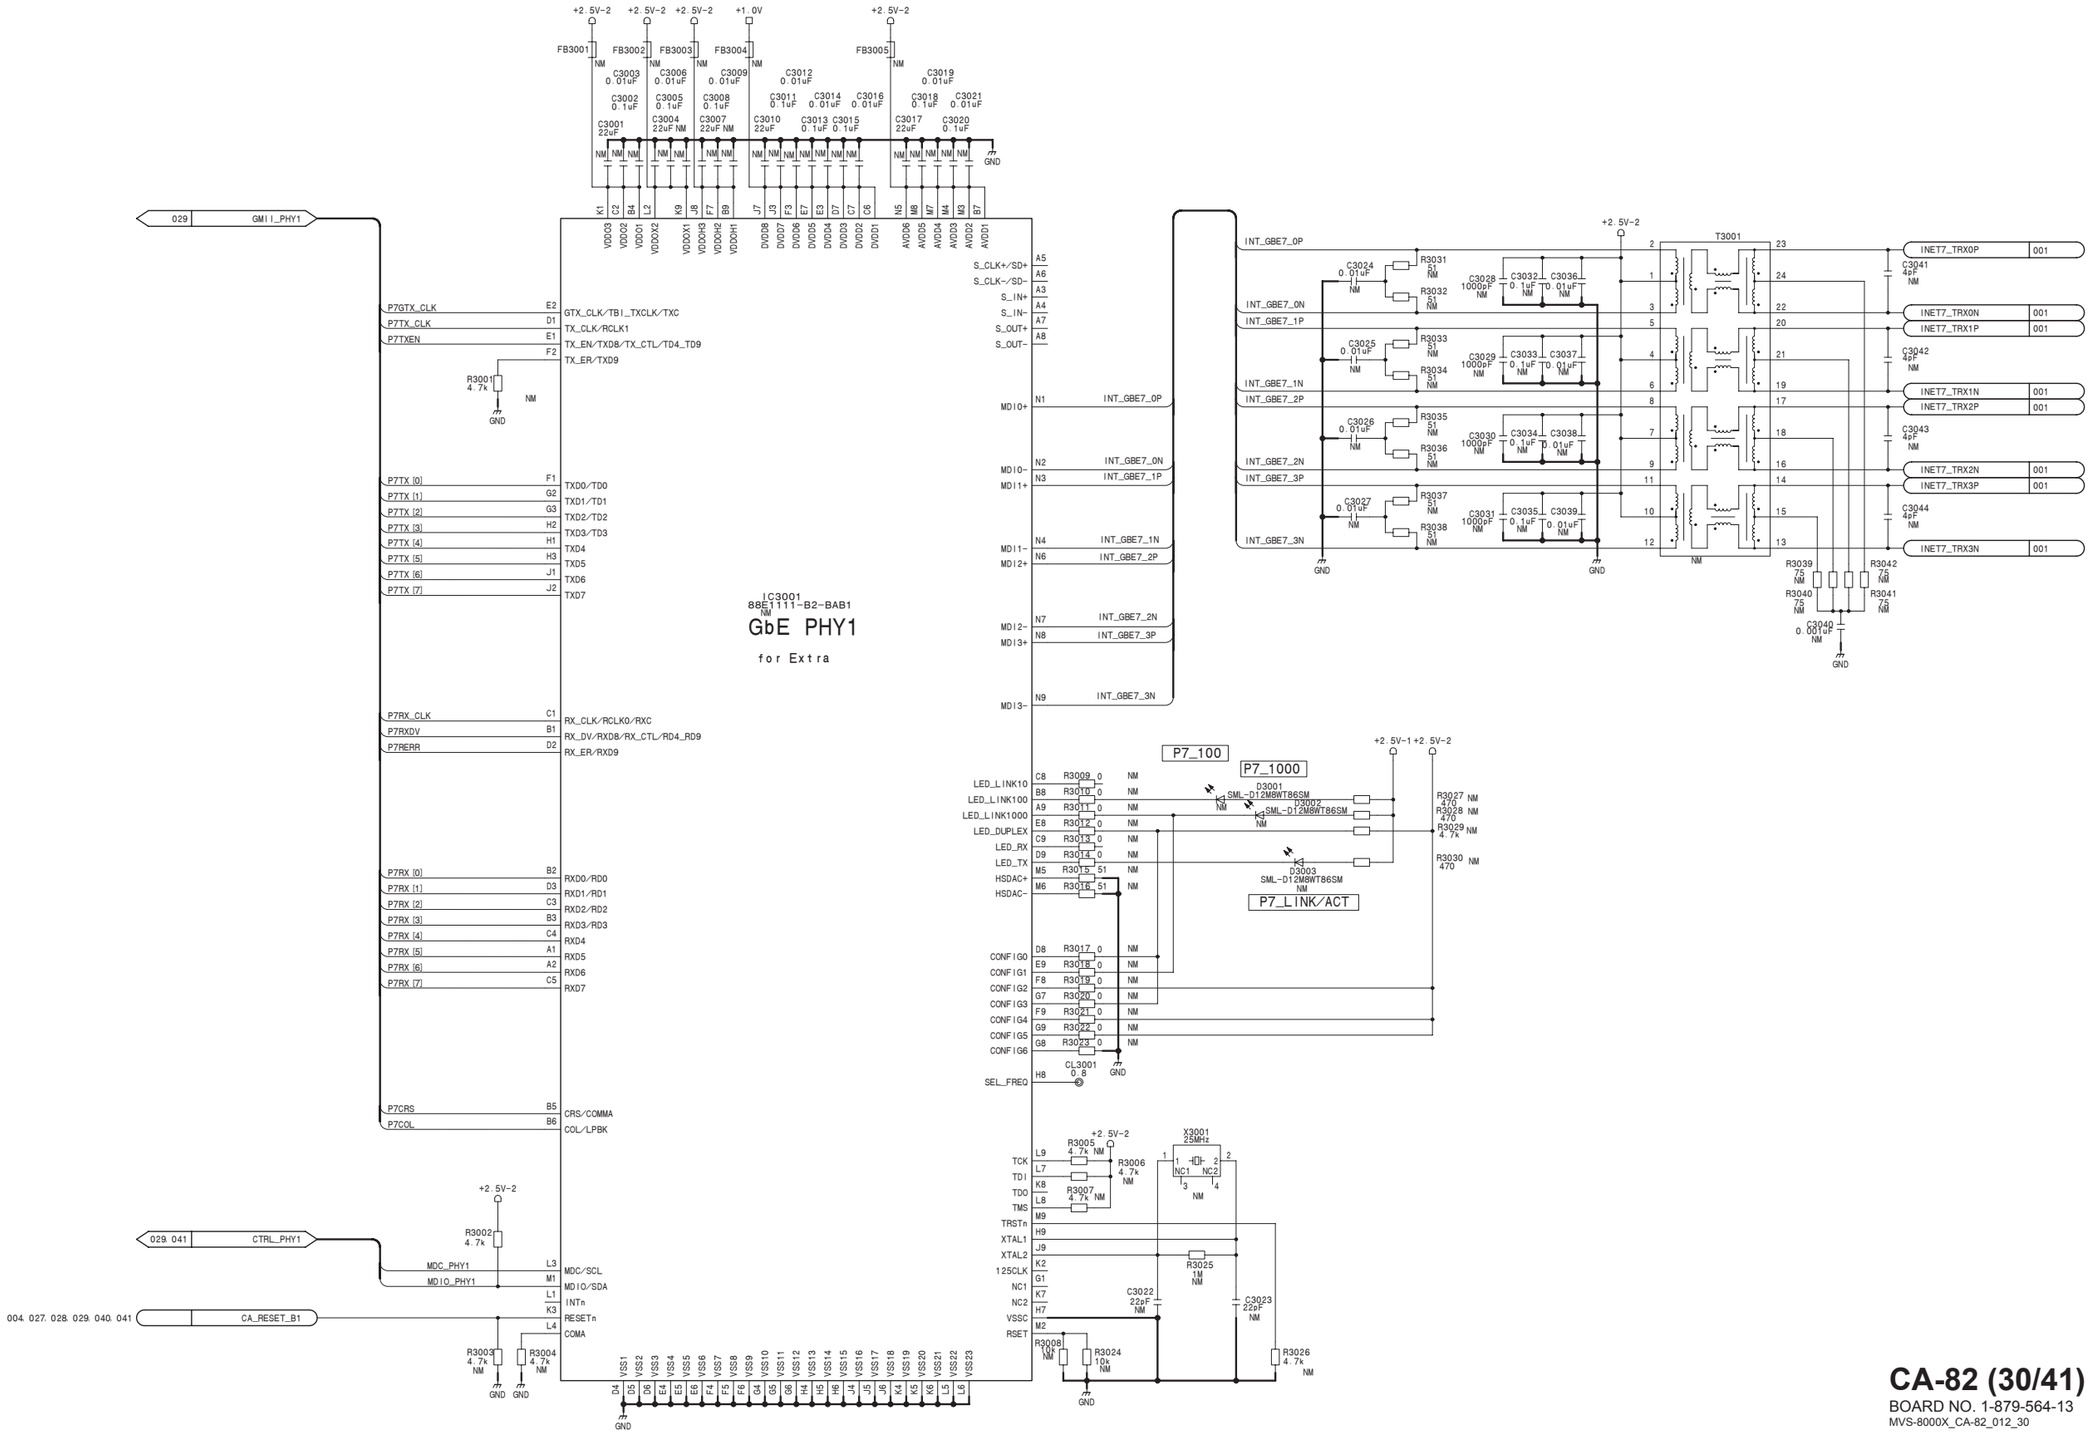

CA-82 (30/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_30

CA-82 (31/41)
SUFFIX: -13

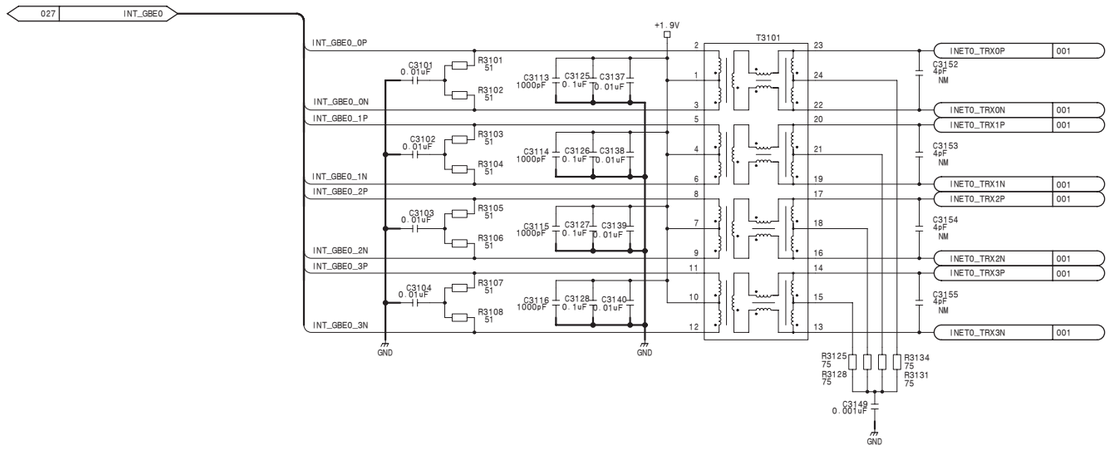

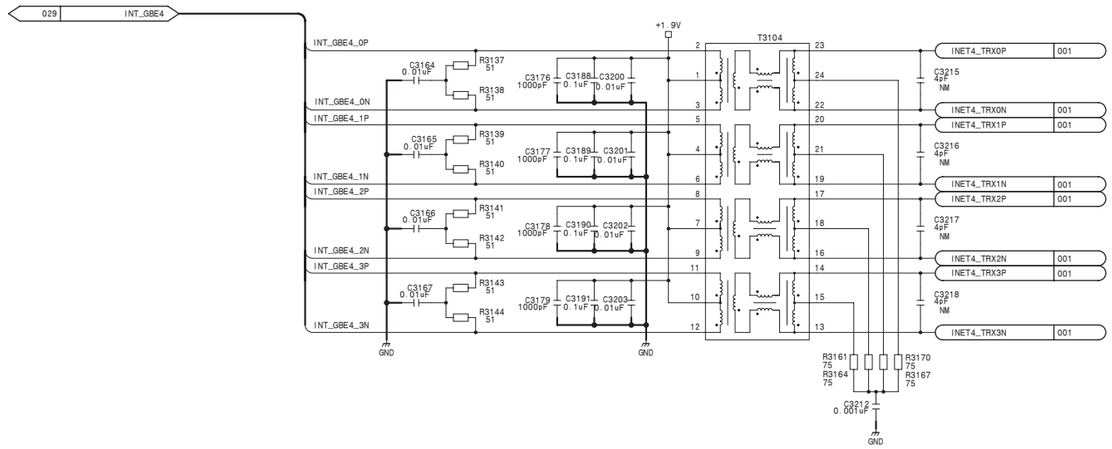

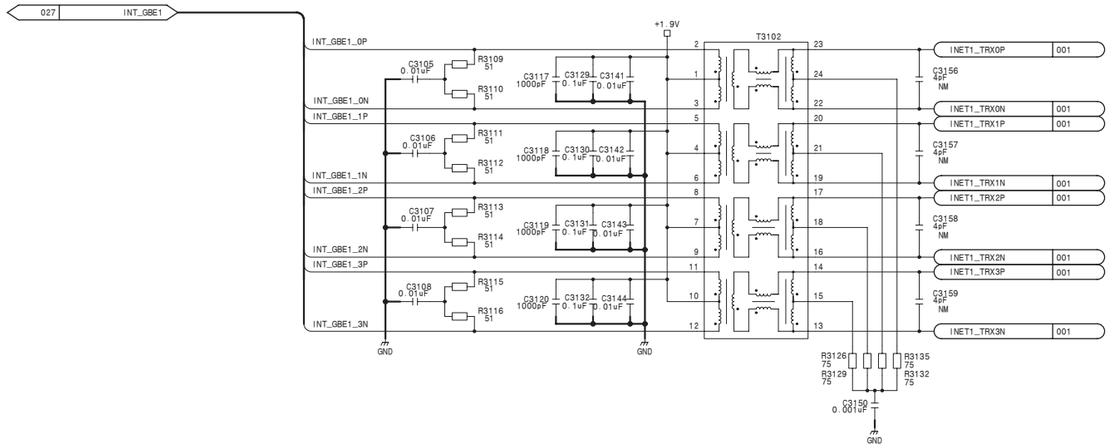

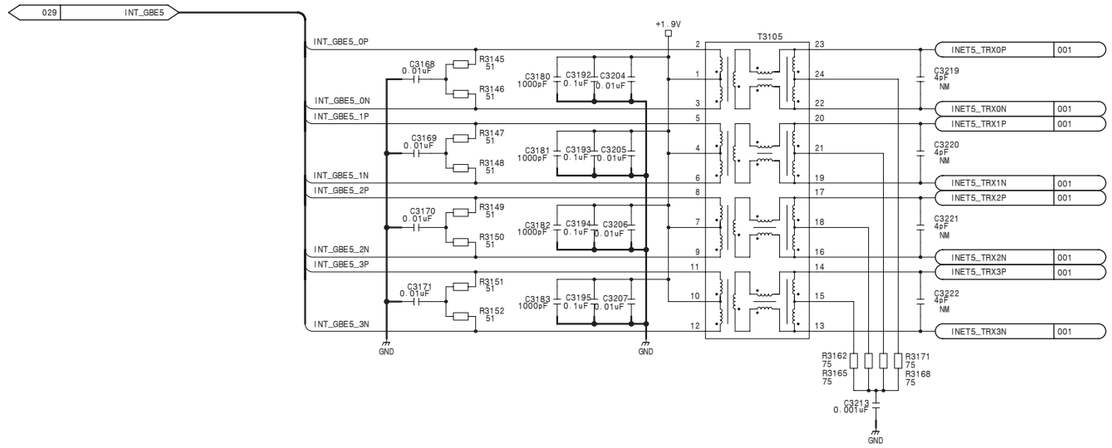

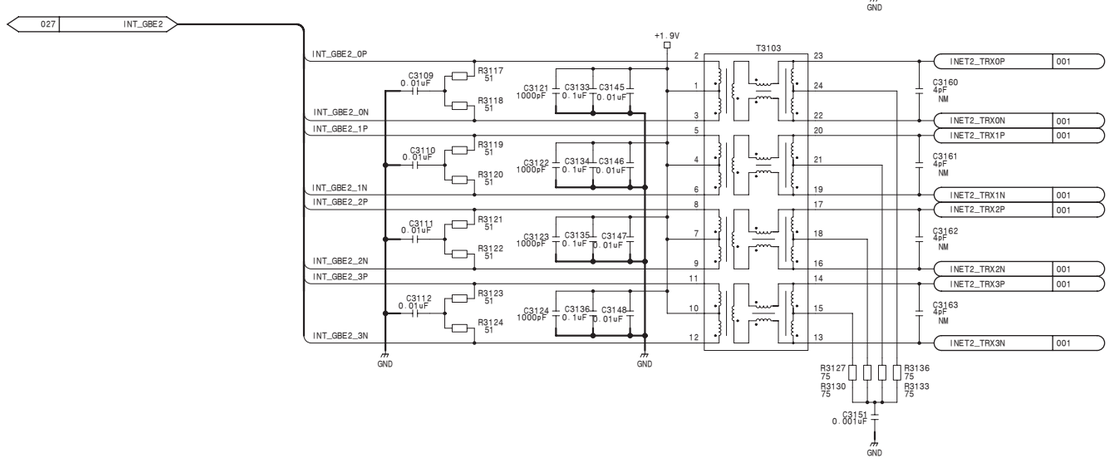

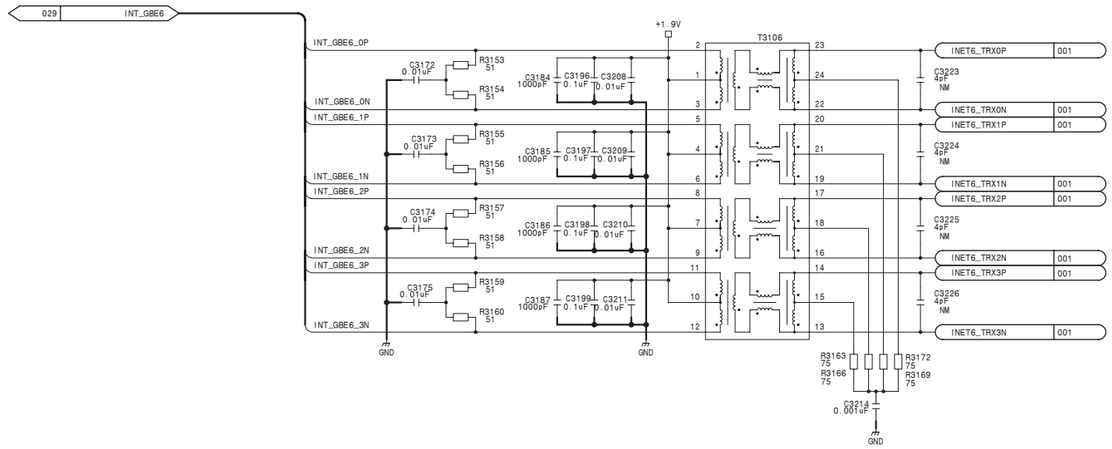

CA-82 (32/41)
SUFFIX: -13

GPI & SIO CTRL

IC5 (6/8)
XC3S200AN-4FTG256C4136

GPI_IN [0] N13
GPI_IN [1] M13
GPI_IN [2] L13
GPI_IN [3] K13
GPI_IN [4] J13
GPI_IN [5] K12
GPI_IN [6] J12
GPI_IN [7] G12
GPI_IN [8] F12
GPI_IN [9] K11
GPI_IN [10] J10
GPI_IN [11] H10
GPI_IN [12] J11
GPI_IN [13] H11
GPI_IN [14] G11
GPI_IN [15] F11
GPI_IN1 N14
GPI_IN2 M14
GPI_IN3 L14
GPI_IN4 K14
GPI_IN5 J14
GPI_IN6 H13
GPI_IN7 H14
GPI_IN8 M15
GPI_IN9 K15
GPI_IN10 H15
GPI_IN11 N16
GPI_IN12 M16
GPI_IN13 L16
GPI_IN14 K16
GPI_IN15 J16
GPI_IN16 H16
GPI_OUT1 N14
GPI_OUT2 M14
GPI_OUT3 L14
GPI_OUT4 K14
GPI_OUT5 J14
GPI_OUT6 H13
GPI_OUT7 H14
GPI_OUT8 M15
GPI_OUT9 K15
GPI_OUT10 H15
GPI_OUT11 N16
GPI_OUT12 M16
GPI_OUT13 L16
GPI_OUT14 K16
GPI_OUT15 J16
GPI_OUT16 H16
GPI_OUT [0]
GPI_OUT [1]
GPI_OUT [2]
GPI_OUT [3]
GPI_OUT [4]
GPI_OUT [5]
GPI_OUT [6]
GPI_OUT [7]
GPI_OUT [8]
GPI_OUT [9]
GPI_OUT [10]
GPI_OUT [11]
GPI_OUT [12]
GPI_OUT [13]
GPI_OUT [14]
GPI_OUT [15]

+3.3V-2
RB3230 10k
SIO_STS [0] C16
SIO_STS [1] D15
SIO_STS [2] C15
SIO_STS [3] D14
SIO_STS0 C12
SIO_STS1 D11
SIO_STS2 C11
SIO_STS3 D10
SIO_CTRL0 B15
SIO_CTRL1 B14
SIO_CTRL2 D13
SIO_CTRL3 C13
SIO_INT0
SIO_INT1
SIO_INT2
SIO_INT3
+3.3V-2
RB3231 10k
RB3232 10k
DRIVE422_0 D16
DRIVE422_1 E16
DRIVE422_2 F16
DRIVE422_3 G16
DRIVE422_SIO0 034
DRIVE422_SIO1 034
DRIVE422_SIO2 034
DRIVE422_SIO3 034
SIO_INT [3]
SIO_INT [2]
SIO_INT [1]
SIO_INT [0]
SIO_CTRL [3]
SIO_CTRL [2]
SIO_CTRL [1]
SIO_CTRL [0]

IC3232 TC74VHC245FT (EKJ)
+3.3V-2 C3233 0.1uF
GPI_IN [7] GPI_IN [6] GPI_IN [5] GPI_IN [4] GPI_IN [3] GPI_IN [2] GPI_IN [1] GPI_IN [0]
D3234 D3236 D3238 D3240 D3242 D3244 D3246 D3248 DA221-TL
RB3235 1k
RB3239 10k
RB3241 10k
RB3236 1k
C3235 C3237 C3239 C3241 C3243 C3245 C3247 C3249 0.1uF
GPI1_IN8 001
GPI1_IN7 001
GPI1_IN6 001
GPI1_IN5 001
GPI1_IN4 001
GPI1_IN3 001
GPI1_IN2 001
GPI1_IN1 001

IC3233 TC74VHC245FT (EKJ)
+3.3V-2 C3234 0.1uF
GPI_IN [15] GPI_IN [14] GPI_IN [13] GPI_IN [12] GPI_IN [11] GPI_IN [10] GPI_IN [9] GPI_IN [8]
D3235 D3237 D3239 D3241 D3243 D3245 D3247 D3249 DA221-TL
RB3237 1k
RB3240 10k
RB3242 10k
RB3238 1k
C3236 C3238 C3240 C3242 C3244 C3246 C3248 C3250 0.1uF
GPI2_IN8 001
GPI2_IN7 001
GPI2_IN6 001
GPI2_IN5 001
GPI2_IN4 001
GPI2_IN3 001
GPI2_IN2 001
GPI2_IN1 001

IC3234 TC74VHC245FT (EKJ)
+3.3V-2 C3251 0.1uF
GPI_OUT [7] GPI_OUT [6] GPI_OUT [5] GPI_OUT [4] GPI_OUT [3] GPI_OUT [2] GPI_OUT [1] GPI_OUT [0]
RB3243 47
RB3244 47
R3242 10k
GPI1_OUT8 001
GPI1_OUT7 001
GPI1_OUT6 001
GPI1_OUT5 001
GPI1_OUT4 001
GPI1_OUT3 001
GPI1_OUT2 001
GPI1_OUT1 001

IC3235 TC74VHC245FT (EKJ)
+3.3V-2 C3252 0.1uF
GPI_OUT [15] GPI_OUT [14] GPI_OUT [13] GPI_OUT [12] GPI_OUT [11] GPI_OUT [10] GPI_OUT [9] GPI_OUT [8]
RB3245 47
RB3246 47
R3243 10k
GPI2_OUT8 001
GPI2_OUT7 001
GPI2_OUT6 001
GPI2_OUT5 001
GPI2_OUT4 001
GPI2_OUT3 001
GPI2_OUT2 001
GPI2_OUT1 001

SIO_CTRLS 033

008. 014. 017. 039 EXT_INT
007. 033. 039 BUS_C16_DATA
006. 033. 039 BUS_C_ADDR
007. 008. 033. 039 BUS_C_CTRL
BUSY_PERI

IC5 (4/8)
XC3S200AN-4FTG256C4136

BUS_C_ADDR [0] A3
BUS_C_ADDR [1] A4
BUS_C_ADDR [2] B3
BUS_C_ADDR [3] B4
BUS_C_ADDR [4] A5
BUS_C_ADDR [5] A6
BUS_C_ADDR [6] A7
BUS_C_ADDR [7] B6
ADDR [0]
ADDR [1]
ADDR [2]
ADDR [3]
ADDR [4]
ADDR [5]
ADDR [6]
ADDR [7]
DATA [0] A9
DATA [1] A10
DATA [2] B10
DATA [3] A11
DATA [4] A12
DATA [5] A13
DATA [6] B12
DATA [7] A14
BUS_C16_DATA [24]
BUS_C16_DATA [25]
BUS_C16_DATA [26]
BUS_C16_DATA [27]
BUS_C16_DATA [28]
BUS_C16_DATA [29]
BUS_C16_DATA [30]
BUS_C16_DATA [31]
CS_PERI C4
BUS_C16_WE C5
BUS_C16_OE C6
CS
WE
OE
BUS_BUSY C7
INT_A D8
INT_B D9
INT_POWER_FAIL D7
INT_PERI
INT_SELF_JTAG
INT_AC_FAIL
SYSCLK_P A8
SYSCLK_N B8
CLK33M C10
RESET_IN D6
007 LBCLK2_P
007 LBCLK2_N
004. 033 CA_RESET_A2
+3.3V-2
RB3233 10k
R3201 47
C3253 0.1uF
R3202 22
X3201 33.333MHz
VDD CONT OUT GND

CPU I/F

CA-82 (33/41)
SUFFIX: -13

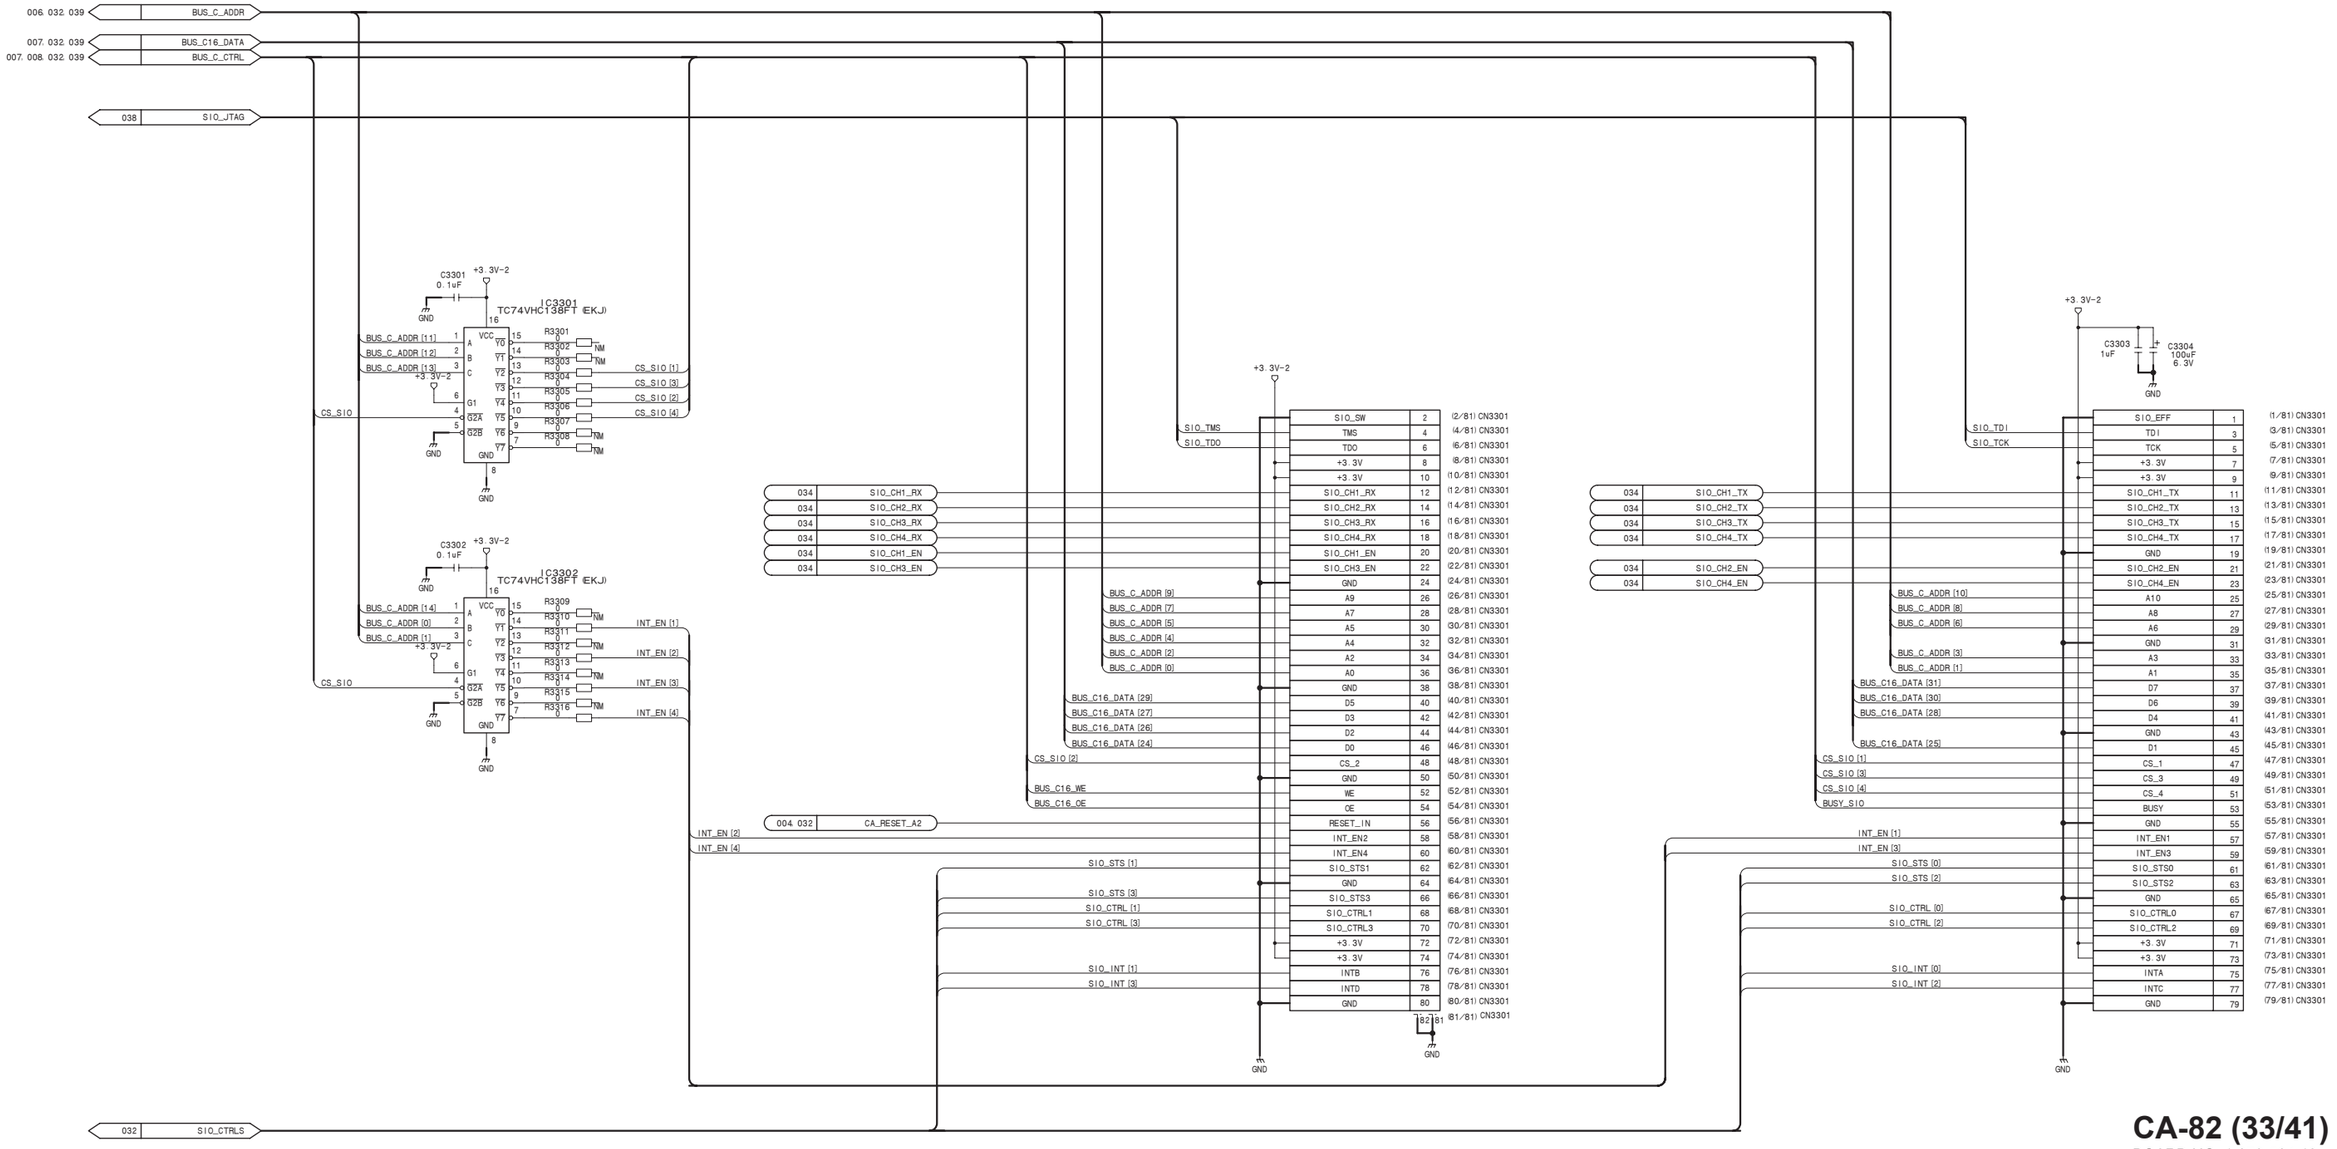

CA-82 (33/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_33

CA-82 (34/41)
SUFFIX: -13

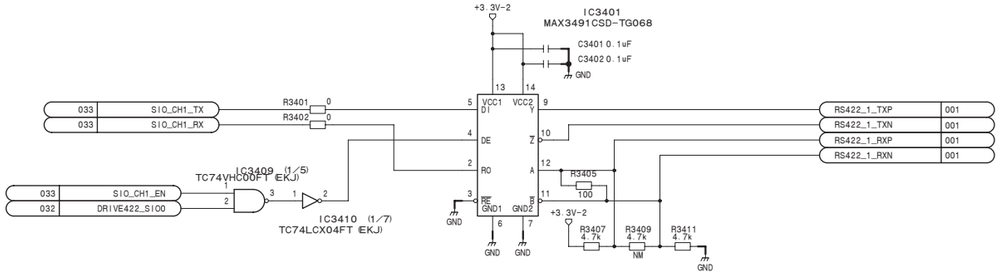

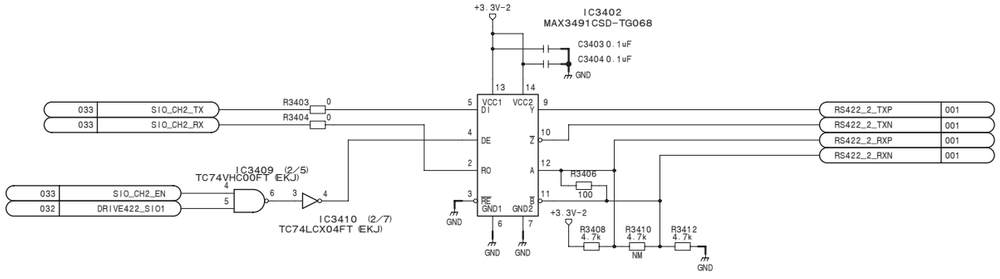

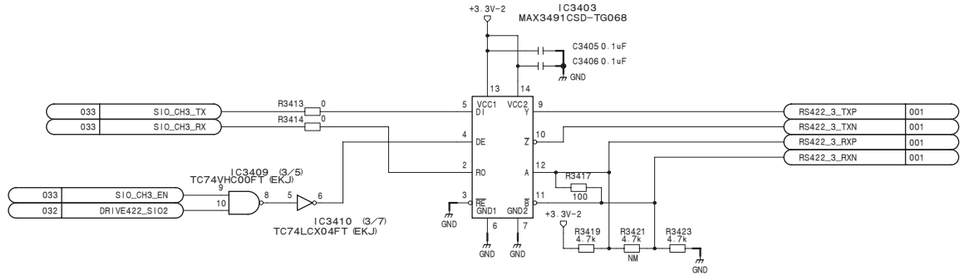

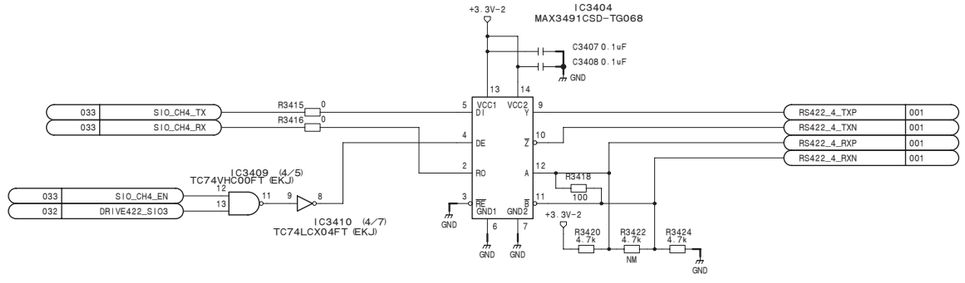

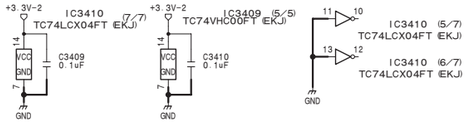

CA-82 (34/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_34

CA-82 (35/41)
SUFFIX: -13

FAN CTRL
Board Info

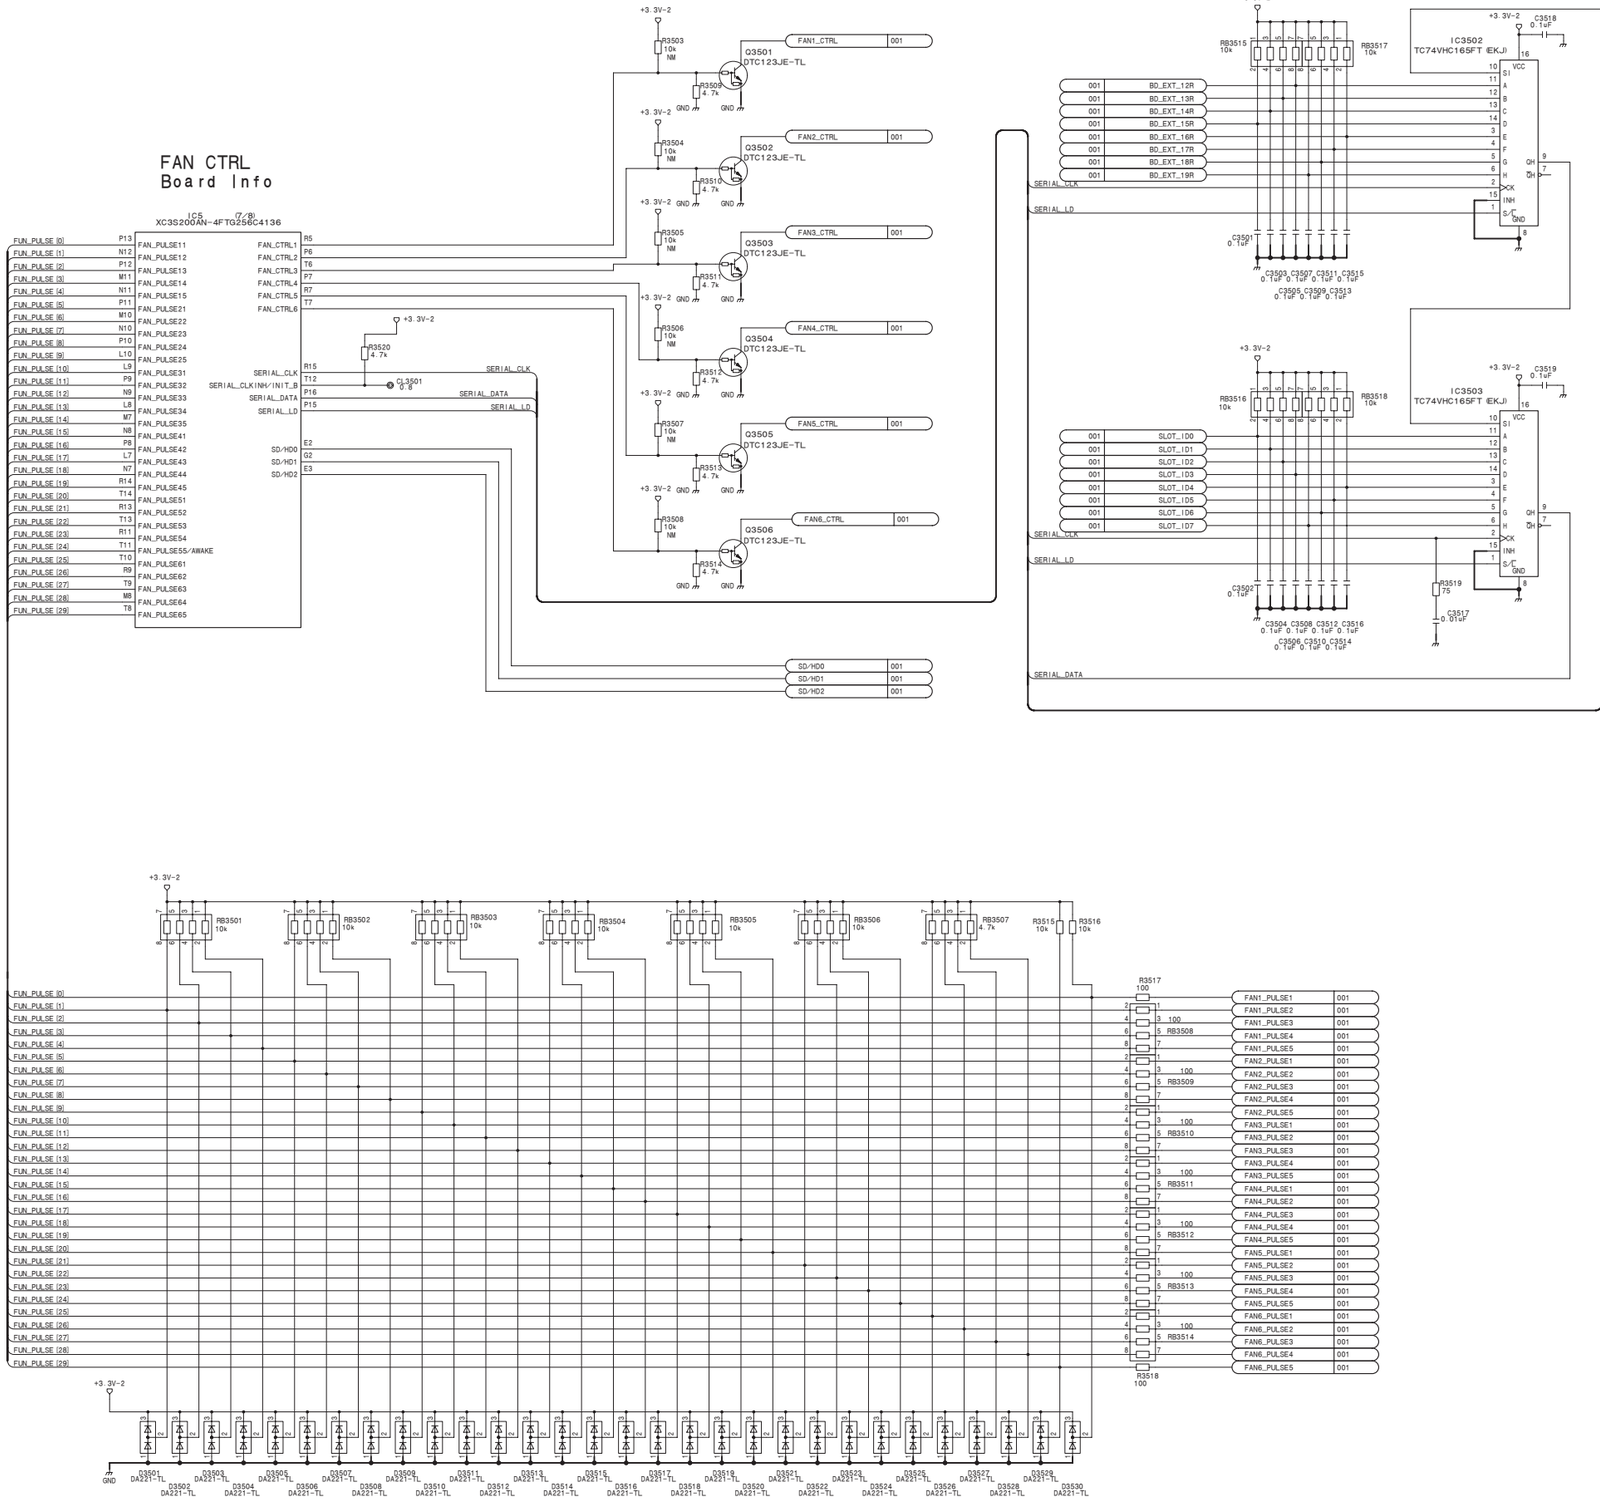

CA-82 (35/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_35

CA-82 (36/41)
SUFFIX: -13

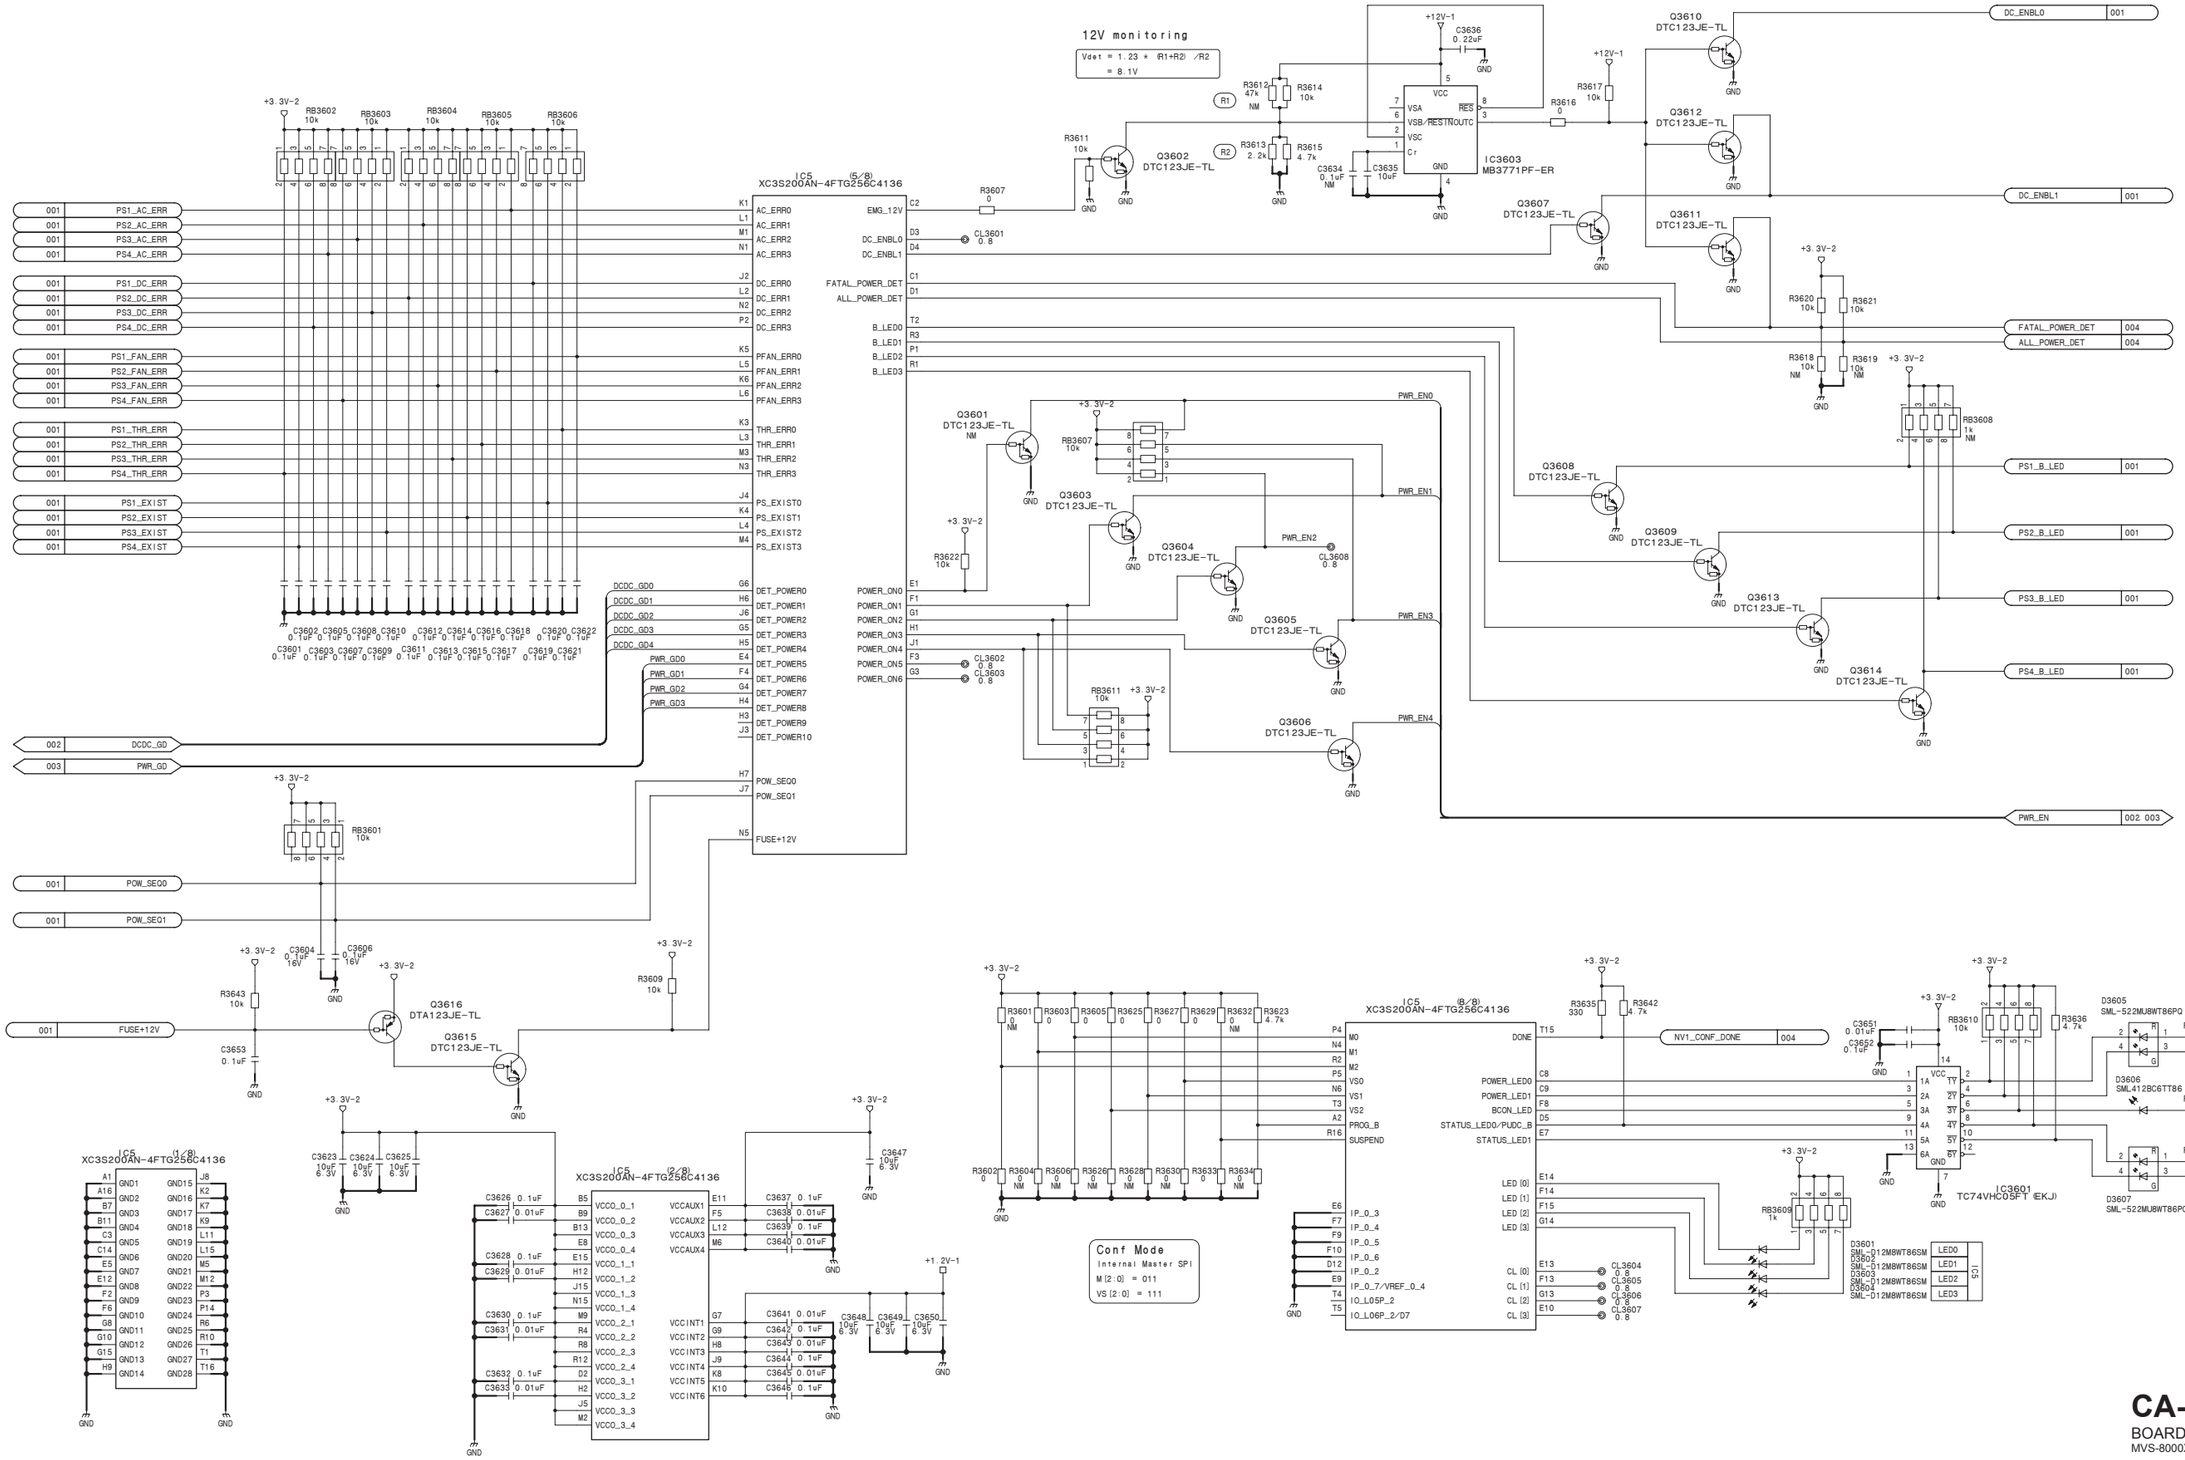

4-38

CA-82 (36/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_36

CA-82 (37/41)
SUFFIX: -13

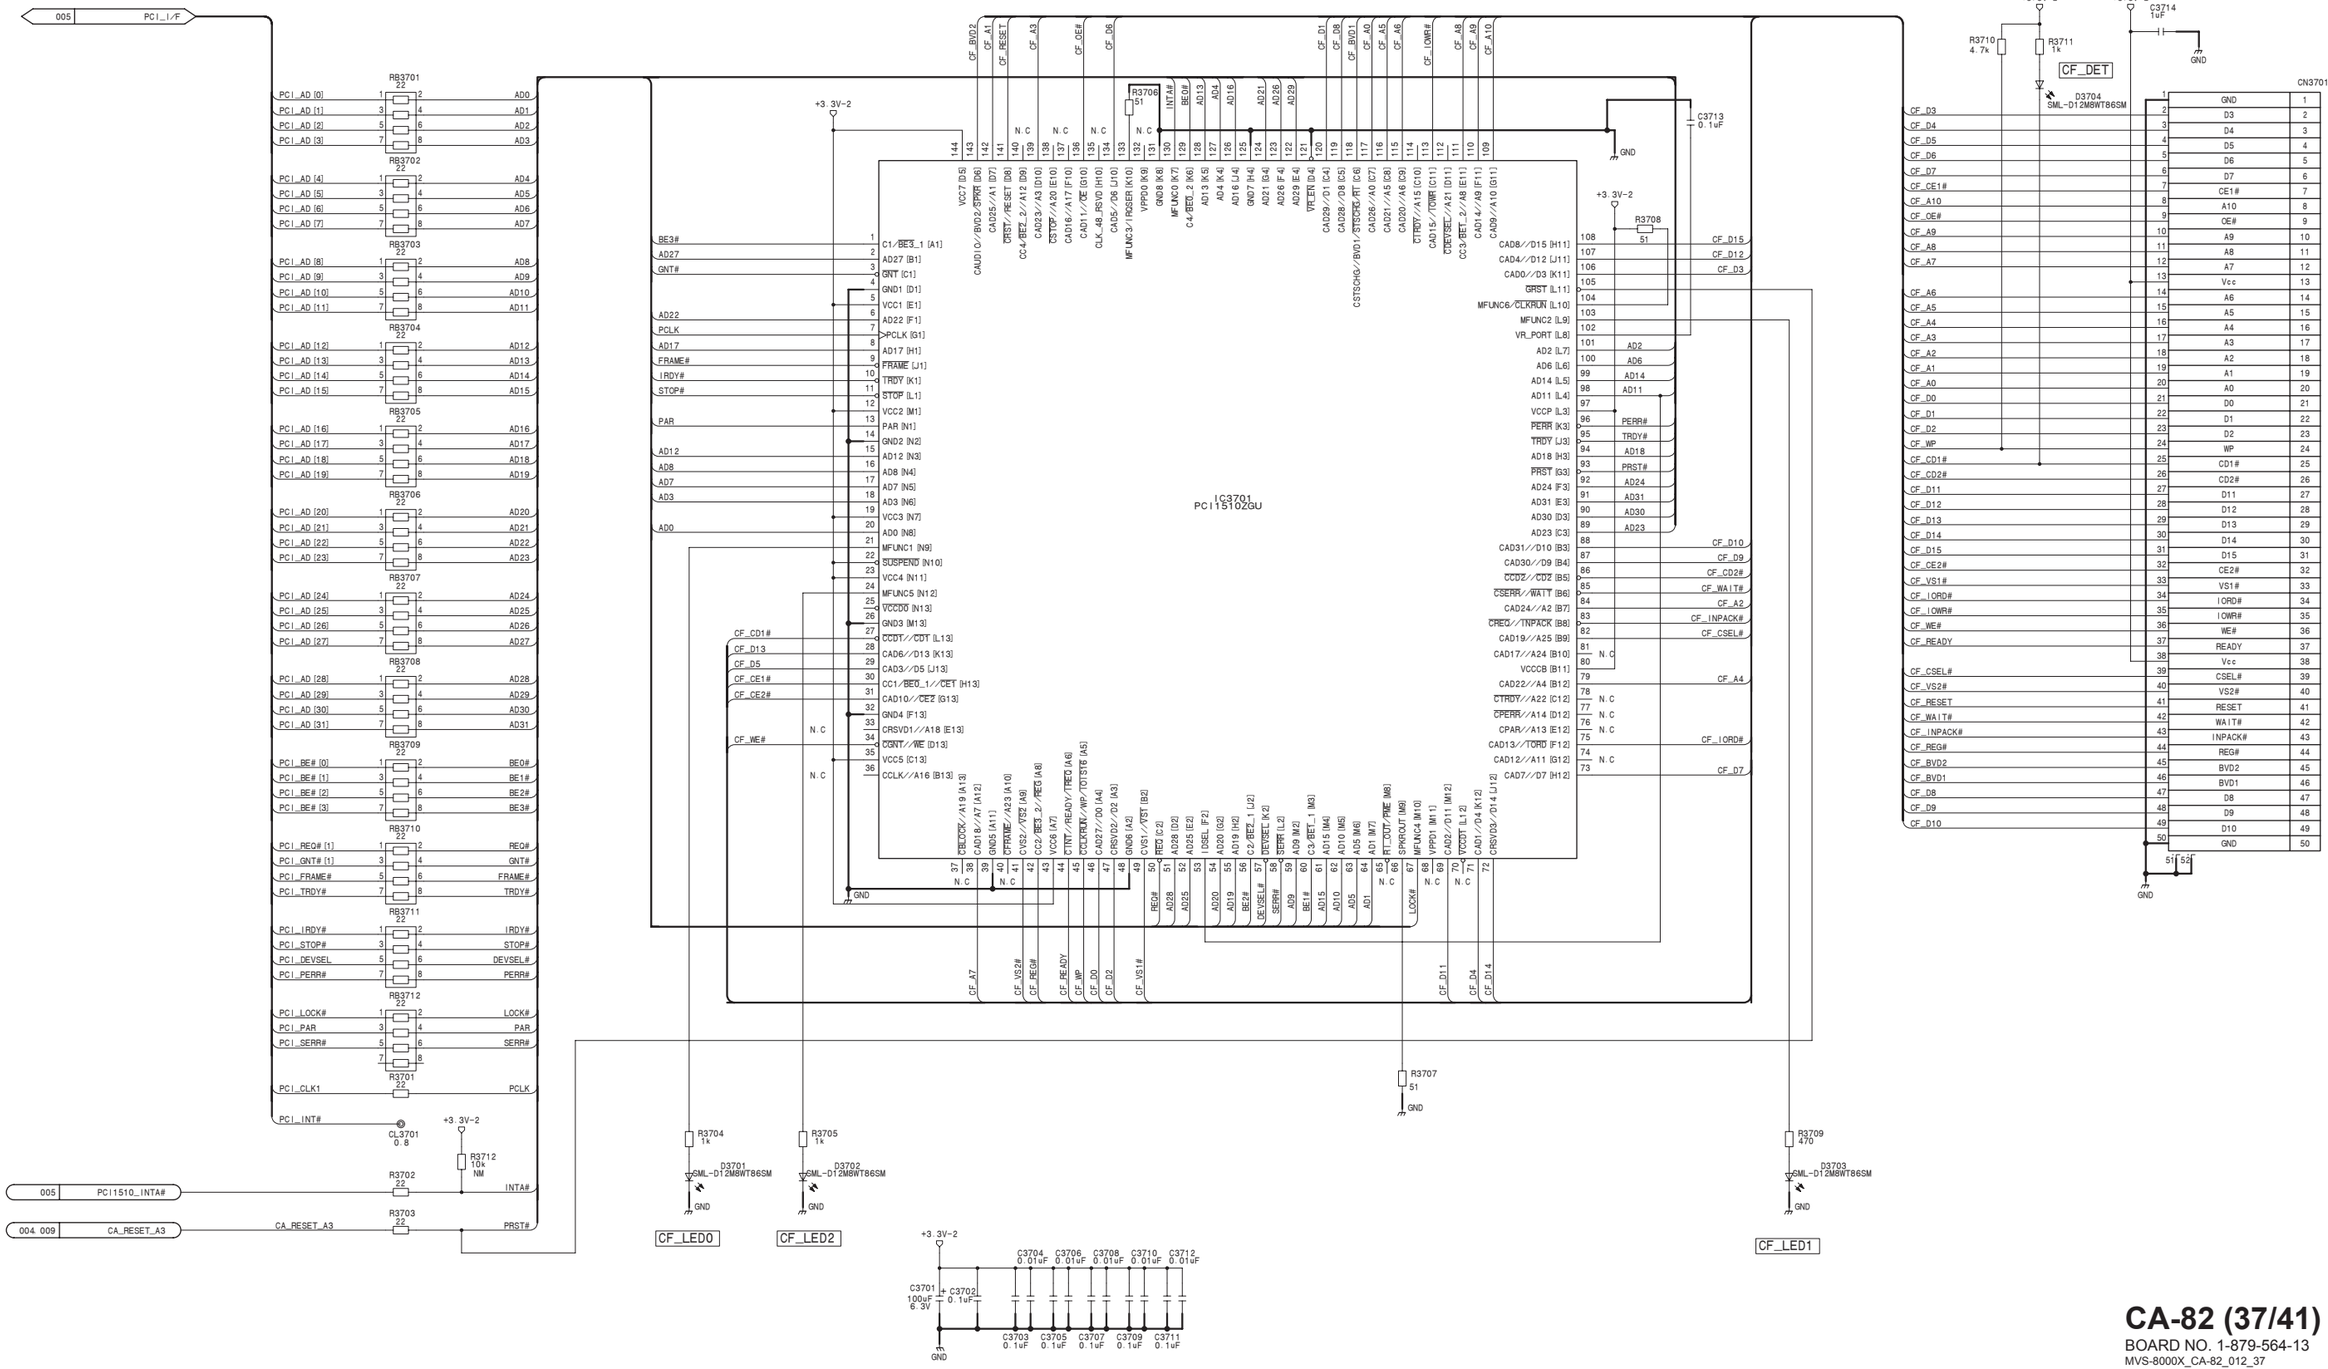

CA-82 (37/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_37

CA-82 (38/41)
SUFFIX: -13

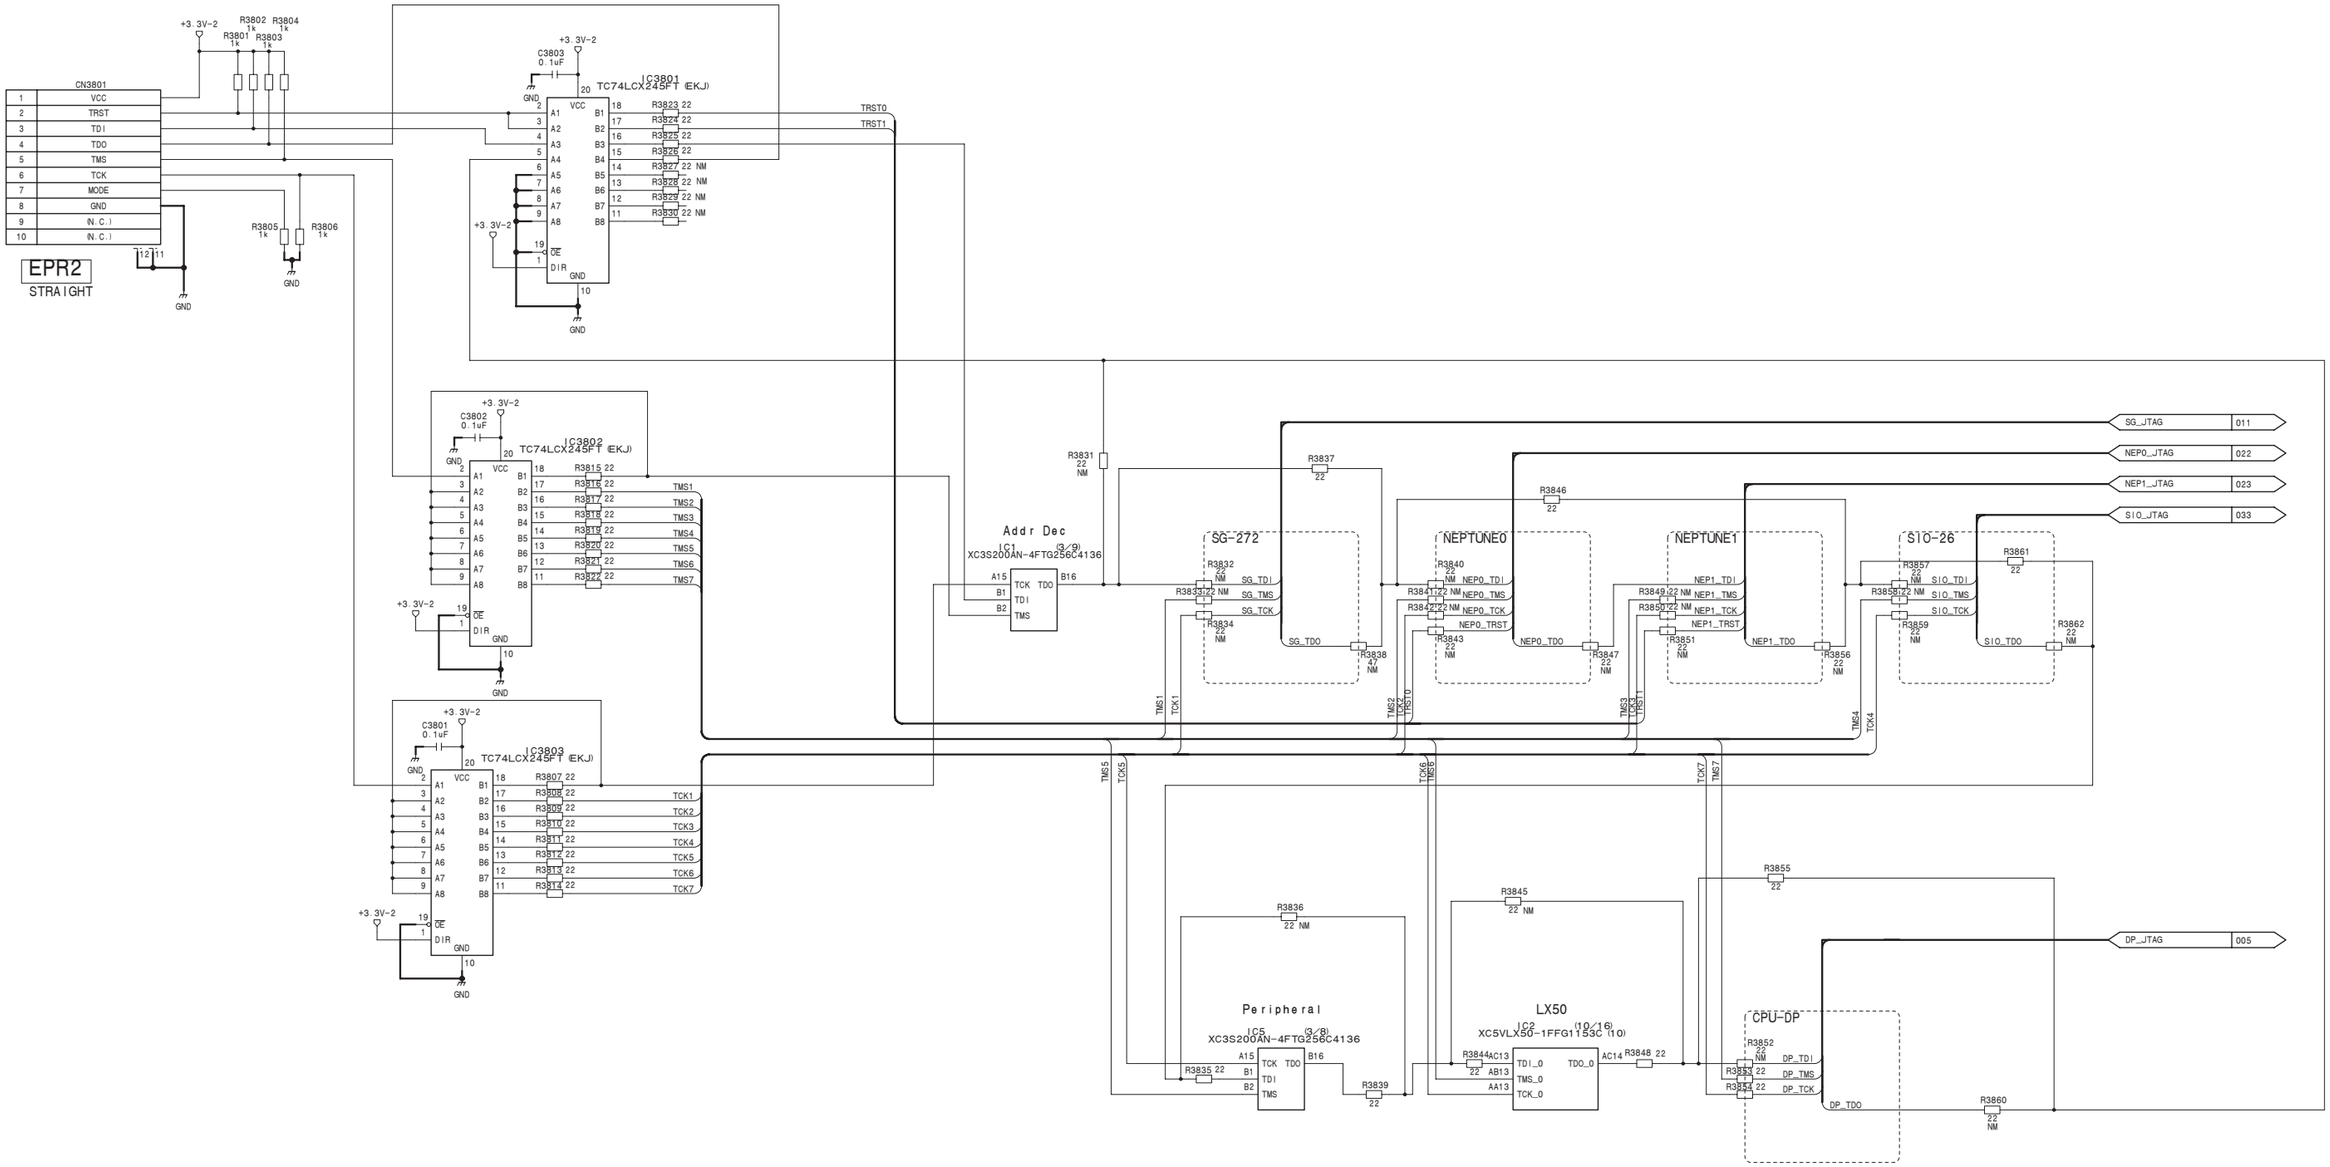

4-40

CA-82 (39/41)
SUFFIX: -13

006. 032. 033 BUS_C_ADDR
007. 032. 033 BUS_C16_DATA
007. 008. 032. 033 BUS_C_CTRL
008. 014. 017. 032 EXT_INT

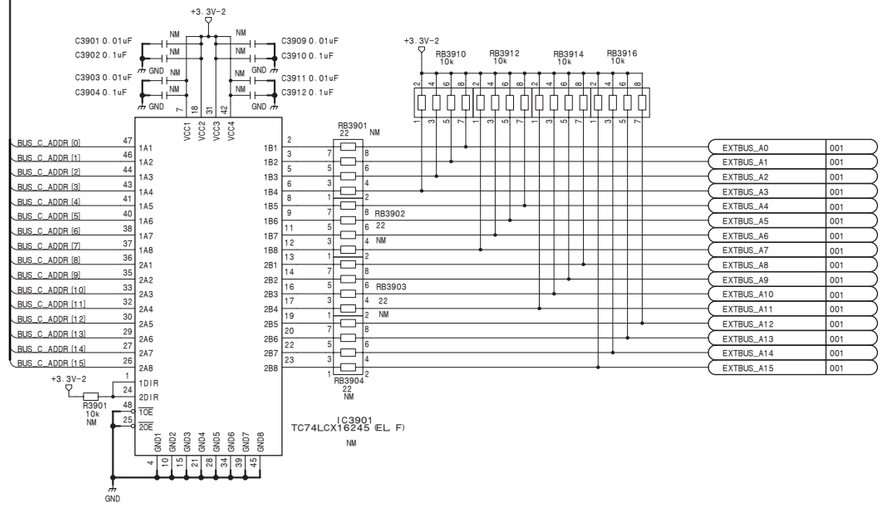

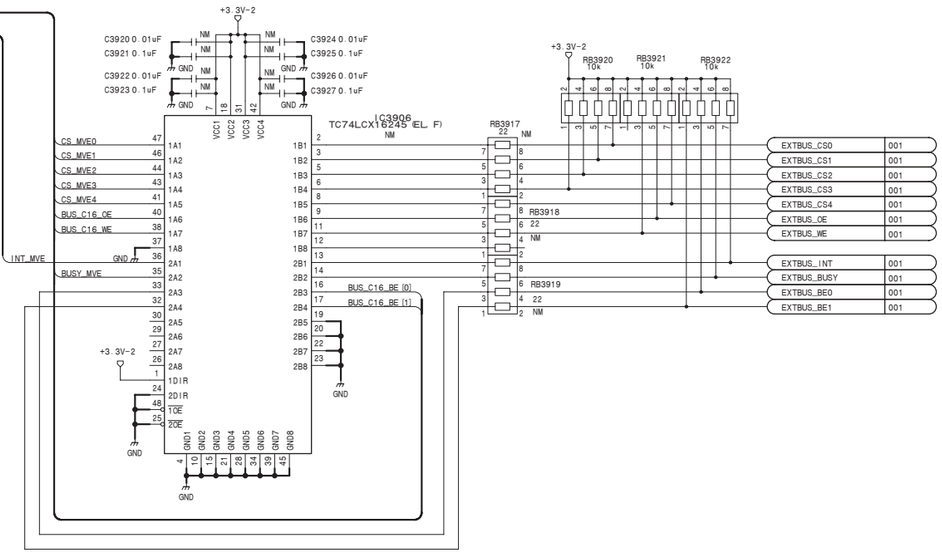

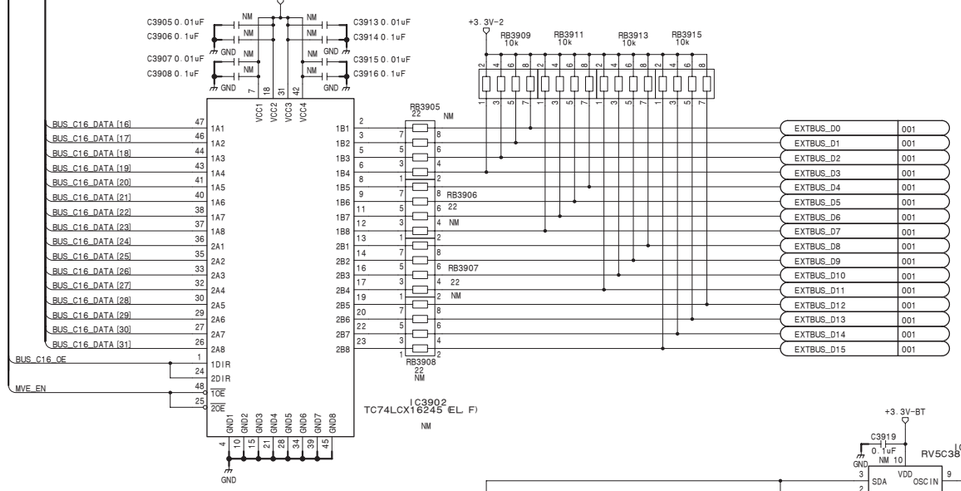

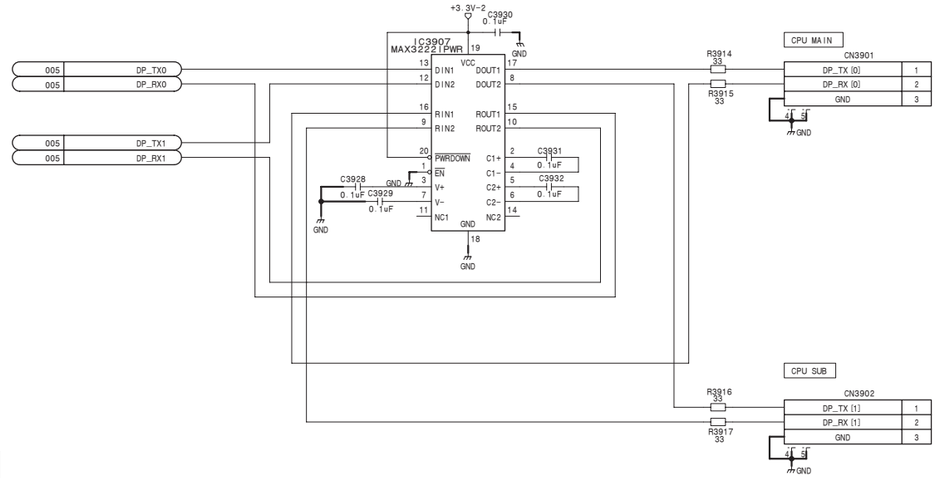

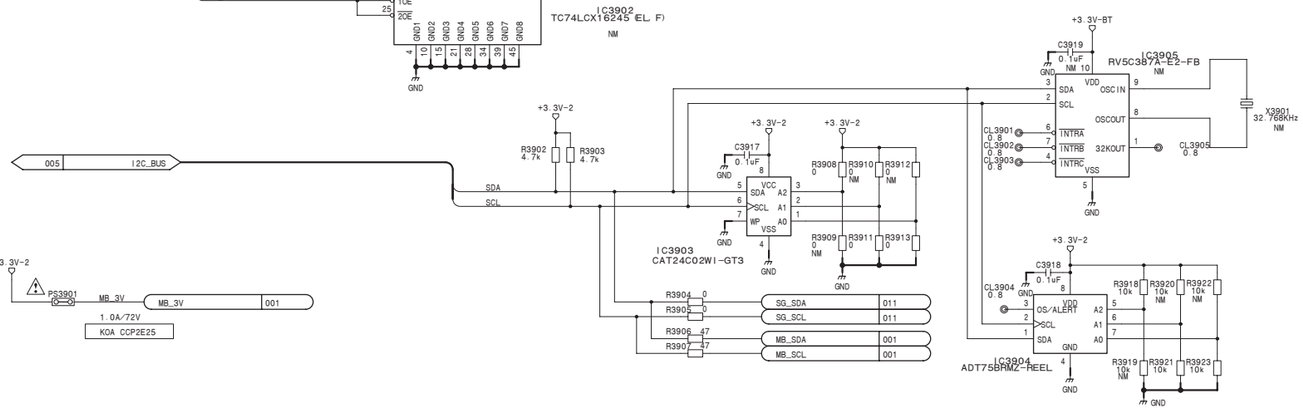

CA-82 (39/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_39

CA-82 (40/41)
SUFFIX: -13

027 DEBUG_SGMII0

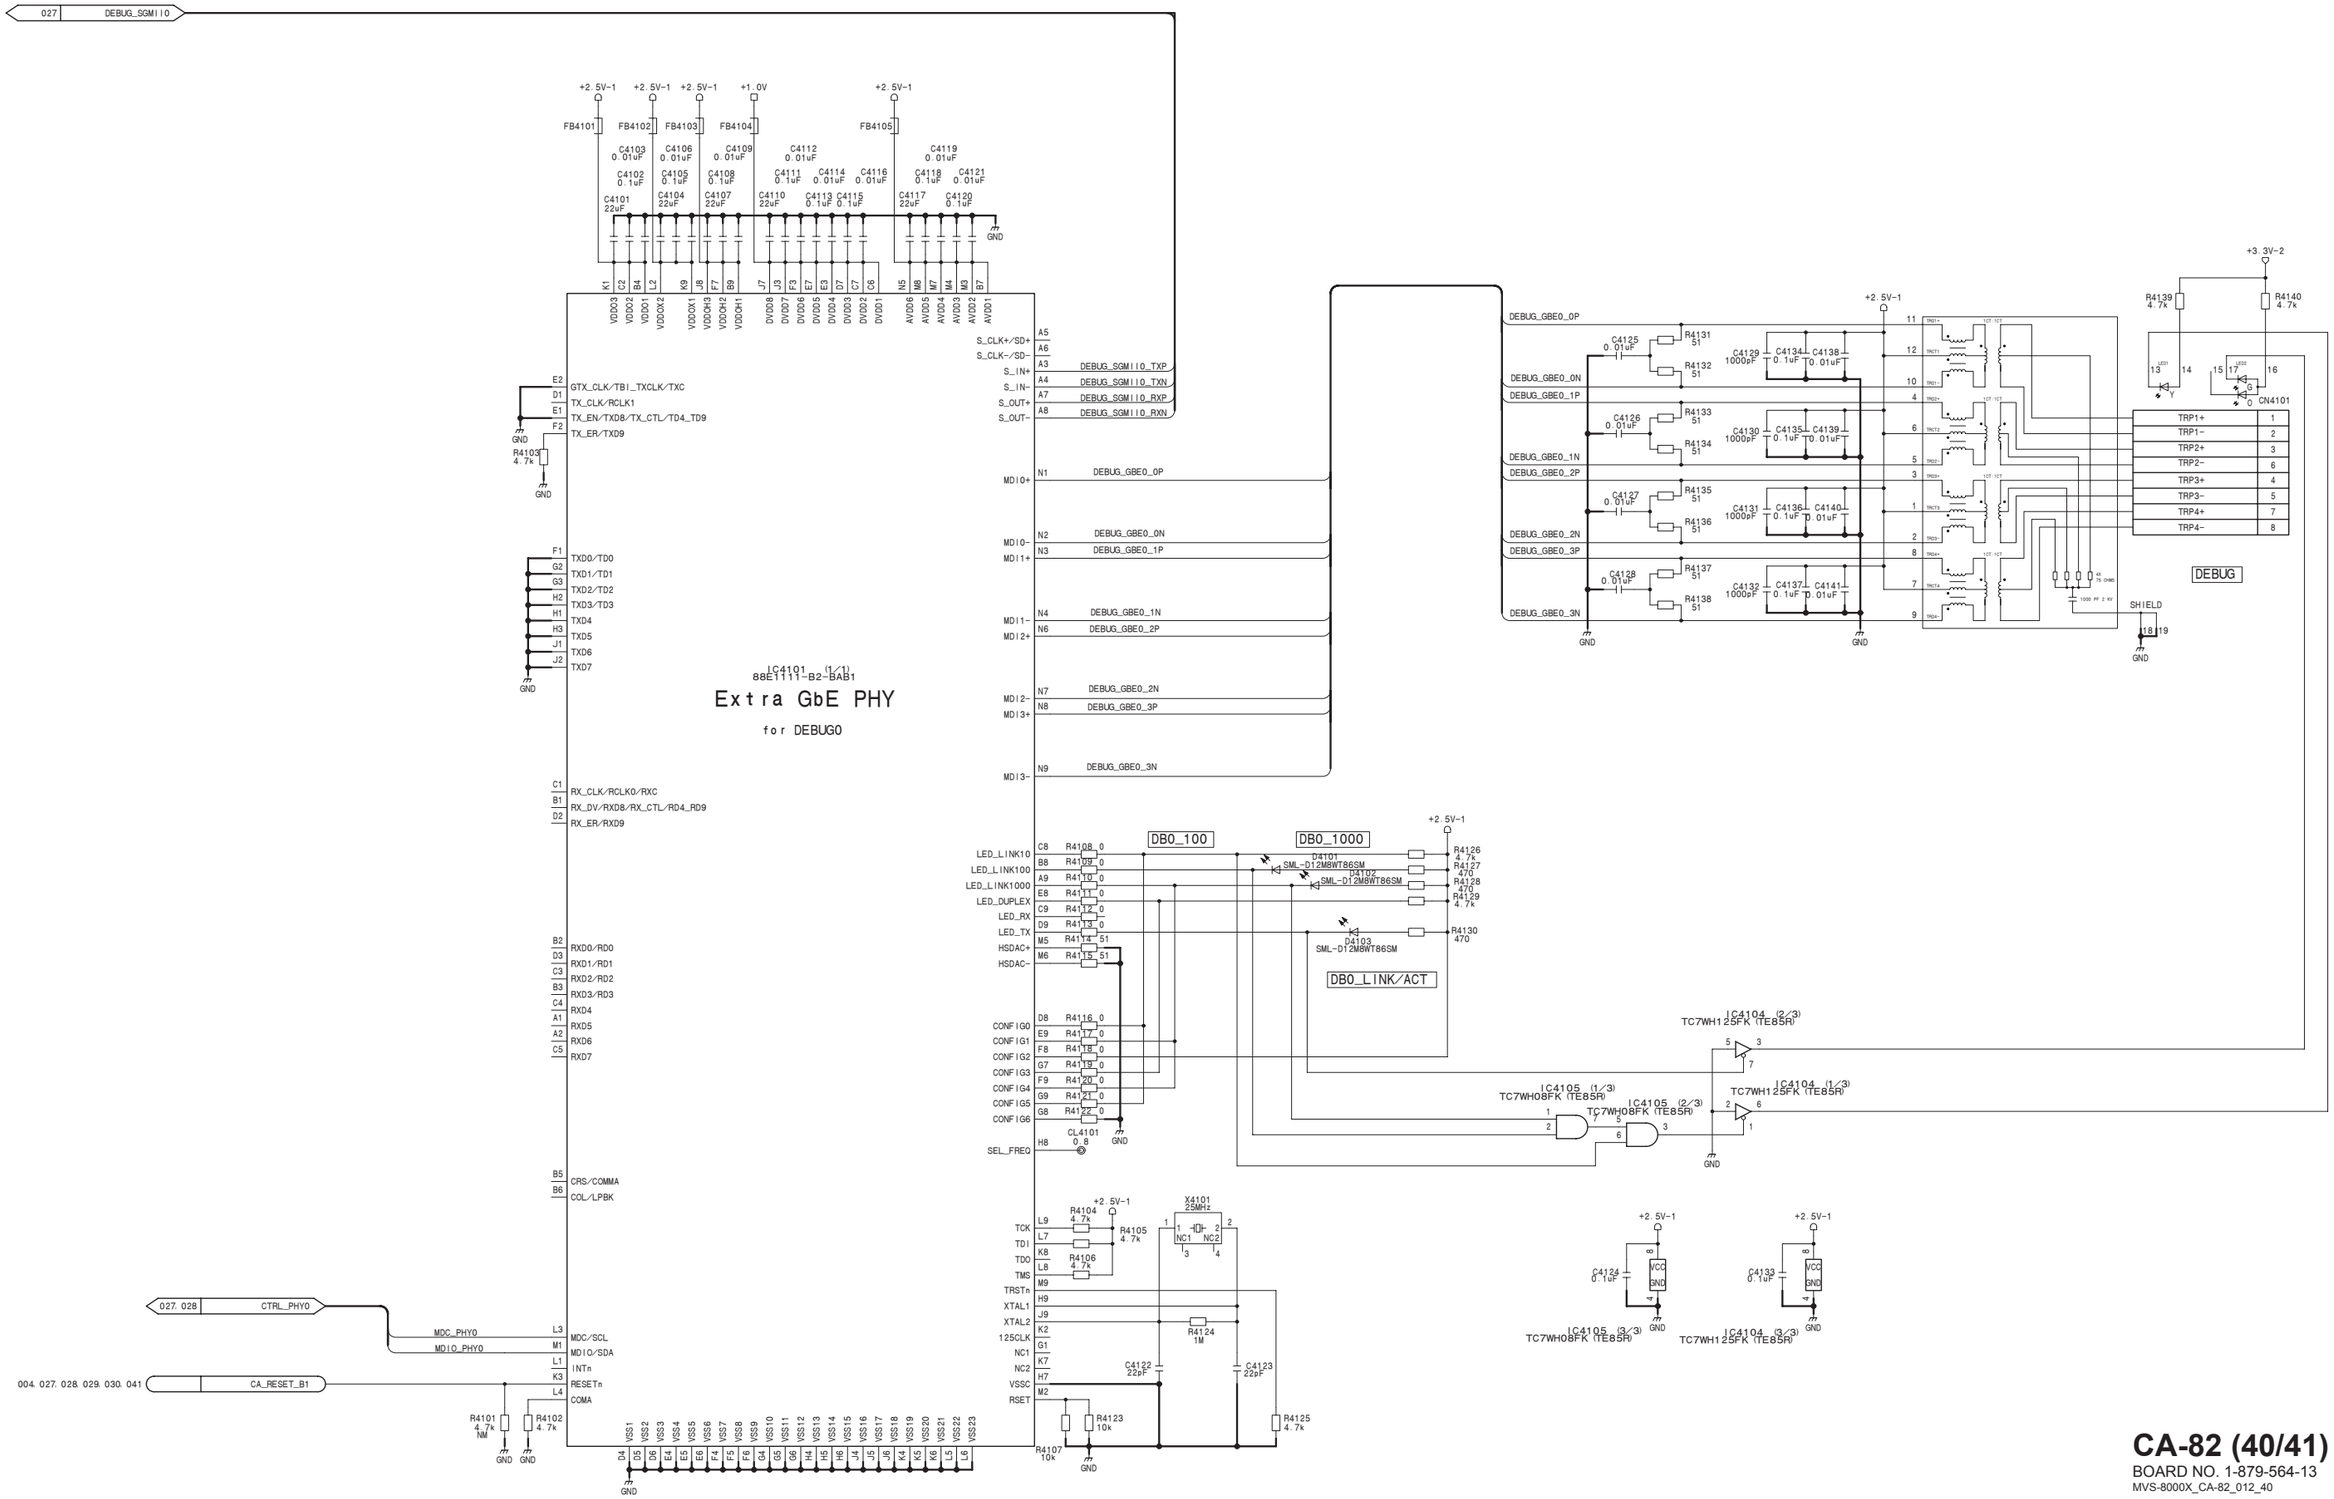

4-42

CA-82 (40/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_40

CA-82 (41/41)
SUFFIX: -13

029 DEBUG_SGMII1

Extra GbE PHY

for DEBUG1

IC4202
88E1111-B2-BAB1
NM

CA-82 (41/41)
BOARD NO. 1-879-564-13
MVS-8000X_CA-82_012_41

CA-82 (1/42)
SUFFIX: -14

Leftmost

K

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	DC_ENBL0 (EMG)	DC_ENBL1 (Normal)	GND	SD/HD0	FUSE+12V	GND
6	GND (BD_EXIST_17F)	(BD_EXIST_17R)	GND	SD/HD1	SD/HD2	GND
7	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
8	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10	RESET0	RESET1	GND	RESET2	RESET3	GND

HD/SD : high -> SD, Low -> HD

CNC1

	A	B	BG	C	D	DG
1	VCLK0P	VCLK0N	GND	VCLK1P	VCLK1N	GND
2	VCLK2P	VCLK2N	GND	VCLK3P	VCLK3N	GND
3	VCLK4P	VCLK4N	GND	VCLK5P	VCLK5N	GND
4	VCLK6P	VCLK6N	GND	VCLK7P	VCLK7N	GND
5	VCLK8P	VCLK8N	GND	VCLK9P	VCLK9N	GND
6	VCLK10P	VCLK10N	GND	VCLK11P	VCLK11N	GND
7	VCLK12P	VCLK12N	GND			GND
8	FD0P	FD0N	GND	VD0P	VD0N	GND
9	FD1P	FD1N	GND	VD1P	VD1N	GND
10	FD2P	FD2N	GND	VD2P	VD2N	GND

CND1

	A	B	BG	C	D	DG
1	FD3P	FD3N	GND	VD3P	VD3N	GND
2	FD4P	FD4N	GND	VD4P	VD4N	GND
3	FD5P	FD5N	GND	VD5P	VD5N	GND
4	FD6P	FD6N	GND	VD6P	VD6N	GND
5	FD7P	FD7N	GND	VD7P	VD7N	GND
6	FD8P	FD8N	GND	VD8P	VD8N	GND
7	FD9P	FD9N	GND	VD9P	VD9N	GND
8	FD10P	FD10N	GND	VD10P	VD10N	GND
9	FD11P	FD11N	GND	VD11P	VD11N	GND
10	FD12P	FD12N	GND	VD12P	VD12N	GND

CNJ1

	A	B	BG	C	D	DG
1	EXTBUS_CS4		GND	EXTBUS_INT	EXTBUS_BUSY	GND
2	INET0_TRX0P	INET0_TRX0N	GND	INET0_TRX1P	INET0_TRX1N	GND
3	INET0_TRX2P	INET0_TRX2N	GND	INET0_TRX3P	INET0_TRX3N	GND
4	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
5	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
6			GND			GND
7	INET2_TRX0P	INET2_TRX0N	GND	INET2_TRX1P	INET2_TRX1N	GND
8	INET2_TRX2P	INET2_TRX2N	GND	INET2_TRX3P	INET2_TRX3N	GND
9	INET3_TRX0P	INET3_TRX0N	GND	INET3_TRX1P	INET3_TRX1N	GND
10	INET3_TRX2P	INET3_TRX2N	GND	INET3_TRX3P	INET3_TRX3N	GND

CNK1

	A	B	BG	C	D	DG
1			GND			GND
2	INET4_TRX0P	INET4_TRX0N	GND	INET4_TRX1P	INET4_TRX1N	GND
3	INET4_TRX2P	INET4_TRX2N	GND	INET4_TRX3P	INET4_TRX3N	GND
4	INET5_TRX0P	INET5_TRX0N	GND	INET5_TRX1P	INET5_TRX1N	GND
5	INET5_TRX2P	INET5_TRX2N	GND	INET5_TRX3P	INET5_TRX3N	GND
6			GND			GND
7	INET6_TRX0P	INET6_TRX0N	GND	INET6_TRX1P	INET6_TRX1N	GND
8	INET6_TRX2P	INET6_TRX2N	GND	INET6_TRX3P	INET6_TRX3N	GND
9	INET7_TRX0P	INET7_TRX0N	GND	INET7_TRX1P	INET7_TRX1N	GND
10	INET7_TRX2P	INET7_TRX2N	GND	INET7_TRX3P	INET7_TRX3N	GND

CNL1

	A	B	BG	C	D	DG
1	BD_EXT_19F	BD_EXT_18F	GND	BD_EXT_19R	BD_EXT_18R	GND
2	BD_EXT_17F	BD_EXT_16F	GND	BD_EXT_17R	BD_EXT_16R	GND
3	BD_EXT_15F	BD_EXT_14F	GND	BD_EXT_15R	BD_EXT_14R	GND
4	BD_EXT_13F	BD_EXT_12F	GND	BD_EXT_13R	BD_EXT_12R	GND
5	BD_EXT_11F	BD_EXT_10F	GND	BD_EXT_11R	BD_EXT_10R	GND
6	BD_EXT_9F	BD_EXT_8F	GND	BD_EXT_9R	BD_EXT_8R	GND
7	BD_EXT_7F	BD_EXT_6F	GND	BD_EXT_7R	BD_EXT_6R	GND
8	BD_EXT_5F	BD_EXT_4F	GND	BD_EXT_5R	BD_EXT_4R	GND
9	BD_EXT_3F	BD_EXT_2F	GND	BD_EXT_3R	BD_EXT_2R	GND
10	BD_EXT_1F	BD_EXT_0F	GND	BD_EXT_1R	BD_EXT_0R	GND

K

CNE1

	A	B	BG	C	D	DG
1		TC_IN	GND		REF_IN0	GND
2	(REF_IN2)		GND	(REF_IN1)		GND
3	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
4	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
5	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB_RESET_IN	EXTHUB_RESET_OUT	GND
6	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
7			GND	EXTHUB1_INT		GND
8			GND			GND
9			GND			GND
10			GND			GND

K

CNF1

	A	B	BG	C	D	DG
1	GBE0_TRX2P	GBE0_TRX2N	GND	GBE0_TRX3P	GBE0_TRX3N	GND
2	GBE0_TRX0P	GBE0_TRX0N	GND	GBE0_TRX1P	GBE0_TRX1N	GND
3	GBE0_LED_L	GBE0_LED_R	GND	GBE1_LED_L	GBE1_LED_R	GND
4	GBE1_TRX2P	GBE1_TRX2N	GND	GBE1_TRX3P	GBE1_TRX3N	GND
5	GBE1_TRX0P	GBE1_TRX0N	GND	GBE1_TRX1P	GBE1_TRX1N	GND
6	GBE2_TRX2P	GBE2_TRX2N	GND	GBE2_TRX3P	GBE2_TRX3N	GND
7	GBE2_TRX0P	GBE2_TRX0N	GND	GBE2_TRX1P	GBE2_TRX1N	GND
8	GBE2_LED_L	GBE2_LED_R	GND	GBE3_LED_L	GBE3_LED_R	GND
9	GBE3_TRX2P	GBE3_TRX2N	GND	GBE3_TRX3P	GBE3_TRX3N	GND
10	GBE3_TRX0P	GBE3_TRX0N	GND	GBE3_TRX1P	GBE3_TRX1N	GND

CNG1

	A	B	BG	C	D	DG
1	EXTBUS_A0	EXTBUS_A1	GND	EXTBUS_D0	EXTBUS_D1	GND
2	EXTBUS_A2	EXTBUS_A3	GND	EXTBUS_D2	EXTBUS_D3	GND
3	EXTBUS_A4	EXTBUS_A5	GND	EXTBUS_D4	EXTBUS_D5	GND
4	EXTBUS_A6	EXTBUS_A7	GND	EXTBUS_D6	EXTBUS_D7	GND
5	EXTBUS_A8	EXTBUS_A9	GND	EXTBUS_D8	EXTBUS_D9	GND
6	EXTBUS_A10	EXTBUS_A11	GND	EXTBUS_D10	EXTBUS_D11	GND
7	EXTBUS_A12	EXTBUS_A13	GND	EXTBUS_D12	EXTBUS_D13	GND
8	EXTBUS_A14	EXTBUS_A15	GND	EXTBUS_D14	EXTBUS_D15	GND
9	EXTBUS_OE	EXTBUS_WE	GND	EXTBUS_BE0	EXTBUS_BE1	GND
10	EXTBUS_CS0	EXTBUS_CS1	GND	EXTBUS_CS2	EXTBUS_CS3	GND

K

CNM1

	A	B	BG	C	D	DG
1	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
2	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
3	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
4	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
5	GPI2_OUT1	GPI2_IN1	GND	GPI1_OUT1	GPI1_IN1	GND
6	GPI2_OUT2	GPI2_IN2	GND	GPI1_OUT2	GPI1_IN2	GND
7	GPI2_OUT3	GPI2_IN3	GND	GPI1_OUT3	GPI1_IN3	GND
8	GPI2_OUT4	GPI2_IN4	GND	GPI1_OUT4	GPI1_IN4	GND
9	GPI2_OUT5	GPI2_IN5	GND	GPI1_OUT5	GPI1_IN5	GND
10	GPI2_OUT6	GPI2_IN6	GND	GPI1_OUT6	GPI1_IN6	GND

K

CNN1

	A	B	BG	C	D	DG
1	GPI2_OUT7	GPI2_IN7	GND	GPI1_OUT7	GPI1_IN7	GND
2	GPI2_OUT8	GPI2_IN8	GND	GPI1_OUT8	GPI1_IN8	GND
3	POW_SEQ0	POW_SEQ1	GND			GND
4	FAN1_PULSE1	FAN1_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
5	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
6	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
7	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
8	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
9	FAN5_PULSE1	FAN5_PULSE2	GND	FAN5_PULSE3	FAN5_PULSE4	GND
10	FAN5_PULSE5	FAN6_PULSE1	GND	FAN6_PULSE2	FAN6_PULSE3	GND

CNP1

	A	B	BG	C	D	DG
1	FAN6_PULSE4	FAN6_PULSE5	GND	FAN1_CTRL	FAN2_CTRL	GND
2	FAN3_CTRL	FAN4_CTRL	GND	FAN5_CTRL	FAN6_CTRL	GND
3	PS1_B_LED		GND	PS1_FAN_ERR	PS1_THR_ERR	GND
4	PS1_EXIST		GND	PS1_DC_ERR	PS1_AC_ERR	GND
5	PS2_B_LED		GND	PS2_FAN_ERR	PS2_THR_ERR	GND
6	PS2_EXIST		GND	PS2_DC_ERR	PS2_AC_ERR	GND
7	PS3_B_LED		GND	PS3_FAN_ERR	PS3_THR_ERR	GND
8	PS3_EXIST		GND	PS3_DC_ERR	PS3_AC_ERR	GND
9	PS4_B_LED		GND	PS4_FAN_ERR	PS4_THR_ERR	GND
10	PS4_EXIST		GND	PS4_DC_ERR	PS4_AC_ERR	GND

Rightmost

HM-Zd Connector

CA-82 (1/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_1

MVS-8000X/7000X

4-3 (a)

4-3 (a)

A B C D E F G H

1 2 3 4 5

CA-82 (2/42) SUFFIX: -14

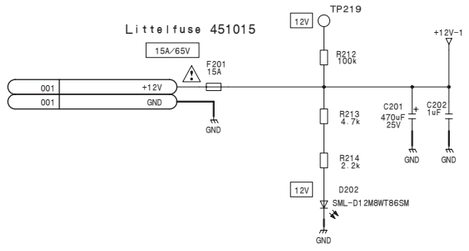

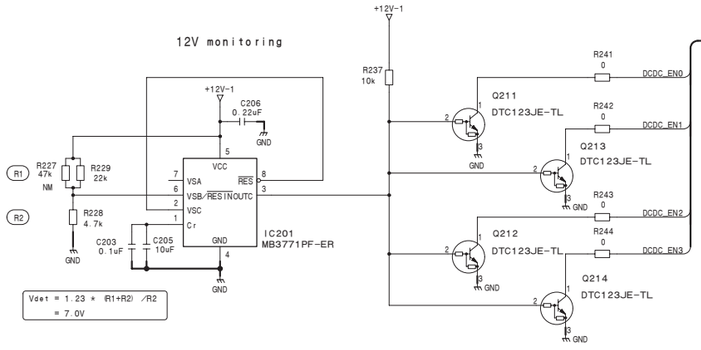

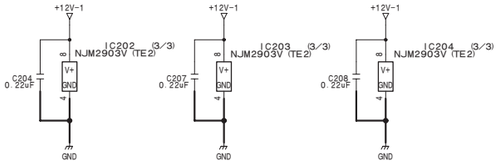

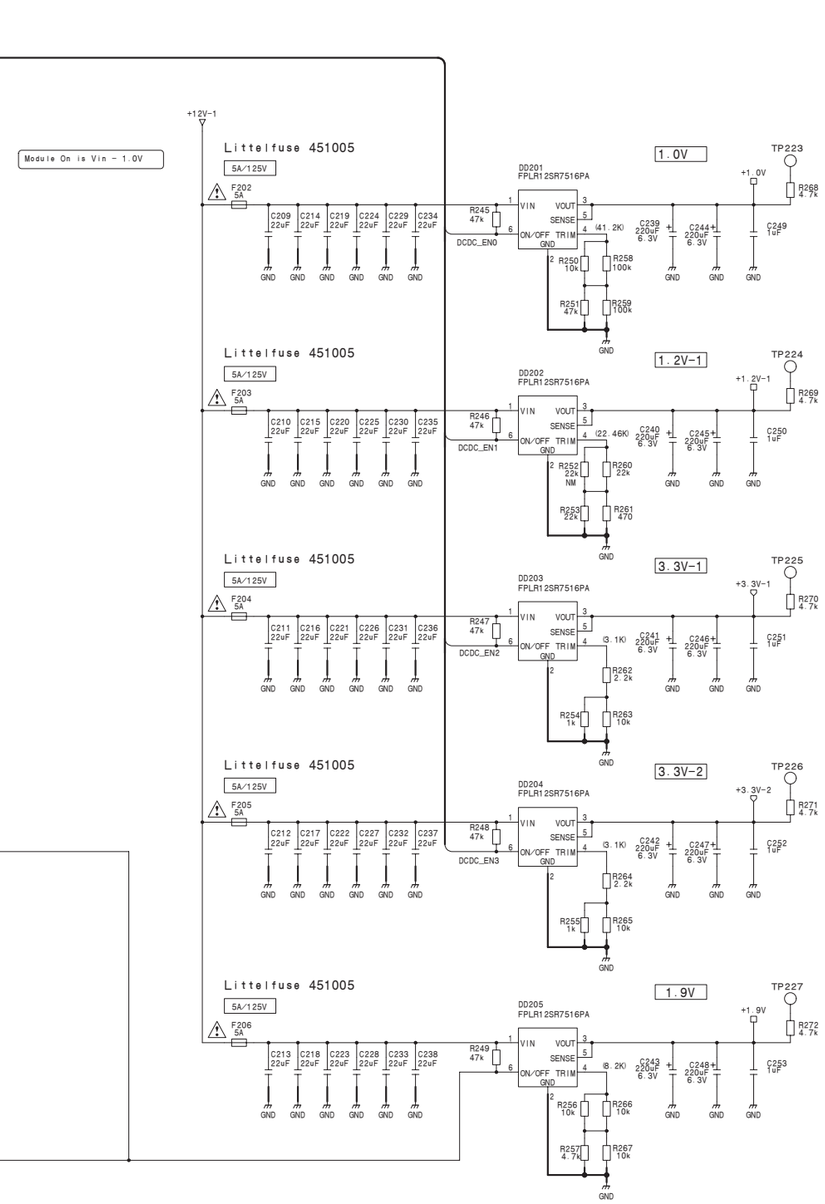

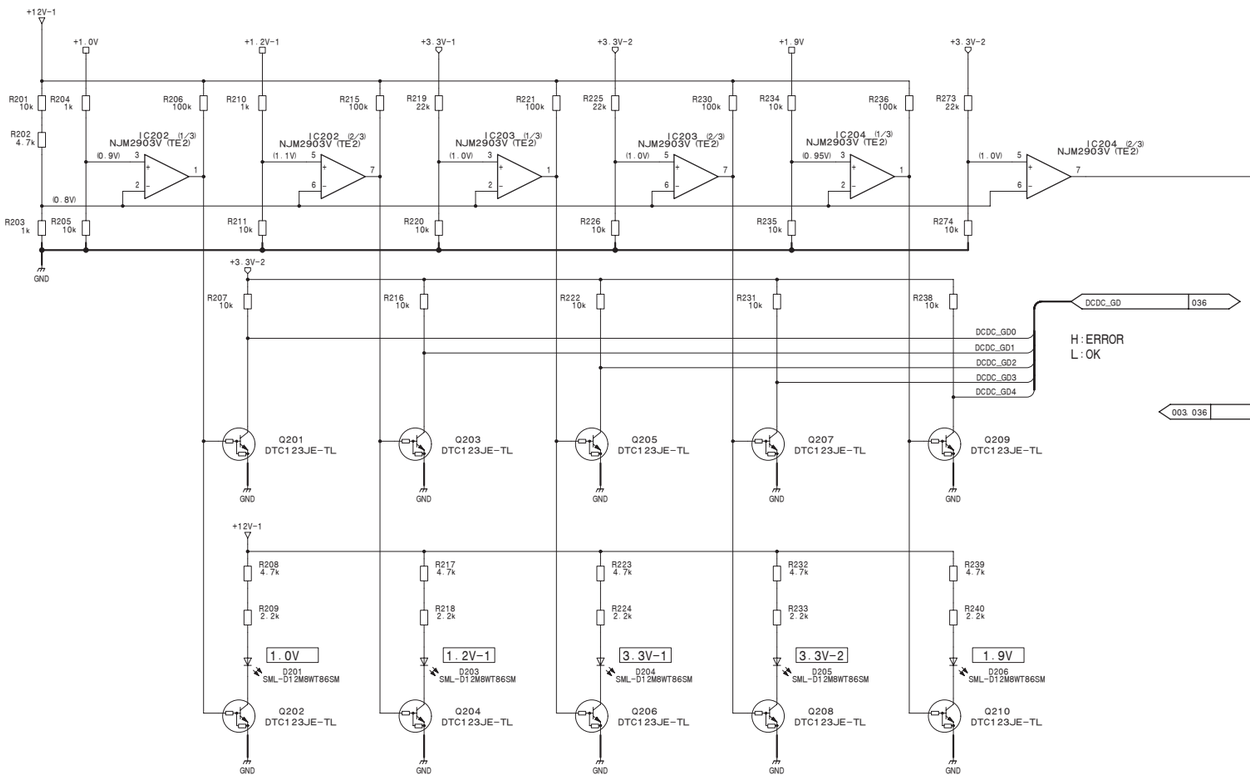

Power Supply 1/2

CA-82 (2/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_2

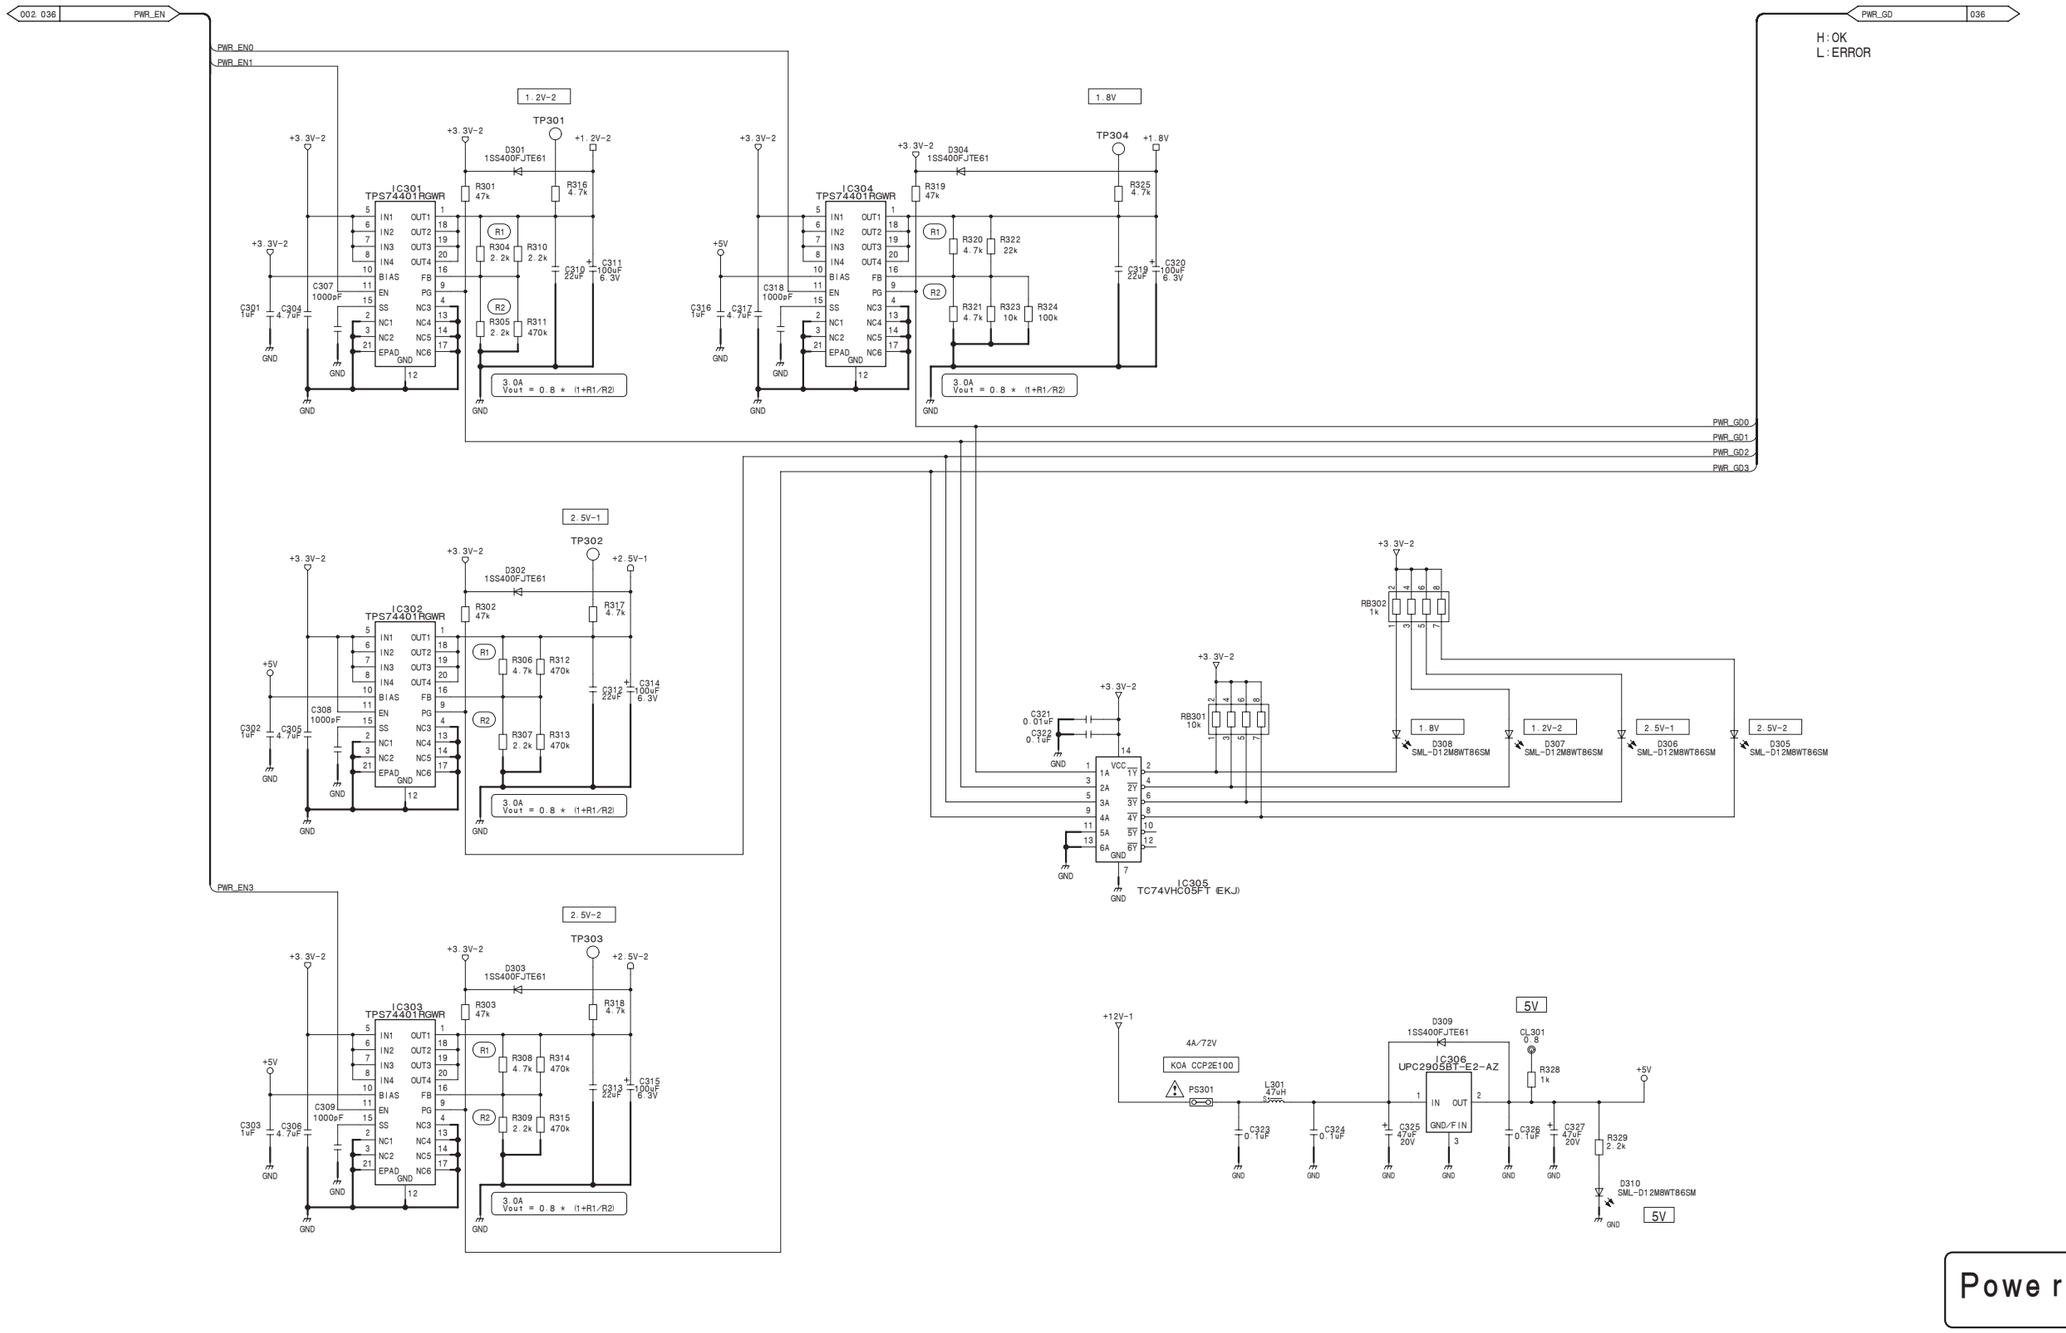

Power Supply 2/2

CA-82 (3/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_3

CA-82 (4/42)
SUFFIX: -14

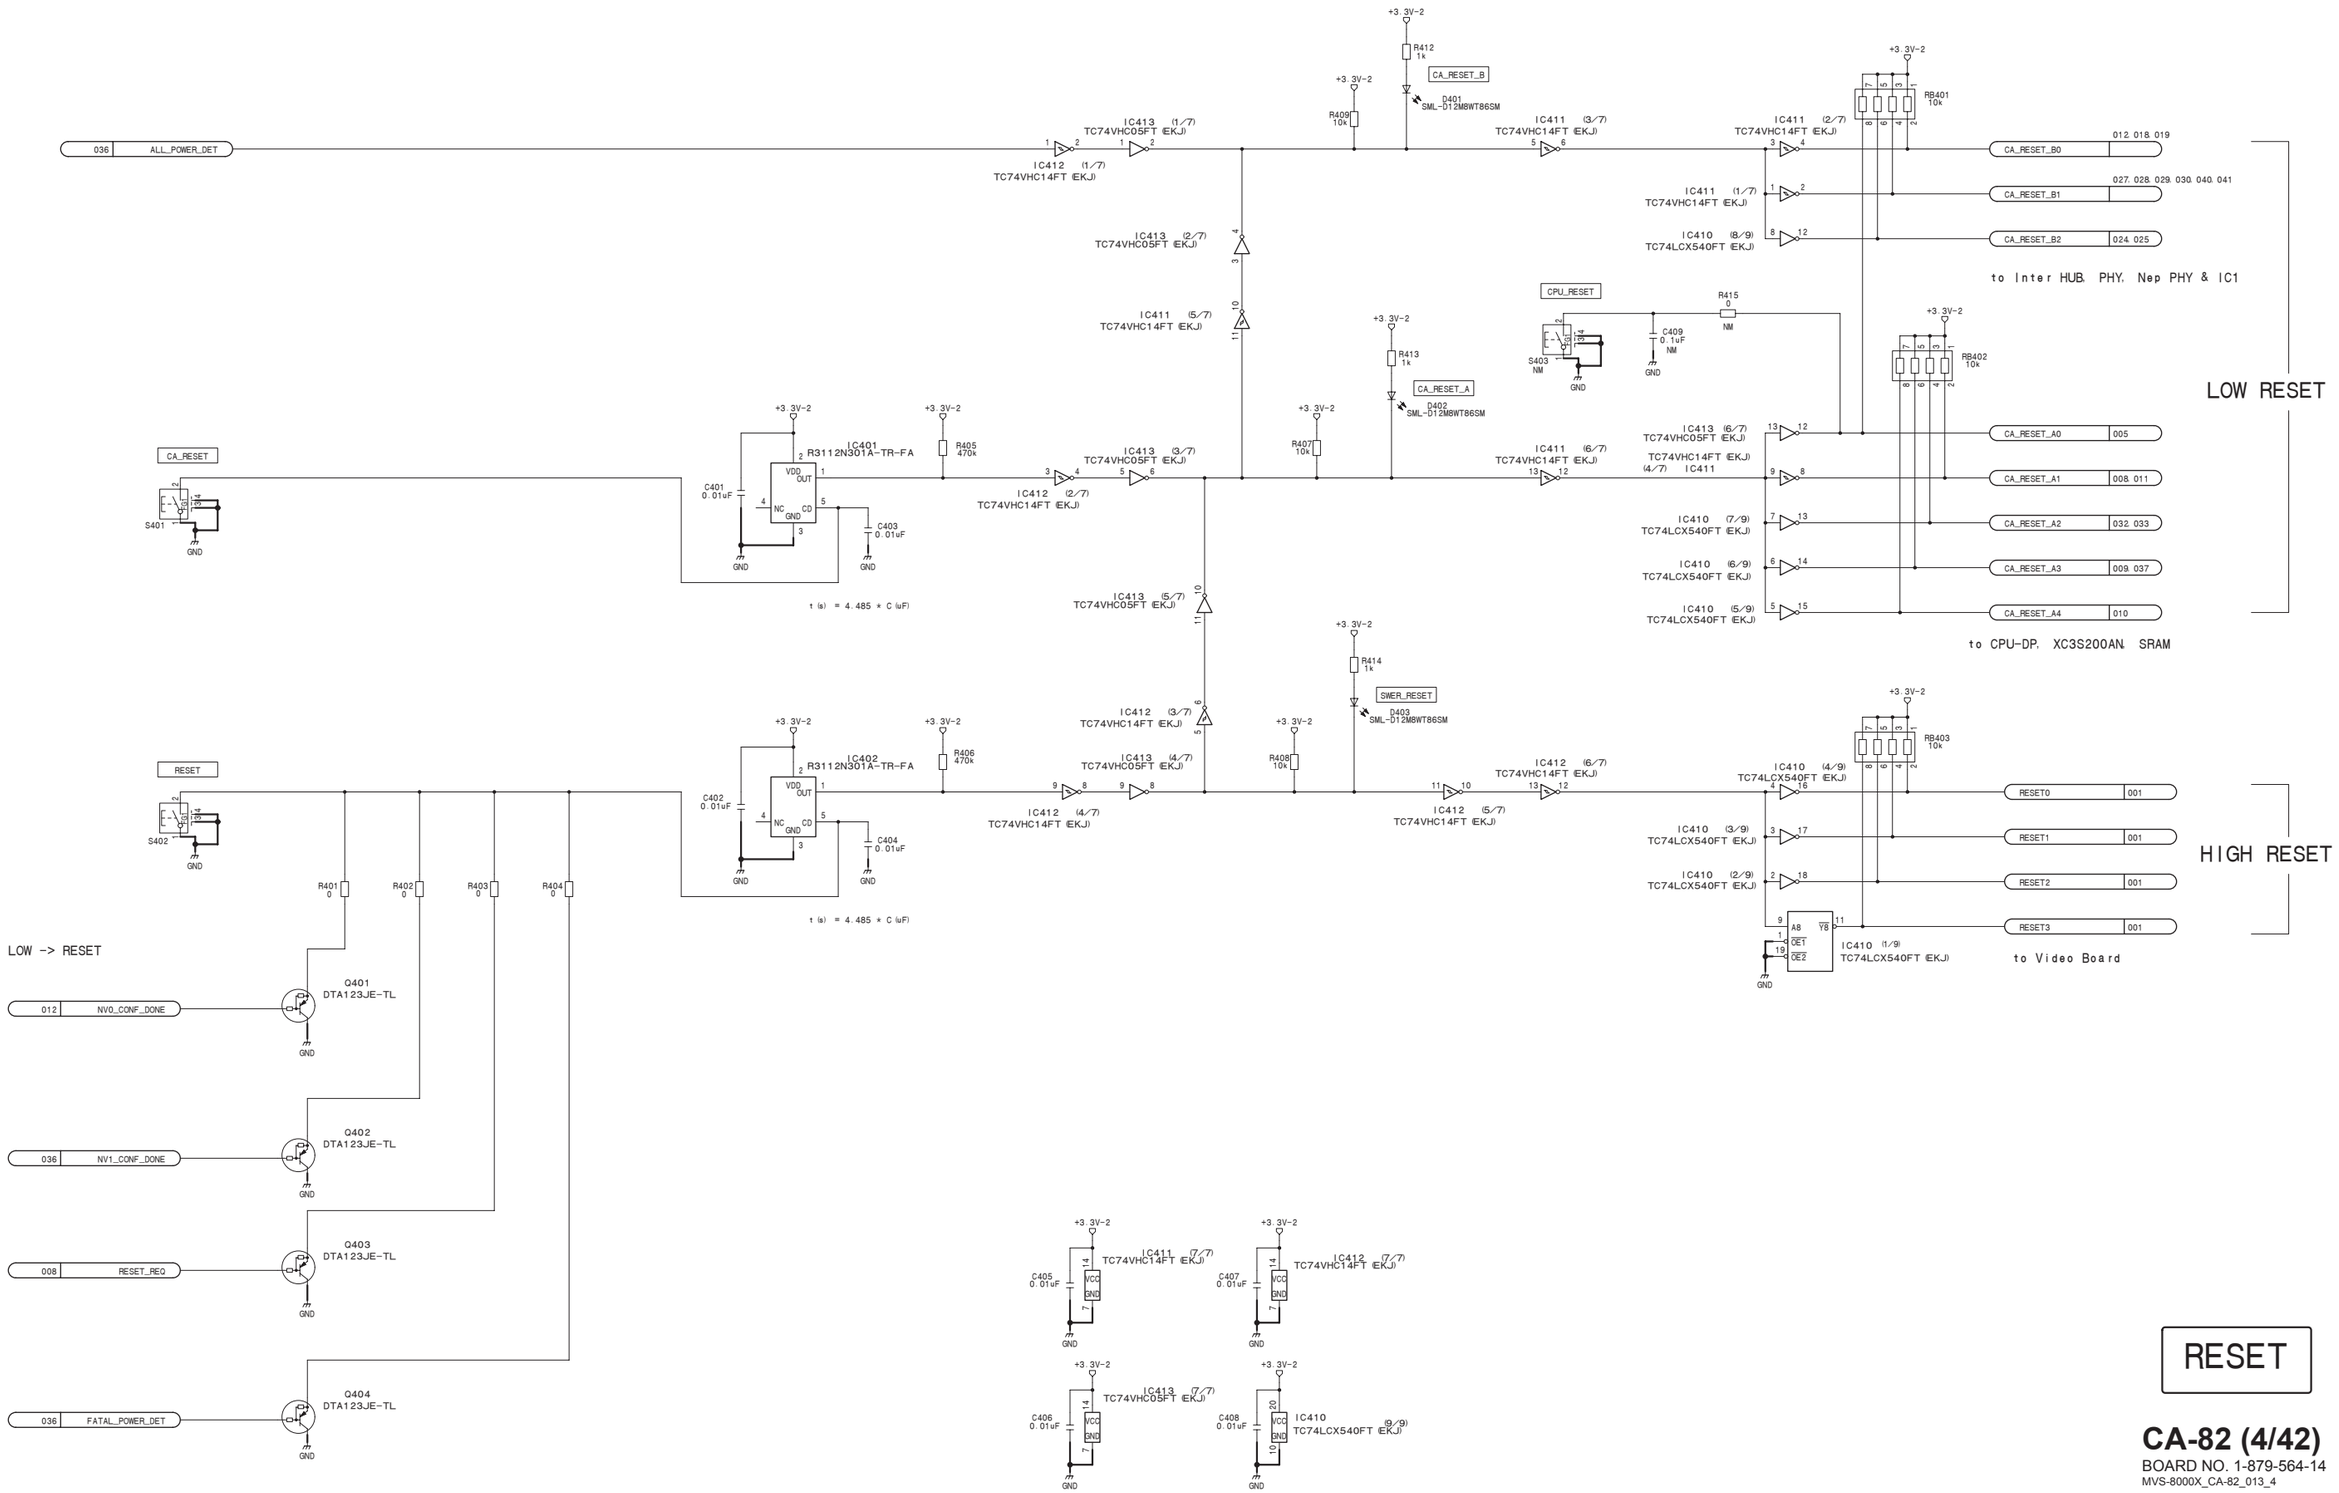

4-6 (a) 4-6 (a)

RESET

CA-82 (4/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_4

MVS-8000X/7000X

A	B	C	D	E	F	G	H

CA-82 (5/42)
SUFFIX: -14

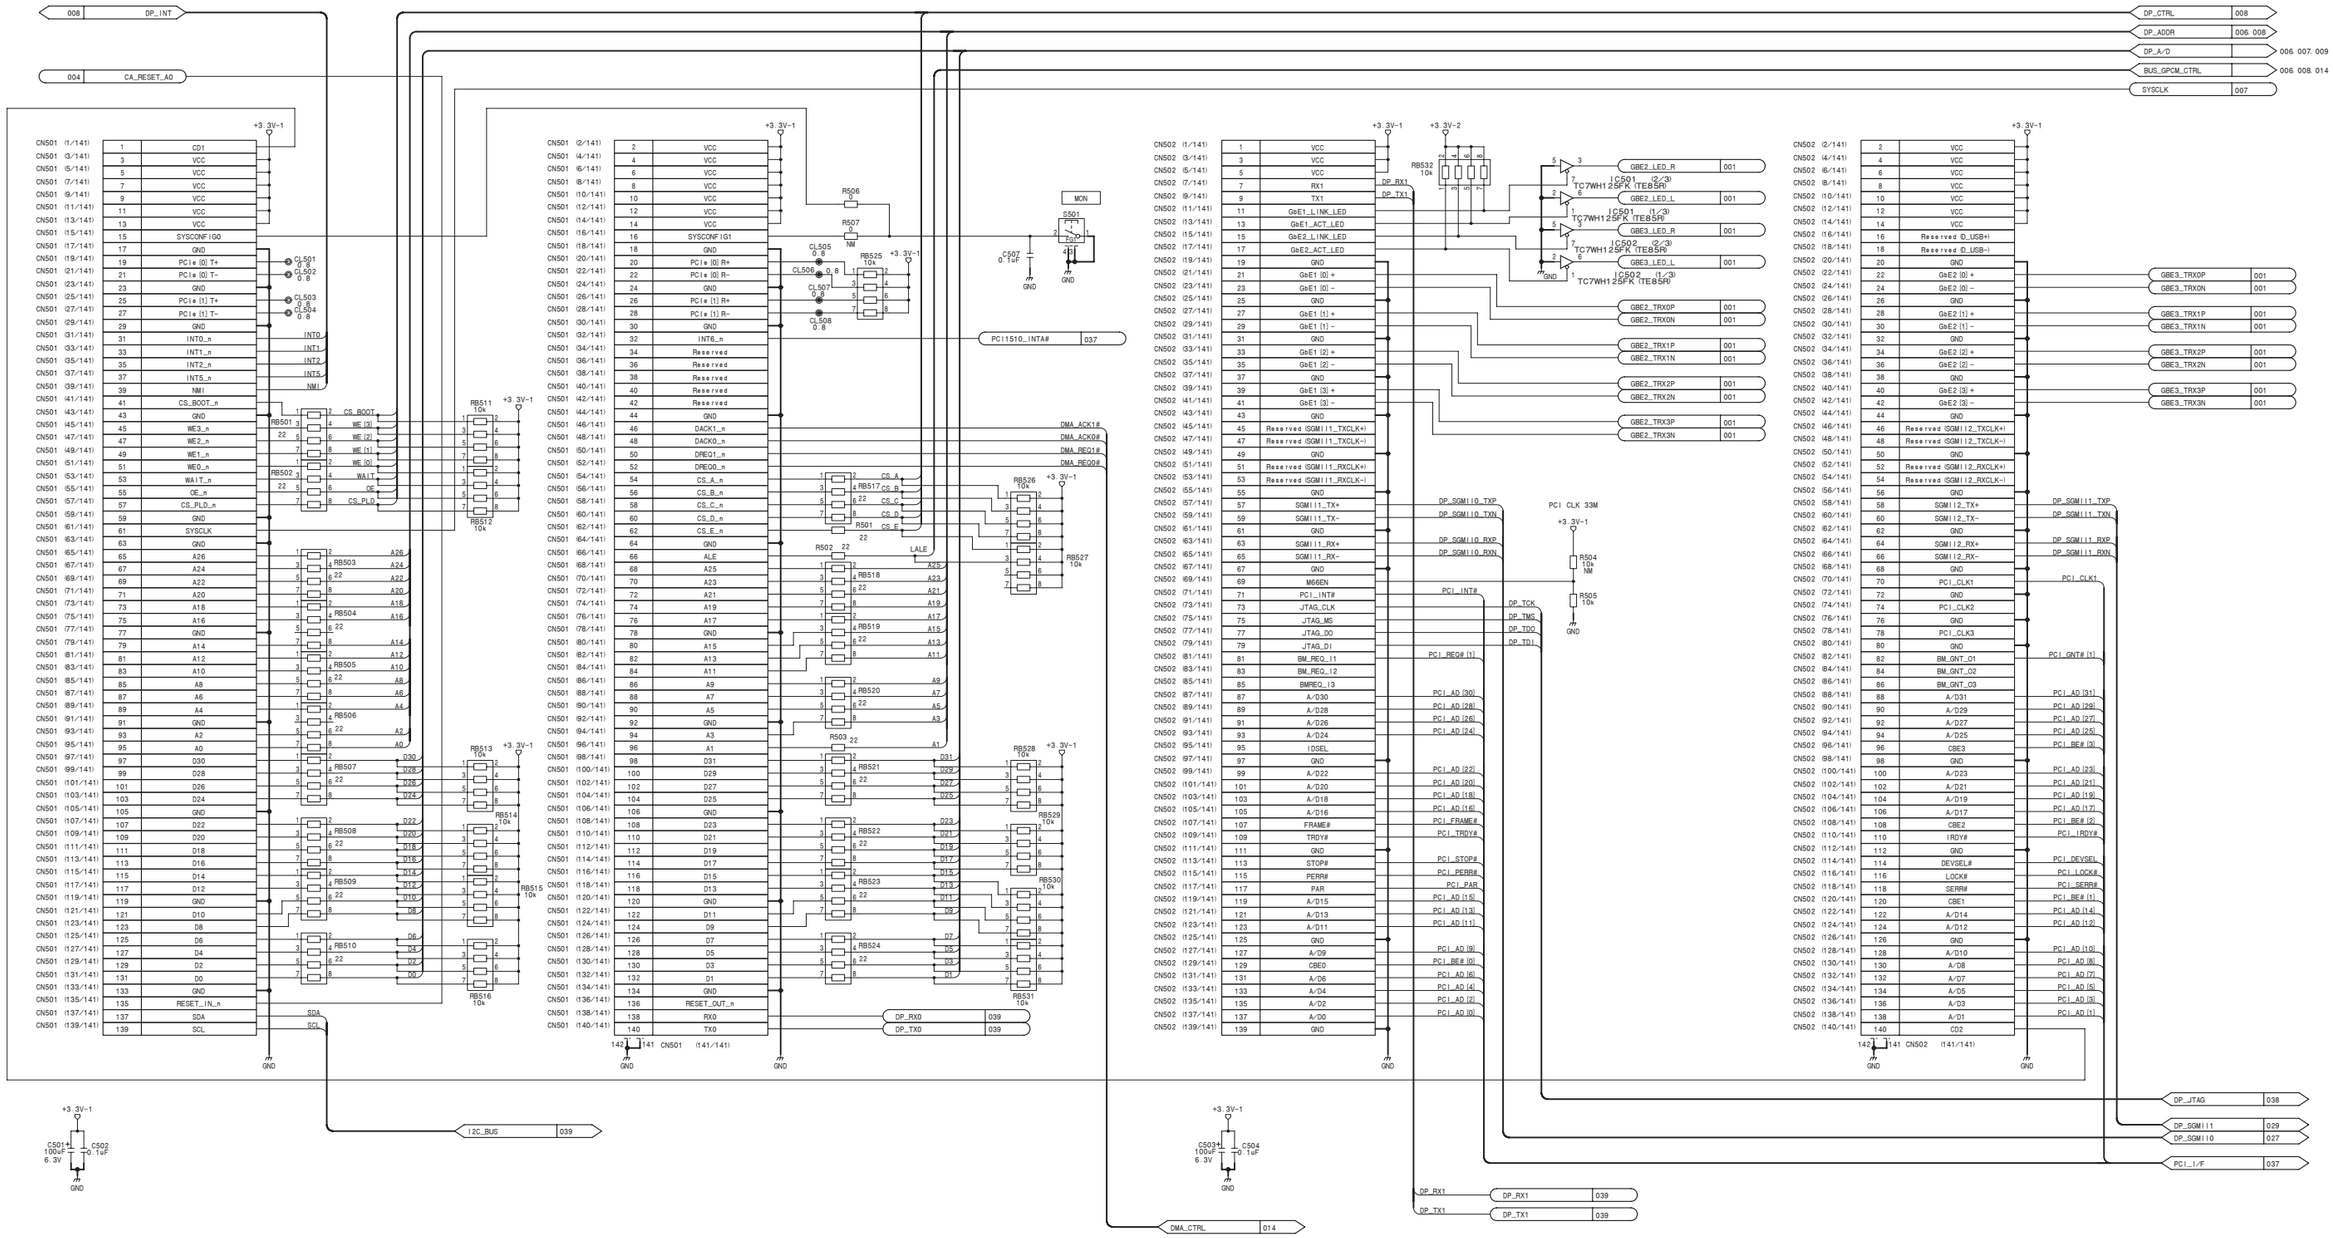

CPU-DP CONNECTOR

CA-82 (5/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_5

CA-82 (6/42)
SUFFIX: -14

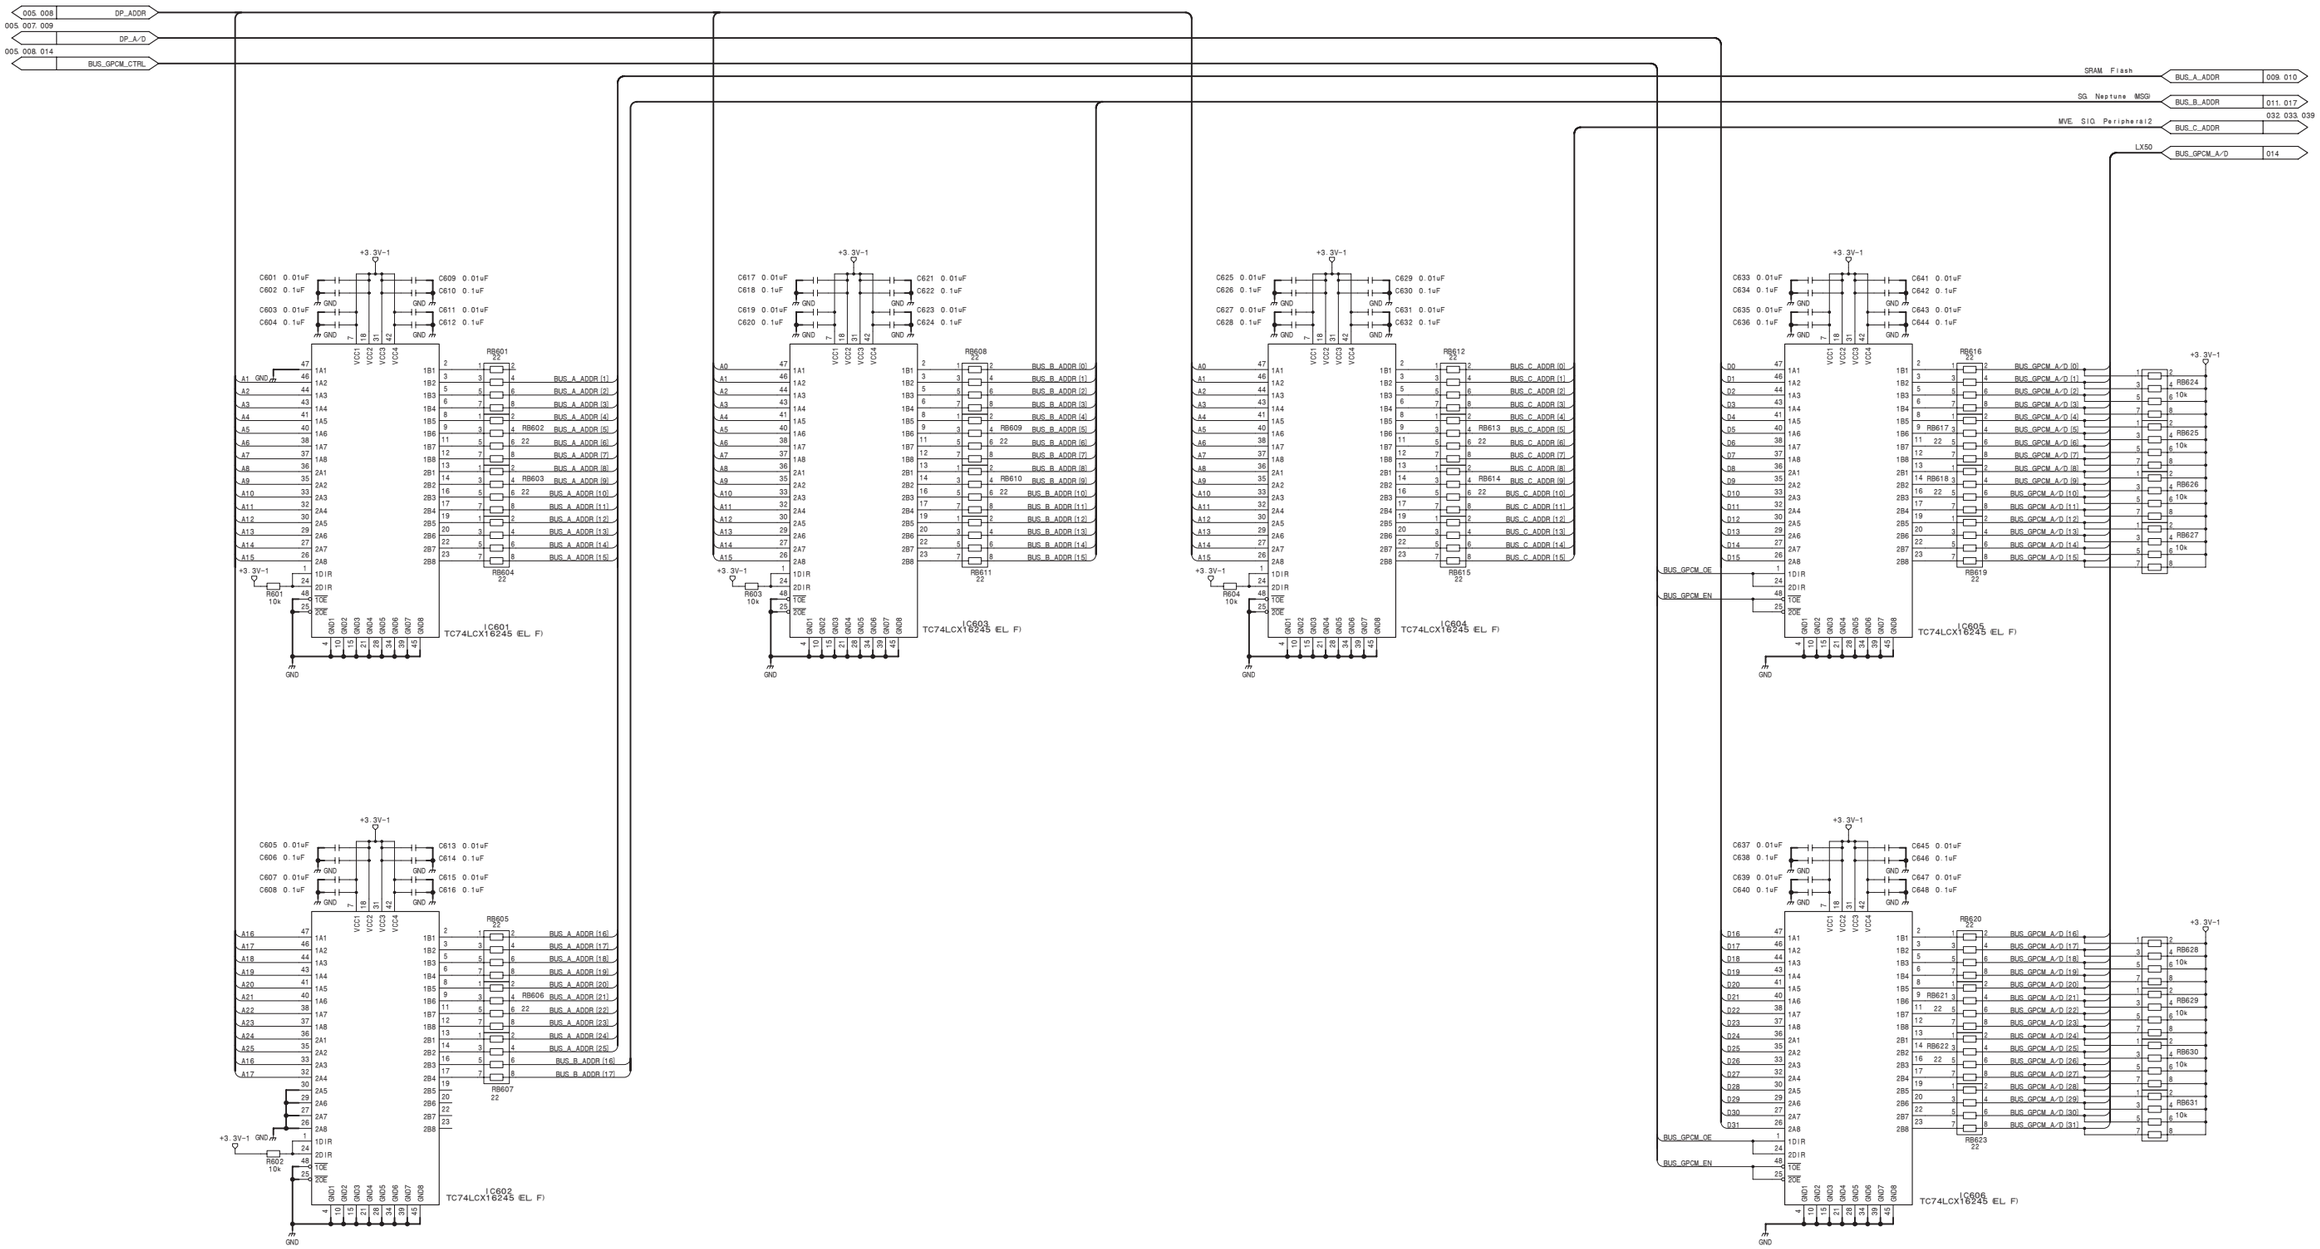

BUS BUFFER 1/2

CA-82 (6/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_6

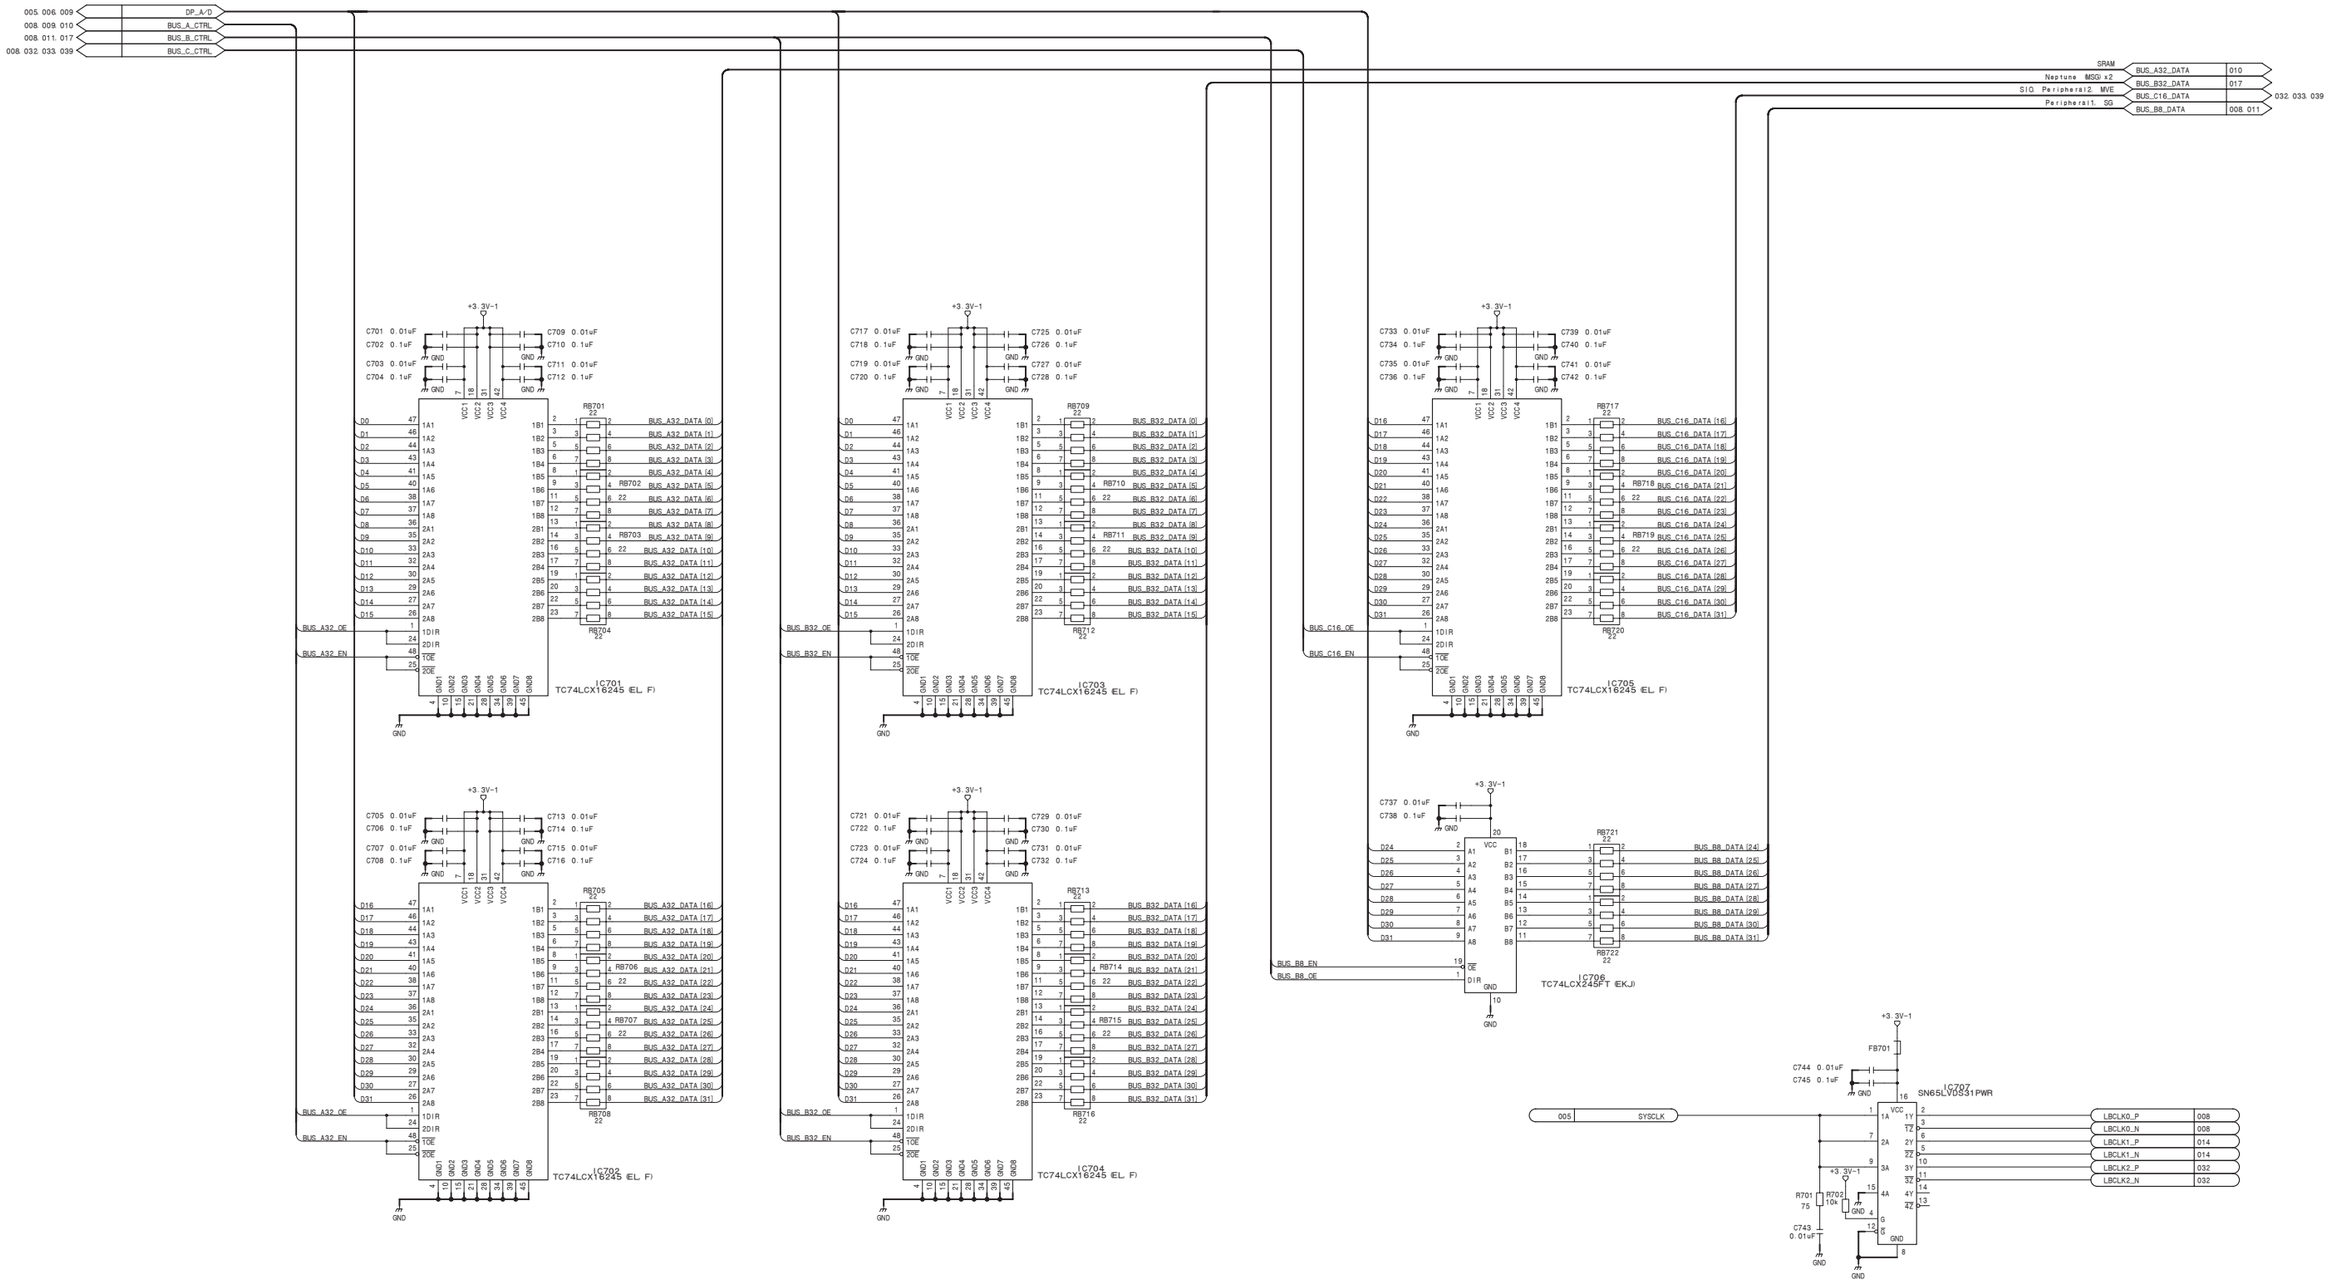

BUS BUFFER 2/2

CA-82 (7/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_7

CA-82 (8/42) **SUFFIX: -14**

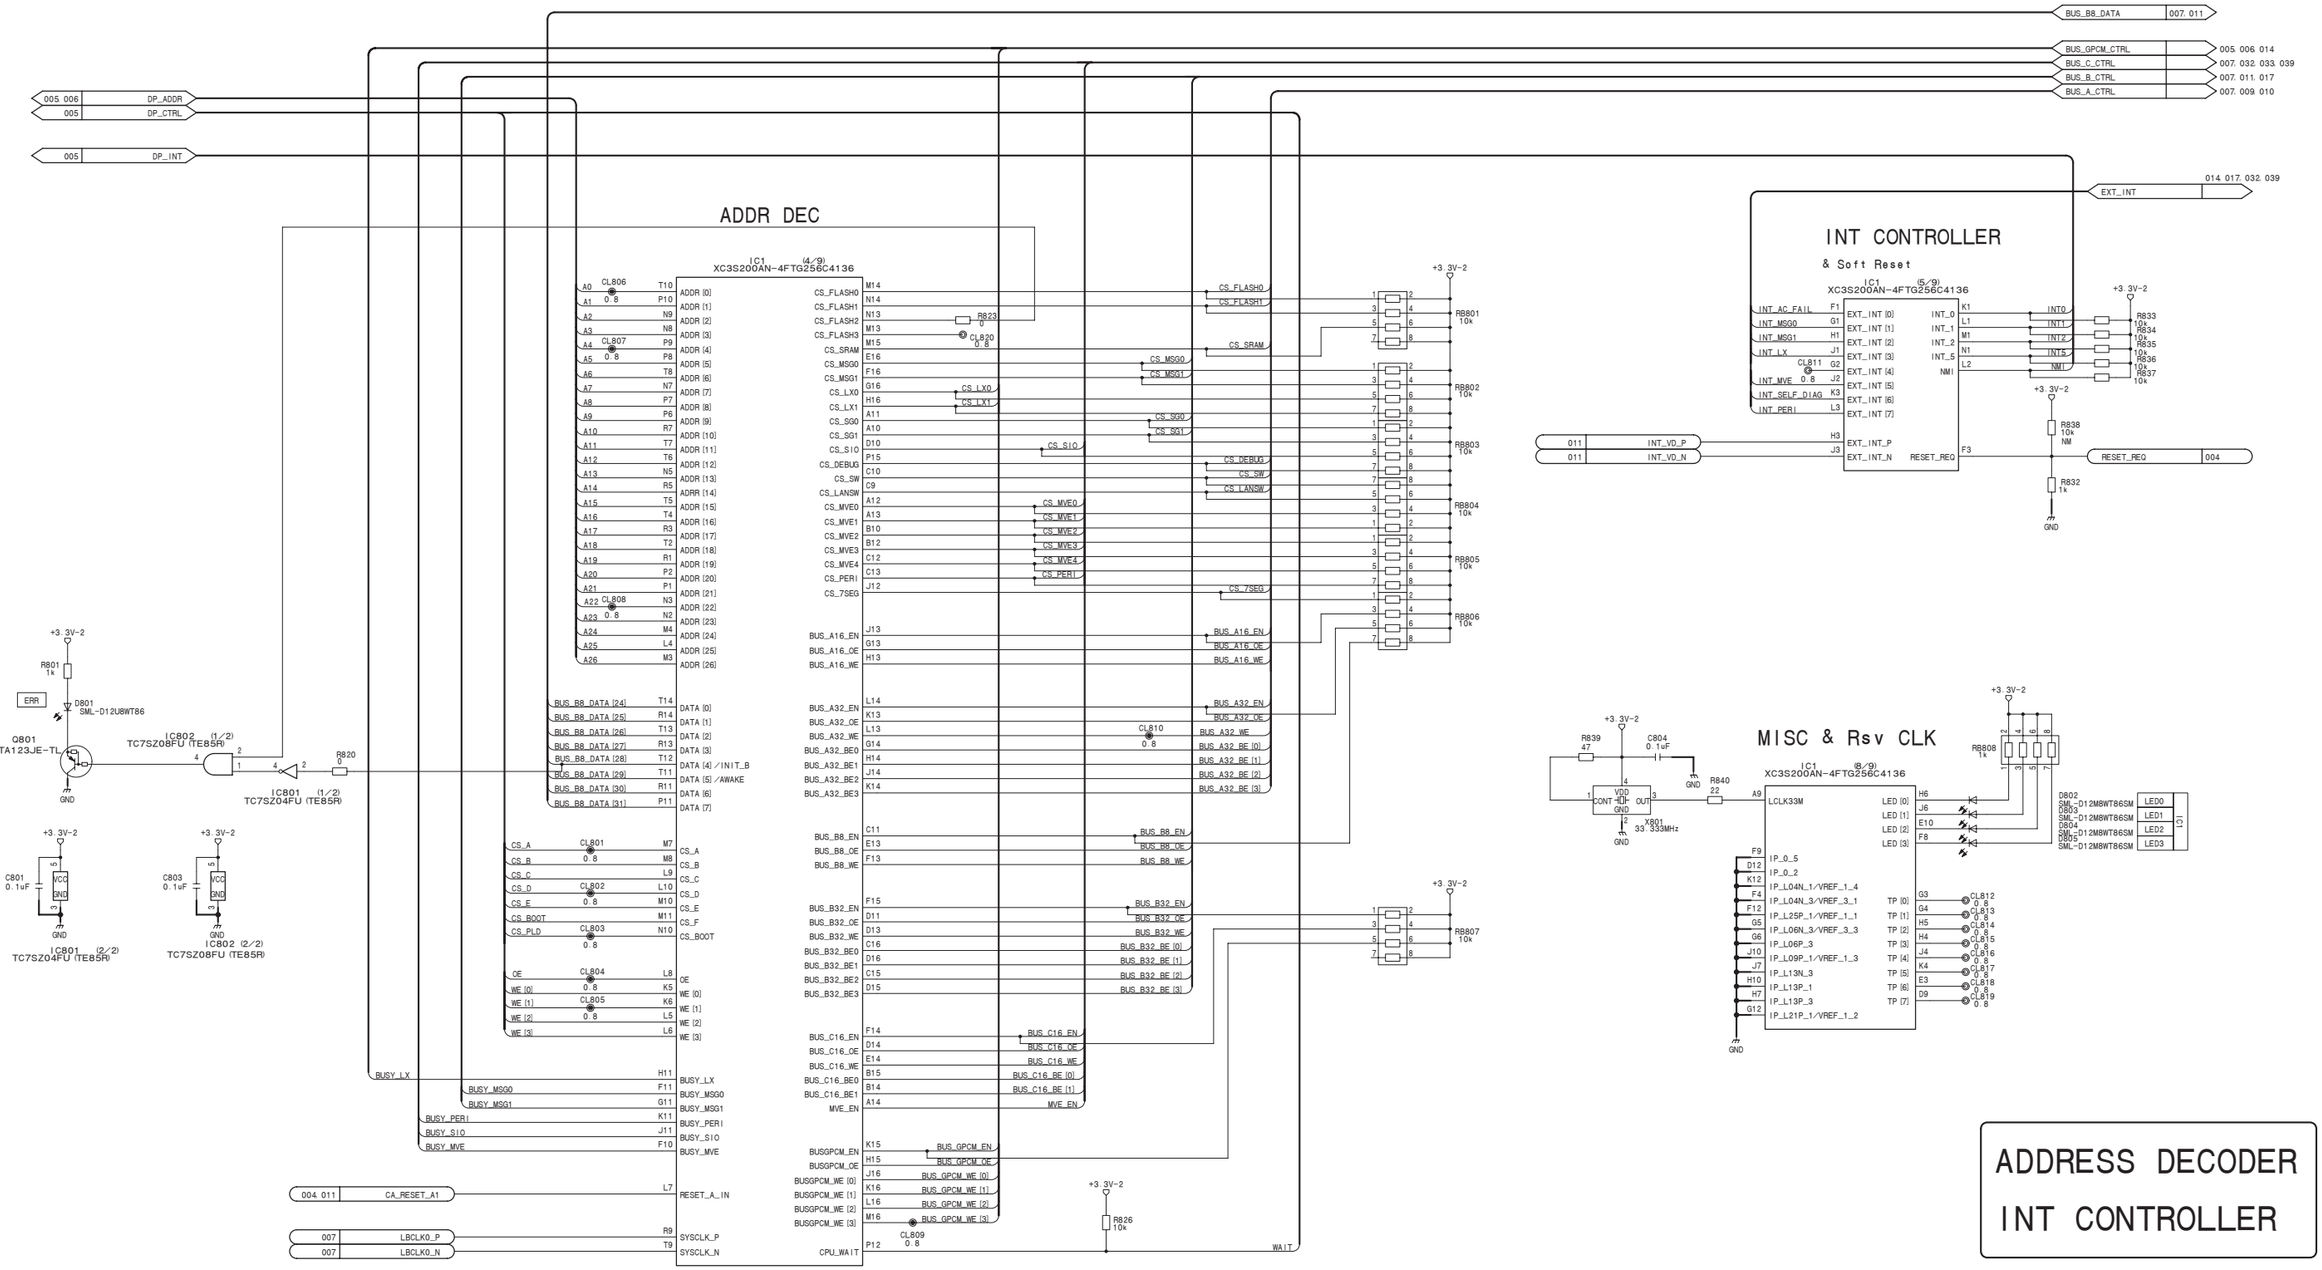

ADDRESS DECODER
INT CONTROLLER

CA-82 (8/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_8

CA-82 (9/42)
SUFFIX: -14

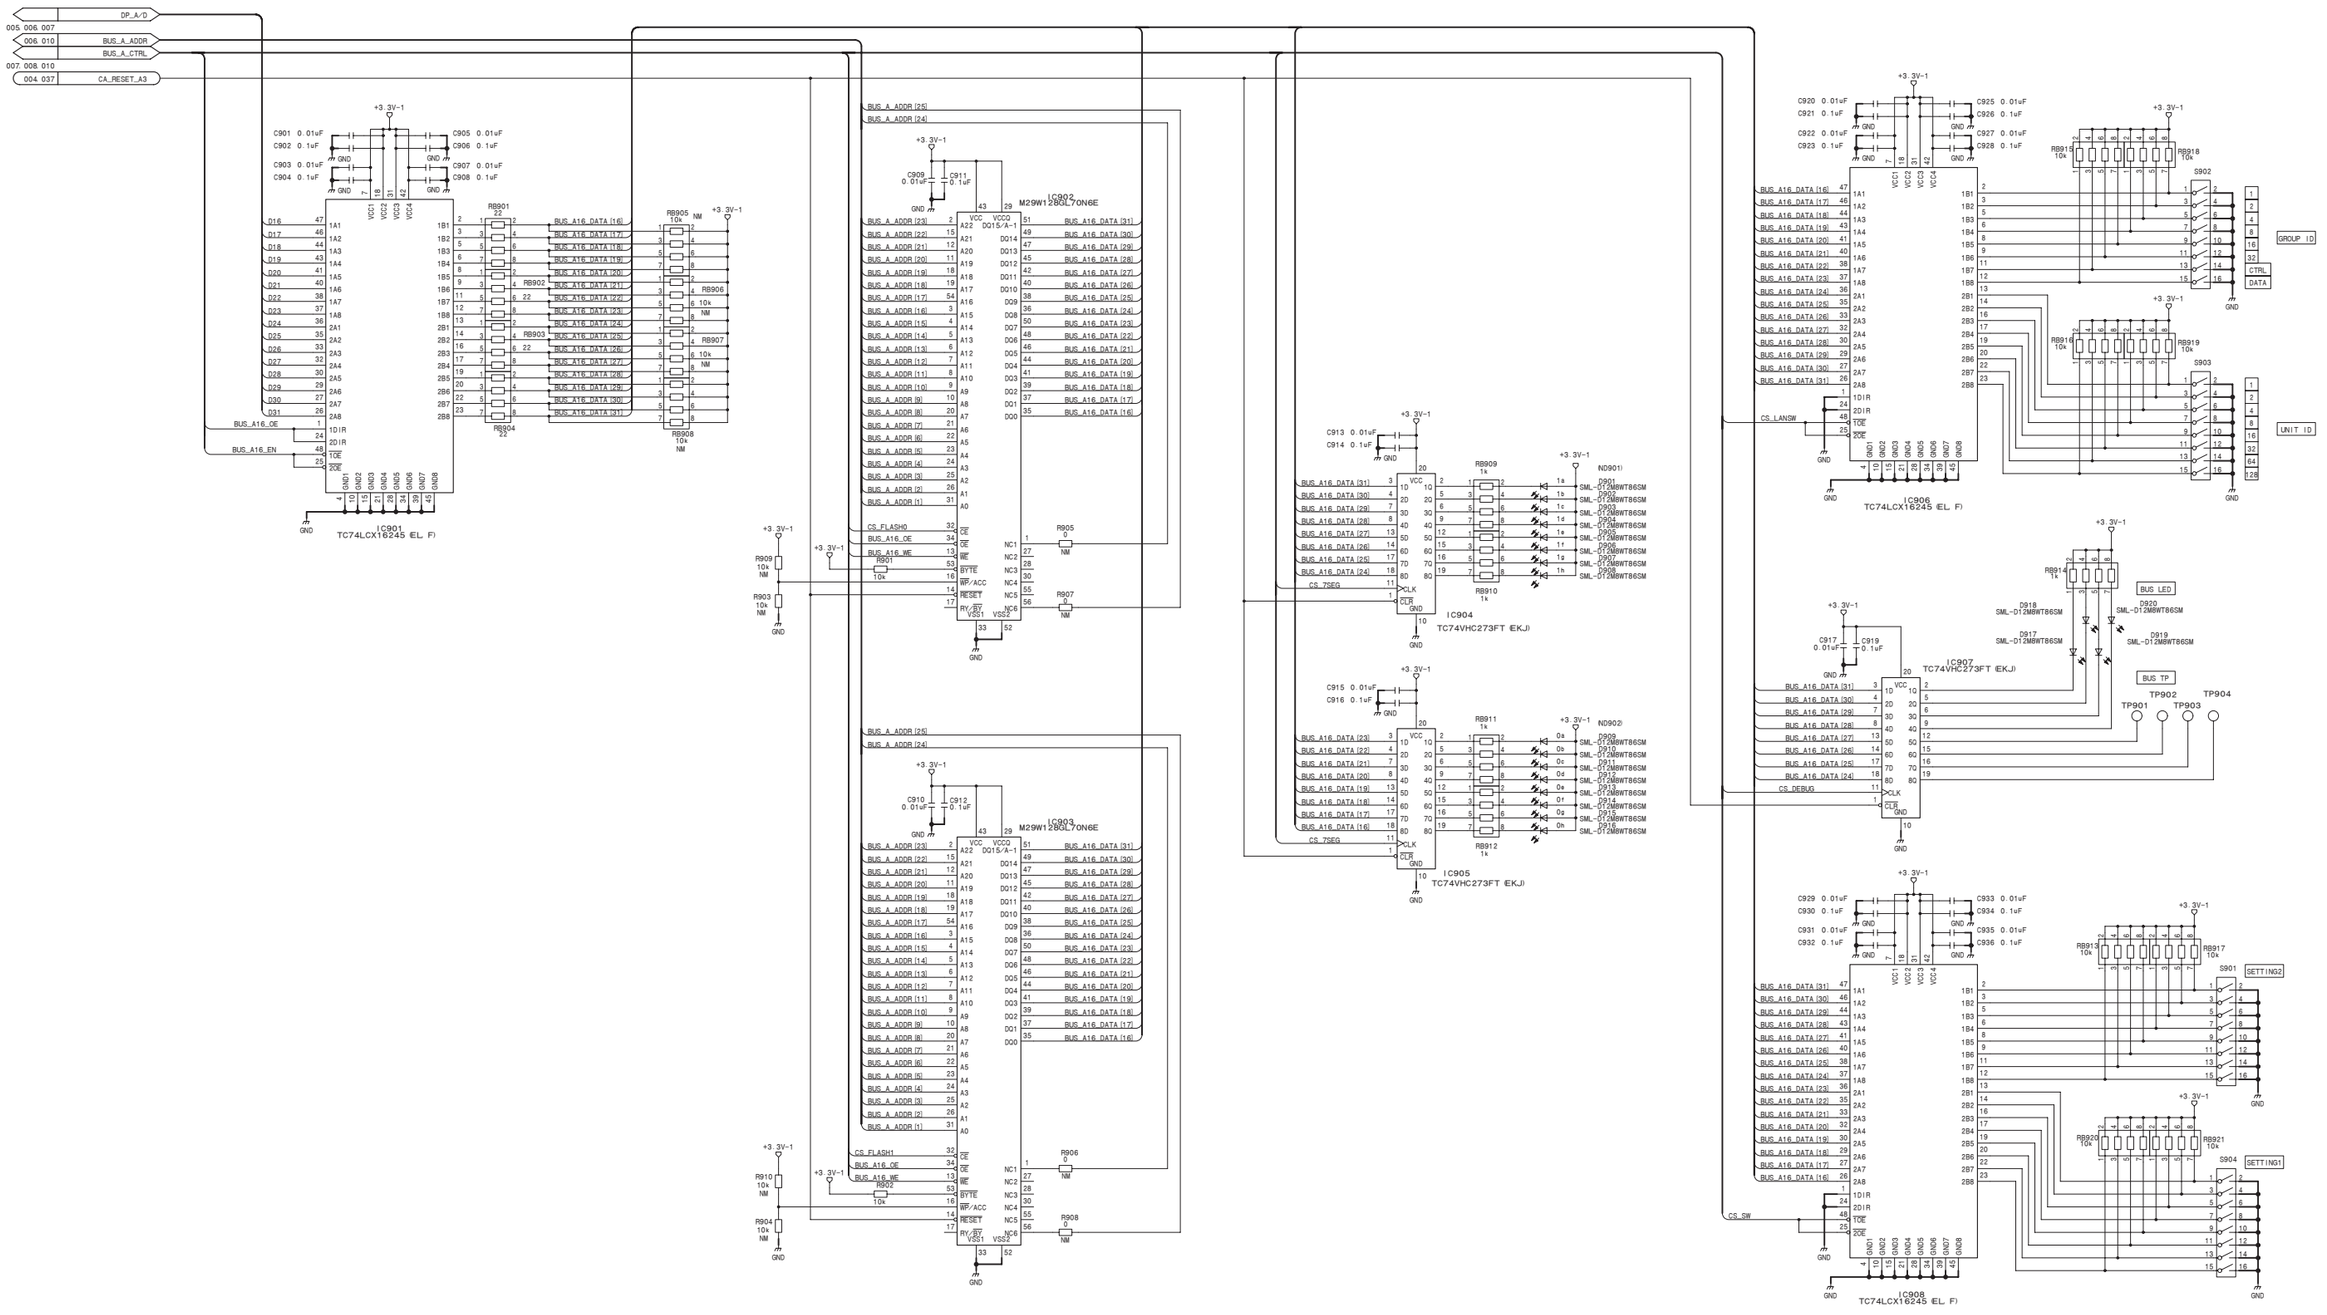

Flash & DEBUG

CA-82 (9/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_9

CA-82 (10/42)
SUFFIX: -14

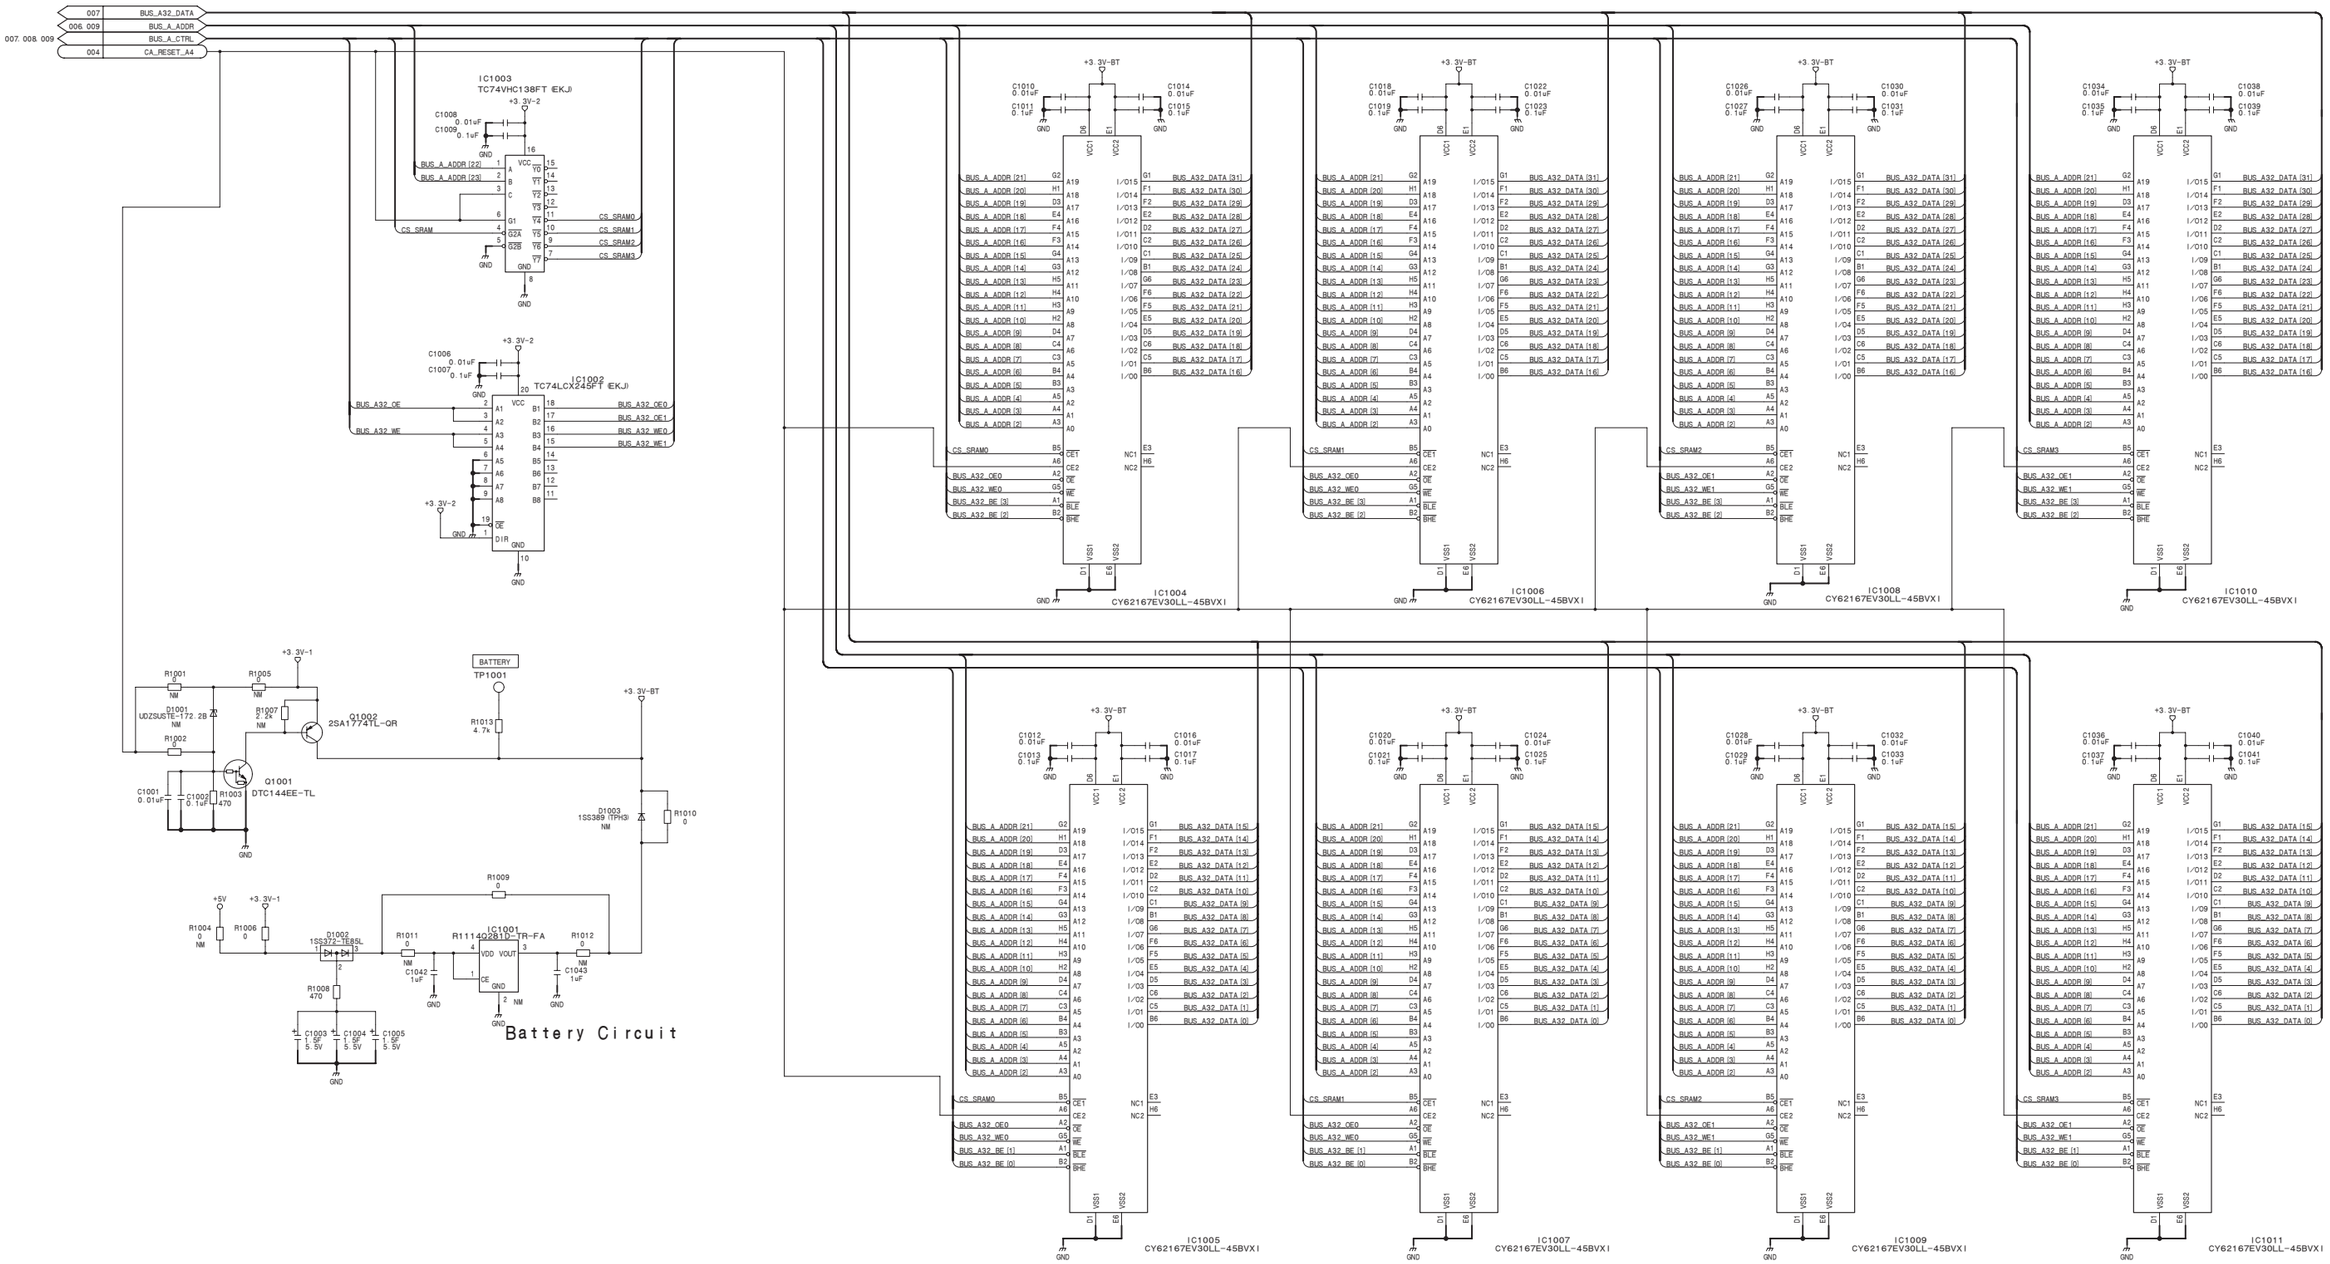

CA-82 (10/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_10

CA-82 (11/42)
SUFFIX: -14

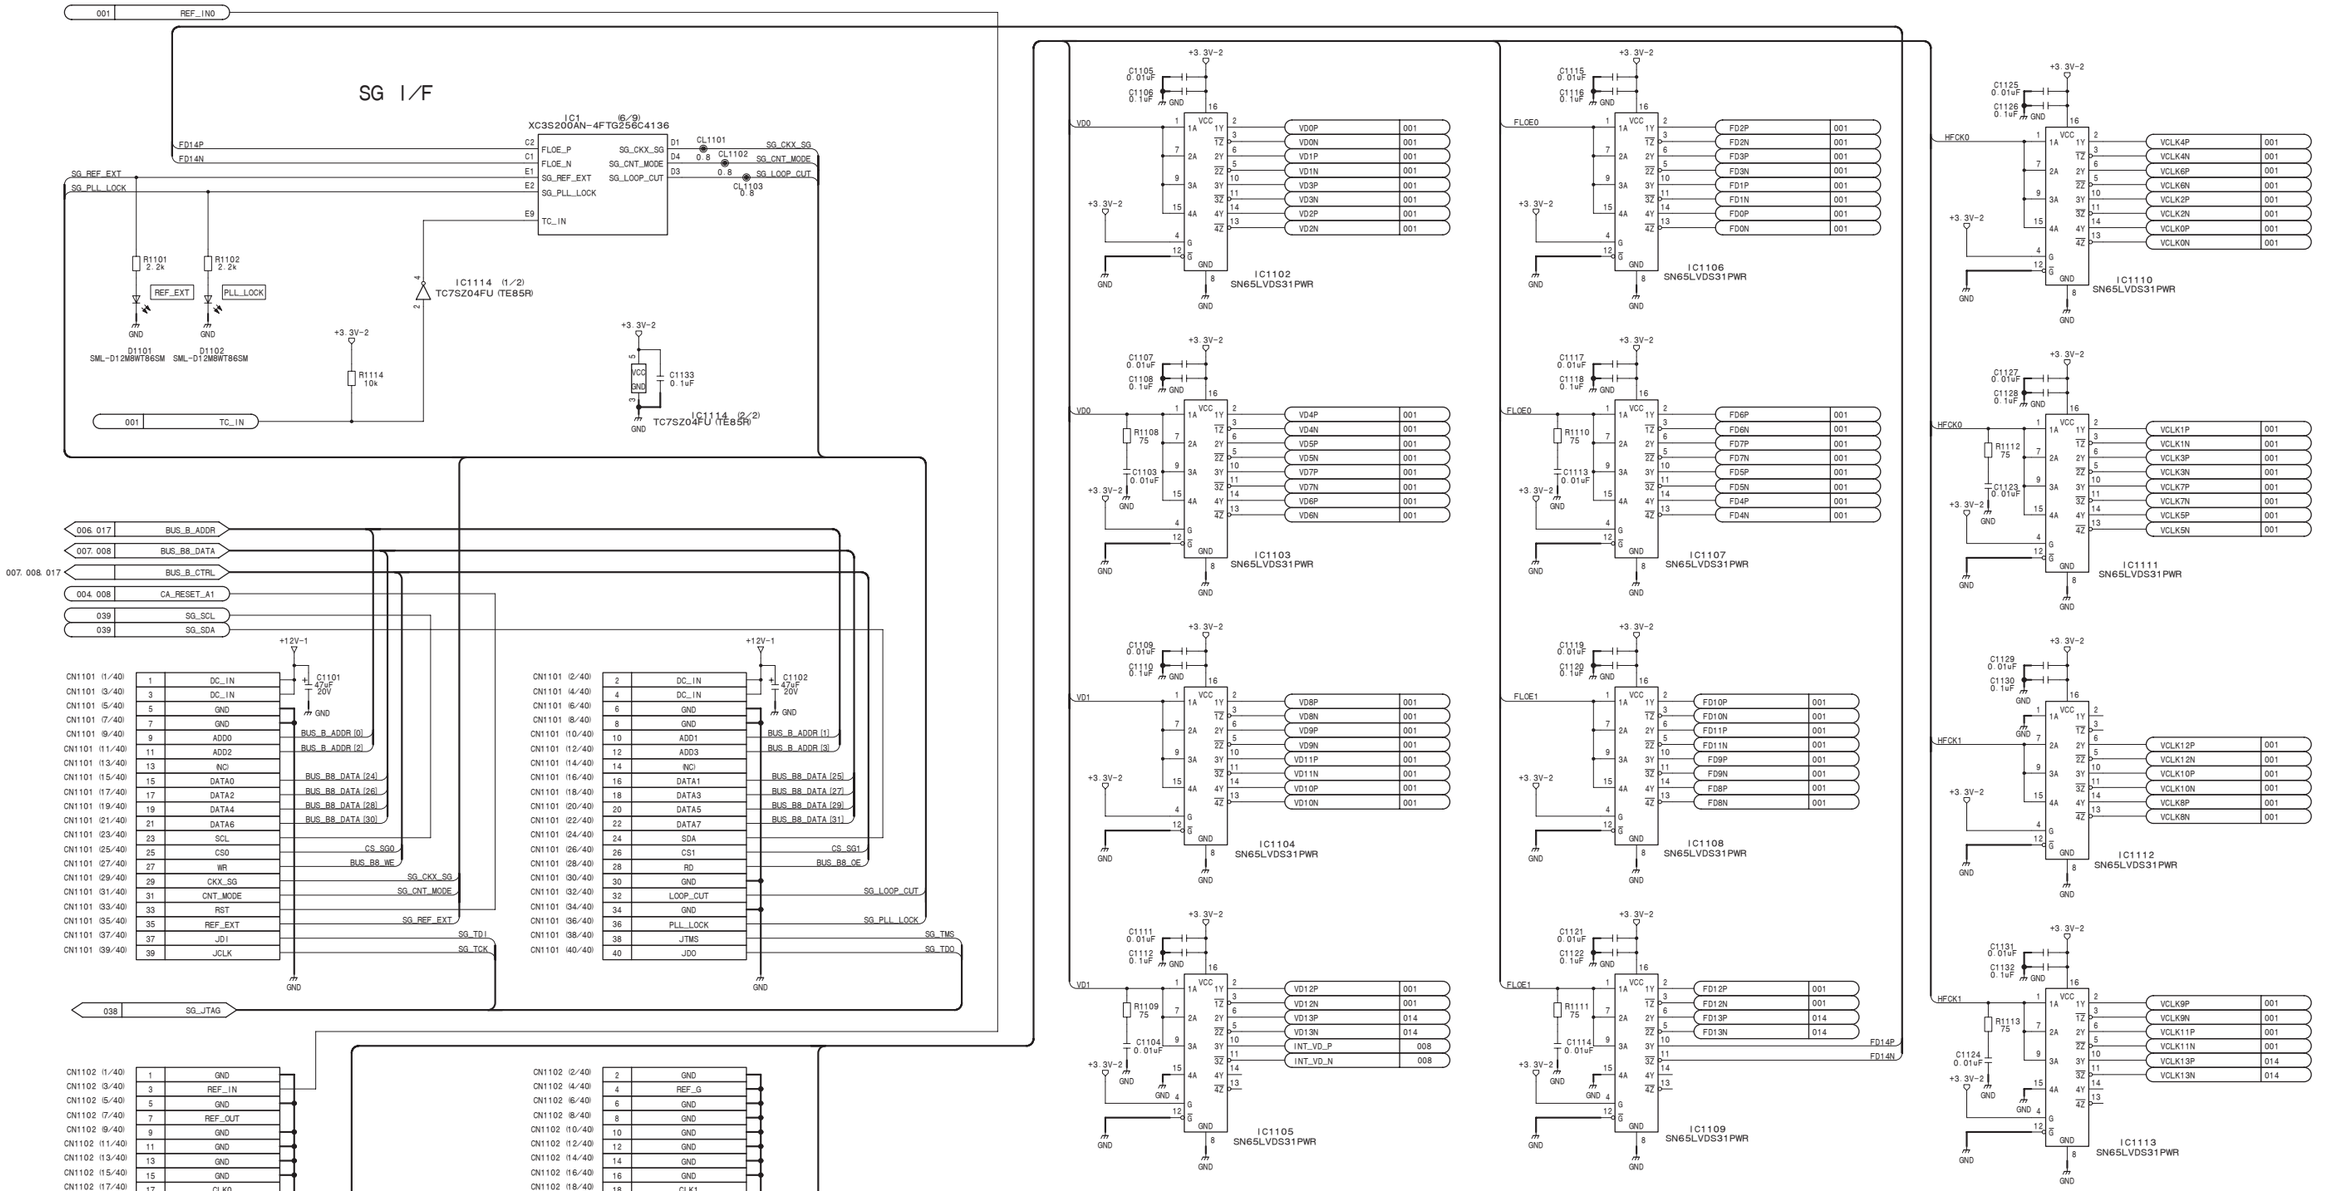

SG I/F

CA-82 (11/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_11

CA-82 (12/42)
SUFFIX: -14

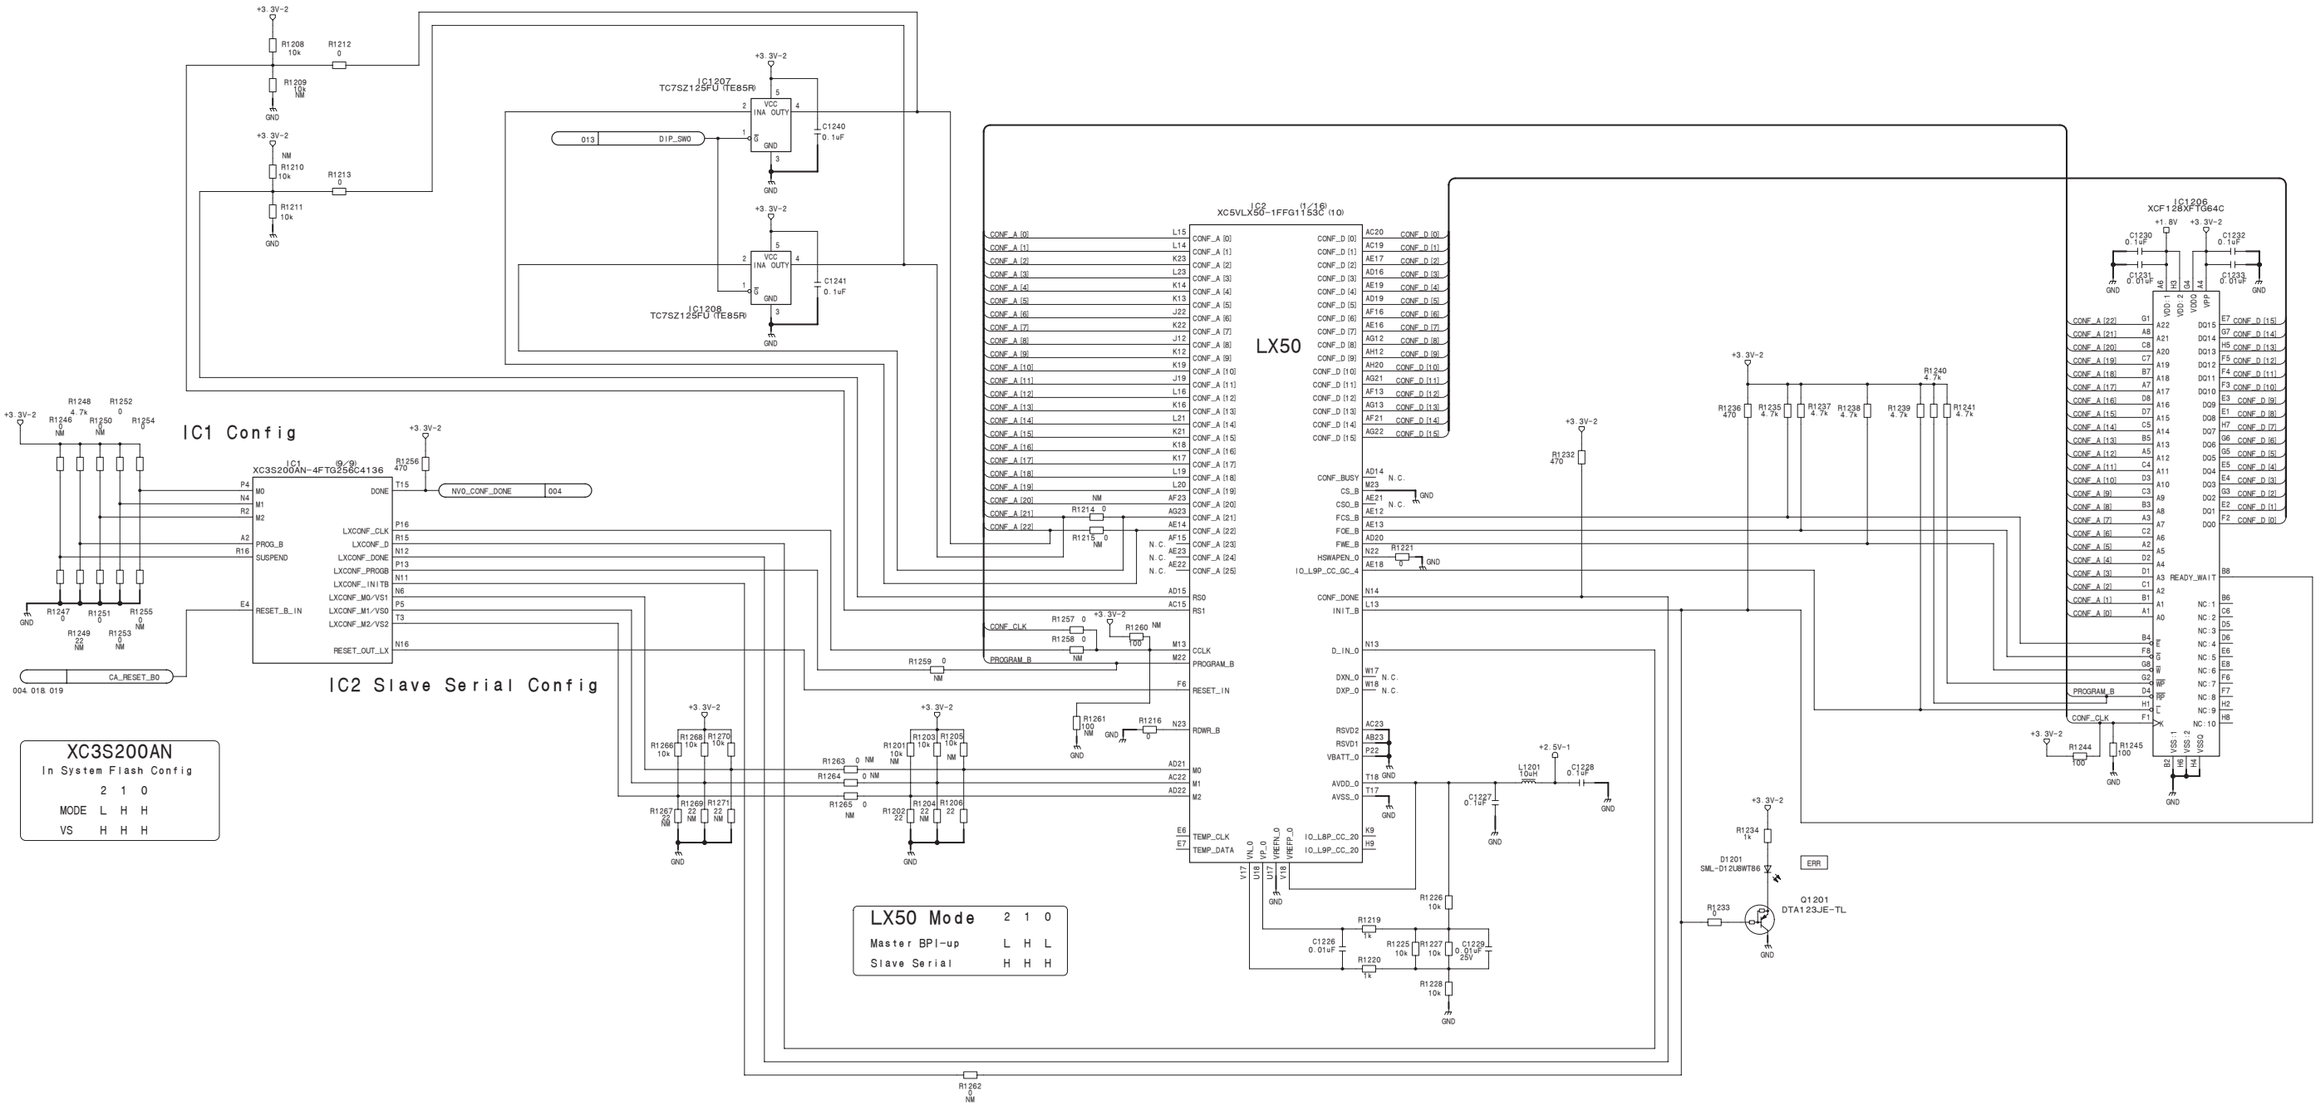

CA-82 (13/42) **SUFFIX: -14**

GND

IC2 (2/16) XC5VLX50-1FFG1153C (10)

VCCINT

IC2 (4/16) XC5VLX50-1FFG1153C (10)

VCCAUX

IC2 (3/16) XC5VLX50-1FFG1153C (10)

VCCIO

IC2 (5/16) XC5VLX50-1FFG1153C (10)

MISC & CLK

IC2 (13/16) XC5VLX50-1FFG1153C (10)

Neptune & PHY Modified Clock

LX50 (2/5)
VCC & GND & MISC

CA-82 (13/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_13

4-15 (a)

CA-82 (14/42)
SUFFIX: -14

Timing Packet I/F

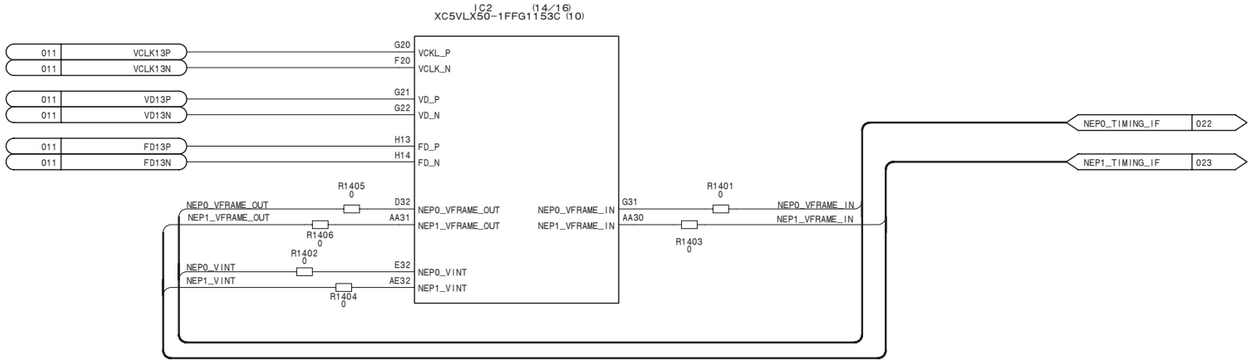

Local BUS I/F

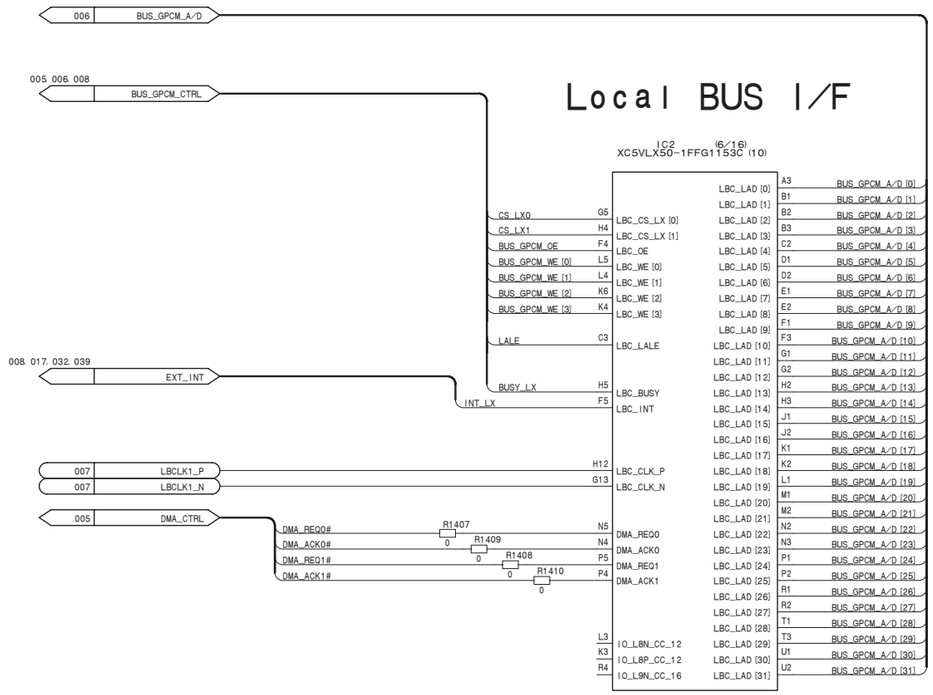

LX50 (3/5)
GPCM I/F & Timing Pkt I/F

CA-82 (14/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_14

CA-82 (15/42)
SUFFIX: -14

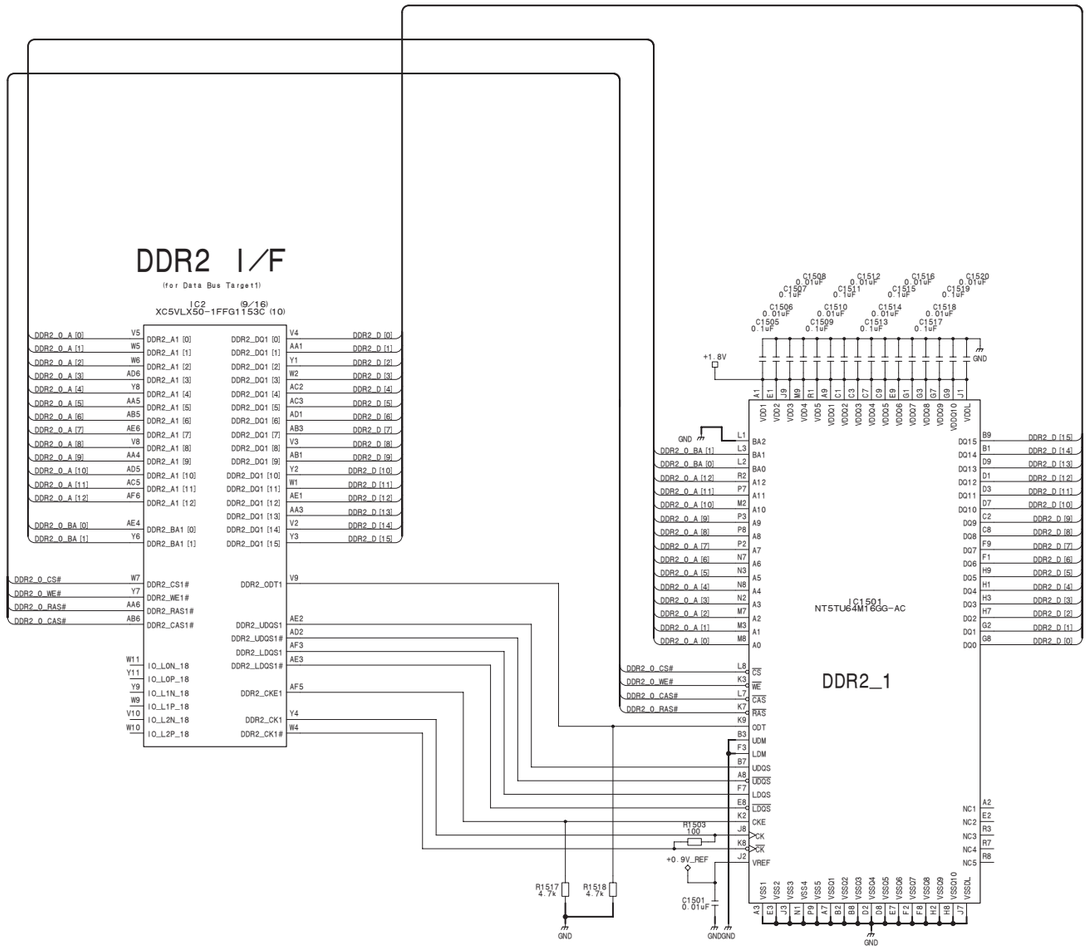

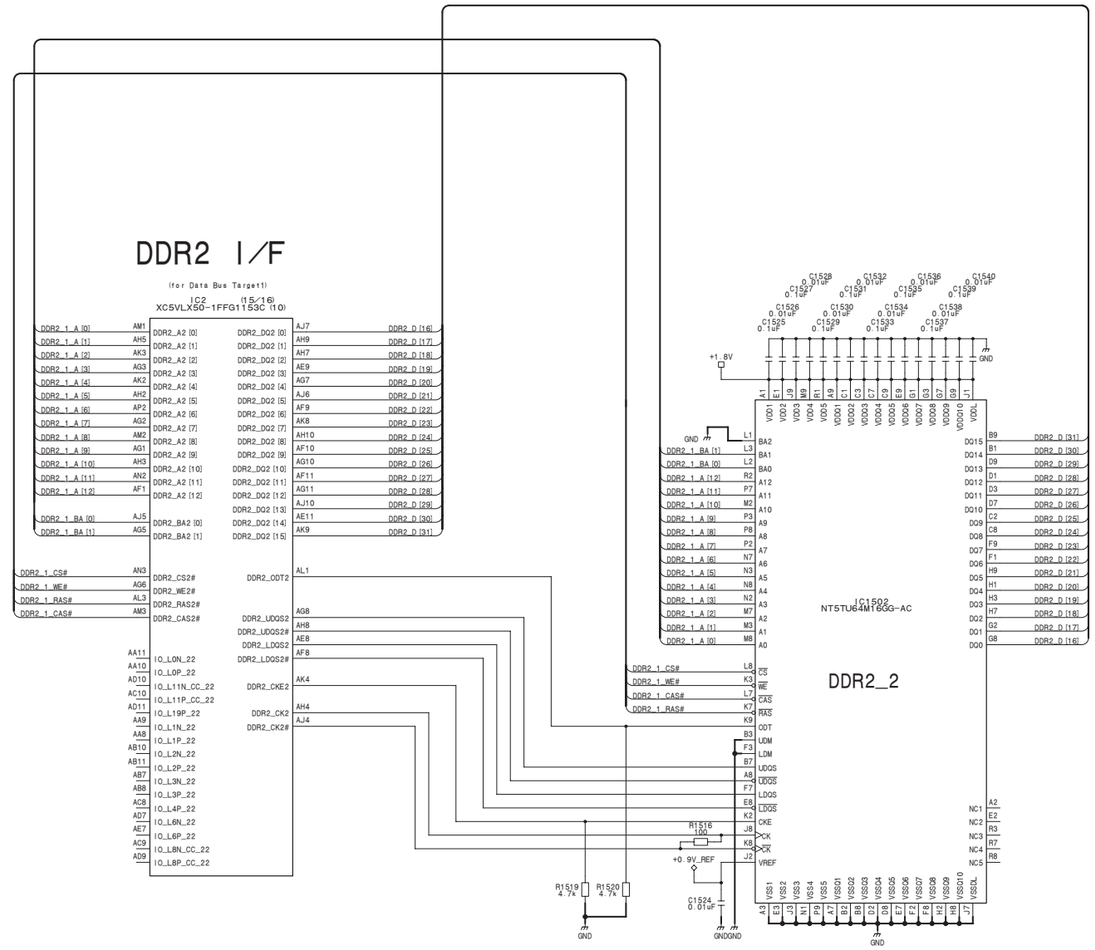

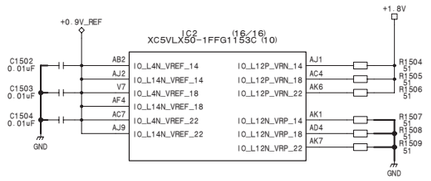



LX50 (4/5)
DDR2 I/F

CA-82 (15/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_15

CA-82 (16/42)
SUFFIX: -14

NOT USED

IC2 (12/16)
XC5VLX50-1FFG1153C (10)

AA25	IO_L0P_21	IO_L13P_20	K7
AA26	IO_L0N_21	IO_L0P_20	K11
AA28	IO_L5N_21	IO_L14N_VREF_19	K26
AA29	IO_L11P_CC_17	IO_L14P_19	K27
AB25	IO_L3P_21	IO_L13P_19	K28
AB26	IO_L3N_21	IO_L4P_15	K29
AC24	IO_L17N_21	IO_L11N_CC_SM14N_11	K32
AC25	IO_L17P_21	IO_L4P_16	L6
AC27	IO_L1N_21	IO_L8N_CC_20	L9
AD24	IO_L19P_21	IO_L4P_20	L11
AD25	IO_L18N_21	IO_L0N_19	L24
AD29	IO_L15N_17	IO_L1P_19	L25
AD30	IO_L13P_17	IO_L4N_VREF_15	L29
AD31	IO_L12P_VRN_17	IO_L7P_15	L30
AE24	IO_L19N_21	IO_L13P_12	M3
AF14	IO_L5N_GC_4	IO_L6P_16	M5
AF18	IO_L9N_CC_GC_4	IO_L4N_VREF_16	M6
AF19	IO_L8N_CC_GC_4	IO_L15N_20	M7
AF20	IO_L8P_CC_GC_4	IO_L6P_20	M11
AF24	IO_L13P_21	IO_L12N_VRP_19	M27
AF25	IO_L15P_21	IO_L15P_19	M28
AG16	IO_L7N_GC_VRP_4	IO_L16N_20	N7
AG17	IO_L7P_GC_VRN_4	IO_L17P_20	N9
AG25	IO_L13N_21	IO_L18N_19	N25
AG26	IO_L14N_VREF_21	IO_L12P_VRN_19	N27
AG30	IO_L19N_17	IO_L15N_19	N28
AG31	IO_L14N_VREF_17	IO_L11N_CC_16	P6
AG33	IO_L12P_VRN_13	IO_L16P_20	P7
AH19	IO_L6P_GC_4	IO_L18P_20	P9
AH25	IO_L12N_VRP_21	IO_L19P_20	P11
AH27	IO_L11P_CC_21	IO_L18P_19	P25
AJ19	IO_L4N_GC_VREF_4	IO_L16P_19	P26
AJ25	IO_L12P_VRN_21	IO_L16N_19	P27
AK19	IO_L4P_GC_4	IO_L15P_SM13P_11	P32
E3	IO_L4P_12	IO_L14N_VREF_12	R3
E4	IO_L3P_16	IO_L14P_16	R6
F8	IO_L7N_20	IO_L12N_VRP_16	R8
G3	IO_L6P_12	IO_L12P_VRN_16	R9
G7	IO_L14N_VREF_20	IO_L17P_16	R11
G25	IO_L5P_19	IO_L17P_15	R26
G26	IO_L5N_19	IO_L12P_VRN_15	R28
G30	IO_L1P_15	IO_L12N_VRP_15	R29
H7	IO_L12P_VRN_20	IO_L13N_15	R31
H15	IO_L4N_GC_VREF_3	IO_L10N_CC_16	T4
H18	IO_L0P_CC_GC_3	IO_L13N_16	T5
H19	IO_L1P_CC_GC_3	IO_L17N_16	T10
H20	IO_L1N_CC_GC_3	IO_L19N_16	T11
H23	IO_L9N_GC_3	IO_L19N_15	T25
J4	IO_L5N_16	IO_L18N_15	T26
J5	IO_L2P_16	IO_L19P_12	U3
J6	IO_L0P_16	IO_L10P_CC_16	U5
J7	IO_L13N_20	IO_L13P_16	U6
J9	IO_L2N_20	IO_L19P_15	U25
J11	IO_L0N_20	IO_L18P_15	U26
J15	IO_L2N_GC_VRP_3	IO_L2P_17	V25
J16	IO_L2P_GC_VRN_3	IO_L5N_17	V27
J17	IO_L0N_CC_GC_3	IO_L5P_17	V28
J21	IO_L3N_GC_3	IO_L4P_17	V30
J26	IO_L4N_VREF_19	IO_L2N_17	W25

NC PIN

IC2 (11/16)
XC5VLX50-1FFG1153C (10)

| | | |

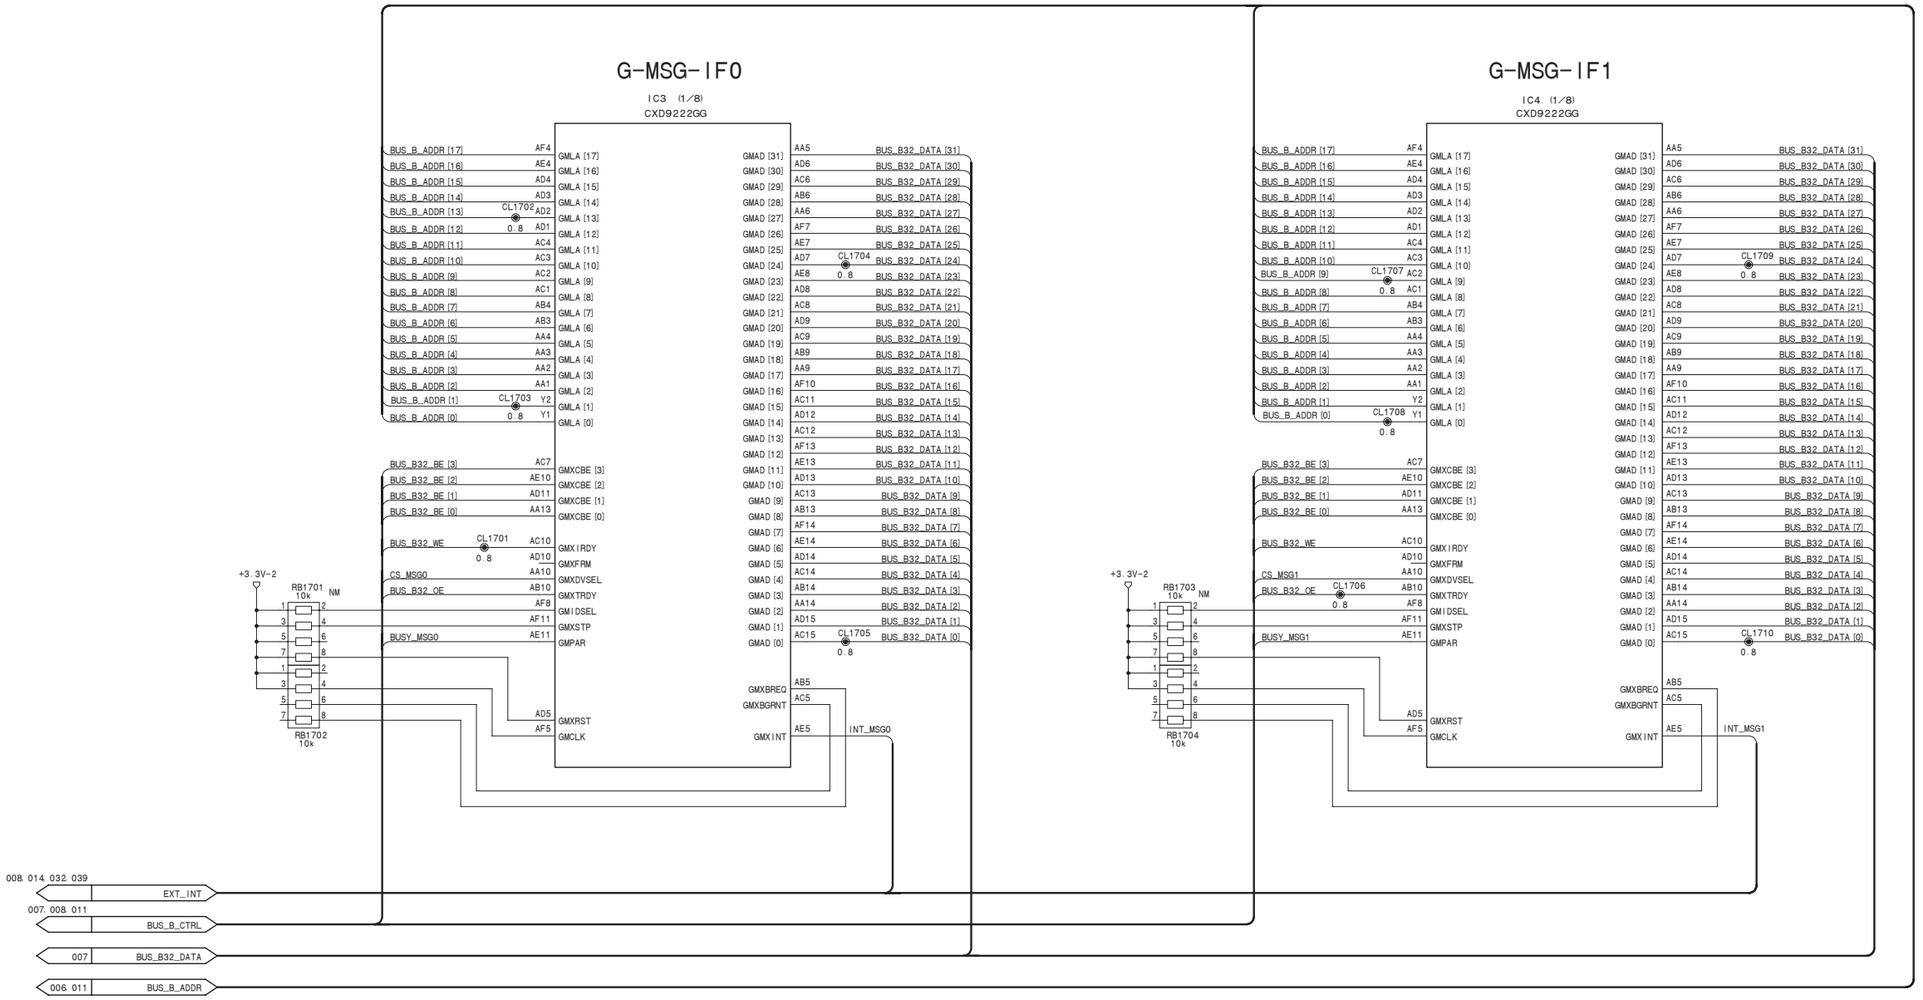

NEPTUNE0&1 (MSG I/F)

CA-82 (17/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_17

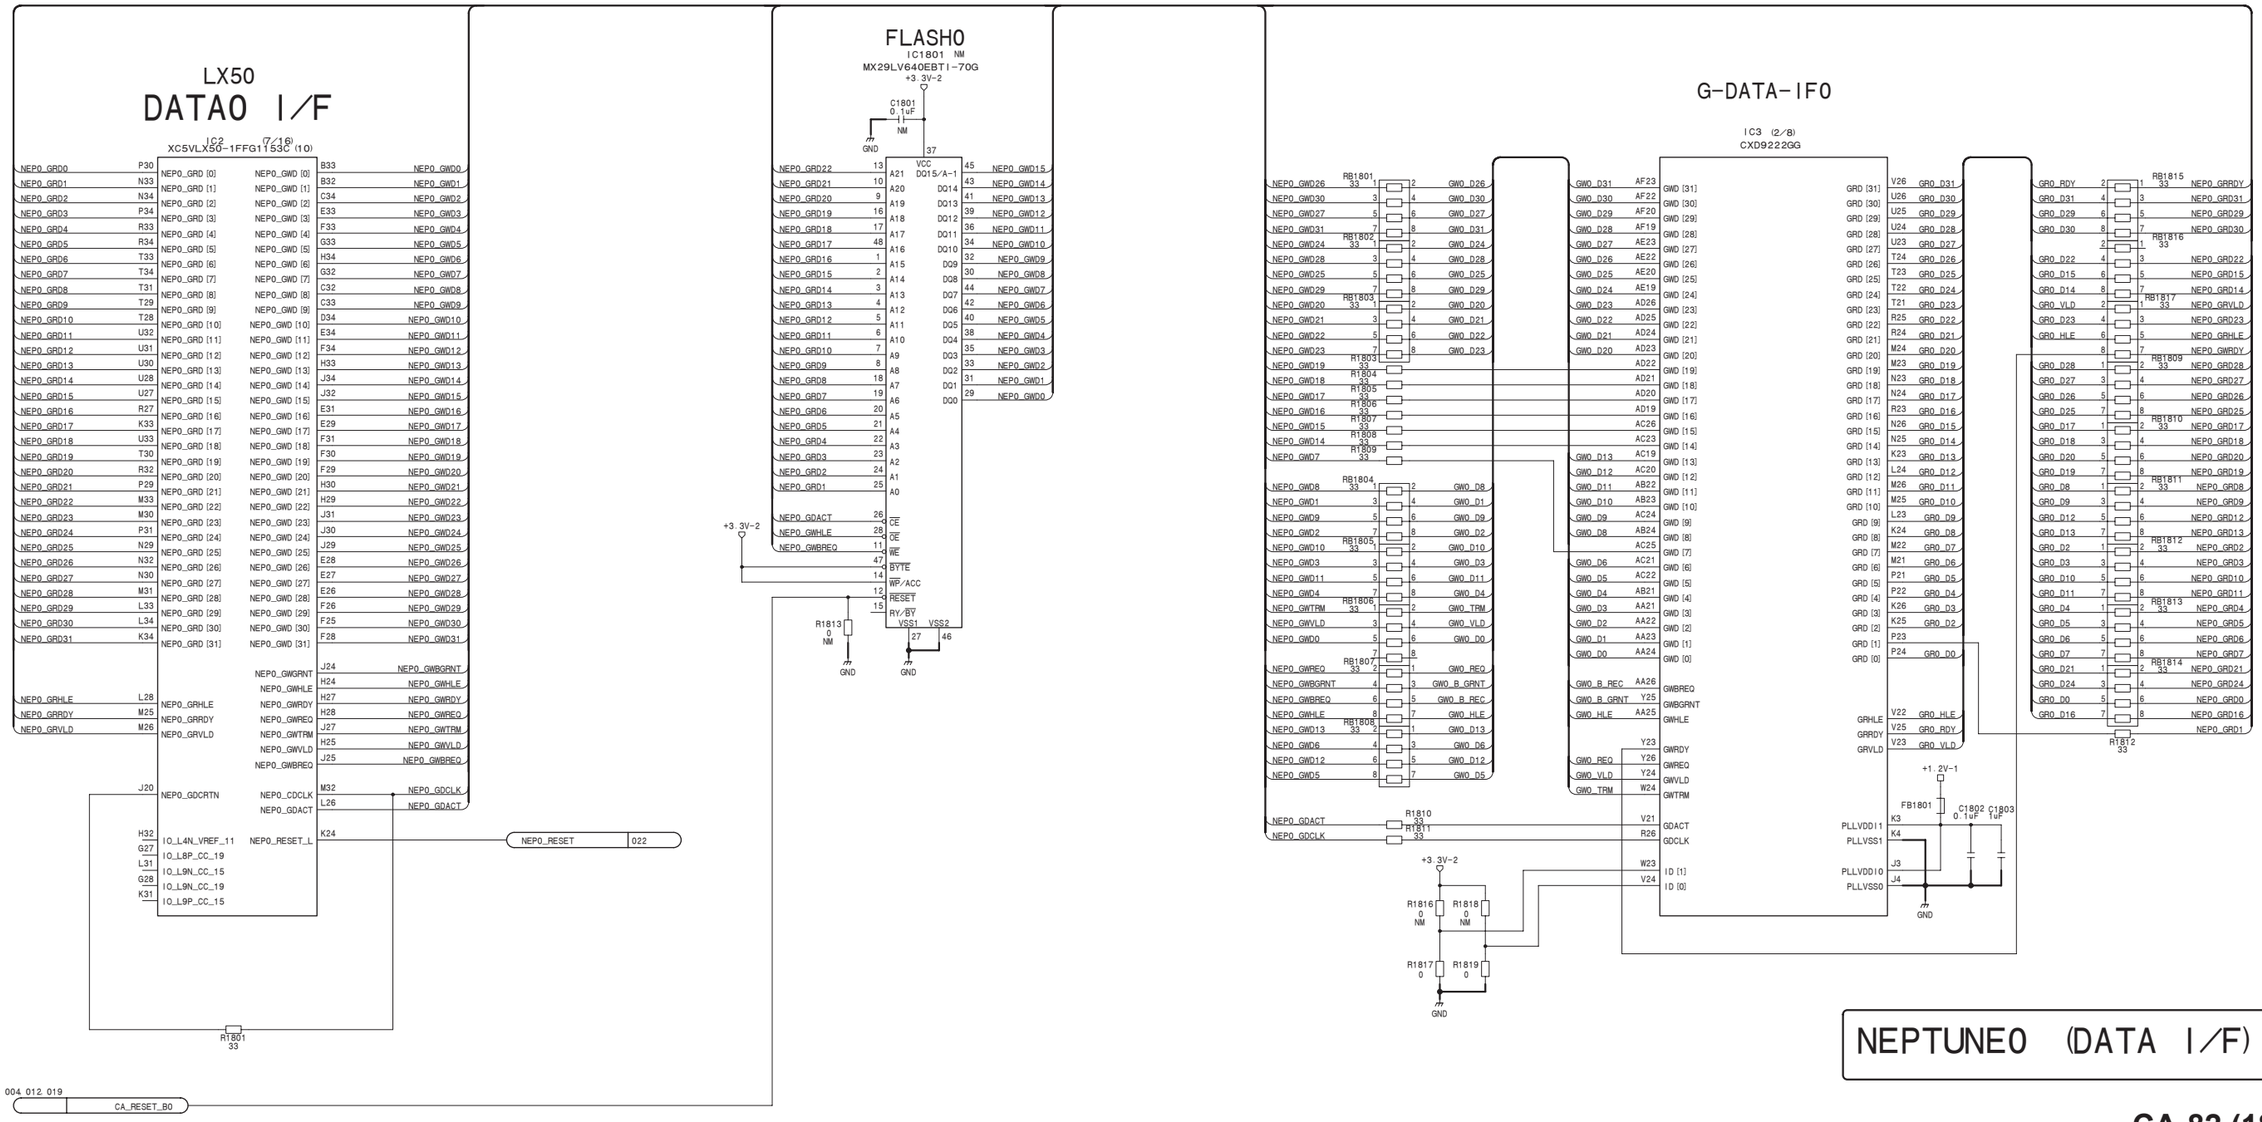

CA-82 (18/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_18

CA-82 (19/42)
SUFFIX: -14

LX50 DATA1 I/F

IC2 (8/16)
XC5VLX50-1FFG1153C (10)

NEP1_GRD0	AH30	NEP1_GRD [0]	NEP1_GWD [0]
NEP1_GRD1	AF34	NEP1_GRD [1]	NEP1_GWD [1]
NEP1_GRD2	AF33	NEP1_GRD [2]	NEP1_GWD [2]
NEP1_GRD3	AH34	NEP1_GRD [3]	NEP1_GWD [3]
NEP1_GRD4	AH33	NEP1_GRD [4]	NEP1_GWD [4]
NEP1_GRD5	AJ34	NEP1_GRD [5]	NEP1_GWD [5]
NEP1_GRD6	AK34	NEP1_GRD [6]	NEP1_GWD [6]
NEP1_GRD7	AK33	NEP1_GRD [7]	NEP1_GWD [7]
NEP1_GRD8	AM33	NEP1_GRD [8]	NEP1_GWD [8]
NEP1_GRD9	AN33	NEP1_GRD [9]	NEP1_GWD [9]
NEP1_GRD10	AN32	NEP1_GRD [10]	NEP1_GWD [10]
NEP1_GRD11	AP32	NEP1_GRD [11]	NEP1_GWD [11]
NEP1_GRD12	AJ31	NEP1_GRD [12]	NEP1_GWD [12]
NEP1_GRD13	AJ30	NEP1_GRD [13]	NEP1_GWD [13]
NEP1_GRD14	AK31	NEP1_GRD [14]	NEP1_GWD [14]
NEP1_GRD15	AJ27	NEP1_GRD [15]	NEP1_GWD [15]
NEP1_GRD16	AJ29	NEP1_GRD [16]	NEP1_GWD [16]
NEP1_GRD17	AJ26	NEP1_GRD [17]	NEP1_GWD [17]
NEP1_GRD18	AL34	NEP1_GRD [18]	NEP1_GWD [18]
NEP1_GRD19	AN34	NEP1_GRD [19]	NEP1_GWD [19]
NEP1_GRD20	AL33	NEP1_GRD [20]	NEP1_GWD [20]
NEP1_GRD21	AF29	NEP1_GRD [21]	NEP1_GWD [21]
NEP1_GRD22	AK27	NEP1_GRD [22]	NEP1_GWD [22]
NEP1_GRD23	AE31	NEP1_GRD [23]	NEP1_GWD [23]
NEP1_GRD24	AH29	NEP1_GRD [24]	NEP1_GWD [24]
NEP1_GRD25	AF30	NEP1_GRD [25]	NEP1_GWD [25]
NEP1_GRD26	AE29	NEP1_GRD [26]	NEP1_GWD [26]
NEP1_GRD27	AG32	NEP1_GRD [27]	NEP1_GWD [27]
NEP1_GRD28	AF31	NEP1_GRD [28]	NEP1_GWD [28]
NEP1_GRD29	AK28	NEP1_GRD [29]	NEP1_GWD [29]
NEP1_GRD30	AM32	NEP1_GRD [30]	NEP1_GWD [30]
NEP1_GRD31	AK29	NEP1_GRD [31]	NEP1_GWD [31]

			V33 NEP1_GWD0
			W34 NEP1_GWD1
			Y33 NEP1_GWD2
			AA33 NEP1_GWD3
			AC34 NEP1_GWD4
			AD34 NEP1_GWD5
			AE33 NEP1_GWD6
			AC29 NEP1_GWD7
			V32 NEP1_GWD8
			Y34 NEP1_GWD9
			AA34 NEP1_GWD10
			AB33 NEP1_GWD11
			AC33 NEP1_GWD12
			AE34 NEP1_GWD13
			AC28 NEP1_GWD14
			AD32 NEP1_GWD15
			AB27 NEP1_GWD16
			AB28 NEP1_GWD17
			AC30 NEP1_GWD18
			AC32 NEP1_GWD19
			Y28 NEP1_GWD20
			AB30 NEP1_GWD21
			AB32 NEP1_GWD22
			AB31 NEP1_GWD23
			W30 NEP1_GWD24
			W31 NEP1_GWD25
			W26 NEP1_GWD26
			Y32 NEP1_GWD27
			W29 NEP1_GWD28
			W27 NEP1_GWD29
			Y31 NEP1_GWD30
			Y29 NEP1_GWD31
		NEP1_GWGRNT	AD26 NEP1_GWBGRNT
		NEP1_GWHLE	AE27 NEP1_GWHLE
AF28	NEP1_GRHLE	NEP1_GWRDY	Y26 NEP1_GWRDY
AG27	NEP1_GRRDY	NEP1_GWREQ	Y27 NEP1_GWREQ
AG28	NEP1_GRVLD	NEP1_GWTRM	AE26 NEP1_GWTRM
		NEP1_GWVLD	AE28 NEP1_GWVLD
		NEP1_GWBREQ	AD27 NEP1_GWBREQ
AG15	NEP1_GDCRTN	NEP1_CDCLK	AJ32 NEP1_GDCLK
		NEP1_GDACT	AF26 NEP1_GDACT
AH32	IO_L14N_VREF_13	NEP1_RESET_L	W32 NEP1_RESET 023
AK32	IO_L15N_13		
AH28	IO_L6N_21		
V29	IO_L7N_17		
AK26	IO_L8P_CC_21		

R1901 33

004_012_018
CA_RESET_B0

FLASH1

IC1901 NM
MX29LV640EBTI-70G

+3.3V-2
C1901 0.1uF NM
GND

NEP1_GRD22	13	A21	DQ15/A-1 45 NEP1_GWD15
NEP1_GRD21	10	A20	DQ14 43 NEP1_GWD14
NEP1_GRD20	9	A19	DQ13 41 NEP1_GWD13
NEP1_GRD19	16	A18	DQ12 39 NEP1_GWD12
NEP1_GRD18	17	A17	DQ11 36 NEP1_GWD11
NEP1_GRD17	48	A16	DQ10 34 NEP1_GWD10
NEP1_GRD16	1	A15	DQ9 32 NEP1_GWD9
NEP1_GRD15	2	A14	DQ8 30 NEP1_GWD8
NEP1_GRD14	3	A13	DQ7 44 NEP1_GWD7
NEP1_GRD13	4	A12	DQ6 42 NEP1_GWD6
NEP1_GRD12	5	A11	DQ5 40 NEP1_GWD5
NEP1_GRD11	6	A10	DQ4 38 NEP1_GWD4
NEP1_GRD10	7	A9	DQ3 35 NEP1_GWD3
NEP1_GRD9	8	A8	DQ2 33 NEP1_GWD2
NEP1_GRD8	18	A7	DQ1 31 NEP1_GWD1
NEP1_GRD7	19	A6	DQ0 29 NEP1_GWD0
NEP1_GRD6	20	A5	
NEP1_GRD5	21	A4	
NEP1_GRD4	22	A3	
NEP1_GRD3	23	A2	
NEP1_GRD2	24	A1	
NEP1_GRD1	25	A0	
NEP1_GDACT	26	CE	
NEP1_GWHLE	28	OE	
NEP1_GWBREQ	11	WE	
	47	BYTE	
	14	WP/ACC	
	12	RESET	
	15	RY/BY	
		VSS1 27	VSS2 46

+3.3V-2
R1913 0 NM
GND GND

G-DATA-IF1

IC4 (2/8)
CXD9222GG

GW1_D31	AF23	GWD [31]	GR1_D31 V26
GW1_D30	AF22	GWD [30]	GR1_D30 U26
GW1_D29	AF20	GWD [29]	GR1_D29 U25
GW1_D28	AF19	GWD [28]	GR1_D28 U24
GW1_D27	AE23	GWD [27]	GR1_D27 U23
GW1_D26	AE22	GWD [26]	GR1_D26 T24
GW1_D25	AE20	GWD [25]	GR1_D25 T23
GW1_D24	AE19	GWD [24]	GR1_D24 T22
GW1_D23	AD26	GWD [23]	GR1_D23 T21
GW1_D22	AD25	GWD [22]	GR1_D22 R25
GW1_D21	AD24	GWD [21]	GR1_D21 R24
GW1_D20	AD23	GWD [20]	GR1_D20 M24
	AD22	GWD [19]	GR1_D19 M23
	AD21	GWD [18]	GR1_D18 N23
	AD20	GWD [17]	GR1_D17 N24
	AD19	GWD [16]	GR1_D16 R23
	AC26	GWD [15]	GR1_D15 N26
	AC23	GWD [14]	GR1_D14 N25
GW1_D13	AC19	GWD [13]	GR1_D13 K23
GW1_D12	AC20	GWD [12]	GR1_D12 L24
GW1_D11	AB22	GWD [11]	GR1_D11 M26
GW1_D10	AB23	GWD [10]	GR1_D10 M25
GW1_D9	AC24	GWD [9]	GR1_D9 L23
GW1_D8	AB24	GWD [8]	GR1_D8 K24
	AC25	GWD [7]	GR1_D7 M22
GW1_D6	AC21	GWD [6]	GR1_D6 M21
GW1_D5	AC22	GWD [5]	GR1_D5 P21
GW1_D4	AB21	GWD [4]	GR1_D4 P22
GW1_D3	AA21	GWD [3]	GR1_D3 K26
GW1_D2	AA22	GWD [2]	GR1_D2 K25
GW1_D1	AA23	GWD [1]	P23
GW1_D0	AA24	GWD [0]	GR1_D0 P24
GW1_B_REC	AA26	GWBREQ	
GW1_B_GRNT	Y25	GWBGRNT	
GW1_HLE	AA25	GWHLE	
	Y23	GWRDY	GRHLE V22 GR1_HLE
GW1_REQ	Y26	GWREQ	GRRDY V25 GR1_RDY
GW1_VLD	Y24	GWVLD	GRVLD V23 GR1_VLD
GW1_TRM	W24	GWTRM	
	V21	GDACT	PLLVDD11 K3
	R26	GDCLK	PLLVSS1 K4
	W23	ID [1]	PLLVDD10 J3
	V24	ID [0]	PLLVSS0 J4

GR1_RDY	2	RB1915 33	1 NEP1_GRRDY
GR1_D31	4		3 NEP1_GRD31
GR1_D29	6		5 NEP1_GRD29
GR1_D30	8		7 NEP1_GRD30
	2	RB1916 33	1
GR1_D22	4		3 NEP1_GRD22
GR1_D15	6		5 NEP1_GRD15
GR1_D14	8		7 NEP1_GRD14
GR1_VLD	2	RB1917 33	1 NEP1_GRVLD
GR1_D23	4		3 NEP1_GRD23
GR1_HLE	6		5 NEP1_GRHLE
	8		7 NEP1_GWRDY
GR1_D28	1	RB1909 33	2 NEP1_GRD28
GR1_D27	3		4 NEP1_GRD27
GR1_D26	5		6 NEP1_GRD26
GR1_D25	7		8 NEP1_GRD25
GR1_D17	1	RB1910 33	2 NEP1_GRD17
GR1_D18	3		4 NEP1_GRD18
GR1_D20	5		6 NEP1_GRD20
GR1_D19	7		8 NEP1_GRD19
GR1_D8	1	RB1911 33	2 NEP1_GRD8
GR1_D9	3		4 NEP1_GRD9
GR1_D12	5		6 NEP1_GRD12
GR1_D13	7		8 NEP1_GRD13
GR1_D2	1	RB1912 33	2 NEP1_GRD2
GR1_D3	3		4 NEP1_GRD3
GR1_D10	5		6 NEP1_GRD10
GR1_D11	7		8 NEP1_GRD11
GR1_D4	1	RB1913 33	2 NEP1_GRD4
GR1_D5	3		4 NEP1_GRD5
GR1_D6	5		6 NEP1_GRD6
GR1_D7	7		8 NEP1_GRD7
GR1_D21	1	RB1914 33	2 NEP1_GRD21
GR1_D24	3		4 NEP1_GRD24
GR1_D0	5		6 NEP1_GRD0
GR1_D16	7		8 NEP1_GRD16
			NEP1_GRD1

R1912 33

+1.2V-1
FB1901
C1902 0.1uF C1903 1uF
GND

GW1_D26	2	RB1901 33	1 NEP1_GWD26
GW1_D30	4		3 NEP1_GWD30
GW1_D27	6		5 NEP1_GWD27
GW1_D31	8		7 NEP1_GWD31
GW1_D24	2	RB1902 33	1 NEP1_GWD24
GW1_D28	4		3 NEP1_GWD28
GW1_D25	6		5 NEP1_GWD25
GW1_D29	8		7 NEP1_GWD29
GW1_D20	2	RB1903 33	1 NEP1_GWD20
GW1_D21	4		3 NEP1_GWD21
GW1_D22	6		5 NEP1_GWD22
GW1_D23	8		7 NEP1_GWD23
		R1903 33	NEP1_GWD19
		R1904 33	NEP1_GWD18
		R1905 33	NEP1_GWD17
		R1906 33	NEP1_GWD16
		R1907 33	NEP1_GWD15
		R1908 33	NEP1_GWD14
		R1909 33	NEP1_GWD7
GW1_D8	2	RB1904 33	1 NEP1_GWD8
GW1_D1	4		3 NEP1_GWD1
GW1_D9	6		5 NEP1_GWD9
GW1_D2	8		7 NEP1_GWD2
GW1_D10	2	RB1905 33	1 NEP1_GWD10
GW1_D3	4		3 NEP1_GWD3
GW1_D11	6		5 NEP1_GWD11
GW1_D4	8		7 NEP1_GWD4
GW1_TRM	2	RB1906 33	1 NEP1_GWTRM
GW1_VLD	4		3 NEP1_GWVLD
GW1_D0	6		5 NEP1_GWD0
	8		7 NEP1_GWBREQ
GW1_REQ	2	RB1907 33	1 NEP1_GWREQ
GW1_B_GRNT	4		3 GW1_B_GRNT
GW1_B_REC	6		5 GW1_B_REC
GW1_HLE	8		7 GW1_HLE
GW1_D13	2	RB1908 33	1 GW1_D13
GW1_D6	4		3 GW1_D6
GW1_D12	6		5 GW1_D12
GW1_D5	8		7 GW1_D5

R1910 33
R1911 33
NEP1_GDACT
NEP1_GDCLK

+3.3V-2
R1916 0 NM
R1918 0 NM
R1917 0
R1919 0
GND

NEPTUNE1 (DATA I/F)

CA-82 (19/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_19

4-21 (a)

CA-82 (20/42)
SUFFIX: -14

MDDR0
(Network)

MDDR0
(Processor)

NEPTUNE0 MDDR

CA-82 (20/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_20

CA-82 (21/42)
SUFFIX: -14

MDDR1
(Network)

MDDR1
(Processor)

NEPTUNE1 MDDR

CA-82 (21/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_21

CA-82 (22/42) **SUFFIX: -14**

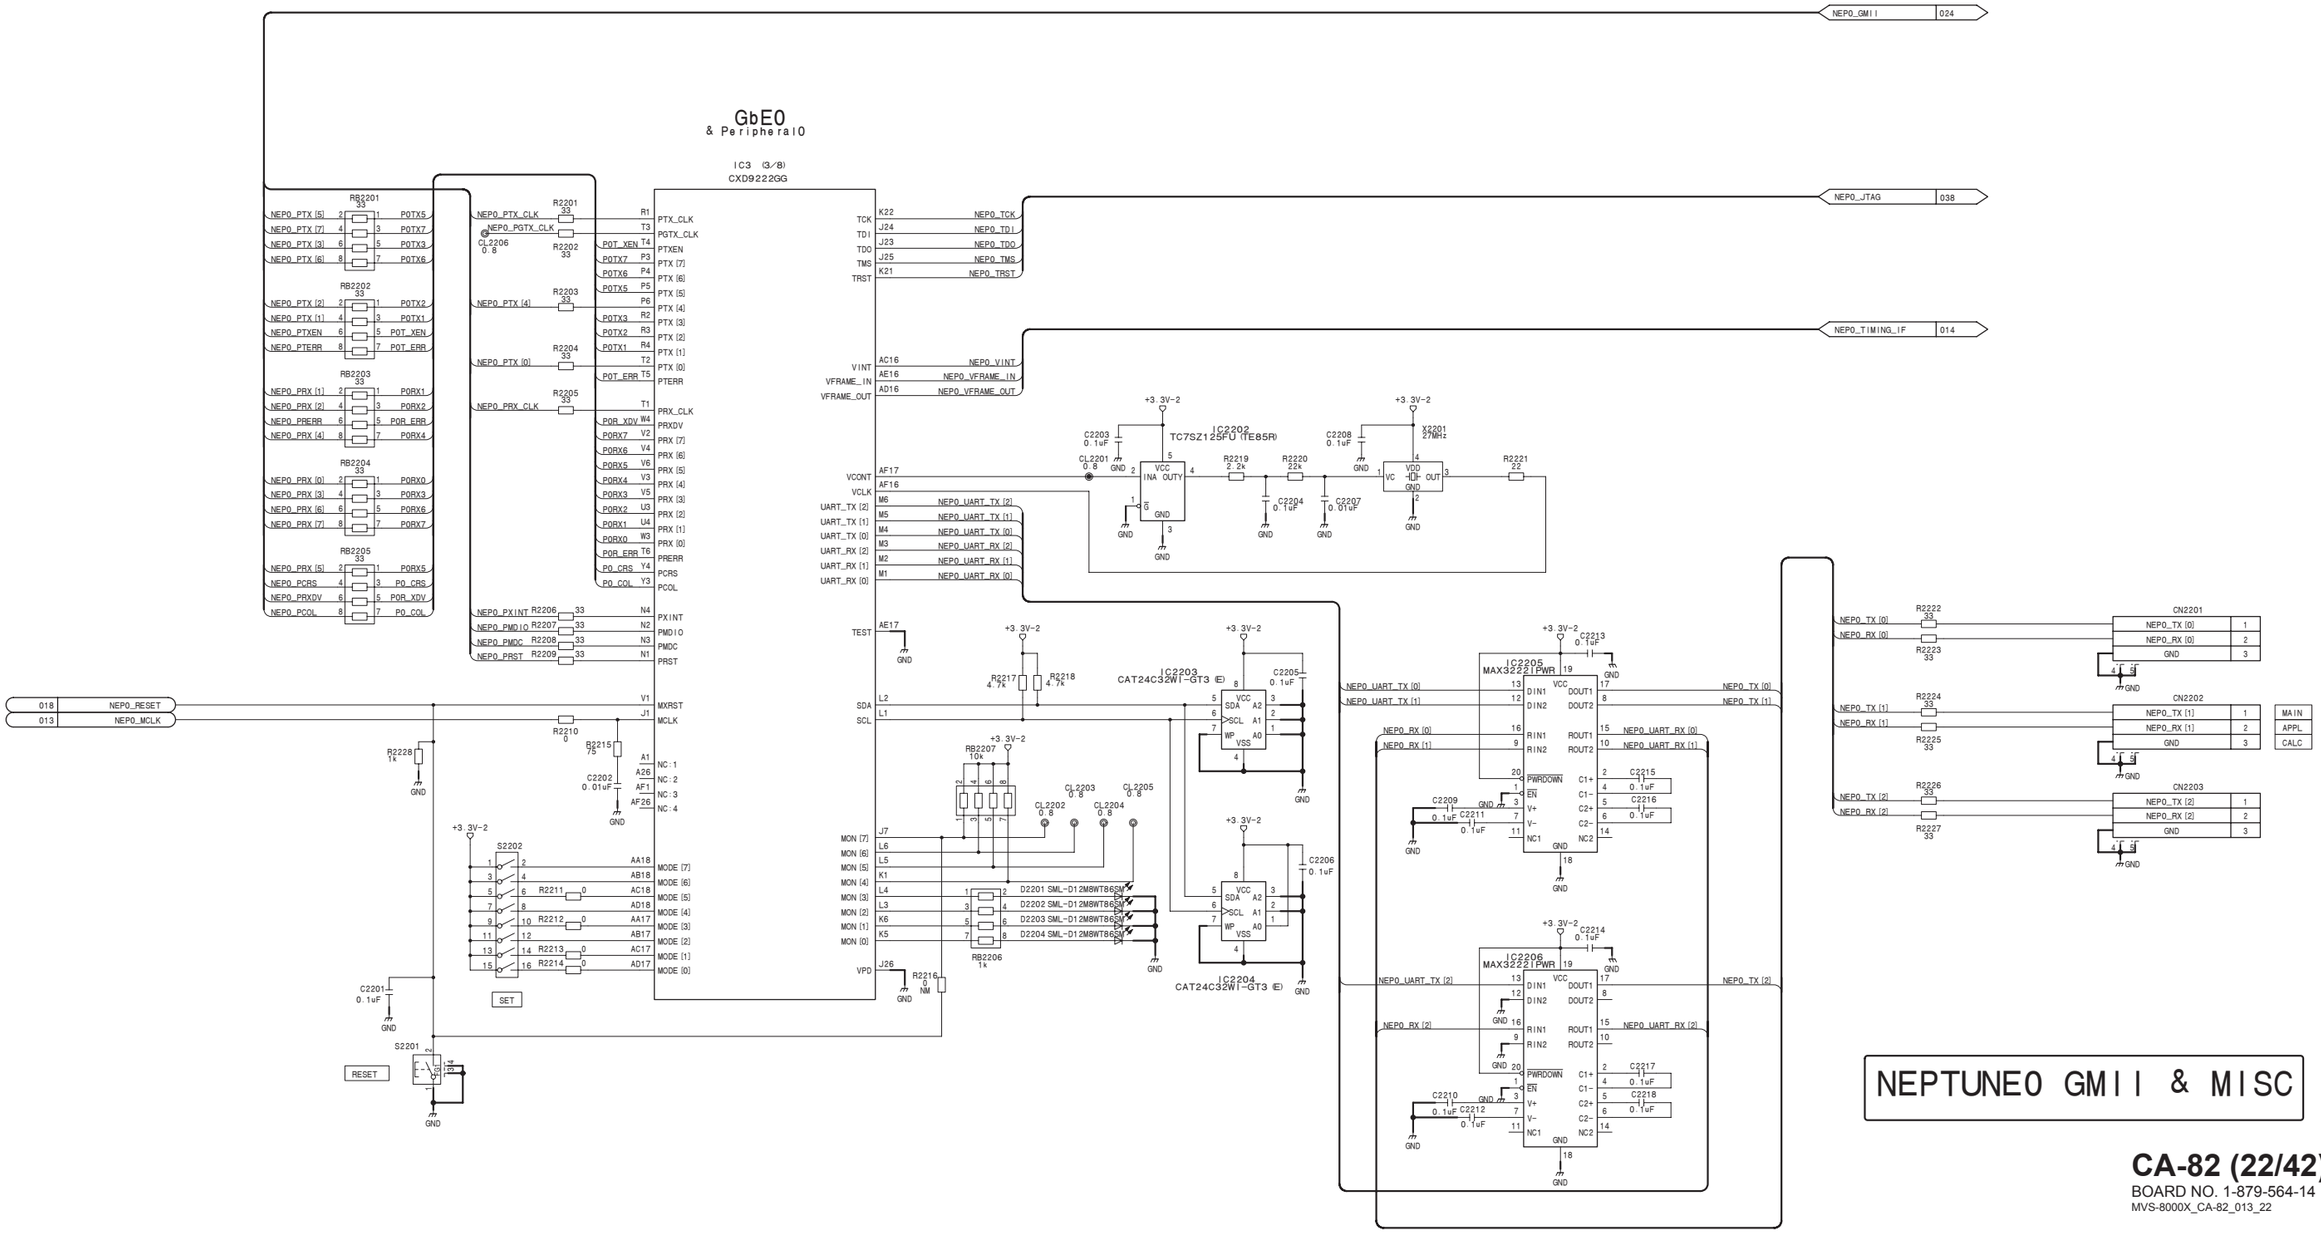

NEPTUNEO GMII & MISC

CA-82 (22/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_22

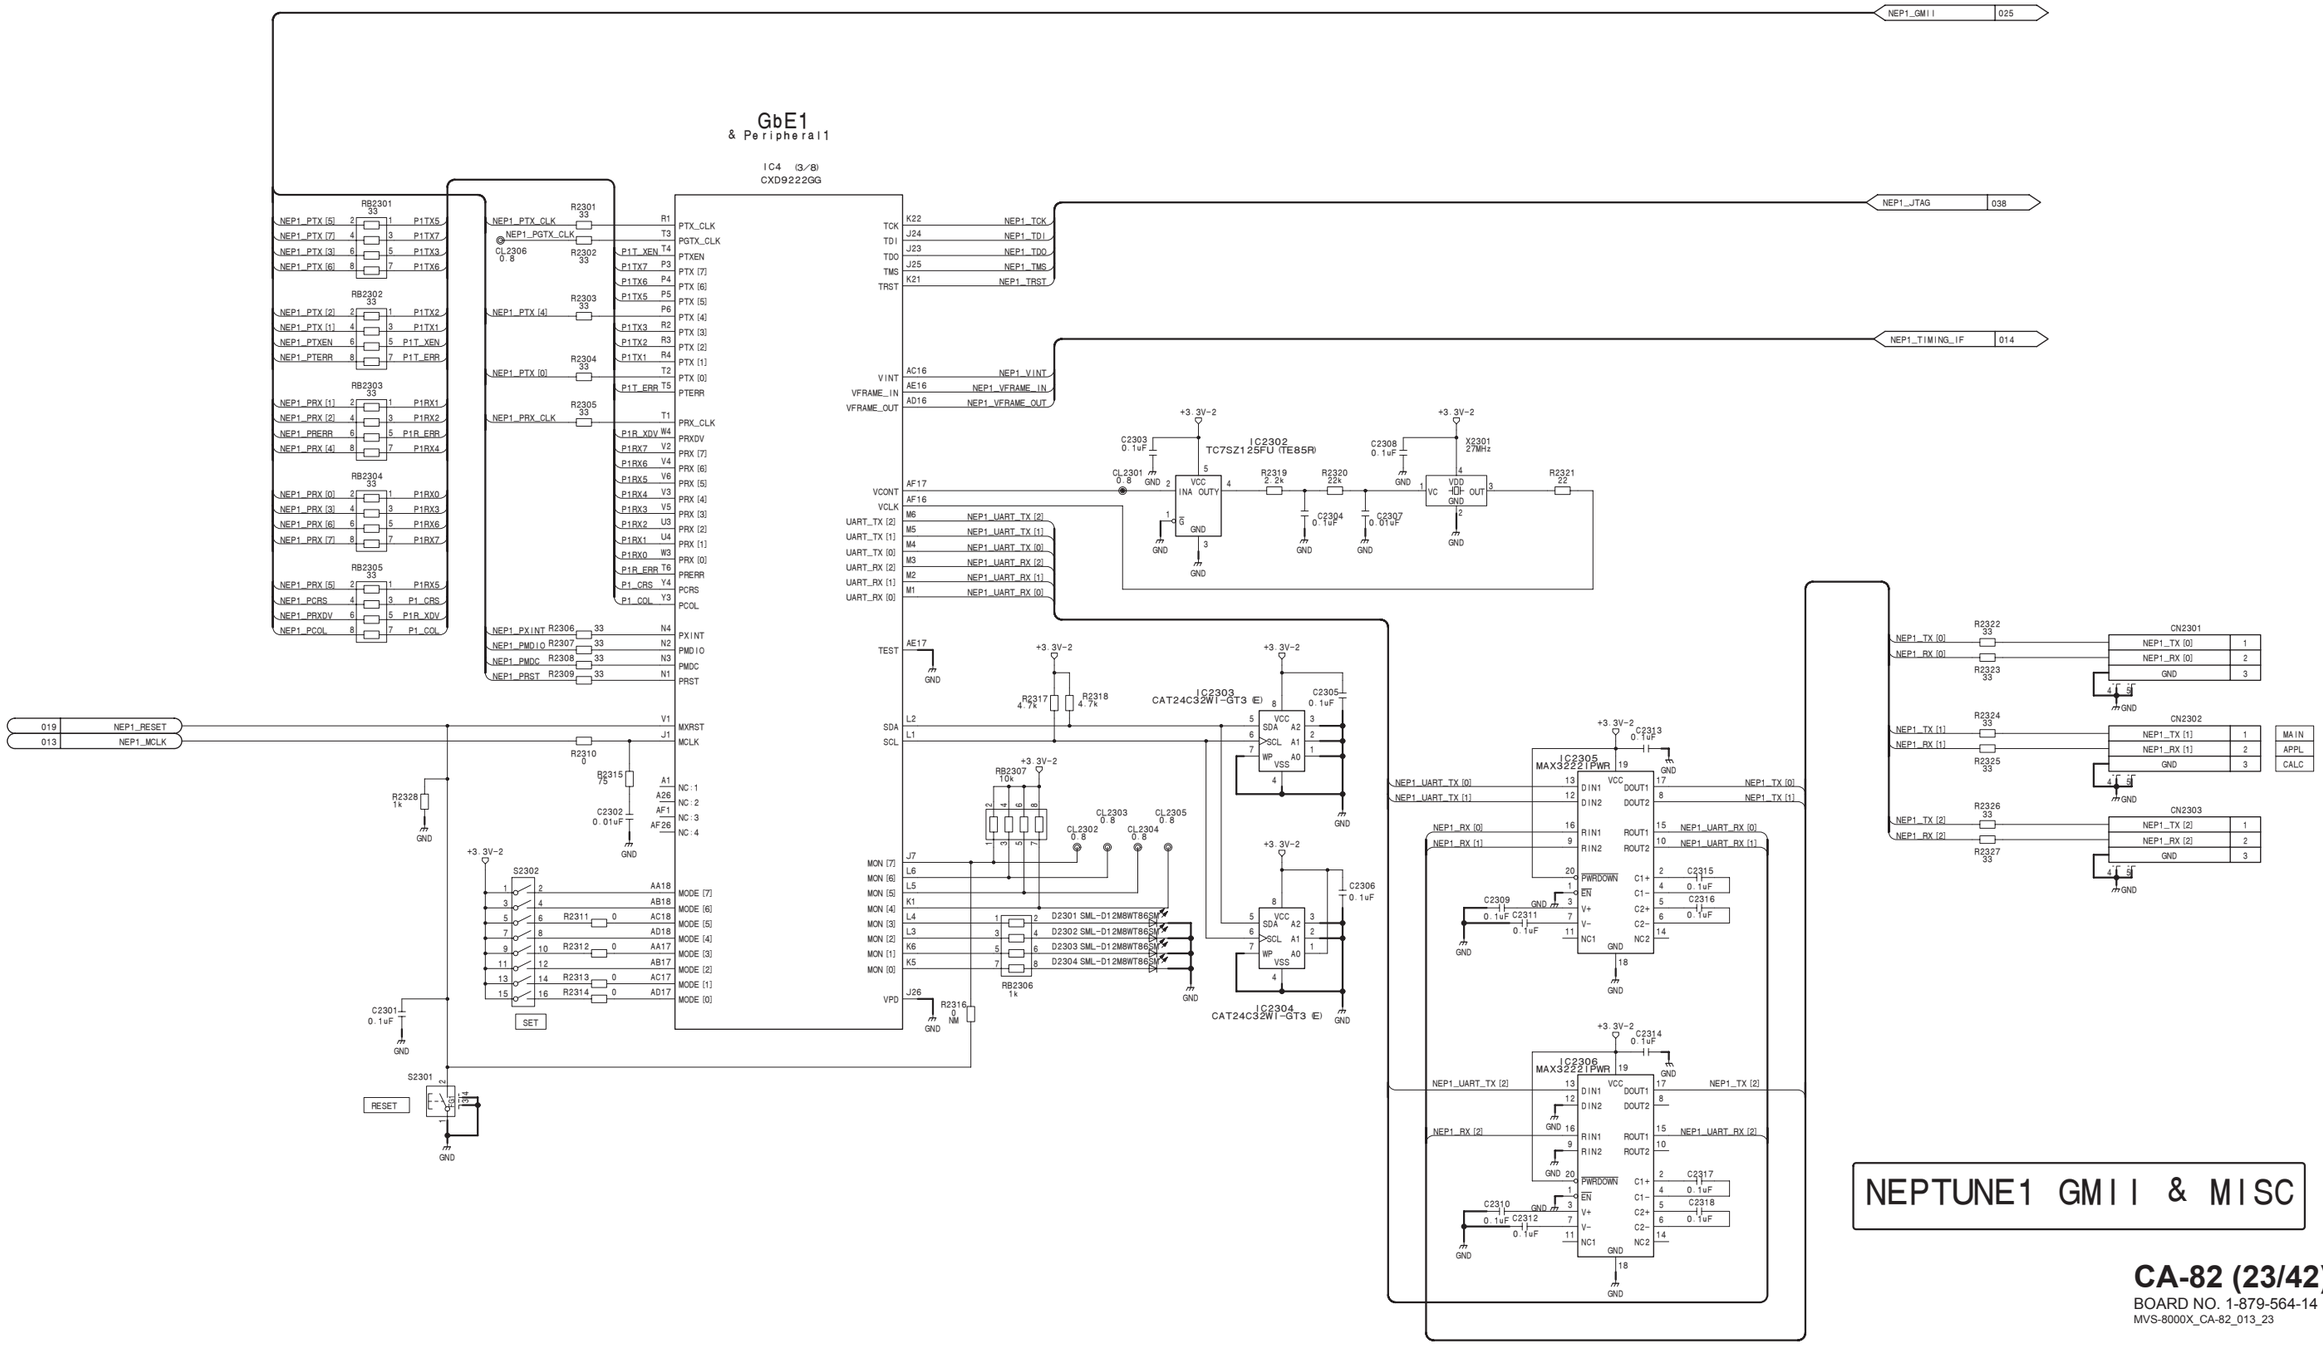

NEPTUNE1 GMII & MISC

CA-82 (23/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_23

CA-82 (24/42)
SUFFIX: -14

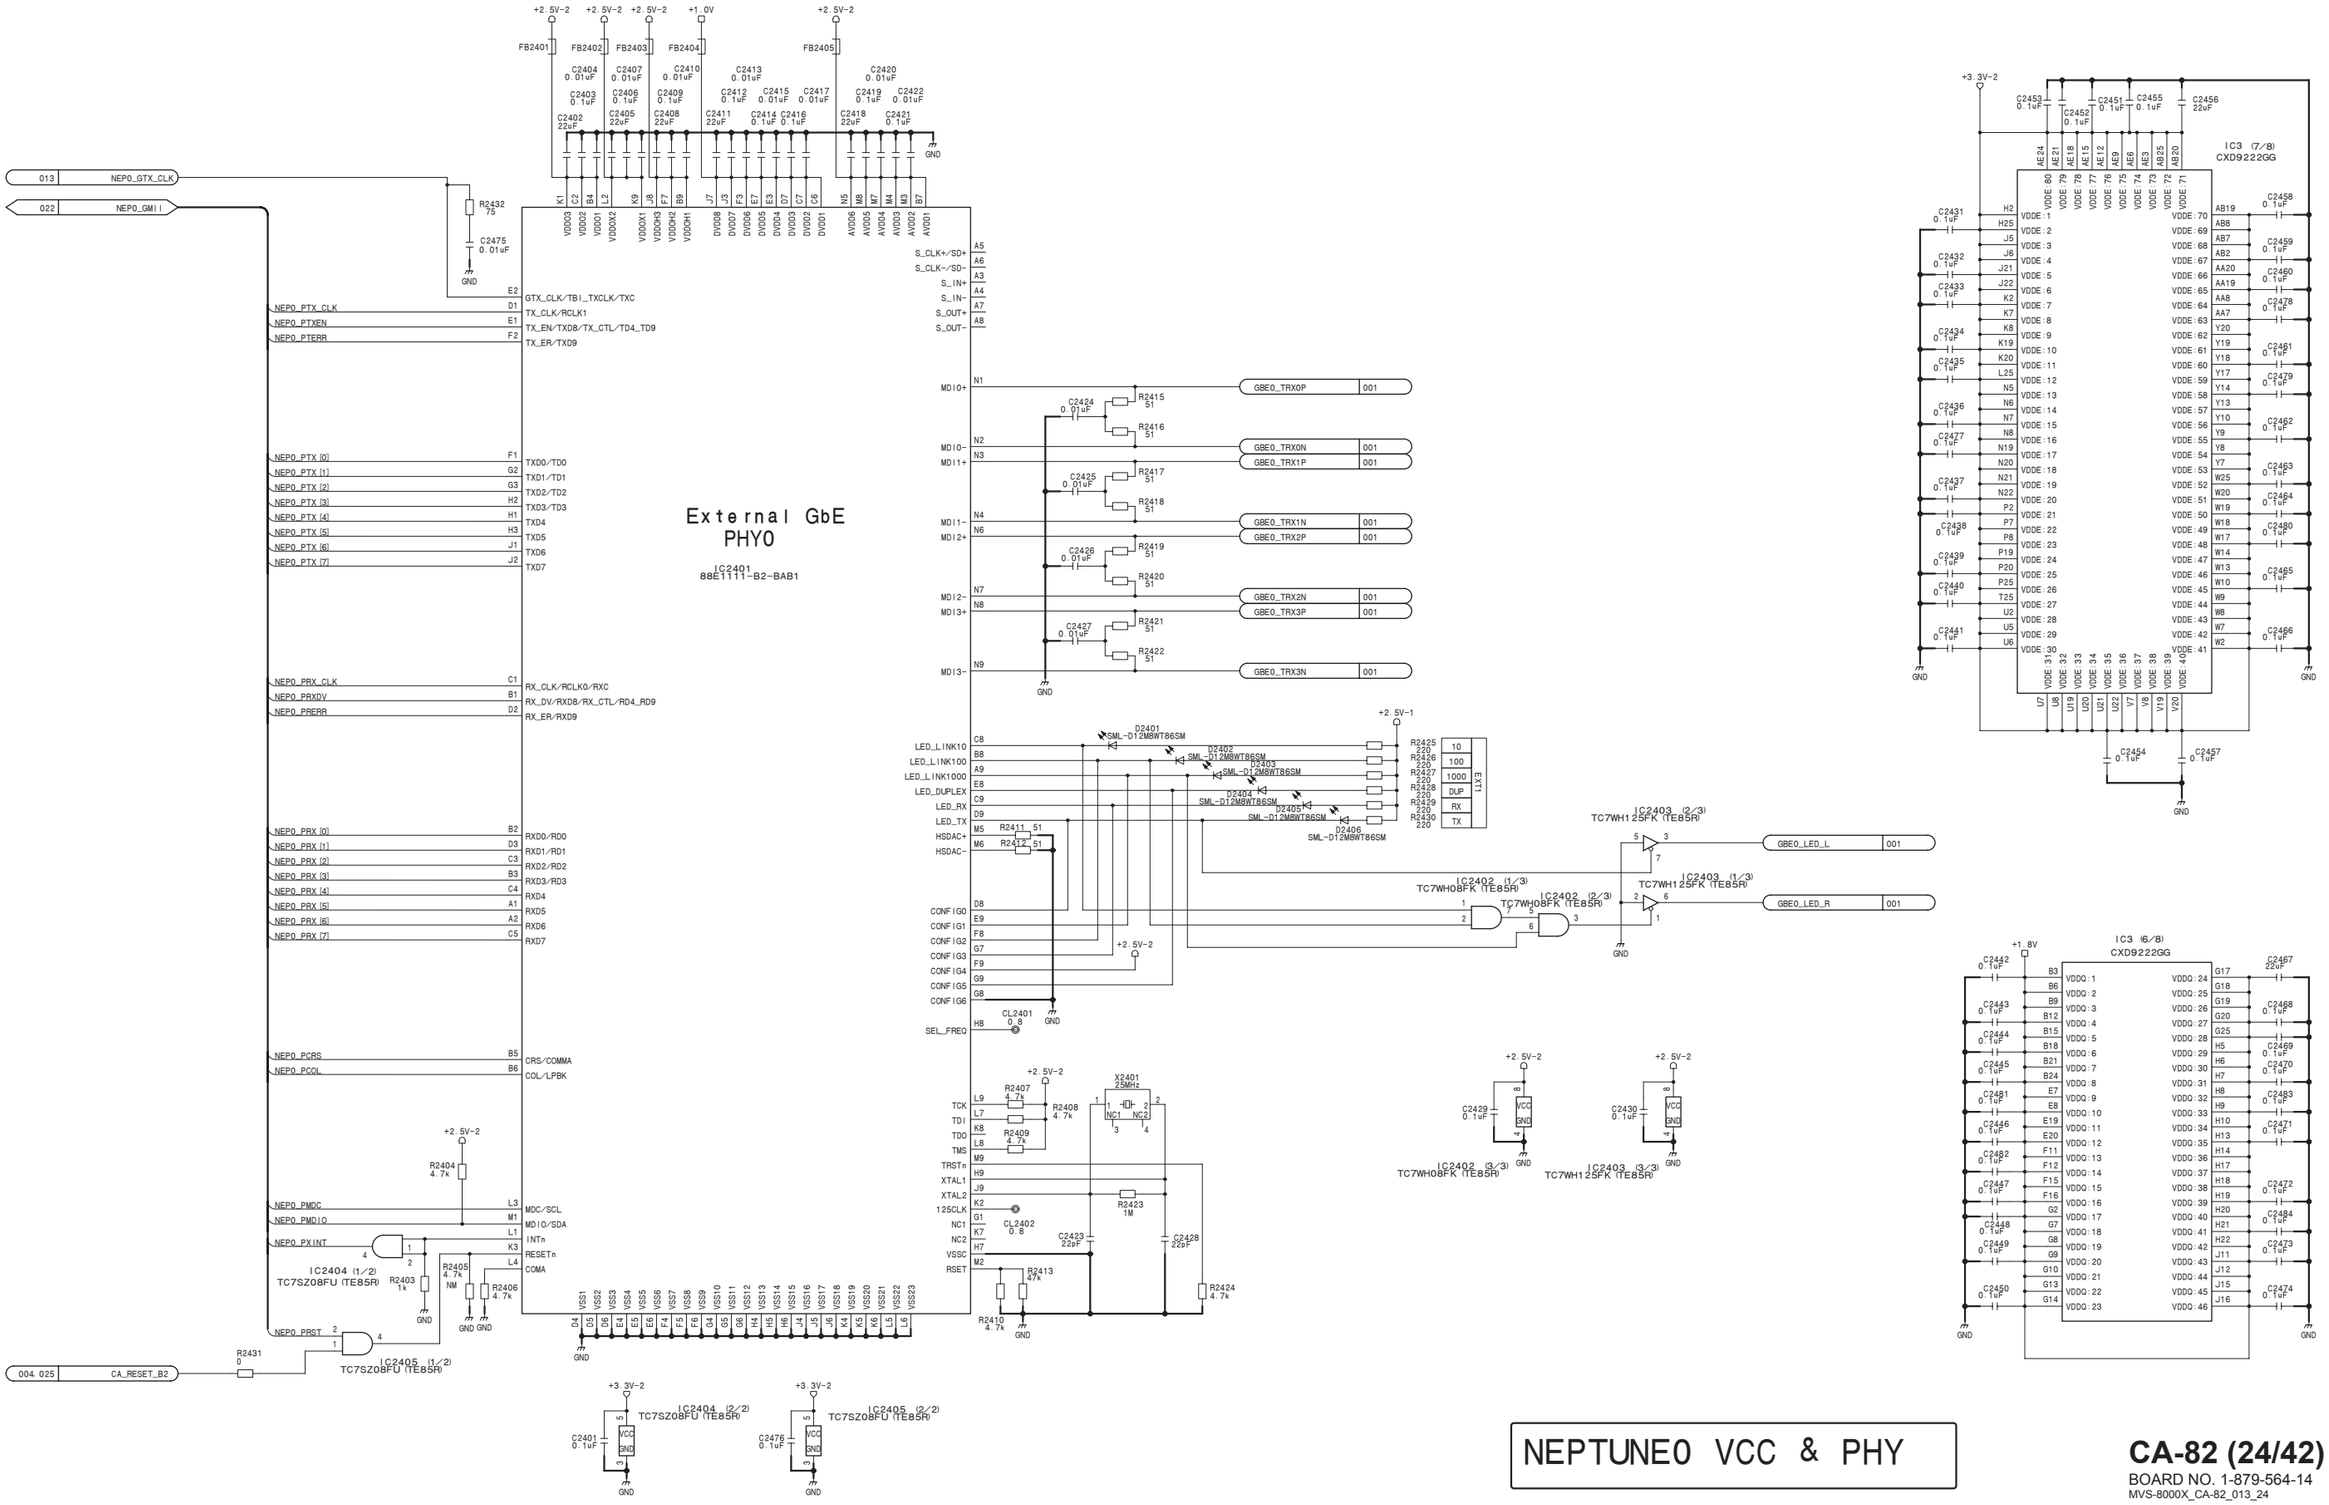

NEPTUNE0 VCC & PHY

CA-82 (24/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_24

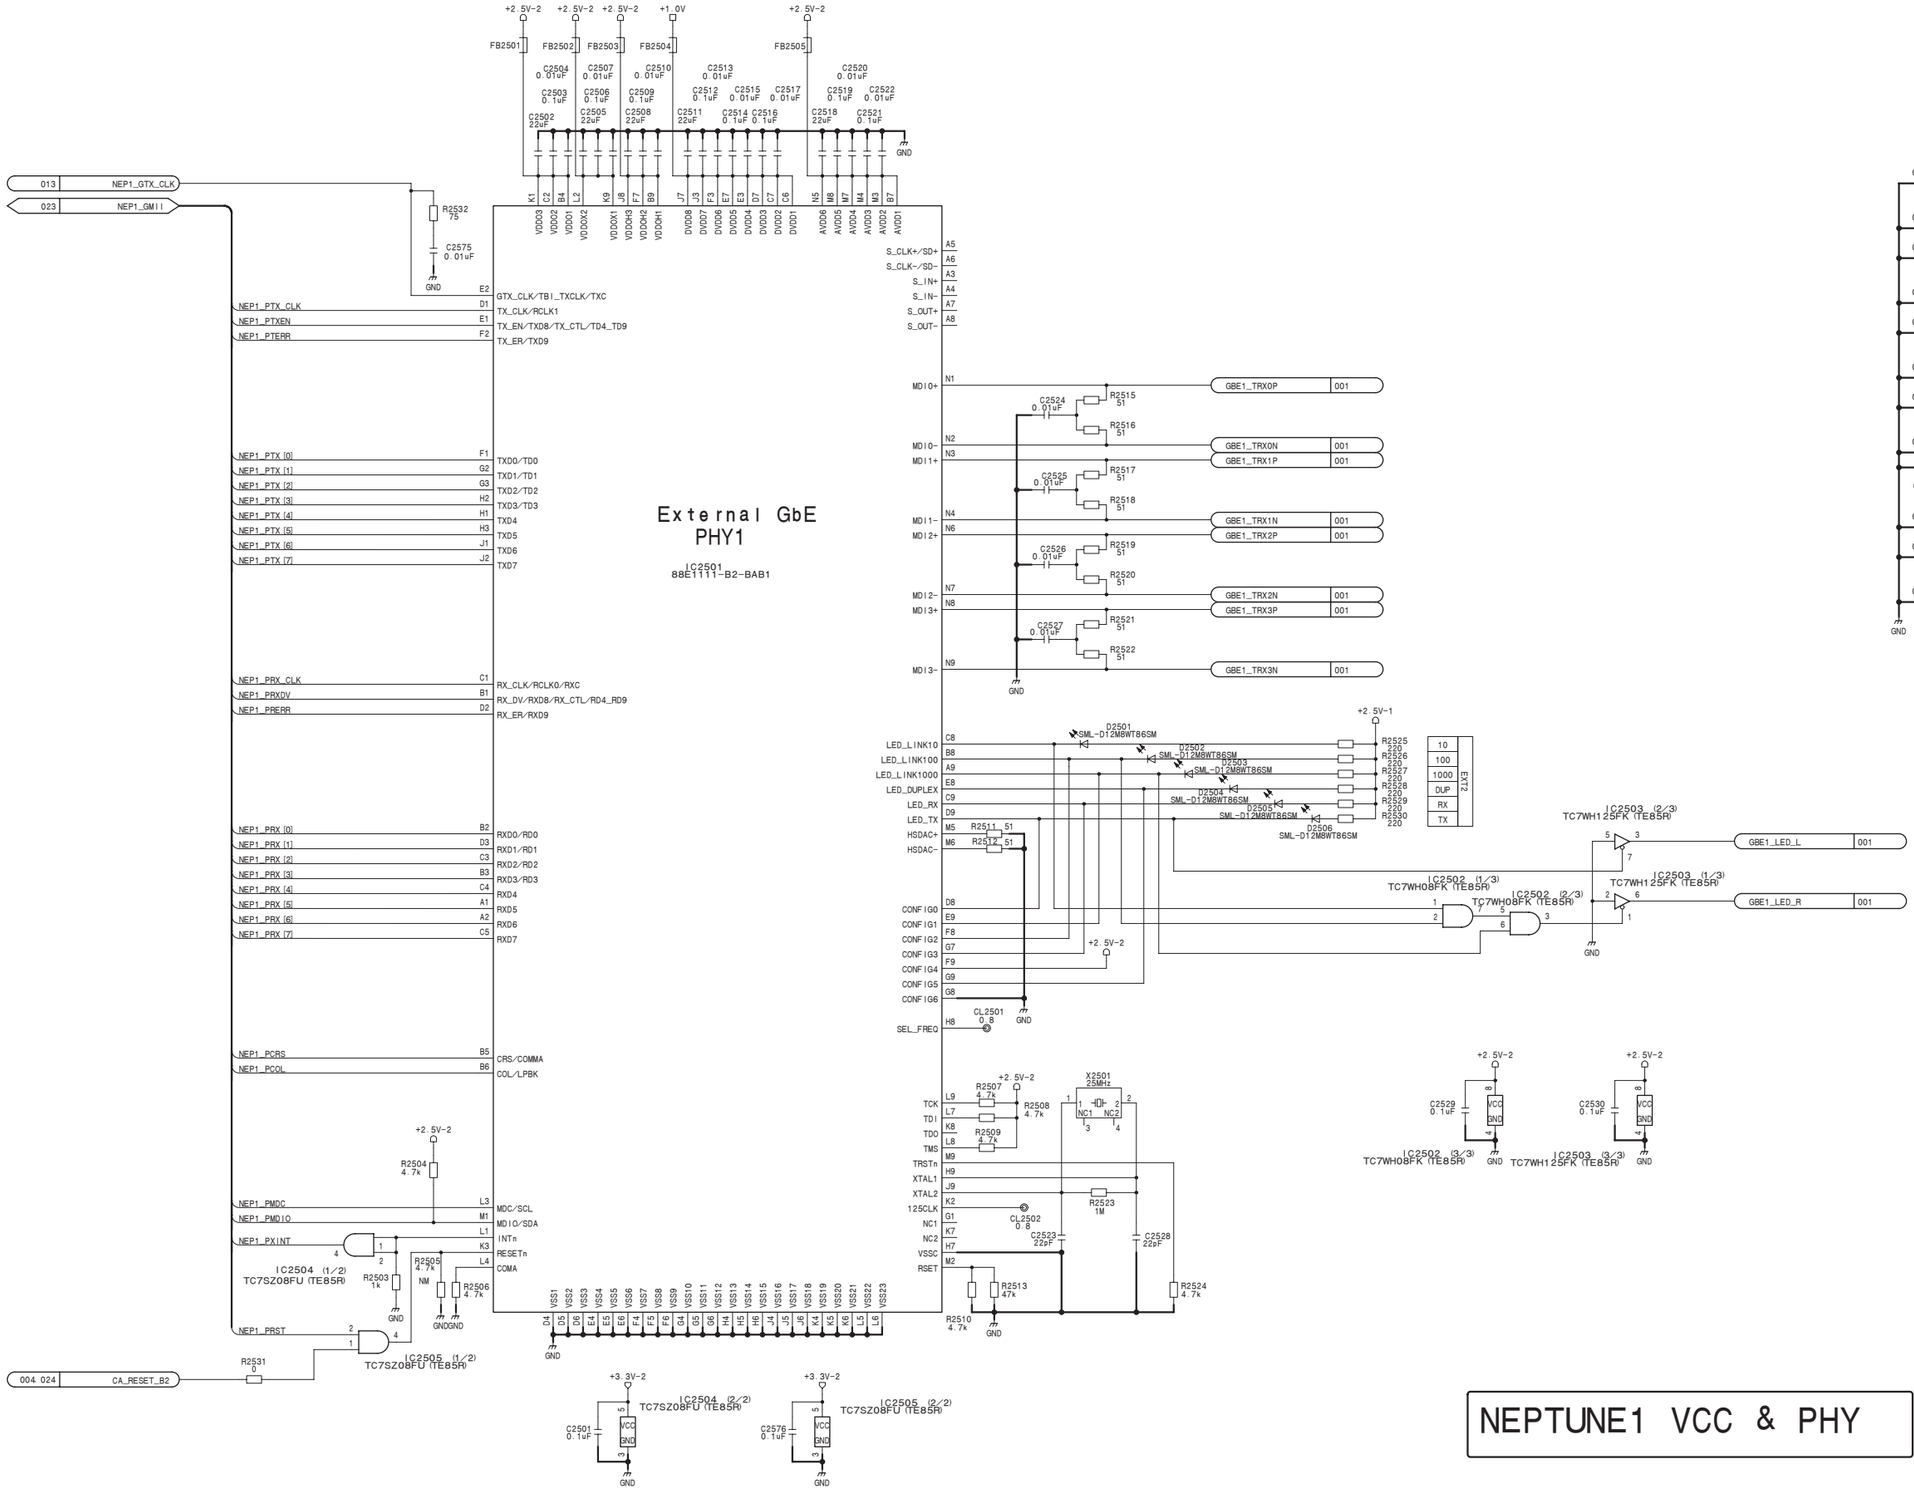

CA-82 (25/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_25

CA-82 (26/42)
SUFFIX: -14

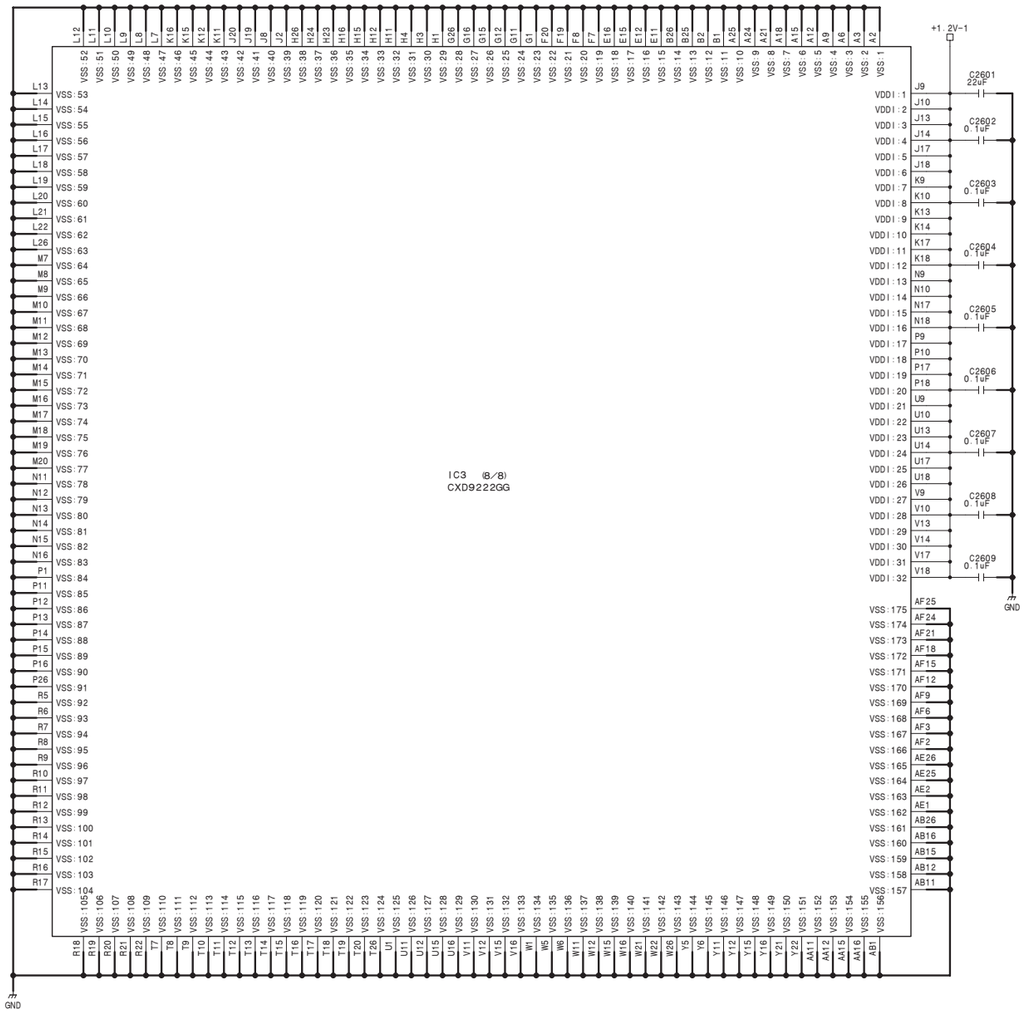

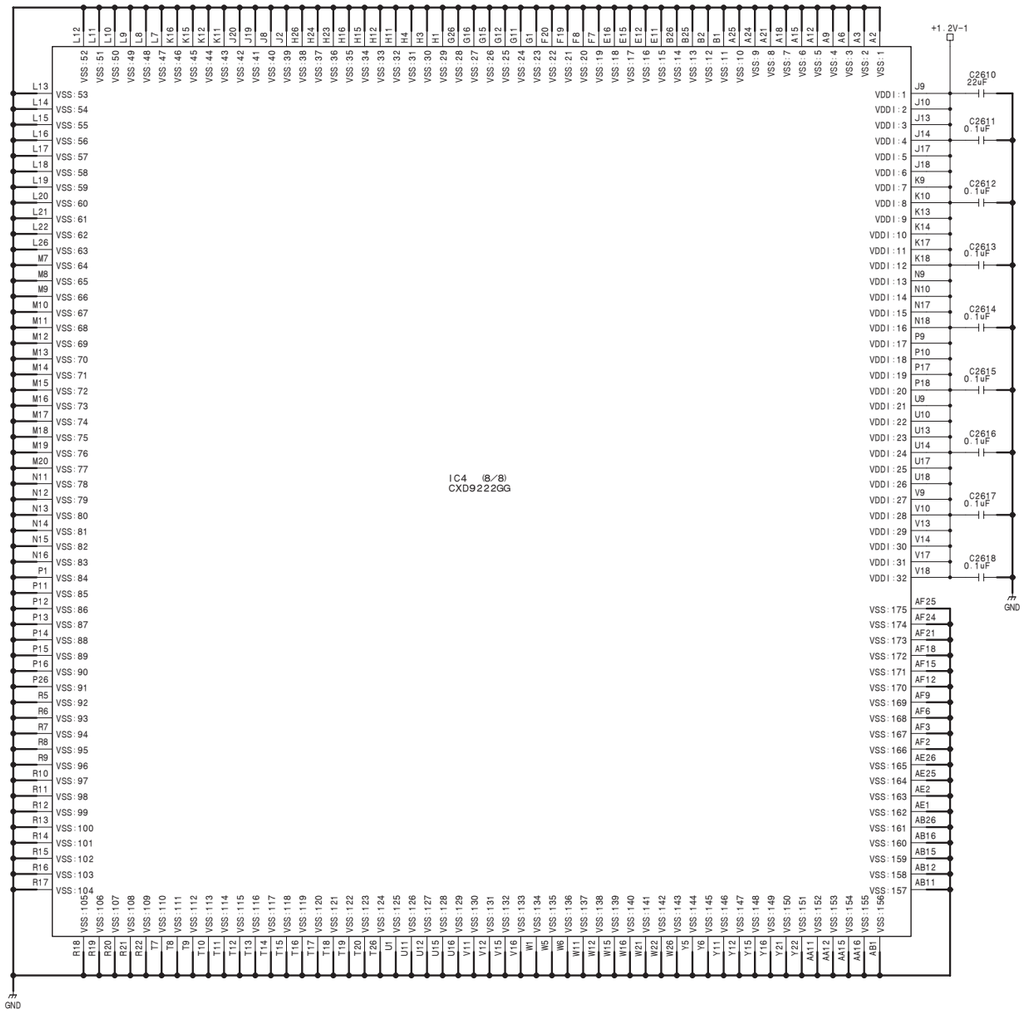

NEPTUNE0&1 VCC & GND

CA-82 (26/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_26

4-28 (a)

CA-82 (27/42) **SUFFIX: -14**

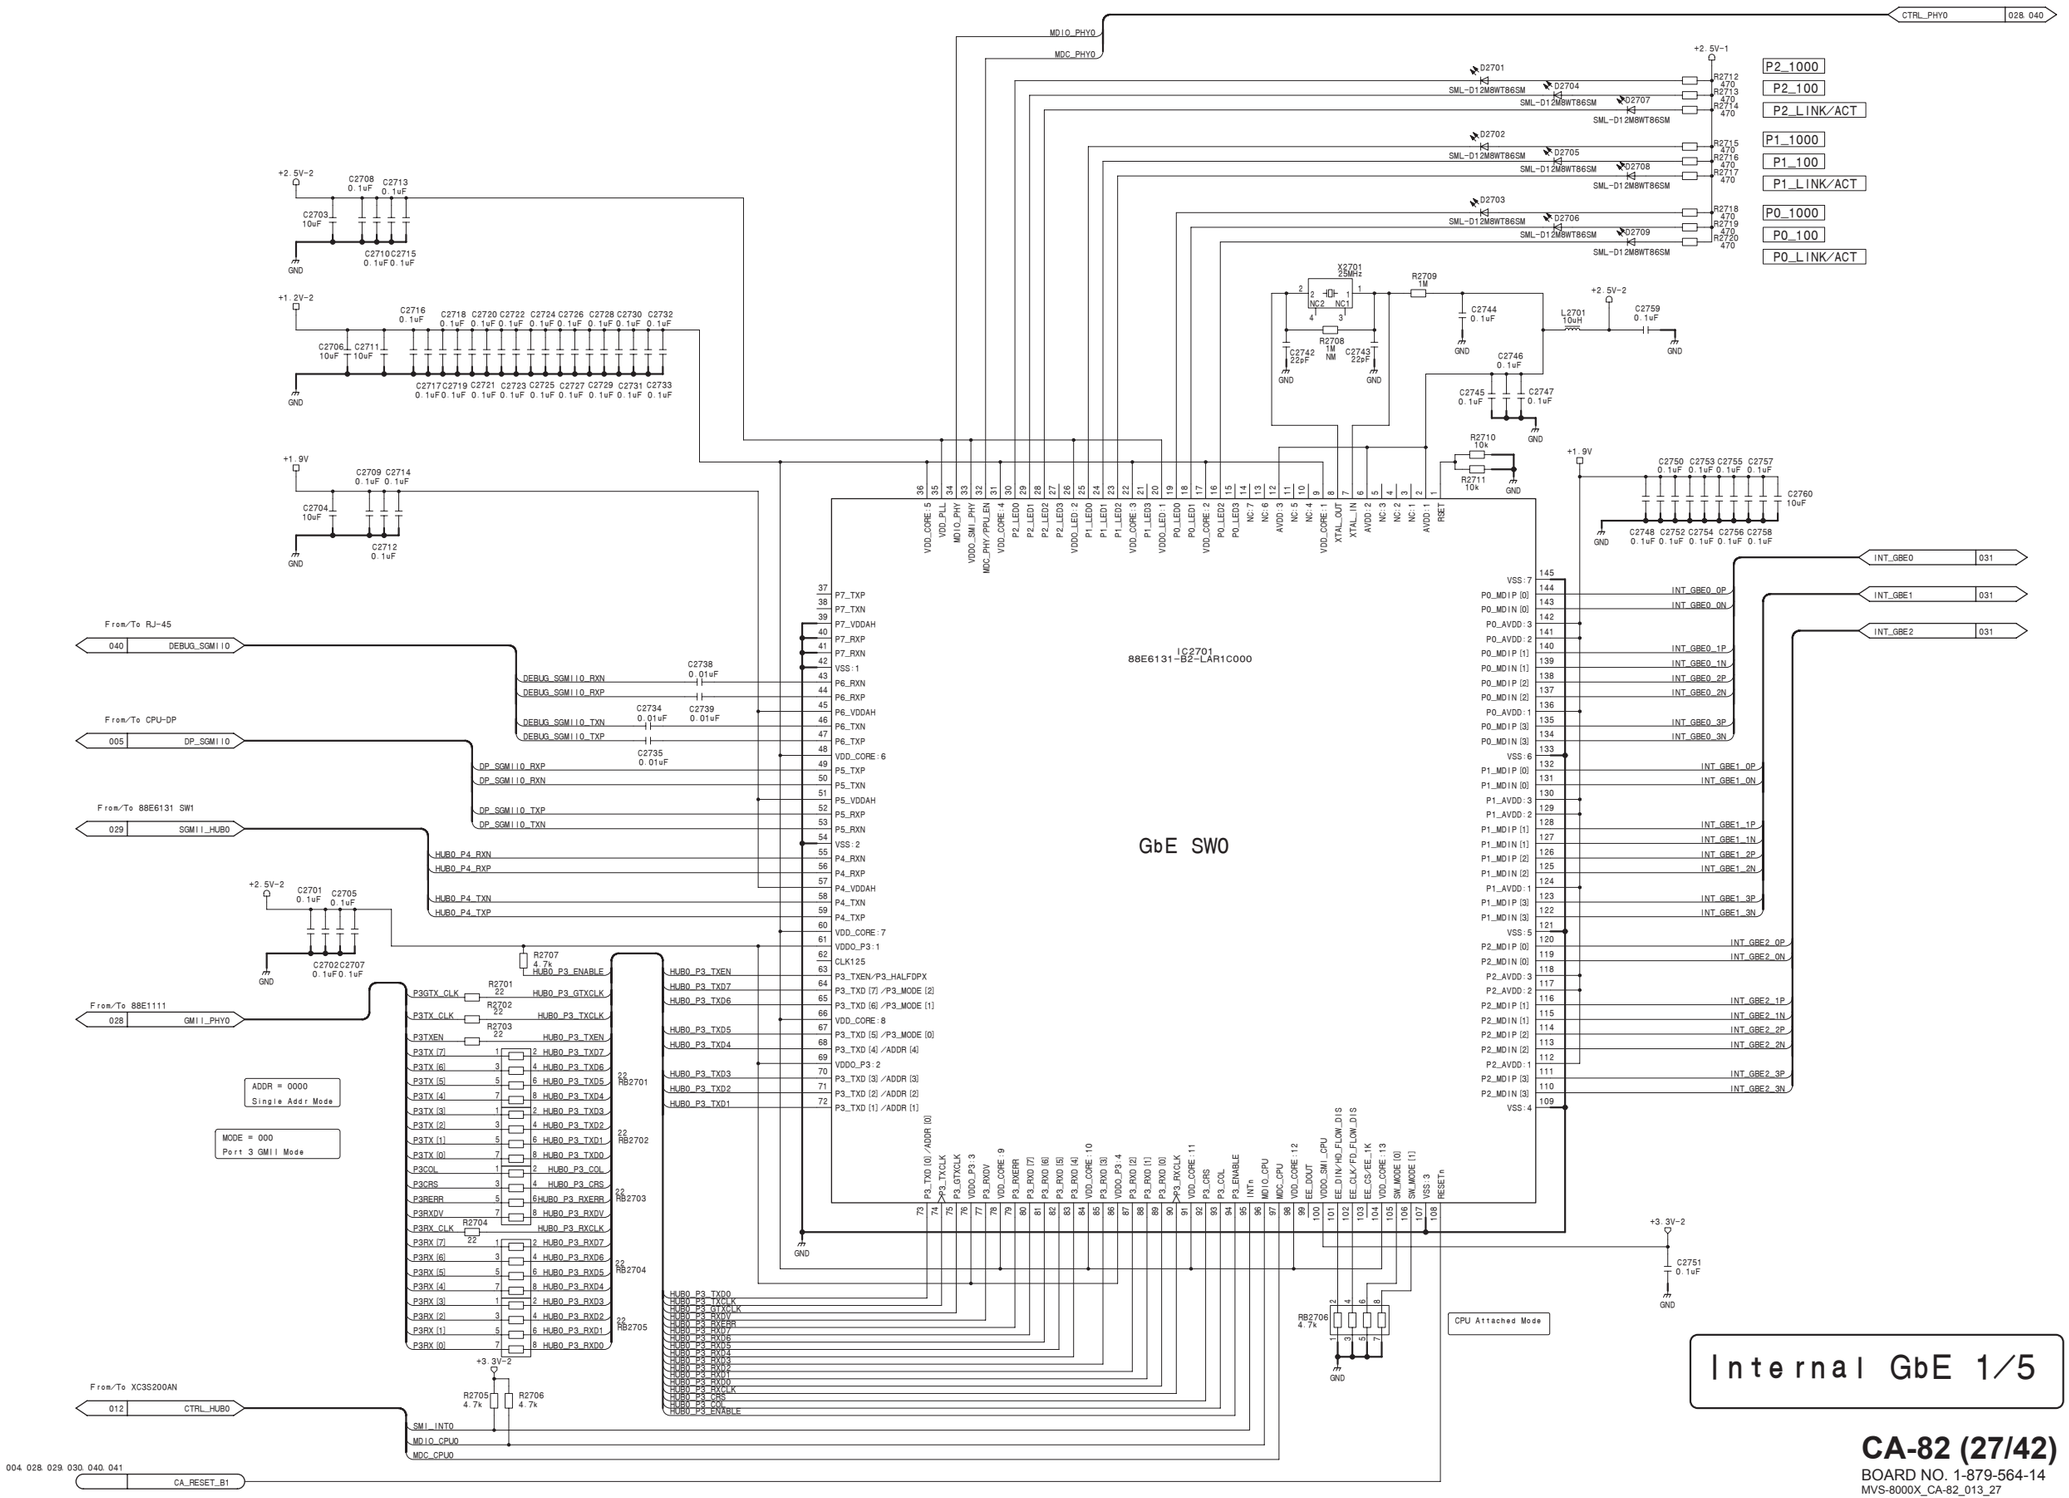

CA-82 (27/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_27

CA-82 (28/42)
SUFFIX: -14

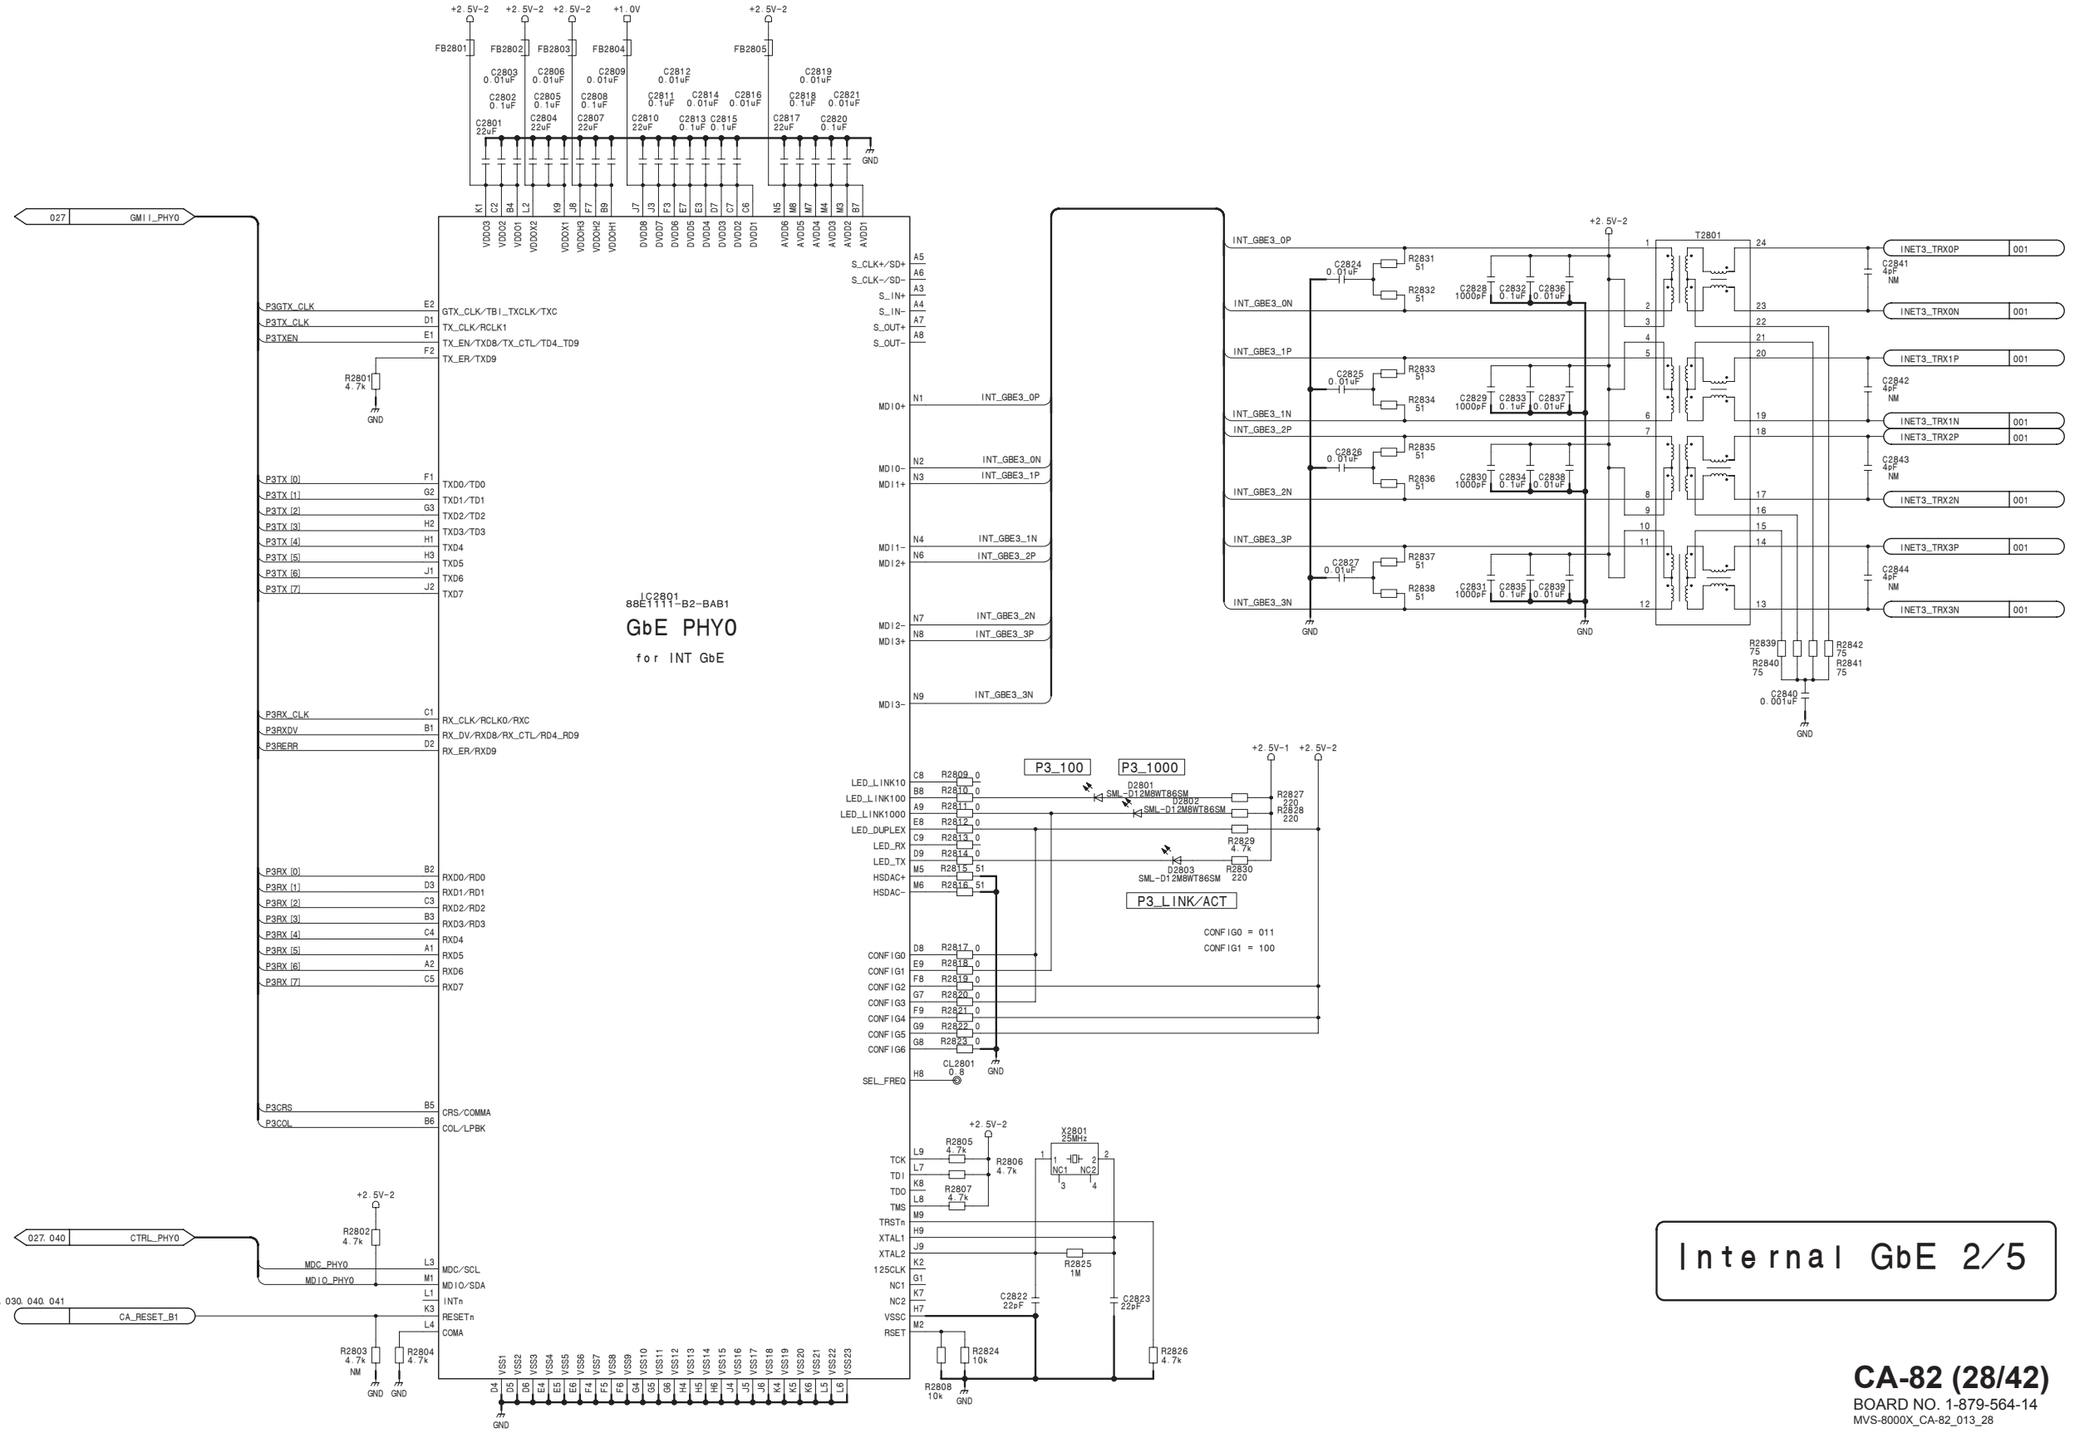

Internal GbE 2/5

CA-82 (28/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_28

CA-82 (29/42)
SUFFIX: -14

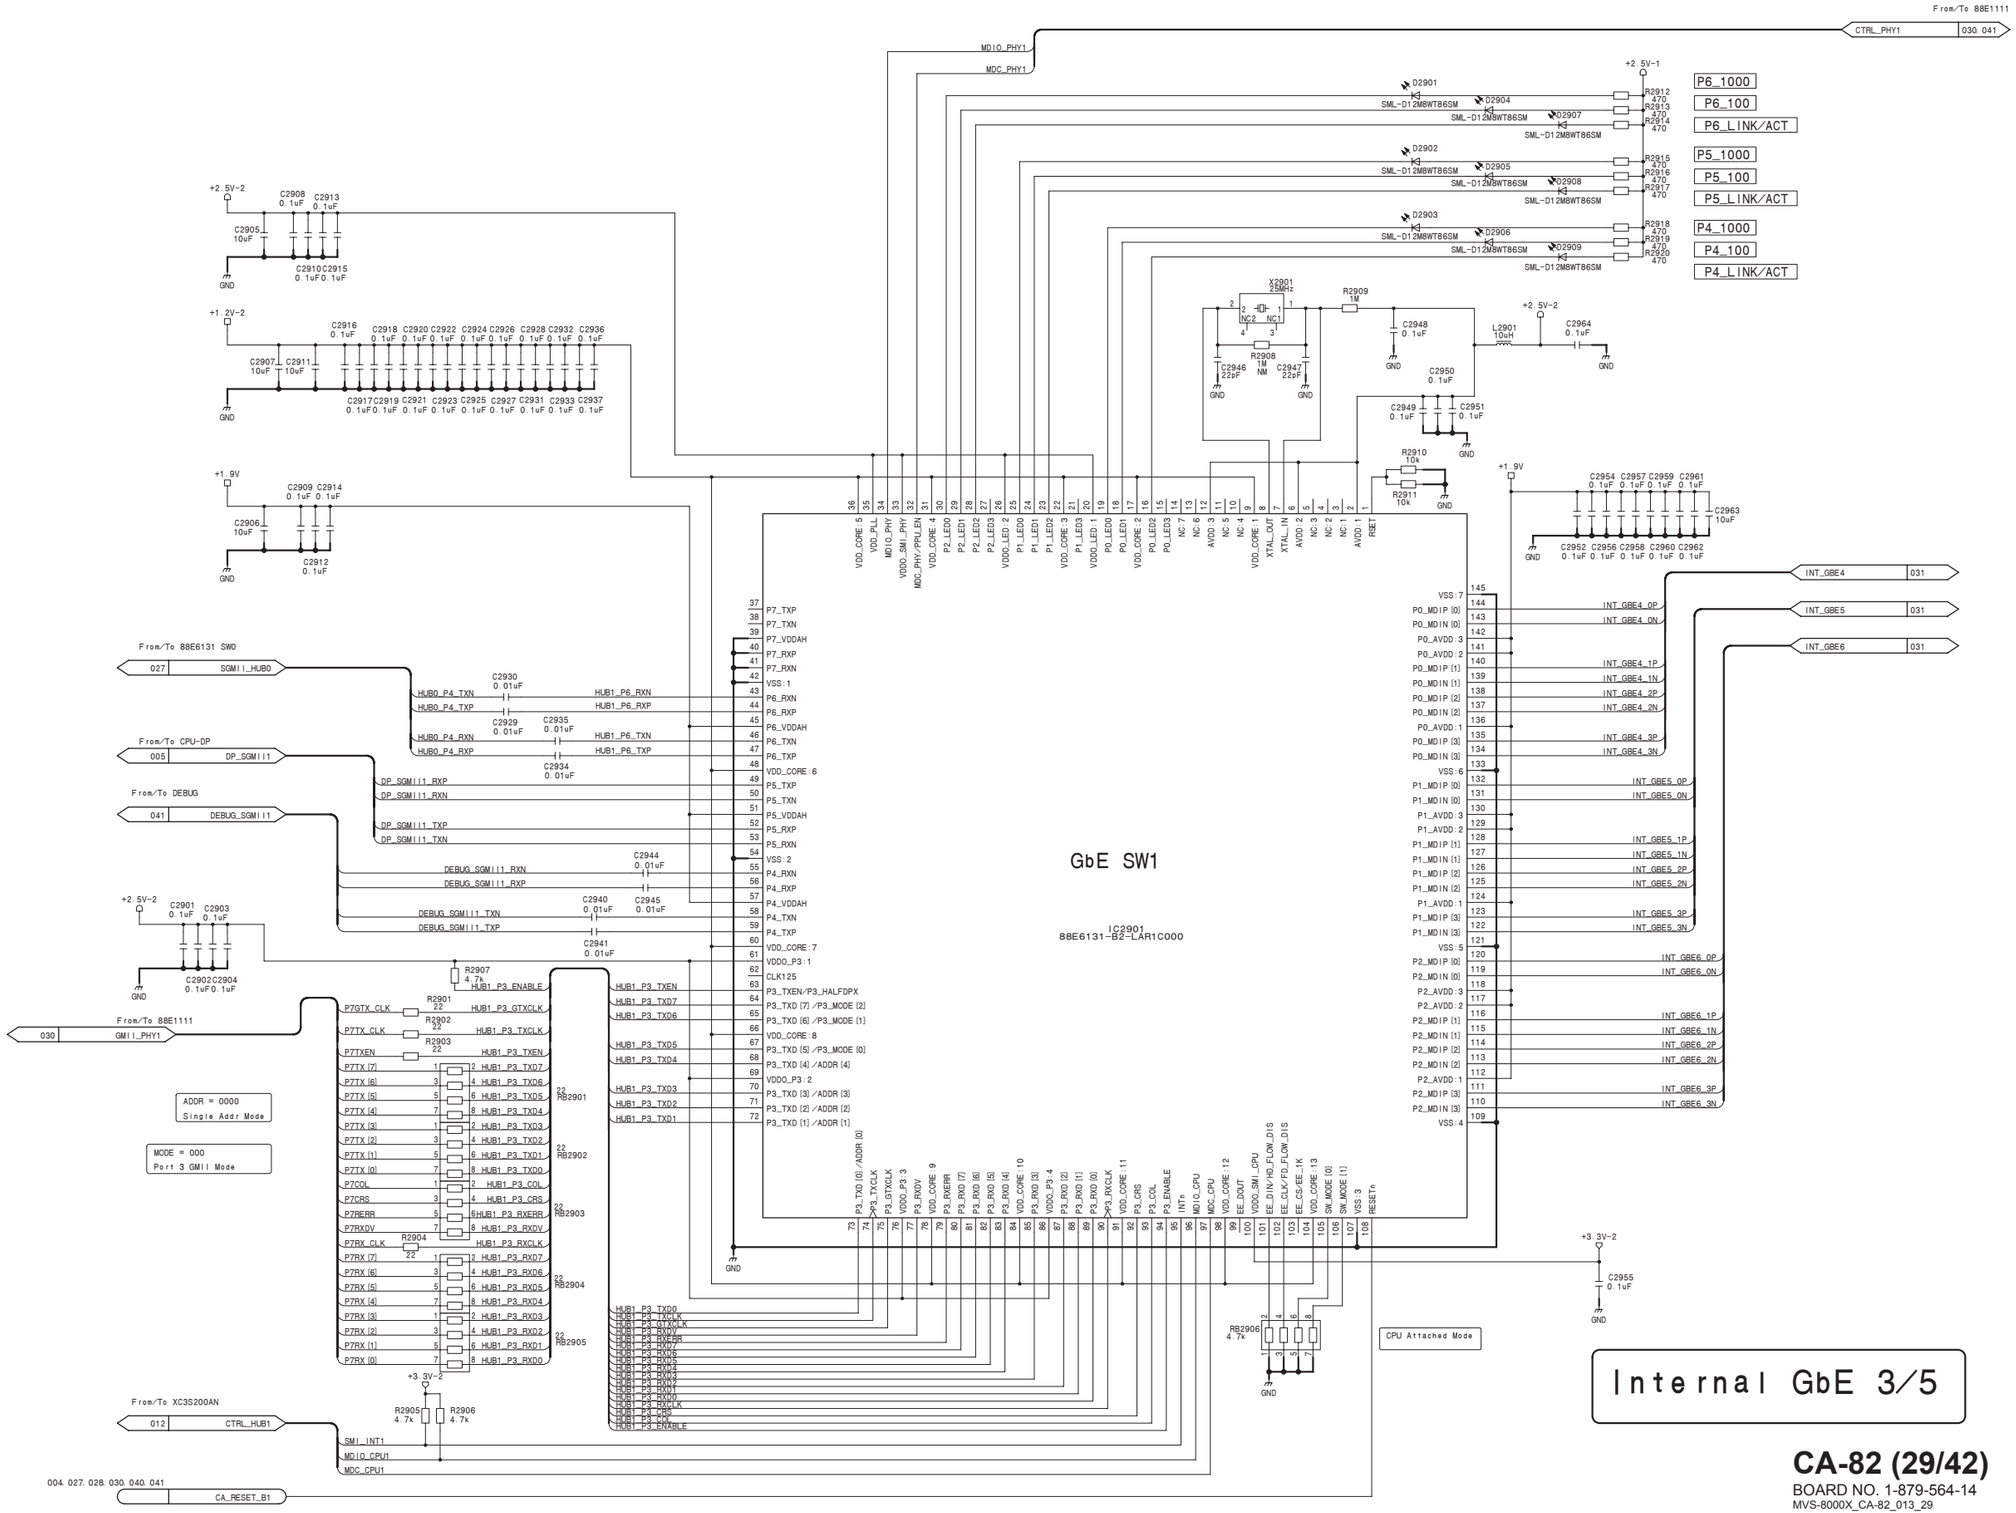

CA-82 (29/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_29

CA-82 (30/42)
SUFFIX: -14

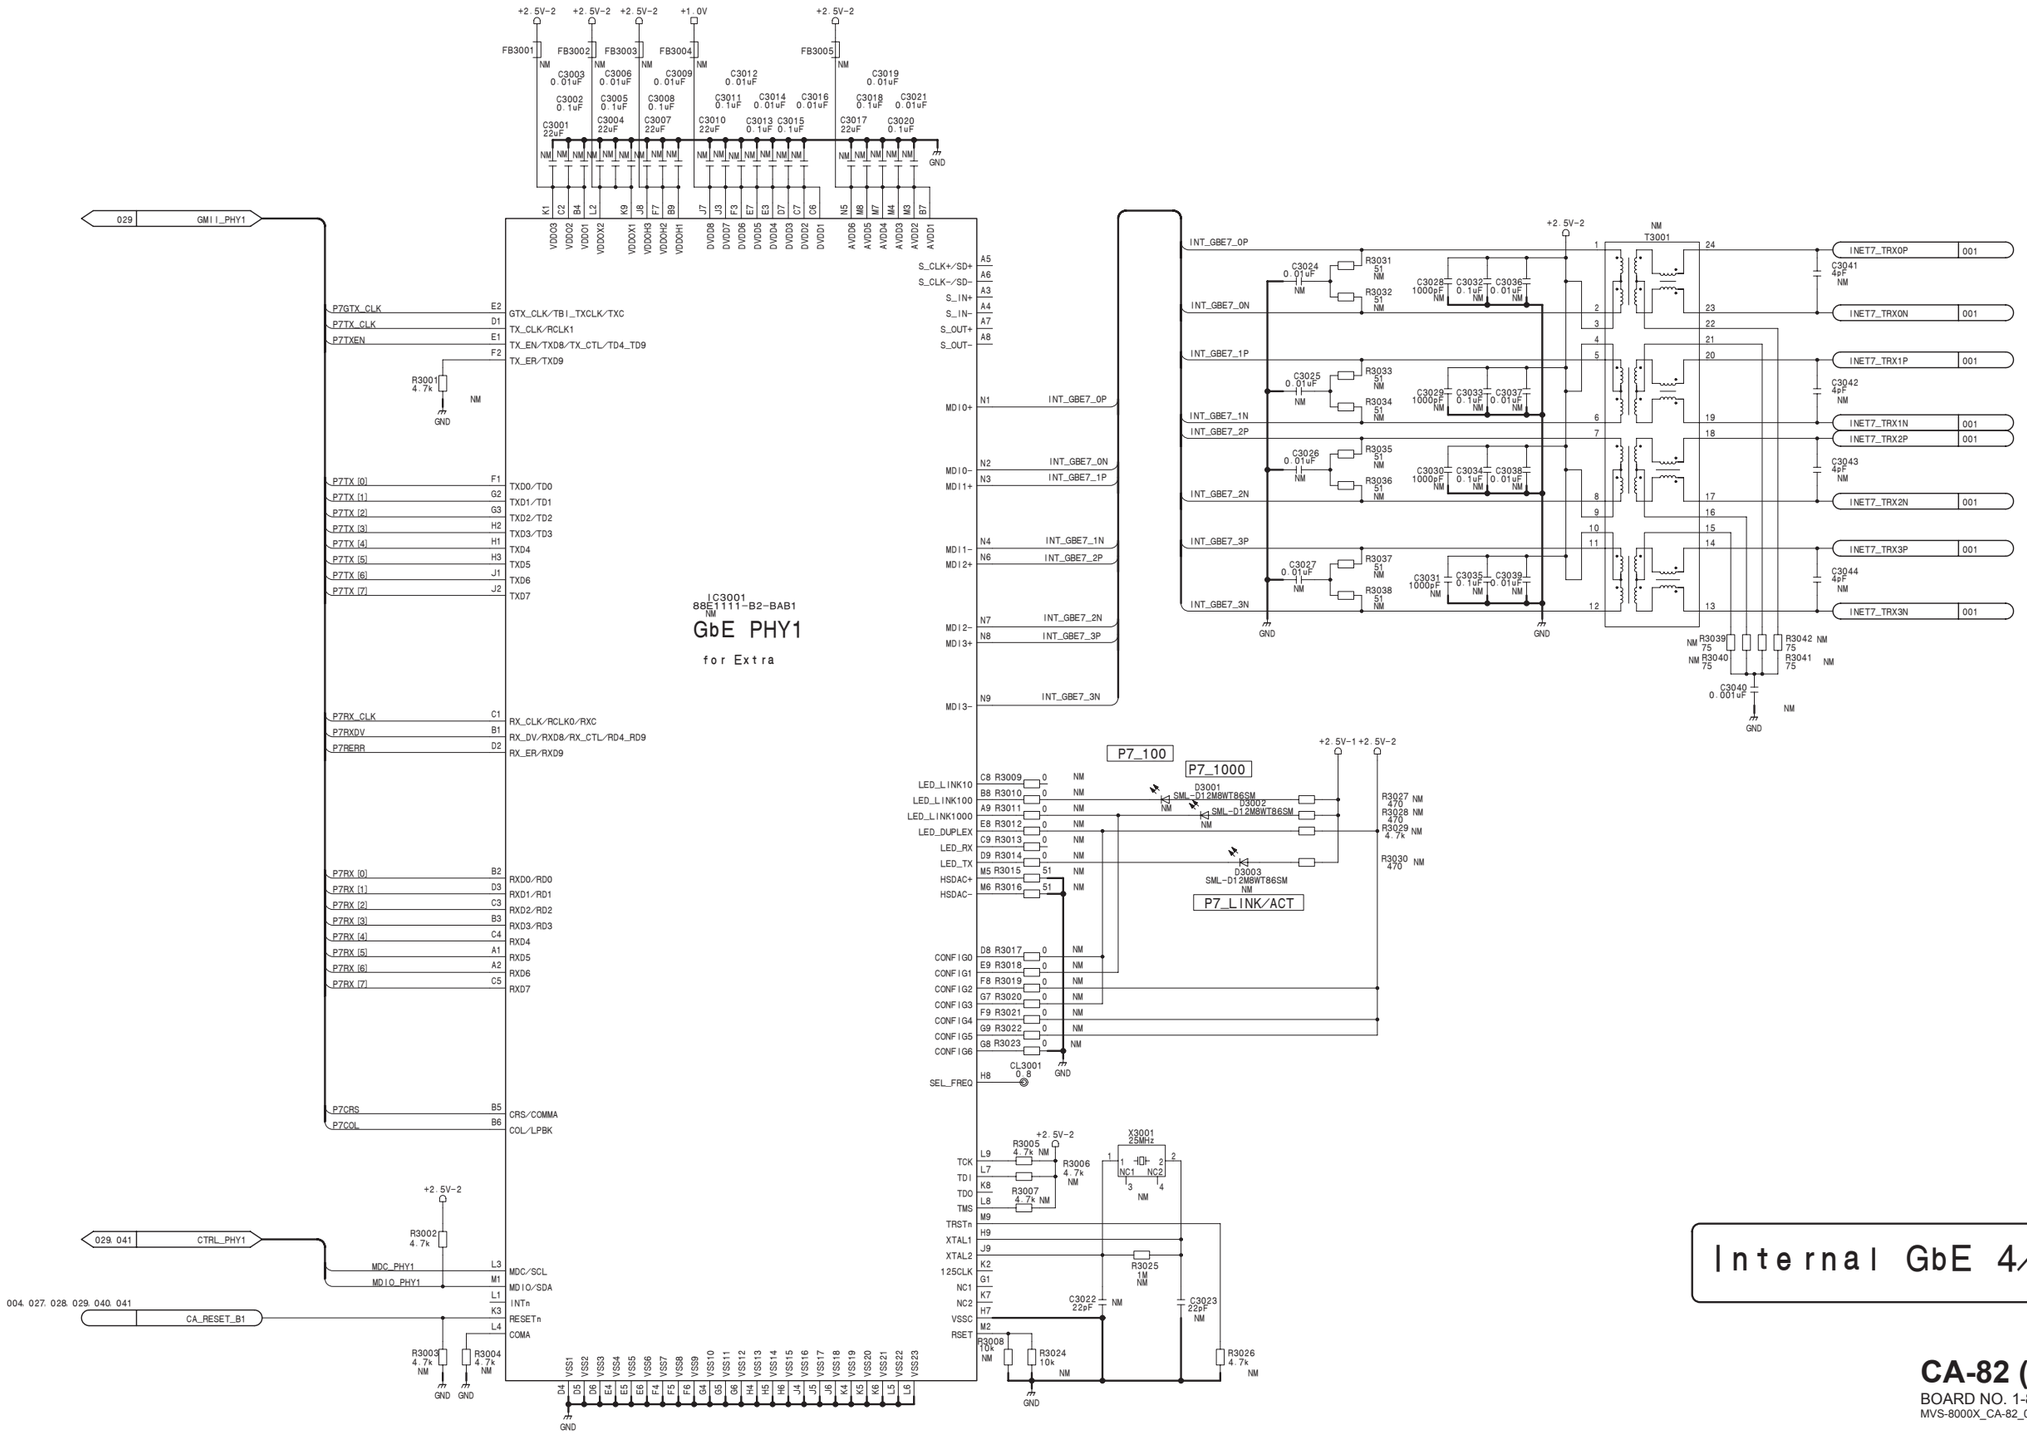

Internal GbE 4/5

CA-82 (30/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_30

CA-82 (31/42)
SUFFIX: -14

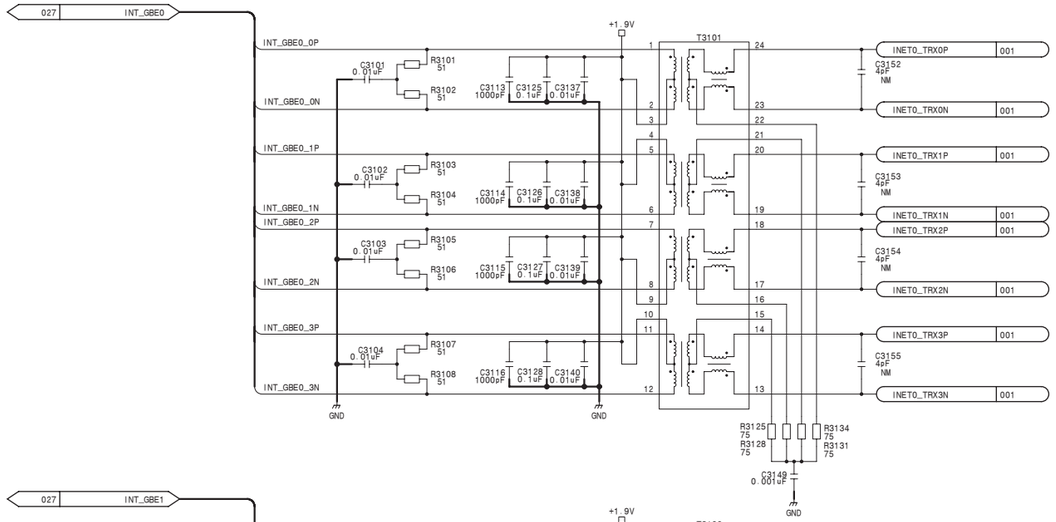

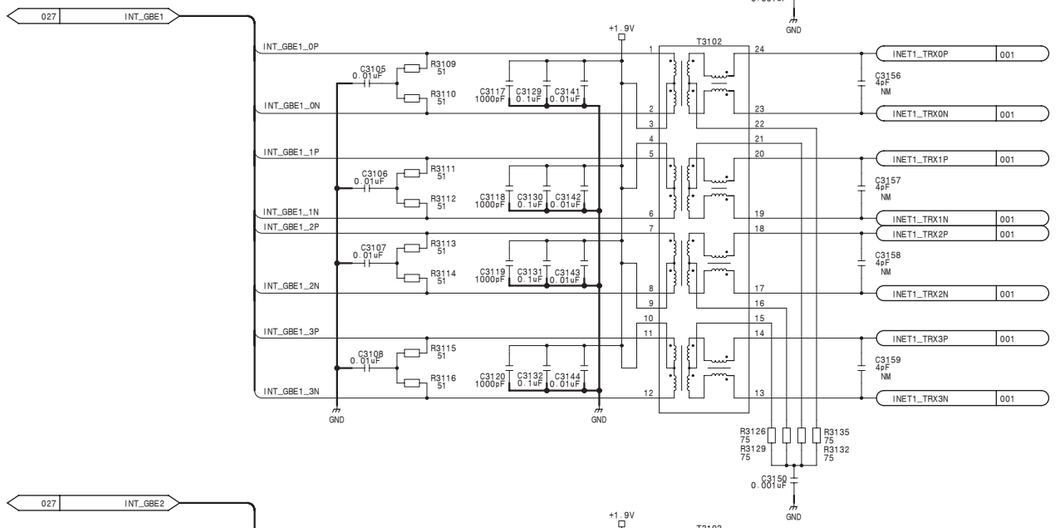

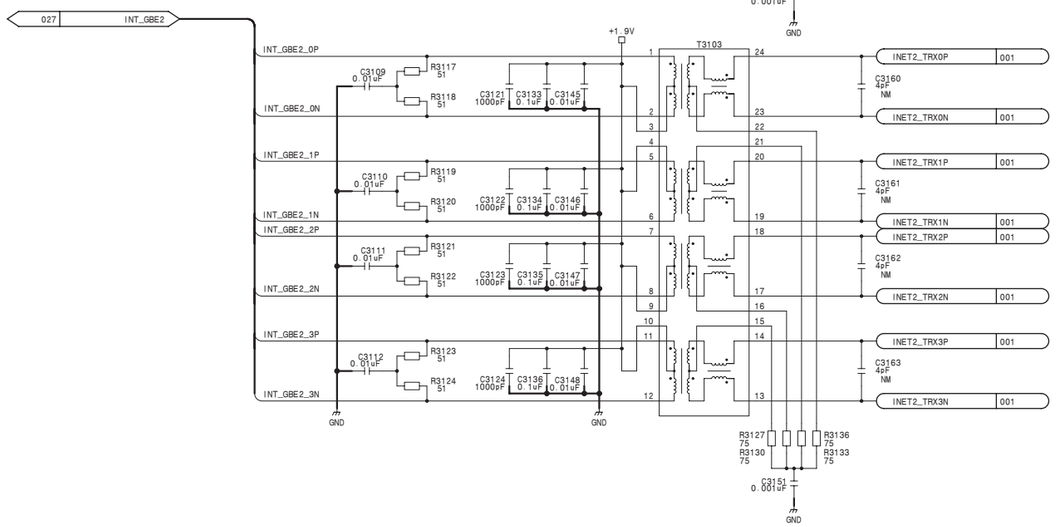

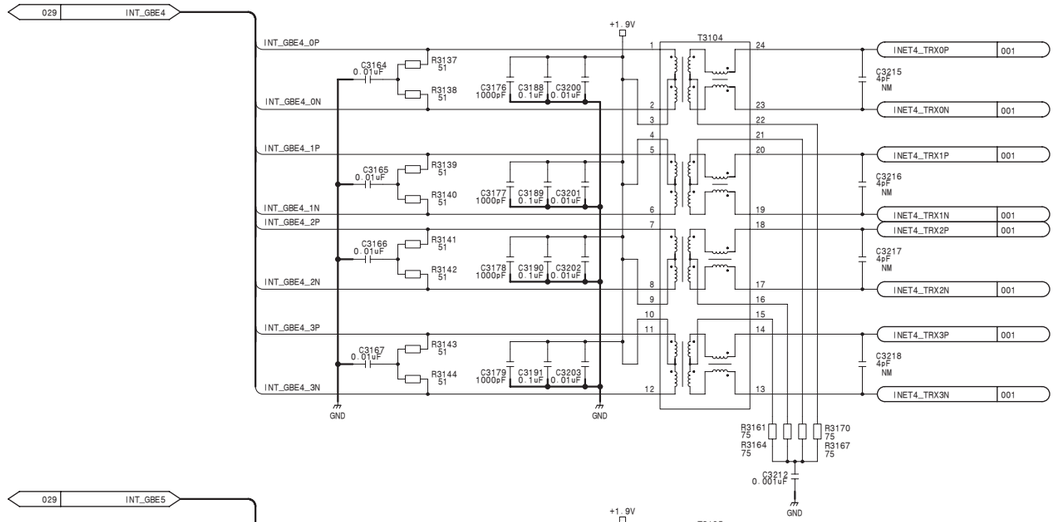

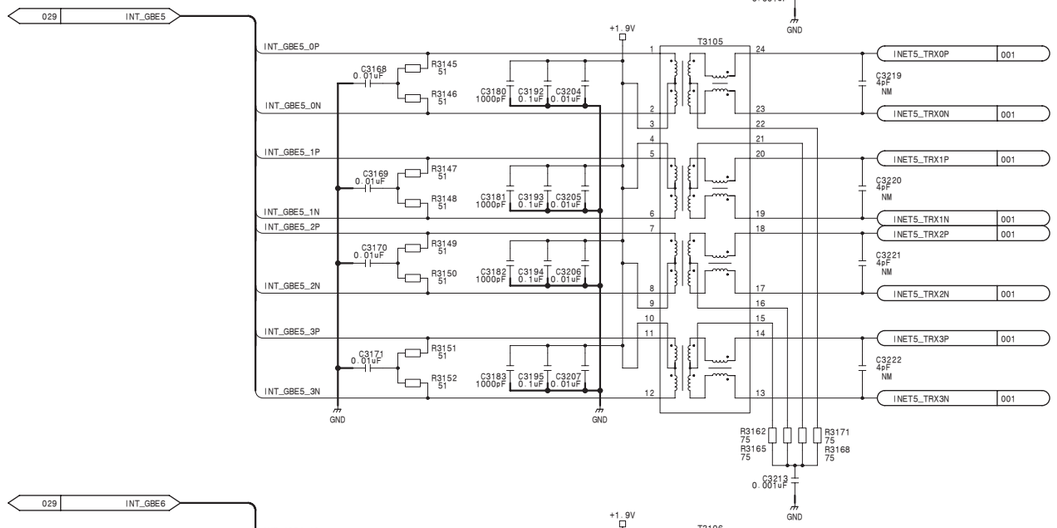

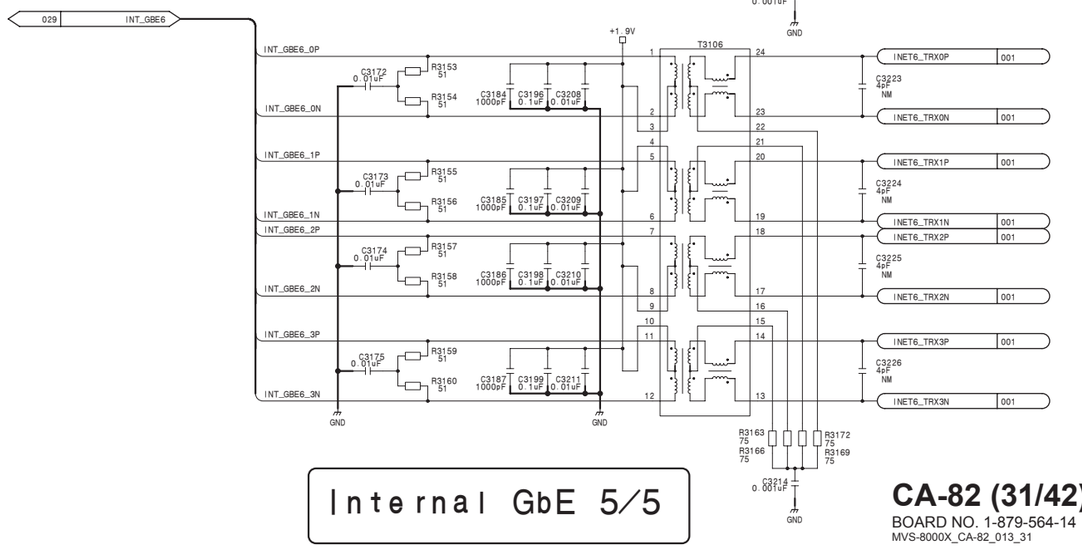

Internal GbE 5/5

CA-82 (31/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_31

CA-82 (32/42)
SUFFIX: -14

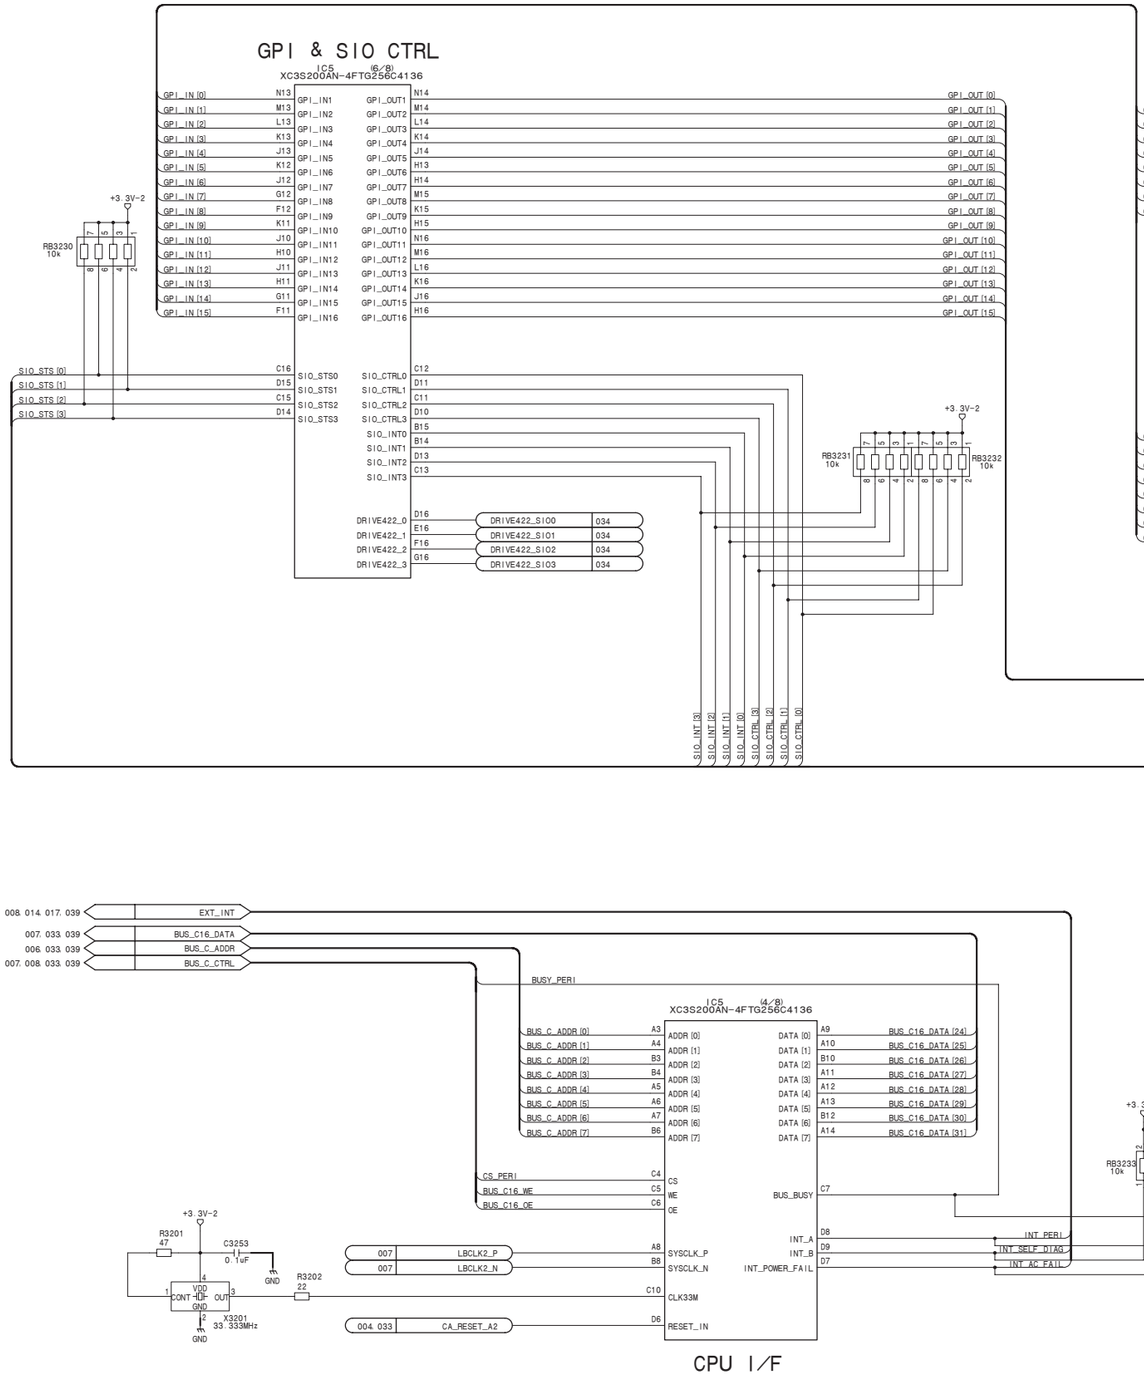

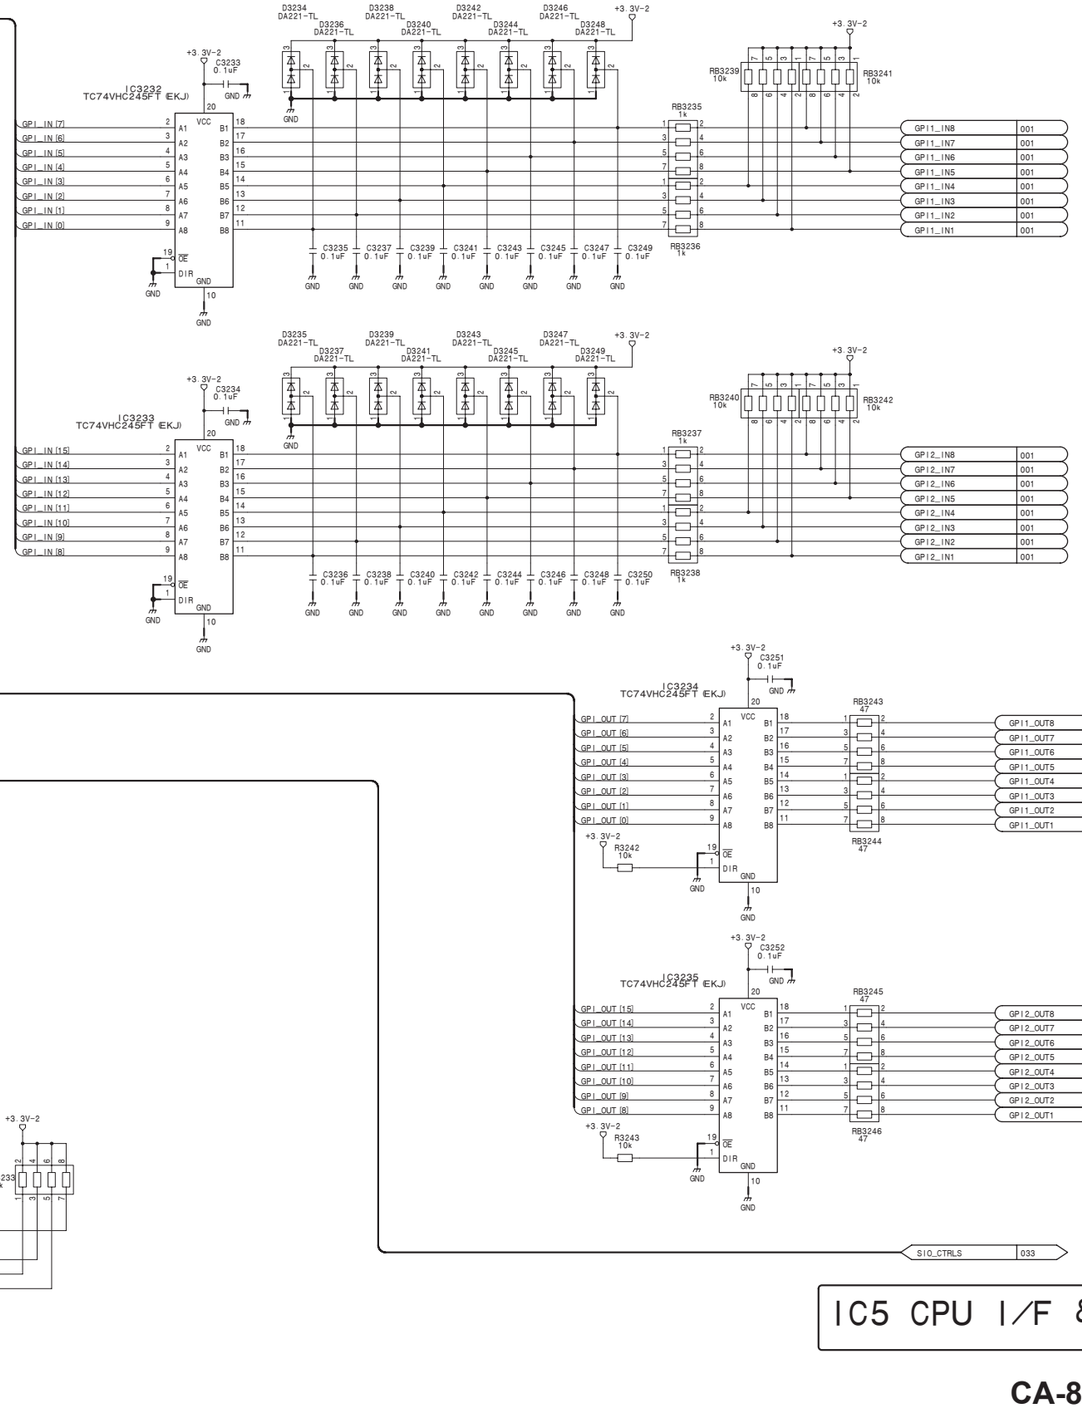

IC5 CPU I/F & GPI

CA-82 (32/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_32

CA-82 (33/42)
SUFFIX: -14

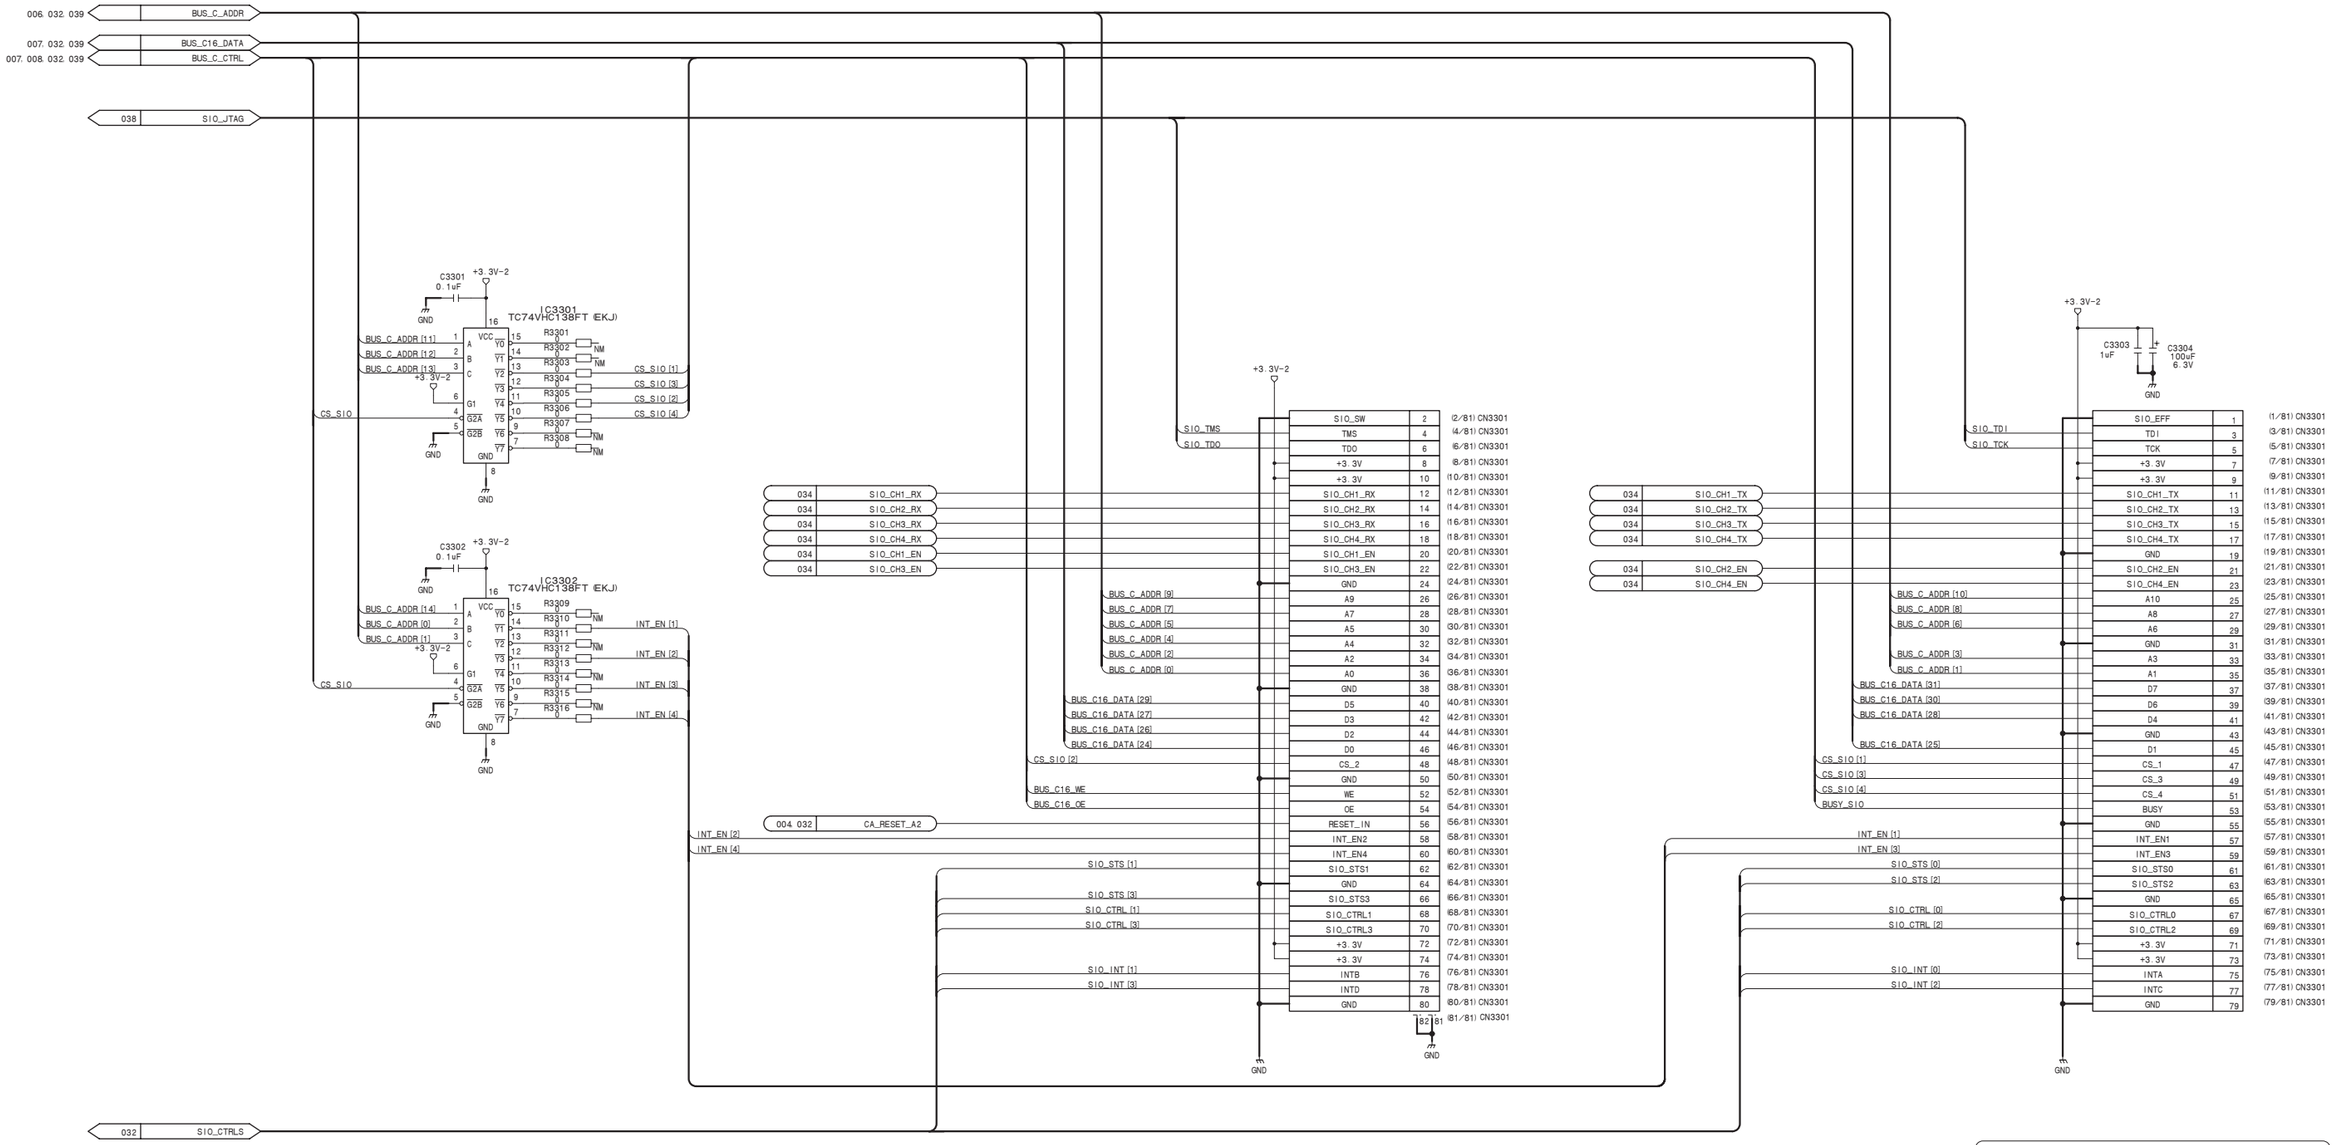

SIO-26 CONNECTOR

CA-82 (33/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_33

CA-82 (34/42)
SUFFIX: -14

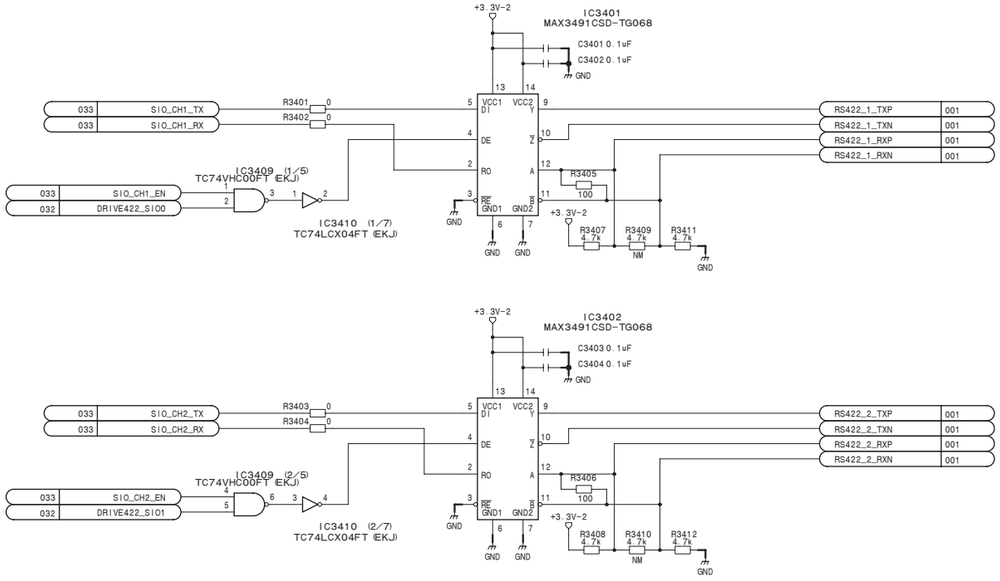

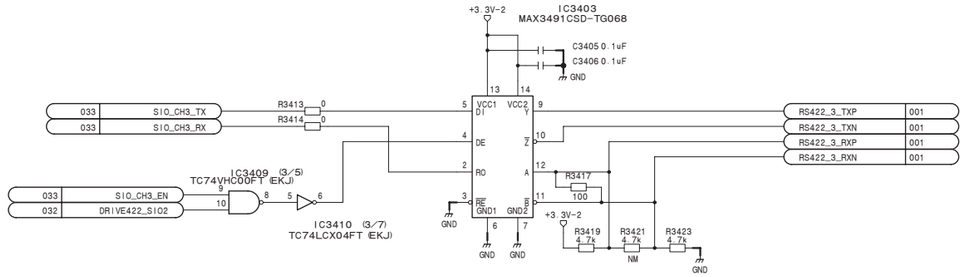

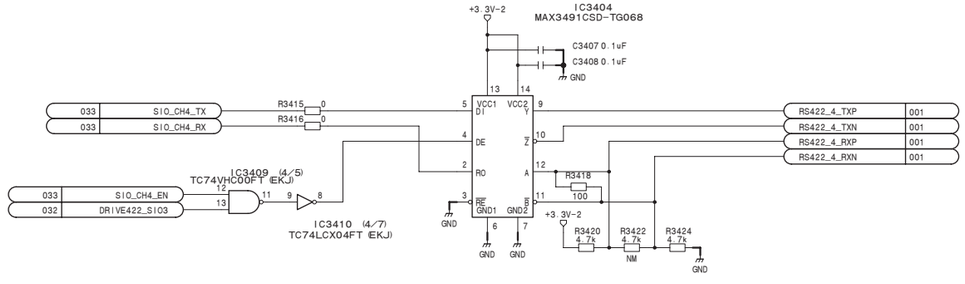

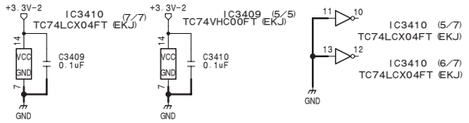

RS-422 Driver

CA-82 (34/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_34

CA-82 (35/42)
SUFFIX: -14

FAN CTRL
Board Info

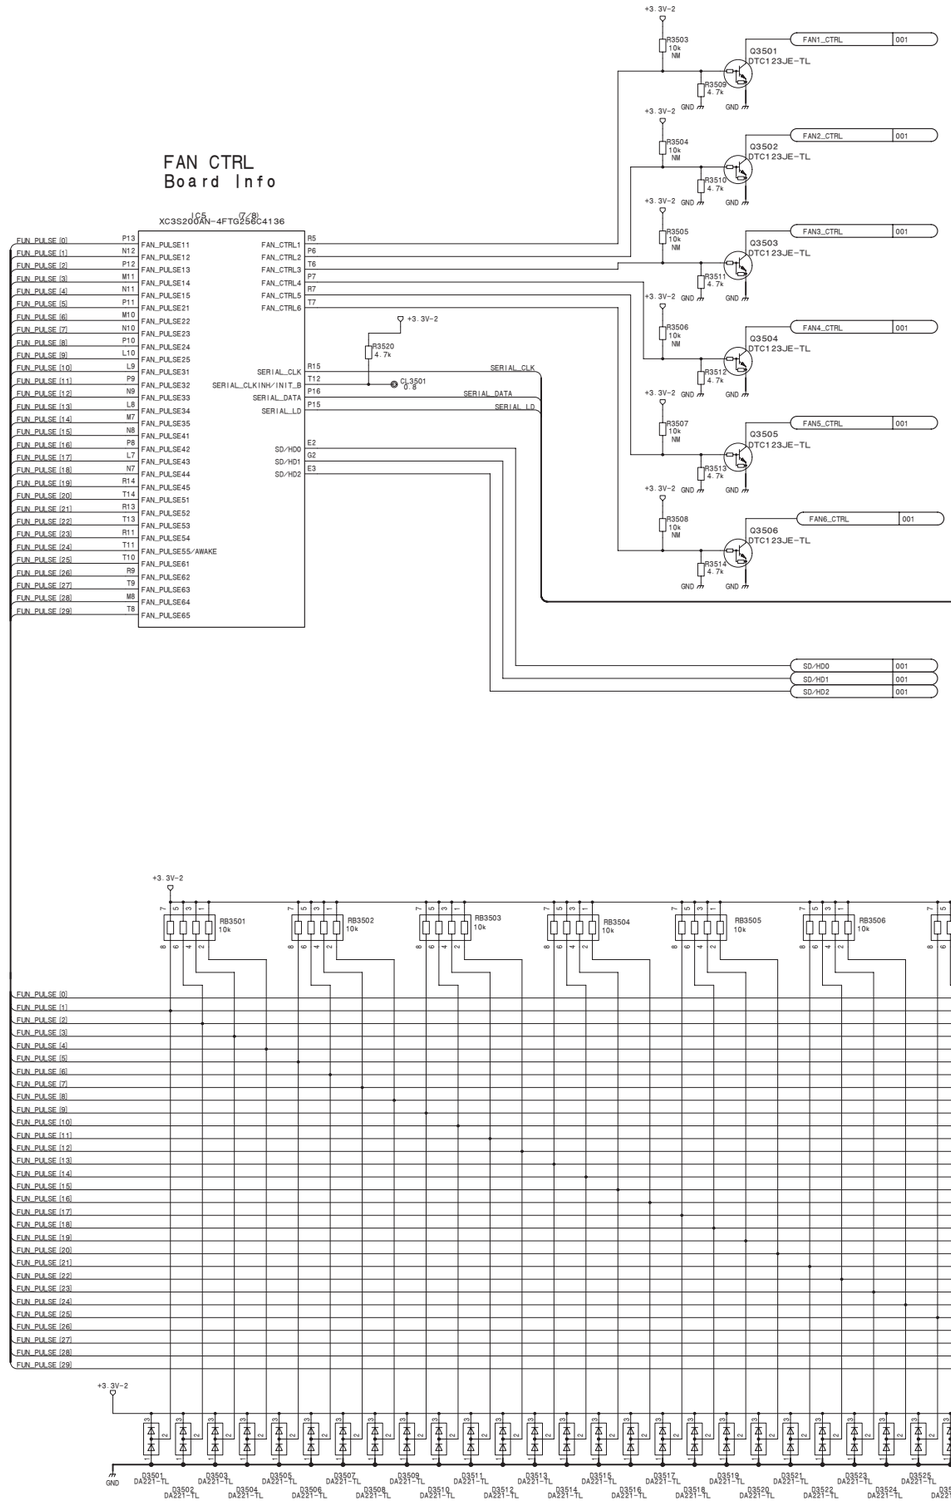

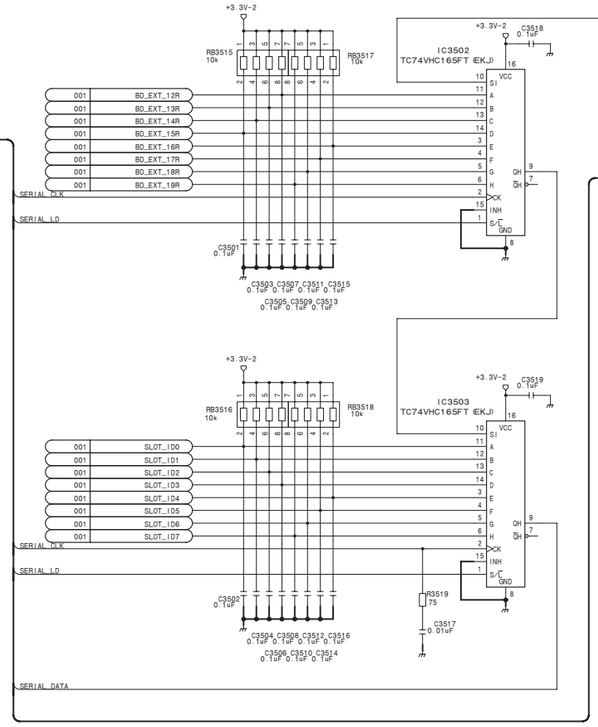

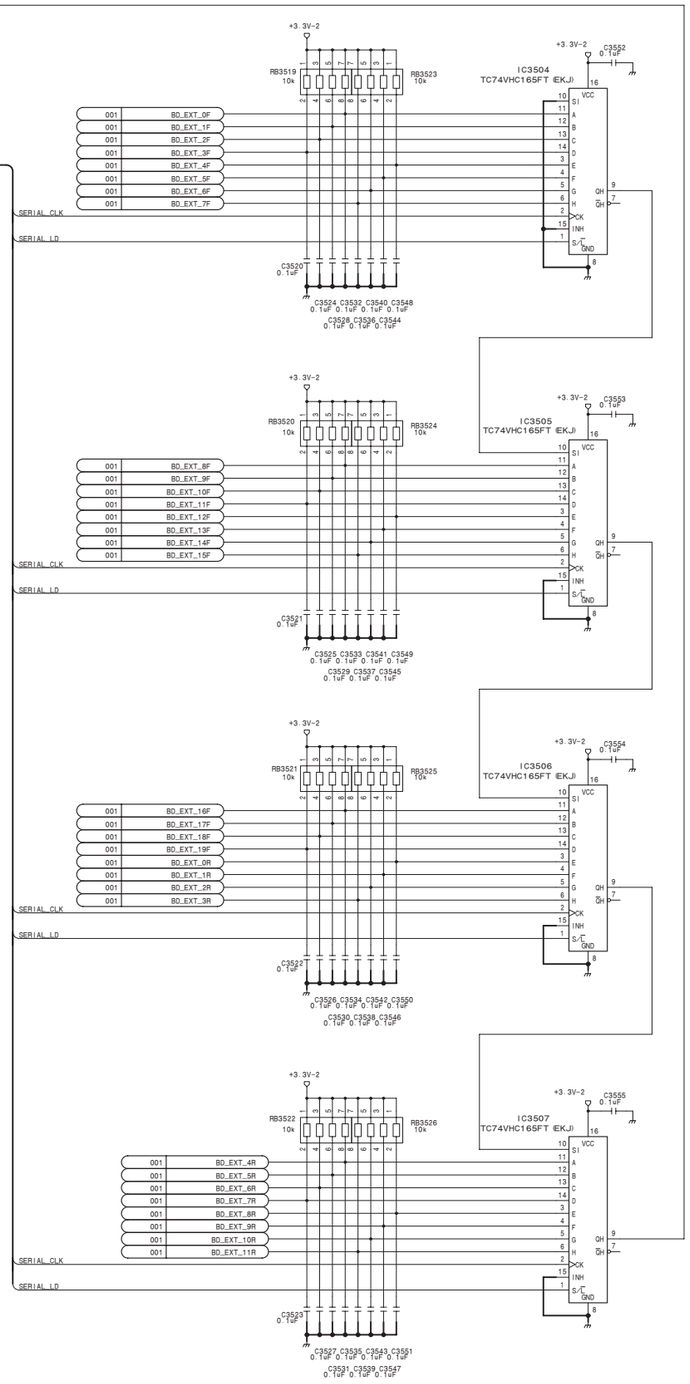

SELF DIAG

CA-82 (35/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_35

CA-82 (36/42)
SUFFIX: -14

12V monitoring

Vdet = 1.23 * (R1+R2) /R2
= 8.1V

042 POWER_STATUS_INV

IC5 (5/8) XC3S200AN-4FTG256C4136

PS1_AC_ERR_INV PS2_AC_ERR_INV PS3_AC_ERR_INV PS4_AC_ERR_INV
PS1_DC_ERR_INV PS2_DC_ERR_INV PS3_DC_ERR_INV PS4_DC_ERR_INV
PS1_FAN_ERR_INV PS2_FAN_ERR_INV PS3_FAN_ERR_INV PS4_FAN_ERR_INV
PS1_THR_ERR_INV PS2_THR_ERR_INV PS3_THR_ERR_INV PS4_THR_ERR_INV
PS1_EXIST_INV PS2_EXIST_INV PS3_EXIST_INV PS4_EXIST_INV

AC_ERR0 AC_ERR1 AC_ERR2 AC_ERR3
DC_ERR0 DC_ERR1 DC_ERR2 DC_ERR3
PFAN_ERR0 PFAN_ERR1 PFAN_ERR2 PFAN_ERR3
THR_ERR0 THR_ERR1 THR_ERR2 THR_ERR3
PS_EXIST0 PS_EXIST1 PS_EXIST2 PS_EXIST3

EMG_12V
DC_ENBL0 DC_ENBL1
FATAL_POWER_DET ALL_POWER_DET
B_LED0 B_LED1 B_LED2 B_LED3

DCDC_GD0 DCDC_GD1 DCDC_GD2 DCDC_GD3 DCDC_GD4
PWR_GD0 PWR_GD1 PWR_GD2 PWR_GD3
DET_POWER0 DET_POWER1 DET_POWER2 DET_POWER3 DET_POWER4 DET_POWER5 DET_POWER6 DET_POWER7 DET_POWER8 DET_POWER9 DET_POWER10
POW_SEQ0 POW_SEQ1
FUSE+12V

POWER_ON0 POWER_ON1 POWER_ON2 POWER_ON3 POWER_ON4 POWER_ON5 POWER_ON6

002 DCDC_GD
003 PWR_GD
001 POW_SEQ0
001 POW_SEQ1
001 FUSE+12V

R3607 0
CL3601 0.8
CL3602 0.8
CL3603 0.8
CL3608 0.8

R3611 10k
R3612 47k NM
R3613 2.2k
R3614 10k
R3615 4.7k
R3616 0
R3617 10k
C3634 0.1uF NM
C3635 10uF
C3636 0.22uF

Q3602 DTC123JE-TL
Q3607 DTC123JE-TL
Q3610 DTC123JE-TL
Q3612 DTC123JE-TL
Q3611 DTC123JE-TL

IC3603 MB3771PF-ER
VCC VSA VSB/RESTN OUTC VSC Cr RES GND

DC_ENBL0 001
DC_ENBL1 001
FATAL_POWER_DET 004
ALL_POWER_DET 004

R3620 10k
R3621 10k
R3618 10k NM
R3619 10k NM

Q3601 DTC123JE-TL NM
Q3603 DTC123JE-TL
Q3604 DTC123JE-TL
Q3605 DTC123JE-TL
Q3606 DTC123JE-TL
Q3608 DTC123JE-TL
Q3609 DTC123JE-TL
Q3613 DTC123JE-TL
Q3614 DTC123JE-TL

RB3607 10k
RB3608 1k NM
RB3611 10k
R3622 10k

PWR_EN0 PWR_EN1 PWR_EN2 PWR_EN3 PWR_EN4
PWR_EN 002 003

PS1_B_LED 001
PS2_B_LED 001
PS3_B_LED 001
PS4_B_LED 001

RB3601 10k
R3643 10k
R3609 10k
C3653 0.1uF
C3604 0.1uF 16V
C3606 0.1uF 16V

Q3616 DTA123JE-TL
Q3615 DTC123JE-TL

IC5 (1/8) XC3S200AN-4FTG256C4136
GND1 GND2 GND3 GND4 GND5 GND6 GND7 GND8 GND9 GND10 GND11 GND12 GND13 GND14
GND15 GND16 GND17 GND18 GND19 GND20 GND21 GND22 GND23 GND24 GND25 GND26 GND27 GND28

C3623 10uF 6.3V
C3624 10uF 6.3V
C3625 10uF 6.3V

IC5 (2/8) XC3S200AN-4FTG256C4136
VCCO_0_1 VCCO_0_2 VCCO_0_3 VCCO_0_4 VCCO_1_1 VCCO_1_2 VCCO_1_3 VCCO_1_4 VCCO_2_1 VCCO_2_2 VCCO_2_3 VCCO_2_4 VCCO_3_1 VCCO_3_2 VCCO_3_3 VCCO_3_4
VCCAUX1 VCCAUX2 VCCAUX3 VCCAUX4
VCCINT1 VCCINT2 VCCINT3 VCCINT4 VCCINT5 VCCINT6

C3626 0.1uF
C3627 0.01uF
C3628 0.1uF
C3629 0.01uF
C3630 0.1uF
C3631 0.01uF
C3632 0.1uF
C3633 0.01uF
C3637 0.1uF
C3638 0.01uF
C3639 0.1uF
C3640 0.01uF
C3641 0.01uF
C3642 0.1uF
C3643 0.01uF
C3644 0.1uF
C3645 0.01uF
C3646 0.1uF
C3647 10uF 6.3V
C3648 10uF 6.3V
C3649 10uF 6.3V
C3650 10uF 6.3V

+1.2V-1

IC5 (3/8) XC3S200AN-4FTG256C4136
M0 M1 M2 VS0 VS1 VS2 PROG_B SUSPEND
IP_0_3 IP_0_4 IP_0_5 IP_0_6 IP_0_2 IP_0_7/VREF_0_4 IO_L05P_2 IO_L06P_2/D7
DONE
POWER_LED0 POWER_LED1 BCON_LED STATUS_LED0/PUDC_B STATUS_LED1
LED [0] LED [1] LED [2] LED [3]
CL [0] CL [1] CL [2] CL [3]

R3601 0 NM
R3603 0
R3605 0
R3625 0
R3627 0
R3629 0
R3632 0 NM
R3623 4.7k
R3602 0
R3604 0 NM
R3606 0 NM
R3626 0 NM
R3628 0 NM
R3630 0 NM
R3633 0
R3634 0 NM
R3644 10k
R3635 330
R3642 4.7k
R3636 4.7k

NV1_CONF_DONE 004

Conf Mode
Internal Master SPI
M[2:0] = 011
VS[2:0] = 111

C3651 0.01uF
C3652 0.1uF
RB3610 10k
RB3609 1k

IC3601 TC74VHC05FT (EKJ)

D3601 SML-D12M8WT86SM
D3602 SML-D12M8WT86SM
D3603 SML-D12M8WT86SM
D3604 SML-D12M8WT86SM
LED0 LED1 LED2 LED3 CS

D3605 SML-522MU8WT86PQ
D3606 SML412BC6TT86
D3607 SML-522MU8WT86PQ
R3637 1k
R3638 220
R3639 220
R3640 1k
R3641 220

POWER BCON STATUS

POWER SUPPLY CTRL
& CONFIG PIN

CA-82 (36/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_36

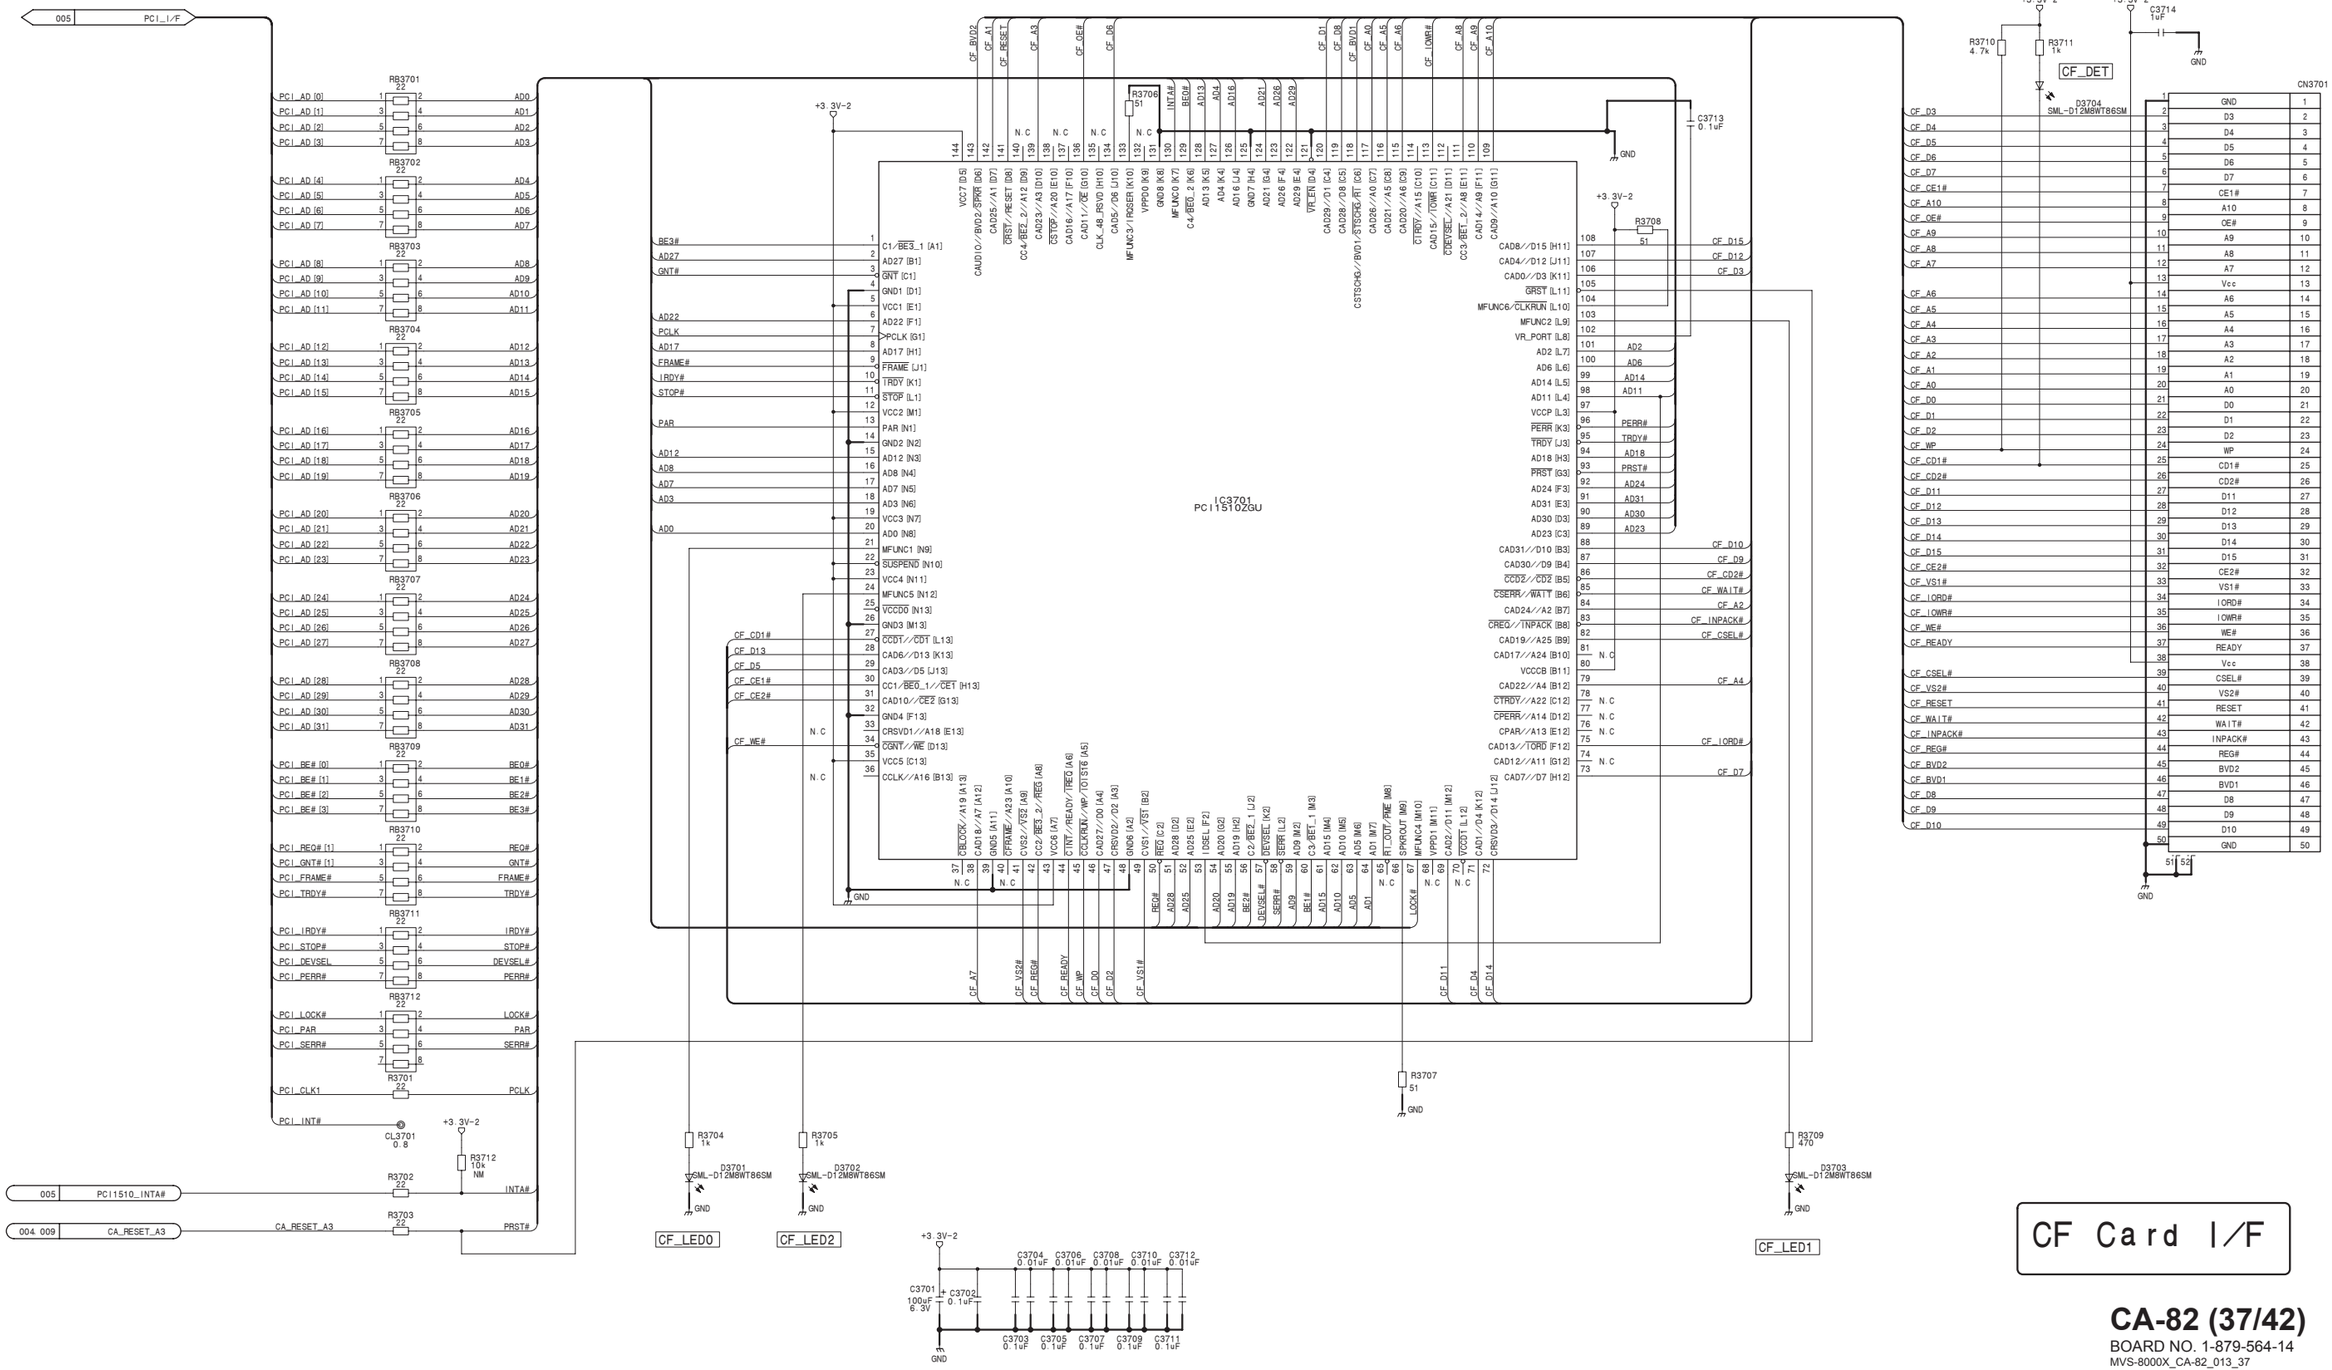

CF Card I/F

CA-82 (37/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_37

CA-82 (38/42)
SUFFIX: -14

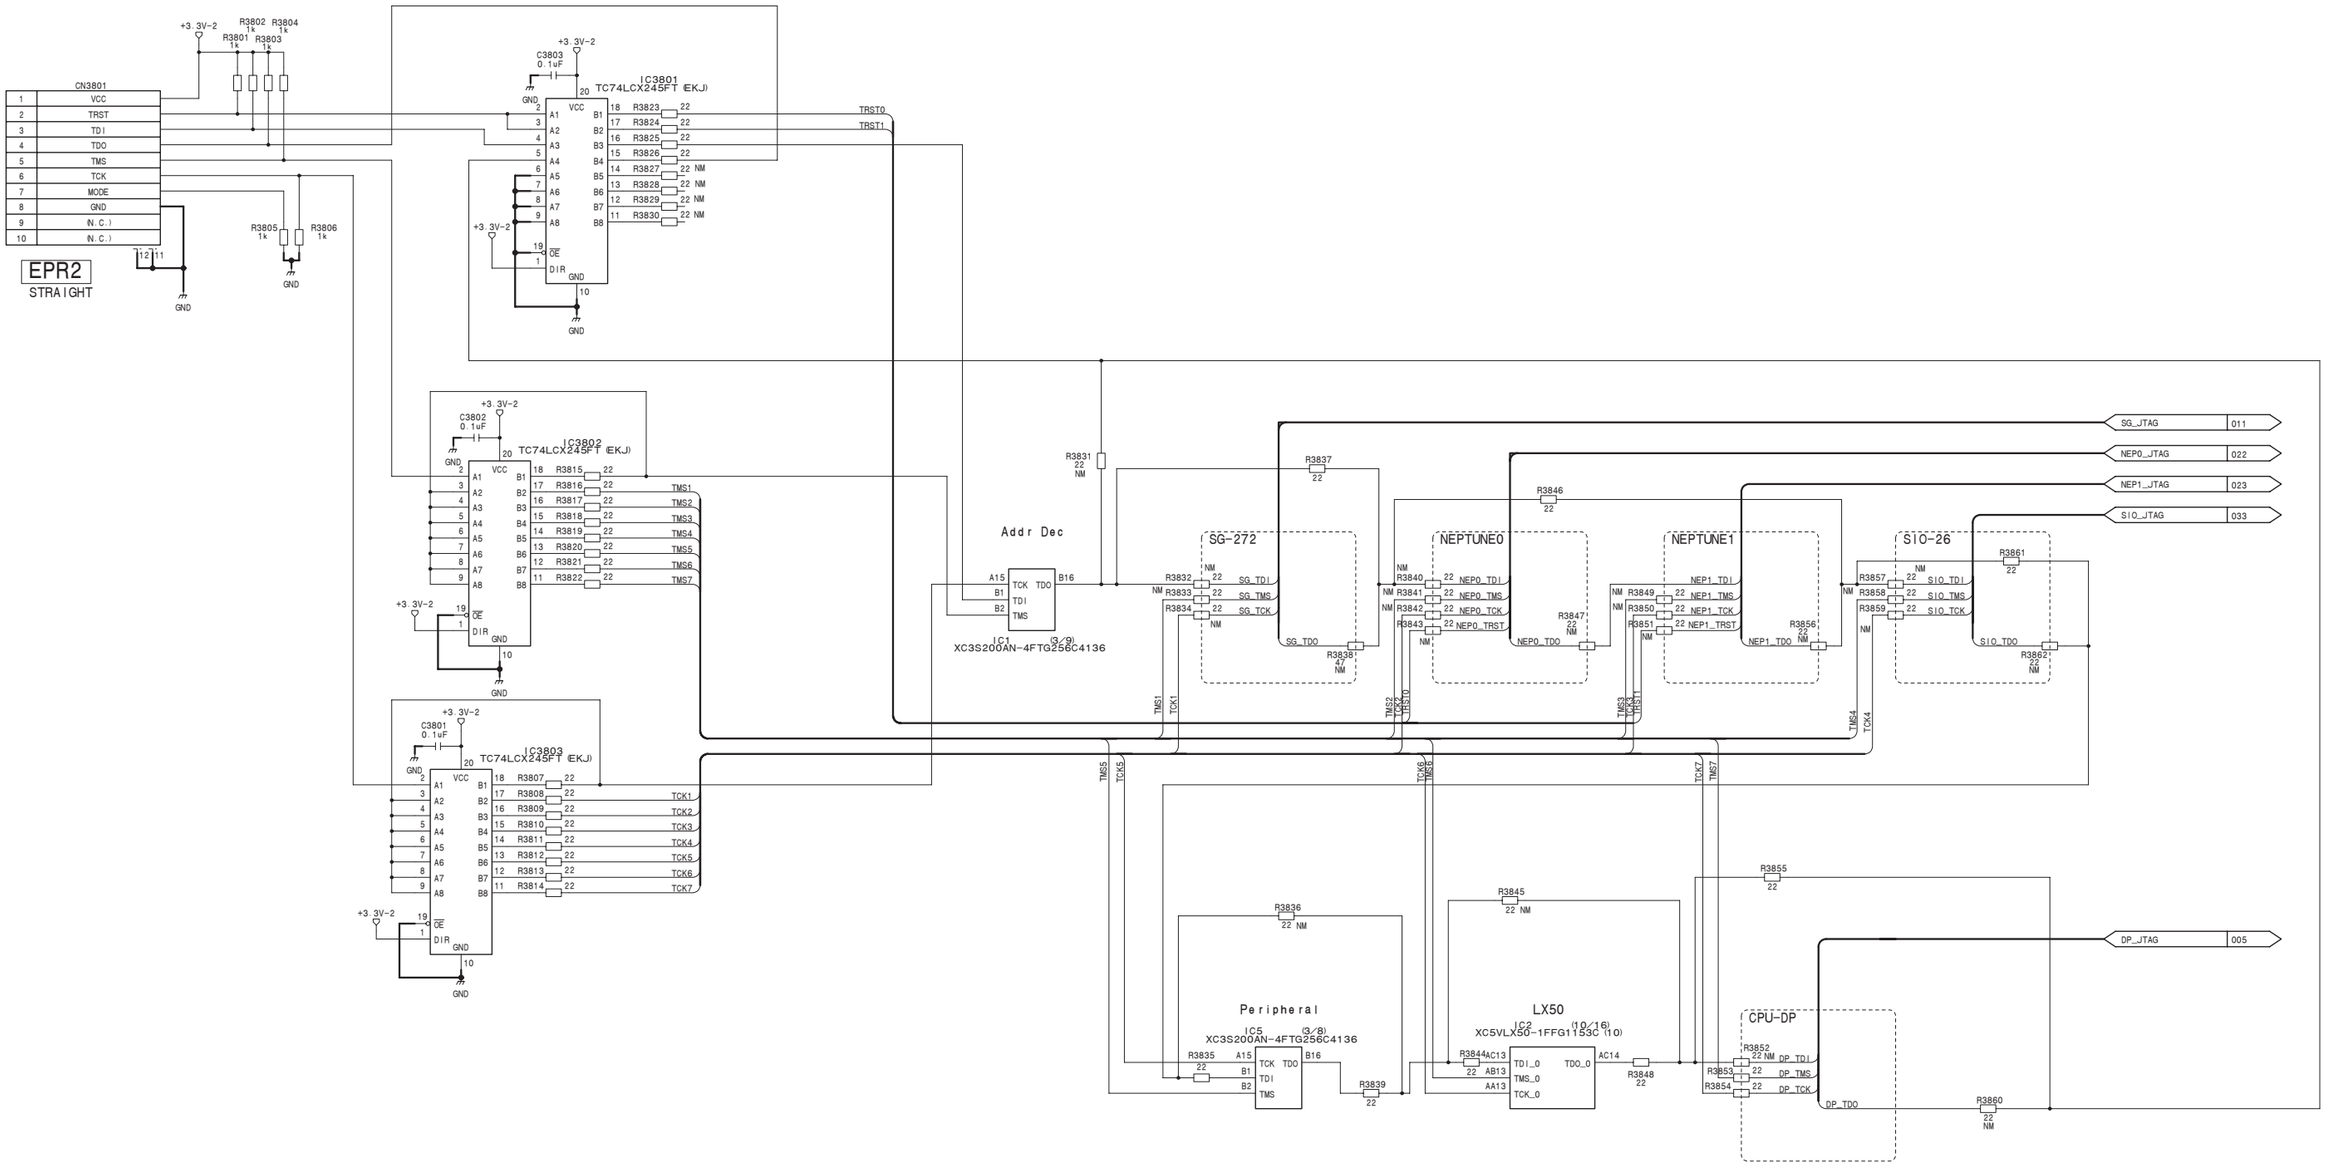

4-40 (a)

006. 032. 033 BUS_C_ADDR
007. 032. 033 BUS_C16_DATA
007. 008. 032. 033 BUS_C_CTRL
008. 014. 017. 032 EXT_INT

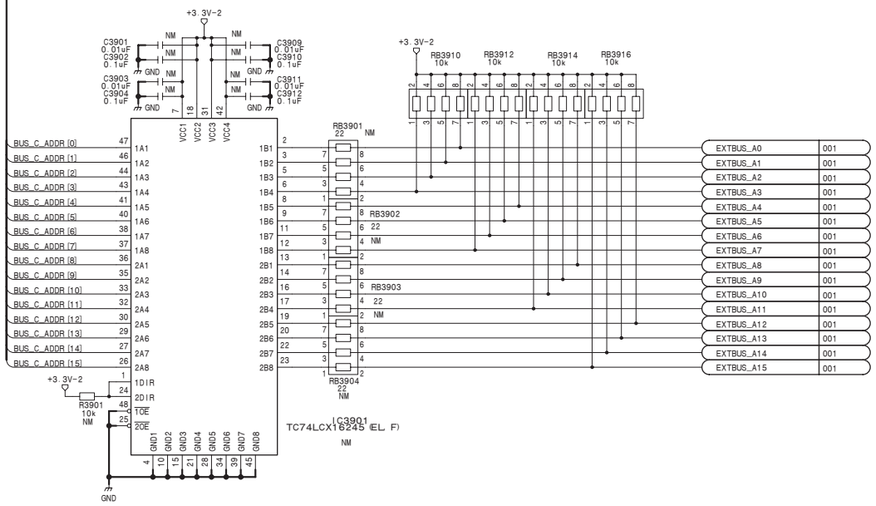

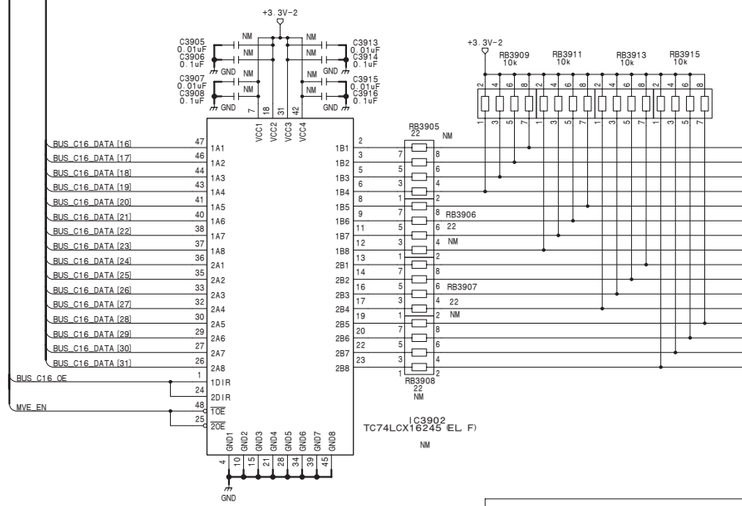

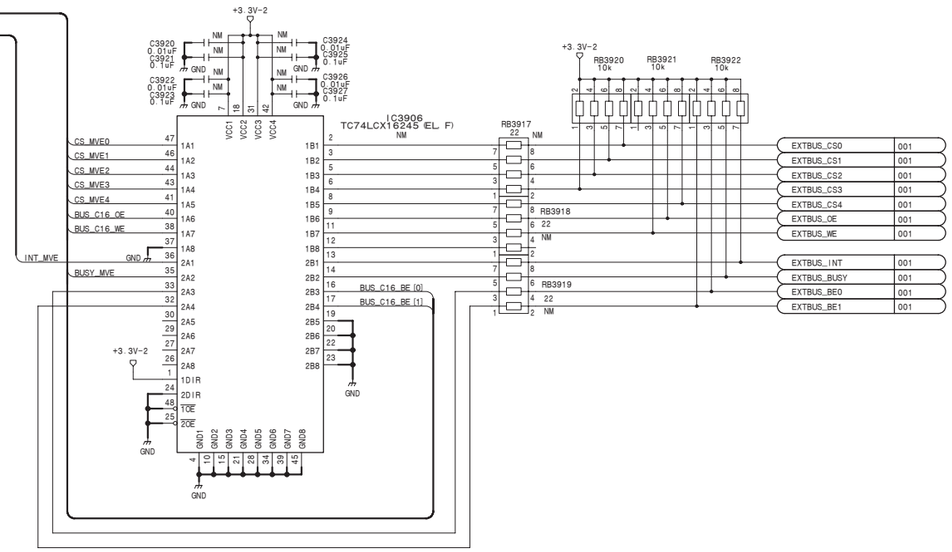

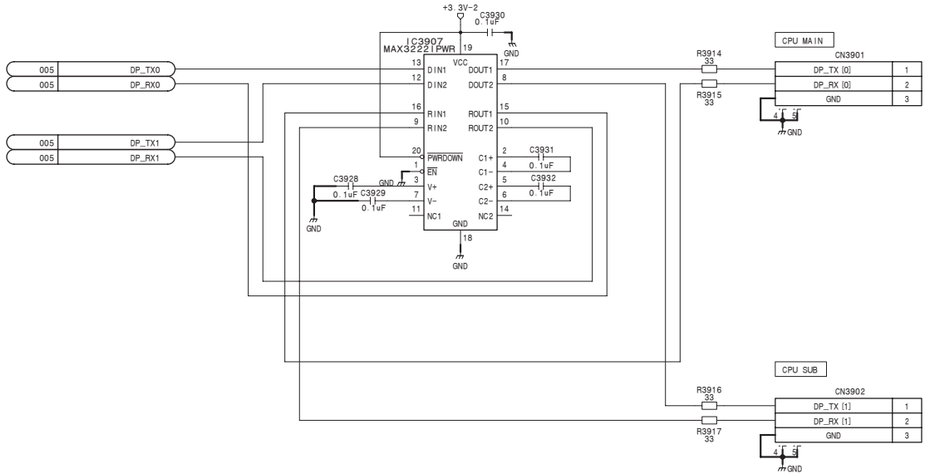

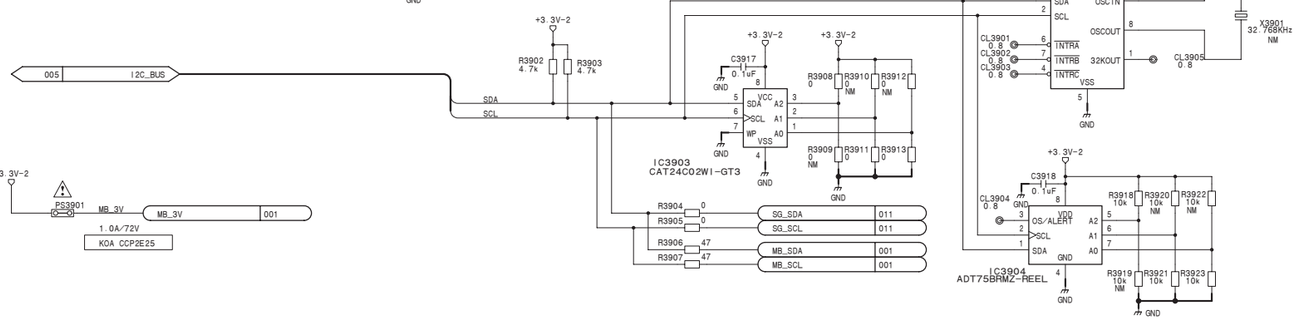

MVE I/F & I2C

CA-82 (39/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_39

CA-82 (40/42)
SUFFIX: -14

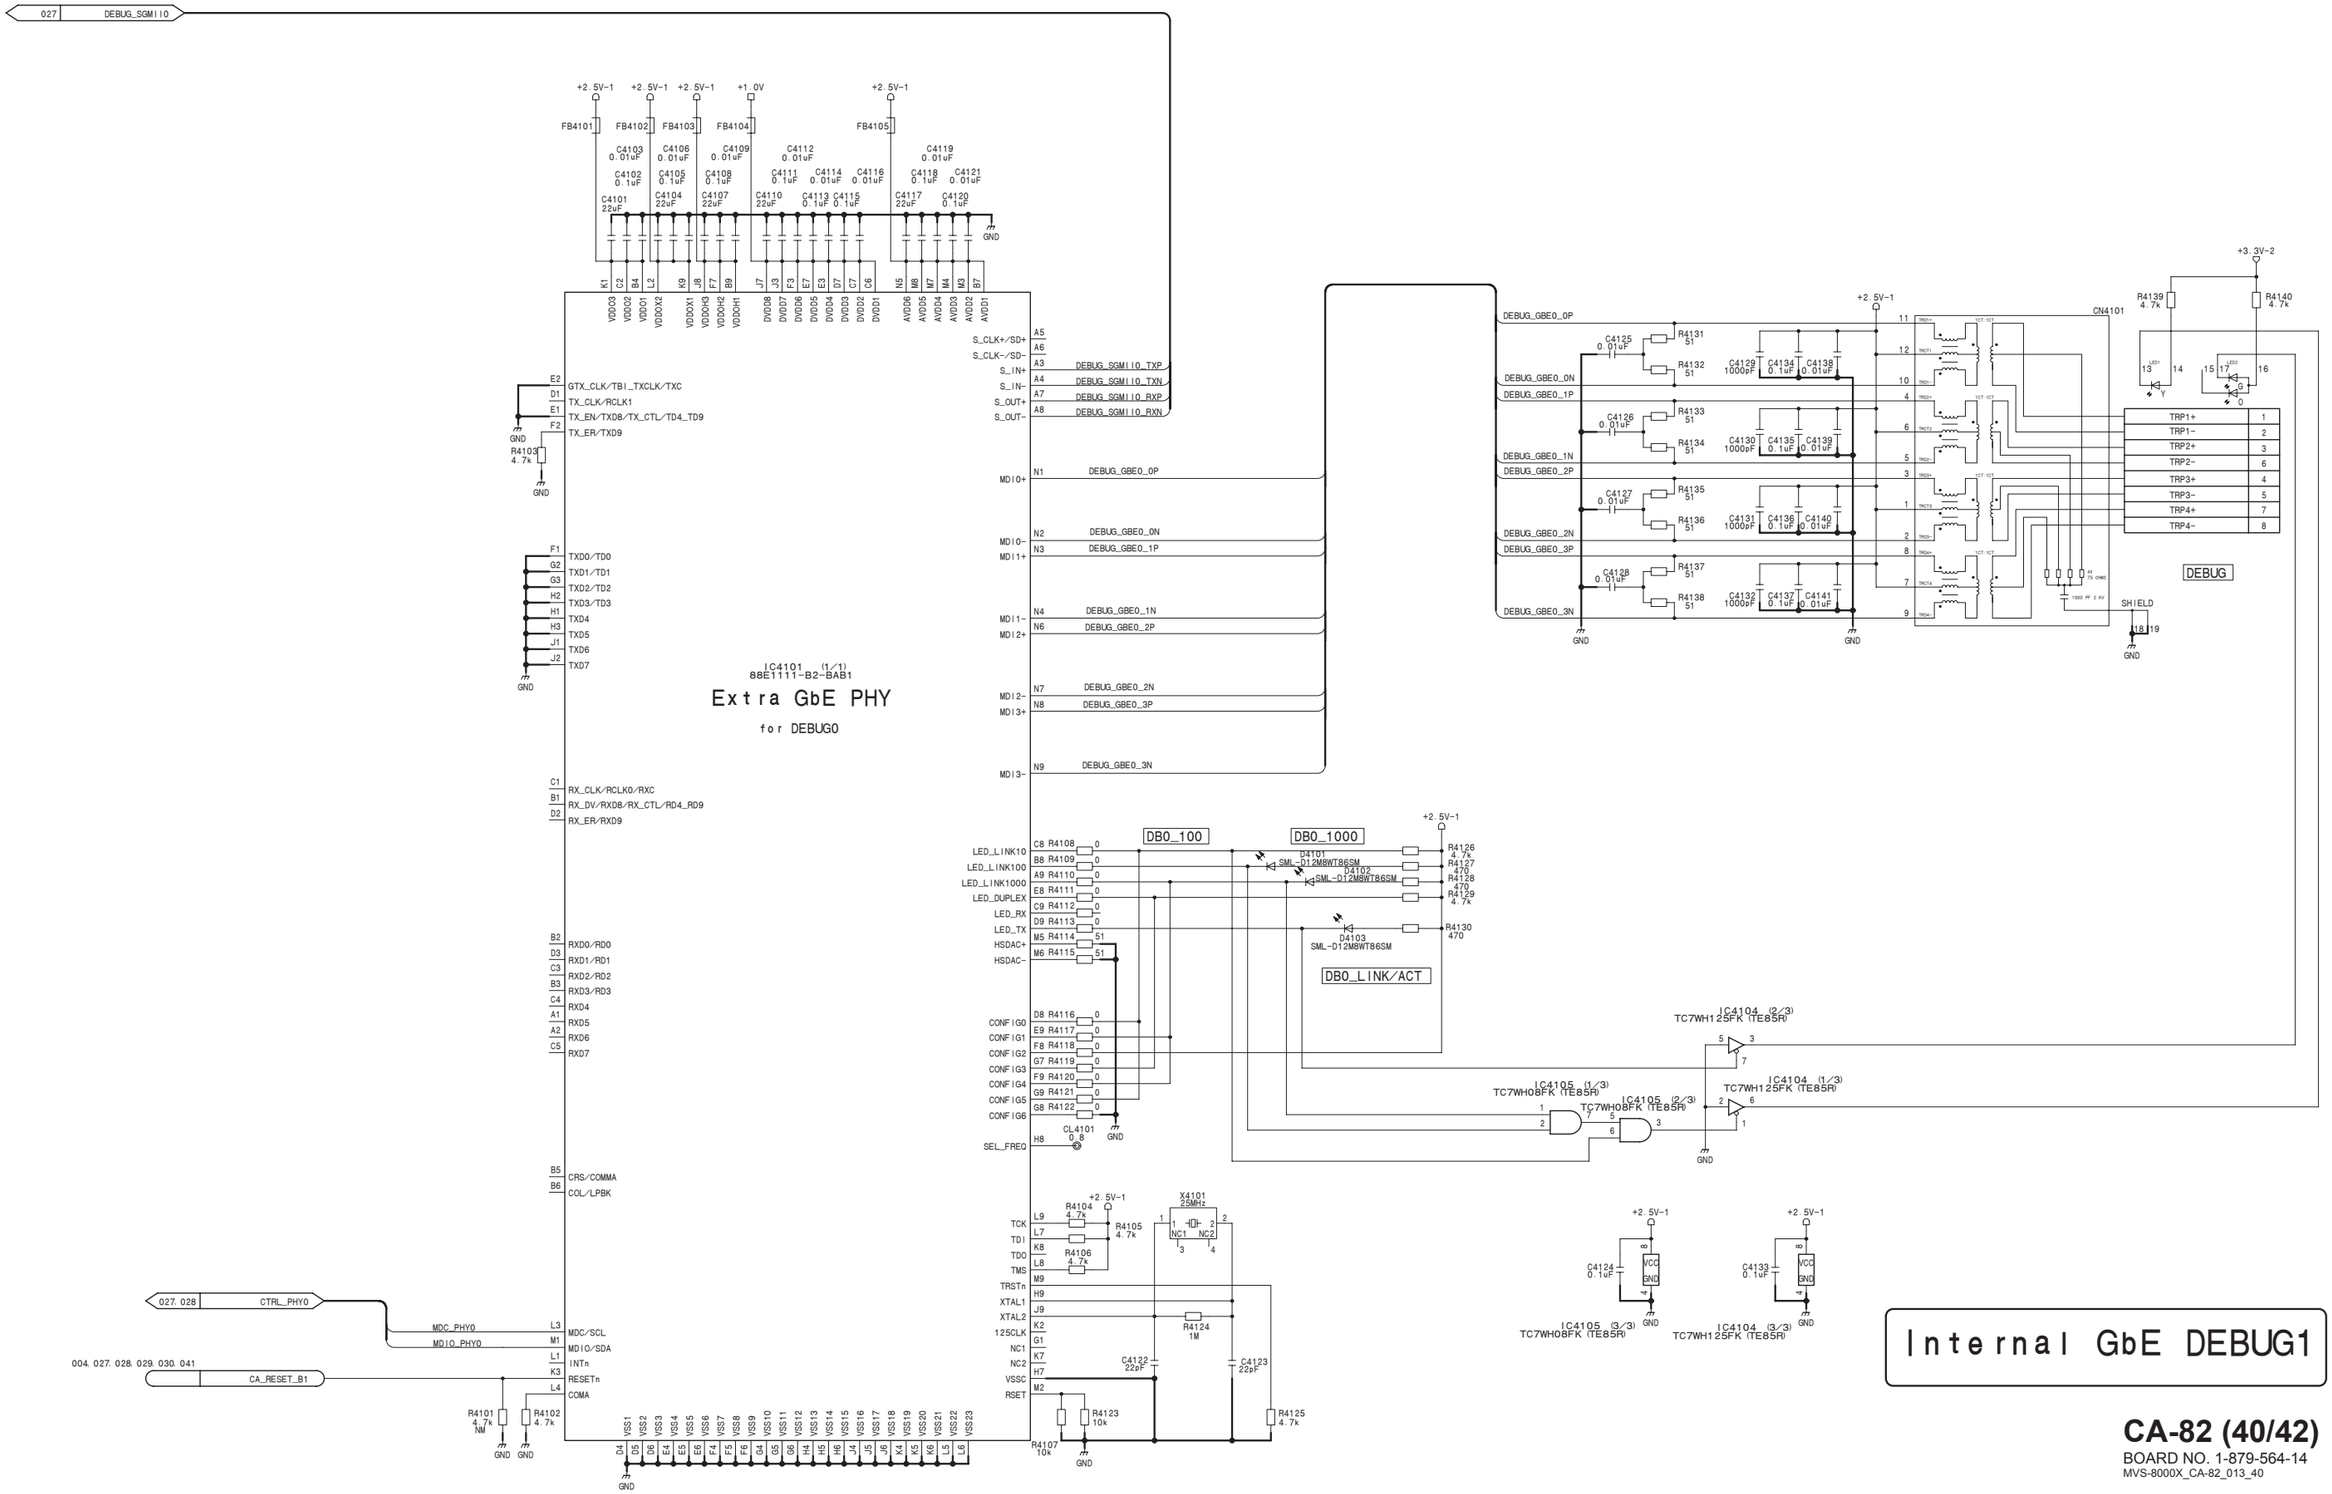

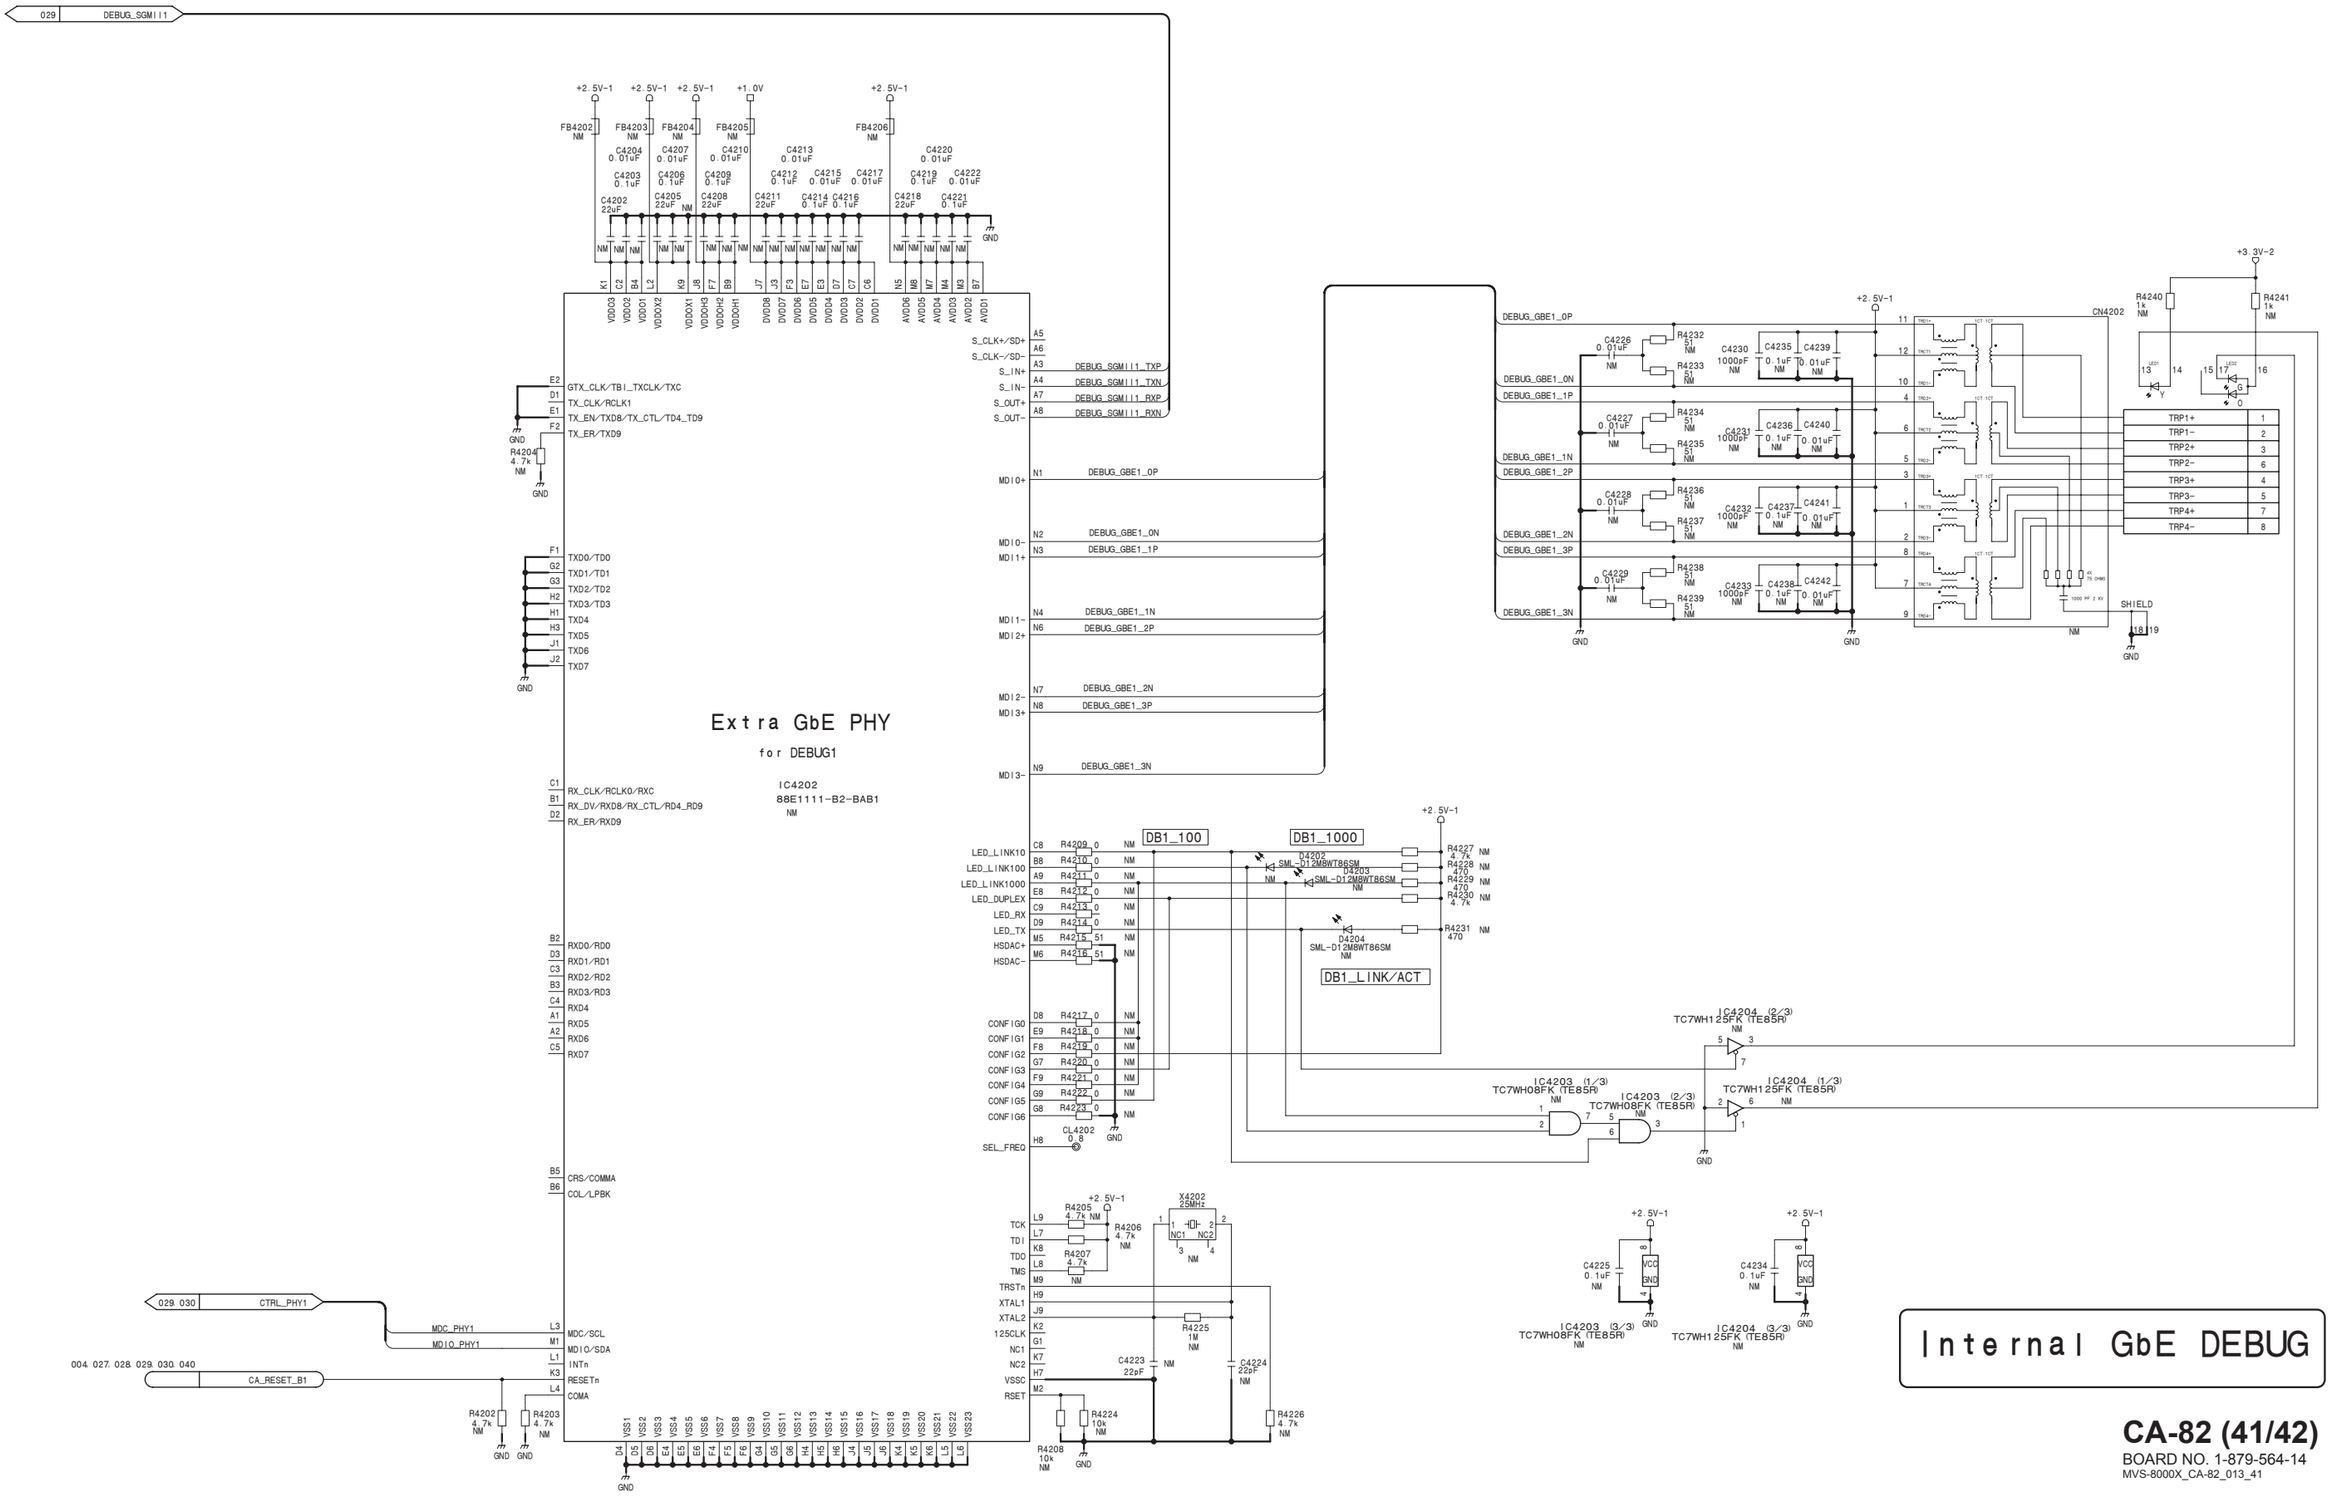

Internal GbE DEBUG

CA-82 (41/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_41

CA-82 (42/42)
SUFFIX: -14

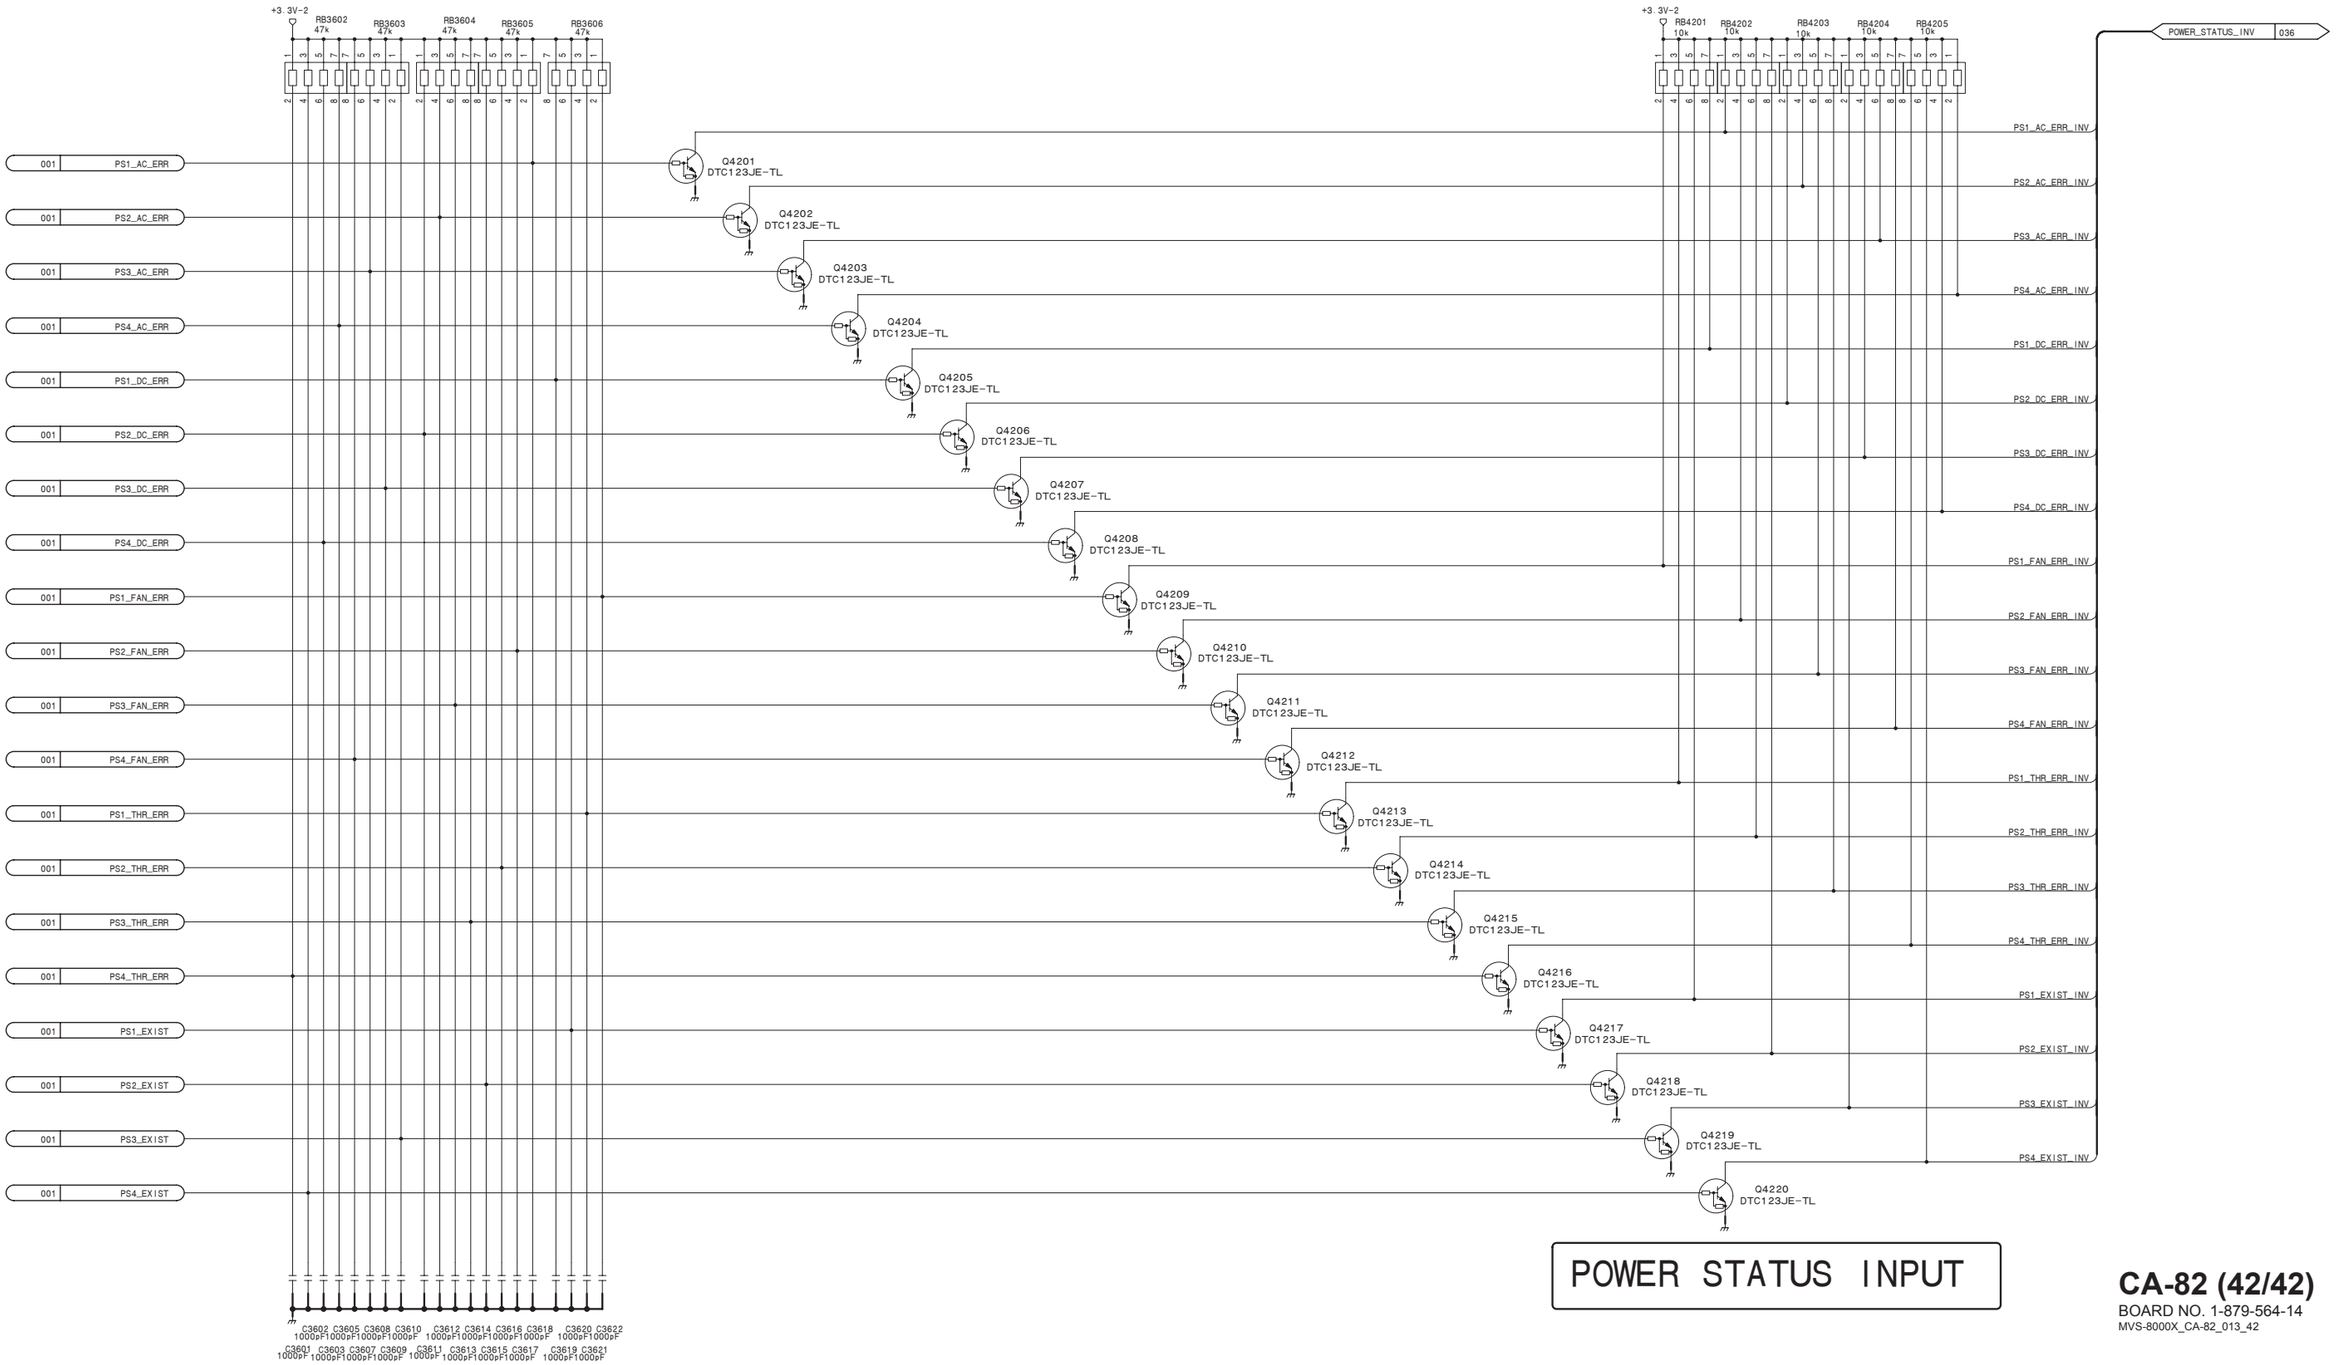

POWER STATUS INPUT

CA-82 (42/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82_013_42

4-44 (a)

CA-82A (1/42)
SUFFIX: -14

Leftmost

K

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	DC_ENBL0 (EMG)	DC_ENBL1 (Normal)	GND	SD/HD0	FUSE+12V	GND
6	GND (BD_EXIST_17F)	(BD_EXIST_17R)	GND	SD/HD1	SD/HD2	GND
7	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
8	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10	RESET0	RESET1	GND	RESET2	RESET3	GND

HD/SD : high -> SD, Low -> HD

CNC1

	A	B	BG	C	D	DG
1	VCLK0P	VCLK0N	GND	VCLK1P	VCLK1N	GND
2	VCLK2P	VCLK2N	GND	VCLK3P	VCLK3N	GND
3	VCLK4P	VCLK4N	GND	VCLK5P	VCLK5N	GND
4	VCLK6P	VCLK6N	GND	VCLK7P	VCLK7N	GND
5	VCLK8P	VCLK8N	GND	VCLK9P	VCLK9N	GND
6	VCLK10P	VCLK10N	GND	VCLK11P	VCLK11N	GND
7	VCLK12P	VCLK12N	GND			GND
8	FD0P	FD0N	GND	VD0P	VD0N	GND
9	FD1P	FD1N	GND	VD1P	VD1N	GND
10	FD2P	FD2N	GND	VD2P	VD2N	GND

CND1

	A	B	BG	C	D	DG
1	FD3P	FD3N	GND	VD3P	VD3N	GND
2	FD4P	FD4N	GND	VD4P	VD4N	GND
3	FD5P	FD5N	GND	VD5P	VD5N	GND
4	FD6P	FD6N	GND	VD6P	VD6N	GND
5	FD7P	FD7N	GND	VD7P	VD7N	GND
6	FD8P	FD8N	GND	VD8P	VD8N	GND
7	FD9P	FD9N	GND	VD9P	VD9N	GND
8	FD10P	FD10N	GND	VD10P	VD10N	GND
9	FD11P	FD11N	GND	VD11P	VD11N	GND
10	FD12P	FD12N	GND	VD12P	VD12N	GND

CNJ1

	A	B	BG	C	D	DG
1	EXTBUS_CS4		GND	EXTBUS_INT	EXTBUS_BUSY	GND
2	INET0_TRX0P	INET0_TRX0N	GND	INET0_TRX1P	INET0_TRX1N	GND
3	INET0_TRX2P	INET0_TRX2N	GND	INET0_TRX3P	INET0_TRX3N	GND
4	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
5	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
6			GND			GND
7	INET2_TRX0P	INET2_TRX0N	GND	INET2_TRX1P	INET2_TRX1N	GND
8	INET2_TRX2P	INET2_TRX2N	GND	INET2_TRX3P	INET2_TRX3N	GND
9	INET3_TRX0P	INET3_TRX0N	GND	INET3_TRX1P	INET3_TRX1N	GND
10	INET3_TRX2P	INET3_TRX2N	GND	INET3_TRX3P	INET3_TRX3N	GND

CNK1

	A	B	BG	C	D	DG
1			GND			GND
2	INET4_TRX0P	INET4_TRX0N	GND	INET4_TRX1P	INET4_TRX1N	GND
3	INET4_TRX2P	INET4_TRX2N	GND	INET4_TRX3P	INET4_TRX3N	GND
4	INET5_TRX0P	INET5_TRX0N	GND	INET5_TRX1P	INET5_TRX1N	GND
5	INET5_TRX2P	INET5_TRX2N	GND	INET5_TRX3P	INET5_TRX3N	GND
6			GND			GND
7	INET6_TRX0P	INET6_TRX0N	GND	INET6_TRX1P	INET6_TRX1N	GND
8	INET6_TRX2P	INET6_TRX2N	GND	INET6_TRX3P	INET6_TRX3N	GND
9	INET7_TRX0P	INET7_TRX0N	GND	INET7_TRX1P	INET7_TRX1N	GND
10	INET7_TRX2P	INET7_TRX2N	GND	INET7_TRX3P	INET7_TRX3N	GND

CNL1

	A	B	BG	C	D	DG
1	BD_EXT_19F	BD_EXT_18F	GND	BD_EXT_19R	BD_EXT_18R	GND
2	BD_EXT_17F	BD_EXT_16F	GND	BD_EXT_17R	BD_EXT_16R	GND
3	BD_EXT_15F	BD_EXT_14F	GND	BD_EXT_15R	BD_EXT_14R	GND
4	BD_EXT_13F	BD_EXT_12F	GND	BD_EXT_13R	BD_EXT_12R	GND
5	BD_EXT_11F	BD_EXT_10F	GND	BD_EXT_11R	BD_EXT_10R	GND
6	BD_EXT_9F	BD_EXT_8F	GND	BD_EXT_9R	BD_EXT_8R	GND
7	BD_EXT_7F	BD_EXT_6F	GND	BD_EXT_7R	BD_EXT_6R	GND
8	BD_EXT_5F	BD_EXT_4F	GND	BD_EXT_5R	BD_EXT_4R	GND
9	BD_EXT_3F	BD_EXT_2F	GND	BD_EXT_3R	BD_EXT_2R	GND
10	BD_EXT_1F	BD_EXT_0F	GND	BD_EXT_1R	BD_EXT_0R	GND

K

CNE1

	A	B	BG	C	D	DG
1		TC_IN	GND		REF_IN0	GND
2	(REF_IN2)		GND	(REF_IN1)		GND
3	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
4	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
5	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB_RESET_IN	EXTHUB_RESET_OUT	GND
6	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
7			GND	EXTHUB1_INT		GND
8			GND			GND
9			GND			GND
10			GND			GND

K

CNF1

	A	B	BG	C	D	DG
1	GBE0_TRX2P	GBE0_TRX2N	GND	GBE0_TRX3P	GBE0_TRX3N	GND
2	GBE0_TRX0P	GBE0_TRX0N	GND	GBE0_TRX1P	GBE0_TRX1N	GND
3	GBE0_LED_L	GBE0_LED_R	GND	GBE1_LED_L	GBE1_LED_R	GND
4	GBE1_TRX2P	GBE1_TRX2N	GND	GBE1_TRX3P	GBE1_TRX3N	GND
5	GBE1_TRX0P	GBE1_TRX0N	GND	GBE1_TRX1P	GBE1_TRX1N	GND
6	GBE2_TRX2P	GBE2_TRX2N	GND	GBE2_TRX3P	GBE2_TRX3N	GND
7	GBE2_TRX0P	GBE2_TRX0N	GND	GBE2_TRX1P	GBE2_TRX1N	GND
8	GBE2_LED_L	GBE2_LED_R	GND	GBE3_LED_L	GBE3_LED_R	GND
9	GBE3_TRX2P	GBE3_TRX2N	GND	GBE3_TRX3P	GBE3_TRX3N	GND
10	GBE3_TRX0P	GBE3_TRX0N	GND	GBE3_TRX1P	GBE3_TRX1N	GND

CNG1

	A	B	BG	C	D	DG
1	EXTBUS_A0	EXTBUS_A1	GND	EXTBUS_D0	EXTBUS_D1	GND
2	EXTBUS_A2	EXTBUS_A3	GND	EXTBUS_D2	EXTBUS_D3	GND
3	EXTBUS_A4	EXTBUS_A5	GND	EXTBUS_D4	EXTBUS_D5	GND
4	EXTBUS_A6	EXTBUS_A7	GND	EXTBUS_D6	EXTBUS_D7	GND
5	EXTBUS_A8	EXTBUS_A9	GND	EXTBUS_D8	EXTBUS_D9	GND
6	EXTBUS_A10	EXTBUS_A11	GND	EXTBUS_D10	EXTBUS_D11	GND
7	EXTBUS_A12	EXTBUS_A13	GND	EXTBUS_D12	EXTBUS_D13	GND
8	EXTBUS_A14	EXTBUS_A15	GND	EXTBUS_D14	EXTBUS_D15	GND
9	EXTBUS_OE	EXTBUS_WE	GND	EXTBUS_BE0	EXTBUS_BE1	GND
10	EXTBUS_CS0	EXTBUS_CS1	GND	EXTBUS_CS2	EXTBUS_CS3	GND

K

CNM1

	A	B	BG	C	D	DG
1	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
2	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
3	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
4	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
5	GPI2_OUT1	GPI2_IN1	GND	GPI1_OUT1	GPI1_IN1	GND
6	GPI2_OUT2	GPI2_IN2	GND	GPI1_OUT2	GPI1_IN2	GND
7	GPI2_OUT3	GPI2_IN3	GND	GPI1_OUT3	GPI1_IN3	GND
8	GPI2_OUT4	GPI2_IN4	GND	GPI1_OUT4	GPI1_IN4	GND
9	GPI2_OUT5	GPI2_IN5	GND	GPI1_OUT5	GPI1_IN5	GND
10	GPI2_OUT6	GPI2_IN6	GND	GPI1_OUT6	GPI1_IN6	GND

K

CNN1

	A	B	BG	C	D	DG
1	GPI2_OUT7	GPI2_IN7	GND	GPI1_OUT7	GPI1_IN7	GND
2	GPI2_OUT8	GPI2_IN8	GND	GPI1_OUT8	GPI1_IN8	GND
3	POW_SEQ0	POW_SEQ1	GND			GND
4	FAN1_PULSE1	FAN1_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
5	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
6	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
7	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
8	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
9	FAN5_PULSE1	FAN5_PULSE2	GND	FAN5_PULSE3	FAN5_PULSE4	GND
10	FAN5_PULSE5	FAN6_PULSE1	GND	FAN6_PULSE2	FAN6_PULSE3	GND

CNP1

	A	B	BG	C	D	DG
1	FAN6_PULSE4	FAN6_PULSE5	GND	FAN1_CTRL	FAN2_CTRL	GND
2	FAN3_CTRL	FAN4_CTRL	GND	FAN5_CTRL	FAN6_CTRL	GND
3	PS1_B_LED		GND	PS1_FAN_ERR	PS1_THR_ERR	GND
4	PS1_EXIST		GND	PS1_DC_ERR	PS1_AC_ERR	GND
5	PS2_B_LED		GND	PS2_FAN_ERR	PS2_THR_ERR	GND
6	PS2_EXIST		GND	PS2_DC_ERR	PS2_AC_ERR	GND
7	PS3_B_LED		GND	PS3_FAN_ERR	PS3_THR_ERR	GND
8	PS3_EXIST		GND	PS3_DC_ERR	PS3_AC_ERR	GND
9	PS4_B_LED		GND	PS4_FAN_ERR	PS4_THR_ERR	GND
10	PS4_EXIST		GND	PS4_DC_ERR	PS4_AC_ERR	GND

Rightmost

HM-Zd Connector

CA-82A (1/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_1

A B C D E F G H

1 2 3 4 5

CA-82A (2/42)
SUFFIX: -14

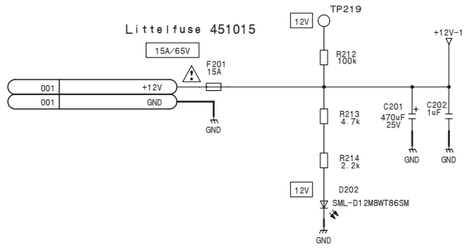

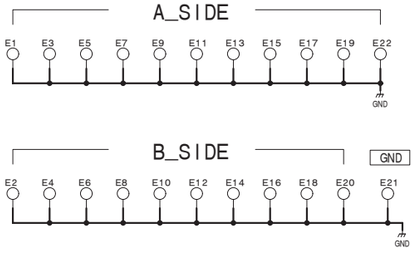

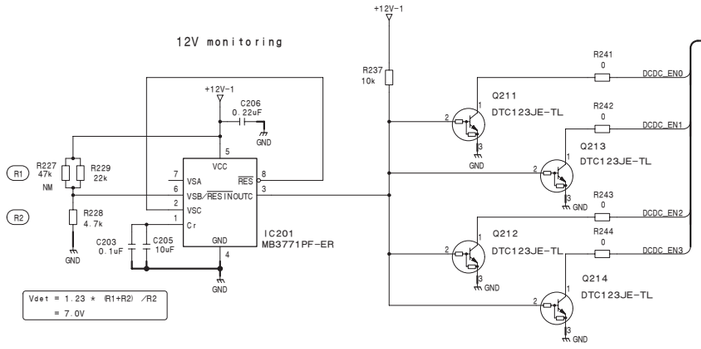

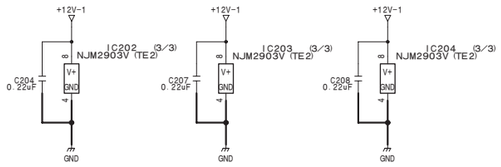

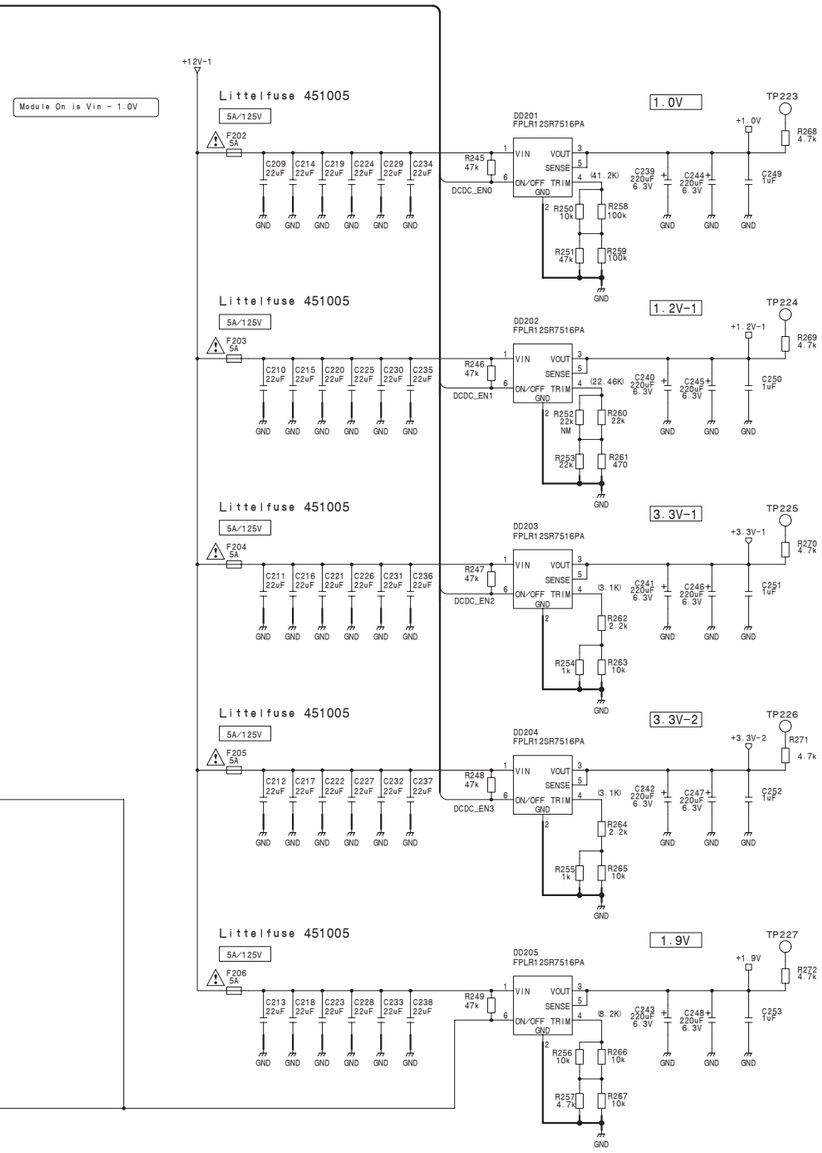

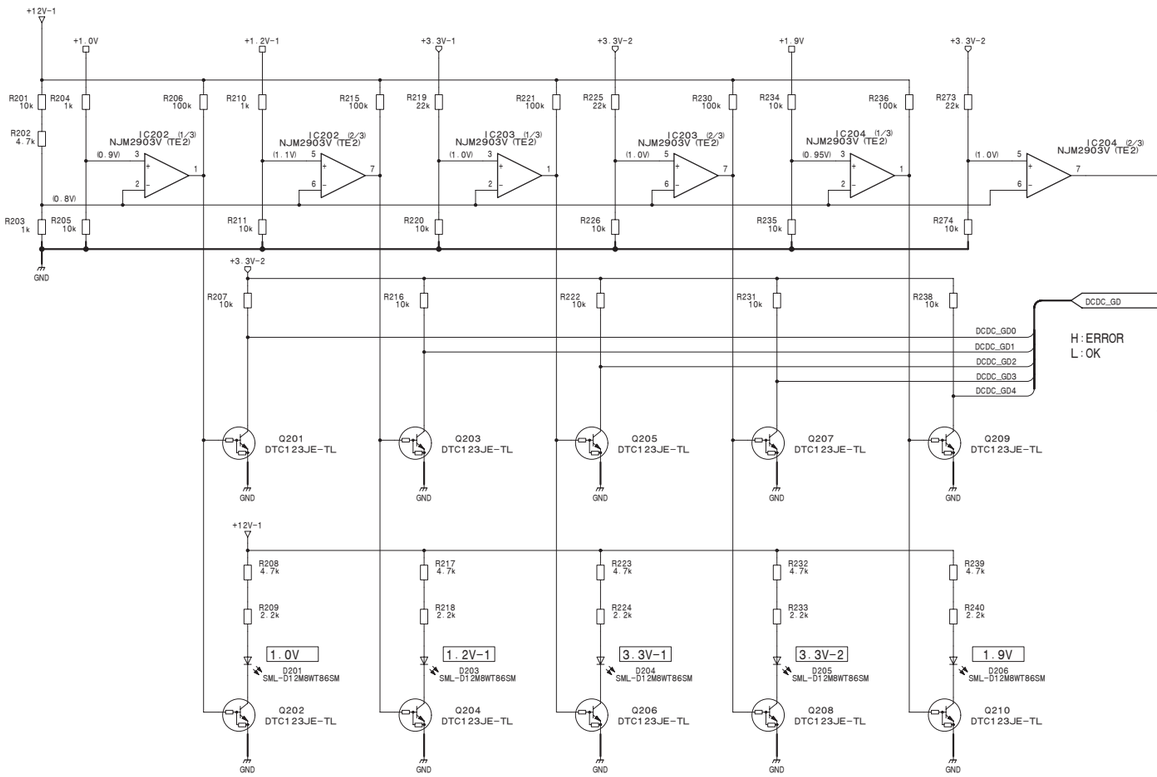

Power Supply 1/2

CA-82A (2/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_2

4-46

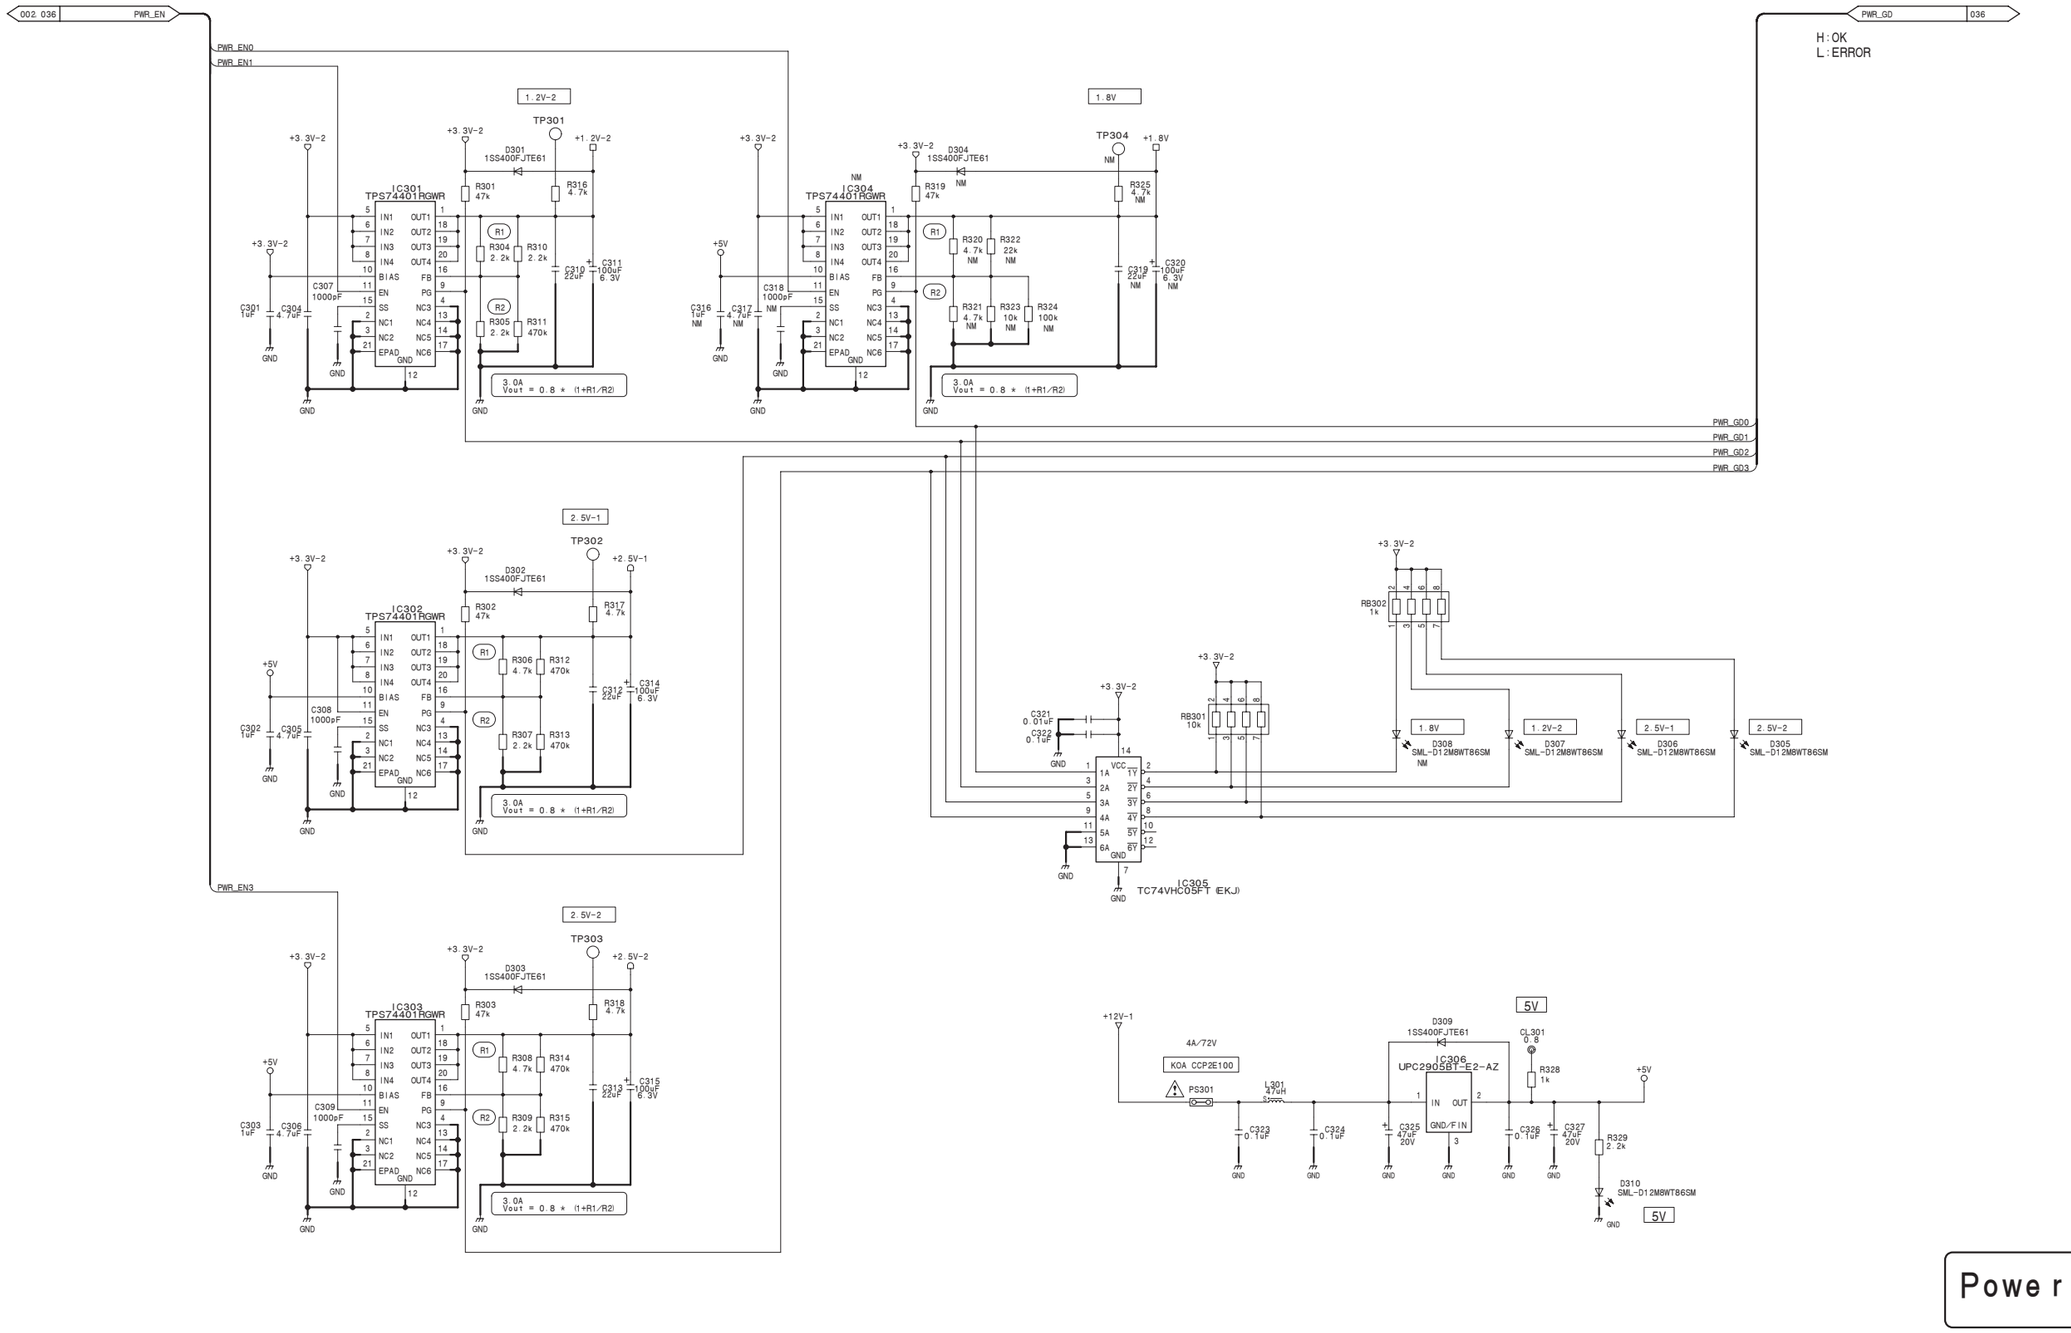

Power Supply 2/2

CA-82A (3/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_3

CA-82A (4/42)
SUFFIX: -14

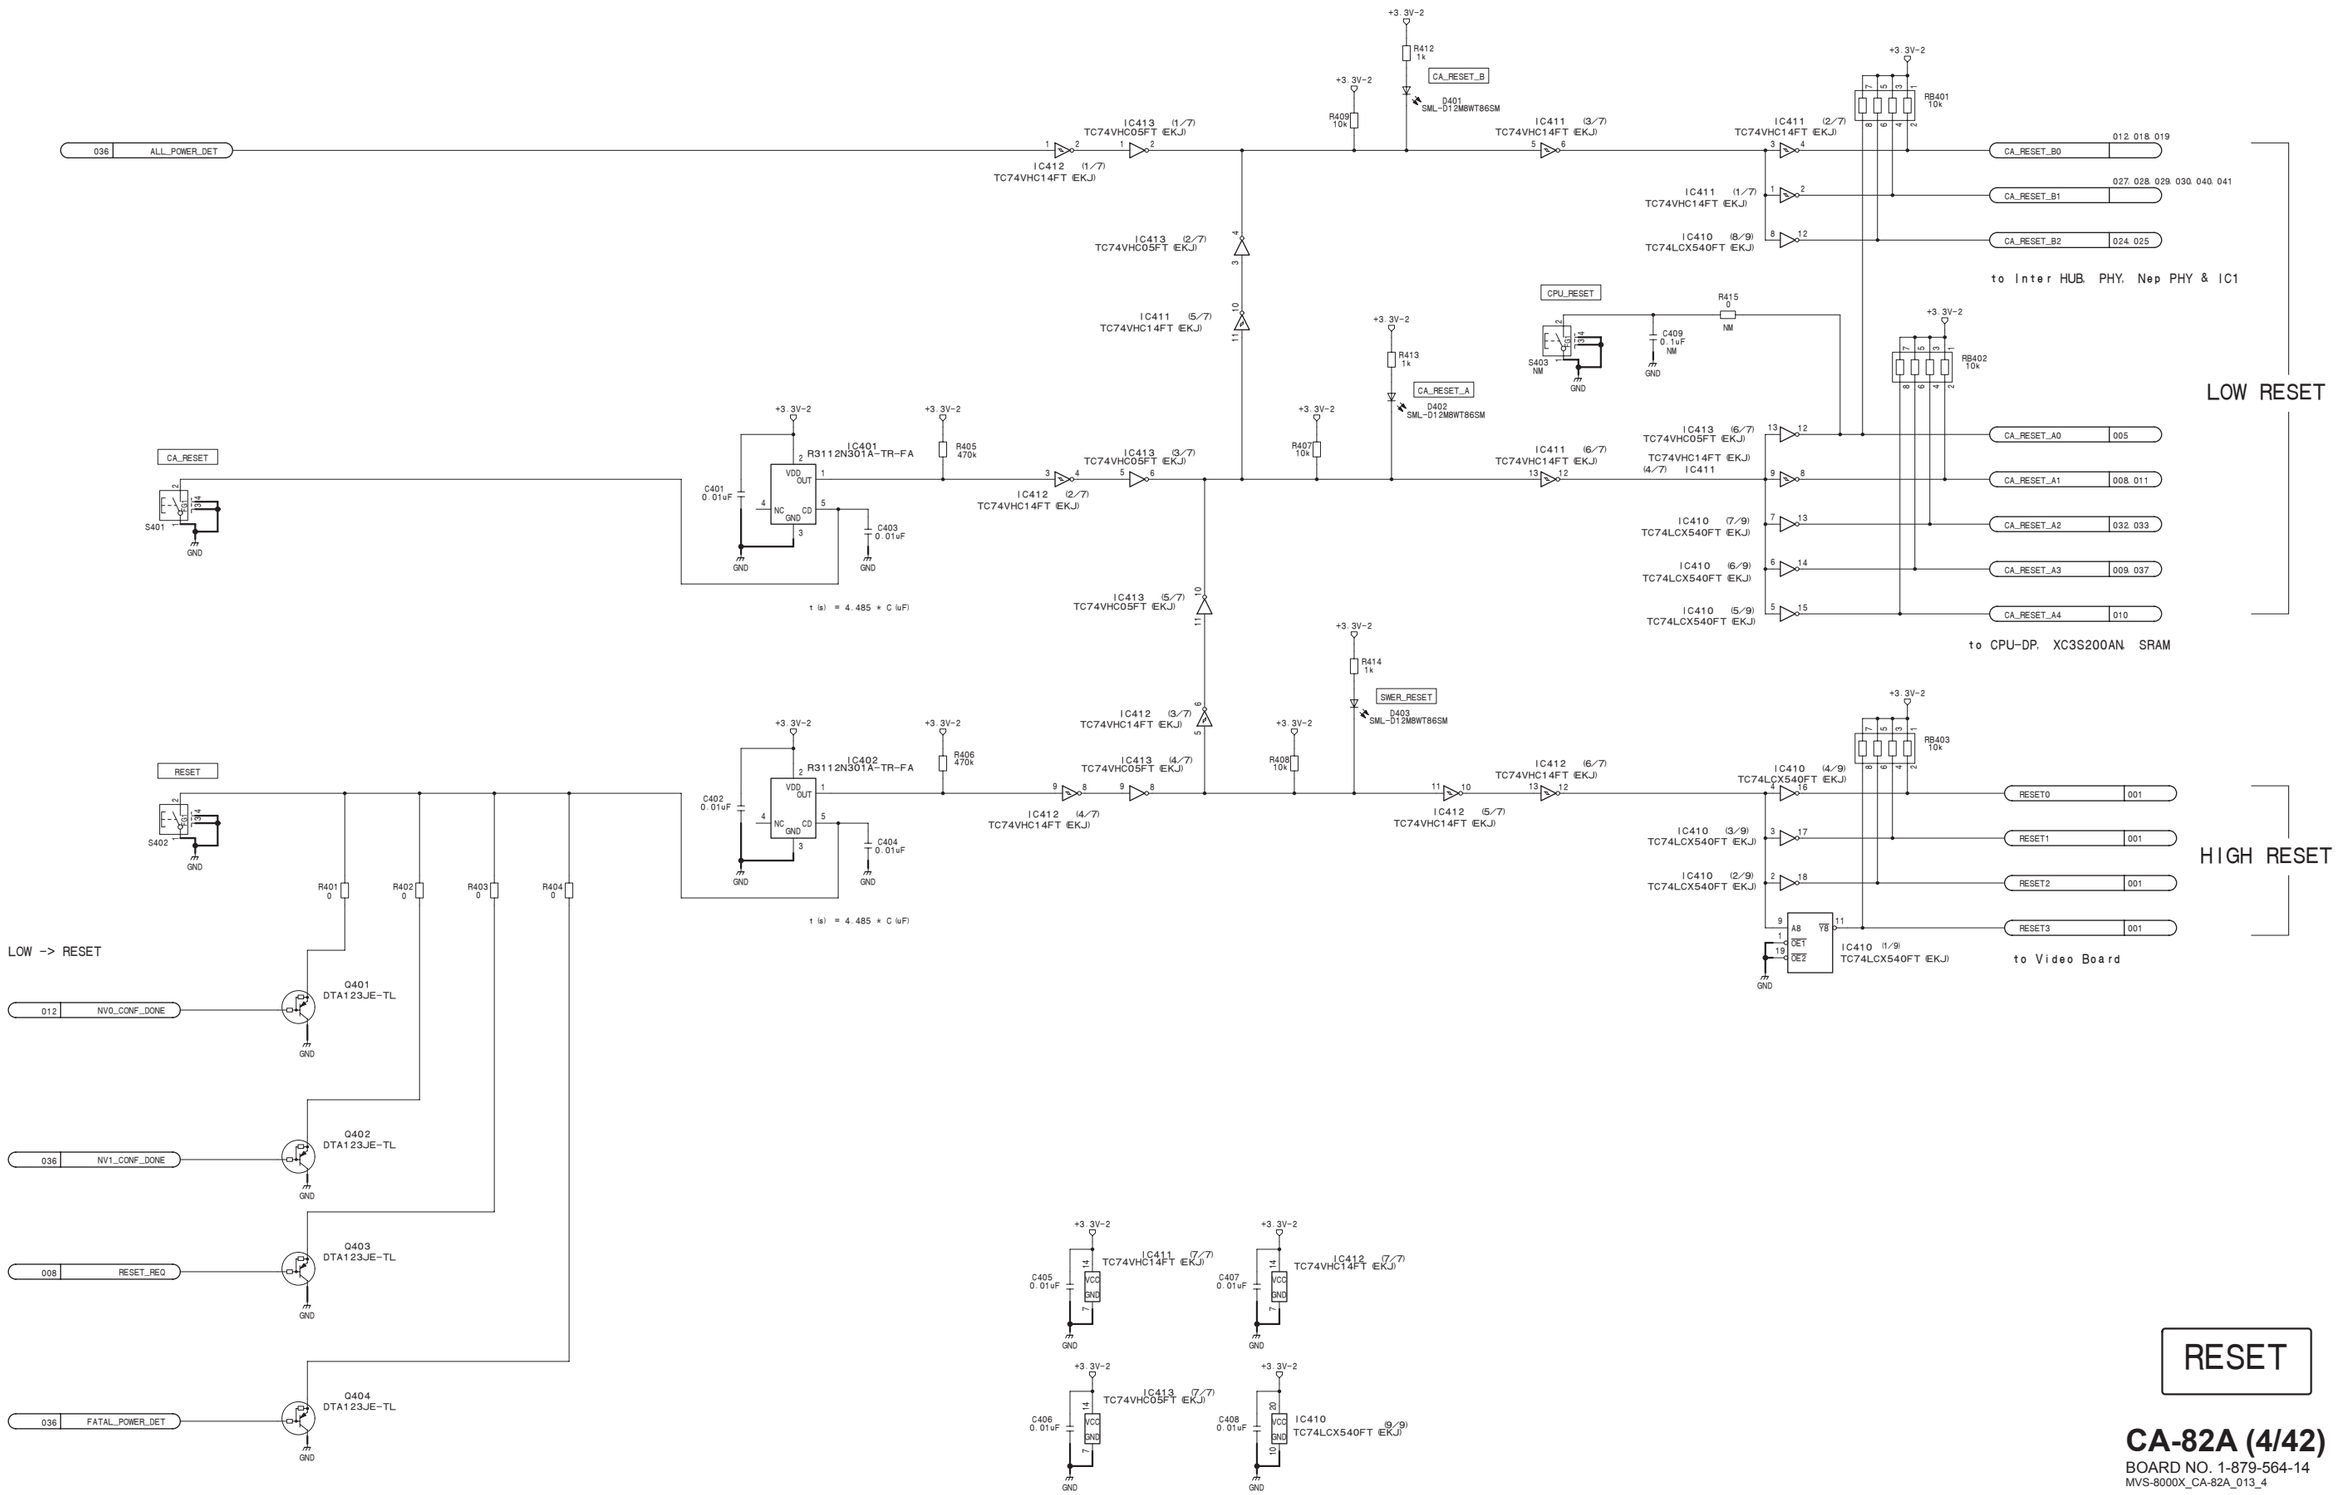

RESET

CA-82A (4/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_4

CA-82A (5/42)
SUFFIX: -14

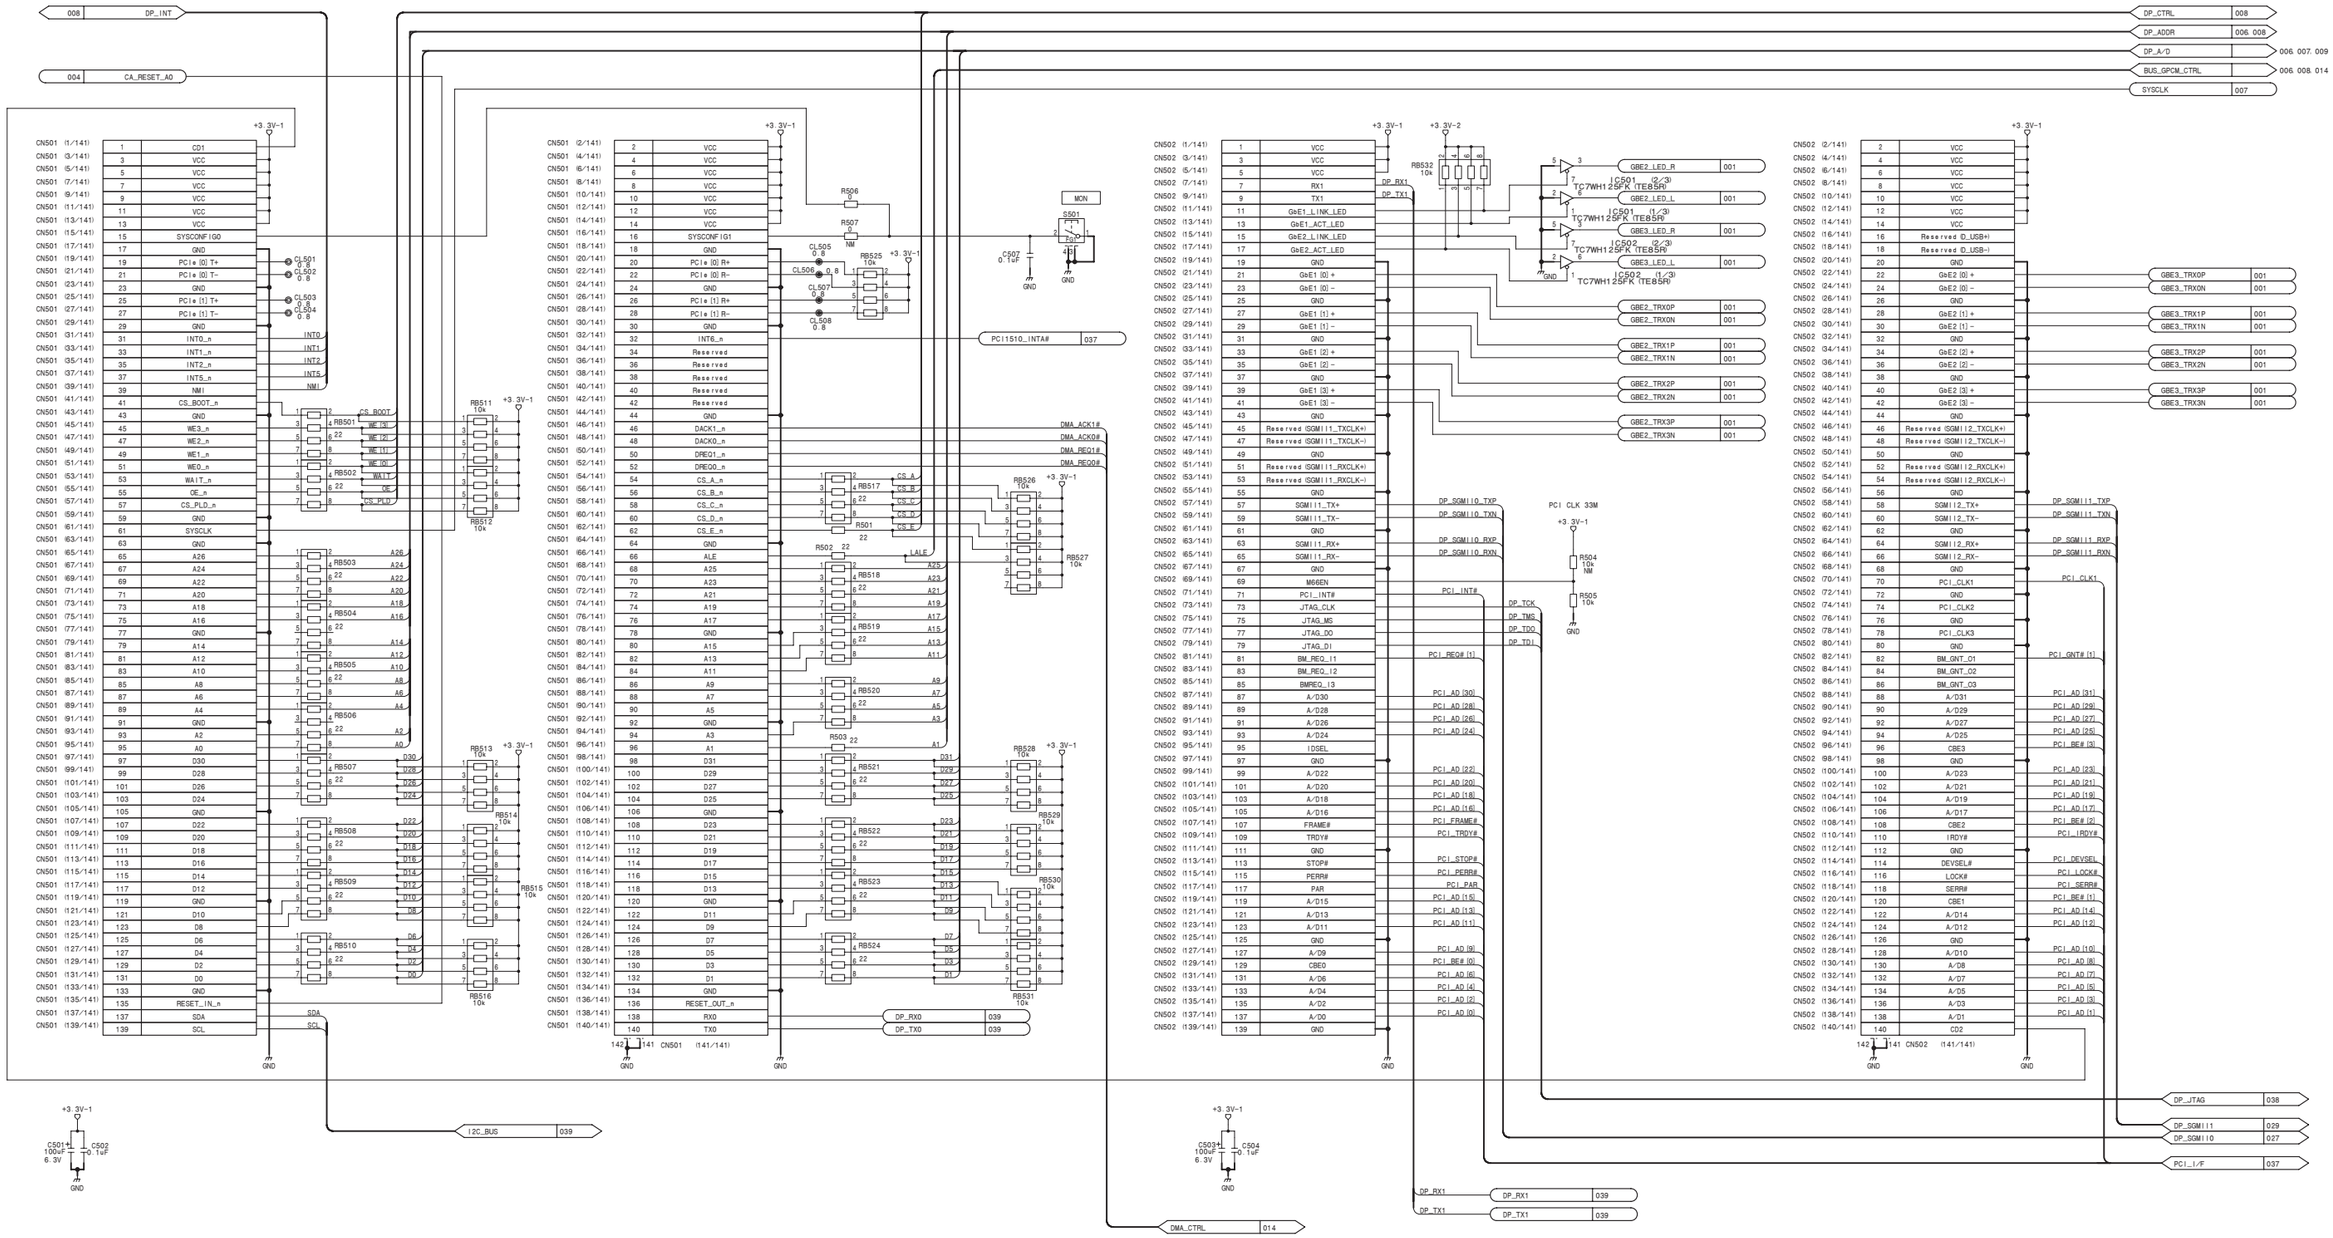

CPU-DP CONNECTOR

CA-82A (5/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_5

CA-82A (6/42)
SUFFIX: -14

005 008 DP_ADDR
005 007 009 DP_A/D
005 008 014 BUS_GPCM_CTRL

SRAM Flash BUS_A_ADDR 009 010
SG Neptune MSG BUS_B_ADDR 011 017
MVE SIO Peripheral2 BUS_C_ADDR 032 033 039
LX50 BUS_GPCM_A/D 014

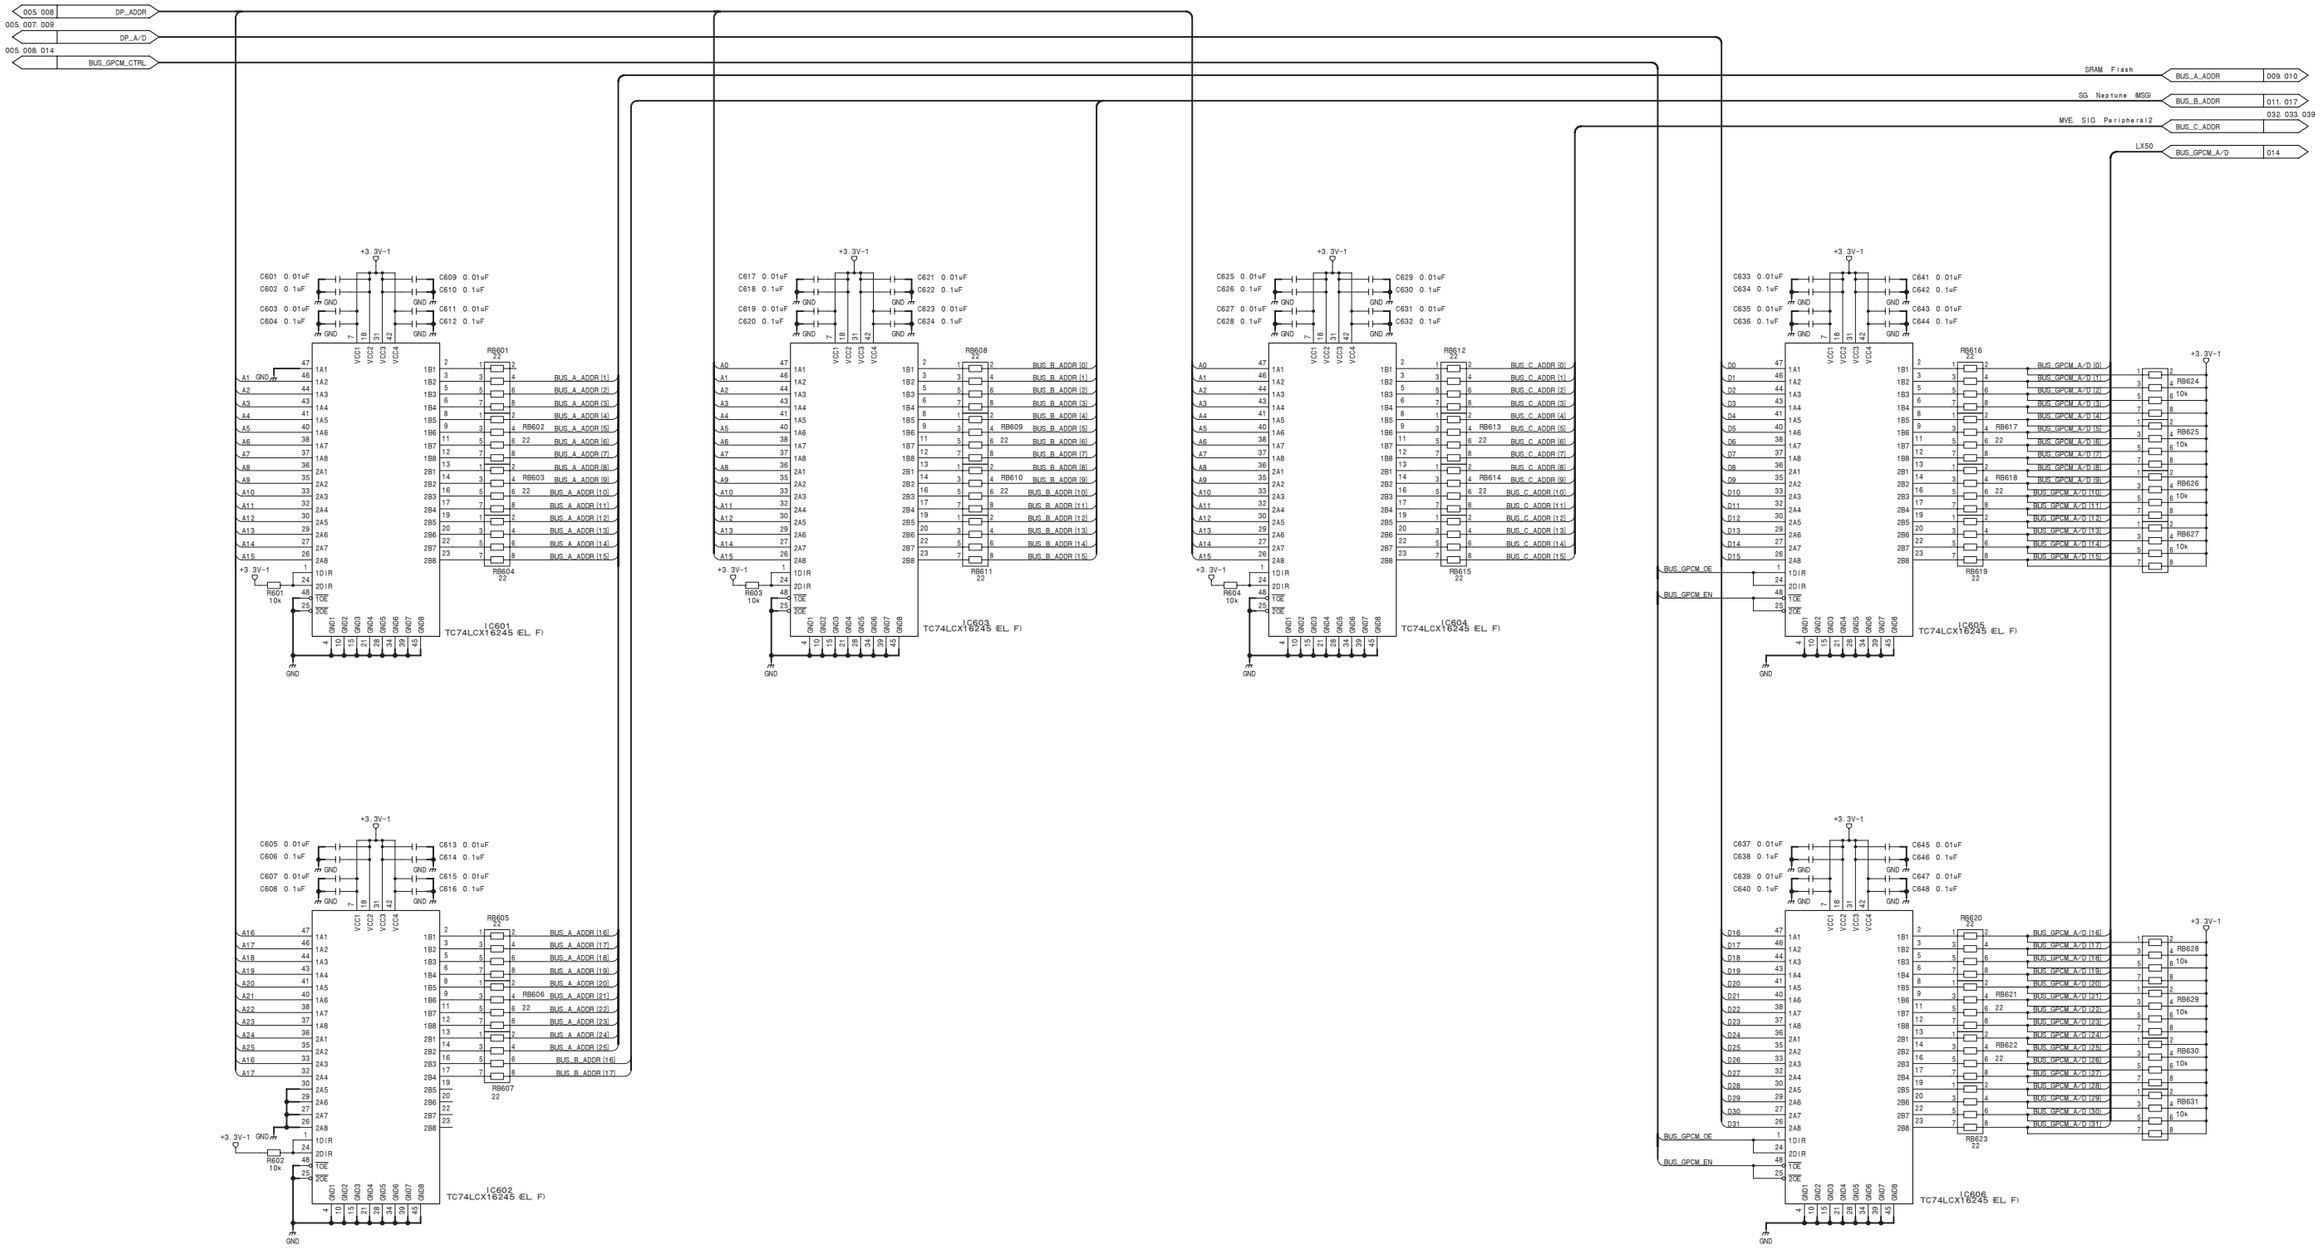

BUS BUFFER 1/2

CA-82A (6/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_6

CA-82A (7/42) SUFFIX: -14

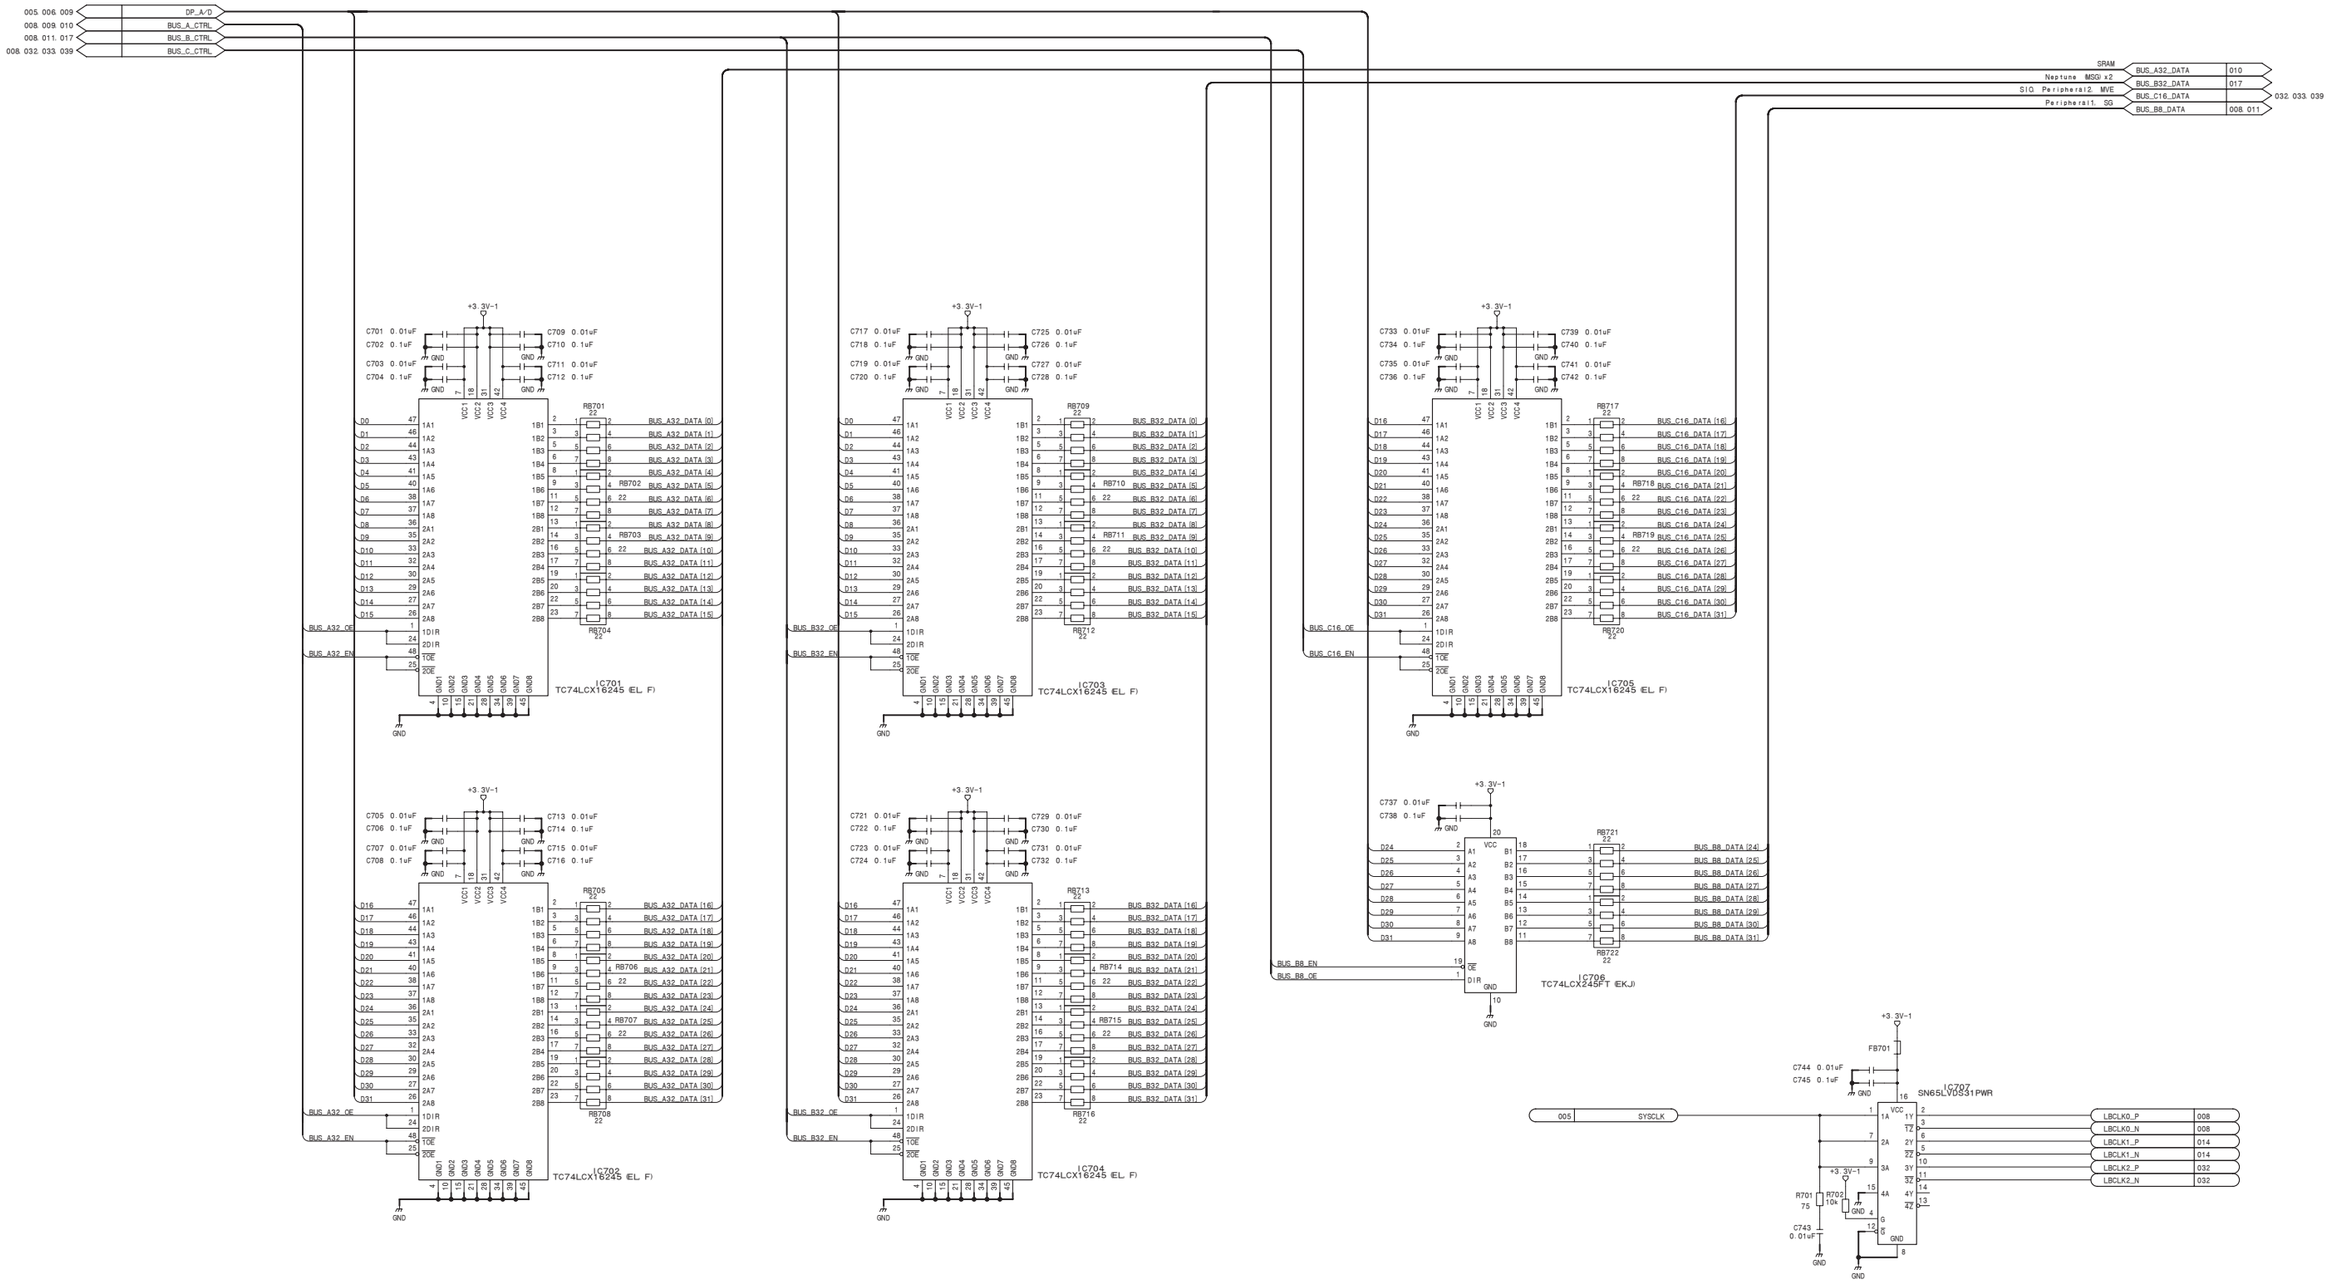

BUS BUFFER 2/2

CA-82A (7/42)

BOARD NO. 1-879-564-14

MVS-8000X_CA-82A_013_7

4-51

CA-82A (8/42) **SUFFIX: -14**

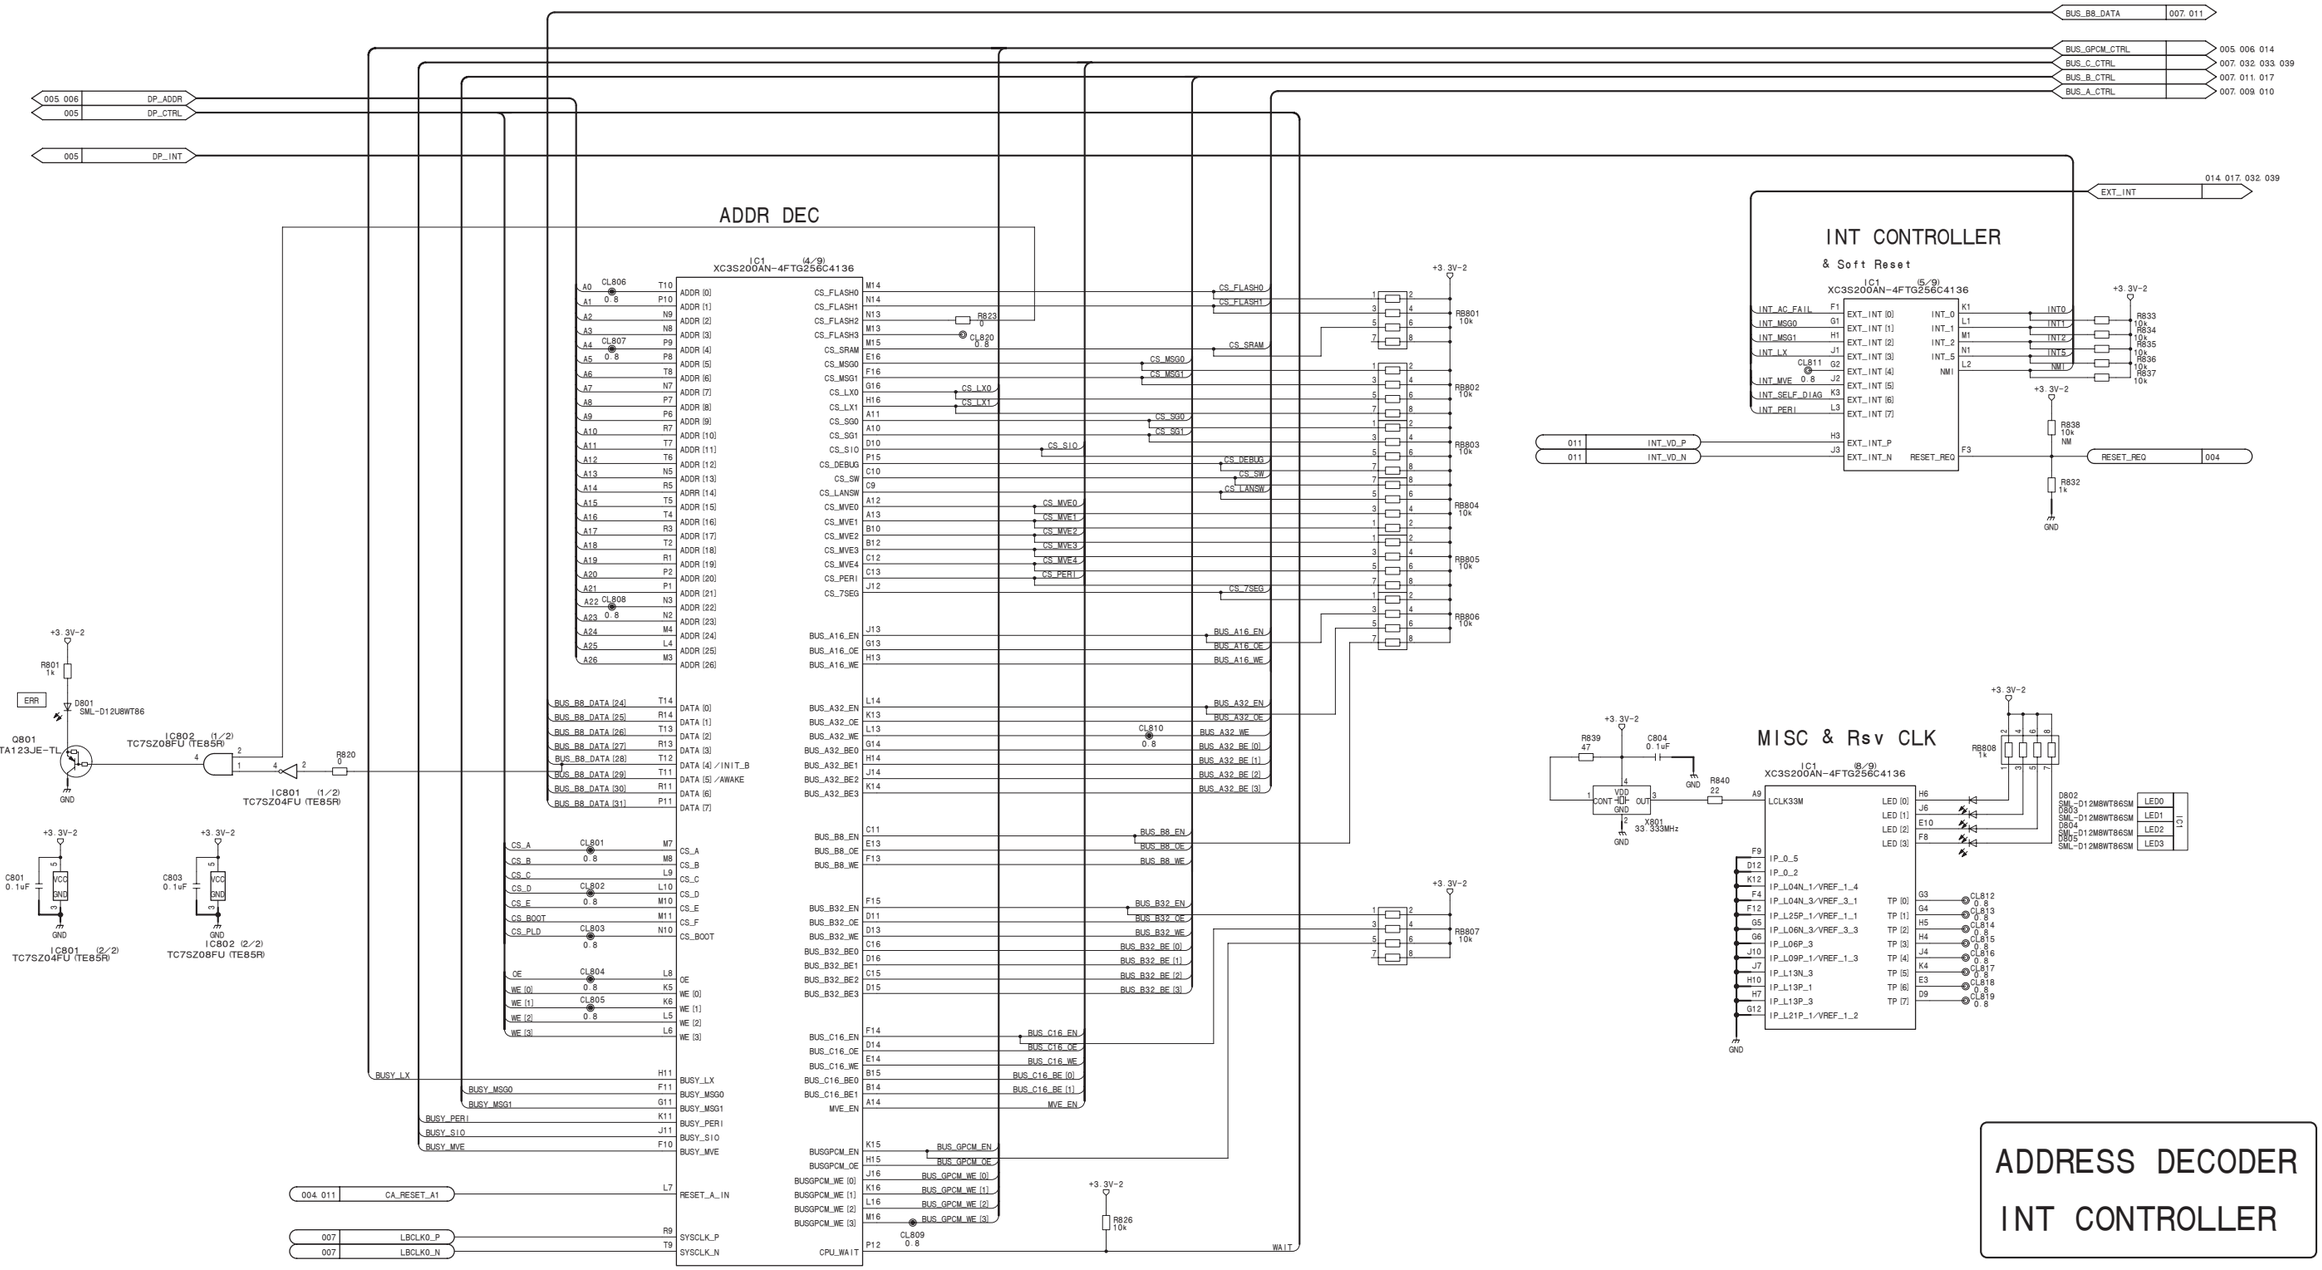

CA-82A (8/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_8

CA-82A (9/42)
SUFFIX: -14

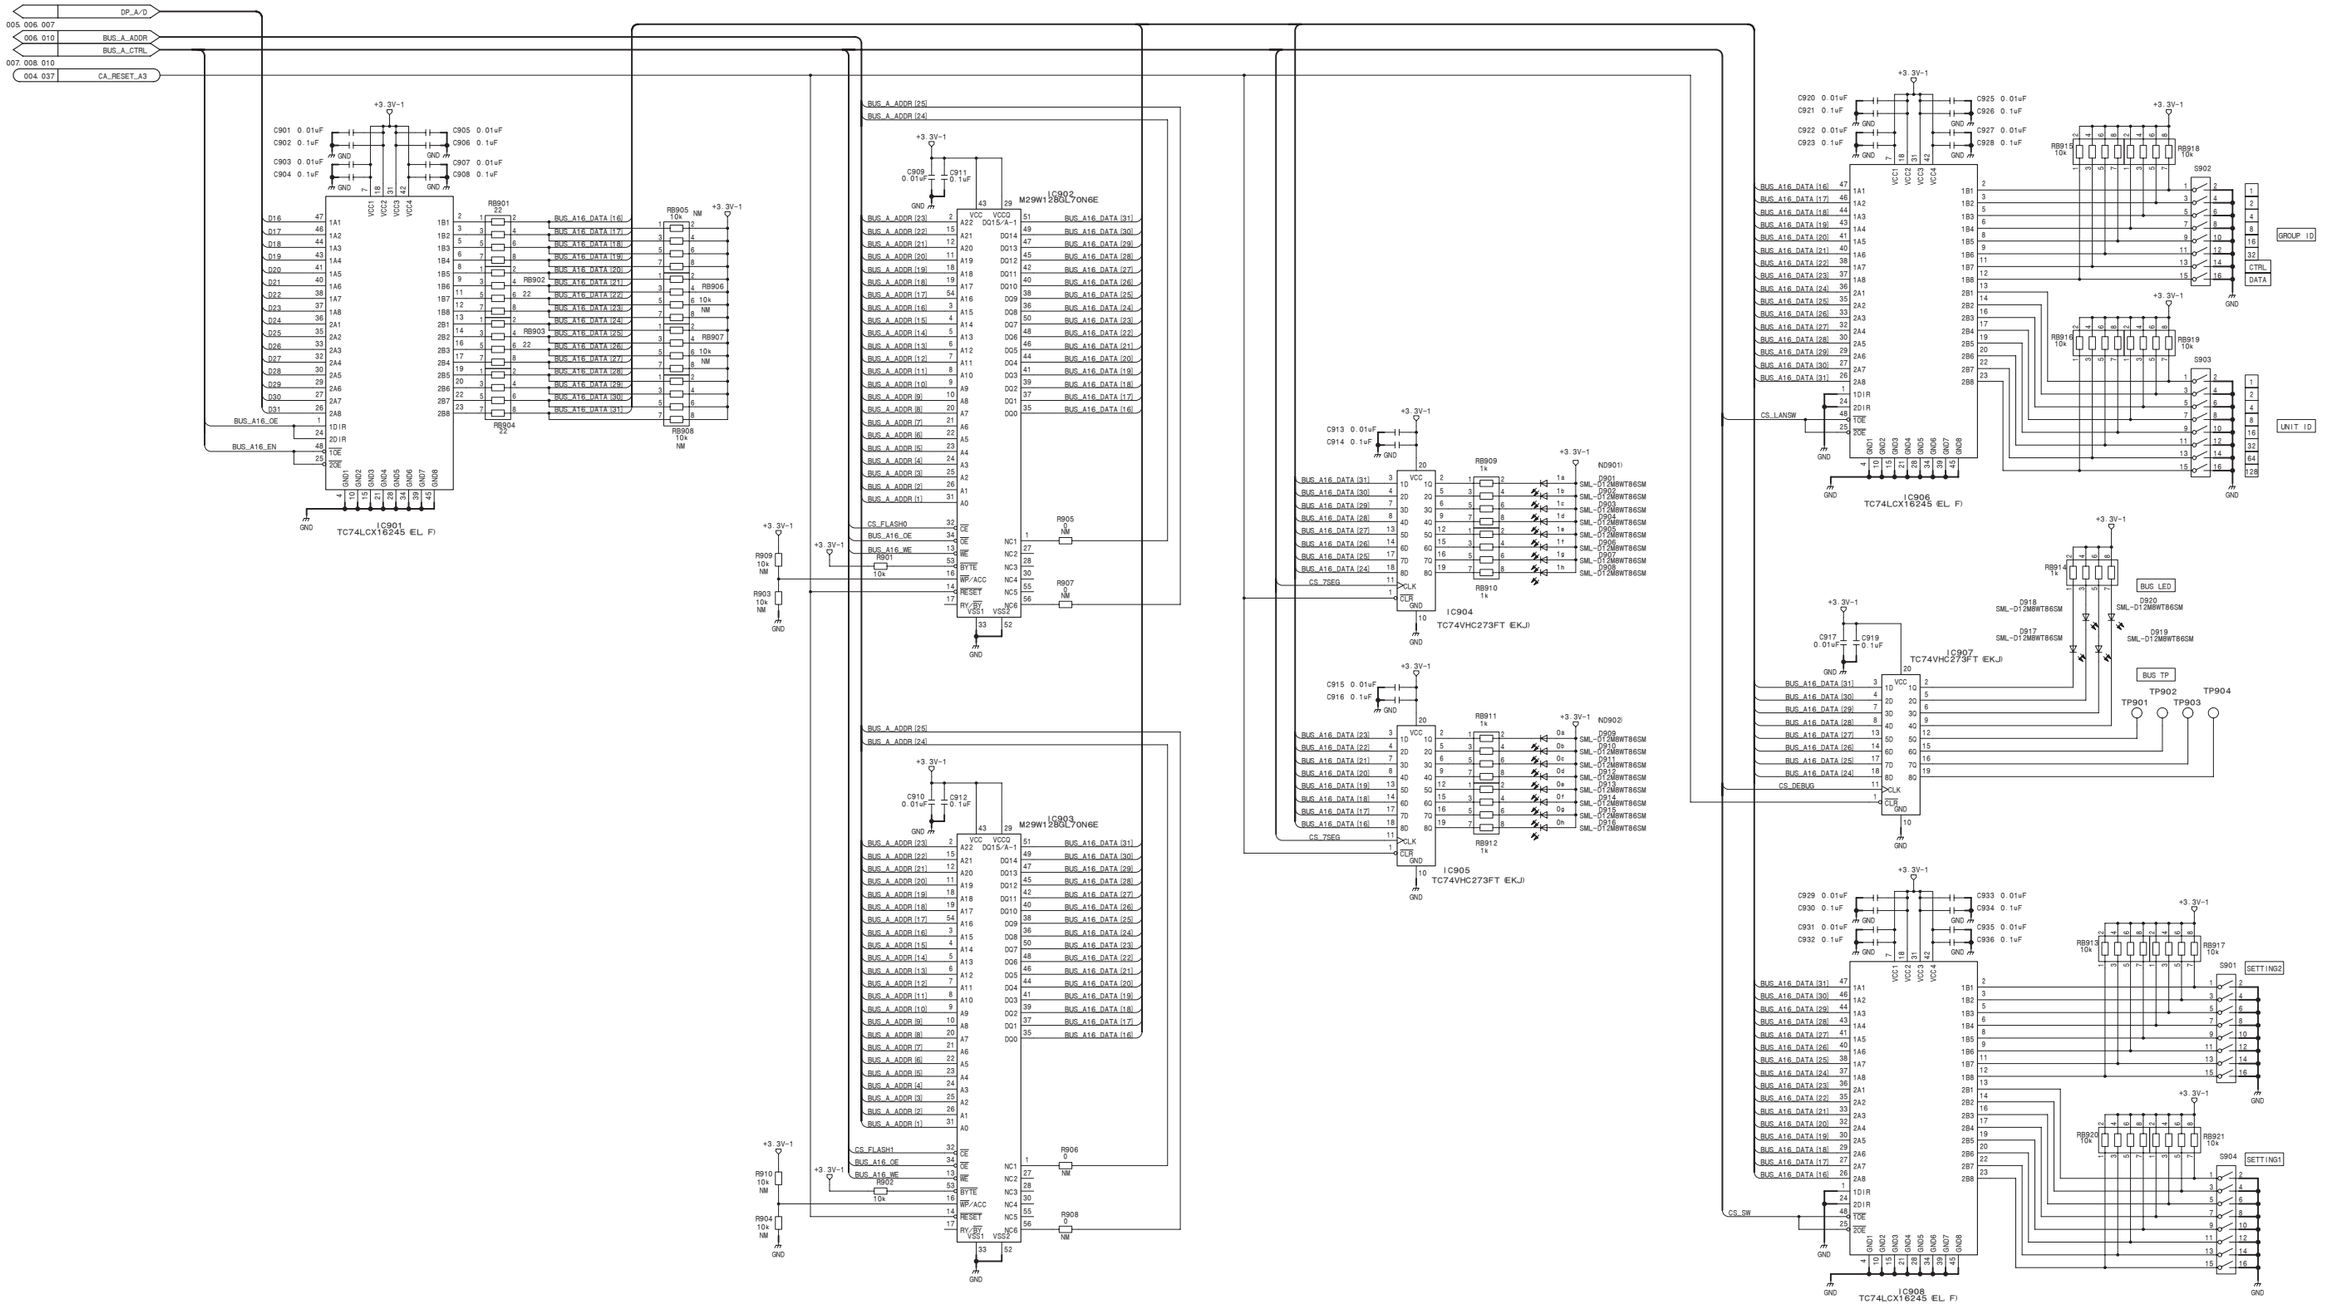

CA-82A (9/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_9

CA-82A (10/42)
SUFFIX: -14

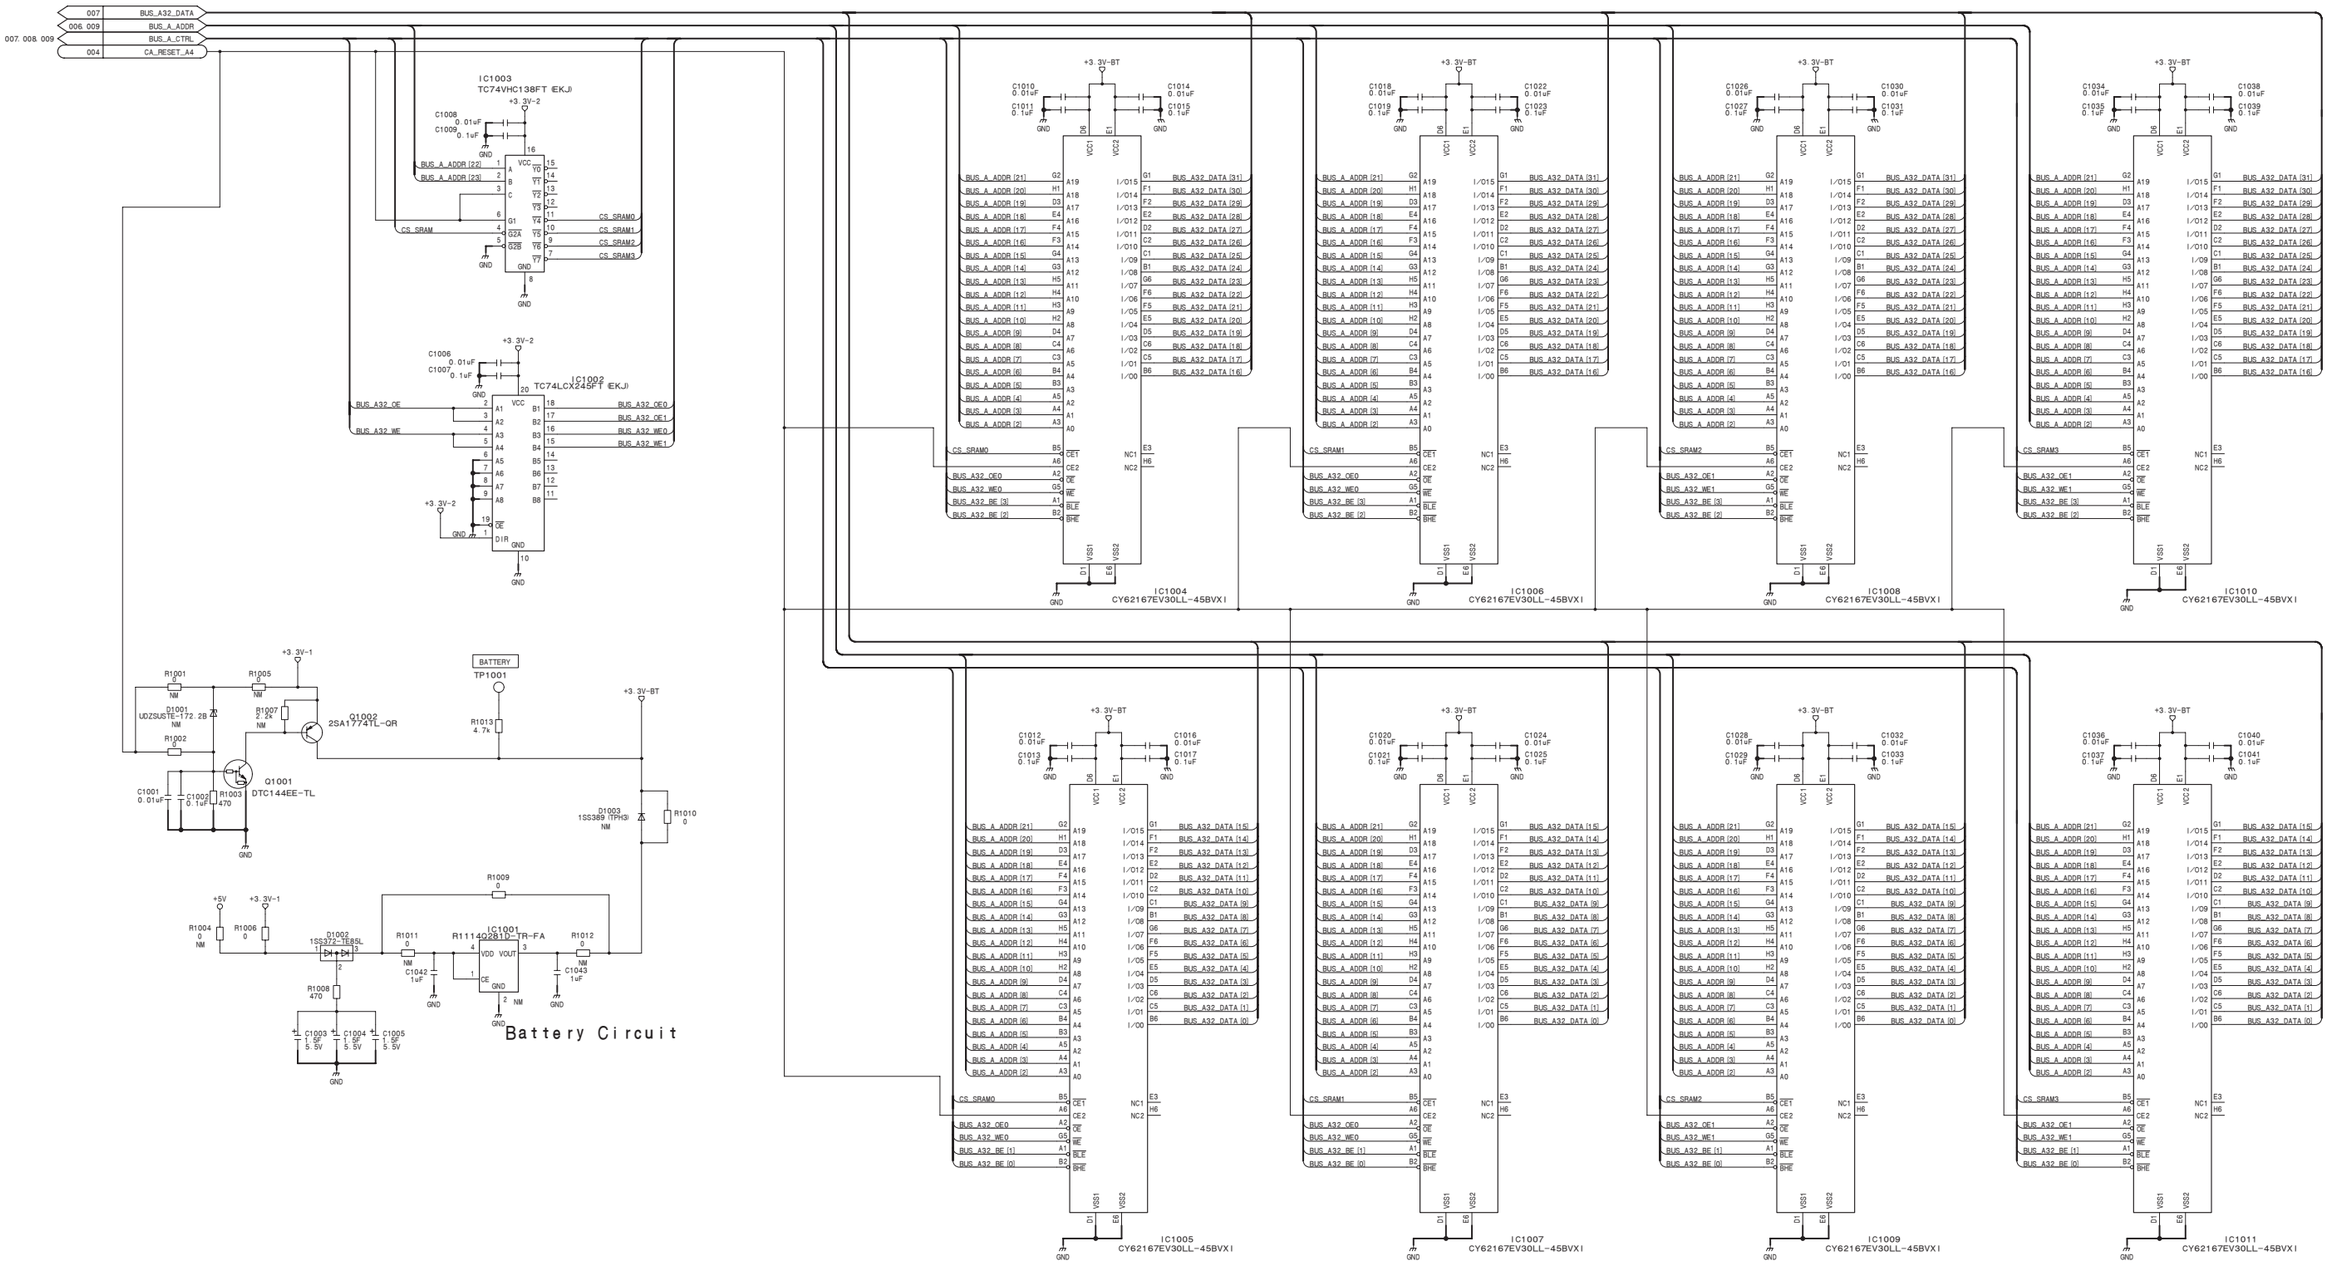

4-54

CA-82A (10/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_10

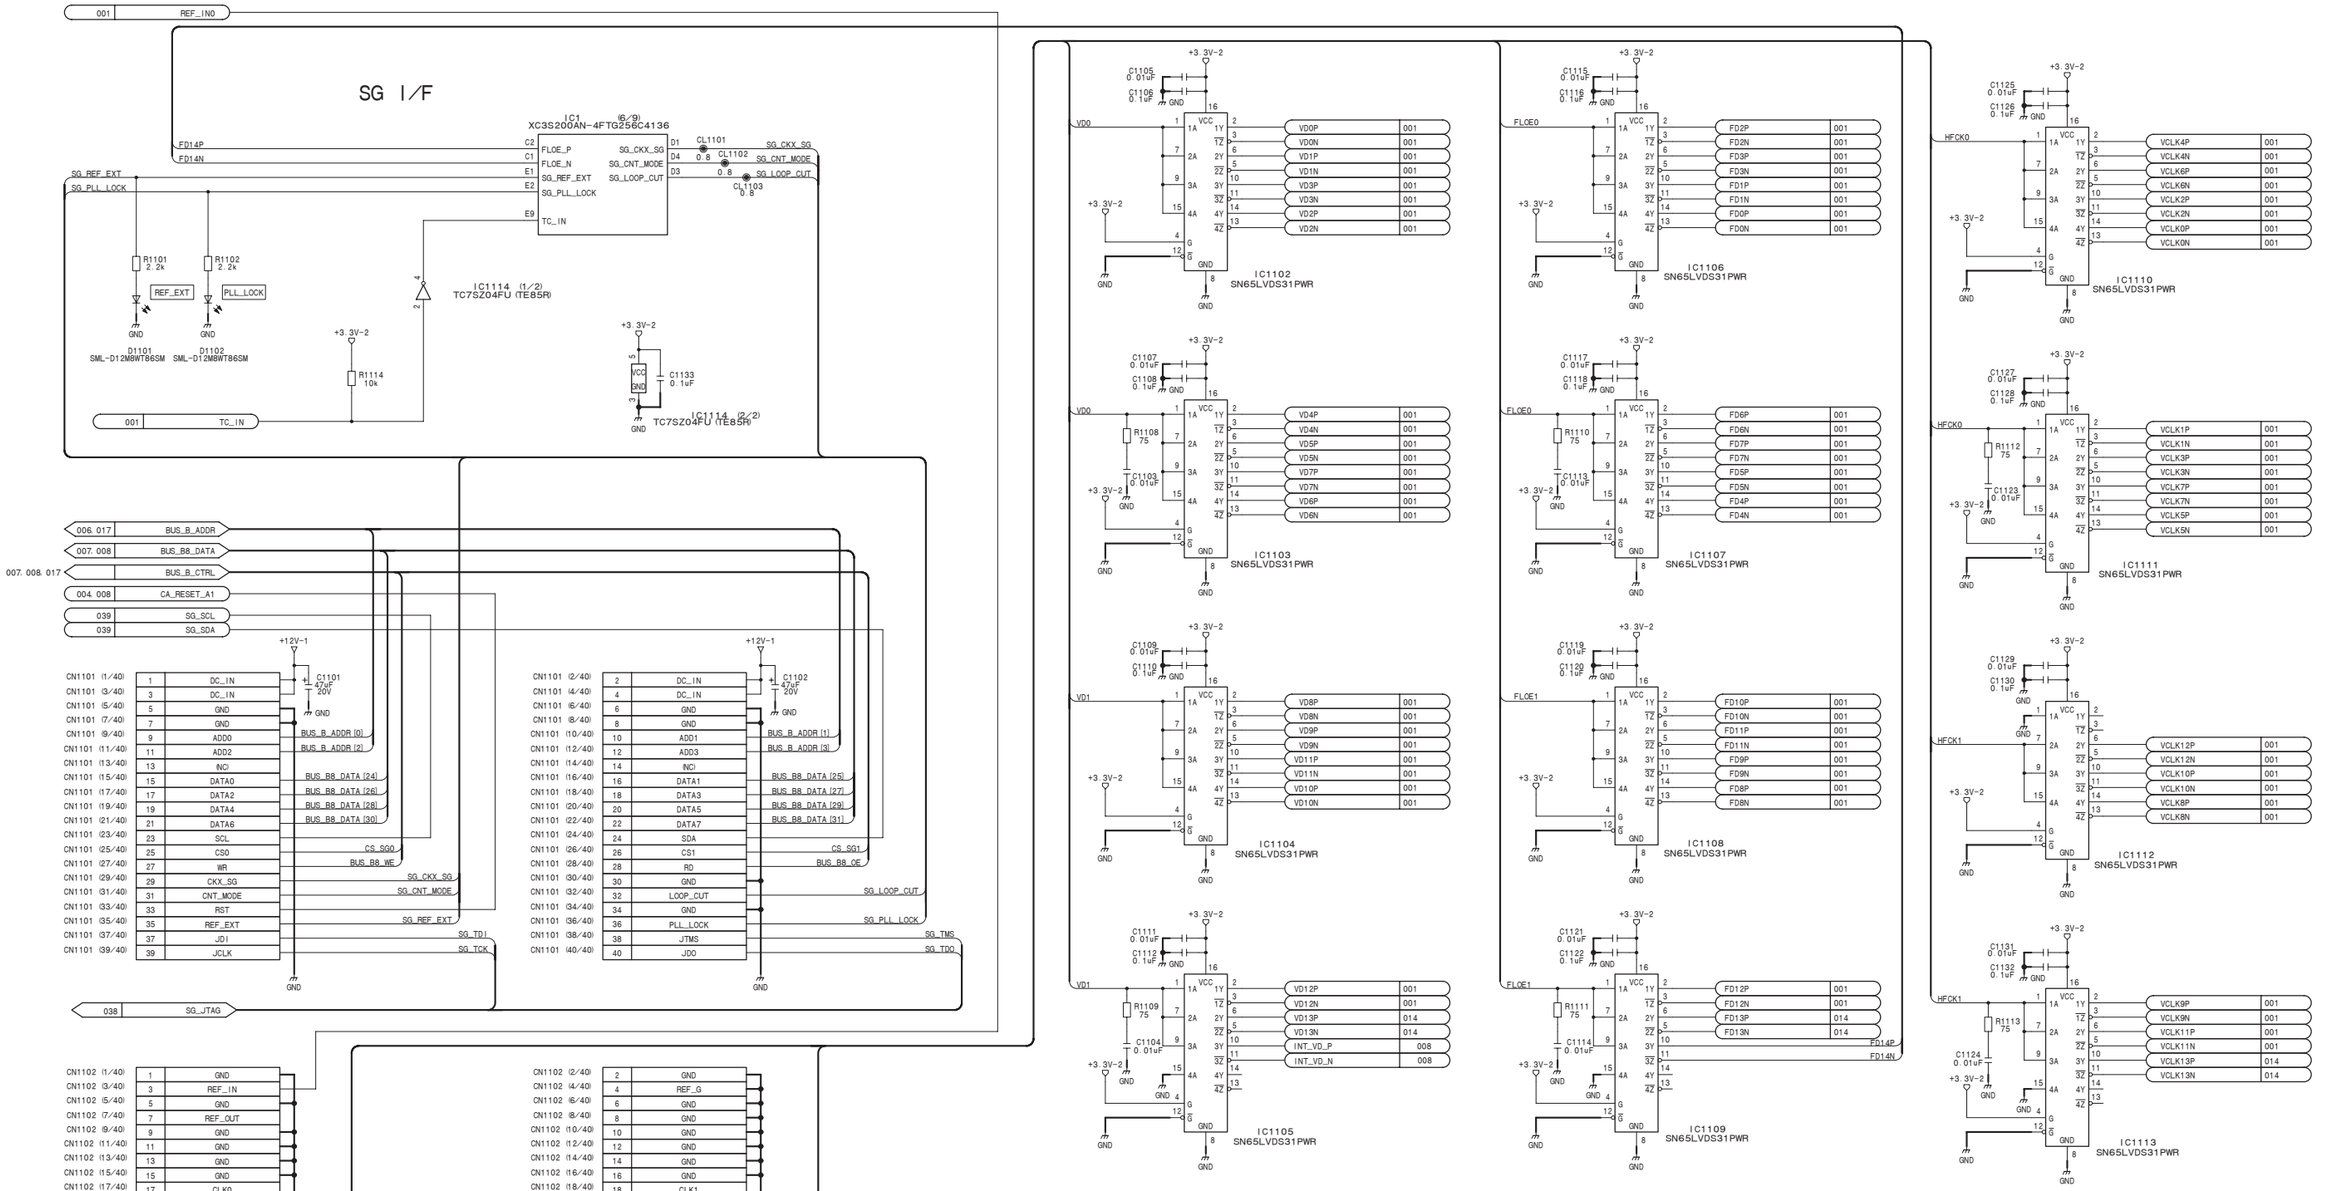

SG I/F

CA-82A (11/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_11

CA-82A (12/42)
SUFFIX: -14

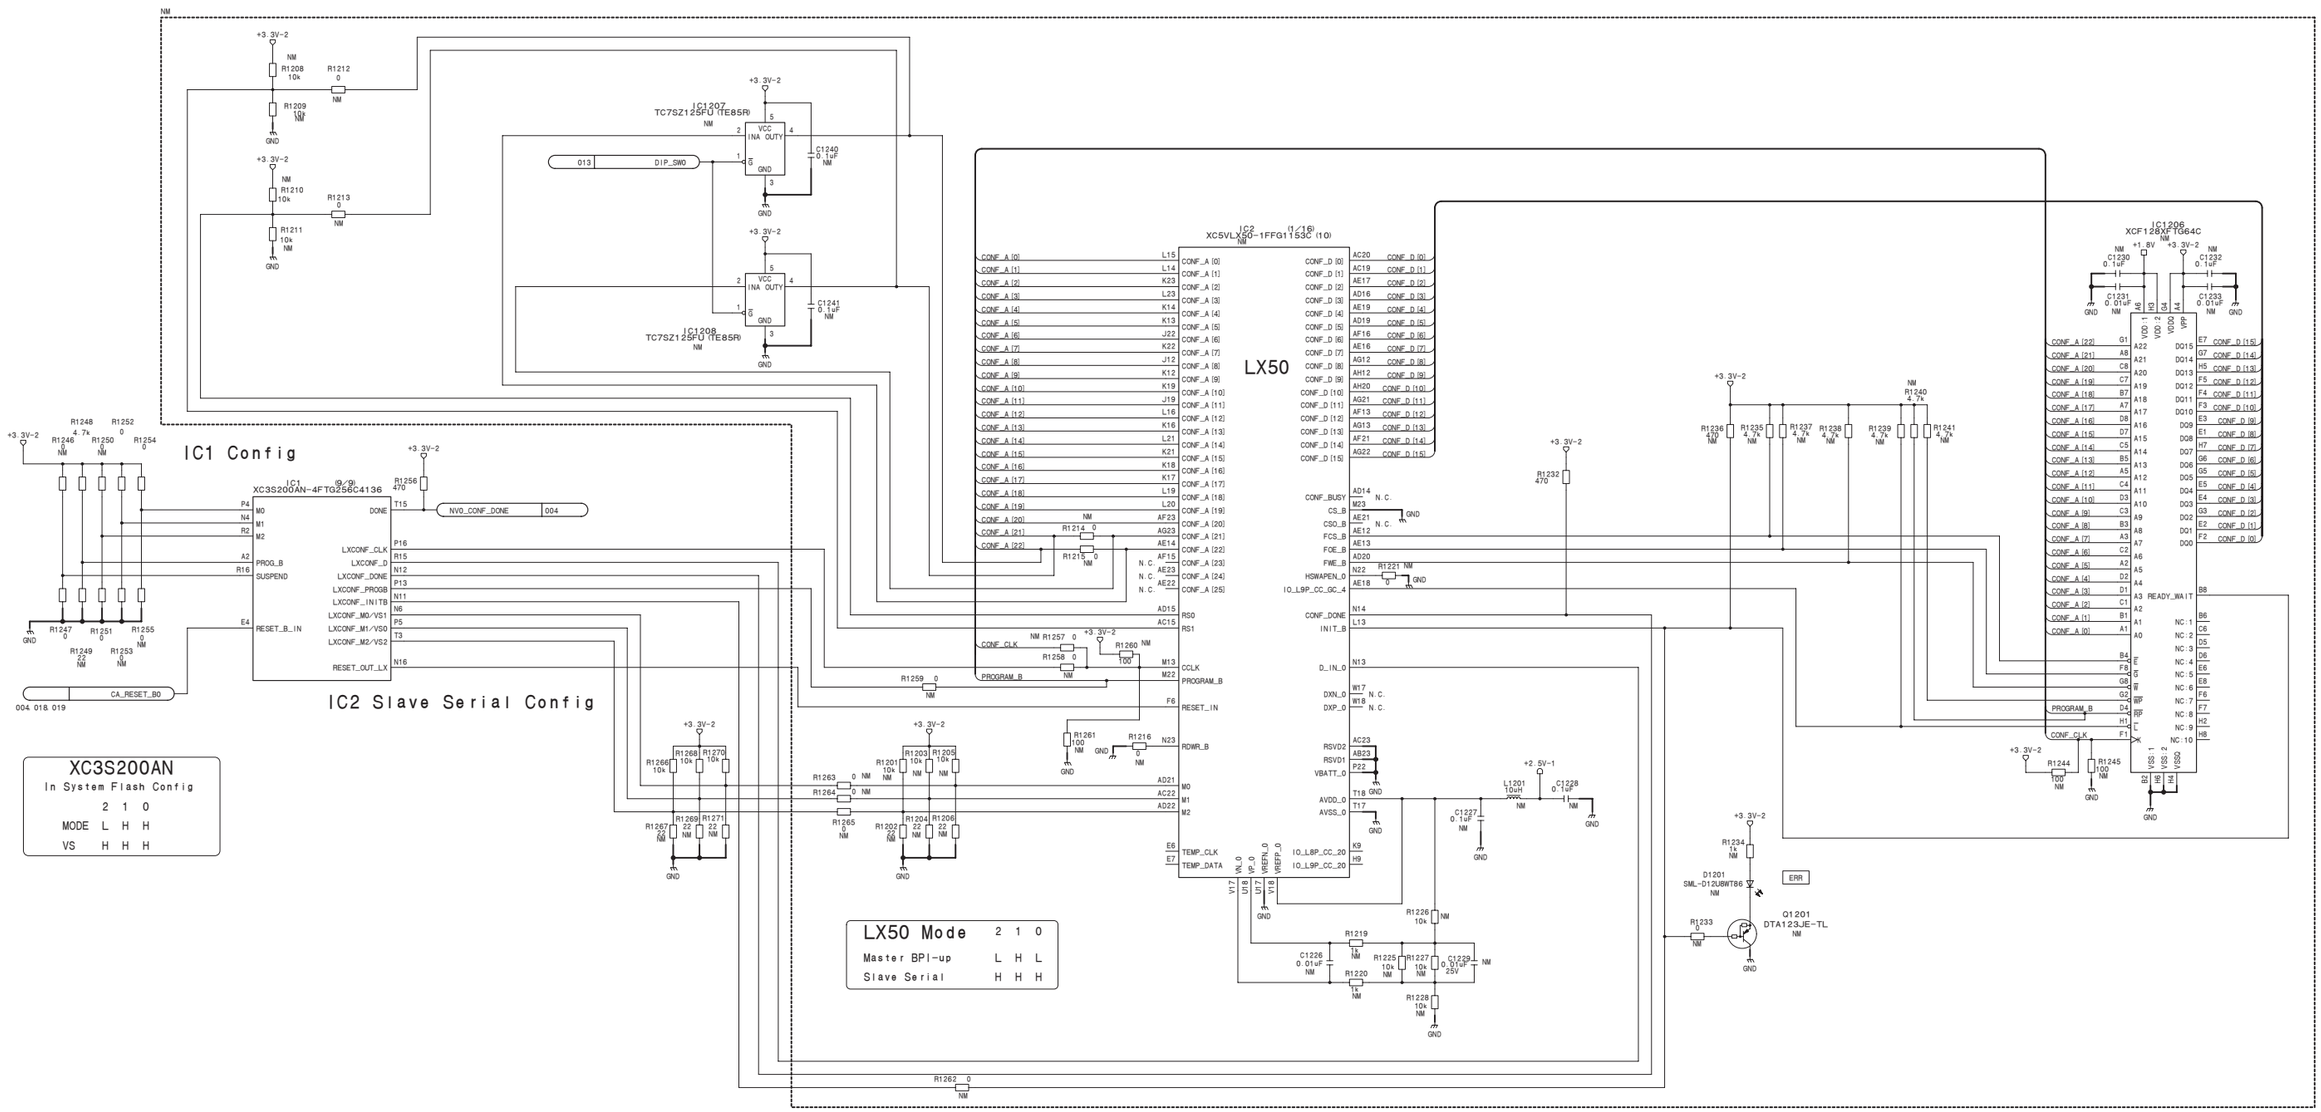

CA-82A (13/42) **SUFFIX: -14**

NM

IC2 (2/16) XC5VLX50-1FFG1153C (10) NM

GND

VCC INT

IC2 (4/16) XC5VLX50-1FFG1153C (10) NM

+1.0V

VCCAUX

IC2 (9/16) XC5VLX50-1FFG1153C (10) NM

+2.5V-1

VCC IO

IC2 (5/16) XC5VLX50-1FFG1153C (10) NM

+2.5V-1 +3.3V-2 +1.8V

MISC & CLK

IC2 (13/16) XC5VLX50-1FFG1153C (10) NM

DIP_SW0 012

LX_SET S1301

RB1301 10k RB1302 10k RB1303 1k RB1304 1k

CLK33M X1301 33.333MHz

LED0 LED1 LED2 LED3 LED4 LED5 LED6 LED7 LX50

NEP0_MCLK 022 NEP1_MCLK 023 NEP0_GTX_CLK 024 NEP1_GTX_CLK 025

Neptune & PHY Modified Clock

LX50 (2/5)
VCC & GND & MISC

CA-82A (13/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_13

CA-82A (14/42)
SUFFIX: -14

NM

Timing Packet I/F

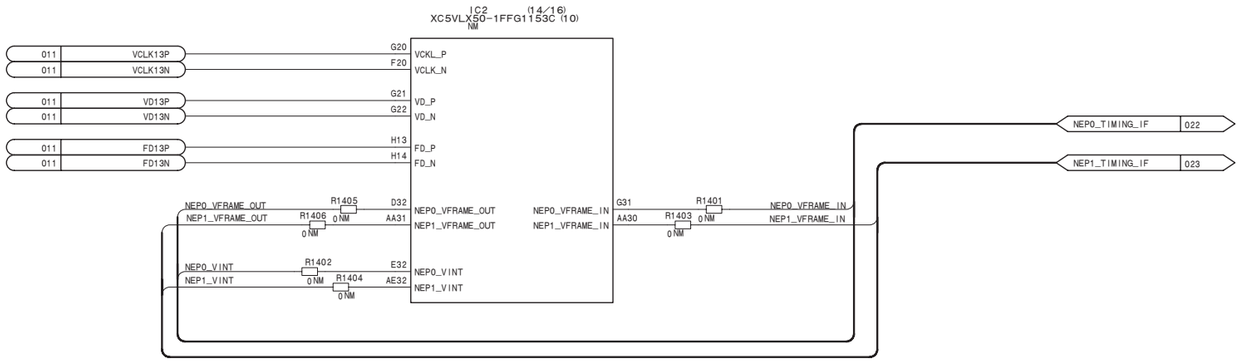

Local BUS I/F

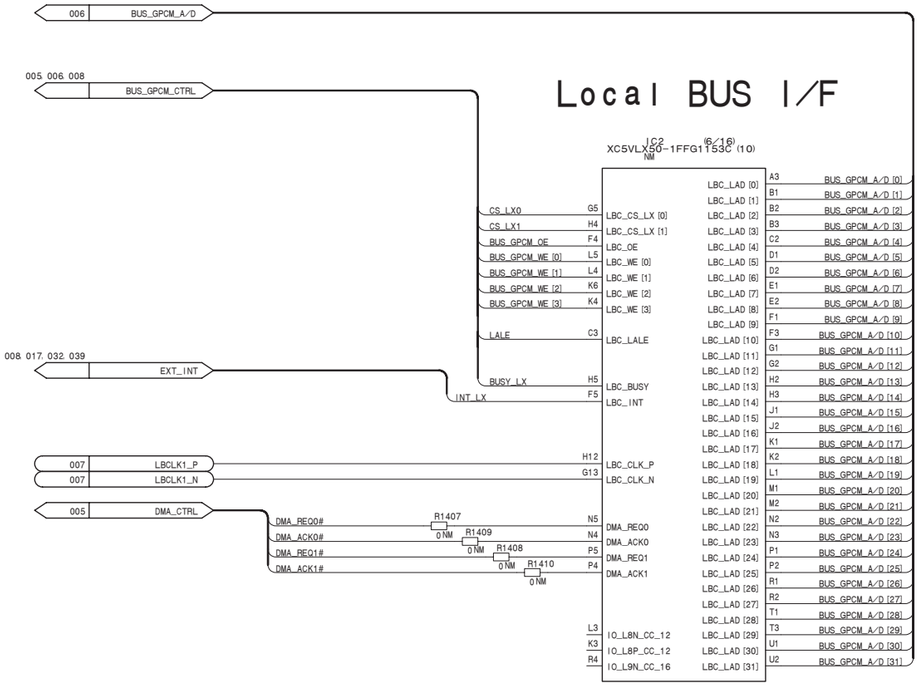

LX50 (3/5)
GPCM I/F & Timing Pkt I/F

CA-82A (14/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_14

CA-82A (15/42)
SUFFIX: -14

NM

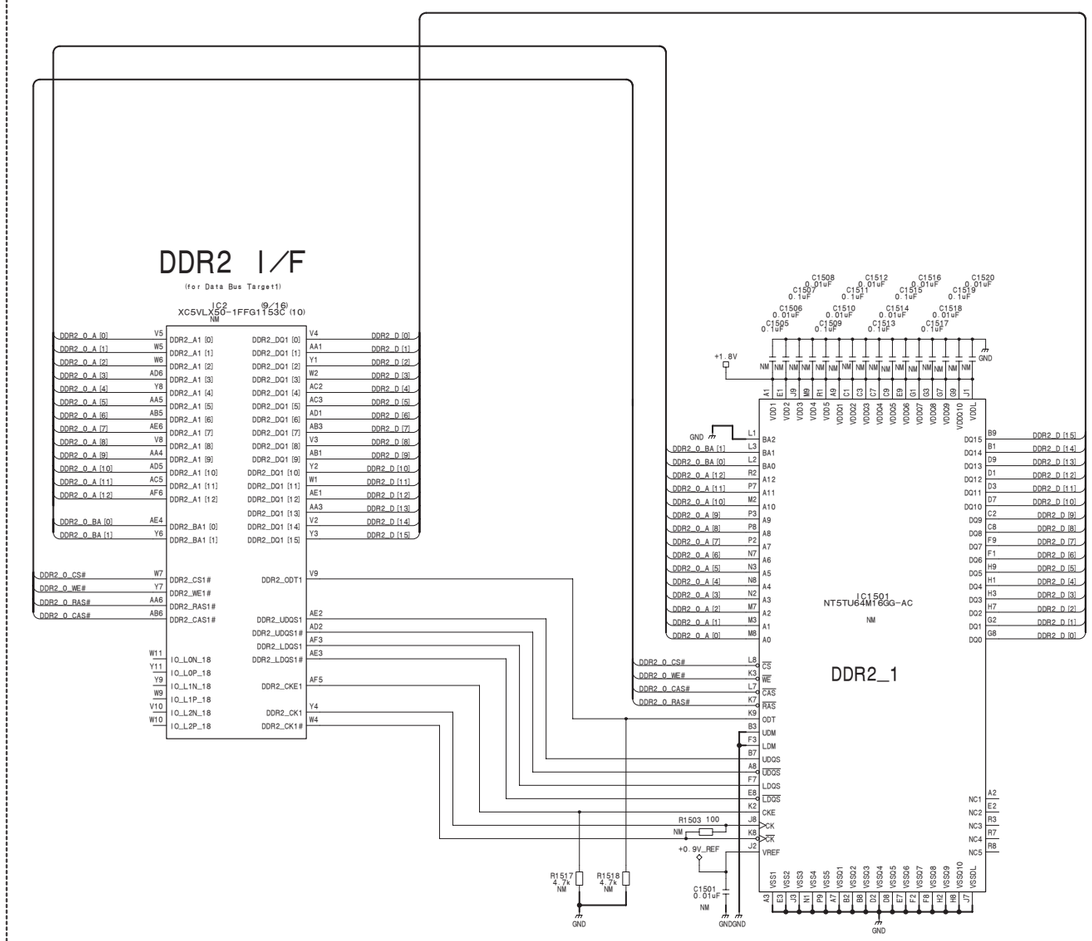

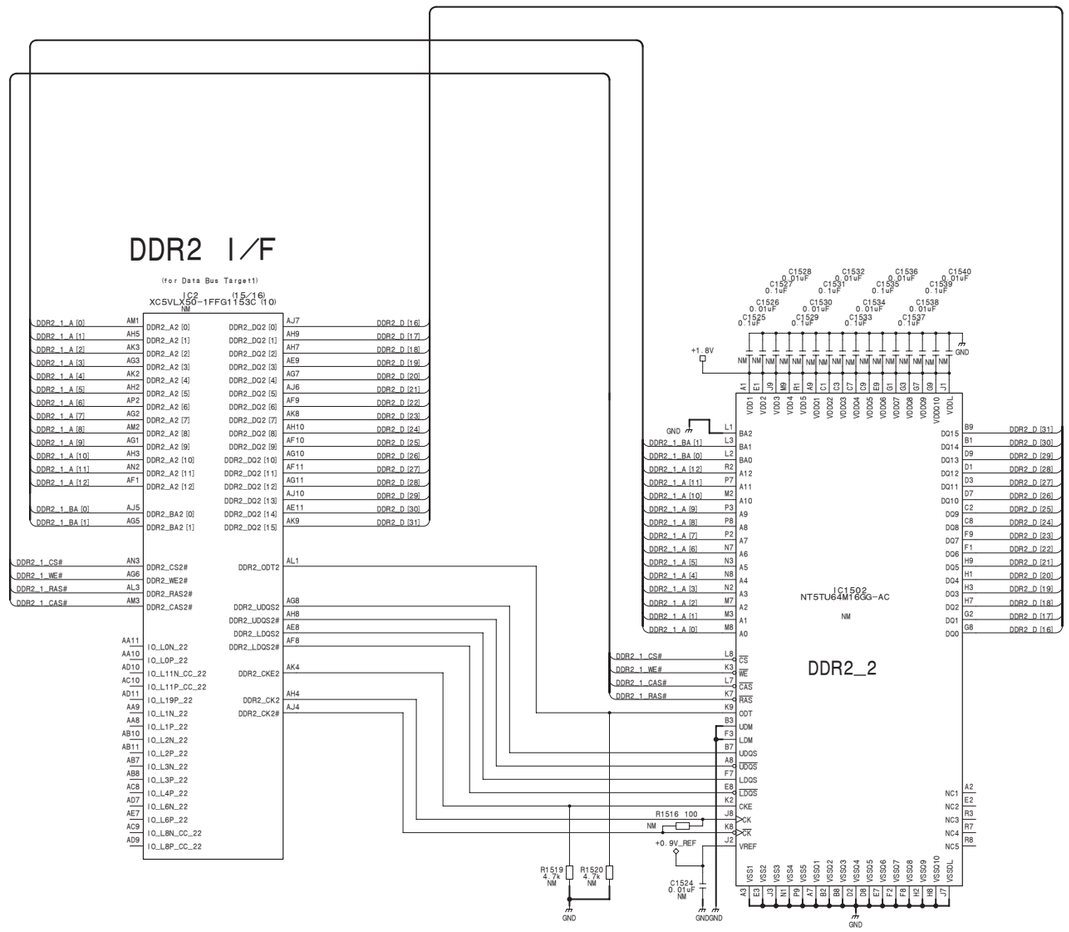

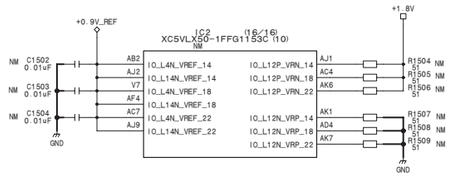



LX50 (4/5)
DDR2 I/F

CA-82A (15/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_15

A | B | C | D | E | F | G | H

CA-82A (16/42)
SUFFIX: -14

NM

NOT USED

IC2 (12/16)
XC5VLX50-1FFG1153C (10)
NM

AA25	IO_L0P_21	IO_L13P_20	K7
AA26	IO_L0N_21	IO_L0P_20	K11
AA28	IO_L5N_21	IO_L14N_VREF_19	K26
AA29	IO_L11P_CC_17	IO_L14P_19	K27
AB25	IO_L3P_21	IO_L13P_19	K28
AB26	IO_L3N_21	IO_L4P_15	K29
AC24	IO_L17N_21	IO_L11N_CC_SM14N_11	K32
AC25	IO_L17P_21	IO_L4P_16	L6
AC27	IO_L1N_21	IO_L8N_CC_20	L9
AD24	IO_L19P_21	IO_L4P_20	L11
AD25	IO_L18N_21	IO_L0N_19	L24
AD29	IO_L15N_17	IO_L1P_19	L25
AD30	IO_L13P_17	IO_L4N_VREF_15	L29
AD31	IO_L12P_VRN_17	IO_L7P_15	L30
AE24	IO_L19N_21	IO_L13P_12	M3
AF14	IO_L5N_GC_4	IO_L6P_16	M5
AF18	IO_L9N_CC_GC_4	IO_L4N_VREF_16	M6
AF19	IO_L8N_CC_GC_4	IO_L15N_20	M7
AF20	IO_L8P_CC_GC_4	IO_L6P_20	M11
AF24	IO_L13P_21	IO_L12N_VRP_19	M27
AF25	IO_L15P_21	IO_L15P_19	M28
AG16	IO_L7N_GC_VRP_4	IO_L16N_20	N7
AG17	IO_L7P_GC_VRN_4	IO_L17P_20	N9
AG25	IO_L13N_21	IO_L18N_19	N25
AG26	IO_L14N_VREF_21	IO_L12P_VRN_19	N27
AG30	IO_L19N_17	IO_L15N_19	N28
AG31	IO_L14N_VREF_17	IO_L11N_CC_16	P6
AG33	IO_L12P_VRN_13	IO_L16P_20	P7
AH19	IO_L6P_GC_4	IO_L18P_20	P9
AH25	IO_L12N_VRP_21	IO_L19P_20	P11
AH27	IO_L11P_CC_21	IO_L18P_19	P25
AJ19	IO_L4N_GC_VREF_4	IO_L16P_19	P26
AJ25	IO_L12P_VRN_21	IO_L16N_19	P27
AK19	IO_L4P_GC_4	IO_L15P_SM13P_11	P32
E3	IO_L4P_12	IO_L14N_VREF_12	R3
E4	IO_L3P_16	IO_L14P_16	R6
F8	IO_L7N_20	IO_L12N_VRP_16	R8
G3	IO_L6P_12	IO_L12P_VRN_16	R9
G7	IO_L14N_VREF_20	IO_L17P_16	R11
G25	IO_L5P_19	IO_L17P_15	R26
G26	IO_L5N_19	IO_L12P_VRN_15	R28
G30	IO_L1P_15	IO_L12N_VRP_15	R29
H7	IO_L12P_VRN_20	IO_L13N_15	R31
H15	IO_L4N_GC_VREF_3	IO_L10N_CC_16	T4
H18	IO_L0P_CC_GC_3	IO_L13N_16	T5
H19	IO_L1P_CC_GC_3	IO_L17N_16	T10
H20	IO_L1N_CC_GC_3	IO_L19N_16	T11
H23	IO_L9N_GC_3	IO_L19N_15	T25
J4	IO_L5N_16	IO_L18N_15	T26
J5	IO_L2P_16	IO_L19P_12	U3
J6	IO_L0P_16	IO_L10P_CC_16	U5
J7	IO_L13N_20	IO_L13P_16	U6
J9	IO_L2N_20	IO_L19P_15	U25
J11	IO_L0N_20	IO_L18P_15	U26
J15	IO_L2N_GC_VRP_3	IO_L2P_17	V25
J16	IO_L2P_GC_VRN_3	IO_L5N_17	V27
J17	IO_L0N_CC_GC_3	IO_L5P_17	V28
J21	IO_L3N_GC_3	IO_L4P_17	V30
J26	IO_L4N_VREF_19	IO_L2N_17	W25

NC PIN

IC2 (11/16)
XC5VLX50-1FFG1153C (10)
NM

B20	NC36	NC45	B31
A14	NC9	NC46	C4
AL30	NC172	NC210	AN22
AL6	NC153	NC224	AP11
D14	NC76	NC114	G12
AH23	NC128	NC142	AK13
C20	NC59	NC88	D29
A15	NC10	NC50	C9
AL29	NC171	NC185	AM18
AL5	NC152	NC183	AM16
D15	NC77	NC102	E24
AH22	NC127	NC161	AL16
A26	NC19	NC67	C30
A8	NC4	NC72	D9
AP25	NC235	NC207	AN18
AP10	NC223	NC182	AM15
H17	NC120	NC84	D24
AK16	NC144	NC160	AL15
B27	NC42	NC89	D30
B8	NC27	NC68	D4
AP26	NC236	NC232	AP21
AP9	NC222	NC204	AN14
G16	NC116	NC103	F11
AJ17	NC135	NC157	AL11
C25	NC63	NC90	D31
C10	NC51	NC69	D5
AL24	NC167	NC233	AP22
AM11	NC179	NC226	AP14
F21	NC110	NC113	G11
AK24	NC150	NC140	AK11
B25	NC40	NC44	B30
B10	NC28	NC71	D7
AL25	NC168	NC230	AP19
AN10	NC201	NC205	AN15
E21	NC99	NC119	G23
AL23	NC166	NC159	AL14
B28	NC43	NC22	A30
A6	NC3	NC70	D6
AP24	NC234	NC208	AN19
AN12	NC202	NC227	AP15
E14	NC94	NC112	F24
AK18	NC146	NC158	AL13
C29	NC66	NC15	A21
A5	NC2	NC53	C13
AN24	NC212	NC173	AL31
AM12	NC180	NC196	AN4
F15	NC106	NC91	E11
AK17	NC145	NC122	AH13
C27	NC64	NC37	B21
B7	NC26	NC54	C14
AM20	NC186	NC195	AM31
AM17	NC184	NC197	AN5
E23	NC101	NC75	D12
AL21	NC165	NC123	AH14
D26	NC86	NC57	C18
B6	NC25	NC55	C15
AM21	NC187	NC194	AM30
AN17	NC206	NC151	AL4
D22	NC83	NC79	D17
AL20	NC164	NC139	AJ24
A28	NC20	NC58	C19
A4	NC1	NC32	B15
AM23	NC189	NC217	AN30
AM13	NC181	NC174	AM5
F14	NC105	NC78	D16
AH18	NC126	NC129	AH24
A29	NC21	NC38	B22
B5	NC24	NC8	A13
AN23	NC211	NC240	AP31
AN13	NC203	NC218	AP4
G15	NC115	NC93	E13
AG18	NC121	NC124	AH15
D27	NC87	NC60	C22
C7	NC48	NC31	B13
AP20	NC231	NC239	AP30
AP17	NC229	NC219	AP5
F23	NC111	NC92	E12
AL19	NC163	NC132	AJ14
C28	NC65	NC12	A18
C8	NC49	NC11	A16
AN20	NC209	NC170	AL28
AP16	NC228	NC155	AL9
E22	NC100	NC108	F18
AL18	NC162	NC137	AJ21
A31	NC23	NC35	B18
C5	NC47	NC33	B16
AM22	NC188	NC192	AM27
AP12	NC225	NC154	AL8
F13	NC104	NC109	F19
AK12	NC141	NC138	AJ22

| | | |

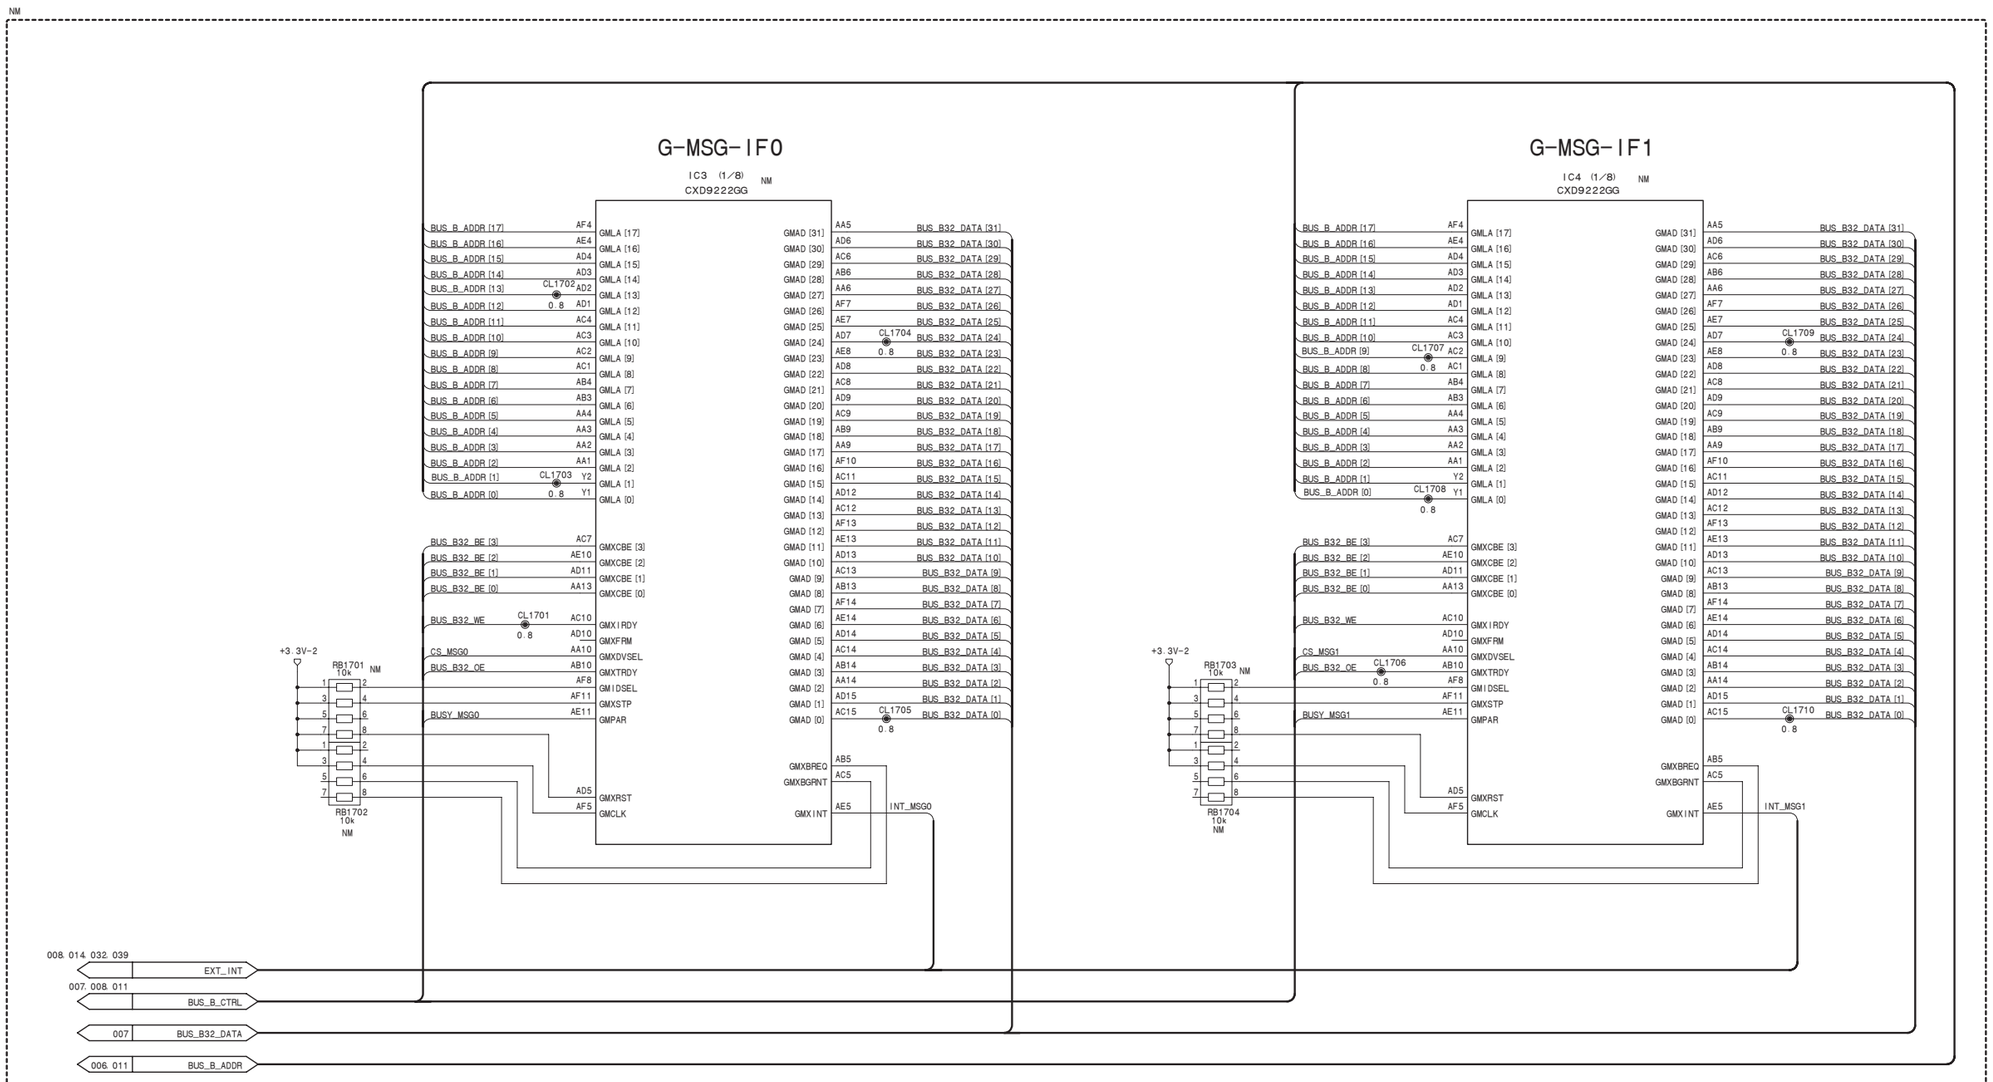

NEPTUNE0&1 (MSG I/F)

CA-82A (17/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_17

CA-82A (18/42)
SUFFIX: -14

NM

LX50 DATA0 I/F

IC2 (7/16)
XC5VLX50-1FFG1153C (10)
NM

NEPO_GRD0 P30
NEPO_GRD1 N33
NEPO_GRD2 N34
NEPO_GRD3 P34
NEPO_GRD4 R33
NEPO_GRD5 R34
NEPO_GRD6 T33
NEPO_GRD7 T34
NEPO_GRD8 T31
NEPO_GRD9 T29
NEPO_GRD10 T28
NEPO_GRD11 U32
NEPO_GRD12 U31
NEPO_GRD13 U30
NEPO_GRD14 U28
NEPO_GRD15 U27
NEPO_GRD16 R27
NEPO_GRD17 K33
NEPO_GRD18 U33
NEPO_GRD19 T30
NEPO_GRD20 R32
NEPO_GRD21 P29
NEPO_GRD22 M33
NEPO_GRD23 M30
NEPO_GRD24 P31
NEPO_GRD25 N29
NEPO_GRD26 N32
NEPO_GRD27 N30
NEPO_GRD28 M31
NEPO_GRD29 L33
NEPO_GRD30 L34
NEPO_GRD31 K34

NEPO_GRD [0] .. NEPO_GRD [31]
NEPO_GWD [0] .. NEPO_GWD [31]

B33 NEPO_GWD0
B32 NEPO_GWD1
C34 NEPO_GWD2
E33 NEPO_GWD3
F33 NEPO_GWD4
G33 NEPO_GWD5
H34 NEPO_GWD6
G32 NEPO_GWD7
C32 NEPO_GWD8
C33 NEPO_GWD9
D34 NEPO_GWD10
E34 NEPO_GWD11
F34 NEPO_GWD12
H33 NEPO_GWD13
J34 NEPO_GWD14
J32 NEPO_GWD15
E31 NEPO_GWD16
E29 NEPO_GWD17
F31 NEPO_GWD18
F30 NEPO_GWD19
F29 NEPO_GWD20
H30 NEPO_GWD21
H29 NEPO_GWD22
J31 NEPO_GWD23
J30 NEPO_GWD24
J29 NEPO_GWD25
E28 NEPO_GWD26
E27 NEPO_GWD27
E26 NEPO_GWD28
F26 NEPO_GWD29
F25 NEPO_GWD30
F28 NEPO_GWD31

J24 NEPO_GWBGRNT
H24 NEPO_GWHLE
H27 NEPO_GWRDY
H28 NEPO_GWREQ
J27 NEPO_GWTRM
H25 NEPO_GWVLD
J25 NEPO_GWBREQ

L28 NEPO_GRHLE
M25 NEPO_GRRDY
M26 NEPO_GRVLD

J20 NEPO_GDCRTN
M32 NEPO_CDCLK
L26 NEPO_GDACT

H32 I/O_L4N_VREF_11
G27 I/O_L8P_CC_19
L31 I/O_L9N_CC_15
G28 I/O_L9N_CC_19
K31 I/O_L9P_CC_15

K24 NEPO_RESET_L
NEPO_RESET 022

R1801 33 NM

004_012_019
CA_RESET_B0

FLASH0

IC1801 NM
MX29LV640EBTI-70G

+3.3V-2
C1801 0.1uF NM
GND

NEPO_GRD22 13
NEPO_GRD21 10
NEPO_GRD20 9
NEPO_GRD19 16
NEPO_GRD18 17
NEPO_GRD17 48
NEPO_GRD16 1
NEPO_GRD15 2
NEPO_GRD14 3
NEPO_GRD13 4
NEPO_GRD12 5
NEPO_GRD11 6
NEPO_GRD10 7
NEPO_GRD9 8
NEPO_GRD8 18
NEPO_GRD7 19
NEPO_GRD6 20
NEPO_GRD5 21
NEPO_GRD4 22
NEPO_GRD3 23
NEPO_GRD2 24
NEPO_GRD1 25

NEPO_GDACT 26
NEPO_GWHLE 28
NEPO_GWBREQ 11

+3.3V-2
R1813 0 NM
GND

VCC 37
VSS1 27
VSS2 46
GND

A21 A20 A19 A18 A17 A16 A15 A14 A13 A12 A11 A10 A9 A8 A7 A6 A5 A4 A3 A2 A1 A0
DQ14 DQ13 DQ12 DQ11 DQ10 DQ9 DQ8 DQ7 DQ6 DQ5 DQ4 DQ3 DQ2 DQ1 DQ0
DU15/A-1

45 NEPO_GWD15
43 NEPO_GWD14
41 NEPO_GWD13
39 NEPO_GWD12
36 NEPO_GWD11
34 NEPO_GWD10
32 NEPO_GWD9
30 NEPO_GWD8
44 NEPO_GWD7
42 NEPO_GWD6
40 NEPO_GWD5
38 NEPO_GWD4
35 NEPO_GWD3
33 NEPO_GWD2
31 NEPO_GWD1
29 NEPO_GWD0

OE
OE
WE
47 BYTE
14 WP/ACC
12 RESET
15 RY/BY

G-DATA-IF0

IC3 (2/8) NM
CXD9222GG

NEPO_GWD26 RB1801 33 NM 1 2 GWO_D26
NEPO_GWD30 3 4 GWO_D30
NEPO_GWD27 5 6 GWO_D27
NEPO_GWD31 7 8 GWO_D31
NEPO_GWD24 RB1802 33 NM 1 2 GWO_D24
NEPO_GWD28 3 4 GWO_D28
NEPO_GWD25 5 6 GWO_D25
NEPO_GWD29 7 8 GWO_D29
NEPO_GWD20 RB1803 33 NM 1 2 GWO_D20
NEPO_GWD21 3 4 GWO_D21
NEPO_GWD22 5 6 GWO_D22
NEPO_GWD23 7 8 GWO_D23
NEPO_GWD19 NM R1803 33
NEPO_GWD18 NM R1804 33
NEPO_GWD17 NM R1805 33
NEPO_GWD16 NM R1806 33
NEPO_GWD15 NM R1807 33
NEPO_GWD14 NM R1808 33
NEPO_GWD7 NM R1809 33

NEPO_GWD8 RB1804 33 NM 1 2 GWO_D8
NEPO_GWD1 3 4 GWO_D1
NEPO_GWD9 5 6 GWO_D9
NEPO_GWD2 7 8 GWO_D2
NEPO_GWD10 RB1805 33 NM 1 2 GWO_D10
NEPO_GWD3 3 4 GWO_D3
NEPO_GWD11 5 6 GWO_D11
NEPO_GWD4 7 8 GWO_D4
NEPO_GWTRM RB1806 33 NM 1 2 GWO_TRM
NEPO_GWVLD 3 4 GWO_VLD
NEPO_GWD0 5 6 GWO_D0
NEPO_GWREQ RB1807 33 NM 7 8 1 GWO_REQ
NEPO_GWBGRNT 4 3 GWO_B_GRNT
NEPO_GWBREQ 6 5 GWO_B_REC
NEPO_GWHLE 8 7 GWO_HLE
NEPO_GWD13 RB1808 33 NM 2 1 GWO_D13
NEPO_GWD6 4 3 GWO_D6
NEPO_GWD12 6 5 GWO_D12
NEPO_GWD5 8 7 GWO_D5

NEPO_GDACT R1810 33 NM
NEPO_GDCLK R1811 33 NM

+3.3V-2
R1816 0 NM
R1818 0 NM
R1817 0 NM
R1819 0 NM
GND

GWD [31] .. GWD [0]

AF23 GWO_D31
AF22 GWO_D30
AF20 GWO_D29
AF19 GWO_D28
AE23 GWO_D27
AE22 GWO_D26
AE20 GWO_D25
AE19 GWO_D24
AD26 GWO_D23
AD25 GWO_D22
AD24 GWO_D21
AD23 GWO_D20
AC19 GWO_D13
AC20 GWO_D12
AB22 GWO_D11
AB23 GWO_D10
AC24 GWO_D9
AB24 GWO_D8
AC21 GWO_D6
AC22 GWO_D5
AB21 GWO_D4
AA21 GWO_D3
AA22 GWO_D2
AA23 GWO_D1
AA24 GWO_D0
AA26 GWO_B_REC
Y25 GWO_B_GRNT
AA25 GWO_HLE
Y23 GWO_REQ
Y26 GWO_VLD
Y24 GWO_TRM

GWBREQ
GWBGRNT
GWHLE
GWRDY
GWREQ
GWVLD
GWTRM
GDACT
GDCLK
I/D [1]
I/D [0]

W24
V21
R26
W23
V24

GRD [31] .. GRD [0]

V26 GRO_D31
U26 GRO_D30
U25 GRO_D29
U24 GRO_D28
U23 GRO_D27
T24 GRO_D26
T23 GRO_D25
T22 GRO_D24
T21 GRO_D23
R25 GRO_D22
R24 GRO_D21
M24 GRO_D20
M23 GRO_D19
N23 GRO_D18
N24 GRO_D17
R23 GRO_D16
N26 GRO_D15
N25 GRO_D14
K23 GRO_D13
L24 GRO_D12
M26 GRO_D11
M25 GRO_D10
L23 GRO_D9
K24 GRO_D8
M22 GRO_D7
M21 GRO_D6
P21 GRO_D5
P22 GRO_D4
K26 GRO_D3
K25 GRO_D2
P23
P24 GRO_D0

GRHLE V22 GRO_HLE
GRRDY V25 GRO_RDY
GRVLD V23 GRO_VLD

+1.2V-1
FB1801 NM
C1802 1uF
C1803 1uF
K3 PLLVDDI1
PLLVSS1
K4
J3 PLLVDDIO
J4 PLLVSSO
GND

GRO_RDY 2 1 RB1815 33 NM 3 4 NEPO_GRRDY
GRO_D31 4 3 NEPO_GRD31
GRO_D29 6 5 NEPO_GRD29
GRO_D30 8 7 NEPO_GRD30
GRO_D22 2 1 RB1816 33 NM 3 4 NEPO_GRD22
GRO_D15 6 5 NEPO_GRD15
GRO_D14 8 7 NEPO_GRD14
GRO_VLD 2 1 RB1817 33 NM 3 4 NEPO_GRVLD
GRO_D23 4 3 NEPO_GRD23
GRO_HLE 6 5 NEPO_GRHLE
8 7 NEPO_GWRDY
GRO_D28 1 2 RB1809 33 NM 3 4 NEPO_GRD28
GRO_D27 3 4 NEPO_GRD27
GRO_D26 5 6 NEPO_GRD26
GRO_D25 7 8 NEPO_GRD25
GRO_D17 1 2 RB1810 33 NM 3 4 NEPO_GRD17
GRO_D18 3 4 NEPO_GRD18
GRO_D20 5 6 NEPO_GRD20
GRO_D19 7 8 NEPO_GRD19
GRO_D8 1 2 RB1811 33 NM 3 4 NEPO_GRD8
GRO_D9 3 4 NEPO_GRD9
GRO_D12 5 6 NEPO_GRD12
GRO_D13 7 8 NEPO_GRD13
GRO_D2 1 2 RB1812 33 NM 3 4 NEPO_GRD2
GRO_D3 3 4 NEPO_GRD3
GRO_D10 5 6 NEPO_GRD10
GRO_D11 7 8 NEPO_GRD11
GRO_D4 1 2 RB1813 33 NM 3 4 NEPO_GRD4
GRO_D5 3 4 NEPO_GRD5
GRO_D6 5 6 NEPO_GRD6
GRO_D7 7 8 NEPO_GRD7
GRO_D21 1 2 RB1814 33 NM 3 4 NEPO_GRD21
GRO_D24 3 4 NEPO_GRD24
GRO_D0 5 6 NEPO_GRD0
GRO_D16 7 8 NEPO_GRD16
NEPO_GRD1
R1812 33 NM

NEPTUNE0 (DATA I/F)

4-62

A B C D E F G H

NM

LX50 DATA1 I/F

IC2 (8/16)
XC5VLX50-1FFG1153C (10)
NM

NEP1_GRD0	AH30	NEP1_GRD [0]	NEP1_GWD [0]	V33	NEP1_GWD0
NEP1_GRD1	AF34	NEP1_GRD [1]	NEP1_GWD [1]	W34	NEP1_GWD1
NEP1_GRD2	AF33	NEP1_GRD [2]	NEP1_GWD [2]	Y33	NEP1_GWD2
NEP1_GRD3	AH34	NEP1_GRD [3]	NEP1_GWD [3]	AA33	NEP1_GWD3
NEP1_GRD4	AH33	NEP1_GRD [4]	NEP1_GWD [4]	AC34	NEP1_GWD4
NEP1_GRD5	AJ34	NEP1_GRD [5]	NEP1_GWD [5]	AD34	NEP1_GWD5
NEP1_GRD6	AK34	NEP1_GRD [6]	NEP1_GWD [6]	AE33	NEP1_GWD6
NEP1_GRD7	AK33	NEP1_GRD [7]	NEP1_GWD [7]	AC29	NEP1_GWD7
NEP1_GRD8	AM33	NEP1_GRD [8]	NEP1_GWD [8]	V32	NEP1_GWD8
NEP1_GRD9	AN33	NEP1_GRD [9]	NEP1_GWD [9]	Y34	NEP1_GWD9
NEP1_GRD10	AN32	NEP1_GRD [10]	NEP1_GWD [10]	AA34	NEP1_GWD10
NEP1_GRD11	AP32	NEP1_GRD [11]	NEP1_GWD [11]	AB33	NEP1_GWD11
NEP1_GRD12	AJ31	NEP1_GRD [12]	NEP1_GWD [12]	AC33	NEP1_GWD12
NEP1_GRD13	AJ30	NEP1_GRD [13]	NEP1_GWD [13]	AE34	NEP1_GWD13
NEP1_GRD14	AK31	NEP1_GRD [14]	NEP1_GWD [14]	AC28	NEP1_GWD14
NEP1_GRD15	AJ27	NEP1_GRD [15]	NEP1_GWD [15]	AD32	NEP1_GWD15
NEP1_GRD16	AJ29	NEP1_GRD [16]	NEP1_GWD [16]	AB27	NEP1_GWD16
NEP1_GRD17	AJ26	NEP1_GRD [17]	NEP1_GWD [17]	AB28	NEP1_GWD17
NEP1_GRD18	AL34	NEP1_GRD [18]	NEP1_GWD [18]	AC30	NEP1_GWD18
NEP1_GRD19	AN34	NEP1_GRD [19]	NEP1_GWD [19]	AC32	NEP1_GWD19
NEP1_GRD20	AL33	NEP1_GRD [20]	NEP1_GWD [20]	Y28	NEP1_GWD20
NEP1_GRD21	AF29	NEP1_GRD [21]	NEP1_GWD [21]	AB30	NEP1_GWD21
NEP1_GRD22	AK27	NEP1_GRD [22]	NEP1_GWD [22]	AB32	NEP1_GWD22
NEP1_GRD23	AE31	NEP1_GRD [23]	NEP1_GWD [23]	AB31	NEP1_GWD23
NEP1_GRD24	AH29	NEP1_GRD [24]	NEP1_GWD [24]	W30	NEP1_GWD24
NEP1_GRD25	AF30	NEP1_GRD [25]	NEP1_GWD [25]	W31	NEP1_GWD25
NEP1_GRD26	AE29	NEP1_GRD [26]	NEP1_GWD [26]	W26	NEP1_GWD26
NEP1_GRD27	AG32	NEP1_GRD [27]	NEP1_GWD [27]	Y32	NEP1_GWD27
NEP1_GRD28	AF31	NEP1_GRD [28]	NEP1_GWD [28]	W29	NEP1_GWD28
NEP1_GRD29	AK28	NEP1_GRD [29]	NEP1_GWD [29]	W27	NEP1_GWD29
NEP1_GRD30	AM32	NEP1_GRD [30]	NEP1_GWD [30]	Y31	NEP1_GWD30
NEP1_GRD31	AK29	NEP1_GRD [31]	NEP1_GWD [31]	Y29	NEP1_GWD31
			NEP1_GWGRNT	AD26	NEP1_GWBGRNT
			NEP1_GWHLE	AE27	NEP1_GWHLE
NEP1_GRHLE	AF28	NEP1_GRHLE	NEP1_GWRDY	Y26	NEP1_GWRDY
NEP1_GRRDY	AG27	NEP1_GRRDY	NEP1_GWREQ	Y27	NEP1_GWREQ
NEP1_GRVLD	AG28	NEP1_GRVLD	NEP1_GWTRM	AE26	NEP1_GWTRM
			NEP1_GWVLD	AE28	NEP1_GWVLD
			NEP1_GWBREQ	AD27	NEP1_GWBREQ
	AG15	NEP1_GDCRTN	NEP1_CDCLK	AJ32	NEP1_GDCLK
			NEP1_GDACT	AF26	NEP1_GDACT
	AH32	IO_L14N_VREF_13	NEP1_RESET_L	W32	NEP1_RESET 023
	AK32	IO_L15N_13			
	AH28	IO_L6N_21			
	V29	IO_L7N_17			
	AK26	IO_L8P_CC_21			

R1901 33 NM

004_012_018 CA_RESET_B0

FLASH1

IC1901 NM
MX29LV640EBTI-70G
+3.3V-2

C1901 0.1uF NM

NEP1_GRD22	13	A21	45 NEP1_GWD15
NEP1_GRD21	10	A20	DQ14 43 NEP1_GWD14
NEP1_GRD20	9	A19	DQ13 41 NEP1_GWD13
NEP1_GRD19	16	A18	DQ12 39 NEP1_GWD12
NEP1_GRD18	17	A17	DQ11 36 NEP1_GWD11
NEP1_GRD17	48	A16	DQ10 34 NEP1_GWD10
NEP1_GRD16	1	A15	DQ9 32 NEP1_GWD9
NEP1_GRD15	2	A14	DQ8 30 NEP1_GWD8
NEP1_GRD14	3	A13	DQ7 44 NEP1_GWD7
NEP1_GRD13	4	A12	DQ6 42 NEP1_GWD6
NEP1_GRD12	5	A11	DQ5 40 NEP1_GWD5
NEP1_GRD11	6	A10	DQ4 38 NEP1_GWD4
NEP1_GRD10	7	A9	DQ3 35 NEP1_GWD3
NEP1_GRD9	8	A8	DQ2 33 NEP1_GWD2
NEP1_GRD8	18	A7	DQ1 31 NEP1_GWD1
NEP1_GRD7	19	A6	DQ0 29 NEP1_GWD0
NEP1_GRD6	20	A5	
NEP1_GRD5	21	A4	
NEP1_GRD4	22	A3	
NEP1_GRD3	23	A2	
NEP1_GRD2	24	A1	
NEP1_GRD1	25	A0	
NEP1_GDACT	26	CE	
NEP1_GWHLE	28	OE	
NEP1_GWBREQ	11	WE	
	47	BYTE	
	14	WP/ACC	
	12	RESET	
	15	RY/BY	
		VSS1 27	VSS2 46

+3.3V-2
R1913 0 NM
GND GND

G-DATA-IF1

IC4 (2/8) NM
CXD9222GG

NEP1_GWD26	RB1901 33 NM	GW1_D26	GW1_D31	AF23	GWD [31]
NEP1_GWD30		GW1_D30	GW1_D30	AF22	GWD [30]
NEP1_GWD27		GW1_D27	GW1_D29	AF20	GWD [29]
NEP1_GWD31		GW1_D31	GW1_D28	AF19	GWD [28]
NEP1_GWD24	RB1902 33 NM	GW1_D24	GW1_D27	AE23	GWD [27]
NEP1_GWD28		GW1_D28	GW1_D26	AE22	GWD [26]
NEP1_GWD25		GW1_D25	GW1_D25	AE20	GWD [25]
NEP1_GWD29		GW1_D29	GW1_D24	AE19	GWD [24]
NEP1_GWD20	RB1903 33 NM	GW1_D20	GW1_D23	AD26	GWD [23]
NEP1_GWD21		GW1_D21	GW1_D22	AD25	GWD [22]
NEP1_GWD22		GW1_D22	GW1_D21	AD24	GWD [21]
NEP1_GWD23	R1903 NM	GW1_D23	GW1_D20	AD23	GWD [20]
NEP1_GWD19	33			AD22	GWD [19]
NEP1_GWD18	NM R1904 33			AD21	GWD [18]
NEP1_GWD17	NM R1905 33			AD20	GWD [17]
NEP1_GWD16	NM R1906 33			AD19	GWD [16]
NEP1_GWD15	NM R1907 33			AC26	GWD [15]
NEP1_GWD14	NM R1908 33			AC23	GWD [14]
NEP1_GWD7	NM R1909 33			AC19	GWD [13]
NEP1_GWD8	RB1904 33 NM	GW1_D8	GW1_D13	AC20	GWD [12]
NEP1_GWD1		GW1_D1	GW1_D12	AB22	GWD [11]
NEP1_GWD9		GW1_D9	GW1_D11	AB23	GWD [10]
NEP1_GWD2		GW1_D2	GW1_D10	AC24	GWD [9]
NEP1_GWD10	RB1905 33 NM	GW1_D10	GW1_D9	AB24	GWD [8]
NEP1_GWD3		GW1_D3	GW1_D8	AC25	GWD [7]
NEP1_GWD11		GW1_D11	GW1_D6	AC21	GWD [6]
NEP1_GWD4	RB1906 33 NM	GW1_D4	GW1_D5	AC22	GWD [5]
NEP1_GWTRM		GW1_TRM	GW1_D4	AB21	GWD [4]
NEP1_GWVLD		GW1_VLD	GW1_D3	AA21	GWD [3]
NEP1_GWD0		GW1_D0	GW1_D2	AA22	GWD [2]
NEP1_GWREQ	RB1907 33 NM	GW1_REQ	GW1_D1	AA23	GWD [1]
NEP1_GWBGRNT		GW1_B_GRNT	GW1_D0	AA24	GWD [0]
NEP1_GWBREQ		GW1_B_REC	GW1_B_REC	AA26	GWBREQ
NEP1_GWHLE		GW1_HLE	GW1_B_GRNT	Y25	GWBGRNT
NEP1_GWD13	RB1908 33 NM	GW1_D13	GW1_HLE	AA25	GWHLE
NEP1_GWD6		GW1_D6		Y23	GWRDY
NEP1_GWD12		GW1_D12	GW1_REQ	Y26	GWREQ
NEP1_GWD5		GW1_D5	GW1_VLD	Y24	GWVLD
			GW1_TRM	W24	GWTRM
NEP1_GDACT	R1910 33 NM			V21	GDACT
NEP1_GDCLK	R1911 33 NM			R26	GDCLK
				W23	ID [1]
				V24	ID [0]

			GR1_RDY	V26	GRD [31]
			GR1_D31	U26	GRD [30]
			GR1_D29	U25	GRD [29]
			GR1_D30	U24	GRD [28]
				U23	GRD [27]
			GR1_D22	T24	GRD [26]
			GR1_D15	T23	GRD [25]
			GR1_D14	T22	GRD [24]
			GR1_VLD	T21	GRD [23]
			GR1_D23	R25	GRD [22]
			GR1_HLE	R24	GRD [21]
				M24	GRD [20]
			GR1_D28	M23	GRD [19]
			GR1_D27	N23	GRD [18]
			GR1_D26	N24	GRD [17]
			GR1_D25	R23	GRD [16]
			GR1_D17	N26	GRD [15]
			GR1_D18	N25	GRD [14]
			GR1_D20	K23	GRD [13]
			GR1_D19	L24	GRD [12]
			GR1_D8	M26	GRD [11]
			GR1_D9	M25	GRD [10]
			GR1_D12	L23	GRD [9]
			GR1_D13	K24	GRD [8]
			GR1_D2	M22	GRD [7]
			GR1_D3	M21	GRD [6]
			GR1_D10	P21	GRD [5]
			GR1_D11	P22	GRD [4]
			GR1_D4	K26	GRD [3]
			GR1_D5	K25	GRD [2]
			GR1_D6	P23	GRD [1]
			GR1_D7	P24	GRD [0]
			GR1_D21		
			GR1_D24		
			GR1_D0		
			GR1_D16		
GRHLE			GR1_HLE	V22	
GRRDY			GR1_RDY	V25	
GRVLD			GR1_VLD	V23	

RB1915 33 NM
RB1916 33 NM
RB1917 33 NM
RB1909 33 NM
RB1910 33 NM
RB1911 33 NM
RB1912 33 NM
RB1913 33 NM
RB1914 33 NM
R1912 33 NM

+1.2V-1
FB1901 NM
C1902 0.1uF NM
C1903 1uF NM
PLLVDDI1 K3
PLLVSS1 K4
PLLVDDIO J3
PLLVSSO J4
GND

+3.3V-2
R1916 0 NM
R1918 0 NM
R1917 0 NM
R1919 0 NM
GND

NEPTUNE1 (DATA I/F)

CA-82A (19/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_19

CA-82A (20/42)
SUFFIX: -14

NM

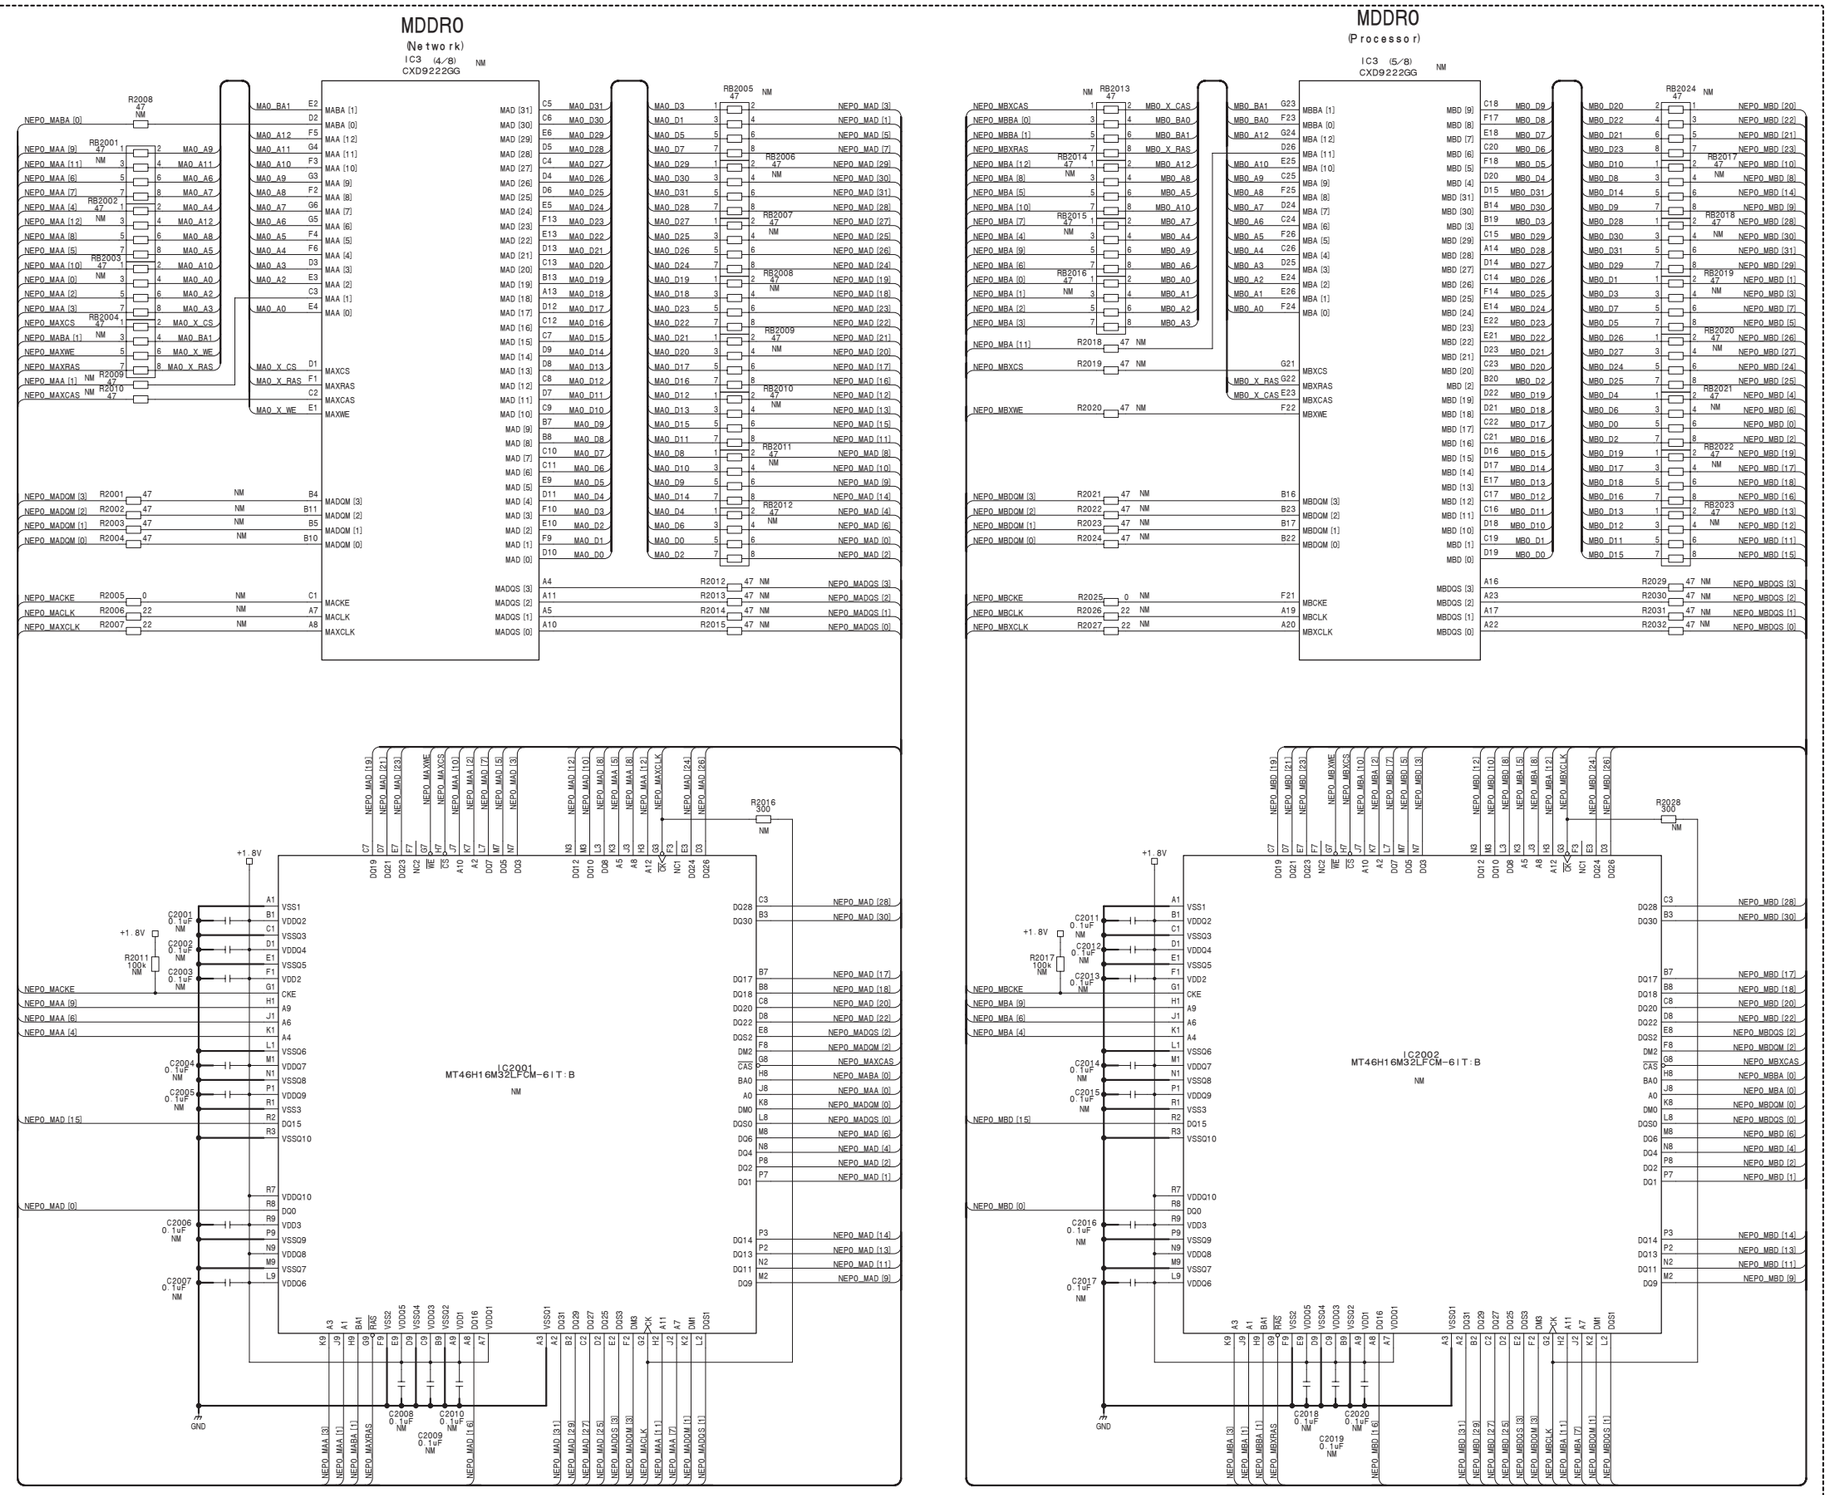

CA-82A (20/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_20

CA-82A (21/42)
SUFFIX: -14

NM

MDDR1
(Network)
IC4 (4/8) NM
CXD9222GG

MDDR1
(Processor)
IC4 (5/8) NM
CXD9222GG

IC2101
MT46H16M32LFCM-6 IT:B
NM

IC2102
MT46H16M32LFCM-6 IT:B
NM

NEPTUNE1 MDDR

CA-82A (21/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_21

CA-82A (22/42) **SUFFIX: -14**

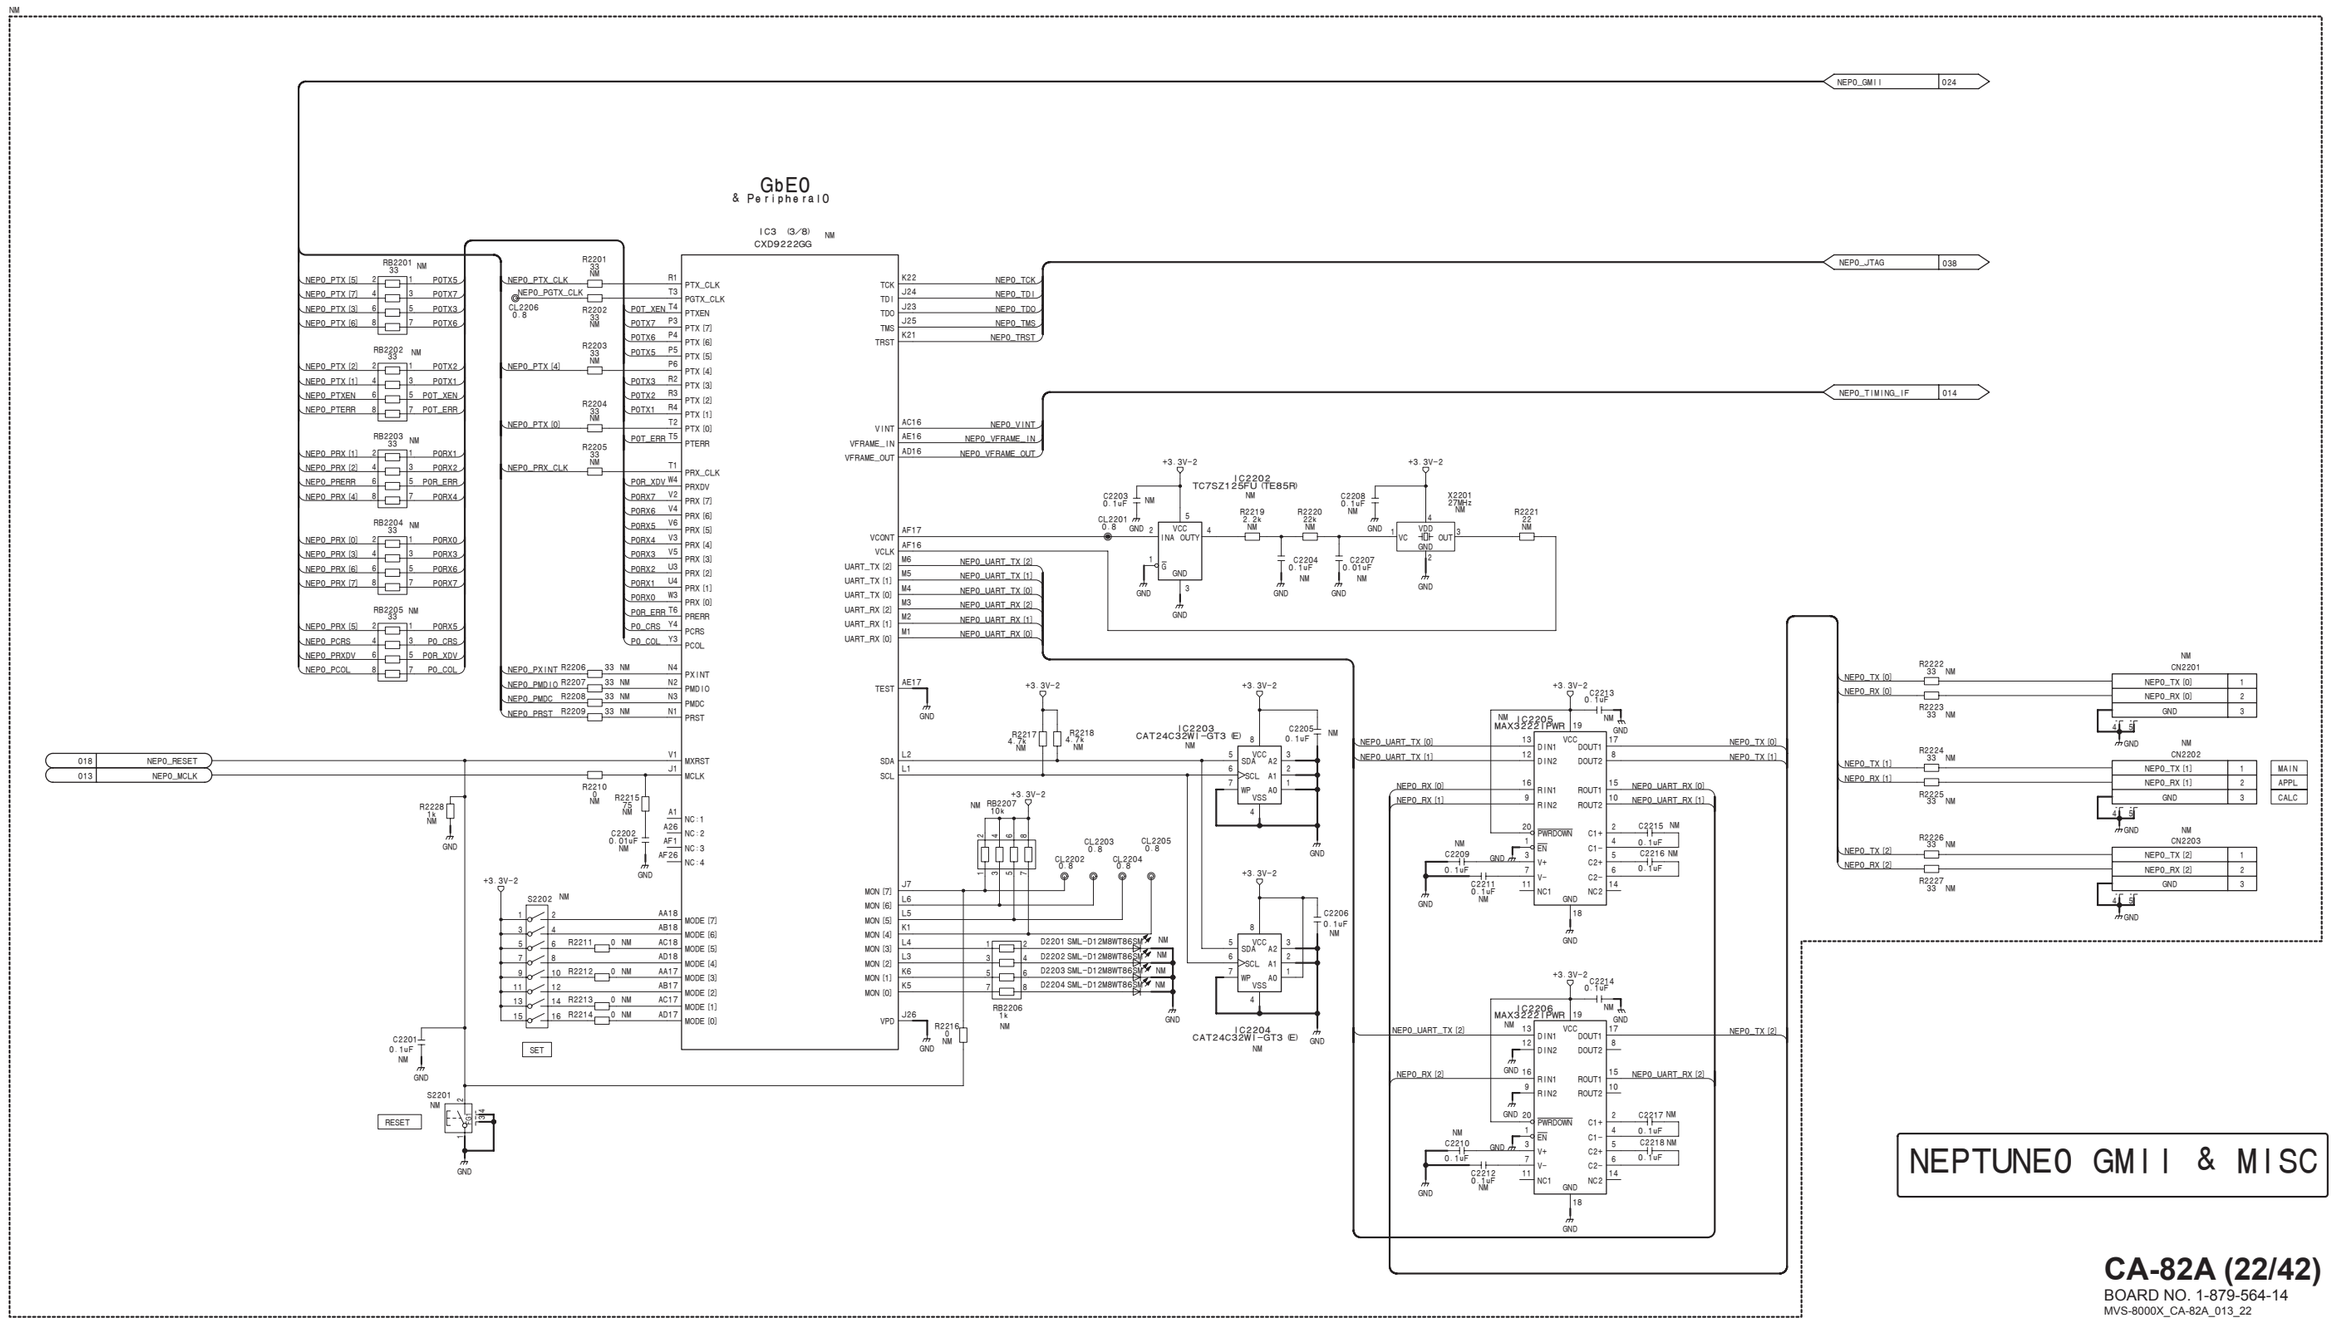

CA-82A (23/42) SUFFIX: -14

NM

GbE1
& Peripheral1

IC4 (3/8) NM
CXD9222GG

NEP1_GMII 025
NEP1_JTAG 038
NEP1_TIMING_IF 014

RB2301 33 NM
NEP1_PTX [5] P1TX5
NEP1_PTX [7] P1TX7
NEP1_PTX [3] P1TX3
NEP1_PTX [6] P1TX6

RB2302 33 NM
NEP1_PTX [2] P1TX2
NEP1_PTX [1] P1TX1
NEP1_PTXEN P1T_XEN
NEP1_PTERR P1T_ERR

RB2303 33 NM
NEP1_PRX [1] P1RX1
NEP1_PRX [2] P1RX2
NEP1_PRERR P1R_ERR
NEP1_PRX [4] P1RX4

RB2304 33 NM
NEP1_PRX [0] P1RX0
NEP1_PRX [3] P1RX3
NEP1_PRX [6] P1RX6
NEP1_PRX [7] P1RX7

RB2305 33 NM
NEP1_PRX [5] P1RX5
NEP1_PCRS P1_CRS
NEP1_PRXDV P1R_XDV
NEP1_PCOL P1_COL

R2301 33 NM NEP1_PTX_CLK
R2302 33 NM NEP1_PGTX_CLK
CL2306 0.8
R2303 33 NM NEP1_PTX [4]
R2304 33 NM NEP1_PTX [0]
R2305 33 NM NEP1_PRX_CLK
R2306 33 NM NEP1_PXINT
R2307 33 NM NEP1_PMDIO
R2308 33 NM NEP1_PMDC
R2309 33 NM NEP1_PRST

PTX_CLK R1
PGTX_CLK T3
PTXEN T4
PTX [7] P3
PTX [6] P4
PTX [5] P5
PTX [4] P6
PTX [3] R2
PTX [2] R3
PTX [1] R4
PTX [0] T2
PTERR T5
PRX_CLK T1
PRXDV W4
PRX [7] V2
PRX [6] V4
PRX [5] V6
PRX [4] V3
PRX [3] V5
PRX [2] U3
PRX [1] U4
PRX [0] W3
PRERR T6
PCRS Y4
PCOL Y3
PXINT N4
PMDIO N2
PMDC N3
PRST N1

019 NEP1_RESET
013 NEP1_MCLK
MXRST V1
MCLK J1
NC:1 A1
NC:2 A26
NC:3 AF1
NC:4 AF26

R2310 0 NM
R2315 75 NM
C2302 0.01uF NM
R2328 1k NM

S2302 NM
R2311 0 NM
R2312 0 NM
R2313 0 NM
R2314 0 NM
SET
MODE [7] AA18
MODE [6] AB18
MODE [5] AC18
MODE [4] AD18
MODE [3] AA17
MODE [2] AB17
MODE [1] AC17
MODE [0] AD17

C2301 0.1uF NM
S2301 NM
RESET

TCK K22 NEP1_TCK
TDI J24 NEP1_TDI
TDO J23 NEP1_TDO
TMS J25 NEP1_TMS
TRST K21 NEP1_TRST

VINT AC16 NEP1_VINT
VFRAME_IN AE16 NEP1_VFRAME_IN
VFRAME_OUT AD16 NEP1_VFRAME_OUT

VCONT AF17
VCLK AF16
UART_TX [2] M6 NEP1_UART_TX [2]
UART_TX [1] M5 NEP1_UART_TX [1]
UART_TX [0] M4 NEP1_UART_TX [0]
UART_RX [2] M3 NEP1_UART_RX [2]
UART_RX [1] M2 NEP1_UART_RX [1]
UART_RX [0] M1 NEP1_UART_RX [0]

TEST AE17

SDA L2
SCL L1

MON [7] J7
MON [6] L6
MON [5] L5
MON [4] K1
MON [3] L4
MON [2] L3
MON [1] K6
MON [0] K5
VPD J26

IC2302 TC7SZ125FU (TE85R) NM
C2303 0.1uF NM
CL2301 0.8
R2319 2.2k NM
R2320 22k NM
C2304 0.1uF NM
C2307 0.01uF NM
C2308 0.1uF NM
X2301 27MHz NM
R2321 22 NM

IC2303 CAT24C32WI-GT3 (E) NM
R2317 4.7k NM
R2318 4.7k NM
C2305 0.1uF NM
RB2307 10k NM
CL2302 0.8
CL2303 0.8
CL2304 0.8
RB2306 1k NM
D2301 SML-D12M8WT86SM NM
D2302 SML-D12M8WT86SM NM
D2303 SML-D12M8WT86SM NM
D2304 SML-D12M8WT86SM NM
IC2304 CAT24C32WI-GT3 (E) NM
C2306 0.1uF NM
R2316 0 NM

+3.3V-2
GND

R2322 33 NM NEP1_TX [0]
R2323 33 NM NEP1_RX [0]
R2324 33 NM NEP1_TX [1]
R2325 33 NM NEP1_RX [1]
R2326 33 NM NEP1_TX [2]
R2327 33 NM NEP1_RX [2]

CN2301 NM
NEP1_TX [0] 1
NEP1_RX [0] 2
GND 3

CN2302 NM
NEP1_TX [1] 1
NEP1_RX [1] 2
GND 3

CN2303 NM
NEP1_TX [2] 1
NEP1_RX [2] 2
GND 3

MAIN
APPL
CALC

IC2305 MAX3221PWR NM
C2313 0.1uF NM
C2315 NM 0.1uF
C2316 NM 0.1uF
C2309 NM 0.1uF
C2311 0.1uF NM
NEP1_UART_TX [0] NEP1_TX [0]
NEP1_UART_TX [1] NEP1_TX [1]
NEP1_RX [0] NEP1_UART_RX [0]
NEP1_RX [1] NEP1_UART_RX [1]

IC2306 MAX3222IPWR NM
C2314 0.1uF NM
C2317 NM 0.1uF
C2318 NM 0.1uF
C2310 NM 0.1uF
C2312 0.1uF NM
NEP1_UART_TX [2] NEP1_TX [2]
NEP1_RX [2] NEP1_UART_RX [2]

NEPTUNE1 GMII & MISC

CA-82A (23/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_23

CA-82A (24/42)
SUFFIX: -14

NM

External GbE PHY0

IC2401 88E1111-B2-BAB1 NM

NEPTUNE0 VCC & PHY

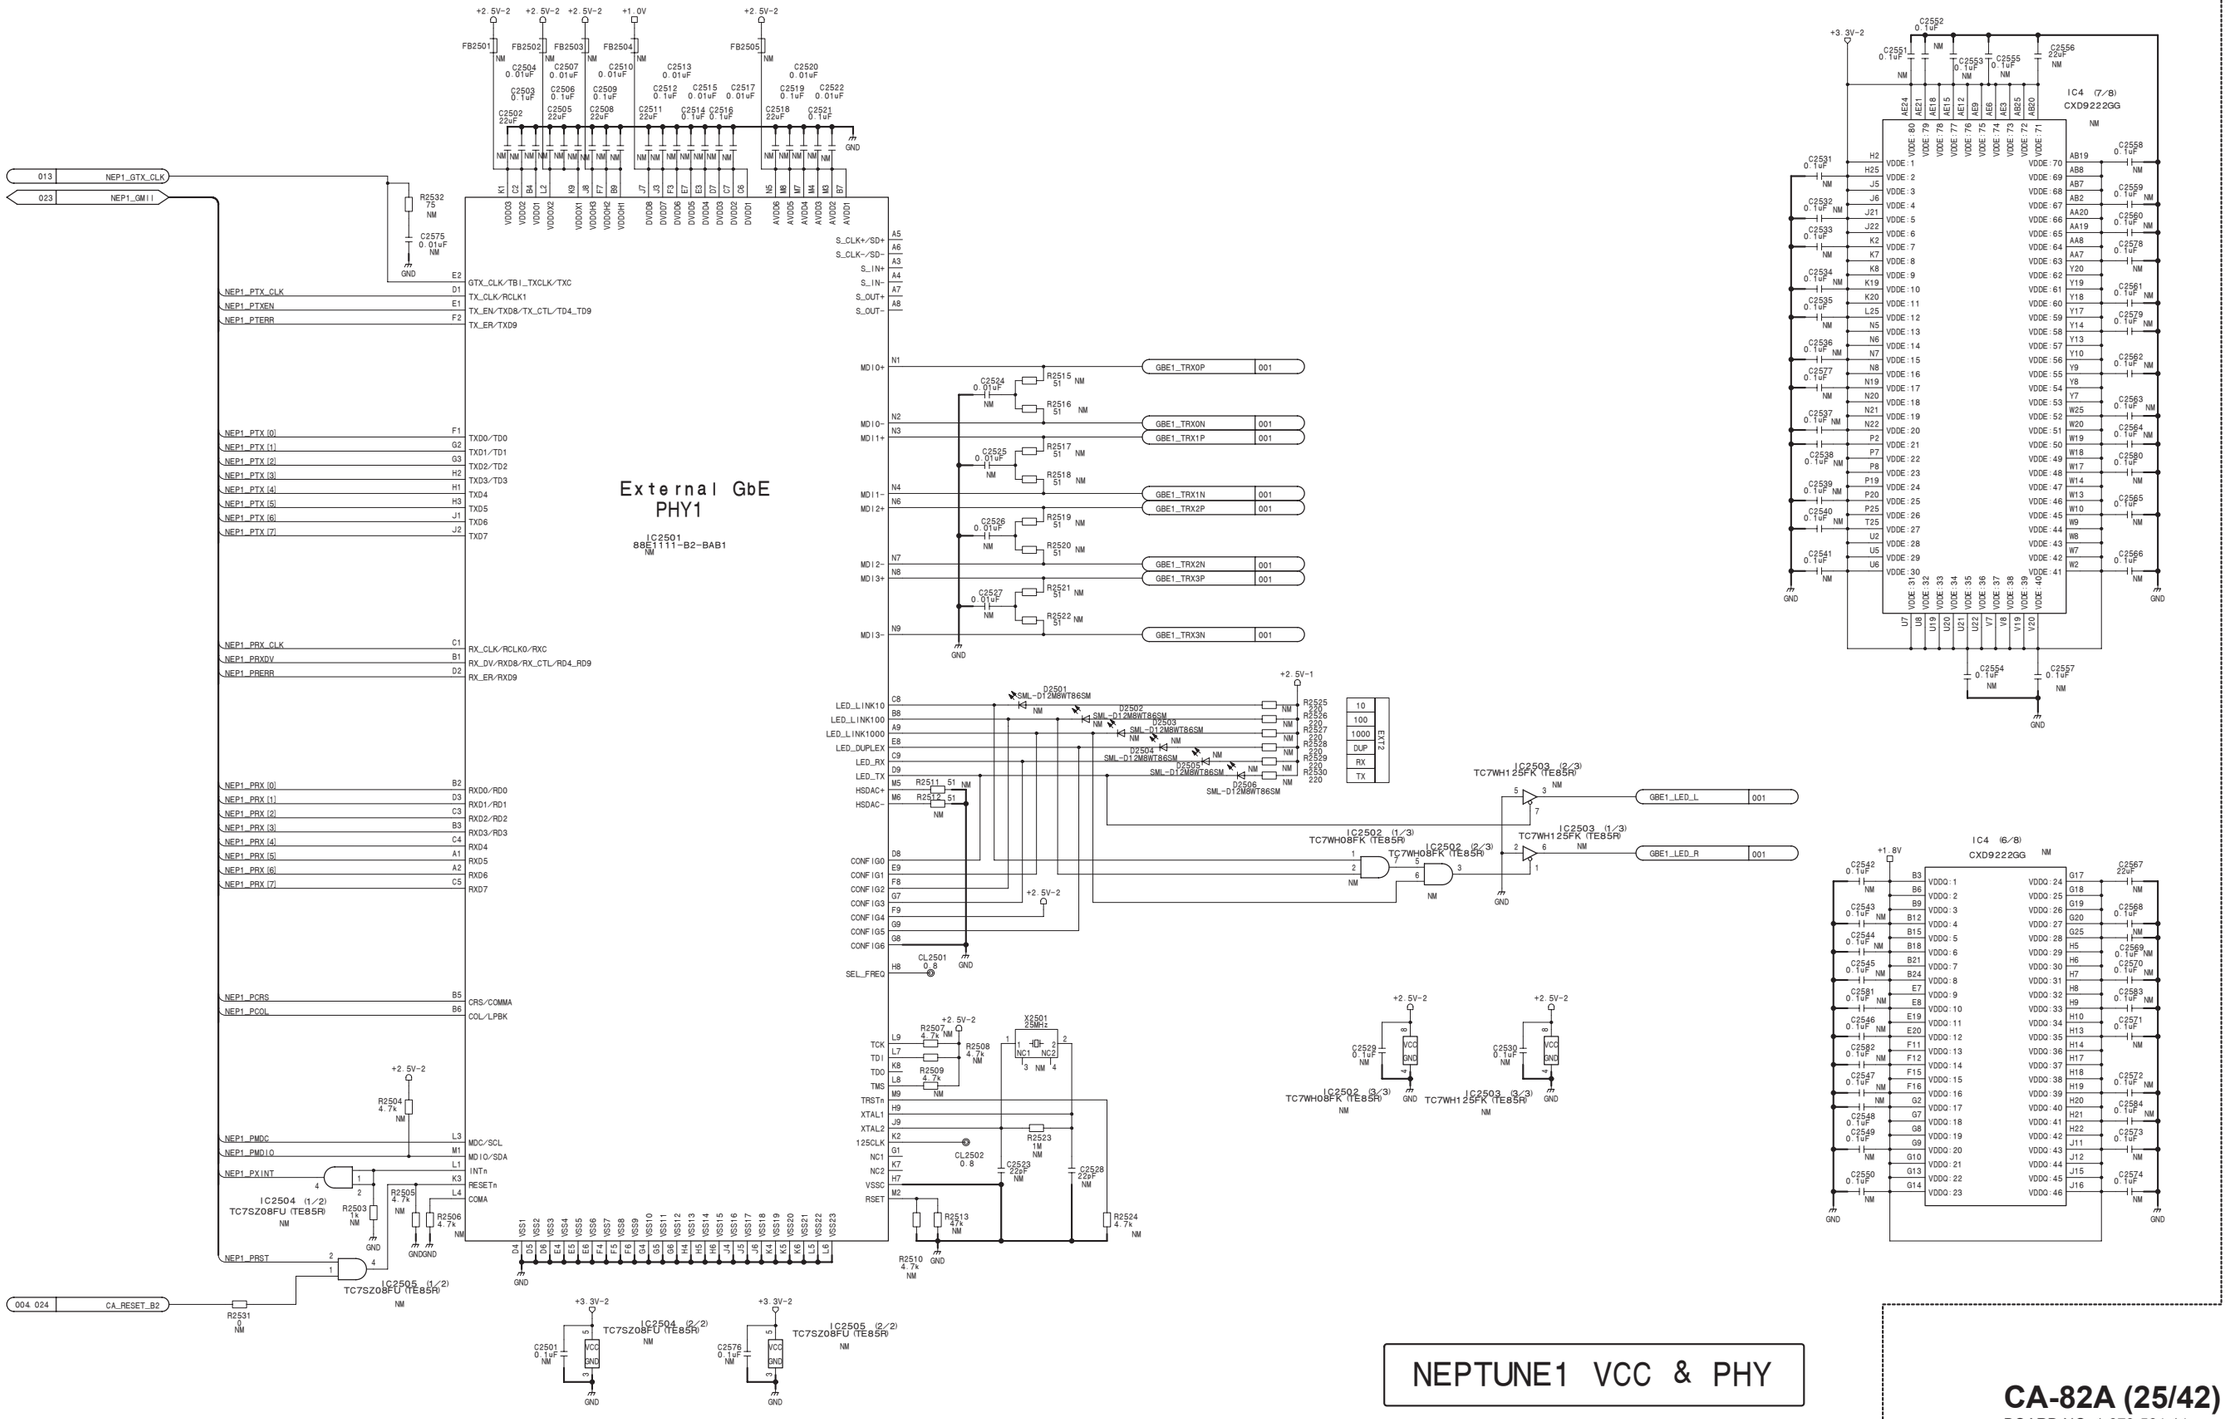

CA-82A (25/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_25

CA-82A (26/42)
SUFFIX: -14

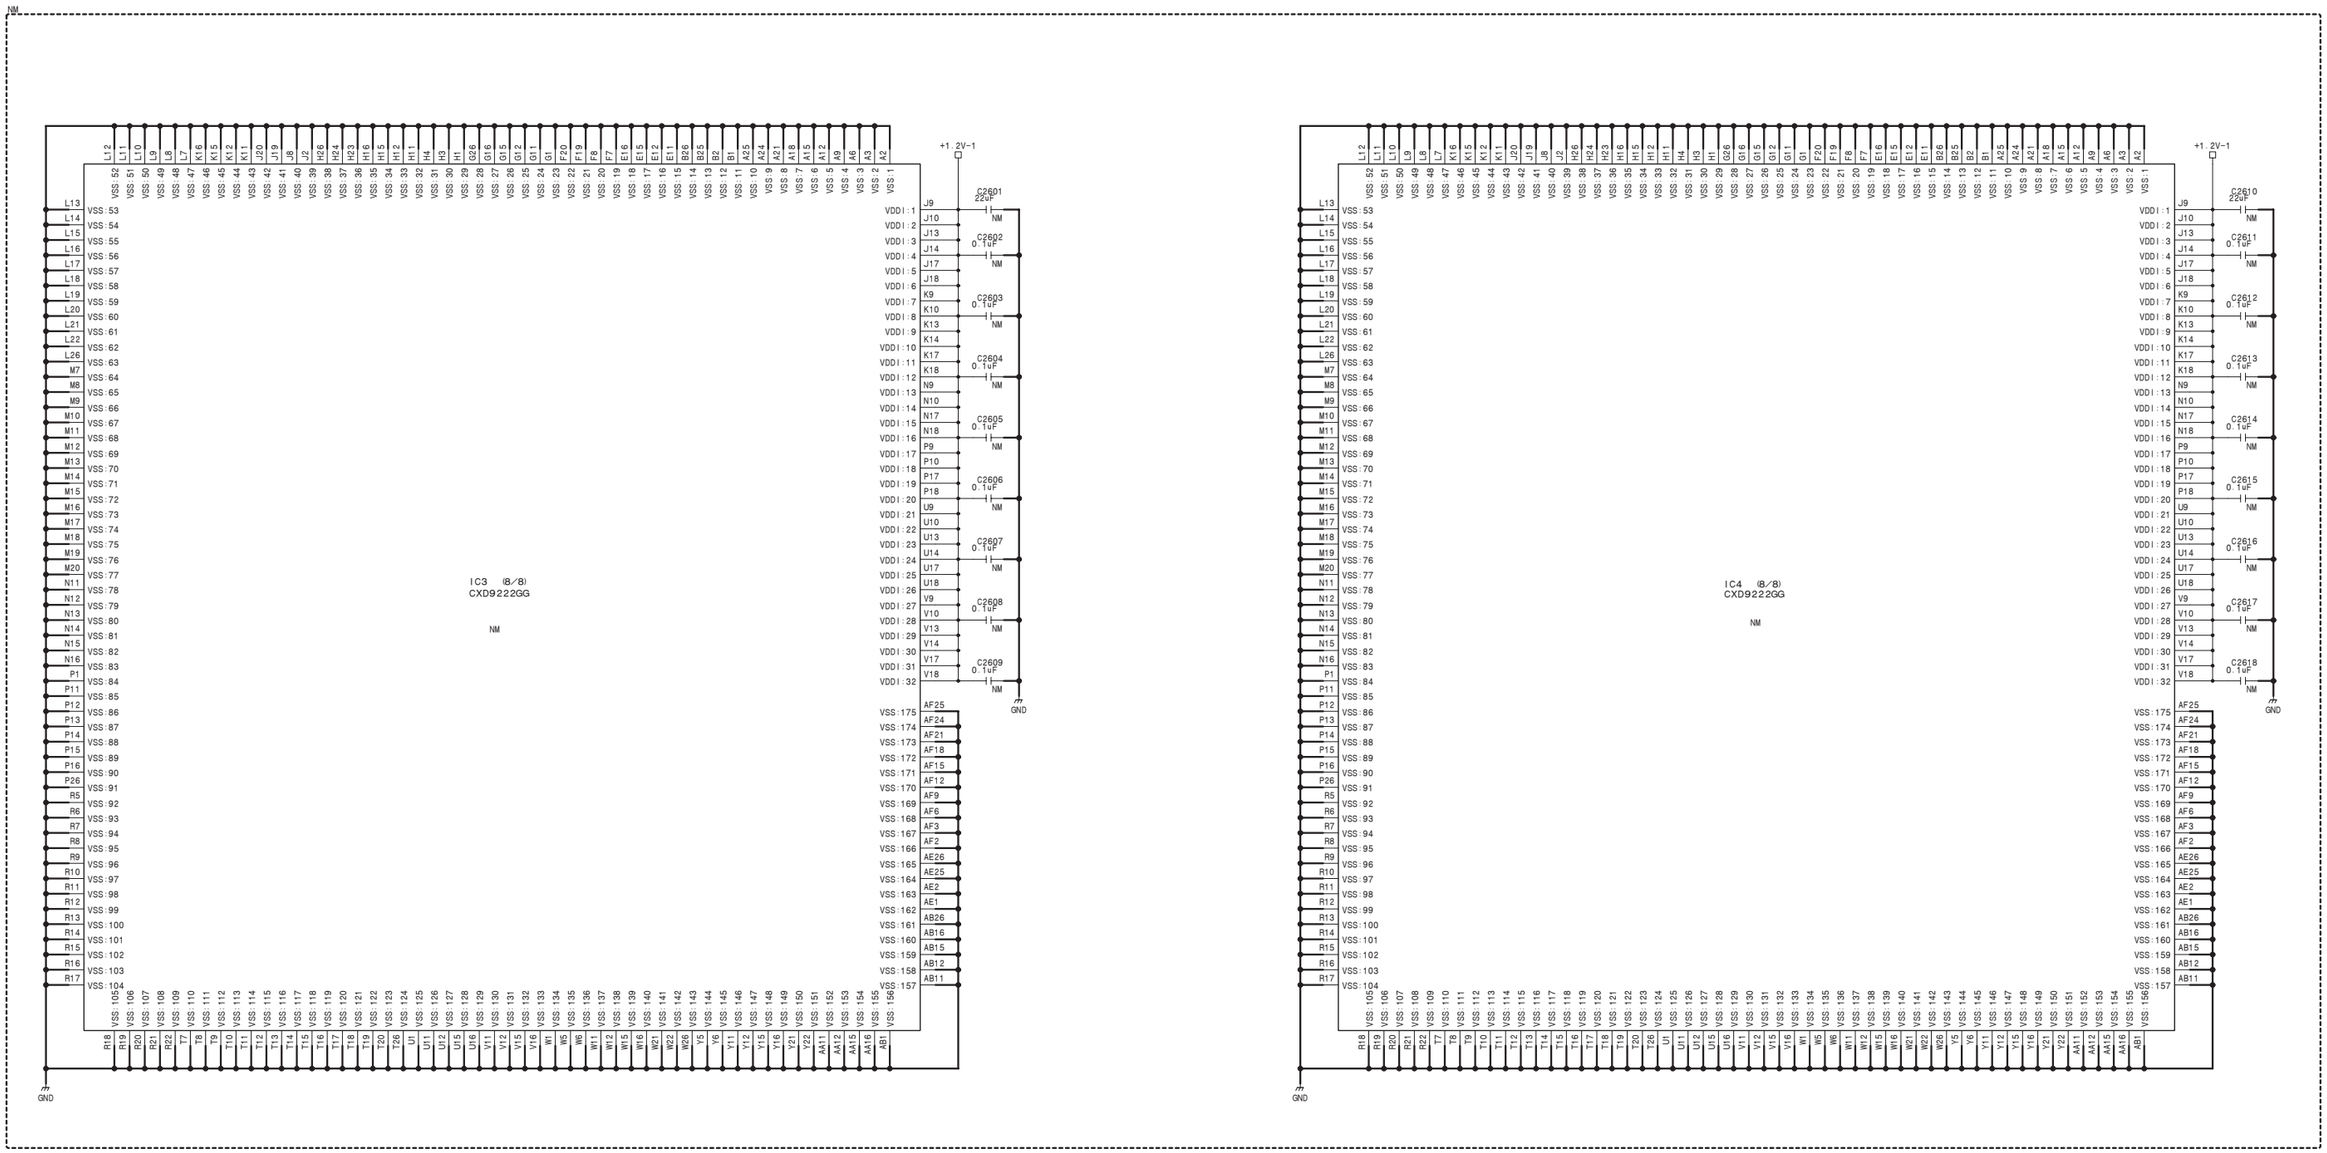

NEPTUNE0&1 VCC & GND

CA-82A (26/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_26

CA-82A (27/42) **SUFFIX: -14**

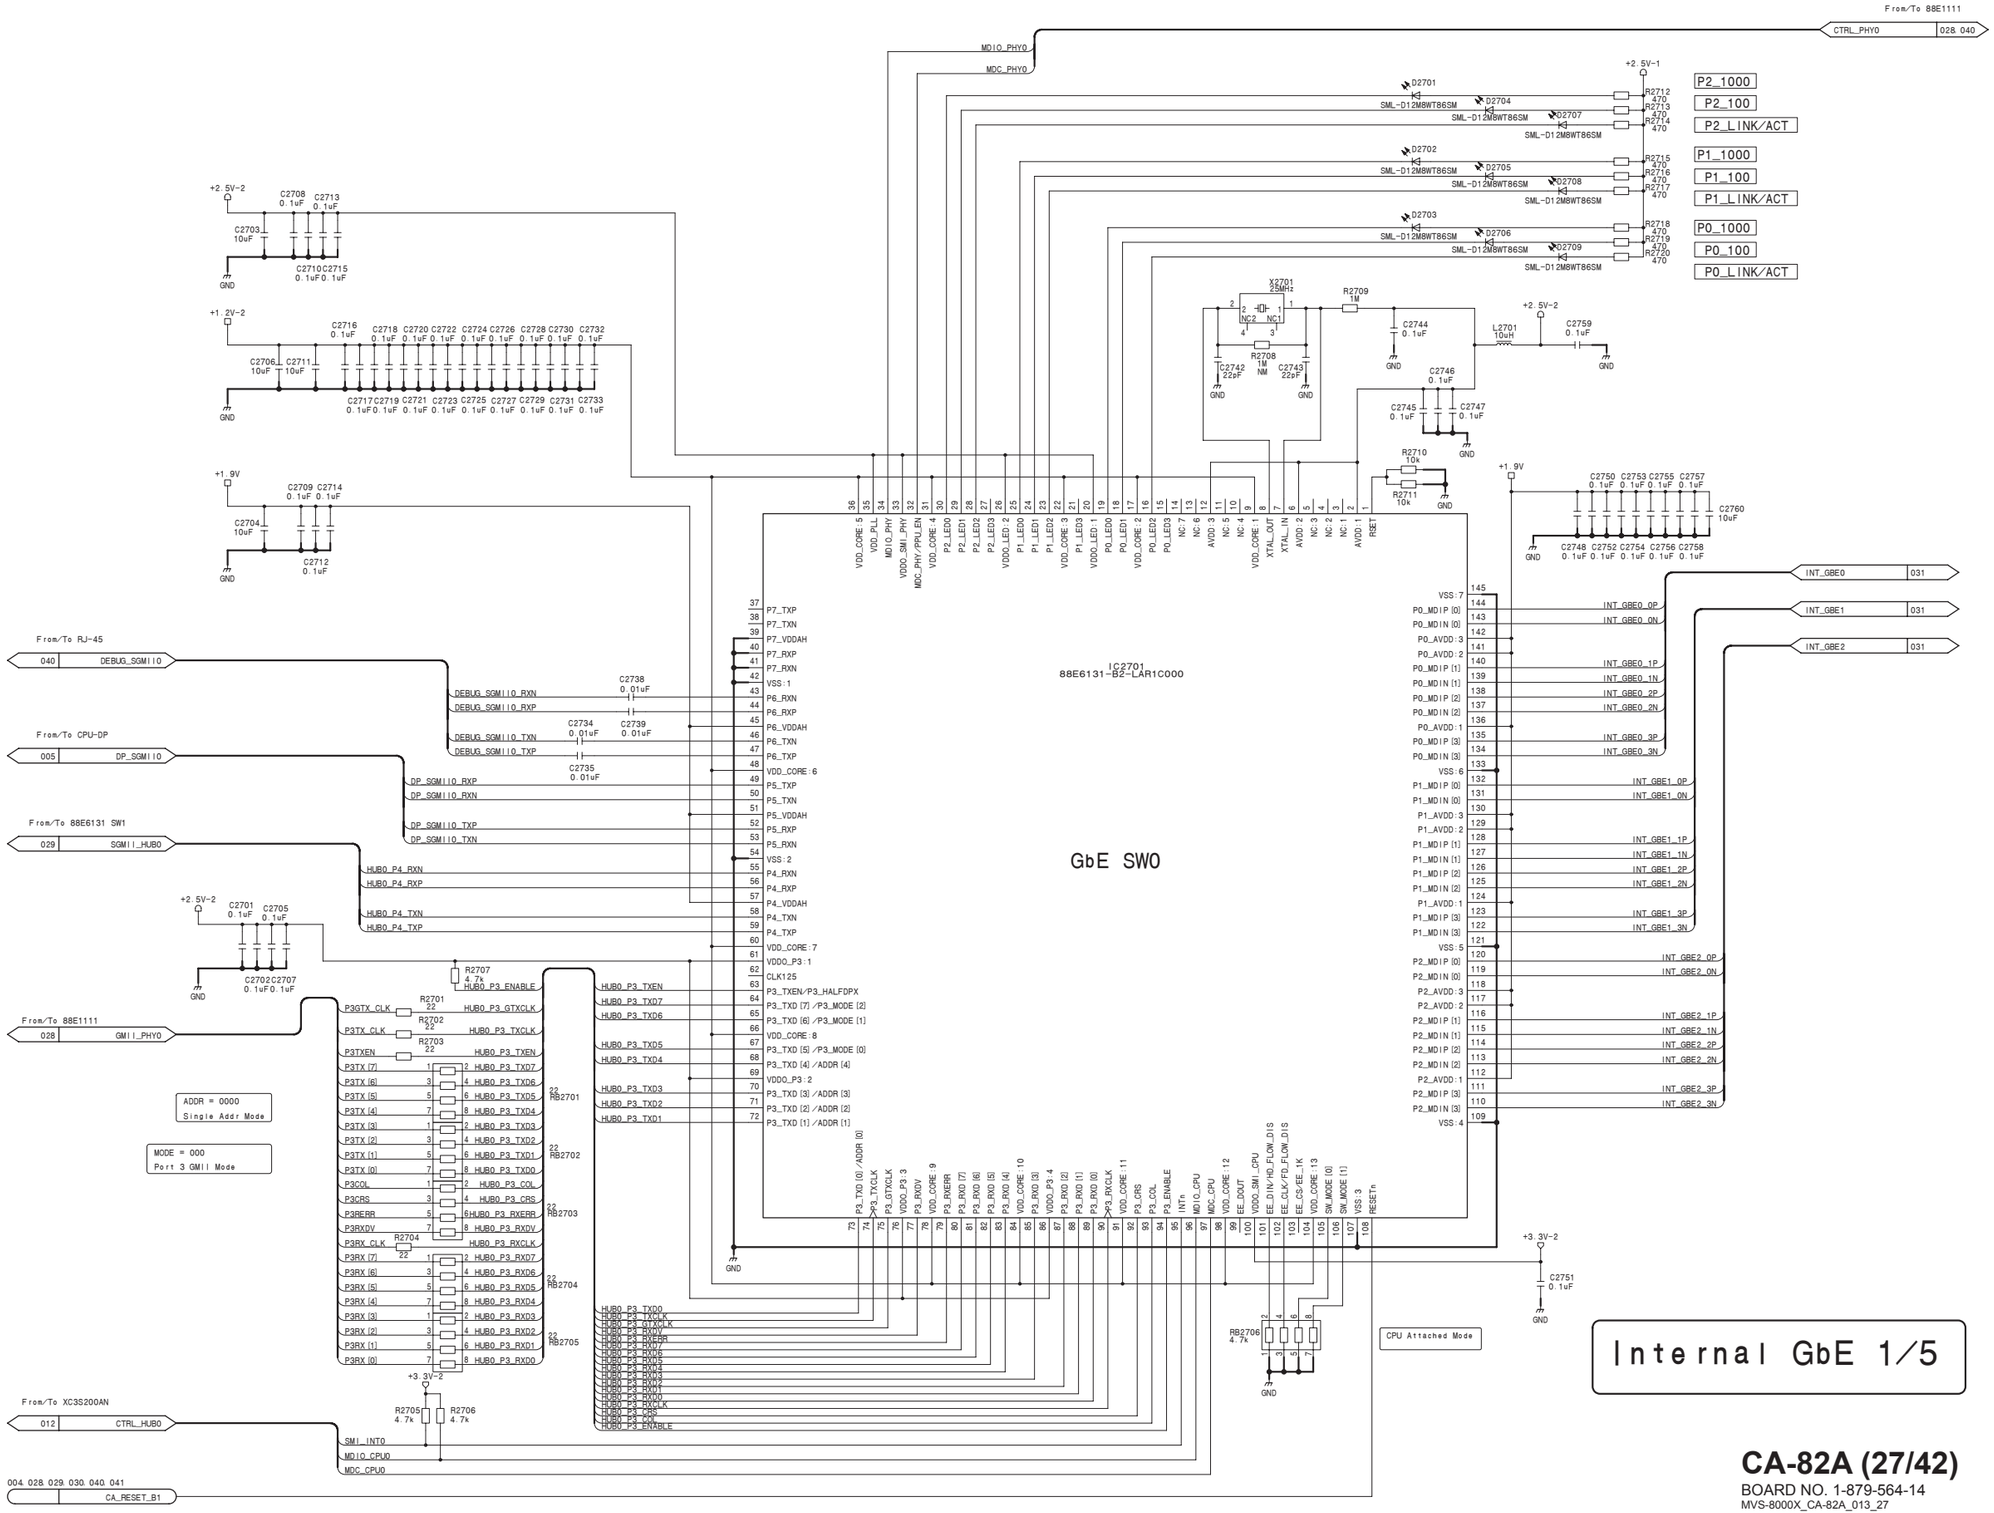

CA-82A (27/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_27

CA-82A (28/42)
SUFFIX: -14

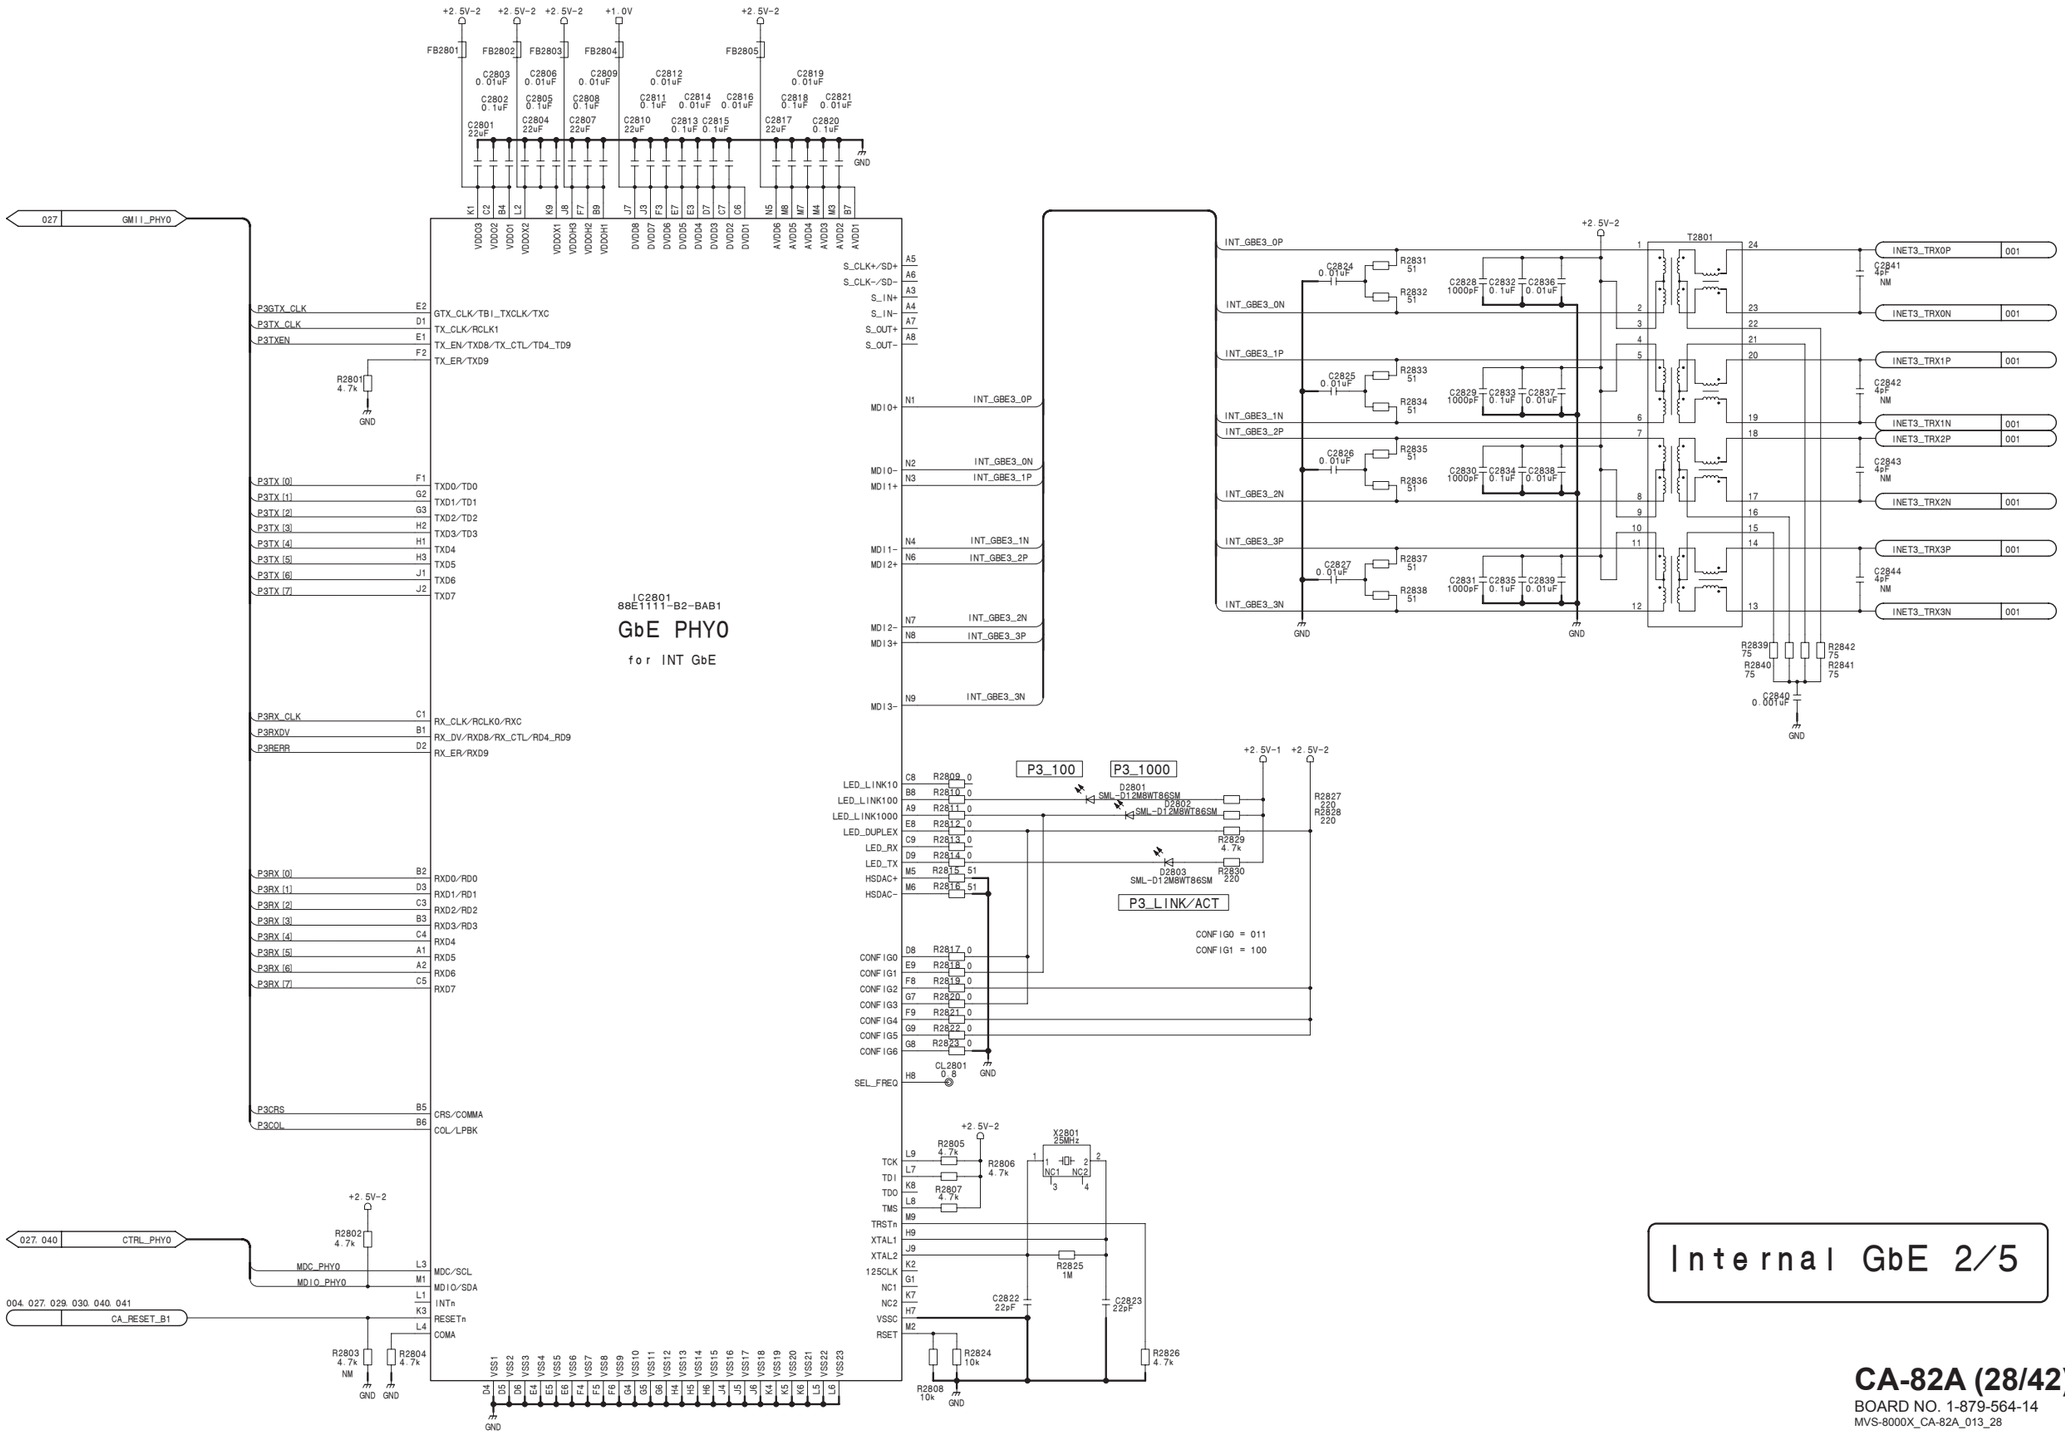

Internal GbE 2/5

CA-82A (28/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_28

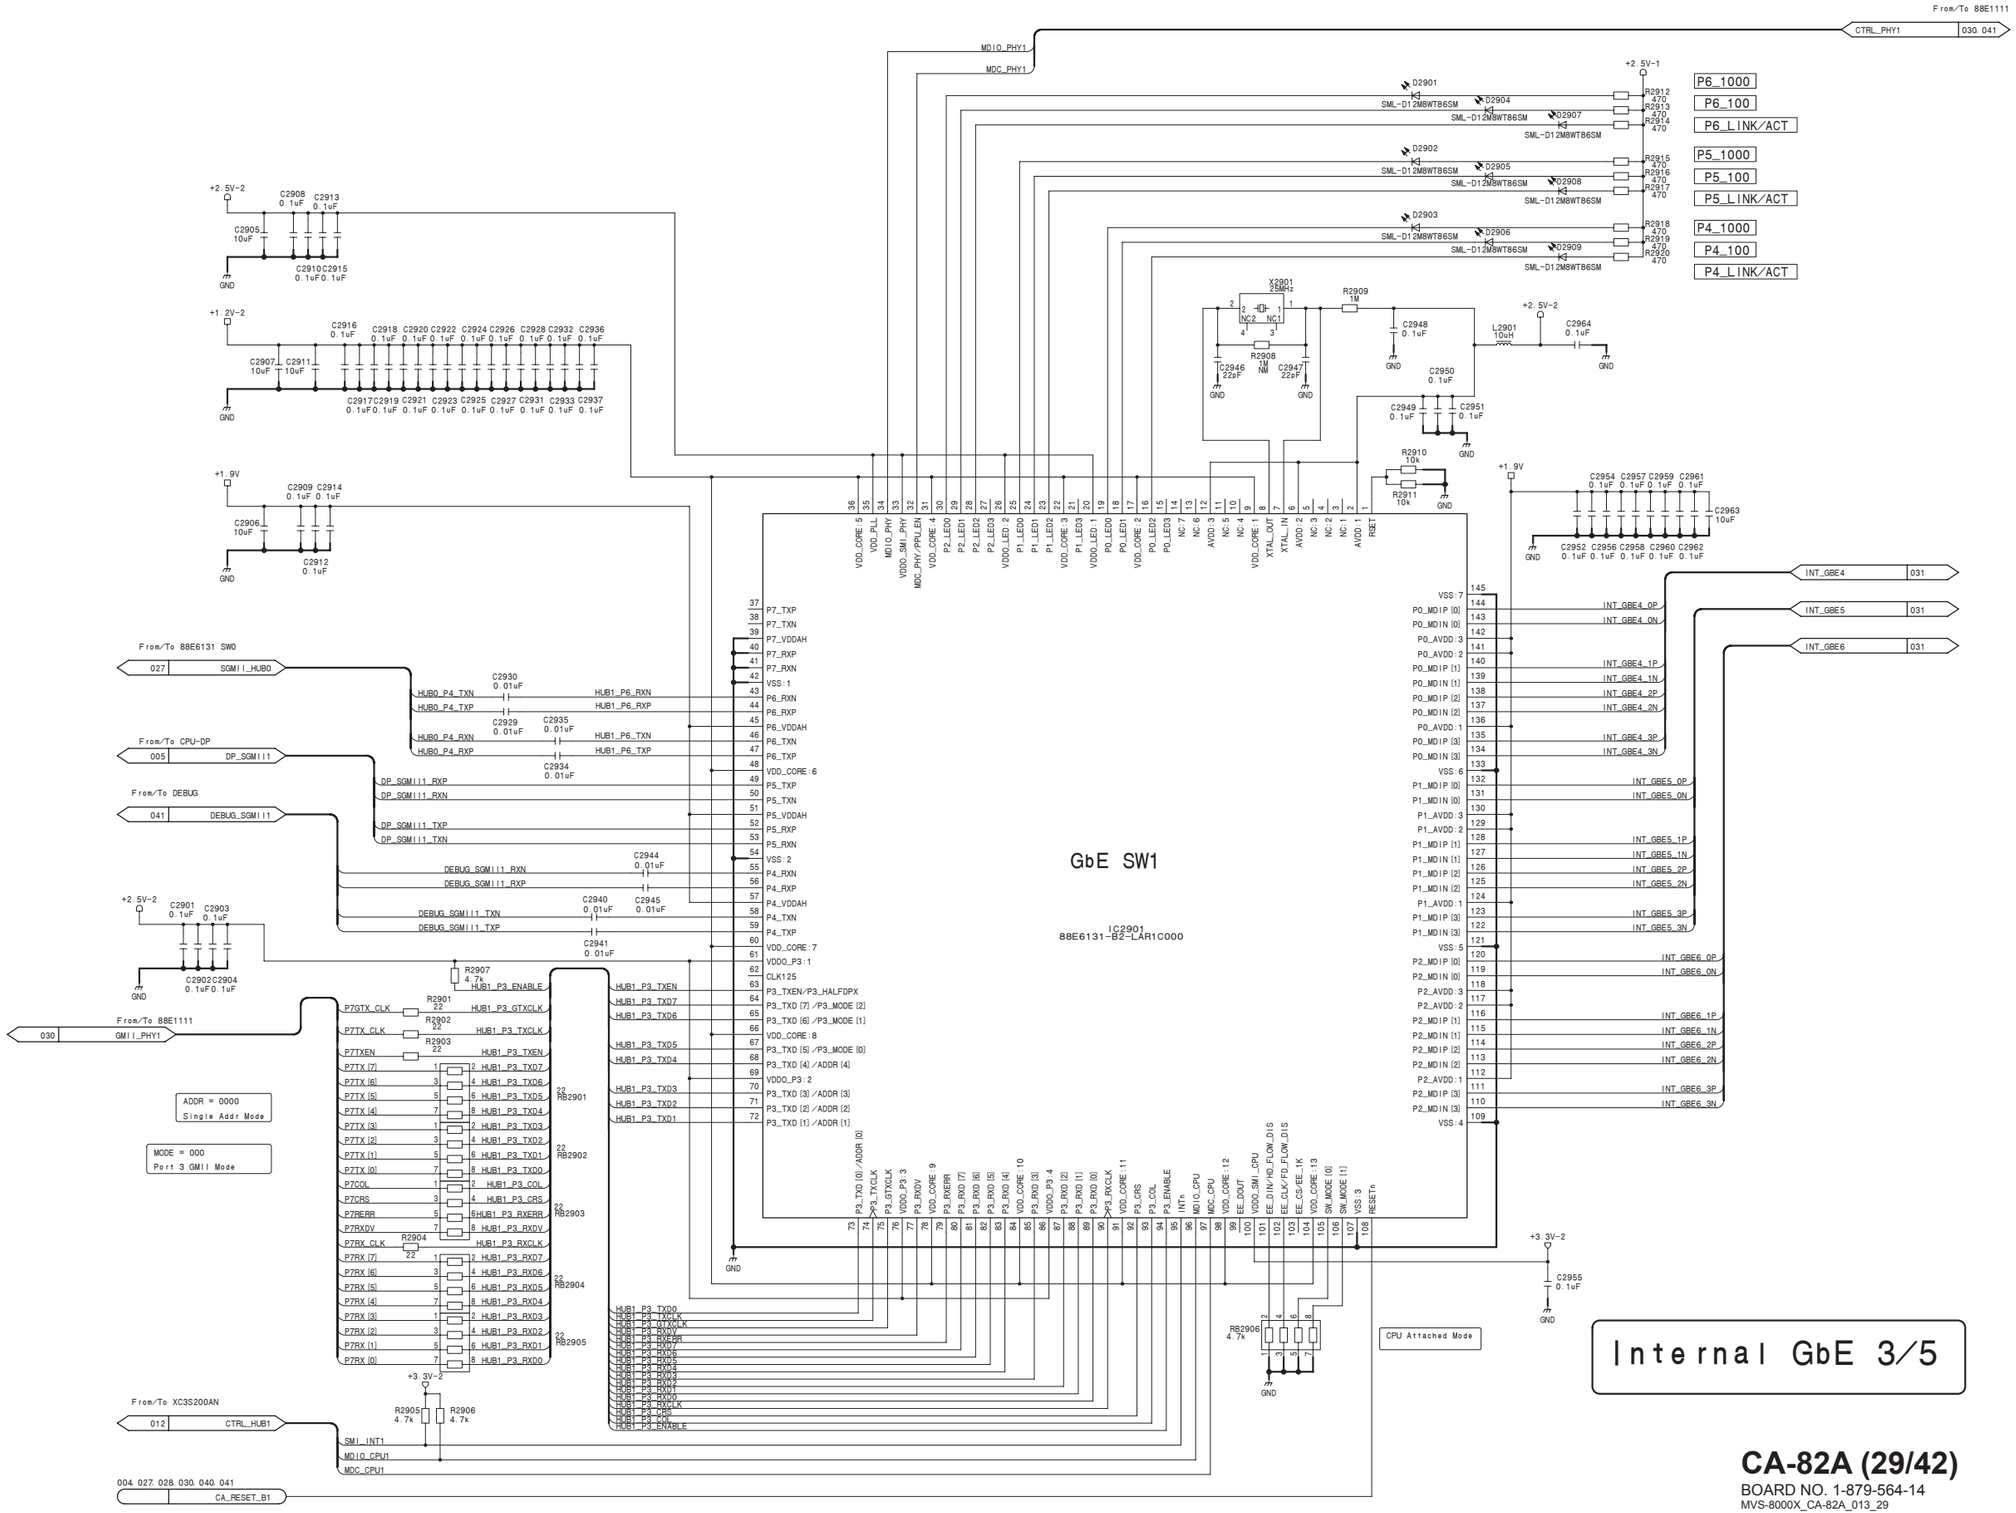

CA-82A (29/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_29

CA-82A (30/42)
SUFFIX: -14

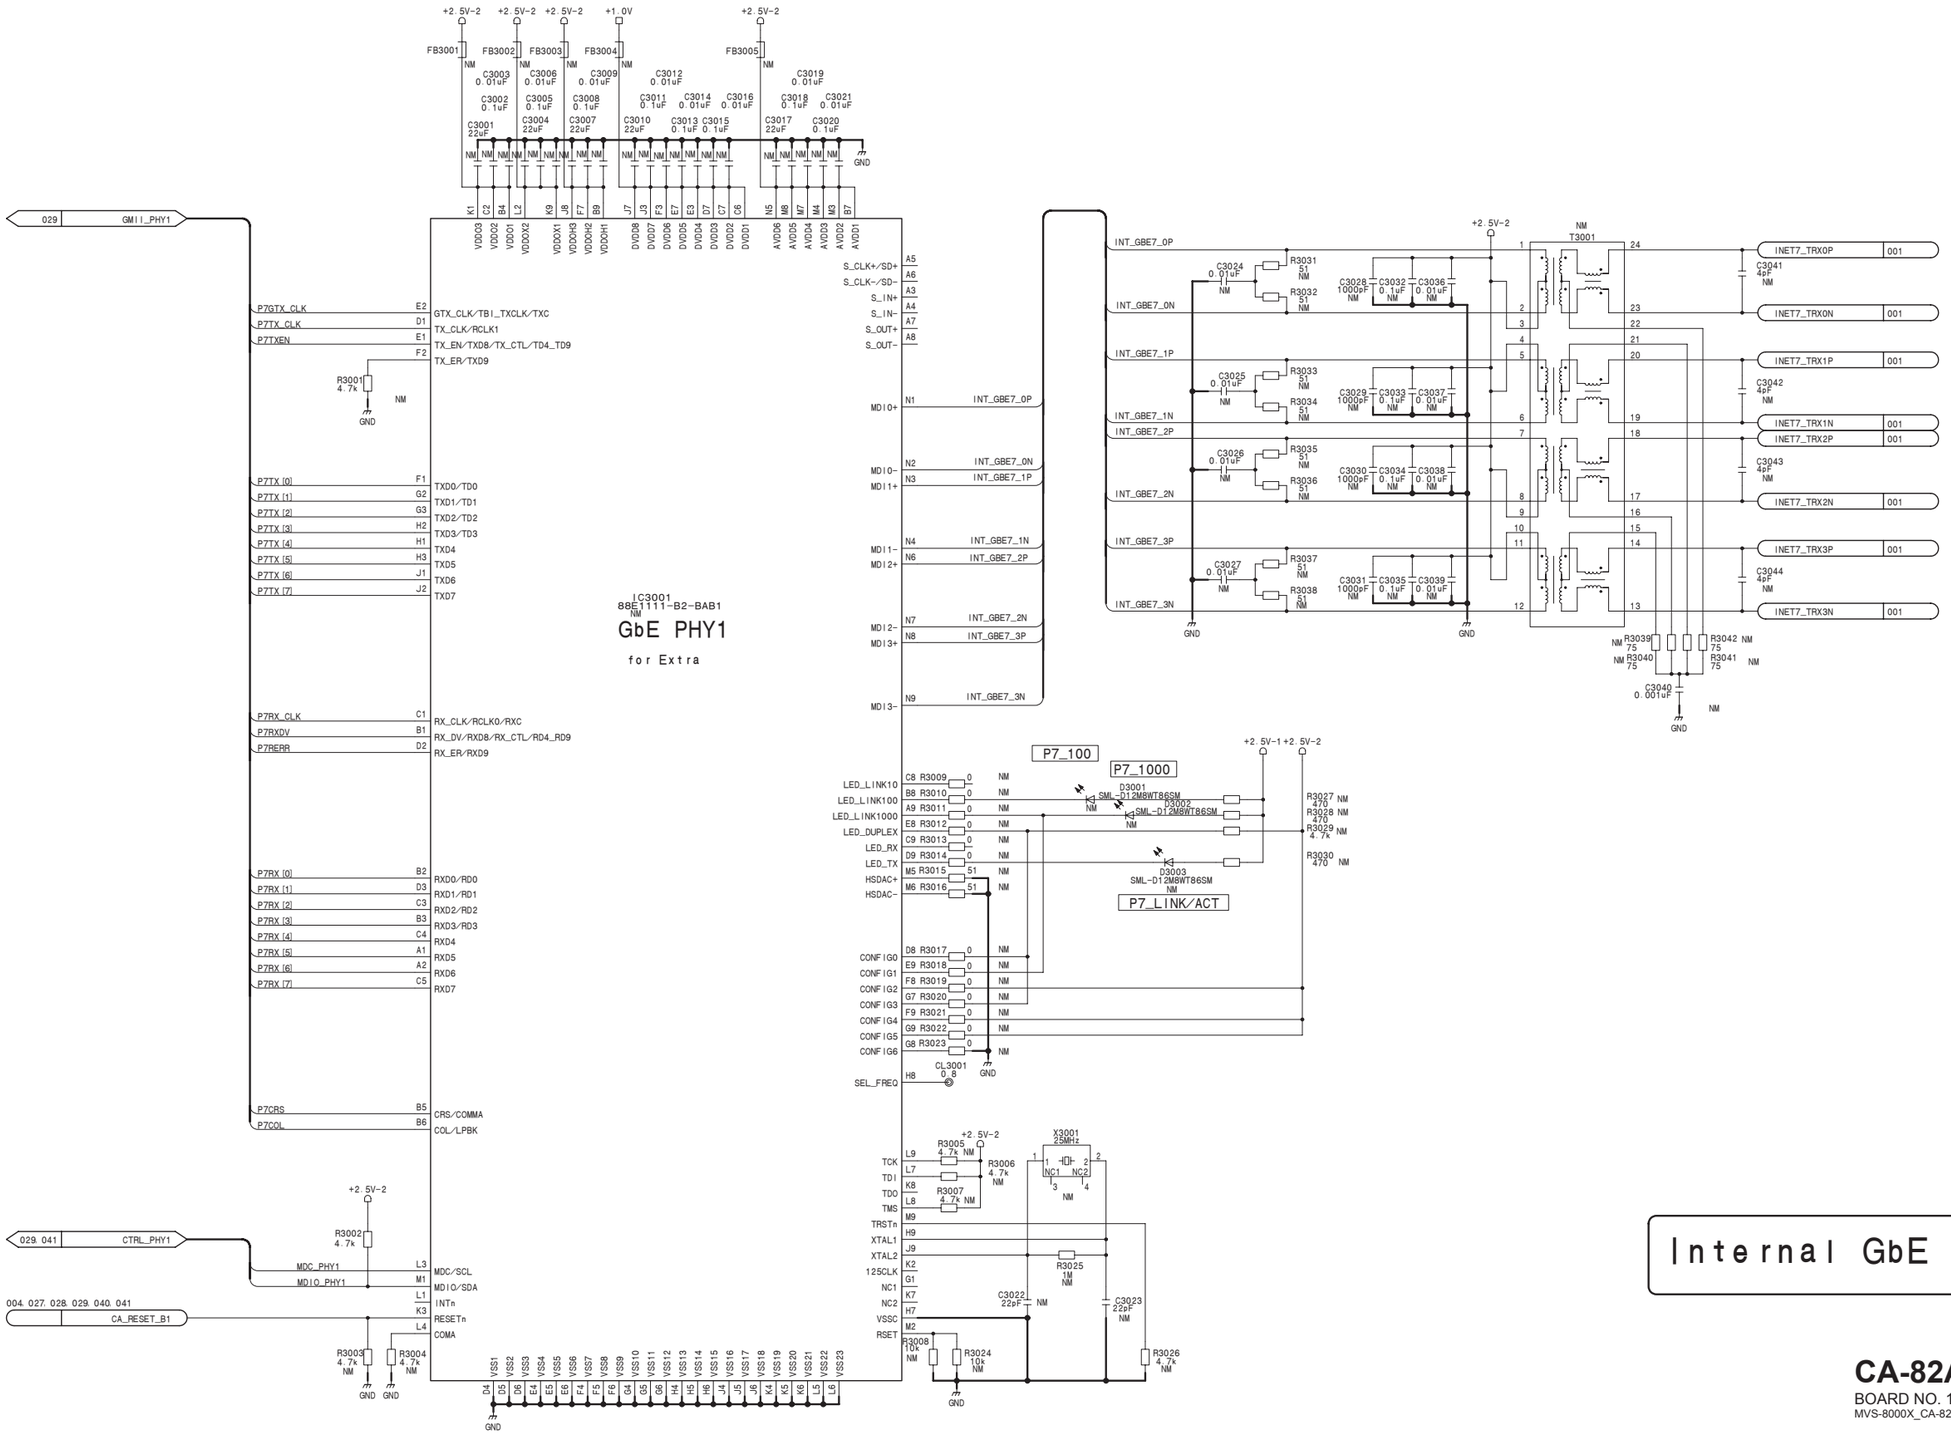

Internal GbE 4/5

CA-82A (30/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_30

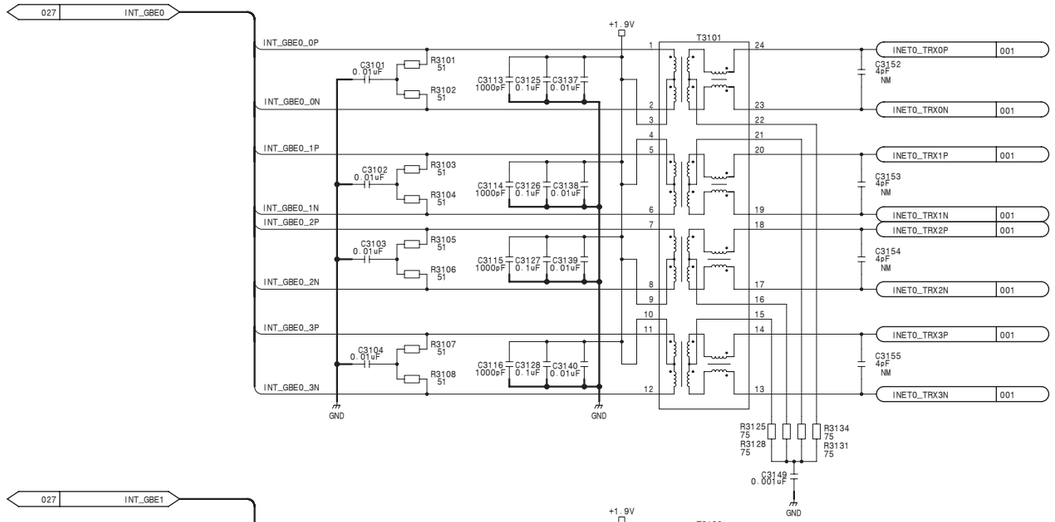

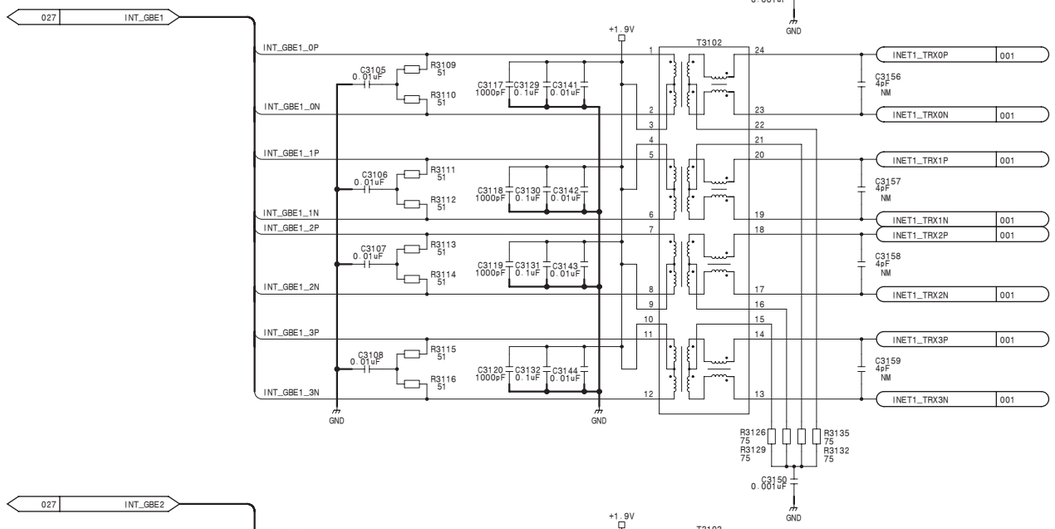

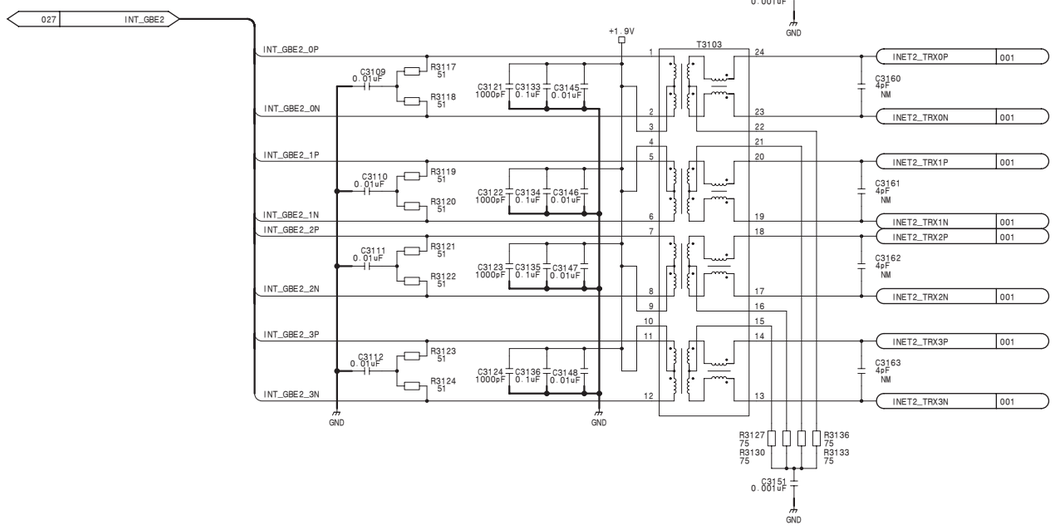

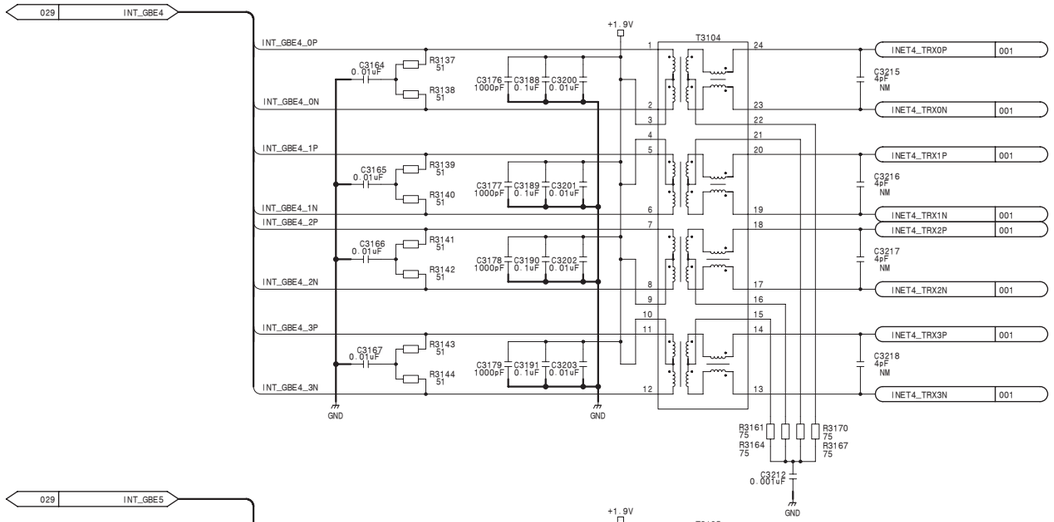

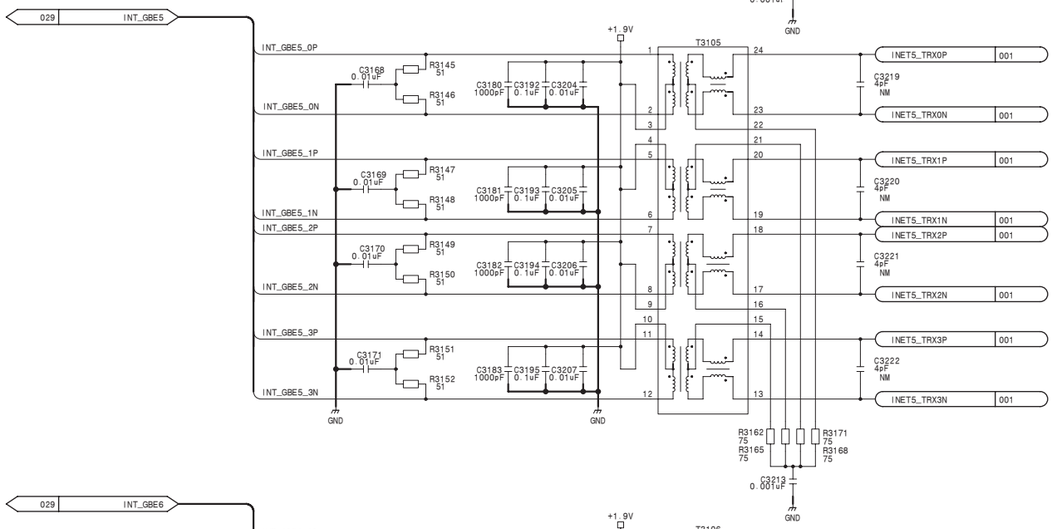

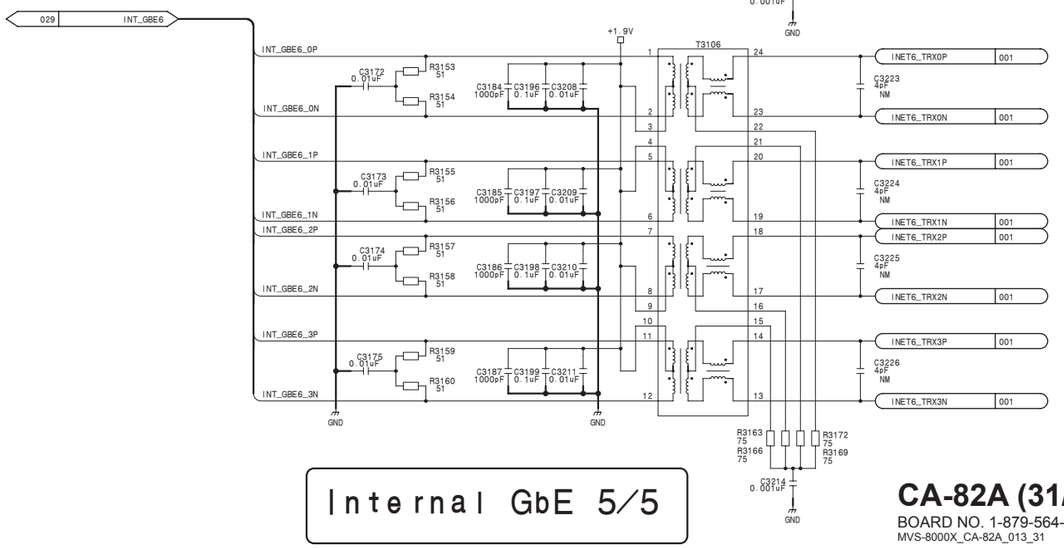

Internal GbE 5/5

CA-82A (31/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_31

CA-82A (32/42)
SUFFIX: -14

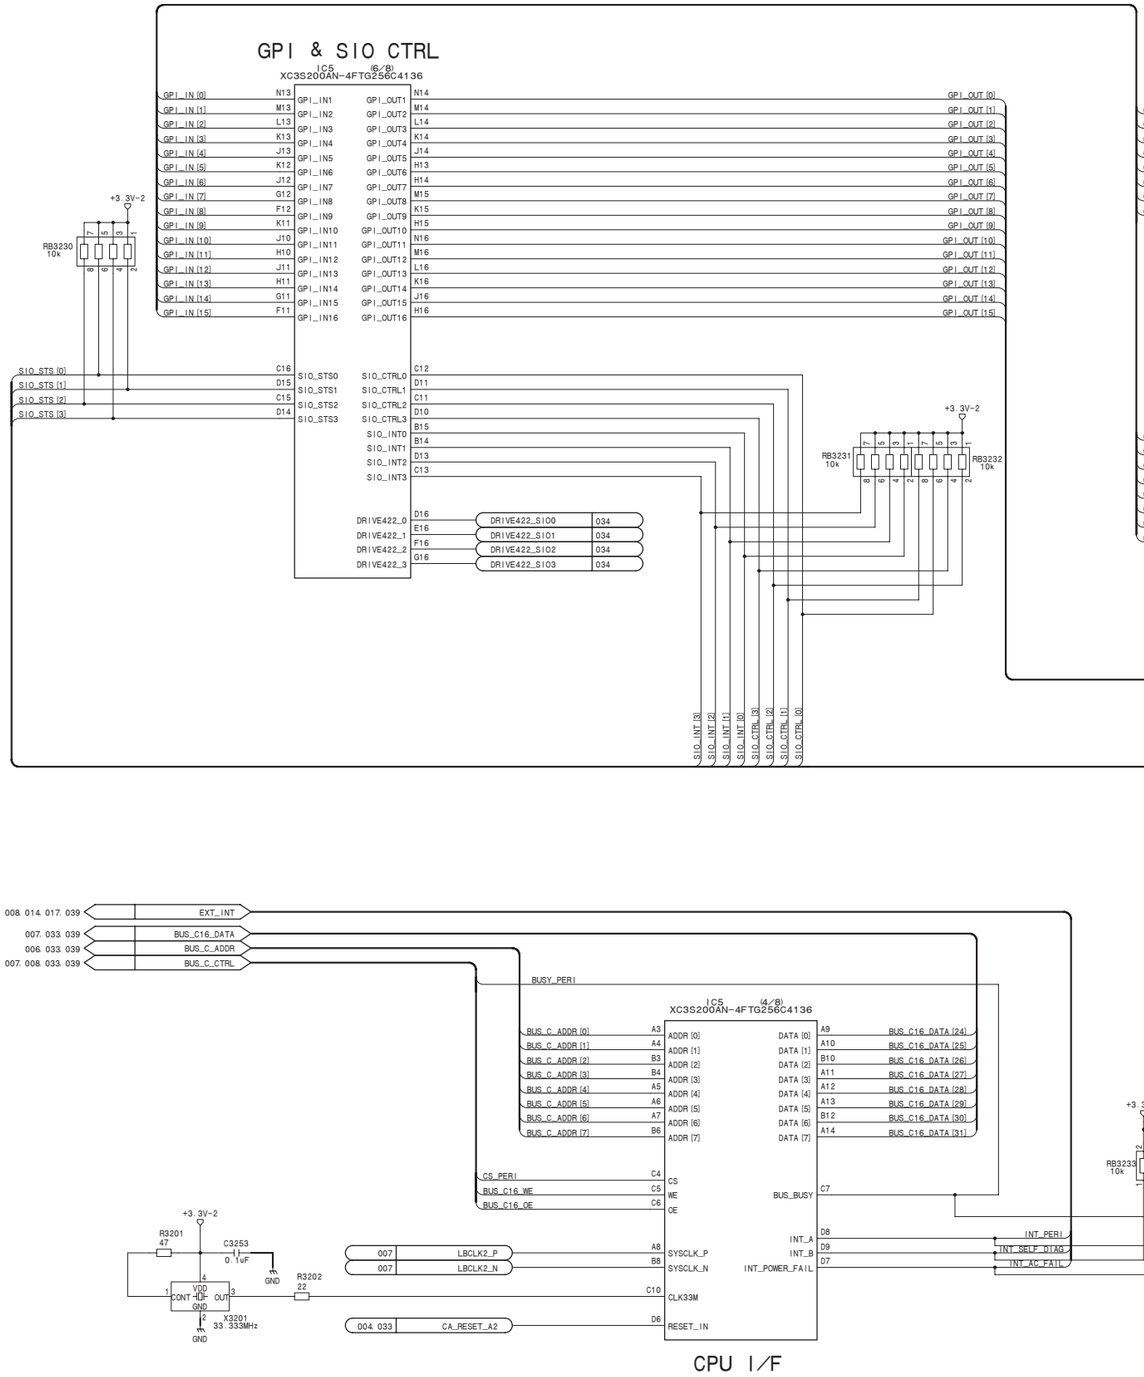

CA-82A (32/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_32

CA-82A (33/42)
SUFFIX: -14

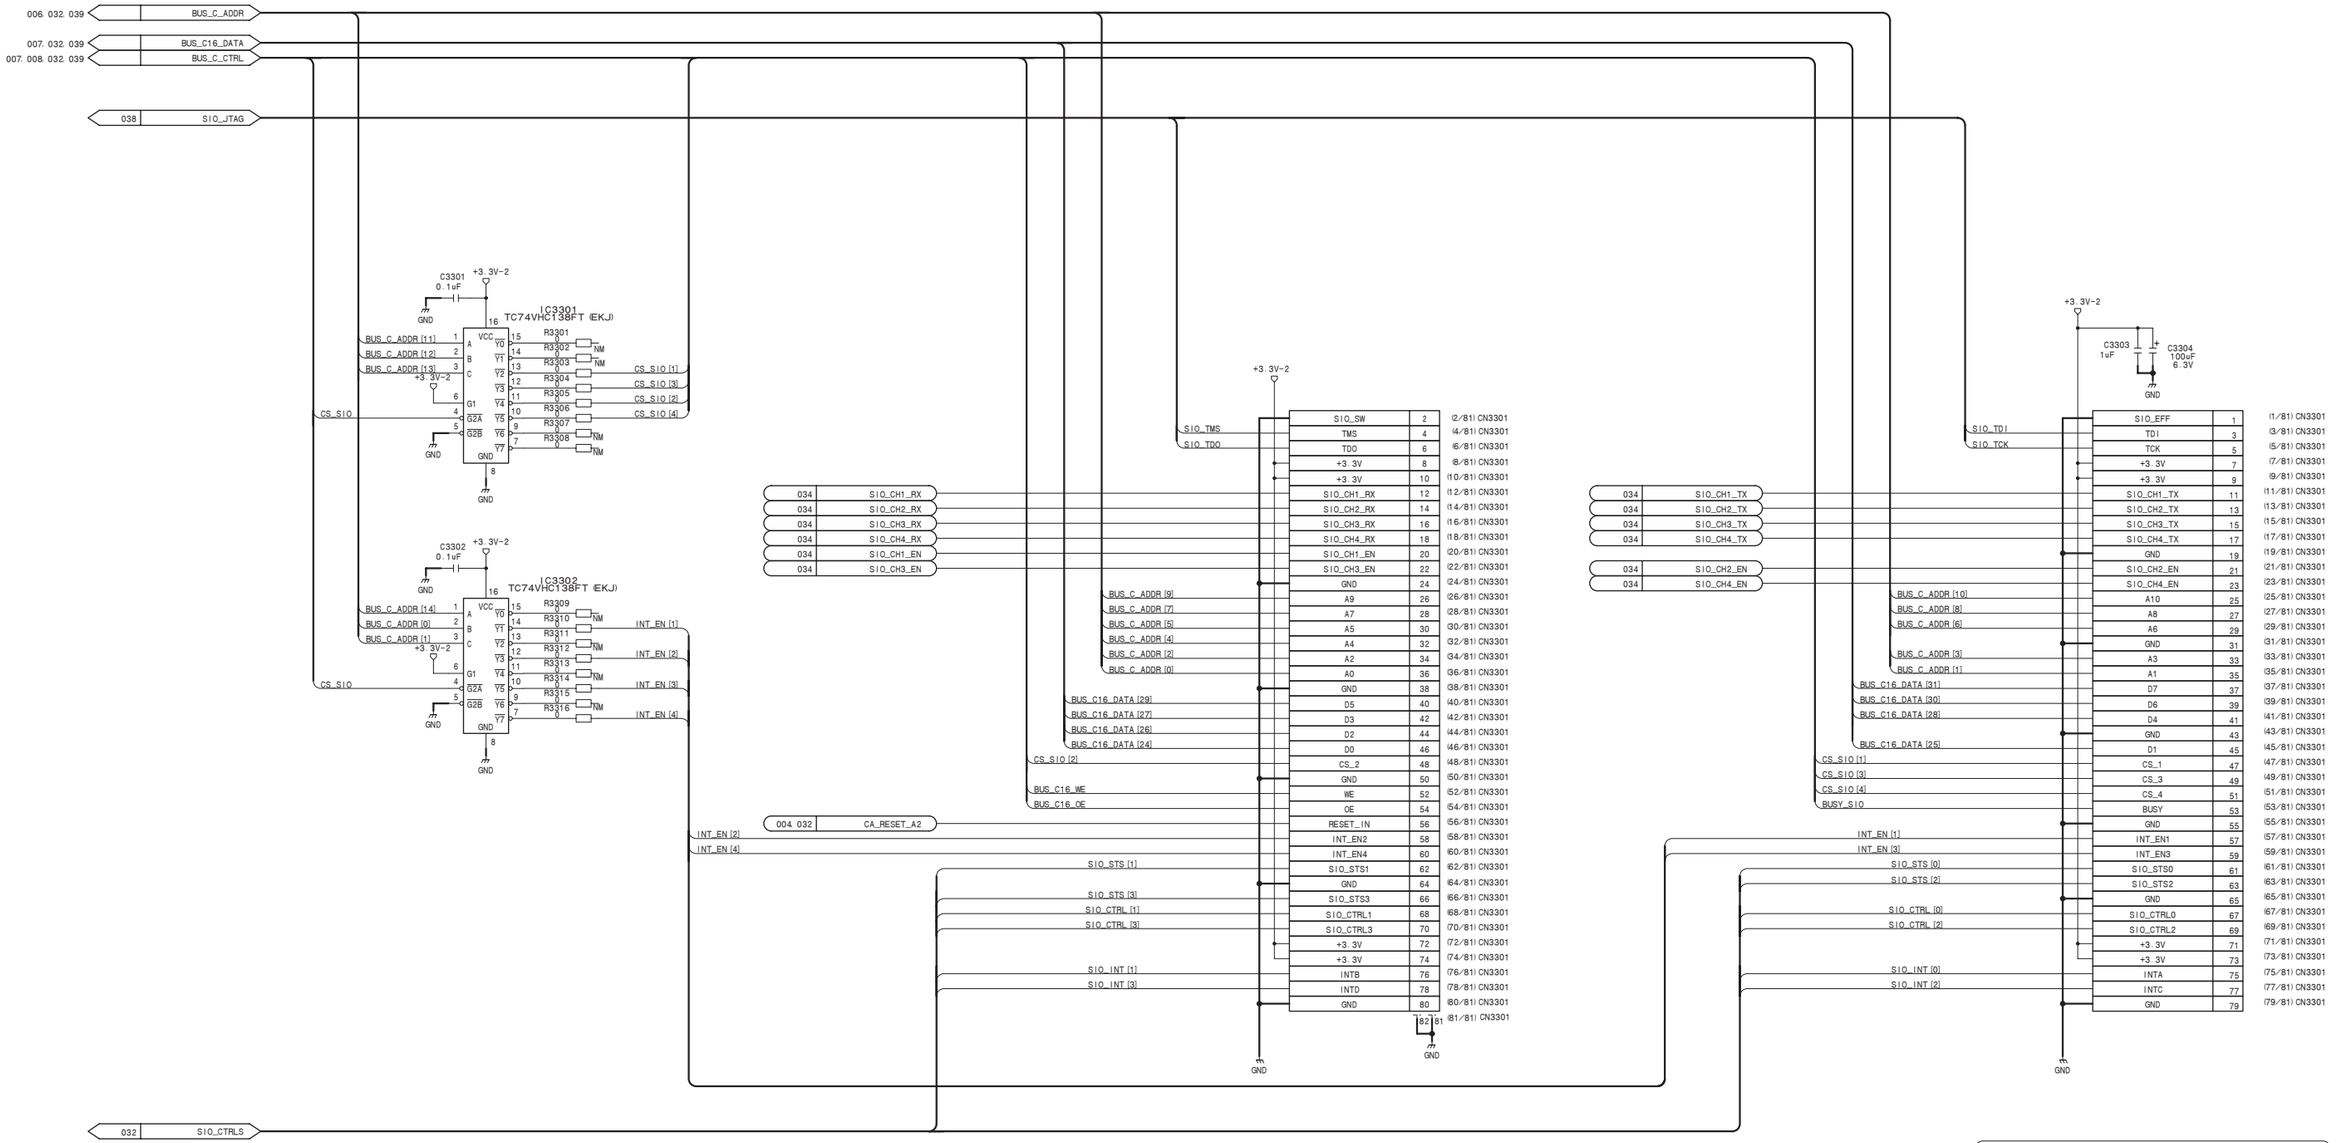

SIO-26 CONNECTOR

CA-82A (33/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_33

CA-82A (34/42)
SUFFIX: -14

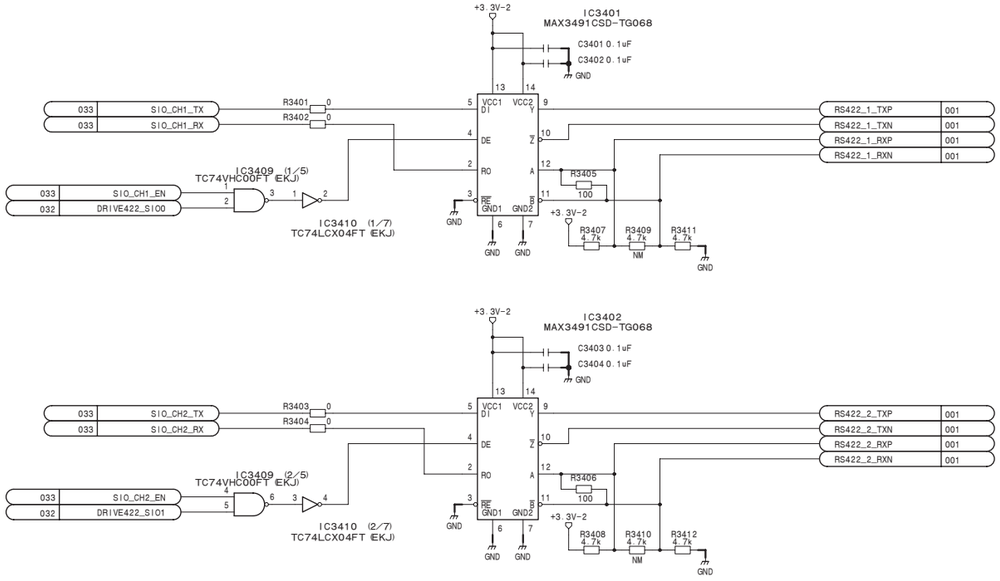

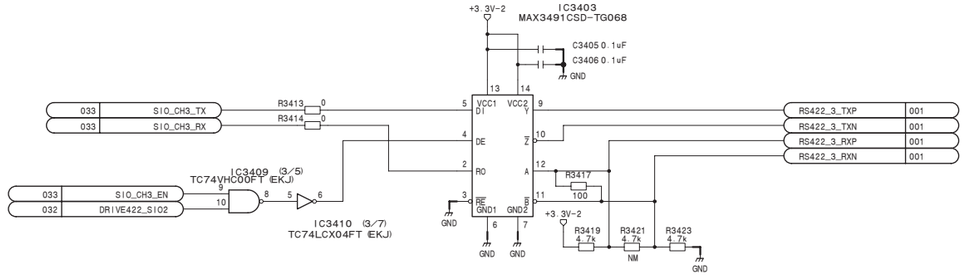

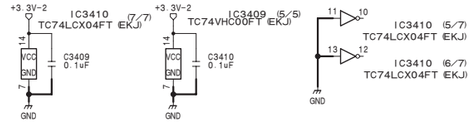

RS-422 Driver

CA-82A (34/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_34

CA-82A (35/42)
SUFFIX: -14

FAN CTRL
Board Info

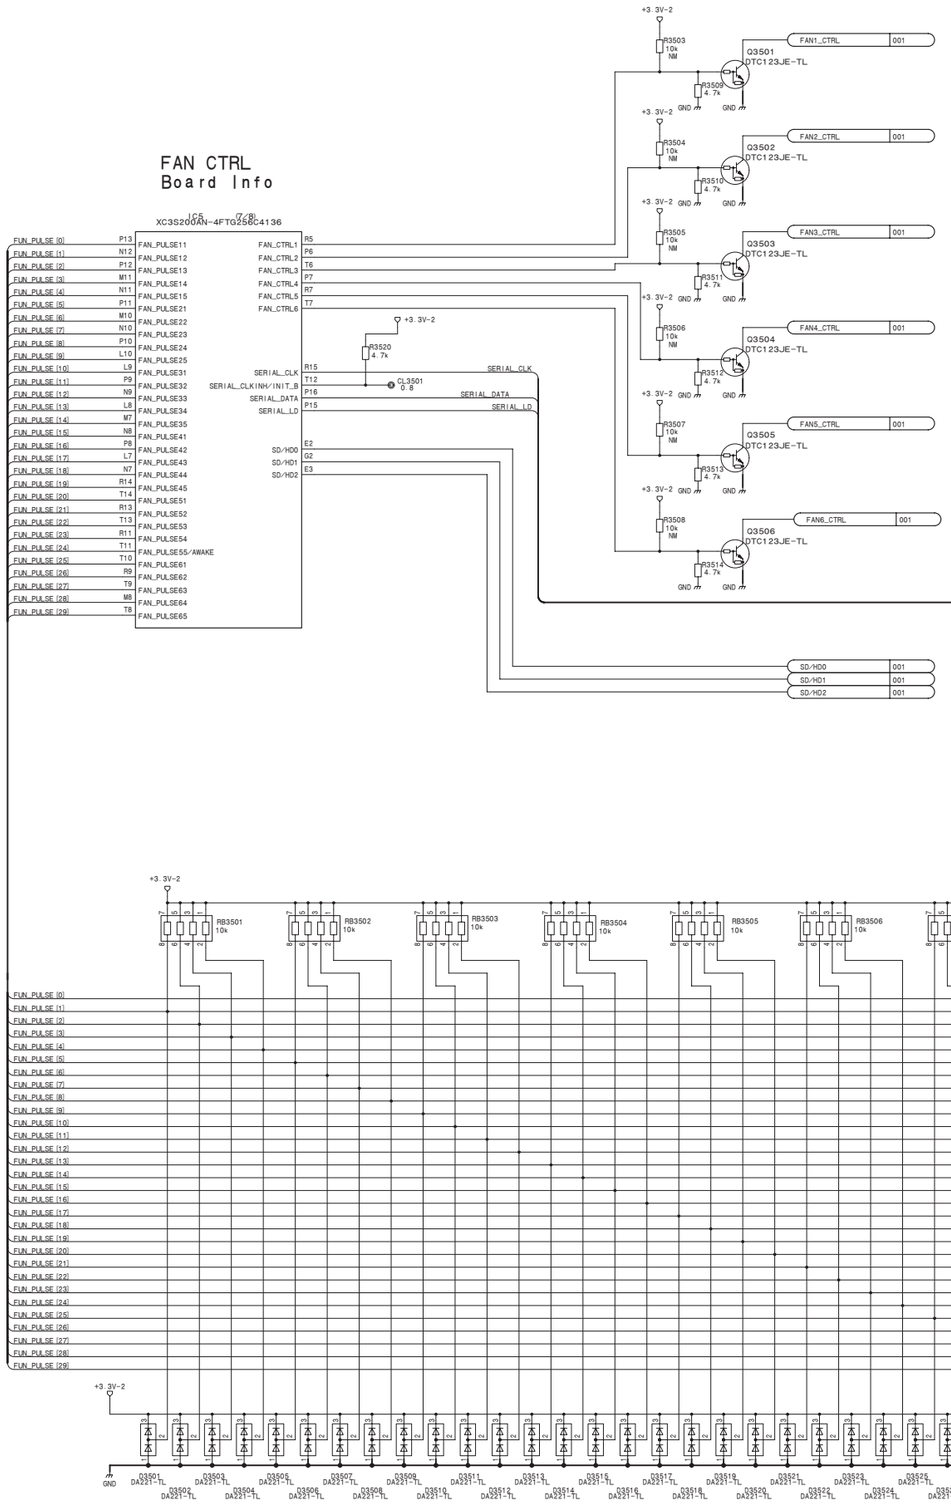

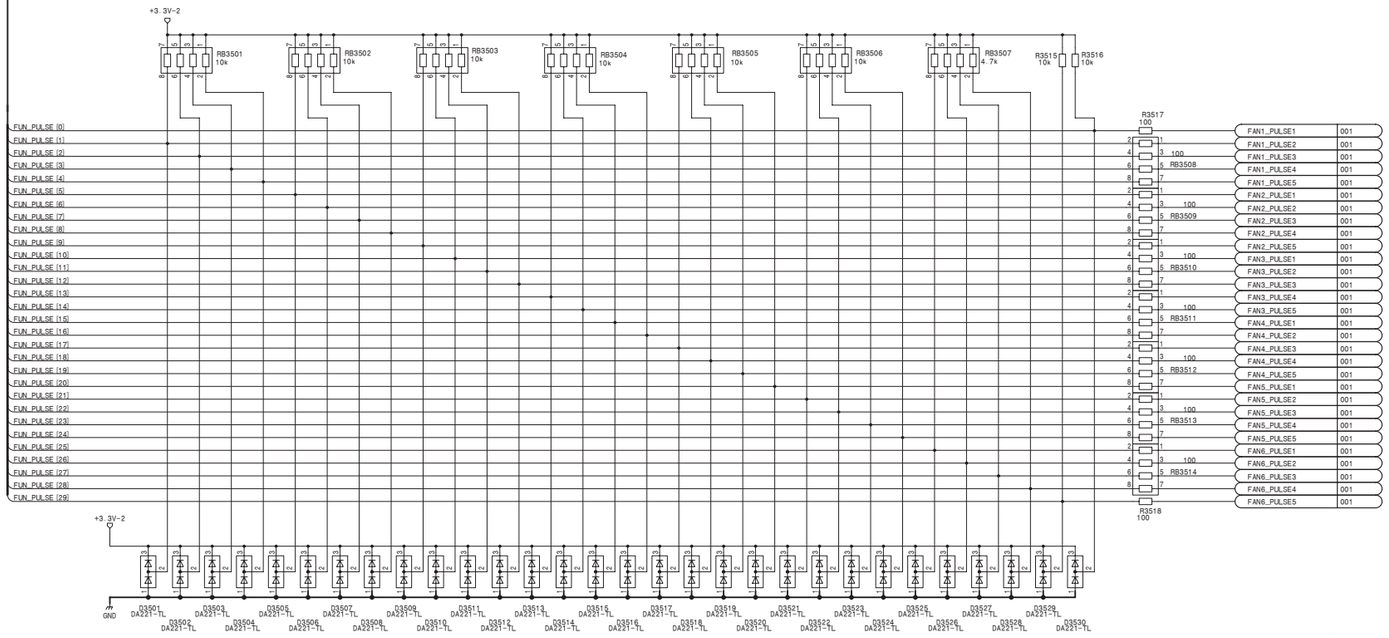

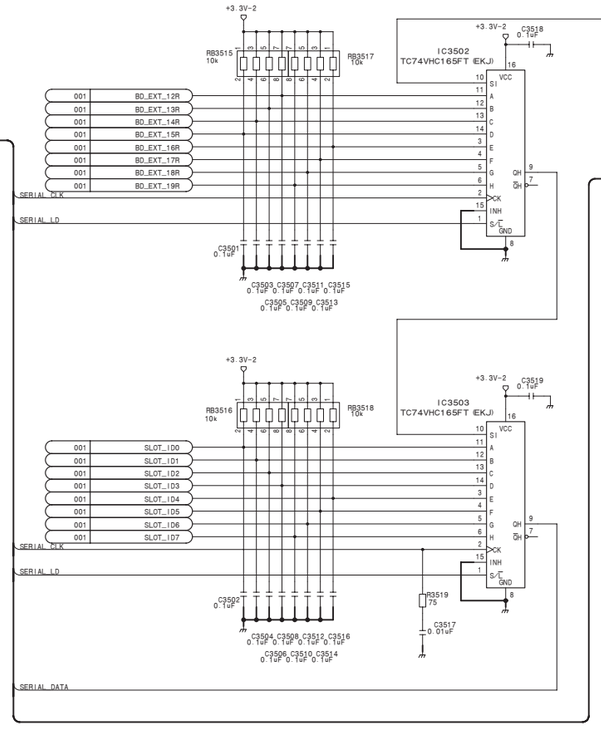

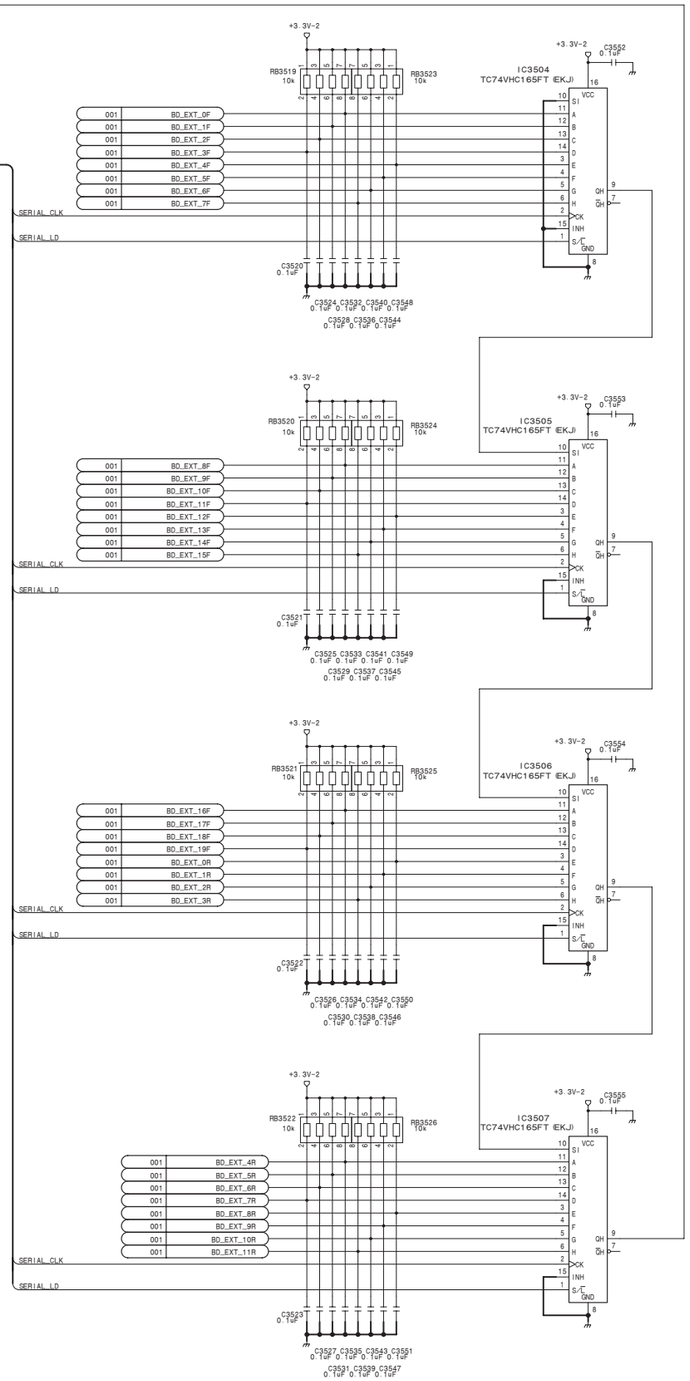

SELF DIAG

CA-82A (35/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_35

CA-82A (36/42)
SUFFIX: -14

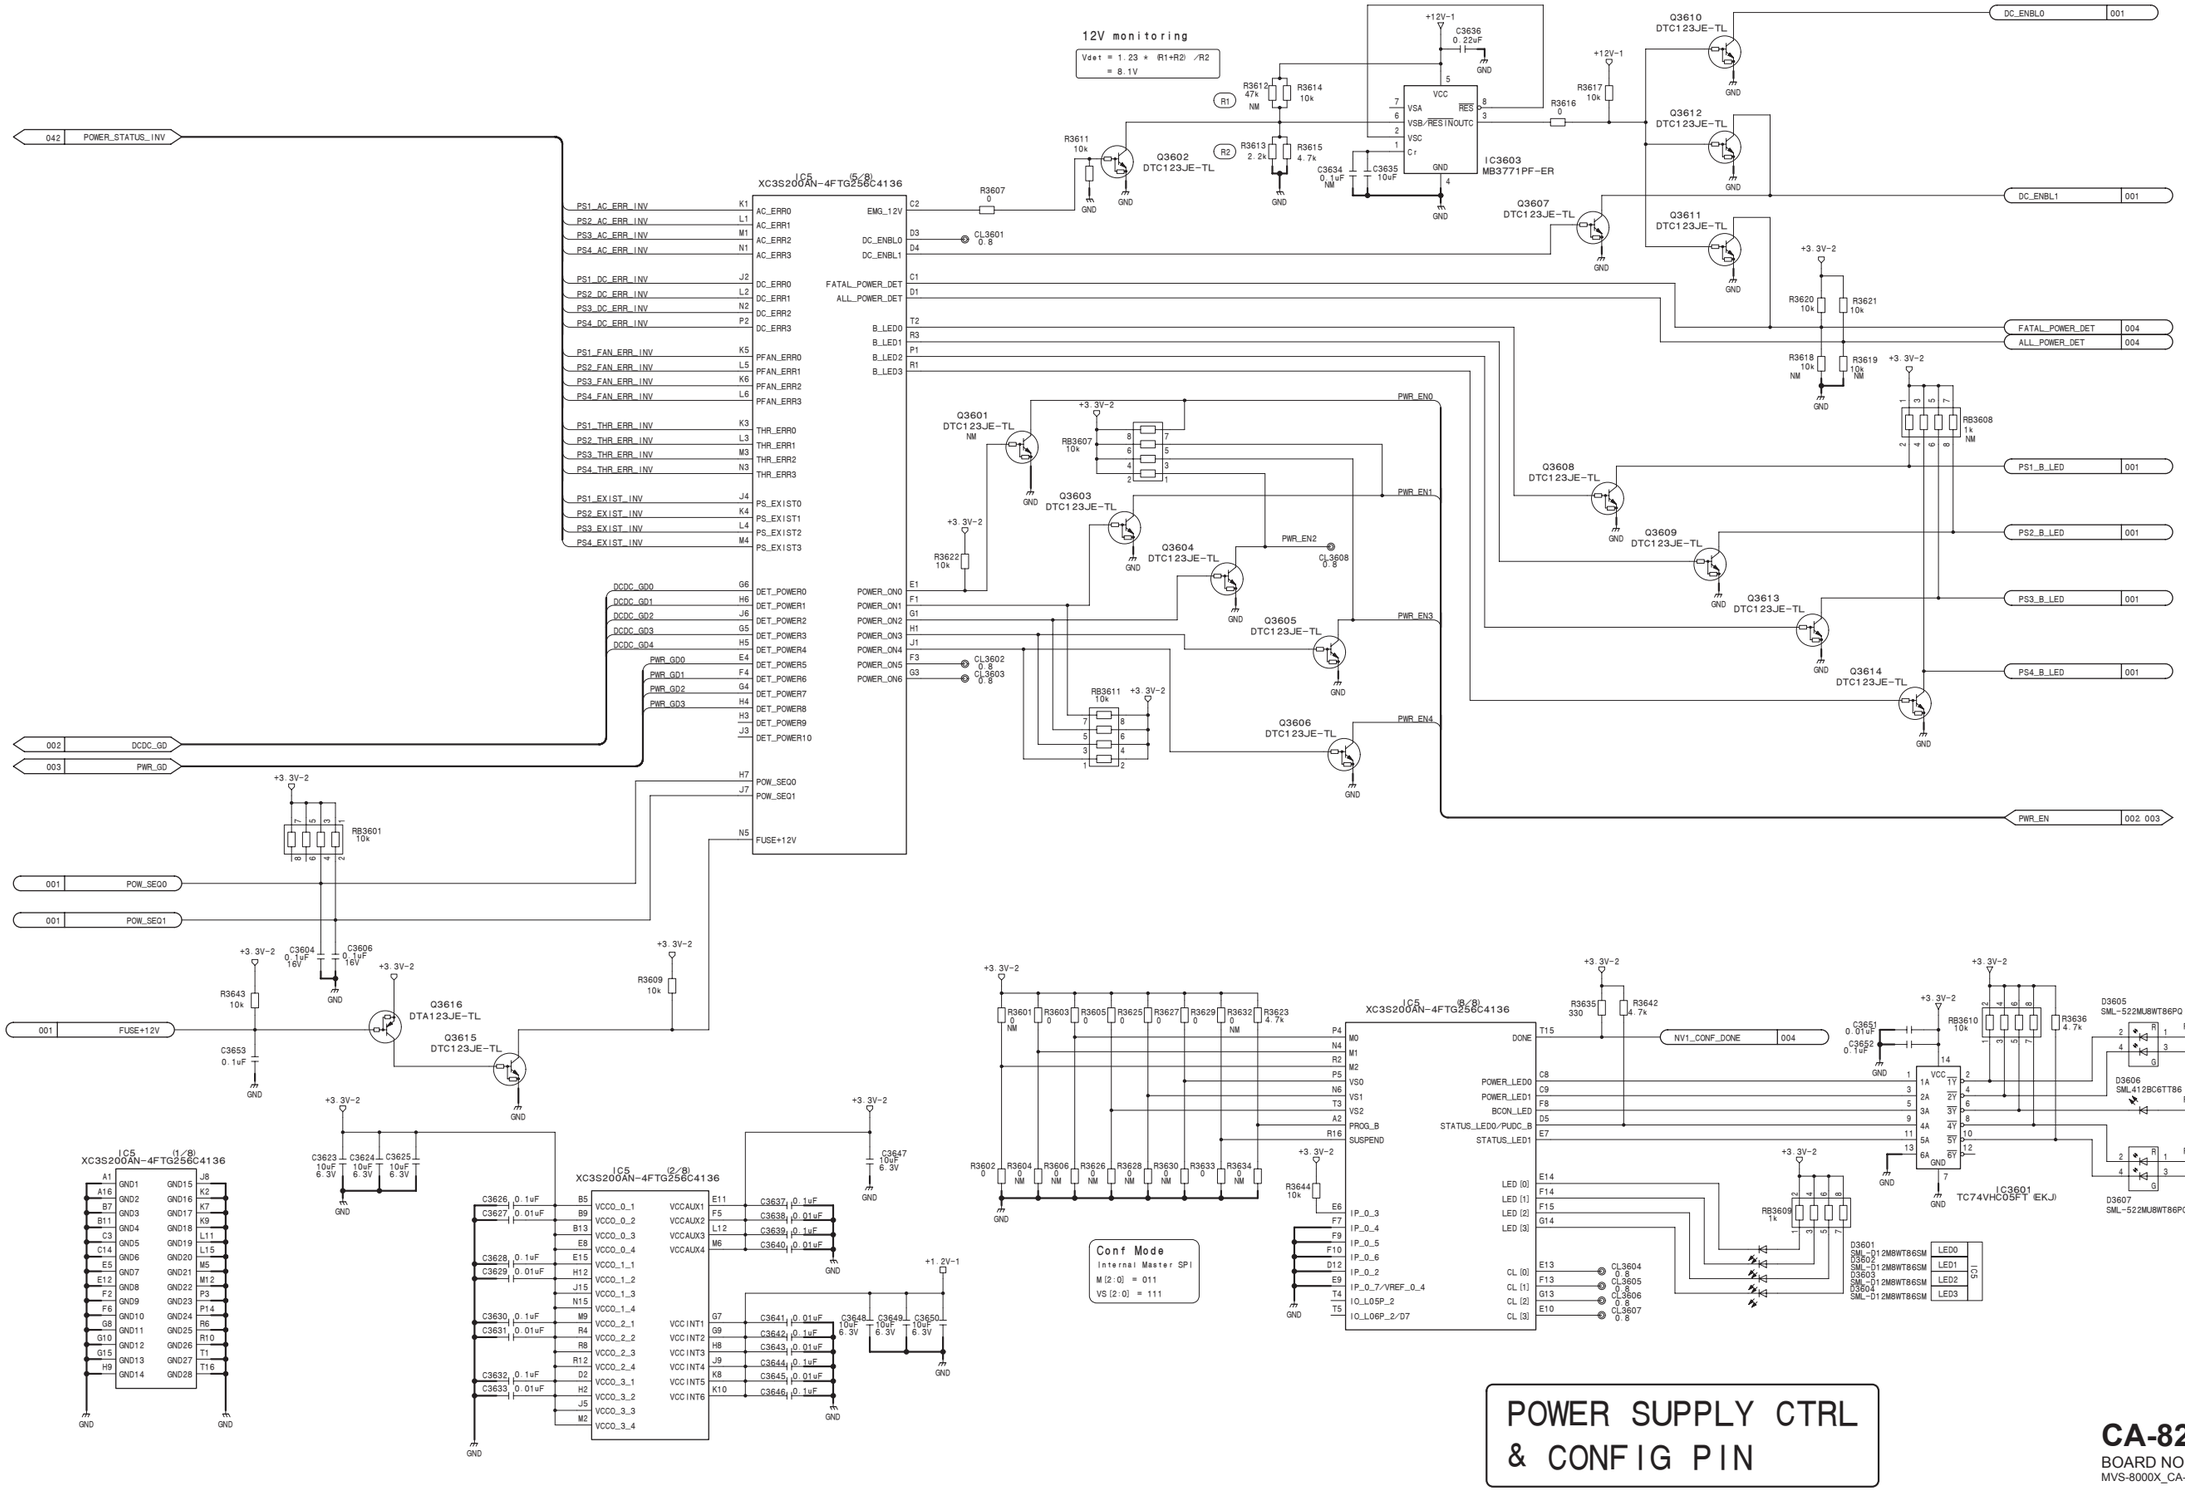

POWER SUPPLY CTRL
& CONFIG PIN

CA-82A (36/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_36

CA-82A (37/42)
SUFFIX: -14

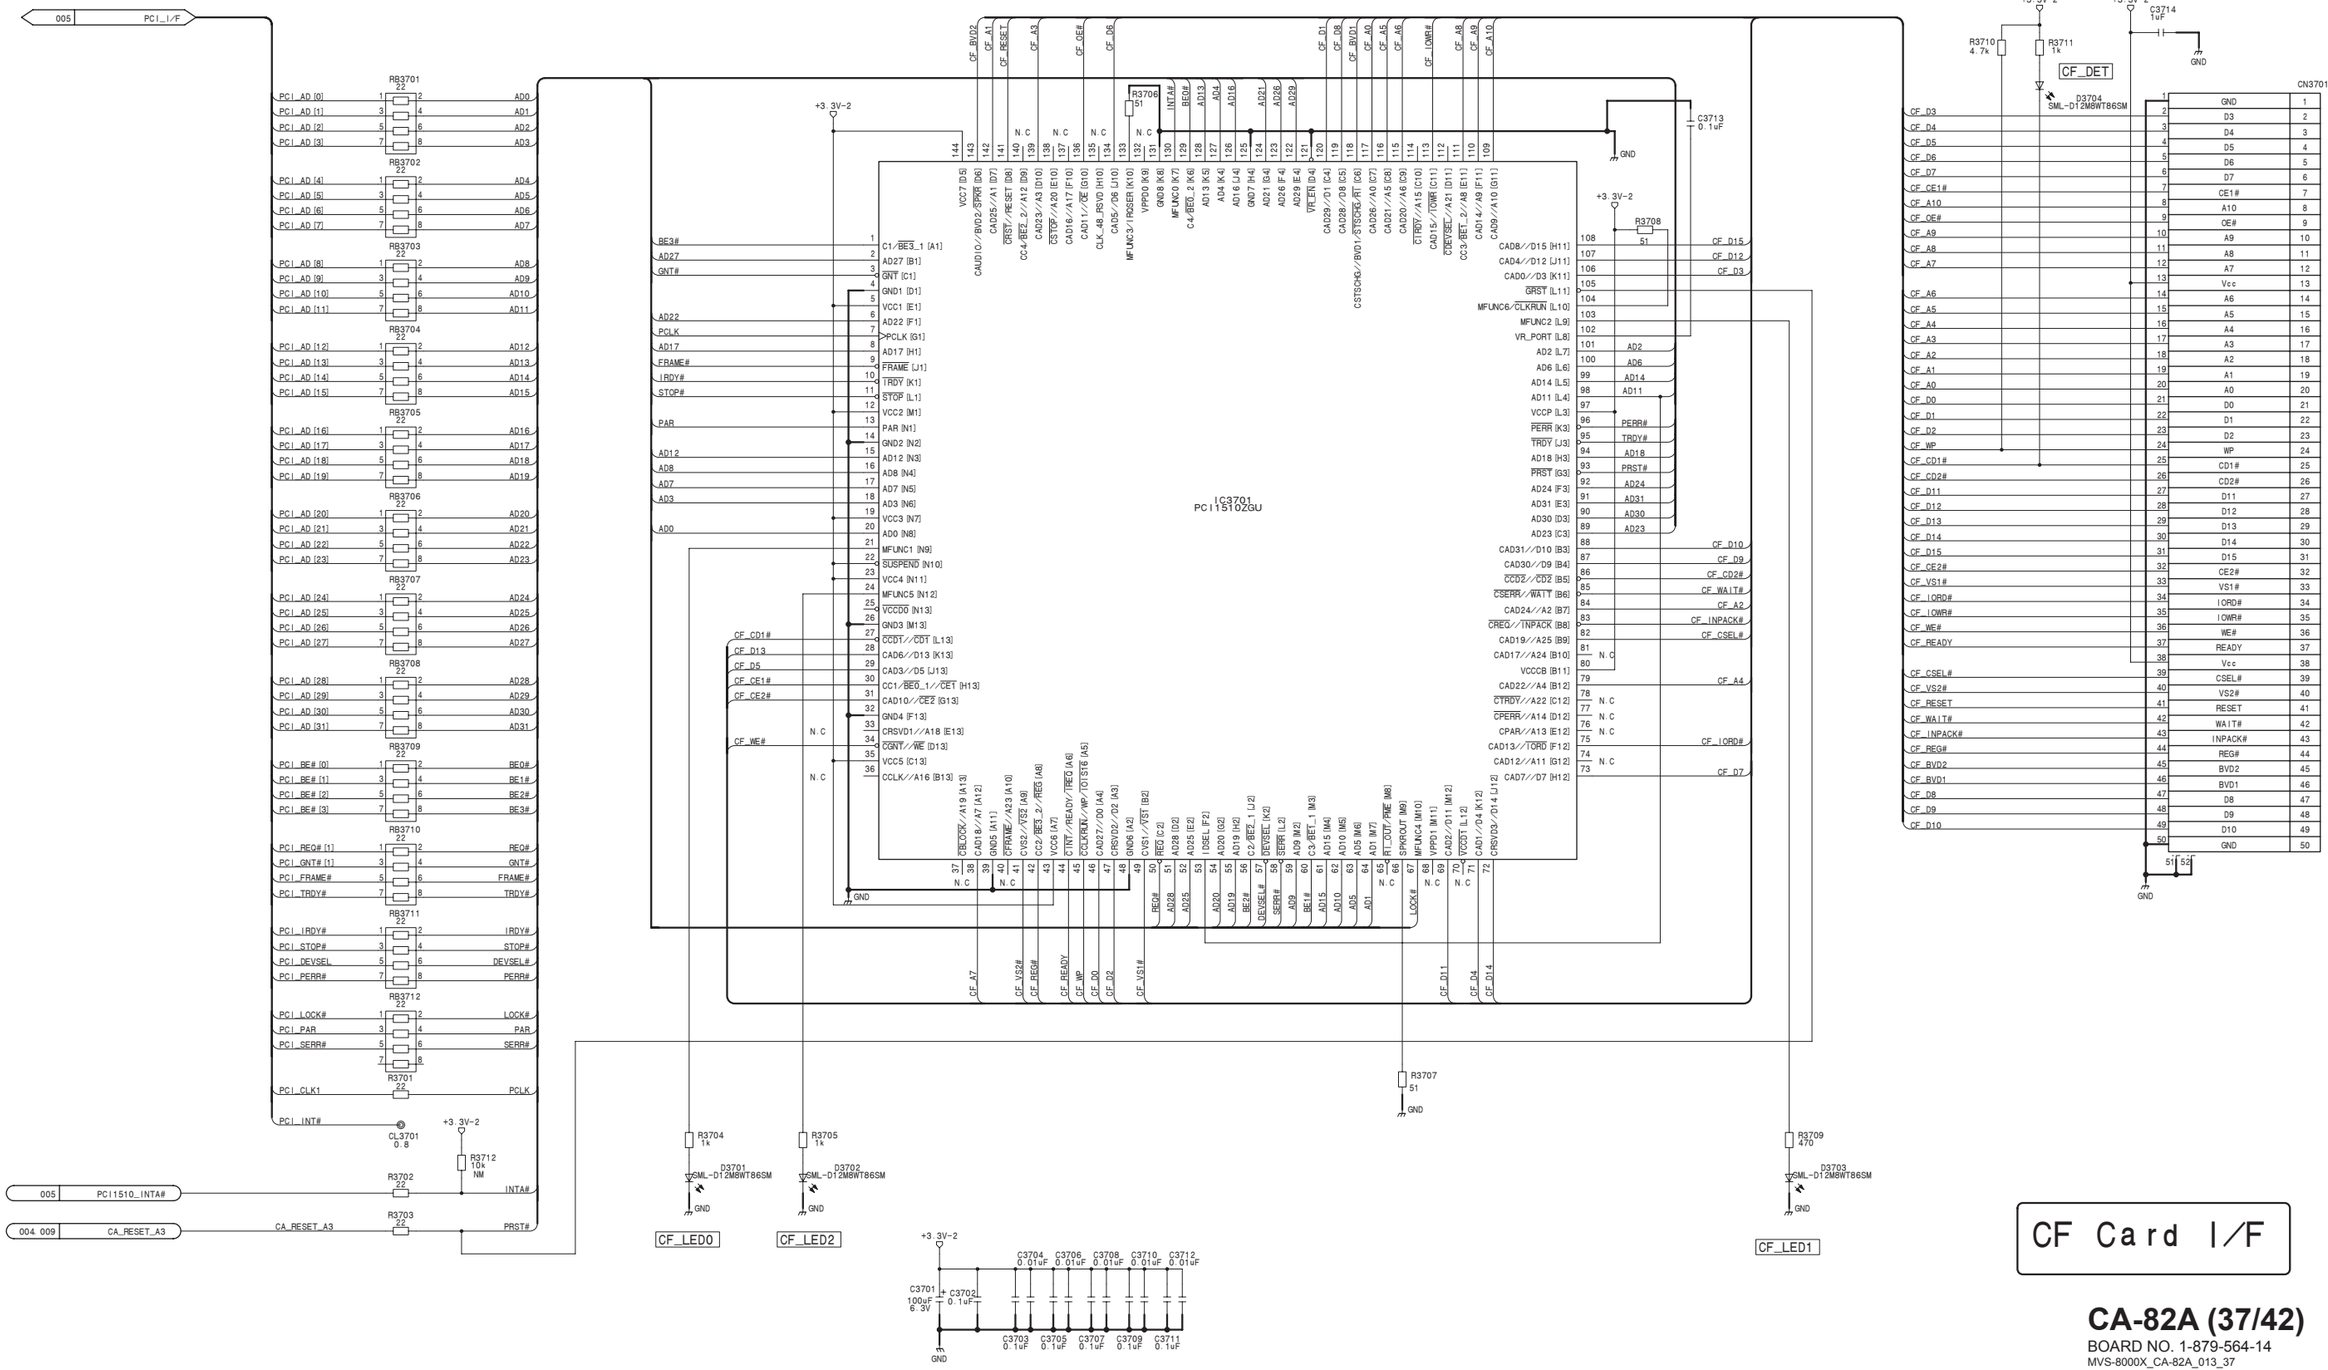

CF Card I/F

CA-82A (37/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_37

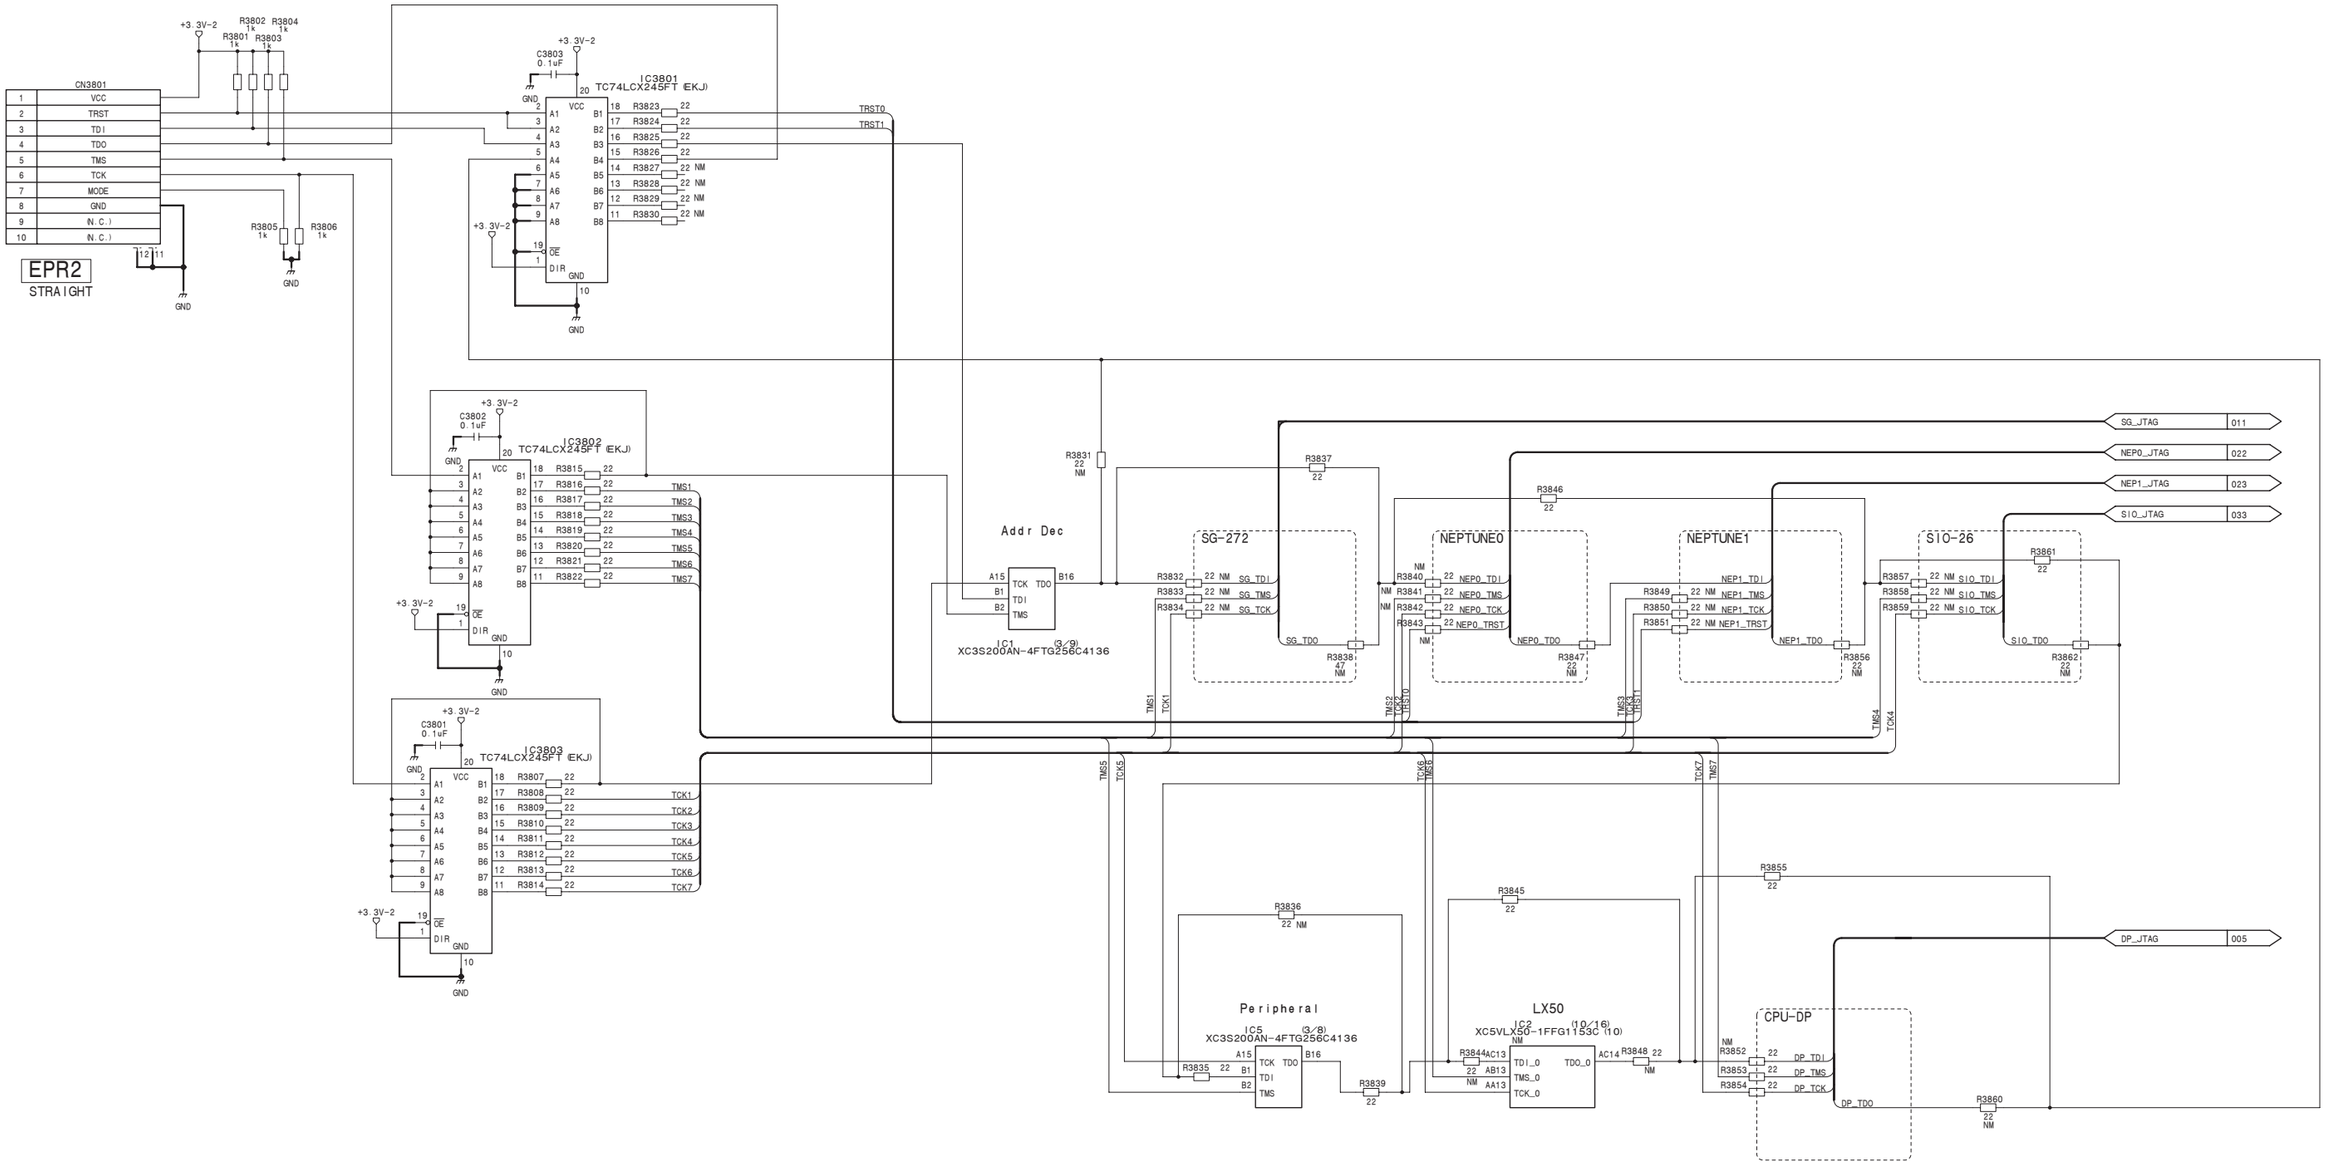

JTAG I/F

CA-82A (38/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_38

CA-82A (39/42)
SUFFIX: -14

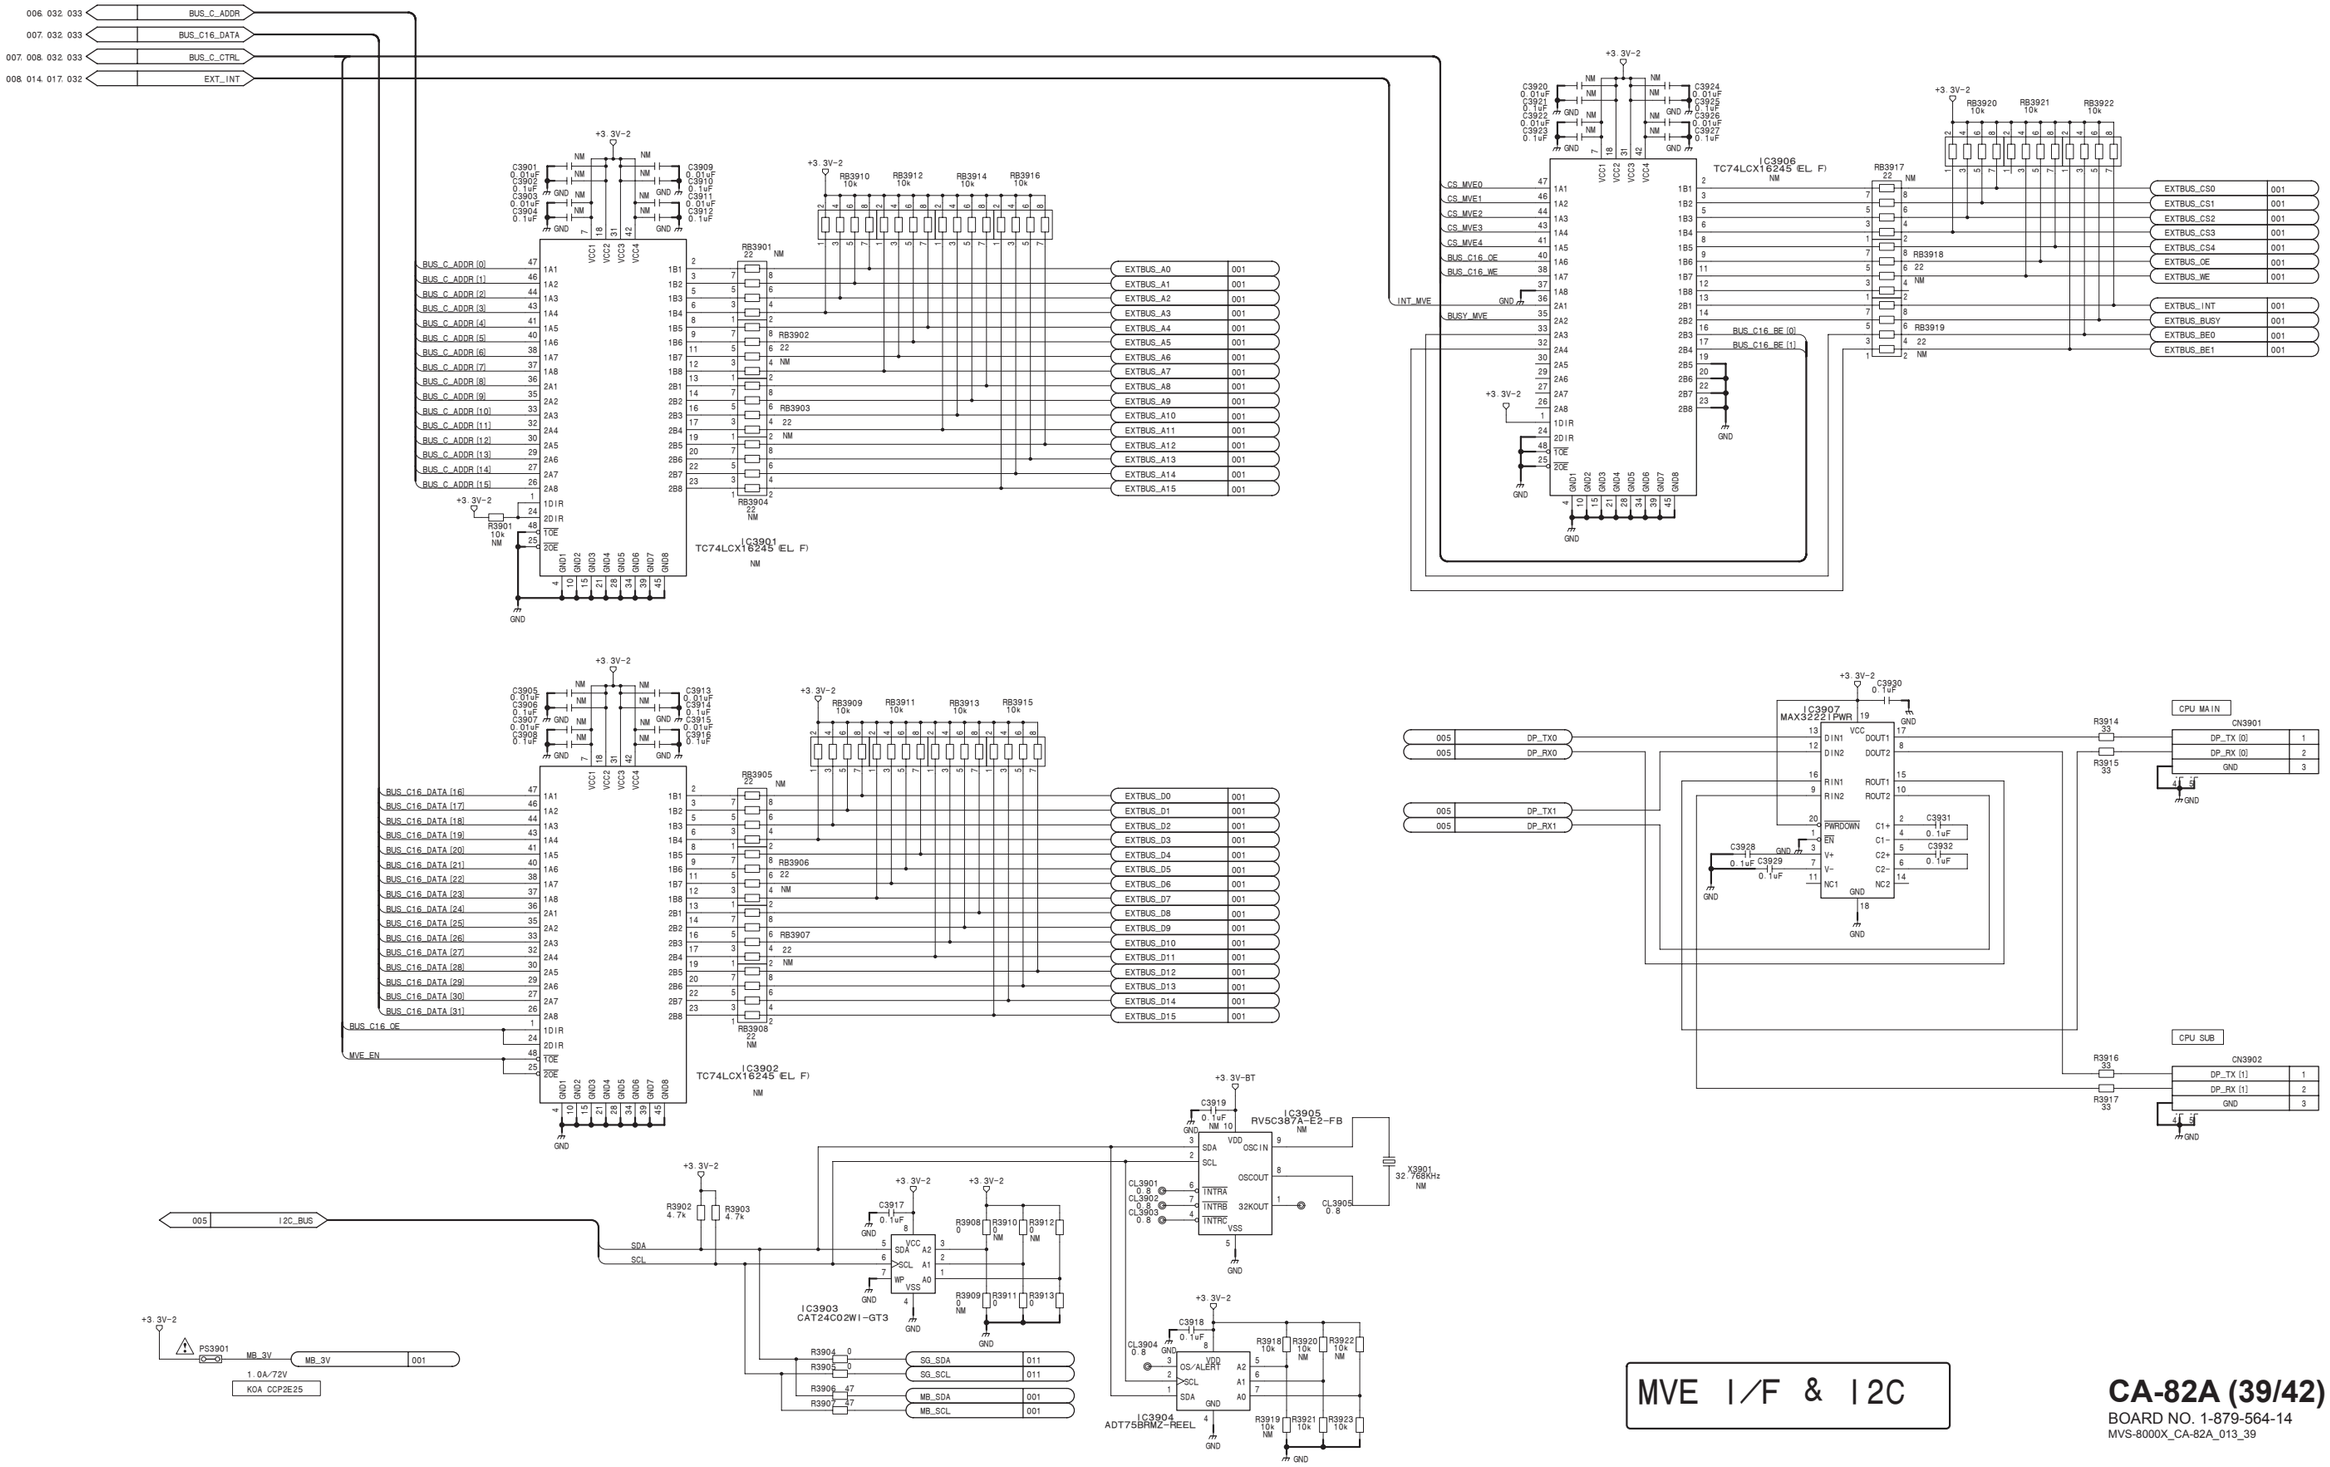

MVE I/F & I2C

CA-82A (39/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_39

CA-82A (40/42)
SUFFIX: -14

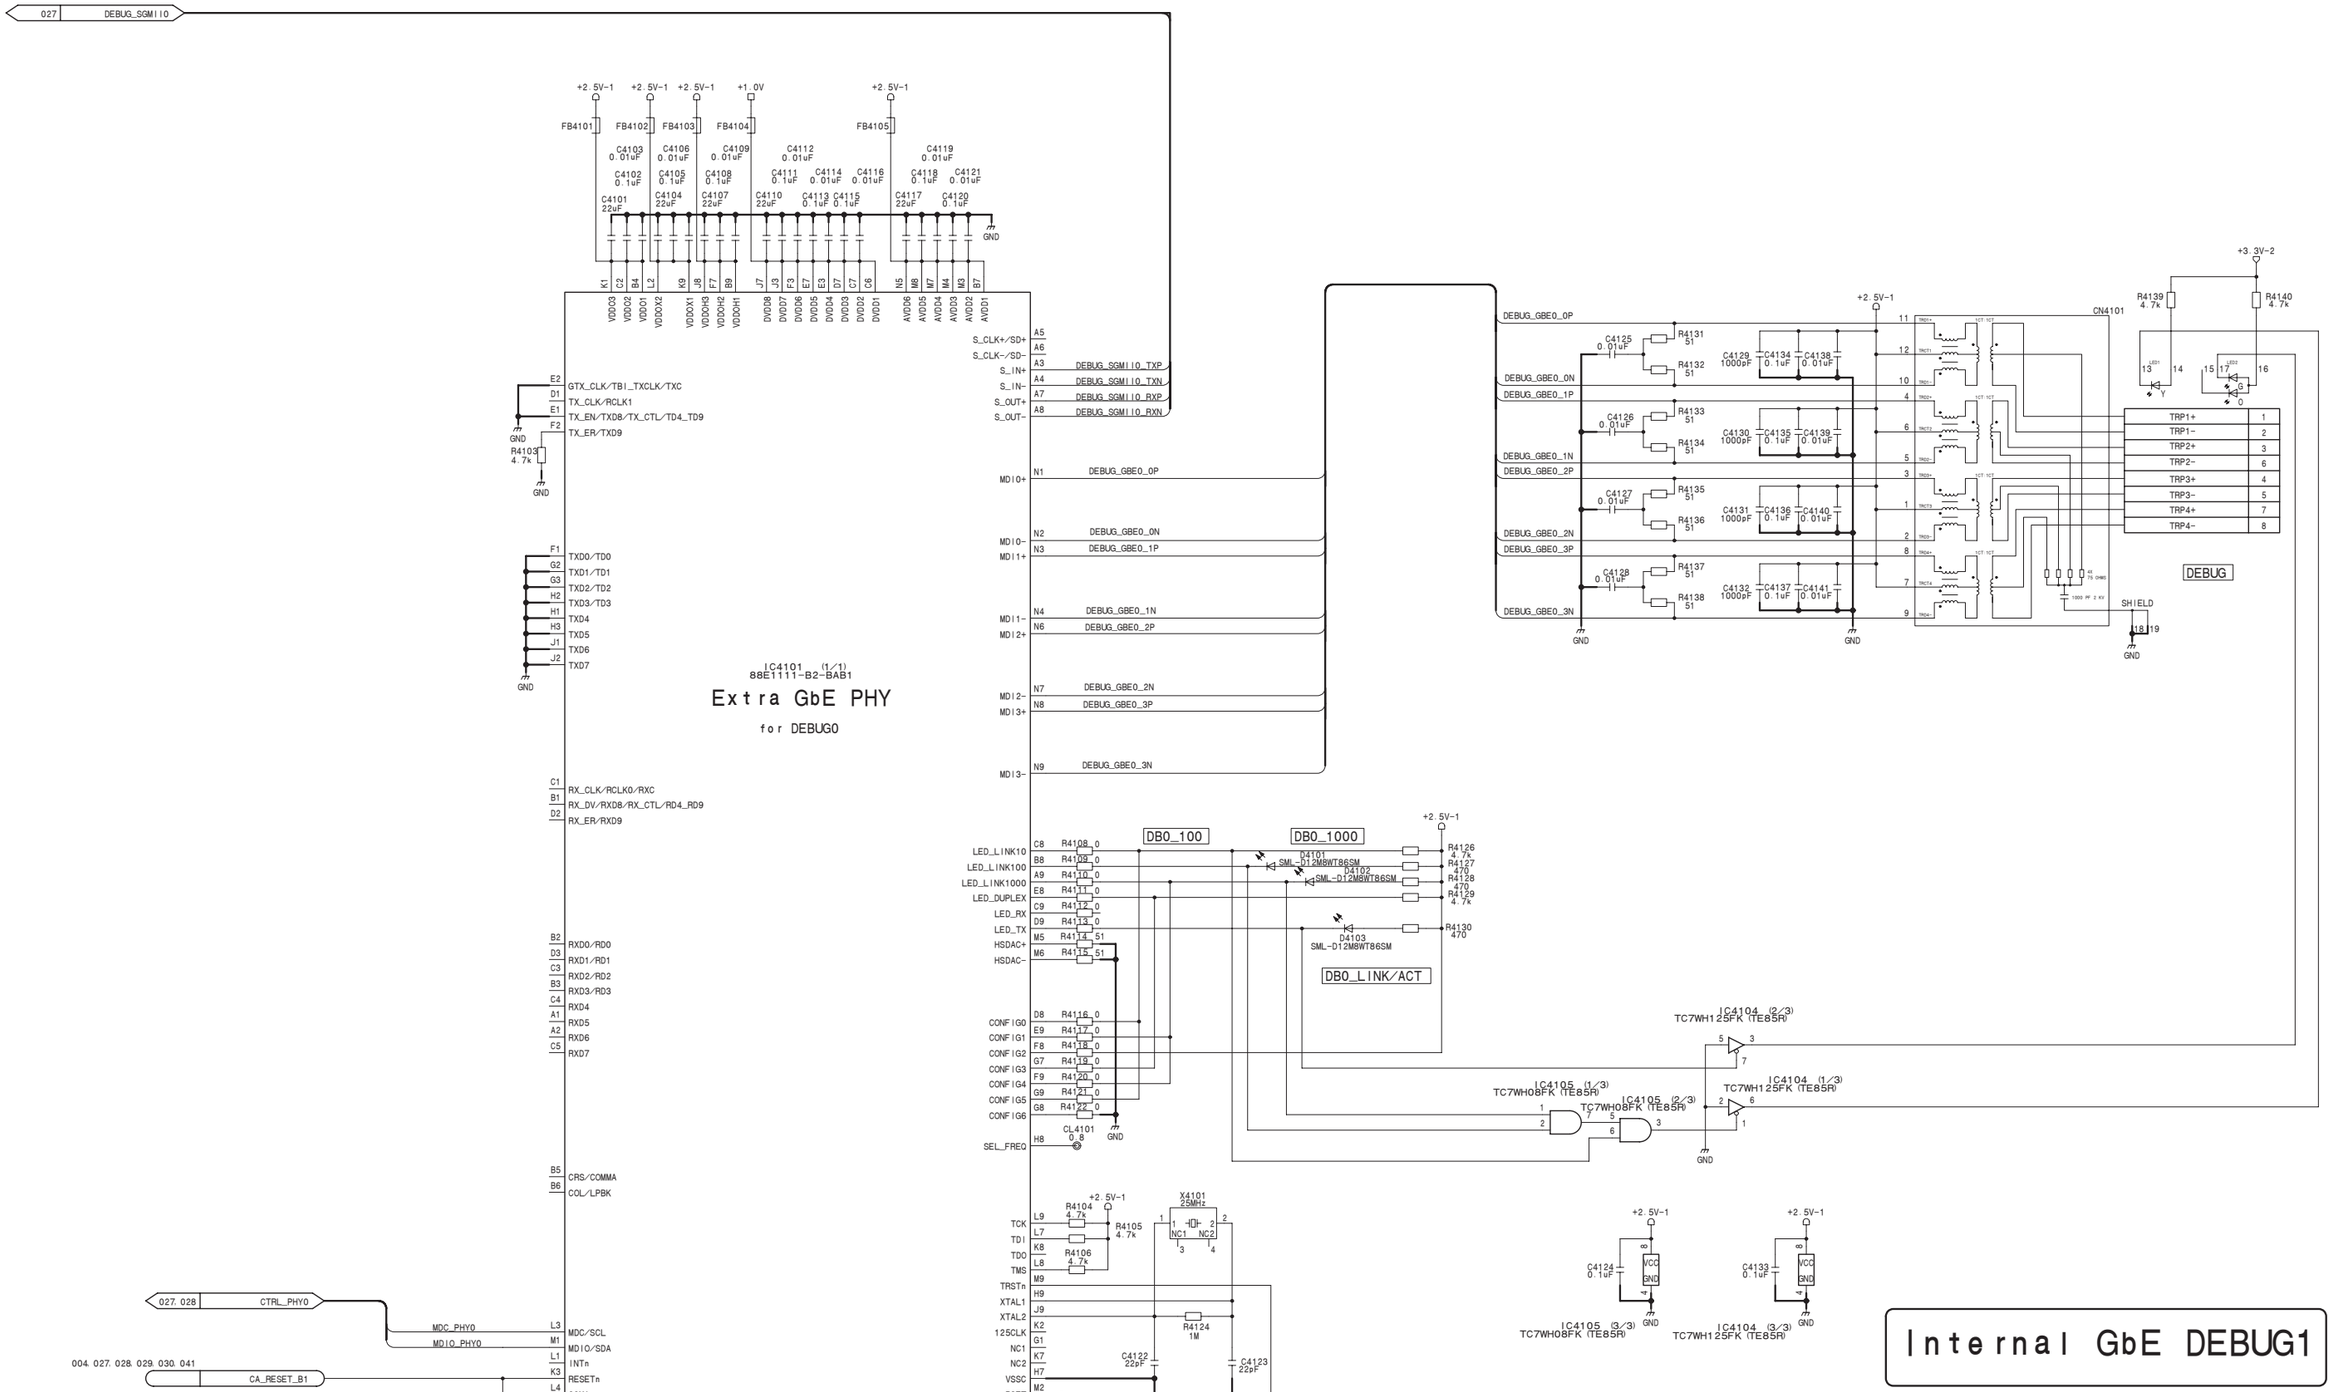

Internal GbE DEBUG1

CA-82A (40/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_40

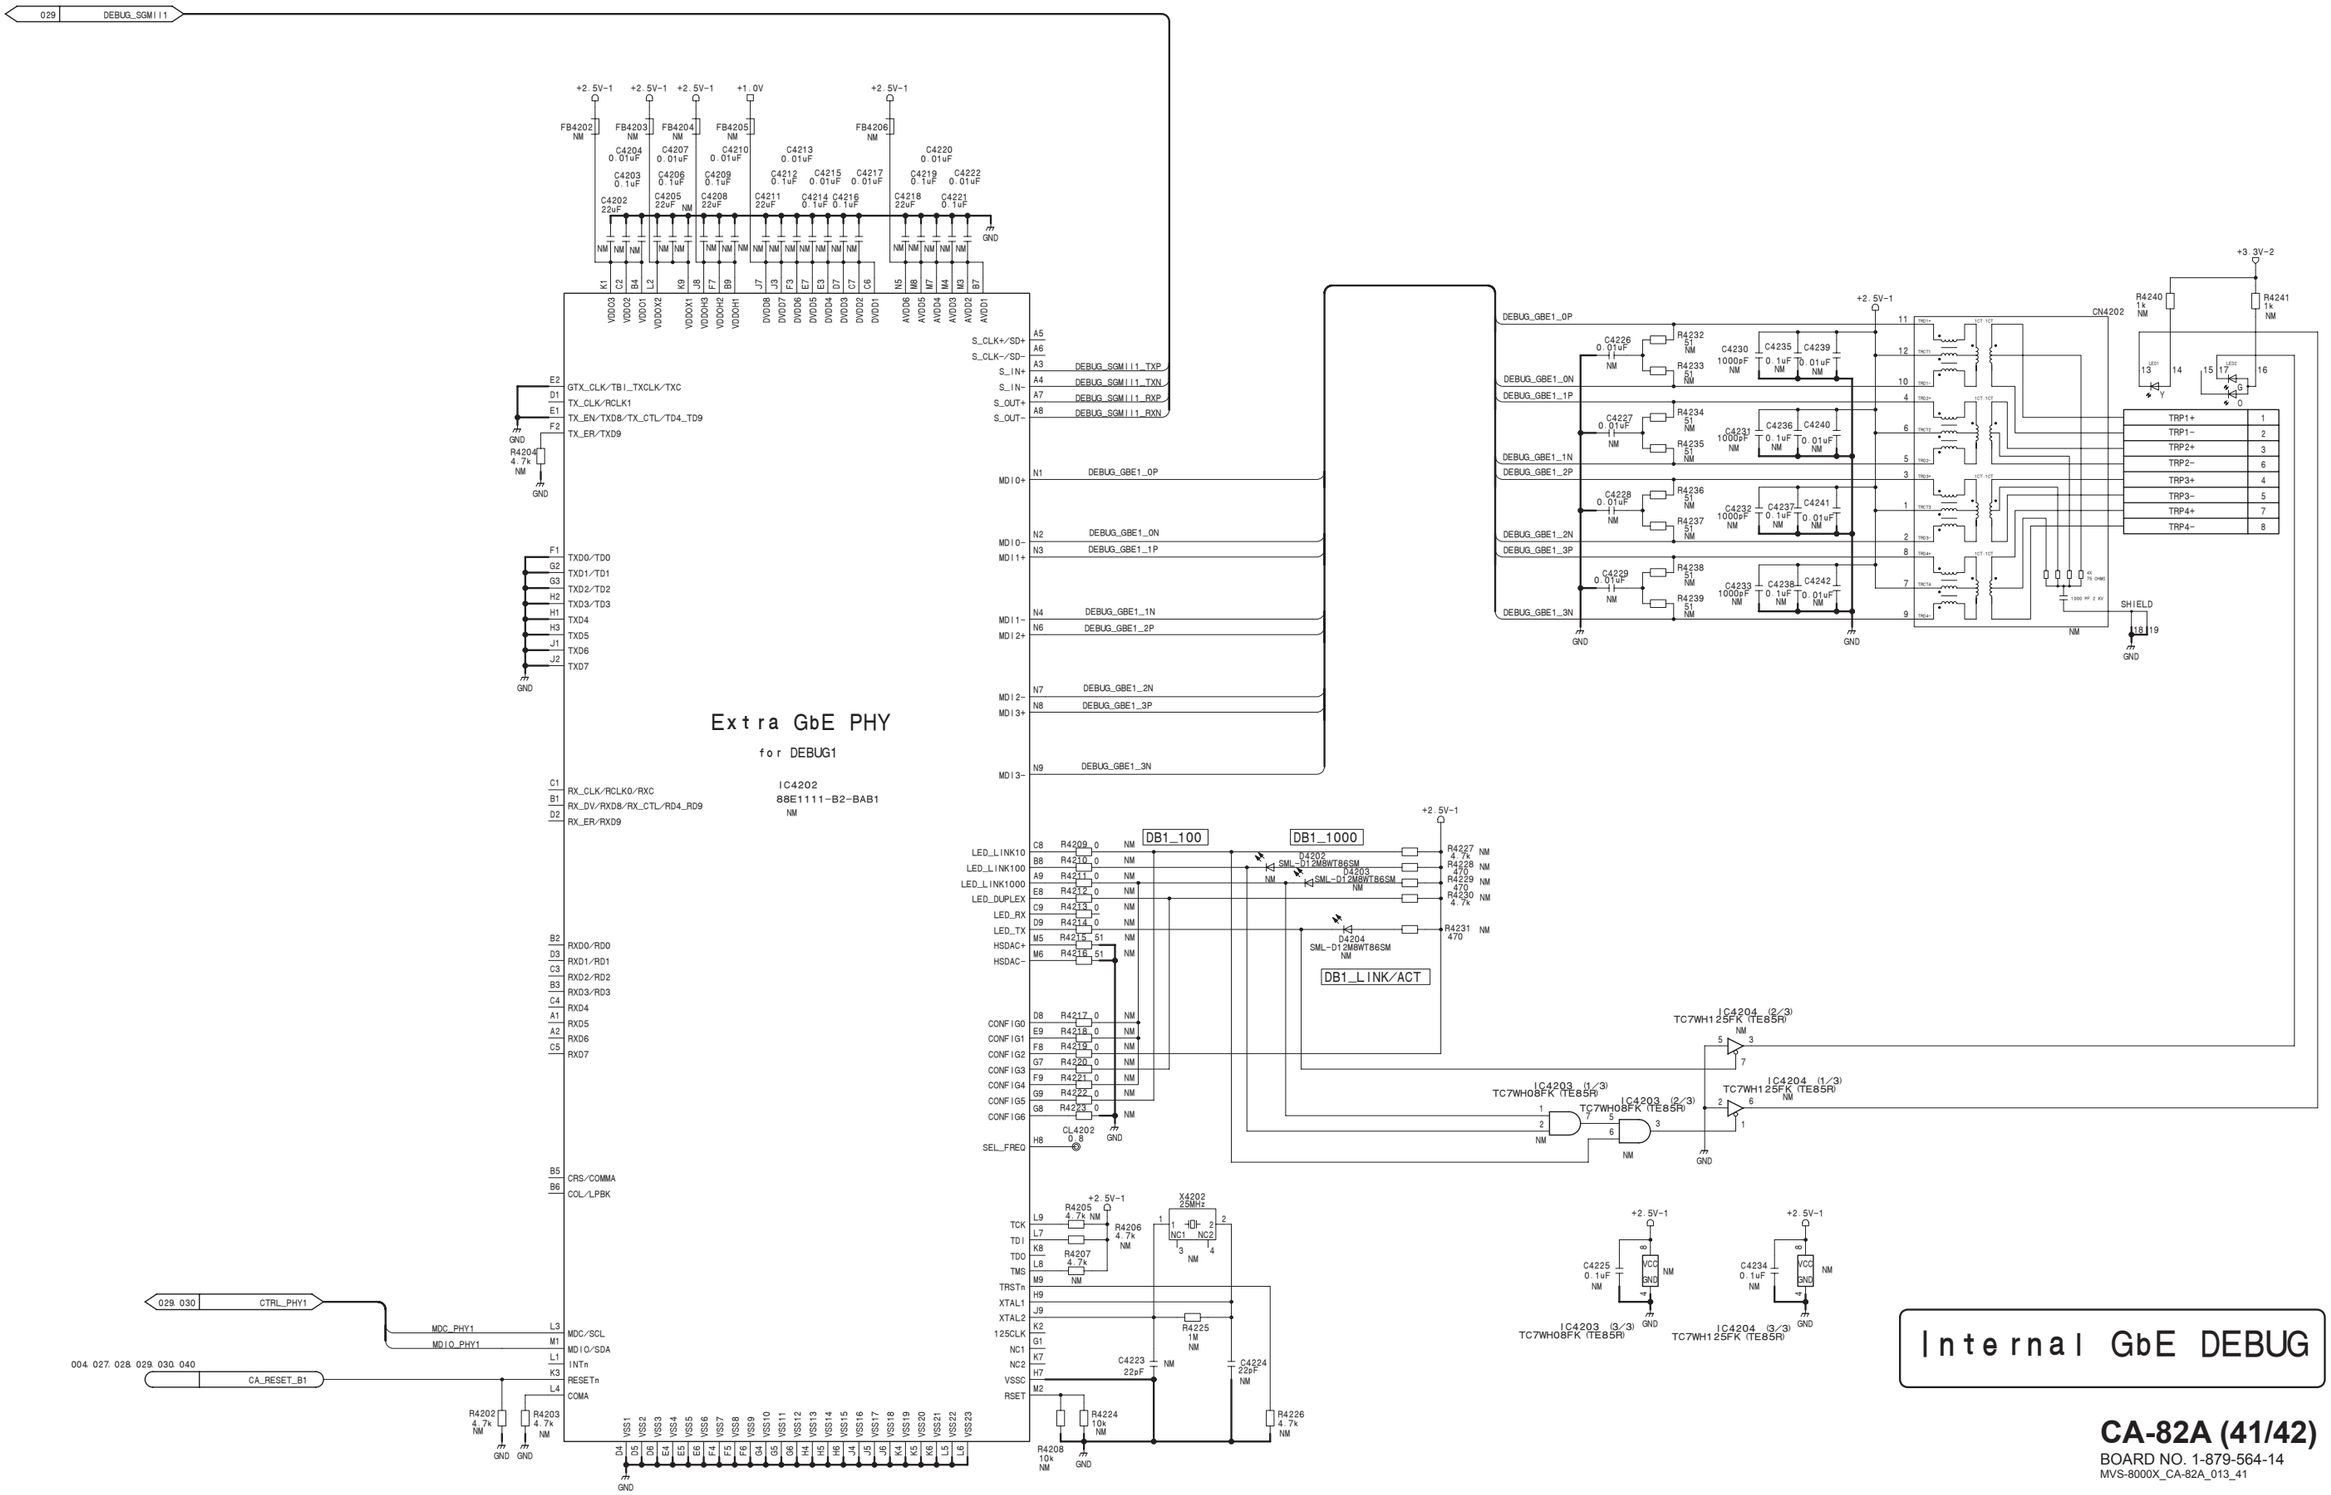

CA-82A (41/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_41

CA-82A (42/42)
SUFFIX: -14

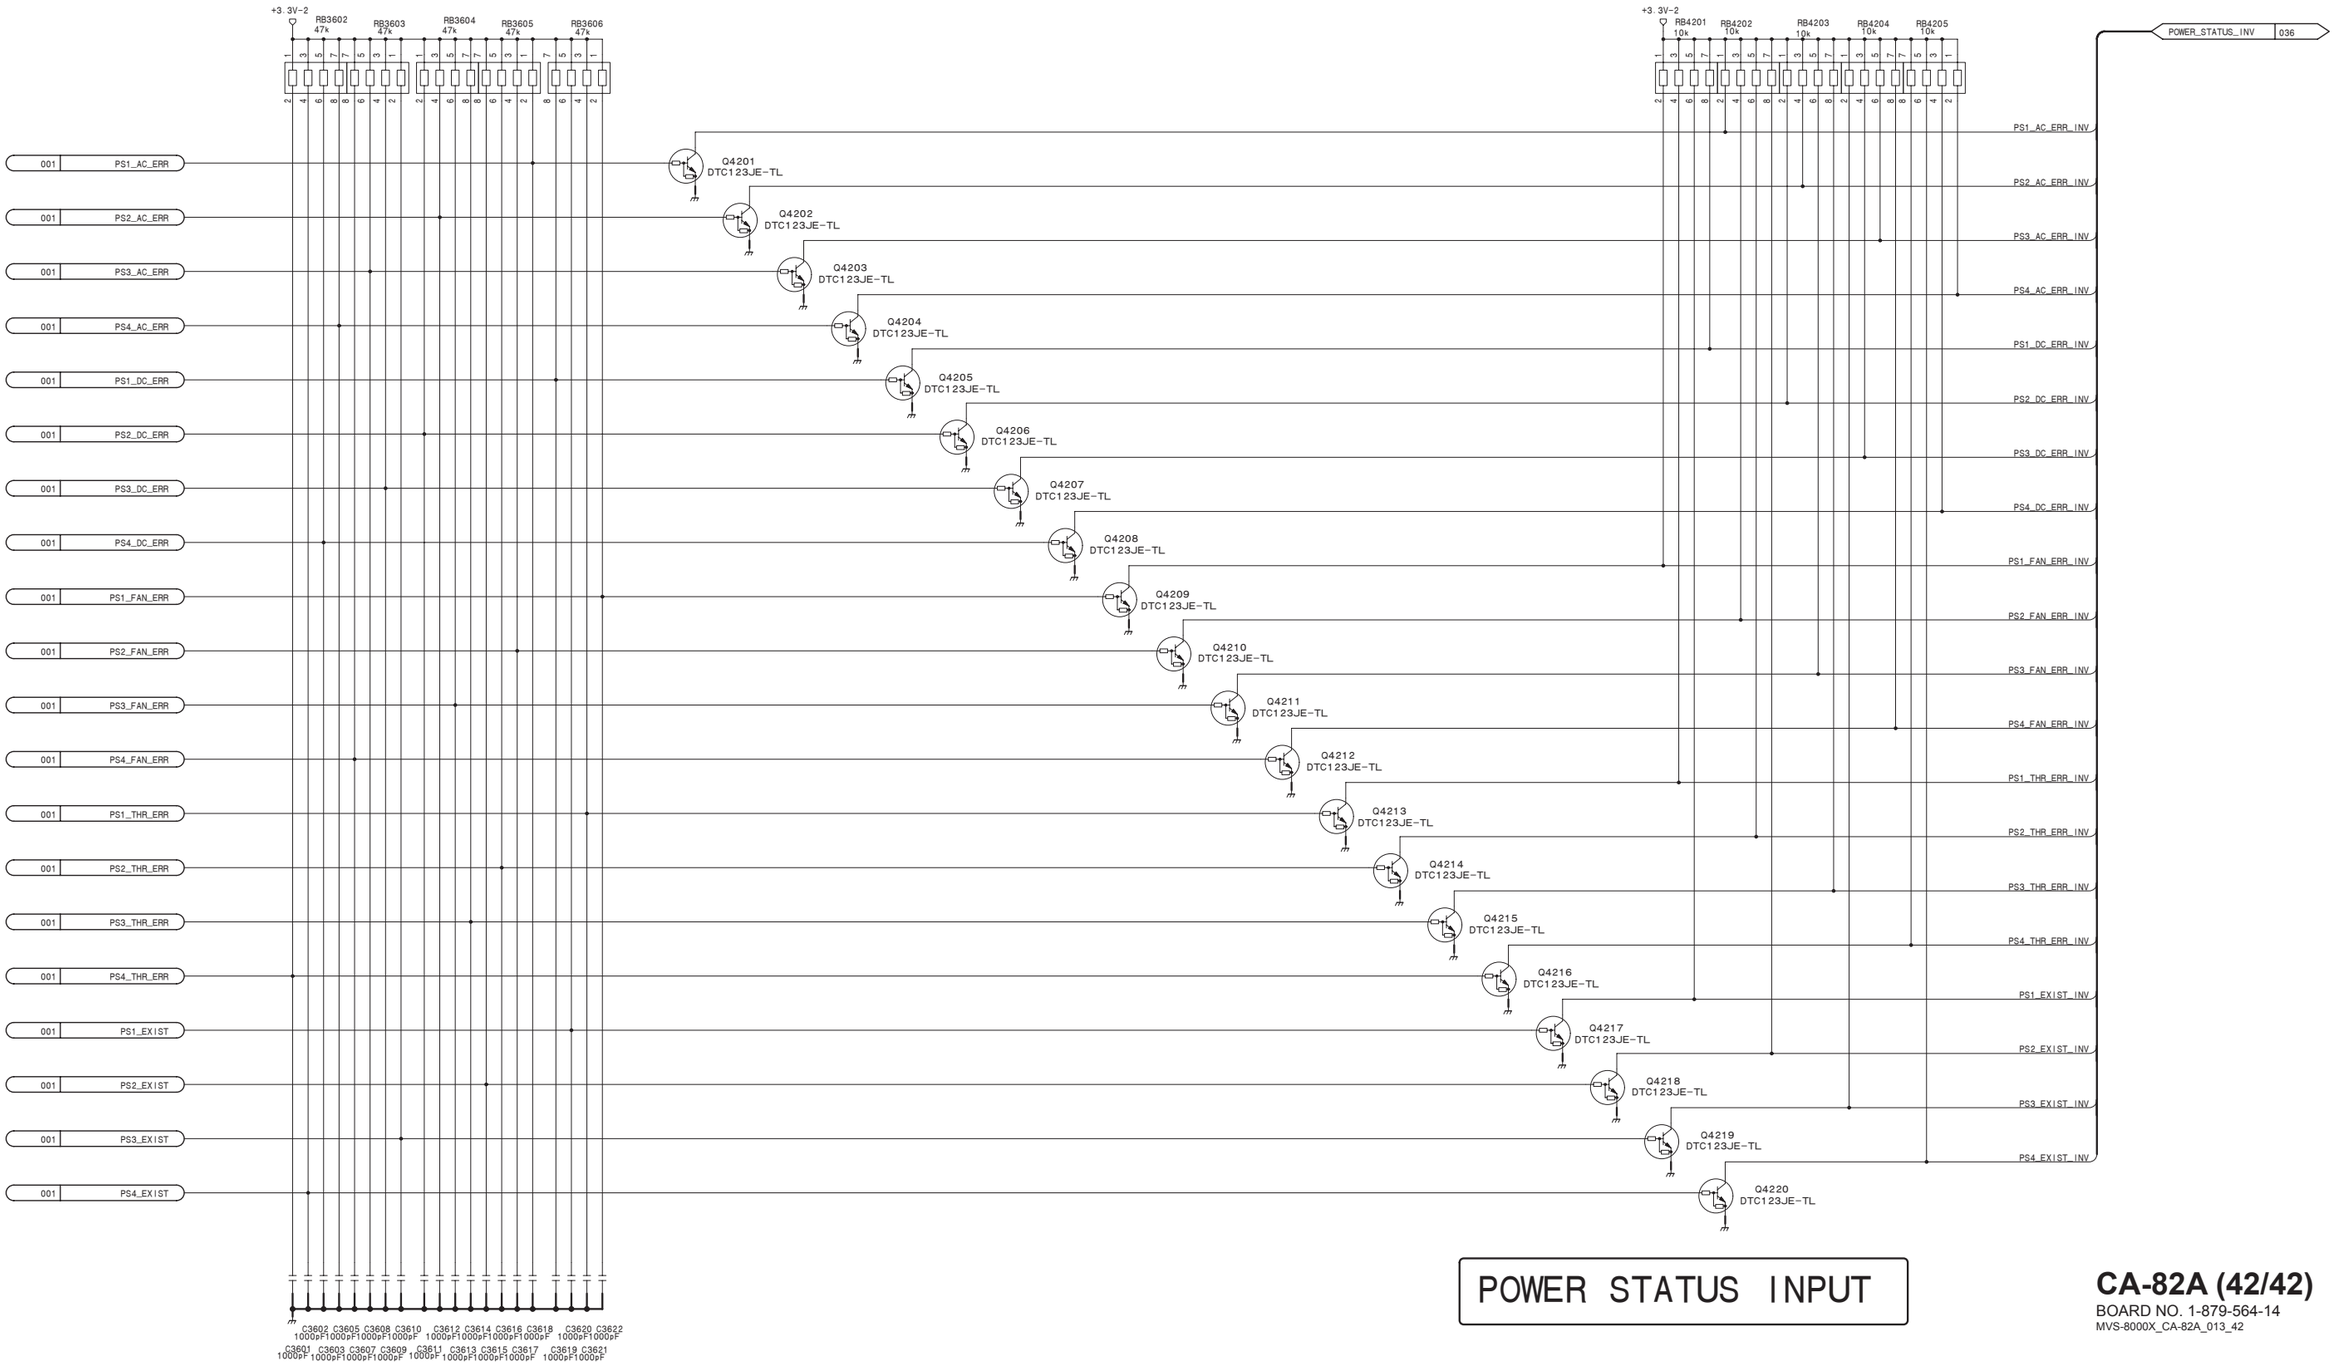

POWER STATUS INPUT

CA-82A (42/42)
BOARD NO. 1-879-564-14
MVS-8000X_CA-82A_013_42

4-86

CN-3233 (1/4)

SUFFIX: -12

CN-3233 (1/4)

SUFFIX: -12

CNB1

10	+12V	+12V	+12V	+12V	+12V	+12V
9	+12V	+12V	+12V	+12V	+12V	+12V
8	+12V	+12V	+12V	+12V	+12V	+12V
7						
6	(DC_ENABLE0)	(DC_ENABLE1)	GND	(SD/HD0)	FUSE+12V	GND
5	(BD_EXT_F)	BD_EXT_R	GND	(SD/HD1)	(SD/HD2)	GND
4	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
3	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
1	(RESET_0L)	(RESET_1L)	GND	(RESET_2L)	(RESET_3L)	GND
	A	B	BG	C	D	DG

CNE1

10		TC_IN	GND		REF_IN0	GND
9	(REF_IN2)		GND	(REF_IN1)		GND
8	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
7	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
6	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
5	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
4			GND	EXTHUB1_INT		GND
3			GND			GND
2			GND			GND
1			GND			GND
	A	B	BG	C	D	DG

CNF1

10	GBE0_TRX2P	GBE0_TRX2N	GND	GBE0_TRX3P	GBE0_TRX3N	GND
9	GBE0_TRX0P	GBE0_TRX0N	GND	GBE0_TRX1P	GBE0_TRX1N	GND
8	GBE0_LED_L	GBE0_LED_R	GND	GBE1_LED_L	GBE1_LED_R	GND
7	GBE1_TRX2P	GBE1_TRX2N	GND	GBE1_TRX3P	GBE1_TRX3N	GND
6	GBE1_TRX0P	GBE1_TRX0N	GND	GBE1_TRX1P	GBE1_TRX1N	GND
5	GBE2_TRX2P	GBE2_TRX2N	GND	GBE2_TRX3P	GBE2_TRX3N	GND
4	GBE2_TRX0P	GBE2_TRX0N	GND	GBE2_TRX1P	GBE2_TRX1N	GND
3	GBE2_LED_L	GBE2_LED_R	GND	GBE3_LED_L	GBE3_LED_R	GND
2	GBE3_TRX2P	GBE3_TRX2N	GND	GBE3_TRX3P	GBE3_TRX3N	GND
1	GBE3_TRX0P	GBE3_TRX0N	GND	GBE3_TRX1P	GBE3_TRX1N	GND
	A	B	BG	C	D	DG

(No Mount @CN-3234)

CNM1

10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
6	GPI2_OUT1	GPI2_IN1	GND	GPI1_OUT1	GPI1_IN1	GND
5	GPI2_OUT2	GPI2_IN2	GND	GPI1_OUT2	GPI1_IN2	GND
4	GPI2_OUT3	GPI2_IN3	GND	GPI1_OUT3	GPI1_IN3	GND
3	GPI2_OUT4	GPI2_IN4	GND	GPI1_OUT4	GPI1_IN4	GND
2	GPI2_OUT5	GPI2_IN5	GND	GPI1_OUT5	GPI1_IN5	GND
1	GPI2_OUT6	GPI2_IN6	GND	GPI1_OUT6	GPI1_IN6	GND
	A	B	BG	C	D	DG

CNN1

10	GPI2_OUT7	GPI2_IN7	GND	GPI1_OUT7	GPI1_IN7	GND
9	GPI2_OUT8	GPI2_IN8	GND	GPI1_OUT8	GPI1_IN8	GND
8			GND			GND
7			GND			GND
6			GND			GND
5			GND			GND
4			GND			GND
3			GND			GND
2			GND			GND
1			GND			GND
	A	B	BG	C	D	DG

EEPROM Addr

A2	A1	A0	Board	Ref	
0	0	0	CA-82	CPU-DP	YES
0	0	1	CA-82	CPU-DP	YES
0	1	0	CN-3234	IC161	NO
0	1	1	CN-3234	IC162	NO
1	0	0	CA-82	IC3903	YES
1	0	1	CN-3233	IC162	YES
1	1	0	CN-3233	IC161	YES
1	1	1	CA-82	SG	YES

Temp. Sensor

Device Addr	Board	Ref	Mount	
1001 000	CN-3234	IC163	NO	LM73
1001 001	CA-82	IC3904	NO	
1001 010	CN-3233	IC163	NO	
1001 011				
1001 100	CA-82	IC3904	YES	ADT75
1001 101	CN-3233	IC164	NO	
1001 110	CN-3234	IC164	NO	
1001 111				

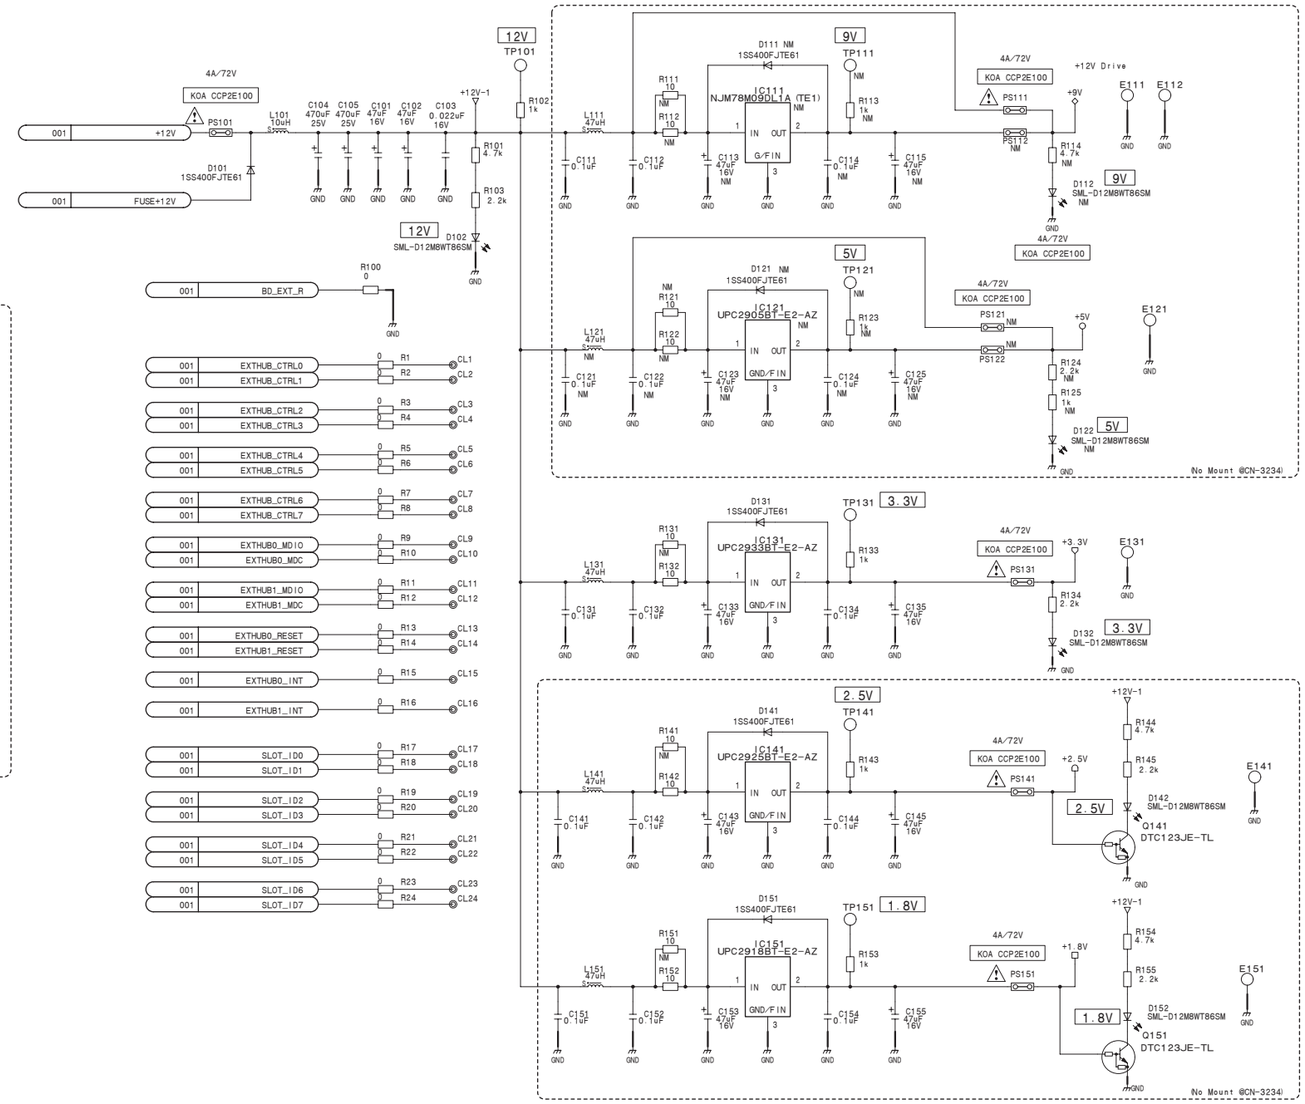

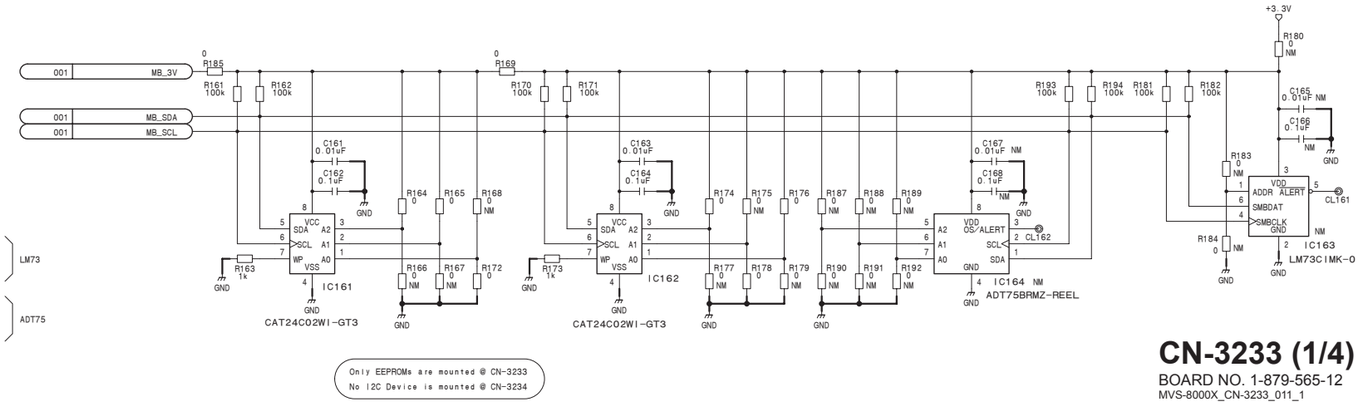

Only EEPROMs are mounted @ CN-3233
No I2C Device is mounted @ CN-3234

CN-3233 (1/4)

BOARD NO. 1-879-565-12

MVS-8000X_CN-3233_011_1

CN-3233 (2/4)
SUFFIX: -12

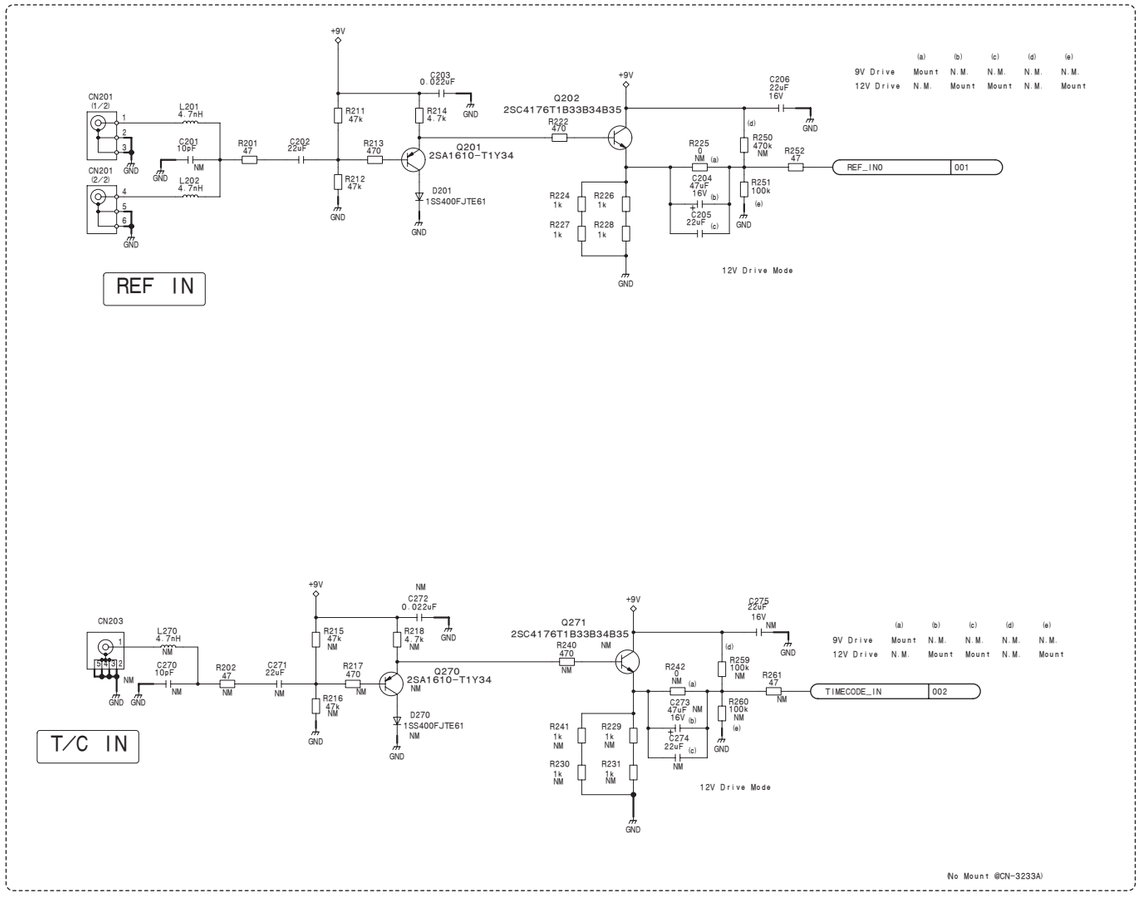

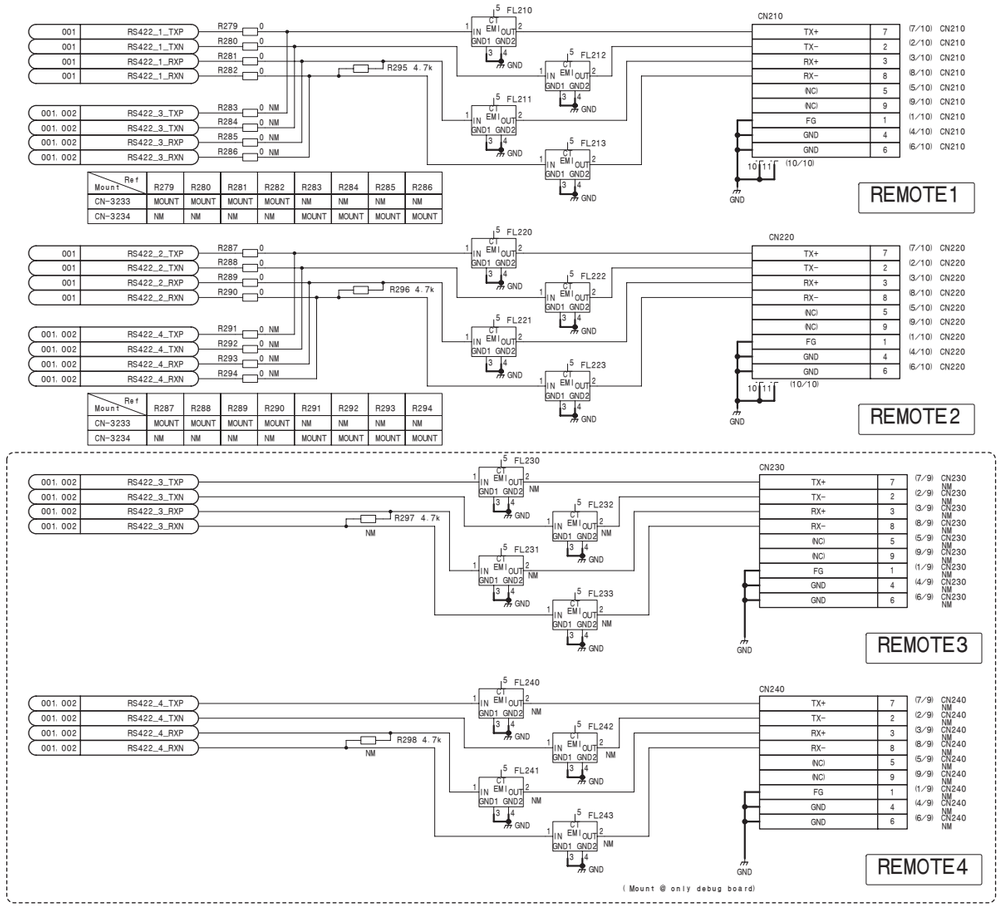

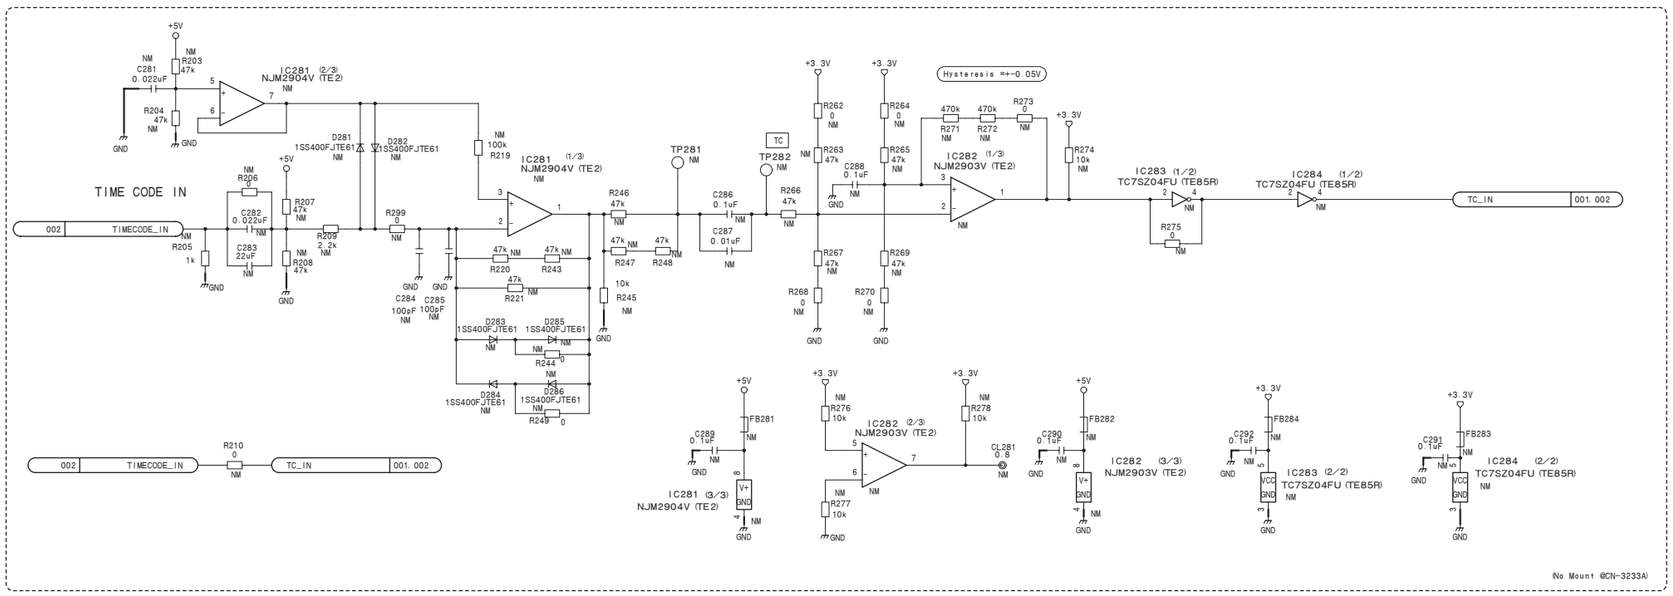

CN-3233 (2/4)
BOARD NO. 1-879-565-12
MVS-8000X_CN-3233_011_2

CN-3233 (3/4) SUFFIX: -12

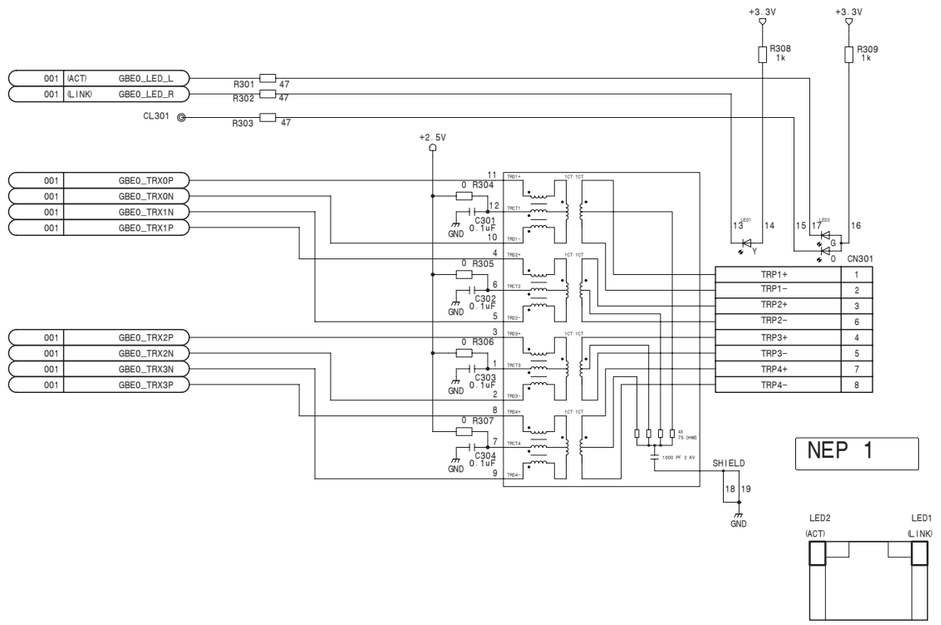

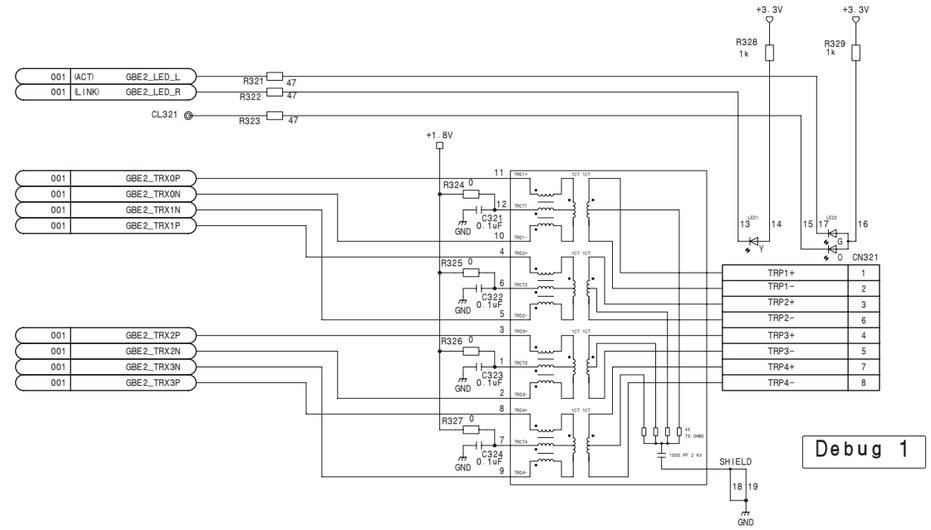

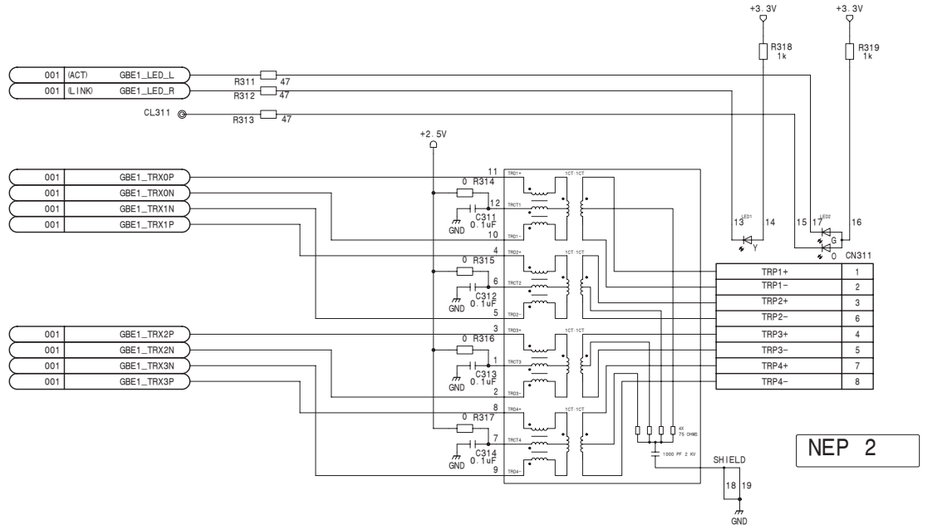

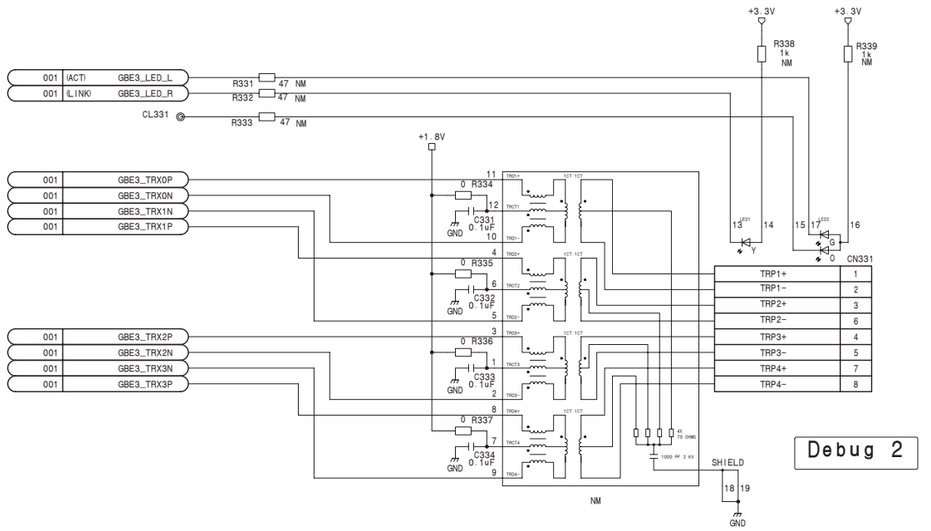

No Mount @CN-3233A)

CN-3233 (3/4)
BOARD NO. 1-879-565-12
MVS-8000X_CN-3233_011_3

A B C D E F G H

1 2 3 4 5

CN-3233 (4/4)
SUFFIX: -12

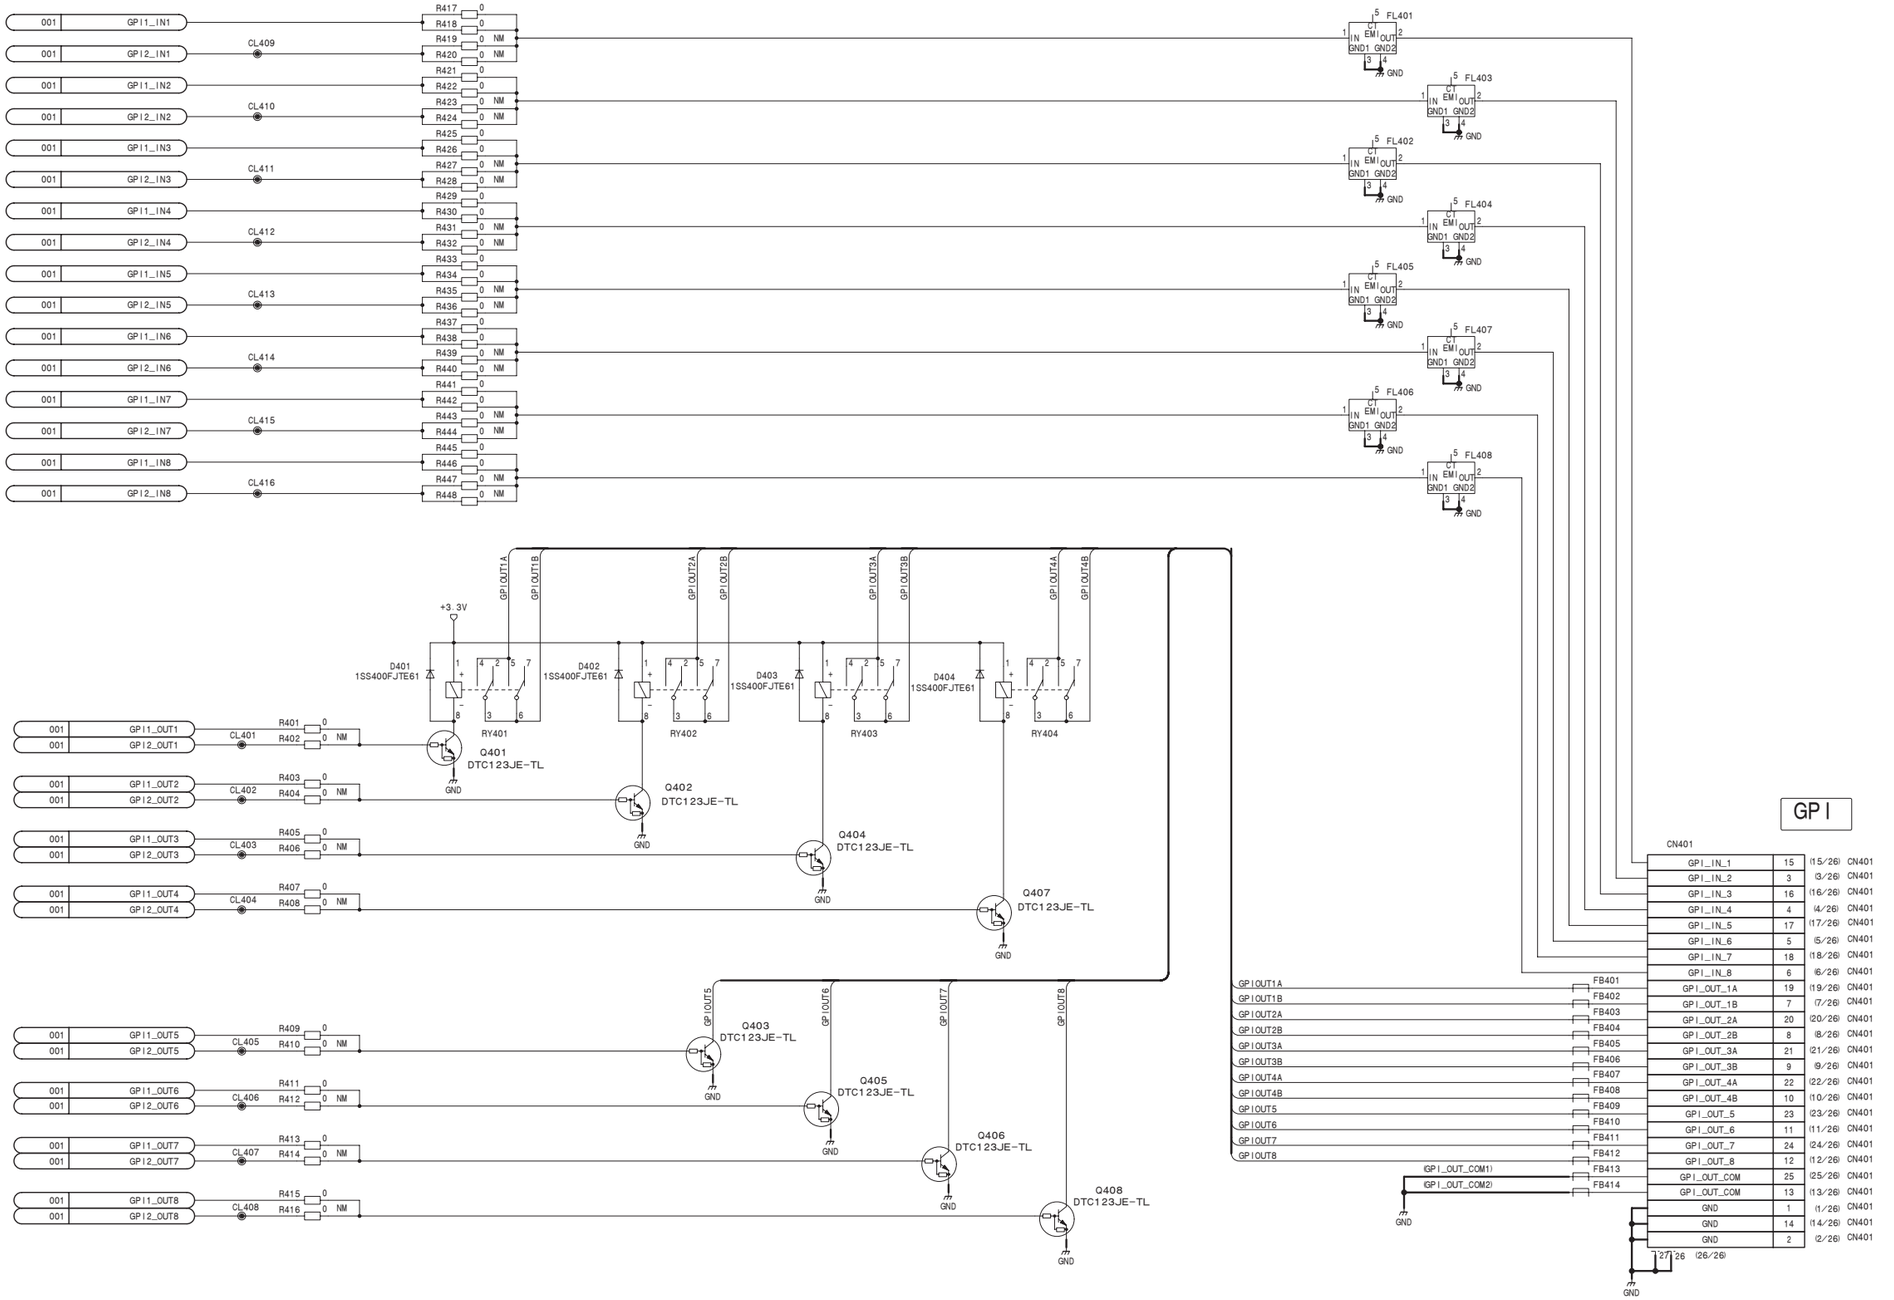

CN-3233 (4/4)

BOARD NO. 1-879-565-12

MVS-8000X_CN-3233_011_4

4-90

CN-3233A (1/4)

SUFFIX: -12

CN-3233A (1/4)

SUFFIX: -12

CNB1

10	+12V	+12V	+12V	+12V	+12V	+12V
9	+12V	+12V	+12V	+12V	+12V	+12V
8	+12V	+12V	+12V	+12V	+12V	+12V
7						
6	(DC_ENABLE0)	(DC_ENABLE1)	GND	(SD/HD0)	FUSE+12V	GND
5	(BD_EXT_F)	BD_EXT_R	GND	(SD/HD1)	(SD/HD2)	GND
4	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
3	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
1	(RESET_0L)	(RESET_1L)	GND	(RESET_2L)	(RESET_3L)	GND
	A	B	BG	C	D	DG

CNE1

10		TC_IN	GND		REF_IN0	GND
9	(REF_IN2)		GND	(REF_IN1)		GND
8	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
7	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
6	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
5	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
4			GND	EXTHUB1_INT		GND
3			GND			GND
2			GND			GND
1			GND			GND
	A	B	BG	C	D	DG

CNF1

10	GBE0_TRX2P	GBE0_TRX2N	GND	GBE0_TRX3P	GBE0_TRX3N	GND
9	GBE0_TRX0P	GBE0_TRX0N	GND	GBE0_TRX1P	GBE0_TRX1N	GND
8	GBE0_LED_L	GBE0_LED_R	GND	GBE1_LED_L	GBE1_LED_R	GND
7	GBE1_TRX2P	GBE1_TRX2N	GND	GBE1_TRX3P	GBE1_TRX3N	GND
6	GBE1_TRX0P	GBE1_TRX0N	GND	GBE1_TRX1P	GBE1_TRX1N	GND
5	GBE2_TRX2P	GBE2_TRX2N	GND	GBE2_TRX3P	GBE2_TRX3N	GND
4	GBE2_TRX0P	GBE2_TRX0N	GND	GBE2_TRX1P	GBE2_TRX1N	GND
3	GBE2_LED_L	GBE2_LED_R	GND	GBE3_LED_L	GBE3_LED_R	GND
2	GBE3_TRX2P	GBE3_TRX2N	GND	GBE3_TRX3P	GBE3_TRX3N	GND
1	GBE3_TRX0P	GBE3_TRX0N	GND	GBE3_TRX1P	GBE3_TRX1N	GND
	A	B	BG	C	D	DG

(No Mount @CN-3234)

CNM1

10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
6	GPI2_OUT1	GPI2_IN1	GND	GPI1_OUT1	GPI1_IN1	GND
5	GPI2_OUT2	GPI2_IN2	GND	GPI1_OUT2	GPI1_IN2	GND
4	GPI2_OUT3	GPI2_IN3	GND	GPI1_OUT3	GPI1_IN3	GND
3	GPI2_OUT4	GPI2_IN4	GND	GPI1_OUT4	GPI1_IN4	GND
2	GPI2_OUT5	GPI2_IN5	GND	GPI1_OUT5	GPI1_IN5	GND
1	GPI2_OUT6	GPI2_IN6	GND	GPI1_OUT6	GPI1_IN6	GND
	A	B	BG	C	D	DG

CNN1

10	GPI2_OUT7	GPI2_IN7	GND	GPI1_OUT7	GPI1_IN7	GND
9	GPI2_OUT8	GPI2_IN8	GND	GPI1_OUT8	GPI1_IN8	GND
8			GND			GND
7			GND			GND
6			GND			GND
5			GND			GND
4			GND			GND
3			GND			GND
2			GND			GND
1			GND			GND
	A	B	BG	C	D	DG

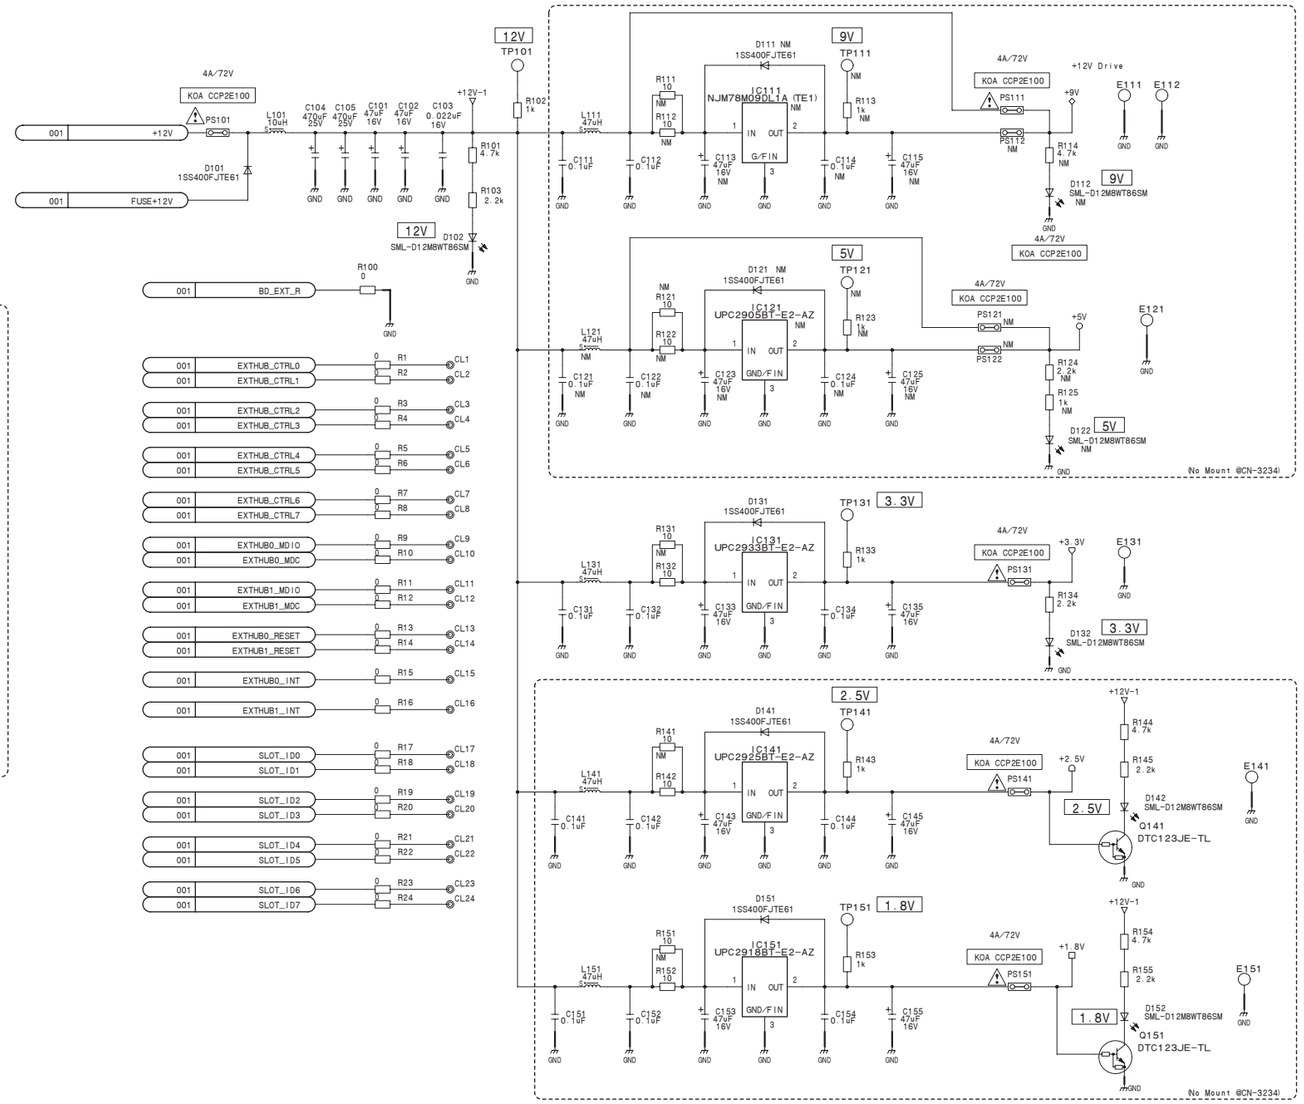

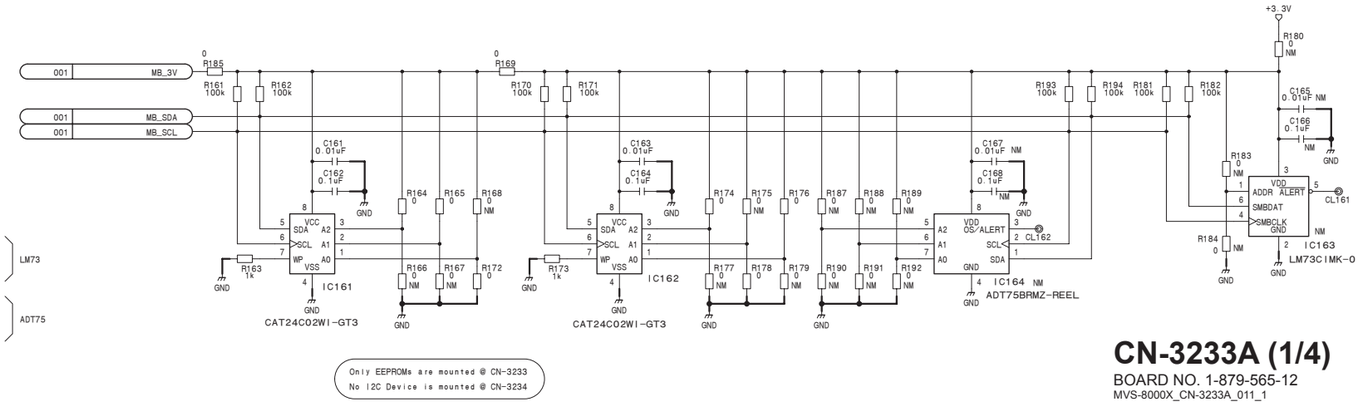

EEPROM Addr

A2	A1	A0	Board	Ref	
0	0	0	CA-82	CPU-DP	YES
0	0	1	CA-82	CPU-DP	YES
0	1	0	CN-3234	IC161	NO
0	1	1	CN-3234	IC162	NO
1	0	0	CA-82	IC3903	YES
1	0	1	CN-3233	IC162	YES
1	1	0	CN-3233	IC161	YES
1	1	1	CA-82	SG	YES

Temp. Sensor

Device Addr	Board	Ref	Mount	
1001 000	CN-3234	IC163	NO	LM73
1001 001	CA-82	IC3904	NO	
1001 010	CN-3233	IC163	NO	
1001 011				
1001 100	CA-82	IC3904	YES	ADT75
1001 101	CN-3233	IC164	NO	
1001 110	CN-3234	IC164	NO	
1001 111				

Only EEPROMs are mounted @ CN-3233
No I2C Device is mounted @ CN-3234

CN-3233A (1/4)

BOARD NO. 1-879-565-12

MVS-8000X_CN-3233A_011_1

CN-3233A (2/4)
SUFFIX: -12

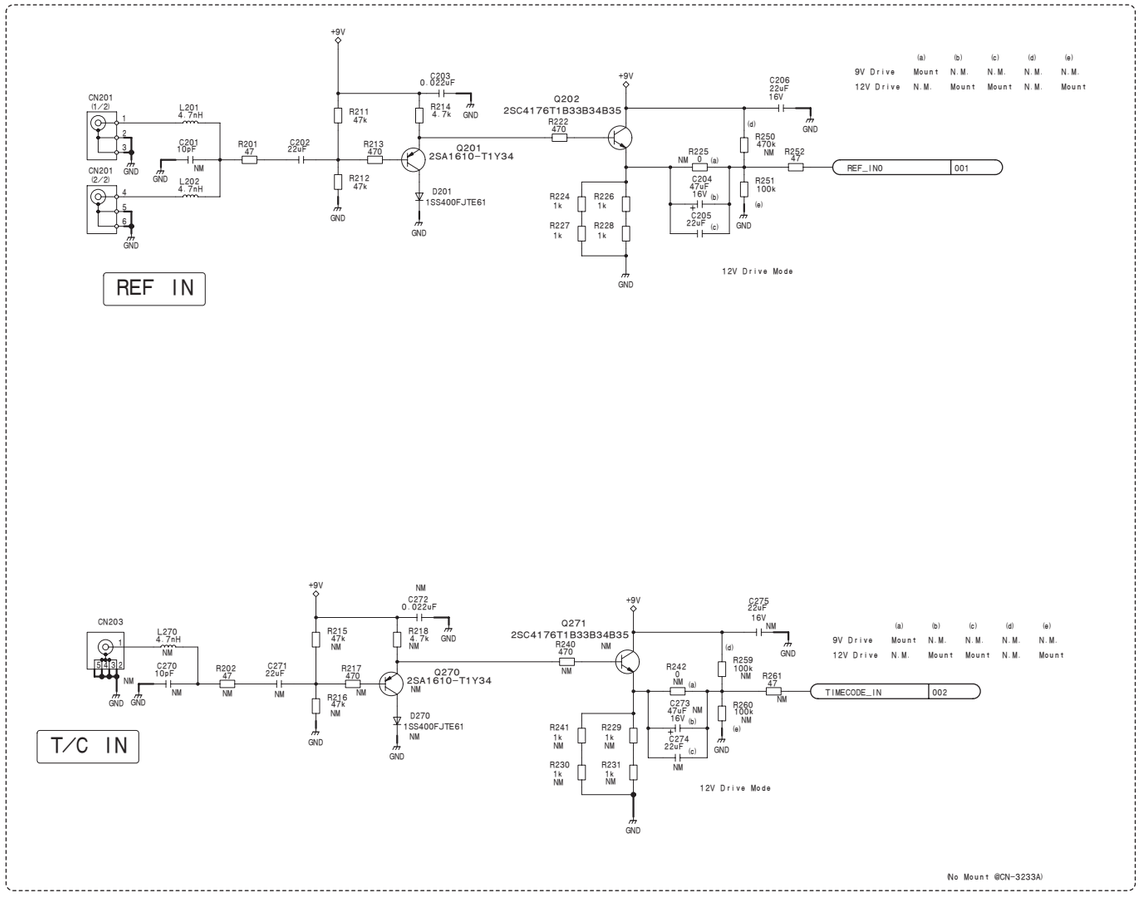

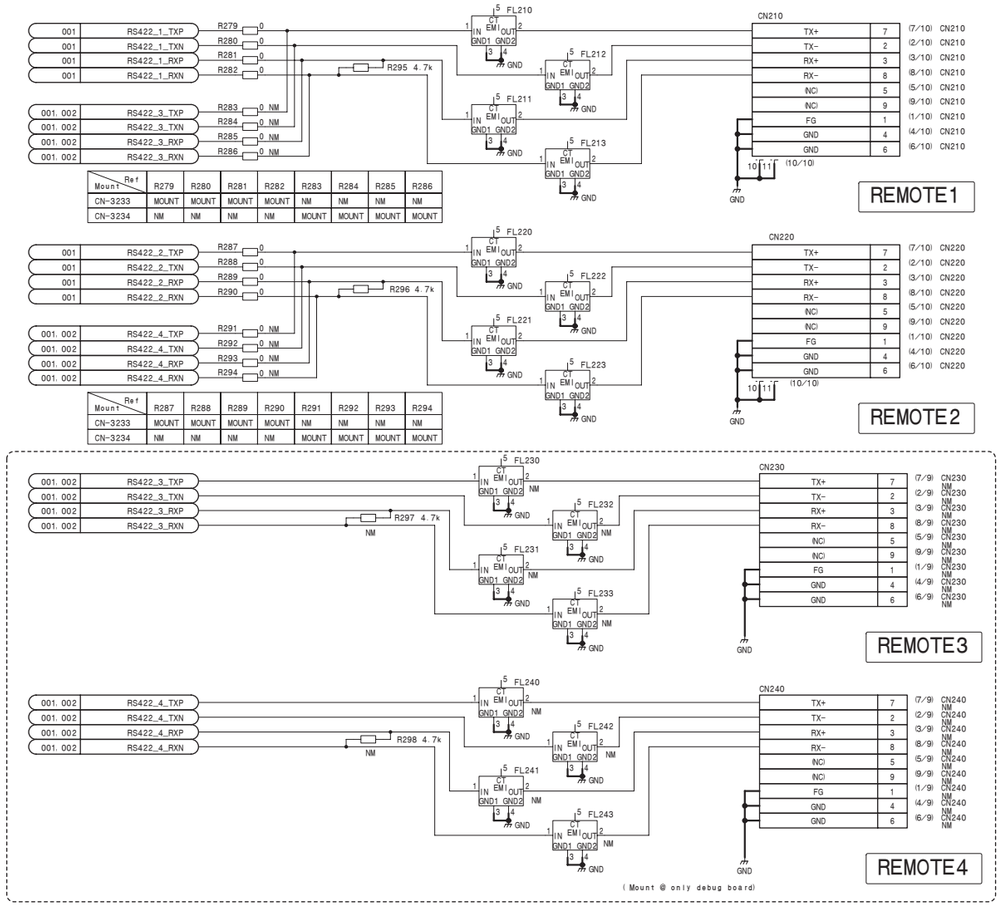

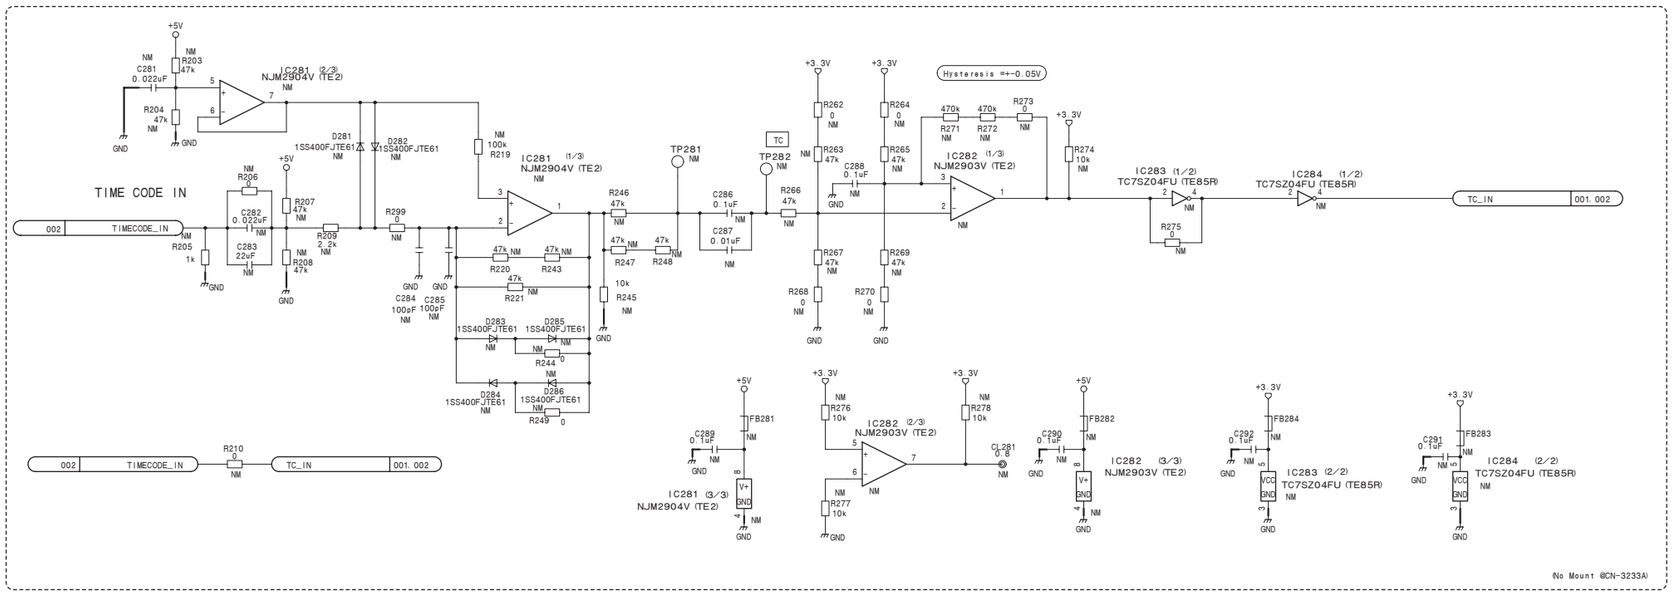

CN-3233A (2/4)
BOARD NO. 1-879-565-12
MVS-8000X_CN-3233A_011_2

CN-3233A (3/4)
SUFFIX: -12

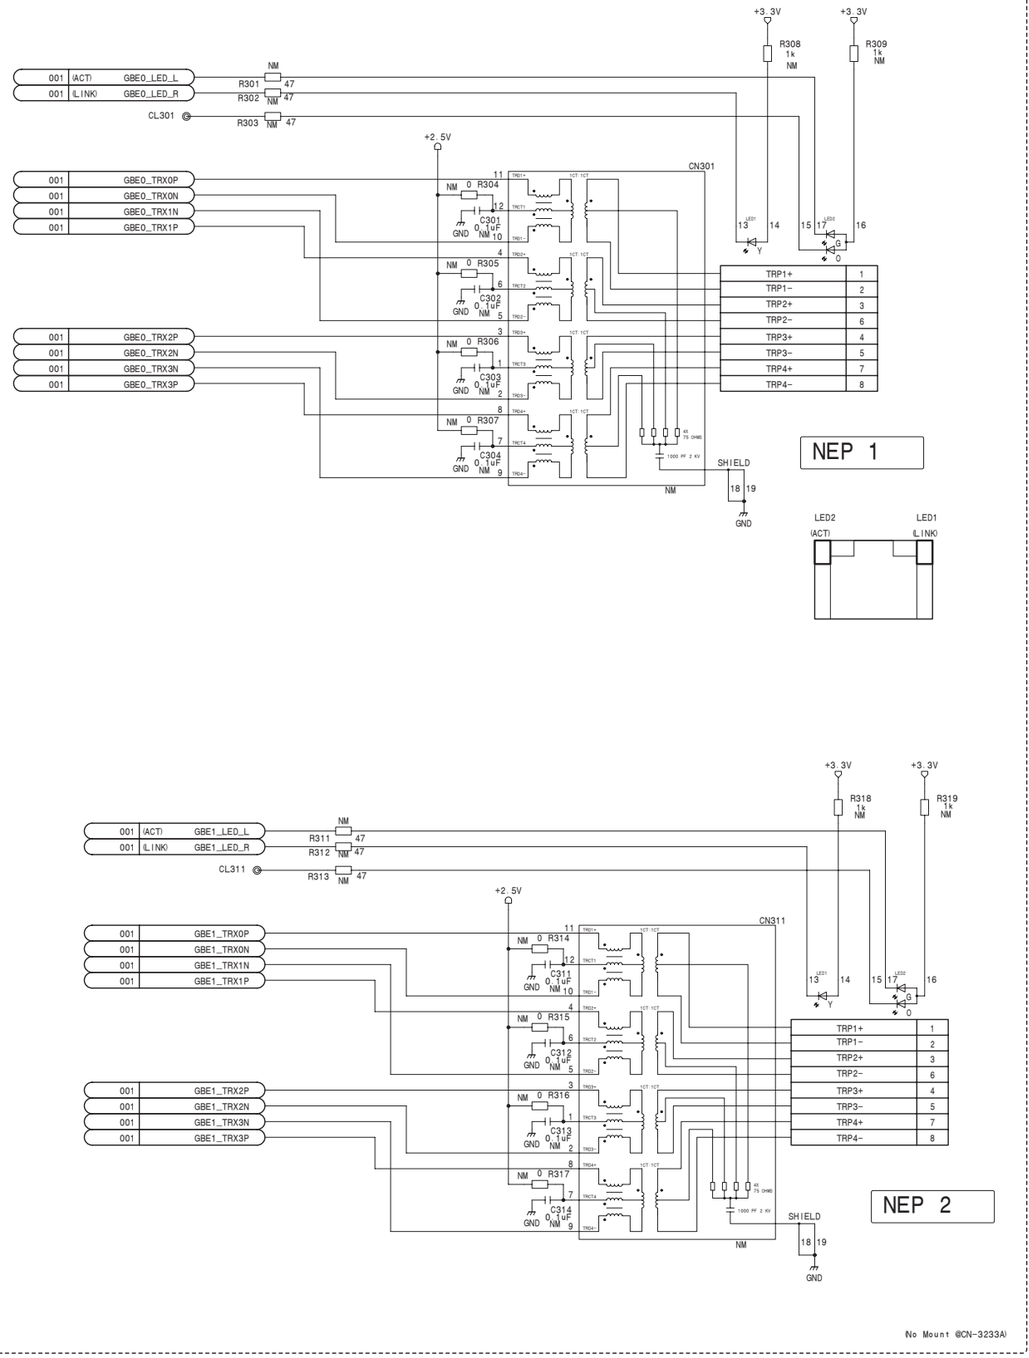

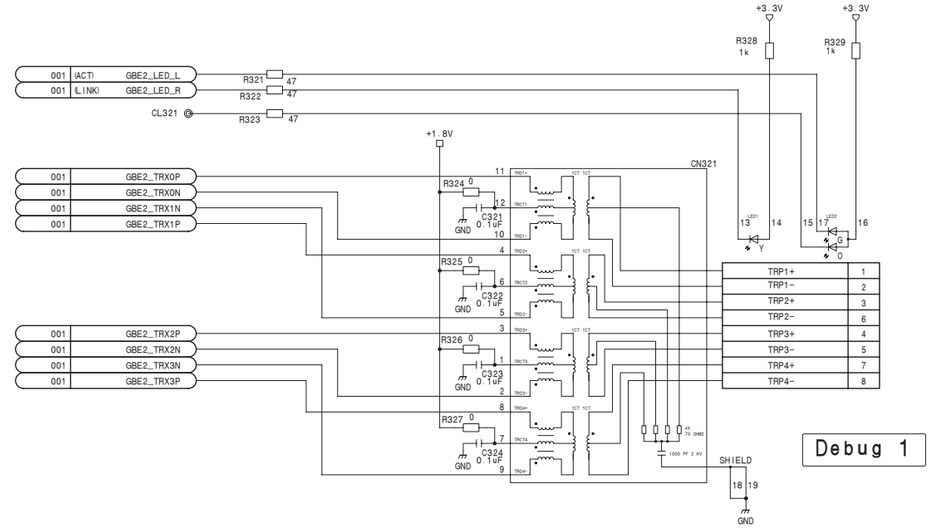

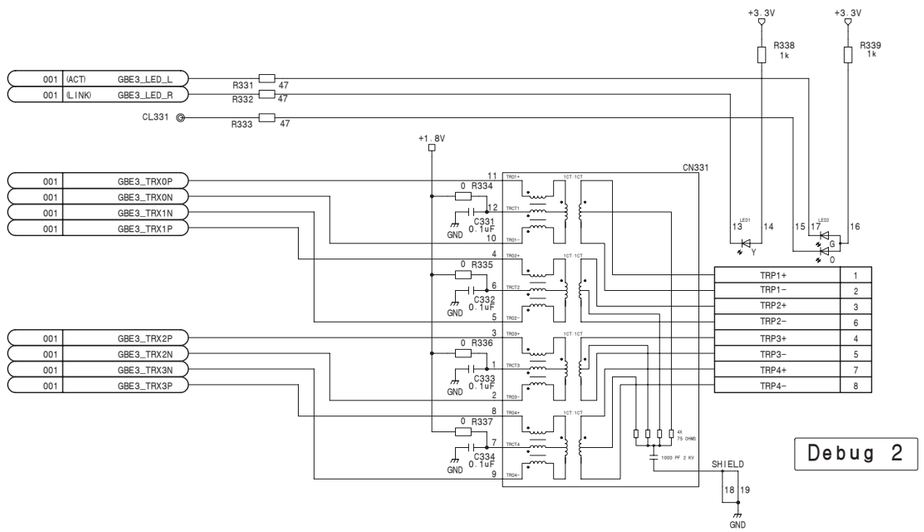

CN-3233A (3/4)
BOARD NO. 1-879-565-12
MVS-8000X_CN-3233A_011_3

CN-3233A (4/4) **SUFFIX: -12**

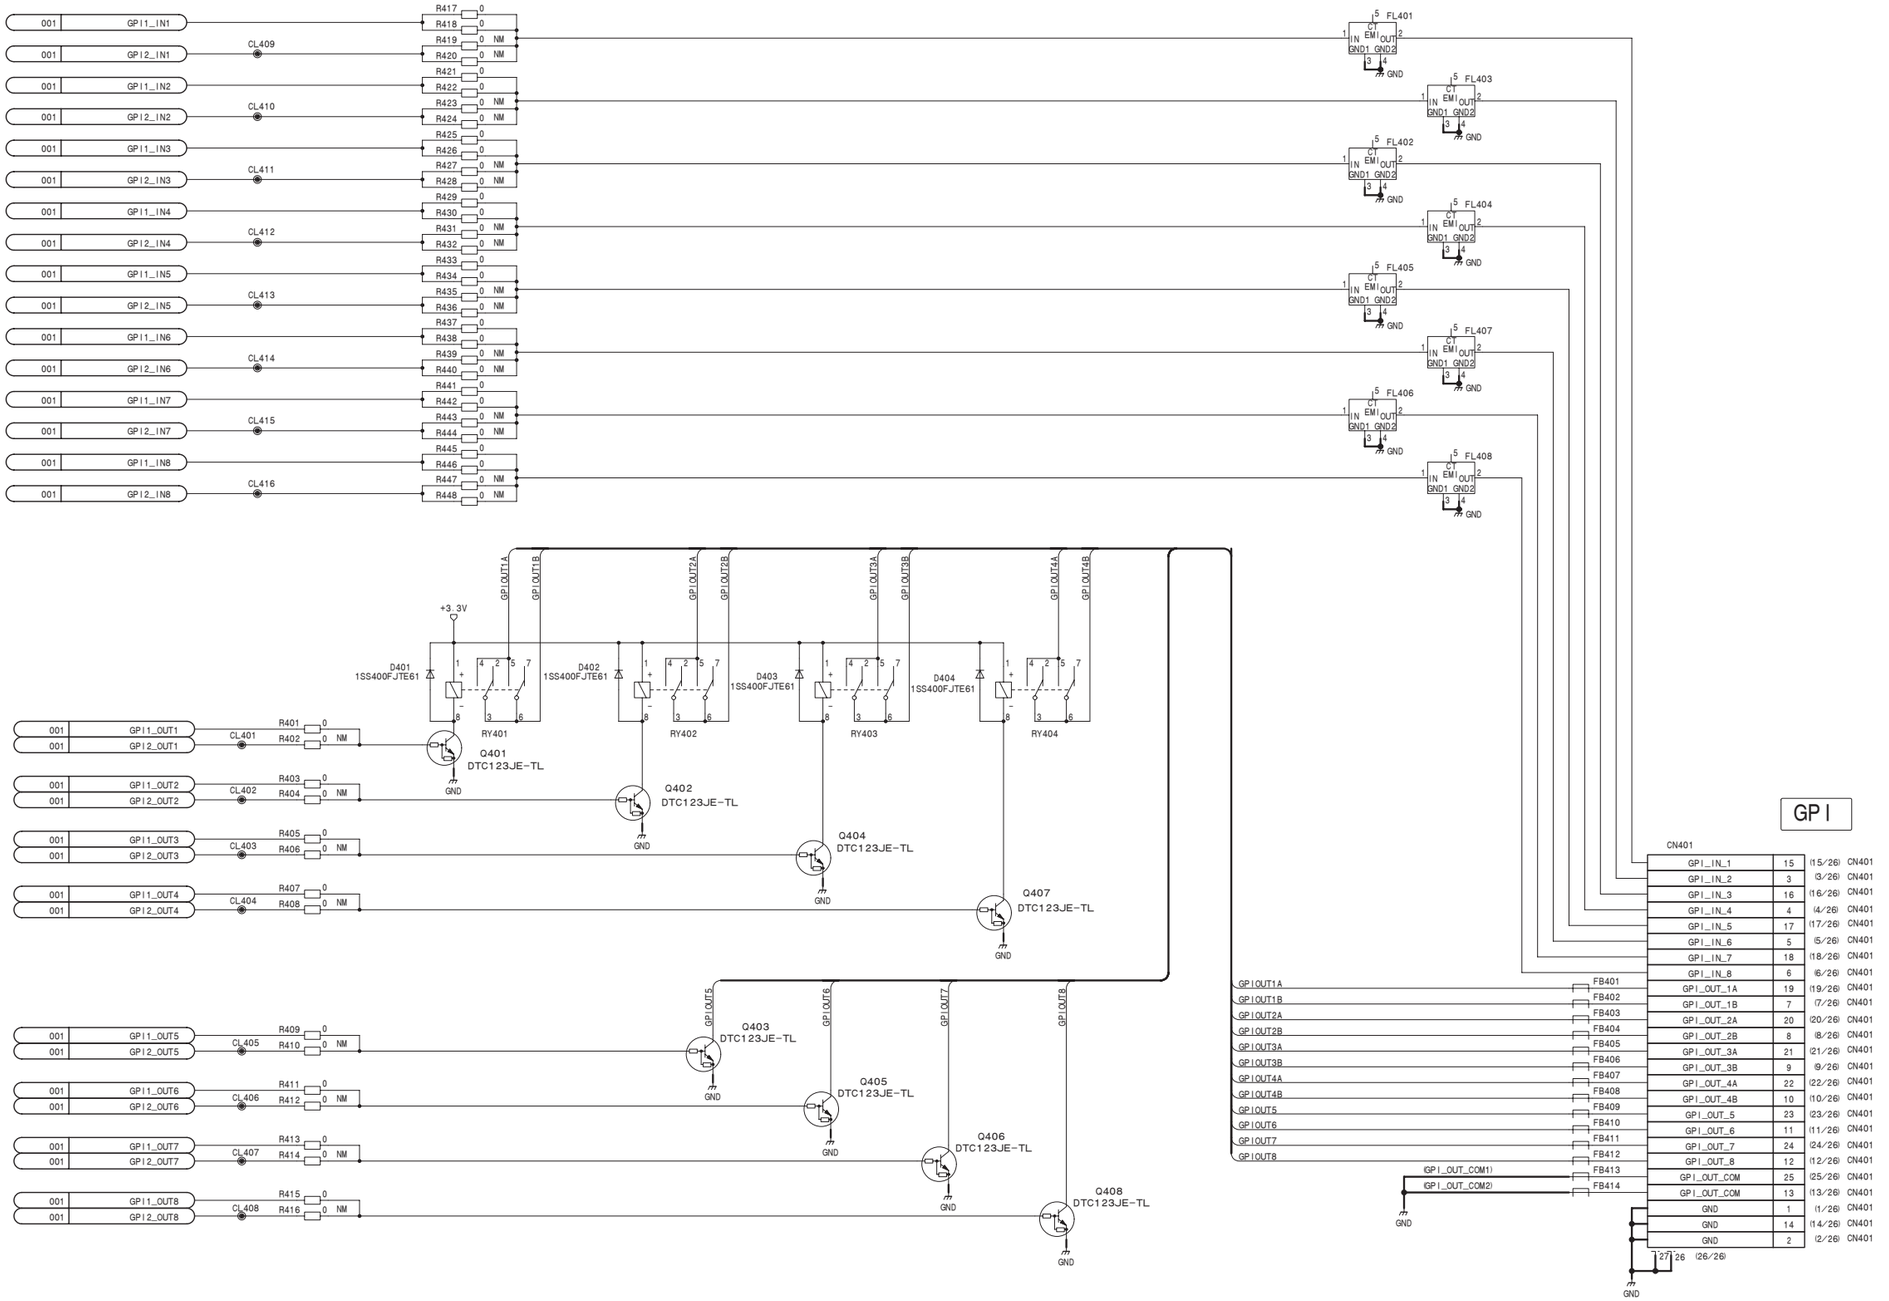

CN-3233A (4/4)

BOARD NO. 1-879-565-12

MVS-8000X_CN-3233A_011_4

CN-3234 (1/4)

SUFFIX: -11

CN-3234 (1/4)

SUFFIX: -11

CNB1

10	+12V	+12V	+12V	+12V	+12V	+12V
9	+12V	+12V	+12V	+12V	+12V	+12V
8	+12V	+12V	+12V	+12V	+12V	+12V
7						
6	IDC_ENABLE0)	IDC_ENABLE1)	GND	(SD/HD0)	FUSE+12V	GND
5	BD_EXT_F)	BD_EXT_R	GND	(SD/HD1)	(SD/HD2)	GND
4	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
3	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
1	(RESET_0L)	(RESET_1L)	GND	(RESET_2L)	(RESET_3L)	GND
	A	B	BG	C	D	DG

CNE1 NM

10		TC_IN	GND		REF_IN0	GND
9	(REF_IN2)		GND	(REF_IN1)		GND
8	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
7	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
6	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
5	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
4			GND	EXTHUB1_INT		GND
3			GND			GND
2			GND			GND
1			GND			GND
	A	B	BG	C	D	DG

CNF1 NM

10	GBE0_TRX2P	GBE0_TRX2N	GND	GBE0_TRX3P	GBE0_TRX3N	GND
9	GBE0_TRX0P	GBE0_TRX0N	GND	GBE0_TRX1P	GBE0_TRX1N	GND
8	GBE0_LED_L	GBE0_LED_R	GND	GBE1_LED_L	GBE1_LED_R	GND
7	GBE1_TRX2P	GBE1_TRX2N	GND	GBE1_TRX3P	GBE1_TRX3N	GND
6	GBE1_TRX0P	GBE1_TRX0N	GND	GBE1_TRX1P	GBE1_TRX1N	GND
5	GBE2_TRX2P	GBE2_TRX2N	GND	GBE2_TRX3P	GBE2_TRX3N	GND
4	GBE2_TRX0P	GBE2_TRX0N	GND	GBE2_TRX1P	GBE2_TRX1N	GND
3	GBE2_LED_L	GBE2_LED_R	GND	GBE3_LED_L	GBE3_LED_R	GND
2	GBE3_TRX2P	GBE3_TRX2N	GND	GBE3_TRX3P	GBE3_TRX3N	GND
1	GBE3_TRX0P	GBE3_TRX0N	GND	GBE3_TRX1P	GBE3_TRX1N	GND
	A	B	BG	C	D	DG

No Mount @CN-3234)

CNM1

10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
6	GPI2_OUT1	GPI2_IN1	GND	GPI1_OUT1	GPI1_IN1	GND
5	GPI2_OUT2	GPI2_IN2	GND	GPI1_OUT2	GPI1_IN2	GND
4	GPI2_OUT3	GPI2_IN3	GND	GPI1_OUT3	GPI1_IN3	GND
3	GPI2_OUT4	GPI2_IN4	GND	GPI1_OUT4	GPI1_IN4	GND
2	GPI2_OUT5	GPI2_IN5	GND	GPI1_OUT5	GPI1_IN5	GND
1	GPI2_OUT6	GPI2_IN6	GND	GPI1_OUT6	GPI1_IN6	GND
	A	B	BG	C	D	DG

CNN1

10	GPI2_OUT7	GPI2_IN7	GND	GPI1_OUT7	GPI1_IN7	GND
9	GPI2_OUT8	GPI2_IN8	GND	GPI1_OUT8	GPI1_IN8	GND
8			GND			GND
7			GND			GND
6			GND			GND
5			GND			GND
4			GND			GND
3			GND			GND
2			GND			GND
1			GND			GND
	A	B	BG	C	D	DG

EEPROM Addr				
A2 A1 A0	Board	Ref	Mount	
0 0 0	CA-82	CPU-DP	YES	
0 0 1	CA-82	CPU-DP	YES	
0 1 0	CN-3233A	IC161	NO	
0 1 1	CN-3233A	IC162	NO	
1 0 0	CA-82	IC3903	YES	
1 0 1	CN-3233	IC162	YES	
1 1 0	CN-3233	IC161	YES	
1 1 1	CA-82	SG	YES	

Temp. Sensor				
Device Addr	Board	Ref	Mount	
1001 000	CN-3233A	IC163	NO	LM73
1001 001	CA-82	IC3904	NO	
1001 010	CN-3233	IC163	NO	
1001 011				
1001 100	CA-82	IC3904	YES	
1001 101	CN-3233	IC164	NO	ADT75
1001 110	CN-3233A	IC164	NO	
1001 111				

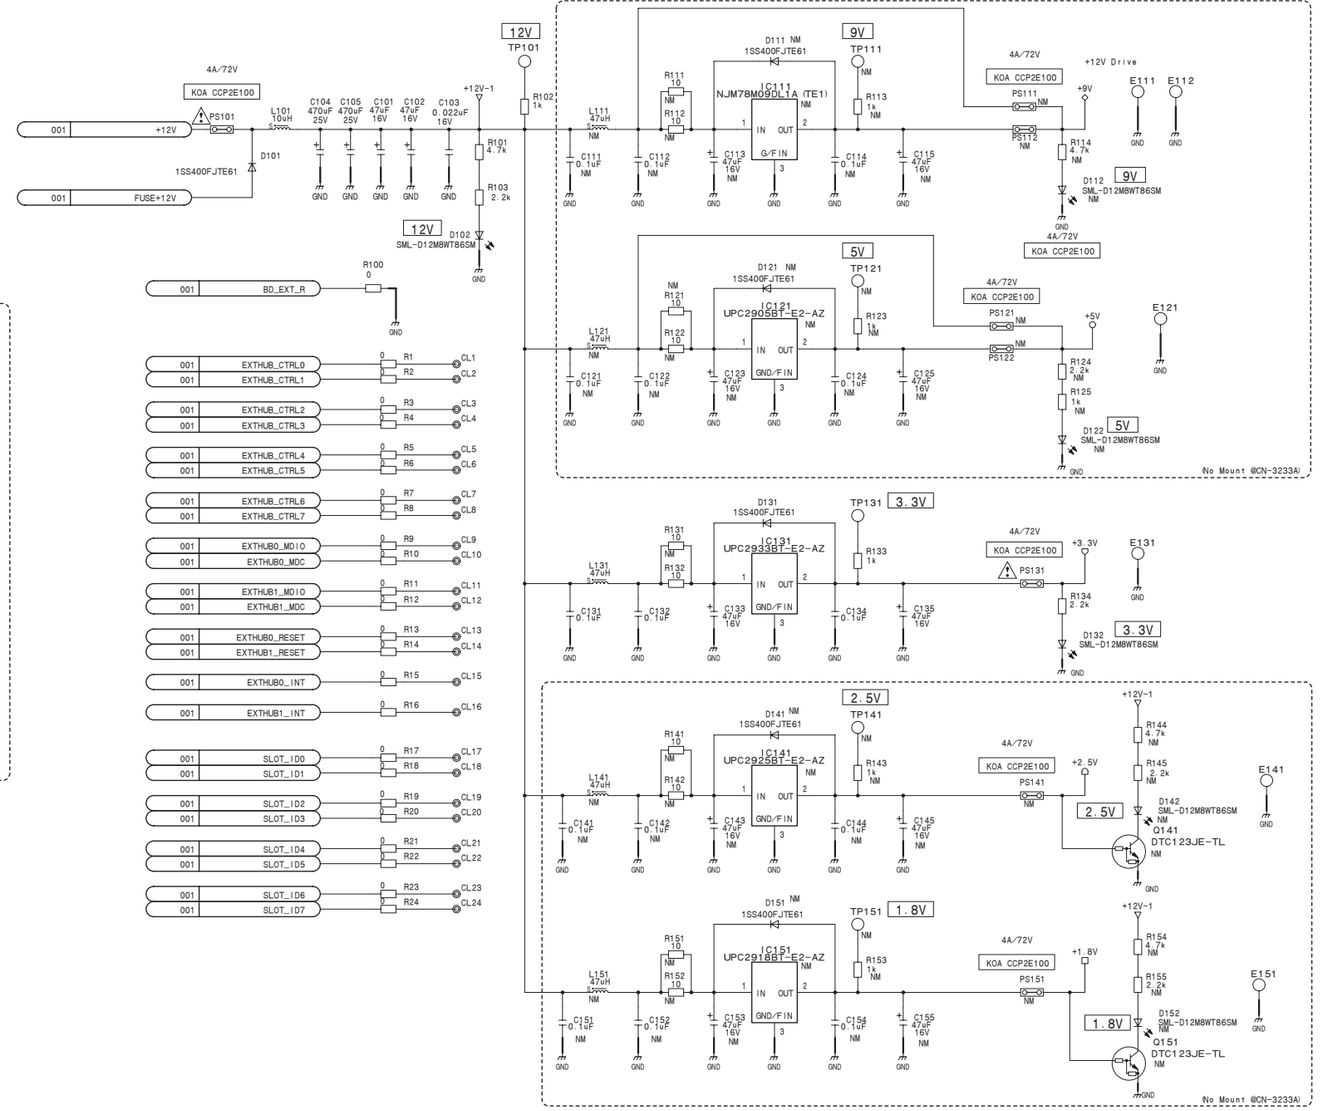

CN-3234 (1/4)

BOARD NO. 1-879-566-11

MVS-8000X_CN-3234_011_1

CN-3234 (2/4)
SUFFIX: -11

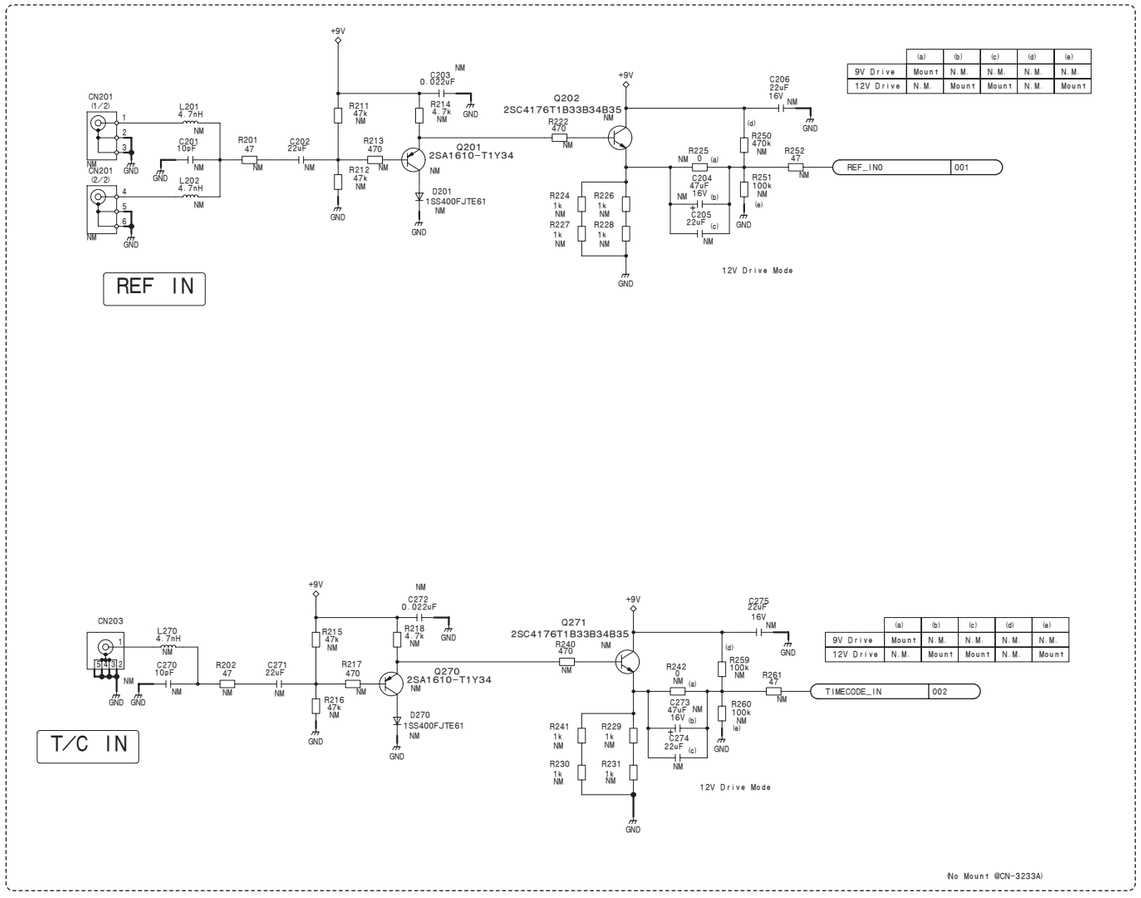

4-96

CN-3234 (2/4)
BOARD NO. 1-879-566-11
MVS-8000X_CN-3234_011_2

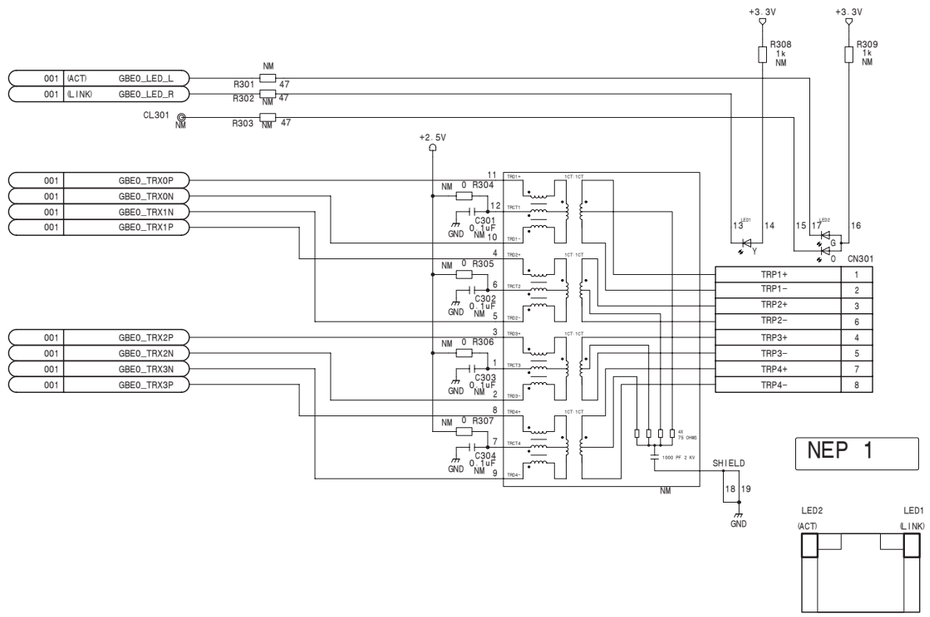

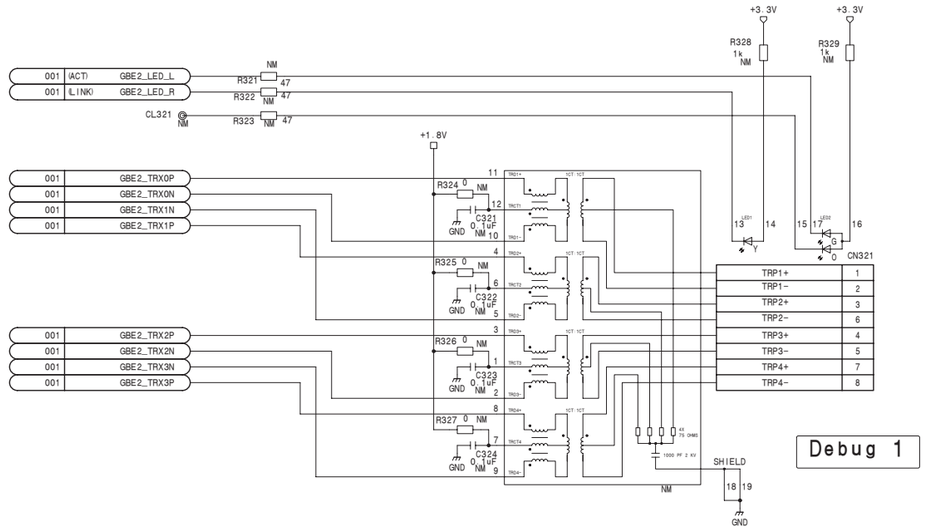

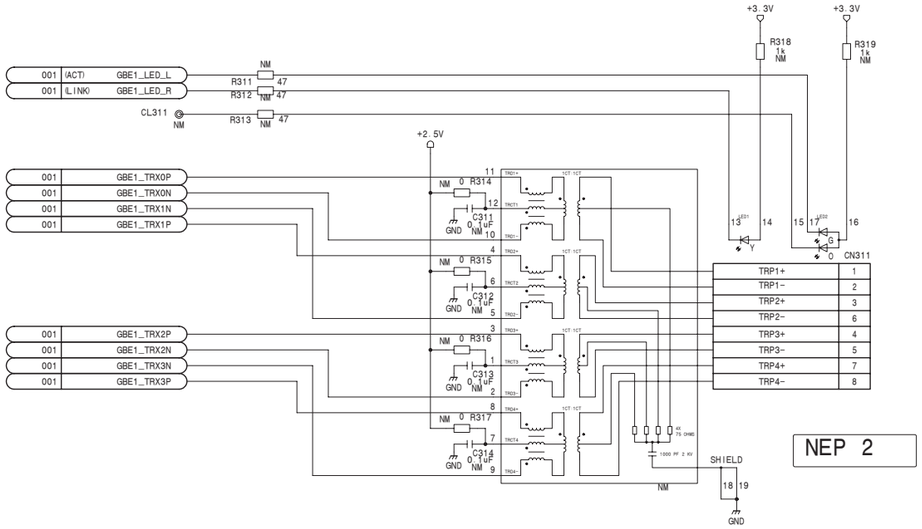

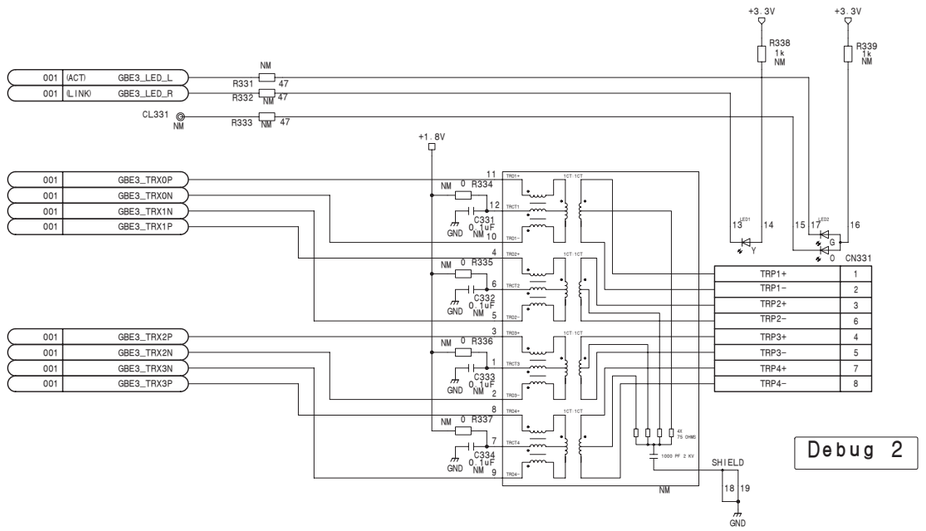

No Mount @CN-3233A)

CN-3234 (3/4)
BOARD NO. 1-879-566-11
MVS-8000X_CN-3234_011_3

CN-3234 (4/4) **SUFFIX: -11**

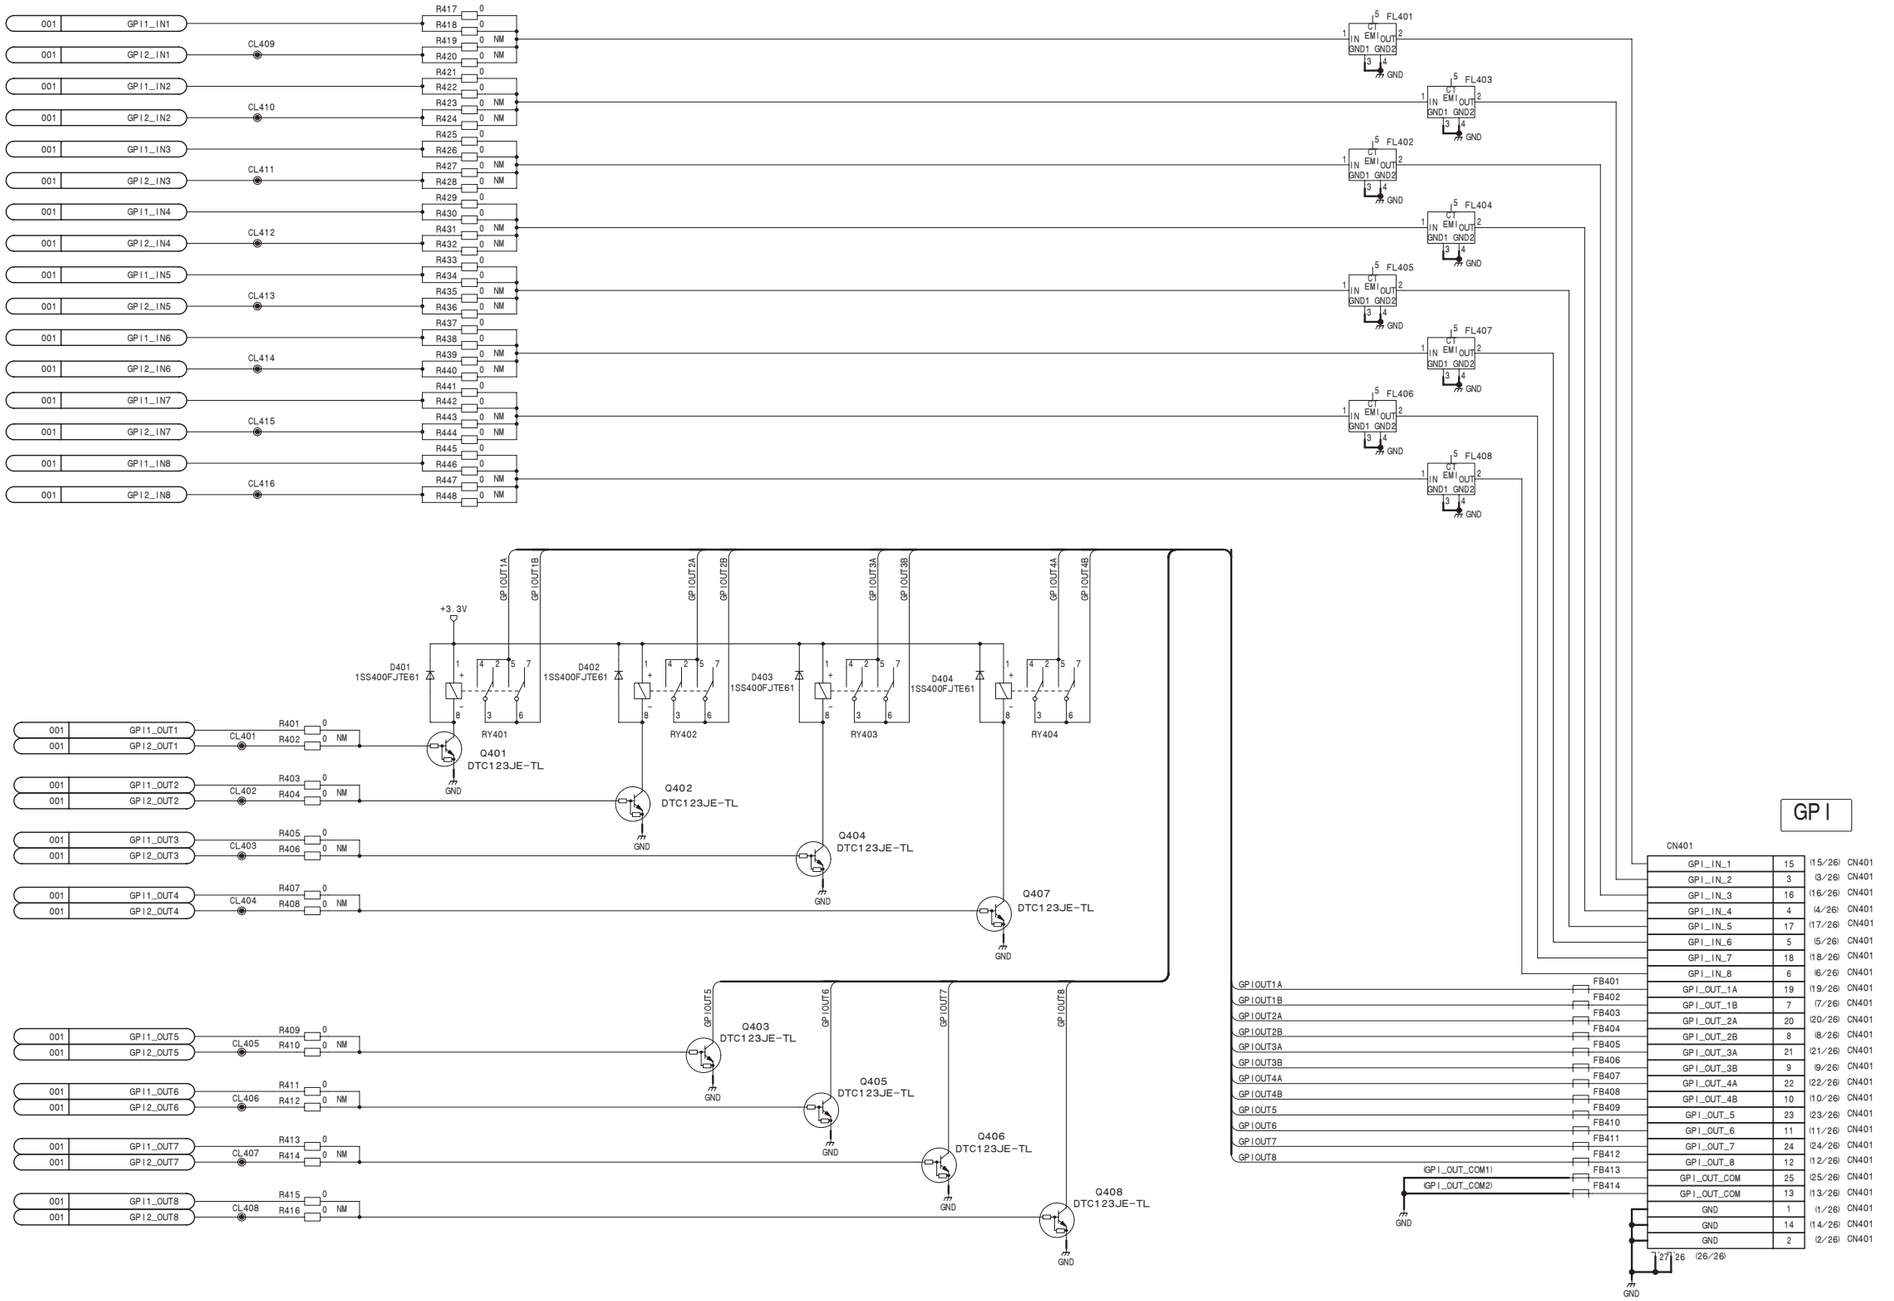

CN-3234 (4/4)

BOARD NO. 1-879-566-11

MVS-8000X_CN-3234_011_4

CNI-37 (1/10)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1	IN01BP	IN01BN	GND	IN01AP	IN01AN	GND
2	IN02BP	IN02BN	GND	IN02AP	IN02AN	GND
3	IN03BP	IN03BN	GND	IN03AP	IN03AN	GND
4	IN04BP	IN04BN	GND	IN04AP	IN04AN	GND
5	IN05BP	IN05BN	GND	IN05AP	IN05AN	GND
6	IN06BP	IN06BN	GND	IN06AP	IN06AN	GND
7	IN07BP	IN07BN	GND	IN07AP	IN07AN	GND
8	IN08BP	IN08BN	GND	IN08AP	IN08AN	GND
9	IN09BP	IN09BN	GND	IN09AP	IN09AN	GND
10	IN10BP	IN10BN	GND	IN10AP	IN10AN	GND

CNF1

	A	B	BG	C	D	DG
1	IN11BP	IN11BN	GND	IN11AP	IN11AN	GND
2	IN12BP	IN12BN	GND	IN12AP	IN12AN	GND
3	IN13BP	IN13BN	GND	IN13AP	IN13AN	GND
4	IN14BP	IN14BN	GND	IN14AP	IN14AN	GND
5	IN15BP	IN15BN	GND	IN15AP	IN15AN	GND
6	IN16BP	IN16BN	GND	IN16AP	IN16AN	GND
7	IN17BP	IN17BN	GND	IN17AP	IN17AN	GND
8	IN18BP	IN18BN	GND	IN18AP	IN18AN	GND
9	IN19BP	IN19BN	GND	IN19AP	IN19AN	GND
10	IN20BP	IN20BN	GND	IN20AP	IN20AN	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	SLOT_No4	SLOT_No5	GND	SLOT_No6	SLOT_No7	GND
4	SLOT_No0	SLOT_No1	GND	SLOT_No2	SLOT_No3	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	I2C_SCL	I2C_SDA	GND
6	RESET	(DC_ENBL)	GND	X/XSF	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNI-37 (1/10)

BOARD NO. 1-879-572-11

MVS-8000X_CNI-37_003_1

CNI-37 (2/10)
SUFFIX: -11

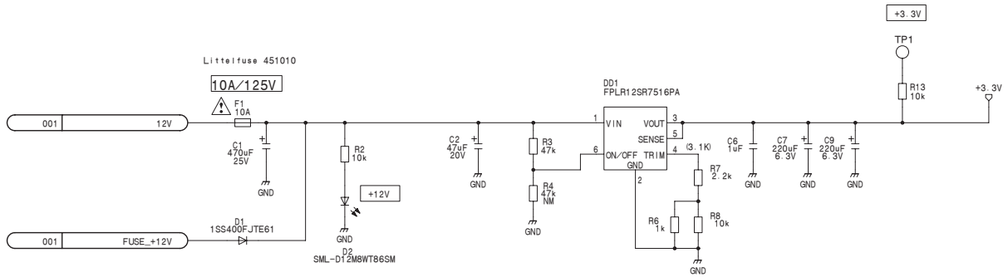



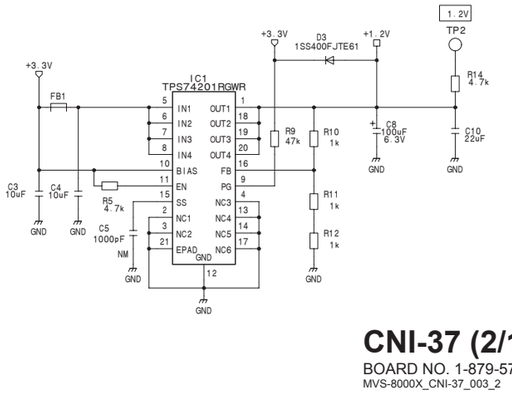



CNI-37 (2/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_2

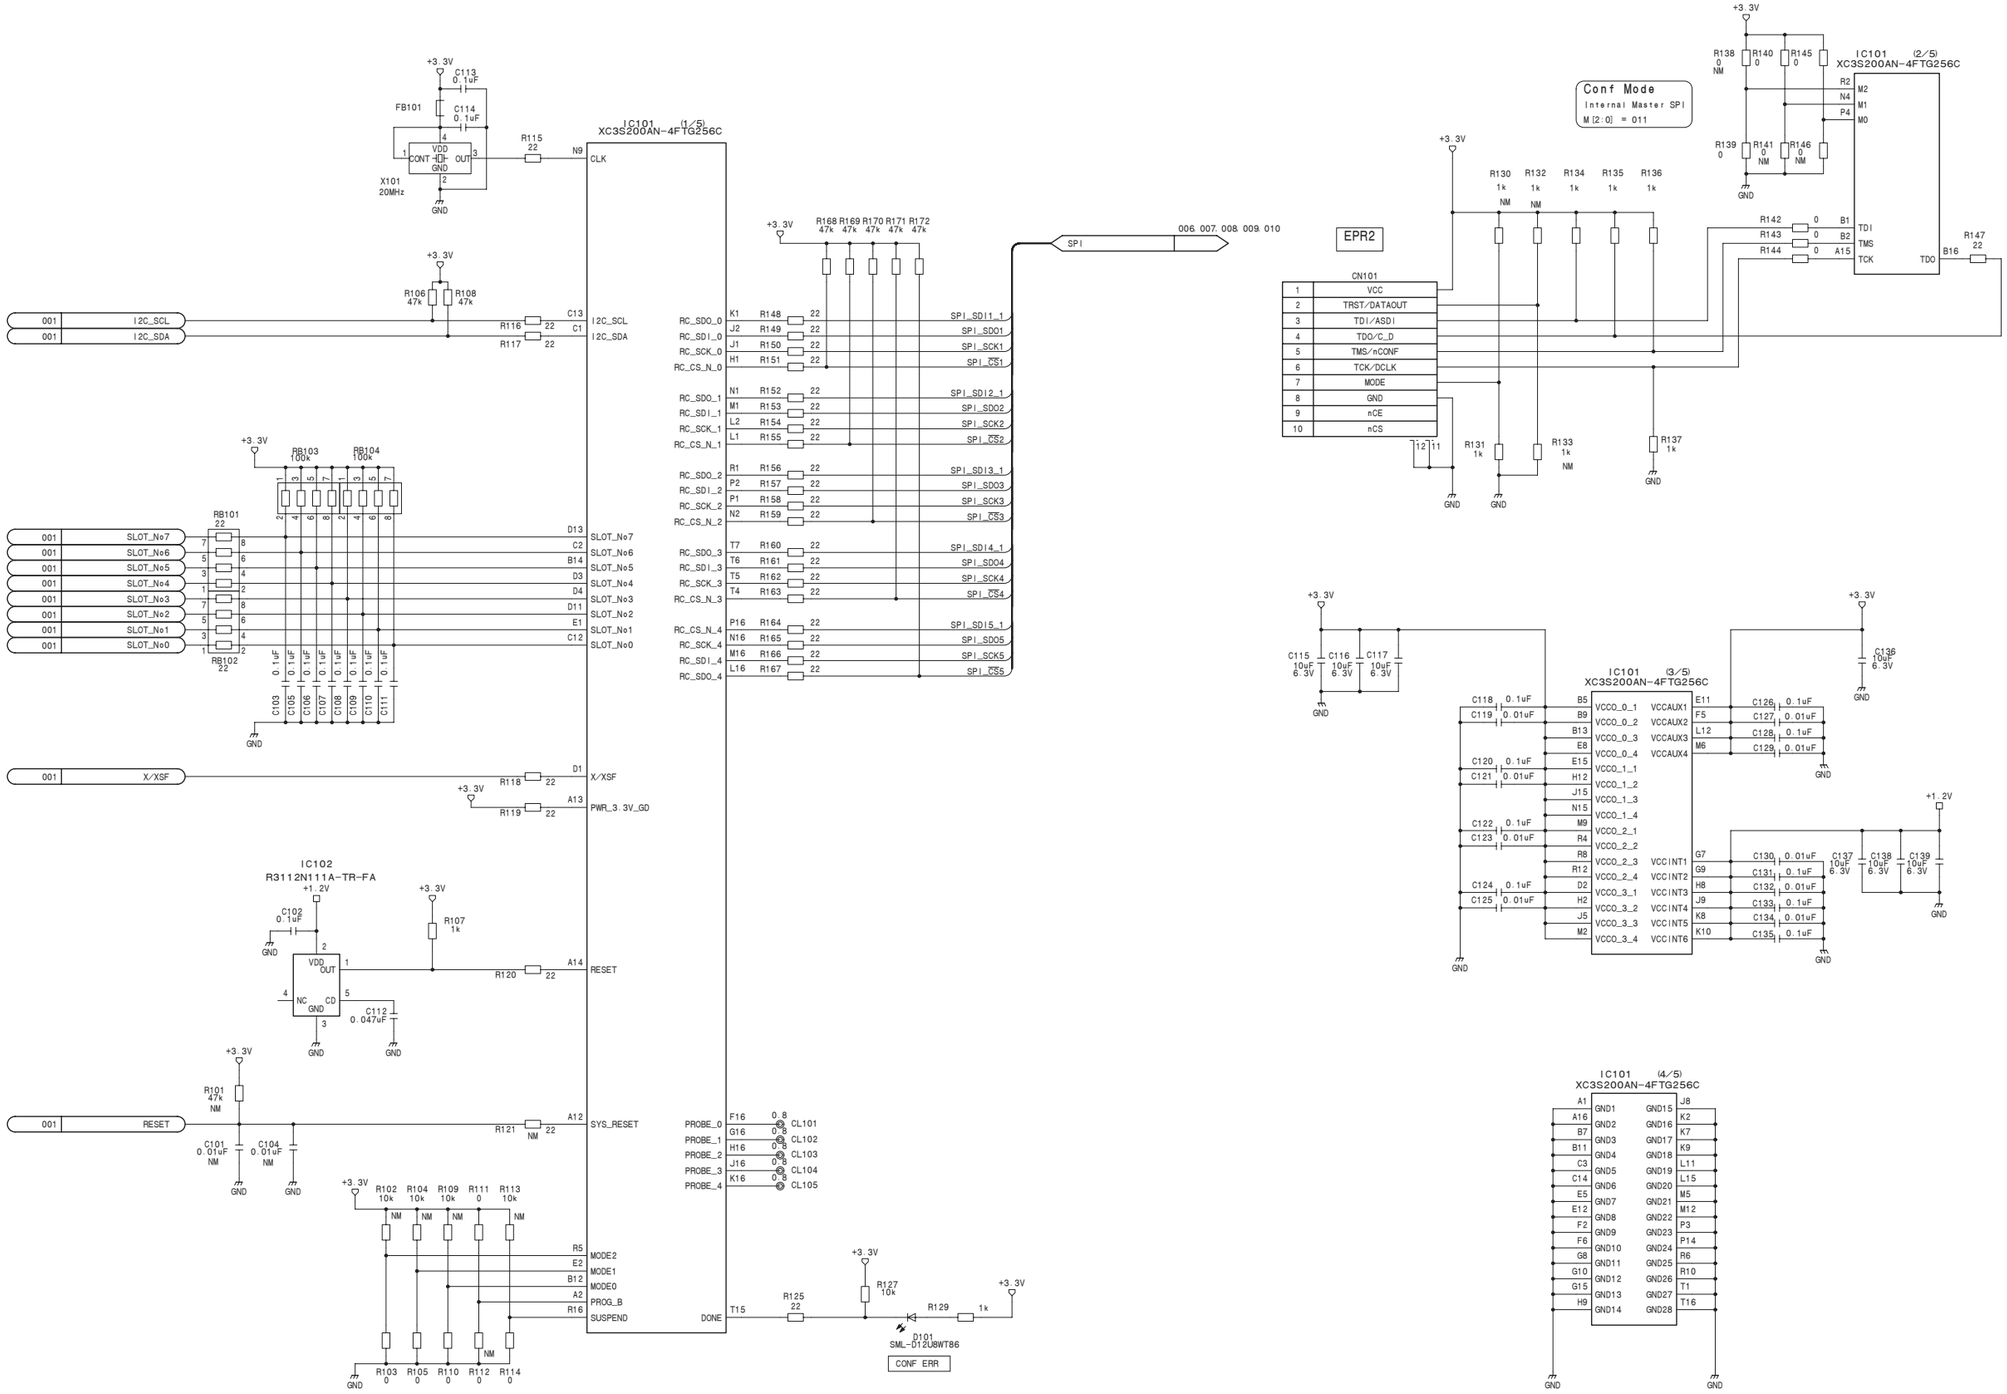

CNI-37 (3/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_3

CNI-37 (4/10)
SUFFIX: -11

CNI-37 (4/10)
SUFFIX: -11

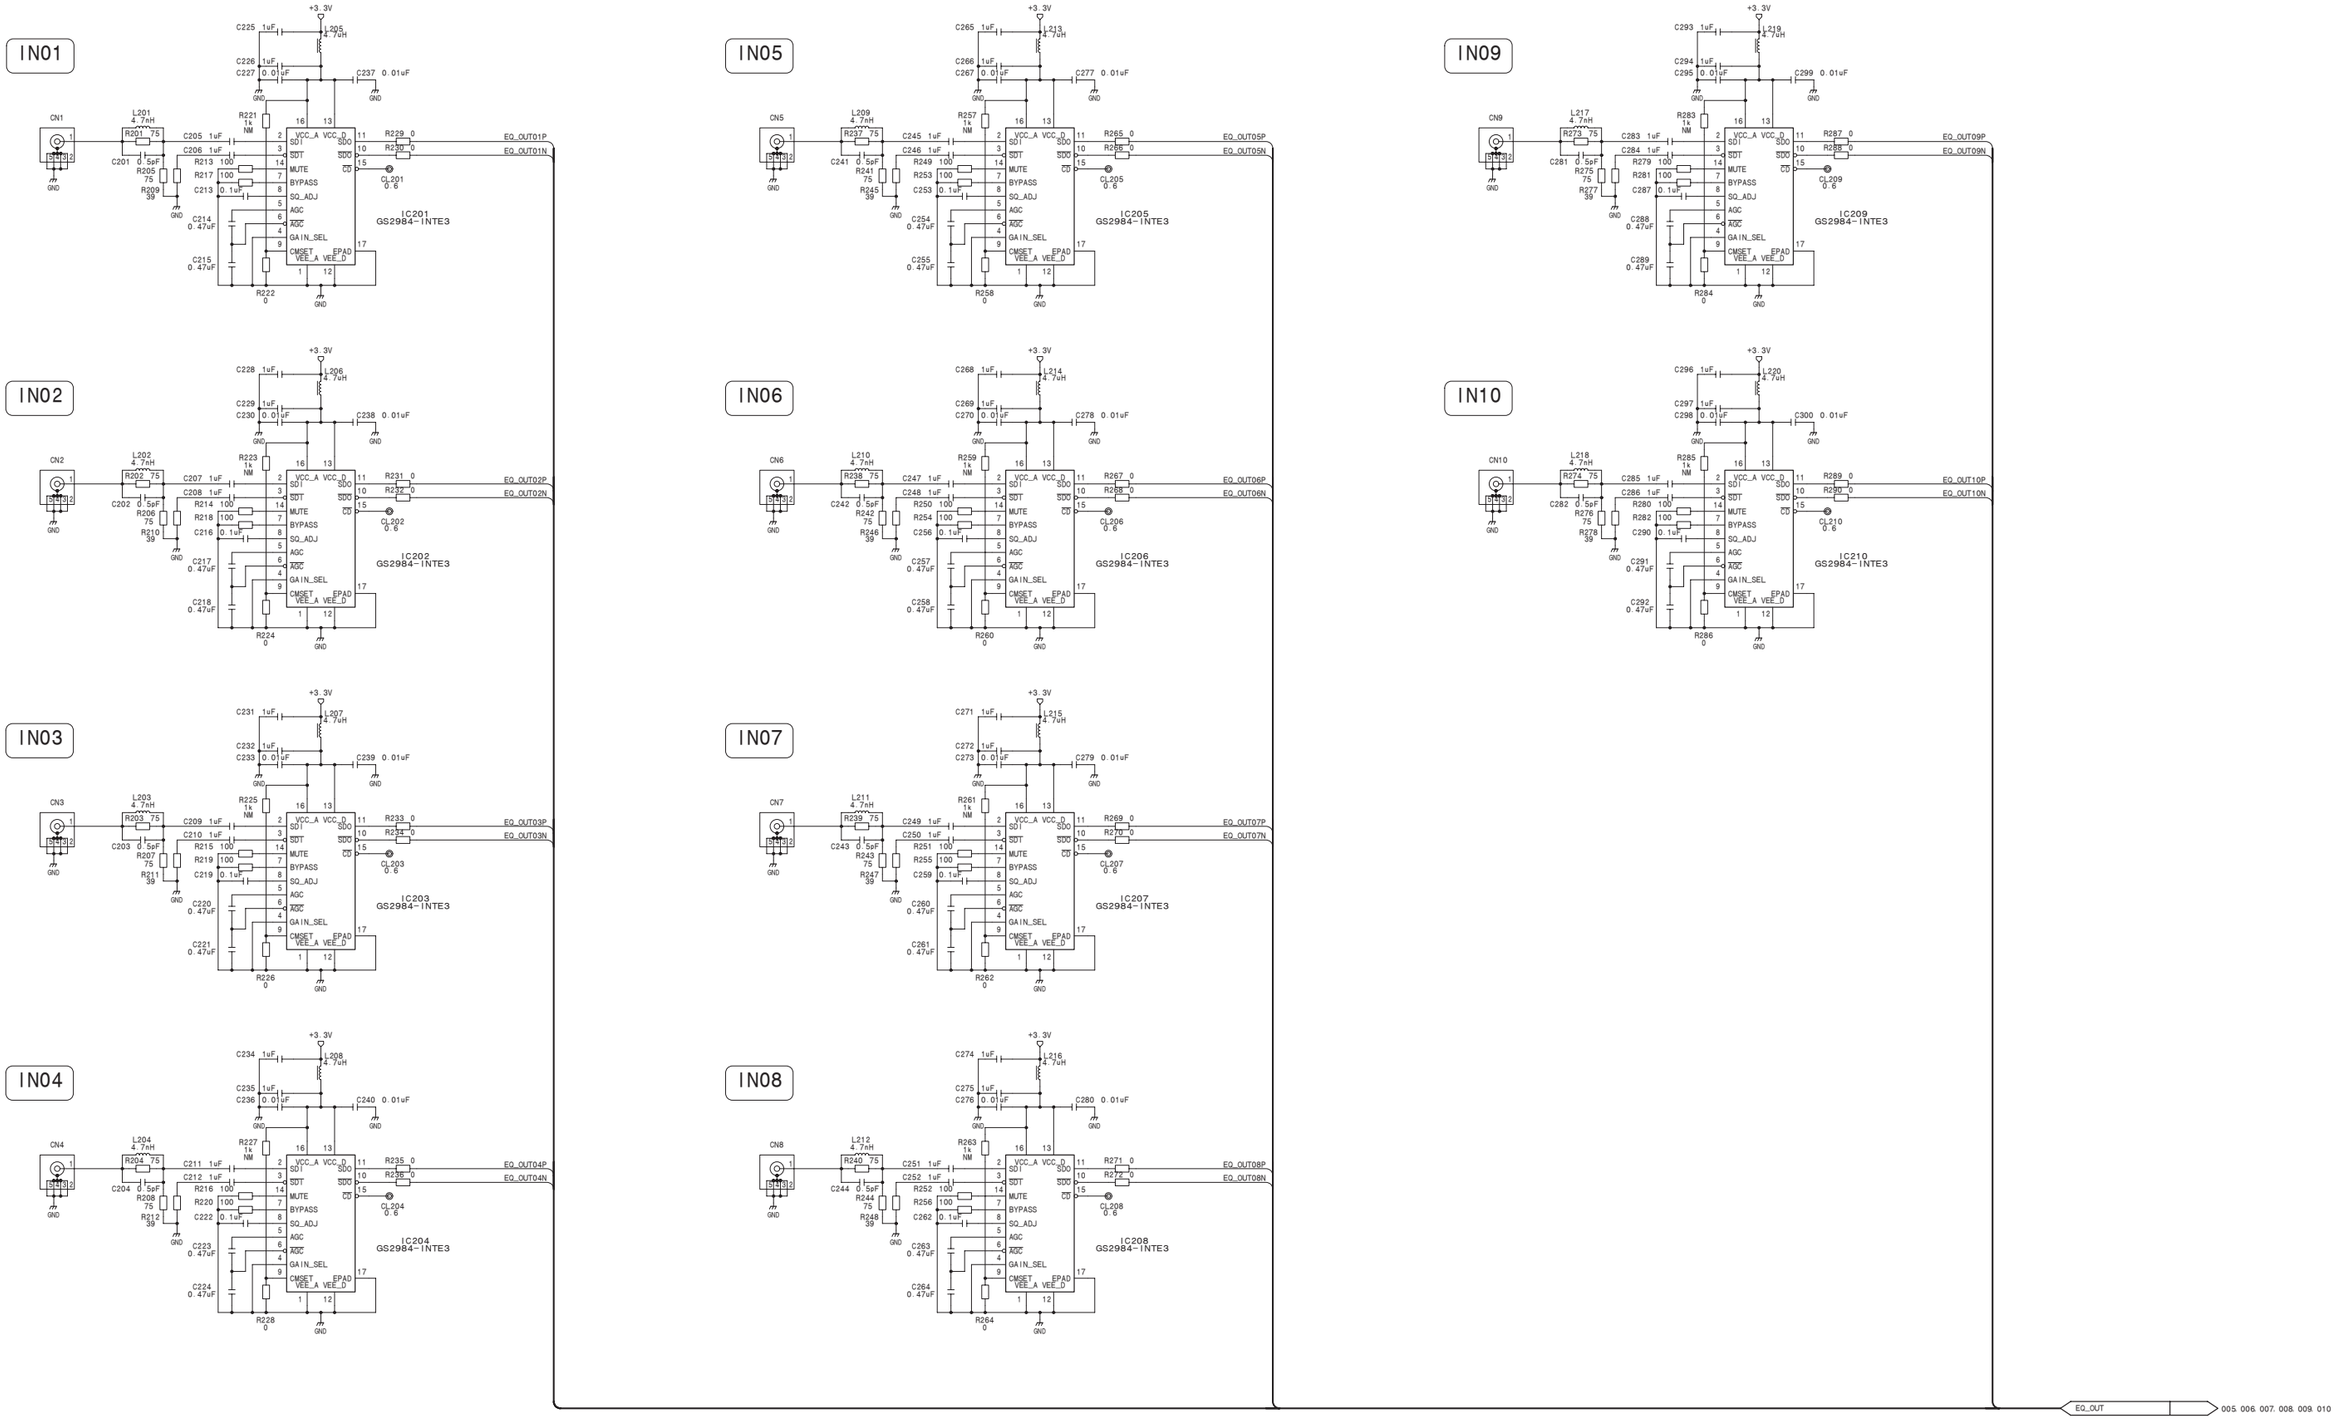

CNI-37 (4/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_4

CNI-37 (5/10)

SUFFIX: -11

CNI-37 (5/10)
SUFFIX: -11

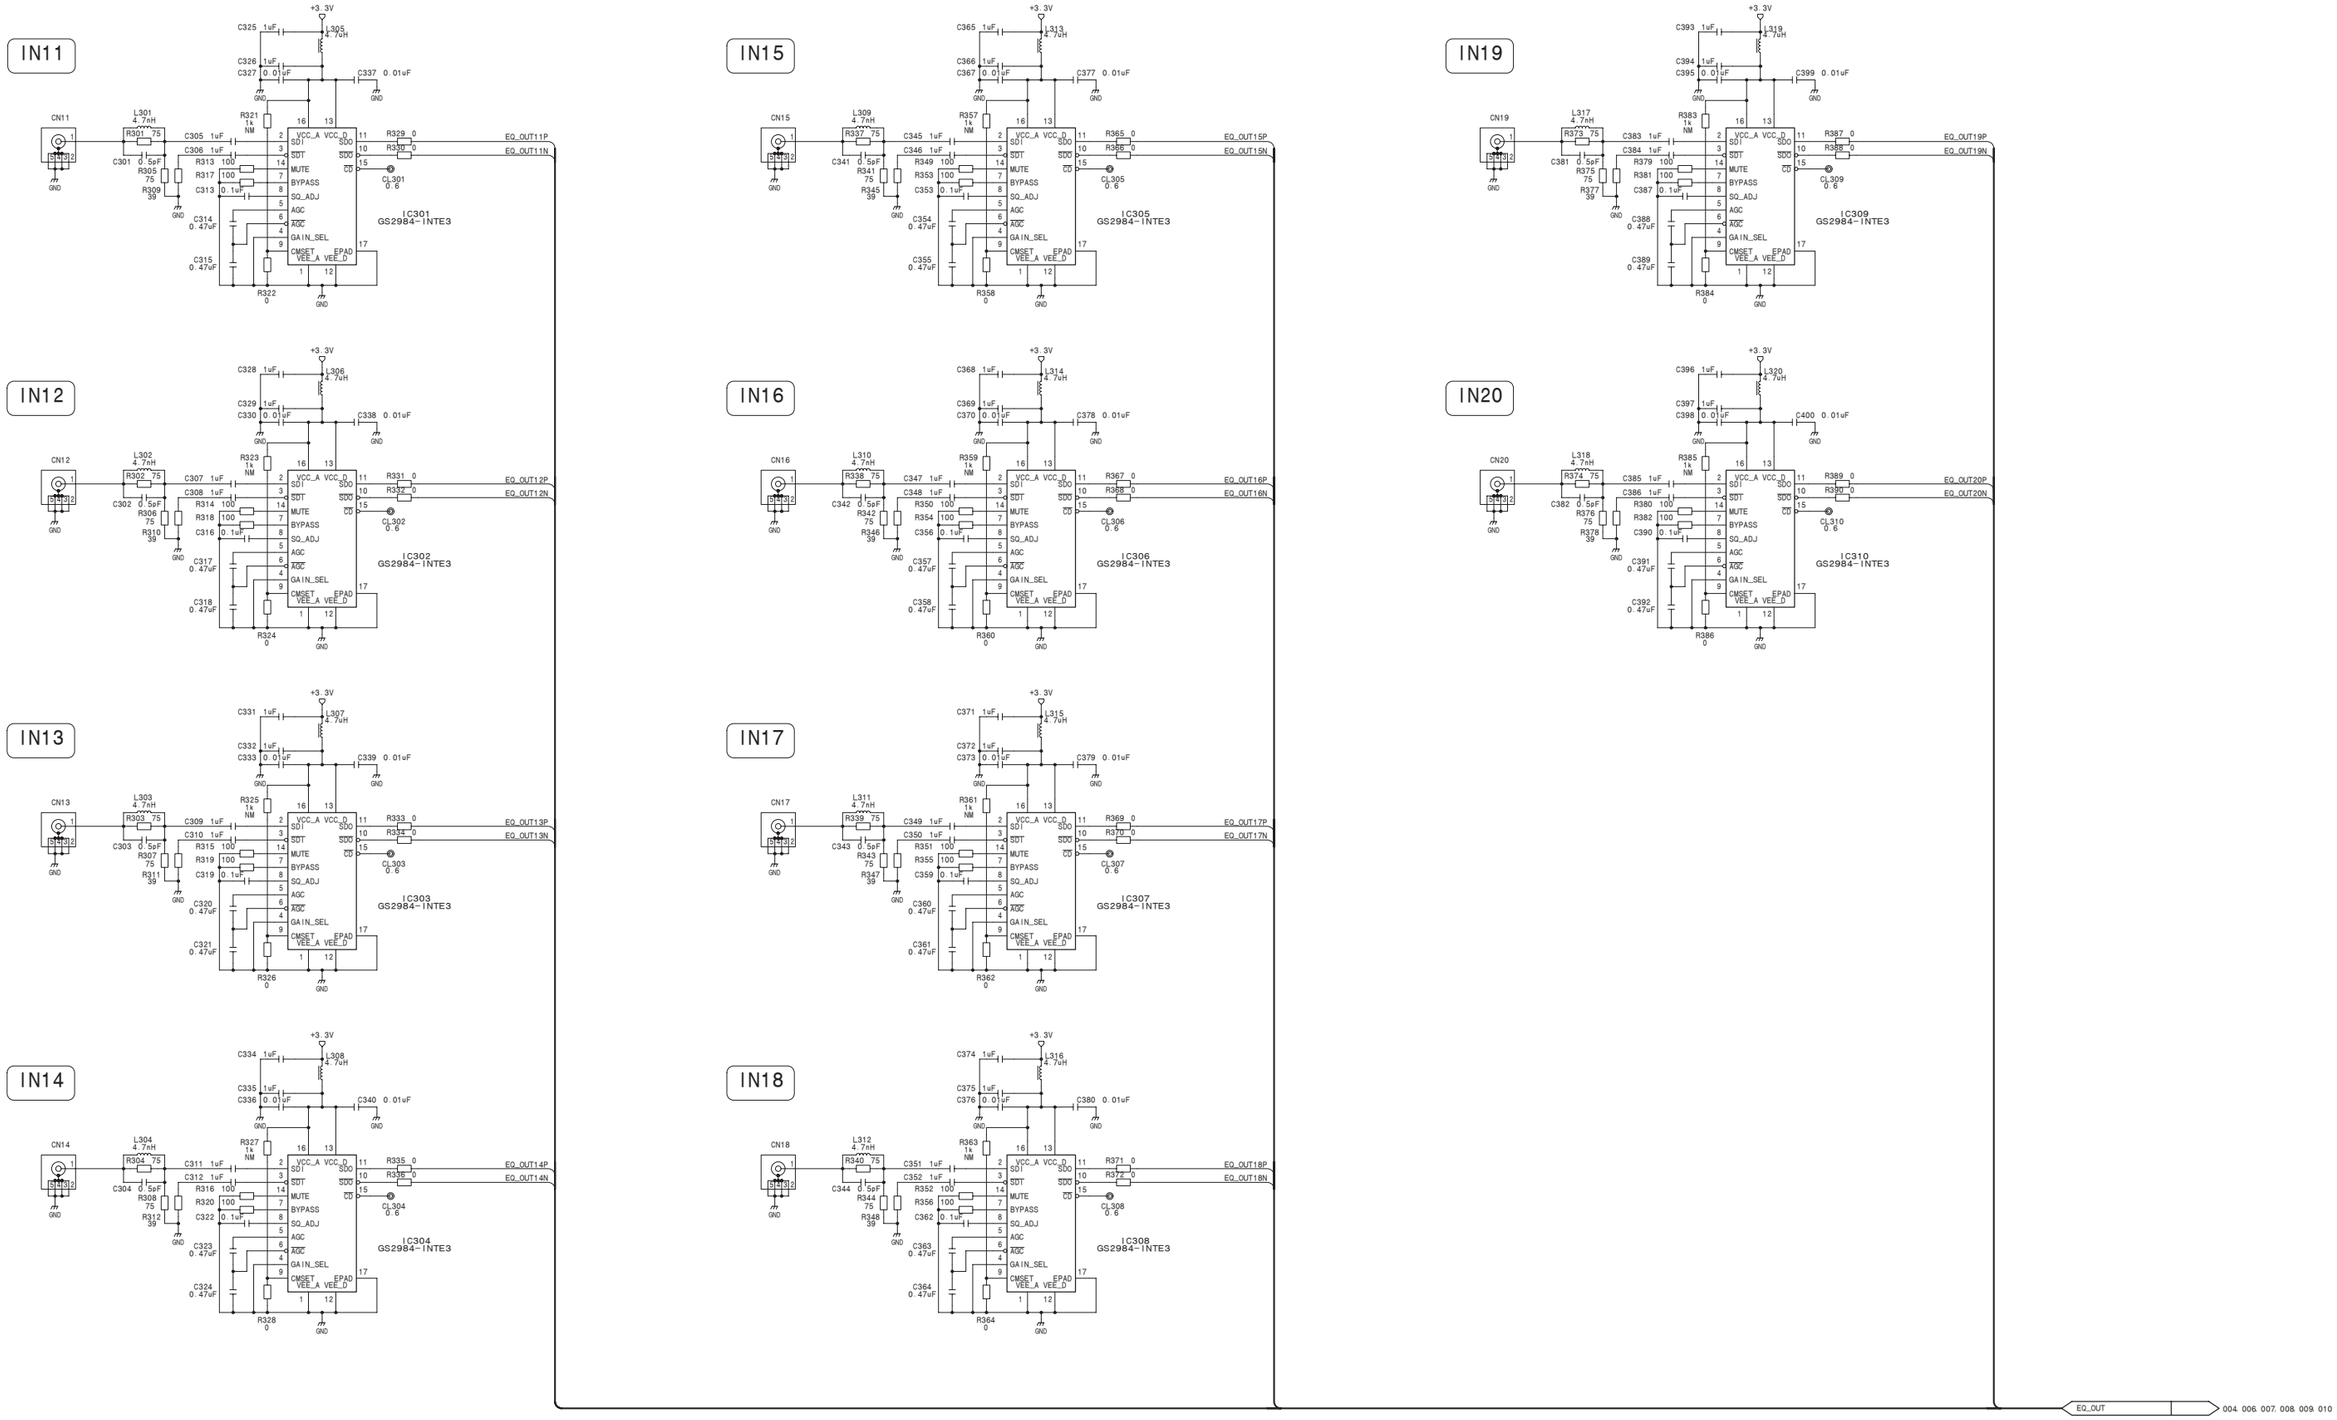

CNI-37 (5/10)

BOARD NO. 1-879-572-11

MVS-8000X_CNI-37_003_5

CNI-37 (6/10) **SUFFIX: -11**

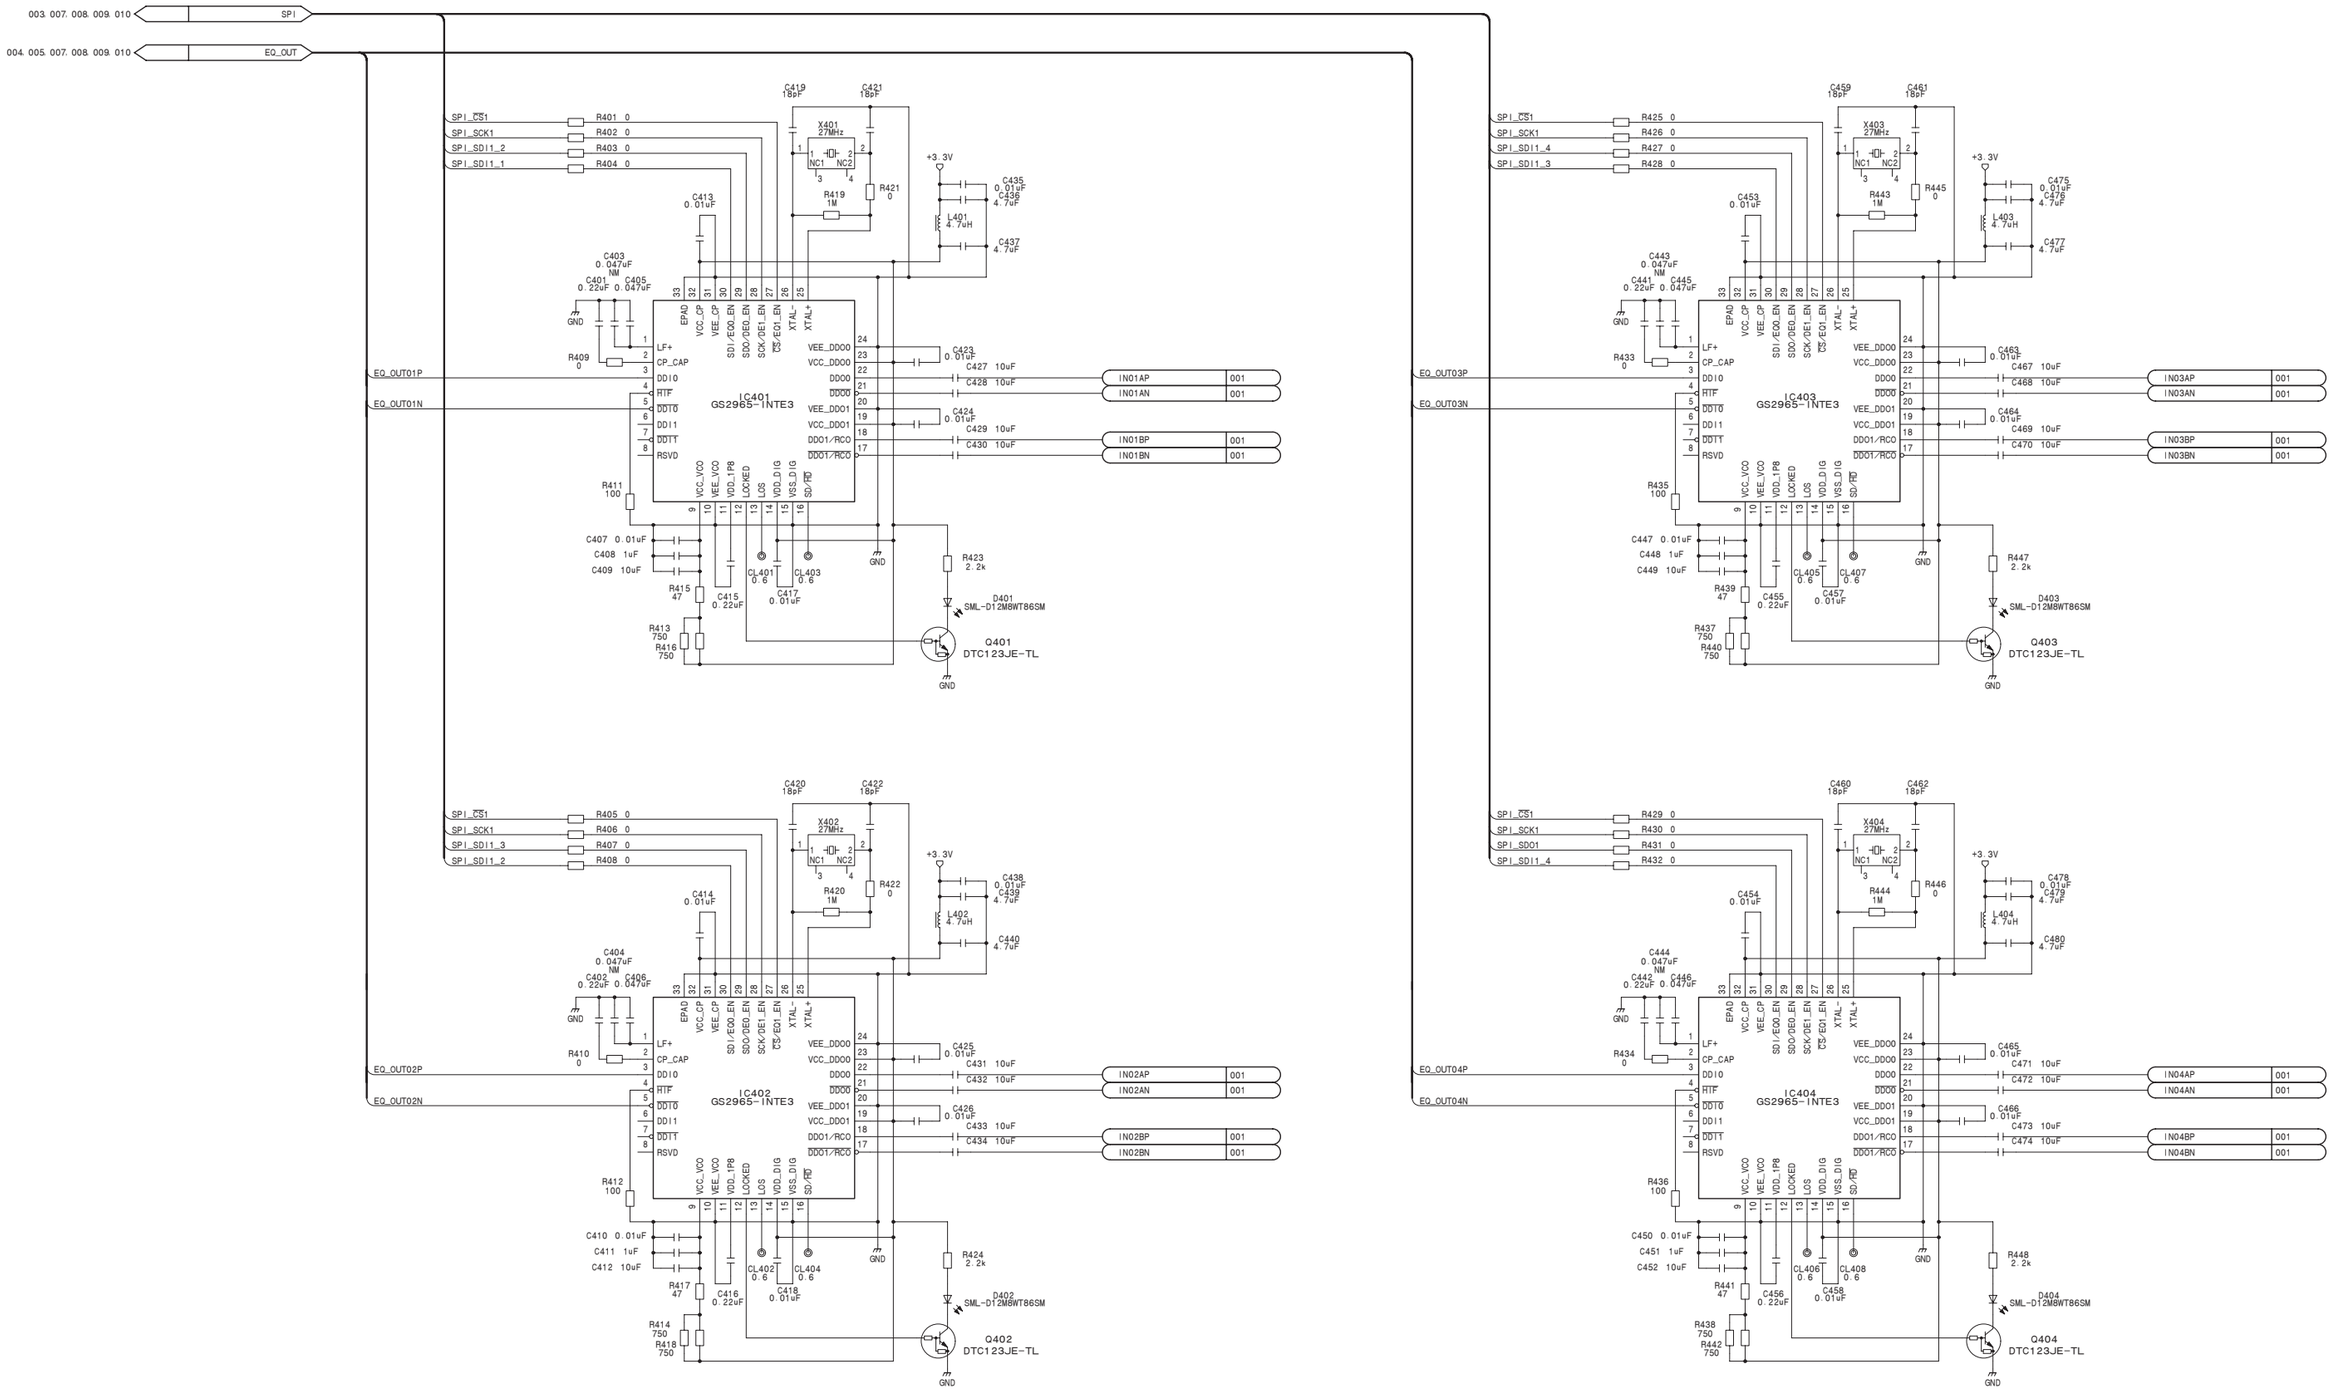

CNI-37 (6/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_6

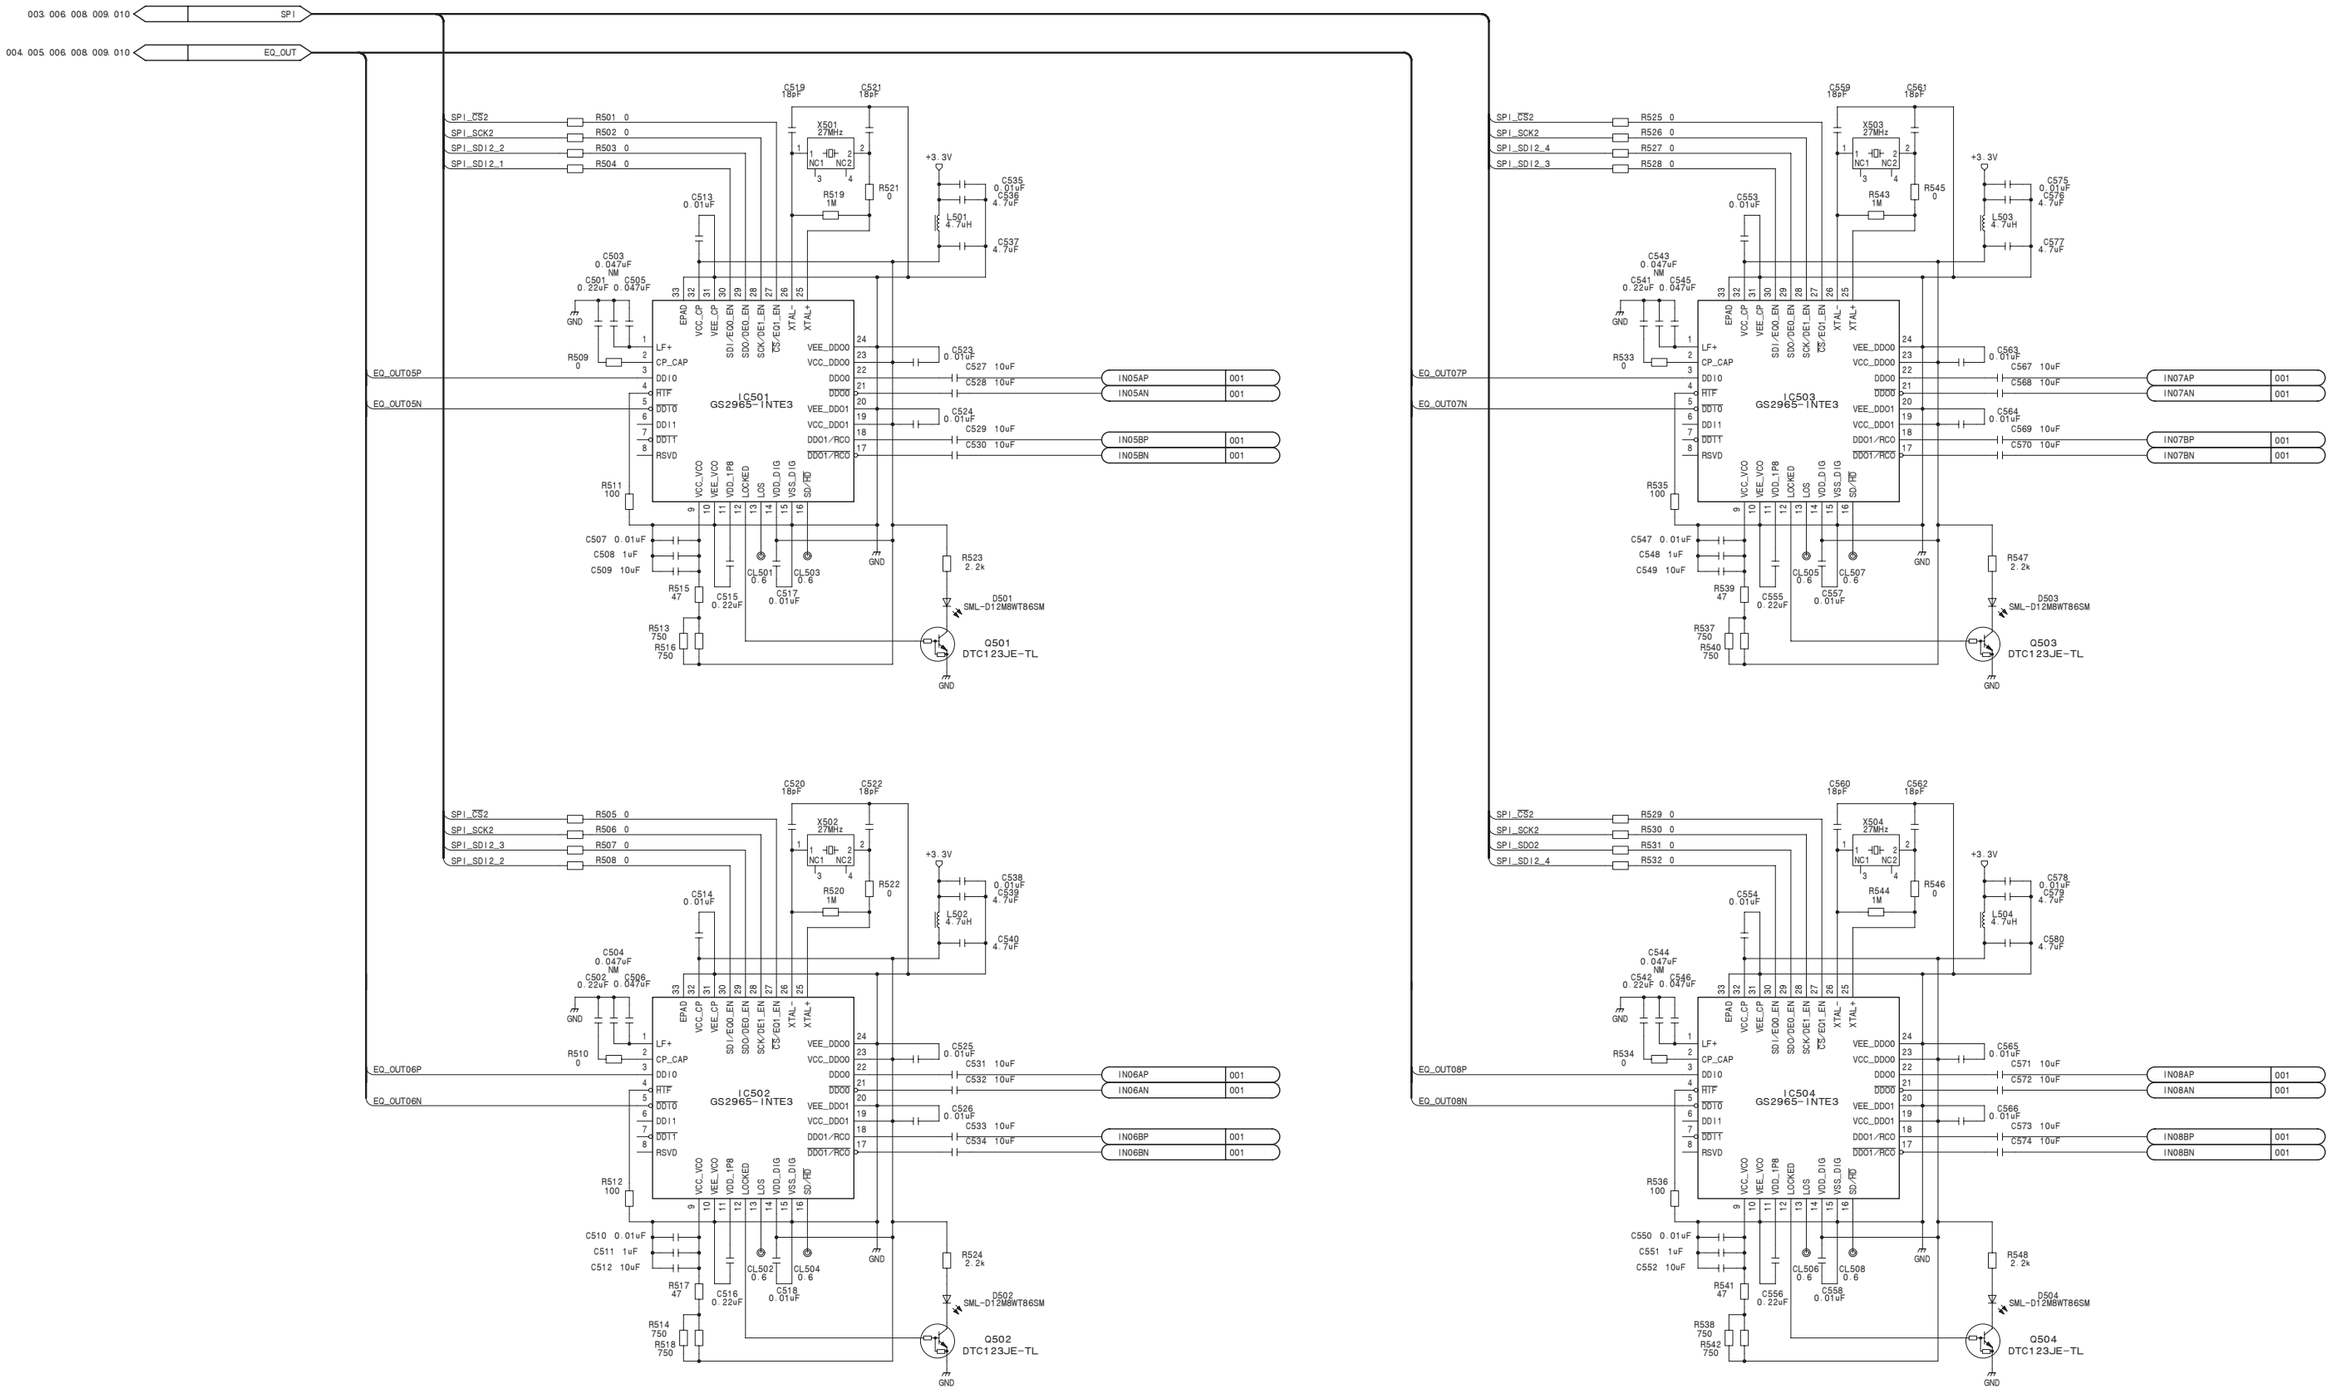

CNI-37 (7/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_7

CNI-37 (8/10) **SUFFIX: -11**

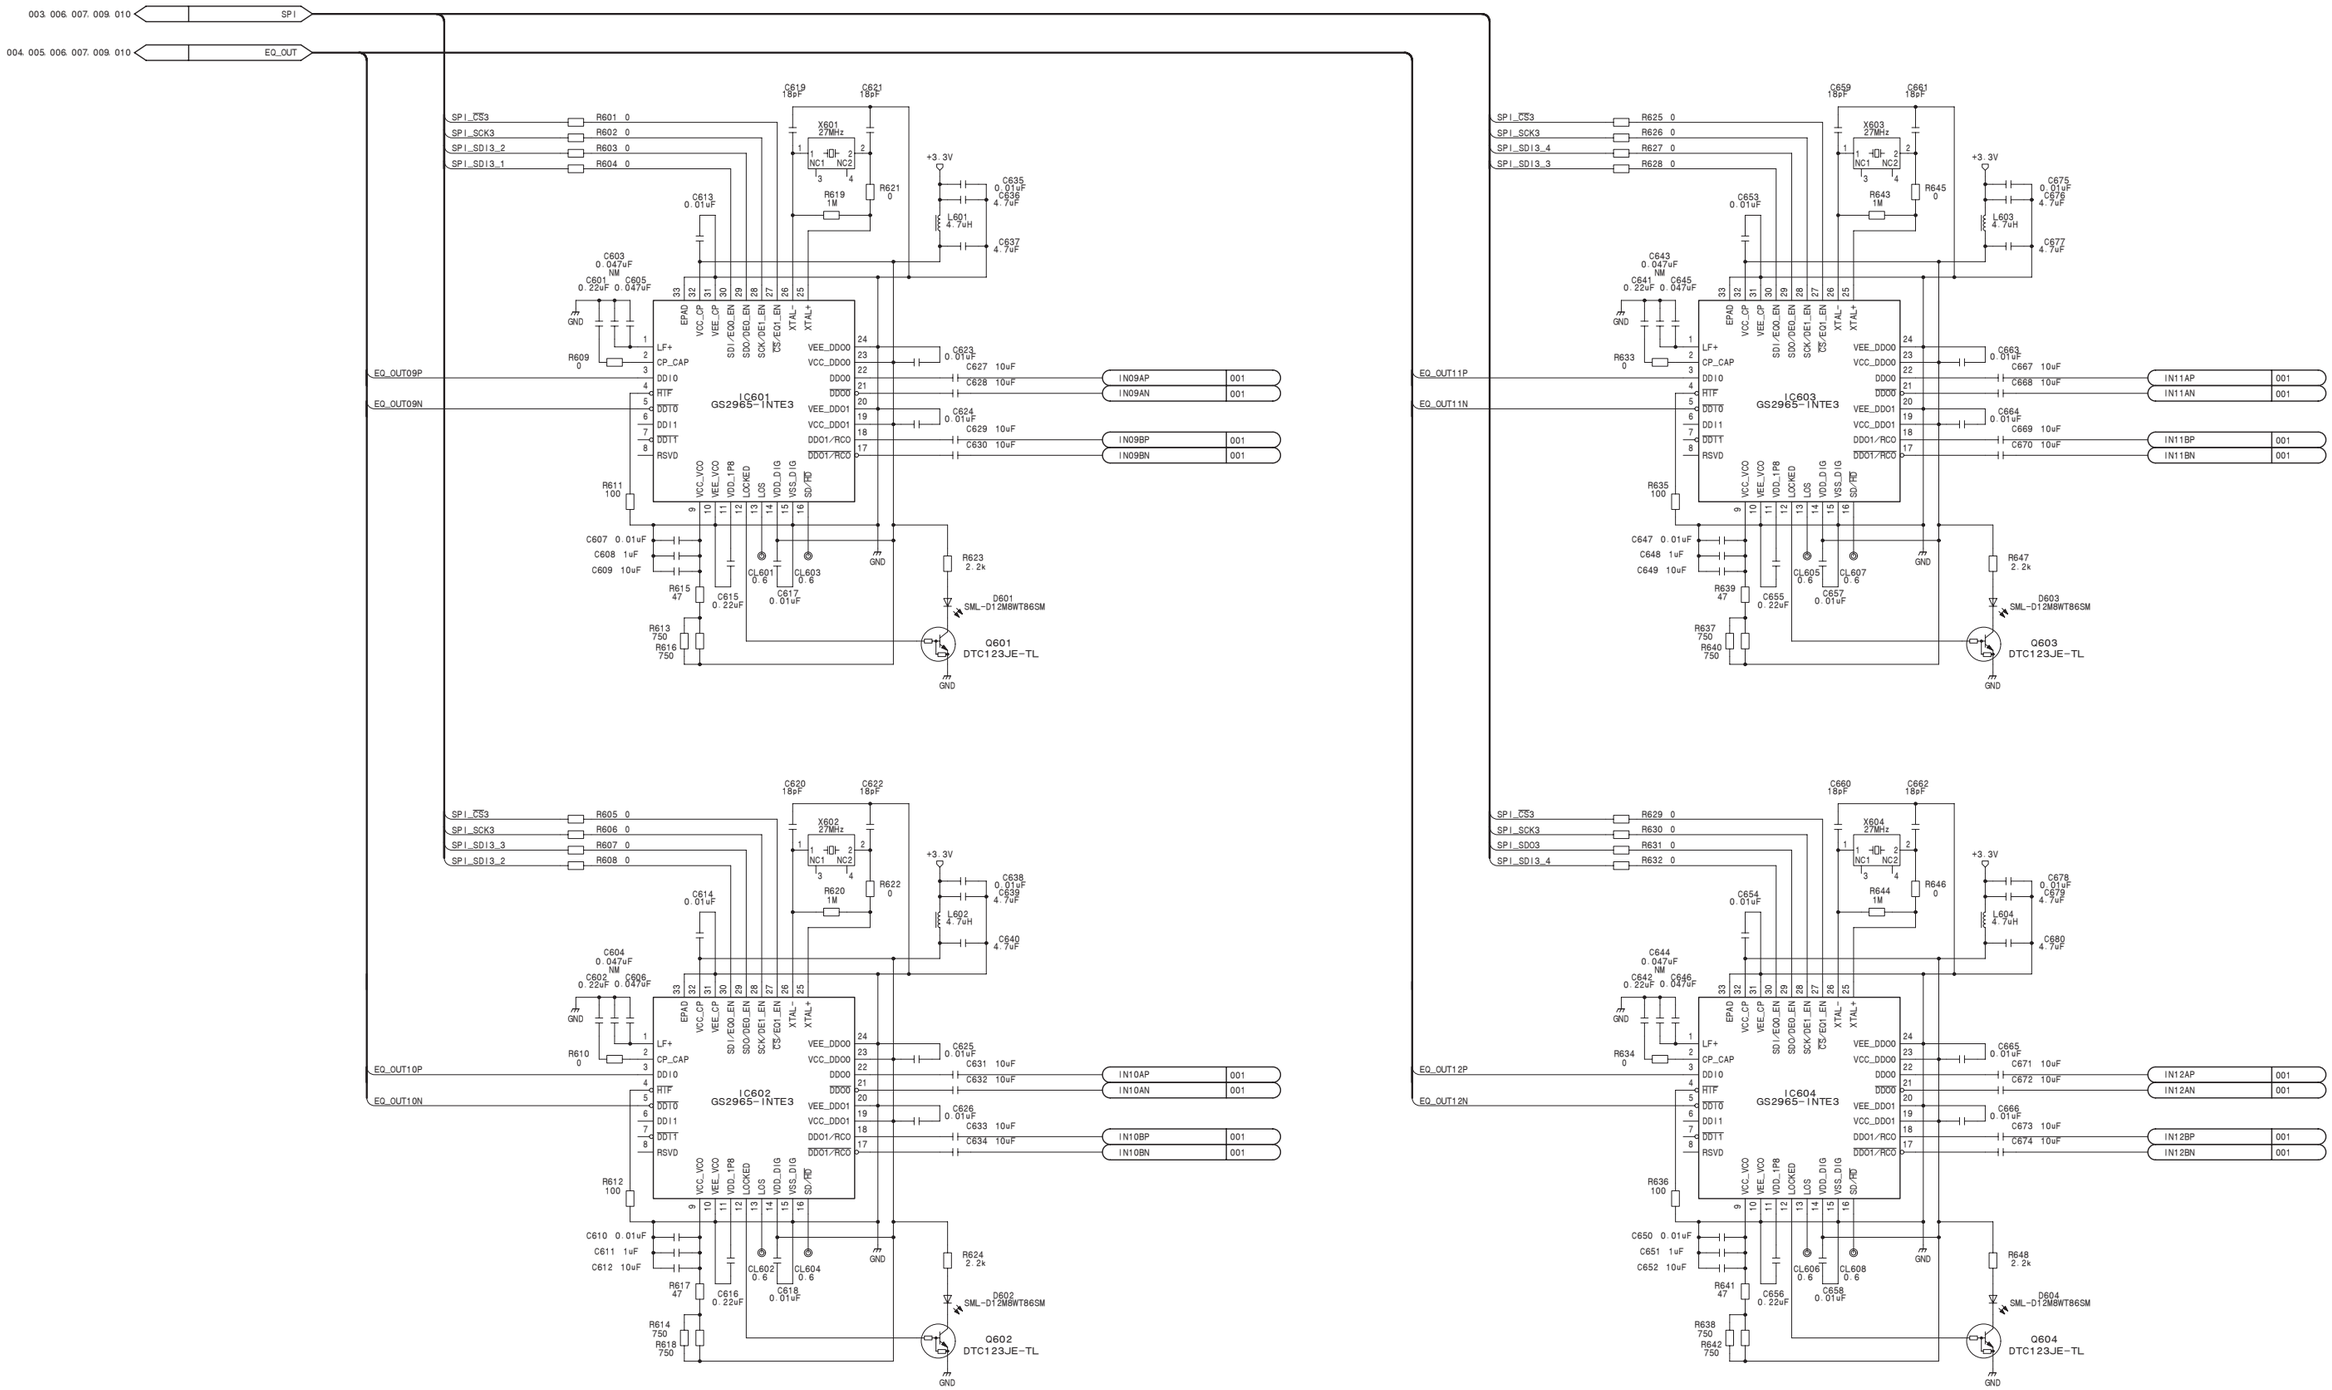

CNI-37 (8/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_8

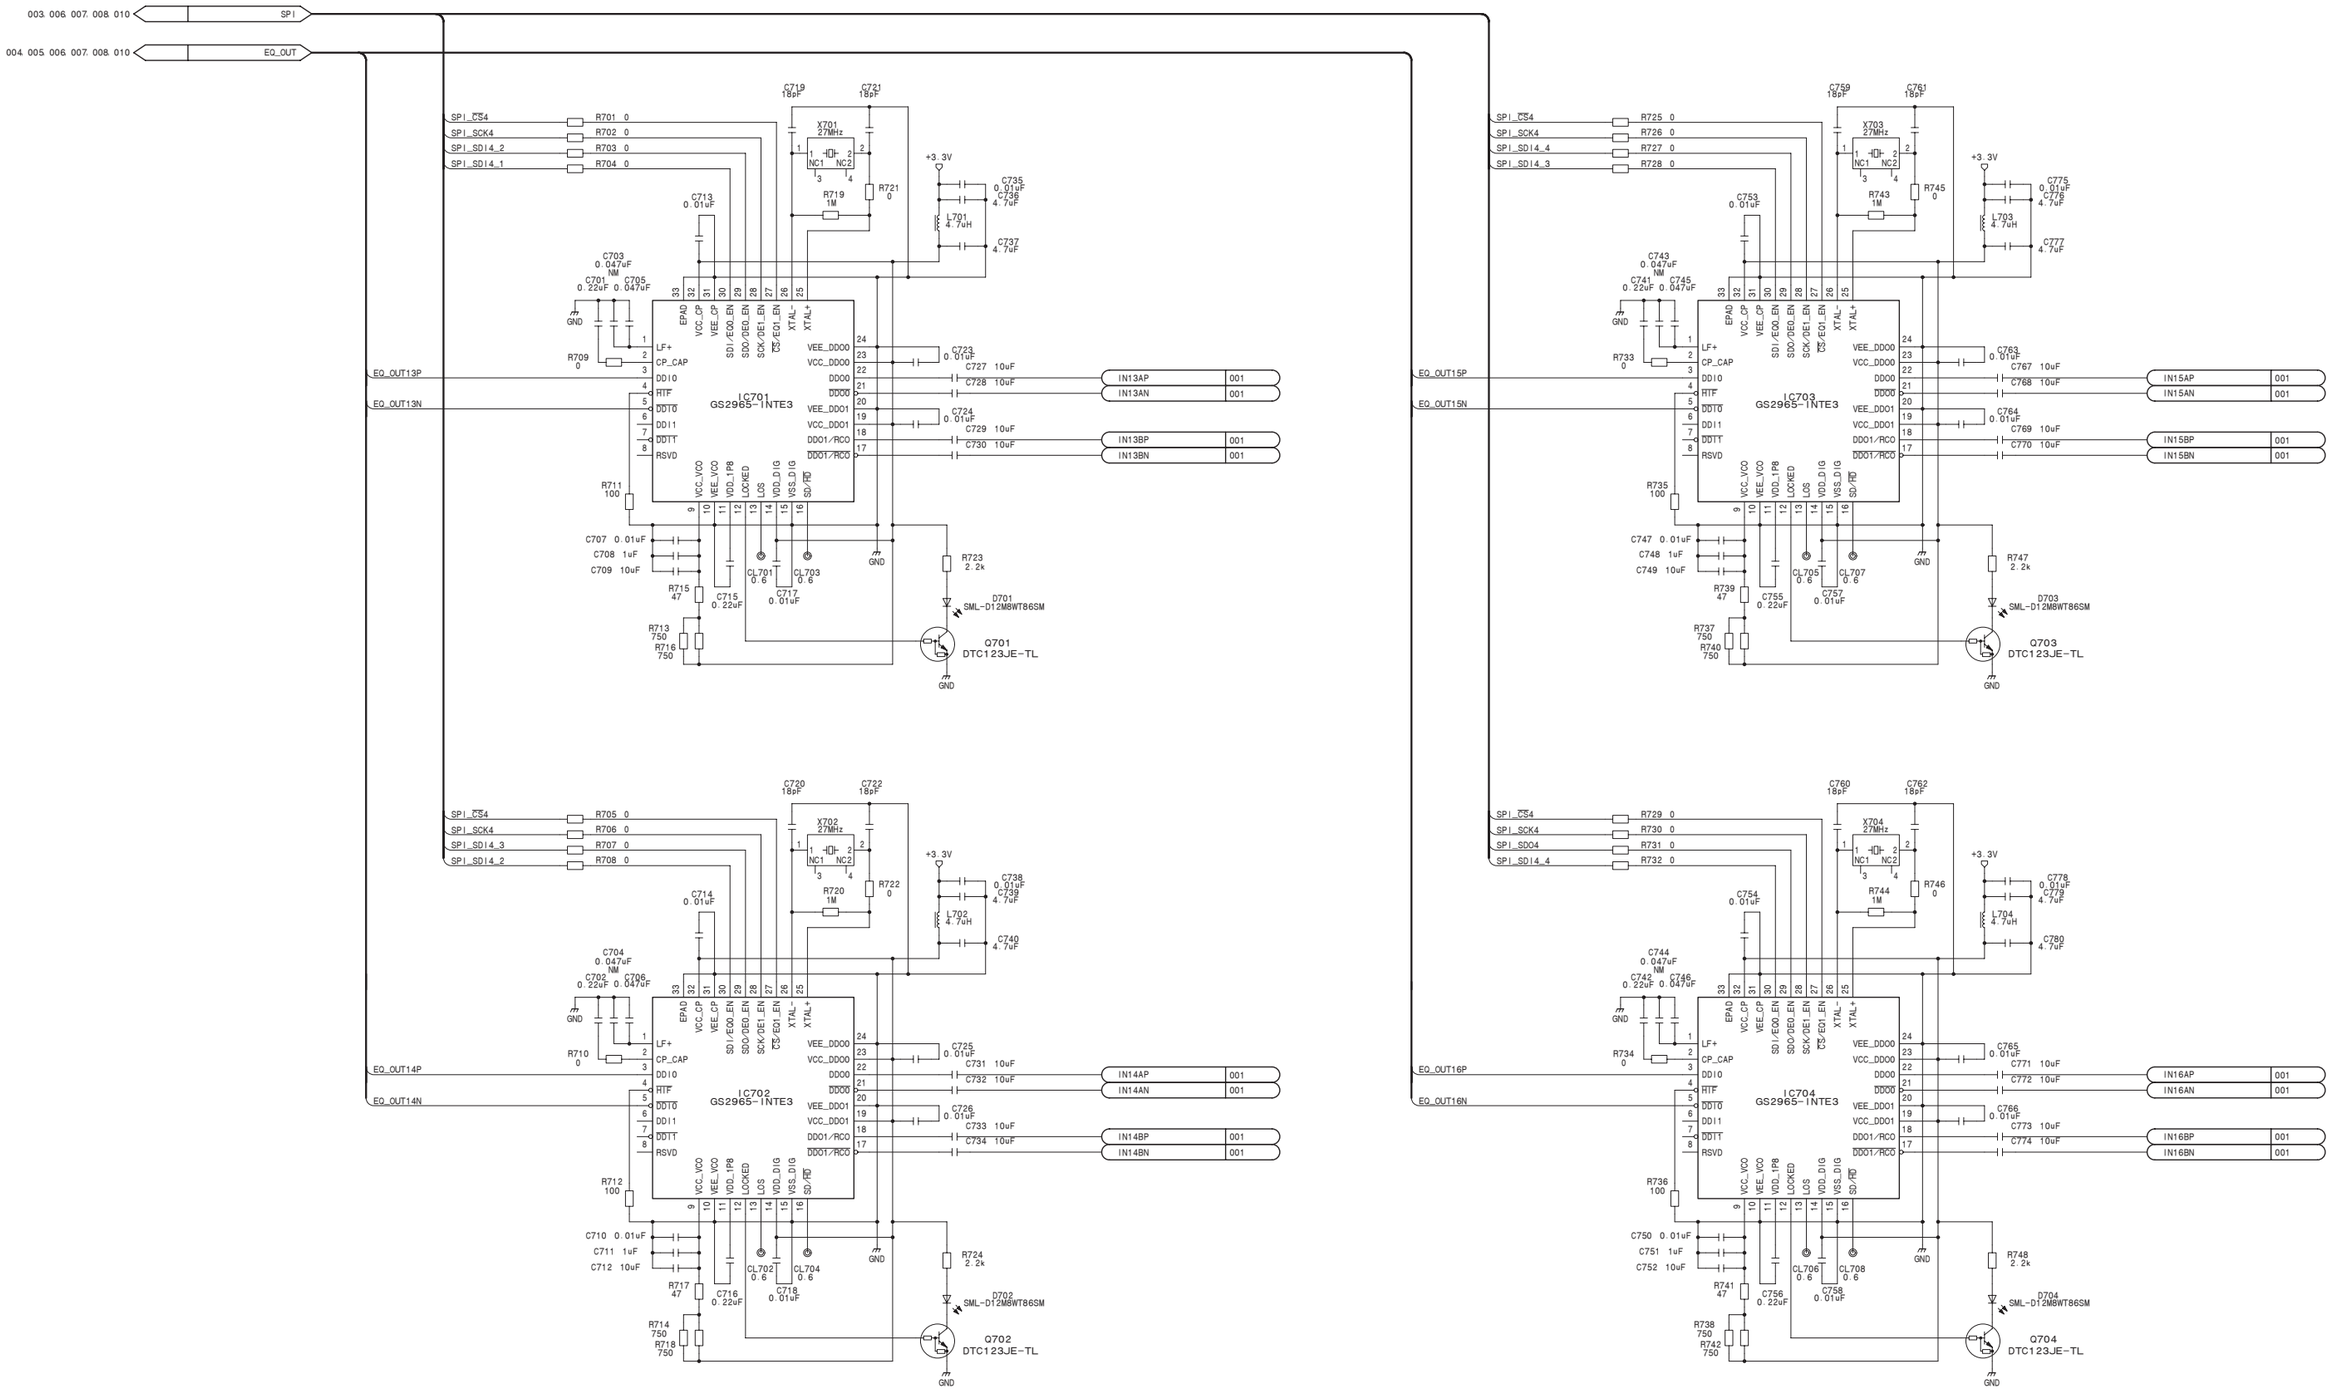

CNI-37 (9/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37_003_9

CNI-37 (10/10) **SUFFIX: -11**

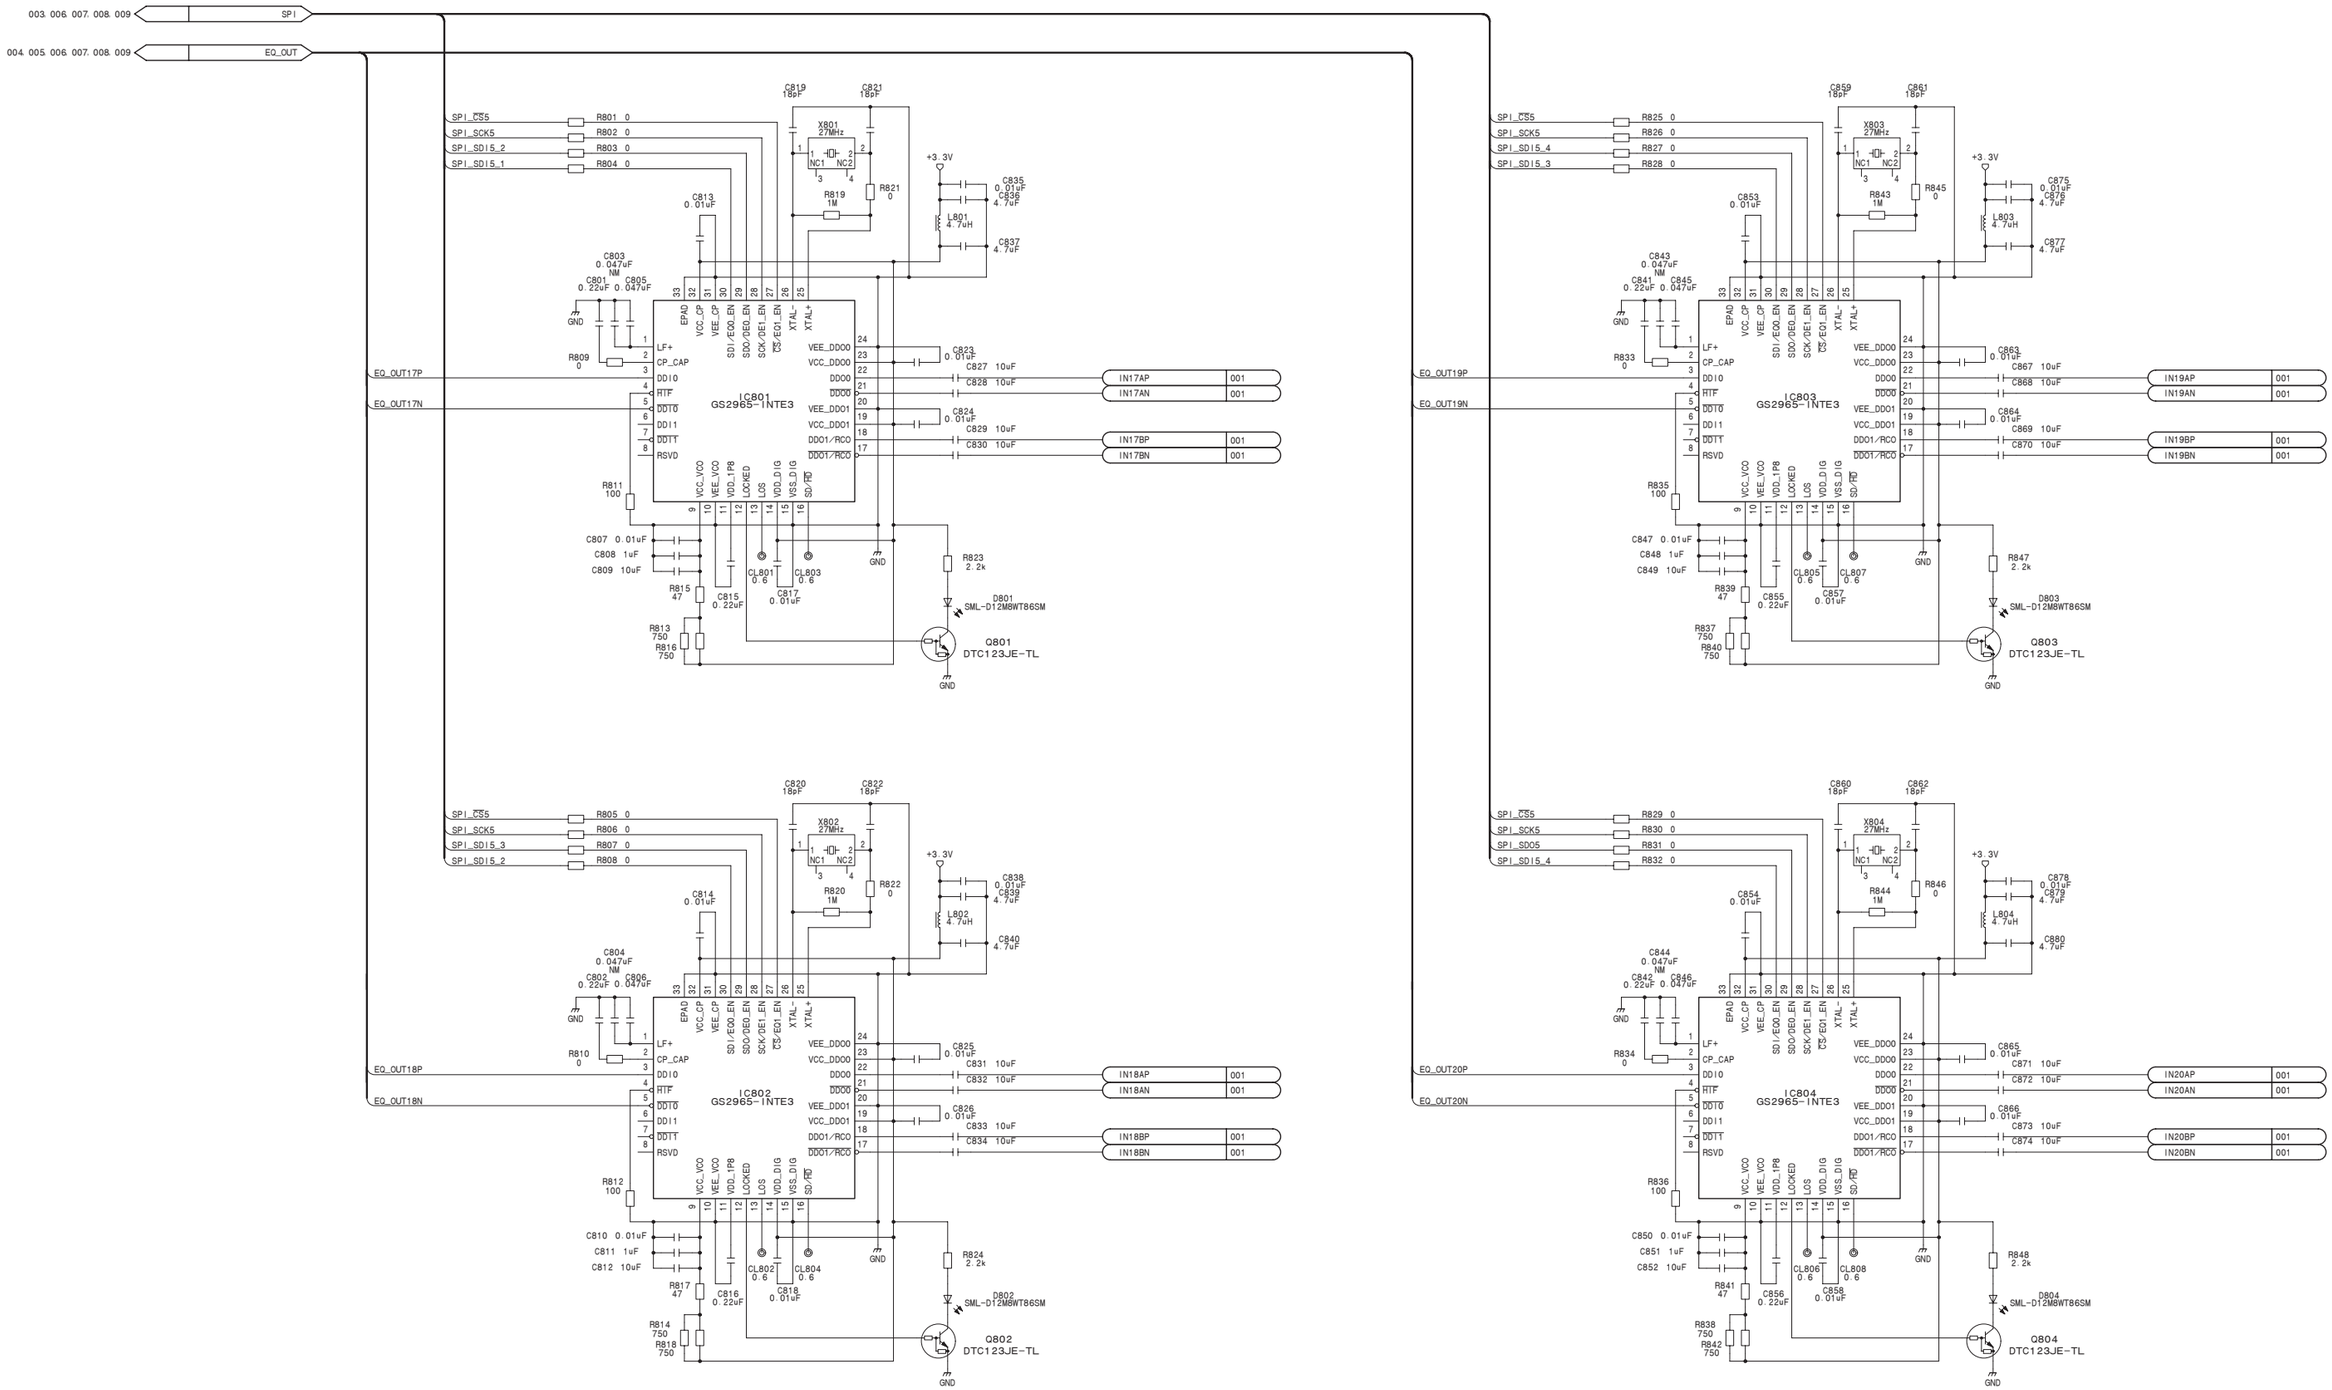

CNI-37 (10/10)

BOARD NO. 1-879-572-11

MVS-8000X_CNI-37_003_10

4-108

CNI-37 (1/10)
SUFFIX: -12

CNM1

	A	B	BG	C	D	DG
1	IN01BP	IN01BN	GND	IN01AP	IN01AN	GND
2	IN02BP	IN02BN	GND	IN02AP	IN02AN	GND
3	IN03BP	IN03BN	GND	IN03AP	IN03AN	GND
4	IN04BP	IN04BN	GND	IN04AP	IN04AN	GND
5	IN05BP	IN05BN	GND	IN05AP	IN05AN	GND
6	IN06BP	IN06BN	GND	IN06AP	IN06AN	GND
7	IN07BP	IN07BN	GND	IN07AP	IN07AN	GND
8	IN08BP	IN08BN	GND	IN08AP	IN08AN	GND
9	IN09BP	IN09BN	GND	IN09AP	IN09AN	GND
10	IN10BP	IN10BN	GND	IN10AP	IN10AN	GND

CNF1

	A	B	BG	C	D	DG
1	IN11BP	IN11BN	GND	IN11AP	IN11AN	GND
2	IN12BP	IN12BN	GND	IN12AP	IN12AN	GND
3	IN13BP	IN13BN	GND	IN13AP	IN13AN	GND
4	IN14BP	IN14BN	GND	IN14AP	IN14AN	GND
5	IN15BP	IN15BN	GND	IN15AP	IN15AN	GND
6	IN16BP	IN16BN	GND	IN16AP	IN16AN	GND
7	IN17BP	IN17BN	GND	IN17AP	IN17AN	GND
8	IN18BP	IN18BN	GND	IN18AP	IN18AN	GND
9	IN19BP	IN19BN	GND	IN19AP	IN19AN	GND
10	IN20BP	IN20BN	GND	IN20AP	IN20AN	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	SLOT_No4	SLOT_No5	GND	SLOT_No6	SLOT_No7	GND
4	SLOT_No0	SLOT_No1	GND	SLOT_No2	SLOT_No3	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	I2C_SCL	I2C_SDA	GND
6	RESET	(DC_ENBL)	GND	X/XSF	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNI-37 (1/10)

BOARD NO. 1-879-572-12

MVS-8000X_CNI-37_005_1

4-99 (a)

A B C D E F G H

1 2 3 4 5

CNI-37 (2/10)
SUFFIX: -12

CNI-37 (2/10)
SUFFIX: -12

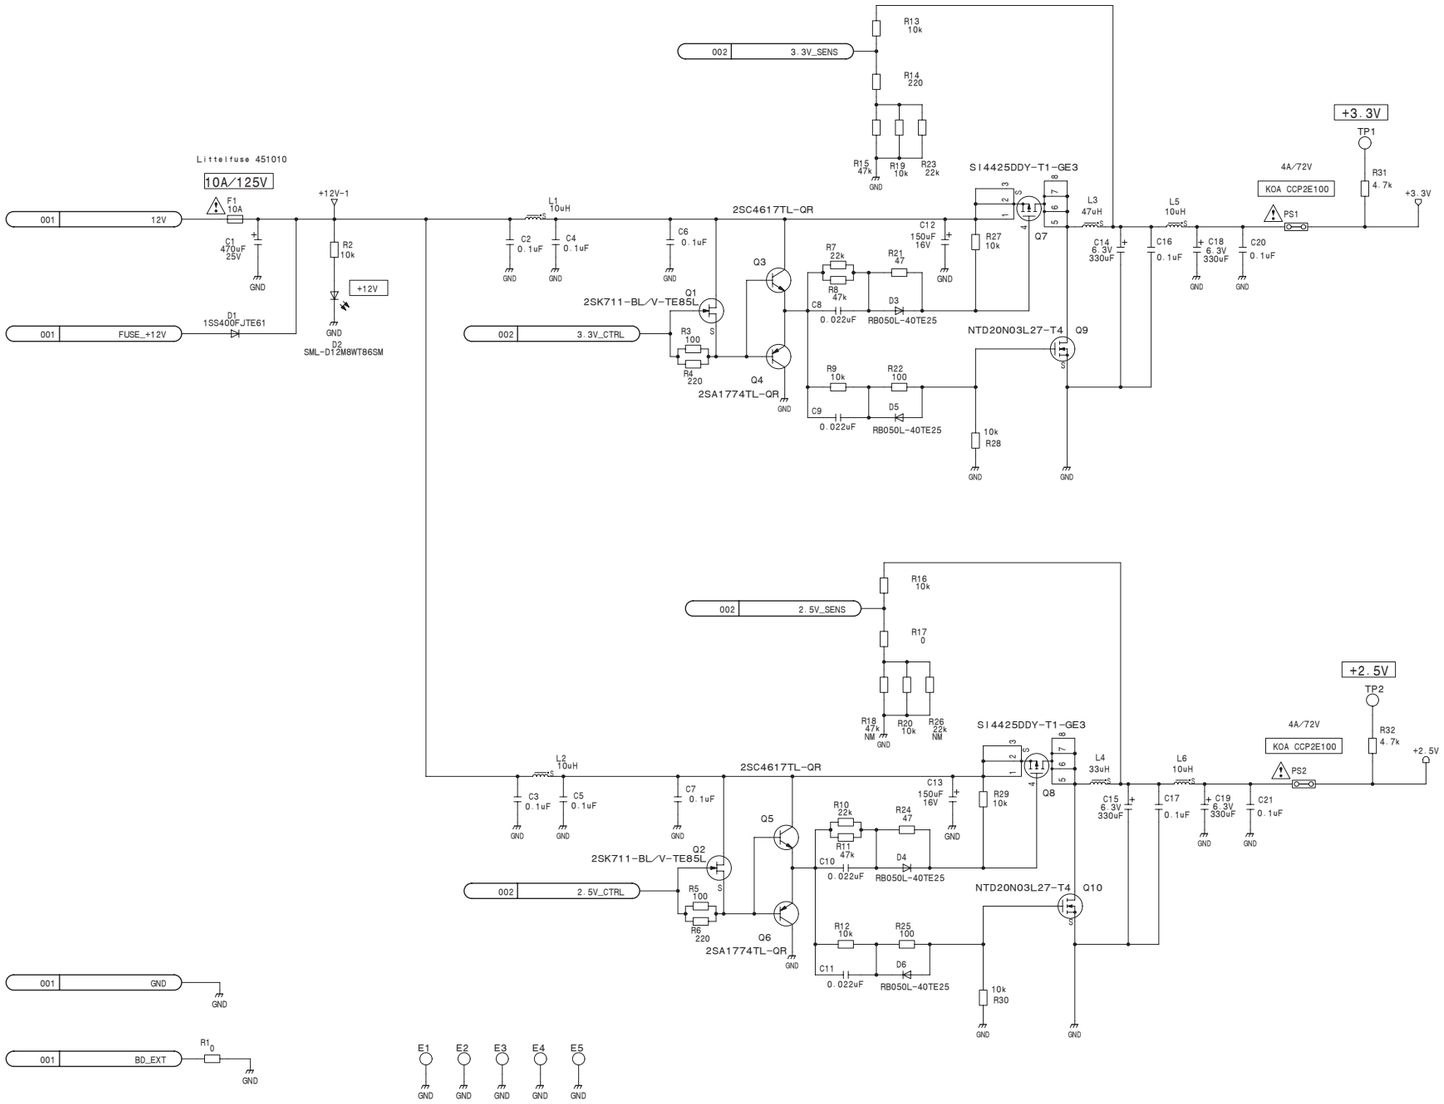

CNI-37 (2/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_2

CNI-37 (3/10)

SUFFIX: -12

CNI-37 (3/10)

SUFFIX: -12

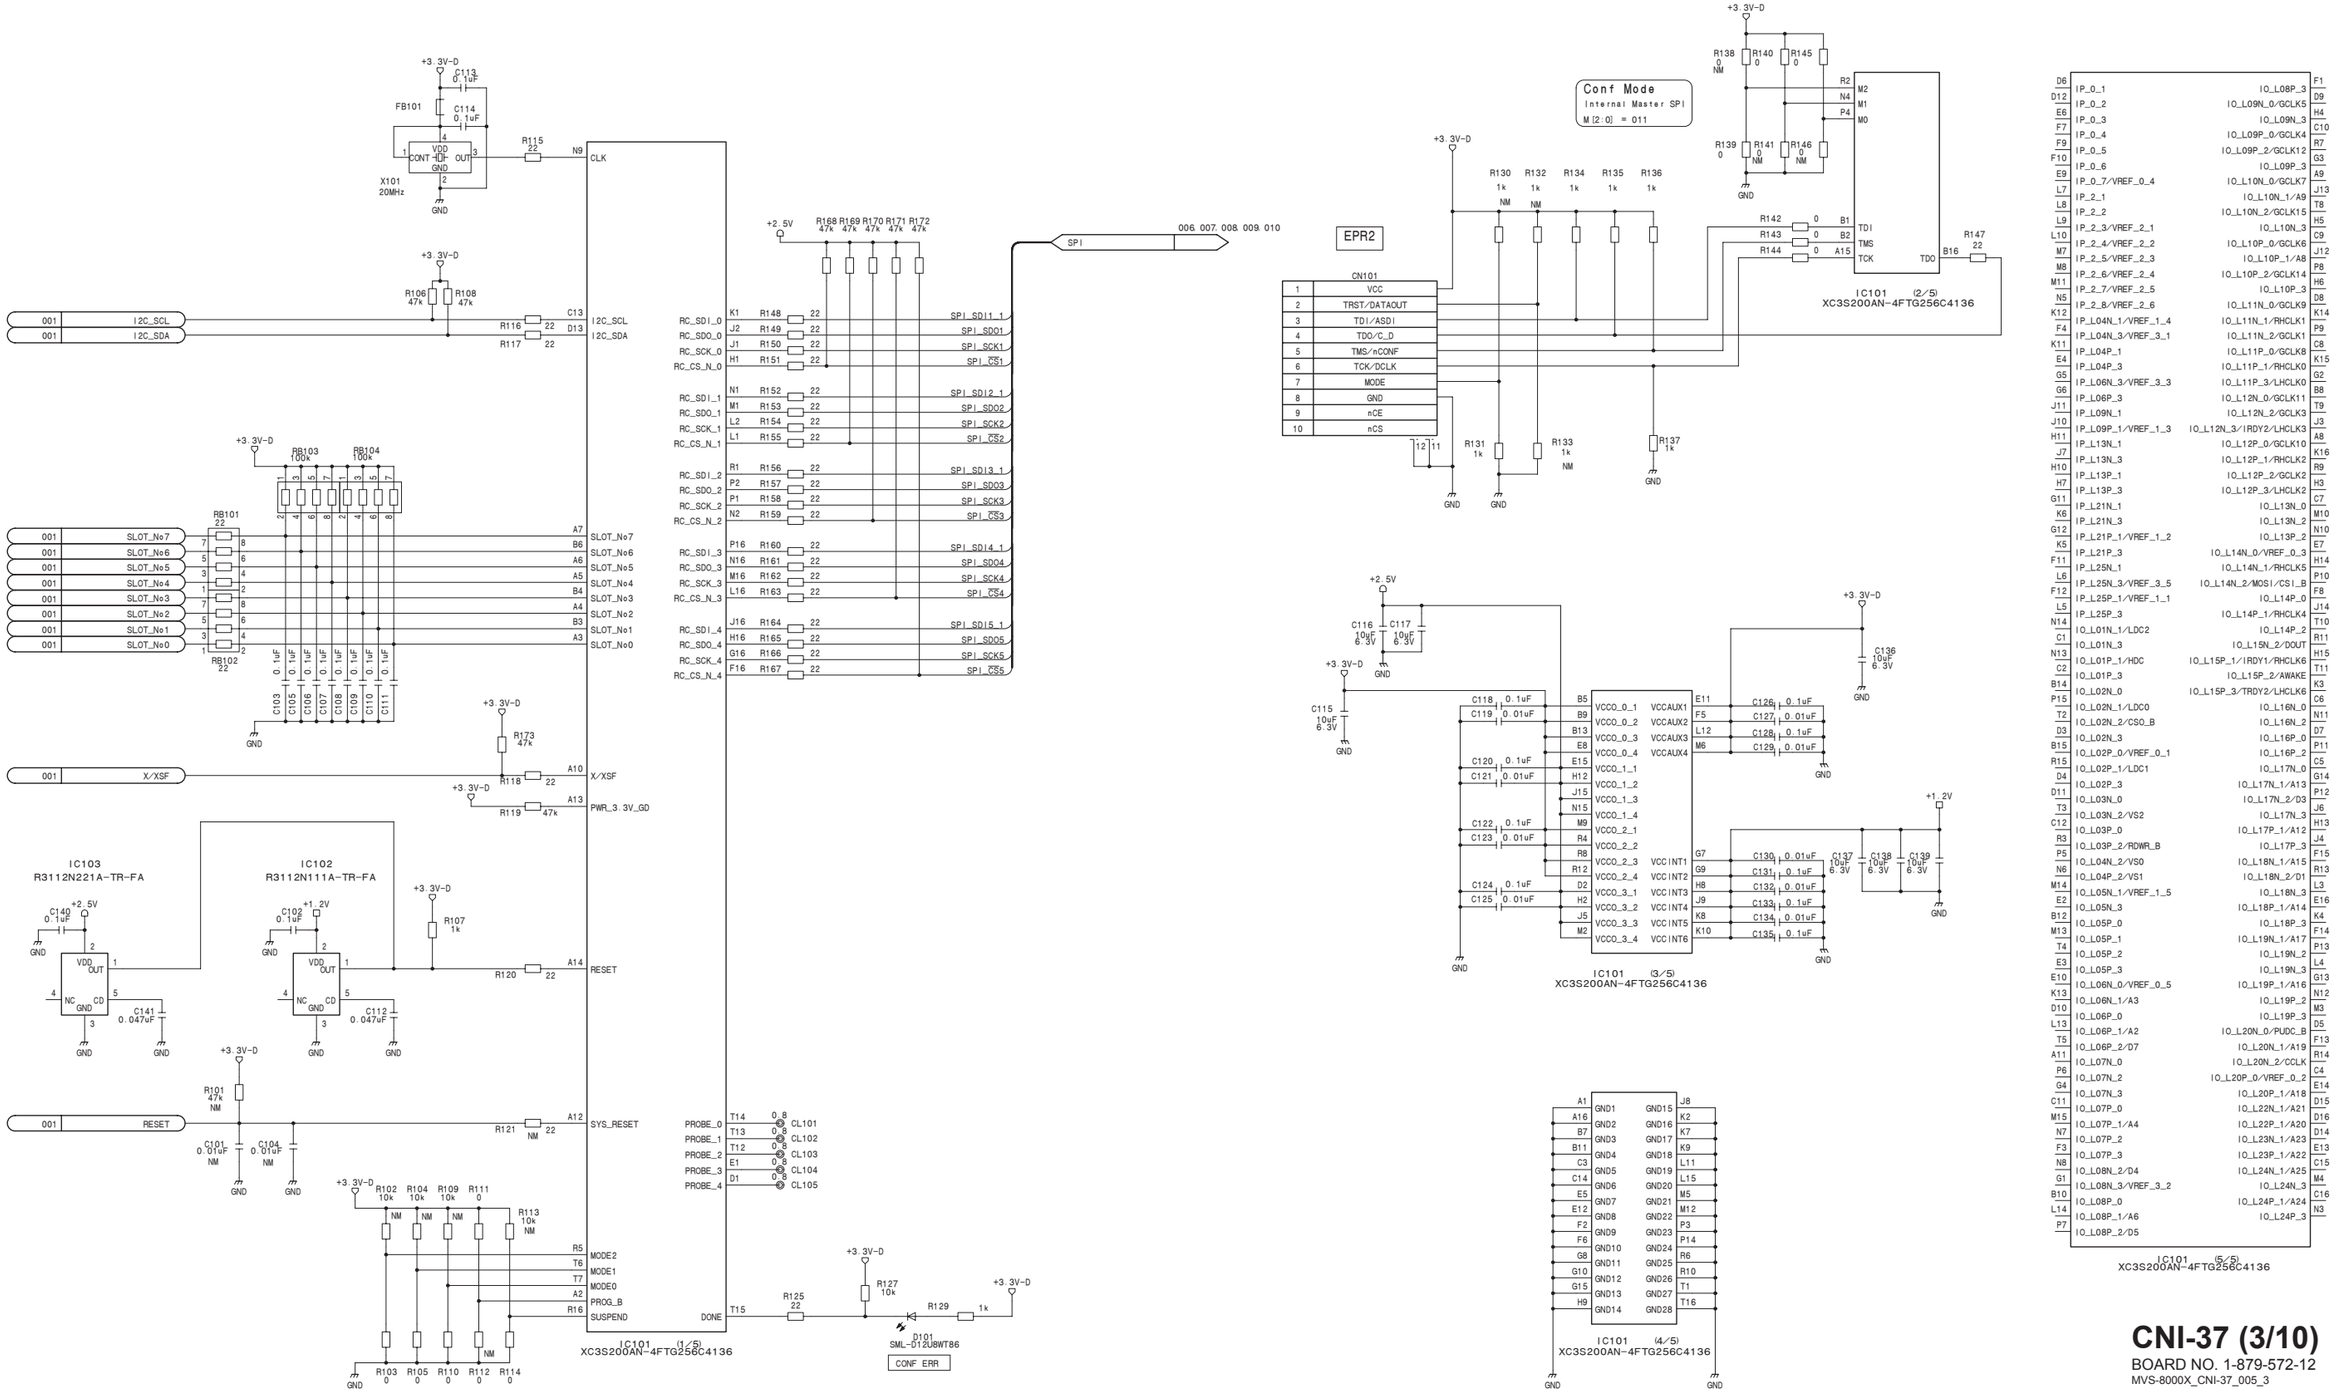

CNI-37 (3/10)

BOARD NO. 1-879-572-12

MVS-8000X_CNI-37_005_3

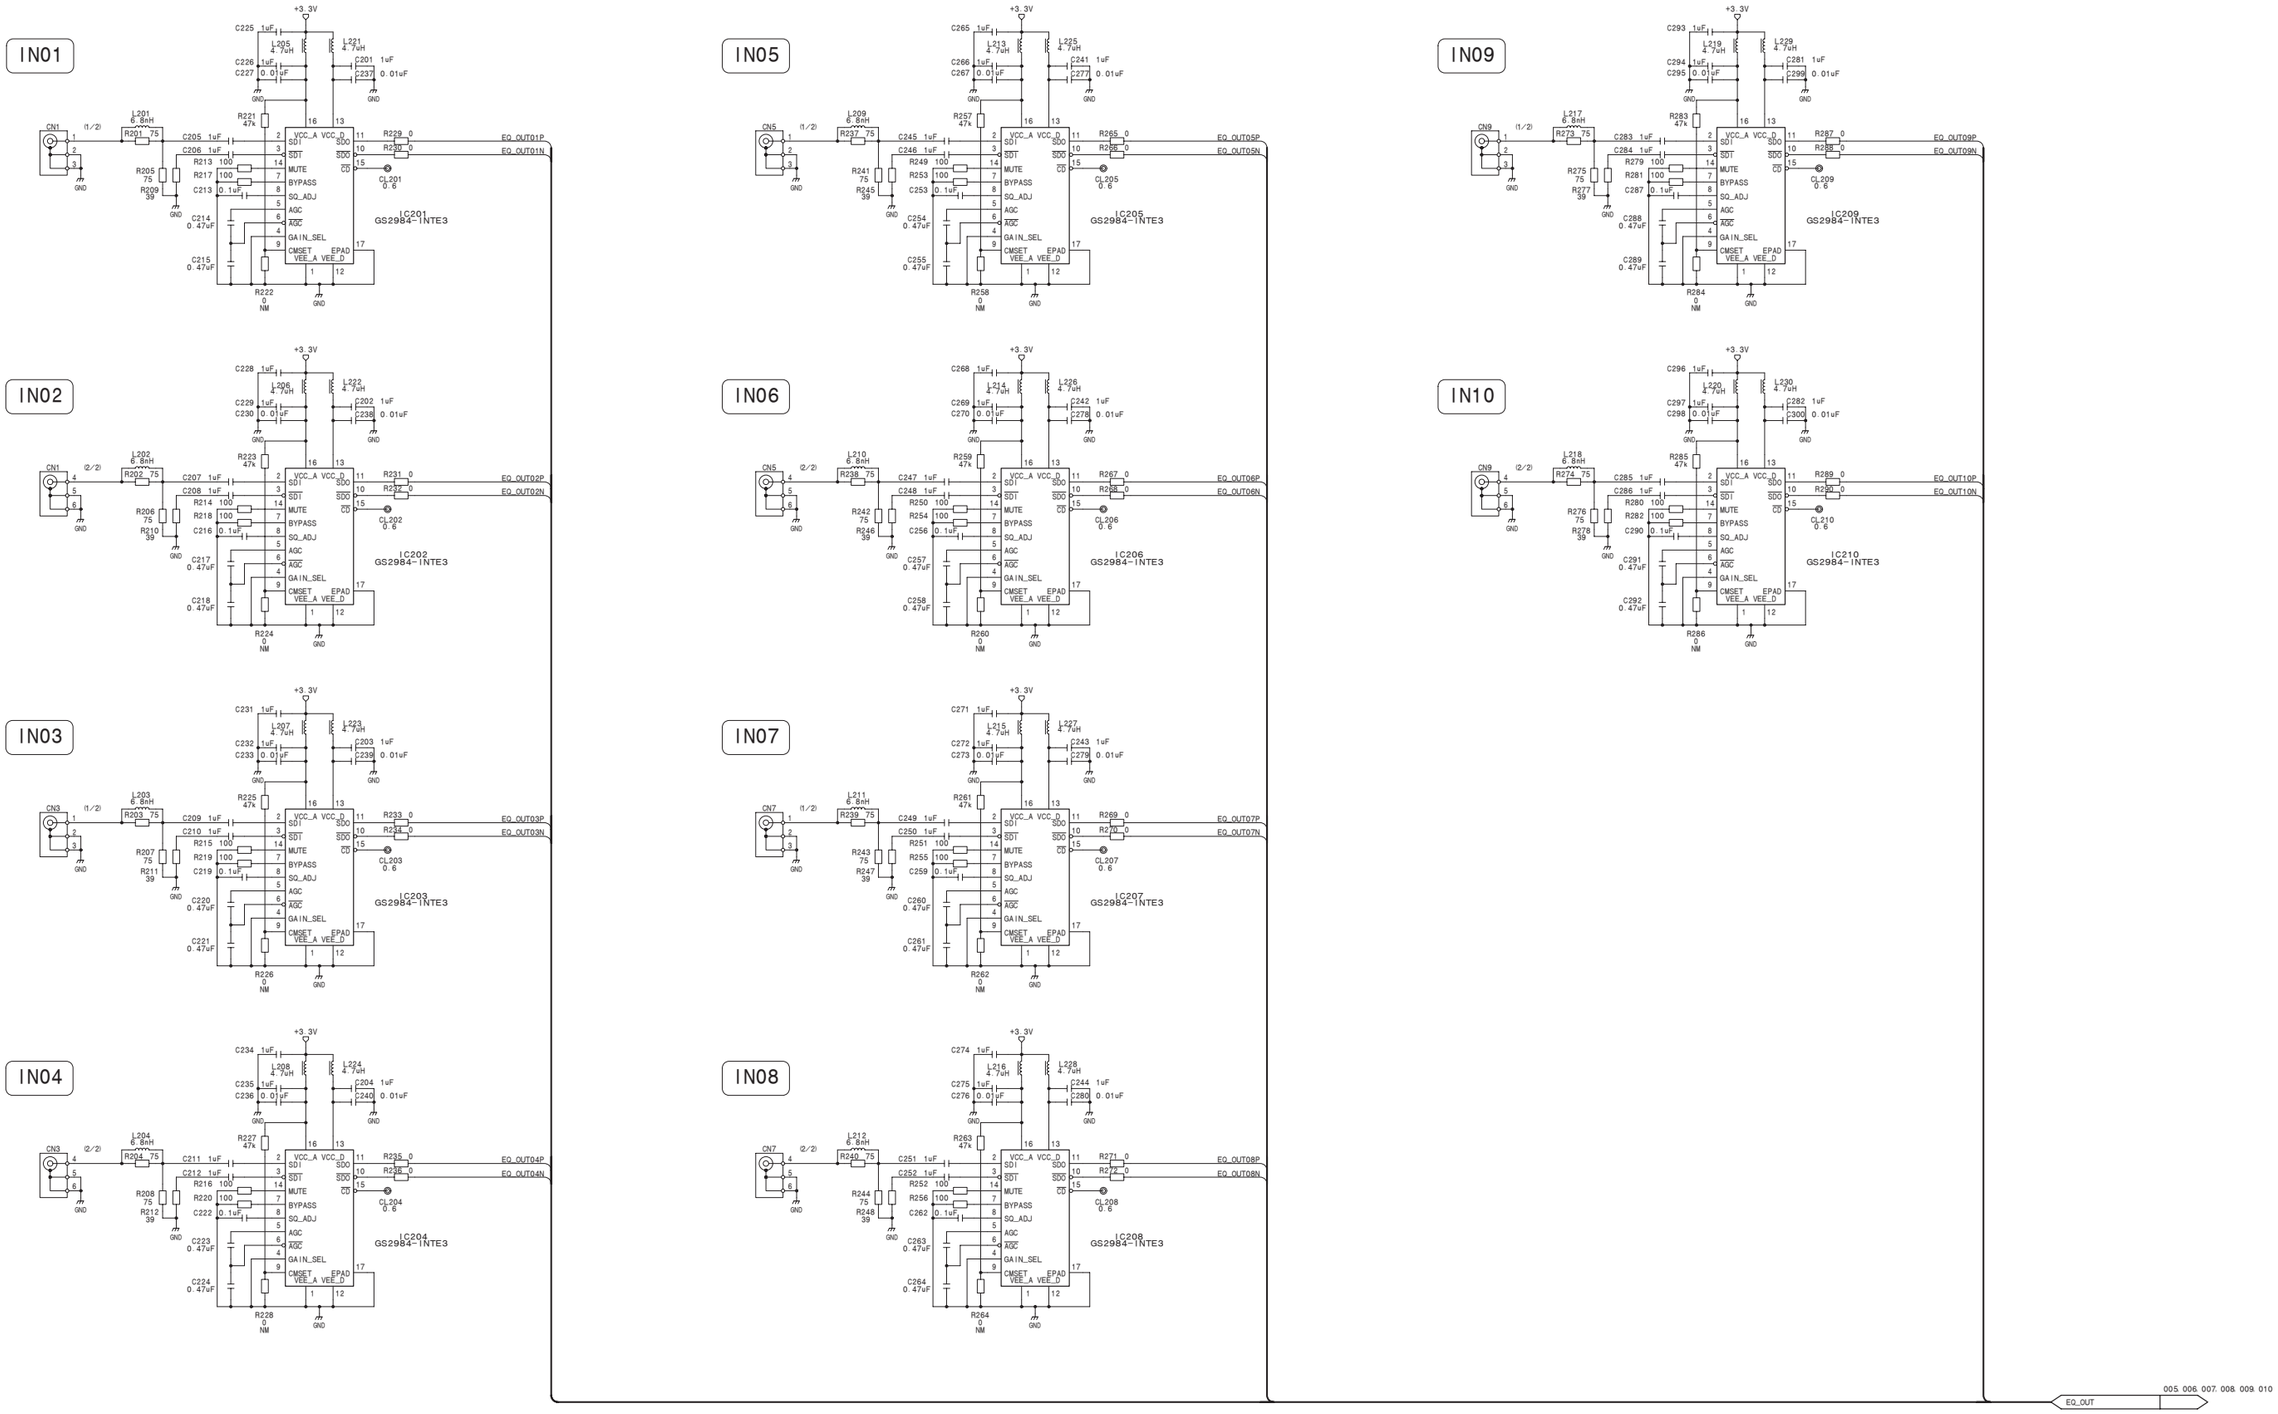

CNI-37 (4/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_4

CNI-37 (5/10)

SUFFIX: -12

CNI-37 (5/10)

SUFFIX: -12

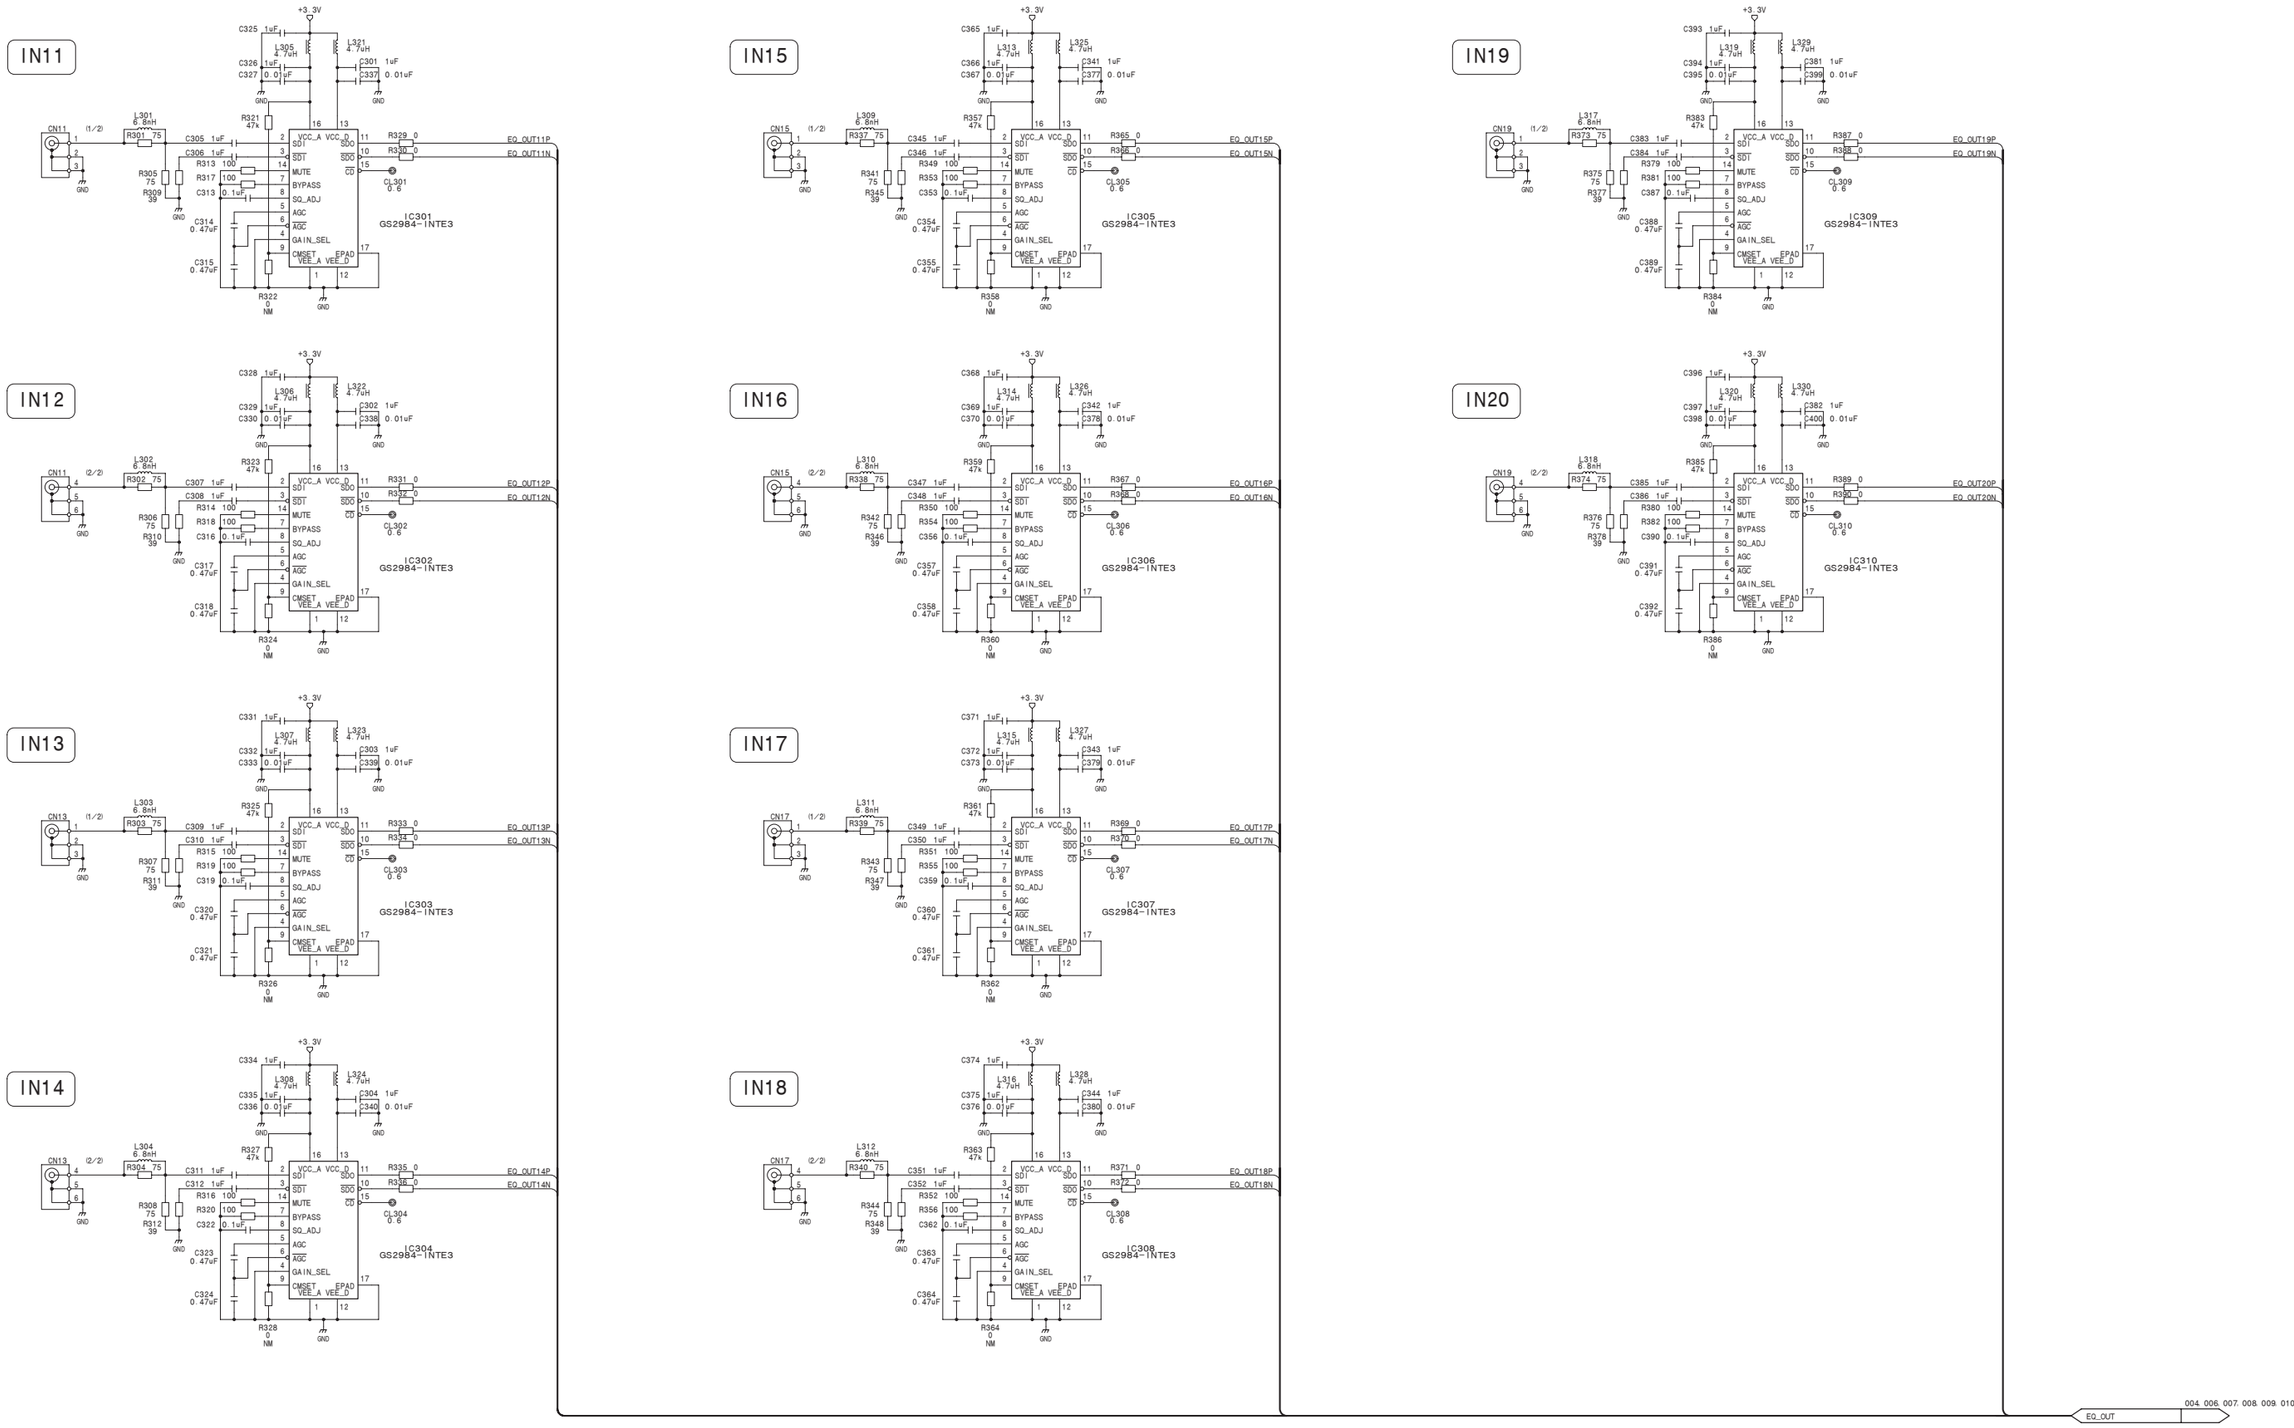

CNI-37 (5/10)

BOARD NO. 1-879-572-12

MVS-8000X_CNI-37_005_5

CNI-37 (6/10)
SUFFIX: -12

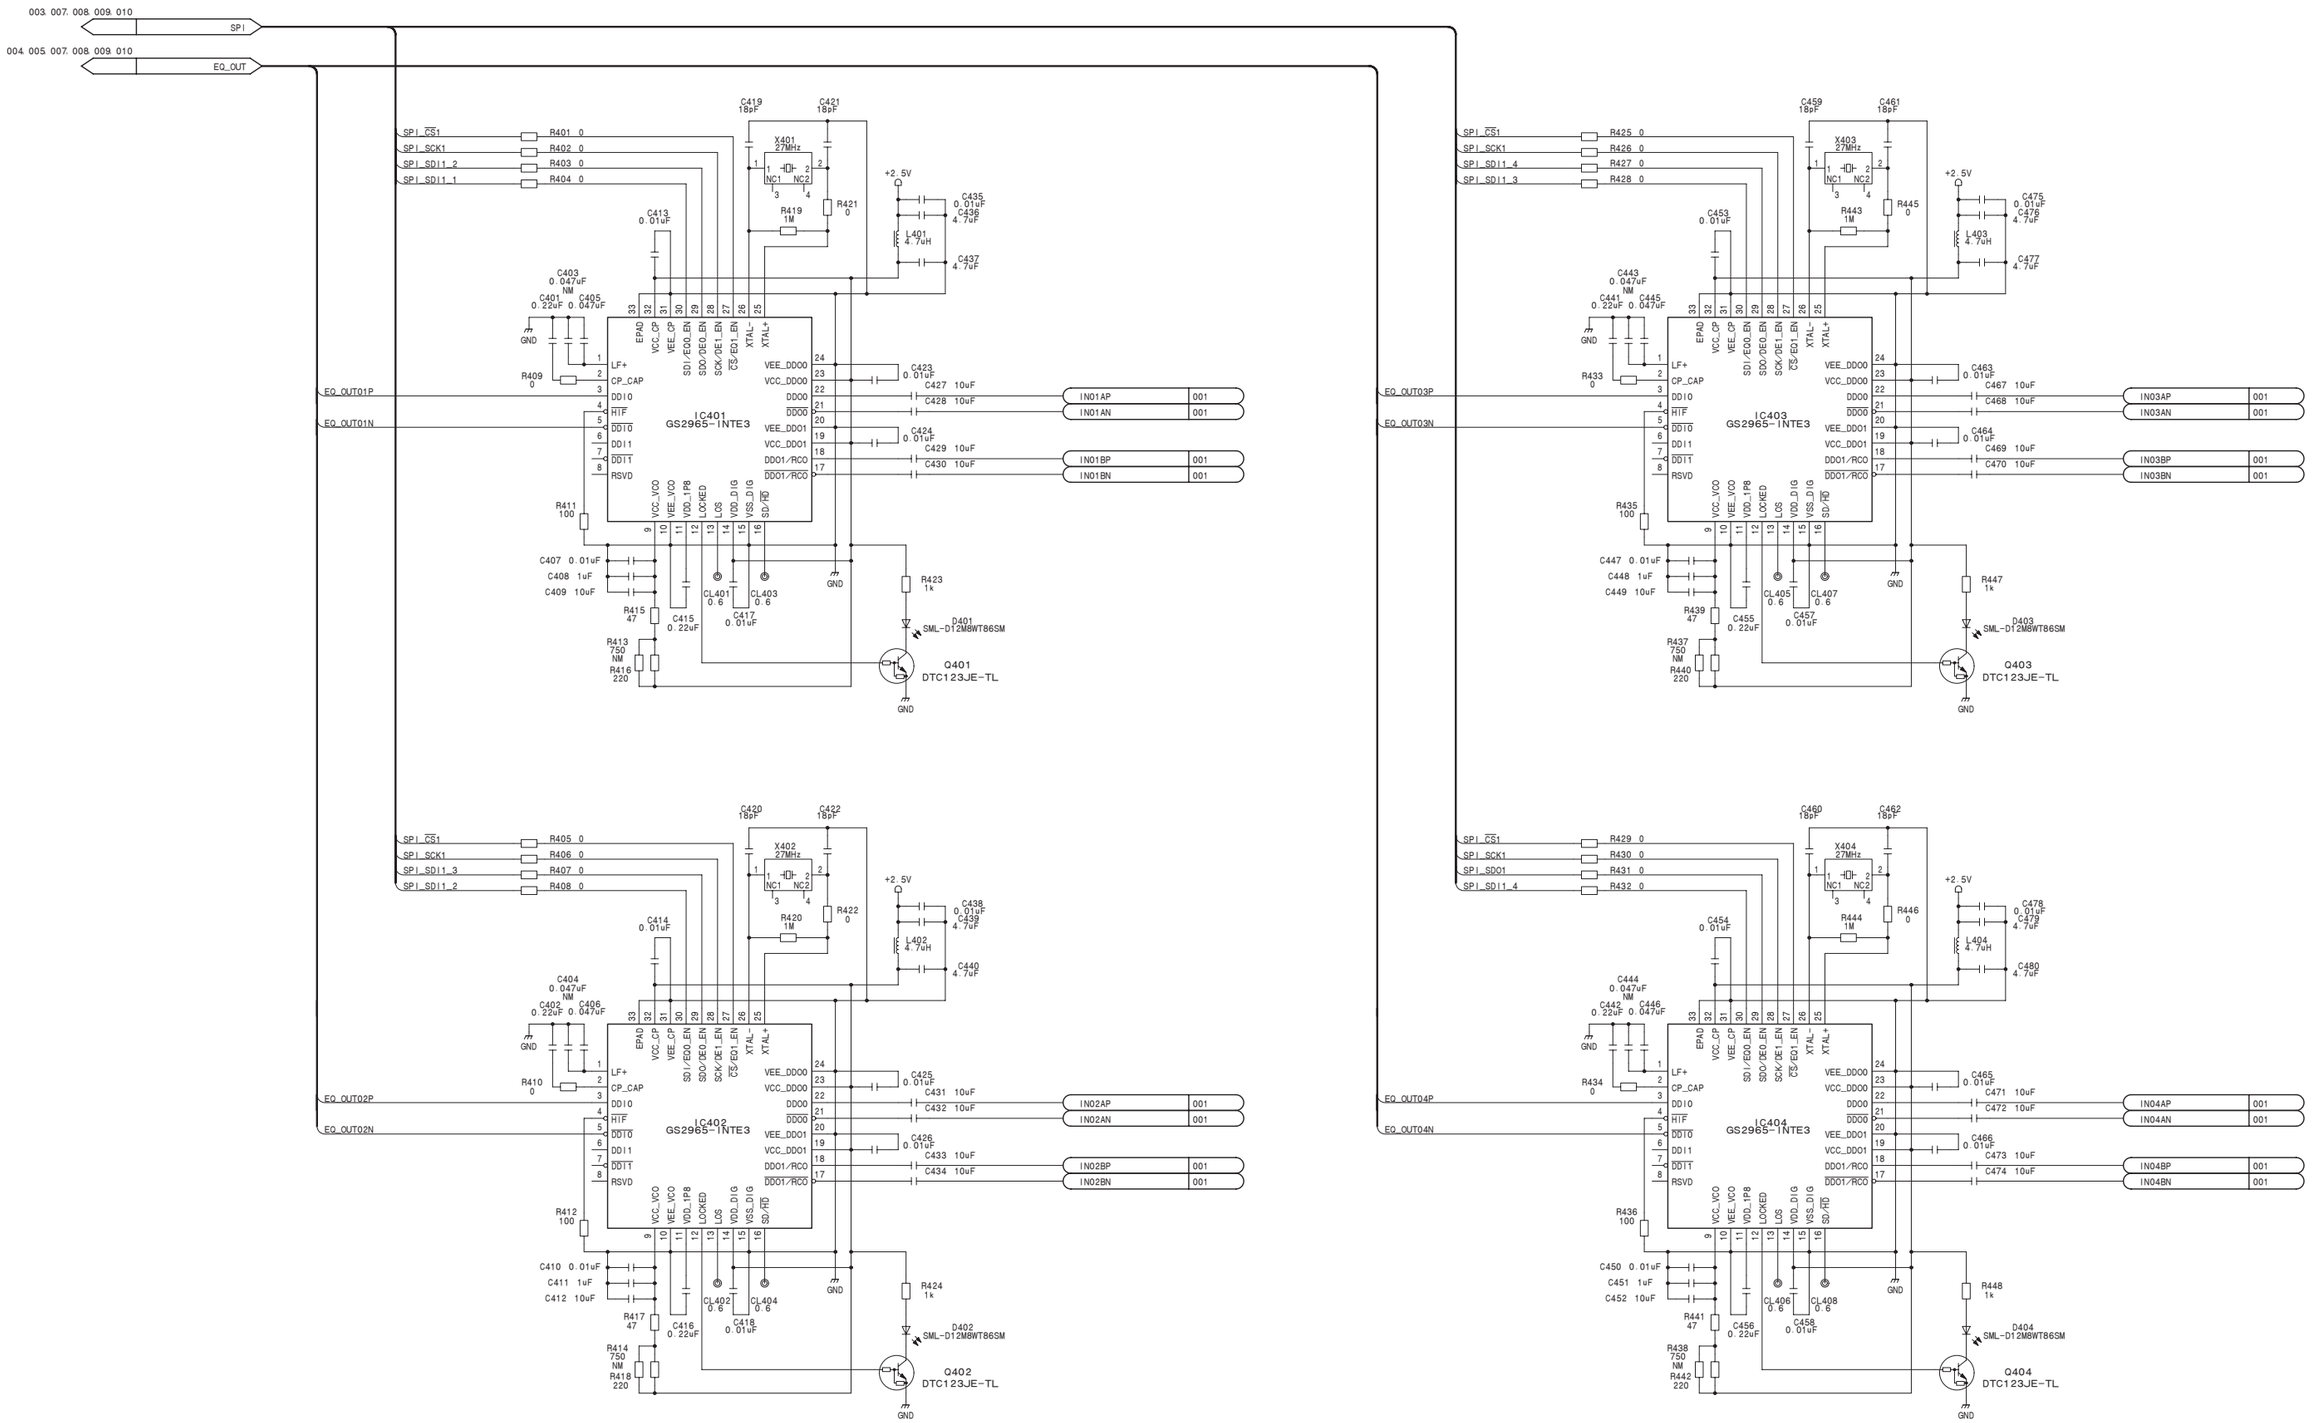

CNI-37 (6/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_6

4-104 (a)

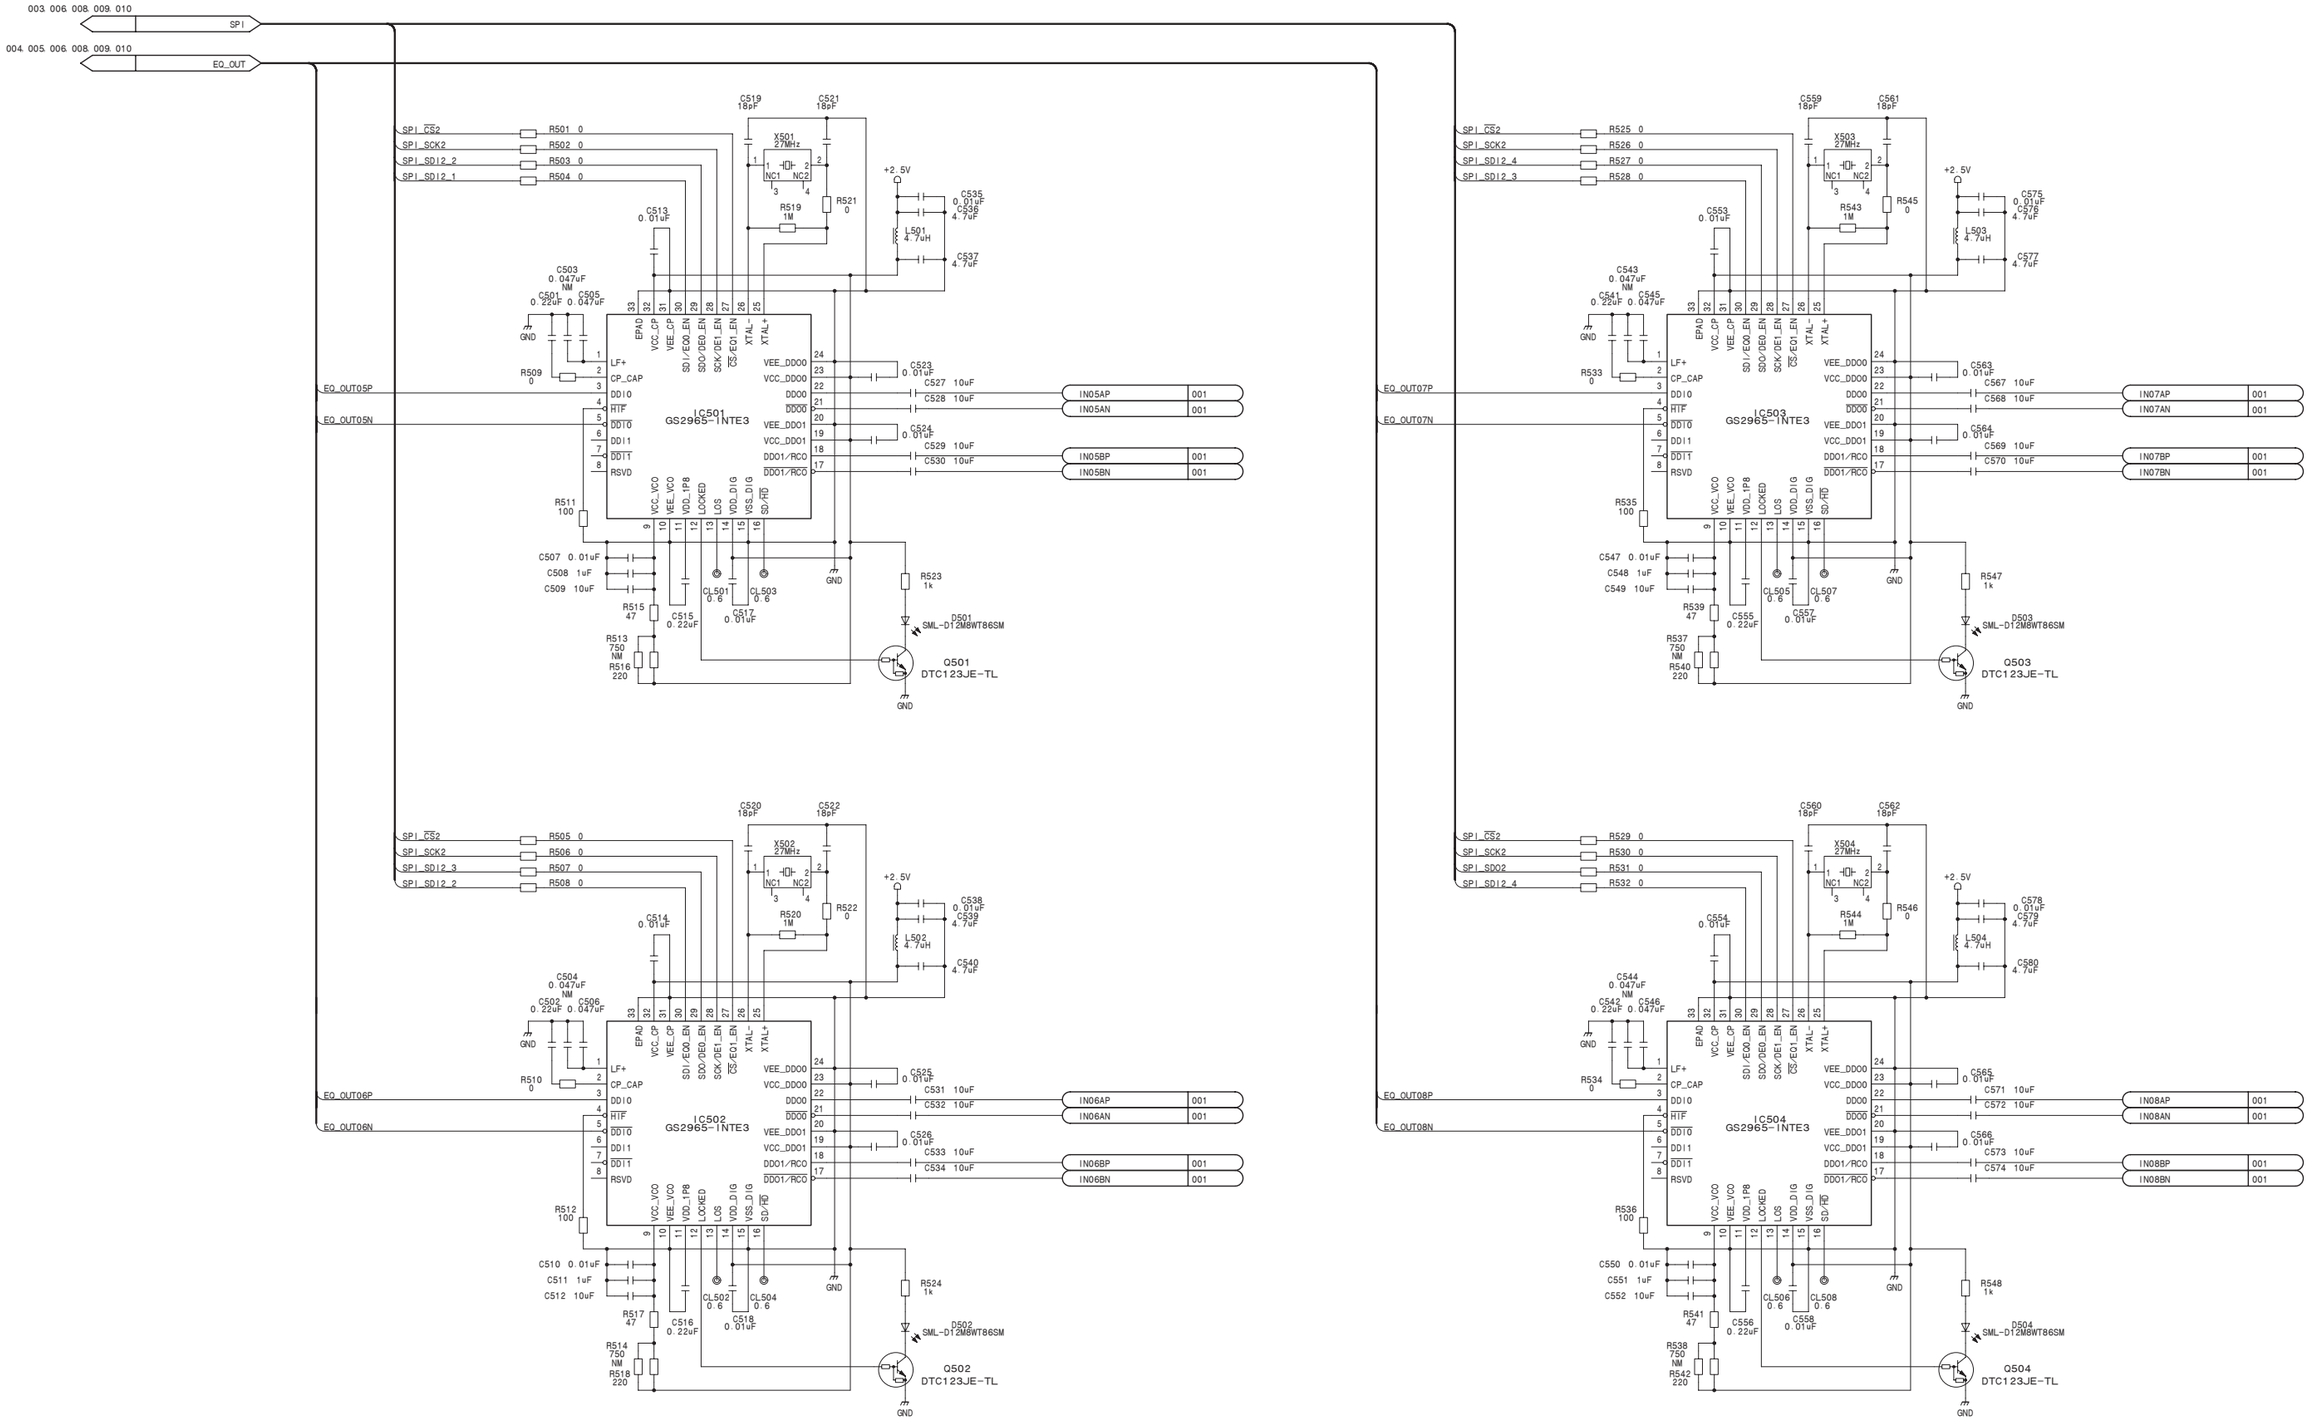

CNI-37 (7/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_7

CNI-37 (8/10)
SUFFIX: -12

CNI-37 (8/10)
SUFFIX: -12

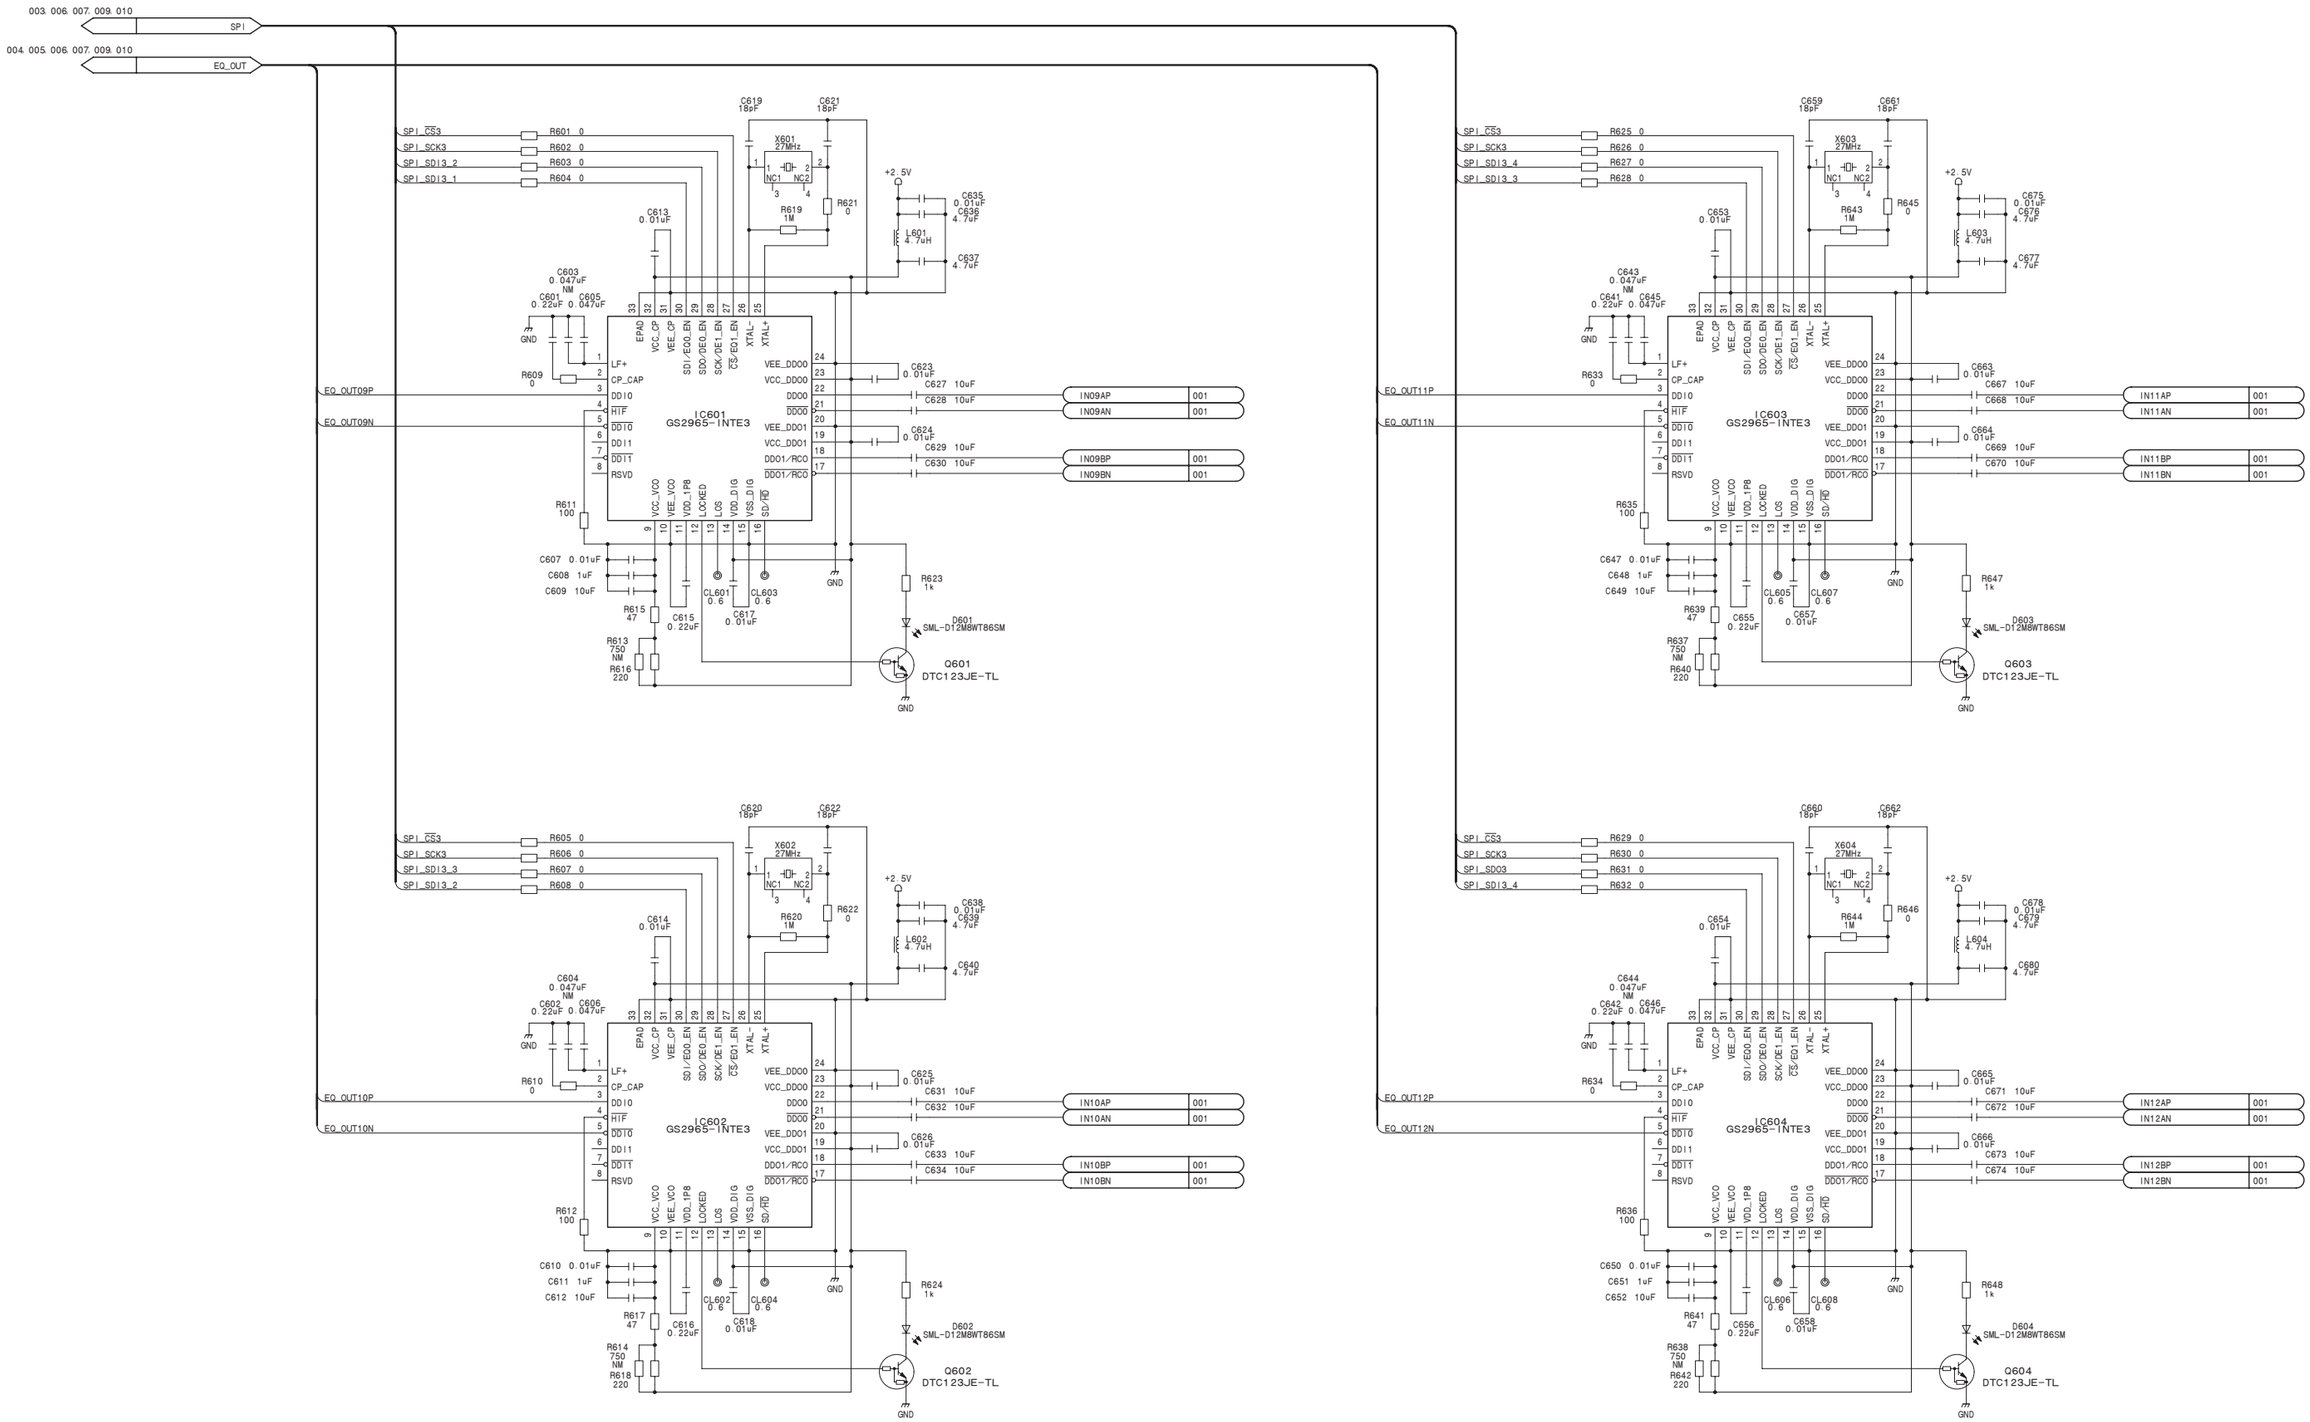

CNI-37 (8/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_8

4-106 (a)

A B C D E F G H

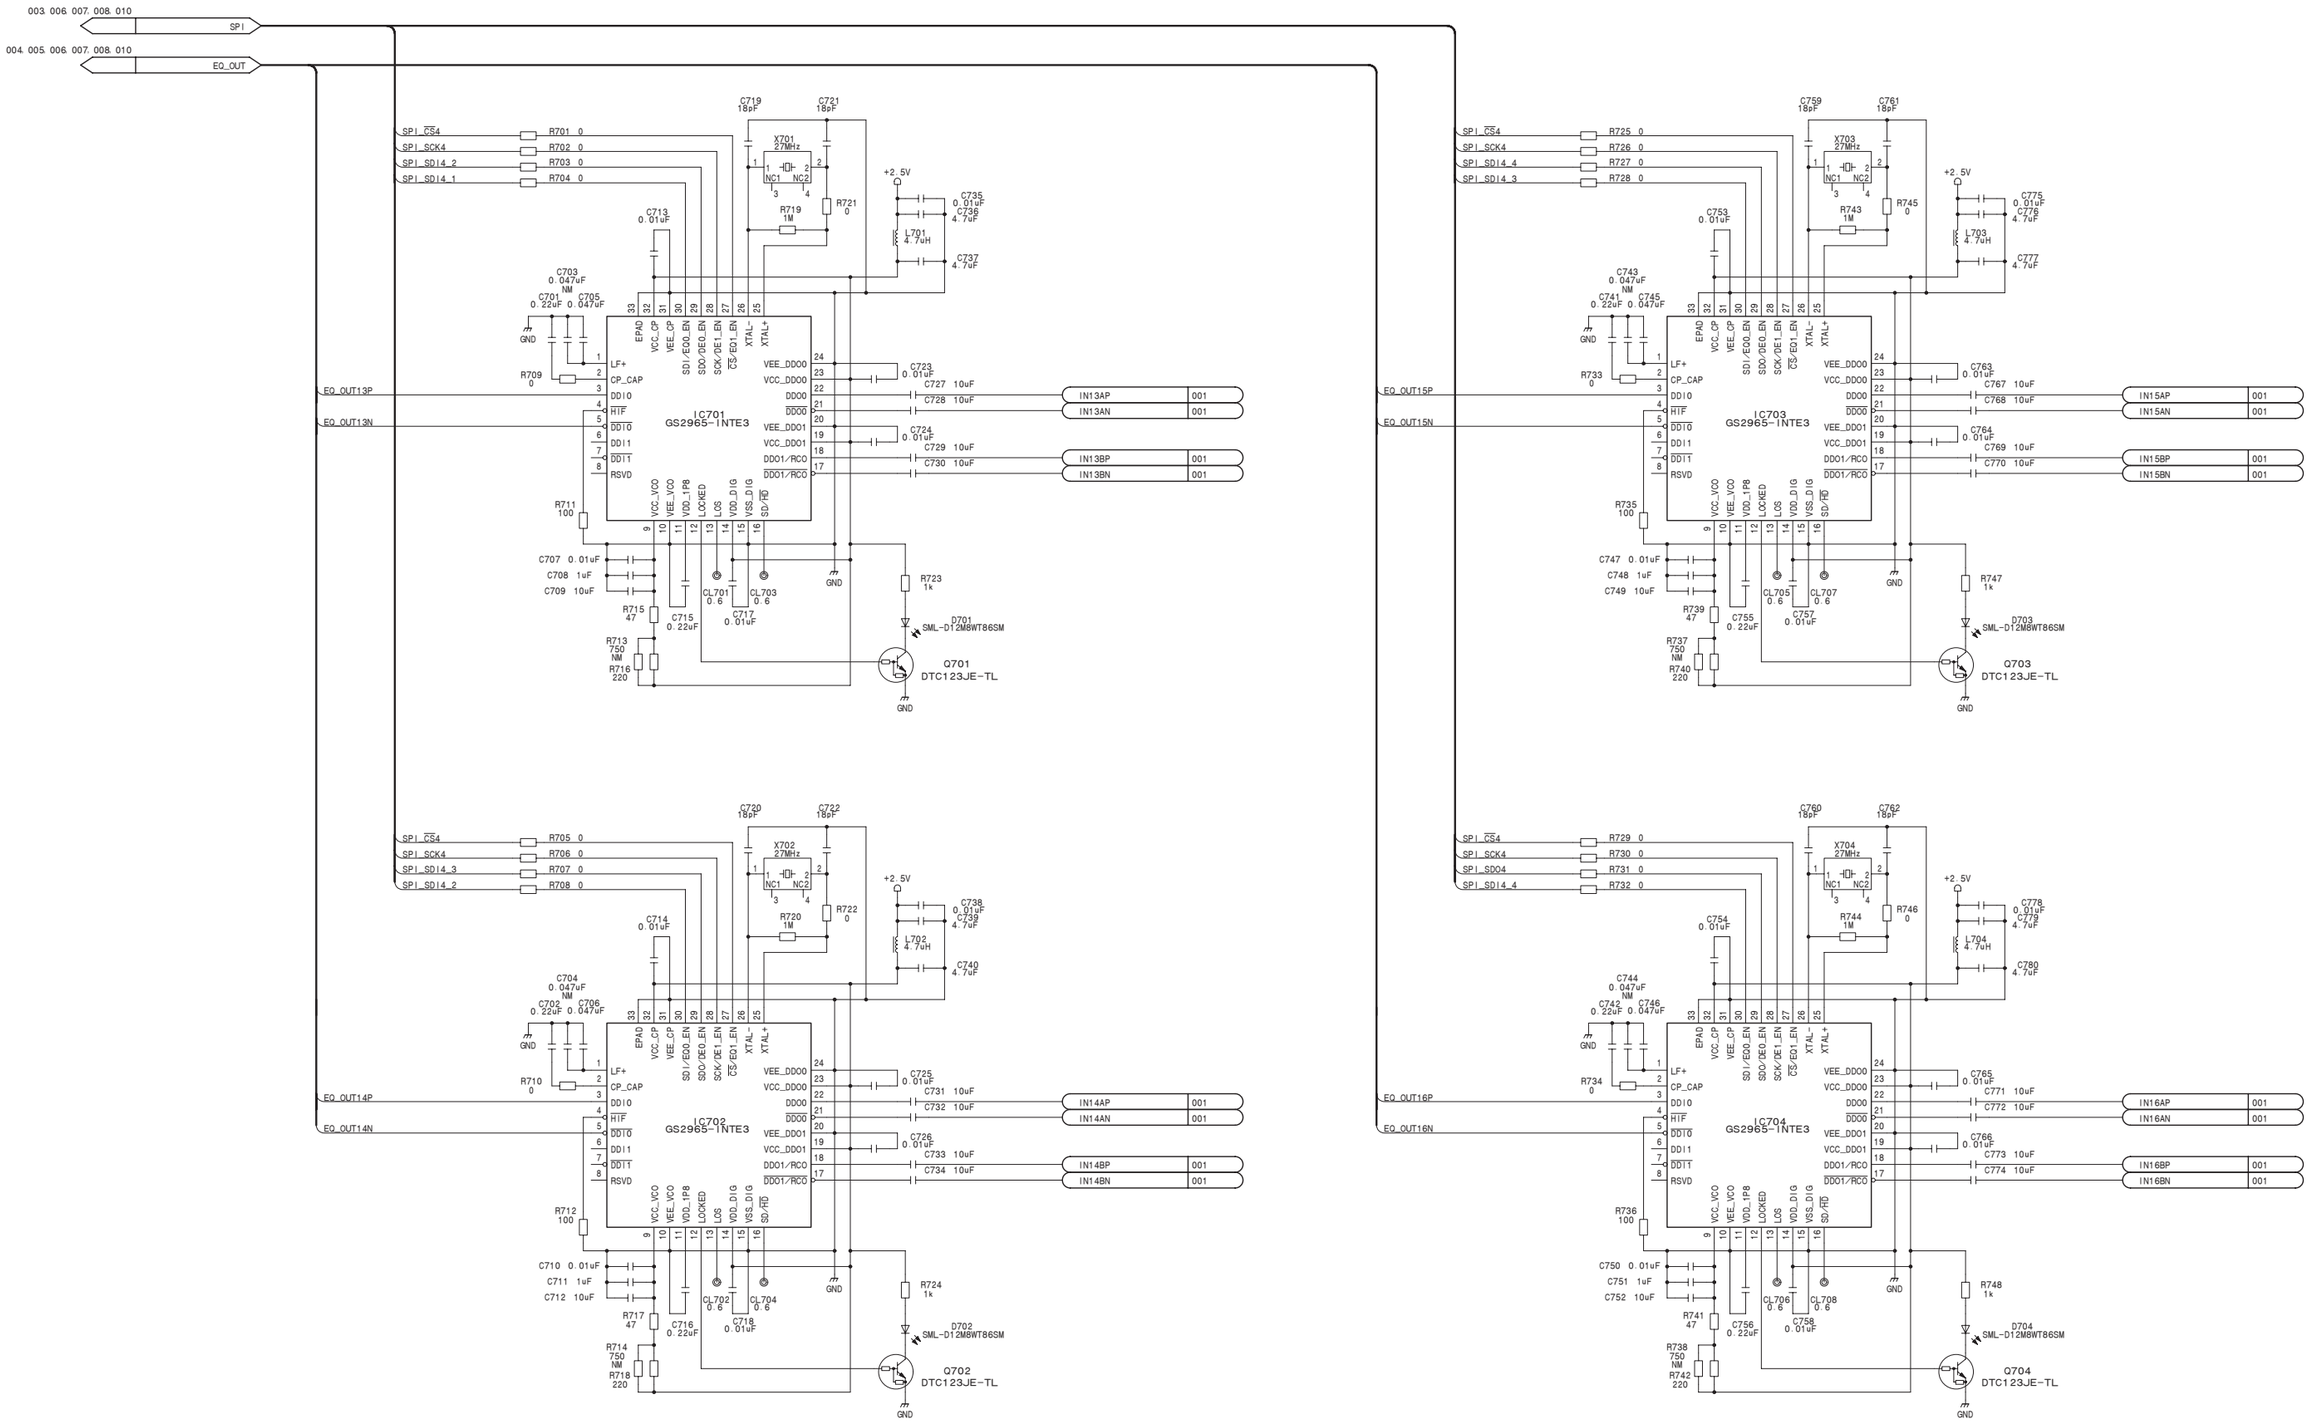

CNI-37 (9/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_9

CNI-37 (10/10) **SUFFIX: -12**

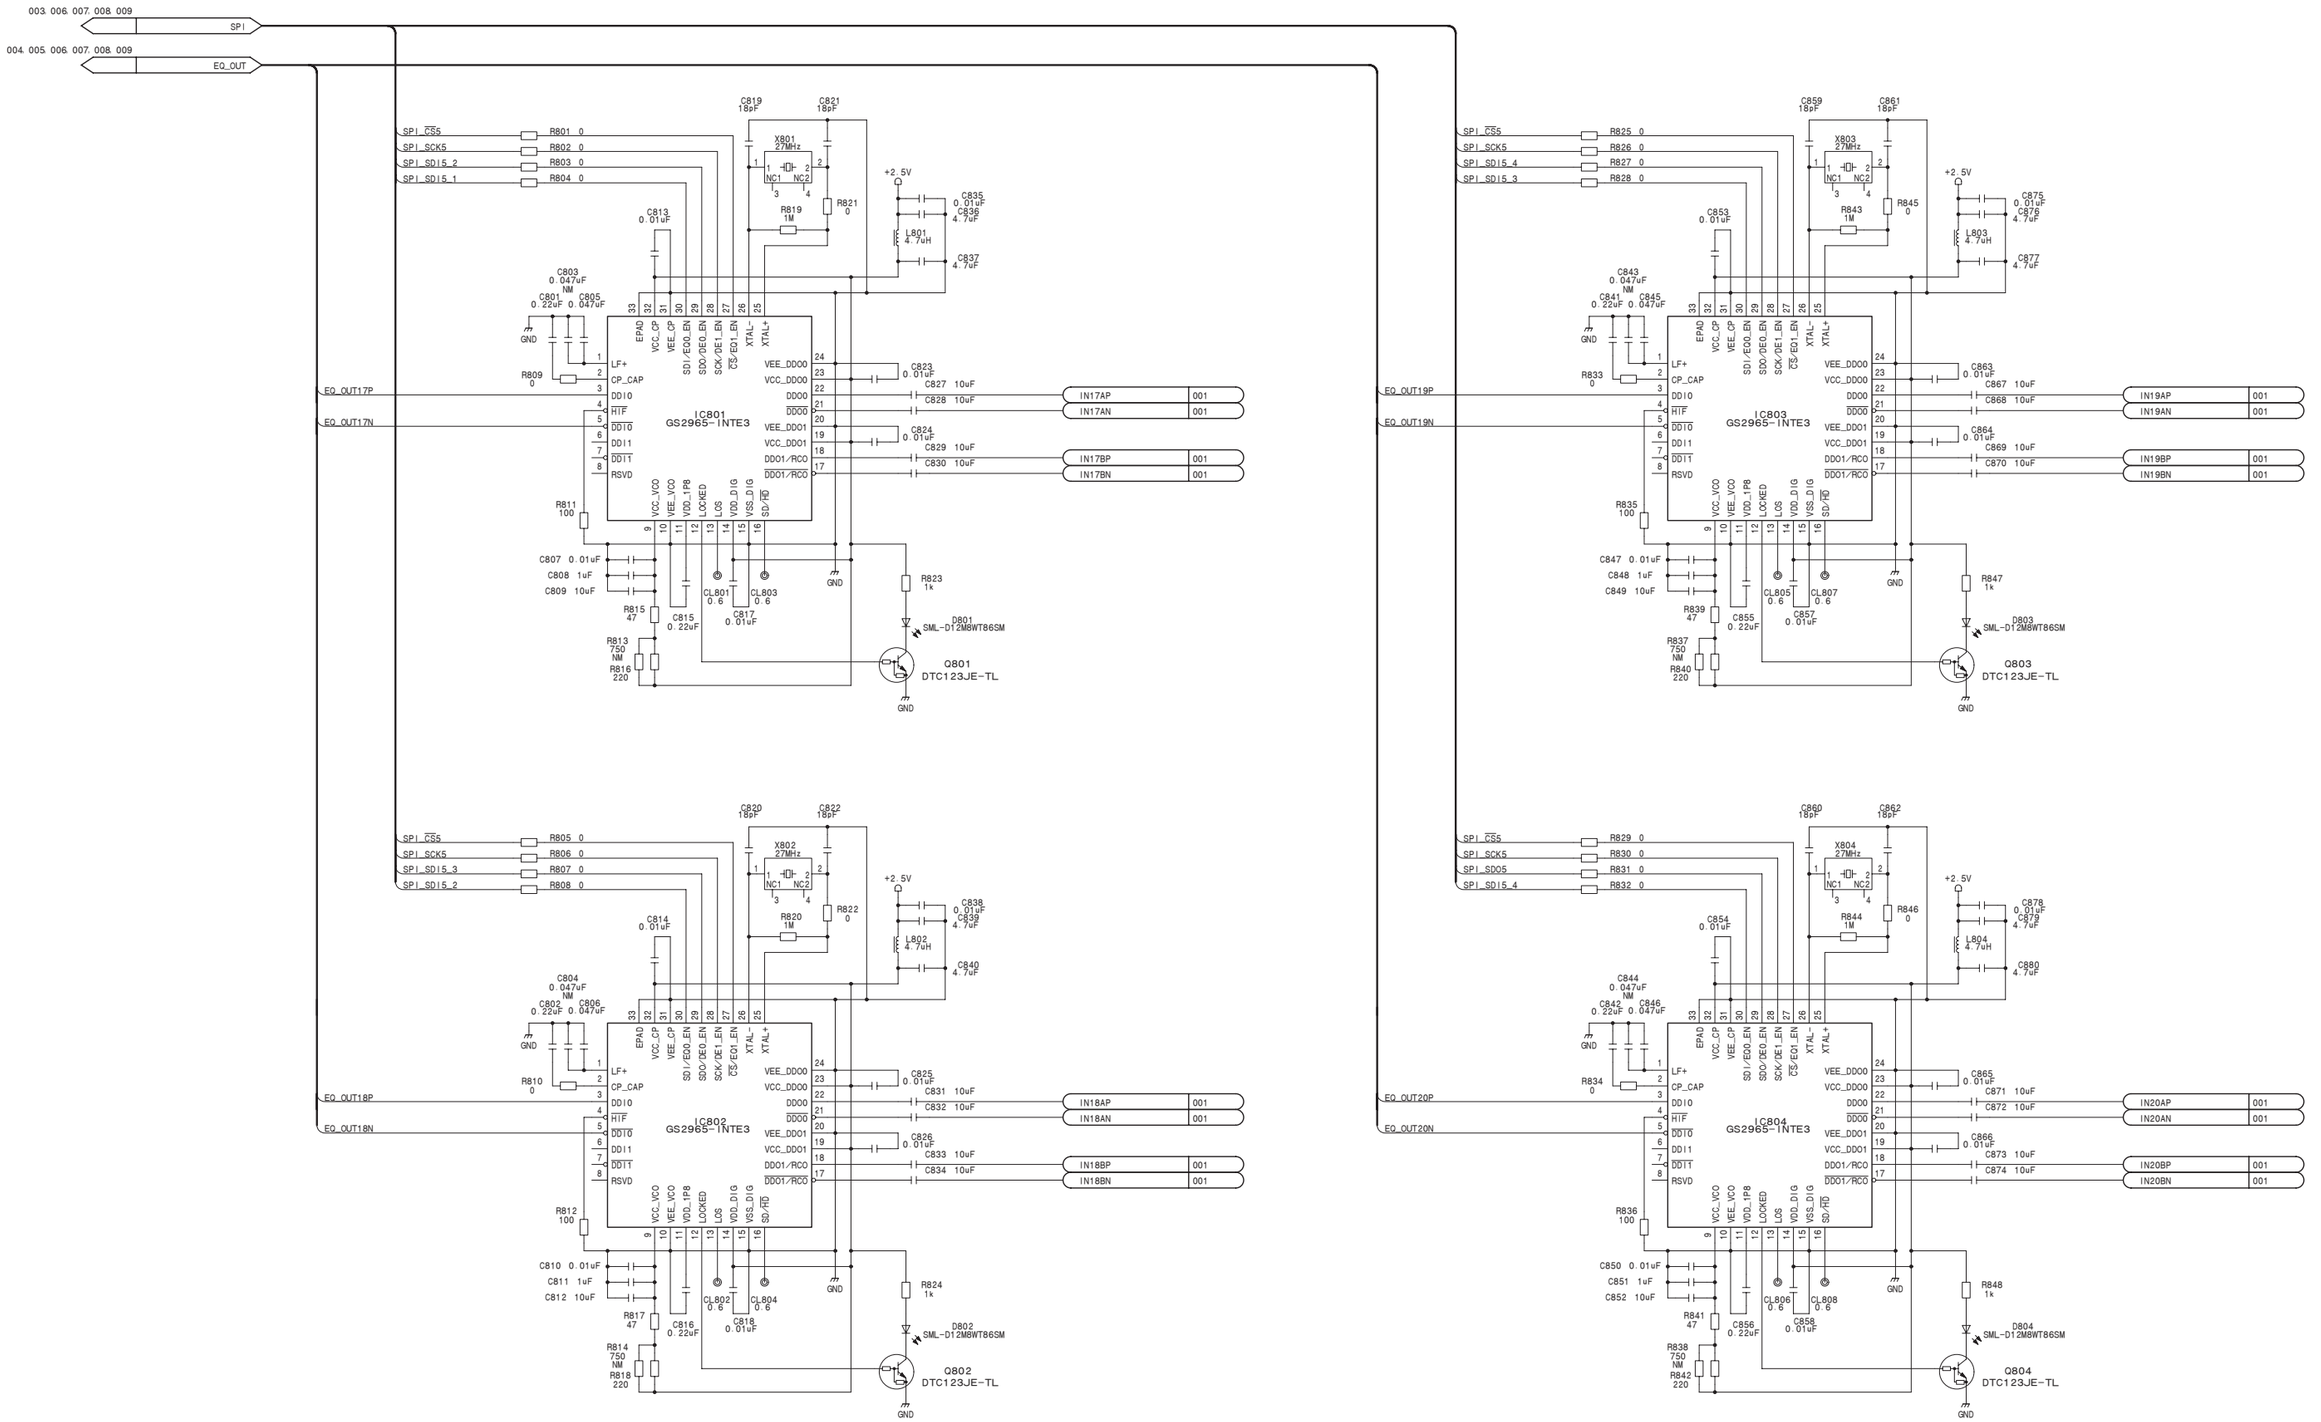

CNI-37 (10/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37_005_10

CNI-37A (1/10)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1	IN01BP	IN01BN	GND	IN01AP	IN01AN	GND
2	IN02BP	IN02BN	GND	IN02AP	IN02AN	GND
3	IN03BP	IN03BN	GND	IN03AP	IN03AN	GND
4	IN04BP	IN04BN	GND	IN04AP	IN04AN	GND
5	IN05BP	IN05BN	GND	IN05AP	IN05AN	GND
6	IN06BP	IN06BN	GND	IN06AP	IN06AN	GND
7	IN07BP	IN07BN	GND	IN07AP	IN07AN	GND
8	IN08BP	IN08BN	GND	IN08AP	IN08AN	GND
9	IN09BP	IN09BN	GND	IN09AP	IN09AN	GND
10	IN10BP	IN10BN	GND	IN10AP	IN10AN	GND

CNF1

	A	B	BG	C	D	DG
1	IN11BP	IN11BN	GND	IN11AP	IN11AN	GND
2	IN12BP	IN12BN	GND	IN12AP	IN12AN	GND
3	IN13BP	IN13BN	GND	IN13AP	IN13AN	GND
4	IN14BP	IN14BN	GND	IN14AP	IN14AN	GND
5	IN15BP	IN15BN	GND	IN15AP	IN15AN	GND
6	IN16BP	IN16BN	GND	IN16AP	IN16AN	GND
7	IN17BP	IN17BN	GND	IN17AP	IN17AN	GND
8	IN18BP	IN18BN	GND	IN18AP	IN18AN	GND
9	IN19BP	IN19BN	GND	IN19AP	IN19AN	GND
10	IN20BP	IN20BN	GND	IN20AP	IN20AN	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	SLOT_No4	SLOT_No5	GND	SLOT_No6	SLOT_No7	GND
4	SLOT_No0	SLOT_No1	GND	SLOT_No2	SLOT_No3	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	I2C_SCL	I2C_SDA	GND
6	RESET	(DC_ENBL)	GND	X/XSF	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNI-37A (1/10)

BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_1

4-109

1 2 3 4 5

A B C D E F G H

CNI-37A (2/10)
SUFFIX: -11

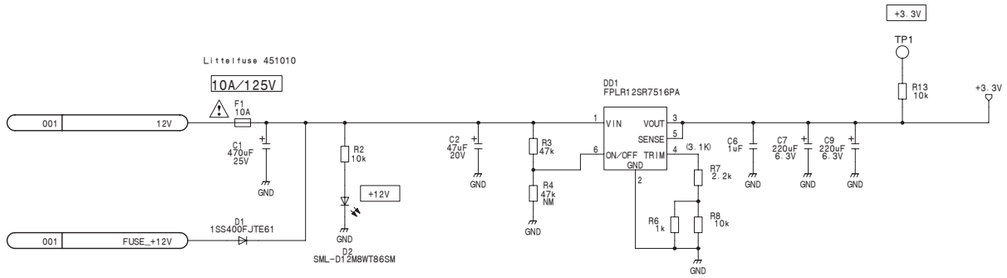



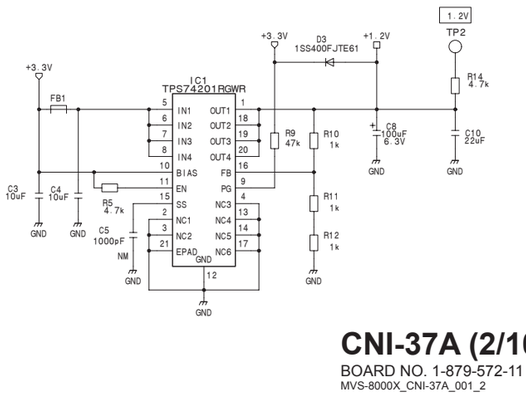



4-110

CNI-37A (2/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_2

CNI-37A (3/10)
SUFFIX: -11

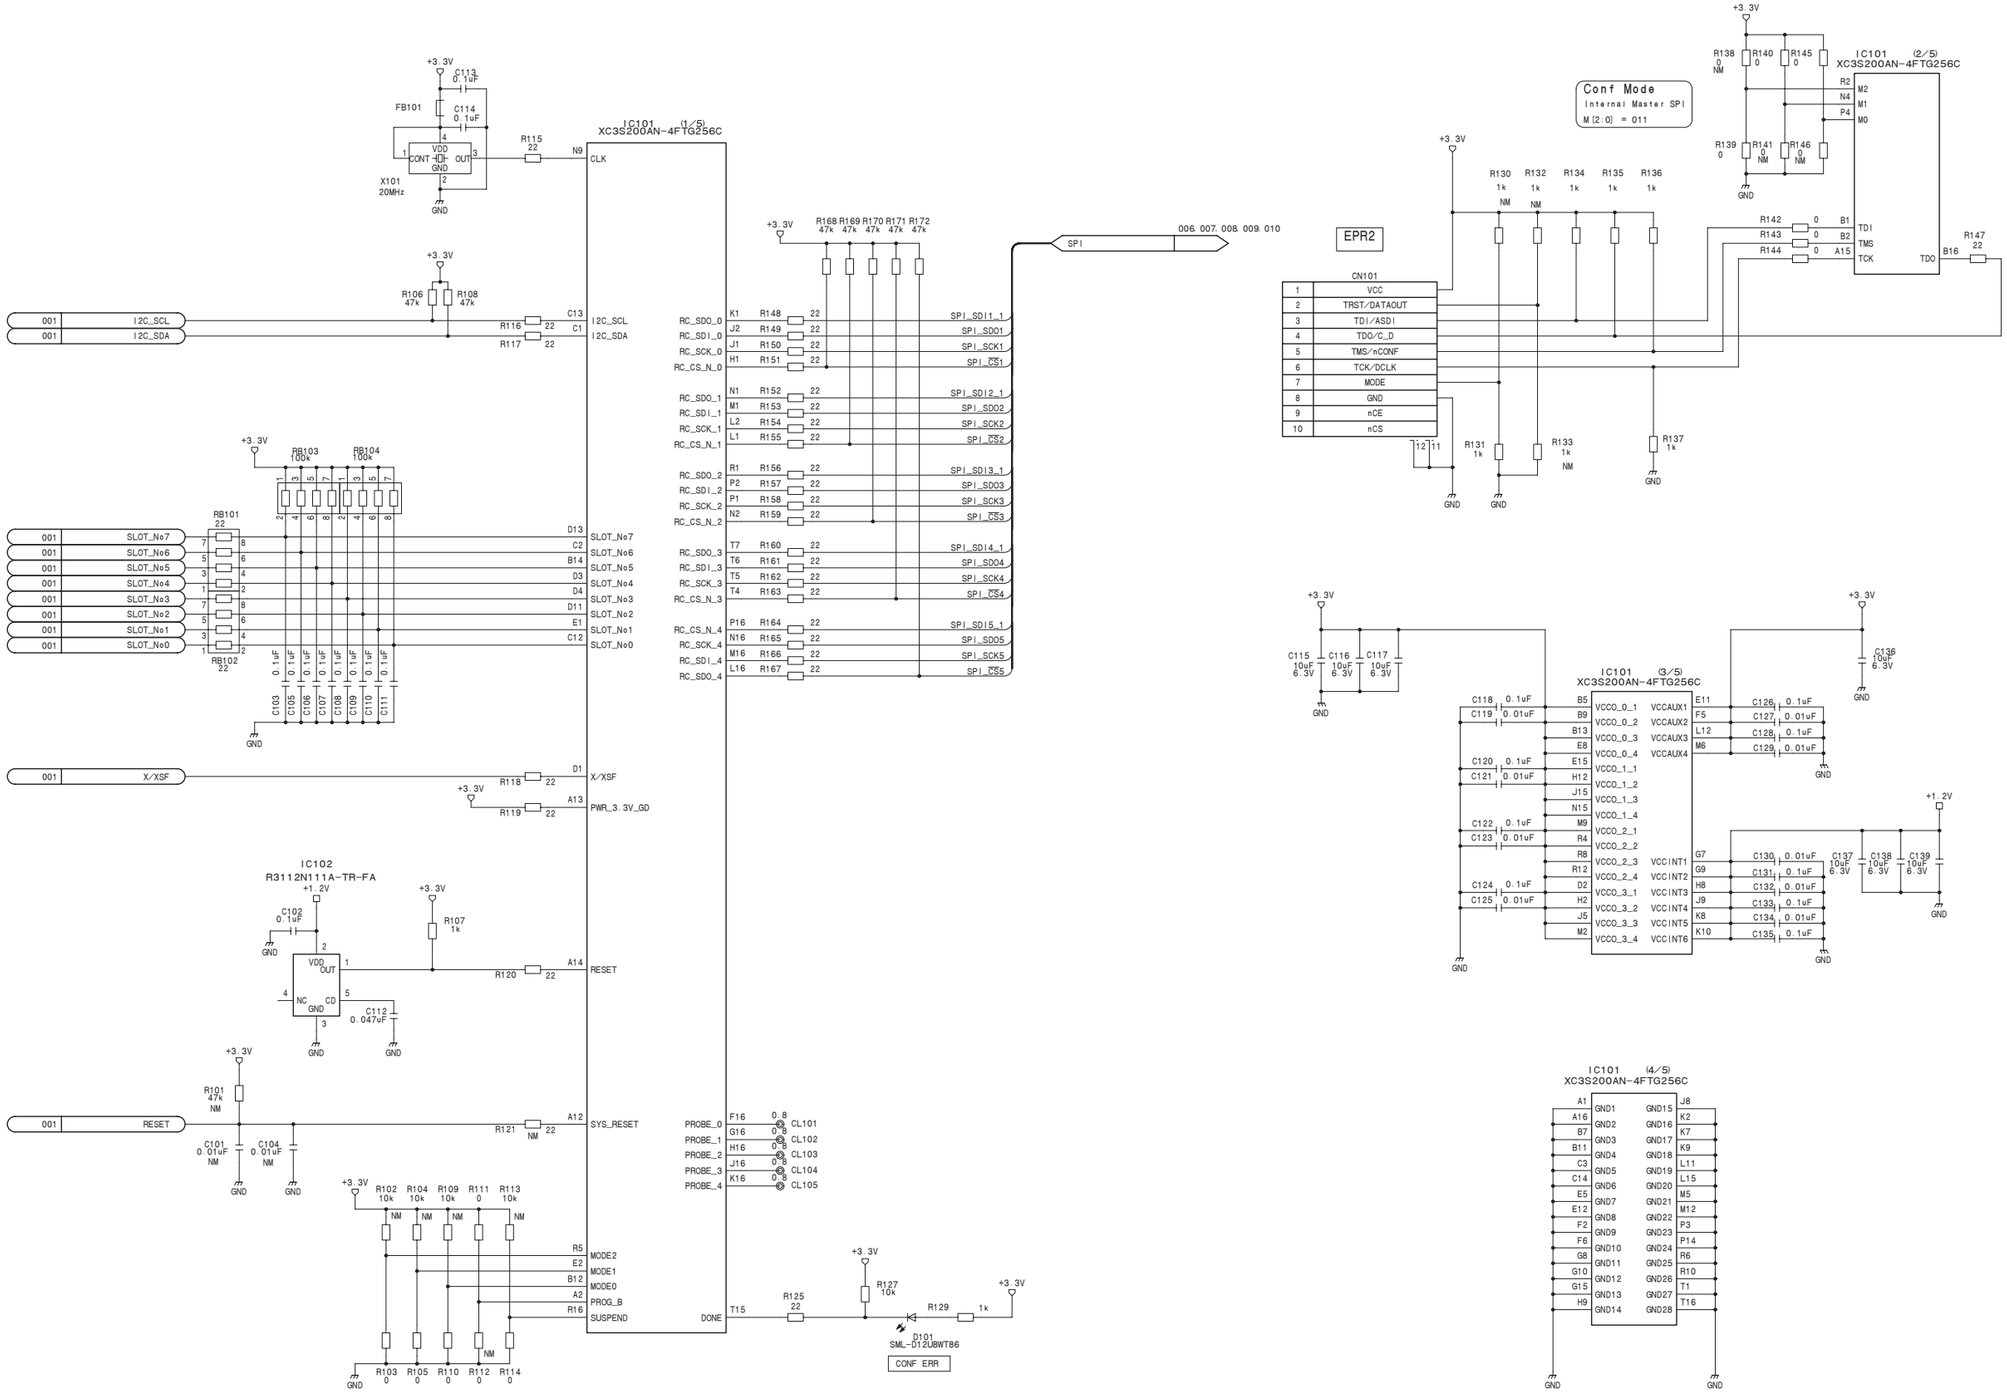

MVS-8000X/7000X

4-111

CNI-37A (3/10)

BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_3

CNI-37A (4/10)
SUFFIX: -11

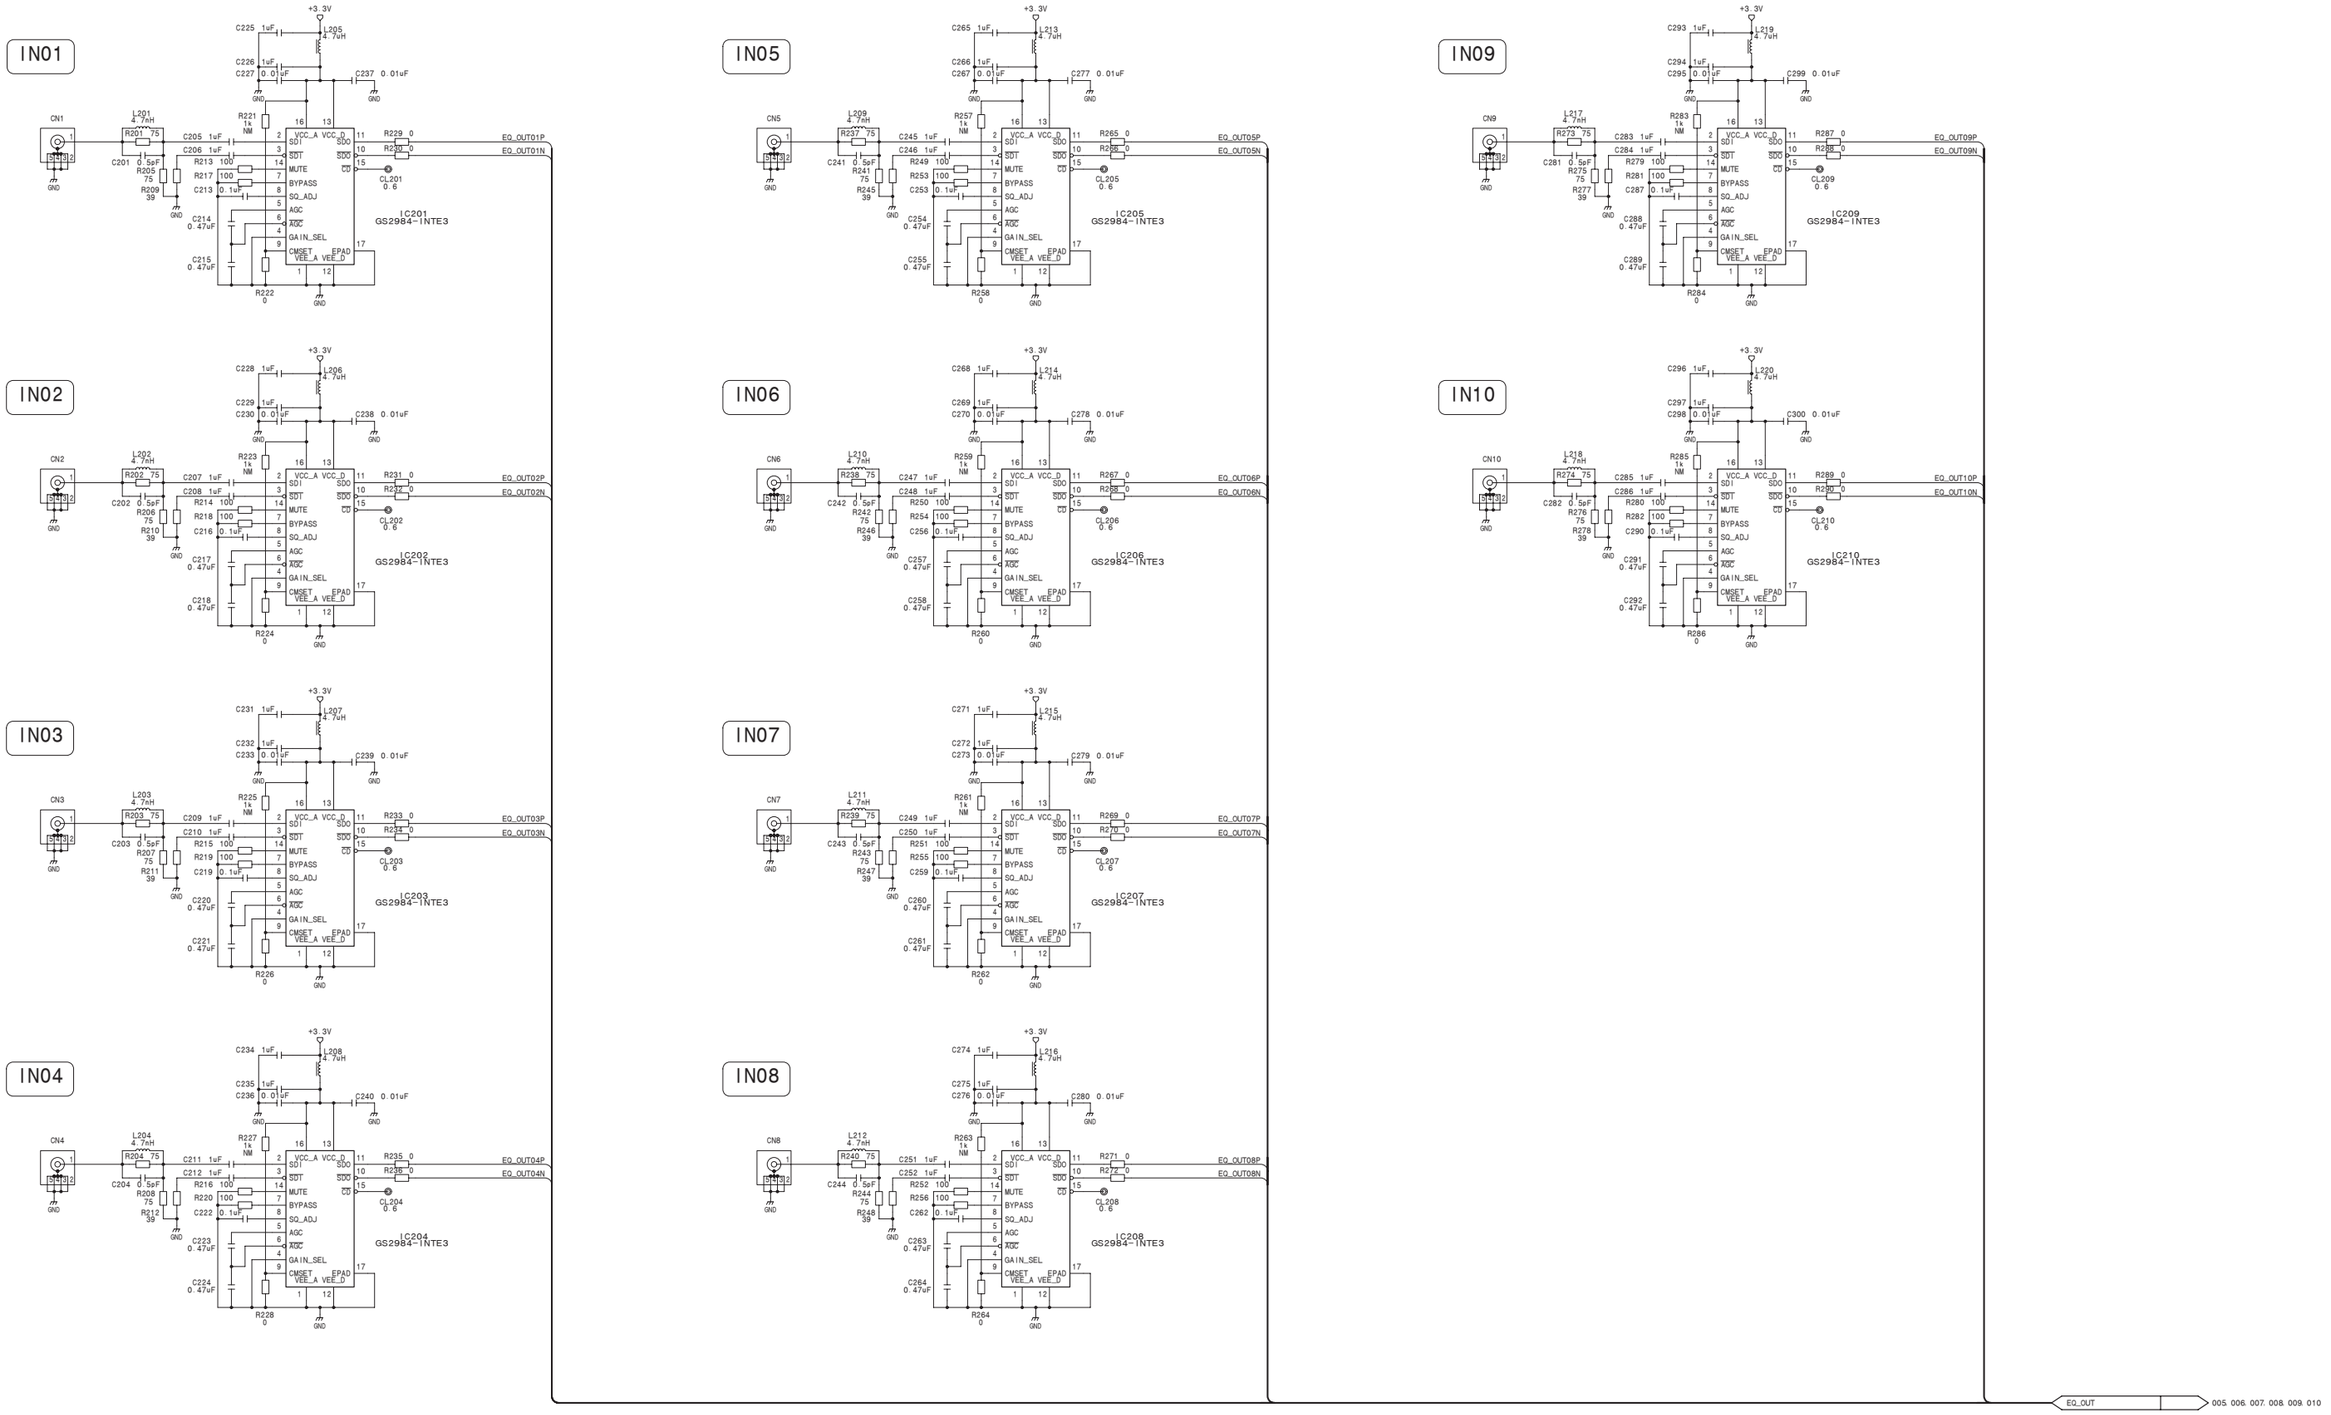

CNI-37A (4/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_4

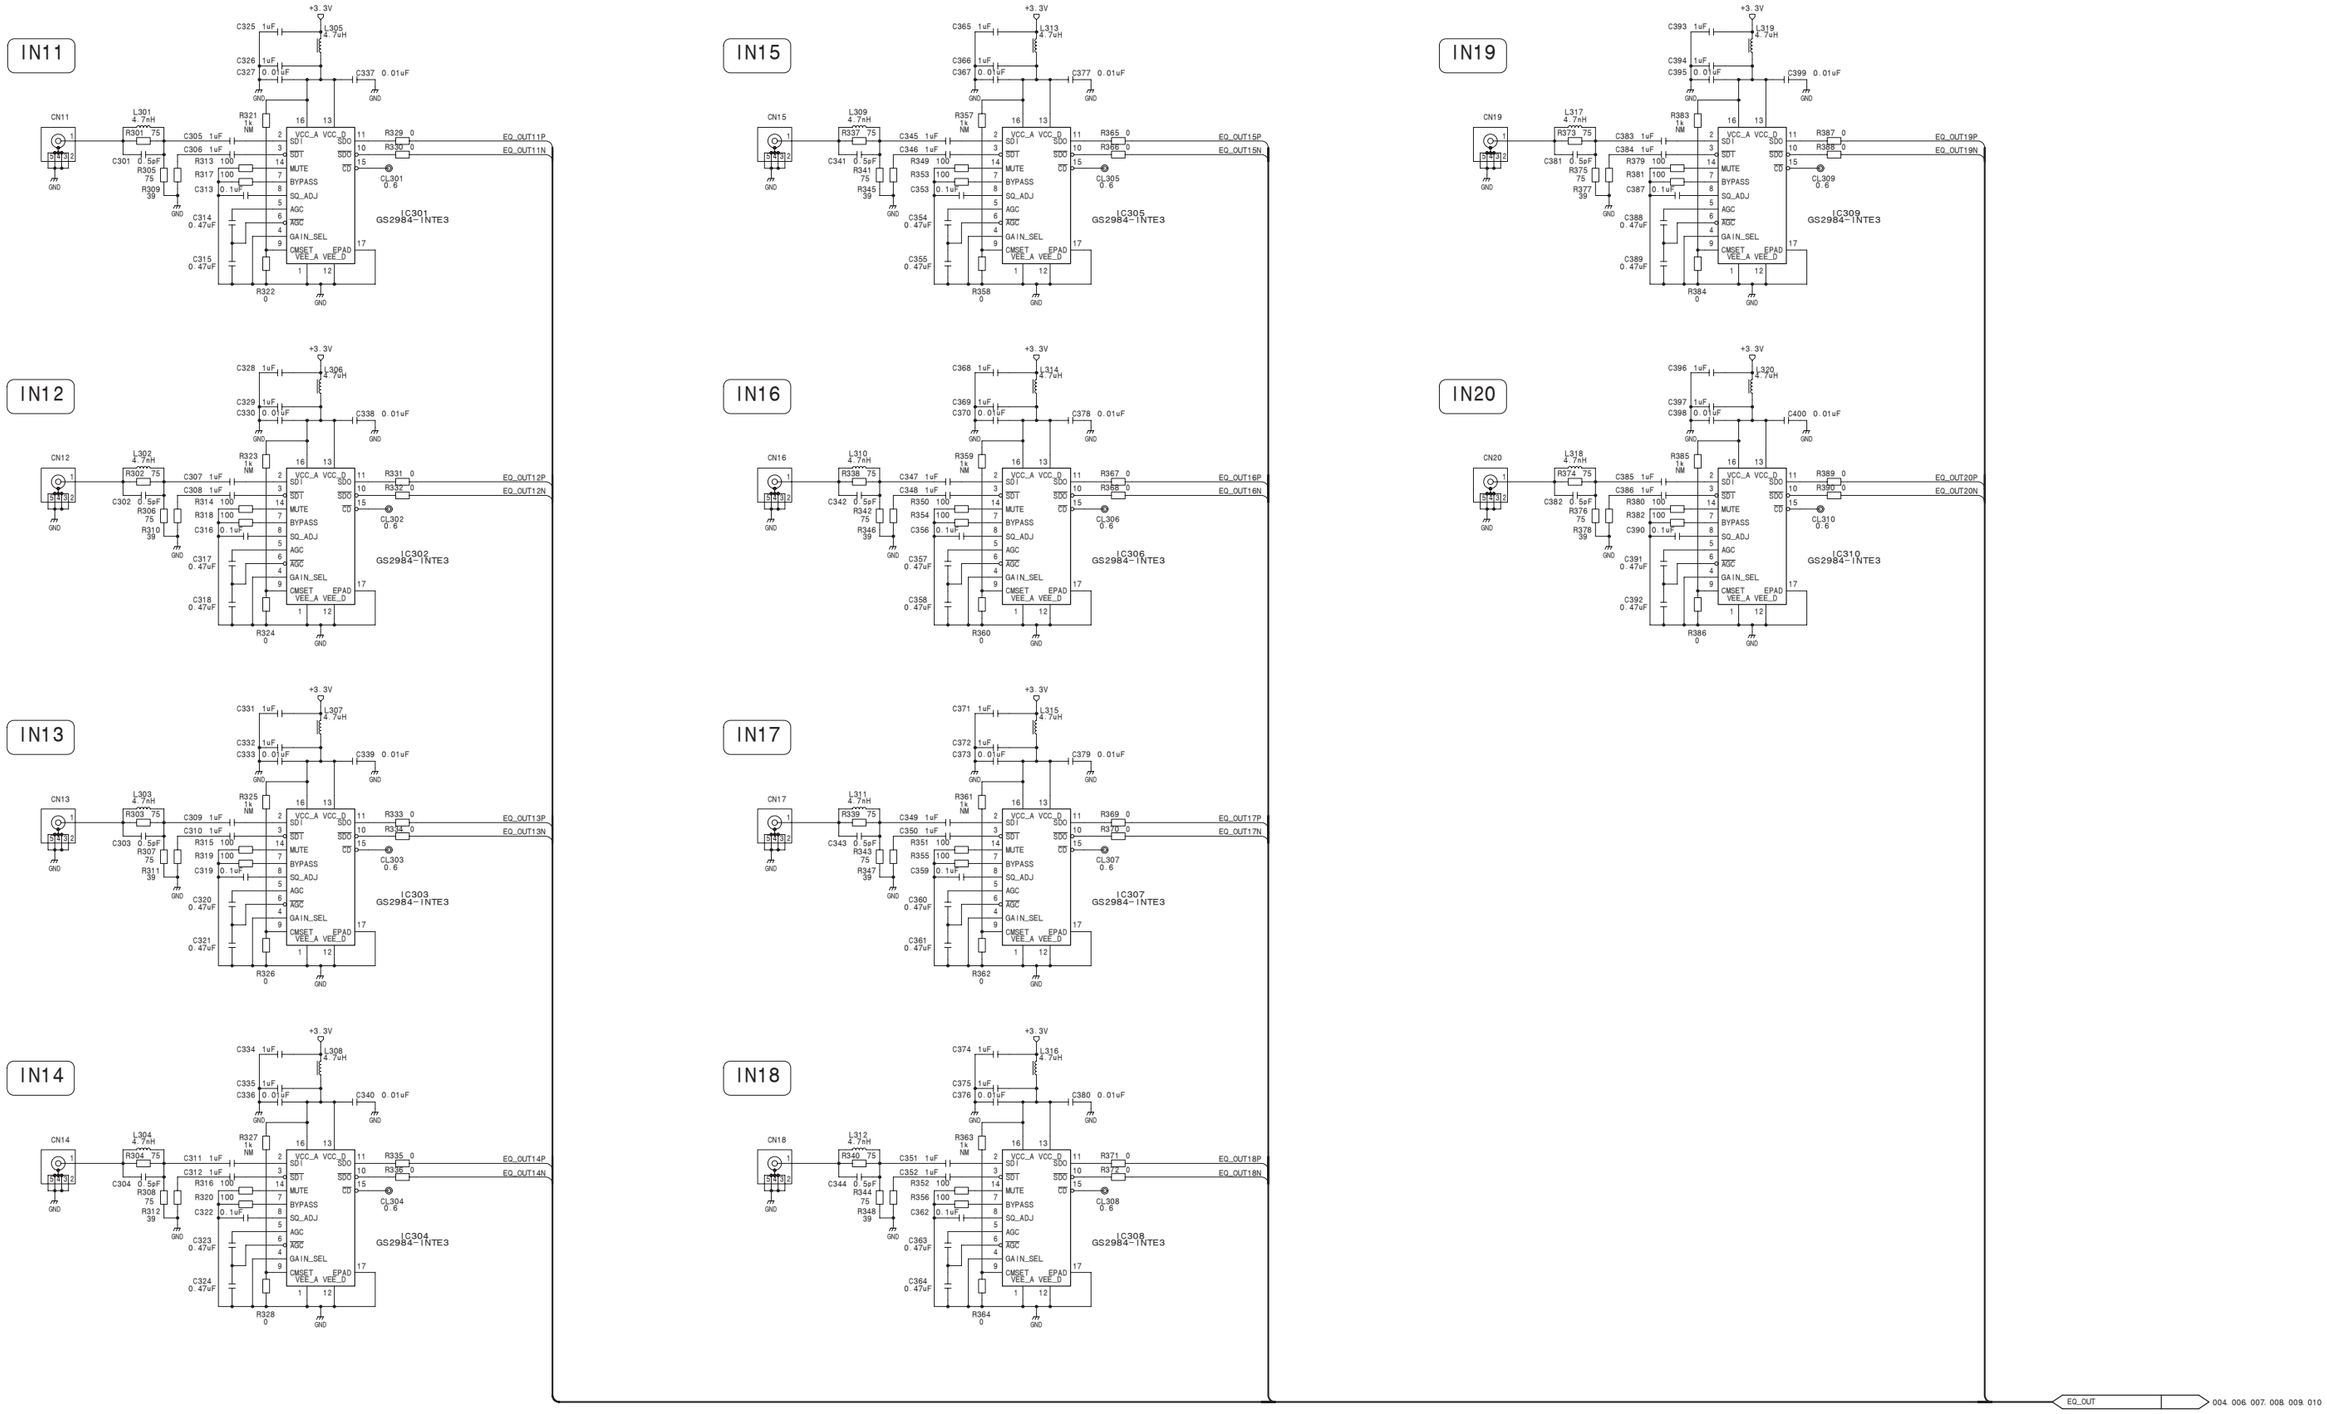

CNI-37A (5/10)

BOARD NO. 1-879-572-11

MVS-8000X_CNI-37A_001_5

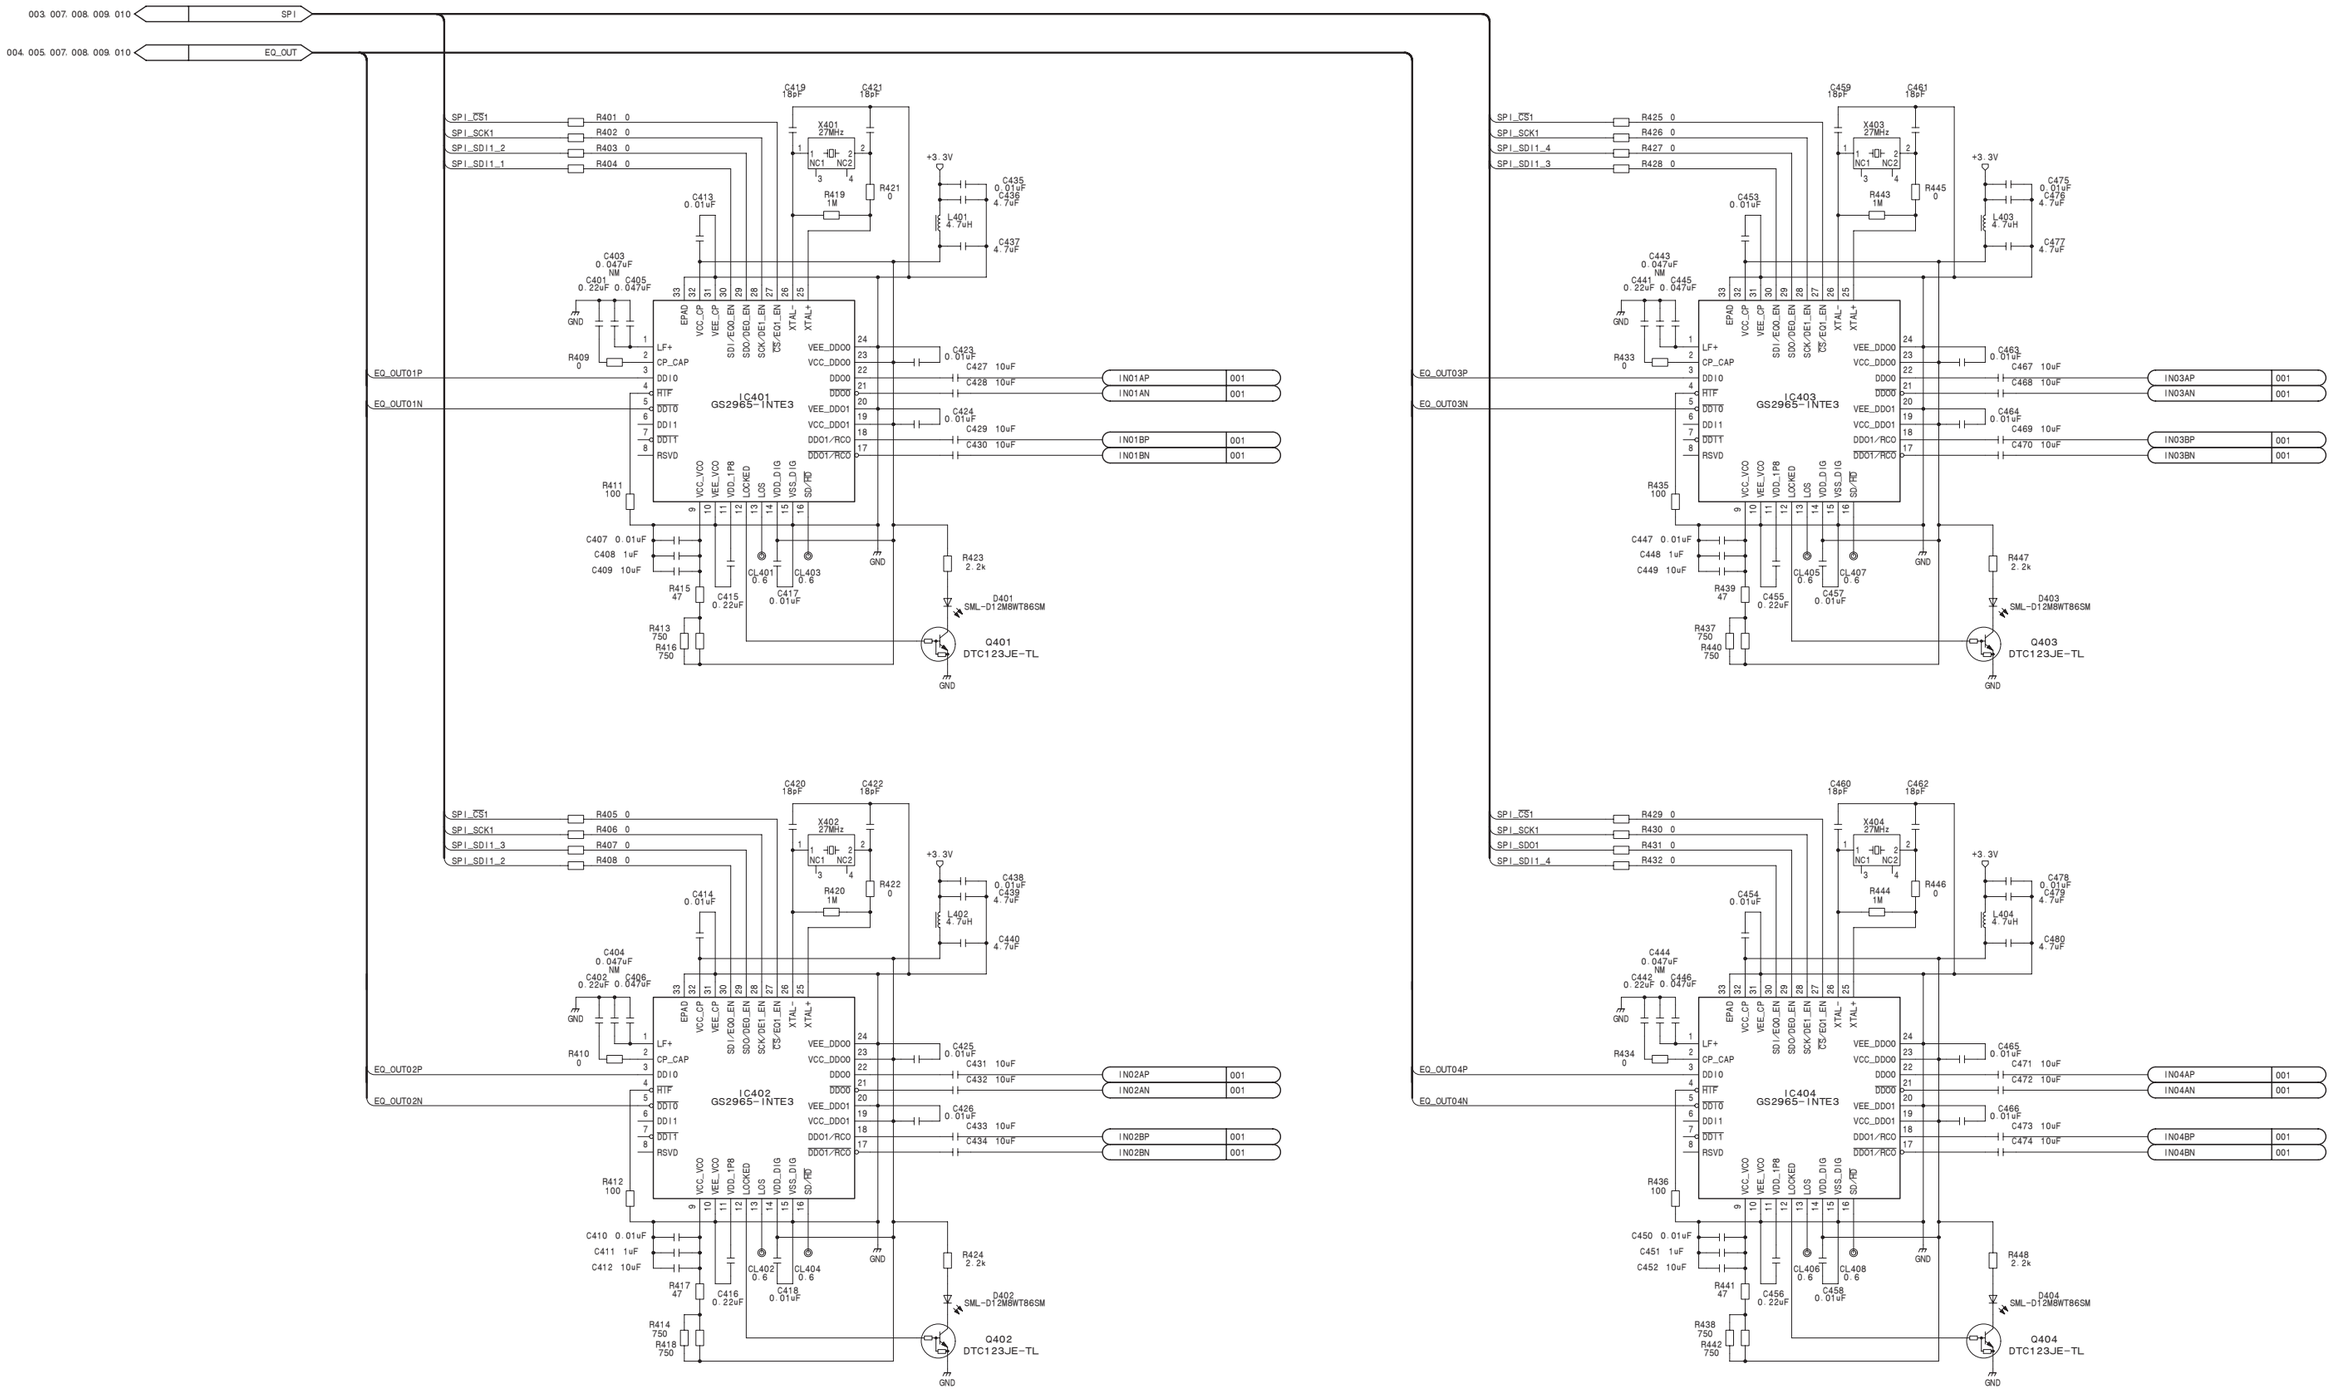

CNI-37A (6/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_6

CNI-37A (7/10)
SUFFIX: -11

003. 006. 008. 009. 010 — SPI
004. 005. 006. 008. 009. 010 — EQ_OUT

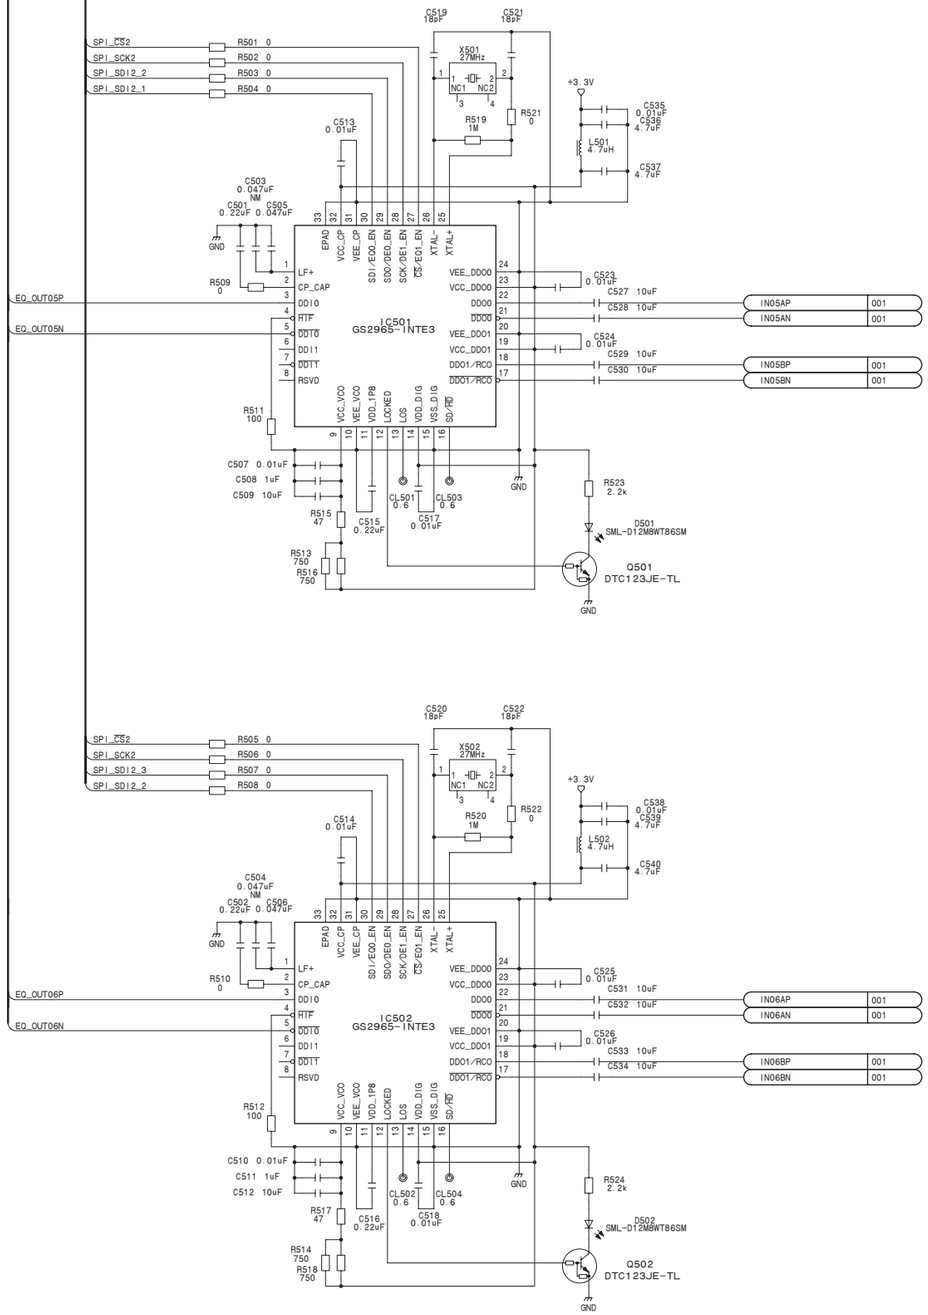

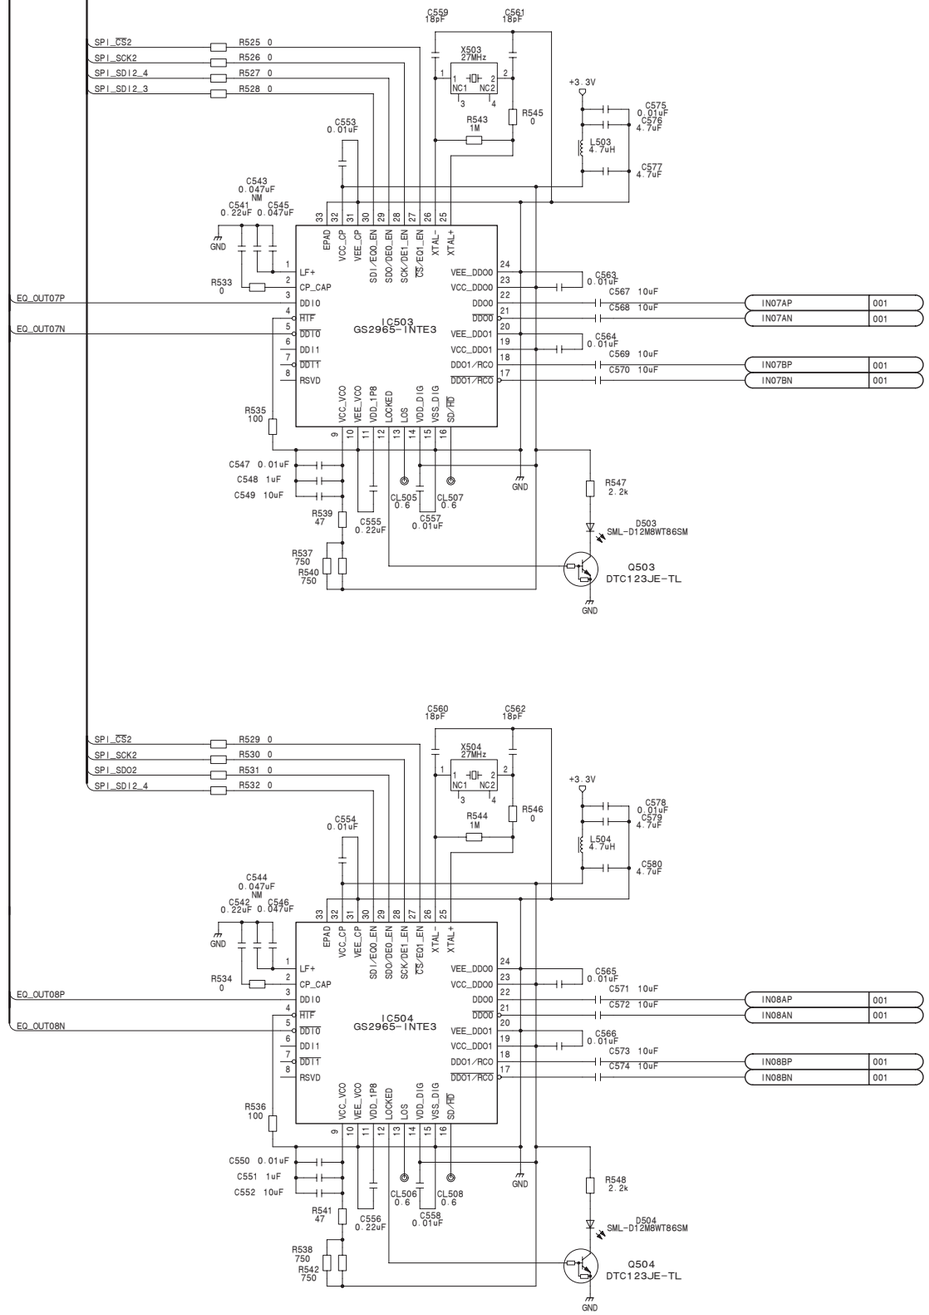

CNI-37A (7/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_7

CNI-37A (8/10) **SUFFIX: -11**

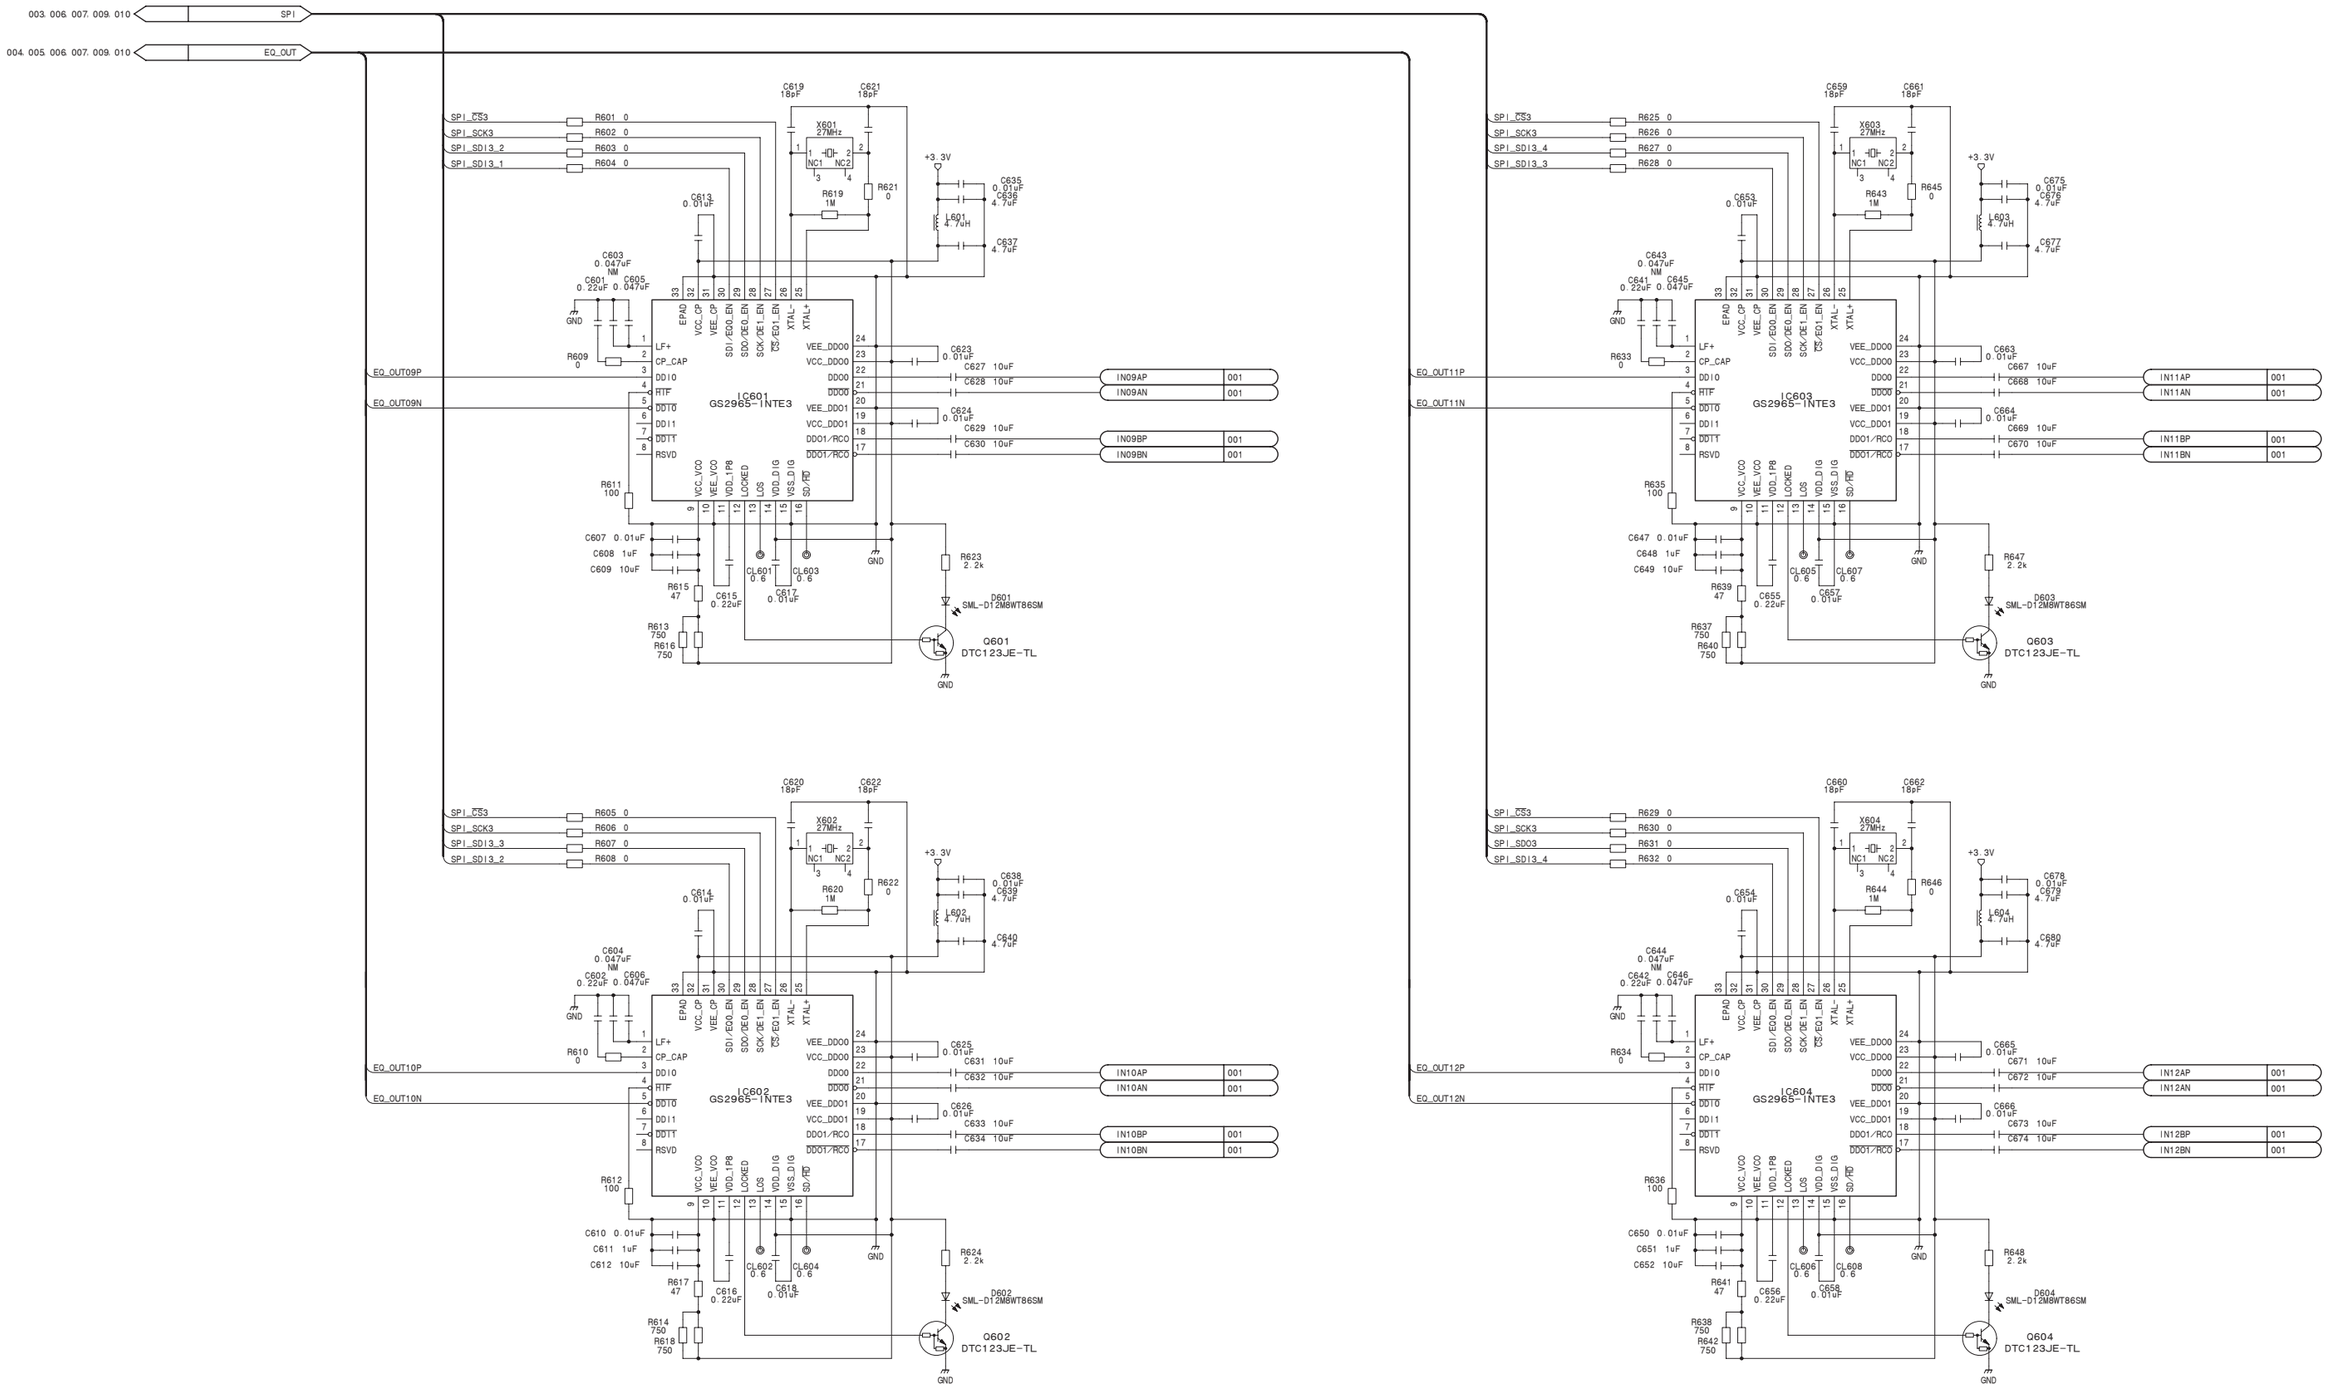

CNI-37A (8/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_8

CNI-37A (9/10)
SUFFIX: -11

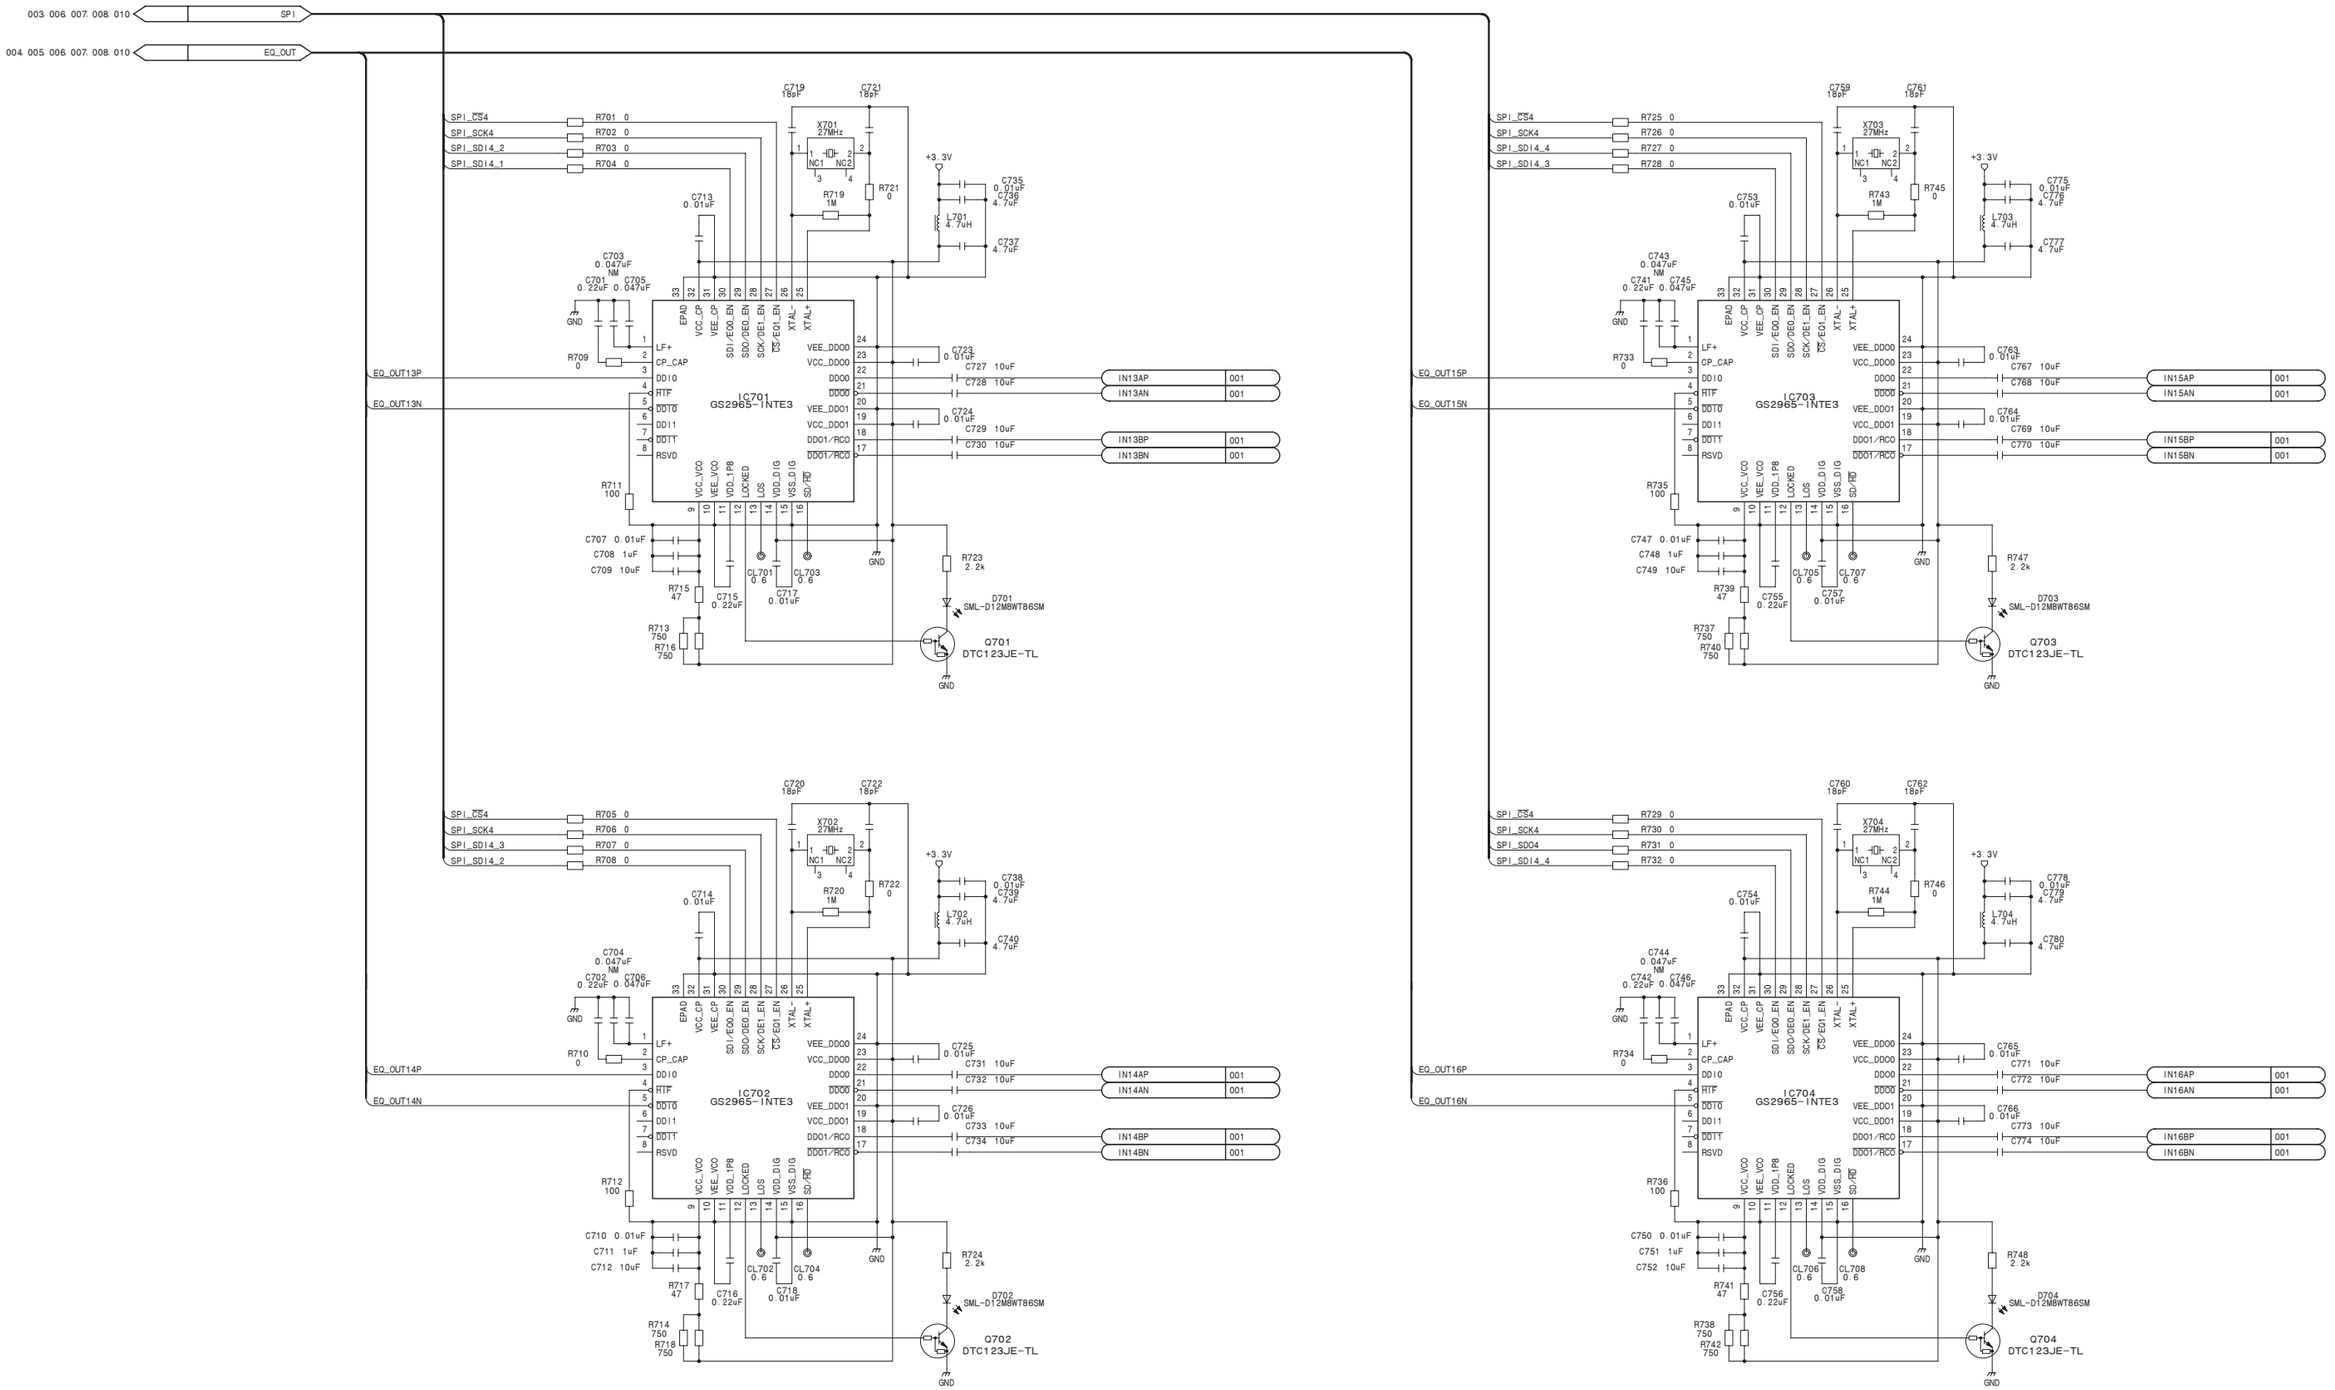

CNI-37A (9/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_9

CNI-37A (10/10)
SUFFIX: -11

CNI-37A (10/10)
SUFFIX: -11

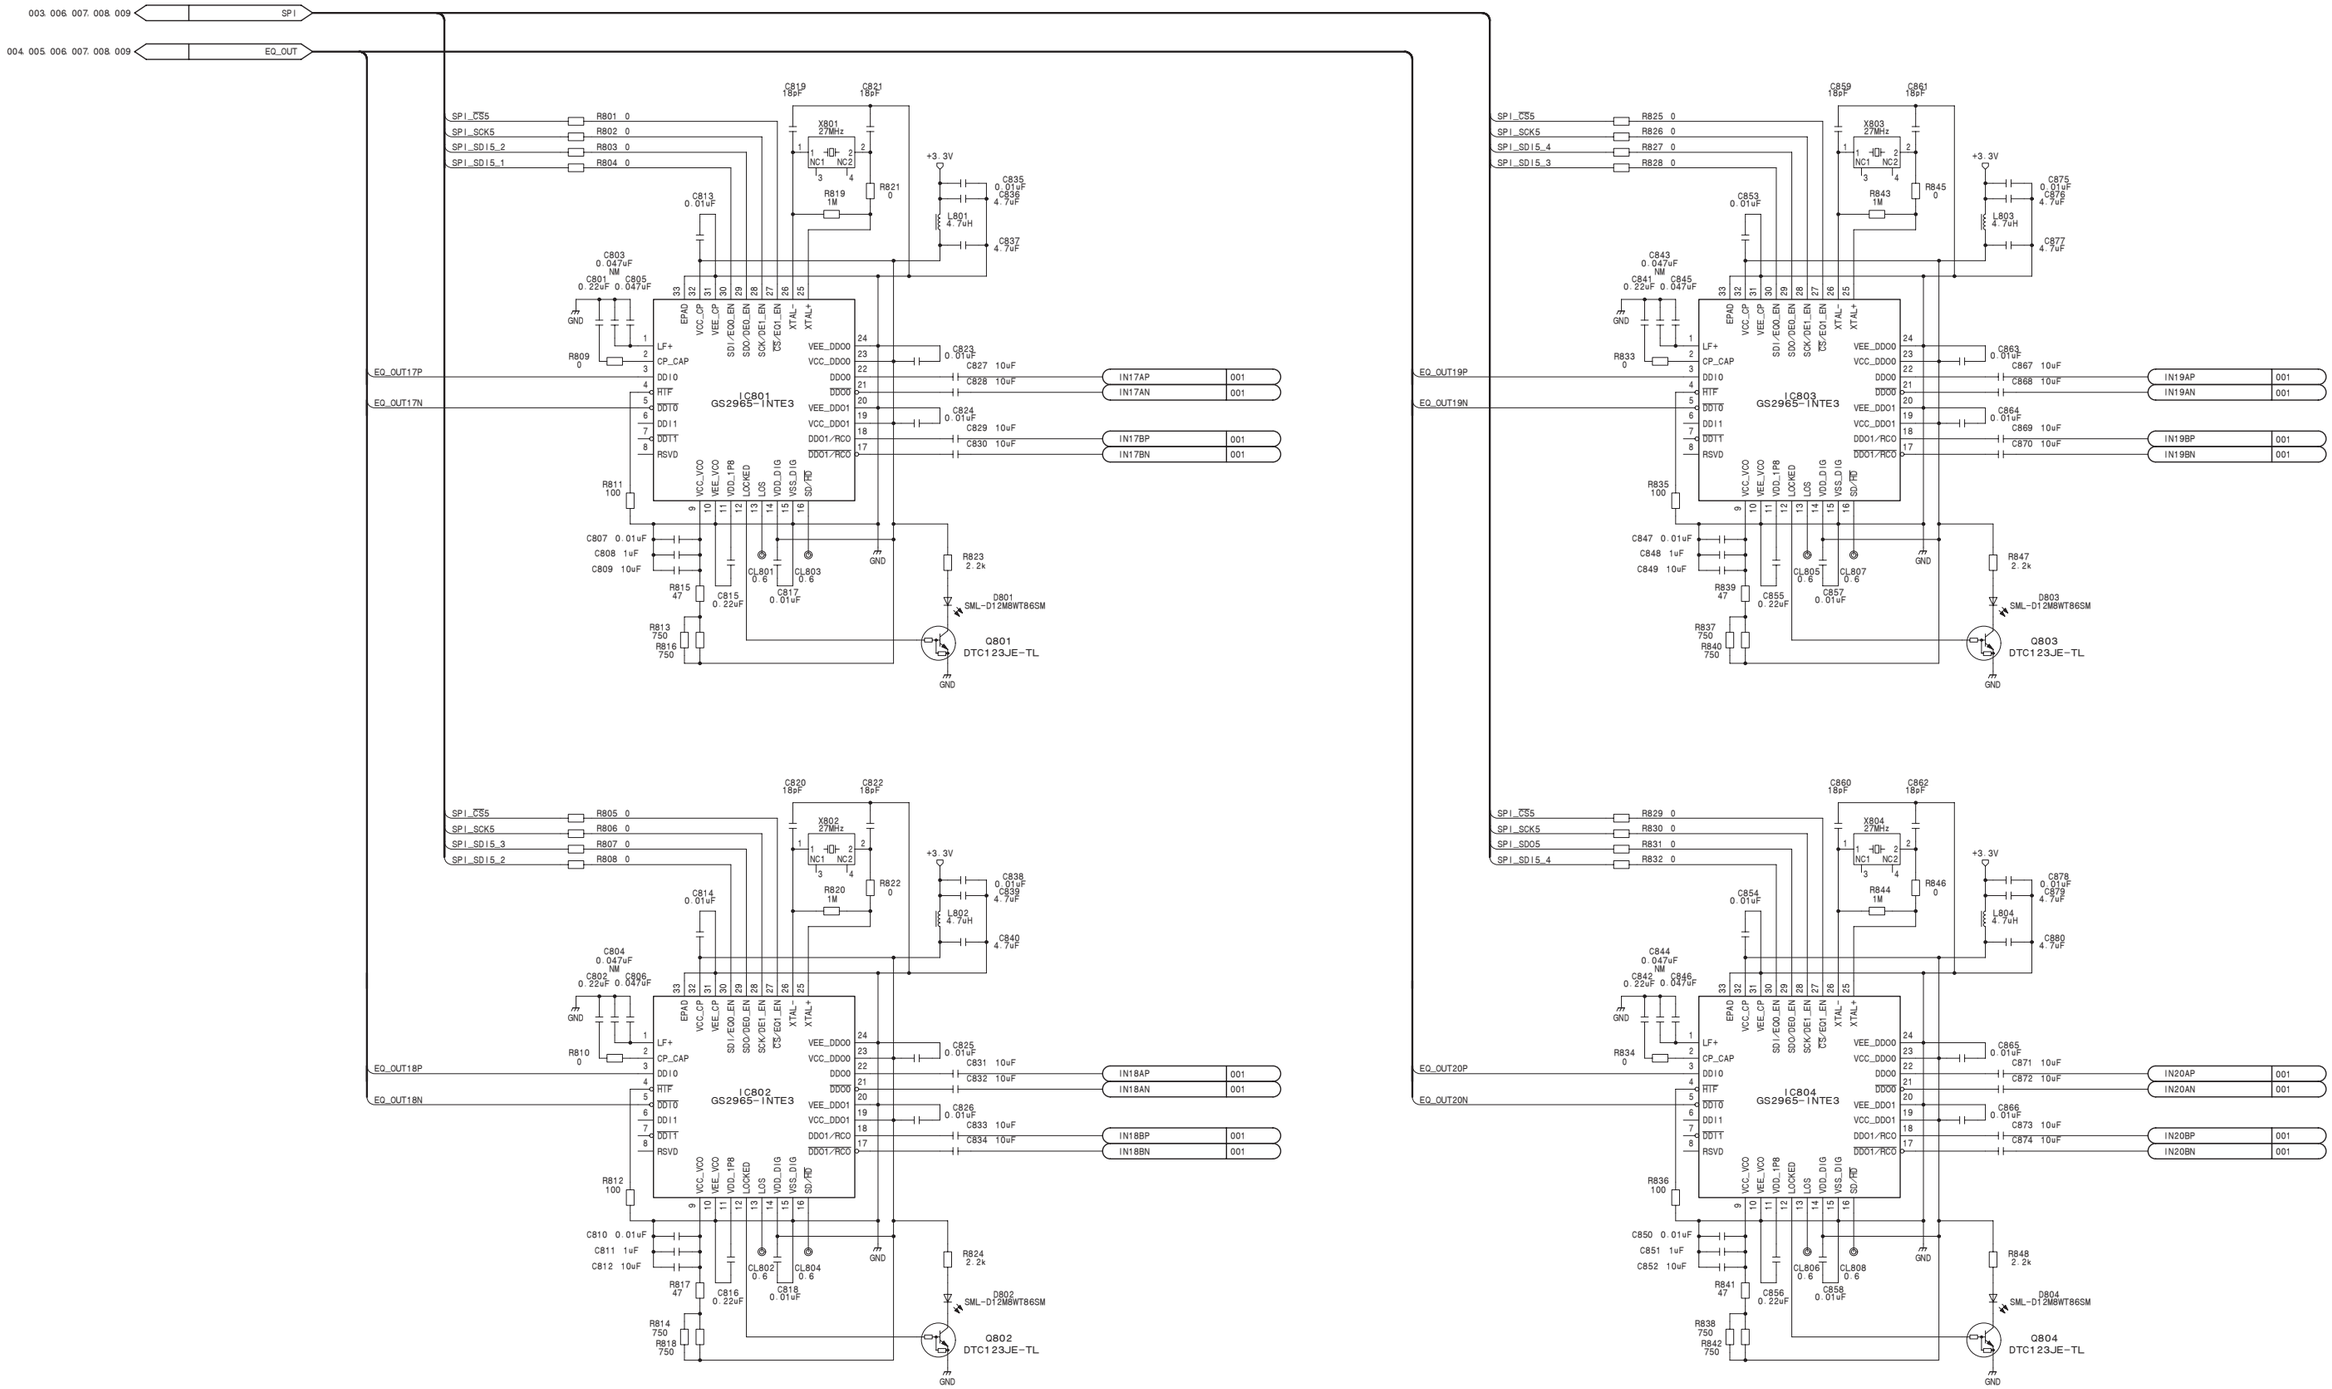

CNI-37A (10/10)
BOARD NO. 1-879-572-11
MVS-8000X_CNI-37A_001_10

CNI-37A (1/10)
SUFFIX: -12

CNM1

	A	B	BG	C	D	DG
1	IN01BP	IN01BN	GND	IN01AP	IN01AN	GND
2	IN02BP	IN02BN	GND	IN02AP	IN02AN	GND
3	IN03BP	IN03BN	GND	IN03AP	IN03AN	GND
4	IN04BP	IN04BN	GND	IN04AP	IN04AN	GND
5	IN05BP	IN05BN	GND	IN05AP	IN05AN	GND
6	IN06BP	IN06BN	GND	IN06AP	IN06AN	GND
7	IN07BP	IN07BN	GND	IN07AP	IN07AN	GND
8	IN08BP	IN08BN	GND	IN08AP	IN08AN	GND
9	IN09BP	IN09BN	GND	IN09AP	IN09AN	GND
10	IN10BP	IN10BN	GND	IN10AP	IN10AN	GND

CNF1

	A	B	BG	C	D	DG
1	IN11BP	IN11BN	GND	IN11AP	IN11AN	GND
2	IN12BP	IN12BN	GND	IN12AP	IN12AN	GND
3	IN13BP	IN13BN	GND	IN13AP	IN13AN	GND
4	IN14BP	IN14BN	GND	IN14AP	IN14AN	GND
5	IN15BP	IN15BN	GND	IN15AP	IN15AN	GND
6	IN16BP	IN16BN	GND	IN16AP	IN16AN	GND
7	IN17BP	IN17BN	GND	IN17AP	IN17AN	GND
8	IN18BP	IN18BN	GND	IN18AP	IN18AN	GND
9	IN19BP	IN19BN	GND	IN19AP	IN19AN	GND
10	IN20BP	IN20BN	GND	IN20AP	IN20AN	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	SLOT_No4	SLOT_No5	GND	SLOT_No6	SLOT_No7	GND
4	SLOT_No0	SLOT_No1	GND	SLOT_No2	SLOT_No3	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	I2C_SCL	I2C_SDA	GND
6	RESET	(DC_ENBL)	GND	X/XSF	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNI-37A (1/10)

BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_1

4-109 (a)

CNI-37A (2/10)
SUFFIX: -12

CNI-37A (2/10)
SUFFIX: -12

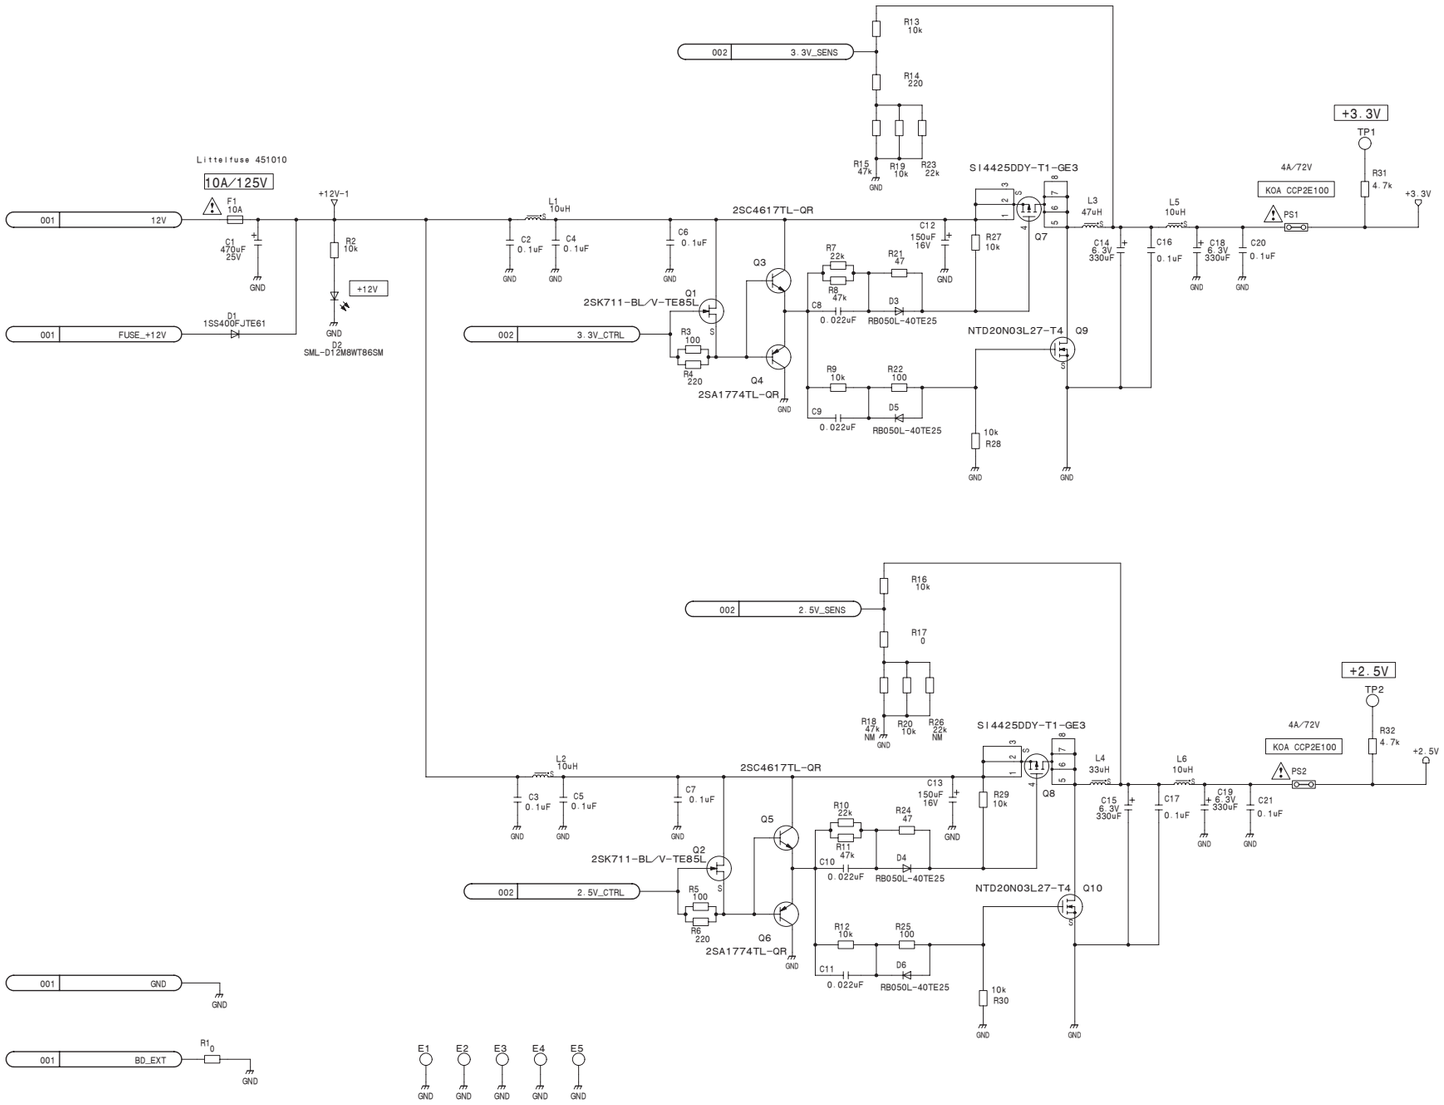

CNI-37A (2/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_2

CNI-37A (3/10)
SUFFIX: -12

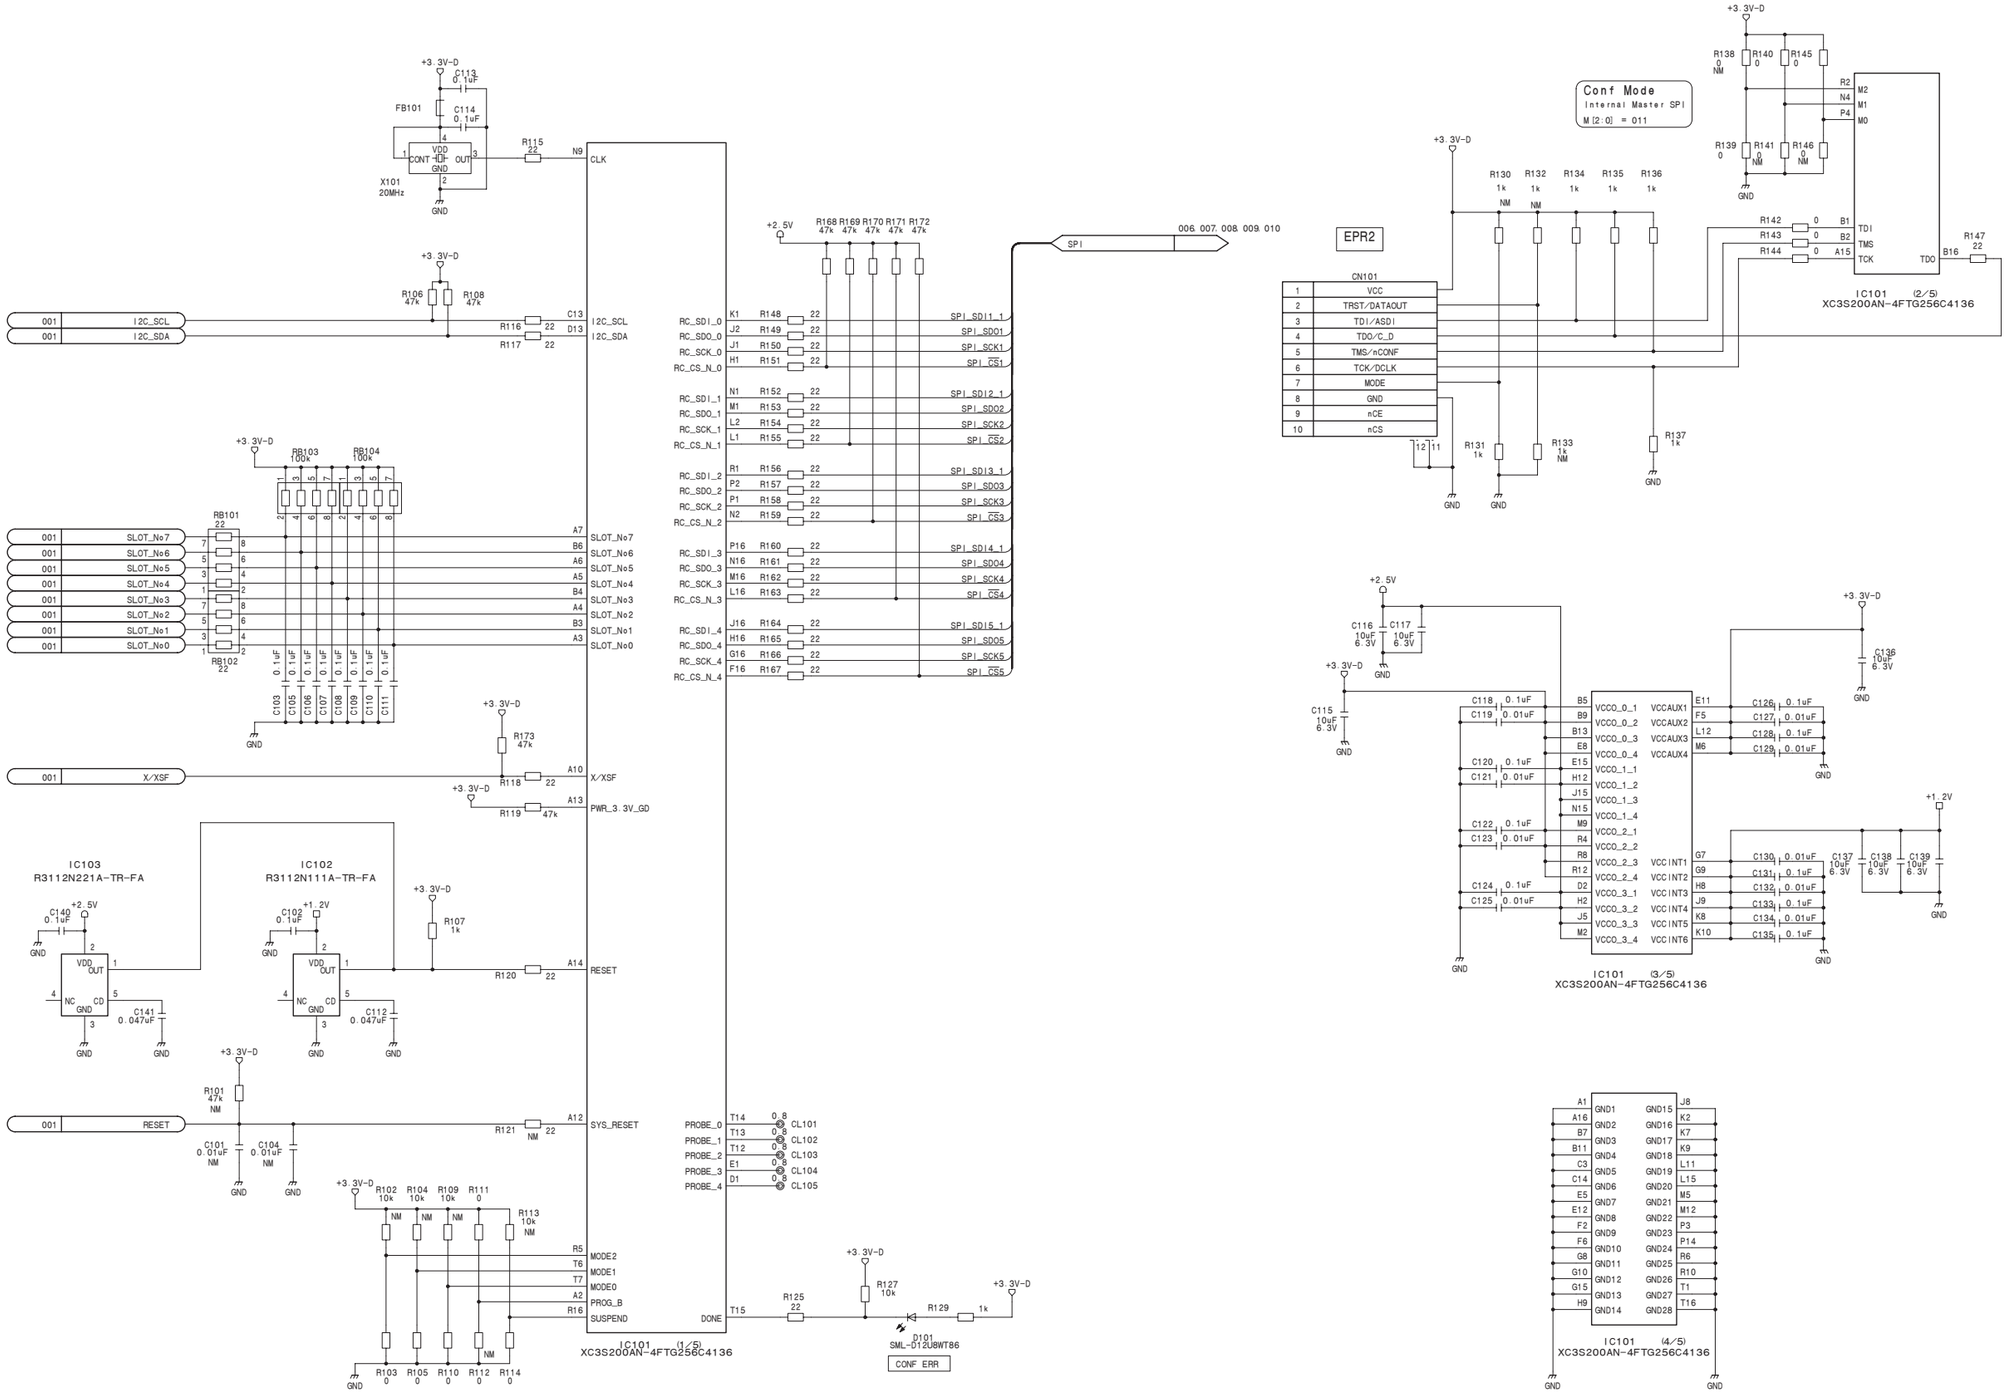

CNI-37A (3/10)

BOARD NO. 1-879-572-12

MVS-8000X_CNI-37A_002_3

CNI-37A (4/10)
SUFFIX: -12

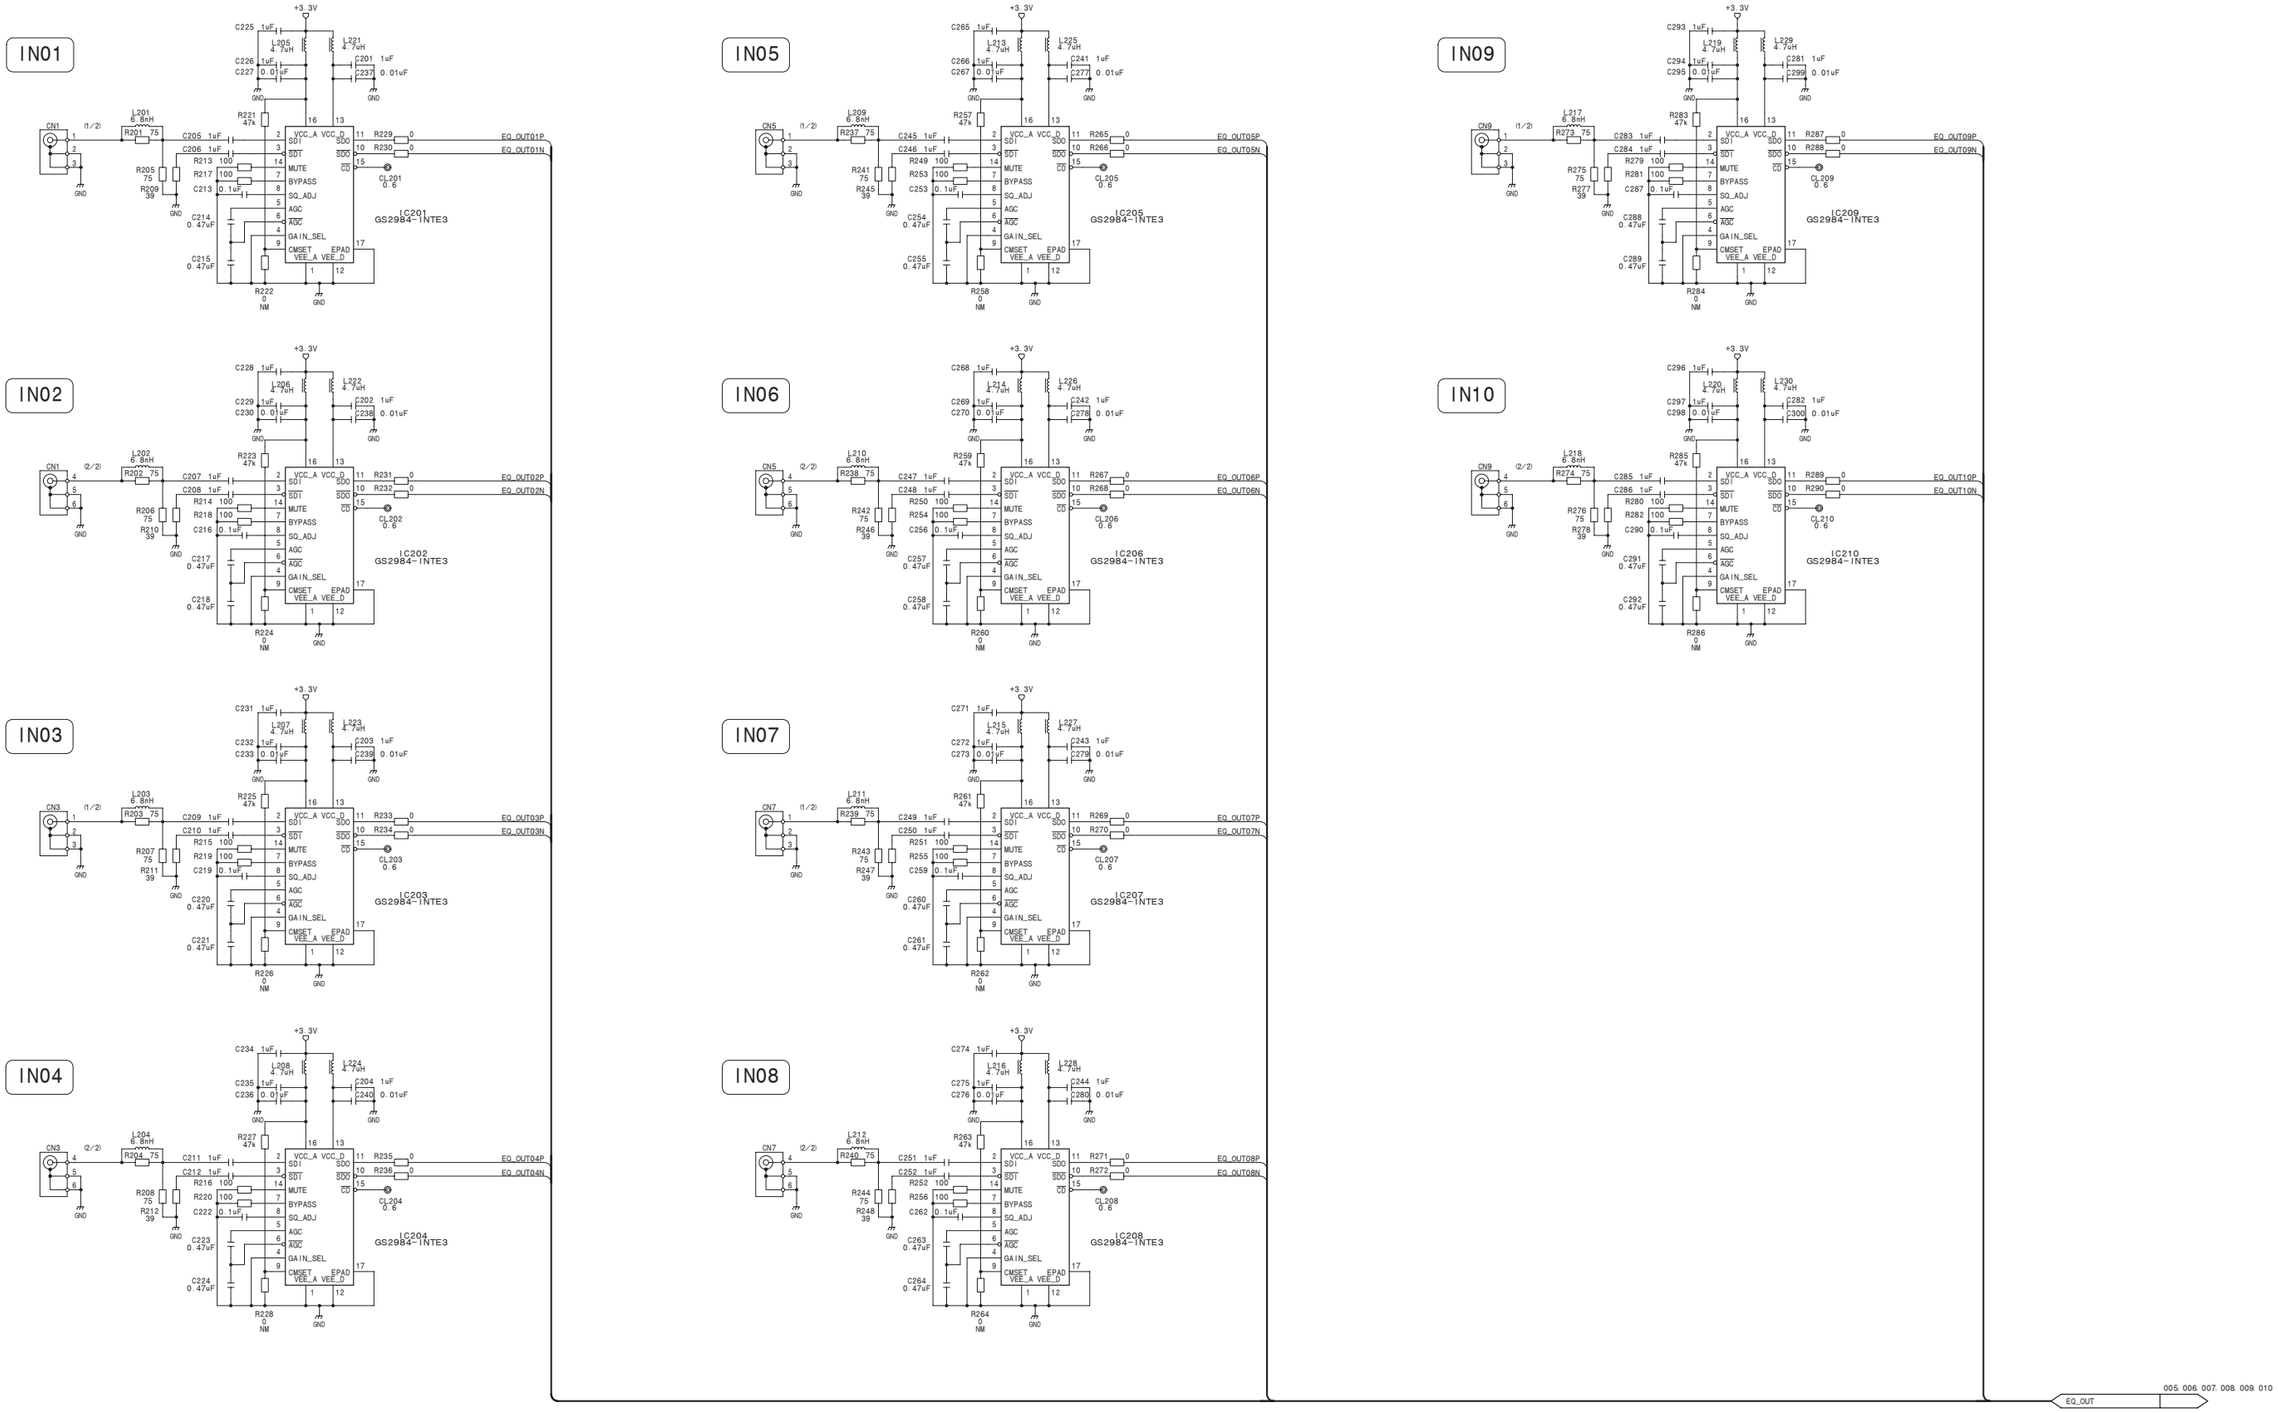

CNI-37A (4/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_4

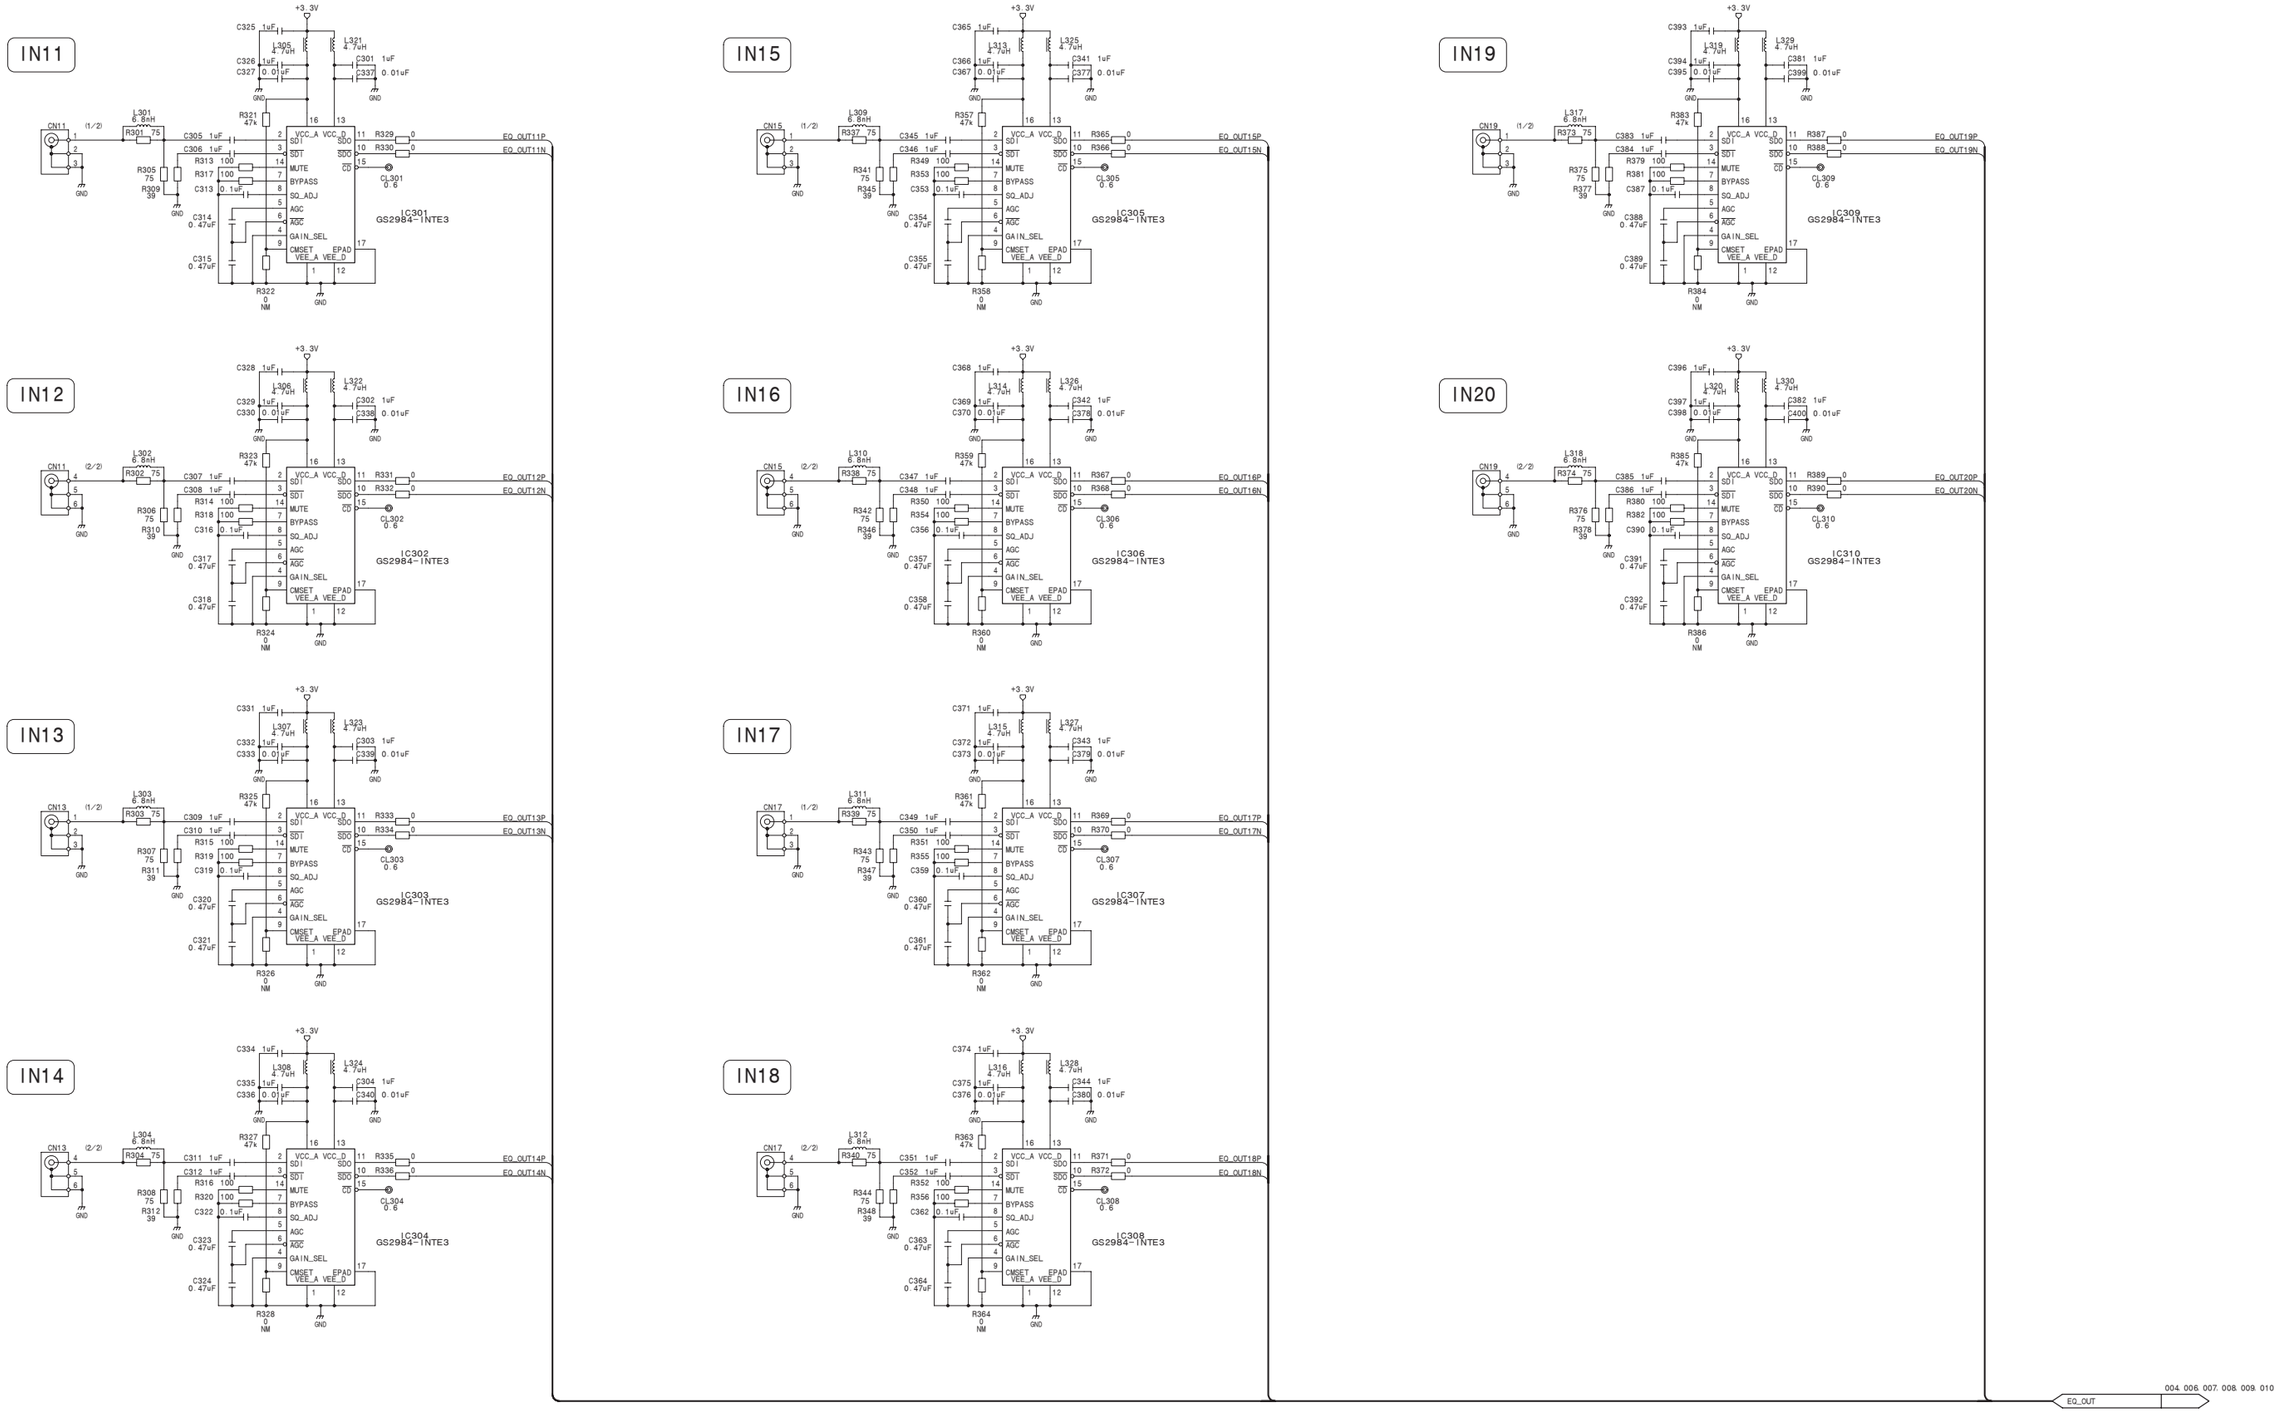

CNI-37A (5/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_5

CNI-37A (6/10) **SUFFIX: -12**

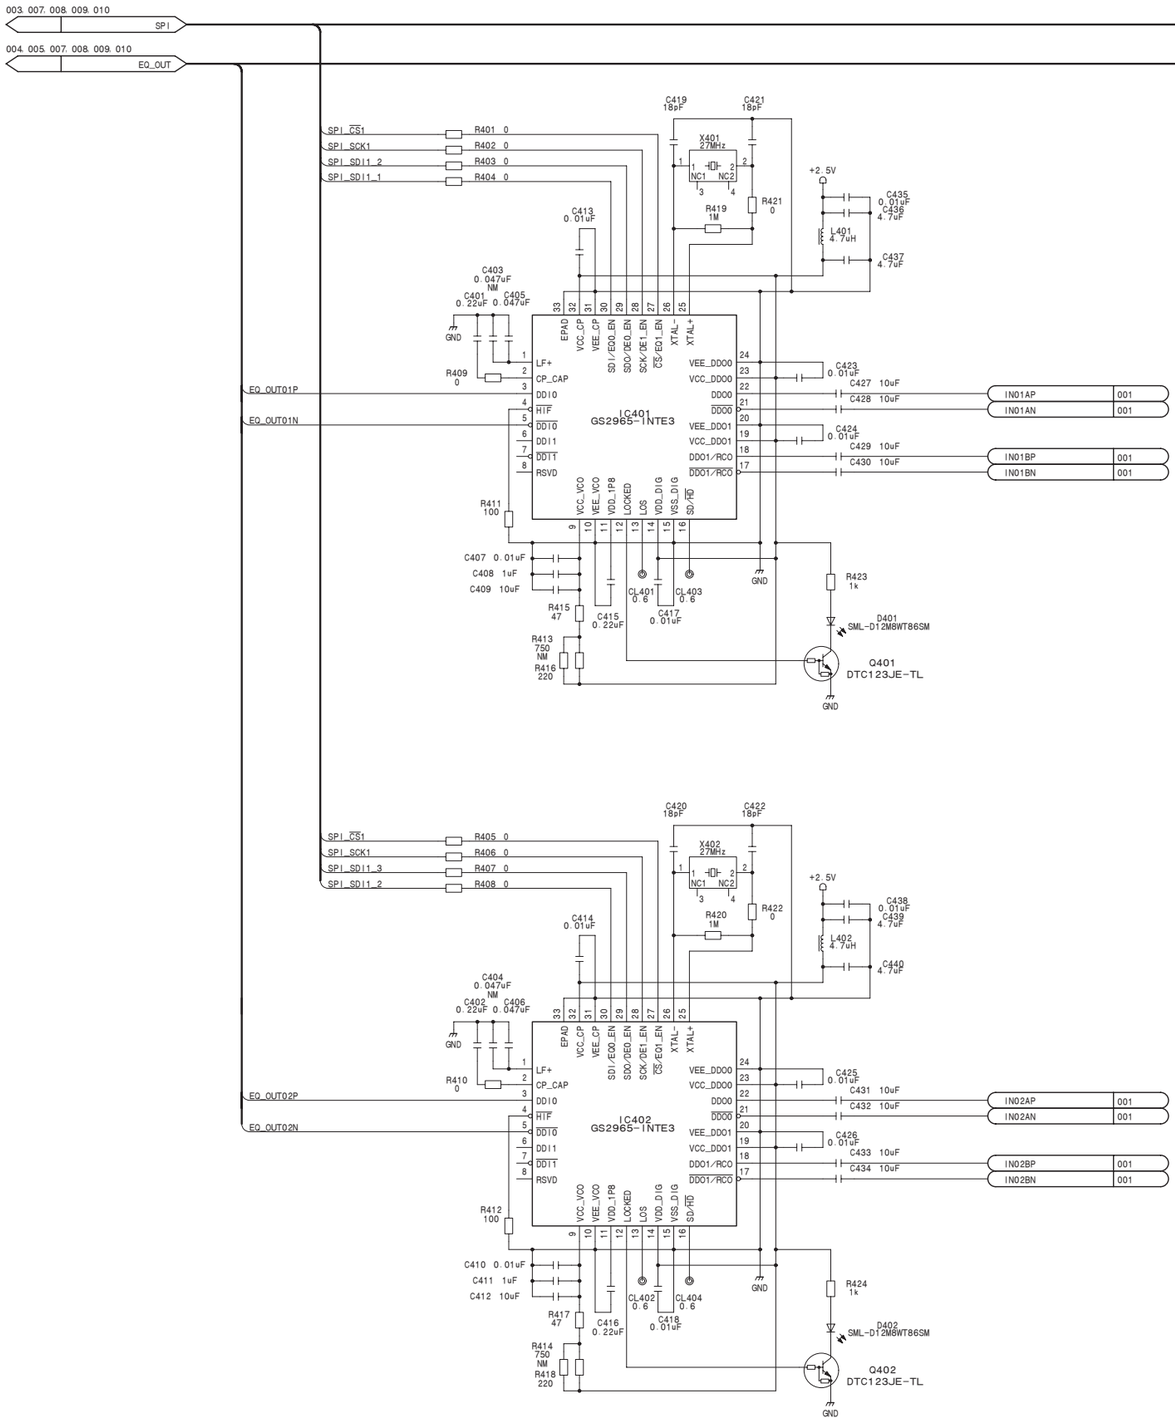

CNI-37A (6/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_6

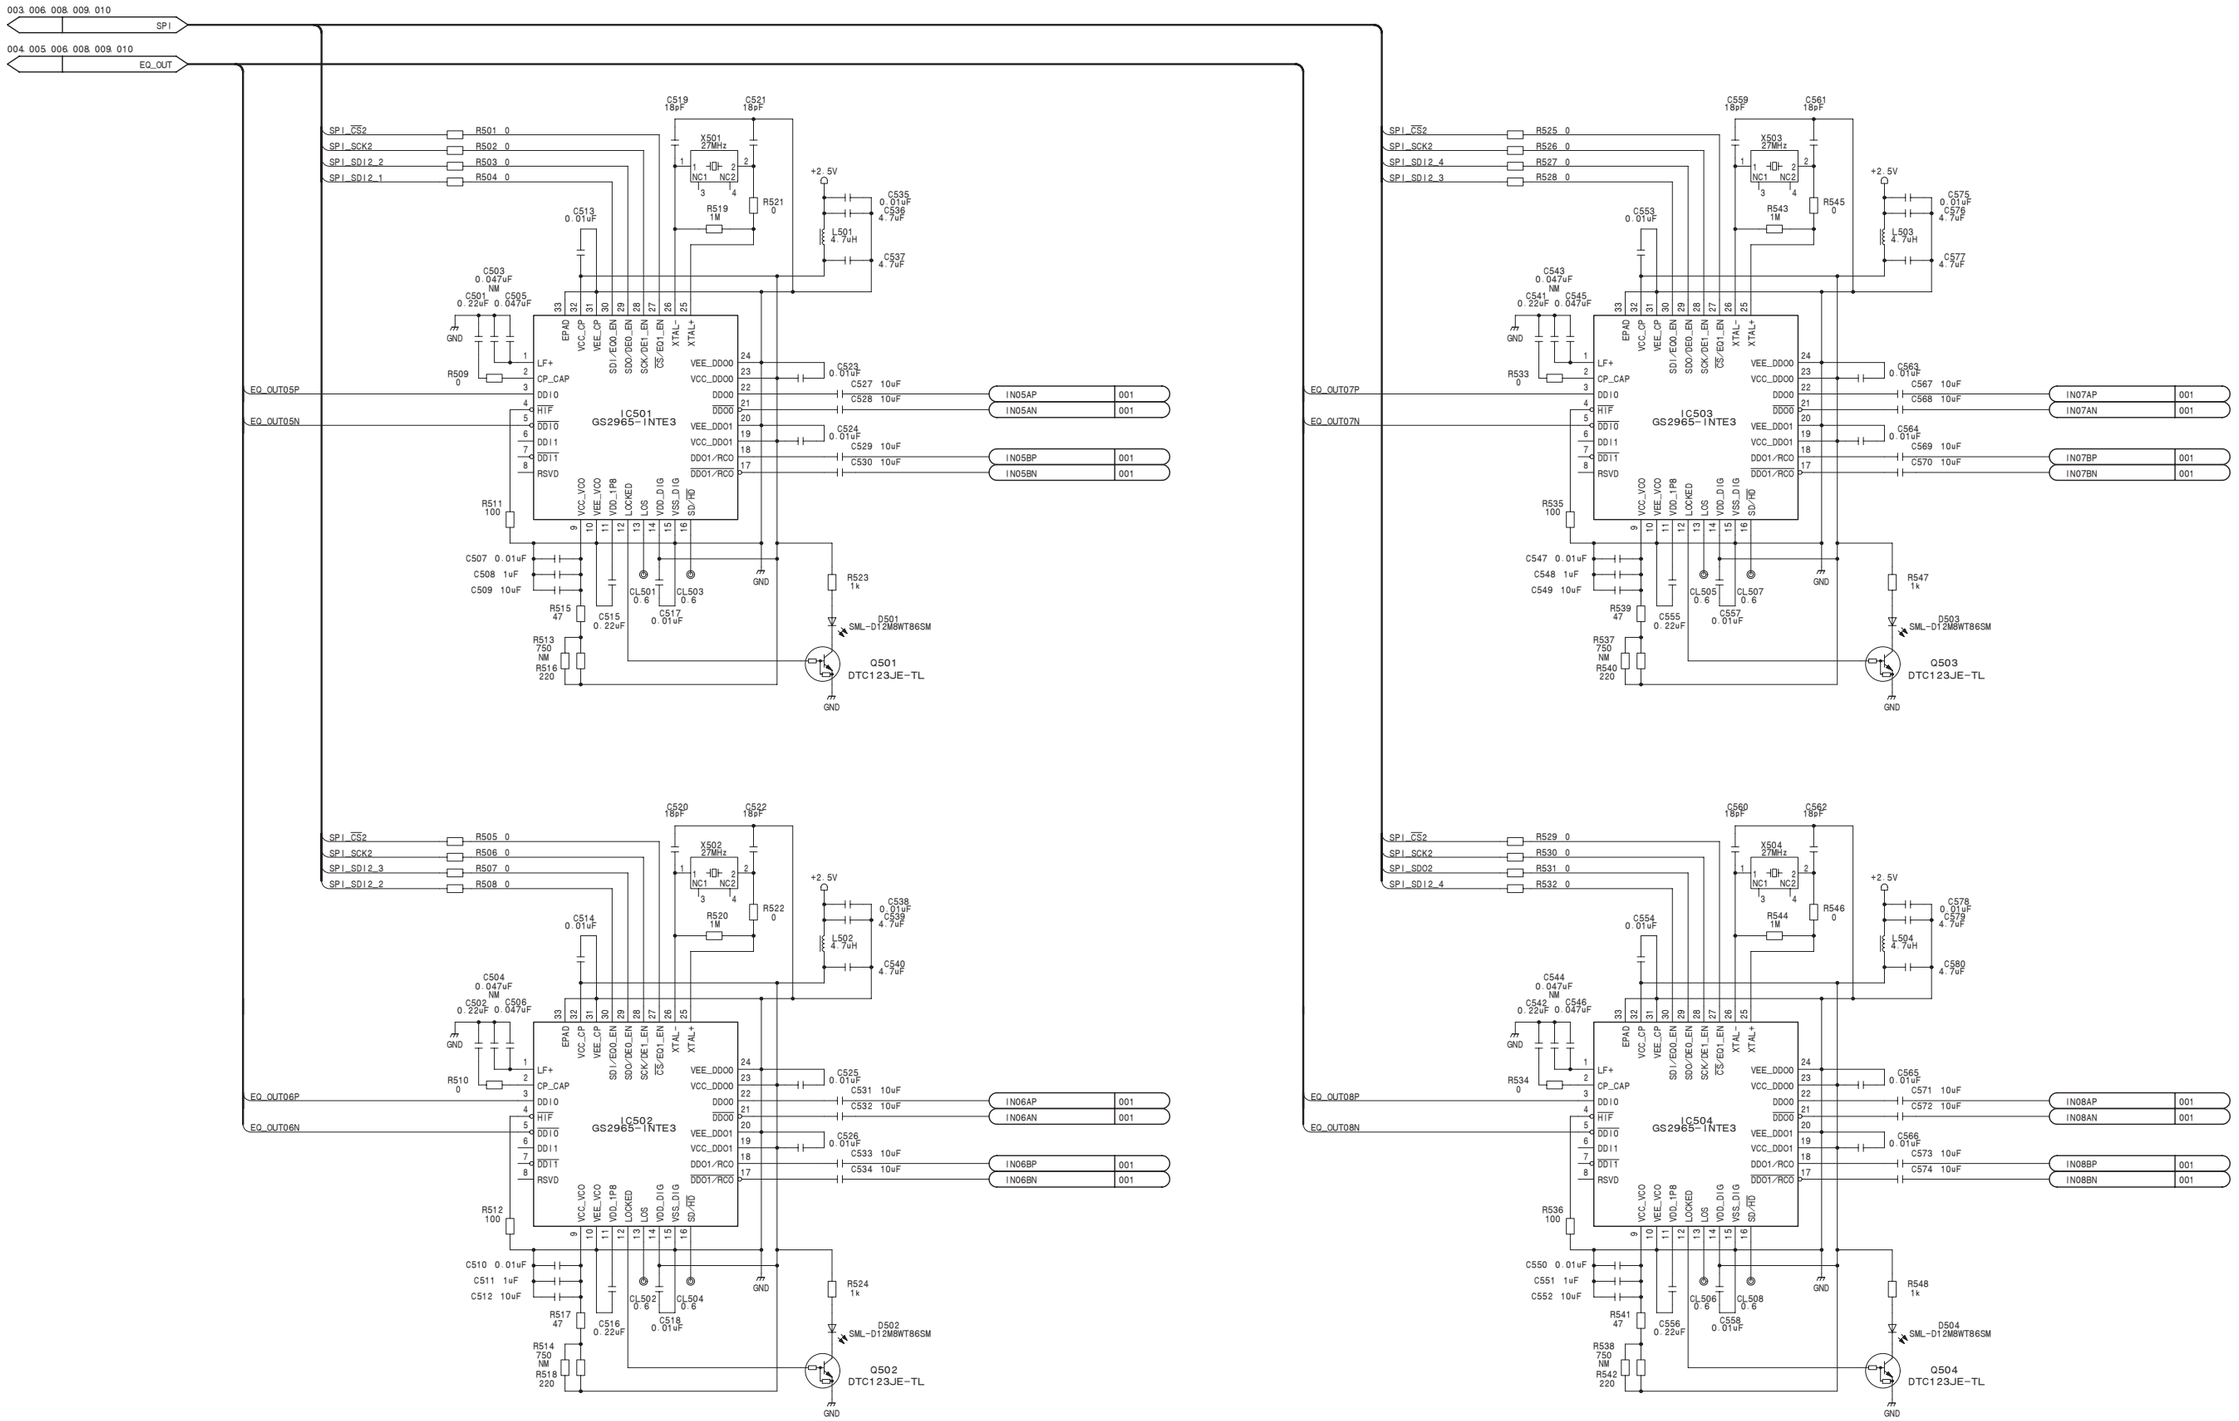

CNI-37A (7/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_7

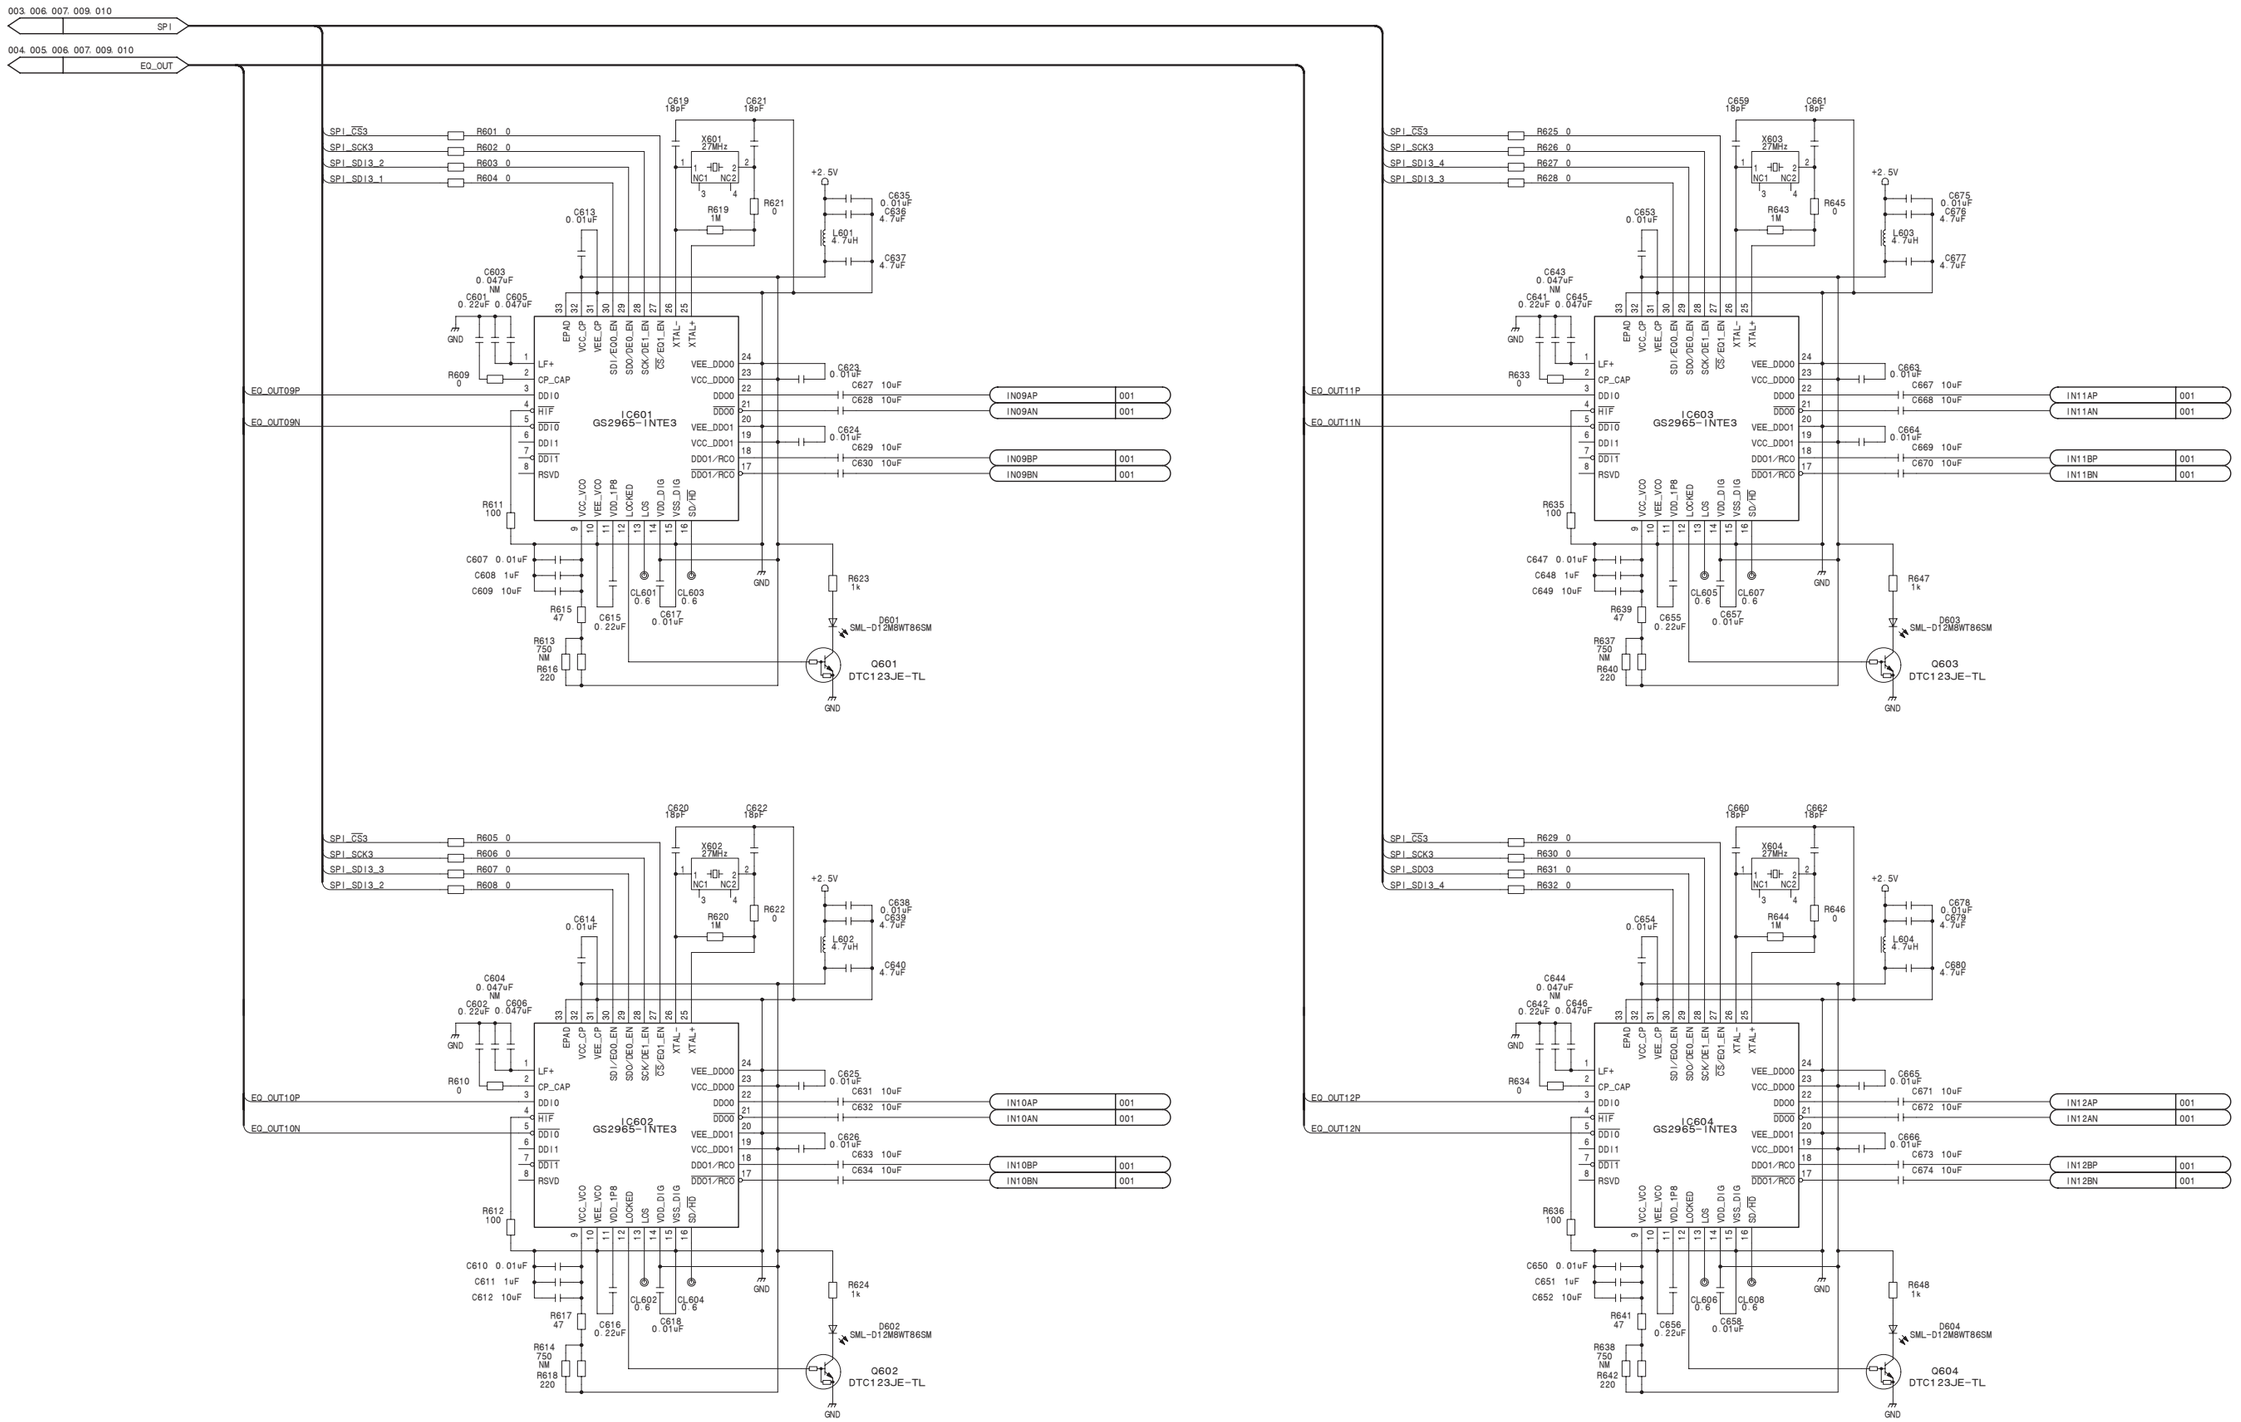

CNI-37A (8/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_8

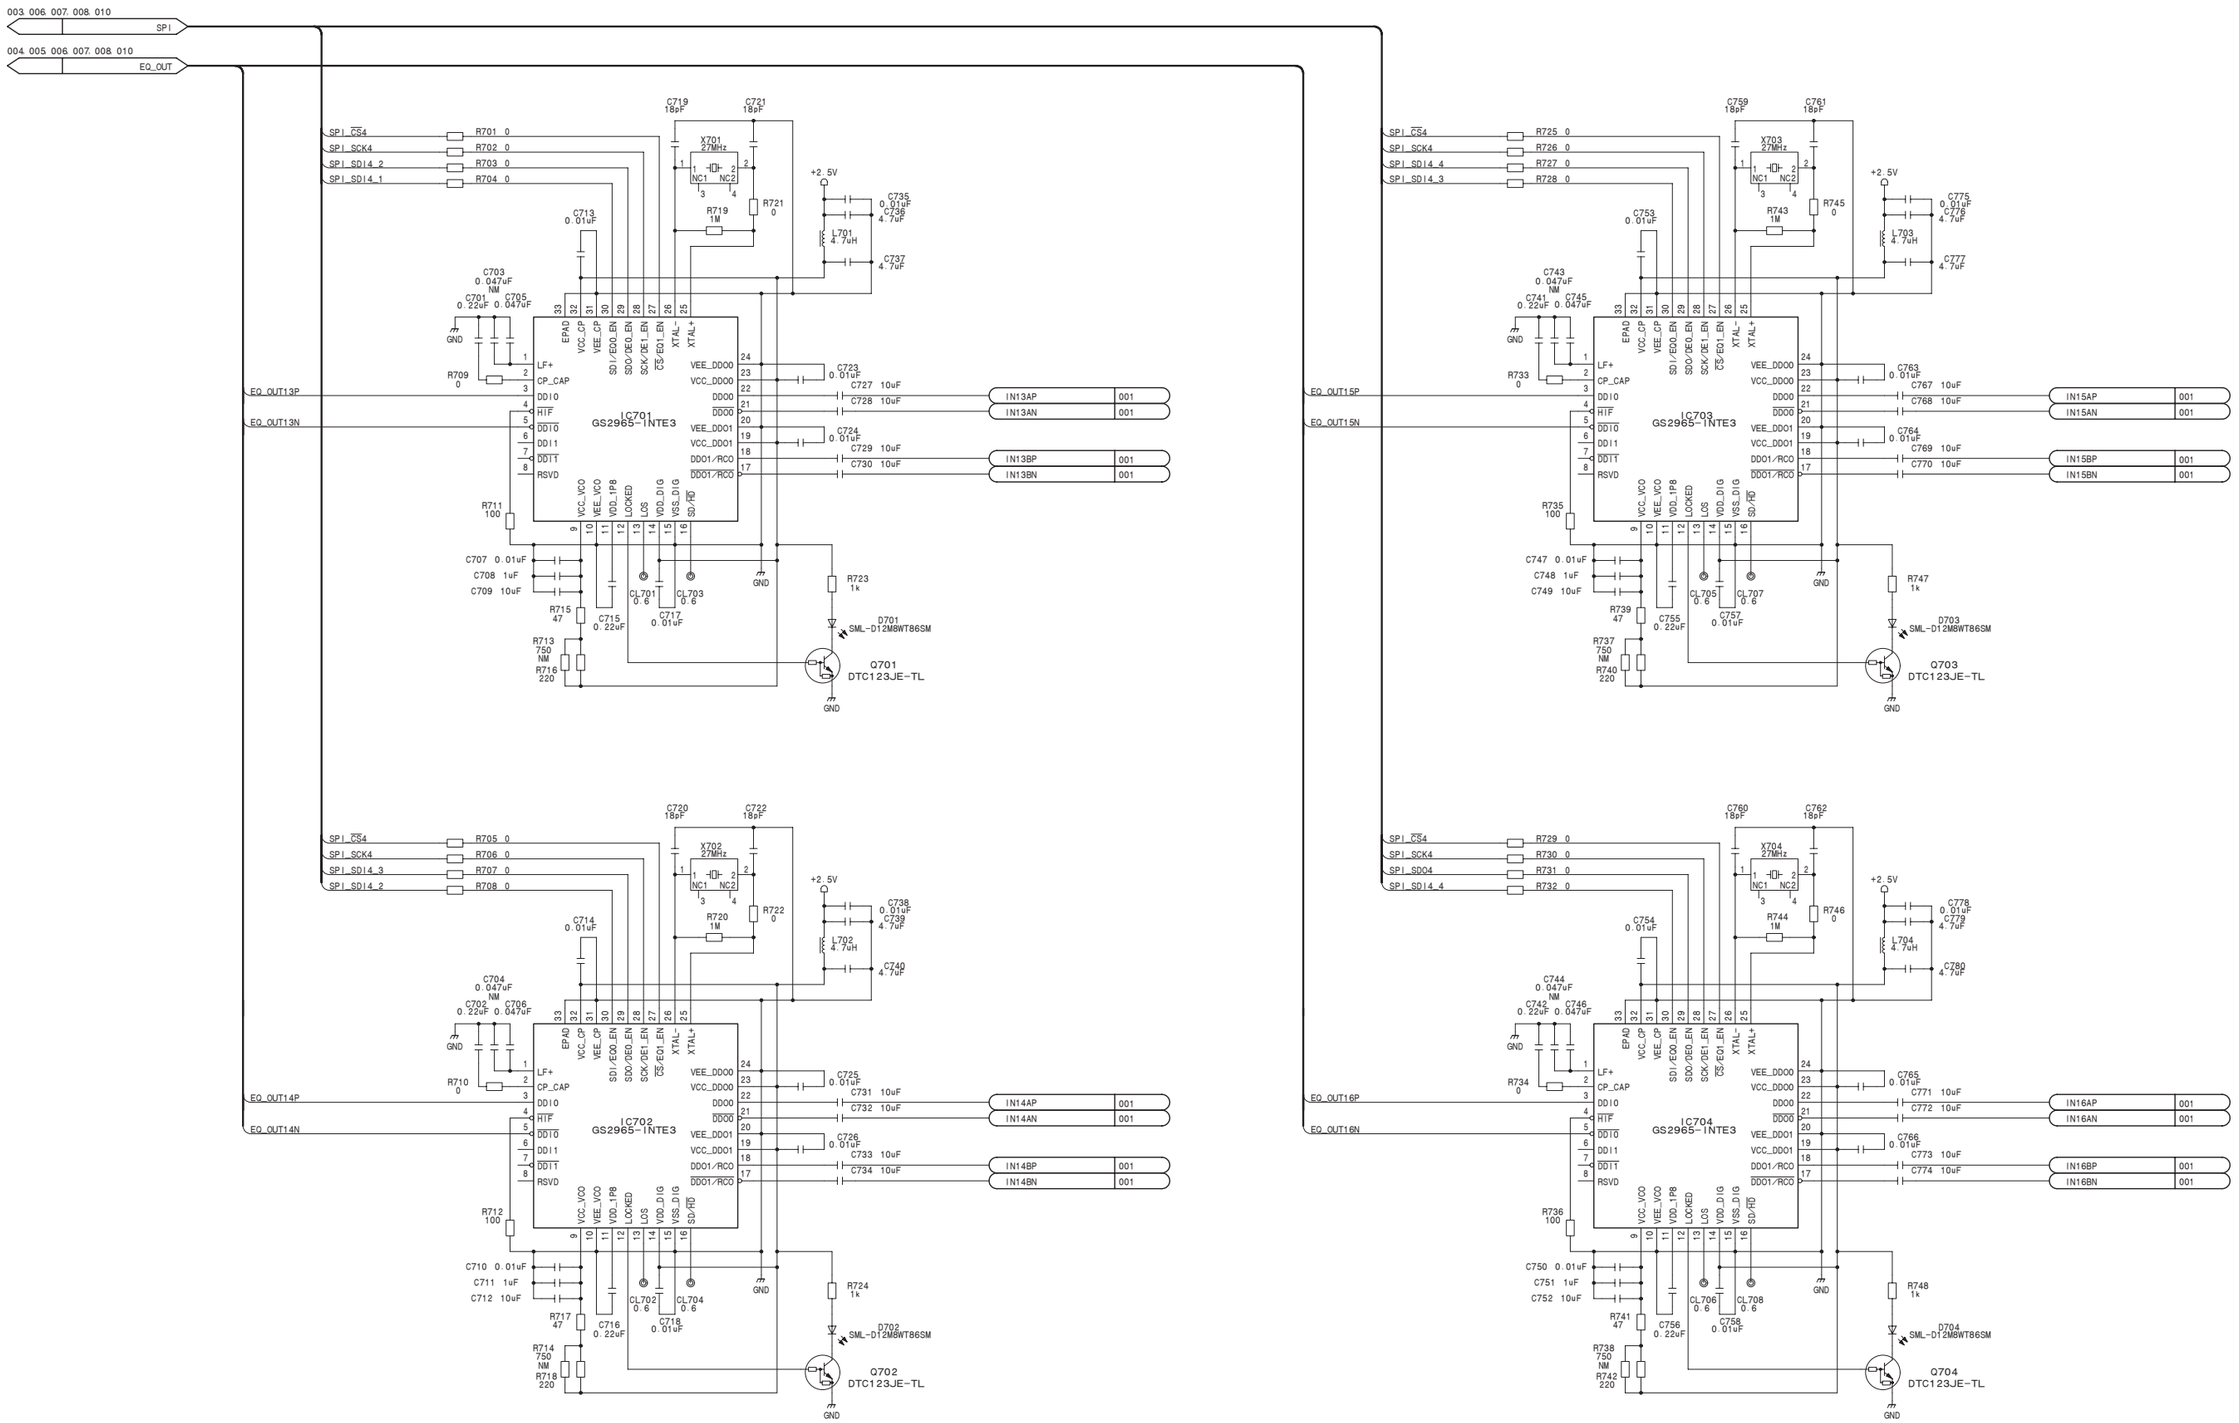

CNI-37A (9/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_9

A B C D E F G H

CNI-37A (10/10)
SUFFIX: -12

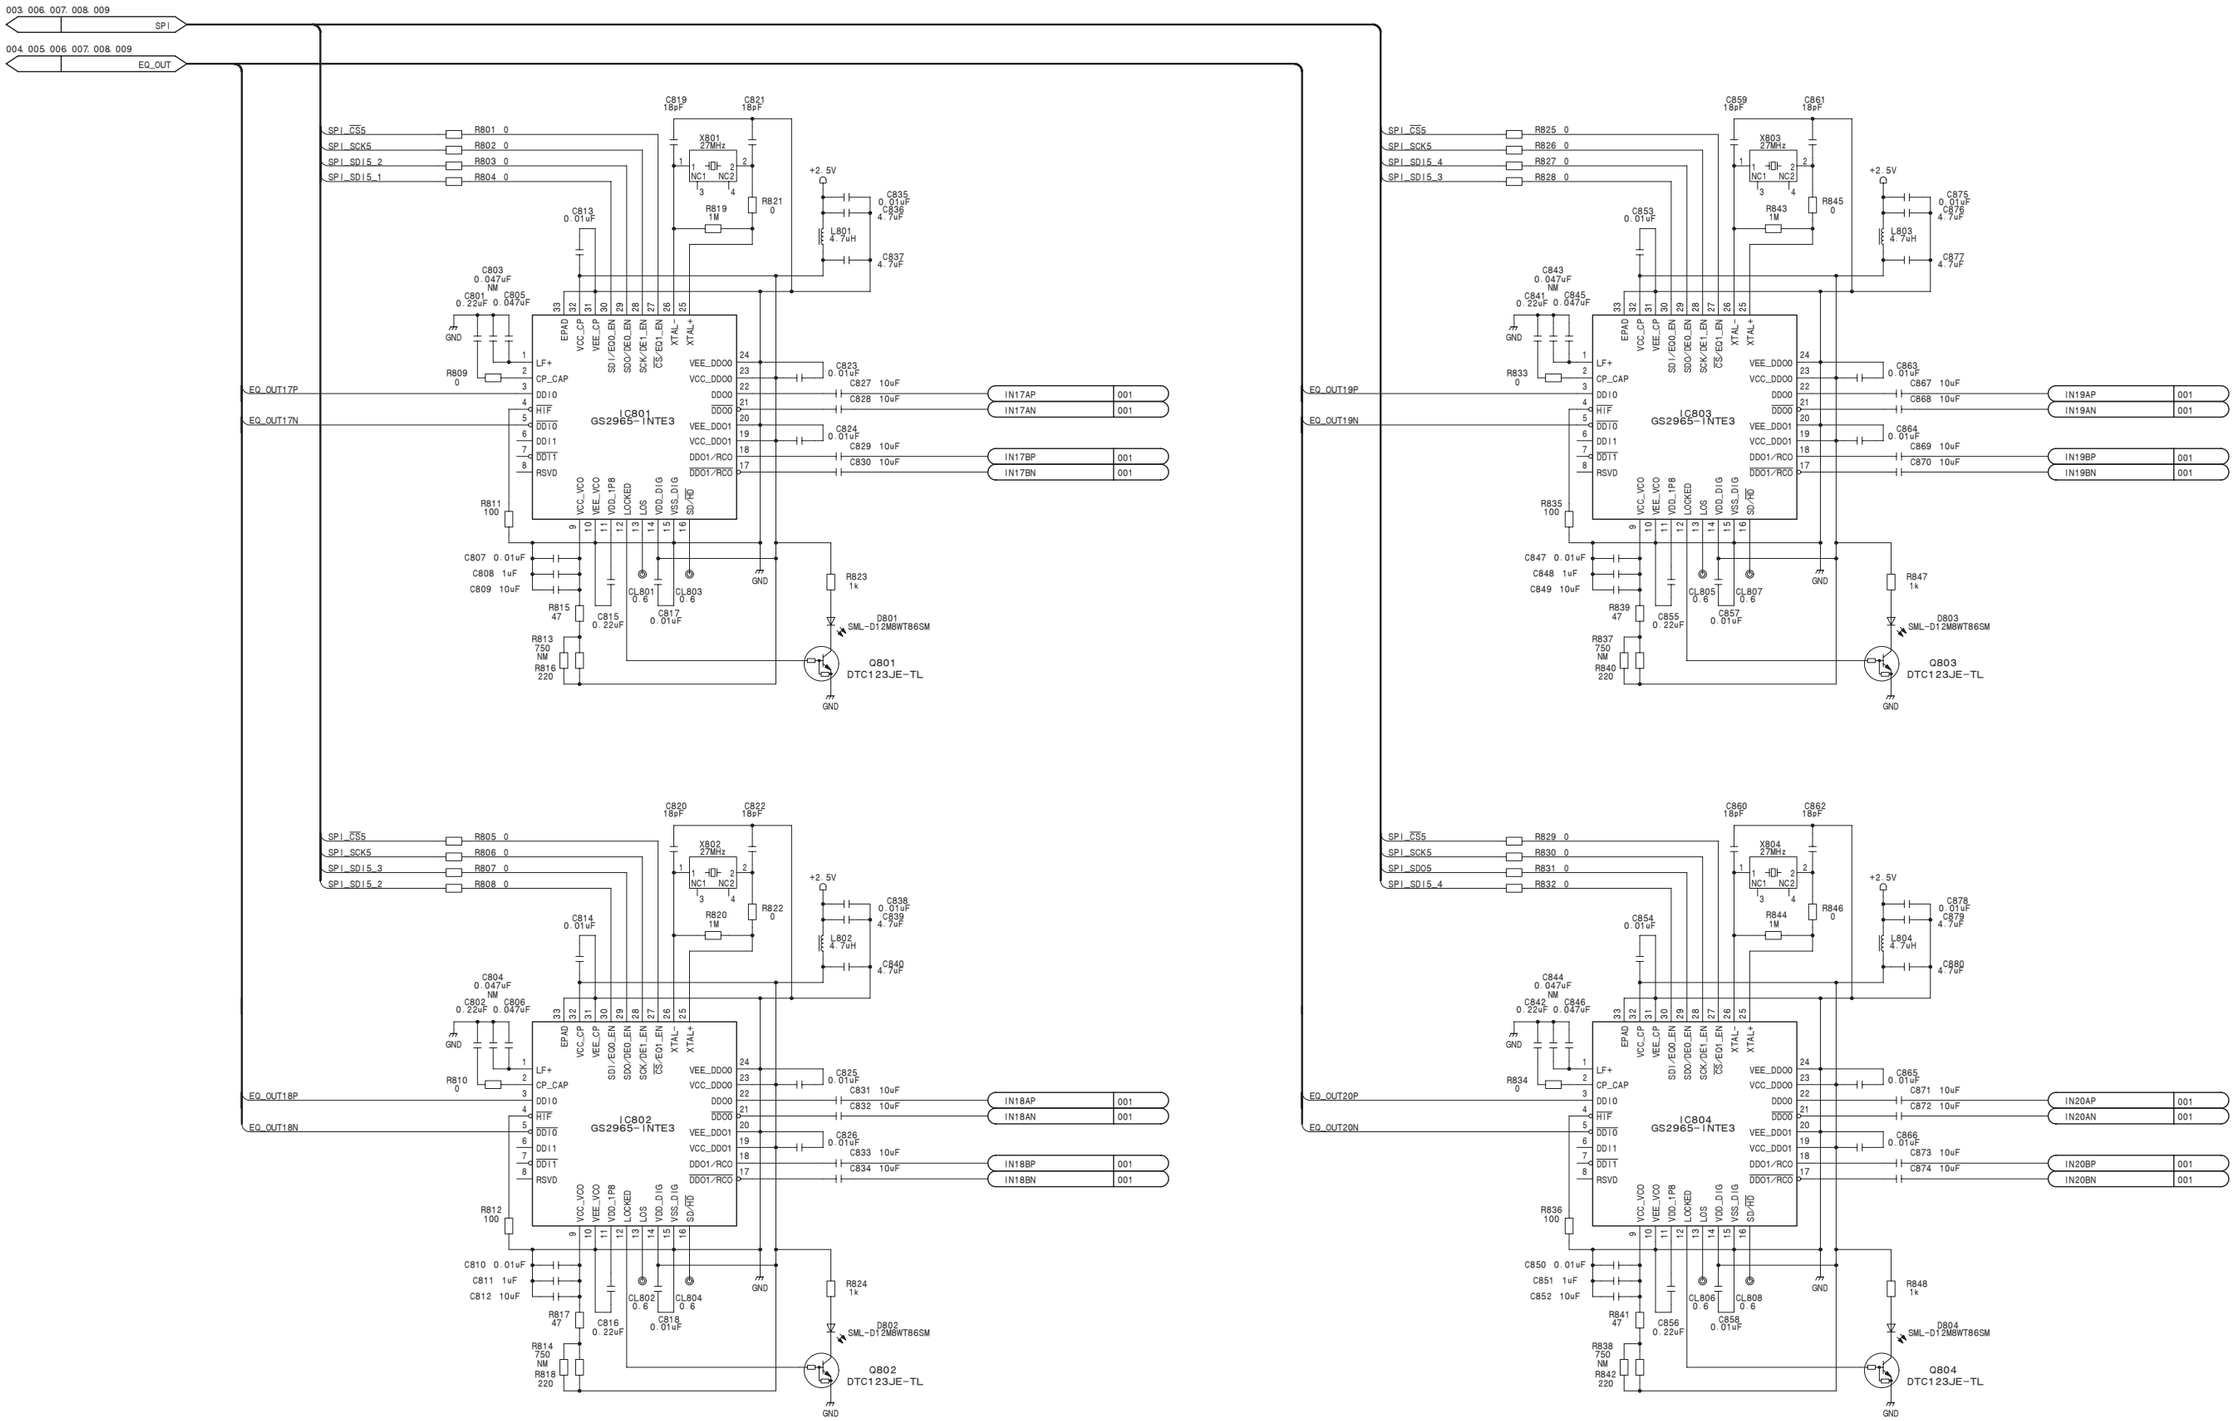

CNI-37A (10/10)
BOARD NO. 1-879-572-12
MVS-8000X_CNI-37A_002_10

4-118 (a)

A B C D E F G H

CNO-37 (1/7)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	(SLOT_No4)	(SLOT_No5)	GND	(SLOT_No6)	(SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	(SD/HD_1)	(SD/HD_2)	GND
6	(RESET)	(DC_ENBL)	GND	(SD/HD_0)	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-37 (1/7)
BOARD NO. 1-879-573-11
MVS-8000X_CNO-37_999_1

CNO-37 (2/7)
SUFFIX: -11

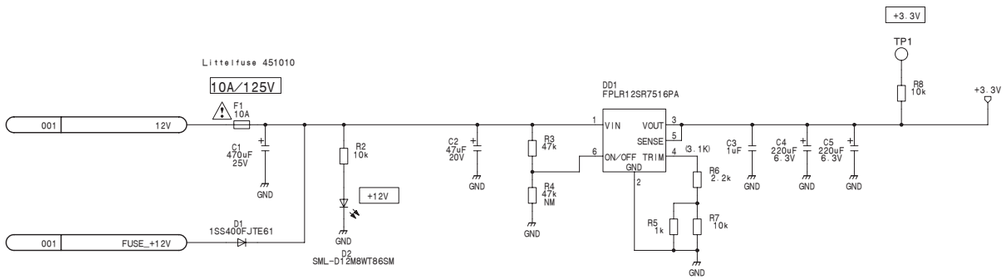

CNO-37 (2/7)

BOARD NO. 1-879-573-11
MVS-8000X_CNO-37_999_2

CNO-37 (3/7)
SUFFIX: -11

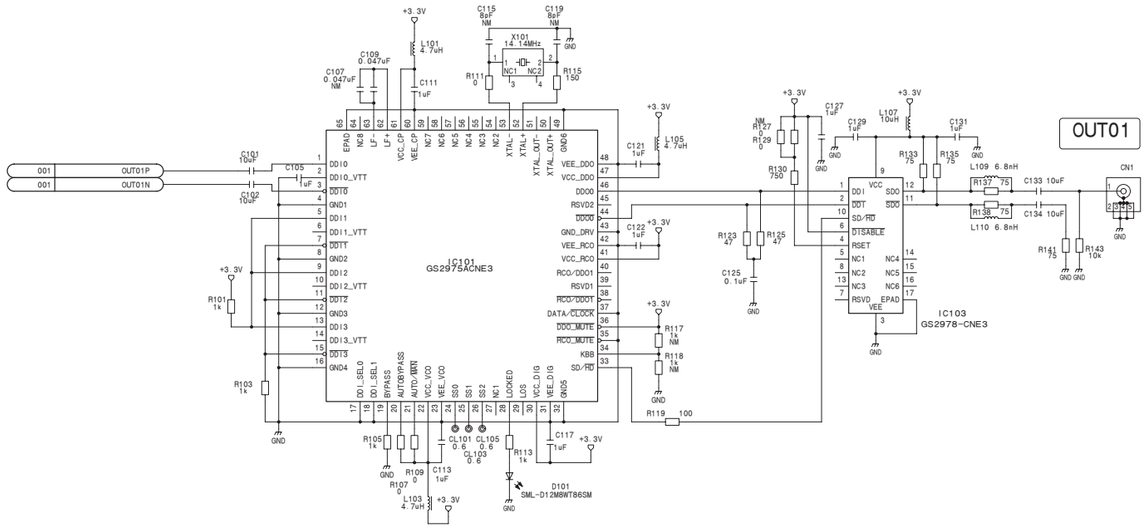

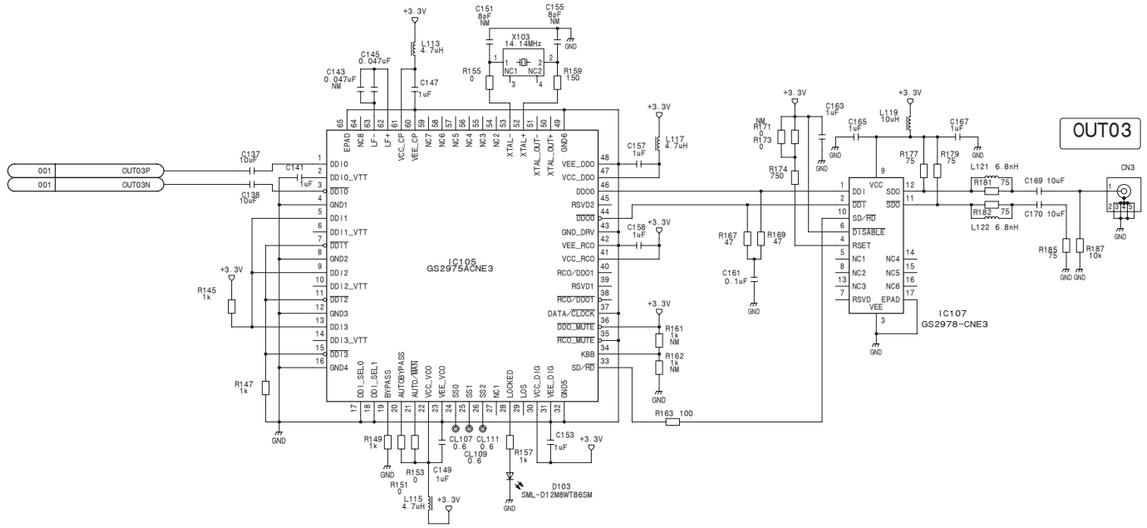

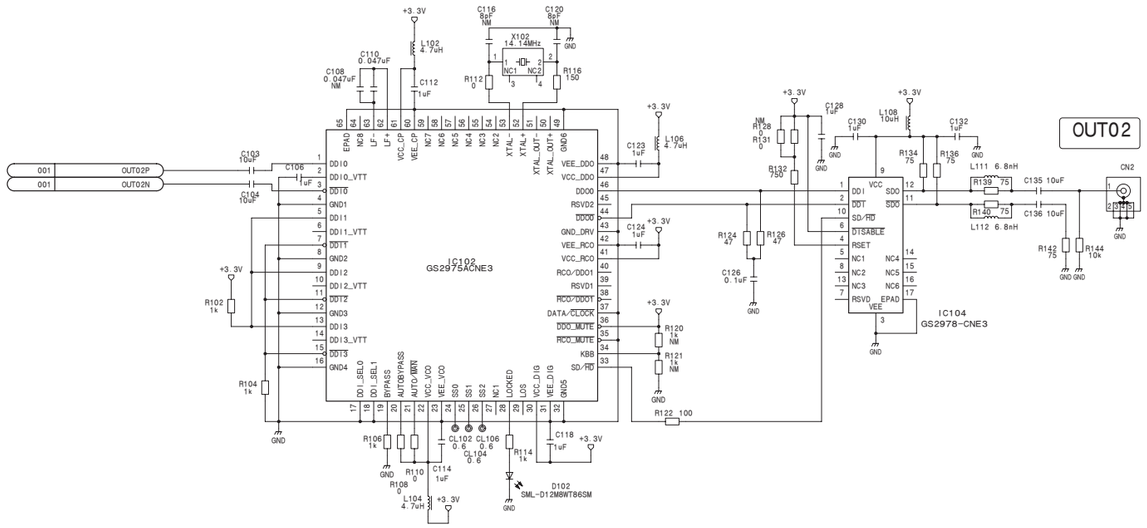

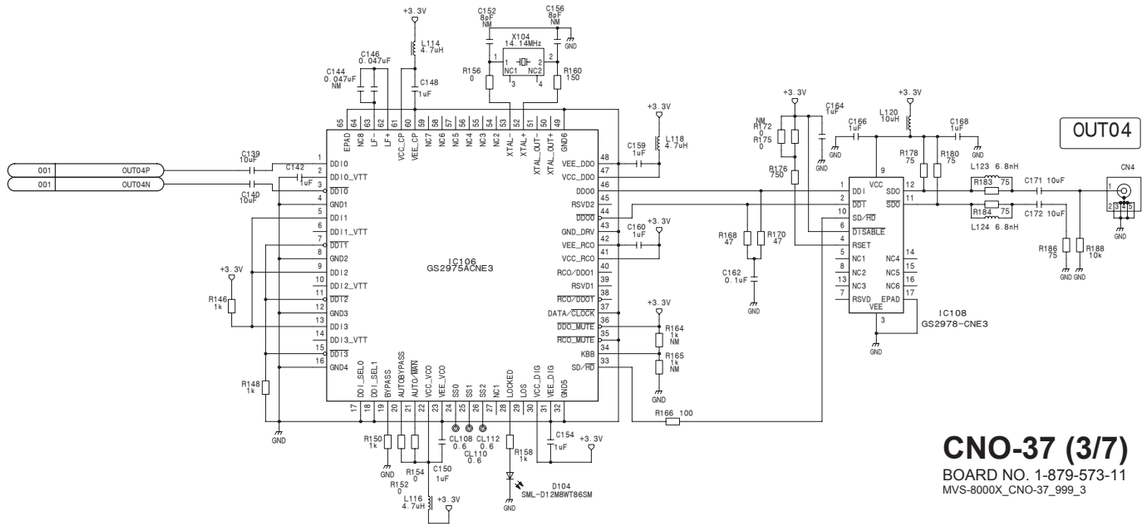

CNO-37 (3/7)
BOARD NO. 1-879-573-11
MVS-8000X_CNO-37_999_3

CNO-37 (4/7)
SUFFIX: -11

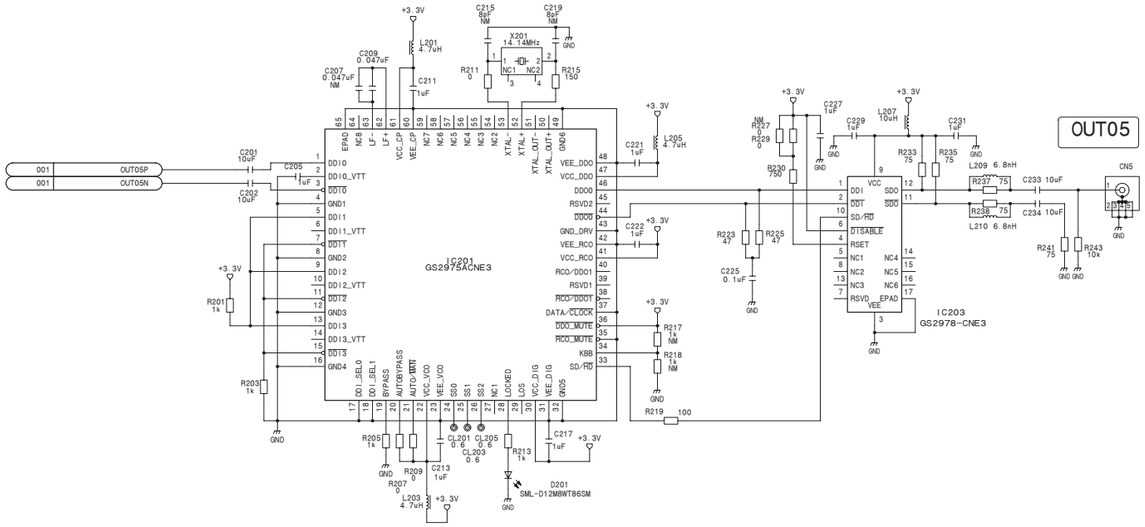

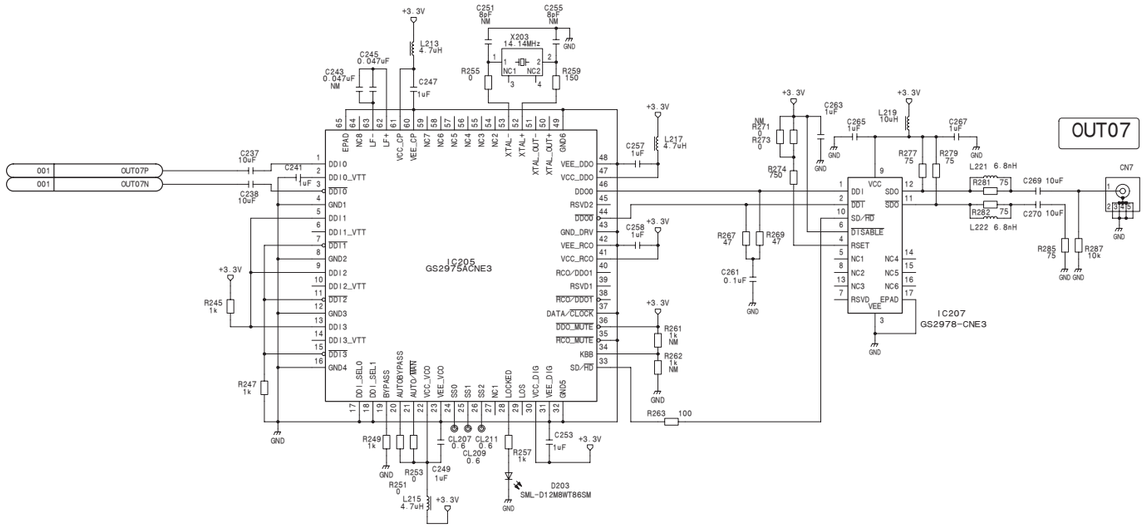

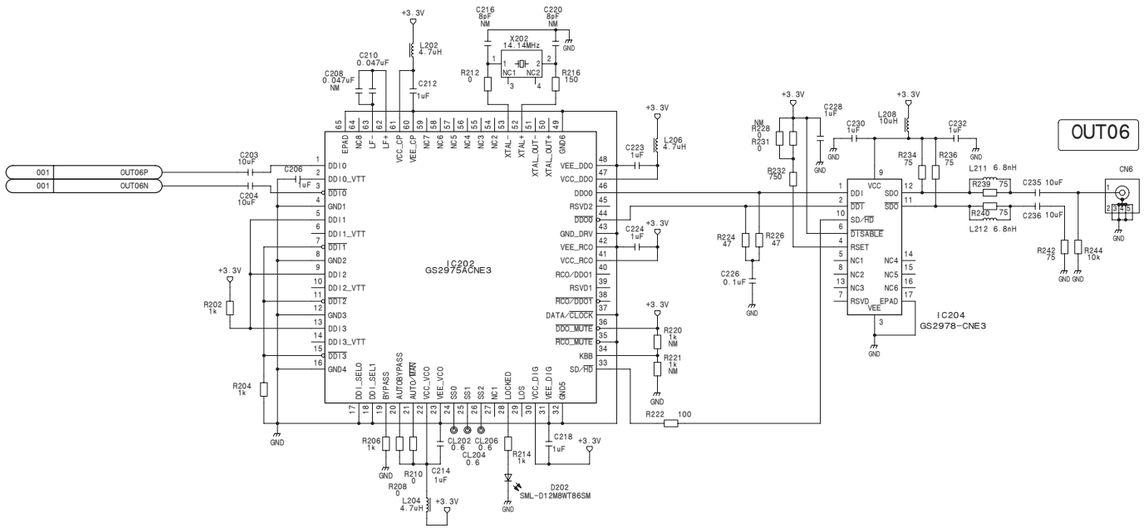

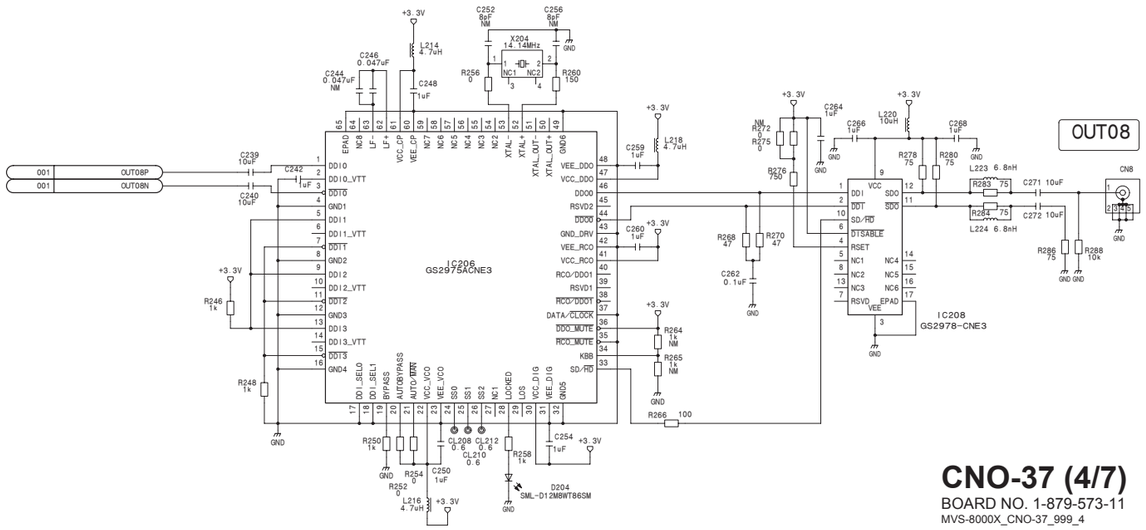

CNO-37 (4/7)
BOARD NO. 1-879-573-11
MVS-8000X_CNO-37_999_4

CNO-37 (5/7)

SUFFIX: -11

CNO-37 (5/7)

SUFFIX: -11

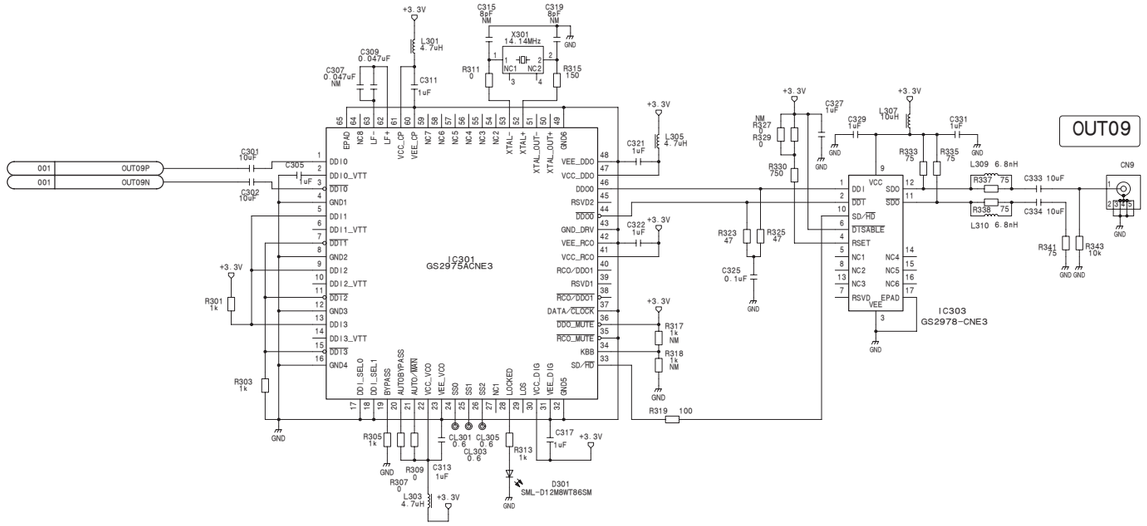

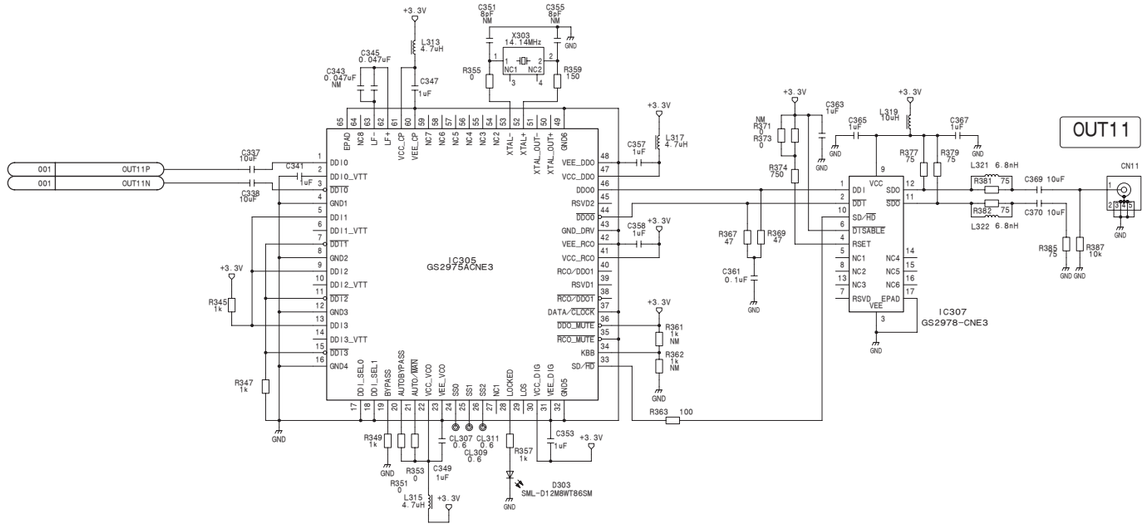

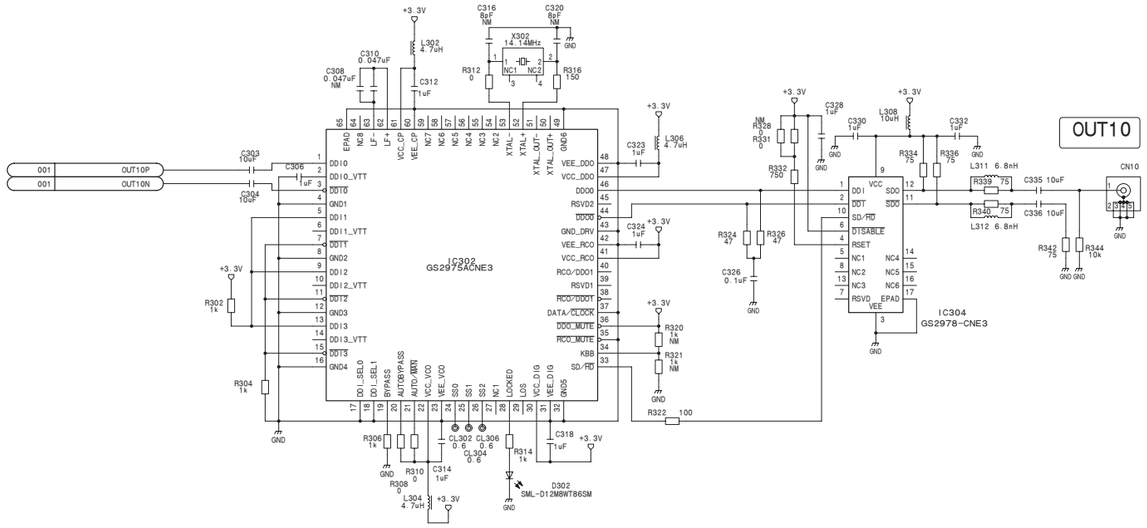

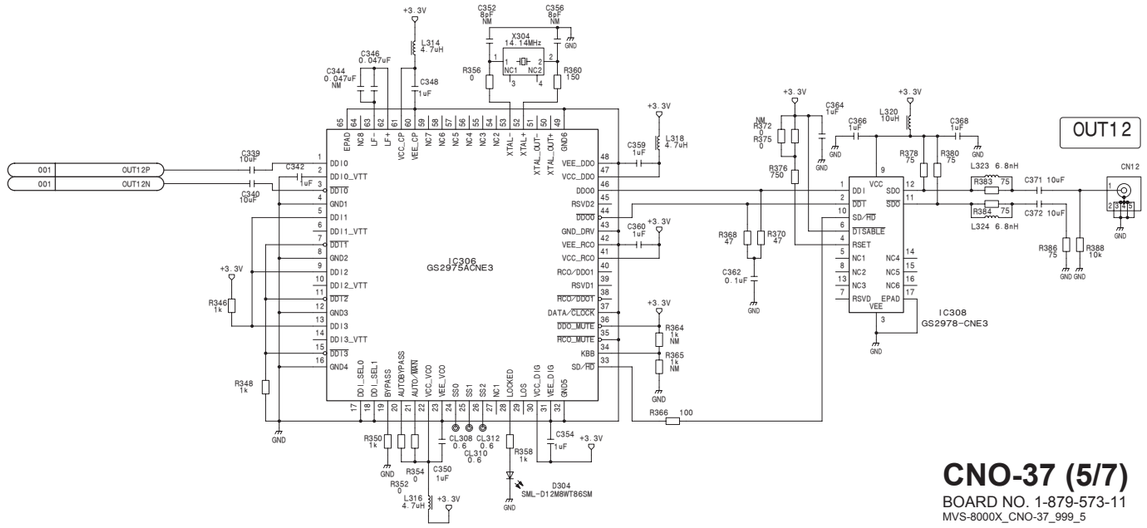

CNO-37 (5/7)

BOARD NO. 1-879-573-11

MVS-8000X_CNO-37_999_5

CNO-37 (6/7)

SUFFIX: -11

CNO-37 (6/7)

SUFFIX: -11

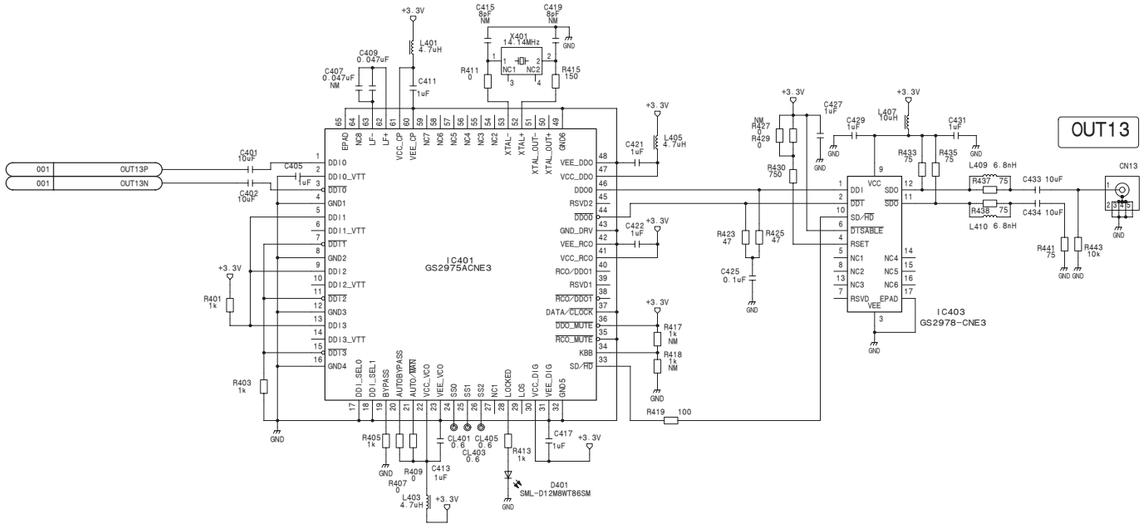

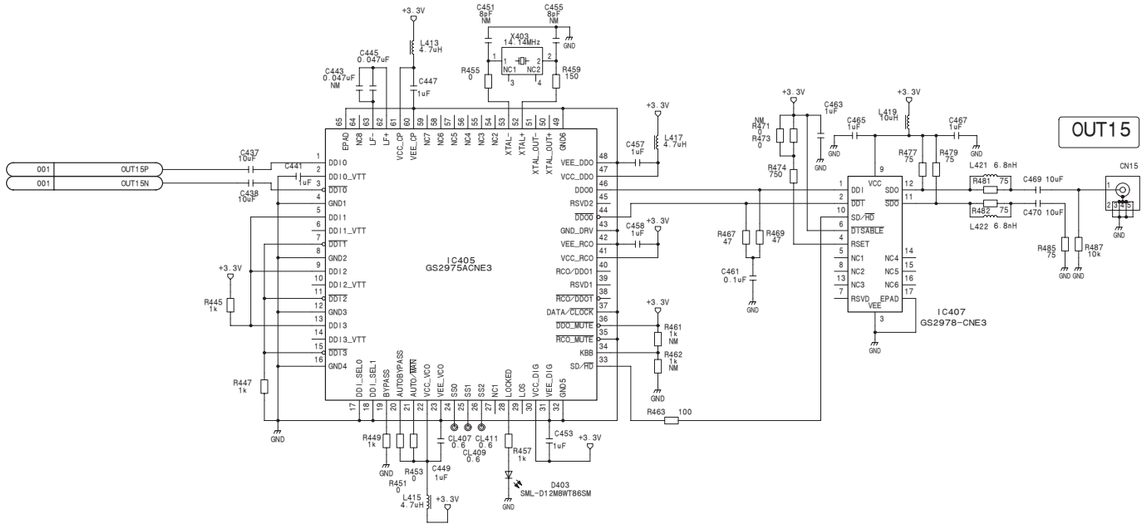

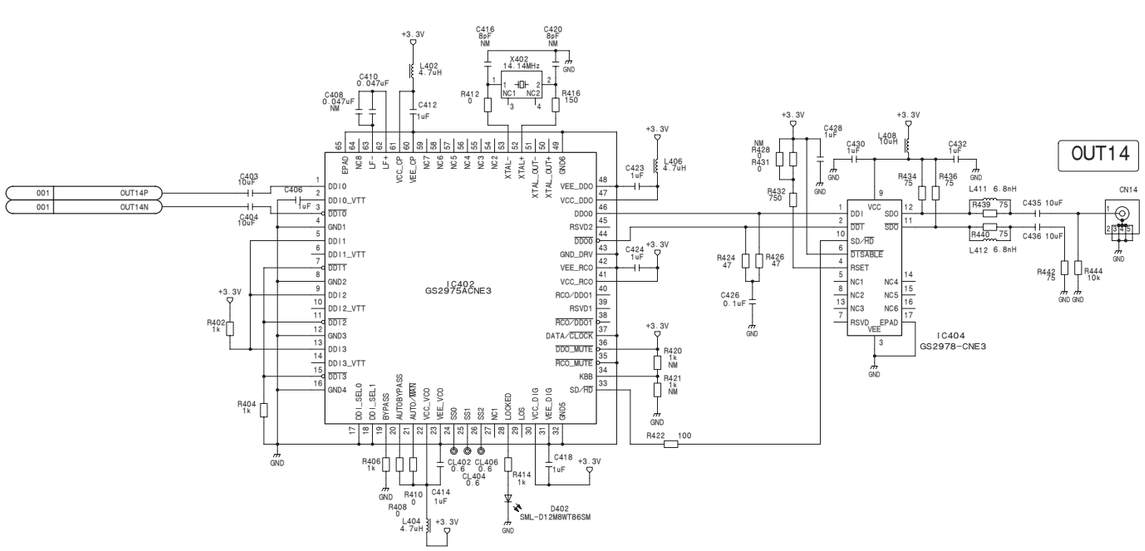

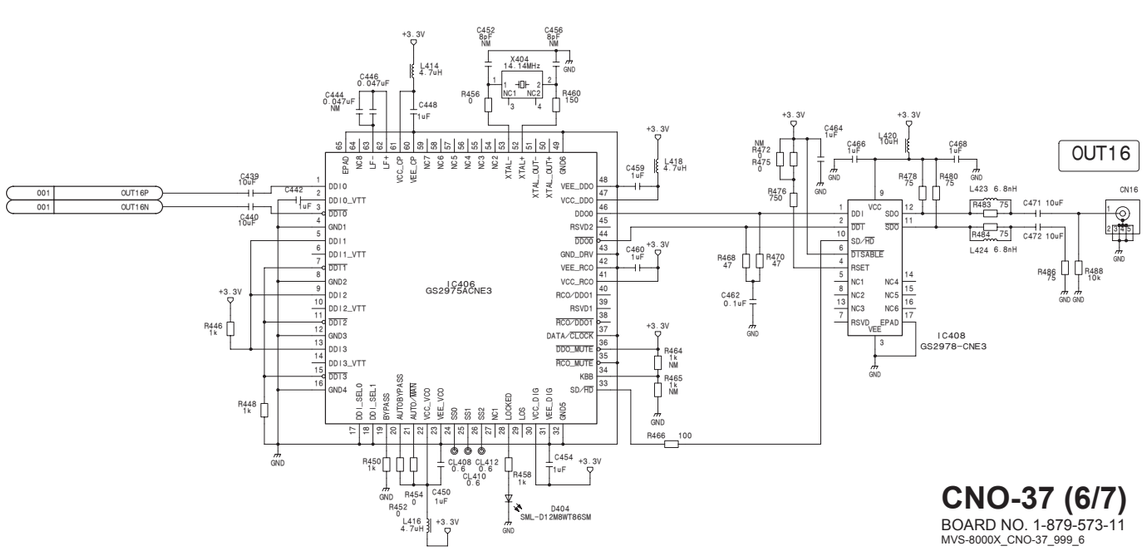

CNO-37 (6/7)

BOARD NO. 1-879-573-11

MVS-8000X_CNO-37_999_6

CNO-37 (7/7)
SUFFIX: -11

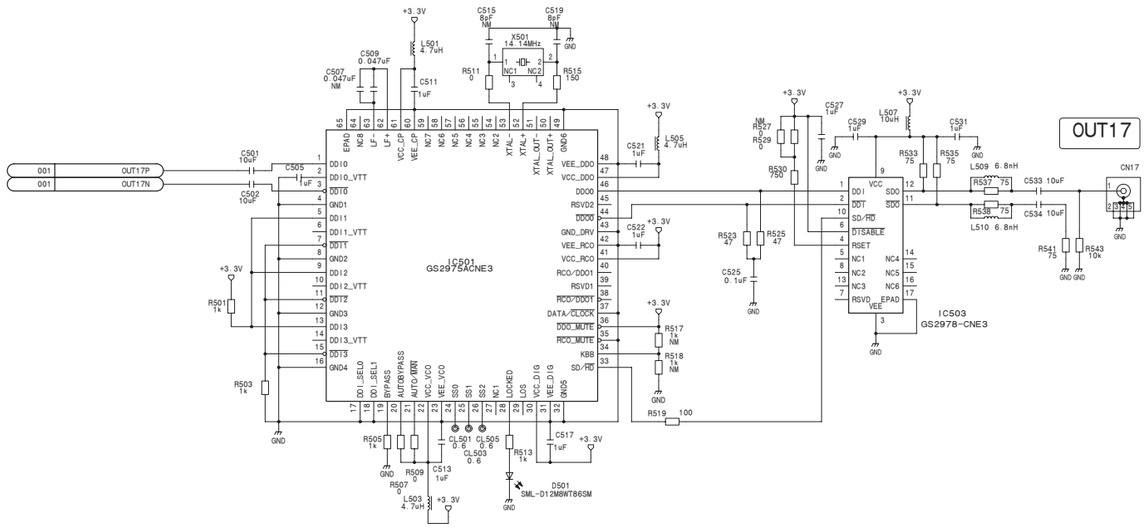

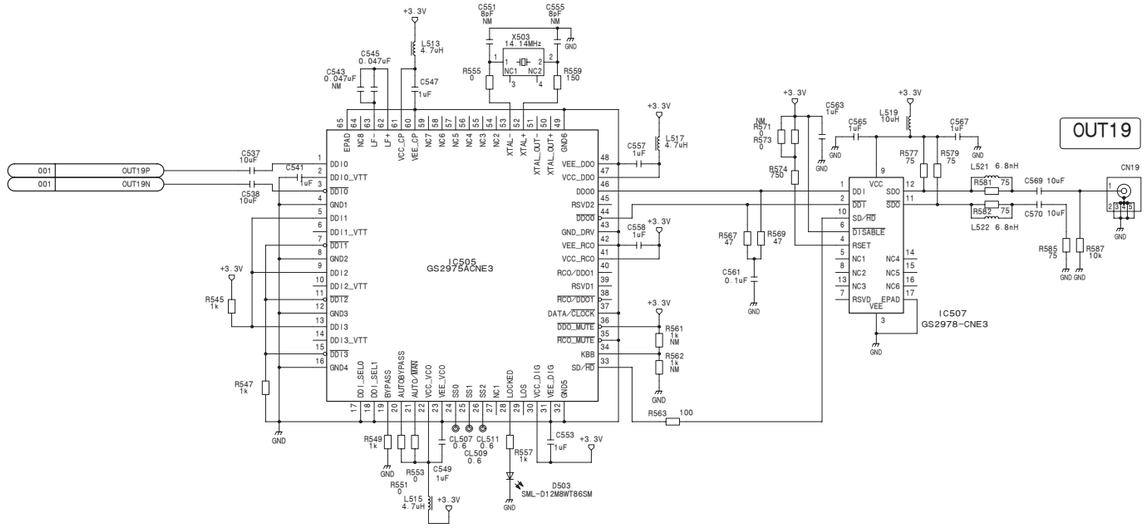

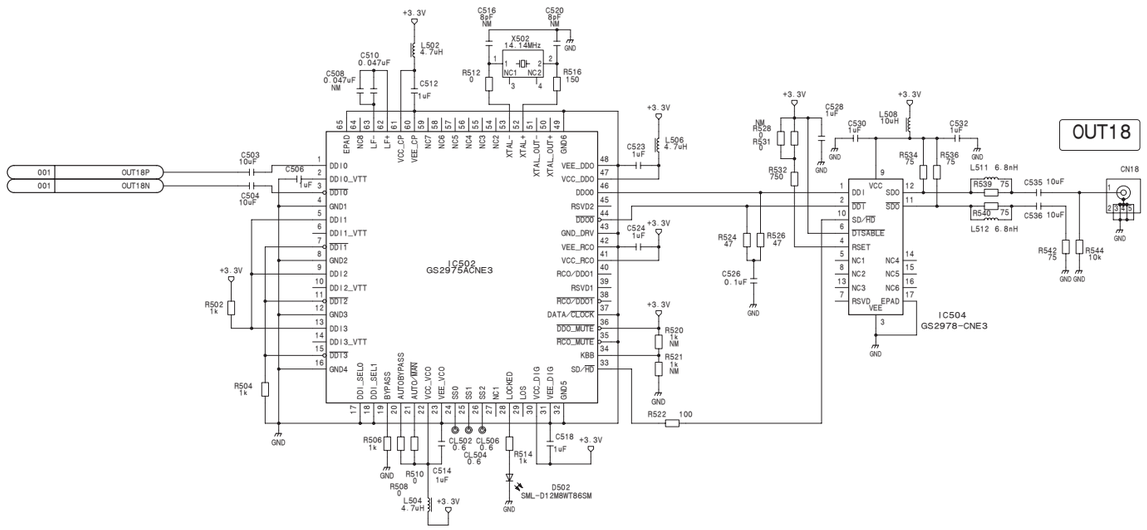

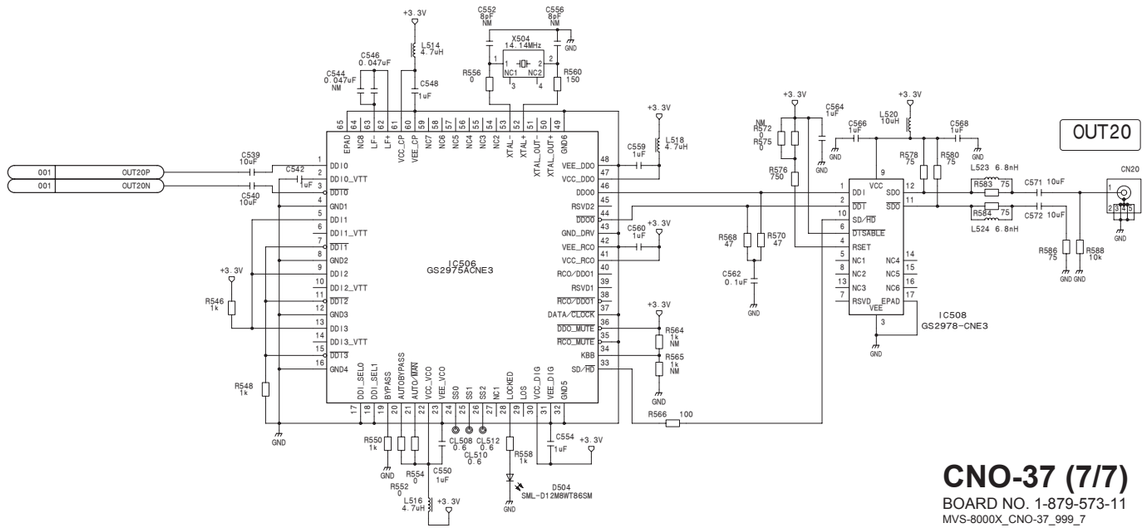

CNO-37 (7/7)
BOARD NO. 1-879-573-11
MVS-8000X_CNO-37_999_7

CNO-37 (1/8)
SUFFIX: -12

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	SLOT_No4	SLOT_No5	GND	SLOT_No6	SLOT_No7	GND
4	SLOT_No0	SLOT_No1	GND	SLOT_No2	SLOT_No3	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	(SD/$\overline{HD}$_1)	(SD/$\overline{HD}$_2)	GND
6	RESET	(DC_ENBL)	GND	(SD/$\overline{HD}$_0)	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-37 (1/8)

BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_1

4-119 (a)

A B C D E F G H

CNO-37 (2/8)
SUFFIX: -12

CNO-37 (2/8)
SUFFIX: -12

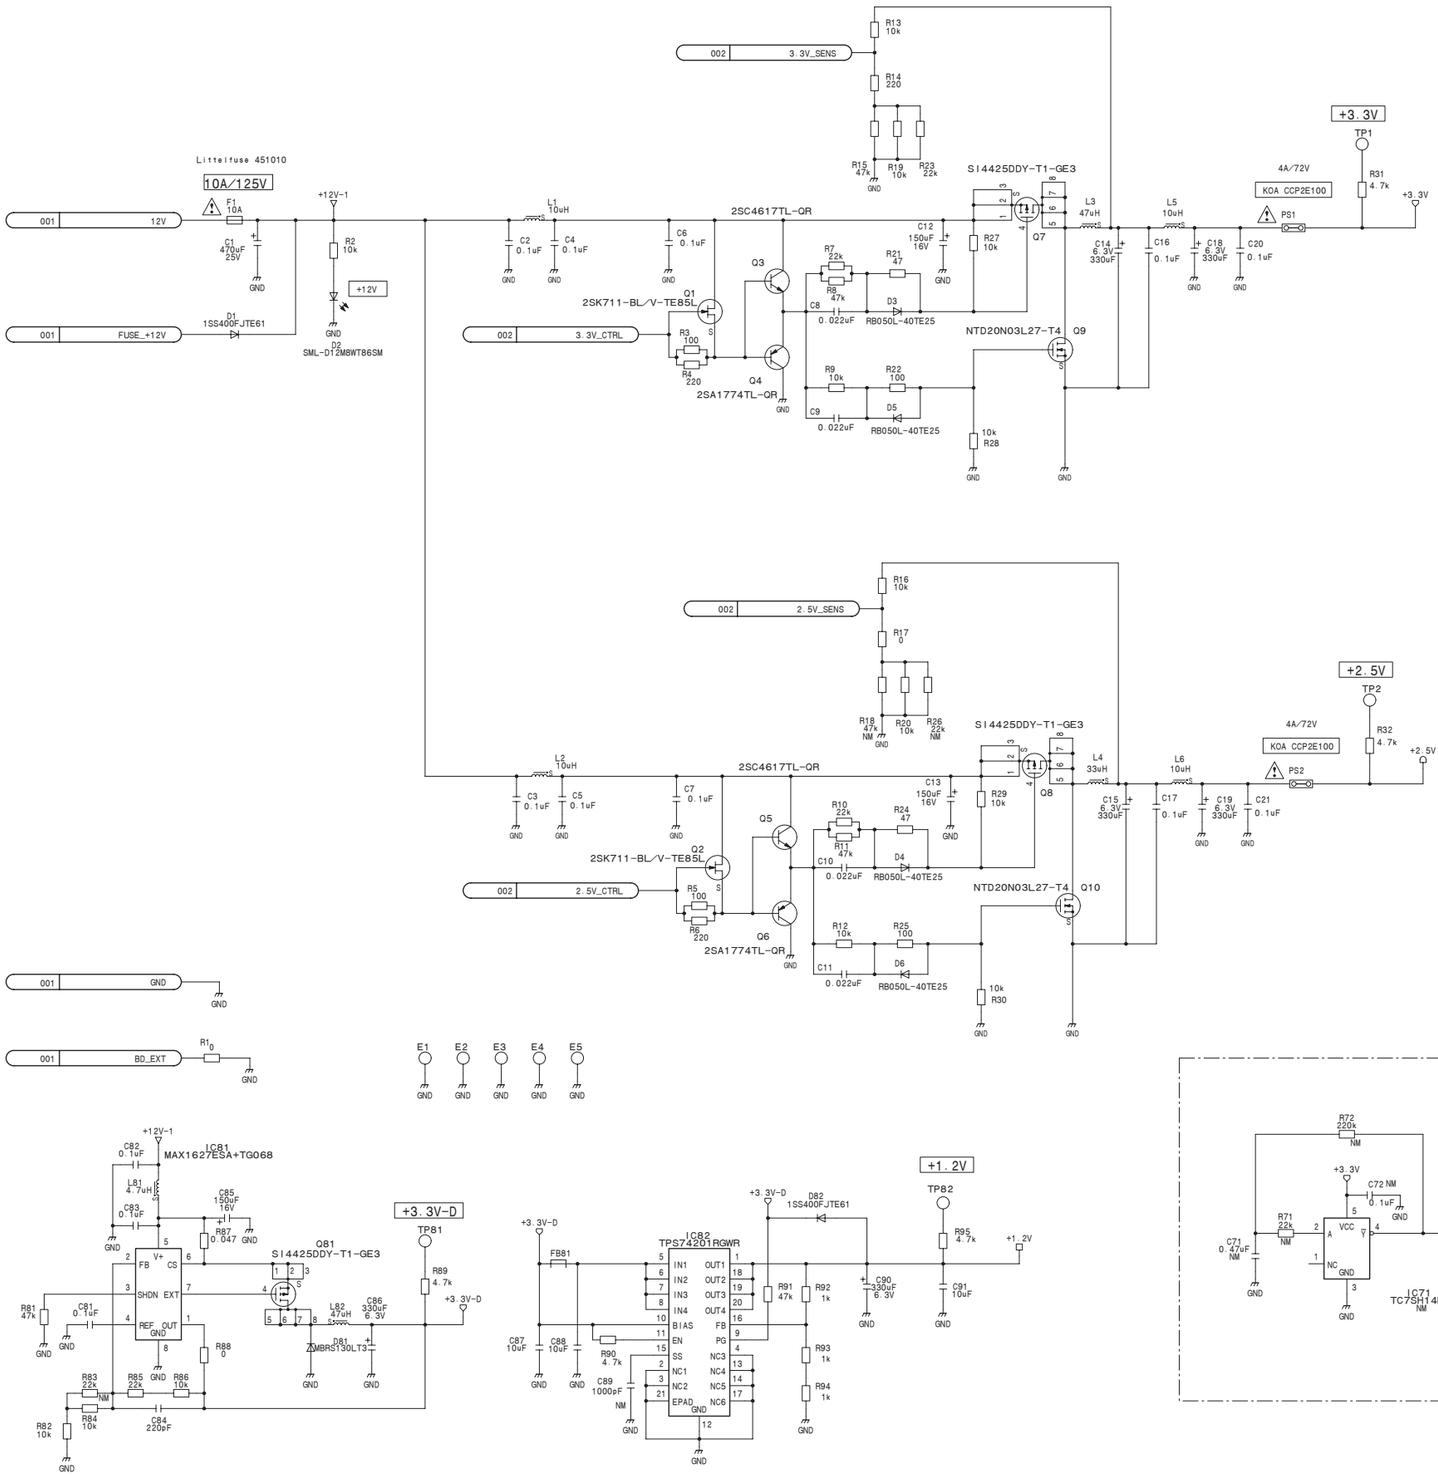

CNO-37 (2/8)
BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_2

CNO-37 (3/8)
SUFFIX: -12

CNO-37 (3/8)
SUFFIX: -12

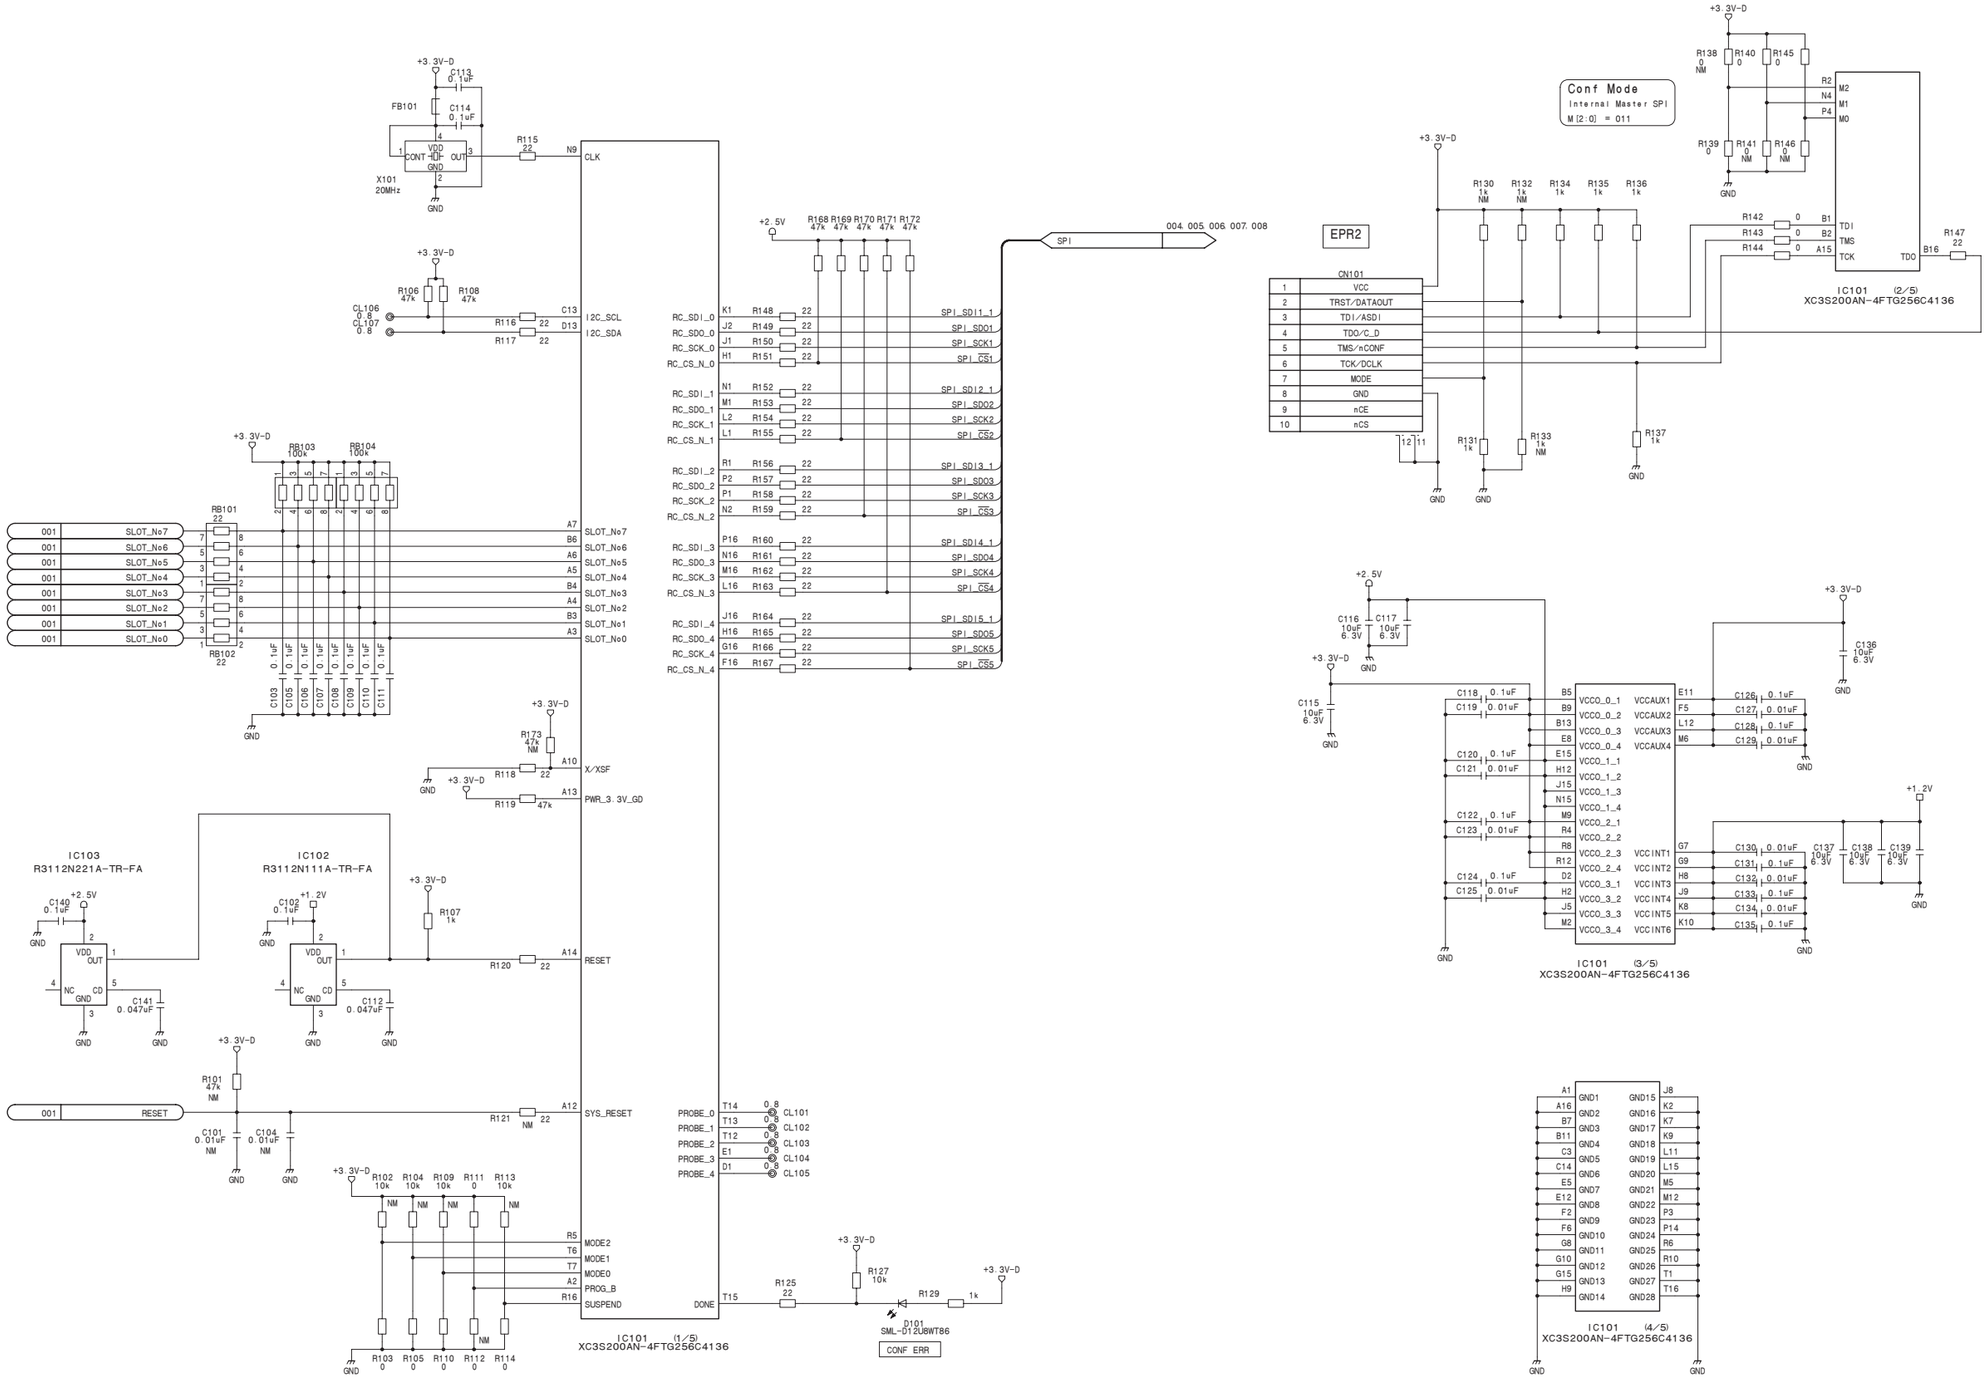

CNO-37 (3/8)
BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_3

CNO-37 (4/8)
SUFFIX: -12

CNO-37 (4/8)
SUFFIX: -12

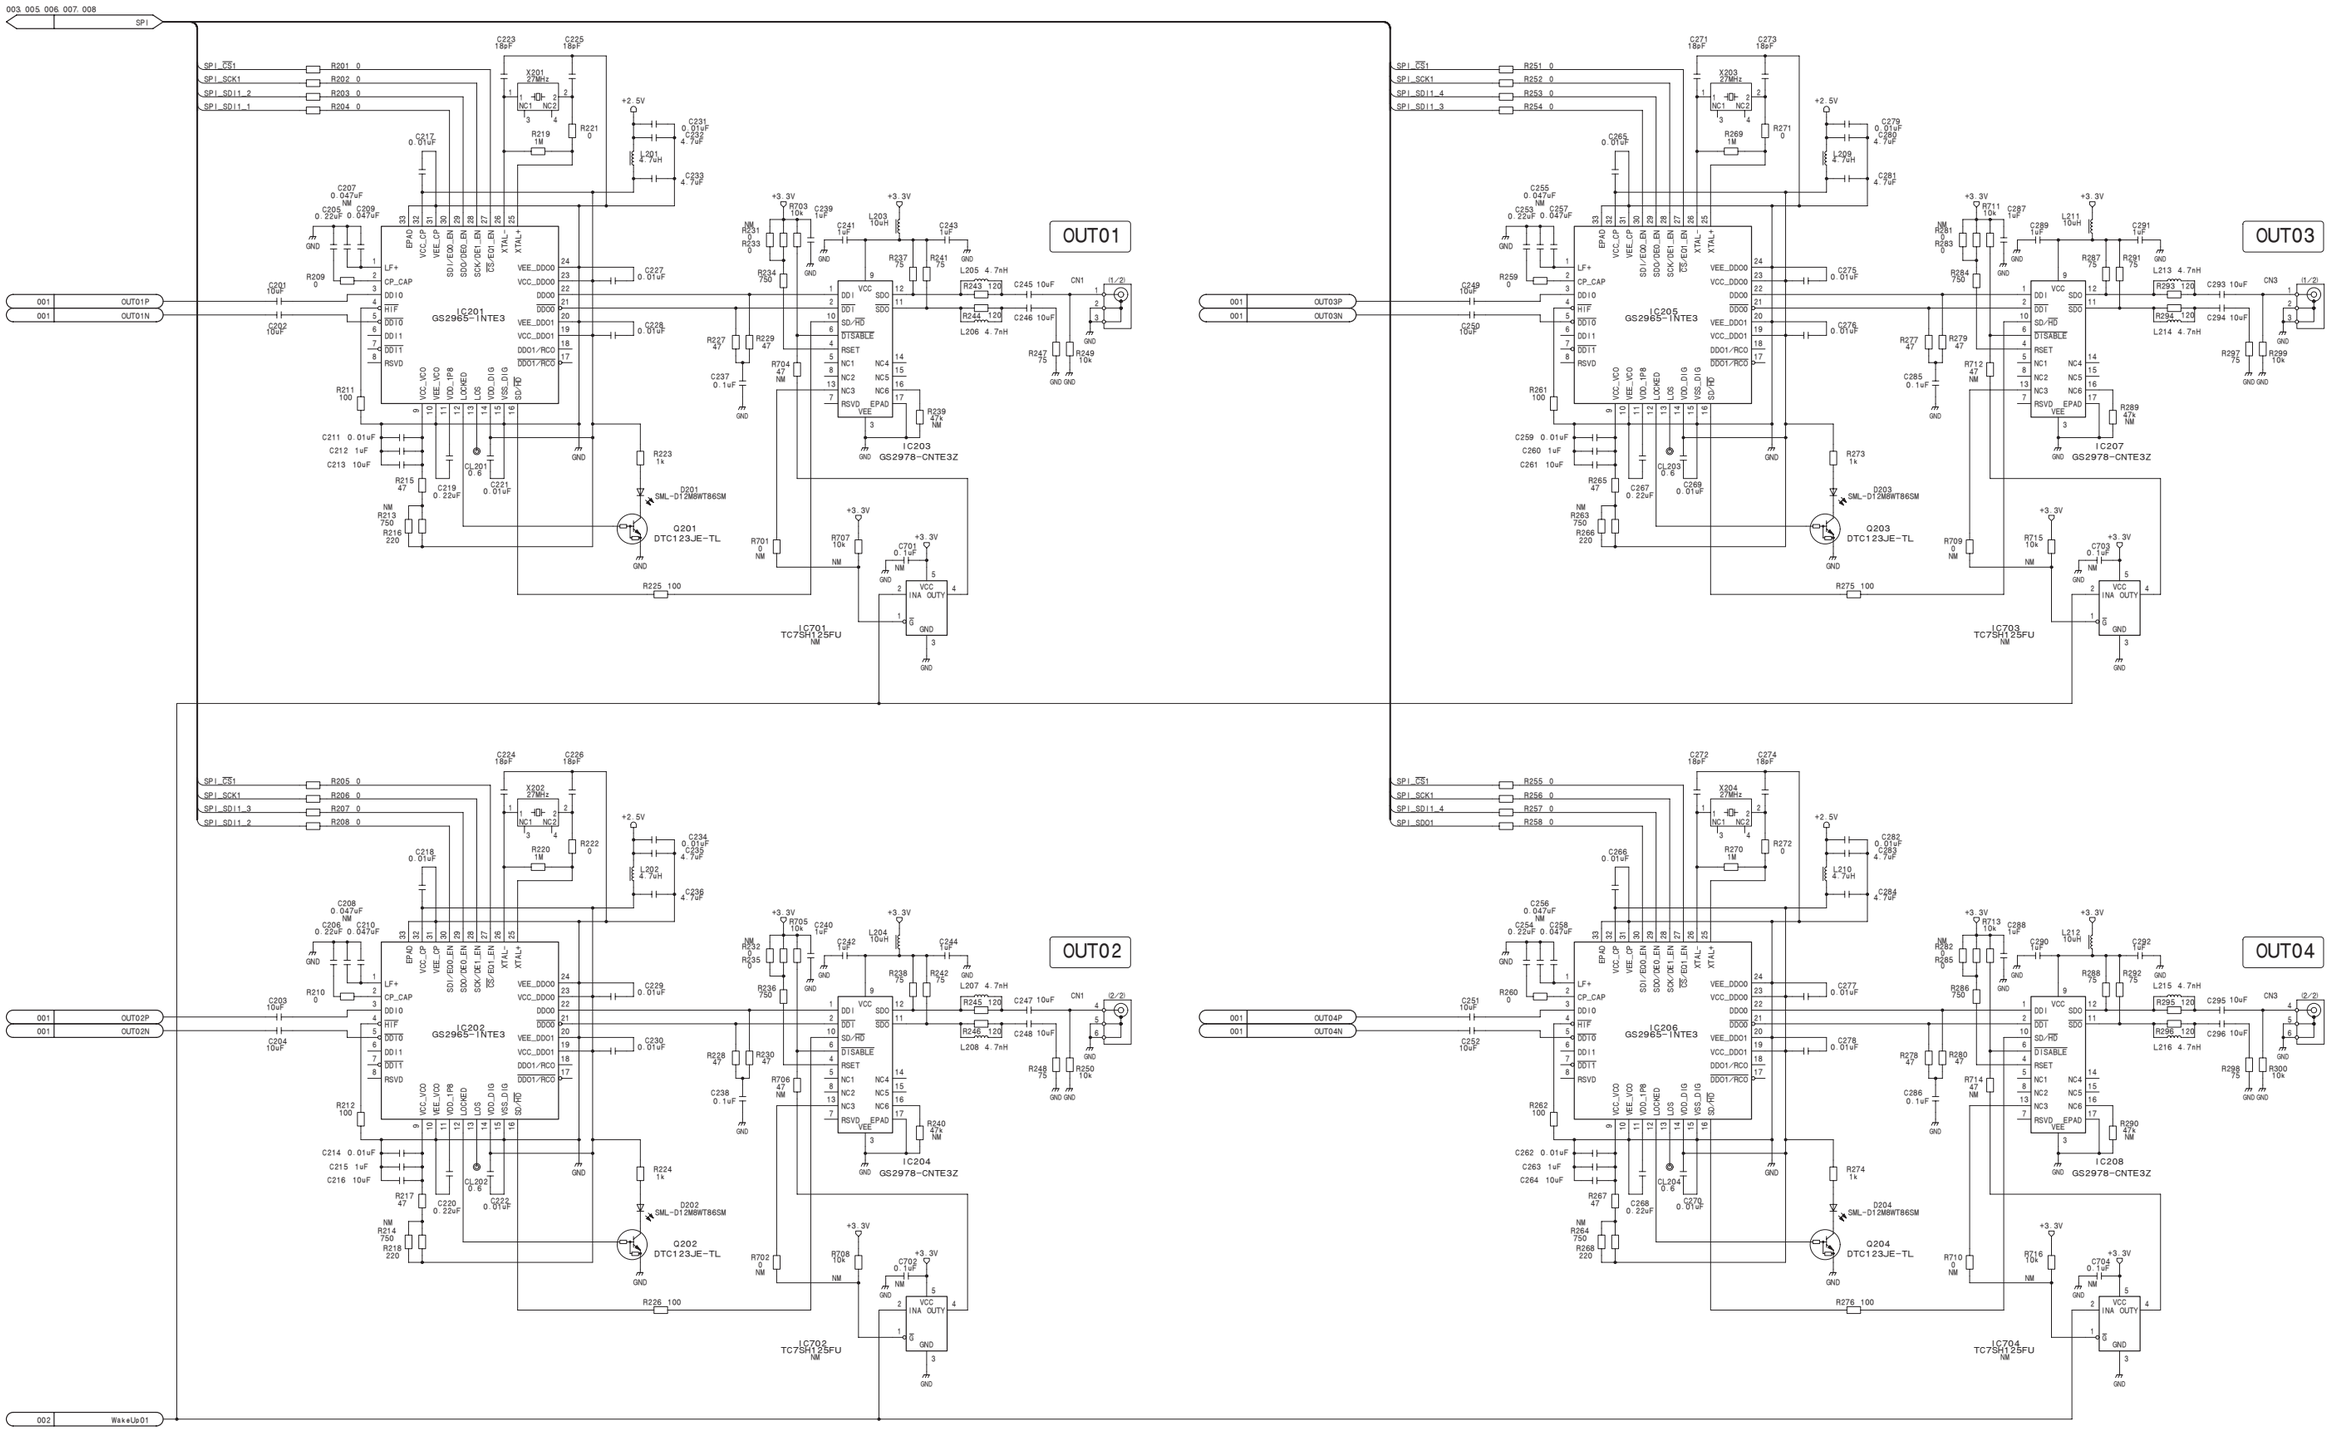

CNO-37 (4/8)
BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_4

CNO-37 (5/8)

SUFFIX: -12

CNO-37 (5/8)

SUFFIX: -12

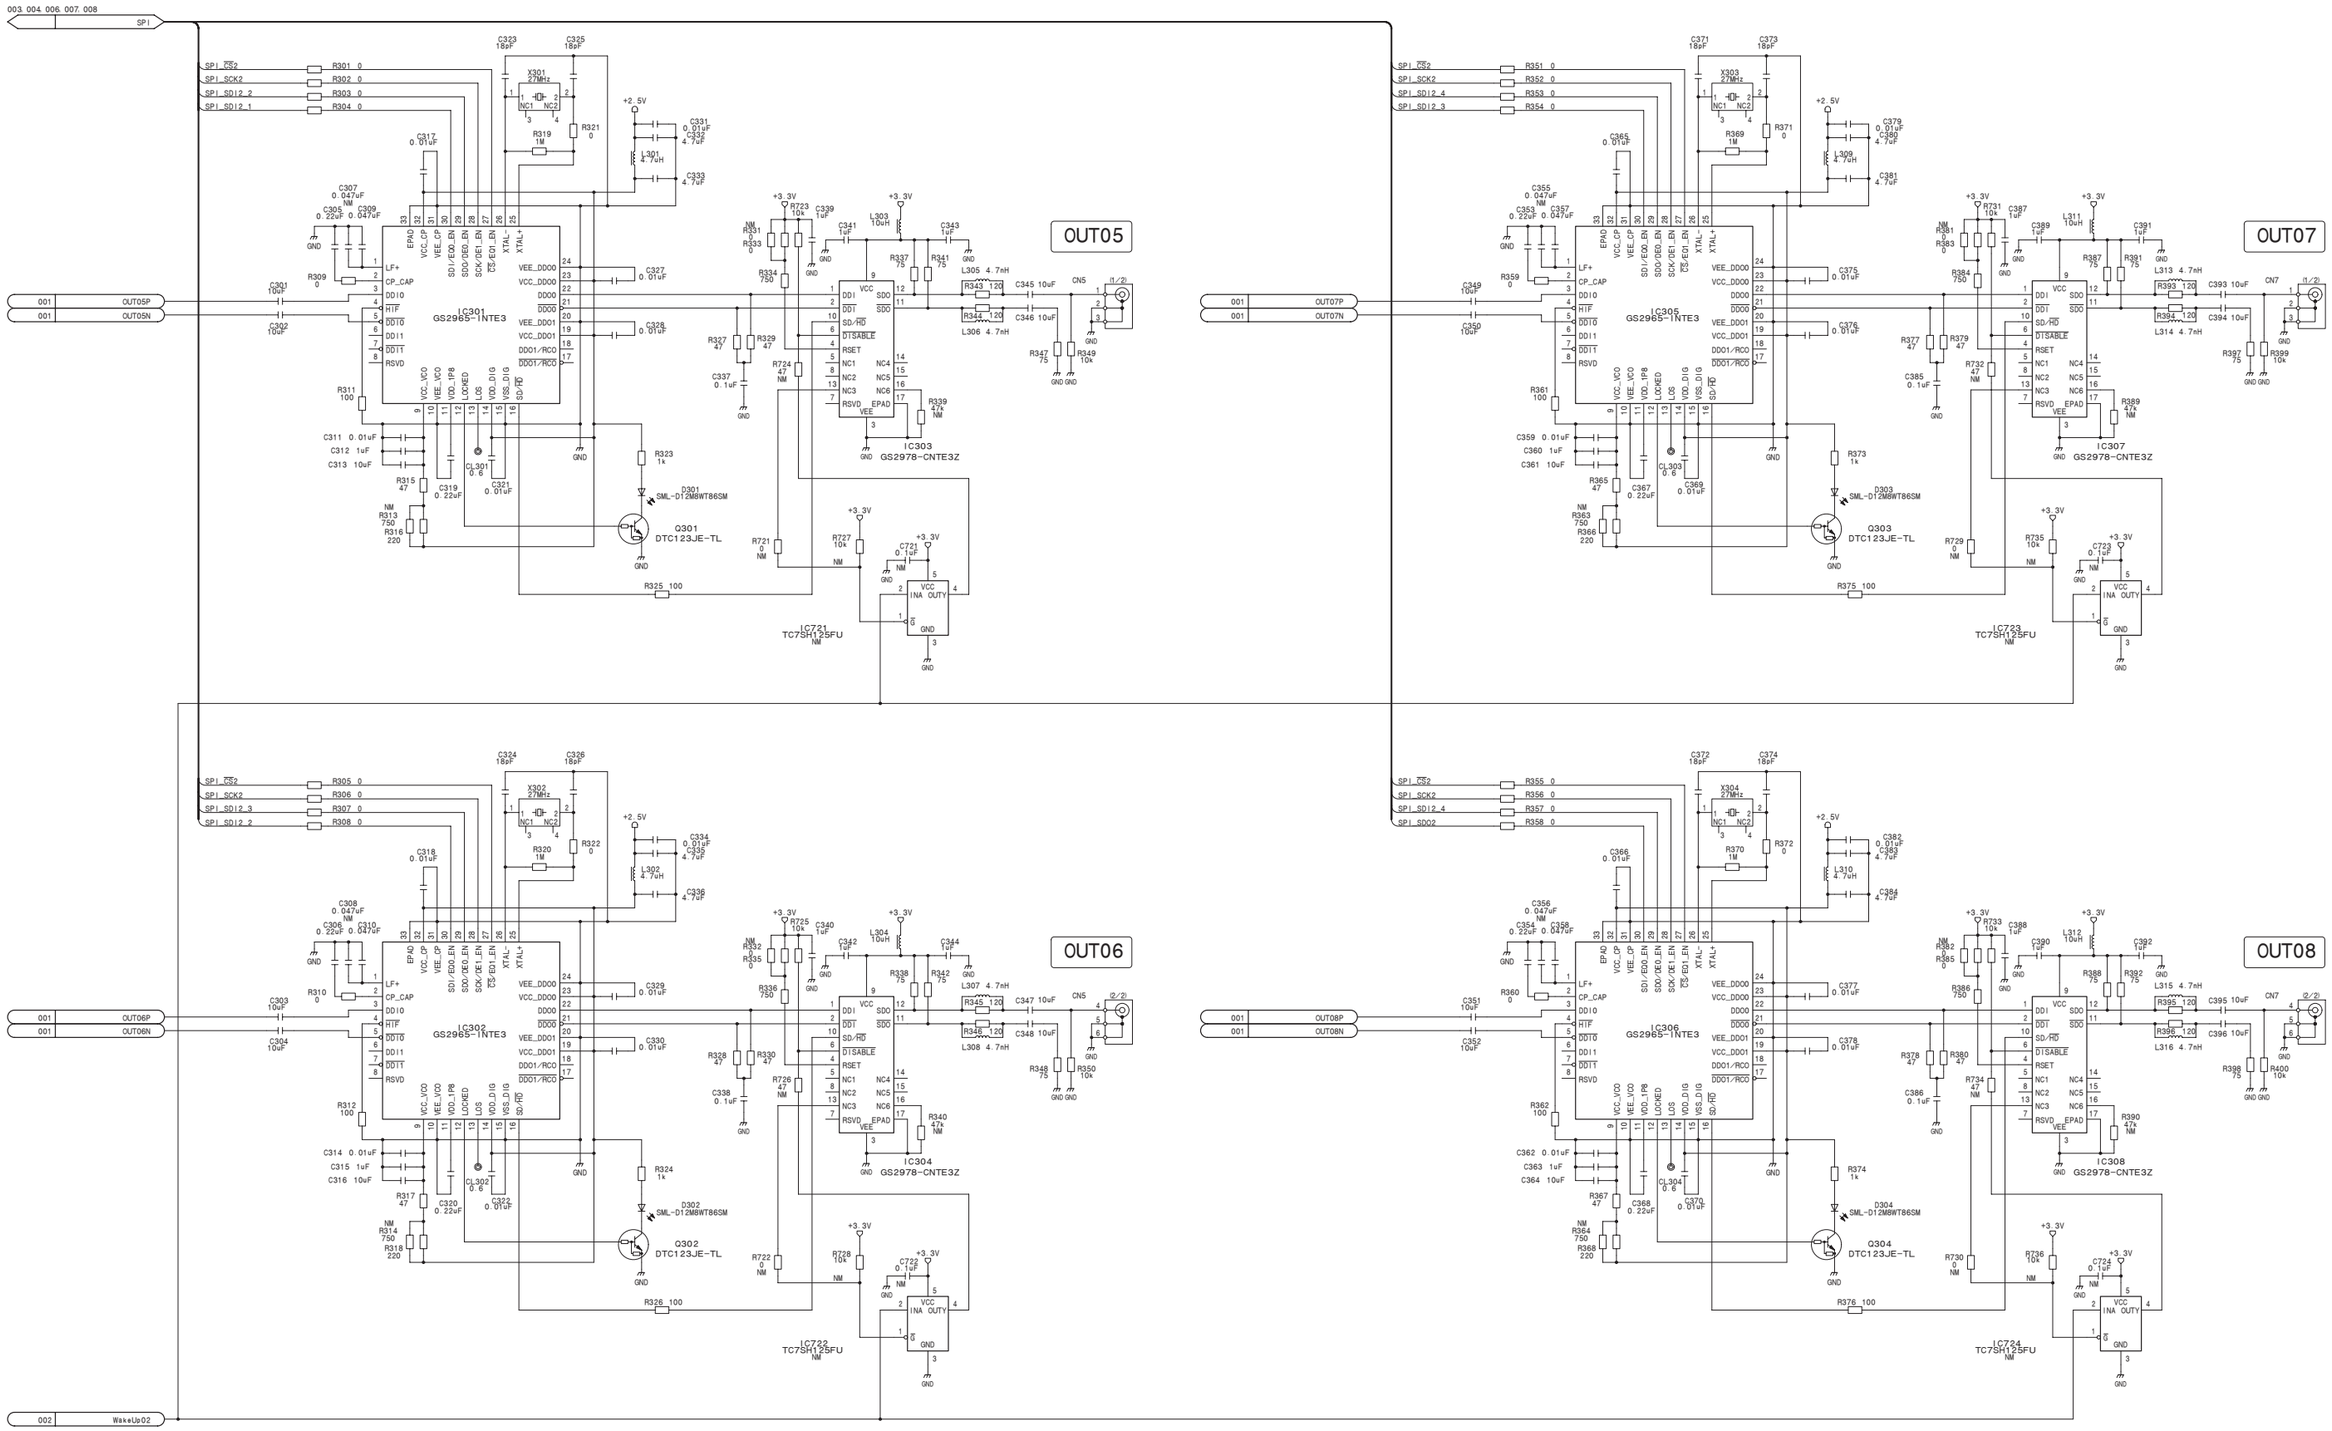

CNO-37 (5/8)

BOARD NO. 1-879-573-12

MVS-8000X_CNO-37_004_5

CNO-37 (6/8)
SUFFIX: -12

CNO-37 (6/8)
SUFFIX: -12

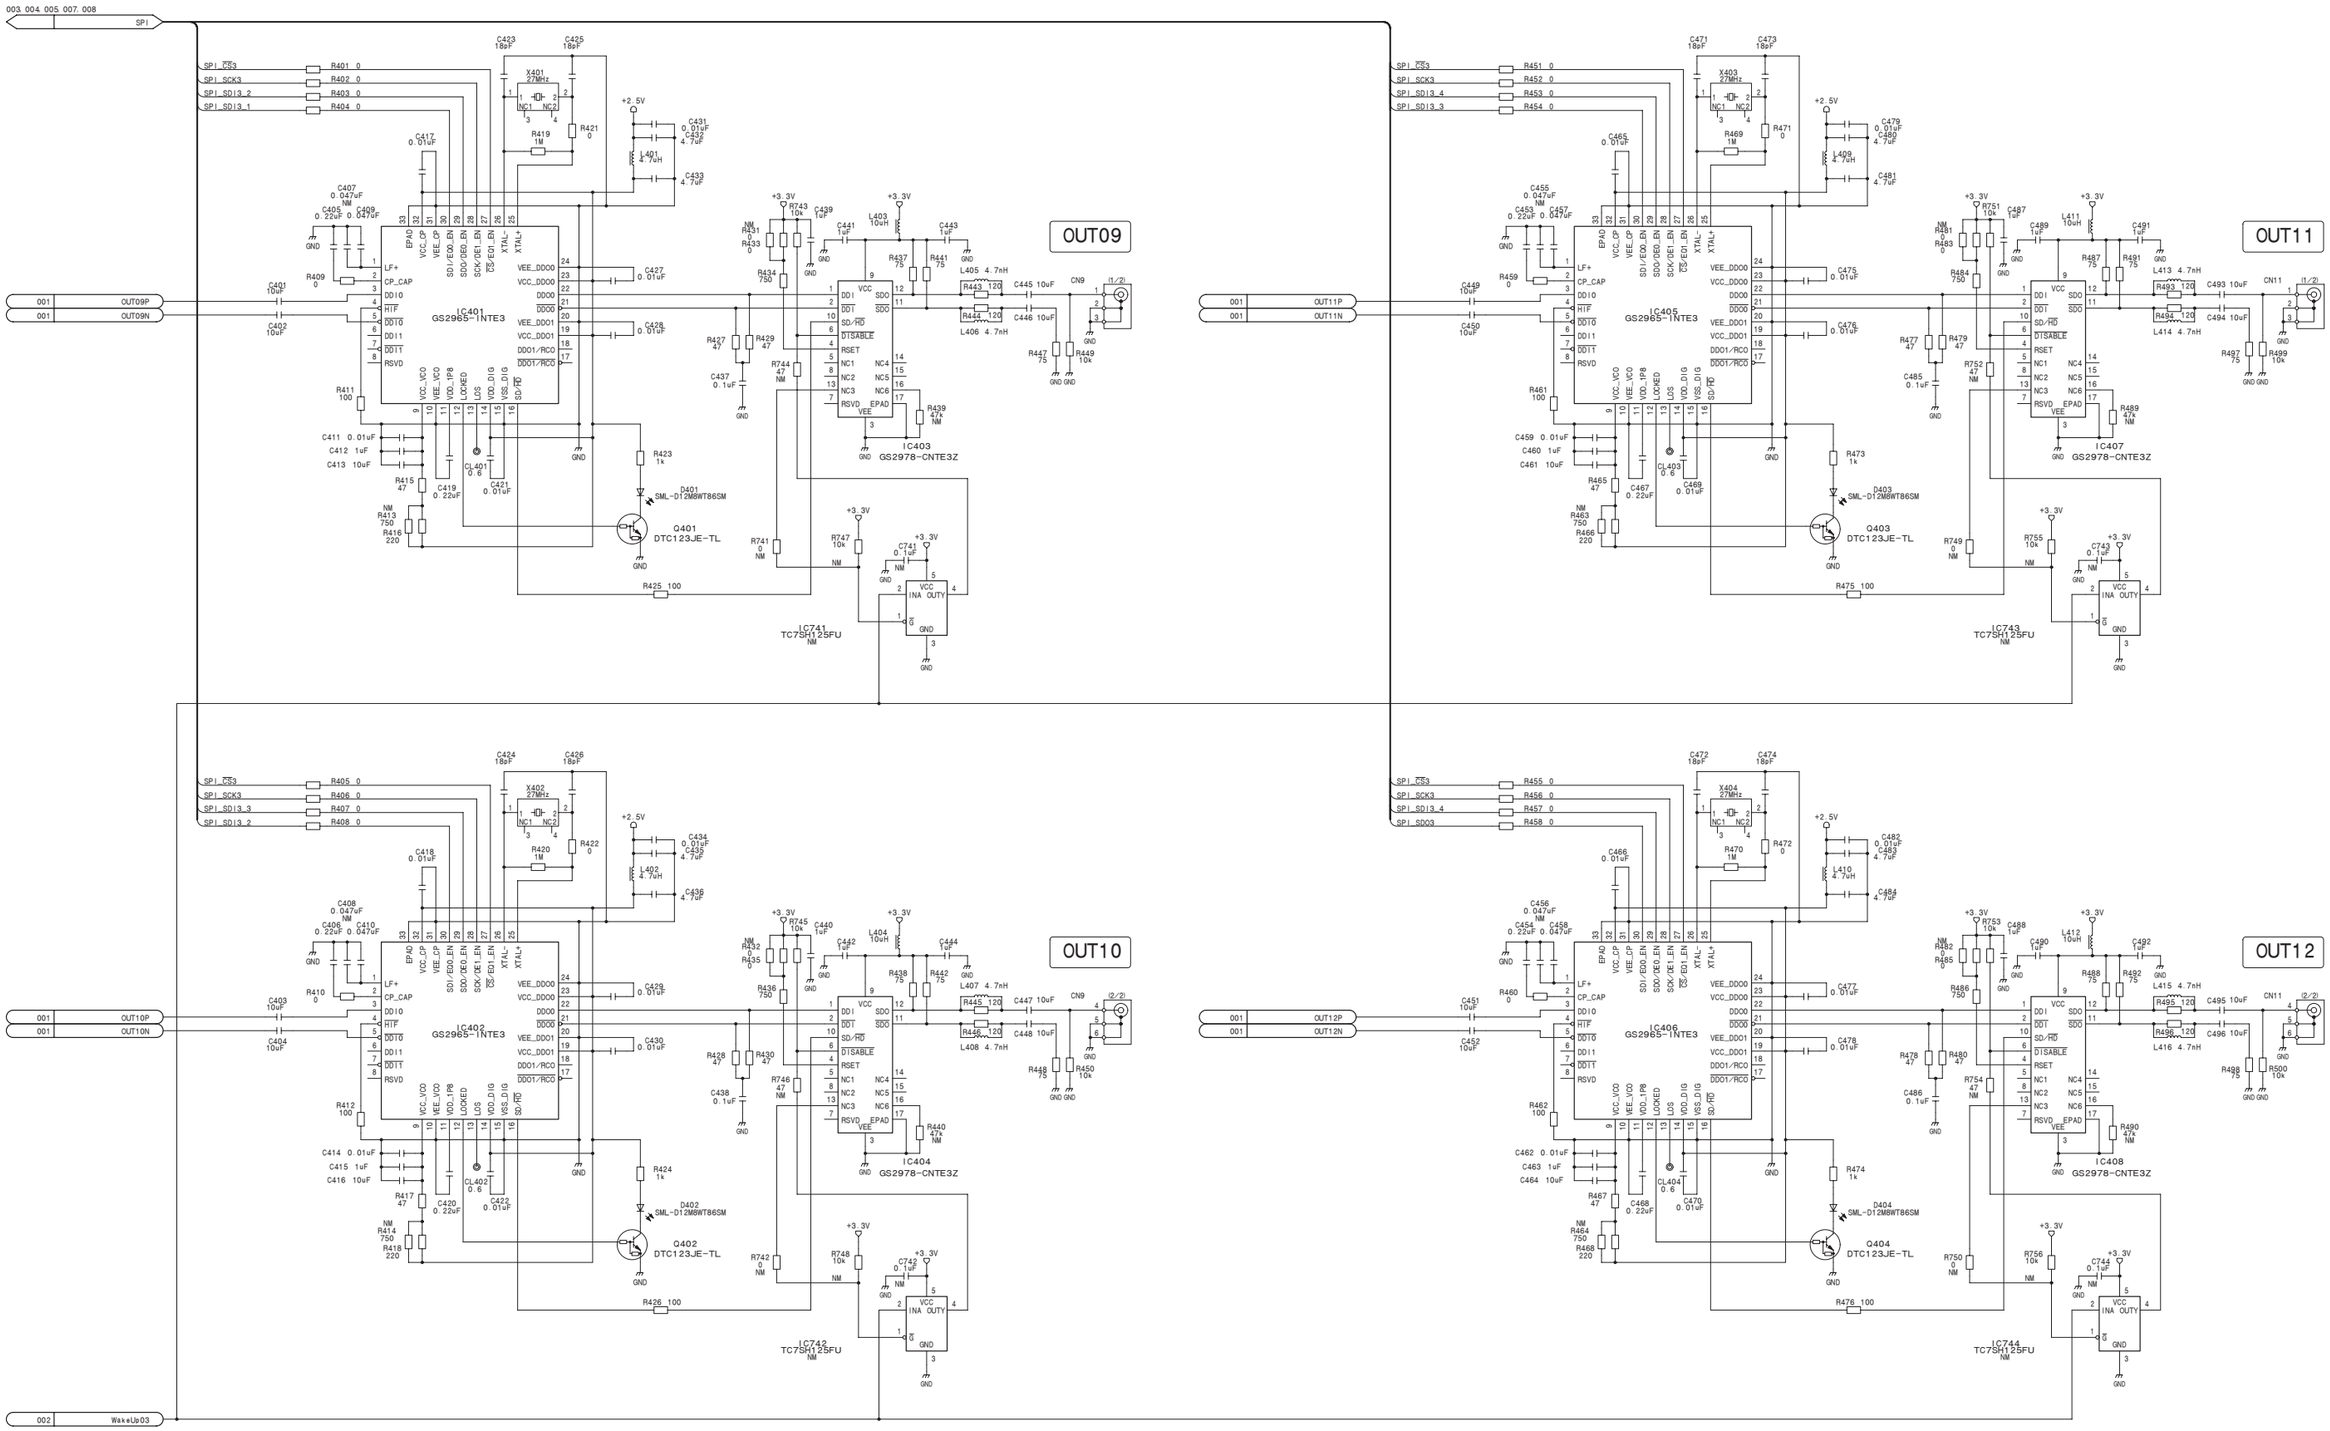

CNO-37 (6/8)
BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_6

CNO-37 (7/8)

SUFFIX: -12

CNO-37 (7/8)

SUFFIX: -12

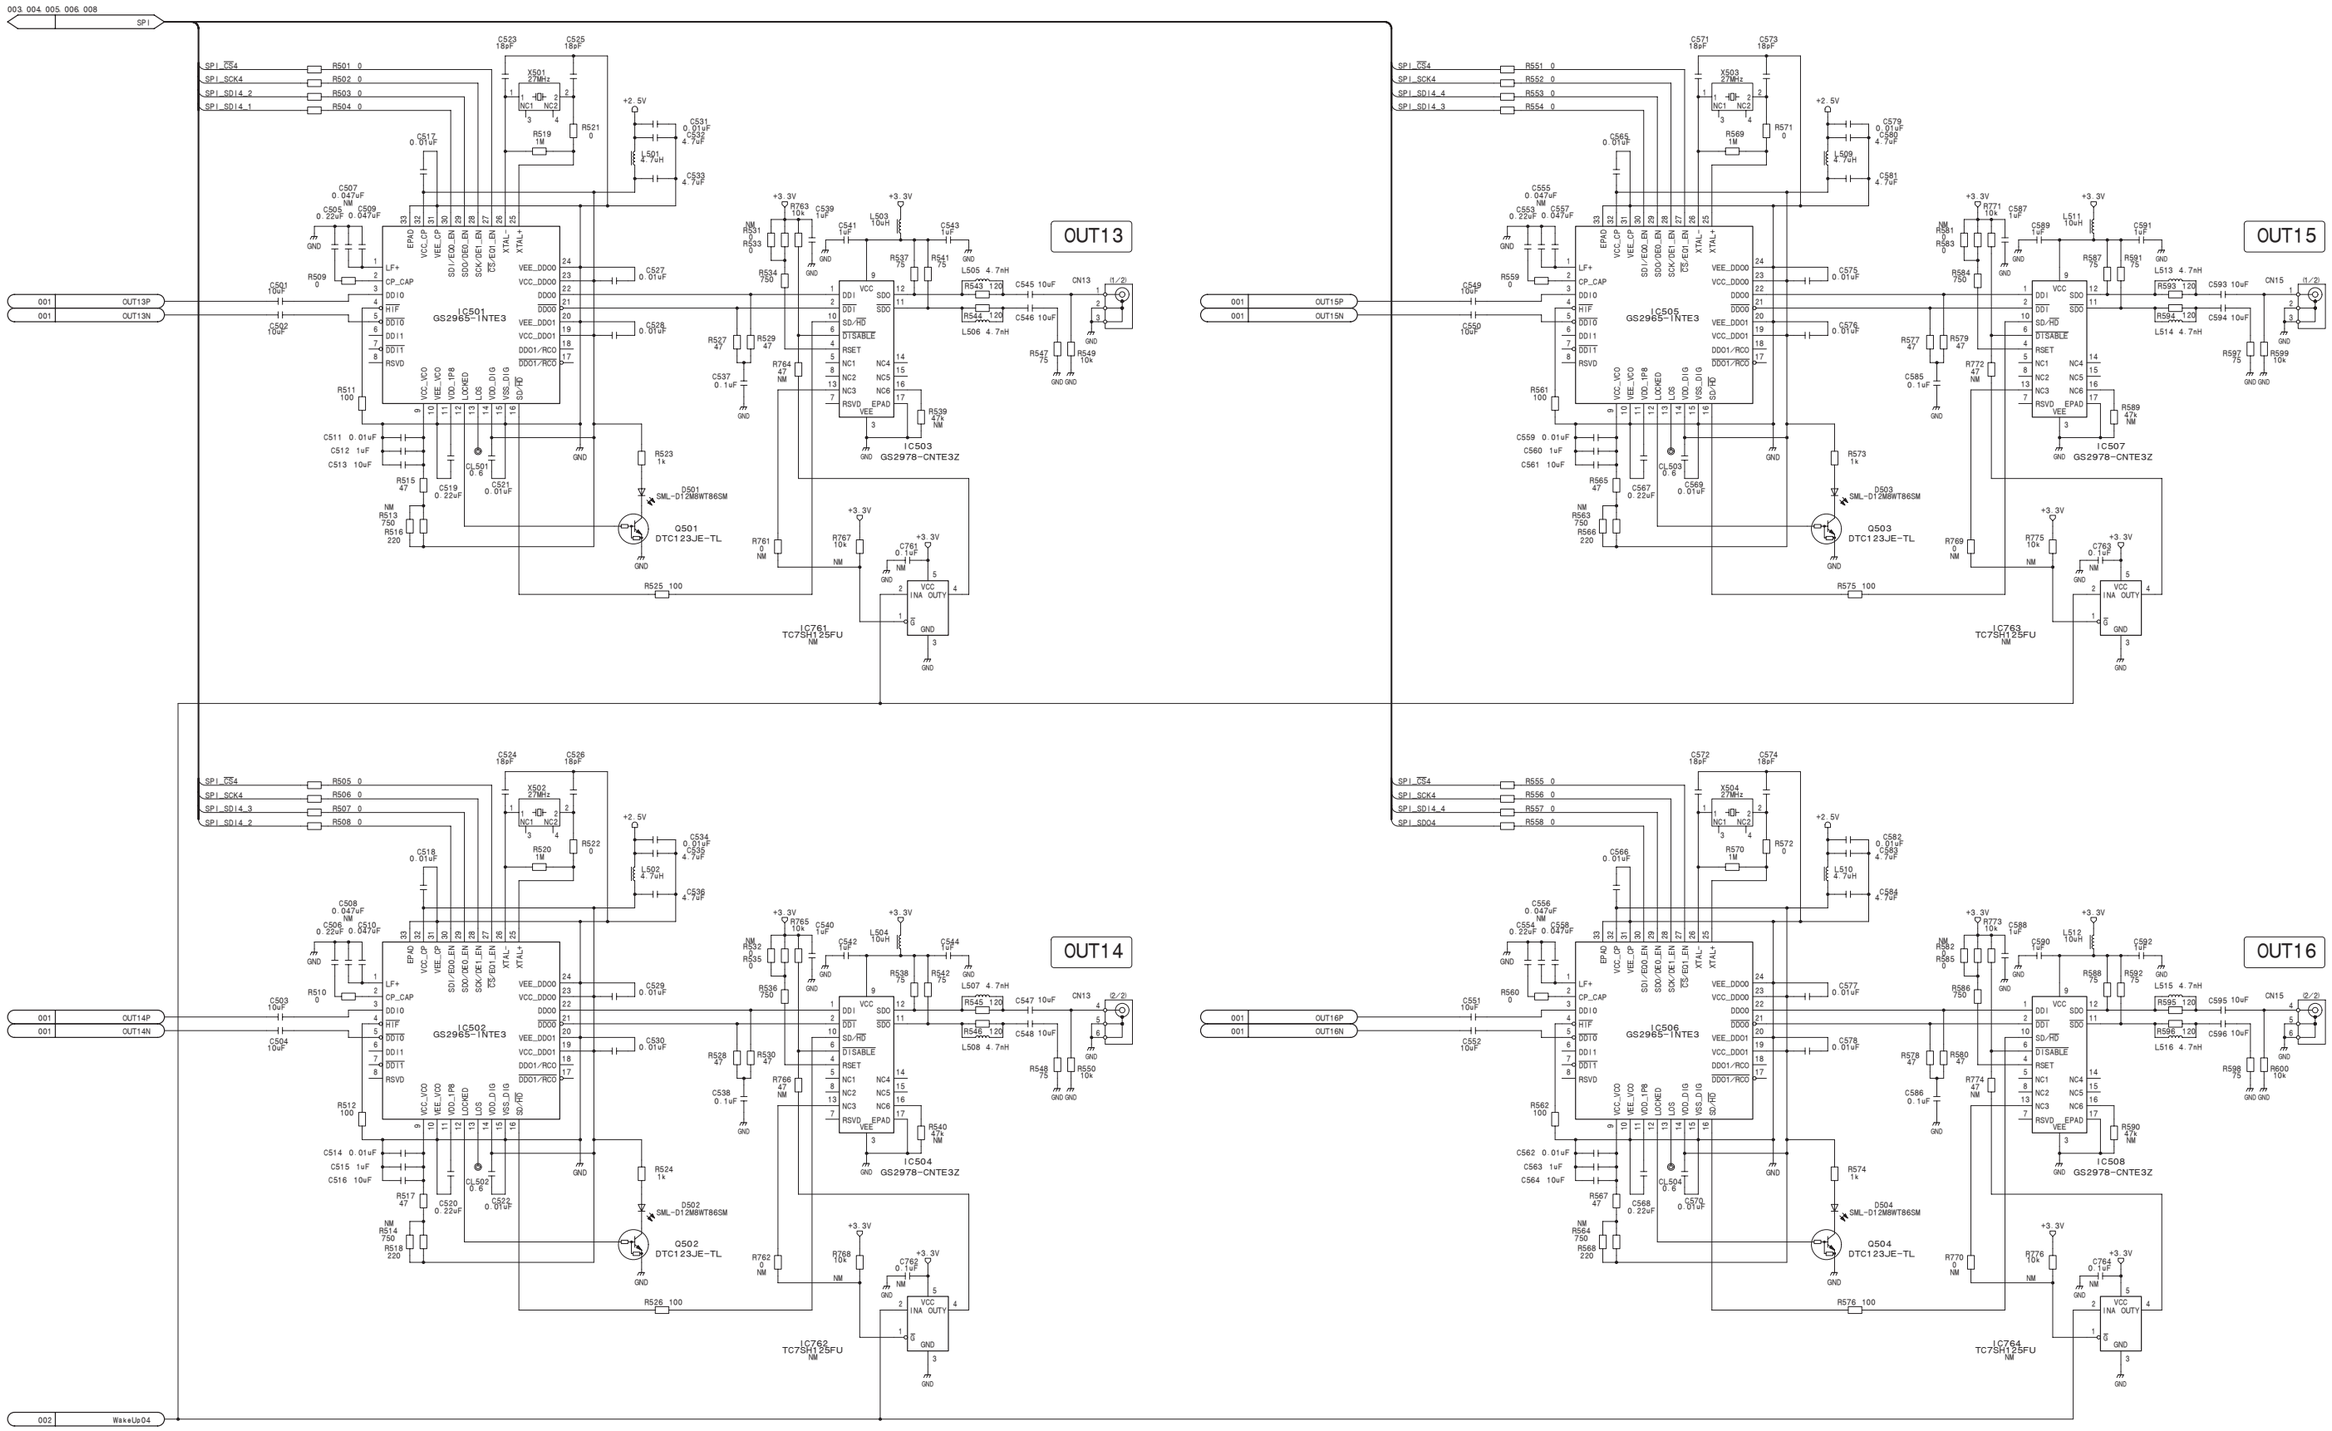

CNO-37 (7/8)

BOARD NO. 1-879-573-12

MVS-8000X_CNO-37_004_7

CNO-37 (8/8)
SUFFIX: -12

CNO-37 (8/8)
SUFFIX: -12

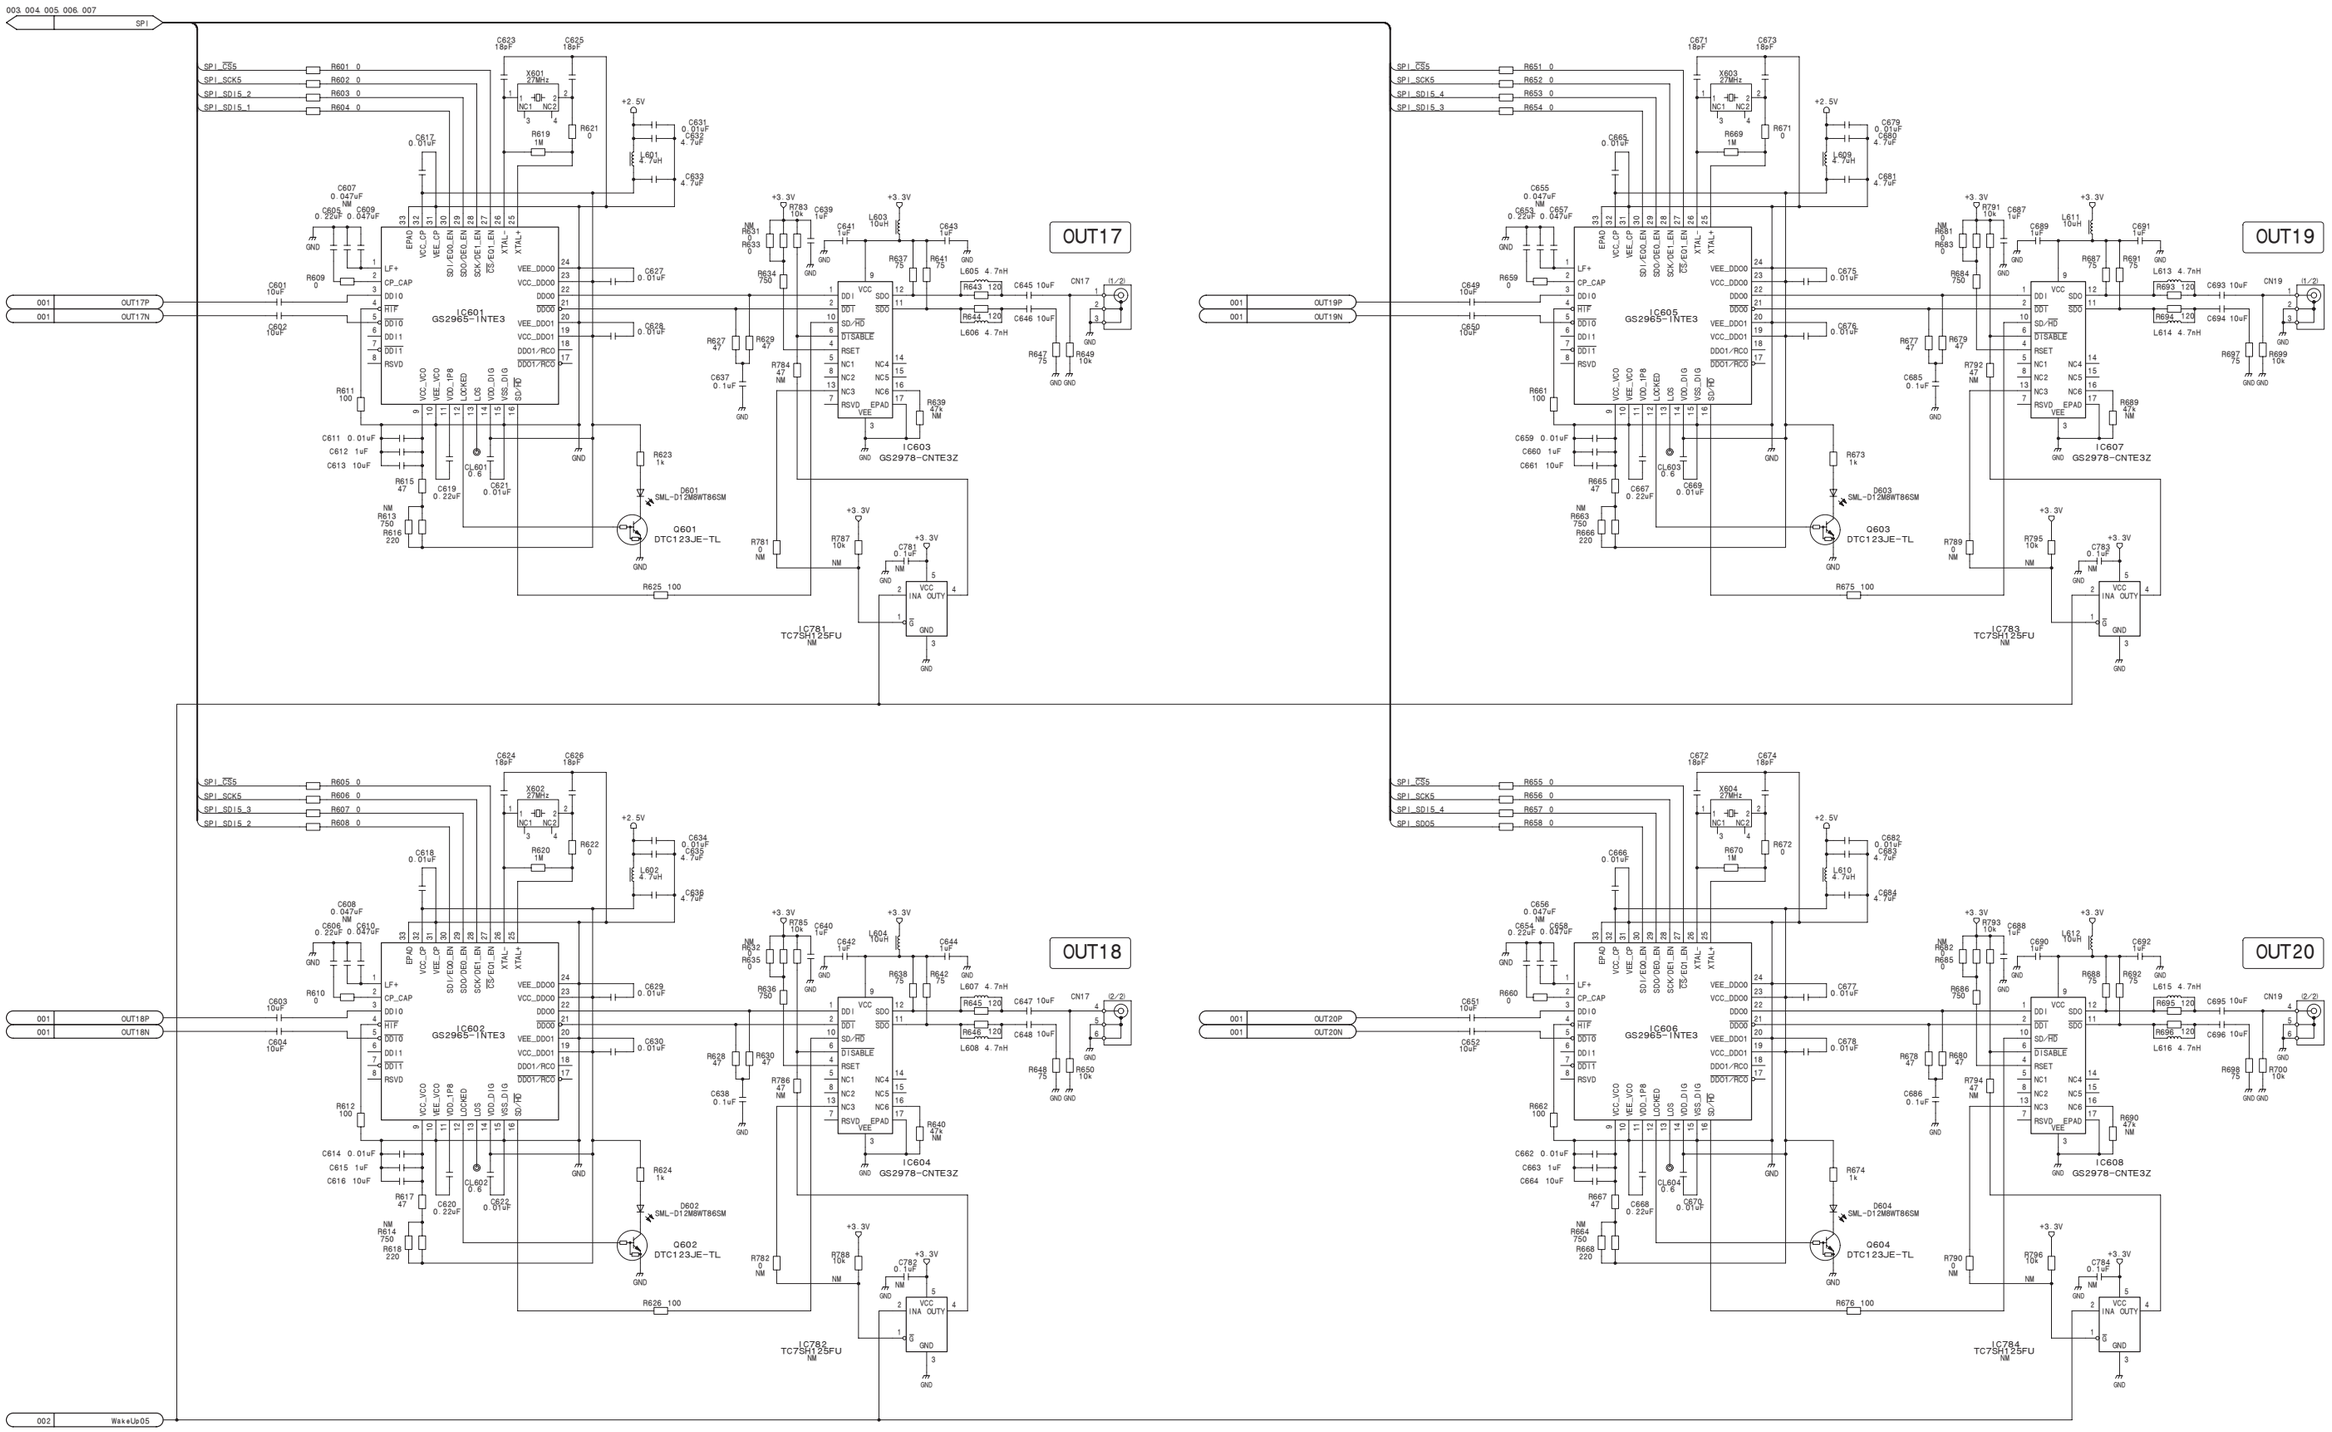

CNO-37 (8/8)
BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_8

4-126 (a)

CNO-38 (1/4)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	(SLOT_No4)	(SLOT_No5)	GND	(SLOT_No6)	(SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	SD/$\overline{HD}$_1	SD/$\overline{HD}$_2	GND
6	(RESET)	(DC_ENBL)	GND	SD/$\overline{HD}$_0	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-38 (1/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38_999_1

CNO-38 (2/4)
SUFFIX: -11

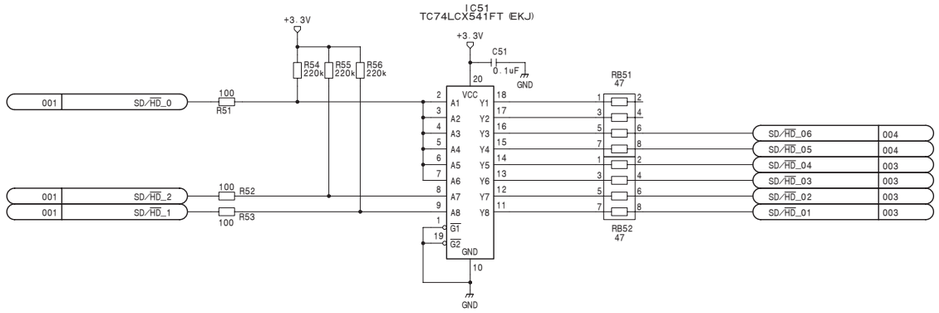

CNO-38 (2/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38_999_2

CNO-38 (3/4)

SUFFIX: -11

CNO-38 (3/4)
SUFFIX: -11

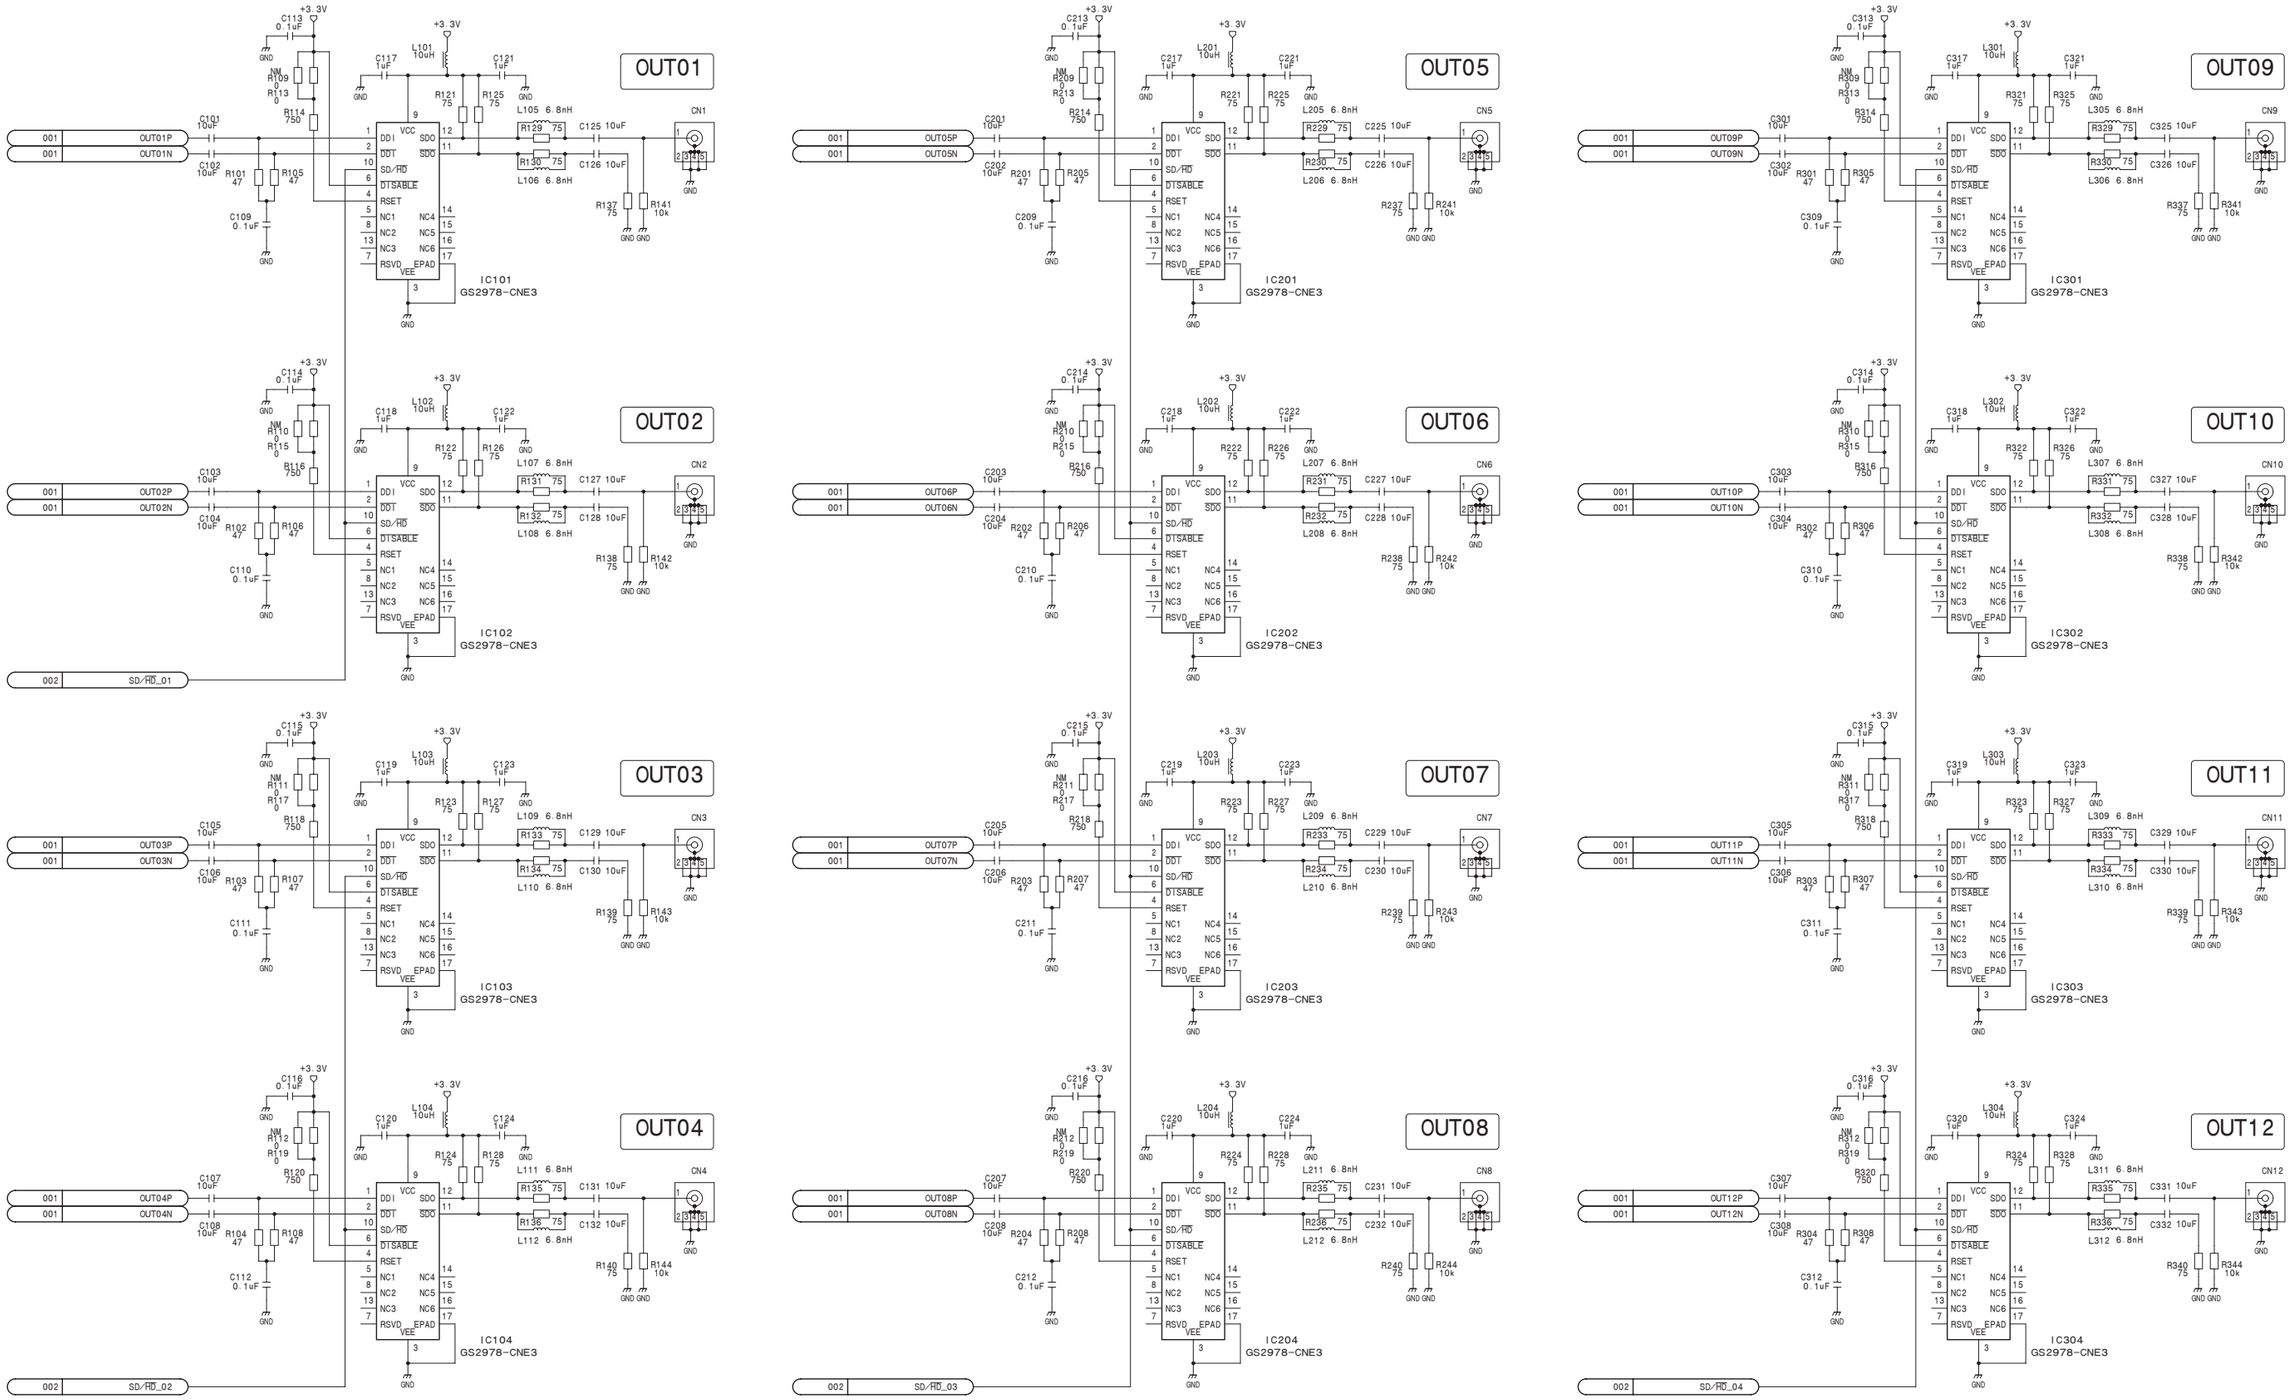

CNO-38 (3/4)

BOARD NO. 1-879-575-11

MVS-8000X_CNO-38_999_3

CNO-38 (4/4)
SUFFIX: -11

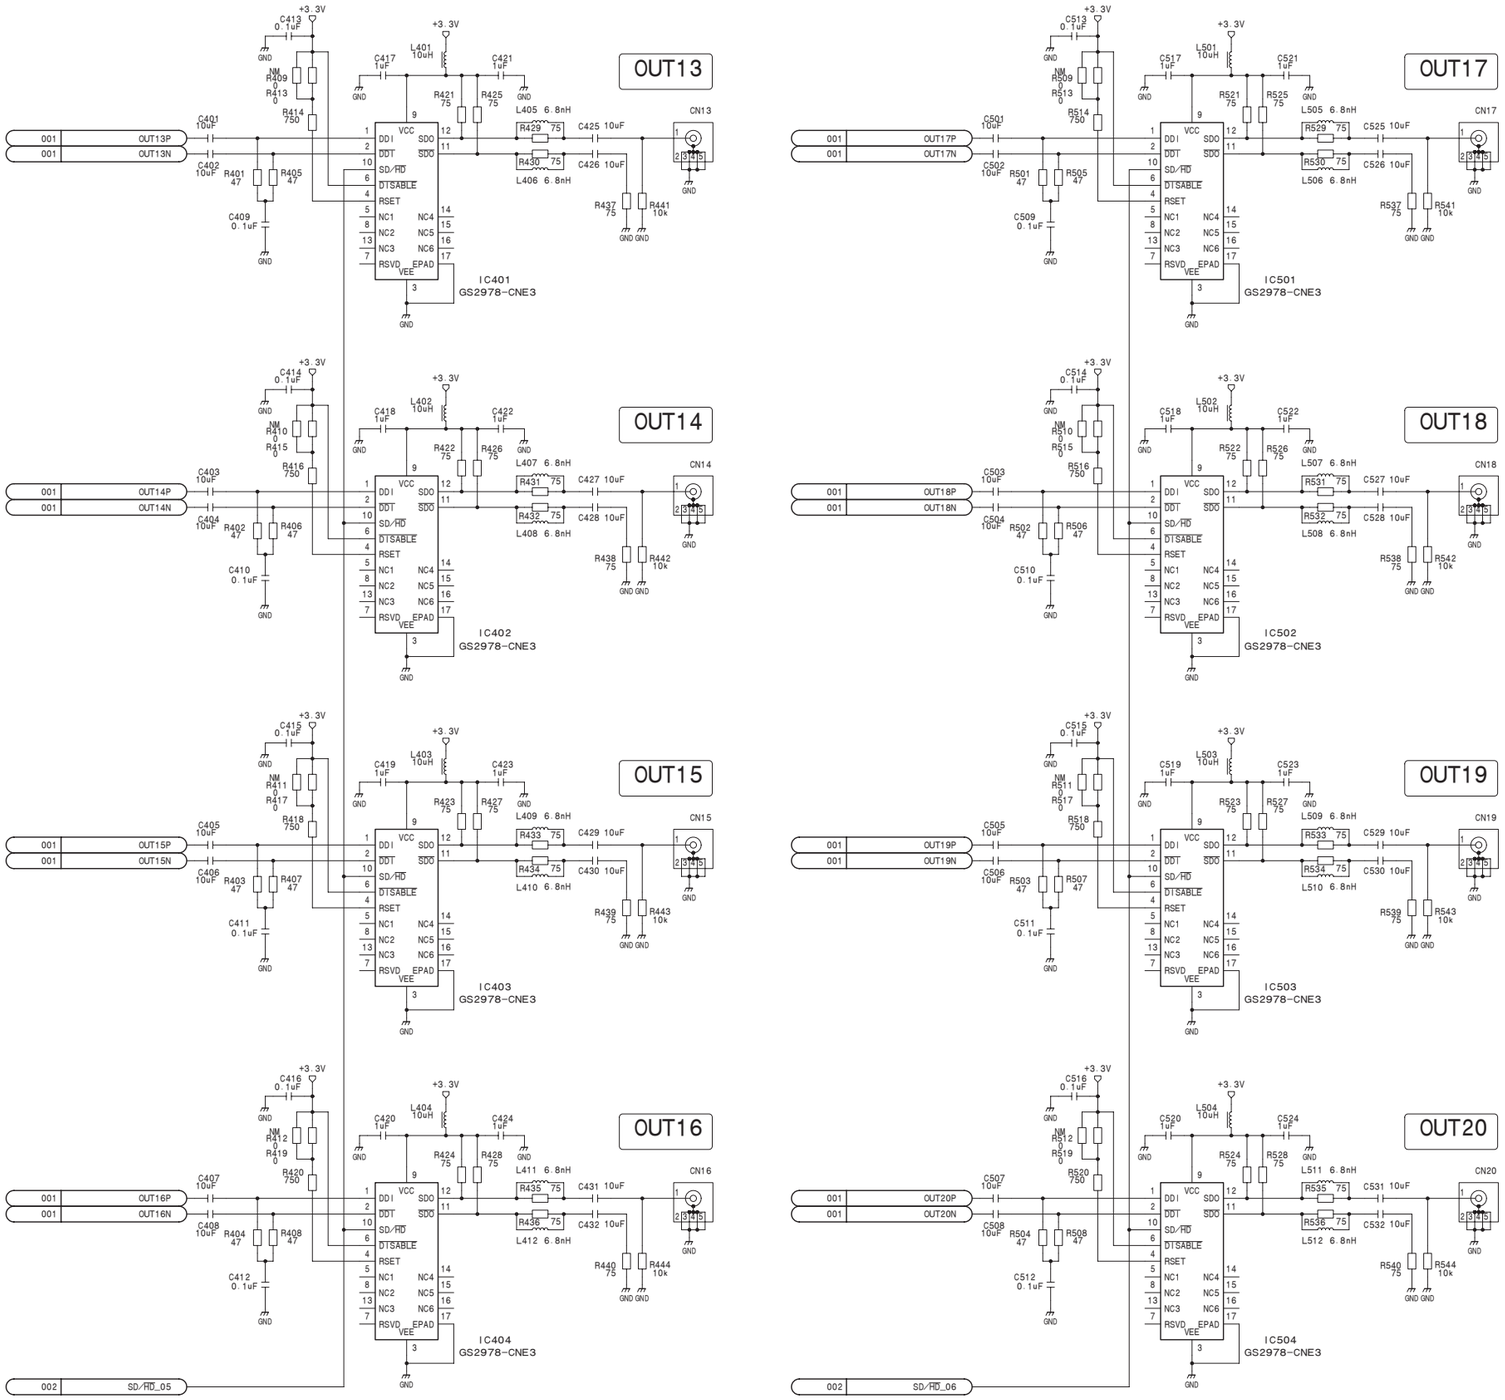

CNO-38 (4/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38_999_4

CNO-38 (1/7)
SUFFIX: -12

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	(SLOT_No4)	(SLOT_No5)	GND	(SLOT_No6)	(SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	SD/$\overline{HD}$_1	SD/$\overline{HD}$_2	GND
6	(RESET)	(DC_ENBL)	GND	SD/$\overline{HD}$_0	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-38 (1/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38_004_1

4-127 (a)

1 2 3 4 5

CNO-38 (2/7)
SUFFIX: -12

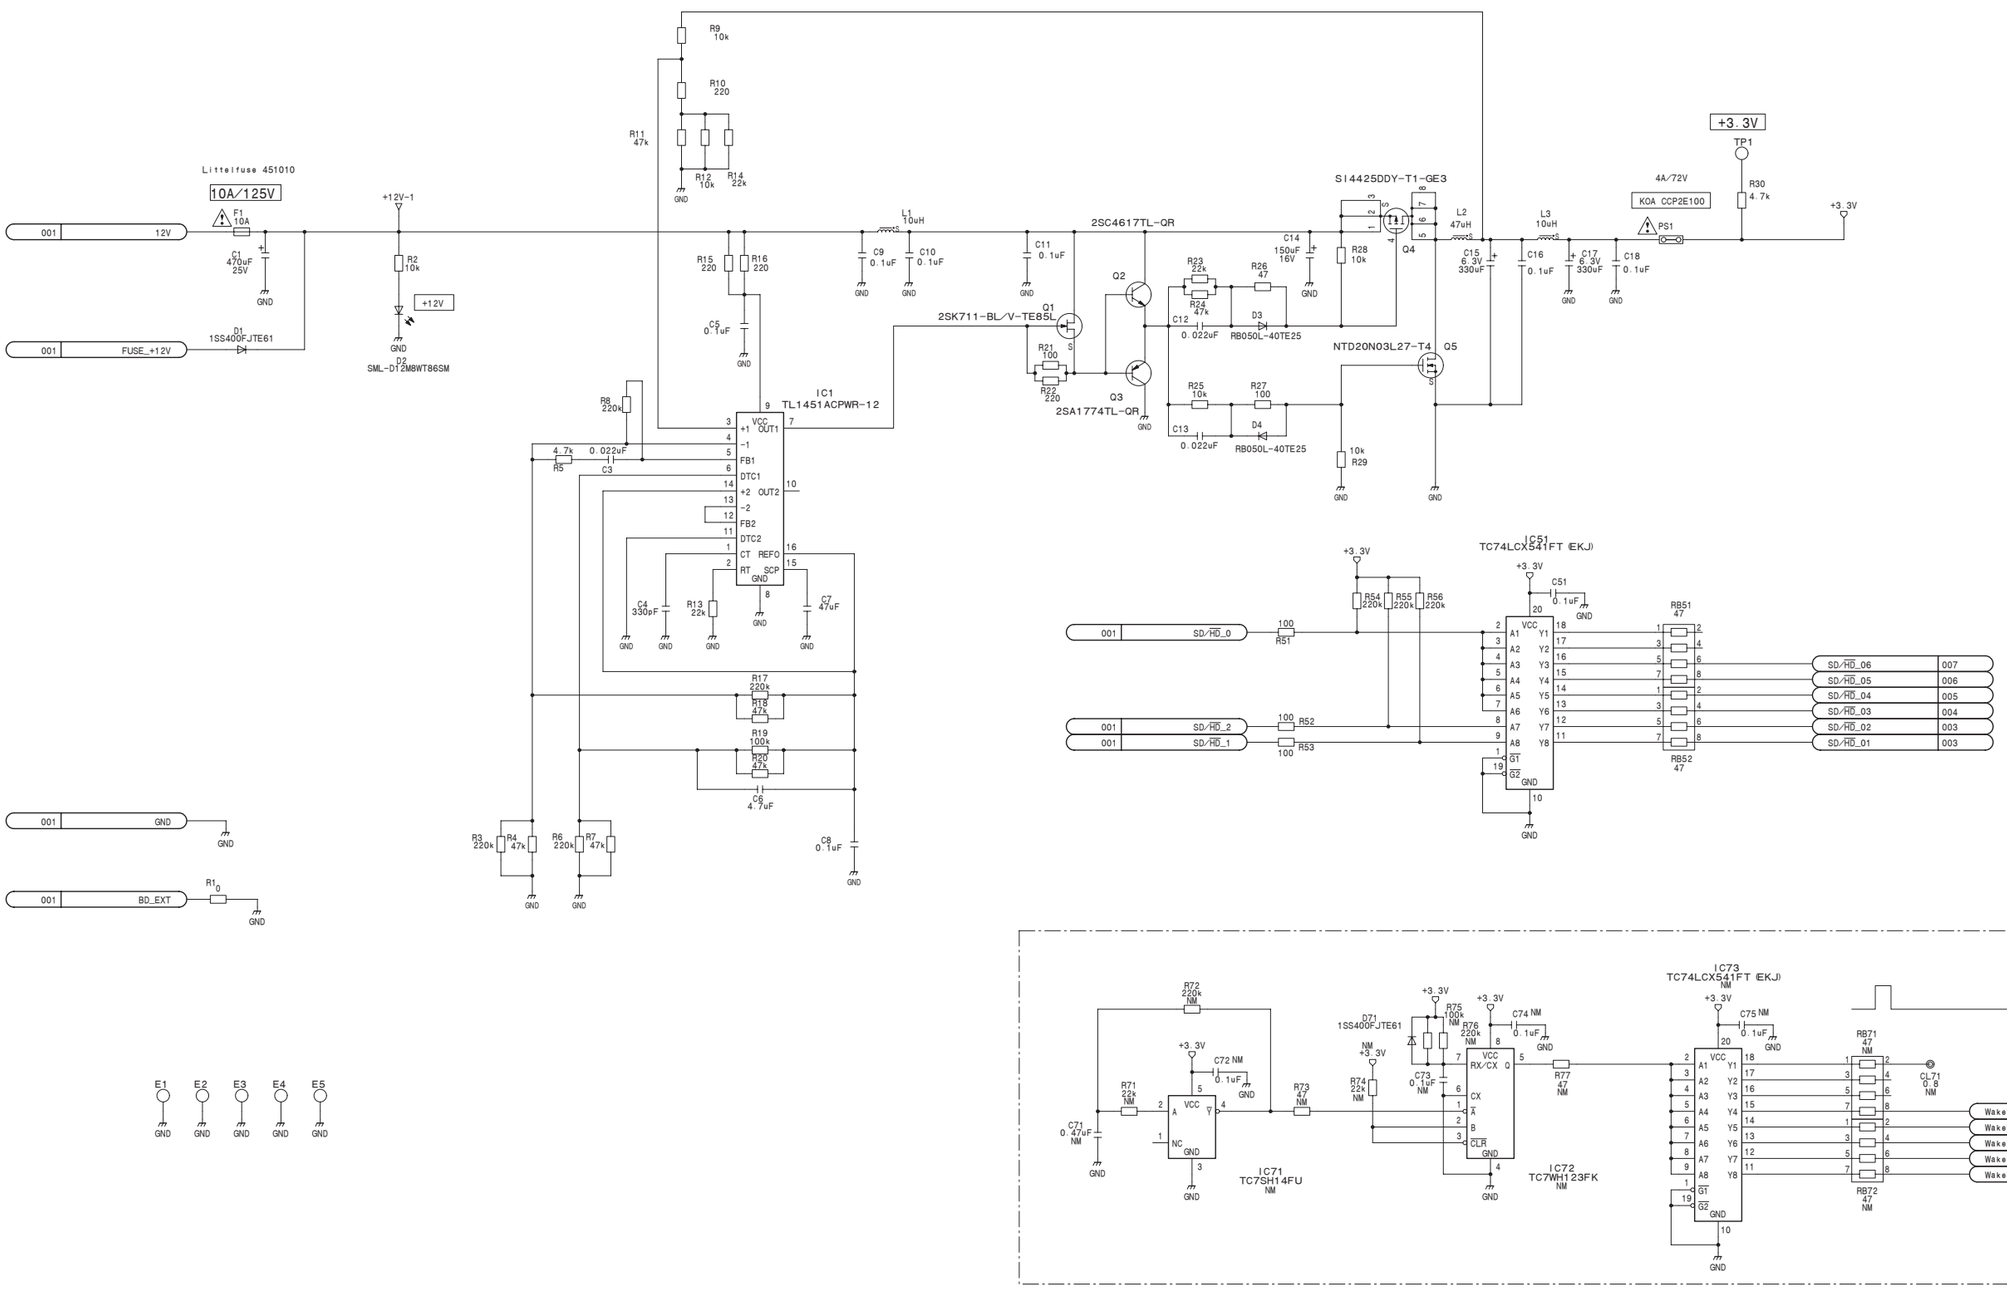

CNO-38 (2/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38_004_2

CNO-38 (3/7)
SUFFIX: -12

CNO-38 (3/7)
SUFFIX: -12

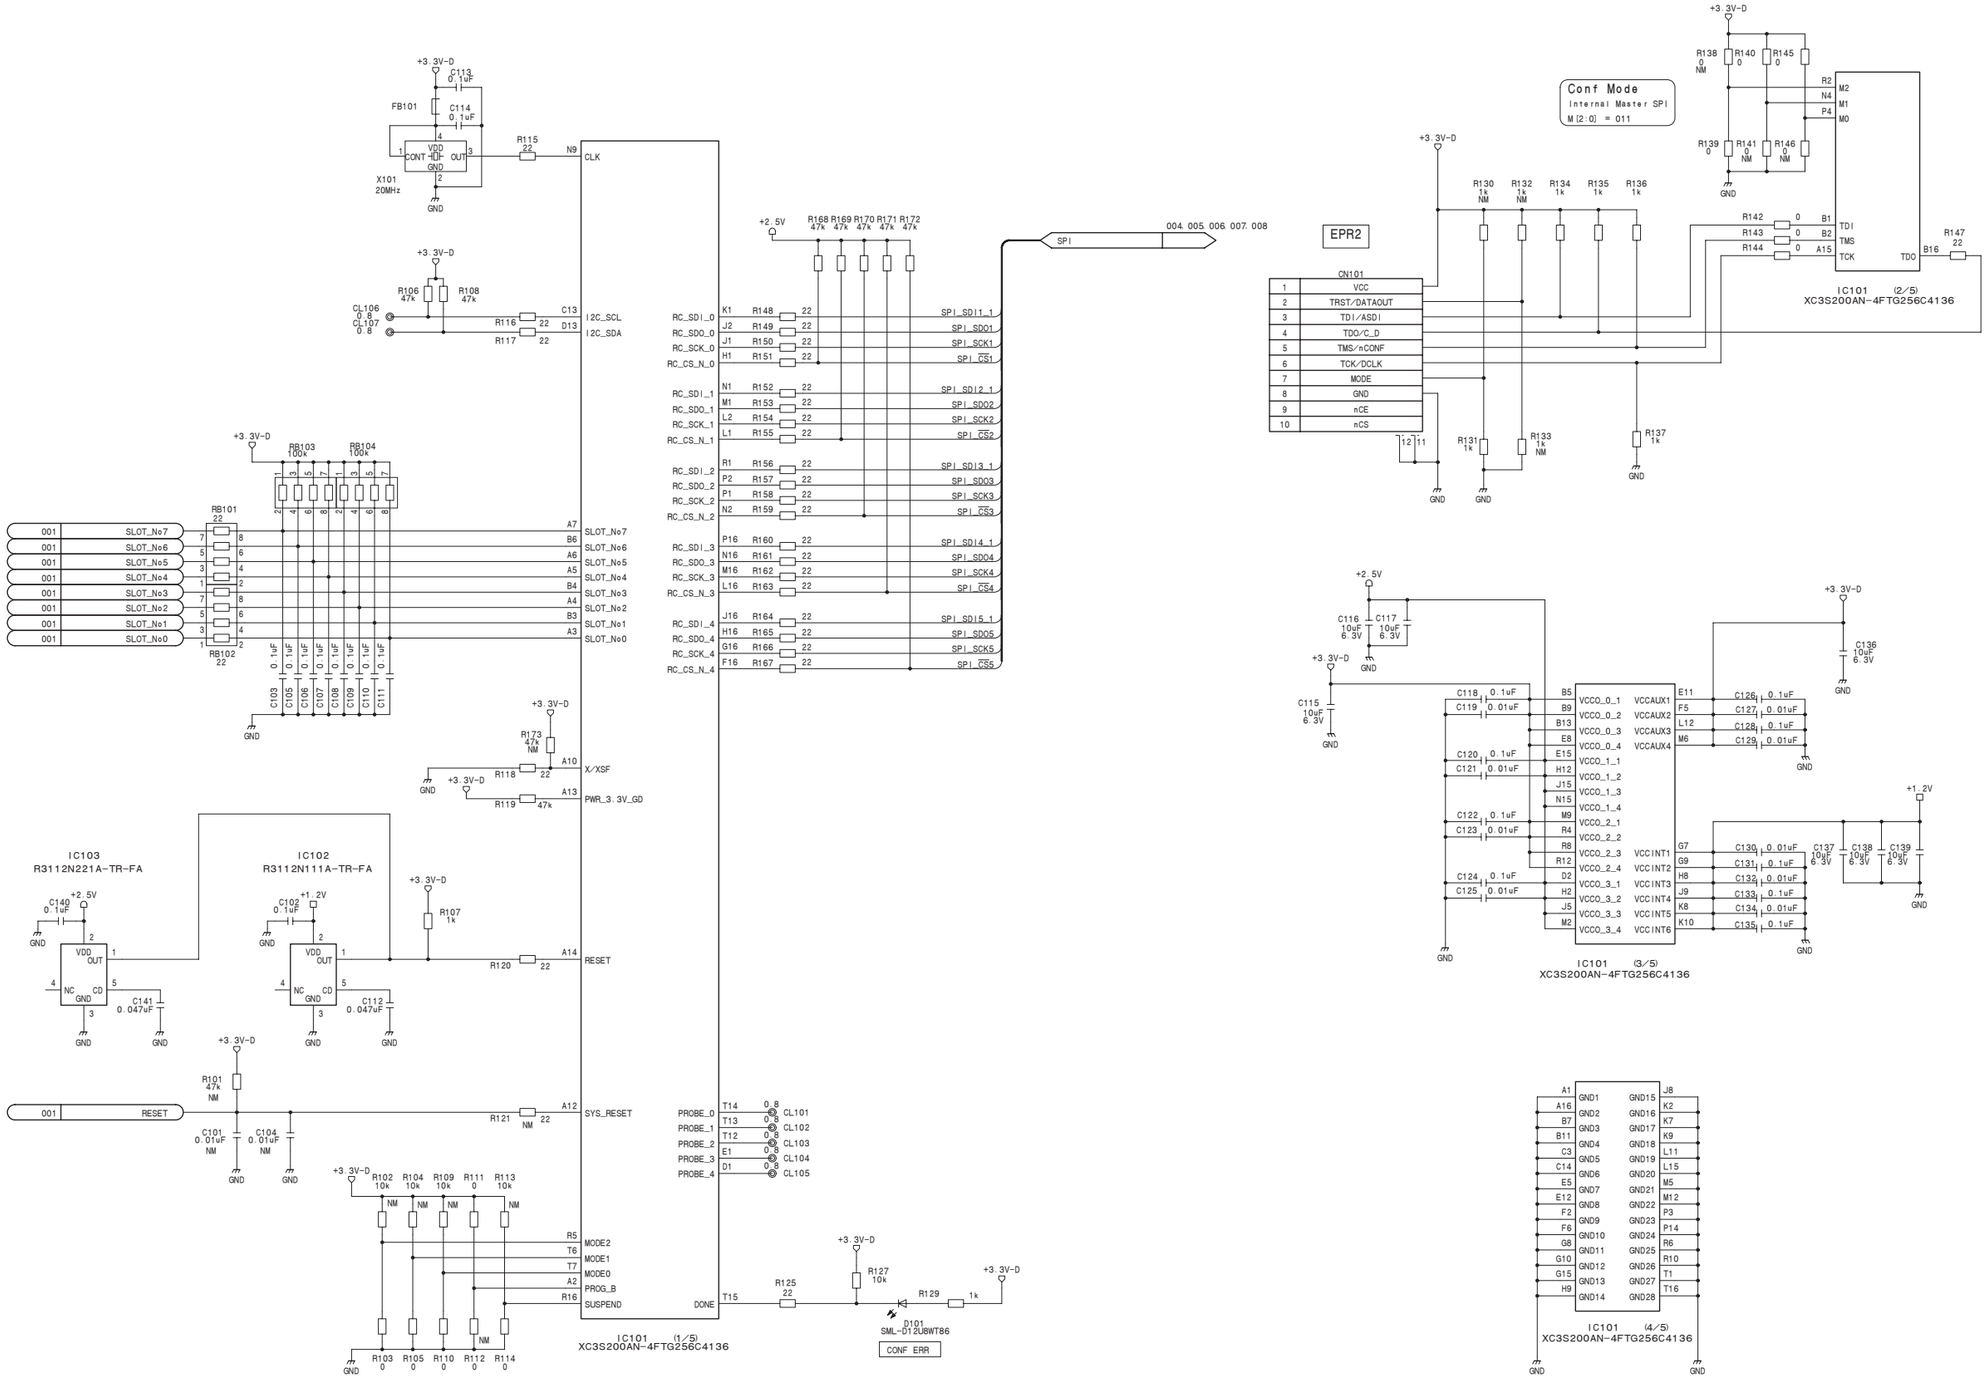

CNO-37 (3/8)
BOARD NO. 1-879-573-12
MVS-8000X_CNO-37_004_3

CNO-38 (4/7) **SUFFIX: -12**

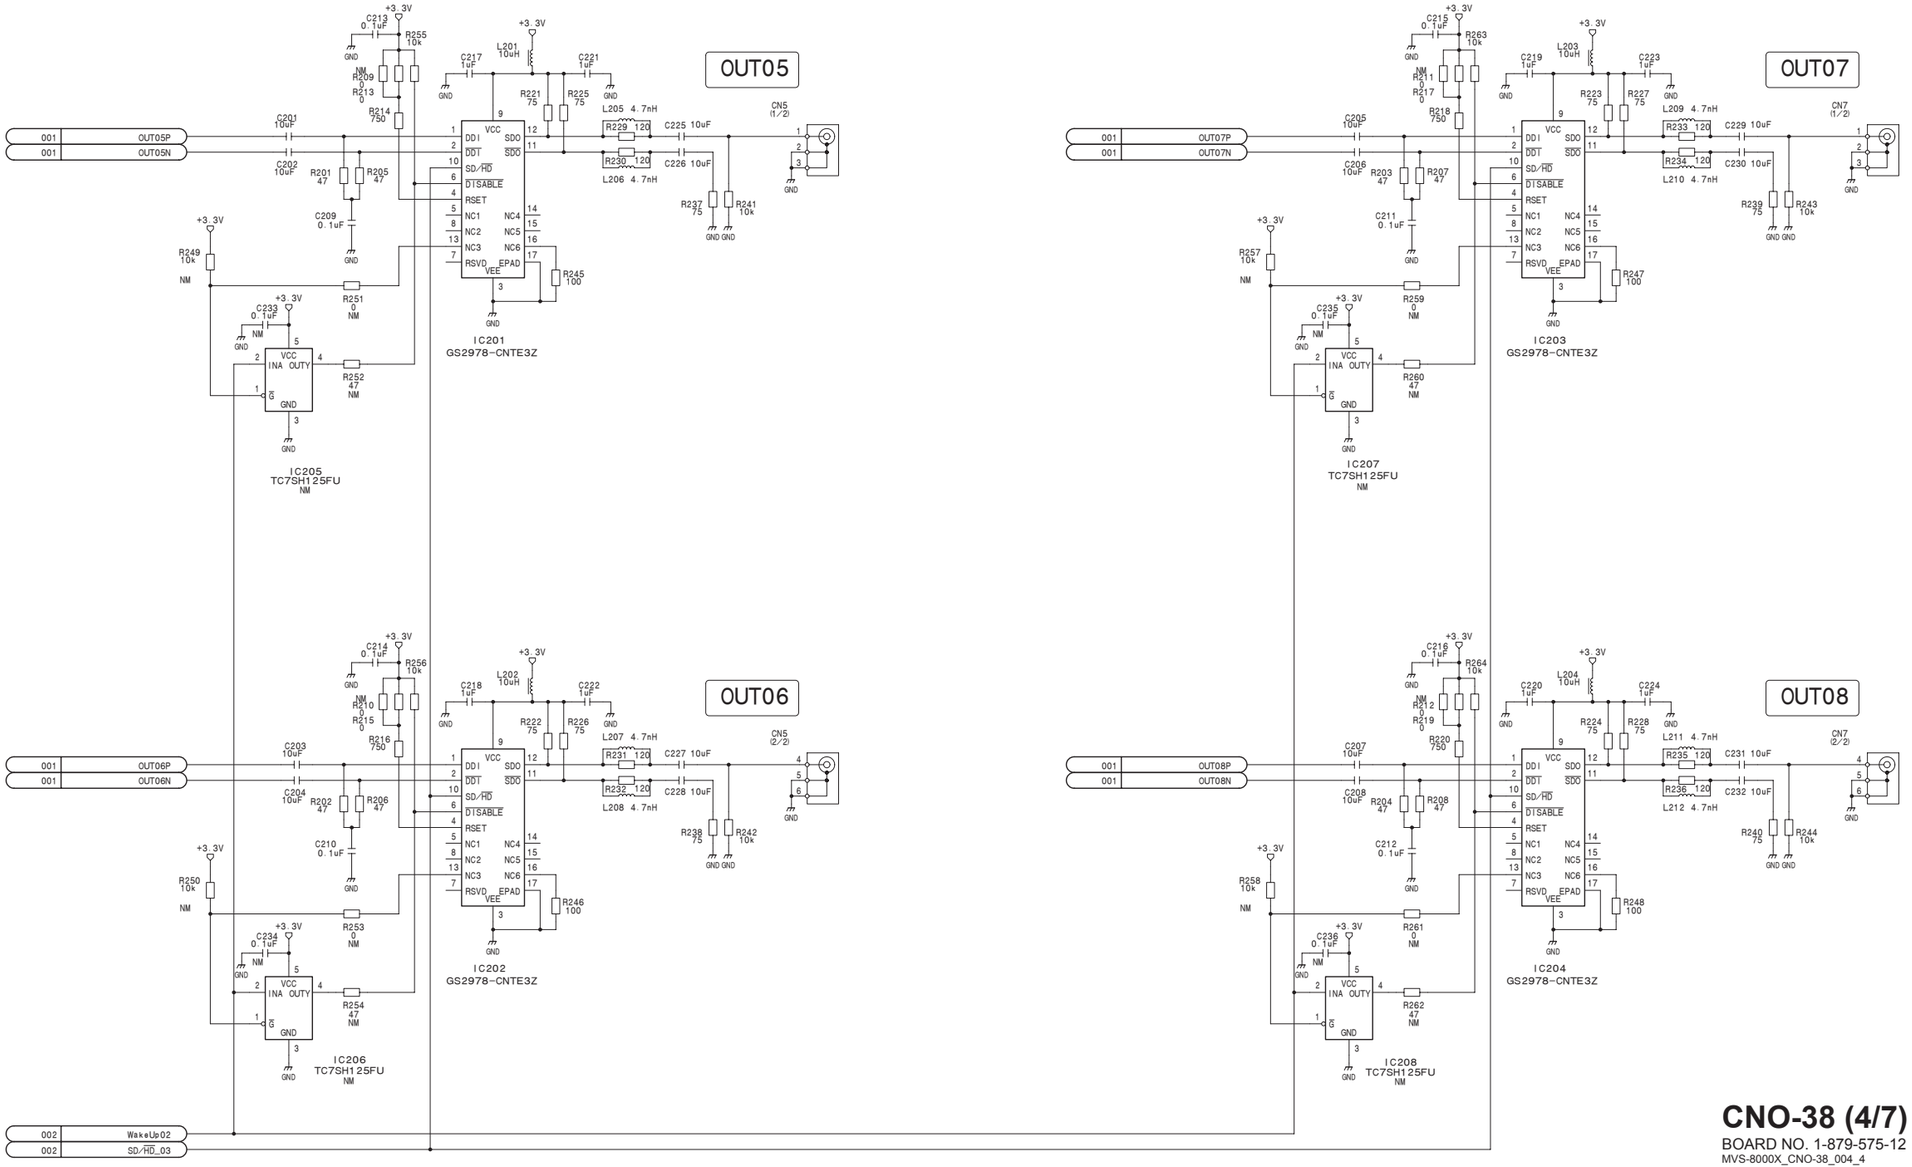

CNO-38 (4/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38_004_4

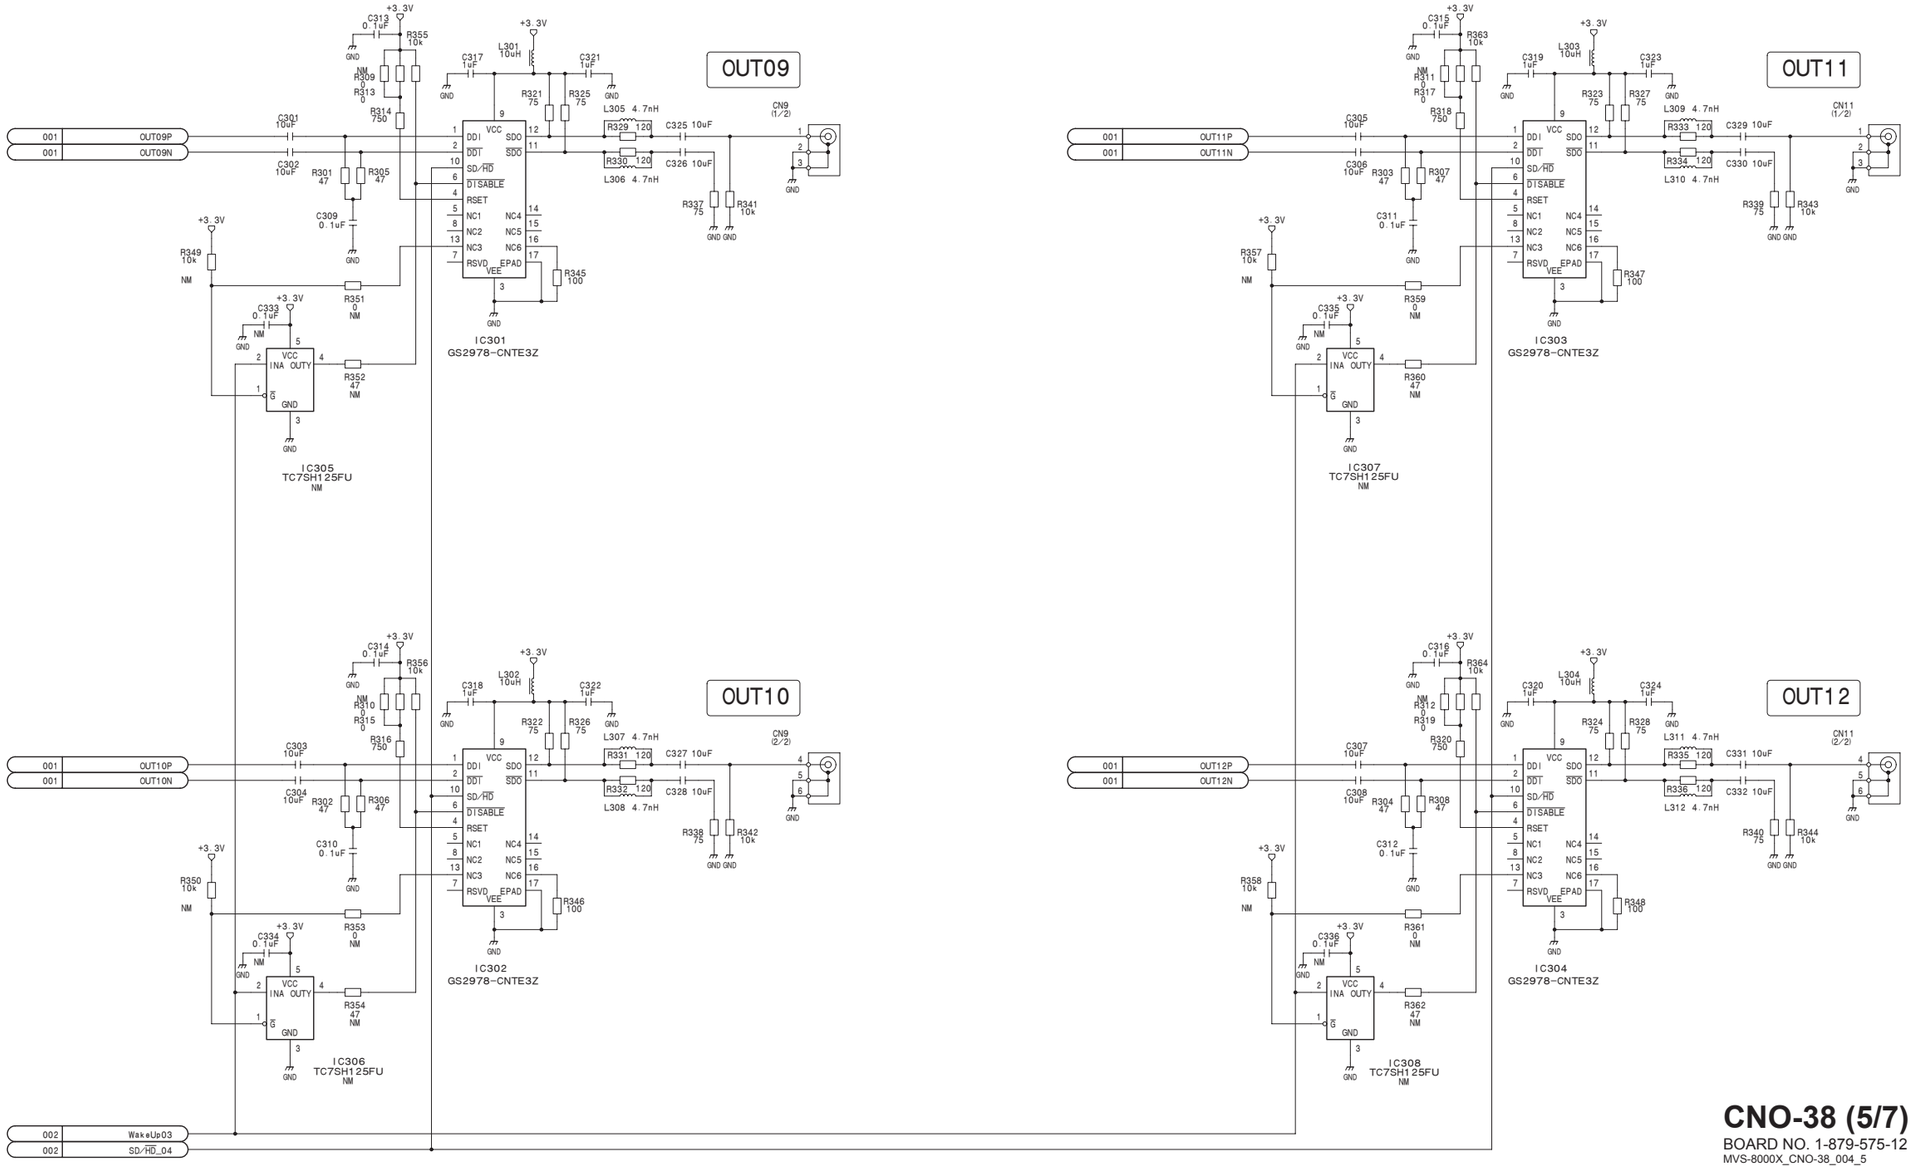

CNO-38 (5/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38_004_5

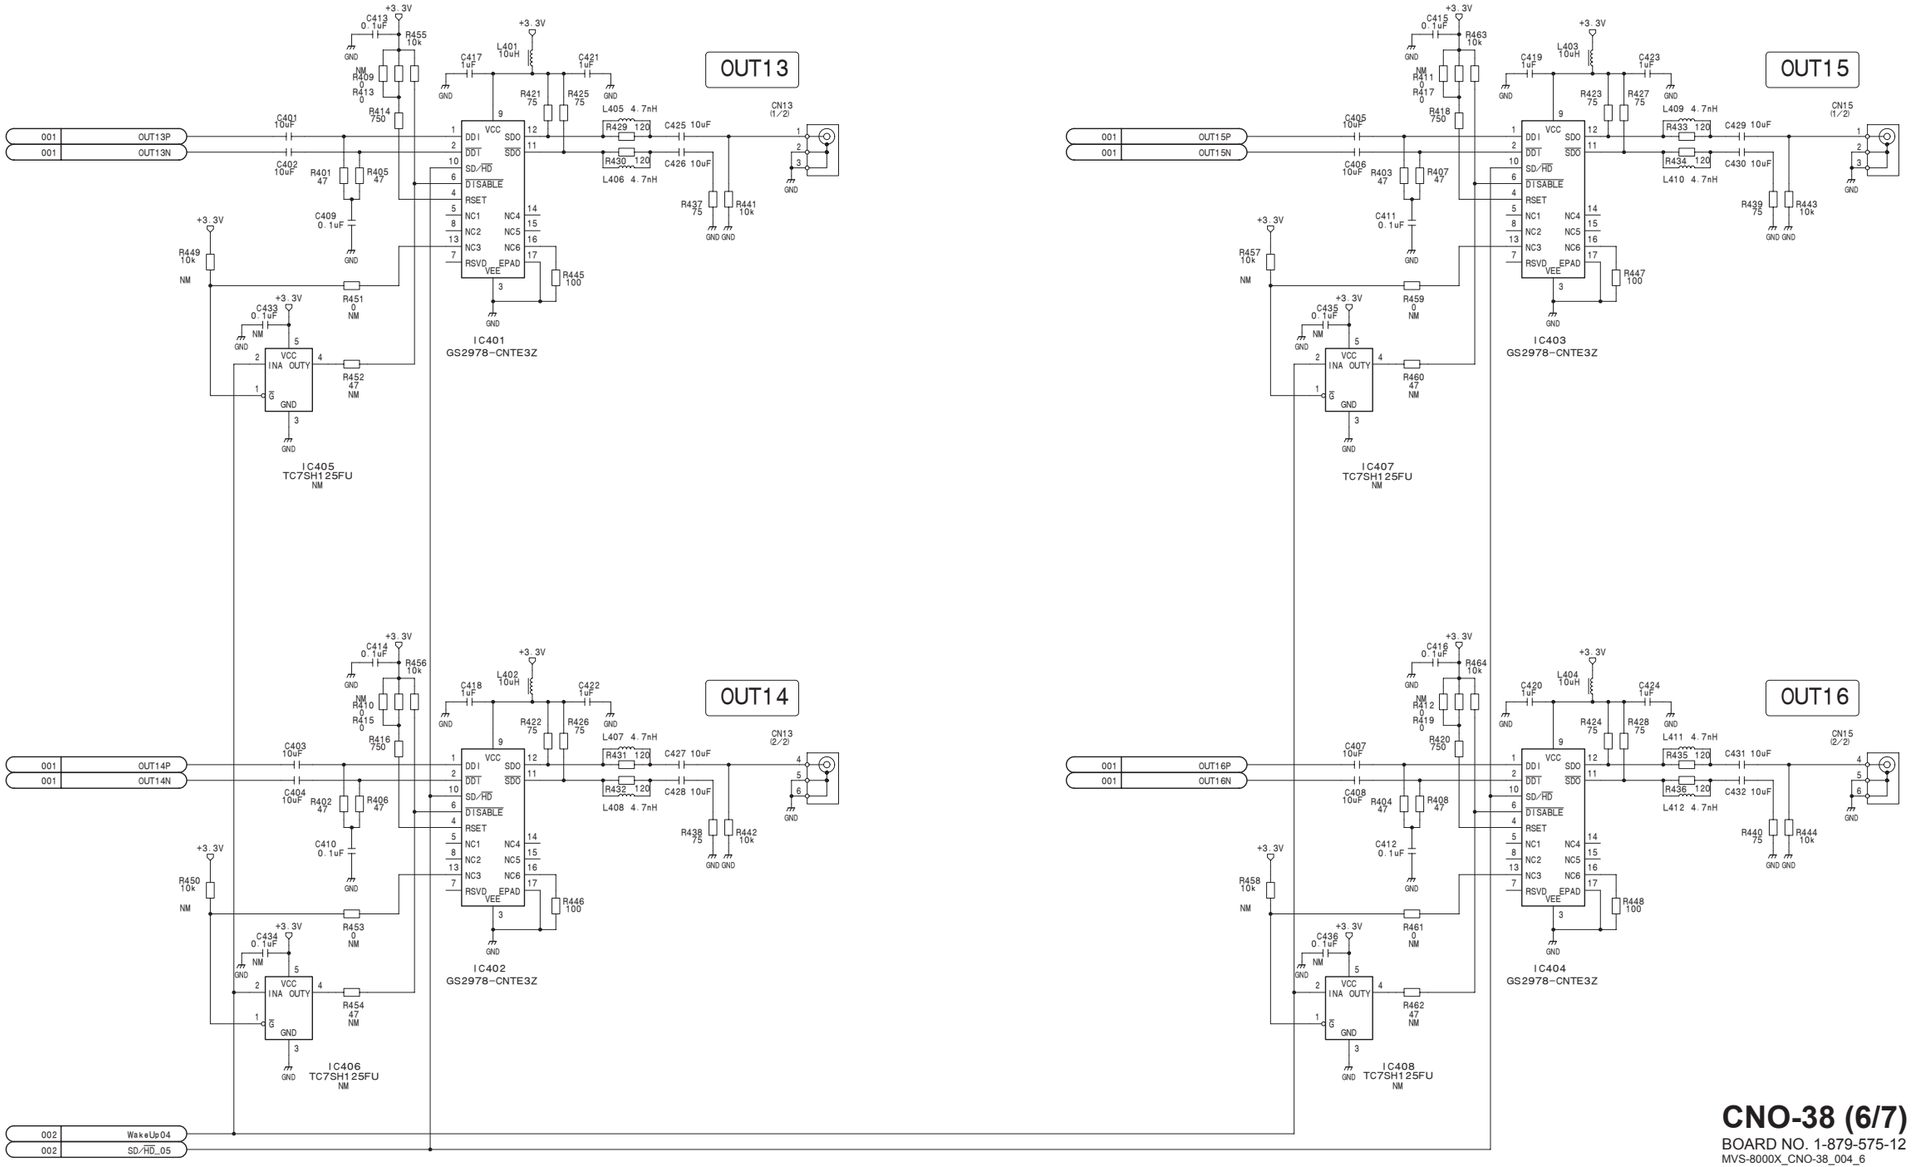

CNO-38 (6/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38_004_6

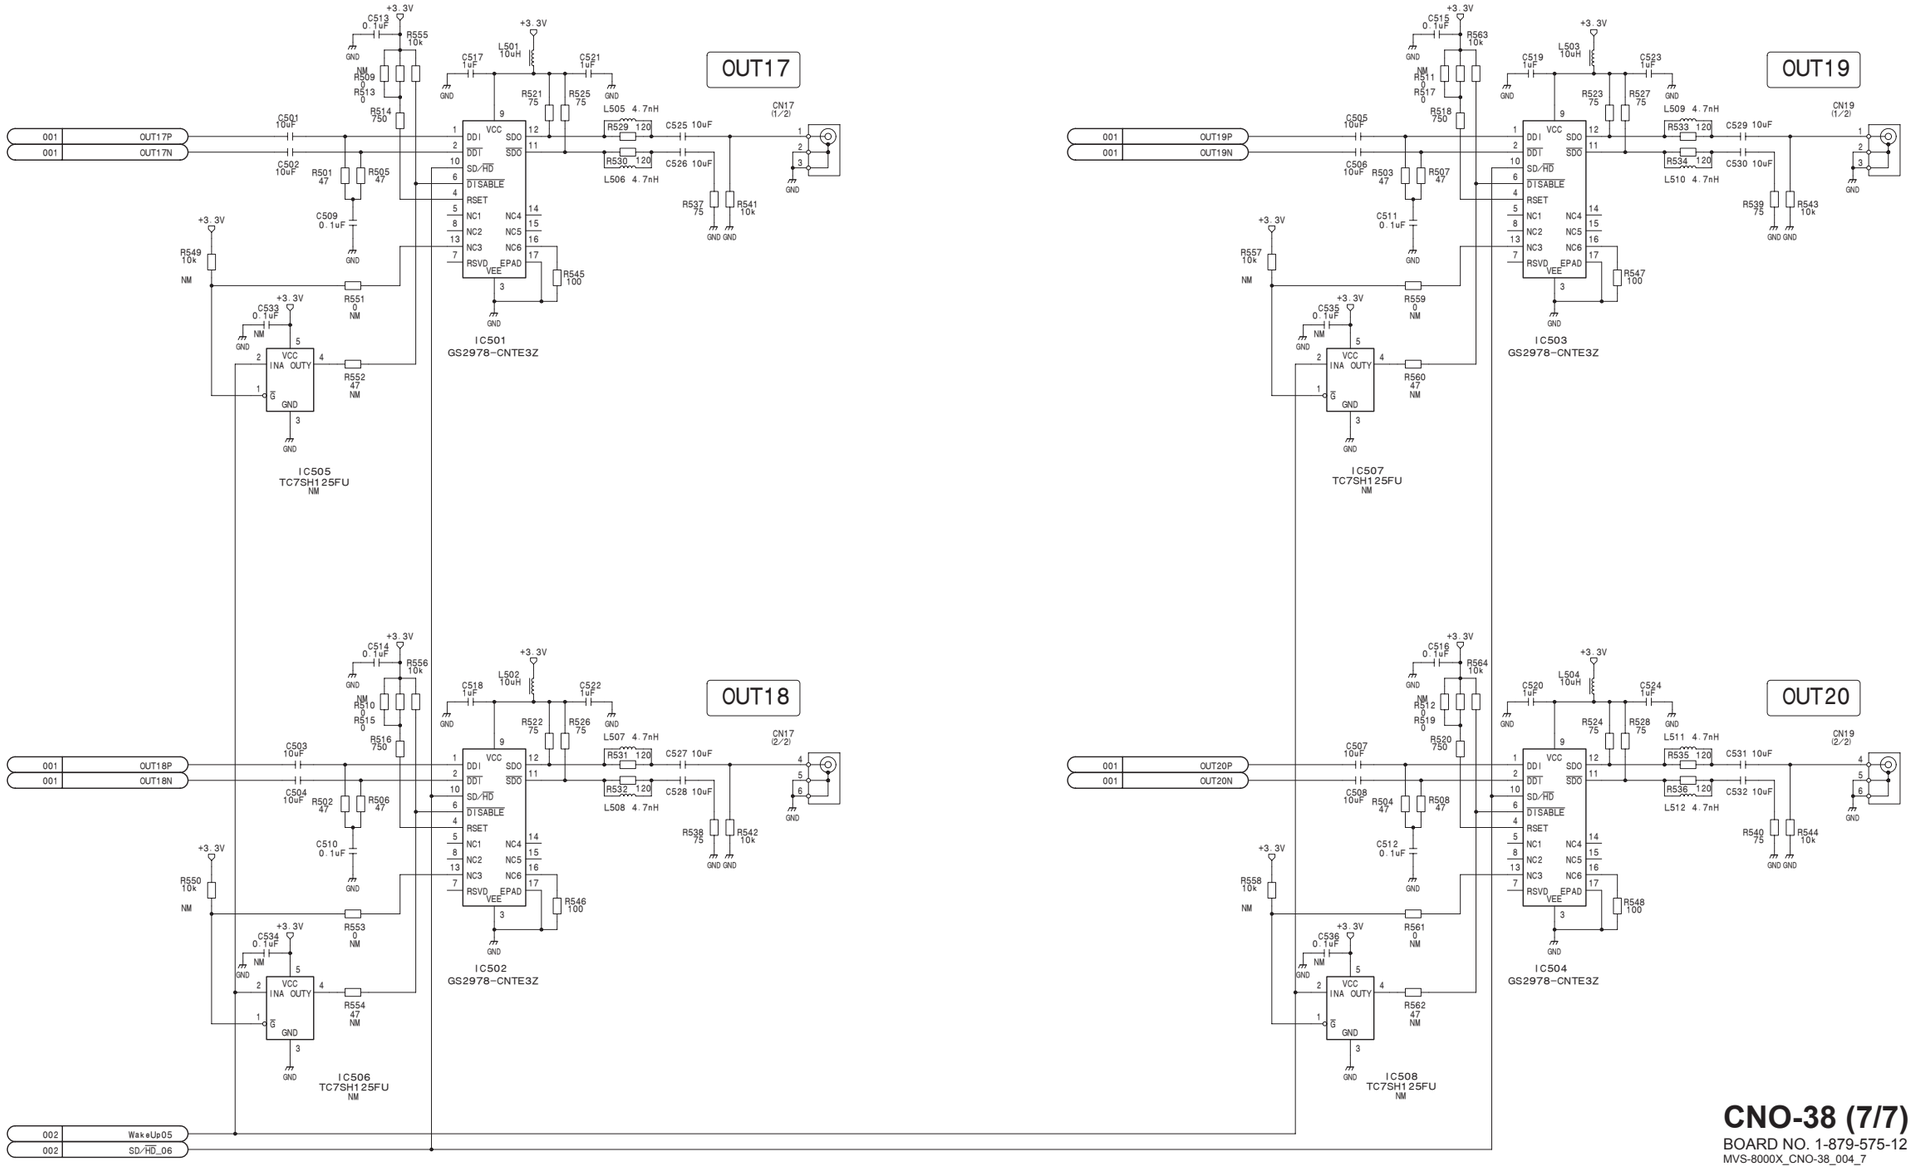

CNO-38 (7/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38_004_7

CNO-38A (1/4)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	IFDP)	IFDN)	GND	IVDP)	IVDN)	GND
2	IVCLKP)	IVCLKN)	GND	(I 2C_SCL_F)	(I 2C_SDA_F)	GND
3	ISLOT_No 4)	ISLOT_No 5)	GND	ISLOT_No 6)	ISLOT_No 7)	GND
4	ISLOT_No 0)	ISLOT_No 1)	GND	ISLOT_No 2)	ISLOT_No 3)	GND
5	IBD_EXT_F)	BD_EXT IBD_EXT_R)	GND	SD/HD_1	SD/HD_2	GND
6	IRESET)	IDC_ENBL)	GND	SD/HD_0	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-38A (1/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38A_999_1

4-134

CNO-38A (2/4)
SUFFIX: -11

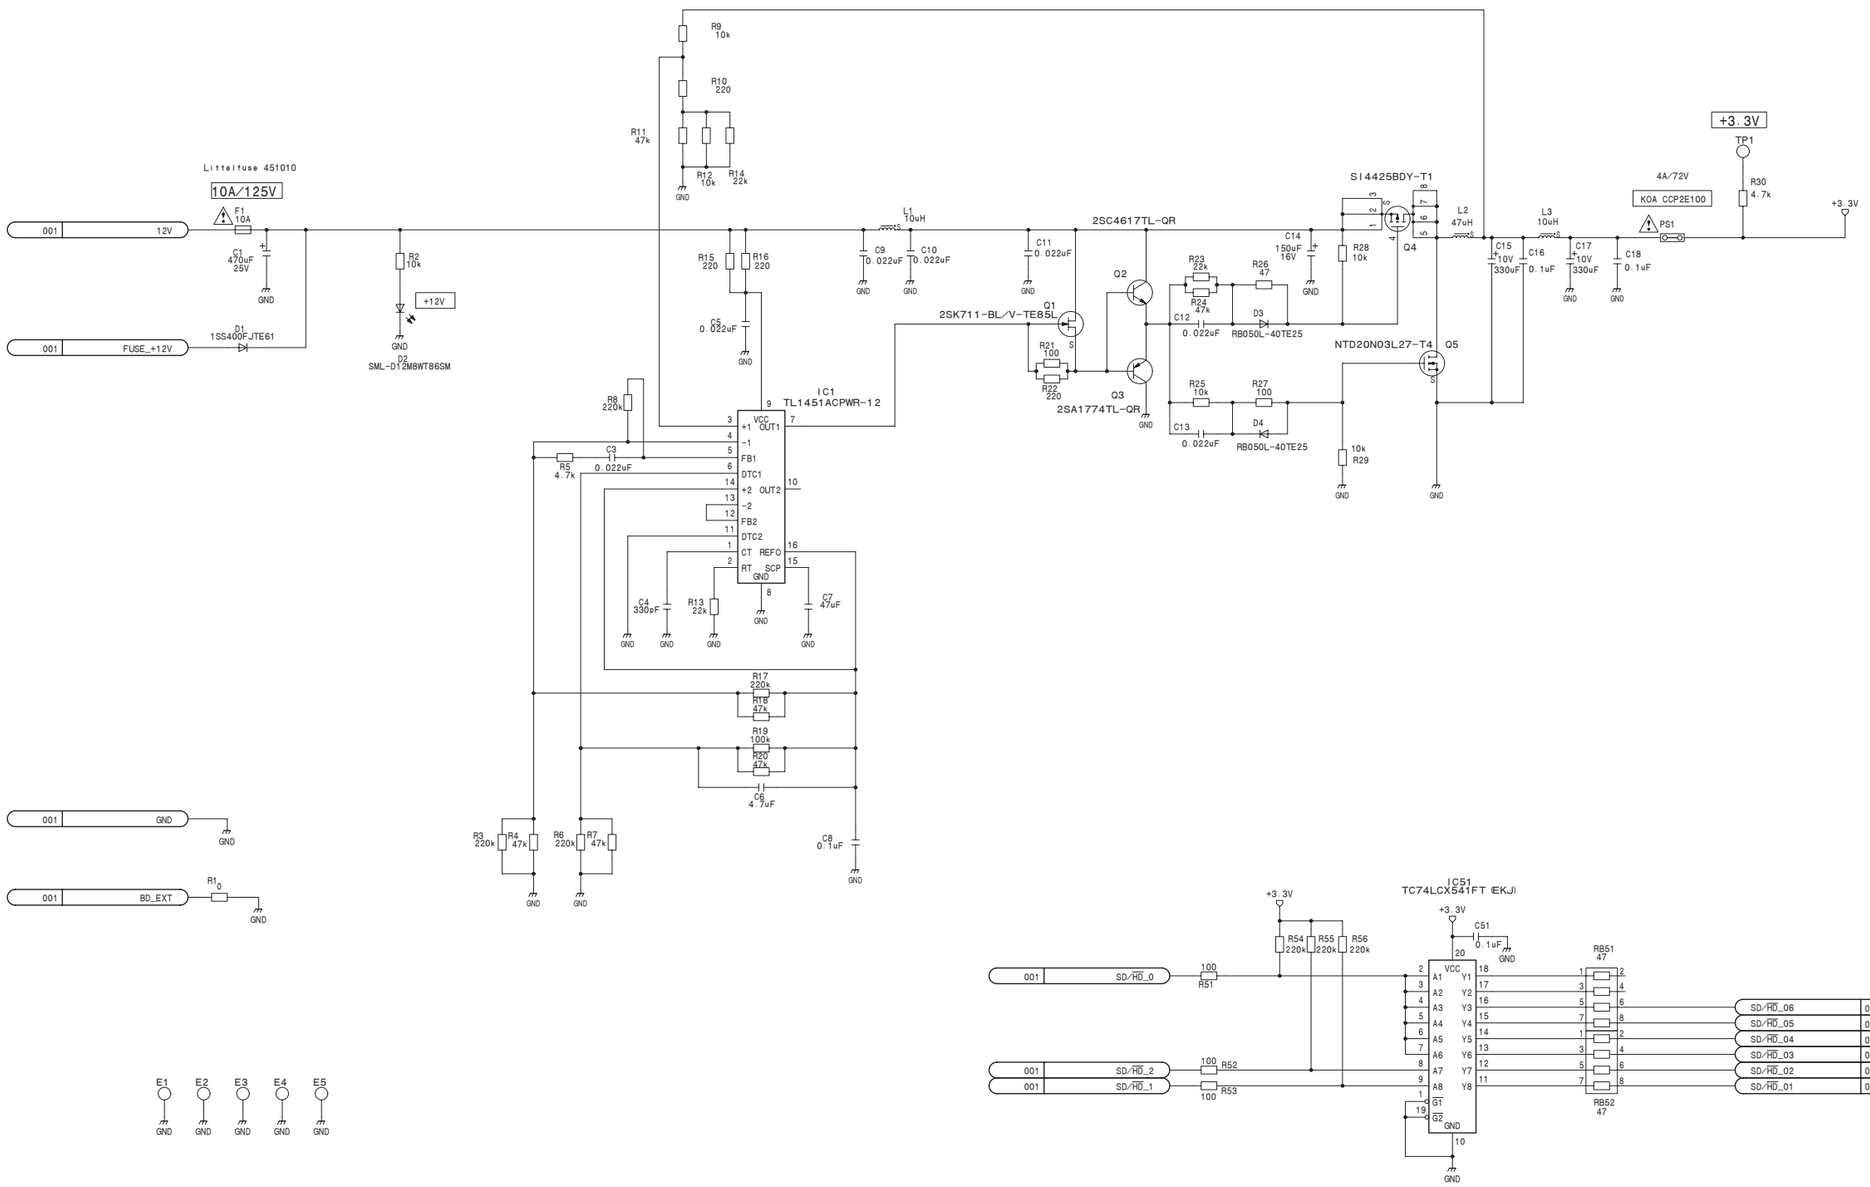

CNO-38A (2/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38A_999_2

CNO-38A (3/4)
SUFFIX: -11

CNO-38A (3/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38A_999_3

4-136

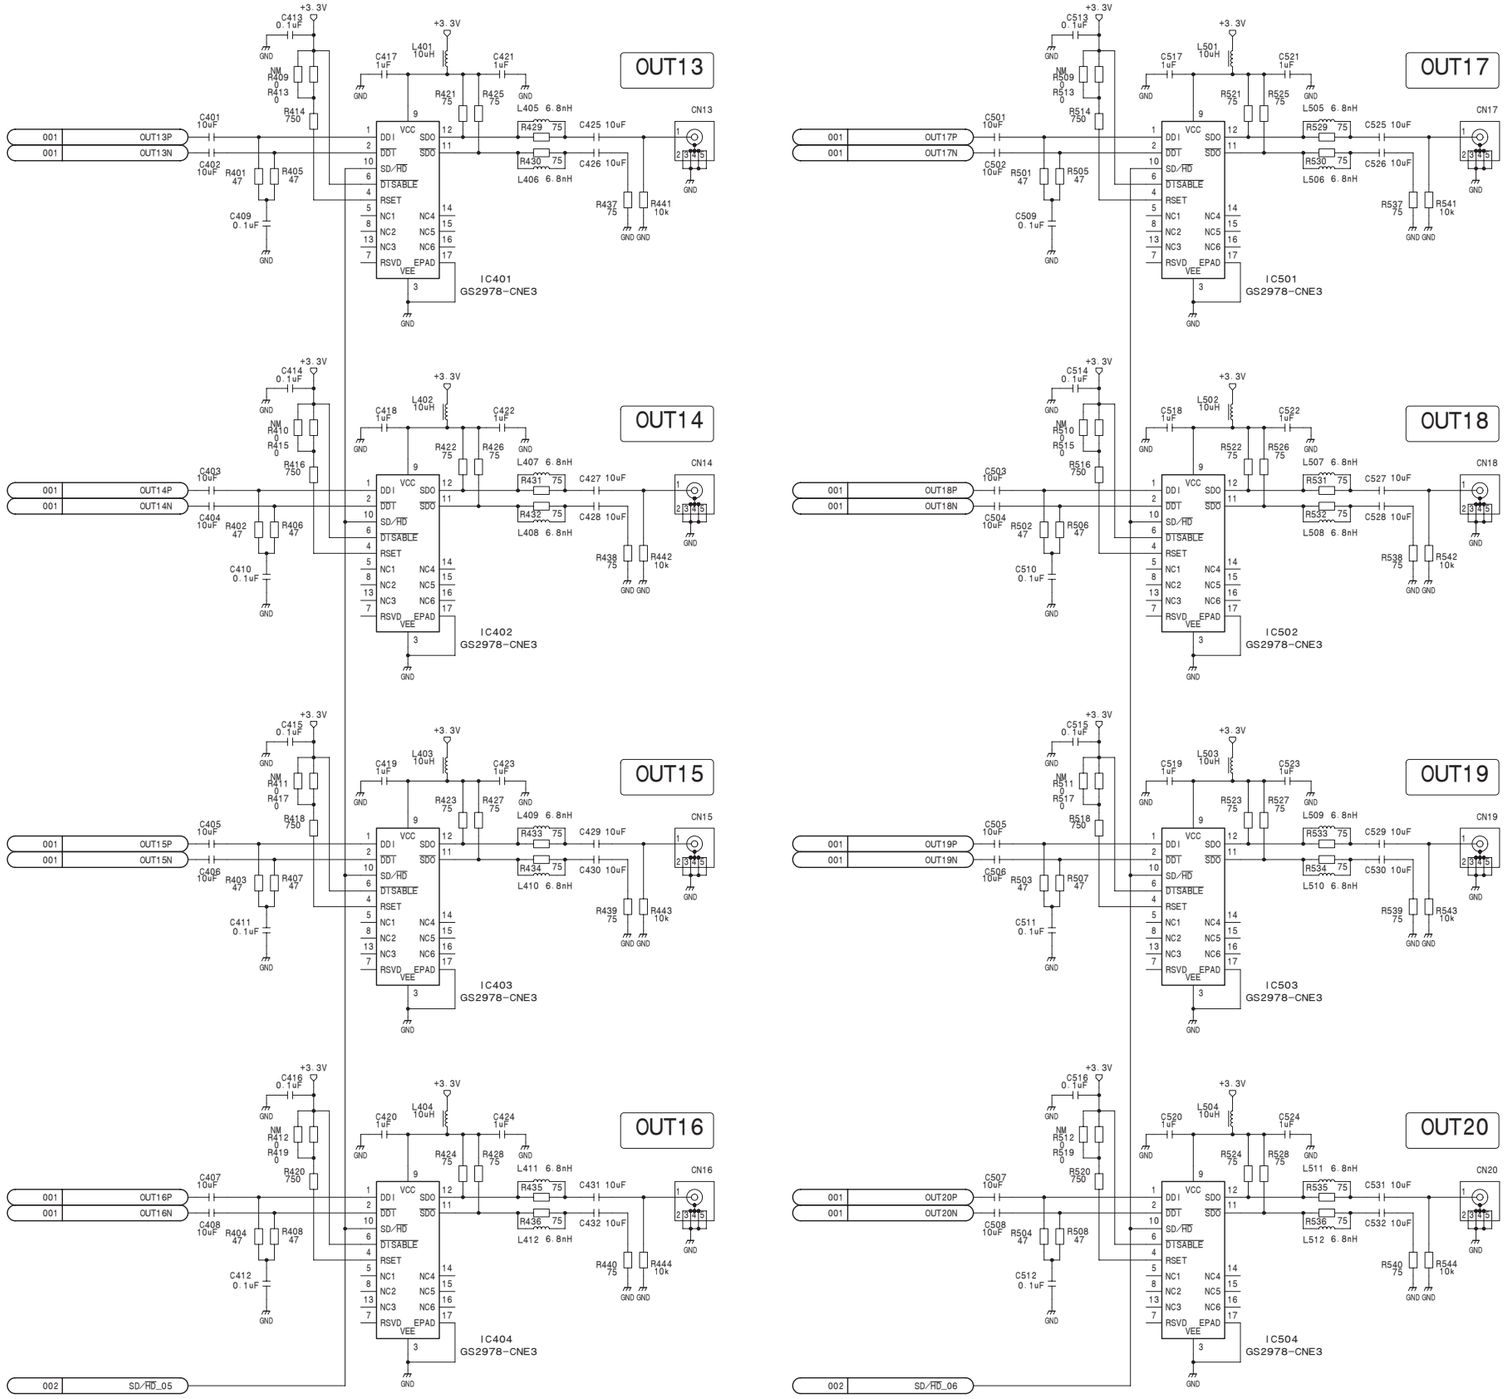

CNO-38A (4/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38A_999_4

CNO-38A (1/7)
SUFFIX: -12

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	(SLOT_No4)	(SLOT_No5)	GND	(SLOT_No6)	(SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	SD/$\overline{HD}$_1	SD/$\overline{HD}$_2	GND
6	(RESET)	(DC_ENBL)	GND	SD/$\overline{HD}$_0	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-38A (1/7)

BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_1

4-134 (a)

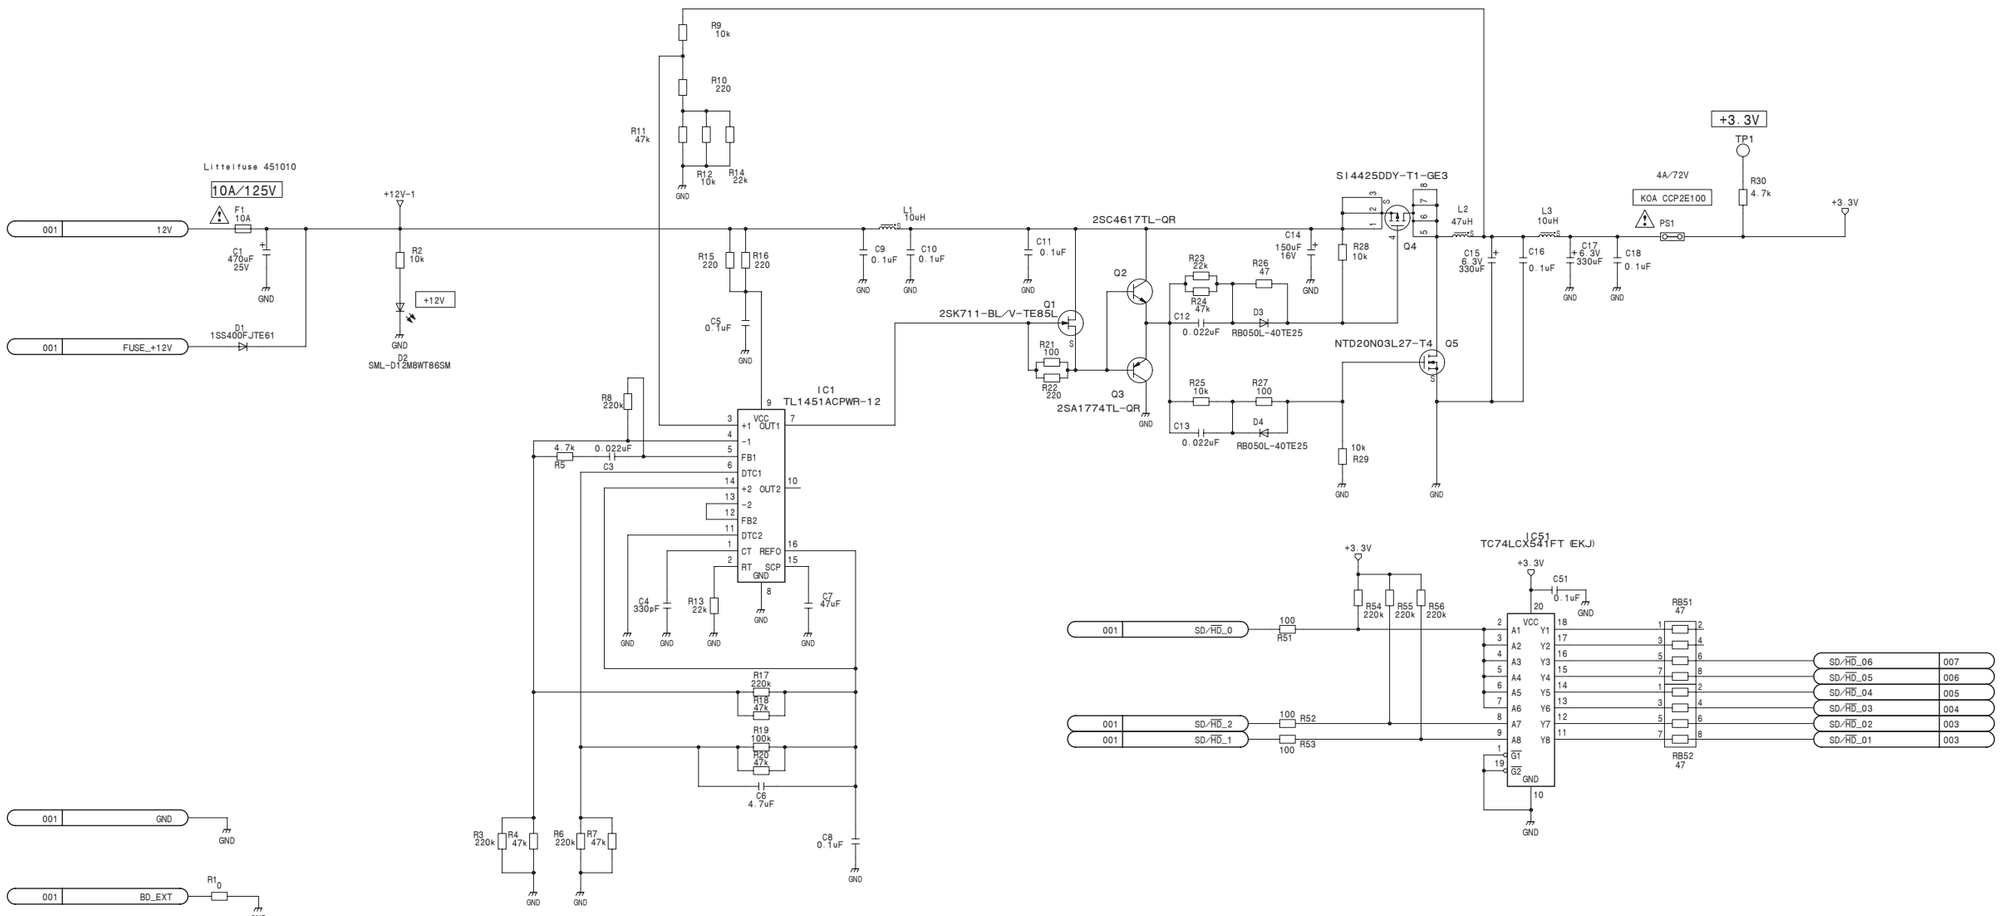

CNO-38A (2/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_2

CNO-38A (3/7) **SUFFIX: -12**

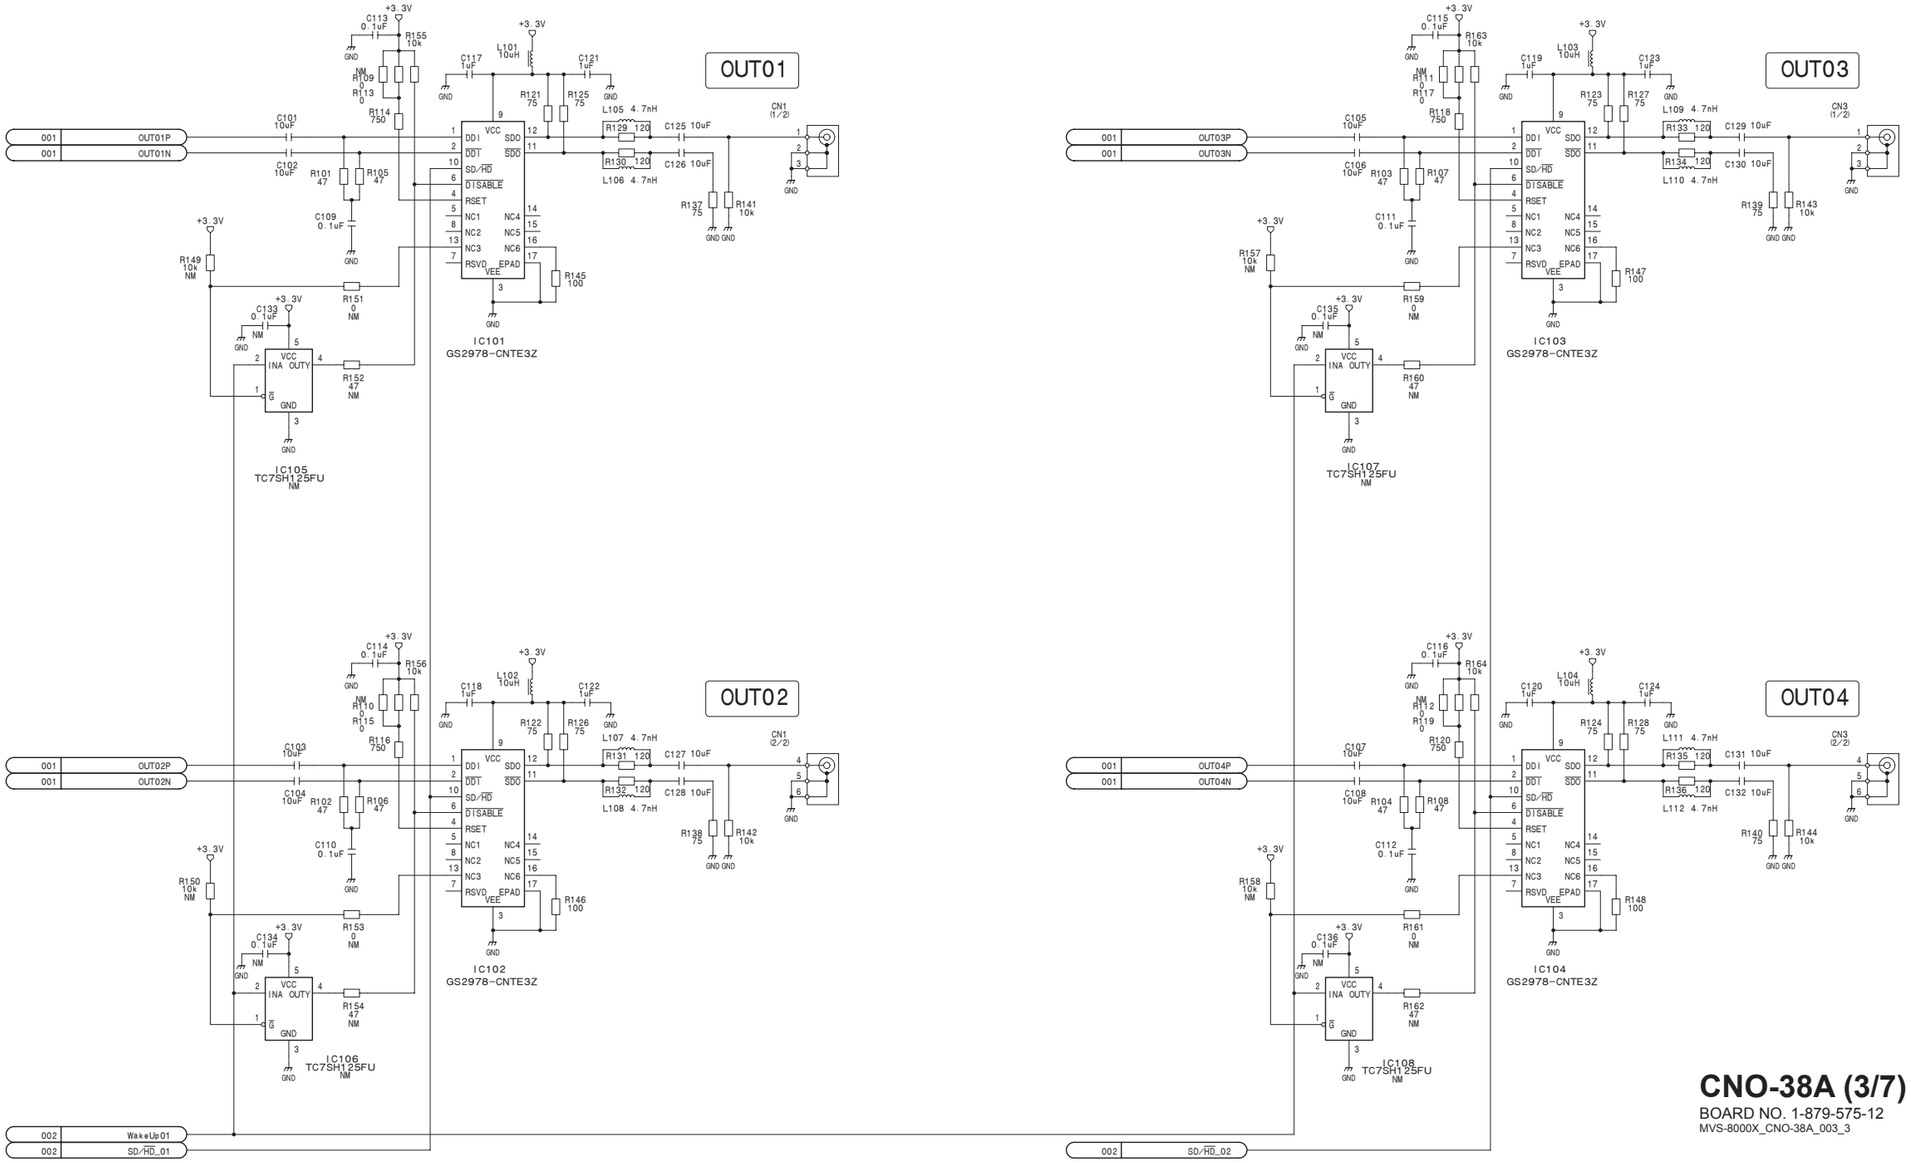

CNO-38A (3/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_3

CNO-38A (4/7)
SUFFIX: -12

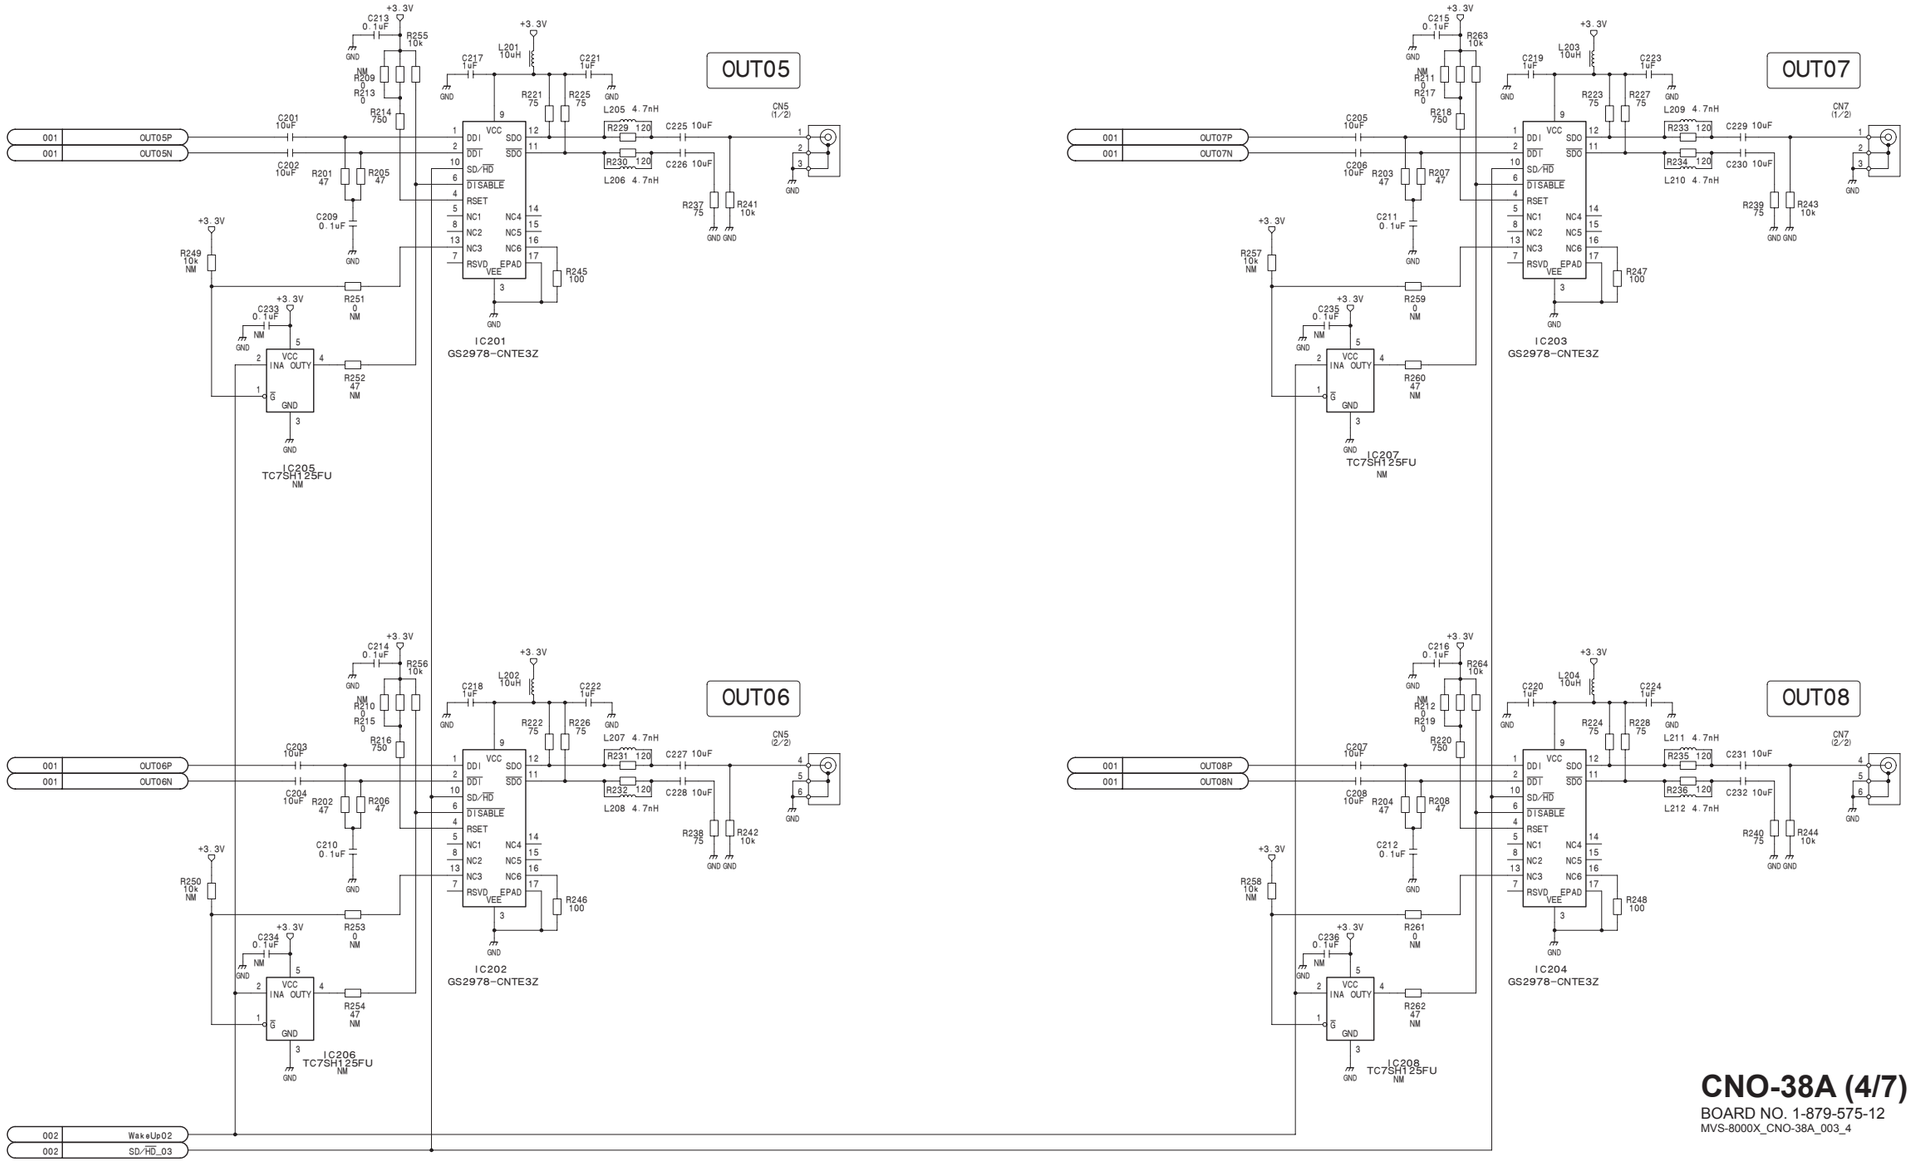

CNO-38A (4/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_4

CNO-38A (5/7)
SUFFIX: -12

CNO-38A (5/7)
SUFFIX: -12

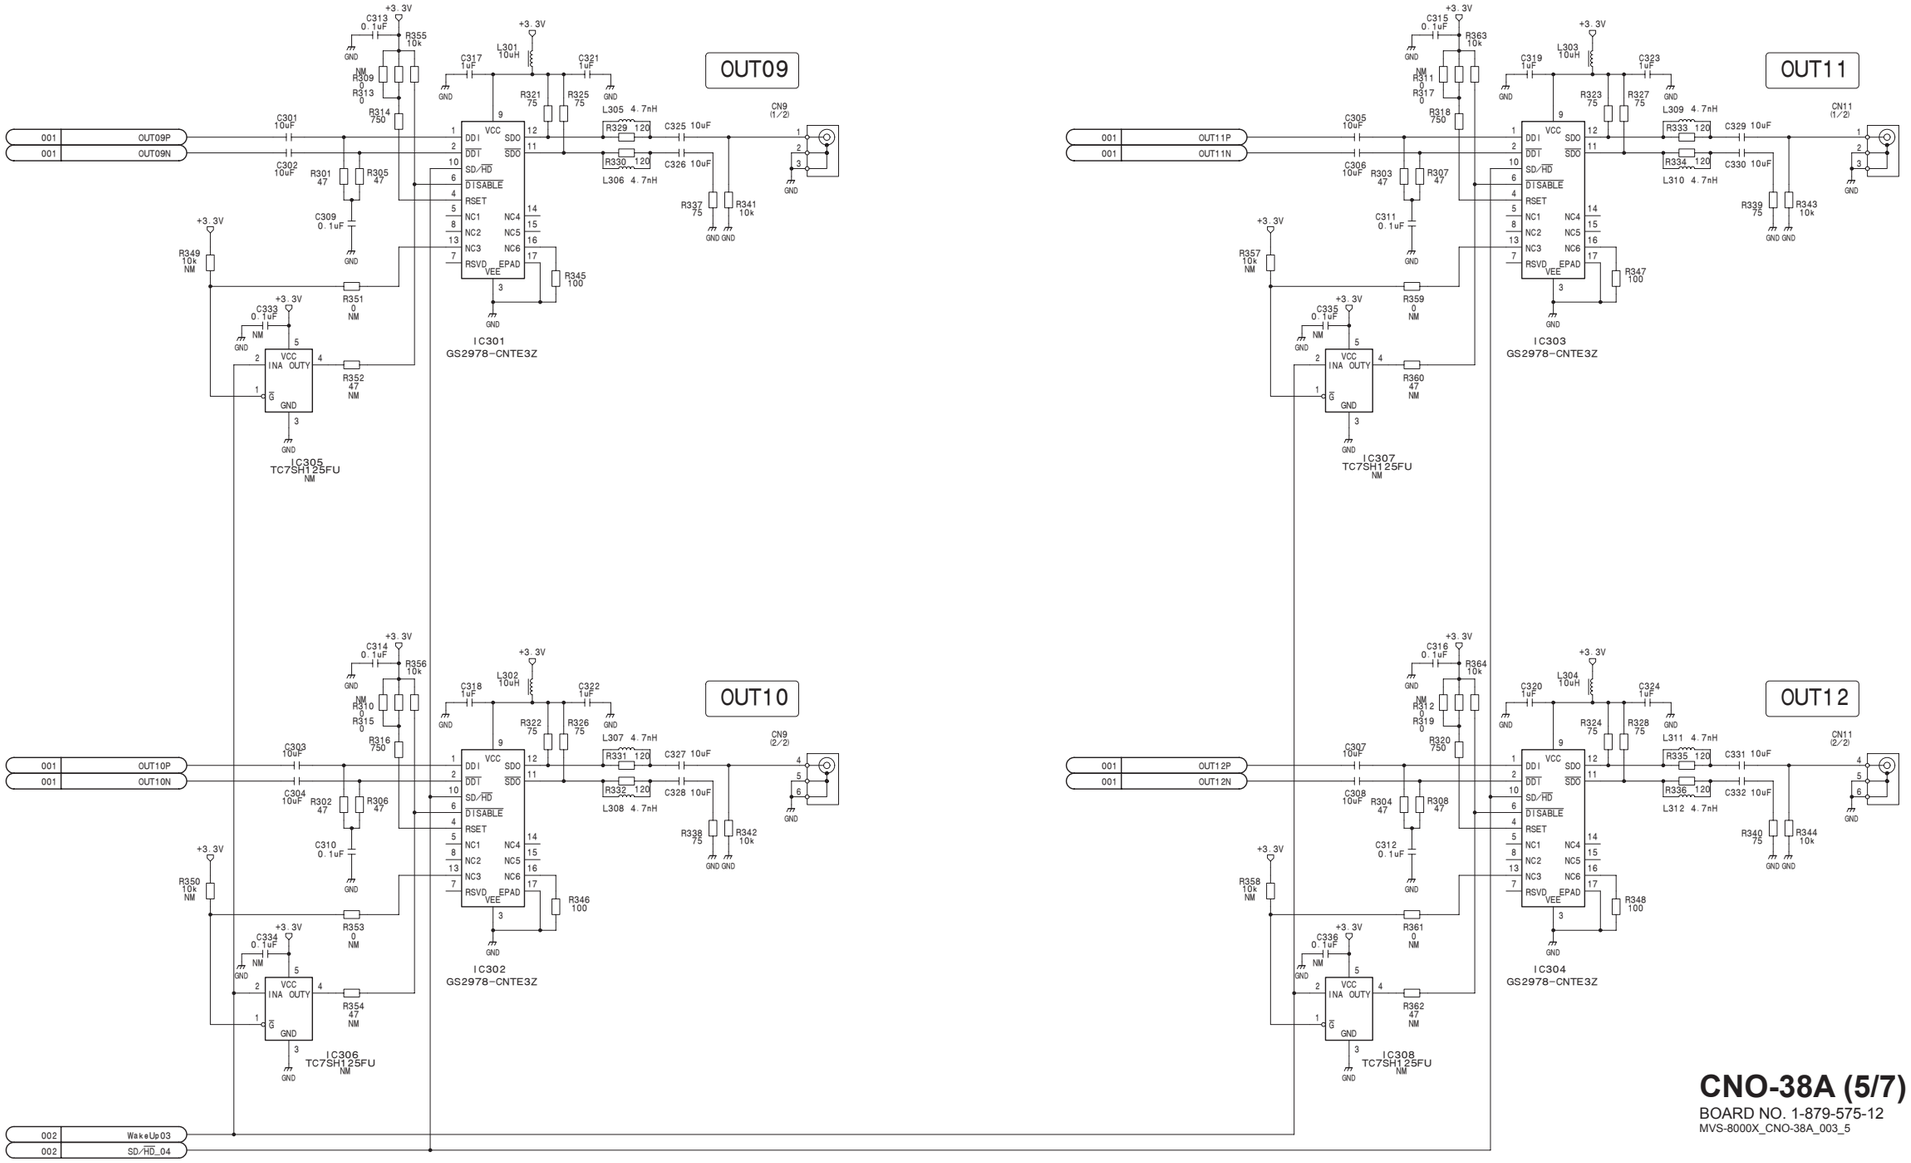

CNO-38A (5/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_5

4-138 (a)

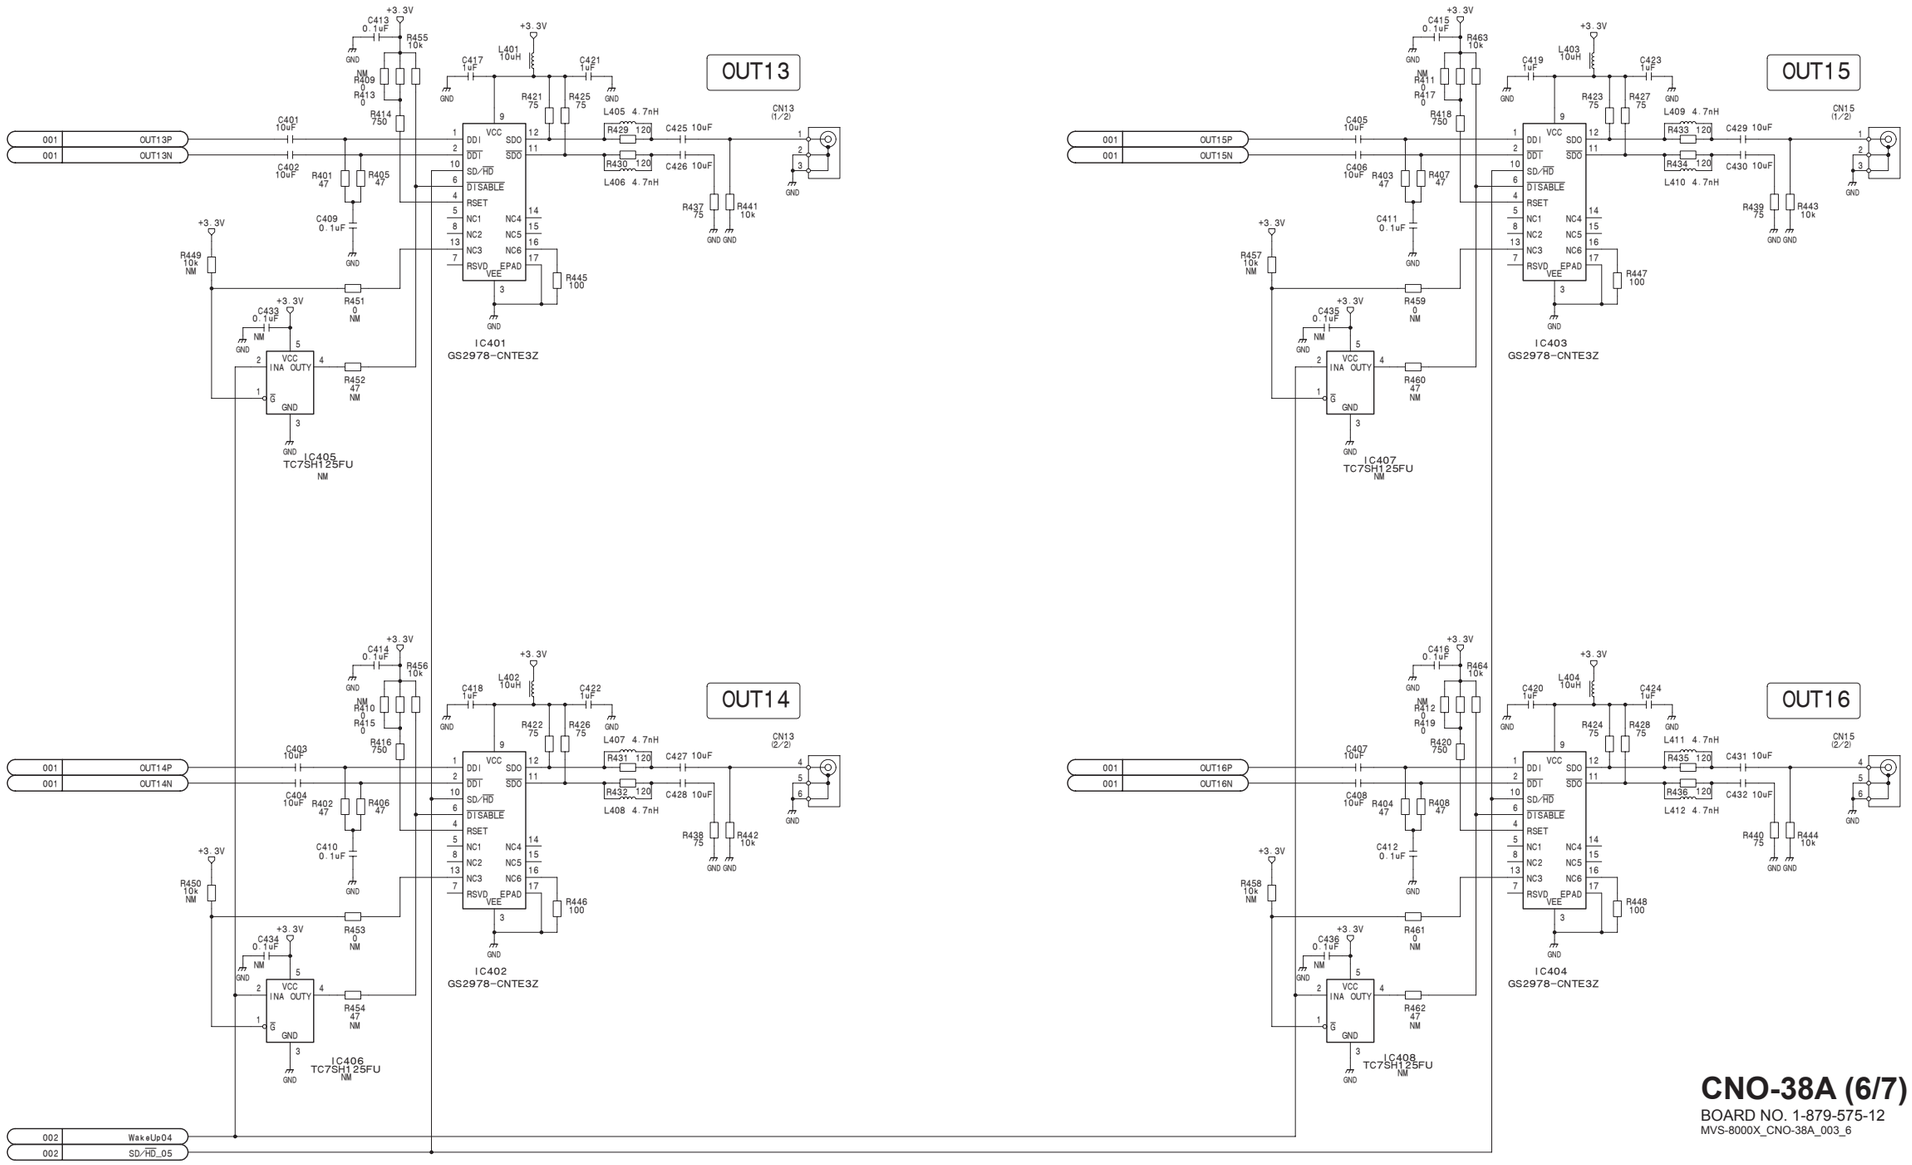

CNO-38A (6/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_6

CNO-38A (7/7) **SUFFIX: -12**

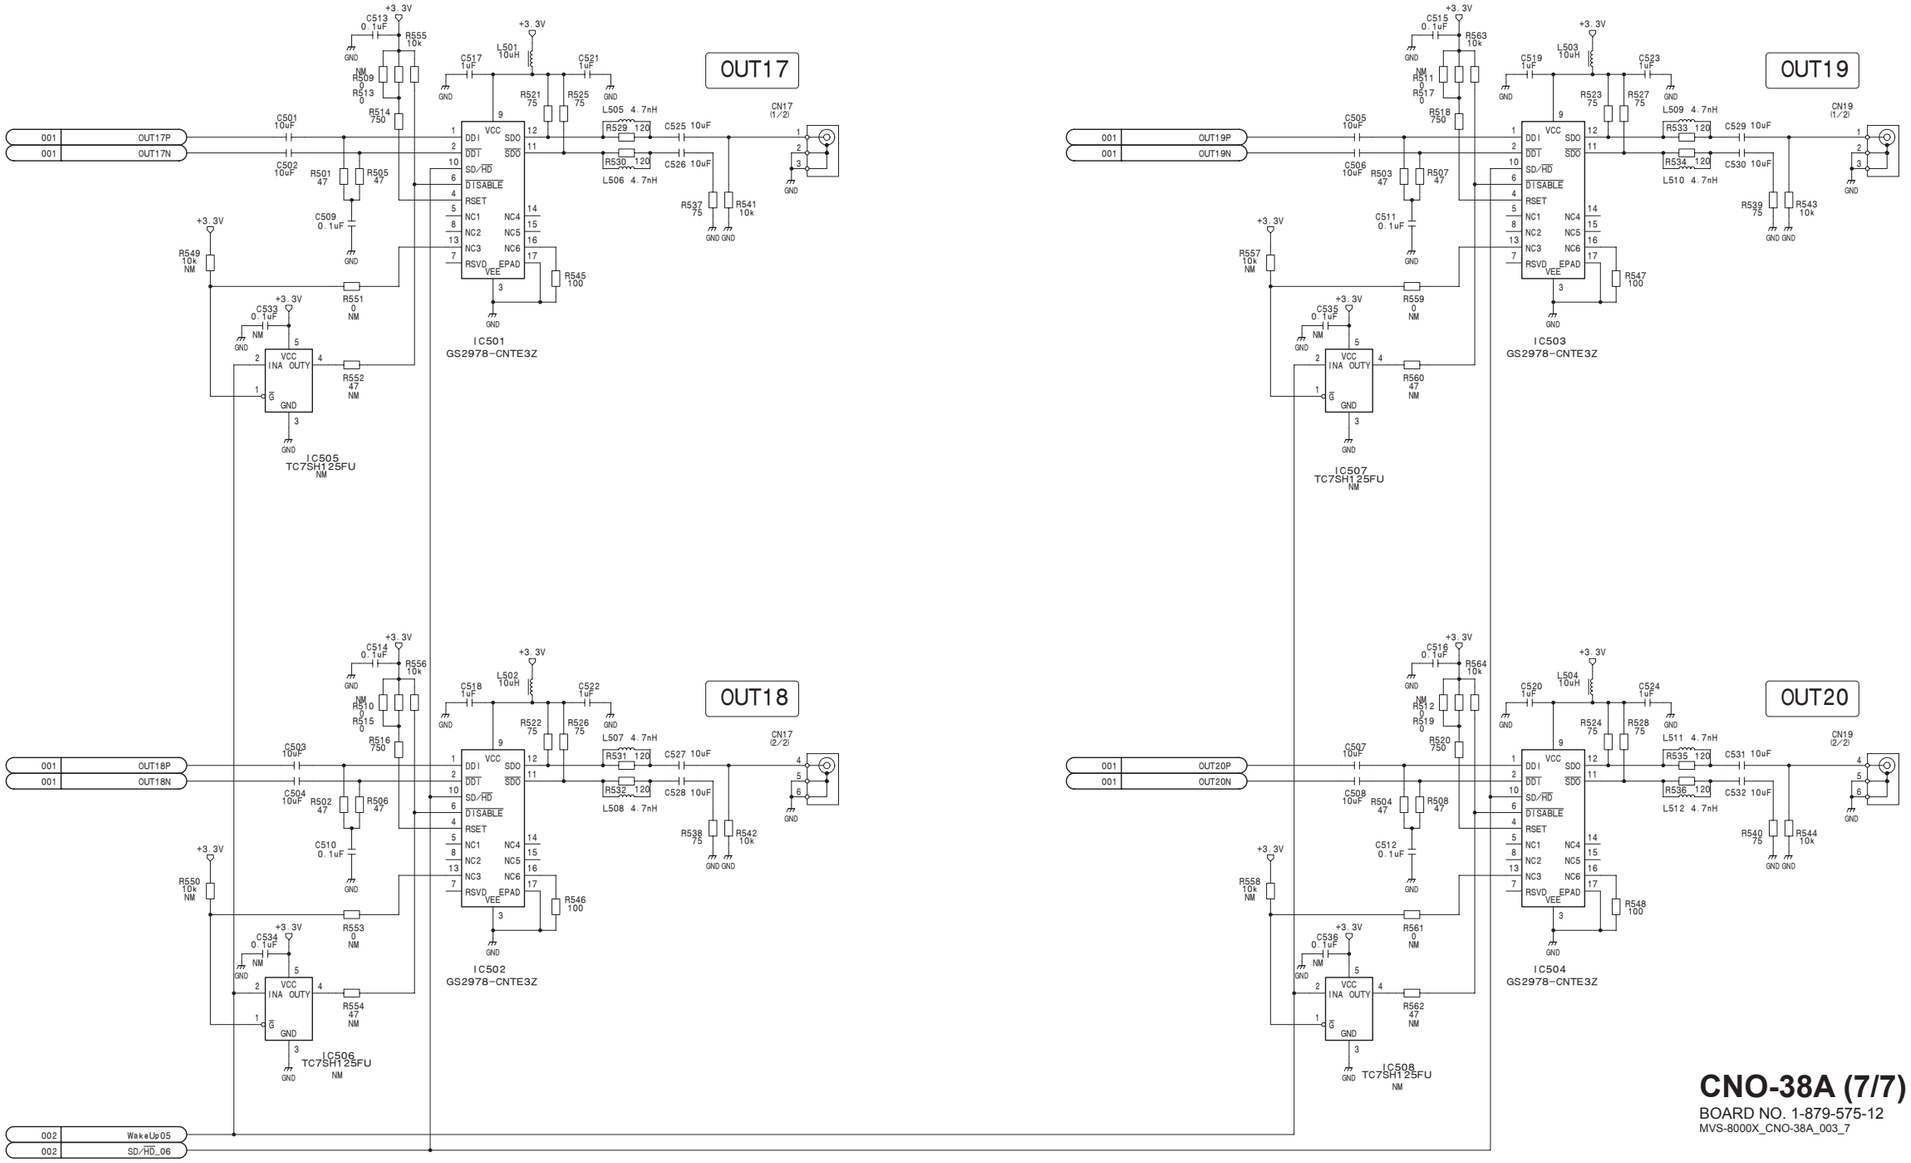

CNO-38A (7/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38A_003_7

CNO-38B (1/4)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	(SLOT_No4)	(SLOT_No5)	GND	(SLOT_No6)	(SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	SD/$\overline{HD}$_1	SD/$\overline{HD}$_2	GND
6	(RESET)	(DC_ENBL)	GND	SD/$\overline{HD}$_0	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-38B (1/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38B_999_1

4-141

CNO-38B (2/4) **SUFFIX: -11**

CNO-38B (2/4)

BOARD NO. 1-879-575-11

MVS-8000X_CNO-38B_999_2

CNO-38B (3/4)

SUFFIX: -11

CNO-38B (3/4)

SUFFIX: -11

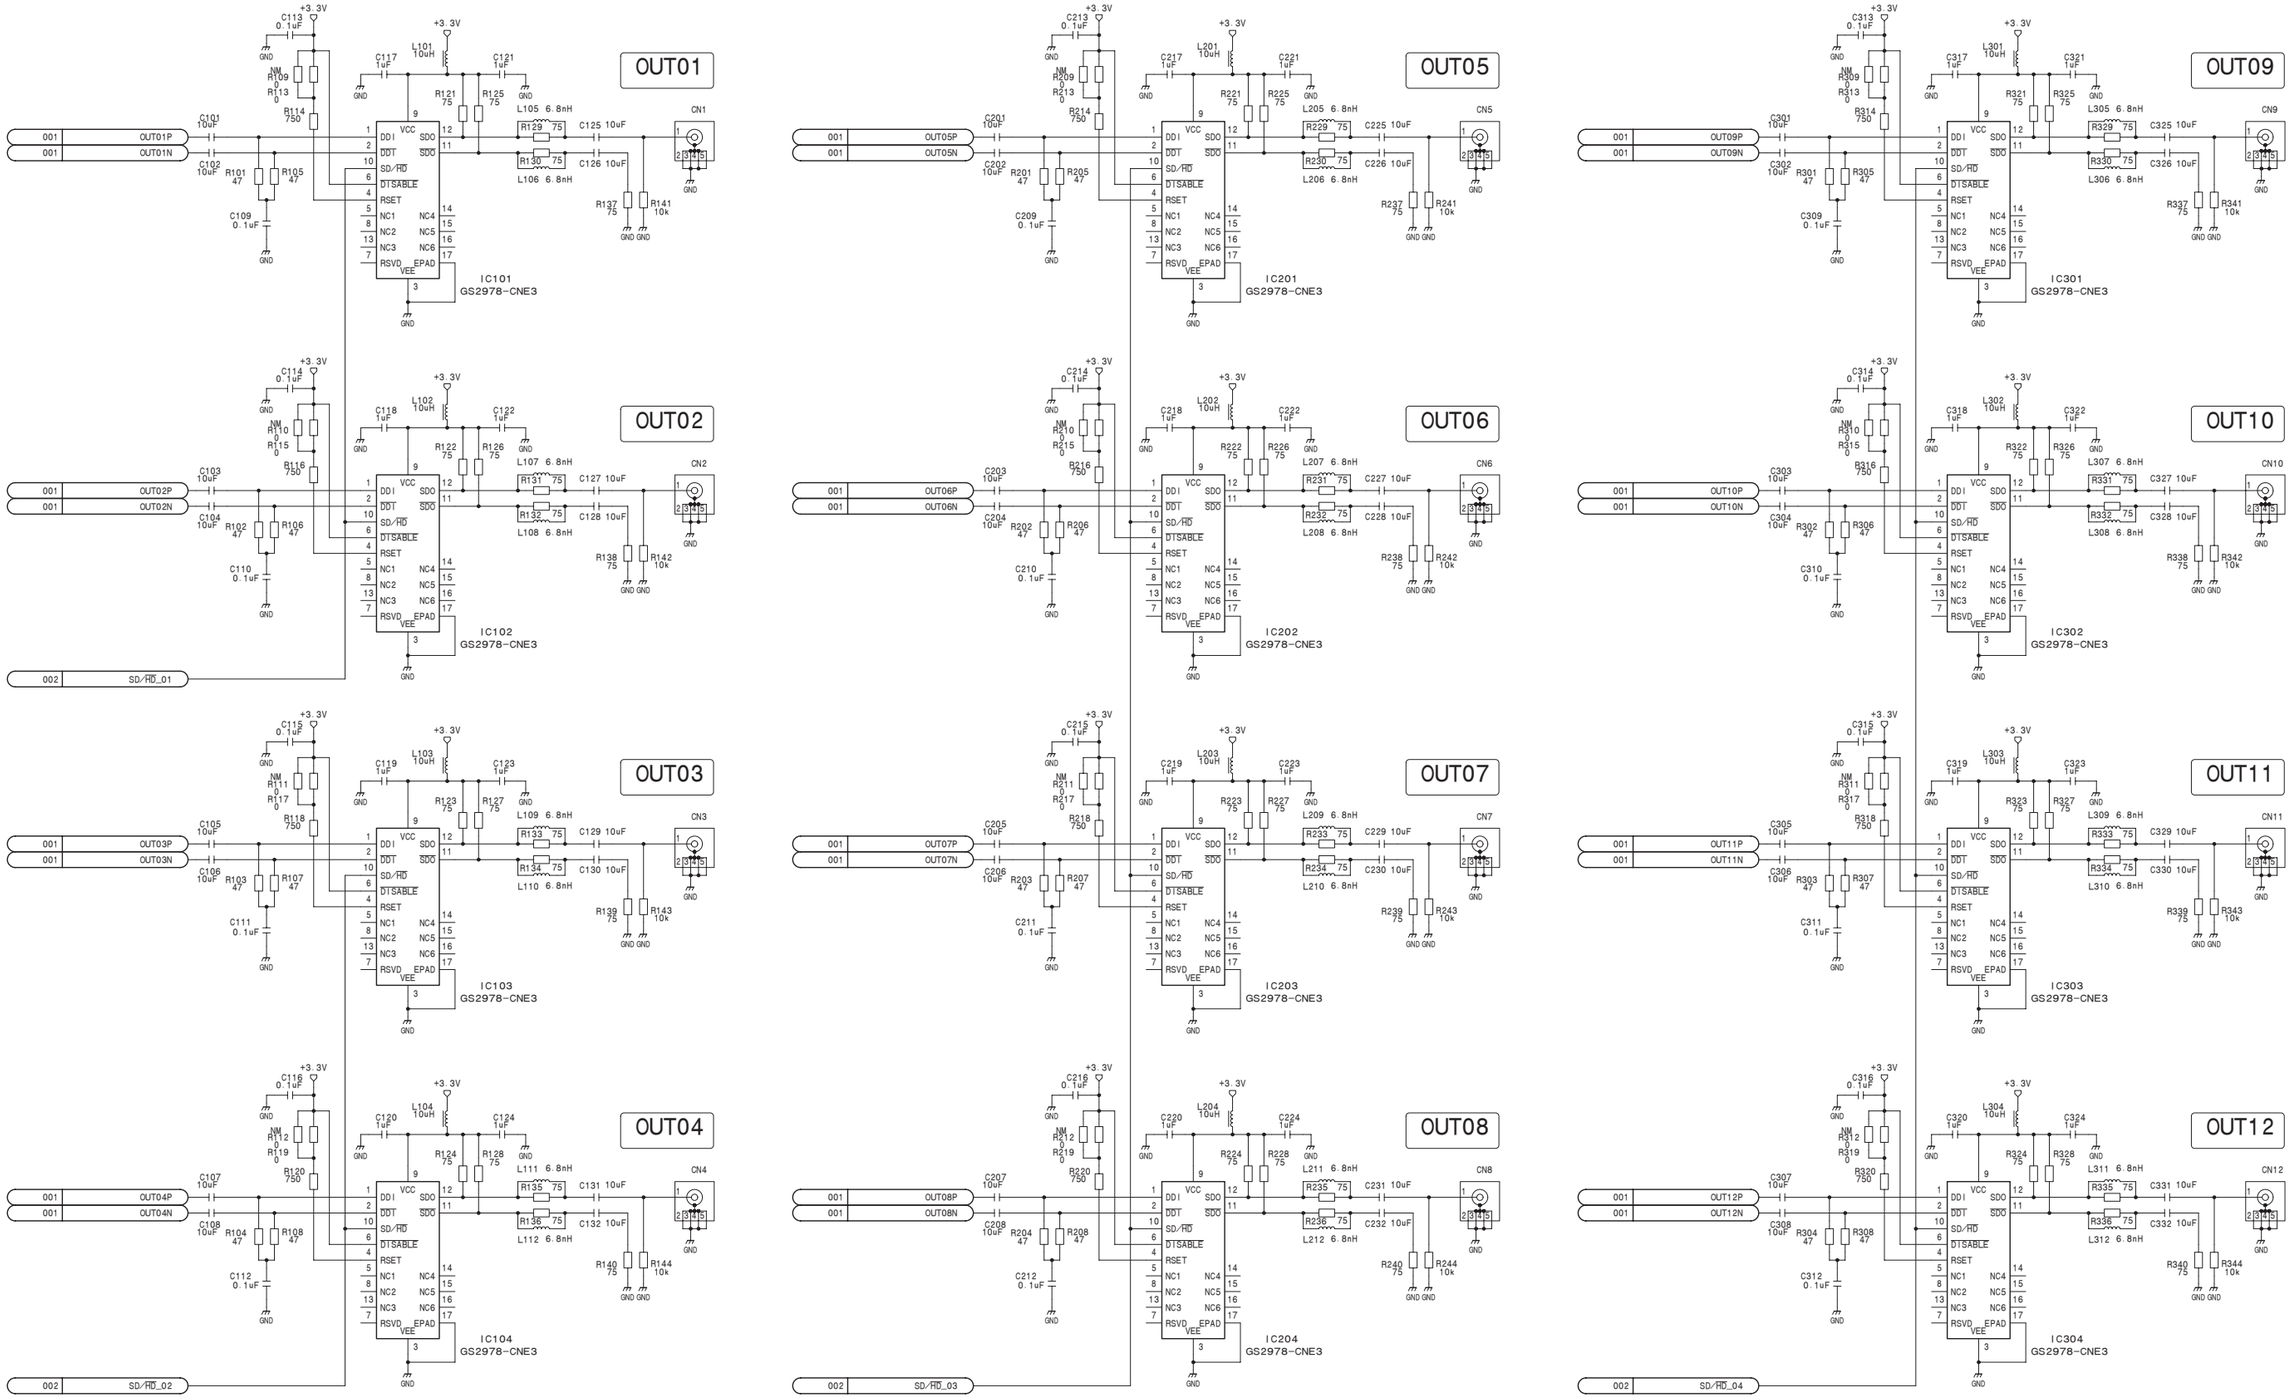

CNO-38B (4/4)
SUFFIX: -11

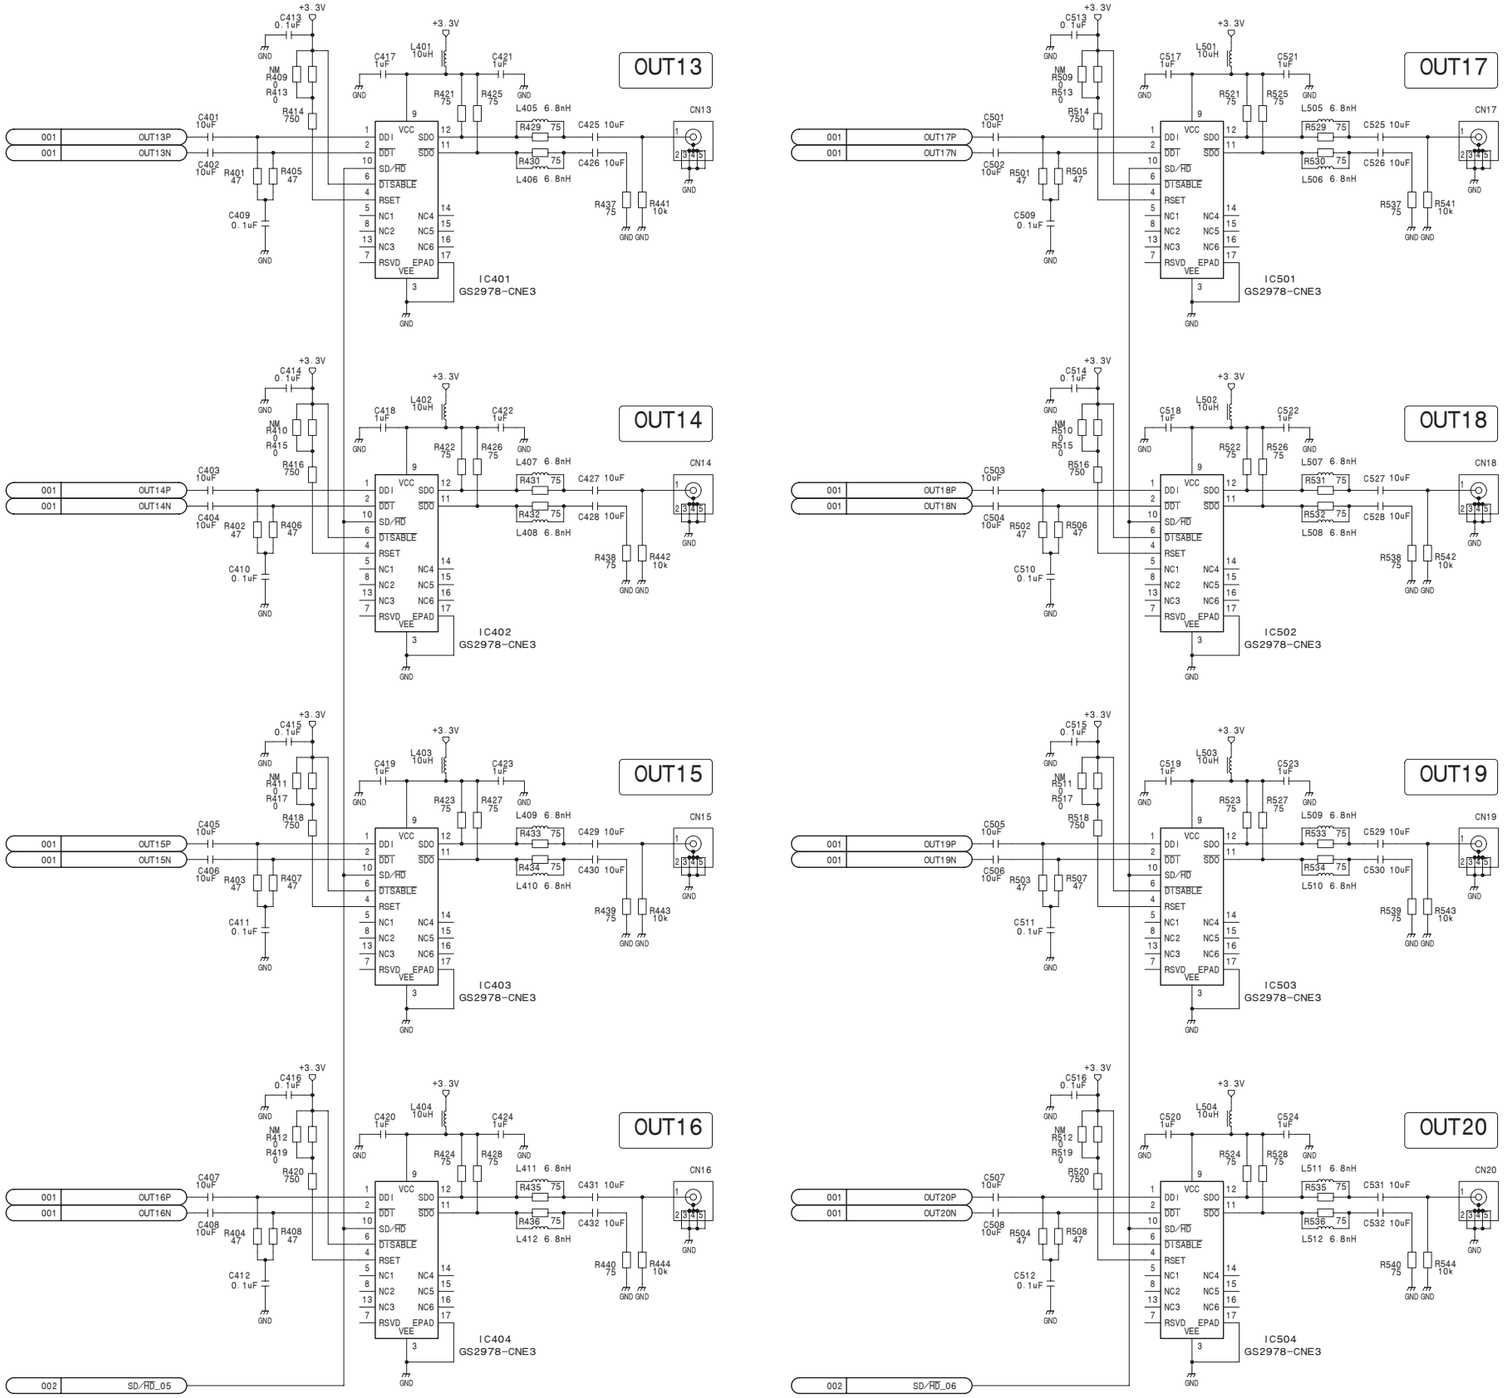

CNO-38B (4/4)
BOARD NO. 1-879-575-11
MVS-8000X_CNO-38B_999_4

4-144

CNO-38B (1/7)
SUFFIX: -12

CNM1

	A	B	BG	C	D	DG
1			GND	OUT01P	OUT01N	GND
2			GND	OUT02P	OUT02N	GND
3			GND	OUT03P	OUT03N	GND
4			GND	OUT04P	OUT04N	GND
5			GND	OUT05P	OUT05N	GND
6			GND	OUT06P	OUT06N	GND
7			GND	OUT07P	OUT07N	GND
8			GND	OUT08P	OUT08N	GND
9			GND	OUT09P	OUT09N	GND
10			GND	OUT10P	OUT10N	GND

CNF1

	A	B	BG	C	D	DG
1			GND	OUT11P	OUT11N	GND
2			GND	OUT12P	OUT12N	GND
3			GND	OUT13P	OUT13N	GND
4			GND	OUT14P	OUT14N	GND
5			GND	OUT15P	OUT15N	GND
6			GND	OUT16P	OUT16N	GND
7			GND	OUT17P	OUT17N	GND
8			GND	OUT18P	OUT18N	GND
9			GND	OUT19P	OUT19N	GND
10			GND	OUT20P	OUT20N	GND

CNB1

	A	B	BG	C	D	DG
1	(FDP)	(FDN)	GND	(VDP)	(VDN)	GND
2	(VCLKP)	(VCLKN)	GND	(I2C_SCL_F)	(I2C_SDA_F)	GND
3	(SLOT_No4)	(SLOT_No5)	GND	(SLOT_No6)	(SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	(BD_EXT_F)	BD_EXT (BD_EXT_R)	GND	SD/$\overline{HD}$_1	SD/$\overline{HD}$_2	GND
6	(RESET)	(DC_ENBL)	GND	SD/$\overline{HD}$_0	FUSE_+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNO-38B (1/7)

BOARD NO. 1-879-575-12
MVS-8000X_CNO-38B_003_1

4-141 (a)

CNO-38B (2/7) **SUFFIX: -12**

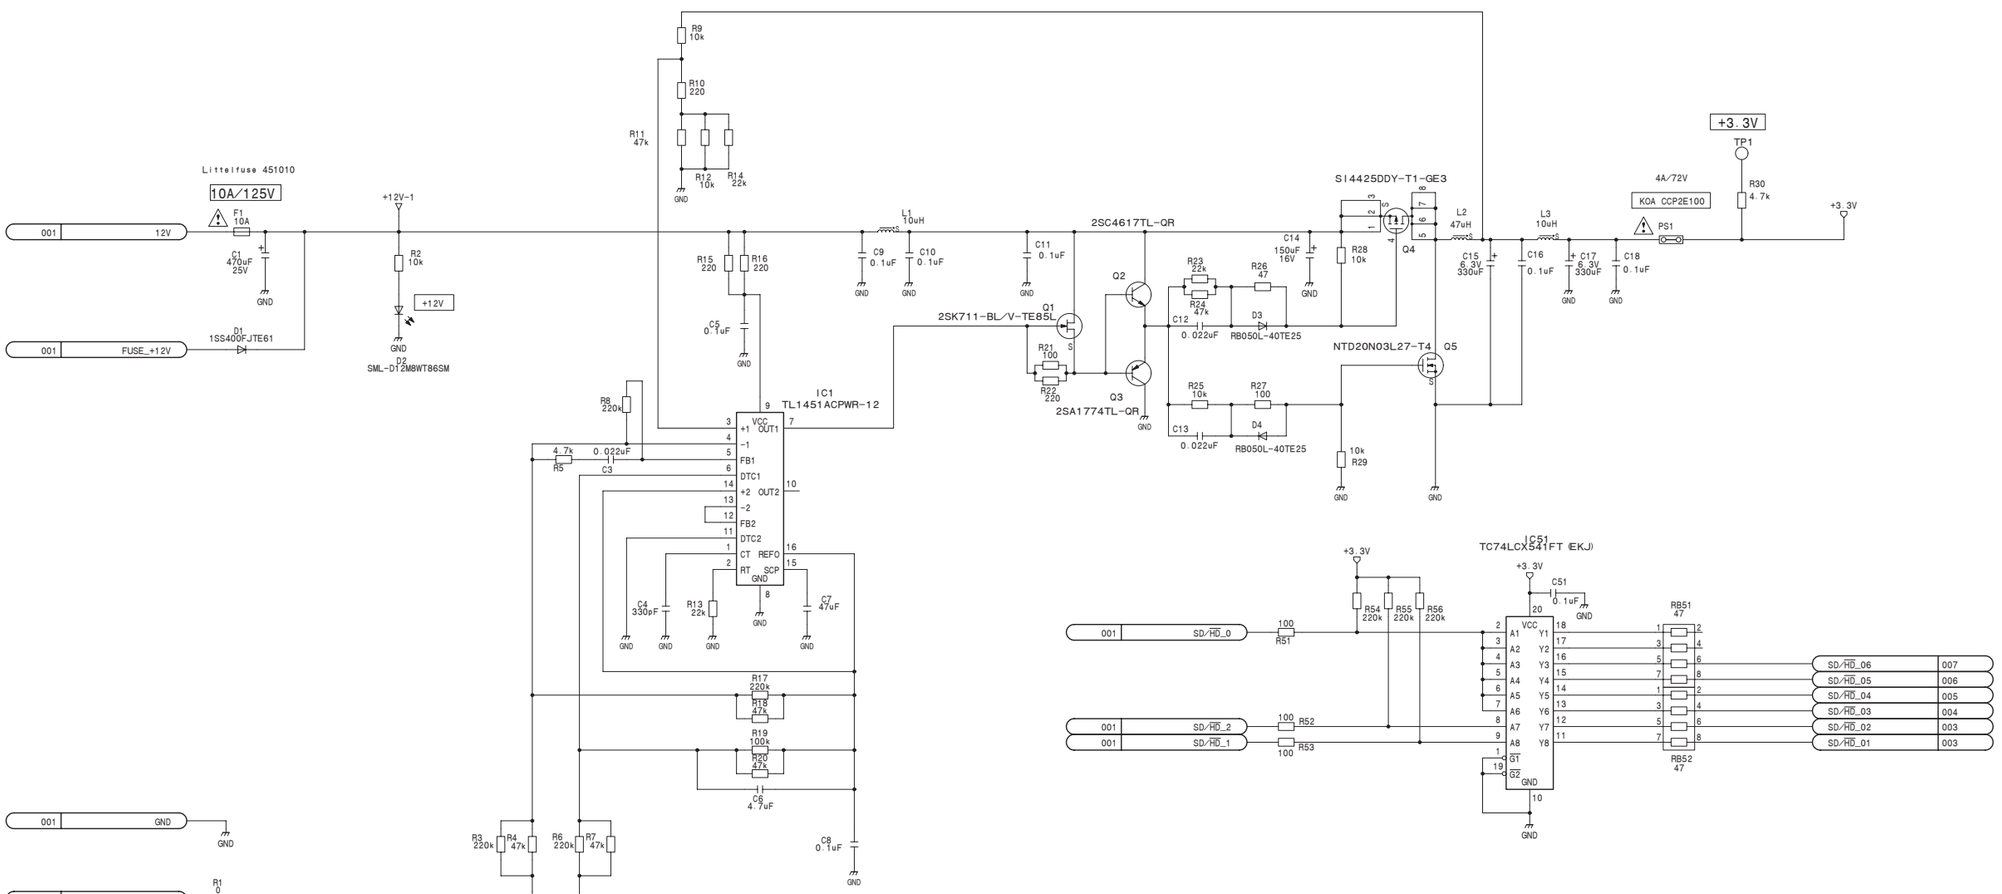

CNO-38B (2/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38B_003_2

CNO-38B (3/7)

SUFFIX: -12

CNO-38B (3/7)

SUFFIX: -12

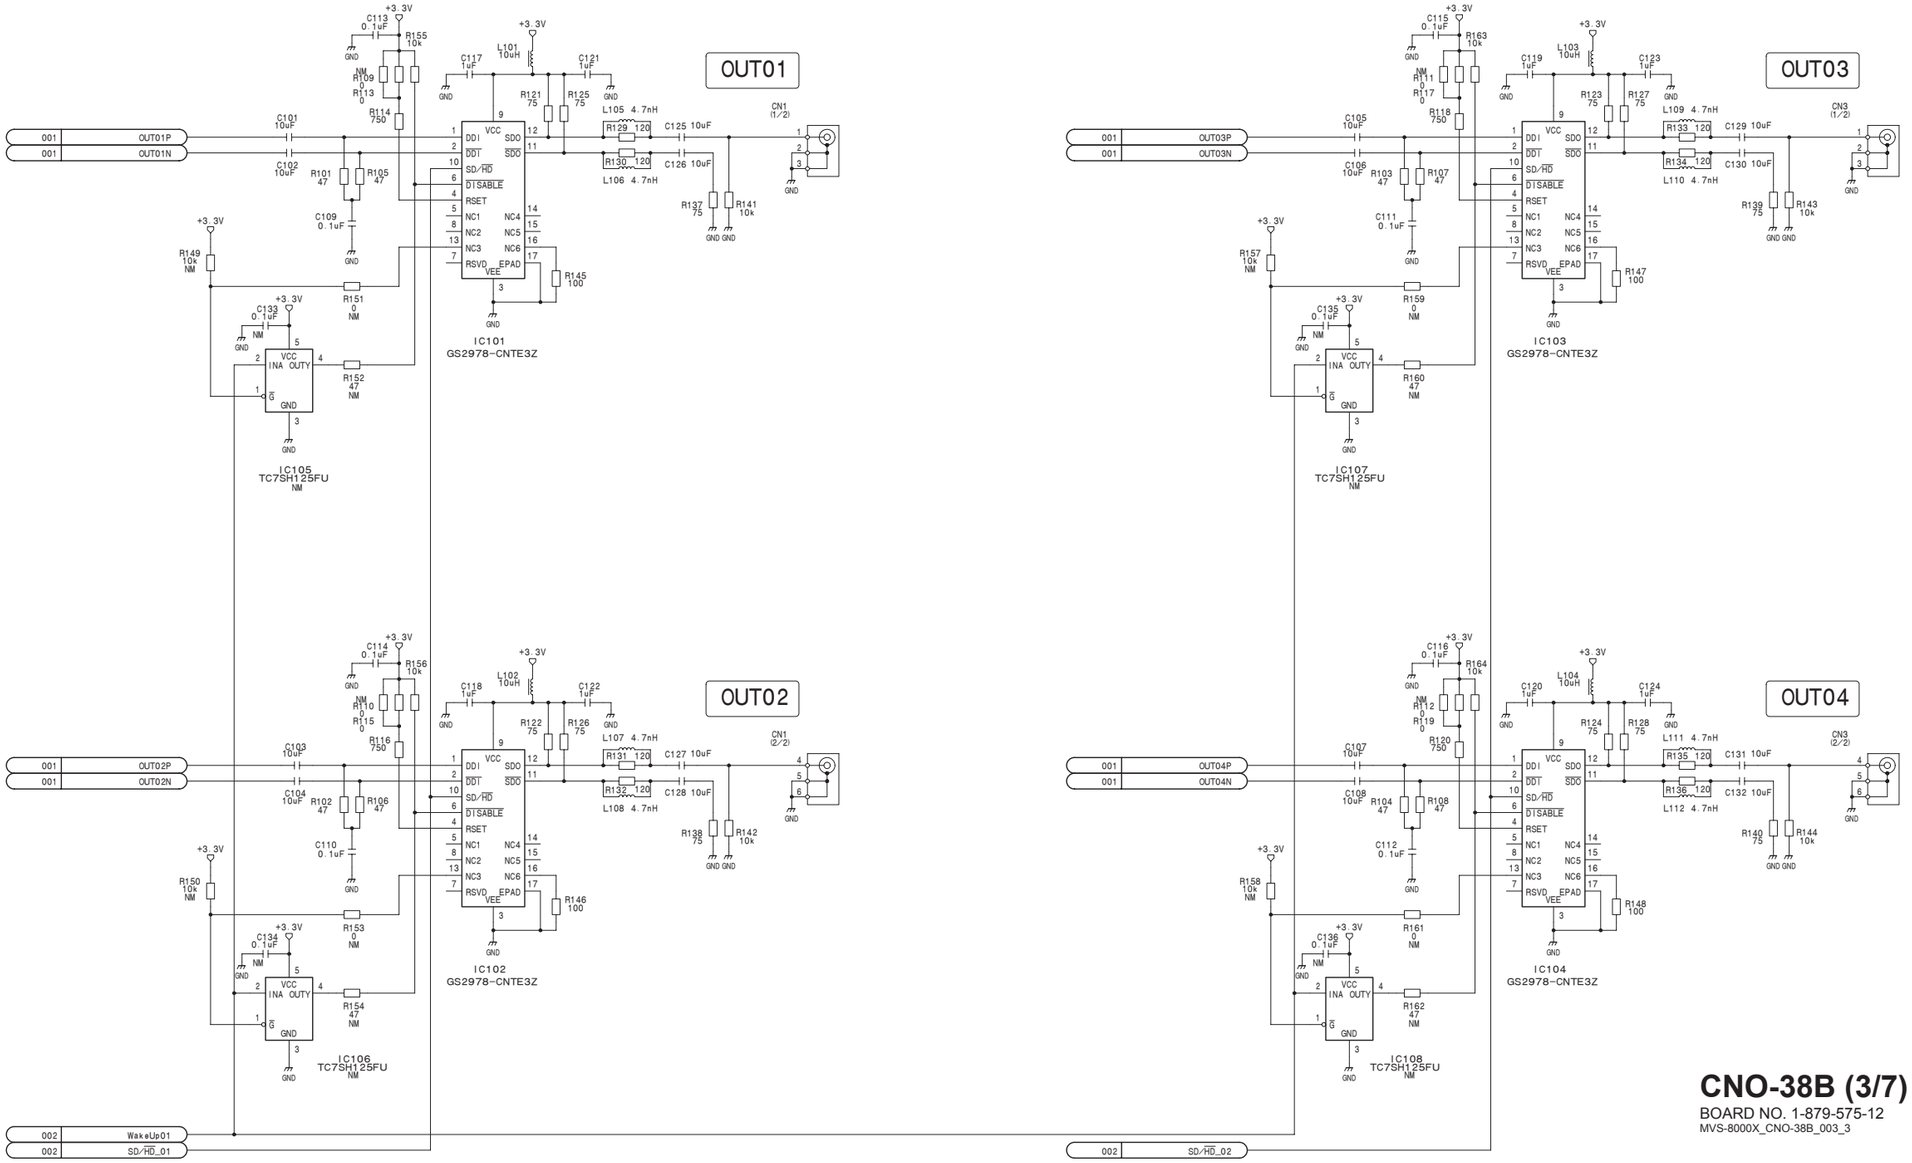

CNO-38B (3/7)

BOARD NO. 1-879-575-12

MVS-8000X_CNO-38B_003_3

CNO-38B (4/7) **SUFFIX: -12**

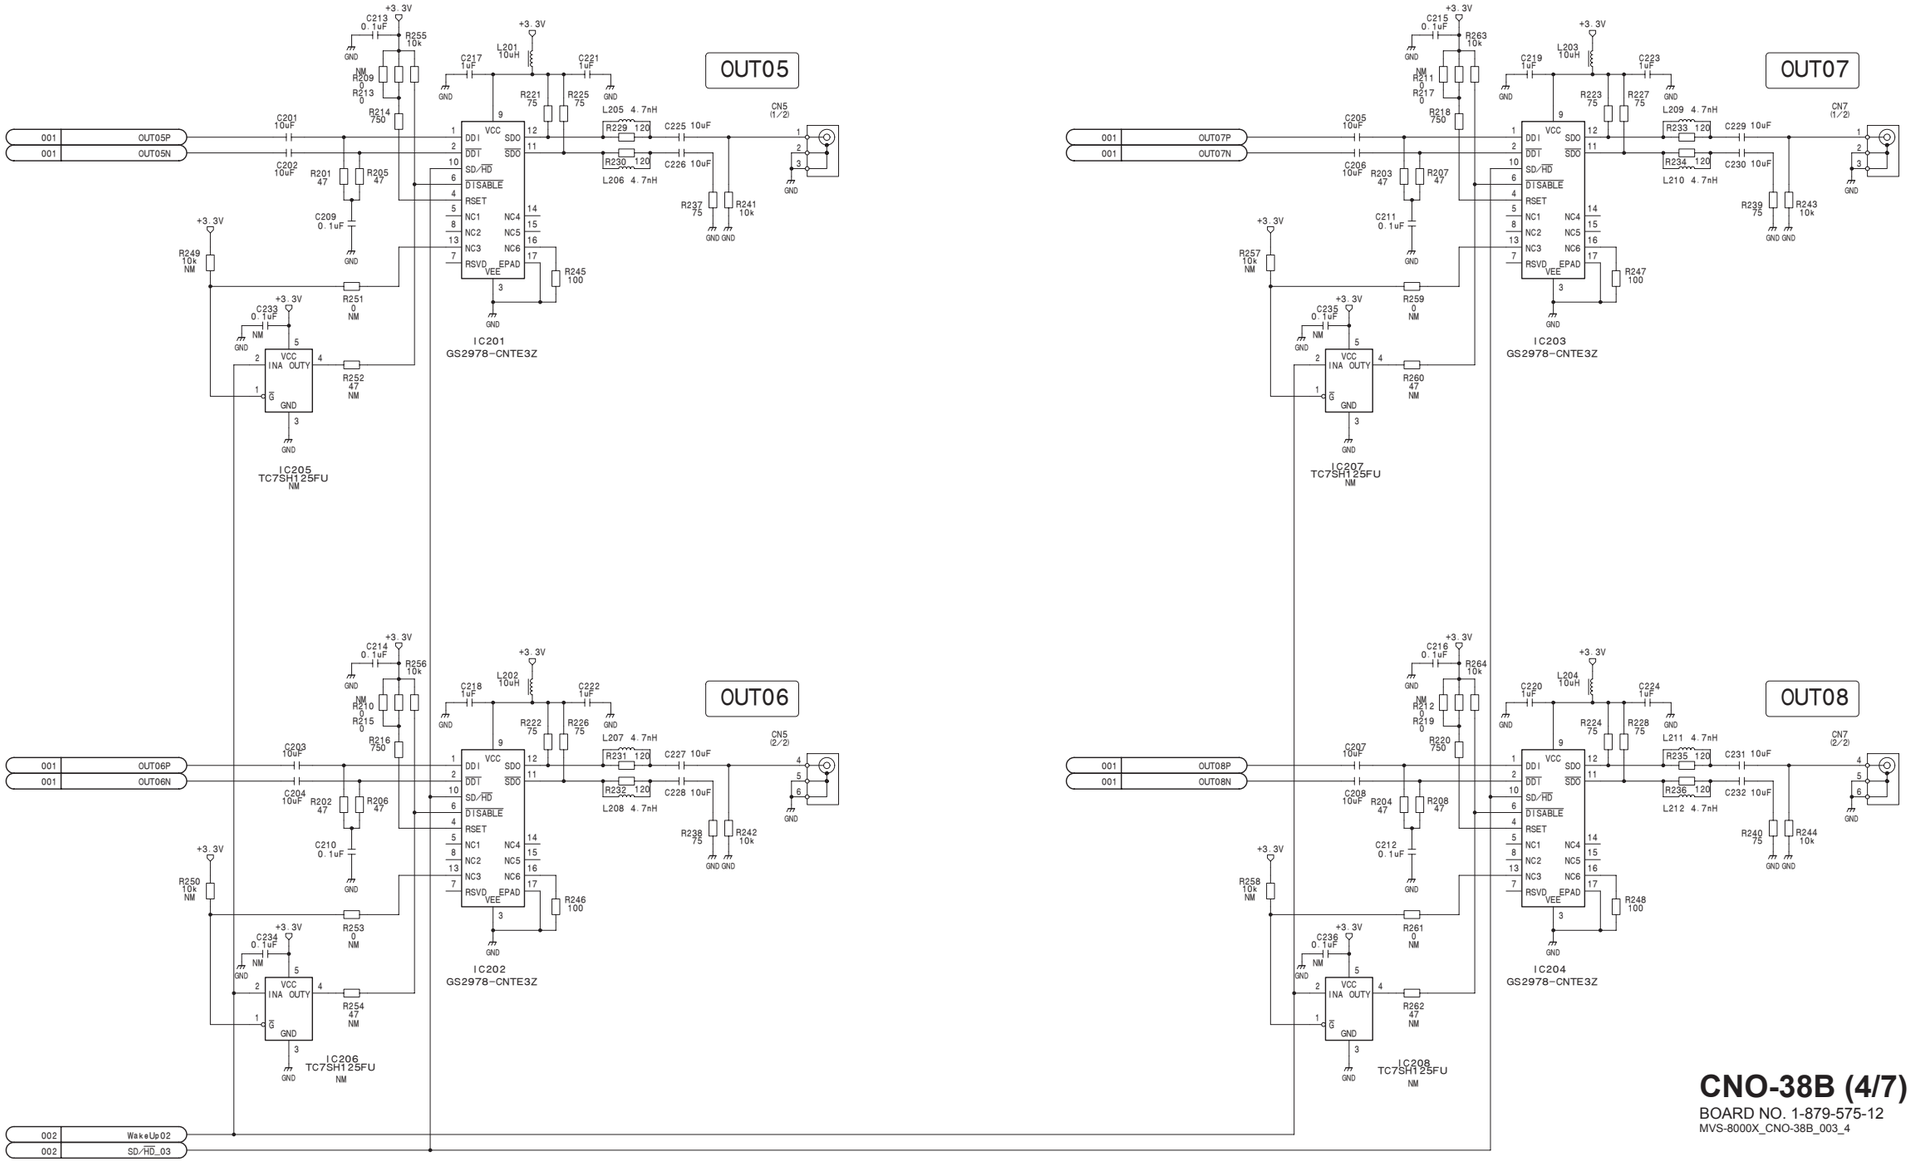

CNO-38B (4/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38B_003_4

CNO-38B (5/7)

SUFFIX: -12

CNO-38B (5/7)
SUFFIX: -12

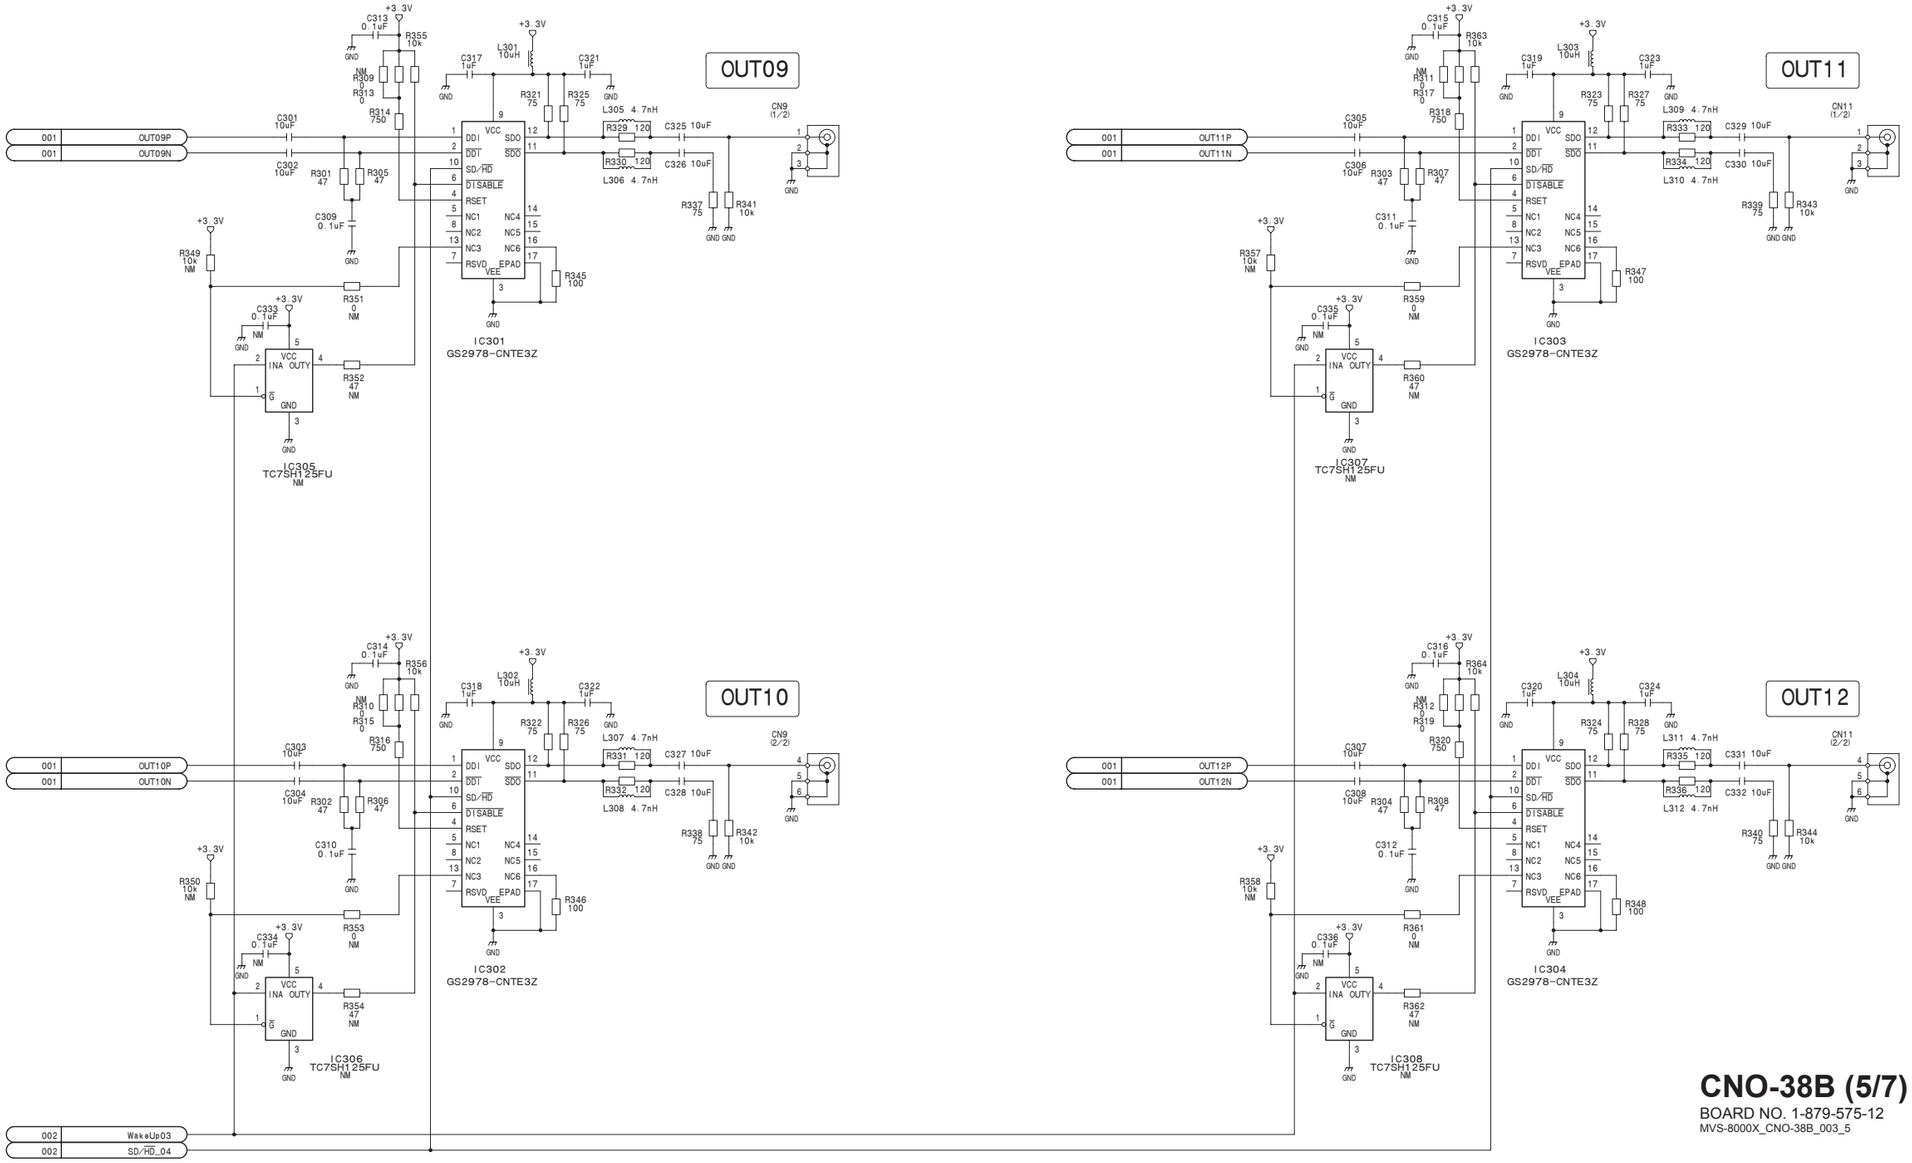

CNO-38B (5/7)

BOARD NO. 1-879-575-12

MVS-8000X_CNO-38B_003_5

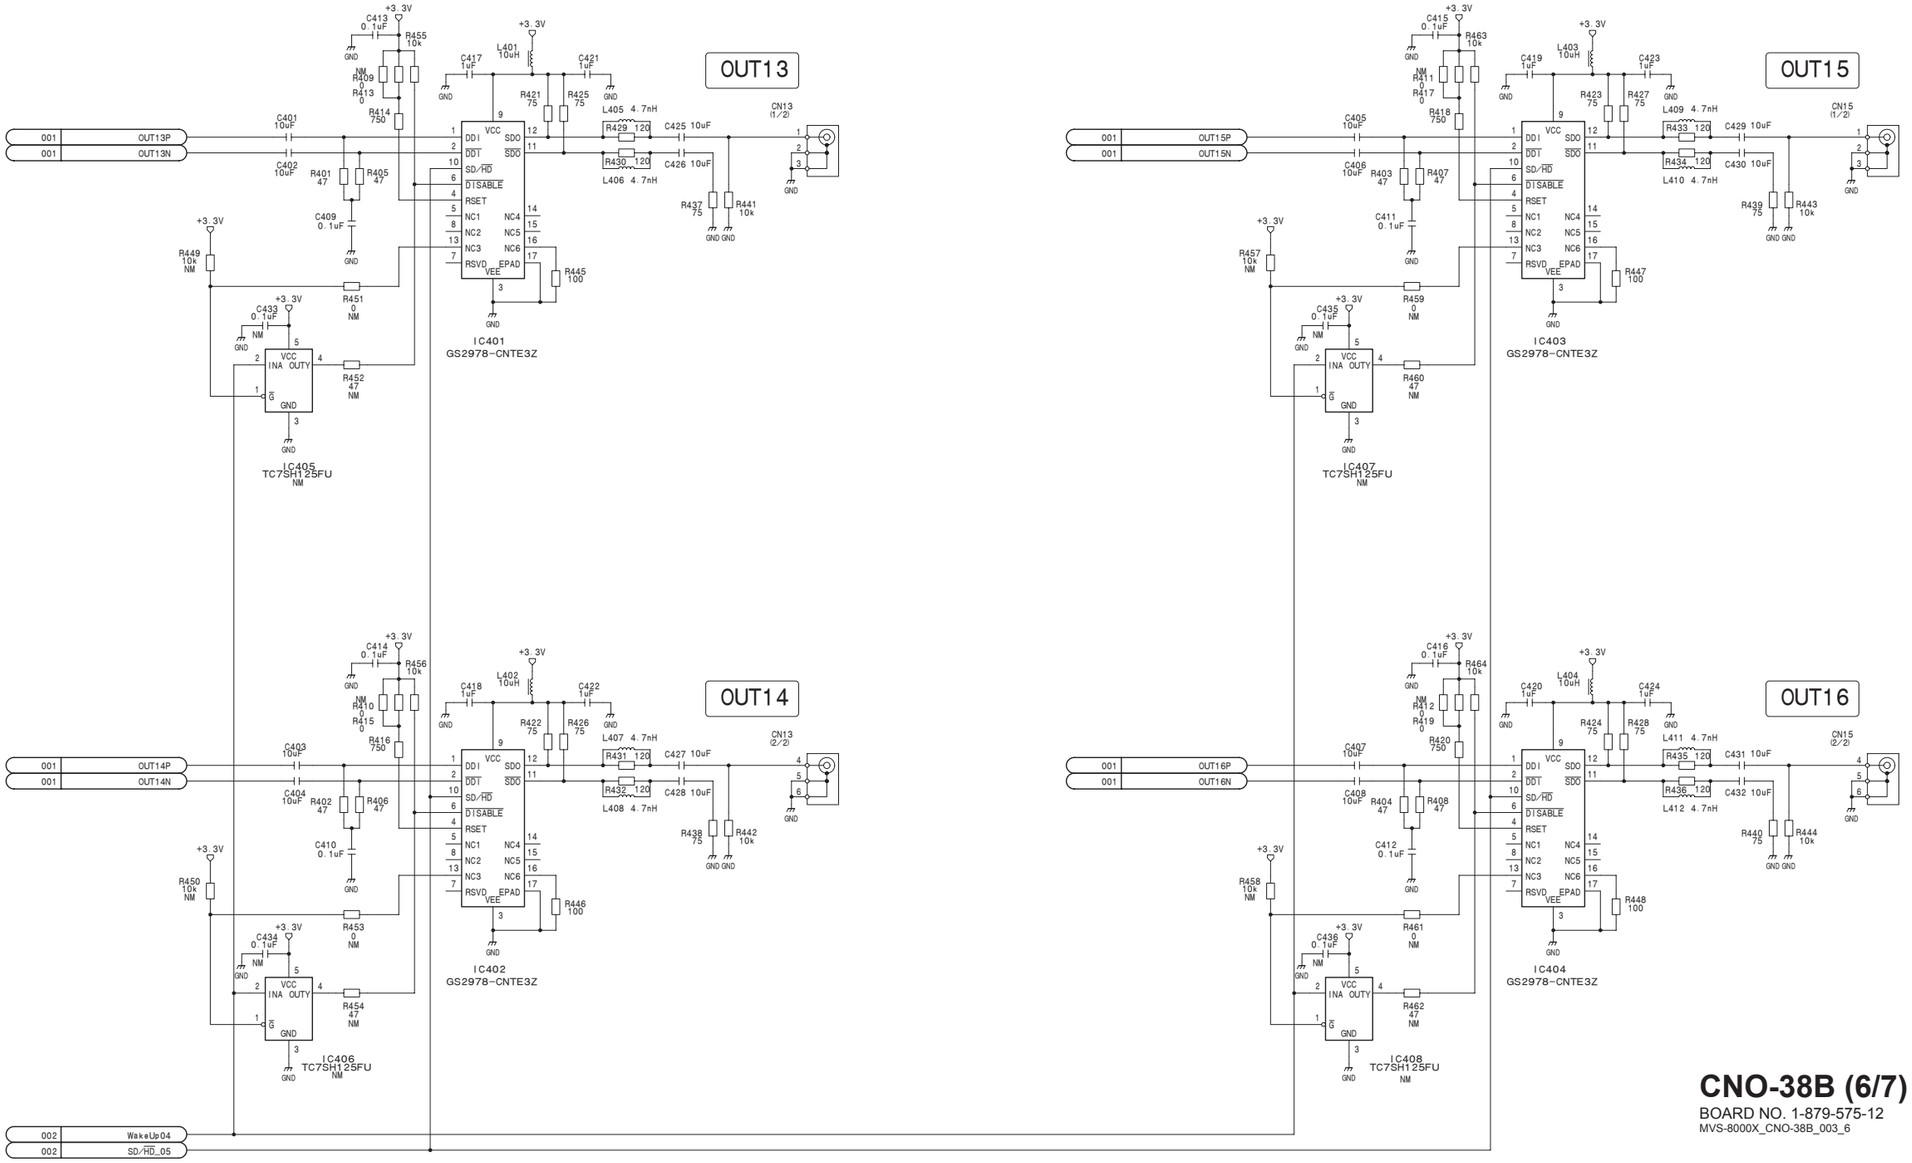

CNO-38B (6/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38B_003_6

CNO-38B (7/7)
SUFFIX: -12

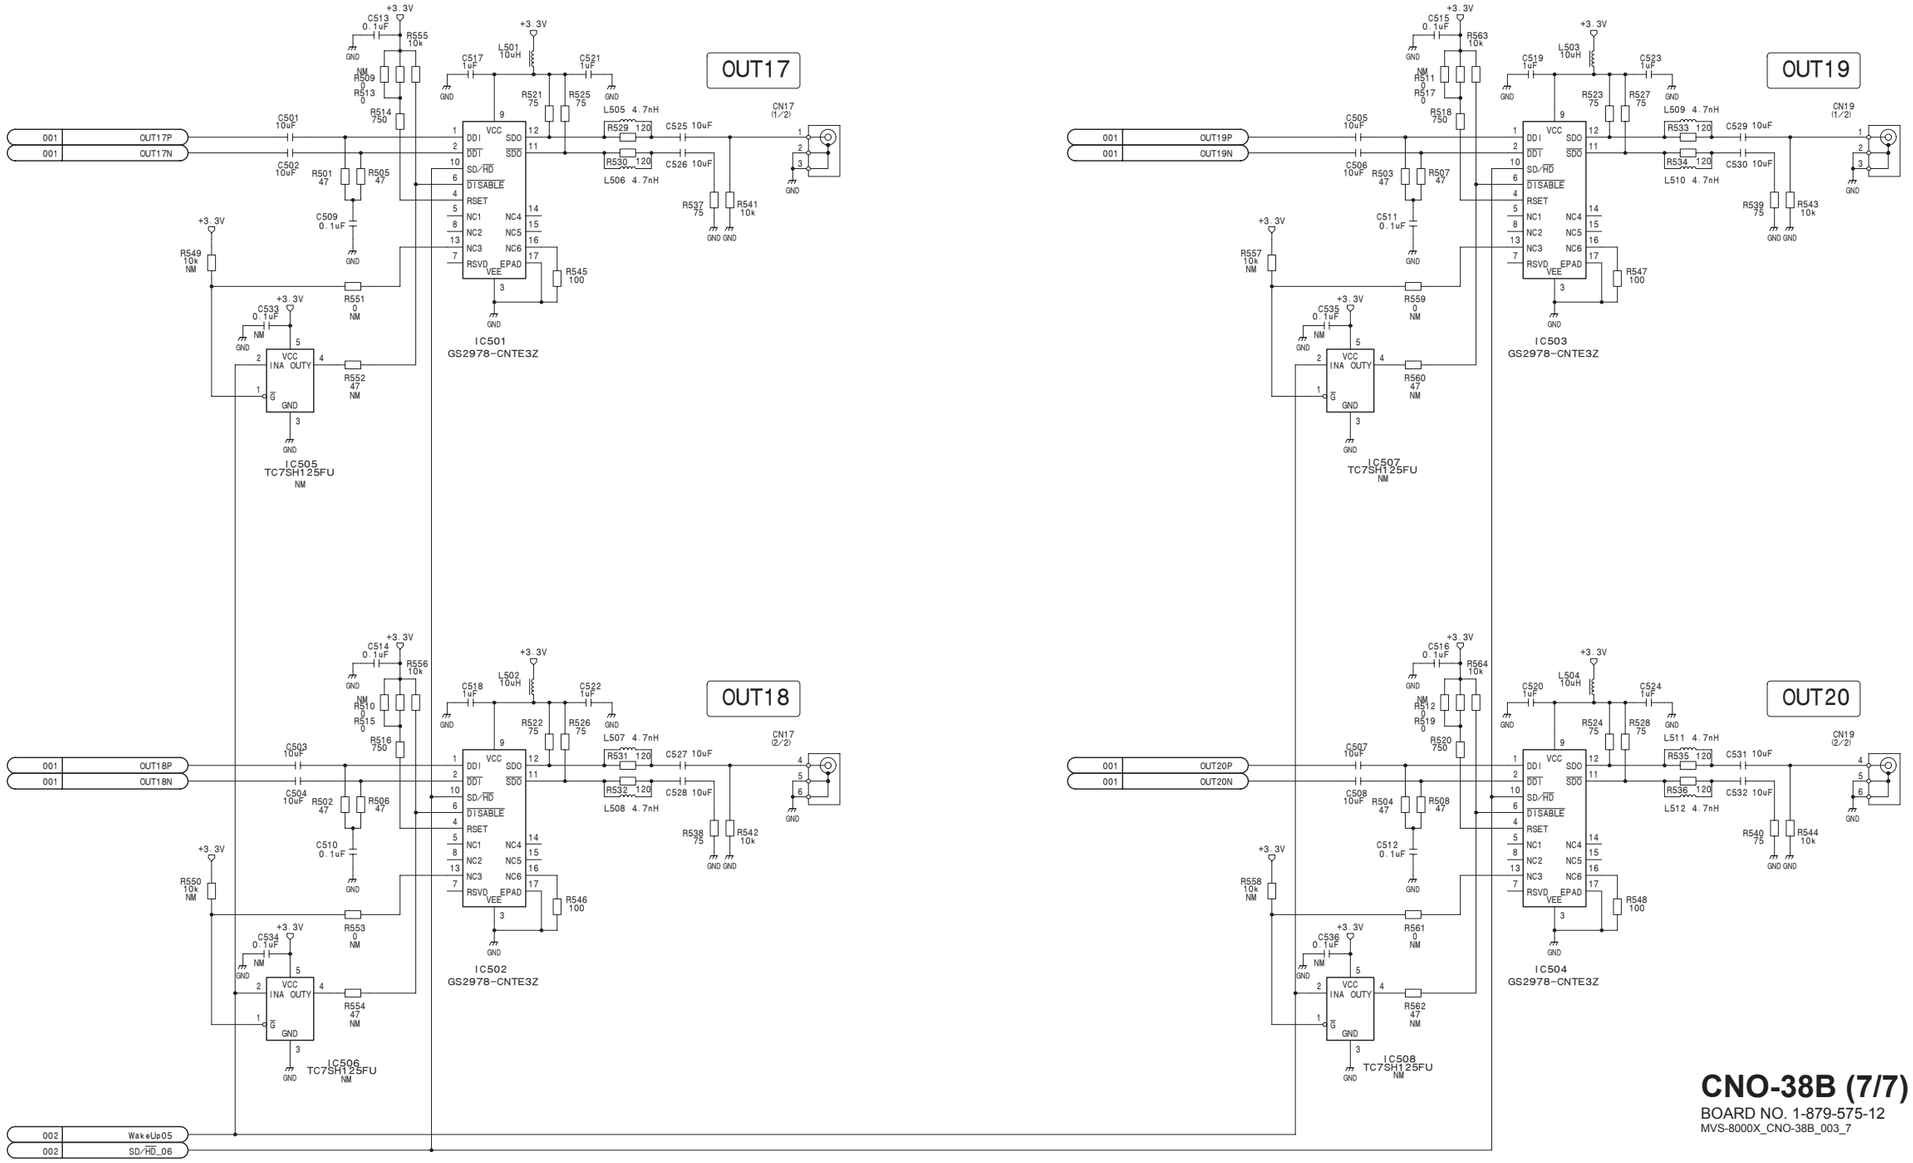

CNO-38B (7/7)
BOARD NO. 1-879-575-12
MVS-8000X_CNO-38B_003_7

CN1

	A	B	C	D
1	SENSE5		PWM	
2	SENSE3	SENSE2	SENSE4	SENSE1
3				
4	GND	GND	GND	GND
5				
6	12V	12V	12V	12V

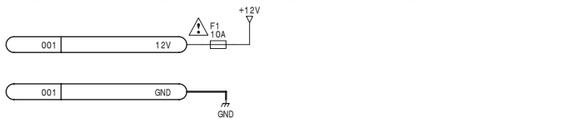

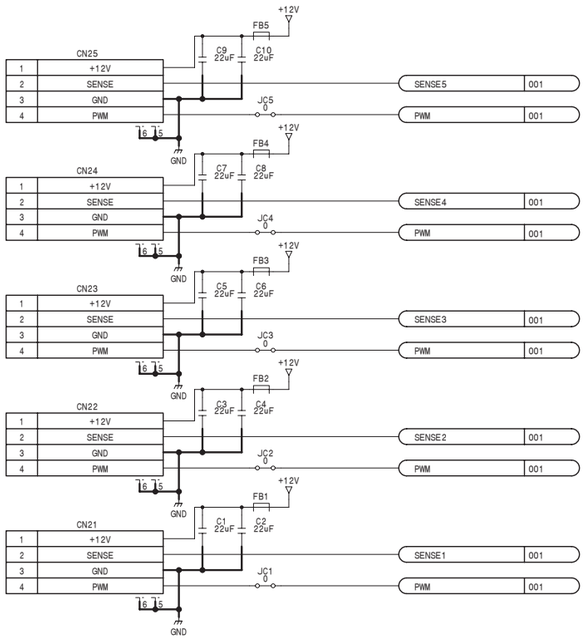

HN-364
BOARD NO. 1-880-116-11
MVS-8000X_HN-364_001_1

CN1

	A	B	C	D
1	SENSE5		PWM	
2	SENSE3	SENSE2	SENSE4	SENSE1
3				
4	GND	GND	GND	GND
5				
6	12V	12V	12V	12V

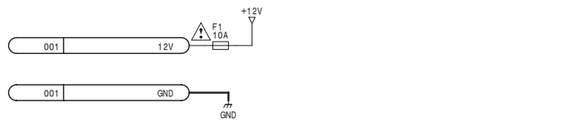

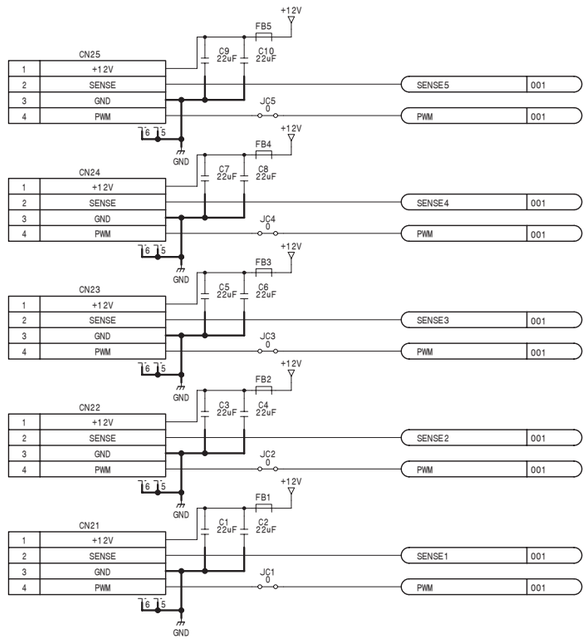

HN-364
BOARD NO. 1-880-116-12
MVS-8000X_HN-364_002_1

HN-365
SUFFIX: -11

CN1

1	12V
2	12V
3	12V
4	12V
5	SENSE3
6	SENSE2
7	SENSE1
8	SENSE4
9	SENSE5
10	GND
11	GND
12	GND
13	GND
14	PWM



CN2

	A	B	C	D
1	SENSE5		PWM	
2	SENSE3	SENSE2	SENSE4	SENSE1
3				
4	GND	GND	GND	GND
5				
6	12V	12V	12V	12V

HN-365

BOARD NO. 1-880-117-11
MVS-8000X_HN-365_001_1

4-149

CN1

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	SENSE1	SENSE2	SENSE3	SENSE4
6	SENSE5		PWM	

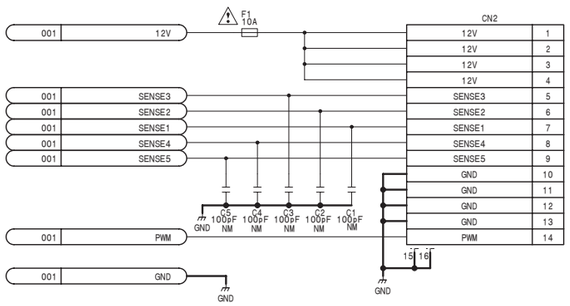

HN-366

BOARD NO. 1-880-118-11

MVS-8000X_HN-366_001_1

Front MIX-53

CNA101

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET3	DC_ENBL1	GND	GND (※X for CN1)	FUSE+12V	GND
6	BD_EXT_OF	BD_EXT_OR	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
7	(SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNB101

	A	B	BG	C	D	DG
1	VCLK1P	VCLK1N	GND			GND
2	FD12P	FD12N	GND	VD12P	VD12N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET3_TRX0P	INET3_TRX0N	GND	INET3_TRX1P	INET3_TRX1N	GND
7	INET3_TRX2P	INET3_TRX2N	GND	INET3_TRX3P	INET3_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE101

	A	B	BG	C	D	DG
1	(KEY6_SRCBP)	(KEY6_SRCBN)	GND	(KEY2_SRCBP)	(KEY2_SRCBN)	GND
2	ME5_KEY6_SRCAP	ME5_KEY6_SRCAN	GND	ME5_KEY2_SRCAP	ME5_KEY2_SRCAN	GND
3	(KEY6_FILBP)	(KEY6_FILBN)	GND	(KEY2_FILBP)	(KEY2_FILBN)	GND
4	ME5_OUT8P	ME5_OUT8N	GND	ME5_KEY2_FILAP	ME5_KEY2_FILAN	GND
5	ME5_OUT7P	ME5_OUT7N	GND	ME5_KEY6_FILAP	ME5_KEY6_FILAN	GND
6	ME5_OUT6P	ME5_OUT6N	GND	(KEY5_SRCBP)	(KEY5_SRCBN)	GND
7	ME5_OUT5P	ME5_OUT5N	GND	(KEY1_SRCBP)	(KEY1_SRCBN)	GND
8	ME5_KEY5_SRCAP	ME5_KEY5_SRCAN	GND	ME5_KEY1_SRCAP	ME5_KEY1_SRCAN	GND
9	(KEY5_FILBP)	(KEY5_FILBN)	GND	(KEY1_FILBP)	(KEY1_FILBN)	GND
10	ME5_KEY5_FILAP	ME5_KEY5_FILAN	GND	ME5_KEY1_FILAP	ME5_KEY1_FILAN	GND

CNG101

	A	B	BG	C	D	DG
1			GND	ME5_EXT_DMEBP	ME5_EXT_DMEBN	GND
2			GND	ME5_EXT_DMEAP	ME5_EXT_DMEAN	GND
3	(BGCLP)	(BGCLN)	GND			GND
4			GND	ME5_UTIL3BP	ME5_UTIL3BN	GND
5			GND	ME5_UTIL3AP	ME5_UTIL3AN	GND
6			GND	ME5_UTIL2BP	ME5_UTIL2BN	GND
7			GND	ME5_UTIL2AP	ME5_UTIL2AN	GND
8	ME5_PROCKP	ME5_PROCKN	GND			GND
9			GND	ME5_UTIL1BP	ME5_UTIL1BN	GND
10	ME5_PROCVP	ME5_PROCVN	GND	ME5_UTIL1AP	ME5_UTIL1AN	GND

CNJ101

	A	B	BG	C	D	DG
1	(SEND4KP)	(SEND4KN)	GND	(MVE4KP)	(MVE4KN)	GND
2	ME5_SEND2KP	ME5_SEND2KN	GND	ME5_MVE2KP	ME5_MVE2KN	GND
3			GND			GND
4	(SEND4VP)	(SEND4VN)	GND	(MVE4VP)	(MVE4VN)	GND
5	ME5_SEND2VP	ME5_SEND2VN	GND	ME5_MVE2VP	ME5_MVE2VN	GND
6	(SEND3KP)	(SEND3KN)	GND	(MVE3KP)	(MVE3KN)	GND
7	ME5_SEND1KP	ME5_SEND1KN	GND	ME5_MVE1KP	ME5_MVE1KN	GND
8			GND			GND
9	(SEND3VP)	(SEND3VN)	GND	(MVE3VP)	(MVE3VN)	GND
10	ME5_SEND1VP	ME5_SEND1VN	GND	ME5_MVE1VP	ME5_MVE1VN	GND

CNL101

	A	B	BG	C	D	DG
1	ME5_EXT_OUT4P	ME5_EXT_OUT4N	GND	ME5_DMEKBP	ME5_DMEKBN	GND
2			GND	ME5_DMEKAP	ME5_DMEKAN	GND
3	ME5_EXT_OUT3P	ME5_EXT_OUT3N	GND			GND
4			GND	ME5_DMEVBP	ME5_DMEVBN	GND
5			GND	ME5_DMEVAP	ME5_DMEVAN	GND
6			GND	ME5_BKGDBBP	ME5_BKGDBBN	GND
7			GND	ME5_BKGDBAP	ME5_BKGDBAN	GND
8	ME5_EXT_OUT2P	ME5_EXT_OUT2N	GND			GND
9			GND	ME5_BKGDABP	ME5_BKGDABN	GND
10	ME5_EXT_OUT1P	ME5_EXT_OUT1N	GND	ME5_BKGDAAP	ME5_BKGDAAN	GND

CNP101

	A	B	BG	C	D	DG
1	(KEY8_SRCBP)	(KEY8_SRCBN)	GND	(KEY4_SRCBP)	(KEY4_SRCBN)	GND
2	ME5_KEY8_SRCAP	ME5_KEY8_SRCAN	GND	ME5_KEY4_SRCAP	ME5_KEY4_SRCAN	GND
3	(KEY8_FILBP)	(KEY8_FILBN)	GND	(KEY4_FILBP)	(KEY4_FILBN)	GND
4	ME5_OUT4P	ME5_OUT4N	GND	ME5_KEY4_FILAP	ME5_KEY4_FILAN	GND
5	ME5_OUT3P	ME5_OUT3N	GND	ME5_KEY8_FILAP	ME5_KEY8_FILAN	GND
6	ME5_OUT2P	ME5_OUT2N	GND	(KEY7_SRCBP)	(KEY7_SRCBN)	GND
7	ME5_OUT1P	ME5_OUT1N	GND	(KEY3_SRCBP)	(KEY3_SRCBN)	GND
8	ME5_KEY7_SRCAP	ME5_KEY7_SRCAN	GND	ME5_KEY3_SRCAP	ME5_KEY3_SRCAN	GND
9	KEY7_FILBP)	KEY7_FILBN)	GND	(KEY3_FILBP)	(KEY3_FILBN)	GND
10	ME5_KEY7_FILAP	ME5_KEY7_FILAN	GND	ME5_KEY3_FILAP	ME5_KEY3_FILAN	GND

Rear CNI-37

CNA201

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_OF	BD_EXT_OR	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
6	RESET3	DC_ENBL1	GND	GND (※X for CN1)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF201

	A	B	BG	C	D	DG
1			GND	DME_IN11P	DME_IN11N	GND
2			GND	DME_IN12P	DME_IN12N	GND
3			GND	DME_IN13P	DME_IN13N	GND
4			GND	DME_IN14P	DME_IN14N	GND
5			GND	DME_IN15P	DME_IN15N	GND
6			GND	DME_IN16P	DME_IN16N	GND
7			GND	DME_IN17P	DME_IN17N	GND
8			GND	DME_IN18P	DME_IN18N	GND
9			GND	DME_IN19P	DME_IN19N	GND
10			GND	DME_IN20P	DME_IN20N	GND

CNN201

	A	B	BG	C	D	DG
1			GND	DME_IN01P	DME_IN01N	GND
2			GND	DME_IN02P	DME_IN02N	GND
3			GND	DME_IN03P	DME_IN03N	GND
4			GND	DME_IN04P	DME_IN04N	GND
5			GND	DME_IN05P	DME_IN05N	GND
6			GND	DME_IN06P	DME_IN06N	GND
7			GND	DME_IN07P	DME_IN07N	GND
8			GND	DME_IN08P	DME_IN08N	GND
9			GND	DME_IN09P	DME_IN09N	GND
10			GND	DME_IN10P	DME_IN10N	GND

MB-1150 (1/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_1

MB-1150 (2/20)
SUFFIX: -11

Front MIX-53

CNA102

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET3	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
6	BD_EXT_1F	BD_EXT_1R	GND	SD/HD0	SD/HD0	GND
7	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNB102

	A	B	BG	C	D	DG
1	VCLK11P	VCLK11N	GND			GND
2	FD11P	FD11N	GND	VD11P	VD11N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET6_TRX0P	INET6_TRX0N	GND	INET6_TRX1P	INET6_TRX1N	GND
7	INET6_TRX2P	INET6_TRX2N	GND	INET6_TRX3P	INET6_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE102

	A	B	BG	C	D	DG
1	ME4_KEY6_SRCBP	ME4_KEY6_SRCBN	GND	ME4_KEY2_SRCBP	ME4_KEY2_SRCBN	GND
2	ME4_KEY6_SRCAP	ME4_KEY6_SRCAN	GND	ME4_KEY2_SRCAP	ME4_KEY2_SRCAN	GND
3	ME4_KEY6_FILBP	ME4_KEY6_FILBN	GND	ME4_KEY2_FILBP	ME4_KEY2_FILBN	GND
4	ME4_OUT8P	ME4_OUT8N	GND	ME4_KEY2_FILAP	ME4_KEY2_FILAN	GND
5	ME4_OUT7P	ME4_OUT7N	GND	ME4_KEY6_FILAP	ME4_KEY6_FILAN	GND
6	ME4_OUT6P	ME4_OUT6N	GND	ME4_KEY5_SRCBP	ME4_KEY5_SRCBN	GND
7	ME4_OUT5P	ME4_OUT5N	GND	ME4_KEY1_SRCBP	ME4_KEY1_SRCBN	GND
8	ME4_KEY5_SRCAP	ME4_KEY5_SRCAN	GND	ME4_KEY1_SRCAP	ME4_KEY1_SRCAN	GND
9	ME4_KEY5_FILBP	ME4_KEY5_FILBN	GND	ME4_KEY1_FILBP	ME4_KEY1_FILBN	GND
10	ME4_KEY5_FILAP	ME4_KEY5_FILAN	GND	ME4_KEY1_FILAP	ME4_KEY1_FILAN	GND

CNG102

	A	B	BG	C	D	DG
1			GND	ME4_EXT_DMEBP	ME4_EXT_DMEBN	GND
2			GND	ME4_EXT_DMEAP	ME4_EXT_DMEAN	GND
3	IBGCLP	IBGCLN	GND			GND
4			GND	ME4_UTIL3BP	ME4_UTIL3BN	GND
5			GND	ME4_UTIL3AP	ME4_UTIL3AN	GND
6			GND	ME4_UTIL2BP	ME4_UTIL2BN	GND
7			GND	ME4_UTIL2AP	ME4_UTIL2AN	GND
8	ME4_PROCKP	ME4_PROCKN	GND			GND
9			GND	ME4_UTIL1BP	ME4_UTIL1BN	GND
10	ME4_PROCVP	ME4_PROCVN	GND	ME4_UTIL1AP	ME4_UTIL1AN	GND

CNJ102

	A	B	BG	C	D	DG
1	ME4_SEND4KP	ME4_SEND4KN	GND	ME4_MVE4KP	ME4_MVE4KN	GND
2	ME4_SEND2KP	ME4_SEND2KN	GND	ME4_MVE2KP	ME4_MVE2KN	GND
3			GND			GND
4	ME4_SEND4VP	ME4_SEND4VN	GND	ME4_MVE4VP	ME4_MVE4VN	GND
5	ME4_SEND2VP	ME4_SEND2VN	GND	ME4_MVE2VP	ME4_MVE2VN	GND
6	ME4_SEND3KP	ME4_SEND3KN	GND	ME4_MVE3KP	ME4_MVE3KN	GND
7	ME4_SEND1KP	ME4_SEND1KN	GND	ME4_MVE1KP	ME4_MVE1KN	GND
8			GND			GND
9	ME4_SEND3VP	ME4_SEND3VN	GND	ME4_MVE3VP	ME4_MVE3VN	GND
10	ME4_SEND1VP	ME4_SEND1VN	GND	ME4_MVE1VP	ME4_MVE1VN	GND

CNL102

	A	B	BG	C	D	DG
1	ME4_EXT_OUT4P	ME4_EXT_OUT4N	GND	ME4_DMEKBP	ME4_DMEKBN	GND
2			GND	ME4_DMEKAP	ME4_DMEKAN	GND
3	ME4_EXT_OUT3P	ME4_EXT_OUT3N	GND			GND
4			GND	ME4_DMEVBP	ME4_DMEVBN	GND
5			GND	ME4_DMEVAP	ME4_DMEVAN	GND
6			GND	ME4_BKGDBBP	ME4_BKGDBBN	GND
7			GND	ME4_BKGDBAP	ME4_BKGDBAN	GND
8	ME4_EXT_OUT2P	ME4_EXT_OUT2N	GND			GND
9			GND	ME4_BKGDABP	ME4_BKGDABN	GND
10	ME4_EXT_OUT1P	ME4_EXT_OUT1N	GND	ME4_BKGDAAP	ME4_BKGDAAN	GND

CNP102

	A	B	BG	C	D	DG
1	ME4_KEY8_SRCBP	ME4_KEY8_SRCBN	GND	ME4_KEY4_SRCBP	ME4_KEY4_SRCBN	GND
2	ME4_KEY8_SRCAP	ME4_KEY8_SRCAN	GND	ME4_KEY4_SRCAP	ME4_KEY4_SRCAN	GND
3	ME4_KEY8_FILBP	ME4_KEY8_FILBN	GND	ME4_KEY4_FILBP	ME4_KEY4_FILBN	GND
4	ME4_OUT4P	ME4_OUT4N	GND	ME4_KEY4_FILAP	ME4_KEY4_FILAN	GND
5	ME4_OUT3P	ME4_OUT3N	GND	ME4_KEY8_FILAP	ME4_KEY8_FILAN	GND
6	ME4_OUT2P	ME4_OUT2N	GND	ME4_KEY7_SRCBP	ME4_KEY7_SRCBN	GND
7	ME4_OUT1P	ME4_OUT1N	GND	ME4_KEY3_SRCBP	ME4_KEY3_SRCBN	GND
8	ME4_KEY7_SRCAP	ME4_KEY7_SRCAN	GND	ME4_KEY3_SRCAP	ME4_KEY3_SRCAN	GND
9	ME4_KEY7_FILBP	ME4_KEY7_FILBN	GND	ME4_KEY3_FILBP	ME4_KEY3_FILBN	GND
10	ME4_KEY7_FILAP	ME4_KEY7_FILAN	GND	ME4_KEY3_FILAP	ME4_KEY3_FILAN	GND

Rear CNO-37

CNA202

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_1F	BD_EXT_1R	GND	SD/HD0	SD/HD0	GND
6	RESET3	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF202

	A	B	BG	C	D	DG
1			GND	DME_OUT11P	DME_OUT11N	GND
2			GND	DME_OUT12P	DME_OUT12N	GND
3			GND	DME_OUT13P	DME_OUT13N	GND
4			GND	DME_OUT14P	DME_OUT14N	GND
5			GND	DME_OUT15P	DME_OUT15N	GND
6			GND	DME_OUT16P	DME_OUT16N	GND
7			GND	DME_OUT17P	DME_OUT17N	GND
8			GND	DME_OUT18P	DME_OUT18N	GND
9			GND	DME_OUT19P	DME_OUT19N	GND
10			GND	DME_OUT20P	DME_OUT20N	GND

CNN202

	A	B	BG	C	D	DG
1			GND	DME_OUT01P	DME_OUT01N	GND
2			GND	DME_OUT02P	DME_OUT02N	GND
3			GND	DME_OUT03P	DME_OUT03N	GND
4			GND	DME_OUT04P	DME_OUT04N	GND
5			GND	DME_OUT05P	DME_OUT05N	GND
6			GND	DME_OUT06P	DME_OUT06N	GND
7			GND	DME_OUT07P	DME_OUT07N	GND
8			GND	DME_OUT08P	DME_OUT08N	GND
9			GND	DME_OUT09P	DME_OUT09N	GND
10			GND	DME_OUT10P	DME_OUT10N	GND

MB-1150 (2/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_2

Front XPT-32

CNA103

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	GND (FOR CN1)	FUSE+12V	GND
6	BD_EXT_2F	BD_EXT_2R	GND	CN1_I2C_SCL		GND
7	(SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK0P	VCLK0N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
10	FD10P	FD10N	GND	VD10P	VD10N	GND

CNB103

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK4p	XPT_CLK4n	GND	XPT_CS4An	XPT_CS4Bn	GND
10	XPT_WE4n	XPT_WAIT4n	GND	XPT_OEn	XPT_RESET2n	GND

CNC103

	A	B	BG	C	D	DG
1	DME_UTIL1BP	DME_UTIL1BN	GND	DME_UTIL2BP	DME_UTIL2BN	GND
2	DME_UTIL1AP	DME_UTIL1AN	GND	DME_UTIL2AP	DME_UTIL2AN	GND
3	ME3_SEND4KP	ME3_SEND4KN	GND	ME5_SEND2KP	ME5_SEND2KN	GND
4	ME3_SEND2KP	ME3_SEND2KN	GND	ME5_SEND2VP	ME5_SEND2VN	GND
5	ME3_SEND4VP	ME3_SEND4VN	GND	ME5_SEND1KP	ME5_SEND1KN	GND
6	ME3_SEND2VP	ME3_SEND2VN	GND	ME5_SEND1VP	ME5_SEND1VN	GND
7	ME4_SEND4KP	ME4_SEND4KN	GND	ME4_SEND3KP	ME4_SEND3KN	GND
8	ME4_SEND2KP	ME4_SEND2KN	GND	ME4_SEND1KP	ME4_SEND1KN	GND
9	ME4_SEND4VP	ME4_SEND4VN	GND	ME4_SEND3VP	ME4_SEND3VN	GND
10	ME4_SEND2VP	ME4_SEND2VN	GND	ME4_SEND1VP	ME4_SEND1VN	GND

CNE103

	A	B	BG	C	D	DG
1	PRE_IN16AP	PRE_IN16AN	GND	DME_IN20P	DME_IN20N	GND
2	PRE_IN17AP	PRE_IN17AN	GND	DME_IN19P	DME_IN19N	GND
3	PRE_IN18AP	PRE_IN18AN	GND	DME_IN18P	DME_IN18N	GND
4	PRE_IN19AP	PRE_IN19AN	GND	DME_IN17P	DME_IN17N	GND
5	PRE_IN20AP	PRE_IN20AN	GND	DME_IN16P	DME_IN16N	GND
6	PRE_IN11AP	PRE_IN11AN	GND	DME_IN15P	DME_IN15N	GND
7	PRE_IN12AP	PRE_IN12AN	GND	DME_IN14P	DME_IN14N	GND
8	PRE_IN13AP	PRE_IN13AN	GND	DME_IN13P	DME_IN13N	GND
9	PRE_IN14AP	PRE_IN14AN	GND	DME_IN12P	DME_IN12N	GND
10	PRE_IN15AP	PRE_IN15AN	GND	DME_IN11P	DME_IN11N	GND

CNG103

	A	B	BG	C	D	DG
1	DME_MON8P	DME_MON8N	GND	ME1_MVE4KP	ME1_MVE4KN	GND
2	DME_MON7P	DME_MON7N	GND	ME1_MVE2KP	ME1_MVE2KN	GND
3	DME_MON6P	DME_MON6N	GND	ME1_MVE4VP	ME1_MVE4VN	GND
4	DME_MON5P	DME_MON5N	GND	ME1_MVE2VP	ME1_MVE2VN	GND
5	DME_MON4P	DME_MON4N	GND	ME2_MVE4KP	ME2_MVE4KN	GND
6	DME_MON3P	DME_MON3N	GND	ME2_MVE2KP	ME2_MVE2KN	GND
7	DME_MON2P	DME_MON2N	GND	ME2_MVE4VP	ME2_MVE4VN	GND
8	DME_MON1P	DME_MON1N	GND	ME2_MVE2VP	ME2_MVE2VN	GND
9	ME3_MVE4KP	ME3_MVE4KN	GND	ME5_KEY2_SRCAP	ME5_KEY2_SRCAN	GND
10	ME3_MVE2KP	ME3_MVE2KN	GND	ME5_KEY2_FILAP	ME5_KEY2_FILAN	GND

CNJ103

	A	B	BG	C	D	DG
1	ME5_KEY1_SRCAP	ME5_KEY1_SRCAN	GND	DME_OUT20P	DME_OUT20N	GND
2	ME5_KEY1_FILAP	ME5_KEY1_FILAN	GND	DME_OUT19P	DME_OUT19N	GND
3	ME4_MVE4VP	ME4_MVE4VN	GND	DME_OUT18P	DME_OUT18N	GND
4	ME4_MVE2VP	ME4_MVE2VN	GND	DME_OUT17P	DME_OUT17N	GND
5	ME4_MVE3KP	ME4_MVE3KN	GND	DME_OUT16P	DME_OUT16N	GND
6	ME4_MVE1KP	ME4_MVE1KN	GND	DME_OUT15P	DME_OUT15N	GND
7	ME5_KEY6_SRCAP	ME5_KEY6_SRCAN	GND	DME_OUT14P	DME_OUT14N	GND
8	ME5_KEY6_FILAP	ME5_KEY6_FILAN	GND	DME_OUT13P	DME_OUT13N	GND
9	ME5_KEY5_SRCAP	ME5_KEY5_SRCAN	GND	DME_OUT12P	DME_OUT12N	GND
10	ME5_KEY5_FILAP	ME5_KEY5_FILAN	GND	DME_OUT11P	DME_OUT11N	GND

CNK103

	A	B	BG	C	D	DG
1	ME3_SEND3VP	ME3_SEND3VN	GND	ME3_SEND3KP	ME3_SEND3KN	GND
2	ME3_SEND1VP	ME3_SEND1VN	GND	ME3_SEND1KP	ME3_SEND1KN	GND
3	ME1_SEND4KP	ME1_SEND4KN	GND	ME2_SEND4KP	ME2_SEND4KN	GND
4	ME1_SEND2KP	ME1_SEND2KN	GND	ME2_SEND2KP	ME2_SEND2KN	GND
5	ME1_SEND4VP	ME1_SEND4VN	GND	ME2_SEND4VP	ME2_SEND4VN	GND
6	ME1_SEND2VP	ME1_SEND2VN	GND	ME2_SEND2VP	ME2_SEND2VN	GND
7	ME1_SEND3KP	ME1_SEND3KN	GND	ME2_SEND3KP	ME2_SEND3KN	GND
8	ME1_SEND1KP	ME1_SEND1KN	GND	ME2_SEND1KP	ME2_SEND1KN	GND
9	ME1_SEND3VP	ME1_SEND3VN	GND	ME2_SEND3VP	ME2_SEND3VN	GND
10	ME1_SEND1VP	ME1_SEND1VN	GND	ME2_SEND1VP	ME2_SEND1VN	GND

CNL103

	A	B	BG	C	D	DG
1	PRE_IN06AP	PRE_IN06AN	GND	DME_IN10P	DME_IN10N	GND
2	PRE_IN07AP	PRE_IN07AN	GND	DME_IN09P	DME_IN09N	GND
3	PRE_IN08AP	PRE_IN08AN	GND	DME_IN08P	DME_IN08N	GND
4	PRE_IN09AP	PRE_IN09AN	GND	DME_IN07P	DME_IN07N	GND
5	PRE_IN10AP	PRE_IN10AN	GND	DME_IN06P	DME_IN06N	GND
6	PRE_IN01AP	PRE_IN01AN	GND	DME_IN05P	DME_IN05N	GND
7	PRE_IN02AP	PRE_IN02AN	GND	DME_IN04P	DME_IN04N	GND
8	PRE_IN03AP	PRE_IN03AN	GND	DME_IN03P	DME_IN03N	GND
9	PRE_IN04AP	PRE_IN04AN	GND	DME_IN02P	DME_IN02N	GND
10	PRE_IN05AP	PRE_IN05AN	GND	DME_IN01P	DME_IN01N	GND

CNP103

	A	B	BG	C	D	DG
1	ME3_MVE3KP	ME3_MVE3KN	GND	DME_OUT10P	DME_OUT10N	GND
2	ME3_MVE1KP	ME3_MVE1KN	GND	DME_OUT09P	DME_OUT09N	GND
3	ME3_MVE3VP	ME3_MVE3VN	GND	DME_OUT08P	DME_OUT08N	GND
4	ME3_MVE1VP	ME3_MVE1VN	GND	DME_OUT07P	DME_OUT07N	GND
5	ME2_MVE3KP	ME2_MVE3KN	GND	DME_OUT06P	DME_OUT06N	GND
6	ME2_MVE1KP	ME2_MVE1KN	GND	DME_OUT05P	DME_OUT05N	GND
7	ME2_MVE3VP	ME2_MVE3VN	GND	DME_OUT04P	DME_OUT04N	GND
8	ME2_MVE1VP	ME2_MVE1VN	GND	DME_OUT03P	DME_OUT03N	GND
9	ME1_MVE3KP	ME1_MVE3KN	GND	DME_OUT02P	DME_OUT02N	GND
10	ME1_MVE1KP	ME1_MVE1KN	GND	DME_OUT01P	DME_OUT01N	GND

CNR103

	A	B	BG	C	D	DG
1	ME1_MVE3VP	ME1_MVE3VN	GND	ME4_MVE4KP	ME4_MVE4KN	GND
2	ME1_MVE1VP	ME1_MVE1VN	GND	ME4_MVE2KP	ME4_MVE2KN	GND
3	ME5_MVE2KP	ME5_MVE2KN	GND	ME4_MVE3VP	ME4_MVE3VN	GND
4	ME5_MVE2VP	ME5_MVE2VN	GND	ME4_MVE1VP	ME4_MVE1VN	GND
5	ME5_MVE1KP	ME5_MVE1KN	GND	ME3_MVE4VP	ME3_MVE4VN	GND
6	ME5_MVE1VP	ME5_MVE1VN	GND	ME3_MVE2VP	ME3_MVE2VN	GND
7	ME5_KEY8_SRCAP	ME5_KEY8_SRCAN	GND	ME5_KEY4_SRCAP	ME5_KEY4_SRCAN	GND
8	ME5_KEY8_FILAP	ME5_KEY8_FILAN	GND	ME5_KEY4_FILAP	ME5_KEY4_FILAN	GND
9	ME5_KEY7_SRCAP	ME5_KEY7_SRCAN	GND	ME5_KEY3_SRCAP	ME5_KEY3_SRCAN	GND
10	ME5_KEY7_FILAP	ME5_KEY7_FILAN	GND	ME5_KEY3_FILAP	ME5_KEY3_FILAN	GND

Rear CNI-37

CNA203

	A	B	BG	C	D	DG
1	FD10P	FD10N	GND	VD10P	VD10N	GND
2	VCLK0P	VCLK0N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_2F	BD_EXT_2R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
6	RESET0	DC_ENBL0	GND	GND (FOR CN1)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF203

	A	B	BG	C	D	DG
1	PRE_IN11BP	PRE_IN11BN	GND	PRE_IN11AP	PRE_IN11AN	GND
2	PRE_IN12BP	PRE_IN12BN	GND	PRE_IN12AP	PRE_IN12AN	GND
3	PRE_IN13BP	PRE_IN13BN	GND	PRE_IN13AP	PRE_IN13AN	GND
4	PRE_IN14BP	PRE_IN14BN	GND	PRE_IN14AP	PRE_IN14AN	GND
5	PRE_IN15BP	PRE_IN15BN	GND	PRE_IN15AP	PRE_IN15AN	GND
6	PRE_IN16BP	PRE_IN16BN	GND	PRE_IN16AP	PRE_IN16AN	GND
7	PRE_IN17BP	PRE_IN17BN	GND	PRE_IN17AP	PRE_IN17AN	GND
8	PRE_IN18BP	PRE_IN18BN	GND	PRE_IN18AP	PRE_IN18AN	GND
9	PRE_IN19BP	PRE_IN19BN	GND	PRE_IN19AP	PRE_IN19AN	GND
10	PRE_IN20BP	PRE_IN20BN	GND	PRE_IN20AP	PRE_IN20AN	GND

CNN203

	A	B	BG	C	D	DG
1	PRE_IN01BP	PRE_IN01BN	GND	PRE_IN01AP	PRE_IN01AN	GND
2	PRE_IN02BP	PRE_IN02BN	GND	PRE_IN02AP	PRE_IN02AN	GND
3	PRE_IN03BP	PRE_IN03BN	GND	PRE_IN03AP	PRE_IN03AN	GND
4	PRE_IN04BP	PRE_IN04BN	GND	PRE_IN04AP	PRE_IN04AN	GND
5	PRE_IN05BP	PRE_IN05BN	GND	PRE_IN05AP	PRE_IN05AN	GND
6	PRE_IN06BP	PRE_IN06BN	GND	PRE_IN06AP	PRE_IN06AN	GND
7	PRE_IN07BP	PRE_IN07BN	GND	PRE_IN07AP	PRE_IN07AN	GND
8	PRE_IN08BP	PRE_IN08BN	GND	PRE_IN08AP	PRE_IN08AN	GND
9	PRE_IN09BP	PRE_IN09BN	GND	PRE_IN09AP	PRE_IN09AN	GND
10	PRE_IN10BP	PRE_IN10BN	GND	PRE_IN10AP	PRE_IN10AN	GND

MB-1150 (3/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_3

MB-1150 (4/20)
SUFFIX: -11

Front MIX-53

CNA104

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET2	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
6	BD_EXT_3F	BD_EXT_3R	GND	SD/HD0	SD/HD0	GND
7	GND (SLOT_N=0)	GND (SLOT_N=1)	GND	(SLOT_N=2)	GND (SLOT_N=3)	GND
8	GND (SLOT_N=4)	GND (SLOT_N=5)	GND	GND (SLOT_N=6)	GND (SLOT_N=7)	GND
9			GND			GND
10			GND			GND

CNB104

	A	B	BG	C	D	DG
1	VCLK9P	VCLK9N	GND			GND
2	FD9P	FD9N	GND	VD9P	VD9N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET5_TRX0P	INET5_TRX0N	GND	INET5_TRX1P	INET5_TRX1N	GND
7	INET5_TRX2P	INET5_TRX2N	GND	INET5_TRX3P	INET5_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE104

	A	B	BG	C	D	DG
1	ME3_KEY6_SRCBP	ME3_KEY6_SRCBN	GND	ME3_KEY2_SRCBP	ME3_KEY2_SRCBN	GND
2	ME3_KEY6_SRCAP	ME3_KEY6_SRCAN	GND	ME3_KEY2_SRCAP	ME3_KEY2_SRCAN	GND
3	ME3_KEY6_FILBP	ME3_KEY6_FILBN	GND	ME3_KEY2_FILBP	ME3_KEY2_FILBN	GND
4	ME3_OUT8P	ME3_OUT8N	GND	ME3_KEY2_FILAP	ME3_KEY2_FILAN	GND
5	ME3_OUT7P	ME3_OUT7N	GND	ME3_KEY6_FILAP	ME3_KEY6_FILAN	GND
6	ME3_OUT6P	ME3_OUT6N	GND	ME3_KEY5_SRCBP	ME3_KEY5_SRCBN	GND
7	ME3_OUT5P	ME3_OUT5N	GND	ME3_KEY1_SRCBP	ME3_KEY1_SRCBN	GND
8	ME3_KEY5_SRCAP	ME3_KEY5_SRCAN	GND	ME3_KEY1_SRCAP	ME3_KEY1_SRCAN	GND
9	ME3_KEY5_FILBP	ME3_KEY5_FILBN	GND	ME3_KEY1_FILBP	ME3_KEY1_FILBN	GND
10	ME3_KEY5_FILAP	ME3_KEY5_FILAN	GND	ME3_KEY1_FILAP	ME3_KEY1_FILAN	GND

CNG104

	A	B	BG	C	D	DG
1			GND	ME3_EXT_DMEBP	ME3_EXT_DMEBN	GND
2			GND	ME3_EXT_DMEAP	ME3_EXT_DMEAN	GND
3	IBGCLP	IBGCLN	GND			GND
4			GND	ME3_UTIL3BP	ME3_UTIL3BN	GND
5			GND	ME3_UTIL3AP	ME3_UTIL3AN	GND
6			GND	ME3_UTIL2BP	ME3_UTIL2BN	GND
7			GND	ME3_UTIL2AP	ME3_UTIL2AN	GND
8	ME3_PROCKP	ME3_PROCKN	GND			GND
9			GND	ME3_UTIL1BP	ME3_UTIL1BN	GND
10	ME3_PROCVP	ME3_PROCVN	GND	ME3_UTIL1AP	ME3_UTIL1AN	GND

CNJ104

	A	B	BG	C	D	DG
1	ME3_SEND4KP	ME3_SEND4KN	GND	ME3_MVE4KP	ME3_MVE4KN	GND
2	ME3_SEND2KP	ME3_SEND2KN	GND	ME3_MVE2KP	ME3_MVE2KN	GND
3			GND			GND
4	ME3_SEND4VP	ME3_SEND4VN	GND	ME3_MVE4VP	ME3_MVE4VN	GND
5	ME3_SEND2VP	ME3_SEND2VN	GND	ME3_MVE2VP	ME3_MVE2VN	GND
6	ME3_SEND3KP	ME3_SEND3KN	GND	ME3_MVE3KP	ME3_MVE3KN	GND
7	ME3_SEND1KP	ME3_SEND1KN	GND	ME3_MVE1KP	ME3_MVE1KN	GND
8			GND			GND
9	ME3_SEND3VP	ME3_SEND3VN	GND	ME3_MVE3VP	ME3_MVE3VN	GND
10	ME3_SEND1VP	ME3_SEND1VN	GND	ME3_MVE1VP	ME3_MVE1VN	GND

CNL104

	A	B	BG	C	D	DG
1	ME3_EXT_OUT4P	ME3_EXT_OUT4N	GND	ME3_DMEKBP	ME3_DMEKBN	GND
2			GND	ME3_DMEKAP	ME3_DMEKAN	GND
3	ME3_EXT_OUT3P	ME3_EXT_OUT3N	GND			GND
4			GND	ME3_DMEVBP	ME3_DMEVBN	GND
5			GND	ME3_DMEVAP	ME3_DMEVAN	GND
6			GND	ME3_BKGDBBP	ME3_BKGDBBN	GND
7			GND	ME3_BKGDBAP	ME3_BKGDBAN	GND
8	ME3_EXT_OUT2P	ME3_EXT_OUT2N	GND			GND
9			GND	ME3_BKGDABP	ME3_BKGDABN	GND
10	ME3_EXT_OUT1P	ME3_EXT_OUT1N	GND	ME3_BKGDAAP	ME3_BKGDAAN	GND

CNP104

	A	B	BG	C	D	DG
1	ME3_KEY8_SRCBP	ME3_KEY8_SRCBN	GND	ME3_KEY4_SRCBP	ME3_KEY4_SRCBN	GND
2	ME3_KEY8_SRCAP	ME3_KEY8_SRCAN	GND	ME3_KEY4_SRCAP	ME3_KEY4_SRCAN	GND
3	ME3_KEY8_FILBP	ME3_KEY8_FILBN	GND	ME3_KEY4_FILBP	ME3_KEY4_FILBN	GND
4	ME3_OUT4P	ME3_OUT4N	GND	ME3_KEY4_FILAP	ME3_KEY4_FILAN	GND
5	ME3_OUT3P	ME3_OUT3N	GND	ME3_KEY8_FILAP	ME3_KEY8_FILAN	GND
6	ME3_OUT2P	ME3_OUT2N	GND	ME3_KEY7_SRCBP	ME3_KEY7_SRCBN	GND
7	ME3_OUT1P	ME3_OUT1N	GND	ME3_KEY3_SRCBP	ME3_KEY3_SRCBN	GND
8	ME3_KEY7_SRCAP	ME3_KEY7_SRCAN	GND	ME3_KEY3_SRCAP	ME3_KEY3_SRCAN	GND
9	ME3_KEY7_FILBP	ME3_KEY7_FILBN	GND	ME3_KEY3_FILBP	ME3_KEY3_FILBN	GND
10	ME3_KEY7_FILAP	ME3_KEY7_FILAN	GND	ME3_KEY3_FILAP	ME3_KEY3_FILAN	GND

Rear CNO-38A

CNA204

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_N=4)	GND (SLOT_N=5)	GND	GND (SLOT_N=6)	GND (SLOT_N=7)	GND
4	GND (SLOT_N=0)	GND (SLOT_N=1)	GND	(SLOT_N=2)	GND (SLOT_N=3)	GND
5	BD_EXT_3F	BD_EXT_3R	GND	SD/HD0	SD/HD0	GND
6	RESET2	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF204

	A	B	BG	C	D	DG
1			GND	ME3_EXT_OUT3P	ME3_EXT_OUT3N	GND
2			GND	ME3_EXT_OUT4P	ME3_EXT_OUT4N	GND
3			GND	ME4_EXT_OUT1P	ME4_EXT_OUT1N	GND
4			GND	ME4_EXT_OUT2P	ME4_EXT_OUT2N	GND
5			GND	ME4_EXT_OUT3P	ME4_EXT_OUT3N	GND
6			GND	ME4_EXT_OUT4P	ME4_EXT_OUT4N	GND
7			GND	ME5_EXT_OUT1P	ME5_EXT_OUT1N	GND
8			GND	ME5_EXT_OUT2P	ME5_EXT_OUT2N	GND
9			GND	ME5_EXT_OUT3P	ME5_EXT_OUT3N	GND
10			GND	ME5_EXT_OUT4P	ME5_EXT_OUT4N	GND

CNN204

	A	B	BG	C	D	DG
1			GND	ME1_EXT_OUT1P	ME1_EXT_OUT1N	GND
2			GND	ME1_EXT_OUT2P	ME1_EXT_OUT2N	GND
3			GND	ME1_EXT_OUT3P	ME1_EXT_OUT3N	GND
4			GND	ME1_EXT_OUT4P	ME1_EXT_OUT4N	GND
5			GND	ME2_EXT_OUT1P	ME2_EXT_OUT1N	GND
6			GND	ME2_EXT_OUT2P	ME2_EXT_OUT2N	GND
7			GND	ME2_EXT_OUT3P	ME2_EXT_OUT3N	GND
8			GND	ME2_EXT_OUT4P	ME2_EXT_OUT4N	GND
9			GND	ME3_EXT_OUT1P	ME3_EXT_OUT1N	GND
10			GND	ME3_EXT_OUT2P	ME3_EXT_OUT2N	GND

MB-1150 (4/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_4

MB-1150 (5/20)
SUFFIX: -11

Front XPT-31

Rear CNI-37

CNA205

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_4F	BD_EXT_4R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6			GND	GND (*X for CNI)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF205

	A	B	BG	C	D	DG
1			GND	IN011P	IN011N	GND
2			GND	IN012P	IN012N	GND
3			GND	IN013P	IN013N	GND
4			GND	IN014P	IN014N	GND
5			GND	IN015P	IN015N	GND
6			GND	IN016P	IN016N	GND
7			GND	IN017P	IN017N	GND
8			GND	IN018P	IN018N	GND
9			GND	IN019P	IN019N	GND
10			GND	IN020P	IN020N	GND

CNN205

	A	B	BG	C	D	DG
1			GND	IN001P	IN001N	GND
2			GND	IN002P	IN002N	GND
3			GND	IN003P	IN003N	GND
4			GND	IN004P	IN004N	GND
5			GND	IN005P	IN005N	GND
6			GND	IN006P	IN006N	GND
7			GND	IN007P	IN007N	GND
8			GND	IN008P	IN008N	GND
9			GND	IN009P	IN009N	GND
10			GND	IN010P	IN010N	GND

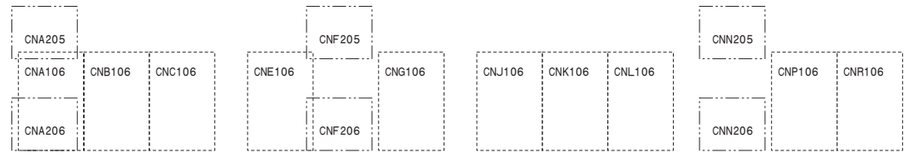

MB-1150 (5/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_5

4-155

Front XPT-31

CNA106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
4												
5	RESET0	DC_ENBL0	GND	GND (HX for CNI)	FUSE+12V	GND			GND			GND
6	BD_EXT_5F	BD_EXT_5R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND	(INET_TRX0P)	(INET_TRX0N)	GND	(INET_TRX1P)	(INET_TRX1N)	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND	(INET_TRX2P)	(INET_TRX2N)	GND	(INET_TRX3P)	(INET_TRX3N)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND			GND			GND
9	VCLK2P	VCLK2N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND			GND			GND
10	FD8P	FD8N	GND	VD8P	VD8N	GND			GND			GND

CNB106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND	(XPT_CLK0p)	(XPT_CLK0n)	GND	(XPT_CS0An)	(XPT_CS0Bn)	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND	(XPT_CLK1p)	(XPT_CLK1n)	GND	(XPT_CS1An)	(XPT_CS1Bn)	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND	(XPT_CLK2p)	(XPT_CLK2n)	GND	(XPT_CS2An)	(XPT_CS2Bn)	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND	(XPT_CLK3p)	(XPT_CLK3n)	GND	(XPT_CS3An)	(XPT_CS3Bn)	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND	(XPT_CLK4p)	(XPT_CLK4n)	GND	(XPT_CS4An)	(XPT_CS4Bn)	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND	(XPT_CLK5p)	(XPT_CLK5n)	GND	(XPT_CS5An)	(XPT_CS5Bn)	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND	(XPT_WE0n)	(XPT_WE1n)	GND	(XPT_WAIT0n)	(XPT_WAIT1n)	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND	(XPT_WE2n)	(XPT_WE3n)	GND	(XPT_WAIT2n)	(XPT_WAIT3n)	GND
9	XPT_CLK5p	XPT_CLK5n	GND	XPT_CS5An	XPT_CS5Bn	GND	(XPT_WE4n)	(XPT_WE5n)	GND	(XPT_WAIT4n)	(XPT_WAIT5n)	GND
10	XPT_WE5n	XPT_WAIT5n	GND	XPT_OEn	XPT_RESET2n	GND	(XPT_OEn)	(XPT_RESET0n)	GND	(XPT_RESET1n)	(XPT_RESET2n)	GND

CNC106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	IN140P	IN140N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
2	IN139P	IN139N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
3	IN138P	IN138N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
4	IN137P	IN137N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
5	IN136P	IN136N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT8P	ME5_OUT8N	GND
6	IN135P	IN135N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT7P	ME5_OUT7N	GND
7	IN134P	IN134N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT6P	ME5_OUT6N	GND
8	IN133P	IN133N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT5P	ME5_OUT5N	GND
9	IN132P	IN132N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_PROCKP	ME5_PROCKN	GND
10	IN131P	IN131N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_PROCVP	ME5_PROCVN	GND

CNE106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	IN120P	IN120N	GND	IN100P	IN100N	GND	IN080P	IN080N	GND	PRE_IN20BP	PRE_IN20BN	GND
2	IN119P	IN119N	GND	IN099P	IN099N	GND	IN079P	IN079N	GND	PRE_IN19BP	PRE_IN19BN	GND
3	IN118P	IN118N	GND	IN098P	IN098N	GND	IN078P	IN078N	GND	PRE_IN18BP	PRE_IN18BN	GND
4	IN117P	IN117N	GND	IN097P	IN097N	GND	IN077P	IN077N	GND	PRE_IN17BP	PRE_IN17BN	GND
5	IN116P	IN116N	GND	IN096P	IN096N	GND	IN076P	IN076N	GND	PRE_IN16BP	PRE_IN16BN	GND
6	IN115P	IN115N	GND	IN095P	IN095N	GND	IN075P	IN075N	GND	PRE_IN15BP	PRE_IN15BN	GND
7	IN114P	IN114N	GND	IN094P	IN094N	GND	IN074P	IN074N	GND	PRE_IN14BP	PRE_IN14BN	GND
8	IN113P	IN113N	GND	IN093P	IN093N	GND	IN073P	IN073N	GND	PRE_IN13BP	PRE_IN13BN	GND
9	IN112P	IN112N	GND	IN092P	IN092N	GND	IN072P	IN072N	GND	PRE_IN12BP	PRE_IN12BN	GND
10	IN111P	IN111N	GND	IN091P	IN091N	GND	IN071P	IN071N	GND	PRE_IN11BP	PRE_IN11BN	GND

CNG106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	CCR_IN4BP	CCR_IN4BN	GND	ME1_KEY6_SRCBP	ME1_KEY6_SRCBN	GND	DME_UTIL2BP	DME_UTIL2BN	GND	ME4_KEY2_SRCBP	ME4_KEY2_SRCBN	GND
2	CCR_IN3BP	CCR_IN3BN	GND	ME1_KEY6_FILBP	ME1_KEY6_FILBN	GND	DME_UTIL1BP	DME_UTIL1BN	GND	ME4_KEY2_FILBP	ME4_KEY2_FILBN	GND
3	CCR_IN2BP	CCR_IN2BN	GND	ME1_KEY1_SRCBP	ME1_KEY1_SRCBN	GND	ME4_KEY6_SRCBP	ME4_KEY6_SRCBN	GND	ME4_KEY5_SRCBP	ME4_KEY5_SRCBN	GND
4	CCR_IN1BP	CCR_IN1BN	GND	ME1_KEY5_FILBP	ME1_KEY5_FILBN	GND	ME4_KEY6_FILBP	ME4_KEY6_FILBN	GND	ME4_KEY1_FILBP	ME4_KEY1_FILBN	GND
5	OUT24_INBP	OUT24_INBN	GND	ME2_KEY6_SRCBP	ME2_KEY6_SRCBN	GND	ME4_KEY1_SRCBP	ME4_KEY1_SRCBN	GND	ME3_KEY6_SRCBP	ME3_KEY6_SRCBN	GND
6	OUT23_INBP	OUT23_INBN	GND	ME2_KEY6_FILBP	ME2_KEY6_FILBN	GND	ME4_KEY5_FILBP	ME4_KEY5_FILBN	GND	ME3_KEY6_FILBP	ME3_KEY6_FILBN	GND
7	OUT22_INBP	OUT22_INBN	GND	ME2_EXT_DMEBP	ME2_EXT_DMEBN	GND	ME3_EXT_DMEBP	ME3_EXT_DMEBN	GND	ME3_KEY1_SRCBP	ME3_KEY1_SRCBN	GND
8	OUT21_INBP	OUT21_INBN	GND	ME2_UTIL3BP	ME2_UTIL3BN	GND	ME3_UTIL3BP	ME3_UTIL3BN	GND	ME3_KEY5_FILBP	ME3_KEY5_FILBN	GND
9	OUT48_INBP	OUT48_INBN	GND	ME2_UTIL2BP	ME2_UTIL2BN	GND	ME3_UTIL2BP	ME3_UTIL2BN	GND	ME3_KEY2_SRCBP	ME3_KEY2_SRCBN	GND
10	OUT47_INBP	OUT47_INBN	GND	ME2_UTIL1BP	ME2_UTIL1BN	GND	ME3_UTIL1BP	ME3_UTIL1BN	GND	ME3_KEY2_FILBP	ME3_KEY2_FILBN	GND

CNJ106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT46_INBP	OUT46_INBN	GND	ME1_EXT_DMEBP	ME1_EXT_DMEBN	GND	ME2_KEY1_SRCBP	ME2_KEY1_SRCBN	GND	ME3_KEY5_SRCBP	ME3_KEY5_SRCBN	GND
2	OUT45_INBP	OUT45_INBN	GND	ME1_UTIL3BP	ME1_UTIL3BN	GND	ME2_KEY5_FILBP	ME2_KEY5_FILBN	GND	ME3_KEY1_FILBP	ME3_KEY1_FILBN	GND
3	OUT20_INBP	OUT20_INBN	GND	ME1_UTIL2BP	ME1_UTIL2BN	GND	ME2_KEY2_SRCBP	ME2_KEY2_SRCBN	GND	ME4_EXT_DMEBP	ME4_EXT_DMEBN	GND
4	OUT19_INBP	OUT19_INBN	GND	ME1_UTIL1BP	ME1_UTIL1BN	GND	ME2_KEY2_FILBP	ME2_KEY2_FILBN	GND	ME4_UTIL3BP	ME4_UTIL3BN	GND
5	OUT18_INBP	OUT18_INBN	GND	OUT40_INBP	OUT40_INBN	GND	ME2_KEY5_SRCBP	ME2_KEY5_SRCBN	GND	ME4_UTIL2BP	ME4_UTIL2BN	GND
6	OUT17_INBP	OUT17_INBN	GND	OUT39_INBP	OUT39_INBN	GND	ME2_KEY1_FILBP	ME2_KEY1_FILBN	GND	ME4_UTIL1BP	ME4_UTIL1BN	GND
7	OUT44_INBP	OUT44_INBN	GND	OUT38_INBP	OUT38_INBN	GND	ME1_KEY2_SRCBP	ME1_KEY2_SRCBN	GND	ME5_EXT_DMEBP	ME5_EXT_DMEBN	GND
8	OUT43_INBP	OUT43_INBN	GND	OUT16_INBP	OUT16_INBN	GND	ME1_KEY2_FILBP	ME1_KEY2_FILBN	GND	ME5_UTIL3BP	ME5_UTIL3BN	GND
9	OUT42_INBP	OUT42_INBN	GND	OUT15_INBP	OUT15_INBN	GND	ME1_KEY5_SRCBP	ME1_KEY5_SRCBN	GND	ME5_UTIL2BP	ME5_UTIL2BN	GND
10	OUT41_INBP	OUT41_INBN	GND	OUT14_INBP	OUT14_INBN	GND	ME1_KEY1_FILBP	ME1_KEY1_FILBN	GND	ME5_UTIL1BP	ME5_UTIL1BN	GND

CNK106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	IN130P	IN130N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
2	IN129P	IN129N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
3	IN128P	IN128N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
4	IN127P	IN127N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
5	IN126P	IN126N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
6	IN125P	IN125N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND
7	IN124P	IN124N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT4P	ME5_OUT4N	GND
8	IN123P	IN123N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT3P	ME5_OUT3N	GND
9	IN122P	IN122N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT2P	ME5_OUT2N	GND
10	IN121P	IN121N	GND	NO_USE_INP	NO_USE_INN	GND	NO_USE_INP	NO_USE_INN	GND	ME5_OUT1P	ME5_OUT1N	GND

CNL106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	IN110P	IN110N	GND	IN090P	IN090N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN10BP	PRE_IN10BN	GND
2	IN109P	IN109N	GND	IN089P	IN089N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN09BP	PRE_IN09BN	GND
3	IN108P	IN108N	GND	IN088P	IN088N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN08BP	PRE_IN08BN	GND
4	IN107P	IN107N	GND	IN087P	IN087N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN07BP	PRE_IN07BN	GND
5	IN106P	IN106N	GND	IN086P	IN086N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN06BP	PRE_IN06BN	GND
6	IN105P	IN105N	GND	IN085P	IN085N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN05BP	PRE_IN05BN	GND
7	IN104P	IN104N	GND	IN084P	IN084N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN04BP	PRE_IN04BN	GND
8	IN103P	IN103N	GND	IN083P	IN083N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN03BP	PRE_IN03BN	GND
9	IN102P	IN102N	GND	IN082P	IN082N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN02BP	PRE_IN02BN	GND
10	IN101P	IN101N	GND	IN081P	IN081N	GND	NO_USE_INP	NO_USE_INN	GND	PRE_IN01BP	PRE_IN01BN	GND

CNP106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT13_INBP	OUT13_INBN	GND	ME1_DMEKBP	ME1_DMEKBN	GND	ME3_DMEKBP	ME3_DMEKBN	GND	ME4_DMEKBP	ME4_DMEKBN	GND
2	OUT12_INBP	OUT12_INBN	GND	ME1_DMEVBP	ME1_DMEVBN	GND	ME3_DMEVBP	ME3_DMEVBN	GND	ME4_DMEVBP	ME4_DMEVBN	GND
3	OUT11_INBP	OUT11_INBN	GND	ME1_BKGDBBP	ME1_BKGDBBN	GND	ME3_BKGDBBP	ME3_BKGDBBN	GND	ME4_BKGDBBP	ME4_BKGDBBN	GND
4	OUT10_INBP	OUT10_INBN	GND	ME1_BKGDABP	ME1_BKGDABN	GND	ME3_BKGDABP	ME3_BKGDABN	GND	ME4_BKGDABP	ME4_BKGDABN	GND
5	OUT09_INBP	OUT09_INBN	GND	ME2_KEY8_SRCBP	ME2_KEY8_SRCBN	GND	ME2_KEY4_SRCBP	ME2_KEY4_SRCBN	GND	ME3_KEY4_SRCBP	ME3_KEY4_SRCBN	GND
6	OUT37_INBP	OUT37_INBN	GND	ME1_KEY8_SRCBP	ME1_KEY8_SRCBN	GND	ME1_KEY4_SRCBP	ME1_KEY4_SRCBN	GND	ME3_KEY4_FILBP	ME3_KEY4_FILBN	GND
7	OUT36_INBP	OUT36_INBN	GND	ME2_KEY8_FILBP	ME2_KEY8_FILBN	GND	ME2_KEY4_FILBP	ME2_KEY4_FILBN	GND	ME3_KEY7_SRCBP	ME3_KEY7_SRCBN	GND
8	OUT35_INBP	OUT35_INBN	GND	ME1_KEY8_FILBP	ME1_KEY8_FILBN	GND	ME1_KEY4_FILBP	ME1_KEY4_FILBN	GND	ME3_KEY3_FILBP	ME3_KEY3_FILBN	GND
9	OUT34_INBP	OUT34_INBN	GND	ME2_KEY3_SRCBP	ME2_KEY3_SRCBN	GND	ME2_KEY7_SRCBP	ME2_KEY7_SRCBN	GND	ME5_DMEKBP	ME5_DMEKBN	GND
10	OUT33_INBP	OUT33_INBN	GND	ME1_KEY3_SRCBP	ME1_KEY3_SRCBN	GND	ME1_KEY7_SRCBP	ME1_KEY7_SRCBN	GND	ME5_DMEVBP	ME5_DMEVBN	GND

CNR106

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT32_INBP	OUT32_INBN	GND	ME2_KEY7_FILBP	ME2_KEY7_FILBN	GND	ME2_KEY3_FILBP	ME2_KEY3_FILBN	GND	ME5_BKGDBBP	ME5_BKGDBBN	GND
2	OUT31_INBP	OUT31_INBN	GND	ME1_KEY7_FILBP	ME1_KEY7_FILBN	GND	ME1_KEY3_FILBP	ME1_KEY3_FILBN	GND	ME5_BKGDABP	ME5_BKGDABN	GND
3	OUT30_INBP	OUT30_INBN	GND	OUT08_INBP	OUT08_INBN	GND	ME2_DMEKBP	ME2_DMEKBN	GND	ME3_KEY8_SRCBP	ME3_KEY8_SRCBN	GND
4	OUT29_INBP	OUT29_INBN	GND	OUT07_INBP	OUT07_INBN	GND	ME2_DMEVBP	ME2_DMEVBN	GND	ME3_KEY8_FILBP	ME3_KEY8_FILBN	GND
5	FM_IN2BP	FM_IN2BN	GND	OUT06_INBP	OUT06_INBN	GND	ME2_BKGDBBP	ME2_BKGDBBN	GND	ME3_KEY3_SRCBP	ME3_KEY3_SRCBN	GND
6	OUT28_INBP	OUT28_INBN	GND	OUT05_INBP	OUT05_INBN	GND	ME2_BKGDABP	ME2_BKGDABN	GND	ME3_KEY7_FILBP	ME3_KEY7_FILBN	GND
7	OUT27_INBP	OUT27_INBN	GND	OUT04_INBP	OUT04_INBN	GND	ME4_KEY8_SRCBP	ME4_KEY8_SRCBN	GND	ME4_KEY4_SRCBP	ME4_KEY4_SRCBN	GND
8	OUT26_INBP	OUT26_INBN	GND	OUT03_INBP	OUT03_INBN	GND	ME4_KEY8_FILBP	ME4_KEY8_FILBN	GND	ME4_KEY4_FILBP	ME4_KEY4_FILBN	GND
9	OUT25_INBP	OUT25_INBN	GND	OUT02_INBP	OUT02_INBN	GND	ME4_KEY3_SRCBP	ME4_KEY3_SRCBN	GND	ME4_KEY7_SRCBP	ME4_KEY7_SRCBN	GND
10	FM_IN1BP	FM_IN1BN	GND	OUT01_INBP	OUT01_INBN	GND	ME4_KEY7_FILBP	ME4_KEY7_FILBN	GND	ME4_KEY3_FILBP	ME4_KEY3_FILBN	GND

Rear CNI-37

CNA206

	A	B	BG	C	D	DG
1	FD8P	FD8N	GND	VD8P	VD8N	GND
2	VCLK2P	VCLK2N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_5F	BD_EXT_5R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	RESET0	DC_ENBL0	GND	GND (HX for CNI)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF206

	A	B	BG	C	D	DG
1			GND	IN031P	IN031N	GND
2			GND	IN032P	IN032N	GND
3			GND	IN033P	IN033N	GND
4			GND	IN034P	IN034N	GND
5			GND	IN035P	IN035N	GND
6			GND	IN036P	IN036N	GND
7			GND	IN037P	IN037N	GND
8			GND	IN038P	IN038N	GND
9			GND	IN039P	IN039N	GND
10			GND	IN040P	IN040N	GND

CNN206

	A	B	BG	C	D	DG
1			GND	IN021P	IN021N	GND
2			GND	IN022P	IN022N	GND
3			GND	IN023P	IN023N	GND
4			GND	IN024P	IN024N	GND
5			GND	IN025P	IN025N	GND
6			GND	IN026P	IN026N	GND
7			GND	IN027P	IN027N	GND
8			GND	IN028P	IN028N	GND
9			GND	IN029P	IN029N	GND
10			GND	IN030P	IN030N	GND

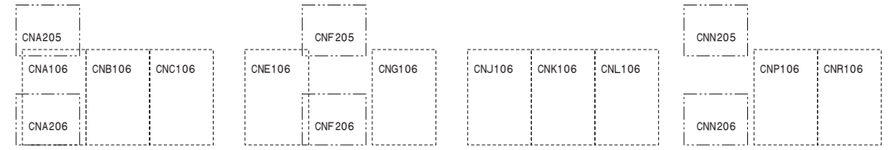

MB-1150 (6/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_6

MVS-8000X/7000X

A B C D E F G H

Front MIX-53

CNA107

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET2	DC_ENBL1	GND	GND (※X for CN1)	FUSE+12V	GND
6	BD_EXT_6F	BD_EXT_6R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
7	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNB107

	A	B	BG	C	D	DG
1	VCLK7P	VCLK7N	GND			GND
2	FD7P	FD7N	GND	VD7P	VD7N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET4_TRX0P	INET4_TRX0N	GND	INET4_TRX1P	INET4_TRX1N	GND
7	INET4_TRX2P	INET4_TRX2N	GND	INET4_TRX3P	INET4_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE107

	A	B	BG	C	D	DG
1	ME2_KEY6_SRCBP	ME2_KEY6_SRCBN	GND	ME2_KEY2_SRCBP	ME2_KEY2_SRCBN	GND
2	ME2_KEY6_SRCAP	ME2_KEY6_SRCAN	GND	ME2_KEY2_SRCAP	ME2_KEY2_SRCAN	GND
3	ME2_KEY6_FILBP	ME2_KEY6_FILBN	GND	ME2_KEY2_FILBP	ME2_KEY2_FILBN	GND
4	ME2_OUT8P	ME2_OUT8N	GND	ME2_KEY2_FILAP	ME2_KEY2_FILAN	GND
5	ME2_OUT7P	ME2_OUT7N	GND	ME2_KEY6_FILAP	ME2_KEY6_FILAN	GND
6	ME2_OUT6P	ME2_OUT6N	GND	ME2_KEY5_SRCBP	ME2_KEY5_SRCBN	GND
7	ME2_OUT5P	ME2_OUT5N	GND	ME2_KEY1_SRCBP	ME2_KEY1_SRCBN	GND
8	ME2_KEY5_SRCAP	ME2_KEY5_SRCAN	GND	ME2_KEY1_SRCAP	ME2_KEY1_SRCAN	GND
9	ME2_KEY5_FILBP	ME2_KEY5_FILBN	GND	ME2_KEY1_FILBP	ME2_KEY1_FILBN	GND
10	ME2_KEY5_FILAP	ME2_KEY5_FILAN	GND	ME2_KEY1_FILAP	ME2_KEY1_FILAN	GND

CNG107

	A	B	BG	C	D	DG
1			GND	ME2_EXT_DMEBP	ME2_EXT_DMEBN	GND
2			GND	ME2_EXT_DMEAP	ME2_EXT_DMEAN	GND
3	ME2_BGCOLP	ME2_BGCOLN	GND			GND
4			GND	ME2_UTIL3BP	ME2_UTIL3BN	GND
5			GND	ME2_UTIL3AP	ME2_UTIL3AN	GND
6			GND	ME2_UTIL2BP	ME2_UTIL2BN	GND
7			GND	ME2_UTIL2AP	ME2_UTIL2AN	GND
8	ME2_PROCKP	ME2_PROCKN	GND			GND
9			GND	ME2_UTIL1BP	ME2_UTIL1BN	GND
10	ME2_PROCVP	ME2_PROCVN	GND	ME2_UTIL1AP	ME2_UTIL1AN	GND

CNJ107

	A	B	BG	C	D	DG
1	ME2_SEND4KP	ME2_SEND4KN	GND	ME2_MVE4KP	ME2_MVE4KN	GND
2	ME2_SEND2KP	ME2_SEND2KN	GND	ME2_MVE2KP	ME2_MVE2KN	GND
3			GND			GND
4	ME2_SEND4VP	ME2_SEND4VN	GND	ME2_MVE4VP	ME2_MVE4VN	GND
5	ME2_SEND2VP	ME2_SEND2VN	GND	ME2_MVE2VP	ME2_MVE2VN	GND
6	ME2_SEND3KP	ME2_SEND3KN	GND	ME2_MVE3KP	ME2_MVE3KN	GND
7	ME2_SEND1KP	ME2_SEND1KN	GND	ME2_MVE1KP	ME2_MVE1KN	GND
8			GND			GND
9	ME2_SEND3VP	ME2_SEND3VN	GND	ME2_MVE3VP	ME2_MVE3VN	GND
10	ME2_SEND1VP	ME2_SEND1VN	GND	ME2_MVE1VP	ME2_MVE1VN	GND

CNL107

	A	B	BG	C	D	DG
1	ME2_EXT_OUT4P	ME2_EXT_OUT4N	GND	ME2_DMEKBP	ME2_DMEKBN	GND
2			GND	ME2_DMEKAP	ME2_DMEKAN	GND
3	ME2_EXT_OUT3P	ME2_EXT_OUT3N	GND			GND
4			GND	ME2_DMEVBP	ME2_DMEVBN	GND
5			GND	ME2_DMEVAP	ME2_DMEVAN	GND
6			GND	ME2_BKGDBBP	ME2_BKGDBBN	GND
7			GND	ME2_BKGDBAP	ME2_BKGDBAN	GND
8	ME2_EXT_OUT2P	ME2_EXT_OUT2N	GND			GND
9			GND	ME2_BKGDABP	ME2_BKGDABN	GND
10	ME2_EXT_OUT1P	ME2_EXT_OUT1N	GND	ME2_BKGDAAP	ME2_BKGDAAN	GND

CNP107

	A	B	BG	C	D	DG
1	ME2_KEY8_SRCBP	ME2_KEY8_SRCBN	GND	ME2_KEY4_SRCBP	ME2_KEY4_SRCBN	GND
2	ME2_KEY8_SRCAP	ME2_KEY8_SRCAN	GND	ME2_KEY4_SRCAP	ME2_KEY4_SRCAN	GND
3	ME2_KEY8_FILBP	ME2_KEY8_FILBN	GND	ME2_KEY4_FILBP	ME2_KEY4_FILBN	GND
4	ME2_OUT4P	ME2_OUT4N	GND	ME2_KEY4_FILAP	ME2_KEY4_FILAN	GND
5	ME2_OUT3P	ME2_OUT3N	GND	ME2_KEY8_FILAP	ME2_KEY8_FILAN	GND
6	ME2_OUT2P	ME2_OUT2N	GND	ME2_KEY7_SRCBP	ME2_KEY7_SRCBN	GND
7	ME2_OUT1P	ME2_OUT1N	GND	ME2_KEY3_SRCBP	ME2_KEY3_SRCBN	GND
8	ME2_KEY7_SRCAP	ME2_KEY7_SRCAN	GND	ME2_KEY3_SRCAP	ME2_KEY3_SRCAN	GND
9	ME2_KEY7_FILBP	ME2_KEY7_FILBN	GND	ME2_KEY3_FILBP	ME2_KEY3_FILBN	GND
10	ME2_KEY7_FILAP	ME2_KEY7_FILAN	GND	ME2_KEY3_FILAP	ME2_KEY3_FILAN	GND

Rear CNI-37

CNA207

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_6F	BD_EXT_6R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
6	RESET2	DC_ENBL1	GND	GND (※X for CN1)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF207

	A	B	BG	C	D	DG
1			GND	IN051P	IN051N	GND
2			GND	IN052P	IN052N	GND
3			GND	IN053P	IN053N	GND
4			GND	IN054P	IN054N	GND
5			GND	IN055P	IN055N	GND
6			GND	IN056P	IN056N	GND
7			GND	IN057P	IN057N	GND
8			GND	IN058P	IN058N	GND
9			GND	IN059P	IN059N	GND
10			GND	IN060P	IN060N	GND

CNN207

	A	B	BG	C	D	DG
1			GND	IN041P	IN041N	GND
2			GND	IN042P	IN042N	GND
3			GND	IN043P	IN043N	GND
4			GND	IN044P	IN044N	GND
5			GND	IN045P	IN045N	GND
6			GND	IN046P	IN046N	GND
7			GND	IN047P	IN047N	GND
8			GND	IN048P	IN048N	GND
9			GND	IN049P	IN049N	GND
10			GND	IN050P	IN050N	GND

MB-1150 (7/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_7

MB-1150 (8/20)
SUFFIX: -11

Front MIX-53

CNA108

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET1	DC_ENBL1	GND	GND (※X for CN1)	FUSE+12V	GND
6	BD_EXT_7F	BD_EXT_7R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
7	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNB108

	A	B	BG	C	D	DG
1	VCLK5P	VCLK5N	GND			GND
2	FD6P	FD6N	GND	VD6P	VD6N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET2_TRX0P	INET2_TRX0N	GND	INET2_TRX1P	INET2_TRX1N	GND
7	INET2_TRX2P	INET2_TRX2N	GND	INET2_TRX3P	INET2_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE108

	A	B	BG	C	D	DG
1	ME1_KEY6_SRCBP	ME1_KEY6_SRCBN	GND	ME1_KEY2_SRCBP	ME1_KEY2_SRCBN	GND
2	ME1_KEY6_SRCAP	ME1_KEY6_SRCAN	GND	ME1_KEY2_SRCAP	ME1_KEY2_SRCAN	GND
3	ME1_KEY6_FILBP	ME1_KEY6_FILBN	GND	ME1_KEY2_FILBP	ME1_KEY2_FILBN	GND
4	ME1_OUT8P	ME1_OUT8N	GND	ME1_KEY2_FILAP	ME1_KEY2_FILAN	GND
5	ME1_OUT7P	ME1_OUT7N	GND	ME1_KEY6_FILAP	ME1_KEY6_FILAN	GND
6	ME1_OUT6P	ME1_OUT6N	GND	ME1_KEY5_SRCBP	ME1_KEY5_SRCBN	GND
7	ME1_OUT5P	ME1_OUT5N	GND	ME1_KEY1_SRCBP	ME1_KEY1_SRCBN	GND
8	ME1_KEY5_SRCAP	ME1_KEY5_SRCAN	GND	ME1_KEY1_SRCAP	ME1_KEY1_SRCAN	GND
9	ME1_KEY5_FILBP	ME1_KEY5_FILBN	GND	ME1_KEY1_FILBP	ME1_KEY1_FILBN	GND
10	ME1_KEY5_FILAP	ME1_KEY5_FILAN	GND	ME1_KEY1_FILAP	ME1_KEY1_FILAN	GND

CNG108

	A	B	BG	C	D	DG
1			GND	ME1_EXT_DMEBP	ME1_EXT_DMEBN	GND
2			GND	ME1_EXT_DMEAP	ME1_EXT_DMEAN	GND
3	ME1_BGCOLP	ME1_BGCOLN	GND			GND
4			GND	ME1_UTIL3BP	ME1_UTIL3BN	GND
5			GND	ME1_UTIL3AP	ME1_UTIL3AN	GND
6			GND	ME1_UTIL2BP	ME1_UTIL2BN	GND
7			GND	ME1_UTIL2AP	ME1_UTIL2AN	GND
8	ME1_PROCKP	ME1_PROCKN	GND			GND
9			GND	ME1_UTIL1BP	ME1_UTIL1BN	GND
10	ME1_PROCVP	ME1_PROCVN	GND	ME1_UTIL1AP	ME1_UTIL1AN	GND

CNJ108

	A	B	BG	C	D	DG
1	ME1_SEND4KP	ME1_SEND4KN	GND	ME1_MVE4KP	ME1_MVE4KN	GND
2	ME1_SEND2KP	ME1_SEND2KN	GND	ME1_MVE2KP	ME1_MVE2KN	GND
3			GND			GND
4	ME1_SEND4VP	ME1_SEND4VN	GND	ME1_MVE4VP	ME1_MVE4VN	GND
5	ME1_SEND2VP	ME1_SEND2VN	GND	ME1_MVE2VP	ME1_MVE2VN	GND
6	ME1_SEND3KP	ME1_SEND3KN	GND	ME1_MVE3KP	ME1_MVE3KN	GND
7	ME1_SEND1KP	ME1_SEND1KN	GND	ME1_MVE1KP	ME1_MVE1KN	GND
8			GND			GND
9	ME1_SEND3VP	ME1_SEND3VN	GND	ME1_MVE3VP	ME1_MVE3VN	GND
10	ME1_SEND1VP	ME1_SEND1VN	GND	ME1_MVE1VP	ME1_MVE1VN	GND

CNL108

	A	B	BG	C	D	DG
1	ME1_EXT_OUT4P	ME1_EXT_OUT4N	GND	ME1_DMEKBP	ME1_DMEKBN	GND
2			GND	ME1_DMEKAP	ME1_DMEKAN	GND
3	ME1_EXT_OUT3P	ME1_EXT_OUT3N	GND			GND
4			GND	ME1_DMEVBP	ME1_DMEVBN	GND
5			GND	ME1_DMEVAP	ME1_DMEVAN	GND
6			GND	ME1_BKGDBBP	ME1_BKGDBBN	GND
7			GND	ME1_BKGDBAP	ME1_BKGDBAN	GND
8	ME1_EXT_OUT2P	ME1_EXT_OUT2N	GND			GND
9			GND	ME1_BKGDABP	ME1_BKGDABN	GND
10	ME1_EXT_OUT1P	ME1_EXT_OUT1N	GND	ME1_BKGDAAP	ME1_BKGDAAN	GND

CNP108

	A	B	BG	C	D	DG
1	ME1_KEY8_SRCBP	ME1_KEY8_SRCBN	GND	ME1_KEY4_SRCBP	ME1_KEY4_SRCBN	GND
2	ME1_KEY8_SRCAP	ME1_KEY8_SRCAN	GND	ME1_KEY4_SRCAP	ME1_KEY4_SRCAN	GND
3	ME1_KEY8_FILBP	ME1_KEY8_FILBN	GND	ME1_KEY4_FILBP	ME1_KEY4_FILBN	GND
4	ME1_OUT4P	ME1_OUT4N	GND	ME1_KEY4_FILAP	ME1_KEY4_FILAN	GND
5	ME1_OUT3P	ME1_OUT3N	GND	ME1_KEY8_FILAP	ME1_KEY8_FILAN	GND
6	ME1_OUT2P	ME1_OUT2N	GND	ME1_KEY7_SRCBP	ME1_KEY7_SRCBN	GND
7	ME1_OUT1P	ME1_OUT1N	GND	ME1_KEY3_SRCBP	ME1_KEY3_SRCBN	GND
8	ME1_KEY7_SRCAP	ME1_KEY7_SRCAN	GND	ME1_KEY3_SRCAP	ME1_KEY3_SRCAN	GND
9	ME1_KEY7_FILBP	ME1_KEY7_FILBN	GND	ME1_KEY3_FILBP	ME1_KEY3_FILBN	GND
10	ME1_KEY7_FILAP	ME1_KEY7_FILAN	GND	ME1_KEY3_FILAP	ME1_KEY3_FILAN	GND

Rear CNI-37

CNA208

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_7F	BD_EXT_7R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
6	RESET1	DC_ENBL1	GND	GND (※X for CN1)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF208

	A	B	BG	C	D	DG
1			GND	IN071P	IN071N	GND
2			GND	IN072P	IN072N	GND
3			GND	IN073P	IN073N	GND
4			GND	IN074P	IN074N	GND
5			GND	IN075P	IN075N	GND
6			GND	IN076P	IN076N	GND
7			GND	IN077P	IN077N	GND
8			GND	IN078P	IN078N	GND
9			GND	IN079P	IN079N	GND
10			GND	IN080P	IN080N	GND

CNN208

	A	B	BG	C	D	DG
1			GND	IN061P	IN061N	GND
2			GND	IN062P	IN062N	GND
3			GND	IN063P	IN063N	GND
4			GND	IN064P	IN064N	GND
5			GND	IN065P	IN065N	GND
6			GND	IN066P	IN066N	GND
7			GND	IN067P	IN067N	GND
8			GND	IN068P	IN068N	GND
9			GND	IN069P	IN069N	GND
10			GND	IN070P	IN070N	GND

MB-1150 (8/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_8

MB-1150 (9/20)
SUFFIX: -11

Front XPT-31

Rear CNI-37

CNA209

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_BF	BD_EXT_BR	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6			GND	GND (*X for CNI)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF209

	A	B	BG	C	D	DG
1			GND	IN091P	IN091N	GND
2			GND	IN092P	IN092N	GND
3			GND	IN093P	IN093N	GND
4			GND	IN094P	IN094N	GND
5			GND	IN095P	IN095N	GND
6			GND	IN096P	IN096N	GND
7			GND	IN097P	IN097N	GND
8			GND	IN098P	IN098N	GND
9			GND	IN099P	IN099N	GND
10			GND	IN100P	IN100N	GND

CNN209

	A	B	BG	C	D	DG
1			GND	IN081P	IN081N	GND
2			GND	IN082P	IN082N	GND
3			GND	IN083P	IN083N	GND
4			GND	IN084P	IN084N	GND
5			GND	IN085P	IN085N	GND
6			GND	IN086P	IN086N	GND
7			GND	IN087P	IN087N	GND
8			GND	IN088P	IN088N	GND
9			GND	IN089P	IN089N	GND
10			GND	IN090P	IN090N	GND

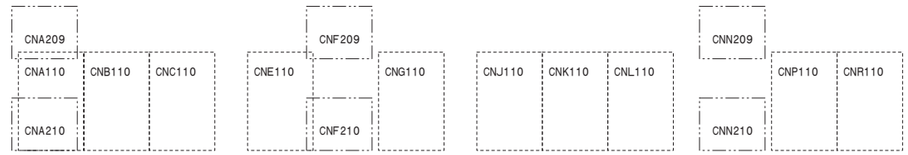

MB-1150 (9/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_9

4-159

Front XPT-31

CNA110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
4												
5	RESET0	DC_ENBL0	GND	GND (※X for CN1)	FUSE+12V	GND			GND			GND
6	BD_EXT_9F	BD_EXT_9R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND	INET0_TRX0P	INET0_TRX0N	GND	INET0_TRX1P	INET0_TRX1N	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND	INET0_TRX2P	INET0_TRX2N	GND	INET0_TRX3P	INET0_TRX3N	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND			GND			GND
9	VCLK4P	VCLK4N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND			GND			GND
10	FD5P	FD5N	GND	VD5P	VD5N	GND			GND			GND

CNB110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND	XPT_CLK0p	XPT_CLK0n	GND	XPT_CS0An	XPT_CS0Bn	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND	XPT_CLK1p	XPT_CLK1n	GND	XPT_CS1An	XPT_CS1Bn	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND	XPT_CLK2p	XPT_CLK2n	GND	XPT_CS2An	XPT_CS2Bn	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND	XPT_CLK3p	XPT_CLK3n	GND	XPT_CS3An	XPT_CS3Bn	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND	XPT_CLK4p	XPT_CLK4n	GND	XPT_CS4An	XPT_CS4Bn	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND	XPT_CLK5p	XPT_CLK5n	GND	XPT_CS5An	XPT_CS5Bn	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND	XPT_WE0n	XPT_WE1n	GND	XPT_WAIT0n	XPT_WAIT1n	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND	XPT_WE2n	XPT_WE3n	GND	XPT_WAIT2n	XPT_WAIT3n	GND
9	(XPT_CLKP)	(XPT_CLKN)	GND	(XPT_CSA)	(XPT_CSB)	GND	XPT_WE4n	XPT_WE5n	GND	XPT_WAIT4n	XPT_WAIT5n	GND
10	(XPT_WE)	(XPT_WAIT)	GND	(XPT_OE)	(XPT_RESETn)	GND	XPT_OEn	XPT_RESET0n	GND	XPT_RESET1n	XPT_RESET2n	GND

CNC110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	CCR_OUT4P	CCR_OUT4N	GND	ME3_OUT8P	ME3_OUT8N	GND	DME_MON8P	DME_MON8N	GND	ME4_OUT8P	ME4_OUT8N	GND
2	CCR_OUT3P	CCR_OUT3N	GND	ME3_OUT7P	ME3_OUT7N	GND	DME_MON7P	DME_MON7N	GND	ME4_OUT7P	ME4_OUT7N	GND
3	CCR_OUT2P	CCR_OUT2N	GND	ME3_OUT6P	ME3_OUT6N	GND	DME_MON6P	DME_MON6N	GND	ME4_OUT6P	ME4_OUT6N	GND
4	CCR_OUT1P	CCR_OUT1N	GND	ME3_OUT5P	ME3_OUT5N	GND	DME_MON5P	DME_MON5N	GND	ME4_OUT5P	ME4_OUT5N	GND
5	IN144P	IN144N	GND	ME3_PROCKP	ME3_PROCKN	GND	DME_MON4P	DME_MON4N	GND	ME4_PROCKP	ME4_PROCKN	GND
6	IN143P	IN143N	GND	IN040P	IN040N	GND	IN035P	IN035N	GND	DME_MON3P	DME_MON3N	GND
7	IN142P	IN142N	GND	IN039P	IN039N	GND	IN034P	IN034N	GND	DME_MON2P	DME_MON2N	GND
8	IN141P	IN141N	GND	IN038P	IN038N	GND	IN033P	IN033N	GND	DME_MON1P	DME_MON1N	GND
9	ME1_OUT8P	ME1_OUT8N	GND	IN037P	IN037N	GND	IN032P	IN032N	GND	ME4_PROCVP	ME4_PROCVN	GND
10	ME1_OUT7P	ME1_OUT7N	GND	IN036P	IN036N	GND	IN031P	IN031N	GND	ME3_PROCVP	ME3_PROCVN	GND

CNE110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	ME1_OUT6P	ME1_OUT6N	GND	IN060P	IN060N	GND	ME2_OUT8P	ME2_OUT8N	GND	IN020P	IN020N	GND
2	ME1_OUT5P	ME1_OUT5N	GND	IN059P	IN059N	GND	ME2_OUT7P	ME2_OUT7N	GND	IN019P	IN019N	GND
3	INFC_OUT16P	INFC_OUT16N	GND	IN058P	IN058N	GND	ME2_OUT6P	ME2_OUT6N	GND	IN018P	IN018N	GND
4	INFC_OUT08P	INFC_OUT08N	GND	IN057P	IN057N	GND	ME2_OUT5P	ME2_OUT5N	GND	IN017P	IN017N	GND
5	INFC_OUT15P	INFC_OUT15N	GND	IN056P	IN056N	GND	ME2_BGCOLP	ME2_BGCOLN	GND	IN016P	IN016N	GND
6	INFC_OUT07P	INFC_OUT07N	GND	IN055P	IN055N	GND	ME1_BGCOLP	ME1_BGCOLN	GND	IN015P	IN015N	GND
7	INFC_OUT14P	INFC_OUT14N	GND	IN054P	IN054N	GND	ME2_PROCKP	ME2_PROCKN	GND	IN014P	IN014N	GND
8	INFC_OUT06P	INFC_OUT06N	GND	IN053P	IN053N	GND	ME1_PROCKP	ME1_PROCKN	GND	IN013P	IN013N	GND
9	INFC_OUT13P	INFC_OUT13N	GND	IN052P	IN052N	GND	ME2_PROCVP	ME2_PROCVN	GND	IN012P	IN012N	GND
10	INFC_OUT05P	INFC_OUT05N	GND	IN051P	IN051N	GND	ME1_PROCVP	ME1_PROCVN	GND	IN011P	IN011N	GND

CNG110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	CCR_IN4AP	CCR_IN4AN	GND	DME_UTIL1AP	DME_UTIL1AN	GND	DME_UTIL2AP	DME_UTIL2AN	GND	ME1_KEY2_SRCAP	ME1_KEY2_SRCAN	GND
2	CCR_IN3AP	CCR_IN3AN	GND	ME1_KEY6_SRCAP	ME1_KEY6_SRCAN	GND	ME3_KEY2_SRCAP	ME3_KEY2_SRCAN	GND	ME1_KEY2_FILAP	ME1_KEY2_FILAN	GND
3	CCR_IN2AP	CCR_IN2AN	GND	ME1_KEY6_FILAP	ME1_KEY6_FILAN	GND	ME2_EXT_DMEAP	ME2_EXT_DMEAN	GND	ME1_KEY1_SRCAP	ME1_KEY1_SRCAN	GND
4	CCR_IN1AP	CCR_IN1AN	GND	ME1_KEY5_SRCAP	ME1_KEY5_SRCAN	GND	ME3_KEY2_FILAP	ME3_KEY2_FILAN	GND	ME1_KEY1_FILAP	ME1_KEY1_FILAN	GND
5	OUT48_INAP	OUT48_INAN	GND	ME1_KEY5_FILAP	ME1_KEY5_FILAN	GND	ME2_UTIL3AP	ME2_UTIL3AN	GND	ME2_KEY2_SRCAP	ME2_KEY2_SRCAN	GND
6	OUT47_INAP	OUT47_INAN	GND	ME1_EXT_DMEAP	ME1_EXT_DMEAN	GND	ME2_UTIL2AP	ME2_UTIL2AN	GND	ME2_KEY2_FILAP	ME2_KEY2_FILAN	GND
7	OUT46_INAP	OUT46_INAN	GND	ME1_UTIL3AP	ME1_UTIL3AN	GND	OUT16_INAP	OUT16_INAN	GND	ME2_KEY1_SRCAP	ME2_KEY1_SRCAN	GND
8	OUT45_INAP	OUT45_INAN	GND	ME1_UTIL2AP	ME1_UTIL2AN	GND	OUT15_INAP	OUT15_INAN	GND	ME2_KEY1_FILAP	ME2_KEY1_FILAN	GND
9	OUT24_INAP	OUT24_INAN	GND	ME1_UTIL1AP	ME1_UTIL1AN	GND	ME2_UTIL1AP	ME2_UTIL1AN	GND	ME2_KEY6_SRCAP	ME2_KEY6_SRCAN	GND
10	OUT23_INAP	OUT23_INAN	GND	OUT40_INAP	OUT40_INAN	GND	OUT14_INAP	OUT14_INAN	GND	ME2_KEY6_FILAP	ME2_KEY6_FILAN	GND

CNJ110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT22_INAP	OUT22_INAN	GND	ME3_KEY6_SRCAP	ME3_KEY6_SRCAN	GND	ME3_KEY1_SRCAP	ME3_KEY1_SRCAN	GND	ME2_KEY5_SRCAP	ME2_KEY5_SRCAN	GND
2	OUT21_INAP	OUT21_INAN	GND	ME3_KEY6_FILAP	ME3_KEY6_FILAN	GND	ME3_KEY1_FILAP	ME3_KEY1_FILAN	GND	ME2_KEY5_FILAP	ME2_KEY5_FILAN	GND
3	OUT44_INAP	OUT44_INAN	GND	ME3_KEY5_SRCAP	ME3_KEY5_SRCAN	GND	ME4_KEY2_SRCAP	ME4_KEY2_SRCAN	GND	ME4_KEY6_SRCAP	ME4_KEY6_SRCAN	GND
4	OUT43_INAP	OUT43_INAN	GND	ME3_KEY5_FILAP	ME3_KEY5_FILAN	GND	ME4_KEY2_FILAP	ME4_KEY2_FILAN	GND	ME4_KEY6_FILAP	ME4_KEY6_FILAN	GND
5	OUT42_INAP	OUT42_INAN	GND	ME3_EXT_DMEAP	ME3_EXT_DMEAN	GND	ME4_KEY1_SRCAP	ME4_KEY1_SRCAN	GND	ME4_KEY5_SRCAP	ME4_KEY5_SRCAN	GND
6	OUT41_INAP	OUT41_INAN	GND	ME3_UTIL3AP	ME3_UTIL3AN	GND	ME4_KEY1_FILAP	ME4_KEY1_FILAN	GND	ME4_KEY5_FILAP	ME4_KEY5_FILAN	GND
7	OUT20_INAP	OUT20_INAN	GND	ME3_UTIL2AP	ME3_UTIL2AN	GND	ME5_EXT_DMEAP	ME5_EXT_DMEAN	GND	ME4_EXT_DMEAP	ME4_EXT_DMEAN	GND
8	OUT19_INAP	OUT19_INAN	GND	ME3_UTIL1AP	ME3_UTIL1AN	GND	ME5_UTIL3AP	ME5_UTIL3AN	GND	ME4_UTIL3AP	ME4_UTIL3AN	GND
9	OUT18_INAP	OUT18_INAN	GND	OUT39_INAP	OUT39_INAN	GND	ME5_UTIL2AP	ME5_UTIL2AN	GND	ME4_UTIL2AP	ME4_UTIL2AN	GND
10	OUT17_INAP	OUT17_INAN	GND	OUT38_INAP	OUT38_INAN	GND	ME5_UTIL1AP	ME5_UTIL1AN	GND	ME4_UTIL1AP	ME4_UTIL1AN	GND

CNK110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	INFC_OUT12P	INFC_OUT12N	GND	IN010P	IN010N	GND	IN005P	IN005N	GND	INFC_OUT04P	INFC_OUT04N	GND
2	INFC_OUT11P	INFC_OUT11N	GND	IN009P	IN009N	GND	IN004P	IN004N	GND	INFC_OUT03P	INFC_OUT03N	GND
3	INFC_OUT10P	INFC_OUT10N	GND	IN008P	IN008N	GND	IN003P	IN003N	GND	INFC_OUT02P	INFC_OUT02N	GND
4	INFC_OUT09P	INFC_OUT09N	GND	IN007P	IN007N	GND	IN002P	IN002N	GND	INFC_OUT01P	INFC_OUT01N	GND
5	FMOUT6P	FMOUT6N	GND	IN006P	IN006N	GND	IN001P	IN001N	GND	ME4_OUT4P	ME4_OUT4N	GND
6	FMOUT5P	FMOUT5N	GND	IN030P	IN030N	GND	IN025P	IN025N	GND	ME4_OUT3P	ME4_OUT3N	GND
7	FMOUT4P	FMOUT4N	GND	IN029P	IN029N	GND	IN024P	IN024N	GND	ME4_OUT2P	ME4_OUT2N	GND
8	FMOUT3P	FMOUT3N	GND	IN028P	IN028N	GND	IN023P	IN023N	GND	ME4_OUT1P	ME4_OUT1N	GND
9	FMOUT2P	FMOUT2N	GND	IN027P	IN027N	GND	IN022P	IN022N	GND	ME3_OUT4P	ME3_OUT4N	GND
10	FMOUT1P	FMOUT1N	GND	IN026P	IN026N	GND	IN021P	IN021N	GND	ME3_OUT3P	ME3_OUT3N	GND

CNL110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	FMOUT0P	FMOUT0N	GND	IN050P	IN050N	GND	IN045P	IN045N	GND	ME3_OUT2P	ME3_OUT2N	GND
2	FMOUT9P	FMOUT9N	GND	IN049P	IN049N	GND	IN044P	IN044N	GND	ME3_OUT1P	ME3_OUT1N	GND
3	FMOUT8P	FMOUT8N	GND	IN048P	IN048N	GND	IN043P	IN043N	GND	ME2_OUT4P	ME2_OUT4N	GND
4	FMOUT7P	FMOUT7N	GND	IN047P	IN047N	GND	IN042P	IN042N	GND	ME2_OUT3P	ME2_OUT3N	GND
5	FMOUT6P	FMOUT6N	GND	IN046P	IN046N	GND	IN041P	IN041N	GND	ME2_OUT2P	ME2_OUT2N	GND
6	FMOUT5P	FMOUT5N	GND	IN070P	IN070N	GND	IN065P	IN065N	GND	ME2_OUT1P	ME2_OUT1N	GND
7	FMOUT4P	FMOUT4N	GND	IN069P	IN069N	GND	IN064P	IN064N	GND	ME1_OUT4P	ME1_OUT4N	GND
8	FMOUT3P	FMOUT3N	GND	IN068P	IN068N	GND	IN063P	IN063N	GND	ME1_OUT3P	ME1_OUT3N	GND
9	FMOUT2P	FMOUT2N	GND	IN067P	IN067N	GND	IN062P	IN062N	GND	ME1_OUT2P	ME1_OUT2N	GND
10	FMOUT1P	FMOUT1N	GND	IN066P	IN066N	GND	IN061P	IN061N	GND	ME1_OUT1P	ME1_OUT1N	GND

CNP110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT13_INAP	OUT13_INAN	GND	ME1_DMEKAP	ME1_DMEKAN	GND	ME3_KEY4_SRCAP	ME3_KEY4_SRCAN	GND	ME3_DMEKAP	ME3_DMEKAN	GND
2	OUT12_INAP	OUT12_INAN	GND	ME1_DMEVAP	ME1_DMEVAN	GND	ME3_KEY4_FILAP	ME3_KEY4_FILAN	GND	ME3_DMEVAP	ME3_DMEVAN	GND
3	OUT11_INAP	OUT11_INAN	GND	ME1_BKGDBAP	ME1_BKGDBAN	GND	ME3_KEY3_SRCAP	ME3_KEY3_SRCAN	GND	ME3_BKGDBAP	ME3_BKGDBAN	GND
4	OUT10_INAP	OUT10_INAN	GND	ME1_BKGDAAP	ME1_BKGDAAN	GND	ME3_KEY3_FILAP	ME3_KEY3_FILAN	GND	ME3_BKGDAAP	ME3_BKGDAAN	GND
5	OUT09_INAP	OUT09_INAN	GND	OUT08_INAP	OUT08_INAN	GND	ME1_KEY8_SRCAP	ME1_KEY8_SRCAN	GND	ME1_KEY4_SRCAP	ME1_KEY4_SRCAN	GND
6	OUT37_INAP	OUT37_INAN	GND	OUT07_INAP	OUT07_INAN	GND	ME2_KEY8_SRCAP	ME2_KEY8_SRCAN	GND	ME2_KEY4_SRCAP	ME2_KEY4_SRCAN	GND
7	OUT36_INAP	OUT36_INAN	GND	OUT06_INAP	OUT06_INAN	GND	ME1_KEY8_FILAP	ME1_KEY8_FILAN	GND	ME1_KEY4_FILAP	ME1_KEY4_FILAN	GND
8	OUT35_INAP	OUT35_INAN	GND	OUT05_INAP	OUT05_INAN	GND	ME2_KEY8_FILAP	ME2_KEY8_FILAN	GND	ME2_KEY4_FILAP	ME2_KEY4_FILAN	GND
9	OUT34_INAP	OUT34_INAN	GND	OUT04_INAP	OUT04_INAN	GND	ME1_KEY7_SRCAP	ME1_KEY7_SRCAN	GND	ME1_KEY3_SRCAP	ME1_KEY3_SRCAN	GND
10	OUT33_INAP	OUT33_INAN	GND	OUT03_INAP	OUT03_INAN	GND	ME2_KEY7_SRCAP	ME2_KEY7_SRCAN	GND	ME2_KEY3_SRCAP	ME2_KEY3_SRCAN	GND

CNR110

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT32_INAP	OUT32_INAN	GND	OUT02_INAP	OUT02_INAN	GND	ME1_KEY7_FILAP	ME1_KEY7_FILAN	GND	ME1_KEY3_FILAP	ME1_KEY3_FILAN	GND
2	OUT31_INAP	OUT31_INAN	GND	OUT01_INAP	OUT01_INAN	GND	ME2_KEY7_FILAP	ME2_KEY7_FILAN	GND	ME2_KEY3_FILAP	ME2_KEY3_FILAN	GND
3	OUT30_INAP	OUT30_INAN	GND	ME4_DMEKAP	ME4_DMEKAN	GND	ME4_KEY8_SRCAP	ME4_KEY8_SRCAN	GND	ME4_KEY4_SRCAP	ME4_KEY4_SRCAN	GND
4	OUT29_INAP	OUT29_INAN	GND	ME4_DMEVAP	ME4_DMEVAN	GND	ME4_KEY8_FILAP	ME4_KEY8_FILAN	GND	ME4_KEY4_FILAP	ME4_KEY4_FILAN	GND
5	FM_IN2AP	FM_IN2AN	GND	ME4_BKGDBAP	ME4_BKGDBAN	GND	ME4_KEY7_SRCAP	ME4_KEY7_SRCAN	GND	ME4_KEY3_SRCAP	ME4_KEY3_SRCAN	GND
6	OUT28_INAP	OUT28_INAN	GND	ME4_BKGDAAP	ME4_BKGDAAN	GND	ME4_KEY7_FILAP	ME4_KEY7_FILAN	GND	ME4_KEY3_FILAP	ME4_KEY3_FILAN	GND
7	OUT27_INAP	OUT27_INAN	GND	ME2_DMEKAP	ME2_DMEKAN	GND	ME3_KEY8_SRCAP	ME3_KEY8_SRCAN	GND	ME5_DMEKAP	ME5_DMEKAN	GND
8	OUT26_INAP	OUT26_INAN	GND	ME2_DMEVAP	ME2_DMEVAN	GND	ME3_KEY8_FILAP	ME3_KEY8_FILAN	GND	ME5_DMEVAP	ME5_DMEVAN	GND
9	OUT25_INAP	OUT25_INAN	GND	ME2_BKGDBAP	ME2_BKGDBAN	GND	ME3_KEY7_SRCAP	ME3_KEY7_SRCAN	GND	ME5_BKGDBAP	ME5_BKGDBAN	GND
10	FM_IN1AP	FM_IN1AN	GND	ME2_BKGDAAP	ME2_BKGDAAN	GND	ME3_KEY7_FILAP	ME3_KEY7_FILAN	GND	ME5_BKGDAAP	ME5_BKGDAAN	GND

Rear CNI-37

CNA210

	A	B	BG	C	D	DG
1	FD5P	FD5N	GND	VD5P	VD5N	GND
2	VCLK4P	VCLK4N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_9F	BD_EXT_9R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
6	RESET0	DC_ENBL0	GND	GND (※X for CN1)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF210

	A	B	BG	C	D	DG
1			GND	IN111P	IN111N	GND
2			GND	IN112P	IN112N	GND
3			GND	IN113P	IN113N	GND
4			GND	IN114P	IN114N	GND
5			GND	IN115P	IN115N	GND
6			GND	IN116P	IN116N	GND
7			GND	IN117P	IN117N	GND
8			GND	IN118P	IN118N	GND
9			GND	IN119P	IN119N	GND
10			GND	IN120P	IN120N	GND

CNN210

	A	B	BG	C	D	DG
1			GND	IN101P	IN101N	GND
2			GND	IN102P	IN102N	GND
3			GND	IN103P	IN103N	GND
4			GND	IN104P	IN104N	GND
5			GND	IN105P	IN105N	GND
6			GND	IN106P	IN106N	GND
7			GND	IN107P	IN107N	GND
8			GND	IN108P	IN108N	GND
9			GND	IN109P	IN109N	GND
10			GND	IN110P	IN110N	GND

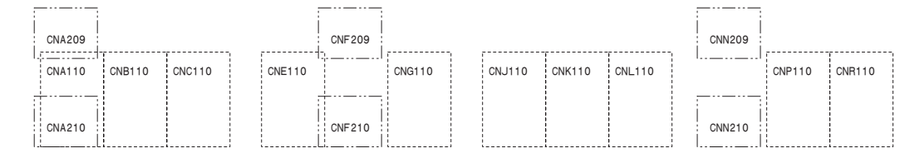

MB-1150 (10/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_10

MB-1150 (11/20)
SUFFIX: -11

Front FC-112

CNA111

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	GND (FOR CN1)	FUSE+12V	GND
6	BD_EXT_10F	BD_EXT_10R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
7	(SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK6P	VCLK6N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
10	FD0P	FD0N	GND	VD0P	VD0N	GND

CNB111

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK3p	XPT_CLK3n	GND	XPT_CS3An	XPT_CS3Bn	GND
10	XPT_WE3n	XPT_WAIT3n	GND	XPT_OEn	XPT_RESET1n	GND

CNE111

	A	B	BG	C	D	DG
1			GND			GND
2			GND	FC_IN08P	FC_IN08N	GND
3	INFC_OUT08P	INFC_OUT08N	GND			GND
4			GND	FC_IN07P	FC_IN07N	GND
5	INFC_OUT07P	INFC_OUT07N	GND			GND
6			GND	FC_IN06P	FC_IN06N	GND
7	INFC_OUT06P	INFC_OUT06N	GND			GND
8			GND	FC_IN05P	FC_IN05N	GND
9	INFC_OUT05P	INFC_OUT05N	GND			GND
10			GND			GND

CNL111

	A	B	BG	C	D	DG
1			GND			GND
2			GND	FC_IN04P	FC_IN04N	GND
3	INFC_OUT04P	INFC_OUT04N	GND			GND
4			GND	FC_IN03P	FC_IN03N	GND
5	INFC_OUT03P	INFC_OUT03N	GND			GND
6			GND	FC_IN02P	FC_IN02N	GND
7	INFC_OUT02P	INFC_OUT02N	GND			GND
8			GND	FC_IN01P	FC_IN01N	GND
9	INFC_OUT01P	INFC_OUT01N	GND			GND
10			GND			GND

Rear CNI-37

CNA211

	A	B	BG	C	D	DG
1	FD0P	FD0N	GND	VD0P	VD0N	GND
2	VCLK6P	VCLK6N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_10F	BD_EXT_10R	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND
6	RESET0	DC_ENBL0	GND	GND (FOR CN1)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF211

	A	B	BG	C	D	DG
1			GND	IN131P	IN131N	GND
2			GND	IN132P	IN132N	GND
3			GND	IN133P	IN133N	GND
4			GND	IN134P	IN134N	GND
5			GND	IN135P	IN135N	GND
6			GND	IN136P	IN136N	GND
7			GND	IN137P	IN137N	GND
8			GND	IN138P	IN138N	GND
9			GND	IN139P	IN139N	GND
10			GND	IN140P	IN140N	GND

CNN211

	A	B	BG	C	D	DG
1			GND	IN121P	IN121N	GND
2			GND	IN122P	IN122N	GND
3			GND	IN123P	IN123N	GND
4			GND	IN124P	IN124N	GND
5			GND	IN125P	IN125N	GND
6			GND	IN126P	IN126N	GND
7			GND	IN127P	IN127N	GND
8			GND	IN128P	IN128N	GND
9			GND	IN129P	IN129N	GND
10			GND	IN130P	IN130N	GND

MB-1150 (11/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_11

MB-1150 (12/20)
SUFFIX: -11

Front FC-112

CNA112

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	GND (=X for CNI)	FUSE+12V	GND
6	BD_EXT_11F	BD_EXT_11R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
7	GND (SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK8P	VCLK8N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
10	FD1P	FD1N	GND	VD1P	VD1N	GND

CNB112

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK2p	XPT_CLK2n	GND	XPT_CS2An	XPT_CS2Bn	GND
10	XPT_WE2n	XPT_WAIT2n	GND	XPT_OEn	XPT_RESET1n	GND

CNE112

	A	B	BG	C	D	DG
1			GND			GND
2			GND	FC_IN16P	FC_IN16N	GND
3	INFC_OUT16P	INFC_OUT16N	GND			GND
4			GND	FC_IN15P	FC_IN15N	GND
5	INFC_OUT15P	INFC_OUT15N	GND			GND
6			GND	FC_IN14P	FC_IN14N	GND
7	INFC_OUT14P	INFC_OUT14N	GND			GND
8			GND	FC_IN13P	FC_IN13N	GND
9	INFC_OUT13P	INFC_OUT13N	GND			GND
10			GND			GND

CNL112

	A	B	BG	C	D	DG
1			GND			GND
2			GND	FC_IN12P	FC_IN12N	GND
3	INFC_OUT12P	INFC_OUT12N	GND			GND
4			GND	FC_IN11P	FC_IN11N	GND
5	INFC_OUT11P	INFC_OUT11N	GND			GND
6			GND	FC_IN10P	FC_IN10N	GND
7	INFC_OUT10P	INFC_OUT10N	GND			GND
8			GND	FC_IN09P	FC_IN09N	GND
9	INFC_OUT09P	INFC_OUT09N	GND			GND
10			GND			GND

Rear CNI-37A

CNA212

	A	B	BG	C	D	DG
1	FD1P	FD1N	GND	VD1P	VD1N	GND
2	VCLK8P	VCLK8N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_11F	BD_EXT_11R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	RESET0	DC_ENBL0	GND	GND (=X for CNI)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF212

	A	B	BG	C	D	DG
1			GND	FC_IN11P	FC_IN11N	GND
2			GND	FC_IN12P	FC_IN12N	GND
3			GND	FC_IN13P	FC_IN13N	GND
4			GND	FC_IN14P	FC_IN14N	GND
5			GND	FC_IN15P	FC_IN15N	GND
6			GND	FC_IN16P	FC_IN16N	GND
7			GND	IN141P	IN141N	GND
8			GND	IN142P	IN142N	GND
9			GND	IN143P	IN143N	GND
10			GND	IN144P	IN144N	GND

CNN212

	A	B	BG	C	D	DG
1			GND	FC_IN01P	FC_IN01N	GND
2			GND	FC_IN02P	FC_IN02N	GND
3			GND	FC_IN03P	FC_IN03N	GND
4			GND	FC_IN04P	FC_IN04N	GND
5			GND	FC_IN05P	FC_IN05N	GND
6			GND	FC_IN06P	FC_IN06N	GND
7			GND	FC_IN07P	FC_IN07N	GND
8			GND	FC_IN08P	FC_IN08N	GND
9			GND	FC_IN09P	FC_IN09N	GND
10			GND	FC_IN10P	FC_IN10N	GND

MB-1150 (12/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_12

4-162

MB-1150 (13/20)
SUFFIX: -11

Front OUT-35

CNA113

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	SD-HD0	FUSE+12V	GND
6	BD_EXT_12F	BD_EXT_12R	GND	SD-HD0	SD-HD0	GND
7	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK10P	VCLK10N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
10	FD3P	FD3N	GND	VD3P	VD3N	GND

CNB113

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK1p	XPT_CLK1n	GND	XPT_CS1An	XPT_CS1Bn	GND
10	XPT_WE1n	XPT_WAIT1n	GND	XPT_OEn	XPT_RESET0n	GND

CNC113

	A	B	BG	C	D	DG
1			GND	CCR_IN4BP	CCR_IN4BN	GND
2	CCR_OUT4P	CCR_OUT4N	GND	CCR_IN4AP	CCR_IN4AN	GND
3			GND	CCR_IN3BP	CCR_IN3BN	GND
4	CCR_OUT3P	CCR_OUT3N	GND	CCR_IN3AP	CCR_IN3AN	GND
5			GND	CCR_IN2BP	CCR_IN2BN	GND
6	CCR_OUT2P	CCR_OUT2N	GND	CCR_IN2AP	CCR_IN2AN	GND
7			GND	CCR_IN1BP	CCR_IN1BN	GND
8	CCR_OUT1P	CCR_OUT1N	GND	CCR_IN1AP	CCR_IN1AN	GND
9			GND			GND
10			GND			GND

CNE113

	A	B	BG	C	D	DG
1	OUT24BP	OUT24BN	GND	OUT24_INBP	OUT24_INBN	GND
2	OUT24AP	OUT24AN	GND	OUT24_INAP	OUT24_INAN	GND
3			GND			GND
4	OUT23BP	OUT23BN	GND	OUT23_INBP	OUT23_INBN	GND
5	OUT23AP	OUT23AN	GND	OUT23_INAP	OUT23_INAN	GND
6	OUT22BP(	)OUT22BN(	GND	OUT22_INBP	OUT22_INBN	GND
7	OUT22AP	OUT22AN	GND	OUT22_INAP	OUT22_INAN	GND
8			GND			GND
9	OUT21BP(	)OUT21BN(	GND	OUT21_INBP	OUT21_INBN	GND
10	OUT21AP	OUT21AN	GND	OUT21_INAP	OUT21_INAN	GND

CNG113

	A	B	BG	C	D	DG
1	OUT20BP(	)OUT20BN(	GND	OUT20_INBP	OUT20_INBN	GND
2	OUT20AP	OUT20AN	GND	OUT20_INAP	OUT20_INAN	GND
3	OUT19BP(	)OUT19BN(	GND	OUT19_INBP	OUT19_INBN	GND
4	OUT19AP	OUT19AN	GND	OUT19_INAP	OUT19_INAN	GND
5	OUT18BP(	)OUT18BN(	GND	OUT18_INBP	OUT18_INBN	GND
6	OUT18AP	OUT18AN	GND	OUT18_INAP	OUT18_INAN	GND
7	OUT17BP(	)OUT17BN(	GND	OUT17_INBP	OUT17_INBN	GND
8	OUT17AP	OUT17AN	GND	OUT17_INAP	OUT17_INAN	GND
9	MSD_OUT1BP	MSD_OUT1BN	GND			GND
10	MSD_OUT1AP	MSD_OUT1AN	GND			GND

CNK113

	A	B	BG	C	D	DG
1	OUT16BP(	)OUT16BN(	GND	OUT16_INBP	OUT16_INBN	GND
2	OUT16AP	OUT16AN	GND	OUT16_INAP	OUT16_INAN	GND
3			GND			GND
4	OUT15BP(	)OUT15BN(	GND	OUT15_INBP	OUT15_INBN	GND
5	OUT15AP	OUT15AN	GND	OUT15_INAP	OUT15_INAN	GND
6	OUT14BP(	)OUT14BN(	GND	OUT14_INBP	OUT14_INBN	GND
7	OUT14AP	OUT14AN	GND	OUT14_INAP	OUT14_INAN	GND
8			GND			GND
9	OUT13BP(	)OUT13BN(	GND	OUT13_INBP	OUT13_INBN	GND
10	OUT13AP	OUT13AN	GND	OUT13_INAP	OUT13_INAN	GND

CNL113

	A	B	BG	C	D	DG
1	OUT12BP(	)OUT12BN(	GND	OUT12_INBP	OUT12_INBN	GND
2	OUT12AP	OUT12AN	GND	OUT12_INAP	OUT12_INAN	GND
3			GND			GND
4	OUT11BP(	)OUT11BN(	GND	OUT11_INBP	OUT11_INBN	GND
5	OUT11AP	OUT11AN	GND	OUT11_INAP	OUT11_INAN	GND
6	OUT10BP(	)OUT10BN(	GND	OUT10_INBP	OUT10_INBN	GND
7	OUT10AP	OUT10AN	GND	OUT10_INAP	OUT10_INAN	GND
8			GND			GND
9	OUT09BP(	)OUT09BN(	GND	OUT09_INBP	OUT09_INBN	GND
10	OUT09AP	OUT09AN	GND	OUT09_INAP	OUT09_INAN	GND

CNP113

	A	B	BG	C	D	DG
1	OUT08BP(	)OUT08BN(	GND	OUT08_INBP	OUT08_INBN	GND
2	OUT08AP	OUT08AN	GND	OUT08_INAP	OUT08_INAN	GND
3			GND			GND
4	OUT07BP(	)OUT07BN(	GND	OUT07_INBP	OUT07_INBN	GND
5	OUT07AP	OUT07AN	GND	OUT07_INAP	OUT07_INAN	GND
6	OUT06BP(	)OUT06BN(	GND	OUT06_INBP	OUT06_INBN	GND
7	OUT06AP	OUT06AN	GND	OUT06_INAP	OUT06_INAN	GND
8			GND			GND
9	OUT05BP(	)OUT05BN(	GND	OUT05_INBP	OUT05_INBN	GND
10	OUT05AP	OUT05AN	GND	OUT05_INAP	OUT05_INAN	GND

CNR113

	A	B	BG	C	D	DG
1	OUT04BP(	)OUT04BN(	GND	OUT04_INBP	OUT04_INBN	GND
2	OUT04AP	OUT04AN	GND	OUT04_INAP	OUT04_INAN	GND
3	OUT03BP(	)OUT03BN(	GND	OUT03_INBP	OUT03_INBN	GND
4	OUT03AP	OUT03AN	GND	OUT03_INAP	OUT03_INAN	GND
5	OUT02BP(	)OUT02BN(	GND	OUT02_INBP	OUT02_INBN	GND
6	OUT02AP	OUT02AN	GND	OUT02_INAP	OUT02_INAN	GND
7	OUT01BP(	)OUT01BN(	GND	OUT01_INBP	OUT01_INBN	GND
8	OUT01AP	OUT01AN	GND	OUT01_INAP	OUT01_INAN	GND
9	FC_OUT2P	FC_OUT2N	GND			GND
10	FC_OUT1P	FC_OUT1N	GND			GND

Rear CNO-38

CNA213

	A	B	BG	C	D	DG
1	FD3P	FD3N	GND	VD3P	VD3N	GND
2	VCLK10P	VCLK10N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_12F	BD_EXT_12R	GND	SD-HD0	SD-HD0	GND
6	RESET0	DC_ENBL0	GND	SD-HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF213

	A	B	BG	C	D	DG
1			GND	OUT11AP	OUT11AN	GND
2			GND	OUT12AP	OUT12AN	GND
3			GND	OUT13AP	OUT13AN	GND
4			GND	OUT14AP	OUT14AN	GND
5			GND	OUT15AP	OUT15AN	GND
6			GND	OUT16AP	OUT16AN	GND
7			GND	OUT17AP	OUT17AN	GND
8			GND	OUT18AP	OUT18AN	GND
9			GND	OUT19AP	OUT19AN	GND
10			GND	OUT20AP	OUT20AN	GND

CNN213

	A	B	BG	C	D	DG
1			GND	OUT01AP	OUT01AN	GND
2			GND	OUT02AP	OUT02AN	GND
3			GND	OUT03AP	OUT03AN	GND
4			GND	OUT04AP	OUT04AN	GND
5			GND	OUT05AP	OUT05AN	GND
6			GND	OUT06AP	OUT06AN	GND
7			GND	OUT07AP	OUT07AN	GND
8			GND	OUT08AP	OUT08AN	GND
9			GND	OUT09AP	OUT09AN	GND
10			GND	OUT10AP	OUT10AN	GND

CNA113	CNB113	CNC113	CNE113	CNF213	CNG113	CNK113	CNL113	CNN213	CNP113	CNR113
CNA213										

MB-1150 (13/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_13

Front OUT-35A

CNA114

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	SD-/HD0	FUSE+12V	GND
6	BD_EXT_13F	BD_EXT_13R	GND	SD-/HD0	SD-/HD0	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK12P	VCLK12N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
10	FD2P	FD2N	GND	VD2P	VD2N	GND

CNB114

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK0p	XPT_CLK0n	GND	XPT_CS0An	XPT_CS0Bn	GND
10	XPT_WE0n	XPT_WAIT0n	GND	XPT_OEn	XPT_RESET0n	GND

CNC114

	A	B	BG	C	D	DG
1			GND	ICCR_IN4BP)	ICCR_IN4BN)	GND
2	ICCR_OUT4P)	ICCR_OUT4N)	GND	CCR_IN4AP)	ICCR_IN4AN)	GND
3			GND	CCR_IN3BP)	ICCR_IN3BN)	GND
4	ICCR_OUT3P)	ICCR_OUT3N)	GND	CCR_IN3AP)	ICCR_IN3AN)	GND
5			GND	CCR_IN2BP)	ICCR_IN2BN)	GND
6	ICCR_OUT2P)	ICCR_OUT2N)	GND	CCR_IN2AP)	ICCR_IN2AN)	GND
7			GND	CCR_IN1BP)	ICCR_IN1BN)	GND
8	ICCR_OUT1P)	ICCR_OUT1N)	GND	CCR_IN1AP)	ICCR_IN1AN)	GND
9			GND			GND
10			GND			GND

CNE114

	A	B	BG	C	D	DG
1	OUT48BP	OUT48BN	GND	OUT48_INBP	OUT48_INBN	GND
2	OUT48AP	OUT48AN	GND	OUT48_INAP	OUT48_INAN	GND
3			GND			GND
4	OUT47BP	OUT47BN	GND	OUT47_INBP	OUT47_INBN	GND
5	OUT47AP	OUT47AN	GND	OUT47_INAP	OUT47_INAN	GND
6	IOUT46BP)	IOUT46BN)	GND	OUT46_INBP	OUT46_INBN	GND
7	OUT46AP	OUT46AN	GND	OUT46_INAP	OUT46_INAN	GND
8			GND			GND
9	IOUT45BP)	IOUT45BN)	GND	OUT45_INBP	OUT45_INBN	GND
10	OUT45AP	OUT45AN	GND	OUT45_INAP	OUT45_INAN	GND

CNG114

	A	B	BG	C	D	DG
1	IOUT44BP)	IOUT44BN)	GND	OUT44_INBP	OUT44_INBN	GND
2	OUT44AP	OUT44AN	GND	OUT44_INAP	OUT44_INAN	GND
3	IOUT43BP)	IOUT43BN)	GND	OUT43_INBP	OUT43_INBN	GND
4	OUT43AP	OUT43AN	GND	OUT43_INAP	OUT43_INAN	GND
5	IOUT42BP)	IOUT42BN)	GND	OUT42_INBP	OUT42_INBN	GND
6	OUT42AP	OUT42AN	GND	OUT42_INAP	OUT42_INAN	GND
7	IOUT41BP)	IOUT41BN)	GND	OUT41_INBP	OUT41_INBN	GND
8	OUT41AP	OUT41AN	GND	OUT41_INAP	OUT41_INAN	GND
9	MSD_OUT2BP	MSD_OUT2BN	GND			GND
10	MSD_OUT2AP	MSD_OUT2AN	GND			GND

CNK114

	A	B	BG	C	D	DG
1	IOUT40BP)	IOUT40BN)	GND	OUT40_INBP	OUT40_INBN	GND
2	OUT40AP	OUT40AN	GND	OUT40_INAP	OUT40_INAN	GND
3			GND			GND
4	IOUT39BP)	IOUT39BN)	GND	OUT39_INBP	OUT39_INBN	GND
5	OUT39AP	OUT39AN	GND	OUT39_INAP	OUT39_INAN	GND
6	IOUT38BP)	IOUT38BN)	GND	OUT38_INBP	OUT38_INBN	GND
7	OUT38AP	OUT38AN	GND	OUT38_INAP	OUT38_INAN	GND
8			GND			GND
9	IOUT37BP)	IOUT37BN)	GND	OUT37_INBP	OUT37_INBN	GND
10	OUT37AP	OUT37AN	GND	OUT37_INAP	OUT37_INAN	GND

CNL114

	A	B	BG	C	D	DG
1	IOUT36BP)	IOUT36BN)	GND	OUT36_INBP	OUT36_INBN	GND
2	OUT36AP	OUT36AN	GND	OUT36_INAP	OUT36_INAN	GND
3			GND			GND
4	IOUT35BP)	IOUT35BN)	GND	OUT35_INBP	OUT35_INBN	GND
5	OUT35AP	OUT35AN	GND	OUT35_INAP	OUT35_INAN	GND
6	IOUT34BP)	IOUT34BN)	GND	OUT34_INBP	OUT34_INBN	GND
7	OUT34AP	OUT34AN	GND	OUT34_INAP	OUT34_INAN	GND
8			GND			GND
9	IOUT33BP)	IOUT33BN)	GND	OUT33_INBP	OUT33_INBN	GND
10	OUT33AP	OUT33AN	GND	OUT33_INAP	OUT33_INAN	GND

CNP114

	A	B	BG	C	D	DG
1	IOUT32BP)	IOUT32BN)	GND	OUT32_INBP	OUT32_INBN	GND
2	OUT32AP	OUT32AN	GND	OUT32_INAP	OUT32_INAN	GND
3			GND			GND
4	IOUT31BP)	IOUT31BN)	GND	OUT31_INBP	OUT31_INBN	GND
5	OUT31AP	OUT31AN	GND	OUT31_INAP	OUT31_INAN	GND
6	IOUT30BP)	IOUT30BN)	GND	OUT30_INBP	OUT30_INBN	GND
7	OUT30AP	OUT30AN	GND	OUT30_INAP	OUT30_INAN	GND
8			GND			GND
9	IOUT29BP)	IOUT29BN)	GND	OUT29_INBP	OUT29_INBN	GND
10	OUT29AP	OUT29AN	GND	OUT29_INAP	OUT29_INAN	GND

CNR114

	A	B	BG	C	D	DG
1	IOUT28BP)	IOUT28BN)	GND	OUT28_INBP	OUT28_INBN	GND
2	OUT28AP	OUT28AN	GND	OUT28_INAP	OUT28_INAN	GND
3	IOUT27BP)	IOUT27BN)	GND	OUT27_INBP	OUT27_INBN	GND
4	OUT27AP	OUT27AN	GND	OUT27_INAP	OUT27_INAN	GND
5	IOUT26BP)	IOUT26BN)	GND	OUT26_INBP	OUT26_INBN	GND
6	OUT26AP	OUT26AN	GND	OUT26_INAP	OUT26_INAN	GND
7	IOUT25BP)	IOUT25BN)	GND	OUT25_INBP	OUT25_INBN	GND
8	OUT25AP	OUT25AN	GND	OUT25_INAP	OUT25_INAN	GND
9	FC_OUT4P	FC_OUT4N	GND			GND
10	FC_OUT3P	FC_OUT3N	GND			GND

Rear CNO-38

CNA214

	A	B	BG	C	D	DG
1	FD2P	FD2N	GND	VD2P	VD2N	GND
2	VCLK12P	VCLK12N	GND	XPT_I2C_SCL_0	XPT_I2C_SDA_0	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_13F	BD_EXT_13R	GND	SD-/HD0	SD-/HD0	GND
6	RESET0	DC_ENBL0	GND	SD-/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF214

	A	B	BG	C	D	DG
1			GND	OUT35AP	OUT35AN	GND
2			GND	OUT36AP	OUT36AN	GND
3			GND	OUT37AP	OUT37AN	GND
4			GND	OUT38AP	OUT38AN	GND
5			GND	OUT39AP	OUT39AN	GND
6			GND	OUT40AP	OUT40AN	GND
7			GND	OUT41AP	OUT41AN	GND
8			GND	OUT42AP	OUT42AN	GND
9			GND	OUT43AP	OUT43AN	GND
10			GND	OUT44AP	OUT44AN	GND

CNN214

	A	B	BG	C	D	DG
1			GND	OUT25AP	OUT25AN	GND
2			GND	OUT26AP	OUT26AN	GND
3			GND	OUT27AP	OUT27AN	GND
4			GND	OUT28AP	OUT28AN	GND
5			GND	OUT29AP	OUT29AN	GND
6			GND	OUT30AP	OUT30AN	GND
7			GND	OUT31AP	OUT31AN	GND
8			GND	OUT32AP	OUT32AN	GND
9			GND	OUT33AP	OUT33AN	GND
10			GND	OUT34AP	OUT34AN	GND

MB-1150 (14/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_14

MB-1150 (15/20)
SUFFIX: -11

Front ---

Rear CNO-38B

CNA215

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_14F	BD_EXT_14R	GND	SD/HD1	SD/HD2	GND
6			GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF215

	A	B	BG	C	D	DG
1			GND	OUT23AP	OUT23AN	GND
2			GND	OUT23BP	OUT23BN	GND
3			GND	OUT24AP	OUT24AN	GND
4			GND	OUT24BP	OUT24BN	GND
5			GND	OUT45AP	OUT45AN	GND
6			GND	OUT46AP	OUT46AN	GND
7			GND	OUT47AP	OUT47AN	GND
8			GND	OUT47BP	OUT47BN	GND
9			GND	OUT48AP	OUT48AN	GND
10			GND	OUT48BP	OUT48BN	GND

CNN215

	A	B	BG	C	D	DG
1			GND	FC_OUT1P	FC_OUT1N	GND
2			GND	FC_OUT2P	FC_OUT2N	GND
3			GND	FC_OUT3P	FC_OUT3N	GND
4			GND	FC_OUT4P	FC_OUT4N	GND
5			GND	MSD_OUT1AP	MSD_OUT1AN	GND
6			GND	MSD_OUT1BP	MSD_OUT1BN	GND
7			GND	MSD_OUT2AP	MSD_OUT2AN	GND
8			GND	MSD_OUT2BP	MSD_OUT2BN	GND
9			GND	OUT21AP	OUT21AN	GND
10			GND	OUT22AP	OUT22AN	GND

CNA215

CNF215

CNN215

MB-1150 (15/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_15

4-165

MB-1150 (16/20)
SUFFIX: -11

Front MY-118

CNA116

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET1	DC_ENBL1	GND		FUSE+12V	GND
6	BD_EXT_15F	BD_EXT_15R	GND			GND
7	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNB116

	A	B	BG	C	D	DG
1	VCLK3P	VCLK3N	GND			GND
2	FD4P	FD4N	GND	VD4P	VD4N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
7	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNG116

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5	FM_USBP	FM_USBN	GND			GND
6			GND			GND
7	FM_MTAP	FM_MTAN	GND	FM_MTBP	FM_MTBN	GND
8			GND			GND
9	FM_GBE_TRX2P	FM_GBE_TRX2N	GND	FM_GBE_TRX3P	FM_GBE_TRX3N	GND
10	FM_GBE_TRX0P	FM_GBE_TRX0N	GND	FM_GBE_TRX1P	FM_GBE_TRX1N	GND

CNL116

	A	B	BG	C	D	DG
1	AESOUT6P	AESOUT6N	GND	AESOUT8P	AESOUT8N	GND
2	AESOUT5P	AESOUT5N	GND	AESOUT7P	AESOUT7N	GND
3	FMOUT16P	FMOUT16N	GND			GND
4	FMOUT15P	FMOUT15N	GND			GND
5	FMOUT14P	FMOUT14N	GND			GND
6	FMOUT13P	FMOUT13N	GND			GND
7	FMOUT12P	FMOUT12N	GND			GND
8	FMOUT11P	FMOUT11N	GND			GND
9	FMOUT10P	FMOUT10N	GND	FM_IN2BP	FM_IN2BN	GND
10	FMOUT9P	FMOUT9N	GND	FM_IN2AP	FM_IN2AN	GND

CNR116

	A	B	BG	C	D	DG
1	AESOUT2P	AESOUT2N	GND	AESOUT4P	AESOUT4N	GND
2	AESOUT1P	AESOUT1N	GND	AESOUT3P	AESOUT3N	GND
3	FMOUT8P	FMOUT8N	GND			GND
4	FMOUT7P	FMOUT7N	GND			GND
5	FMOUT6P	FMOUT6N	GND			GND
6	FMOUT5P	FMOUT5N	GND			GND
7	FMOUT4P	FMOUT4N	GND			GND
8	FMOUT3P	FMOUT3N	GND			GND
9	FMOUT2P	FMOUT2N	GND	FM_IN1BP	FM_IN1BN	GND
10	FMOUT1P	FMOUT1N	GND	FM_IN1AP	FM_IN1AN	GND

Rear CN-3235

CNA216

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	(SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_15F	BD_EXT_15R	GND			GND
6	RESET1	DC_ENBL1	GND		FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF216

	A	B	BG	C	D	DG
1	FM_GBE_TRX0P	FM_GBE_TRX0N	GND	FM_GBE_TRX1P	FM_GBE_TRX1N	GND
2	FM_GBE_TRX2P	FM_GBE_TRX2N	GND	FM_GBE_TRX3P	FM_GBE_TRX3N	GND
3			GND			GND
4	FM_MTAP	FM_MTAN	GND	FM_MTBP	FM_MTBN	GND
5			GND			GND
6	FM_USBP	FM_USBN	GND			GND
7			GND			GND
8			GND			GND
9			GND			GND
10			GND			GND

CNN216

	A	B	BG	C	D	DG
1			GND			GND
2	AESOUT1P	AESOUT1N	GND			GND
3	AESOUT2P	AESOUT2N	GND			GND
4	AESOUT3P	AESOUT3N	GND			GND
5	AESOUT4P	AESOUT4N	GND			GND
6	AESOUT5P	AESOUT5N	GND			GND
7	AESOUT6P	AESOUT6N	GND			GND
8	AESOUT7P	AESOUT7N	GND			GND
9	AESOUT8P	AESOUT8N	GND			GND
10			GND			GND

MB-1150 (16/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_16

4-166

MB-1150 (17/20)
SUFFIX: -11

Front RESERVE

CNA117

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND		FUSE+12V	GND
6	BD_EXT_16F	BD_EXT_16R	GND			GND
7	(SLOT_No.0)	GND (SLOT_No.1)	GND	GND (SLOT_No.2)	GND (SLOT_No.3)	GND
8	(SLOT_No.4)	GND (SLOT_No.5)	GND	GND (SLOT_No.6)	GND (SLOT_No.7)	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10			GND			GND

CNE117

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
4	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
5	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
6	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
7			GND	EXTHUB1_INT		GND
8			GND			GND
9			GND			GND
10			GND			GND

CNF117

	A	B	BG	C	D	DG
1	HGBE0_TRX2P	HGBE0_TRX2N	GND	HGBE0_TRX3P	HGBE0_TRX3N	GND
2	HGBE0_TRX1P	HGBE0_TRX1N	GND	HGBE0_TRX0P	HGBE0_TRX0N	GND
3	HGBE0_LED_L	HGBE0_LED_R	GND	HGBE1_LED_L	HGBE1_LED_R	GND
4	HGBE1_TRX2P	HGBE1_TRX2N	GND	HGBE1_TRX3P	HGBE1_TRX3N	GND
5	HGBE1_TRX1P	HGBE1_TRX1N	GND	HGBE1_TRX0P	HGBE1_TRX0N	GND
6	HGBE2_TRX2P	HGBE2_TRX2N	GND	HGBE2_TRX3P	HGBE2_TRX3N	GND
7	HGBE2_TRX1P	HGBE2_TRX1N	GND	HGBE2_TRX0P	HGBE2_TRX0N	GND
8	HGBE2_LED_L	HGBE2_LED_R	GND	HGBE3_LED_L	HGBE3_LED_R	GND
9	HGBE3_TRX2P	HGBE3_TRX2N	GND	HGBE3_TRX3P	HGBE3_TRX3N	GND
10	HGBE3_TRX1P	HGBE3_TRX1N	GND	HGBE3_TRX0P	HGBE3_TRX0N	GND

CNG117

	A	B	BG	C	D	DG
1	HGBE4_TRX2P	HGBE4_TRX2N	GNDI	HGBE4_TRX3P	HGBE4_TRX3N	GNDI
2	HGBE4_TRX1P	HGBE4_TRX1N	GNDI	HGBE4_TRX0P	HGBE4_TRX0N	GNDI
3	HGBE4_LED_L	HGBE4_LED_R	GNDI	HGBE5_LED_L	HGBE5_LED_R	GNDI
4	HGBE5_TRX2P	HGBE5_TRX2N	GNDI	HGBE5_TRX3P	HGBE5_TRX3N	GNDI
5	HGBE5_TRX1P	HGBE5_TRX1N	GNDI	HGBE5_TRX0P	HGBE5_TRX0N	GNDI
6						
7	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V
8	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V
9	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V
10	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V

CNK117

	A	B	BG	C	D	DG
1	HGBE6_TRX2P	HGBE6_TRX2N	GND	HGBE6_TRX3P	HGBE6_TRX3N	GND
2	HGBE6_TRX1P	HGBE6_TRX1N	GND	HGBE6_TRX0P	HGBE6_TRX0N	GND
3	HGBE6_LED_L	HGBE6_LED_R	GND	HGBE7_LED_L	HGBE7_LED_R	GND
4	HGBE7_TRX2P	HGBE7_TRX2N	GND	HGBE7_TRX3P	HGBE7_TRX3N	GND
5	HGBE7_TRX1P	HGBE7_TRX1N	GND	HGBE7_TRX0P	HGBE7_TRX0N	GND
6	HGBE8_TRX2P	HGBE8_TRX2N	GND	HGBE8_TRX3P	HGBE8_TRX3N	GND
7	HGBE8_TRX1P	HGBE8_TRX1N	GND	HGBE8_TRX0P	HGBE8_TRX0N	GND
8	HGBE8_LED_L	HGBE8_LED_R	GND	HGBE9_LED_L	HGBE9_LED_R	GND
9	HGBE9_TRX2P	HGBE9_TRX2N	GND	HGBE9_TRX3P	HGBE9_TRX3N	GND
10	HGBE9_TRX1P	HGBE9_TRX1N	GND	HGBE9_TRX0P	HGBE9_TRX0N	GND

CNL117

	A	B	BG	C	D	DG
1	HGBE10_TRX2P	HGBE10_TRX2N	GND	HGBE10_TRX3P	HGBE10_TRX3N	GND
2	HGBE10_TRX1P	HGBE10_TRX1N	GND	HGBE10_TRX0P	HGBE10_TRX0N	GND
3	HGBE10_LED_L	HGBE10_LED_R	GND	HGBE11_LED_L	HGBE11_LED_R	GND
4	HGBE11_TRX2P	HGBE11_TRX2N	GND	HGBE11_TRX3P	HGBE11_TRX3N	GND
5	HGBE11_TRX1P	HGBE11_TRX1N	GND	HGBE11_TRX0P	HGBE11_TRX0N	GND
6	HGBE12_TRX2P	HGBE12_TRX2N	GND	HGBE12_TRX3P	HGBE12_TRX3N	GND
7	HGBE12_TRX1P	HGBE12_TRX1N	GND	HGBE12_TRX0P	HGBE12_TRX0N	GND
8	HGBE12_LED_L	HGBE12_LED_R	GND	HGBE13_LED_L	HGBE13_LED_R	GND
9	HGBE13_TRX2P	HGBE13_TRX2N	GND	HGBE13_TRX3P	HGBE13_TRX3N	GND
10	HGBE13_TRX1P	HGBE13_TRX1N	GND	HGBE13_TRX0P	HGBE13_TRX0N	GND

Rear CN-3234

CNA217

	A	B	BG	C	D	DG
1			GND			GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
3	(SLOT_No.4)	GND (SLOT_No.5)	GND	GND (SLOT_No.6)	GND (SLOT_No.7)	GND
4	(SLOT_No.0)	GND (SLOT_No.1)	GND	GND (SLOT_No.2)	GND (SLOT_No.3)	GND
5	BD_EXT_16F	BD_EXT_16R	GND			GND
6	RESET0	DC_ENBL0	GND		FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNE217

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND	EXTHUB1_INT		GND
5	EXTHUB1_MDIO	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
6	EXTHUB0_MDIO	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
7	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
8	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
9			GND			GND
10			GND			GND

CNF217

	A	B	BG	C	D	DG
1	HGBE3_TRX1P	HGBE3_TRX1N	GND	HGBE3_TRX0P	HGBE3_TRX0N	GND
2	HGBE3_TRX2P	HGBE3_TRX2N	GND	HGBE3_TRX3P	HGBE3_TRX3N	GND
3	HGBE2_LED_L	HGBE2_LED_R	GND	HGBE3_LED_L	HGBE3_LED_R	GND
4	HGBE2_TRX1P	HGBE2_TRX1N	GND	HGBE2_TRX0P	HGBE2_TRX0N	GND
5	HGBE2_TRX2P	HGBE2_TRX2N	GND	HGBE2_TRX3P	HGBE2_TRX3N	GND
6	HGBE1_TRX1P	HGBE1_TRX1N	GND	HGBE1_TRX0P	HGBE1_TRX0N	GND
7	HGBE1_TRX2P	HGBE1_TRX2N	GND	HGBE1_TRX3P	HGBE1_TRX3N	GND
8	HGBE0_LED_L	HGBE0_LED_R	GND	HGBE1_LED_L	HGBE1_LED_R	GND
9	HGBE0_TRX1P	HGBE0_TRX1N	GND	HGBE0_TRX0P	HGBE0_TRX0N	GND
10	HGBE0_TRX2P	HGBE0_TRX2N	GND	HGBE0_TRX3P	HGBE0_TRX3N	GND

CNG217

	A	B	BG	C	D	DG
1	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V
2	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V	+2.5V
3	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V
4	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V	+1.9V
5						
6	HGBE5_TRX1P	HGBE5_TRX1N	GNDI	HGBE5_TRX0P	HGBE5_TRX0N	GNDI
7	HGBE5_TRX2P	HGBE5_TRX2N	GNDI	HGBE5_TRX3P	HGBE5_TRX3N	GNDI
8	HGBE4_LED_L	HGBE4_LED_R	GNDI	HGBE5_LED_L	HGBE5_LED_R	GNDI
9	HGBE4_TRX1P	HGBE4_TRX1N	GNDI	HGBE4_TRX0P	HGBE4_TRX0N	GNDI
10	HGBE4_TRX2P	HGBE4_TRX2N	GNDI	HGBE4_TRX3P	HGBE4_TRX3N	GNDI

CNK217

	A	B	BG	C	D	DG
1	HGBE9_TRX1P	HGBE9_TRX1N	GND	HGBE9_TRX0P	HGBE9_TRX0N	GND
2	HGBE9_TRX2P	HGBE9_TRX2N	GND	HGBE9_TRX3P	HGBE9_TRX3N	GND
3	HGBE9_LED_L	HGBE9_LED_R	GND	HGBE9_LED_L	HGBE9_LED_R	GND
4	HGBE8_TRX1P	HGBE8_TRX1N	GND	HGBE8_TRX0P	HGBE8_TRX0N	GND
5	HGBE8_TRX2P	HGBE8_TRX2N	GND	HGBE8_TRX3P	HGBE8_TRX3N	GND
6	HGBE7_TRX1P	HGBE7_TRX1N	GND	HGBE7_TRX0P	HGBE7_TRX0N	GND
7	HGBE7_TRX2P	HGBE7_TRX2N	GND	HGBE7_TRX3P	HGBE7_TRX3N	GND
8	HGBE6_LED_L	HGBE6_LED_R	GND	HGBE7_LED_L	HGBE7_LED_R	GND
9	HGBE6_TRX1P	HGBE6_TRX1N	GND	HGBE6_TRX0P	HGBE6_TRX0N	GND
10	HGBE6_TRX2P	HGBE6_TRX2N	GND	HGBE6_TRX3P	HGBE6_TRX3N	GND

CNL217

	A	B	BG	C	D	DG
1	HGBE13_TRX1P	HGBE13_TRX1N	GND	HGBE13_TRX0P	HGBE13_TRX0N	GND
2	HGBE13_TRX2P	HGBE13_TRX2N	GND	HGBE13_TRX3P	HGBE13_TRX3N	GND
3	HGBE12_LED_L	HGBE12_LED_R	GND	HGBE13_LED_L	HGBE13_LED_R	GND
4	HGBE12_TRX1P	HGBE12_TRX1N	GND	HGBE12_TRX0P	HGBE12_TRX0N	GND
5	HGBE12_TRX2P	HGBE12_TRX2N	GND	HGBE12_TRX3P	HGBE12_TRX3N	GND
6	HGBE11_TRX1P	HGBE11_TRX1N	GND	HGBE11_TRX0P	HGBE11_TRX0N	GND
7	HGBE11_TRX2P	HGBE11_TRX2N	GND	HGBE11_TRX3P	HGBE11_TRX3N	GND
8	HGBE10_LED_L	HGBE10_LED_R	GND	HGBE11_LED_L	HGBE11_LED_R	GND
9	HGBE10_TRX1P	HGBE10_TRX1N	GND	HGBE10_TRX0P	HGBE10_TRX0N	GND
10	HGBE10_TRX2P	HGBE10_TRX2N	GND	HGBE10_TRX3P	HGBE10_TRX3N	GND

CNN217

	A	B	BG	C	D	DG
1	GPI1_OUT6	GPI1_IN6	GND	GPI2_OUT6	GPI2_IN6	GND
2	GPI1_OUT5	GPI1_IN5	GND	GPI2_OUT5	GPI2_IN5	GND
3	GPI1_OUT4	GPI1_IN4	GND	GPI2_OUT4	GPI2_IN4	GND
4	GPI1_OUT3	GPI1_IN3	GND	GPI2_OUT3	GPI2_IN3	GND
5	GPI1_OUT2	GPI1_IN2	GND	GPI2_OUT2	GPI2_IN2	GND
6	GPI1_OUT1	GPI1_IN1	GND	GPI2_OUT1	GPI2_IN1	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND

CNP217

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5			GND			GND
6			GND			GND
7			GND			GND
8			GND			GND
9	GPI1_OUT8	GPI1_IN8	GND	GPI2_OUT8	GPI2_IN8	GND
10	GPI1_OUT7	GPI1_IN7	GND	GPI2_OUT7	GPI2_IN7	GND

CNA117
CNA217

CNE117 CNF117 CNG117
CNE217 CNF217 CNG217

CNK117 CNL117
CNK217 CNL217

CNN217 CNP217

MB-1150 (17/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_17

MB-1150 (18/20)
SUFFIX: -11

Front CA-82

CNA118

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	DC_ENBL0	DC_ENBL1	GND	SD-HD0	FUSE+12V	GND
6	BD_EXT_17P	BD_EXT_17R	GND	SD-HD1	SD-HD2	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	(SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10	RESET0	RESET1	GND	RESET2	RESET3	GND

CNB118

	A	B	BG	C	D	DG
1	VCLK0P	VCLK0N	GND	VCLK1P	VCLK1N	GND
2	VCLK2P	VCLK2N	GND	VCLK3P	VCLK3N	GND
3	VCLK4P	VCLK4N	GND	VCLK5P	VCLK5N	GND
4	VCLK6P	VCLK6N	GND	VCLK7P	VCLK7N	GND
5	VCLK8P	VCLK8N	GND	VCLK9P	VCLK9N	GND
6	VCLK10P	VCLK10N	GND	VCLK11P	VCLK11N	GND
7	VCLK12P	VCLK12N	GND			GND
8	FD0P	FD0N	GND	VD0P	VD0N	GND
9	FD1P	FD1N	GND	VD1P	VD1N	GND
10	FD2P	FD2N	GND	VD2P	VD2N	GND

CNC118

	A	B	BG	C	D	DG
1	FD3P	FD3N	GND	VD3P	VD3N	GND
2	FD4P	FD4N	GND	VD4P	VD4N	GND
3	FD5P	FD5N	GND	VD5P	VD5N	GND
4	FD6P	FD6N	GND	VD6P	VD6N	GND
5	FD7P	FD7N	GND	VD7P	VD7N	GND
6	FD8P	FD8N	GND	VD8P	VD8N	GND
7	FD9P	FD9N	GND	VD9P	VD9N	GND
8	FD10P	FD10N	GND	VD10P	VD10N	GND
9	FD11P	FD11N	GND	VD11P	VD11N	GND
10	FD12P	FD12N	GND	VD12P	VD12N	GND

CNE118

	A	B	BG	C	D	DG
1		ITC_1IN	GND		IREF_1IN	GND
2	IREF_RESERVE0		GND	IREF_RESERVE0		GND
3	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
4	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
5	EXTHUB0_MD10	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
6	EXTHUB1_MD10	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
7			GND	EXTHUB1_INT		GND
8			GND			GND
9			GND			GND
10			GND			GND

CNF118

	A	B	BG	C	D	DG
1	GBE0_TRX2P0	GBE0_TRX2N0	GND	GBE0_TRX3P0	GBE0_TRX3N0	GND
2	GBE0_TRX0P0	GBE0_TRX0N0	GND	GBE0_TRX1P0	GBE0_TRX1N0	GND
3	GBE0_LED_L0	GBE0_LED_R0	GND	GBE1_LED_L0	GBE1_LED_R0	GND
4	GBE1_TRX2P0	GBE1_TRX2N0	GND	GBE1_TRX3P0	GBE1_TRX3N0	GND
5	GBE1_TRX0P0	GBE1_TRX0N0	GND	GBE1_TRX1P0	GBE1_TRX1N0	GND
6	GBE2_TRX2P0	GBE2_TRX2N0	GND	GBE2_TRX3P0	GBE2_TRX3N0	GND
7	GBE2_TRX0P0	GBE2_TRX0N0	GND	GBE2_TRX1P0	GBE2_TRX1N0	GND
8	GBE2_LED_L0	GBE2_LED_R0	GND	GBE3_LED_L0	GBE3_LED_R0	GND
9	GBE3_TRX2P0	GBE3_TRX2N0	GND	GBE3_TRX3P0	GBE3_TRX3N0	GND
10	GBE3_TRX0P0	GBE3_TRX0N0	GND	GBE3_TRX1P0	GBE3_TRX1N0	GND

CNG118

	A	B	BG	C	D	DG
1	EXTBUS_A00	EXTBUS_A10	GND	EXTBUS_D00	EXTBUS_D10	GND
2	EXTBUS_A20	EXTBUS_A30	GND	EXTBUS_D20	EXTBUS_D30	GND
3	EXTBUS_A40	EXTBUS_A50	GND	EXTBUS_D40	EXTBUS_D50	GND
4	EXTBUS_A60	EXTBUS_A70	GND	EXTBUS_D60	EXTBUS_D70	GND
5	EXTBUS_A80	EXTBUS_A90	GND	EXTBUS_D80	EXTBUS_D90	GND
6	EXTBUS_A100	EXTBUS_A110	GND	EXTBUS_D100	EXTBUS_D110	GND
7	EXTBUS_A120	EXTBUS_A130	GND	EXTBUS_D120	EXTBUS_D130	GND
8	EXTBUS_A140	EXTBUS_A150	GND	EXTBUS_D140	EXTBUS_D150	GND
9	EXTBUS_OE0	EXTBUS_WE0	GND	EXTBUS_BE00	EXTBUS_BE10	GND
10	EXTBUS_CS00	EXTBUS_CS10	GND	EXTBUS_CS20	EXTBUS_CS30	GND

CNJ118

	A	B	BG	C	D	DG
1	EXTBUS_CS40		GND	EXTBUS_INT0	EXTBUS_BUSY0	GND
2	INET0_TRX0P	INET0_TRX0N	GND	INET0_TRX1P	INET0_TRX1N	GND
3	INET0_TRX2P	INET0_TRX2N	GND	INET0_TRX3P	INET0_TRX3N	GND
4	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
5	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
6			GND			GND
7	INET2_TRX0P	INET2_TRX0N	GND	INET2_TRX1P	INET2_TRX1N	GND
8	INET2_TRX2P	INET2_TRX2N	GND	INET2_TRX3P	INET2_TRX3N	GND
9	INET3_TRX0P	INET3_TRX0N	GND	INET3_TRX1P	INET3_TRX1N	GND
10	INET3_TRX2P	INET3_TRX2N	GND	INET3_TRX3P	INET3_TRX3N	GND

CNK118

	A	B	BG	C	D	DG
1			GND			GND
2	INET4_TRX0P	INET4_TRX0N	GND	INET4_TRX1P	INET4_TRX1N	GND
3	INET4_TRX2P	INET4_TRX2N	GND	INET4_TRX3P	INET4_TRX3N	GND
4	INET5_TRX0P	INET5_TRX0N	GND	INET5_TRX1P	INET5_TRX1N	GND
5	INET5_TRX2P	INET5_TRX2N	GND	INET5_TRX3P	INET5_TRX3N	GND
6			GND			GND
7	INET6_TRX0P	INET6_TRX0N	GND	INET6_TRX1P	INET6_TRX1N	GND
8	INET6_TRX2P	INET6_TRX2N	GND	INET6_TRX3P	INET6_TRX3N	GND
9	IINET7_TRX0P	IINET7_TRX0N	GND	IINET7_TRX1P	IINET7_TRX1N	GND
10	IINET7_TRX2P	IINET7_TRX2N	GND	IINET7_TRX3P	IINET7_TRX3N	GND

CNL118

	A	B	BG	C	D	DG
1	BD_EXT_19P	BD_EXT_18P	GND	BD_EXT_19R	BD_EXT_18R	GND
2	BD_EXT_17P	BD_EXT_16P	GND	BD_EXT_17R	BD_EXT_16R	GND
3	BD_EXT_15P	BD_EXT_14P	GND	BD_EXT_15R	BD_EXT_14R	GND
4	BD_EXT_13P	BD_EXT_12P	GND	BD_EXT_13R	BD_EXT_12R	GND
5	BD_EXT_11P	BD_EXT_10P	GND	BD_EXT_11R	BD_EXT_10R	GND
6	BD_EXT_9P	BD_EXT_8P	GND	BD_EXT_9R	BD_EXT_8R	GND
7	BD_EXT_7P	BD_EXT_6P	GND	BD_EXT_7R	BD_EXT_6R	GND
8	BD_EXT_5P	BD_EXT_4P	GND	BD_EXT_5R	BD_EXT_4R	GND
9	BD_EXT_3P	BD_EXT_2P	GND	BD_EXT_3R	BD_EXT_2R	GND
10	BD_EXT_1P	BD_EXT_0P	GND	BD_EXT_1R	BD_EXT_0R	GND

CNN118

	A	B	BG	C	D	DG
1	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
2	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
3	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
4	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
5	GP12_OUT1	GP12_IN1	GND	GP11_OUT1	GP11_IN1	GND
6	GP12_OUT2	GP12_IN2	GND	GP11_OUT2	GP11_IN2	GND
7	GP12_OUT3	GP12_IN3	GND	GP11_OUT3	GP11_IN3	GND
8	GP12_OUT4	GP12_IN4	GND	GP11_OUT4	GP11_IN4	GND
9	GP12_OUT5	GP12_IN5	GND	GP11_OUT5	GP11_IN5	GND
10	GP12_OUT6	GP12_IN6	GND	GP11_OUT6	GP11_IN6	GND

CNP118

	A	B	BG	C	D	DG
1	GP12_OUT7	GP12_IN7	GND	GP11_OUT7	GP11_IN7	GND
2	GP12_OUT8	GP12_IN8	GND	GP11_OUT8	GP11_IN8	GND
3	POW_SEQ00	GND POW_SEQ10	GND			GND
4	FAN1_PULSE1	FAN1_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
5	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
6	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
7	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
8	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
9	FAN5_PULSE1	FAN5_PULSE2	GND	FAN5_PULSE3	FAN5_PULSE4	GND
10	FAN5_PULSE5	FAN6_PULSE10	GND	FAN6_PULSE20	FAN6_PULSE30	GND

CNR118

	A	B	BG	C	D	DG
1	FAN6_PULSE40	FAN6_PULSE50	GND	FAN1_CTRL	FAN2_CTRL	GND
2	FAN3_CTRL	FAN4_CTRL	GND	FAN5_CTRL	FAN6_CTRL0	GND
3	PS1_B_LED		GND	PS1_FAN_ERR	PS1_THR_ERR	GND
4	PS1_EXIST		GND	PS1_DC_ERR	PS1_AC_ERR	GND
5	PS2_B_LED		GND	PS2_FAN_ERR	PS2_THR_ERR	GND
6	PS2_EXIST		GND	PS2_DC_ERR	PS2_AC_ERR	GND
7	PS3_B_LED		GND	PS3_FAN_ERR	PS3_THR_ERR	GND
8	PS3_EXIST		GND	PS3_DC_ERR	PS3_AC_ERR	GND
9	PS4_B_LED		GND	PS4_FAN_ERR	PS4_THR_ERR	GND
10	PS4_EXIST		GND	PS4_DC_ERR	PS4_AC_ERR	GND

Rear CN-3233

CNA218

	A	B	BG	C	D	DG
1	RESET0	RESET1	GND	RESET2	RESET3	GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
3	(SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_17P	BD_EXT_17R	GND	SD-HD1	SD-HD2	GND
6	DC_ENBL0	DC_ENBL1	GND	SD-HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNE218

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND	EXTHUB1_INT		GND
5	EXTHUB1_MD10	EXTHUB1_MDC	GND	EXTHUB0_INT		GND
6	EXTHUB0_MD10	EXTHUB0_MDC	GND	EXTHUB0_RESET	EXTHUB1_RESET	GND
7	EXTHUB_CTRL4	EXTHUB_CTRL5	GND	EXTHUB_CTRL6	EXTHUB_CTRL7	GND
8	EXTHUB_CTRL0	EXTHUB_CTRL1	GND	EXTHUB_CTRL2	EXTHUB_CTRL3	GND
9	IREF_RESERVE0		GND	IREF_RESERVE0		GND
10		ITC_1IN	GND		IREF_1IN	GND

CNF218

	A	B	BG	C	D	DG
1	GBE3_TRX0P0	GBE3_TRX0N0	GND	GBE3_TRX1P0	GBE3_TRX1N0	GND
2	GBE3_TRX2P0	GBE3_TRX2N0	GND	GBE3_TRX3P0	GBE3_TRX3N0	GND
3	GBE2_LED_L0	GBE2_LED_R0	GND	GBE3_LED_L0	GBE3_LED_R0	GND
4	GBE2_TRX0P0	GBE2_TRX0N0	GND	GBE2_TRX1P0	GBE2_TRX1N0	GND
5	GBE2_TRX2P0	GBE2_TRX2N0	GND	GBE2_TRX3P0	GBE2_TRX3N0	GND
6	GBE1_TRX0P0	GBE1_TRX0N0	GND	GBE1_TRX1P0	GBE1_TRX1N0	GND
7	GBE1_TRX2P0	GBE1_TRX2N0	GND	GBE1_TRX3P0	GBE1_TRX3N0	GND
8	GBE0_LED_L0	GBE0_LED_R0	GND	GBE1_LED_L0	GBE1_LED_R0	GND
9	GBE0_TRX0P0	GBE0_TRX0N0	GND	GBE0_TRX1P0	GBE0_TRX1N0	GND
10	GBE0_TRX2P0	GBE0_TRX2N0	GND	GBE0_TRX3P0	GBE0_TRX3N0	GND

CNN218

	A	B	BG	C	D	DG
1	GP12_OUT6	GP12_IN6	GND	GP11_OUT6	GP11_IN6	GND
2	GP12_OUT5	GP12_IN5	GND	GP11_OUT5	GP11_IN5	GND
3	GP12_OUT4	GP12_IN4	GND	GP11_OUT4	GP11_IN4	GND
4	GP12_OUT3	GP12_IN3	GND	GP11_OUT3	GP11_IN3	GND
5	GP12_OUT2	GP12_IN2	GND	GP11_OUT2	GP11_IN2	GND
6	GP12_OUT1	GP12_IN1	GND	GP11_OUT1	GP11_IN1	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND

CNP218

	A	B	BG	C	D	DG
1	FAN5_PULSE5		IFAN6_PULSE10	GND	IFAN6_PULSE20	GND
2	FAN5_PULSE1	FAN5_PULSE2	GND	FAN5_PULSE3	FAN5_PULSE4	GND
3	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
4	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
5	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
6	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
7	FAN1_PULSE1	FAN1_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
8	IPOW_SEQ00	GND IPOW_SEQ10	GND			GND
9	GP12_OUT8	GP12_IN8	GND	GP11_OUT8	GP11_IN8	GND
10	GP12_OUT7	GP12_IN7	GND	GP11_OUT7	GP11_IN7	GND

CNA118 CNA218	CNB118	CNC118
CNE118 CNE218	CNF118 CNF218	CNG118
CNJ118	CNK118	CNL118
CNN118 CNN218	CNP118 CNP218	CNR118

MB-1150 (18/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_18

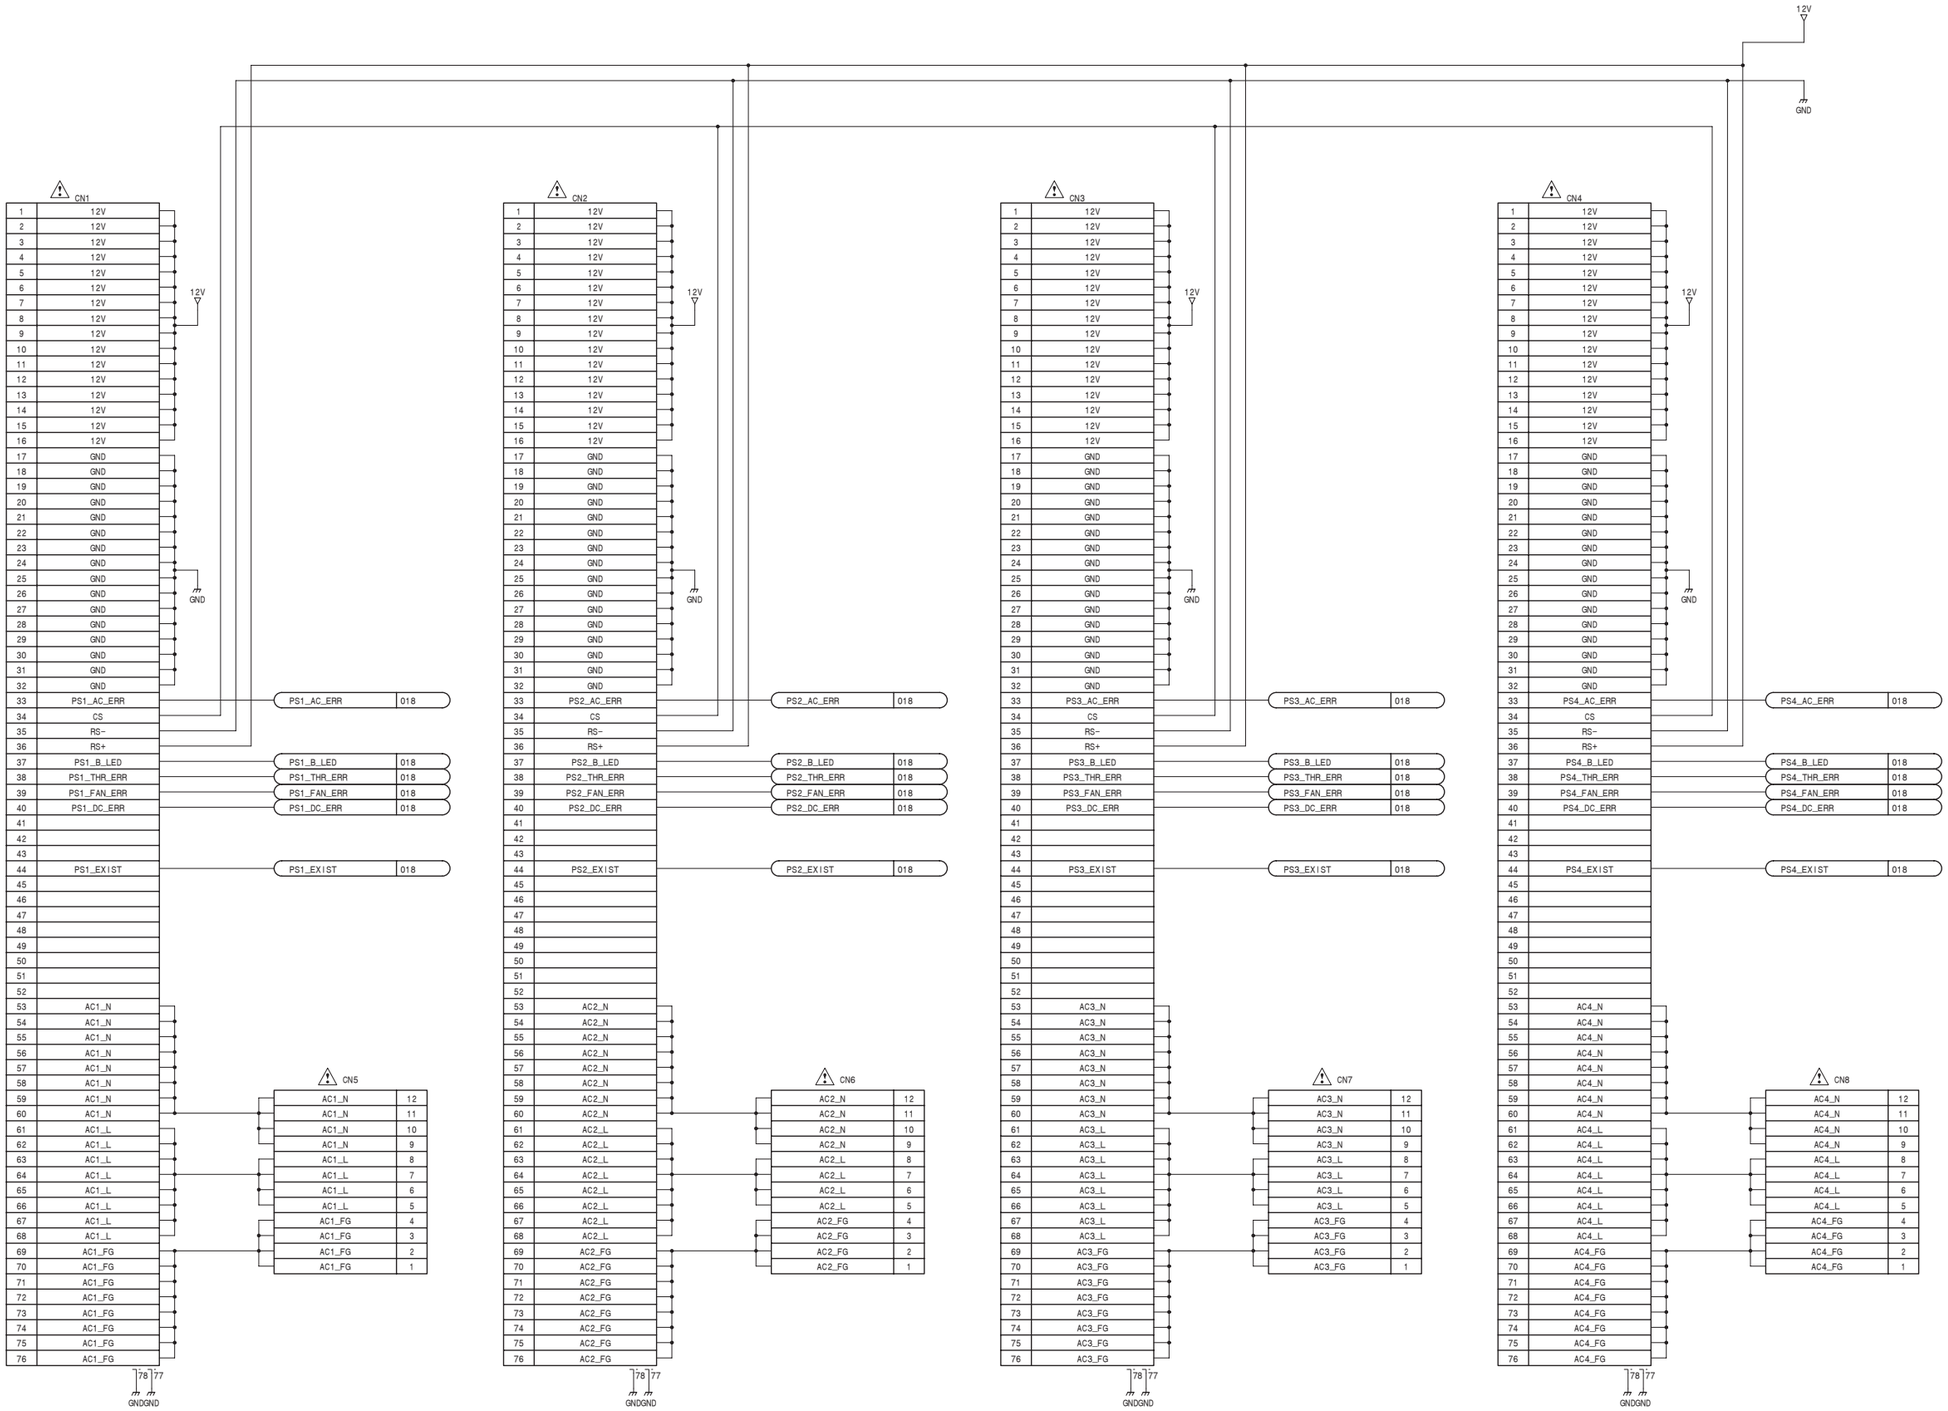

MB-1150 (19/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_19

MB-1150 (20/20) **SUFFIX: -11**

CNS102

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN1_PULSE1	FAN1_PULSE2	FAN1_PULSE3	FAN1_PULSE4
6	FAN1_PULSE5		FAN1_CTRL	

CNS106

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN2_PULSE1	FAN2_PULSE2	FAN2_PULSE3	FAN2_PULSE4
6	FAN2_PULSE5		FAN2_CTRL	

CNS110

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN3_PULSE1	FAN3_PULSE2	FAN3_PULSE3	FAN3_PULSE4
6	FAN3_PULSE5		FAN3_CTRL	

CNS114

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN4_PULSE1	FAN4_PULSE2	FAN4_PULSE3	FAN4_PULSE4
6	FAN4_PULSE5		FAN4_CTRL	

CNS118

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN5_PULSE1	FAN5_PULSE2	FAN5_PULSE3	FAN5_PULSE4
6	FAN5_PULSE5		FAN5_CTRL	

MB-1150 (20/20)
BOARD NO. 1-879-562-11
MVS-8000X_MB-1150_001_20

A SIDE CA-82A

CNB101

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	I2C_ENBL0↑	I2C_ENBL1↑	GND	ISD-/HD0↑	IFUSE+12V↑	GND
6	BD_EXT_0F	BD_EXT_0R	GND	ISD-/HD1↑	ISD-/HD2↑	GND
7	GLOT_Nv0↑	GND GLOT_Nv1↑	GND	GND GLOT_Nv2↑	GND GLOT_Nv3↑	GND
8	GND GLOT_Nv4↑	GND GLOT_Nv5↑	GND	GND GLOT_Nv6↑	GND GLOT_Nv7↑	GND
9	MVE_MB_3V↑	MVE_MB_3V↑	GND	MVE_MB_SCL↑	MVE_MB_SDA↑	GND
10	MVE_RESET0	MVE_RESET1↑	GND	MVE_RESET2↑	MVE_RESET3↑	GND

CNE101

	A	B	BG	C	D	DG
1		ITC_1N↑	GND		IREF_1N↑	GND
2	IREF_RESERVE↑		GND	IREF_RESERVE↑		GND
3	VD0P	VD0N	GND	IEXTHUB_CTRL2↑	IEXTHUB_CTRL3↑	GND
4	IEXTHUB_CTRL4↑	IEXTHUB_CTRL5↑	GND	IEXTHUB_CTRL6↑	FD10N	GND
5	CA1CD2CLK	CA1CI1CLK	GND	RESET3	IEXTHUB_RESET↑	GND
6	CA1CD2DAT	FD10P	GND	CA1CI1DAT		GND
7			GND	GND ISG_SEL↑		GND
8			GND			GND
9			GND			GND
10			GND			GND

CNF101

	A	B	BG	C	D	DG
1	GBE0_TRX2P↑	GBE0_TRX2N↑	GND	GBE0_TRX3P↑	GBE0_TRX3N↑	GND
2	GBE0_TRX0P↑	GBE0_TRX0N↑	GND	GBE0_TRX1P↑	GBE0_TRX1N↑	GND
3	GBE0_LED_L↑	GBE0_LED_R↑	GND	GBE1_LED_L↑	GBE1_LED_R↑	GND
4	GBE1_TRX2P↑	GBE1_TRX2N↑	GND	GBE1_TRX3P↑	GBE1_TRX3N↑	GND
5	GBE1_TRX0P↑	GBE1_TRX0N↑	GND	GBE1_TRX1P↑	GBE1_TRX1N↑	GND
6	GBE2_TRX2P↑	GBE2_TRX2N↑	GND	GBE2_TRX3P↑	GBE2_TRX3N↑	GND
7	GBE2_TRX0P↑	GBE2_TRX0N↑	GND	GBE2_TRX1P↑	GBE2_TRX1N↑	GND
8	GBE2_LED_L↑	GBE2_LED_R↑	GND	GBE3_LED_L↑	GBE3_LED_R↑	GND
9	GBE3_TRX2P↑	GBE3_TRX2N↑	GND	GBE3_TRX3P↑	GBE3_TRX3N↑	GND
10	GBE3_TRX0P↑	GBE3_TRX0N↑	GND	GBE3_TRX1P↑	GBE3_TRX1N↑	GND

CNG101 NM

	A	B	BG	C	D	DG
1	IEXTBUS_A0↑	IEXTBUS_A1↑	GND	IEXTBUS_D0↑	IEXTBUS_D1↑	GND
2	IEXTBUS_A2↑	IEXTBUS_A3↑	GND	IEXTBUS_D2↑	IEXTBUS_D3↑	GND
3	IEXTBUS_A4↑	IEXTBUS_A5↑	GND	IEXTBUS_D4↑	IEXTBUS_D5↑	GND
4	IEXTBUS_A6↑	IEXTBUS_A7↑	GND	IEXTBUS_D6↑	IEXTBUS_D7↑	GND
5	IEXTBUS_A8↑	IEXTBUS_A9↑	GND	IEXTBUS_D8↑	IEXTBUS_D9↑	GND
6	IEXTBUS_A10↑	IEXTBUS_A11↑	GND	IEXTBUS_D10↑	IEXTBUS_D11↑	GND
7	IEXTBUS_A12↑	IEXTBUS_A13↑	GND	IEXTBUS_D12↑	IEXTBUS_D13↑	GND
8	IEXTBUS_A14↑	IEXTBUS_A15↑	GND	IEXTBUS_D14↑	IEXTBUS_D15↑	GND
9	IEXTBUS_OE↑	IEXTBUS_WE↑	GND	IEXTBUS_BE0↑	IEXTBUS_BE1↑	GND
10	IEXTBUS_CS0↑	IEXTBUS_CS1↑	GND	IEXTBUS_CS2↑	IEXTBUS_CS3↑	GND

CNJ101

	A	B	BG	C	D	DG
1	IEXTBUS_CS4↑		GND	IEXTBUS_INT↑	IEXTBUS_BUSY↑	GND
2	MVE_INET0_TRX0P	MVE_INET0_TRX0N	GND	MVE_INET0_TRX1P	MVE_INET0_TRX1N	GND
3	MVE_INET0_TRX2P	MVE_INET0_TRX2N	GND	MVE_INET0_TRX3P	MVE_INET0_TRX3N	GND
4	MVE_INET1_TRX0P	MVE_INET1_TRX0N	GND	MVE_INET1_TRX1P	MVE_INET1_TRX1N	GND
5	MVE_INET1_TRX2P	MVE_INET1_TRX2N	GND	MVE_INET1_TRX3P	MVE_INET1_TRX3N	GND
6			GND			GND
7	INET7_TRX0P	INET7_TRX0N	GND	INET7_TRX1P	INET7_TRX1N	GND
8	INET7_TRX2P	INET7_TRX2N	GND	INET7_TRX3P	INET7_TRX3N	GND
9	I3NET3_TRX0P↑	I3NET3_TRX0N↑	GND	I3NET3_TRX1P↑	I3NET3_TRX1N↑	GND
10	I3NET3_TRX2P↑	I3NET3_TRX2N↑	GND	I3NET3_TRX3P↑	I3NET3_TRX3N↑	GND

CNL101

	A	B	BG	C	D	DG
1	IBD_EXT_19F↑	IBD_EXT_18F↑	GND	IBD_EXT_19R↑	IBD_EXT_18R↑	GND
2	IBD_EXT_17F↑	IBD_EXT_16F↑	GND	IBD_EXT_17R↑	IBD_EXT_16R↑	GND
3	IBD_EXT_15F↑	IBD_EXT_14F↑	GND	IBD_EXT_15R↑	IBD_EXT_14R↑	GND
4	IBD_EXT_13F↑	IBD_EXT_12F↑	GND	IBD_EXT_13R↑	IBD_EXT_12R↑	GND
5	IBD_EXT_11F↑	IBD_EXT_10F↑	GND	IBD_EXT_11R↑	IBD_EXT_10R↑	GND
6	IBD_EXT_9F↑	IBD_EXT_8F↑	GND	IBD_EXT_9R↑	IBD_EXT_8R↑	GND
7	IBD_EXT_7F↑	IBD_EXT_6F↑	GND	IBD_EXT_7R↑	IBD_EXT_6R↑	GND
8	IBD_EXT_5F↑	IBD_EXT_4F↑	GND	IBD_EXT_5R↑	IBD_EXT_4R↑	GND
9	IBD_EXT_3F↑	BD_EXT_2F	GND	IBD_EXT_3R↑	IBD_EXT_2R↑	GND
10	BD_EXT_1F	BD_EXT_0F	GND	IBD_EXT_1R↑	BD_EXT_0R	GND

CNM101

	A	B	BG	C	D	DG
1	MVE_RS422_1_TXP↑	MVE_RS422_1_TXN↑	GND	MVE_RS422_1_RXP↑	MVE_RS422_1_RXN↑	GND
2	MVE_RS422_2_TXP↑	MVE_RS422_2_TXN↑	GND	MVE_RS422_2_RXP↑	MVE_RS422_2_RXN↑	GND
3	MVE_RS422_3_TXP↑	MVE_RS422_3_TXN↑	GND	MVE_RS422_3_RXP↑	MVE_RS422_3_RXN↑	GND
4	MVE_RS422_4_TXP↑	MVE_RS422_4_TXN↑	GND	MVE_RS422_4_RXP↑	MVE_RS422_4_RXN↑	GND
5	MVE_GP12_OUT1↑	MVE_GP12_IN1↑	GND	MVE_GP11_OUT1↑	MVE_GP11_IN1↑	GND
6	MVE_GP12_OUT2↑	MVE_GP12_IN2↑	GND	MVE_GP11_OUT2↑	MVE_GP11_IN2↑	GND
7	MVE_GP12_OUT3↑	MVE_GP12_IN3↑	GND	MVE_GP11_OUT3↑	MVE_GP11_IN3↑	GND
8	MVE_GP12_OUT4↑	MVE_GP12_IN4↑	GND	MVE_GP11_OUT4↑	MVE_GP11_IN4↑	GND
9	MVE_GP12_OUT5↑	MVE_GP12_IN5↑	GND	MVE_GP11_OUT5↑	MVE_GP11_IN5↑	GND
10	MVE_GP12_OUT6↑	MVE_GP12_IN6↑	GND	MVE_GP11_OUT6↑	MVE_GP11_IN6↑	GND

CNN101

	A	B	BG	C	D	DG
1	MVE_GP12_OUT7↑	MVE_GP12_IN7↑	GND	MVE_GP11_OUT7↑	MVE_GP11_IN7↑	GND
2	MVE_GP12_OUT8↑	MVE_GP12_IN8↑	GND	MVE_GP11_OUT8↑	MVE_GP11_IN8↑	GND
3	IPOW_SEG0↑	IPOW_SEG1↑	GND			GND
4	IFAN1_PULSE1↑	IFAN1_PULSE2↑	GND	IFAN1_PULSE3↑	IFAN1_PULSE4↑	GND
5	IFAN1_PULSE5↑	IFAN2_PULSE1↑	GND	IFAN2_PULSE2↑	IFAN2_PULSE3↑	GND
6	IFAN2_PULSE4↑	IFAN2_PULSE5↑	GND	IFAN3_PULSE1↑	IFAN3_PULSE2↑	GND
7	IFAN3_PULSE3↑	IFAN3_PULSE4↑	GND	IFAN3_PULSE5↑	IFAN4_PULSE1↑	GND
8	IFAN4_PULSE2↑	IFAN4_PULSE3↑	GND	IFAN4_PULSE4↑	IFAN4_PULSE5↑	GND
9	IFAN5_PULSE1↑	IFAN5_PULSE2↑	GND	IFAN5_PULSE3↑	IFAN5_PULSE4↑	GND
10	IFAN5_PULSE5↑	IFAN6_PULSE1↑	GND	IFAN6_PULSE2↑	IFAN6_PULSE3↑	GND

CNP101

	A	B	BG	C	D	DG
1	IFAN6_PULSE4↑	IFAN6_PULSE5↑	GND	IFAN1_CTRL↑	IFAN2_CTRL↑	GND
2	IFAN3_CTRL↑	IFAN4_CTRL↑	GND	IFAN5_CTRL↑	IFAN6_CTRL↑	GND
3	IP51_B_LED↑		GND	IP51_FAN_ERR↑	IP51_THR_ERR↑	GND
4	IP51_EX1ST↑		GND	IP51_DC_ERR↑	IP51_AC_ERR↑	GND
5	IP52_B_LED↑		GND	IP52_FAN_ERR↑	IP52_THR_ERR↑	GND
6	IP52_EX1ST↑		GND	IP52_DC_ERR↑	IP52_AC_ERR↑	GND
7	IP53_B_LED↑		GND	IP53_FAN_ERR↑	IP53_THR_ERR↑	GND
8	IP53_EX1ST↑		GND	IP53_DC_ERR↑	IP53_AC_ERR↑	GND
9	IP54_B_LED↑		GND	IP54_FAN_ERR↑	IP54_THR_ERR↑	GND
10	IP54_EX1ST↑		GND	IP54_DC_ERR↑	IP54_AC_ERR↑	GND

B SIDE CN-3338

CNB201

	A	B	BG	C	D	DG
1	MVE_RESET0	MVE_RESET1↑	GND	MVE_RESET2↑	MVE_RESET3↑	GND
2	MVE_MB_3V↑	MVE_MB_3V↑	GND	MVE_MB_SCL↑	MVE_MB_SDA↑	GND
3	GND GLOT_Nv4↑	GND GLOT_Nv5↑	GND	GND GLOT_Nv6↑	GND GLOT_Nv7↑	GND
4	GLOT_Nv0↑	GND GLOT_Nv1↑	GND	GND GLOT_Nv2↑	GND GLOT_Nv3↑	GND
5	BD_EXT_0F	BD_EXT_0R	GND	ISD-/HD1↑	ISD-/HD2↑	GND
6	I2C_ENBL0↑	I2C_ENBL1↑	GND	ISD-/HD0↑	IFUSE+12V↑	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNE201 NM

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND	GND ISG_SEL↑		GND
5	CA1CD2DAT	FD10P	GND	CA1CI1DAT		GND
6	CA1CD2CLK	CA1CI1CLK	GND	RESET3	IEXTHUB_RESET↑	GND
7	IEXTHUB_CTRL4↑	IEXTHUB_CTRL5↑	GND	IEXTHUB_CTRL6↑	FD10N	GND
8	VD0P	VD0N	GND	IEXTHUB_CTRL2↑	IEXTHUB_CTRL3↑	GND
9	IREF_RESERVE↑		GND	IREF_RESERVE↑		GND
10		ITC_1N↑	GND		IREF_1N↑	GND

CNF201

	A	B	BG	C	D	DG
1	GBE3_TRX0P↑	GBE3_TRX0N↑	GND	GBE3_TRX1P↑	GBE3_TRX1N↑	GND
2	GBE3_TRX2P↑	GBE3_TRX2N↑	GND	GBE3_TRX3P↑	GBE3_TRX3N↑	GND
3	GBE2_LED_L↑	GBE2_LED_R↑	GND	GBE3_LED_L↑	GBE3_LED_R↑	GND
4	GBE2_TRX0P↑	GBE2_TRX0N↑	GND	GBE2_TRX1P↑	GBE2_TRX1N↑	GND
5	GBE2_TRX2P↑	GBE2_TRX2N↑	GND	GBE2_TRX3P↑	GBE2_TRX3N↑	GND
6	GBE1_TRX0P↑	GBE1_TRX0N↑	GND	GBE1_TRX1P↑	GBE1_TRX1N↑	GND
7	GBE1_TRX2P↑	GBE1_TRX2N↑	GND	GBE1_TRX3P↑	GBE1_TRX3N↑	GND
8	GBE0_LED_L↑	GBE0_LED_R↑	GND	GBE1_LED_L↑	GBE1_LED_R↑	GND
9	GBE0_TRX0P↑	GBE0_TRX0N↑	GND	GBE0_TRX1P↑	GBE0_TRX1N↑	GND
10	GBE0_TRX2P↑	GBE0_TRX2N↑	GND	GBE0_TRX3P↑	GBE0_TRX3N↑	GND

CNG201 NM

	A	B	BG	C	D	DG
1	IEXTBUS_CS0↑	IEXTBUS_CS1↑	GND	IEXTBUS_CS2↑	IEXTBUS_CS3↑	GND
2	IEXTBUS_OE↑	IEXTBUS_WE↑	GND	IEXTBUS_BE0↑	IEXTBUS_BE1↑	GND
3	IEXTBUS_A14↑	IEXTBUS_A15↑	GND	IEXTBUS_D14↑	IEXTBUS_D15↑	GND
4	IEXTBUS_A12↑	IEXTBUS_A13↑	GND	IEXTBUS_D12↑	IEXTBUS_D13↑	GND
5	IEXTBUS_A10↑	IEXTBUS_A11↑	GND	IEXTBUS_D10↑	IEXTBUS_D11↑	GND
6	IEXTBUS_A8↑	IEXTBUS_A9↑	GND	IEXTBUS_D8↑	IEXTBUS_D9↑	GND
7	IEXTBUS_A6↑	IEXTBUS_A7↑	GND	IEXTBUS_D6↑	IEXTBUS_D7↑	GND
8	IEXTBUS_A4↑	IEXTBUS_A5↑	GND	IEXTBUS_D4↑	IEXTBUS_D5↑	GND
9	IEXTBUS_A2↑	IEXTBUS_A3↑	GND	IEXTBUS_D2↑	IEXTBUS_D3↑	GND
10	IEXTBUS_A0↑	IEXTBUS_A1↑	GND	IEXTBUS_D0↑	IEXTBUS_D1↑	GND

CNJ201 NM

	A	B	BG	C	D	DG
1	I3NET3_TRX2P↑	I3NET3_TRX2N↑	GND	I3NET3_TRX3P↑	I3NET3_TRX3N↑	GND
2	I3NET3_TRX0P↑	I3NET3_TRX0N↑	GND	I3NET3_TRX1P↑	I3NET3_TRX1N↑	GND
3	INET7_TRX2P	INET7_TRX2N	GND	INET7_TRX3P	INET7_TRX3N	GND
4	INET7_TRX0P	INET7_TRX0N	GND	INET7_TRX1P	INET7_TRX1N	GND
5			GND			GND
6	MVE_INET1_TRX2P	MVE_INET1_TRX2N	GND	MVE_INET1_TRX3P	MVE_INET1_TRX3N	GND
7	MVE_INET1_TRX0P	MVE_INET1_TRX0N	GND	MVE_INET1_TRX1P	MVE_INET1_TRX1N	GND
8	MVE_INET0_TRX2P	MVE_INET0_TRX2N	GND	MVE_INET0_TRX3P	MVE_INET0_TRX3N	GND
9	MVE_INET0_TRX0P	MVE_INET0_TRX0N	GND	MVE_INET0_TRX1P	MVE_INET0_TRX1N	GND
10	IEXTBUS_CS4↑		GND	IEXTBUS_INT↑	IEXTBUS_BUSY↑	GND

CNL201

	A	B	BG	C	D	DG
1	IBD_EXT_19F↑	IBD_EXT_18F↑	GND	IBD_EXT_19R↑	IBD_EXT_18R↑	GND
2	IBD_EXT_17F↑	IBD_EXT_16F↑	GND	IBD_EXT_17R↑	IBD_EXT_16R↑	GND
3	IBD_EXT_15F↑	IBD_EXT_14F↑	GND	IBD_EXT_15R↑	IBD_EXT_14R↑	GND
4	IBD_EXT_13F↑	IBD_EXT_12F↑	GND	IBD_EXT_13R↑	IBD_EXT_12R↑	GND
5	IBD_EXT_11F↑	IBD_EXT_10F↑	GND	IBD_EXT_11R↑	IBD_EXT_10R↑	GND
6	IBD_EXT_9F↑	IBD_EXT_8F↑	GND	IBD_EXT_9R↑	IBD_EXT_8R↑	GND
7	IBD_EXT_7F↑	IBD_EXT_6F↑	GND	IBD_EXT_7R↑	IBD_EXT_6R↑	GND
8	IBD_EXT_5F↑	IBD_EXT_4F↑	GND	IBD_EXT_5R↑	IBD_EXT_4R↑	GND
9	IBD_EXT_3F↑	BD_EXT_2F	GND	IBD_EXT_3R↑	IBD_EXT_2R↑	GND
10	BD_EXT_1F	BD_EXT_0F	GND	IBD_EXT_1R↑	BD_EXT_0R	GND

CNM201

	A	B	BG	C	D	DG
1	MVE_GP12_OUT6↑	MVE_GP12_IN6↑	GND	MVE_GP11_OUT6↑	MVE_GP11_IN6↑	GND
2	MVE_GP12_OUT5↑	MVE_GP12_IN5↑	GND	MVE_GP11_OUT5↑	MVE_GP11_IN5↑	GND
3	MVE_GP12_OUT4↑	MVE_GP12_IN4↑	GND	MVE_GP11_OUT4↑	MVE_GP11_IN4↑	GND
4	MVE_GP12_OUT3↑	MVE_GP12_IN3↑	GND	MVE_GP11_OUT3↑	MVE_GP11_IN3↑	GND
5	MVE_GP12_OUT2↑	MVE_GP12_IN2↑	GND	MVE_GP11_OUT2↑	MVE_GP11_IN2↑	GND
6	MVE_GP12_OUT1↑	MVE_GP12_IN1↑	GND	MVE_GP11_OUT1↑	MVE_GP11_IN1↑	GND
7	MVE_RS422_4_TXP↑	MVE_RS422_4_TXN↑	GND	MVE_RS422_4_RXP↑	MVE_RS422_4_RXN↑	GND
8	MVE_RS422_3_TXP↑	MVE_RS422_3_TXN↑	GND	MVE_RS422_3_RXP↑	MVE_RS422_3_RXN↑	GND
9	MVE_RS422_2_TXP↑	MVE_RS422_2_TXN↑	GND	MVE_RS422_2_RXP↑	MVE_RS422_2_RXN↑	GND
10	MVE_RS422_1_TXP↑	MVE_RS422_1_TXN↑	GND	MVE_RS422_1_RXP↑	MVE_RS422_1_RXN↑	GND

CNN201

	A	B	BG	C	D	DG
1	IFAN5_PULSE5↑	IFAN6_PULSE1↑	GND	IFAN6_PULSE2↑	IFAN6_PULSE3↑	GND
2	IFAN5_PULSE1↑	IFAN5_PULSE2↑	GND	IFAN5_PULSE3↑	IFAN5_PULSE4↑	GND
3	IFAN4_PULSE2↑	IFAN4_PULSE3↑	GND	IFAN4_PULSE4↑	IFAN4_PULSE5↑	GND
4	IFAN3_PULSE3↑	IFAN3_PULSE4↑	GND	IFAN3_PULSE5↑	IFAN4_PULSE1↑	GND
5	IFAN2_PULSE4↑	IFAN2_PULSE5↑	GND	IFAN3_PULSE1↑	IFAN3_PULSE2↑	GND
6	IFAN1_PULSE5↑	IFAN2_PULSE1↑	GND	IFAN2_PULSE2↑	IFAN2_PULSE3↑	GND
7	IFAN1_PULSE1↑	IFAN1_PULSE2↑	GND	IFAN1_PULSE3↑	IFAN1_PULSE4↑	GND
8	IPOW_SEG0↑	GND IPOW_SEG1↑	GND			GND
9	MVE_GP12_OUT8↑	MVE_GP12_IN8↑	GND	MVE_GP11_OUT8↑	MVE_GP11_IN8↑	GND
10	MVE_GP12_OUT7↑	MVE_GP12_IN7↑	GND	MVE_GP11_OUT7↑	MVE_GP11_IN7↑	GND

CNB101 CNB201

CNE101 CNE201 CNF101 CNF201 CNG101 CNG201

CNJ101

CNL101 CNL201 CNM101 CNM201 CNN101 CNN201 CNP101

DME CA/DME CA IF

SLOT1 **MB-1151 (1/16)**

BOARD NO. 1-879-563-11

MVS-8000X_MB-1151_001_1

A B C D E F G H

1 2 3 4 5

MB-1151 (2/16)

A SIDE DVP-53

CNB102

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET3	DC_ENBL1	GND	(X/XSF)	FUSE+12V	GND
6	BD_EXT_1F	BD_EXT_1R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	MVE_RESET0		GND	ICN_SCL)	ICN_SDA)	GND
10	IMVE_ID0)	IMVE_ID1)	GND	IMVE_ID2)	IMVE_ID3)	GND

CNC102

	A	B	BG	C	D	DG
1	VCLK1P	VCLK1N	GND			GND
2	FD9P	FD9N	GND	VD11P	VD11N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
7	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
8	MVE_INET0_TRX0P	MVE_INET0_TRX0N	GND	MVE_INET0_TRX1P	MVE_INET0_TRX1N	GND
9	MVE_INET0_TRX2P	MVE_INET0_TRX2N	GND	MVE_INET0_TRX3P	MVE_INET0_TRX3N	GND
10			GND			GND

CNE102

	A	B	BG	C	D	DG
1			GND			GND
2			GND	DME2_EXTIN_4VP	DME2_EXTIN_4VN	GND
3			GND			GND
4	DME2_MON_OUT4P	DME2_MON_OUT4N	GND	DME2_EXTIN_2VP	DME2_EXTIN_2VN	GND
5	DME2_MON_OUT2P	DME2_MON_OUT2N	GND			GND
6	DME2_MON_OUT3P	DME2_MON_OUT3N	GND			GND
7	DME2_MON_OUT1P	DME2_MON_OUT1N	GND			GND
8			GND	DME2_EXTIN_3VP	DME2_EXTIN_3VN	GND
9			GND			GND
10			GND	DME2_EXTIN_1VP	DME2_EXTIN_1VN	GND

CNJ102

	A	B	BG	C	D	DG
1	DME2_MVEO_4KP	DME2_MVEO_4KN	GND	DME2_MVEI_4KP	DME2_MVEI_4KN	GND
2	DME2_MVEO_2KP	DME2_MVEO_2KN	GND	DME2_MVEI_2KP	DME2_MVEI_2KN	GND
3			GND			GND
4	DME2_MVEO_4VP	DME2_MVEO_4VN	GND	DME2_MVEI_4VP	DME2_MVEI_4VN	GND
5	DME2_MVEO_2VP	DME2_MVEO_2VN	GND	DME2_MVEI_2VP	DME2_MVEI_2VN	GND
6	DME2_MVEO_3KP	DME2_MVEO_3KN	GND	DME2_MVEI_3KP	DME2_MVEI_3KN	GND
7	DME2_MVEO_1KP	DME2_MVEO_1KN	GND	DME2_MVEI_1KP	DME2_MVEI_1KN	GND
8			GND			GND
9	DME2_MVEO_3VP	DME2_MVEO_3VN	GND	DME2_MVEI_3VP	DME2_MVEI_3VN	GND
10	DME2_MVEO_1VP	DME2_MVEO_1VN	GND	DME2_MVEI_1VP	DME2_MVEI_1VN	GND

CNK102

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	DME2_EFVMO_LOCK	DME2_EFVMO_PRST	GND	DME1_EFVMO_LOCK	DME1_EFVMO_PRST	GND
4	DME2_EFVMO_0P	DME2_EFVMO_0N	GND	DME1_EFVMO_0P	DME1_EFVMO_0N	GND
5	DME2_EFVMO_1P	DME2_EFVMO_1N	GND	DME1_EFVMO_1P	DME1_EFVMO_1N	GND
6	DME2_EFVMO_2P	DME2_EFVMO_2N	GND	DME1_EFVMO_2P	DME1_EFVMO_2N	GND
7	DME2_EFVMO_3P	DME2_EFVMO_3N	GND	DME1_EFVMO_3P	DME1_EFVMO_3N	GND
8	DME2_EFVMO_4P	DME2_EFVMO_4N	GND	DME1_EFVMO_4P	DME1_EFVMO_4N	GND
9	DME2_EFVMO_5P	DME2_EFVMO_5N	GND	DME1_EFVMO_5P	DME1_EFVMO_5N	GND
10	DME2_EFVMO_6P	DME2_EFVMO_6N	GND	DME1_EFVMO_6P	DME1_EFVMO_6N	GND

CNP102

	A	B	BG	C	D	DG
1	DME2_EFVMO_CLKP	DME2_EFVMO_CLKN	GND	DME1_EFVMO_CLKP	DME1_EFVMO_CLKN	GND
2	DME2_EFVMO_7P	DME2_EFVMO_7N	GND	DME1_EFVMO_7P	DME1_EFVMO_7N	GND
3	DME2_EFVMO_8P	DME2_EFVMO_8N	GND	DME1_EFVMO_8P	DME1_EFVMO_8N	GND
4	DME2_EFVMO_9P	DME2_EFVMO_9N	GND	DME1_EFVMO_9P	DME1_EFVMO_9N	GND
5	DME2_EFVMO_10P	DME2_EFVMO_10N	GND	DME1_EFVMO_10P	DME1_EFVMO_10N	GND
6	DME2_EFVMO_11P	DME2_EFVMO_11N	GND	DME1_EFVMO_11P	DME1_EFVMO_11N	GND
7	DME2_EFVMO_12P	DME2_EFVMO_12N	GND	DME1_EFVMO_12P	DME1_EFVMO_12N	GND
8	DME2_RESERVE1	DME2_RESERVE2	GND	DME1_RESERVE1	DME1_RESERVE2	GND
9			GND			GND
10			GND			GND

B SIDE CNI-37B

CNB202

	A	B	BG	C	D	DG
1	IMVE_ID0)	IMVE_ID1)	GND	IMVE_ID2)	IMVE_ID3)	GND
2	MVE_RESET0		GND	ICN_SCL)	ICN_SDA)	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_1F	BD_EXT_1R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	RESET3	DC_ENBL1	GND	(X/XSF)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF202

	A	B	BG	C	D	DG
1			GND	DME_IN11P	DME_IN11N	GND
2			GND	DME_IN12P	DME_IN12N	GND
3			GND	DME_IN13P	DME_IN13N	GND
4			GND	DME_IN14P	DME_IN14N	GND
5			GND	DME_IN15P	DME_IN15N	GND
6			GND	DME_IN16P	DME_IN16N	GND
7			GND	DME_IN17P	DME_IN17N	GND
8			GND	DME_IN18P	DME_IN18N	GND
9			GND	DME_IN19P	DME_IN19N	GND
10			GND	DME_IN20P	DME_IN20N	GND

CNM202

	A	B	BG	C	D	DG
1			GND	DME_IN01P	DME_IN01N	GND
2			GND	DME_IN02P	DME_IN02N	GND
3			GND	DME_IN03P	DME_IN03N	GND
4			GND	DME_IN04P	DME_IN04N	GND
5			GND	DME_IN05P	DME_IN05N	GND
6			GND	DME_IN06P	DME_IN06N	GND
7			GND	DME_IN07P	DME_IN07N	GND
8			GND	DME_IN08P	DME_IN08N	GND
9			GND	DME_IN09P	DME_IN09N	GND
10			GND	DME_IN10P	DME_IN10N	GND

DME2/DME SLOT 2 IN1-20

MB-1151 (2/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_2

4-172

MB-1151 (3/16)

A SIDE DVP-53

CNB103

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET3	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
6	BD_EXT_2F	BD_EXT_2R	GND	SD/HD0	SD/HD0	GND
7	(SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	MVE_RESET0		GND	(CN_SCL)	(CN_SDA)	GND
10	(MVE_ID0)	(MVE_ID1)	GND	(MVE_ID2)	(MVE_ID3)	GND

CNC103

	A	B	BG	C	D	DG
1	VCLK3P	VCLK3N	GND			GND
2	FD8P	FD8N	GND	VD10P	VD10N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET2_TRX0P	INET2_TRX0N	GND	INET2_TRX1P	INET2_TRX1N	GND
7	INET2_TRX2P	INET2_TRX2N	GND	INET2_TRX3P	INET2_TRX3N	GND
8	MVE_INET1_TRX0P	MVE_INET1_TRX0N	GND	MVE_INET1_TRX1P	MVE_INET1_TRX1N	GND
9	MVE_INET1_TRX2P	MVE_INET1_TRX2N	GND	MVE_INET1_TRX3P	MVE_INET1_TRX3N	GND
10			GND			GND

CNE103

	A	B	BG	C	D	DG
1			GND			GND
2			GND	DME1_EXTIN_4VP	DME1_EXTIN_4VN	GND
3			GND			GND
4	DME1_MON_OUT4P	DME1_MON_OUT4N	GND	DME1_EXTIN_2VP	DME1_EXTIN_2VN	GND
5	DME1_MON_OUT2P	DME1_MON_OUT2N	GND			GND
6	DME1_MON_OUT3P	DME1_MON_OUT3N	GND			GND
7	DME1_MON_OUT1P	DME1_MON_OUT1N	GND			GND
8			GND	DME1_EXTIN_3VP	DME1_EXTIN_3VN	GND
9			GND			GND
10			GND	DME1_EXTIN_1VP	DME1_EXTIN_1VN	GND

CNJ103

	A	B	BG	C	D	DG
1	DME1_MVEO_4KP	DME1_MVEO_4KN	GND	DME1_MVEI_4KP	DME1_MVEI_4KN	GND
2	DME1_MVEO_2KP	DME1_MVEO_2KN	GND	DME1_MVEI_2KP	DME1_MVEI_2KN	GND
3			GND			GND
4	DME1_MVEO_4VP	DME1_MVEO_4VN	GND	DME1_MVEI_4VP	DME1_MVEI_4VN	GND
5	DME1_MVEO_2VP	DME1_MVEO_2VN	GND	DME1_MVEI_2VP	DME1_MVEI_2VN	GND
6	DME1_MVEO_3KP	DME1_MVEO_3KN	GND	DME1_MVEI_3KP	DME1_MVEI_3KN	GND
7	DME1_MVEO_1KP	DME1_MVEO_1KN	GND	DME1_MVEI_1KP	DME1_MVEI_1KN	GND
8			GND			GND
9	DME1_MVEO_3VP	DME1_MVEO_3VN	GND	DME1_MVEI_3VP	DME1_MVEI_3VN	GND
10	DME1_MVEO_1VP	DME1_MVEO_1VN	GND	DME1_MVEI_1VP	DME1_MVEI_1VN	GND

CNK103

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	DME1_EFVMO_LOCK	DME1_EFVMO_PRST	GND	DME2_EFVMO_LOCK	DME2_EFVMO_PRST	GND
4	DME1_EFVMO_0P	DME1_EFVMO_0N	GND	DME2_EFVMO_0P	DME2_EFVMO_0N	GND
5	DME1_EFVMO_1P	DME1_EFVMO_1N	GND	DME2_EFVMO_1P	DME2_EFVMO_1N	GND
6	DME1_EFVMO_2P	DME1_EFVMO_2N	GND	DME2_EFVMO_2P	DME2_EFVMO_2N	GND
7	DME1_EFVMO_3P	DME1_EFVMO_3N	GND	DME2_EFVMO_3P	DME2_EFVMO_3N	GND
8	DME1_EFVMO_4P	DME1_EFVMO_4N	GND	DME2_EFVMO_4P	DME2_EFVMO_4N	GND
9	DME1_EFVMO_5P	DME1_EFVMO_5N	GND	DME2_EFVMO_5P	DME2_EFVMO_5N	GND
10	DME1_EFVMO_6P	DME1_EFVMO_6N	GND	DME2_EFVMO_6P	DME2_EFVMO_6N	GND

CNP103

	A	B	BG	C	D	DG
1	DME1_EFVMO_CLKP	DME1_EFVMO_CLKN	GND	DME2_EFVMO_CLKP	DME2_EFVMO_CLKN	GND
2	DME1_EFVMO_7P	DME1_EFVMO_7N	GND	DME2_EFVMO_7P	DME2_EFVMO_7N	GND
3	DME1_EFVMO_8P	DME1_EFVMO_8N	GND	DME2_EFVMO_8P	DME2_EFVMO_8N	GND
4	DME1_EFVMO_9P	DME1_EFVMO_9N	GND	DME2_EFVMO_9P	DME2_EFVMO_9N	GND
5	DME1_EFVMO_10P	DME1_EFVMO_10N	GND	DME2_EFVMO_10P	DME2_EFVMO_10N	GND
6	DME1_EFVMO_11P	DME1_EFVMO_11N	GND	DME2_EFVMO_11P	DME2_EFVMO_11N	GND
7	DME1_EFVMO_12P	DME1_EFVMO_12N	GND	DME2_EFVMO_12P	DME2_EFVMO_12N	GND
8	DME1_RESERVE1	DME1_RESERVE2	GND	DME2_RESERVE1	DME2_RESERVE2	GND
9			GND			GND
10			GND			GND

B SIDE CNO-37A

CNB203

	A	B	BG	C	D	DG
1	(MVE_ID0)	(MVE_ID1)	GND	(MVE_ID2)	(MVE_ID3)	GND
2	MVE_RESET0		GND	(CN_SCL)	(CN_SDA)	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_2F	BD_EXT_2R	GND	SD/HD0	SD/HD0	GND
6	RESET3	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF203

	A	B	BG	C	D	DG
1			GND	DME_OUT11P	DME_OUT11N	GND
2			GND	DME_OUT12P	DME_OUT12N	GND
3			GND	DME_OUT13P	DME_OUT13N	GND
4			GND	DME_OUT14P	DME_OUT14N	GND
5			GND	DME_OUT15P	DME_OUT15N	GND
6			GND	DME_OUT16P	DME_OUT16N	GND
7			GND	DME_OUT17P	DME_OUT17N	GND
8			GND	DME_OUT18P	DME_OUT18N	GND
9			GND	DME_OUT19P	DME_OUT19N	GND
10			GND	DME_OUT20P	DME_OUT20N	GND

CNM203

	A	B	BG	C	D	DG
1			GND	DME_OUT01P	DME_OUT01N	GND
2			GND	DME_OUT02P	DME_OUT02N	GND
3			GND	DME_OUT03P	DME_OUT03N	GND
4			GND	DME_OUT04P	DME_OUT04N	GND
5			GND	DME_OUT05P	DME_OUT05N	GND
6			GND	DME_OUT06P	DME_OUT06N	GND
7			GND	DME_OUT07P	DME_OUT07N	GND
8			GND	DME_OUT08P	DME_OUT08N	GND
9			GND	DME_OUT09P	DME_OUT09N	GND
10			GND	DME_OUT10P	DME_OUT10N	GND

SLOT 3
DME1/DME OUT1-20

MB-1151 (3/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_3

4-173

A SIDE XPT-32

B SIDE ---

CNB104

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND		FUSE+12V	GND
6	BD_EXT_3F	BD_EXT_3R	GND			GND
7	GND (SLOT_N+0)	GND (SLOT_N+1)	GND	(SLOT_N+2)	GND (SLOT_N+3)	GND
8	GND (SLOT_N+4)	GND (SLOT_N+5)	GND	GND (SLOT_N+6)	GND (SLOT_N+7)	GND
9	VCLK0P	VCLK0N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
10	FD7P	FD7N	GND	VD1P	VD1N	GND

CNC104

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK4p	XPT_CLK4n	GND	XPT_CS4An	XPT_CS4Bn	GND
10	XPT_WE4n	XPT_WAIT4n	GND	XPT_OEn	XPT_RESET2n	GND

CND104

	A	B	BG	C	D	DG
1	DME_UTIL1BP	DME_UTIL1BN	GND	DME_UTIL2BP	DME_UTIL2BN	GND
2	DME_UTIL1AP	DME_UTIL1AN	GND	DME_UTIL2AP	DME_UTIL2AN	GND
3	DME1_MON_OUT4P	DME1_MON_OUT4N	GND	DME2_MON_OUT4P	DME2_MON_OUT4N	GND
4	DME1_MON_OUT2P	DME1_MON_OUT2N	GND	DME2_MON_OUT2P	DME2_MON_OUT2N	GND
5	DME1_MON_OUT3P	DME1_MON_OUT3N	GND	DME2_MON_OUT3P	DME2_MON_OUT3N	GND
6	DME1_MON_OUT1P	DME1_MON_OUT1N	GND	DME2_MON_OUT1P	DME2_MON_OUT1N	GND
7	DME_IN20P	DME_IN20N	GND	DME_IN15P	DME_IN15N	GND
8	DME_IN19P	DME_IN19N	GND	DME_IN14P	DME_IN14N	GND
9	DME_IN18P	DME_IN18N	GND	DME_IN13P	DME_IN13N	GND
10	DME_IN17P	DME_IN17N	GND	DME_IN12P	DME_IN12N	GND

CNE104

	A	B	BG	C	D	DG
1	DME_IN16P	DME_IN16N	GND	DME_IN11P	DME_IN11N	GND
2	ME1_SEND4KP	ME1_SEND4KN	GND	DME2_MVEO_4KP	DME2_MVEO_4KN	GND
3	ME1_SEND2KP	ME1_SEND2KN	GND	DME2_MVEO_2KP	DME2_MVEO_2KN	GND
4	ME1_SEND4VP	ME1_SEND4VN	GND	DME2_MVEO_4VP	DME2_MVEO_4VN	GND
5	ME1_SEND2VP	ME1_SEND2VN	GND	DME2_MVEO_2VP	DME2_MVEO_2VN	GND
6	ME2_SEND4KP	ME2_SEND4KN	GND	DME1_MVEO_4KP	DME1_MVEO_4KN	GND
7	ME2_SEND2KP	ME2_SEND2KN	GND	DME1_MVEO_2KP	DME1_MVEO_2KN	GND
8	ME2_SEND4VP	ME2_SEND4VN	GND	DME1_MVEO_4VP	DME1_MVEO_4VN	GND
9	ME2_SEND2VP	ME2_SEND2VN	GND	DME1_MVEO_2VP	DME1_MVEO_2VN	GND
10	ME2_SEND3KP	ME2_SEND3KN	GND	DME1_MVEO_3KP	DME1_MVEO_3KN	GND

CNG104

	A	B	BG	C	D	DG
1	DME_MON8P	DME_MON8N	GND	DME2_EXTIN_4VP	DME2_EXTIN_4VN	GND
2	DME_MON7P	DME_MON7N	GND	DME2_EXTIN_2VP	DME2_EXTIN_2VN	GND
3	DME_MON6P	DME_MON6N	GND	DME2_EXTIN_3VP	DME2_EXTIN_3VN	GND
4	DME_MON5P	DME_MON5N	GND	DME2_EXTIN_1VP	DME2_EXTIN_1VN	GND
5	XPT_OUT005P	XPT_OUT005N	GND	DME1_EXTIN_4VP	DME1_EXTIN_4VN	GND
6	XPT_OUT006P	XPT_OUT006N	GND	DME1_EXTIN_2VP	DME1_EXTIN_2VN	GND
7	XPT_OUT007P	XPT_OUT007N	GND	DME1_EXTIN_3VP	DME1_EXTIN_3VN	GND
8	XPT_OUT008P	XPT_OUT008N	GND	DME1_EXTIN_1VP	DME1_EXTIN_1VN	GND
9	ME1_MVE4KP	ME1_MVE4KN	GND	ME2_MVE4KP	ME2_MVE4KN	GND
10	ME1_MVE2KP	ME1_MVE2KN	GND	ME2_MVE2KP	ME2_MVE2KN	GND

CNJ104

	A	B	BG	C	D	DG
1	ME2_MVE4VP	ME2_MVE4VN	GND	DME_OUT20P	DME_OUT20N	GND
2	ME1_MVE4VP	ME1_MVE4VN	GND	DME_OUT19P	DME_OUT19N	GND
3	PP_MVE4KP	PP_MVE4KN	GND	DME_OUT18P	DME_OUT18N	GND
4	PP_MVE2KP	PP_MVE2KN	GND	DME_OUT17P	DME_OUT17N	GND
5	PP_MVE4VP	PP_MVE4VN	GND	DME_OUT16P	DME_OUT16N	GND
6	PP_MVE2VP	PP_MVE2VN	GND	DME_OUT15P	DME_OUT15N	GND
7	PP_MVE3KP	PP_MVE3KN	GND	DME_OUT14P	DME_OUT14N	GND
8	PP_MVE1KP	PP_MVE1KN	GND	DME_OUT13P	DME_OUT13N	GND
9	PP_MVE3VP	PP_MVE3VN	GND	DME_OUT12P	DME_OUT12N	GND
10	PP_MVE1VP	PP_MVE1VN	GND	DME_OUT11P	DME_OUT11N	GND

CNK104

	A	B	BG	C	D	DG
1	PP_SEND4KP	PP_SEND4KN	GND	ME2_SEND1KP	ME2_SEND1KN	GND
2	PP_SEND2KP	PP_SEND2KN	GND	ME2_SEND3VP	ME2_SEND3VN	GND
3	PP_SEND4VP	PP_SEND4VN	GND	ME2_SEND1VP	ME2_SEND1VN	GND
4	PP_SEND2VP	PP_SEND2VN	GND	DME1_MVEO_1KP	DME1_MVEO_1KN	GND
5	PP_SEND3KP	PP_SEND3KN	GND	DME1_MVEO_3VP	DME1_MVEO_3VN	GND
6	PP_SEND1KP	PP_SEND1KN	GND	DME1_MVEO_1VP	DME1_MVEO_1VN	GND
7	PP_SEND3VP	PP_SEND3VN	GND	DME2_MVEO_3KP	DME2_MVEO_3KN	GND
8	PP_SEND1VP	PP_SEND1VN	GND	DME2_MVEO_1KP	DME2_MVEO_1KN	GND
9	ME1_SEND3KP	ME1_SEND3KN	GND	DME2_MVEO_3VP	DME2_MVEO_3VN	GND
10	ME1_SEND1KP	ME1_SEND1KN	GND	DME2_MVEO_1VP	DME2_MVEO_1VN	GND

CNL104

	A	B	BG	C	D	DG
1	ME1_SEND3VP	ME1_SEND3VN	GND	DME_IN10P	DME_IN10N	GND
2	ME1_SEND1VP	ME1_SEND1VN	GND	DME_IN09P	DME_IN09N	GND
3	IN008BP	IN008BN	GND	DME_IN08P	DME_IN08N	GND
4	IN007BP	IN007BN	GND	DME_IN07P	DME_IN07N	GND
5	IN006BP	IN006BN	GND	DME_IN06P	DME_IN06N	GND
6	IN005BP	IN005BN	GND	DME_IN05P	DME_IN05N	GND
7	IN004BP	IN004BN	GND	DME_IN04P	DME_IN04N	GND
8	IN003BP	IN003BN	GND	DME_IN03P	DME_IN03N	GND
9	IN002BP	IN002BN	GND	DME_IN02P	DME_IN02N	GND
10	IN001BP	IN001BN	GND	DME_IN01P	DME_IN01N	GND

CNN104

	A	B	BG	C	D	DG
1	DME1_MVEI_4KP	DME1_MVEI_4KN	GND	DME2_MVEI_4KP	DME2_MVEI_4KN	GND
2	DME1_MVEI_2KP	DME1_MVEI_2KN	GND	DME2_MVEI_2KP	DME2_MVEI_2KN	GND
3	DME1_MVEI_4VP	DME1_MVEI_4VN	GND	DME2_MVEI_4VP	DME2_MVEI_4VN	GND
4	DME1_MVEI_2VP	DME1_MVEI_2VN	GND	DME2_MVEI_2VP	DME2_MVEI_2VN	GND
5	ME1_MVE2VP	ME1_MVE2VN	GND	DME2_MVEI_3KP	DME2_MVEI_3KN	GND
6	ME1_MVE3KP	ME1_MVE3KN	GND	DME2_MVEI_1KP	DME2_MVEI_1KN	GND
7	ME1_MVE1KP	ME1_MVE1KN	GND	DME2_MVEI_3VP	DME2_MVEI_3VN	GND
8	ME1_MVE3VP	ME1_MVE3VN	GND	DME2_MVEI_1VP	DME2_MVEI_1VN	GND
9	ME1_MVE1VP	ME1_MVE1VN	GND	DME_OUT10P	DME_OUT10N	GND
10	ME2_MVE2VP	ME2_MVE2VN	GND	DME_OUT09P	DME_OUT09N	GND

CNP104

	A	B	BG	C	D	DG
1	ME2_MVE3KP	ME2_MVE3KN	GND	DME_OUT08P	DME_OUT08N	GND
2	ME2_MVE1KP	ME2_MVE1KN	GND	DME_OUT07P	DME_OUT07N	GND
3	ME2_MVE3VP	ME2_MVE3VN	GND	DME_OUT06P	DME_OUT06N	GND
4	ME2_MVE1VP	ME2_MVE1VN	GND	DME_OUT05P	DME_OUT05N	GND
5	DME1_MVEI_3KP	DME1_MVEI_3KN	GND	DME_OUT04P	DME_OUT04N	GND
6	DME1_MVEI_1KP	DME1_MVEI_1KN	GND	DME_OUT03P	DME_OUT03N	GND
7	DME1_MVEI_3VP	DME1_MVEI_3VN	GND	DME_OUT02P	DME_OUT02N	GND
8	DME1_MVEI_1VP	DME1_MVEI_1VN	GND	DME_OUT01P	DME_OUT01N	GND
9	XPT_OUT069P	XPT_OUT069N	GND	XPT_OUT079P	XPT_OUT079N	GND
10	XPT_OUT070P	XPT_OUT070N	GND	XPT_OUT080P	XPT_OUT080N	GND

CNB104 | CNC104 | CND104 | CNE104 | CNG104 | CNJ104 | CNK104 | CNL104 | CNN104 | CNP104

SLOT 4
DME IF XPT/---

MB-1151 (4/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_4

A B C D E F G H

MB-1151 (5/16)

A SIDE MIX-53

CNB105

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET2	DC_ENBL1	GND	(X/XSF)	FUSE+12V	GND
6	BD_EXT_4F	BD_EXT_4R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
7	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNC105

	A	B	BG	C	D	DG
1	VCLK5P	VCLK5N	GND			GND
2	FD6P	FD6N	GND	VD9P	VD9N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET3_TRX0P	INET3_TRX0N	GND	INET3_TRX1P	INET3_TRX1N	GND
7	INET3_TRX2P	INET3_TRX2N	GND	INET3_TRX3P	INET3_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE105

	A	B	BG	C	D	DG
1	(KEY6_SRCBP)	(KEY6_SRCBN)	GND	(KEY2_SRCBP)	(KEY2_SRCBN)	GND
2	ME2_KEY6_SRCAP	ME2_KEY6_SRCAN	GND	ME2_KEY2_SRCAP	ME2_KEY2_SRCAN	GND
3	(KEY6_FILBP)	(KEY6_FILBN)	GND	(KEY2_FILBP)	(KEY2_FILBN)	GND
4	ME2_OUT6P	ME2_OUT6N	GND	ME2_KEY2_FILAP	ME2_KEY2_FILAN	GND
5	ME2_OUT7P	ME2_OUT7N	GND	ME2_KEY6_FILAP	ME2_KEY6_FILAN	GND
6	ME2_OUT6P	ME2_OUT6N	GND	(KEY5_SRCBP)	(KEY5_SRCBN)	GND
7	ME2_OUT5P	ME2_OUT5N	GND	(KEY1_SRCBP)	(KEY1_SRCBN)	GND
8	ME2_KEY5_SRCAP	ME2_KEY5_SRCAN	GND	ME2_KEY1_SRCAP	ME2_KEY1_SRCAN	GND
9	(KEY5_FILBP)	(KEY5_FILBN)	GND	(KEY1_FILBP)	(KEY1_FILBN)	GND
10	ME2_KEY5_FILAP	ME2_KEY5_FILAN	GND	ME2_KEY1_FILAP	ME2_KEY1_FILAN	GND

CNG105

	A	B	BG	C	D	DG
1			GND	ME2_EXT_DMEBP	ME2_EXT_DMEBN	GND
2	ME2_BGCOL2P)	(ME2_BGCOL2N)	GND	ME2_EXT_DMEAP	ME2_EXT_DMEAN	GND
3	ME2_BGCOLP)	(ME2_BGCOLN)	GND			GND
4			GND	ME2_UTIL3BP	ME2_UTIL3BN	GND
5			GND	ME2_UTIL3AP	ME2_UTIL3AN	GND
6			GND	ME2_UTIL2BP	ME2_UTIL2BN	GND
7	ME2_PROCK2P	ME2_PROCK2N	GND	ME2_UTIL2AP	ME2_UTIL2AN	GND
8	ME2_PROCKP	ME2_PROCKN	GND			GND
9	ME2_PROCV2P	ME2_PROCV2N	GND	ME2_UTIL1BP	ME2_UTIL1BN	GND
10	ME2_PROCVP	ME2_PROCVN	GND	ME2_UTIL1AP	ME2_UTIL1AN	GND

CNJ105

	A	B	BG	C	D	DG
1	ME2_SEND4KP	ME2_SEND4KN	GND	ME2_MVE4KP	ME2_MVE4KN	GND
2	ME2_SEND2KP	ME2_SEND2KN	GND	ME2_MVE2KP	ME2_MVE2KN	GND
3			GND			GND
4	ME2_SEND4VP	ME2_SEND4VN	GND	ME2_MVE4VP	ME2_MVE4VN	GND
5	ME2_SEND2VP	ME2_SEND2VN	GND	ME2_MVE2VP	ME2_MVE2VN	GND
6	ME2_SEND3KP	ME2_SEND3KN	GND	ME2_MVE3KP	ME2_MVE3KN	GND
7	ME2_SEND1KP	ME2_SEND1KN	GND	ME2_MVE1KP	ME2_MVE1KN	GND
8			GND			GND
9	ME2_SEND3VP	ME2_SEND3VN	GND	ME2_MVE3VP	ME2_MVE3VN	GND
10	ME2_SEND1VP	ME2_SEND1VN	GND	ME2_MVE1VP	ME2_MVE1VN	GND

CNL105

	A	B	BG	C	D	DG
1	ME2_EXT_OUT4P	ME2_EXT_OUT4N	GND	ME2_DMEKBP	ME2_DMEKBN	GND
2			GND	ME2_DMEKAP	ME2_DMEKAN	GND
3	ME2_EXT_OUT3P	ME2_EXT_OUT3N	GND			GND
4			GND	ME2_DMEVBP	ME2_DMEVBN	GND
5			GND	ME2_DMEVAP	ME2_DMEVAN	GND
6			GND	ME2_BKGDBBP	ME2_BKGDBBN	GND
7			GND	ME2_BKGDBAP	ME2_BKGDBAN	GND
8	ME2_EXT_OUT2P	ME2_EXT_OUT2N	GND			GND
9			GND	ME2_BKGDABP	ME2_BKGDABN	GND
10	ME2_EXT_OUT1P	ME2_EXT_OUT1N	GND	ME2_BKGDAAP	ME2_BKGDAAN	GND

CNN105

	A	B	BG	C	D	DG
1	(KEY8_SRCBP)	(KEY8_SRCBN)	GND	(KEY4_SRCBP)	(KEY4_SRCBN)	GND
2	ME2_KEY8_SRCAP	ME2_KEY8_SRCAN	GND	ME2_KEY4_SRCAP	ME2_KEY4_SRCAN	GND
3	(KEY8_FILBP)	(KEY8_FILBN)	GND	(KEY4_FILBP)	(KEY4_FILBN)	GND
4	ME2_OUT4P	ME2_OUT4N	GND	ME2_KEY4_FILAP	ME2_KEY4_FILAN	GND
5	ME2_OUT3P	ME2_OUT3N	GND	ME2_KEY8_FILAP	ME2_KEY8_FILAN	GND
6	ME2_OUT2P	ME2_OUT2N	GND	(KEY7_SRCBP)	(KEY7_SRCBN)	GND
7	ME2_OUT1P	ME2_OUT1N	GND	(KEY3_SRCBP)	(KEY3_SRCBN)	GND
8	ME2_KEY7_SRCAP	ME2_KEY7_SRCAN	GND	ME2_KEY3_SRCAP	ME2_KEY3_SRCAN	GND
9	(KEY7_FILBP)	(KEY7_FILBN)	GND	(KEY3_FILBP)	(KEY3_FILBN)	GND
10	ME2_KEY7_FILAP	ME2_KEY7_FILAN	GND	ME2_KEY3_FILAP	ME2_KEY3_FILAN	GND

B SIDE CNI-37

CNB205

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_4F	BD_EXT_4R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	RESET2	DC_ENBL1	GND	(X/XSF)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF205

	A	B	BG	C	D	DG
1			GND	IN011P	IN011N	GND
2			GND	IN012P	IN012N	GND
3			GND	IN013P	IN013N	GND
4			GND	IN014P	IN014N	GND
5			GND	IN015P	IN015N	GND
6			GND	IN016P	IN016N	GND
7			GND	IN017P	IN017N	GND
8			GND	IN018P	IN018N	GND
9			GND	IN019P	IN019N	GND
10			GND	IN020P	IN020N	GND

CNM205

	A	B	BG	C	D	DG
1	IN001BP	IN001BN	GND	IN001AP	IN001AN	GND
2	IN002BP	IN002BN	GND	IN002AP	IN002AN	GND
3	IN003BP	IN003BN	GND	IN003AP	IN003AN	GND
4	IN004BP	IN004BN	GND	IN004AP	IN004AN	GND
5	IN005BP	IN005BN	GND	IN005AP	IN005AN	GND
6	IN006BP	IN006BN	GND	IN006AP	IN006AN	GND
7	IN007BP	IN007BN	GND	IN007AP	IN007AN	GND
8	IN008BP	IN008BN	GND	IN008AP	IN008AN	GND
9			GND	IN009P	IN009N	GND
10			GND	IN010P	IN010N	GND

SLOT 5
ME2/IN1-20

MB-1151 (5/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_5

4-175

MB-1151 (6/16)

A SIDE MIX-53

CNB106

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET2	DC_ENBL1	GND	(X/XSF)	FUSE+12V	GND
6	BD_EXT_5F	BD_EXT_5R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNC106

	A	B	BG	C	D	DG
1	VCLK7P	VCLK7N	GND			GND
2	FD5P	FD5N	GND	VD8P	VD8N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET4_TRX0P	INET4_TRX0N	GND	INET4_TRX1P	INET4_TRX1N	GND
7	INET4_TRX2P	INET4_TRX2N	GND	INET4_TRX3P	INET4_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE106

	A	B	BG	C	D	DG
1	(KEY6_SRCBP)	(KEY6_SRCBN)	GND	(KEY2_SRCBP)	(KEY2_SRCBN)	GND
2	ME1_KEY6_SRCAP	ME1_KEY6_SRCAN	GND	ME1_KEY2_SRCAP	ME1_KEY2_SRCAN	GND
3	(KEY6_F ILBP)	(KEY6_F ILBN)	GND	(KEY2_F ILBP)	(KEY2_F ILBN)	GND
4	ME1_OUT8P	ME1_OUT8N	GND	ME1_KEY2_F ILAP	ME1_KEY2_F ILAN	GND
5	ME1_OUT7P	ME1_OUT7N	GND	ME1_KEY6_F ILAP	ME1_KEY6_F ILAN	GND
6	ME1_OUT6P	ME1_OUT6N	GND	(KEY5_SRCBP)	(KEY5_SRCBN)	GND
7	ME1_OUT5P	ME1_OUT5N	GND	(KEY1_SRCBP)	(KEY1_SRCBN)	GND
8	ME1_KEY5_SRCAP	ME1_KEY5_SRCAN	GND	ME1_KEY1_SRCAP	ME1_KEY1_SRCAN	GND
9	(KEY5_F ILBP)	(KEY5_F ILBN)	GND	(KEY1_F ILBP)	(KEY1_F ILBN)	GND
10	ME1_KEY5_F ILAP	ME1_KEY5_F ILAN	GND	ME1_KEY1_F ILAP	ME1_KEY1_F ILAN	GND

CNG106

	A	B	BG	C	D	DG
1			GND	ME1_EXT_DMEBP	ME1_EXT_DMEBN	GND
2	ME1_BGCOL2P	ME1_BGCOL2N	GND	ME1_EXT_DMEAP	ME1_EXT_DMEAN	GND
3	ME1_BGCOLP	ME1_BGCOLN	GND			GND
4			GND	ME1_UTIL3BP	ME1_UTIL3BN	GND
5			GND	ME1_UTIL3AP	ME1_UTIL3AN	GND
6			GND	ME1_UTIL2BP	ME1_UTIL2BN	GND
7	ME1_PROCK2P	ME1_PROCK2N	GND	ME1_UTIL2AP	ME1_UTIL2AN	GND
8	ME1_PROCKP	ME1_PROCKN	GND			GND
9	ME1_PROCV2P	ME1_PROCV2N	GND	ME1_UTIL1BP	ME1_UTIL1BN	GND
10	ME1_PROCVP	ME1_PROCVN	GND	ME1_UTIL1AP	ME1_UTIL1AN	GND

CNJ106

	A	B	BG	C	D	DG
1	ME1_SEND4KP	ME1_SEND4KN	GND	ME1_MVE4KP	ME1_MVE4KN	GND
2	ME1_SEND2KP	ME1_SEND2KN	GND	ME1_MVE2KP	ME1_MVE2KN	GND
3			GND			GND
4	ME1_SEND4VP	ME1_SEND4VN	GND	ME1_MVE4VP	ME1_MVE4VN	GND
5	ME1_SEND2VP	ME1_SEND2VN	GND	ME1_MVE2VP	ME1_MVE2VN	GND
6	ME1_SEND3KP	ME1_SEND3KN	GND	ME1_MVE3KP	ME1_MVE3KN	GND
7	ME1_SEND1KP	ME1_SEND1KN	GND	ME1_MVE1KP	ME1_MVE1KN	GND
8			GND			GND
9	ME1_SEND3VP	ME1_SEND3VN	GND	ME1_MVE3VP	ME1_MVE3VN	GND
10	ME1_SEND1VP	ME1_SEND1VN	GND	ME1_MVE1VP	ME1_MVE1VN	GND

CNL106

	A	B	BG	C	D	DG
1	ME1_EXT_OUT4P	ME1_EXT_OUT4N	GND	ME1_DMEKBP	ME1_DMEKBN	GND
2			GND	ME1_DMEKAP	ME1_DMEKAN	GND
3	ME1_EXT_OUT3P	ME1_EXT_OUT3N	GND			GND
4			GND	ME1_DMEVBP	ME1_DMEVBN	GND
5			GND	ME1_DMEVAP	ME1_DMEVAN	GND
6			GND	ME1_BKGDBBP	ME1_BKGDBBN	GND
7			GND	ME1_BKGDBAP	ME1_BKGDBAN	GND
8	ME1_EXT_OUT2P	ME1_EXT_OUT2N	GND			GND
9			GND	ME1_BKGDABP	ME1_BKGDABN	GND
10	ME1_EXT_OUT1P	ME1_EXT_OUT1N	GND	ME1_BKGDAAP	ME1_BKGDAAN	GND

CNN106

	A	B	BG	C	D	DG
1	(KEY8_SRCBP)	(KEY8_SRCBN)	GND	(KEY4_SRCBP)	(KEY4_SRCBN)	GND
2	ME1_KEY8_SRCAP	ME1_KEY8_SRCAN	GND	ME1_KEY4_SRCAP	ME1_KEY4_SRCAN	GND
3	(KEY8_F ILBP)	(KEY8_F ILBN)	GND	(KEY4_F ILBP)	(KEY4_F ILBN)	GND
4	ME1_OUT4P	ME1_OUT4N	GND	ME1_KEY4_F ILAP	ME1_KEY4_F ILAN	GND
5	ME1_OUT3P	ME1_OUT3N	GND	ME1_KEY8_F ILAP	ME1_KEY8_F ILAN	GND
6	ME1_OUT2P	ME1_OUT2N	GND	(KEY7_SRCBP)	(KEY7_SRCBN)	GND
7	ME1_OUT1P	ME1_OUT1N	GND	(KEY3_SRCBP)	(KEY3_SRCBN)	GND
8	ME1_KEY7_SRCAP	ME1_KEY7_SRCAN	GND	ME1_KEY3_SRCAP	ME1_KEY3_SRCAN	GND
9	(KEY7_F ILBP)	(KEY7_F ILBN)	GND	(KEY3_F ILBP)	(KEY3_F ILBN)	GND
10	ME1_KEY7_F ILAP	ME1_KEY7_F ILAN	GND	ME1_KEY3_F ILAP	ME1_KEY3_F ILAN	GND

B SIDE CNI-37

CNB206

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_5F	BD_EXT_5R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	RESET2	DC_ENBL1	GND	(X/XSF)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF206

	A	B	BG	C	D	DG
1			GND	IN031P	IN031N	GND
2			GND	IN032P	IN032N	GND
3			GND	IN033P	IN033N	GND
4			GND	IN034P	IN034N	GND
5			GND	IN035P	IN035N	GND
6			GND	IN036P	IN036N	GND
7			GND	IN037P	IN037N	GND
8			GND	IN038P	IN038N	GND
9			GND	IN039P	IN039N	GND
10			GND	IN040P	IN040N	GND

CNM206

	A	B	BG	C	D	DG
1			GND	IN021P	IN021N	GND
2			GND	IN022P	IN022N	GND
3			GND	IN023P	IN023N	GND
4			GND	IN024P	IN024N	GND
5			GND	IN025P	IN025N	GND
6			GND	IN026P	IN026N	GND
7			GND	IN027P	IN027N	GND
8			GND	IN028P	IN028N	GND
9			GND	IN029P	IN029N	GND
10			GND	IN030P	IN030N	GND

SLOT 6
ME1/IN21-40

MB-1151 (6/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_6

4-176

A SIDE XPT-31

B SIDE CNI-37

CNB207

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	(SLOT_No1)	GND	(SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_6F	BD_EXT_6R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	(RESET)	(DC_ENBL)	GND	(X/XSF)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF207

	A	B	BG	C	D	DG
1			GND	IN051P	IN051N	GND
2			GND	IN052P	IN052N	GND
3			GND	IN053P	IN053N	GND
4			GND	IN054P	IN054N	GND
5			GND	IN055P	IN055N	GND
6			GND	IN056P	IN056N	GND
7			GND	IN057P	IN057N	GND
8			GND	IN058P	IN058N	GND
9			GND	IN059P	IN059N	GND
10			GND	IN060P	IN060N	GND

CNM207

	A	B	BG	C	D	DG
1			GND	IN041P	IN041N	GND
2			GND	IN042P	IN042N	GND
3			GND	IN043P	IN043N	GND
4			GND	IN044P	IN044N	GND
5			GND	IN045P	IN045N	GND
6			GND	IN046P	IN046N	GND
7			GND	IN047P	IN047N	GND
8			GND	IN048P	IN048N	GND
9			GND	IN049P	IN049N	GND
10			GND	IN050P	IN050N	GND

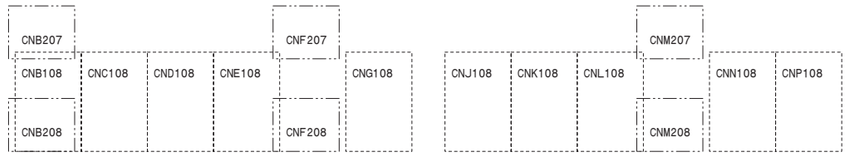

SLOT 7
---/IN41-60

MB-1151 (7/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_7

MB-1151 (8/16)

A SIDE XPT-31

CNB108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V	12V
4												
5	RESET0	DC_ENBL0	GND	(X-XSF)	FUSE+12V	GND			GND			GND
6	BD_EXT_7F	BD_EXT_7R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND	INET0_TRX0P	INET0_TRX0N	GND	INET0_TRX1P	INET0_TRX1N	GND
7	GND (SLOT_No.0)	GND (SLOT_No.1)	GND	GND (SLOT_No.2)	(SLOT_No.3)	GND	INET0_TRX2P	INET0_TRX2N	GND	INET0_TRX3P	INET0_TRX3N	GND
8	GND (SLOT_No.4)	GND (SLOT_No.5)	GND	GND (SLOT_No.6)	GND (SLOT_No.7)	GND			GND			GND
9	VCLK2P	VCLK2N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND			GND			GND
10	FD4P	FD4N	GND	VD2P	VD2N	GND			GND			GND

CNC108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND	XPT_CLK0p	XPT_CLK0n	GND	XPT_CS0An	XPT_CS0Bn	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND	XPT_CLK1p	XPT_CLK1n	GND	XPT_CS1An	XPT_CS1Bn	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND	XPT_CLK2p	XPT_CLK2n	GND	XPT_CS2An	XPT_CS2Bn	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND	XPT_CLK3p	XPT_CLK3n	GND	XPT_CS3An	XPT_CS3Bn	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND	XPT_CLK4p	XPT_CLK4n	GND	XPT_CS4An	XPT_CS4Bn	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND	(XPT_CLK5p)	(XPT_CLK5n)	GND	(XPT_CS5An)	(XPT_CS5Bn)	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND	XPT_MEOn	XPT_ME1n	GND	XPT_WAITOn	XPT_WAIT1n	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND	(XPT_ME2n)	XPT_ME3n	GND	(XPT_WAIT2n)	XPT_WAIT3n	GND
9	(XPT_CLKP)	(XPT_CLKN)	GND	(XPT_CSA)	(XPT_CSB)	GND	XPT_ME4n	XPT_ME5n	GND	XPT_WAIT4n	(XPT_WAIT5n)	GND
10	(XPT_ME)	(XPT_WAIT)	GND	(XPT_OE)	(XPT_RESET1n)	GND	XPT_OEn	XPT_RESET0n	GND	XPT_RESET1n	XPT_RESET2n	GND

CND108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	CCR_OUT2P	CCR_OUT2N	GND	ME2_OUT8P	ME2_OUT8N	GND	DME_MON6P	DME_MON6N	GND	IN020P	IN020N	GND
2	CCR_OUT1P	CCR_OUT1N	GND	ME2_PROCK2P	ME2_PROCK2N	GND	DME_MON5P	DME_MON5N	GND	IN019P	IN019N	GND
3	INFC_OUT08P	INFC_OUT08N	GND	ME2_OUT7P	ME2_OUT7N	GND	ME2_PROCKP	ME2_PROCKN	GND	IN018P	IN018N	GND
4	INFC_OUT07P	INFC_OUT07N	GND	ME2_OUT6P	ME2_OUT6N	GND	ME2_PROCV2P	ME2_PROCV2N	GND	IN017P	IN017N	GND
5	INFC_OUT06P	INFC_OUT06N	GND	ME2_OUT5P	ME2_OUT5N	GND	ME2_PROCVP	ME2_PROCVN	GND	IN016P	IN016N	GND
6	INFC_OUT05P	INFC_OUT05N	GND	ME1_OUT8P	ME1_OUT8N	GND	ME1_BGCOLP	ME1_BGCOLN	GND	IN015P	IN015N	GND
7	PP_OUT8P	PP_OUT8N	GND	ME1_OUT7P	ME1_OUT7N	GND	ME1_PROCK2P	ME1_PROCK2N	GND	IN014P	IN014N	GND
8	PP_OUT7P	PP_OUT7N	GND	ME1_OUT6P	ME1_OUT6N	GND	ME1_PROCKP	ME1_PROCKN	GND	IN013P	IN013N	GND
9	PP_OUT6P	PP_OUT6N	GND	ME1_OUT5P	ME1_OUT5N	GND	ME1_PROCV2P	ME1_PROCV2N	GND	IN012P	IN012N	GND
10	PP_OUT5P	PP_OUT5N	GND	ME1_BGCOL2P	ME1_BGCOL2N	GND	ME1_PROCVP	ME1_PROCVN	GND	IN011P	IN011N	GND

CNE108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	PP_BGCOL2P	PP_BGCOL2N	GND	IN056P	IN056N	GND	IN076P	IN076N	GND	IN040P	IN040N	GND
2	PP_BGCOLP	PP_BGCOLN	GND	IN057P	IN057N	GND	IN077P	IN077N	GND	IN039P	IN039N	GND
3	PP_PROCK2P	PP_PROCK2N	GND	IN058P	IN058N	GND	IN078P	IN078N	GND	IN038P	IN038N	GND
4	PP_PROCKP	PP_PROCKN	GND	IN059P	IN059N	GND	IN079P	IN079N	GND	IN037P	IN037N	GND
5	PP_PROCV2P	PP_PROCV2N	GND	IN060P	IN060N	GND	IN080P	IN080N	GND	IN036P	IN036N	GND
6	PP_PROCVP	PP_PROCVN	GND	IN071P	IN071N	GND	IN051P	IN051N	GND	IN035P	IN035N	GND
7	PP_EXT_OUT4P	PP_EXT_OUT4N	GND	IN072P	IN072N	GND	IN052P	IN052N	GND	IN034P	IN034N	GND
8	PP_EXT_OUT3P	PP_EXT_OUT3N	GND	IN073P	IN073N	GND	IN053P	IN053N	GND	IN033P	IN033N	GND
9	PP_EXT_OUT2P	PP_EXT_OUT2N	GND	IN074P	IN074N	GND	IN054P	IN054N	GND	IN032P	IN032N	GND
10	PP_EXT_OUT1P	PP_EXT_OUT1N	GND	IN075P	IN075N	GND	IN055P	IN055N	GND	IN031P	IN031N	GND

CNG108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	PP_KEY6_SRCBP	PP_KEY6_SRCBN	GND	CCR_IN2AP	CCR_IN2AN	GND	ME1_KEY6_SRCAP	ME1_KEY6_SRCAN	GND	DME_UTIL2AP	DME_UTIL2AN	GND
2	PP_KEY6_FILBP	PP_KEY6_FILBN	GND	CCR_IN1AP	CCR_IN1AN	GND	ME1_KEY6_FILAP	ME1_KEY6_FILAN	GND	DME_UTIL1AP	DME_UTIL1AN	GND
3	PP_KEY5_SRCBP	PP_KEY5_SRCBN	GND	PP_KEY2_SRCBP	PP_KEY2_SRCBN	GND	ME1_KEY5_SRCAP	ME1_KEY5_SRCAN	GND	ME1_KEY2_SRCAP	ME1_KEY2_SRCAN	GND
4	PP_KEY5_FILBP	PP_KEY5_FILBN	GND	PP_KEY2_FILBP	PP_KEY2_FILBN	GND	ME1_KEY5_FILAP	ME1_KEY5_FILAN	GND	ME1_KEY2_FILAP	ME1_KEY2_FILAN	GND
5	OUT24_INAP	OUT24_INAN	GND	PP_KEY1_SRCBP	PP_KEY1_SRCBN	GND	ME2_KEY6_SRCAP	ME2_KEY6_SRCAN	GND	ME1_KEY1_SRCAP	ME1_KEY1_SRCAN	GND
6	OUT23_INAP	OUT23_INAN	GND	PP_KEY1_FILBP	PP_KEY1_FILBN	GND	ME2_KEY6_FILAP	ME2_KEY6_FILAN	GND	ME1_KEY1_FILAP	ME1_KEY1_FILAN	GND
7	OUT22_INAP	OUT22_INAN	GND	FC_IN08P	FC_IN08N	GND	ME2_KEY5_SRCAP	ME2_KEY5_SRCAN	GND	ME2_KEY2_SRCAP	ME2_KEY2_SRCAN	GND
8	OUT21_INAP	OUT21_INAN	GND	FC_IN07P	FC_IN07N	GND	ME2_KEY5_FILAP	ME2_KEY5_FILAN	GND	ME2_KEY2_FILAP	ME2_KEY2_FILAN	GND
9	OUT48_INAP	OUT48_INAN	GND	FC_IN06P	FC_IN06N	GND	ME2_EXT_DMEBP	ME2_EXT_DMEBN	GND	ME2_KEY1_SRCAP	ME2_KEY1_SRCAN	GND
10	OUT47_INAP	OUT47_INAN	GND	FC_IN05P	FC_IN05N	GND	ME2_EXT_DMEAP	ME2_EXT_DMEAN	GND	ME2_KEY1_FILAP	ME2_KEY1_FILAN	GND

CNJ108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT46_INAP	OUT46_INAN	GND	OUT20_INAP	OUT20_INAN	GND	ME1_EXT_DMEBP	ME1_EXT_DMEBN	GND	ME2_UTIL3BP	ME2_UTIL3BN	GND
2	OUT45_INAP	OUT45_INAN	GND	OUT19_INAP	OUT19_INAN	GND	ME1_EXT_DMEAP	ME1_EXT_DMEAN	GND	ME2_UTIL3AP	ME2_UTIL3AN	GND
3	OUT40_INAP	OUT40_INAN	GND	PP_EXT_DMEBP	PP_EXT_DMEBN	GND	OUT18_INAP	OUT18_INAN	GND	ME1_UTIL2BP	ME1_UTIL2BN	GND
4	OUT39_INAP	OUT39_INAN	GND	PP_EXT_DMEAP	PP_EXT_DMEAN	GND	OUT17_INAP	OUT17_INAN	GND	ME1_UTIL2AP	ME1_UTIL2AN	GND
5	OUT38_INAP	OUT38_INAN	GND	PP_UTIL3BP	PP_UTIL3BN	GND	ME1_UTIL3BP	ME1_UTIL3BN	GND	ME1_UTIL1BP	ME1_UTIL1BN	GND
6	OUT37_INAP	OUT37_INAN	GND	PP_UTIL3AP	PP_UTIL3AN	GND	ME1_UTIL3AP	ME1_UTIL3AN	GND	ME1_UTIL1AP	ME1_UTIL1AN	GND
7	OUT16_INAP	OUT16_INAN	GND	OUT44_INAP	OUT44_INAN	GND	PP_UTIL2BP	PP_UTIL2BN	GND	ME2_UTIL2BP	ME2_UTIL2BN	GND
8	OUT15_INAP	OUT15_INAN	GND	OUT43_INAP	OUT43_INAN	GND	PP_UTIL2AP	PP_UTIL2AN	GND	ME2_UTIL2AP	ME2_UTIL2AN	GND
9	OUT14_INAP	OUT14_INAN	GND	OUT42_INAP	OUT42_INAN	GND	PP_UTIL1BP	PP_UTIL1BN	GND	ME2_UTIL1BP	ME2_UTIL1BN	GND
10	OUT13_INAP	OUT13_INAN	GND	OUT41_INAP	OUT41_INAN	GND	PP_UTIL1AP	PP_UTIL1AN	GND	ME2_UTIL1AP	ME2_UTIL1AN	GND

CNK108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	FMOUT16P	FMOUT16N	GND	INFC_OUT04P	INFC_OUT04N	GND	ME1_EXT_OUT4P	ME1_EXT_OUT4N	GND	IN010P	IN010N	GND
2	FMOUT15P	FMOUT15N	GND	INFC_OUT03P	INFC_OUT03N	GND	ME1_EXT_OUT3P	ME1_EXT_OUT3N	GND	IN009P	IN009N	GND
3	FMOUT14P	FMOUT14N	GND	INFC_OUT02P	INFC_OUT02N	GND	ME2_EXT_OUT4P	ME2_EXT_OUT4N	GND	IN008AP	IN008AN	GND
4	FMOUT13P	FMOUT13N	GND	INFC_OUT01P	INFC_OUT01N	GND	ME2_EXT_OUT3P	ME2_EXT_OUT3N	GND	IN007AP	IN007AN	GND
5	FMOUT12P	FMOUT12N	GND	ME1_EXT_OUT2P	ME1_EXT_OUT2N	GND	ME2_EXT_OUT2P	ME2_EXT_OUT2N	GND	IN006AP	IN006AN	GND
6	FMOUT11P	FMOUT11N	GND	ME1_EXT_OUT1P	ME1_EXT_OUT1N	GND	ME2_EXT_OUT1P	ME2_EXT_OUT1N	GND	IN005AP	IN005AN	GND
7	FMOUT10P	FMOUT10N	GND	ME1_OUT4P	ME1_OUT4N	GND	ME2_OUT4P	ME2_OUT4N	GND	IN004AP	IN004AN	GND
8	FMOUT9P	FMOUT9N	GND	ME1_OUT3P	ME1_OUT3N	GND	ME2_OUT3P	ME2_OUT3N	GND	IN003AP	IN003AN	GND
9	FMOUT8P	FMOUT8N	GND	ME1_OUT2P	ME1_OUT2N	GND	ME2_OUT2P	ME2_OUT2N	GND	IN002AP	IN002AN	GND
10	FMOUT7P	FMOUT7N	GND	ME1_OUT1P	ME1_OUT1N	GND	ME2_OUT1P	ME2_OUT1N	GND	IN001AP	IN001AN	GND

CNL108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	FMOUT6P	FMOUT6N	GND	IN046P	IN046N	GND	IN066P	IN066N	GND	IN030P	IN030N	GND
2	FMOUT5P	FMOUT5N	GND	IN047P	IN047N	GND	IN067P	IN067N	GND	IN029P	IN029N	GND
3	FMOUT4P	FMOUT4N	GND	IN048P	IN048N	GND	IN068P	IN068N	GND	IN028P	IN028N	GND
4	FMOUT3P	FMOUT3N	GND	IN049P	IN049N	GND	IN069P	IN069N	GND	IN027P	IN027N	GND
5	FMOUT2P	FMOUT2N	GND	IN050P	IN050N	GND	IN070P	IN070N	GND	IN026P	IN026N	GND
6	FMOUT1P	FMOUT1N	GND	IN061P	IN061N	GND	IN041P	IN041N	GND	IN025P	IN025N	GND
7	PP_OUT4P	PP_OUT4N	GND	IN062P	IN062N	GND	IN042P	IN042N	GND	IN024P	IN024N	GND
8	PP_OUT3P	PP_OUT3N	GND	IN063P	IN063N	GND	IN043P	IN043N	GND	IN023P	IN023N	GND
9	PP_OUT2P	PP_OUT2N	GND	IN064P	IN064N	GND	IN044P	IN044N	GND	IN022P	IN022N	GND
10	PP_OUT1P	PP_OUT1N	GND	IN065P	IN065N	GND	IN045P	IN045N	GND	IN021P	IN021N	GND

CNM108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	PP_DMEKBP	PP_DMEKBN	GND	PP_BK0DBBP	PP_BK0DBBN	GND	ME1_BK0DBBP	ME1_BK0DBBN	GND	ME1_DMEKBP	ME1_DMEKBN	GND
2	PP_DMEKAP	PP_DMEKAN	GND	PP_BK0DBAP	PP_BK0DBAN	GND	ME1_BK0DBAP	ME1_BK0DBAN	GND	ME1_DMEKAP	ME1_DMEKAN	GND
3	PP_DMEVBP	PP_DMEVBN	GND	PP_BK0DABP	PP_BK0DABN	GND	ME1_BK0DABP	ME1_BK0DABN	GND	ME1_DMEVBP	ME1_DMEVBN	GND
4	PP_DMEVAP	PP_DMEVAN	GND	PP_BK0DAAP	PP_BK0DAAN	GND	ME1_BK0DAAP	ME1_BK0DAAN	GND	ME1_DMEVAP	ME1_DMEVAN	GND
5	OUT36_INAP	OUT36_INAN	GND	OUT12_INAP	OUT12_INAN	GND	ME2_BK0DBBP	ME2_BK0DBBN	GND	ME2_DMEKBP	ME2_DMEKBN	GND
6	OUT35_INAP	OUT35_INAN	GND	OUT11_INAP	OUT11_INAN	GND	ME2_BK0DBAP	ME2_BK0DBAN	GND	ME2_DMEKAP	ME2_DMEKAN	GND
7	OUT34_INAP	OUT34_INAN	GND	OUT10_INAP	OUT10_INAN	GND	ME2_BK0DABP	ME2_BK0DABN	GND	ME2_DMEVBP	ME2_DMEVBN	GND
8	OUT33_INAP	OUT33_INAN	GND	OUT09_INAP	OUT09_INAN	GND	ME2_BK0DAAP	ME2_BK0DAAN	GND	ME2_DMEVAP	ME2_DMEVAN	GND
9	OUT32_INAP	OUT32_INAN	GND	OUT08_INAP	OUT08_INAN	GND	PP_KEY4_SRCBP	PP_KEY4_SRCBN	GND	ME2_KEY8_SRCAP	ME2_KEY8_SRCAN	GND
10	OUT31_INAP	OUT31_INAN	GND	OUT07_INAP	OUT07_INAN	GND	PP_KEY4_FILBP	PP_KEY4_FILBN	GND	ME2_KEY8_FILAP	ME2_KEY8_FILAN	GND

CNP108

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	OUT30_INAP	OUT30_INAN	GND	OUT06_INAP	OUT06_INAN	GND	PP_KEY3_SRCBP	PP_KEY3_SRCBN	GND	ME2_KEY7_SRCAP	ME2_KEY7_SRCAN	GND
2	OUT29_INAP	OUT29_INAN	GND	OUT05_INAP	OUT05_INAN	GND	PP_KEY3_FILBP	PP_KEY3_FILBN	GND	ME2_KEY7_FILAP	ME2_KEY7_FILAN	GND
3	OUT28_INAP	OUT28_INAN	GND	FC_IN04P	FC_IN04N	GND	OUT04_INAP	OUT04_INAN	GND	ME1_KEY4_SRCAP	ME1_KEY4_SRCAN	GND
4	FM_IN2BP	FM_IN2BN	GND	FC_IN03P	FC_IN03N	GND	OUT03_INAP	OUT03_INAN	GND	ME1_KEY4_FILAP	ME1_KEY4_FILAN	GND
5	OUT27_INAP	OUT27_INAN	GND	FC_IN02P	FC_IN02N	GND	OUT02_INAP	OUT02_INAN	GND	ME1_KEY3_SRCAP	ME1_KEY3_SRCAN	GND
6	FM_IN2AP	FM_IN2AN	GND	FC_IN01P	FC_IN01N	GND	OUT01_INAP	OUT01_INAN	GND	ME1_KEY3_FILAP	ME1_KEY3_FILAN	GND
7	OUT26_INAP	OUT26_INAN	GND	PP_KEY8_SRCBP	PP_KEY8_SRCBN	GND	ME1_KEY8_SRCAP	ME1_KEY8_SRCAN	GND	ME2_KEY4_SRCAP	ME2_KEY4_SRCAN	GND
8	OUT25_INAP	OUT25_INAN	GND	PP_KEY8_FILBP	PP_KEY8_FILBN	GND	ME1_KEY8_FILAP	ME1_KEY8_FILAN	GND	ME2_KEY4_FILAP	ME2_KEY4_FILAN	GND
9	FM_IN1BP	FM_IN1BN	GND	PP_KEY7_SRCBP	PP_KEY7_SRCBN	GND	ME1_KEY7_SRCAP	ME1_KEY7_SRCAN	GND	ME2_KEY3_SRCAP	ME2_KEY3_SRCAN	GND
10	FM_IN1AP	FM_IN1AN	GND	PP_KEY7_FILBP	PP_KEY7_FILBN	GND	ME1_KEY7_FILAP	ME1_KEY7_FILAN	GND	ME2_KEY3_FILAP	ME2_KEY3_FILAN	GND

B SIDE CNI-37

CNB208

	A	B	BG	C	D	DG
1	FD4P	FD4N	GND	VD2P	VD2N	GND
2	VCLK2P	VCLK2N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
3	GND (SLOT_No.4)	GND (SLOT_No.5)	GND	GND (SLOT_No.6)	GND (SLOT_No.7)	GND
4	GND (SLOT_No.0)	GND (SLOT_No.1)	GND	GND (SLOT_No.2)	(SLOT_No.3)	GND
5	BD_EXT_7F	BD_EXT_7R	GND	CNI_I2C_SCL	CNI_I2C_SDA	GND
6	RESET0	DC_ENBL0	GND	(X-XSF)	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF208

	A	B	BG	C	D	DG
1			GND	IN071P	IN071N	GND
2			GND	IN072P	IN072N	GND
3			GND	IN073P	IN073N	GND
4			GND	IN074P	IN074N	GND
5			GND	IN075P	IN075N	GND
6			GND	IN076P	IN076N	GND
7			GND	IN077P	IN077N	GND
8			GND	IN078P	IN078N	GND
9			GND	IN079P	IN079N	GND
10			GND	IN080P	IN080N	GND

CNM208

	A	B	BG	C	D	DG
1			GND	IN061P	IN061N	GND
2			GND	IN062P	IN062N	GND
3			GND	IN063P	IN063N	GND
4			GND	IN064P	IN064N	GND
5			GND	IN065P	IN065N	GND
6			GND	IN066P	IN066N	GND
7			GND	IN067P	IN067N	GND
8			GND	IN068P	IN068N	GND
9			GND	IN069P	IN069N	GND
10			GND	IN070P	IN070N	GND

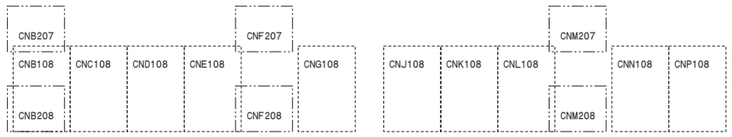

SLOT08
XPT MAIN/IN61-80

MB-1151 (8/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_8

4-178

MB-1151 (9/16)

A SIDE MIX-53

CNB109

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET1	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
6	BD_EXT_8F	BD_EXT_8R	GND	SD/HD0	SD/HD0	GND
7	(SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9			GND			GND
10			GND			GND

CNC109

	A	B	BG	C	D	DG
1	VCLK9P	VCLK9N	GND			GND
2	FD3P	FD3N	GND	VD7P	VD7N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET5_TRX0P	INET5_TRX0N	GND	INET5_TRX1P	INET5_TRX1N	GND
7	INET5_TRX2P	INET5_TRX2N	GND	INET5_TRX3P	INET5_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE109

	A	B	BG	C	D	DG
1	PP_KEY6_SRCBP	PP_KEY6_SRCBN	GND	PP_KEY2_SRCBP	PP_KEY2_SRCBN	GND
2	(KEY6_SRCAP)	(KEY6_SRCAN)	GND	(KEY2_SRCAP)	(KEY2_SRCAN)	GND
3	PP_KEY6_FILBP	PP_KEY6_FILBN	GND	PP_KEY2_FILBP	PP_KEY2_FILBN	GND
4	PP_OUT8P	PP_OUT8N	GND	(KEY2_FILAP)	(KEY2_FILAN)	GND
5	PP_OUT7P	PP_OUT7N	GND	(KEY6_FILAP)	(KEY6_FILAN)	GND
6	PP_OUT6P	PP_OUT6N	GND	PP_KEY5_SRCBP	PP_KEY5_SRCBN	GND
7	PP_OUT5P	PP_OUT5N	GND	PP_KEY1_SRCBP	PP_KEY1_SRCBN	GND
8	(KEY5_SRCAP)	(KEY5_SRCAN)	GND	(KEY1_SRCAP)	(KEY1_SRCAN)	GND
9	PP_KEY5_FILBP	PP_KEY5_FILBN	GND	PP_KEY1_FILBP	PP_KEY1_FILBN	GND
10	(KEY5_FILAP)	(KEY5_FILAN)	GND	(KEY1_FILAP)	(KEY1_FILAN)	GND

CNG109

	A	B	BG	C	D	DG
1			GND	PP_EXT_DMEBP	PP_EXT_DMEBN	GND
2	PP_BGCOL2P	PP_BGCOL2N	GND	PP_EXT_DMEAP	PP_EXT_DMEAN	GND
3	PP_BGCOLP	PP_BGCOLN	GND			GND
4			GND	PP_UTIL3BP	PP_UTIL3BN	GND
5			GND	PP_UTIL3AP	PP_UTIL3AN	GND
6			GND	PP_UTIL2BP	PP_UTIL2BN	GND
7	PP_PROCK2P	PP_PROCK2N	GND	PP_UTIL2AP	PP_UTIL2AN	GND
8	PP_PROCKP	PP_PROCKN	GND			GND
9	PP_PROCV2P	PP_PROCV2N	GND	PP_UTIL1BP	PP_UTIL1BN	GND
10	PP_PROCVP	PP_PROCVN	GND	PP_UTIL1AP	PP_UTIL1AN	GND

CNJ109

	A	B	BG	C	D	DG
1	PP_SEND4KP	PP_SEND4KN	GND	PP_MVE4KP	PP_MVE4KN	GND
2	PP_SEND2KP	PP_SEND2KN	GND	PP_MVE2KP	PP_MVE2KN	GND
3			GND			GND
4	PP_SEND4VP	PP_SEND4VN	GND	PP_MVE4VP	PP_MVE4VN	GND
5	PP_SEND2VP	PP_SEND2VN	GND	PP_MVE2VP	PP_MVE2VN	GND
6	PP_SEND3KP	PP_SEND3KN	GND	PP_MVE3KP	PP_MVE3KN	GND
7	PP_SEND1KP	PP_SEND1KN	GND	PP_MVE1KP	PP_MVE1KN	GND
8			GND			GND
9	PP_SEND3VP	PP_SEND3VN	GND	PP_MVE3VP	PP_MVE3VN	GND
10	PP_SEND1VP	PP_SEND1VN	GND	PP_MVE1VP	PP_MVE1VN	GND

CNL109

	A	B	BG	C	D	DG
1	PP_EXT_OUT4P	PP_EXT_OUT4N	GND	PP_DMEKBP	PP_DMEKBN	GND
2			GND	PP_DMEKAP	PP_DMEKAN	GND
3	PP_EXT_OUT3P	PP_EXT_OUT3N	GND			GND
4			GND	PP_DMEVBP	PP_DMEVBN	GND
5			GND	PP_DMEVAP	PP_DMEVAN	GND
6			GND	PP_BKGDBBP	PP_BKGDBBN	GND
7			GND	PP_BKGDBAP	PP_BKGDBAN	GND
8	PP_EXT_OUT2P	PP_EXT_OUT2N	GND			GND
9			GND	PP_BKGDABP	PP_BKGDABN	GND
10	PP_EXT_OUT1P	PP_EXT_OUT1N	GND	PP_BKGDAAP	PP_BKGDAAN	GND

CNN109

	A	B	BG	C	D	DG
1	PP_KEY8_SRCBP	PP_KEY8_SRCBN	GND	PP_KEY4_SRCBP	PP_KEY4_SRCBN	GND
2	(KEY8_SRCAP)	(KEY8_SRCAN)	GND	(KEY4_SRCAP)	(KEY4_SRCAN)	GND
3	PP_KEY8_FILBP	PP_KEY8_FILBN	GND	PP_KEY4_FILBP	PP_KEY4_FILBN	GND
4	PP_OUT4P	PP_OUT4N	GND	(KEY4_FILAP)	(KEY4_FILAN)	GND
5	PP_OUT3P	PP_OUT3N	GND	(KEY8_FILAP)	(KEY8_FILAN)	GND
6	PP_OUT2P	PP_OUT2N	GND	PP_KEY7_SRCBP	PP_KEY7_SRCBN	GND
7	PP_OUT1P	PP_OUT1N	GND	PP_KEY3_SRCBP	PP_KEY3_SRCBN	GND
8	(KEY7_SRCAP)	(KEY7_SRCAN)	GND	(KEY3_SRCAP)	(KEY3_SRCAN)	GND
9	PP_KEY7_FILBP	PP_KEY7_FILBN	GND	PP_KEY3_FILBP	PP_KEY3_FILBN	GND
10	(KEY7_FILAP)	(KEY7_FILAN)	GND	(KEY3_FILAP)	(KEY3_FILAN)	GND

B SIDE CNO-38

CNB209

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_8F	BD_EXT_8R	GND	SD/HD0	SD/HD0	GND
6	RESET1	DC_ENBL1	GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF209

	A	B	BG	C	D	DG
1			GND	OUT11AP	OUT11AN	GND
2			GND	OUT12AP	OUT12AN	GND
3			GND	OUT13AP	OUT13AN	GND
4			GND	OUT14AP	OUT14AN	GND
5			GND	OUT15AP	OUT15AN	GND
6			GND	OUT16AP	OUT16AN	GND
7			GND	OUT17AP	OUT17AN	GND
8			GND	OUT18AP	OUT18AN	GND
9			GND	OUT19AP	OUT19AN	GND
10			GND	OUT20AP	OUT20AN	GND

CNM209

	A	B	BG	C	D	DG
1			GND	OUT01AP	OUT01AN	GND
2			GND	OUT02AP	OUT02AN	GND
3			GND	OUT03AP	OUT03AN	GND
4			GND	OUT04AP	OUT04AN	GND
5			GND	OUT05AP	OUT05AN	GND
6			GND	OUT06AP	OUT06AN	GND
7			GND	OUT07AP	OUT07AN	GND
8			GND	OUT08AP	OUT08AN	GND
9			GND	OUT09AP	OUT09AN	GND
10			GND	OUT10AP	OUT10AN	GND

SLOT 9
PP/OUT1-20

MB-1151 (9/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_9

MB-1151 (10/16)

A SIDE FC-112

CNB110

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	SD/HD0	FUSE+12V	GND
6	BD_EXT_9F	BD_EXT_9R	GND	SD/HD0	SD/HD0	GND
7	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK4P	VCLK4N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
10	FD2P	FD2N	GND	VD3P	VD3N	GND

CNC110

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK3p	XPT_CLK3n	GND	XPT_CS3An	XPT_CS3Bn	GND
10	XPT_WE3n	XPT_WAIT3n	GND	XPT_OEn	XPT_RESET1n	GND

CNE110

	A	B	BG	C	D	DG
1			GND			GND
2			GND	IFC_INA08P	IFC_INA08N	GND
3	INFC_OUT08P	INFC_OUT08N	GND	FC_IN08P	FC_IN08N	GND
4			GND	IFC_INA07P	IFC_INA07N	GND
5	INFC_OUT07P	INFC_OUT07N	GND	FC_IN07P	FC_IN07N	GND
6			GND	IFC_INA06P	IFC_INA06N	GND
7	INFC_OUT06P	INFC_OUT06N	GND	FC_IN06P	FC_IN06N	GND
8			GND	IFC_INA05P	IFC_INA05N	GND
9	INFC_OUT05P	INFC_OUT05N	GND	FC_IN05P	FC_IN05N	GND
10			GND			GND

CNL110

	A	B	BG	C	D	DG
1			GND			GND
2			GND	IFC_INA04P	IFC_INA04N	GND
3	INFC_OUT04P	INFC_OUT04N	GND	FC_IN04P	FC_IN04N	GND
4			GND	IFC_INA03P	IFC_INA03N	GND
5	INFC_OUT03P	INFC_OUT03N	GND	FC_IN03P	FC_IN03N	GND
6			GND	IFC_INA02P	IFC_INA02N	GND
7	INFC_OUT02P	INFC_OUT02N	GND	FC_IN02P	FC_IN02N	GND
8			GND	IFC_INA01P	IFC_INA01N	GND
9	INFC_OUT01P	INFC_OUT01N	GND	FC_IN01P	FC_IN01N	GND
10			GND			GND

B SIDE CNO-38

CNB210

	A	B	BG	C	D	DG
1	FD2P	FD2N	GND	VD3P	VD3N	GND
2	VCLK4P	VCLK4N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	(SLOT_No1)	GND	GND (SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_9F	BD_EXT_9R	GND	SD/HD0	SD/HD0	GND
6	RESET0	DC_ENBL0	GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF210

	A	B	BG	C	D	DG
1			GND	OUT35AP	OUT35AN	GND
2			GND	OUT36AP	OUT36AN	GND
3			GND	OUT37AP	OUT37AN	GND
4			GND	OUT38AP	OUT38AN	GND
5			GND	OUT39AP	OUT39AN	GND
6			GND	OUT40AP	OUT40AN	GND
7			GND	OUT41AP	OUT41AN	GND
8			GND	OUT42AP	OUT42AN	GND
9			GND	OUT43AP	OUT43AN	GND
10			GND	OUT44AP	OUT44AN	GND

CNM210

	A	B	BG	C	D	DG
1			GND	OUT25AP	OUT25AN	GND
2			GND	OUT26AP	OUT26AN	GND
3			GND	OUT27AP	OUT27AN	GND
4			GND	OUT28AP	OUT28AN	GND
5			GND	OUT29AP	OUT29AN	GND
6			GND	OUT30AP	OUT30AN	GND
7			GND	OUT31AP	OUT31AN	GND
8			GND	OUT32AP	OUT32AN	GND
9			GND	OUT33AP	OUT33AN	GND
10			GND	OUT34AP	OUT34AN	GND

SLOT10
FC1-8/OUT25-44

MB-1151 (10/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_10

4-180

A SIDE OUT-35

CNB111

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	SD-/HD0	FUSE+12V	GND
6	BD_EXT_10F	BD_EXT_10R	GND	SD-/HD1	SD-/HD2	GND
7	(SLOT_No.0)	(SLOT_No.1)	GND	GND (SLOT_No.2)	(SLOT_No.3)	GND
8	GND (SLOT_No.4)	GND (SLOT_No.5)	GND	GND (SLOT_No.6)	GND (SLOT_No.7)	GND
9	VCLK6P	VCLK6N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
10	FD1P	FD1N	GND	VD6P	VD6N	GND

CNC111

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK1n	XPT_CLK1n	GND	XPT_CS14n	XPT_CS15n	GND
10	XPT_WE1n	XPT_WA1T1n	GND	XPT_OEn	XPT_RESET0n	GND

CND111

	A	B	BG	C	D	DG
1			GND	ICCR_IN4BP	ICCR_IN4BN	GND
2	ICCR_OUT4P	ICCR_OUT4N	GND	ICCR_IN4AP	ICCR_IN4AN	GND
3			GND	ICCR_IN3BP	ICCR_IN3BN	GND
4	ICCR_OUT3P	ICCR_OUT3N	GND	ICCR_IN3AP	ICCR_IN3AN	GND
5			GND	ICCR_IN2BP	ICCR_IN2BN	GND
6	CCR_OUT2P	CCR_OUT2N	GND	CCR_IN2AP	CCR_IN2AN	GND
7			GND	ICCR_IN1BP	ICCR_IN1BN	GND
8	CCR_OUT1P	CCR_OUT1N	GND	CCR_IN1AP	CCR_IN1AN	GND
9			GND			GND
10			GND			GND

CNE111

	A	B	BG	C	D	DG
1	OUT24BP	OUT24BN	GND	IOUT24_INBP	IOUT24_INBN	GND
2	OUT24AP	OUT24AN	GND	OUT24_INAP	OUT24_INAN	GND
3			GND			GND
4	OUT23BP	OUT23BN	GND	IOUT23_INBP	IOUT23_INBN	GND
5	OUT23AP	OUT23AN	GND	OUT23_INAP	OUT23_INAN	GND
6			GND	IOUT22_INBP	IOUT22_INBN	GND
7	OUT22AP	OUT22AN	GND	OUT22_INAP	OUT22_INAN	GND
8			GND			GND
9			GND	IOUT21_INBP	IOUT21_INBN	GND
10	OUT21AP	OUT21AN	GND	OUT21_INAP	OUT21_INAN	GND

CNG111

	A	B	BG	C	D	DG
1			GND	IOUT20_INBP	IOUT20_INBN	GND
2	OUT20AP	OUT20AN	GND	OUT20_INAP	OUT20_INAN	GND
3			GND	IOUT19_INBP	IOUT19_INBN	GND
4	OUT19AP	OUT19AN	GND	OUT19_INAP	OUT19_INAN	GND
5			GND	IOUT18_INBP	IOUT18_INBN	GND
6	OUT18AP	OUT18AN	GND	OUT18_INAP	OUT18_INAN	GND
7			GND	IOUT17_INBP	IOUT17_INBN	GND
8	OUT17AP	OUT17AN	GND	OUT17_INAP	OUT17_INAN	GND
9	MSD_OUT1BP	MSD_OUT1BN	GND			GND
10	MSD_OUT1AP	MSD_OUT1AN	GND			GND

CNK111

	A	B	BG	C	D	DG
1			GND	IOUT16_INBP	IOUT16_INBN	GND
2	OUT16AP	OUT16AN	GND	OUT16_INAP	OUT16_INAN	GND
3			GND			GND
4			GND	IOUT15_INBP	IOUT15_INBN	GND
5	OUT15AP	OUT15AN	GND	OUT15_INAP	OUT15_INAN	GND
6			GND	IOUT14_INBP	IOUT14_INBN	GND
7	OUT14AP	OUT14AN	GND	OUT14_INAP	OUT14_INAN	GND
8			GND			GND
9			GND	IOUT13_INBP	IOUT13_INBN	GND
10	OUT13AP	OUT13AN	GND	OUT13_INAP	OUT13_INAN	GND

CNL111

	A	B	BG	C	D	DG
1			GND	IOUT12_INBP	IOUT12_INBN	GND
2	OUT12AP	OUT12AN	GND	OUT12_INAP	OUT12_INAN	GND
3			GND			GND
4			GND	IOUT11_INBP	IOUT11_INBN	GND
5	OUT11AP	OUT11AN	GND	OUT11_INAP	OUT11_INAN	GND
6			GND	IOUT10_INBP	IOUT10_INBN	GND
7	OUT10AP	OUT10AN	GND	OUT10_INAP	OUT10_INAN	GND
8			GND			GND
9			GND	IOUT09_INBP	IOUT09_INBN	GND
10	OUT09AP	OUT09AN	GND	OUT09_INAP	OUT09_INAN	GND

CNN111

	A	B	BG	C	D	DG
1			GND	IOUT08_INBP	IOUT08_INBN	GND
2	OUT08AP	OUT08AN	GND	OUT08_INAP	OUT08_INAN	GND
3			GND			GND
4			GND	IOUT07_INBP	IOUT07_INBN	GND
5	OUT07AP	OUT07AN	GND	OUT07_INAP	OUT07_INAN	GND
6			GND	IOUT06_INBP	IOUT06_INBN	GND
7	OUT06AP	OUT06AN	GND	OUT06_INAP	OUT06_INAN	GND
8			GND			GND
9			GND	IOUT05_INBP	IOUT05_INBN	GND
10	OUT05AP	OUT05AN	GND	OUT05_INAP	OUT05_INAN	GND

CNP111

	A	B	BG	C	D	DG
1			GND	IOUT04_INBP	IOUT04_INBN	GND
2	OUT04AP	OUT04AN	GND	OUT04_INAP	OUT04_INAN	GND
3			GND	IOUT03_INBP	IOUT03_INBN	GND
4	OUT03AP	OUT03AN	GND	OUT03_INAP	OUT03_INAN	GND
5			GND	IOUT02_INBP	IOUT02_INBN	GND
6	OUT02AP	OUT02AN	GND	OUT02_INAP	OUT02_INAN	GND
7			GND	IOUT01_INBP	IOUT01_INBN	GND
8	OUT01AP	OUT01AN	GND	OUT01_INAP	OUT01_INAN	GND
9	FC_OUT2P	FC_OUT2N	GND			GND
10	FC_OUT1P	FC_OUT1N	GND			GND

B SIDE CNO-38

CNB211

	A	B	BG	C	D	DG
1	FD1P	FD1N	GND	VD6P	VD6N	GND
2	VCLK6P	VCLK6N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
3	GND (SLOT_No.4)	GND (SLOT_No.5)	GND	GND (SLOT_No.6)	GND (SLOT_No.7)	GND
4	(SLOT_No.0)	(SLOT_No.1)	GND	GND (SLOT_No.2)	(SLOT_No.3)	GND
5	BD_EXT_10F	BD_EXT_10R	GND	SD-/HD1	SD-/HD2	GND
6	RESET0	DC_ENBL0	GND	SD-/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF211

	A	B	BG	C	D	DG
1			GND	OUT23AP	OUT23AN	GND
2			GND	OUT23BP	OUT23BN	GND
3			GND	OUT24AP	OUT24AN	GND
4			GND	OUT24BP	OUT24BN	GND
5			GND	OUT45AP	OUT45AN	GND
6			GND	OUT46AP	OUT46AN	GND
7			GND	OUT47AP	OUT47AN	GND
8			GND	OUT47BP	OUT47BN	GND
9			GND	OUT48AP	OUT48AN	GND
10			GND	OUT48BP	OUT48BN	GND

CNM211

	A	B	BG	C	D	DG
1			GND	FC_OUT1P	FC_OUT1N	GND
2			GND	FC_OUT2P	FC_OUT2N	GND
3			GND	FC_OUT3P	FC_OUT3N	GND
4			GND	FC_OUT4P	FC_OUT4N	GND
5			GND	MSD_OUT1AP	MSD_OUT1AN	GND
6			GND	MSD_OUT1BP	MSD_OUT1BN	GND
7			GND	MSD_OUT2AP	MSD_OUT2AN	GND
8			GND	MSD_OUT2BP	MSD_OUT2BN	GND
9			GND	OUT21AP	OUT21AN	GND
10			GND	OUT22AP	OUT22AN	GND

OUT1-24/FC, MSD, OUT21-24, 45-48 SLOT11

MB-1151 (11/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_11

A SIDE OUT-35A

CNB112

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET0	DC_ENBL0	GND	SD/HD0	FUSE+12V	GND
6	BD_EXT_11F	BD_EXT_11R	GND			GND
7	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	VCLK8P	VCLK8N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
10	FD0P	FD0N	GND	VD5P	VD5N	GND

CNC112

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK0p	XPT_CLK0n	GND	XPT_CS0An	XPT_CS0Bn	GND
10	XPT_WE0n	XPT_WAIT0n	GND	XPT_OEn	XPT_RESET0n	GND

CNE112

	A	B	BG	C	D	DG
1	OUT48BP	OUT48BN	GND	IOUT48_-INBP)	IOUT48_-INBN)	GND
2	OUT48AP	OUT48AN	GND	OUT48_-INAP	OUT48_-INAN	GND
3			GND			GND
4	OUT47BP	OUT47BN	GND	IOUT47_-INBP)	IOUT47_-INBN)	GND
5	OUT47AP	OUT47AN	GND	OUT47_-INAP	OUT47_-INAN	GND
6			GND	IOUT46_-INBP)	IOUT46_-INBN)	GND
7	OUT46AP	OUT46AN	GND	OUT46_-INAP	OUT46_-INAN	GND
8			GND			GND
9			GND	IOUT45_-INBP)	IOUT45_-INBN)	GND
10	OUT45AP	OUT45AN	GND	OUT45_-INAP	OUT45_-INAN	GND

CNG112

	A	B	BG	C	D	DG
1			GND	IOUT44_-INBP)	IOUT44_-INBN)	GND
2	OUT44AP	OUT44AN	GND	OUT44_-INAP	OUT44_-INAN	GND
3			GND	IOUT43_-INBP)	IOUT43_-INBN)	GND
4	OUT43AP	OUT43AN	GND	OUT43_-INAP	OUT43_-INAN	GND
5			GND	IOUT42_-INBP)	IOUT42_-INBN)	GND
6	OUT42AP	OUT42AN	GND	OUT42_-INAP	OUT42_-INAN	GND
7			GND	IOUT41_-INBP)	IOUT41_-INBN)	GND
8	OUT41AP	OUT41AN	GND	OUT41_-INAP	OUT41_-INAN	GND
9	MSD_OUT2BP	MSD_OUT2BN	GND			GND
10	MSD_OUT2AP	MSD_OUT2AN	GND			GND

CNK112

	A	B	BG	C	D	DG
1			GND	IOUT40_-INBP)	IOUT40_-INBN)	GND
2	OUT40AP	OUT40AN	GND	OUT40_-INAP	OUT40_-INAN	GND
3			GND			GND
4			GND	IOUT39_-INBP)	IOUT39_-INBN)	GND
5	OUT39AP	OUT39AN	GND	OUT39_-INAP	OUT39_-INAN	GND
6			GND	IOUT38_-INBP)	IOUT38_-INBN)	GND
7	OUT38AP	OUT38AN	GND	OUT38_-INAP	OUT38_-INAN	GND
8			GND			GND
9			GND	IOUT37_-INBP)	IOUT37_-INBN)	GND
10	OUT37AP	OUT37AN	GND	OUT37_-INAP	OUT37_-INAN	GND

CNL112

	A	B	BG	C	D	DG
1			GND	IOUT36_-INBP)	IOUT36_-INBN)	GND
2	OUT36AP	OUT36AN	GND	OUT36_-INAP	OUT36_-INAN	GND
3			GND			GND
4			GND	IOUT35_-INBP)	IOUT35_-INBN)	GND
5	OUT35AP	OUT35AN	GND	OUT35_-INAP	OUT35_-INAN	GND
6			GND	IOUT34_-INBP)	IOUT34_-INBN)	GND
7	OUT34AP	OUT34AN	GND	OUT34_-INAP	OUT34_-INAN	GND
8			GND			GND
9			GND	IOUT33_-INBP)	IOUT33_-INBN)	GND
10	OUT33AP	OUT33AN	GND	OUT33_-INAP	OUT33_-INAN	GND

CNN112

	A	B	BG	C	D	DG
1			GND	IOUT32_-INBP)	IOUT32_-INBN)	GND
2	OUT32AP	OUT32AN	GND	OUT32_-INAP	OUT32_-INAN	GND
3			GND			GND
4			GND	IOUT31_-INBP)	IOUT31_-INBN)	GND
5	OUT31AP	OUT31AN	GND	OUT31_-INAP	OUT31_-INAN	GND
6			GND	IOUT30_-INBP)	IOUT30_-INBN)	GND
7	OUT30AP	OUT30AN	GND	OUT30_-INAP	OUT30_-INAN	GND
8			GND			GND
9			GND	IOUT29_-INBP)	IOUT29_-INBN)	GND
10	OUT29AP	OUT29AN	GND	OUT29_-INAP	OUT29_-INAN	GND

CNP112

	A	B	BG	C	D	DG
1			GND	IOUT28_-INBP)	IOUT28_-INBN)	GND
2	OUT28AP	OUT28AN	GND	OUT28_-INAP	OUT28_-INAN	GND
3			GND	IOUT27_-INBP)	IOUT27_-INBN)	GND
4	OUT27AP	OUT27AN	GND	OUT27_-INAP	OUT27_-INAN	GND
5			GND	IOUT26_-INBP)	IOUT26_-INBN)	GND
6	OUT26AP	OUT26AN	GND	OUT26_-INAP	OUT26_-INAN	GND
7			GND	IOUT25_-INBP)	IOUT25_-INBN)	GND
8	OUT25AP	OUT25AN	GND	OUT25_-INAP	OUT25_-INAN	GND
9	FC_OUT4P	FC_OUT4N	GND			GND
10	FC_OUT3P	FC_OUT3N	GND			GND

B SIDE CN-3235

CNB212

	A	B	BG	C	D	DG
1	FD0P	FD0N	GND	VD5P	VD5N	GND
2	VCLK8P	VCLK8N	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	GND (SLOT_No0)	GND (SLOT_No1)	GND	GND (SLOT_No2)	GND (SLOT_No3)	GND
5	BD_EXT_11F	BD_EXT_11R	GND			GND
6	RESET0	DC_ENBL0	GND	SD/HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNF212

	A	B	BG	C	D	DG
1	FM_GBE_TRX0P	FM_GBE_TRX0N	GND	FM_GBE_TRX1P	FM_GBE_TRX1N	GND
2	MDC	MDIO	GND	STATUS	RESET_MY	GND
3			GND			GND
4	PWR_ENABLE	PWR_CUT_-INFO	GND	FM_MTBP	FM_MTBN	GND
5			GND			GND
6	FM_USBP	FM_USBN	GND			GND
7			GND			GND
8			GND			GND
9			GND			GND
10			GND			GND

SLOT12
OUT25-48/FM IF

MB-1151 (12/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_12

MB-1151 (13/16)

A SIDE MY-118

CNB113

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET1	DC_ENBL1	GND		FUSE+12V	GND
6	BD_EXT_12F	BD_EXT_12R	GND			GND
7	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
8	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10			GND			GND

CNC113

	A	B	BG	C	D	DG
1	VCLK10P	VCLK10N	GND			GND
2	FD11P	FD11N	GND	VD4P	VD4N	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET6_TRX0P	INET6_TRX0N	GND	INET6_TRX1P	INET6_TRX1N	GND
7	INET6_TRX2P	INET6_TRX2N	GND	INET6_TRX3P	INET6_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNG113

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5	FM_USBP	FM_USBN	GND			GND
6			GND			GND
7	PWR_ENABLE	PWR_CUT_INFO	GND	FM_MTBP	FM_MTBN	GND
8			GND			GND
9	MDC	MDIO	GND	STATUS	RESET_MY	GND
10	FM_GBE_TRXOP	FM_GBE_TRXON	GND	FM_GBE_TRX1P	FM_GBE_TRX1N	GND

CNL113

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	FMOUT16P	FMOUT16N	GND			GND
4	FMOUT15P	FMOUT15N	GND			GND
5	FMOUT14P	FMOUT14N	GND			GND
6	FMOUT13P	FMOUT13N	GND			GND
7	FMOUT12P	FMOUT12N	GND			GND
8	FMOUT11P	FMOUT11N	GND			GND
9	FMOUT10P	FMOUT10N	GND	FM_IN2BP	FM_IN2BN	GND
10	FMOUT9P	FMOUT9N	GND	FM_IN2AP	FM_IN2AN	GND

CNP113

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	FMOUT8P	FMOUT8N	GND			GND
4	FMOUT7P	FMOUT7N	GND			GND
5	FMOUT6P	FMOUT6N	GND			GND
6	FMOUT5P	FMOUT5N	GND			GND
7	FMOUT4P	FMOUT4N	GND			GND
8	FMOUT3P	FMOUT3N	GND			GND
9	FMOUT2P	FMOUT2N	GND	FM_IN1BP	FM_IN1BN	GND
10	FMOUT1P	FMOUT1N	GND	FM_IN1AP	FM_IN1AN	GND

B SIDE CN-3234

CNB213

	A	B	BG	C	D	DG
1			GND			GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
3	GND (SLOT_No4)	GND (SLOT_No5)	GND	GND (SLOT_No6)	GND (SLOT_No7)	GND
4	(SLOT_No0)	GND (SLOT_No1)	GND	(SLOT_No2)	(SLOT_No3)	GND
5	BD_EXT_12F	BD_EXT_12R	GND			GND
6	RESET1	DC_ENBL1	GND		FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNM213

	A	B	BG	C	D	DG
1	GPI1_OUT6	GPI1_IN6	GND	GPI2_OUT6	GPI2_IN6	GND
2	GPI1_OUT5	GPI1_IN5	GND	GPI2_OUT5	GPI2_IN5	GND
3	GPI1_OUT4	GPI1_IN4	GND	GPI2_OUT4	GPI2_IN4	GND
4	GPI1_OUT3	GPI1_IN3	GND	GPI2_OUT3	GPI2_IN3	GND
5	GPI1_OUT2	GPI1_IN2	GND	GPI2_OUT2	GPI2_IN2	GND
6	GPI1_OUT1	GPI1_IN1	GND	GPI2_OUT1	GPI2_IN1	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND

CNN213

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5			GND			GND
6			GND			GND
7			GND			GND
8			GND			GND
9	GPI1_OUT8	GPI1_IN8	GND	GPI2_OUT8	GPI2_IN8	GND
10	GPI1_OUT7	GPI1_IN7	GND	GPI2_OUT7	GPI2_IN7	GND

CNB113 CNB213 | CNC113

CNG113

CNL113 | CNM213 CNN213 | CNP113

SLOT13
FM/CA IF

MB-1151 (13/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_13

MB-1151 (14/16)

A SIDE CA-82

CNB114

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	DC_ENBL0	DC_ENBL1	GND	SD-HD0	FUSE+12V	GND
6	BD_EXT_13F	BD_EXT_13R	GND	SD-HD1	SD-HD2	GND
7	GND (SLOT_N+0)	(SLOT_N+1)	GND	(SLOT_N+2)	(SLOT_N+3)	GND
8	GND (SLOT_N+4)	GND (SLOT_N+5)	GND	GND (SLOT_N+6)	GND (SLOT_N+7)	GND
9	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
10	RESET0	RESET1	GND	RESET2	RESET3	GND

CNC114

	A	B	BG	C	D	DG
1	VCLK0P	VCLK0N	GND	VCLK1P	VCLK1N	GND
2	VCLK2P	VCLK2N	GND	VCLK3P	VCLK3N	GND
3	VCLK4P	VCLK4N	GND	VCLK5P	VCLK5N	GND
4	VCLK6P	VCLK6N	GND	VCLK7P	VCLK7N	GND
5	VCLK8P	VCLK8N	GND	VCLK9P	VCLK9N	GND
6	VCLK10P	VCLK10N	GND	VCLK11P	/VCLK11N	GND
7	/VCLK12P	/VCLK12N	GND			GND
8	FD0P	FD0N	GND	VD0P	VD0N	GND
9	FD1P	FD1N	GND	VD1P	VD1N	GND
10	FD2P	FD2N	GND	VD2P	VD2N	GND

CND114

	A	B	BG	C	D	DG
1	FD3P	FD3N	GND	VD3P	VD3N	GND
2	FD4P	FD4N	GND	VD4P	VD4N	GND
3	FD5P	FD5N	GND	VD5P	VD5N	GND
4	FD6P	FD6N	GND	VD6P	VD6N	GND
5	FD7P	FD7N	GND	VD7P	VD7N	GND
6	FD8P	FD8N	GND	VD8P	VD8N	GND
7	FD9P	FD9N	GND	VD9P	VD9N	GND
8	FD10P	FD10N	GND	VD10P	VD10N	GND
9	FD11P	FD11N	GND	VD11P	VD11N	GND
10	/FD12P	/FD12N	GND	/VD12P	/VD12N	GND

CNE114

	A	B	BG	C	D	DG
1		/TC_1N	GND		/REF_1N	GND
2	/REF_RESERVE		GND	/REF_RESERVE		GND
3	/EXTHUB_CTRL0	/EXTHUB_CTRL1	GND	/EXTHUB_CTRL2	/EXTHUB_CTRL3	GND
4	/EXTHUB_CTRL4	/EXTHUB_CTRL5	GND	/EXTHUB_CTRL6	/EXTHUB_CTRL7	GND
5	CA101CLK	CA102CLK	GND	/EXTHUB_RESET	/EXTHUB_RESET	GND
6	CA101DAT	/EXTHUB1_MDO	GND	CA102DAT		GND
7			GND		/SG_SEL	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNF114

	A	B	BG	C	D	DG
1	/GBE0_TRX2P	/GBE0_TRX2N	GND	/GBE0_TRX3P	/GBE0_TRX3N	GND
2	/GBE0_TRX0P	/GBE0_TRX0N	GND	/GBE0_TRX1P	/GBE0_TRX1N	GND
3	/GBE0_LED_LJ	/GBE0_LED_RI	GND	/GBE1_LED_LJ	/GBE1_LED_RI	GND
4	/GBE1_TRX2P	/GBE1_TRX2N	GND	/GBE1_TRX3P	/GBE1_TRX3N	GND
5	/GBE1_TRX0P	/GBE1_TRX0N	GND	/GBE1_TRX1P	/GBE1_TRX1N	GND
6	/GBE2_TRX2P	/GBE2_TRX2N	GND	/GBE2_TRX3P	/GBE2_TRX3N	GND
7	/GBE2_TRX0P	/GBE2_TRX0N	GND	/GBE2_TRX1P	/GBE2_TRX1N	GND
8	/GBE2_LED_LJ	/GBE2_LED_RI	GND	/GBE3_LED_LJ	/GBE3_LED_RI	GND
9	/GBE3_TRX2P	/GBE3_TRX2N	GND	/GBE3_TRX3P	/GBE3_TRX3N	GND
10	/GBE3_TRX0P	/GBE3_TRX0N	GND	/GBE3_TRX1P	/GBE3_TRX1N	GND

CNJ114

	A	B	BG	C	D	DG
1	/EXTBUS_CS4		GND	/EXTBUS_INT	/EXTBUS_BUSY	GND
2	/NET0_TRX0P	/NET0_TRX0N	GND	/NET0_TRX1P	/NET0_TRX1N	GND
3	/NET0_TRX2P	/NET0_TRX2N	GND	/NET0_TRX3P	/NET0_TRX3N	GND
4	/NET1_TRX0P	/NET1_TRX0N	GND	/NET1_TRX1P	/NET1_TRX1N	GND
5	/NET1_TRX2P	/NET1_TRX2N	GND	/NET1_TRX3P	/NET1_TRX3N	GND
6			GND			GND
7	/NET2_TRX0P	/NET2_TRX0N	GND	/NET2_TRX1P	/NET2_TRX1N	GND
8	/NET2_TRX2P	/NET2_TRX2N	GND	/NET2_TRX3P	/NET2_TRX3N	GND
9	/NET3_TRX0P	/NET3_TRX0N	GND	/NET3_TRX1P	/NET3_TRX1N	GND
10	/NET3_TRX2P	/NET3_TRX2N	GND	/NET3_TRX3P	/NET3_TRX3N	GND

CNK114

	A	B	BG	C	D	DG
1			GND			GND
2	/NET4_TRX0P	/NET4_TRX0N	GND	/NET4_TRX1P	/NET4_TRX1N	GND
3	/NET4_TRX2P	/NET4_TRX2N	GND	/NET4_TRX3P	/NET4_TRX3N	GND
4	/NET5_TRX0P	/NET5_TRX0N	GND	/NET5_TRX1P	/NET5_TRX1N	GND
5	/NET5_TRX2P	/NET5_TRX2N	GND	/NET5_TRX3P	/NET5_TRX3N	GND
6			GND			GND
7	/NET6_TRX0P	/NET6_TRX0N	GND	/NET6_TRX1P	/NET6_TRX1N	GND
8	/NET6_TRX2P	/NET6_TRX2N	GND	/NET6_TRX3P	/NET6_TRX3N	GND
9	/NET7_TRX0P	/NET7_TRX0N	GND	/NET7_TRX1P	/NET7_TRX1N	GND
10	/NET7_TRX2P	/NET7_TRX2N	GND	/NET7_TRX3P	/NET7_TRX3N	GND

CNL114

	A	B	BG	C	D	DG
1	BD_EXT_19F	BD_EXT_18F	GND	BD_EXT_19R	BD_EXT_18R	GND
2	BD_EXT_17F	BD_EXT_16F	GND	BD_EXT_17R	BD_EXT_16R	GND
3	BD_EXT_15F	BD_EXT_14F	GND	BD_EXT_15R	BD_EXT_14R	GND
4	BD_EXT_13F	BD_EXT_12F	GND	BD_EXT_13R	BD_EXT_12R	GND
5	BD_EXT_11F	BD_EXT_10F	GND	BD_EXT_11R	BD_EXT_10R	GND
6	BD_EXT_9F	BD_EXT_8F	GND	BD_EXT_9R	BD_EXT_8R	GND
7	BD_EXT_7F	BD_EXT_6F	GND	BD_EXT_7R	BD_EXT_6R	GND
8	BD_EXT_5F	BD_EXT_4F	GND	BD_EXT_5R	BD_EXT_4R	GND
9	BD_EXT_3F	BD_EXT_2F	GND	BD_EXT_3R	BD_EXT_2R	GND
10	BD_EXT_1F	BD_EXT_0F	GND	BD_EXT_1R	BD_EXT_0R	GND

CNM114

	A	B	BG	C	D	DG
1	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND
2	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
3	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
4	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
5	GP12_OUT1	GP12_IN1	GND	GP11_OUT1	GP11_IN1	GND
6	GP12_OUT2	GP12_IN2	GND	GP11_OUT2	GP11_IN2	GND
7	GP12_OUT3	GP12_IN3	GND	GP11_OUT3	GP11_IN3	GND
8	GP12_OUT4	GP12_IN4	GND	GP11_OUT4	GP11_IN4	GND
9	GP12_OUT5	GP12_IN5	GND	GP11_OUT5	GP11_IN5	GND
10	GP12_OUT6	GP12_IN6	GND	GP11_OUT6	GP11_IN6	GND

CNN114

	A	B	BG	C	D	DG
1	GP12_OUT7	GP12_IN7	GND	GP11_OUT7	GP11_IN7	GND
2	GP12_OUT8	GP12_IN8	GND	GP11_OUT8	GP11_IN8	GND
3	/POW_SEQ0	GND /POW_SEQ1	GND			GND
4	FAN1_PULSE1	FAN2_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
5	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
6	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
7	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
8	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
9	/FAN5_PULSE1	/FAN5_PULSE1	GND	/FAN5_PULSE2	/FAN5_PULSE3	GND
10	/FAN5_PULSE5	/FAN6_PULSE1	GND	/FAN6_PULSE2	/FAN6_PULSE3	GND

CNP114

	A	B	BG	C	D	DG
1	/FAN6_PULSE4	/FAN6_PULSE5	GND	FAN1_CTRL	FAN2_CTRL	GND
2	FAN3_CTRL	FAN4_CTRL	GND	/FAN5_CTRL	/FAN6_CTRL	GND
3	PS1_B_LED		GND	PS1_FAN_ERR	PS1_THR_ERR	GND
4	PS1_EXIST		GND	PS1_DC_ERR	PS1_AC_ERR	GND
5	PS2_B_LED		GND	PS2_FAN_ERR	PS2_THR_ERR	GND
6	PS2_EXIST		GND	PS2_DC_ERR	PS2_AC_ERR	GND
7	PS3_B_LED		GND	PS3_FAN_ERR	PS3_THR_ERR	GND
8	PS3_EXIST		GND	PS3_DC_ERR	PS3_AC_ERR	GND
9	PS4_B_LED		GND	PS4_FAN_ERR	PS4_THR_ERR	GND
10	PS4_EXIST		GND	PS4_DC_ERR	PS4_AC_ERR	GND

B SIDE CN-3233

CNB214

	A	B	BG	C	D	DG
1	RESET0	RESET1	GND	RESET2	RESET3	GND
2	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
3	GND (SLOT_N+4)	GND (SLOT_N+5)	GND	GND (SLOT_N+6)	GND (SLOT_N+7)	GND
4	GND (SLOT_N+0)	(SLOT_N+1)	GND	(SLOT_N+2)	(SLOT_N+3)	GND
5	BD_EXT_13F	BD_EXT_13R	GND	SD-HD1	SD-HD2	GND
6	DC_ENBL0	DC_ENBL1	GND	SD-HD0	FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CNE214

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND	/SG_SEL		GND
5	CA101DAT	/EXTHUB1_MDO	GND	CA102DAT		GND
6	CA101CLK	CA102CLK	GND	/EXTHUB_RESET	/EXTHUB_RESET	GND
7	/EXTHUB_CTRL4	/EXTHUB_CTRL5	GND	/EXTHUB_CTRL6	/EXTHUB_CTRL7	GND
8	/EXTHUB_CTRL0	/EXTHUB_CTRL1	GND	/EXTHUB_CTRL2	/EXTHUB_CTRL3	GND
9	/REF_RESERVE		GND	/REF_RESERVE		GND
10			GND	/TC_1N	/REF_1N	GND

CNF214

	A	B	BG	C	D	DG
1	/GBE3_TRX0P	/GBE3_TRX0N	GND	/GBE3_TRX1P	/GBE3_TRX1N	GND
2	/GBE3_TRX2P	/GBE3_TRX2N	GND	/GBE3_TRX3P	/GBE3_TRX3N	GND
3	/GBE2_LED_LJ	/GBE2_LED_RI	GND	/GBE3_LED_LJ	/GBE3_LED_RI	GND
4	/GBE2_TRX0P	/GBE2_TRX0N	GND	/GBE2_TRX1P	/GBE2_TRX1N	GND
5	/GBE2_TRX2P	/GBE2_TRX2N	GND	/GBE2_TRX3P	/GBE2_TRX3N	GND
6	/GBE1_TRX0P	/GBE1_TRX0N	GND	/GBE1_TRX1P	/GBE1_TRX1N	GND
7	/GBE1_TRX2P	/GBE1_TRX2N	GND	/GBE1_TRX3P	/GBE1_TRX3N	GND
8	/GBE0_LED_LJ	/GBE0_LED_RI	GND	/GBE1_LED_LJ	/GBE1_LED_RI	GND
9	/GBE0_TRX0P	/GBE0_TRX0N	GND	/GBE0_TRX1P	/GBE0_TRX1N	GND
10	/GBE0_TRX2P	/GBE0_TRX2N	GND	/GBE0_TRX3P	/GBE0_TRX3N	GND

CNJ114

	A	B	BG	C	D	DG
1						
2						
3						
4						
5	/NET1_TRX0P	/NET1_TRX0N	GND	/NET1_TRX1P	/NET1_TRX1N	GND
6	/NET1_TRX2P	/NET1_TRX2N	GND	/NET1_TRX3P	/NET1_TRX3N	GND
7	/NET2_TRX0P	/NET2_TRX0N	GND	/NET2_TRX1P	/NET2_TRX1N	GND
8	/NET2_TRX2P	/NET2_TRX2N	GND	/NET2_TRX3P	/NET2_TRX3N	GND
9	/NET3_TRX0P	/NET3_TRX0N	GND	/NET3_TRX1P	/NET3_TRX1N	GND
10	/NET3_TRX2P	/NET3_TRX2N	GND	/NET3_TRX3P	/NET3_TRX3N	GND

CNK114

	A	B	BG	C	D	DG
1						
2	/NET4_TRX0P	/NET4_TRX0N	GND	/NET4_TRX1P	/NET4_TRX1N	GND
3	/NET4_TRX2P	/NET4_TRX2N	GND	/NET4_TRX3P	/NET4_TRX3N	GND
4	/NET5_TRX0P	/NET5_TRX0N	GND	/NET5_TRX1P	/NET5_TRX1N	GND
5	/NET5_TRX2P	/NET5_TRX2N	GND	/NET5_TRX3P	/NET5_TRX3N	GND
6						
7	/NET6_TRX0P	/NET6_TRX0N	GND	/NET6_TRX1P	/NET6_TRX1N	GND
8	/NET6_TRX2P	/NET6_TRX2N	GND	/NET6_TRX3P	/NET6_TRX3N	GND
9	/NET7_TRX0P	/NET7_TRX0N	GND	/NET7_TRX1P	/NET7_TRX1N	GND
10	/NET7_TRX2P	/NET7_TRX2N	GND	/NET7_TRX3P	/NET7_TRX3N	GND

CNL114

	A	B	BG	C	D	DG
1						
2						
3						
4						
5	/NET1_TRX0P	/NET1_TRX0N	GND	/NET1_TRX1P	/NET1_TRX1N	GND
6	/NET1_TRX2P	/NET1_TRX2N	GND	/NET1_TRX3P	/NET1_TRX3N	GND
7	/NET2_TRX0P	/NET2_TRX0N	GND	/NET2_TRX1P	/NET2_TRX1N	GND
8	/NET2_TRX2P	/NET2_TRX2N	GND	/NET2_TRX3P	/NET2_TRX3N	GND
9	/NET3_TRX0P	/NET3_TRX0N	GND	/NET3_TRX1P	/NET3_TRX1N	GND
10	/NET3_TRX2P	/NET3_TRX2N	GND	/NET3_TRX3P	/NET3_TRX3N	GND

CNM214

	A	B	BG	C	D	DG
1	GP12_OUT6	GP12_IN6	GND	GP11_OUT6	GP11_IN6	GND
2	GP12_OUT5	GP12_IN5	GND	GP11_OUT5	GP11_IN5	GND
3	GP12_OUT4	GP12_IN4	GND	GP11_OUT4	GP11_IN4	GND
4	GP12_OUT3	GP12_IN3	GND	GP11_OUT3	GP11_IN3	GND
5	GP12_OUT2	GP12_IN2	GND	GP11_OUT2	GP11_IN2	GND
6	GP12_OUT1	GP12_IN1	GND	GP11_OUT1	GP11_IN1	GND
7	RS422_4_TXP	RS422_4_TXN	GND	RS422_4_RXP	RS422_4_RXN	GND
8	RS422_3_TXP	RS422_3_TXN	GND	RS422_3_RXP	RS422_3_RXN	GND
9	RS422_2_TXP	RS422_2_TXN	GND	RS422_2_RXP	RS422_2_RXN	GND
10	RS422_1_TXP	RS422_1_TXN	GND	RS422_1_RXP	RS422_1_RXN	GND

CNN214

	A	B	BG	C	D	DG
1	/FAN5_PULSE5	/FAN6_PULSE1	GND	/FAN6_PULSE2	/FAN6_PULSE3	GND
2	/FAN5_PULSE1	/FAN5_PULSE1	GND	/FAN5_PULSE2	/FAN5_PULSE3	GND
3	FAN4_PULSE2	FAN4_PULSE3	GND	FAN4_PULSE4	FAN4_PULSE5	GND
4	FAN3_PULSE3	FAN3_PULSE4	GND	FAN3_PULSE5	FAN4_PULSE1	GND
5	FAN2_PULSE4	FAN2_PULSE5	GND	FAN3_PULSE1	FAN3_PULSE2	GND
6	FAN1_PULSE5	FAN2_PULSE1	GND	FAN2_PULSE2	FAN2_PULSE3	GND
7	FAN1_PULSE1	FAN1_PULSE2	GND	FAN1_PULSE3	FAN1_PULSE4	GND
8	/POW_SEQ0	GND /POW_SEQ1	GND			GND
9	GP12_OUT8	GP12_IN8	GND	GP11_OUT8	GP11_IN8	GND
10	GP12_OUT7	GP12_IN7	GND	GP11_OUT7	GP11_IN7	GND

CNB114	CNC114	CND114	CNE114	CNF114
CNB214			CNE214	CNF214

CNJ114	CNK114	CNL114	CNM114	CNN114	CNP114
			CNM214	CNN114	

SLOT14
CA/CA IF

MB-1151 (14/16)
BOARD NO. 1-879-563-11
MVS-8000X_MB-1151_001_14

4-184

A B C D E F G H

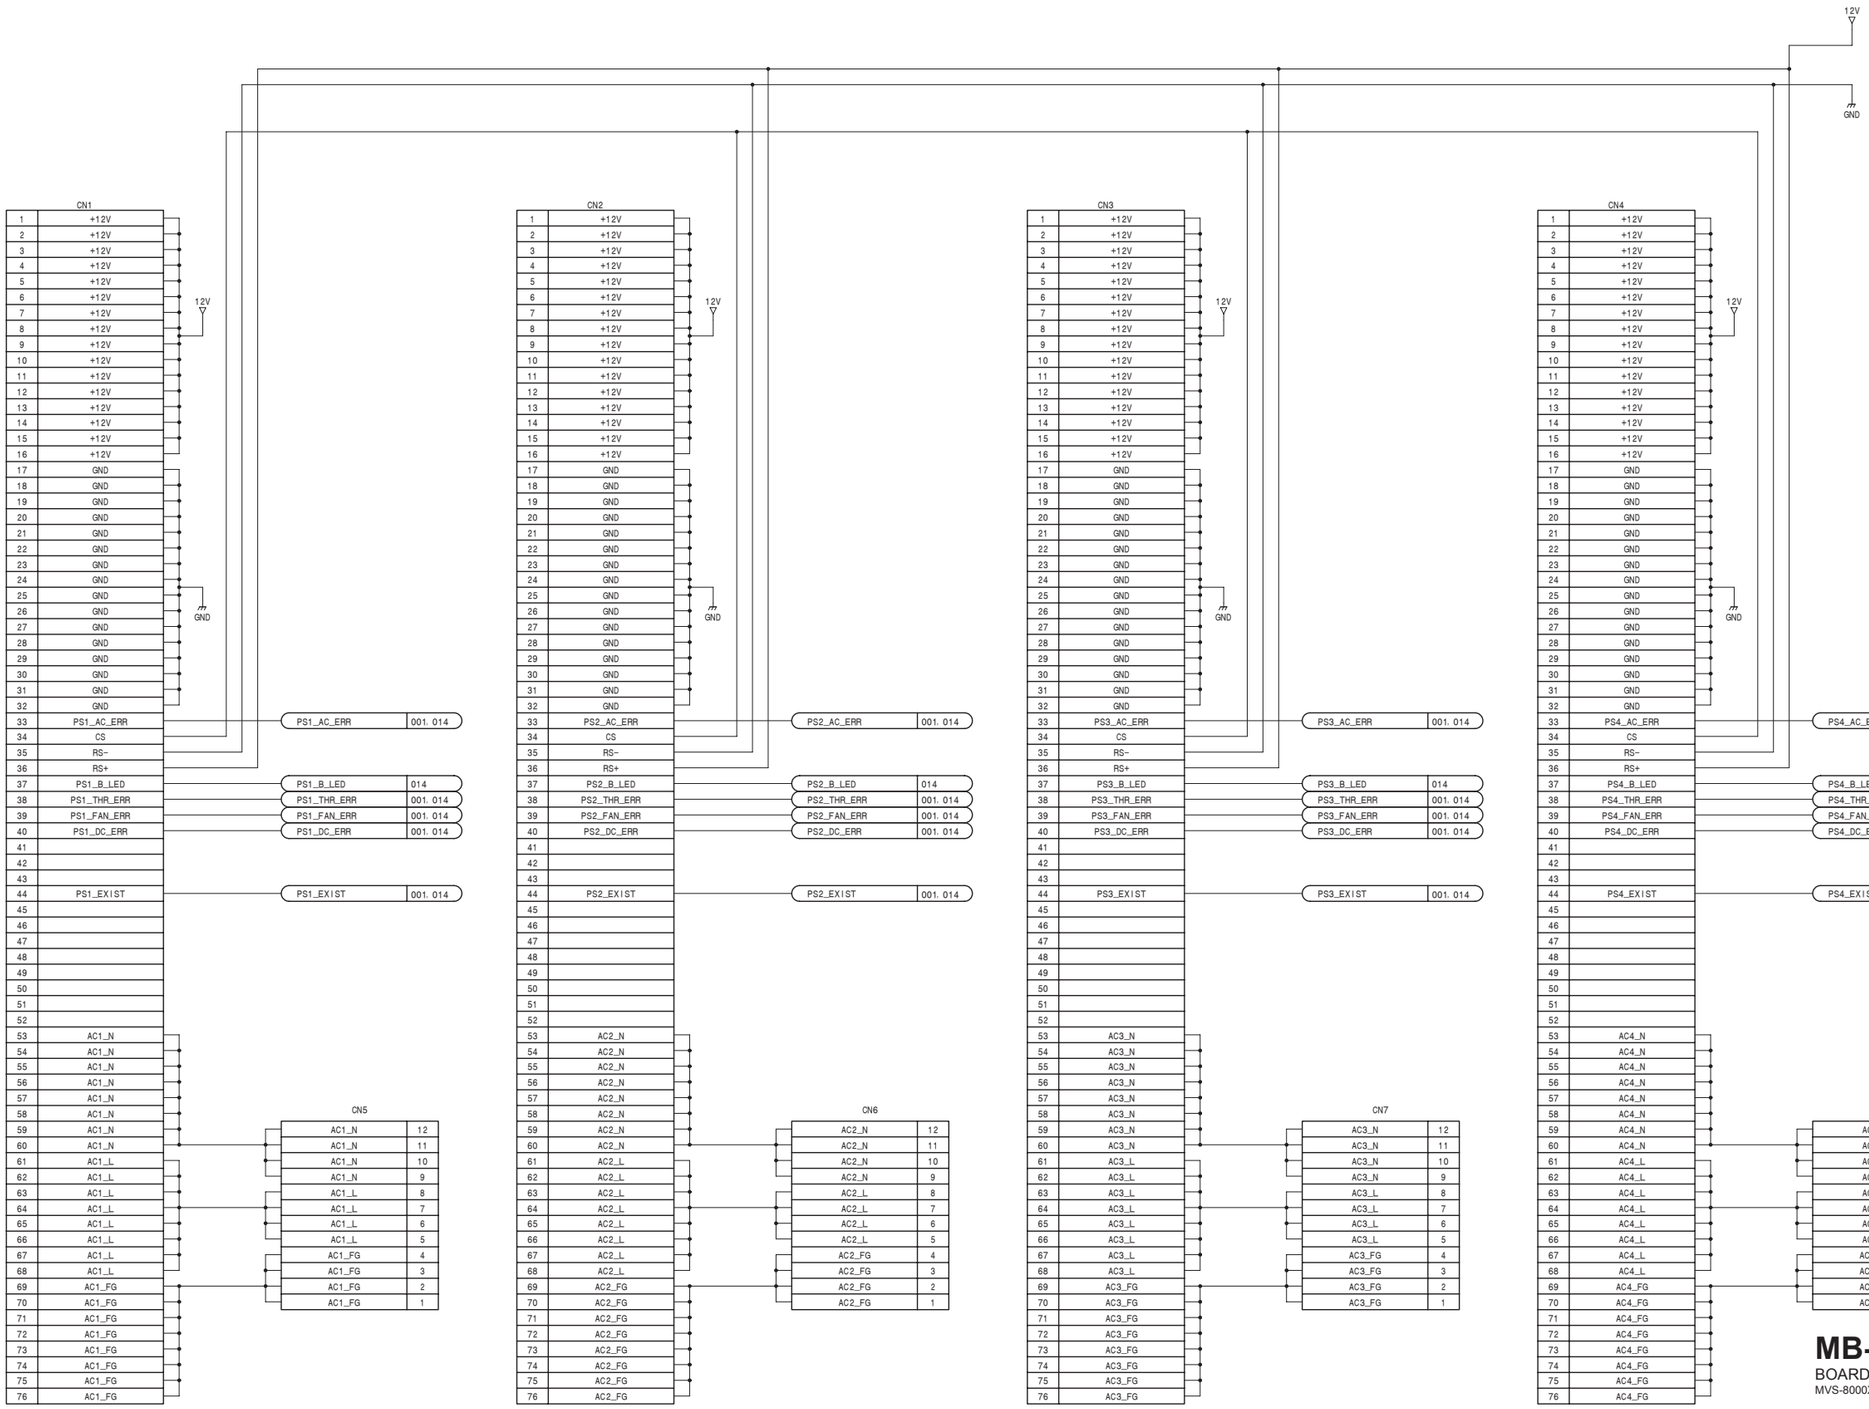

MB-1151 (15/16)

BOARD NO. 1-879-563-11

MVS-8000X_MB-1151_001_15

CNS202

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN1_PULSE1	FAN1_PULSE2	FAN1_PULSE3	FAN1_PULSE4
6	FAN1_PULSE5		FAN1_CTRL	

CNS206

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN2_PULSE1	FAN2_PULSE2	FAN2_PULSE3	FAN2_PULSE4
6	FAN2_PULSE5		FAN2_CTRL	

CNS210

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN3_PULSE1	FAN3_PULSE2	FAN3_PULSE3	FAN3_PULSE4
6	FAN3_PULSE5		FAN3_CTRL	

CNS214

	A	B	C	D
1	12V	12V	12V	12V
2				
3	GND	GND	GND	GND
4				
5	FAN4_PULSE1	FAN4_PULSE2	FAN4_PULSE3	FAN4_PULSE4
6	FAN4_PULSE5		FAN4_CTRL	

MB-1151 (16/16)

BOARD NO. 1-879-563-11

MVS-8000X_MB-1151_001_16

MIX-53 (1/48)
SUFFIX: -13

Leftmost

(MB : CNA)

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET	DC_ENBL	GND	(for Rear)	FUSE+12V	GND
6	GND (BD_EXT_SLF)	(for Rear)	GND	(for Rear)	(for Rear)	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9			GND			GND
10			GND			GND

(MB : CNB)

CNC1

	A	B	BG	C	D	DG
1	VCLKP	VCLKN	GND			GND
2	FDP	FDN	GND	VDP	VDN	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET_TRX0P	INET_TRX0N	GND	INET_TRX1P	INET_TRX1N	GND
7	INET_TRX2P	INET_TRX2N	GND	INET_TRX3P	INET_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE1

	A	B	BG	C	D	DG
1	ME_KEY6_SRCBP	ME_KEY6_SRCBN	GND	ME_KEY2_SRCBP	ME_KEY2_SRCBN	GND
2	ME_KEY6_SRCAP	ME_KEY6_SRCAN	GND	ME_KEY2_SRCAP	ME_KEY2_SRCAN	GND
3	ME_KEY6_F ILBP	ME_KEY6_F ILBN	GND	ME_KEY2_F ILBP	ME_KEY2_F ILBN	GND
4	ME_OUT8P	ME_OUT8N	GND	ME_KEY2_F ILAP	ME_KEY2_F ILAN	GND
5	ME_OUT7P	ME_OUT7N	GND	ME_KEY6_F ILAP	ME_KEY6_F ILAN	GND
6	ME_OUT6P	ME_OUT6N	GND	ME_KEY5_SRCBP	ME_KEY5_SRCBN	GND
7	ME_OUT5P	ME_OUT5N	GND	ME_KEY1_SRCBP	ME_KEY1_SRCBN	GND
8	ME_KEY5_SRCAP	ME_KEY5_SRCAN	GND	ME_KEY1_SRCAP	ME_KEY1_SRCAN	GND
9	ME_KEY5_F ILBP	ME_KEY5_F ILBN	GND	ME_KEY1_F ILBP	ME_KEY1_F ILBN	GND
10	ME_KEY5_F ILAP	ME_KEY5_F ILAN	GND	ME_KEY1_F ILAP	ME_KEY1_F ILAN	GND

CNG1

	A	B	BG	C	D	DG
1			GND	ME_EXT_DMEBP	ME_EXT_DMEBN	GND
2			GND	ME_EXT_DMEAP	ME_EXT_DMEAN	GND
3	ME_BGCOLP	ME_BGCOLN	GND			GND
4			GND	ME_UTIL3BP	ME_UTIL3BN	GND
5			GND	ME_UTIL3AP	ME_UTIL3AN	GND
6			GND	ME_UTIL2BP	ME_UTIL2BN	GND
7			GND	ME_UTIL2AP	ME_UTIL2AN	GND
8	ME_PROCKP	ME_PROCKN	GND			GND
9			GND	ME_UTIL1BP	ME_UTIL1BN	GND
10	ME_PROCVP	ME_PROCVN	GND	ME_UTIL1AP	ME_UTIL1AN	GND

CNJ1

	A	B	BG	C	D	DG
1	ME_SEND4KP	ME_SEND4KN	GND	ME_MVE4KP	ME_MVE4KN	GND
2	ME_SEND2KP	ME_SEND2KN	GND	ME_MVE2KP	ME_MVE2KN	GND
3			GND			GND
4	ME_SEND4VP	ME_SEND4VN	GND	ME_MVE4VP	ME_MVE4VN	GND
5	ME_SEND2VP	ME_SEND2VN	GND	ME_MVE2VP	ME_MVE2VN	GND
6	ME_SEND3KP	ME_SEND3KN	GND	ME_MVE3KP	ME_MVE3KN	GND
7	ME_SEND1KP	ME_SEND1KN	GND	ME_MVE1KP	ME_MVE1KN	GND
8			GND			GND
9	ME_SEND3VP	ME_SEND3VN	GND	ME_MVE3VP	ME_MVE3VN	GND
10	ME_SEND1VP	ME_SEND1VN	GND	ME_MVE1VP	ME_MVE1VN	GND

CNL1

	A	B	BG	C	D	DG
1	ME_EXT_OUT4P	ME_EXT_OUT4N	GND	ME_DMEKBP	ME_DMEKBN	GND
2			GND	ME_DMEKAP	ME_DMEKAN	GND
3	ME_EXT_OUT3P	ME_EXT_OUT3N	GND			GND
4			GND	ME_DMEVBP	ME_DMEVBN	GND
5			GND	ME_DMEVAP	ME_DMEVAN	GND
6			GND	ME_BKGDBBP	ME_BKGDBBN	GND
7			GND	ME_BKGDBAP	ME_BKGDBAN	GND
8	ME_EXT_OUT2P	ME_EXT_OUT2N	GND			GND
9			GND	ME_BKGDABP	ME_BKGDABN	GND
10	ME_EXT_OUT1P	ME_EXT_OUT1N	GND	ME_BKGDAAP	ME_BKGDAAN	GND

(MB : CNP)

CNN1

	A	B	BG	C	D	DG
1	ME_KEY8_SRCBP	ME_KEY8_SRCBN	GND	ME_KEY4_SRCBP	ME_KEY4_SRCBN	GND
2	ME_KEY8_SRCAP	ME_KEY8_SRCAN	GND	ME_KEY4_SRCAP	ME_KEY4_SRCAN	GND
3	ME_KEY8_F ILBP	ME_KEY8_F ILBN	GND	ME_KEY4_F ILBP	ME_KEY4_F ILBN	GND
4	ME_OUT4P	ME_OUT4N	GND	ME_KEY4_F ILAP	ME_KEY4_F ILAN	GND
5	ME_OUT3P	ME_OUT3N	GND	ME_KEY8_F ILAP	ME_KEY8_F ILAN	GND
6	ME_OUT2P	ME_OUT2N	GND	ME_KEY7_SRCBP	ME_KEY7_SRCBN	GND
7	ME_OUT1P	ME_OUT1N	GND	ME_KEY3_SRCBP	ME_KEY3_SRCBN	GND
8	ME_KEY7_SRCAP	ME_KEY7_SRCAN	GND	ME_KEY3_SRCAP	ME_KEY3_SRCAN	GND
9	ME_KEY7_F ILBP	ME_KEY7_F ILBN	GND	ME_KEY3_F ILBP	ME_KEY3_F ILBN	GND
10	ME_KEY7_F ILAP	ME_KEY7_F ILAN	GND	ME_KEY3_F ILAP	ME_KEY3_F ILAN	GND

Rightmost

MIX-53 (1/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_1

MIX-53 (2/48)
SUFFIX: -13

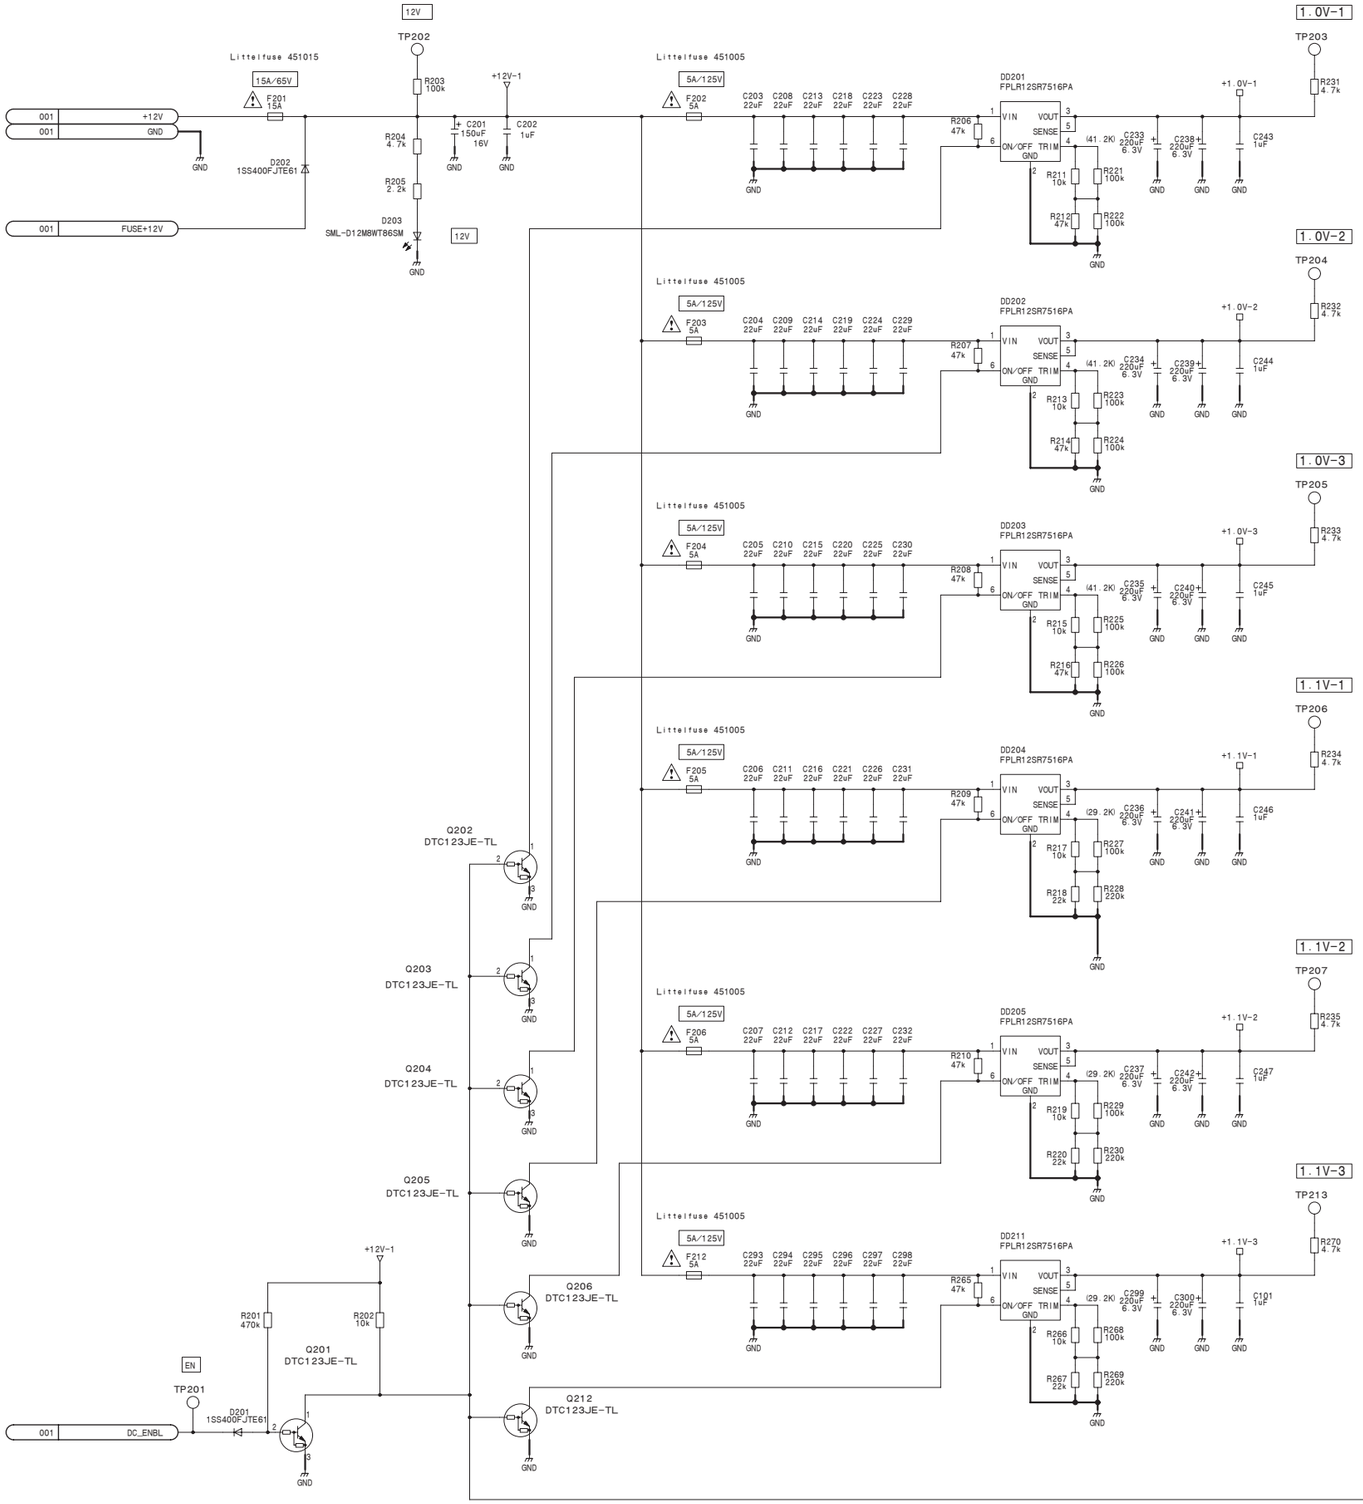

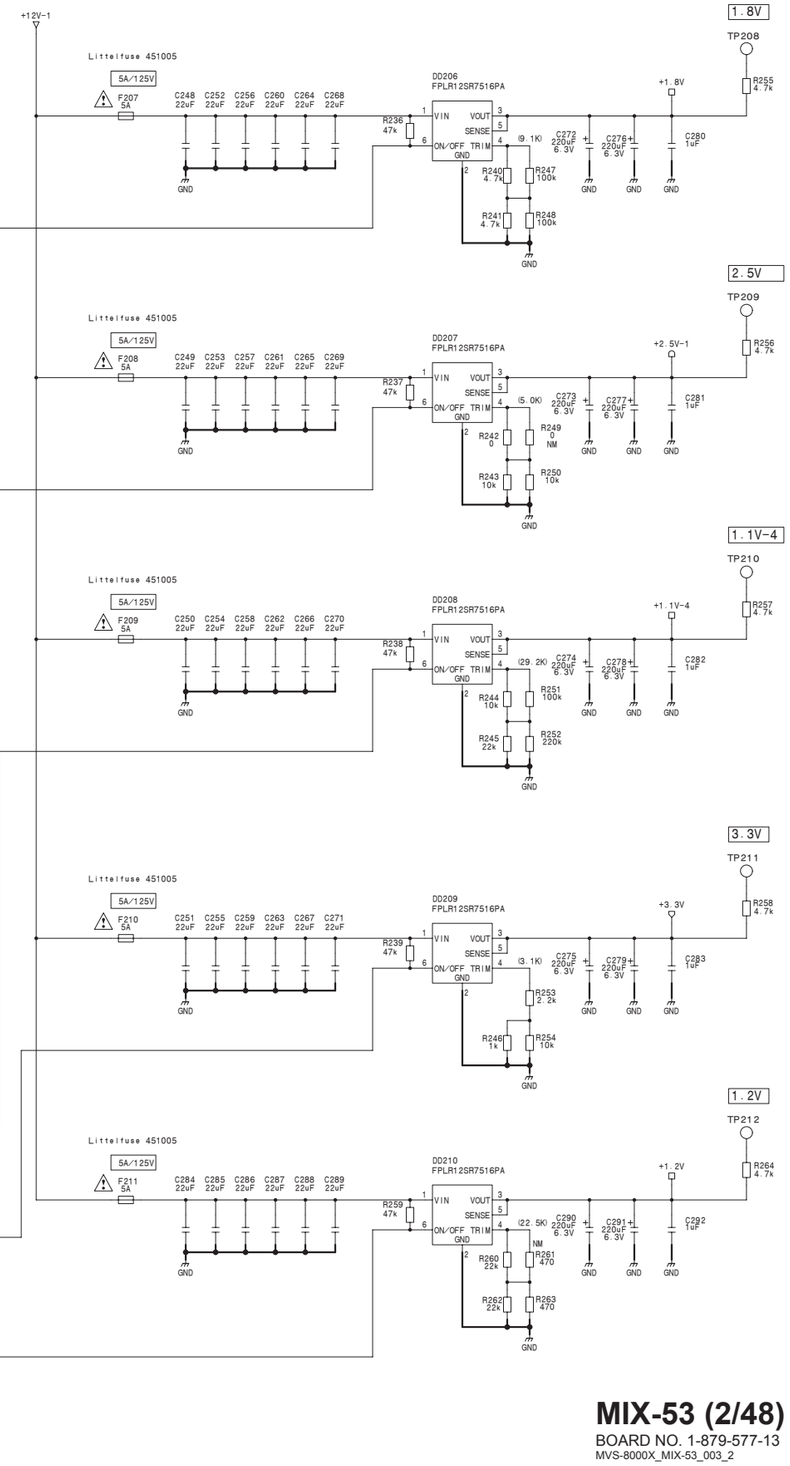

MIX-53 (2/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_2

MIX-53 (3/48)

SUFFIX: -13

MIX-53 (3/48)

SUFFIX: -13

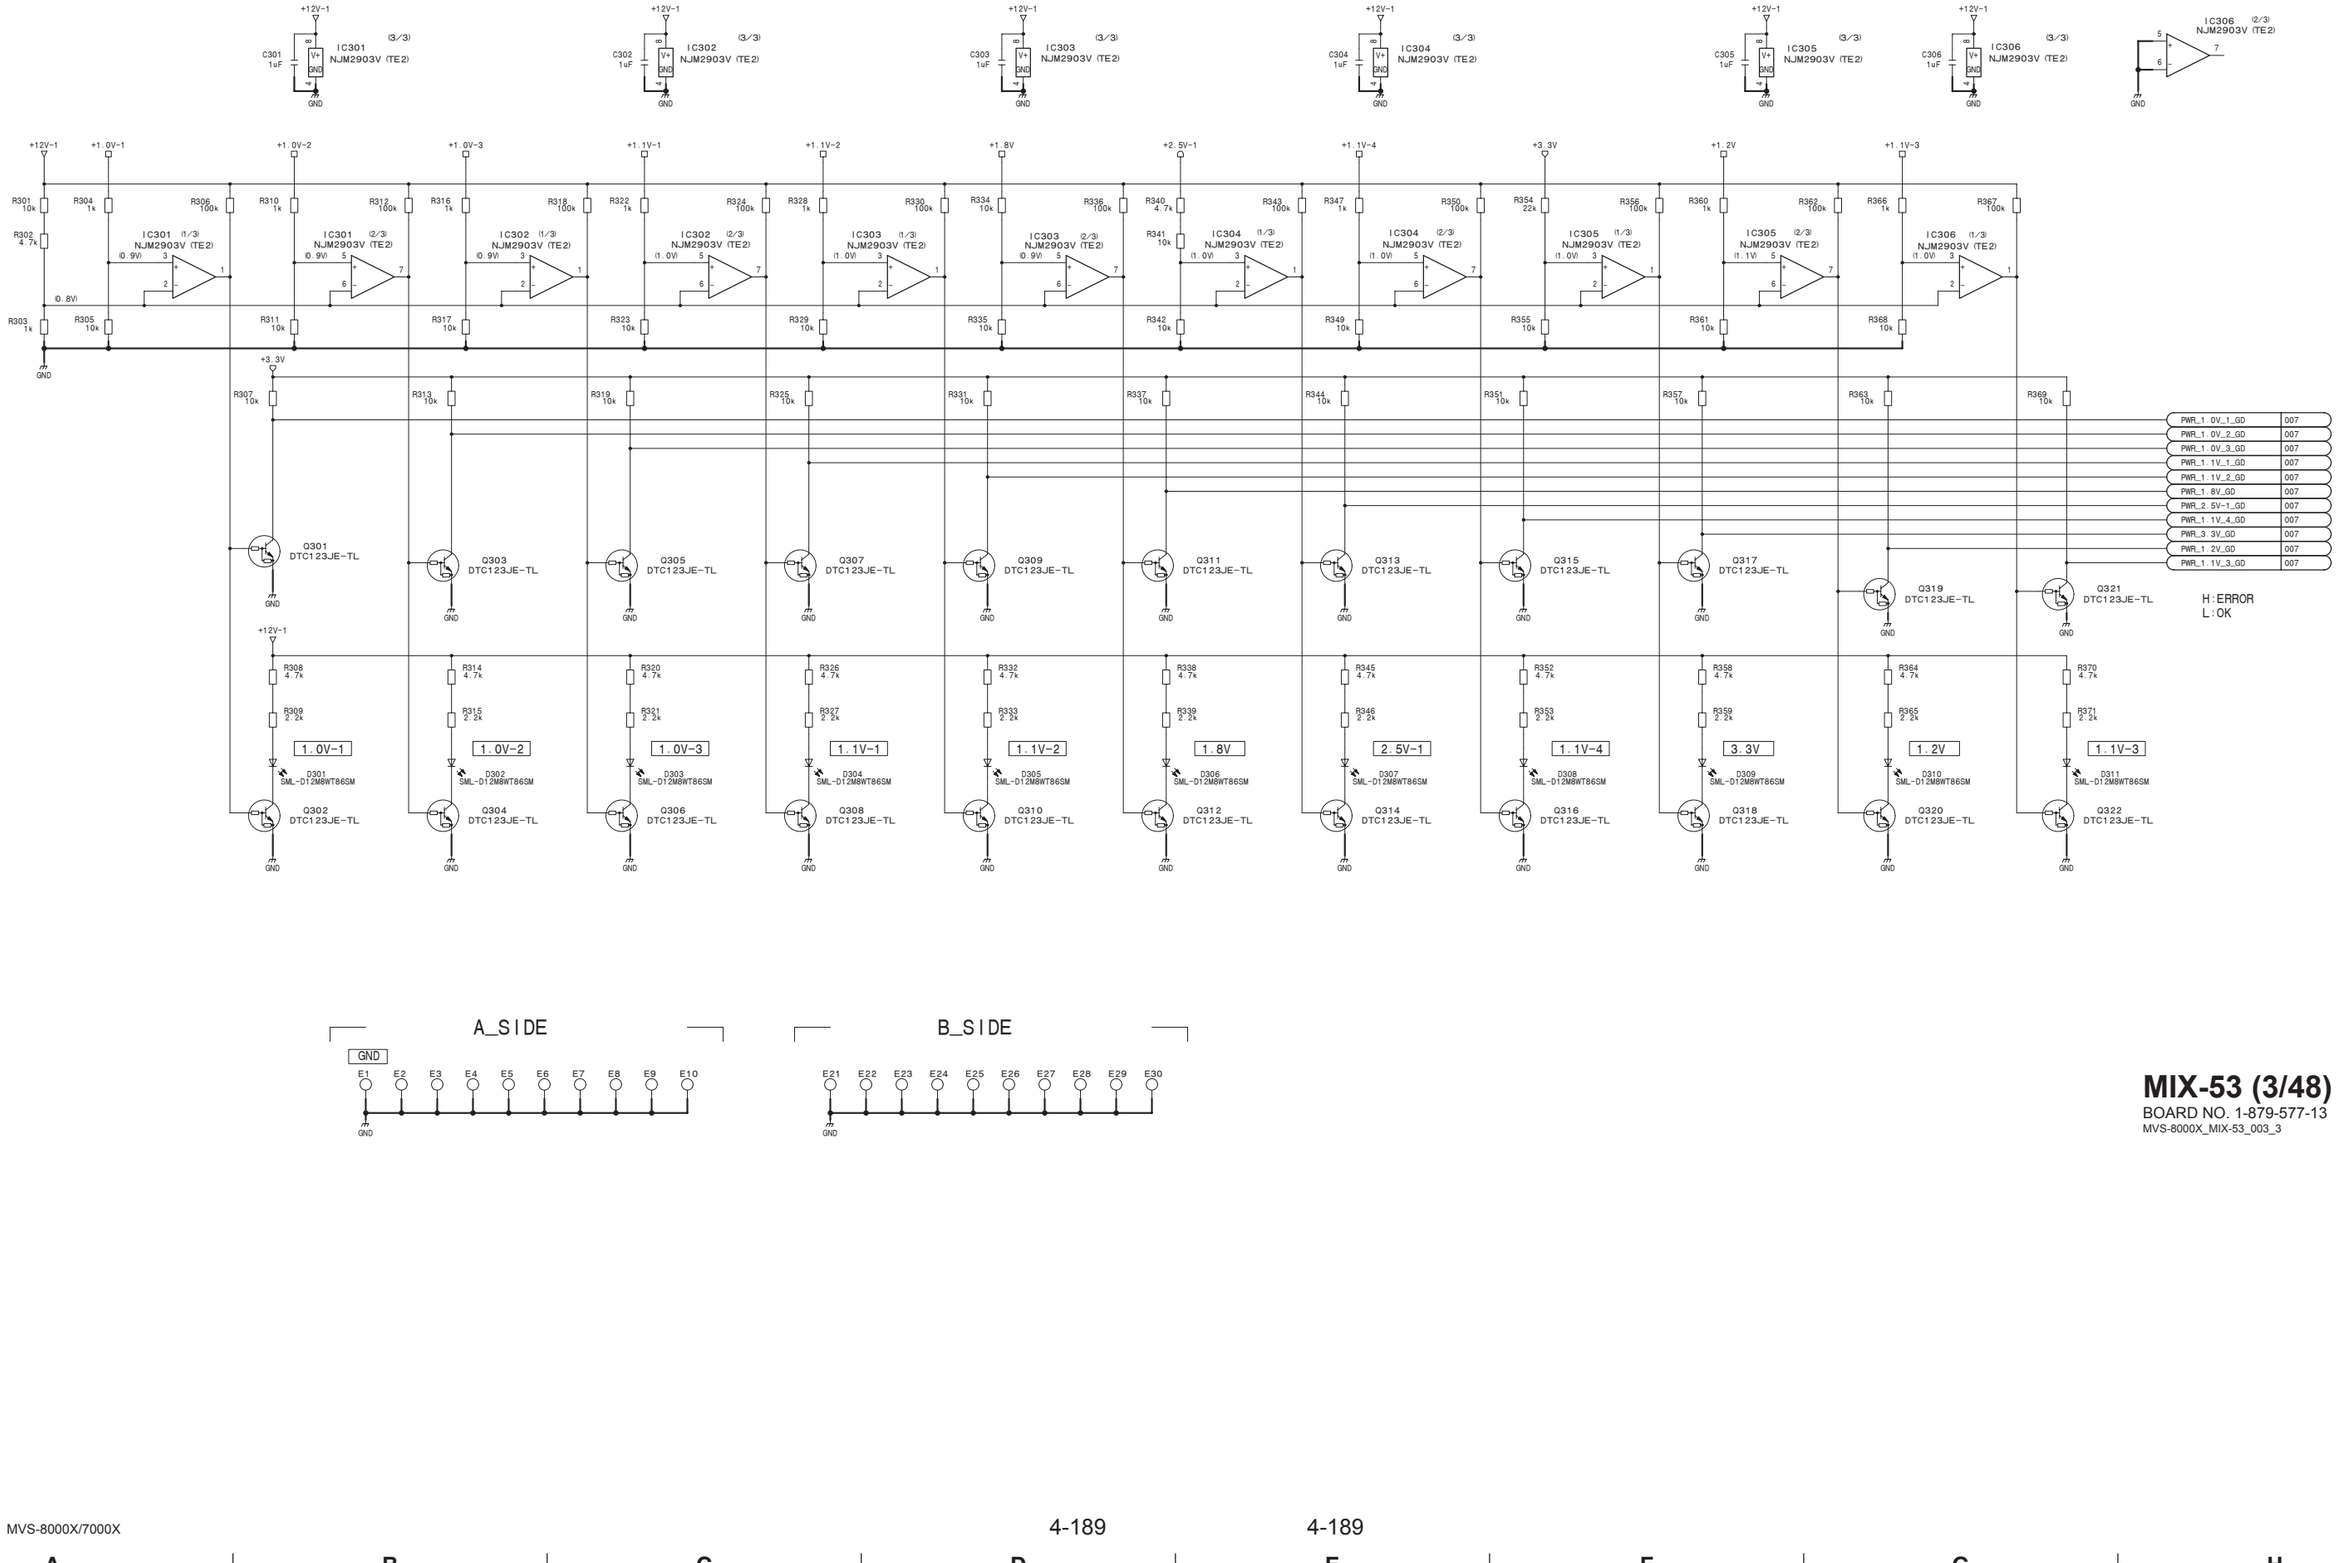

MIX-53 (3/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_3

4-189

MIX-53 (4/48)

SUFFIX: -13

MIX-53 (4/48)

SUFFIX: -13

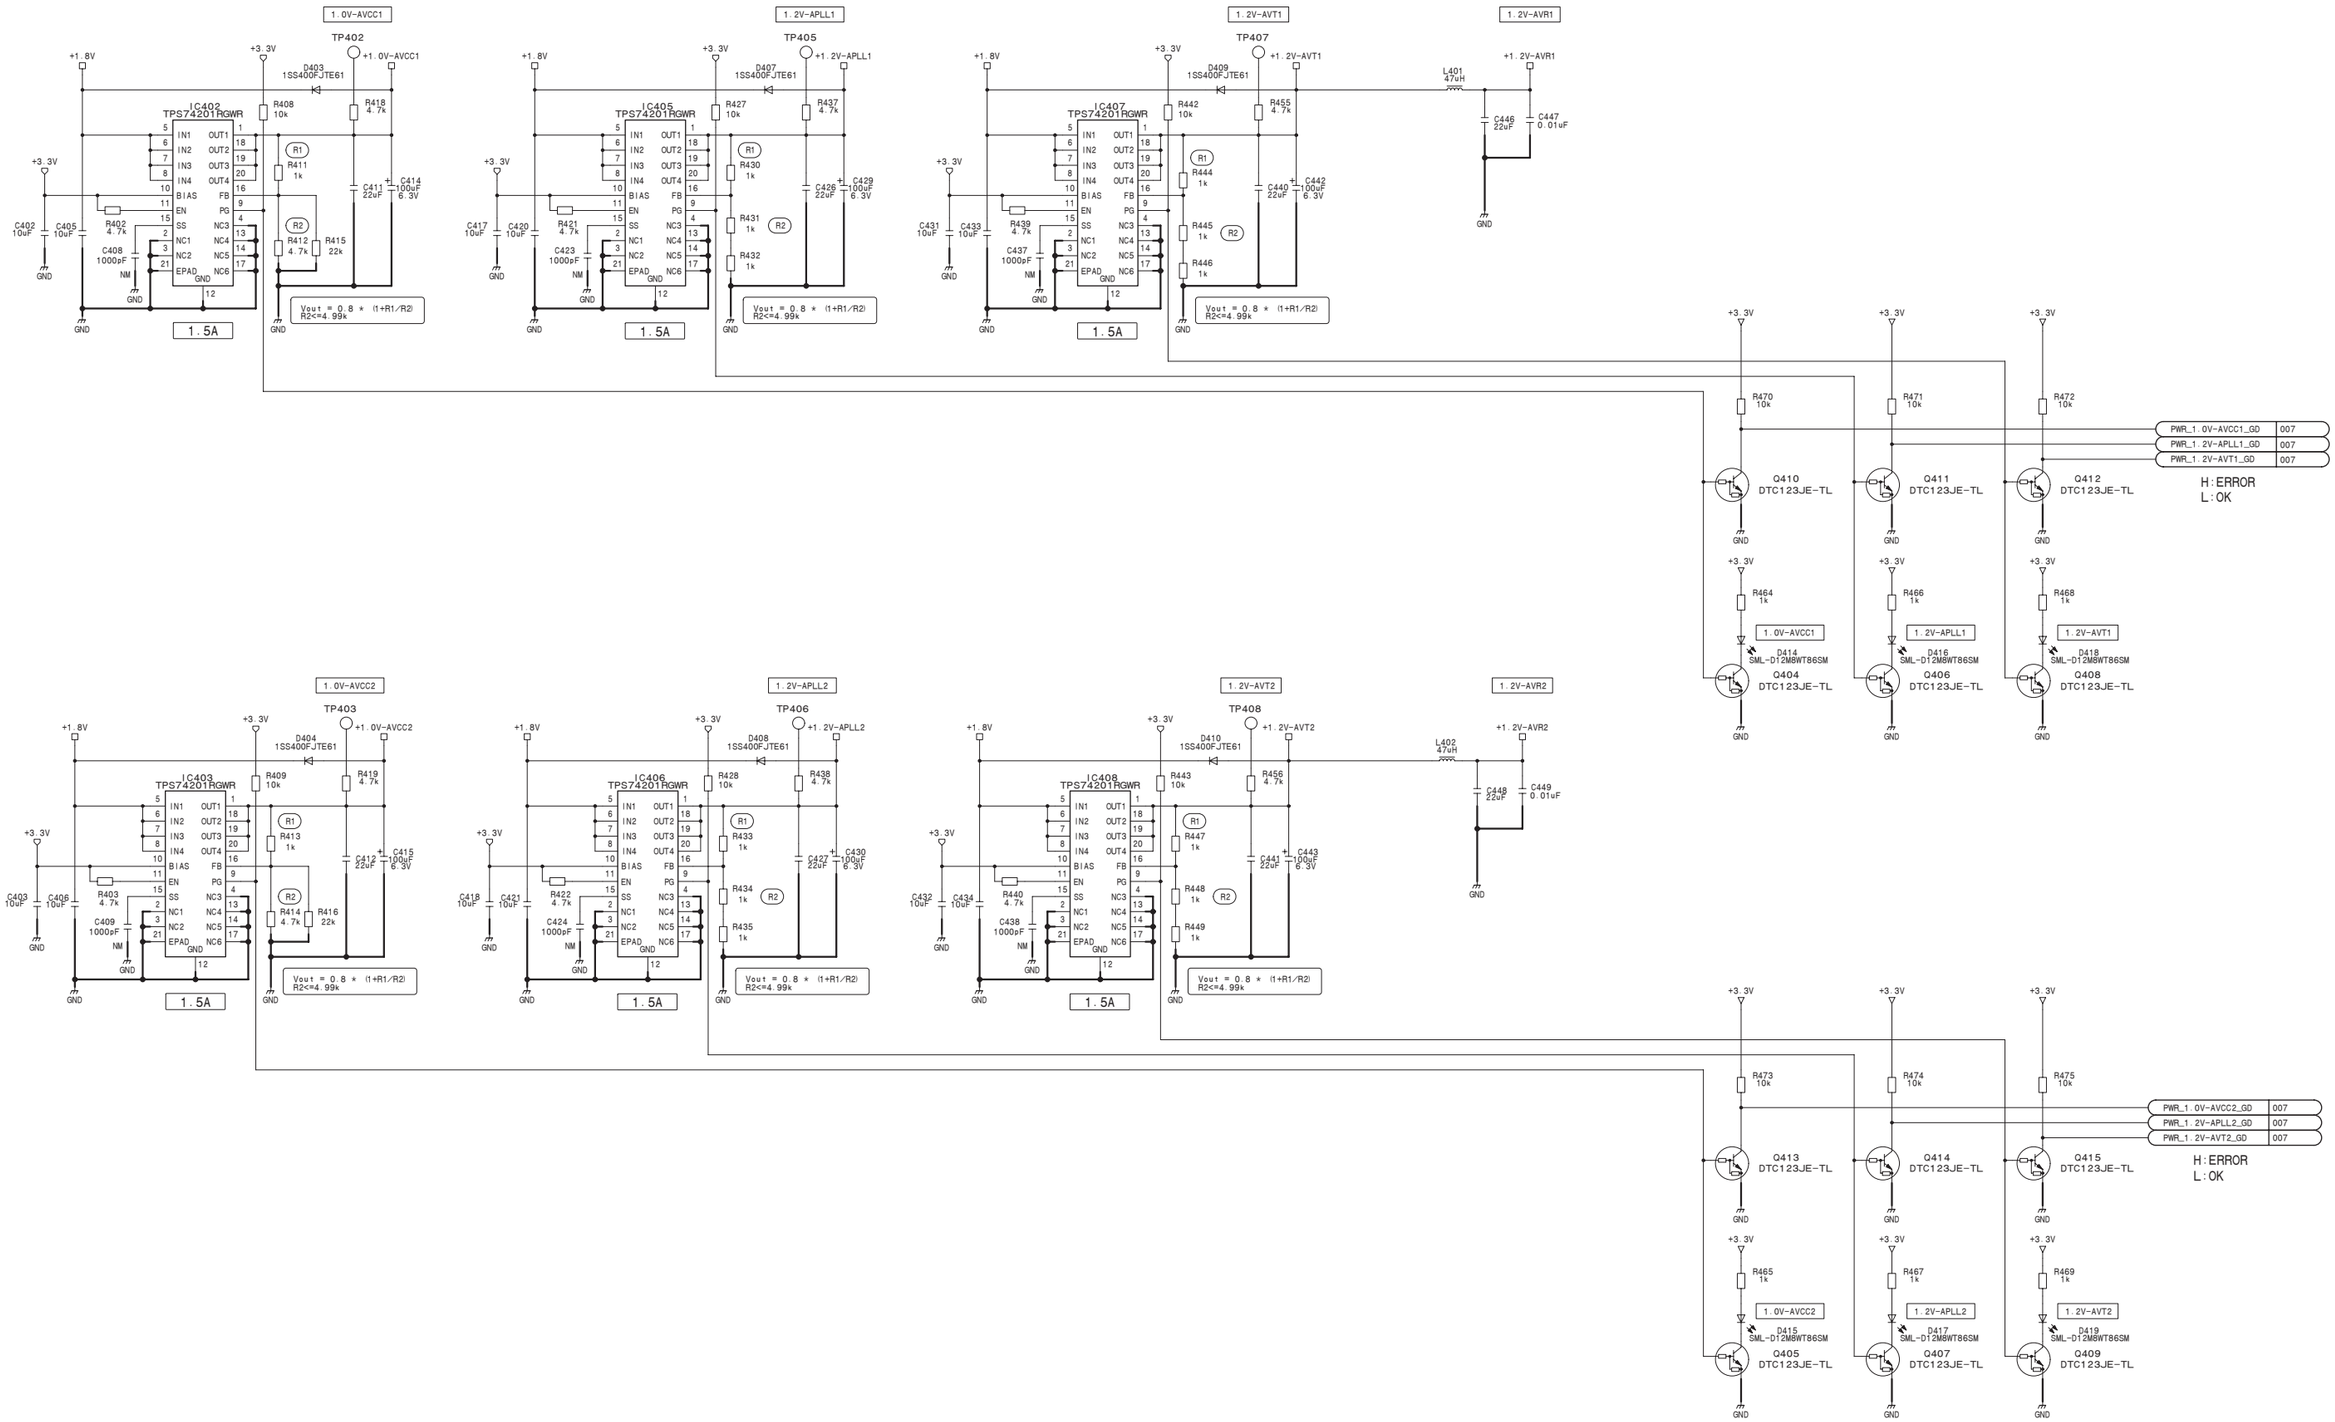

MIX-53 (4/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_4

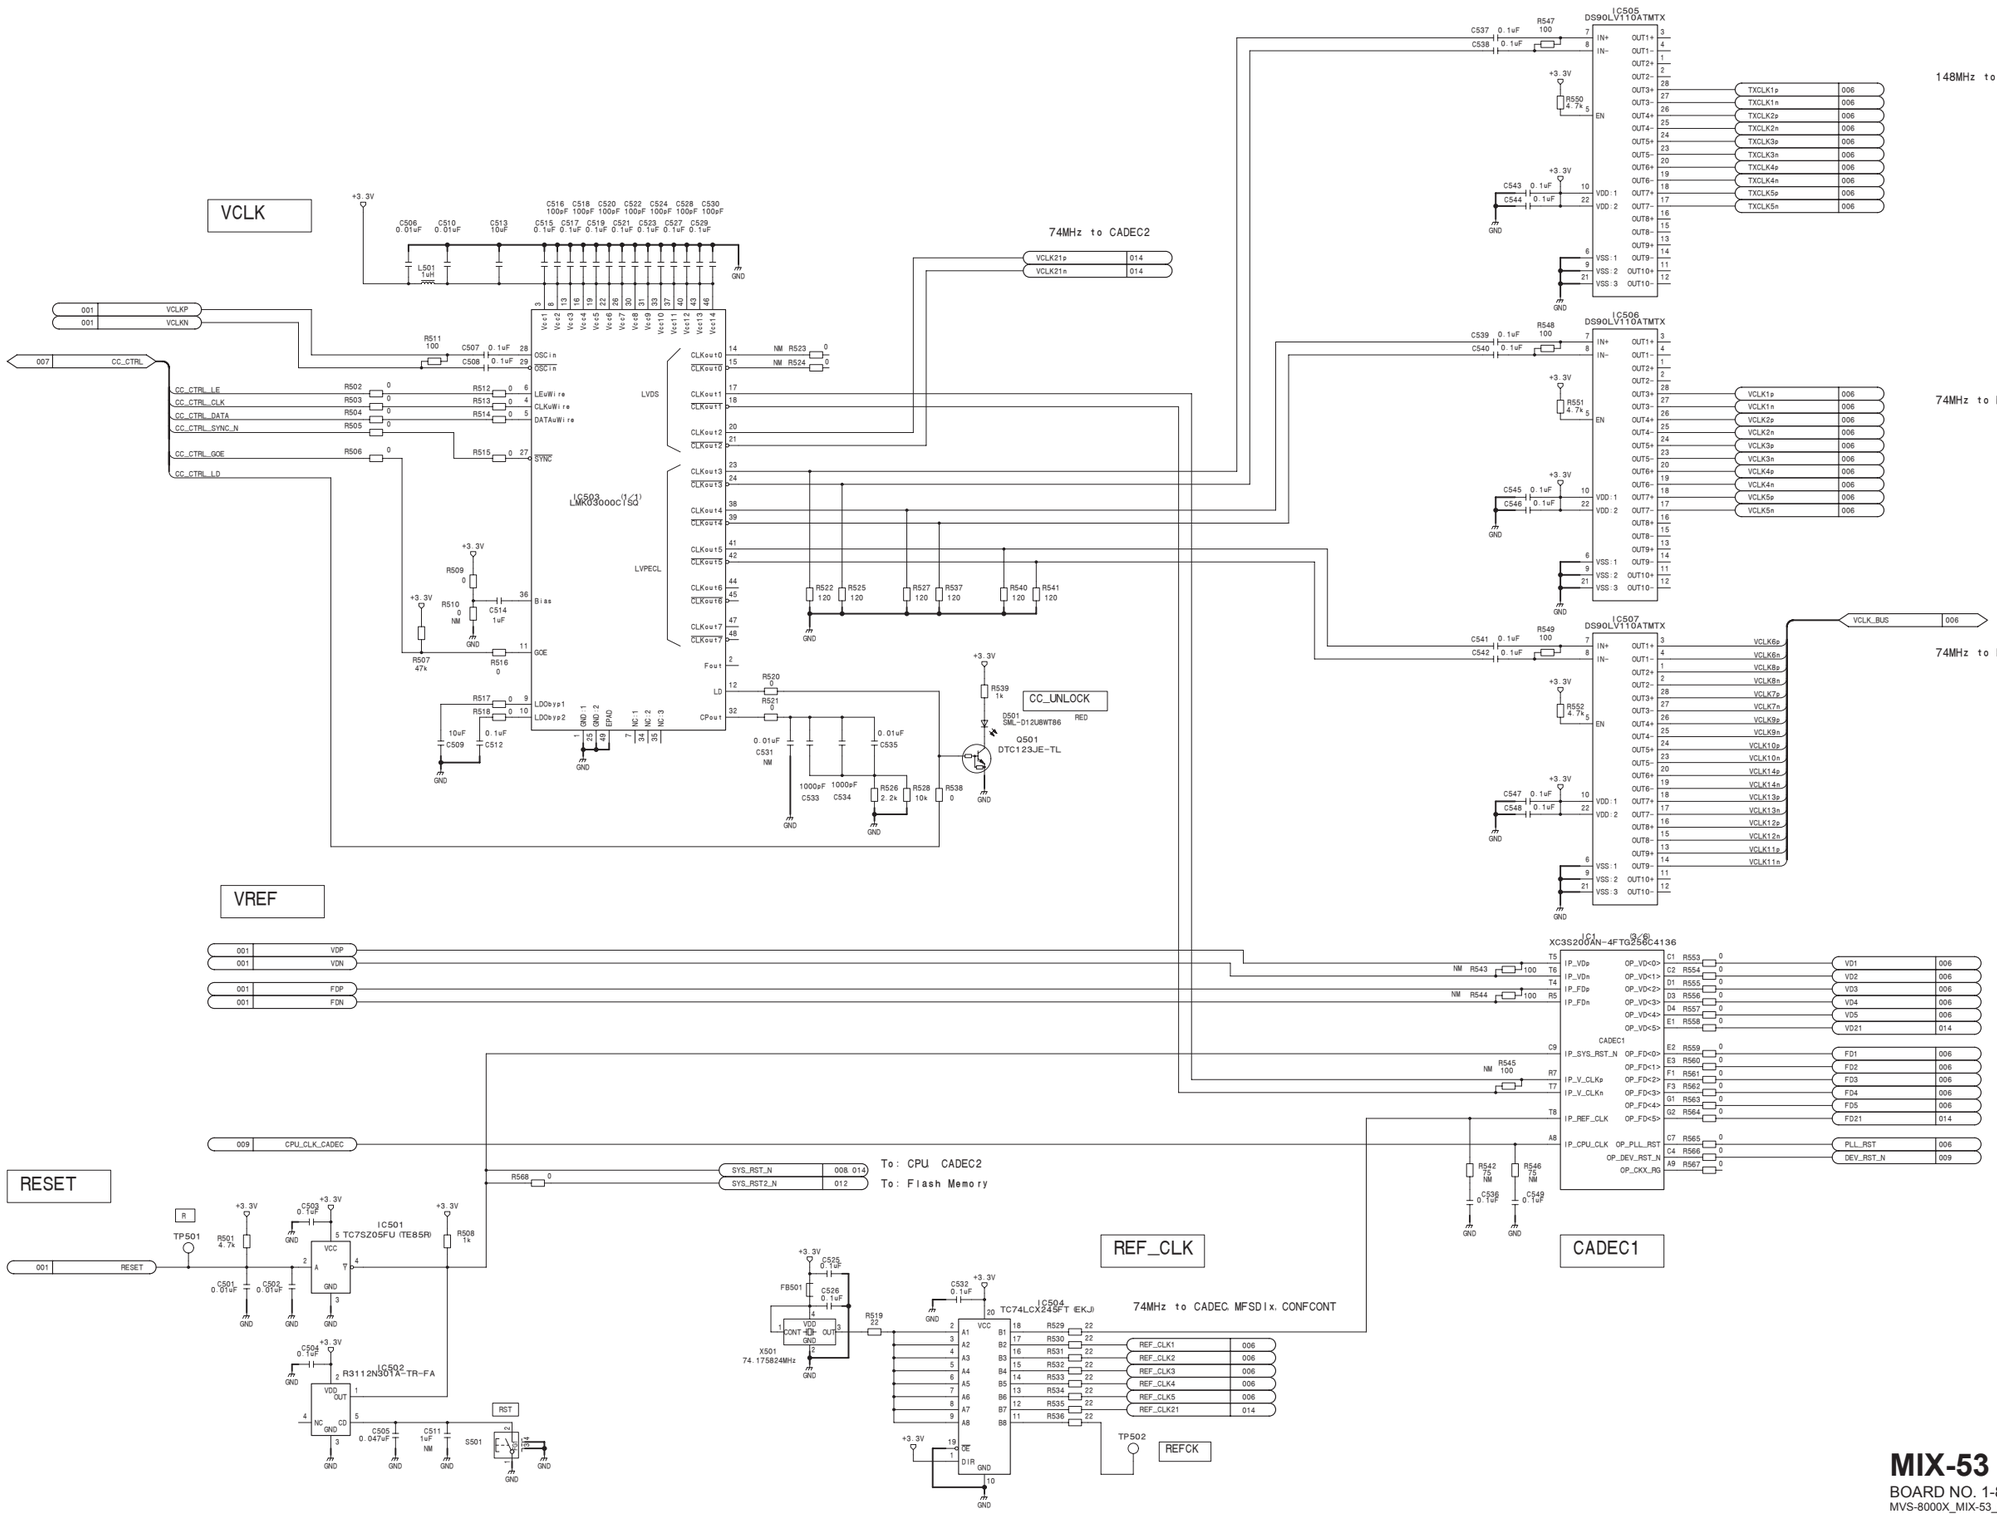

MIX-53 (5/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_5

MIX-53 (6/48)
SUFFIX: -13

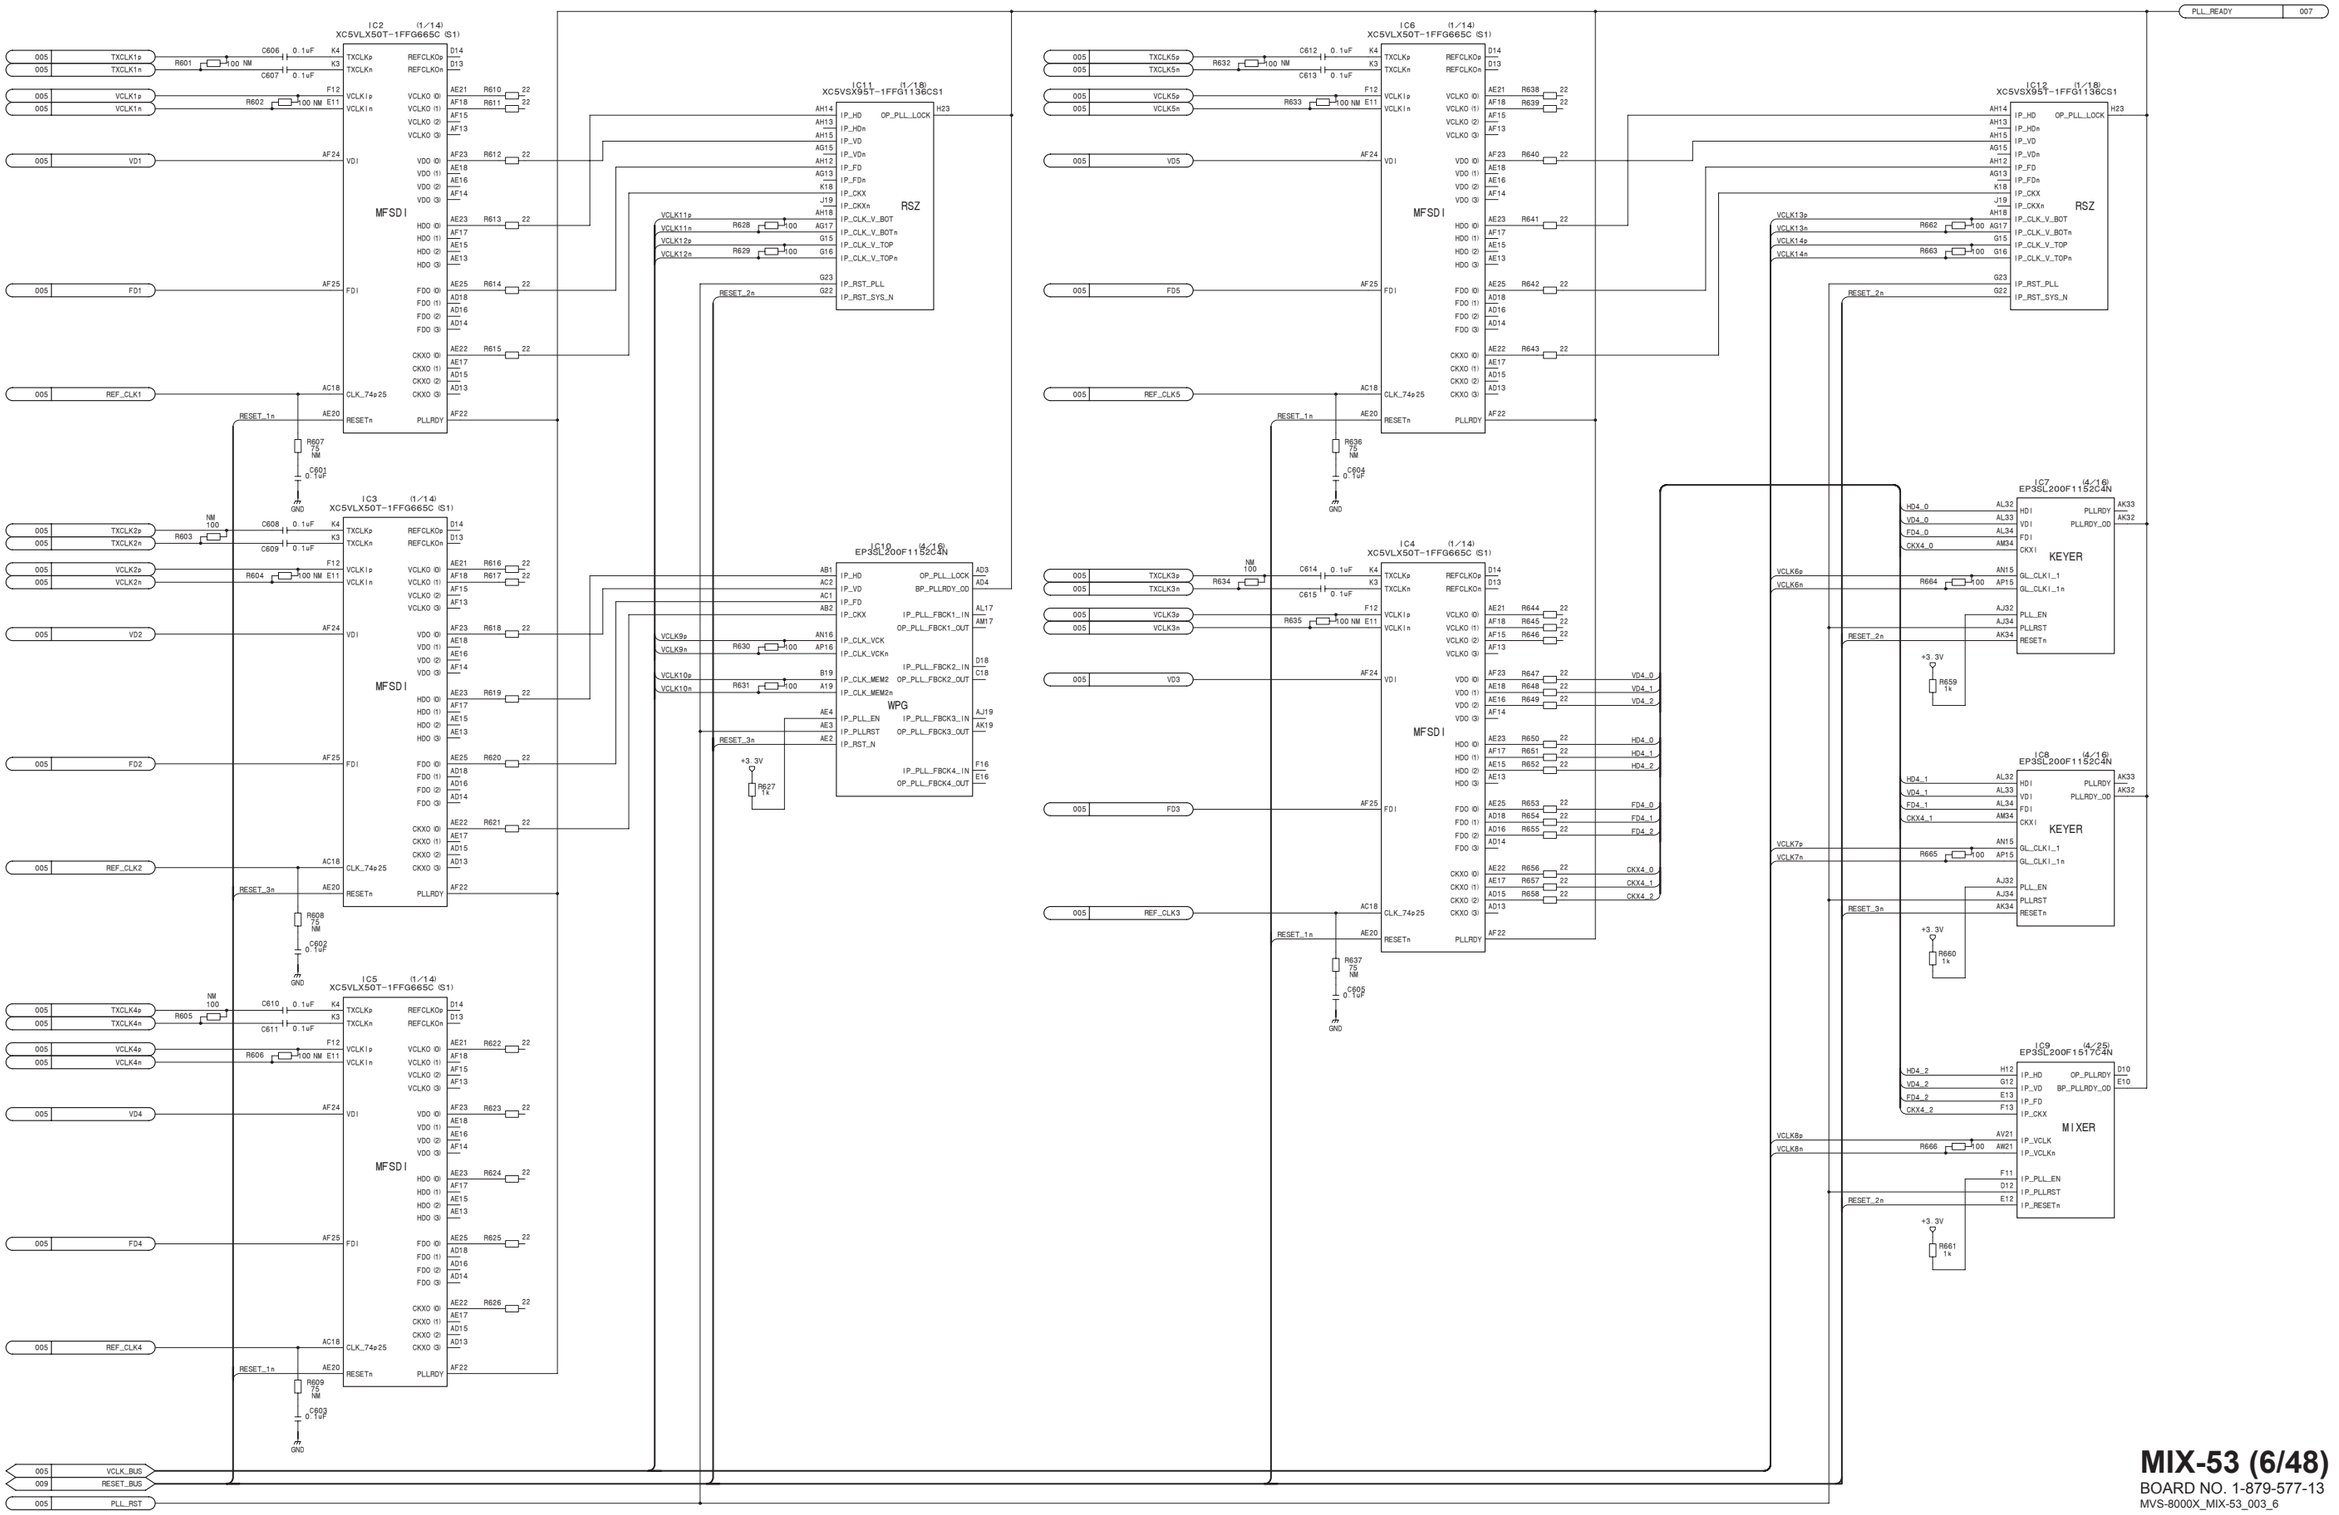

4-192

MIX-53 (6/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_6

MIX-53 (7/48)
SUFFIX: -13

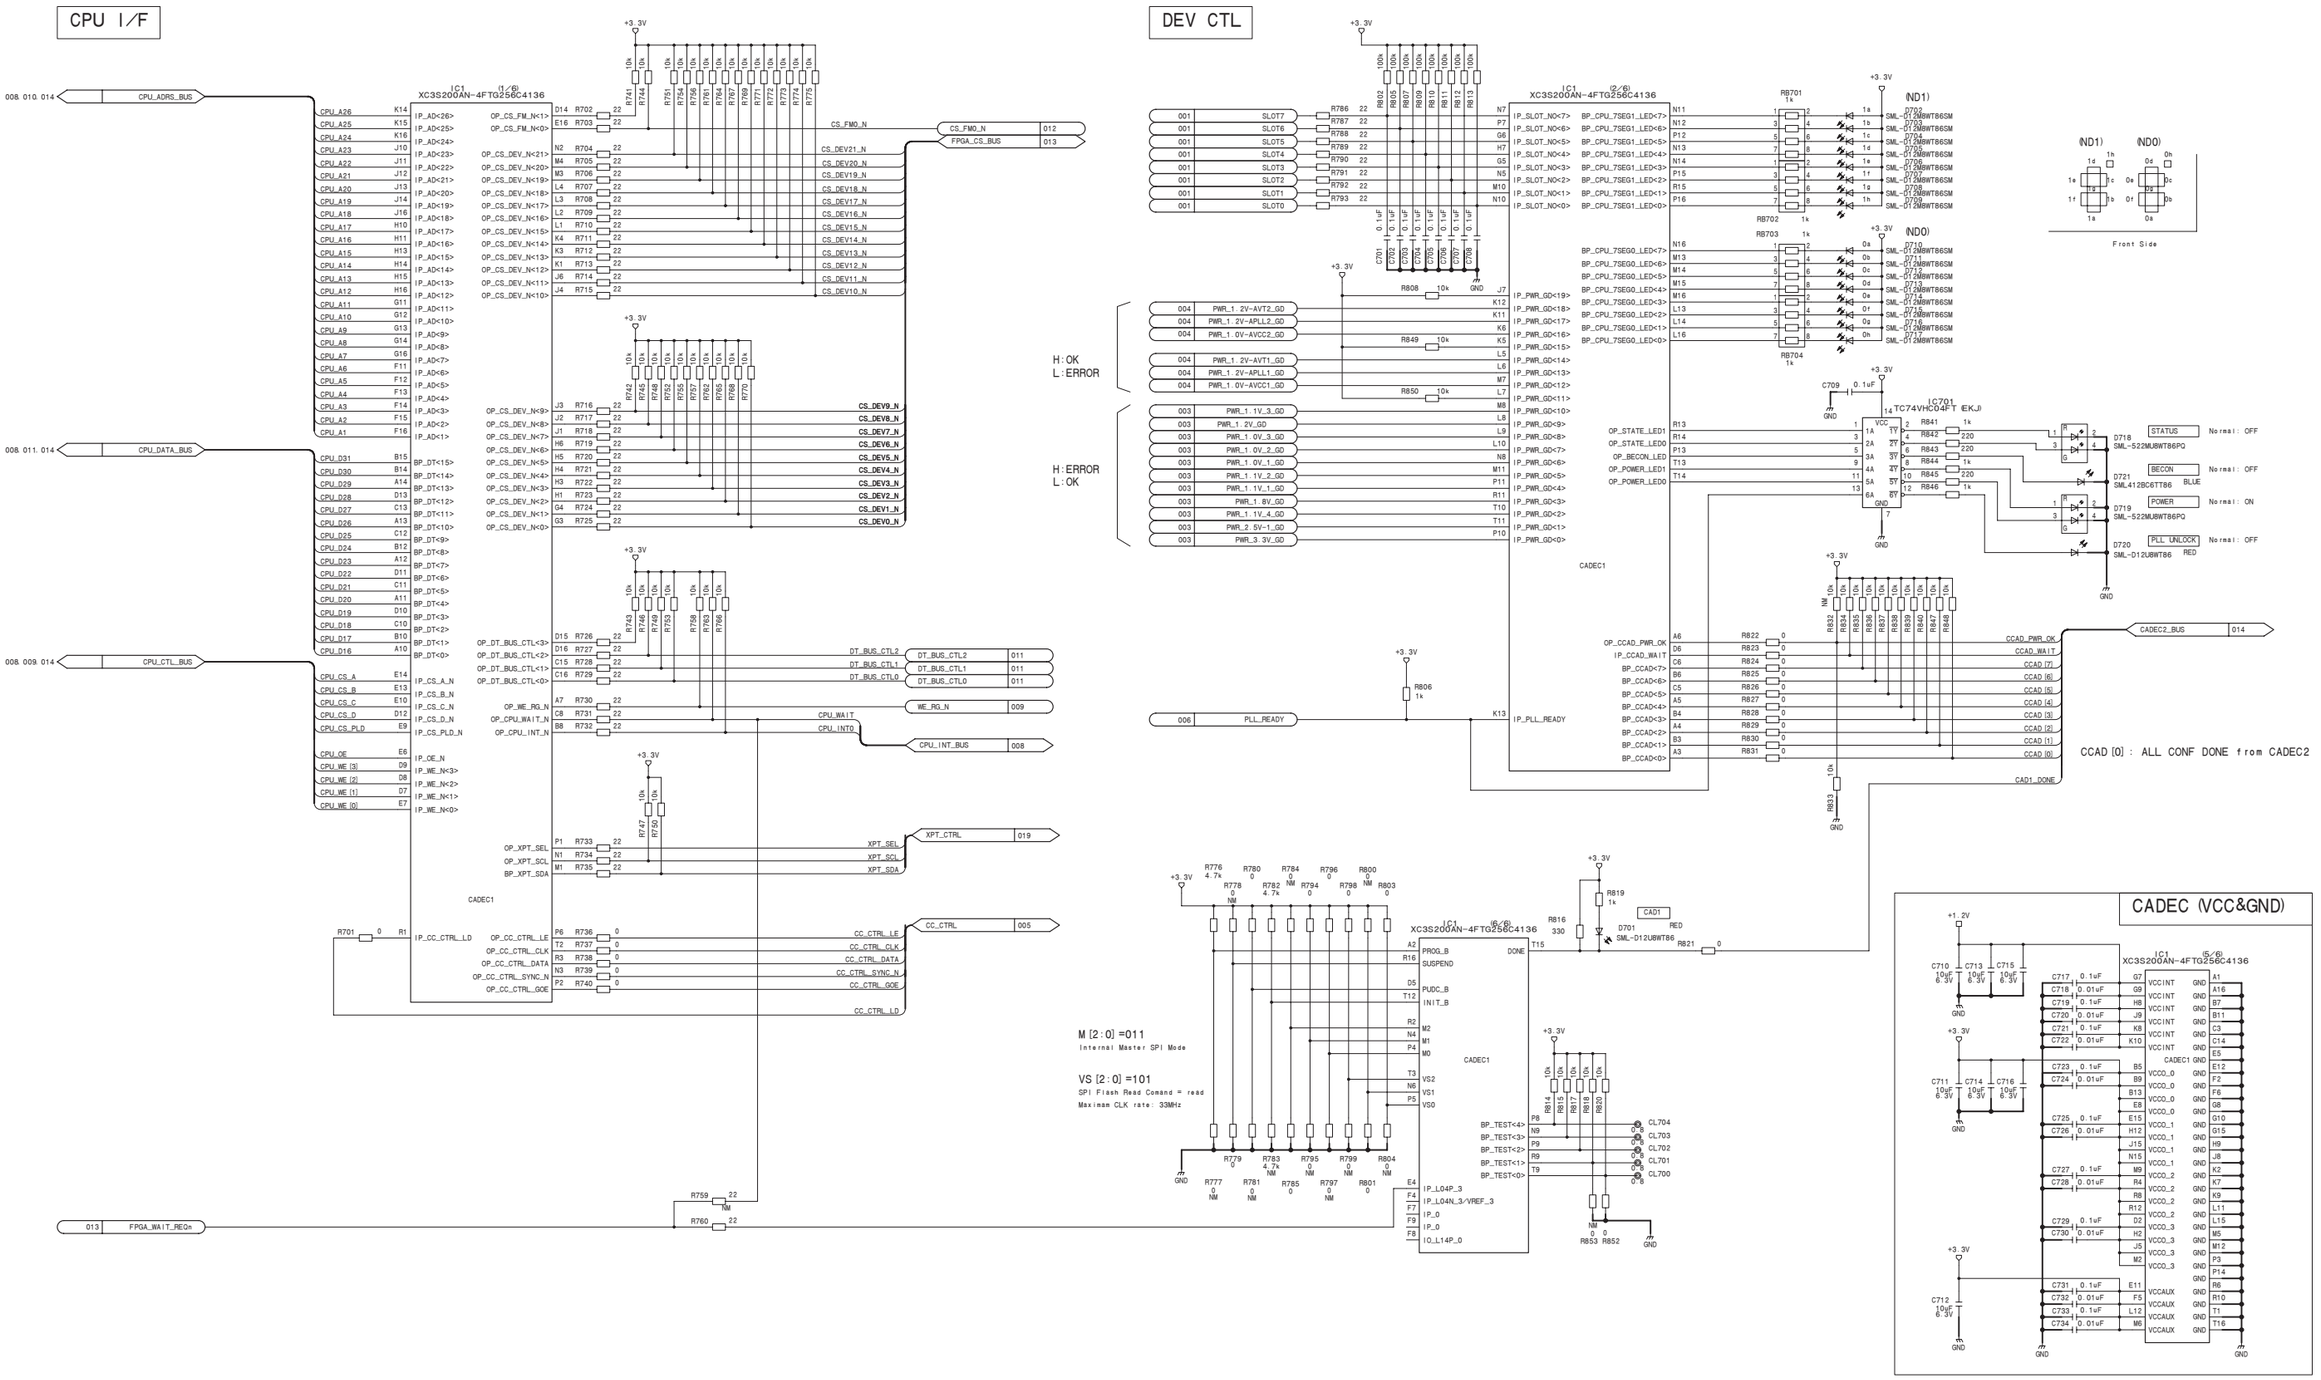

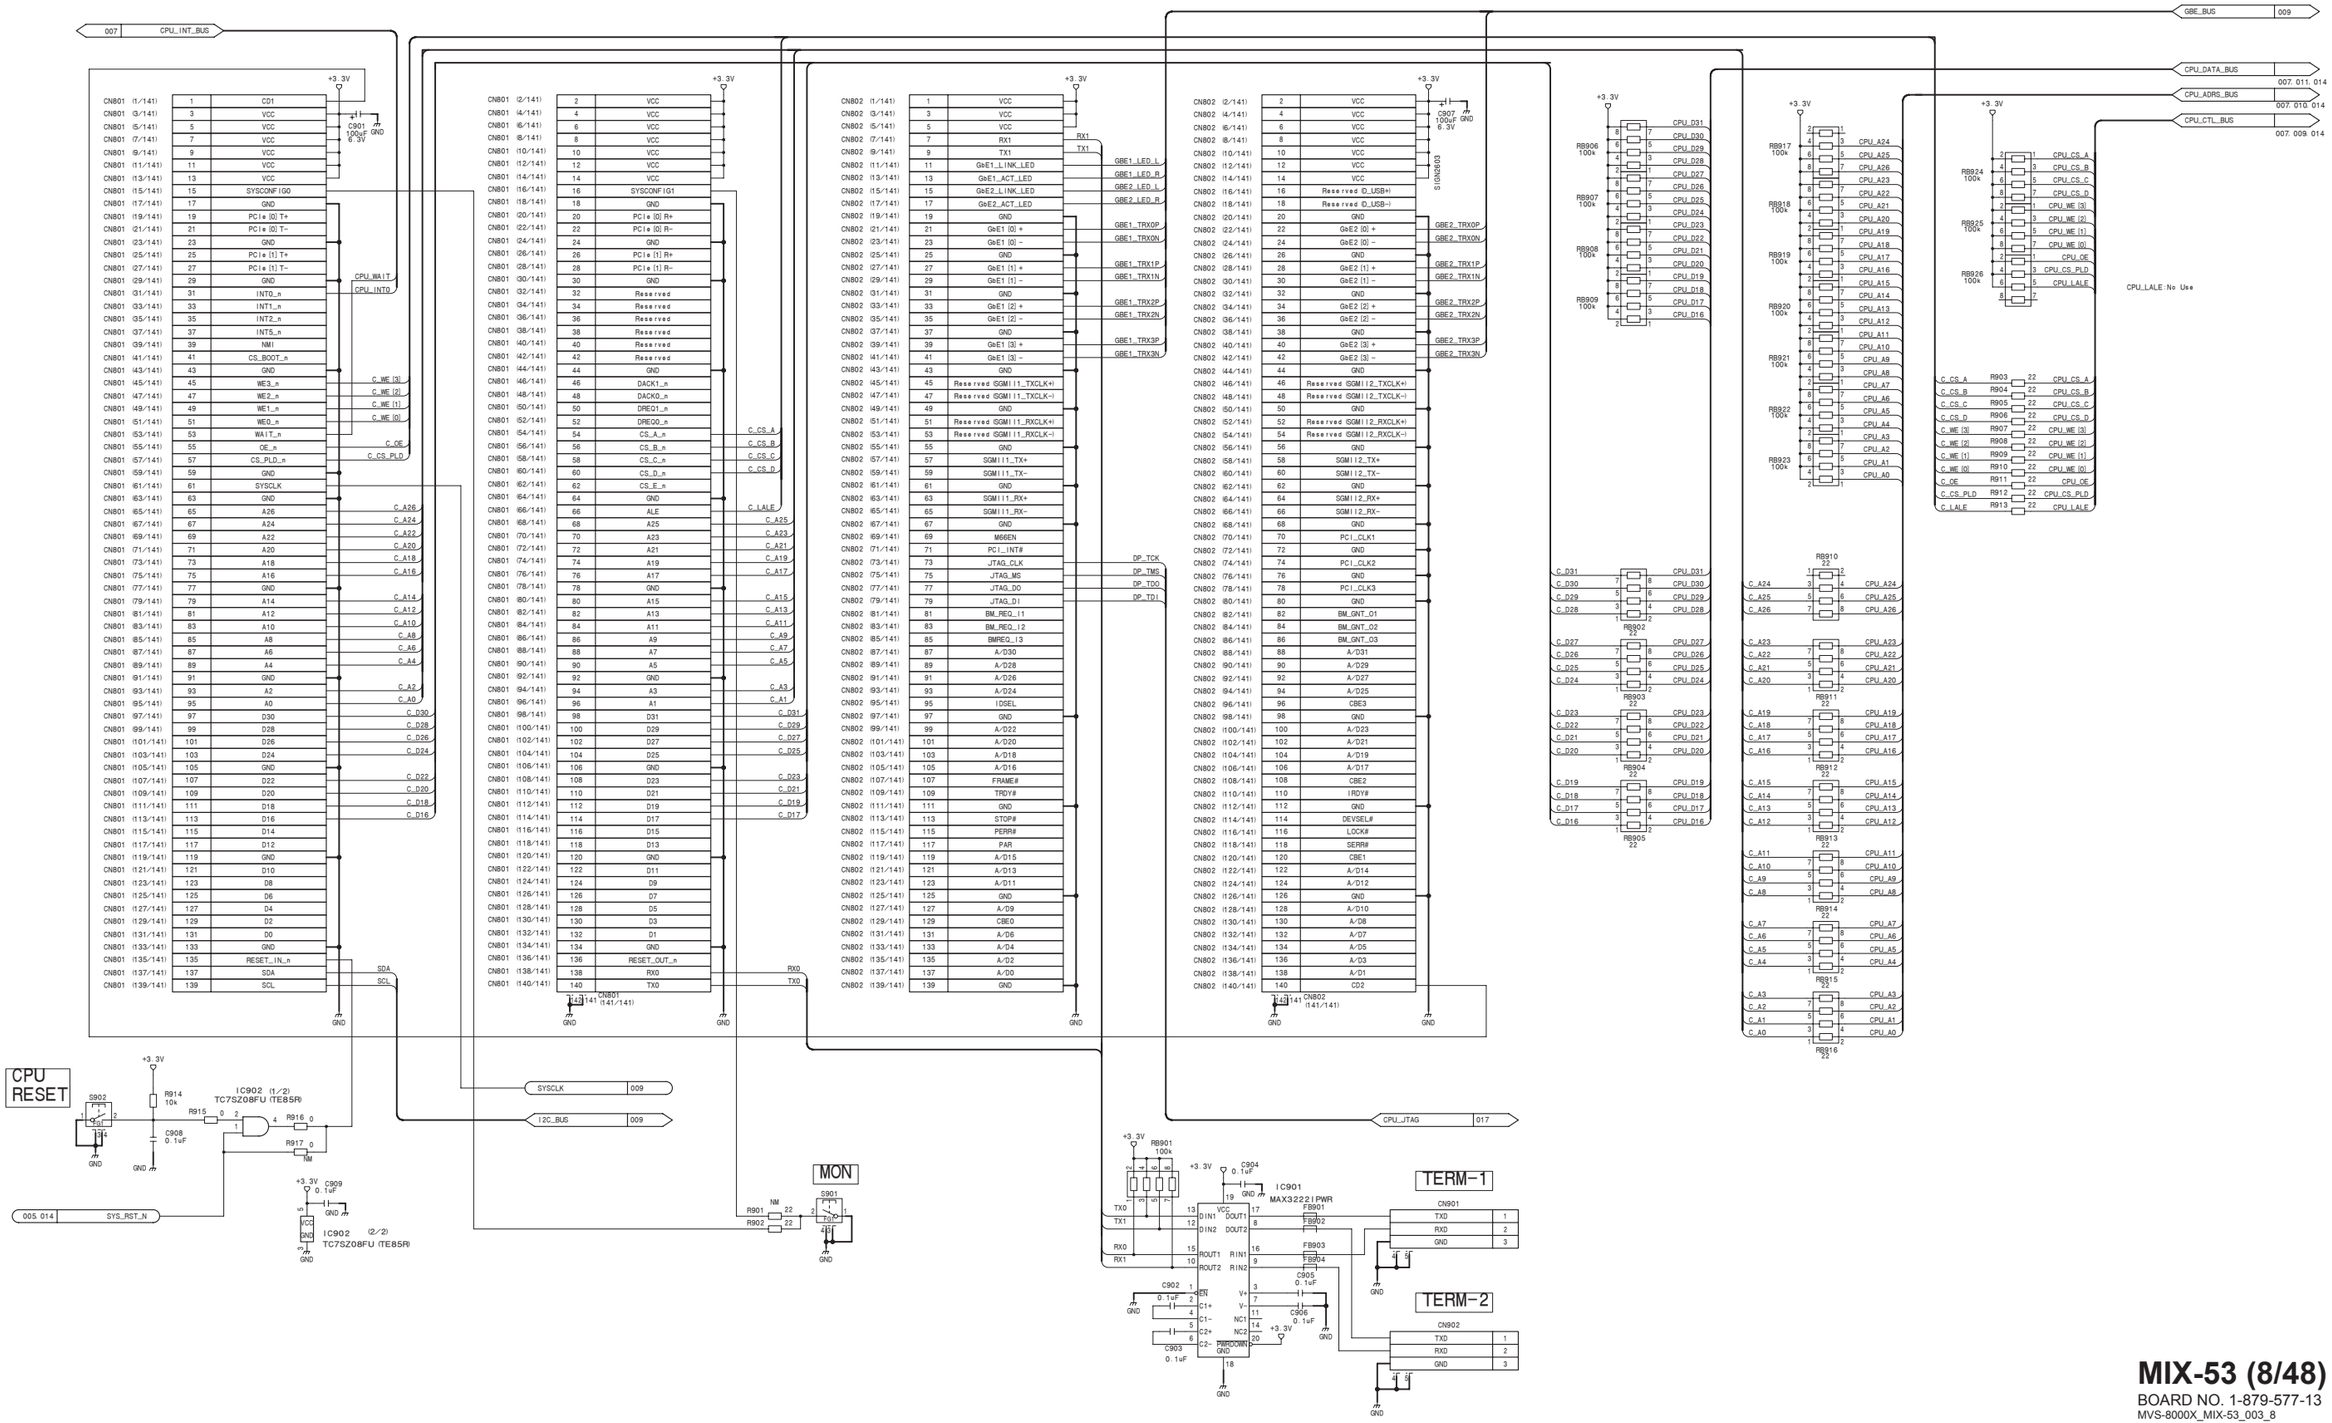

MIX-53 (8/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_8

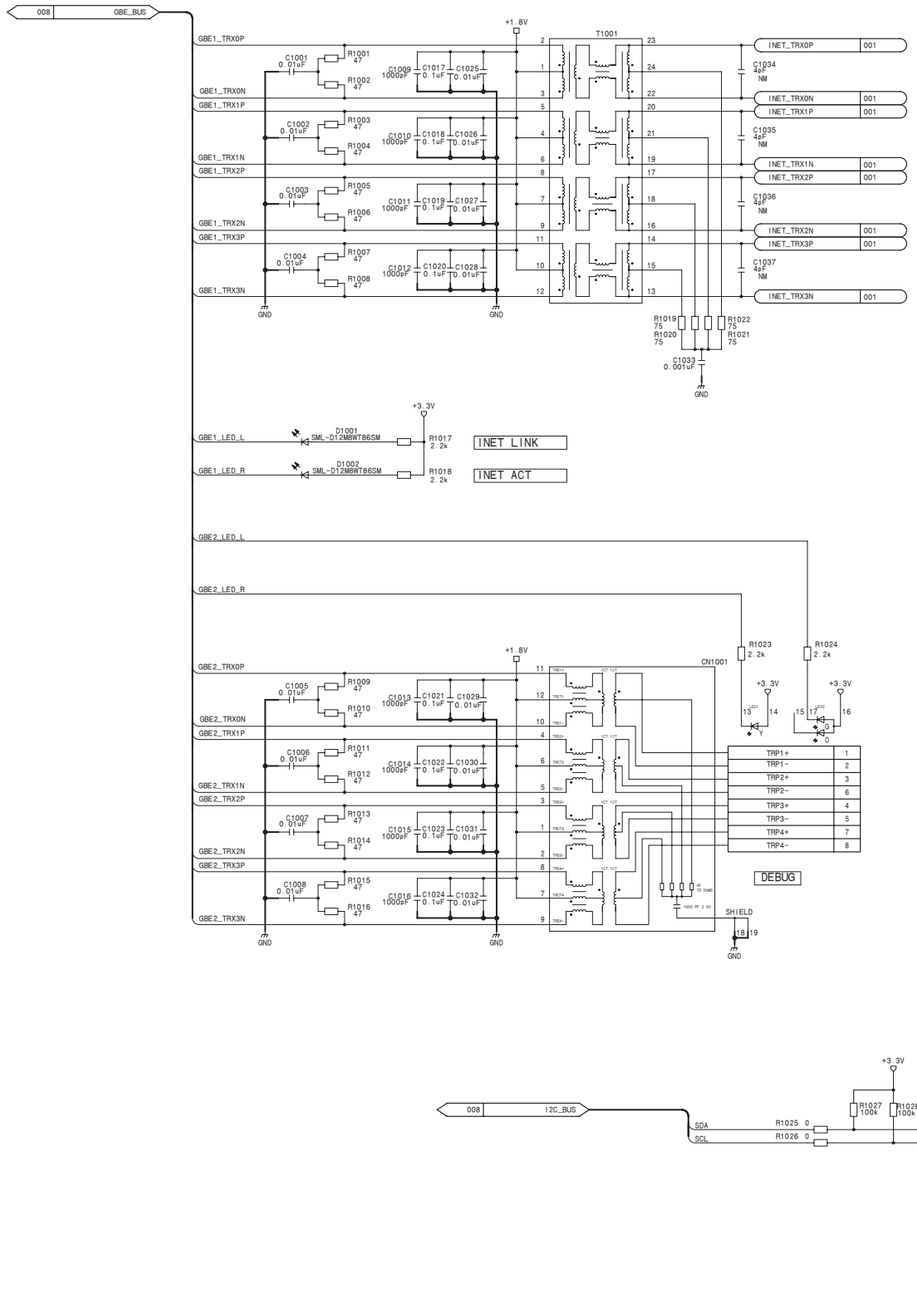

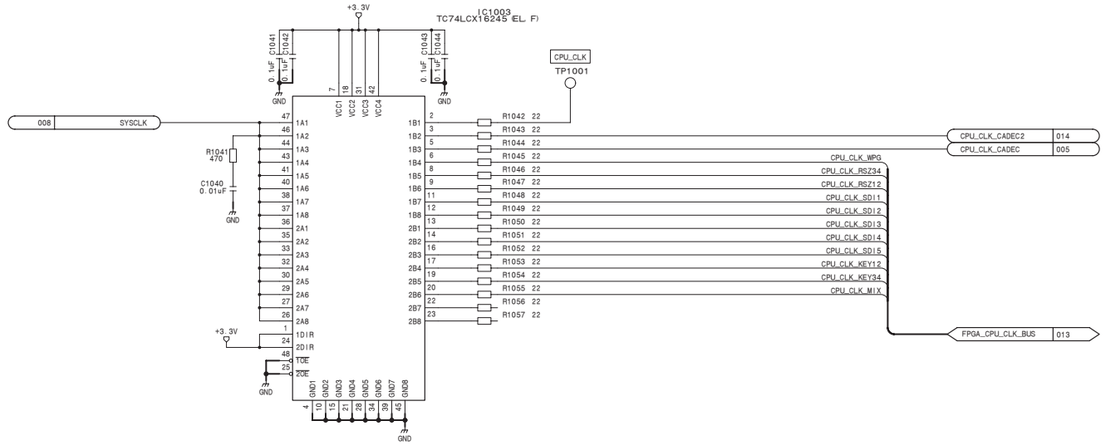

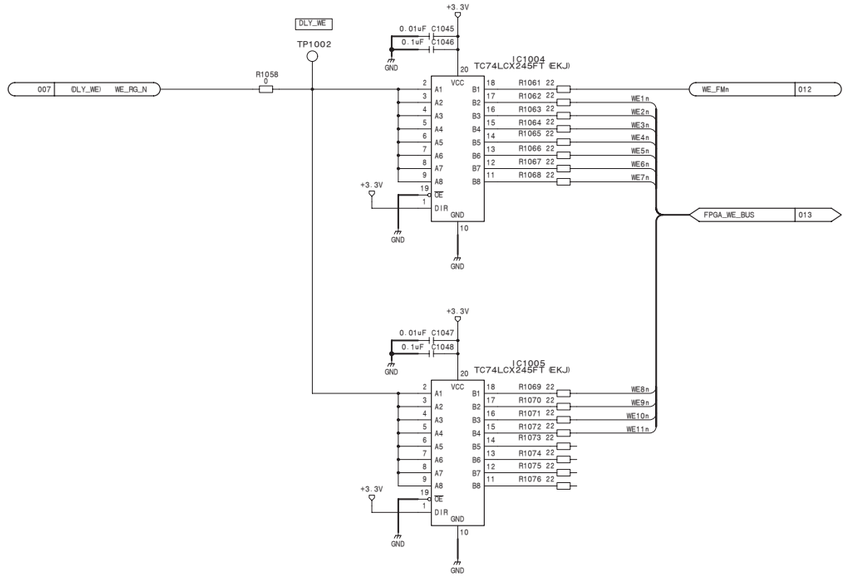

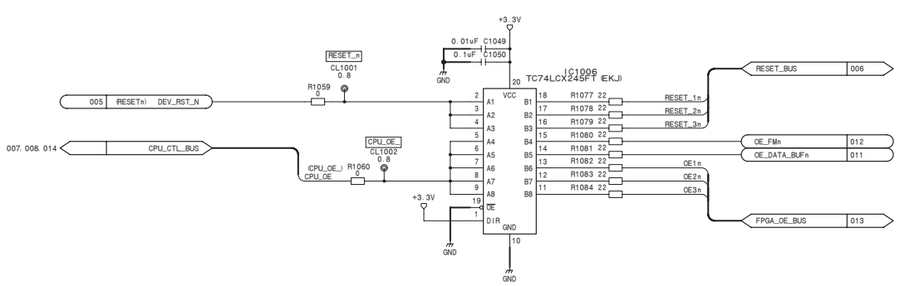

MIX-53 (9/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_9

MIX-53 (10/48) **SUFFIX: -13**

Fm: CPU Module

007. 008. 014 CPU_ADRS_BUS

014 CAD2_ADRS_BUS

Fm: CADEC2

CF_ADR_BUS 012

For: CONFIG Flash

ADR2_BUS 013

For: FPGA (Others)

F_ADR_BUS 012

For: Appli Flash

ADR1_BUS 013

For: FPGA (MFSDI)

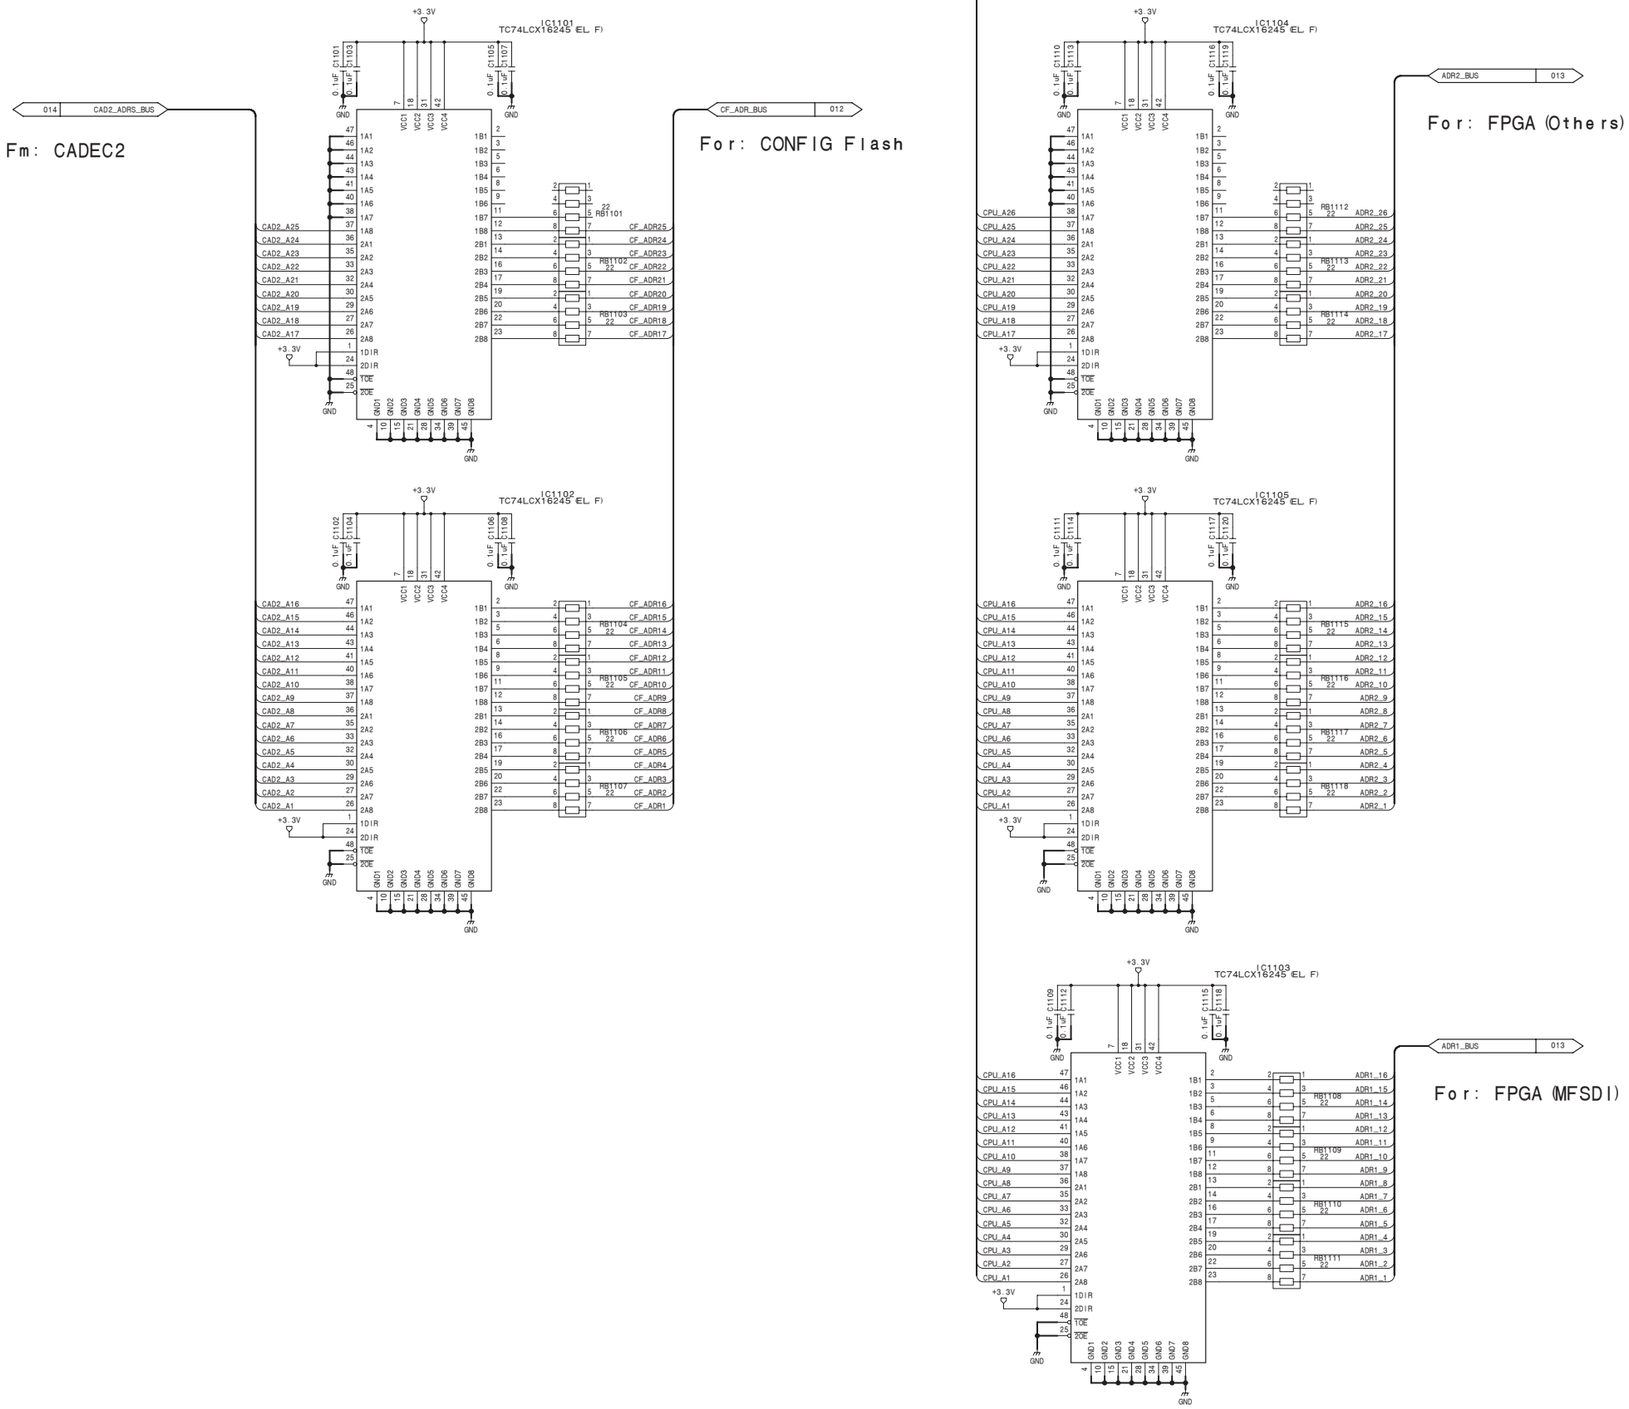

4-196

MIX-53 (10/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_10

MIX-53 (11/48)
SUFFIX: -13

Fm: CPU Module

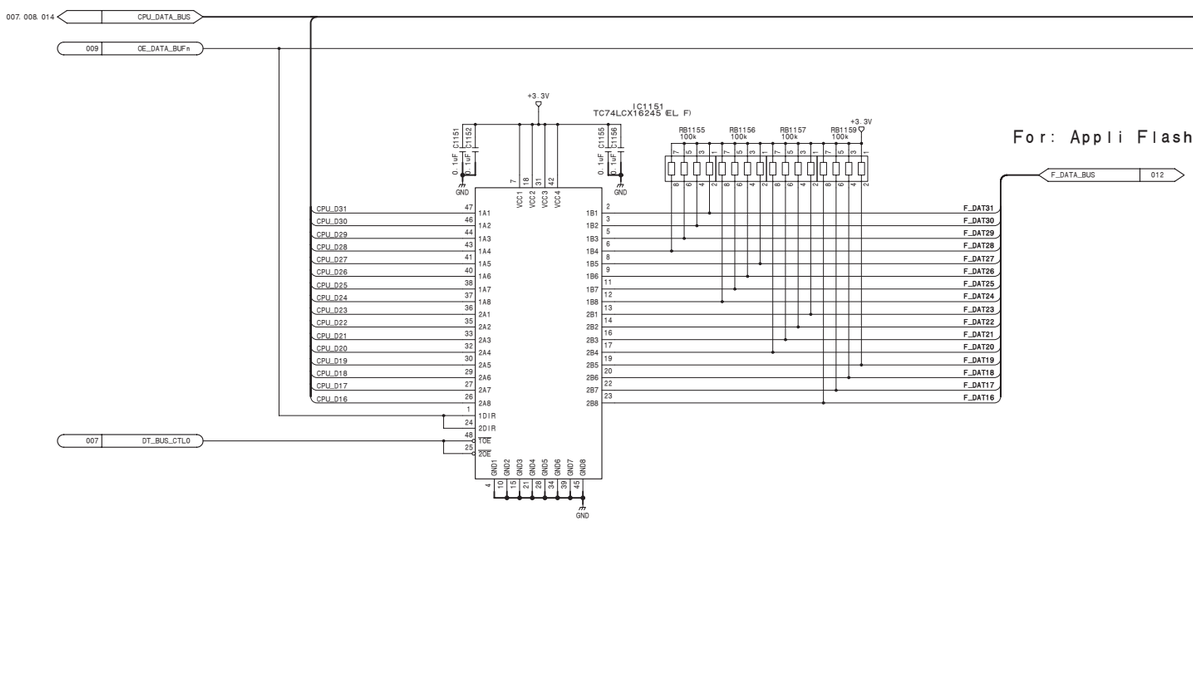

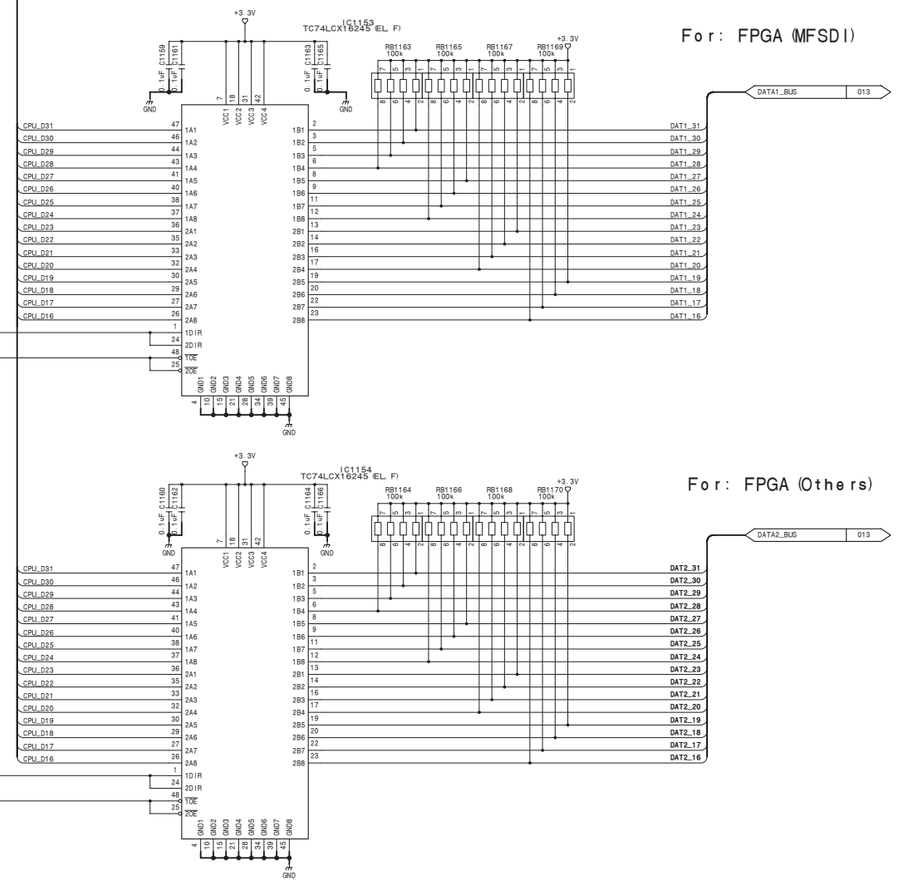

Fm: CADEC2

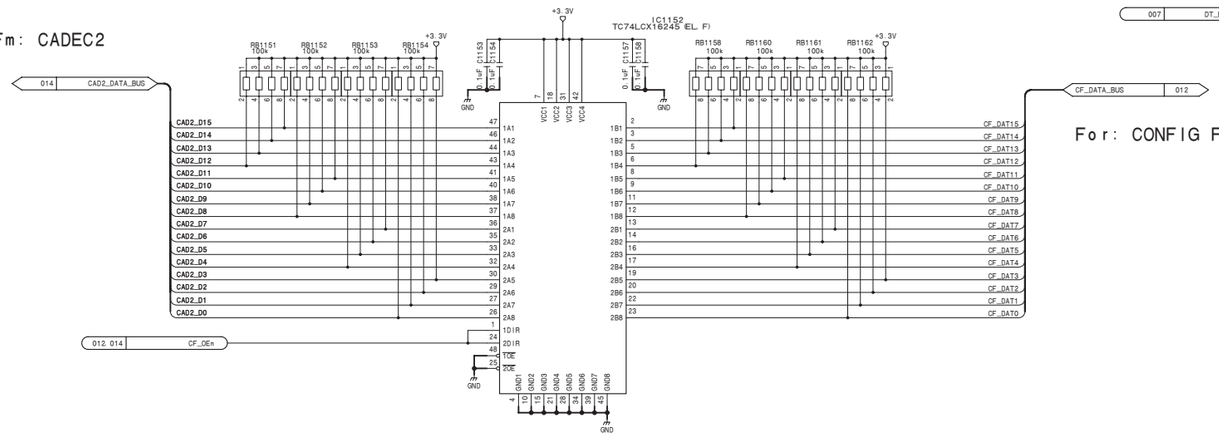

MIX-53 (11/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_11

MIX-53 (12/48)
SUFFIX: -13

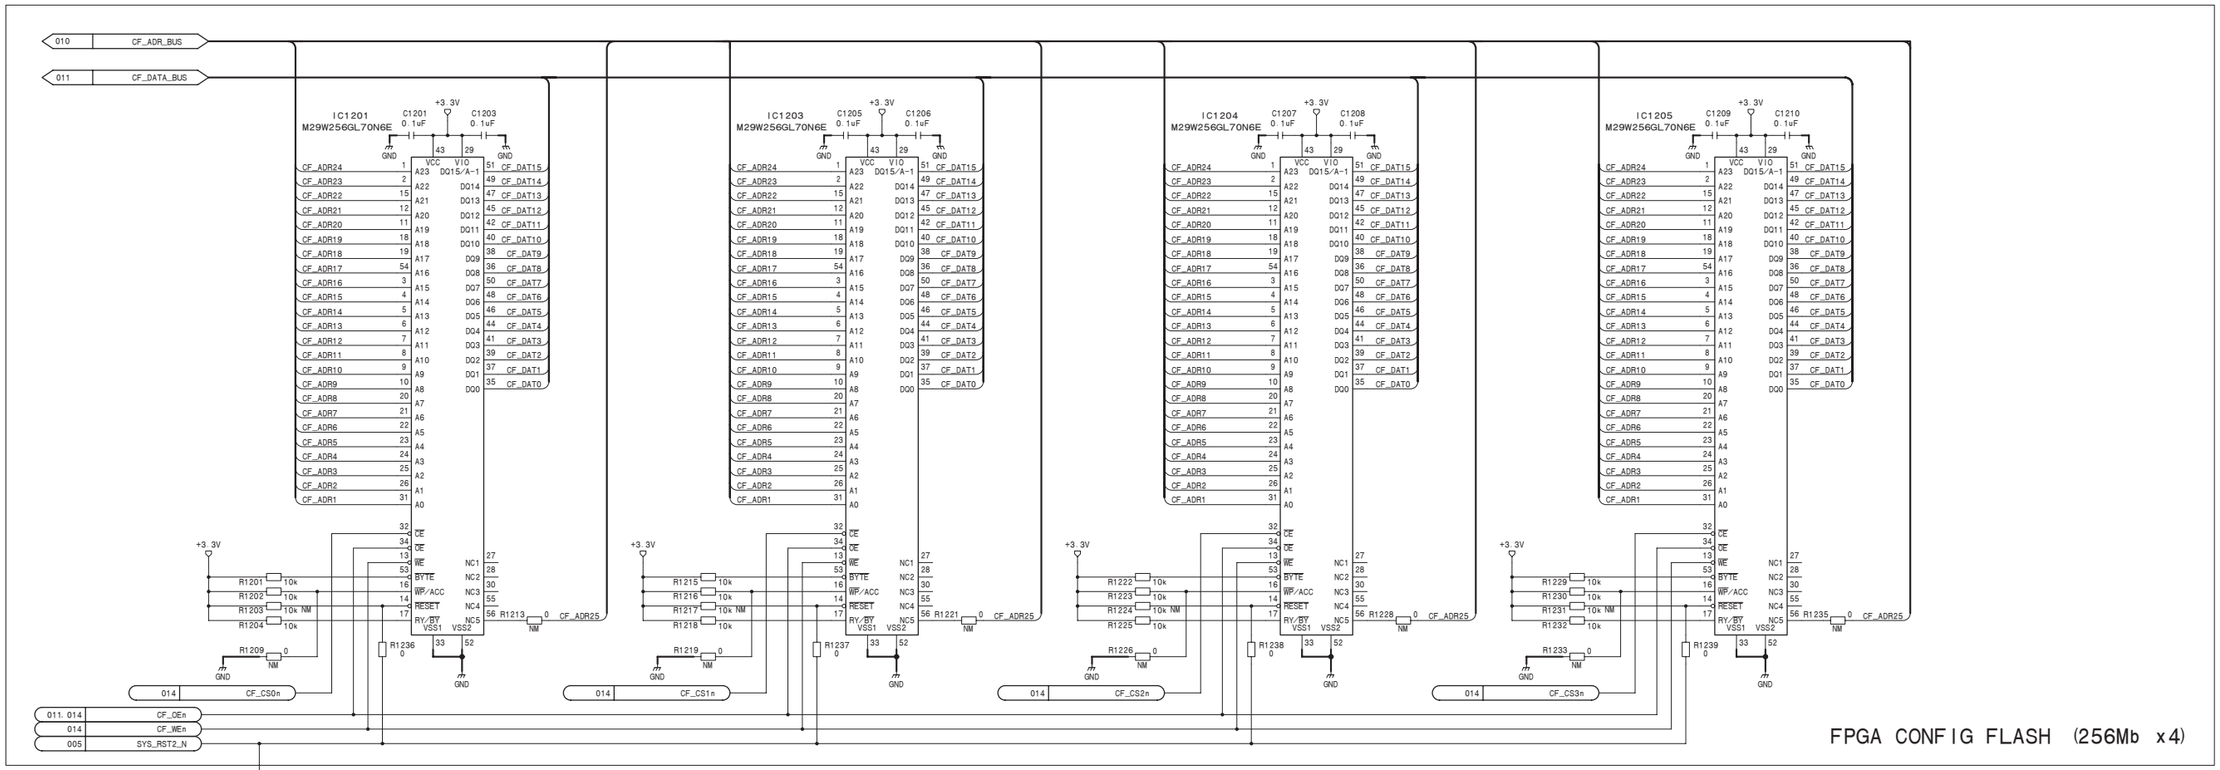

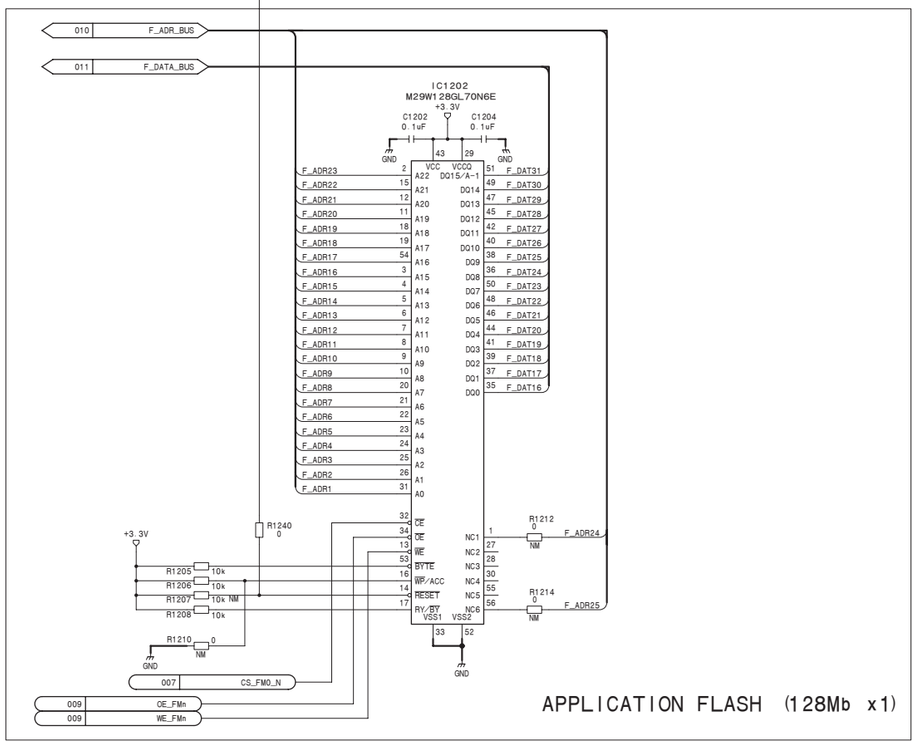

MIX-53 (12/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_12

MIX-53 (13/48)
SUFFIX: -13

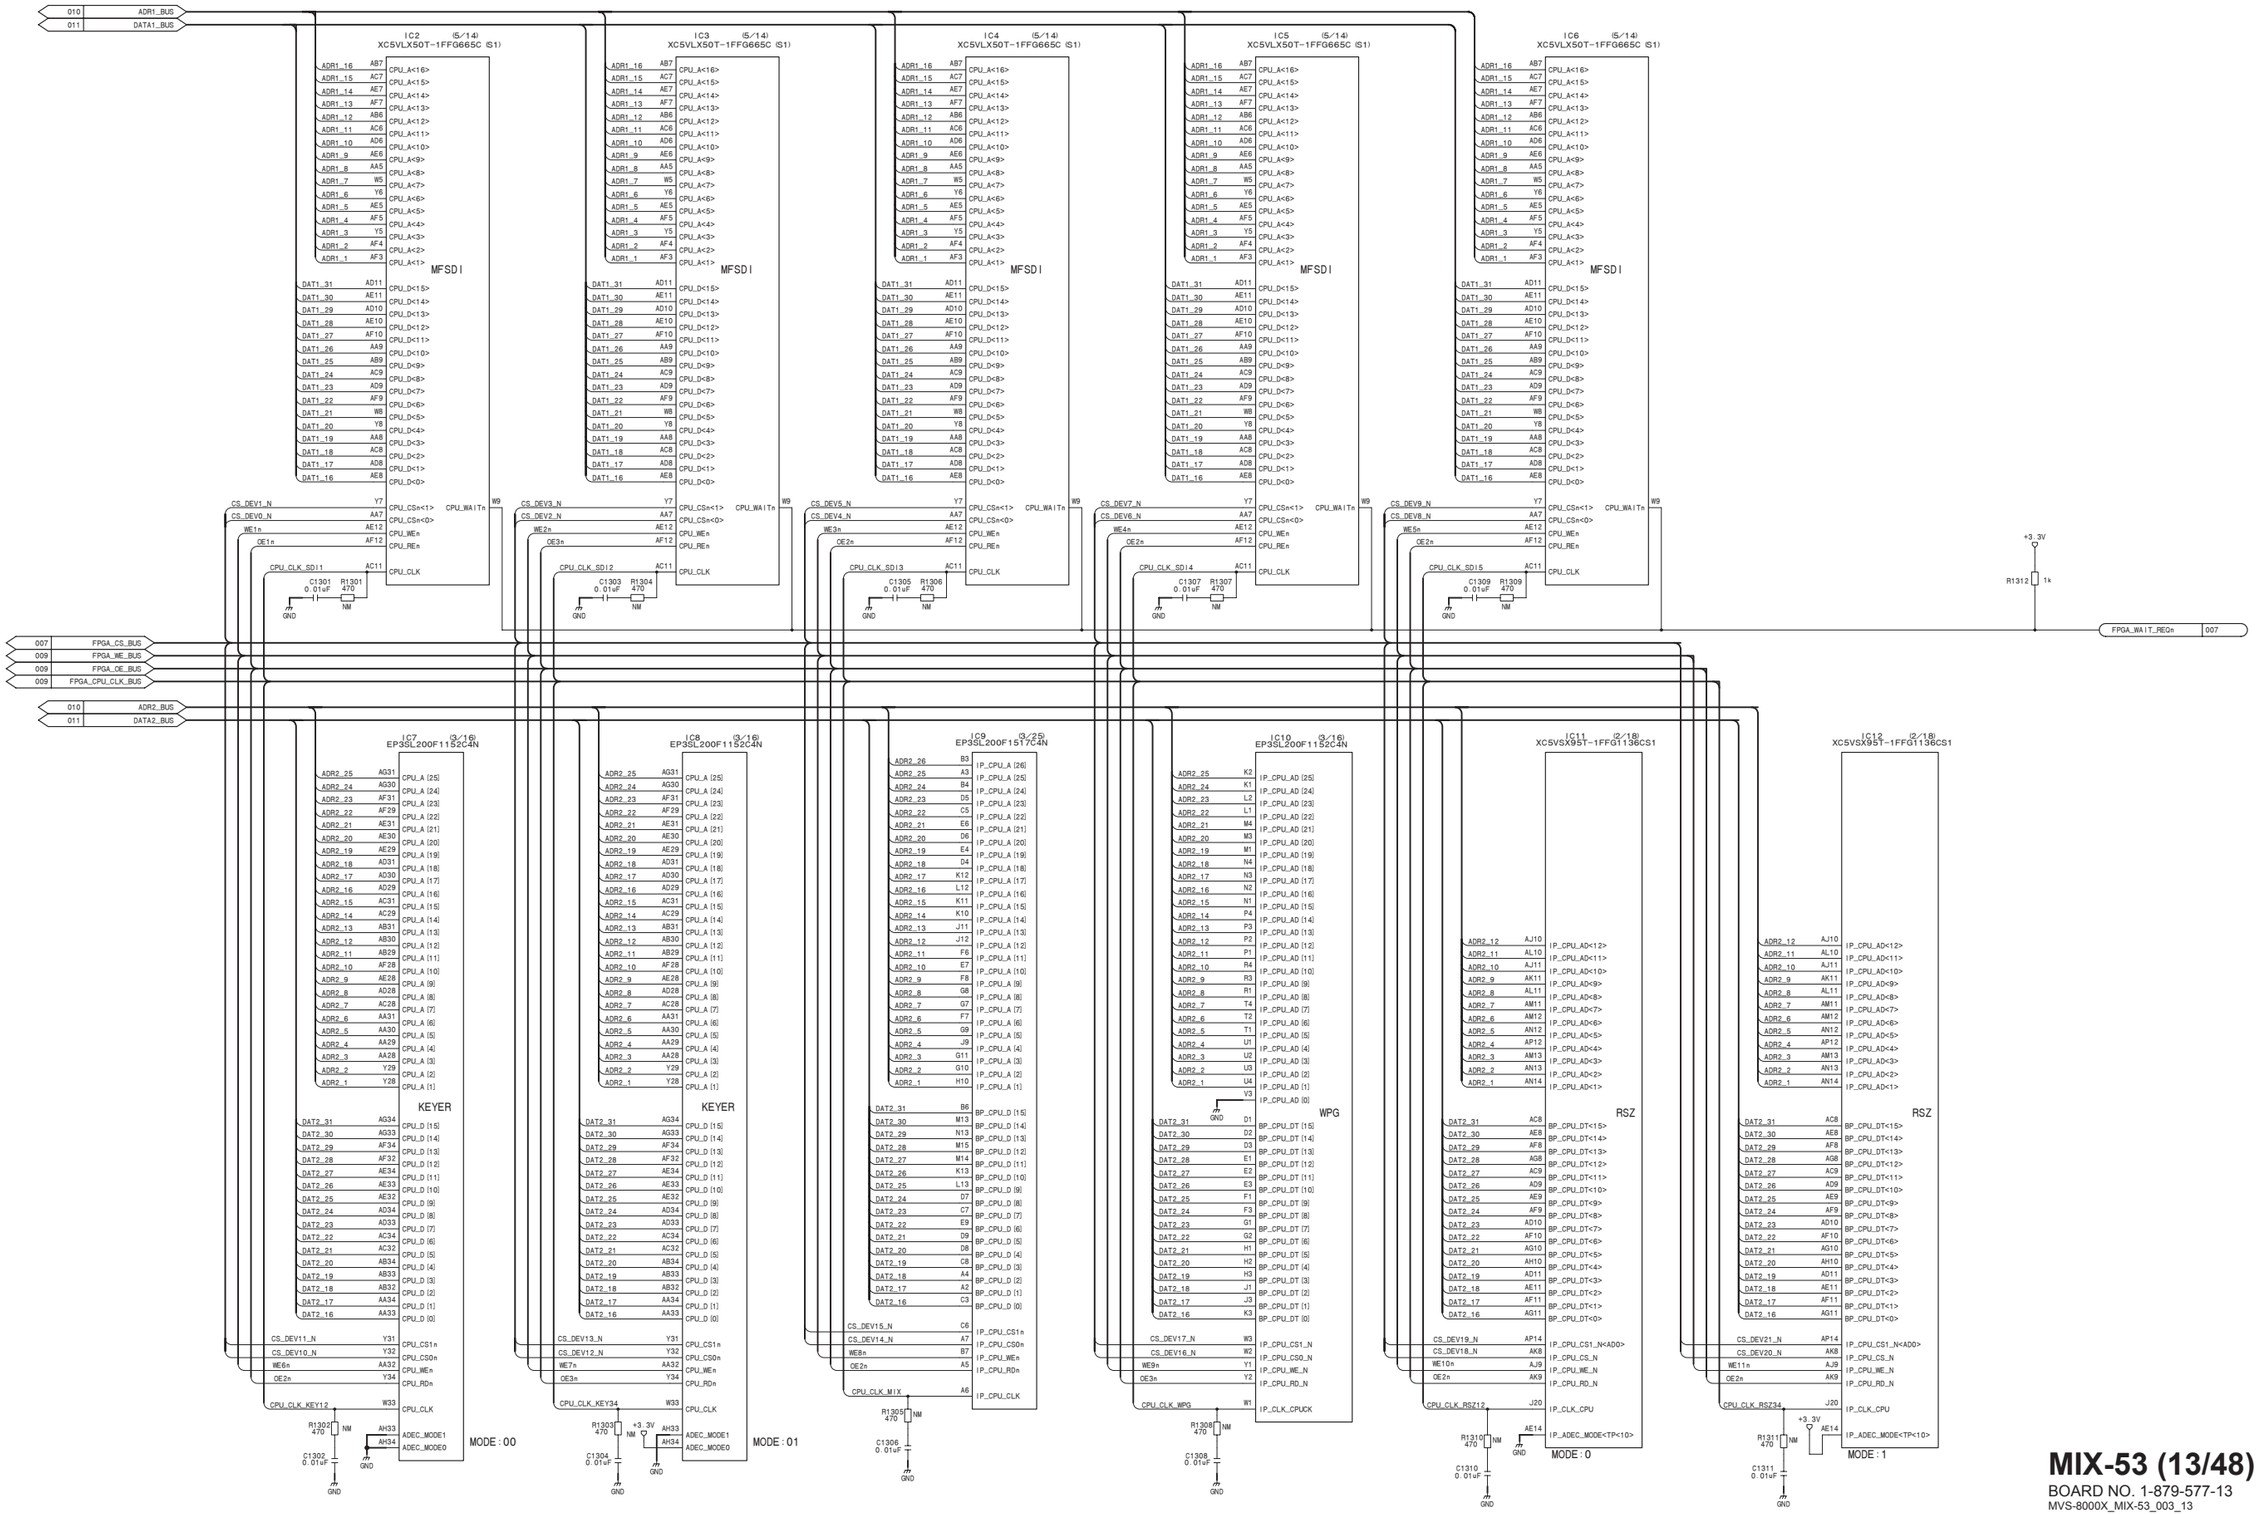

MIX-53 (13/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_13

CPU I/F

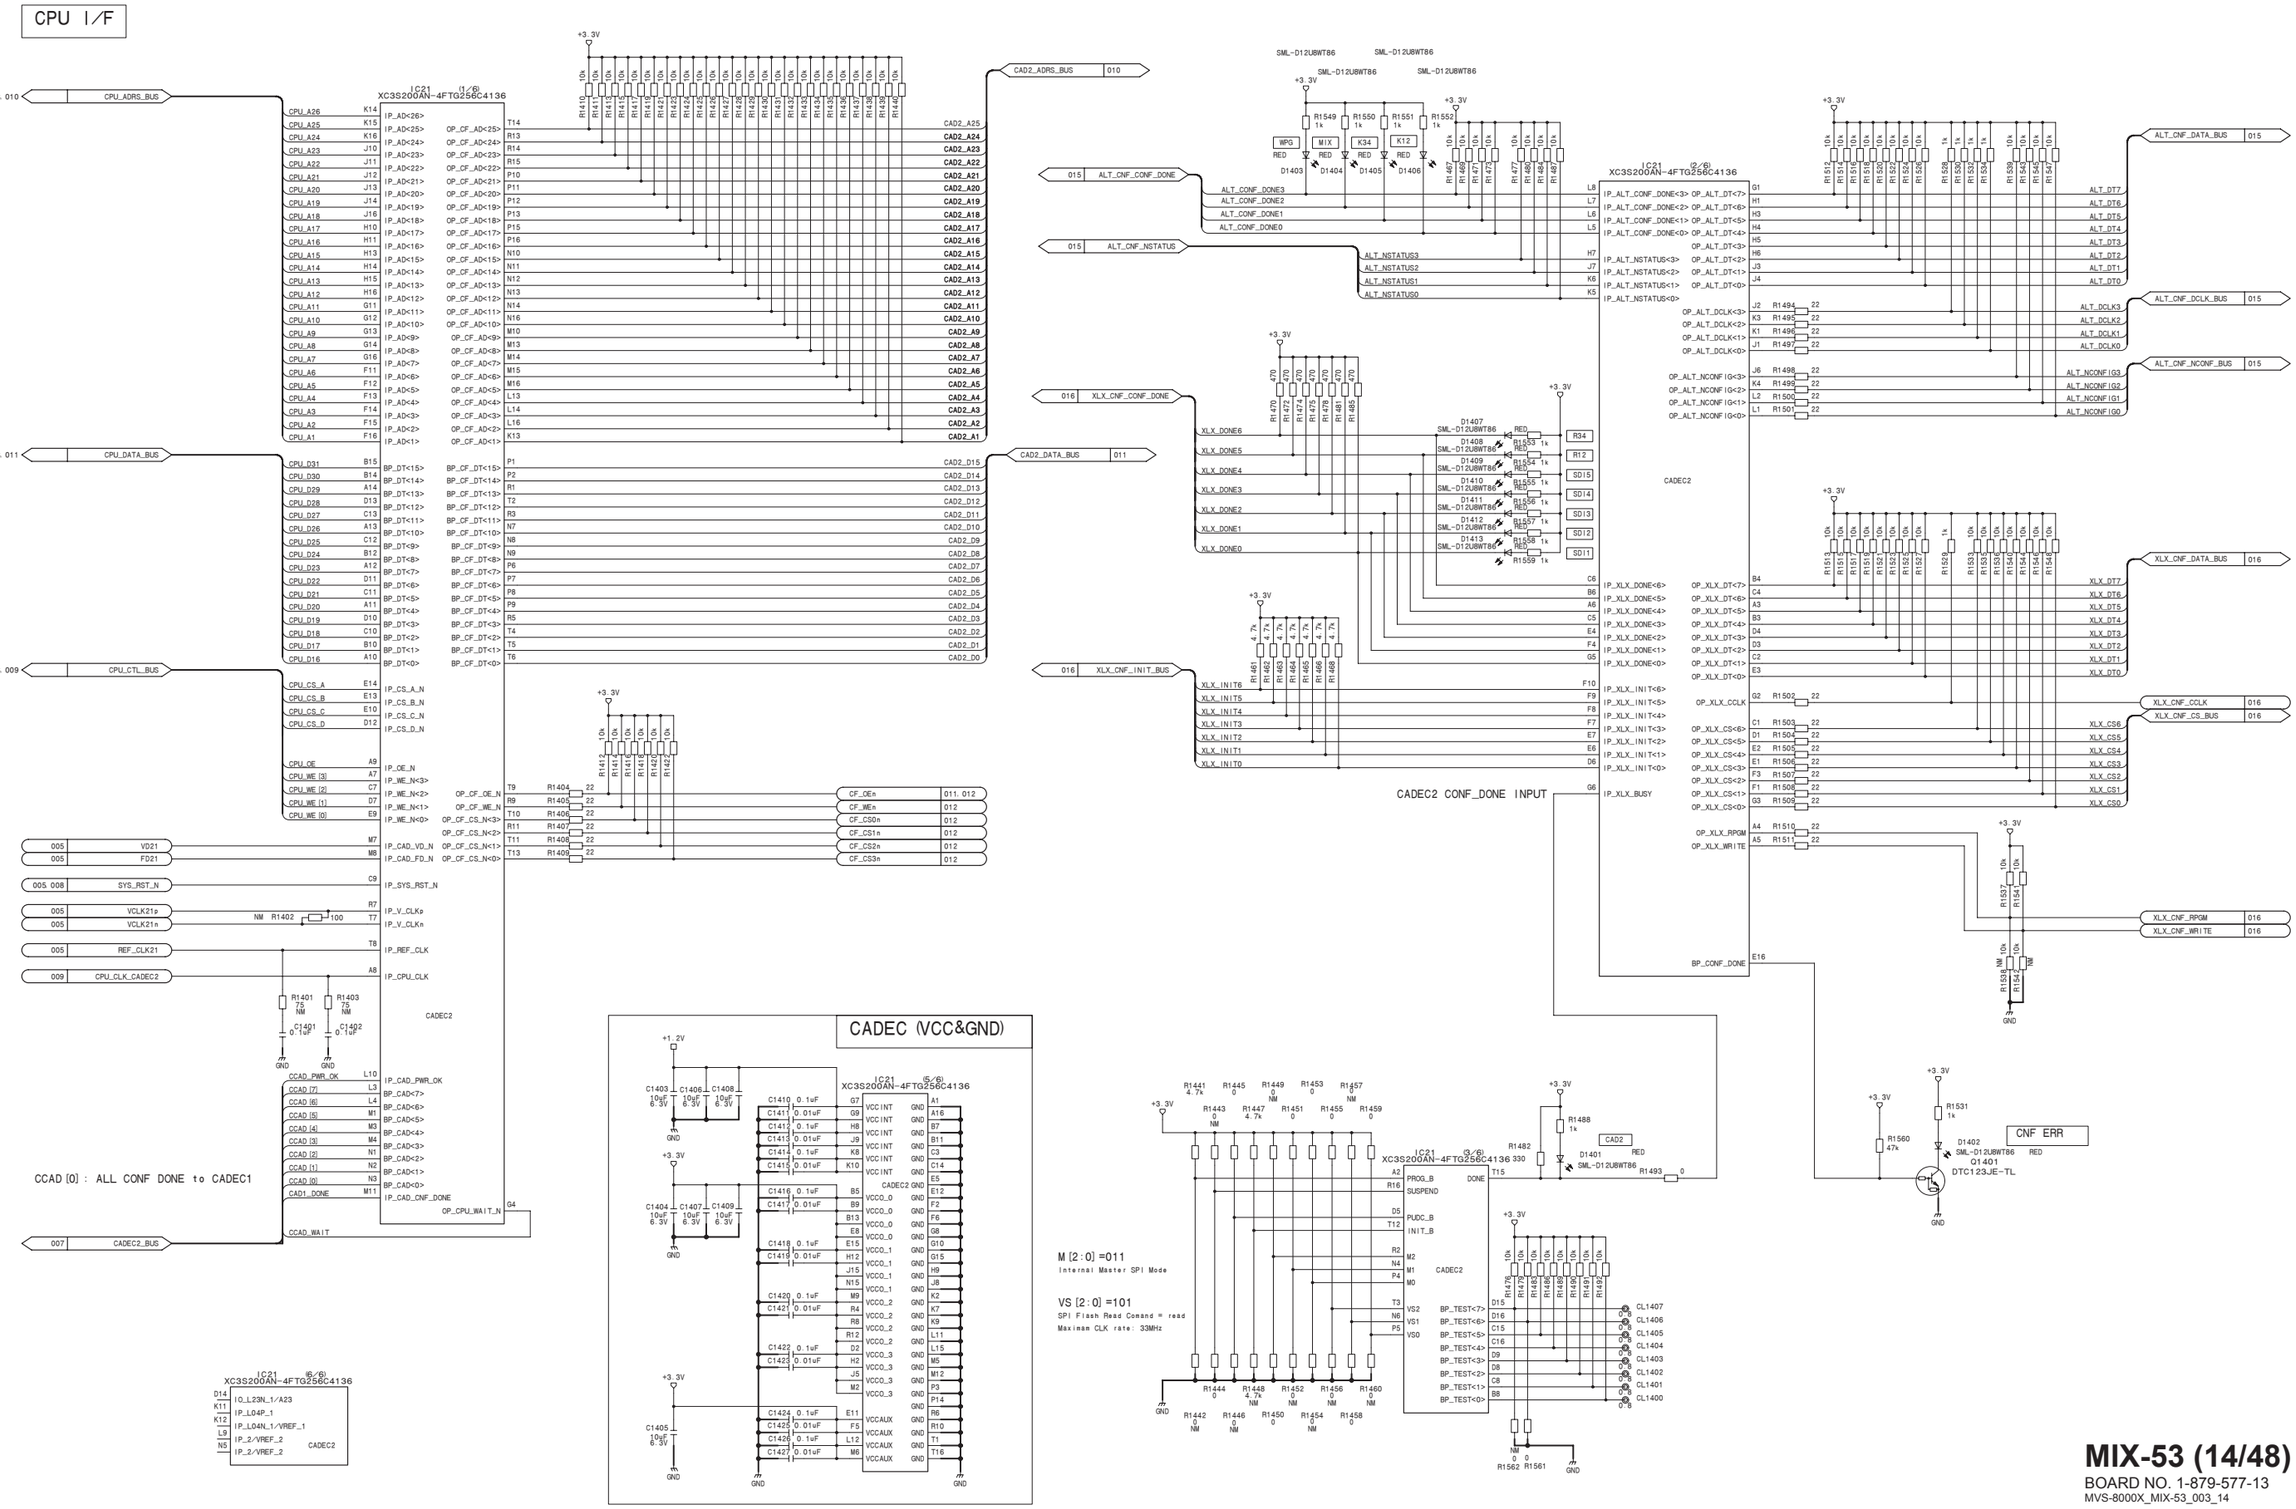

MIX-53 (14/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_14

MIX-53 (15/48)
SUFFIX: -13

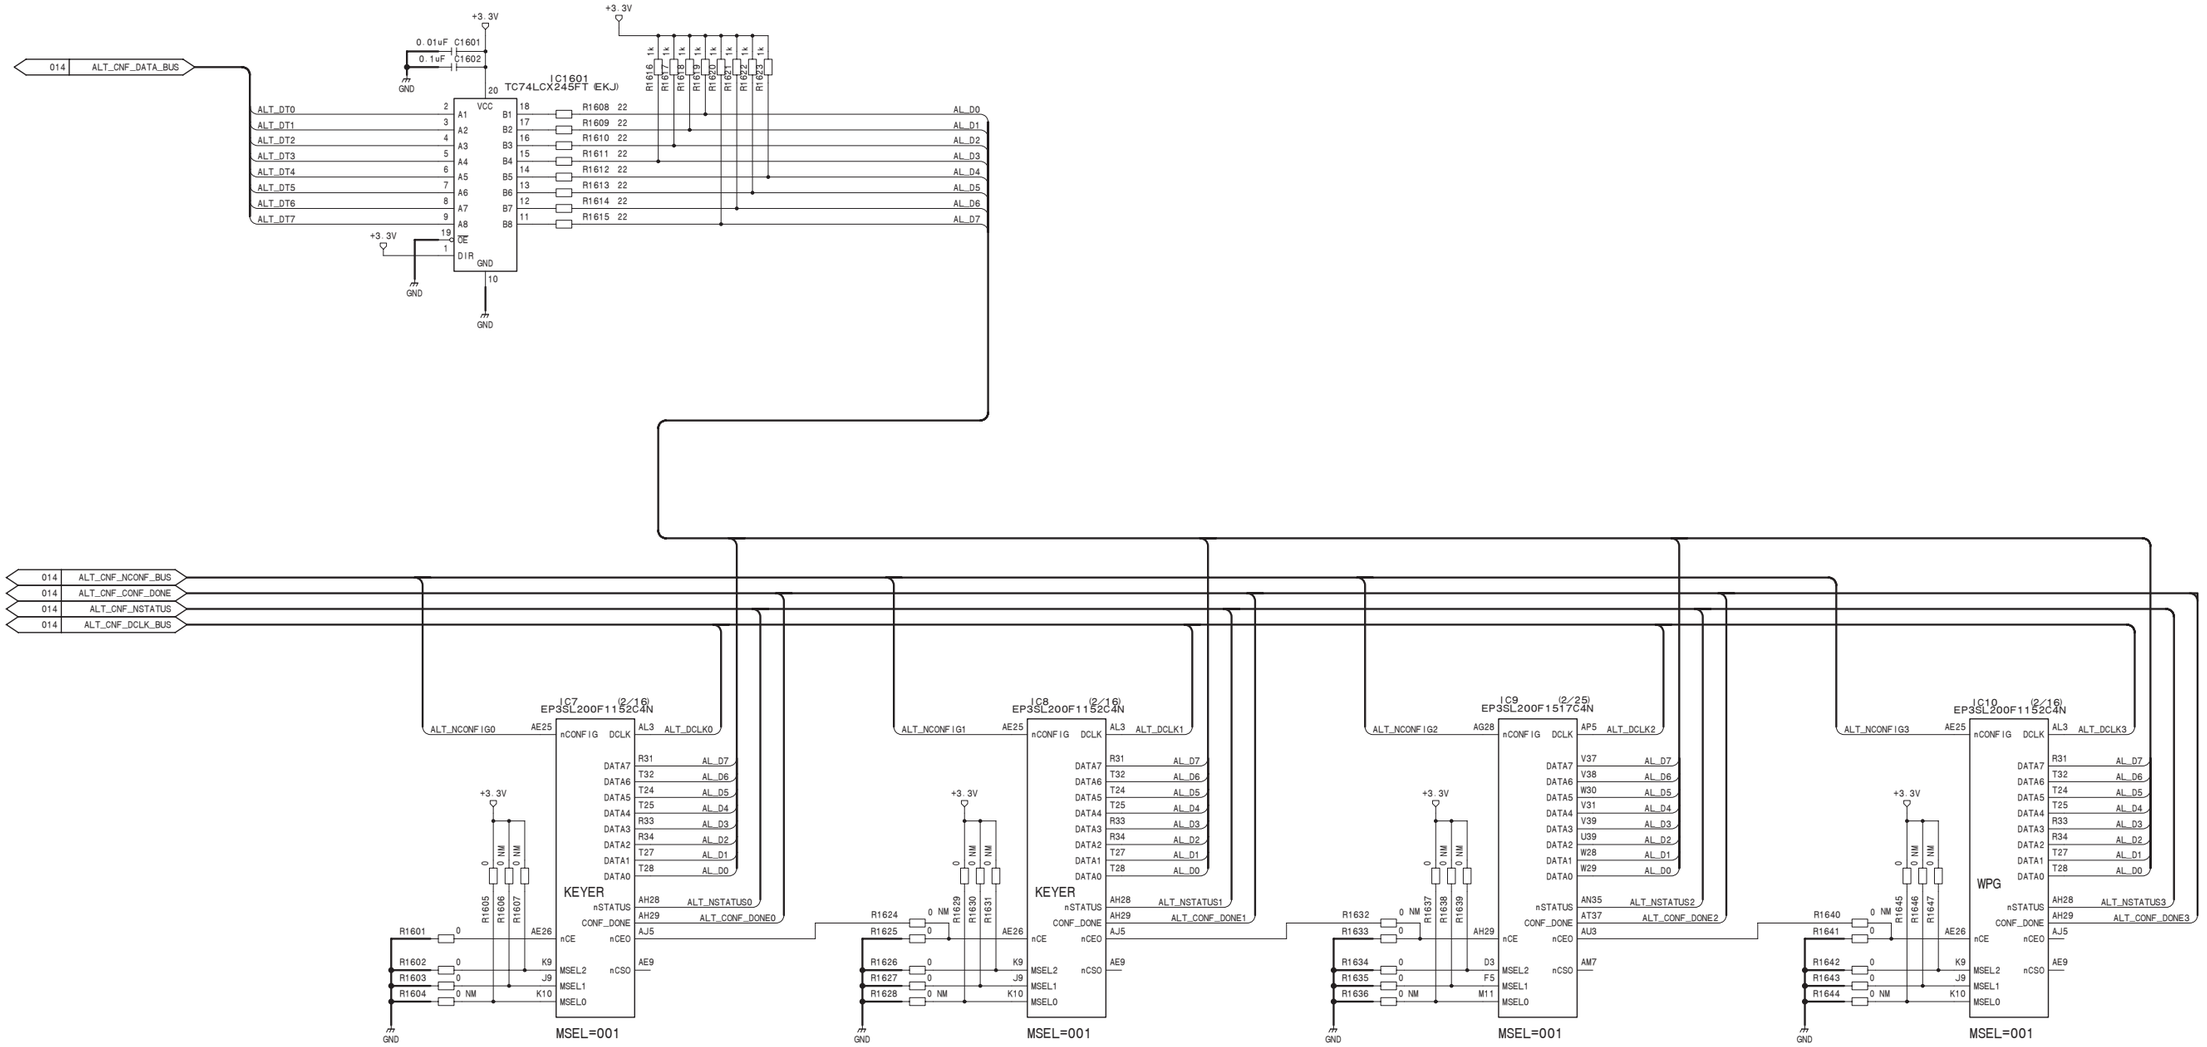

MIX-53 (15/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_15

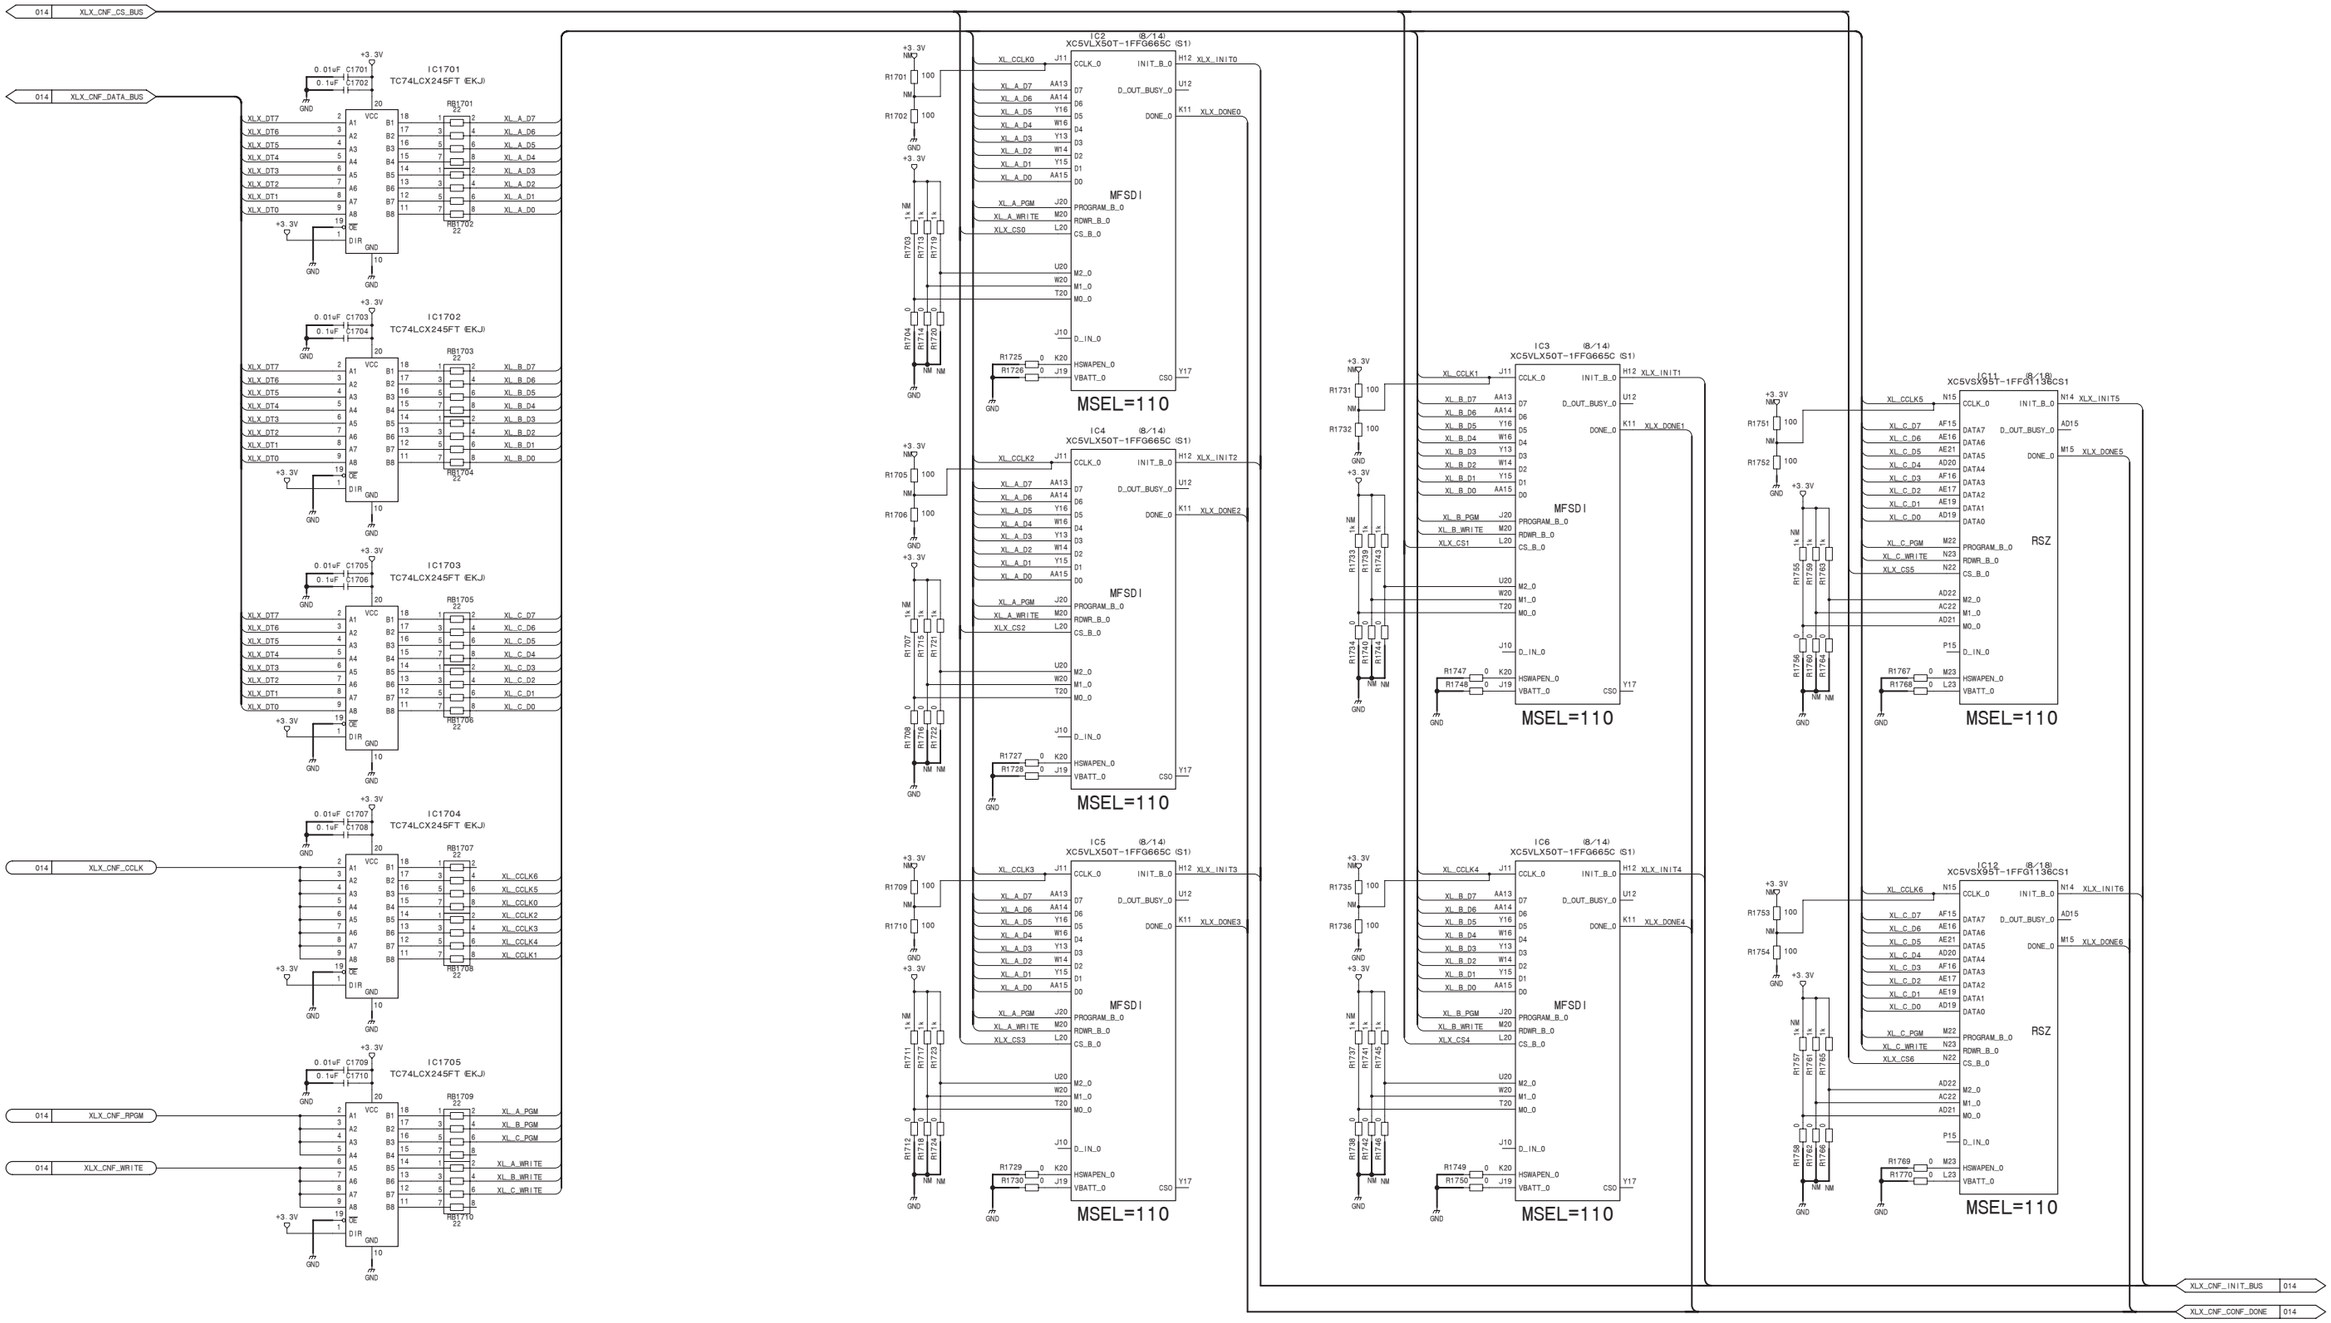

MIX-53 (16/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_16

MIX-53 (17/48)
SUFFIX: -13

JTAG_CHAIN \ Ref	R1845	R1842	R1848	R1849	R1852	R1853	R1854
DEFAULT	0	X	X	0	X	0	X
CADEC1, 2	0	X	X	X	0	X	0
FULL	X	0	0	0	X	0	X

(Note)
O: Mount
X: No mount

EPR2
Angle type
CN1801
VCC
TRST/DATAOUT
TDI/ASDI
TDO/C_D
TMS/nCONF
TCK/DCLK
MODE
GND
nCE
nCS

IC1801 IC1802 IC1803 TC74LCX245FT (EKJ)

IC1 (4/6) XC3S200AN-4FTG256C4136 CADEC1
IC21 (4/6) XC3S200AN-4FTG256C4136 CADEC2
IC12 (14/18) XC5VSX95T-1FFG1136CS1 RSZ34
CPU Module
CPU_JTAG 008

IC10 (1/16) EP3SL200F1152C4N WPG
IC3 (7/14) XC5VLX50T-1FFG665C (S1) MFSDI_IC3
IC6 (7/14) XC5VLX50T-1FFG665C (S1) MFSDI_IC6
IC8 (1/16) EP3SL200F1152C4N KEYER34
IC9 (1/25) EP3SL200F151764N MIXER

IC5 (7/14) XC5VLX50T-1FFG665C (S1) MFSDI_IC5
IC4 (7/14) XC5VLX50T-1FFG665C (S1) MFSDI_IC4
IC2 (7/14) XC5VLX50T-1FFG665C (S1) MFSDI_IC2
IC7 (1/16) EP3SL200F1152C4N KEYER12
IC11 (14/18) XC5VSX95T-1FFG1136CS1 RSZ12

1: CADEC1
2: CADEC2
3: RSZ12/34/CPU
4: KEYER34/WPG
5: SDI (IC3)
6: SDI (IC5) /SDI (IC6)
7: KEYER12/MIXER
8: SDI (IC2) /SDI (IC4)

TRST1
TRST2

MIX-53 (17/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_17

MIX-53 (18/48)
SUFFIX: -13

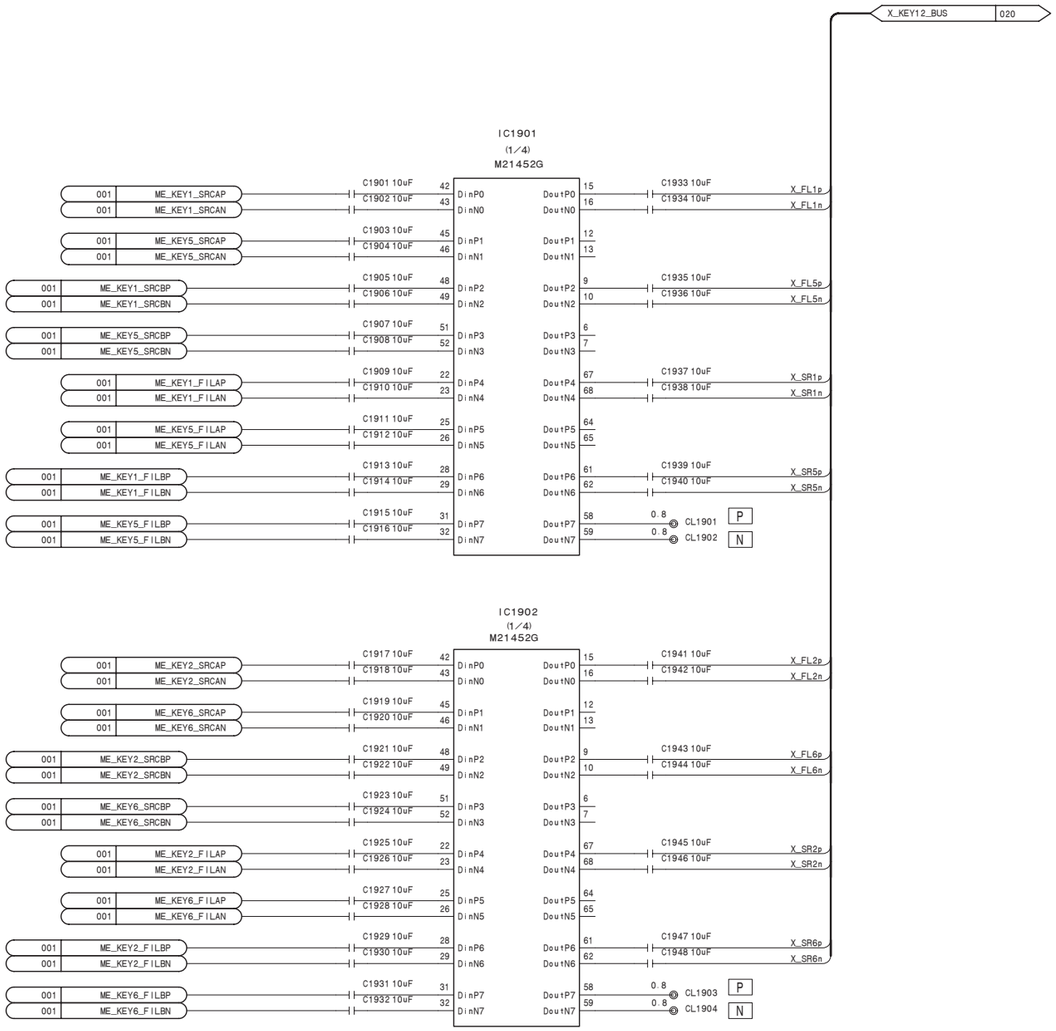

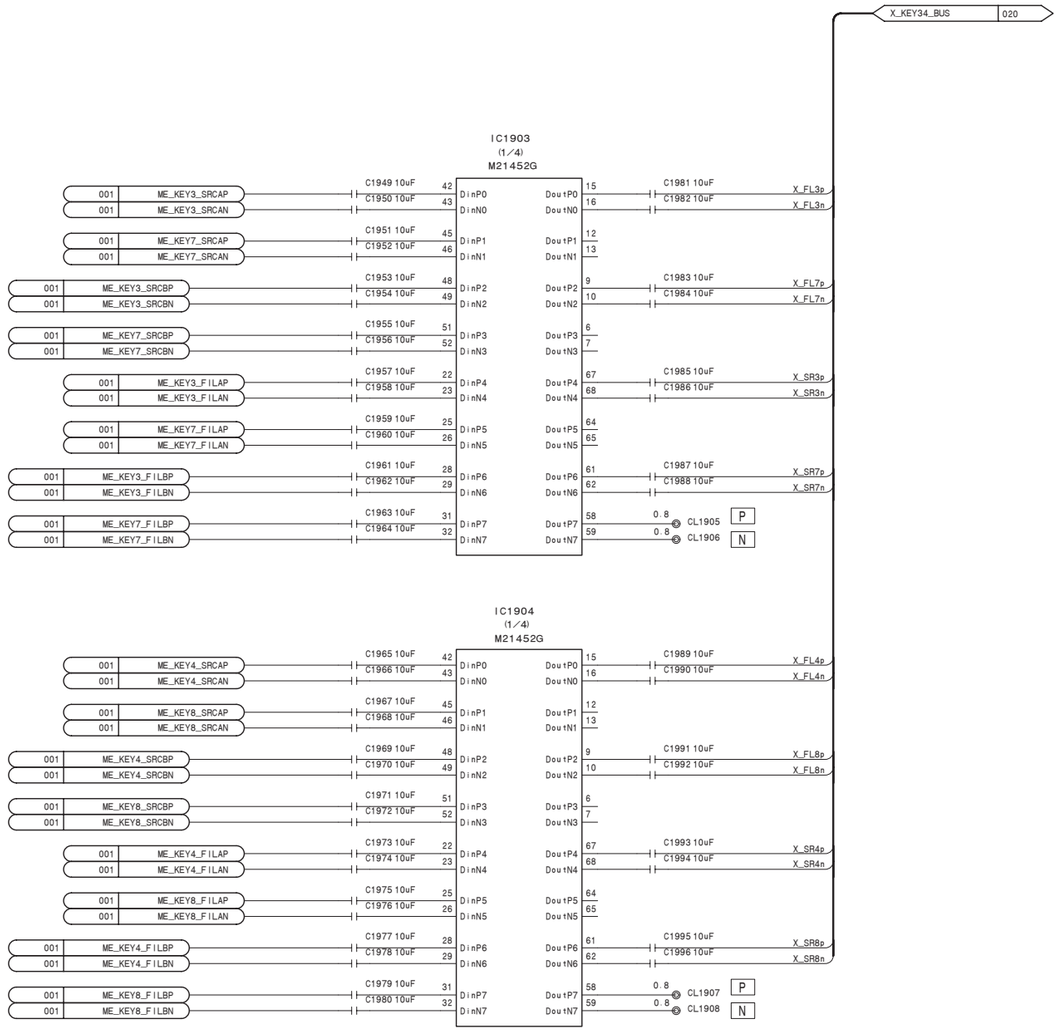

MIX-53 (18/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_18

MIX-53 (19/48)
SUFFIX: -13

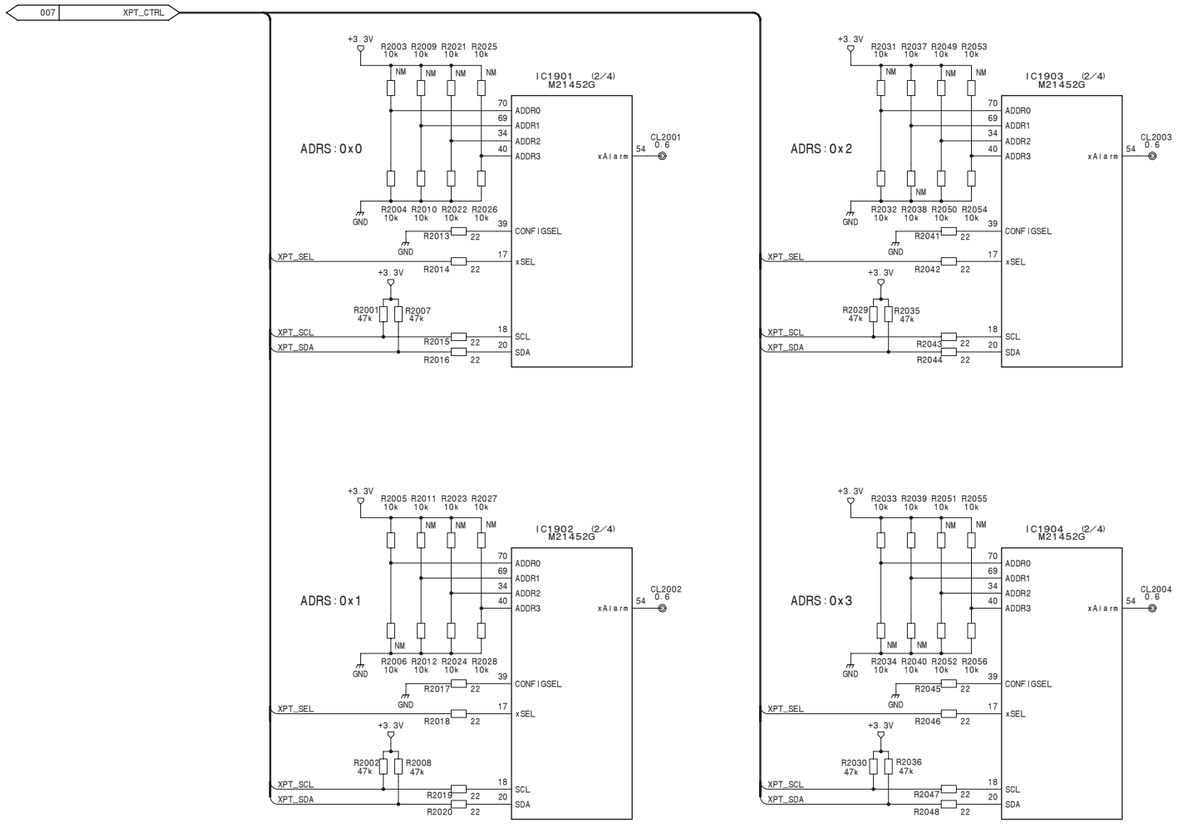

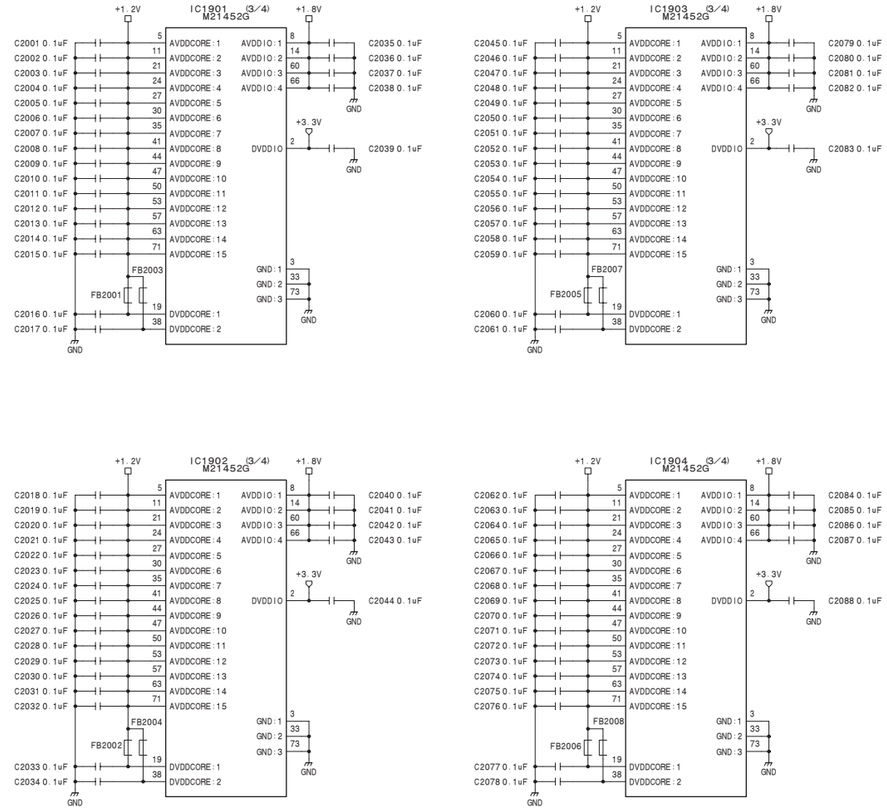



MIX-53 (19/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_19

MIX-53 (20/48)
SUFFIX: -13

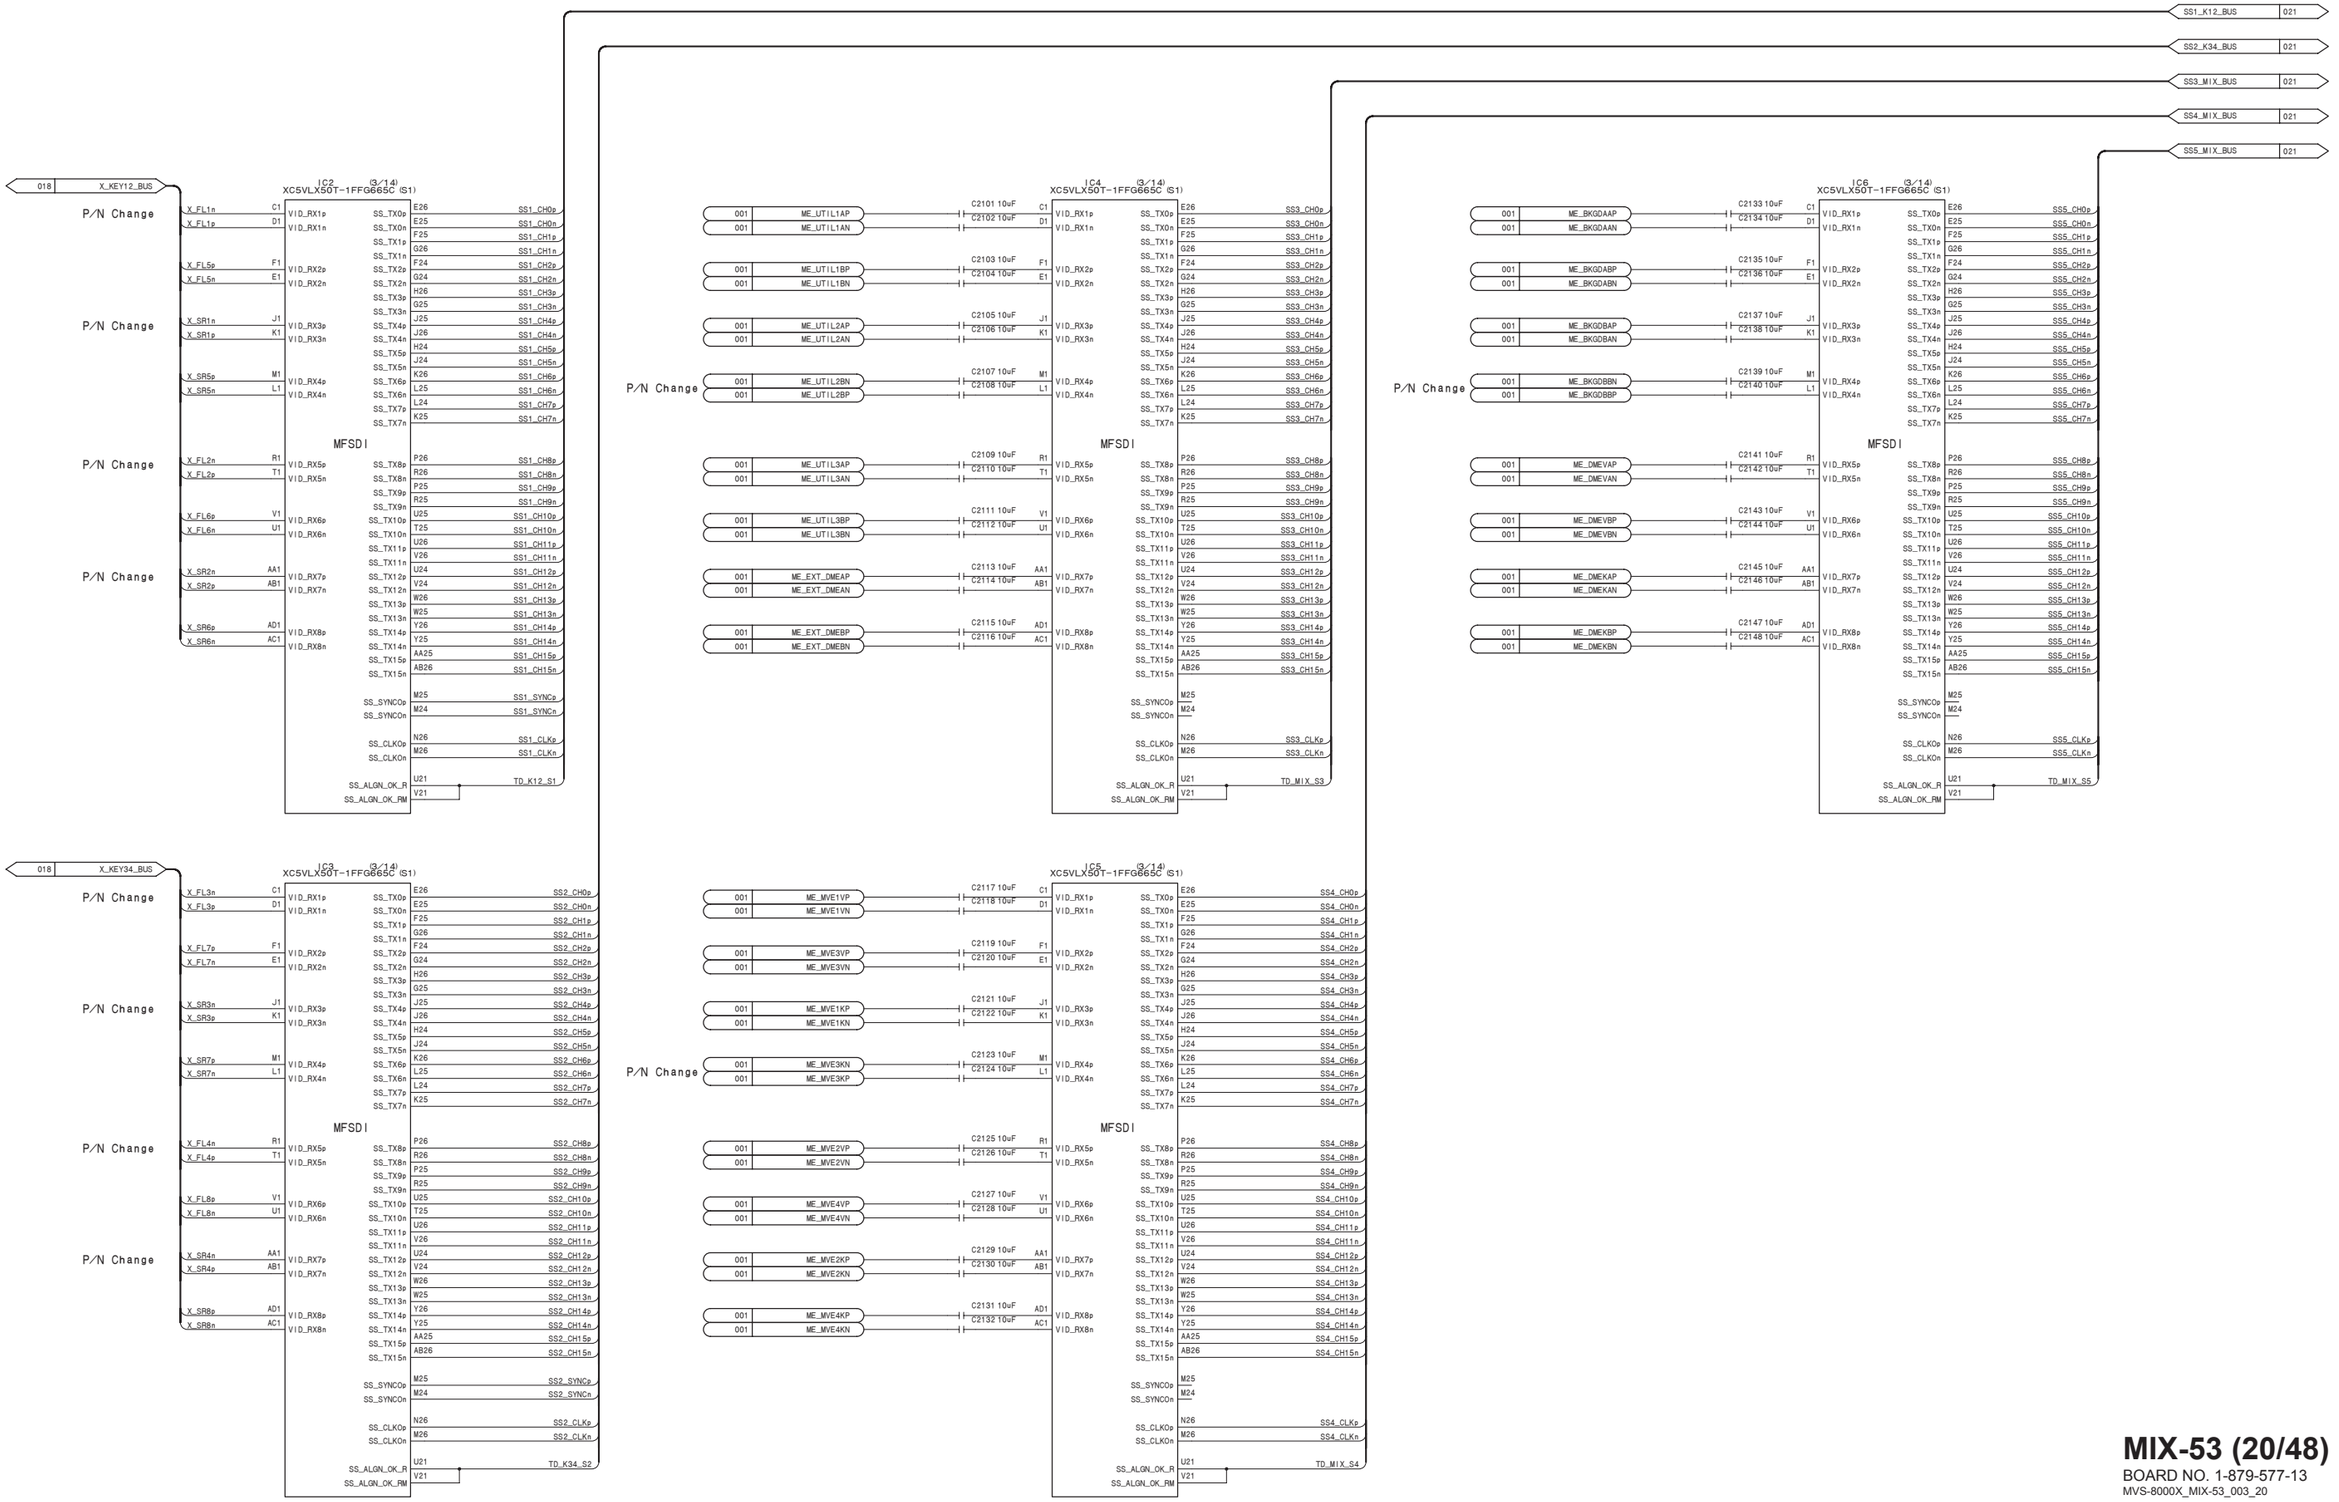

MIX-53 (20/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_20

MIX-53 (21/48) SUFFIX: -13

020 SS4_MIX_BUS
020 SS3_MIX_BUS
020 SS5_MIX_BUS
020 SS1_K12_BUS
020 SS2_K34_BUS

IC7 (5/16) EP3SL200F1152C4N

SS1_CH0p V4 — SS_FL1VCI
SS1_CH0n V3 — SS_FL1VCI (n)
SS1_CH1p AA4 — SS_FL1VYI
SS1_CH1n Y3 — SS_FL1VYI (n)
SS1_CH2p Y4 — SS_SRC1VCI
SS1_CH2n W3 — SS_SRC1VCI (n)
SS1_CH3p Y2 — SS_SRC1VYI
SS1_CH3n Y1 — SS_SRC1VYI (n)
SS1_CH4p AB4 — SS_FL2VCI
SS1_CH4n AA3 — SS_FL2VCI (n)
SS1_CH5p AA1 — SS_FL2VYI
SS1_CH5n AB1 — SS_FL2VYI (n)
SS1_CH6p AB2 — SS_SRC2VCI
SS1_CH6n AC1 — SS_SRC2VCI (n)
SS1_CH7p AC2 — SS_SRC2VYI
SS1_CH7n AD1 — SS_SRC2VYI (n)

KEYER

SS1_CH8p AE2 — SS_FL3VCI
SS1_CH8n AE1 — SS_FL3VCI (n)
SS1_CH9p AF2 — SS_FL3VYI
SS1_CH9n AF1 — SS_FL3VYI (n)
SS1_CH10p AJ4 — SS_SRC3VCI
SS1_CH10n AJ3 — SS_SRC3VCI (n)
SS1_CH11p AF4 — SS_SRC3VYI
SS1_CH11n AF3 — SS_SRC3VYI (n)
SS1_CH12p AG4 — SS_FL4VCI
SS1_CH12n AG3 — SS_FL4VCI (n)
SS1_CH13p AJ2 — SS_FL4VYI
SS1_CH13n AK1 — SS_FL4VYI (n)
SS1_CH14p AH2 — SS_SRC4VCI
SS1_CH14n AJ1 — SS_SRC4VCI (n)
SS1_CH15p AG1 — SS_SRC4VYI
SS1_CH15n AH1 — SS_SRC4VYI (n)

SS1_SYNCp AE4 — SS_SYNCI_1
SS1_SYNCn AE3 — SS_SYNCI_1 (n)

SS1_CLKp W2 — SS_CLKI_1
SS1_CLKn R2201 100 W1 — SS_CLKI_1 (n)

TD_K12_S1 R3 — OP_SDI_LOCK

KEY12

IC8 (5/16) EP3SL200F1152C4N

SS2_CH0p V4 — SS_FL1VCI
SS2_CH0n V3 — SS_FL1VCI (n)
SS2_CH1p AA4 — SS_FL1VYI
SS2_CH1n Y3 — SS_FL1VYI (n)
SS2_CH2p Y4 — SS_SRC1VCI
SS2_CH2n W3 — SS_SRC1VCI (n)
SS2_CH3p Y2 — SS_SRC1VYI
SS2_CH3n Y1 — SS_SRC1VYI (n)
SS2_CH4p AB4 — SS_FL2VCI
SS2_CH4n AA3 — SS_FL2VCI (n)
SS2_CH5p AA1 — SS_FL2VYI
SS2_CH5n AB1 — SS_FL2VYI (n)
SS2_CH6p AB2 — SS_SRC2VCI
SS2_CH6n AC1 — SS_SRC2VCI (n)
SS2_CH7p AC2 — SS_SRC2VYI
SS2_CH7n AD1 — SS_SRC2VYI (n)

KEYER

SS2_CH8p AE2 — SS_FL3VCI
SS2_CH8n AE1 — SS_FL3VCI (n)
SS2_CH9p AF2 — SS_FL3VYI
SS2_CH9n AF1 — SS_FL3VYI (n)
SS2_CH10p AJ4 — SS_SRC3VCI
SS2_CH10n AJ3 — SS_SRC3VCI (n)
SS2_CH11p AF4 — SS_SRC3VYI
SS2_CH11n AF3 — SS_SRC3VYI (n)
SS2_CH12p AG4 — SS_FL4VCI
SS2_CH12n AG3 — SS_FL4VCI (n)
SS2_CH13p AJ2 — SS_FL4VYI
SS2_CH13n AK1 — SS_FL4VYI (n)
SS2_CH14p AH2 — SS_SRC4VCI
SS2_CH14n AJ1 — SS_SRC4VCI (n)
SS2_CH15p AG1 — SS_SRC4VYI
SS2_CH15n AH1 — SS_SRC4VYI (n)

SS2_SYNCp AE4 — SS_SYNCI_1
SS2_SYNCn AE3 — SS_SYNCI_1 (n)

SS2_CLKp W2 — SS_CLKI_1
SS2_CLKn R2202 100 W1 — SS_CLKI_1 (n)

TD_K34_S2 R3 — OP_SDI_LOCK

KEY34

IC9 (6/25) EP3SL200F1517C4N

SS4_CH0p AC36 — IP_SS_SDI4 [0]
SS4_CH0n AC37 — IP_SS_SDI4 [0] (n)
SS4_CH1p AB36 — IP_SS_SDI4 [1]
SS4_CH1n AB37 — IP_SS_SDI4 [1] (n)
SS4_CH2p AF39 — IP_SS_SDI4 [2]
SS4_CH2n AE39 — IP_SS_SDI4 [2] (n)
SS4_CH3p AC39 — IP_SS_SDI4 [3]
SS4_CH3n AD39 — IP_SS_SDI4 [3] (n)
SS4_CH4p AA36 — IP_SS_SDI4 [4]
SS4_CH4n AA37 — IP_SS_SDI4 [4] (n)
SS4_CH5p AB38 — IP_SS_SDI4 [5]
SS4_CH5n AB39 — IP_SS_SDI4 [5] (n)
SS4_CH6p Y36 — IP_SS_SDI4 [6]
SS4_CH6n Y37 — IP_SS_SDI4 [6] (n)
SS4_CH7p W36 — IP_SS_SDI4 [7]
SS4_CH7n W37 — IP_SS_SDI4 [7] (n)

MIXER

SS4_CH8p U36 — IP_SS_SDI4 [8]
SS4_CH8n U37 — IP_SS_SDI4 [8] (n)
SS4_CH9p T35 — IP_SS_SDI4 [9]
SS4_CH9n T36 — IP_SS_SDI4 [9] (n)
SS4_CH10p T38 — IP_SS_SDI4 [10]
SS4_CH10n T39 — IP_SS_SDI4 [10] (n)
SS4_CH11p R39 — IP_SS_SDI4 [11]
SS4_CH11n P39 — IP_SS_SDI4 [11] (n)
SS4_CH12p R37 — IP_SS_SDI4 [12]
SS4_CH12n R38 — IP_SS_SDI4 [12] (n)
SS4_CH13p P36 — IP_SS_SDI4 [13]
SS4_CH13n P37 — IP_SS_SDI4 [13] (n)
SS4_CH14p P33 — IP_SS_SDI4 [14]
SS4_CH14n P34 — IP_SS_SDI4 [14] (n)
SS4_CH15p N34 — IP_SS_SDI4 [15]
SS4_CH15n N35 — IP_SS_SDI4 [15] (n)

SS4_CLKp AA38 — IP_SS_SDI4_CLK
SS4_CLKn R2204 100 AA39 — IP_SS_SDI4_CLK (n)

TD_MIX_S4 AN36 — OP_SDI4_LOCK

MIXER

IC9 (7/25) EP3SL200F1517C4N

SS5_CH0p AM36 — IP_SS_SDI5 [0]
SS5_CH0n AM37 — IP_SS_SDI5 [0] (n)
SS5_CH1p AP38 — IP_SS_SDI5 [1]
SS5_CH1n AN38 — IP_SS_SDI5 [1] (n)
SS5_CH2p AJ36 — IP_SS_SDI5 [2]
SS5_CH2n AJ37 — IP_SS_SDI5 [2] (n)
SS5_CH3p AN39 — IP_SS_SDI5 [3]
SS5_CH3n AM39 — IP_SS_SDI5 [3] (n)
SS5_CH4p AL37 — IP_SS_SDI5 [4]
SS5_CH4n AK38 — IP_SS_SDI5 [4] (n)
SS5_CH5p AL38 — IP_SS_SDI5 [5]
SS5_CH5n AL39 — IP_SS_SDI5 [5] (n)
SS5_CH6p AK39 — IP_SS_SDI5 [6]
SS5_CH6n AJ39 — IP_SS_SDI5 [6] (n)
SS5_CH7p AF34 — IP_SS_SDI5 [7]
SS5_CH7n AG35 — IP_SS_SDI5 [7] (n)

MIXER

SS5_CH8p AG38 — IP_SS_SDI5 [8]
SS5_CH8n AG39 — IP_SS_SDI5 [8] (n)
SS5_CH9p AH38 — IP_SS_SDI5 [9]
SS5_CH9n AH39 — IP_SS_SDI5 [9] (n)
SS5_CH10p AG36 — IP_SS_SDI5 [10]
SS5_CH10n AH37 — IP_SS_SDI5 [10] (n)
SS5_CH11p AF36 — IP_SS_SDI5 [11]
SS5_CH11n AF37 — IP_SS_SDI5 [11] (n)
SS5_CH12p AD38 — IP_SS_SDI5 [12]
SS5_CH12n AE38 — IP_SS_SDI5 [12] (n)
SS5_CH13p AE36 — IP_SS_SDI5 [13]
SS5_CH13n AE37 — IP_SS_SDI5 [13] (n)
SS5_CH14p AD35 — IP_SS_SDI5 [14]
SS5_CH14n AD36 — IP_SS_SDI5 [14] (n)
SS5_CH15p AE34 — IP_SS_SDI5 [15]
SS5_CH15n AE35 — IP_SS_SDI5 [15] (n)

SS5_CLKp AU38 — IP_SS_SDI5_CLK
SS5_CLKn R2205 100 AU39 — IP_SS_SDI5_CLK (n)

TD_MIX_S5 AR39 — OP_SDI5_LOCK

MIXER

IC9 (5/25) EP3SL200F1517C4N

SS3_CH0p N38 — IP_SS_SDI3 [0]
SS3_CH0n N39 — IP_SS_SDI3 [0] (n)
SS3_CH1p M35 — IP_SS_SDI3 [1]
SS3_CH1n M36 — IP_SS_SDI3 [1] (n)
SS3_CH2p M38 — IP_SS_SDI3 [2]
SS3_CH2n M39 — IP_SS_SDI3 [2] (n)
SS3_CH3p N36 — IP_SS_SDI3 [3]
SS3_CH3n N37 — IP_SS_SDI3 [3] (n)
SS3_CH4p L39 — IP_SS_SDI3 [4]
SS3_CH4n K39 — IP_SS_SDI3 [4] (n)
SS3_CH5p K37 — IP_SS_SDI3 [5]
SS3_CH5n K38 — IP_SS_SDI3 [5] (n)
SS3_CH6p J38 — IP_SS_SDI3 [6]
SS3_CH6n J39 — IP_SS_SDI3 [6] (n)
SS3_CH7p H36 — IP_SS_SDI3 [7]
SS3_CH7n H37 — IP_SS_SDI3 [7] (n)

MIXER

SS3_CH8p G36 — IP_SS_SDI3 [8]
SS3_CH8n F36 — IP_SS_SDI3 [8] (n)
SS3_CH9p G37 — IP_SS_SDI3 [9]
SS3_CH9n G38 — IP_SS_SDI3 [9] (n)
SS3_CH10p H34 — IP_SS_SDI3 [10]
SS3_CH10n G35 — IP_SS_SDI3 [10] (n)
SS3_CH11p F38 — IP_SS_SDI3 [11]
SS3_CH11n F39 — IP_SS_SDI3 [11] (n)
SS3_CH12p H39 — IP_SS_SDI3 [12]
SS3_CH12n G39 — IP_SS_SDI3 [12] (n)
SS3_CH13p E36 — IP_SS_SDI3 [13]
SS3_CH13n E37 — IP_SS_SDI3 [13] (n)
SS3_CH14p D37 — IP_SS_SDI3 [14]
SS3_CH14n D38 — IP_SS_SDI3 [14] (n)
SS3_CH15p E39 — IP_SS_SDI3 [15]
SS3_CH15n D39 — IP_SS_SDI3 [15] (n)

SS3_CLKp C38 — IP_SS_SDI3_CLK
SS3_CLKn R2203 100 C39 — IP_SS_SDI3_CLK (n)

TD_MIX_S3 AL35 — OP_SDI3_LOCK

MIXER

MIX-53 (21/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_21

MIX-53 (22/48)
SUFFIX: -13

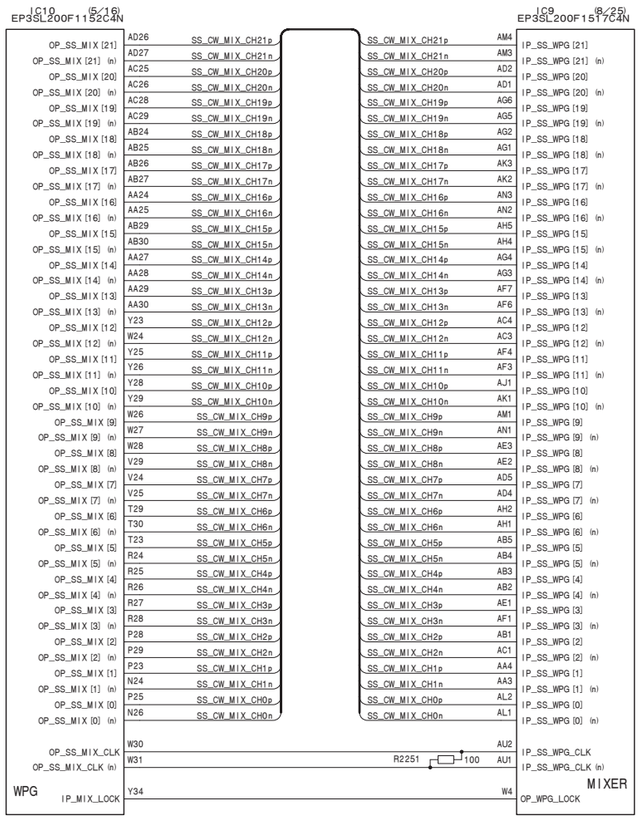

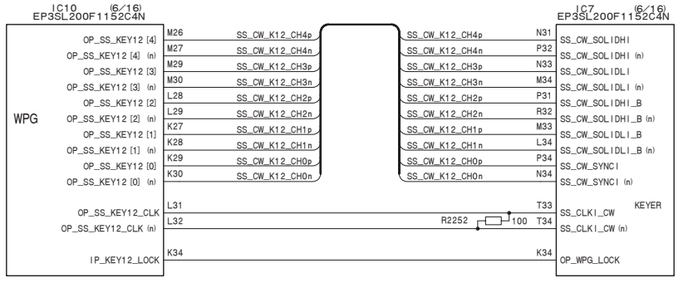

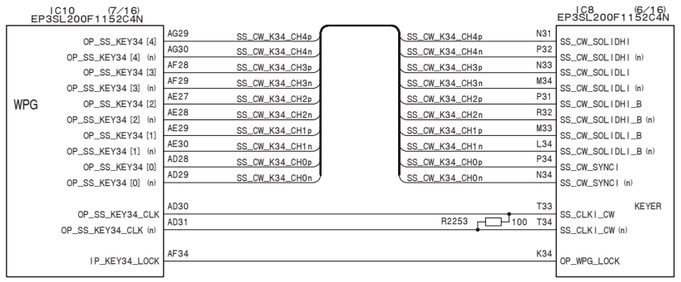

MIX-53 (22/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_22

MIX-53 (23/48)
SUFFIX: -13

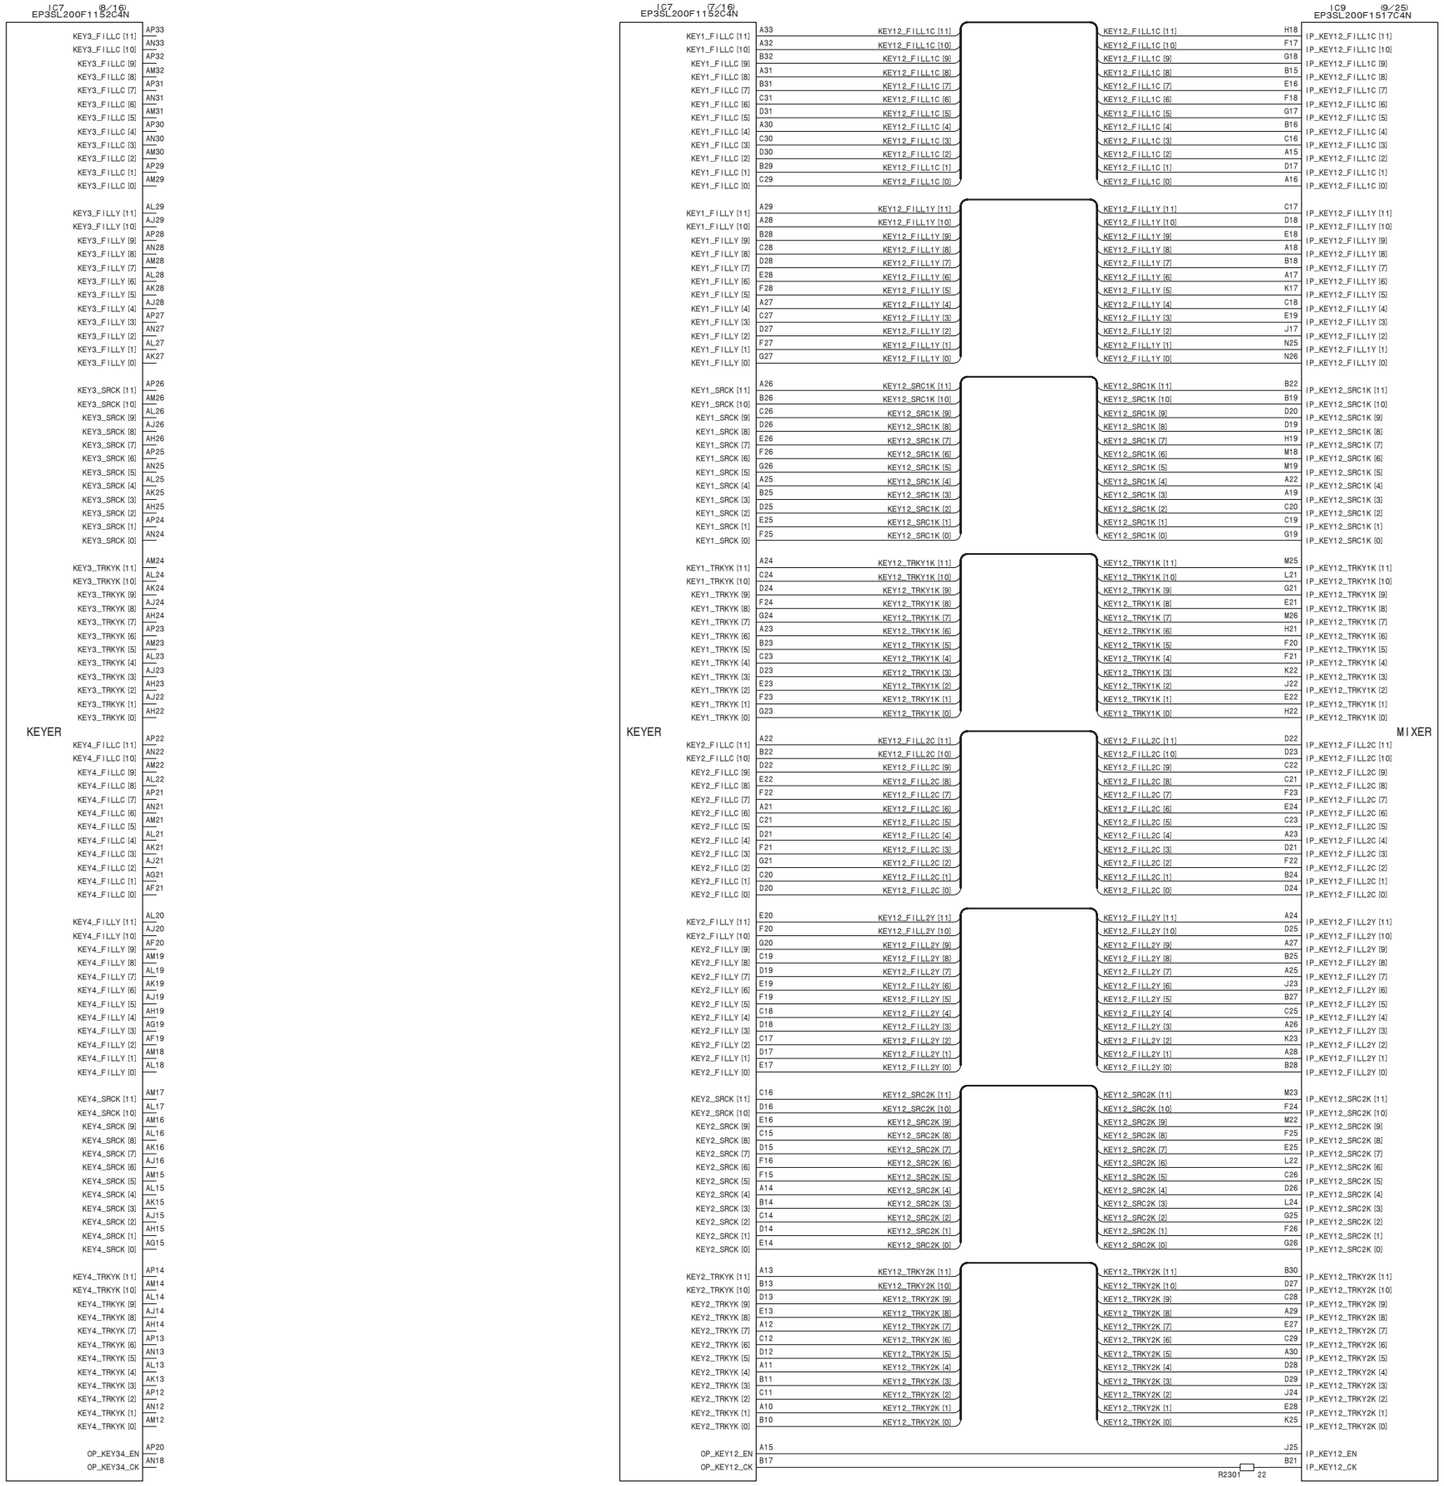

MIX-53 (23/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_23

MIX-53 (24/48)
SUFFIX: -13

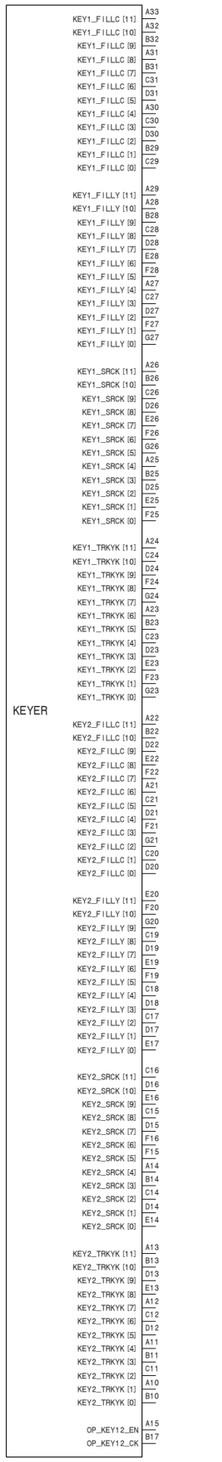

KEY34 (No Use Side)

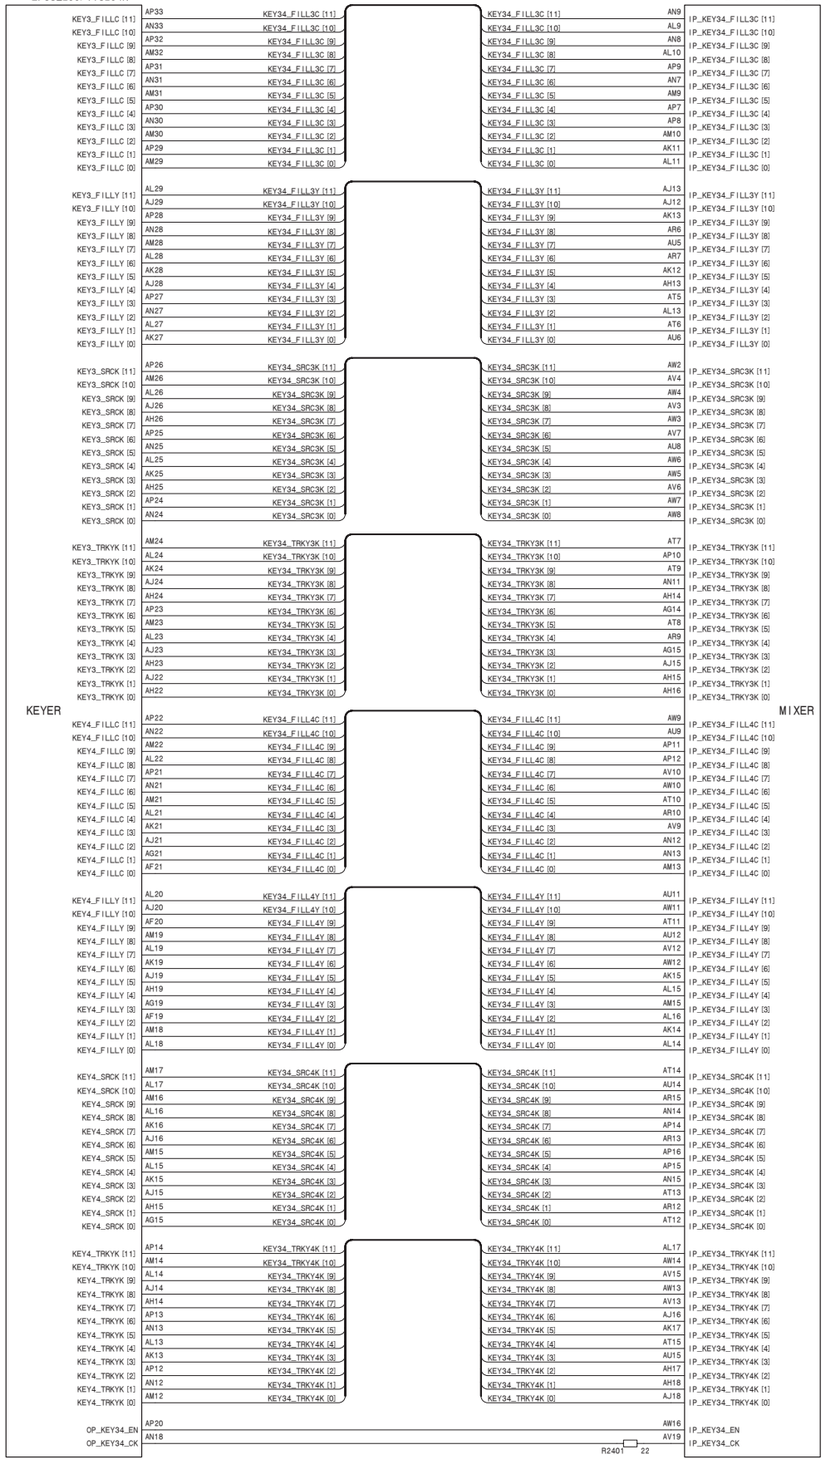

KEY34

MIXER

MIX-53 (24/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_24

MIX-53 (25/48)
SUFFIX: -13

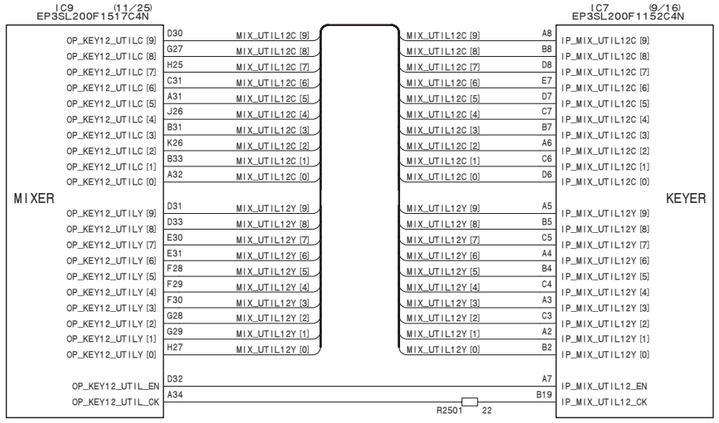

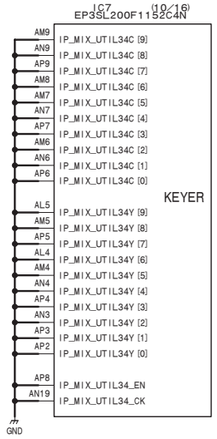

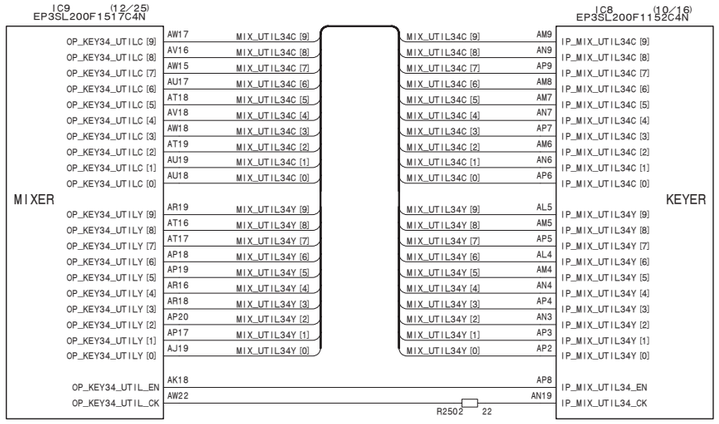

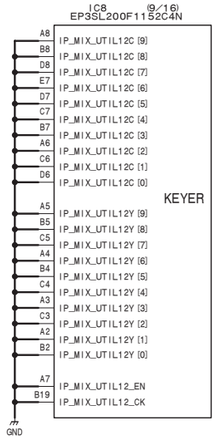

MIX-53 (25/48)

BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_25

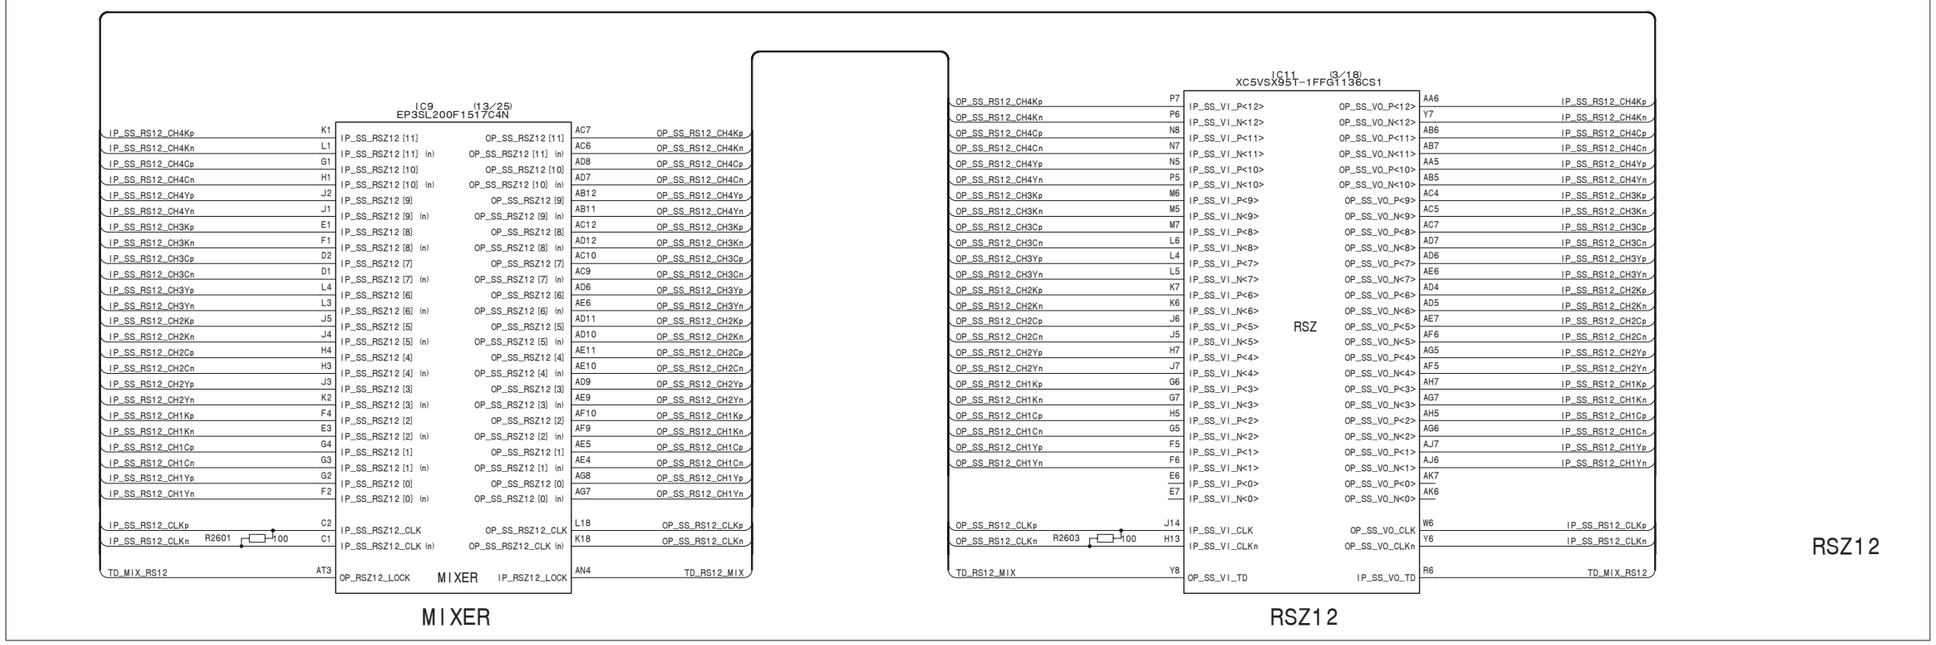

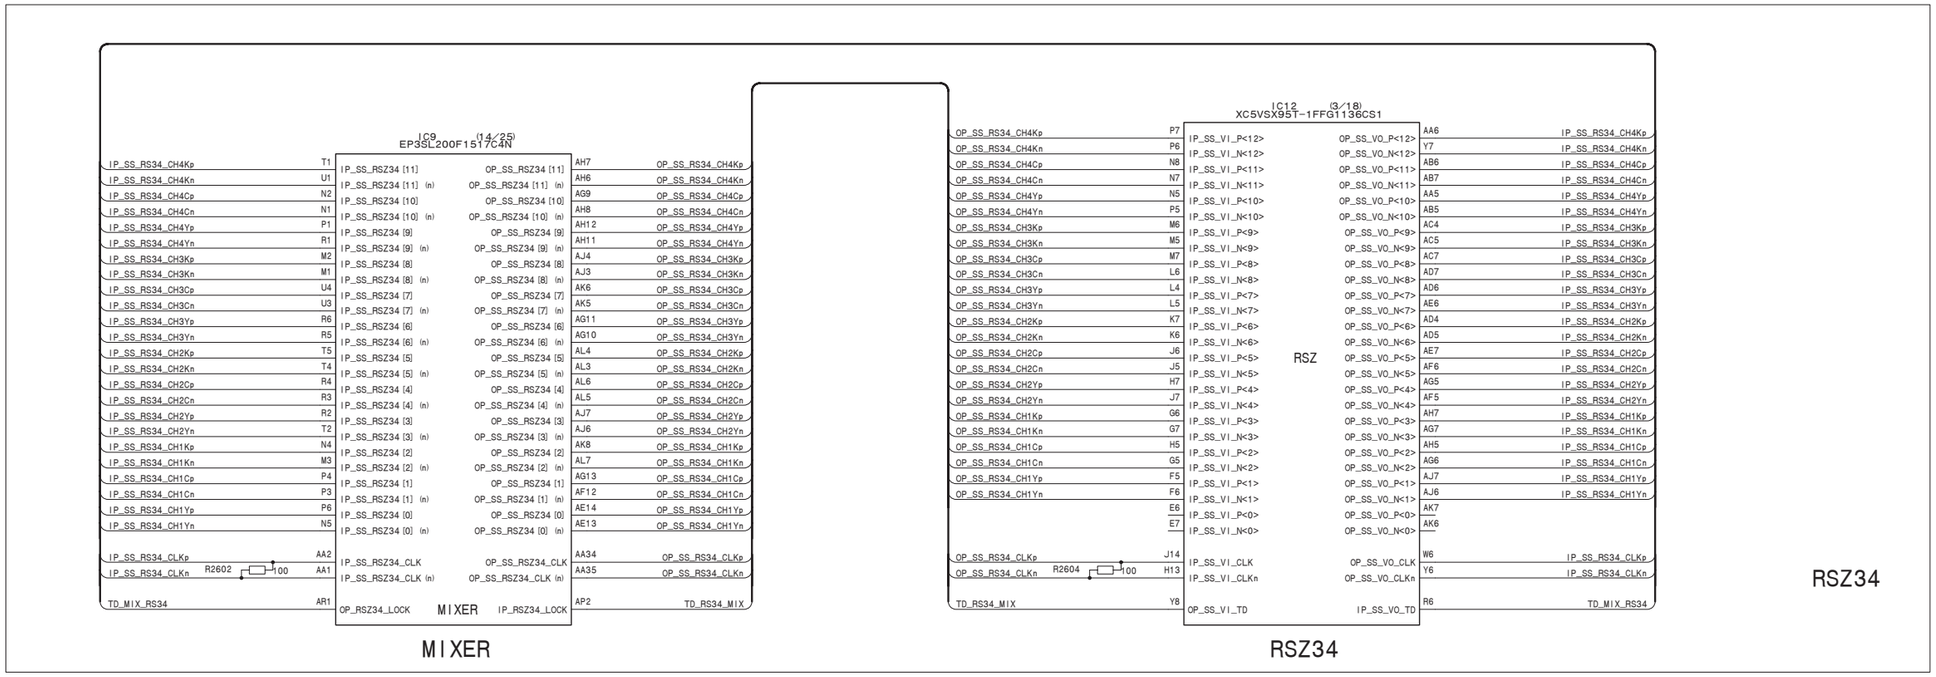

MIX-53 (26/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_26

MIX-53 (27/48)

SUFFIX: -13

MIX-53 (27/48)

SUFFIX: -13

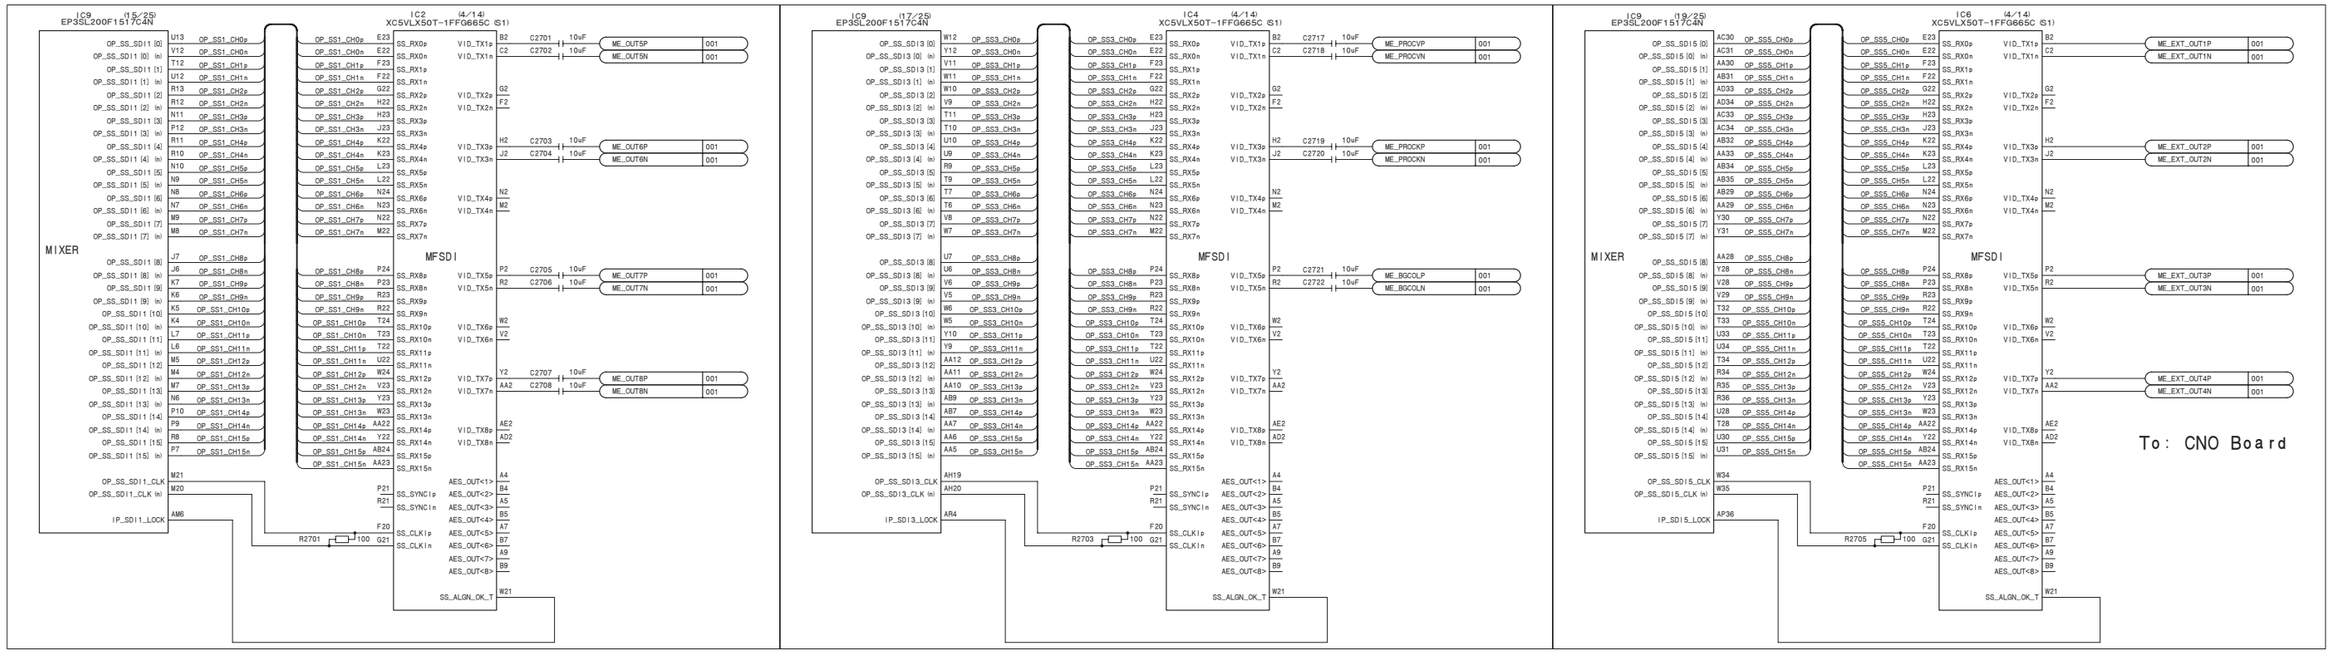

MIX-53 (27/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_27

MIX-53 (28/48)
SUFFIX: -13

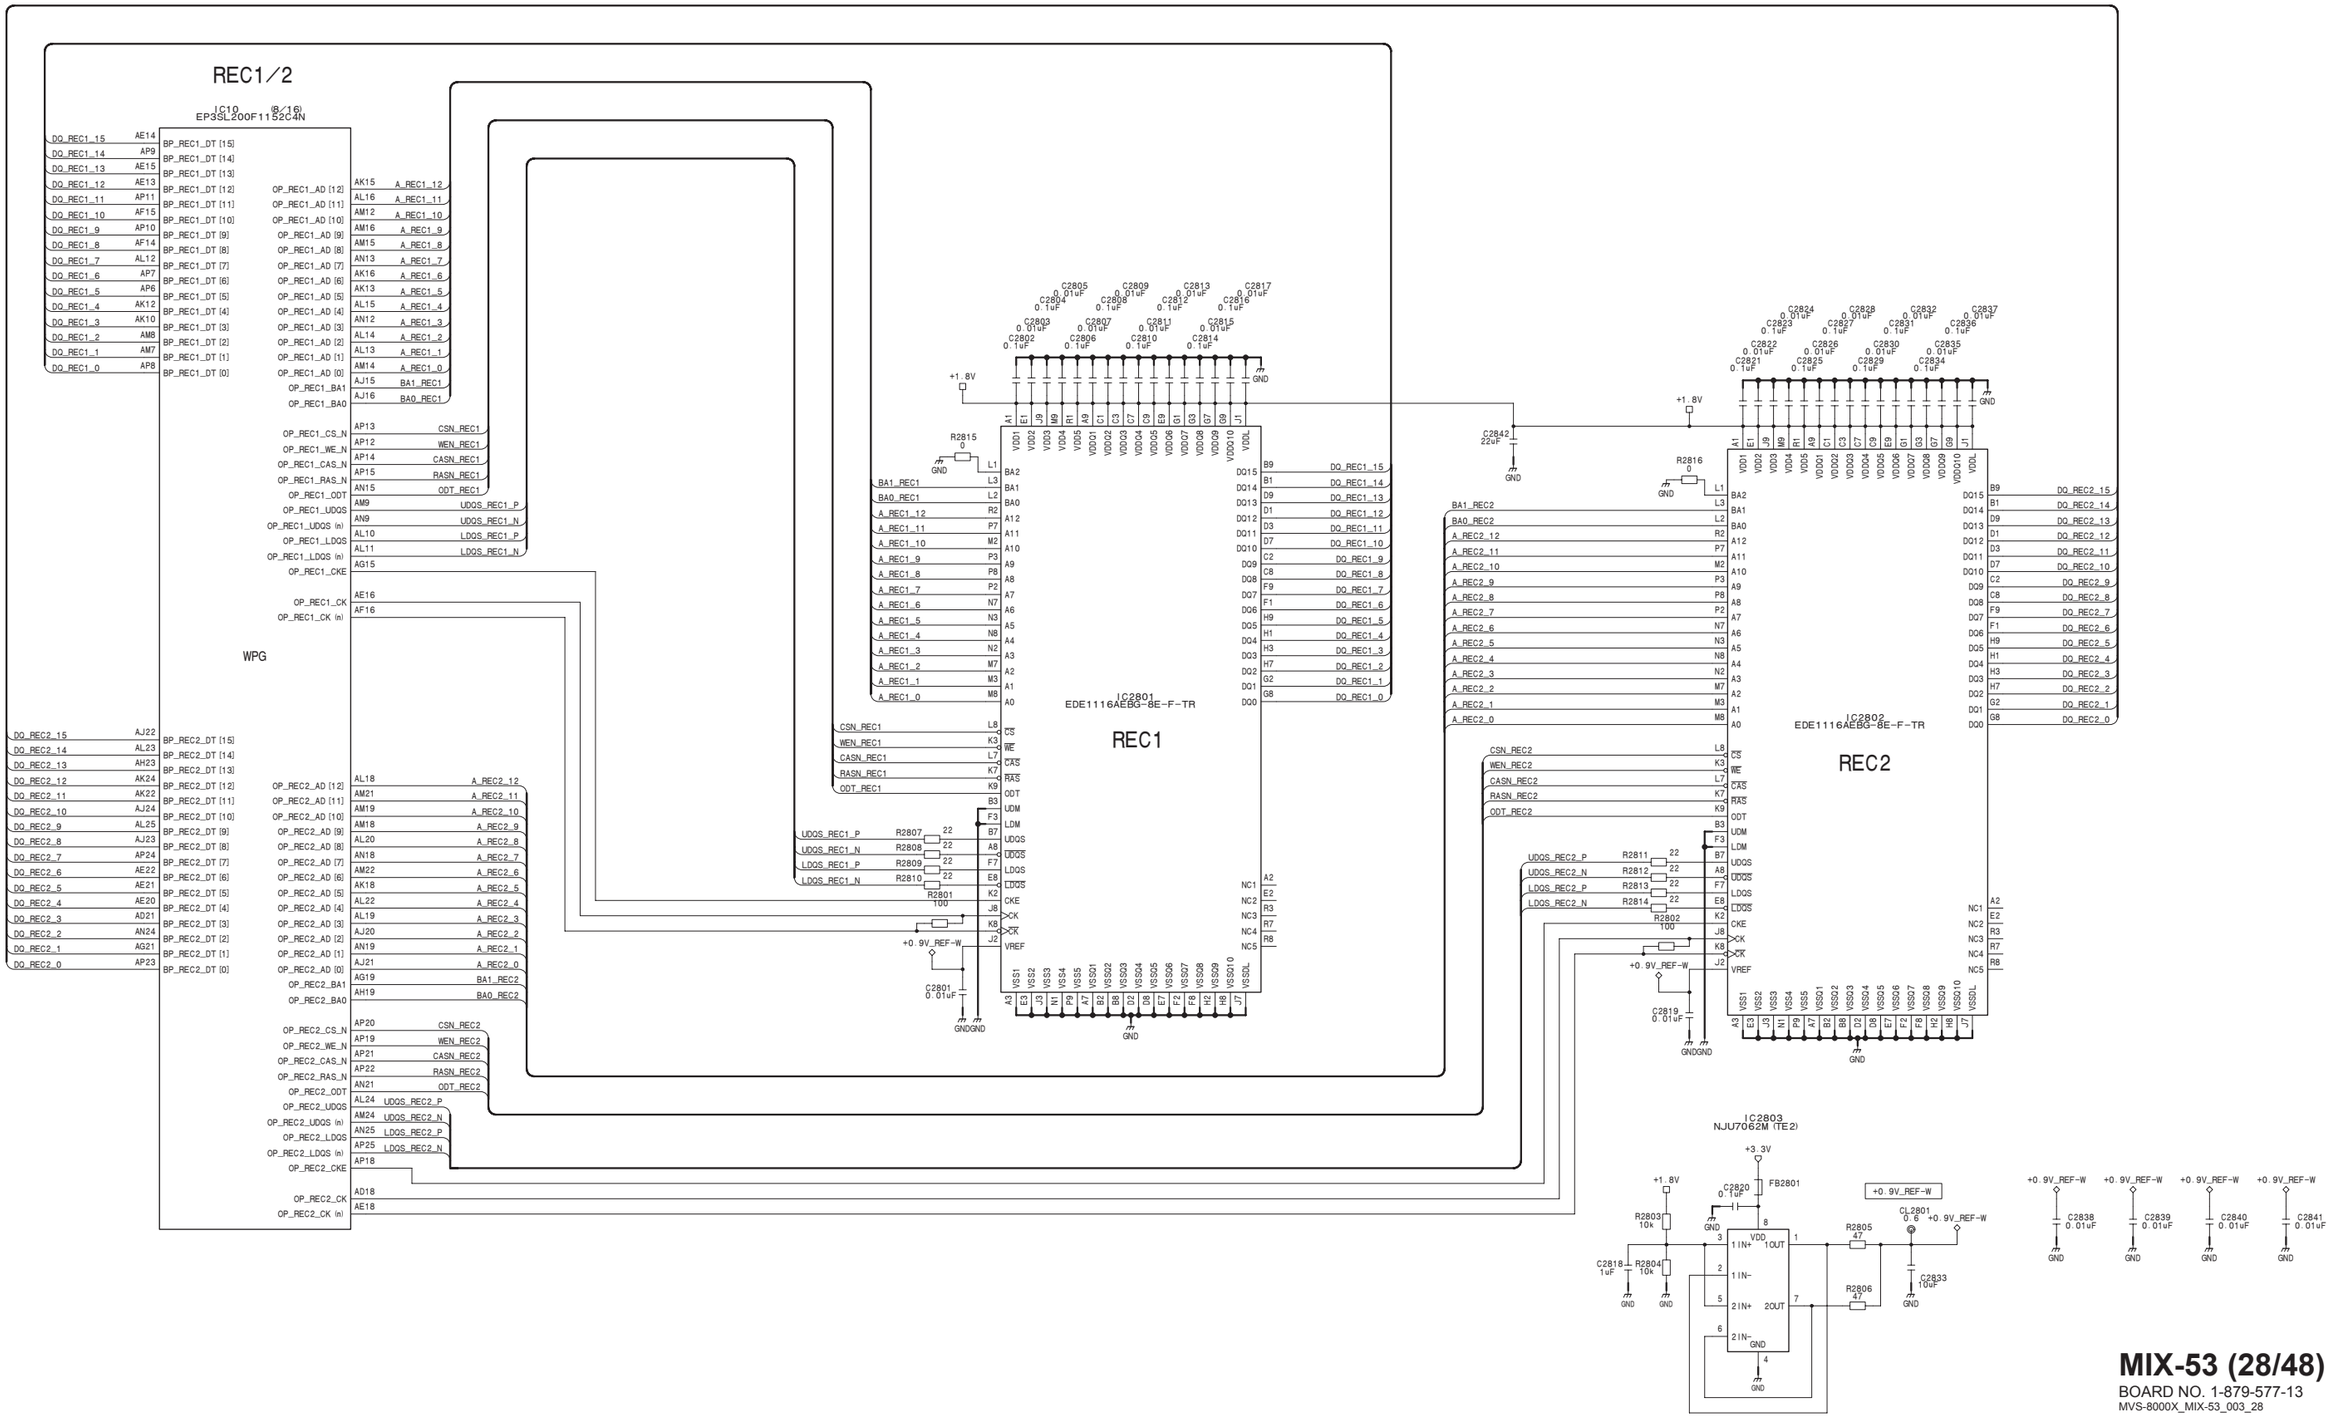

MIX-53 (28/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_28

MIX-53 (29/48)
SUFFIX: -13

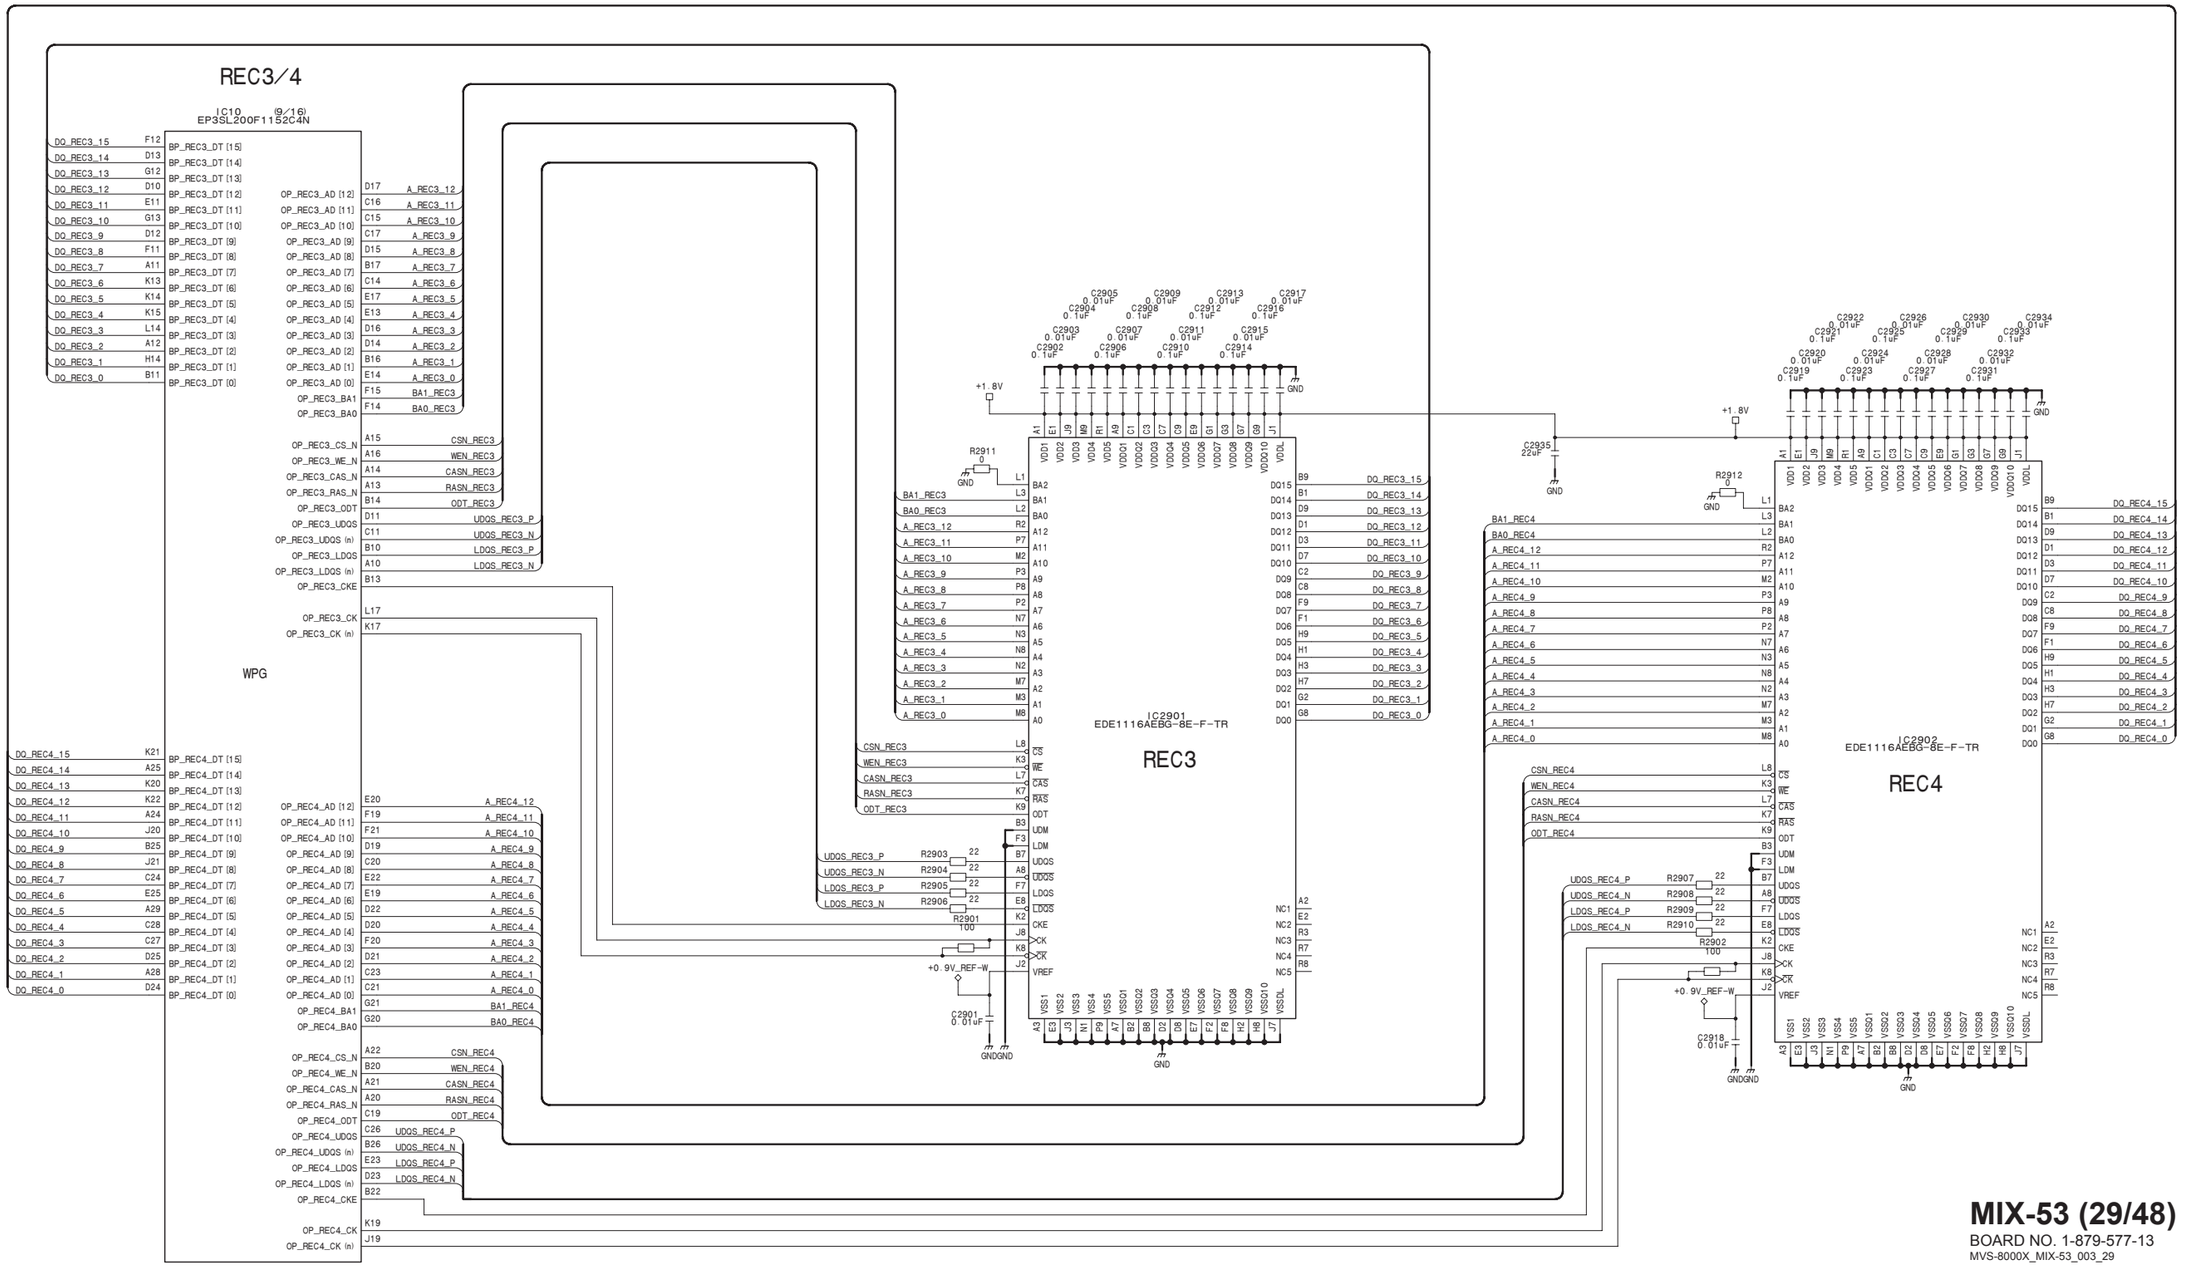

MIX-53 (29/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_29

MIX-53 (30/48)
SUFFIX: -13

RSZ12_TOP_CKE | 031

IC11 (4/18)
XC5VSX95T-1FFG1136CS1

RSZ

SRC0

SRC1

IC3001
EDE1116AEBG-8E-F-TR

IC3002
EDE1116AEBG-8E-F-TR

IC3003
NJU7062M (TE2)

4-216

MVS-8000X/7000X

MIX-53 (30/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_30

MIX-53 (31/48)
SUFFIX: -13

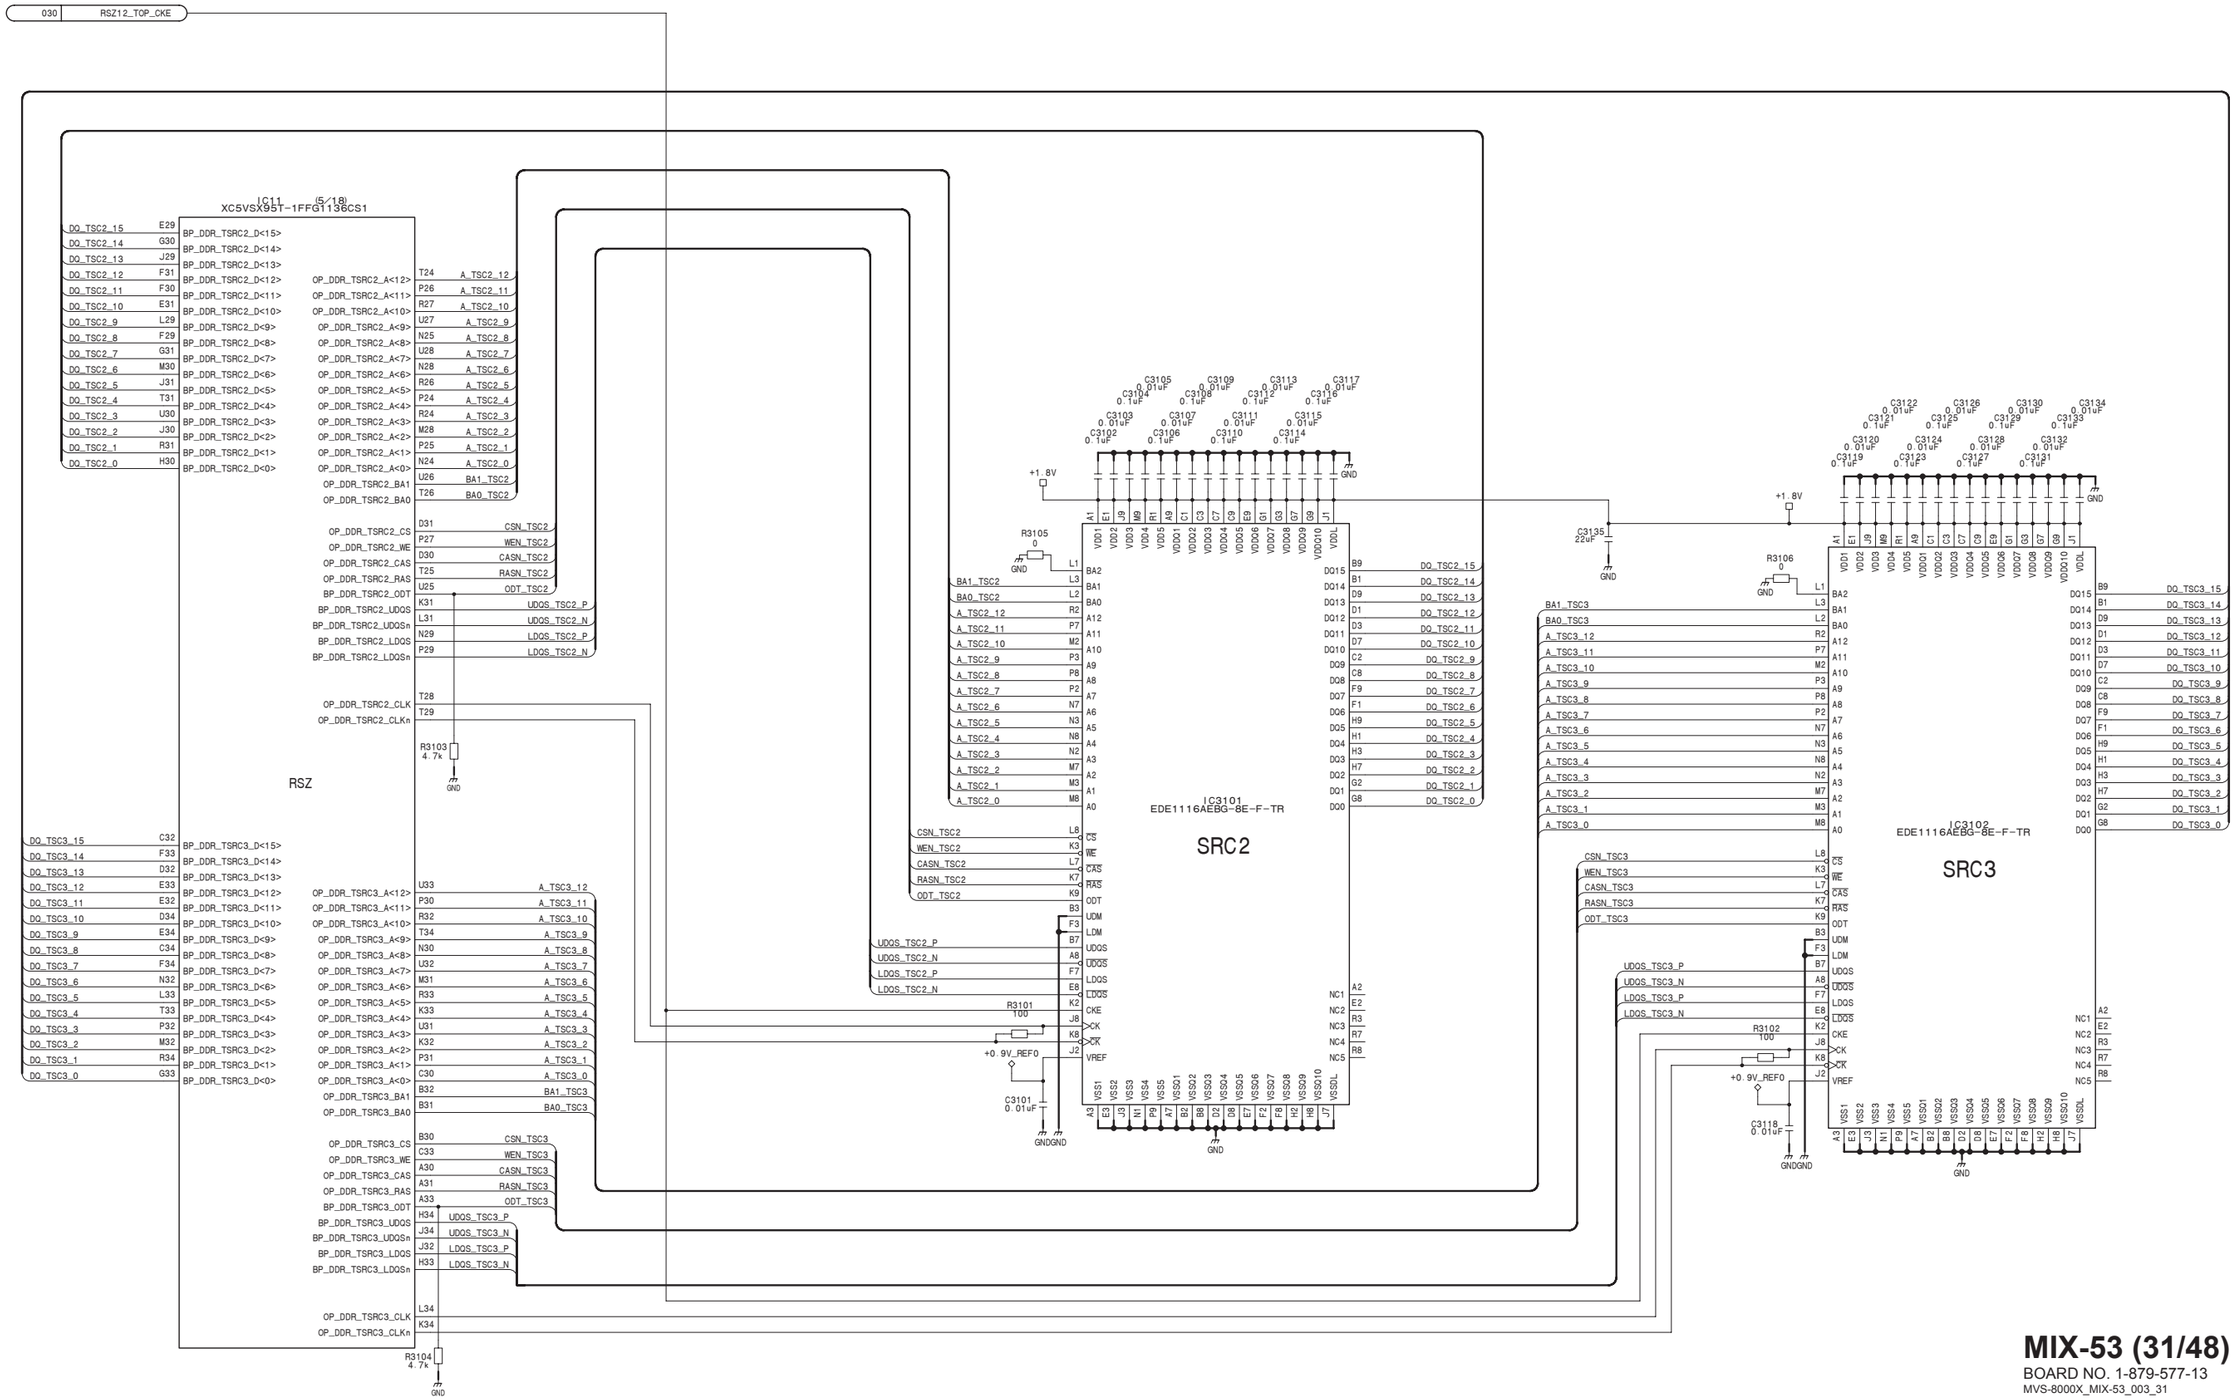

MIX-53 (31/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_31

MIX-53 (32/48)
SUFFIX: -13

RSZ12_BTM_CKE | 033

IC11 (6/18)
XC5VSX95T-1FFG1136CS1

RSZ

IC3201
EDE1116AEBG-8E-F-TR
SRC0

IC3202
EDE1116AEBG-8E-F-TR
SRC1

IC3203
NJU7062M (TE2)

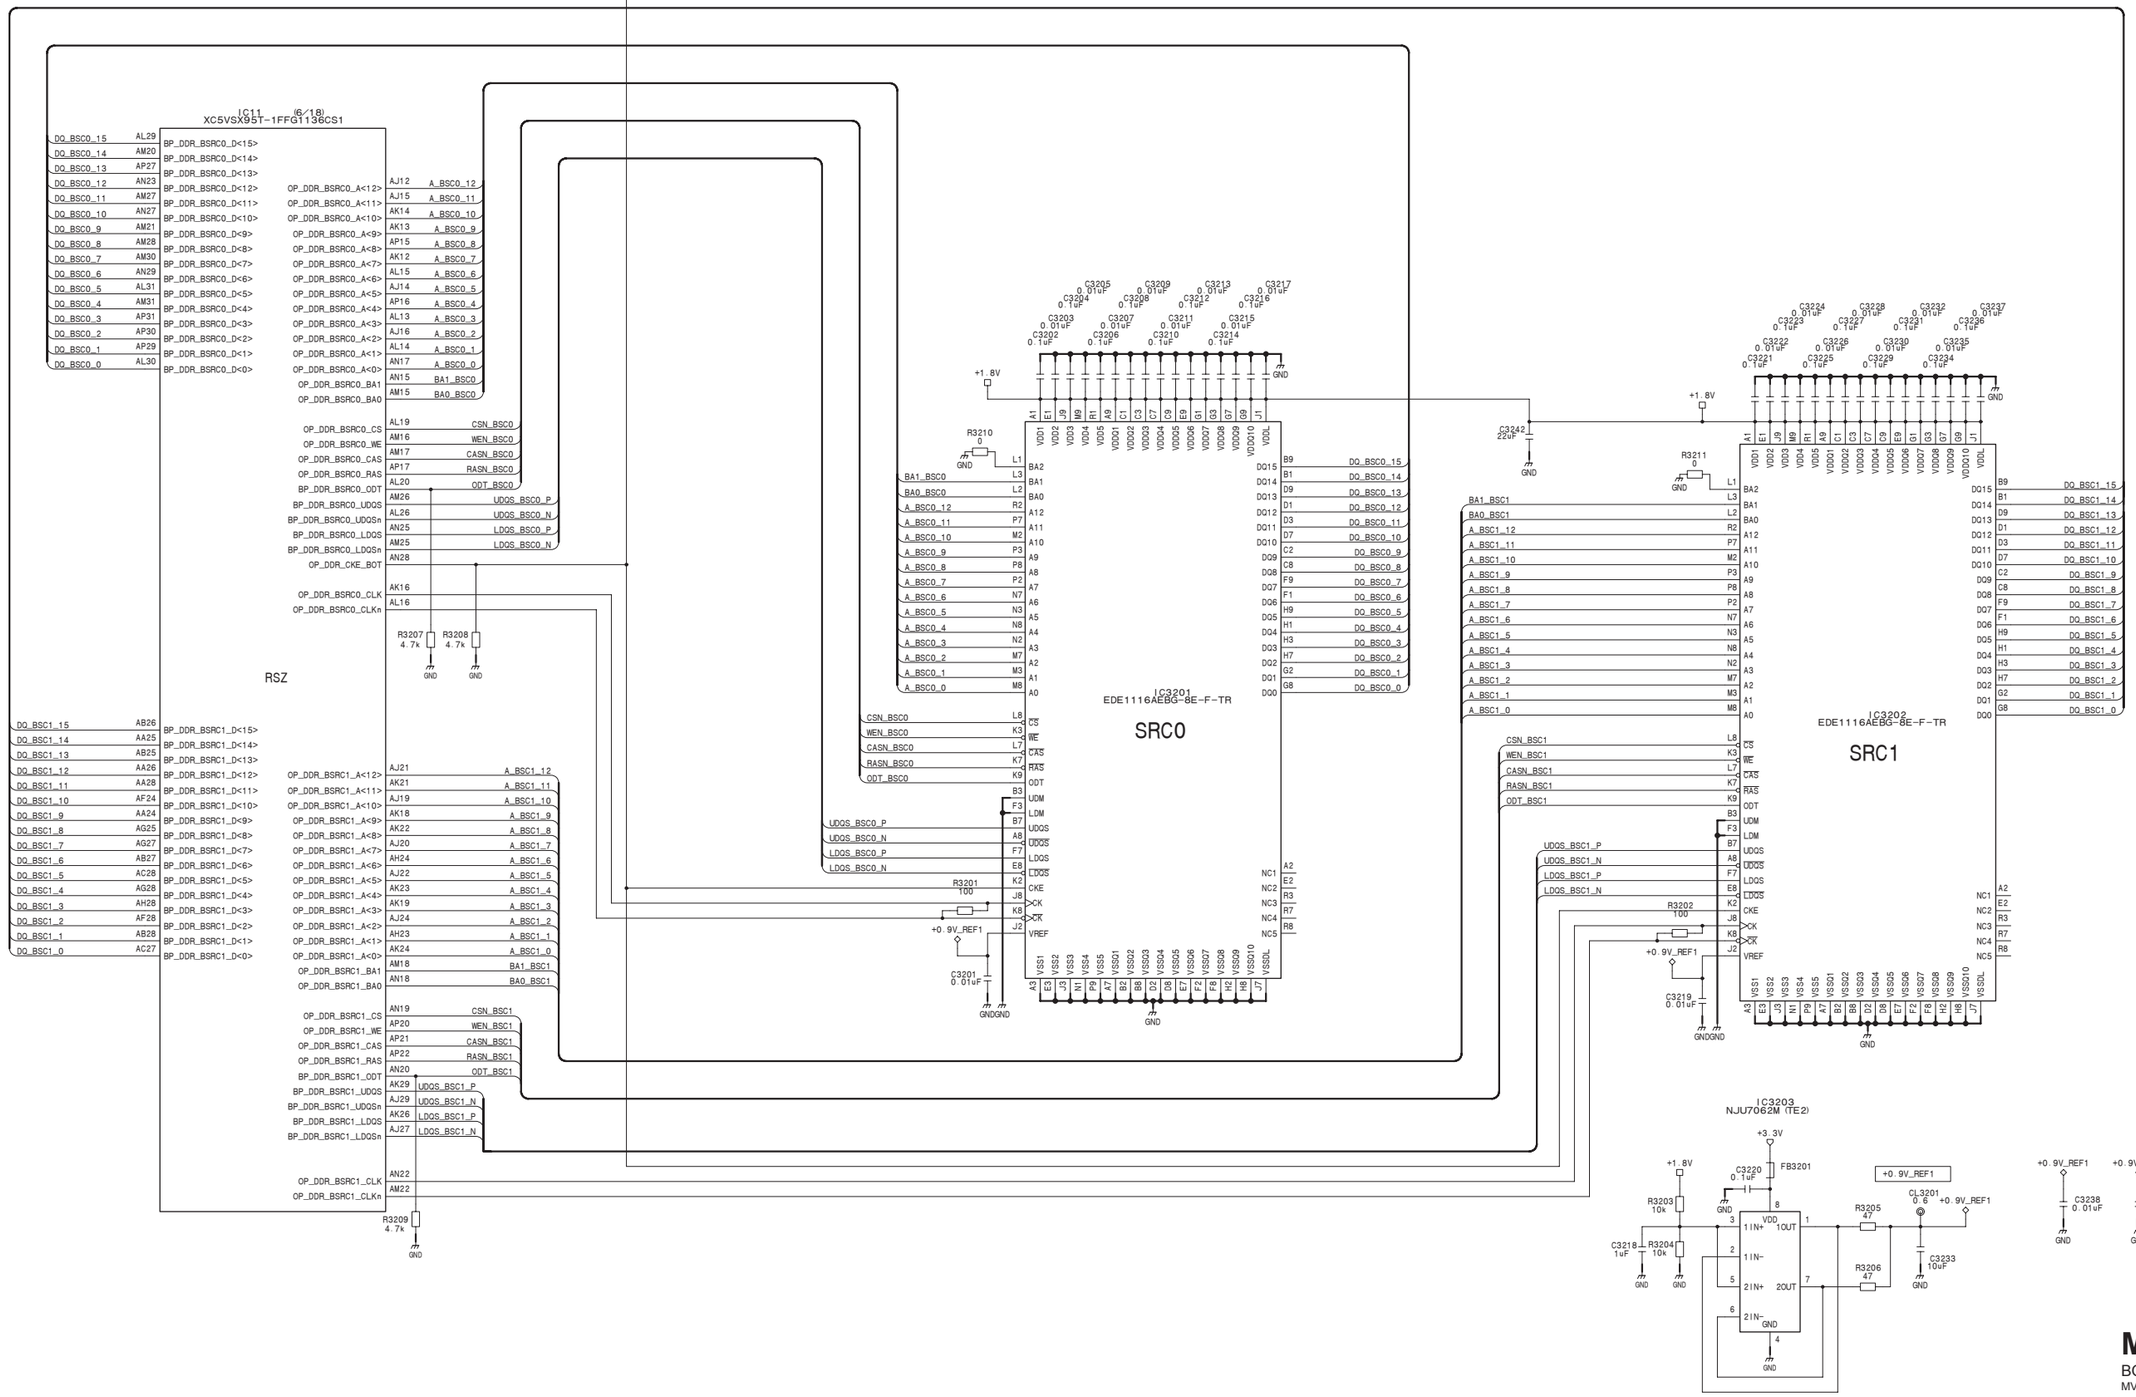

MIX-53 (32/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_32

4-218
MVS-8000X/7000X

MIX-53 (33/48)
SUFFIX: -13

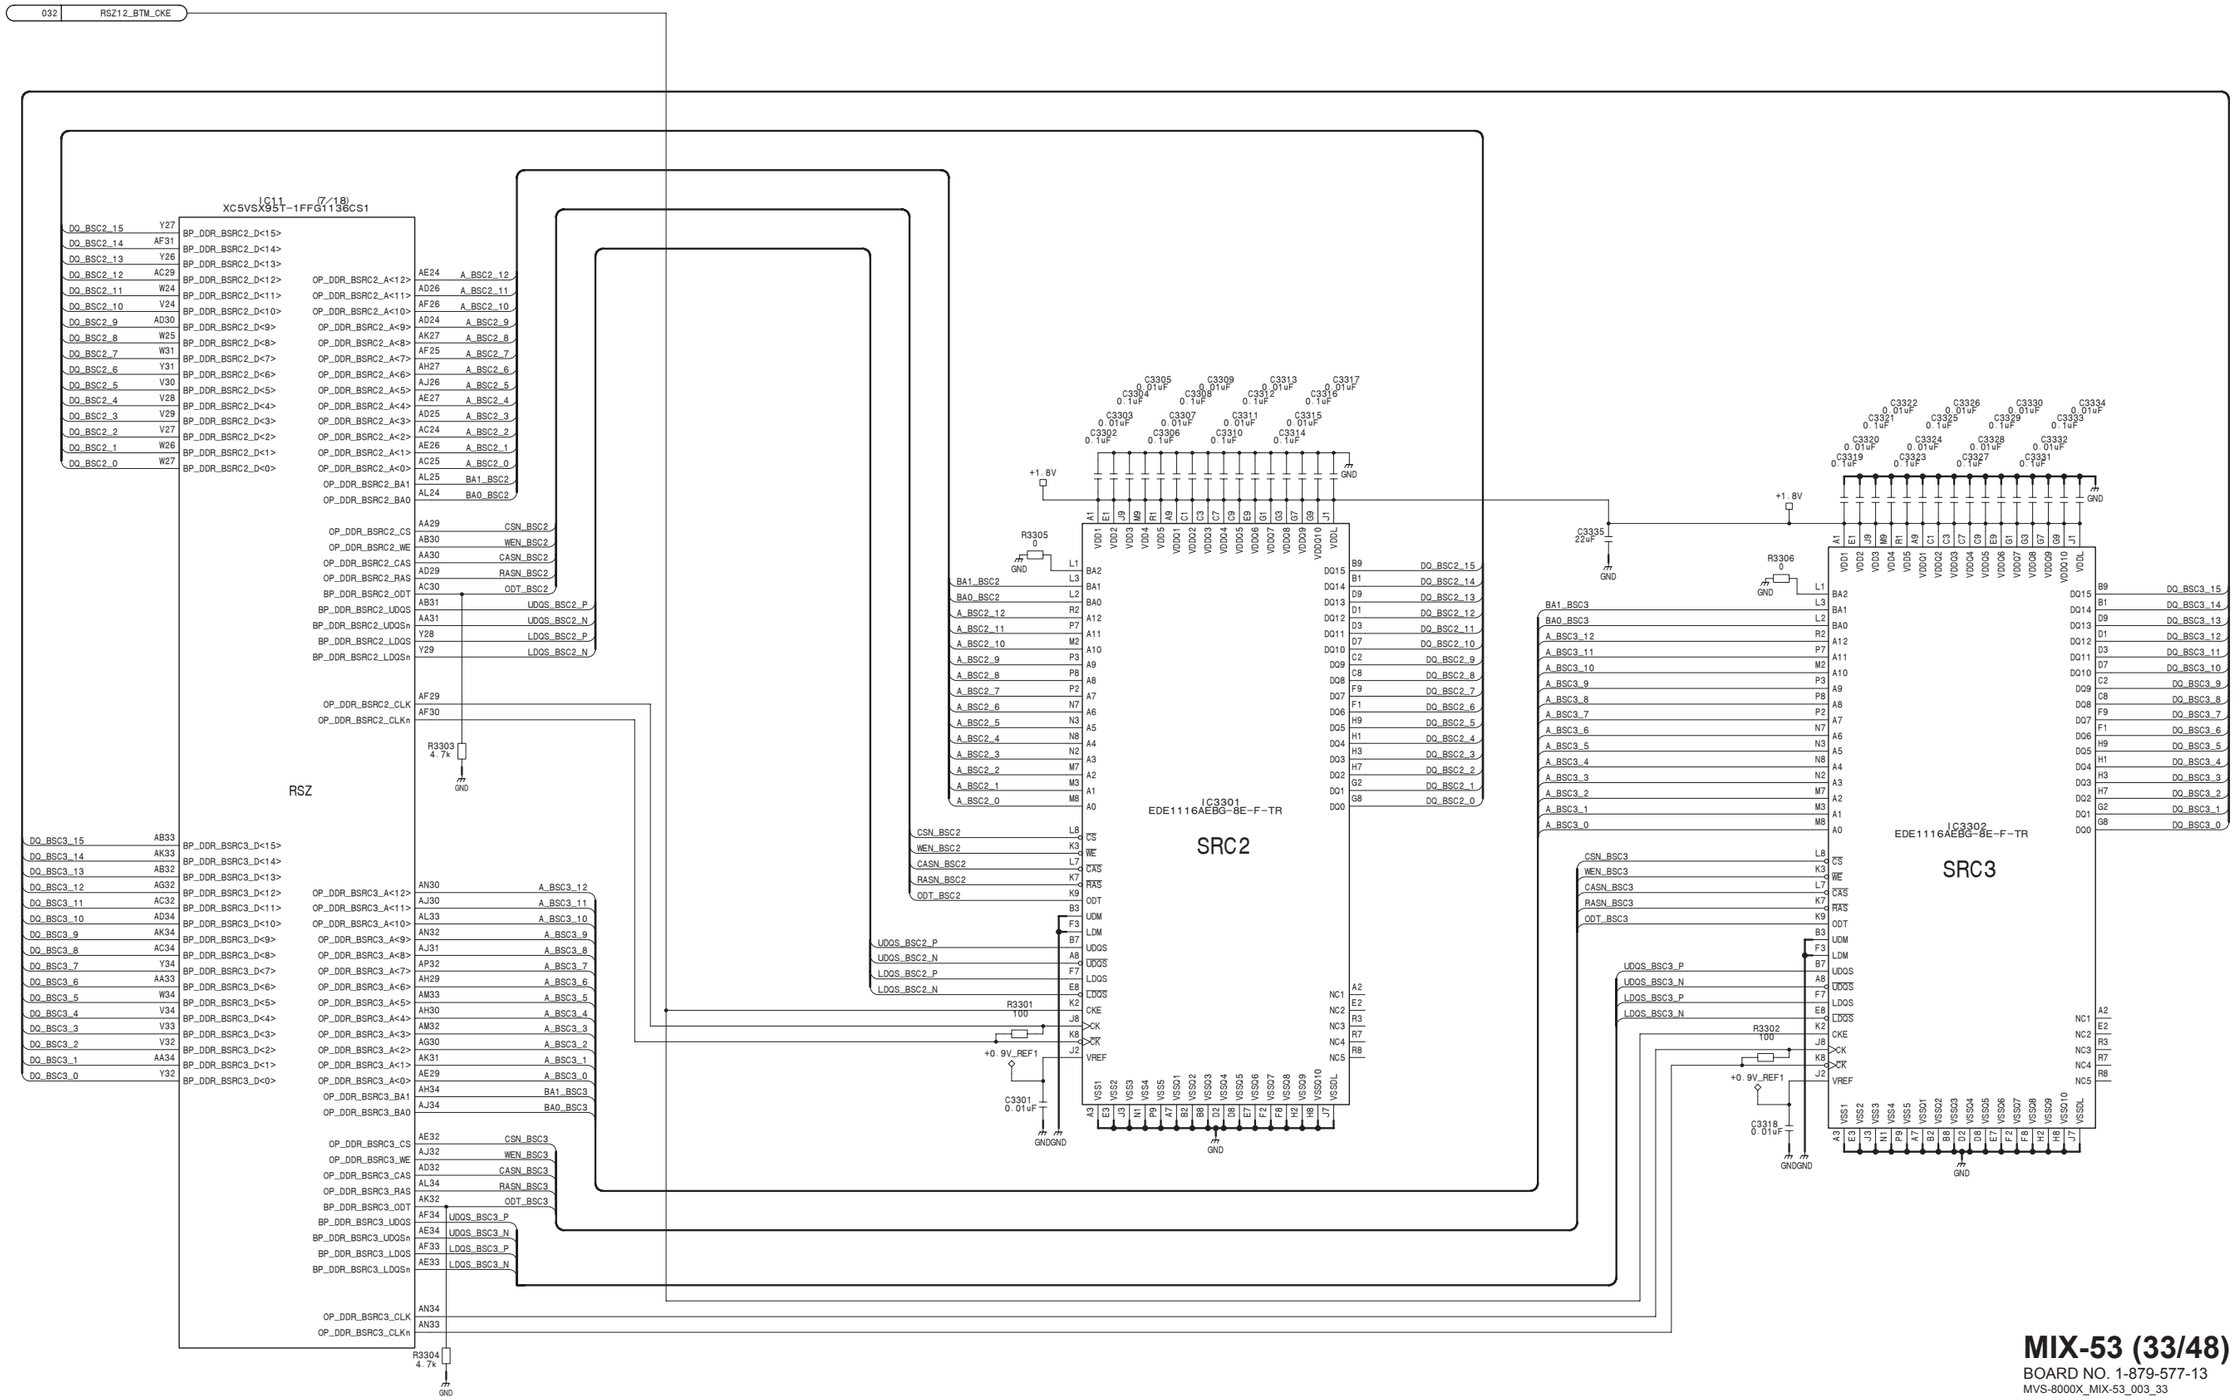

MIX-53 (33/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_33

RSZ34_TOP_CKE | 035

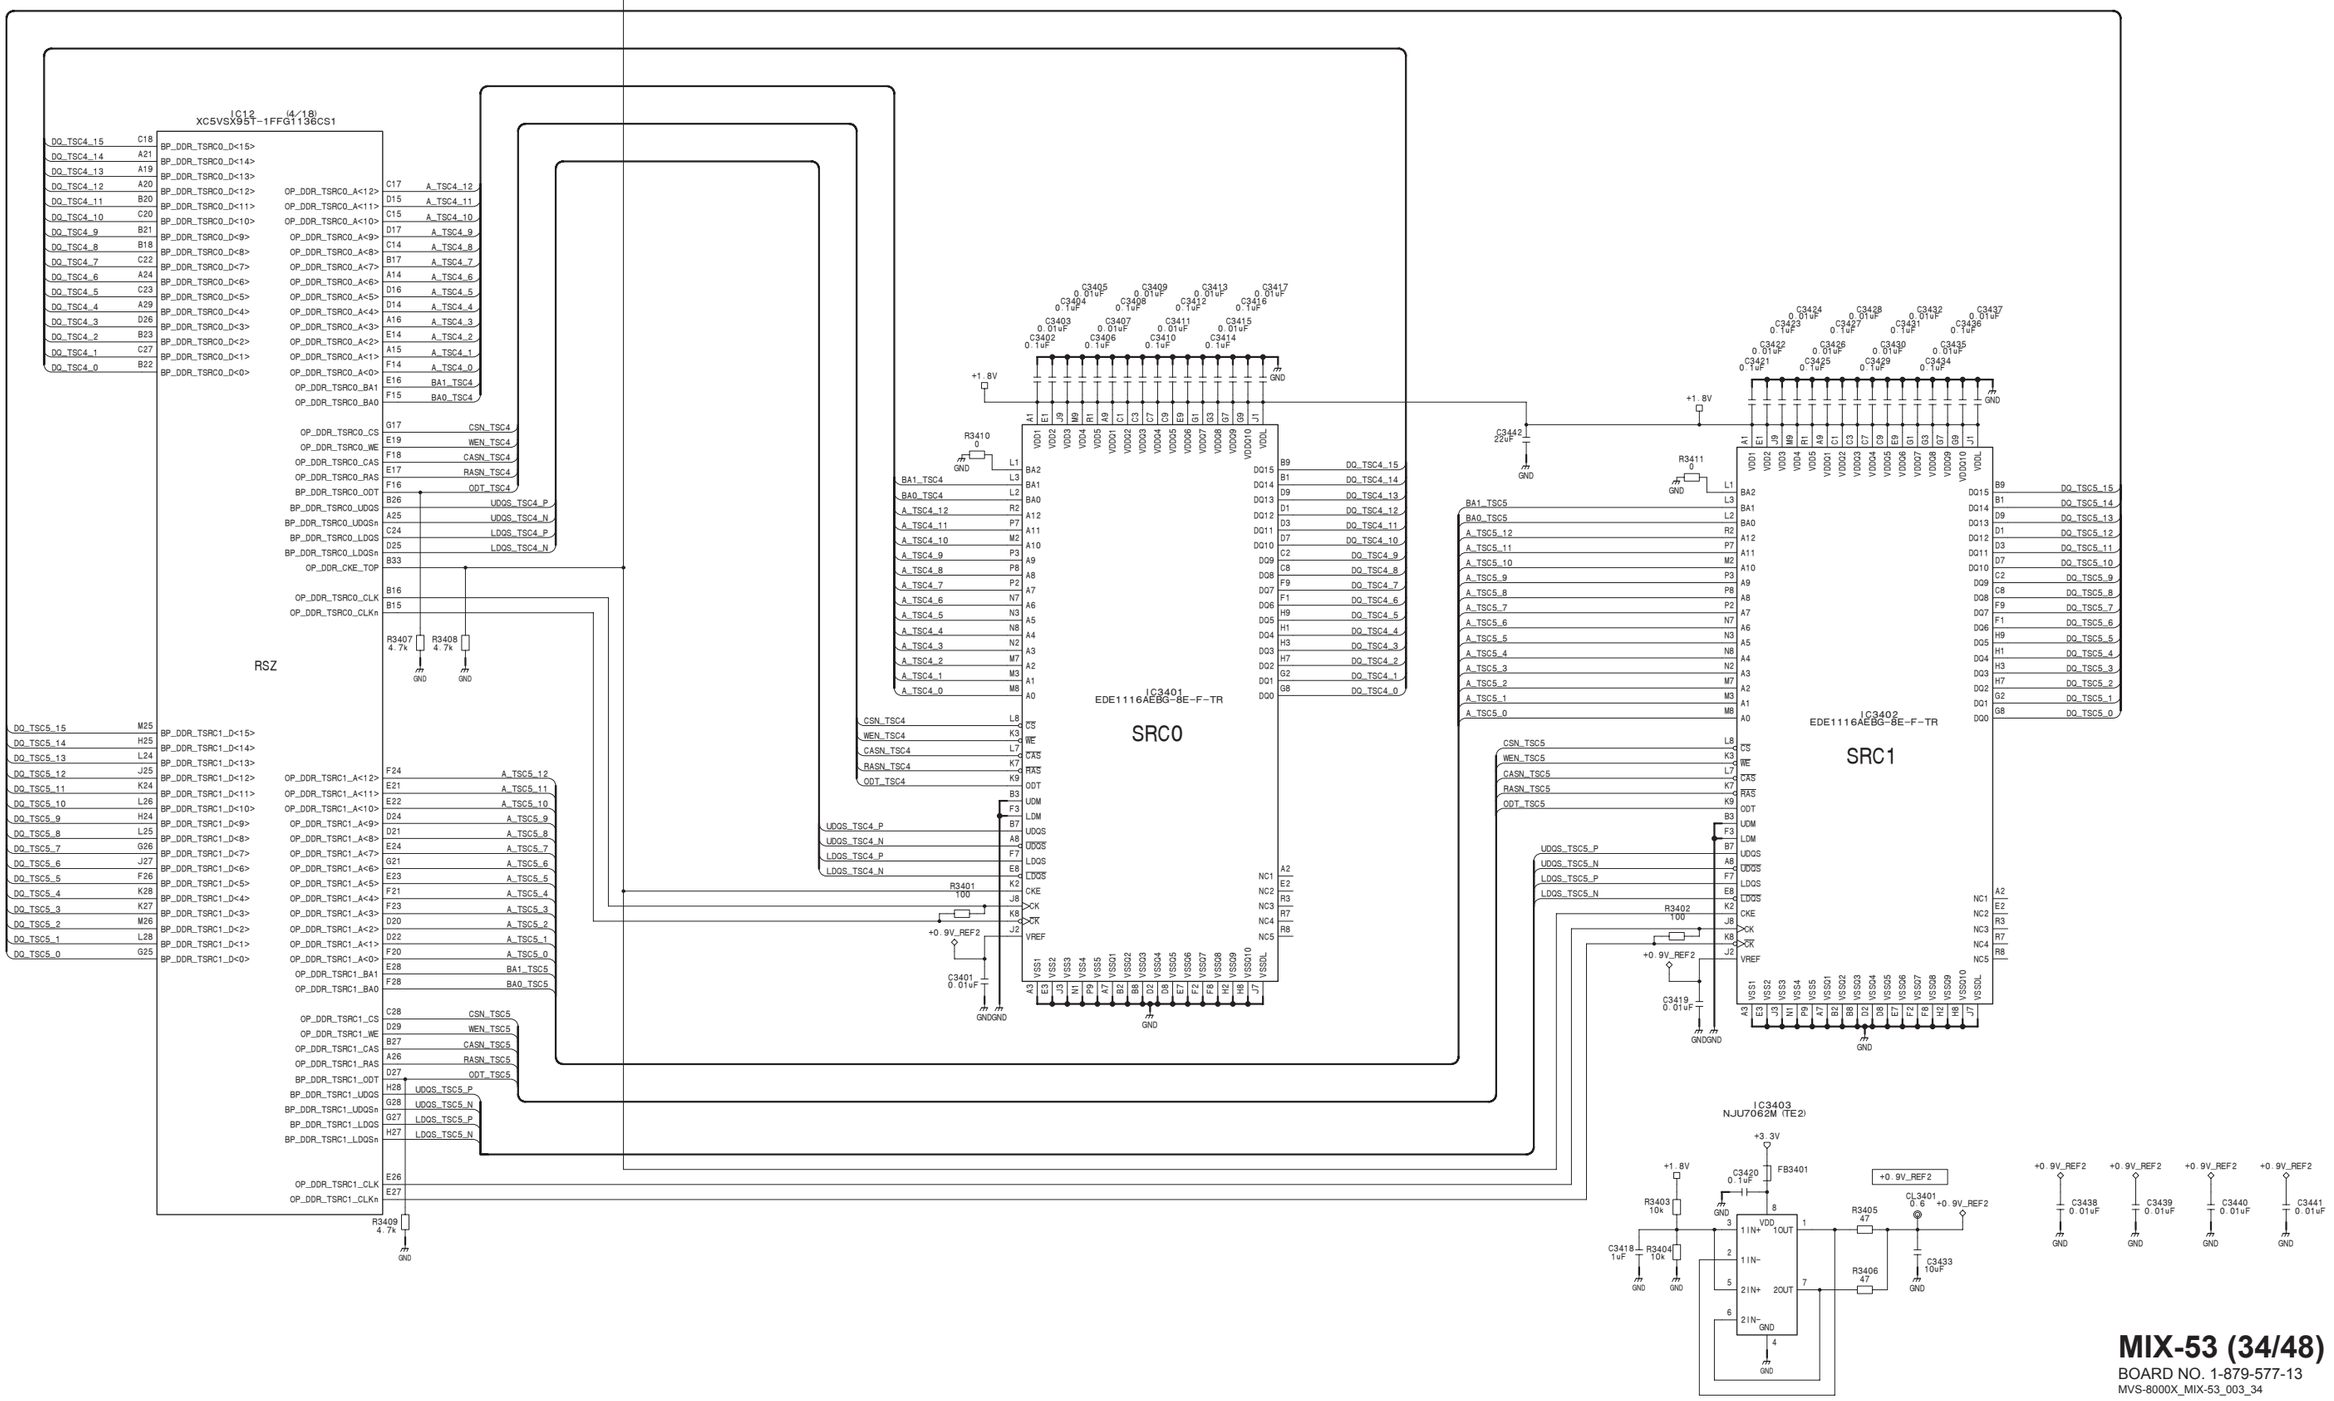

MIX-53 (34/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_34

MIX-53 (35/48)
SUFFIX: -13

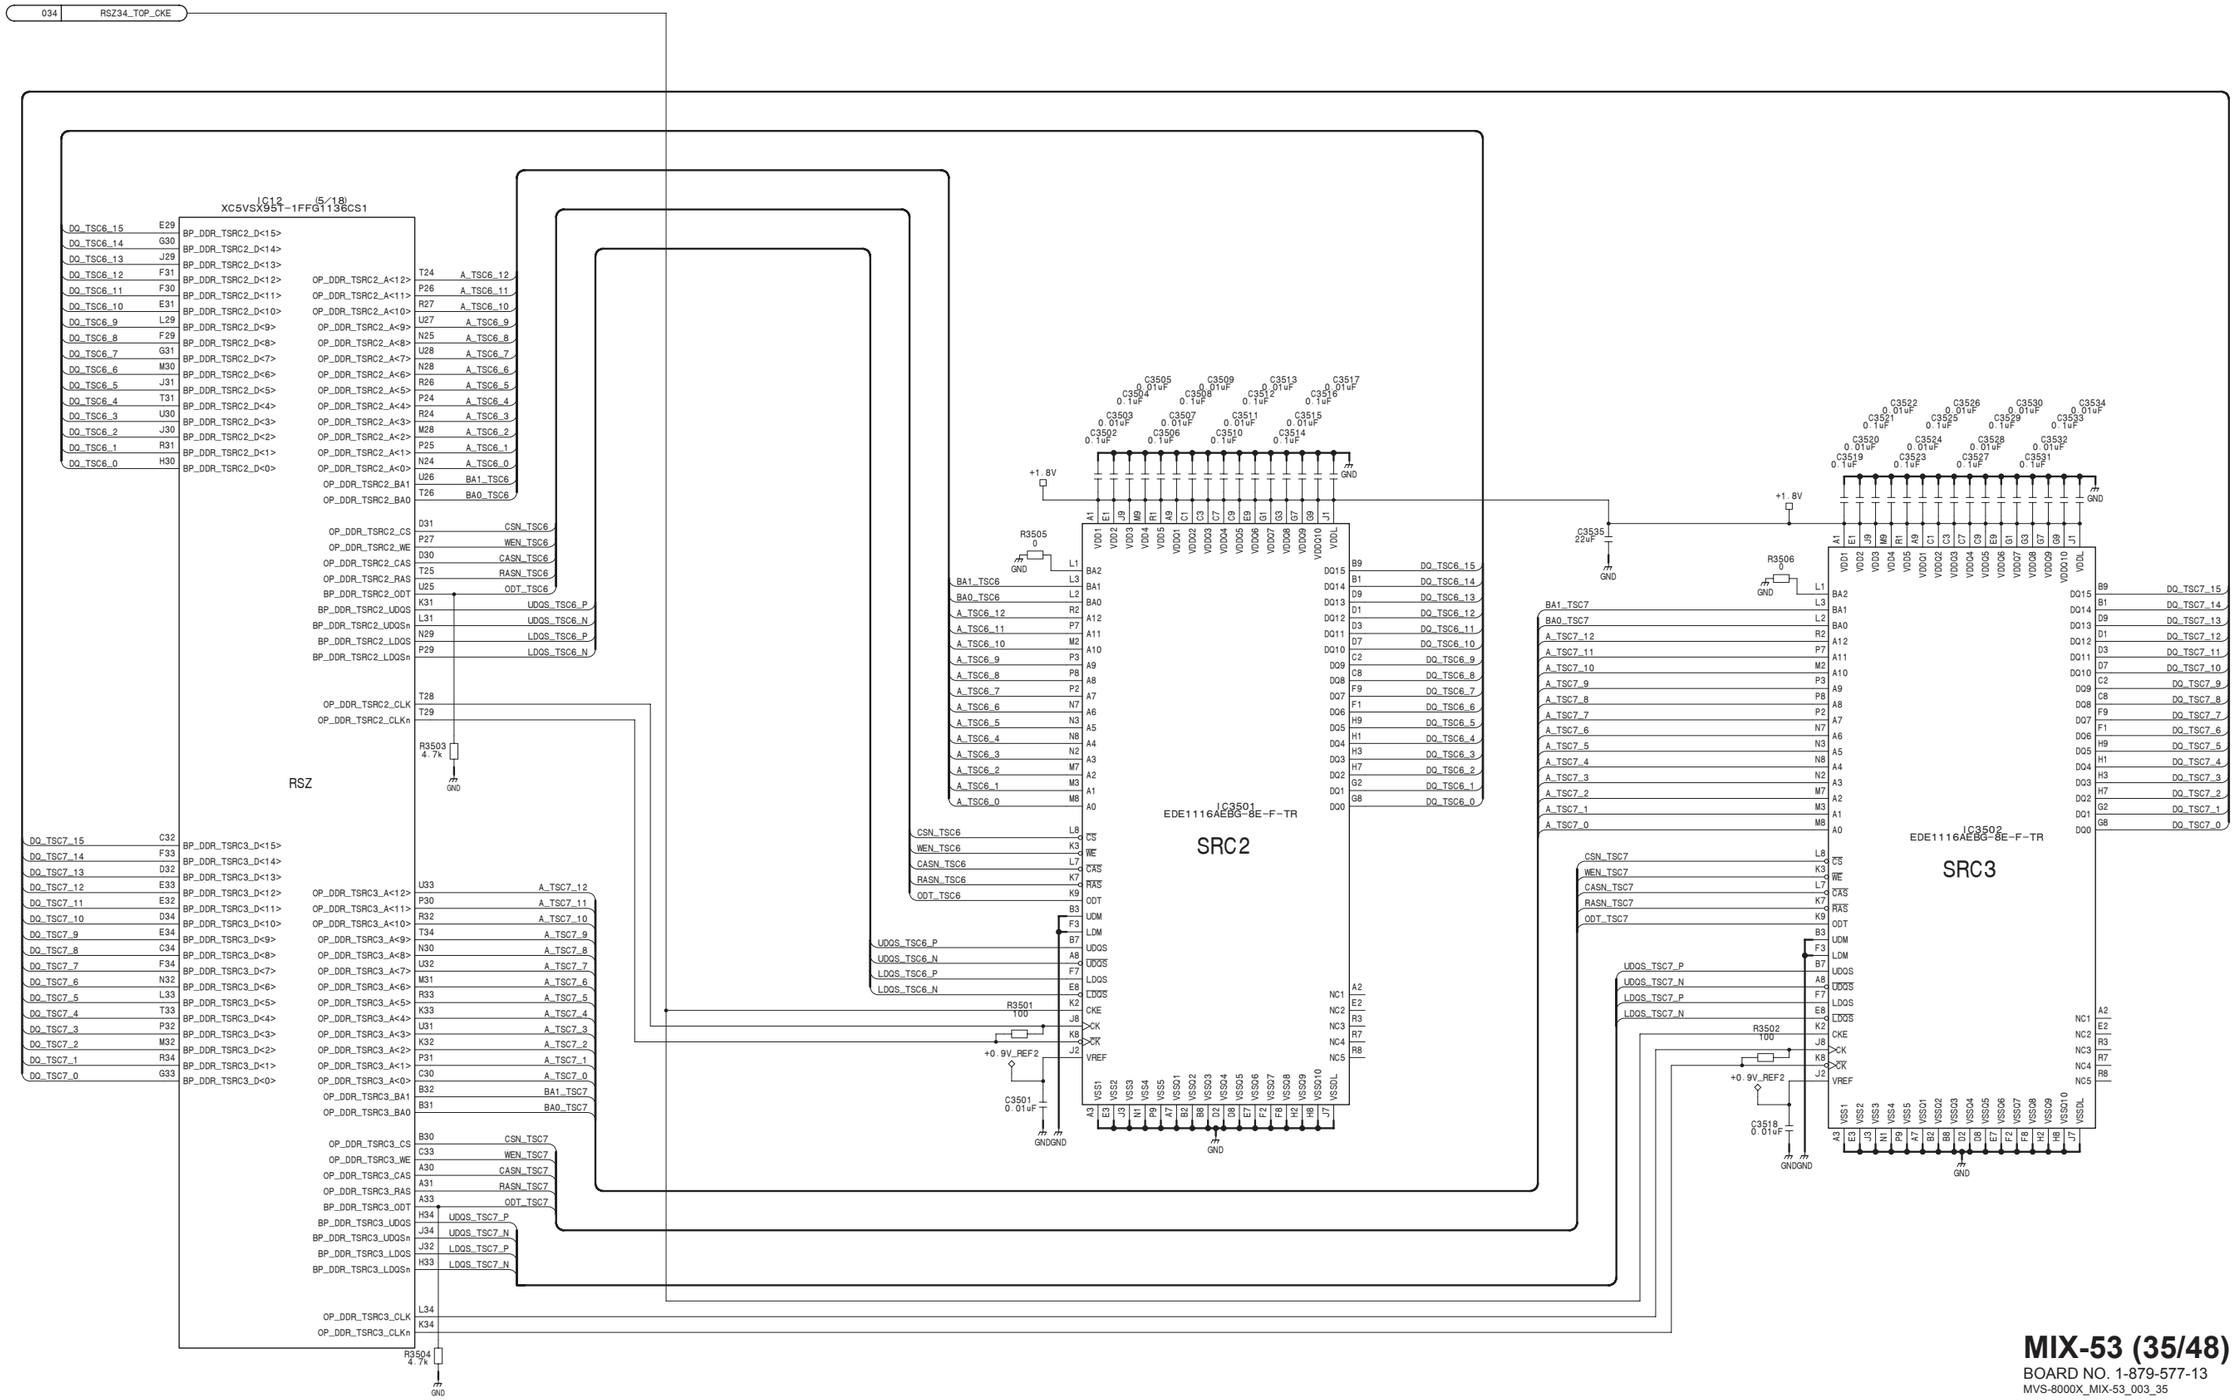

MIX-53 (35/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_35

RSZ34_BTM_CKE | 037

IC12 (6/18)
XC5VSX95T-1FFG1136CS1

RSZ

IC3601
EDE1116AEBG-8E-F-TR
SRC0

IC3602
EDE1116AEBG-8E-F-TR
SRC1

IC3603
NJU7062M (TE2)

MIX-53 (36/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_36

MIX-53 (37/48)
SUFFIX: -13

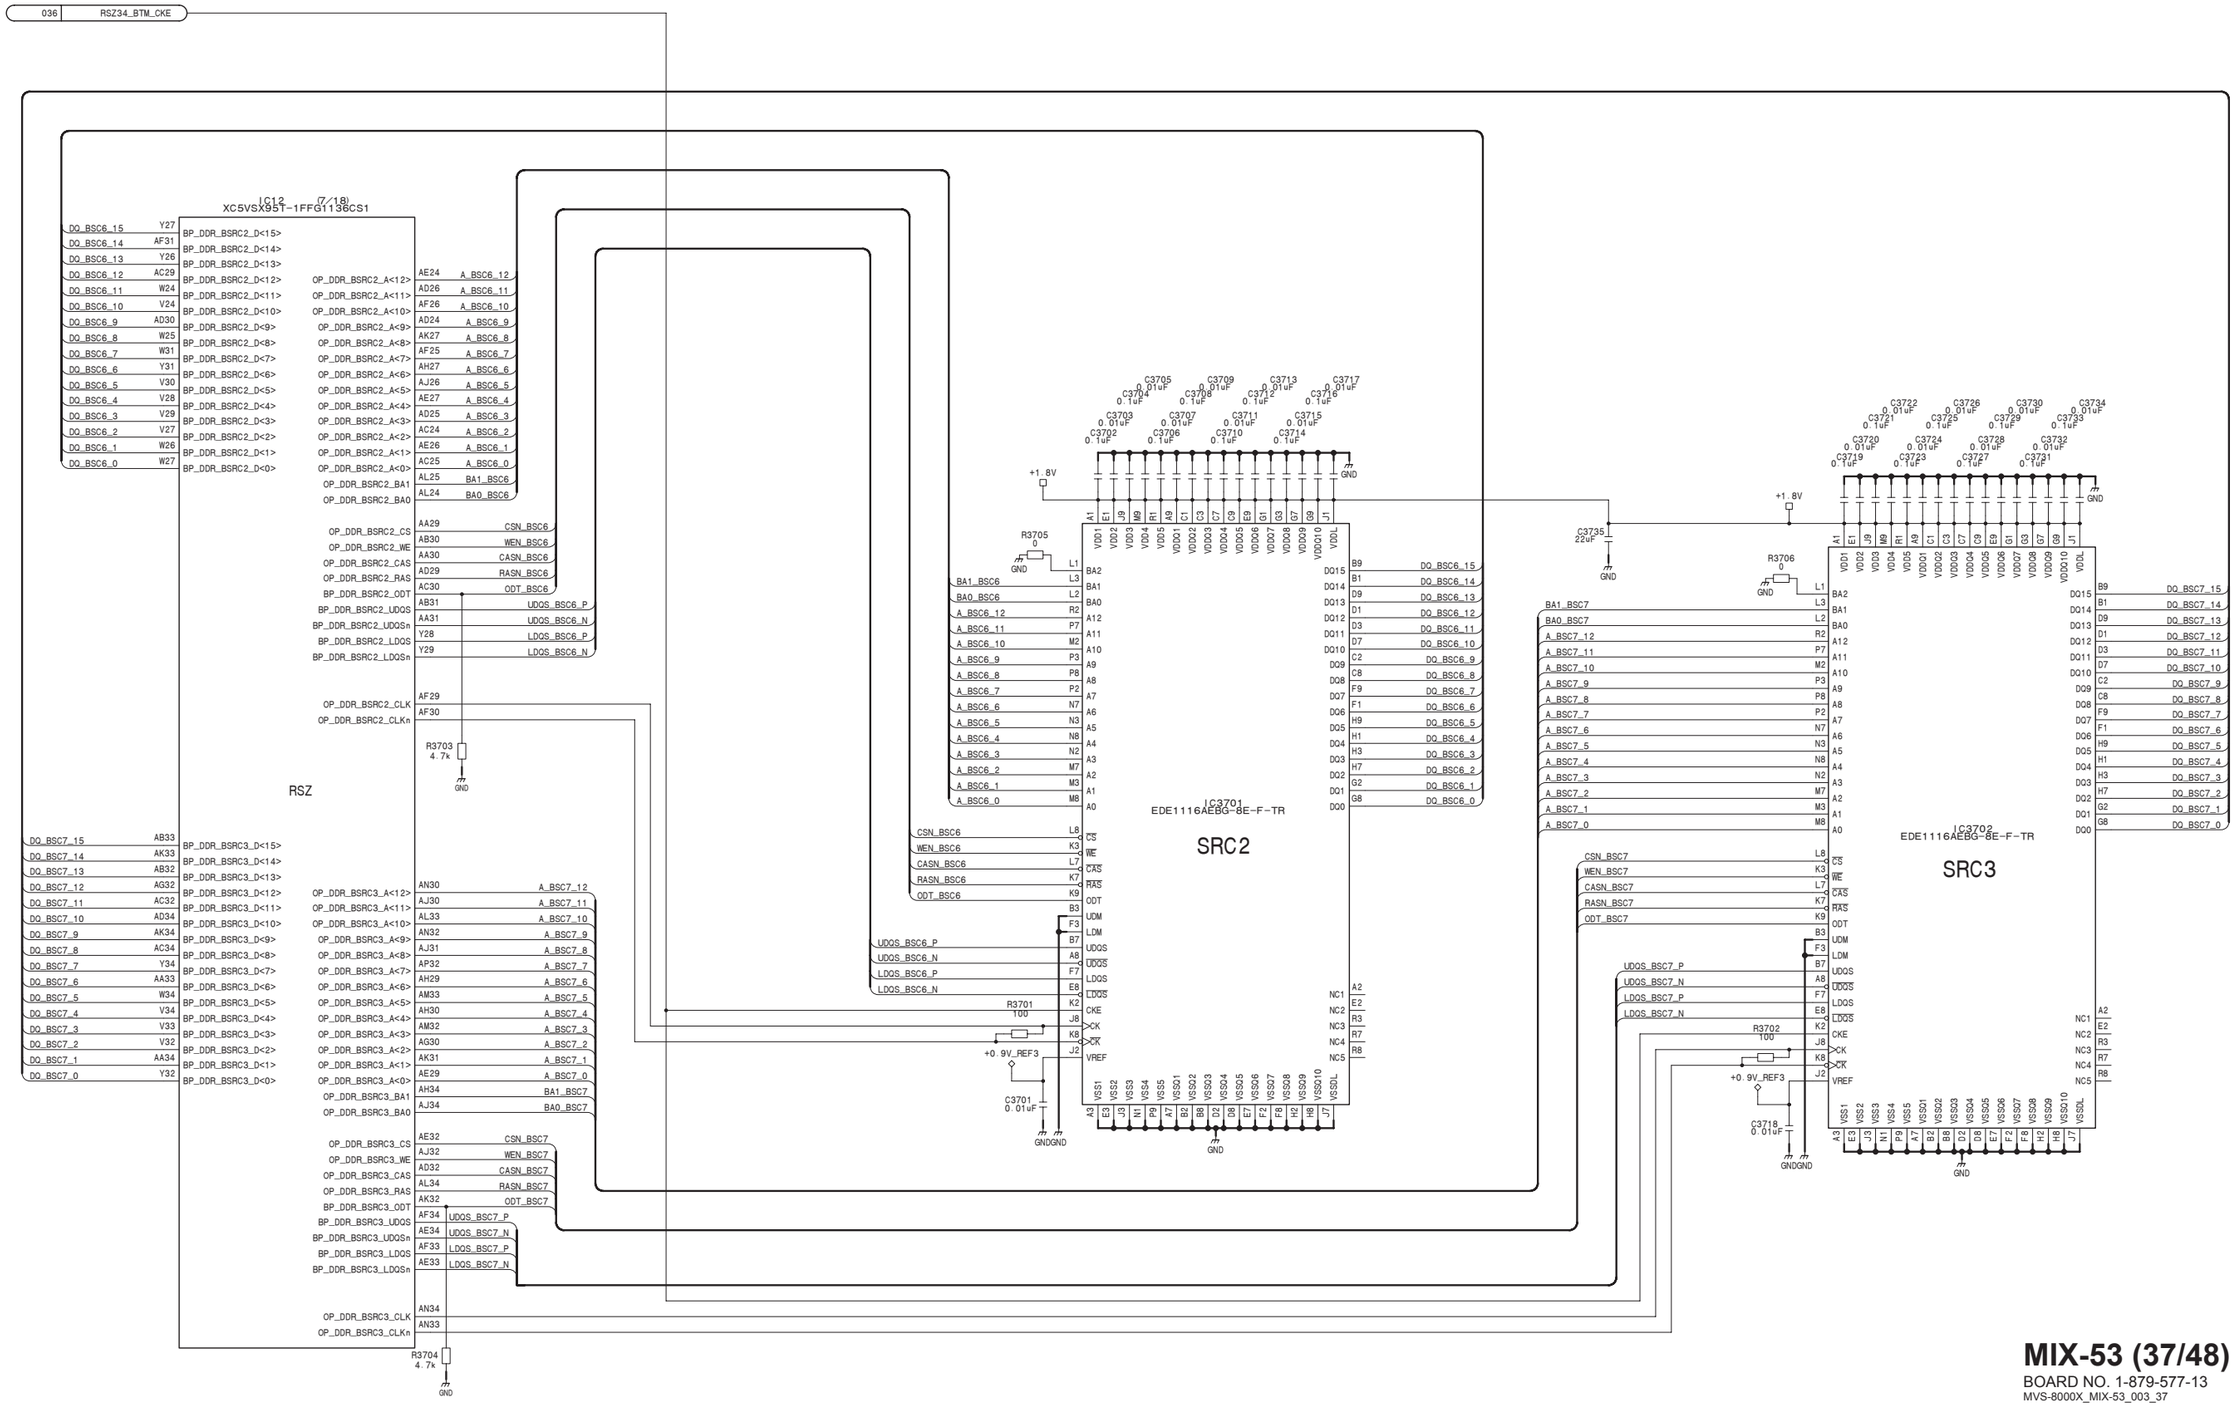

MIX-53 (37/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_37

MIX-53 (38/48)
SUFFIX: -13

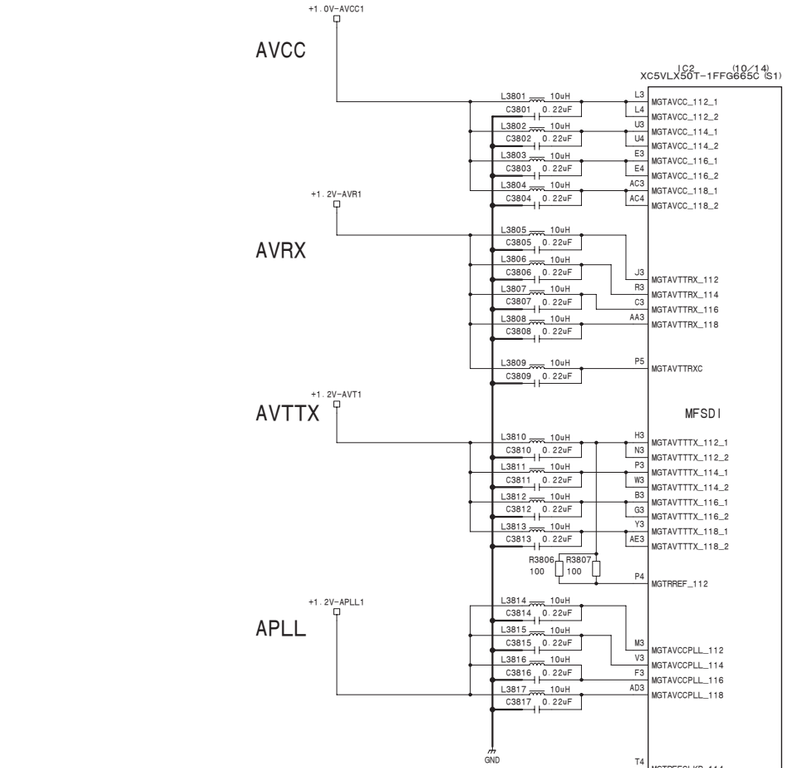

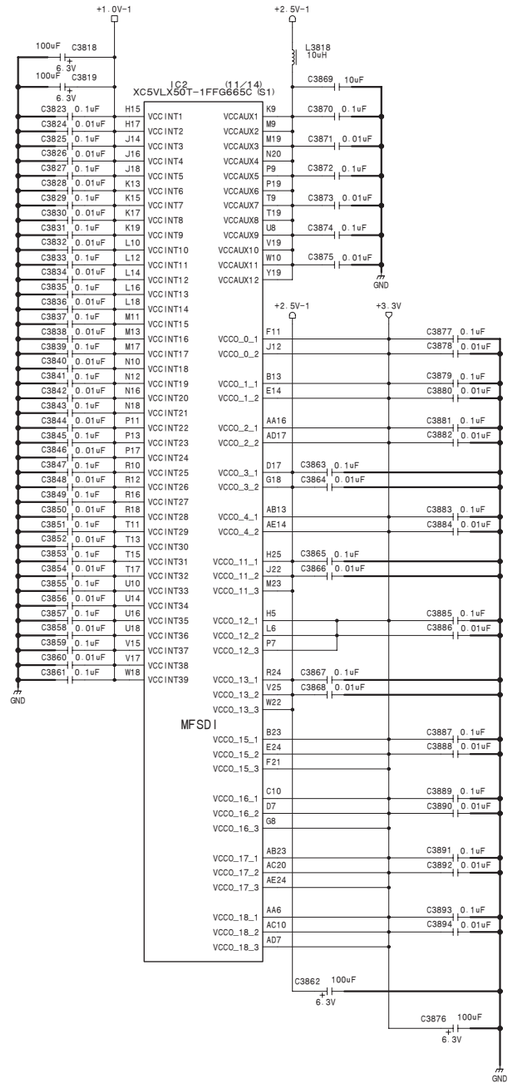

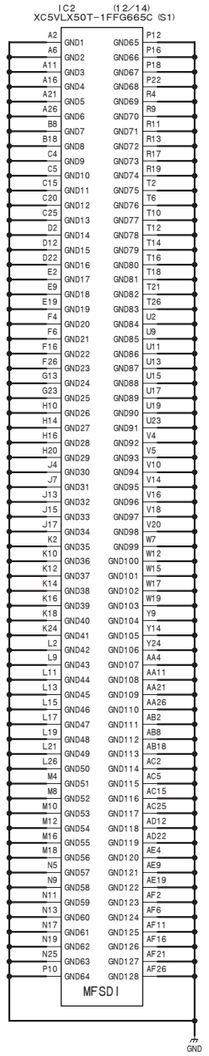

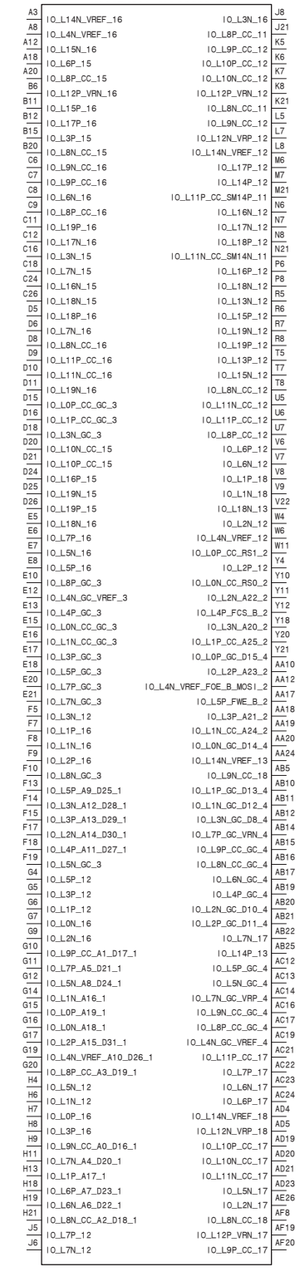

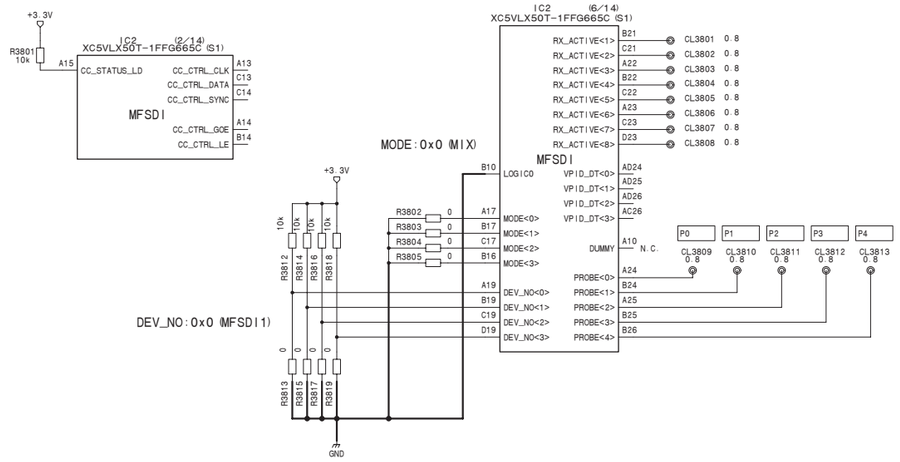



4-224

MIX-53 (38/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_38

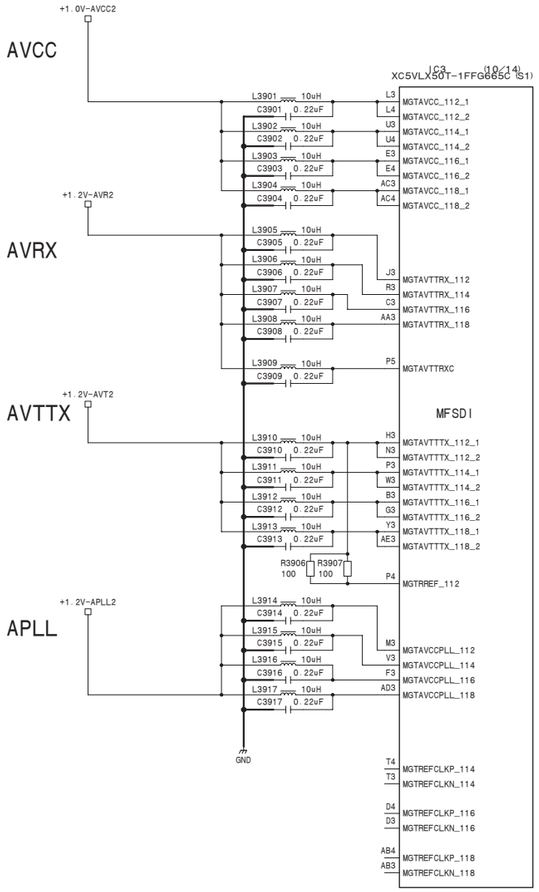

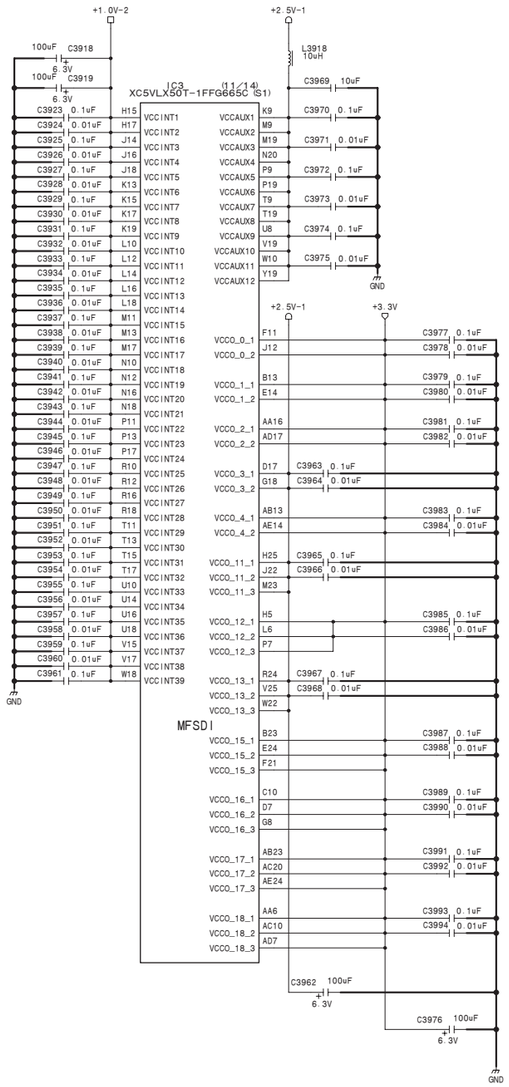

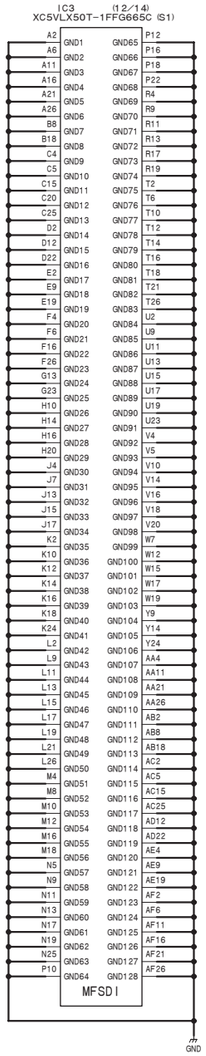

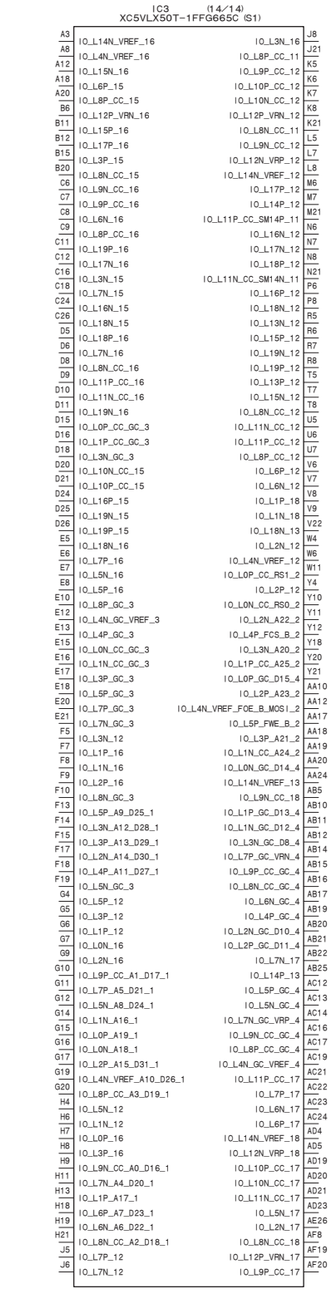

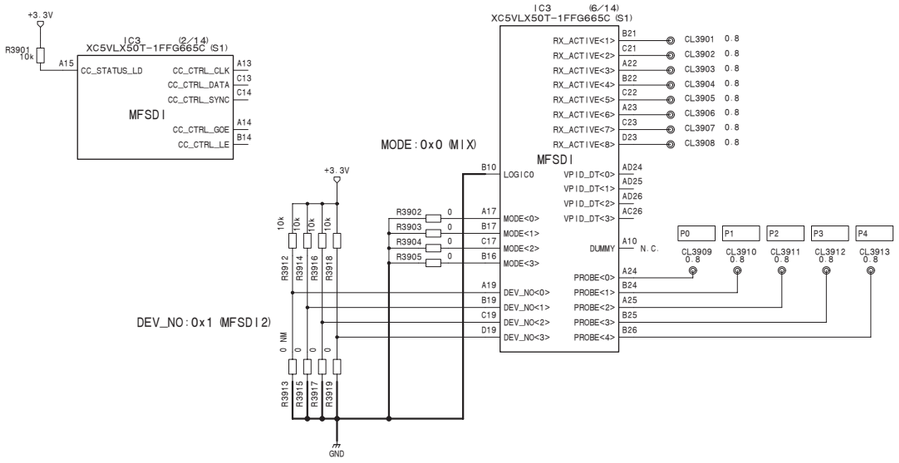



MIX-53 (39/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_39

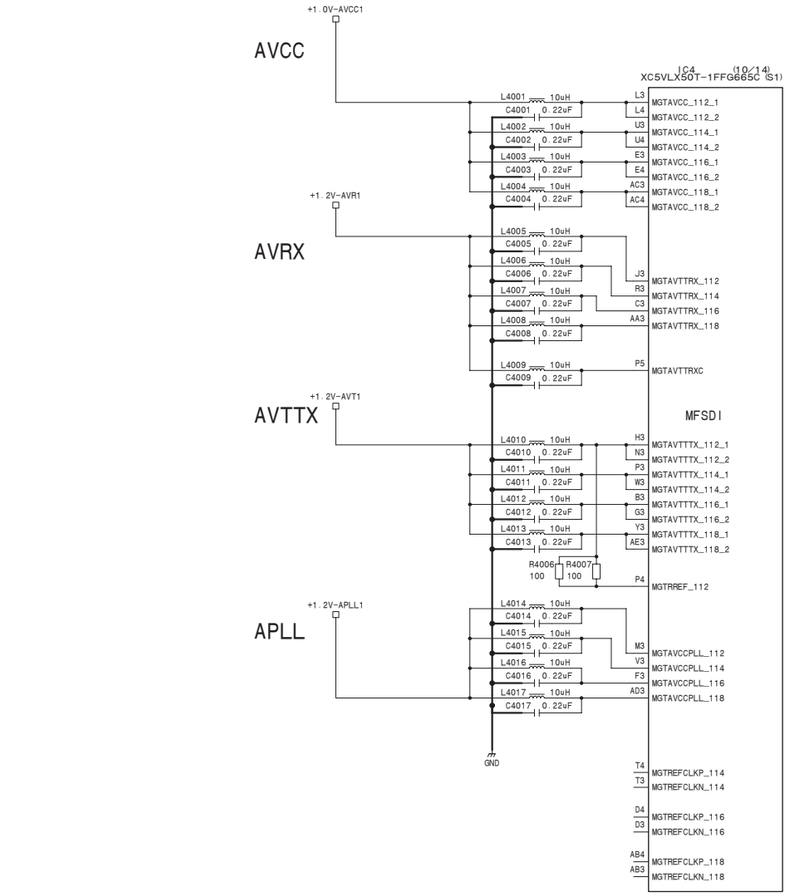

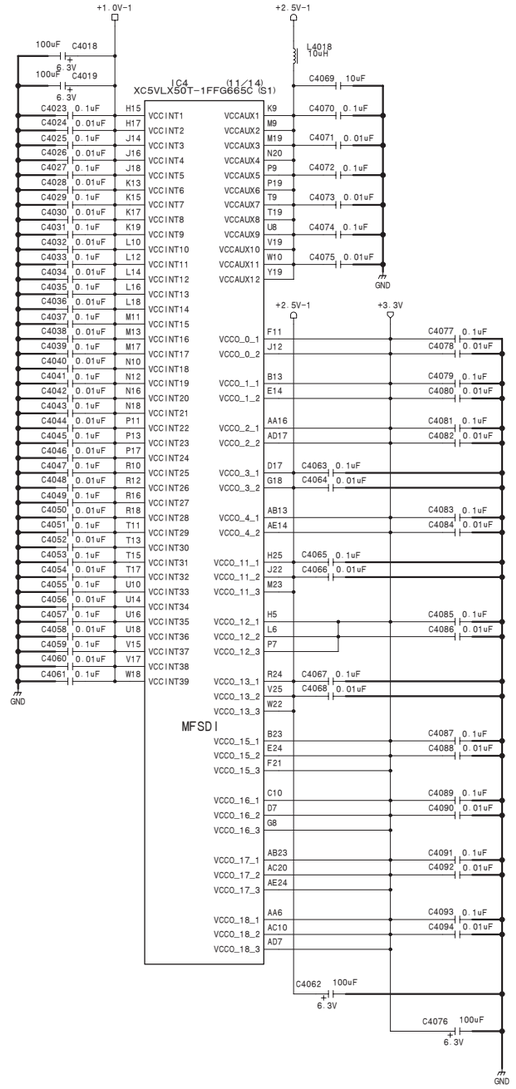

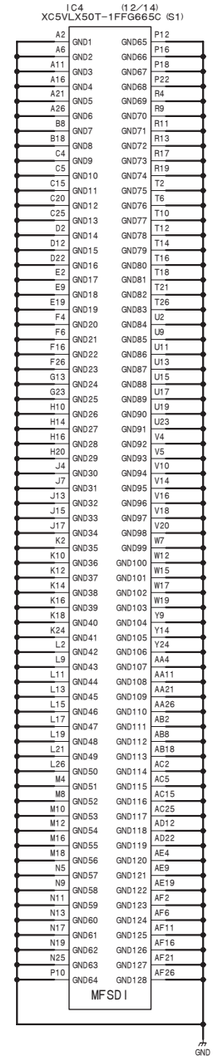

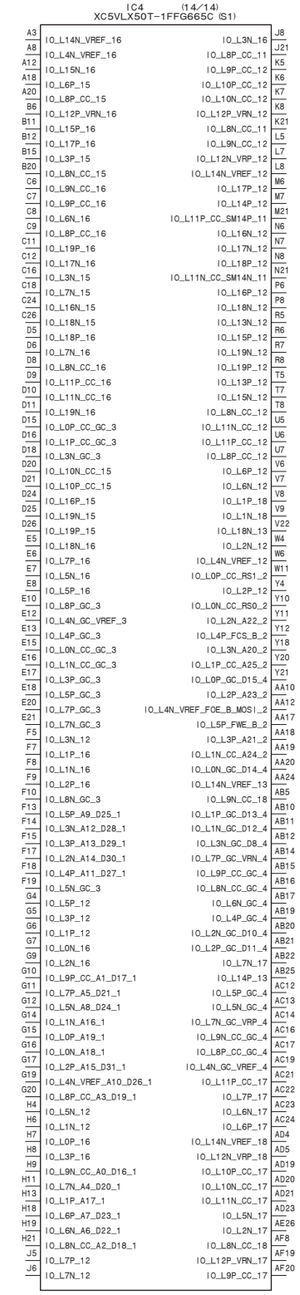



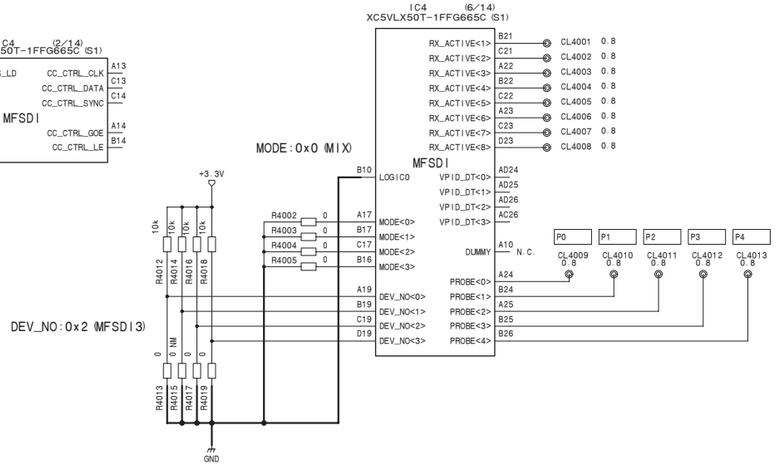



MIX-53 (40/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_40

MIX-53 (41/48) **SUFFIX: -13**

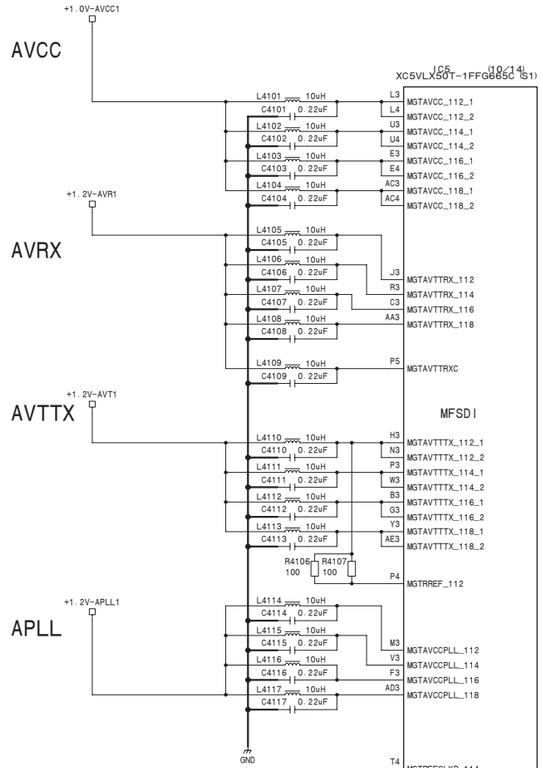

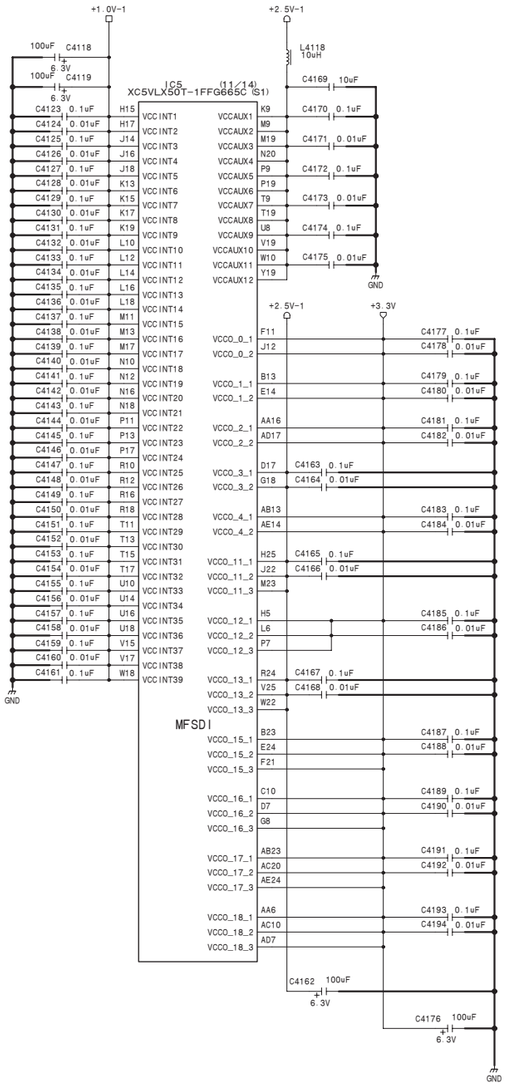

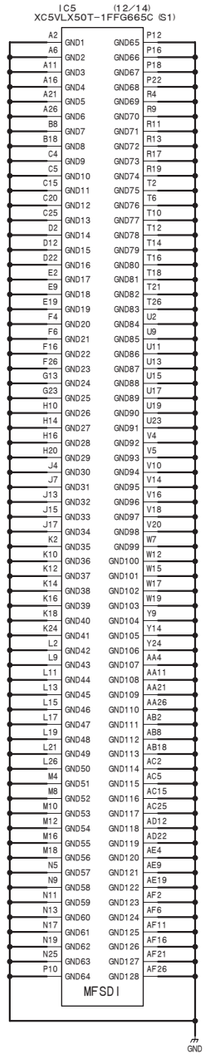

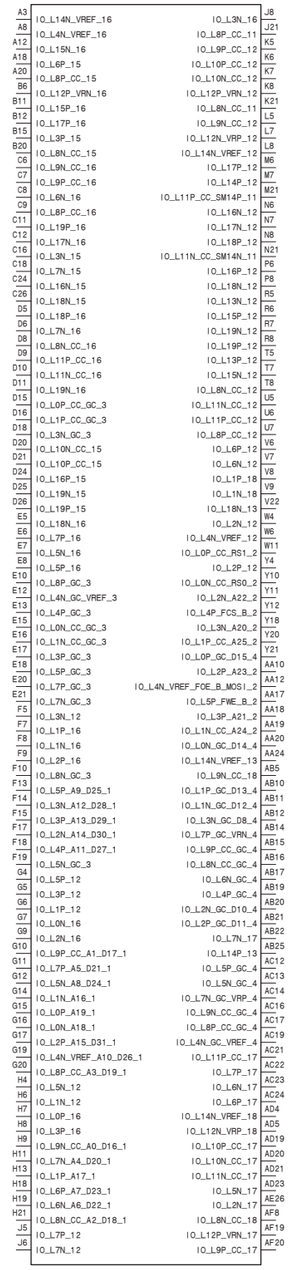



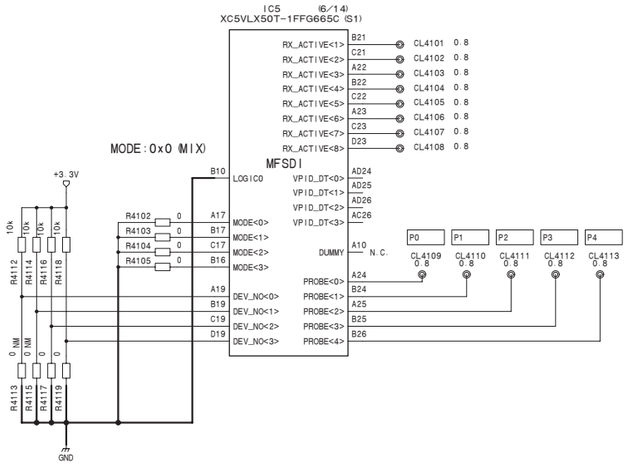



MIX-53 (41/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_41

MIX-53 (42/48)
SUFFIX: -13

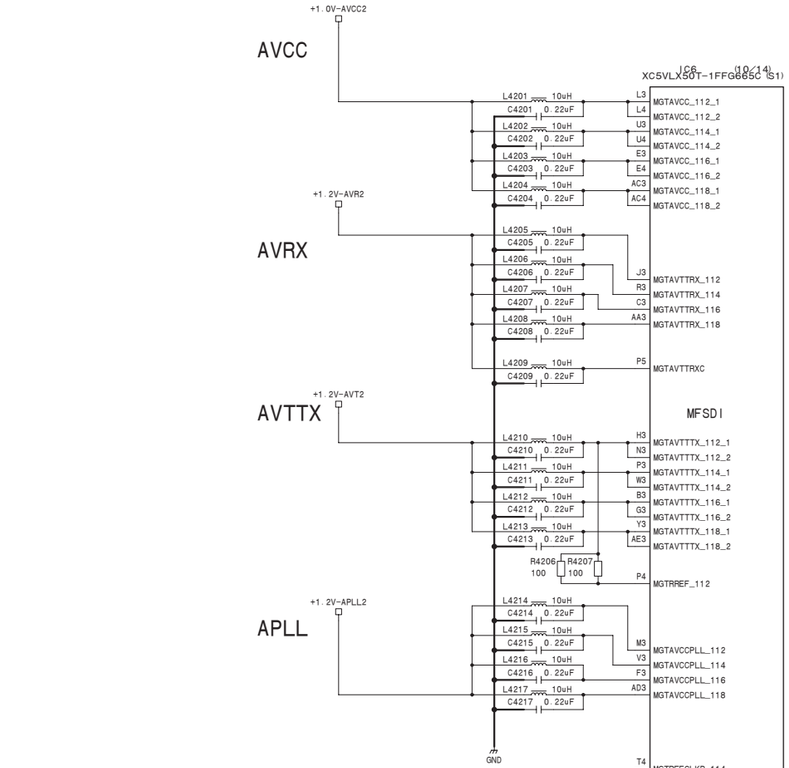

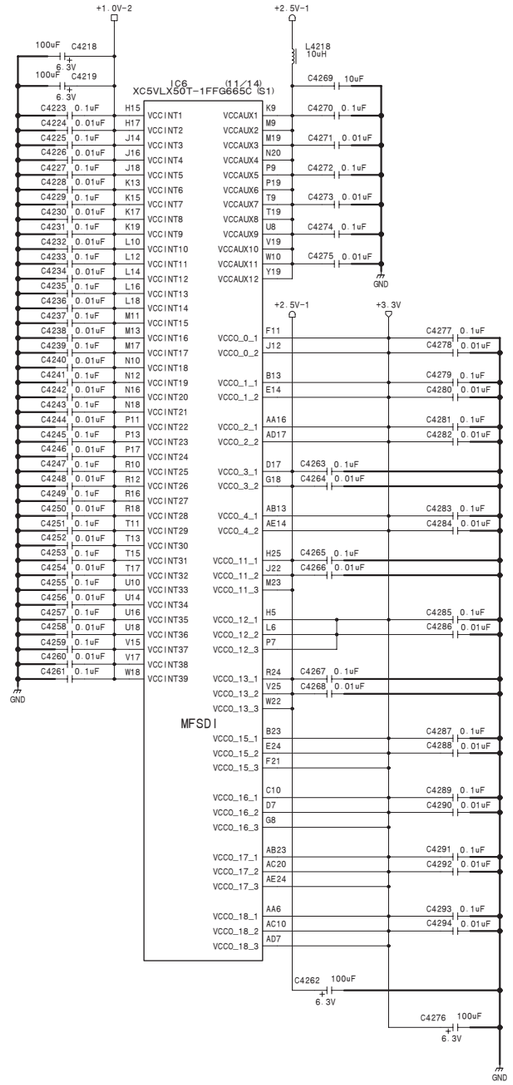

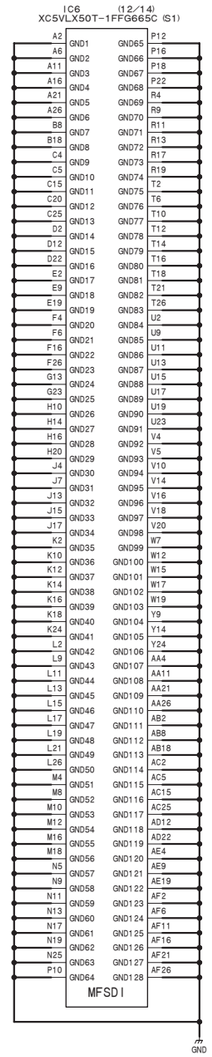

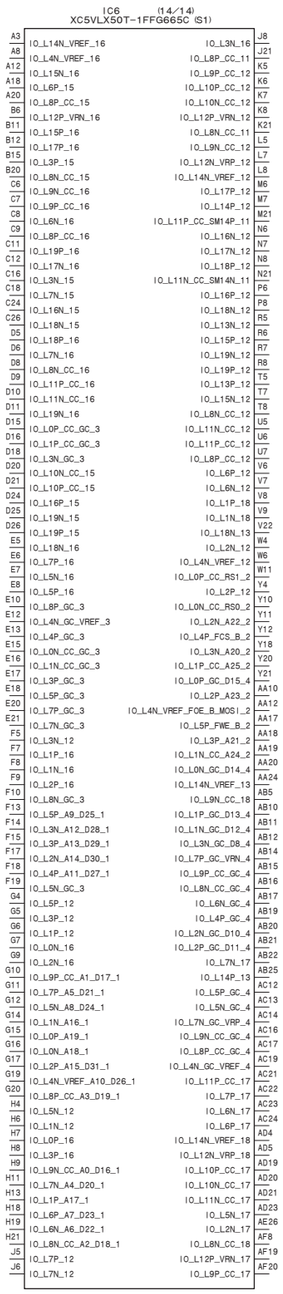

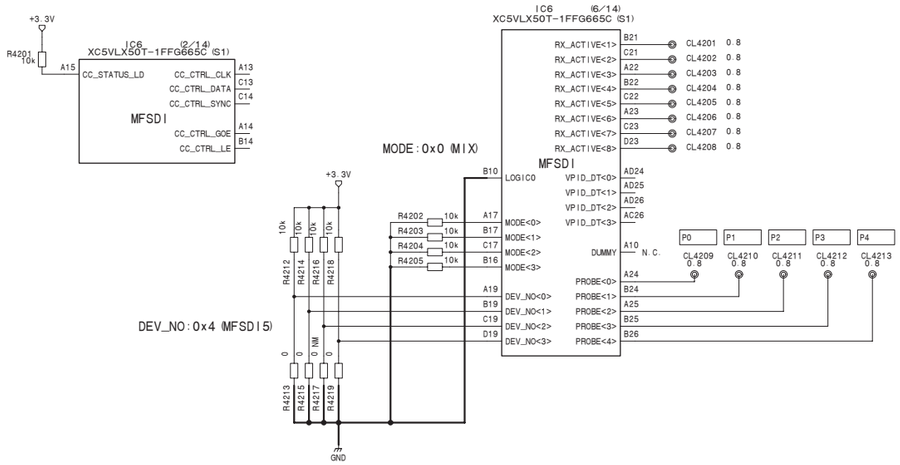



4-228

MIX-53 (42/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_42

MIX-53 (43/48)
SUFFIX: -13

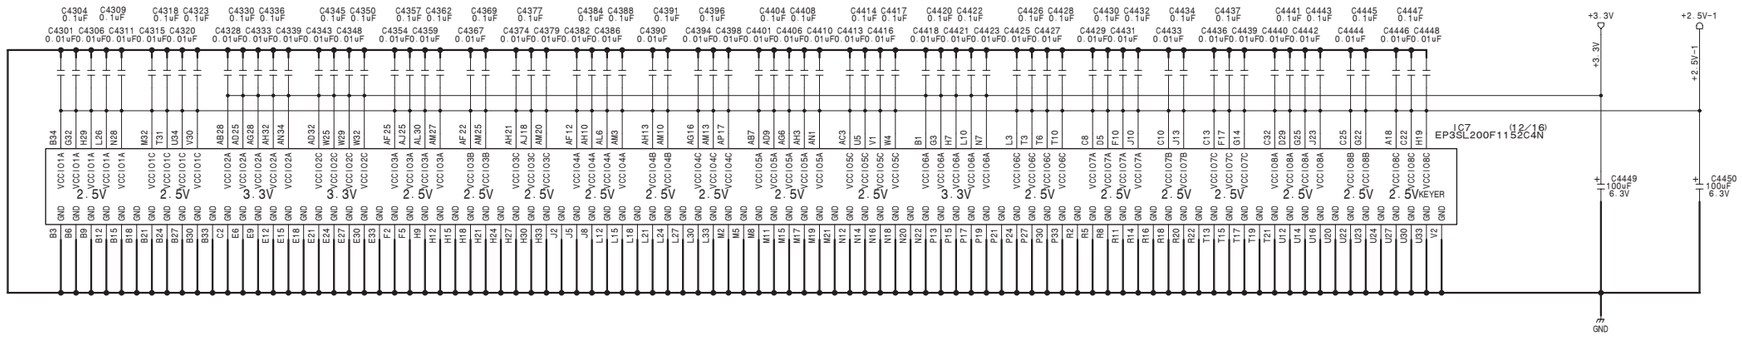

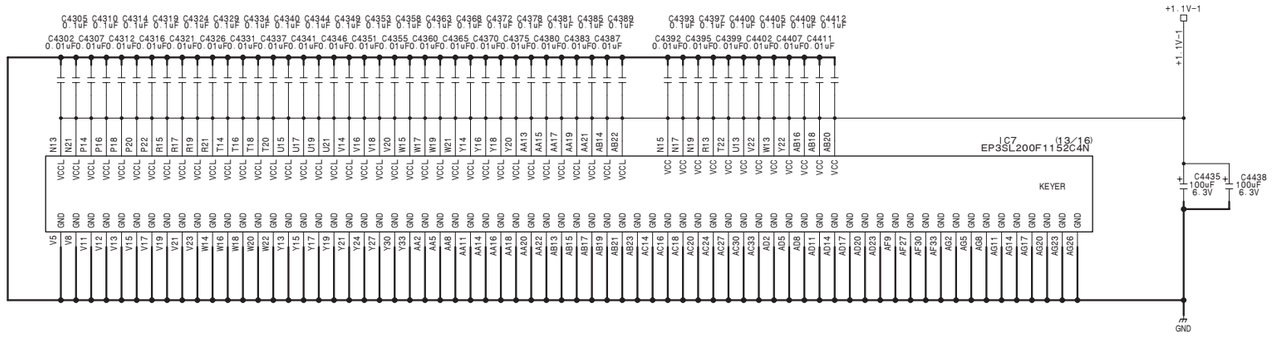

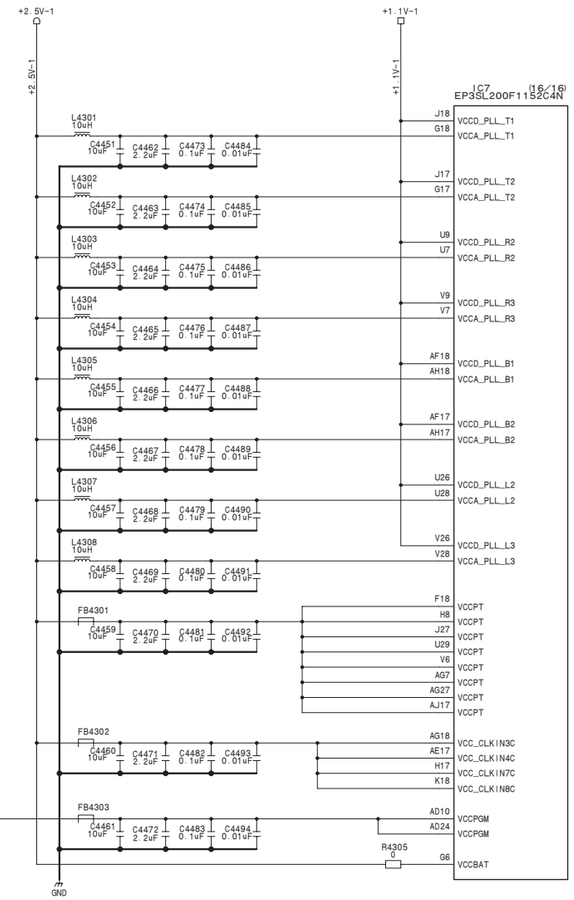

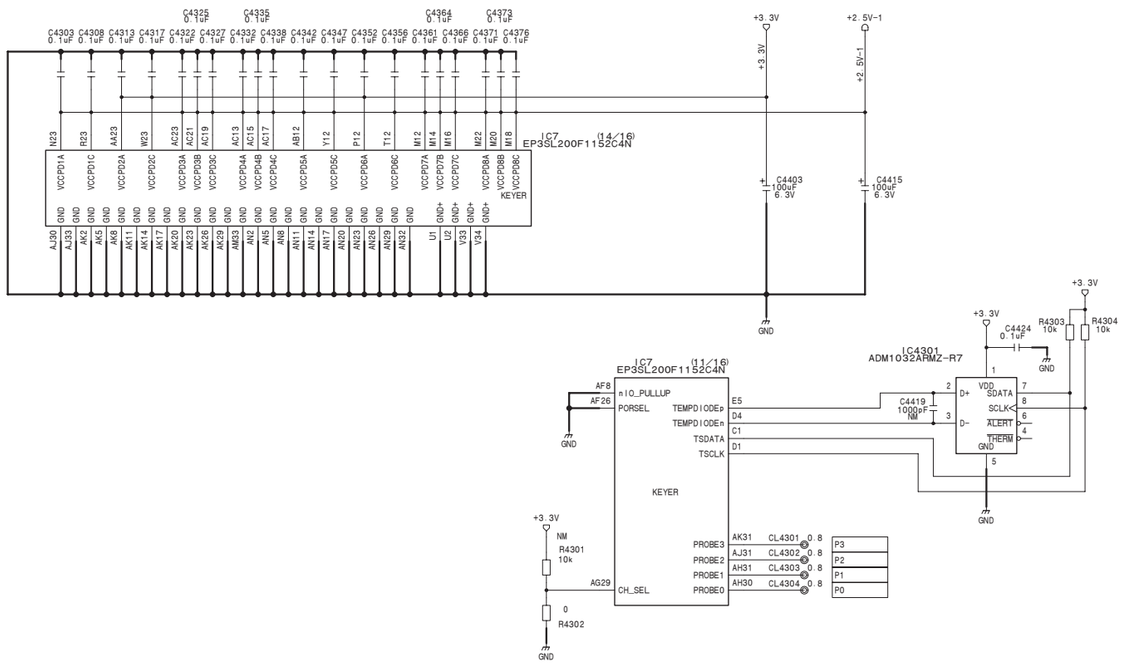

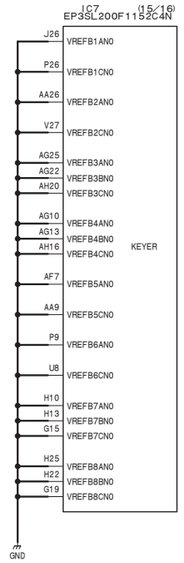

MIX-53 (43/48)
BOARD NO. 1-879-577-13
MVS-8000X_MIX-53_003_43

MIX-53 (44/48)
SUFFIX: -13

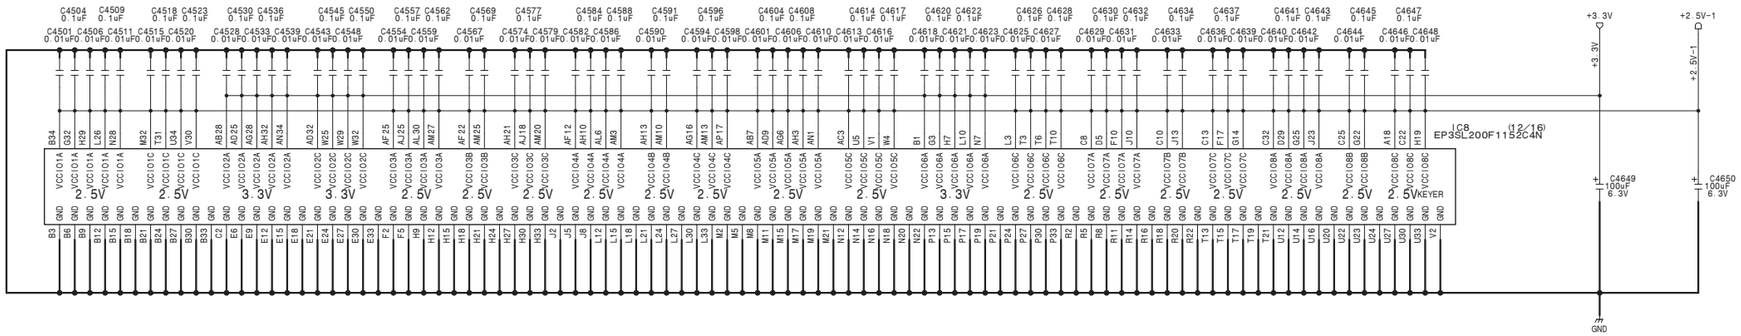

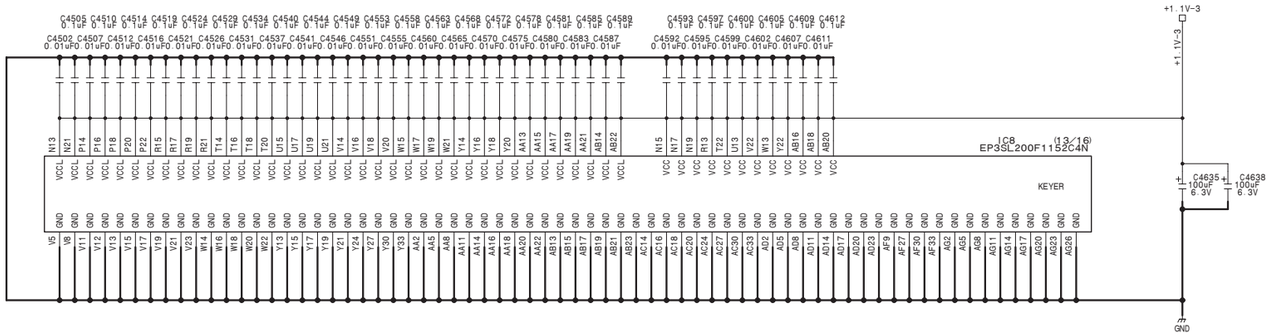

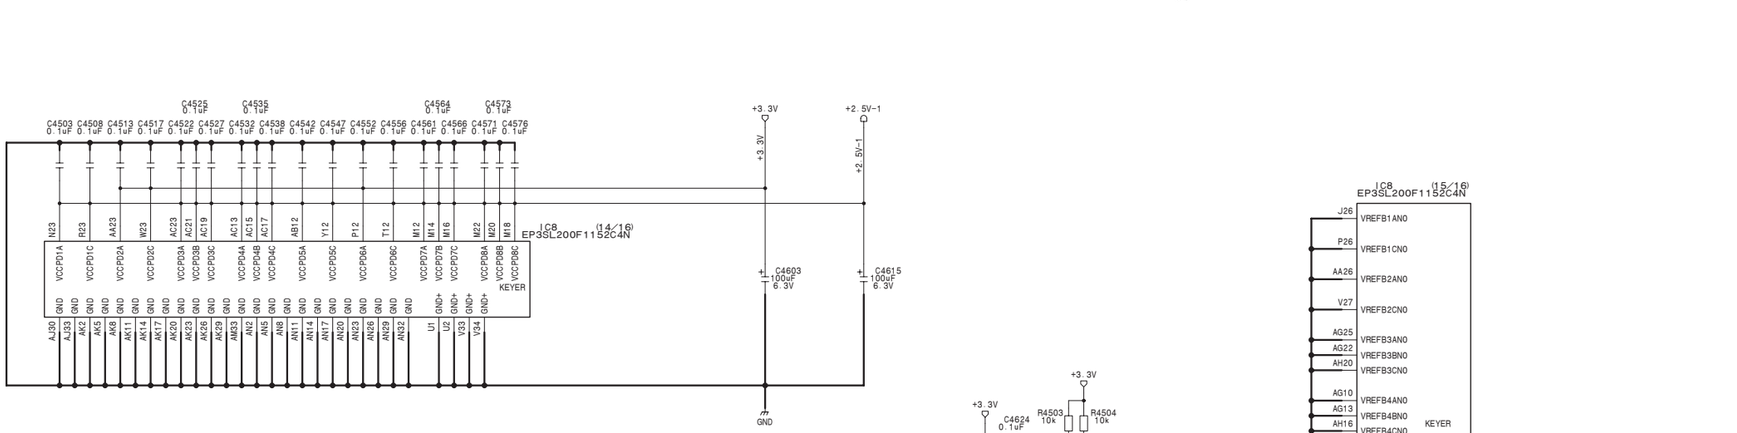

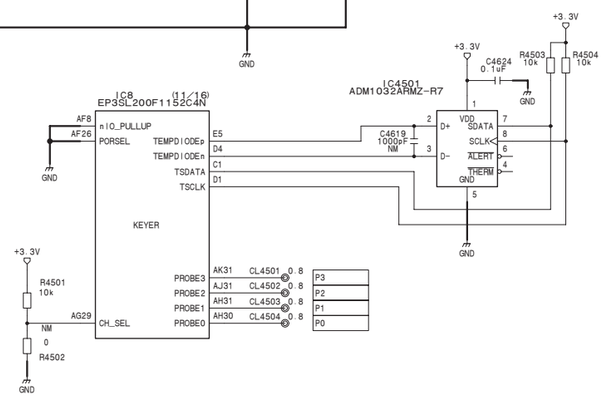

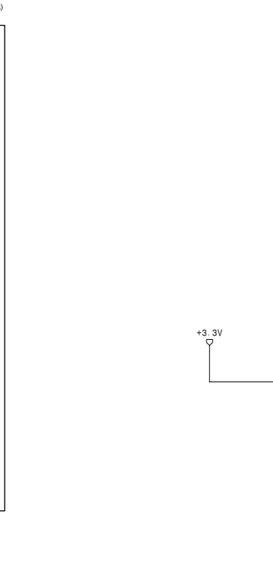

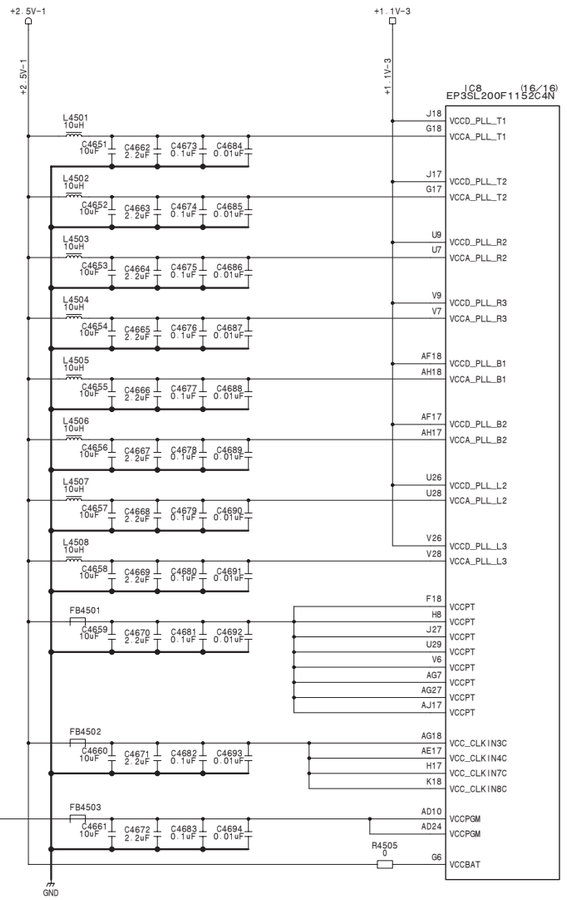

MIX-53 (44/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_44

MIX-53 (45/48)
SUFFIX: -13

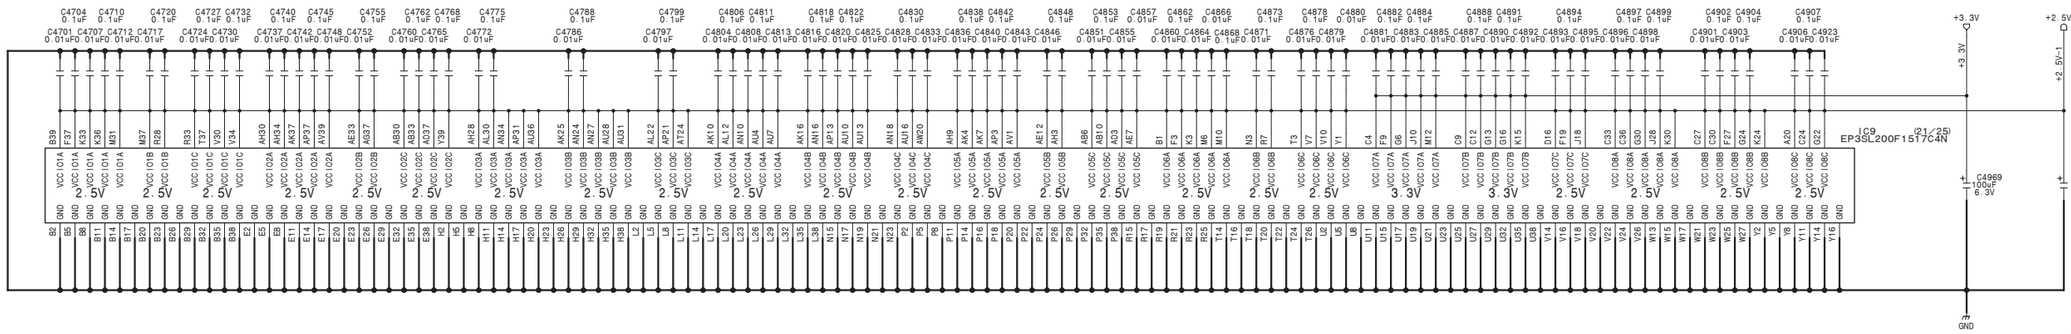

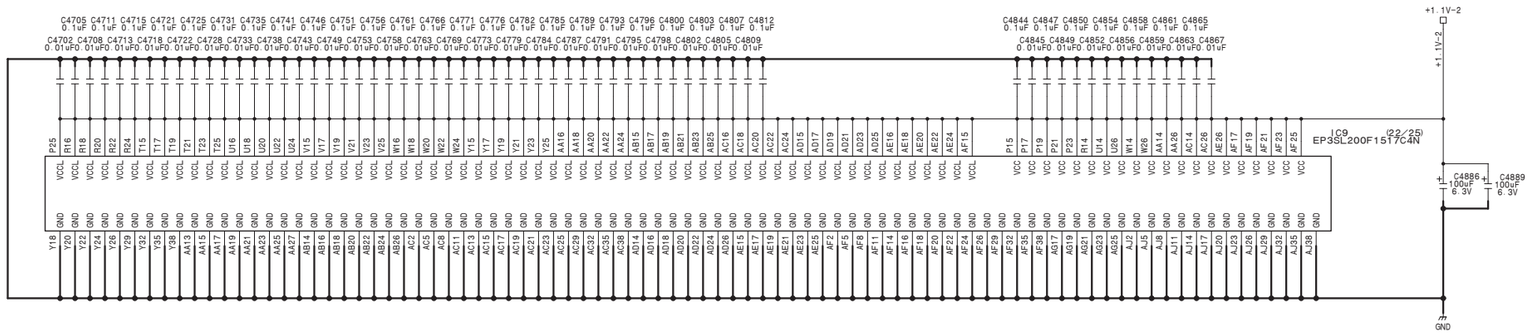

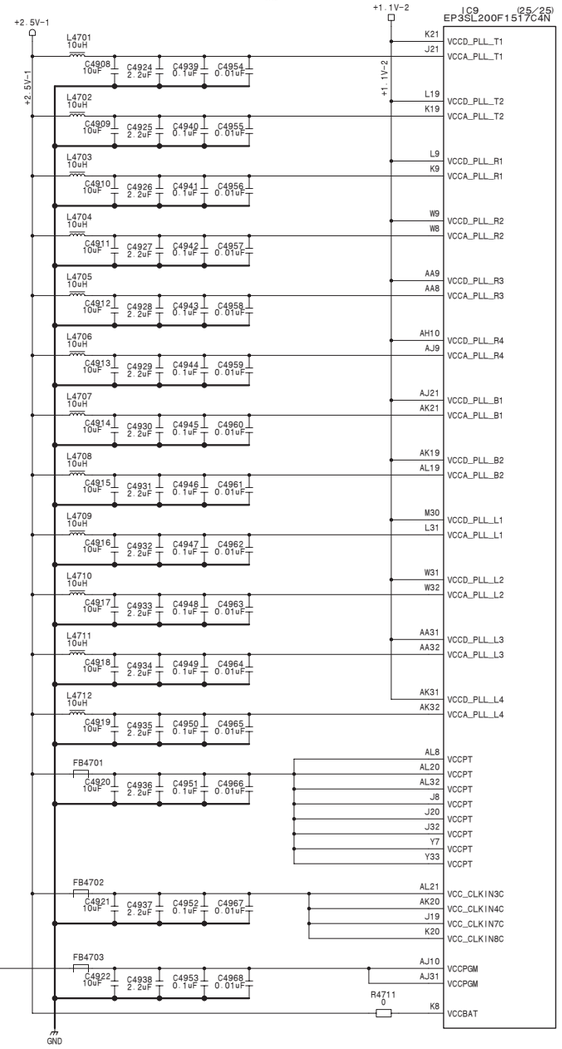

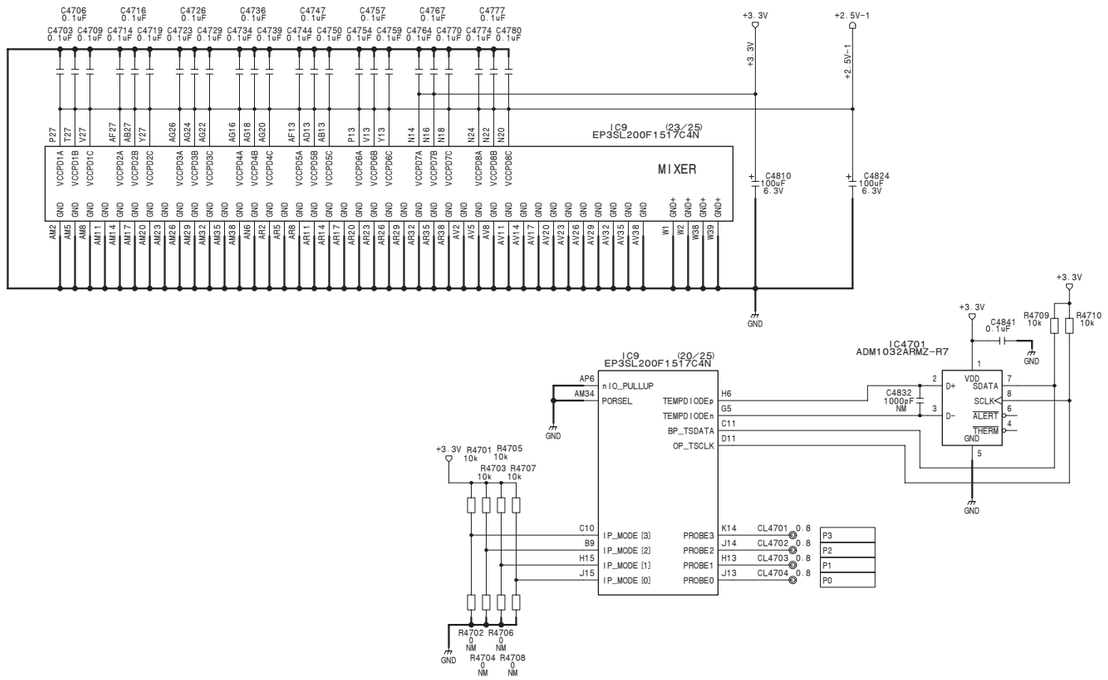

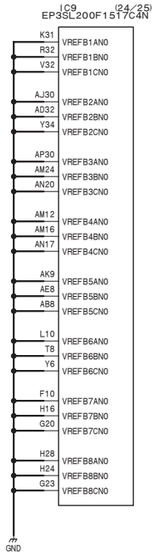

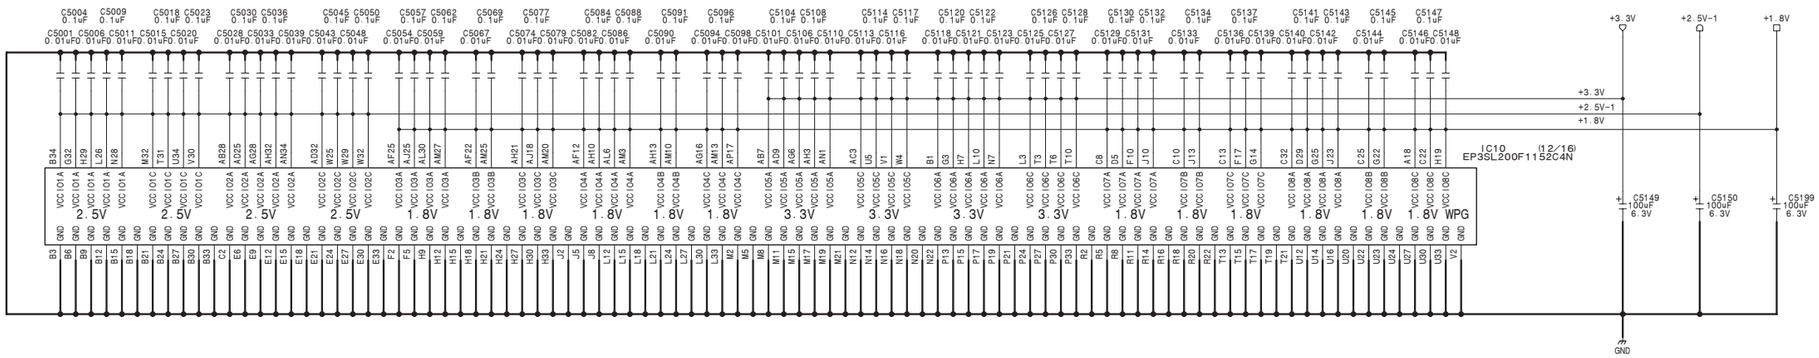

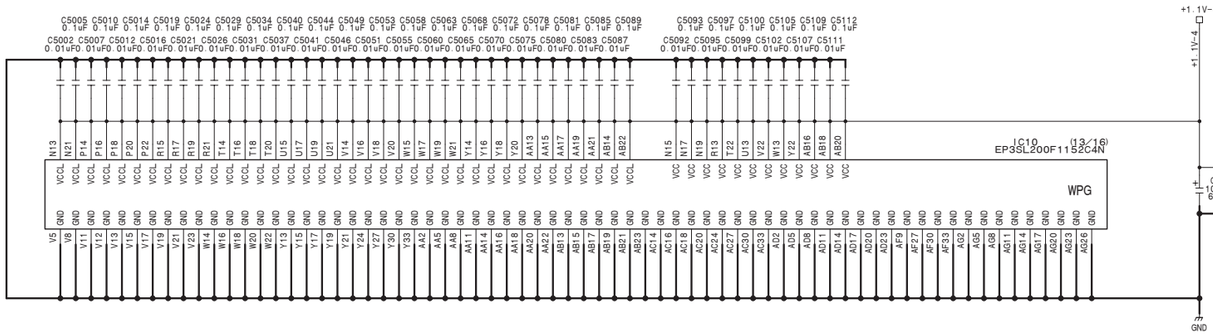

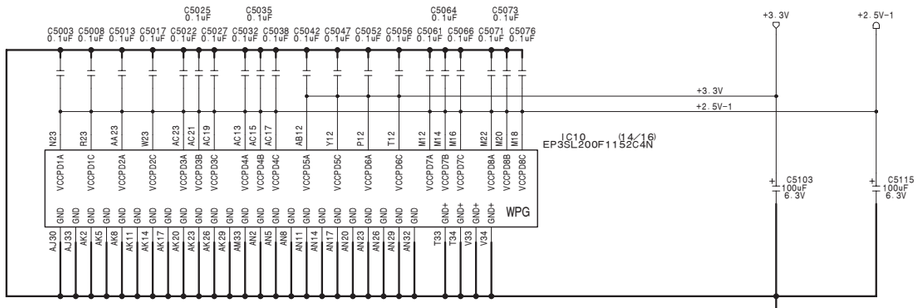

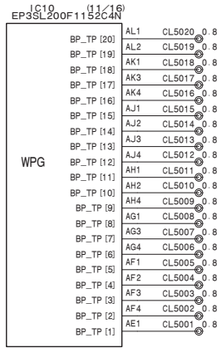

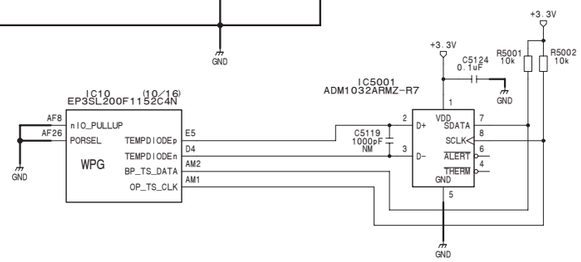

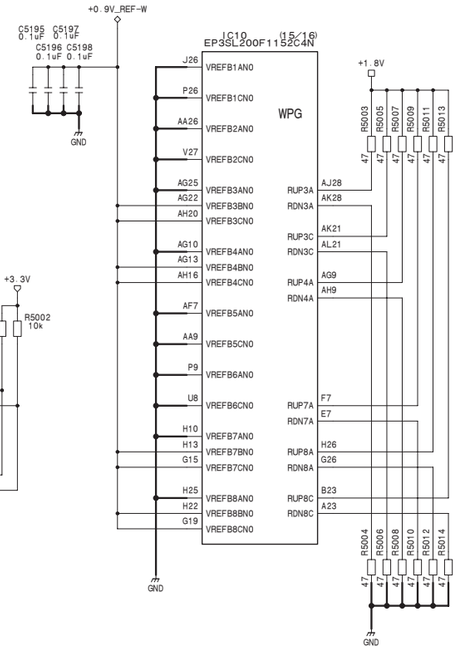

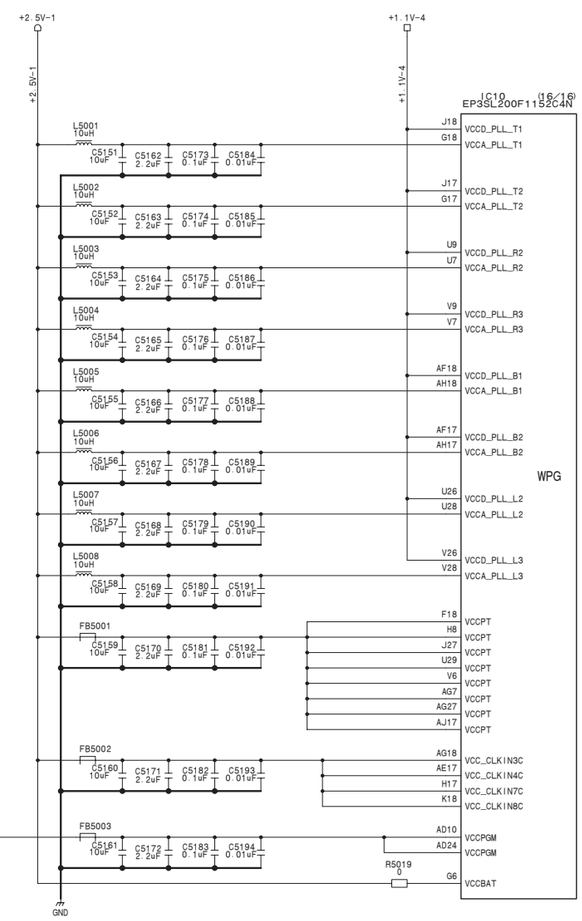

MIX-53 (46/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_46

MIX-53 (47/48)
SUFFIX: -13

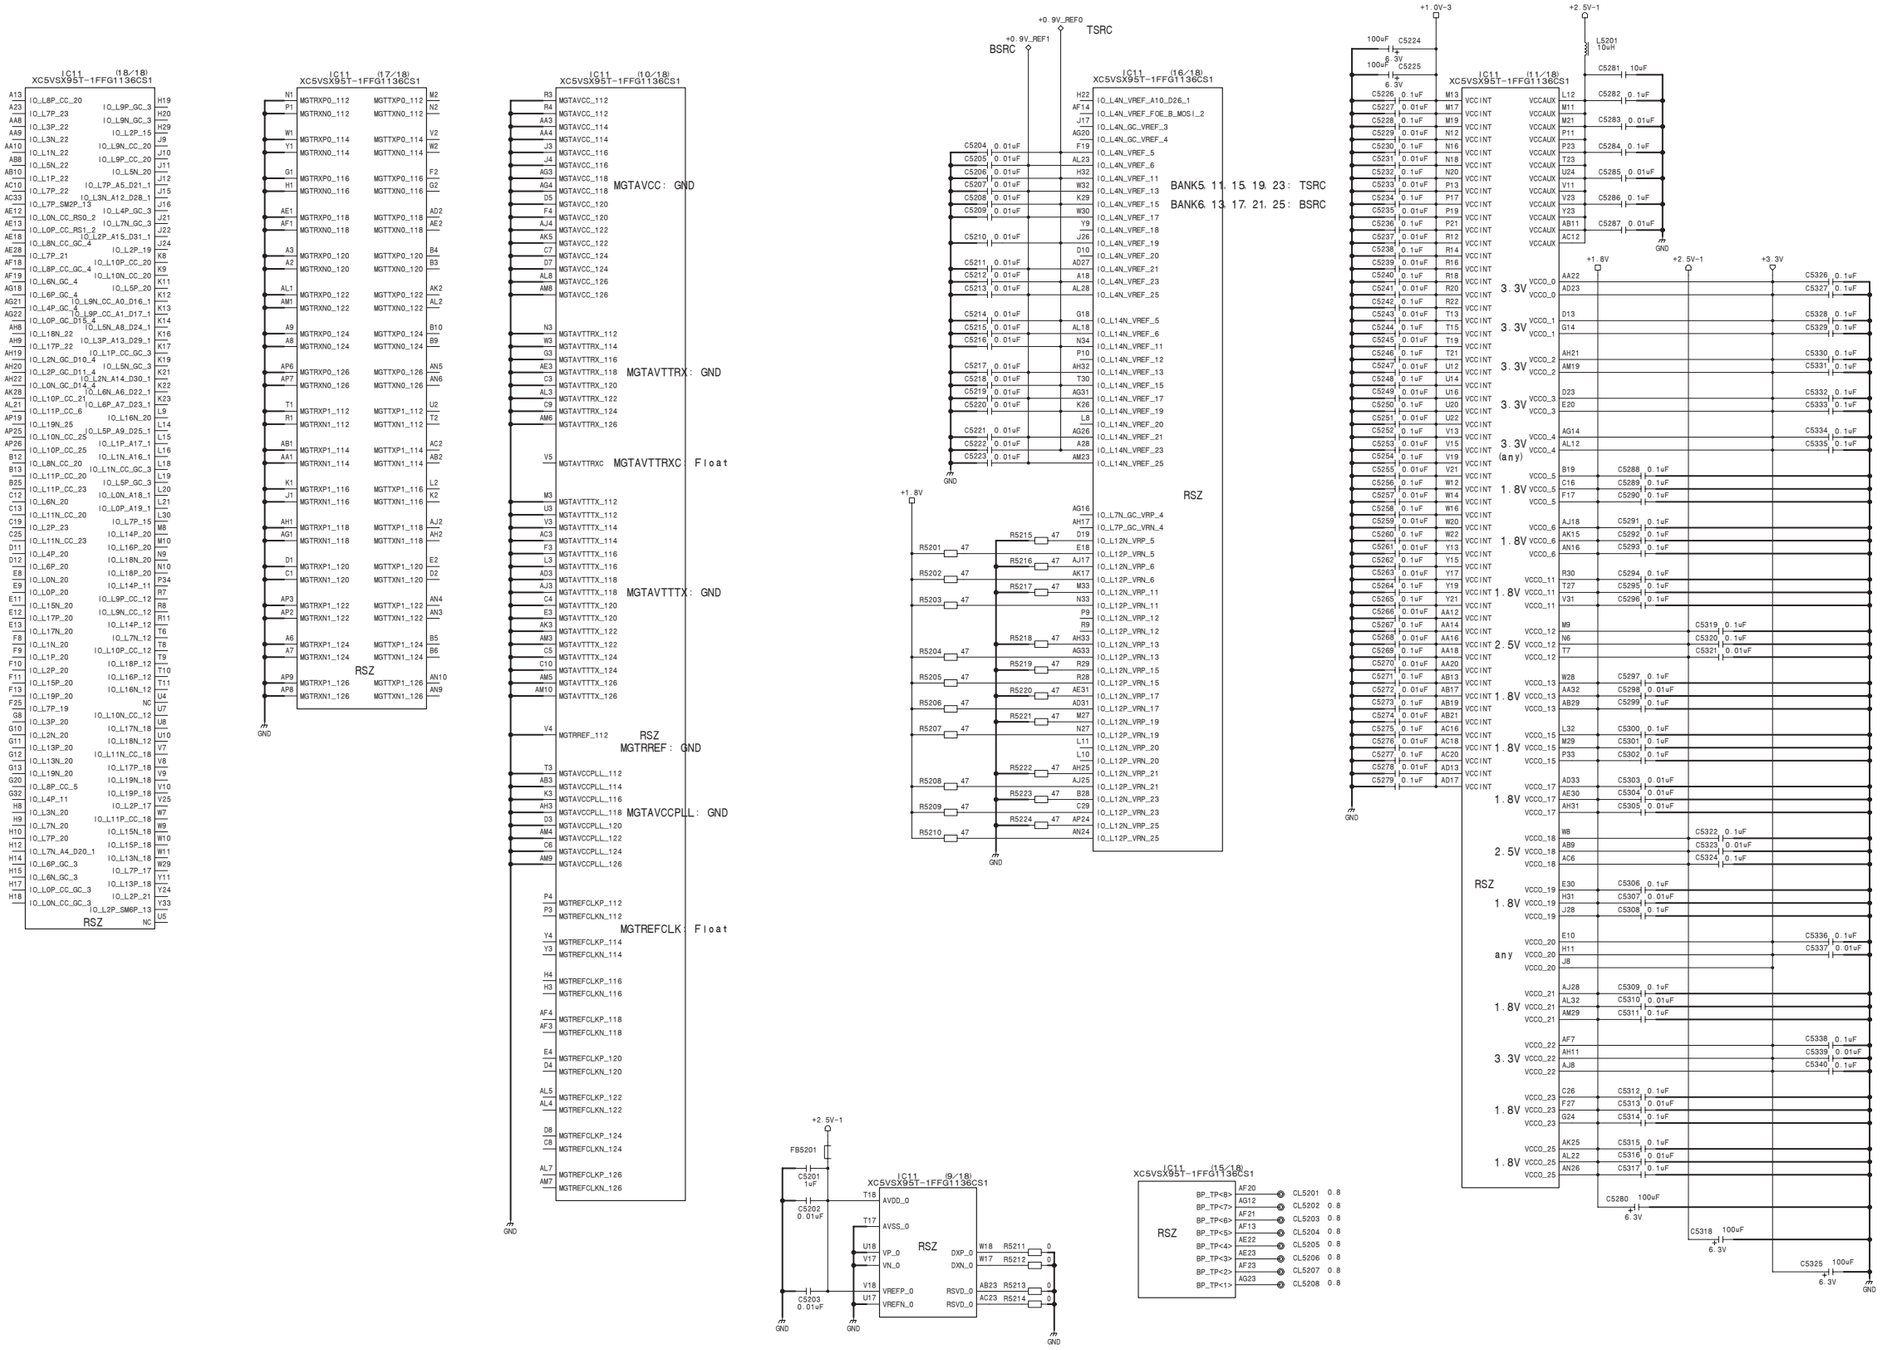

MIX-53 (48/48)
SUFFIX: -13

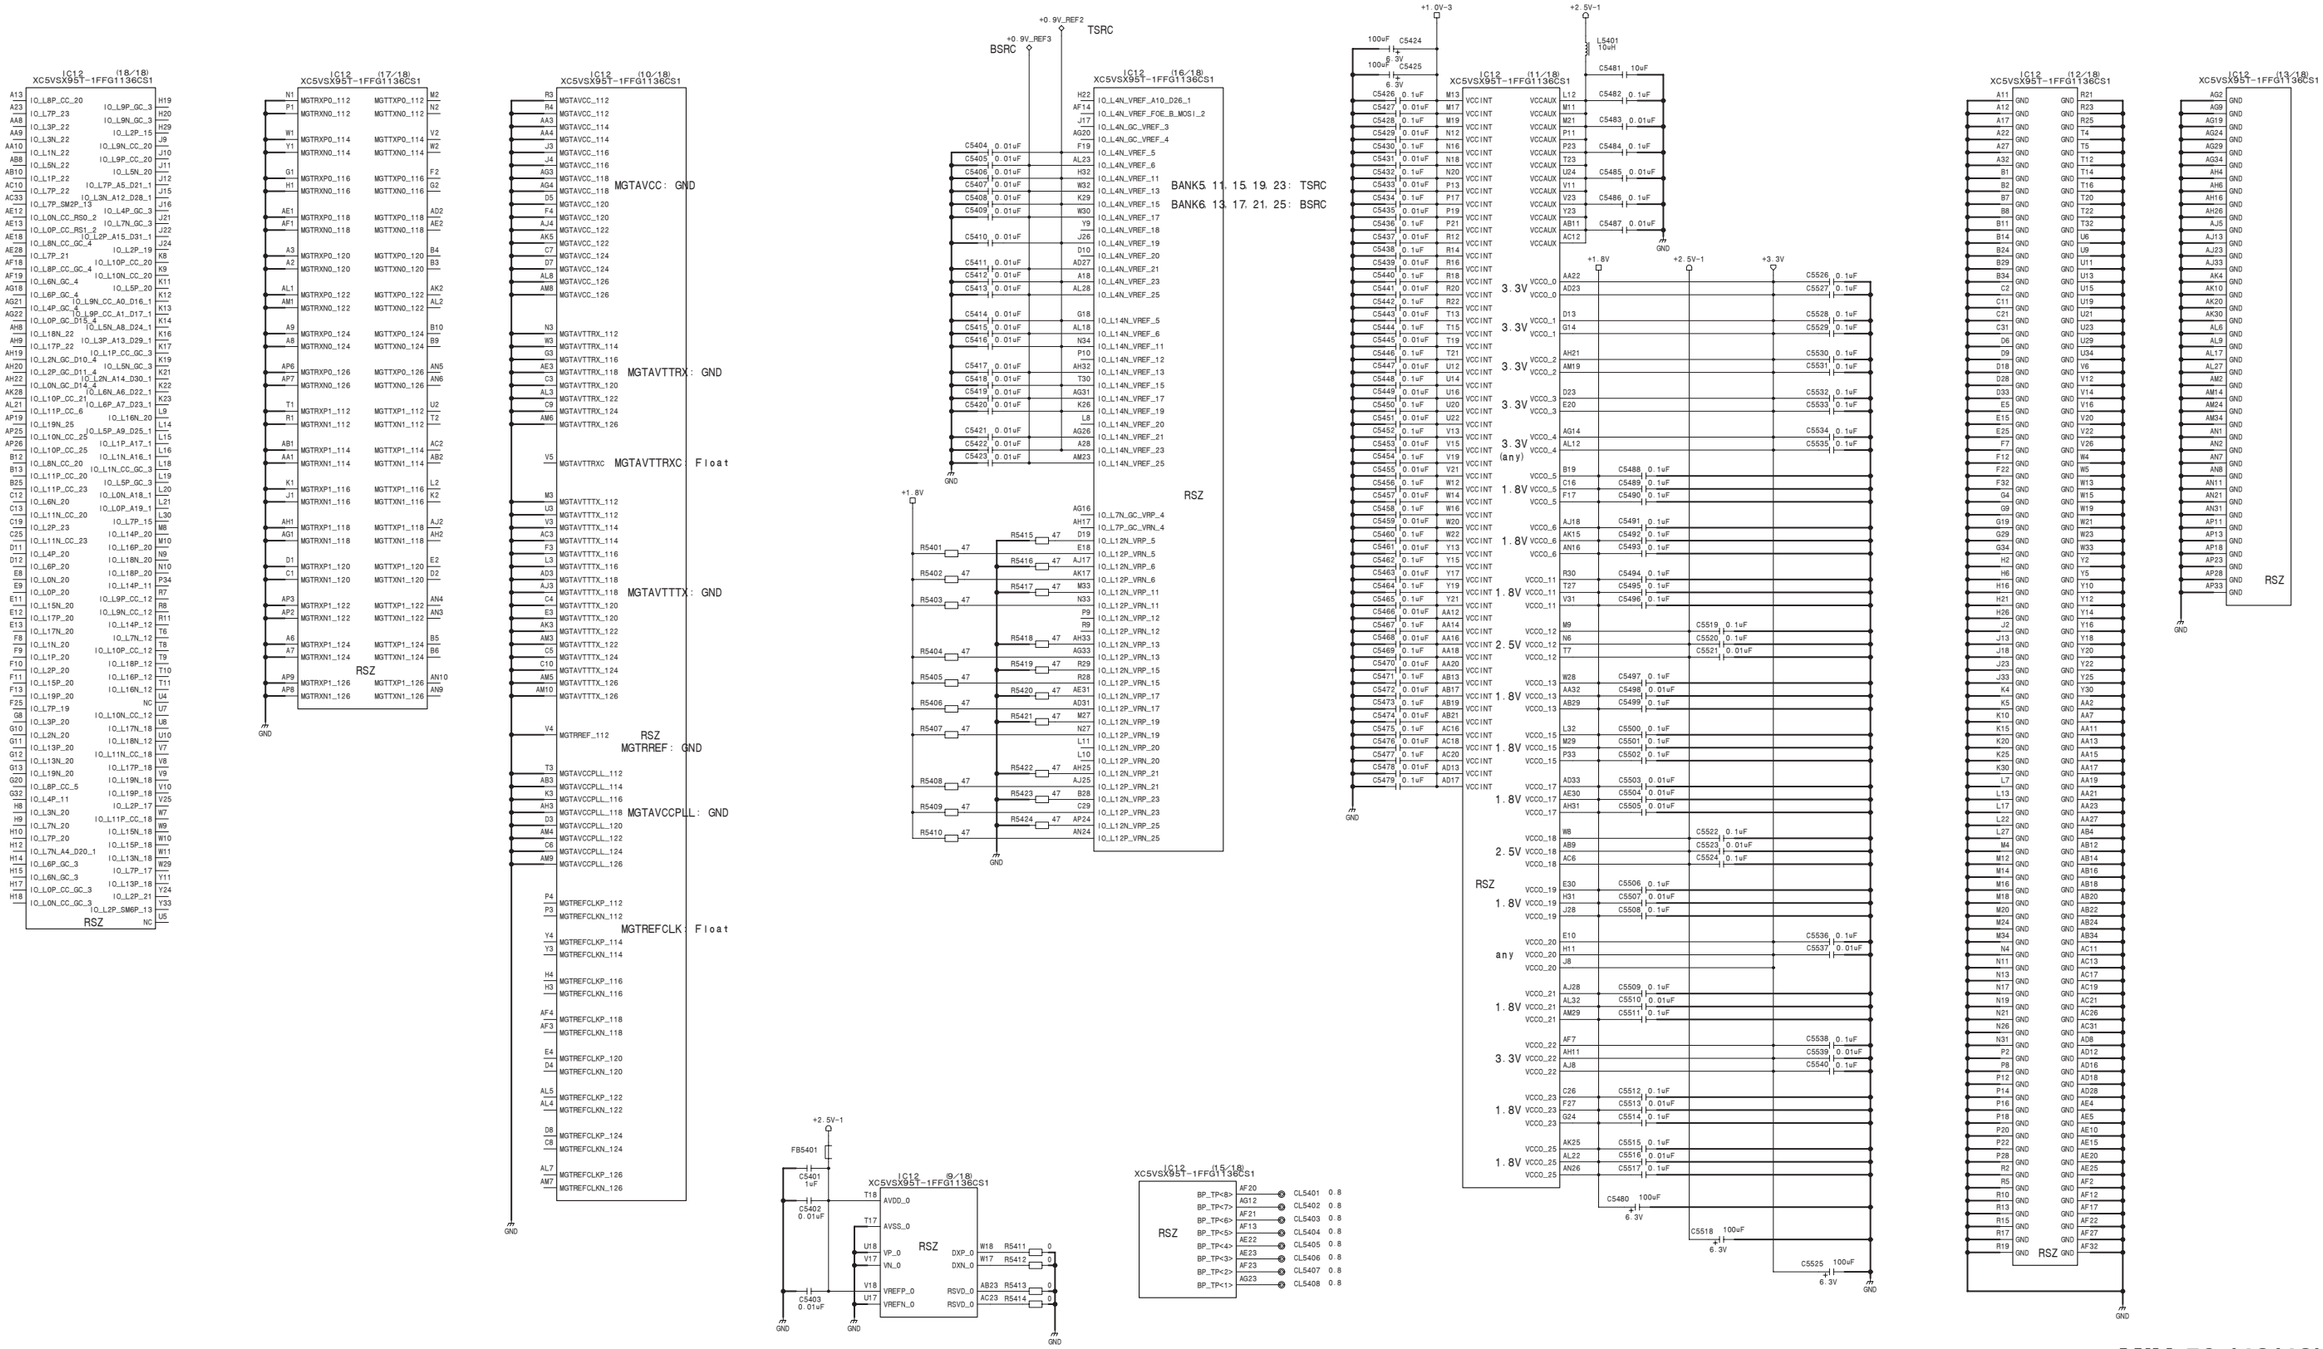

4-234

MVS-8000X/7000X

MIX-53 (48/48)

BOARD NO. 1-879-577-13

MVS-8000X_MIX-53_003_48

MIX-53 (1/48)
SUFFIX: -14

Leftmost

(MB : CNA)
CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET	DC_ENBL	GND	(for Rear)	FUSE+12V	GND
6	GND (BD_EXT_SLF)	(for Rear)	GND	(for Rear)	(for Rear)	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9			GND			GND
10			GND			GND

(MB : CNB)
CNC1

	A	B	BG	C	D	DG
1	VCLKP	VCLKN	GND			GND
2	FDP	FDN	GND	VDP	VDN	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET_TRX0P	INET_TRX0N	GND	INET_TRX1P	INET_TRX1N	GND
7	INET_TRX2P	INET_TRX2N	GND	INET_TRX3P	INET_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNE1

	A	B	BG	C	D	DG
1	ME_KEY6_SRCBP	ME_KEY6_SRCBN	GND	ME_KEY2_SRCBP	ME_KEY2_SRCBN	GND
2	ME_KEY6_SRCAP	ME_KEY6_SRCAN	GND	ME_KEY2_SRCAP	ME_KEY2_SRCAN	GND
3	ME_KEY6_FILBP	ME_KEY6_FILBN	GND	ME_KEY2_FILBP	ME_KEY2_FILBN	GND
4	ME_OUT8P	ME_OUT8N	GND	ME_KEY2_FILAP	ME_KEY2_FILAN	GND
5	ME_OUT7P	ME_OUT7N	GND	ME_KEY6_FILAP	ME_KEY6_FILAN	GND
6	ME_OUT6P	ME_OUT6N	GND	ME_KEY5_SRCBP	ME_KEY5_SRCBN	GND
7	ME_OUT5P	ME_OUT5N	GND	ME_KEY1_SRCBP	ME_KEY1_SRCBN	GND
8	ME_KEY5_SRCAP	ME_KEY5_SRCAN	GND	ME_KEY1_SRCAP	ME_KEY1_SRCAN	GND
9	ME_KEY5_FILBP	ME_KEY5_FILBN	GND	ME_KEY1_FILBP	ME_KEY1_FILBN	GND
10	ME_KEY5_FILAP	ME_KEY5_FILAN	GND	ME_KEY1_FILAP	ME_KEY1_FILAN	GND

CNG1

	A	B	BG	C	D	DG
1			GND	ME_EXT_DMEBP	ME_EXT_DMEBN	GND
2	ME_BGCOL2P	ME_BGCOL2N	GND	ME_EXT_DMEAP	ME_EXT_DMEAN	GND
3	ME_BGCOLP	ME_BGCOLN	GND			GND
4			GND	ME_UTILL3BP	ME_UTILL3BN	GND
5			GND	ME_UTILL3AP	ME_UTILL3AN	GND
6			GND	ME_UTILL2BP	ME_UTILL2BN	GND
7	ME_PROCK2P	ME_PROCK2N	GND	ME_UTILL2AP	ME_UTILL2AN	GND
8	ME_PROCKP	ME_PROCKN	GND			GND
9	ME_PROCV2P	ME_PROCV2N	GND	ME_UTILL1BP	ME_UTILL1BN	GND
10	ME_PROCVP	ME_PROCVN	GND	ME_UTILL1AP	ME_UTILL1AN	GND

CNJ1

	A	B	BG	C	D	DG
1	ME_SEND4KP	ME_SEND4KN	GND	ME_MVE4KP	ME_MVE4KN	GND
2	ME_SEND2KP	ME_SEND2KN	GND	ME_MVE2KP	ME_MVE2KN	GND
3			GND			GND
4	ME_SEND4VP	ME_SEND4VN	GND	ME_MVE4VP	ME_MVE4VN	GND
5	ME_SEND2VP	ME_SEND2VN	GND	ME_MVE2VP	ME_MVE2VN	GND
6	ME_SEND3KP	ME_SEND3KN	GND	ME_MVE3KP	ME_MVE3KN	GND
7	ME_SEND1KP	ME_SEND1KN	GND	ME_MVE1KP	ME_MVE1KN	GND
8			GND			GND
9	ME_SEND3VP	ME_SEND3VN	GND	ME_MVE3VP	ME_MVE3VN	GND
10	ME_SEND1VP	ME_SEND1VN	GND	ME_MVE1VP	ME_MVE1VN	GND

CNL1

	A	B	BG	C	D	DG
1	ME_EXT_OUT4P	ME_EXT_OUT4N	GND	ME_DMEKBP	ME_DMEKBN	GND
2			GND	ME_DMEKAP	ME_DMEKAN	GND
3	ME_EXT_OUT3P	ME_EXT_OUT3N	GND			GND
4			GND	ME_DMEVBP	ME_DMEVBN	GND
5			GND	ME_DMEVAP	ME_DMEVAN	GND
6			GND	ME_BKGDBBP	ME_BKGDBBN	GND
7			GND	ME_BKGDBAP	ME_BKGDBAN	GND
8	ME_EXT_OUT2P	ME_EXT_OUT2N	GND			GND
9			GND	ME_BKGDABP	ME_BKGDABN	GND
10	ME_EXT_OUT1P	ME_EXT_OUT1N	GND	ME_BKGDAAP	ME_BKGDAAN	GND

(MB : CNP)
CNN1

	A	B	BG	C	D	DG
1	ME_KEY8_SRCBP	ME_KEY8_SRCBN	GND	ME_KEY4_SRCBP	ME_KEY4_SRCBN	GND
2	ME_KEY8_SRCAP	ME_KEY8_SRCAN	GND	ME_KEY4_SRCAP	ME_KEY4_SRCAN	GND
3	ME_KEY8_FILBP	ME_KEY8_FILBN	GND	ME_KEY4_FILBP	ME_KEY4_FILBN	GND
4	ME_OUT4P	ME_OUT4N	GND	ME_KEY4_FILAP	ME_KEY4_FILAN	GND
5	ME_OUT3P	ME_OUT3N	GND	ME_KEY8_FILAP	ME_KEY8_FILAN	GND
6	ME_OUT2P	ME_OUT2N	GND	ME_KEY7_SRCBP	ME_KEY7_SRCBN	GND
7	ME_OUT1P	ME_OUT1N	GND	ME_KEY3_SRCBP	ME_KEY3_SRCBN	GND
8	ME_KEY7_SRCAP	ME_KEY7_SRCAN	GND	ME_KEY3_SRCAP	ME_KEY3_SRCAN	GND
9	ME_KEY7_FILBP	ME_KEY7_FILBN	GND	ME_KEY3_FILBP	ME_KEY3_FILBN	GND
10	ME_KEY7_FILAP	ME_KEY7_FILAN	GND	ME_KEY3_FILAP	ME_KEY3_FILAN	GND

Rightmost

MIX-53 (1/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_1

MIX-53 (2/48)
SUFFIX: -14

MIX-53 (2/48)
SUFFIX: -14

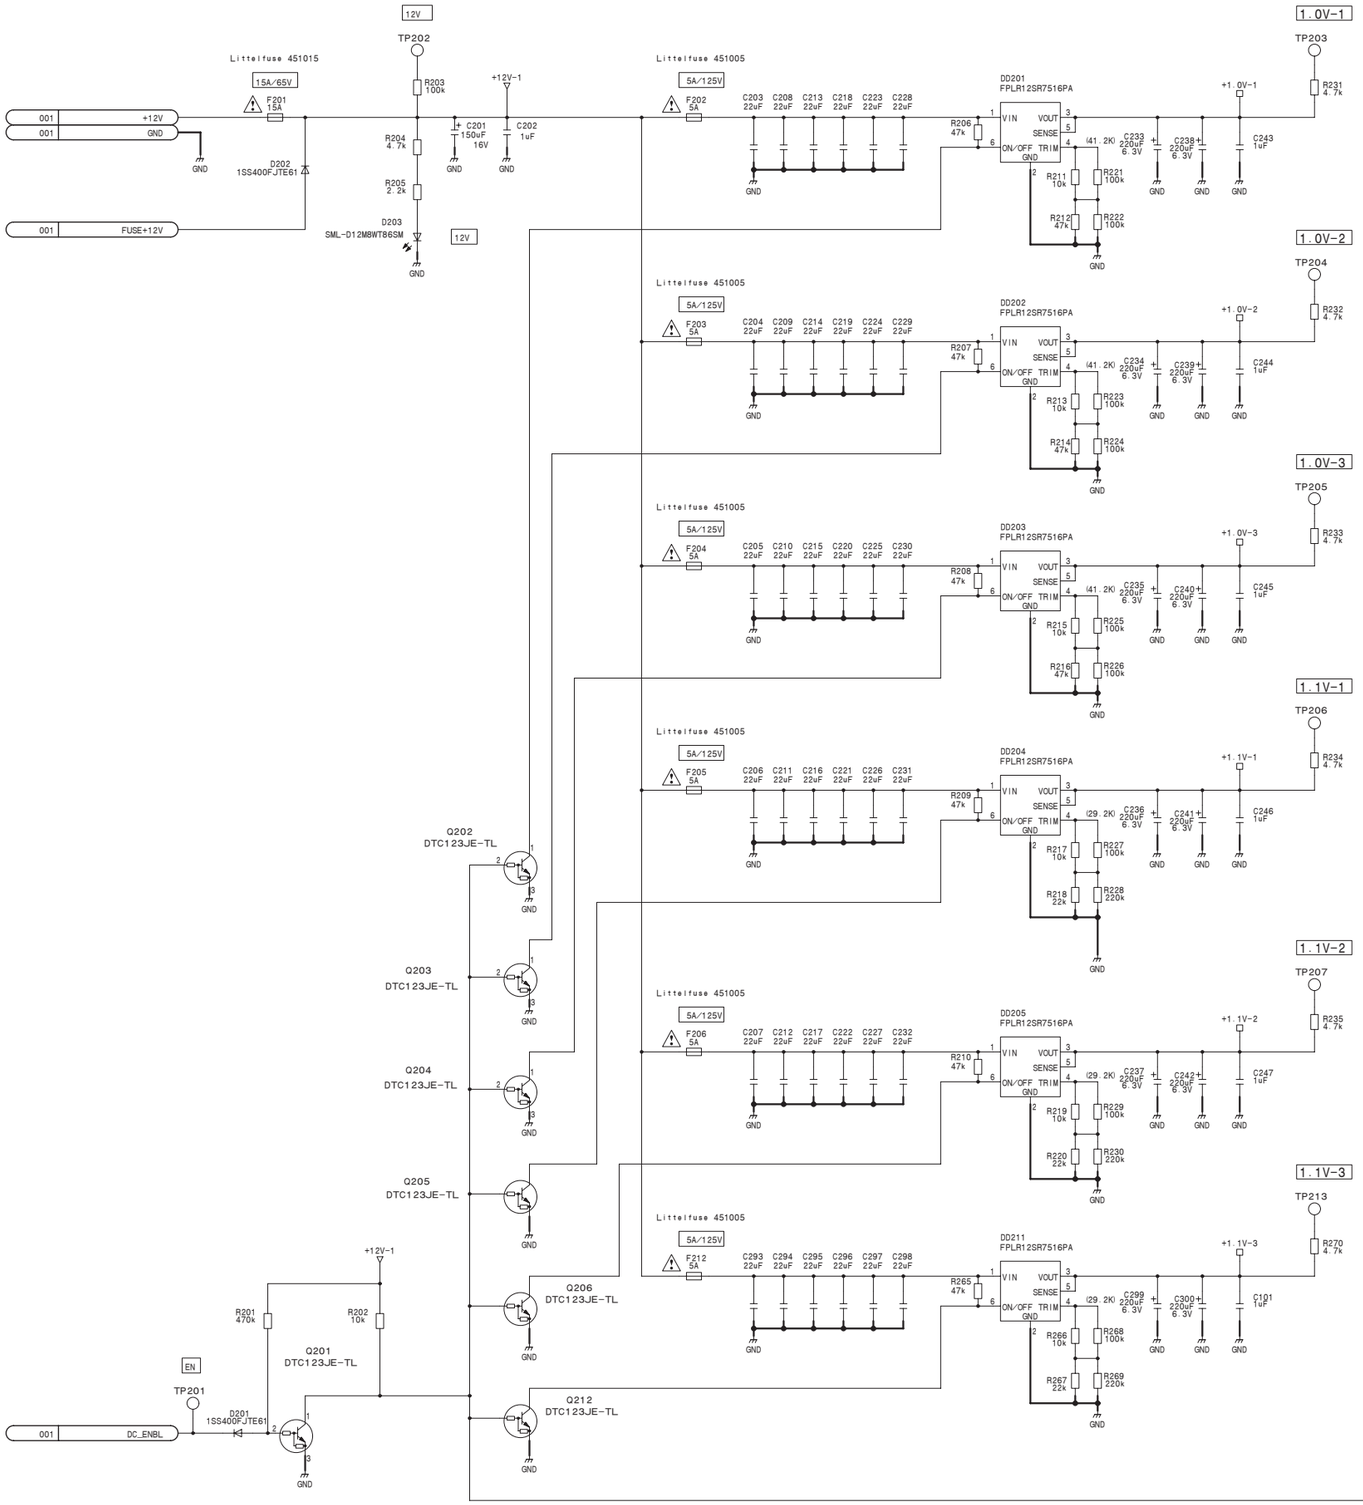

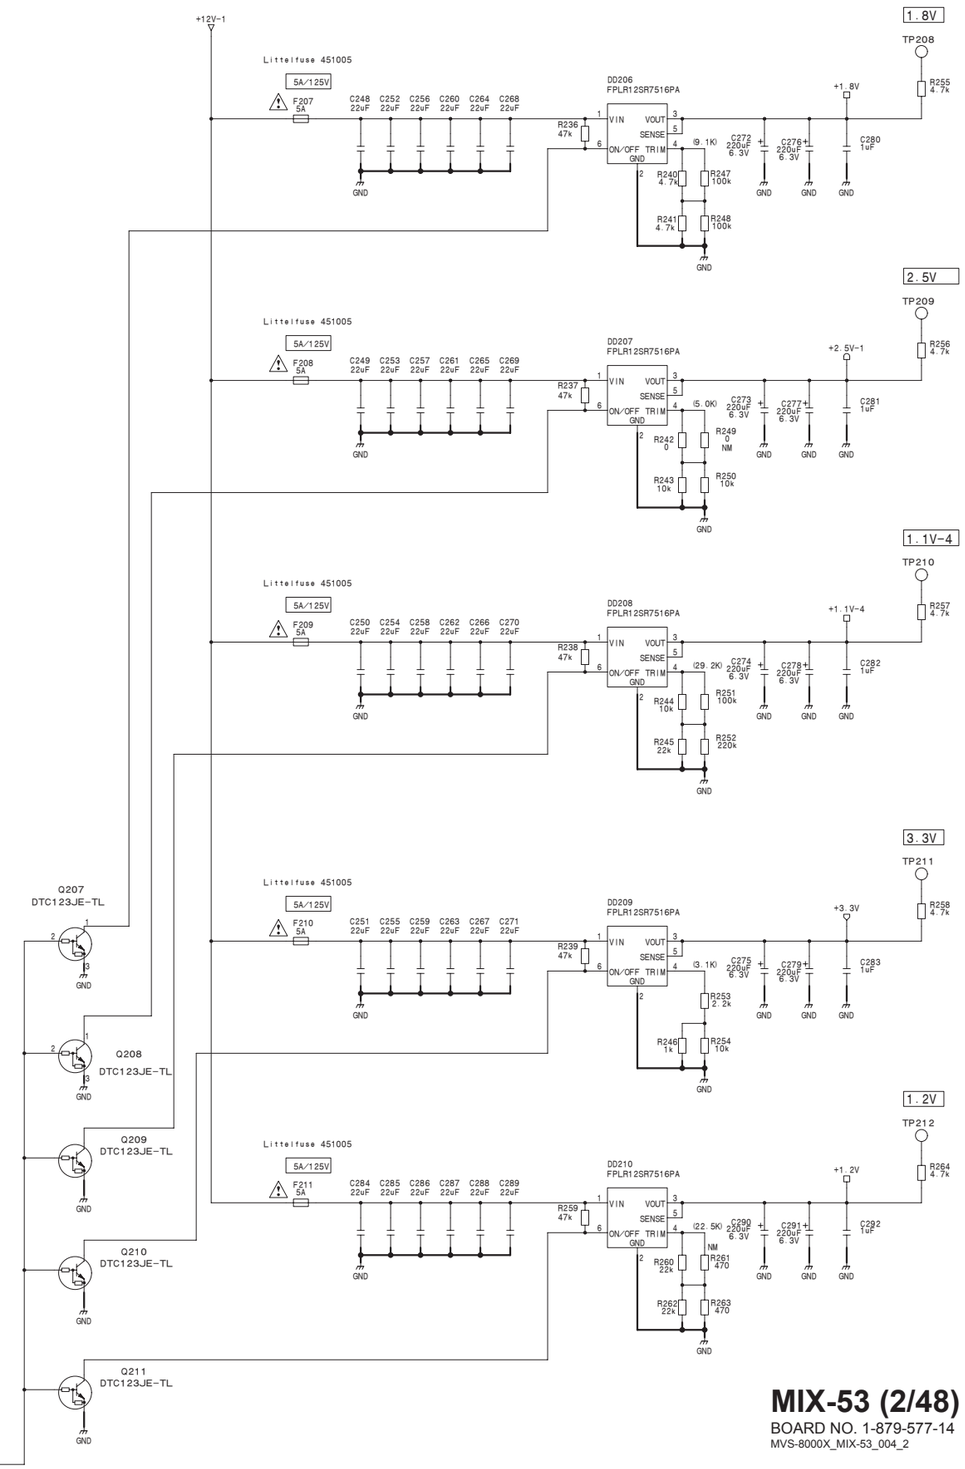

MIX-53 (2/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_2

MIX-53 (3/48)

SUFFIX: -14

MIX-53 (3/48)

SUFFIX: -14

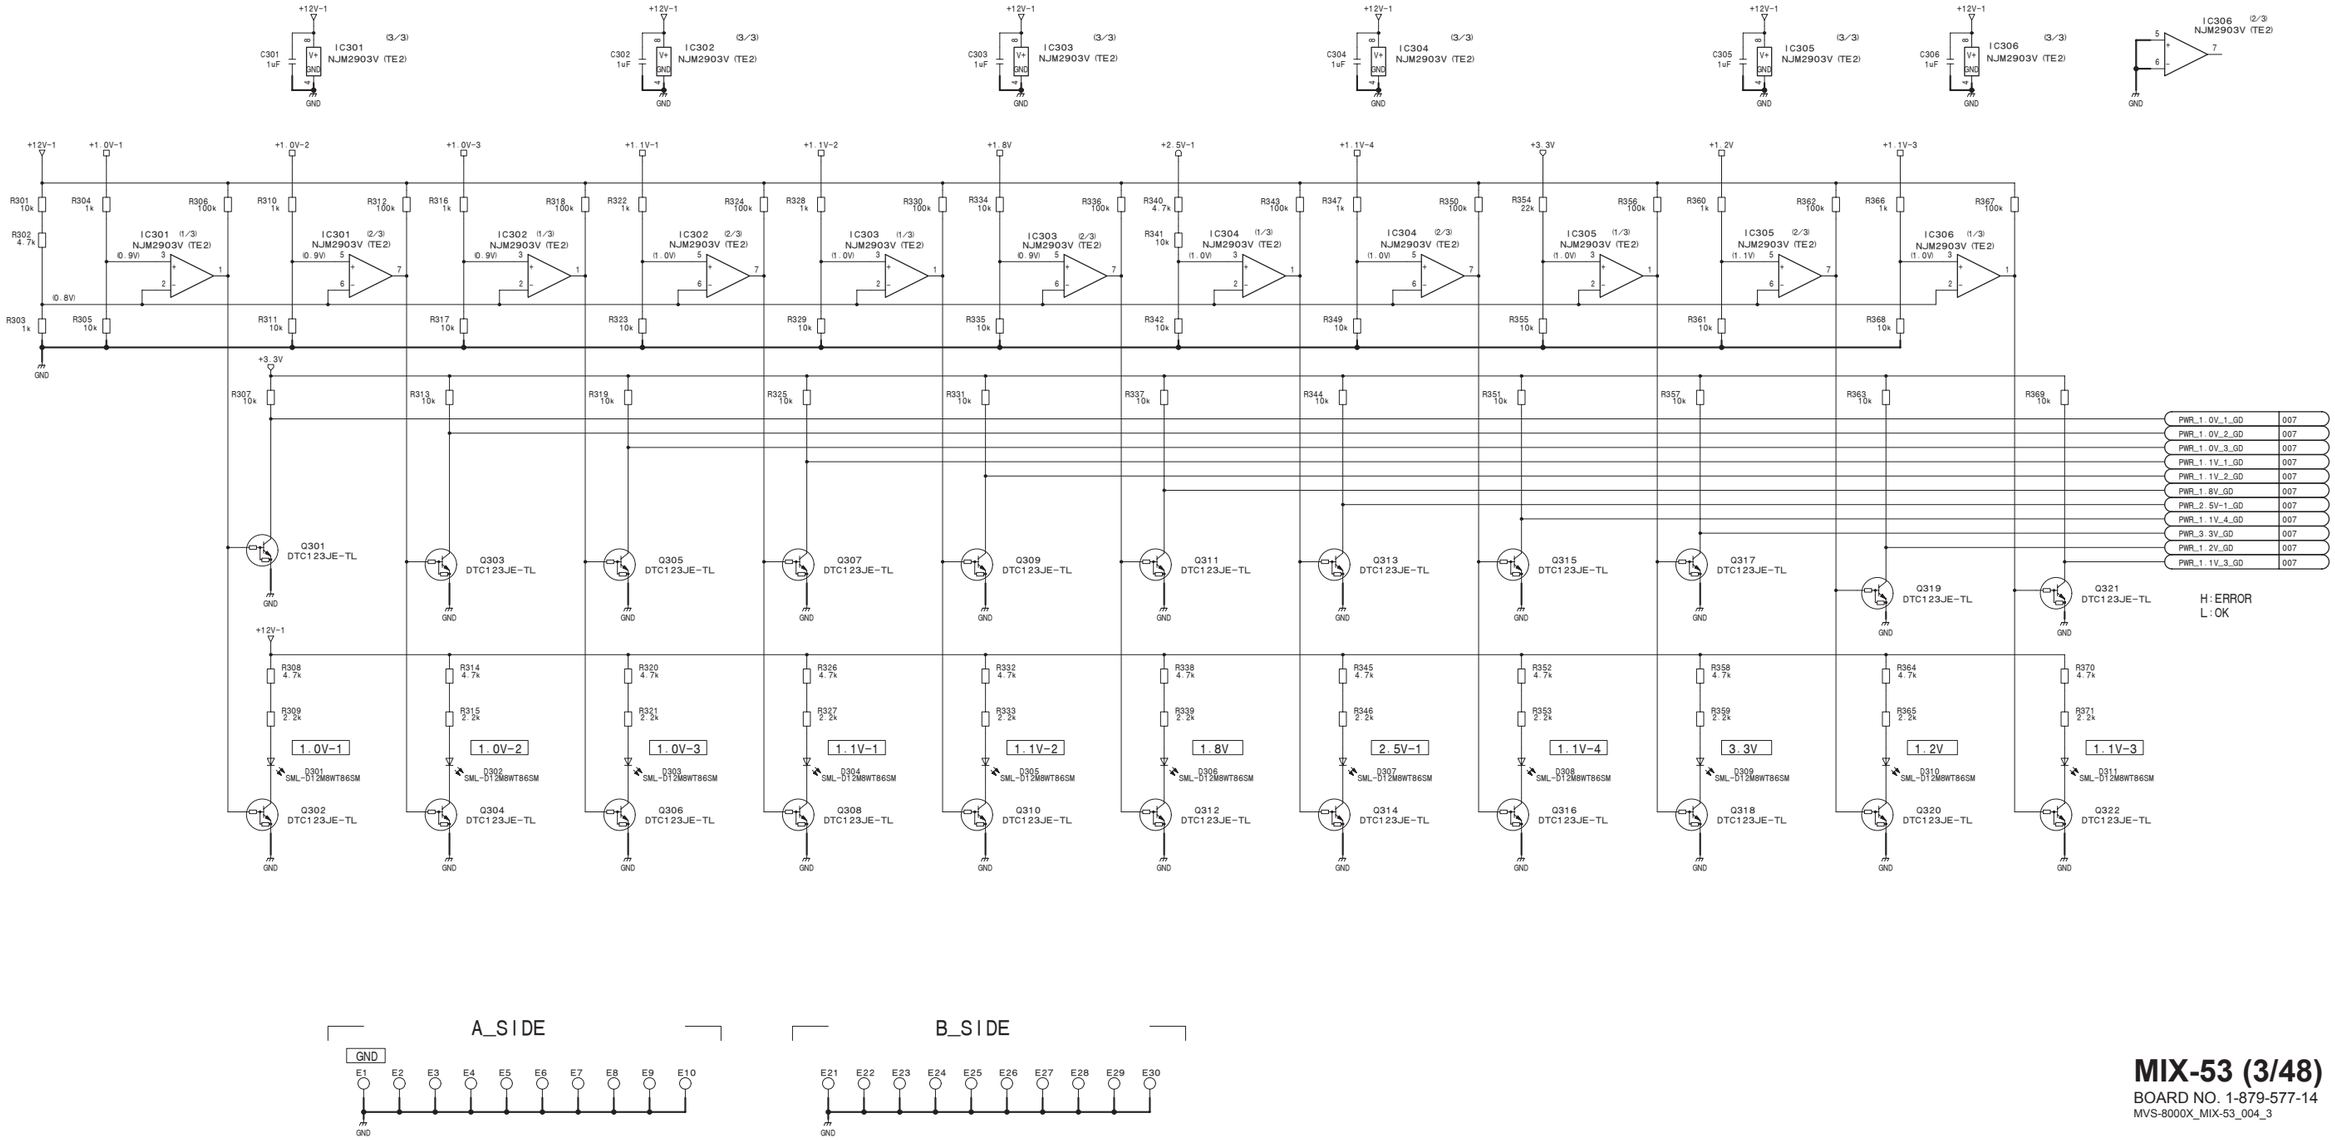

MIX-53 (3/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_3

4-189 (a)

MIX-53 (4/48)

SUFFIX: -14

MIX-53 (4/48)

SUFFIX: -14

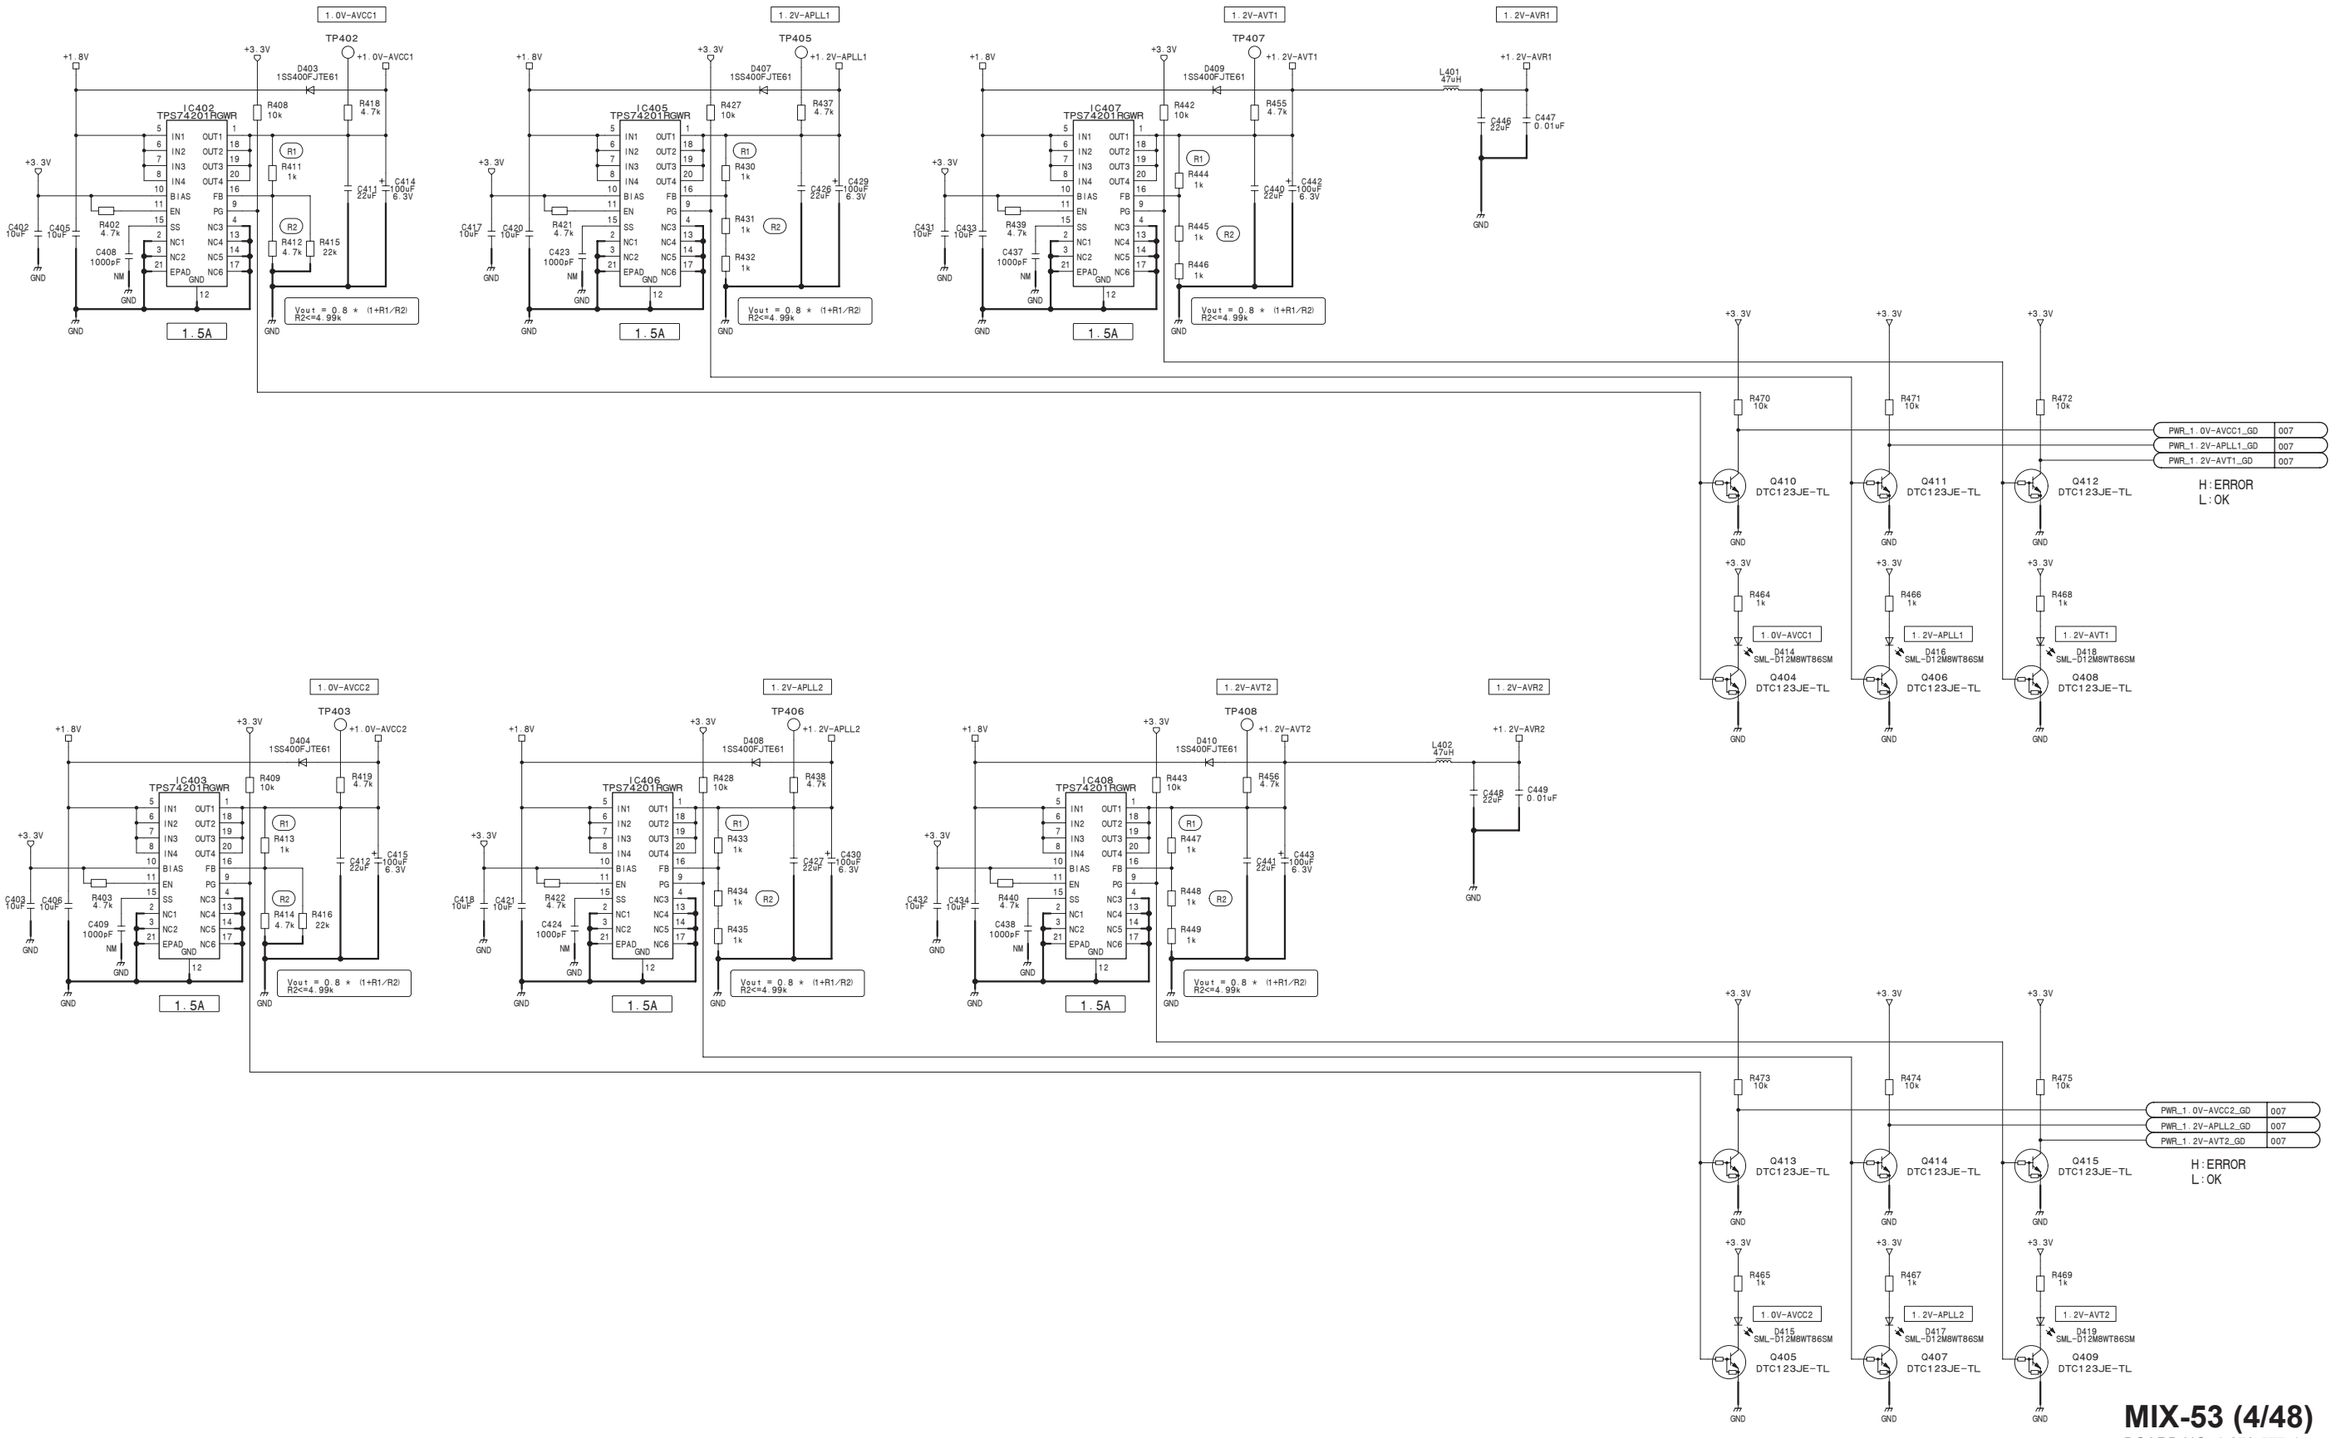

MIX-53 (4/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_4

4-190 (a)

A B C D E F G H

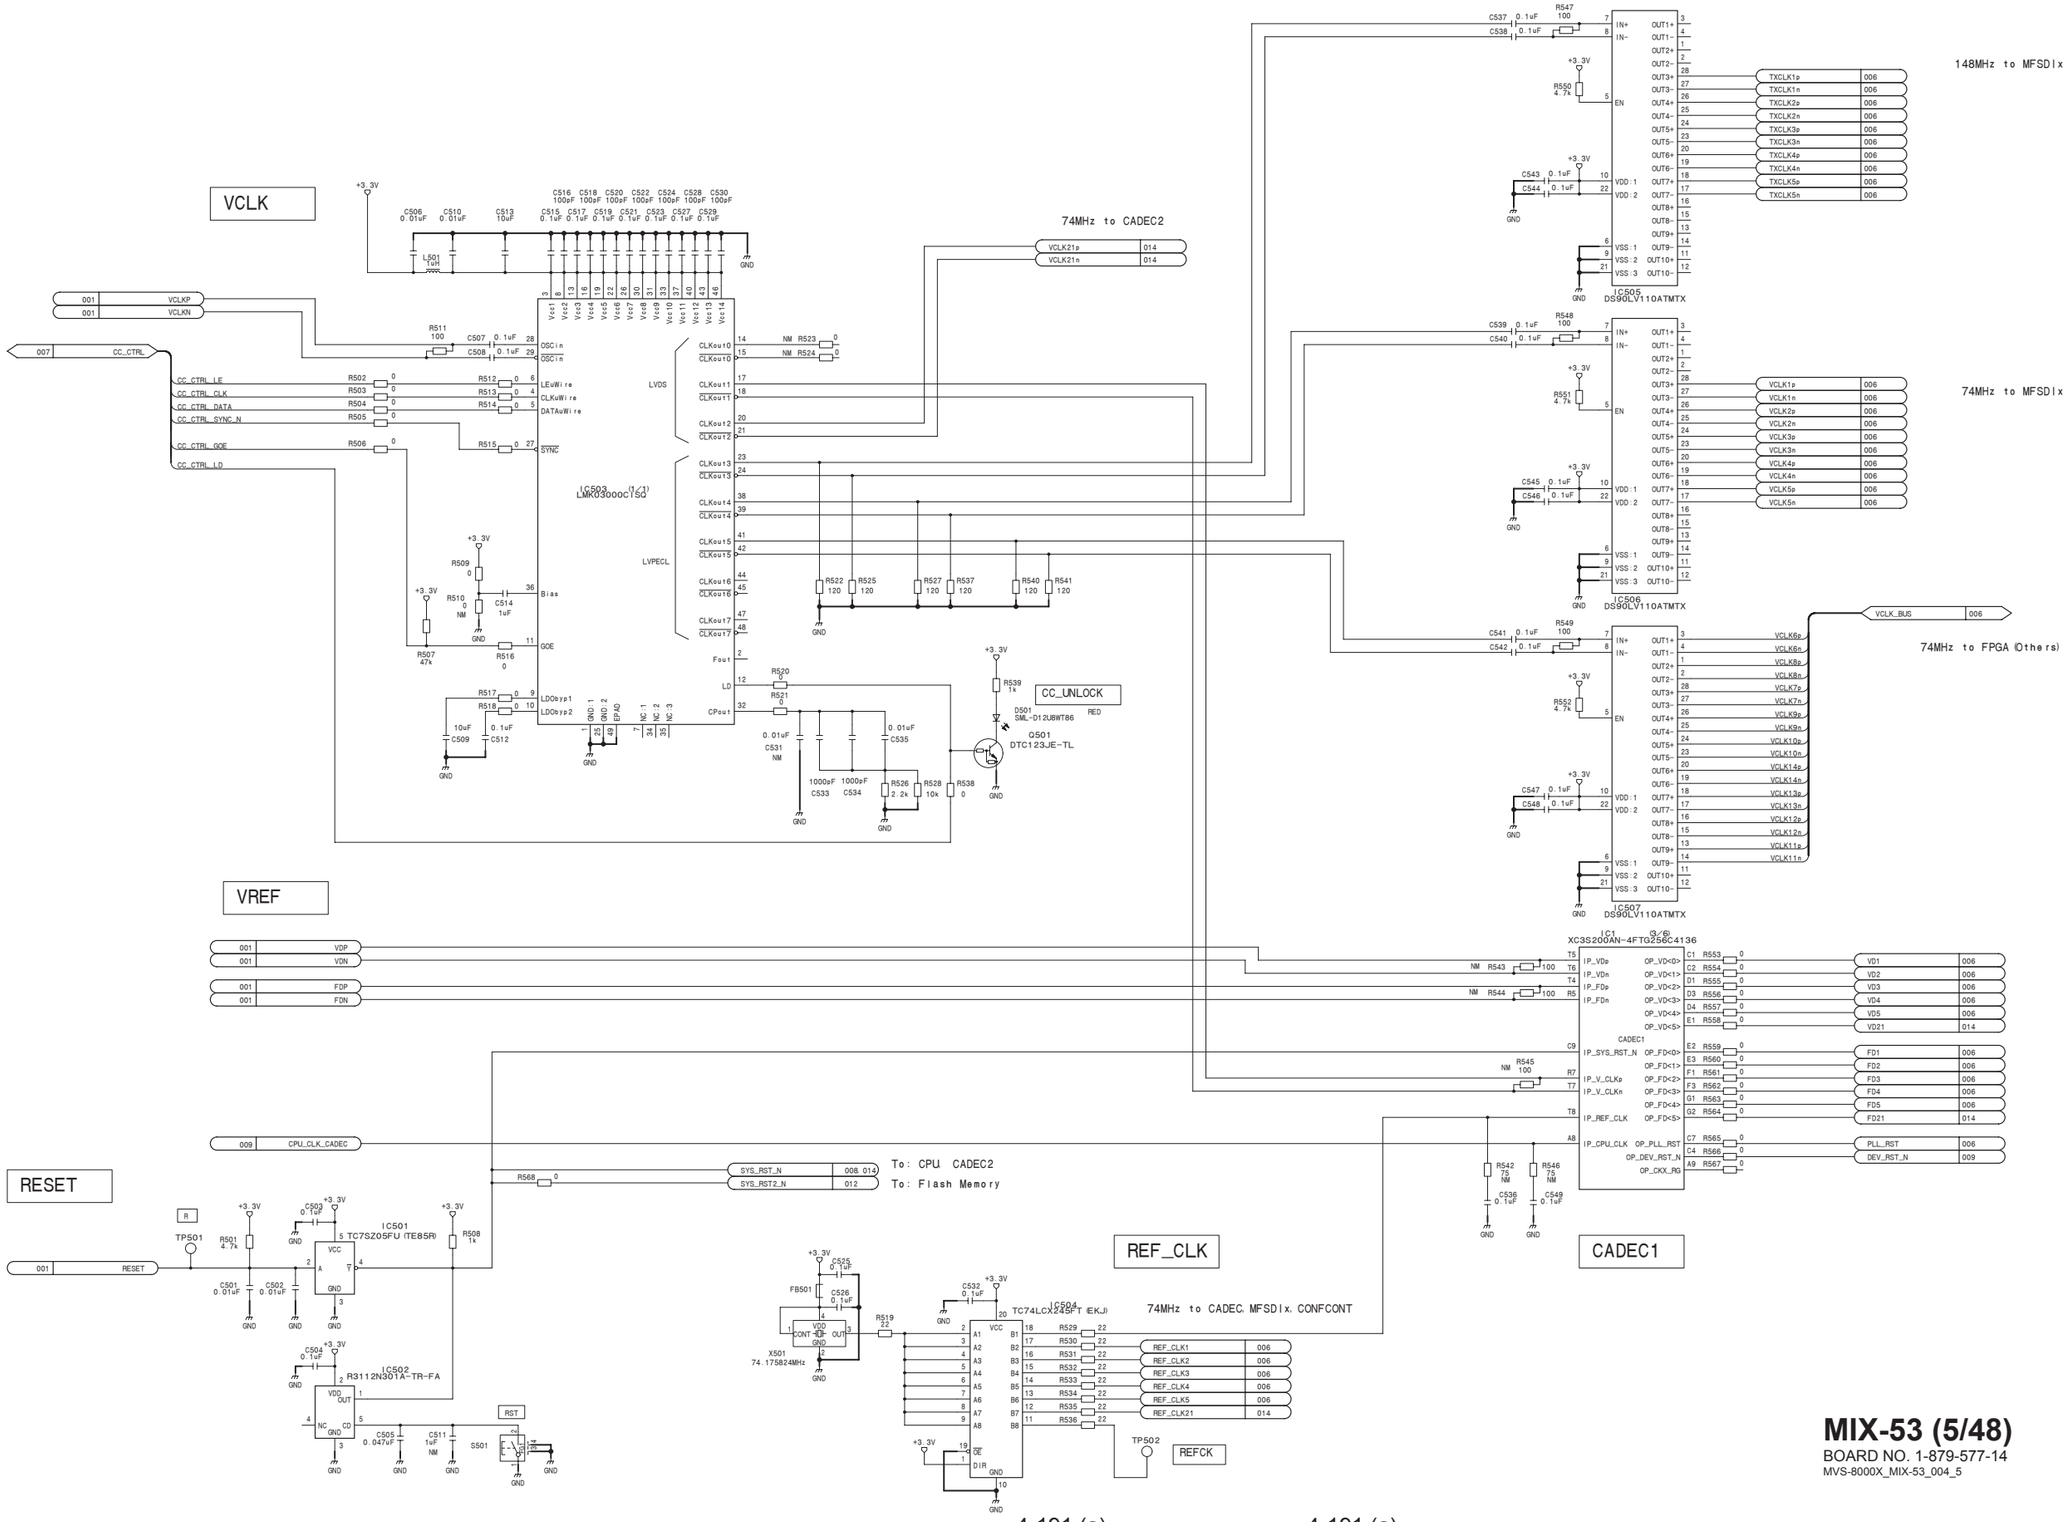

MIX-53 (5/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_5

MIX-53 (6/48)
SUFFIX: -14

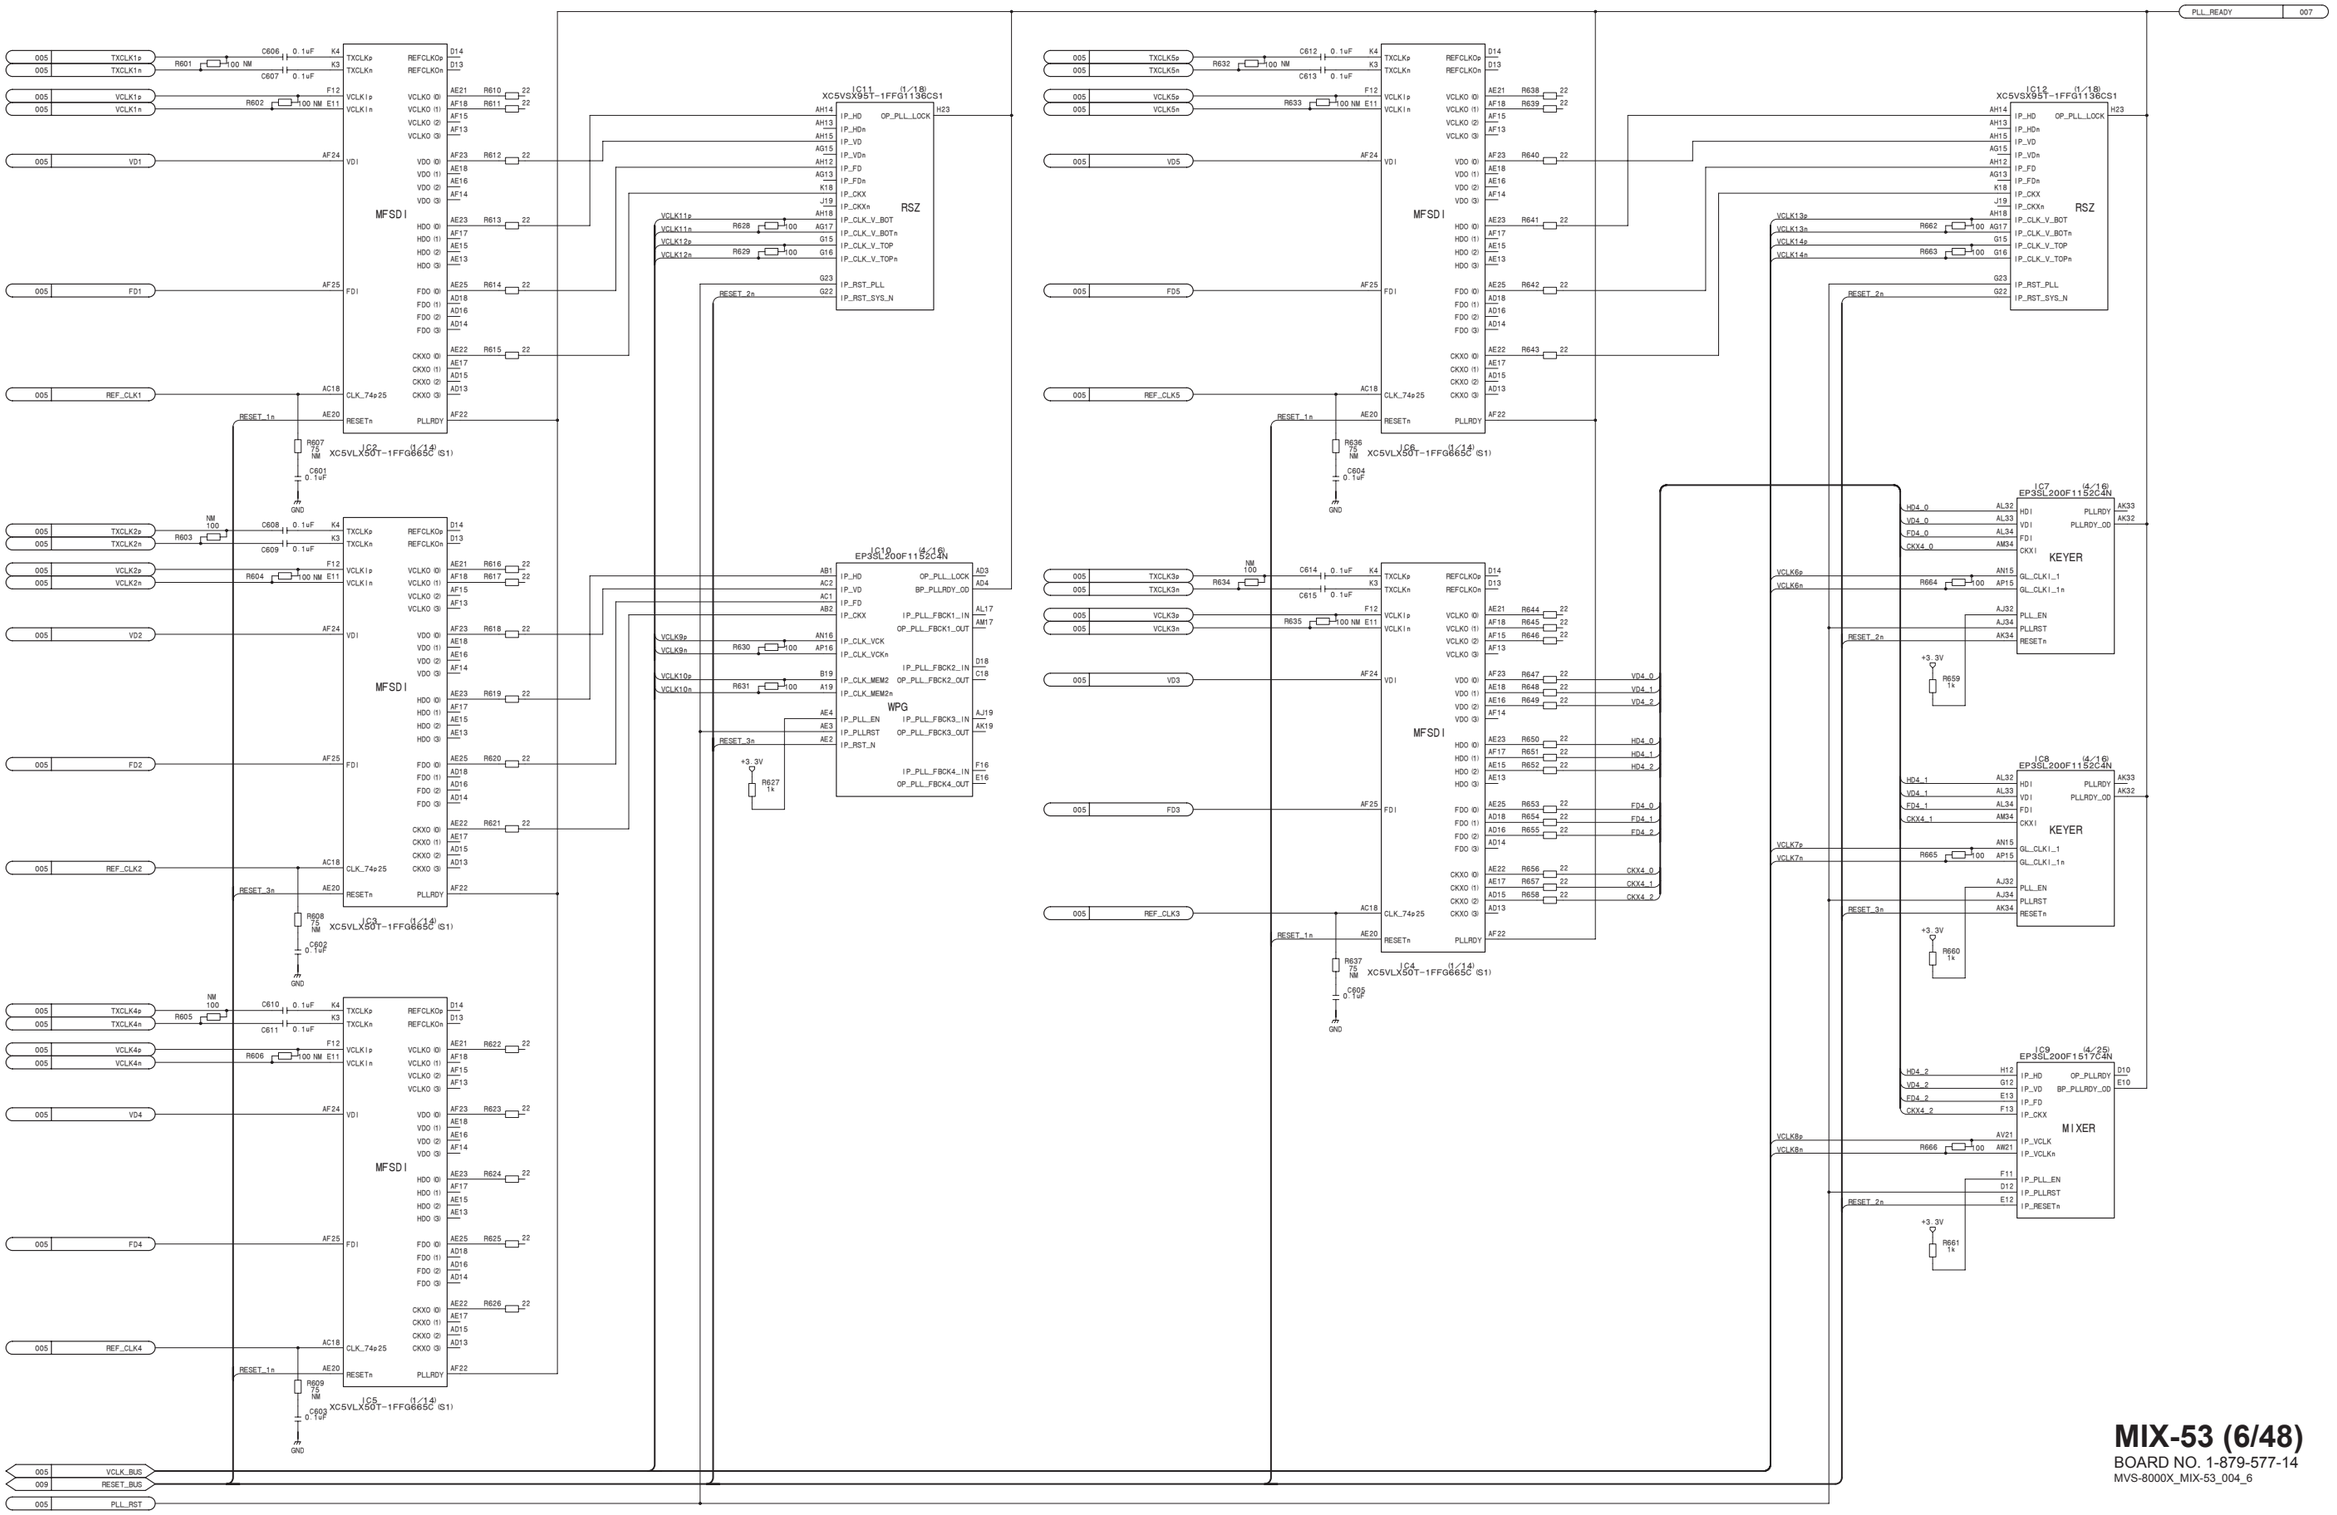

MIX-53 (6/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_6

CPU I/F

008_010_014 CPU_ADRS_BUS
CPU_A26 K14 … CPU_A1 F16
IC1 XC3S200AN-4FTG256C4136 (1/6)
IP_AD<26> … IP_AD<1>

008_011_014 CPU_DATA_BUS
CPU_D31 B15 … CPU_D16 A10
BP_DT<15> … BP_DT<0>

008_009_014 CPU_CTL_BUS
CPU_CS_A E14 … CPU_CS_D E9
IP_CS_A_N … IP_CS_D_N
CPU_CS_PLD E9 → IP_CS_PLD_N
CPU_OE E6 → IP_OE_N
CPU_WE[3] D9 → IP_WE_N<3>
CPU_WE[2] D8 → IP_WE_N<2>
CPU_WE[1] D7 → IP_WE_N<1>
CPU_WE[0] E7 → IP_WE_N<0>

+3.3V, 10k pull-ups: R741 R744 R751 R754 R756 R761 R764 R767 R769 R771 R772 R773 R774 R775

OP_CS_FM_N<1> D14 R702 22
OP_CS_FM_N<0> E16 R703 22
→ CS_FMO_N → CS_FMO_N 012, FPGA_CS_BUS 013

OP_CS_DEV_N<21> N2 R704 22 → CS_DEV21_N
OP_CS_DEV_N<20> M4 R705 22 → CS_DEV20_N
OP_CS_DEV_N<19> M3 R706 22 → CS_DEV19_N
OP_CS_DEV_N<18> L4 R707 22 → CS_DEV18_N
OP_CS_DEV_N<17> L3 R708 22 → CS_DEV17_N
OP_CS_DEV_N<16> L2 R709 22 → CS_DEV16_N
OP_CS_DEV_N<15> L1 R710 22 → CS_DEV15_N
OP_CS_DEV_N<14> K4 R711 22 → CS_DEV14_N
OP_CS_DEV_N<13> K3 R712 22 → CS_DEV13_N
OP_CS_DEV_N<12> K1 R713 22 → CS_DEV12_N
OP_CS_DEV_N<11> J6 R714 22 → CS_DEV11_N
OP_CS_DEV_N<10> J4 R715 22 → CS_DEV10_N

+3.3V, 10k pull-ups: R742 R745 R748 R752 R755 R757 R762 R765 R768 R770

OP_CS_DEV_N<9> J3 R716 22 → CS_DEV9_N
OP_CS_DEV_N<8> J2 R717 22 → CS_DEV8_N
OP_CS_DEV_N<7> J1 R718 22 → CS_DEV7_N
OP_CS_DEV_N<6> H6 R719 22 → CS_DEV6_N
OP_CS_DEV_N<5> H5 R720 22 → CS_DEV5_N
OP_CS_DEV_N<4> H4 R721 22 → CS_DEV4_N
OP_CS_DEV_N<3> H3 R722 22 → CS_DEV3_N
OP_CS_DEV_N<2> H1 R723 22 → CS_DEV2_N
OP_CS_DEV_N<1> G4 R724 22 → CS_DEV1_N
OP_CS_DEV_N<0> G3 R725 22 → CS_DEV0_N

+3.3V, 10k pull-ups: R743 R746 R749 R753 R758 R763 R766

OP_DT_BUS_CTL<3> D15 R726 22
OP_DT_BUS_CTL<2> D16 R727 22
OP_DT_BUS_CTL<1> C15 R728 22
OP_DT_BUS_CTL<0> C16 R729 22
→ DT_BUS_CTL2 → DT_BUS_CTL2 011, DT_BUS_CTL1 011, DT_BUS_CTL0 011

OP_WE_RQ_N A7 R730 22 → WE_RQ_N 009
OP_CPU_WAIT_N C8 R731 22 → CPU_WAIT
OP_CPU_INT_N B8 R732 22 → CPU_INT0 → CPU_INT_BUS 008

+3.3V, 10k pull-ups: R747 R750

XPT_SEL P1 R733 22 → XPT_CTRL 019
XPT_SCL N1 R734 22
XPT_SDA M1 R735 22

CADEC1
R701 0 R1 IP_CC_CTRL_LD
CC_CTRL_LE P6 R736 0
CC_CTRL_CLK T2 R737 0
CC_CTRL_DATA R3 R738 0
CC_CTRL_SYNC_N N3 R739 0
CC_CTRL_GOE P2 R740 0
→ CC_CTRL 005
CC_CTRL_LD

R759 22 NM, R760 22
013 FPGA_WAIT_REQn

DEV CTL

+3.3V, 10k pull-ups: R802 R805 R807 R809 R810 R811 R812 R813

SLOT7 001 R786 22 → IP_SLOT_N<7>
SLOT6 001 R787 22 → IP_SLOT_N<6>
SLOT5 001 R788 22 → IP_SLOT_N<5>
SLOT4 001 R789 22 → IP_SLOT_N<4>
SLOT3 001 R790 22 → IP_SLOT_N<3>
SLOT2 001 R791 22 → IP_SLOT_N<2>
SLOT1 001 R792 22 → IP_SLOT_N<1>
SLOT0 001 R793 22 → IP_SLOT_N<0>

0.1uF: C701 C702 C703 C704 C705 C706 C707 C708

R808 10k → J7 IP_PWR_GD<19>
R849 10k → K5 IP_PWR_GD<16>
R850 10k → L7 IP_PWR_GD<12>

H:ERROR L:OK
004 PWR_1.2V-AVT2_GD
004 PWR_1.2V-APLL2_GD
004 PWR_1.0V-AVCC2_GD
004 PWR_1.2V-AVT1_GD
004 PWR_1.2V-APLL1_GD
004 PWR_1.0V-AVCC1_GD

H:ERROR L:OK
003 PWR_1.1V_3_GD
003 PWR_1.2V_GD
003 PWR_1.0V_3_GD
003 PWR_1.0V_2_GD
003 PWR_1.0V_1_GD
003 PWR_1.1V_2_GD
003 PWR_1.1V_1_GD
003 PWR_1.8V_GD
003 PWR_1.1V_4_GD
003 PWR_2.5V-1_GD
003 PWR_3.3V_GD

IC1 XC3S200AN-4FTG256C4136 (2/6)
IP_PWR_GD<19> … IP_PWR_GD<0>

R806 1k
006 PLL_READY → IP_PLL_READY

RB701 1k → (ND1) D702–D708 SML-D12MBWT86SM
RB702 1k
RB703 1k → (ND0) D710–D716 SML-D12MBWT86SM
RB704 1k
BP_CPU_7SEG1_LED<7> … BP_CPU_7SEG1_LED<0>
BP_CPU_7SEG0_LED<7> … BP_CPU_7SEG0_LED<0>

(ND1) (ND0) Front Side

OP_STATE_LED1 R13
OP_STATE_LED0 R14
OP_BECON_LED T13
OP_POWER_LED1 T14

IC701 TC74VHC04FT (EKJ)
C709 0.1uF

D718 STATUS Normal: OFF — SML-522MUBWT86PQ
D721 BECON Normal: OFF BLUE — SML-412BC6TT86
D719 POWER Normal: ON — SML-522MUBWT86PQ
D720 PLL_UNLOCK Normal: OFF RED — SML-D12UBWT86

CADEC1
OP_CCAD_PWR_OK A6
IP_CCAD_WAIT D6
BP_CCAD<7> C6
BP_CCAD<6> B6
BP_CCAD<5> C5
BP_CCAD<4> A5
BP_CCAD<3> B4
BP_CCAD<2> A4
BP_CCAD<1> B3
BP_CCAD<0> A3

+3.3V, 10k pull-ups: R832 R834 R835 R836 R837 R838 R839 R846 R847 R848

R822 R823 R824 R825 R826 R827 R828 R829 R830 R831 0

CCAD_PWR_OK
CCAD_WAIT
CCAD [7] CCAD [6] CCAD [5] CCAD [4] CCAD [3] CCAD [2] CCAD [1] CCAD [0]
CADEC2_BUS 014
CAD1_DONE
R833 10k → R832 GND

CCAD [0] : ALL CONF DONE from CADEC2

R776 4.7k R778 0 NM R780 0 R782 4.7k R784 0 NM R794 0 R796 0 R798 0 R800 0 NM R803 0

M [2:0] =011
Internal Master SPI Mode

VS [2:0] =101
SPI Flash Read Comand = read
Maximam CLK rate: 33MHz

R779 0 NM R777 0 NM R783 4.7k NM R781 0 NM R795 0 NM R785 0 NM R799 0 NM R797 0 NM R804 0 NM R801 0

IC1 XC3S200AN-4FTG256C4136 (6/6)
PROG_B SUSPEND PUDC_B INIT_B M2 M1 M0 VS2 VS1 VS0 IP_L04P_3 IP_L04N_3/VREF_3 IP_0 IP_0 IO_L14P_0
DONE T15

R816 330 → CAD1 D701 RED SML-D12UBWT86
R819 1k
R821 0

CADEC1
BP_TEST<4> P8 R814 10k → CL704 0.8
BP_TEST<3> N9 R815 10k → CL703 0.8
BP_TEST<2> P9 R817 10k → CL702 0.8
BP_TEST<1> R9 R818 10k → CL701 0.8
BP_TEST<0> T9 R820 10k → CL700 0.8
R853 NM 0, R852 0

CADEC (VCC&GND)

IC1 XC3S200AN-4FTG256C4136 (5/6)
C710 10uF 6.3V, C713 10uF 6.3V, C715 10uF 6.3V → +1.2V
C711 10uF 6.3V, C714 10uF 6.3V, C716 10uF 6.3V → +3.3V
C712 10uF 6.3V → +3.3V
C717–C734 0.1uF / 0.01uF
VCCINT A1 A16 B7 B11 C3 C14 E5 E12 F2 F6 G8 G10 G15 H9 J8 K2 K7 K9 L11 L15 M5 M12 P3 P14 R6 R10 T1 T16
CADEC1 GND
VCCO_0 B5 B9 B13 E8 E15 H12 J15 N15 M9 R4 R8 R12 D2 H2 J5 M2 P3
VCCO_1 E11 F5 L12 M6
VCCO_2 VCCO_3
VCCAUX F5 L12 M6
GND

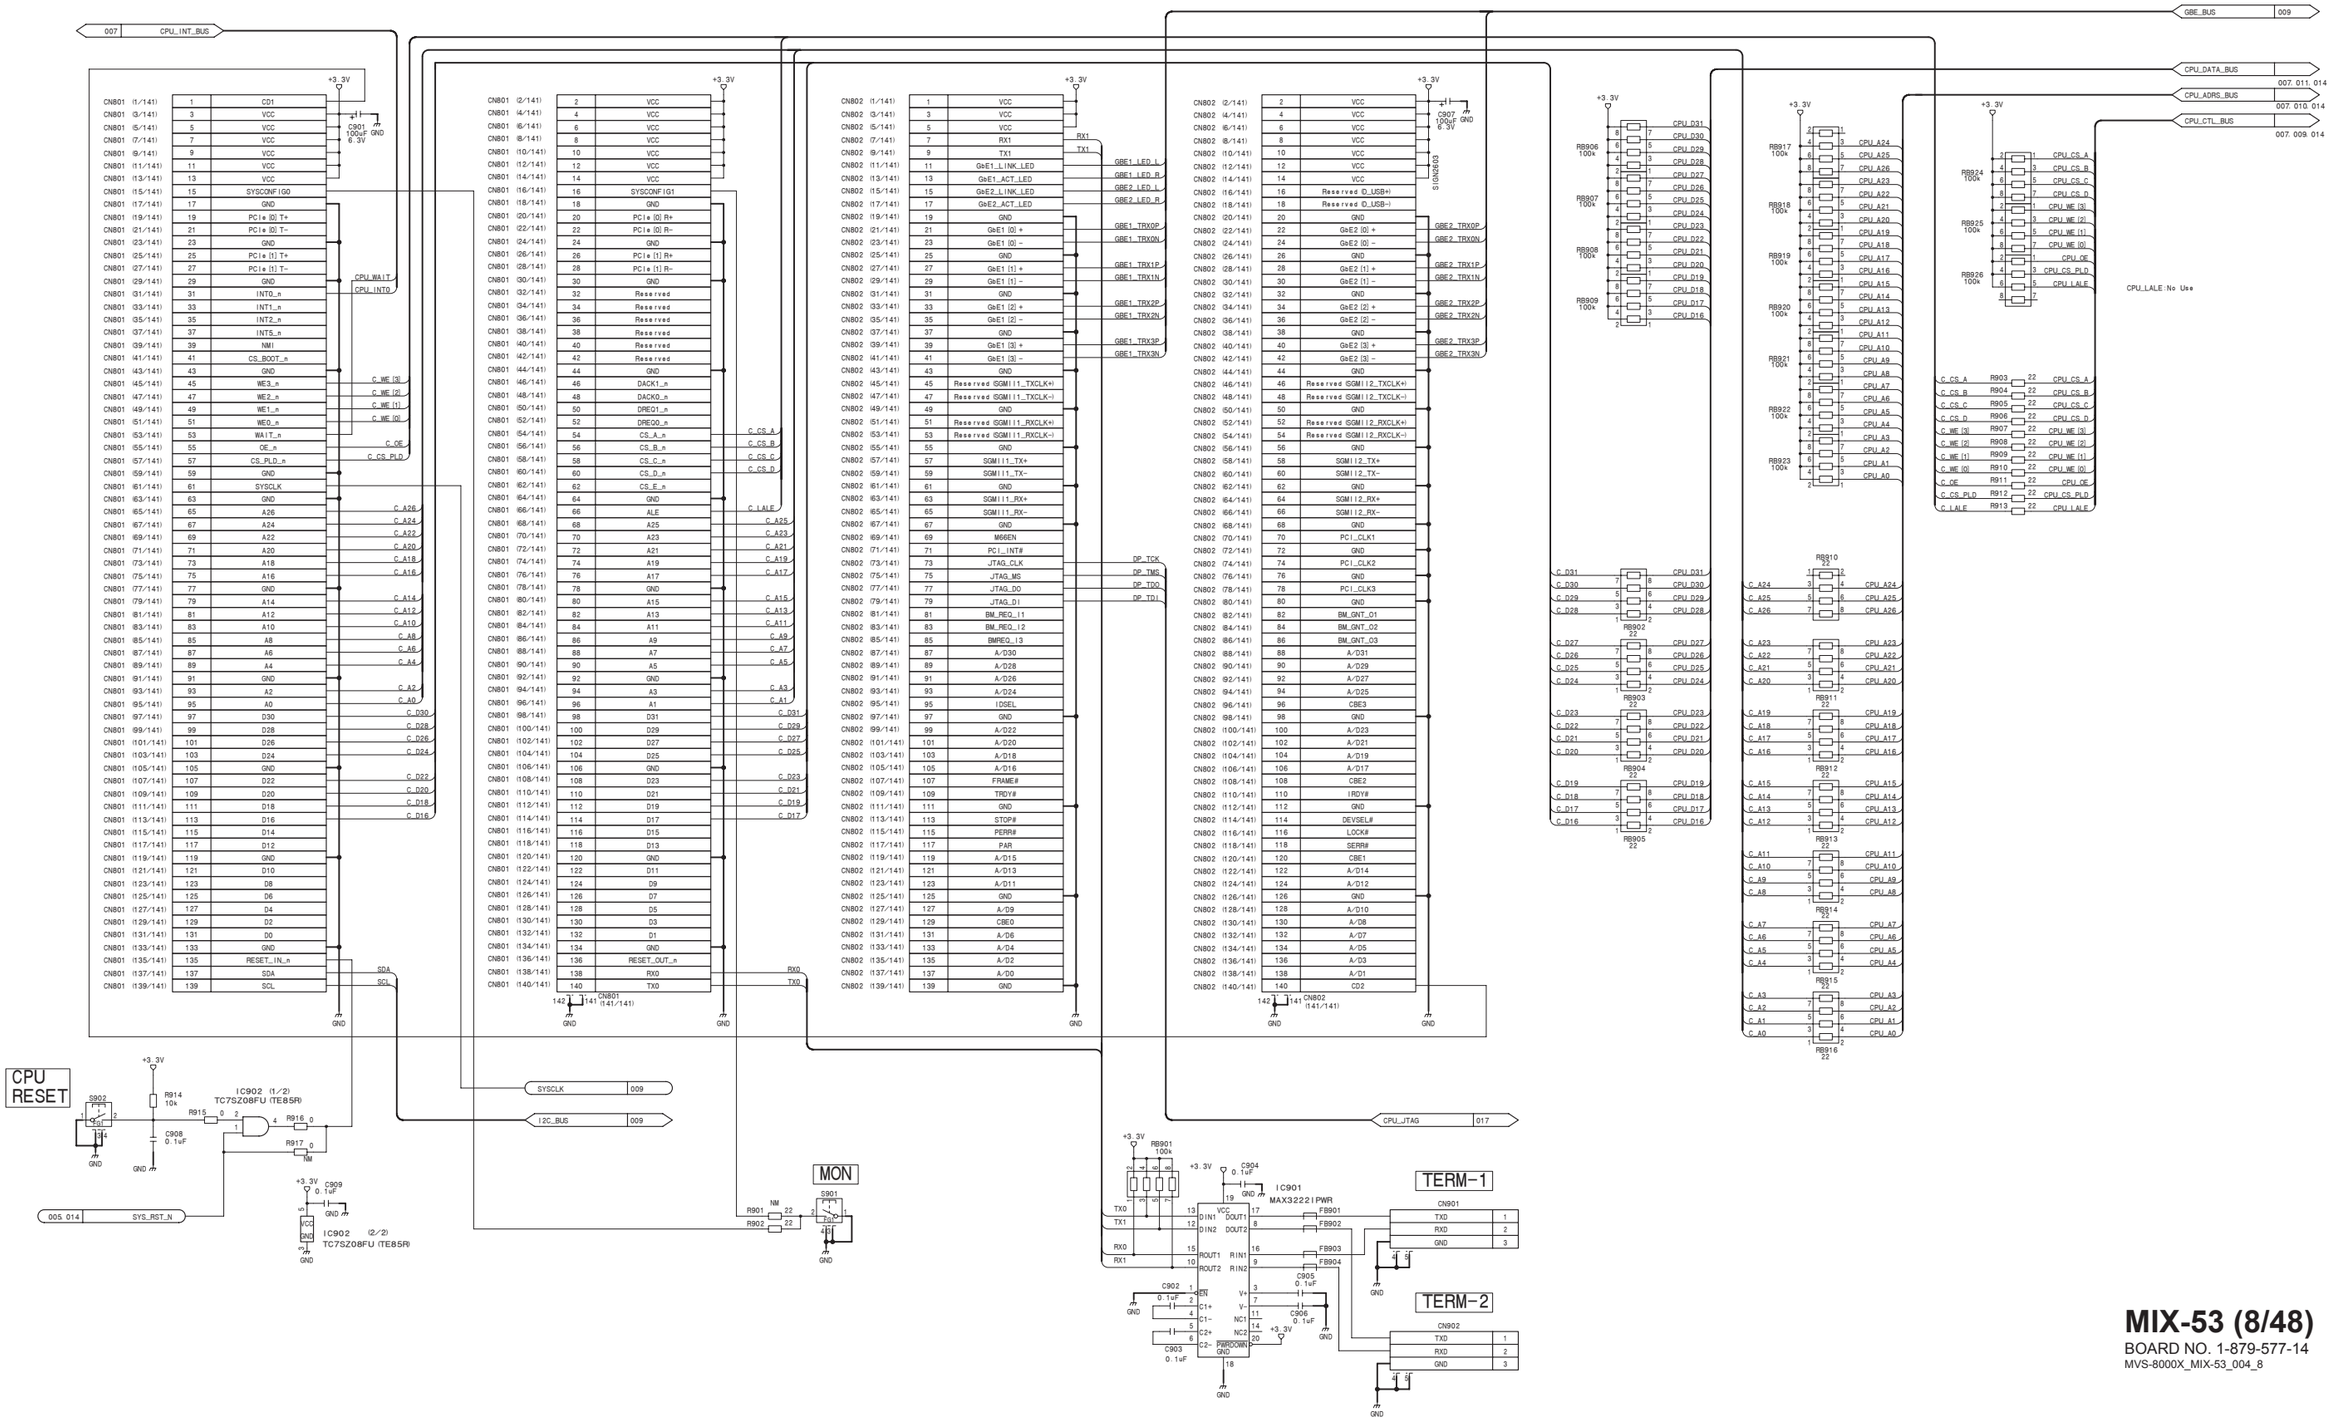

MIX-53 (8/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_8

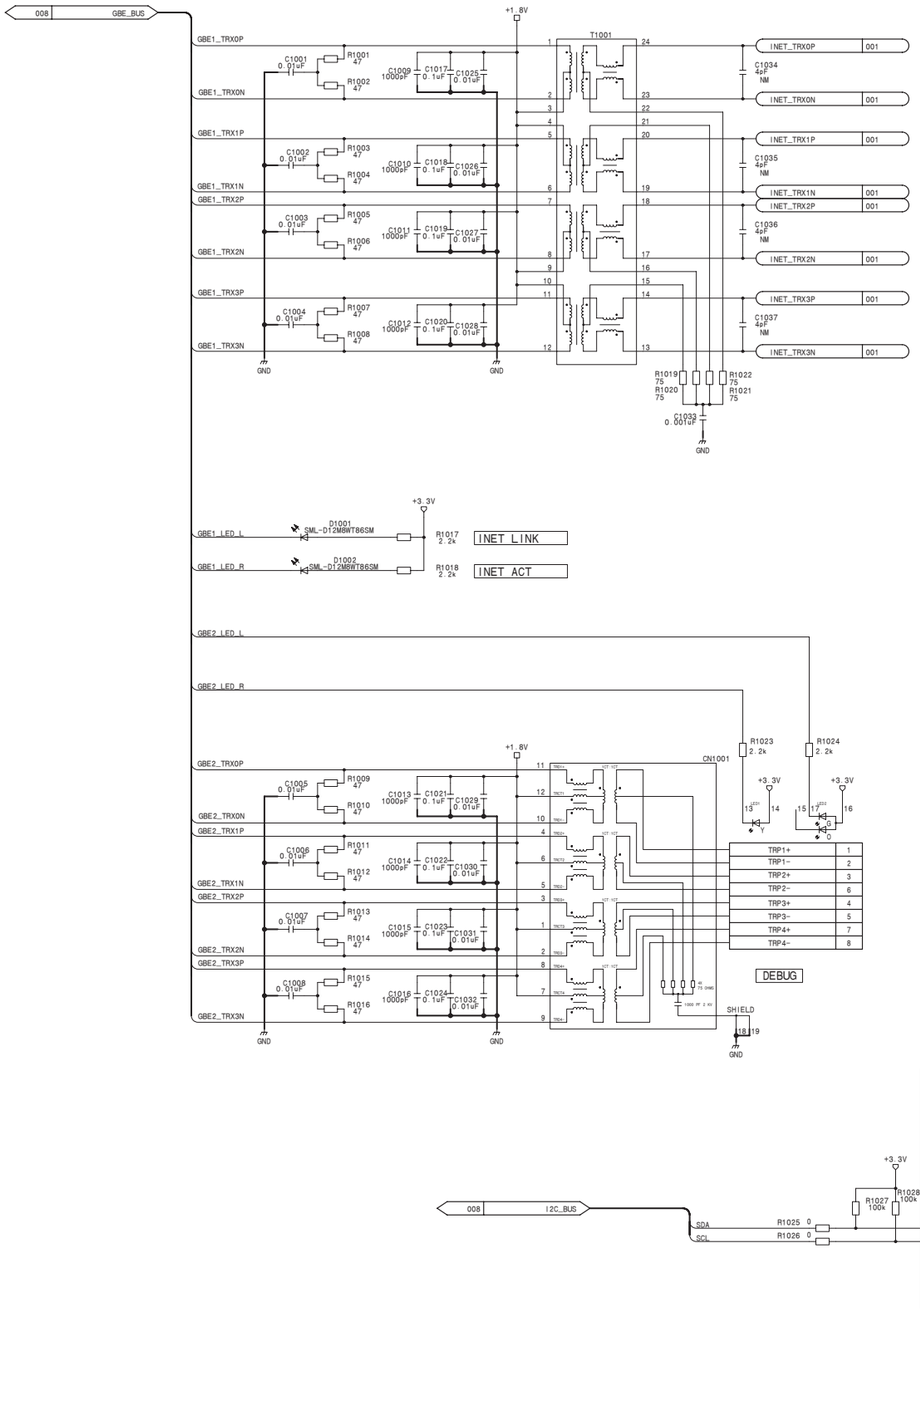

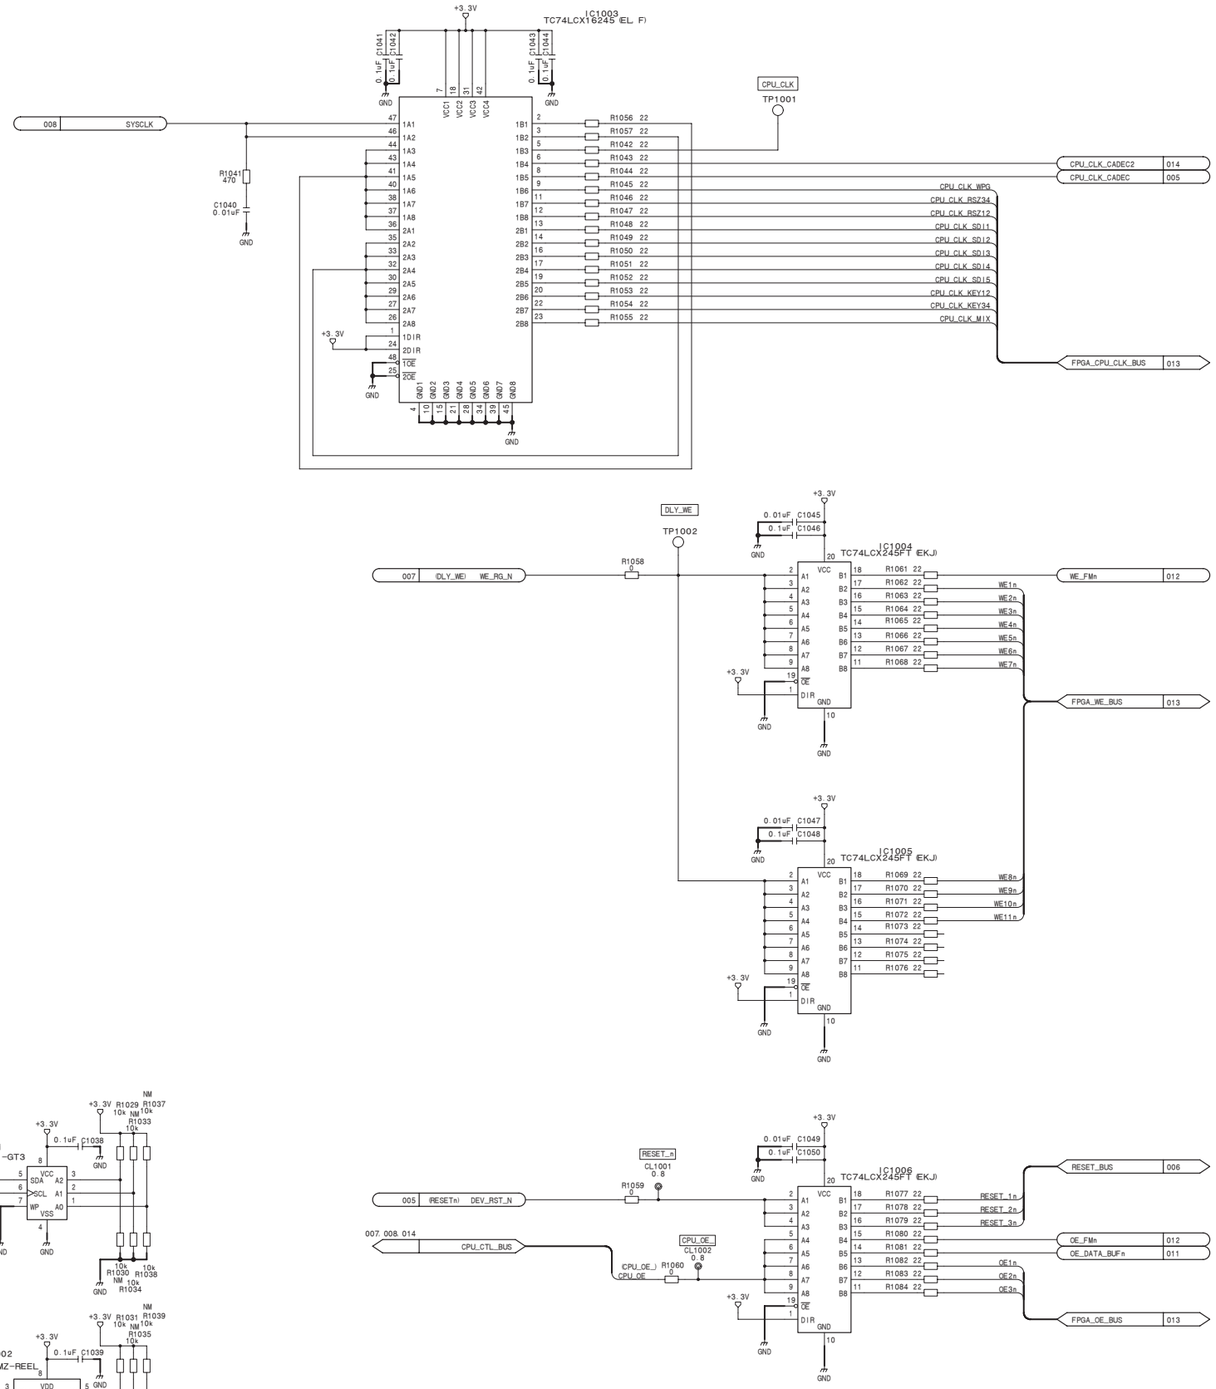

MIX-53 (9/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_9

MIX-53 (10/48) **SUFFIX: -14**

Fm: CPU Module

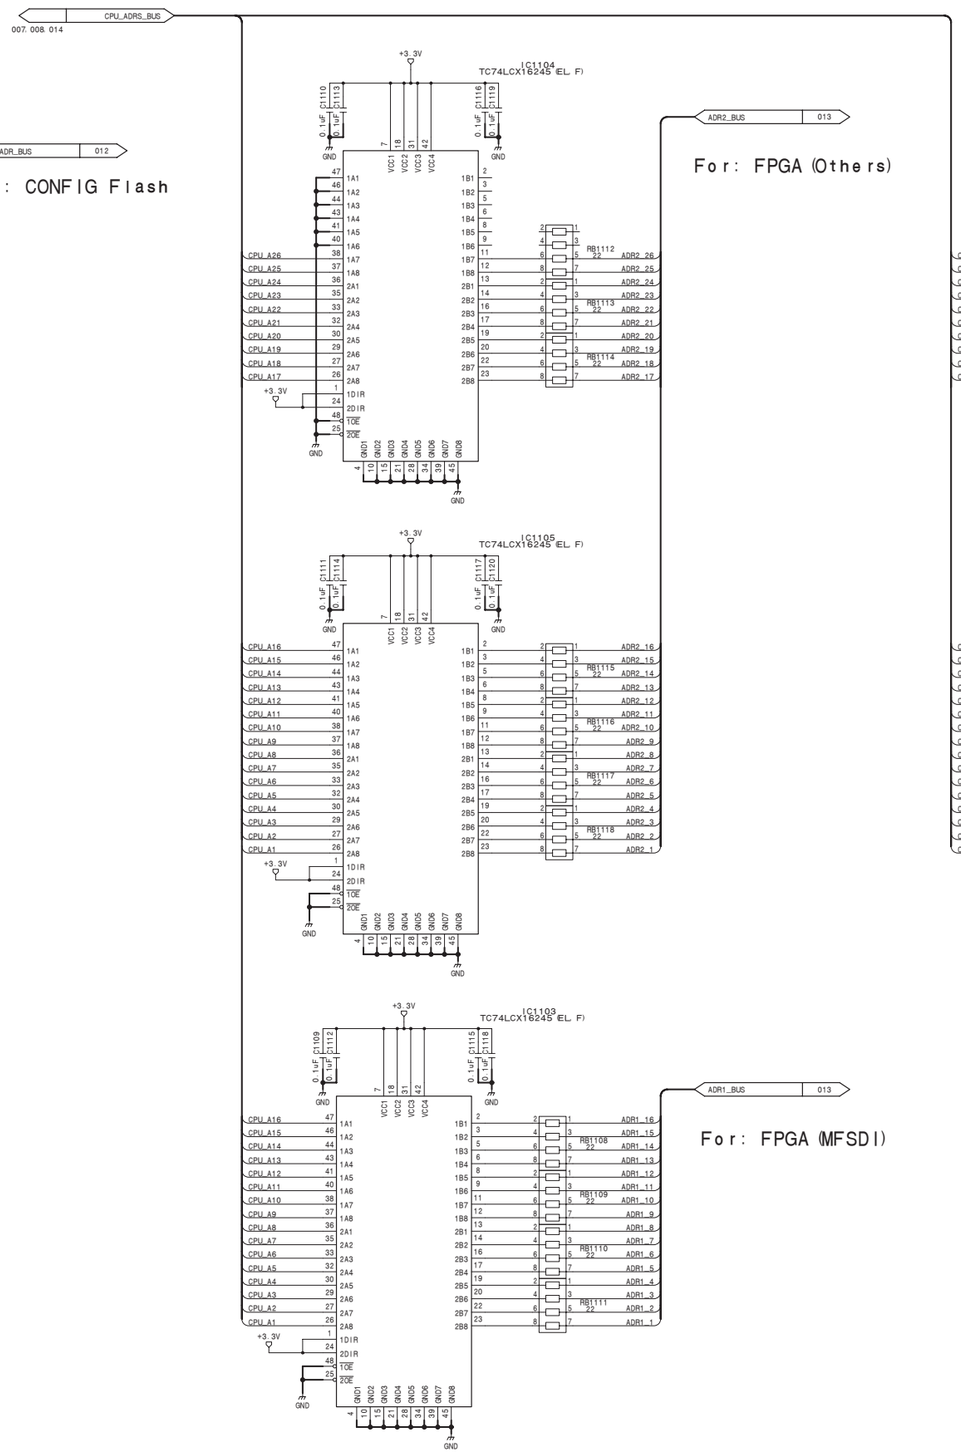

MIX-53 (10/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_10

MIX-53 (11/48) **SUFFIX: -14**

Fm: CPU Module

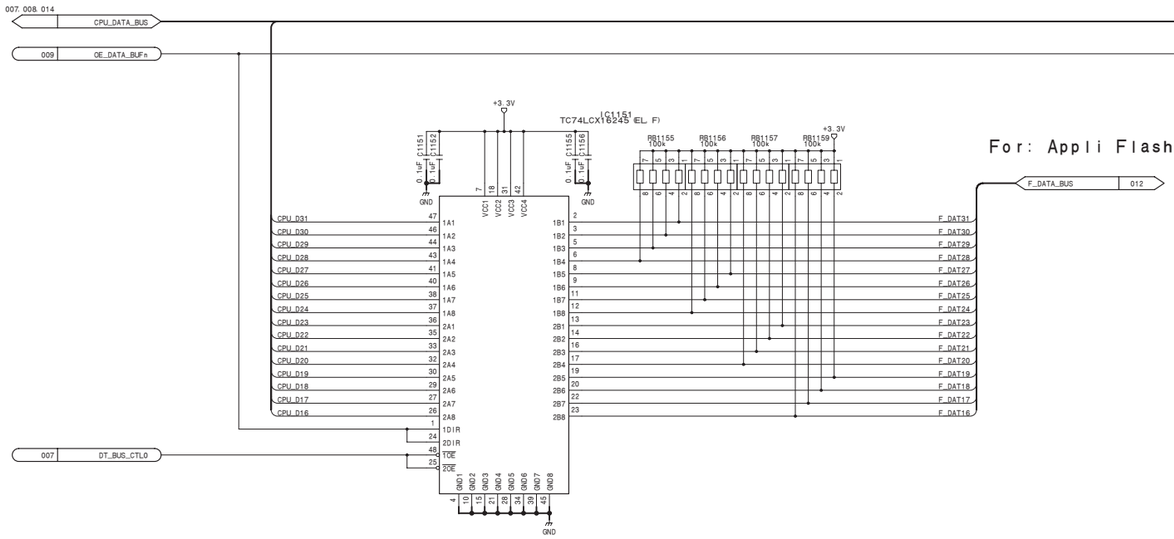

For: Appli Flash

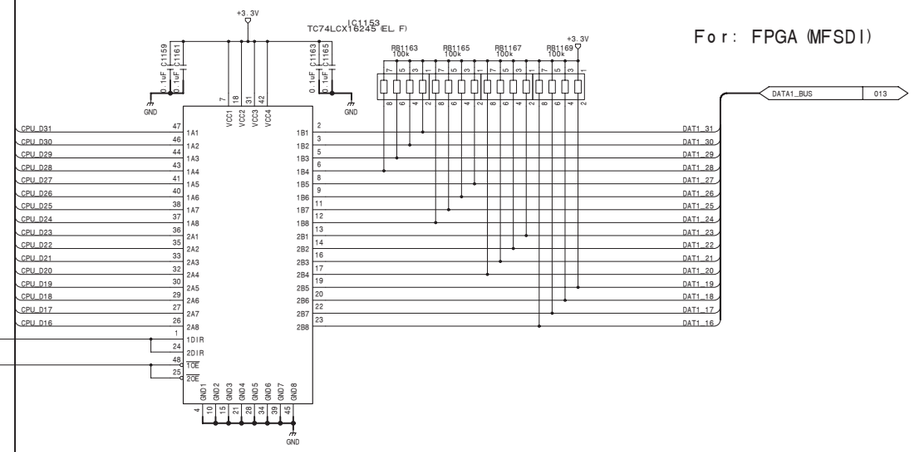

For: FPGA (MFSDI)

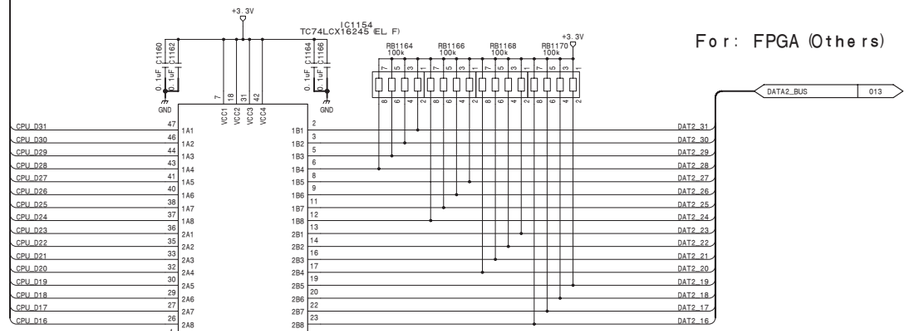

For: FPGA (Others)

Fm: CADEC2

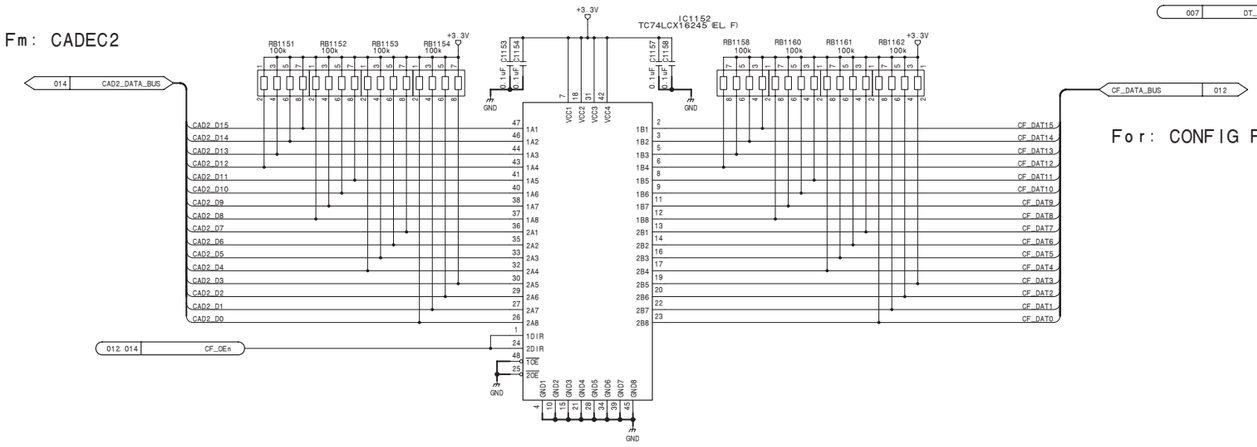

For: CONFIG Flash

MIX-53 (11/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_11

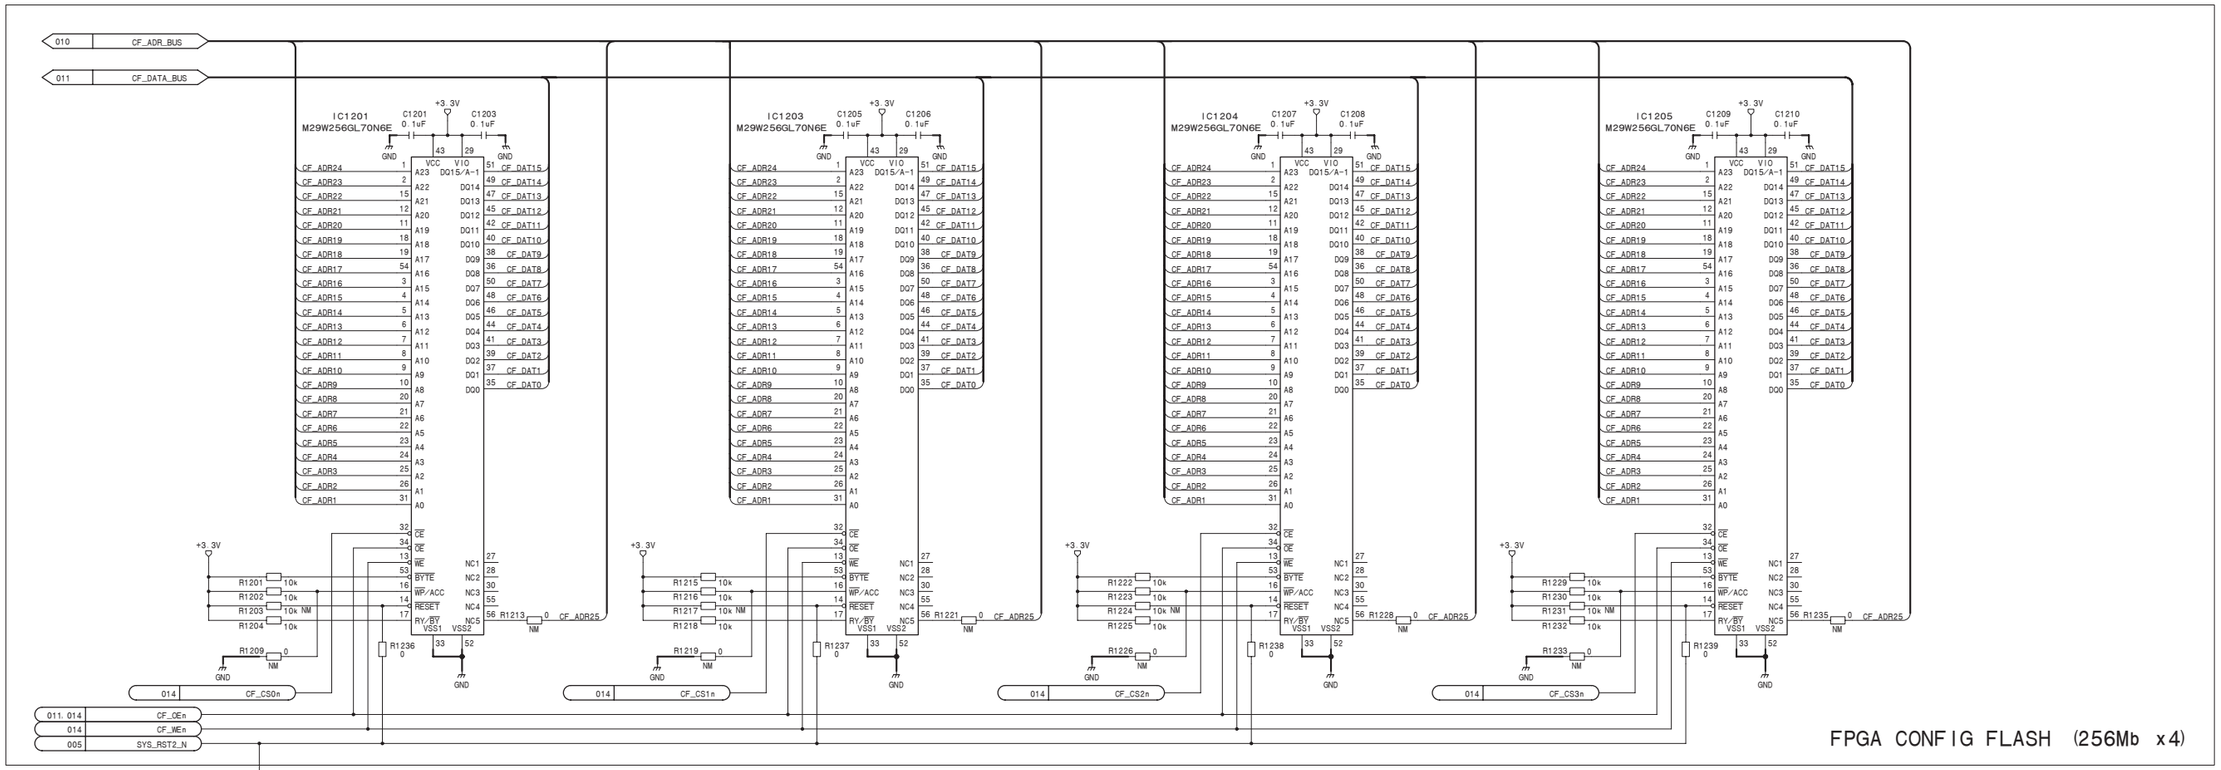

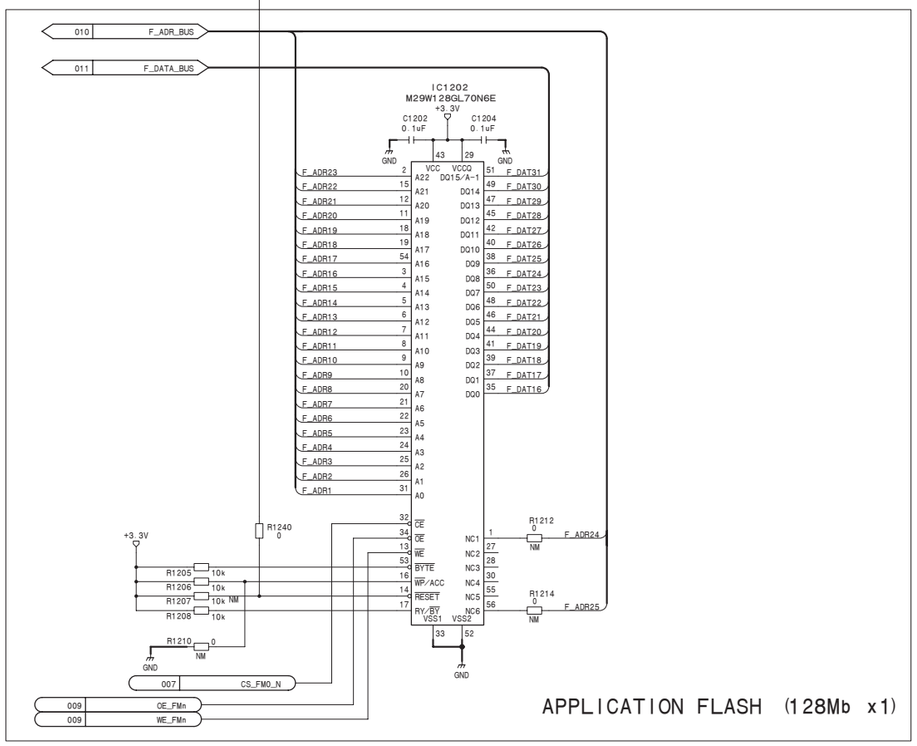

MIX-53 (12/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_12

MIX-53 (13/48)

SUFFIX: -14

MIX-53 (13/48)

SUFFIX: -14

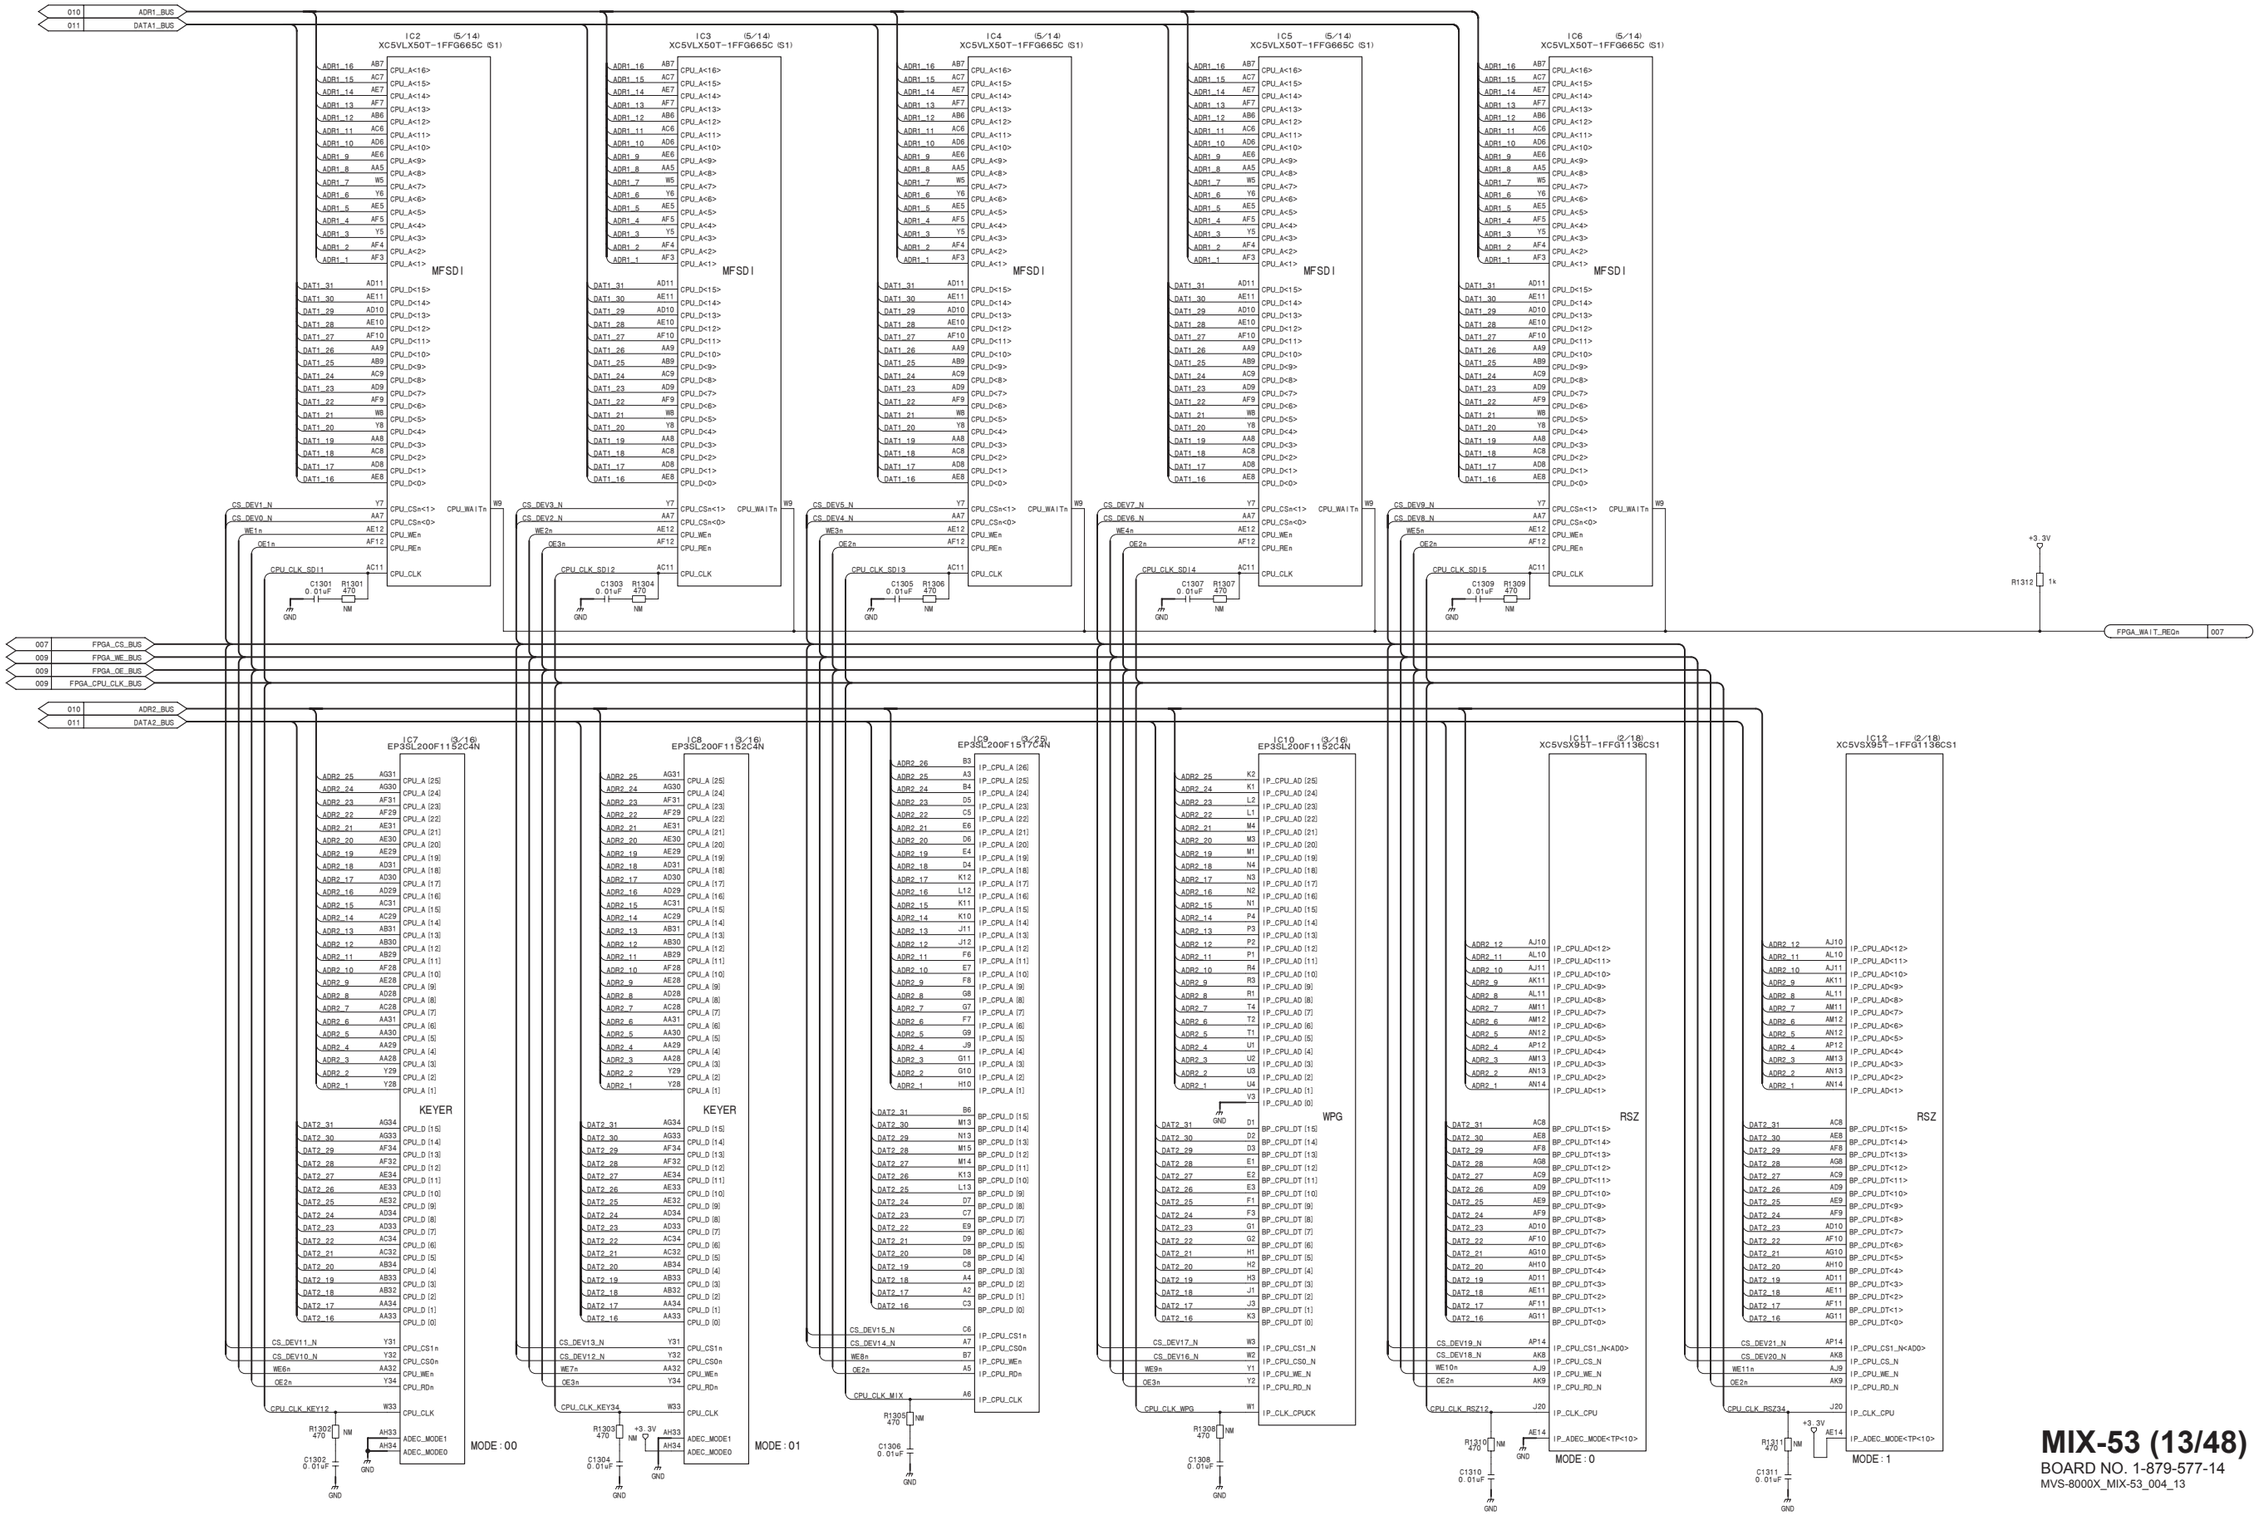

MIX-53 (13/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_13

MIX-53 (14/48)
SUFFIX: -14

MIX-53 (14/48)
SUFFIX: -14

CPU I/F

CPU_ADRS_BUS 007. 008. 010

CPU_DATA_BUS 007. 008. 011

CPU_CTL_BUS 007. 008. 009

IC21 XC3S200AN-4FTG256C4136 (1/6)

CAD2_ADRS_BUS 010

CAD2_DATA_BUS 011

CF_OEn 011, 012
CF_WEn 012
CF_CS0n 012
CF_CS1n 012
CF_CS2n 012
CF_CS3n 012

VD21 005
FD21 005
SYS_RST_N 005, 008
VCLK21p 005
VCLK21n 005
REF_CLK21 005
CPU_CLK_CADEC2 009

CCAD [7] CCAD [6] CCAD [5] CCAD [4] CCAD [3] CCAD [2] CCAD [1] CCAD [0] CAD1_DONE

CCAD [0] : ALL CONF DONE to CADEC1

CCAD_WAIT

CADEC2_BUS 007

ALT_CNF_CONF_DONE 015
ALT_CNF_NSTATUS 015
XLX_CNF_CONF_DONE 016
XLX_CNF_INIT_BUS 016

ALT_CNF_DATA_BUS 015
ALT_CNF_DCLK_BUS 015
ALT_CNF_NCONFIG_BUS 015
XLX_CNF_DATA_BUS 016
XLX_CNF_CCLK 016
XLX_CNF_CS_BUS 016
XLX_CNF_RPGM 016
XLX_CNF_WRITE 016

CADEC2

CADEC2 CONF_DONE INPUT

CNF ERR

M [2:0] =011
Internal Master SPI Mode

VS [2:0] =101
SPI Flash Read Comand = read
Maximam CLK rate: 33MHz

CADEC (VCC&GND)

IC21 XC3S200AN-4FTG256C4136 (5/6)

IC21 XC3S200AN-4FTG256C4136 (6/6)

IC21 XC3S200AN-4FTG256C4136 (3/6)

4-200 (a)

4-200 (a)

MIX-53 (14/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_14

MVS-8000X/7000X

MIX-53 (15/48)
SUFFIX: -14

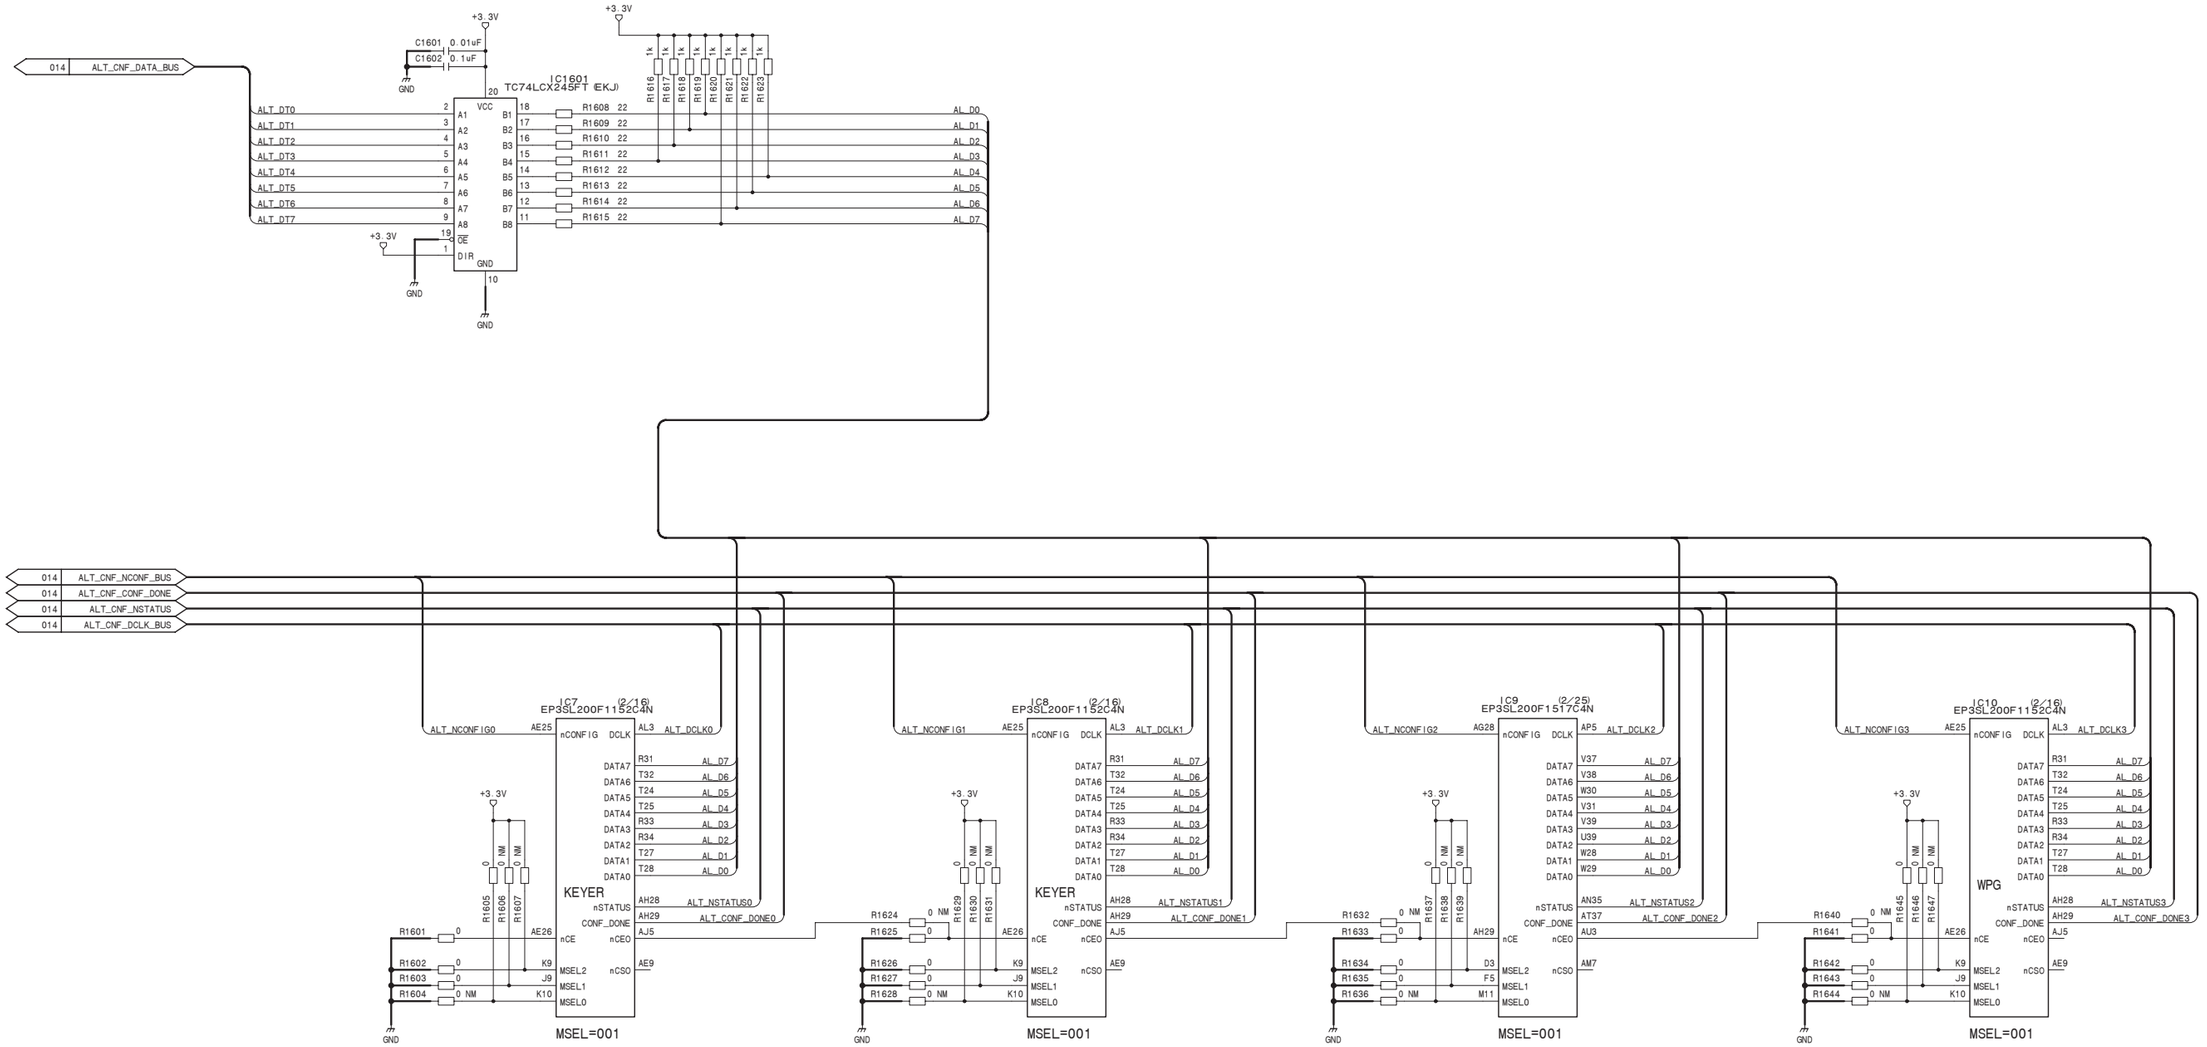

MIX-53 (15/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_15

MIX-53 (16/48) **SUFFIX: -14**

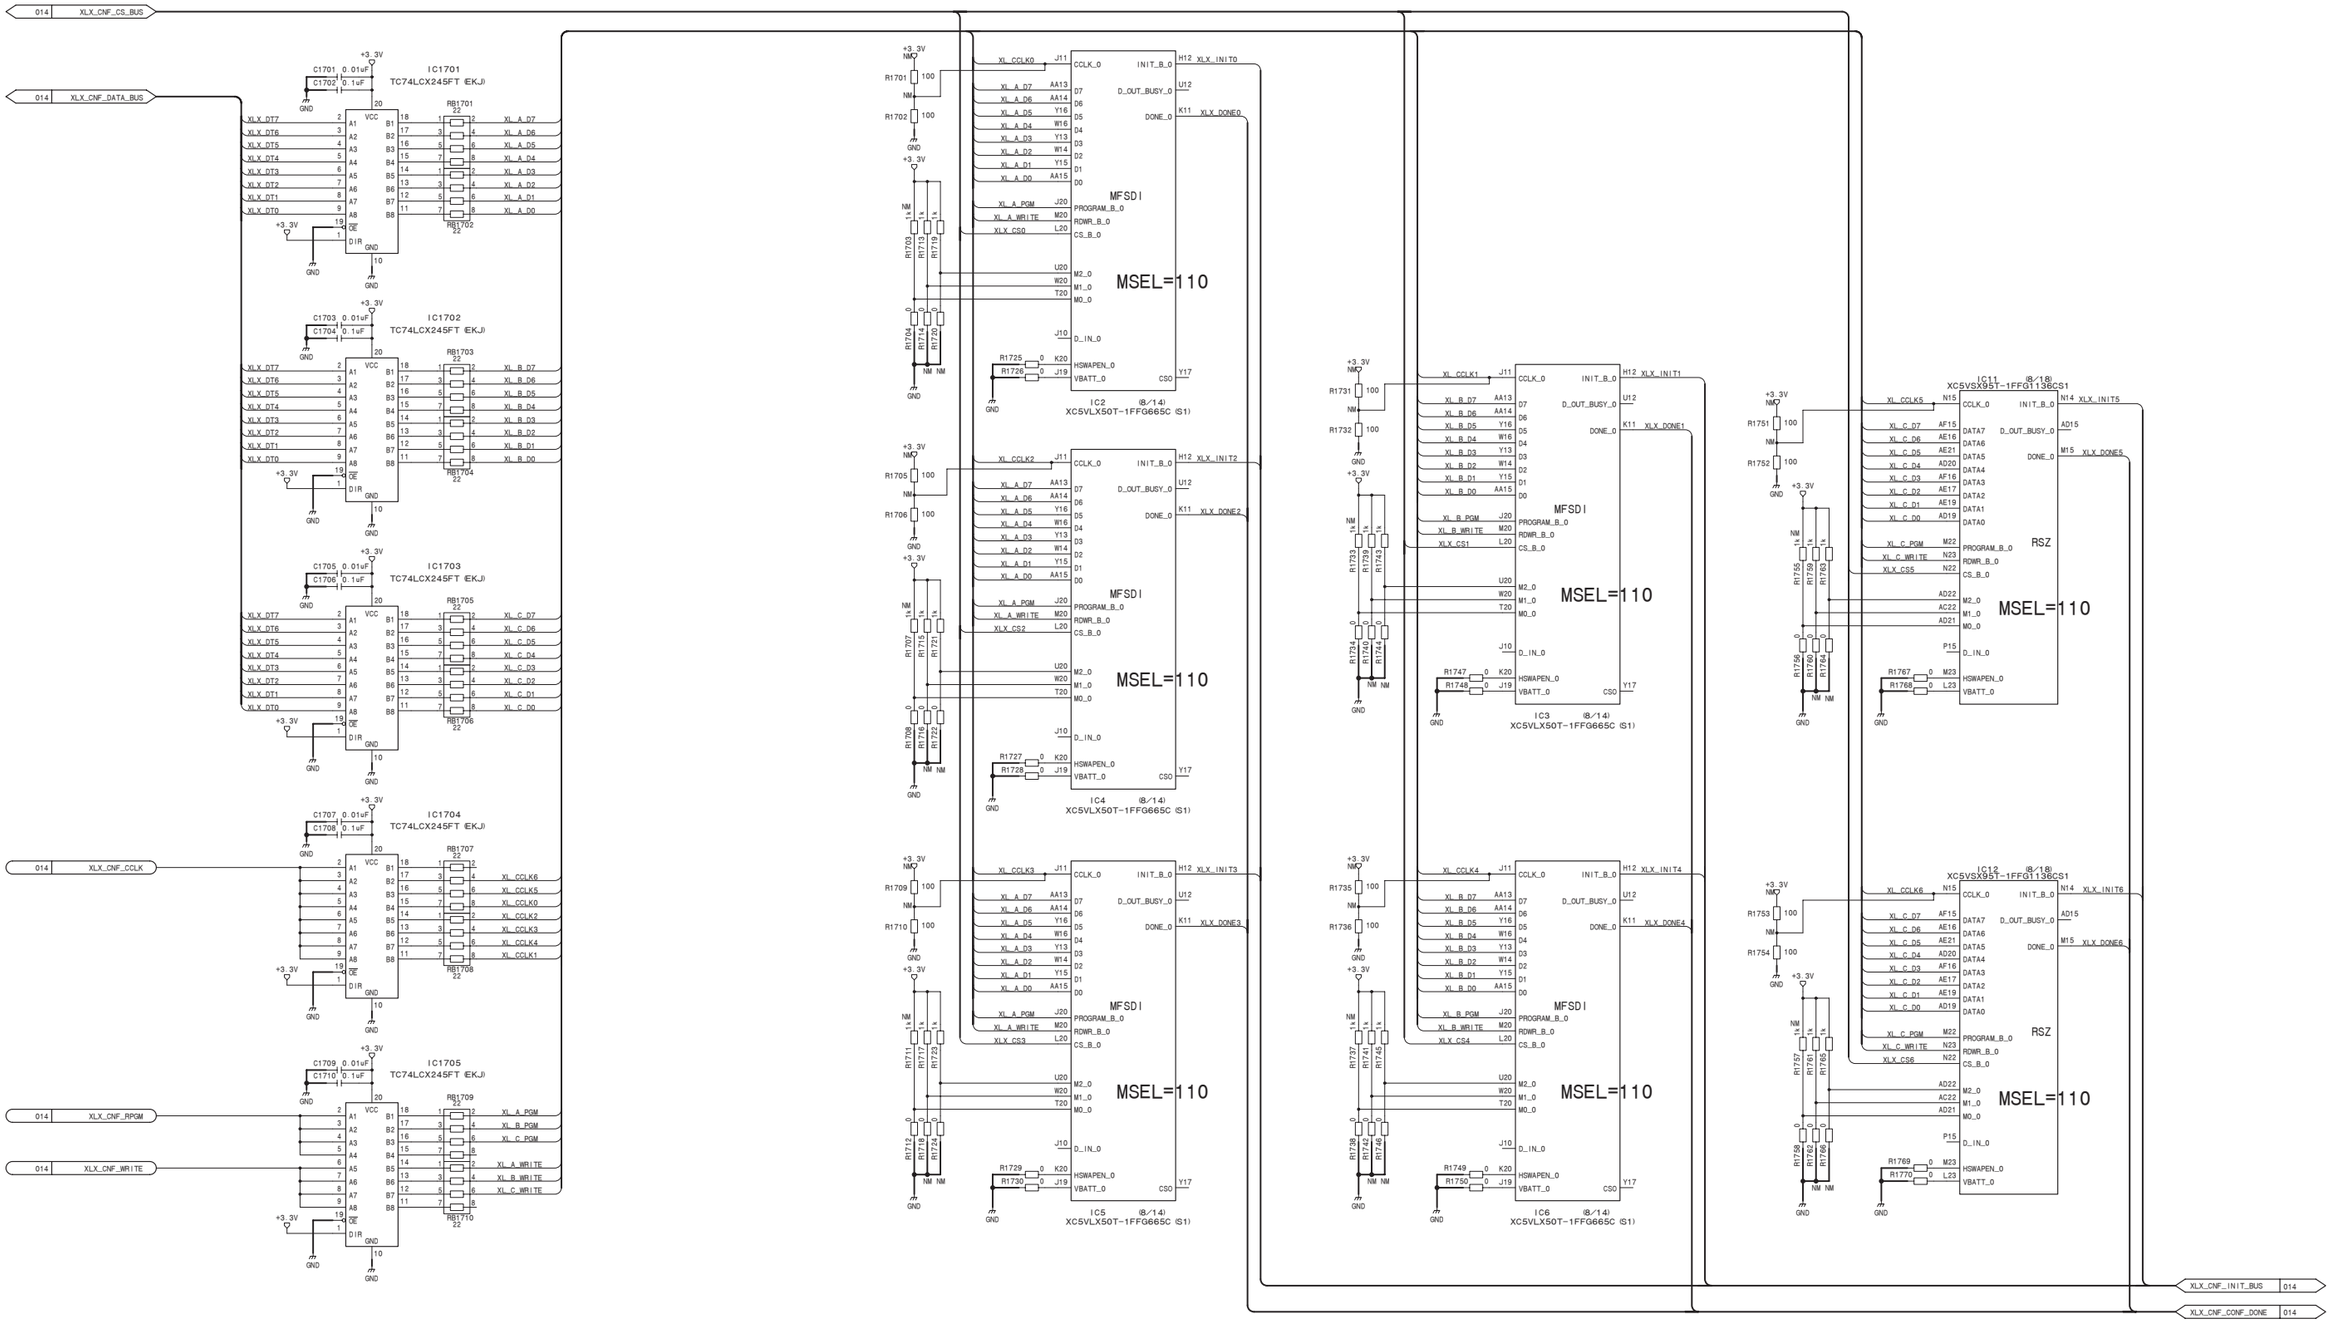

MIX-53 (16/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_16

MIX-53 (17/48)

SUFFIX: -14

MIX-53 (17/48)
SUFFIX: -14

JTAG_CHAIN \ Ref	R1845	R1842	R1848	R1849	R1852	R1853	R1854
DEFAULT	0	X	X	0	X	0	X
CADEC1, 2	0	X	X	X	0	X	0
FULL	X	0	0	0	X	0	X

(Note)
O: Mount
X: No mount

EPR2

CN1801
1 VCC
2 TRST/DATAOUT
3 TDI/ASDI
4 TDO/C_D
5 TMS/nCONF
6 TCK/DCLK
7 MODE
8 GND
9 nCE
10 nCS

Angle type

IC1801 TC74LCX245FT (EKJ)
IC1802 TC74LCX245FT (EKJ)
IC1803 TC74LCX245FT (EKJ)

1: CADEC1
2: CADEC2
3: RSZ12/34/CPU
4: KEYER34/WPG
5: SDI (IC3)
6: SDI (IC5) /SDI (IC6)
7: KEYER12/MIXER
8: SDI (IC2) /SDI (IC4)

IC1 CADEC1 (4/6) XC3S200AN-4FTG256C4136
IC21 CADEC2 (4/6) XC3S200AN-4FTG256C4136
CPU Module
IC12 RSZ34 (14/18) XC5VSX95T-1FFG1136CS1
IC10 WPG (1/16) EP3SL200F1152C4N
IC3 MFSDI_IC3 MFSDI (7/14) XC5VLX50T-1FFG665C (S1)
IC6 MFSDI_IC6 MFSDI (7/14) XC5VLX50T-1FFG665C (S1)
IC8 KEYER34 (1/16) EP3SL200F1152C4N
IC9 MIXER (1/25) EP3SL200F1517C4N
IC5 MFSDI_IC5 MFSDI (7/14) XC5VLX50T-1FFG665C (S1)
IC4 MFSDI_IC4 MFSDI (7/14) XC5VLX50T-1FFG665C (S1)
IC2 MFSDI_IC2 MFSDI (7/14) XC5VLX50T-1FFG665C (S1)
IC7 KEYER12 (1/16) EP3SL200F1152C4N
IC11 RSZ12 (14/18) XC5VSX95T-1FFG1136CS1

CPU_JTAG 008

MIX-53 (17/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_17

MIX-53 (18/48) **SUFFIX: -14**

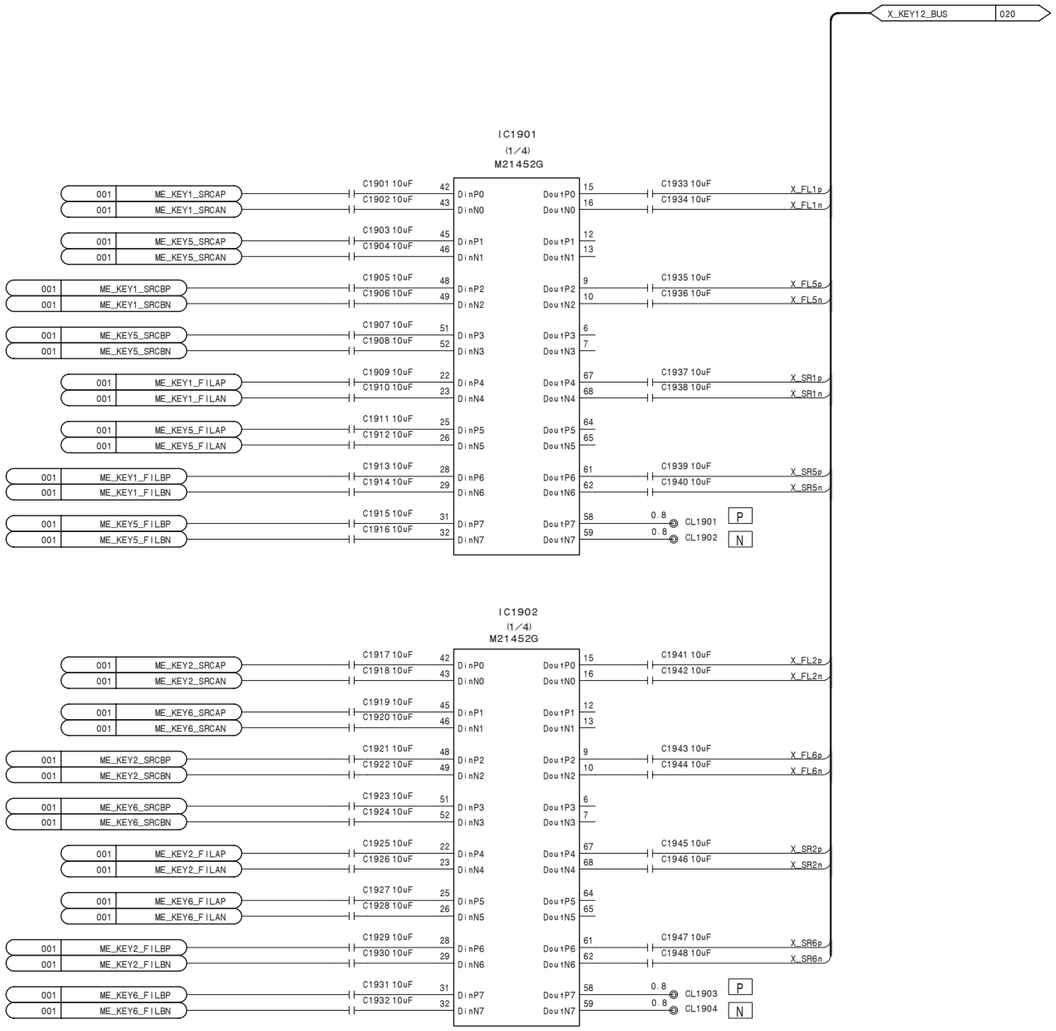

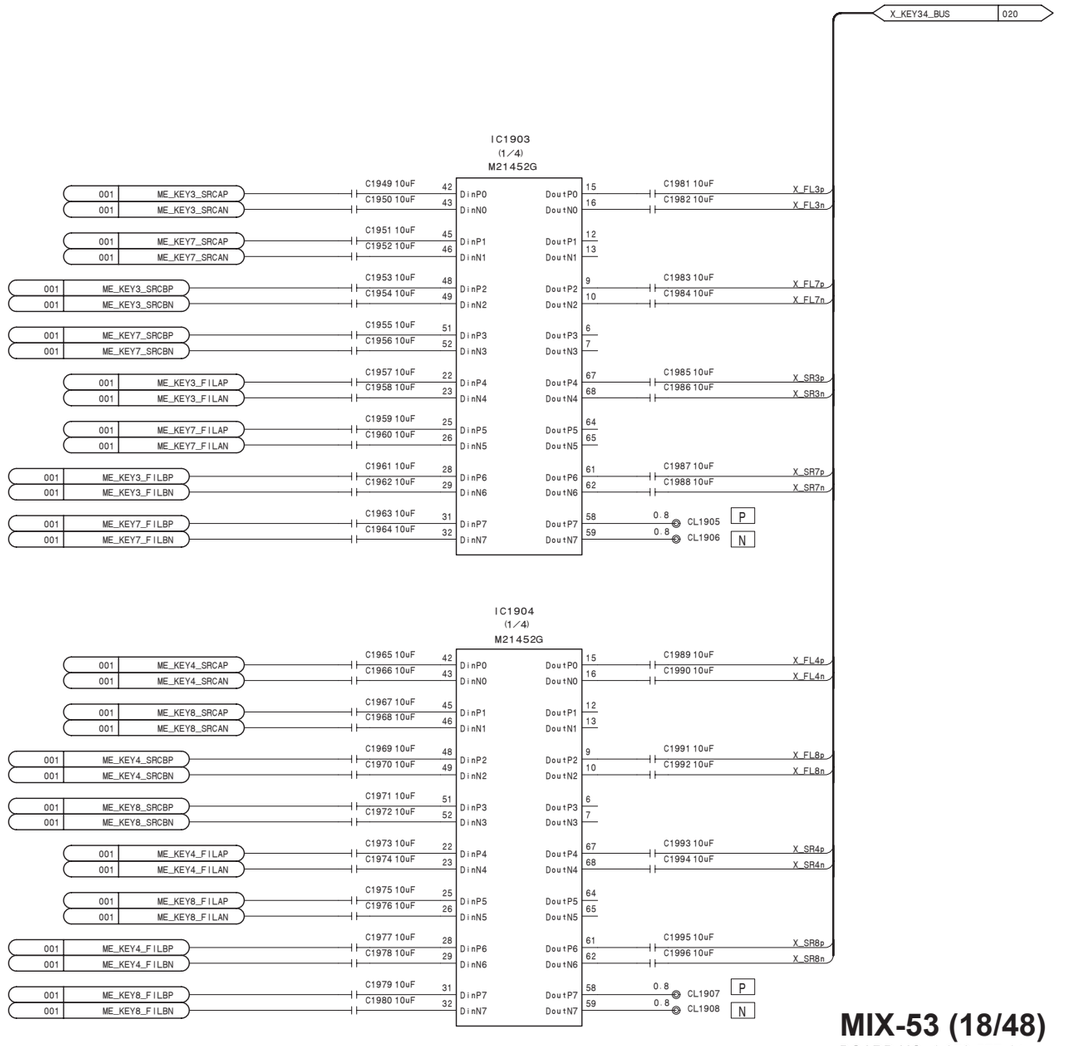

MIX-53 (18/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_18

MIX-53 (19/48)

SUFFIX: -14

MIX-53 (19/48)

SUFFIX: -14

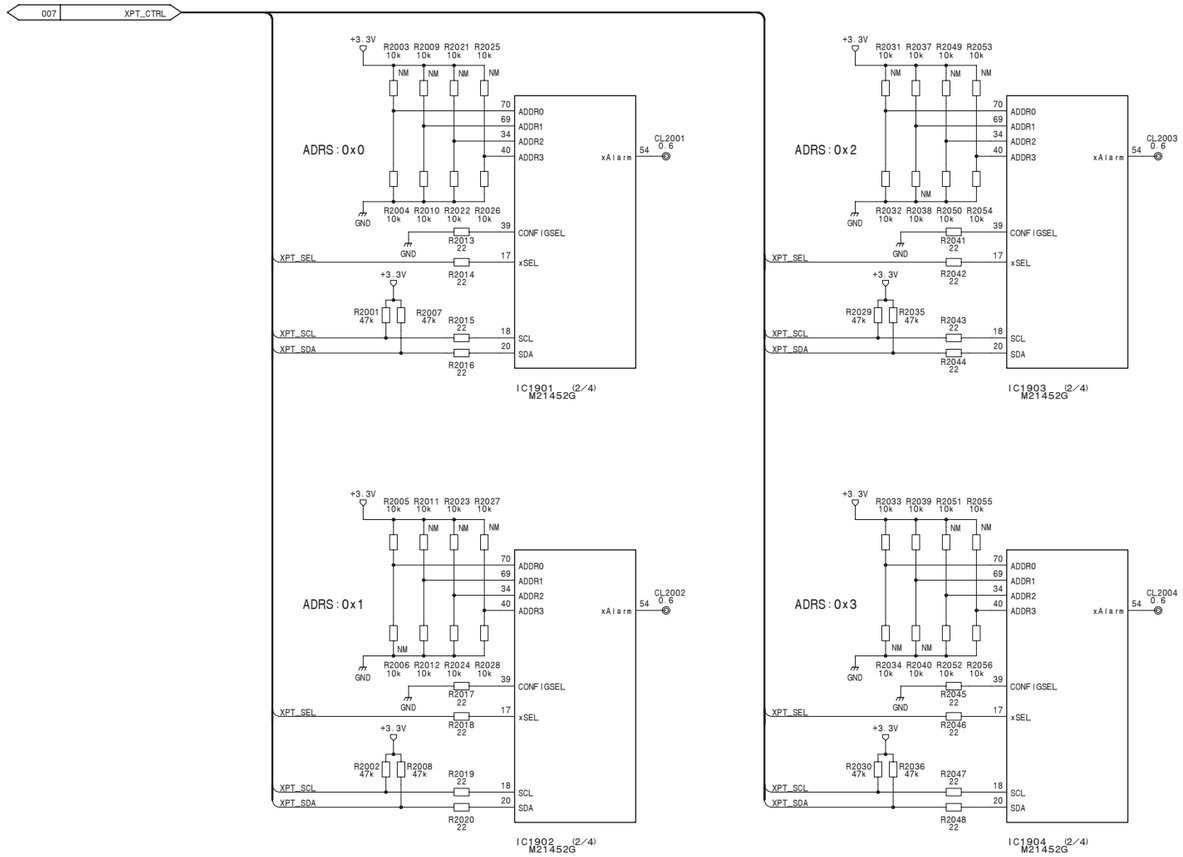

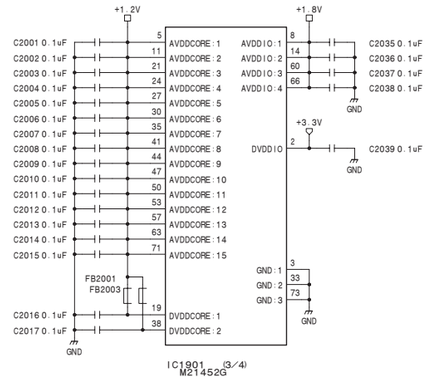

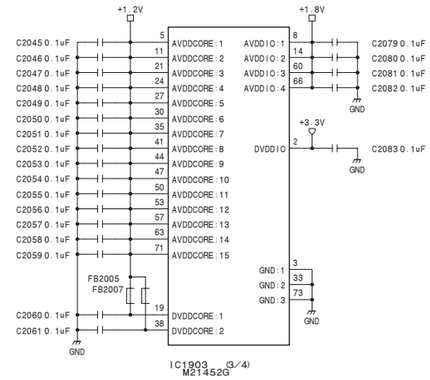

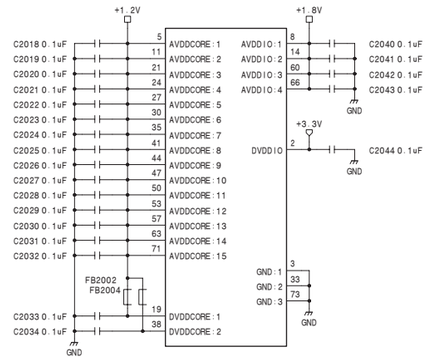

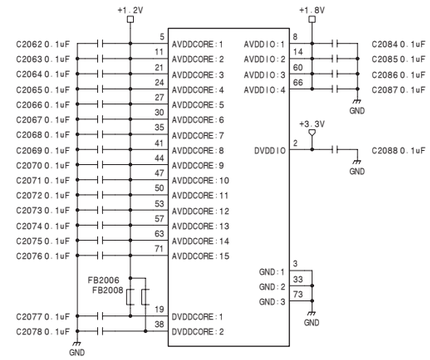









MIX-53 (19/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_19

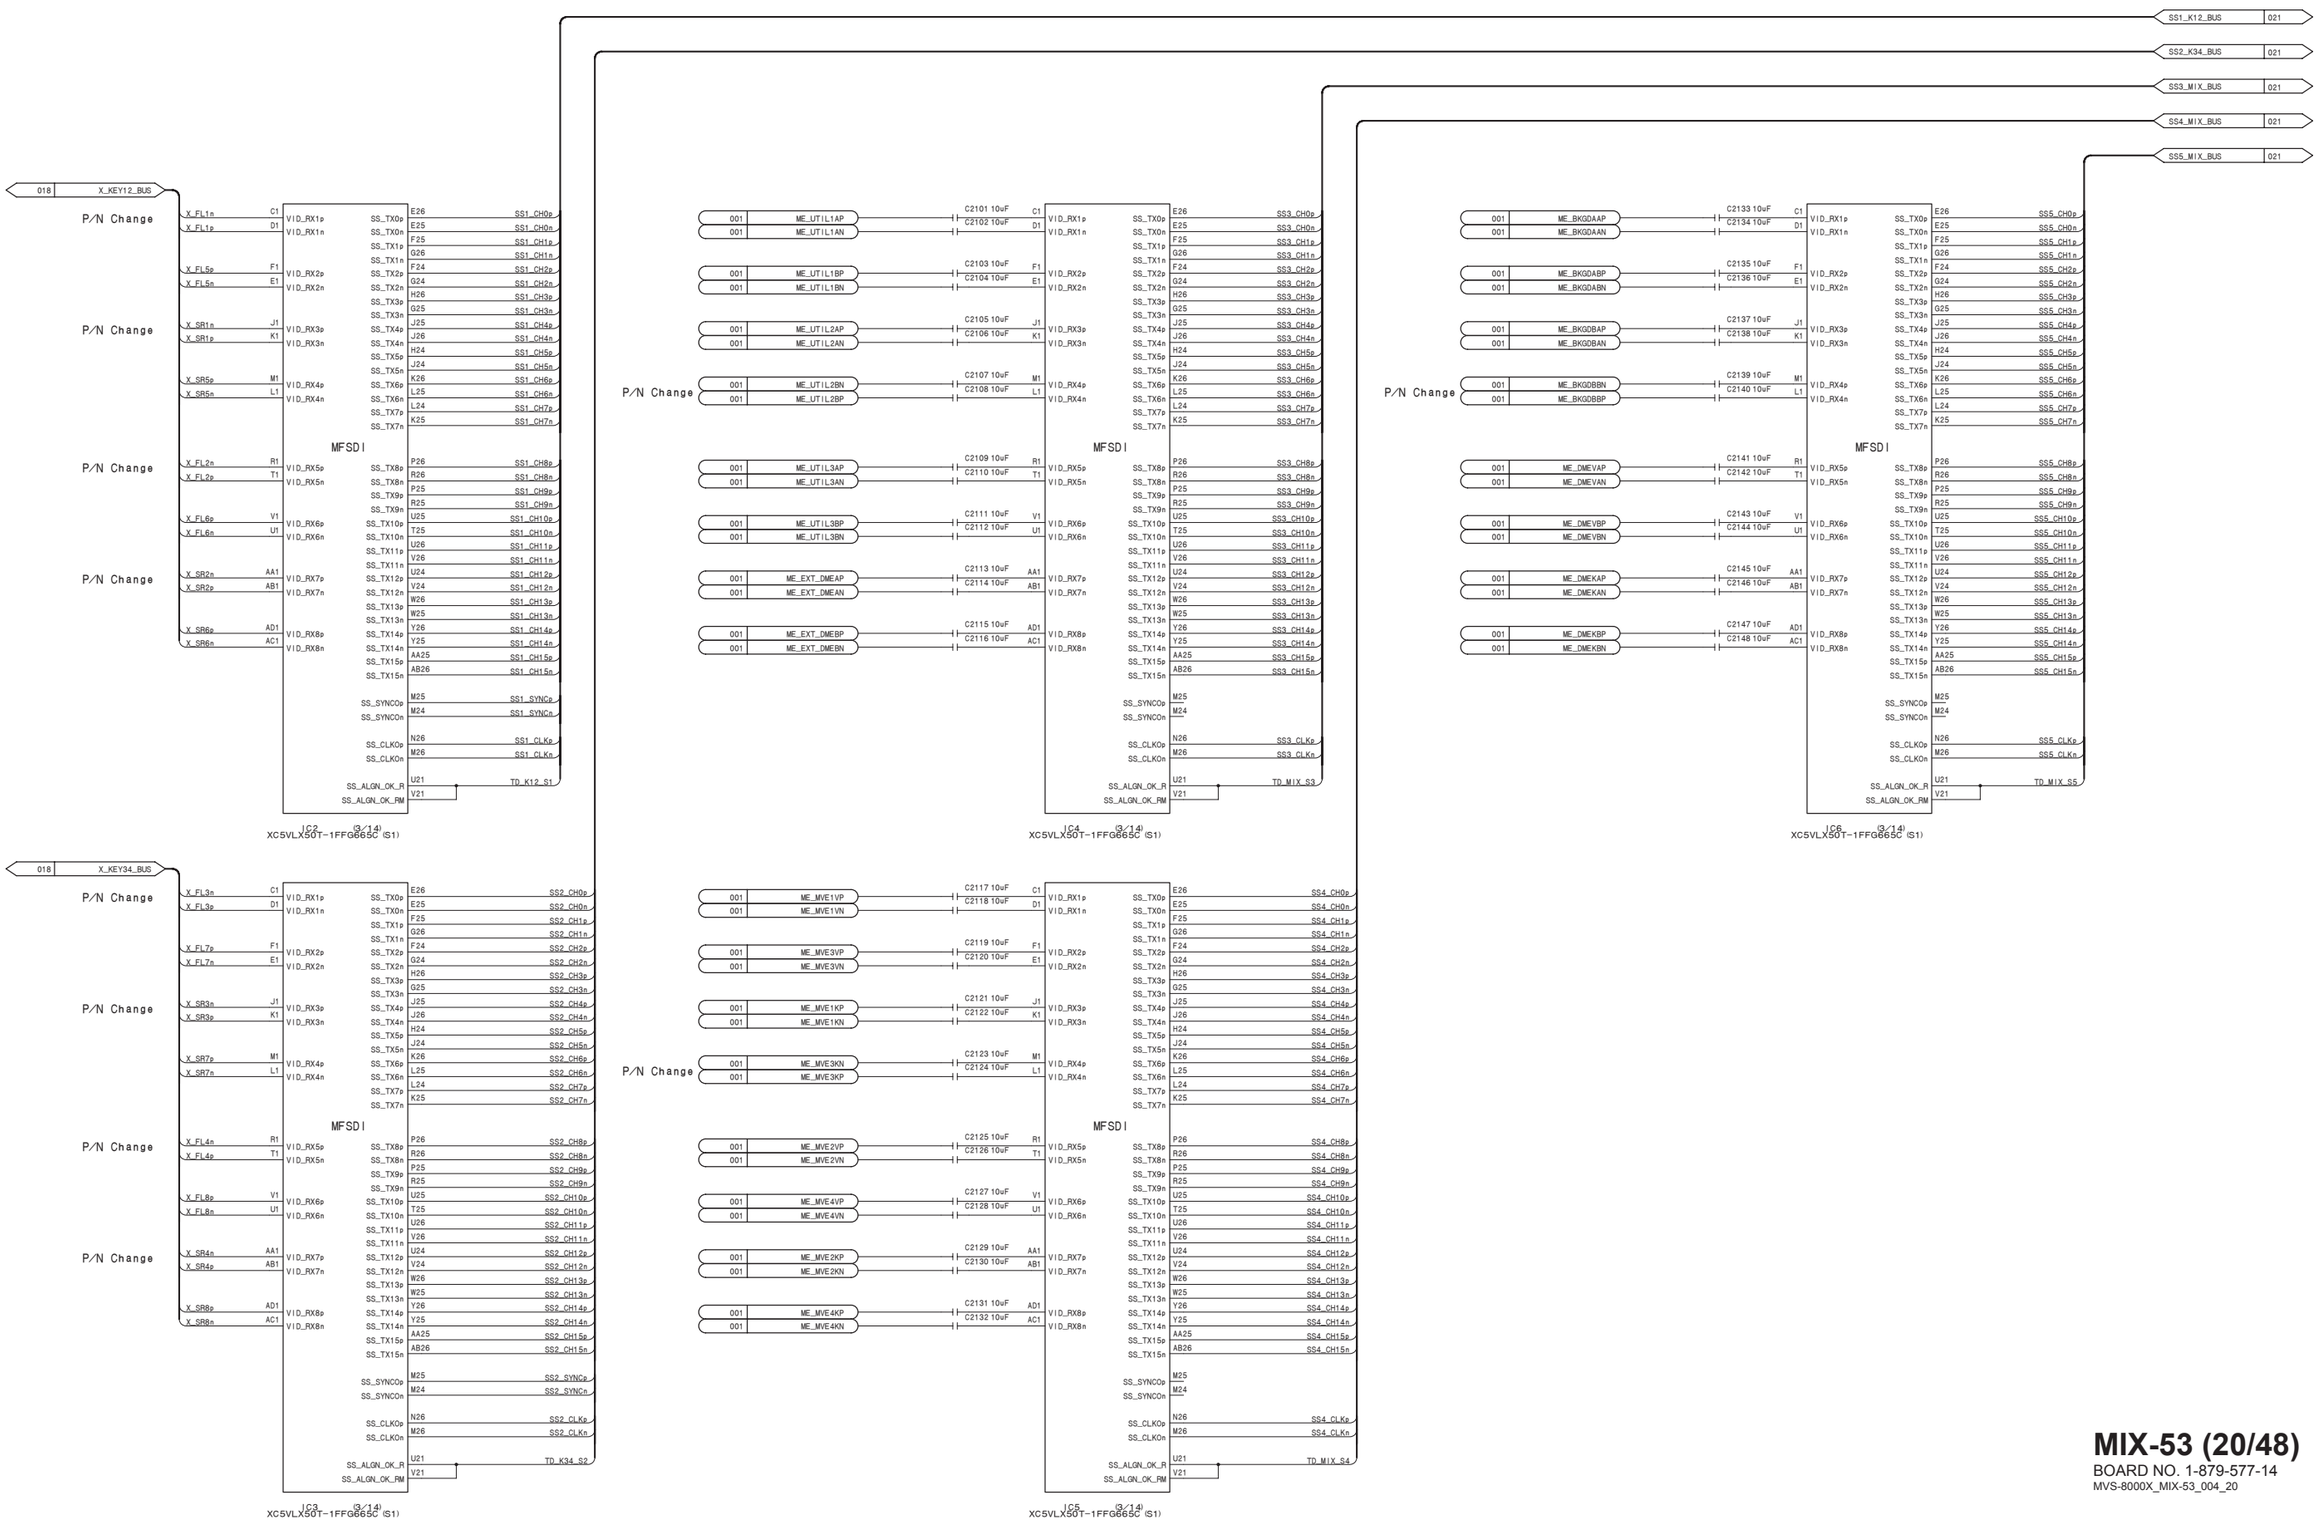

MIX-53 (20/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_20

MIX-53 (21/48)
SUFFIX: -14

020 SS4_MIX_BUS
020 SS3_MIX_BUS
020 SS5_MIX_BUS
020 SS1_K12_BUS
020 SS2_K34_BUS

IC7 (5/16)
EP3SL200F1152C4N

SS1_CH0p V4
SS1_CH0n V3
SS1_CH1p AA4
SS1_CH1n Y3
SS1_CH2p Y4
SS1_CH2n W3
SS1_CH3p Y2
SS1_CH3n Y1
SS1_CH4p AB4
SS1_CH4n AA3
SS1_CH5p AA1
SS1_CH5n AB1
SS1_CH6p AB2
SS1_CH6n AC1
SS1_CH7p AC2
SS1_CH7n AD1

KEYER

SS1_CH8p AE2
SS1_CH8n AE1
SS1_CH9p AF2
SS1_CH9n AF1
SS1_CH10p AJ4
SS1_CH10n AJ3
SS1_CH11p AF4
SS1_CH11n AF3
SS1_CH12p AG4
SS1_CH12n AG3
SS1_CH13p AJ2
SS1_CH13n AK1
SS1_CH14p AH2
SS1_CH14n AJ1
SS1_CH15p AG1
SS1_CH15n AH1

SS1_SYNCp AE4
SS1_SYNCn AE3

SS1_CLKp W2
SS1_CLKn R2201 100 W1

TD_K12_S1 R3

SS_FL1VCI
SS_FL1VCI (n)
SS_FL1VYI
SS_FL1VYI (n)
SS_SRC1VCI
SS_SRC1VCI (n)
SS_SRC1VYI
SS_SRC1VYI (n)
SS_FL2VCI
SS_FL2VCI (n)
SS_FL2VYI
SS_FL2VYI (n)
SS_SRC2VCI
SS_SRC2VCI (n)
SS_SRC2VYI
SS_SRC2VYI (n)
SS_FL3VCI
SS_FL3VCI (n)
SS_FL3VYI
SS_FL3VYI (n)
SS_SRC3VCI
SS_SRC3VCI (n)
SS_SRC3VYI
SS_SRC3VYI (n)
SS_FL4VCI
SS_FL4VCI (n)
SS_FL4VYI
SS_FL4VYI (n)
SS_SRC4VCI
SS_SRC4VCI (n)
SS_SRC4VYI
SS_SRC4VYI (n)
SS_SYNCI_1
SS_SYNCI_1 (n)
SS_CLKI_1
SS_CLKI_1 (n)
OP_SDI_LOCK

KEY12

IC8 (5/16)
EP3SL200F1152C4N

SS2_CH0p V4
SS2_CH0n V3
SS2_CH1p AA4
SS2_CH1n Y3
SS2_CH2p Y4
SS2_CH2n W3
SS2_CH3p Y2
SS2_CH3n Y1
SS2_CH4p AB4
SS2_CH4n AA3
SS2_CH5p AA1
SS2_CH5n AB1
SS2_CH6p AB2
SS2_CH6n AC1
SS2_CH7p AC2
SS2_CH7n AD1

KEYER

SS2_CH8p AE2
SS2_CH8n AE1
SS2_CH9p AF2
SS2_CH9n AF1
SS2_CH10p AJ4
SS2_CH10n AJ3
SS2_CH11p AF4
SS2_CH11n AF3
SS2_CH12p AG4
SS2_CH12n AG3
SS2_CH13p AJ2
SS2_CH13n AK1
SS2_CH14p AH2
SS2_CH14n AJ1
SS2_CH15p AG1
SS2_CH15n AH1

SS2_SYNCp AE4
SS2_SYNCn AE3

SS2_CLKp W2
SS2_CLKn R2202 100 W1

TD_K34_S2 R3

SS_FL1VCI
SS_FL1VCI (n)
SS_FL1VYI
SS_FL1VYI (n)
SS_SRC1VCI
SS_SRC1VCI (n)
SS_SRC1VYI
SS_SRC1VYI (n)
SS_FL2VCI
SS_FL2VCI (n)
SS_FL2VYI
SS_FL2VYI (n)
SS_SRC2VCI
SS_SRC2VCI (n)
SS_SRC2VYI
SS_SRC2VYI (n)
SS_FL3VCI
SS_FL3VCI (n)
SS_FL3VYI
SS_FL3VYI (n)
SS_SRC3VCI
SS_SRC3VCI (n)
SS_SRC3VYI
SS_SRC3VYI (n)
SS_FL4VCI
SS_FL4VCI (n)
SS_FL4VYI
SS_FL4VYI (n)
SS_SRC4VCI
SS_SRC4VCI (n)
SS_SRC4VYI
SS_SRC4VYI (n)
SS_SYNCI_1
SS_SYNCI_1 (n)
SS_CLKI_1
SS_CLKI_1 (n)
OP_SDI_LOCK

KEY34

IC9 (6/25)
EP3SL200F1517C4N

SS4_CH0p AC36
SS4_CH0n AC37
SS4_CH1p AB36
SS4_CH1n AB37
SS4_CH2p AF39
SS4_CH2n AE39
SS4_CH3p AC39
SS4_CH3n AD39
SS4_CH4p AA36
SS4_CH4n AA37
SS4_CH5p AB38
SS4_CH5n AB39
SS4_CH6p Y36
SS4_CH6n Y37
SS4_CH7p W36
SS4_CH7n W37

MIXER

SS4_CH8p U36
SS4_CH8n U37
SS4_CH9p T35
SS4_CH9n T36
SS4_CH10p T38
SS4_CH10n T39
SS4_CH11p R39
SS4_CH11n P39
SS4_CH12p R37
SS4_CH12n R38
SS4_CH13p P36
SS4_CH13n P37
SS4_CH14p P33
SS4_CH14n P34
SS4_CH15p N34
SS4_CH15n N35

SS4_CLKp AA38
SS4_CLKn R2204 100 AA39

TD_MIX_S4 AN36

IP_SS_SDI4[0]
IP_SS_SDI4[0] (n)
IP_SS_SDI4[1]
IP_SS_SDI4[1] (n)
IP_SS_SDI4[2]
IP_SS_SDI4[2] (n)
IP_SS_SDI4[3]
IP_SS_SDI4[3] (n)
IP_SS_SDI4[4]
IP_SS_SDI4[4] (n)
IP_SS_SDI4[5]
IP_SS_SDI4[5] (n)
IP_SS_SDI4[6]
IP_SS_SDI4[6] (n)
IP_SS_SDI4[7]
IP_SS_SDI4[7] (n)
IP_SS_SDI4[8]
IP_SS_SDI4[8] (n)
IP_SS_SDI4[9]
IP_SS_SDI4[9] (n)
IP_SS_SDI4[10]
IP_SS_SDI4[10] (n)
IP_SS_SDI4[11]
IP_SS_SDI4[11] (n)
IP_SS_SDI4[12]
IP_SS_SDI4[12] (n)
IP_SS_SDI4[13]
IP_SS_SDI4[13] (n)
IP_SS_SDI4[14]
IP_SS_SDI4[14] (n)
IP_SS_SDI4[15]
IP_SS_SDI4[15] (n)
IP_SS_SDI4_CLK
IP_SS_SDI4_CLK (n)
OP_SDI4_LOCK

MIXER

IC9 (7/25)
EP3SL200F1517C4N

SS5_CH0p AM36
SS5_CH0n AM37
SS5_CH1p AP38
SS5_CH1n AN38
SS5_CH2p AJ36
SS5_CH2n AJ37
SS5_CH3p AN39
SS5_CH3n AM39
SS5_CH4p AL37
SS5_CH4n AK38
SS5_CH5p AL38
SS5_CH5n AL39
SS5_CH6p AK39
SS5_CH6n AJ39
SS5_CH7p AF34
SS5_CH7n AG35

MIXER

SS5_CH8p AG38
SS5_CH8n AG39
SS5_CH9p AH38
SS5_CH9n AH39
SS5_CH10p AG36
SS5_CH10n AH37
SS5_CH11p AF36
SS5_CH11n AF37
SS5_CH12p AD38
SS5_CH12n AE38
SS5_CH13p AE36
SS5_CH13n AE37
SS5_CH14p AD35
SS5_CH14n AD36
SS5_CH15p AE34
SS5_CH15n AE35

SS5_CLKp AU38
SS5_CLKn R2205 100 AU39

TD_MIX_S5 AR39

IP_SS_SDI5[0]
IP_SS_SDI5[0] (n)
IP_SS_SDI5[1]
IP_SS_SDI5[1] (n)
IP_SS_SDI5[2]
IP_SS_SDI5[2] (n)
IP_SS_SDI5[3]
IP_SS_SDI5[3] (n)
IP_SS_SDI5[4]
IP_SS_SDI5[4] (n)
IP_SS_SDI5[5]
IP_SS_SDI5[5] (n)
IP_SS_SDI5[6]
IP_SS_SDI5[6] (n)
IP_SS_SDI5[7]
IP_SS_SDI5[7] (n)
IP_SS_SDI5[8]
IP_SS_SDI5[8] (n)
IP_SS_SDI5[9]
IP_SS_SDI5[9] (n)
IP_SS_SDI5[10]
IP_SS_SDI5[10] (n)
IP_SS_SDI5[11]
IP_SS_SDI5[11] (n)
IP_SS_SDI5[12]
IP_SS_SDI5[12] (n)
IP_SS_SDI5[13]
IP_SS_SDI5[13] (n)
IP_SS_SDI5[14]
IP_SS_SDI5[14] (n)
IP_SS_SDI5[15]
IP_SS_SDI5[15] (n)
IP_SS_SDI5_CLK
IP_SS_SDI5_CLK (n)
OP_SDI5_LOCK

MIXER

IC9 (5/25)
EP3SL200F1517C4N

SS3_CH0p N38
SS3_CH0n N39
SS3_CH1p M35
SS3_CH1n M36
SS3_CH2p M38
SS3_CH2n M39
SS3_CH3p N36
SS3_CH3n N37
SS3_CH4p L39
SS3_CH4n K39
SS3_CH5p K37
SS3_CH5n K38
SS3_CH6p J38
SS3_CH6n J39
SS3_CH7p H36
SS3_CH7n H37

MIXER

SS3_CH8p G36
SS3_CH8n F36
SS3_CH9p G37
SS3_CH9n G38
SS3_CH10p H34
SS3_CH10n G35
SS3_CH11p F38
SS3_CH11n F39
SS3_CH12p H39
SS3_CH12n G39
SS3_CH13p E36
SS3_CH13n E37
SS3_CH14p D37
SS3_CH14n D38
SS3_CH15p E39
SS3_CH15n D39

SS3_CLKp C38
SS3_CLKn R2203 100 C39

TD_MIX_S3 AL35

IP_SS_SDI3[0]
IP_SS_SDI3[0] (n)
IP_SS_SDI3[1]
IP_SS_SDI3[1] (n)
IP_SS_SDI3[2]
IP_SS_SDI3[2] (n)
IP_SS_SDI3[3]
IP_SS_SDI3[3] (n)
IP_SS_SDI3[4]
IP_SS_SDI3[4] (n)
IP_SS_SDI3[5]
IP_SS_SDI3[5] (n)
IP_SS_SDI3[6]
IP_SS_SDI3[6] (n)
IP_SS_SDI3[7]
IP_SS_SDI3[7] (n)
IP_SS_SDI3[8]
IP_SS_SDI3[8] (n)
IP_SS_SDI3[9]
IP_SS_SDI3[9] (n)
IP_SS_SDI3[10]
IP_SS_SDI3[10] (n)
IP_SS_SDI3[11]
IP_SS_SDI3[11] (n)
IP_SS_SDI3[12]
IP_SS_SDI3[12] (n)
IP_SS_SDI3[13]
IP_SS_SDI3[13] (n)
IP_SS_SDI3[14]
IP_SS_SDI3[14] (n)
IP_SS_SDI3[15]
IP_SS_SDI3[15] (n)
IP_SS_SDI3_CLK
IP_SS_SDI3_CLK (n)
OP_SDI3_LOCK

MIXER

MIX-53 (21/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_21

MIX-53 (22/48)
SUFFIX: -14

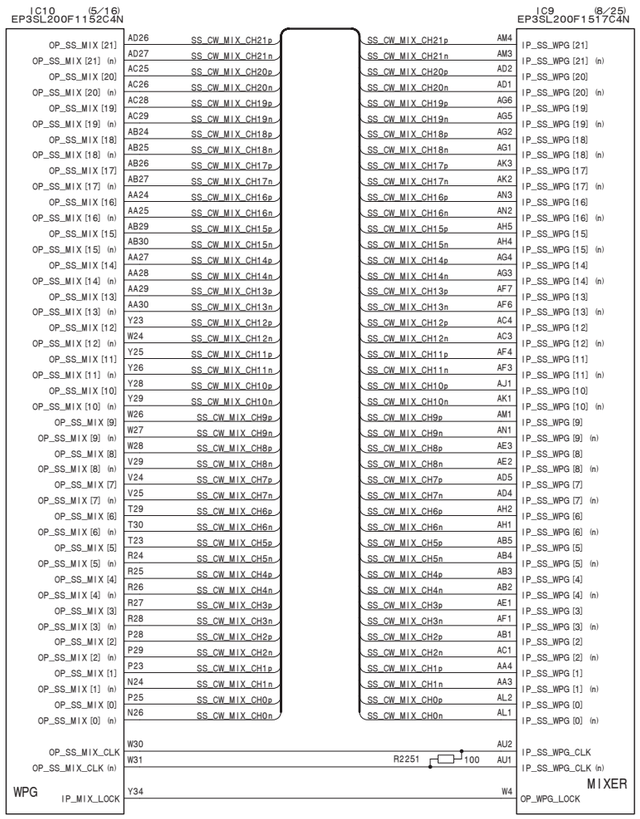

WPG MIXER

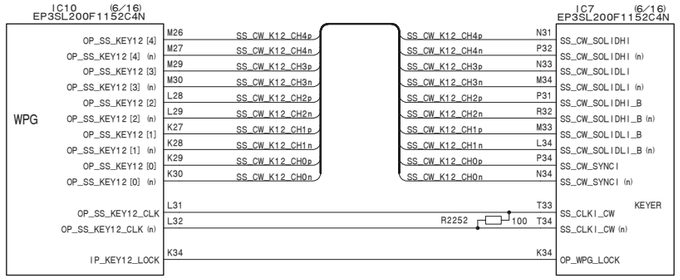

WPG KEY12

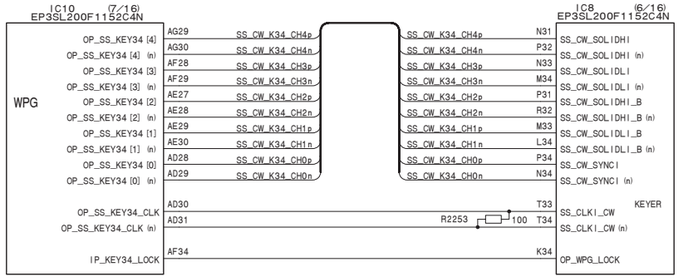

WPG KEY34

MIX-53 (22/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_22

4-208 (a)

MIX-53 (23/48)
SUFFIX: -14

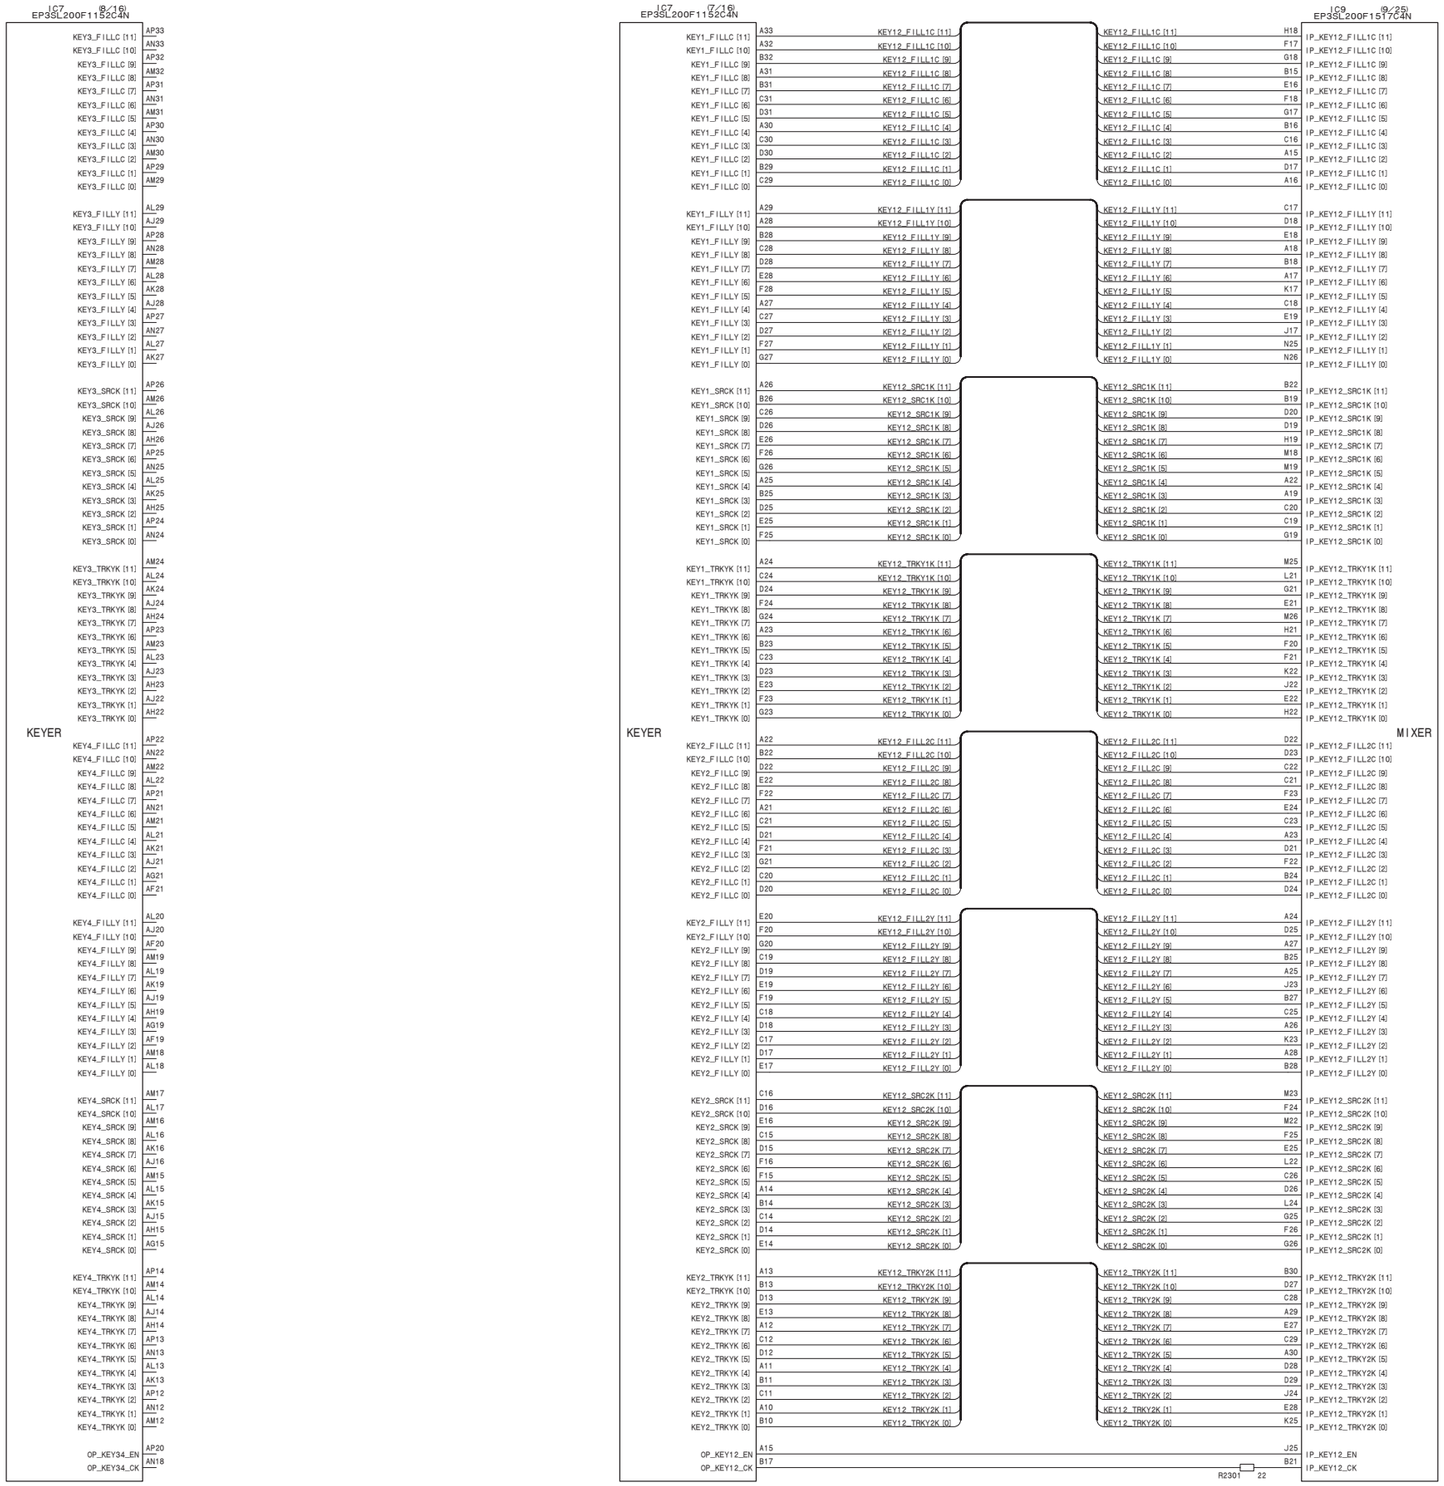

MIX-53 (23/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_23

MIX-53 (24/48)
SUFFIX: -14

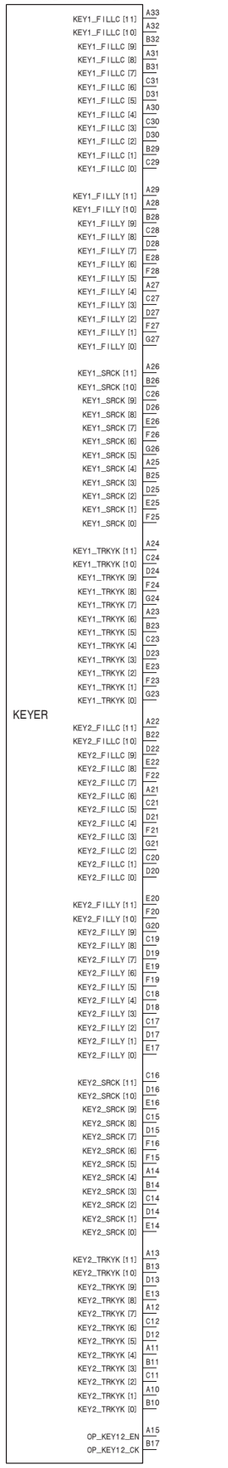

KEY34 (No Use Side)

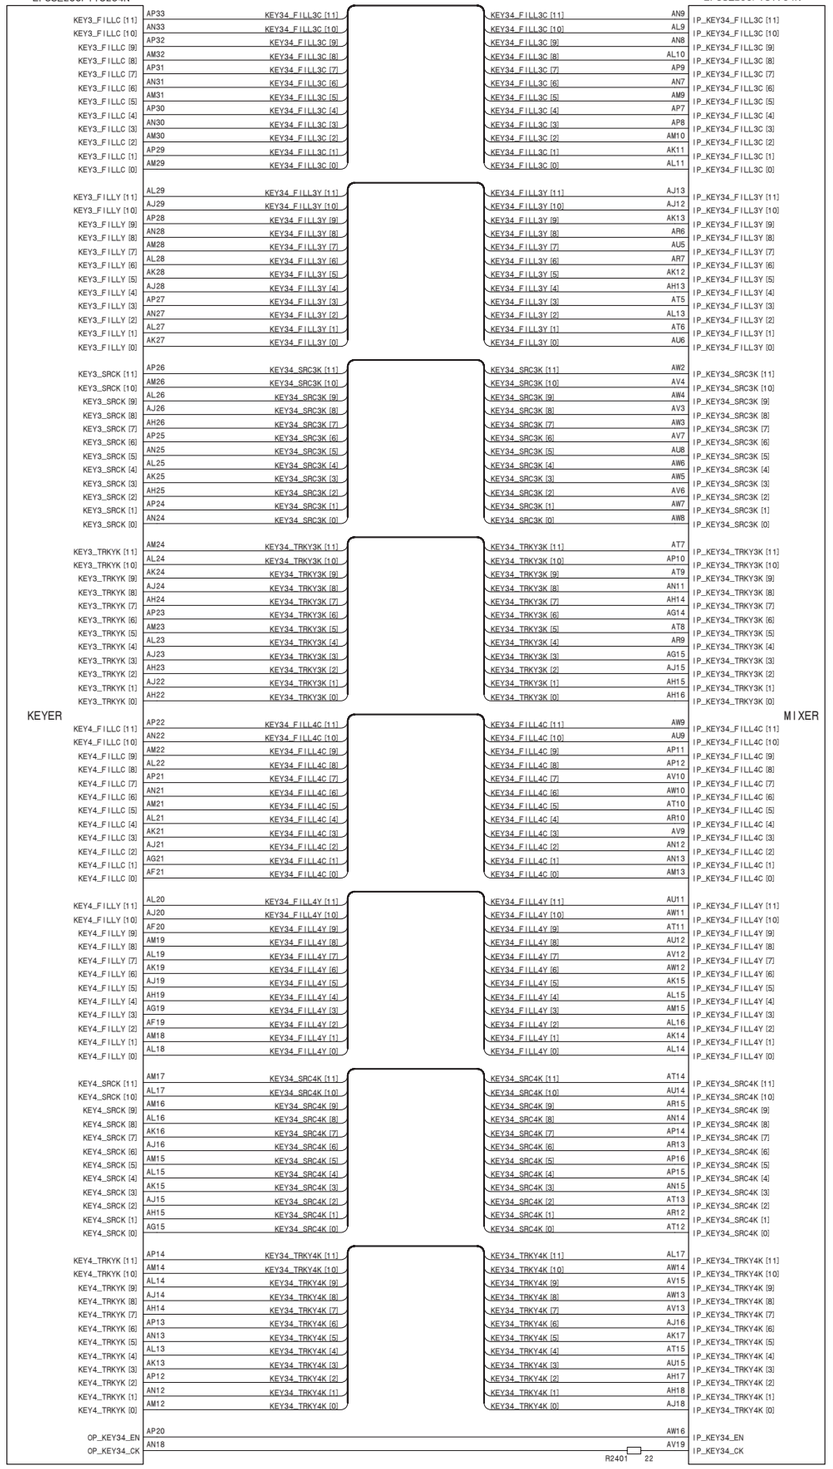

KEY34

MIXER

MIX-53 (24/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_24

MIX-53 (25/48)
SUFFIX: -14

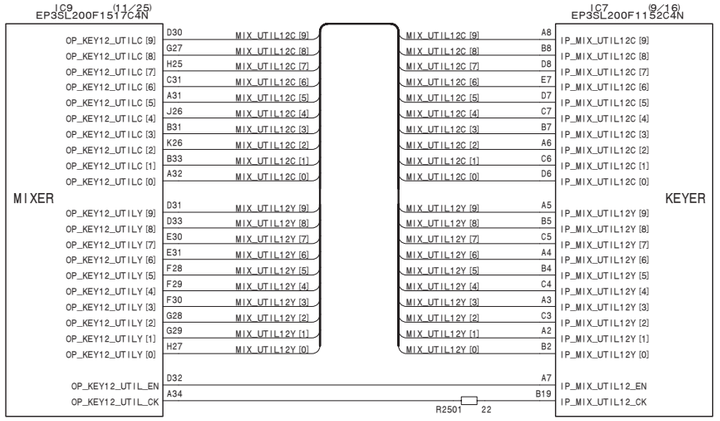

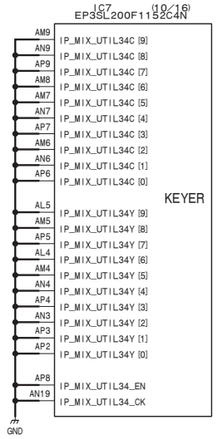



MIX-53 (25/48)

BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_25

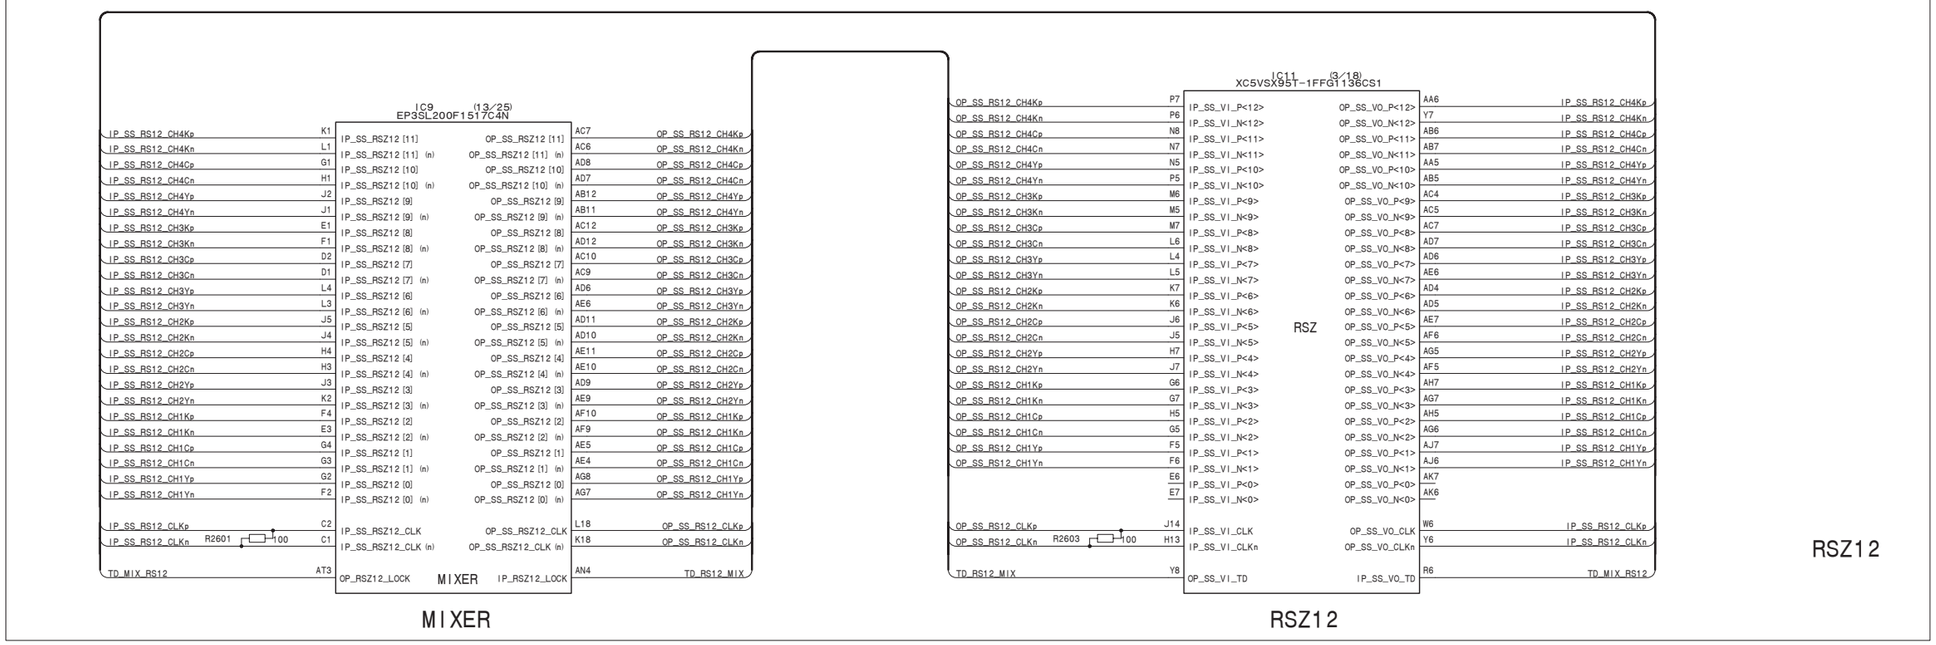

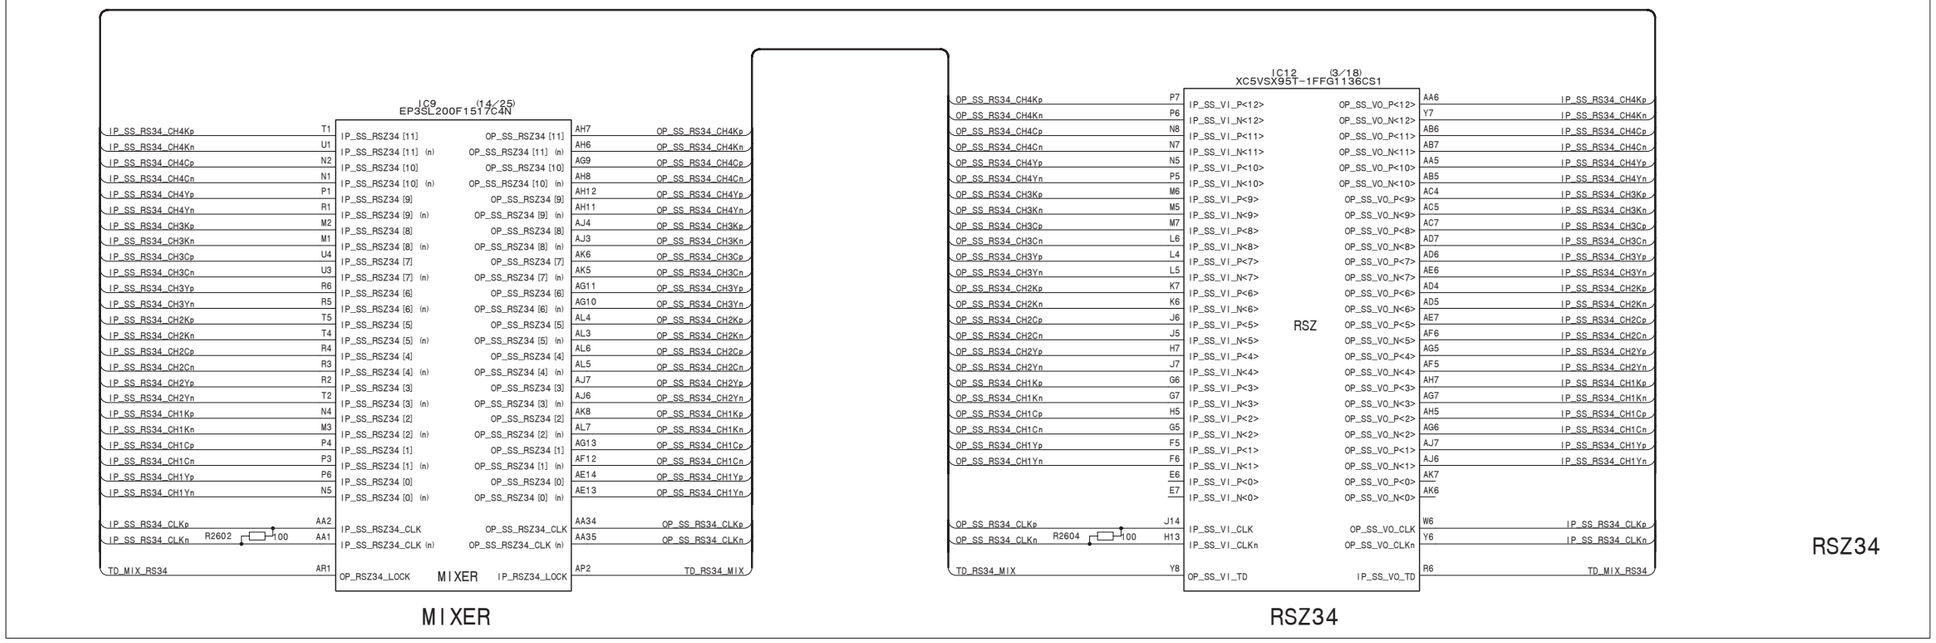

MIX-53 (26/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_26

MIX-53 (27/48)

SUFFIX: -14

MIX-53 (27/48)

SUFFIX: -14

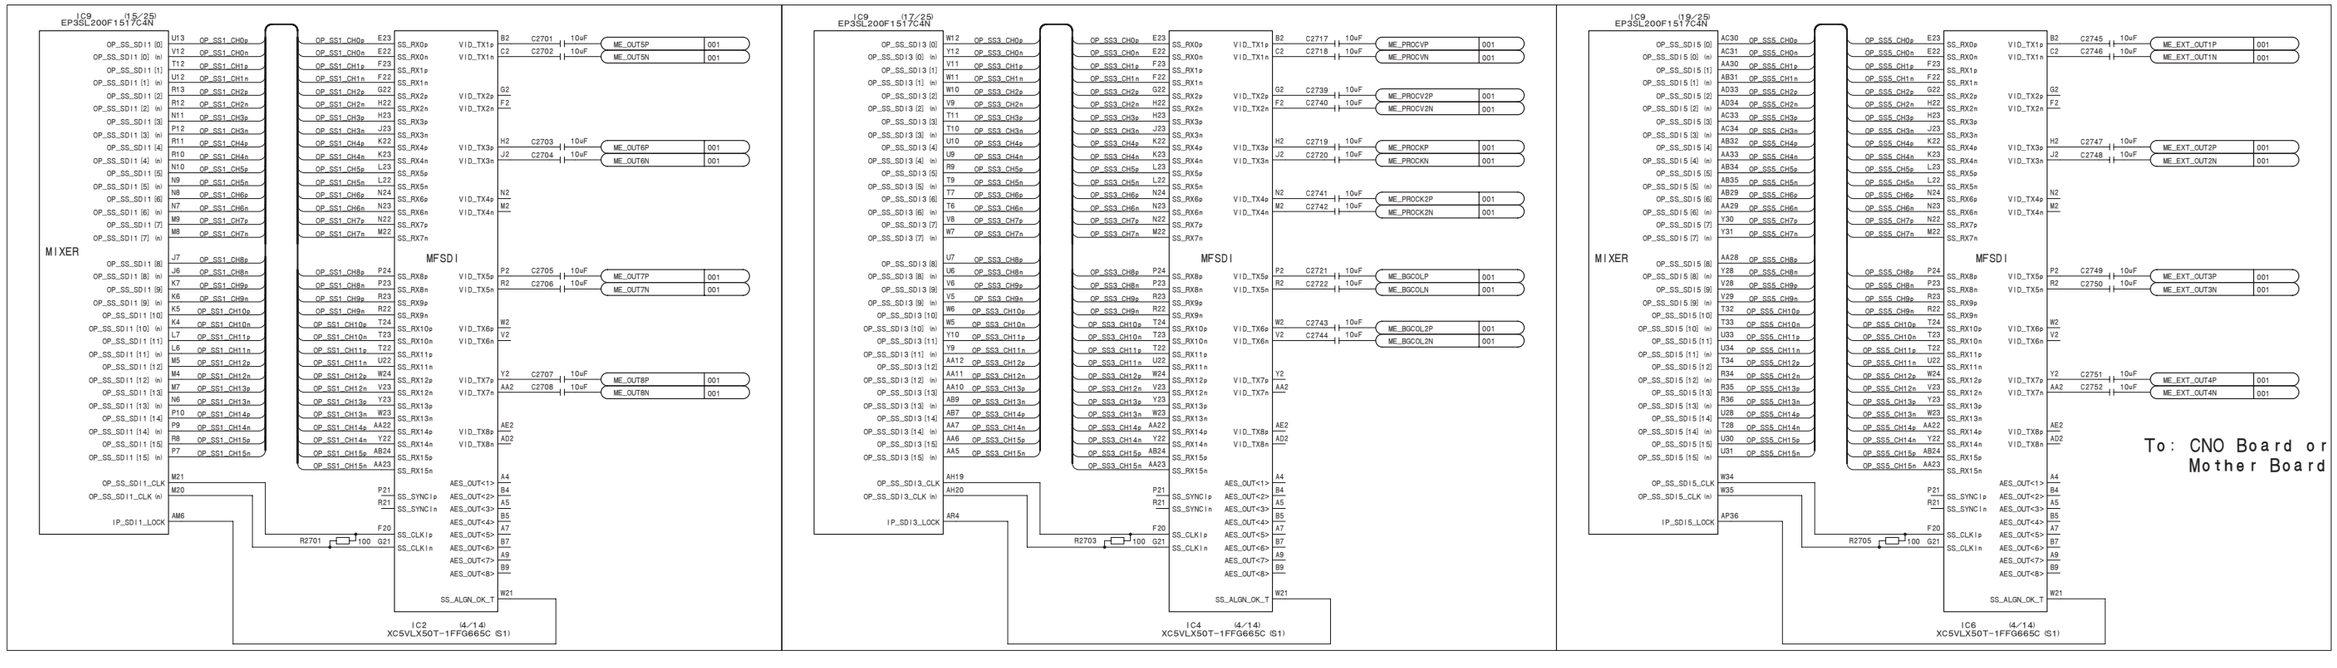

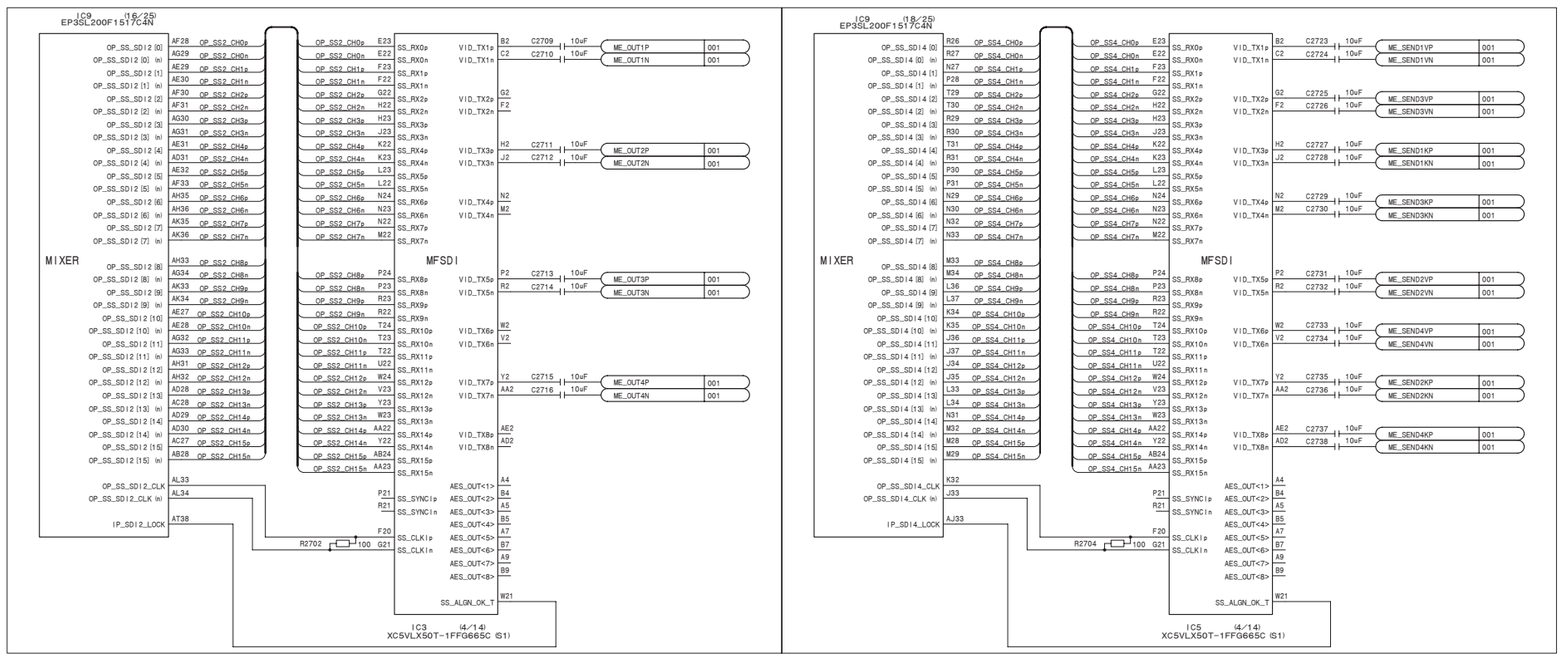

MIX-53 (27/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_27

MIX-53 (28/48)
SUFFIX: -14

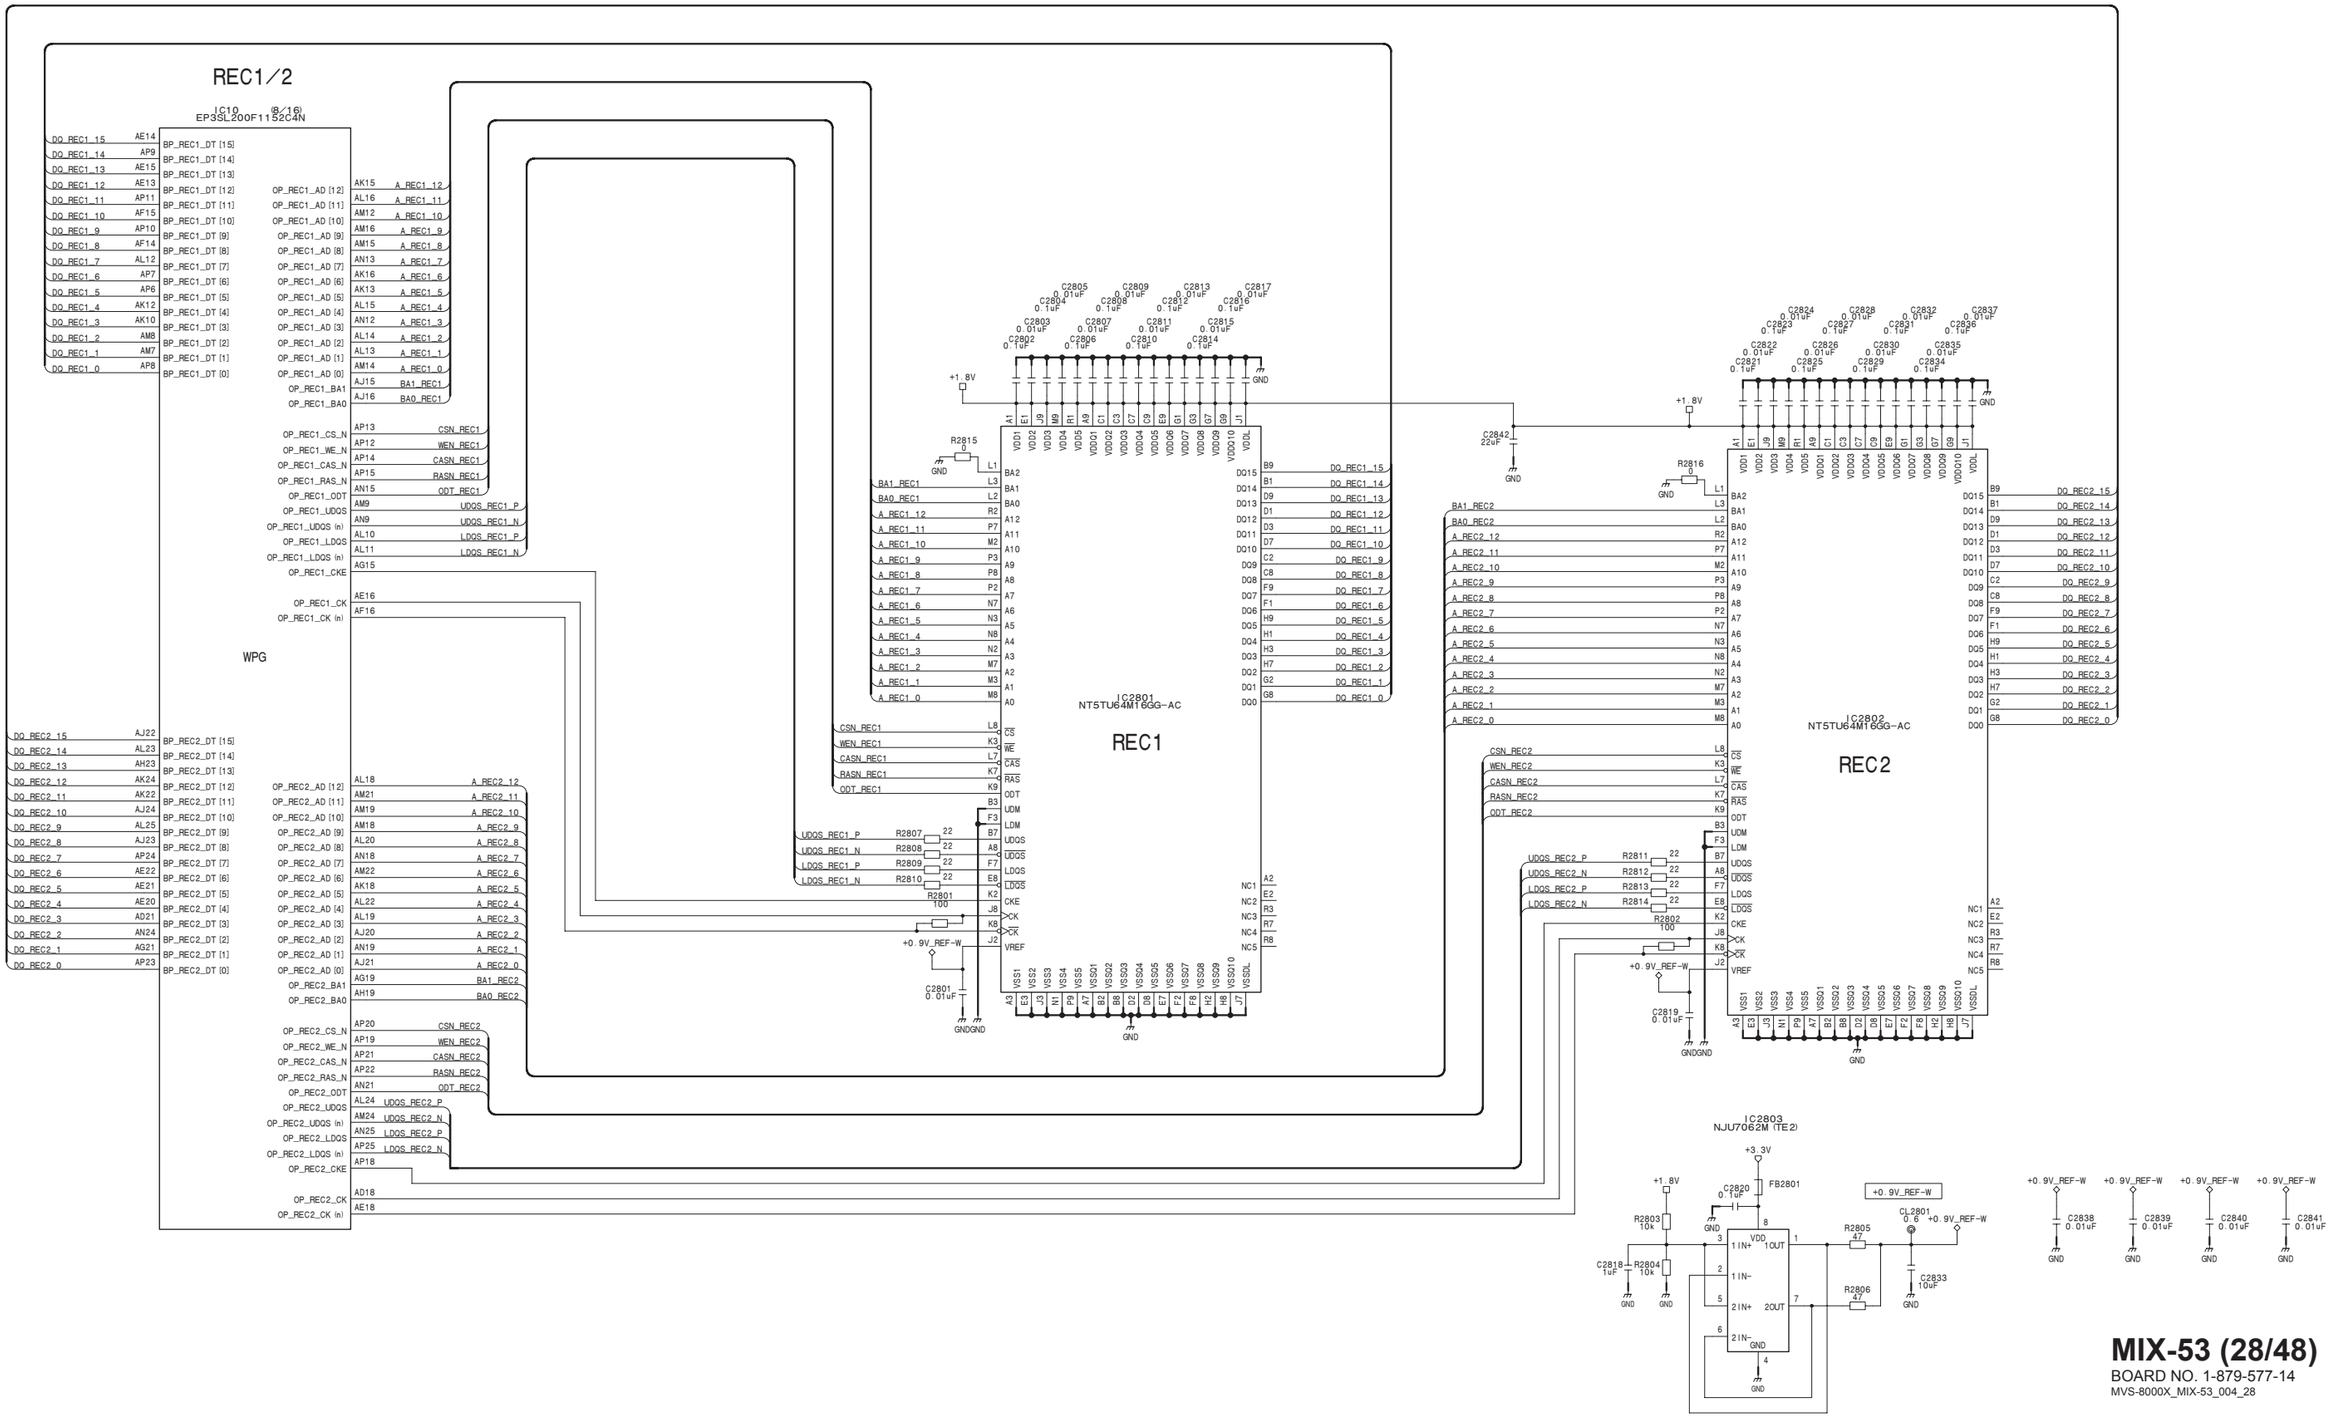

4-214 (a)

MIX-53 (29/48)
SUFFIX: -14

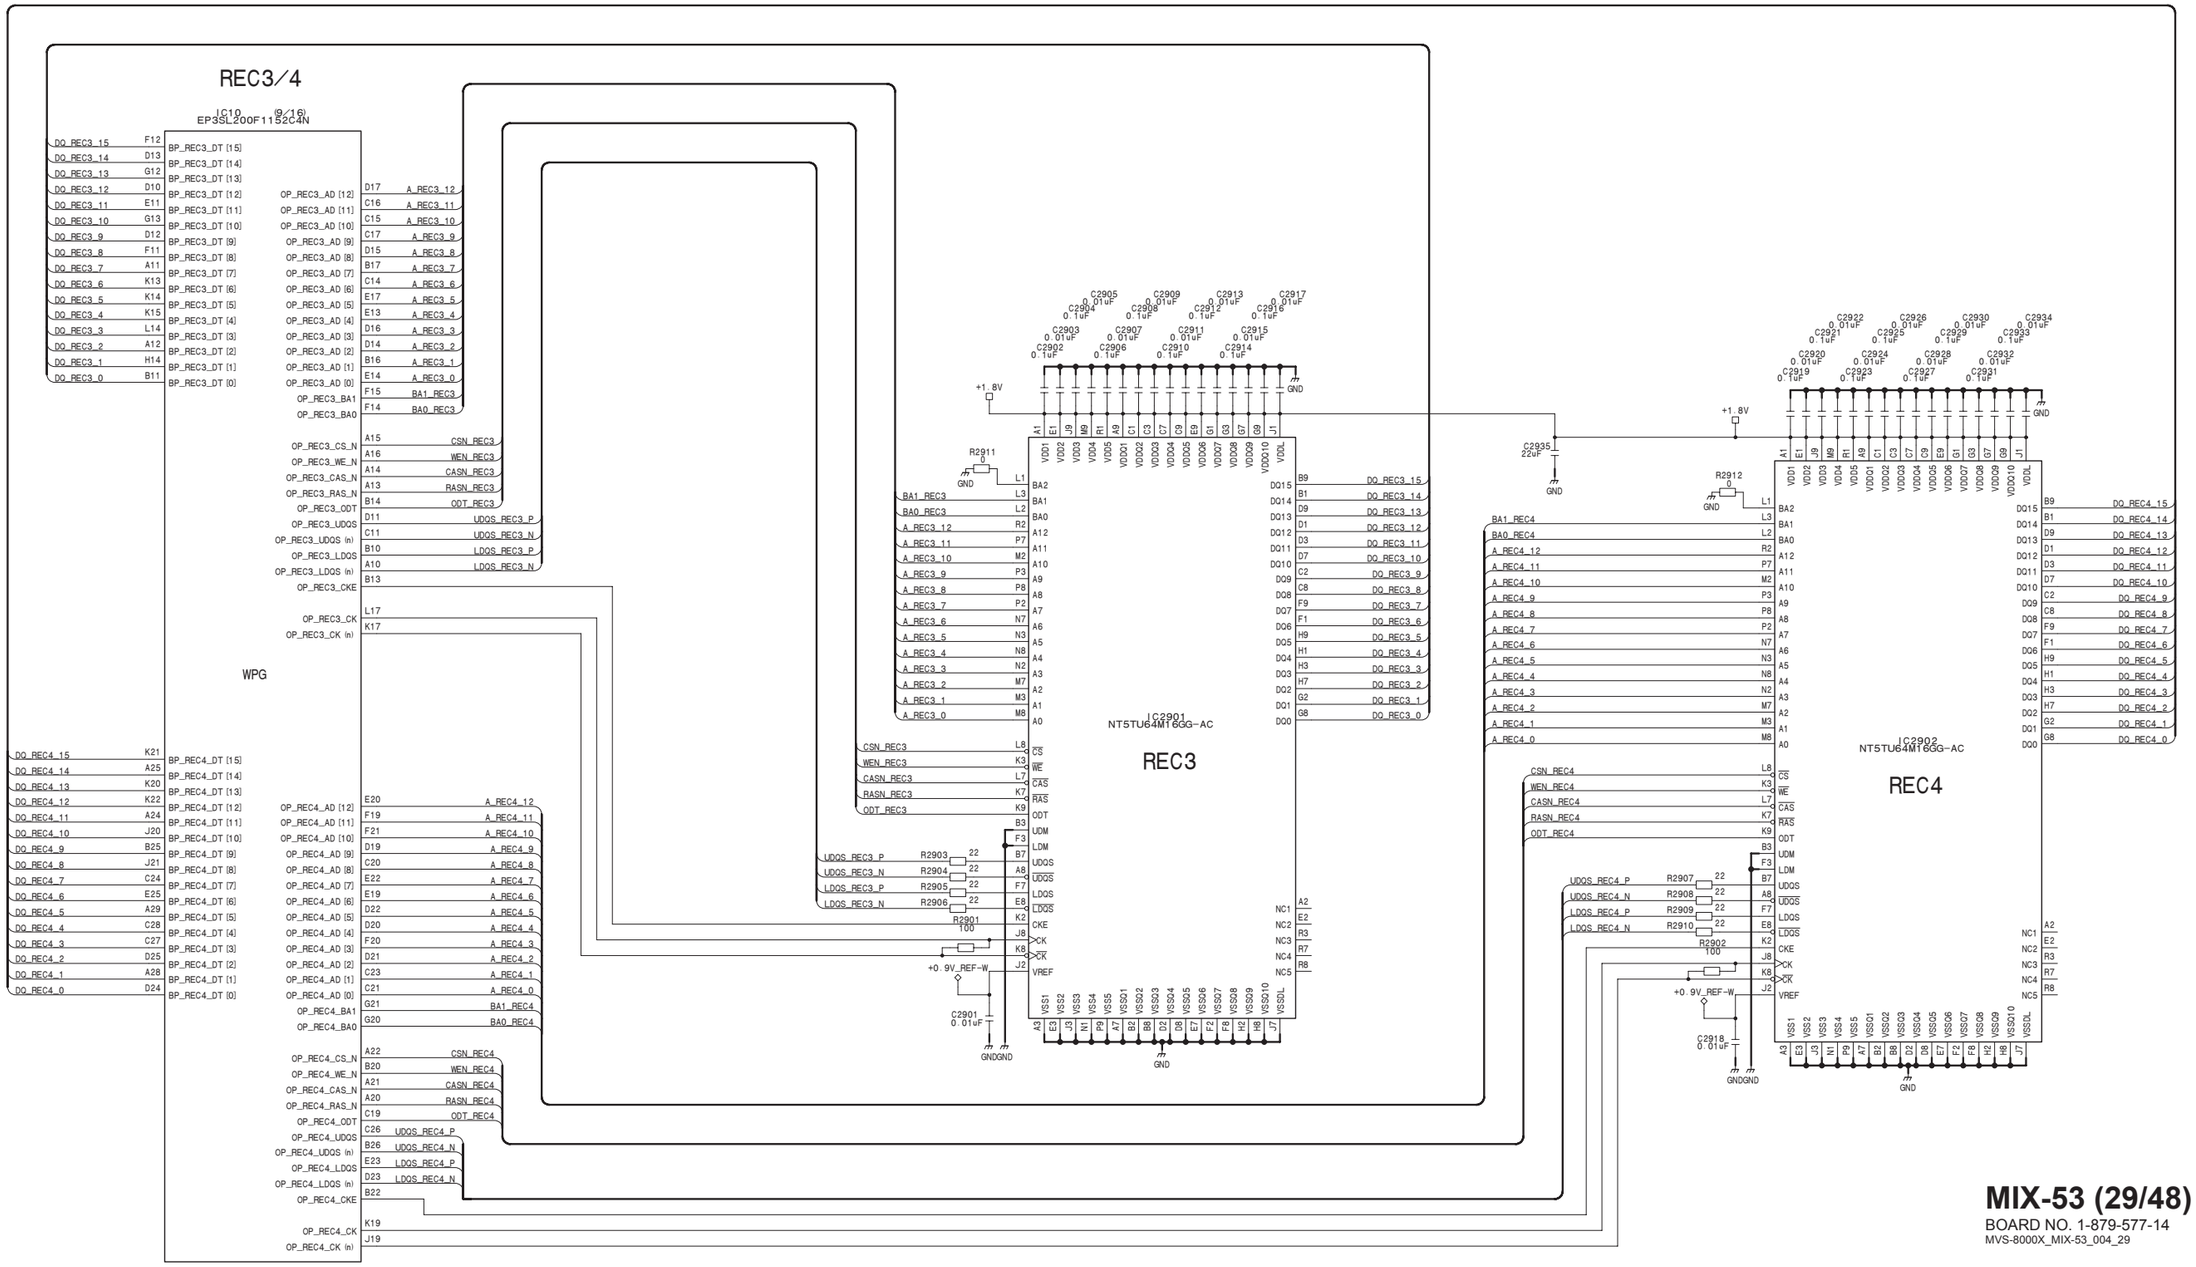

MIX-53 (29/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_29

MIX-53 (30/48)
SUFFIX: -14

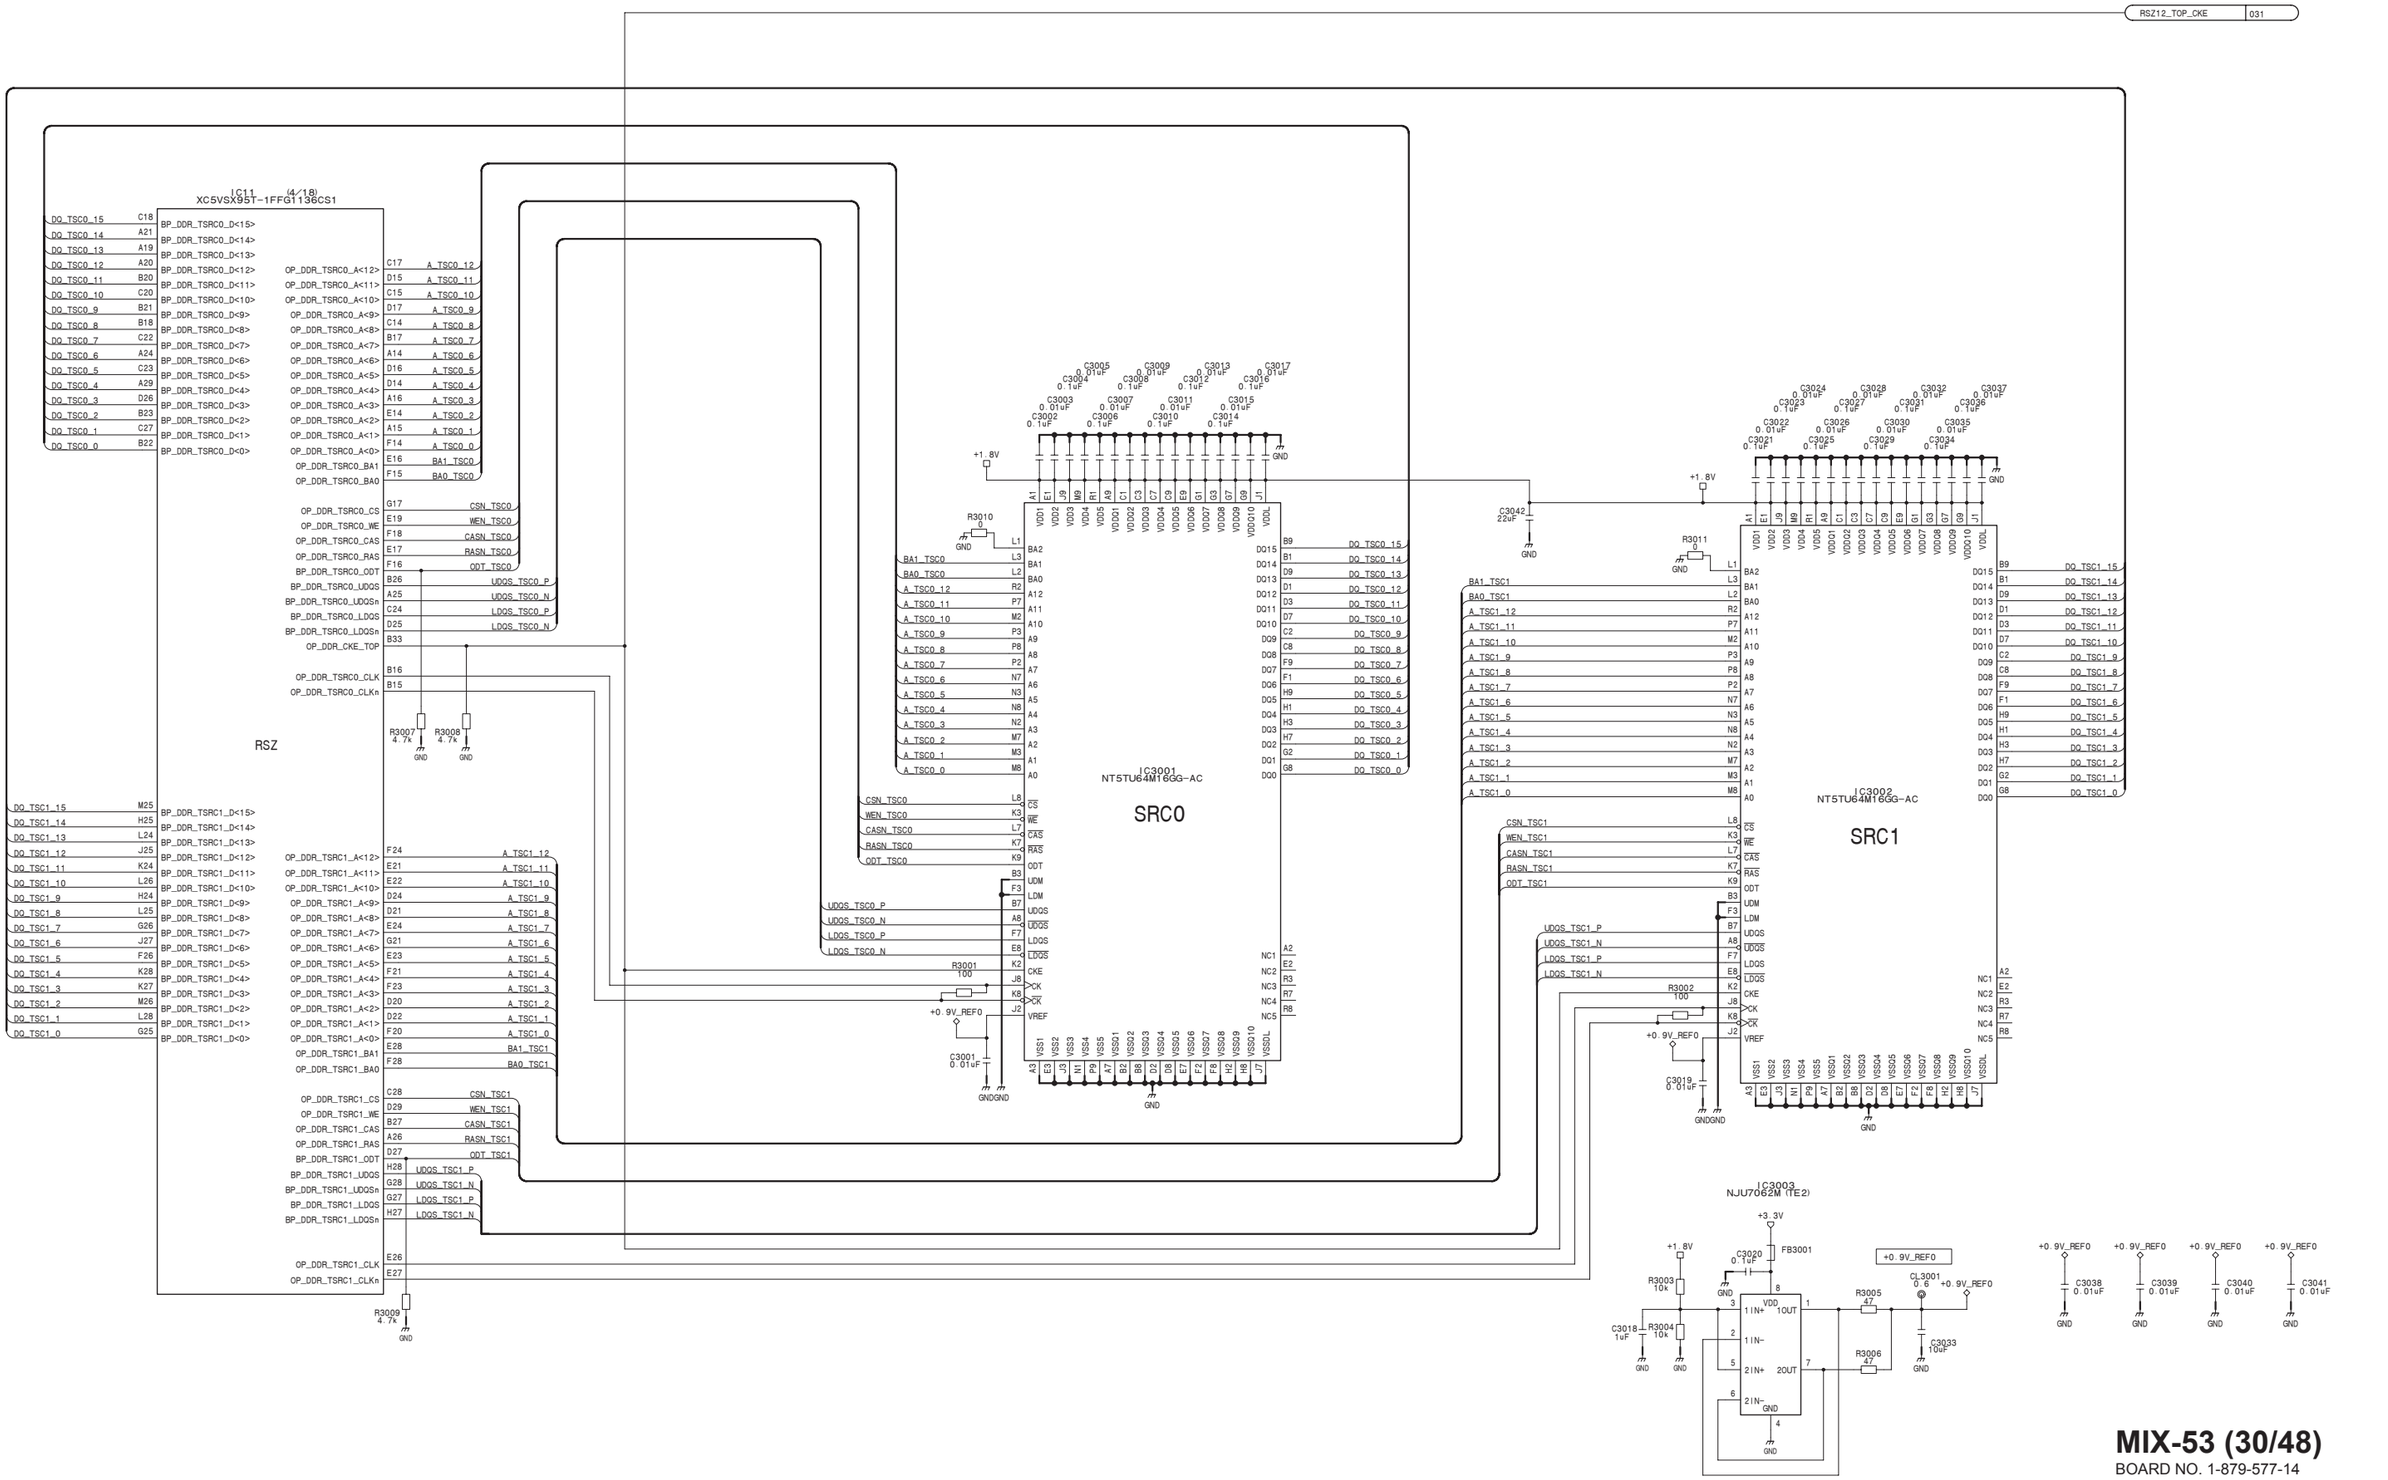

MIX-53 (30/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_30

MIX-53 (31/48)
SUFFIX: -14

030 RSZ12_TOP_CKE

IC11 (5/18)
XC5VSX95T-1FFG1136CS1

RSZ

DQ_TSC2_15 E29
DQ_TSC2_14 G30
DQ_TSC2_13 J29
DQ_TSC2_12 F31
DQ_TSC2_11 F30
DQ_TSC2_10 E31
DQ_TSC2_9 L29
DQ_TSC2_8 F29
DQ_TSC2_7 G31
DQ_TSC2_6 M30
DQ_TSC2_5 J31
DQ_TSC2_4 T31
DQ_TSC2_3 U30
DQ_TSC2_2 J30
DQ_TSC2_1 R31
DQ_TSC2_0 H30

BP_DDR_TSRC2_D<15>
BP_DDR_TSRC2_D<14>
BP_DDR_TSRC2_D<13>
BP_DDR_TSRC2_D<12>
BP_DDR_TSRC2_D<11>
BP_DDR_TSRC2_D<10>
BP_DDR_TSRC2_D<9>
BP_DDR_TSRC2_D<8>
BP_DDR_TSRC2_D<7>
BP_DDR_TSRC2_D<6>
BP_DDR_TSRC2_D<5>
BP_DDR_TSRC2_D<4>
BP_DDR_TSRC2_D<3>
BP_DDR_TSRC2_D<2>
BP_DDR_TSRC2_D<1>
BP_DDR_TSRC2_D<0>

OP_DDR_TSRC2_A<12> T24 A_TSC2_12
OP_DDR_TSRC2_A<11> P26 A_TSC2_11
OP_DDR_TSRC2_A<10> R27 A_TSC2_10
OP_DDR_TSRC2_A<9> U27 A_TSC2_9
OP_DDR_TSRC2_A<8> N25 A_TSC2_8
OP_DDR_TSRC2_A<7> U28 A_TSC2_7
OP_DDR_TSRC2_A<6> N28 A_TSC2_6
OP_DDR_TSRC2_A<5> R26 A_TSC2_5
OP_DDR_TSRC2_A<4> P24 A_TSC2_4
OP_DDR_TSRC2_A<3> R24 A_TSC2_3
OP_DDR_TSRC2_A<2> M28 A_TSC2_2
OP_DDR_TSRC2_A<1> P25 A_TSC2_1
OP_DDR_TSRC2_A<0> N24 A_TSC2_0
OP_DDR_TSRC2_BA1 U26 BA1_TSC2
OP_DDR_TSRC2_BA0 T26 BA0_TSC2

OP_DDR_TSRC2_CS D31 CSN_TSC2
OP_DDR_TSRC2_WE P27 WEN_TSC2
OP_DDR_TSRC2_CAS D30 CASN_TSC2
OP_DDR_TSRC2_RAS T25 RASN_TSC2
BP_DDR_TSRC2_ODT U25 ODT_TSC2
BP_DDR_TSRC2_UDQS K31 UDQS_TSC2_P
BP_DDR_TSRC2_UDQSn L31 UDQS_TSC2_N
BP_DDR_TSRC2_LDQS N29 LDQS_TSC2_P
BP_DDR_TSRC2_LDQSn P29 LDQS_TSC2_N

OP_DDR_TSRC2_CLK T28
OP_DDR_TSRC2_CLKn T29

R3103 4.7k GND

DQ_TSC3_15 C32
DQ_TSC3_14 F33
DQ_TSC3_13 D32
DQ_TSC3_12 E33
DQ_TSC3_11 E32
DQ_TSC3_10 D34
DQ_TSC3_9 E34
DQ_TSC3_8 C34
DQ_TSC3_7 F34
DQ_TSC3_6 N32
DQ_TSC3_5 L33
DQ_TSC3_4 T33
DQ_TSC3_3 P32
DQ_TSC3_2 M32
DQ_TSC3_1 R34
DQ_TSC3_0 G33

BP_DDR_TSRC3_D<15>
BP_DDR_TSRC3_D<14>
BP_DDR_TSRC3_D<13>
BP_DDR_TSRC3_D<12>
BP_DDR_TSRC3_D<11>
BP_DDR_TSRC3_D<10>
BP_DDR_TSRC3_D<9>
BP_DDR_TSRC3_D<8>
BP_DDR_TSRC3_D<7>
BP_DDR_TSRC3_D<6>
BP_DDR_TSRC3_D<5>
BP_DDR_TSRC3_D<4>
BP_DDR_TSRC3_D<3>
BP_DDR_TSRC3_D<2>
BP_DDR_TSRC3_D<1>
BP_DDR_TSRC3_D<0>

OP_DDR_TSRC3_A<12> U33 A_TSC3_12
OP_DDR_TSRC3_A<11> P30 A_TSC3_11
OP_DDR_TSRC3_A<10> R32 A_TSC3_10
OP_DDR_TSRC3_A<9> T34 A_TSC3_9
OP_DDR_TSRC3_A<8> N30 A_TSC3_8
OP_DDR_TSRC3_A<7> U32 A_TSC3_7
OP_DDR_TSRC3_A<6> M31 A_TSC3_6
OP_DDR_TSRC3_A<5> R33 A_TSC3_5
OP_DDR_TSRC3_A<4> K33 A_TSC3_4
OP_DDR_TSRC3_A<3> U31 A_TSC3_3
OP_DDR_TSRC3_A<2> K32 A_TSC3_2
OP_DDR_TSRC3_A<1> P31 A_TSC3_1
OP_DDR_TSRC3_A<0> C30 A_TSC3_0
OP_DDR_TSRC3_BA1 B32 BA1_TSC3
OP_DDR_TSRC3_BA0 B31 BA0_TSC3

OP_DDR_TSRC3_CS B30 CSN_TSC3
OP_DDR_TSRC3_WE C33 WEN_TSC3
OP_DDR_TSRC3_CAS A30 CASN_TSC3
OP_DDR_TSRC3_RAS A31 RASN_TSC3
BP_DDR_TSRC3_ODT A33 ODT_TSC3
BP_DDR_TSRC3_UDQS H34 UDQS_TSC3_P
BP_DDR_TSRC3_UDQSn J34 UDQS_TSC3_N
BP_DDR_TSRC3_LDQS J32 LDQS_TSC3_P
BP_DDR_TSRC3_LDQSn H33 LDQS_TSC3_N

OP_DDR_TSRC3_CLK L34
OP_DDR_TSRC3_CLKn K34

R3104 4.7k GND

C3102 0.1uF
C3103 C3104 C3105 C3106 C3107 C3108 C3109 C3110 C3111 C3112 C3113 C3114 C3115 C3116 C3117 0.01uF
+1.8V
GND

R3105 0 GND

IC3101
NT5TU64M16GG-AC
SRC2

BA1_TSC2 L1
BA0_TSC2 L3
A_TSC2_12 L2
A_TSC2_11 R2
A_TSC2_10 P7
A_TSC2_9 M2
A_TSC2_8 P3
A_TSC2_7 P8
A_TSC2_6 P2
A_TSC2_5 N7
A_TSC2_4 N3
A_TSC2_3 N8
A_TSC2_2 M7
A_TSC2_1 M3
A_TSC2_0 M8

CSN_TSC2 L8
WEN_TSC2 K3
CASN_TSC2 L7
RASN_TSC2 K7
ODT_TSC2 K9

UDQS_TSC2_P B7
UDQS_TSC2_N A8
LDQS_TSC2_P F7
LDQS_TSC2_N E8

R3101 100
+0.9V_REF0
C3101 0.01uF GNDGND

DQ_TSC2_15 B9
DQ_TSC2_14 B1
DQ_TSC2_13 D9
DQ_TSC2_12 D1
DQ_TSC2_11 D3
DQ_TSC2_10 D7
DQ_TSC2_9 C2
DQ_TSC2_8 C8
DQ_TSC2_7 F9
DQ_TSC2_6 F1
DQ_TSC2_5 H9
DQ_TSC2_4 H1
DQ_TSC2_3 H3
DQ_TSC2_2 H7
DQ_TSC2_1 G2
DQ_TSC2_0 G8

NC1 A2
NC2 E2
NC3 R3
NC4 R7
NC5 R8

C3135 22uF GND

C3119 C3120 C3121 C3122 C3123 C3124 C3125 C3126 C3127 C3128 C3129 C3130 C3131 C3132 C3133 C3134 0.01uF
+1.8V
GND

R3106 0 GND

IC3102
NT5TU64M16GG-AC
SRC3

BA1_TSC3 L1
BA0_TSC3 L3
A_TSC3_12 L2
A_TSC3_11 R2
A_TSC3_10 P7
A_TSC3_9 M2
A_TSC3_8 P3
A_TSC3_7 P8
A_TSC3_6 P2
A_TSC3_5 N7
A_TSC3_4 N3
A_TSC3_3 N8
A_TSC3_2 N2
A_TSC3_1 M7
A_TSC3_0 M3 M8

CSN_TSC3 L8
WEN_TSC3 K3
CASN_TSC3 L7
RASN_TSC3 K7
ODT_TSC3 K9

UDQS_TSC3_P B7
UDQS_TSC3_N A8
LDQS_TSC3_P F7
LDQS_TSC3_N E8

R3102 100
+0.9V_REF0
C3118 0.01uF GNDGND

DQ_TSC3_15 B9
DQ_TSC3_14 B1
DQ_TSC3_13 D9
DQ_TSC3_12 D1
DQ_TSC3_11 D3
DQ_TSC3_10 D7
DQ_TSC3_9 C2
DQ_TSC3_8 C8
DQ_TSC3_7 F9
DQ_TSC3_6 F1
DQ_TSC3_5 H9
DQ_TSC3_4 H1
DQ_TSC3_3 H3
DQ_TSC3_2 H7
DQ_TSC3_1 G2
DQ_TSC3_0 G8

NC1 A2
NC2 E2
NC3 R3
NC4 R7
NC5 R8

MIX-53 (31/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_31

MIX-53 (32/48)
SUFFIX: -14

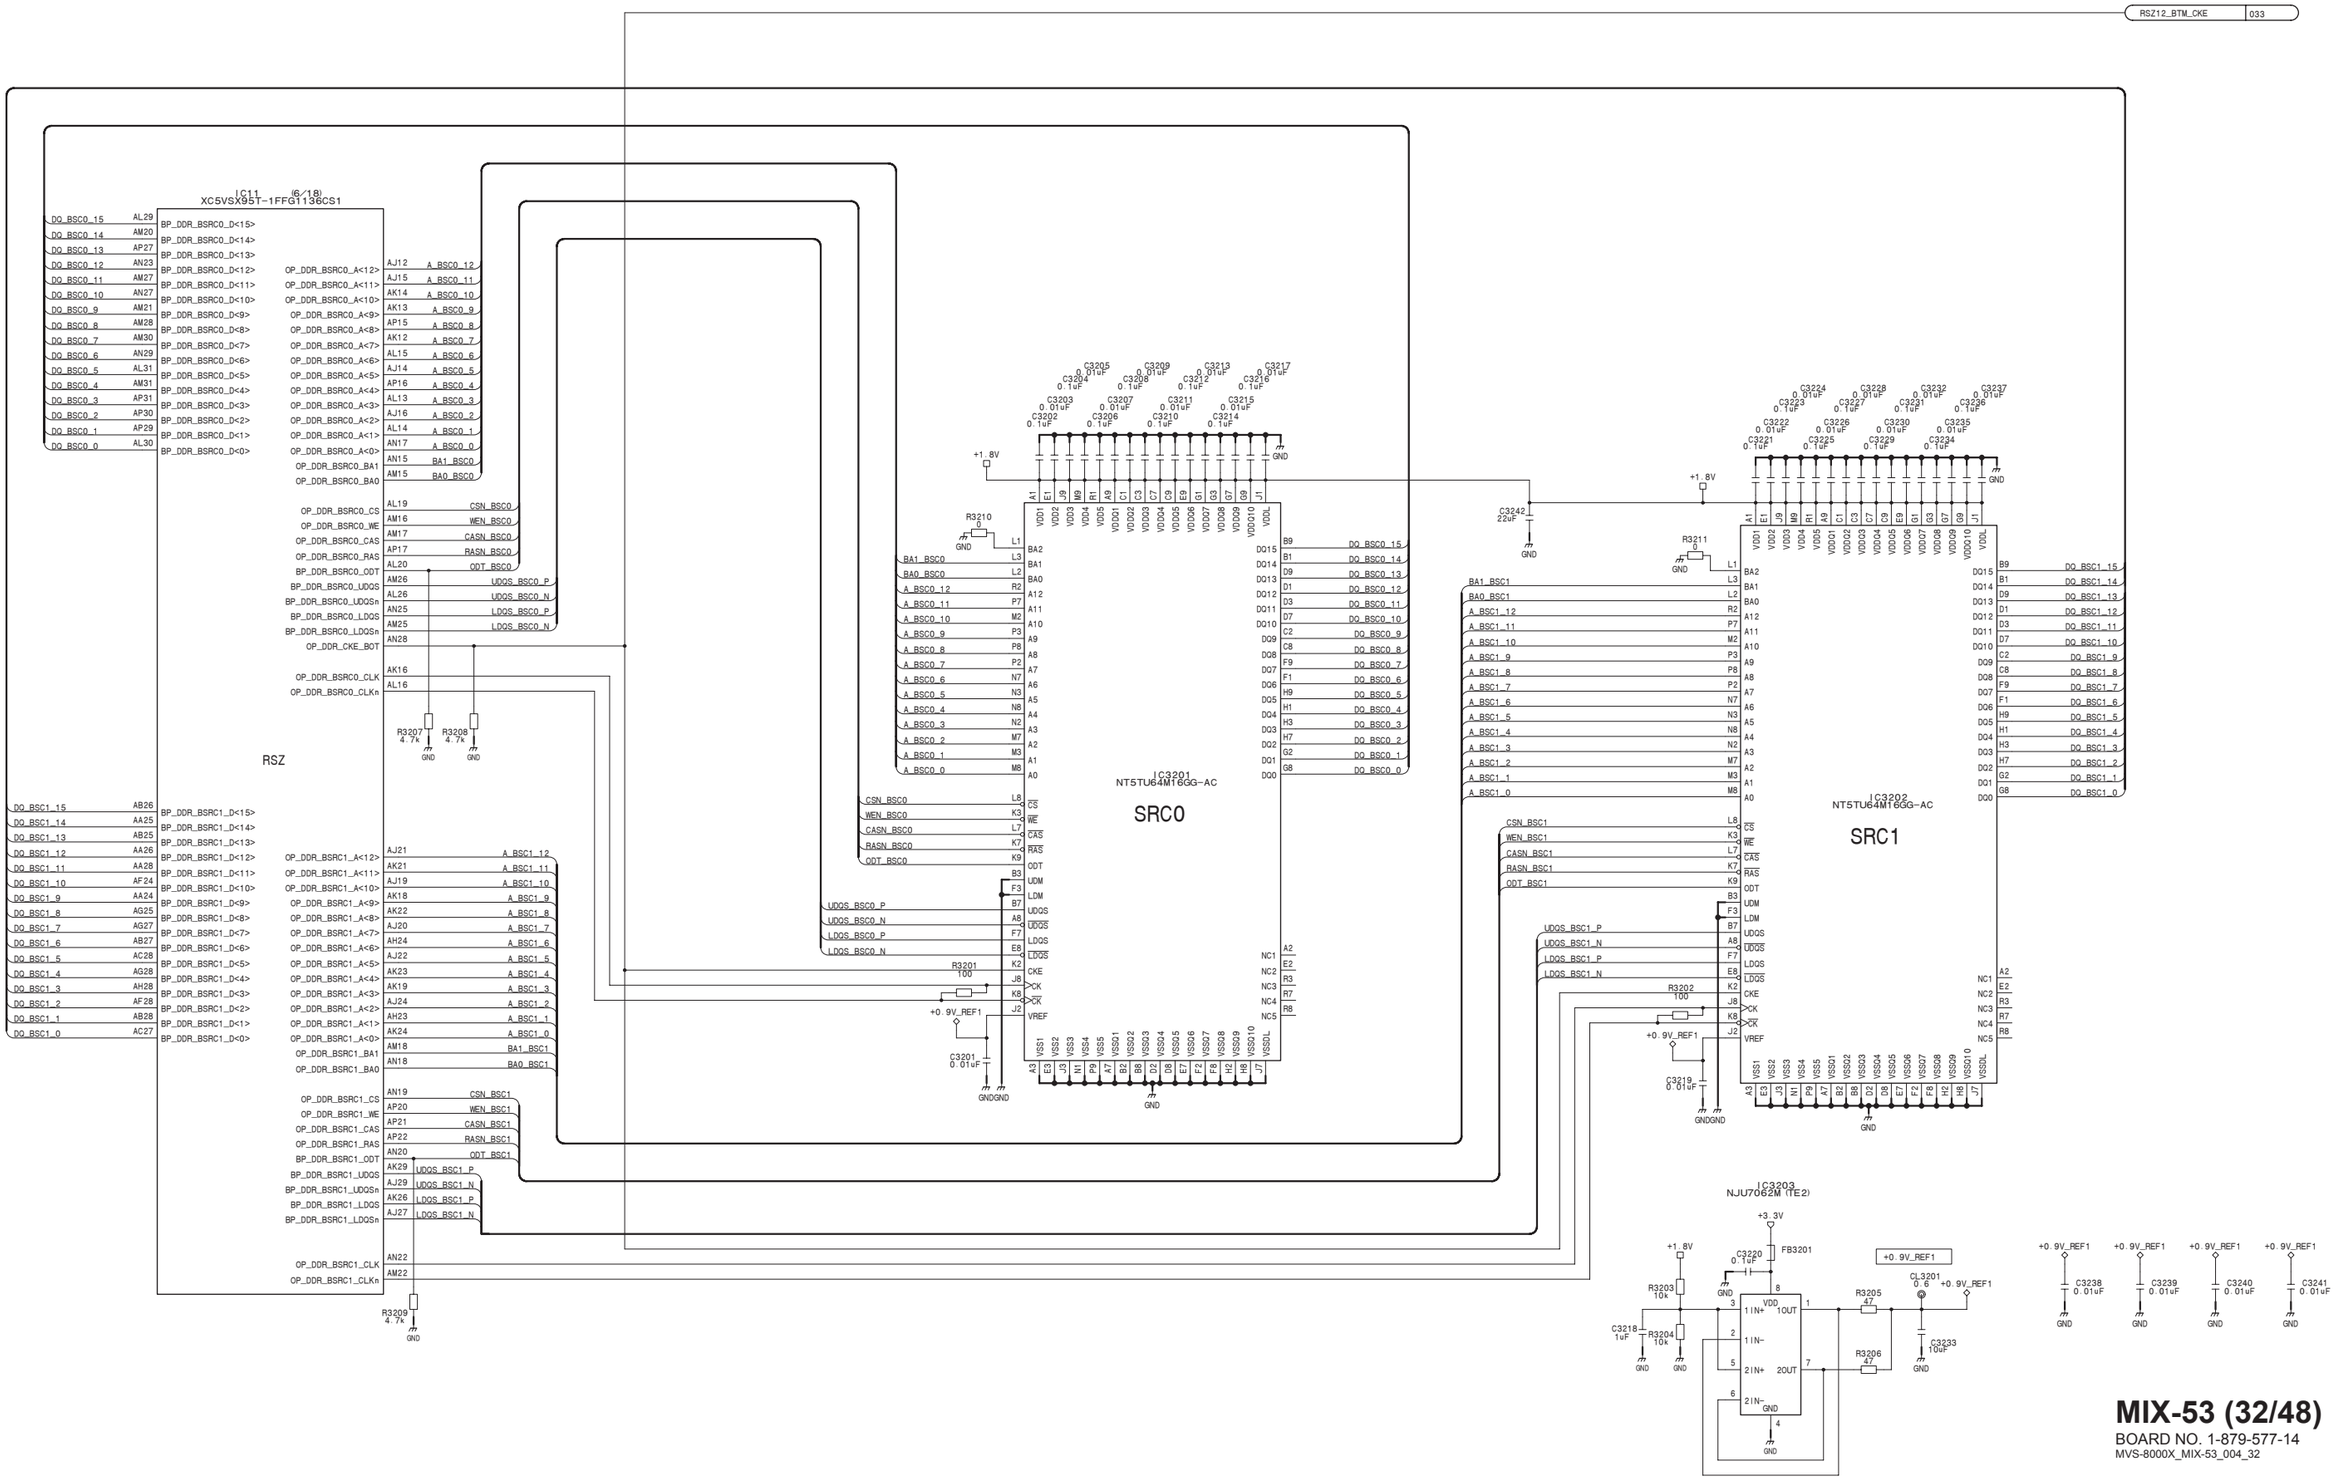

MIX-53 (32/48)

BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_32

MIX-53 (33/48)
SUFFIX: -14

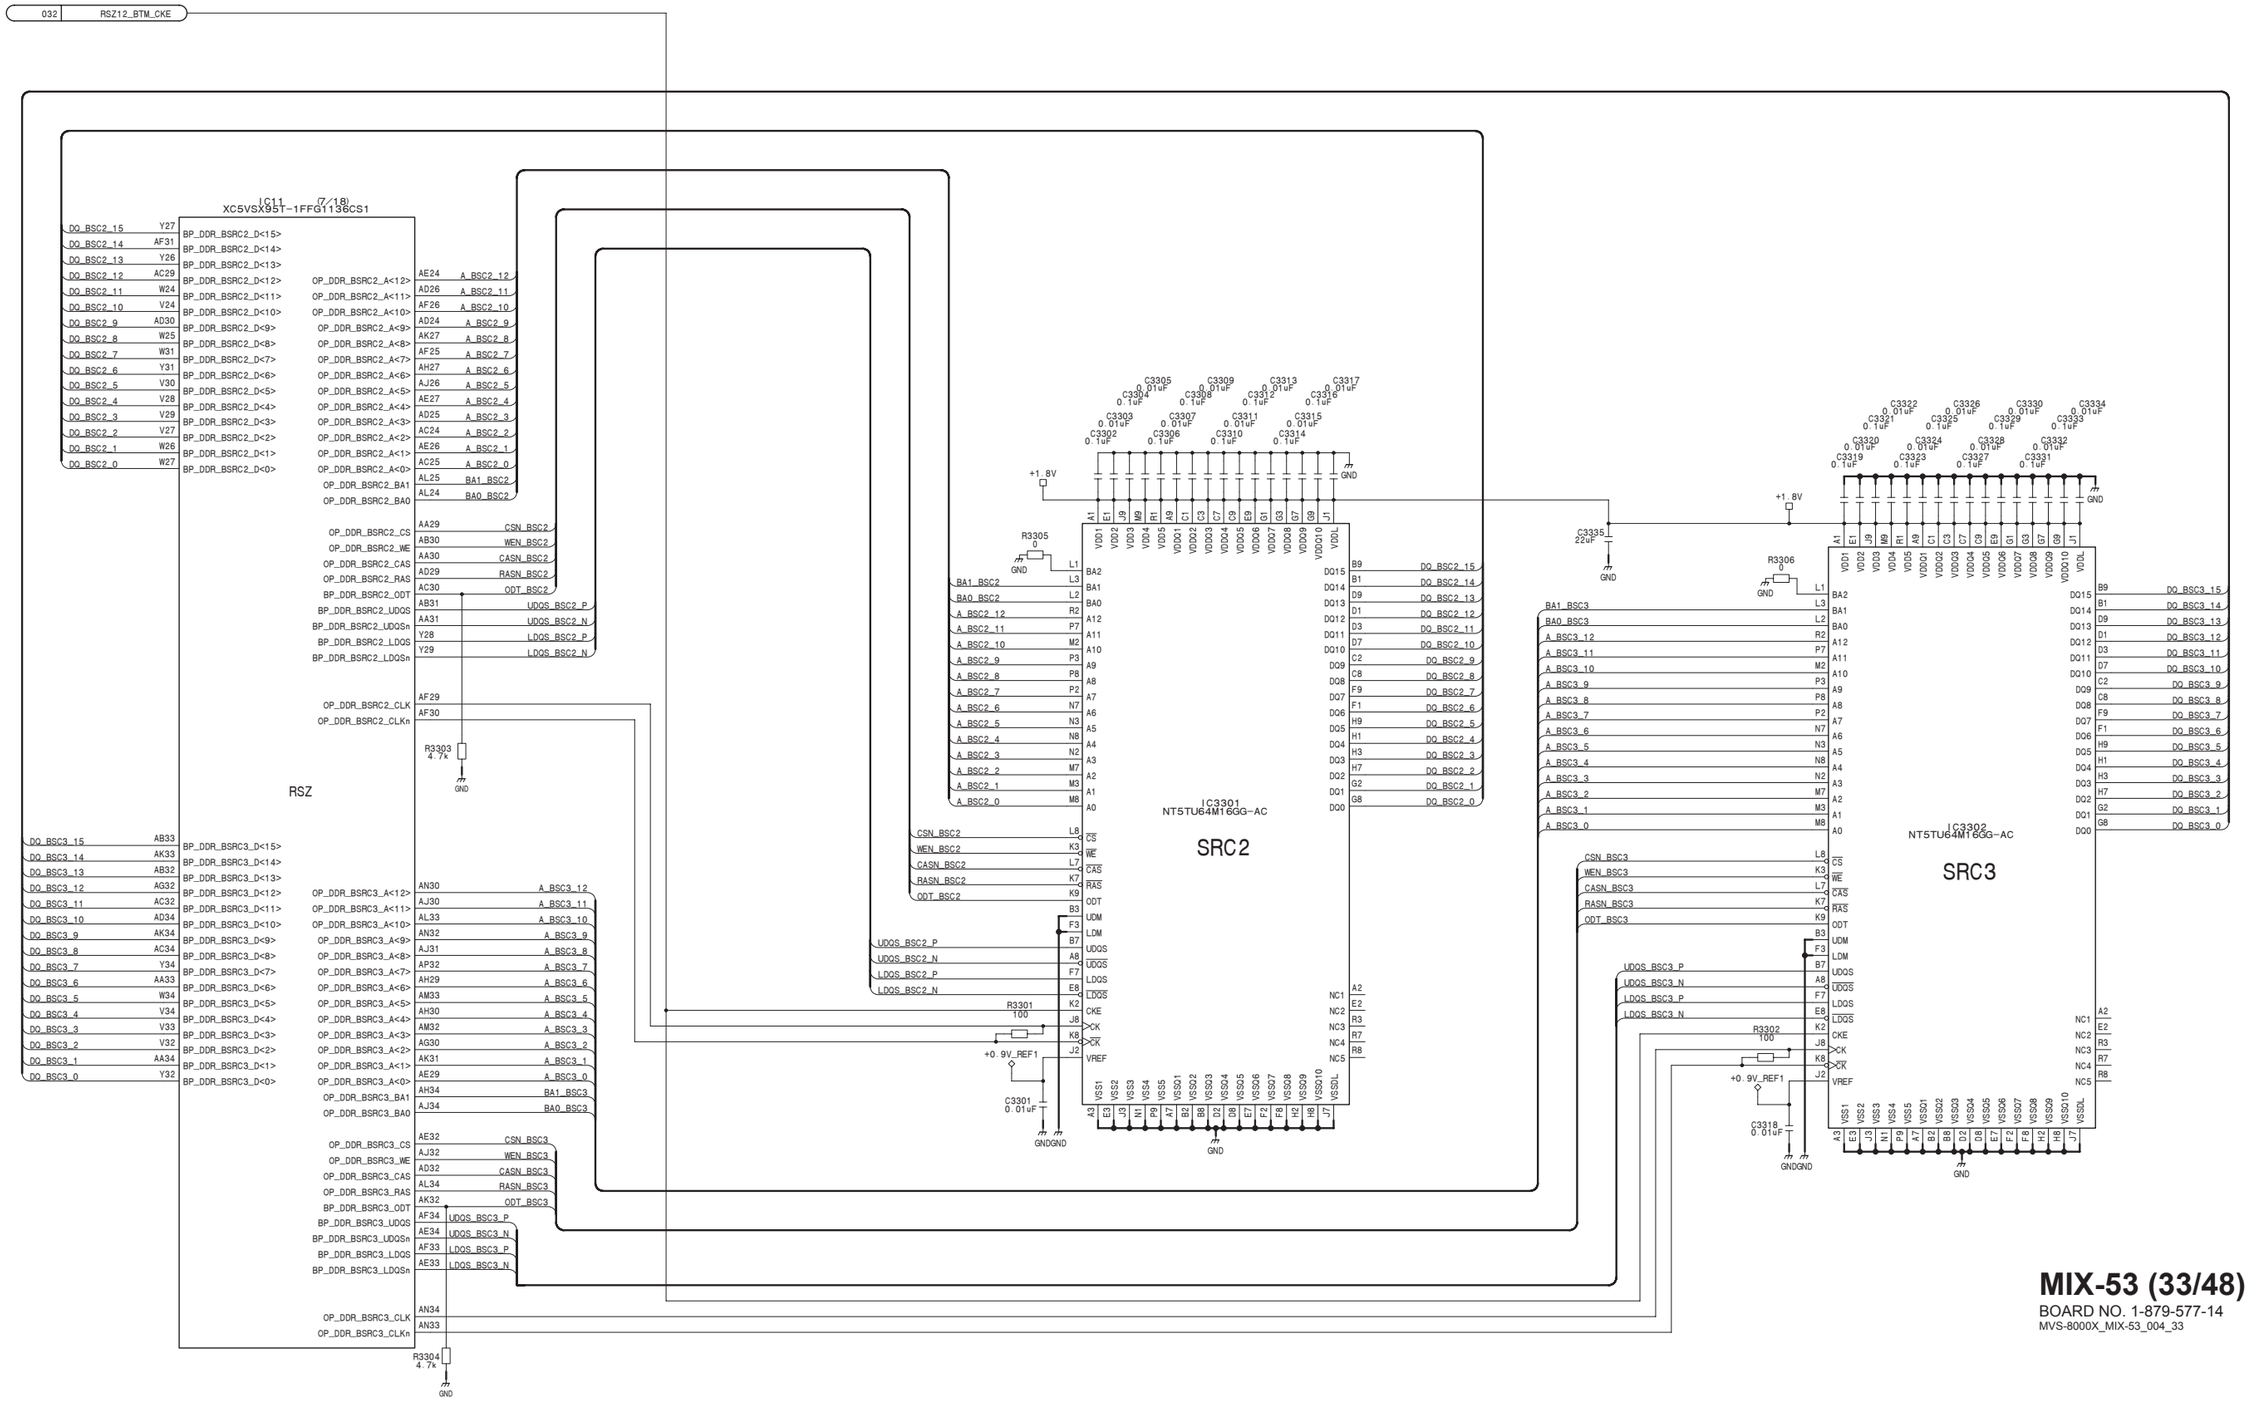

MIX-53 (33/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_33

RSZ34_TOP_CKE | 035

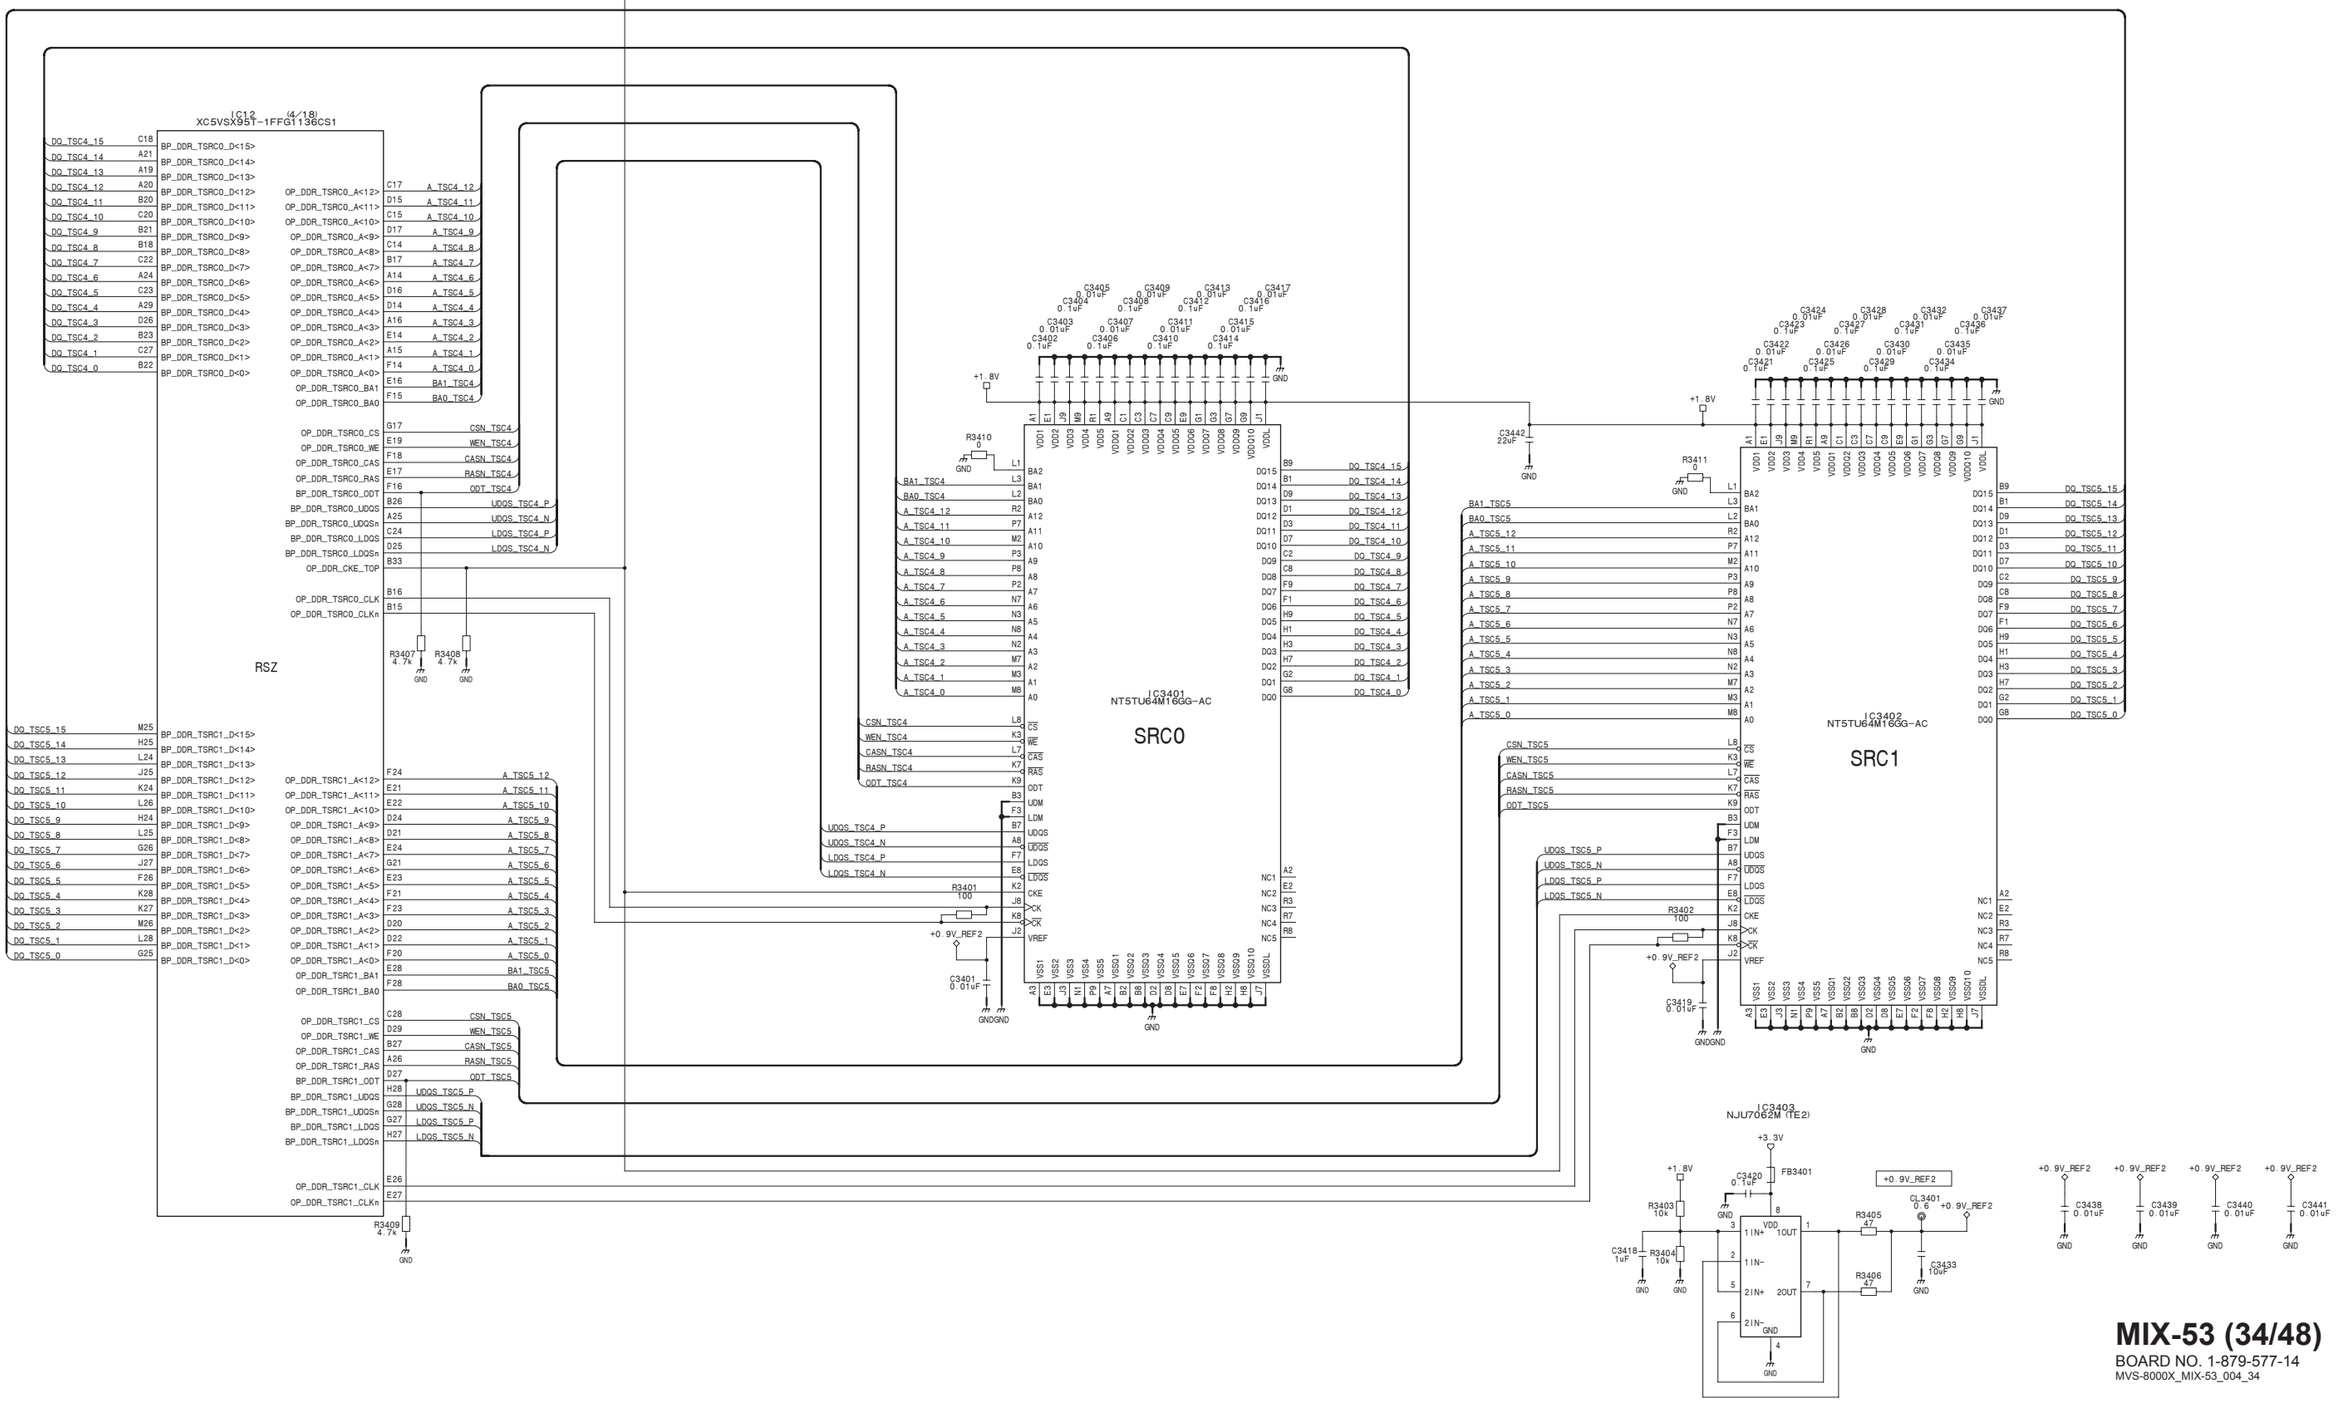

MIX-53 (34/48)

BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_34

MIX-53 (35/48)
SUFFIX: -14

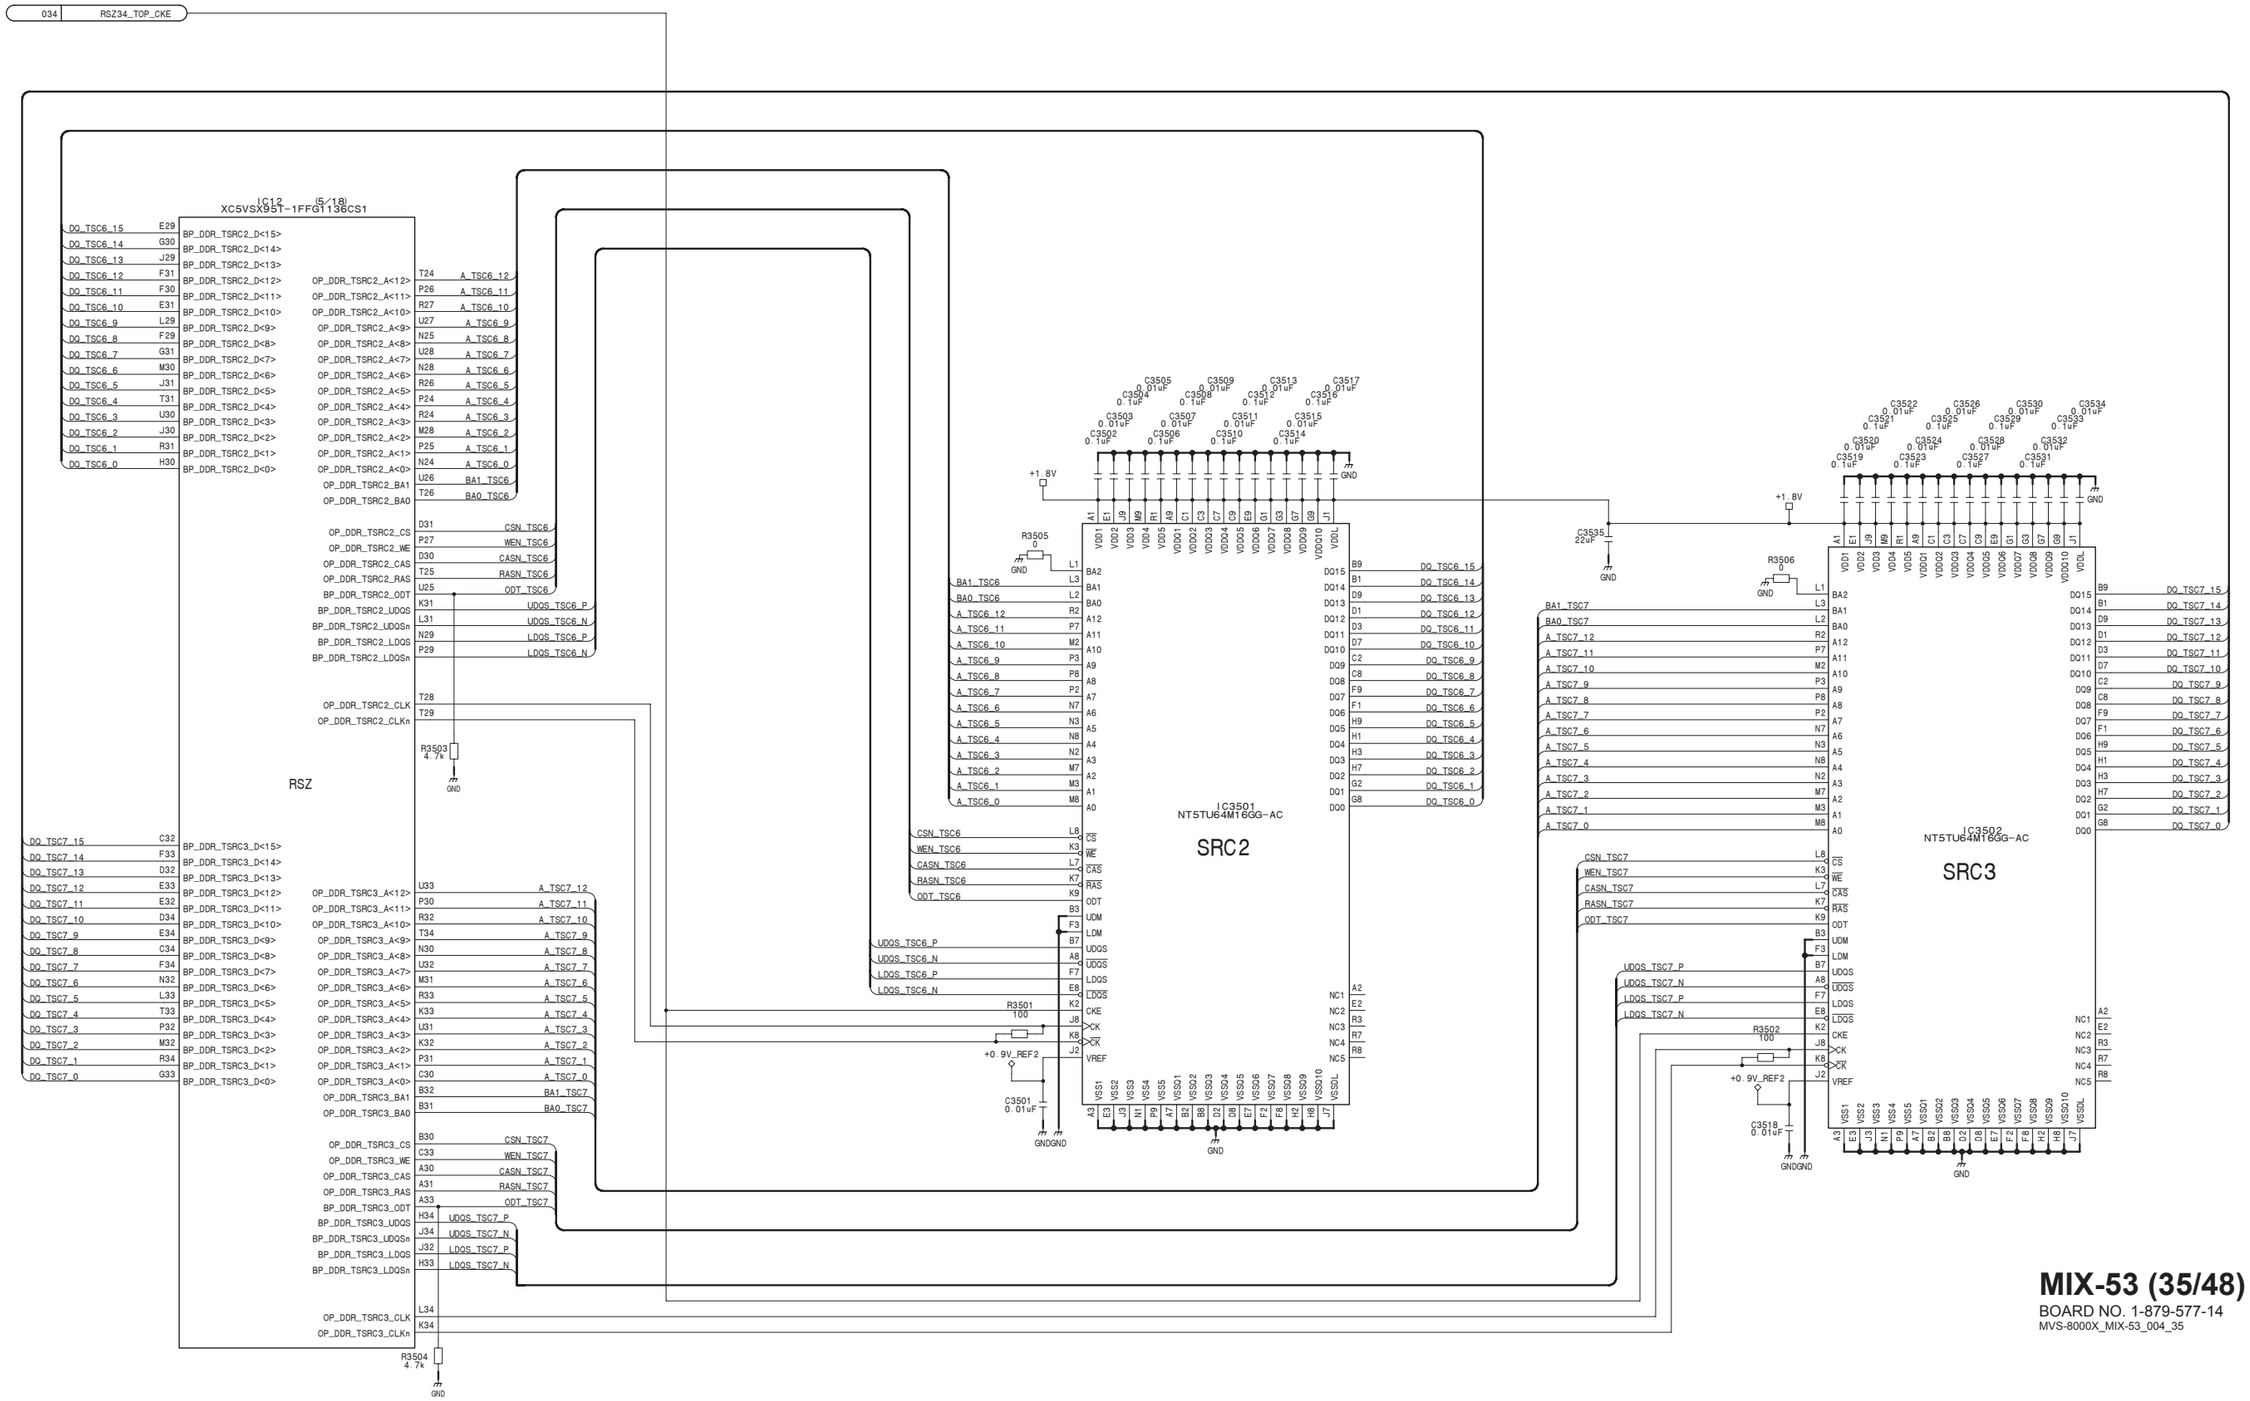

MIX-53 (36/48)
SUFFIX: -14

RSZ34_BTM_CKE | 037

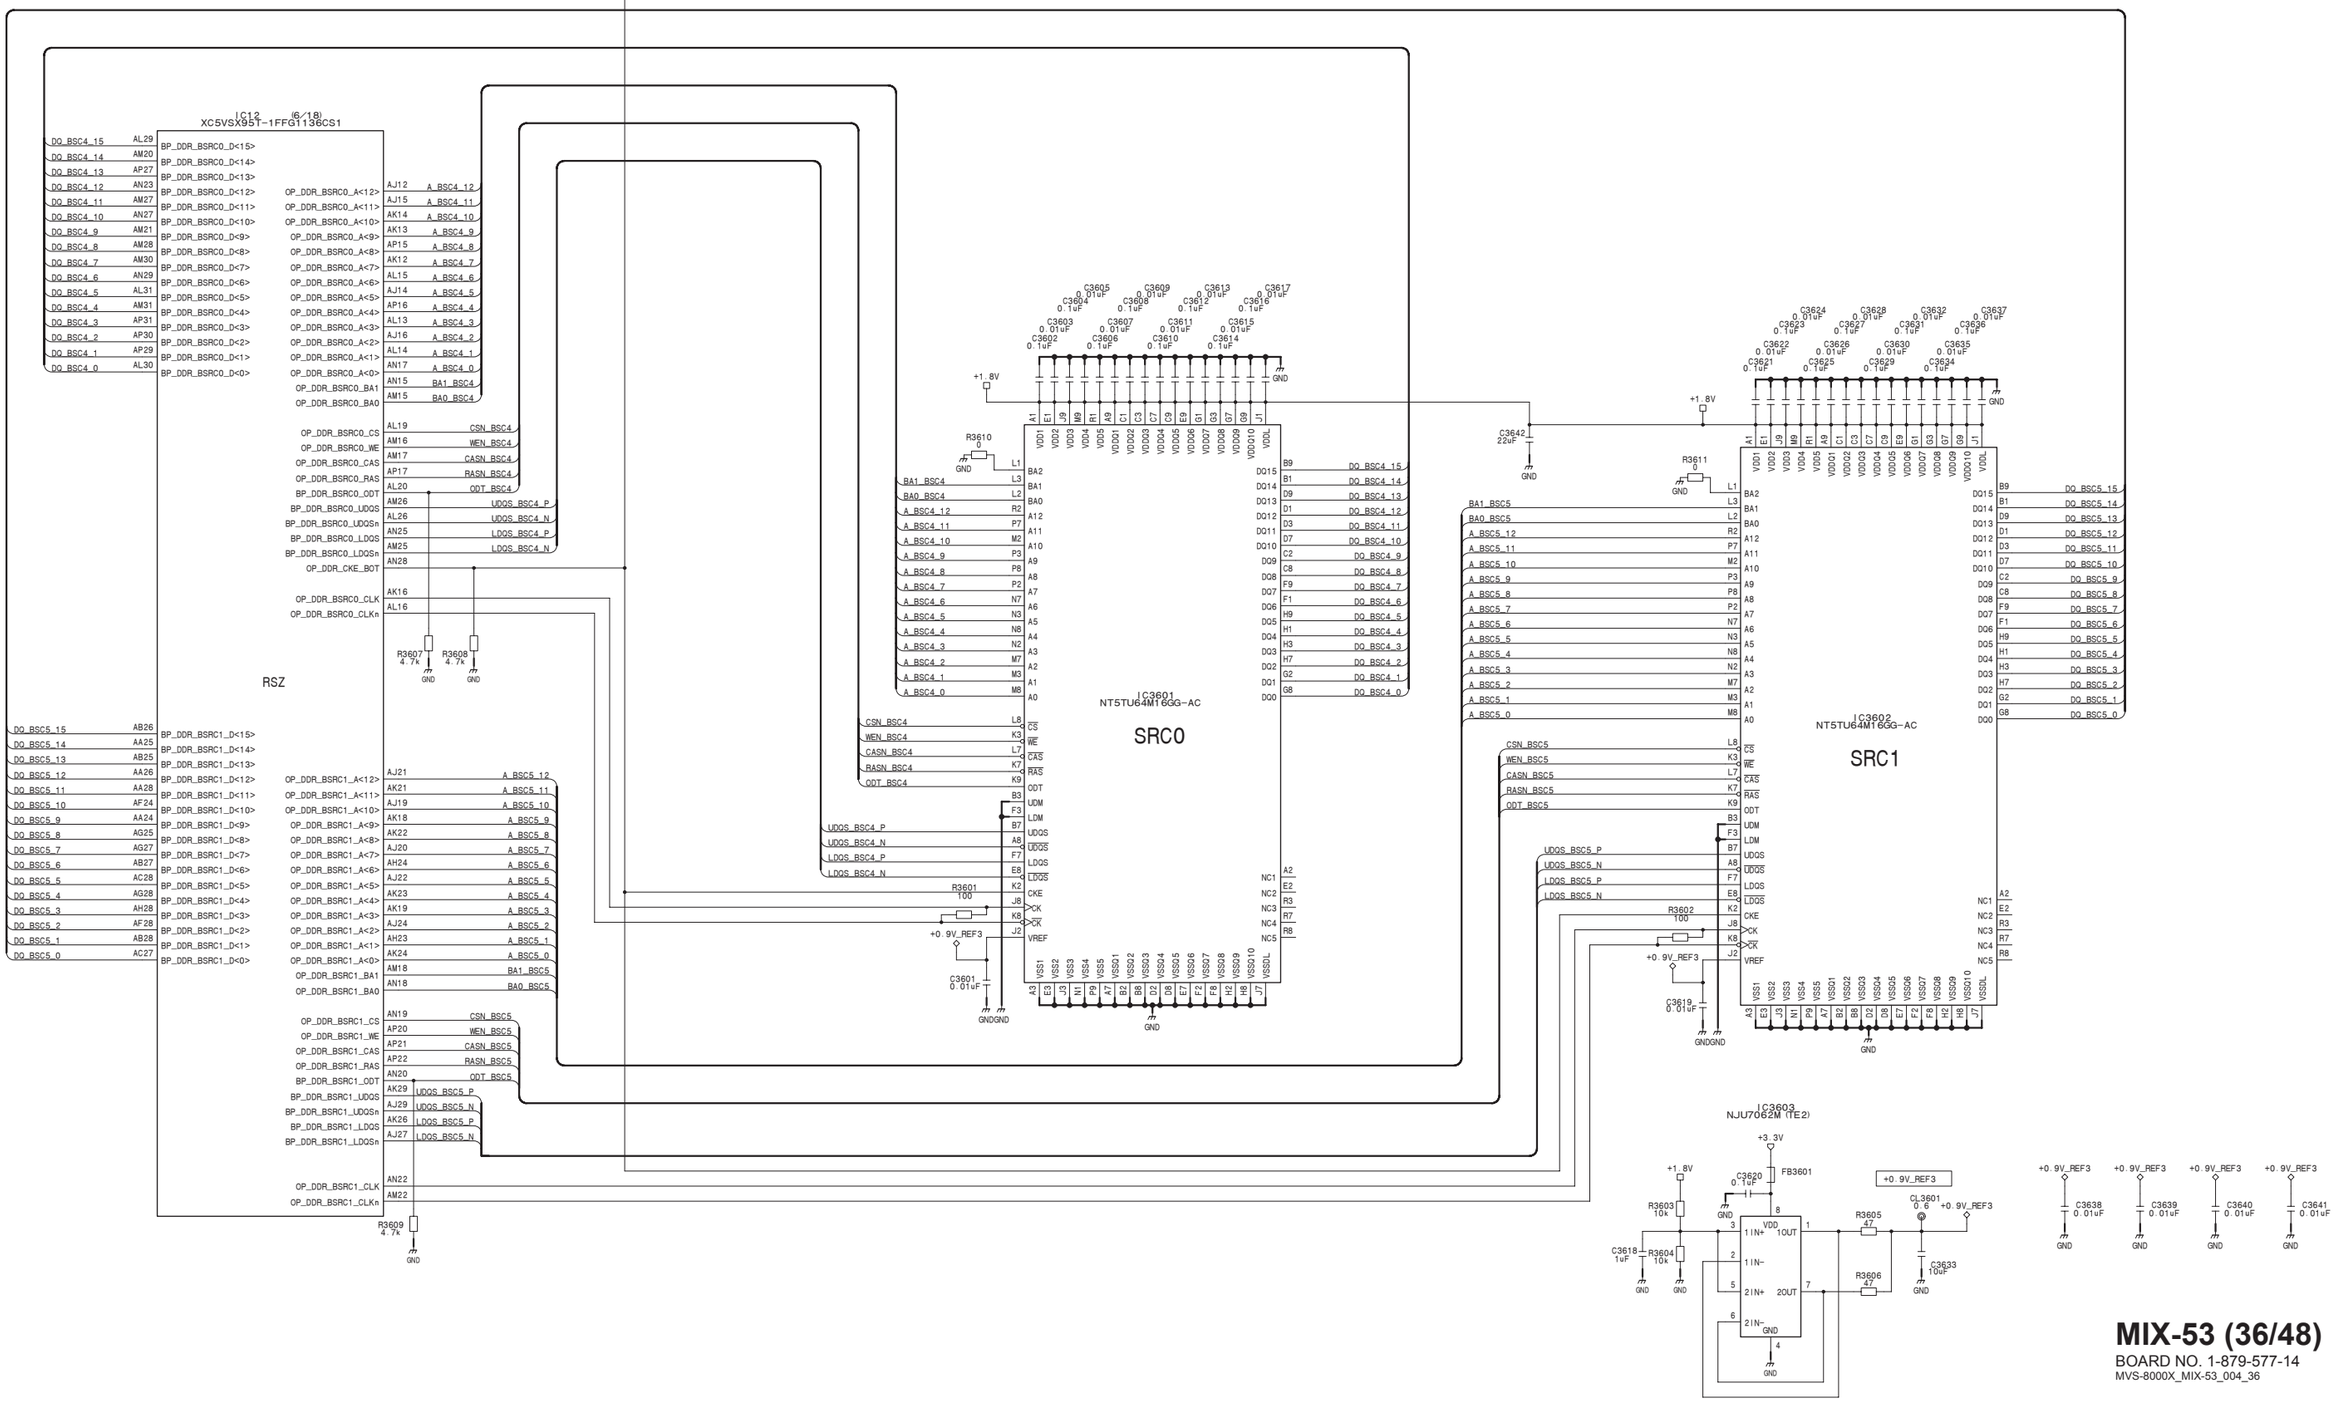

MIX-53 (36/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_36

MIX-53 (37/48)
SUFFIX: -14

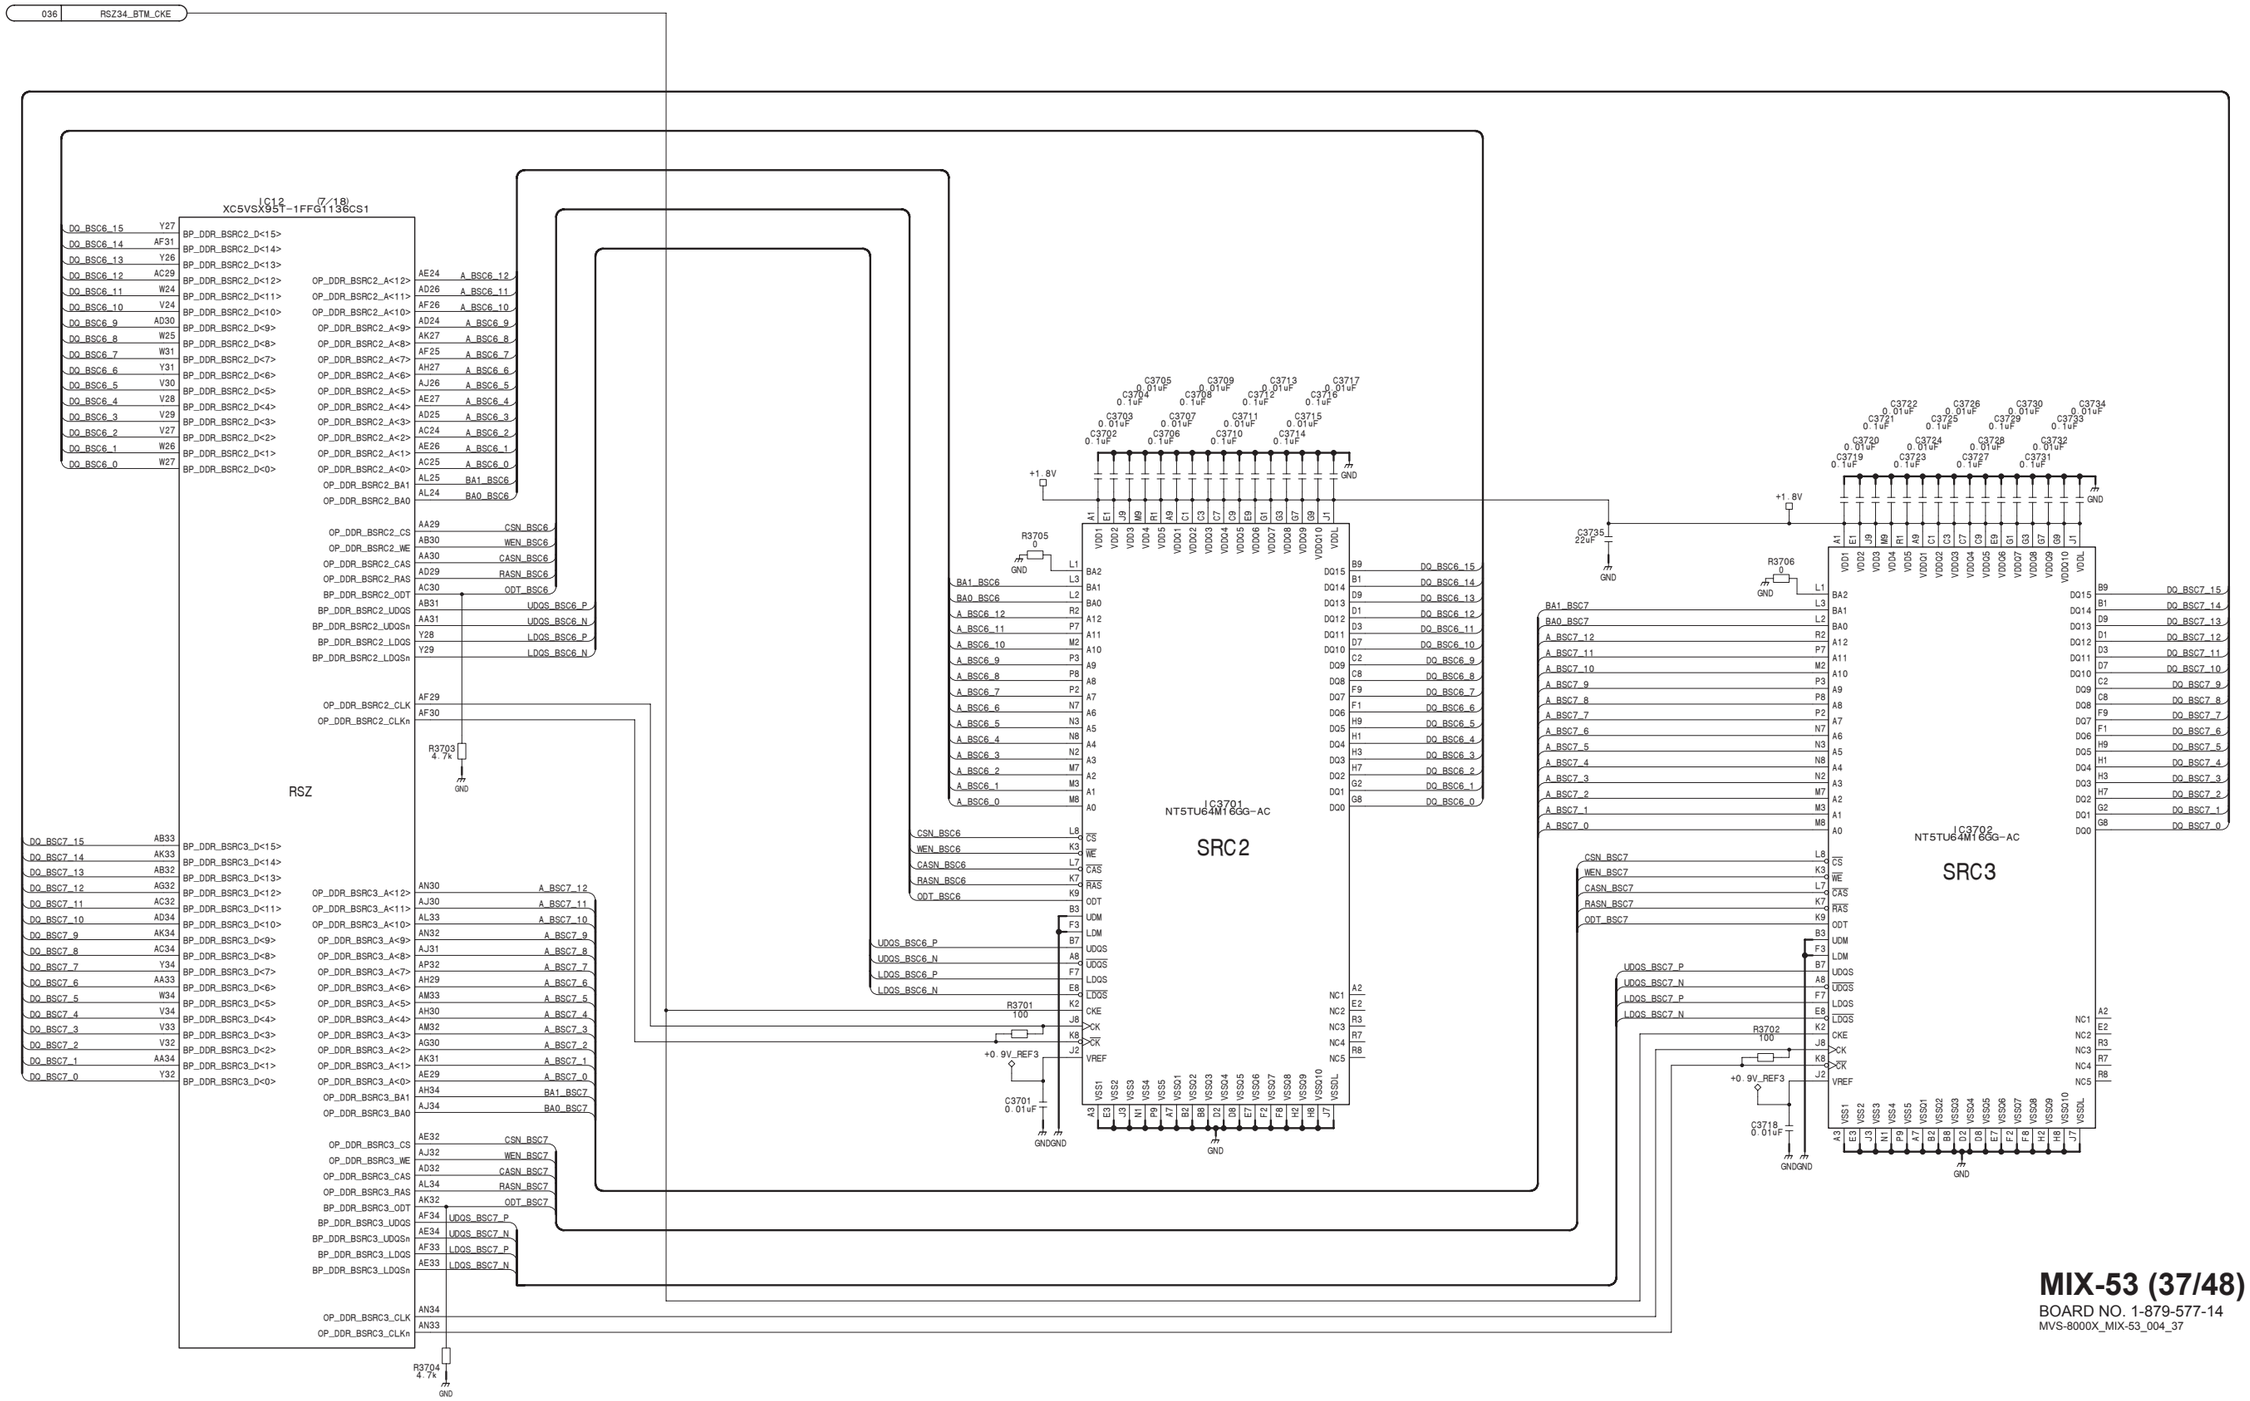

MIX-53 (37/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_37

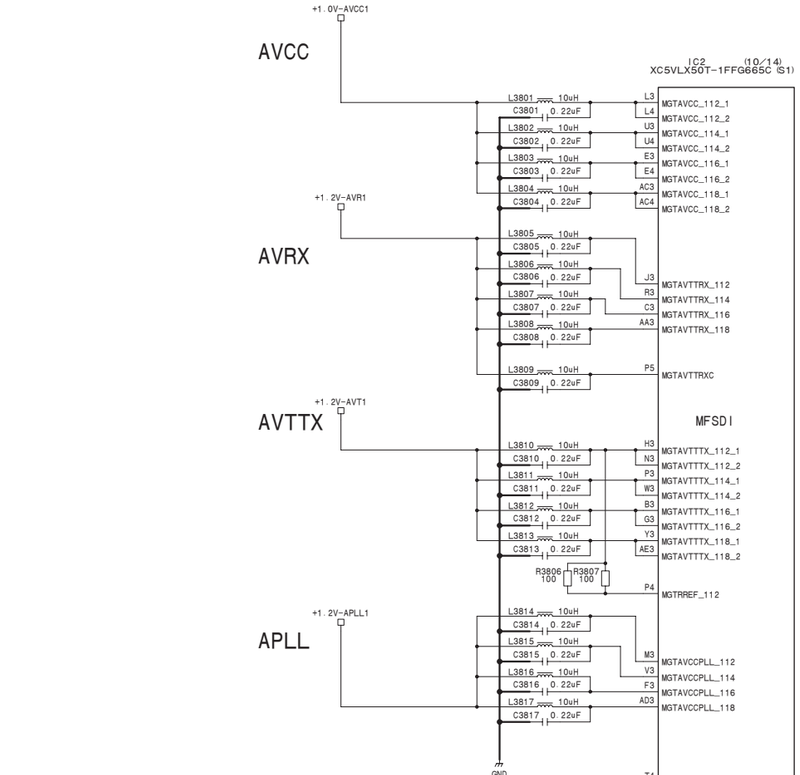

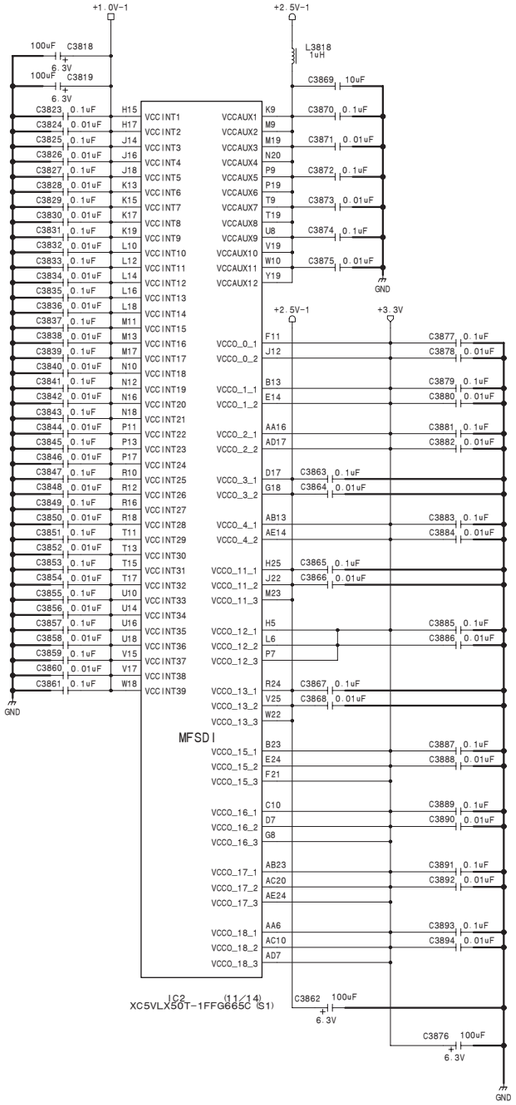

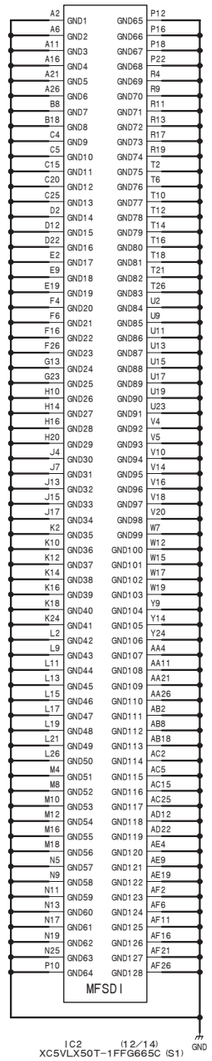

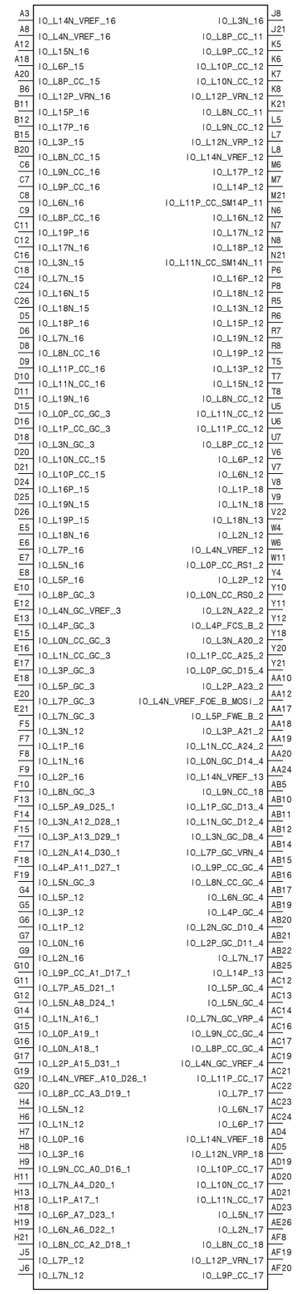

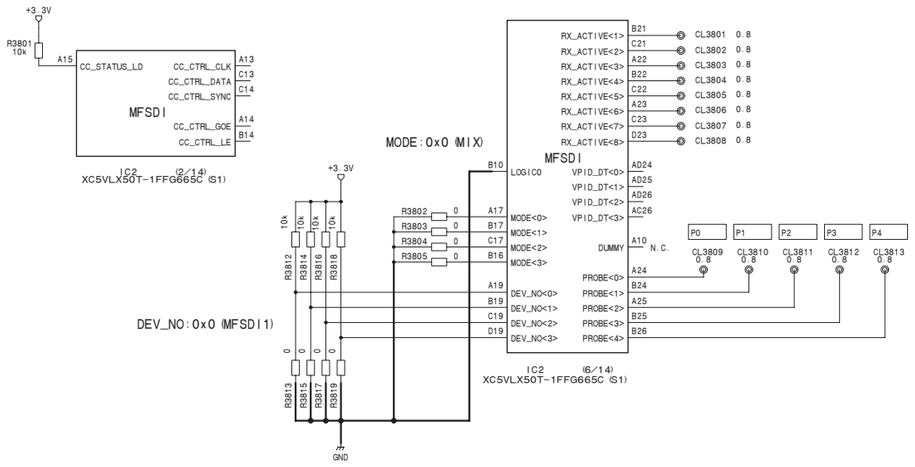



MIX-53 (38/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_38

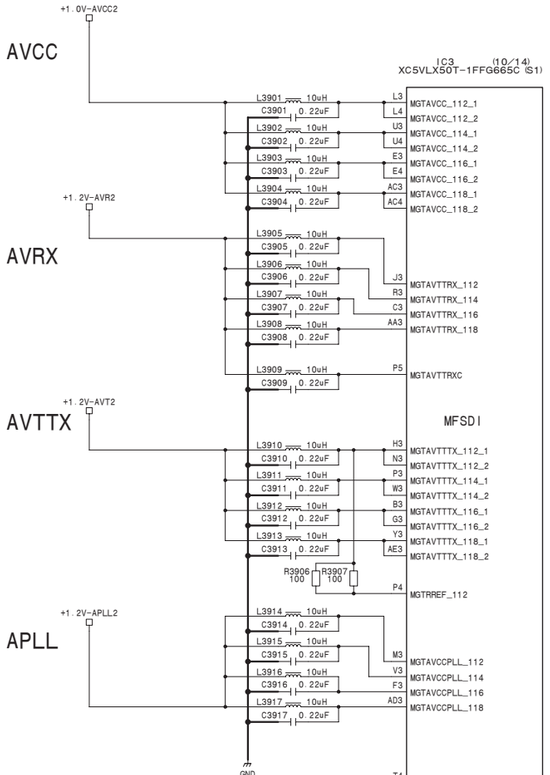

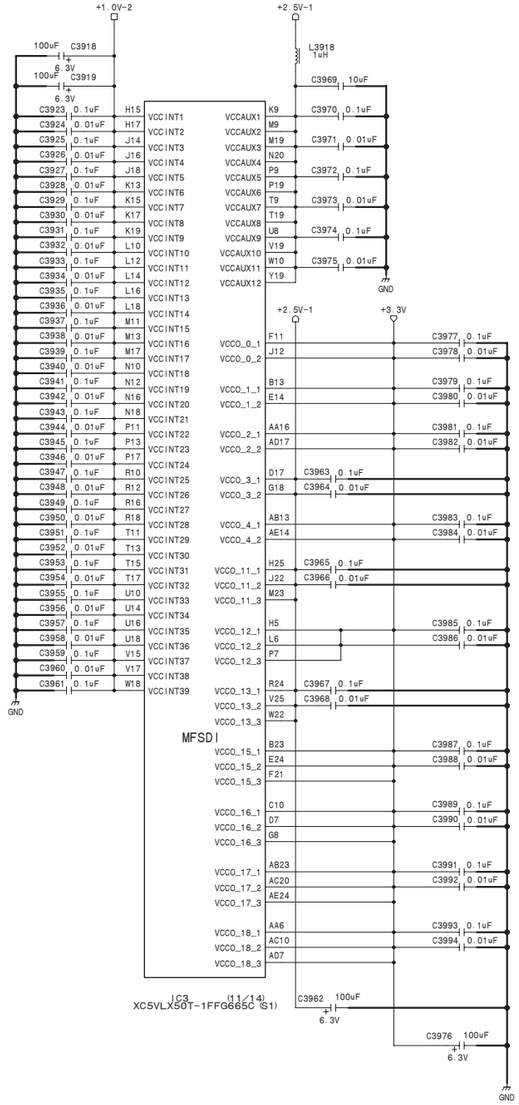

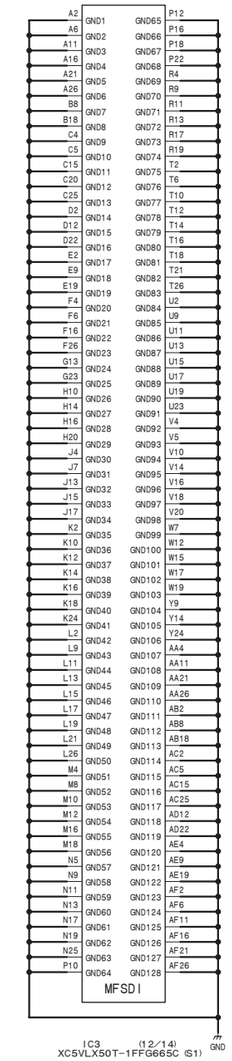

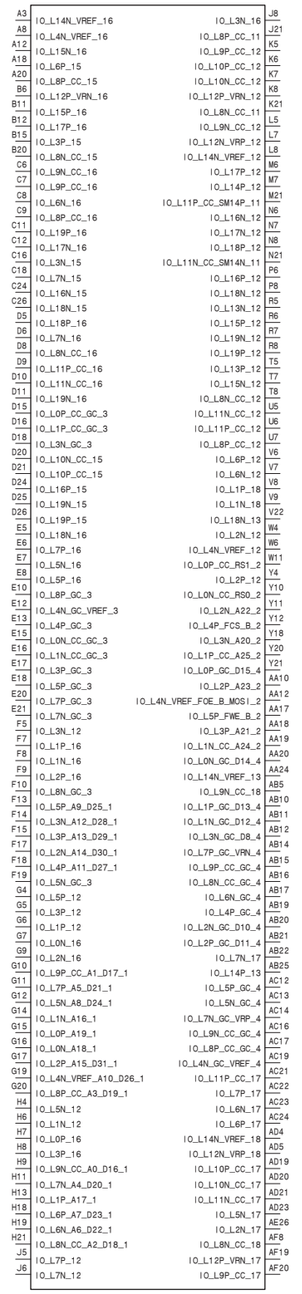

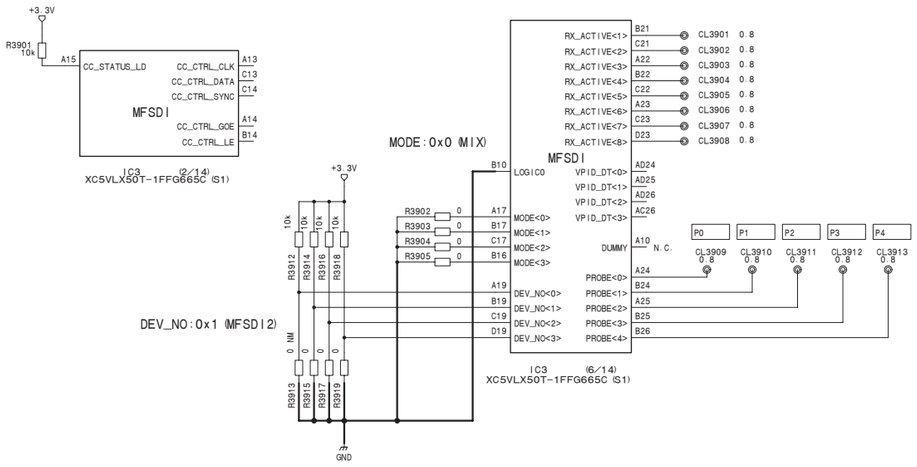



MIX-53 (39/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_39

MIX-53 (40/48)
SUFFIX: -14

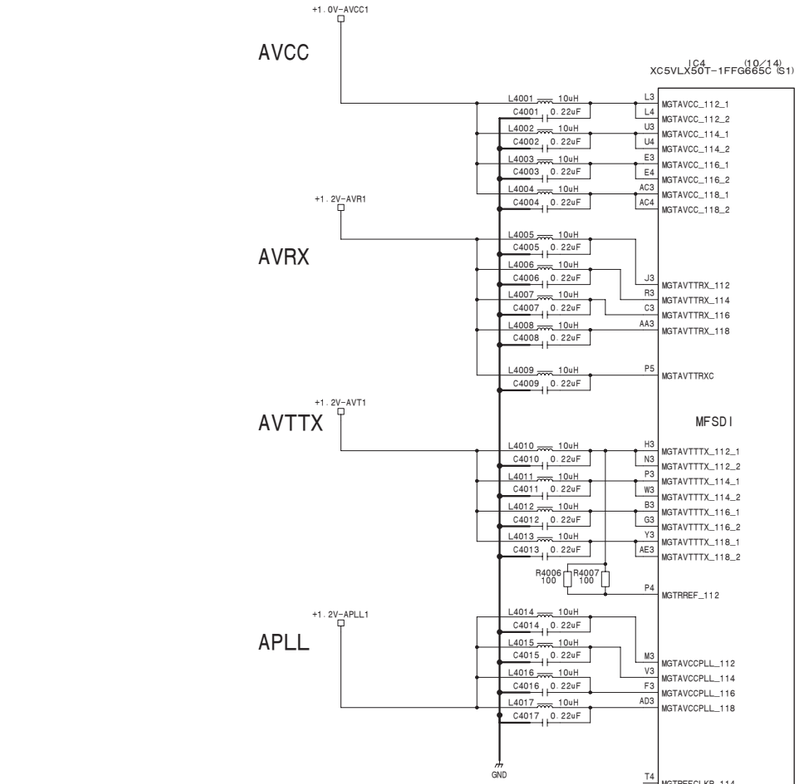

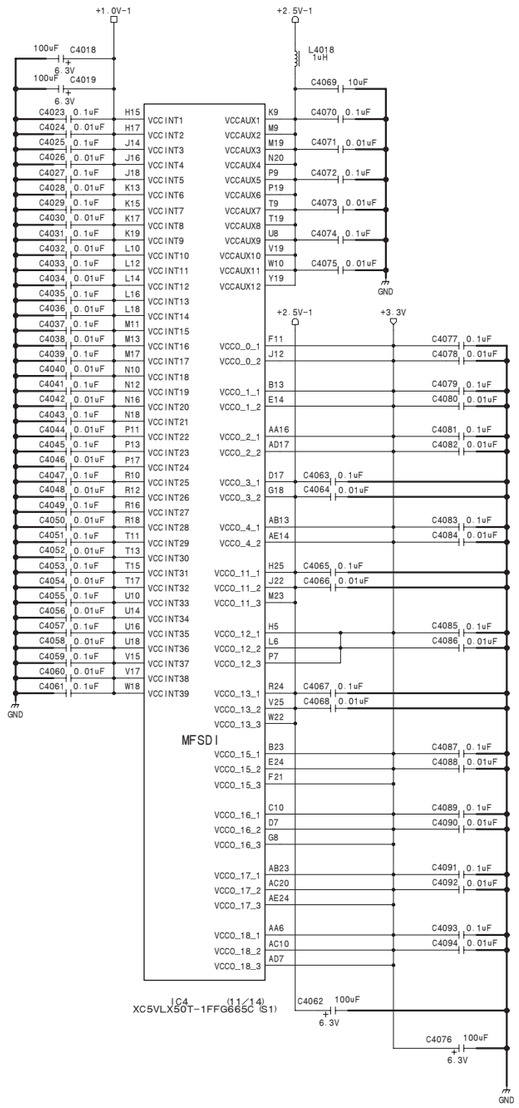

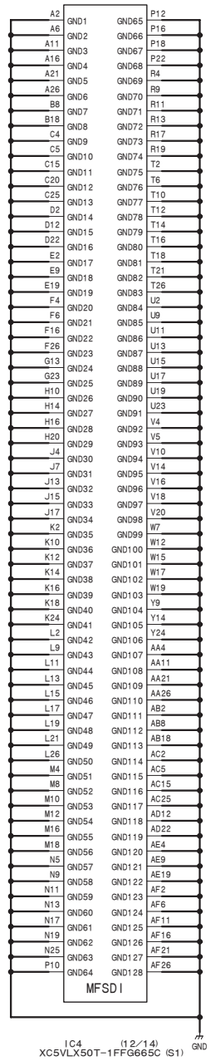

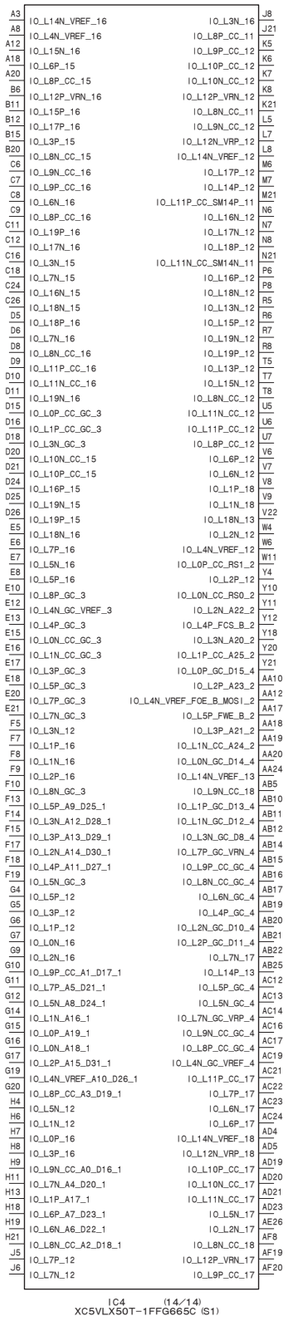

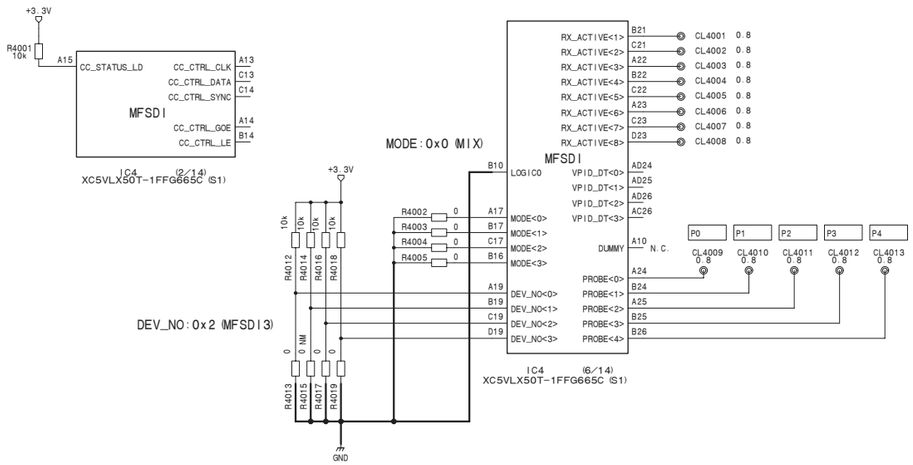



MIX-53 (40/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_40

4-226 (a)

MIX-53 (41/48)

SUFFIX: -14

MIX-53 (41/48)

SUFFIX: -14

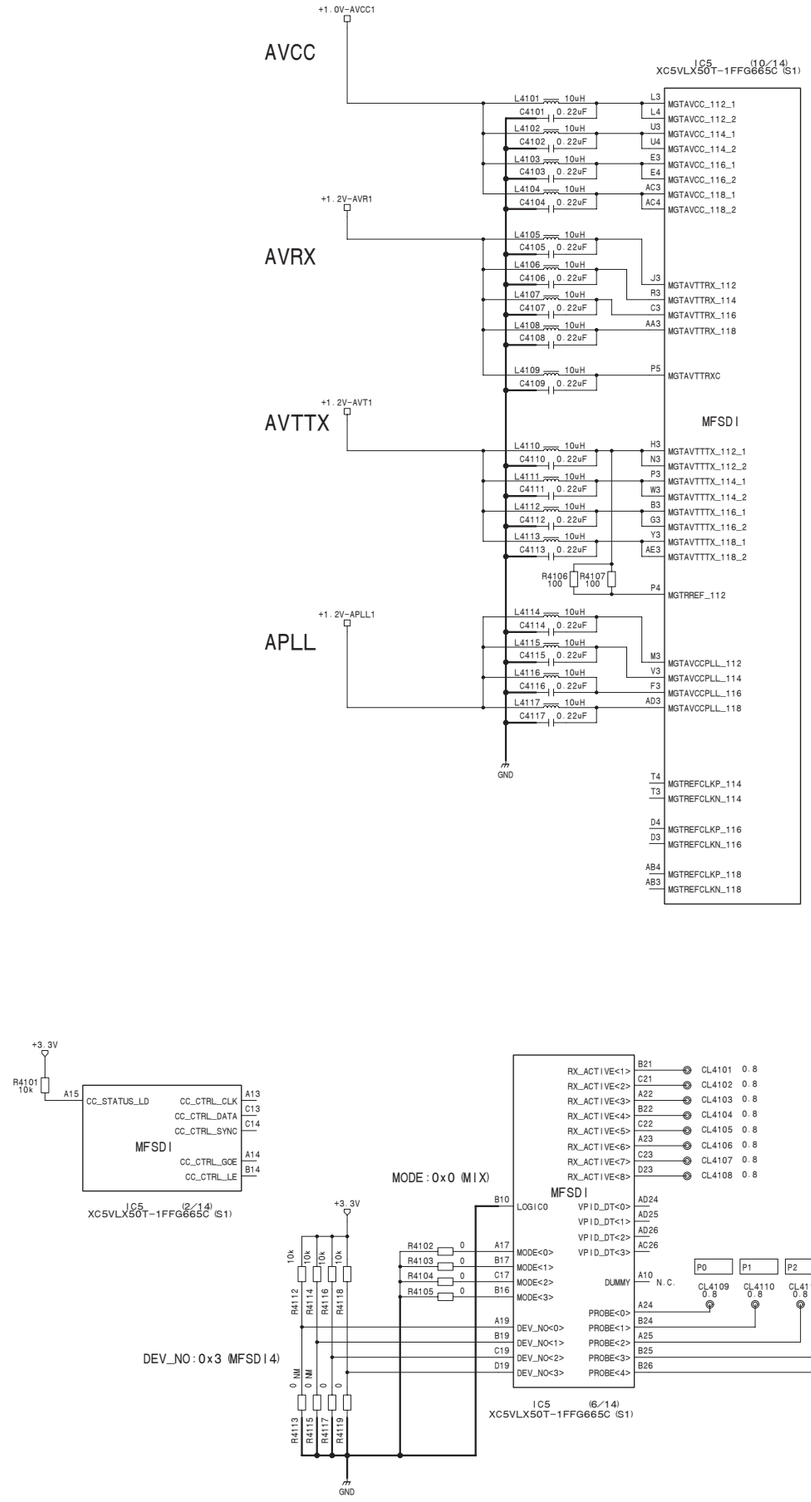

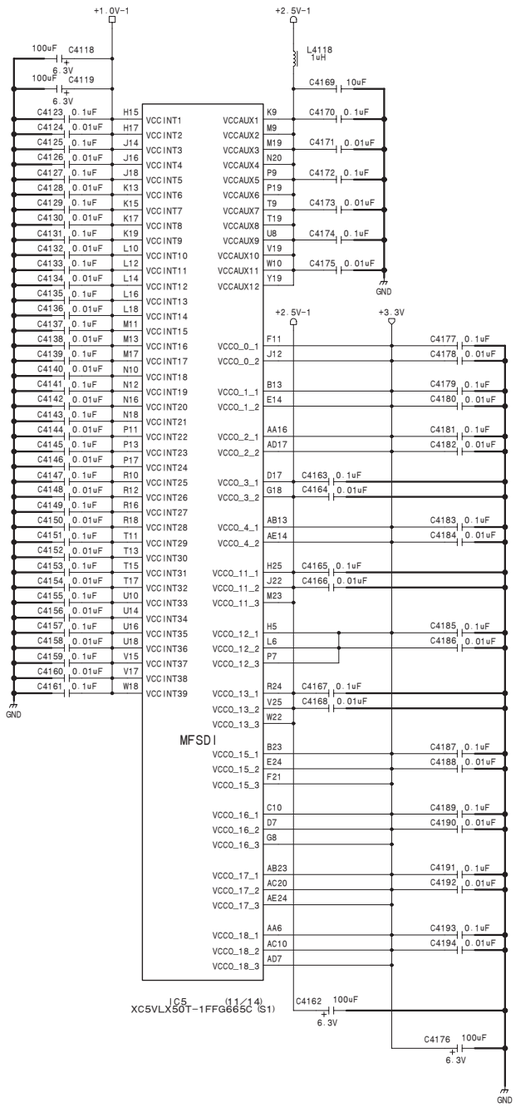

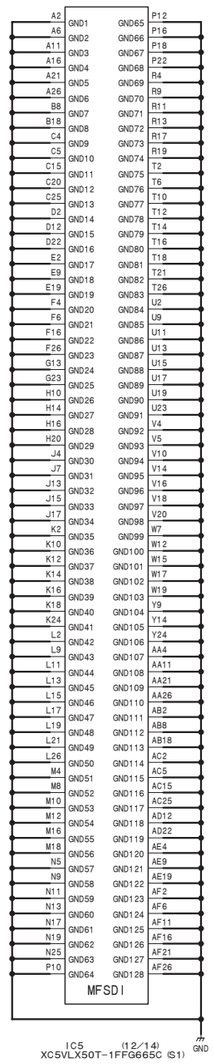

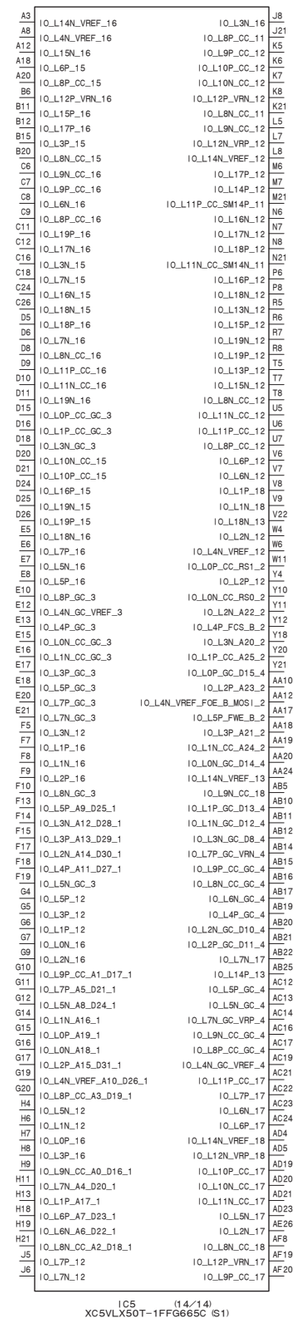

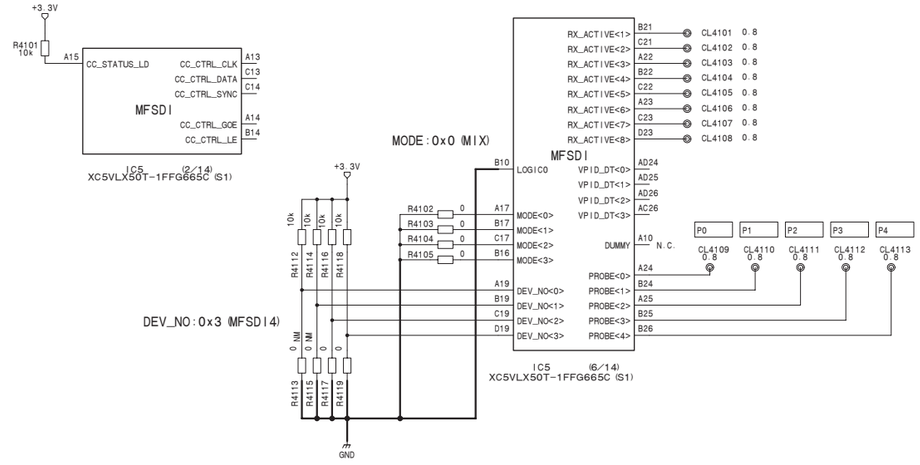





MIX-53 (41/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_41

MIX-53 (42/48)
SUFFIX: -14

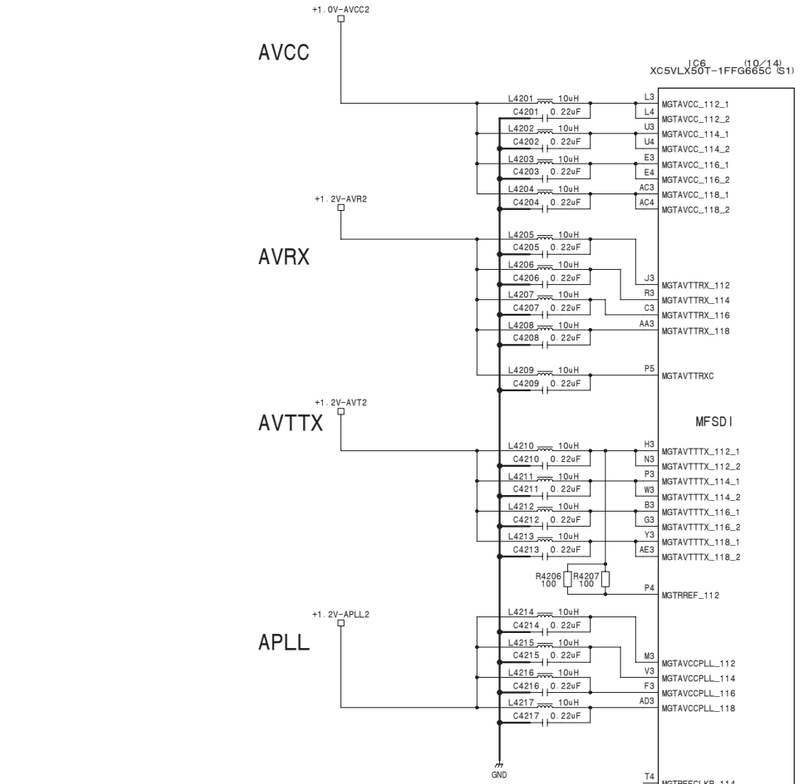

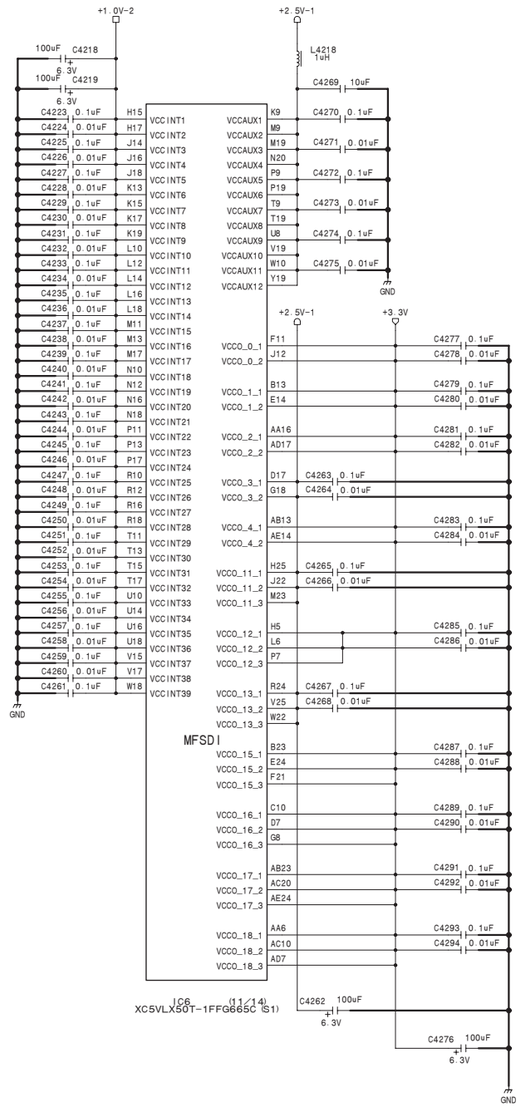

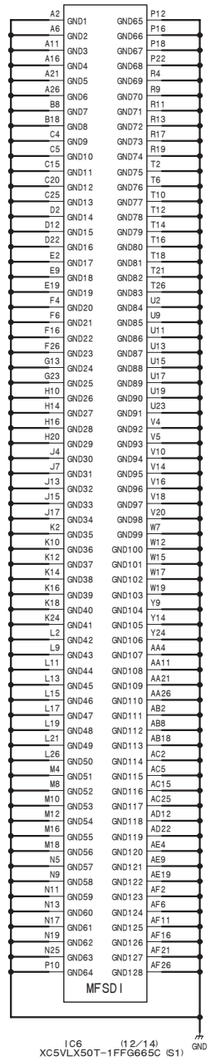

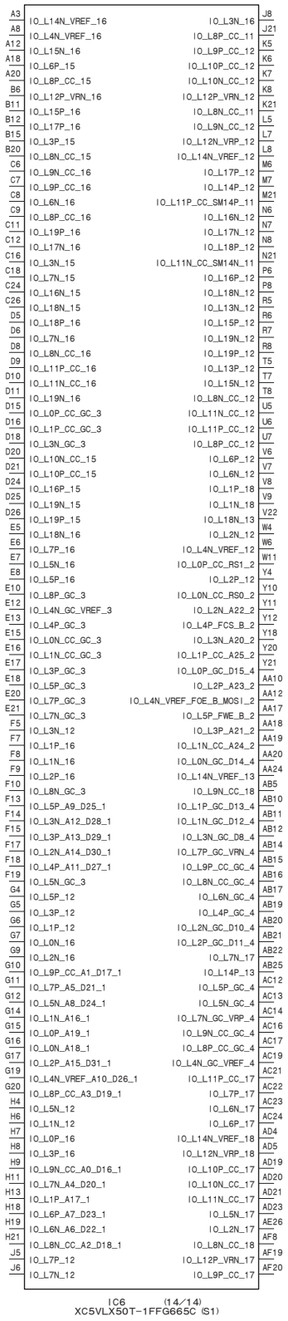

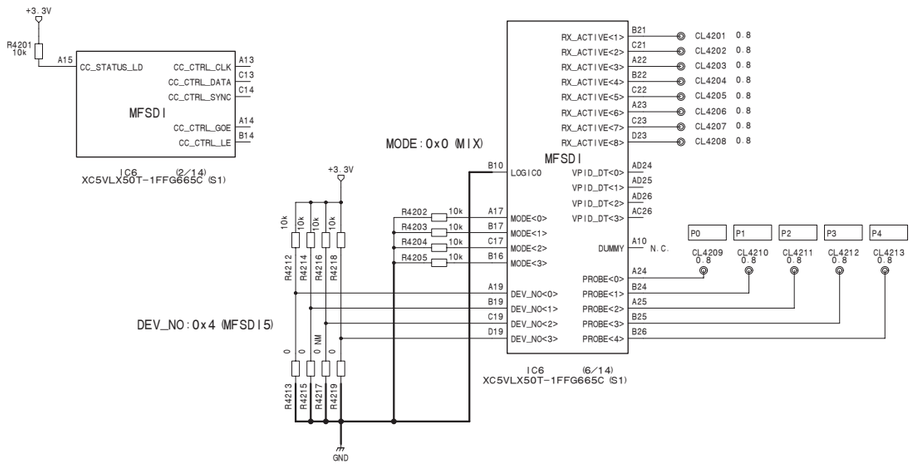





MIX-53 (42/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_42

MIX-53 (43/48)

SUFFIX: -14

MIX-53 (43/48)

SUFFIX: -14

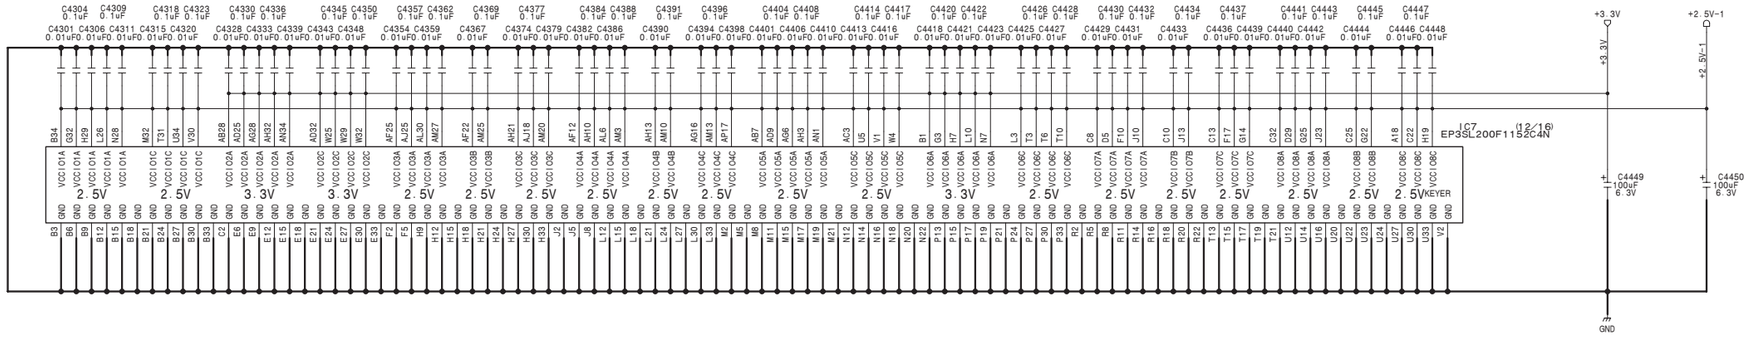

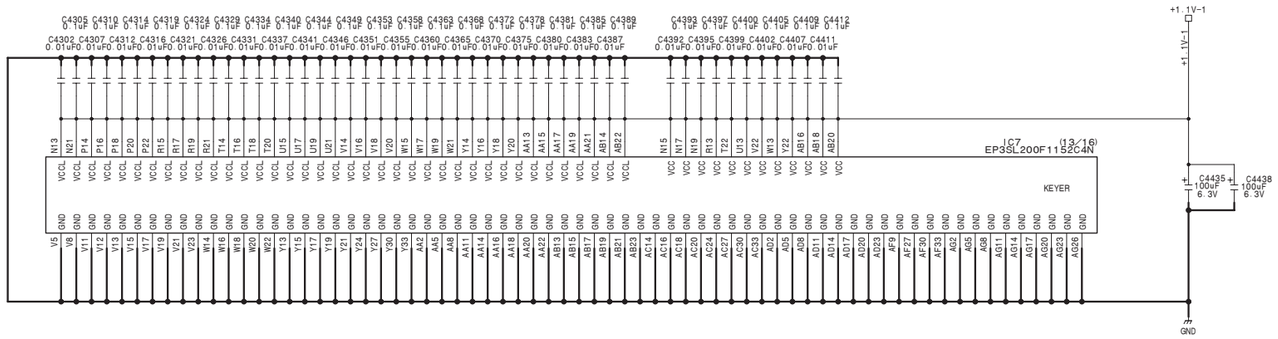

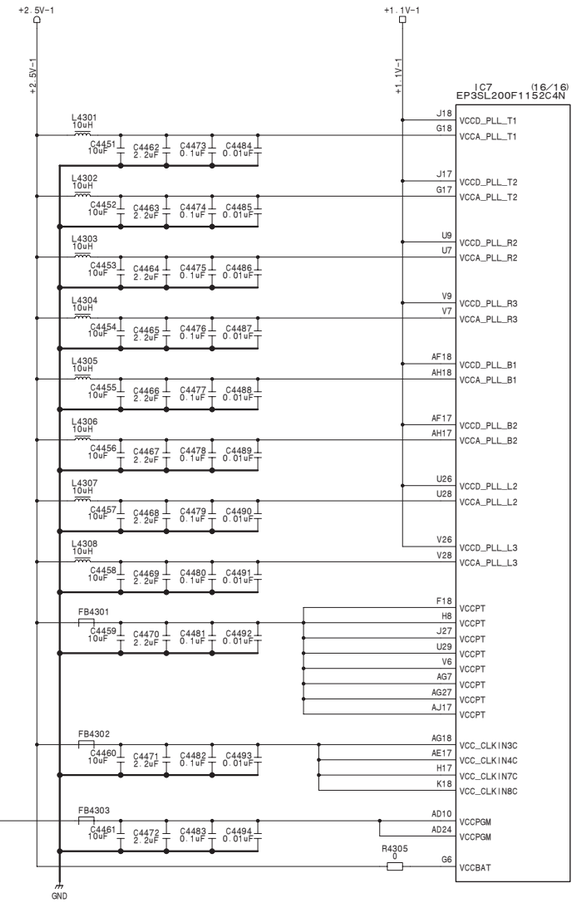

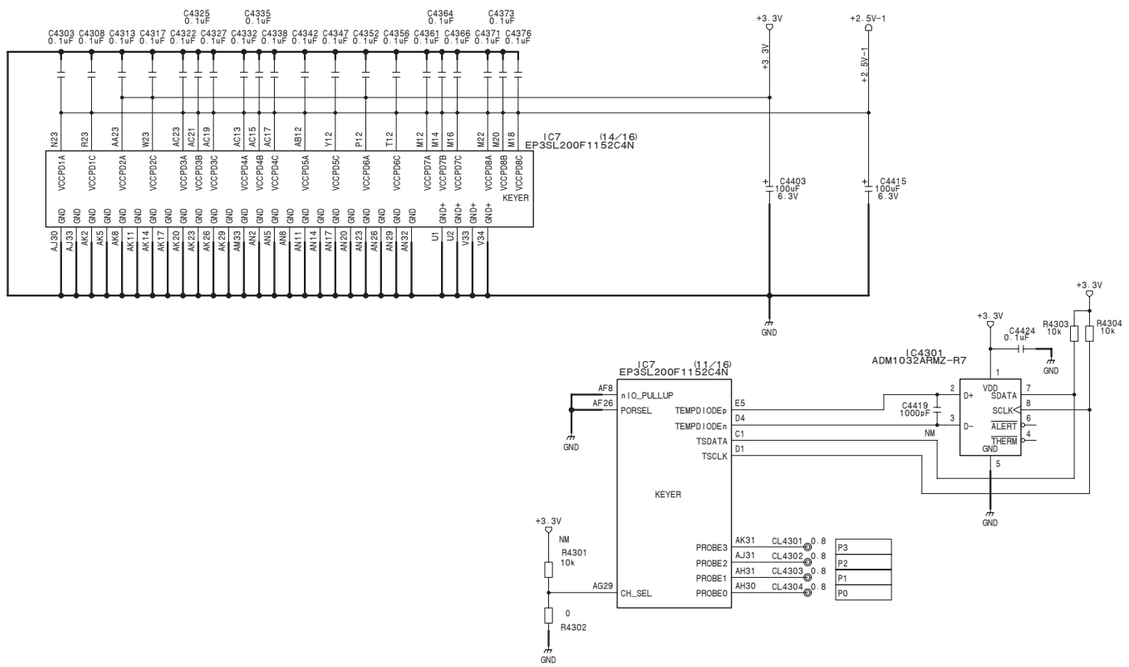

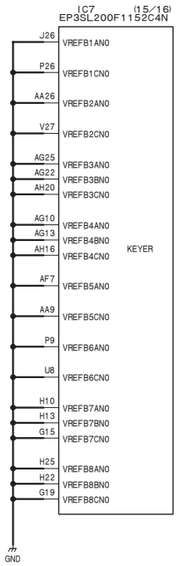

MIX-53 (43/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_43

MIX-53 (44/48)
SUFFIX: -14

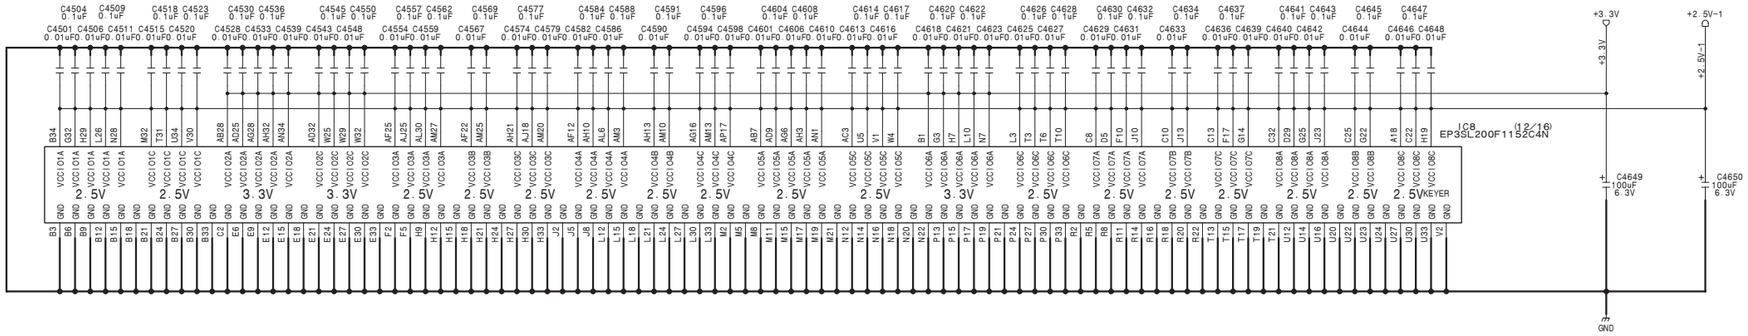

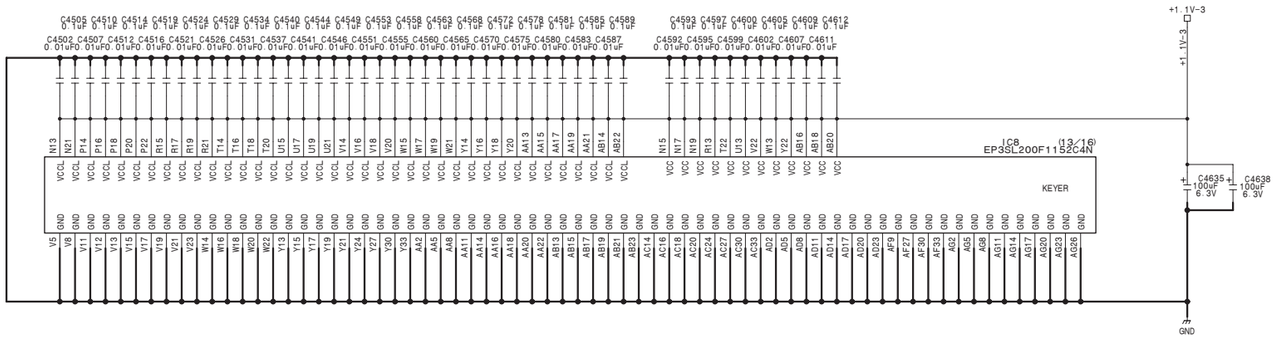
C4505 C4510 C4514 C4519 C4524 C4529 C4534 C4540 C4544 C4549 C4553 C4558 C4563 C4568 C4572 C4578 C4581 C4585 C4589
C4502 C4507 C4512 C4516 C4521 C4526 C4531 C4537 C4541 C4546 C4551 C4555 C4560 C4565 C4570 C4575 C4580 C4583 C4587
C4592 C4595 C4599 C4602 C4607 C4611
0.01uF0.01uF0.01uF0.01uF0.01uF

MIX-53 (45/48)

SUFFIX: -14

MIX-53 (45/48)

SUFFIX: -14

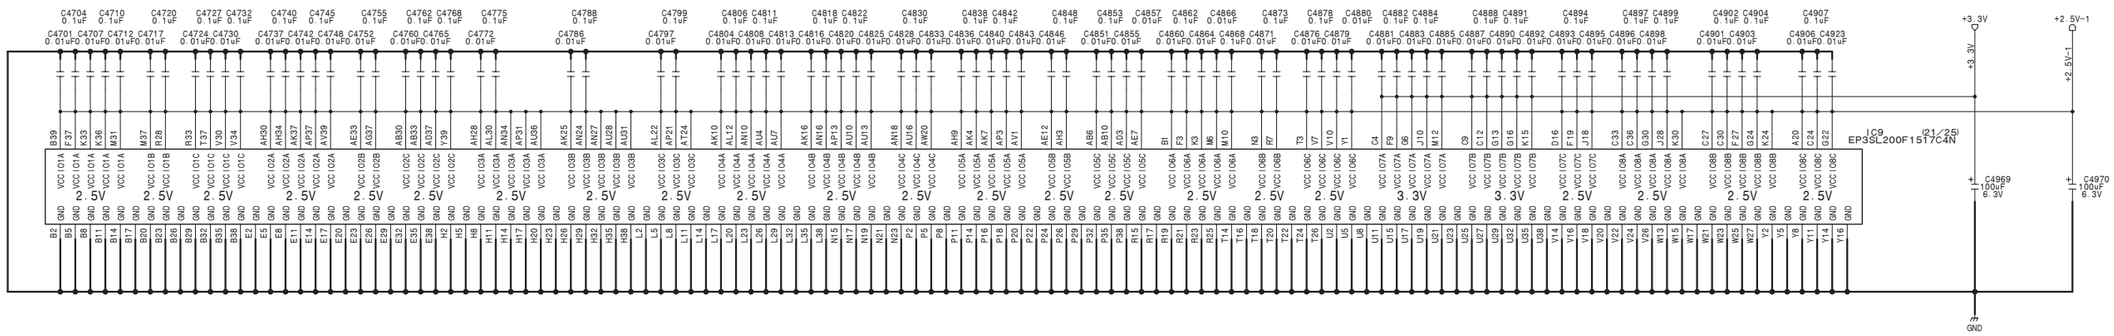

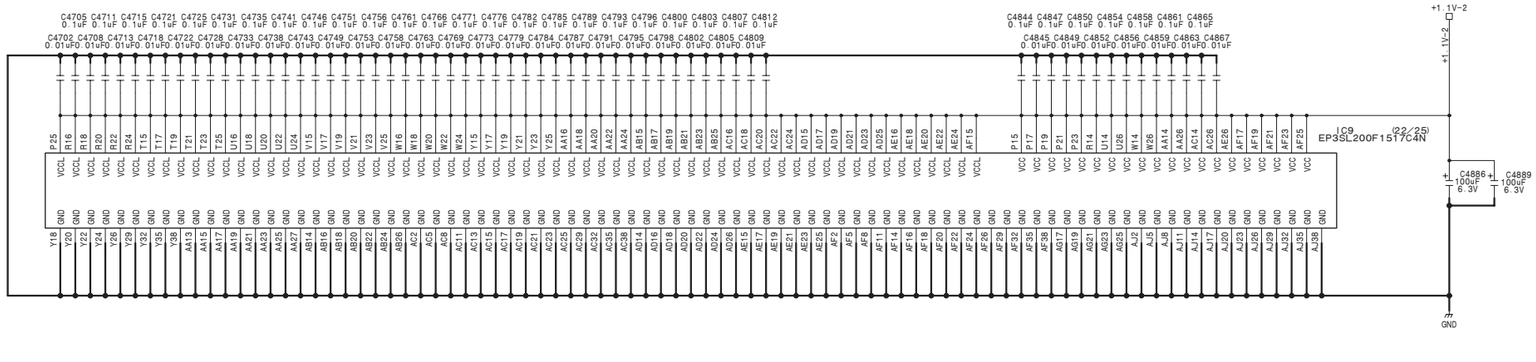

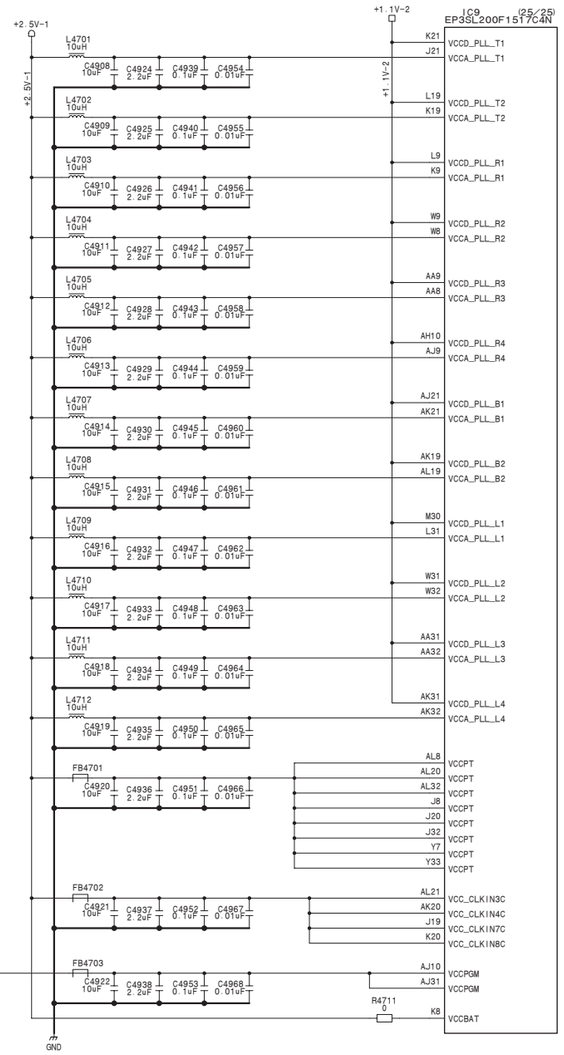

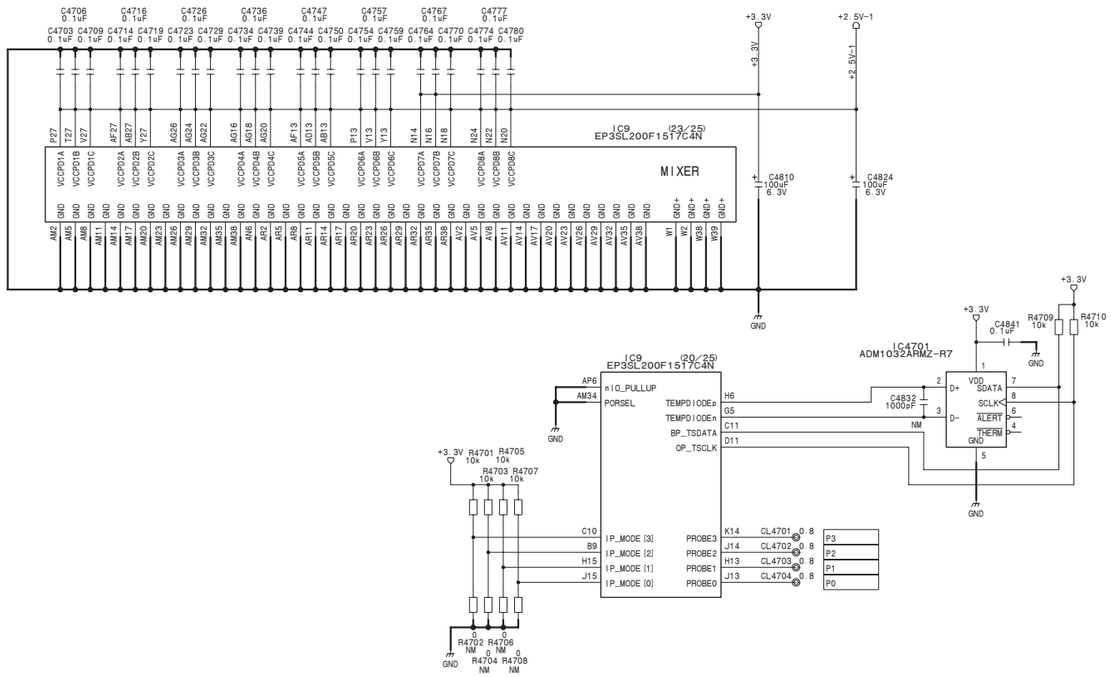

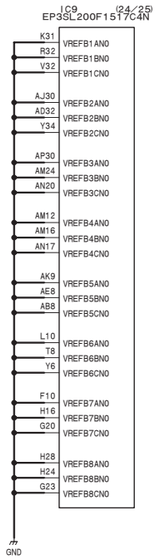

MIX-53 (45/48)

BOARD NO. 1-879-577-14

MVS-8000X_MIX-53_004_45

4-231 (a)

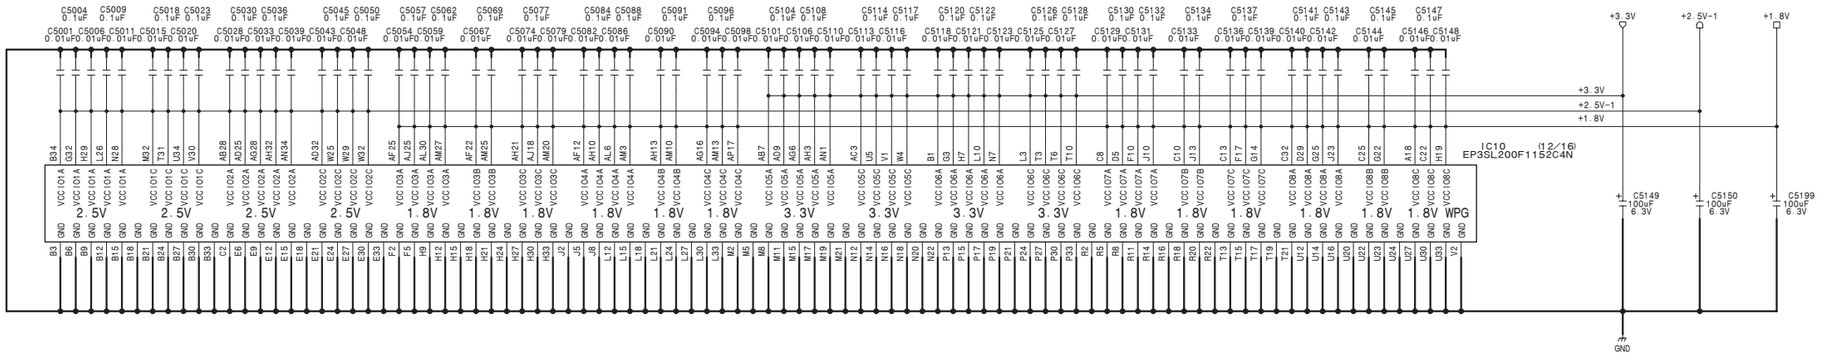

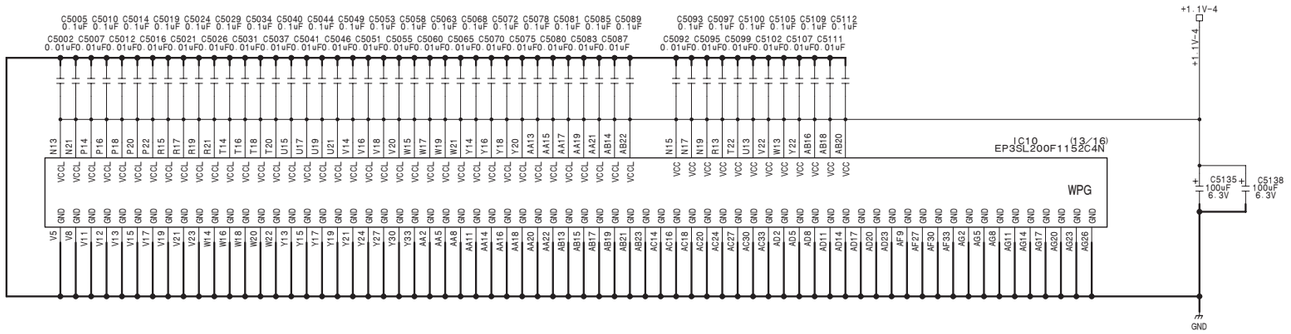

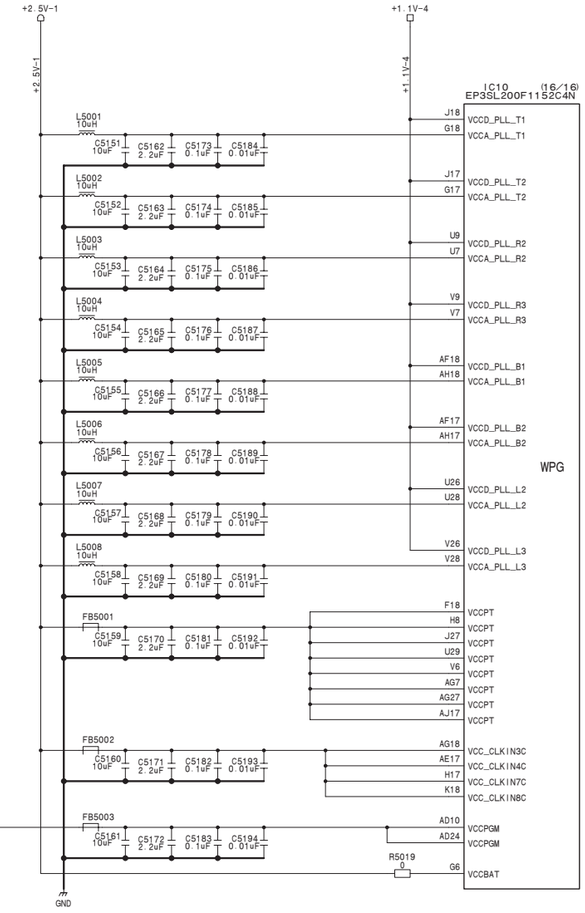

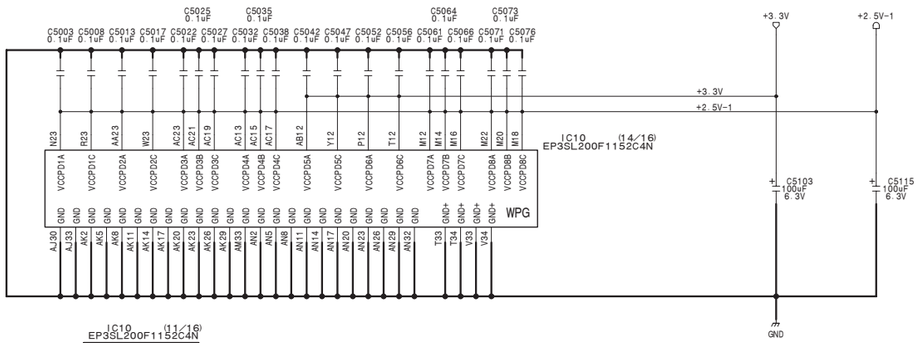

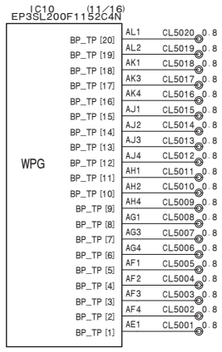

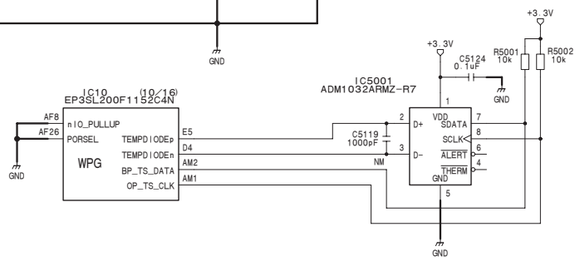

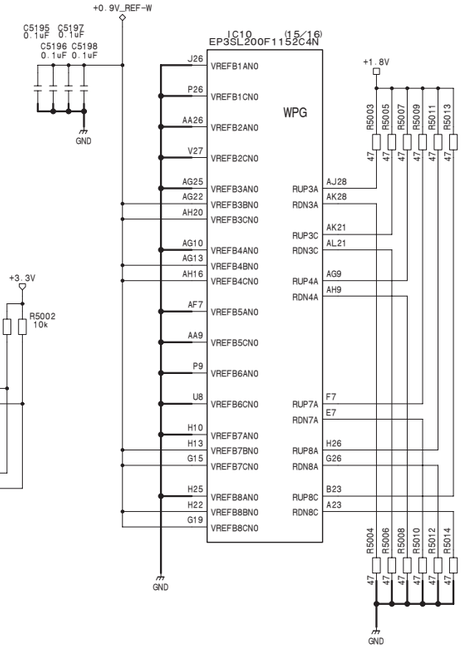

MIX-53 (46/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_46

MIX-53 (47/48)
SUFFIX: -14

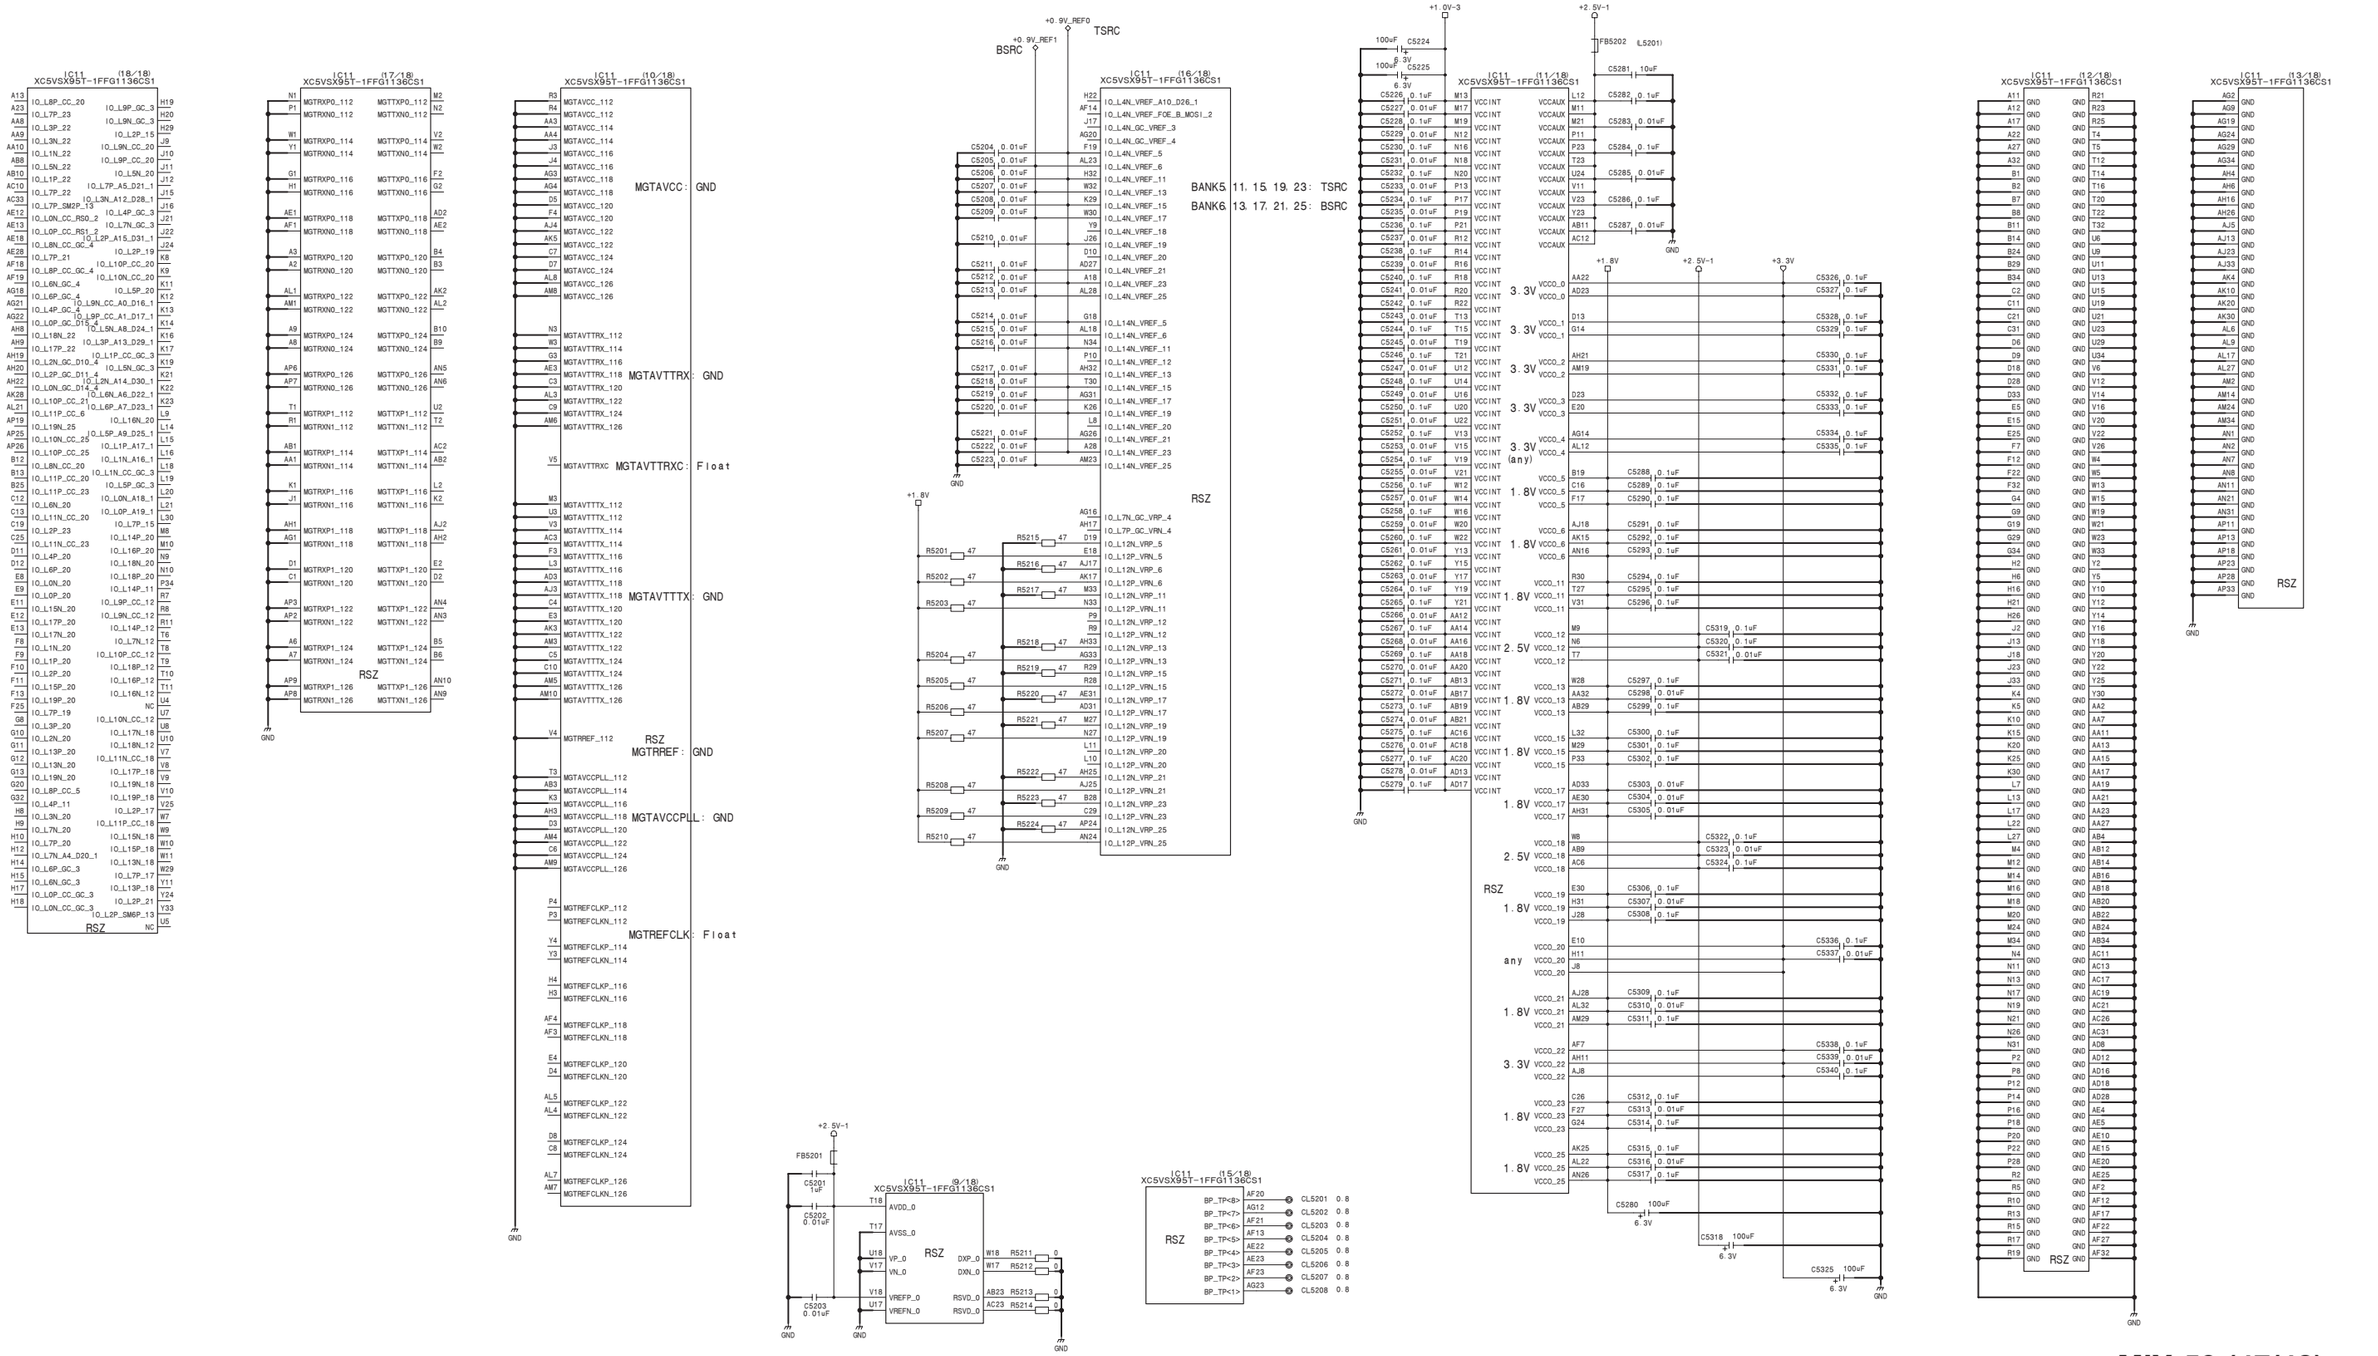

MVS-8000X/7000X

4-233 (a)

4-233 (a)

A	B	C	D	E	F	G	H

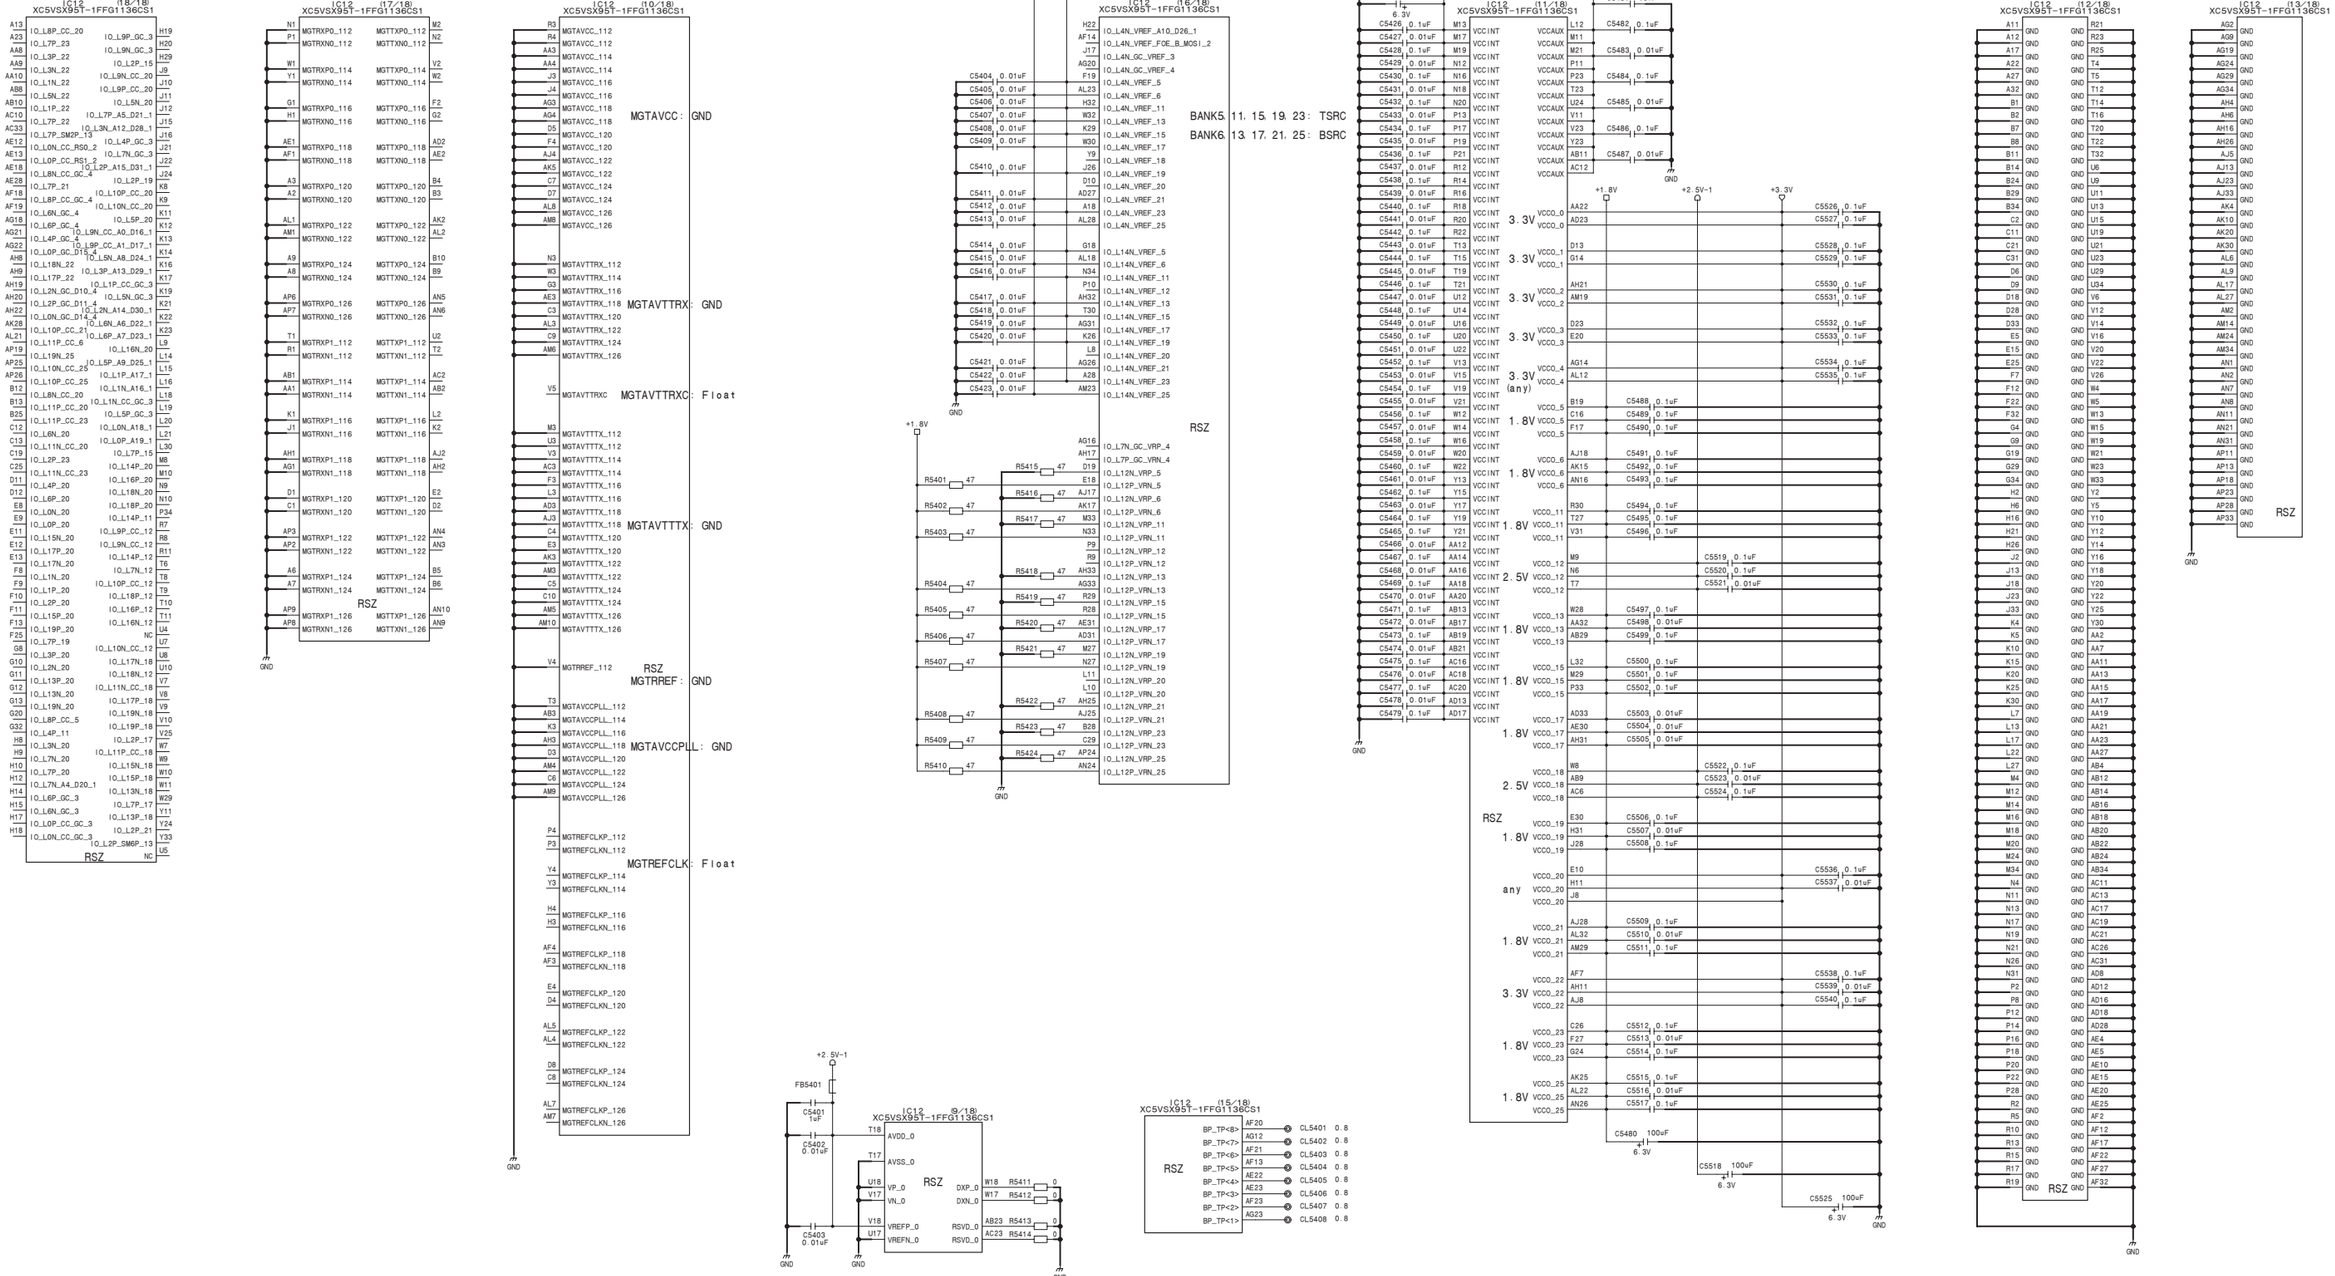

MIX-53 (48/48)
BOARD NO. 1-879-577-14
MVS-8000X_MIX-53_004_48

OUT-35 (1/45)
SUFFIX: -12

OUT-35 (1/45)
SUFFIX: -12

Leftmost

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET	DC_ENBL	GND	SD/HD	FUSE+12V	GND
6	GND (BD_EXT_SLF)	(for Rear)	GND	(SD/HD)	(SD/HD)	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9	VCLKp	VCLKn	GND	I2C_SCL	I2C_SDA	GND
10	FDp	FDn	GND	VDp	VDn	GND

CNC1

	A	B	BG	C	D	DG
1	ADRS1	ADRS2	GND	ADRS3	ADRS4	GND
2	ADRS5	ADRS6	GND	ADRS7	ADRS8	GND
3	ADRS9	ADRS10	GND	ADRS11	ADRS12	GND
4	ADRS13	ADRS14	GND	ADRS15	ADRS16	GND
5	DATA0	DATA1	GND	DATA2	DATA3	GND
6	DATA4	DATA5	GND	DATA6	DATA7	GND
7	DATA8	DATA9	GND	DATA10	DATA11	GND
8	DATA12	DATA13	GND	DATA14	DATA15	GND
9	CPU_CLKp	CPU_CLKn	GND	CPU_CSAn	CPU_CSBn	GND
10	CPU_WEn	CPU_WAITn	GND	CPU_OEn	CPU_RESETn (CPU_AUX)	GND

CND1

	A	B	BG	C	D	DG
1			GND	CCR_IN4BP	CCR_IN4BN	GND
2	CCR_OUT4P	CCR_OUT4N	GND	CCR_IN4AP	CCR_IN4AN	GND
3			GND	CCR_IN3BP	CCR_IN3BN	GND
4	CCR_OUT3P	CCR_OUT3N	GND	CCR_IN3AP	CCR_IN3AN	GND
5			GND	CCR_IN2BP	CCR_IN2BN	GND
6	CCR_OUT2P	CCR_OUT2N	GND	CCR_IN2AP	CCR_IN2AN	GND
7			GND	CCR_IN1BP	CCR_IN1BN	GND
8	CCR_OUT1P	CCR_OUT1N	GND	CCR_IN1AP	CCR_IN1AN	GND
9			GND			GND
10			GND			GND

CNE1

	A	B	BG	C	D	DG
1	OUT24BP	OUT24BN	GND	OUT24_INBP	OUT24_INBN	GND
2	OUT24AP	OUT24AN	GND	OUT24_INAP	OUT24_INAN	GND
3			GND			GND
4	OUT23BP	OUT23BN	GND	OUT23_INBP	OUT23_INBN	GND
5	OUT23AP	OUT23AN	GND	OUT23_INAP	OUT23_INAN	GND
6	(OUT22BP)	(OUT22BN)	GND	OUT22_INBP	OUT22_INBN	GND
7	OUT22AP	OUT22AN	GND	OUT22_INAP	OUT22_INAN	GND
8			GND			GND
9	(OUT21BP)	(OUT21BN)	GND	OUT21_INBP	OUT21_INBN	GND
10	OUT21AP	OUT21AN	GND	OUT21_INAP	OUT21_INAN	GND

CNG1

	A	B	BG	C	D	DG
1	(OUT20BP)	(OUT20BN)	GND	OUT20_INBP	OUT20_INBN	GND
2	OUT20AP	OUT20AN	GND	OUT20_INAP	OUT20_INAN	GND
3	(OUT19BP)	(OUT19BN)	GND	OUT19_INBP	OUT19_INBN	GND
4	OUT19AP	OUT19AN	GND	OUT19_INAP	OUT19_INAN	GND
5	(OUT18BP)	(OUT18BN)	GND	OUT18_INBP	OUT18_INBN	GND
6	OUT18AP	OUT18AN	GND	OUT18_INAP	OUT18_INAN	GND
7	(OUT17BP)	(OUT17BN)	GND	OUT17_INBP	OUT17_INBN	GND
8	OUT17AP	OUT17AN	GND	OUT17_INAP	OUT17_INAN	GND
9	MSD_OUT1BP	MSD_OUT1BN	GND			GND
10	MSD_OUT1AP	MSD_OUT1AN	GND			GND

CNK1

	A	B	BG	C	D	DG
1	(OUT16BP)	(OUT16BN)	GND	OUT16_INBP	OUT16_INBN	GND
2	OUT16AP	OUT16AN	GND	OUT16_INAP	OUT16_INAN	GND
3			GND			GND
4	(OUT15BP)	(OUT15BN)	GND	OUT15_INBP	OUT15_INBN	GND
5	OUT15AP	OUT15AN	GND	OUT15_INAP	OUT15_INAN	GND
6	(OUT14BP)	(OUT14BN)	GND	OUT14_INBP	OUT14_INBN	GND
7	OUT14AP	OUT14AN	GND	OUT14_INAP	OUT14_INAN	GND
8			GND			GND
9	(OUT13BP)	(OUT13BN)	GND	OUT13_INBP	OUT13_INBN	GND
10	OUT13AP	OUT13AN	GND	OUT13_INAP	OUT13_INAN	GND

CNL1

	A	B	BG	C	D	DG
1	(OUT12BP)	(OUT12BN)	GND	OUT12_INBP	OUT12_INBN	GND
2	OUT12AP	OUT12AN	GND	OUT12_INAP	OUT12_INAN	GND
3			GND			GND
4	(OUT11BP)	(OUT11BN)	GND	OUT11_INBP	OUT11_INBN	GND
5	OUT11AP	OUT11AN	GND	OUT11_INAP	OUT11_INAN	GND
6	(OUT10BP)	(OUT10BN)	GND	OUT10_INBP	OUT10_INBN	GND
7	OUT10AP	OUT10AN	GND	OUT10_INAP	OUT10_INAN	GND
8			GND			GND
9	(OUT09BP)	(OUT09BN)	GND	OUT09_INBP	OUT09_INBN	GND
10	OUT09AP	OUT09AN	GND	OUT09_INAP	OUT09_INAN	GND

CNN1

	A	B	BG	C	D	DG
1	(OUT08BP)	(OUT08BN)	GND	OUT08_INBP	OUT08_INBN	GND
2	OUT08AP	OUT08AN	GND	OUT08_INAP	OUT08_INAN	GND
3			GND			GND
4	(OUT07BP)	(OUT07BN)	GND	OUT07_INBP	OUT07_INBN	GND
5	OUT07AP	OUT07AN	GND	OUT07_INAP	OUT07_INAN	GND
6	(OUT06BP)	(OUT06BN)	GND	OUT06_INBP	OUT06_INBN	GND
7	OUT06AP	OUT06AN	GND	OUT06_INAP	OUT06_INAN	GND
8			GND			GND
9	(OUT05BP)	(OUT05BN)	GND	OUT05_INBP	OUT05_INBN	GND
10	OUT05AP	OUT05AN	GND	OUT05_INAP	OUT05_INAN	GND

CNP1

	A	B	BG	C	D	DG
1	(OUT04BP)	(OUT04BN)	GND	OUT04_INBP	OUT04_INBN	GND
2	OUT04AP	OUT04AN	GND	OUT04_INAP	OUT04_INAN	GND
3	(OUT03BP)	(OUT03BN)	GND	OUT03_INBP	OUT03_INBN	GND
4	OUT03AP	OUT03AN	GND	OUT03_INAP	OUT03_INAN	GND
5	(OUT02BP)	(OUT02BN)	GND	OUT02_INBP	OUT02_INBN	GND
6	OUT02AP	OUT02AN	GND	OUT02_INAP	OUT02_INAN	GND
7	(OUT01BP)	(OUT01BN)	GND	OUT01_INBP	OUT01_INBN	GND
8	OUT01AP	OUT01AN	GND	OUT01_INAP	OUT01_INAN	GND
9	FC_OUT2P	FC_OUT2N	GND			GND
10	FC_OUT1P	FC_OUT1N	GND			GND

Rightmost

OUT-35 (1/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_1

OUT-35 (2/45)
SUFFIX: -12

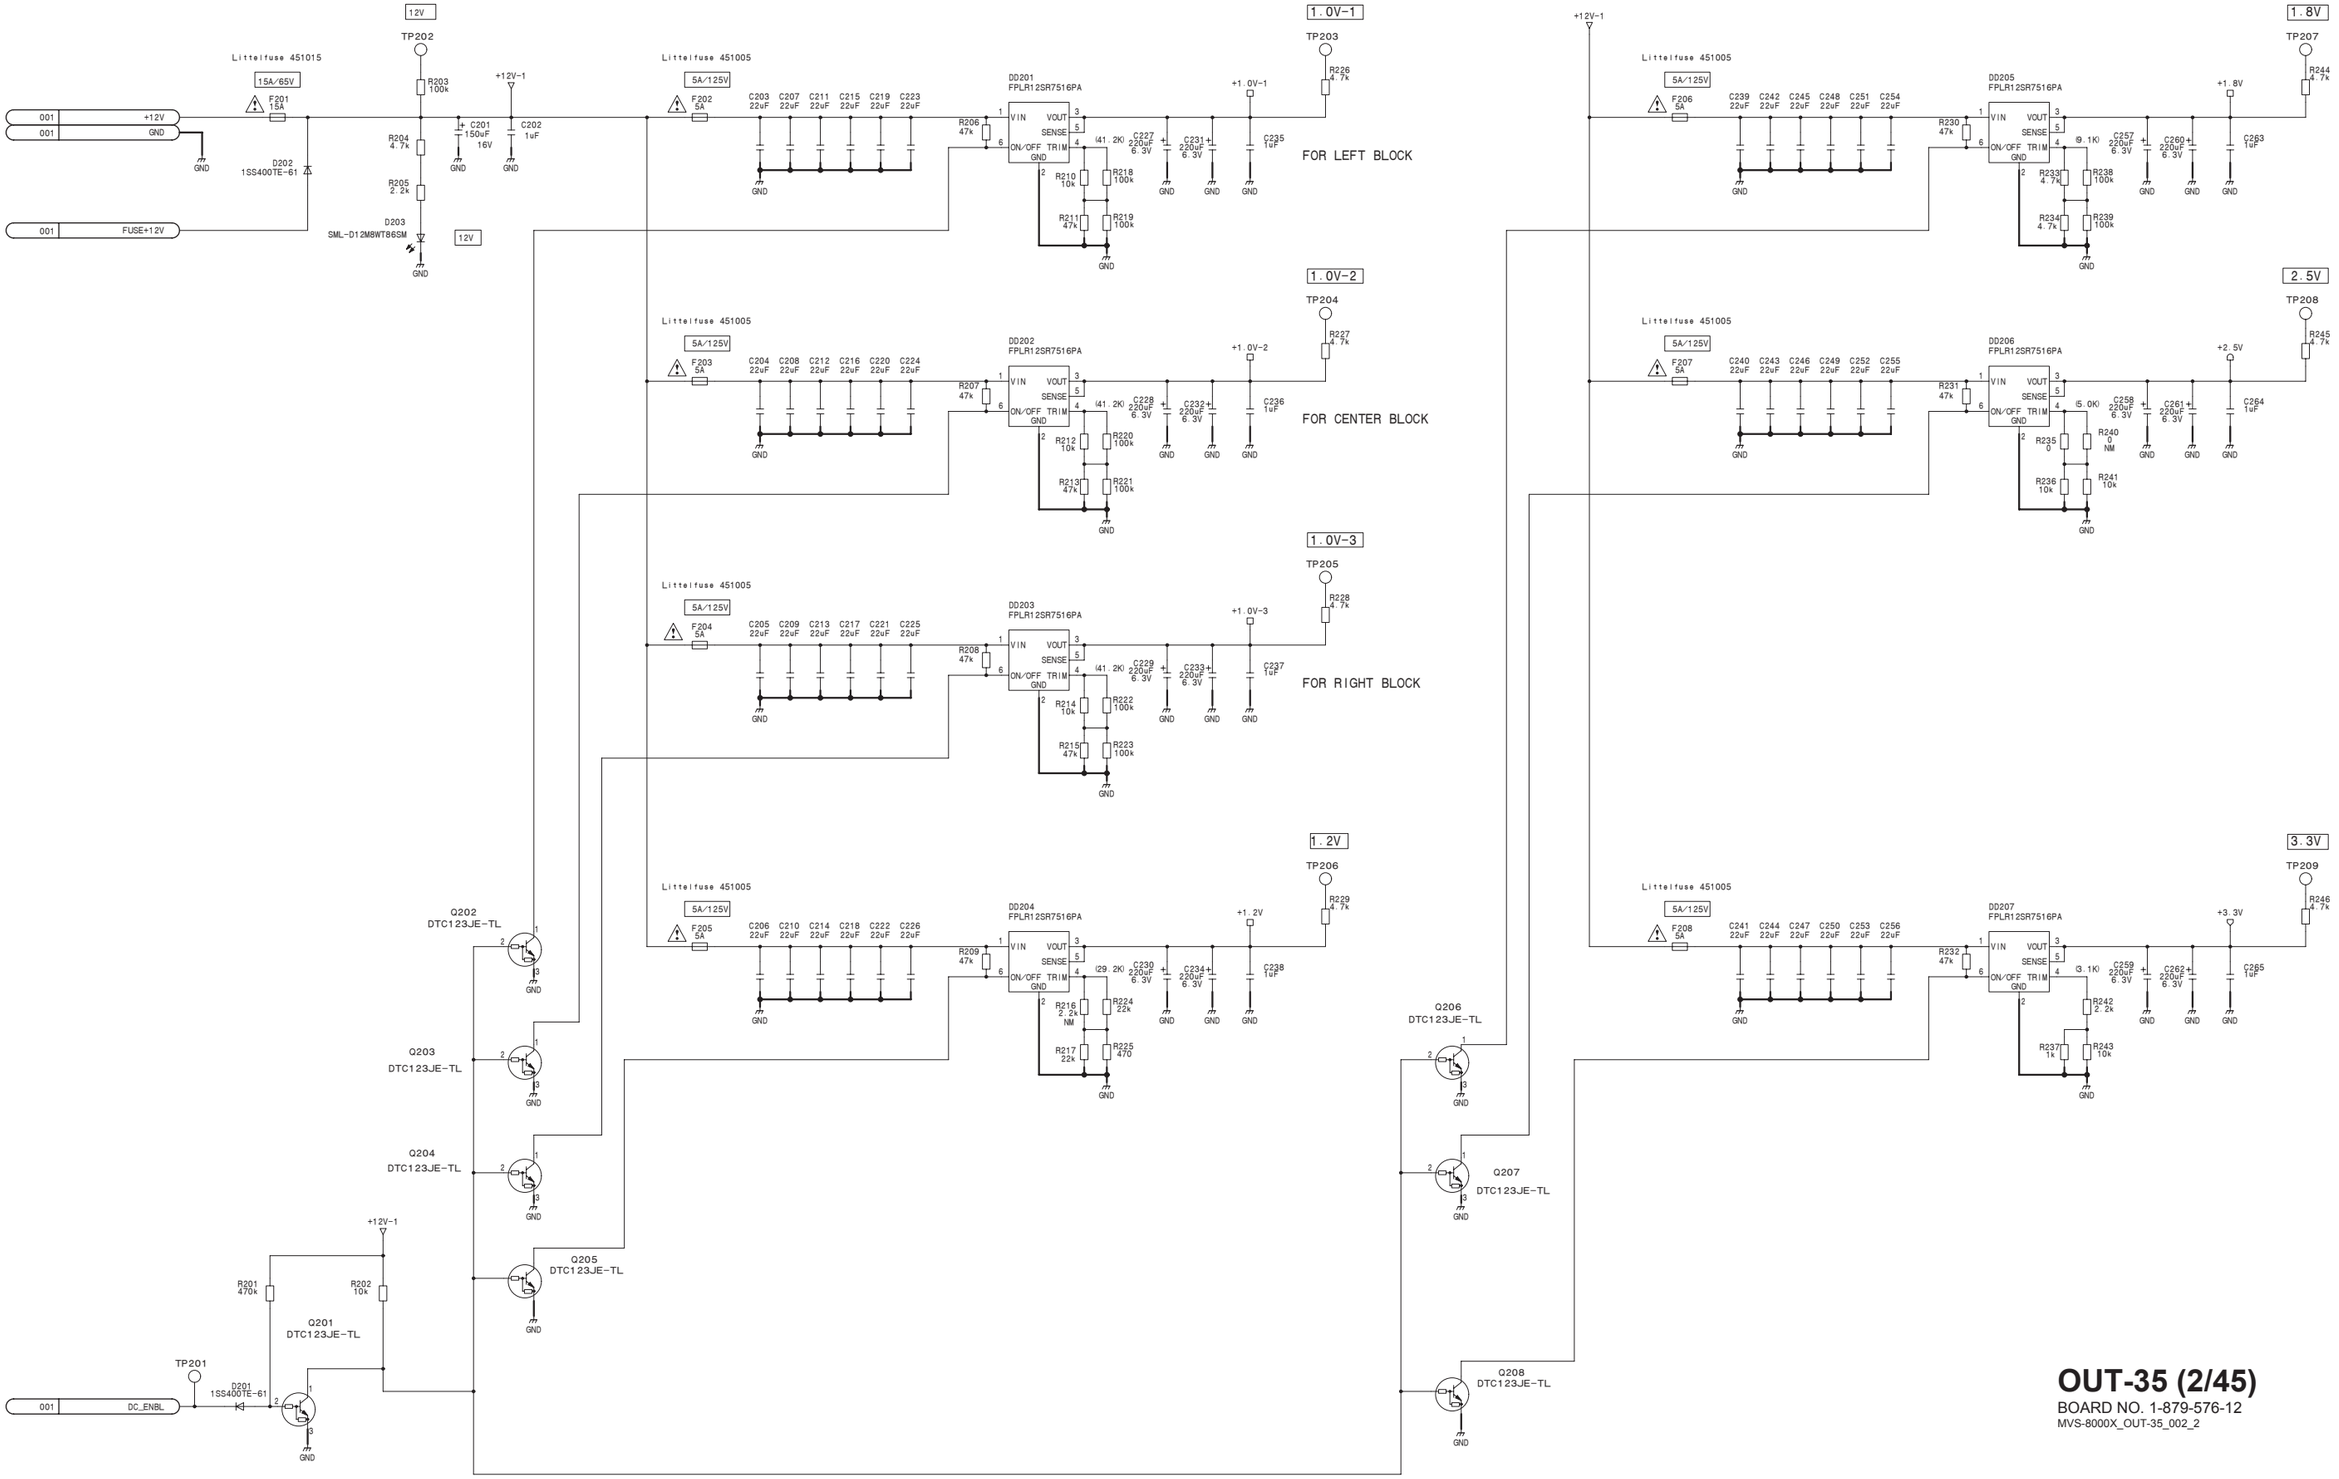

OUT-35 (2/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_2

OUT-35 (3/45)

SUFFIX: -12

OUT-35 (3/45)

SUFFIX: -12

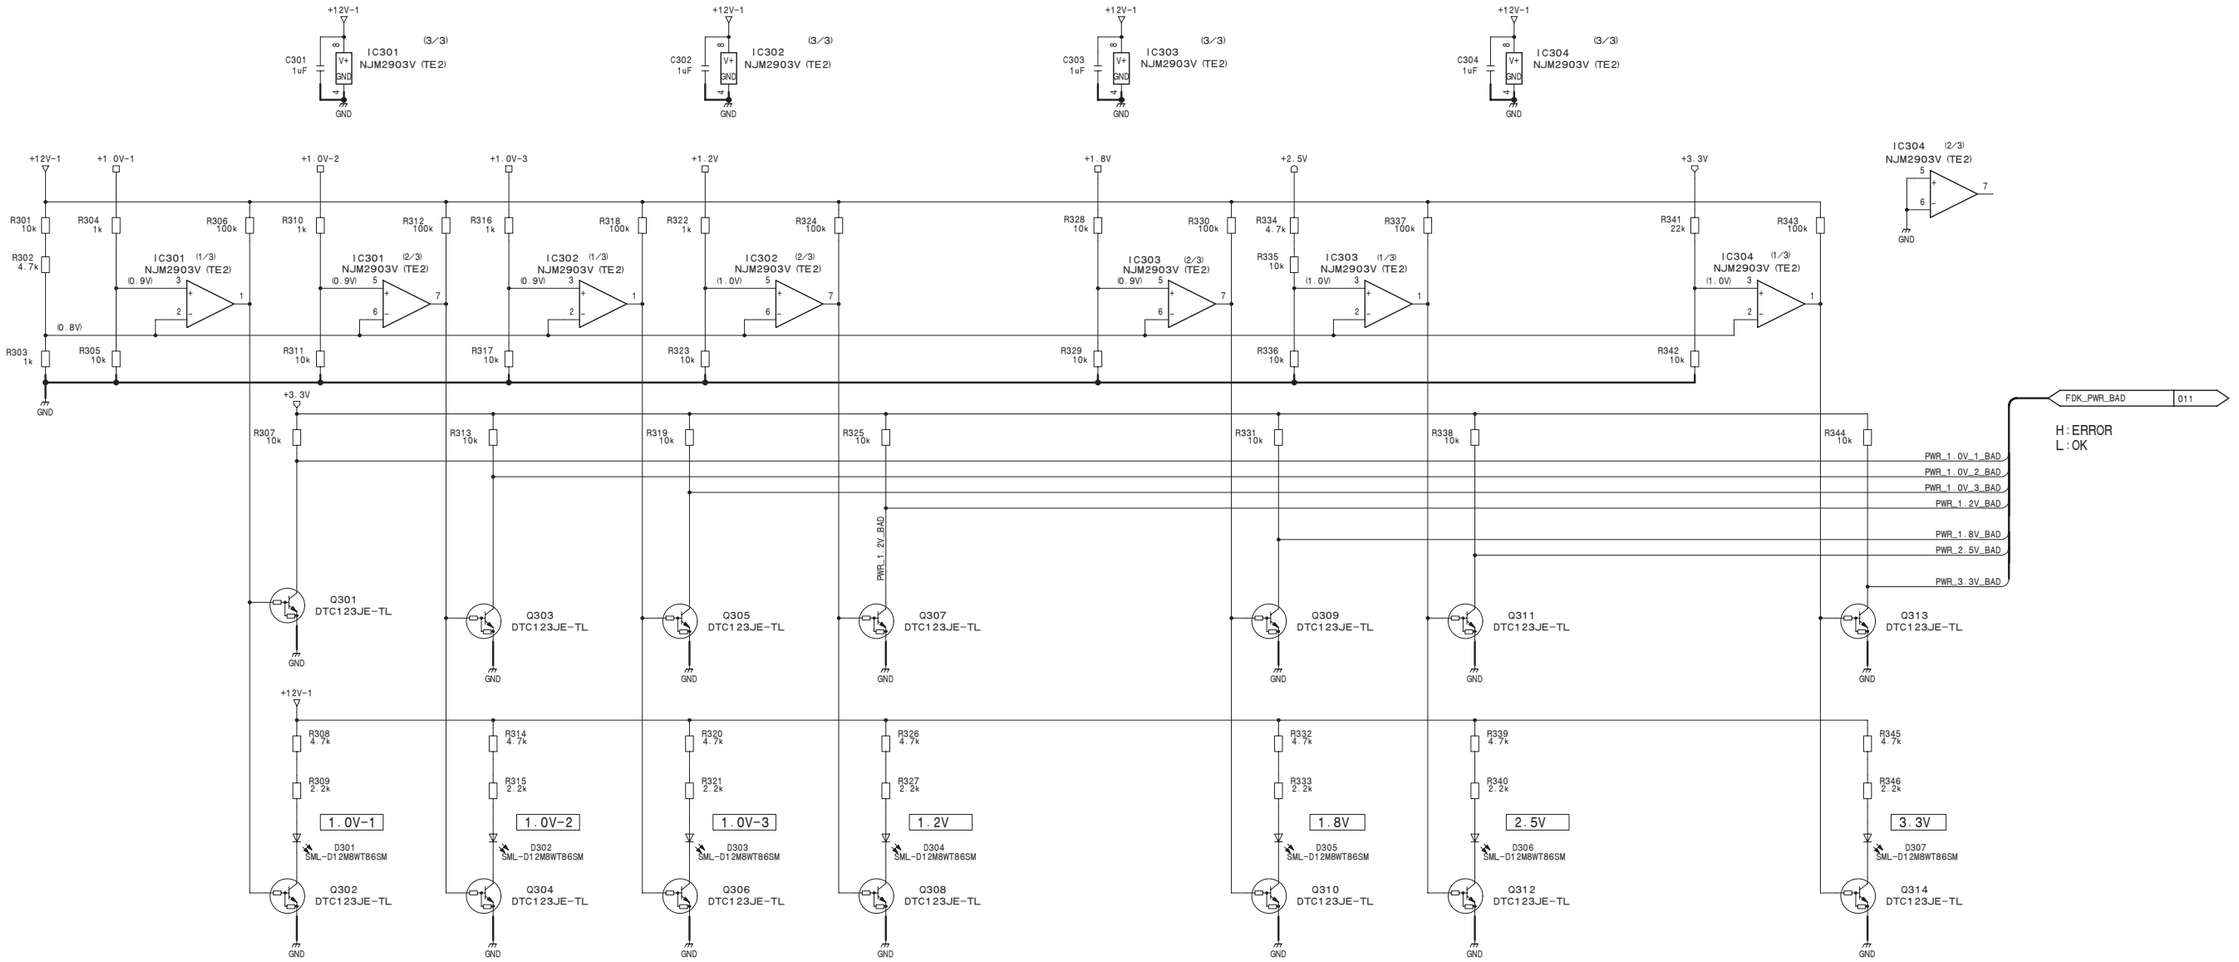

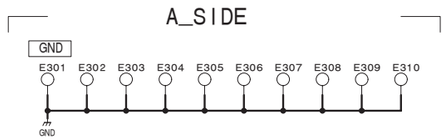

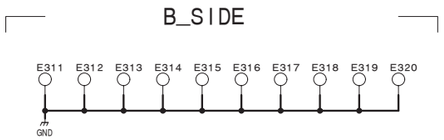

OUT-35 (3/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_3

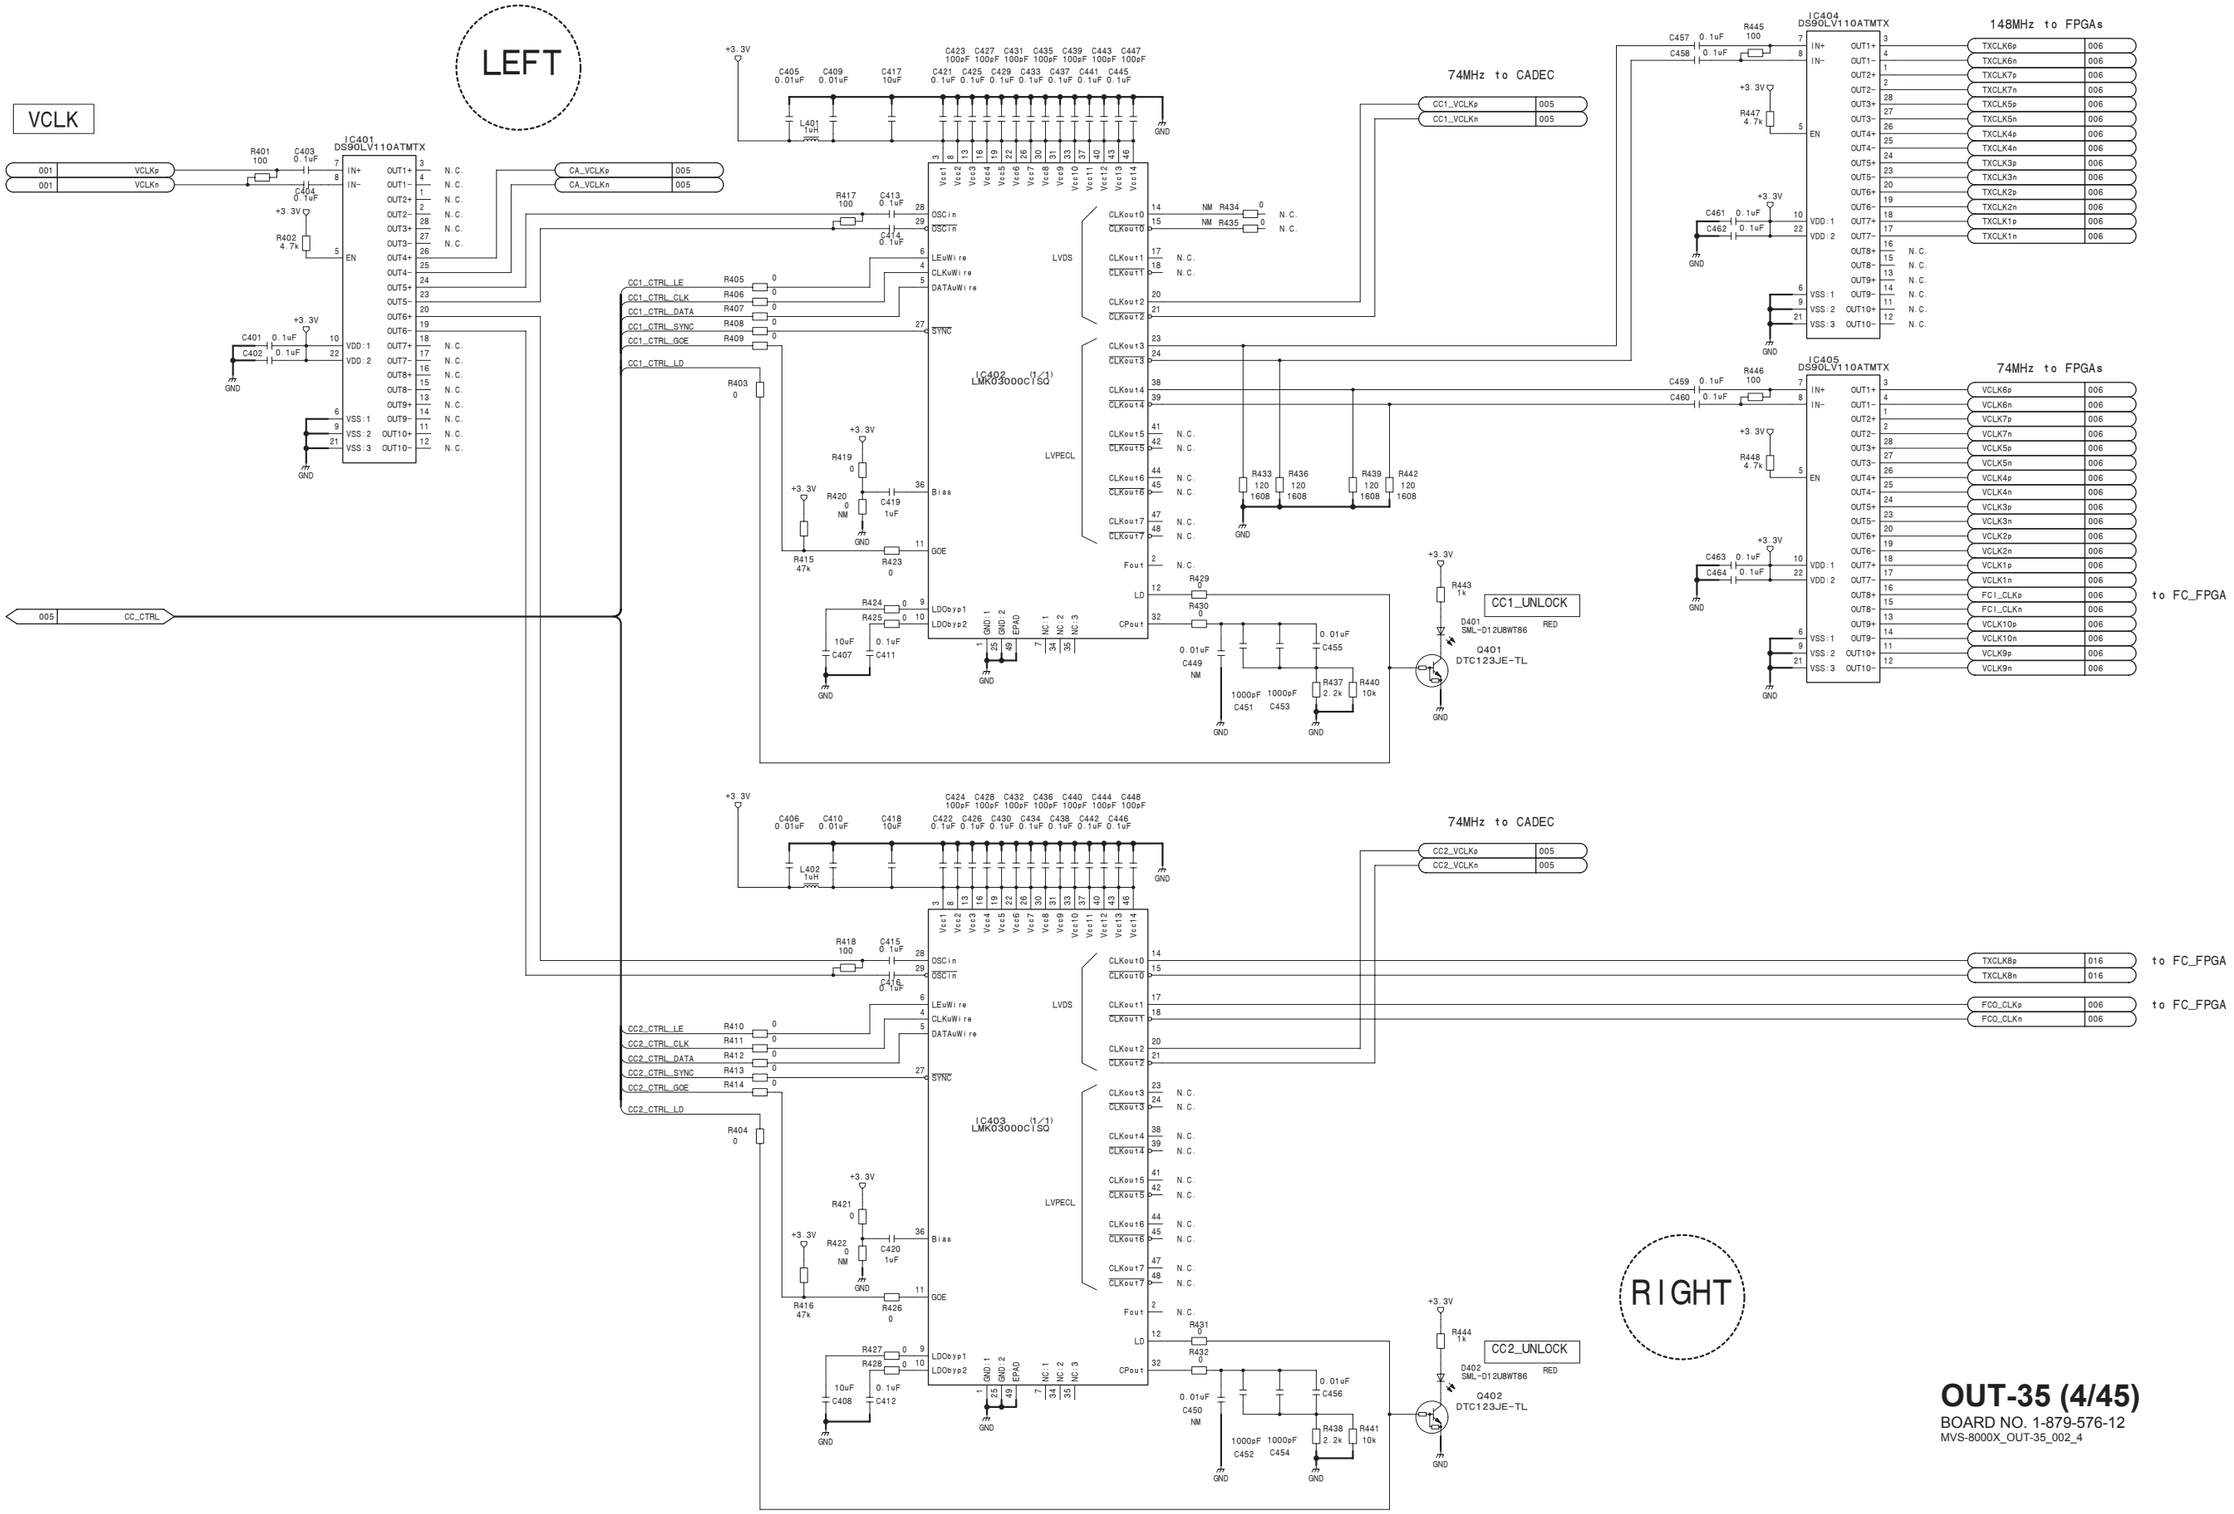

OUT-35 (4/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_4

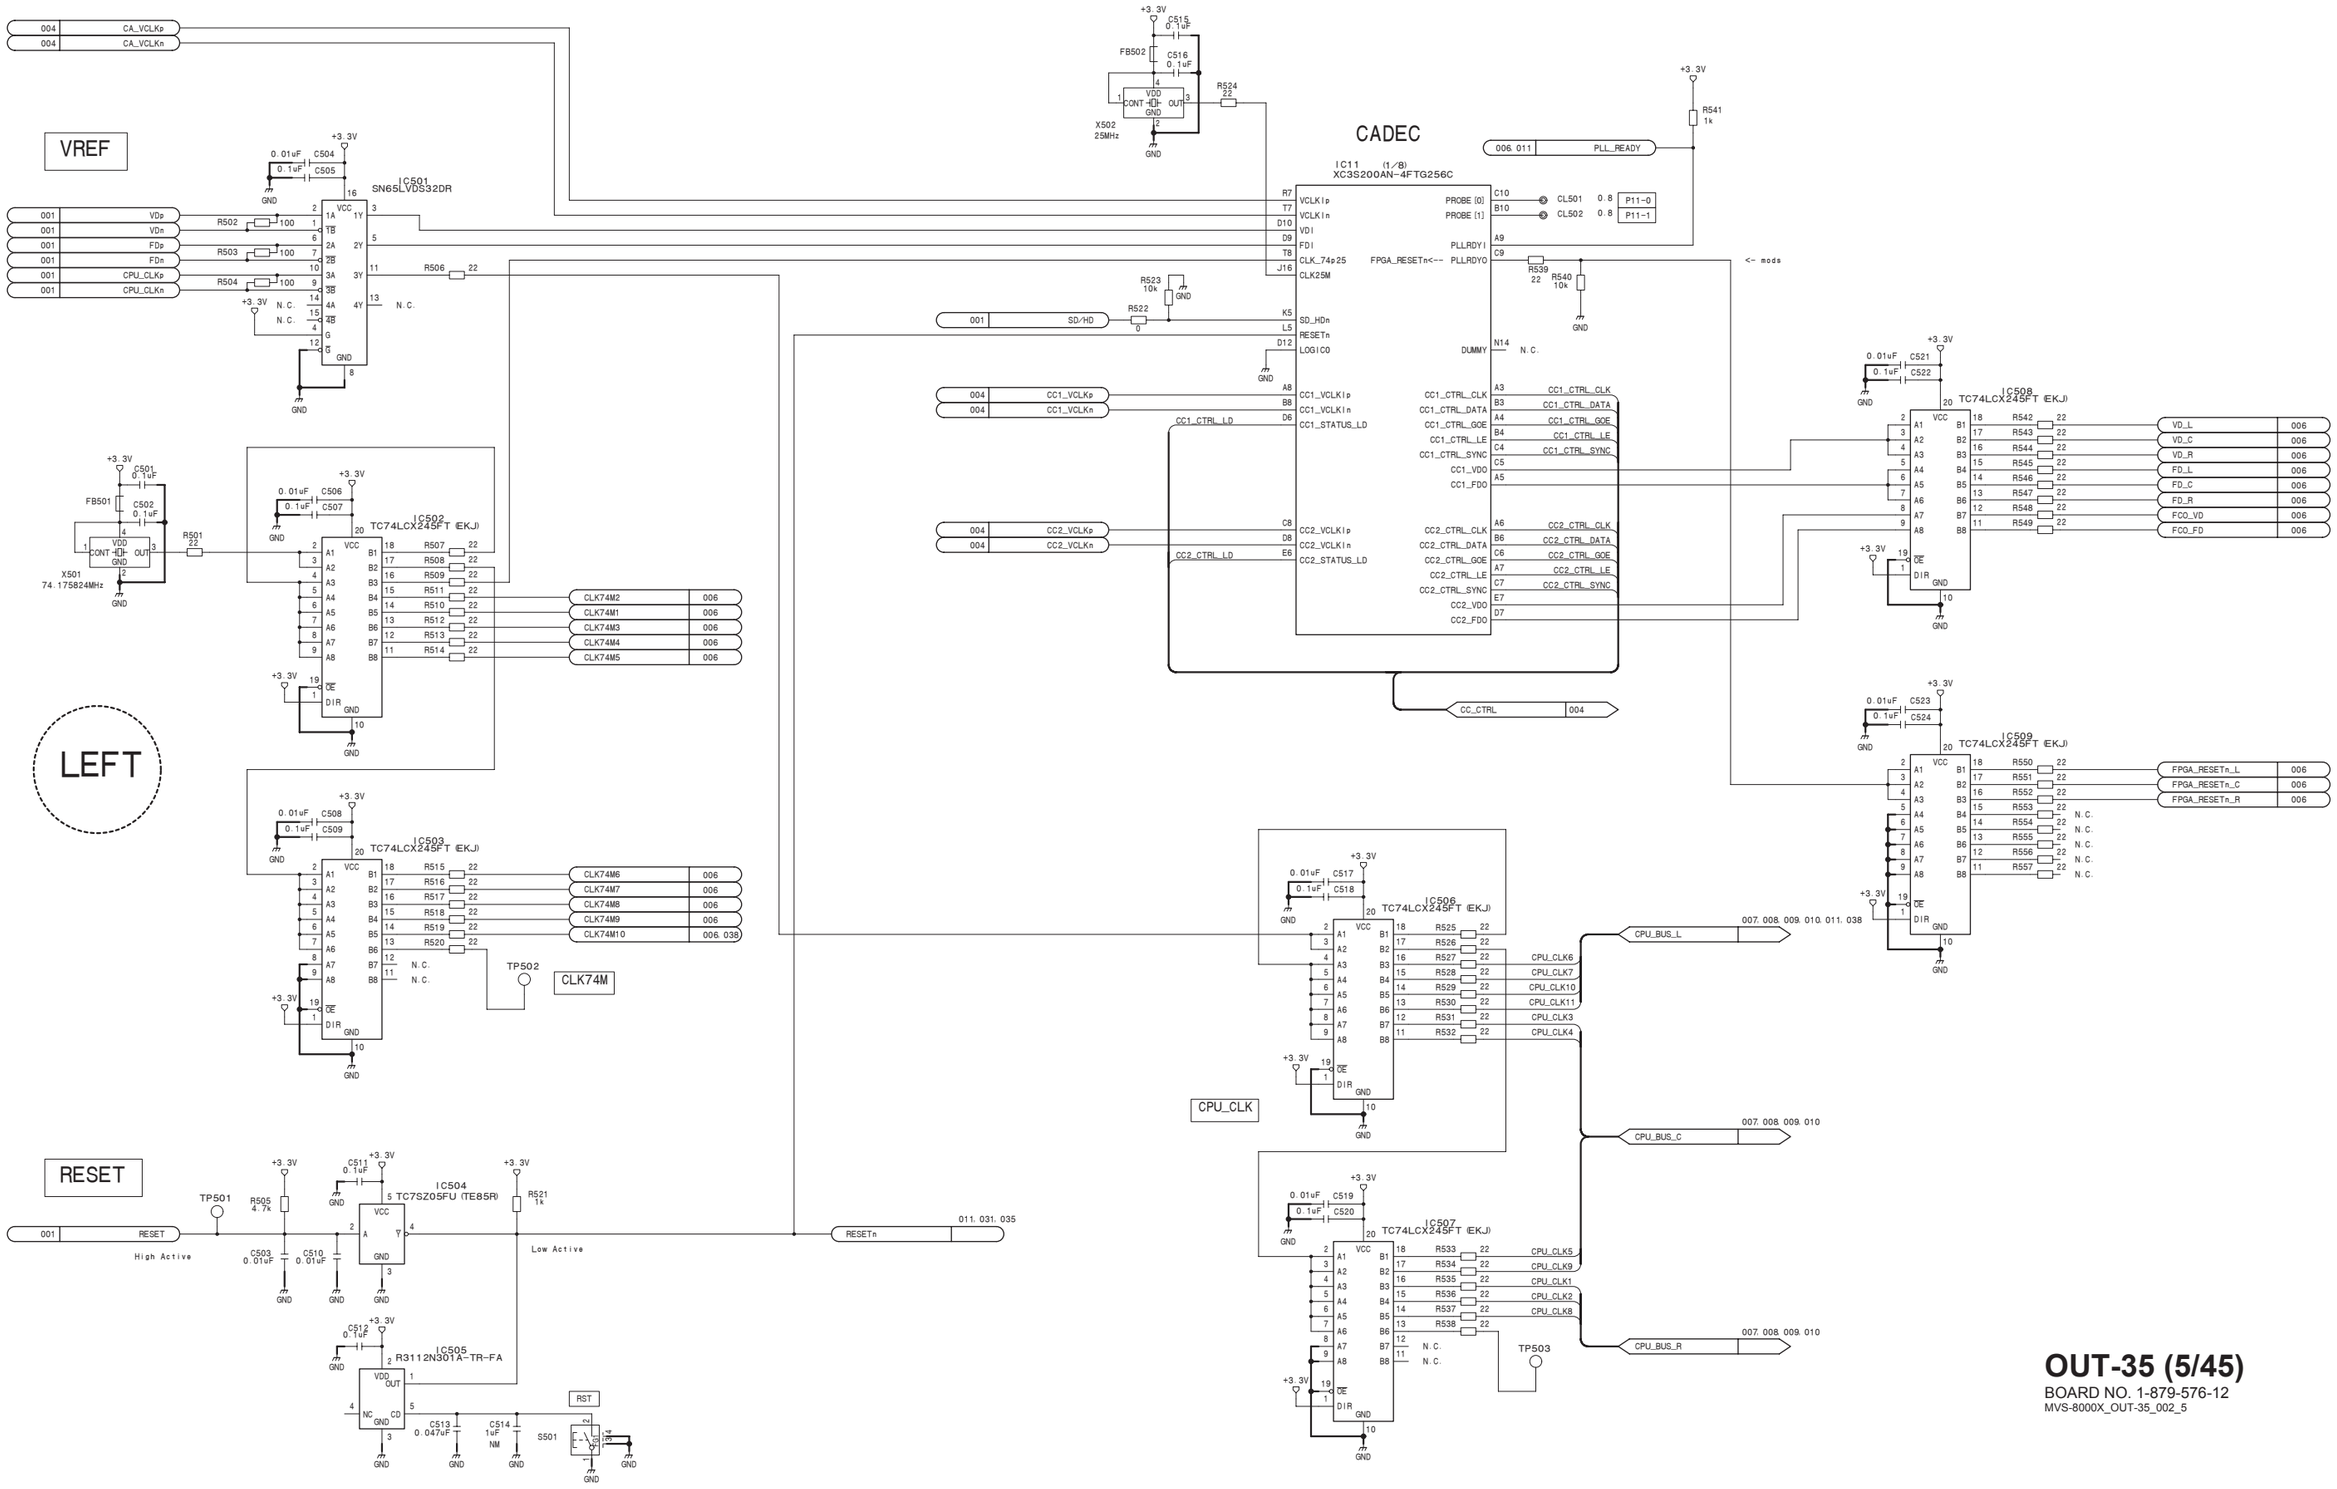

OUT-35 (5/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_5

OUT-35 (6/45)
SUFFIX: -12

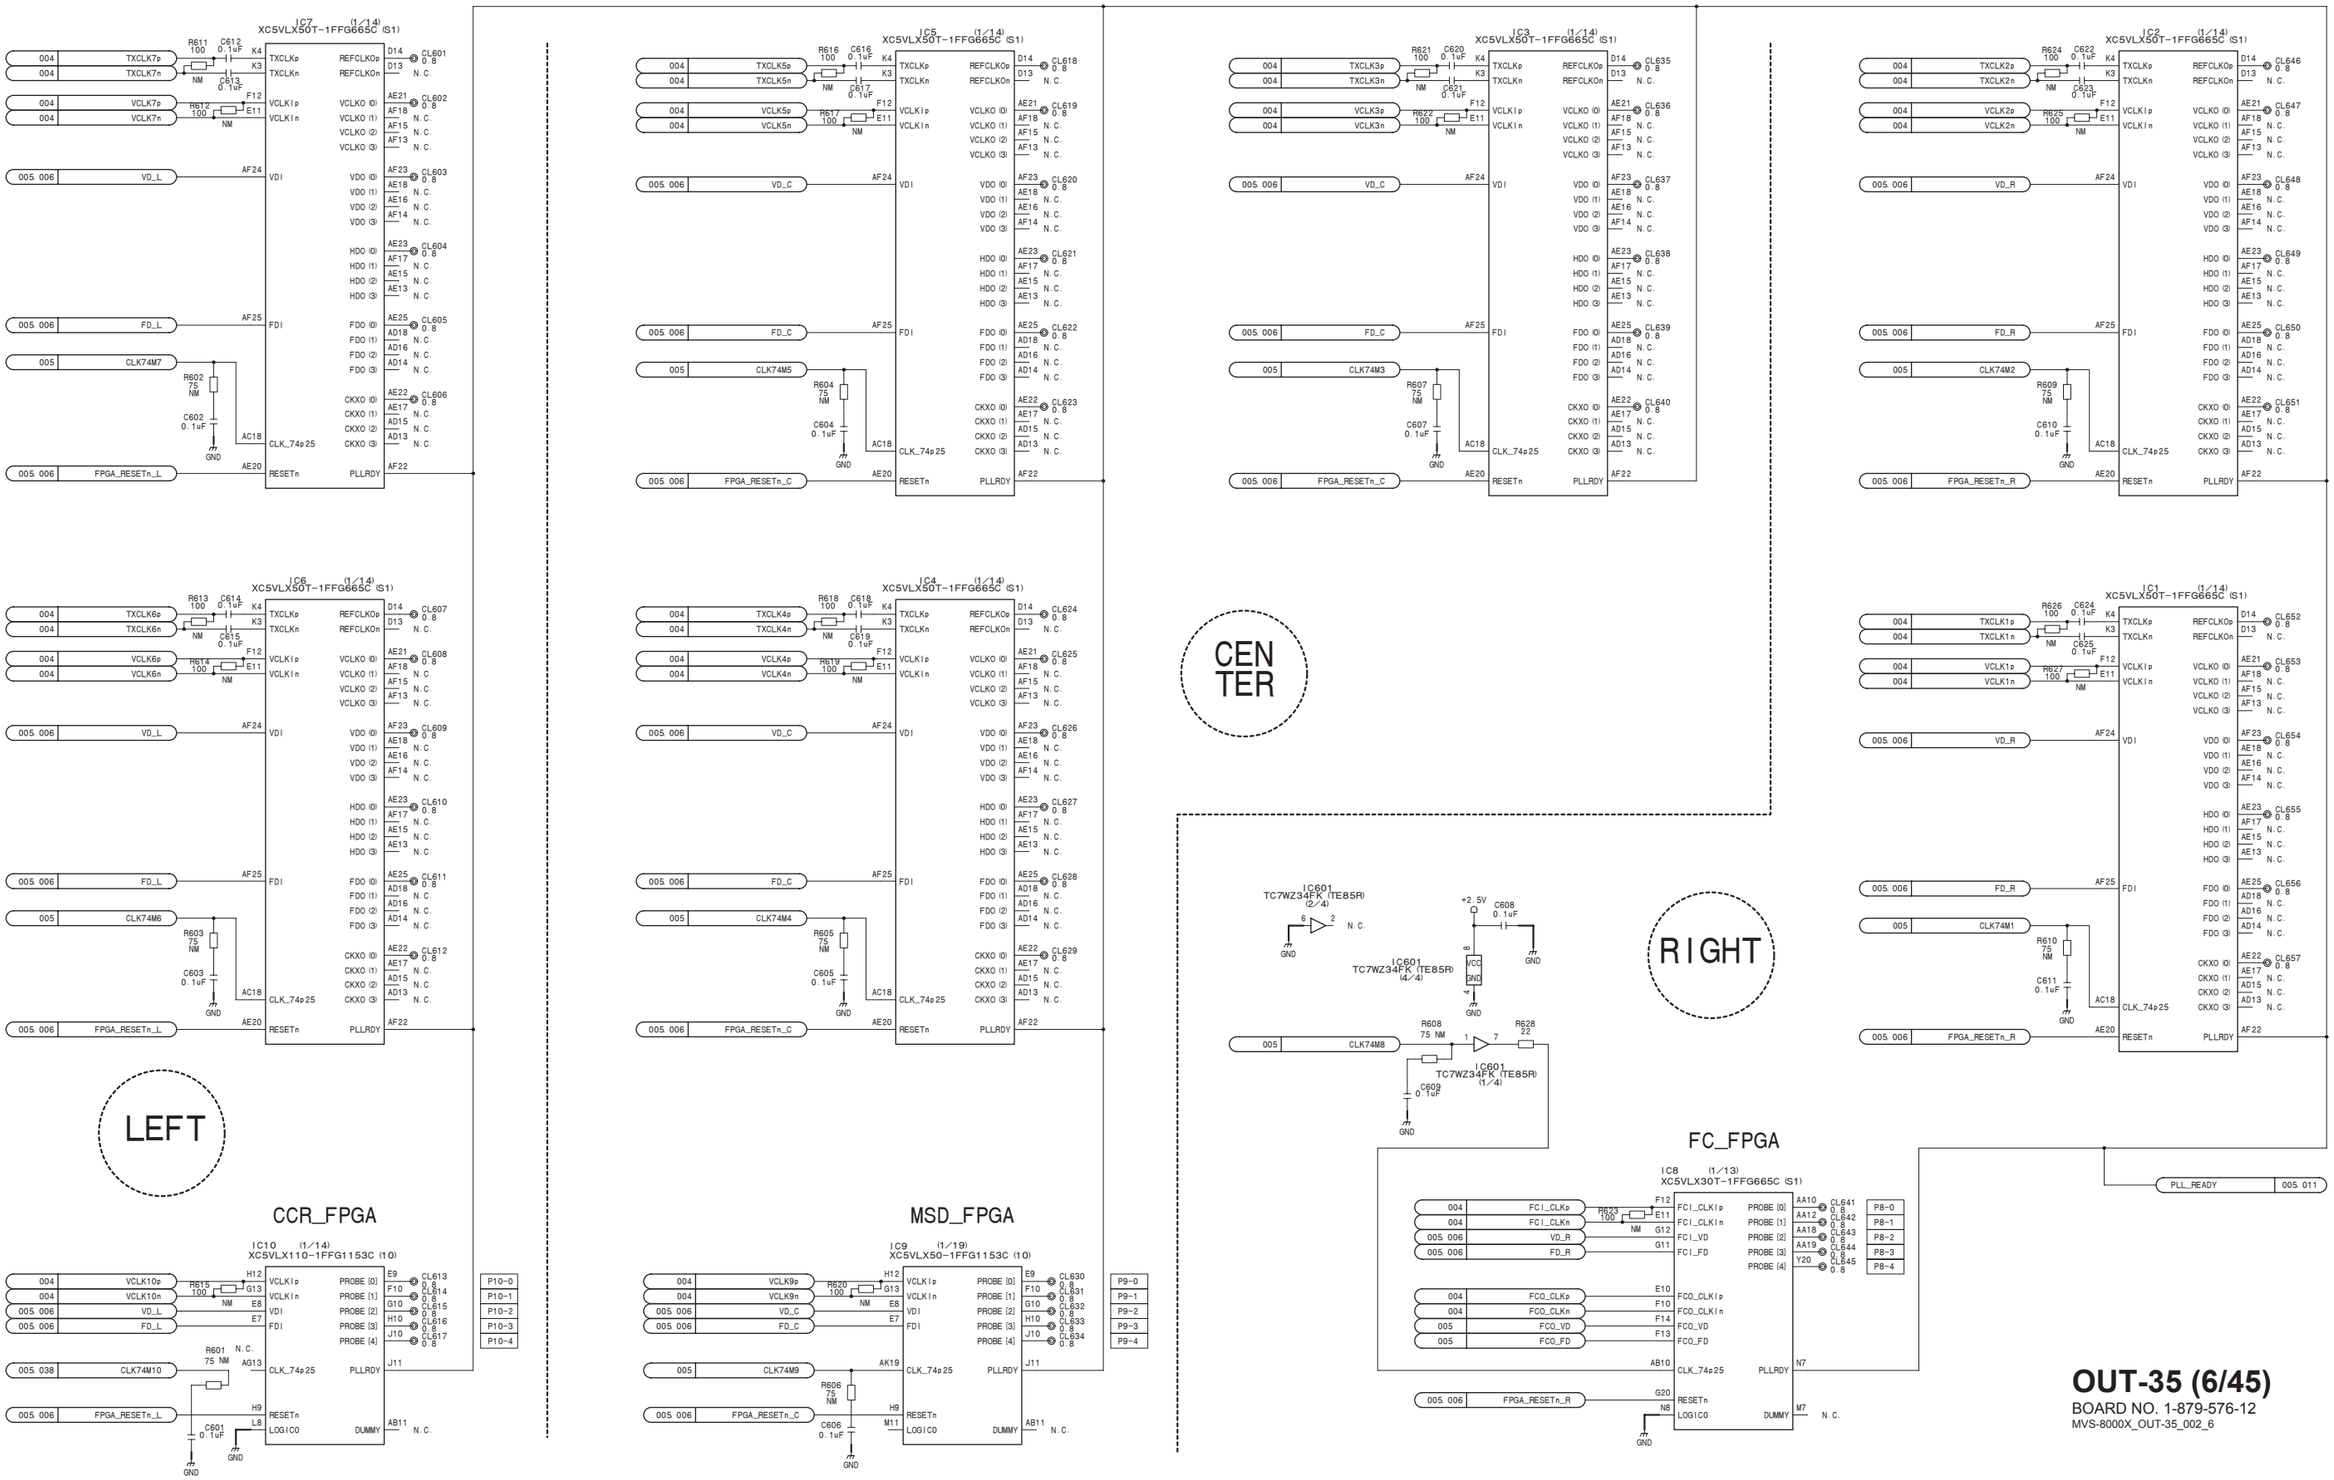

OUT-35 (7/45)
SUFFIX: -12

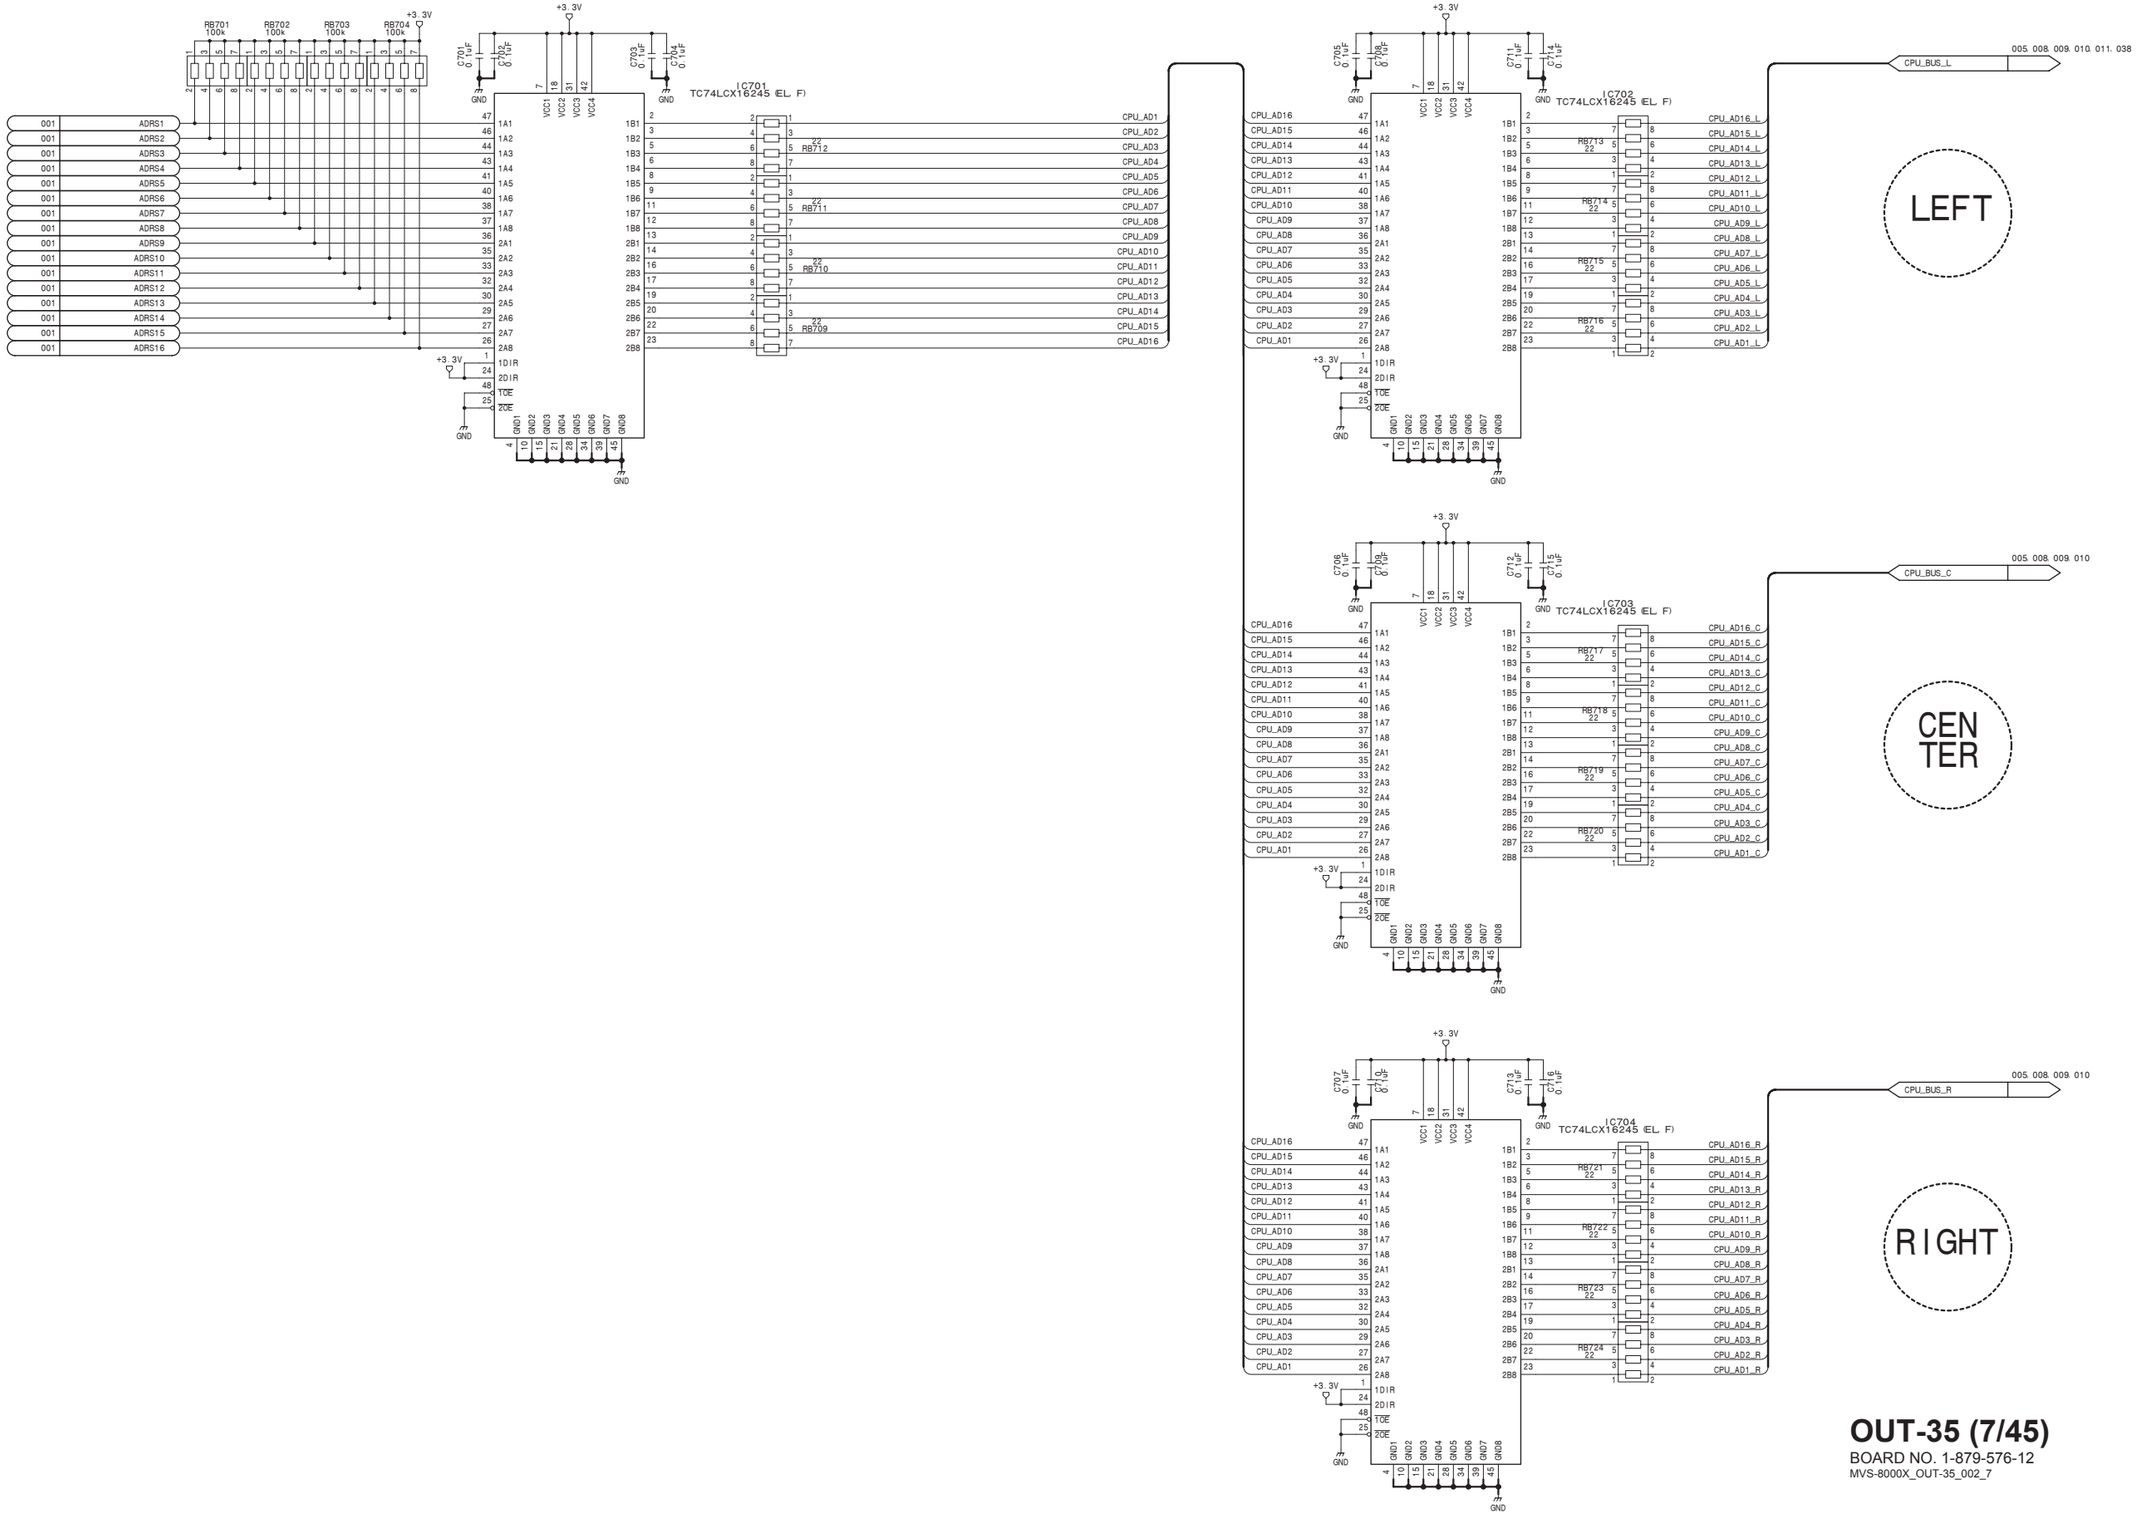

OUT-35 (7/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_7

4-241

OUT-35 (8/45)
SUFFIX: -12

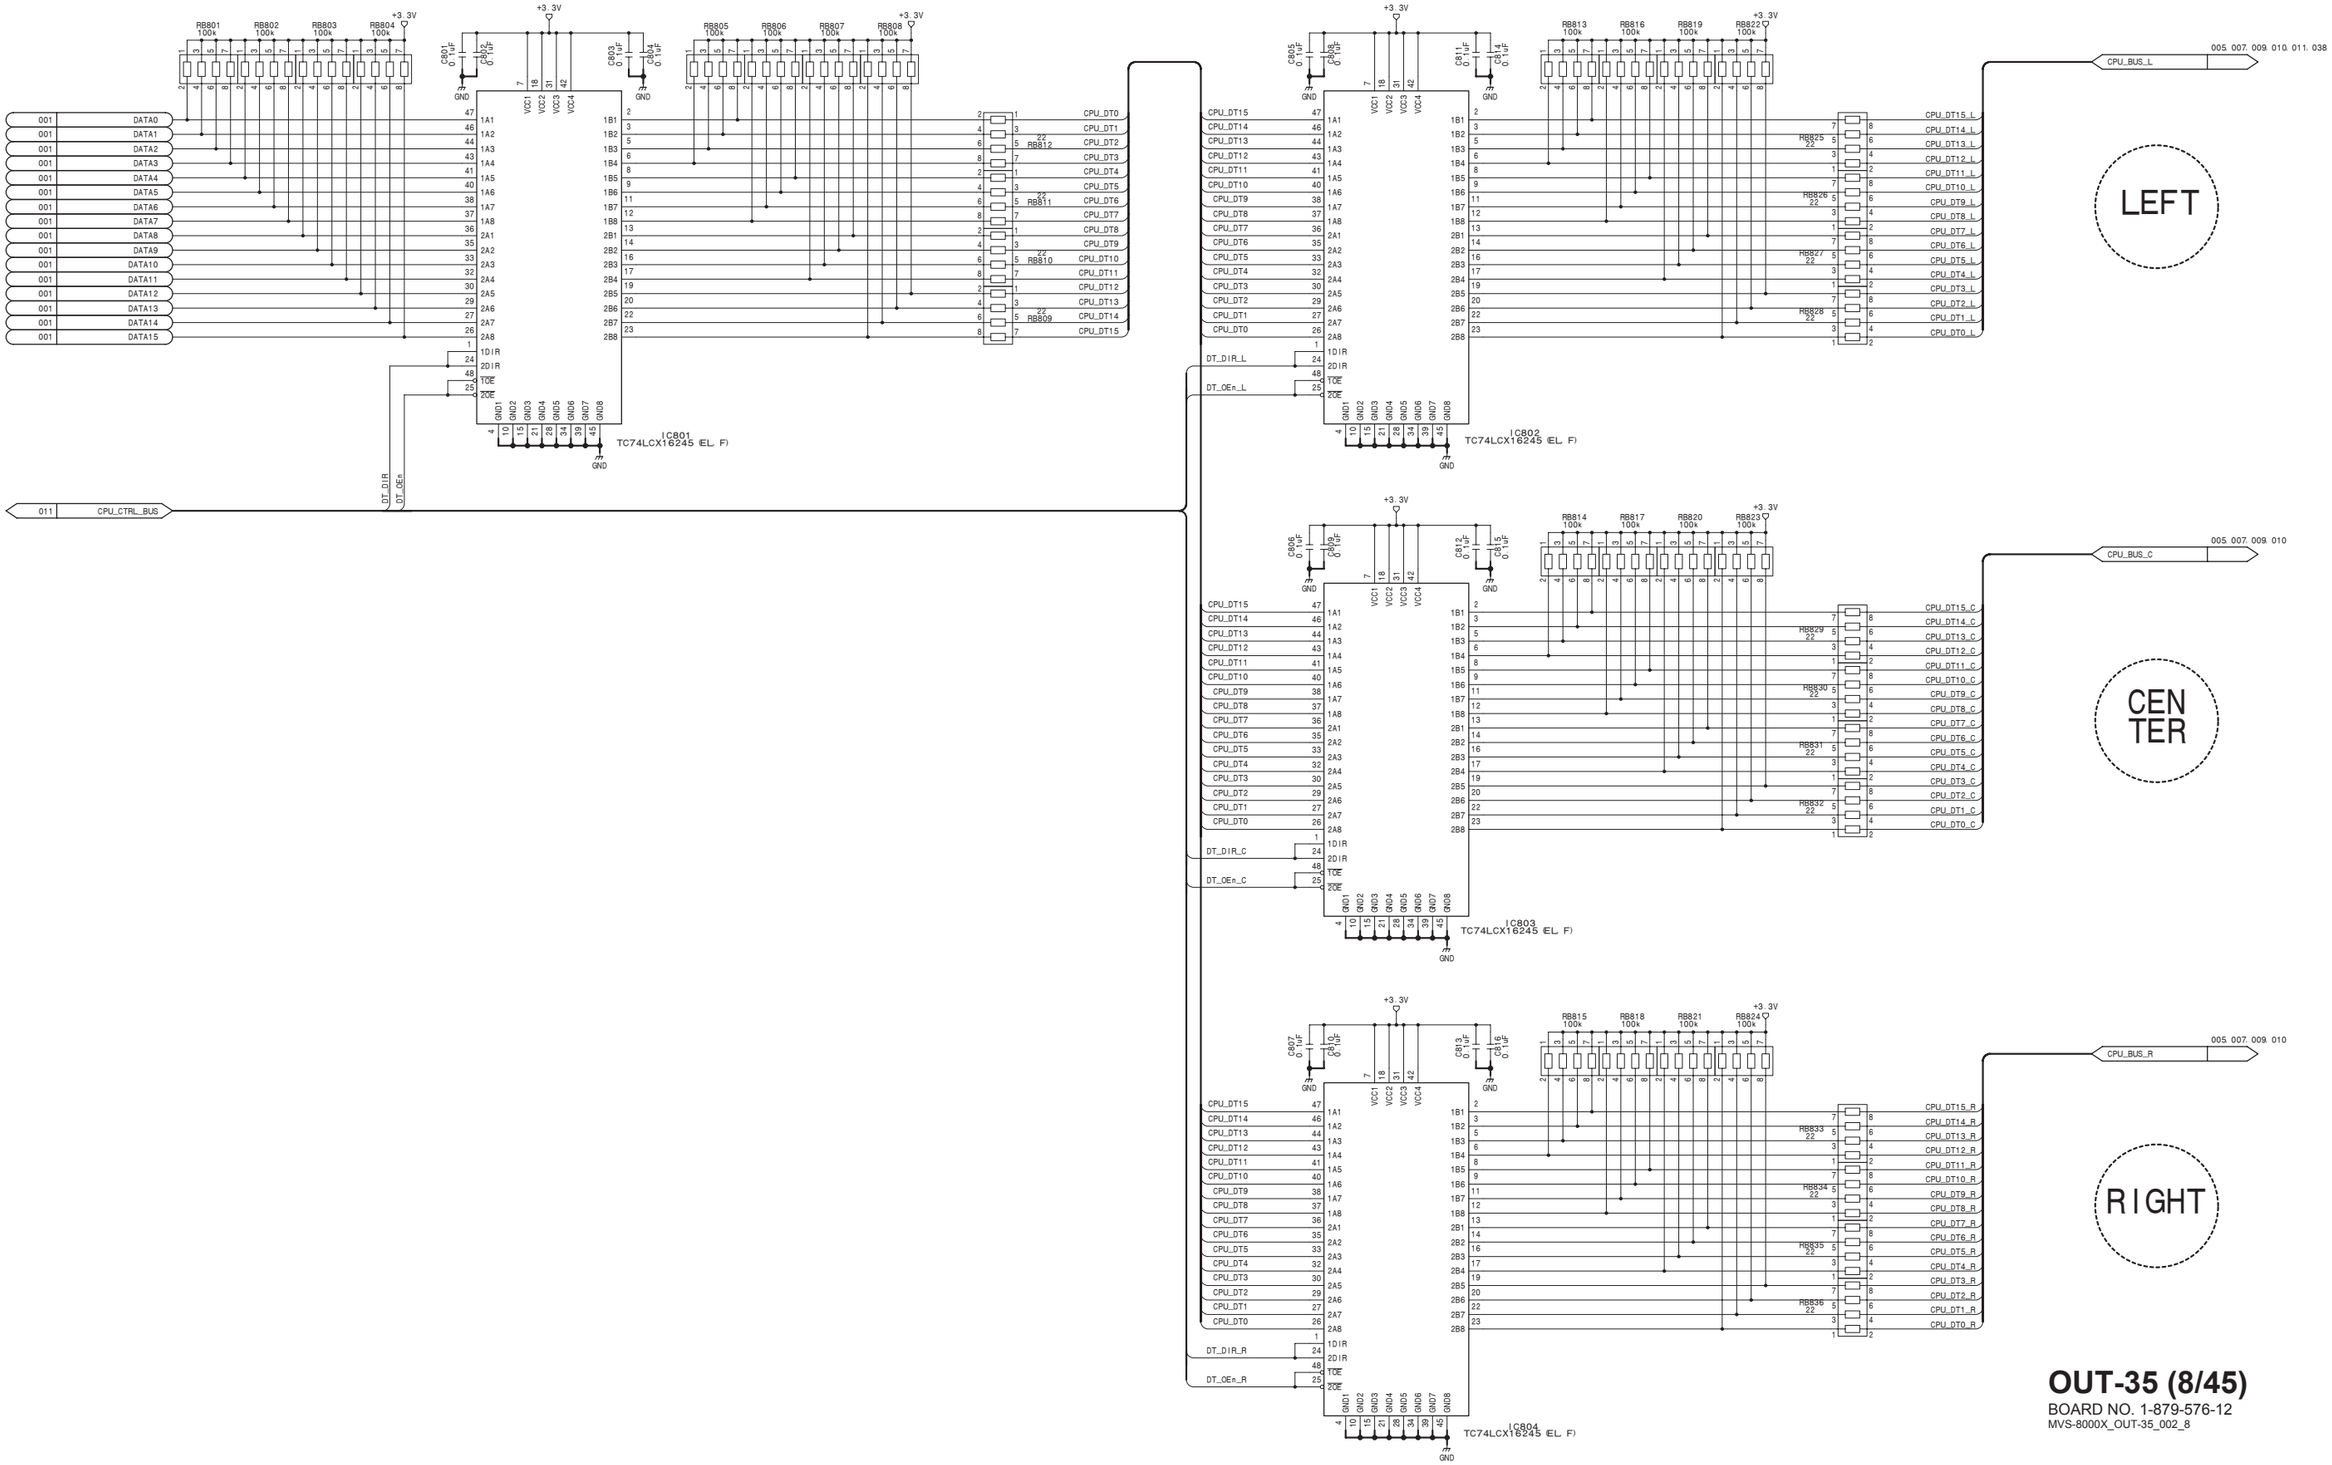

OUT-35 (8/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_8

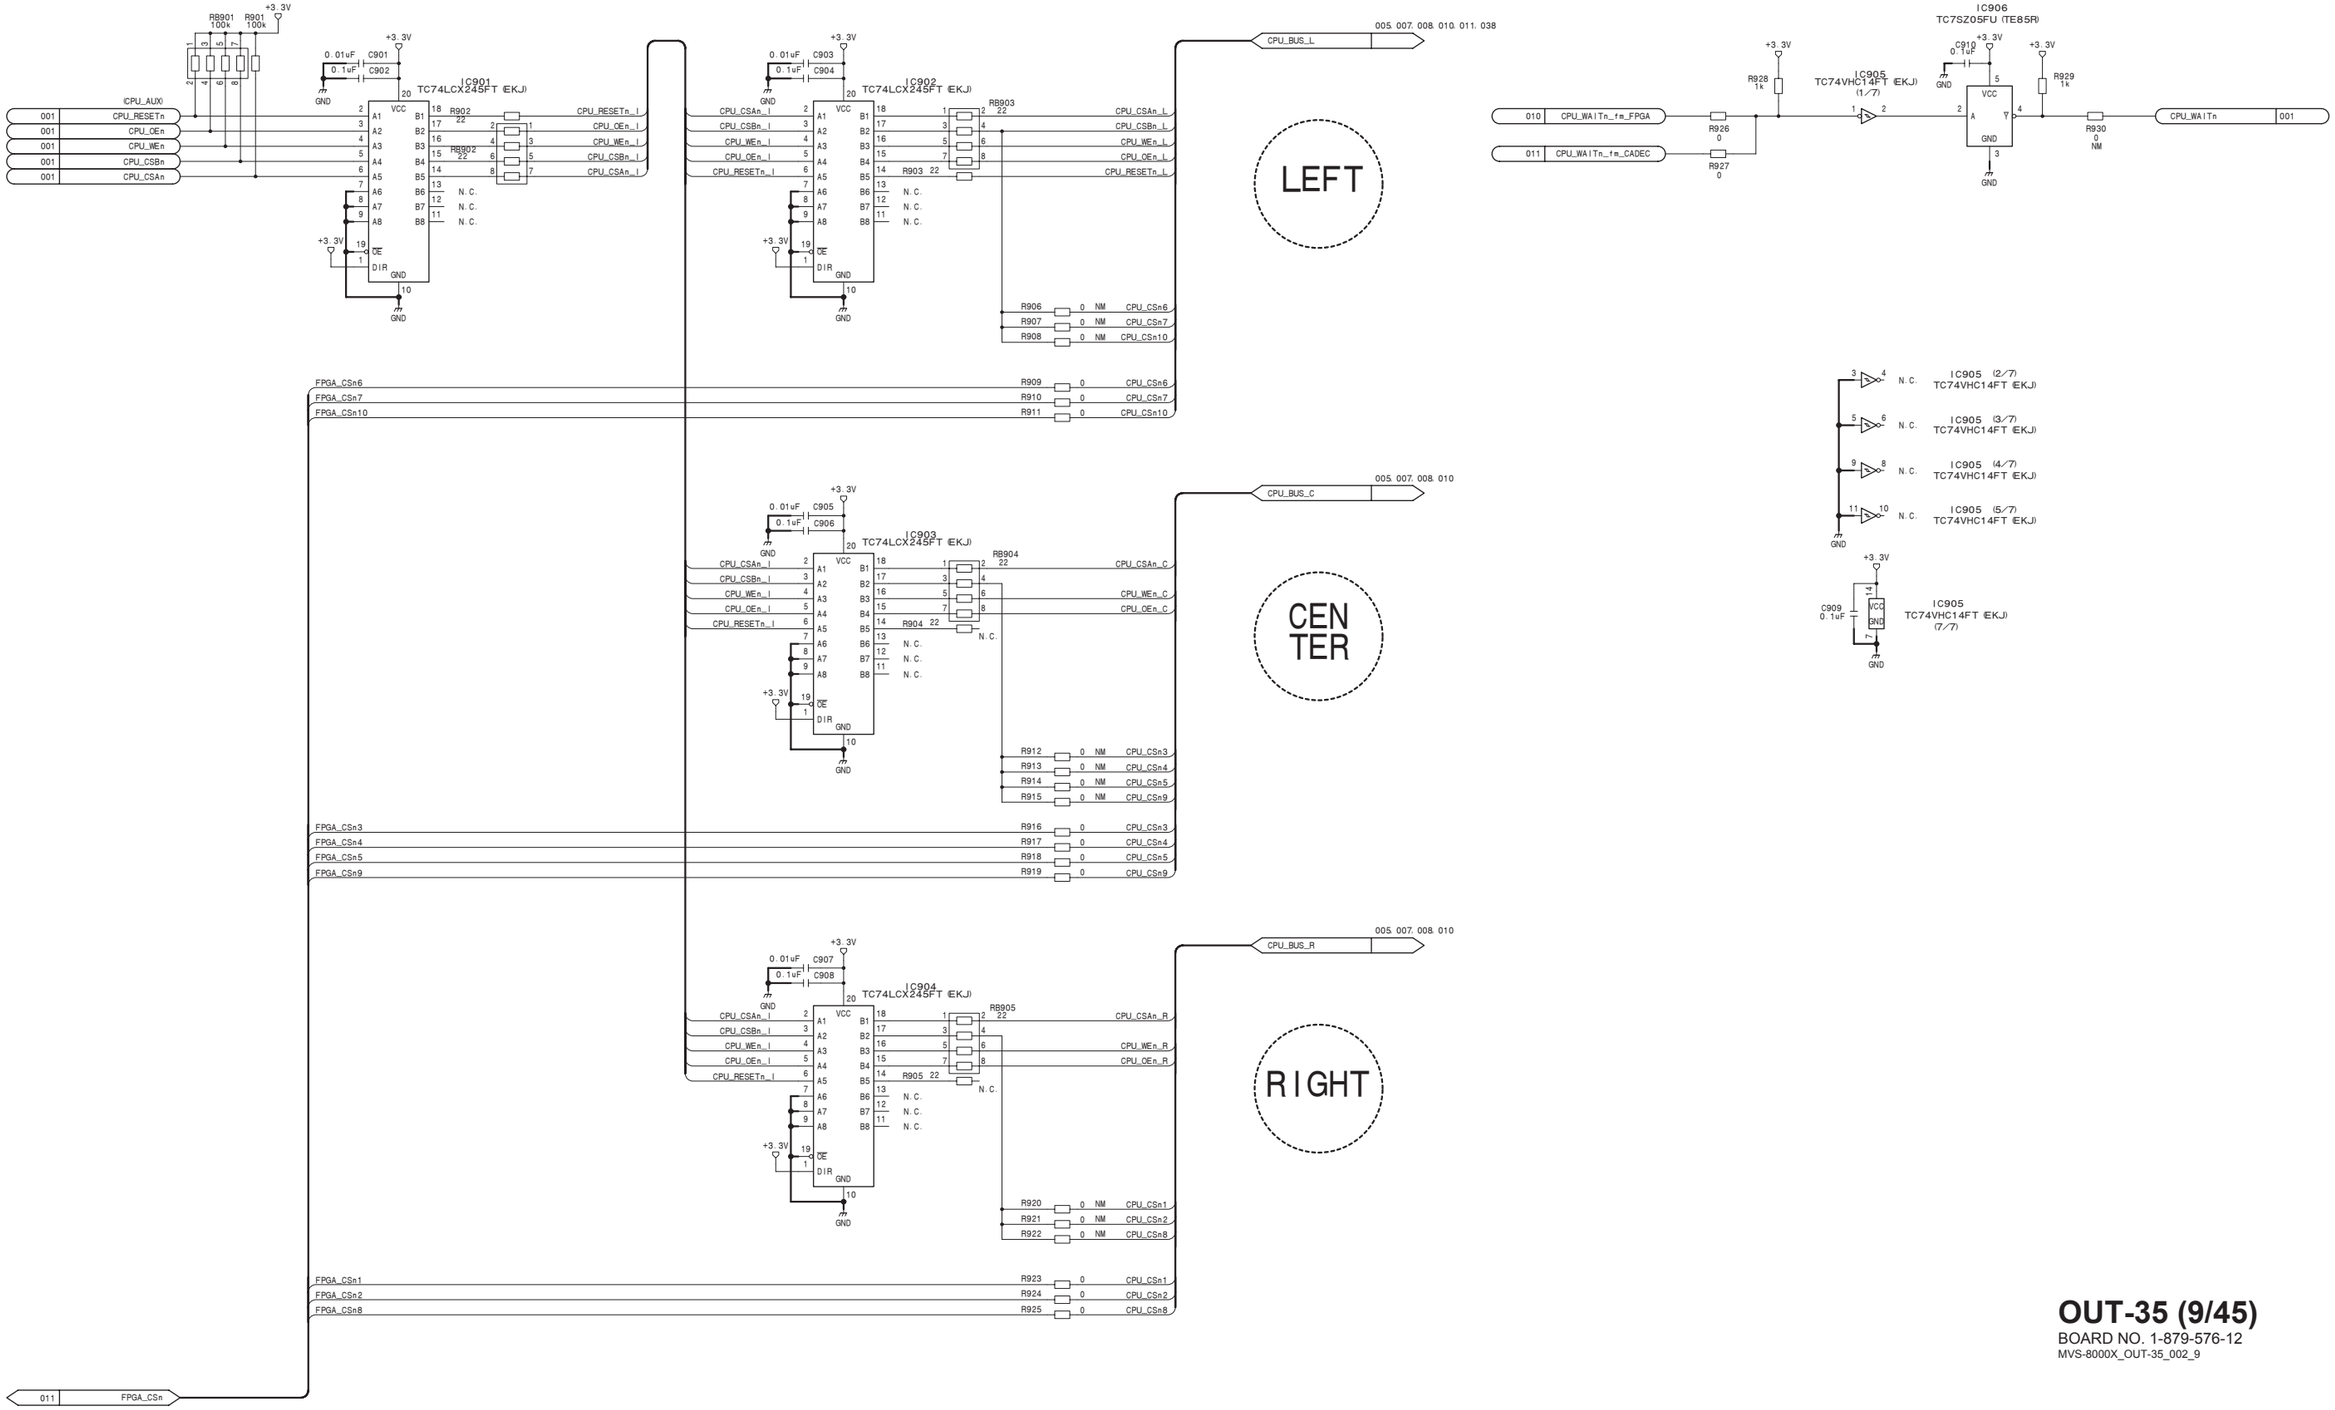

OUT-35 (9/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_9

OUT-35 (10/45)
SUFFIX: -12

005, 007, 008, 009, 011, 038

CPU_BUS_L

IC7 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_L	AB7	CPU_A<16>
CPU_AD15_L	AC7	CPU_A<15>
CPU_AD14_L	AE7	CPU_A<14>
CPU_AD13_L	AF7	CPU_A<13>
CPU_AD12_L	AB6	CPU_A<12>
CPU_AD11_L	AC6	CPU_A<11>
CPU_AD10_L	AD6	CPU_A<10>
CPU_AD9_L	AE6	CPU_A<9>
CPU_AD8_L	AA5	CPU_A<8>
CPU_AD7_L	W5	CPU_A<7>
CPU_AD6_L	Y6	CPU_A<6>
CPU_AD5_L	AE5	CPU_A<5>
CPU_AD4_L	AF5	CPU_A<4>
CPU_AD3_L	Y5	CPU_A<3>
CPU_AD2_L	AF4	CPU_A<2>
CPU_AD1_L	AF3	CPU_A<1>
		MFSD I
CPU_DT15_L	AD11	CPU_D<15>
CPU_DT14_L	AE11	CPU_D<14>
CPU_DT13_L	AD10	CPU_D<13>
CPU_DT12_L	AE10	CPU_D<12>
CPU_DT11_L	AF10	CPU_D<11>
CPU_DT10_L	AA9	CPU_D<10>
CPU_DT9_L	AB9	CPU_D<9>
CPU_DT8_L	AC9	CPU_D<8>
CPU_DT7_L	AD9	CPU_D<7>
CPU_DT6_L	AF9	CPU_D<6>
CPU_DT5_L	W8	CPU_D<5>
CPU_DT4_L	Y8	CPU_D<4>
CPU_DT3_L	AA8	CPU_D<3>
CPU_DT2_L	AC8	CPU_D<2>
CPU_DT1_L	AD8	CPU_D<1>
CPU_DT0_L	AE8	CPU_D<0>
CPU_CSn7	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_L	AA7	CPU_CSn<0>
CPU_WEn_L	AE12	CPU_WEn
CPU_OEn_L	AF12	CPU_REn
CPU_CLK7	AC11	CPU_CLK

NM C1001 0.1uF R1001 75 GND

IC6 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_L	AB7	CPU_A<16>
CPU_AD15_L	AC7	CPU_A<15>
CPU_AD14_L	AE7	CPU_A<14>
CPU_AD13_L	AF7	CPU_A<13>
CPU_AD12_L	AB6	CPU_A<12>
CPU_AD11_L	AC6	CPU_A<11>
CPU_AD10_L	AD6	CPU_A<10>
CPU_AD9_L	AE6	CPU_A<9>
CPU_AD8_L	AA5	CPU_A<8>
CPU_AD7_L	W5	CPU_A<7>
CPU_AD6_L	Y6	CPU_A<6>
CPU_AD5_L	AE5	CPU_A<5>
CPU_AD4_L	AF5	CPU_A<4>
CPU_AD3_L	Y5	CPU_A<3>
CPU_AD2_L	AF4	CPU_A<2>
CPU_AD1_L	AF3	CPU_A<1>
		MFSD I
CPU_DT15_L	AD11	CPU_D<15>
CPU_DT14_L	AE11	CPU_D<14>
CPU_DT13_L	AD10	CPU_D<13>
CPU_DT12_L	AE10	CPU_D<12>
CPU_DT11_L	AF10	CPU_D<11>
CPU_DT10_L	AA9	CPU_D<10>
CPU_DT9_L	AB9	CPU_D<9>
CPU_DT8_L	AC9	CPU_D<8>
CPU_DT7_L	AD9	CPU_D<7>
CPU_DT6_L	AF9	CPU_D<6>
CPU_DT5_L	W8	CPU_D<5>
CPU_DT4_L	Y8	CPU_D<4>
CPU_DT3_L	AA8	CPU_D<3>
CPU_DT2_L	AC8	CPU_D<2>
CPU_DT1_L	AD8	CPU_D<1>
CPU_DT0_L	AE8	CPU_D<0>
CPU_CSn6	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_L	AA7	CPU_CSn<0>
CPU_WEn_L	AE12	CPU_WEn
CPU_OEn_L	AF12	CPU_REn
CPU_CLK6	AC11	CPU_CLK

NM C1003 0.1uF R1003 75 GND

005, 007, 008, 009

CPU_BUS_C

IC5 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_C	AB7	CPU_A<16>
CPU_AD15_C	AC7	CPU_A<15>
CPU_AD14_C	AE7	CPU_A<14>
CPU_AD13_C	AF7	CPU_A<13>
CPU_AD12_C	AB6	CPU_A<12>
CPU_AD11_C	AC6	CPU_A<11>
CPU_AD10_C	AD6	CPU_A<10>
CPU_AD9_C	AE6	CPU_A<9>
CPU_AD8_C	AA5	CPU_A<8>
CPU_AD7_C	W5	CPU_A<7>
CPU_AD6_C	Y6	CPU_A<6>
CPU_AD5_C	AE5	CPU_A<5>
CPU_AD4_C	AF5	CPU_A<4>
CPU_AD3_C	Y5	CPU_A<3>
CPU_AD2_C	AF4	CPU_A<2>
CPU_AD1_C	AF3	CPU_A<1>
		MFSD I
CPU_DT15_C	AD11	CPU_D<15>
CPU_DT14_C	AE11	CPU_D<14>
CPU_DT13_C	AD10	CPU_D<13>
CPU_DT12_C	AE10	CPU_D<12>
CPU_DT11_C	AF10	CPU_D<11>
CPU_DT10_C	AA9	CPU_D<10>
CPU_DT9_C	AB9	CPU_D<9>
CPU_DT8_C	AC9	CPU_D<8>
CPU_DT7_C	AD9	CPU_D<7>
CPU_DT6_C	AF9	CPU_D<6>
CPU_DT5_C	W8	CPU_D<5>
CPU_DT4_C	Y8	CPU_D<4>
CPU_DT3_C	AA8	CPU_D<3>
CPU_DT2_C	AC8	CPU_D<2>
CPU_DT1_C	AD8	CPU_D<1>
CPU_DT0_C	AE8	CPU_D<0>
CPU_CSn5	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_C	AA7	CPU_CSn<0>
CPU_WEn_C	AE12	CPU_WEn
CPU_OEn_C	AF12	CPU_REn
CPU_CLK5	AC11	CPU_CLK

NM C1004 0.1uF R1004 75 GND

IC4 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_C	AB7	CPU_A<16>
CPU_AD15_C	AC7	CPU_A<15>
CPU_AD14_C	AE7	CPU_A<14>
CPU_AD13_C	AF7	CPU_A<13>
CPU_AD12_C	AB6	CPU_A<12>
CPU_AD11_C	AC6	CPU_A<11>
CPU_AD10_C	AD6	CPU_A<10>
CPU_AD9_C	AE6	CPU_A<9>
CPU_AD8_C	AA5	CPU_A<8>
CPU_AD7_C	W5	CPU_A<7>
CPU_AD6_C	Y6	CPU_A<6>
CPU_AD5_C	AE5	CPU_A<5>
CPU_AD4_C	AF5	CPU_A<4>
CPU_AD3_C	Y5	CPU_A<3>
CPU_AD2_C	AF4	CPU_A<2>
CPU_AD1_C	AF3	CPU_A<1>
		MFSD I
CPU_DT15_C	AD11	CPU_D<15>
CPU_DT14_C	AE11	CPU_D<14>
CPU_DT13_C	AD10	CPU_D<13>
CPU_DT12_C	AE10	CPU_D<12>
CPU_DT11_C	AF10	CPU_D<11>
CPU_DT10_C	AA9	CPU_D<10>
CPU_DT9_C	AB9	CPU_D<9>
CPU_DT8_C	AC9	CPU_D<8>
CPU_DT7_C	AD9	CPU_D<7>
CPU_DT6_C	AF9	CPU_D<6>
CPU_DT5_C	W8	CPU_D<5>
CPU_DT4_C	Y8	CPU_D<4>
CPU_DT3_C	AA8	CPU_D<3>
CPU_DT2_C	AC8	CPU_D<2>
CPU_DT1_C	AD8	CPU_D<1>
CPU_DT0_C	AE8	CPU_D<0>
CPU_CSn4	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_C	AA7	CPU_CSn<0>
CPU_WEn_C	AE12	CPU_WEn
CPU_OEn_C	AF12	CPU_REn
CPU_CLK4	AC11	CPU_CLK

NM C1005 0.1uF R1005 75 GND

IC3 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_C	AB7	CPU_A<16>
CPU_AD15_C	AC7	CPU_A<15>
CPU_AD14_C	AE7	CPU_A<14>
CPU_AD13_C	AF7	CPU_A<13>
CPU_AD12_C	AB6	CPU_A<12>
CPU_AD11_C	AC6	CPU_A<11>
CPU_AD10_C	AD6	CPU_A<10>
CPU_AD9_C	AE6	CPU_A<9>
CPU_AD8_C	AA5	CPU_A<8>
CPU_AD7_C	W5	CPU_A<7>
CPU_AD6_C	Y6	CPU_A<6>
CPU_AD5_C	AE5	CPU_A<5>
CPU_AD4_C	AF5	CPU_A<4>
CPU_AD3_C	Y5	CPU_A<3>
CPU_AD2_C	AF4	CPU_A<2>
CPU_AD1_C	AF3	CPU_A<1>
		MFSD I
CPU_DT15_C	AD11	CPU_D<15>
CPU_DT14_C	AE11	CPU_D<14>
CPU_DT13_C	AD10	CPU_D<13>
CPU_DT12_C	AE10	CPU_D<12>
CPU_DT11_C	AF10	CPU_D<11>
CPU_DT10_C	AA9	CPU_D<10>
CPU_DT9_C	AB9	CPU_D<9>
CPU_DT8_C	AC9	CPU_D<8>
CPU_DT7_C	AD9	CPU_D<7>
CPU_DT6_C	AF9	CPU_D<6>
CPU_DT5_C	W8	CPU_D<5>
CPU_DT4_C	Y8	CPU_D<4>
CPU_DT3_C	AA8	CPU_D<3>
CPU_DT2_C	AC8	CPU_D<2>
CPU_DT1_C	AD8	CPU_D<1>
CPU_DT0_C	AE8	CPU_D<0>
CPU_CSn3	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_C	AA7	CPU_CSn<0>
CPU_WEn_C	AE12	CPU_WEn
CPU_OEn_C	AF12	CPU_REn
CPU_CLK3	AC11	CPU_CLK

NM C1007 0.1uF R1007 75 GND

005, 007, 008, 009

CPU_BUS_R

IC2 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_R	AB7	CPU_A<16>
CPU_AD15_R	AC7	CPU_A<15>
CPU_AD14_R	AE7	CPU_A<14>
CPU_AD13_R	AF7	CPU_A<13>
CPU_AD12_R	AB6	CPU_A<12>
CPU_AD11_R	AC6	CPU_A<11>
CPU_AD10_R	AD6	CPU_A<10>
CPU_AD9_R	AE6	CPU_A<9>
CPU_AD8_R	AA5	CPU_A<8>
CPU_AD7_R	W5	CPU_A<7>
CPU_AD6_R	Y6	CPU_A<6>
CPU_AD5_R	AE5	CPU_A<5>
CPU_AD4_R	AF5	CPU_A<4>
CPU_AD3_R	Y5	CPU_A<3>
CPU_AD2_R	AF4	CPU_A<2>
CPU_AD1_R	AF3	CPU_A<1>
		MFSD I
CPU_DT15_R	AD11	CPU_D<15>
CPU_DT14_R	AE11	CPU_D<14>
CPU_DT13_R	AD10	CPU_D<13>
CPU_DT12_R	AE10	CPU_D<12>
CPU_DT11_R	AF10	CPU_D<11>
CPU_DT10_R	AA9	CPU_D<10>
CPU_DT9_R	AB9	CPU_D<9>
CPU_DT8_R	AC9	CPU_D<8>
CPU_DT7_R	AD9	CPU_D<7>
CPU_DT6_R	AF9	CPU_D<6>
CPU_DT5_R	W8	CPU_D<5>
CPU_DT4_R	Y8	CPU_D<4>
CPU_DT3_R	AA8	CPU_D<3>
CPU_DT2_R	AC8	CPU_D<2>
CPU_DT1_R	AD8	CPU_D<1>
CPU_DT0_R	AE8	CPU_D<0>
CPU_CSn2	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_R	AA7	CPU_CSn<0>
CPU_WEn_R	AE12	CPU_WEn
CPU_OEn_R	AF12	CPU_REn
CPU_CLK2	AC11	CPU_CLK

NM C1010 0.1uF R1009 75 GND

IC1 (5/14) XC5VLX50T-1FFG665C (S1)

CPU_AD16_R	AB7	CPU_A<16>
CPU_AD15_R	AC7	CPU_A<15>
CPU_AD14_R	AE7	CPU_A<14>
CPU_AD13_R	AF7	CPU_A<13>
CPU_AD12_R	AB6	CPU_A<12>
CPU_AD11_R	AC6	CPU_A<11>
CPU_AD10_R	AD6	CPU_A<10>
CPU_AD9_R	AE6	CPU_A<9>
CPU_AD8_R	AA5	CPU_A<8>
CPU_AD7_R	W5	CPU_A<7>
CPU_AD6_R	Y6	CPU_A<6>
CPU_AD5_R	AE5	CPU_A<5>
CPU_AD4_R	AF5	CPU_A<4>
CPU_AD3_R	Y5	CPU_A<3>
CPU_AD2_R	AF4	CPU_A<2>
CPU_AD1_R	AF3	CPU_A<1>
		MFSD I
CPU_DT15_R	AD11	CPU_D<15>
CPU_DT14_R	AE11	CPU_D<14>
CPU_DT13_R	AD10	CPU_D<13>
CPU_DT12_R	AE10	CPU_D<12>
CPU_DT11_R	AF10	CPU_D<11>
CPU_DT10_R	AA9	CPU_D<10>
CPU_DT9_R	AB9	CPU_D<9>
CPU_DT8_R	AC9	CPU_D<8>
CPU_DT7_R	AD9	CPU_D<7>
CPU_DT6_R	AF9	CPU_D<6>
CPU_DT5_R	W8	CPU_D<5>
CPU_DT4_R	Y8	CPU_D<4>
CPU_DT3_R	AA8	CPU_D<3>
CPU_DT2_R	AC8	CPU_D<2>
CPU_DT1_R	AD8	CPU_D<1>
CPU_DT0_R	AE8	CPU_D<0>
CPU_CSn1	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_R	AA7	CPU_CSn<0>
CPU_WEn_R	AE12	CPU_WEn
CPU_OEn_R	AF12	CPU_REn
CPU_CLK1	AC11	CPU_CLK

NM C1011 0.1uF R1010 75 GND

CPU_WAITn_fm_FPGA 009

CCR_FPGA

IC10 (8/14) XC5VLX110-1FFG1153C (10)

CPU_AD16_L	AH10	CPU_A [16]
CPU_AD15_L	AG10	CPU_A [15]
CPU_AD14_L	AG11	CPU_A [14]
CPU_AD13_L	AF10	CPU_A [13]
CPU_AD12_L	AJ9	CPU_A [12]
CPU_AD11_L	AH9	CPU_A [11]
CPU_AD10_L	AK9	CPU_A [10]
CPU_AD9_L	AJ10	CPU_A [9]
CPU_AD8_L	AK7	CPU_A [8]
CPU_AD7_L	AH8	CPU_A [7]
CPU_AD6_L	AG7	CPU_A [6]
CPU_AD5_L	AK8	CPU_A [5]
CPU_AD4_L	AJ6	CPU_A [4]
CPU_AD3_L	AK6	CPU_A [3]
CPU_AD2_L	AJ7	CPU_A [2]
CPU_AD1_L	AH7	CPU_A [1]
CPU_DT15_L	AA10	CPU_D [15]
CPU_DT14_L	AB10	CPU_D [14]
CPU_DT13_L	AD10	CPU_D [13]
CPU_DT12_L	AC10	CPU_D [12]
CPU_DT11_L	AD9	CPU_D [11]
CPU_DT10_L	AE9	CPU_D [10]
CPU_DT9_L	AC9	CPU_D [9]
CPU_DT8_L	AA9	CPU_D [8]
CPU_DT7_L	AE8	CPU_D [7]
CPU_DT6_L	AD7	CPU_D [6]
CPU_DT5_L	AE7	CPU_D [5]
CPU_DT4_L	AC8	CPU_D [4]
CPU_DT3_L	AC7	CPU_D [3]
CPU_DT2_L	AB8	CPU_D [2]
CPU_DT1_L	AB7	CPU_D [1]
CPU_DT0_L	AA8	CPU_D [0]
CPU_CSAn_L	AF8	CPU_CSn [0] CPU_WAITn AE11
CPU_CSn10	AF9	CPU_CSn [1]
CPU_WEn_L	AD11	CPU_WEn
CPU_OEn_L	AF11	CPU_REn
CPU_CLK10	AH12	CPU_CLK

N.C.

NM C1002 0.1uF R1002 75 GND

MSD_FPGA

IC9 (11/19) XC5VLX50-1FFG1153C (10)

CPU_AD16_C	AG11	CPU_A [16]
CPU_AD15_C	AF10	CPU_A [15]
CPU_AD14_C	AG10	CPU_A [14]
CPU_AD13_C	AH10	CPU_A [13]
CPU_AD12_C	AJ10	CPU_A [12]
CPU_AD11_C	AH9	CPU_A [11]
CPU_AD10_C	AJ9	CPU_A [10]
CPU_AD9_C	AK9	CPU_A [9]
CPU_AD8_C	AH8	CPU_A [8]
CPU_AD7_C	AK8	CPU_A [7]
CPU_AD6_C	AG7	CPU_A [6]
CPU_AD5_C	AH7	CPU_A [5]
CPU_AD4_C	AJ7	CPU_A [4]
CPU_AD3_C	AK7	CPU_A [3]
CPU_AD2_C	AJ6	CPU_A [2]
CPU_AD1_C	AK6	CPU_A [1]
CPU_DT15_C	AB7	CPU_D [15]
CPU_DT14_C	AA8	CPU_D [14]
CPU_DT13_C	AA10	CPU_D [13]
CPU_DT12_C	AA9	CPU_D [12]
CPU_DT11_C	AB10	CPU_D [11]
CPU_DT10_C	AB8	CPU_D [10]
CPU_DT9_C	AC10	CPU_D [9]
CPU_DT8_C	AC9	CPU_D [8]
CPU_DT7_C	AD10	CPU_D [7]
CPU_DT6_C	AD9	CPU_D [6]
CPU_DT5_C	AE9	CPU_D [5]
CPU_DT4_C	AC8	CPU_D [4]
CPU_DT3_C	AE8	CPU_D [3]
CPU_DT2_C	AC7	CPU_D [2]
CPU_DT1_C	AD7	CPU_D [1]
CPU_DT0_C	AE7	CPU_D [0]
CPU_CSAn_C	AF8	CPU_CSn [0] CPU_WAITn AE11
CPU_CSn9	AF9	CPU_CSn [1]
CPU_WEn_C	AD11	CPU_WEn
CPU_OEn_C	AF11	CPU_REn
CPU_CLK9	AH12	CPU_CLK

NM C1006 0.1uF R1006 75 GND

FC_FPGA

IC8 (7/13) XC5VLX30T-1FFG665C (S1)

CPU_AD16_R	J21	CPU_A [16]
CPU_AD15_R	J23	CPU_A [15]
CPU_AD14_R	J24	CPU_A [14]
CPU_AD13_R	K21	CPU_A [13]
CPU_AD12_R	K22	CPU_A [12]
CPU_AD11_R	L23	CPU_A [11]
CPU_AD10_R	K25	CPU_A [10]
CPU_AD9_R	K26	CPU_A [9]
CPU_AD8_R	L24	CPU_A [8]
CPU_AD7_R	L25	CPU_A [7]
CPU_AD6_R	L22	CPU_A [6]
CPU_AD5_R	M21	CPU_A [5]
CPU_AD4_R	M26	CPU_A [4]
CPU_AD3_R	M25	CPU_A [3]
CPU_AD2_R	M24	CPU_A [2]
CPU_AD1_R	M22	CPU_A [1]
CPU_DT15_R	E22	CPU_D [15]
CPU_DT14_R	F22	CPU_D [14]
CPU_DT13_R	G22	CPU_D [13]
CPU_DT12_R	E23	CPU_D [12]
CPU_DT11_R	F23	CPU_D [11]
CPU_DT10_R	F24	CPU_D [10]
CPU_DT9_R	H22	CPU_D [9]
CPU_DT8_R	F25	CPU_D [8]
CPU_DT7_R	E26	CPU_D [7]
CPU_DT6_R	E25	CPU_D [6]
CPU_DT5_R	G24	CPU_D [5]
CPU_DT4_R	G25	CPU_D [4]
CPU_DT3_R	G26	CPU_D [3]
CPU_DT2_R	H23	CPU_D [2]
CPU_DT1_R	H24	CPU_D [1]
CPU_DT0_R	H26	CPU_D [0]
CPU_CSAn_R	N23	CPU_CSn [0] CPU_WAITn N24
CPU_CSn8	N26	CPU_CSn [1]
CPU_WEn_R	J26	CPU_WEn
CPU_OEn_R	J25	CPU_REn
	G21	CPU_CLK

CPU_CLK8

+2.5V C1008 0.1uF GND

3 5 R1011 22

NM C1009 0.1uF R1008 75 GND

IC601 TC7WZ34FK (TE85R) (3/4)

LEFT

CEN TER

RIGHT

OUT-35 (10/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_10

OUT-35 (11/45)

SUFFIX: -12

OUT-35 (11/45)
SUFFIX: -12

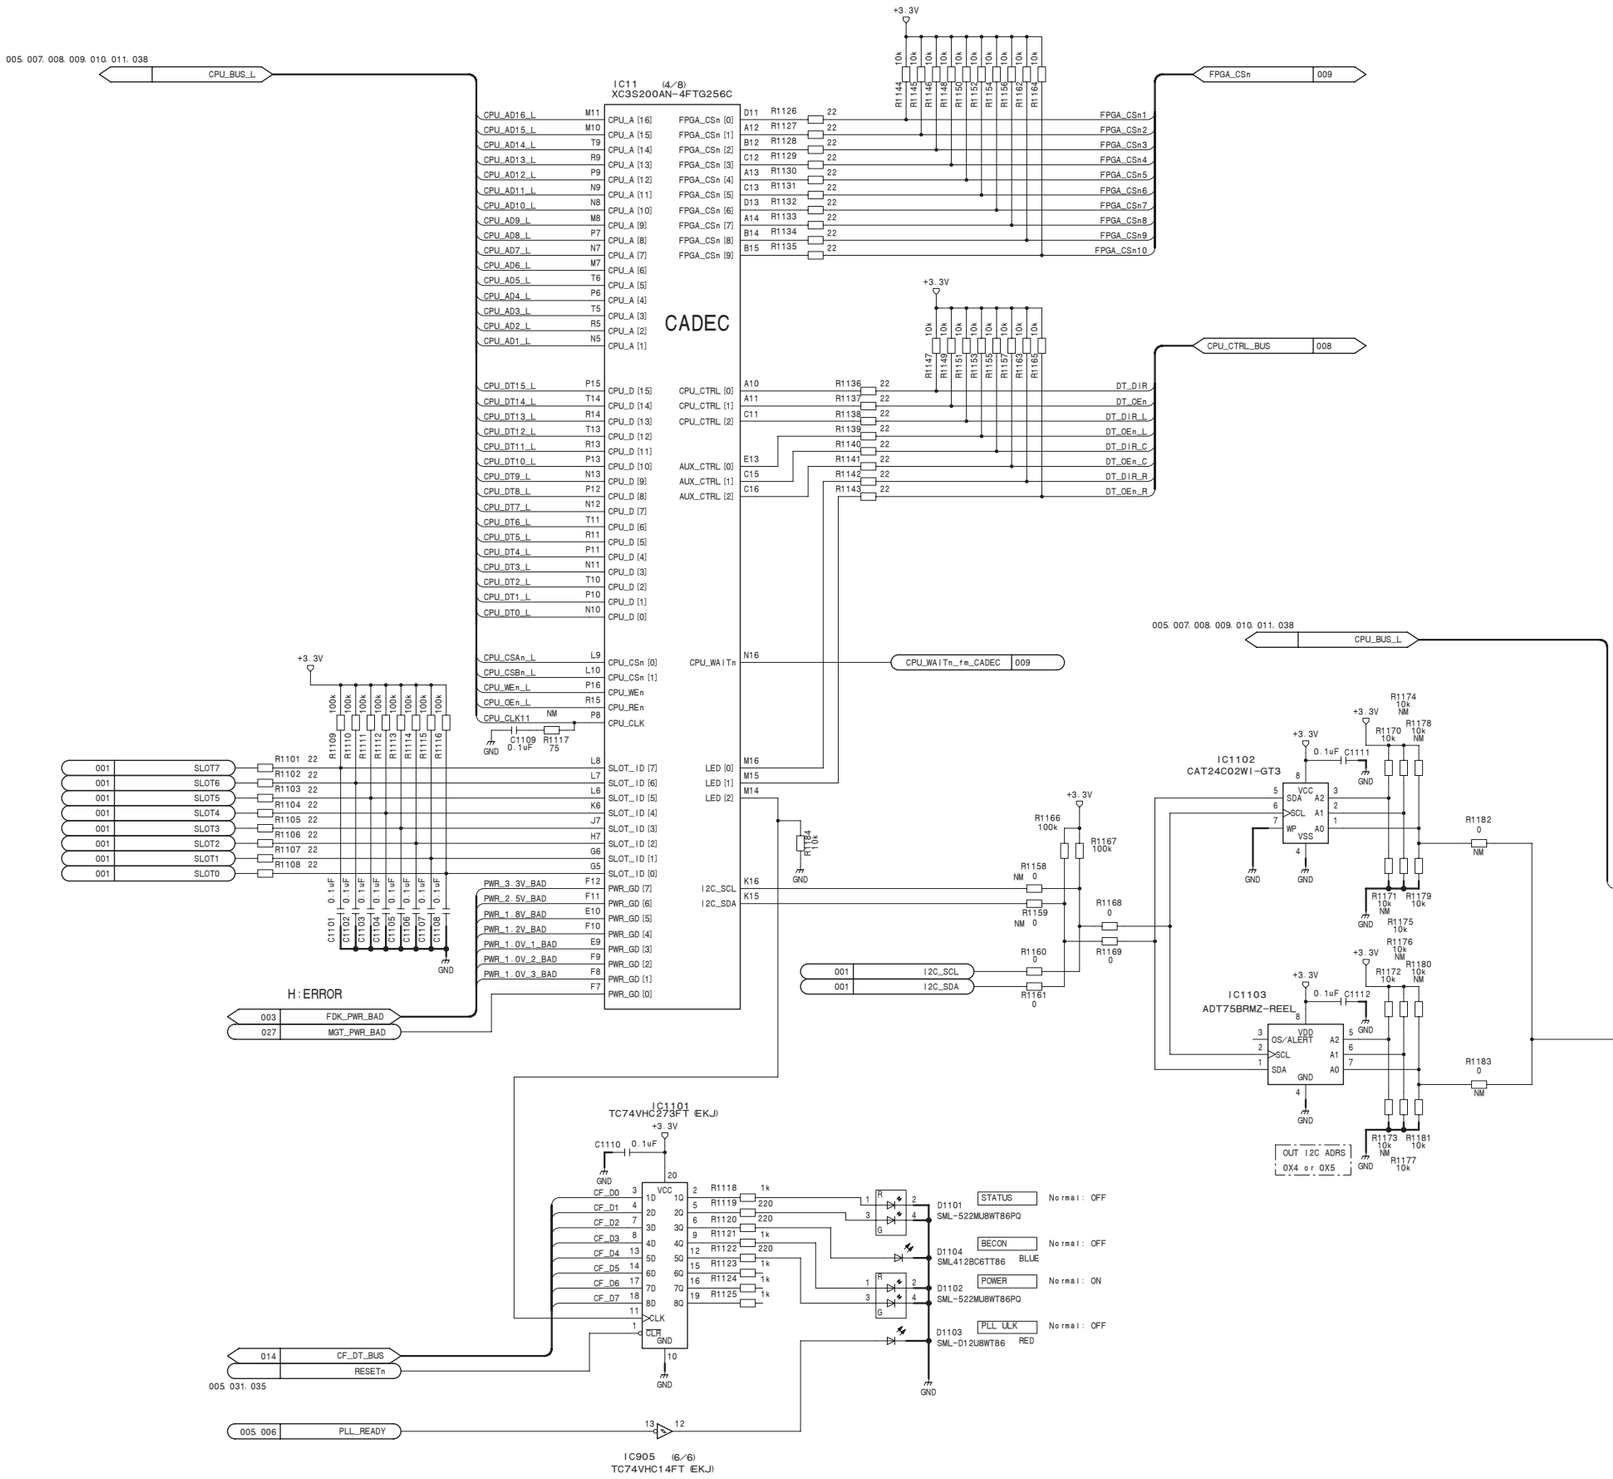

OUT-35 (11/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_11

OUT-35 (12/45)
SUFFIX: -12

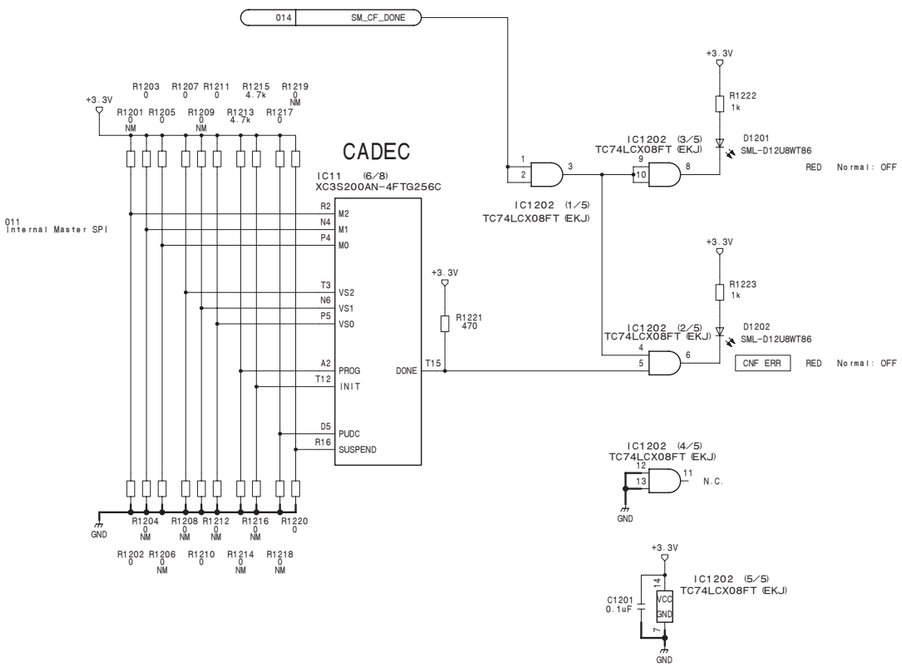

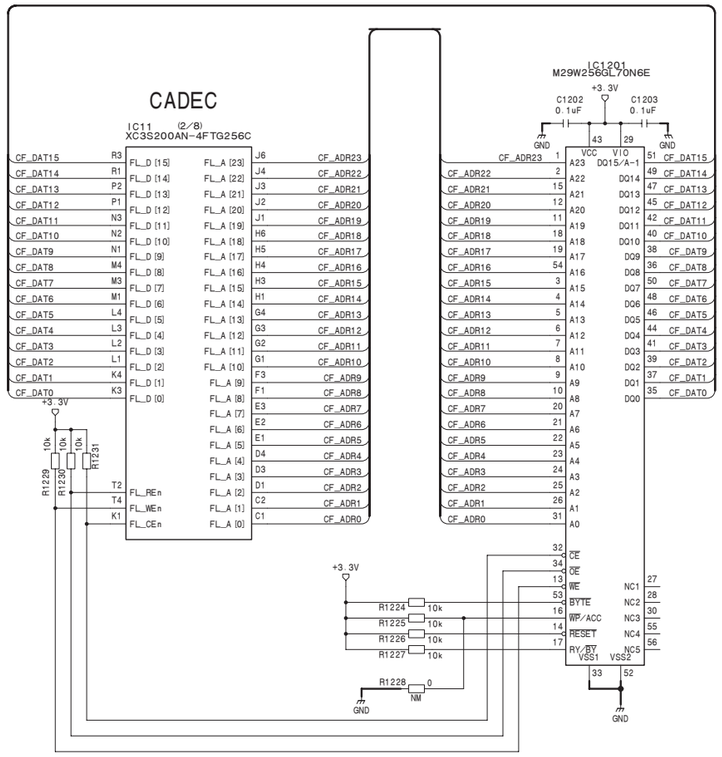

OUT-35 (12/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_12

OUT-35 (13/45)

SUFFIX: -12

OUT-35 (13/45)

SUFFIX: -12

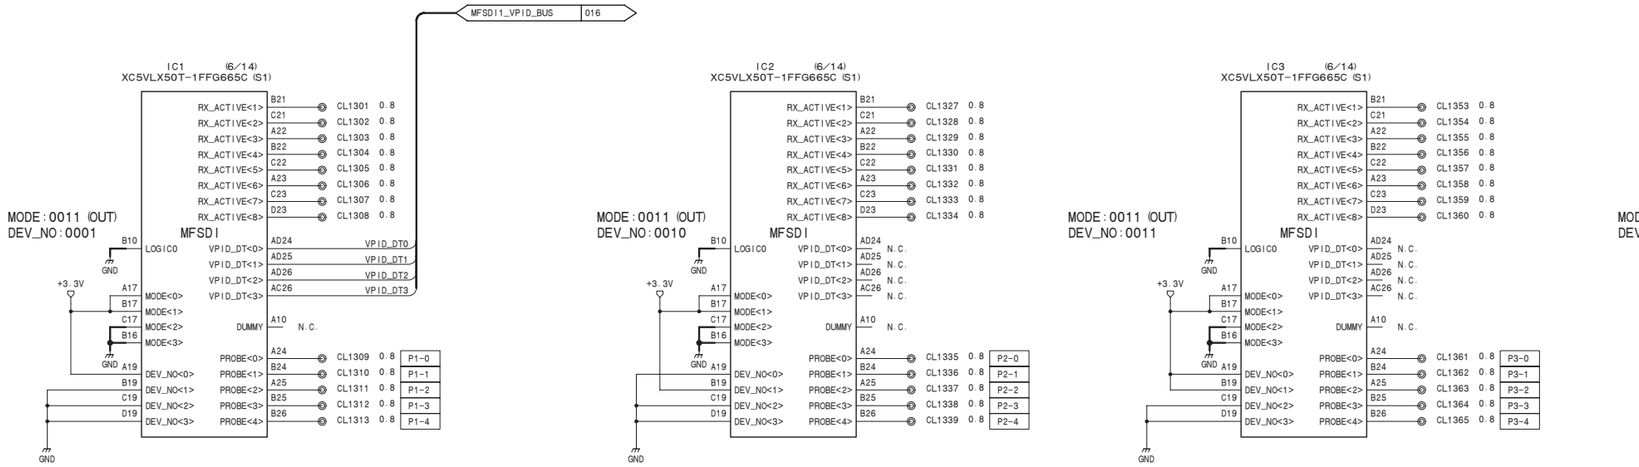



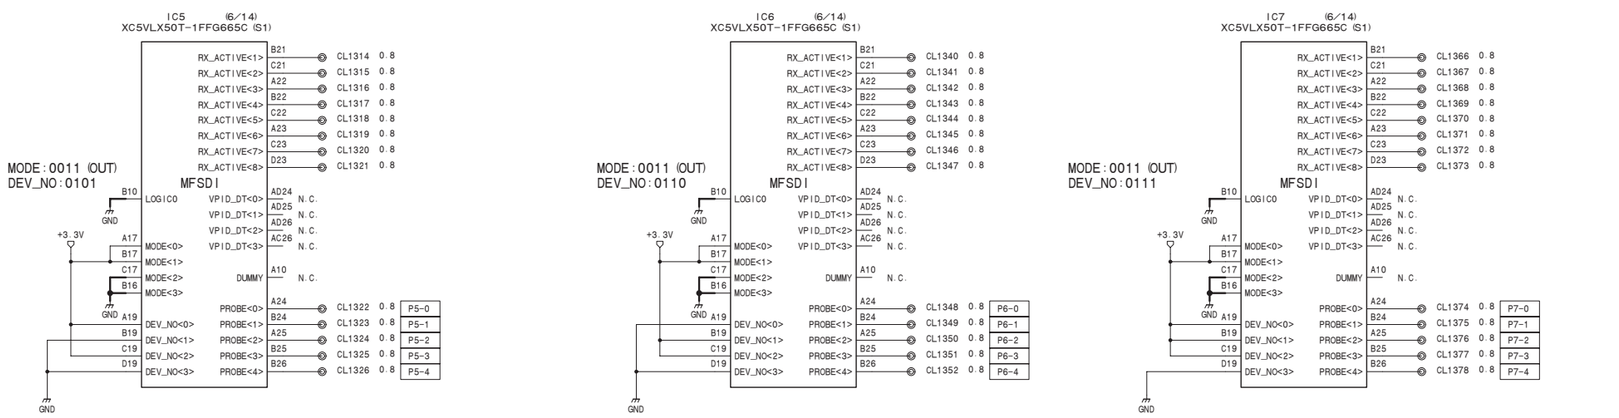



OUT-35 (13/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_13

OUT-35 (14/45)

SUFFIX: -12

OUT-35 (14/45)

SUFFIX: -12

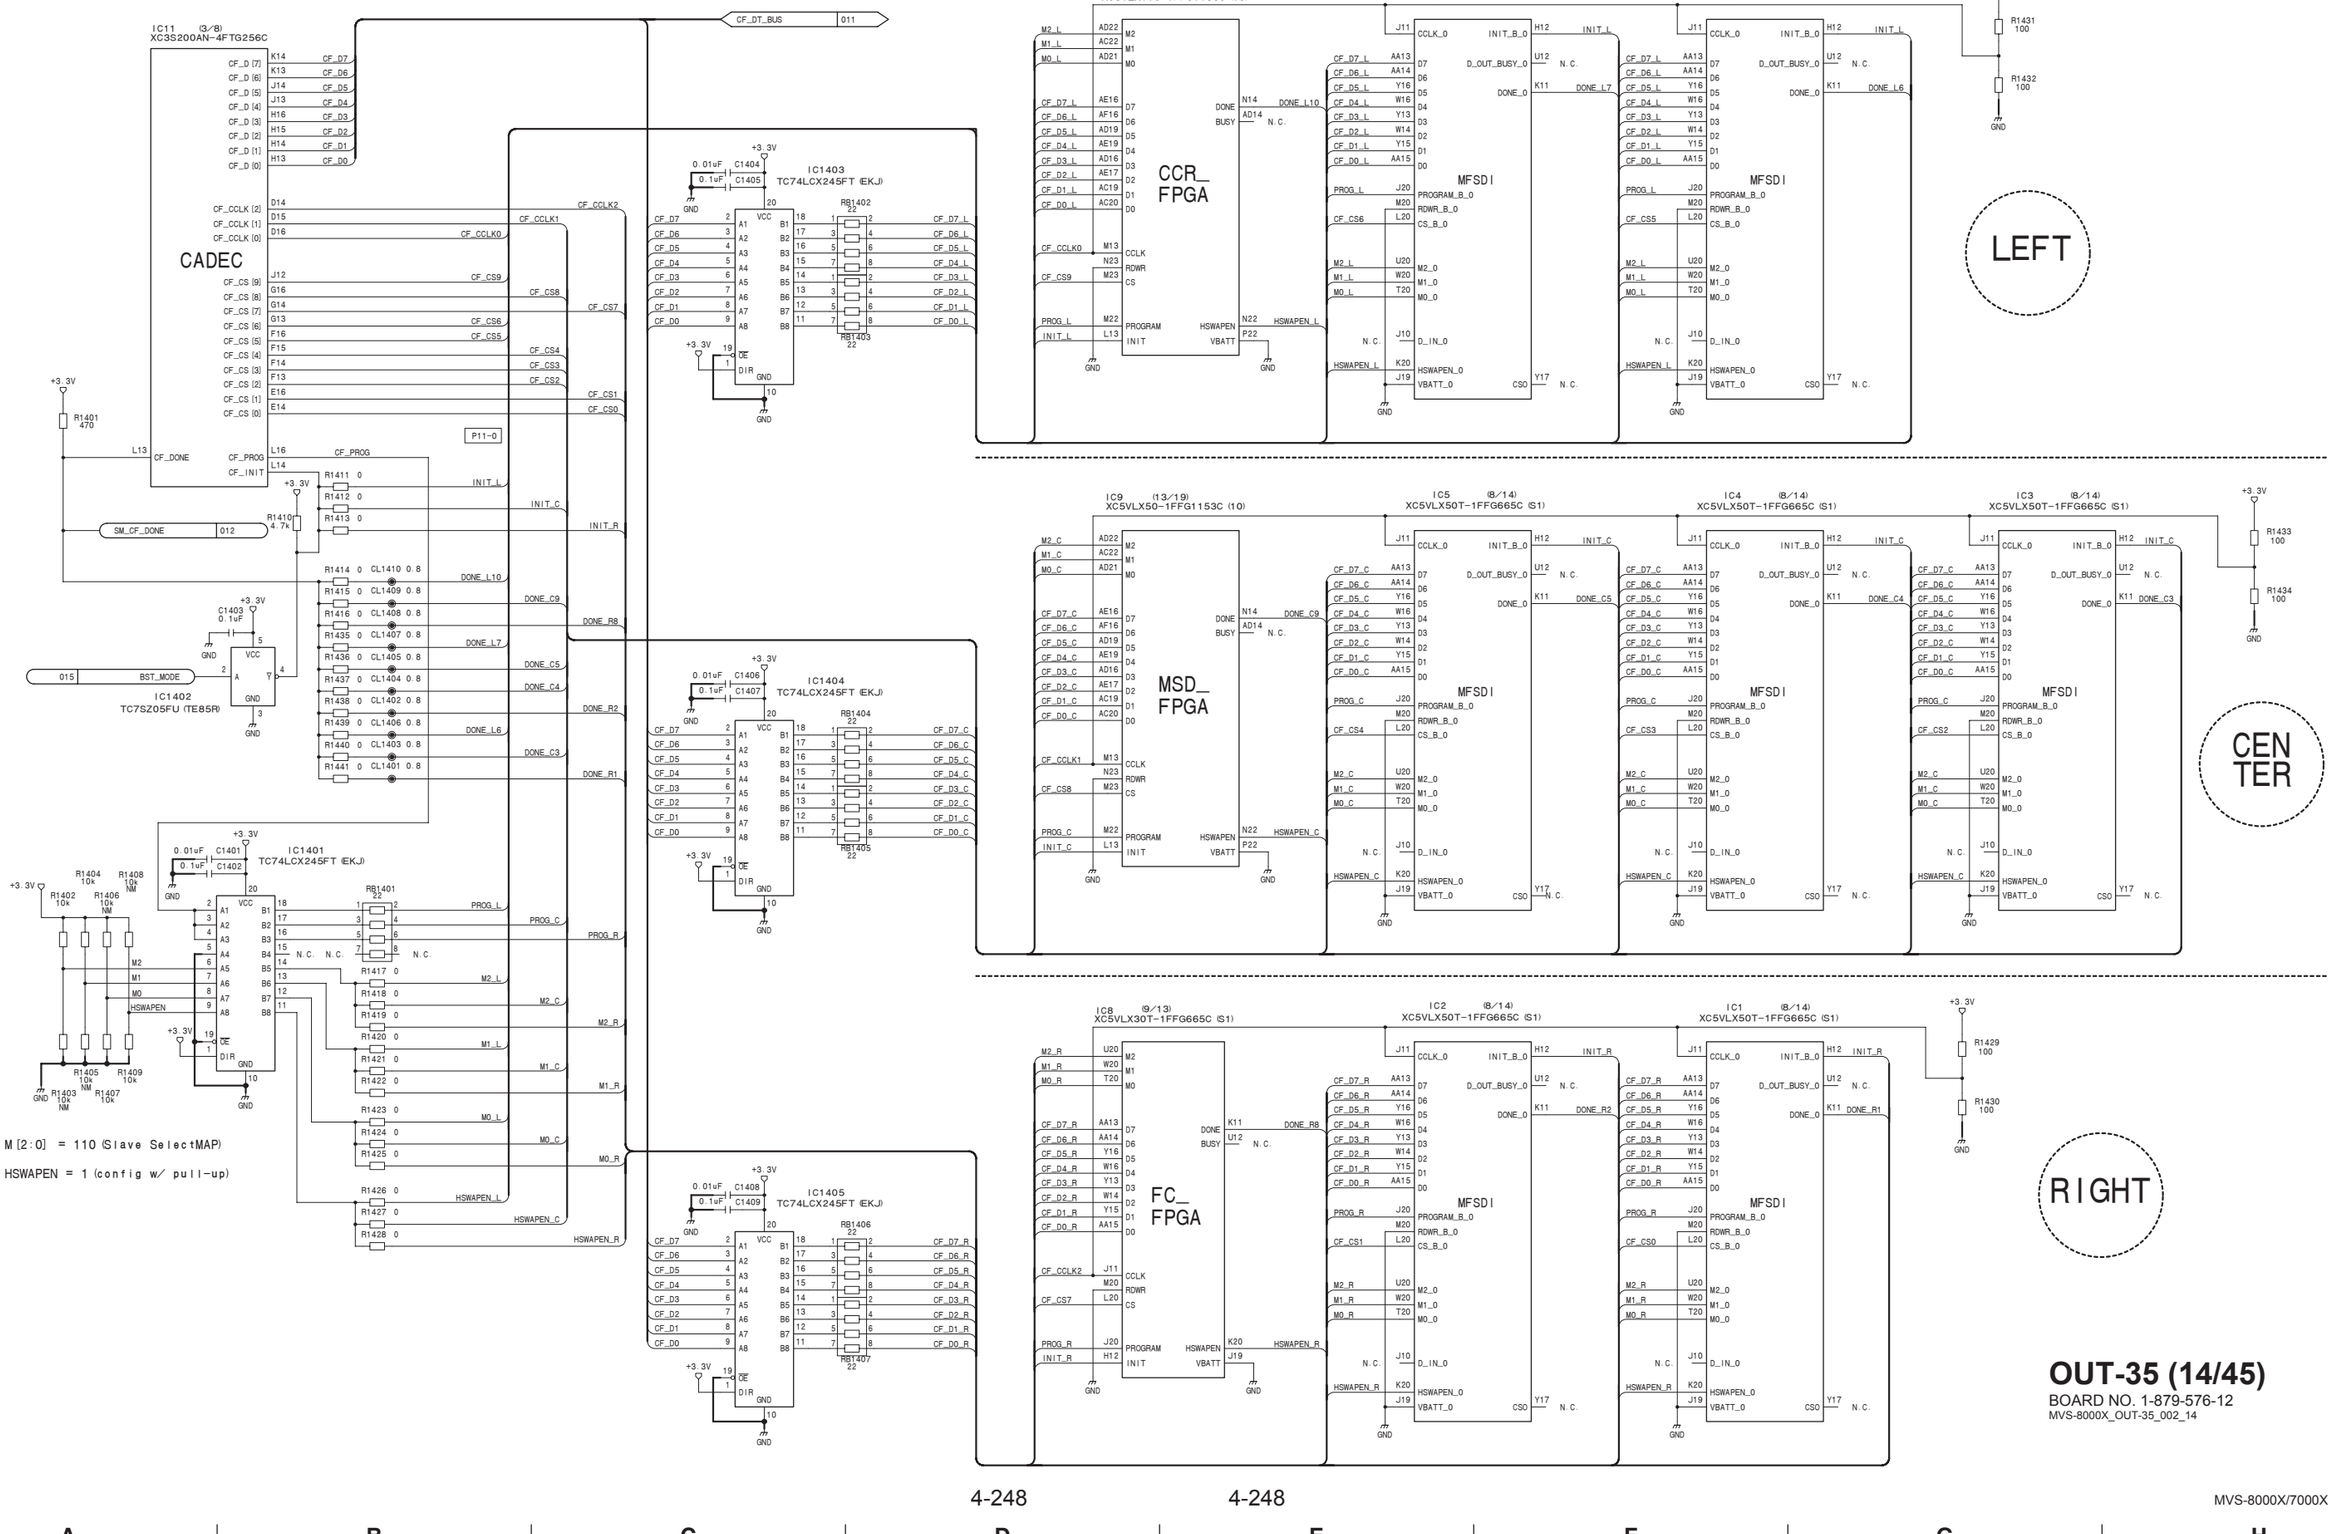

OUT-35 (14/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_14

OUT-35 (15/45)
SUFFIX: -12

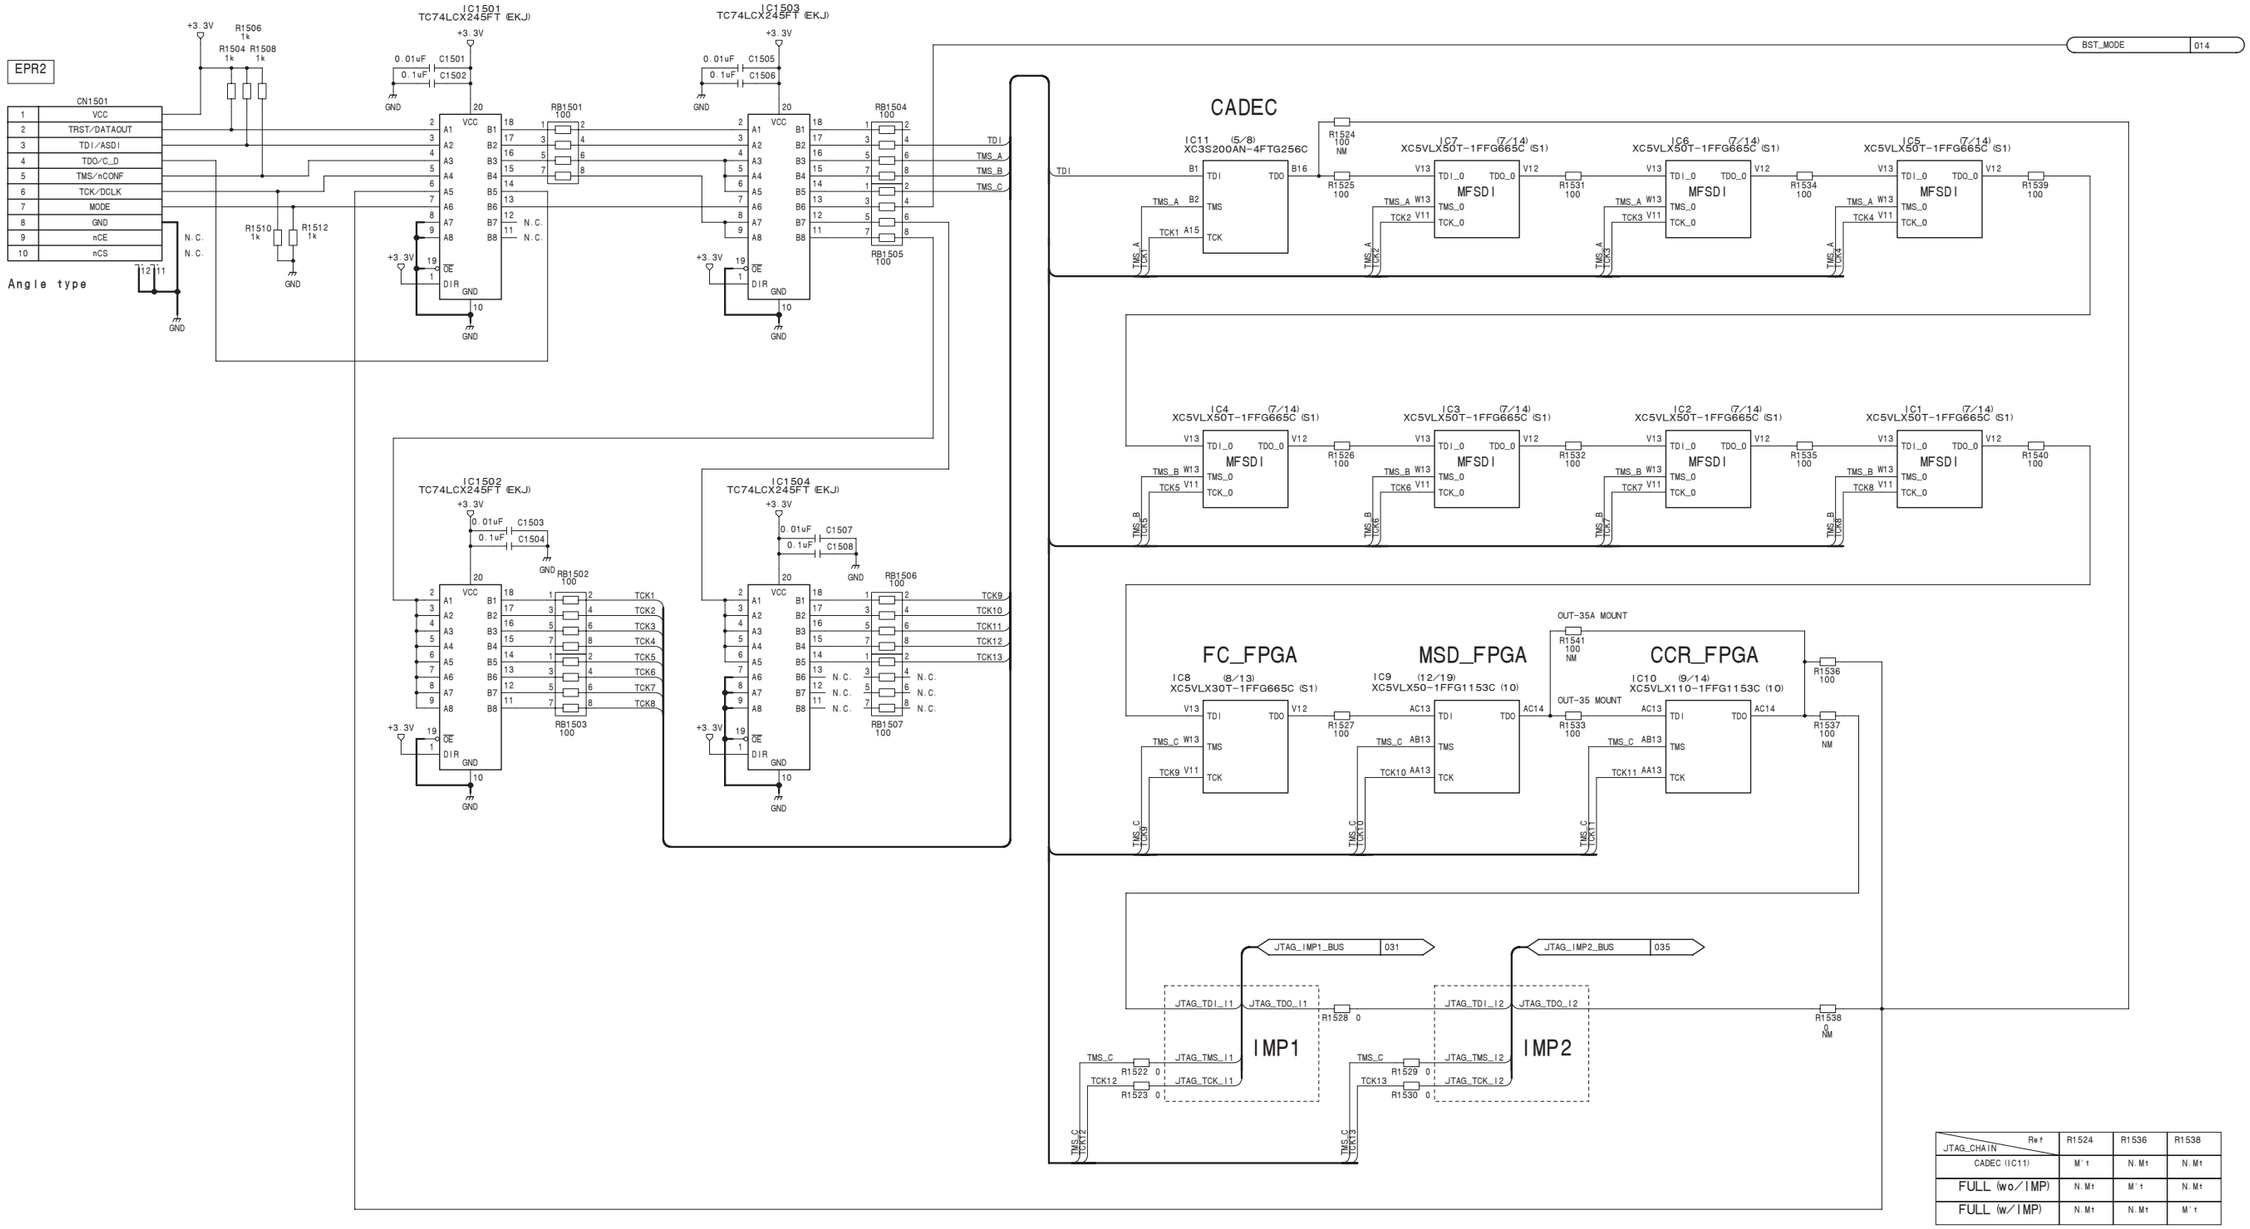

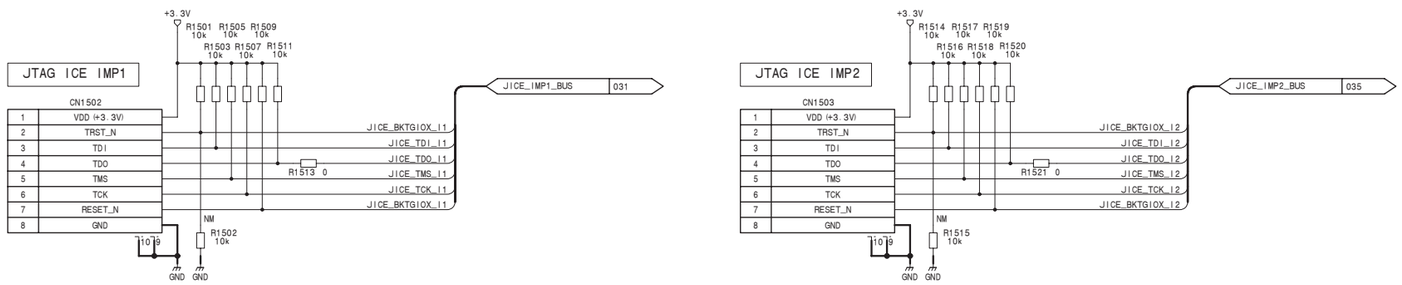

JTAG_CHAIN \ Ref	R1524	R1536	R1538
CADEC (IC11)	M*t	N.Mt	N.Mt
FULL (wo/IMP)	N.Mt	M*t	N.Mt
FULL (w/IMP)	N.Mt	N.Mt	M*t

OUT-35 (15/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_15

OUT-35 (16/45)
SUFFIX: -12

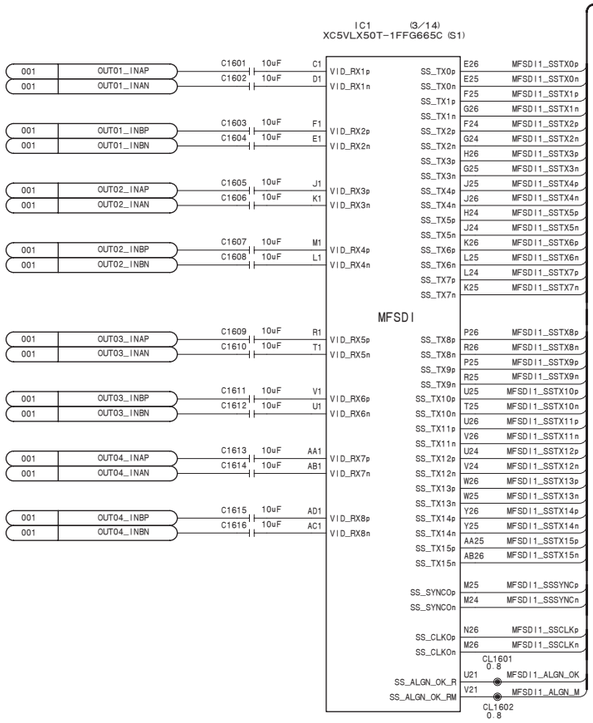

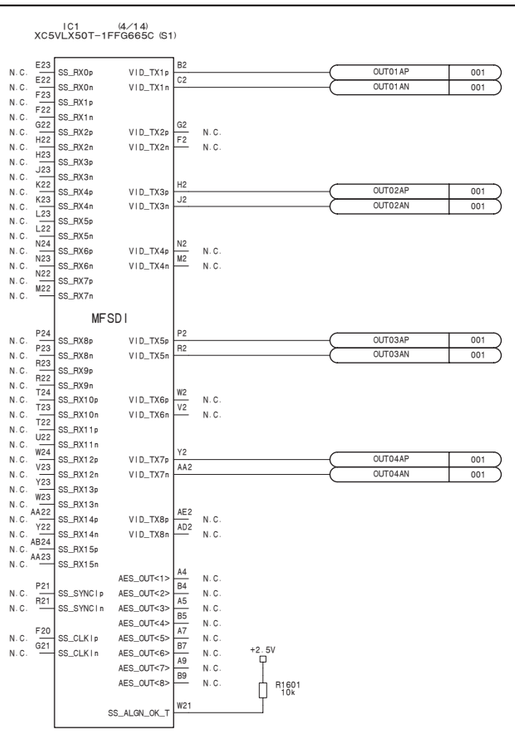

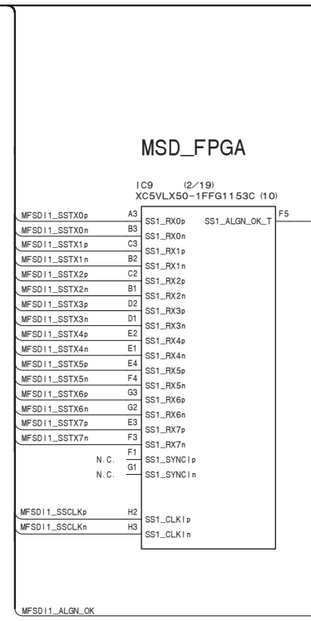

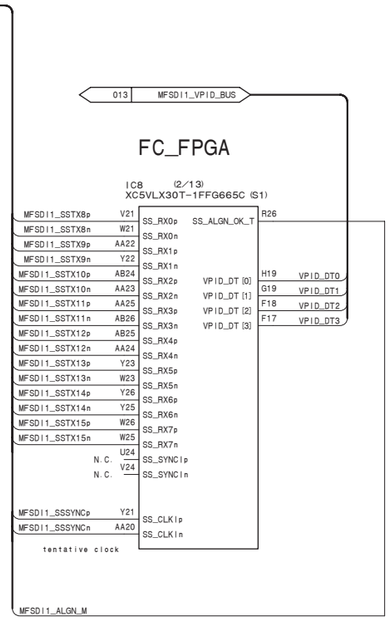

RIGHT

OUT1, 2, 3, 4, 5, 6, 7, 8

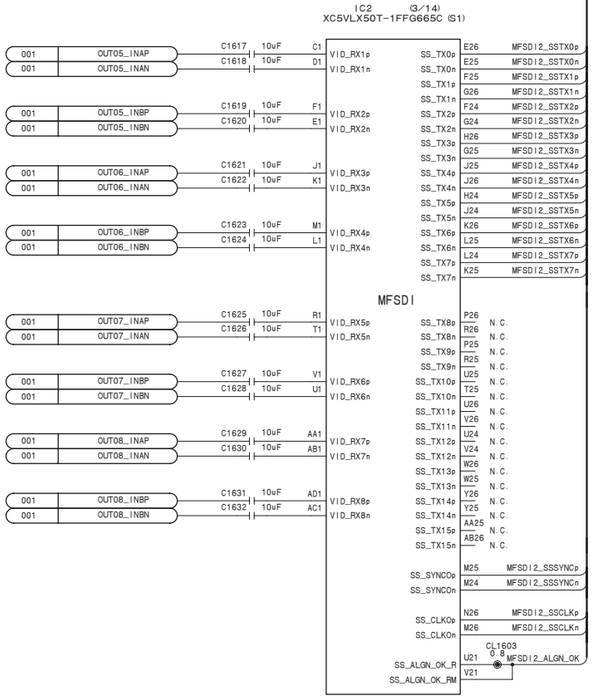

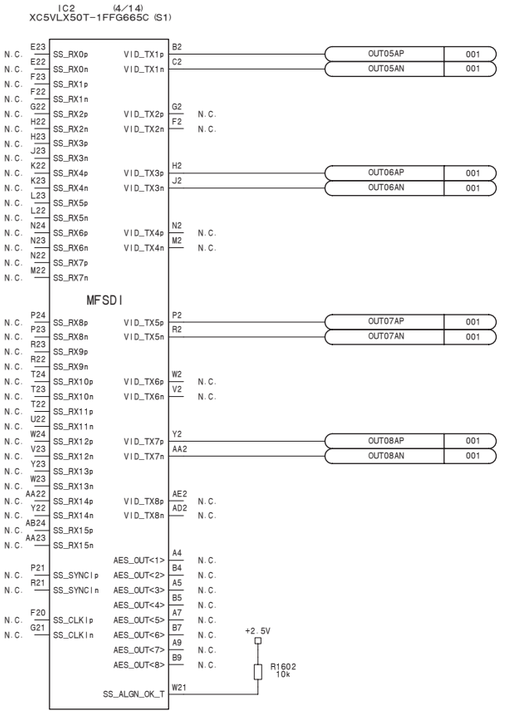

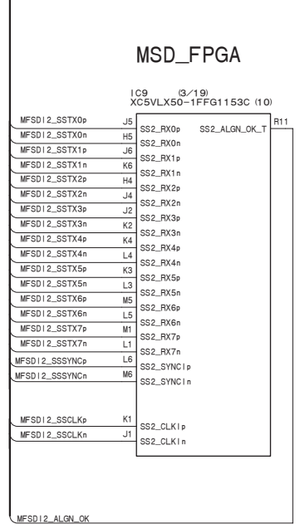

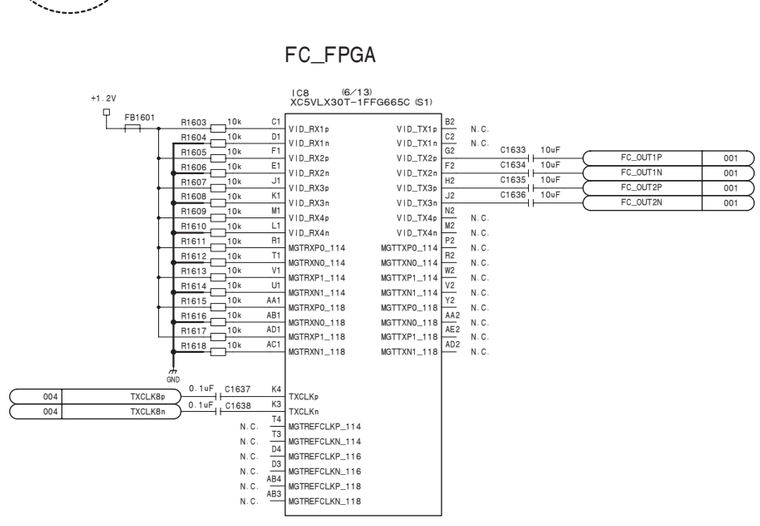

OUT-35 (16/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_16

4-250

OUT-35 (17/45)
SUFFIX: -12

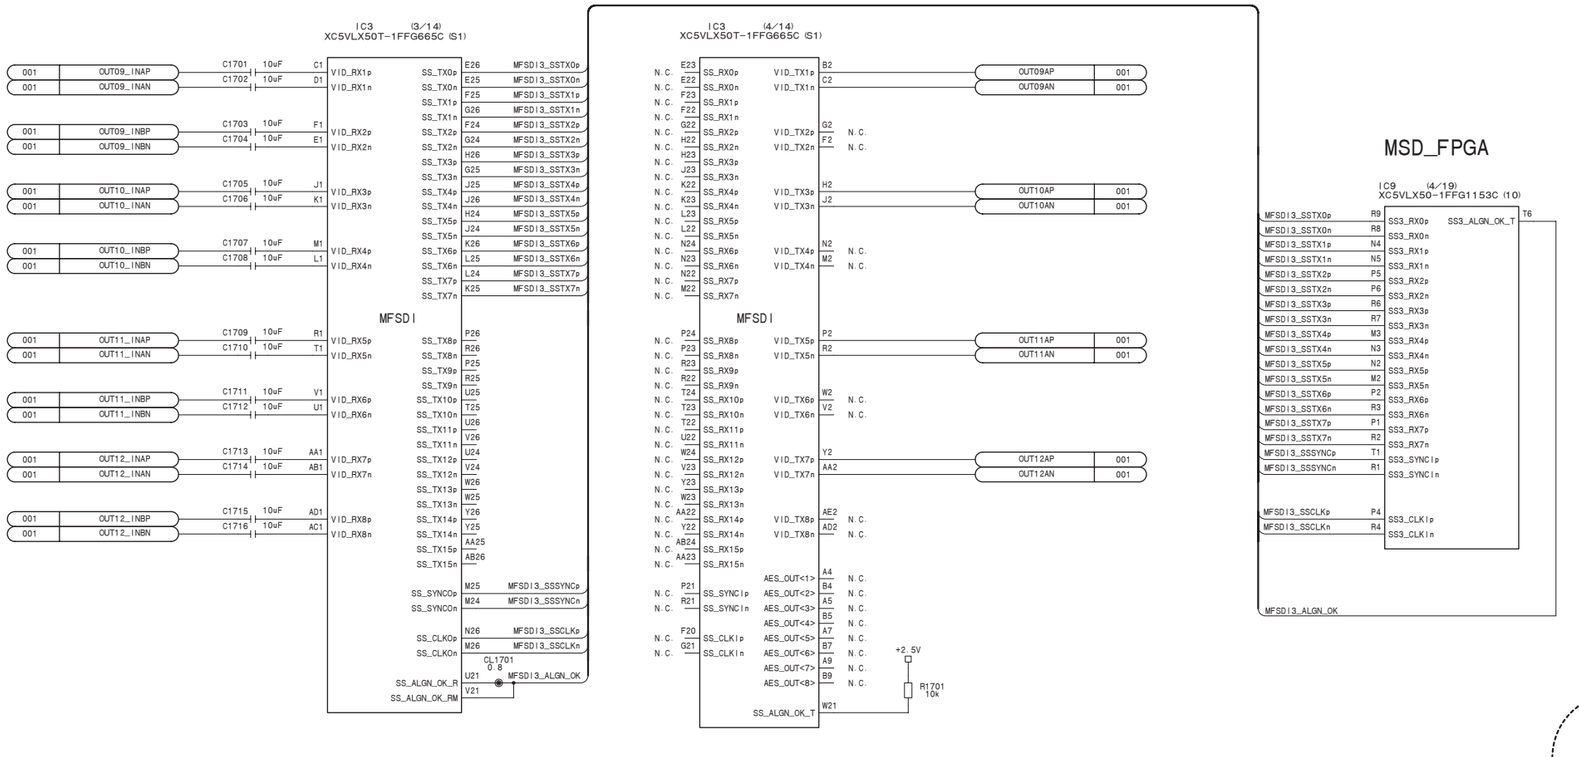

CEN TER

OUT9, 10, 11, 12,
OUT13, 14, 15, 16

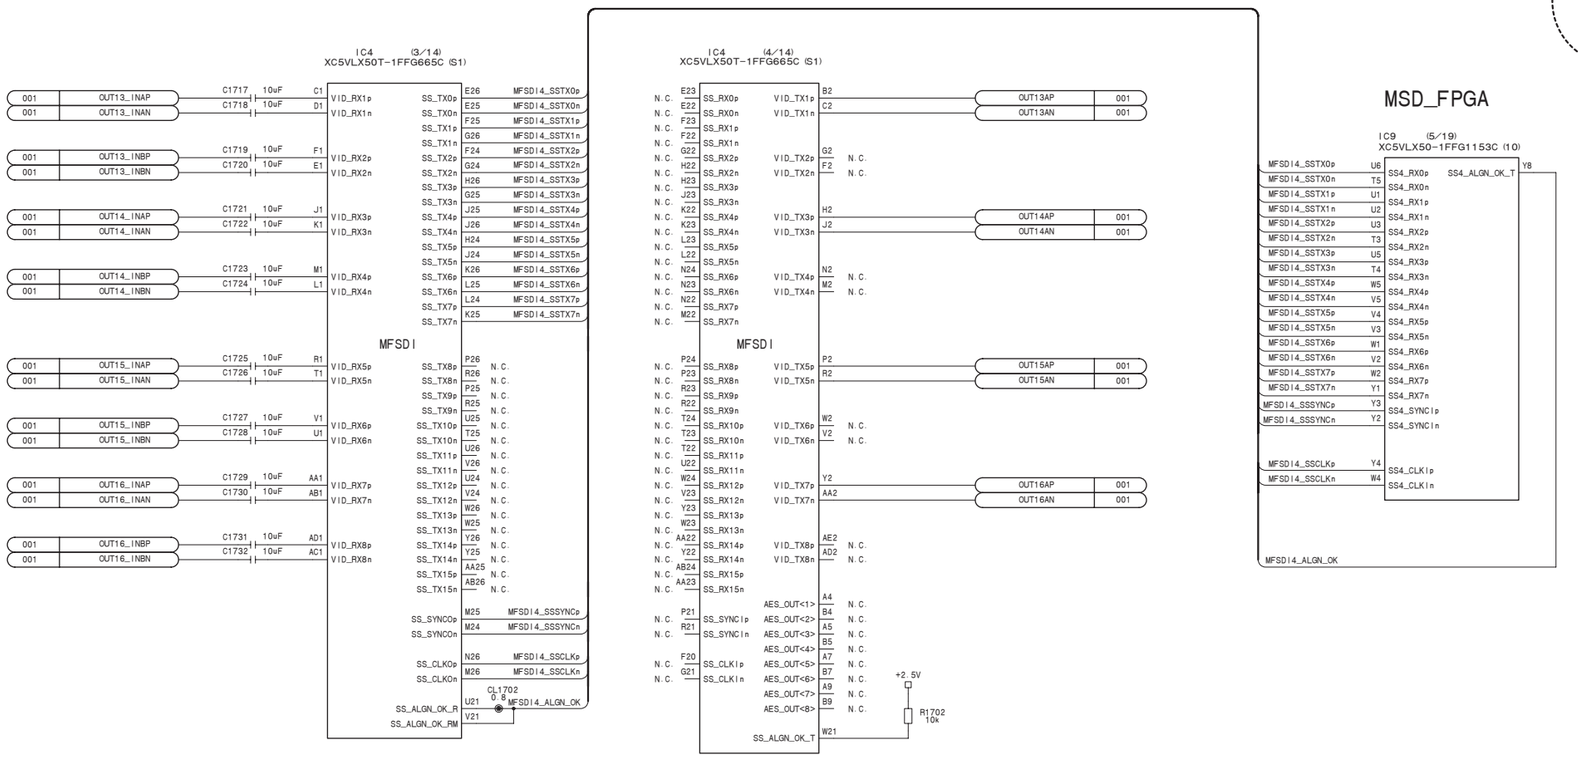

OUT-35 (17/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_17

OUT-35 (18/45)
SUFFIX: -12

CEN
TER

OUT17, 18, 19, 20, MSD_OUT

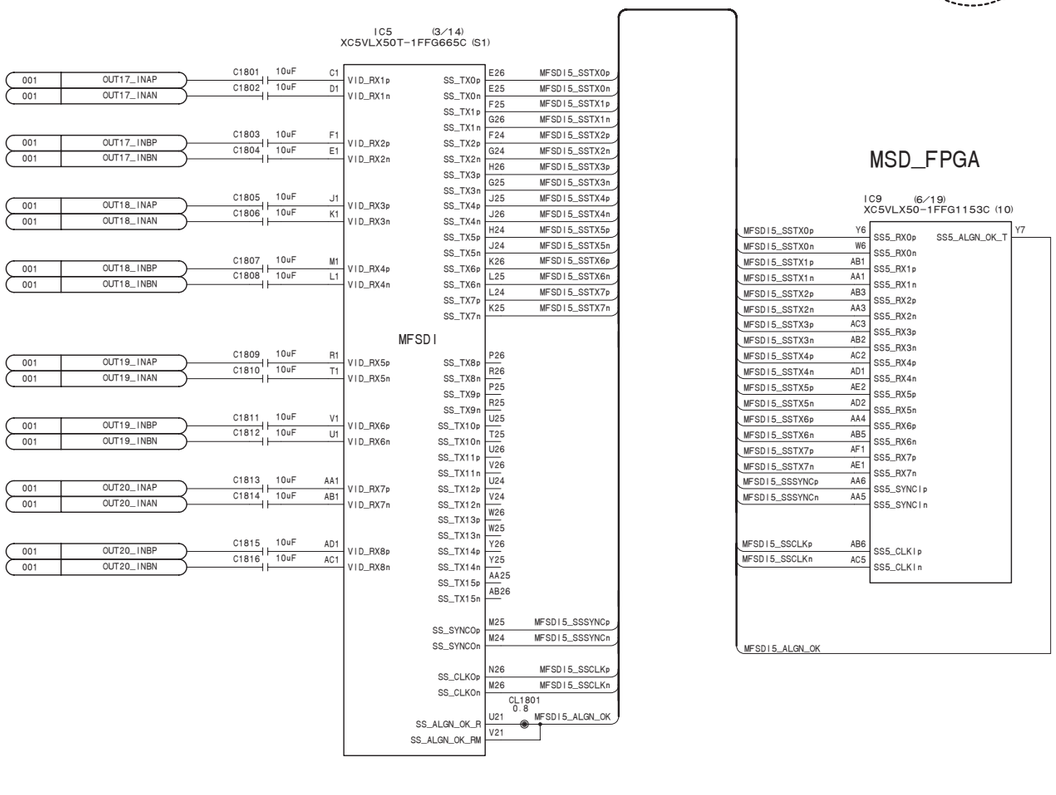

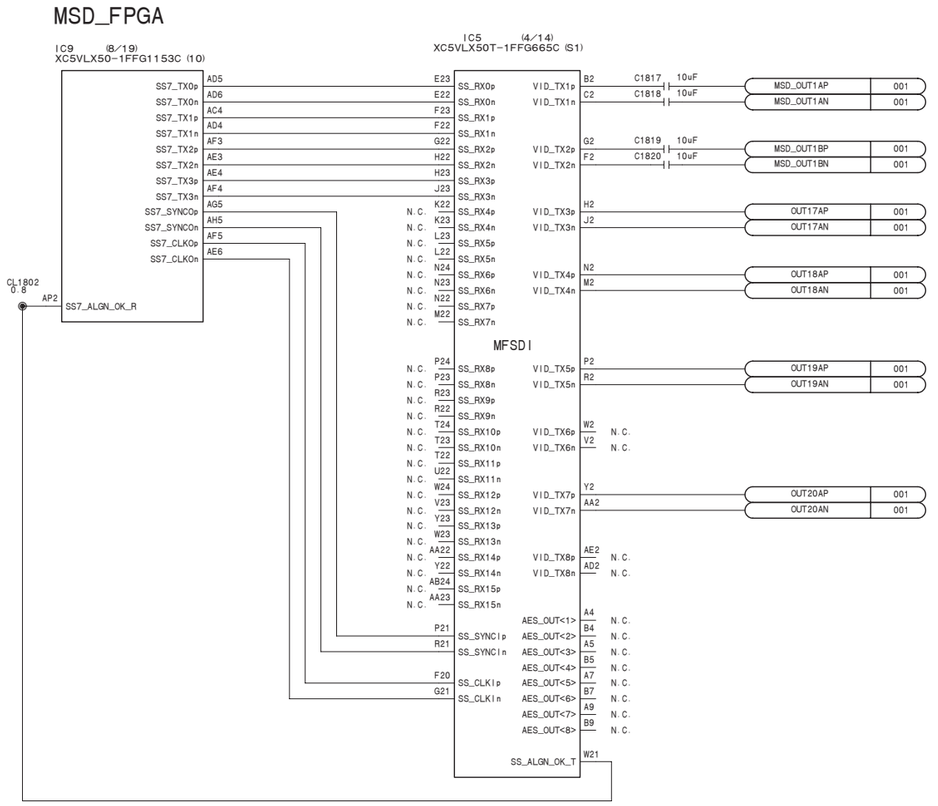

OUT-35 (18/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_18

4-252

OUT-35 (19/45)

SUFFIX: -12

OUT-35 (19/45)

SUFFIX: -12

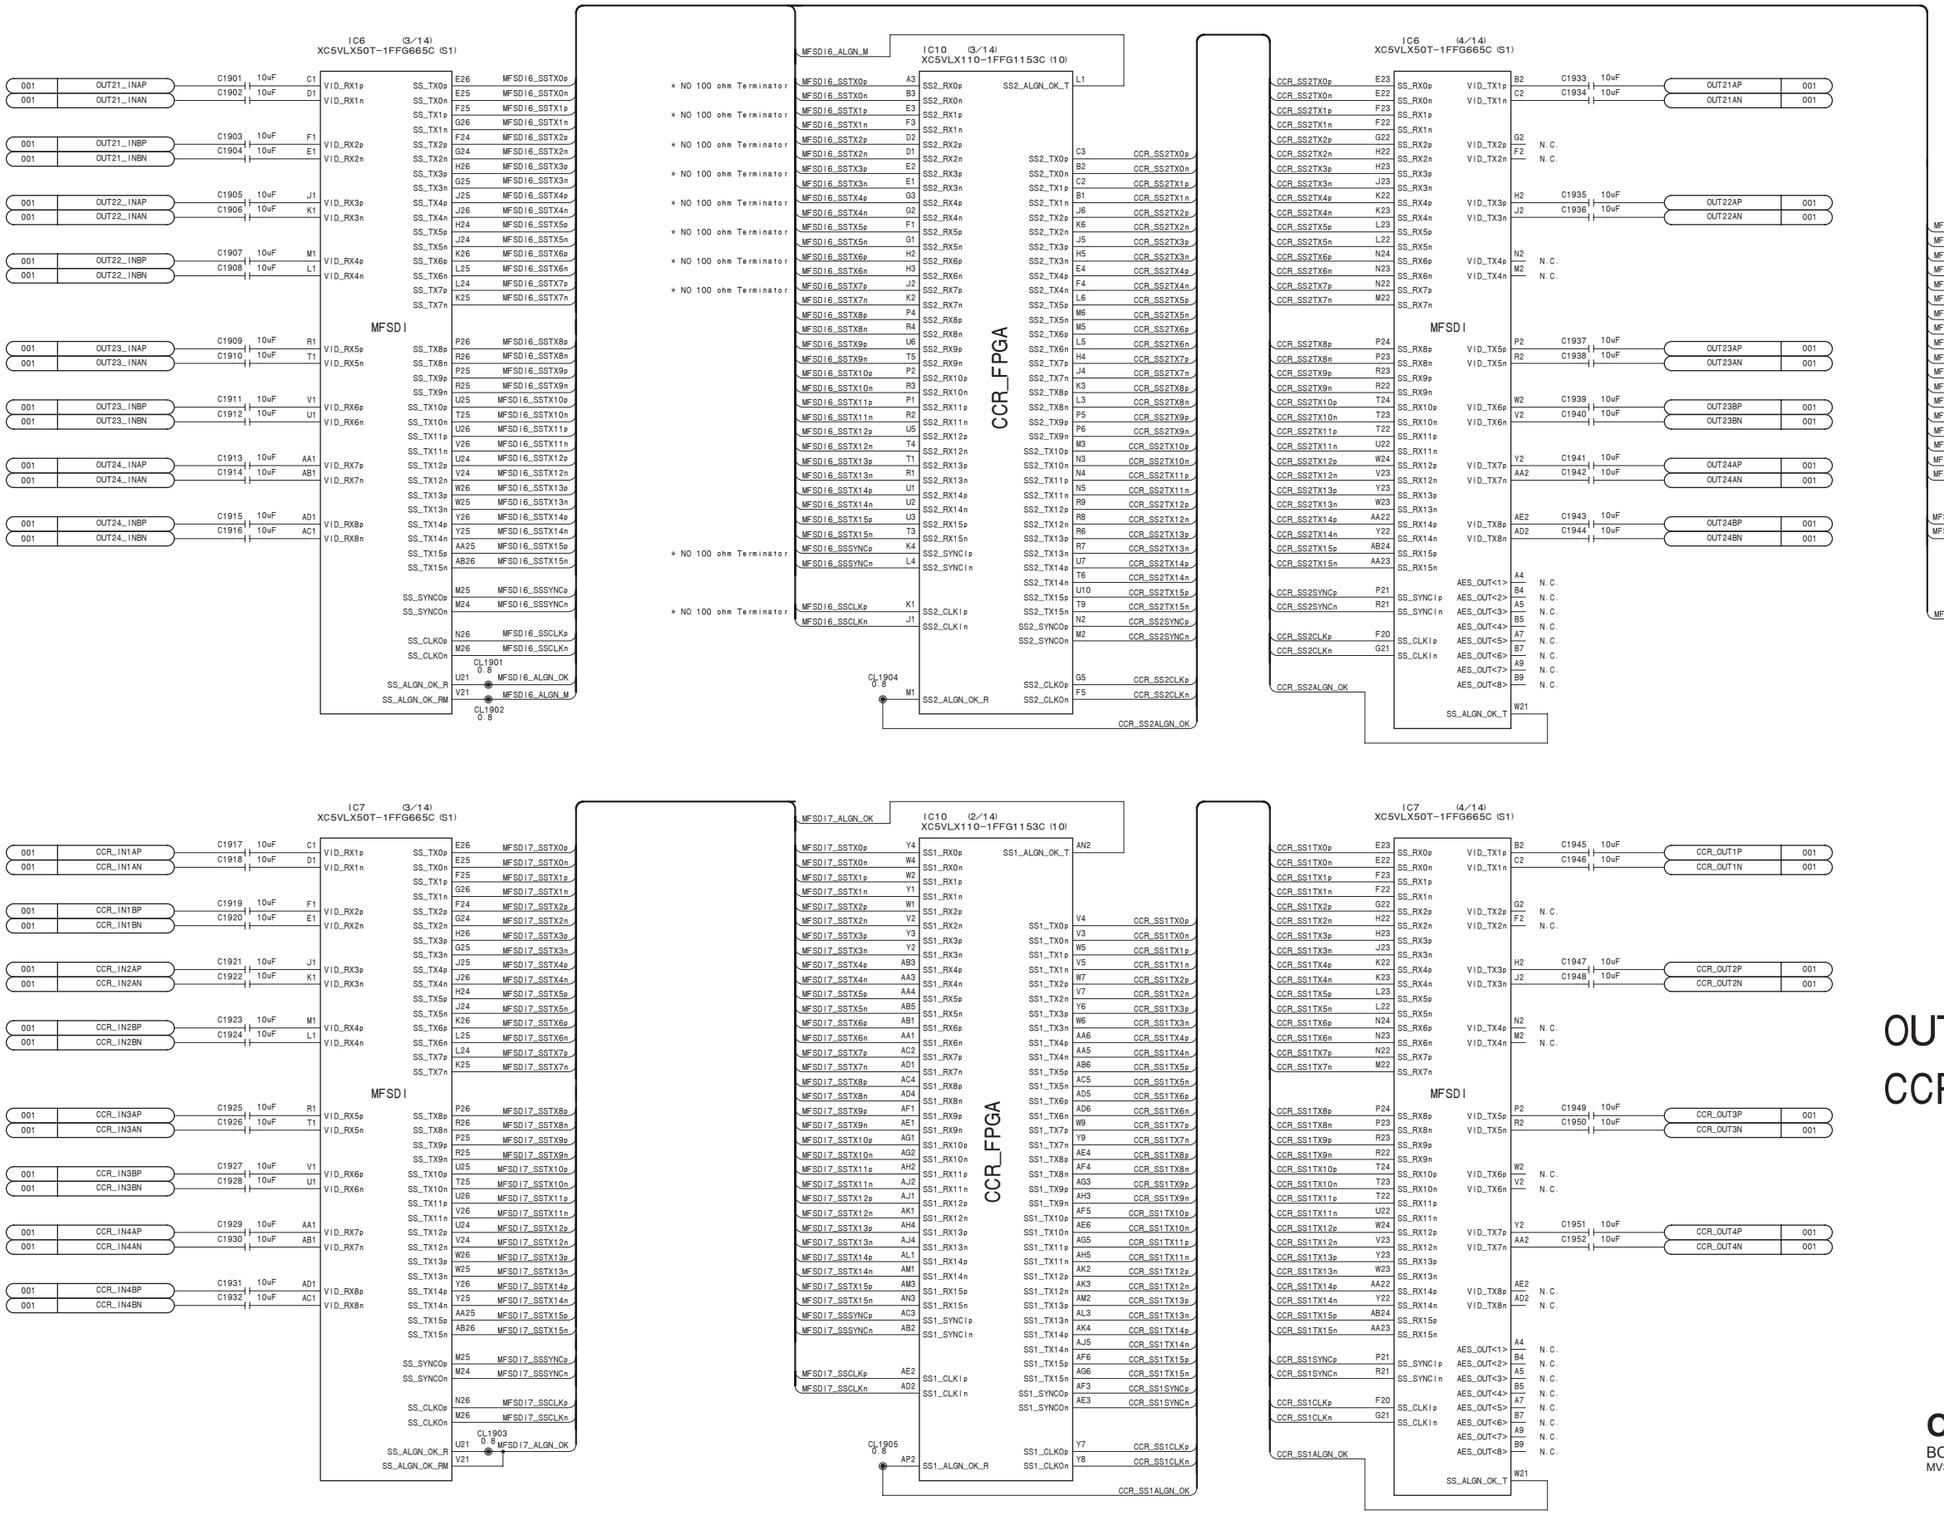

OUT-35 (19/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_19

OUT-35 (20/45)
SUFFIX: -12

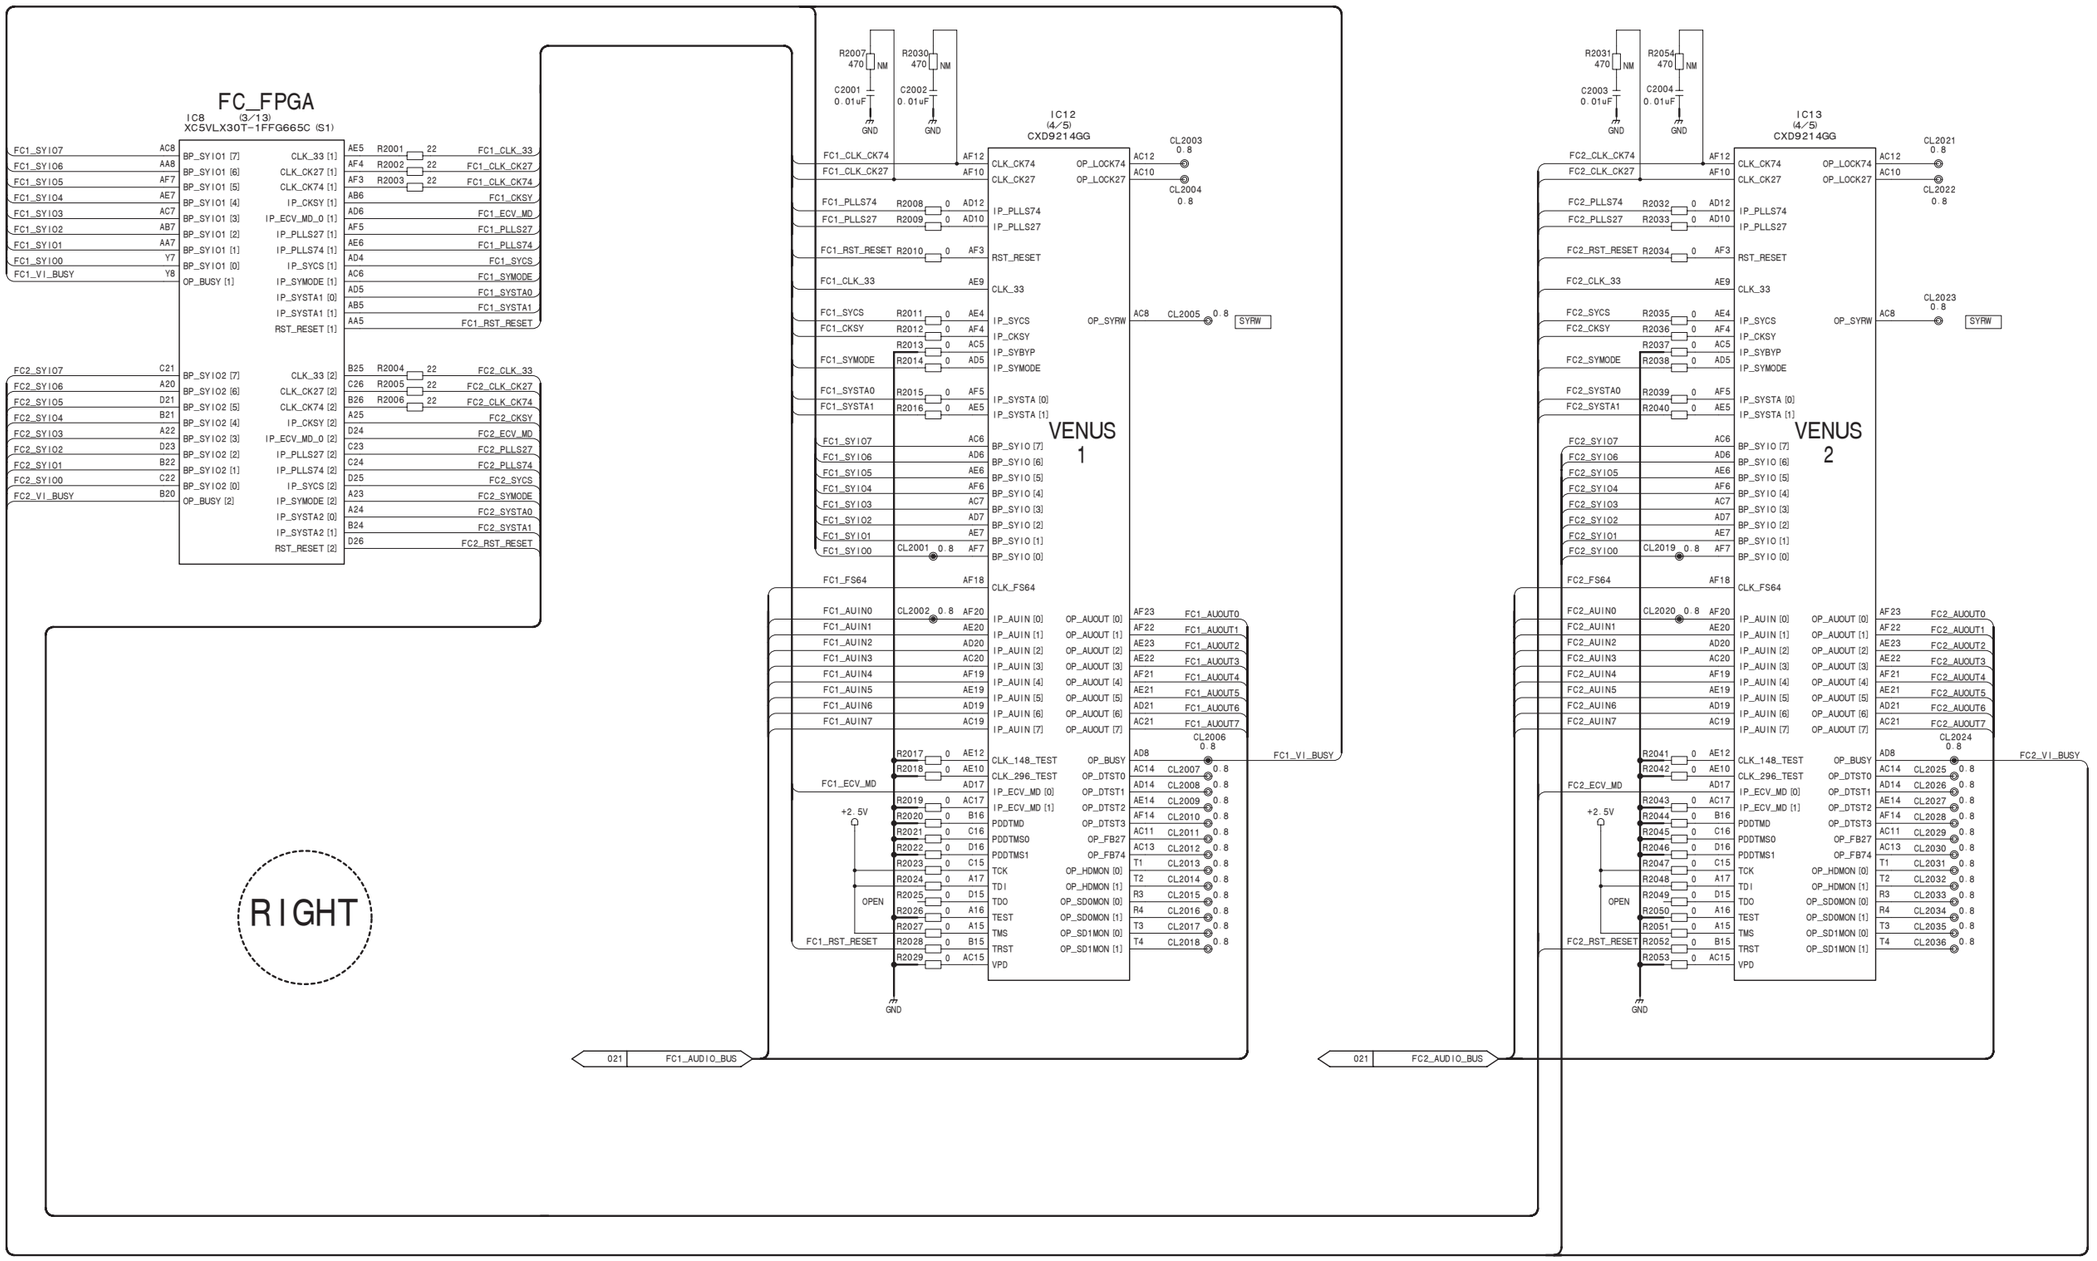

OUT-35 (20/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_20

OUT-35 (21/45)
SUFFIX: -12

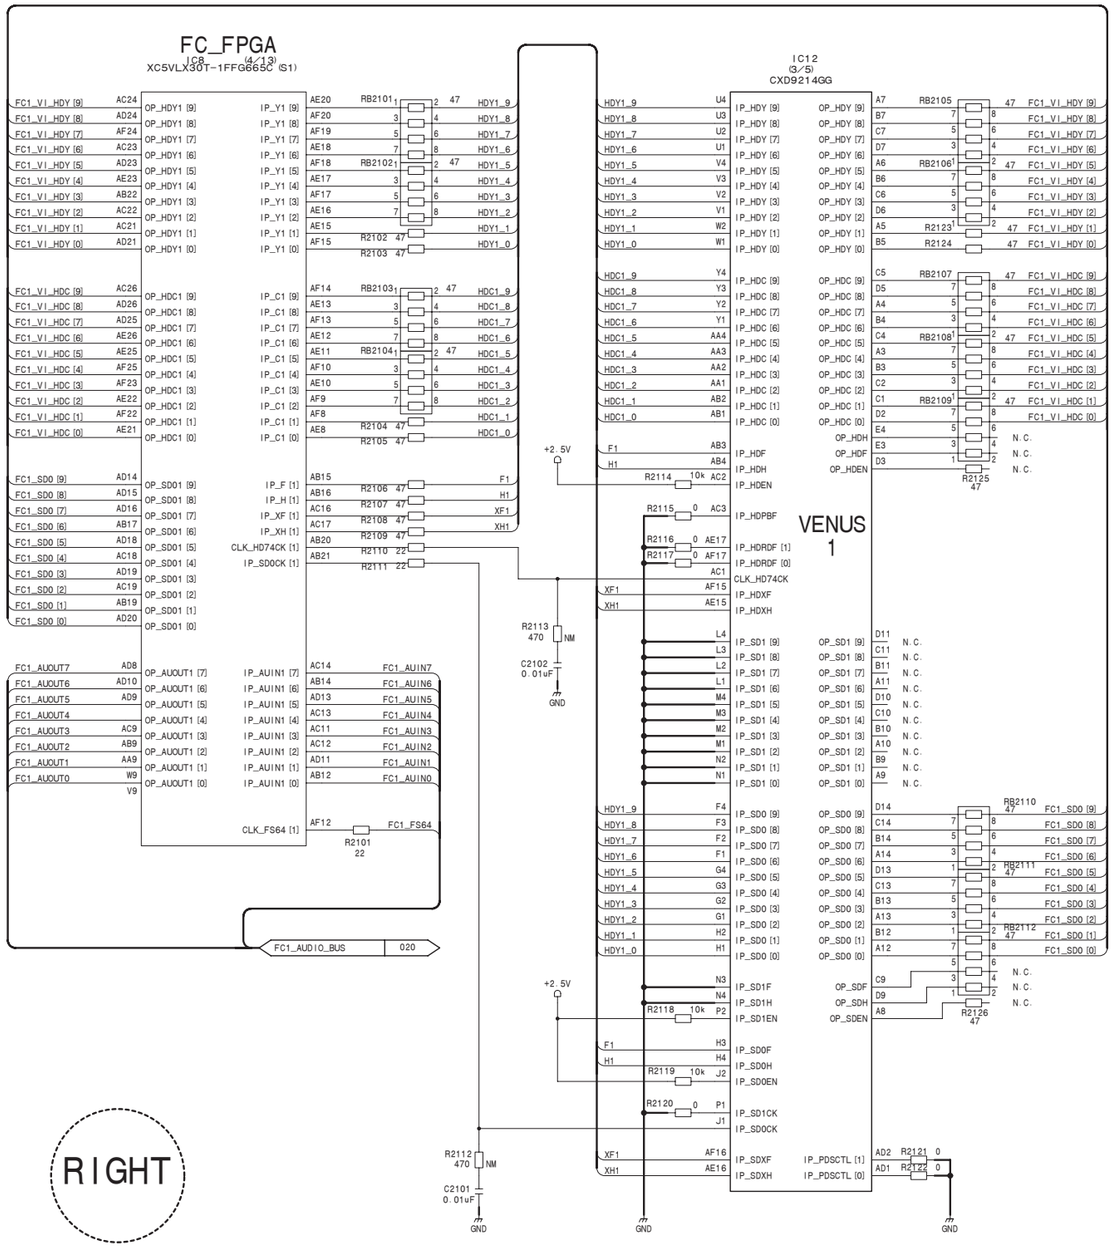

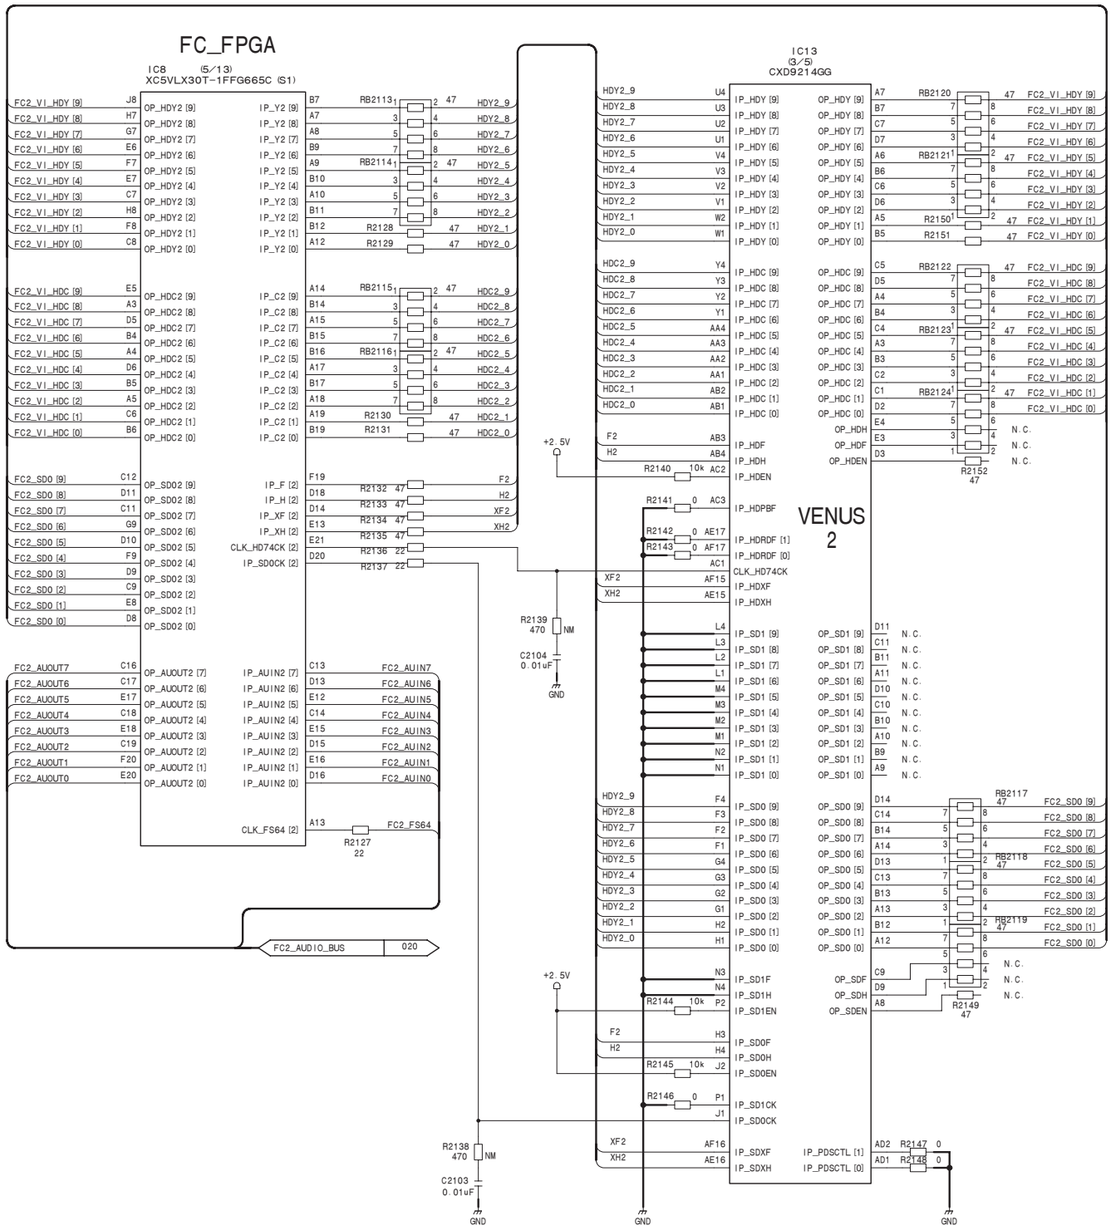

OUT-35 (21/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_21

OUT-35 (22/45)
SUFFIX: -12

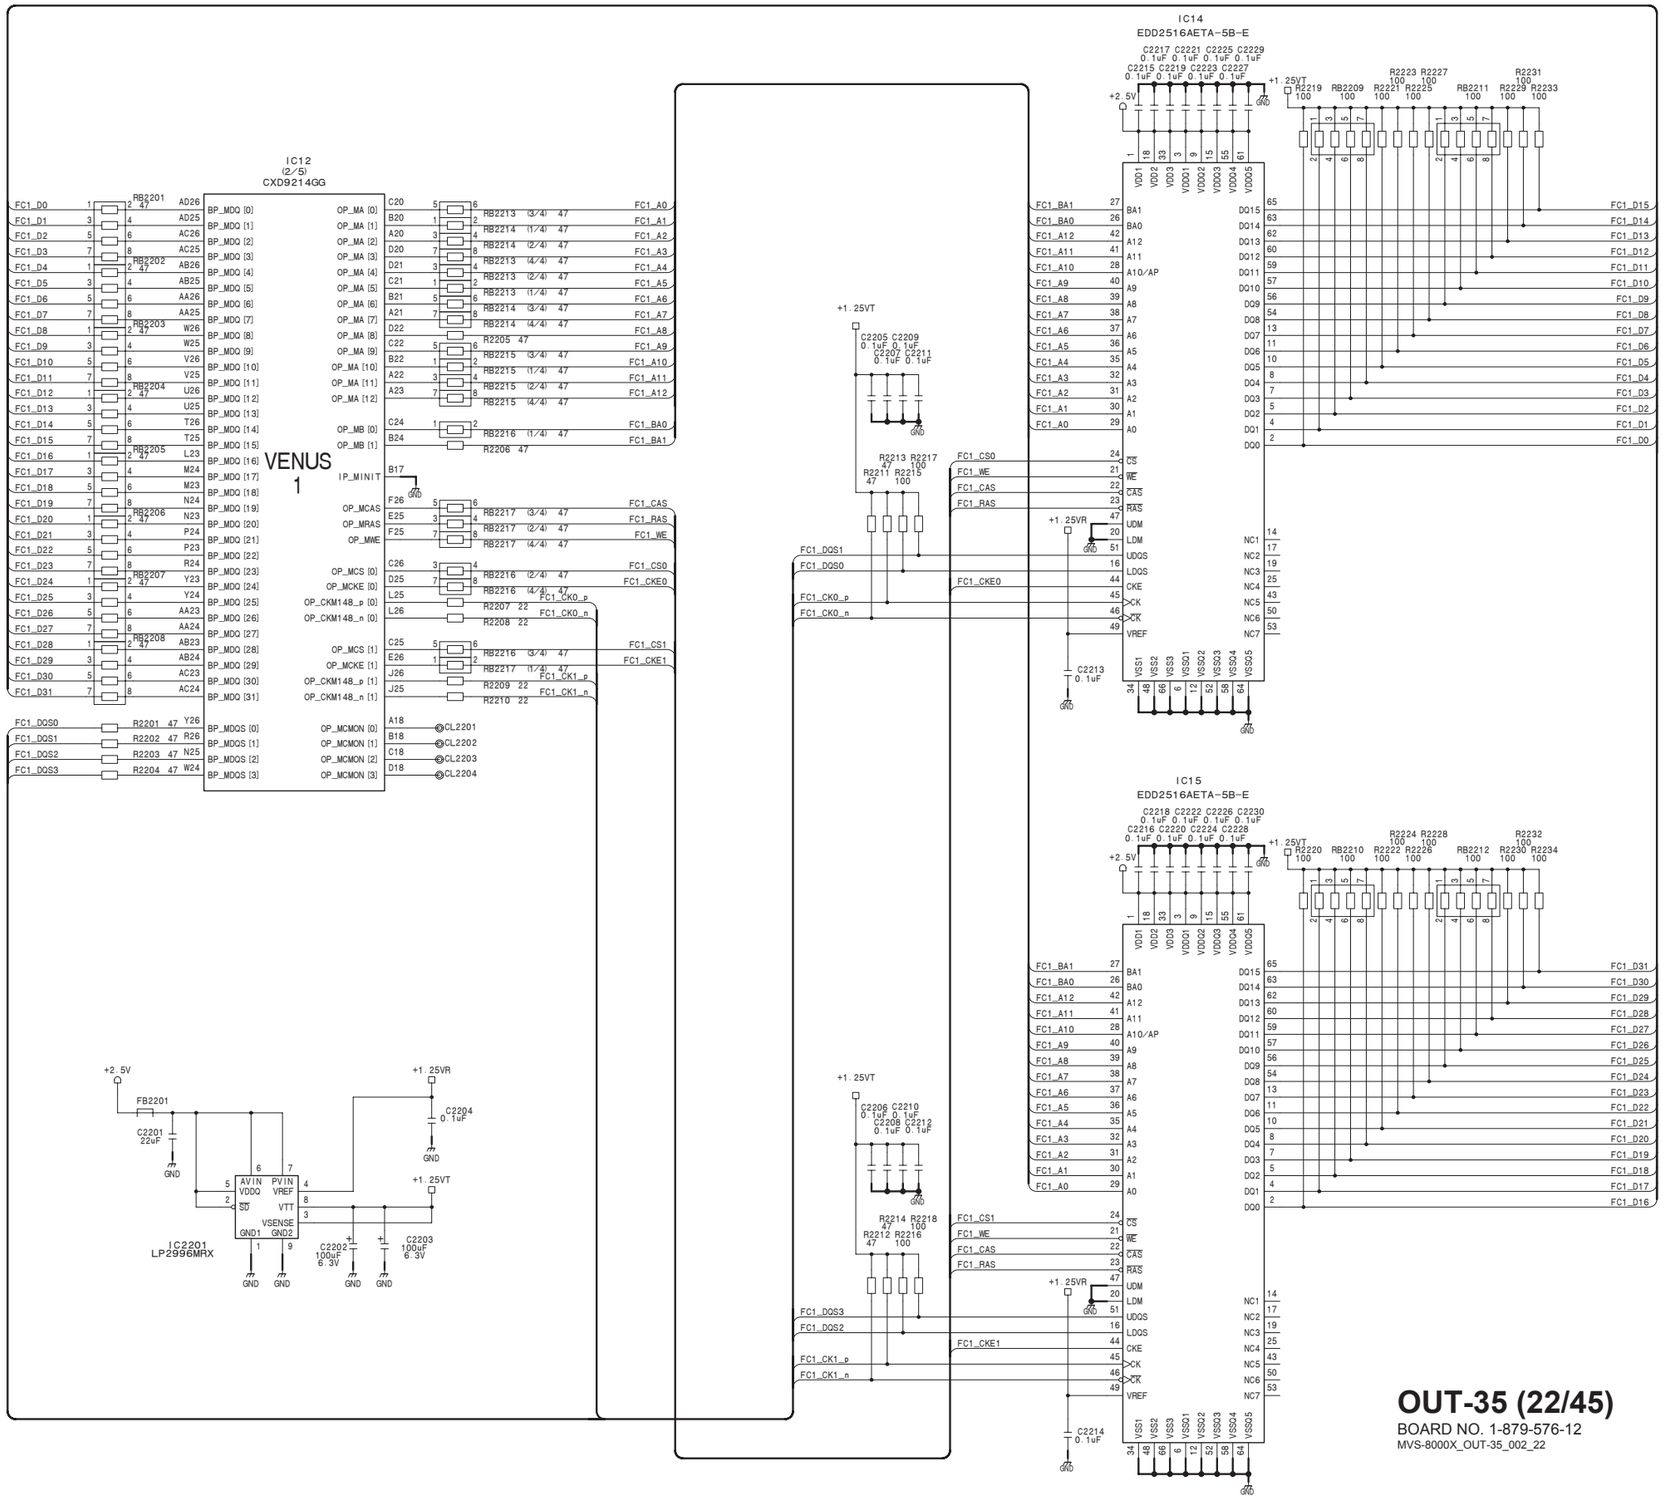

RIGHT

OUT-35 (22/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_22

4-256

OUT-35 (23/45)
SUFFIX: -12

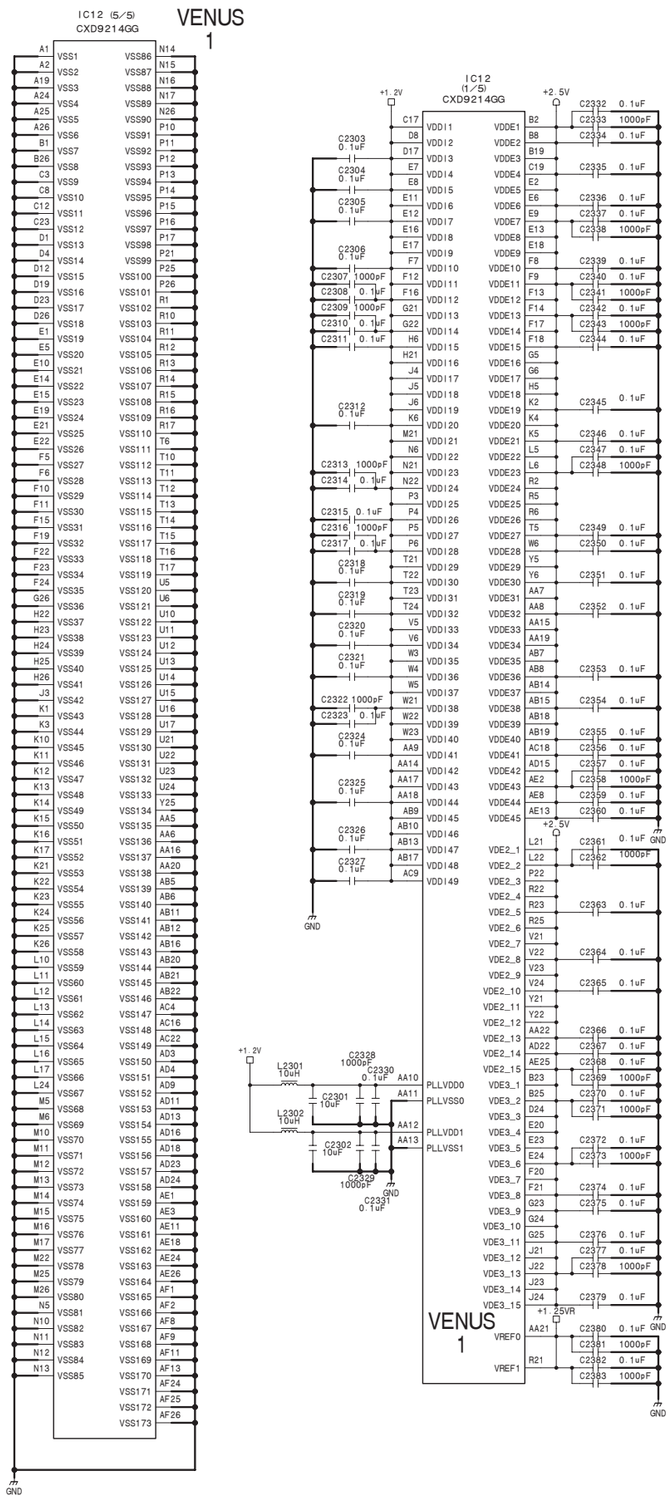

OUT-35 (23/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_23

OUT-35 (24/45)
SUFFIX: -12

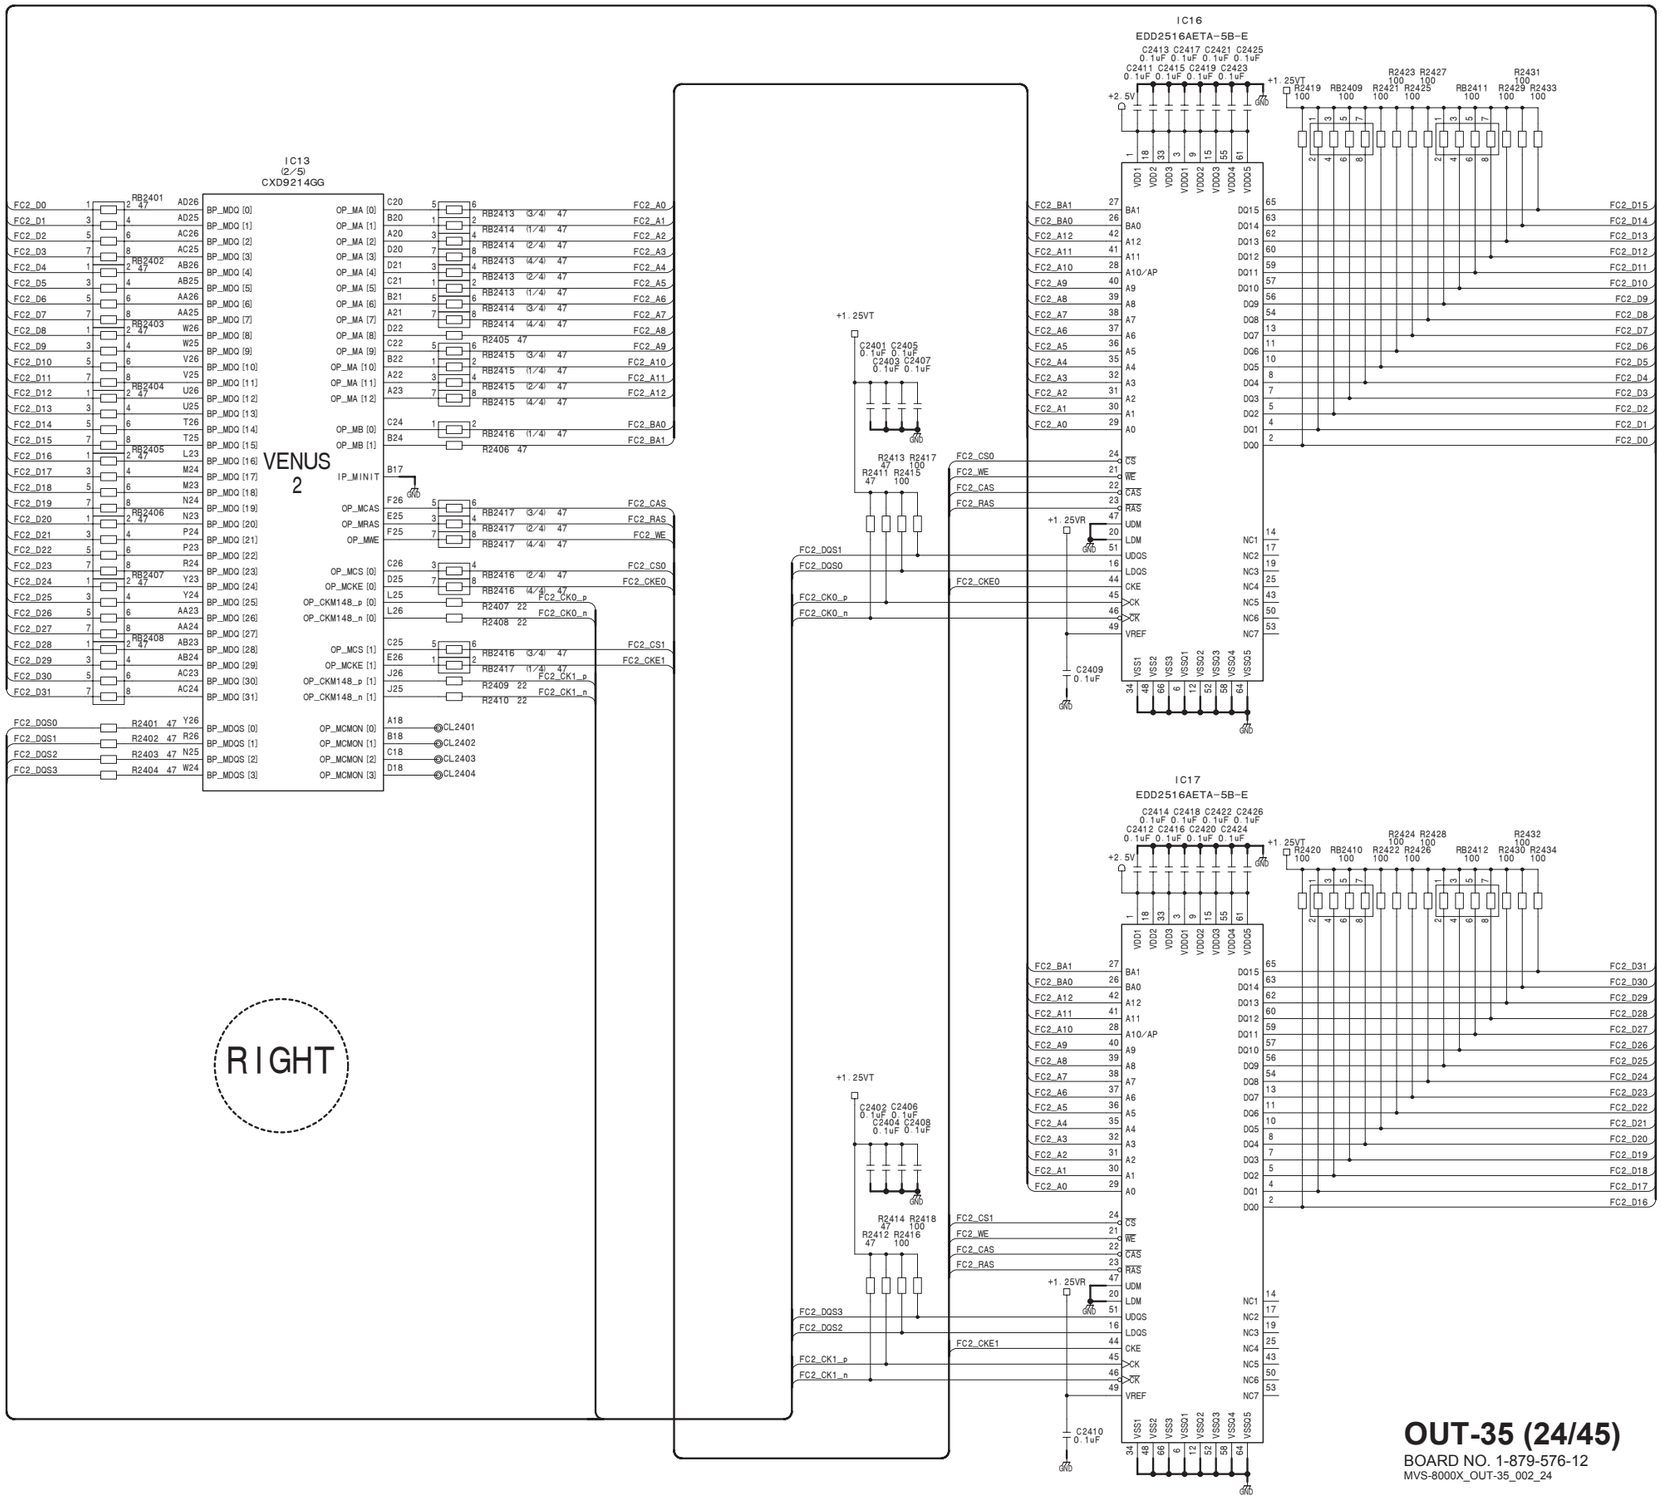

OUT-35 (24/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_24

OUT-35 (25/45)
SUFFIX: -12

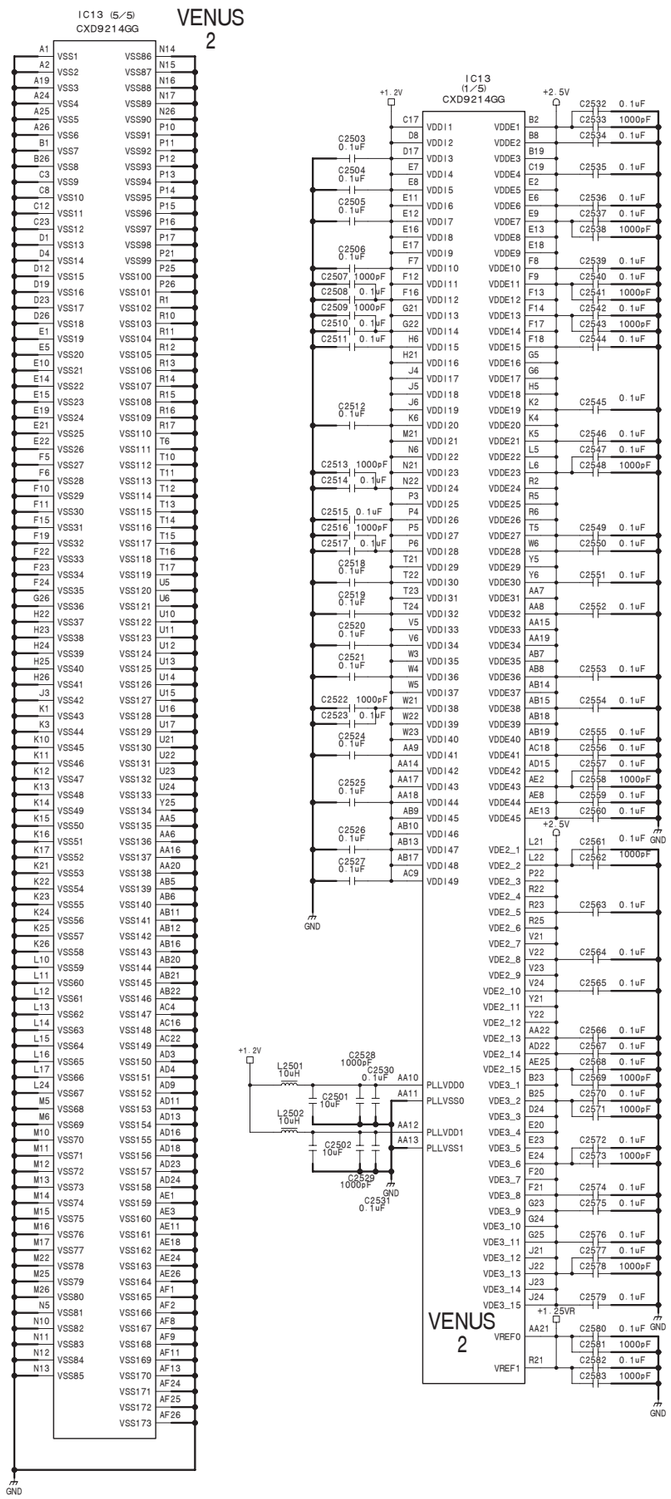

OUT-35 (25/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_25

OUT-35 (26/45)
SUFFIX: -12

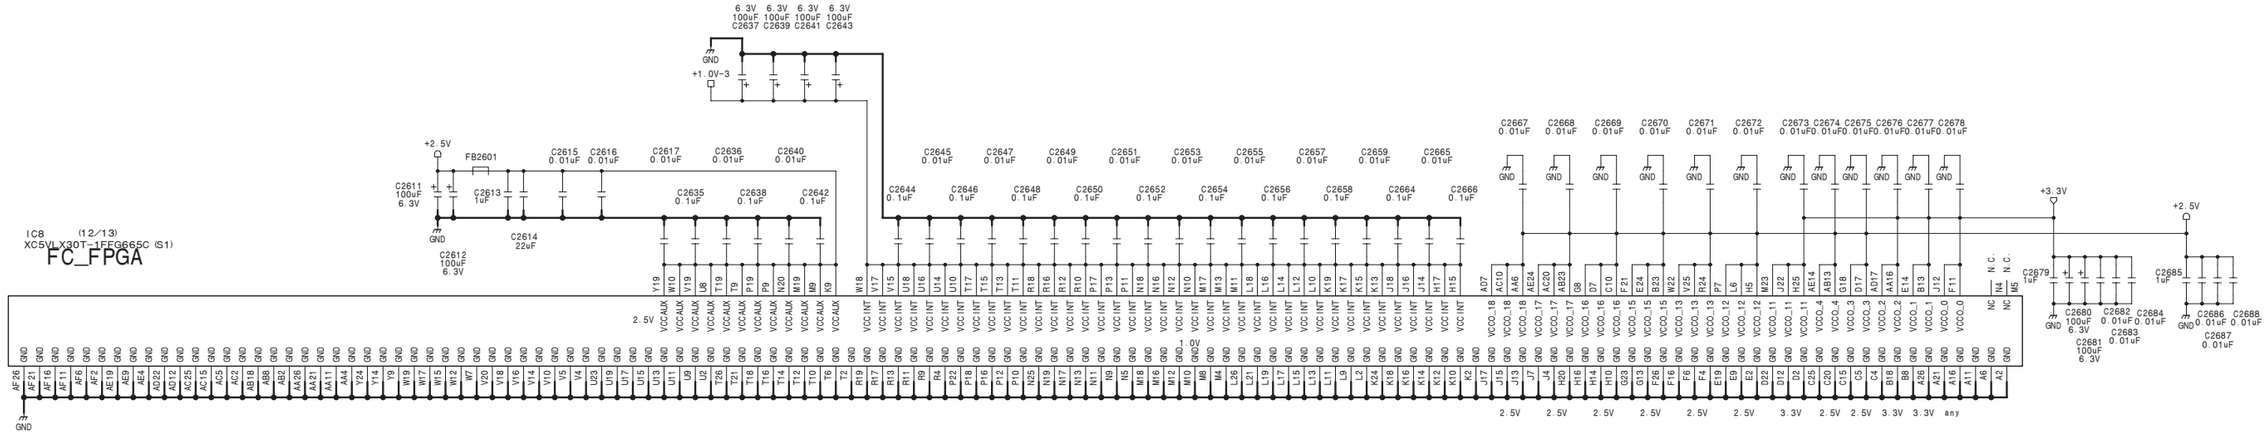

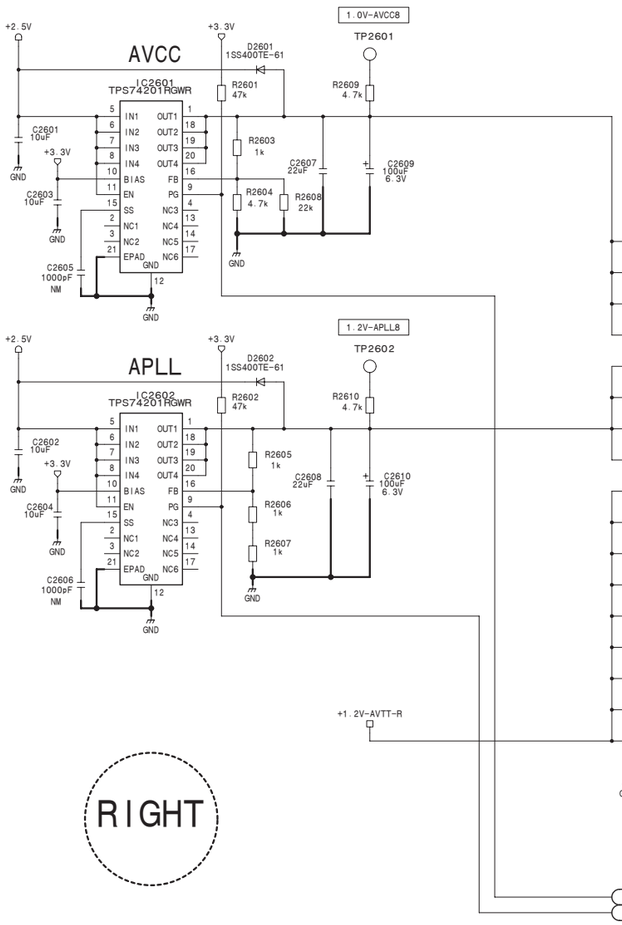

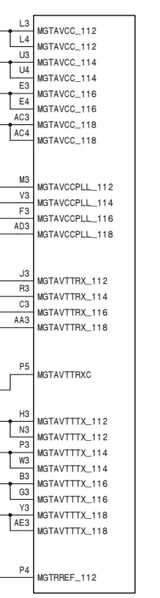

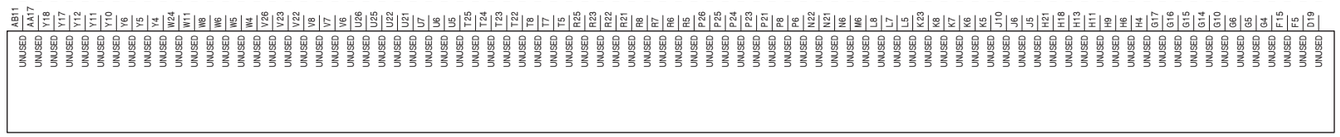

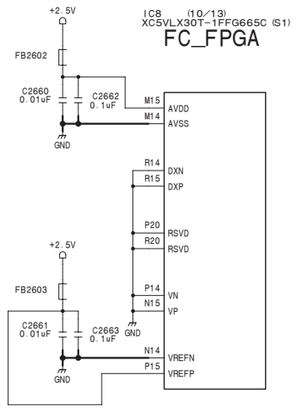

OUT-35 (26/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_26

4-260

OUT-35 (27/45)
SUFFIX: -12

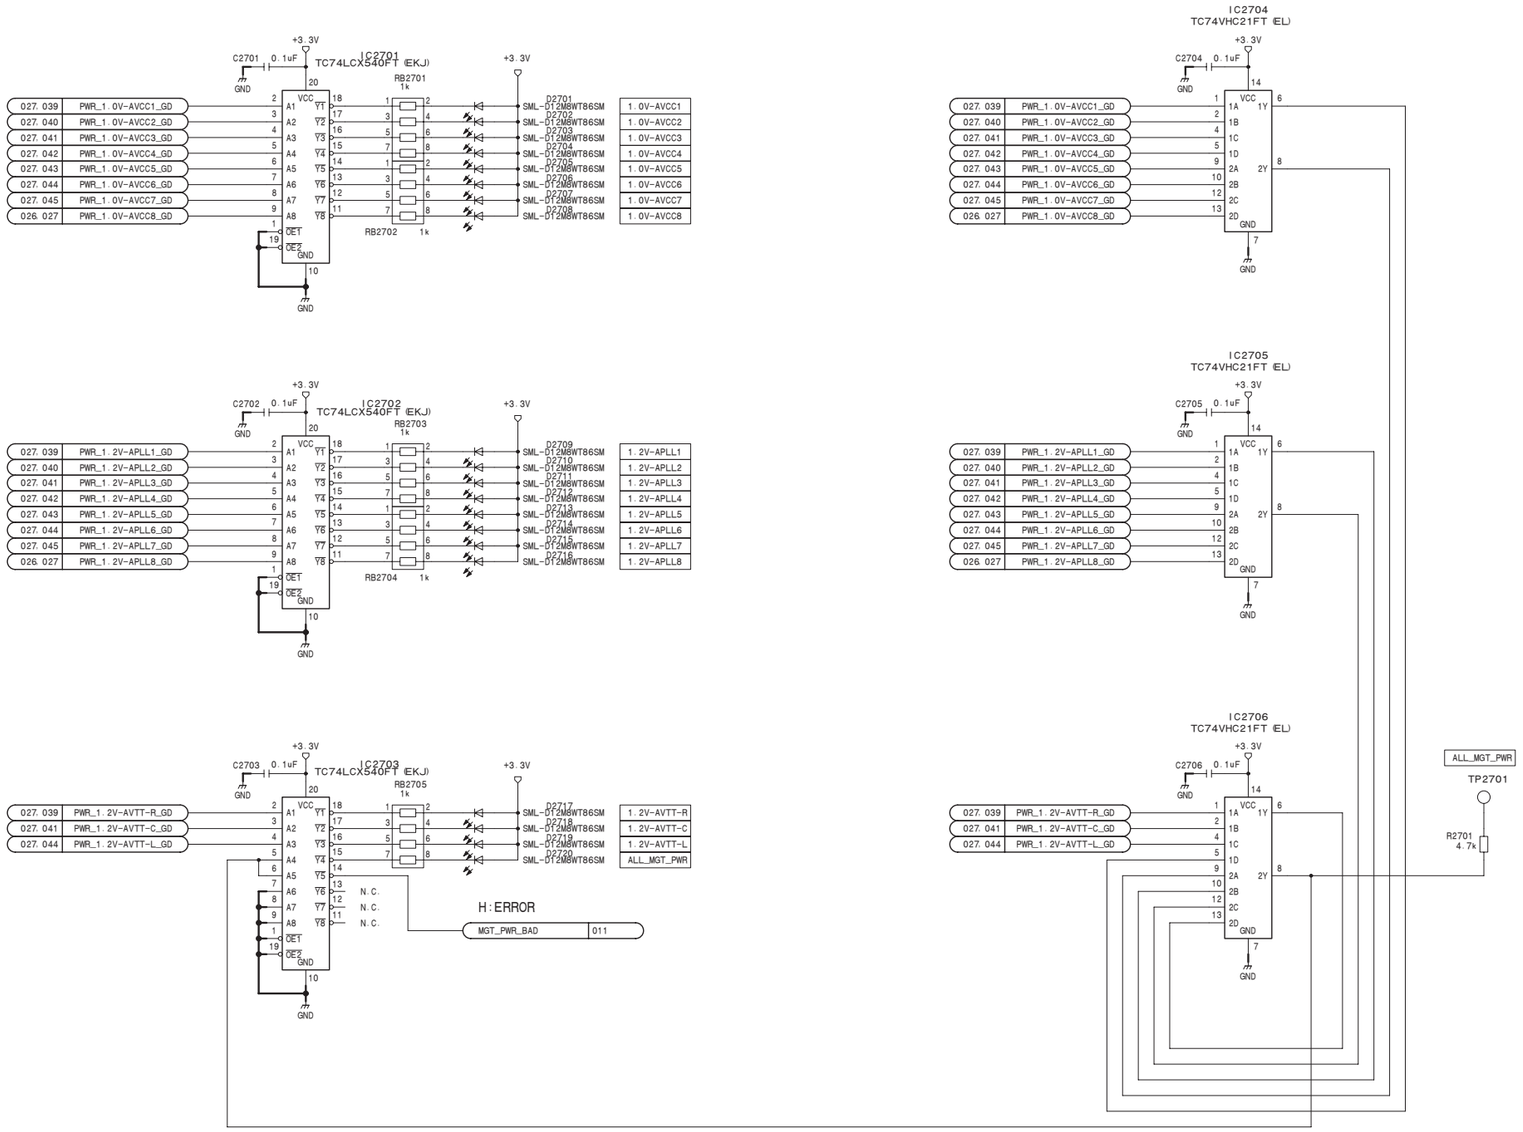

OUT-35 (27/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_27

OUT-35 (28/45)
SUFFIX: -12

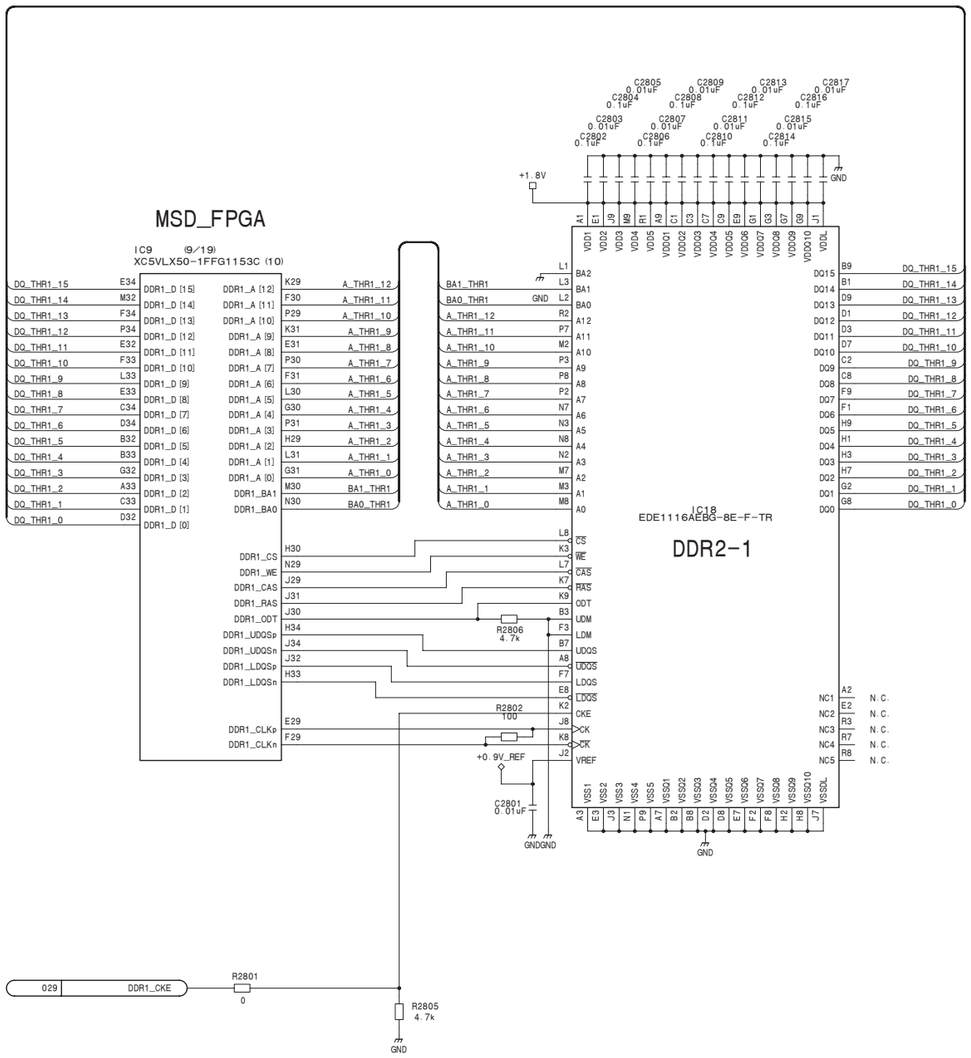

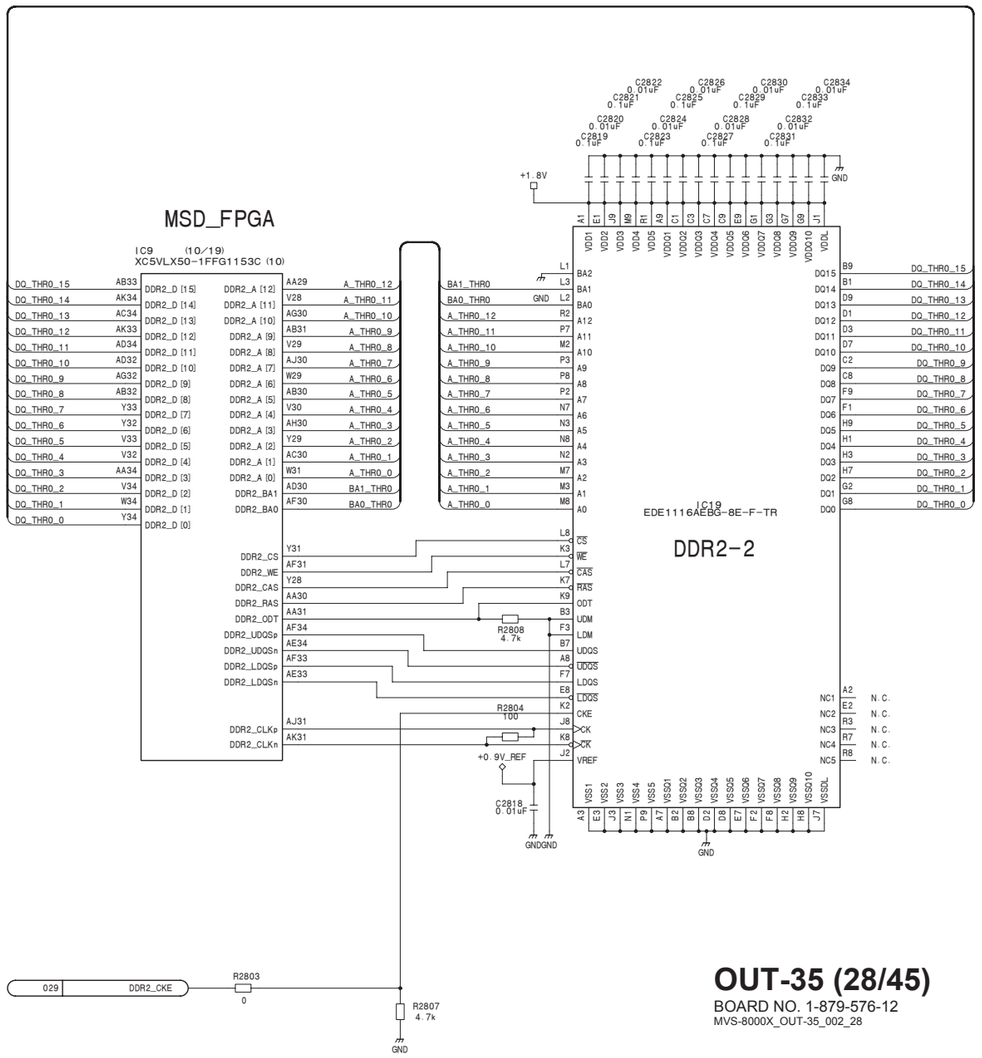

CENTER

OUT-35 (28/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_28

OUT-35 (29/45)

SUFFIX: -12

OUT-35 (29/45)

SUFFIX: -12

MSD_FPGA

IC9 (15/19)

XC5VLX50-1FFG1153C (10)

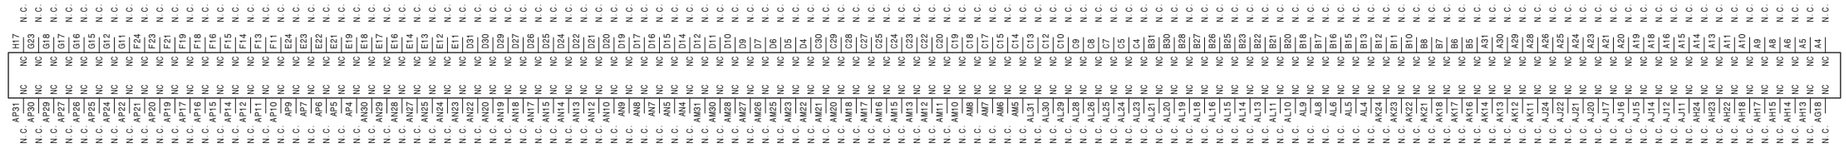

MSD_FPGA

IC9 (19/19)

XC5VLX50-1FFG1153C (10)

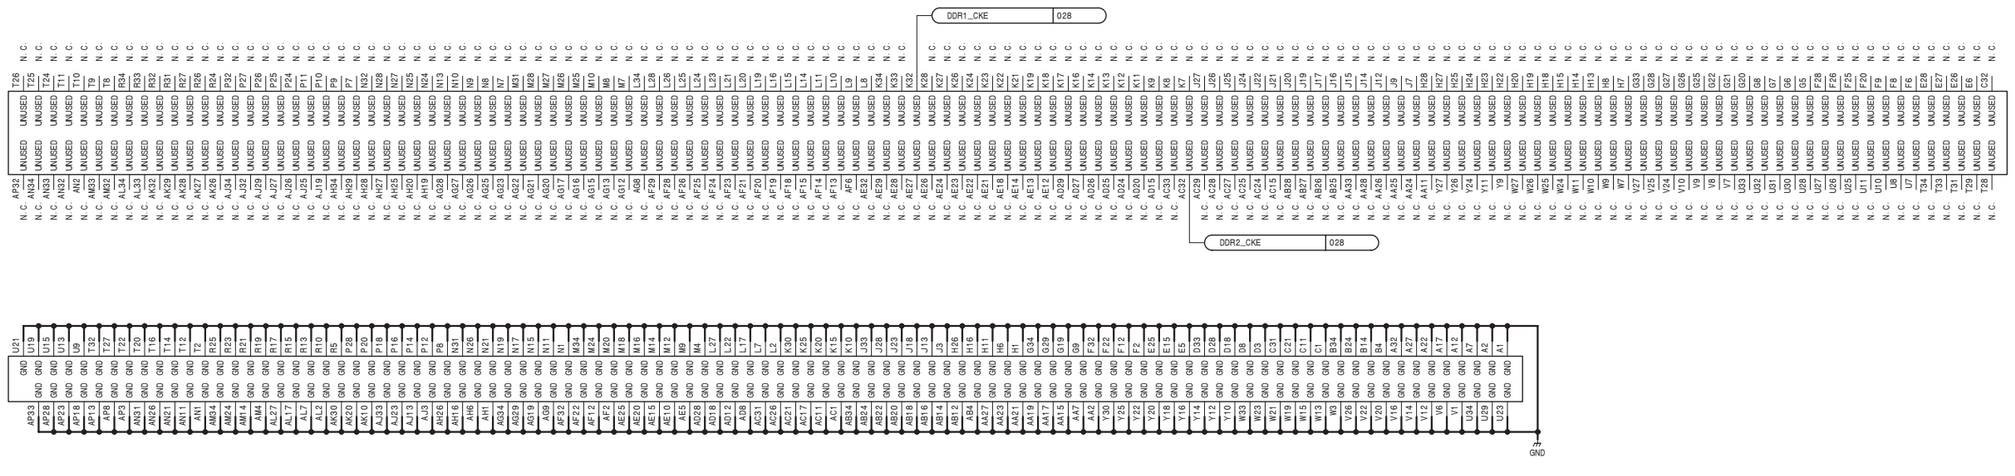

MSD_FPGA

IC9 (17/19)

XC5VLX50-1FFG1153C (10)

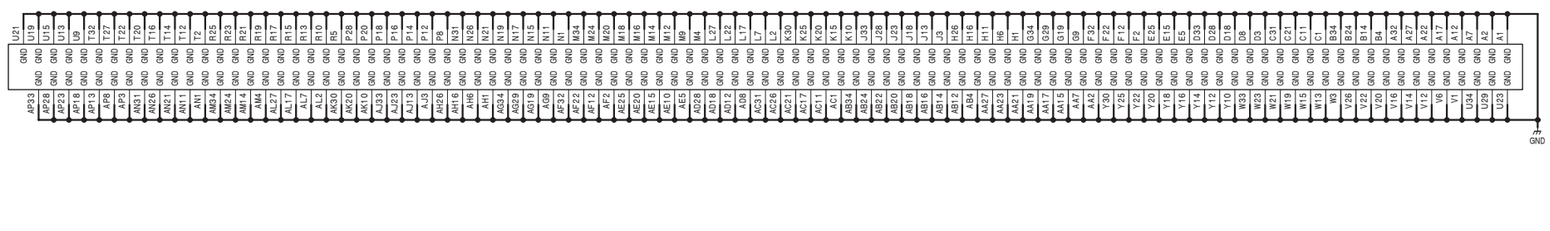

MSD_FPGA

IC9 (16/19)

XC5VLX50-1FFG1153C (10)

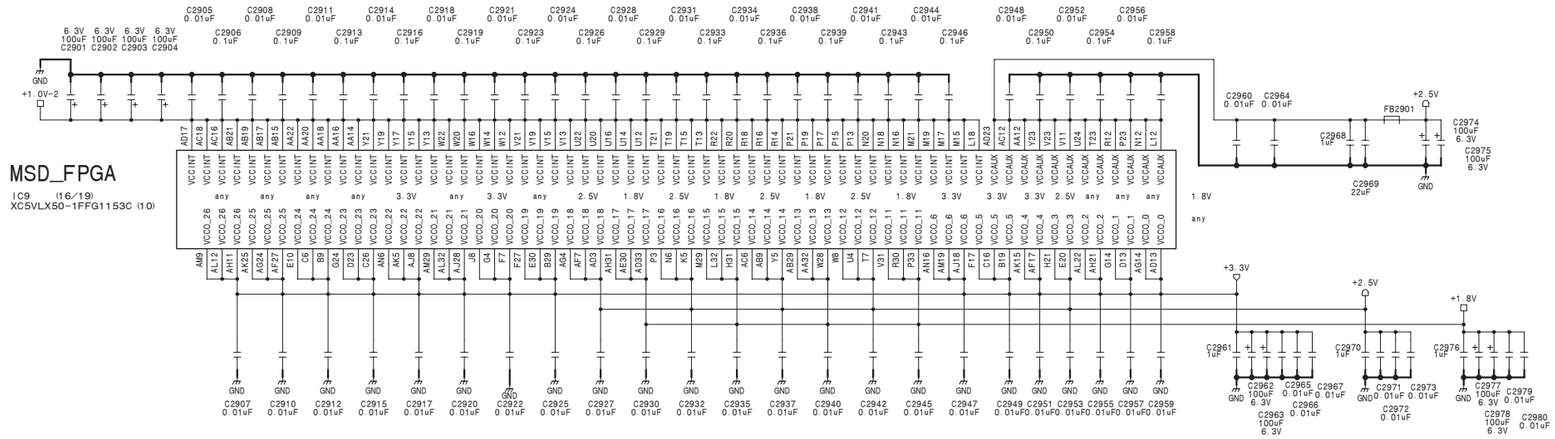

MSD_FPGA

IC9 (14/19)

XC5VLX50-1FFG1153C (10)

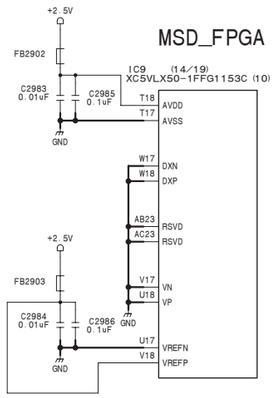

MSD_FPGA

IC9 (18/19)

XC5VLX50-1FFG1153C (10)

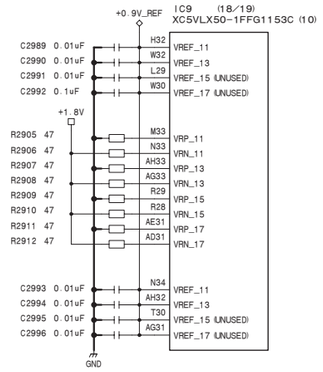

IC2901

NJU7062M (TE2)

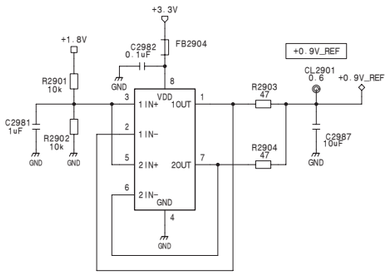



CEN TER

OUT-35 (29/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_29

OUT-35 (30/45)
SUFFIX: -12

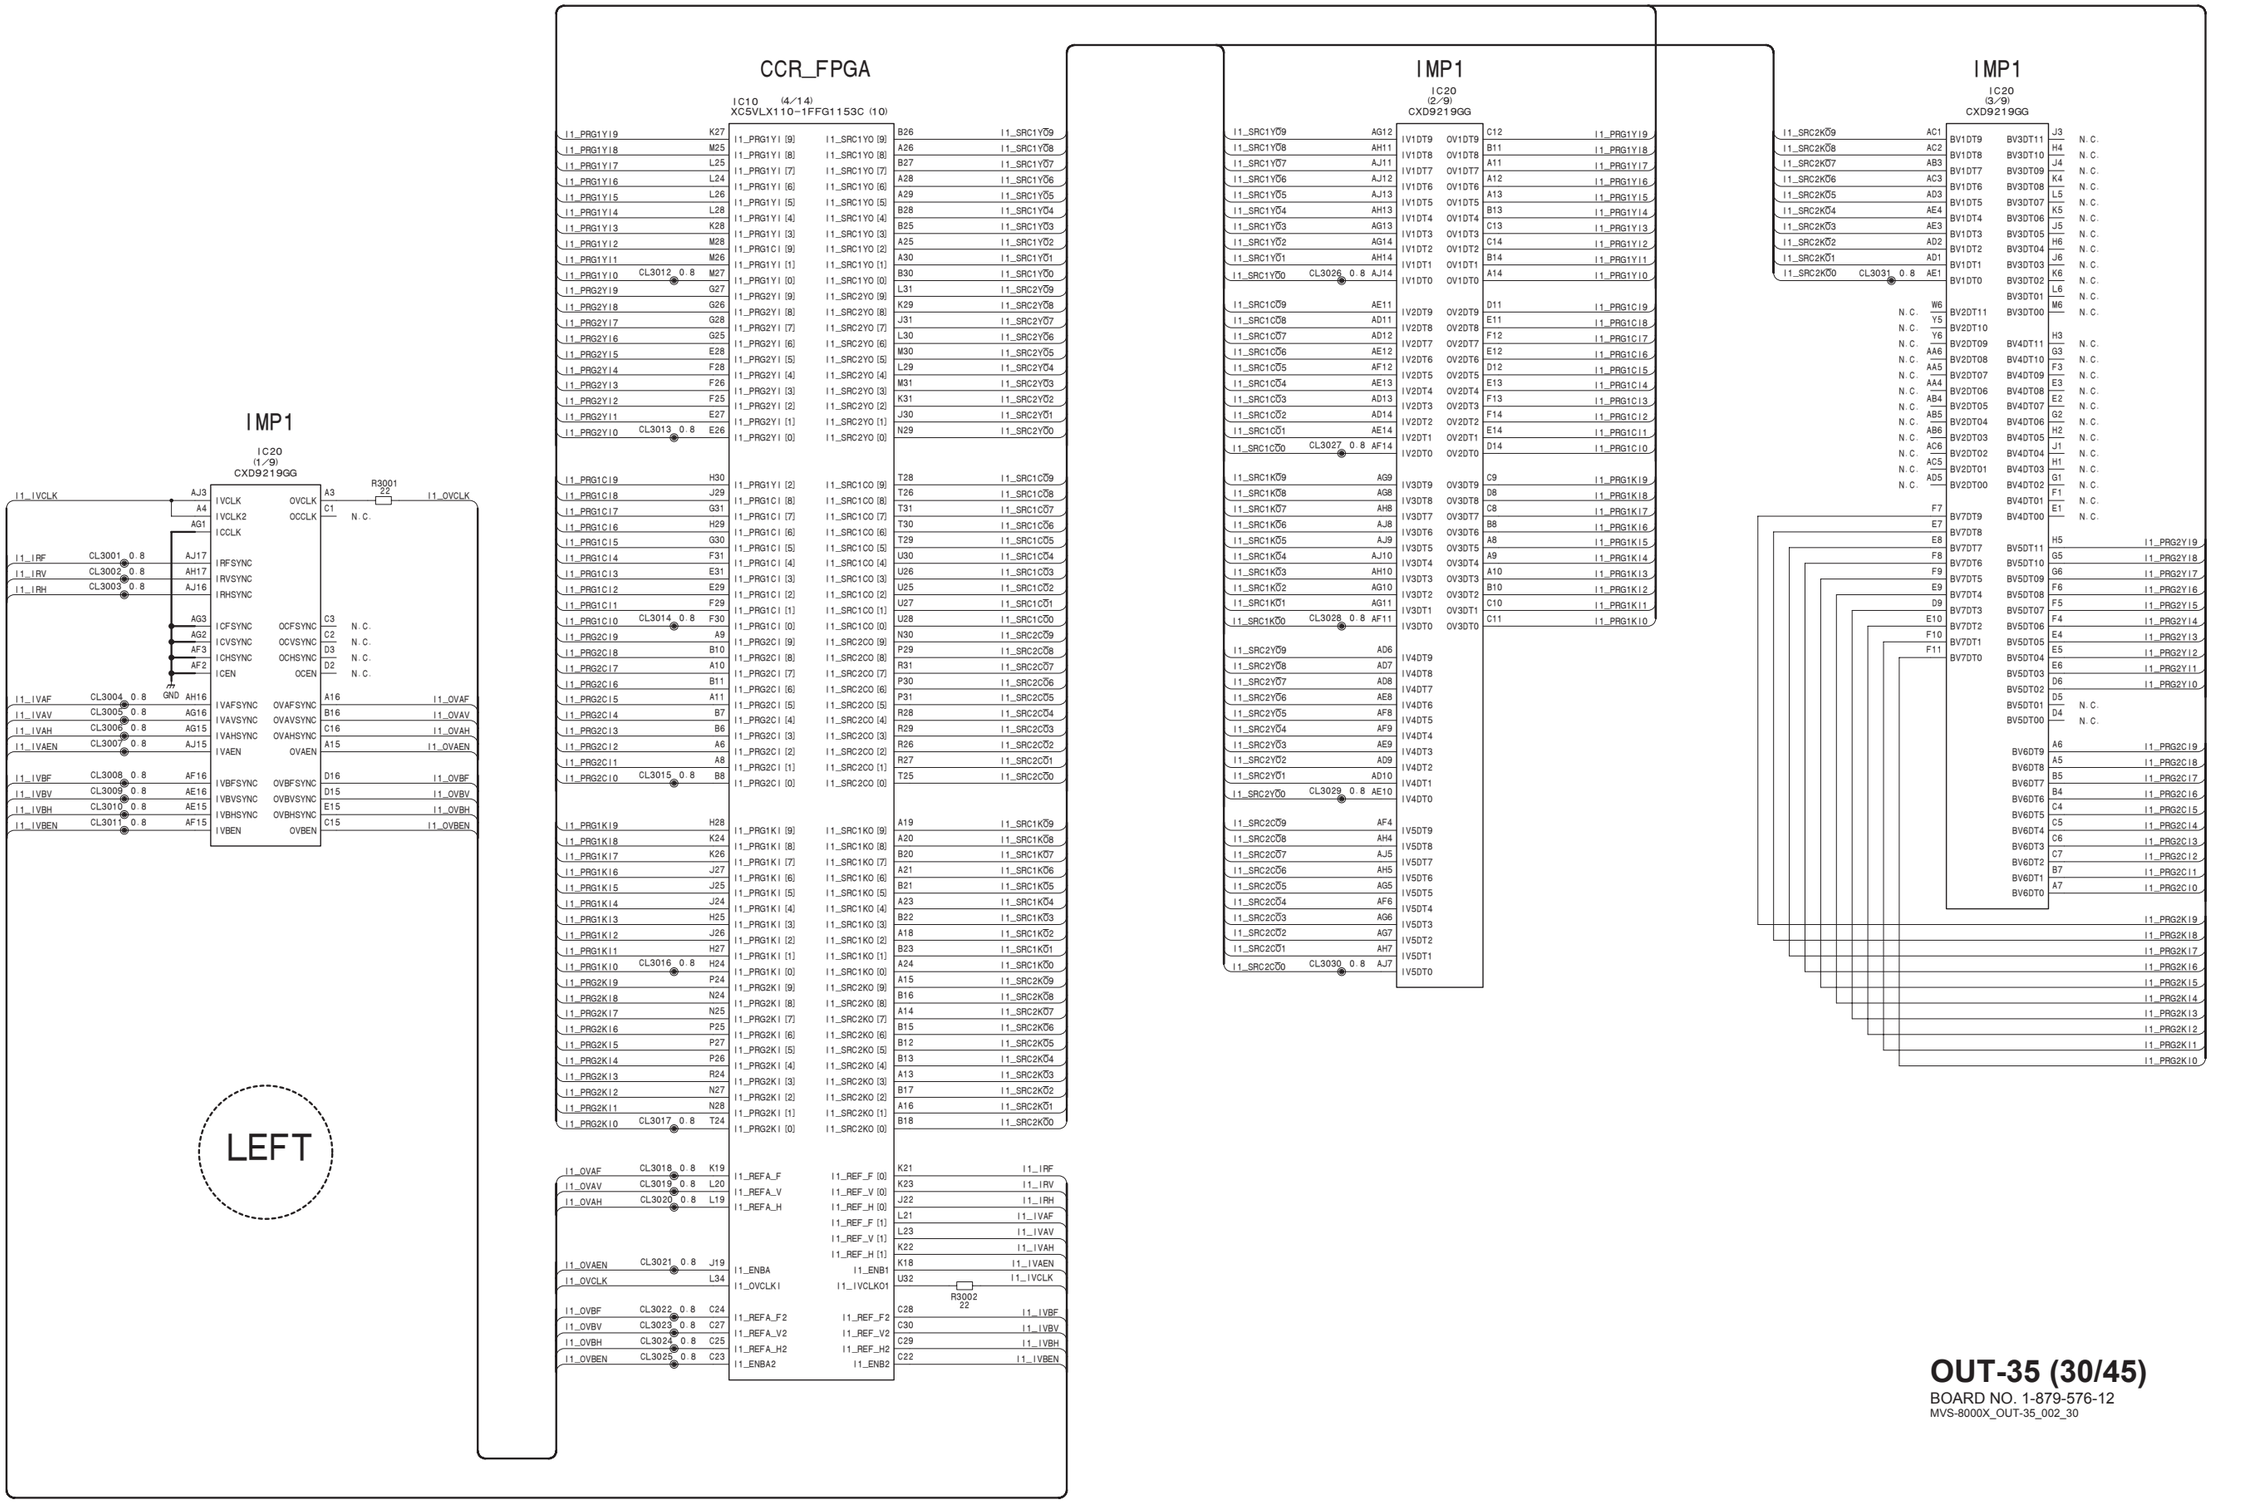

4-264

OUT-35 (30/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_30

OUT-35 (31/45)
SUFFIX: -12

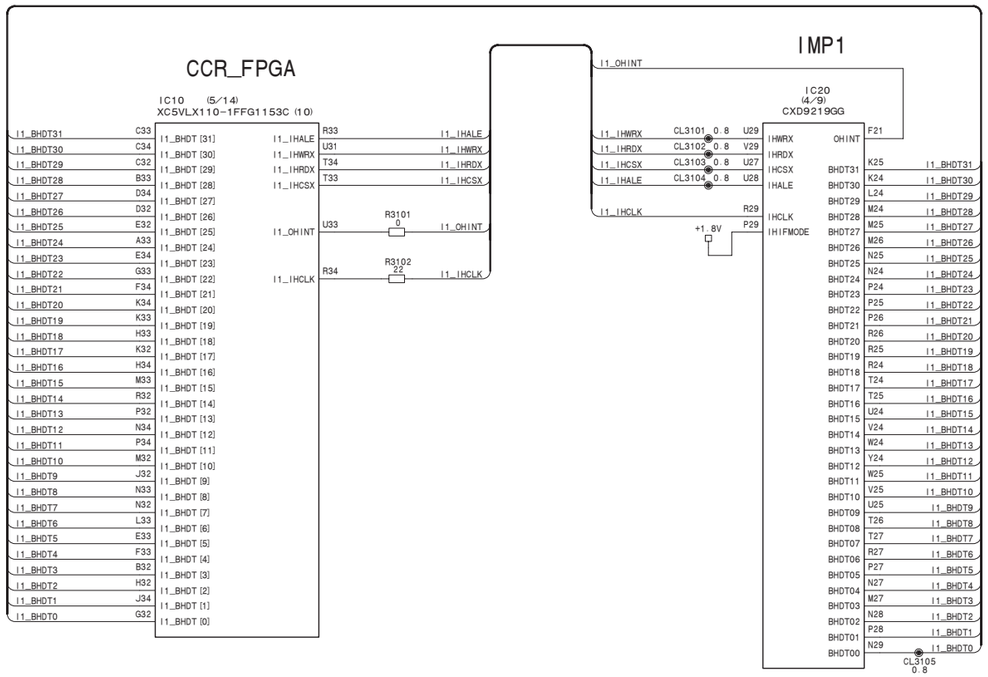

LEFT

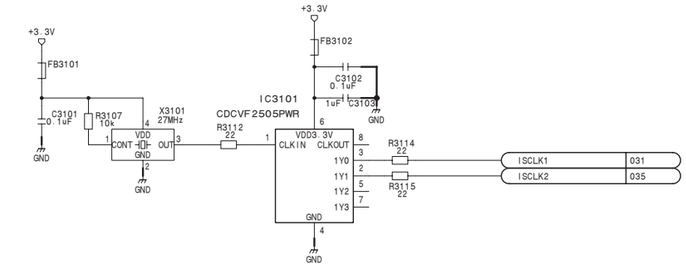

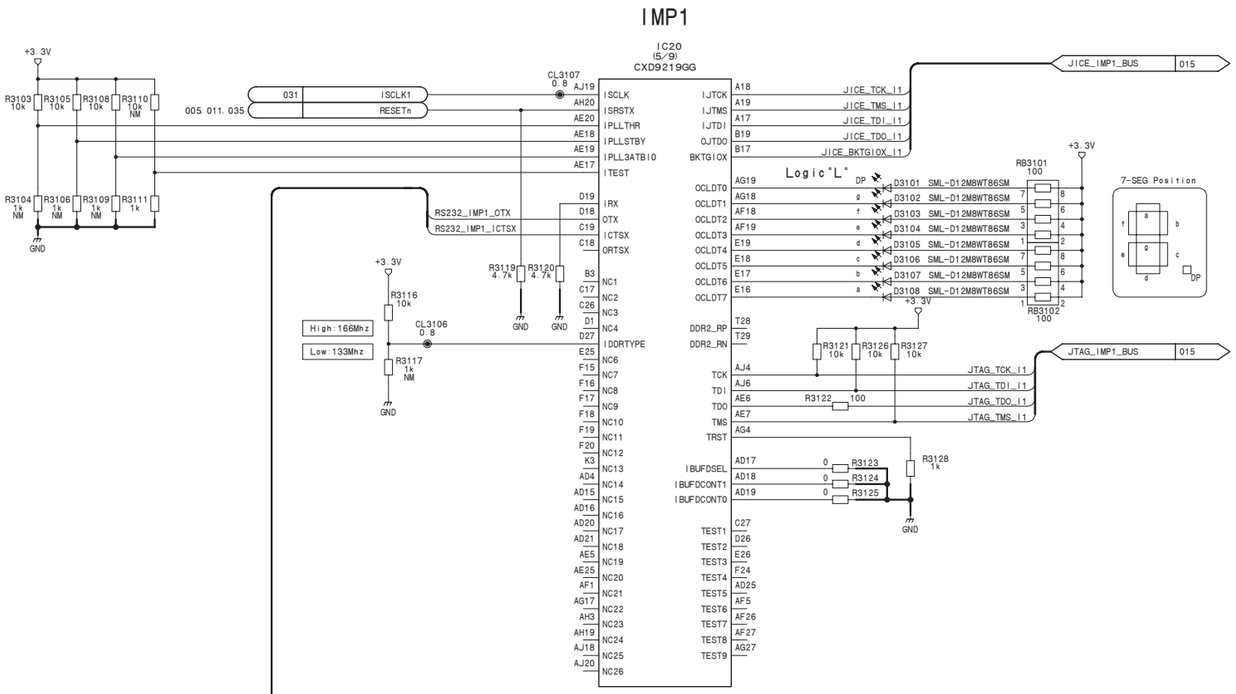

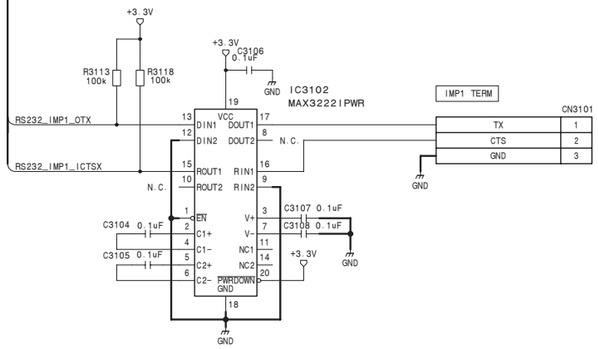

OUT-35 (31/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_31

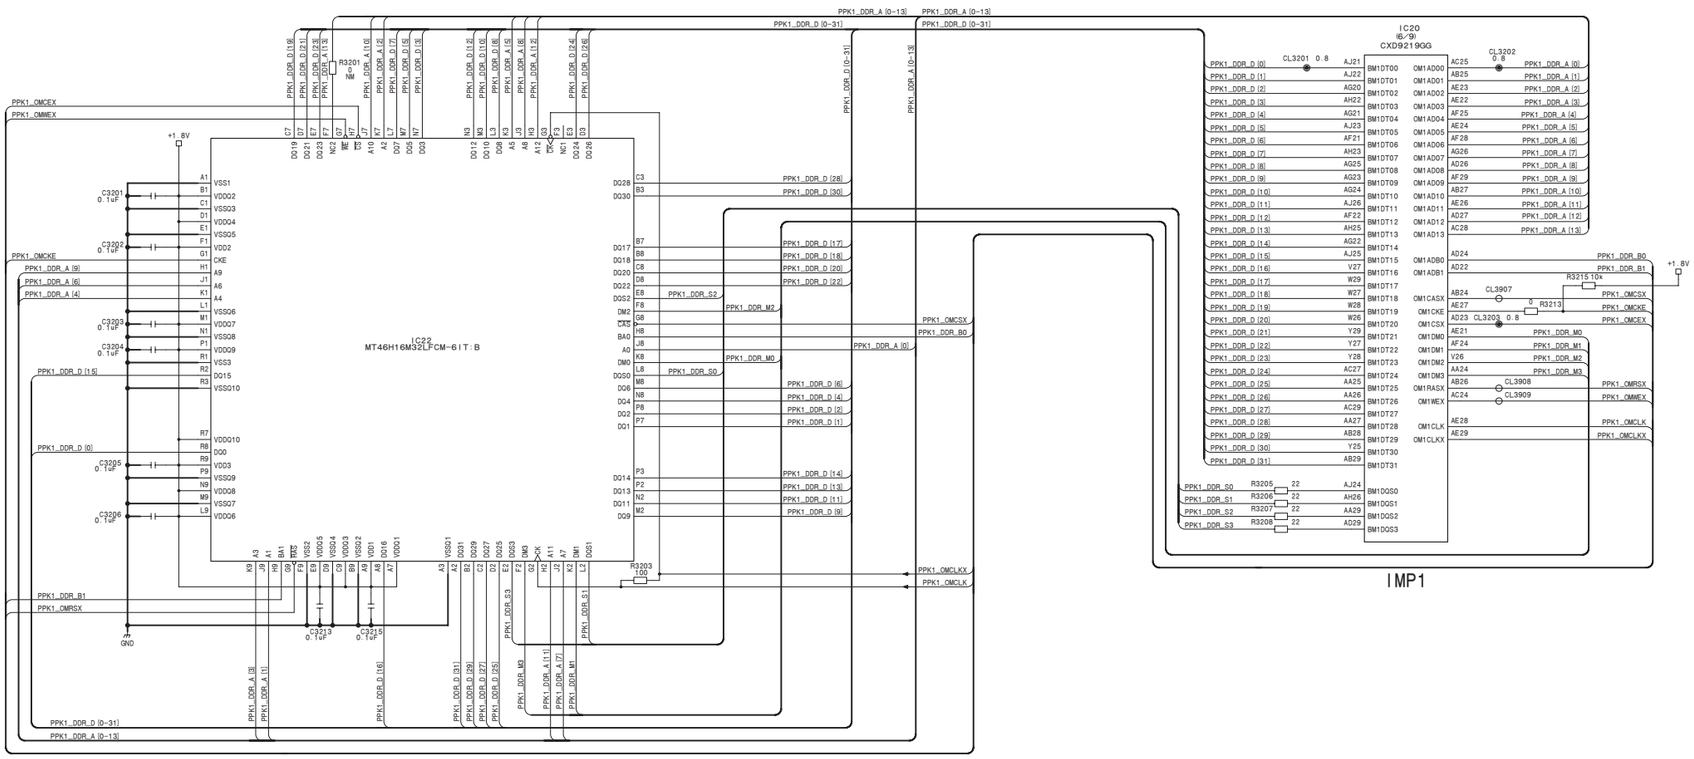

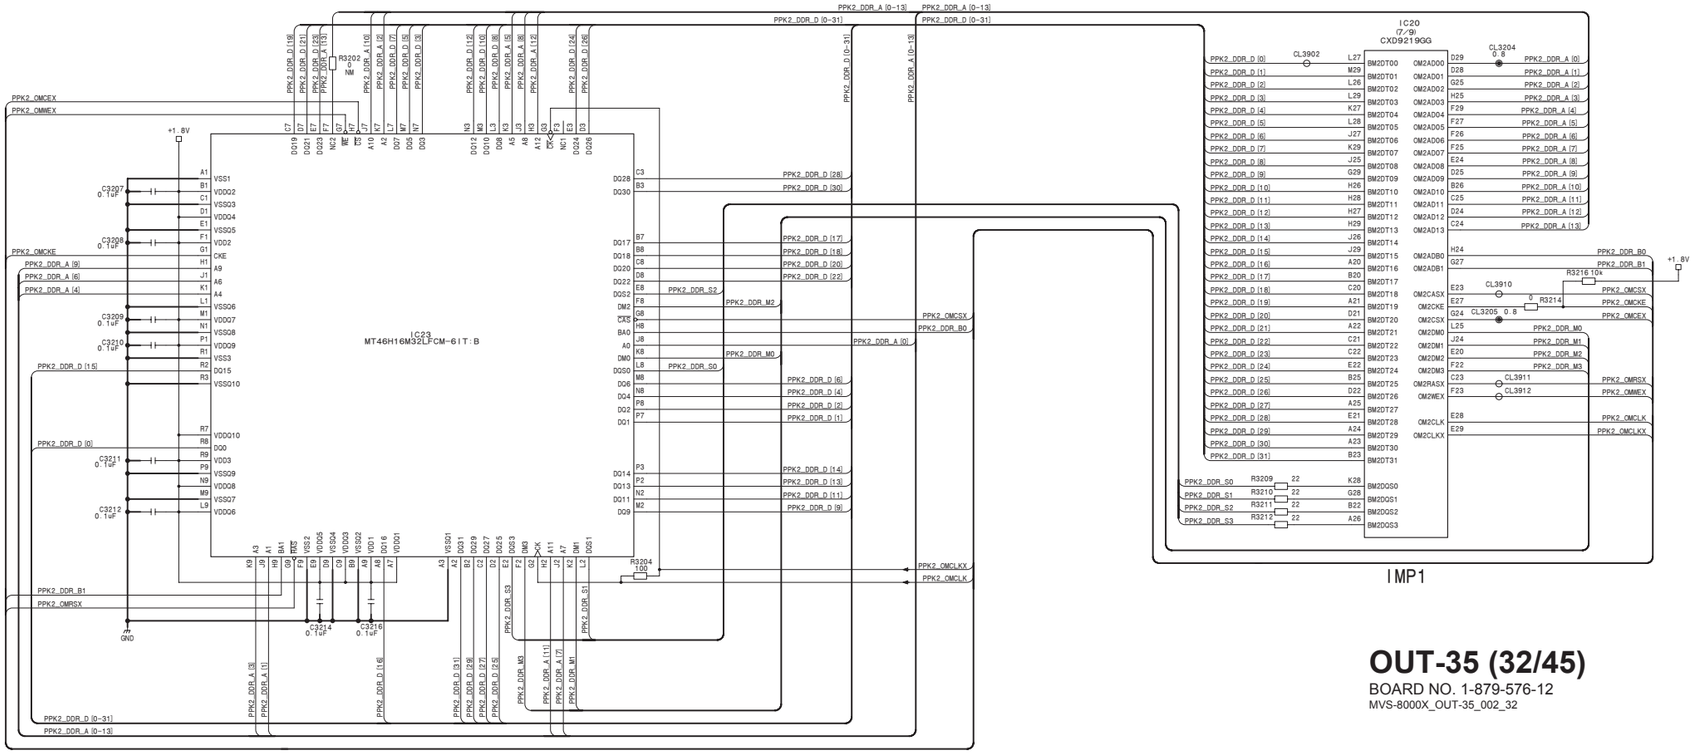

LEFT

OUT-35 (32/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35_002_32

OUT-35 (33/45)
SUFFIX: -12

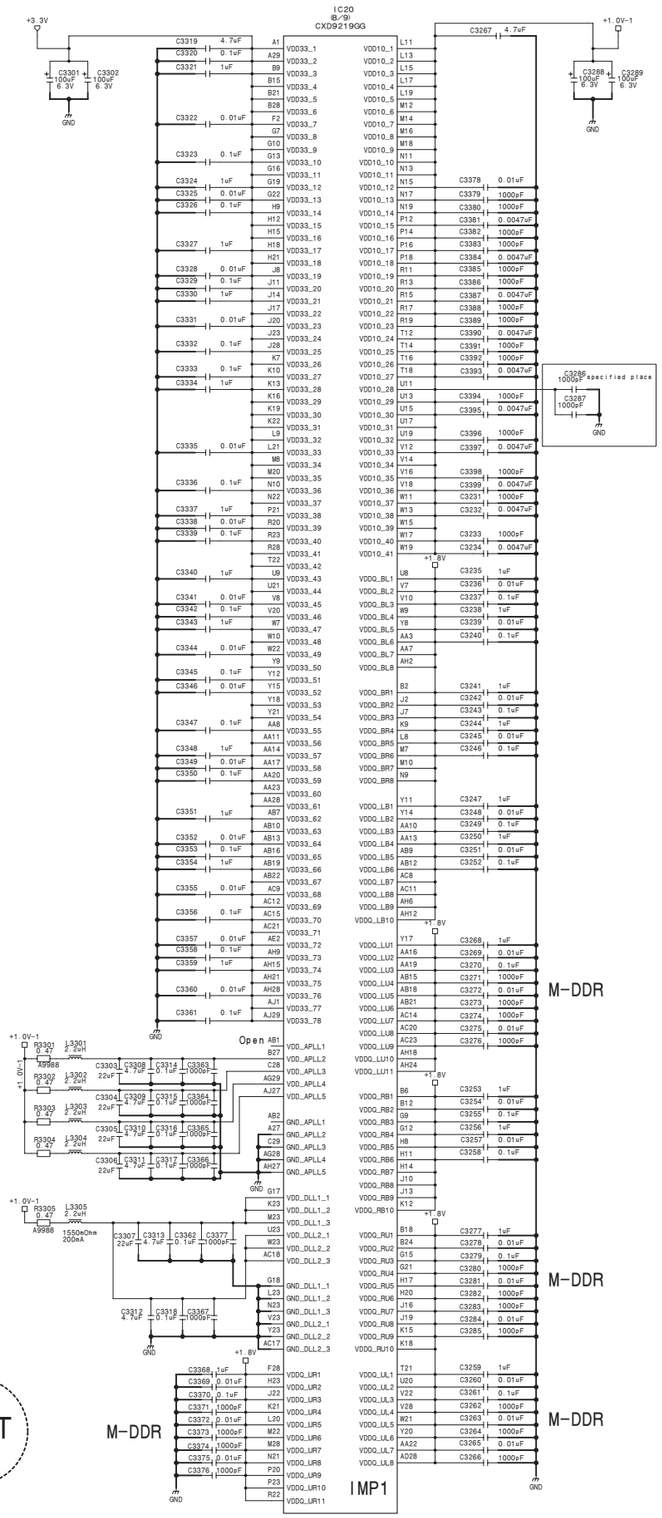

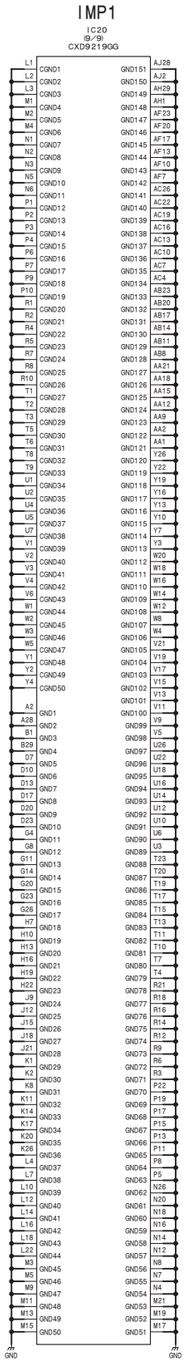

OUT-35 (33/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_33

OUT-35 (34/45)
SUFFIX: -12

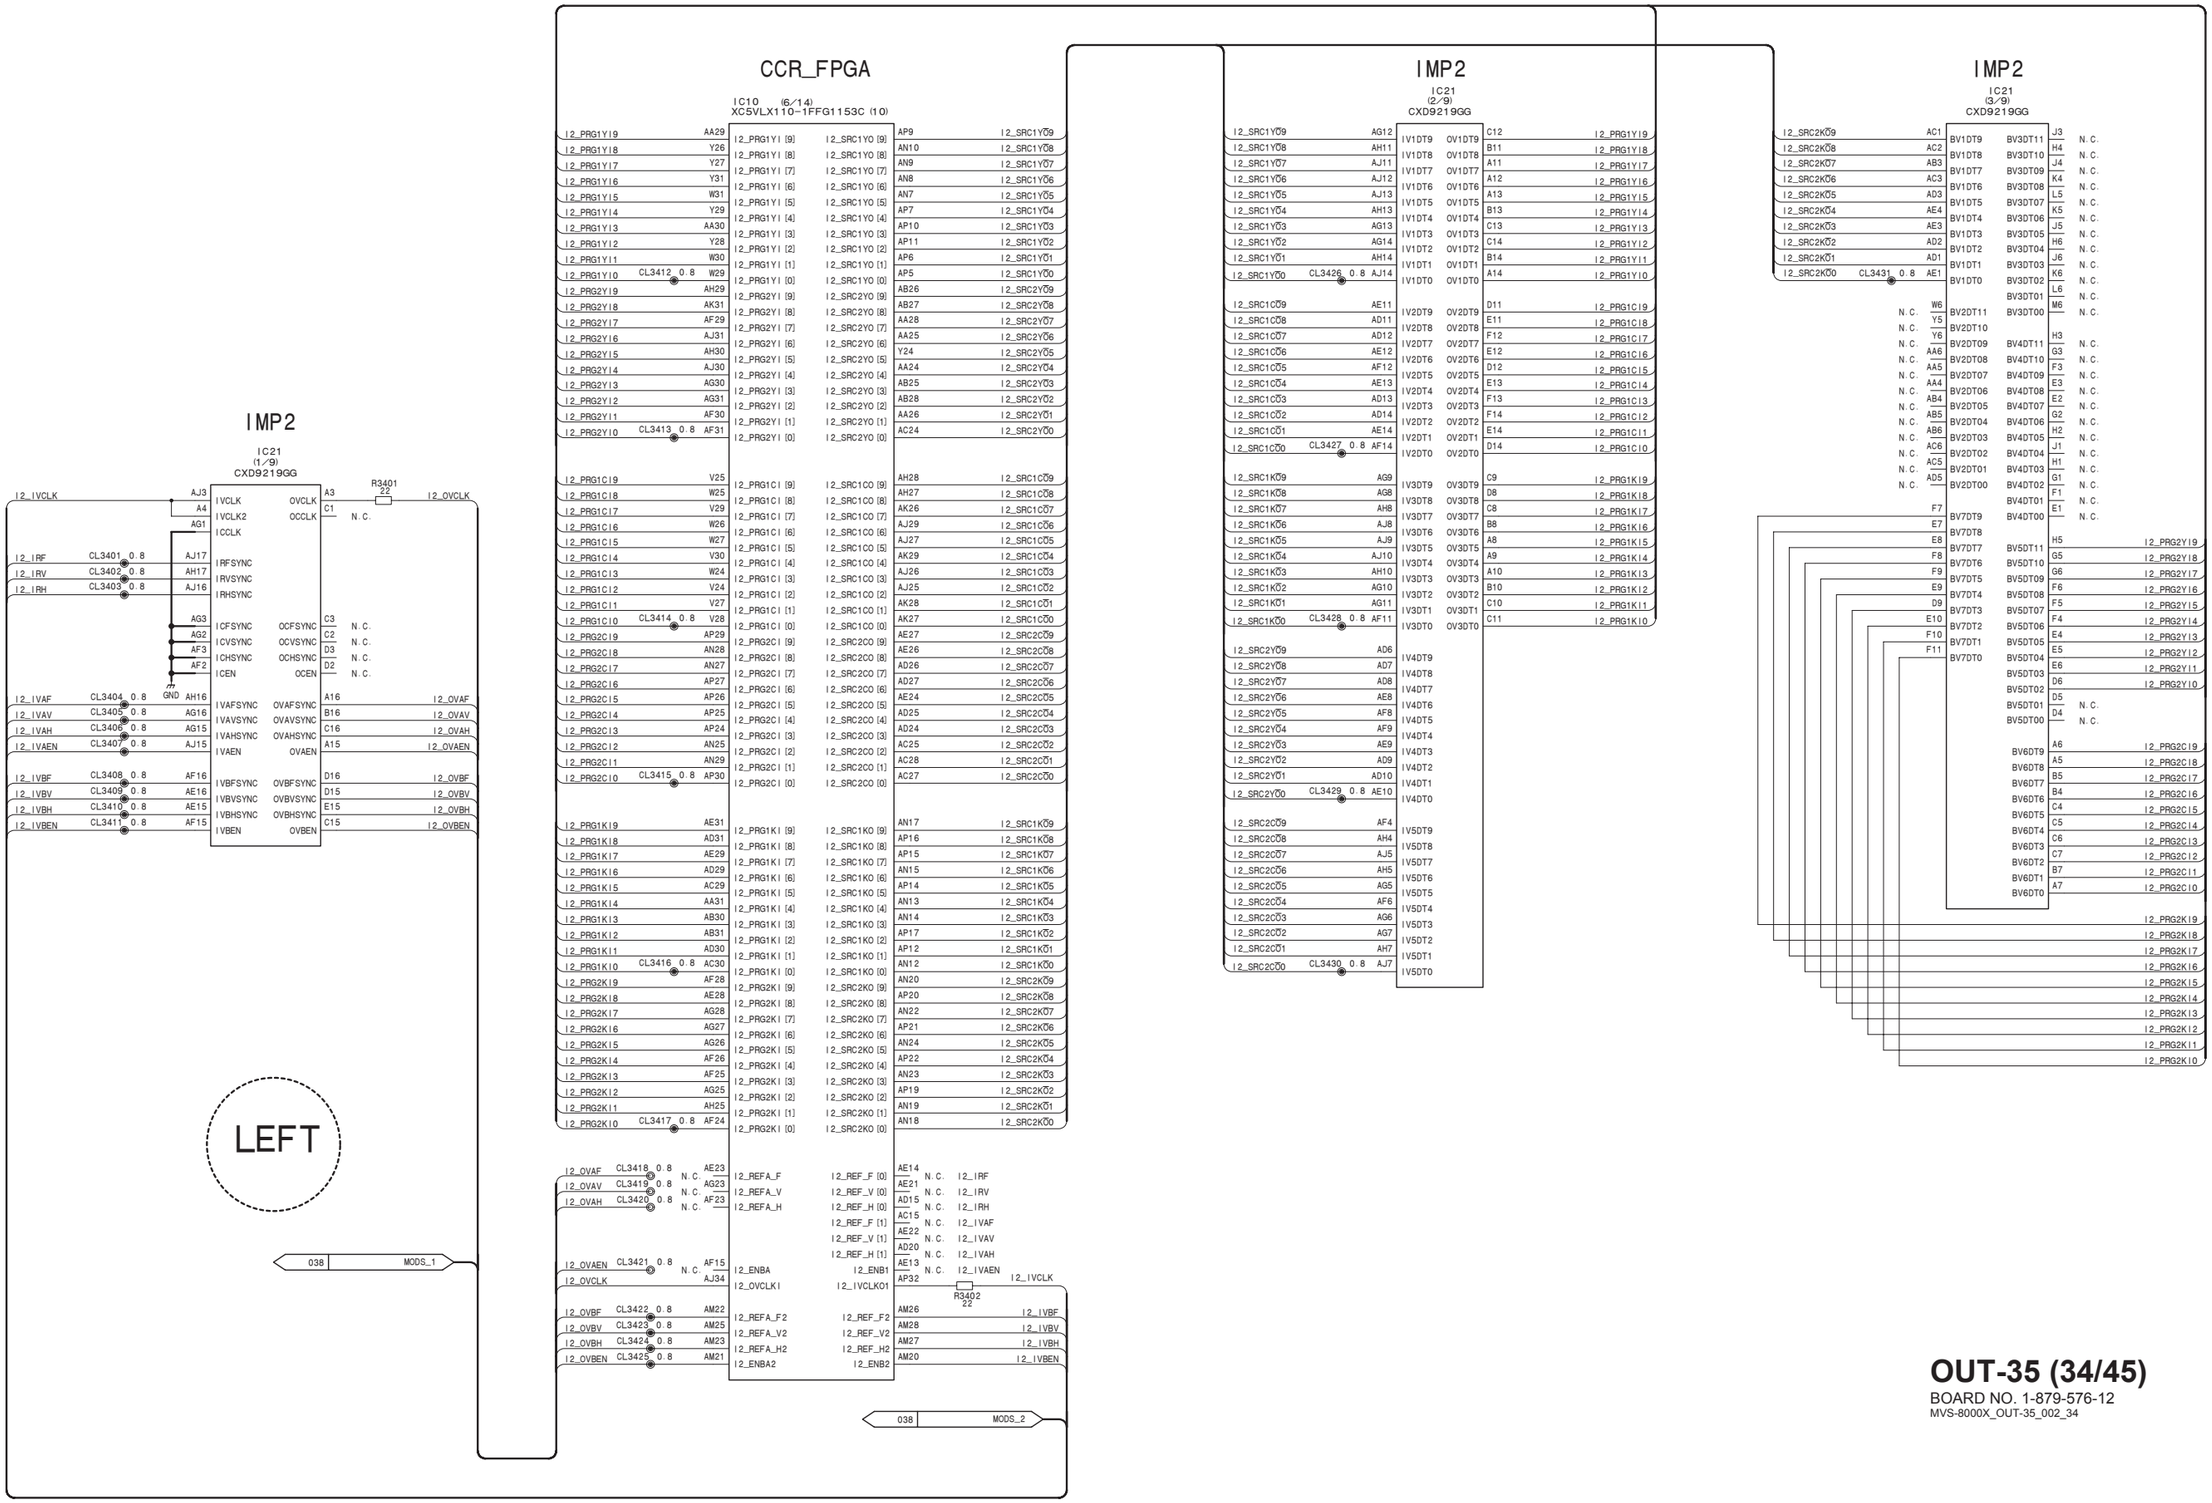

OUT-35 (34/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_34

4-268

OUT-35 (35/45)
SUFFIX: -12

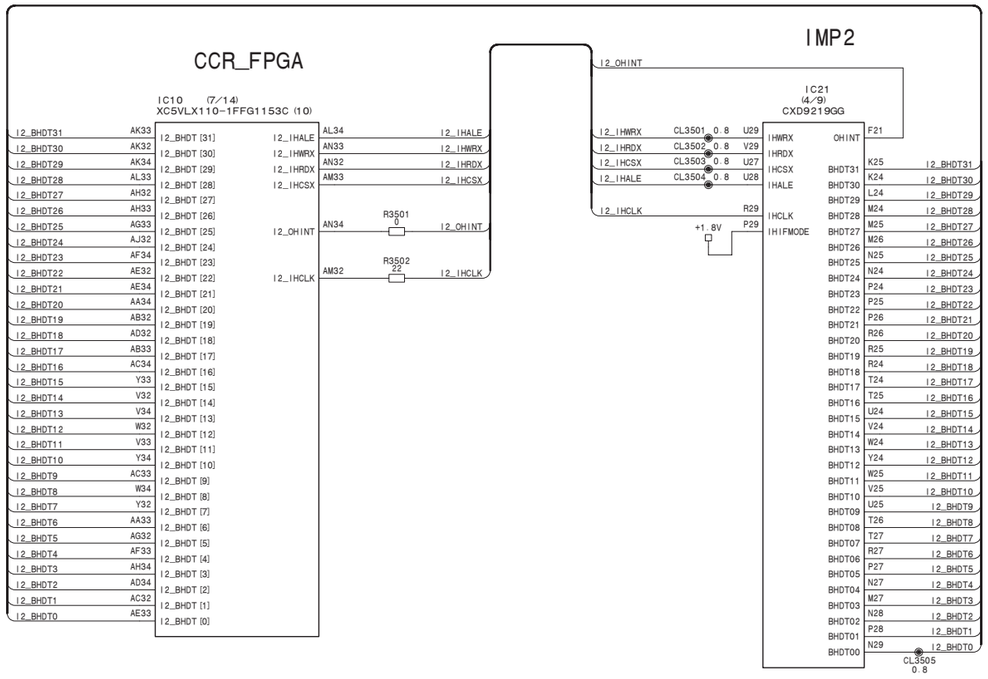

LEFT

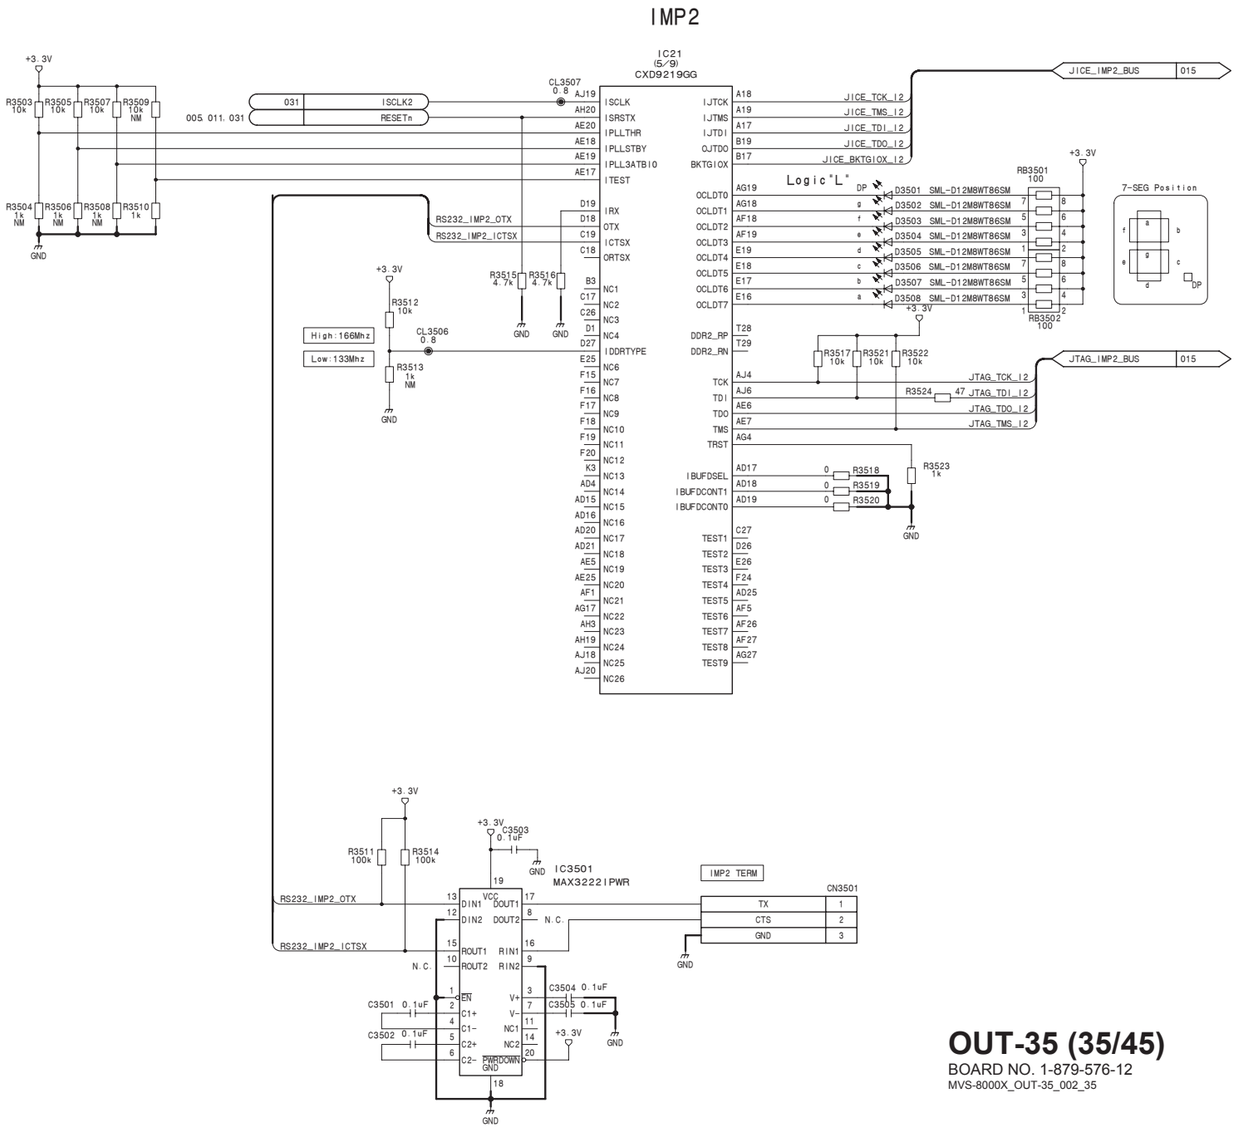

OUT-35 (35/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_35

OUT-35 (36/45)
SUFFIX: -12

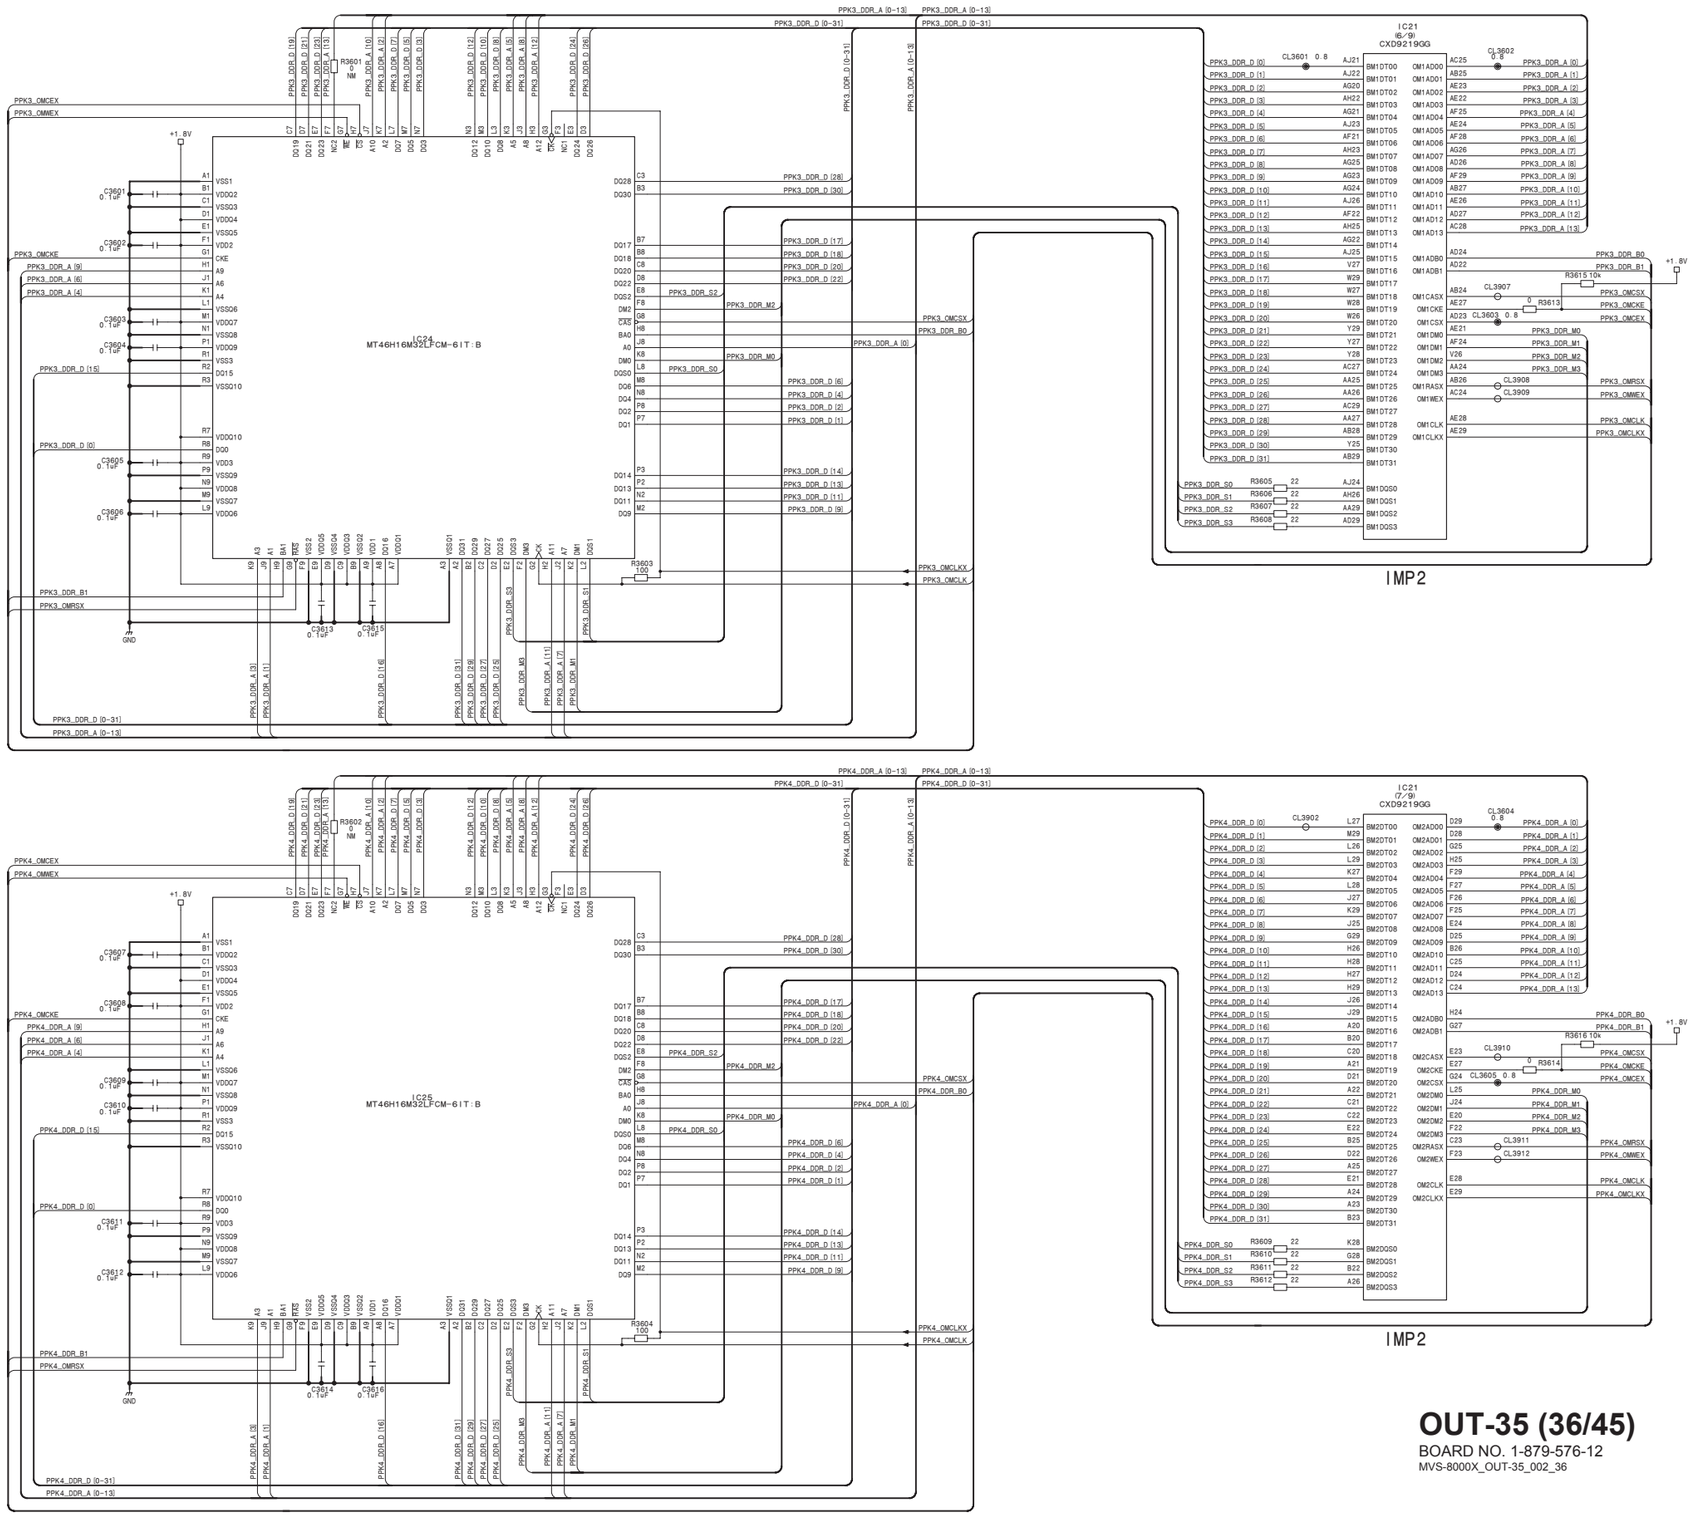

4-270

LEFT

OUT-35 (36/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_36

OUT-35 (37/45)
SUFFIX: -12

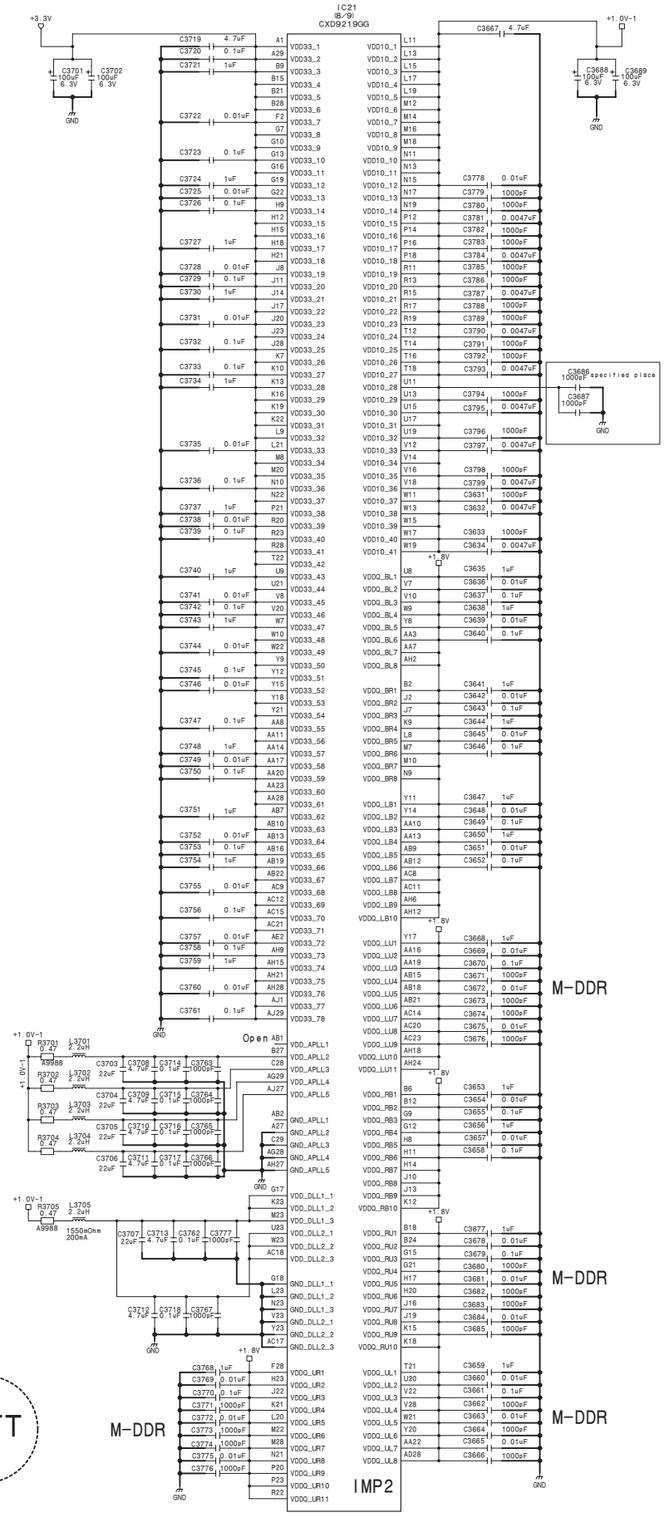

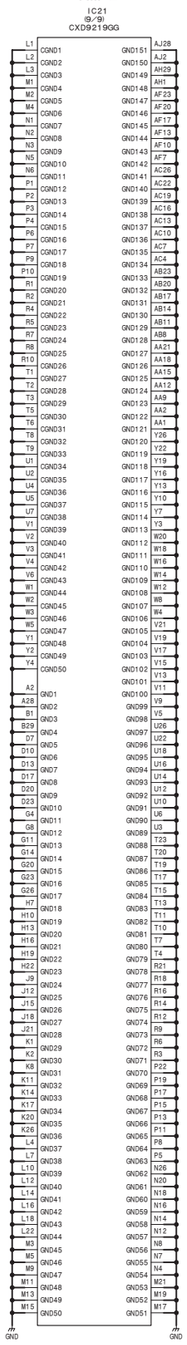

OUT-35 (37/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_37

OUT-35 (38/45)
SUFFIX: -12

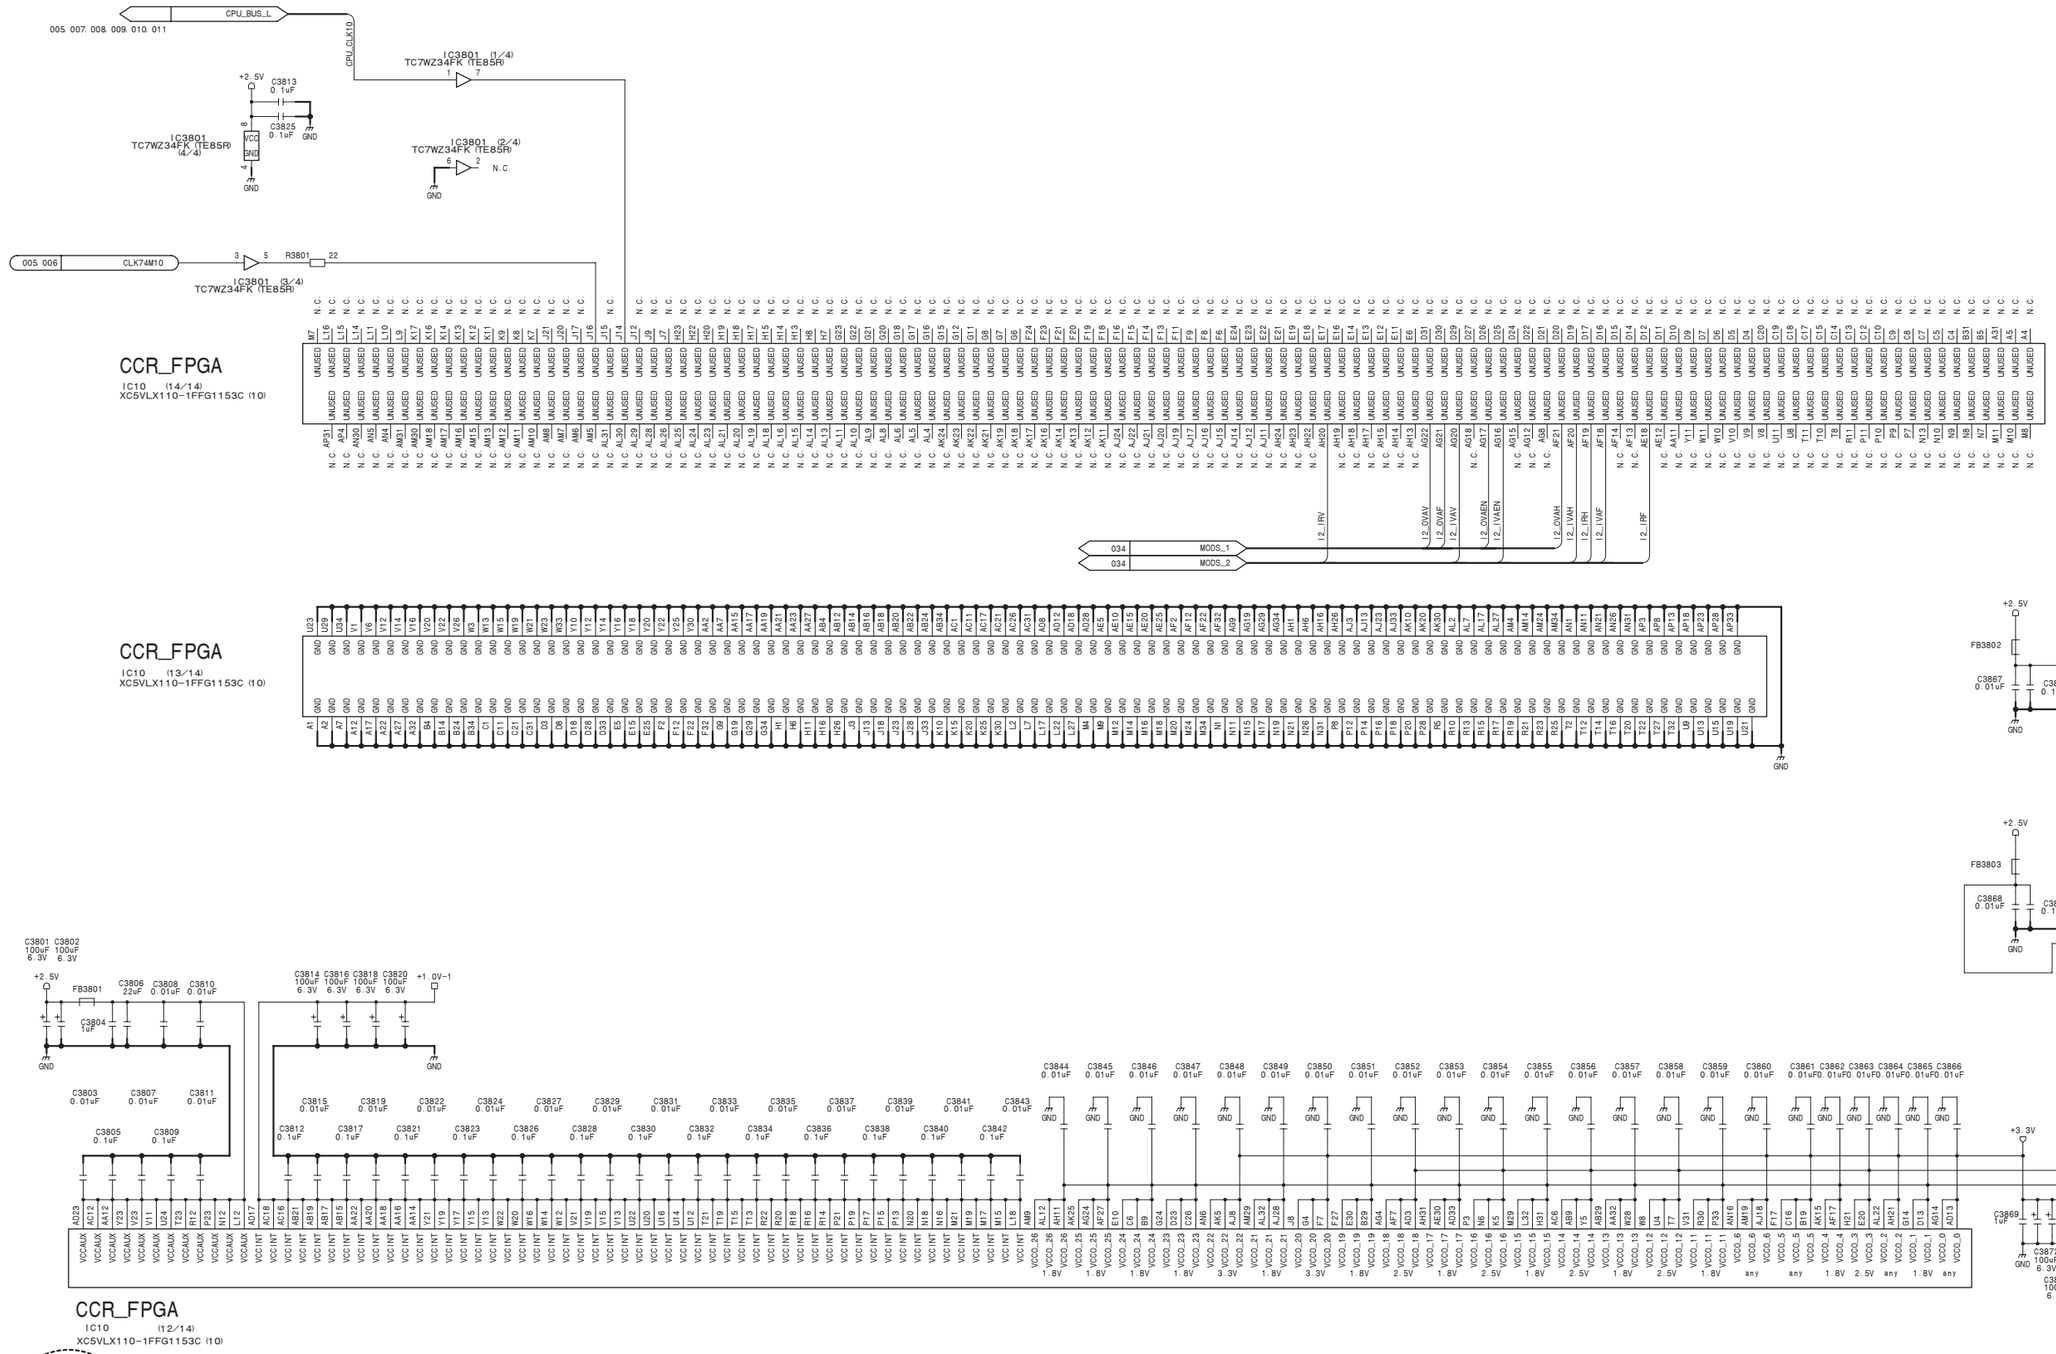

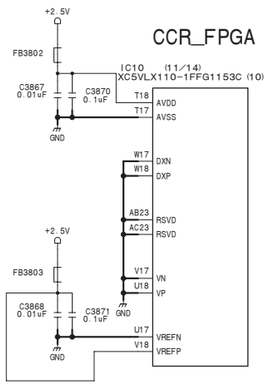

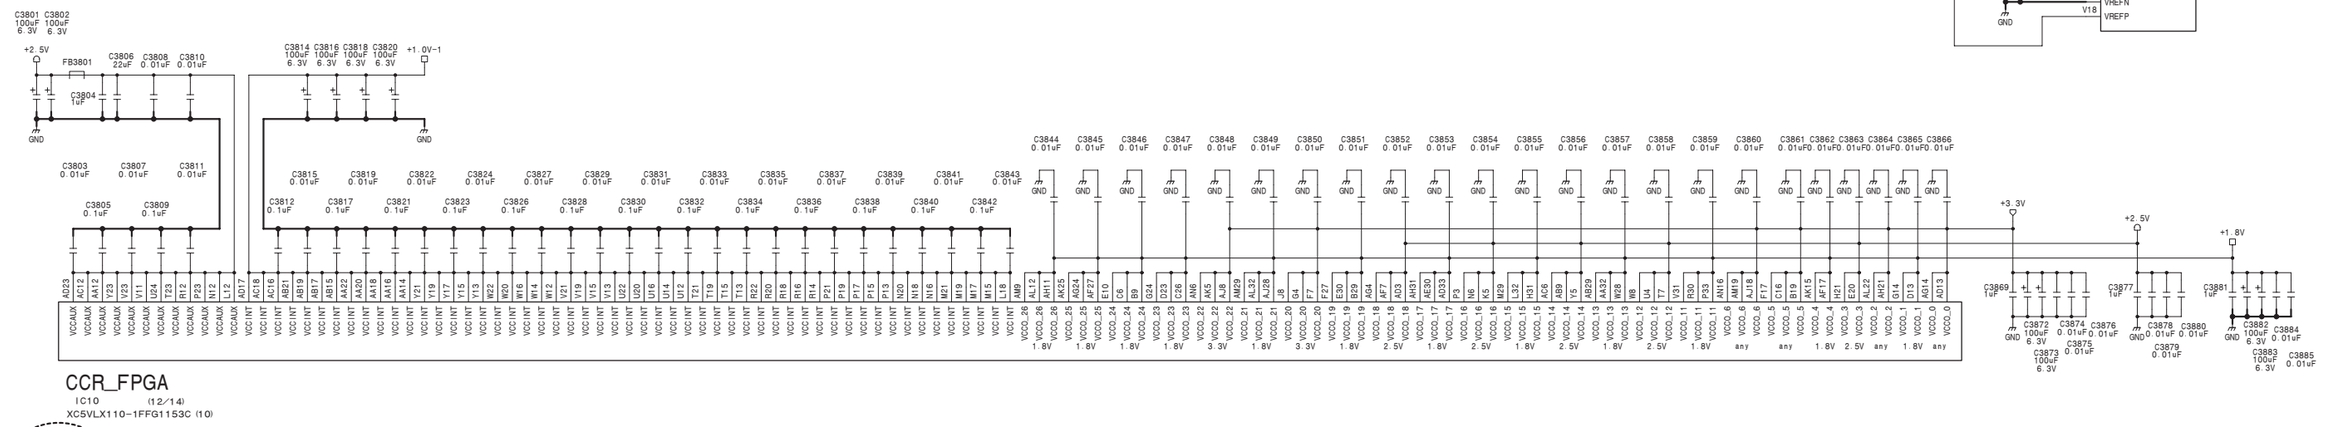

LEFT

OUT-35 (38/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_38

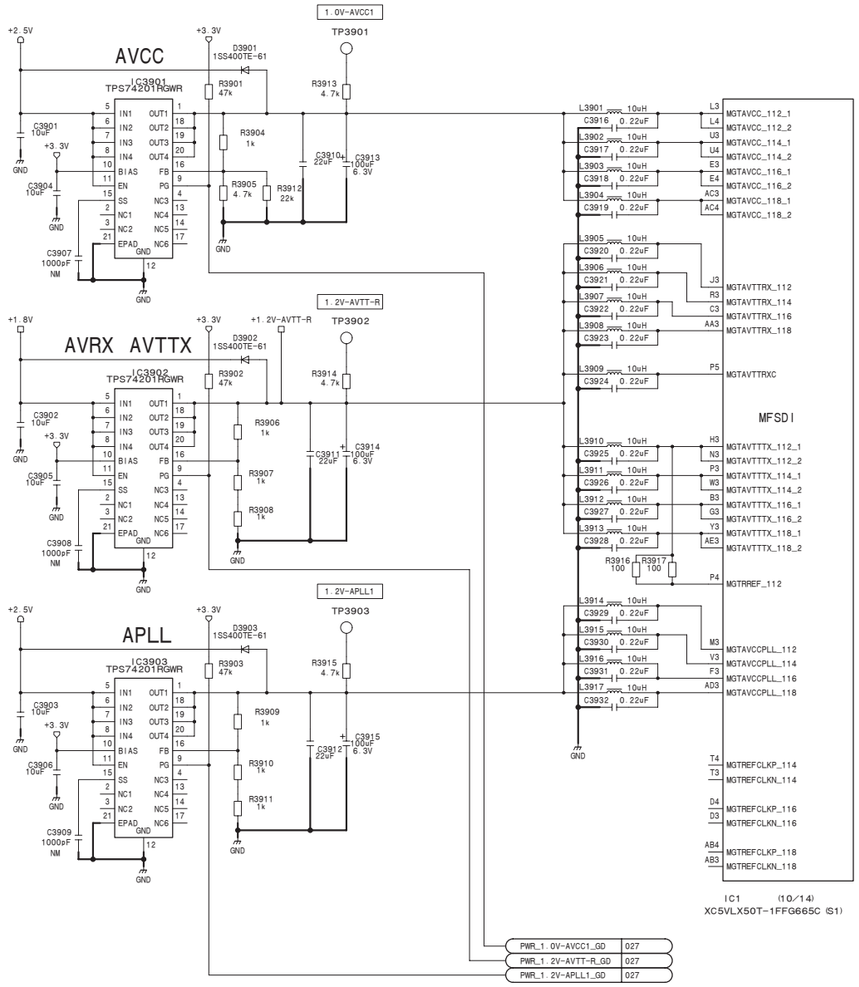
1.0V-AVCC1
TP3901
AVCC
IC3901
TPS74201RGWR
D3901
1SS400TE-61
R3901 47k
R3913 4.7k
R3904 1k
R3905 4.7k
R3912 22k
C3910 22uF
C3913 100uF 6.3V
C3901 10uF
C3904 10uF
C3907 1000pF NM
+3.3V
+2.5V
GND
1.2V-AVTT-R
TP3902
AVRX AVTTX
IC3902
TPS74201RGWR
D3902
1SS400TE-61
R3902 47k
R3914 4.7k
R3906 1k
R3907 1k
R3908 1k
C3911 22uF
C3914 100uF 6.3V
C3902 10uF
C3905 10uF
C3908 1000pF NM
+1.8V
+1.2V-AVTT-R
1.2V-APLL1
TP3903
APLL
IC3903
TPS74201RGWR
D3903
1SS400TE-61
R3903 47k
R3915 4.7k
R3909 1k
R3910 1k
R3911 1k
C3912 22uF
C3915 100uF 6.3V
C3903 10uF
C3906 10uF
C3909 1000pF NM
L3901 10uH
L3902 10uH
L3903 10uH
L3904 10uH
L3905 10uH
L3906 10uH
L3907 10uH
L3908 10uH
L3909 10uH
L3910 10uH
L3911 10uH
L3912 10uH
L3913 10uH
L3914 10uH
L3915 10uH
L3916 10uH
L3917 10uH
C3916 0.22uF
C3917 0.22uF
C3918 0.22uF
C3919 0.22uF
C3920 0.22uF
C3921 0.22uF
C3922 0.22uF
C3923 0.22uF
C3924 0.22uF
C3925 0.22uF
C3926 0.22uF
C3927 0.22uF
C3928 0.22uF
C3929 0.22uF
C3930 0.22uF
C3931 0.22uF
C3932 0.22uF
R3916 100
R3917 100
MGTAVCC_112_1
MGTAVCC_112_2
MGTAVCC_114_1
MGTAVCC_114_2
MGTAVCC_116_1
MGTAVCC_116_2
MGTAVCC_118_1
MGTAVCC_118_2
MGTAVTTRX_112
MGTAVTTRX_114
MGTAVTTRX_116
MGTAVTTRX_118
MGTAVTTRXC
MFSDI
MGTAVTTTX_112_1
MGTAVTTTX_112_2
MGTAVTTTX_114_1
MGTAVTTTX_114_2
MGTAVTTTX_116_1
MGTAVTTTX_116_2
MGTAVTTTX_118_1
MGTAVTTTX_118_2
MGTRREF_112
MGTAVCCPLL_112
MGTAVCCPLL_114
MGTAVCCPLL_116
MGTAVCCPLL_118
MGTREFCLKP_114
MGTREFCLKN_114
MGTREFCLKP_116
MGTREFCLKN_116
MGTREFCLKP_118
MGTREFCLKN_118
IC1 (10/14)
XC5VLX50T-1FFG665C (S1)
PWR_1.0V-AVCC1_GD 027
PWR_1.2V-AVTT-R_GD 027
PWR_1.2V-APLL1_GD 027

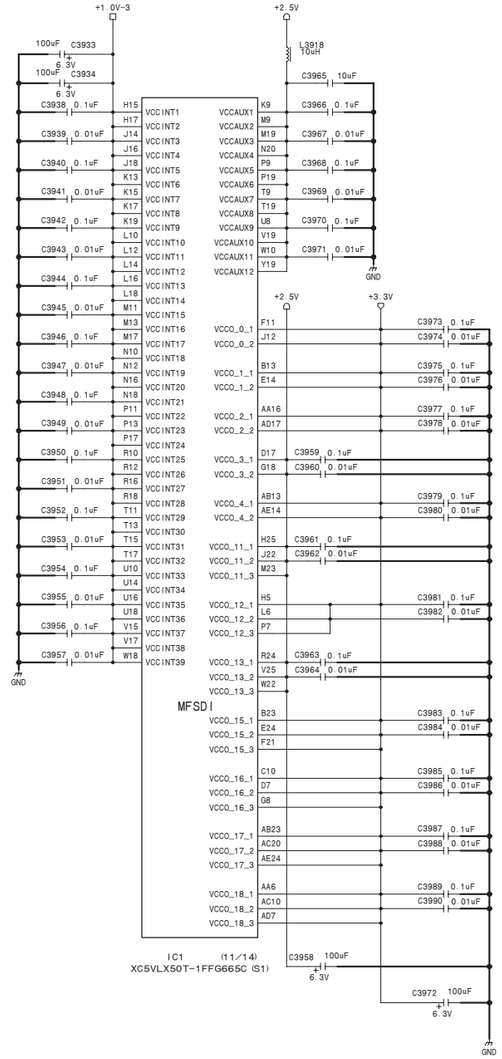
+1.0V-3
+2.5V
C3933 100uF 6.3V
C3934 100uF 6.3V
C3938 0.1uF
C3939 0.01uF
C3940 0.1uF
C3941 0.01uF
C3942 0.1uF
C3943 0.01uF
C3944 0.1uF
C3945 0.01uF
C3946 0.1uF
C3947 0.01uF
C3948 0.1uF
C3949 0.01uF
C3950 0.1uF
C3951 0.01uF
C3952 0.1uF
C3953 0.01uF
C3954 0.1uF
C3955 0.01uF
C3956 0.1uF
C3957 0.01uF
L3918 10uH
C3965 10uF
C3966 0.1uF
C3967 0.01uF
C3968 0.1uF
C3969 0.01uF
C3970 0.1uF
C3971 0.01uF
C3973 0.1uF
C3974 0.01uF
C3975 0.1uF
C3976 0.01uF
C3977 0.1uF
C3978 0.01uF
C3959 0.1uF
C3960 0.01uF
C3979 0.1uF
C3980 0.01uF
C3961 0.1uF
C3962 0.01uF
C3981 0.1uF
C3982 0.01uF
C3963 0.1uF
C3964 0.01uF
C3983 0.1uF
C3984 0.01uF
C3985 0.1uF
C3986 0.01uF
C3987 0.1uF
C3988 0.01uF
C3989 0.1uF
C3990 0.01uF
C3958 100uF 6.3V
C3972 100uF 6.3V
MFSDI
IC1 (11/14)
XC5VLX50T-1FFG665C (S1)


+2.5V
FB3901
C3935 1uF
C3936 0.01uF
C3937 0.01uF
IC1 (9/14)
XC5VLX50T-1FFG665C (S1)
AVDD_0
AVSS_0
VP_0
VN_0
VREFP_0
VREFN_0
DXP_0
DXN_0
RSVD1
RSVD2
R3918 0
R3919 0
R3920 0
R3921 0
MFSDI
GND

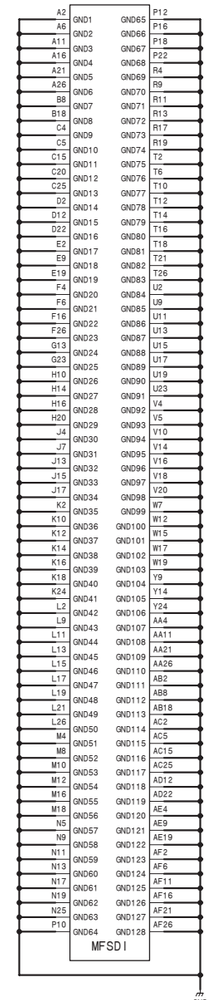
IC1 (12/14)
XC5VLX50T-1FFG665C (S1)
GND1
GND2
GND3
GND4
GND5
GND6
GND7
GND8
GND9
GND10
GND11
GND12
GND13
GND14
GND15
GND16
GND17
GND18
GND19
GND20
GND21
GND22
GND23
GND24
GND25
GND26
GND27
GND28
GND29
GND30
GND31
GND32
GND33
GND34
GND35
GND36
GND37
GND38
GND39
GND40
GND41
GND42
GND43
GND44
GND45
GND46
GND47
GND48
GND49
GND50
GND51
GND52
GND53
GND54
GND55
GND56
GND57
GND58
GND59
GND60
GND61
GND62
GND63
GND64
GND65
GND66
GND67
GND68
GND69
GND70
GND71
GND72
GND73
GND74
GND75
GND76
GND77
GND78
GND79
GND80
GND81
GND82
GND83
GND84
GND85
GND86
GND87
GND88
GND89
GND90
GND91
GND92
GND93
GND94
GND95
GND96
GND97
GND98
GND99
GND100
GND101
GND102
GND103
GND104
GND105
GND106
GND107
GND108
GND109
GND110
GND111
GND112
GND113
GND114
GND115
GND116
GND117
GND118
GND119
GND120
GND121
GND122
GND123
GND124
GND125
GND126
GND127
GND128
MFSDI
GND


MFSDI
NC
NC
IC1 (13/14)
XC5VLX50T-1FFG665C (S1)

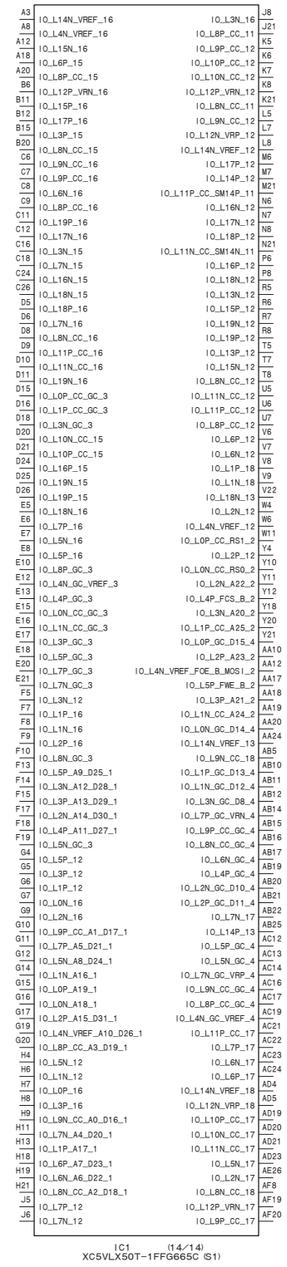
IC1 (14/14)
XC5VLX50T-1FFG665C (S1)
IO_L14N_VREF_16
IO_L4N_VREF_16
IO_L15N_16
IO_L6P_15
IO_L8P_CC_15
IO_L12P_VRN_16
IO_L15P_16
IO_L17P_16
IO_L3P_15
IO_L8N_CC_15
IO_L9N_CC_16
IO_L9P_CC_16
IO_L6N_16
IO_L8P_CC_16
IO_L19P_16
IO_L17N_16
IO_L3N_15
IO_L7N_15
IO_L16N_15
IO_L18N_15
IO_L18P_16
IO_L7N_16
IO_L8N_CC_16
IO_L11P_CC_16
IO_L11N_CC_16
IO_L19N_16
IO_L0P_CC_GC_3
IO_L1P_CC_GC_3
IO_L3N_GC_3
IO_L10N_CC_15
IO_L10P_CC_15
IO_L16P_15
IO_L19N_15
IO_L19P_15
IO_L18N_16
IO_L7P_16
IO_L5N_16
IO_L5P_16
IO_L8P_GC_3
IO_L4N_GC_VREF_3
IO_L4P_GC_3
IO_L0N_CC_GC_3
IO_L1N_CC_GC_3
IO_L3P_GC_3
IO_L5P_GC_3
IO_L7P_GC_3
IO_L7N_GC_3
IO_L3N_12
IO_L1P_16
IO_L2P_16
IO_L8N_GC_3
IO_L5P_A9_D25_1
IO_L3N_A12_D28_1
IO_L3P_A13_D29_1
IO_L2N_A14_D30_1
IO_L4P_A11_D27_1
IO_L5N_GC_3
IO_L5P_12
IO_L3P_12
IO_L1P_12
IO_L0N_16
IO_L2N_16
IO_L9P_CC_A1_D17_1
IO_L7P_A5_D21_1
IO_L5N_A8_D24_1
IO_L1N_A16_1
IO_L0P_A19_1
IO_L0N_A18_1
IO_L2P_A15_D31_1
IO_L4N_VREF_A10_D26_1
IO_L8P_CC_A3_D19_1
IO_L5N_12
IO_L1N_12
IO_L0P_16
IO_L3P_16
IO_L9N_CC_A0_D16_1
IO_L7N_A4_D20_1
IO_L1P_A17_1
IO_L6P_A7_D23_1
IO_L6N_A6_D22_1
IO_L8N_CC_A2_D18_1
IO_L7P_12
IO_L7N_12
IO_L3N_16
IO_L8P_CC_11
IO_L9P_CC_12
IO_L10P_CC_12
IO_L10N_CC_12
IO_L12P_VRN_12
IO_L8N_CC_11
IO_L9N_CC_12
IO_L12N_VRP_12
IO_L14N_VREF_12
IO_L17P_12
IO_L14P_12
IO_L11P_CC_SM14P_11
IO_L16N_12
IO_L17N_12
IO_L18P_12
IO_L11N_CC_SM14N_11
IO_L16P_12
IO_L18N_12
IO_L13N_12
IO_L15P_12
IO_L19N_12
IO_L19P_12
IO_L13P_12
IO_L15N_12
IO_L8N_CC_12
IO_L11N_CC_12
IO_L11P_CC_12
IO_L8P_CC_12
IO_L10N_CC_15
IO_L6P_12
IO_L6N_12
IO_L11P_18
IO_L11N_18
IO_L18N_13
IO_L2N_12
IO_L4N_VREF_12
IO_L0P_CC_RS1_2
IO_L2P_12
IO_L0N_CC_RS0_2
IO_L2N_A22_2
IO_L4P_FCS_B_2
IO_L3N_A20_2
IO_L1P_CC_A25_2
IO_L0P_GC_D15_4
IO_L2P_A23_2
IO_L4N_VREF_FOE_B_MOSI_2
IO_L5P_FWE_B_2
IO_L3P_A21_2
IO_L1N_CC_A24_2
IO_L0N_GC_D14_4
IO_L14N_VREF_13
IO_L9N_CC_18
IO_L1P_GC_D13_4
IO_L1N_GC_D12_4
IO_L3N_GC_D8_4
IO_L7P_GC_VRN_4
IO_L9P_CC_GC_4
IO_L8N_CC_GC_4
IO_L6N_GC_4
IO_L4P_GC_4
IO_L2N_GC_D10_4
IO_L2P_GC_D11_4
IO_L7N_17
IO_L14P_13
IO_L5P_GC_4
IO_L5N_GC_4
IO_L7N_GC_VRP_4
IO_L9N_CC_GC_4
IO_L8P_CC_GC_4
IO_L4N_GC_VREF_4
IO_L11P_CC_17
IO_L7P_17
IO_L6N_17
IO_L6P_17
IO_L14N_VREF_18
IO_L12N_VRP_18
IO_L10P_CC_17
IO_L10N_CC_17
IO_L11N_CC_17
IO_L5N_17
IO_L2N_17
IO_L8N_CC_18
IO_L12P_VRN_17
IO_L9P_CC_17

OUT-35 (40/45)
SUFFIX: -12

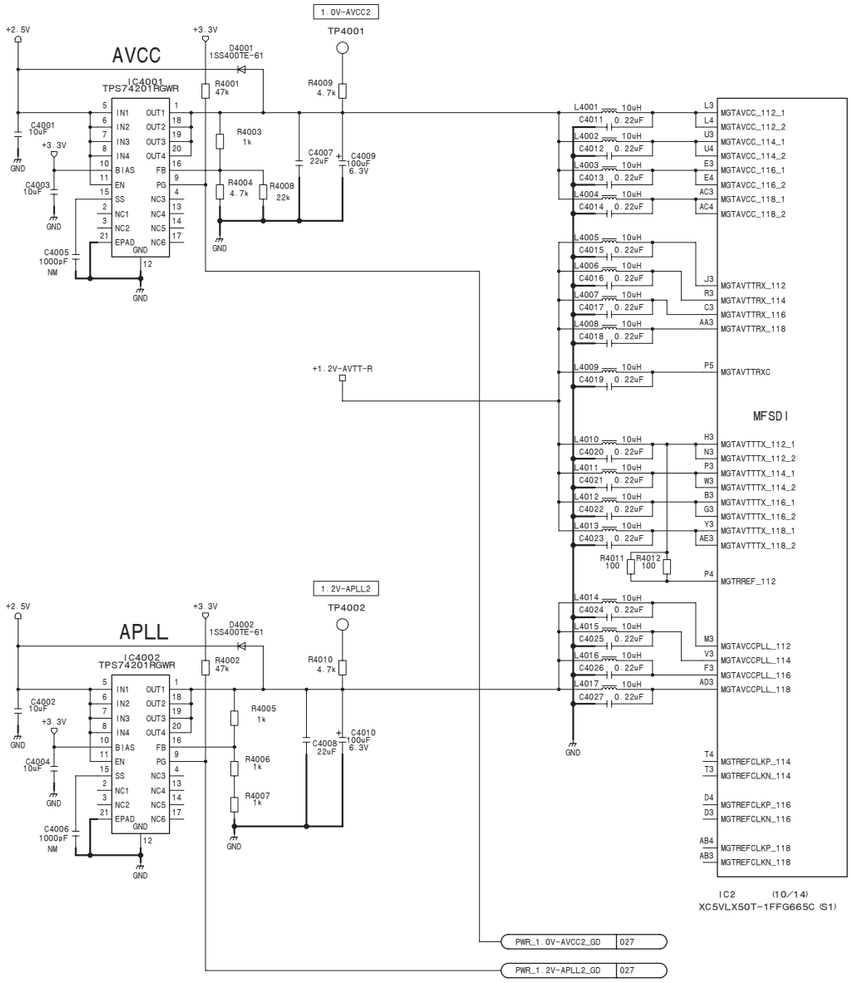

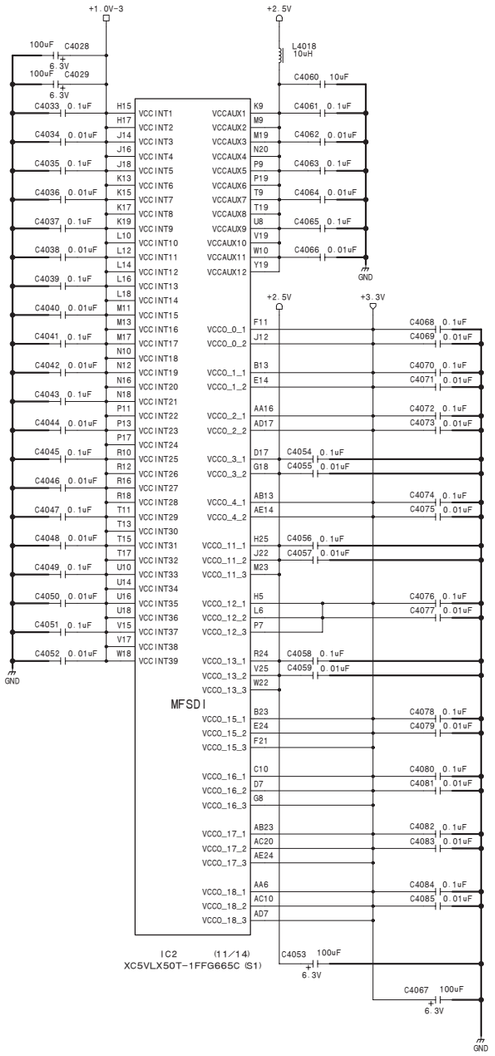

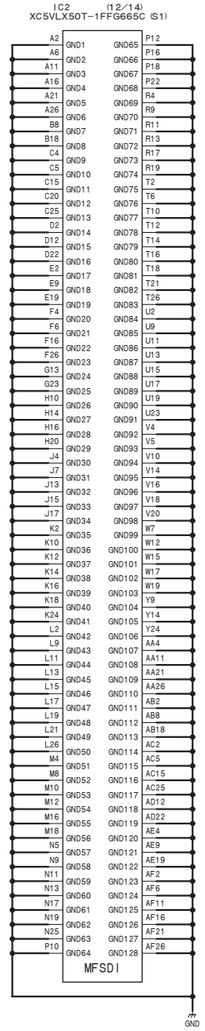

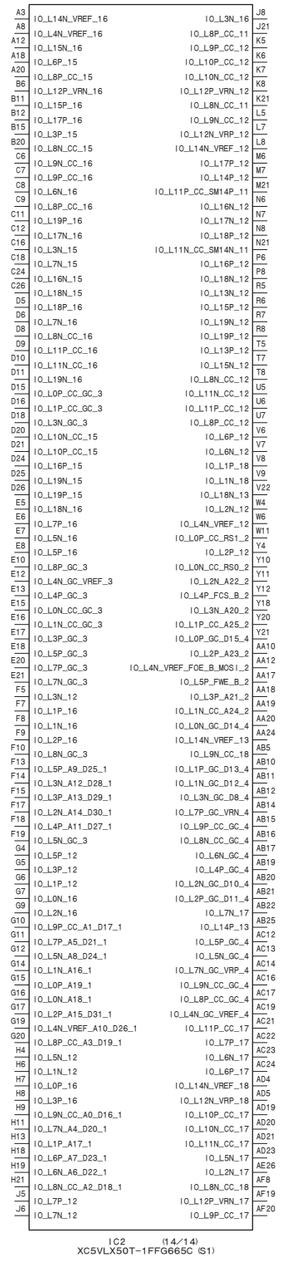



RIGHT

OUT-35 (40/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_40

OUT-35 (41/45)
SUFFIX: -12

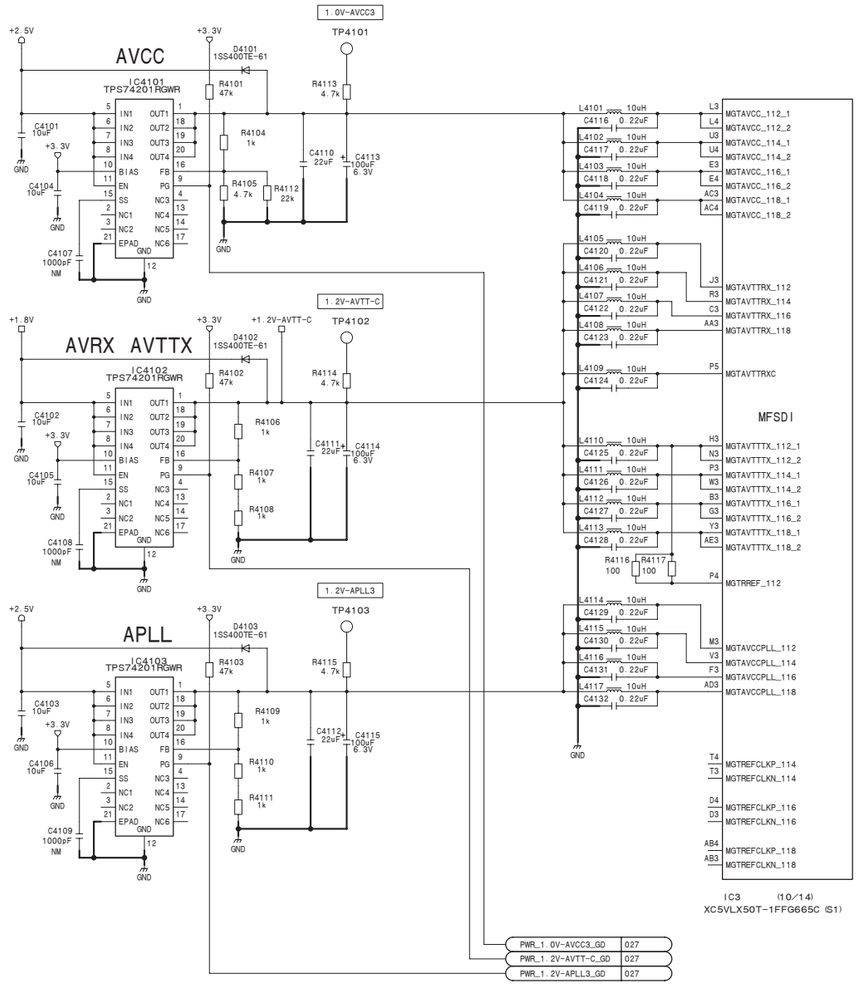

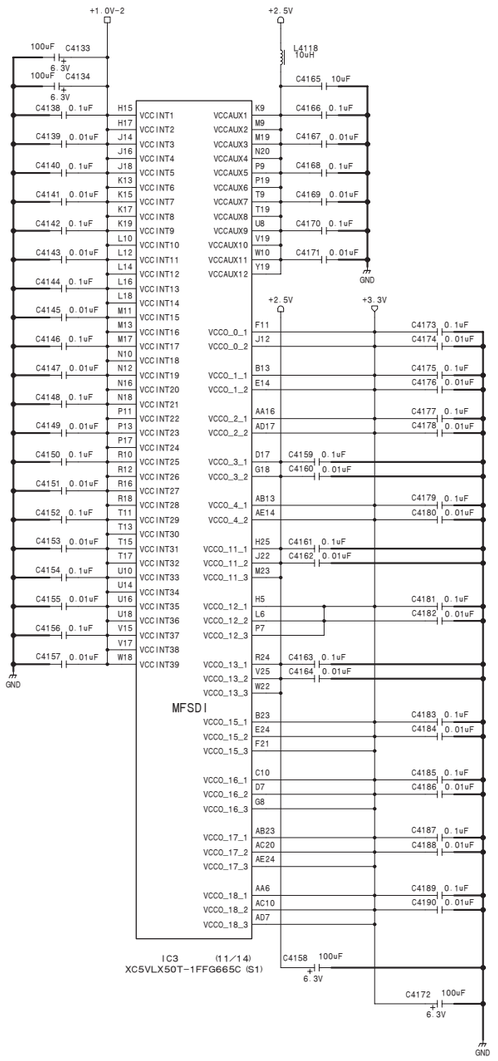



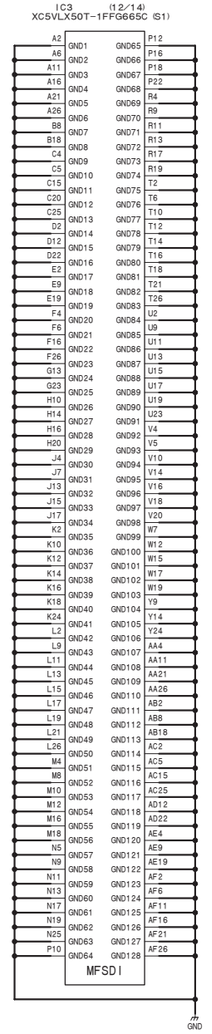

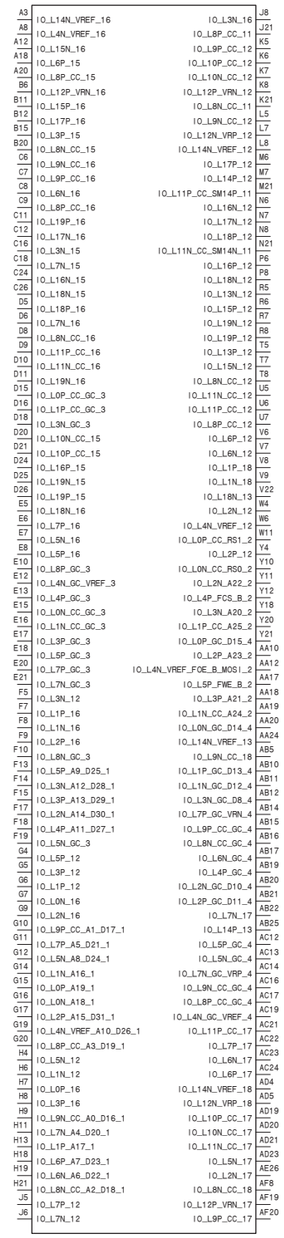

CENTER

OUT-35 (41/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_41

OUT-35 (42/45)
SUFFIX: -12

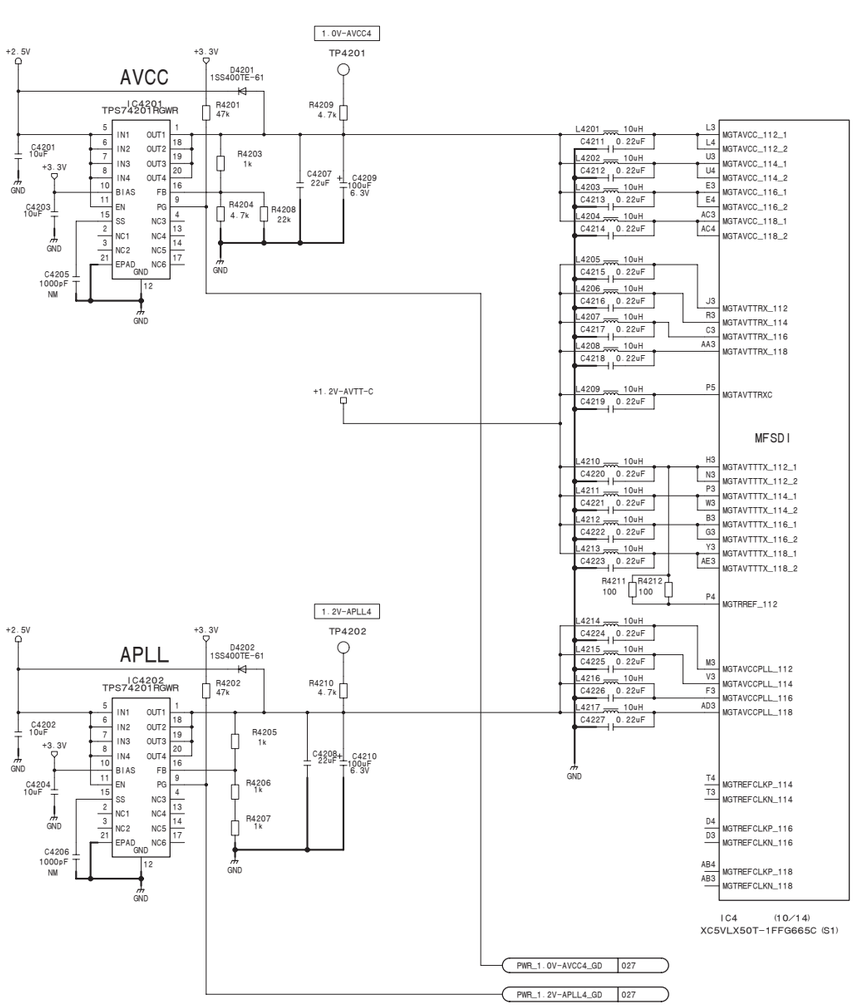

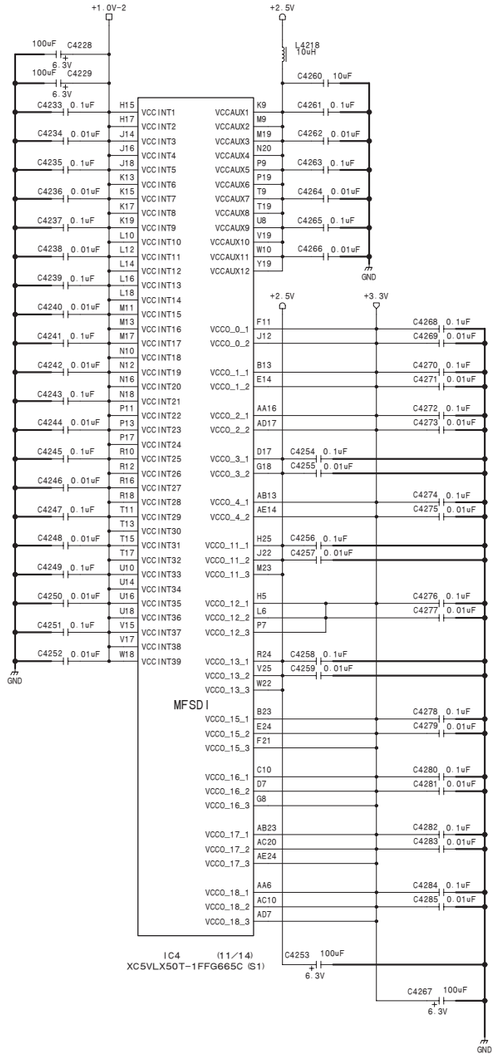

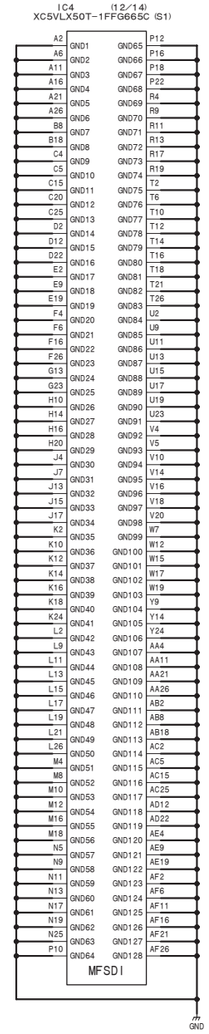

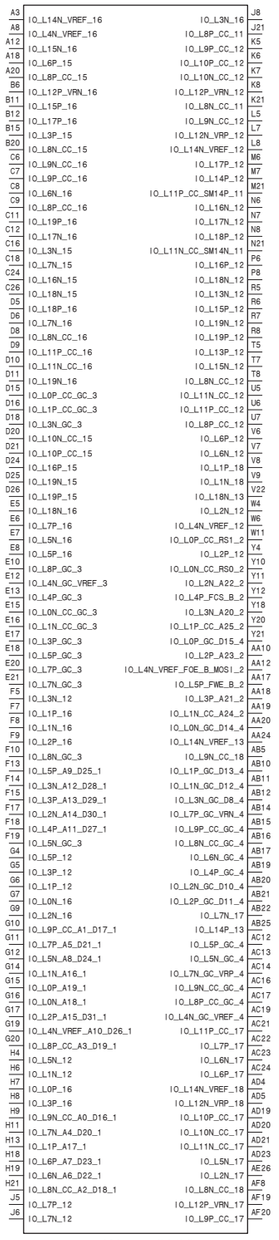



OUT-35 (42/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_42

CEN
TER

OUT-35 (43/45)
SUFFIX: -12

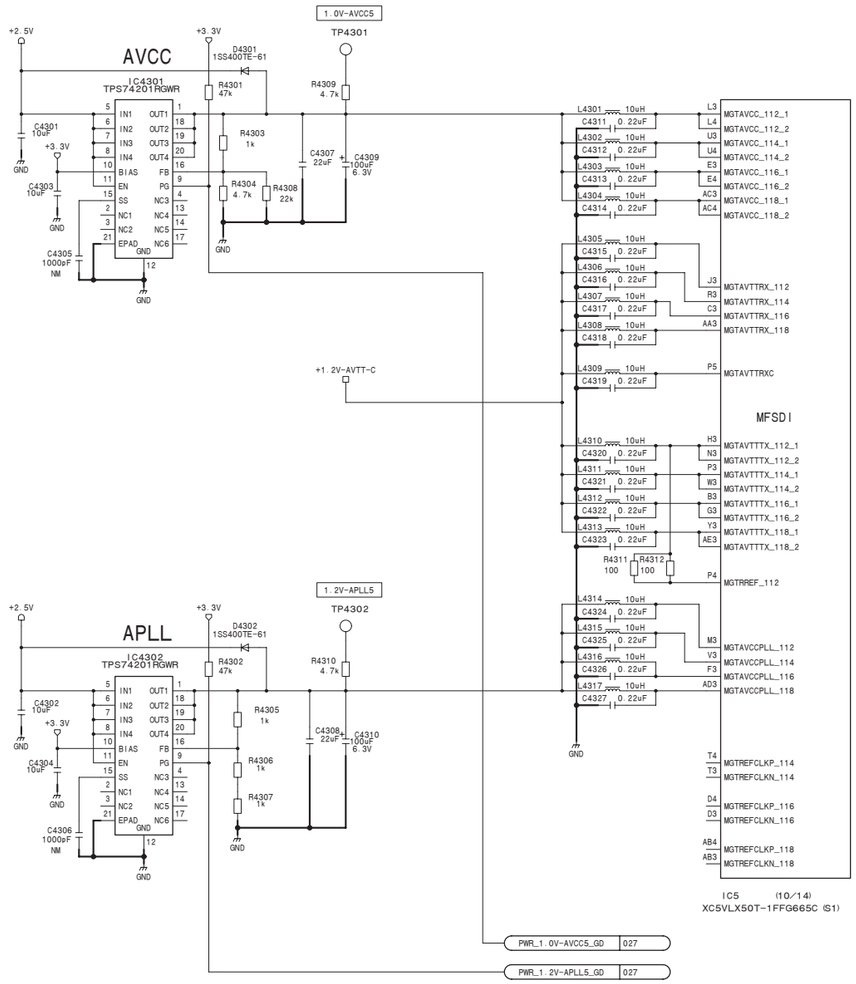

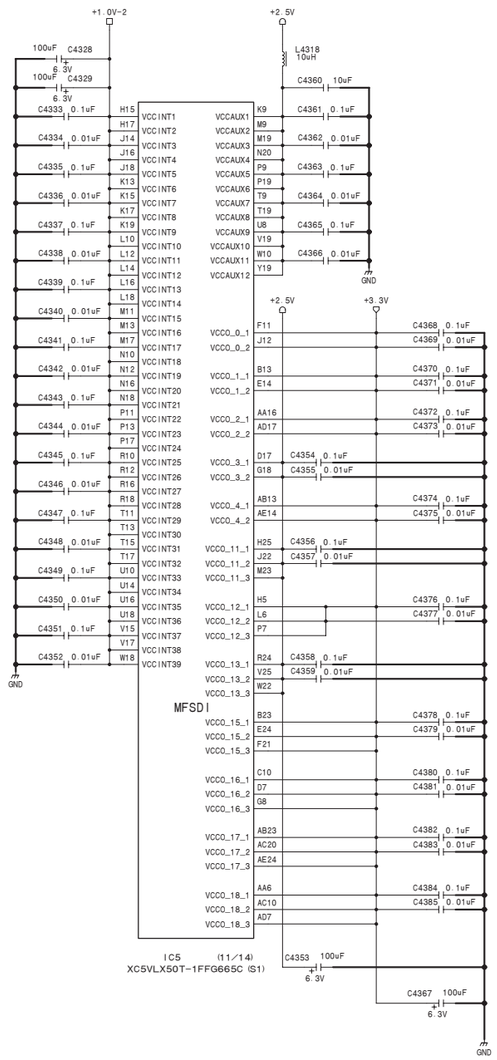



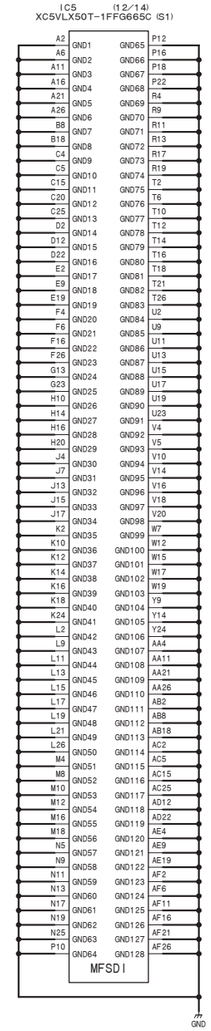



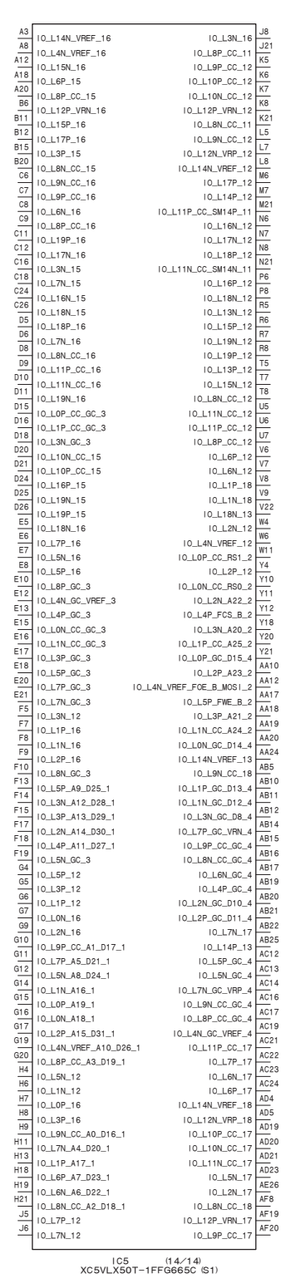

OUT-35 (43/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_43

CEN
TER

OUT-35 (44/45)
SUFFIX: -12

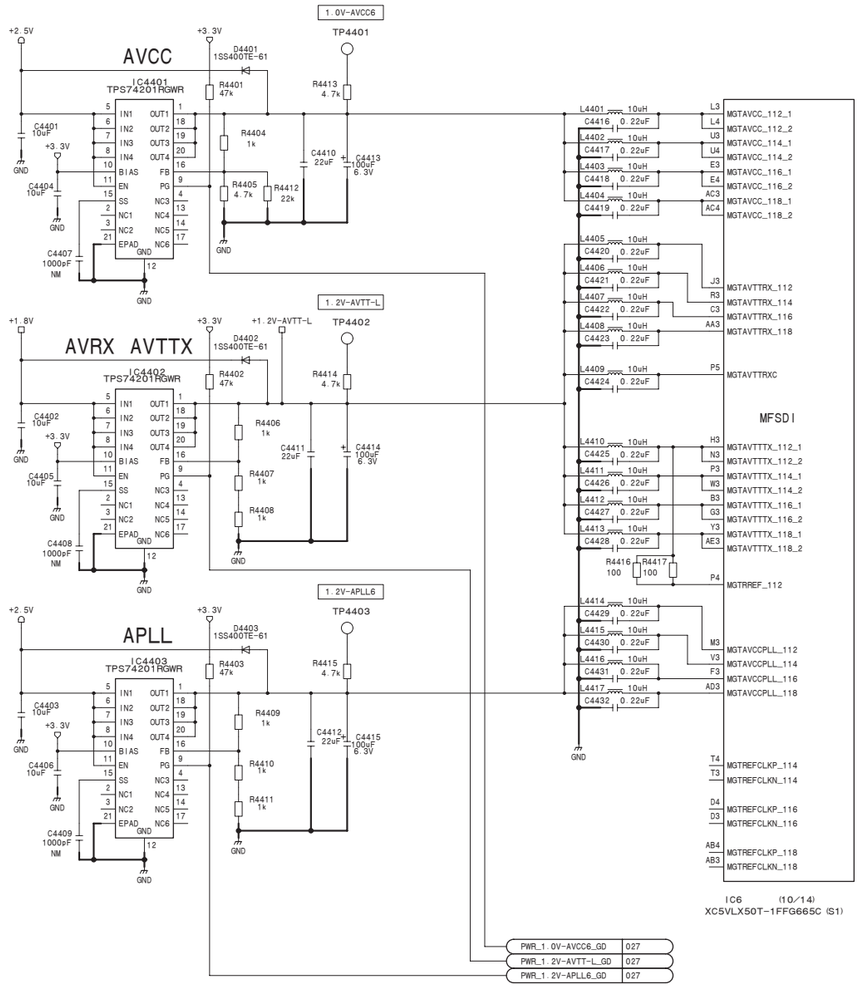

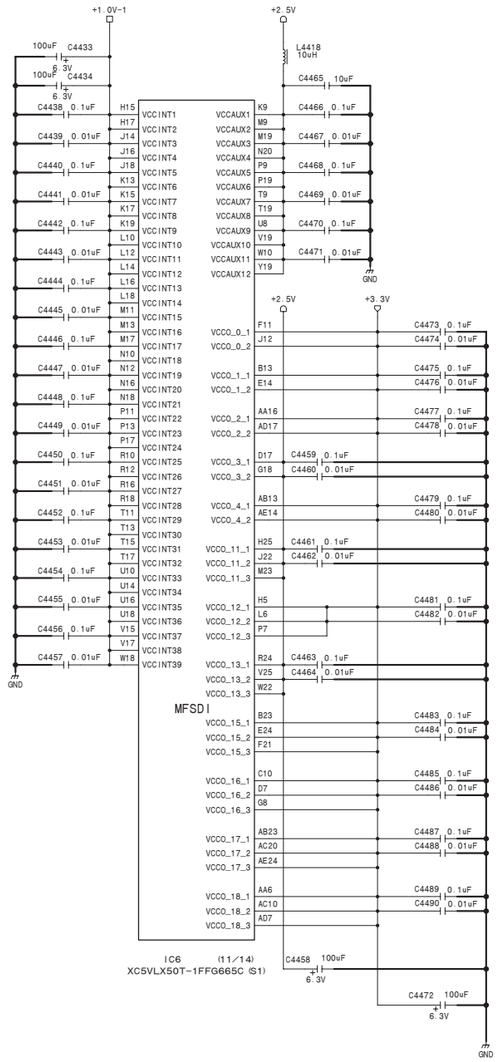

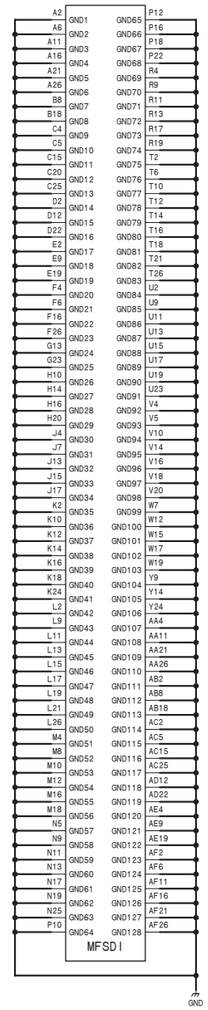

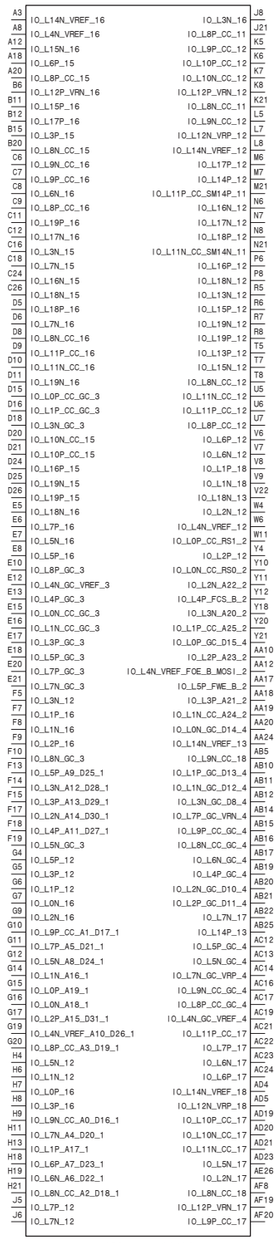

LEFT

4-278

OUT-35 (44/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_44

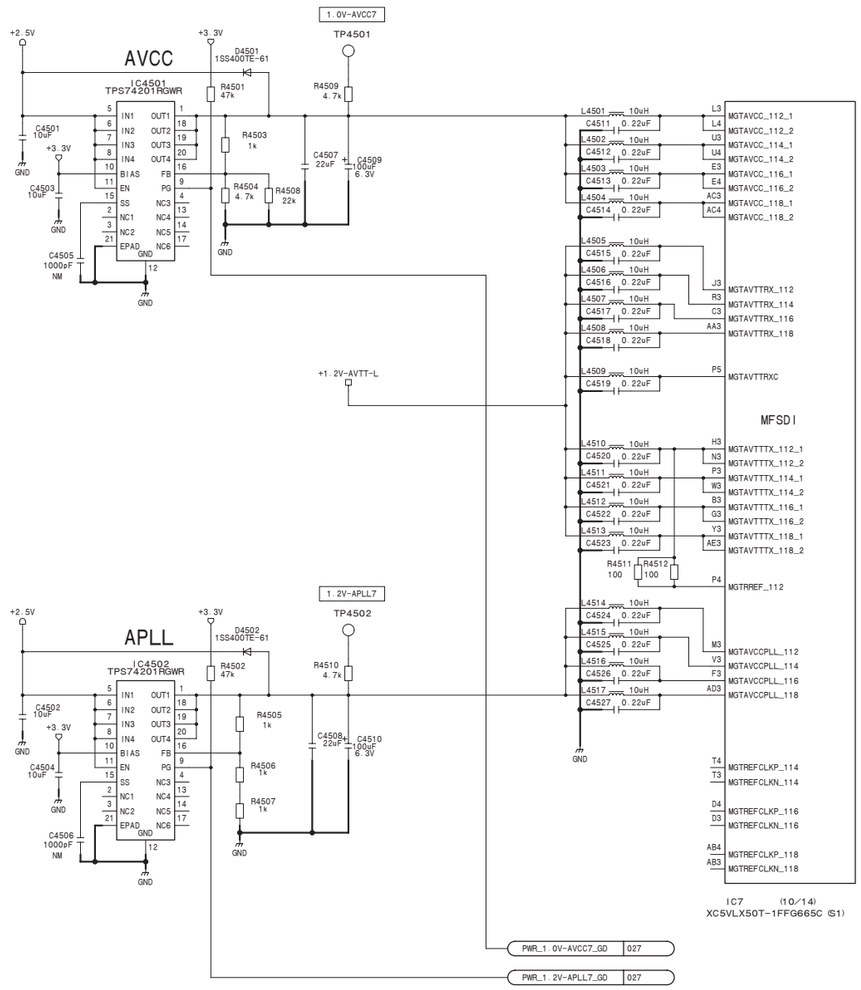

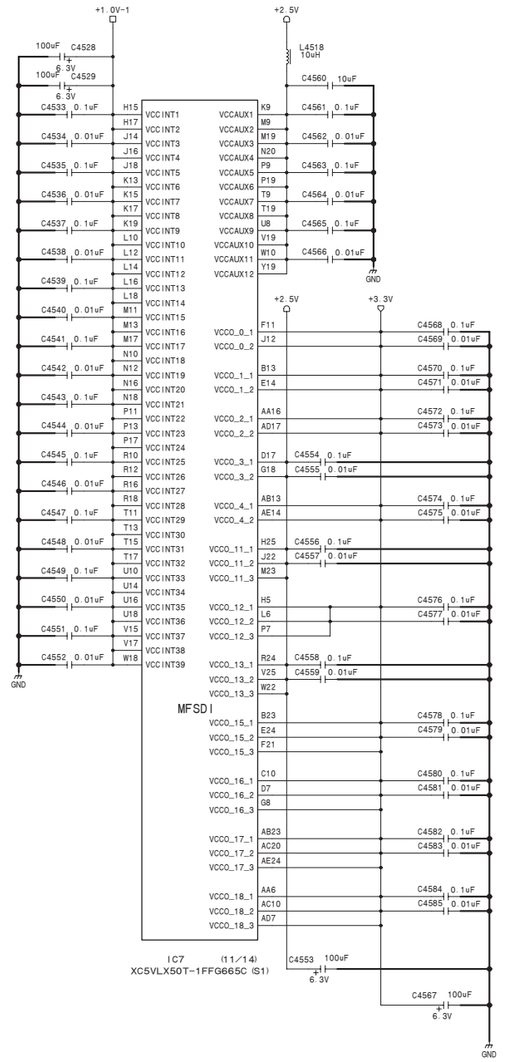

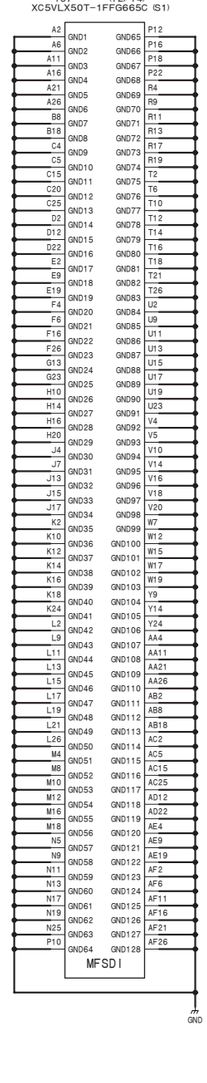

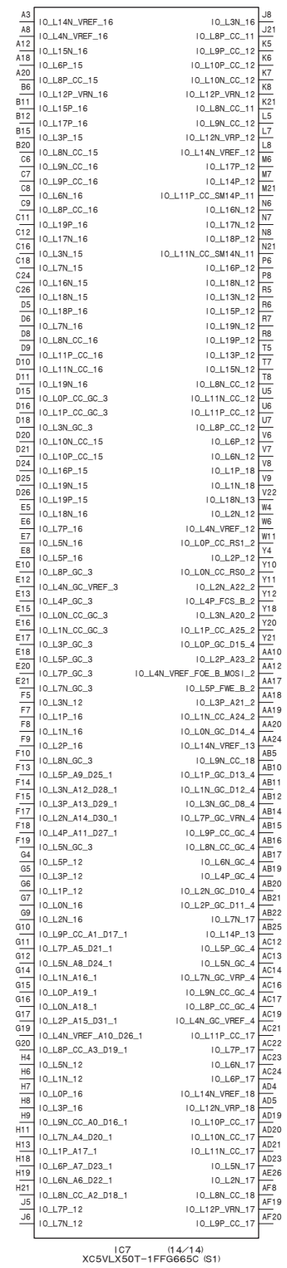

OUT-35 (45/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35_002_45

LEFT

OUT-35A (1/45)

SUFFIX: -12

OUT-35A (1/45)

SUFFIX: -12

Leftmost

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET	DC_ENBL	GND	SD/HD	FUSE+12V	GND
6	GND (BD_EXT_SLF)	(for Rear)	GND	(SD/HD)	(SD/HD)	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9	VCLKp	VCLKn	GND	I2C_SCL	I2C_SDA	GND
10	FDp	FDn	GND	VDp	VDn	GND

CNC1

	A	B	BG	C	D	DG
1	ADRS1	ADRS2	GND	ADRS3	ADRS4	GND
2	ADRS5	ADRS6	GND	ADRS7	ADRS8	GND
3	ADRS9	ADRS10	GND	ADRS11	ADRS12	GND
4	ADRS13	ADRS14	GND	ADRS15	ADRS16	GND
5	DATA0	DATA1	GND	DATA2	DATA3	GND
6	DATA4	DATA5	GND	DATA6	DATA7	GND
7	DATA8	DATA9	GND	DATA10	DATA11	GND
8	DATA12	DATA13	GND	DATA14	DATA15	GND
9	CPU_CLKp	CPU_CLKn	GND	CPU_CSAn	CPU_CSBn	GND
10	CPU_WEn	CPU_WAITn	GND	CPU_OEn	CPU_RESETn (CPU_AUX)	GND

CND1

	A	B	BG	C	D	DG
1			GND	CCR_IN4BP	CCR_IN4BN	GND
2	CCR_OUT4P	CCR_OUT4N	GND	CCR_IN4AP	CCR_IN4AN	GND
3			GND	CCR_IN3BP	CCR_IN3BN	GND
4	CCR_OUT3P	CCR_OUT3N	GND	CCR_IN3AP	CCR_IN3AN	GND
5			GND	CCR_IN2BP	CCR_IN2BN	GND
6	CCR_OUT2P	CCR_OUT2N	GND	CCR_IN2AP	CCR_IN2AN	GND
7			GND	CCR_IN1BP	CCR_IN1BN	GND
8	CCR_OUT1P	CCR_OUT1N	GND	CCR_IN1AP	CCR_IN1AN	GND
9			GND			GND
10			GND			GND

NM

CNE1

	A	B	BG	C	D	DG
1	OUT24BP	OUT24BN	GND	OUT24_INBP	OUT24_INBN	GND
2	OUT24AP	OUT24AN	GND	OUT24_INAP	OUT24_INAN	GND
3			GND			GND
4	OUT23BP	OUT23BN	GND	OUT23_INBP	OUT23_INBN	GND
5	OUT23AP	OUT23AN	GND	OUT23_INAP	OUT23_INAN	GND
6	(OUT22BP)	(OUT22BN)	GND	OUT22_INBP	OUT22_INBN	GND
7	OUT22AP	OUT22AN	GND	OUT22_INAP	OUT22_INAN	GND
8			GND			GND
9	(OUT21BP)	(OUT21BN)	GND	OUT21_INBP	OUT21_INBN	GND
10	OUT21AP	OUT21AN	GND	OUT21_INAP	OUT21_INAN	GND

CNG1

	A	B	BG	C	D	DG
1	(OUT20BP)	(OUT20BN)	GND	OUT20_INBP	OUT20_INBN	GND
2	OUT20AP	OUT20AN	GND	OUT20_INAP	OUT20_INAN	GND
3	(OUT19BP)	(OUT19BN)	GND	OUT19_INBP	OUT19_INBN	GND
4	OUT19AP	OUT19AN	GND	OUT19_INAP	OUT19_INAN	GND
5	(OUT18BP)	(OUT18BN)	GND	OUT18_INBP	OUT18_INBN	GND
6	OUT18AP	OUT18AN	GND	OUT18_INAP	OUT18_INAN	GND
7	(OUT17BP)	(OUT17BN)	GND	OUT17_INBP	OUT17_INBN	GND
8	OUT17AP	OUT17AN	GND	OUT17_INAP	OUT17_INAN	GND
9	MSD_OUT1BP	MSD_OUT1BN	GND			GND
10	MSD_OUT1AP	MSD_OUT1AN	GND			GND

CNK1

	A	B	BG	C	D	DG
1	(OUT16BP)	(OUT16BN)	GND	OUT16_INBP	OUT16_INBN	GND
2	OUT16AP	OUT16AN	GND	OUT16_INAP	OUT16_INAN	GND
3			GND			GND
4	(OUT15BP)	(OUT15BN)	GND	OUT15_INBP	OUT15_INBN	GND
5	OUT15AP	OUT15AN	GND	OUT15_INAP	OUT15_INAN	GND
6	(OUT14BP)	(OUT14BN)	GND	OUT14_INBP	OUT14_INBN	GND
7	OUT14AP	OUT14AN	GND	OUT14_INAP	OUT14_INAN	GND
8			GND			GND
9	(OUT13BP)	(OUT13BN)	GND	OUT13_INBP	OUT13_INBN	GND
10	OUT13AP	OUT13AN	GND	OUT13_INAP	OUT13_INAN	GND

CNL1

	A	B	BG	C	D	DG
1	(OUT12BP)	(OUT12BN)	GND	OUT12_INBP	OUT12_INBN	GND
2	OUT12AP	OUT12AN	GND	OUT12_INAP	OUT12_INAN	GND
3			GND			GND
4	(OUT11BP)	(OUT11BN)	GND	OUT11_INBP	OUT11_INBN	GND
5	OUT11AP	OUT11AN	GND	OUT11_INAP	OUT11_INAN	GND
6	(OUT10BP)	(OUT10BN)	GND	OUT10_INBP	OUT10_INBN	GND
7	OUT10AP	OUT10AN	GND	OUT10_INAP	OUT10_INAN	GND
8			GND			GND
9	(OUT09BP)	(OUT09BN)	GND	OUT09_INBP	OUT09_INBN	GND
10	OUT09AP	OUT09AN	GND	OUT09_INAP	OUT09_INAN	GND

CNN1

	A	B	BG	C	D	DG
1	(OUT08BP)	(OUT08BN)	GND	OUT08_INBP	OUT08_INBN	GND
2	OUT08AP	OUT08AN	GND	OUT08_INAP	OUT08_INAN	GND
3			GND			GND
4	(OUT07BP)	(OUT07BN)	GND	OUT07_INBP	OUT07_INBN	GND
5	OUT07AP	OUT07AN	GND	OUT07_INAP	OUT07_INAN	GND
6	(OUT06BP)	(OUT06BN)	GND	OUT06_INBP	OUT06_INBN	GND
7	OUT06AP	OUT06AN	GND	OUT06_INAP	OUT06_INAN	GND
8			GND			GND
9	(OUT05BP)	(OUT05BN)	GND	OUT05_INBP	OUT05_INBN	GND
10	OUT05AP	OUT05AN	GND	OUT05_INAP	OUT05_INAN	GND

CNP1

	A	B	BG	C	D	DG
1	(OUT04BP)	(OUT04BN)	GND	OUT04_INBP	OUT04_INBN	GND
2	OUT04AP	OUT04AN	GND	OUT04_INAP	OUT04_INAN	GND
3	(OUT03BP)	(OUT03BN)	GND	OUT03_INBP	OUT03_INBN	GND
4	OUT03AP	OUT03AN	GND	OUT03_INAP	OUT03_INAN	GND
5	(OUT02BP)	(OUT02BN)	GND	OUT02_INBP	OUT02_INBN	GND
6	OUT02AP	OUT02AN	GND	OUT02_INAP	OUT02_INAN	GND
7	(OUT01BP)	(OUT01BN)	GND	OUT01_INBP	OUT01_INBN	GND
8	OUT01AP	OUT01AN	GND	OUT01_INAP	OUT01_INAN	GND
9	FC_OUT2P	FC_OUT2N	GND			GND
10	FC_OUT1P	FC_OUT1N	GND			GND

Rightmost

OUT-35A (1/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_1

OUT-35A (2/45)

SUFFIX: -12

OUT-35A (2/45)

SUFFIX: -12

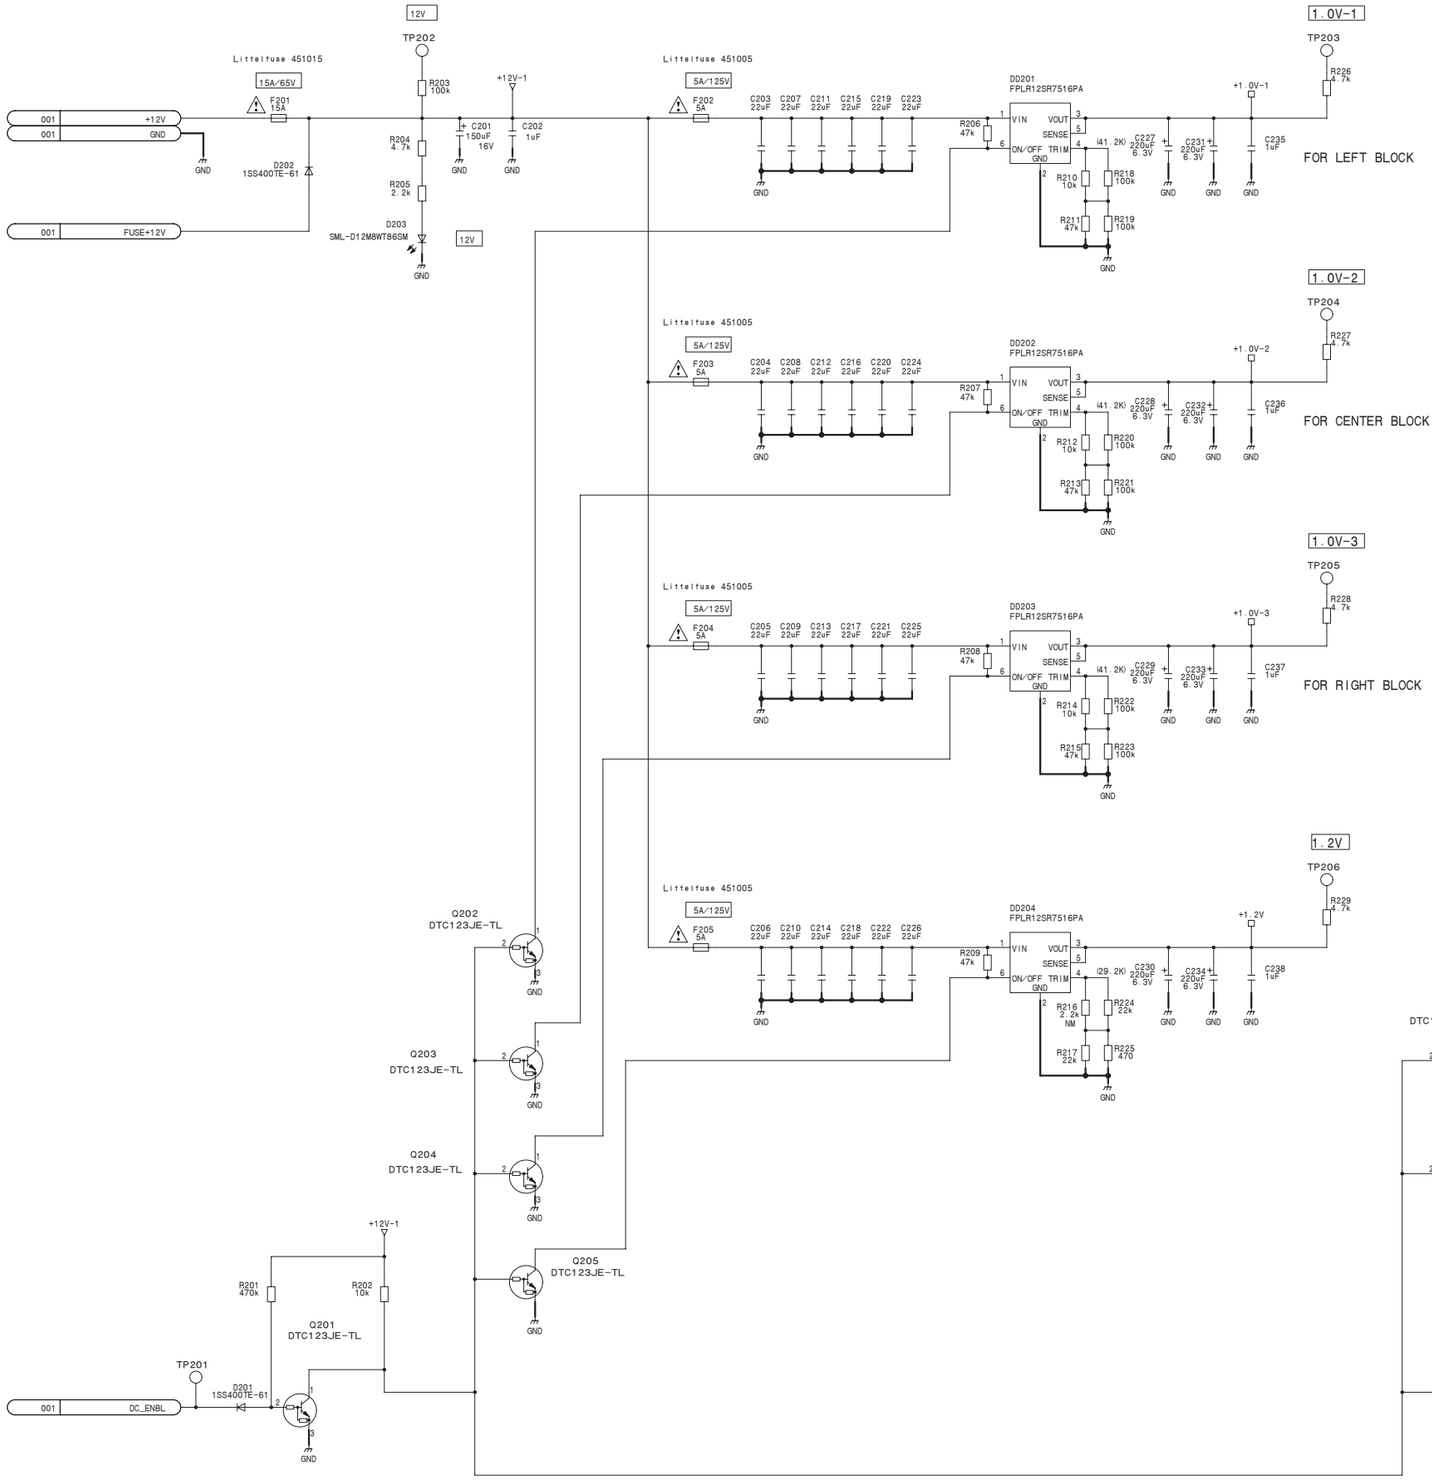

OUT-35A (2/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_2

OUT-35A (3/45)

SUFFIX: -12

OUT-35A (3/45)

SUFFIX: -12

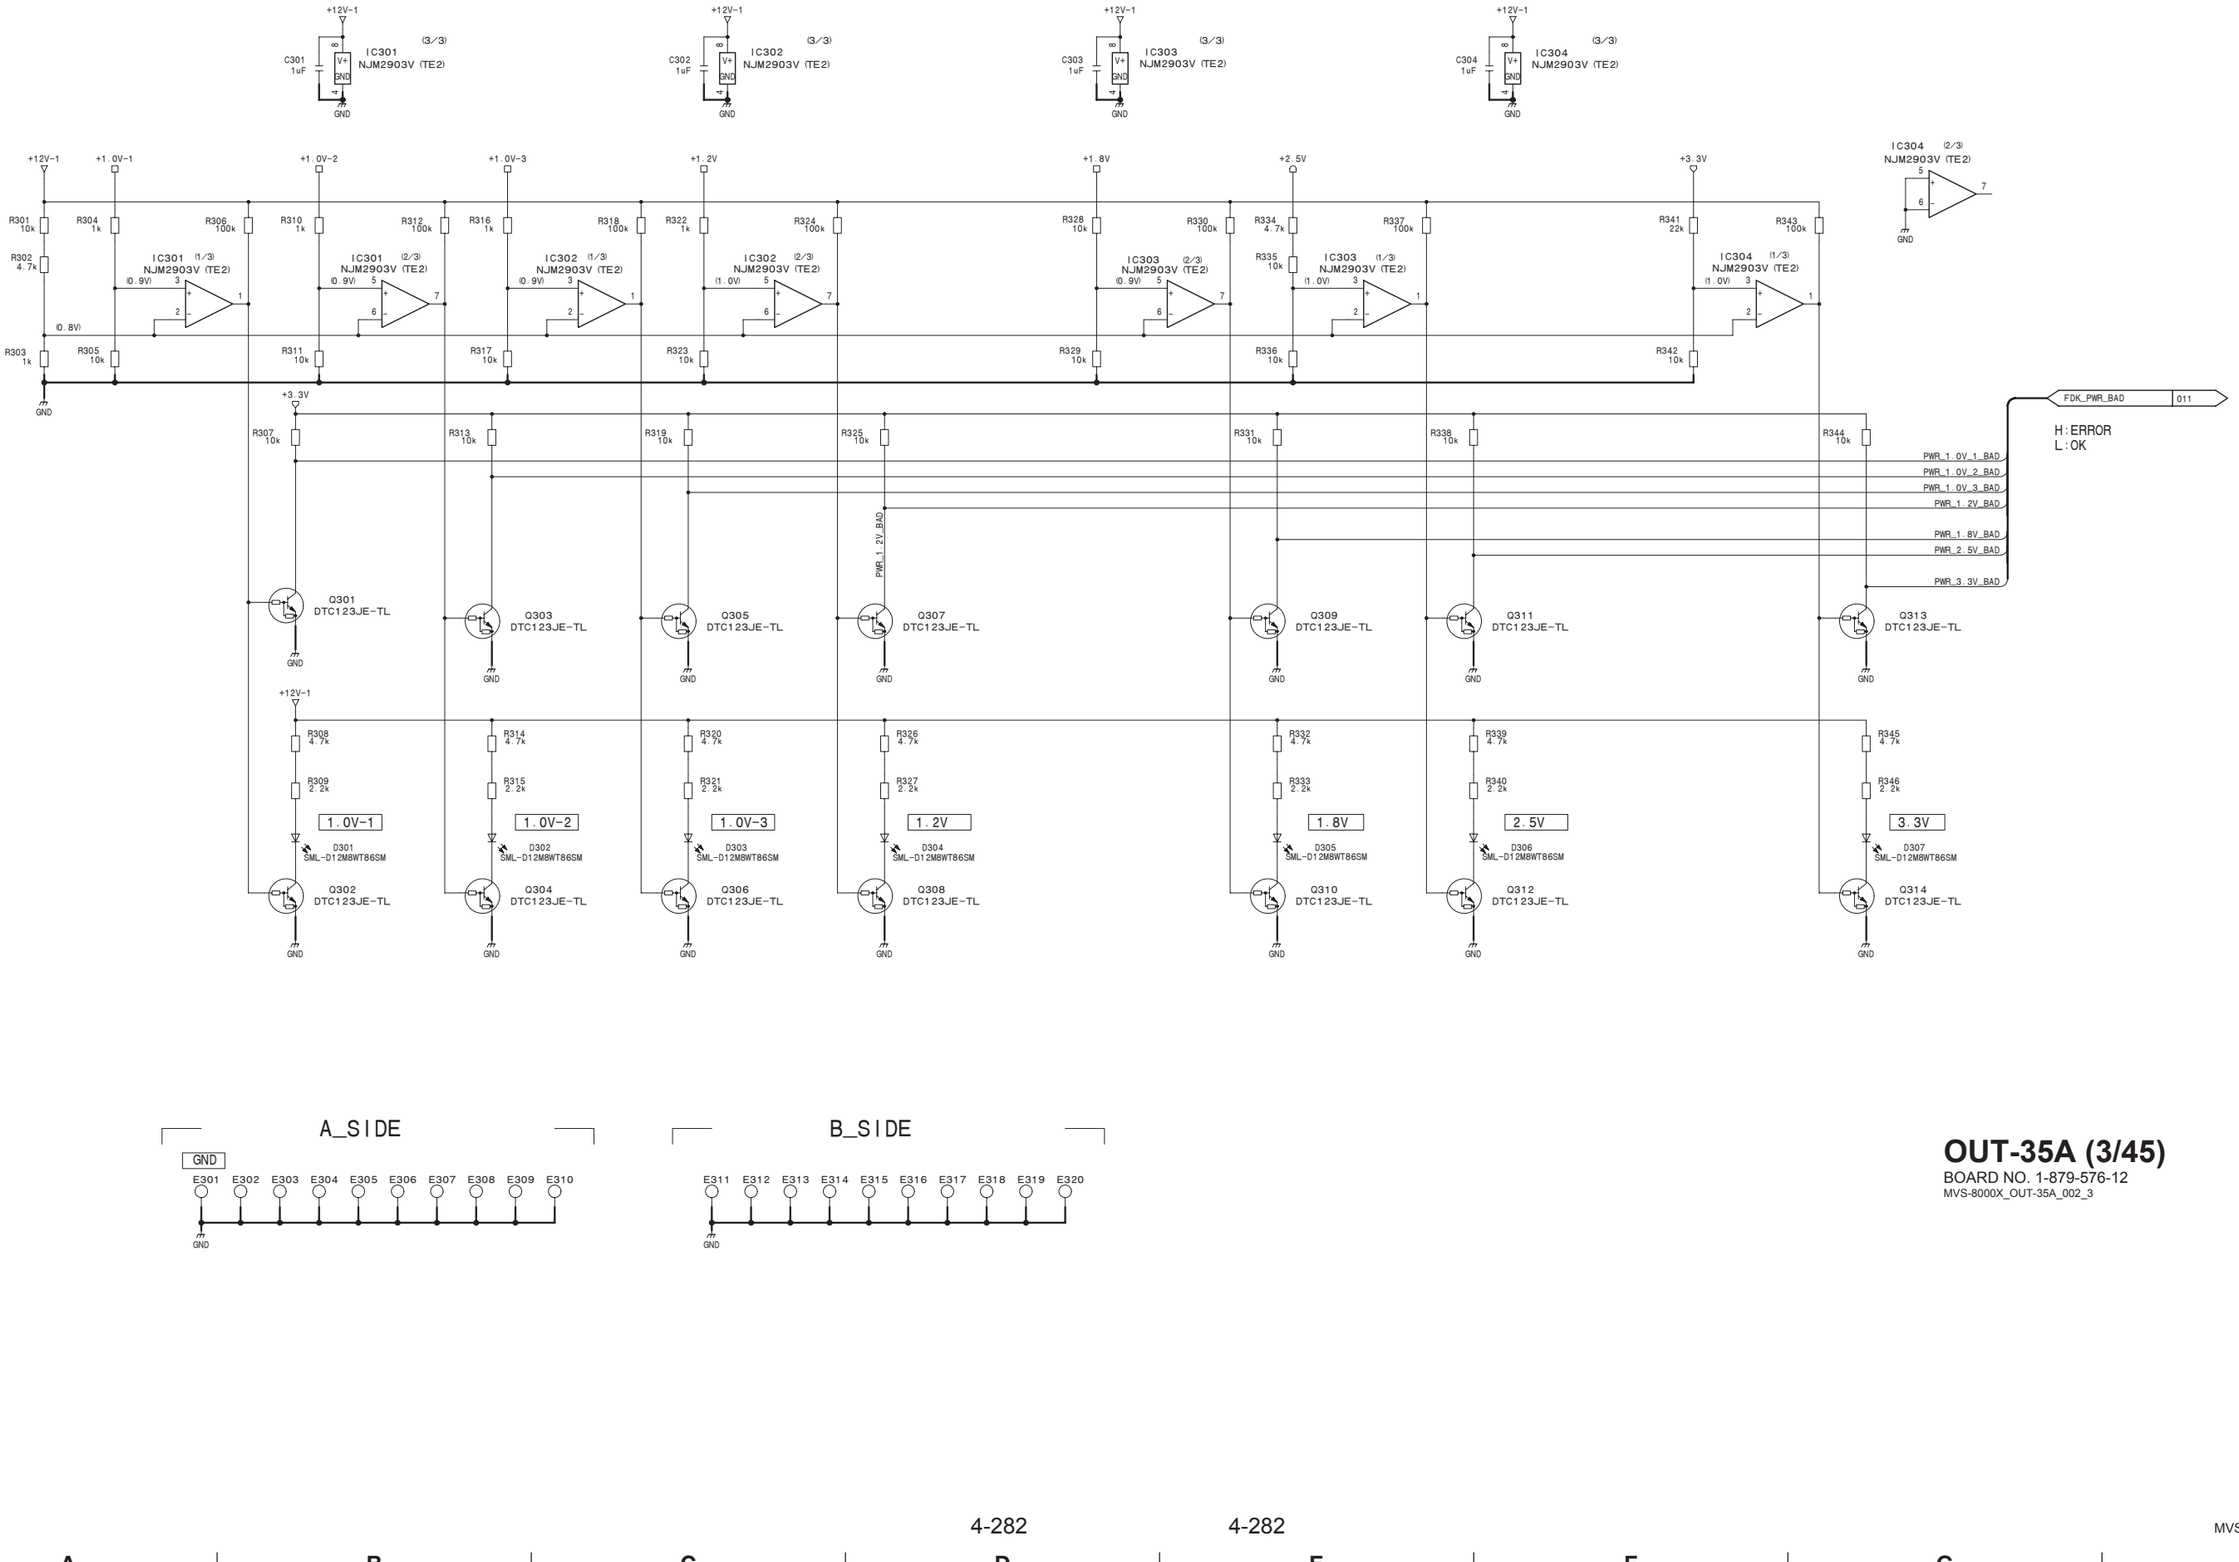

OUT-35A (3/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_3

OUT-35A (4/45)

SUFFIX: -12

OUT-35A (4/45)

SUFFIX: -12

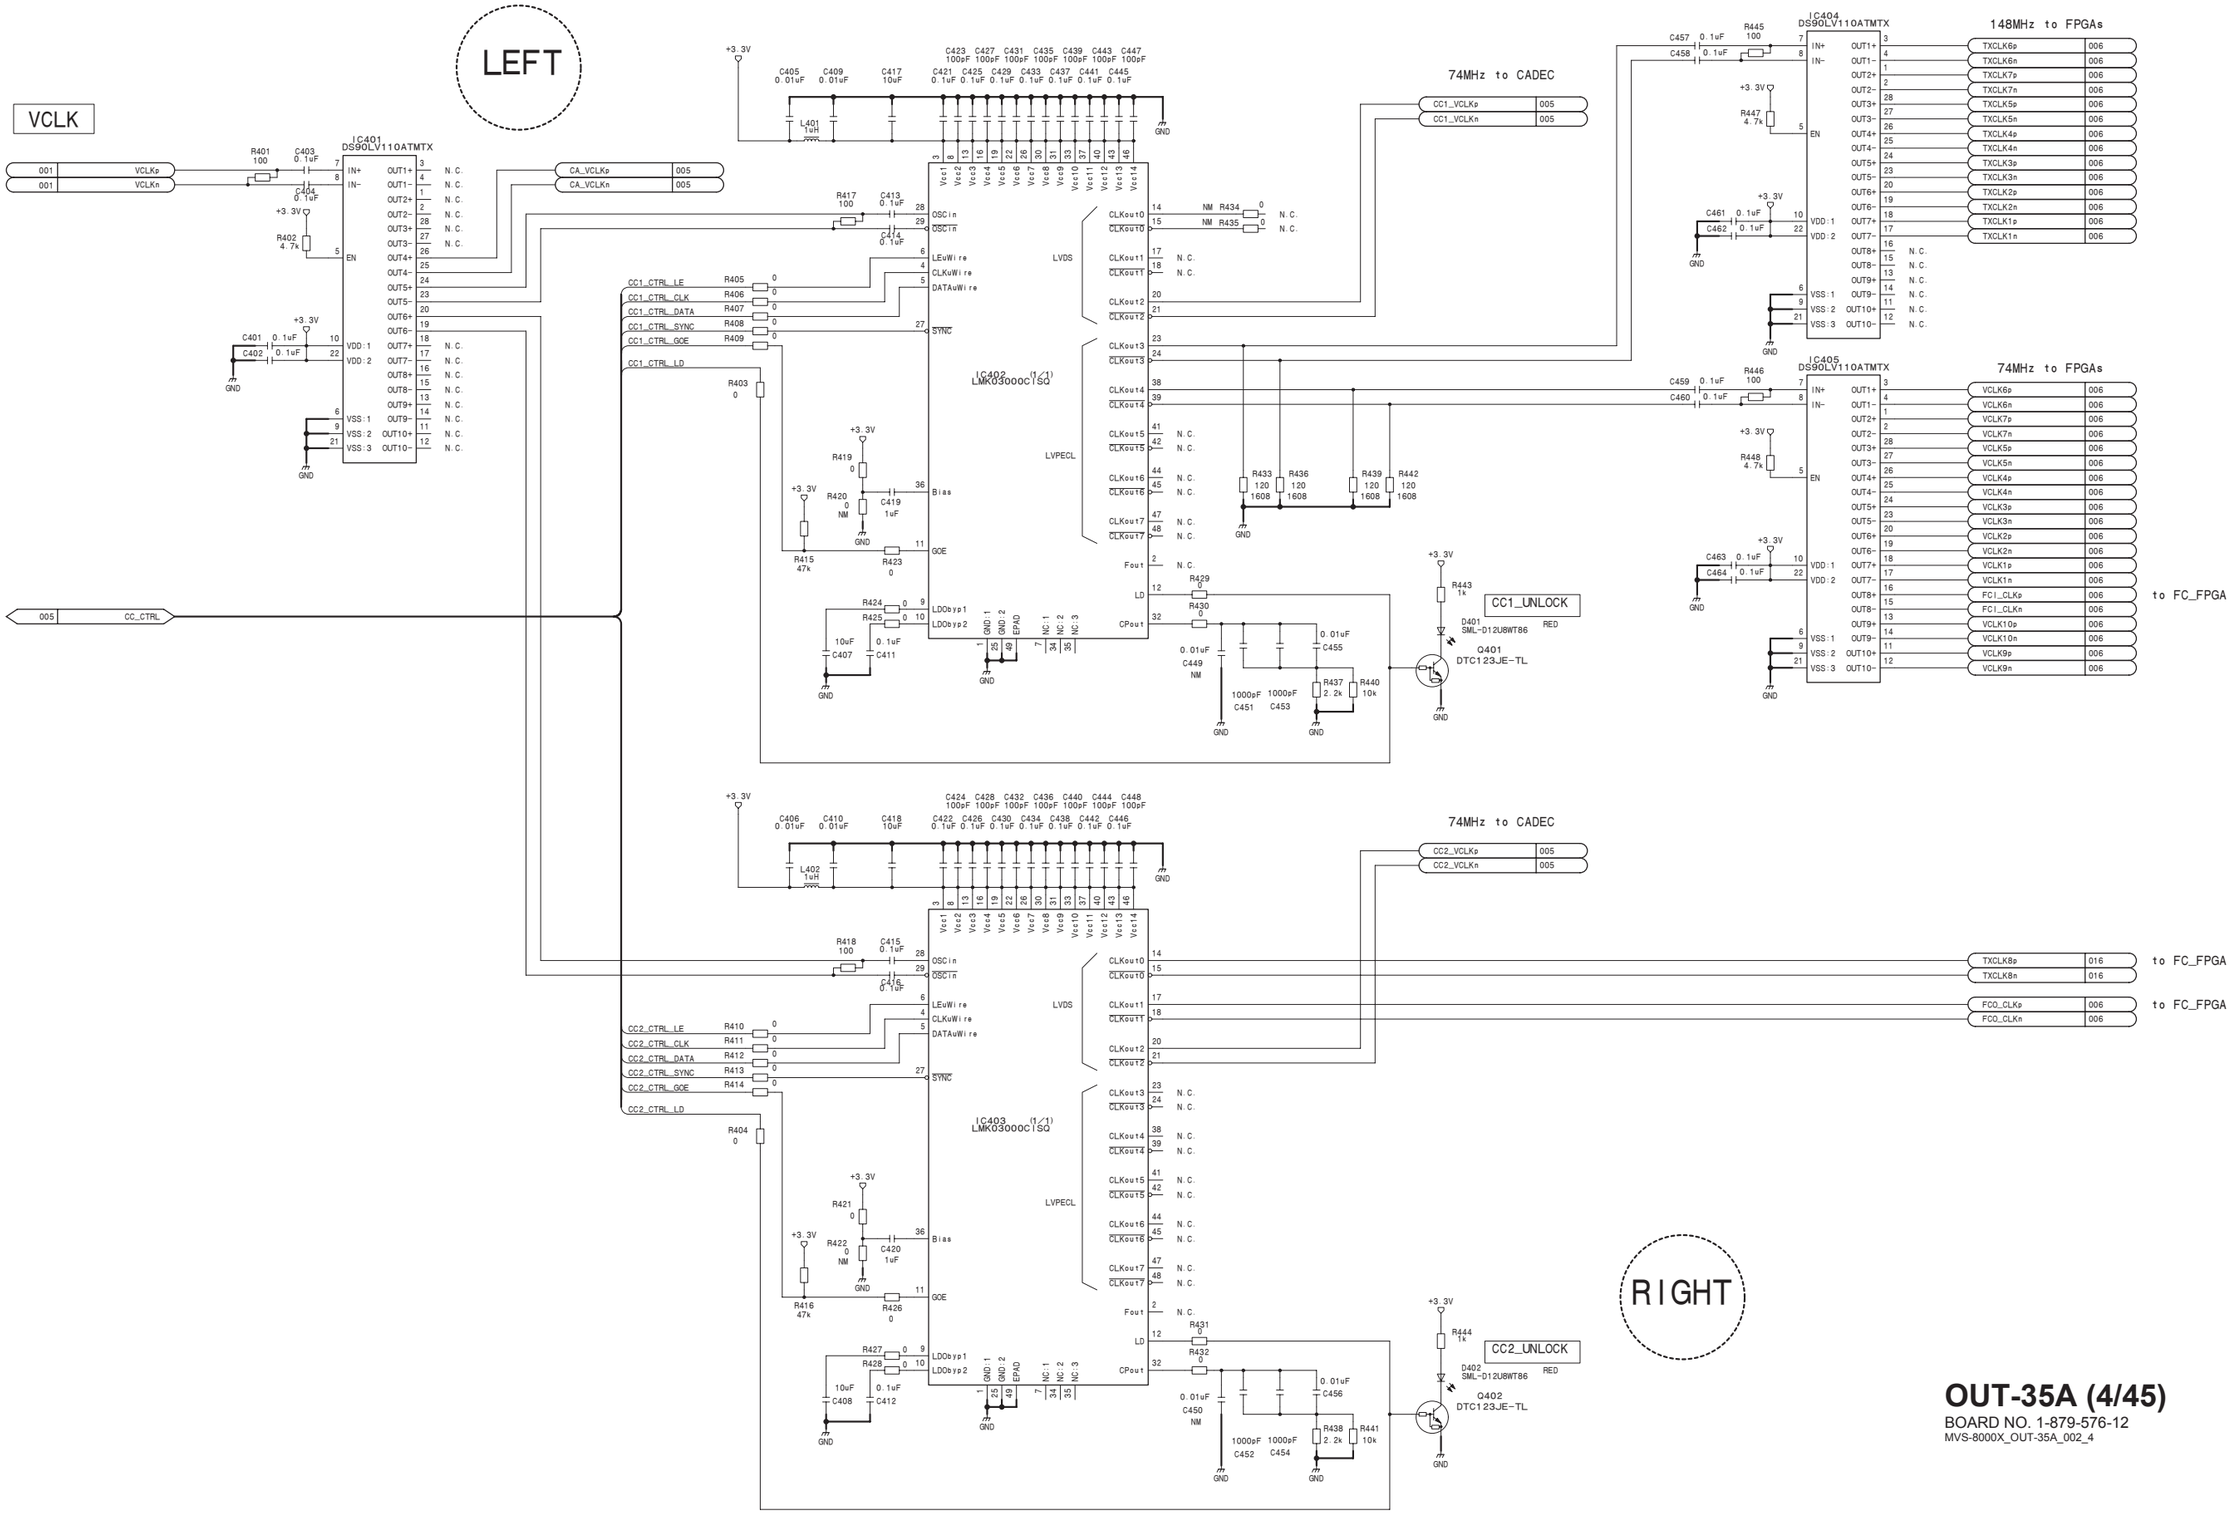

OUT-35A (4/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_4

OUT-35A (5/45)

SUFFIX: -12

OUT-35A (5/45)

SUFFIX: -12

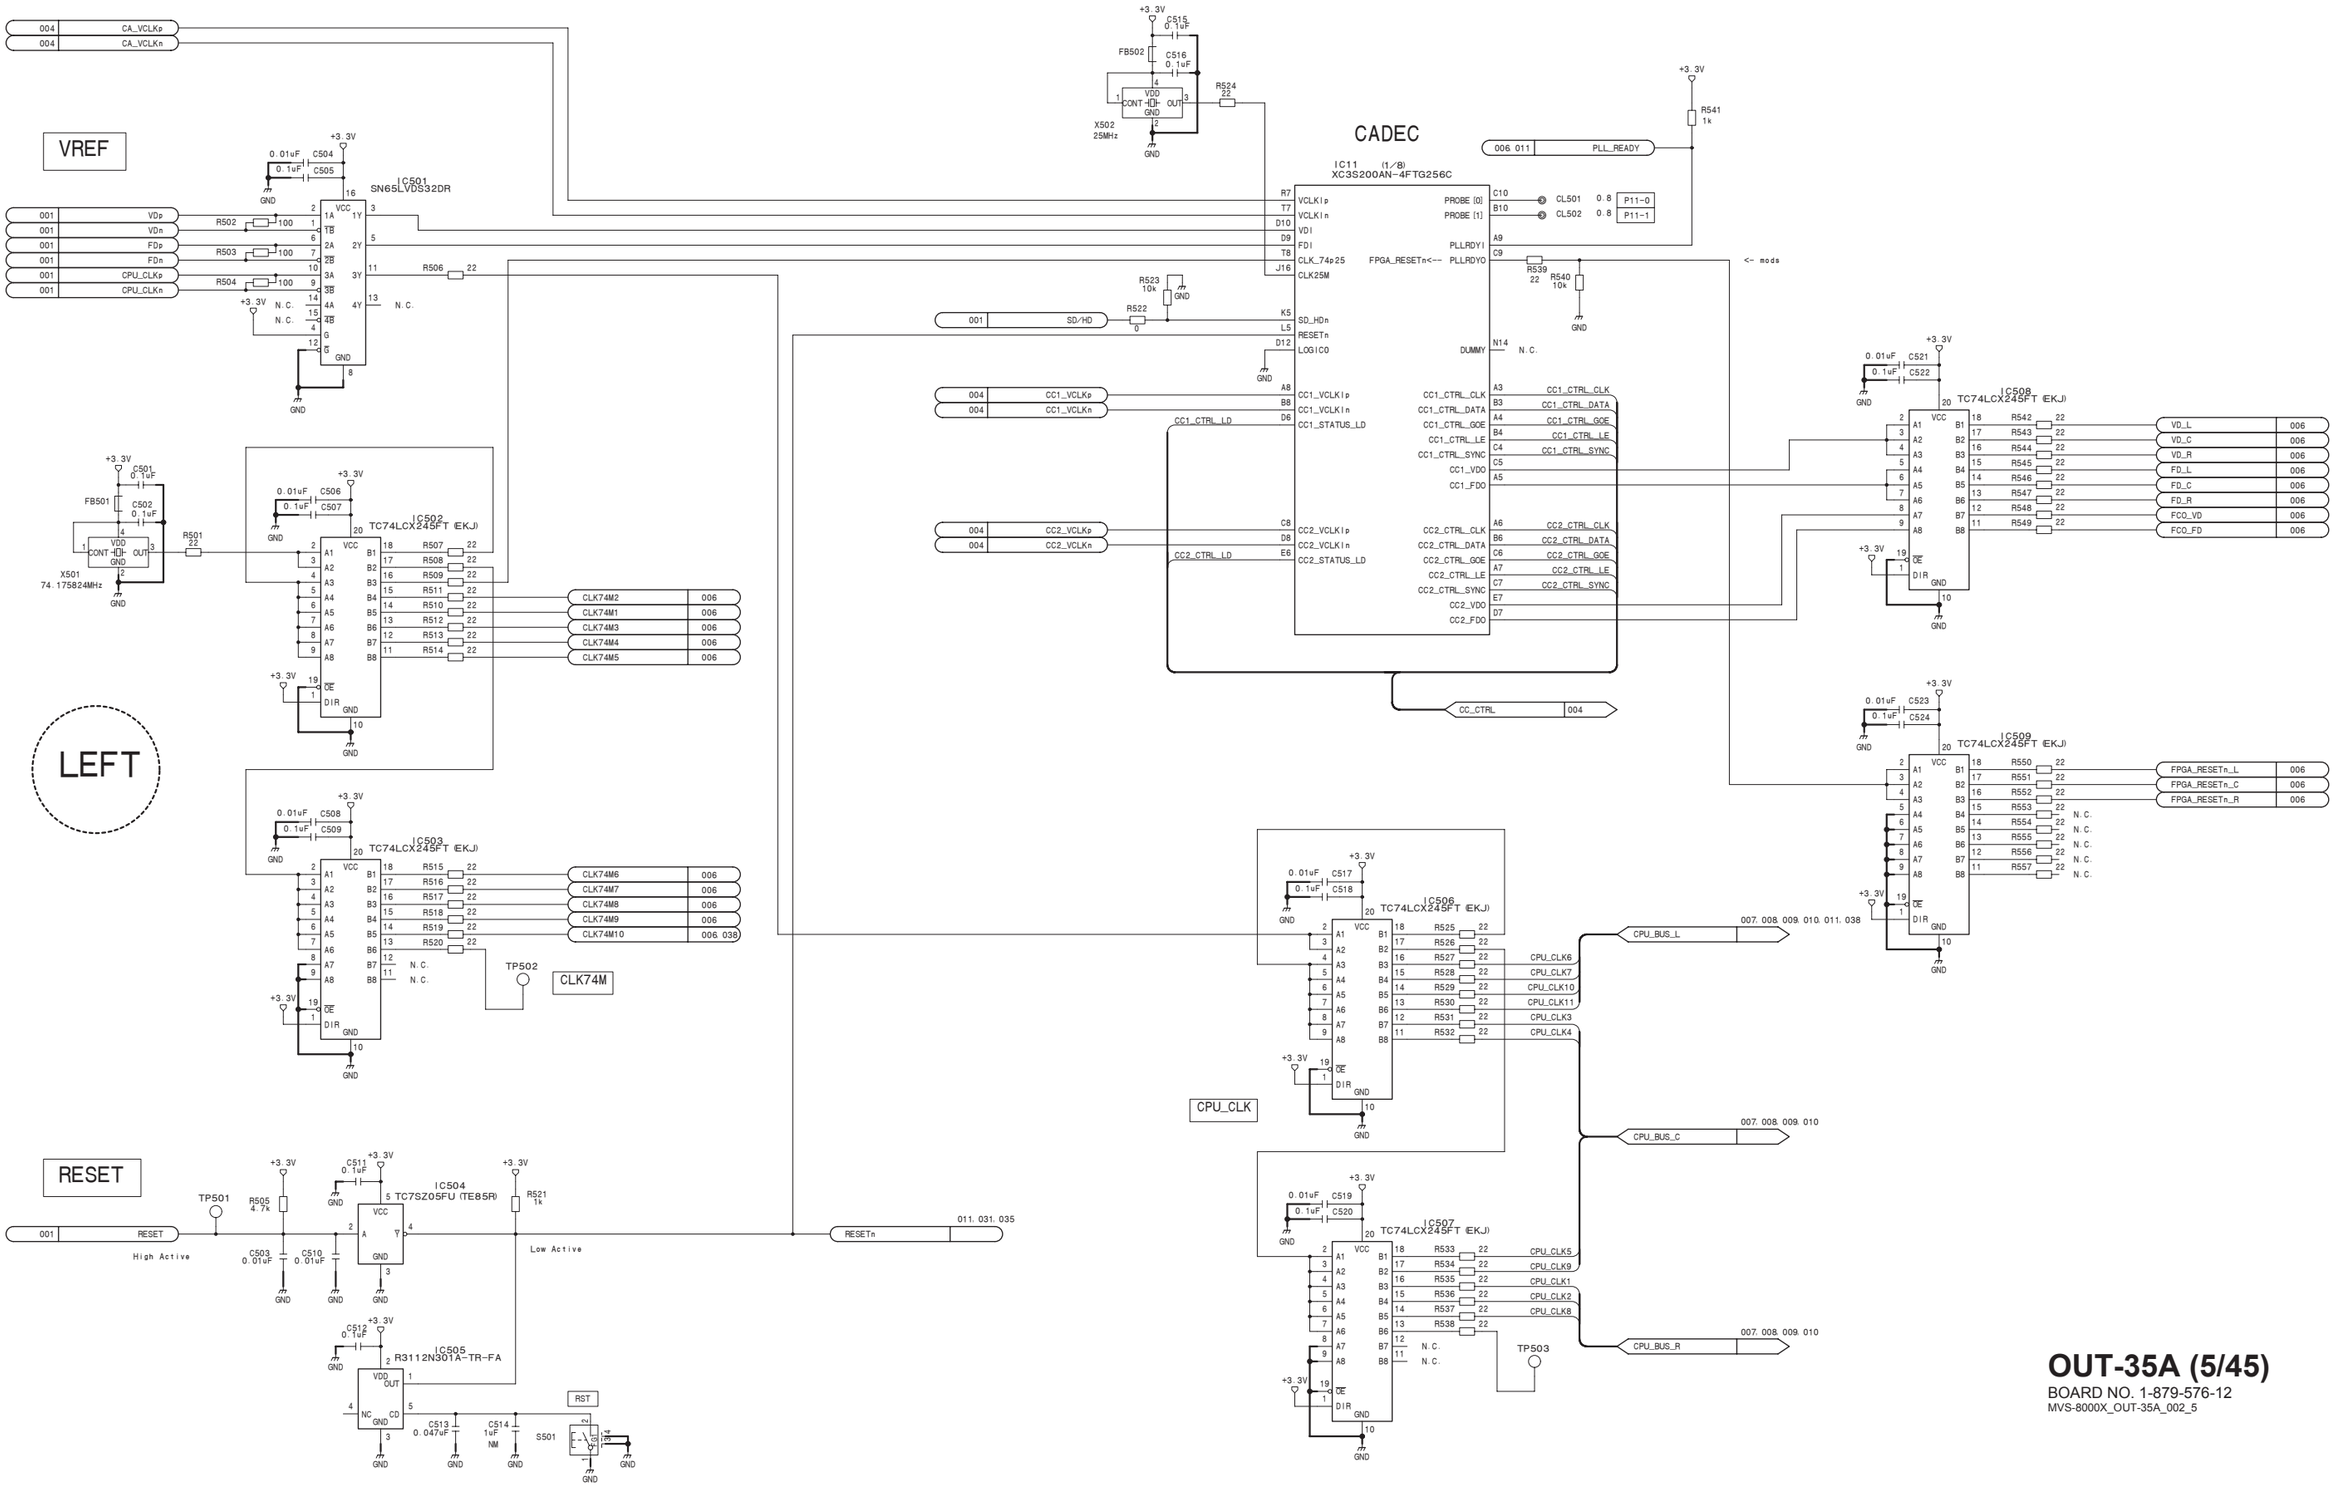

OUT-35A (5/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_5

OUT-35A (6/45)

SUFFIX: -12

OUT-35A (6/45)

SUFFIX: -12

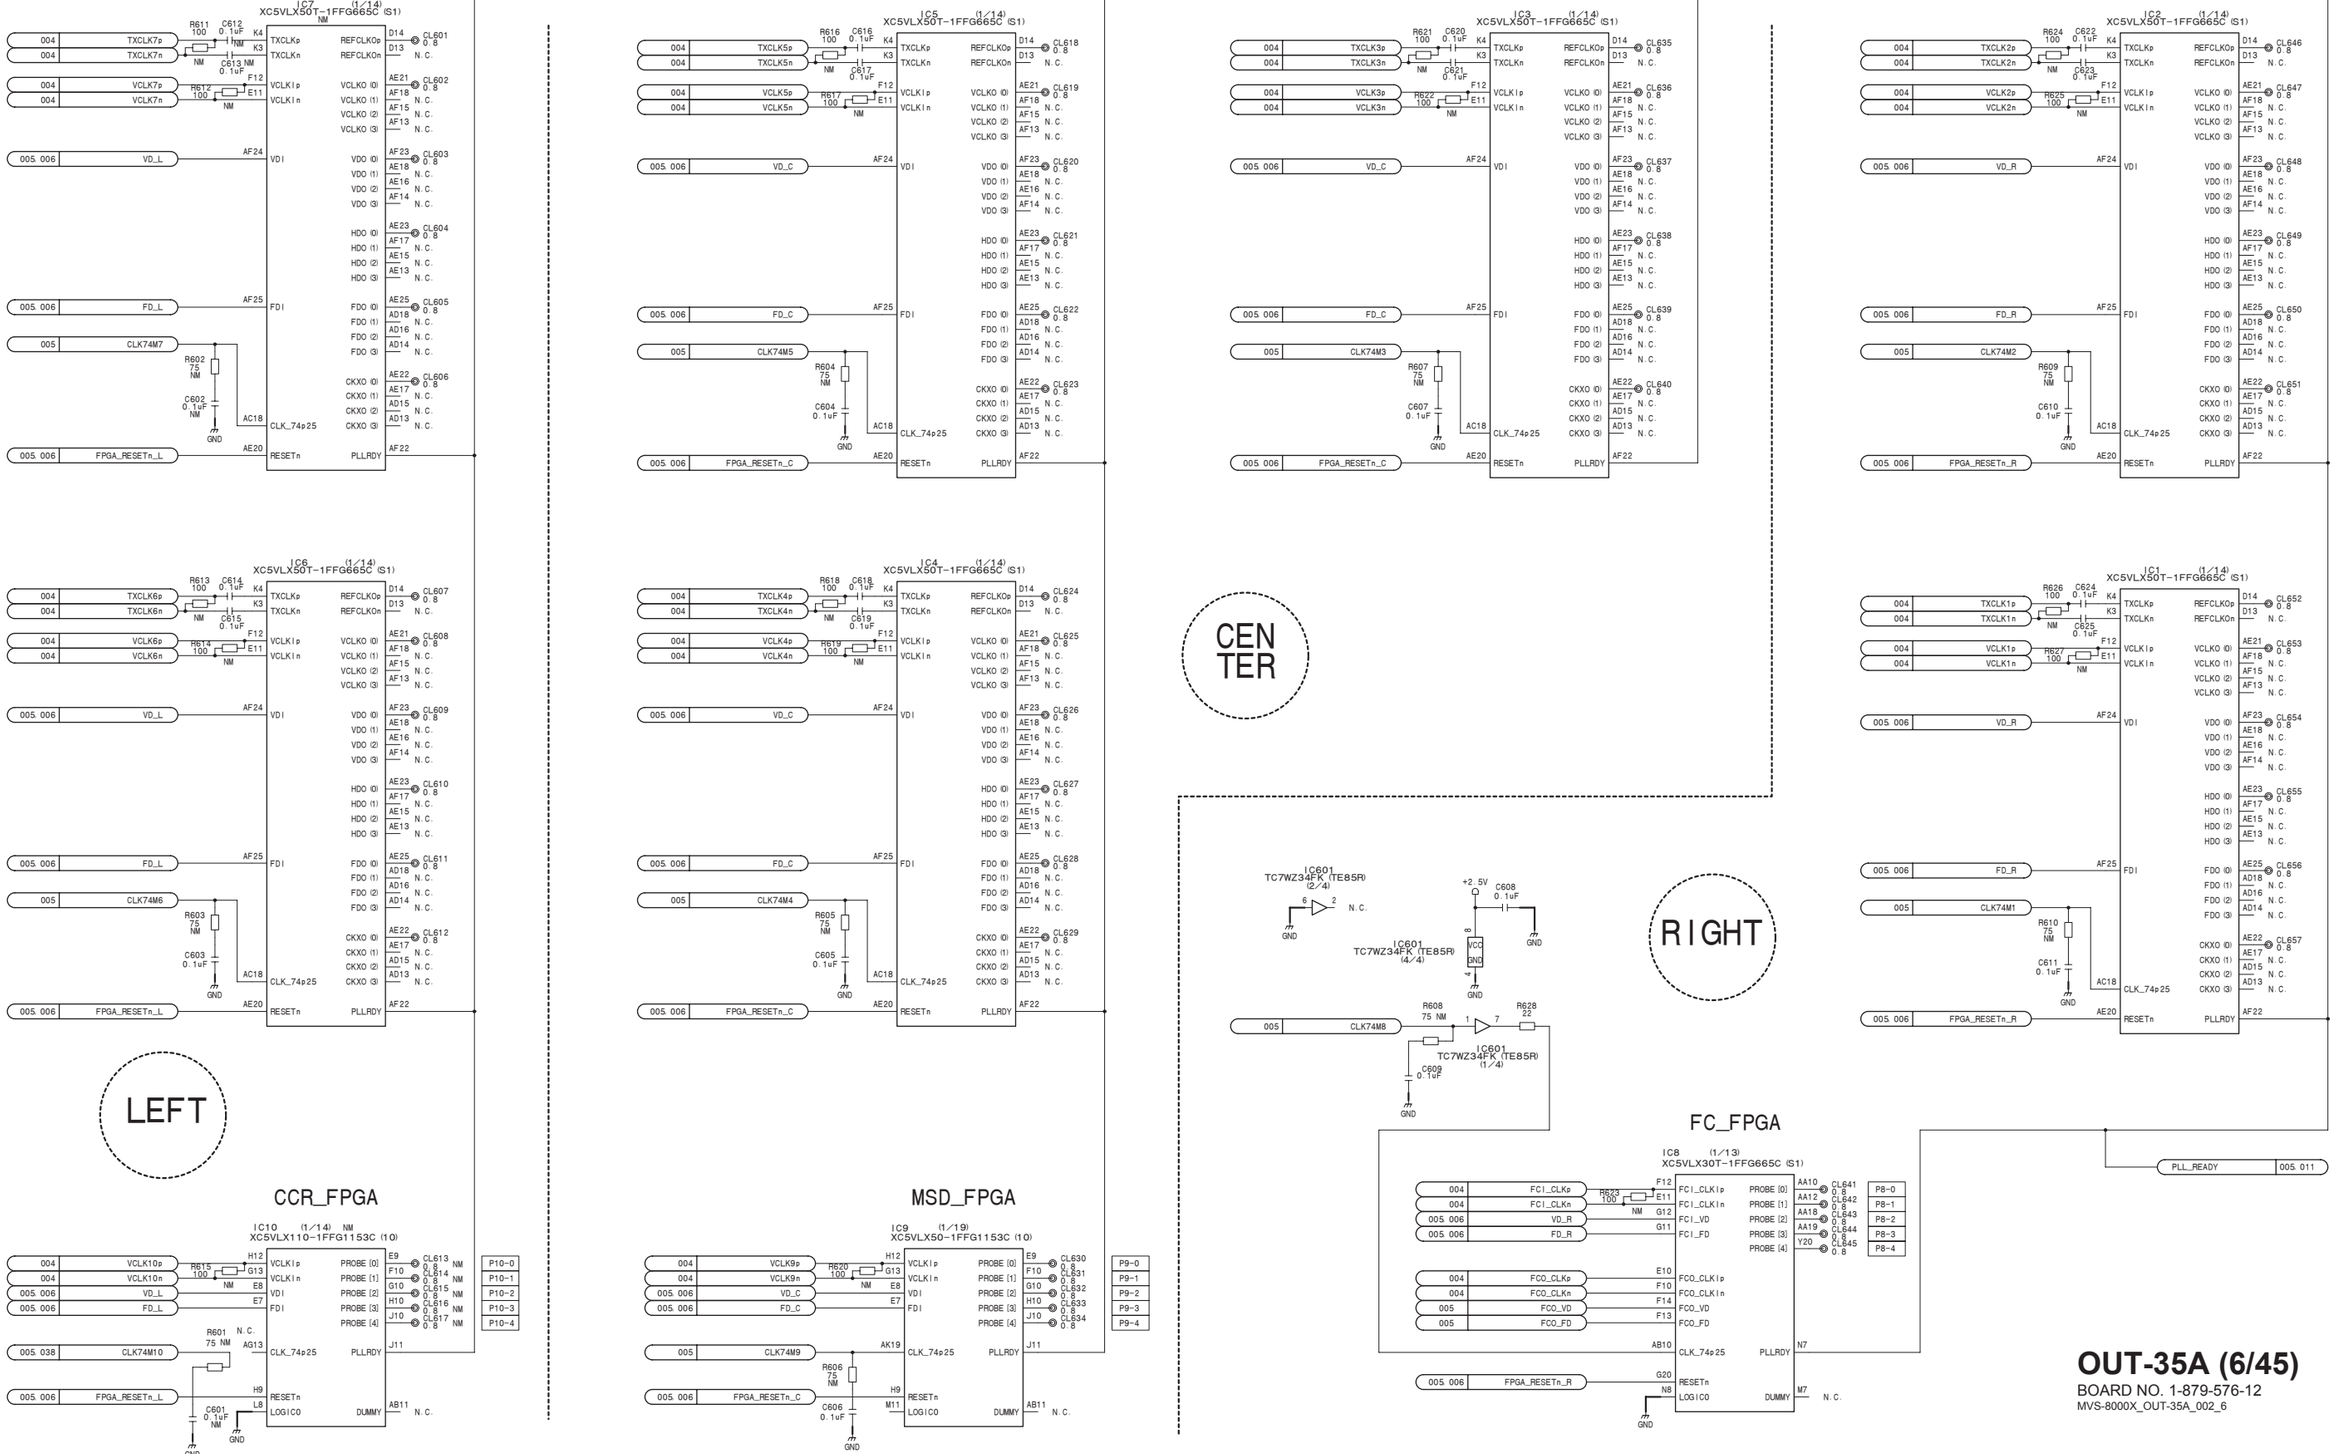

OUT-35A (7/45)
SUFFIX: -12

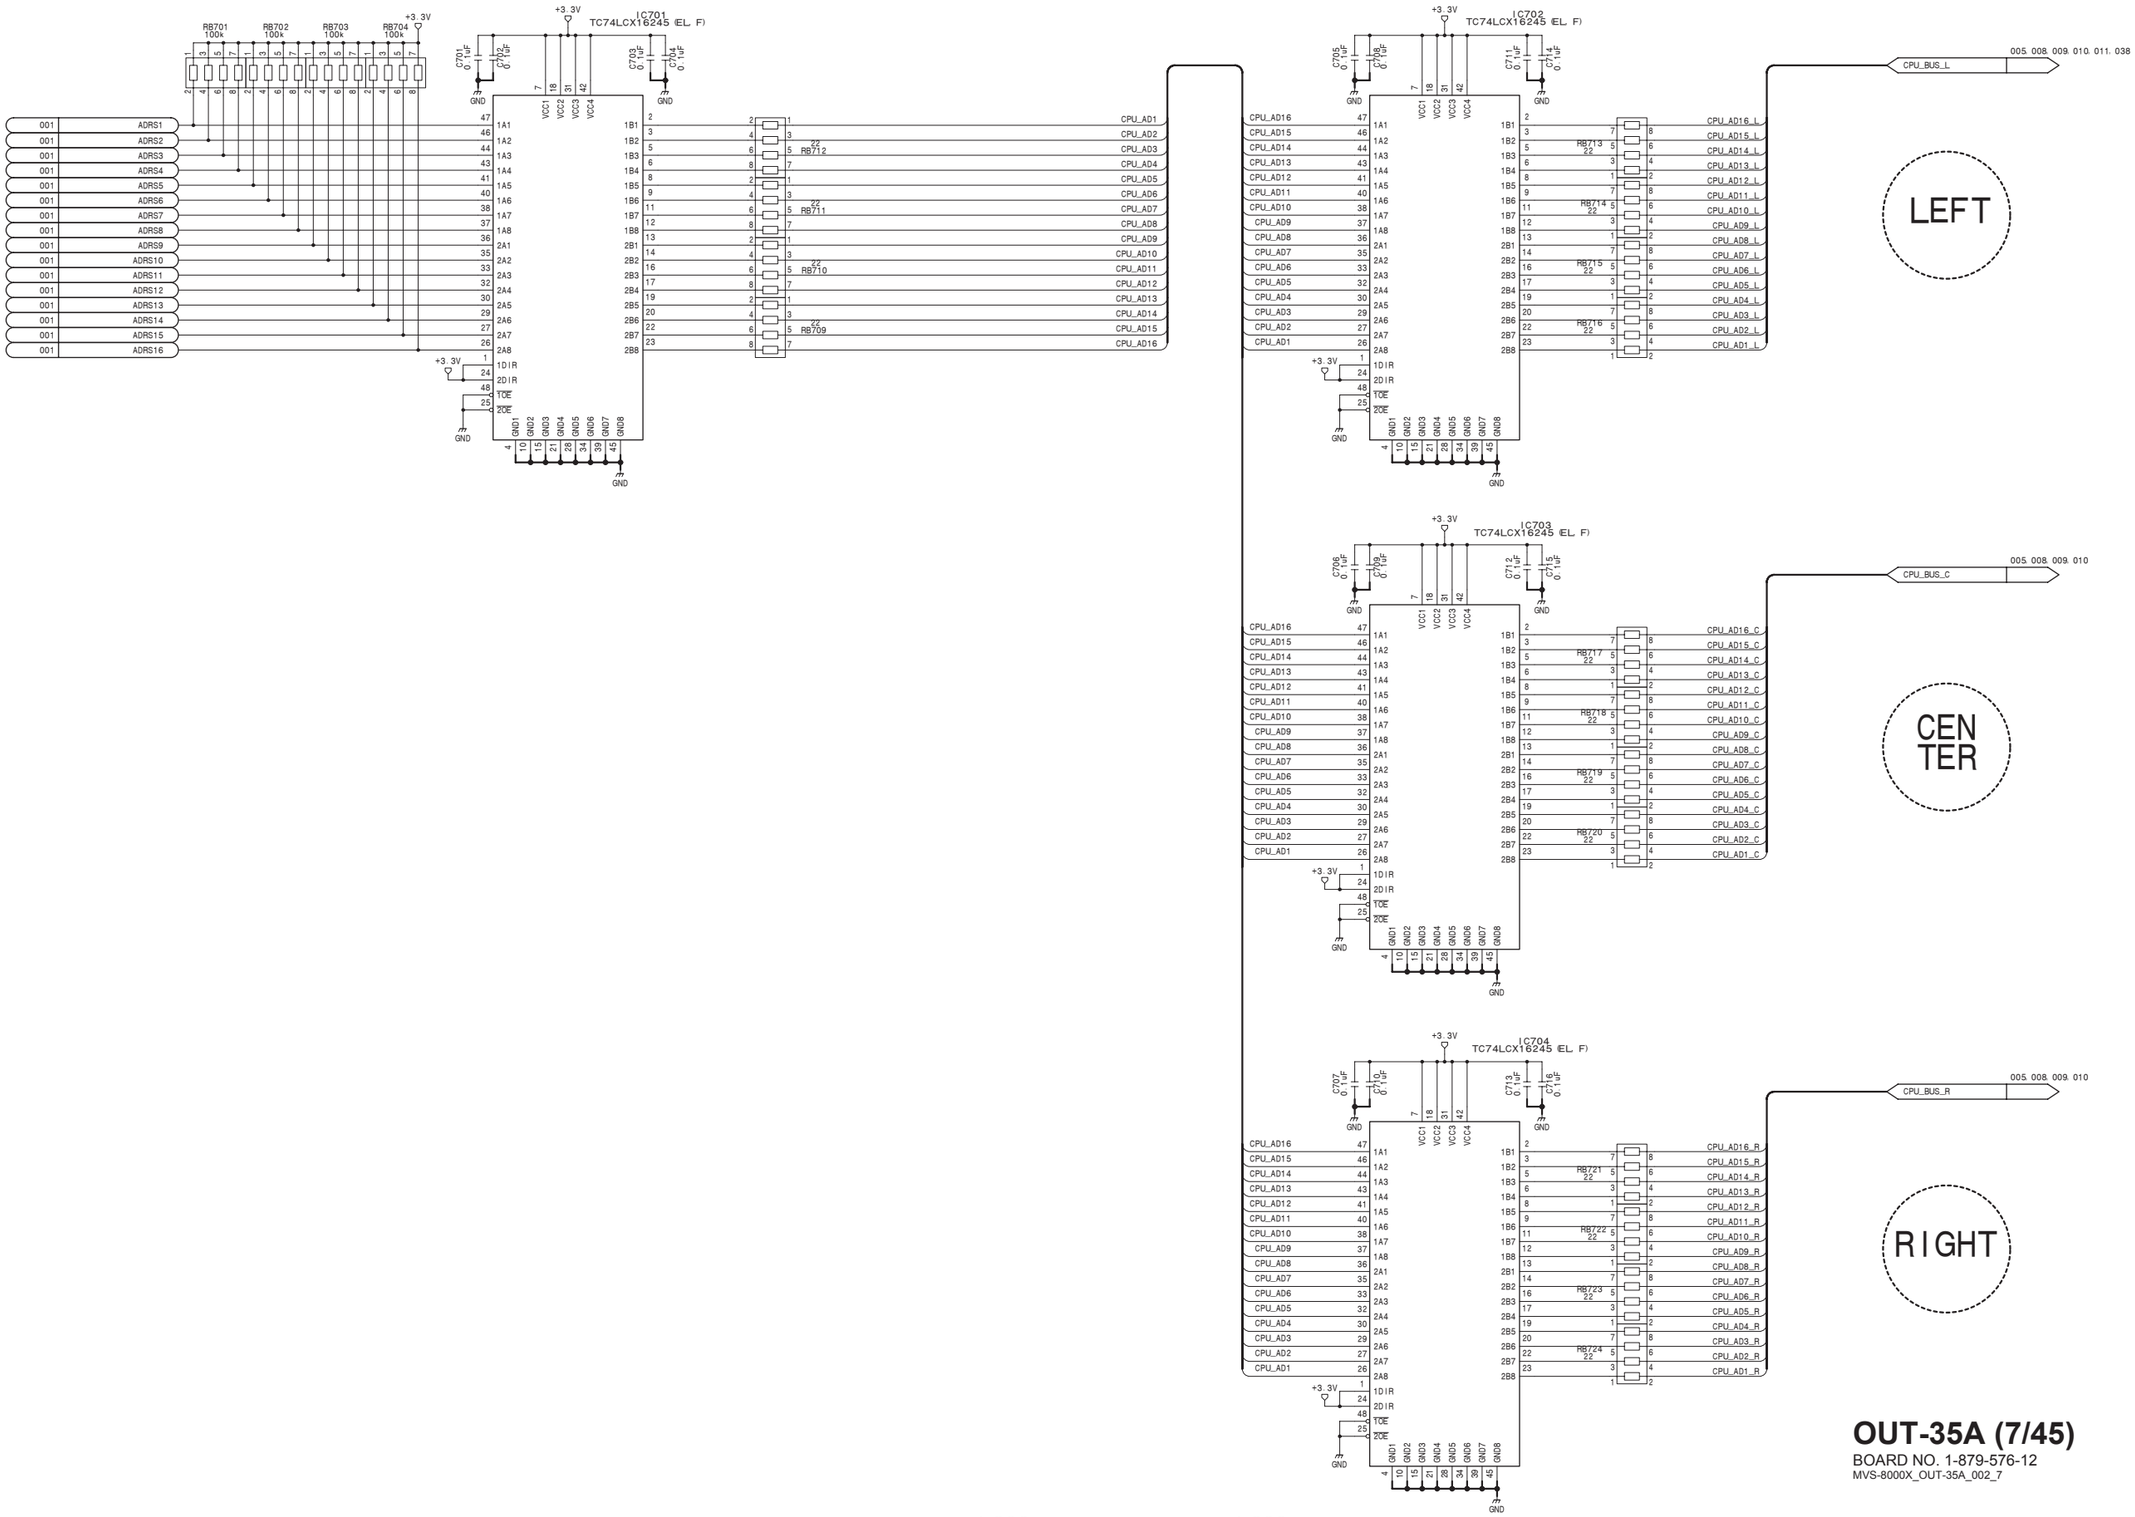

4-286

OUT-35A (7/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_7

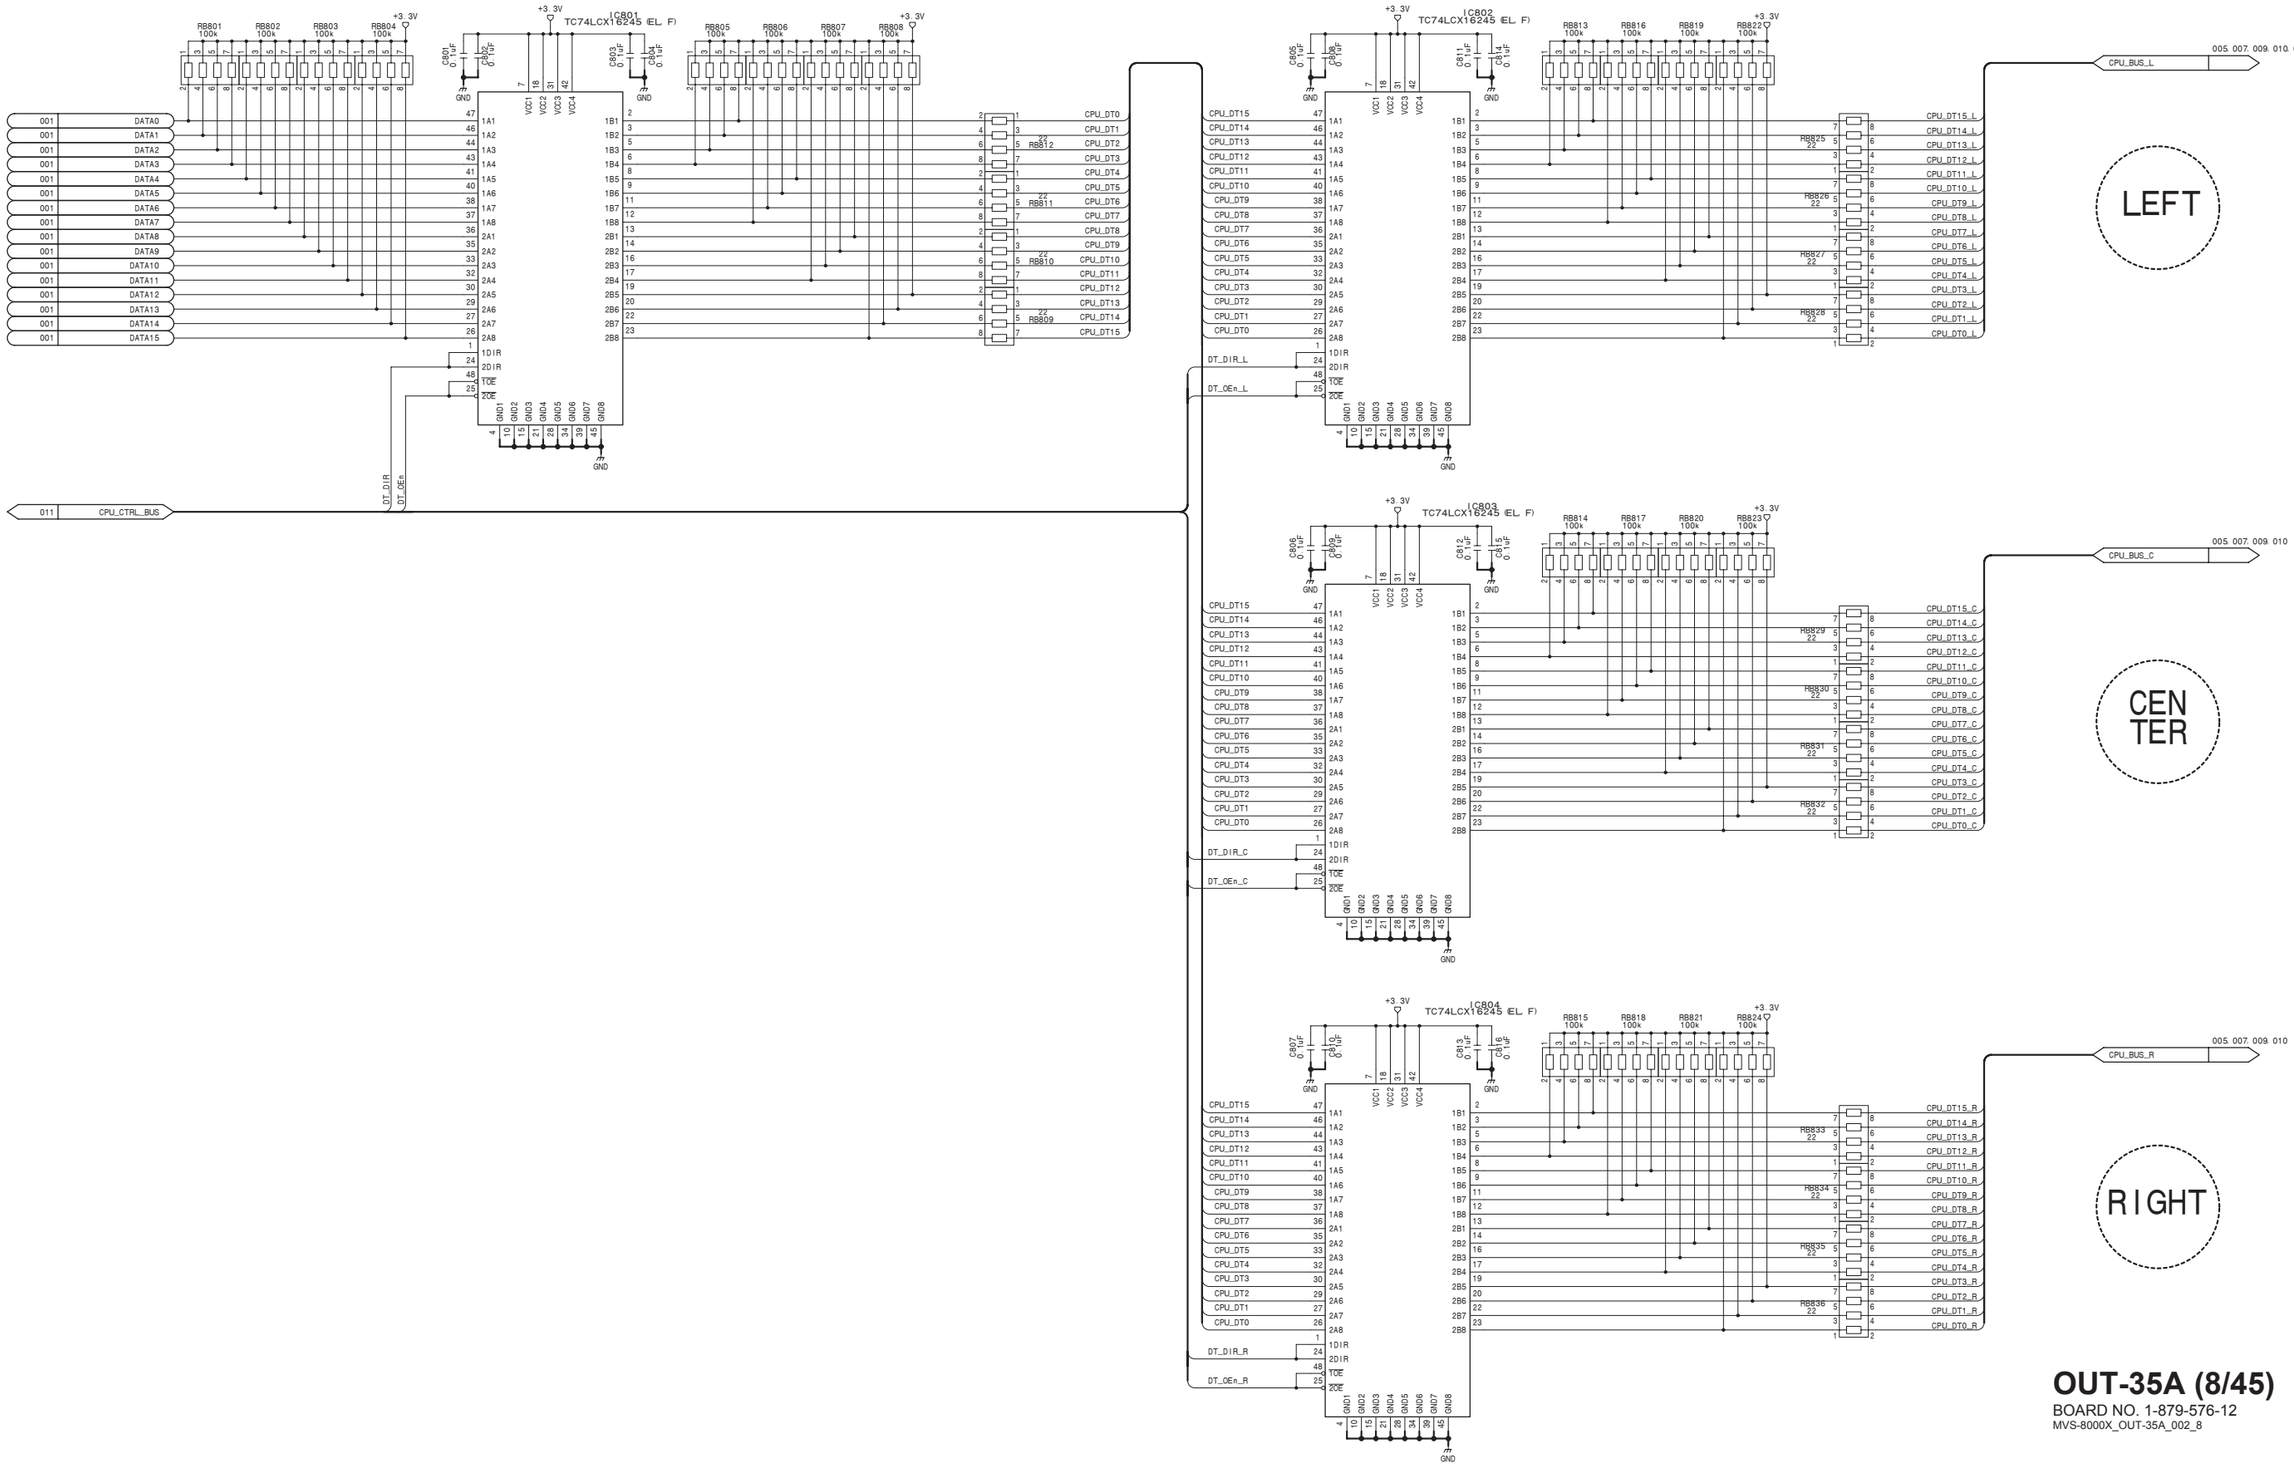

OUT-35A (8/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_8

OUT-35A (9/45) **SUFFIX: -12**

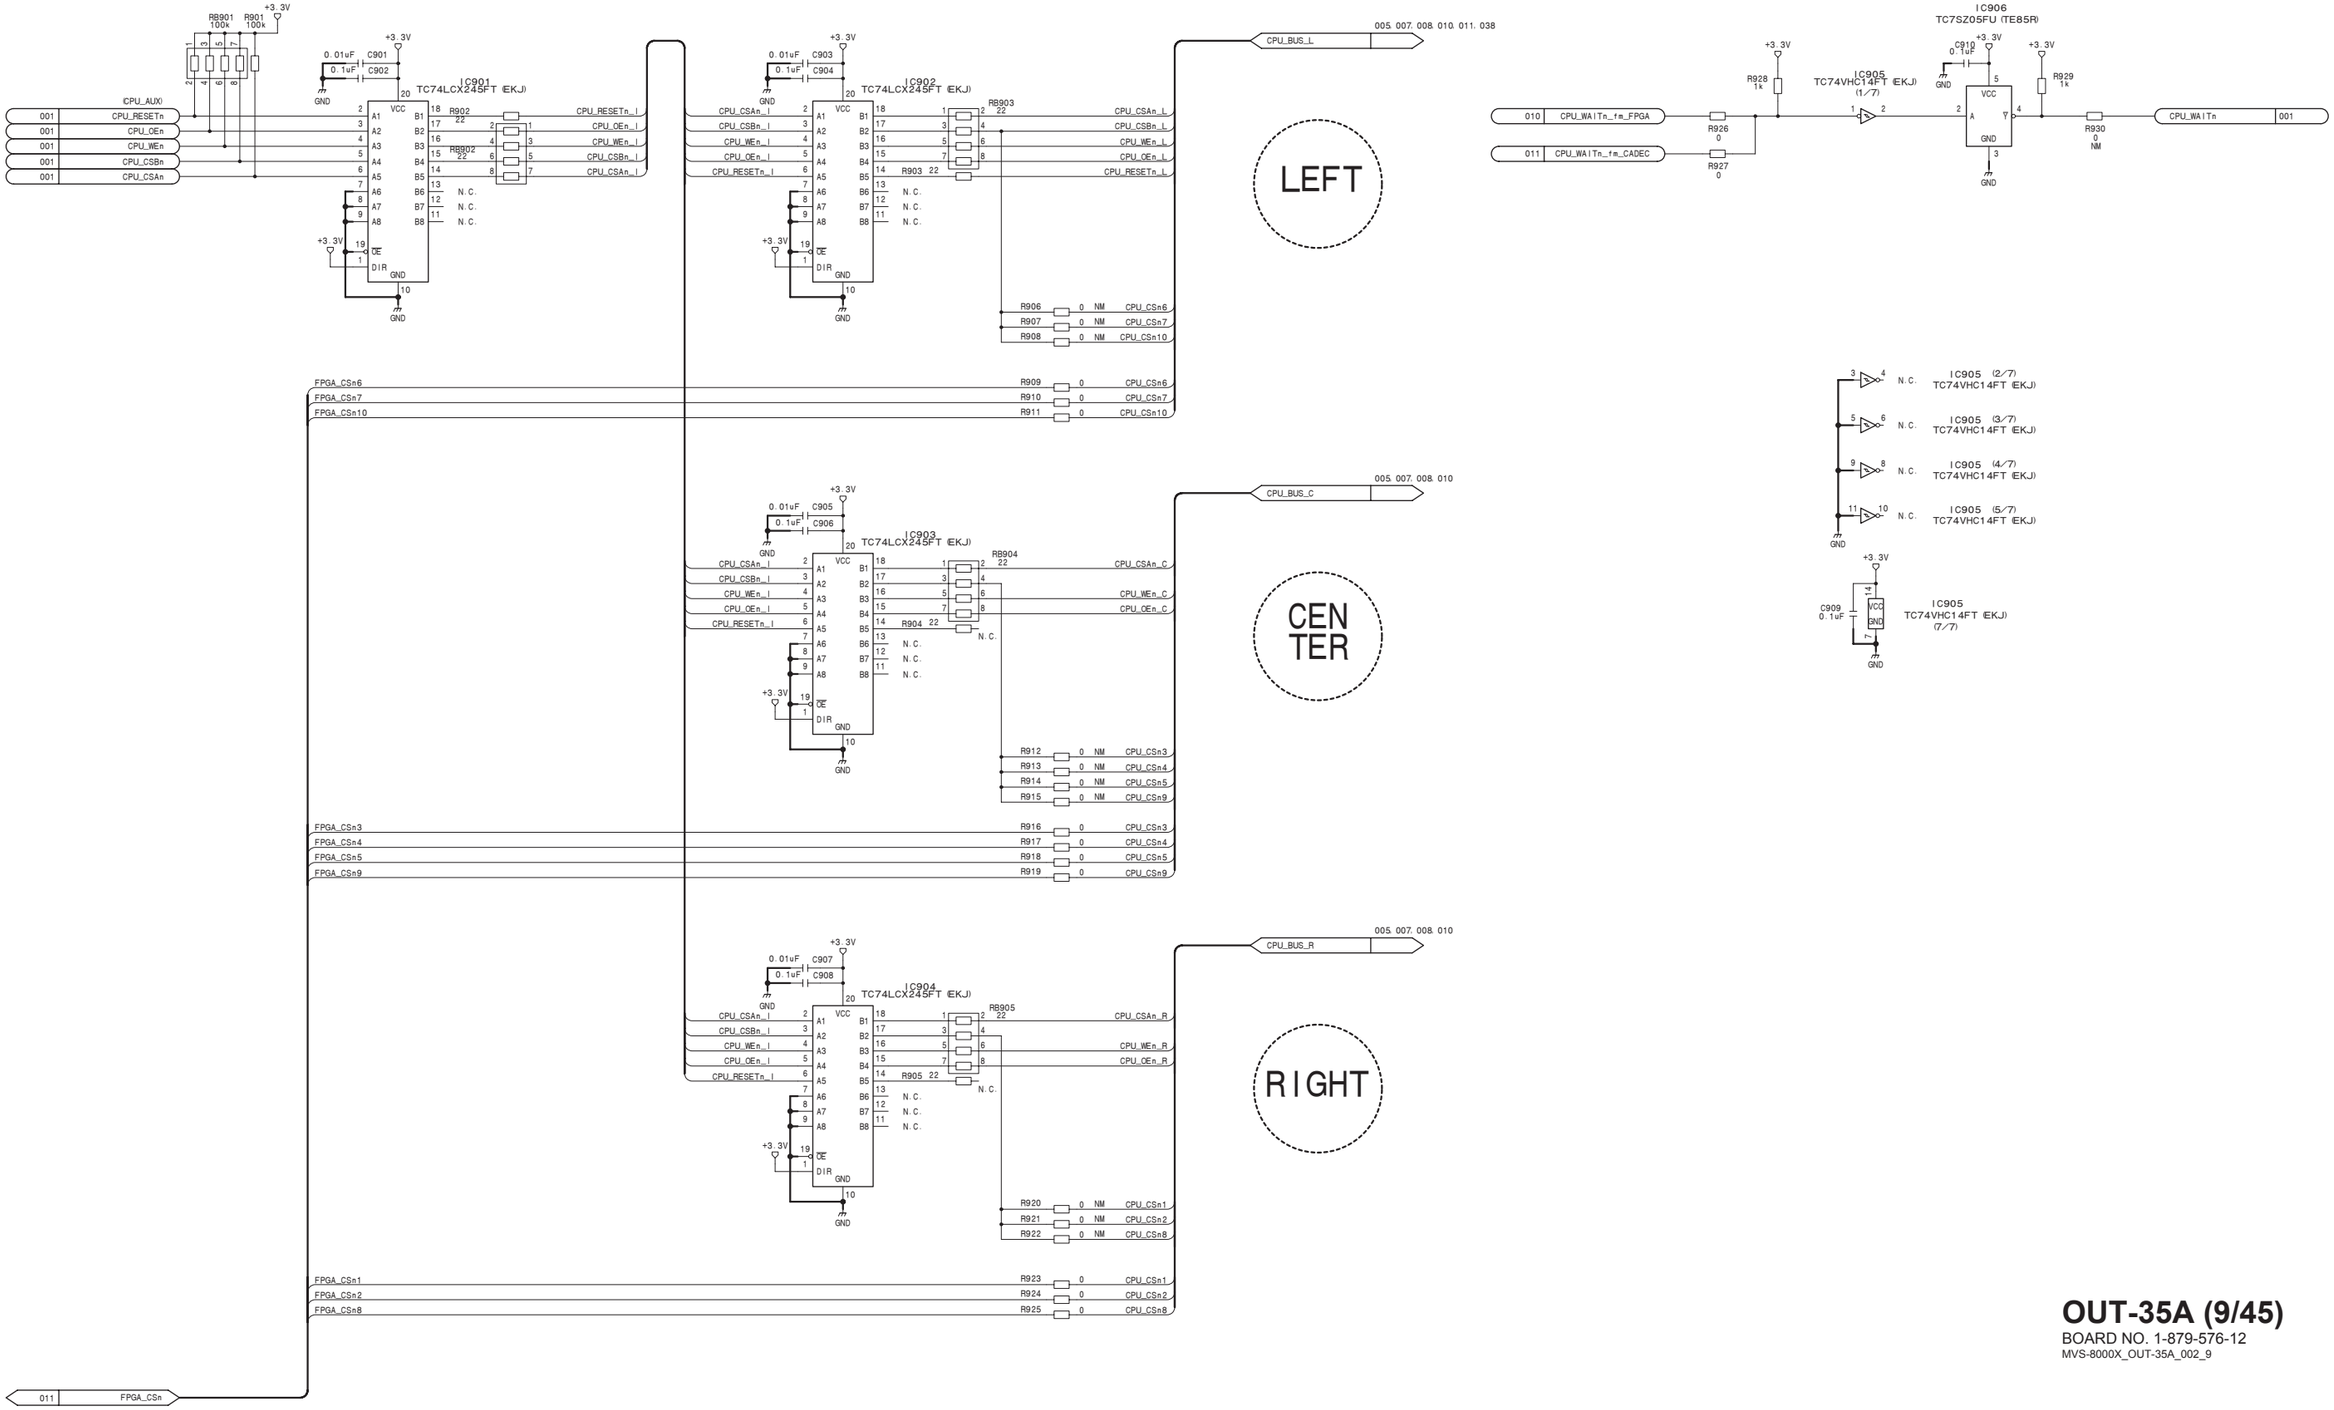

OUT-35A (9/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_9

OUT-35A (10/45)
SUFFIX: -12

005. 007. 008. 009. 011. 038

CPU_BUS_L

IC7 (5/14) NM
XC5VLX50T-1FFG665C (S1)

CPU_AD16_L	AB7	CPU_A<16>
CPU_AD15_L	AC7	CPU_A<15>
CPU_AD14_L	AE7	CPU_A<14>
CPU_AD13_L	AF7	CPU_A<13>
CPU_AD12_L	AB6	CPU_A<12>
CPU_AD11_L	AC6	CPU_A<11>
CPU_AD10_L	AD6	CPU_A<10>
CPU_AD9_L	AE6	CPU_A<9>
CPU_AD8_L	AA5	CPU_A<8>
CPU_AD7_L	W5	CPU_A<7>
CPU_AD6_L	Y6	CPU_A<6>
CPU_AD5_L	AE5	CPU_A<5>
CPU_AD4_L	AF5	CPU_A<4>
CPU_AD3_L	Y5	CPU_A<3>
CPU_AD2_L	AF4	CPU_A<2>
CPU_AD1_L	AF3	CPU_A<1>
		MFSDI
CPU_DT15_L	AD11	CPU_D<15>
CPU_DT14_L	AE11	CPU_D<14>
CPU_DT13_L	AD10	CPU_D<13>
CPU_DT12_L	AE10	CPU_D<12>
CPU_DT11_L	AF10	CPU_D<11>
CPU_DT10_L	AA9	CPU_D<10>
CPU_DT9_L	AB9	CPU_D<9>
CPU_DT8_L	AC9	CPU_D<8>
CPU_DT7_L	AD9	CPU_D<7>
CPU_DT6_L	AF9	CPU_D<6>
CPU_DT5_L	W8	CPU_D<5>
CPU_DT4_L	Y8	CPU_D<4>
CPU_DT3_L	AA8	CPU_D<3>
CPU_DT2_L	AC8	CPU_D<2>
CPU_DT1_L	AD8	CPU_D<1>
CPU_DT0_L	AE8	CPU_D<0>
CPU_CSn7	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_L	AA7	CPU_CSn<0>
CPU_WEn_L	AE12	CPU_WEn
CPU_OEn_L	AF12	CPU_REn
CPU_CLK7	AC11	CPU_CLK

NM NM C1001 0.1uF R1001 75 GND

IC6 (5/14)
XC5VLX50T-1FFG665C (S1)

CPU_AD16_L	AB7	CPU_A<16>
CPU_AD15_L	AC7	CPU_A<15>
CPU_AD14_L	AE7	CPU_A<14>
CPU_AD13_L	AF7	CPU_A<13>
CPU_AD12_L	AB6	CPU_A<12>
CPU_AD11_L	AC6	CPU_A<11>
CPU_AD10_L	AD6	CPU_A<10>
CPU_AD9_L	AE6	CPU_A<9>
CPU_AD8_L	AA5	CPU_A<8>
CPU_AD7_L	W5	CPU_A<7>
CPU_AD6_L	Y6	CPU_A<6>
CPU_AD5_L	AE5	CPU_A<5>
CPU_AD4_L	AF5	CPU_A<4>
CPU_AD3_L	Y5	CPU_A<3>
CPU_AD2_L	AF4	CPU_A<2>
CPU_AD1_L	AF3	CPU_A<1>
		MFSDI
CPU_DT15_L	AD11	CPU_D<15>
CPU_DT14_L	AE11	CPU_D<14>
CPU_DT13_L	AD10	CPU_D<13>
CPU_DT12_L	AE10	CPU_D<12>
CPU_DT11_L	AF10	CPU_D<11>
CPU_DT10_L	AA9	CPU_D<10>
CPU_DT9_L	AB9	CPU_D<9>
CPU_DT8_L	AC9	CPU_D<8>
CPU_DT7_L	AD9	CPU_D<7>
CPU_DT6_L	AF9	CPU_D<6>
CPU_DT5_L	W8	CPU_D<5>
CPU_DT4_L	Y8	CPU_D<4>
CPU_DT3_L	AA8	CPU_D<3>
CPU_DT2_L	AC8	CPU_D<2>
CPU_DT1_L	AD8	CPU_D<1>
CPU_DT0_L	AE8	CPU_D<0>
CPU_CSn6	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_L	AA7	CPU_CSn<0>
CPU_WEn_L	AE12	CPU_WEn
CPU_OEn_L	AF12	CPU_REn
CPU_CLK6	AC11	CPU_CLK

NM C1003 0.1uF R1003 75 GND

005. 007. 008. 009

CPU_BUS_C

IC5 (5/14)
XC5VLX50T-1FFG665C (S1)

CPU_AD16_C	AB7	CPU_A<16>
CPU_AD15_C	AC7	CPU_A<15>
CPU_AD14_C	AE7	CPU_A<14>
CPU_AD13_C	AF7	CPU_A<13>
CPU_AD12_C	AB6	CPU_A<12>
CPU_AD11_C	AC6	CPU_A<11>
CPU_AD10_C	AD6	CPU_A<10>
CPU_AD9_C	AE6	CPU_A<9>
CPU_AD8_C	AA5	CPU_A<8>
CPU_AD7_C	W5	CPU_A<7>
CPU_AD6_C	Y6	CPU_A<6>
CPU_AD5_C	AE5	CPU_A<5>
CPU_AD4_C	AF5	CPU_A<4>
CPU_AD3_C	Y5	CPU_A<3>
CPU_AD2_C	AF4	CPU_A<2>
CPU_AD1_C	AF3	CPU_A<1>
		MFSDI
CPU_DT15_C	AD11	CPU_D<15>
CPU_DT14_C	AE11	CPU_D<14>
CPU_DT13_C	AD10	CPU_D<13>
CPU_DT12_C	AE10	CPU_D<12>
CPU_DT11_C	AF10	CPU_D<11>
CPU_DT10_C	AA9	CPU_D<10>
CPU_DT9_C	AB9	CPU_D<9>
CPU_DT8_C	AC9	CPU_D<8>
CPU_DT7_C	AD9	CPU_D<7>
CPU_DT6_C	AF9	CPU_D<6>
CPU_DT5_C	W8	CPU_D<5>
CPU_DT4_C	Y8	CPU_D<4>
CPU_DT3_C	AA8	CPU_D<3>
CPU_DT2_C	AC8	CPU_D<2>
CPU_DT1_C	AD8	CPU_D<1>
CPU_DT0_C	AE8	CPU_D<0>
CPU_CSn5	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_C	AA7	CPU_CSn<0>
CPU_WEn_C	AE12	CPU_WEn
CPU_OEn_C	AF12	CPU_REn
CPU_CLK5	AC11	CPU_CLK

NM C1004 0.1uF R1004 75 GND

IC4 (5/14)
XC5VLX50T-1FFG665C (S1)

CPU_AD16_C	AB7	CPU_A<16>
CPU_AD15_C	AC7	CPU_A<15>
CPU_AD14_C	AE7	CPU_A<14>
CPU_AD13_C	AF7	CPU_A<13>
CPU_AD12_C	AB6	CPU_A<12>
CPU_AD11_C	AC6	CPU_A<11>
CPU_AD10_C	AD6	CPU_A<10>
CPU_AD9_C	AE6	CPU_A<9>
CPU_AD8_C	AA5	CPU_A<8>
CPU_AD7_C	W5	CPU_A<7>
CPU_AD6_C	Y6	CPU_A<6>
CPU_AD5_C	AE5	CPU_A<5>
CPU_AD4_C	AF5	CPU_A<4>
CPU_AD3_C	Y5	CPU_A<3>
CPU_AD2_C	AF4	CPU_A<2>
CPU_AD1_C	AF3	CPU_A<1>
		MFSDI
CPU_DT15_C	AD11	CPU_D<15>
CPU_DT14_C	AE11	CPU_D<14>
CPU_DT13_C	AD10	CPU_D<13>
CPU_DT12_C	AE10	CPU_D<12>
CPU_DT11_C	AF10	CPU_D<11>
CPU_DT10_C	AA9	CPU_D<10>
CPU_DT9_C	AB9	CPU_D<9>
CPU_DT8_C	AC9	CPU_D<8>
CPU_DT7_C	AD9	CPU_D<7>
CPU_DT6_C	AF9	CPU_D<6>
CPU_DT5_C	W8	CPU_D<5>
CPU_DT4_C	Y8	CPU_D<4>
CPU_DT3_C	AA8	CPU_D<3>
CPU_DT2_C	AC8	CPU_D<2>
CPU_DT1_C	AD8	CPU_D<1>
CPU_DT0_C	AE8	CPU_D<0>
CPU_CSn4	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_C	AA7	CPU_CSn<0>
CPU_WEn_C	AE12	CPU_WEn
CPU_OEn_C	AF12	CPU_REn
CPU_CLK4	AC11	CPU_CLK

NM C1005 0.1uF R1005 75 GND

IC3 (5/14)
XC5VLX50T-1FFG665C (S1)

CPU_AD16_C	AB7	CPU_A<16>
CPU_AD15_C	AC7	CPU_A<15>
CPU_AD14_C	AE7	CPU_A<14>
CPU_AD13_C	AF7	CPU_A<13>
CPU_AD12_C	AB6	CPU_A<12>
CPU_AD11_C	AC6	CPU_A<11>
CPU_AD10_C	AD6	CPU_A<10>
CPU_AD9_C	AE6	CPU_A<9>
CPU_AD8_C	AA5	CPU_A<8>
CPU_AD7_C	W5	CPU_A<7>
CPU_AD6_C	Y6	CPU_A<6>
CPU_AD5_C	AE5	CPU_A<5>
CPU_AD4_C	AF5	CPU_A<4>
CPU_AD3_C	Y5	CPU_A<3>
CPU_AD2_C	AF4	CPU_A<2>
CPU_AD1_C	AF3	CPU_A<1>
		MFSDI
CPU_DT15_C	AD11	CPU_D<15>
CPU_DT14_C	AE11	CPU_D<14>
CPU_DT13_C	AD10	CPU_D<13>
CPU_DT12_C	AE10	CPU_D<12>
CPU_DT11_C	AF10	CPU_D<11>
CPU_DT10_C	AA9	CPU_D<10>
CPU_DT9_C	AB9	CPU_D<9>
CPU_DT8_C	AC9	CPU_D<8>
CPU_DT7_C	AD9	CPU_D<7>
CPU_DT6_C	AF9	CPU_D<6>
CPU_DT5_C	W8	CPU_D<5>
CPU_DT4_C	Y8	CPU_D<4>
CPU_DT3_C	AA8	CPU_D<3>
CPU_DT2_C	AC8	CPU_D<2>
CPU_DT1_C	AD8	CPU_D<1>
CPU_DT0_C	AE8	CPU_D<0>
CPU_CSn3	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_C	AA7	CPU_CSn<0>
CPU_WEn_C	AE12	CPU_WEn
CPU_OEn_C	AF12	CPU_REn
CPU_CLK3	AC11	CPU_CLK

NM C1007 0.1uF R1007 75 GND

005. 007. 008. 009

CPU_BUS_R

IC2 (5/14)
XC5VLX50T-1FFG665C (S1)

CPU_AD16_R	AB7	CPU_A<16>
CPU_AD15_R	AC7	CPU_A<15>
CPU_AD14_R	AE7	CPU_A<14>
CPU_AD13_R	AF7	CPU_A<13>
CPU_AD12_R	AB6	CPU_A<12>
CPU_AD11_R	AC6	CPU_A<11>
CPU_AD10_R	AD6	CPU_A<10>
CPU_AD9_R	AE6	CPU_A<9>
CPU_AD8_R	AA5	CPU_A<8>
CPU_AD7_R	W5	CPU_A<7>
CPU_AD6_R	Y6	CPU_A<6>
CPU_AD5_R	AE5	CPU_A<5>
CPU_AD4_R	AF5	CPU_A<4>
CPU_AD3_R	Y5	CPU_A<3>
CPU_AD2_R	AF4	CPU_A<2>
CPU_AD1_R	AF3	CPU_A<1>
		MFSDI
CPU_DT15_R	AD11	CPU_D<15>
CPU_DT14_R	AE11	CPU_D<14>
CPU_DT13_R	AD10	CPU_D<13>
CPU_DT12_R	AE10	CPU_D<12>
CPU_DT11_R	AF10	CPU_D<11>
CPU_DT10_R	AA9	CPU_D<10>
CPU_DT9_R	AB9	CPU_D<9>
CPU_DT8_R	AC9	CPU_D<8>
CPU_DT7_R	AD9	CPU_D<7>
CPU_DT6_R	AF9	CPU_D<6>
CPU_DT5_R	W8	CPU_D<5>
CPU_DT4_R	Y8	CPU_D<4>
CPU_DT3_R	AA8	CPU_D<3>
CPU_DT2_R	AC8	CPU_D<2>
CPU_DT1_R	AD8	CPU_D<1>
CPU_DT0_R	AE8	CPU_D<0>
CPU_CSn2	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_R	AA7	CPU_CSn<0>
CPU_WEn_R	AE12	CPU_WEn
CPU_OEn_R	AF12	CPU_REn
CPU_CLK2	AC11	CPU_CLK

NM C1010 0.1uF R1009 75 GND

IC1 (5/14)
XC5VLX50T-1FFG665C (S1)

CPU_AD16_R	AB7	CPU_A<16>
CPU_AD15_R	AC7	CPU_A<15>
CPU_AD14_R	AE7	CPU_A<14>
CPU_AD13_R	AF7	CPU_A<13>
CPU_AD12_R	AB6	CPU_A<12>
CPU_AD11_R	AC6	CPU_A<11>
CPU_AD10_R	AD6	CPU_A<10>
CPU_AD9_R	AE6	CPU_A<9>
CPU_AD8_R	AA5	CPU_A<8>
CPU_AD7_R	W5	CPU_A<7>
CPU_AD6_R	Y6	CPU_A<6>
CPU_AD5_R	AE5	CPU_A<5>
CPU_AD4_R	AF5	CPU_A<4>
CPU_AD3_R	Y5	CPU_A<3>
CPU_AD2_R	AF4	CPU_A<2>
CPU_AD1_R	AF3	CPU_A<1>
		MFSDI
CPU_DT15_R	AD11	CPU_D<15>
CPU_DT14_R	AE11	CPU_D<14>
CPU_DT13_R	AD10	CPU_D<13>
CPU_DT12_R	AE10	CPU_D<12>
CPU_DT11_R	AF10	CPU_D<11>
CPU_DT10_R	AA9	CPU_D<10>
CPU_DT9_R	AB9	CPU_D<9>
CPU_DT8_R	AC9	CPU_D<8>
CPU_DT7_R	AD9	CPU_D<7>
CPU_DT6_R	AF9	CPU_D<6>
CPU_DT5_R	W8	CPU_D<5>
CPU_DT4_R	Y8	CPU_D<4>
CPU_DT3_R	AA8	CPU_D<3>
CPU_DT2_R	AC8	CPU_D<2>
CPU_DT1_R	AD8	CPU_D<1>
CPU_DT0_R	AE8	CPU_D<0>
CPU_CSn1	Y7	CPU_CSn<1> CPU_WAITn W9
CPU_CSAn_R	AA7	CPU_CSn<0>
CPU_WEn_R	AE12	CPU_WEn
CPU_OEn_R	AF12	CPU_REn
CPU_CLK1	AC11	CPU_CLK

NM C1011 0.1uF R1010 75 GND

CPU_WAITn_fm_FPGA 009

CCR_FPGA

IC10 (8/14) NM
XC5VLX110-1FFG1153C (10)

CPU_AD16_L	AH10	CPU_A [16]
CPU_AD15_L	AG10	CPU_A [15]
CPU_AD14_L	AG11	CPU_A [14]
CPU_AD13_L	AF10	CPU_A [13]
CPU_AD12_L	AJ9	CPU_A [12]
CPU_AD11_L	AH9	CPU_A [11]
CPU_AD10_L	AK9	CPU_A [10]
CPU_AD9_L	AJ10	CPU_A [9]
CPU_AD8_L	AK7	CPU_A [8]
CPU_AD7_L	AH8	CPU_A [7]
CPU_AD6_L	AG7	CPU_A [6]
CPU_AD5_L	AK8	CPU_A [5]
CPU_AD4_L	AJ6	CPU_A [4]
CPU_AD3_L	AK6	CPU_A [3]
CPU_AD2_L	AJ7	CPU_A [2]
CPU_AD1_L	AH7	CPU_A [1]
CPU_DT15_L	AA10	CPU_D [15]
CPU_DT14_L	AB10	CPU_D [14]
CPU_DT13_L	AD10	CPU_D [13]
CPU_DT12_L	AC10	CPU_D [12]
CPU_DT11_L	AD9	CPU_D [11]
CPU_DT10_L	AE9	CPU_D [10]
CPU_DT9_L	AC9	CPU_D [9]
CPU_DT8_L	AA9	CPU_D [8]
CPU_DT7_L	AE8	CPU_D [7]
CPU_DT6_L	AD7	CPU_D [6]
CPU_DT5_L	AE7	CPU_D [5]
CPU_DT4_L	AC8	CPU_D [4]
CPU_DT3_L	AC7	CPU_D [3]
CPU_DT2_L	AB8	CPU_D [2]
CPU_DT1_L	AB7	CPU_D [1]
CPU_DT0_L	AA8	CPU_D [0]
CPU_CSAn_L	AF8	CPU_CSn [0] CPU_WAITn AE11
CPU_CSn10	AF9	CPU_CSn [1]
CPU_WEn_L	AD11	CPU_WEn
CPU_OEn_L	AF11	CPU_REn
CPU_CLK10	AH12	CPU_CLK
	N.C.	

NM NM C1002 0.1uF R1002 75 GND

MSD_FPGA

IC9 (11/19)
XC5VLX50-1FFG1153C (10)

CPU_AD16_C	AG11	CPU_A [16]
CPU_AD15_C	AF10	CPU_A [15]
CPU_AD14_C	AG10	CPU_A [14]
CPU_AD13_C	AH10	CPU_A [13]
CPU_AD12_C	AJ10	CPU_A [12]
CPU_AD11_C	AH9	CPU_A [11]
CPU_AD10_C	AJ9	CPU_A [10]
CPU_AD9_C	AK9	CPU_A [9]
CPU_AD8_C	AH8	CPU_A [8]
CPU_AD7_C	AK8	CPU_A [7]
CPU_AD6_C	AG7	CPU_A [6]
CPU_AD5_C	AH7	CPU_A [5]
CPU_AD4_C	AJ7	CPU_A [4]
CPU_AD3_C	AK7	CPU_A [3]
CPU_AD2_C	AJ6	CPU_A [2]
CPU_AD1_C	AK6	CPU_A [1]
CPU_DT15_C	AB7	CPU_D [15]
CPU_DT14_C	AA8	CPU_D [14]
CPU_DT13_C	AA10	CPU_D [13]
CPU_DT12_C	AA9	CPU_D [12]
CPU_DT11_C	AB10	CPU_D [11]
CPU_DT10_C	AB8	CPU_D [10]
CPU_DT9_C	AC10	CPU_D [9]
CPU_DT8_C	AC9	CPU_D [8]
CPU_DT7_C	AD10	CPU_D [7]
CPU_DT6_C	AD9	CPU_D [6]
CPU_DT5_C	AE9	CPU_D [5]
CPU_DT4_C	AC8	CPU_D [4]
CPU_DT3_C	AE8	CPU_D [3]
CPU_DT2_C	AC7	CPU_D [2]
CPU_DT1_C	AD7	CPU_D [1]
CPU_DT0_C	AE7	CPU_D [0]
CPU_CSAn_C	AF8	CPU_CSn [0] CPU_WAITn AE11
CPU_CSn9	AF9	CPU_CSn [1]
CPU_WEn_C	AD11	CPU_WEn
CPU_OEn_C	AF11	CPU_REn
CPU_CLK9	AH12	CPU_CLK

NM C1006 0.1uF R1006 75 GND

FC_FPGA

IC8 (7/13)
XC5VLX30T-1FFG665C (S1)

CPU_AD16_R	J21	CPU_A [16]
CPU_AD15_R	J23	CPU_A [15]
CPU_AD14_R	J24	CPU_A [14]
CPU_AD13_R	K21	CPU_A [13]
CPU_AD12_R	K22	CPU_A [12]
CPU_AD11_R	L23	CPU_A [11]
CPU_AD10_R	K25	CPU_A [10]
CPU_AD9_R	K26	CPU_A [9]
CPU_AD8_R	L24	CPU_A [8]
CPU_AD7_R	L25	CPU_A [7]
CPU_AD6_R	L22	CPU_A [6]
CPU_AD5_R	M21	CPU_A [5]
CPU_AD4_R	M26	CPU_A [4]
CPU_AD3_R	M25	CPU_A [3]
CPU_AD2_R	M24	CPU_A [2]
CPU_AD1_R	M22	CPU_A [1]
CPU_DT15_R	E22	CPU_D [15]
CPU_DT14_R	F22	CPU_D [14]
CPU_DT13_R	G22	CPU_D [13]
CPU_DT12_R	E23	CPU_D [12]
CPU_DT11_R	F23	CPU_D [11]
CPU_DT10_R	F24	CPU_D [10]
CPU_DT9_R	H22	CPU_D [9]
CPU_DT8_R	F25	CPU_D [8]
CPU_DT7_R	E26	CPU_D [7]
CPU_DT6_R	E25	CPU_D [6]
CPU_DT5_R	G24	CPU_D [5]
CPU_DT4_R	G25	CPU_D [4]
CPU_DT3_R	G26	CPU_D [3]
CPU_DT2_R	H23	CPU_D [2]
CPU_DT1_R	H24	CPU_D [1]
CPU_DT0_R	H26	CPU_D [0]
CPU_CSAn_R	N23	CPU_CSn [0] CPU_WAITn N24
CPU_CSn8	N26	CPU_CSn [1]
CPU_WEn_R	J26	CPU_WEn
CPU_OEn_R	J25	CPU_REn
	G21	CPU_CLK

CPU_CLK8

+2.5V C1008 0.1uF GND

3 5 R1011 22

NM C1009 0.1uF R1008 75 GND

IC601
TC7WZ34FK (TE85R)
(3/4)

LEFT

CEN TER

RIGHT

OUT-35A (10/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_10

4-289

OUT-35A (11/45)
SUFFIX: -12

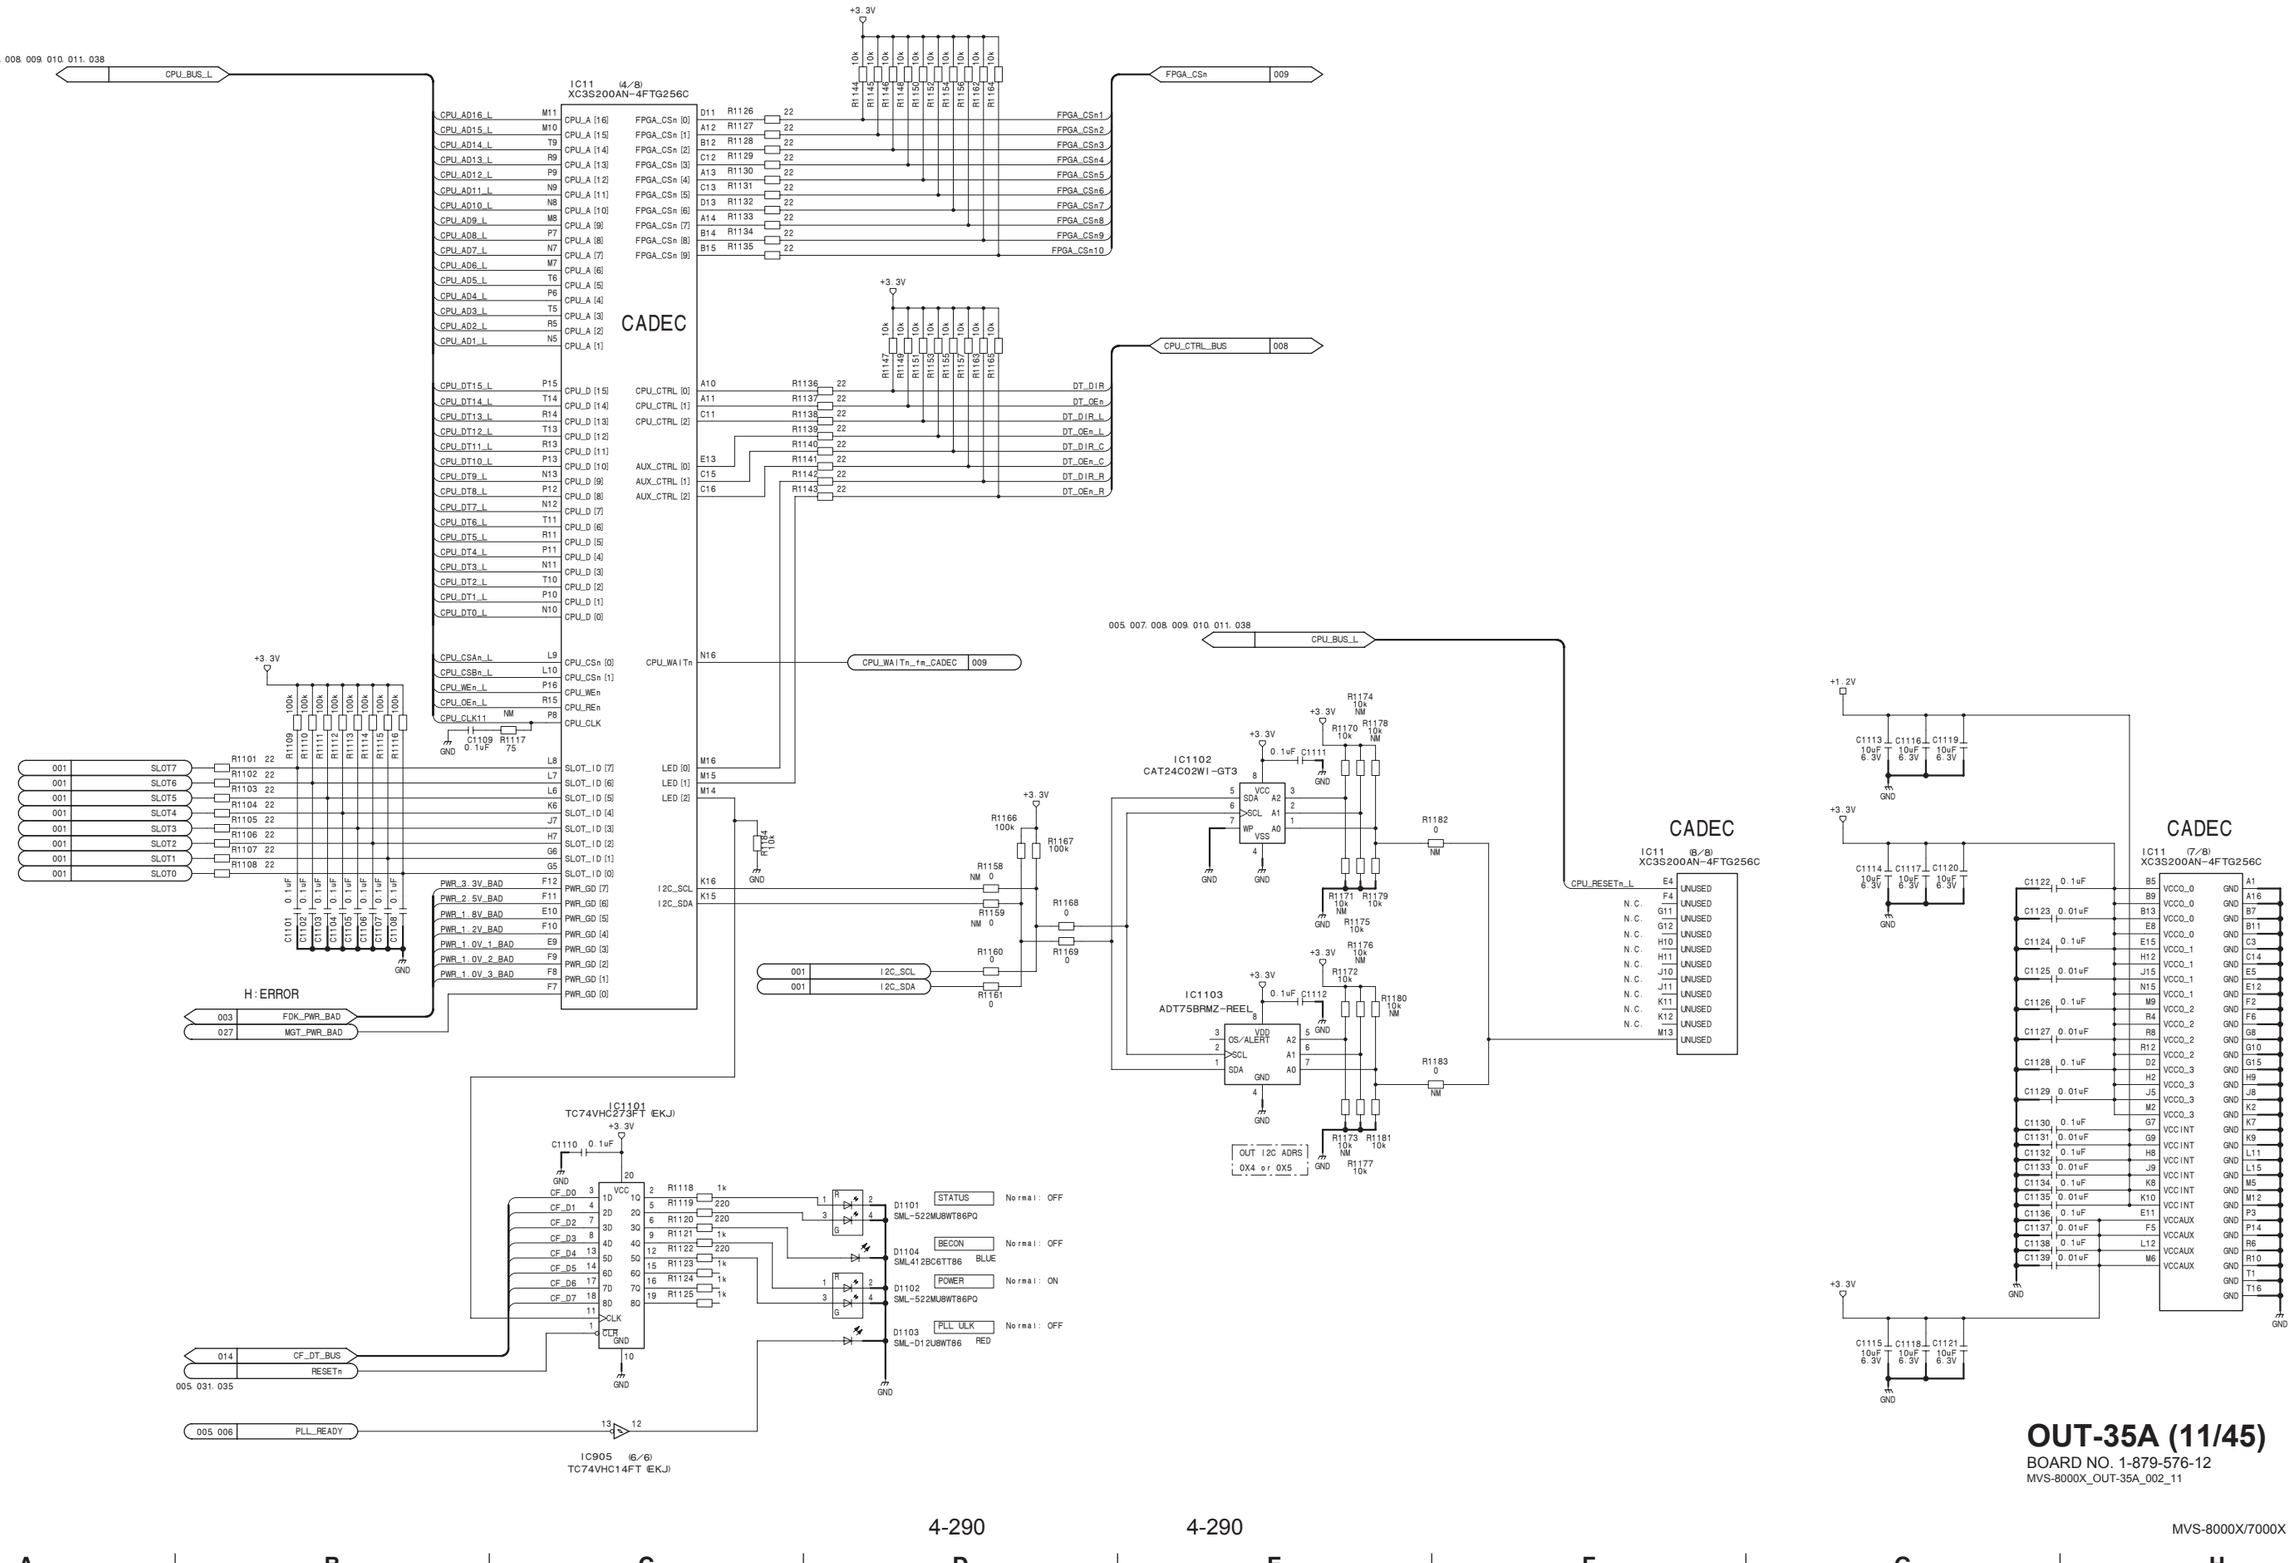

OUT-35A (11/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_11

4-290
MVS-8000X/7000X

OUT-35A (12/45)
SUFFIX: -12

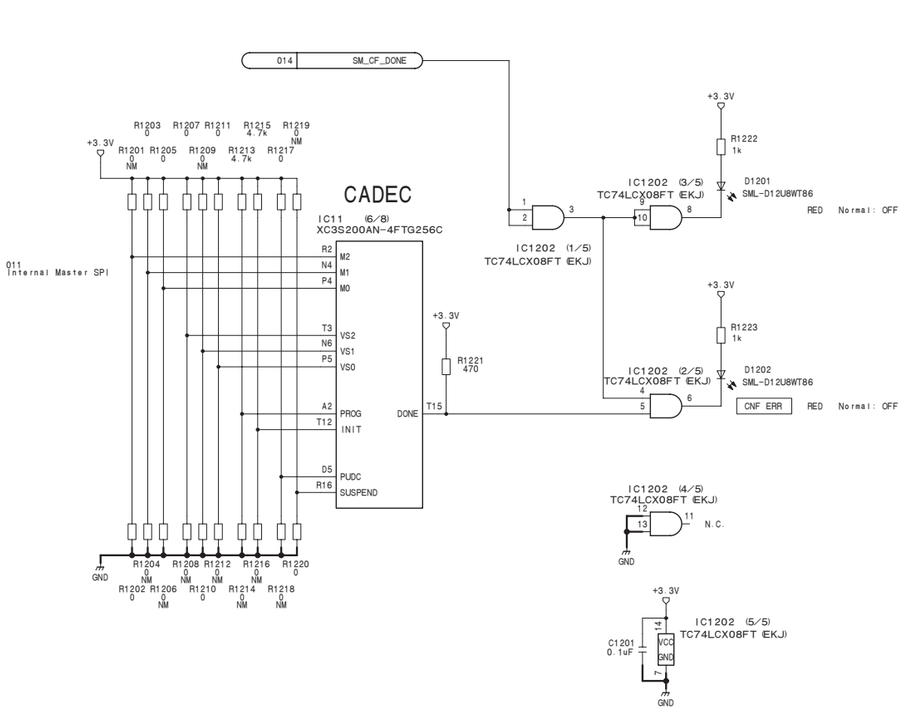

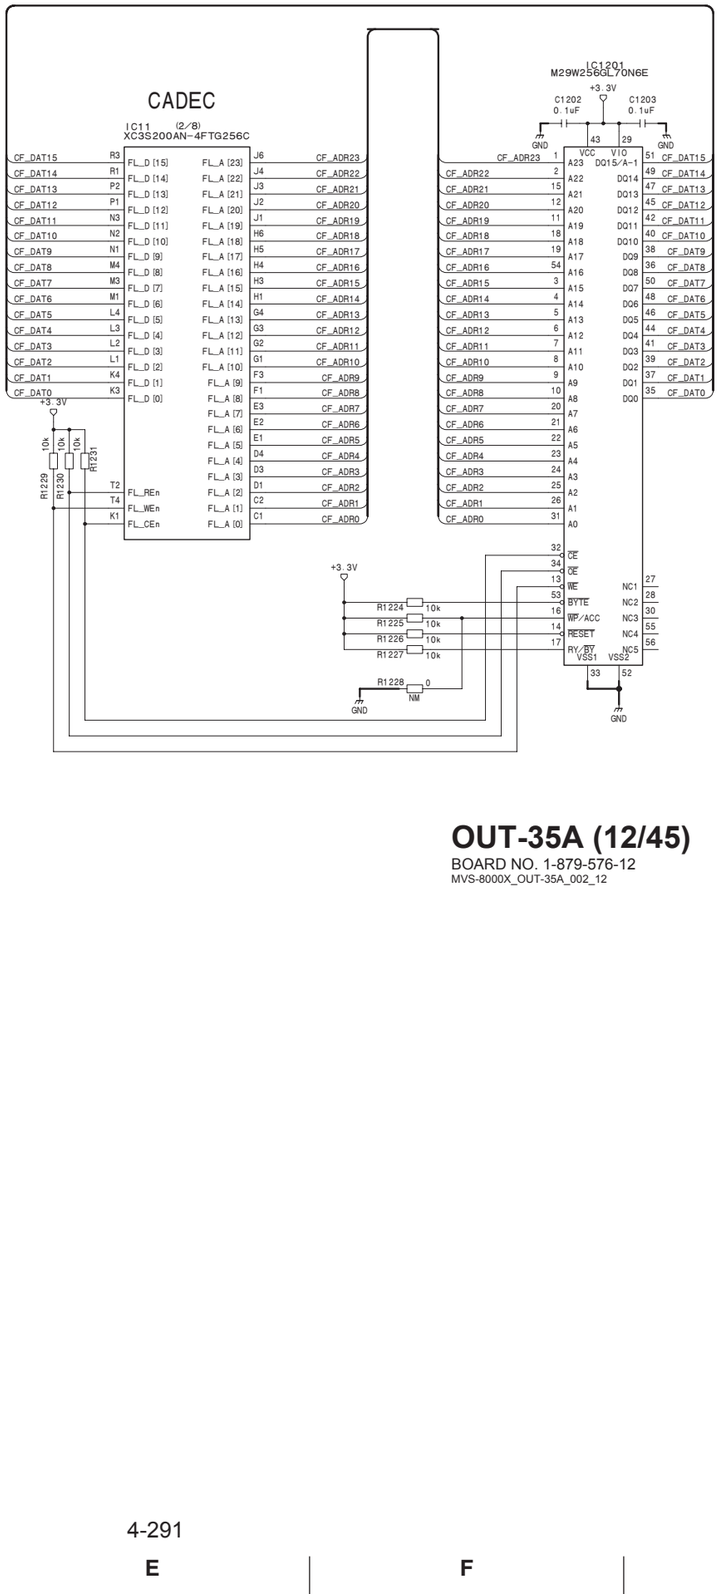

OUT-35A (12/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_12

OUT-35A (13/45)
SUFFIX: -12

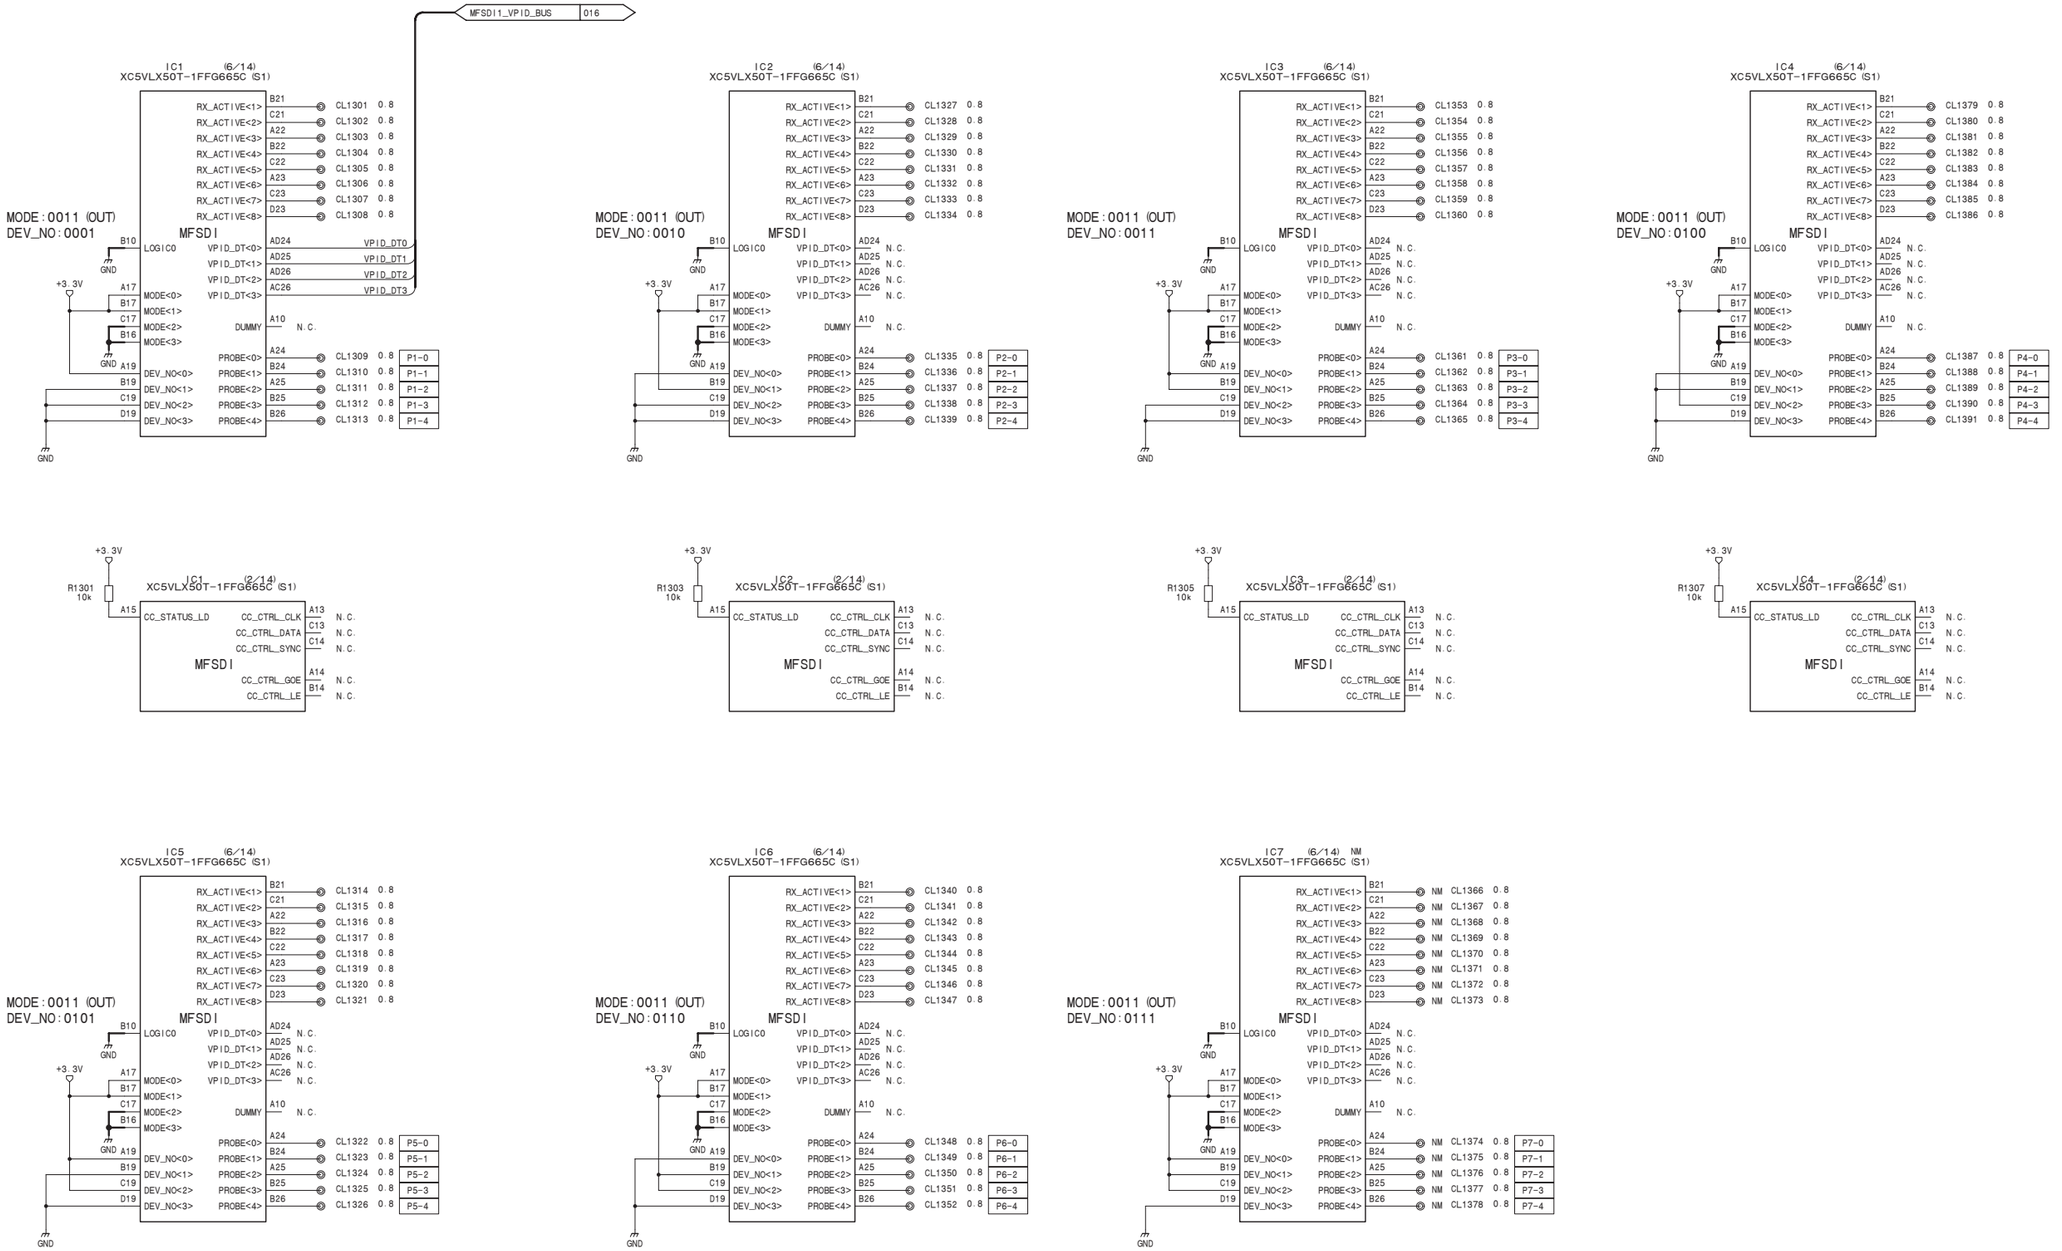

4-292

OUT-35A (14/45)

SUFFIX: -12

OUT-35A (14/45)

SUFFIX: -12

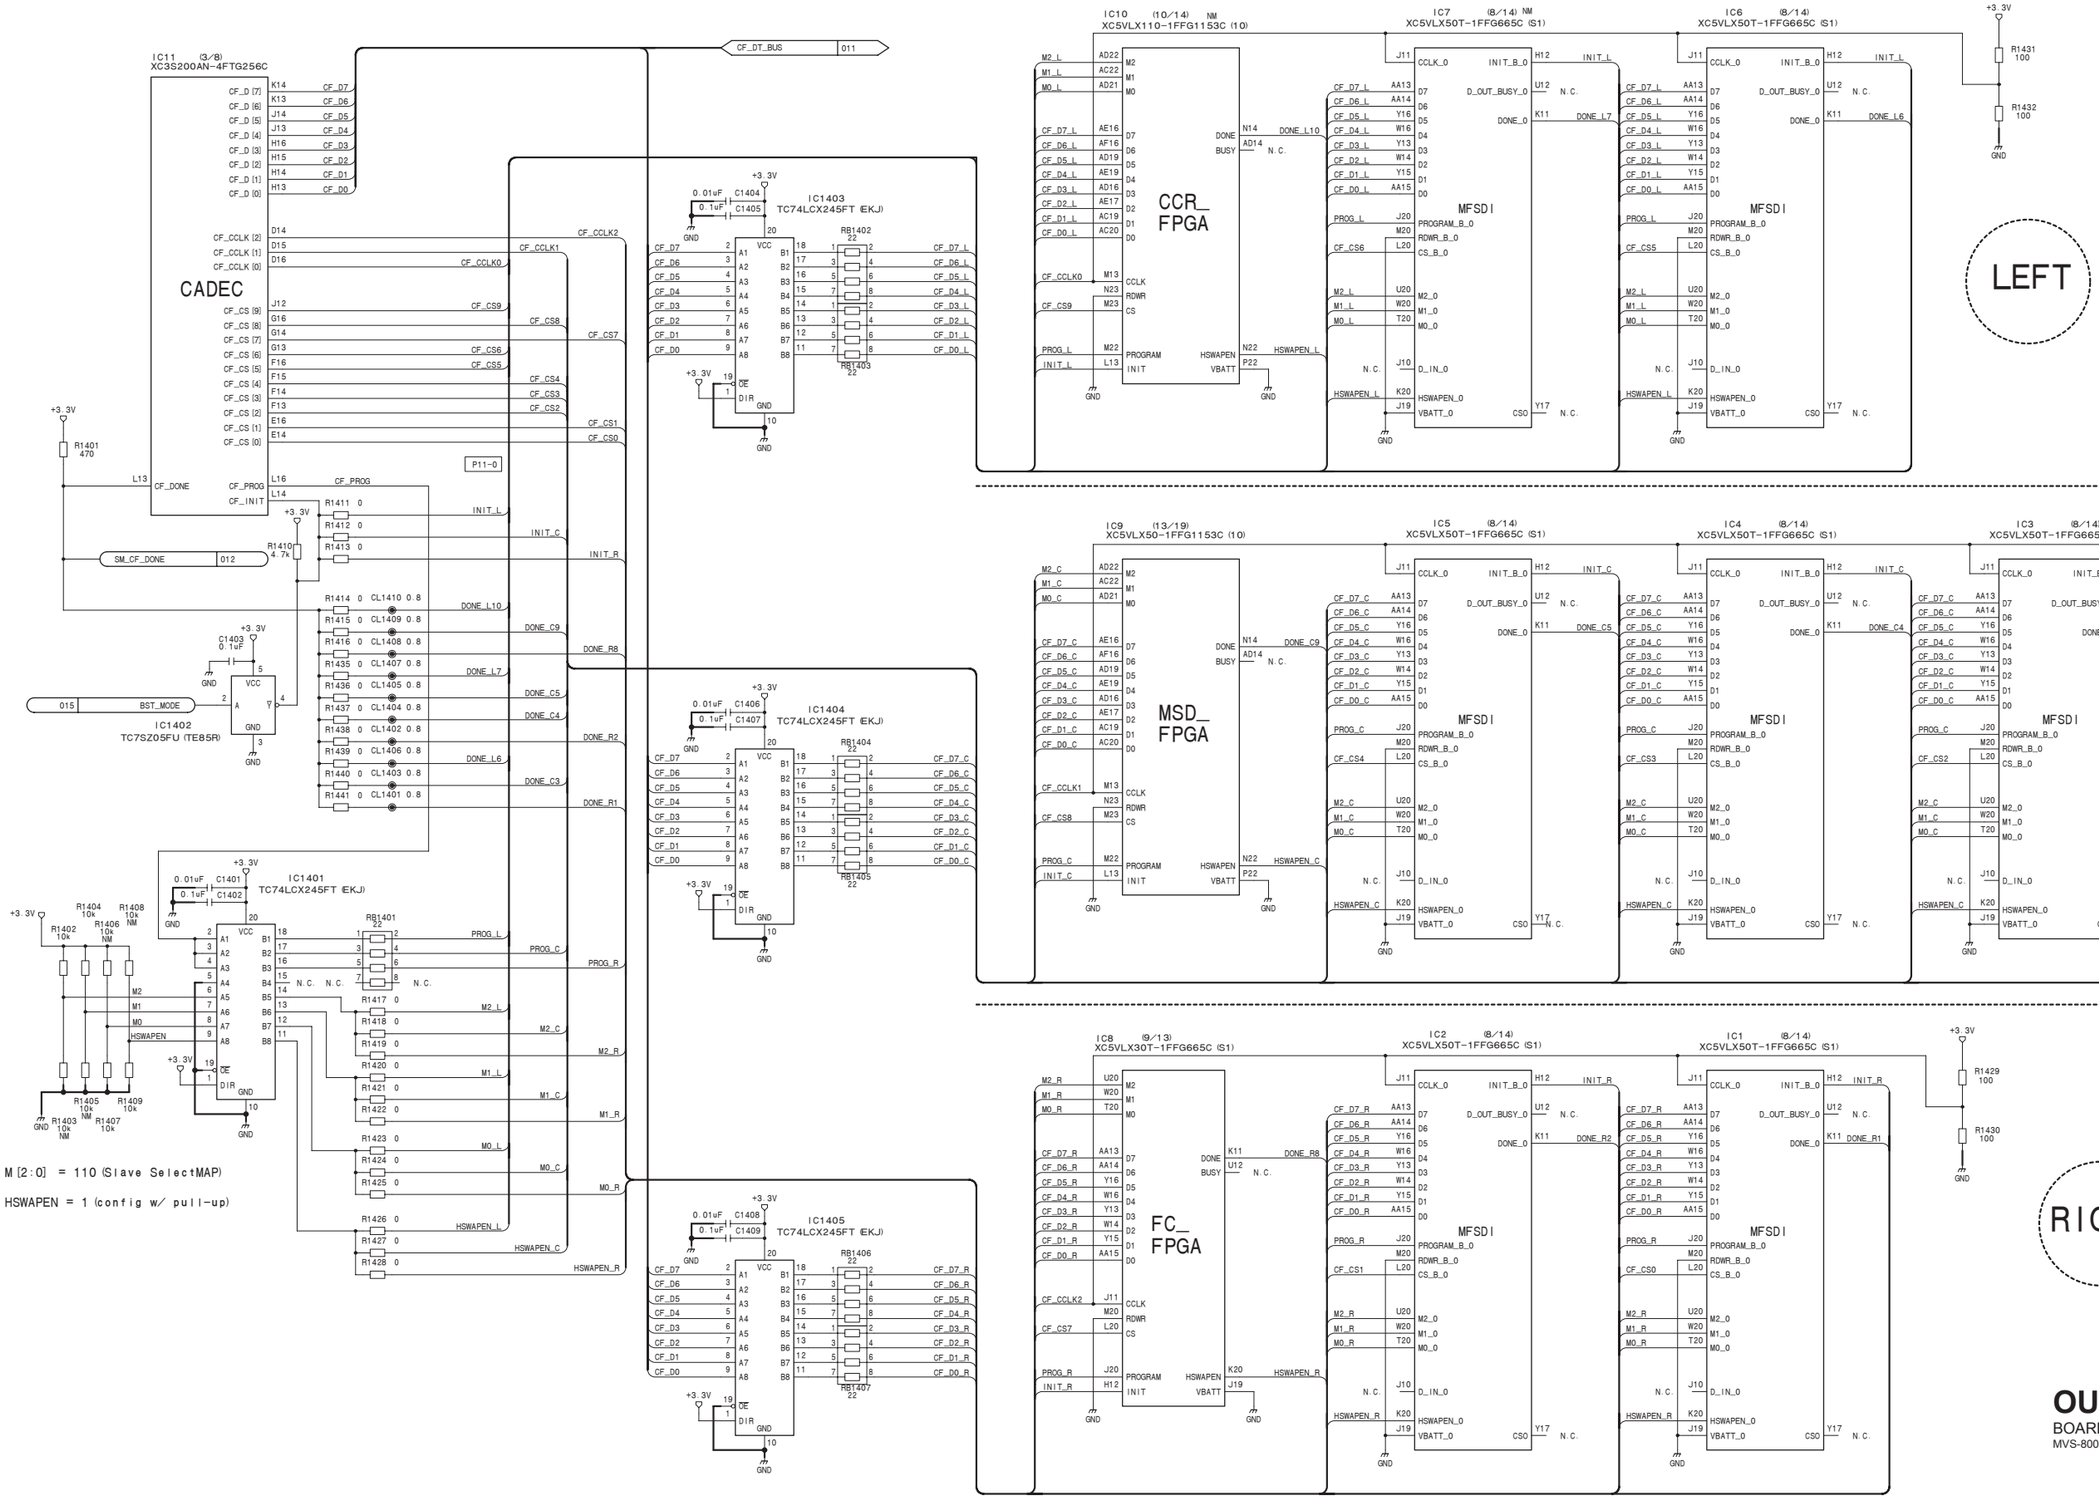

OUT-35A (14/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_14

OUT-35A (15/45)
SUFFIX: -12

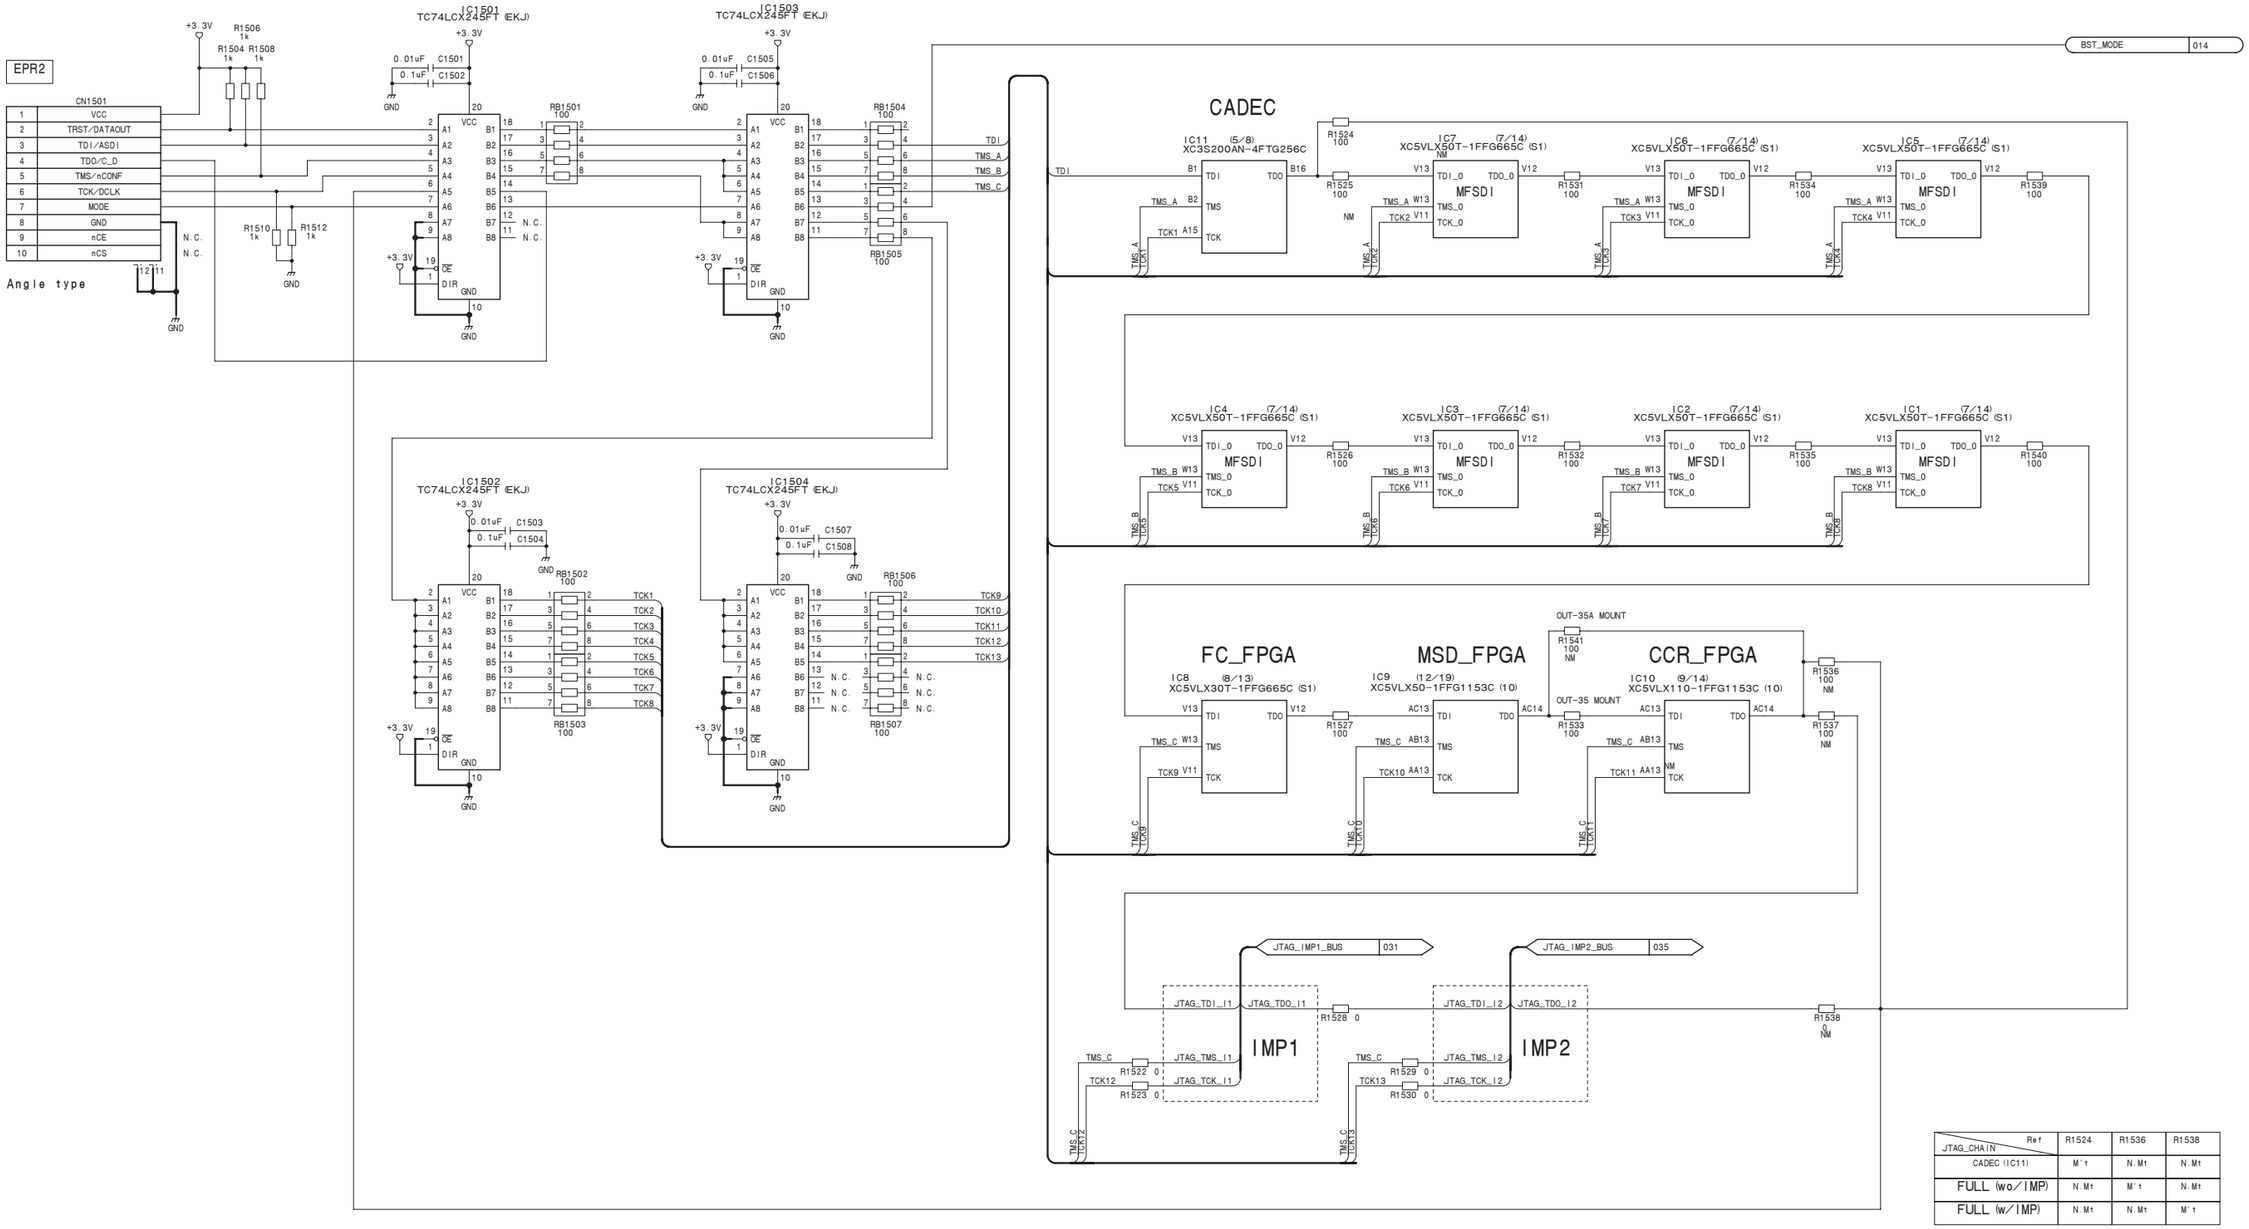

JTAG_CHAIN \ Ref	R1524	R1536	R1538
CADEC (IC11)	M*1	N.Mt	N.Mt
FULL (wo/IMP)	N.Mt	M*1	N.Mt
FULL (w/IMP)	N.Mt	N.Mt	M*1

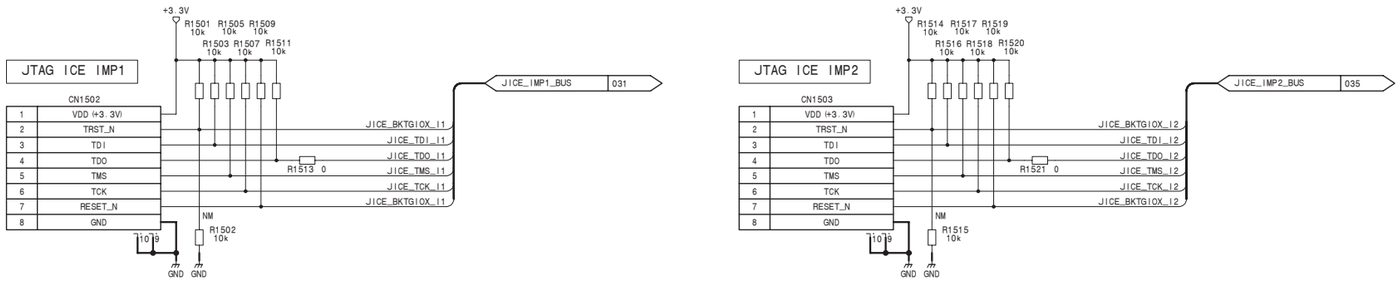

OUT-35A (15/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_15

OUT-35A (16/45)
SUFFIX: -12

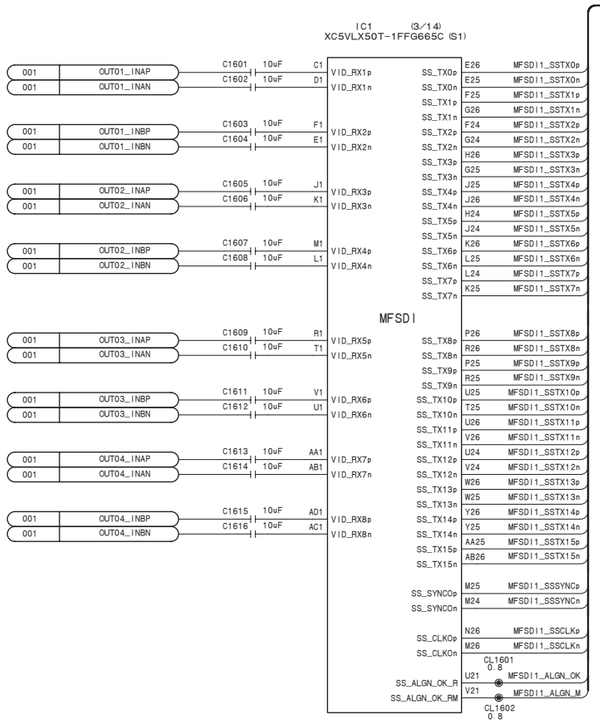

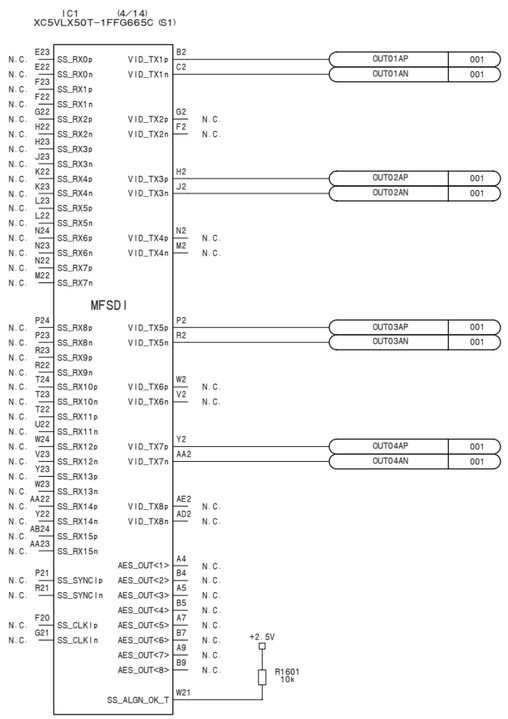

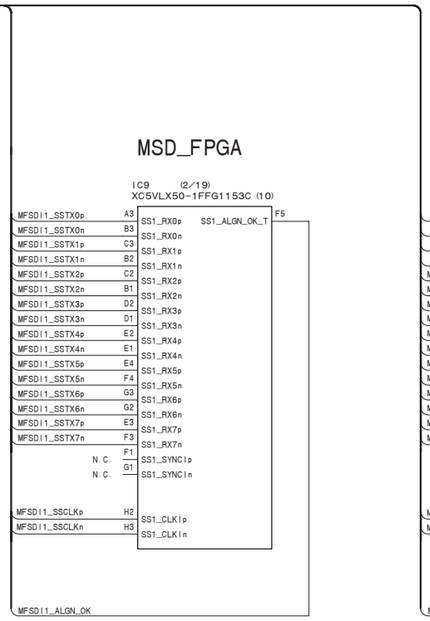

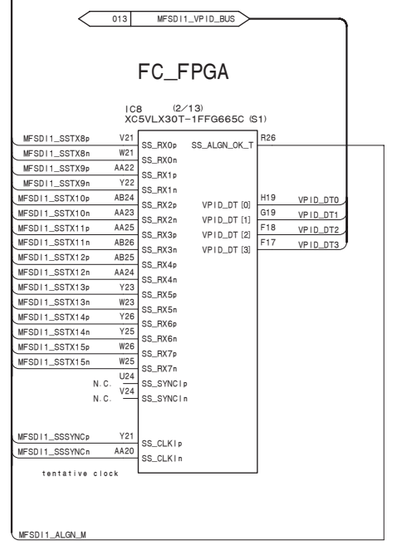

RIGHT

OUT1, 2, 3, 4, 5, 6, 7, 8

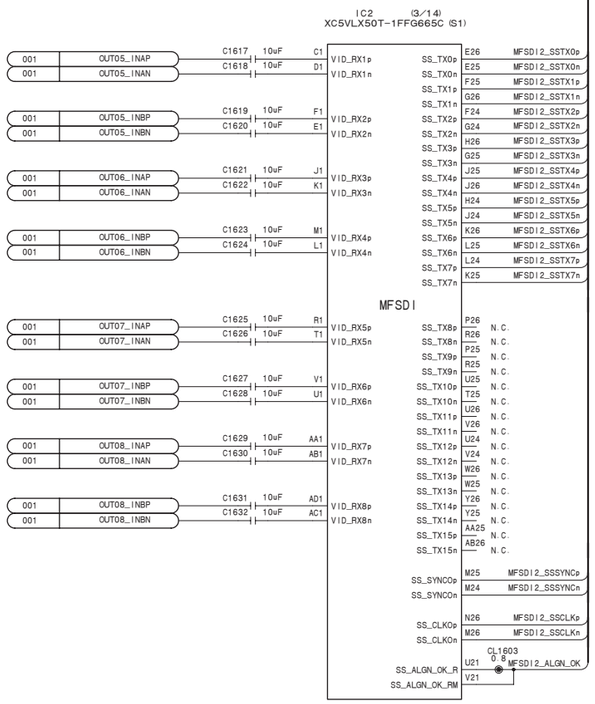

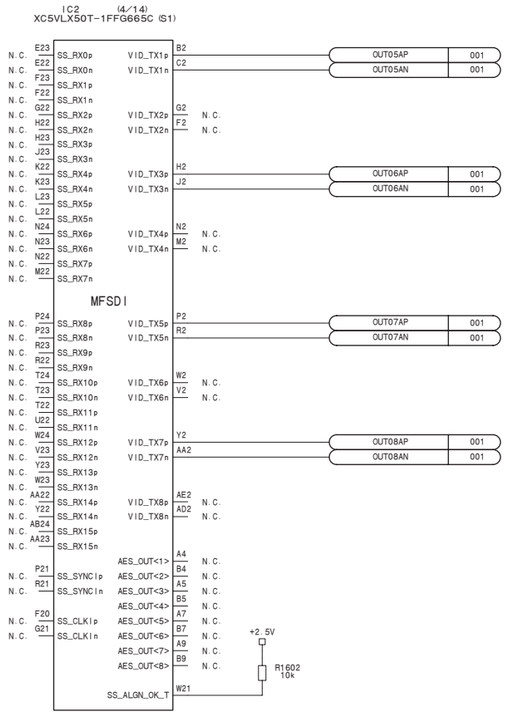

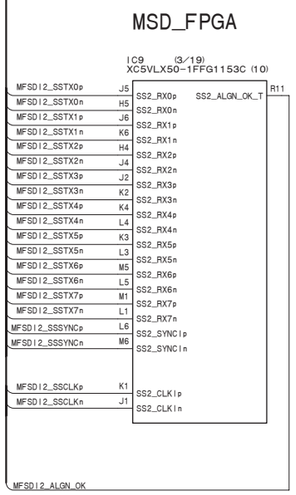

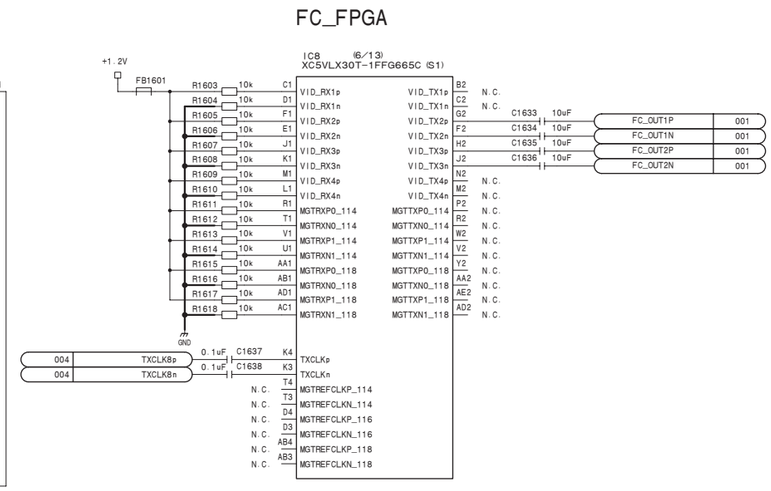

OUT-35A (16/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_16

OUT-35A (17/45) **SUFFIX: -12**

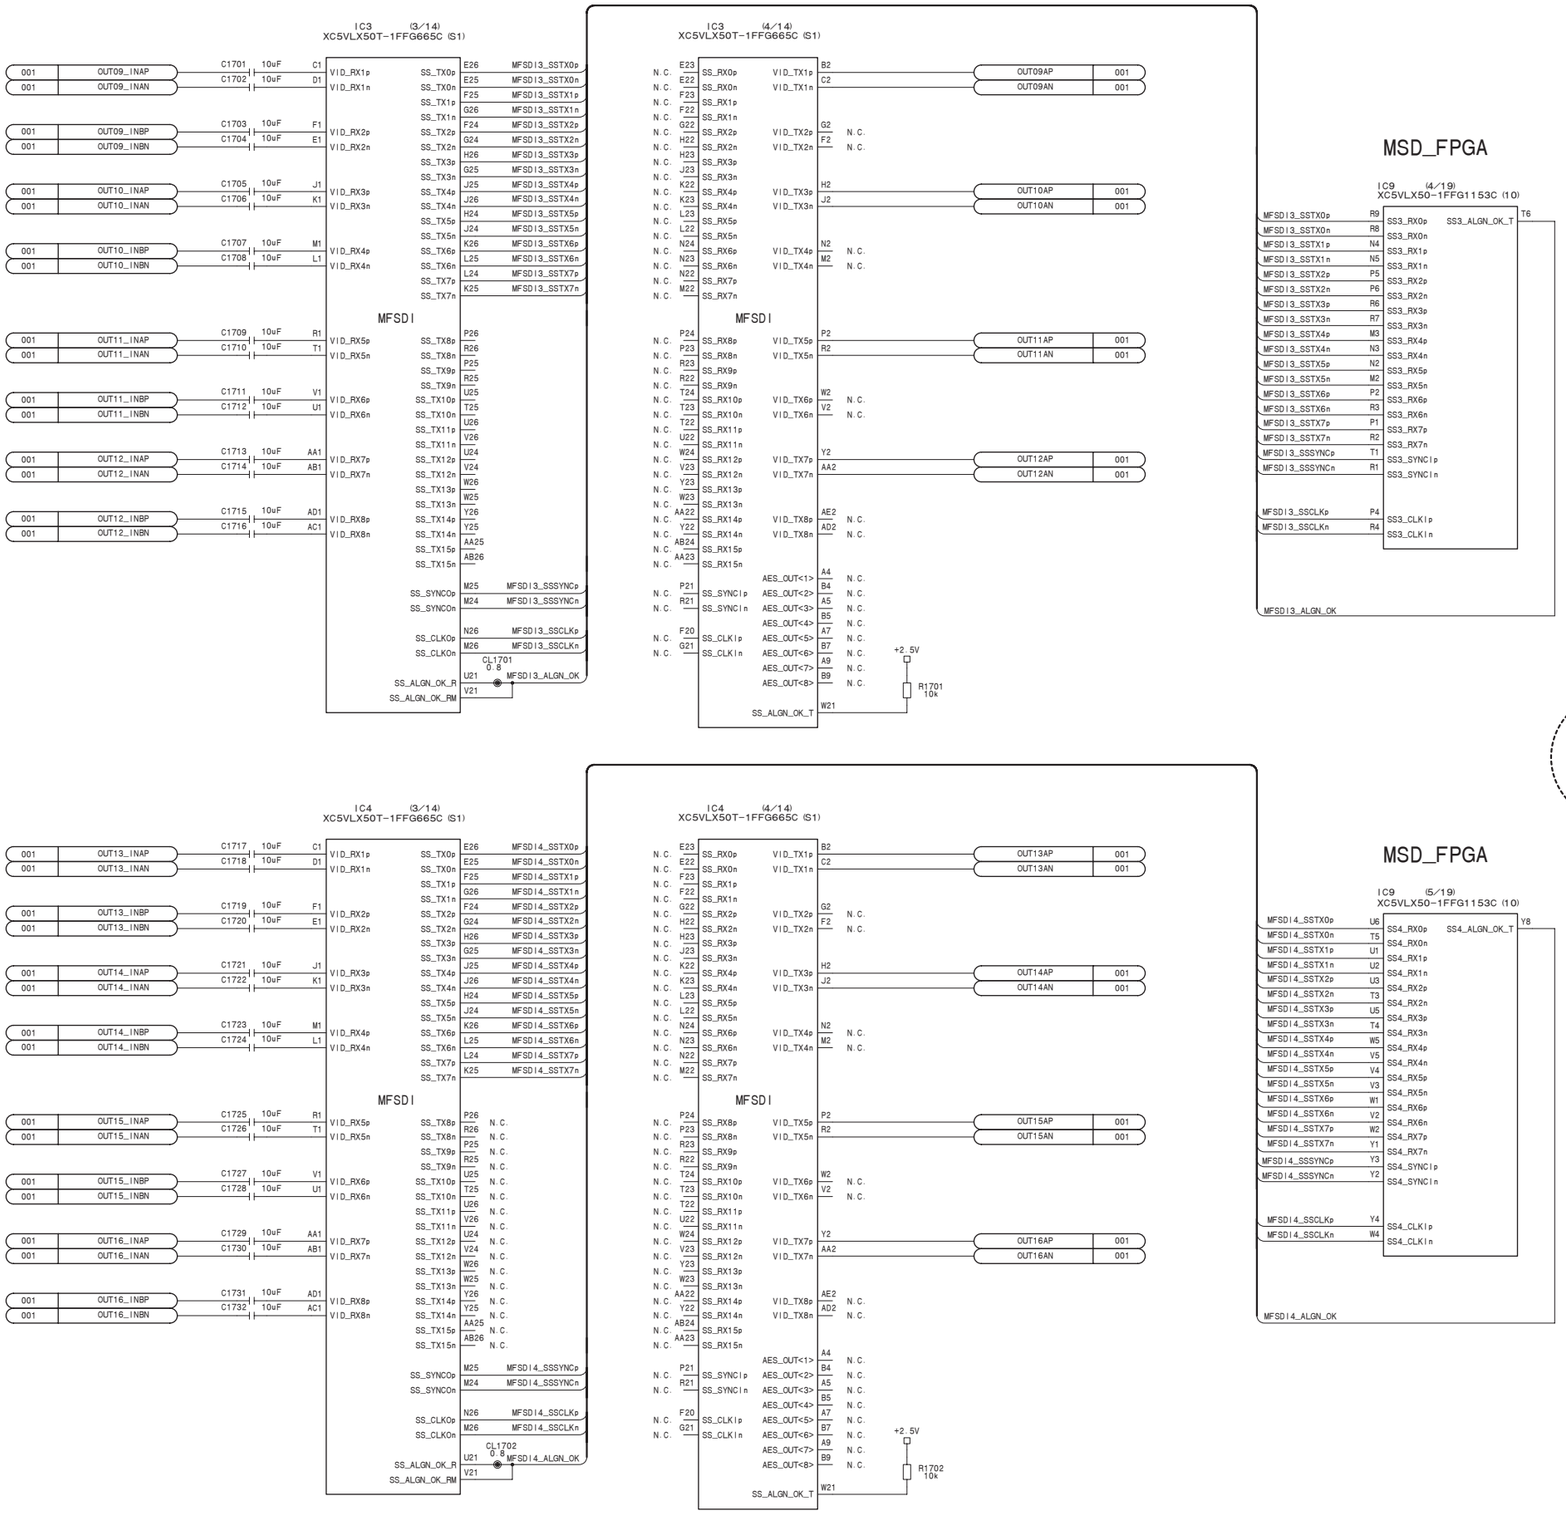

CEN TER

OUT9, 10, 11, 12, OUT13, 14, 15, 16

OUT-35A (17/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_17

CEN TER

OUT17, 18, 19, 20, MSD_OUT

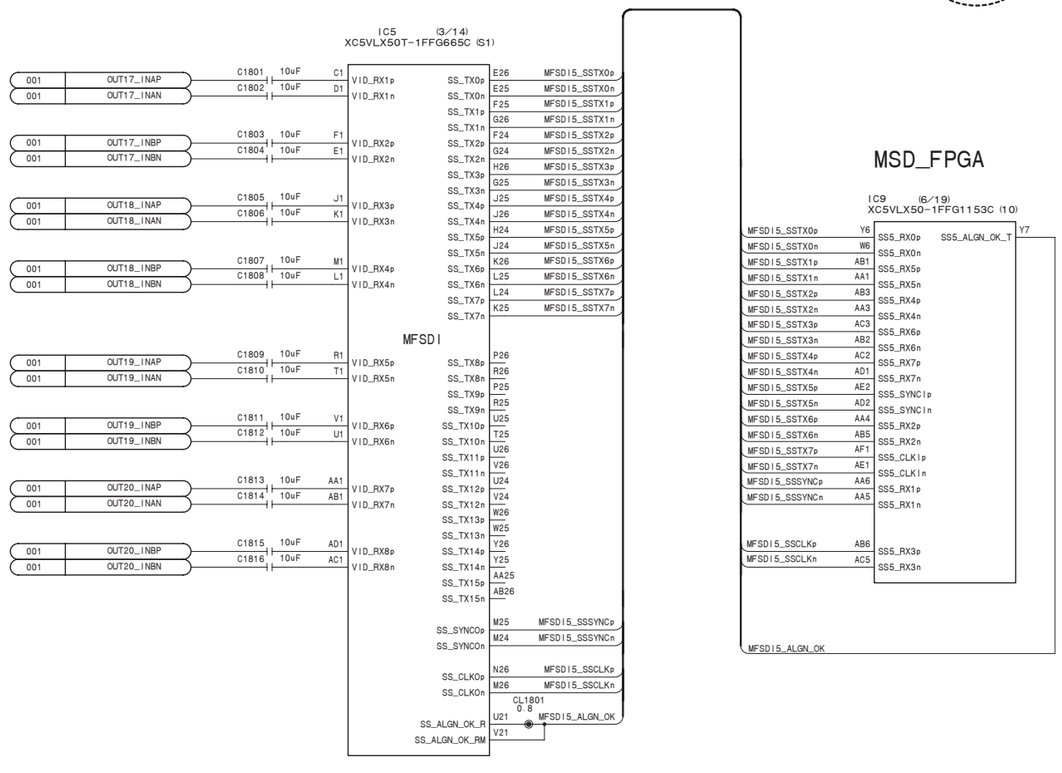

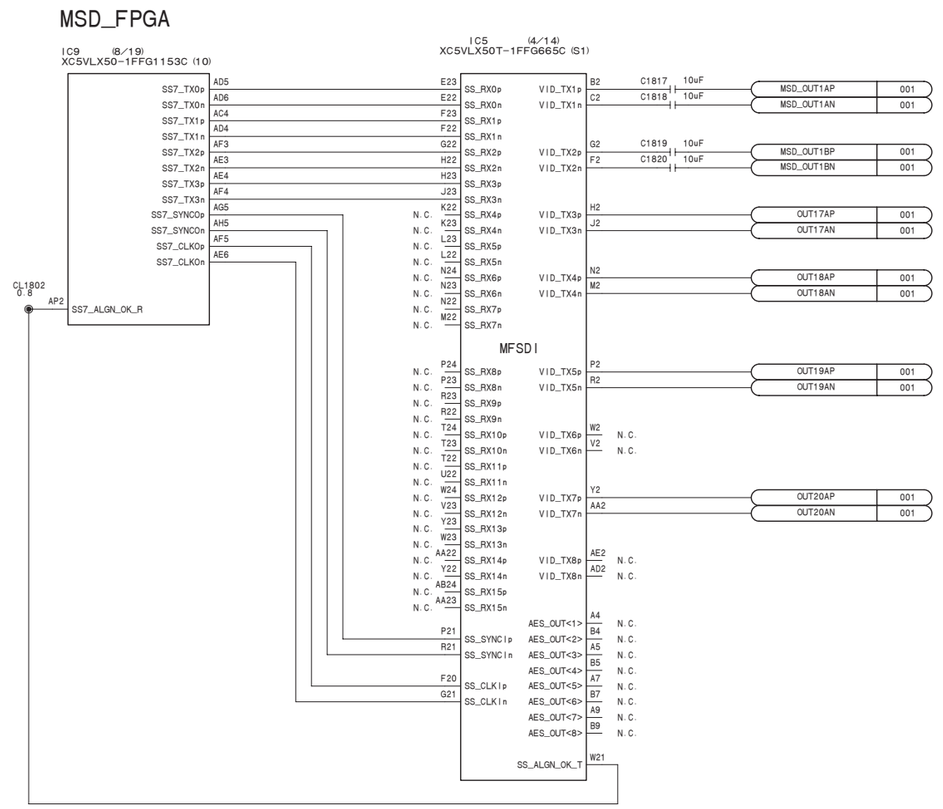

OUT-35A (18/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_18

OUT-35A (19/45)
SUFFIX: -12

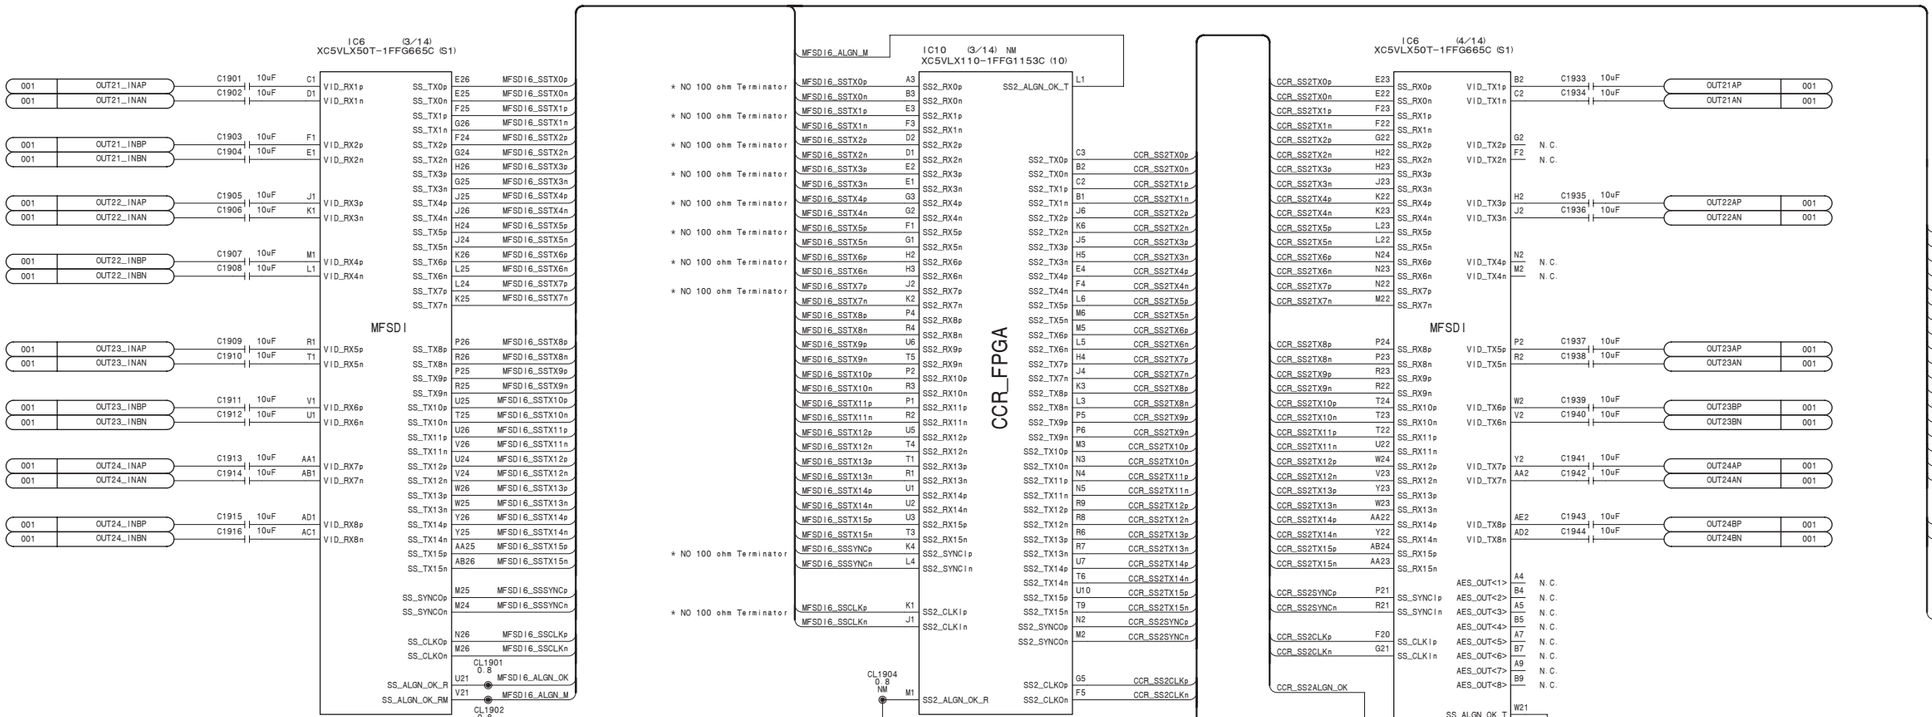

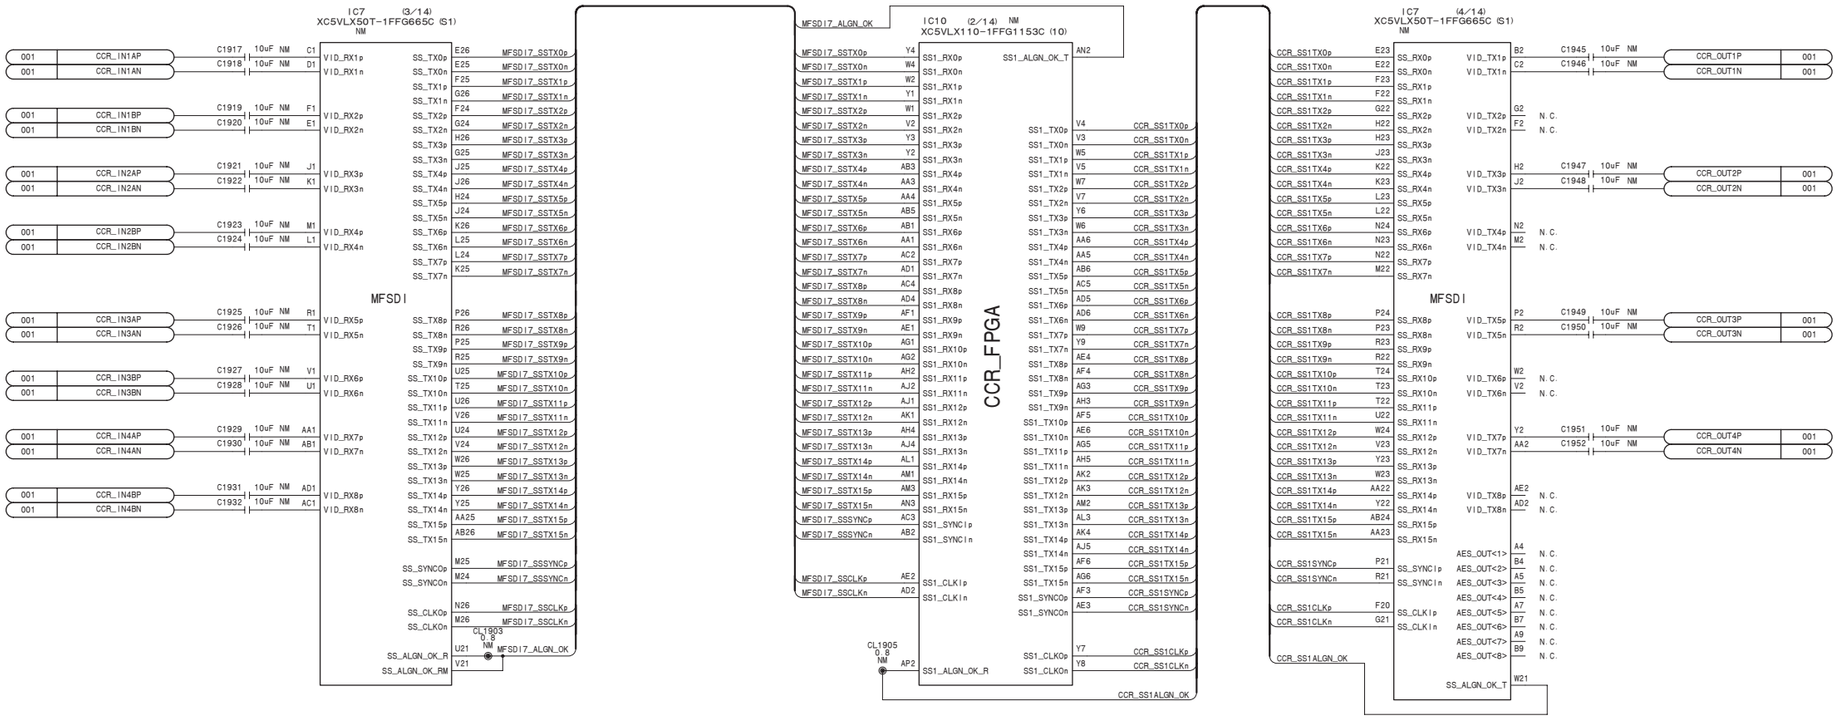

LEFT

OUT21, 22, 23, 24
CCR1, 2, 3, 4

OUT-35A (19/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_19

OUT-35A (20/45)
SUFFIX: -12

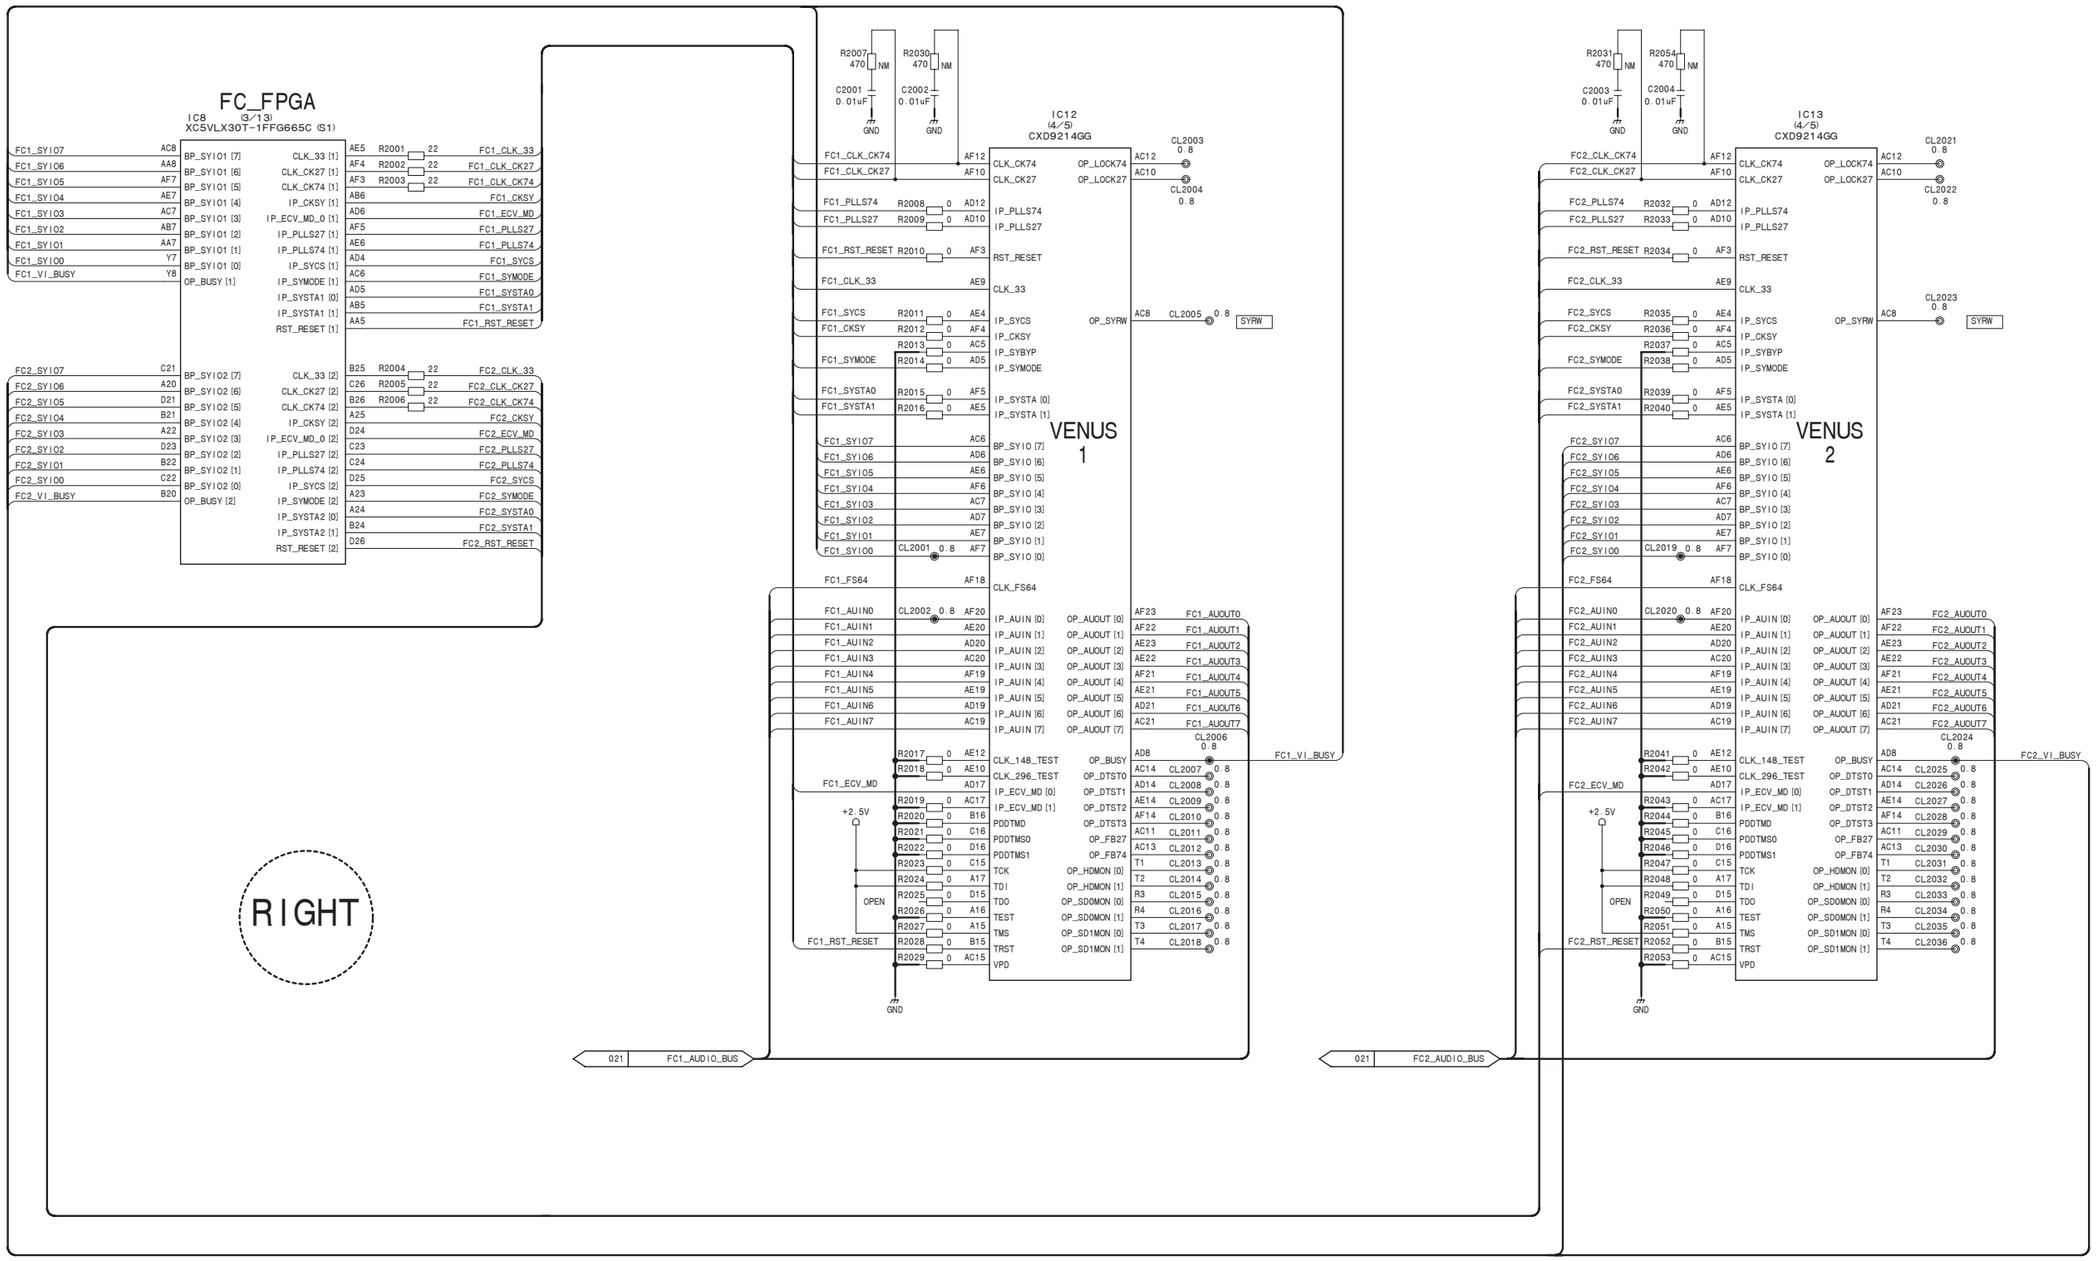

OUT-35A (20/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_20

OUT-35A (21/45)
SUFFIX: -12

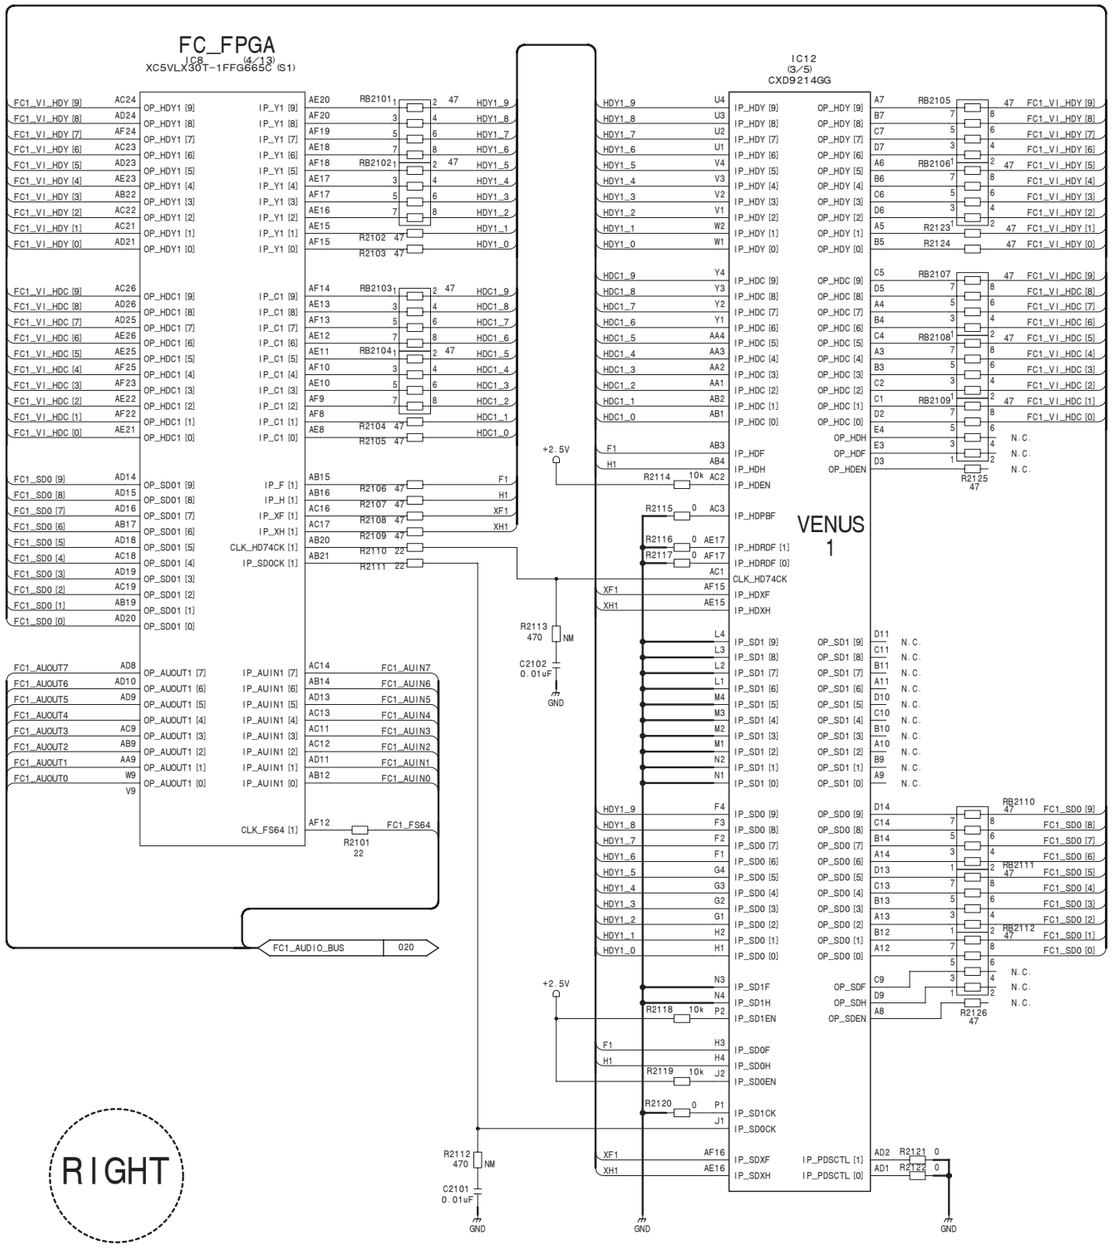
FC_FPGA
IC8 (4/13)
XC5VLX30T-1FFG665C (S1)
IC12
(3/5)
CXD9214GG
VENUS
1
FC1_AUDIO_BUS
020
CLK_FS64 [1]
FC1_FS64
R2101
22
+2.5V
GND
R2102 47
R2103 47
R2104 47
R2105 47
R2106 47
R2107 47
R2108 47
R2109 47
R2110 22
R2111 22
R2113
470
NM
C2102
0.01uF
R2114 10k
R2115 0
R2116 0
R2117 0
R2118 10k
R2119 10k
R2120 0
R2112
470
NM
C2101
0.01uF
R2121 0
R2122 0
RB2101 47
RB2102 47
RB2103 47
RB2104 47
RB2105 47
RB2106 47
RB2107 47
RB2108 47
RB2109 47
RB2110 47
RB2111 47
RB2112 47
R2123 47
R2124 47
R2125 47
R2126 47
R2127
22
FC1_AUOUT7
FC1_AUOUT6
FC1_AUOUT5
FC1_AUOUT4
FC1_AUOUT3
FC1_AUOUT2
FC1_AUOUT1
FC1_AUOUT0
OP_AUOUT1 [7]
OP_AUOUT1 [6]
OP_AUOUT1 [5]
OP_AUOUT1 [4]
OP_AUOUT1 [3]
OP_AUOUT1 [2]
OP_AUOUT1 [1]
OP_AUOUT1 [0]
IP_AUIN1 [7]
IP_AUIN1 [6]
IP_AUIN1 [5]
IP_AUIN1 [4]
IP_AUIN1 [3]
IP_AUIN1 [2]
IP_AUIN1 [1]
IP_AUIN1 [0]
FC1_AUIN7
FC1_AUIN6
FC1_AUIN5
FC1_AUIN4
FC1_AUIN3
FC1_AUIN2
FC1_AUIN1
FC1_AUIN0
FC1_VI_HDY [9]
FC1_VI_HDY [8]
FC1_VI_HDY [7]
FC1_VI_HDY [6]
FC1_VI_HDY [5]
FC1_VI_HDY [4]
FC1_VI_HDY [3]
FC1_VI_HDY [2]
FC1_VI_HDY [1]
FC1_VI_HDY [0]
FC1_VI_HDC [9]
FC1_VI_HDC [8]
FC1_VI_HDC [7]
FC1_VI_HDC [6]
FC1_VI_HDC [5]
FC1_VI_HDC [4]
FC1_VI_HDC [3]
FC1_VI_HDC [2]
FC1_VI_HDC [1]
FC1_VI_HDC [0]
OP_HDY1 [9]
OP_HDY1 [8]
OP_HDY1 [7]
OP_HDY1 [6]
OP_HDY1 [5]
OP_HDY1 [4]
OP_HDY1 [3]
OP_HDY1 [2]
OP_HDY1 [1]
OP_HDY1 [0]
OP_HDC1 [9]
OP_HDC1 [8]
OP_HDC1 [7]
OP_HDC1 [6]
OP_HDC1 [5]
OP_HDC1 [4]
OP_HDC1 [3]
OP_HDC1 [2]
OP_HDC1 [1]
OP_HDC1 [0]
IP_Y1 [9]
IP_Y1 [8]
IP_Y1 [7]
IP_Y1 [6]
IP_Y1 [5]
IP_Y1 [4]
IP_Y1 [3]
IP_Y1 [2]
IP_Y1 [1]
IP_Y1 [0]
IP_C1 [9]
IP_C1 [8]
IP_C1 [7]
IP_C1 [6]
IP_C1 [5]
IP_C1 [4]
IP_C1 [3]
IP_C1 [2]
IP_C1 [1]
IP_C1 [0]
HDY1_9
HDY1_8
HDY1_7
HDY1_6
HDY1_5
HDY1_4
HDY1_3
HDY1_2
HDY1_1
HDY1_0
HDC1_9
HDC1_8
HDC1_7
HDC1_6
HDC1_5
HDC1_4
HDC1_3
HDC1_2
HDC1_1
HDC1_0
IP_HDY [9]
IP_HDY [8]
IP_HDY [7]
IP_HDY [6]
IP_HDY [5]
IP_HDY [4]
IP_HDY [3]
IP_HDY [2]
IP_HDY [1]
IP_HDY [0]
IP_HDC [9]
IP_HDC [8]
IP_HDC [7]
IP_HDC [6]
IP_HDC [5]
IP_HDC [4]
IP_HDC [3]
IP_HDC [2]
IP_HDC [1]
IP_HDC [0]
IP_HDF
IP_HDH
IP_HDEN
IP_HDPBF
IP_HDRDF [1]
IP_HDRDF [0]
IP_HDCLK
IP_HDXF
IP_HDXH
OP_HDY [9]
OP_HDY [8]
OP_HDY [7]
OP_HDY [6]
OP_HDY [5]
OP_HDY [4]
OP_HDY [3]
OP_HDY [2]
OP_HDY [1]
OP_HDY [0]
OP_HDC [9]
OP_HDC [8]
OP_HDC [7]
OP_HDC [6]
OP_HDC [5]
OP_HDC [4]
OP_HDC [3]
OP_HDC [2]
OP_HDC [1]
OP_HDC [0]
OP_HDH
OP_HDF
OP_HDEN
F1
H1
XF1
XH1
IP_F [1]
IP_H [1]
IP_XF [1]
IP_XH [1]
CLK_HD74CK [1]
IP_SDOCK [1]
AB15
AB16
AC16
AC17
AB20
AB21
AB3
AB4
AC2
AC3
AE17
AF17
AC1
AF15
AE15
AF1
AG1
AG2
AG3
AH1
AH2
AH3
AJ1
AJ2
AJ3
AK1
AK2
AK3
AL1
AL2
AL3
AM1
AM2
AM3
AN1
AN2
AN3
AP1
AP2
AP3
AR1
AR2
AR3
AT1
AT2
AT3
AU1
AU2
AU3
AV1
AV2
AV3
AW1
AW2
AW3
AY1
AY2
AY3
BA1
BA2
BA3
BB1
BB2
BB3
BC1
BC2
BC3
BD1
BD2
BD3
BE1
BE2
BE3
BF1
BF2
BF3
BG1
BG2
BG3
BH1
BH2
BH3
BJ1
BJ2
BJ3
BK1
BK2
BK3
BL1
BL2
BL3
BM1
BM2
BM3
BN1
BN2
BN3
BP1
BP2
BP3
BR1
BR2
BR3
BT1
BT2
BT3
BU1
BU2
BU3
BV1
BV2
BV3
BW1
BW2
BW3
BY1
BY2
BY3
CA1
CA2
CA3
CB1
CB2
CB3
CC1
CC2
CC3
CD1
CD2
CD3
CE1
CE2
CE3
CF1
CF2
CF3
CG1
CG2
CG3
CH1
CH2
CH3
CJ1
CJ2
CJ3
CK1
CK2
CK3
CL1
CL2
CL3
CM1
CM2
CM3
CN1
CN2
CN3
CP1
CP2
CP3
CR1
CR2
CR3
CT1
CT2
CT3
CU1
CU2
CU3
CV1
CV2
CV3
CW1
CW2
CW3
CY1
CY2
CY3
DA1
DA2
DA3
DB1
DB2
DB3
DC1
DC2
DC3
DD1
DD2
DD3
DE1
DE2
DE3
DF1
DF2
DF3
DG1
DG2
DG3
DH1
DH2
DH3
DJ1
DJ2
DJ3
DK1
DK2
DK3
DL1
DL2
DL3
DM1
DM2
DM3
DN1
DN2
DN3
DP1
DP2
DP3
DR1
DR2
DR3
DT1
DT2
DT3
DU1
DU2
DU3
DV1
DV2
DV3
DW1
DW2
DW3
DY1
DY2
DY3
EA1
EA2
EA3
EB1
EB2
EB3
EC1
EC2
EC3
ED1
ED2
ED3
EE1
EE2
EE3
EF1
EF2
EF3
EG1
EG2
EG3
EH1
EH2
EH3
EJ1
EJ2
EJ3
EK1
EK2
EK3
EL1
EL2
EL3
EM1
EM2
EM3
EN1
EN2
EN3
EP1
EP2
EP3
ER1
ER2
ER3
ET1
ET2
ET3
EU1
EU2
EU3
EV1
EV2
EV3
EW1
EW2
EW3
EY1
EY2
EY3
FA1
FA2
FA3
FB1
FB2
FB3
FC1
FC2
FC3
FD1
FD2
FD3
FE1
FE2
FE3
FF1
FF2
FF3
FG1
FG2
FG3
FH1
FH2
FH3
FJ1
FJ2
FJ3
FK1
FK2
FK3
FL1
FL2
FL3
FM1
FM2
FM3
FN1
FN2
FN3
FP1
FP2
FP3
FR1
FR2
FR3
FT1
FT2
FT3
FU1
FU2
FU3
FV1
FV2
FV3
FW1
FW2
FW3
FY1
FY2
FY3
GA1
GA2
GA3
GB1
GB2
GB3
GC1
GC2
GC3
GD1
GD2
GD3
GE1
GE2
GE3
GF1
GF2
GF3
GG1
GG2
GG3
GH1
GH2
GH3
GJ1
GJ2
GJ3
GK1
GK2
GK3
GL1
GL2
GL3
GM1
GM2
GM3
GN1
GN2
GN3
GP1
GP2
GP3
GR1
GR2
GR3
GT1
GT2
GT3
GU1
GU2
GU3
GV1
GV2
GV3
GW1
GW2
GW3
GY1
GY2
GY3
HA1
HA2
HA3
HB1
HB2
HB3
HC1
HC2
HC3
HD1
HD2
HD3
HE1
HE2
HE3
HF1
HF2
HF3
HG1
HG2
HG3
HH1
HH2
HH3
HJ1
HJ2
HJ3
HK1
HK2
HK3
HL1
HL2
HL3
HM1
HM2
HM3
HN1
HN2
HN3
HP1
HP2
HP3
HR1
HR2
HR3
HT1
HT2
HT3
HU1
HU2
HU3
HV1
HV2
HV3
HW1
HW2
HW3
HY1
HY2
HY3
JA1
JA2
JA3
JB1
JB2
JB3
JC1
JC2
JC3
JD1
JD2
JD3
JE1
JE2
JE3
JF1
JF2
JF3
JG1
JG2
JG3
JH1
JH2
JH3
JJ1
JJ2
JJ3
JK1
JK2
JK3
JL1
JL2
JL3
JM1
JM2
JM3
JN1
JN2
JN3
JP1
JP2
JP3
JR1
JR2
JR3
JT1
JT2
JT3
JU1
JU2
JU3
JV1
JV2
JV3
JW1
JW2
JW3
JY1
JY2
JY3
KA1
KA2
KA3
KB1
KB2
KB3
KC1
KC2
KC3
KD1
KD2
KD3
KE1
KE2
KE3
KF1
KF2
KF3
KG1
KG2
KG3
KH1
KH2
KH3
KJ1
KJ2
KJ3
KK1
KK2
KK3
KL1
KL2
KL3
KM1
KM2
KM3
KN1
KN2
KN3
KP1
KP2
KP3
KR1
KR2
KR3
KT1
KT2
KT3
KU1
KU2
KU3
KV1
KV2
KV3
KW1
KW2
KW3
KY1
KY2
KY3
LA1
LA2
LA3
LB1
LB2
LB3
LC1
LC2
LC3
LD1
LD2
LD3
LE1
LE2
LE3
LF1
LF2
LF3
LG1
LG2
LG3
LH1
LH2
LH3
LJ1
LJ2
LJ3
LK1
LK2
LK3
LL1
LL2
LL3
LM1
LM2
LM3
LN1
LN2
LN3
LP1
LP2
LP3
LR1
LR2
LR3
LT1
LT2
LT3
LU1
LU2
LU3
LV1
LV2
LV3
LW1
LW2
LW3
LY1
LY2
LY3
MA1
MA2
MA3
MB1
MB2
MB3
MC1
MC2
MC3
MD1
MD2
MD3
ME1
ME2
ME3
MF1
MF2
MF3
MG1
MG2
MG3
MH1
MH2
MH3
MJ1
MJ2
MJ3
MK1
MK2
MK3
ML1
ML2
ML3
MM1
MM2
MM3
MN1
MN2
MN3
MP1
MP2
MP3
MR1
MR2
MR3
MT1
MT2
MT3
MU1
MU2
MU3
MV1
MV2
MV3
MW1
MW2
MW3
MY1
MY2
MY3
NA1
NA2
NA3
NB1
NB2
NB3
NC1
NC2
NC3
ND1
ND2
ND3
NE1
NE2
NE3
NF1
NF2
NF3
NG1
NG2
NG3
NH1
NH2
NH3
NJ1
NJ2
NJ3
NK1
NK2
NK3
NL1
NL2
NL3
NM1
NM2
NM3
NN1
NN2
NN3
NP1
NP2
NP3
NR1
NR2
NR3
NT1
NT2
NT3
NU1
NU2
NU3
NV1
NV2
NV3
NW1
NW2
NW3
NY1
NY2
NY3
PA1
PA2
PA3
PB1
PB2
PB3
PC1
PC2
PC3
PD1
PD2
PD3
PE1
PE2
PE3
PF1
PF2
PF3
PG1
PG2
PG3
PH1
PH2
PH3
PJ1
PJ2
PJ3
PK1
PK2
PK3
PL1
PL2
PL3
PM1
PM2
PM3
PN1
PN2
PN3
PP1
PP2
PP3
PR1
PR2
PR3
PT1
PT2
PT3
PU1
PU2
PU3
PV1
PV2
PV3
PW1
PW2
PW3
PY1
PY2
PY3
RA1
RA2
RA3
RB1
RB2
RB3
RC1
RC2
RC3
RD1
RD2
RD3
RE1
RE2
RE3
RF1
RF2
RF3
RG1
RG2
RG3
RH1
RH2
RH3
RJ1
RJ2
RJ3
RK1
RK2
RK3
RL1
RL2
RL3
RM1
RM2
RM3
RN1
RN2
RN3
RP1
RP2
RP3
RR1
RR2
RR3
RT1
RT2
RT3
RU1
RU2
RU3
RV1
RV2
RV3
RW1
RW2
RW3
RY1
RY2
RY3
SA1
SA2
SA3
SB1
SB2
SB3
SC1
SC2
SC3
SD1
SD2
SD3
SE1
SE2
SE3
SF1
SF2
SF3
SG1
SG2
SG3
SH1
SH2
SH3
SJ1
SJ2
SJ3
SK1
SK2
SK3
SL1
SL2
SL3
SM1
SM2
SM3
SN1
SN2
SN3
SP1
SP2
SP3
SR1
SR2
SR3
ST1
ST2
ST3
SU1
SU2
SU3
SV1
SV2
SV3
SW1
SW2
SW3
SY1
SY2
SY3
TA1
TA2
TA3
TB1
TB2
TB3
TC1
TC2
TC3
TD1
TD2
TD3
TE1
TE2
TE3
TF1
TF2
TF3
TG1
TG2
TG3
TH1
TH2
TH3
TJ1
TJ2
TJ3
TK1
TK2
TK3
TL1
TL2
TL3
TM1
TM2
TM3
TN1
TN2
TN3
TP1
TP2
TP3
TR1
TR2
TR3
TT1
TT2
TT3
TU1
TU2
TU3
TV1
TV2
TV3
TW1
TW2
TW3
TY1
TY2
TY3
UA1
UA2
UA3
UB1
UB2
UB3
UC1
UC2
UC3
UD1
UD2
UD3
UE1
UE2
UE3
UF1
UF2
UF3
UG1
UG2
UG3
UH1
UH2
UH3
UJ1
UJ2
UJ3
UK1
UK2
UK3
UL1
UL2
UL3
UM1
UM2
UM3
UN1
UN2
UN3
UP1
UP2
UP3
UR1
UR2
UR3
UT1
UT2
UT3
UU1
UU2
UU3
UV1
UV2
UV3
UW1
UW2
UW3
UY1
UY2
UY3
VA1
VA2
VA3
VB1
VB2
VB3
VC1
VC2
VC3
VD1
VD2
VD3
VE1
VE2
VE3
VF1
VF2
VF3
VG1
VG2
VG3
VH1
VH2
VH3
VJ1
VJ2
VJ3
VK1
VK2
VK3
VL1
VL2
VL3
VM1
VM2
VM3
VN1
VN2
VN3
VP1
VP2
VP3
VR1
VR2
VR3
VT1
VT2
VT3
VU1
VU2
VU3
VV1
VV2
VV3
VW1
VW2
VW3
VY1
VY2
VY3
WA1
WA2
WA3
WB1
WB2
WB3
WC1
WC2
WC3
WD1
WD2
WD3
WE1
WE2
WE3
WF1
WF2
WF3
WG1
WG2
WG3
WH1
WH2
WH3
WJ1
WJ2
WJ3
WK1
WK2
WK3
WL1
WL2
WL3
WM1
WM2
WM3
WN1
WN2
WN3
WP1
WP2
WP3
WR1
WR2
WR3
WT1
WT2
WT3
WU1
WU2
WU3
WV1
WV2
WV3
WW1
WW2
WW3
WY1
WY2
WY3
YA1
YA2
YA3
YB1
YB2
YB3
YC1
YC2
YC3
YD1
YD2
YD3
YE1
YE2
YE3
YF1
YF2
YF3
YG1
YG2
YG3
YH1
YH2
YH3
YJ1
YJ2
YJ3
YK1
YK2
YK3
YL1
YL2
YL3
YM1
YM2
YM3
YN1
YN2
YN3
YP1
YP2
YP3
YR1
YR2
YR3
YT1
YT2
YT3
YU1
YU2
YU3
YV1
YV2
YV3
YW1
YW2
YW3
YY1
YY2
YY3
AA1
AA2
AA3
AB1
AB2
AB3
AC1
AC2
AC3
AD1
AD2
AD3
AE1
AE2
AE3
AF1
AF2
AF3
AG1
AG2
AG3
AH1
AH2
AH3
AJ1
AJ2
AJ3
AK1
AK2
AK3
AL1
AL2
AL3
AM1
AM2
AM3
AN1
AN2
AN3
AP1
AP2
AP3
AR1
AR2
AR3
AT1
AT2
AT3
AU1
AU2
AU3
AV1
AV2
AV3
AW1
AW2
AW3
AY1
AY2
AY3
BA1
BA2
BA3
BB1
BB2
BB3
BC1
BC2
BC3
BD1
BD2
BD3
BE1
BE2
BE3
BF1
BF2
BF3
BG1
BG2
BG3
BH1
BH2
BH3
BJ1
BJ2
BJ3
BK1
BK2
BK3
BL1
BL2
BL3
BM1
BM2
BM3
BN1
BN2
BN3
BP1
BP2
BP3
BR1
BR2
BR3
BT1
BT2
BT3
BU1
BU2
BU3
BV1
BV2
BV3
BW1
BW2
BW3
BY1
BY2
BY3
CA1
CA2
CA3
CB1
CB2
CB3
CC1
CC2
CC3
CD1
CD2
CD3
CE1
CE2
CE3
CF1
CF2
CF3
CG1
CG2
CG3
CH1
CH2
CH3
CJ1
CJ2
CJ3
CK1
CK2
CK3
CL1
CL2
CL3
CM1
CM2
CM3
CN1
CN2
CN3
CP1
CP2
CP3
CR1
CR2
CR3
CT1
CT2
CT3
CU1
CU2
CU3
CV1
CV2
CV3
CW1
CW2
CW3
CY1
CY2
CY3
DA1
DA2
DA3
DB1
DB2
DB3
DC1
DC2
DC3
DD1
DD2
DD3
DE1
DE2
DE3
DF1
DF2
DF3
DG1
DG2
DG3
DH1
DH2
DH3
DJ1
DJ2
DJ3
DK1
DK2
DK3
DL1
DL2
DL3
DM1
DM2
DM3
DN1
DN2
DN3
DP1
DP2
DP3
DR1
DR2
DR3
DT1
DT2
DT3
DU1
DU2
DU3
DV1
DV2
DV3
DW1
DW2
DW3
DY1
DY2
DY3
EA1
EA2
EA3
EB1
EB2
EB3
EC1
EC2
EC3
ED1
ED2
ED3
EE1
EE2
EE3
EF1
EF2
EF3
EG1
EG2
EG3
EH1
EH2
EH3
EJ1
EJ2
EJ3
EK1
EK2
EK3
EL1
EL2
EL3
EM1
EM2
EM3
EN1
EN2
EN3
EP1
EP2
EP3
ER1
ER2
ER3
ET1
ET2
ET3
EU1
EU2
EU3
EV1
EV2
EV3
EW1
EW2
EW3
EY1
EY2
EY3
FA1
FA2
FA3
FB1
FB2
FB3
FC1
FC2
FC3
FD1
FD2
FD3
FE1
FE2
FE3
FF1
FF2
FF3
FG1
FG2
FG3
FH1
FH2
FH3
FJ1
FJ2
FJ3
FK1
FK2
FK3
FL1
FL2
FL3
FM1
FM2
FM3
FN1
FN2
FN3
FP1
FP2
FP3
FR1
FR2
FR3
FT1
FT2
FT3
FU1
FU2
FU3
FV1
FV2
FV3
FW1
FW2
FW3
FY1
FY2
FY3
GA1
GA2
GA3
GB1
GB2
GB3
GC1
GC2
GC3
GD1
GD2
GD3
GE1
GE2
GE3
GF1
GF2
GF3
GG1
GG2
GG3
GH1
GH2
GH3
GJ1
GJ2
GJ3
GK1
GK2
GK3
GL1
GL2
GL3
GM1
GM2
GM3
GN1
GN2
GN3
GP1
GP2
GP3
GR1
GR2
GR3
GT1
GT2
GT3
GU1
GU2
GU3
GV1
GV2
GV3
GW1
GW2
GW3
GY1
GY2
GY3
HA1
HA2
HA3
HB1
HB2
HB3
HC1
HC2
HC3
HD1
HD2
HD3
HE1
HE2
HE3
HF1
HF2
HF3
HG1
HG2
HG3
HH1
HH2
HH3
HJ1
HJ2
HJ3
HK1
HK2
HK3
HL1
HL2
HL3
HM1
HM2
HM3
HN1
HN2
HN3
HP1
HP2
HP3
HR1
HR2
HR3
HT1
HT2
HT3
HU1
HU2
HU3
HV1
HV2
HV3
HW1
HW2
HW3
HY1
HY2
HY3
JA1
JA2
JA3
JB1
JB2
JB3
JC1
JC2
JC3
JD1
JD2
JD3
JE1
JE2
JE3
JF1
JF2
JF3
JG1
JG2
JG3
JH1
JH2
JH3
JJ1
JJ2
JJ3
JK1
JK2
JK3
JL1
JL2
JL3
JM1
JM2
JM3
JN1
JN2
JN3
JP1
JP2
JP3
JR1
JR2
JR3
JT1
JT2
JT3
JU1
JU2
JU3
JV1
JV2
JV3
JW1
JW2
JW3
JY1
JY2
JY3
KA1
KA2
KA3
KB1
KB2
KB3
KC1
KC2
KC3
KD1
KD2
KD3
KE1
KE2
KE3
KF1
KF2
KF3
KG1
KG2
KG3
KH1
KH2
KH3
KJ1
KJ2
KJ3
KK1
KK2
KK3
KL1
KL2
KL3
KM1
KM2
KM3
KN1
KN2
KN3
KP1
KP2
KP3
KR1
KR2
KR3
KT1
KT2
KT3
KU1
KU2
KU3
KV1
KV2
KV3
KW1
KW2
KW3
KY1
KY2
KY3
LA1
LA2
LA3
LB1
LB2
LB3
LC1
LC2
LC3
LD1
LD2
LD3
LE1
LE2
LE3
LF1
LF2
LF3
LG1
LG2
LG3
LH1
LH2
LH3
LJ1
LJ2
LJ3
LK1
LK2
LK3
LL1
LL2
LL3
LM1
LM2
LM3
LN1
LN2
LN3
LP1
LP2
LP3
LR1
LR2
LR3
LT1
LT2
LT3
LU1
LU2
LU3
LV1
LV2
LV3
LW1
LW2
LW3
LY1
LY2
LY3
MA1
MA2
MA3
MB1
MB2
MB3
MC1
MC2
MC3
MD1
MD2
MD3
ME1
ME2
ME3
MF1
MF2
MF3
MG1
MG2
MG3
MH1
MH2
MH3
MJ1
MJ2
MJ3
MK1
MK2
MK3
ML1
ML2
ML3
MM1
MM2
MM3
MN1
MN2
MN3
MP1
MP2
MP3
MR1
MR2
MR3
MT1
MT2
MT3
MU1
MU2
MU3
MV1
MV2
MV3
MW1
MW2
MW3
MY1
MY2
MY3
NA1
NA2
NA3
NB1
NB2
NB3
NC1
NC2
NC3
ND1
ND2
ND3
NE1
NE2
NE3
NF1
NF2
NF3
NG1
NG2
NG3
NH1
NH2
NH3
NJ1
NJ2
NJ3
NK1
NK2
NK3
NL1
NL2
NL3
NM1
NM2
NM3
NN1
NN2
NN3
NP1
NP2
NP3
NR1
NR2
NR3
NT1
NT2
NT3
NU1
NU2
NU3
NV1
NV2
NV3
NW1
NW2
NW3
NY1
NY2
NY3
PA1
PA2
PA3
PB1
PB2
PB3
PC1
PC2
PC3
PD1
PD2
PD3
PE1
PE2
PE3
PF1
PF2
PF3
PG1
PG2
PG3
PH1
PH2
PH3
PJ1
PJ2
PJ3
PK1
PK2
PK3
PL1
PL2
PL3
PM1
PM2
PM3
PN1
PN2
PN3
PP1
PP2
PP3
PR1
PR2
PR3
PT1
PT2
PT3
PU1
PU2
PU3
PV1
PV2
PV3
PW1
PW2
PW3
PY1
PY2
PY3
RA1
RA2
RA3
RB1
RB2
RB3
RC1
RC2
RC3
RD1
RD2
RD3
RE1
RE2
RE3
RF1
RF2
RF3
RG1
RG2
RG3
RH1
RH2
RH3
RJ1
RJ2
RJ3
RK1
RK2
RK3
RL1
RL2
RL3
RM1
RM2
RM3
RN1
RN2
RN3
RP1
RP2
RP3
RR1
RR2
RR3
RT1
RT2
RT3
RU1
RU2
RU3
RV1
RV2
RV3
RW1
RW2
RW3
RY1
RY2
RY3
SA1
SA2
SA3
SB1
SB2
SB3
SC1
SC2
SC3
SD1
SD2
SD3
SE1
SE2
SE3
SF1
SF2
SF3
SG1
SG2
SG3
SH1
SH2
SH3
SJ1
SJ2
SJ3
SK1
SK2
SK3
SL1
SL2
SL3
SM1
SM2
SM3
SN1
SN2
SN3
SP1
SP2
SP3
SR1
SR2
SR3
ST1
ST2
ST3
SU1
SU2
SU3
SV1
SV2
SV3
SW1
SW2
SW3
SY1
SY2
SY3
TA1
TA2
TA3
TB1
TB2
TB3
TC1
TC2
TC3
TD1
TD2
TD3
TE1
TE2
TE3
TF1
TF2
TF3
TG1
TG2
TG3
TH1
TH2
TH3
TJ1
TJ2
TJ3
TK1
TK2
TK3
TL1
TL2
TL3
TM1
TM2
TM3
TN1
TN2
TN3
TP1
TP2
TP3
TR1
TR2
TR3
TT1
TT2
TT3
TU1
TU2
TU3
TV1
TV2
TV3
TW1
TW2
TW3
TY1
TY2
TY3
UA1
UA2
UA3
UB1
UB2
UB3
UC1
UC2
UC3
UD1
UD2
UD3
UE1
UE2
UE3
UF1
UF2
UF3
UG1
UG2
UG3
UH1
UH2
UH3
UJ1
UJ2
UJ3
UK1
UK2
UK3
UL1
UL2
UL3
UM1
UM2
UM3
UN1
UN2
UN3
UP1
UP2
UP3
UR1
UR2
UR3
UT1
UT2
UT3
UU1
UU2
UU3
UV1
UV2
UV3
UW1
UW2
UW3
UY1
UY2
UY3
VA1
VA2
VA3
VB1
VB2
VB3
VC1
VC2
VC3
VD1
VD2
VD3
VE1
VE2
VE3
VF1
VF2
VF3
VG1
VG2
VG3
VH1
VH2
VH3
VJ1
VJ2
VJ3
VK1
VK2
VK3
VL1
VL2
VL3
VM1
VM2
VM3
VN1
VN2
VN3
VP1
VP2
VP3
VR1
VR2
VR3
VT1
VT2
VT3
VU1
VU2
VU3
VV1
VV2
VV3
VW1
VW2
VW3
VY1
VY2
VY3
WA1
WA2
WA3
WB1
WB2
WB3
WC1
WC2
WC3
WD1
WD2
WD3
WE1
WE2
WE3
WF1
WF2
WF3
WG1
WG2
WG3
WH1
WH2
WH3
WJ1
WJ2
WJ3
WK1
WK2
WK3
WL1
WL2
WL3
WM1
WM2
WM3
WN1
WN2
WN3
WP1
WP2
WP3
WR1
WR2
WR3
WT1
WT2
WT3
WU1
WU2
WU3
WV1
WV2
WV3
WW1
WW2
WW3
WY1
WY2
WY3
YA1
YA2
YA3
YB1
YB2
YB3
YC1
YC2
YC3
YD1
YD2
YD3
YE1
YE2
YE3
YF1
YF2
YF3
YG1
YG2
YG3
YH1
YH2
YH3
YJ1
YJ2
YJ3
YK1
YK2
YK3
YL1
YL2
YL3
YM1
YM2
YM3
YN1
YN2
YN3
YP1
YP2
YP3
YR1
YR2
YR3
YT1
YT2
YT3
YU1
YU2
YU3
YV1
YV2
YV3
YW1
YW2
YW3
YY1
YY2
YY3
AA1
AA2
AA3
AB1
AB2
AB3
AC1
AC2
AC3
AD1
AD2
AD3
AE1
AE2
AE3
AF1
AF2
AF3
AG1
AG2
AG3
AH1
AH2
AH3
AJ1
AJ2
AJ3
AK1
AK2
AK3
AL1
AL2
AL3
AM1
AM2
AM3
AN1
AN2
AN3
AP1
AP2
AP3
AR1
AR2
AR3
AT1
AT2
AT3
AU1
AU2
AU3
AV1
AV2
AV3
AW1
AW2
AW3
AY1
AY2
AY3
BA1
BA2
BA3
BB1
BB2
BB3
BC1
BC2
BC3
BD1
BD2
BD3
BE1
BE2
BE3
BF1
BF2
BF3
BG1
BG2
BG3
BH1
BH2
BH3
BJ1
BJ2
BJ3
BK1
BK2
BK3
BL1
BL2
BL3
BM1
BM2
BM3
BN1
BN2
BN3
BP1
BP2
BP3
BR1
BR2
BR3
BT1
BT2
BT3
BU1
BU2
BU3
BV1
BV2
BV3
BW1
BW2
BW3
BY1
BY2
BY3
CA1
CA2
CA3
CB1
CB2
CB3
CC1
CC2
CC3
CD1
CD2
CD3
CE1
CE2
CE3
CF1
CF2
CF3
CG1
CG2
CG3
CH1
CH2
CH3
CJ1
CJ2
CJ3
CK1
CK2
CK3
CL1
CL2
CL3
CM1
CM2
CM3
CN1
CN2
CN3
CP1
CP2
CP3
CR1
CR2
CR3
CT1
CT2
CT3
CU1
CU2
CU3
CV1
CV2
CV3
CW1
CW2
CW3
CY1
CY2
CY3
DA1
DA2
DA3
DB1
DB2
DB3
DC1
DC2
DC3
DD1
DD2
DD3
DE1
DE2
DE3
DF1
DF2
DF3
DG1
DG2
DG3
DH1
DH2
DH3
DJ1
DJ2
DJ3
DK1
DK2
DK3
DL1
DL2
DL3
DM1
DM2
DM3
DN1
DN2
DN3
DP1
DP2
DP3
DR1
DR2
DR3
DT1
DT2
DT3
DU1
DU2
DU3
DV1
DV2
DV3
DW1
DW2
DW3
DY1
DY2
DY3
EA1
EA2
EA3
EB1
EB2
EB3
EC1
EC2
EC3
ED1
ED2
ED3
EE1
EE2
EE3
EF1
EF2
EF3
EG1
EG2
EG3
EH1
EH2
EH3
EJ1
EJ2
EJ3
EK1
EK2
EK3
EL1
EL2
EL3
EM1
EM2
EM3
EN1
EN2
EN3
EP1
EP2
EP3
ER1
ER2
ER3
ET1
ET2
ET3
EU1
EU2
EU3
EV1
EV2
EV3
EW1
EW2
EW3
EY1
EY2
EY3
FA1
FA2
FA3
FB1
FB2
FB3
FC1
FC2
FC3
FD1
FD2
FD3
FE1
FE2
FE3
FF1
FF2
FF3
FG1
FG2
FG3
FH1
FH2
FH3
FJ1
FJ2
FJ3
FK1
FK2
FK3
FL1
FL2
FL3
FM1
FM2
FM3
FN1
FN2
FN3
FP1
FP2
FP3
FR1
FR2
FR3
FT1
FT2
FT3
FU1
FU2
FU3
FV1
FV2
FV3
FW1
FW2
FW3
FY1
FY2
FY3
GA1
GA2
GA3
GB1
GB2
GB3
GC1
GC2
GC3
GD1
GD2
GD3
GE1
GE2
GE3
GF1
GF2
GF3
GG1
GG2
GG3
GH1
GH2
GH3
GJ1
GJ2
GJ3
GK1
GK2
GK3
GL1
GL2
GL3
GM1
GM2
GM3
GN1
GN2
GN3
GP1
GP2
GP3
GR1
GR2
GR3
GT1
GT2
GT3
GU1
GU2
GU3
GV1
GV2
GV3
GW1
GW2
GW3
GY1
GY2
GY3
HA1
HA2
HA3
HB1
HB2
HB3
HC1
HC2
HC3
HD1
HD2
HD3
HE1
HE2
HE3
HF1
HF2
HF3
HG1
HG2
HG3
HH1
HH2
HH3
HJ1
HJ2
HJ3
HK1
HK2
HK3
HL1
HL2
HL3
HM1
HM2
HM3
HN1
HN2
HN3
HP1
HP2
HP3
HR1
HR2
HR3
HT1
HT2
HT3
HU1
HU2
HU3
HV1
HV2
HV3
HW1
HW2
HW3
HY1
HY2
HY3
JA1
JA2
JA3
JB1
JB2
JB3
JC1
JC2
JC3
JD1
JD2
JD3
JE1
JE2
JE3
JF1
JF2
JF3
JG1
JG2
JG3
JH1
JH2
JH3
JJ1
JJ2
JJ3
JK1
JK2
JK3
JL1
JL2
JL3
JM1
JM2
JM3
JN1
JN2
JN3
JP1
JP2
JP3
JR1
JR2
JR3
JT1
JT2
JT3
JU1
JU2
JU3
JV1
JV2
JV3
JW1
JW2
JW3
JY1
JY2
JY3
KA1
KA2
KA3
KB1
KB2
KB3
KC1
KC2
KC3
KD1
KD2
KD3
KE1
KE2
KE3
KF1
KF2
KF3
KG1
KG2
KG3
KH1
KH2
KH3
KJ1
KJ2
KJ3
KK1
KK2
KK3
KL1
KL2
KL3
KM1
KM2
KM3
KN1
KN2
KN3
KP1
KP2
KP3
KR1
KR2
KR3
KT1
KT2
KT3
KU1
KU2
KU3
KV1
KV2
KV3
KW1
KW2
KW3
KY1
KY2
KY3
LA1
LA2
LA3
LB1
LB2
LB3
LC1
LC2
LC3
LD1
LD2
LD3
LE1
LE2
LE3
LF1
LF2
LF3
LG1
LG2
LG3
LH1
LH2
LH3
LJ1
LJ2
LJ3
LK1
LK2
LK3
LL1
LL2
LL3
LM1
LM2
LM3
LN1
LN2
LN3
LP1
LP2
LP3
LR1
LR2
LR3
LT1
LT2
LT3
LU1
LU2
LU3
LV1
LV2
LV3
LW1
LW2
LW3
LY1
LY2
LY3
MA1
MA2
MA3
MB1
MB2
MB3
MC1
MC2
MC3
MD1
MD2
MD3
ME1
ME2
ME3
MF1
MF2
MF3
MG1
MG2
MG3
MH1
MH2
MH3
MJ1
MJ2
MJ3
MK1
MK2
MK3
ML1
ML2
ML3
MM1
MM2
MM3
MN1
MN2
MN3
MP1
MP2
MP3
MR1
MR2
MR3
MT1
MT2
MT3
MU1
MU2
MU3
MV1
MV2
MV3
MW1
MW2
MW3
MY1
MY2
MY3
NA1
NA2
NA3
NB1
NB2
NB3
NC1
NC2
NC3
ND1
ND2
ND3
NE1
NE2
NE3
NF1
NF2
NF3
NG1
NG2
NG3
NH1
NH2
NH3
NJ1
NJ2
NJ3
NK1
NK2
NK3
NL1
NL2
NL3
NM1
NM2
NM3
NN1
NN2
NN3
NP1
NP2
NP3
NR1
NR2
NR3
NT1
NT2
NT3
NU1
NU2
NU3
NV1
NV2
NV3
NW1
NW2
NW3
NY1
NY2
NY3
PA1
PA2
PA3
PB1
PB2
PB3
PC1
PC2
PC3
PD1
PD2
PD3
PE1
PE2
PE3
PF1
PF2
PF3
PG1
PG2
PG3
PH1
PH2
PH3
PJ1
PJ2
PJ3
PK1
PK2
PK3
PL1
PL2
PL3
PM1
PM2
PM3
PN1
PN2
PN3
PP1
PP2
PP3
PR1
PR2
PR3
PT1
PT2
PT3
PU1
PU2
PU3
PV1
PV2
PV3
PW1
PW2
PW3
PY1
PY2
PY3
RA1
RA2
RA3
RB1
RB2
RB3
RC1
RC2
RC3

OUT-35A (22/45)
SUFFIX: -12

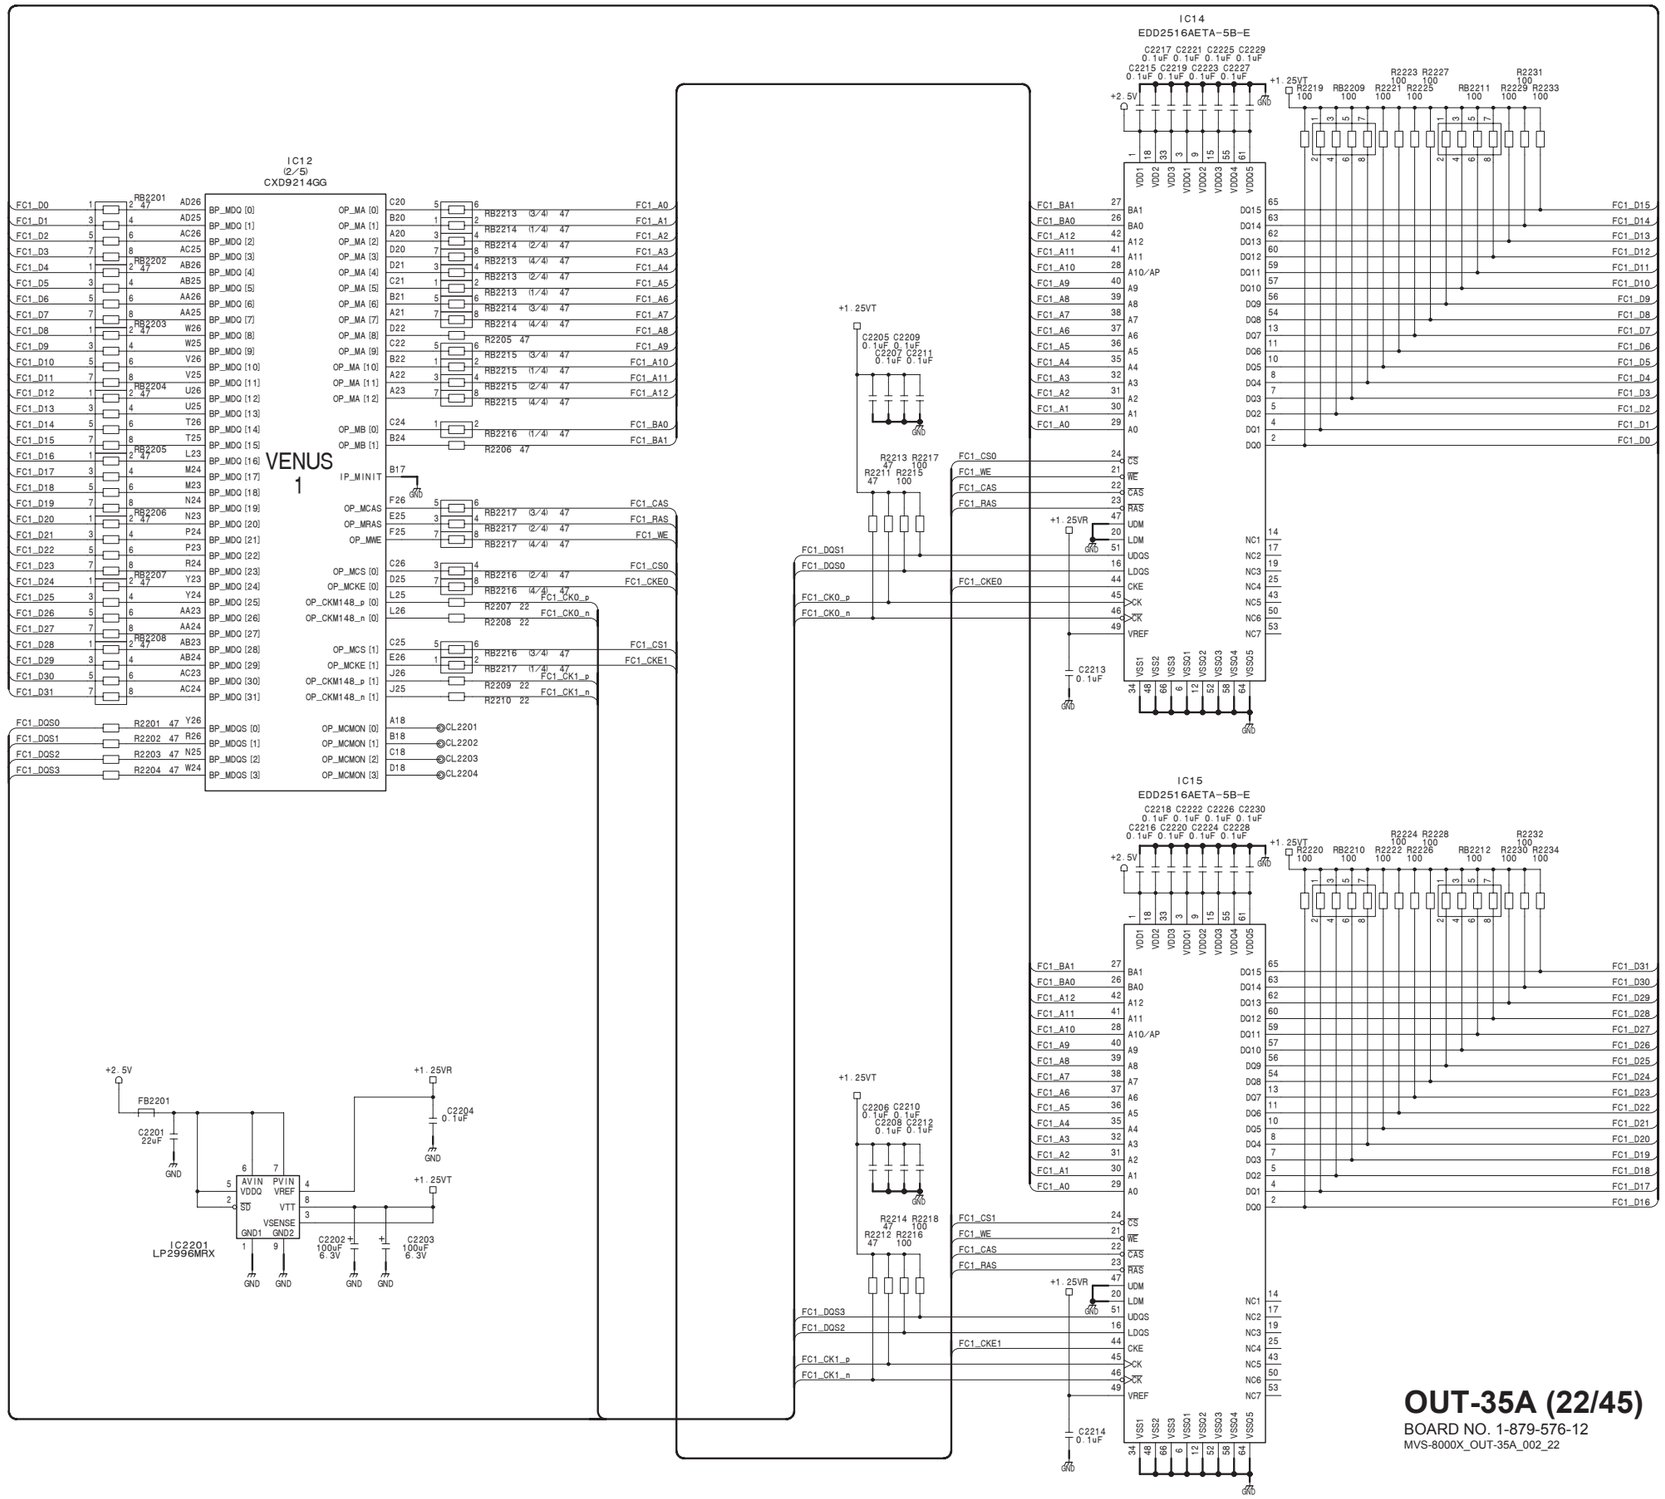

RIGHT

OUT-35A (22/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_22

OUT-35A (23/45)
SUFFIX: -12

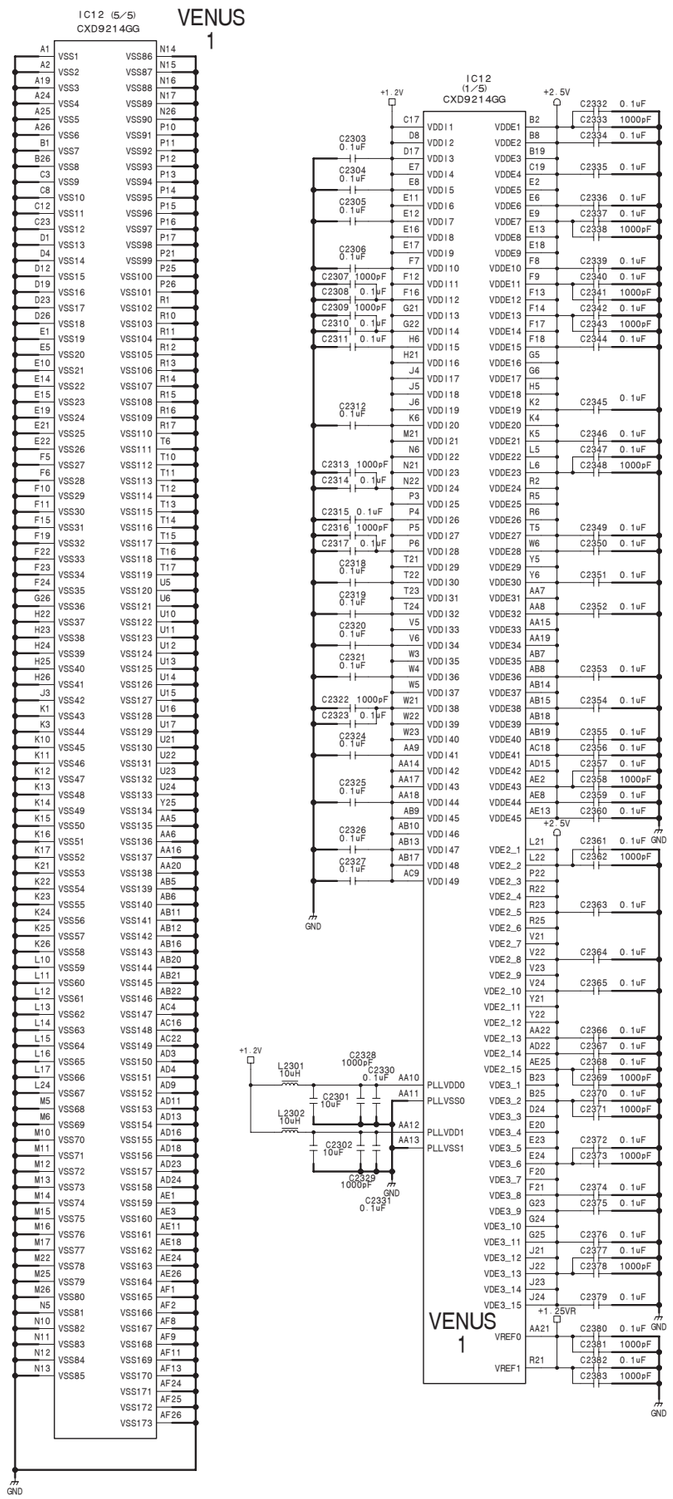

OUT-35A (23/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_23

OUT-35A (24/45)
SUFFIX: -12

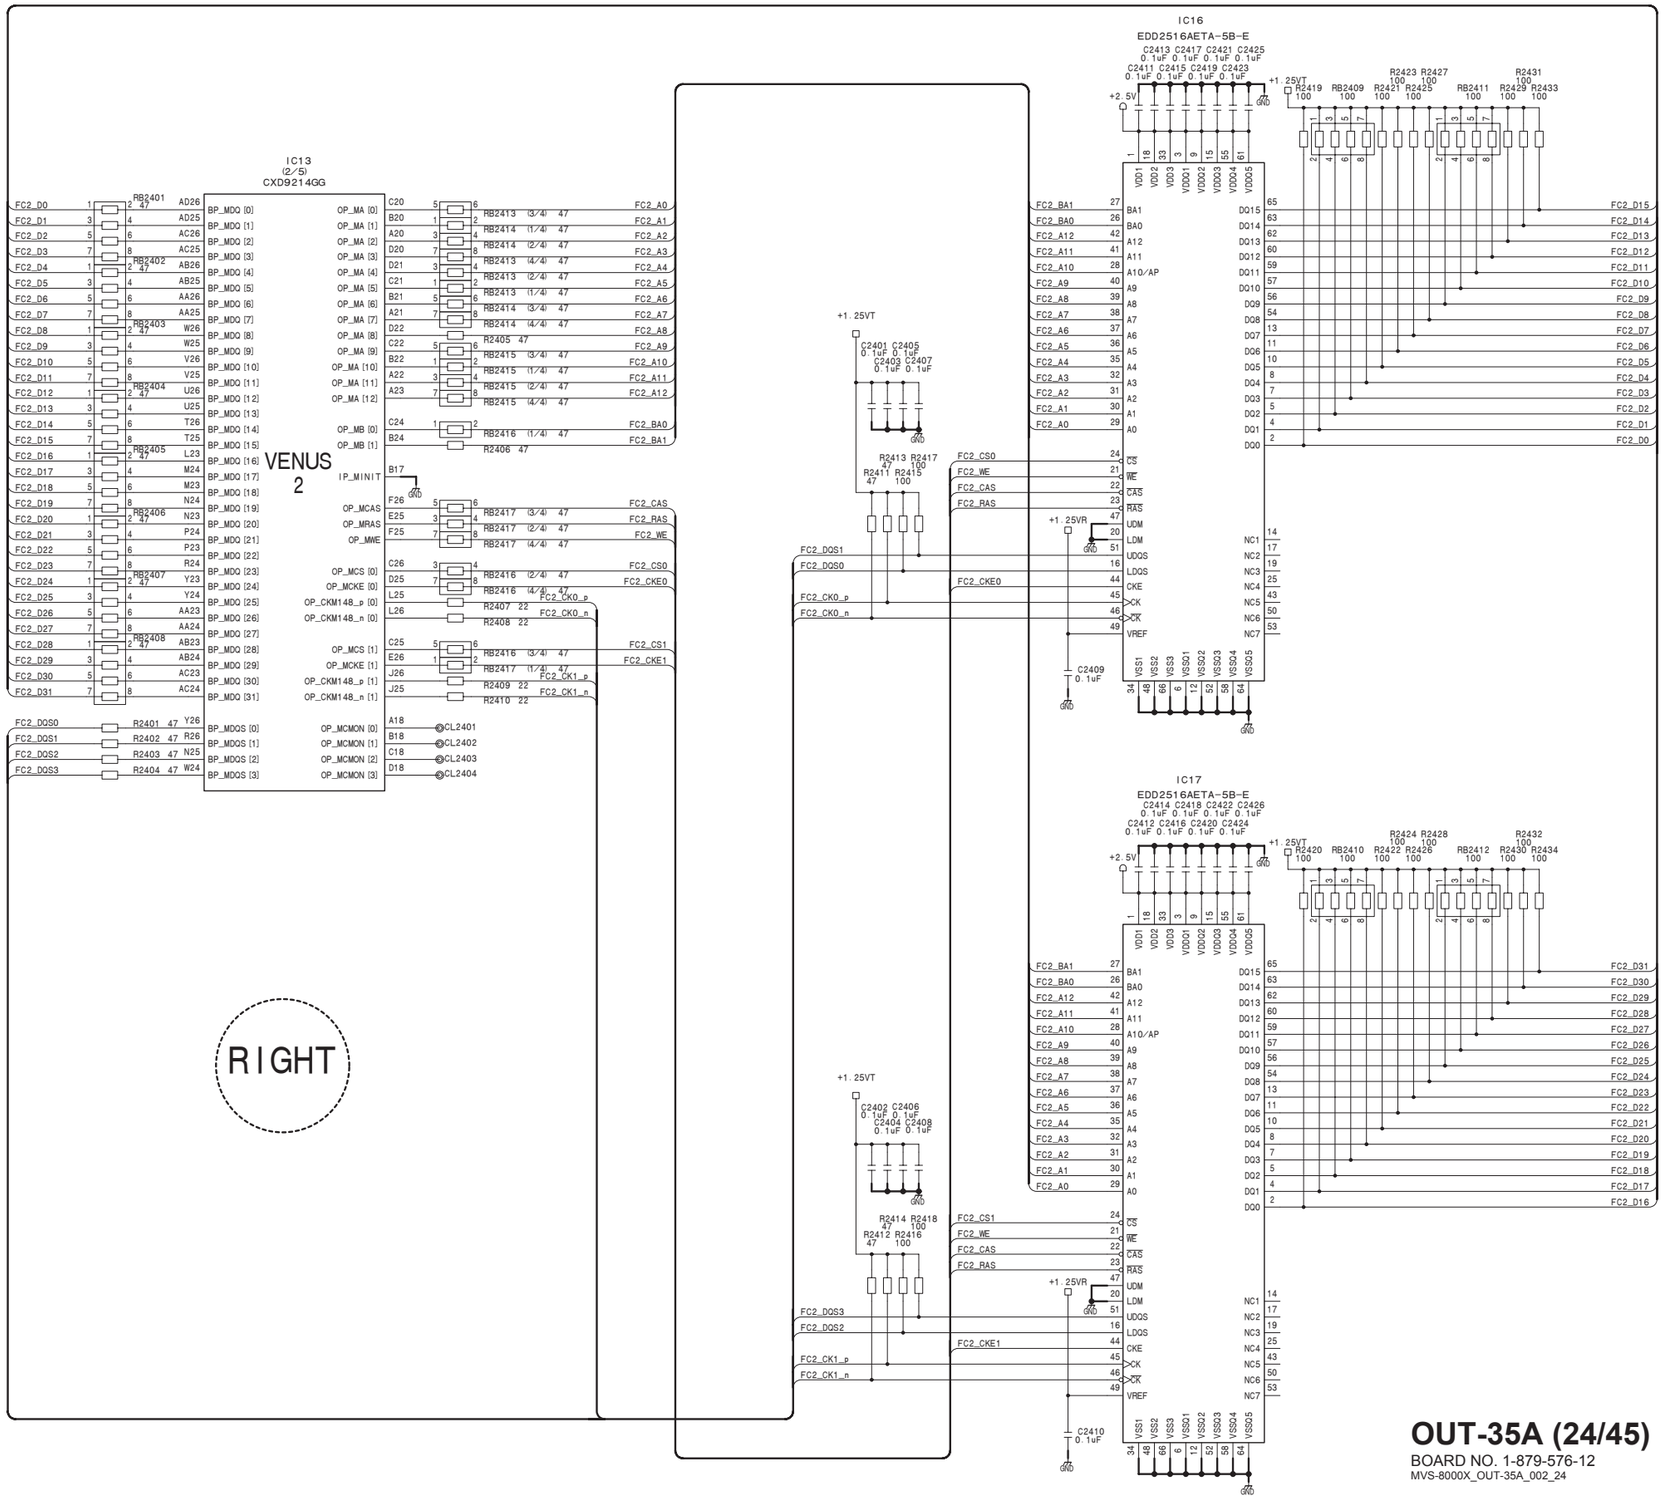

OUT-35A (24/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_24

OUT-35A (25/45)
SUFFIX: -12

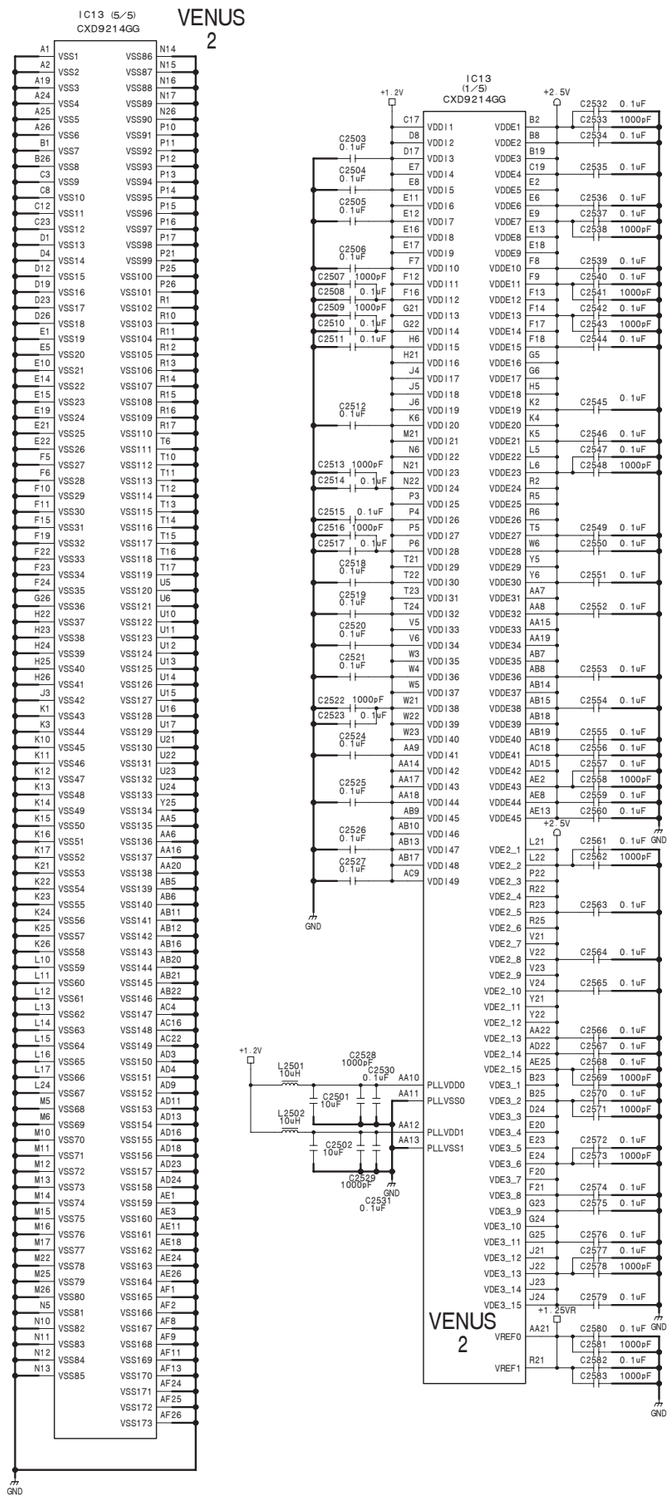

OUT-35A (26/45)
SUFFIX: -12

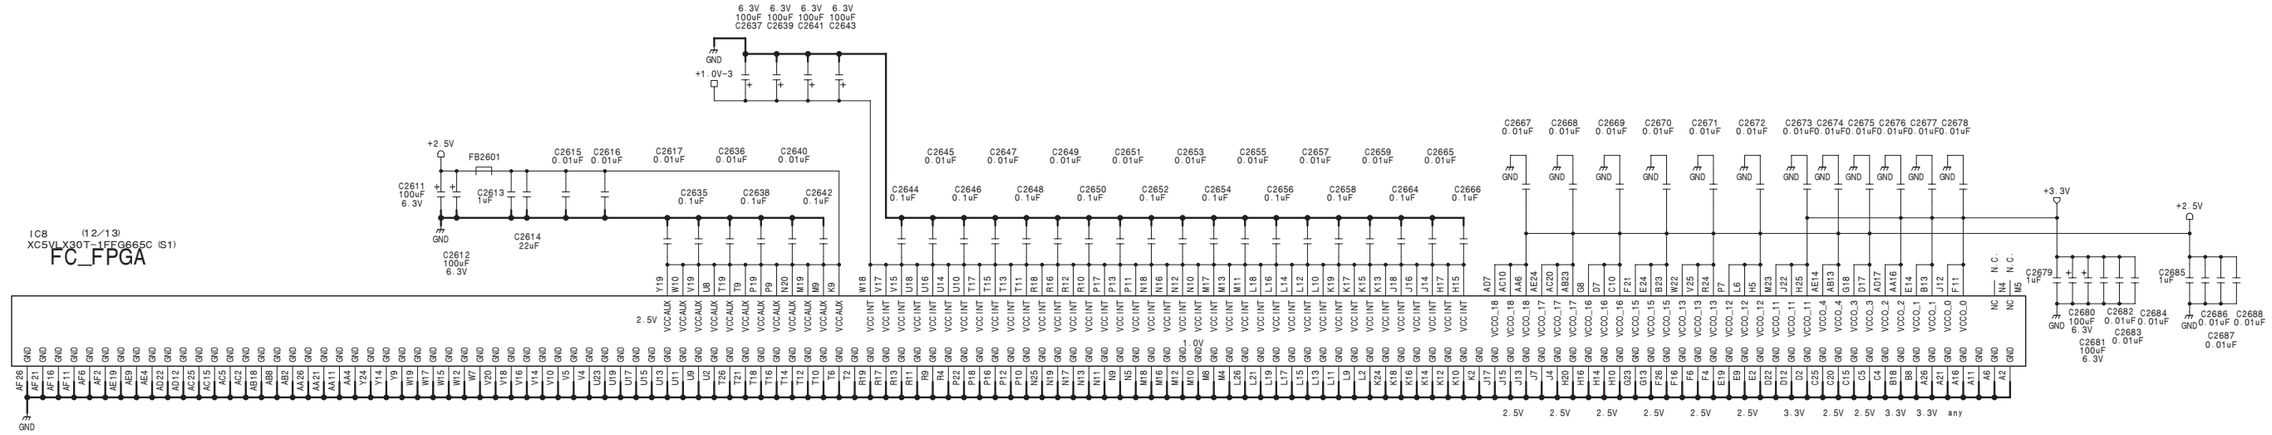

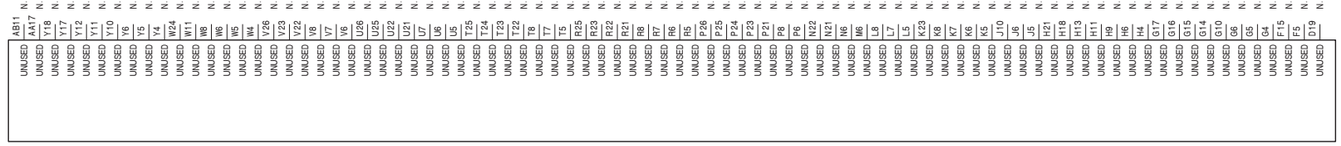

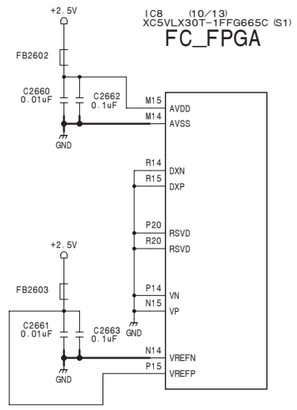

OUT-35A (26/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_26

OUT-35A (27/45)
SUFFIX: -12

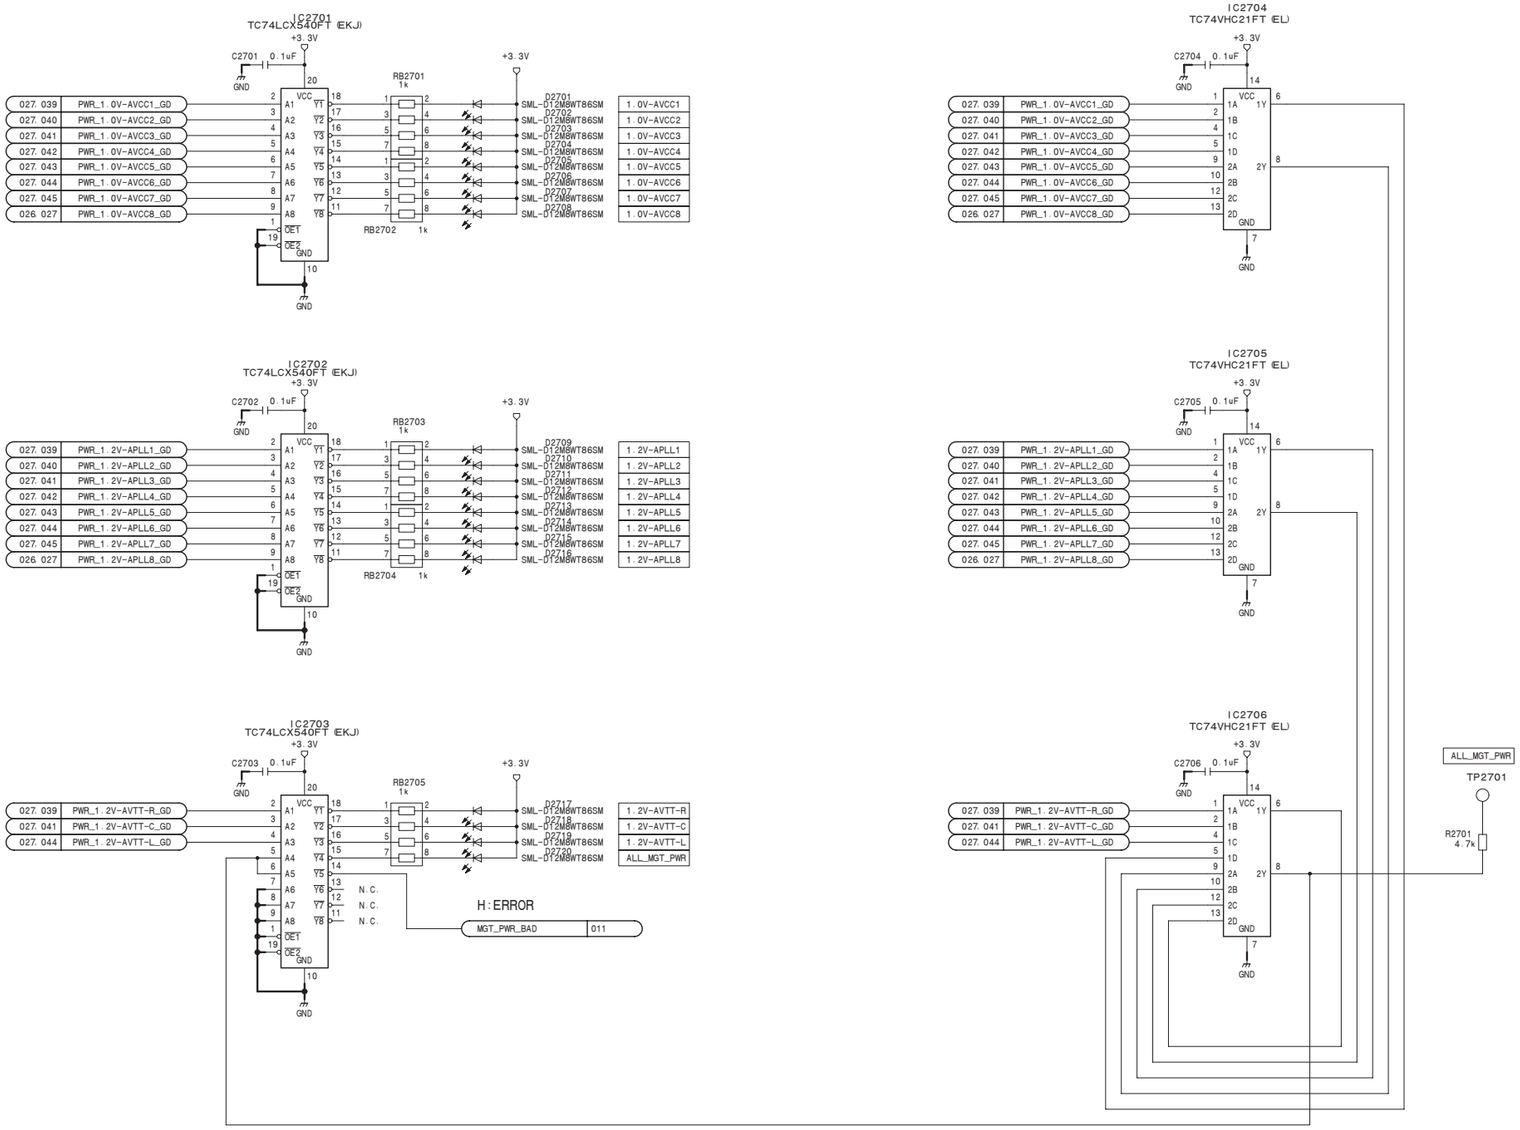

OUT-35A (27/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_27

OUT-35A (28/45)
SUFFIX: -12

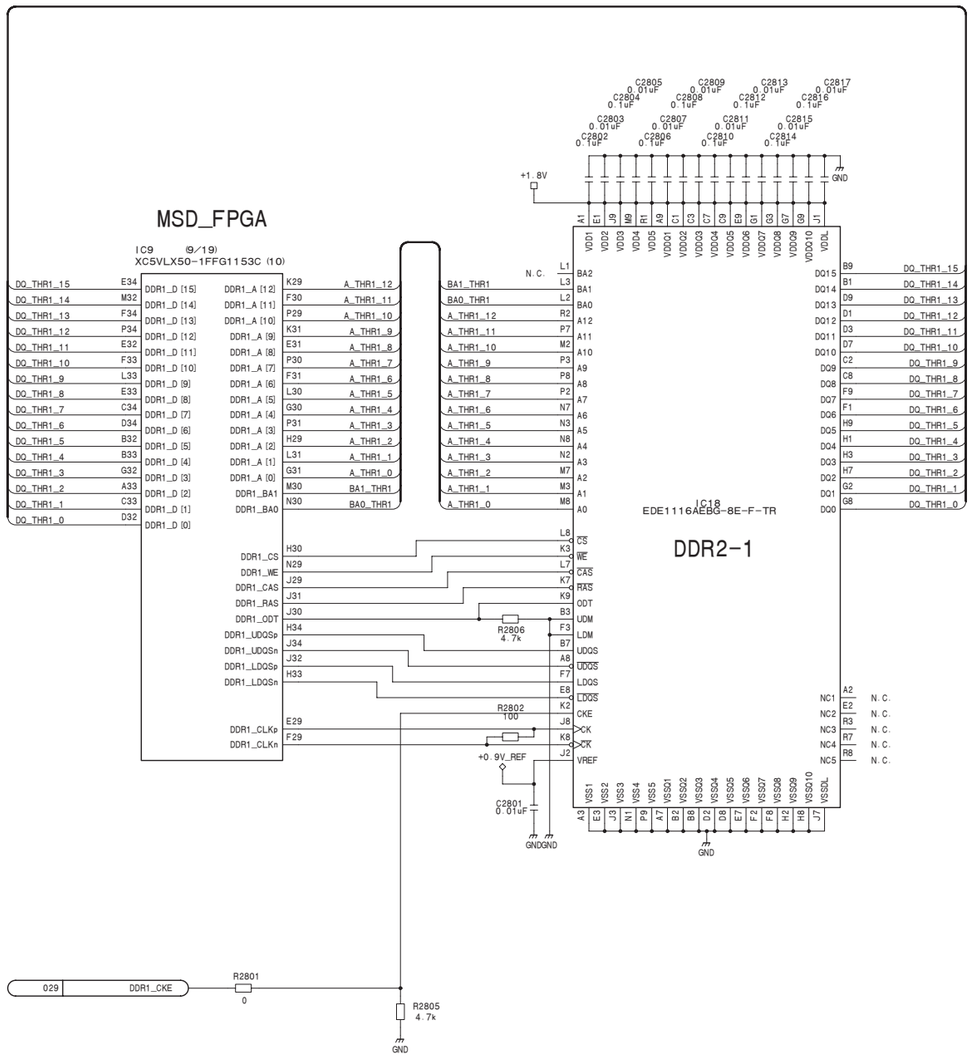

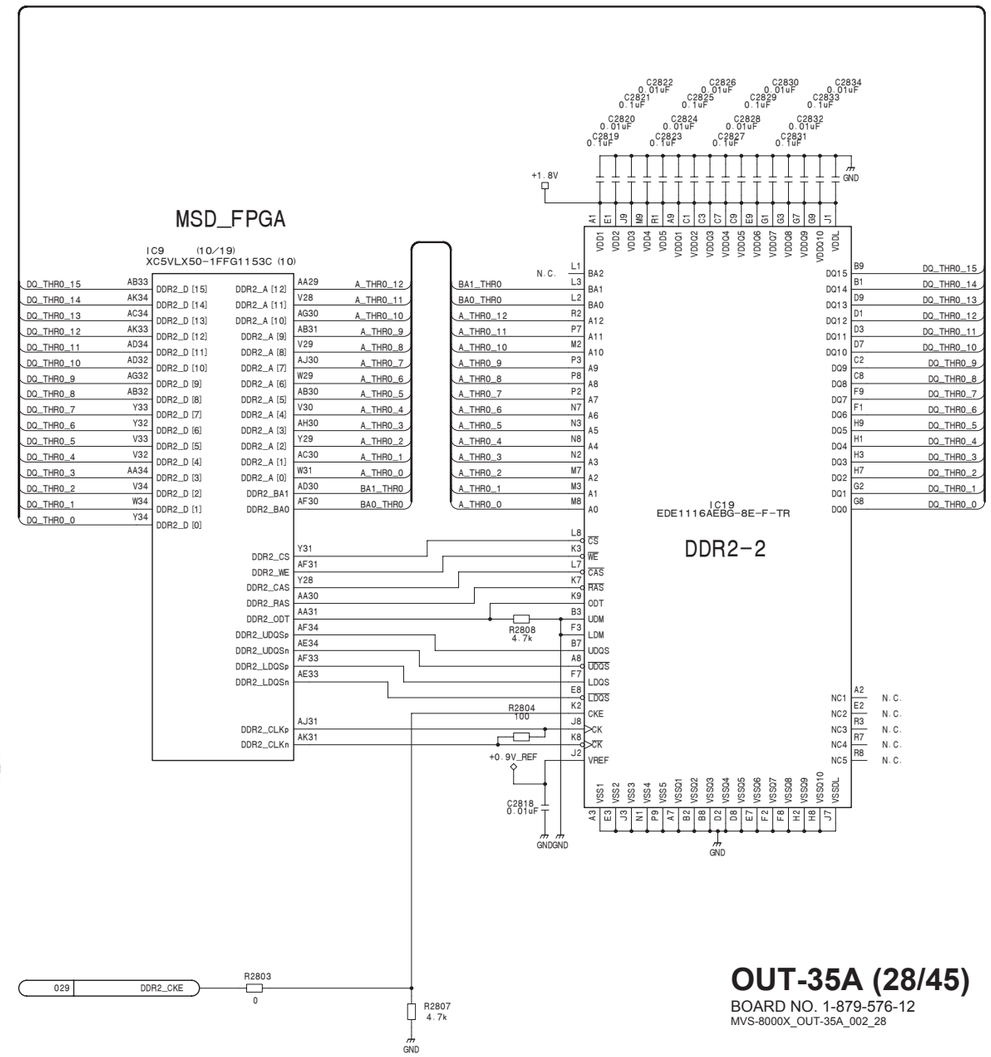

CENTER

OUT-35A (28/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_28

OUT-35A (29/45)
SUFFIX: -12

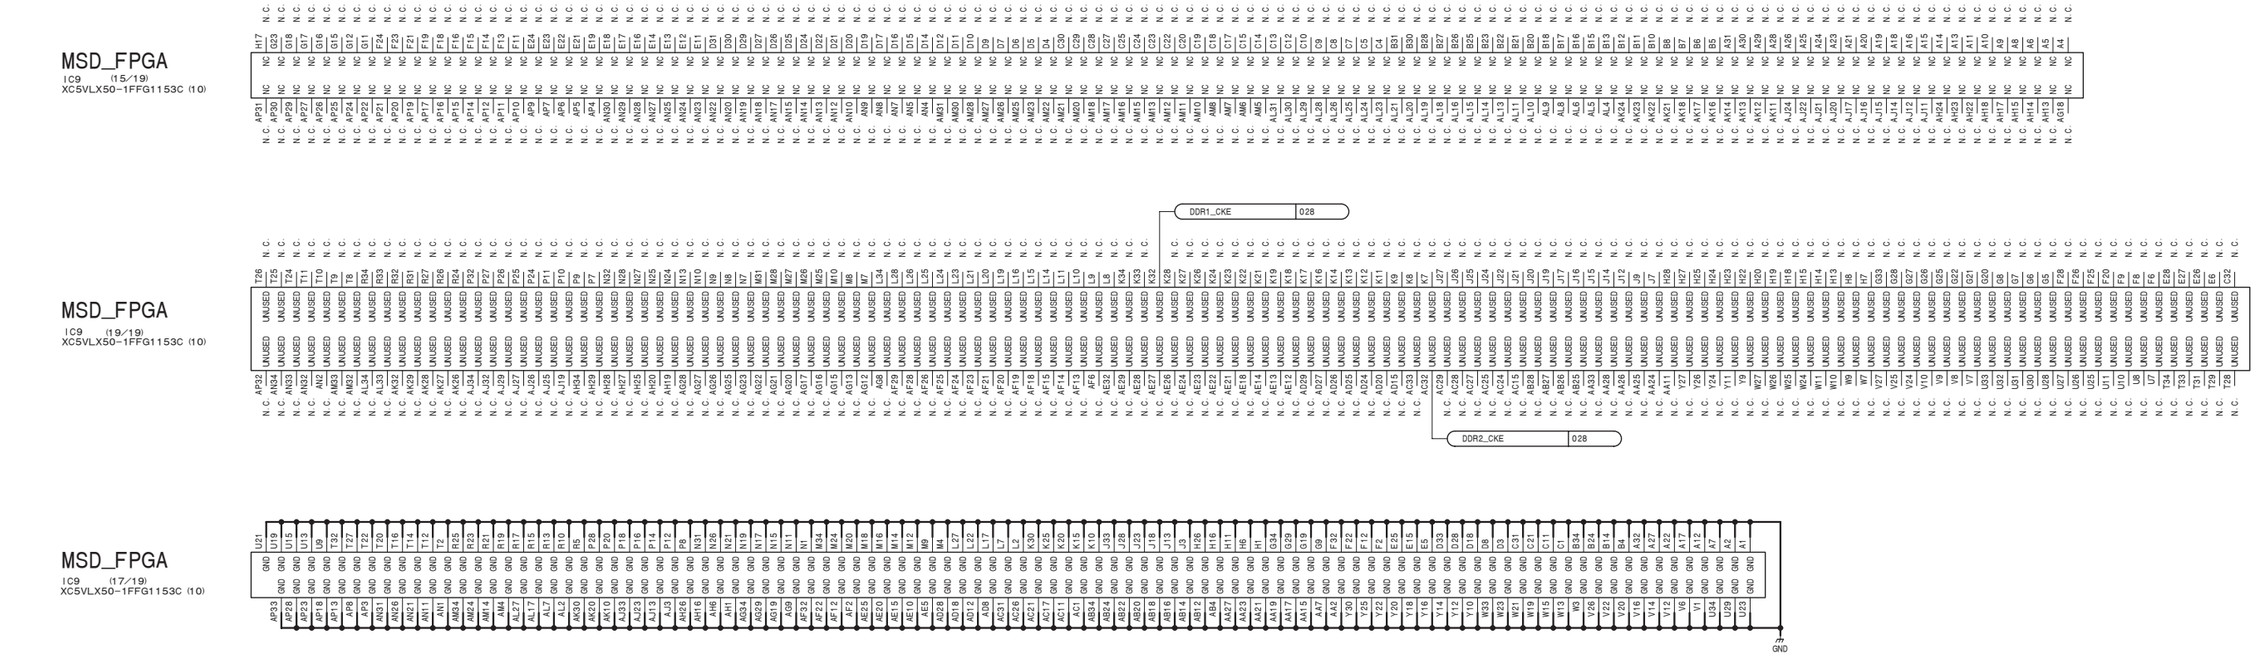

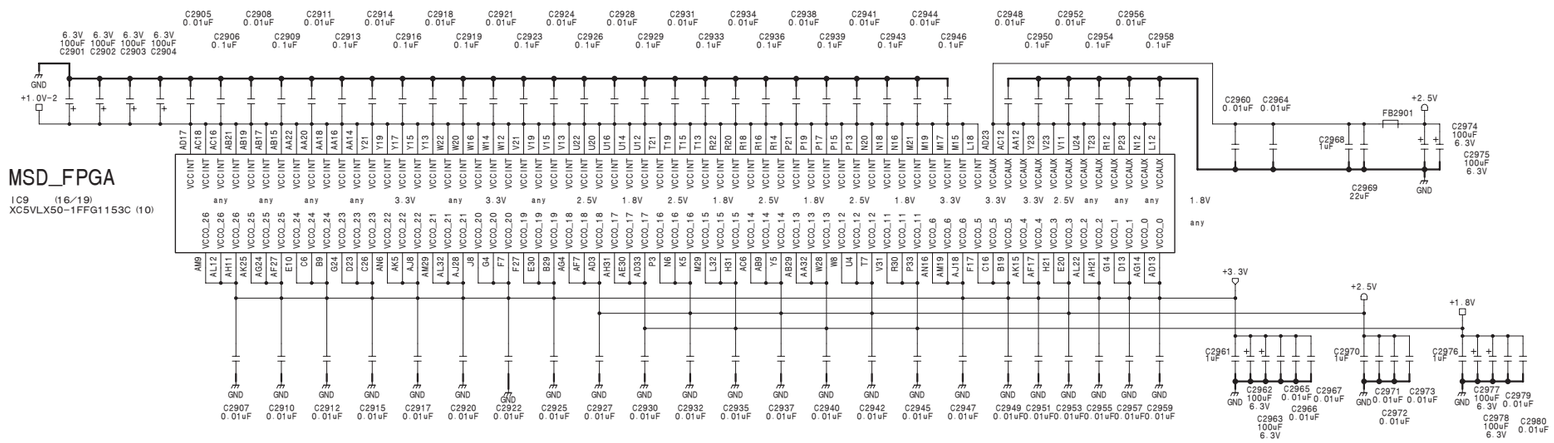

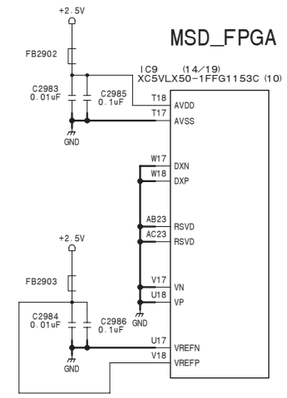

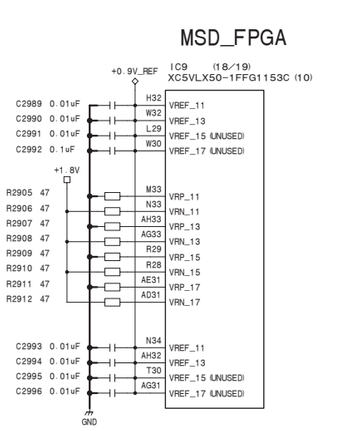

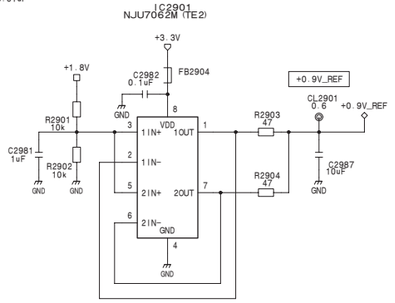



CENTER

OUT-35A (29/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_29

4-308

OUT-35A (30/45)
SUFFIX: -12

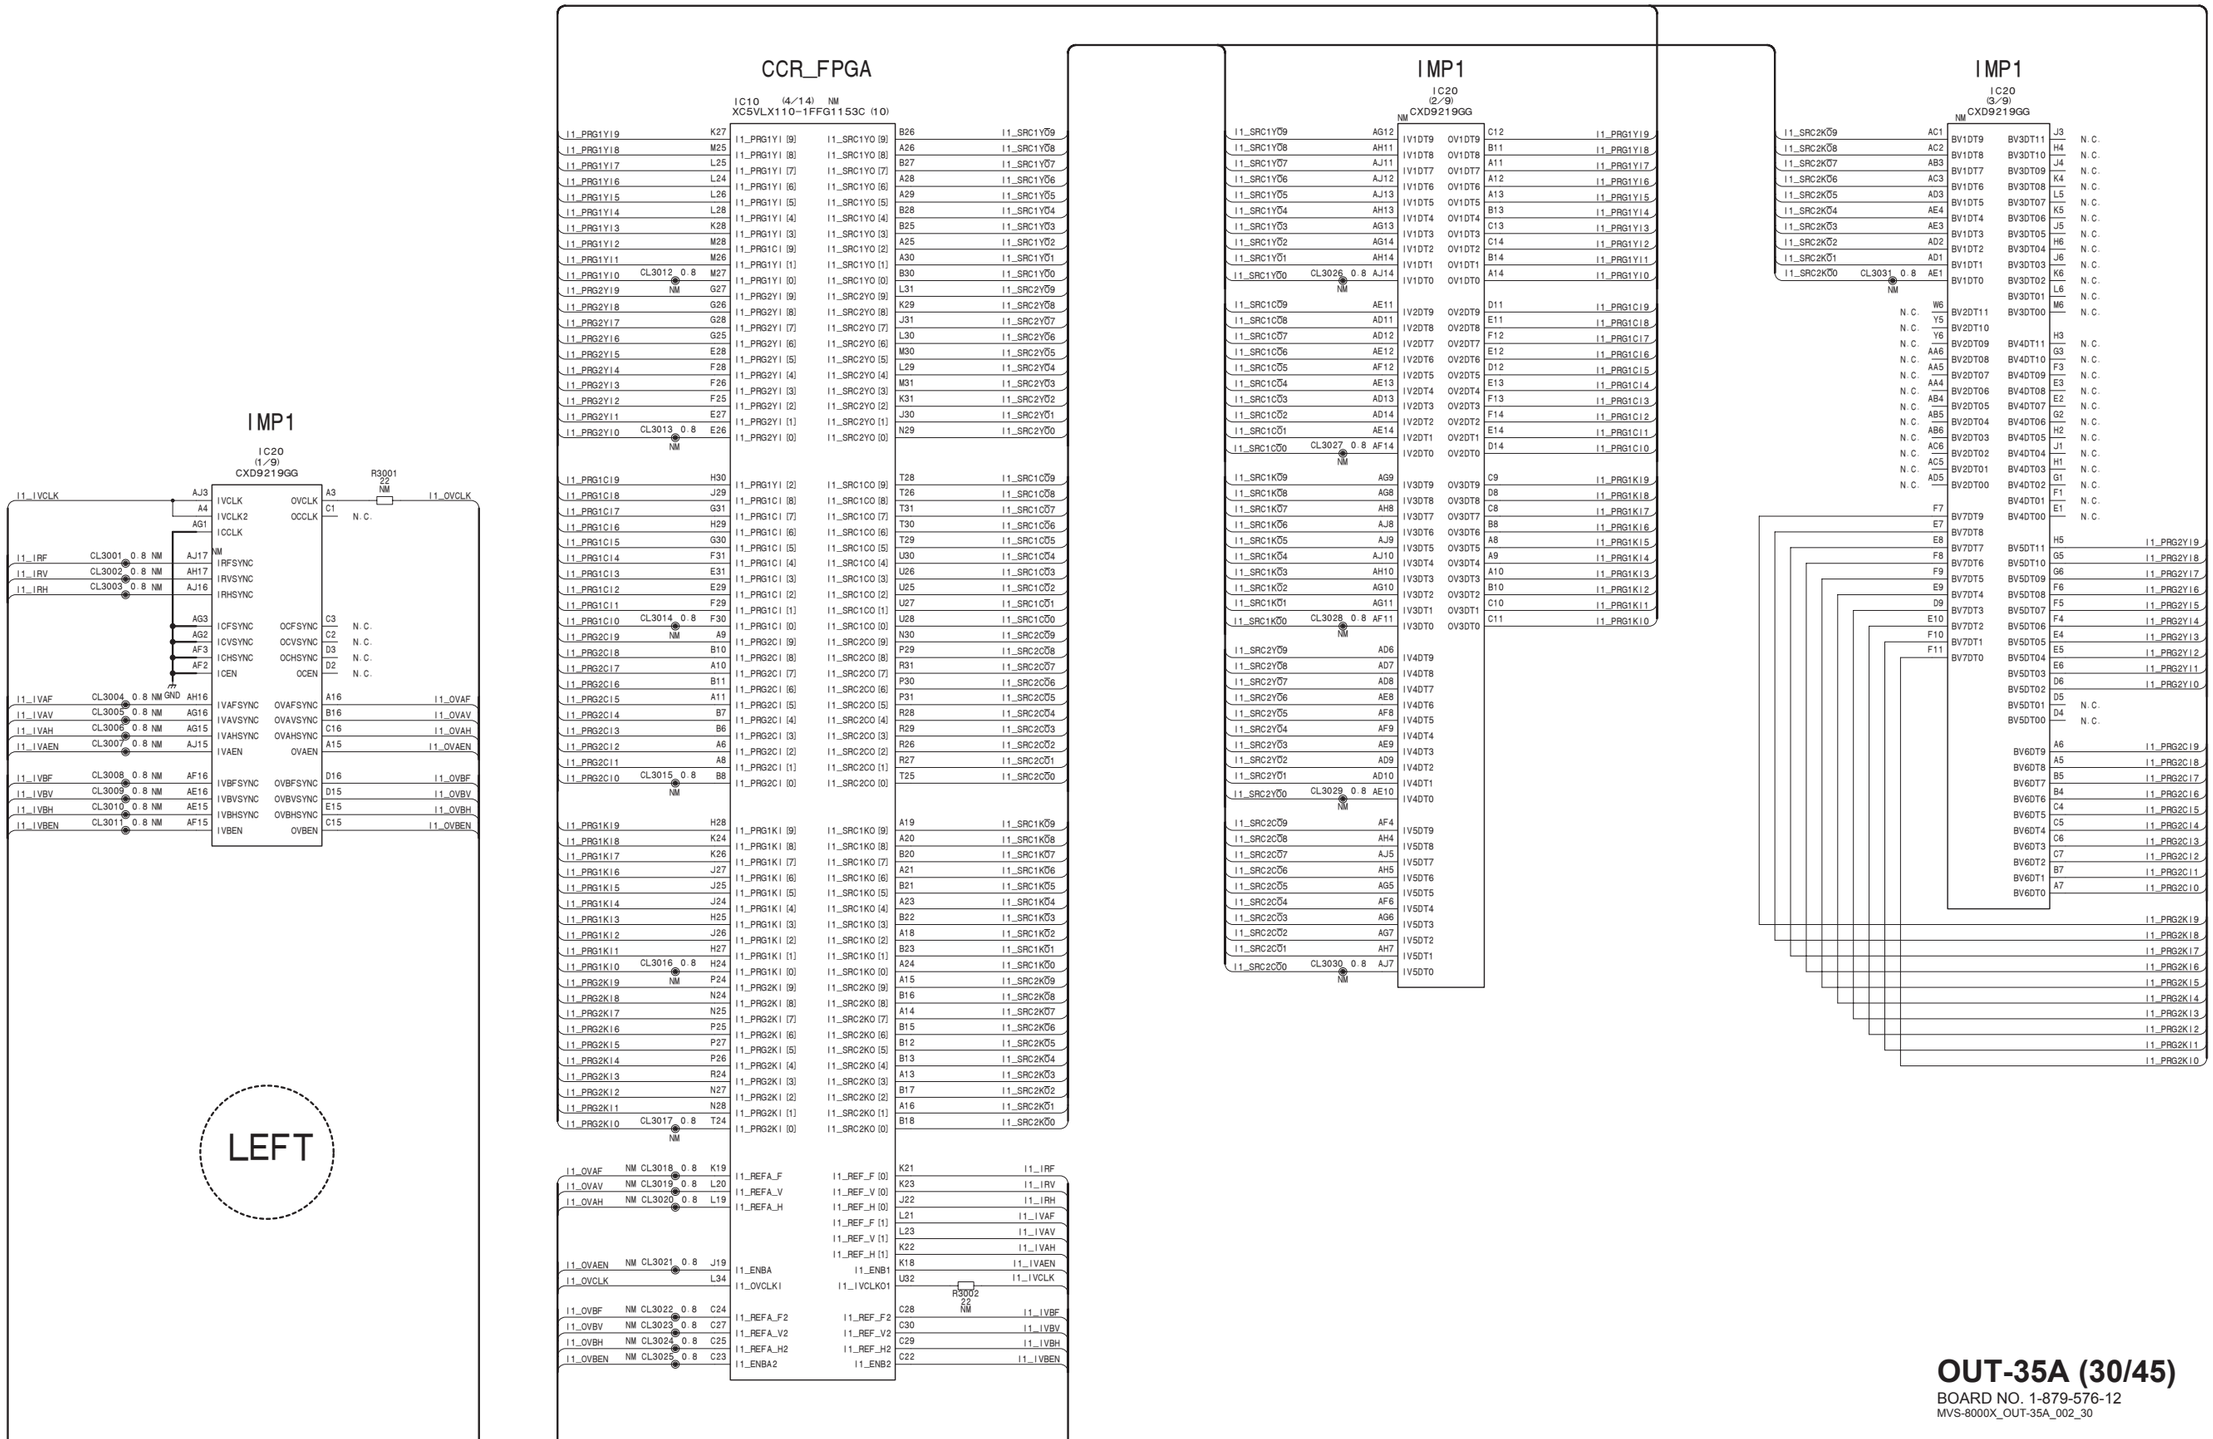

4-309

OUT-35A (30/45)

BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_30

OUT-35A (31/45)
SUFFIX: -12

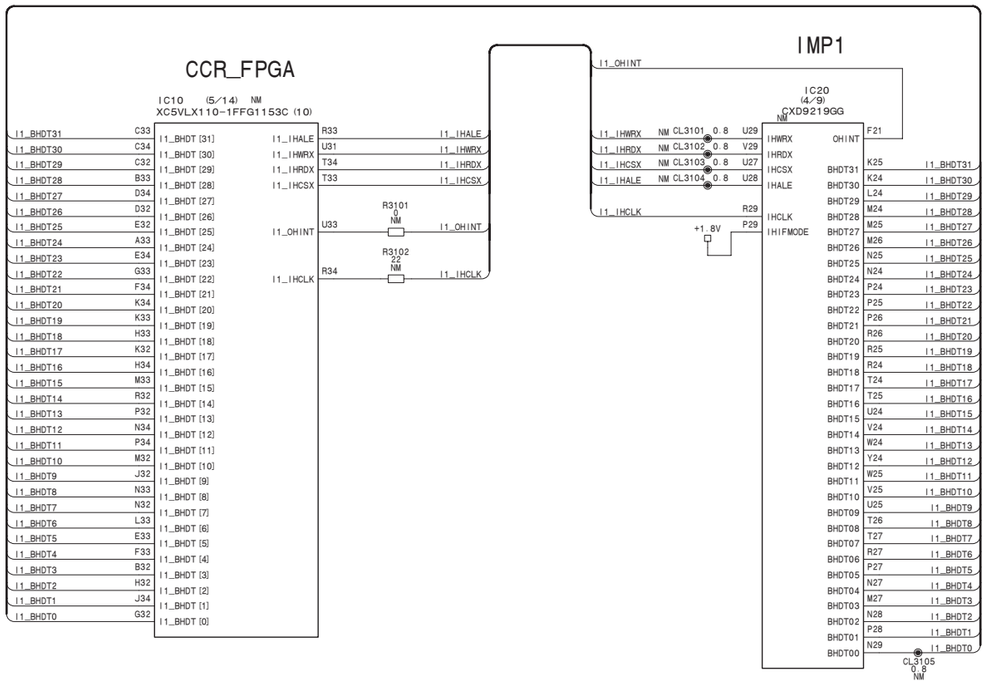

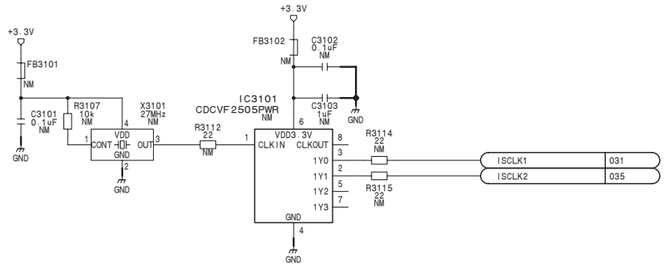

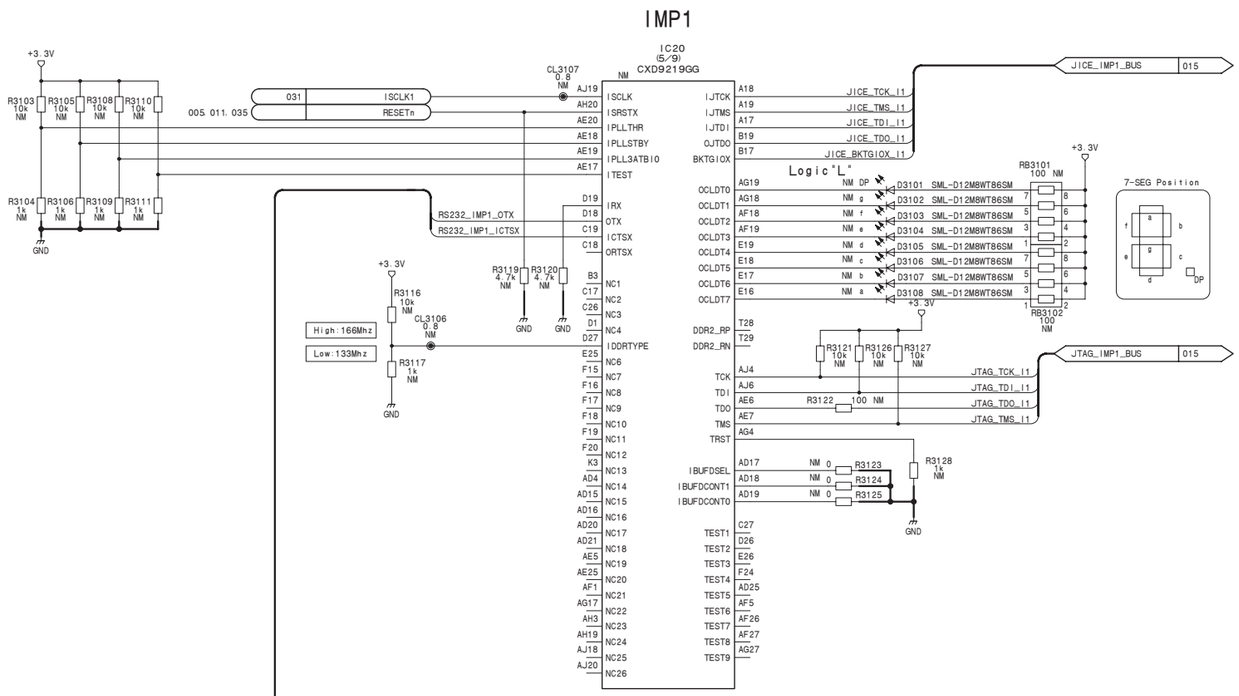

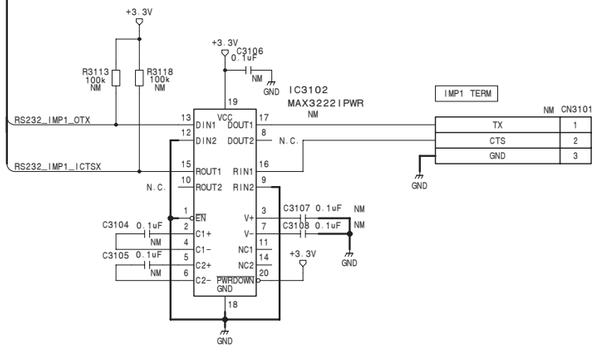

LEFT

OUT-35A (31/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_31

OUT-35A (32/45)

SUFFIX: -12

OUT-35A (32/45)

SUFFIX: -12

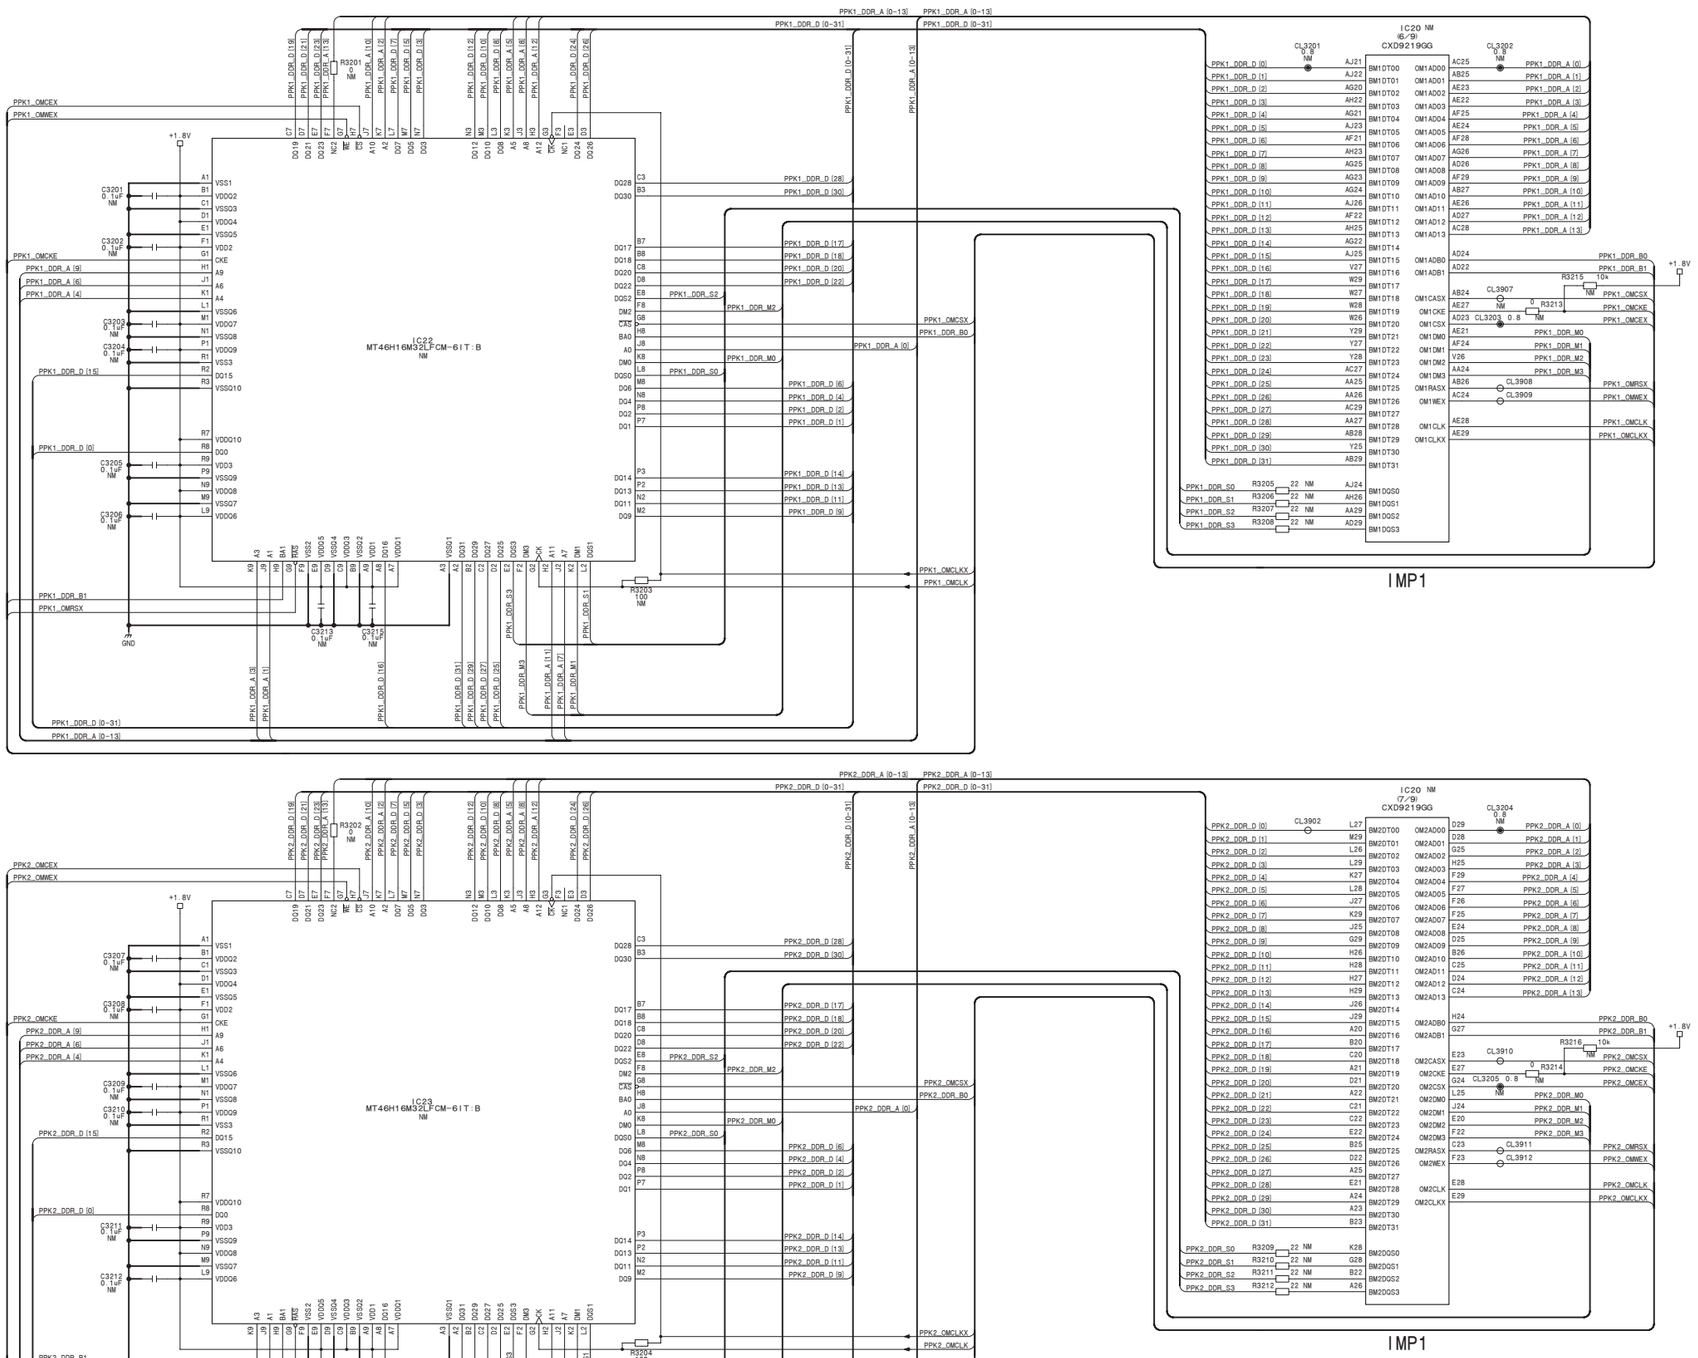

LEFT

OUT-35A (32/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_32

OUT-35A (33/45)
SUFFIX: -12

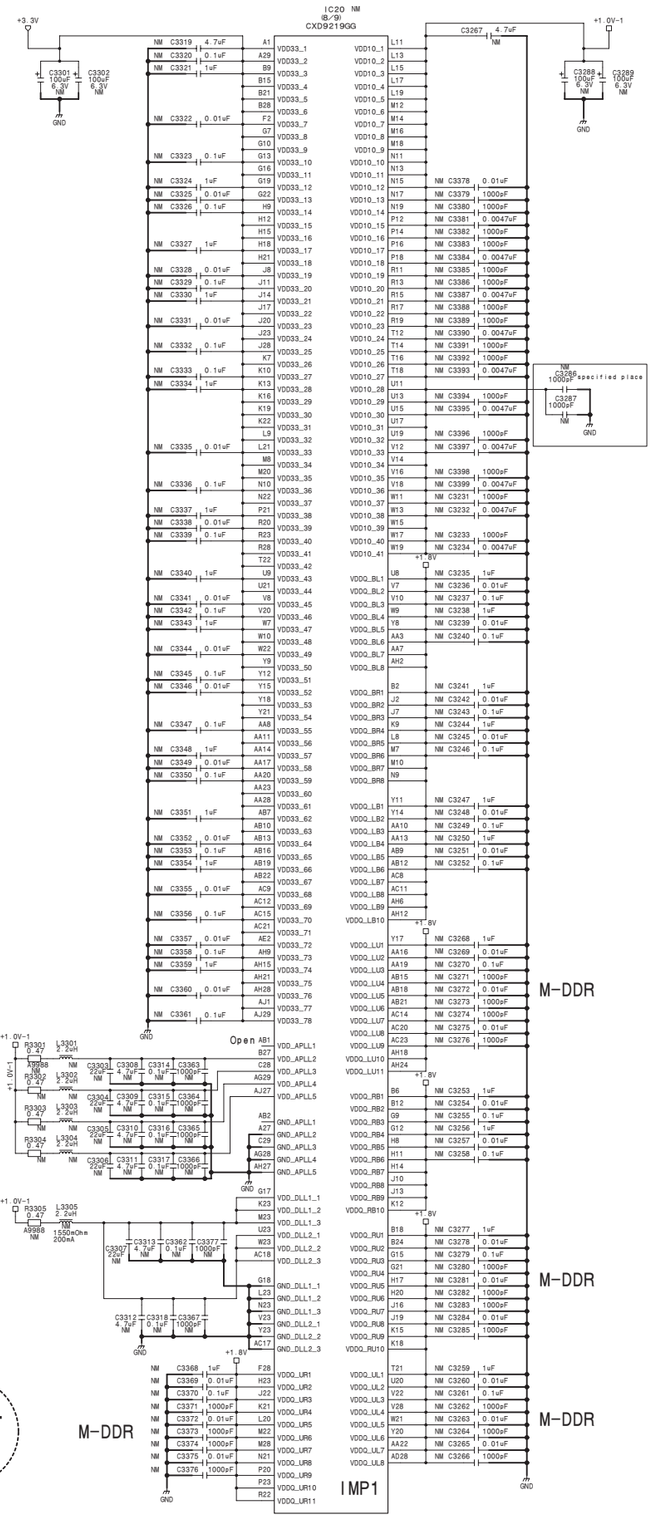

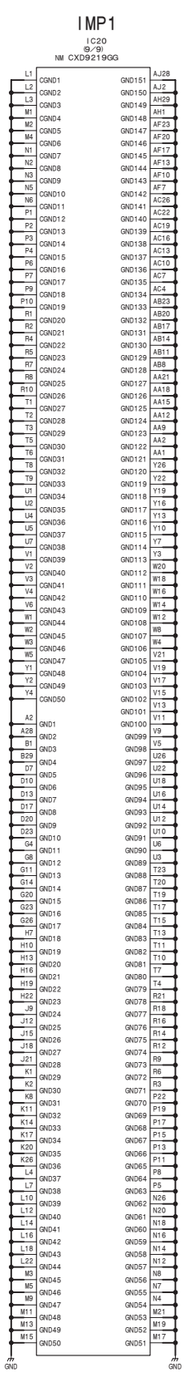

OUT-35A (33/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_33

OUT-35A (34/45)
SUFFIX: -12

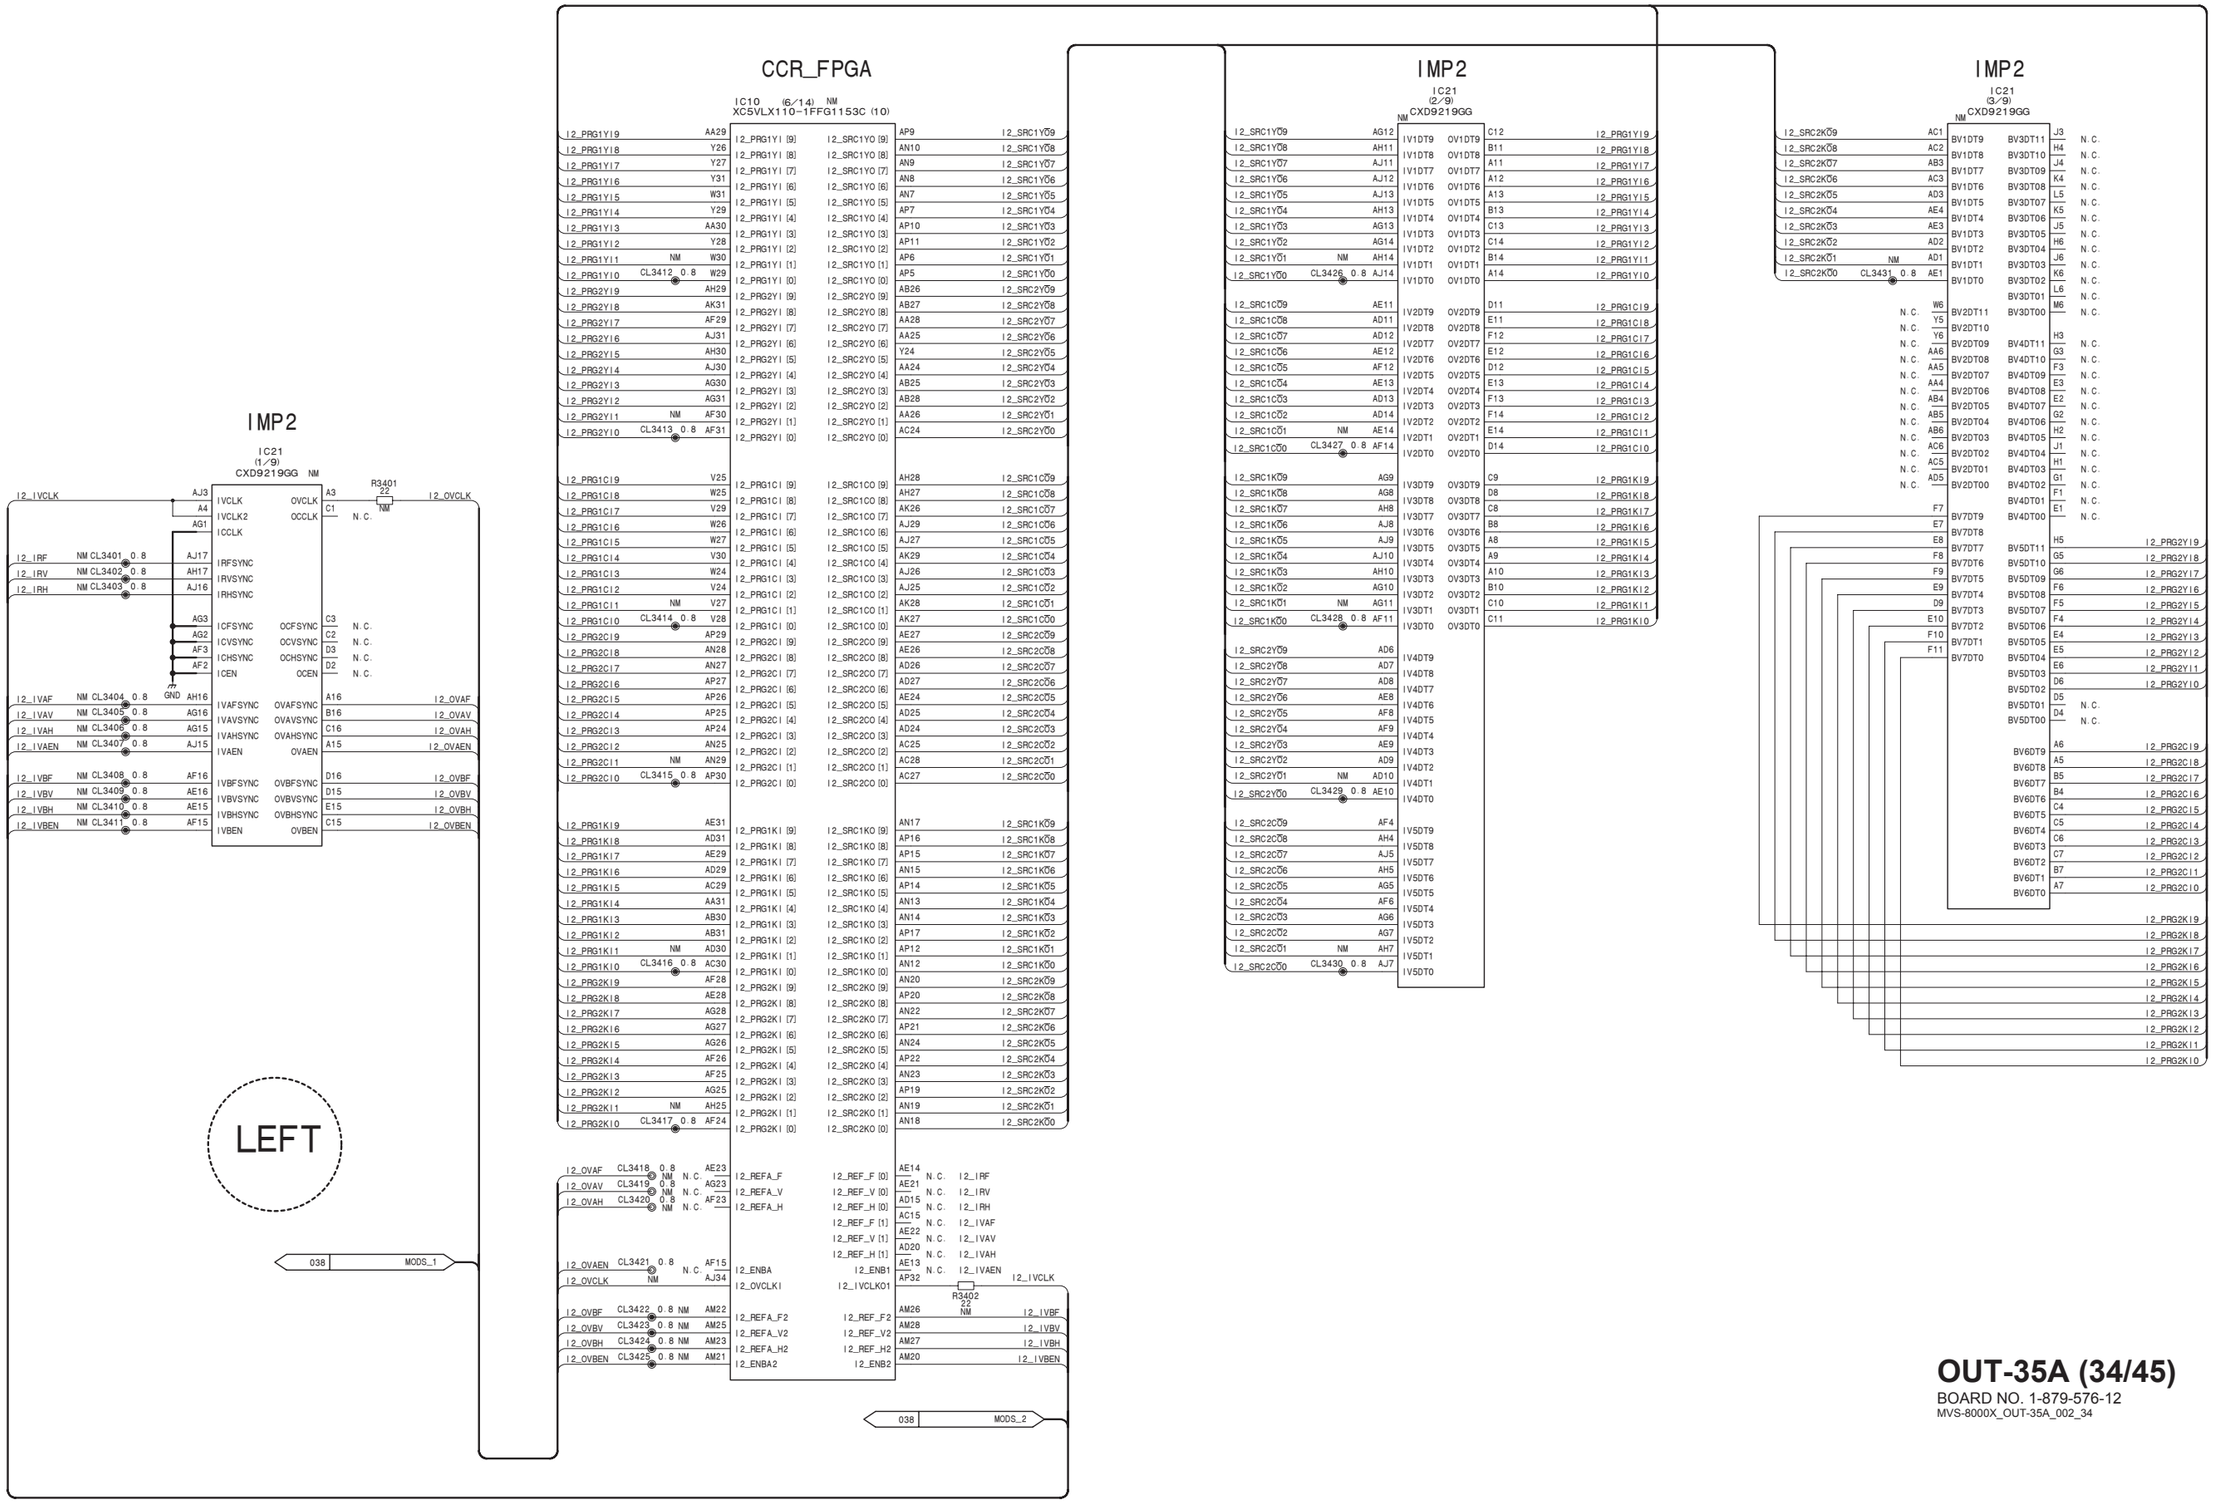

4-313

OUT-35A (34/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_34

OUT-35A (35/45)
SUFFIX: -12

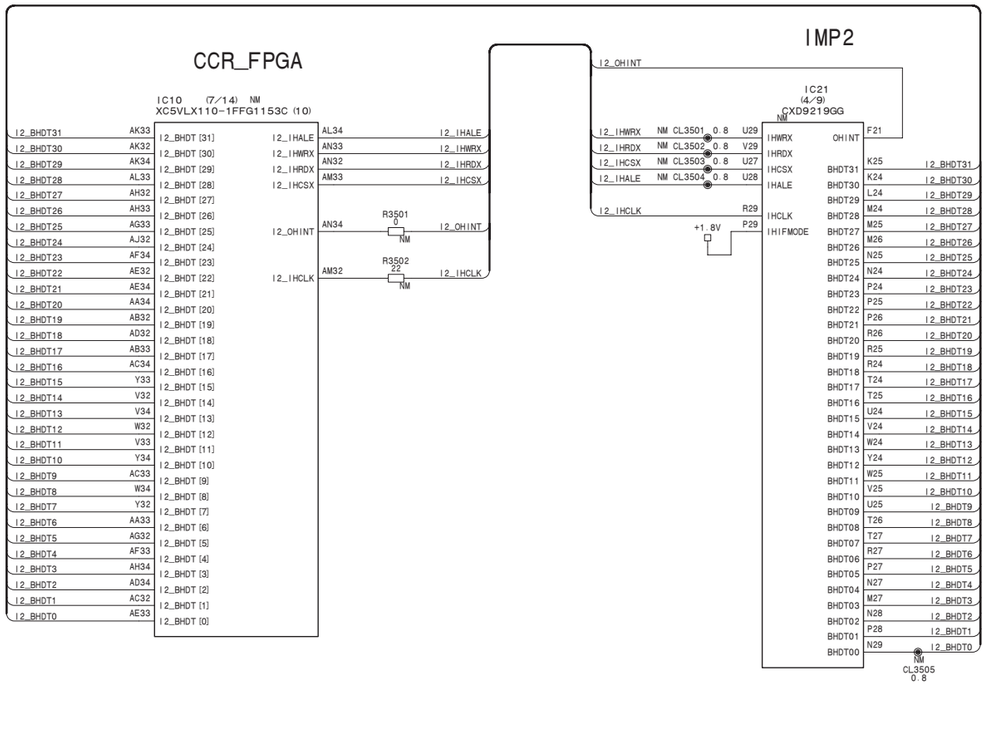

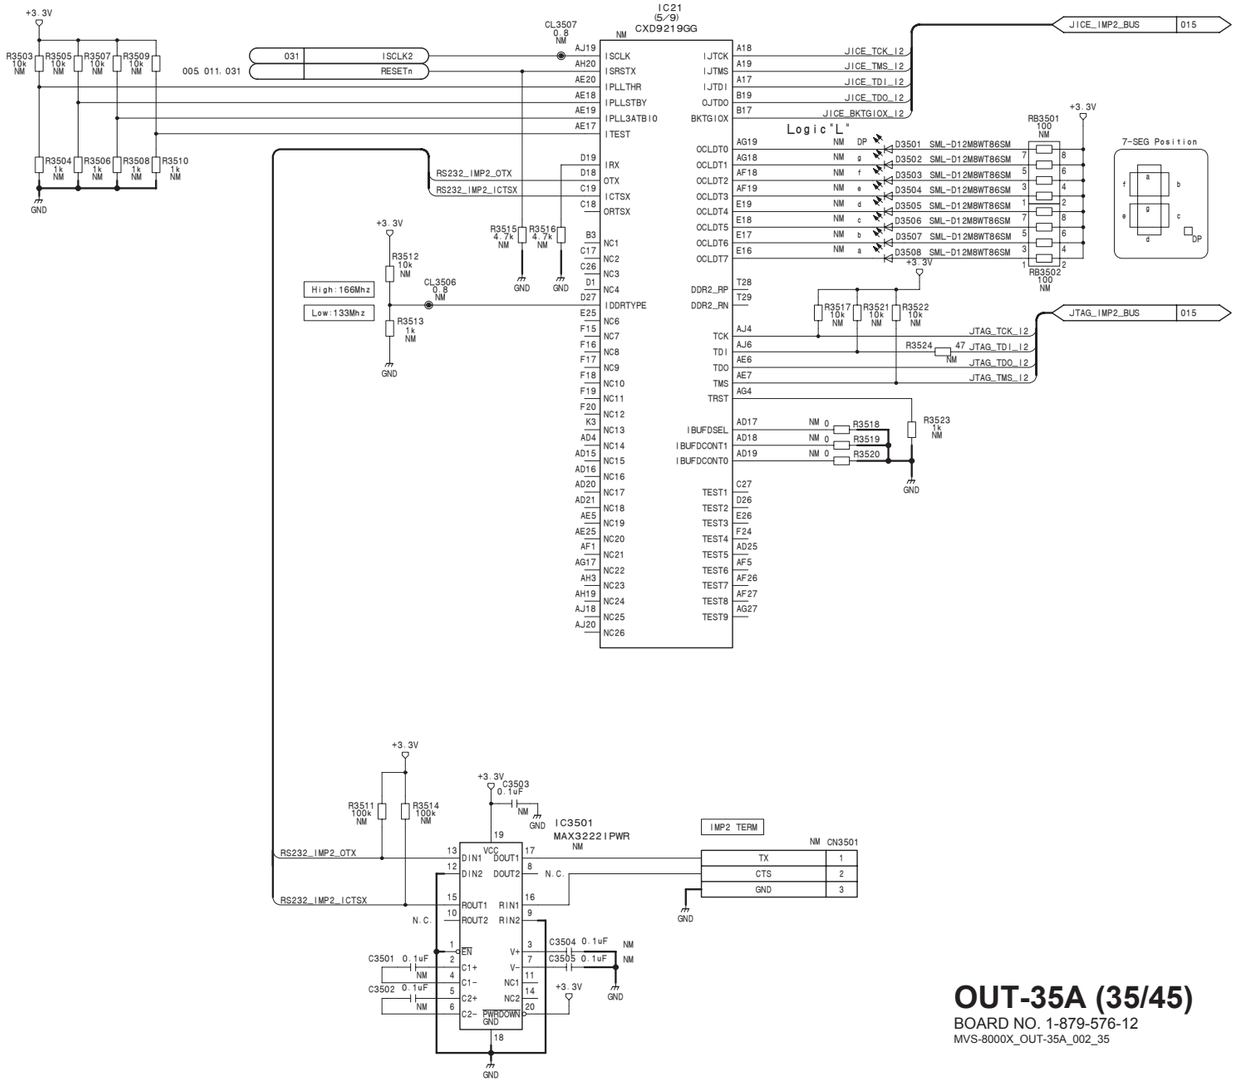

LEFT

OUT-35A (35/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_35

OUT-35A (36/45)
SUFFIX: -12

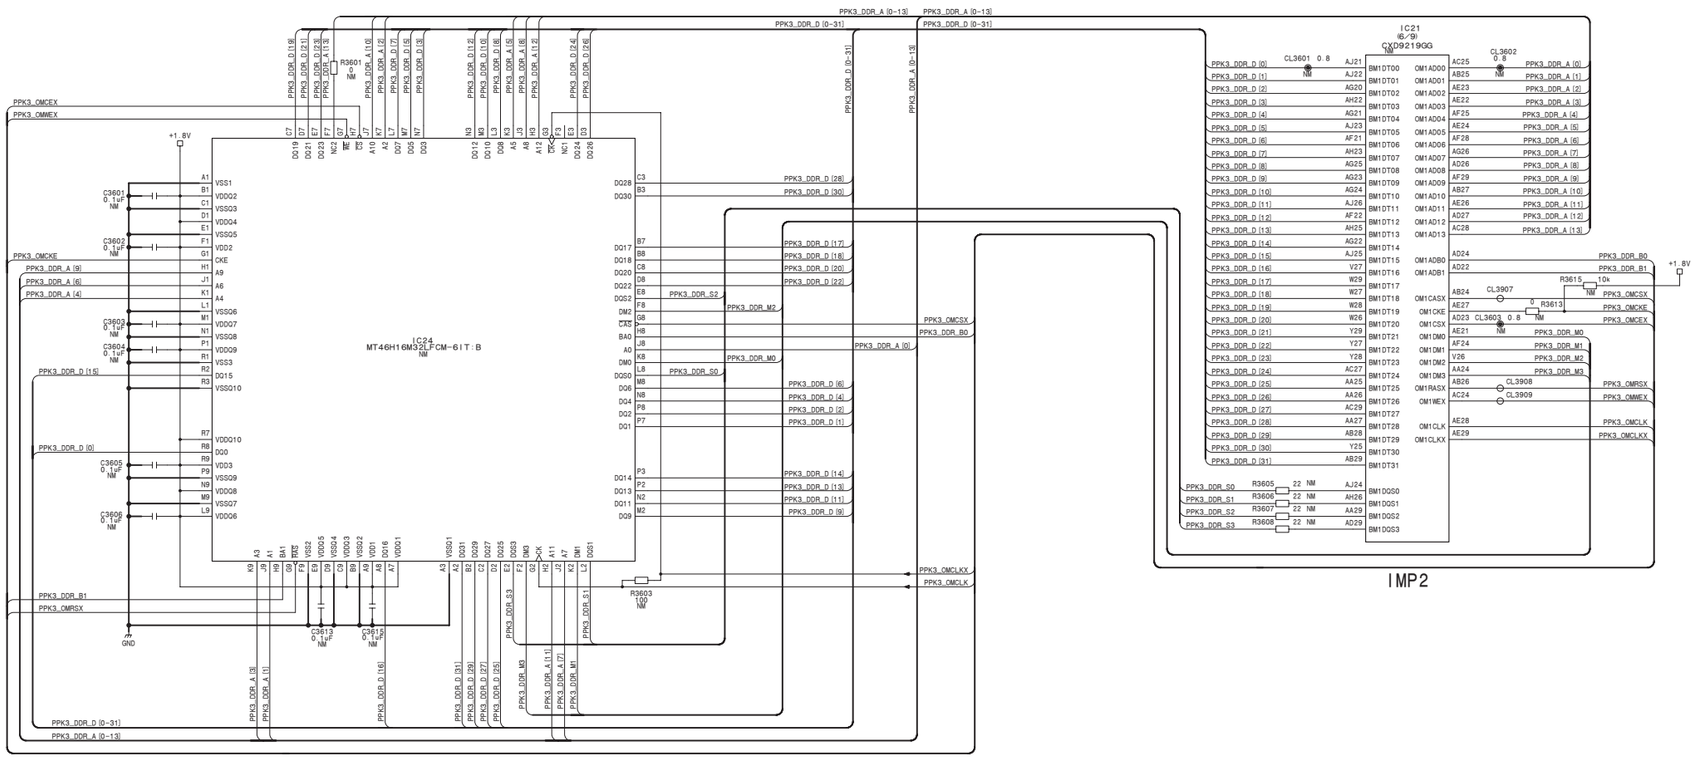

LEFT

OUT-35A (36/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_36

OUT-35A (37/45)
SUFFIX: -12

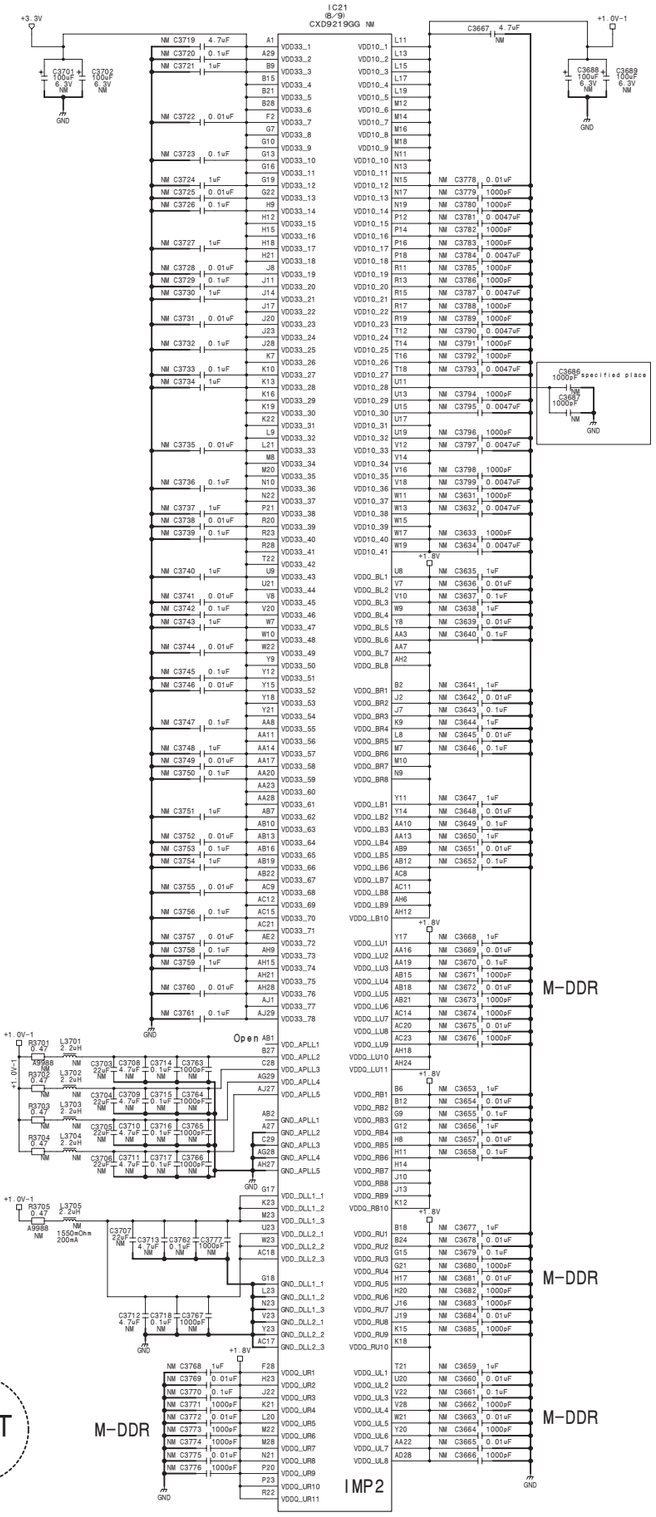

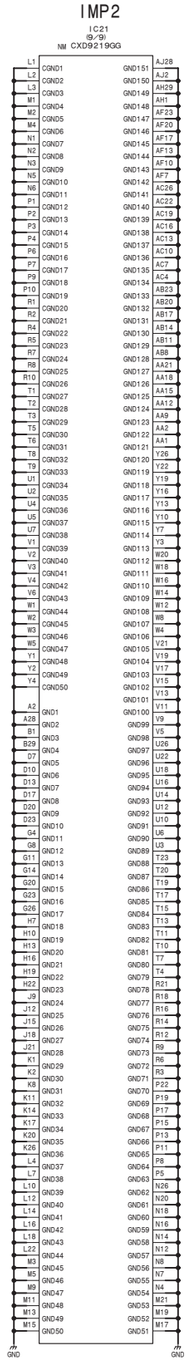

OUT-35A (37/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_37

4-316

OUT-35A (38/45)
SUFFIX: -12

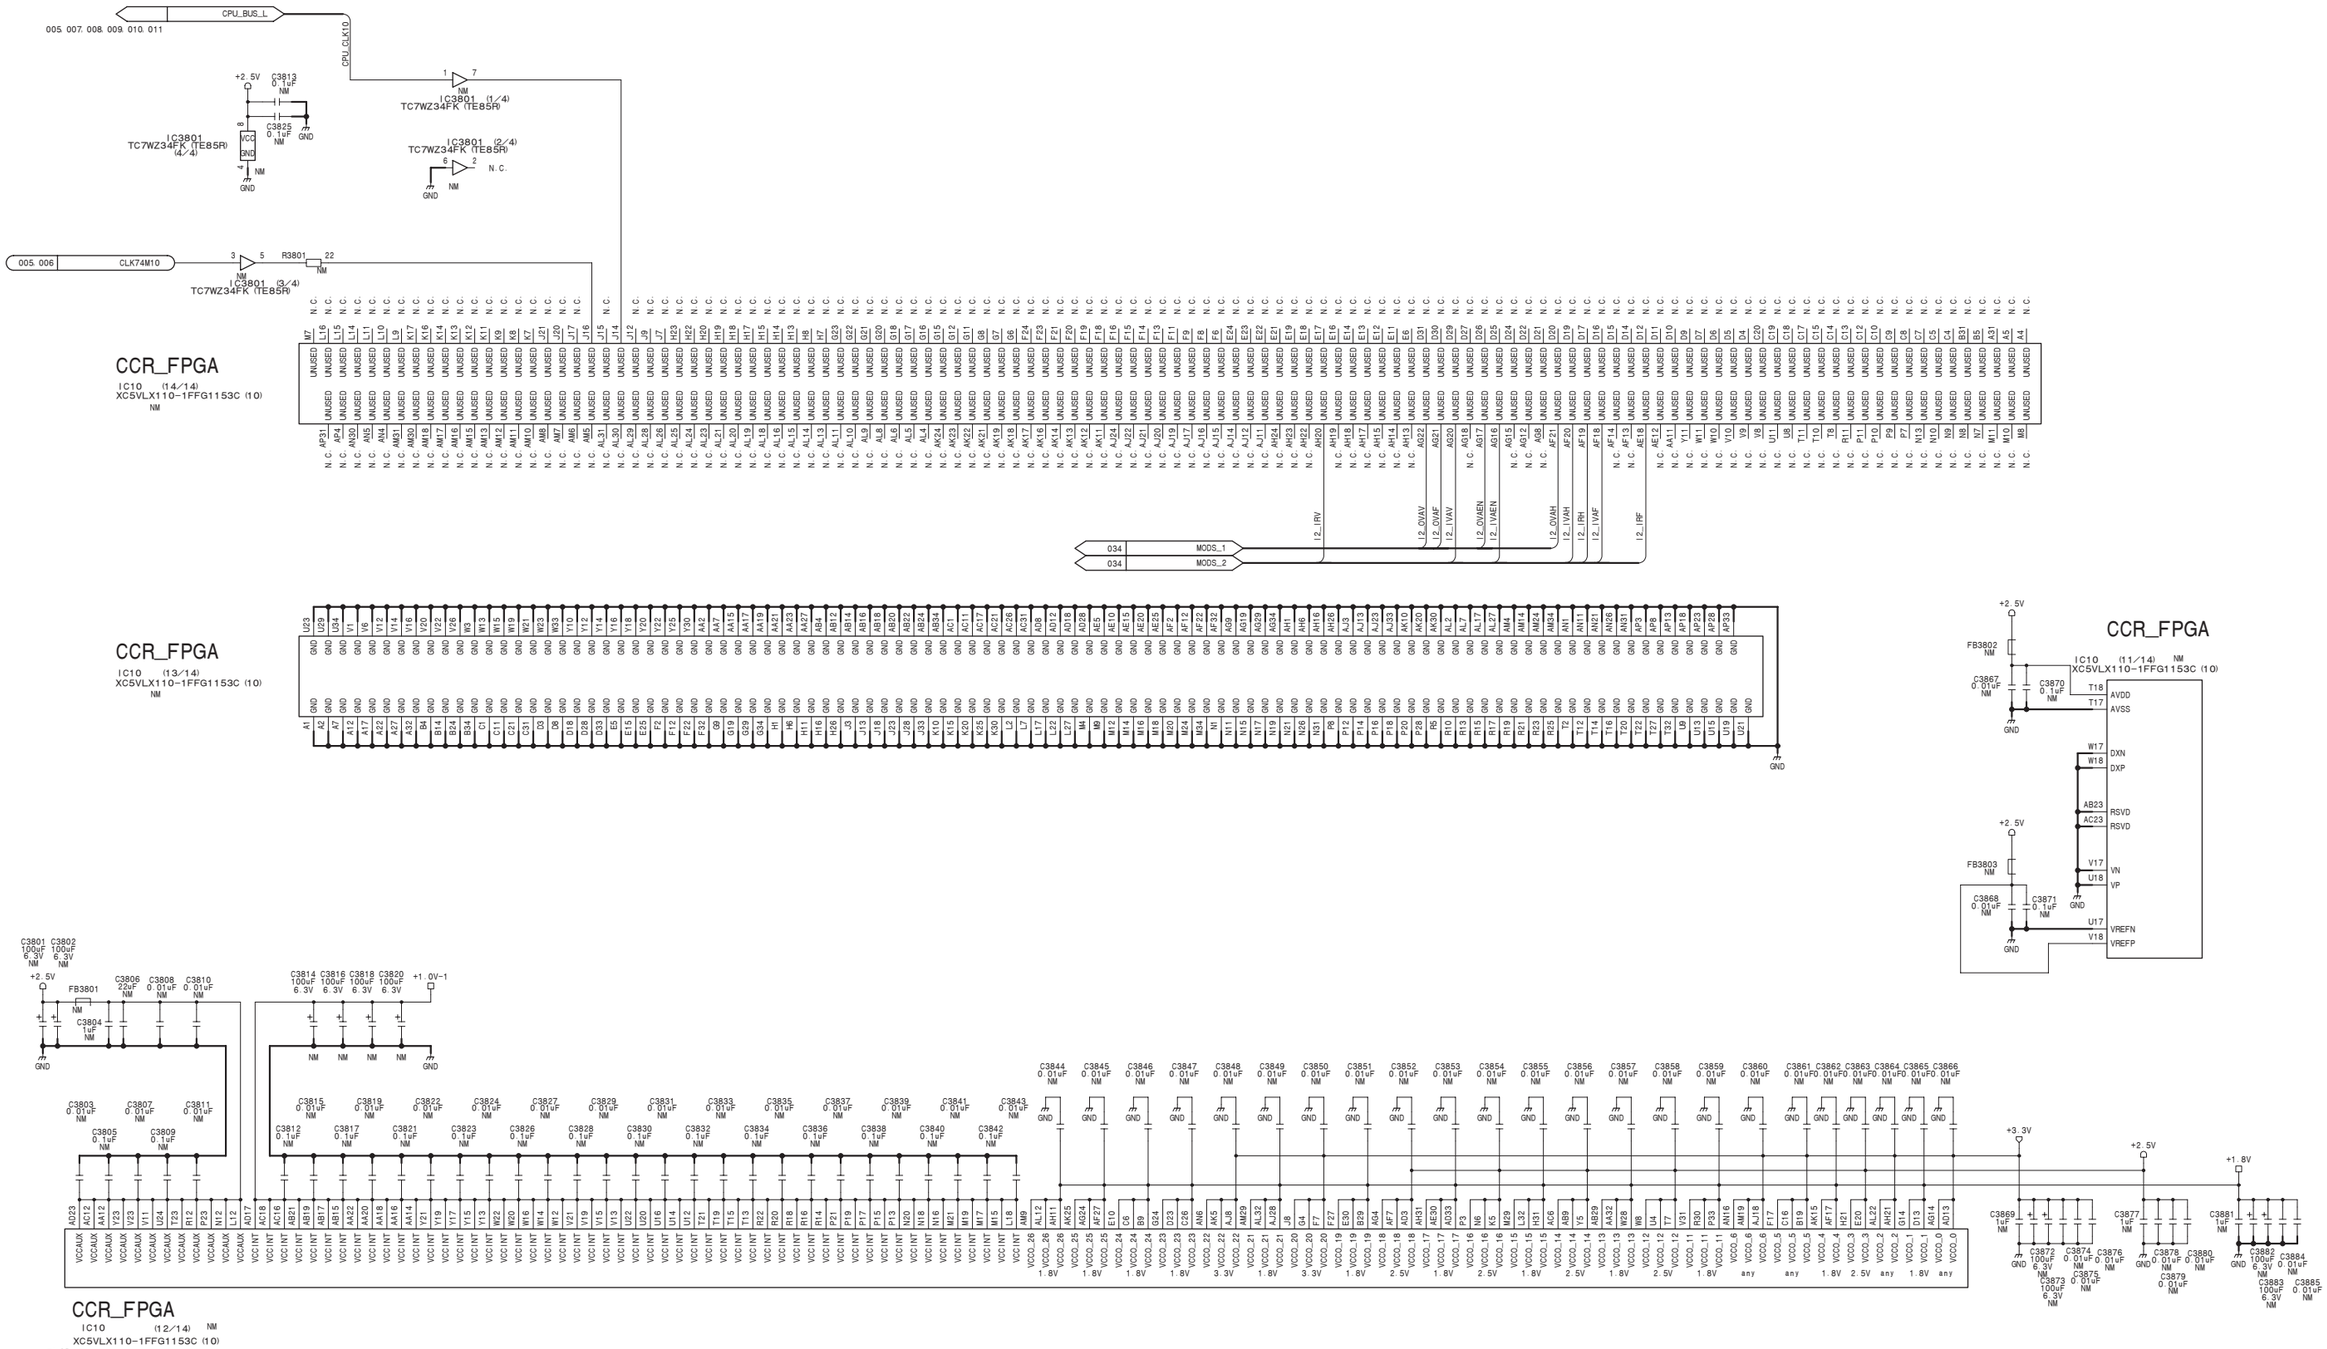

OUT-35A (38/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_38

OUT-35A (39/45)
SUFFIX: -12

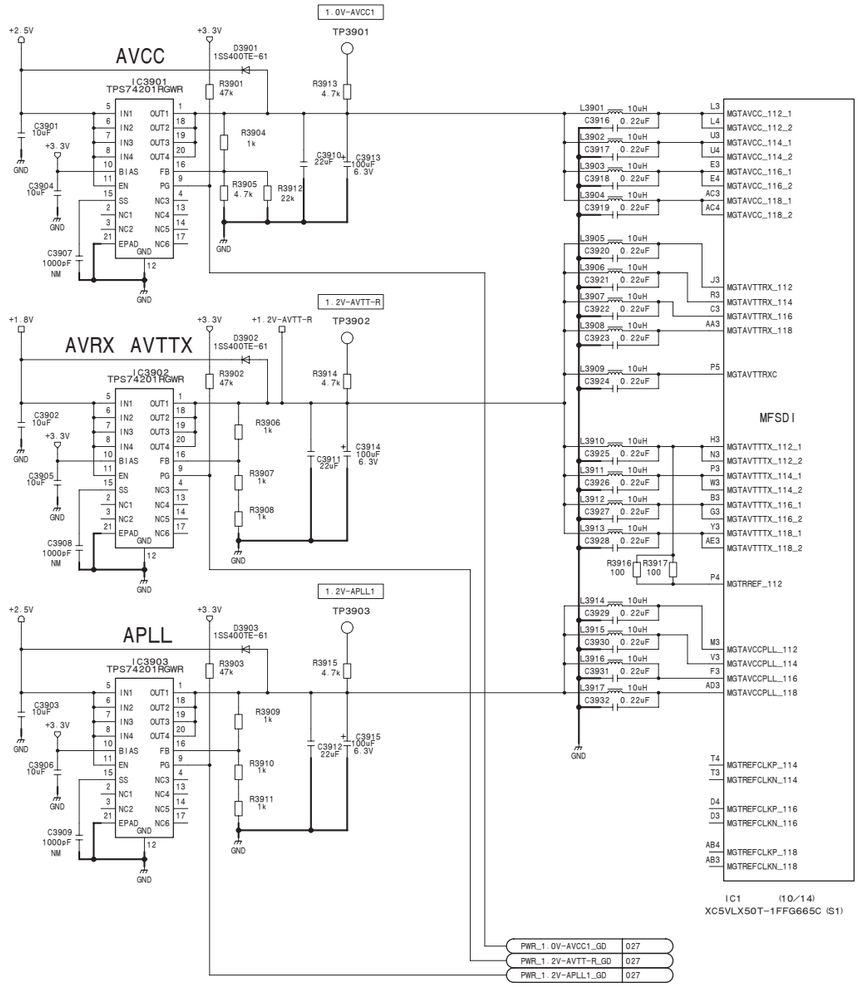

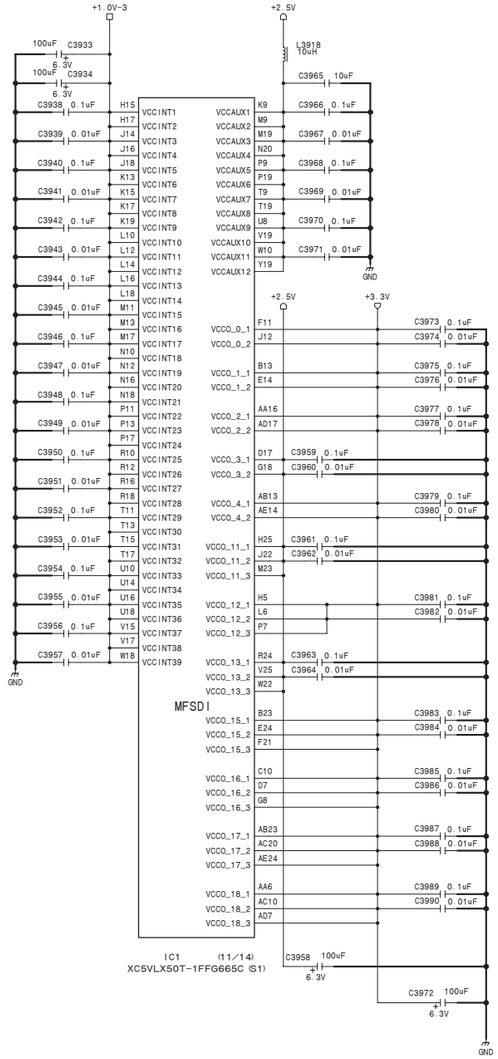

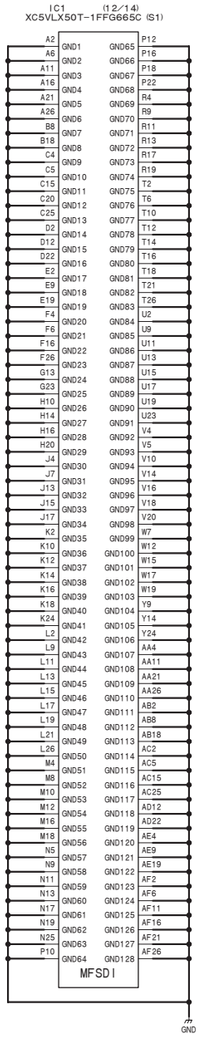

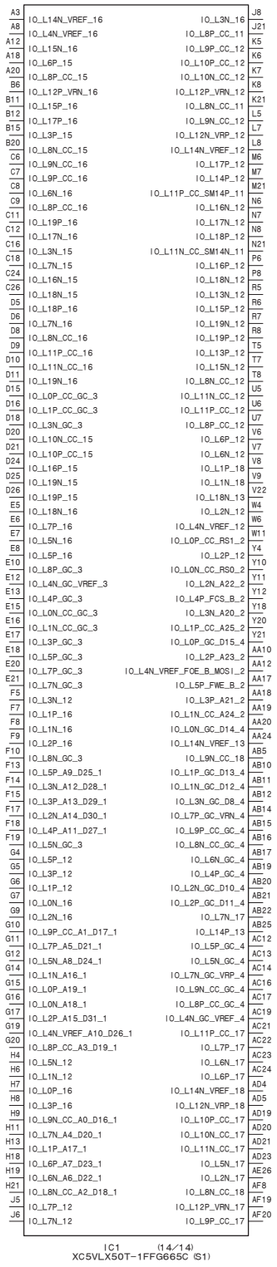



RIGHT

4-318

OUT-35A (39/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_39

OUT-35A (40/45)
SUFFIX: -12

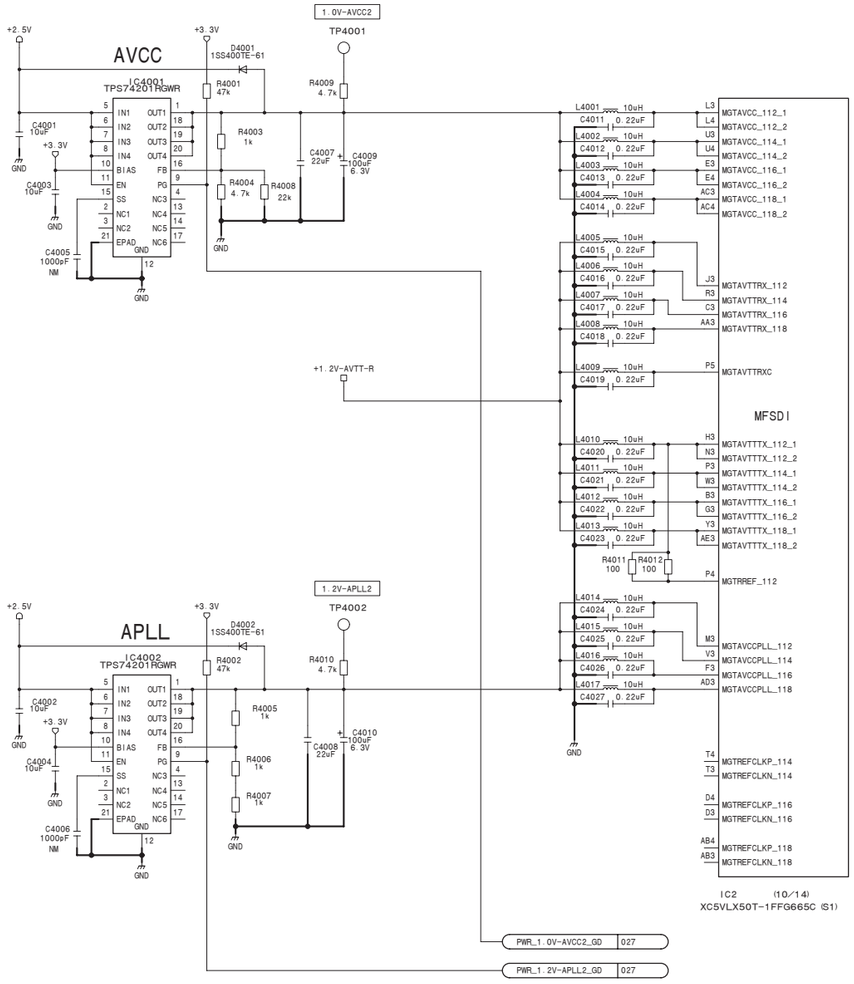

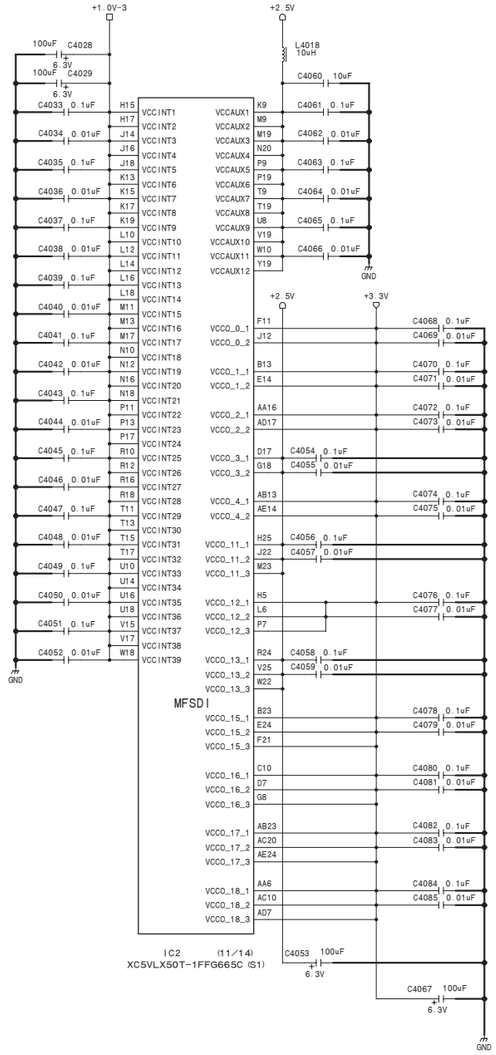

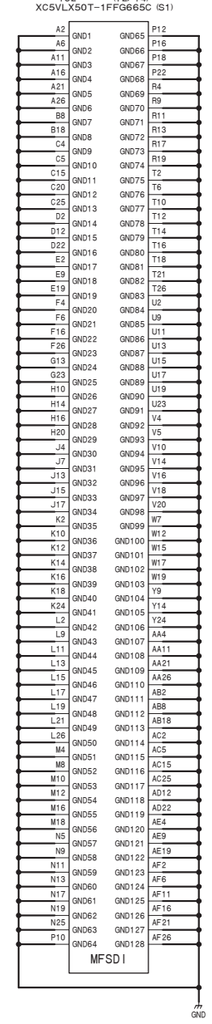

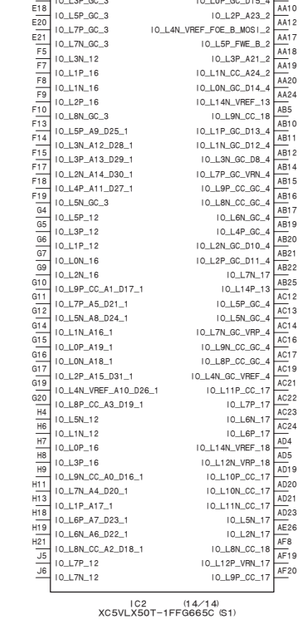





RIGHT

OUT-35A (40/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_40

OUT-35A (41/45)
SUFFIX: -12

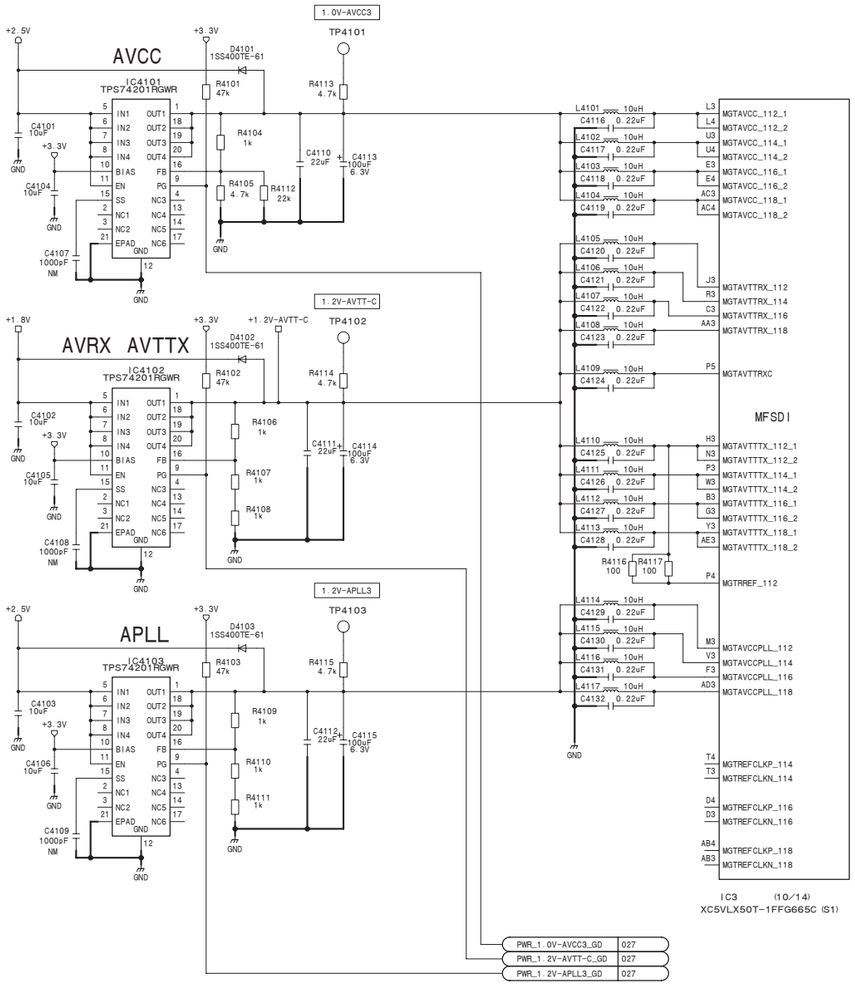

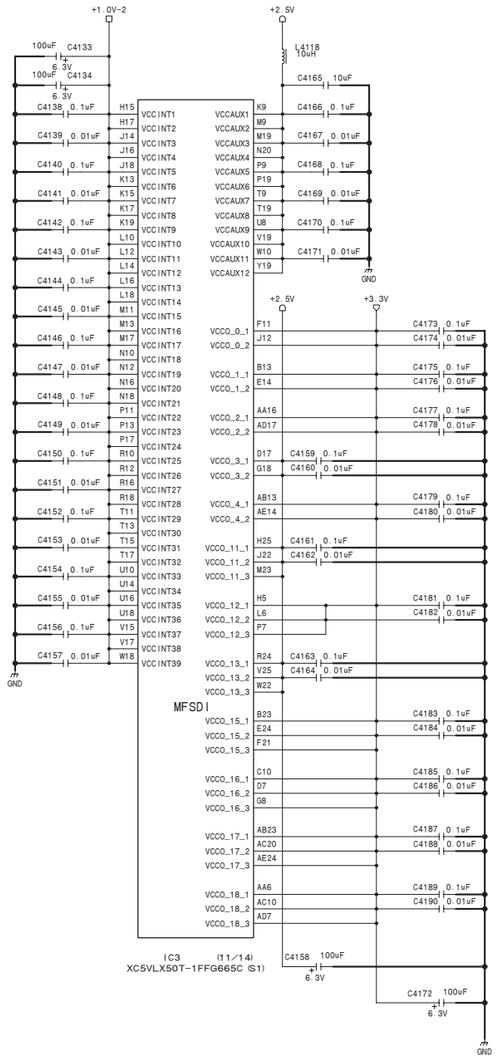

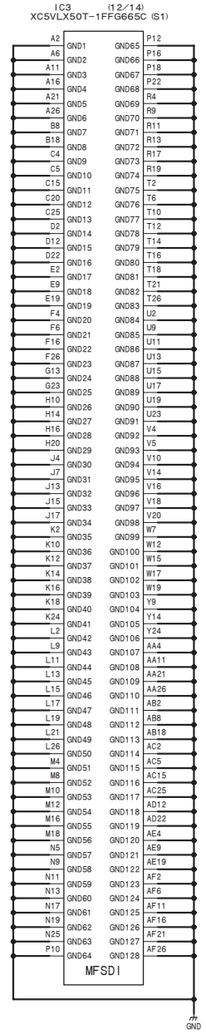

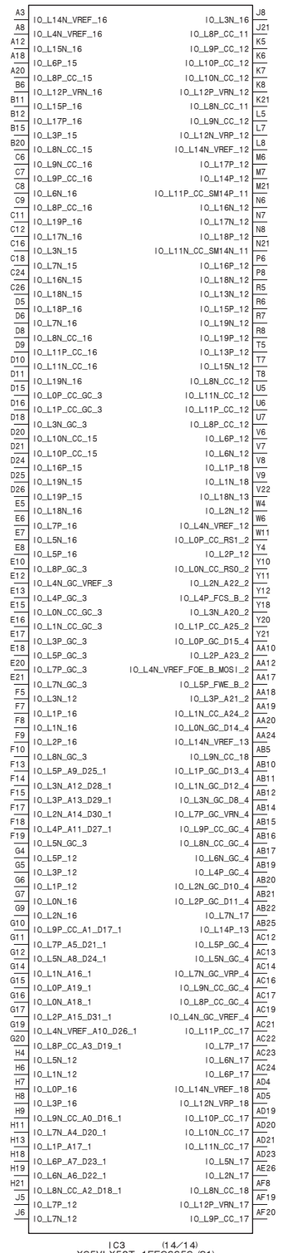



CENTER

OUT-35A (41/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_41

OUT-35A (42/45)

SUFFIX: -12

OUT-35A (42/45)

SUFFIX: -12

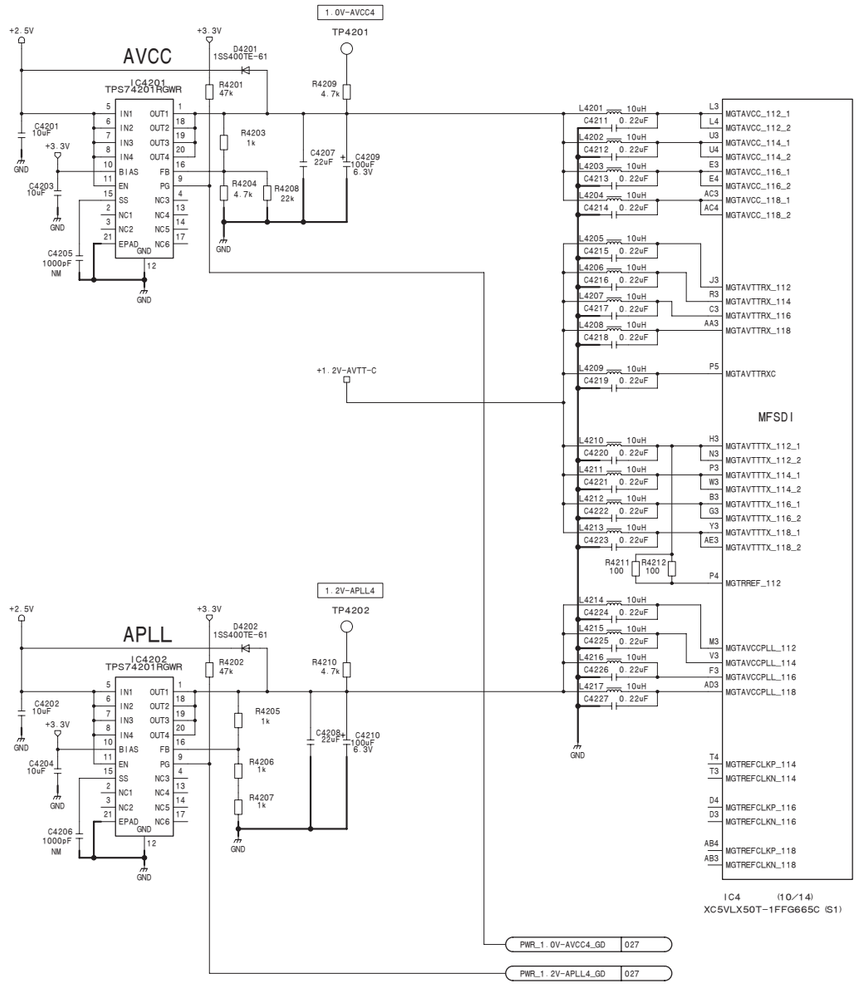

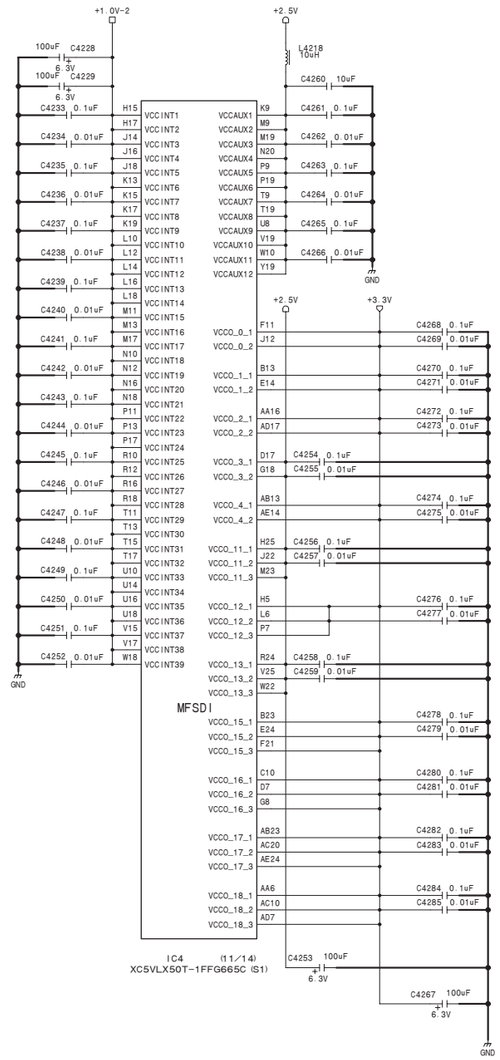

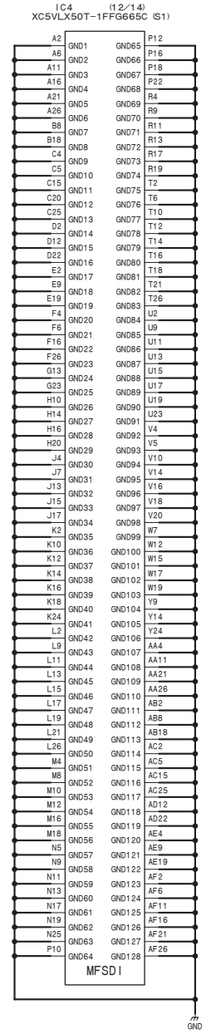

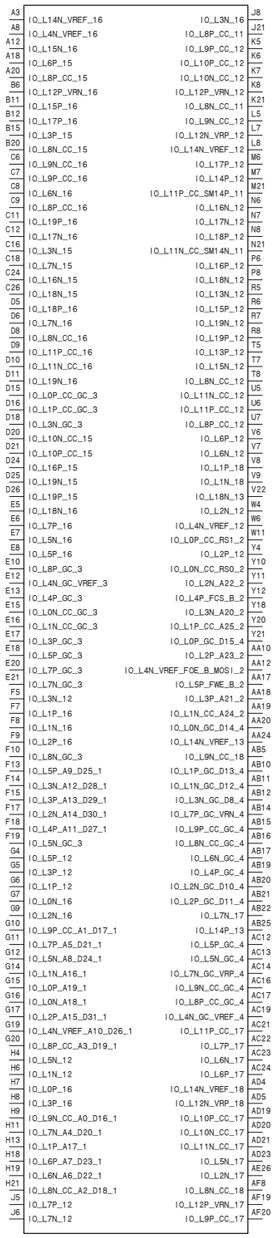

OUT-35A (42/45)

BOARD NO. 1-879-576-12

MVS-8000X_OUT-35A_002_42

CEN TER

A B C D E F G H

1 2 3 4 5

OUT-35A (43/45)
SUFFIX: -12

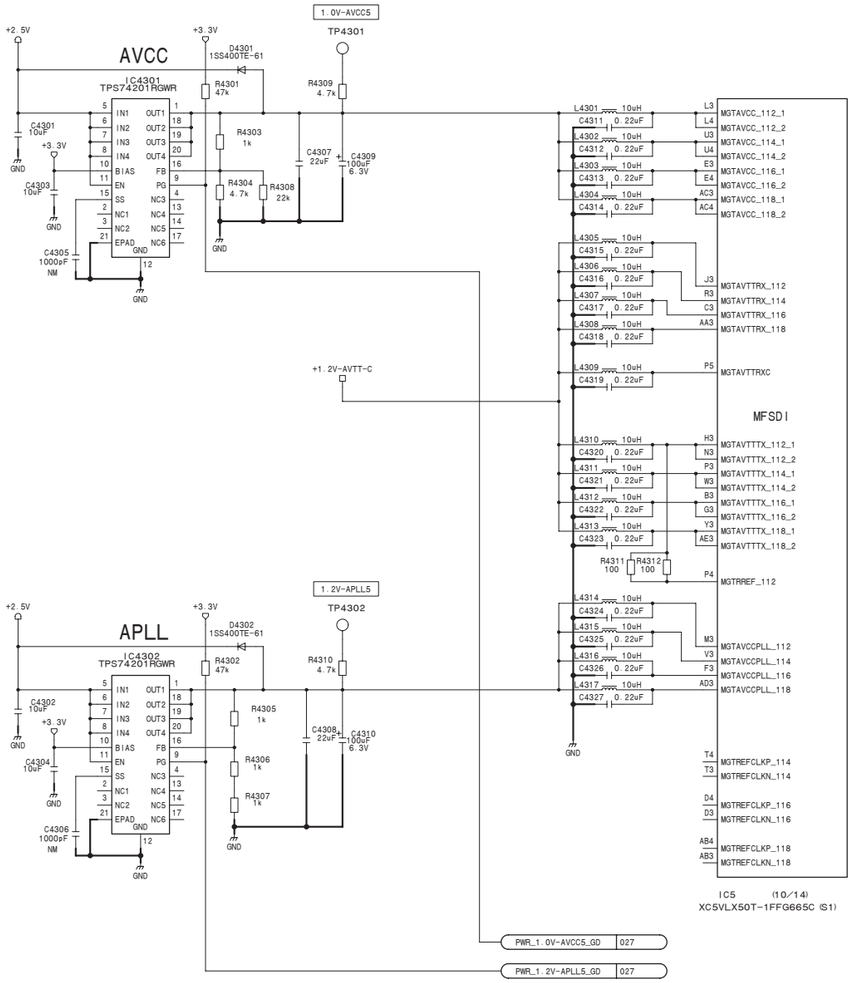

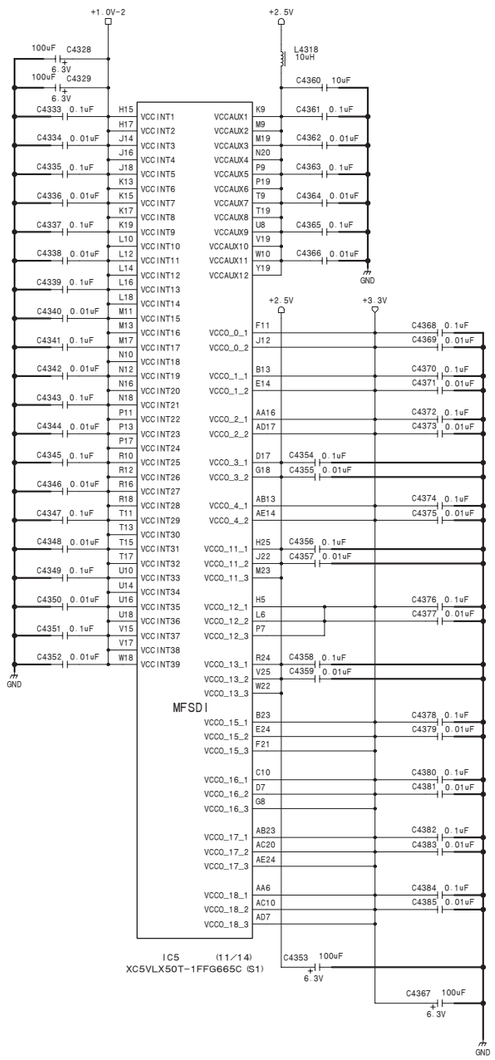

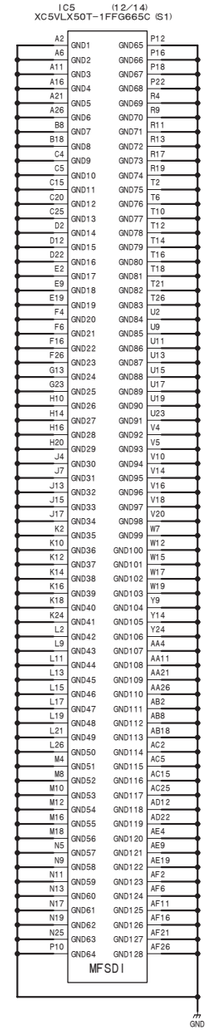

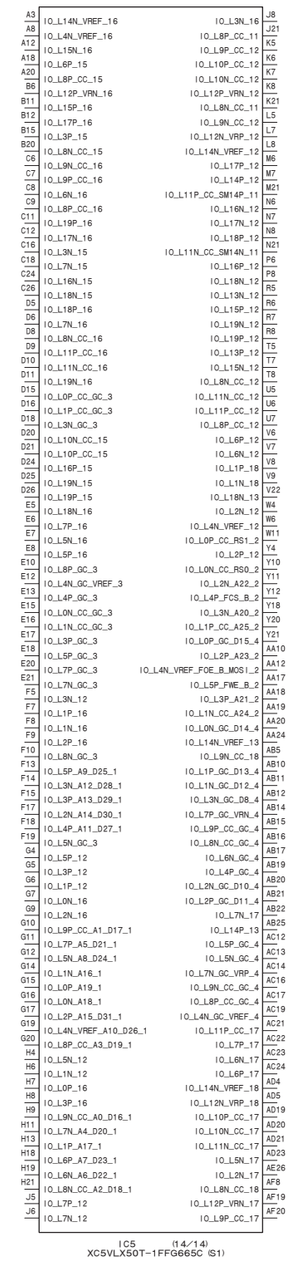



CENTER

OUT-35A (43/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_43

OUT-35A (44/45)
SUFFIX: -12

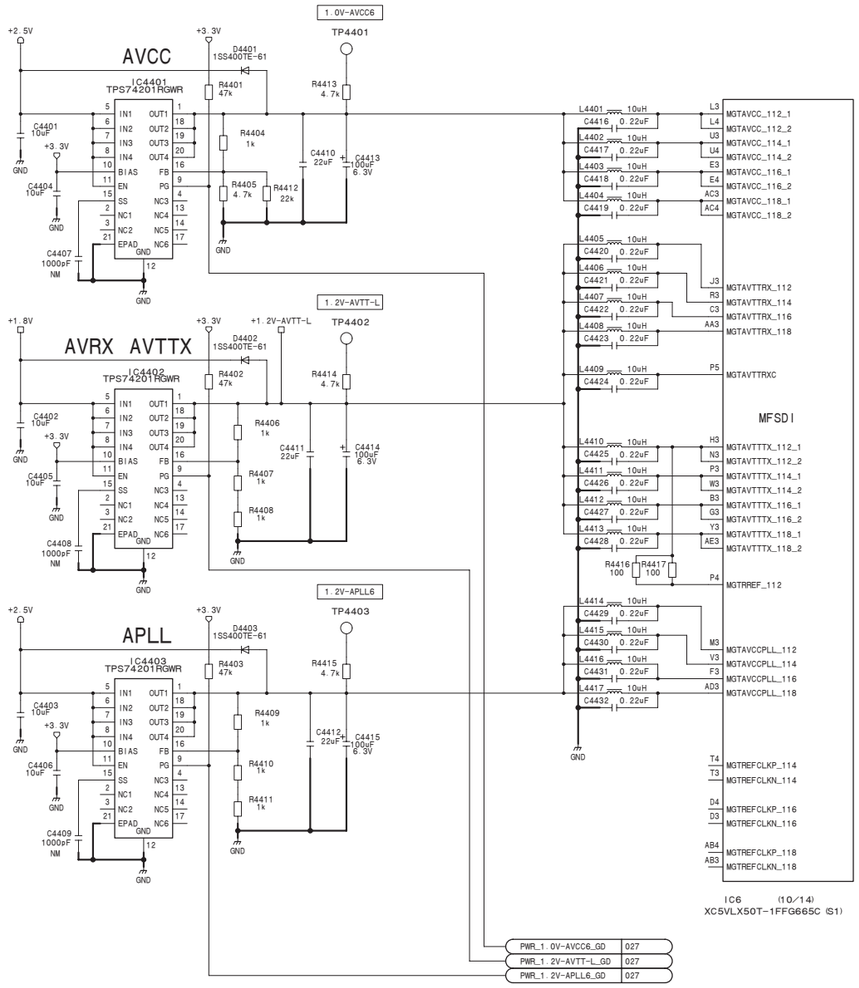

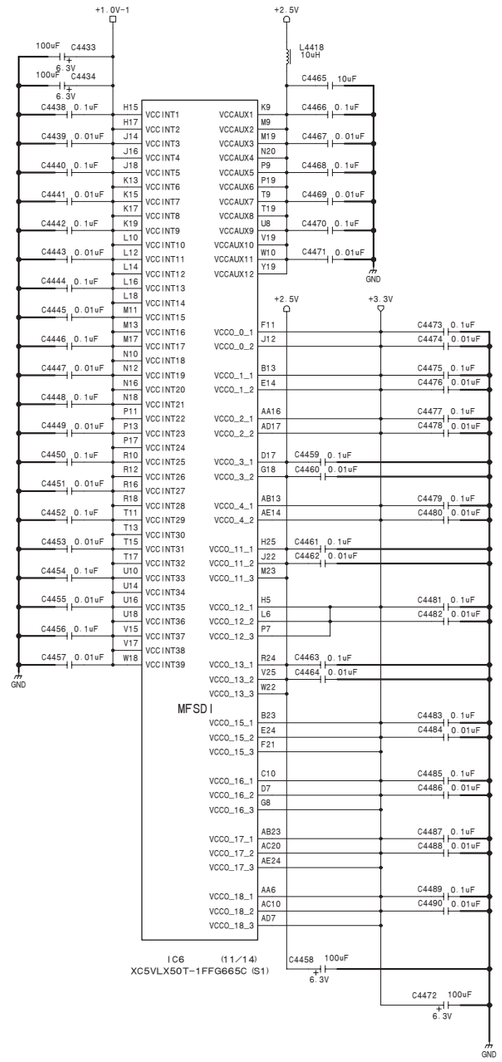



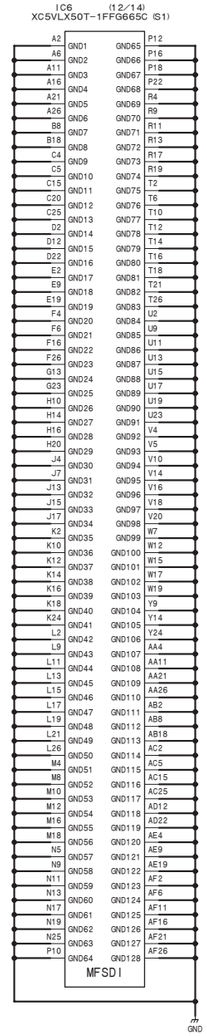

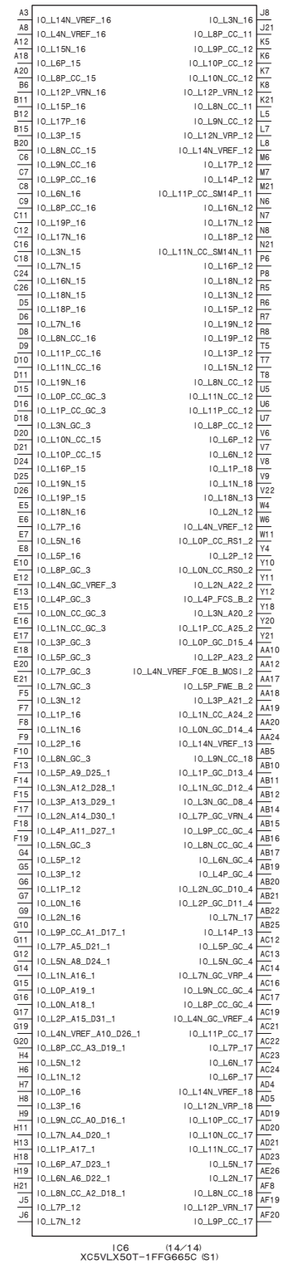

OUT-35A (45/45)
SUFFIX: -12

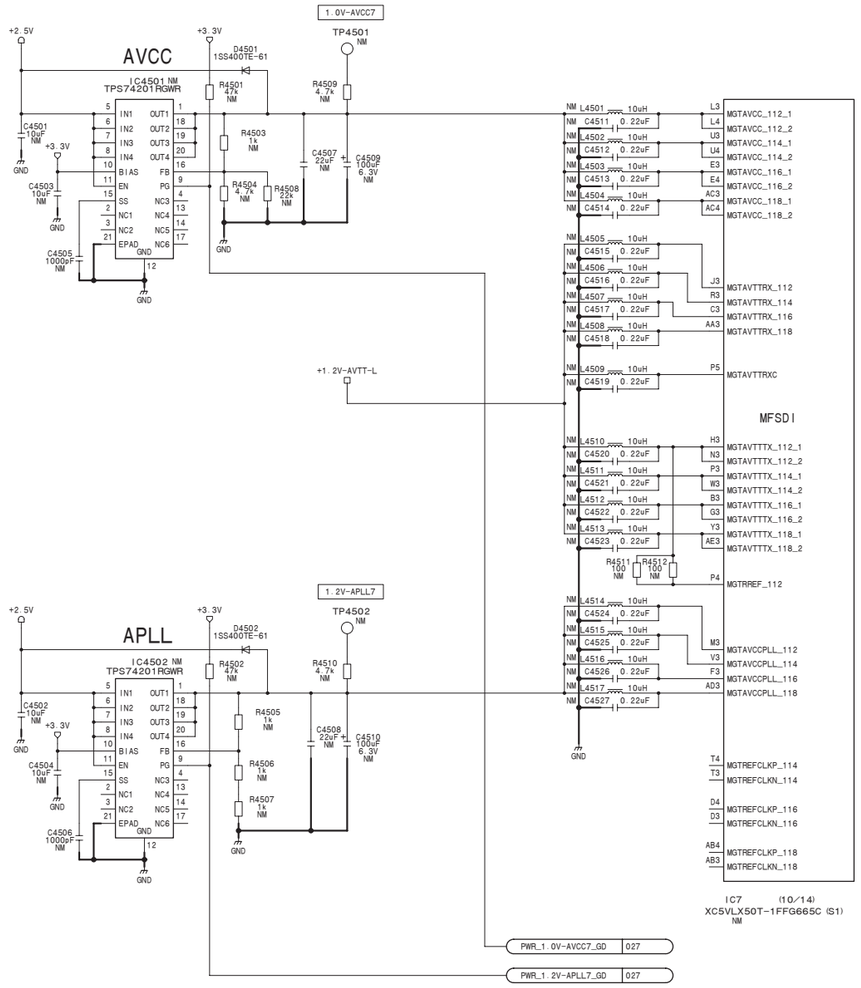

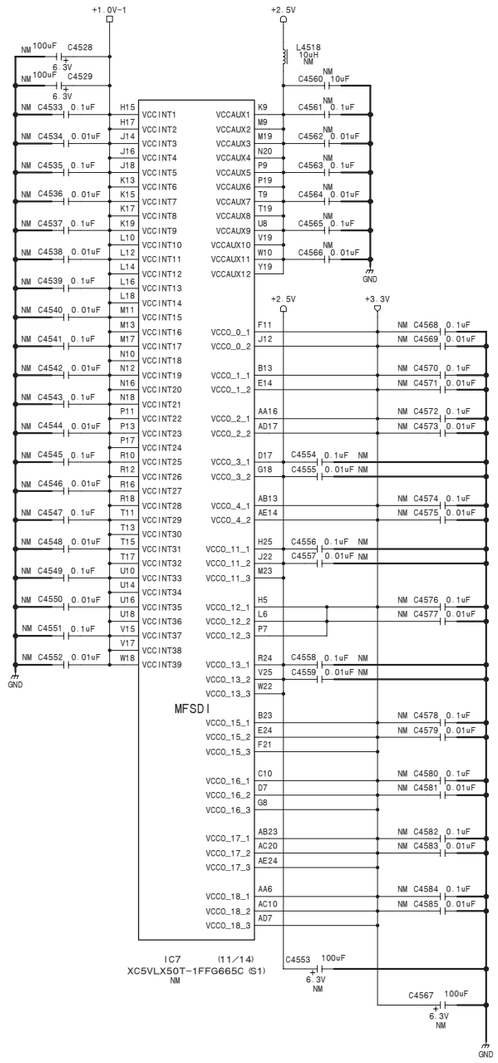



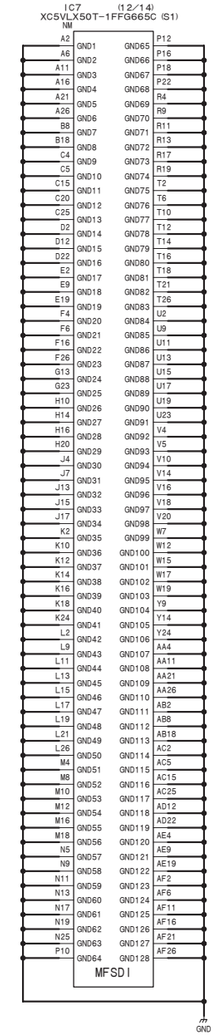

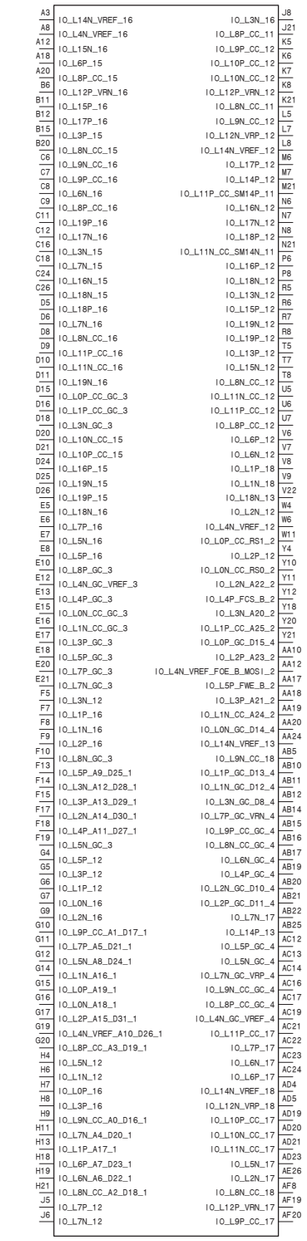

LEFT

OUT-35A (45/45)
BOARD NO. 1-879-576-12
MVS-8000X_OUT-35A_002_45

SG-272A (1/3) SUFFIX: -22

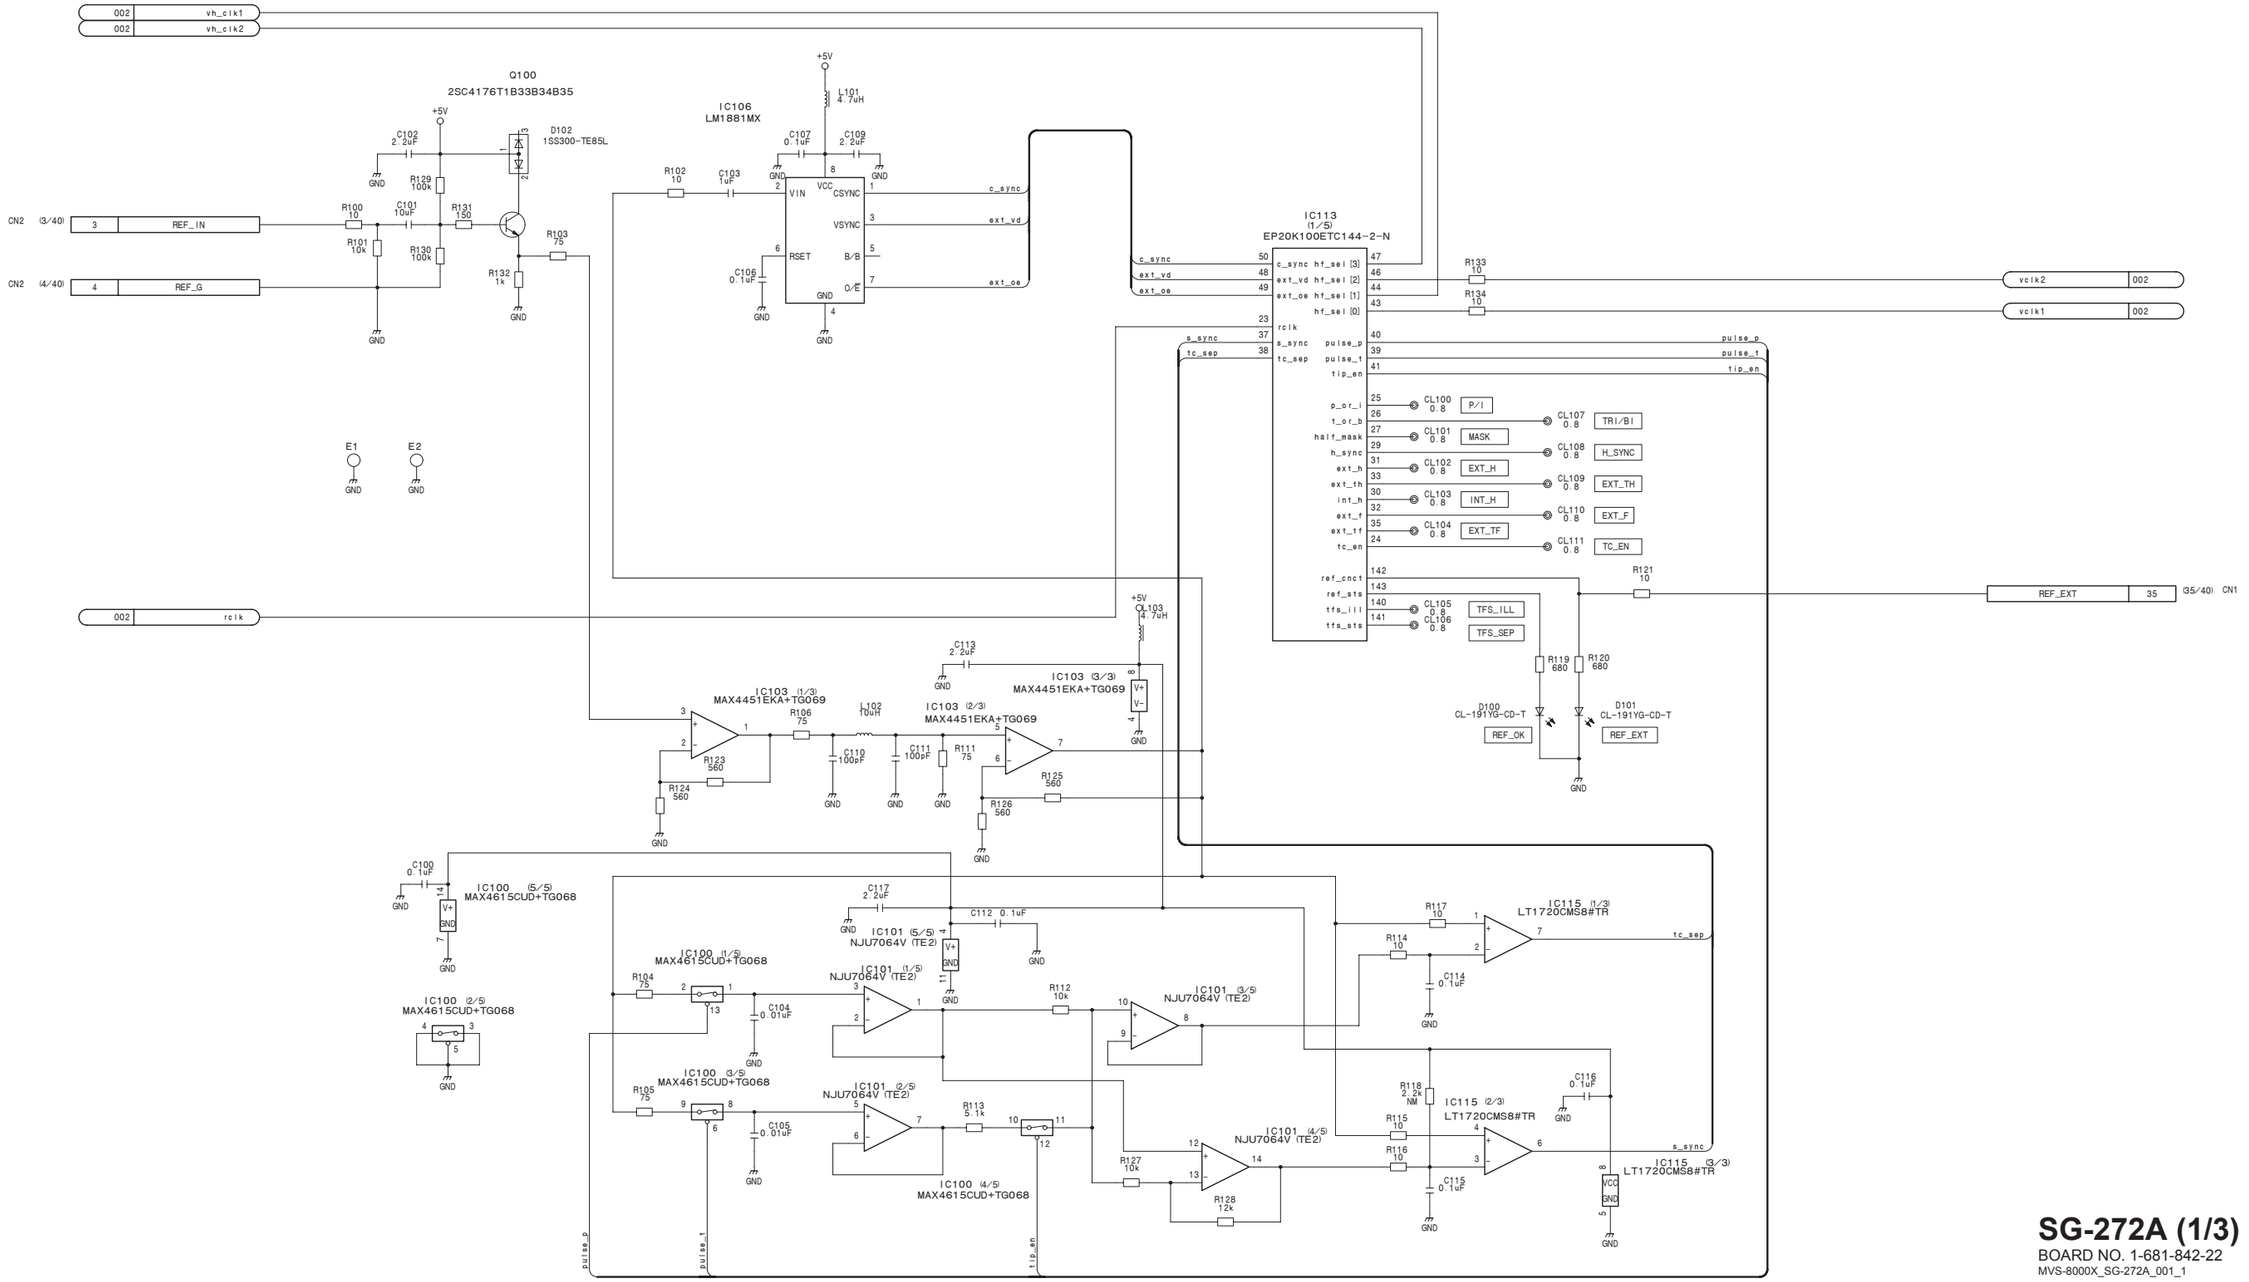

SG-272A (1/3)
BOARD NO. 1-681-842-22
MVS-8000X_SG-272A_001_1

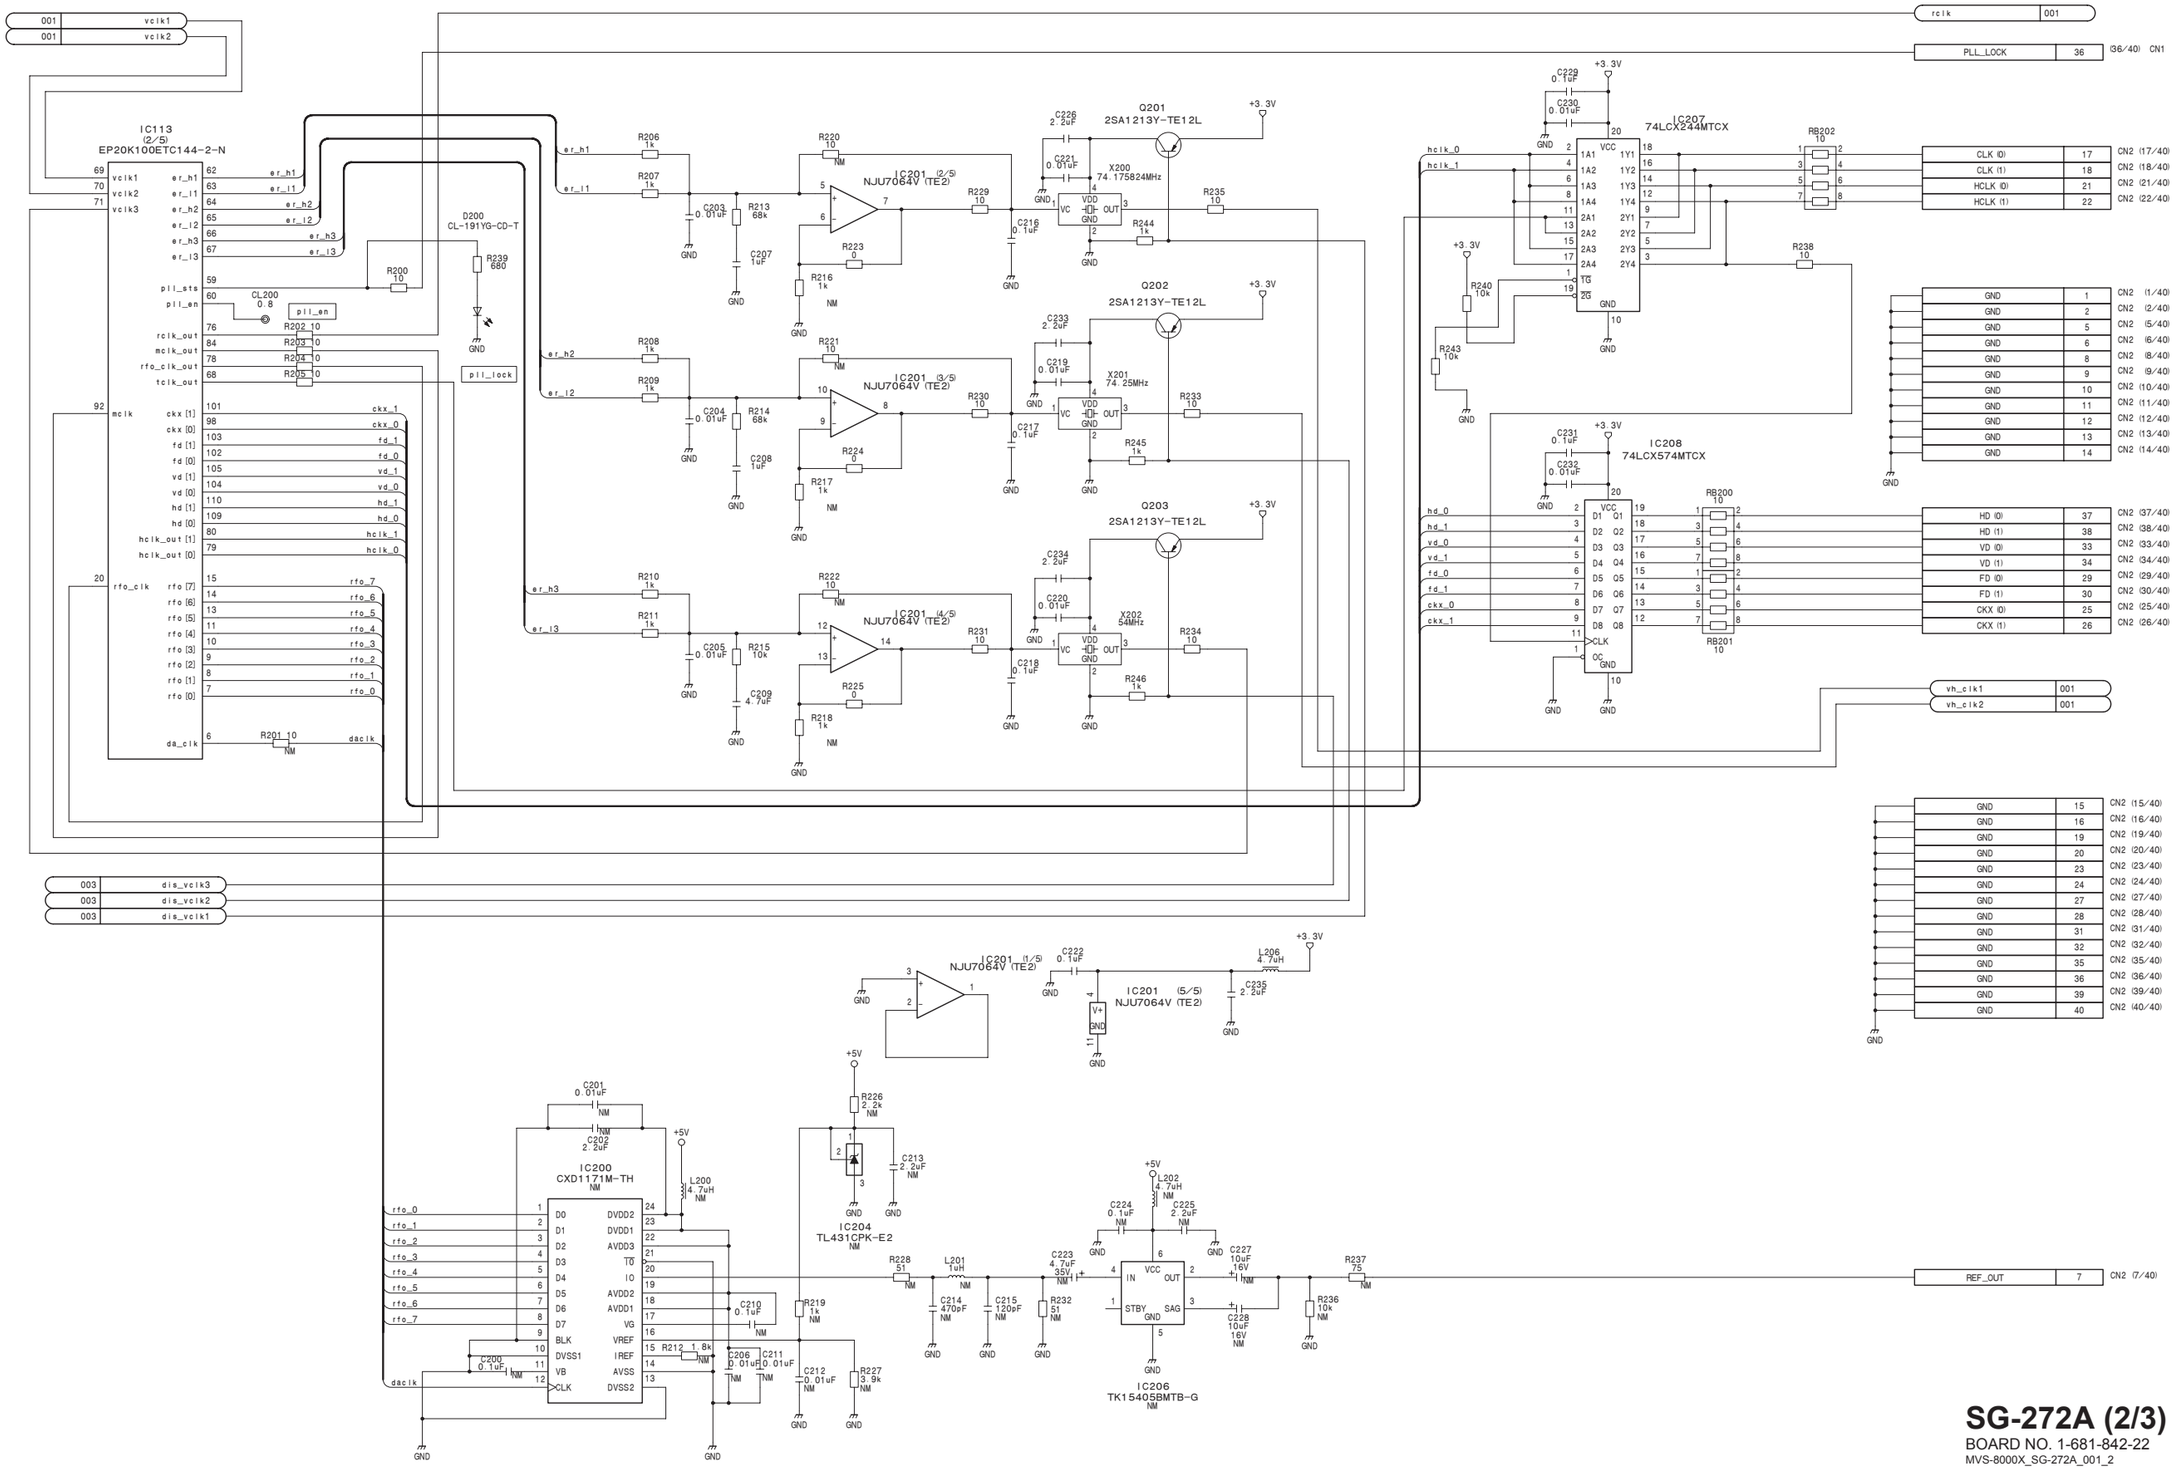
001 vclk1
001 vclk2
IC113 (2/5) EP20K100ETC144-2-N
D200 CL-191YG-CD-T
R239 680
CL200 0.8
pll_en
pll_lock
R200 10
R202 10
R203 10
R204 10
R205 10
R206 1k
R207 1k
R208 1k
R209 1k
R210 1k
R211 1k
R201 10 NM
IC201 (2/5) NJU7064V (TE2)
IC201 (3/5) NJU7064V (TE2)
IC201 (4/5) NJU7064V (TE2)
IC201 (1/5) NJU7064V (TE2)
IC201 (5/5) NJU7064V (TE2)
Q201 2SA1213Y-TE12L
Q202 2SA1213Y-TE12L
Q203 2SA1213Y-TE12L
X200 74.175824MHz
X201 74.25MHz
X202 54MHz
rclk 001
PLL_LOCK 36 (36/40) CN1
IC207 74LCX244MTCX
IC208 74LCX574MTCX
RB202 10
RB200 10
RB201 10
CLK (0) 17 CN2 (17/40)
CLK (1) 18 CN2 (18/40)
HCLK (0) 21 CN2 (21/40)
HCLK (1) 22 CN2 (22/40)
HD (0) 37 CN2 (37/40)
HD (1) 38 CN2 (38/40)
VD (0) 33 CN2 (33/40)
VD (1) 34 CN2 (34/40)
FD (0) 29 CN2 (29/40)
FD (1) 30 CN2 (30/40)
CKX (0) 25 CN2 (25/40)
CKX (1) 26 CN2 (26/40)
GND 1 CN2 (1/40)
GND 2 CN2 (2/40)
GND 5 CN2 (5/40)
GND 6 CN2 (6/40)
GND 8 CN2 (8/40)
GND 9 CN2 (9/40)
GND 10 CN2 (10/40)
GND 11 CN2 (11/40)
GND 12 CN2 (12/40)
GND 13 CN2 (13/40)
GND 14 CN2 (14/40)
vh_clk1 001
vh_clk2 001
GND 15 CN2 (15/40)
GND 16 CN2 (16/40)
GND 19 CN2 (19/40)
GND 20 CN2 (20/40)
GND 23 CN2 (23/40)
GND 24 CN2 (24/40)
GND 27 CN2 (27/40)
GND 28 CN2 (28/40)
GND 31 CN2 (31/40)
GND 32 CN2 (32/40)
GND 35 CN2 (35/40)
GND 36 CN2 (36/40)
GND 39 CN2 (39/40)
GND 40 CN2 (40/40)
003 dis_vclk3
003 dis_vclk2
003 dis_vclk1
IC200 CXD1171M-TH NM
IC204 TL431CPK-E2 NM
IC206 TK15405BMTB-G NM
L200 4.7uH NM
L201 1uH NM
L202 4.7uH NM
L206 4.7uH
REF_OUT 7 CN2 (7/40)

SG-272A (3/3)

SUFFIX: -22

SG-272A (3/3)
SUFFIX: -22

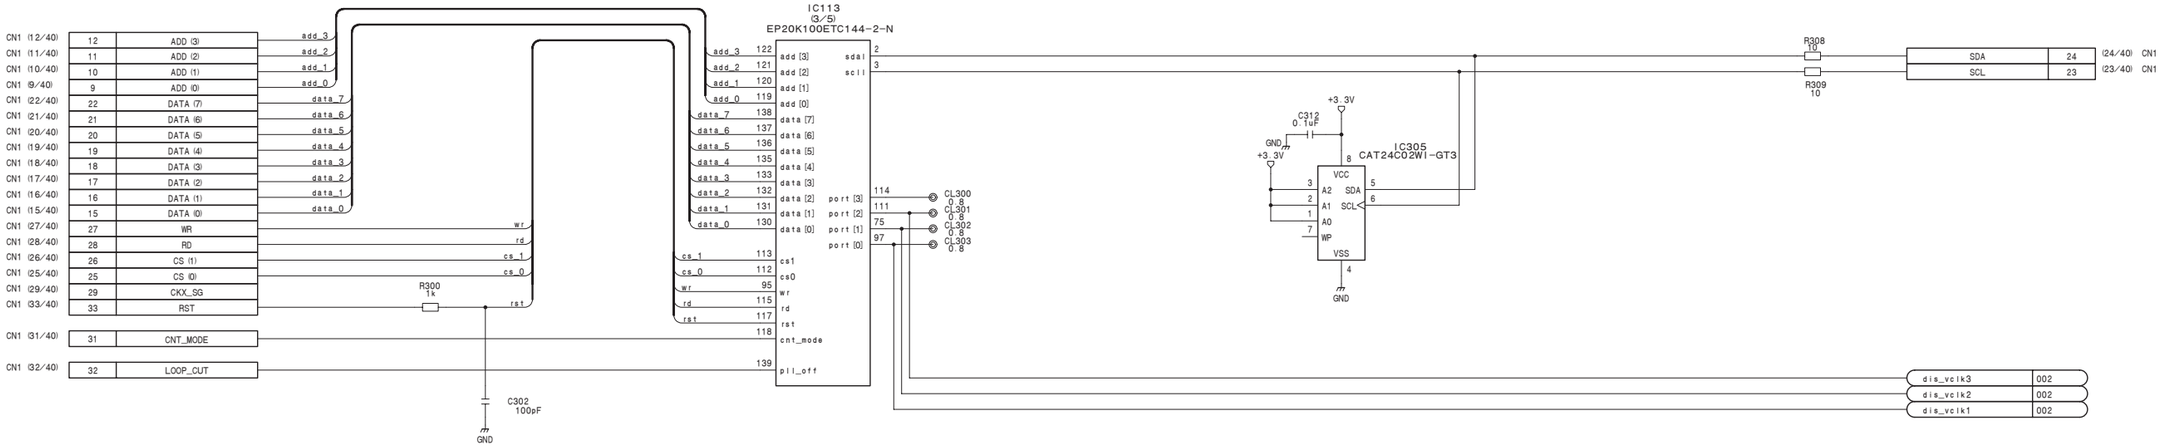

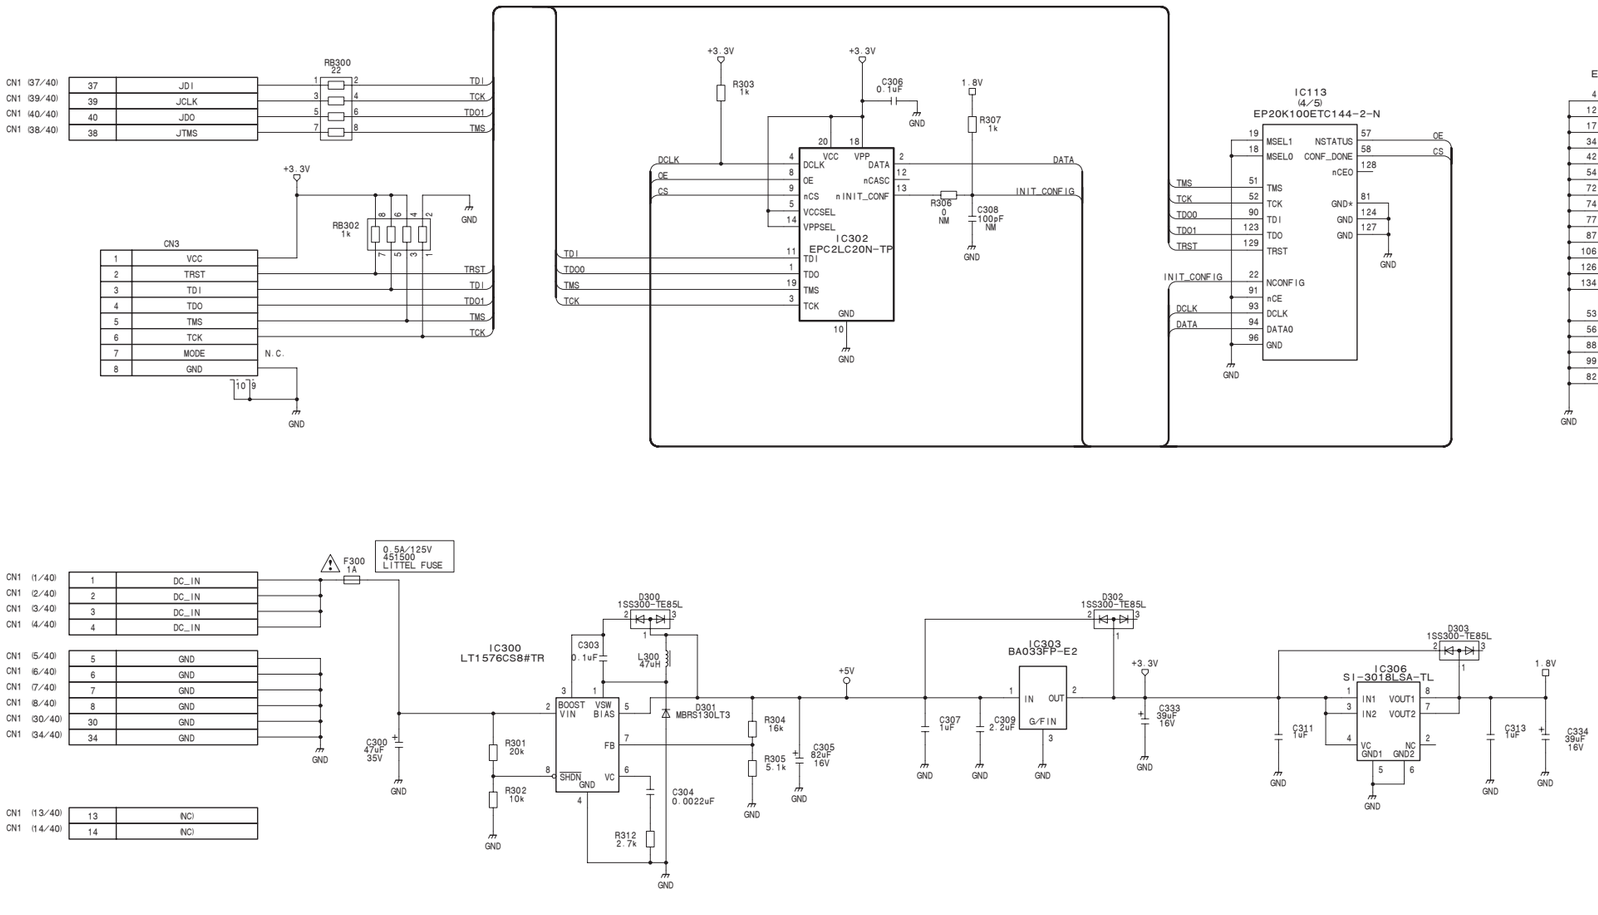

SG-272A (3/3)

BOARD NO. 1-681-842-22

MVS-8000X_SG-272A_001_3

SIO-26A (1/5)
SUFFIX: -11

SIO-26A (1/5)
SUFFIX: -11

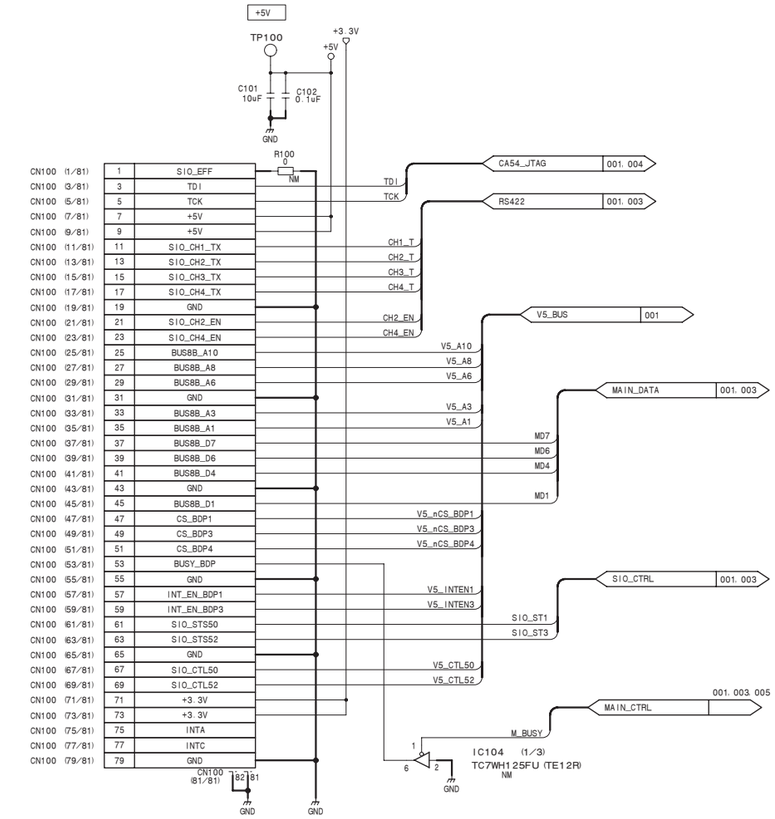

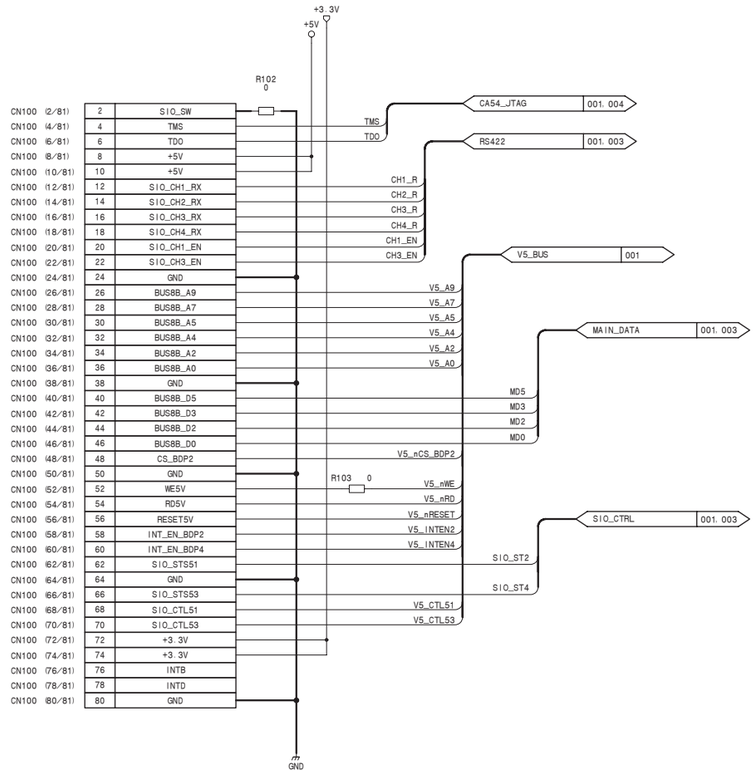

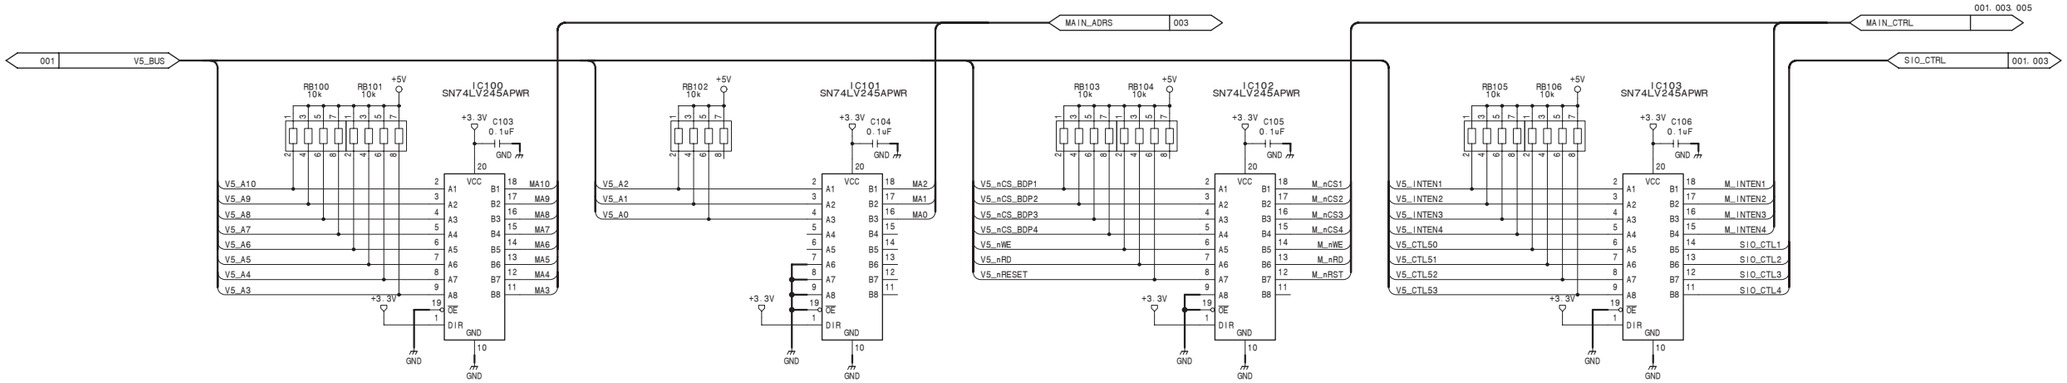



SIO-26A (1/5)
BOARD NO. 1-862-225-11
MVS-8000X_SIO-26A_001_1

SIO-26A (2/5)
SUFFIX: -11

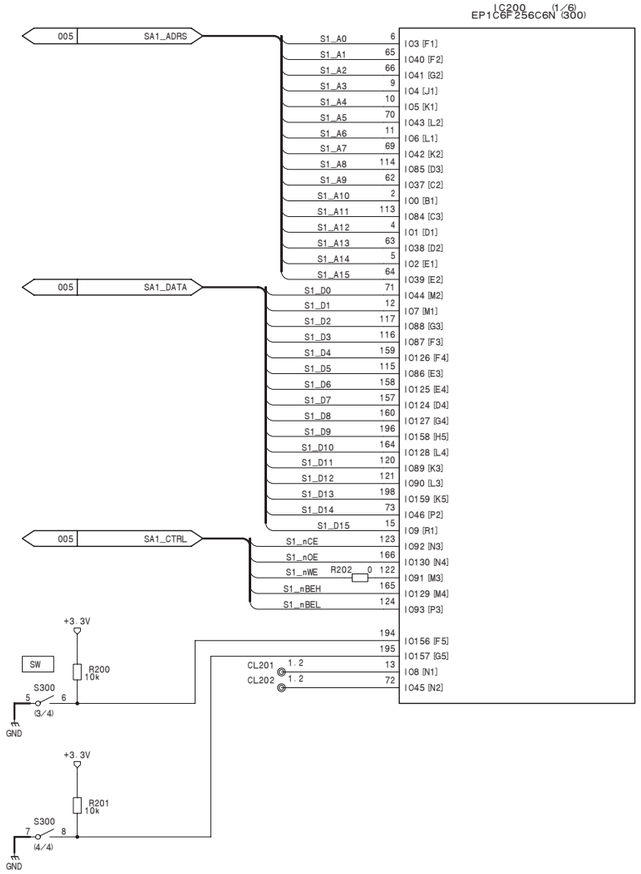

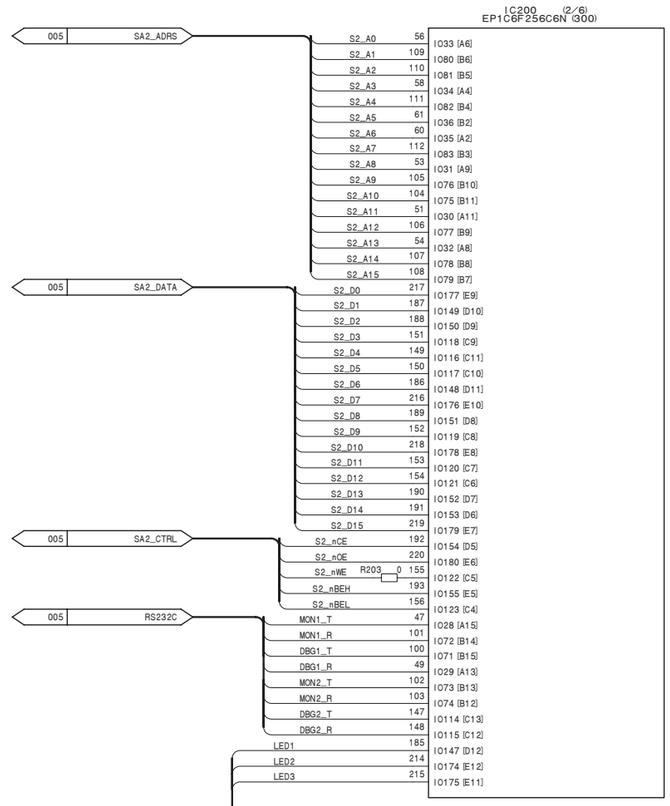



SIO-26A (2/5)

BOARD NO. 1-862-225-11

MVS-8000X_SIO-26A_001_2

SIO-26A (3/5) SUFFIX: -11

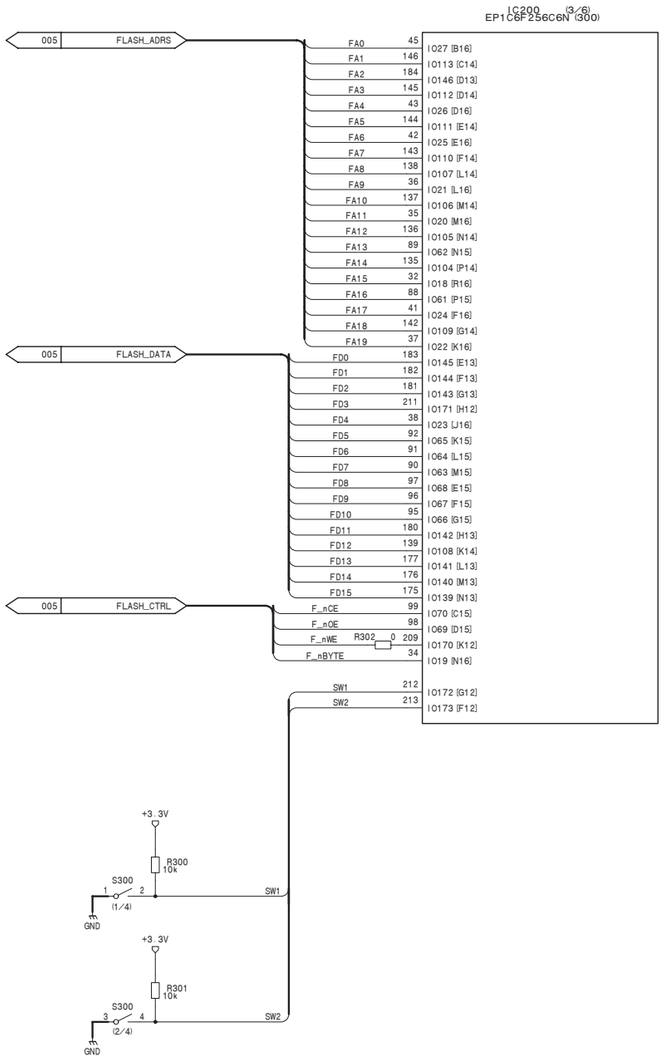

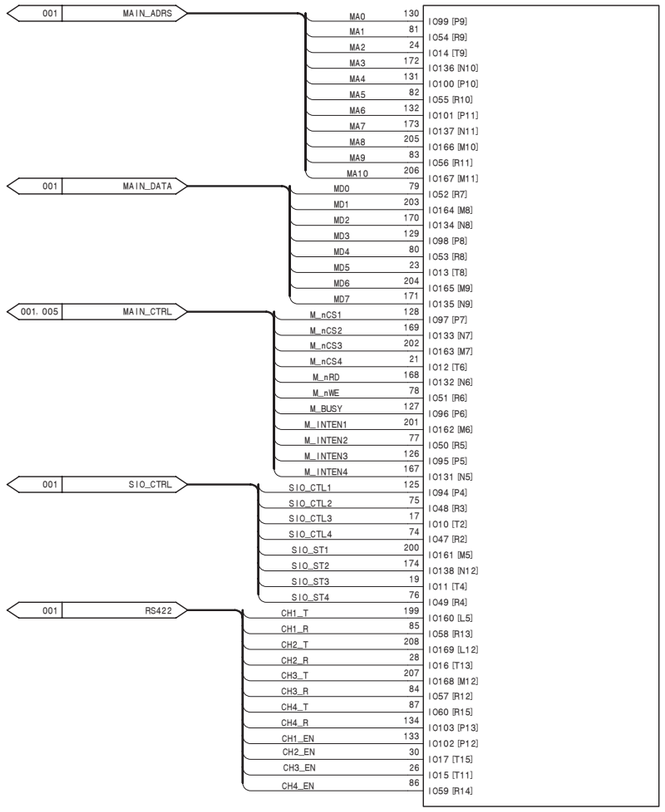

SIO-26A (3/5)

BOARD NO. 1-862-225-11

MVS-8000X_SIO-26A_001_3

SIO-26A (4/5)

SUFFIX: -11

SIO-26A (4/5)

SUFFIX: -11

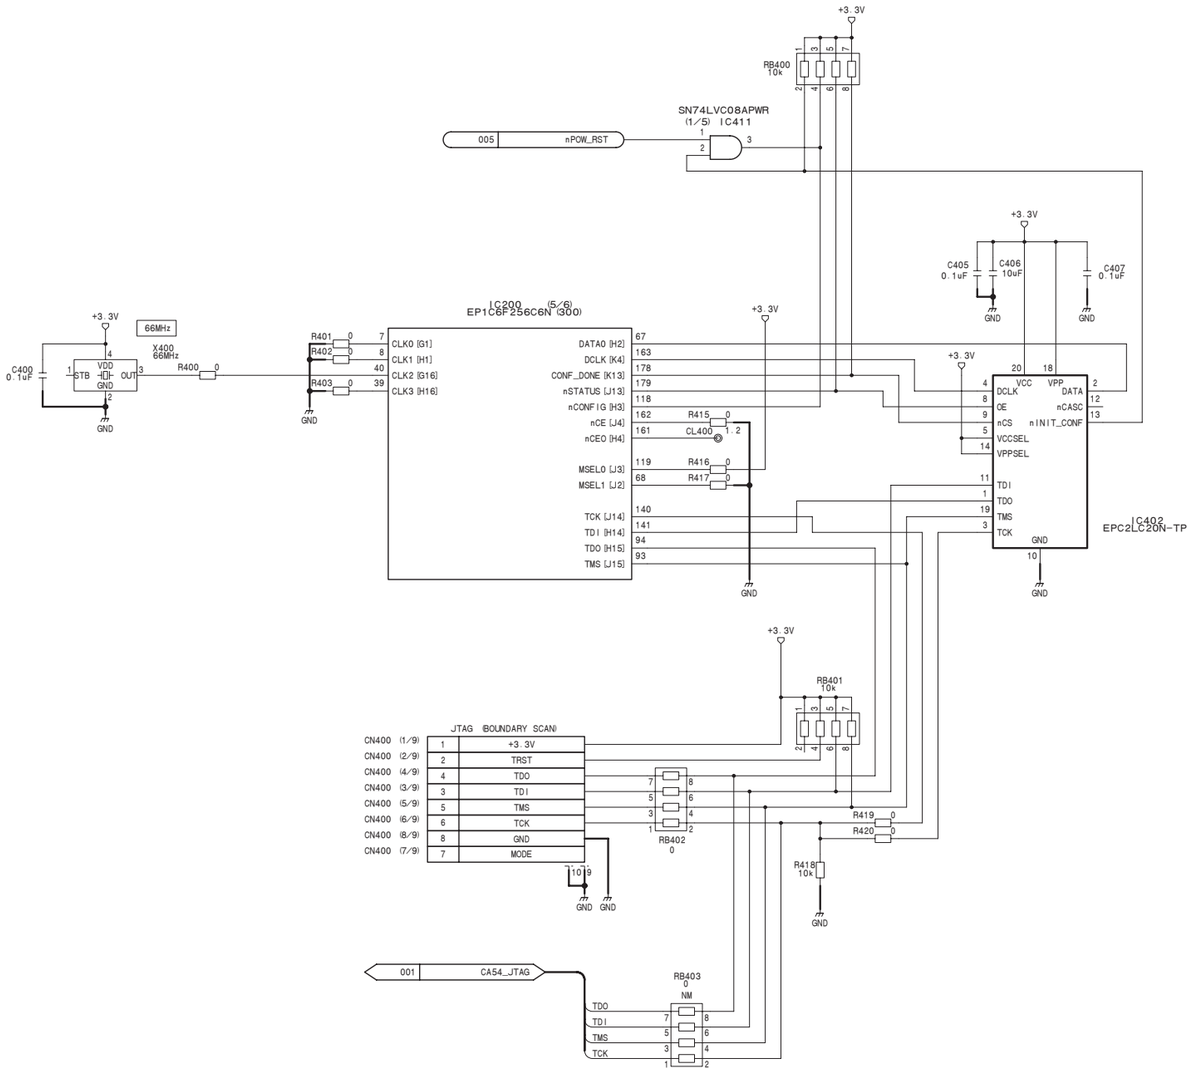

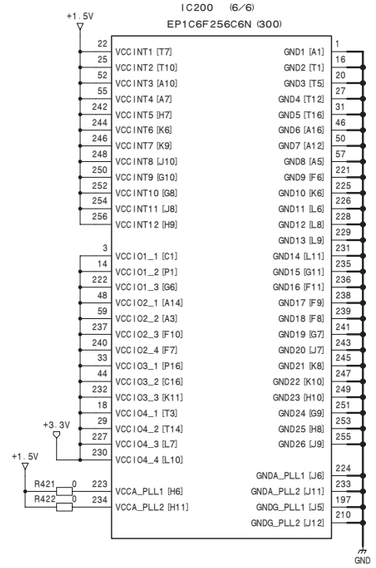



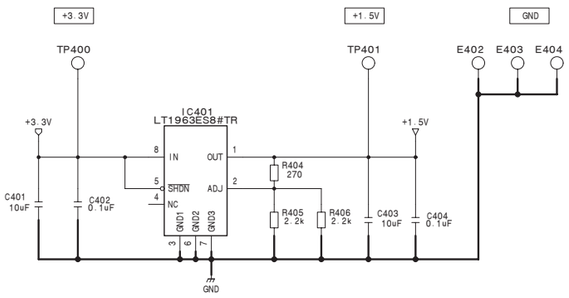



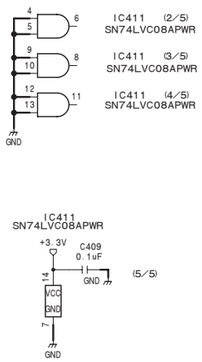

SIO-26A (4/5)

BOARD NO. 1-862-225-11

MVS-8000X_SIO-26A_001_4

SIO-26A (5/5)
SUFFIX: -11

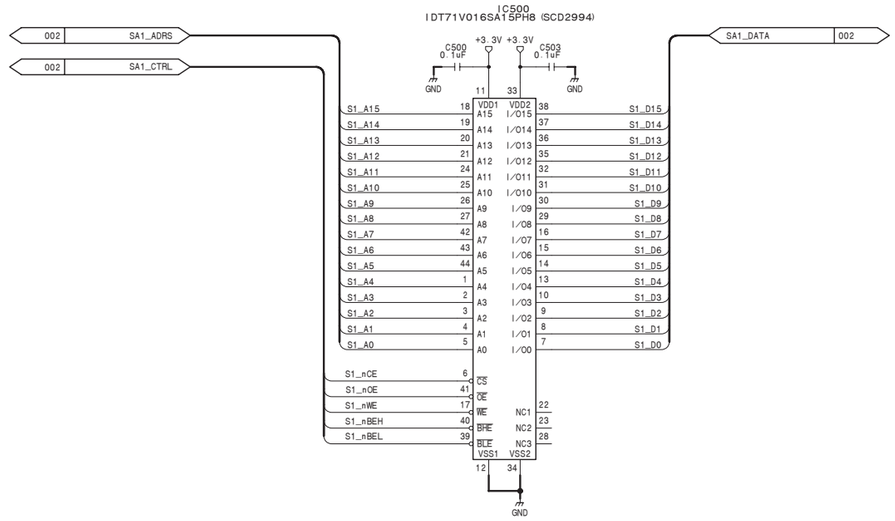

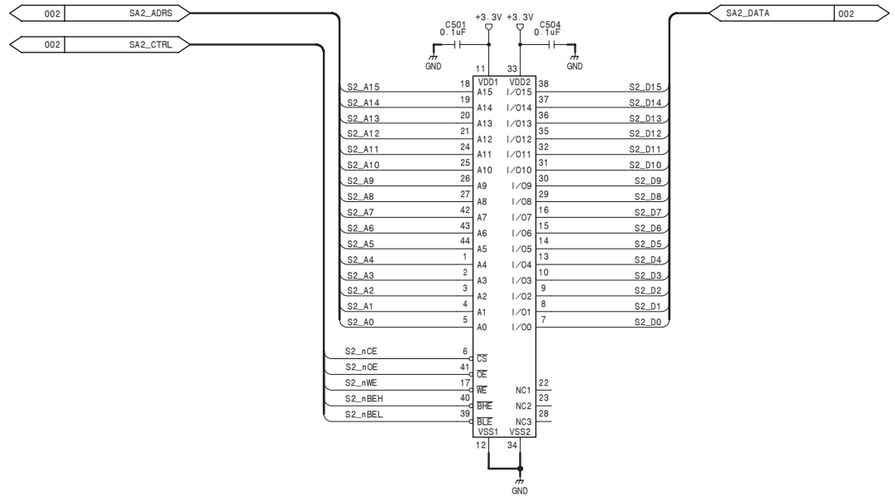

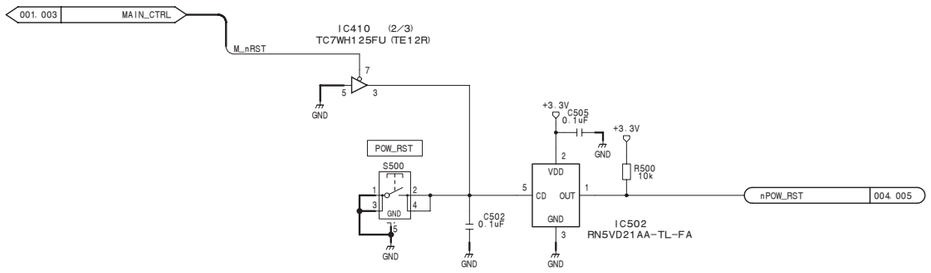

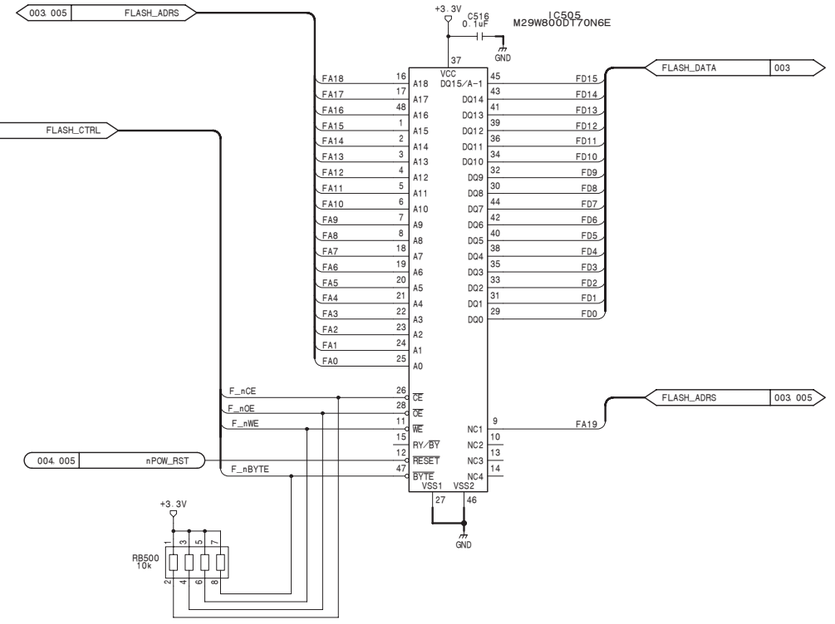

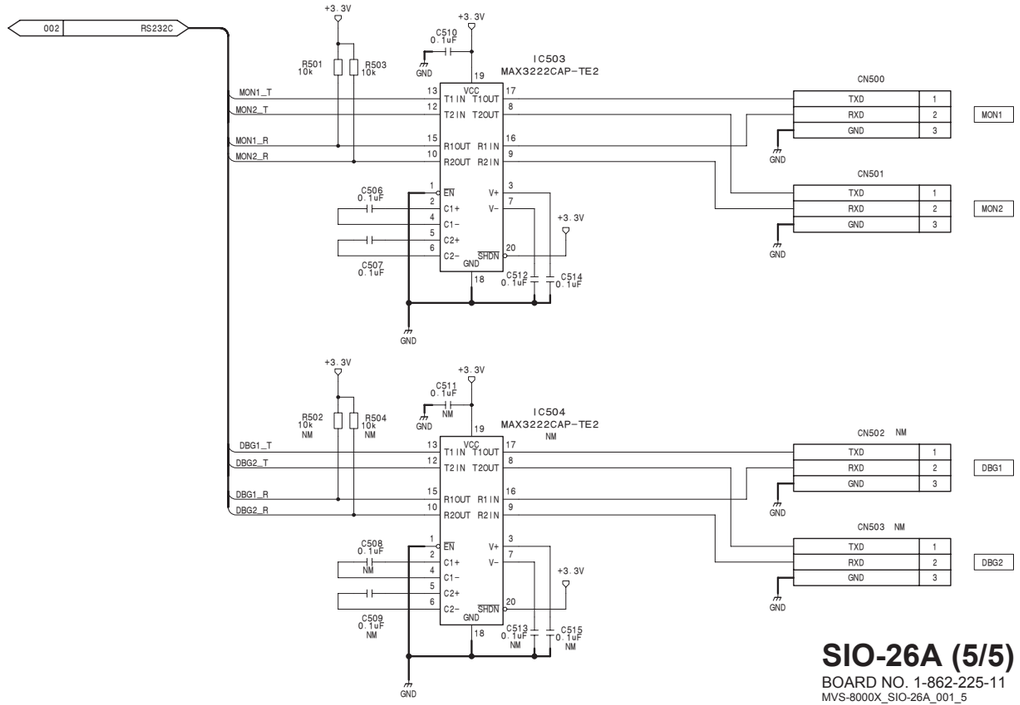

SIO-26A (5/5)
BOARD NO. 1-862-225-11
MVS-8000X_SIO-26A_001_5

XPT-31/31A (1/17)
SUFFIX: -13

Leftmost

CNB1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V
4												
5	RESET	DC_ENBL	GND	mX for CN1!	FUSE+12V	GND			GND			GND
6	GND	BD_EXT_SLF)	GND	CN1_I2C_SCL	CN1_I2C_SDA	GND	INET_TRX0P	INET_TRX0N	GND	INET_TRX1P	INET_TRX1N	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND	INET_TRX2P	INET_TRX2N	GND	INET_TRX3P	INET_TRX3N	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND			GND			GND
9	VCLKP	VCLKN	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND			GND			GND
10	FDP	FDN	GND	VDP	VDN	GND			GND			GND

CNC1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	ADRS1	ADRS2	GND	ADRS3	ADRS4	GND	CLK0p	CLK0n	GND	CSA0n	CSB0n	GND
2	ADRS5	ADRS6	GND	ADRS7	ADRS8	GND	CLK1p	CLK1n	GND	CSA1n	CSB1n	GND
3	ADRS9	ADRS10	GND	ADRS11	ADRS12	GND	CLK2p	CLK2n	GND	CSA2n	CSB2n	GND
4	ADRS13	ADRS14	GND	ADRS15	ADRS16	GND	CLK3p	CLK3n	GND	CSA3n	CSB3n	GND
5	DATA0	DATA1	GND	DATA2	DATA3	GND	CLK4p	CLK4n	GND	CSA4n	CSB4n	GND
6	DATA4	DATA5	GND	DATA6	DATA7	GND	CLK5p	CLK5n	GND	CSA5n	CSB5n	GND
7	DATA8	DATA9	GND	DATA10	DATA11	GND	WE0n	WE1n	GND	WAIT0n	WAIT1n	GND
8	DATA12	DATA13	GND	DATA14	DATA15	GND	WE2n	WE3n	GND	WAIT2n	WAIT3n	GND
9	CLK_INp	CLK_INn	GND	CSA_INn	CSB_INn	GND	WE4n	WE5n	GND	WAIT4n	WAIT5n	GND
10	WE_INn	WAIT_OUTn	GND	OE_INn	RESET_INn	GND	OEn	RESET0n	GND	RESET1n	RESET2n	GND

CND1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN001P	XPT_IN001N	GND	XPT_IN011P	XPT_IN011N	GND	XPT_IN021P	XPT_IN021N	GND	XPT_IN031P	XPT_IN031N	GND
2	XPT_IN002P	XPT_IN002N	GND	XPT_IN012P	XPT_IN012N	GND	XPT_IN022P	XPT_IN022N	GND	XPT_IN032P	XPT_IN032N	GND
3	XPT_IN003P	XPT_IN003N	GND	XPT_IN013P	XPT_IN013N	GND	XPT_IN023P	XPT_IN023N	GND	XPT_IN033P	XPT_IN033N	GND
4	XPT_IN004P	XPT_IN004N	GND	XPT_IN014P	XPT_IN014N	GND	XPT_IN024P	XPT_IN024N	GND	XPT_IN034P	XPT_IN034N	GND
5	XPT_IN005P	XPT_IN005N	GND	XPT_IN015P	XPT_IN015N	GND	XPT_IN025P	XPT_IN025N	GND	XPT_IN035P	XPT_IN035N	GND
6	XPT_IN006P	XPT_IN006N	GND	XPT_IN016P	XPT_IN016N	GND	XPT_IN026P	XPT_IN026N	GND	XPT_IN036P	XPT_IN036N	GND
7	XPT_IN007P	XPT_IN007N	GND	XPT_IN017P	XPT_IN017N	GND	XPT_IN027P	XPT_IN027N	GND	XPT_IN037P	XPT_IN037N	GND
8	XPT_IN008P	XPT_IN008N	GND	XPT_IN018P	XPT_IN018N	GND	XPT_IN028P	XPT_IN028N	GND	XPT_IN038P	XPT_IN038N	GND
9	XPT_IN009P	XPT_IN009N	GND	XPT_IN019P	XPT_IN019N	GND	XPT_IN029P	XPT_IN029N	GND	XPT_IN039P	XPT_IN039N	GND
10	XPT_IN010P	XPT_IN010N	GND	XPT_IN020P	XPT_IN020N	GND	XPT_IN030P	XPT_IN030N	GND	XPT_IN040P	XPT_IN040N	GND

CNE1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN041P	XPT_IN041N	GND	XPT_IN051P	XPT_IN051N	GND	XPT_IN061P	XPT_IN061N	GND	XPT_IN071P	XPT_IN071N	GND
2	XPT_IN042P	XPT_IN042N	GND	XPT_IN052P	XPT_IN052N	GND	XPT_IN062P	XPT_IN062N	GND	XPT_IN072P	XPT_IN072N	GND
3	XPT_IN043P	XPT_IN043N	GND	XPT_IN053P	XPT_IN053N	GND	XPT_IN063P	XPT_IN063N	GND	XPT_IN073P	XPT_IN073N	GND
4	XPT_IN044P	XPT_IN044N	GND	XPT_IN054P	XPT_IN054N	GND	XPT_IN064P	XPT_IN064N	GND	XPT_IN074P	XPT_IN074N	GND
5	XPT_IN045P	XPT_IN045N	GND	XPT_IN055P	XPT_IN055N	GND	XPT_IN065P	XPT_IN065N	GND	XPT_IN075P	XPT_IN075N	GND
6	XPT_IN046P	XPT_IN046N	GND	XPT_IN056P	XPT_IN056N	GND	XPT_IN066P	XPT_IN066N	GND	XPT_IN076P	XPT_IN076N	GND
7	XPT_IN047P	XPT_IN047N	GND	XPT_IN057P	XPT_IN057N	GND	XPT_IN067P	XPT_IN067N	GND	XPT_IN077P	XPT_IN077N	GND
8	XPT_IN048P	XPT_IN048N	GND	XPT_IN058P	XPT_IN058N	GND	XPT_IN068P	XPT_IN068N	GND	XPT_IN078P	XPT_IN078N	GND
9	XPT_IN049P	XPT_IN049N	GND	XPT_IN059P	XPT_IN059N	GND	XPT_IN069P	XPT_IN069N	GND	XPT_IN079P	XPT_IN079N	GND
10	XPT_IN050P	XPT_IN050N	GND	XPT_IN060P	XPT_IN060N	GND	XPT_IN070P	XPT_IN070N	GND	XPT_IN080P	XPT_IN080N	GND

CNG1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT001P	XPT_OUT001N	GND	XPT_OUT011P	XPT_OUT011N	GND	XPT_OUT021P	XPT_OUT021N	GND	XPT_OUT031P	XPT_OUT031N	GND
2	XPT_OUT002P	XPT_OUT002N	GND	XPT_OUT012P	XPT_OUT012N	GND	XPT_OUT022P	XPT_OUT022N	GND	XPT_OUT032P	XPT_OUT032N	GND
3	XPT_OUT003P	XPT_OUT003N	GND	XPT_OUT013P	XPT_OUT013N	GND	XPT_OUT023P	XPT_OUT023N	GND	XPT_OUT033P	XPT_OUT033N	GND
4	XPT_OUT004P	XPT_OUT004N	GND	XPT_OUT014P	XPT_OUT014N	GND	XPT_OUT024P	XPT_OUT024N	GND	XPT_OUT034P	XPT_OUT034N	GND
5	XPT_OUT005P	XPT_OUT005N	GND	XPT_OUT015P	XPT_OUT015N	GND	XPT_OUT025P	XPT_OUT025N	GND	XPT_OUT035P	XPT_OUT035N	GND
6	XPT_OUT006P	XPT_OUT006N	GND	XPT_OUT016P	XPT_OUT016N	GND	XPT_OUT026P	XPT_OUT026N	GND	XPT_OUT036P	XPT_OUT036N	GND
7	XPT_OUT007P	XPT_OUT007N	GND	XPT_OUT017P	XPT_OUT017N	GND	XPT_OUT027P	XPT_OUT027N	GND	XPT_OUT037P	XPT_OUT037N	GND
8	XPT_OUT008P	XPT_OUT008N	GND	XPT_OUT018P	XPT_OUT018N	GND	XPT_OUT028P	XPT_OUT028N	GND	XPT_OUT038P	XPT_OUT038N	GND
9	XPT_OUT009P	XPT_OUT009N	GND	XPT_OUT019P	XPT_OUT019N	GND	XPT_OUT029P	XPT_OUT029N	GND	XPT_OUT039P	XPT_OUT039N	GND
10	XPT_OUT010P	XPT_OUT010N	GND	XPT_OUT020P	XPT_OUT020N	GND	XPT_OUT030P	XPT_OUT030N	GND	XPT_OUT040P	XPT_OUT040N	GND

CNJ1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT041P	XPT_OUT041N	GND	XPT_OUT051P	XPT_OUT051N	GND	XPT_OUT061P	XPT_OUT061N	GND	XPT_OUT071P	XPT_OUT071N	GND
2	XPT_OUT042P	XPT_OUT042N	GND	XPT_OUT052P	XPT_OUT052N	GND	XPT_OUT062P	XPT_OUT062N	GND	XPT_OUT072P	XPT_OUT072N	GND
3	XPT_OUT043P	XPT_OUT043N	GND	XPT_OUT053P	XPT_OUT053N	GND	XPT_OUT063P	XPT_OUT063N	GND	XPT_OUT073P	XPT_OUT073N	GND
4	XPT_OUT044P	XPT_OUT044N	GND	XPT_OUT054P	XPT_OUT054N	GND	XPT_OUT064P	XPT_OUT064N	GND	XPT_OUT074P	XPT_OUT074N	GND
5	XPT_OUT045P	XPT_OUT045N	GND	XPT_OUT055P	XPT_OUT055N	GND	XPT_OUT065P	XPT_OUT065N	GND	XPT_OUT075P	XPT_OUT075N	GND
6	XPT_OUT046P	XPT_OUT046N	GND	XPT_OUT056P	XPT_OUT056N	GND	XPT_OUT066P	XPT_OUT066N	GND	XPT_OUT076P	XPT_OUT076N	GND
7	XPT_OUT047P	XPT_OUT047N	GND	XPT_OUT057P	XPT_OUT057N	GND	XPT_OUT067P	XPT_OUT067N	GND	XPT_OUT077P	XPT_OUT077N	GND
8	XPT_OUT048P	XPT_OUT048N	GND	XPT_OUT058P	XPT_OUT058N	GND	XPT_OUT068P	XPT_OUT068N	GND	XPT_OUT078P	XPT_OUT078N	GND
9	XPT_OUT049P	XPT_OUT049N	GND	XPT_OUT059P	XPT_OUT059N	GND	XPT_OUT069P	XPT_OUT069N	GND	XPT_OUT079P	XPT_OUT079N	GND
10	XPT_OUT050P	XPT_OUT050N	GND	XPT_OUT060P	XPT_OUT060N	GND	XPT_OUT070P	XPT_OUT070N	GND	XPT_OUT080P	XPT_OUT080N	GND

CNK1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN081P	XPT_IN081N	GND	XPT_IN091P	XPT_IN091N	GND	XPT_IN101P	XPT_IN101N	GND	XPT_IN111P	XPT_IN111N	GND
2	XPT_IN082P	XPT_IN082N	GND	XPT_IN092P	XPT_IN092N	GND	XPT_IN102P	XPT_IN102N	GND	XPT_IN112P	XPT_IN112N	GND
3	XPT_IN083P	XPT_IN083N	GND	XPT_IN093P	XPT_IN093N	GND	XPT_IN103P	XPT_IN103N	GND	XPT_IN113P	XPT_IN113N	GND
4	XPT_IN084P	XPT_IN084N	GND	XPT_IN094P	XPT_IN094N	GND	XPT_IN104P	XPT_IN104N	GND	XPT_IN114P	XPT_IN114N	GND
5	XPT_IN085P	XPT_IN085N	GND	XPT_IN095P	XPT_IN095N	GND	XPT_IN105P	XPT_IN105N	GND	XPT_IN115P	XPT_IN115N	GND
6	XPT_IN086P	XPT_IN086N	GND	XPT_IN096P	XPT_IN096N	GND	XPT_IN106P	XPT_IN106N	GND	XPT_IN116P	XPT_IN116N	GND
7	XPT_IN087P	XPT_IN087N	GND	XPT_IN097P	XPT_IN097N	GND	XPT_IN107P	XPT_IN107N	GND	XPT_IN117P	XPT_IN117N	GND
8	XPT_IN088P	XPT_IN088N	GND	XPT_IN098P	XPT_IN098N	GND	XPT_IN108P	XPT_IN108N	GND	XPT_IN118P	XPT_IN118N	GND
9	XPT_IN089P	XPT_IN089N	GND	XPT_IN099P	XPT_IN099N	GND	XPT_IN109P	XPT_IN109N	GND	XPT_IN119P	XPT_IN119N	GND
10	XPT_IN090P	XPT_IN090N	GND	XPT_IN100P	XPT_IN100N	GND	XPT_IN110P	XPT_IN110N	GND	XPT_IN120P	XPT_IN120N	GND

CNL1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN121P	XPT_IN121N	GND	XPT_IN131P	XPT_IN131N	GND	XPT_IN141P	XPT_IN141N	GND	XPT_IN151P	XPT_IN151N	GND
2	XPT_IN122P	XPT_IN122N	GND	XPT_IN132P	XPT_IN132N	GND	XPT_IN142P	XPT_IN142N	GND	XPT_IN152P	XPT_IN152N	GND
3	XPT_IN123P	XPT_IN123N	GND	XPT_IN133P	XPT_IN133N	GND	XPT_IN143P	XPT_IN143N	GND	XPT_IN153P	XPT_IN153N	GND
4	XPT_IN124P	XPT_IN124N	GND	XPT_IN134P	XPT_IN134N	GND	XPT_IN144P	XPT_IN144N	GND	XPT_IN154P	XPT_IN154N	GND
5	XPT_IN125P	XPT_IN125N	GND	XPT_IN135P	XPT_IN135N	GND	XPT_IN145P	XPT_IN145N	GND	XPT_IN155P	XPT_IN155N	GND
6	XPT_IN126P	XPT_IN126N	GND	XPT_IN136P	XPT_IN136N	GND	XPT_IN146P	XPT_IN146N	GND	XPT_IN156P	XPT_IN156N	GND
7	XPT_IN127P	XPT_IN127N	GND	XPT_IN137P	XPT_IN137N	GND	XPT_IN147P	XPT_IN147N	GND	XPT_IN157P	XPT_IN157N	GND
8	XPT_IN128P	XPT_IN128N	GND	XPT_IN138P	XPT_IN138N	GND	XPT_IN148P	XPT_IN148N	GND	XPT_IN158P	XPT_IN158N	GND
9	XPT_IN129P	XPT_IN129N	GND	XPT_IN139P	XPT_IN139N	GND	XPT_IN149P	XPT_IN149N	GND	XPT_IN159P	XPT_IN159N	GND
10	XPT_IN130P	XPT_IN130N	GND	XPT_IN140P	XPT_IN140N	GND	XPT_IN150P	XPT_IN150N	GND	XPT_IN160P	XPT_IN160N	GND

CNN1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT081P	XPT_OUT081N	GND	XPT_OUT091P	XPT_OUT091N	GND	XPT_OUT101P	XPT_OUT101N	GND	XPT_OUT111P	XPT_OUT111N	GND
2	XPT_OUT082P	XPT_OUT082N	GND	XPT_OUT092P	XPT_OUT092N	GND	XPT_OUT102P	XPT_OUT102N	GND	XPT_OUT112P	XPT_OUT112N	GND
3	XPT_OUT083P	XPT_OUT083N	GND	XPT_OUT093P	XPT_OUT093N	GND	XPT_OUT103P	XPT_OUT103N	GND	XPT_OUT113P	XPT_OUT113N	GND
4	XPT_OUT084P	XPT_OUT084N	GND	XPT_OUT094P	XPT_OUT094N	GND	XPT_OUT104P	XPT_OUT104N	GND	XPT_OUT114P	XPT_OUT114N	GND
5	XPT_OUT085P	XPT_OUT085N	GND	XPT_OUT095P	XPT_OUT095N	GND	XPT_OUT105P	XPT_OUT105N	GND	XPT_OUT115P	XPT_OUT115N	GND
6	XPT_OUT086P	XPT_OUT086N	GND	XPT_OUT096P	XPT_OUT096N	GND	XPT_OUT106P	XPT_OUT106N	GND	XPT_OUT116P	XPT_OUT116N	GND
7	XPT_OUT087P	XPT_OUT087N	GND	XPT_OUT097P	XPT_OUT097N	GND	XPT_OUT107P	XPT_OUT107N	GND	XPT_OUT117P	XPT_OUT117N	GND
8	XPT_OUT088P	XPT_OUT088N	GND	XPT_OUT098P	XPT_OUT098N	GND	XPT_OUT108P	XPT_OUT108N	GND	XPT_OUT118P	XPT_OUT118N	GND
9	XPT_OUT089P	XPT_OUT089N	GND	XPT_OUT099P	XPT_OUT099N	GND	XPT_OUT109P	XPT_OUT109N	GND	XPT_OUT119P	XPT_OUT119N	GND
10	XPT_OUT090P	XPT_OUT090N	GND	XPT_OUT100P	XPT_OUT100N	GND	XPT_OUT110P	XPT_OUT110N	GND	XPT_OUT120P	XPT_OUT120N	GND

CNP1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT121P	XPT_OUT121N	GND	XPT_OUT131P	XPT_OUT131N	GND	XPT_OUT141P	XPT_OUT141N	GND	XPT_OUT151P	XPT_OUT151N	GND
2	XPT_OUT122P	XPT_OUT122N	GND	XPT_OUT132P	XPT_OUT132N	GND	XPT_OUT142P	XPT_OUT142N	GND	XPT_OUT152P	XPT_OUT152N	GND
3	XPT_OUT123P	XPT_OUT123N	GND	XPT_OUT133P	XPT_OUT133N	GND	XPT_OUT143P	XPT_OUT143N	GND	XPT_OUT153P	XPT_OUT153N	GND
4	XPT_OUT124P	XPT_OUT124N	GND	XPT_OUT134P	XPT_OUT134N	GND	XPT_OUT144P	XPT_OUT144N	GND	XPT_OUT154P	XPT_OUT154N	GND
5	XPT_OUT125P	XPT_OUT125N	GND	XPT_OUT135P	XPT_OUT135N	GND	XPT_OUT145P	XPT_OUT145N	GND	XPT_OUT155P	XPT_OUT155N	GND
6	XPT_OUT126P	XPT_OUT126N	GND	XPT_OUT136P	XPT_OUT136N	GND	XPT_OUT146P	XPT_OUT146N	GND	XPT_OUT156P	XPT_OUT156N	GND
7	XPT_OUT127P	XPT_OUT127N	GND	XPT_OUT137P	XPT_OUT137N	GND	XPT_OUT147P	XPT_OUT147N	GND	XPT_OUT157P	XPT_OUT157N	GND
8	XPT_OUT128P	XPT_OUT128N	GND	XPT_OUT138P	XPT_OUT138N	GND	XPT_OUT148P	XPT_OUT148N	GND	XPT_OUT158P	XPT_OUT158N	GND
9	XPT_OUT129P	XPT_OUT129N	GND	XPT_OUT139P	XPT_OUT139N	GND	XPT_OUT149P	XPT_OUT149N	GND	XPT_OUT159P	XPT_OUT159N	GND
10	XPT_OUT130P	XPT_OUT130N	GND	XPT_OUT140P	XPT_OUT140N	GND	XPT_OUT150P	XPT_OUT150N	GND	XPT_OUT160P	XPT_OUT160N	GND

Rightmost

XPT-31/31A (1/17)
BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_1

XPT-31/31A (2/17)

SUFFIX: -13

XPT-31/31A (2/17)

SUFFIX: -13

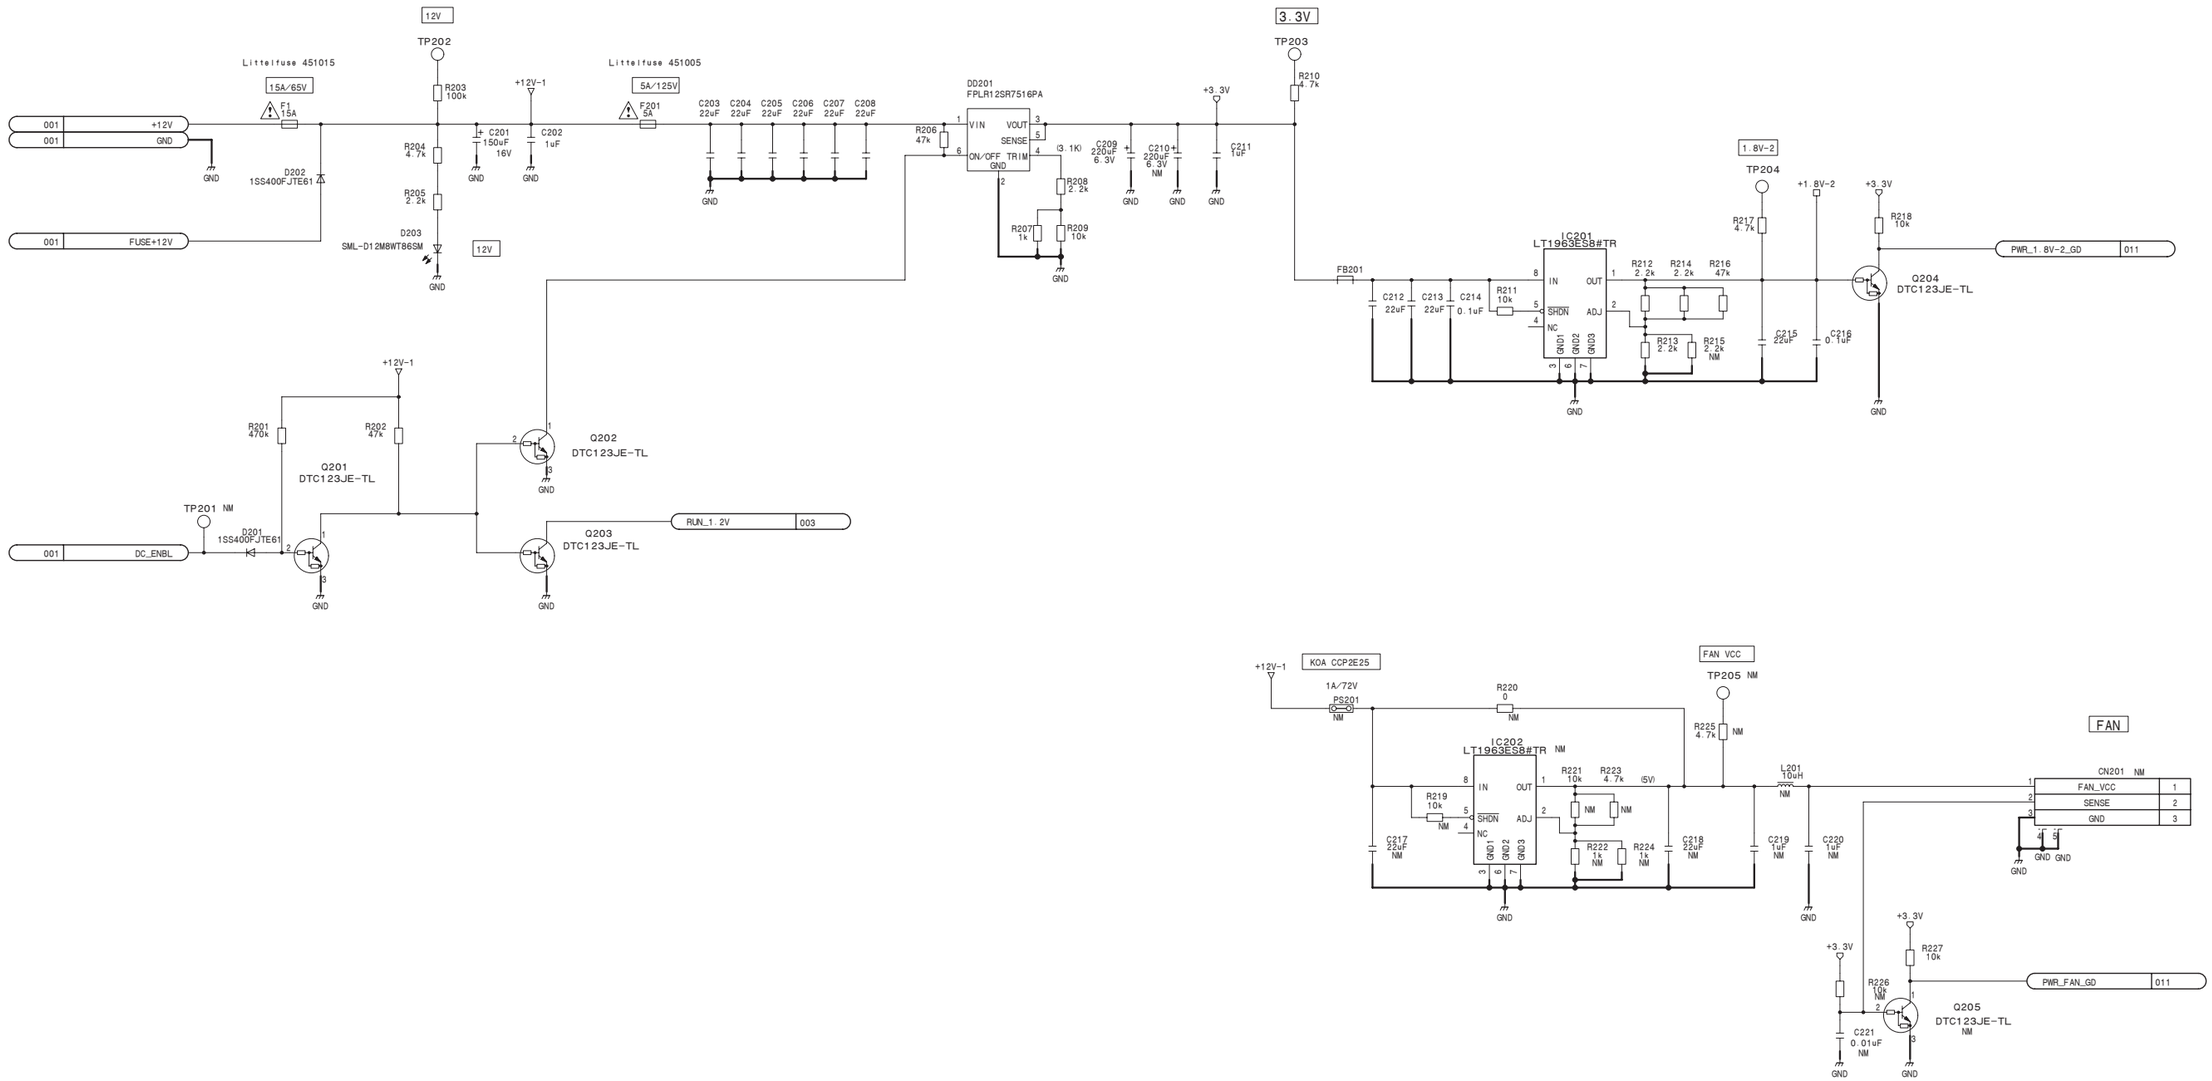



XPT-31/31A (2/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_2

XPT-31/31A (3/17)

SUFFIX: -13

XPT-31/31A (3/17)

SUFFIX: -13

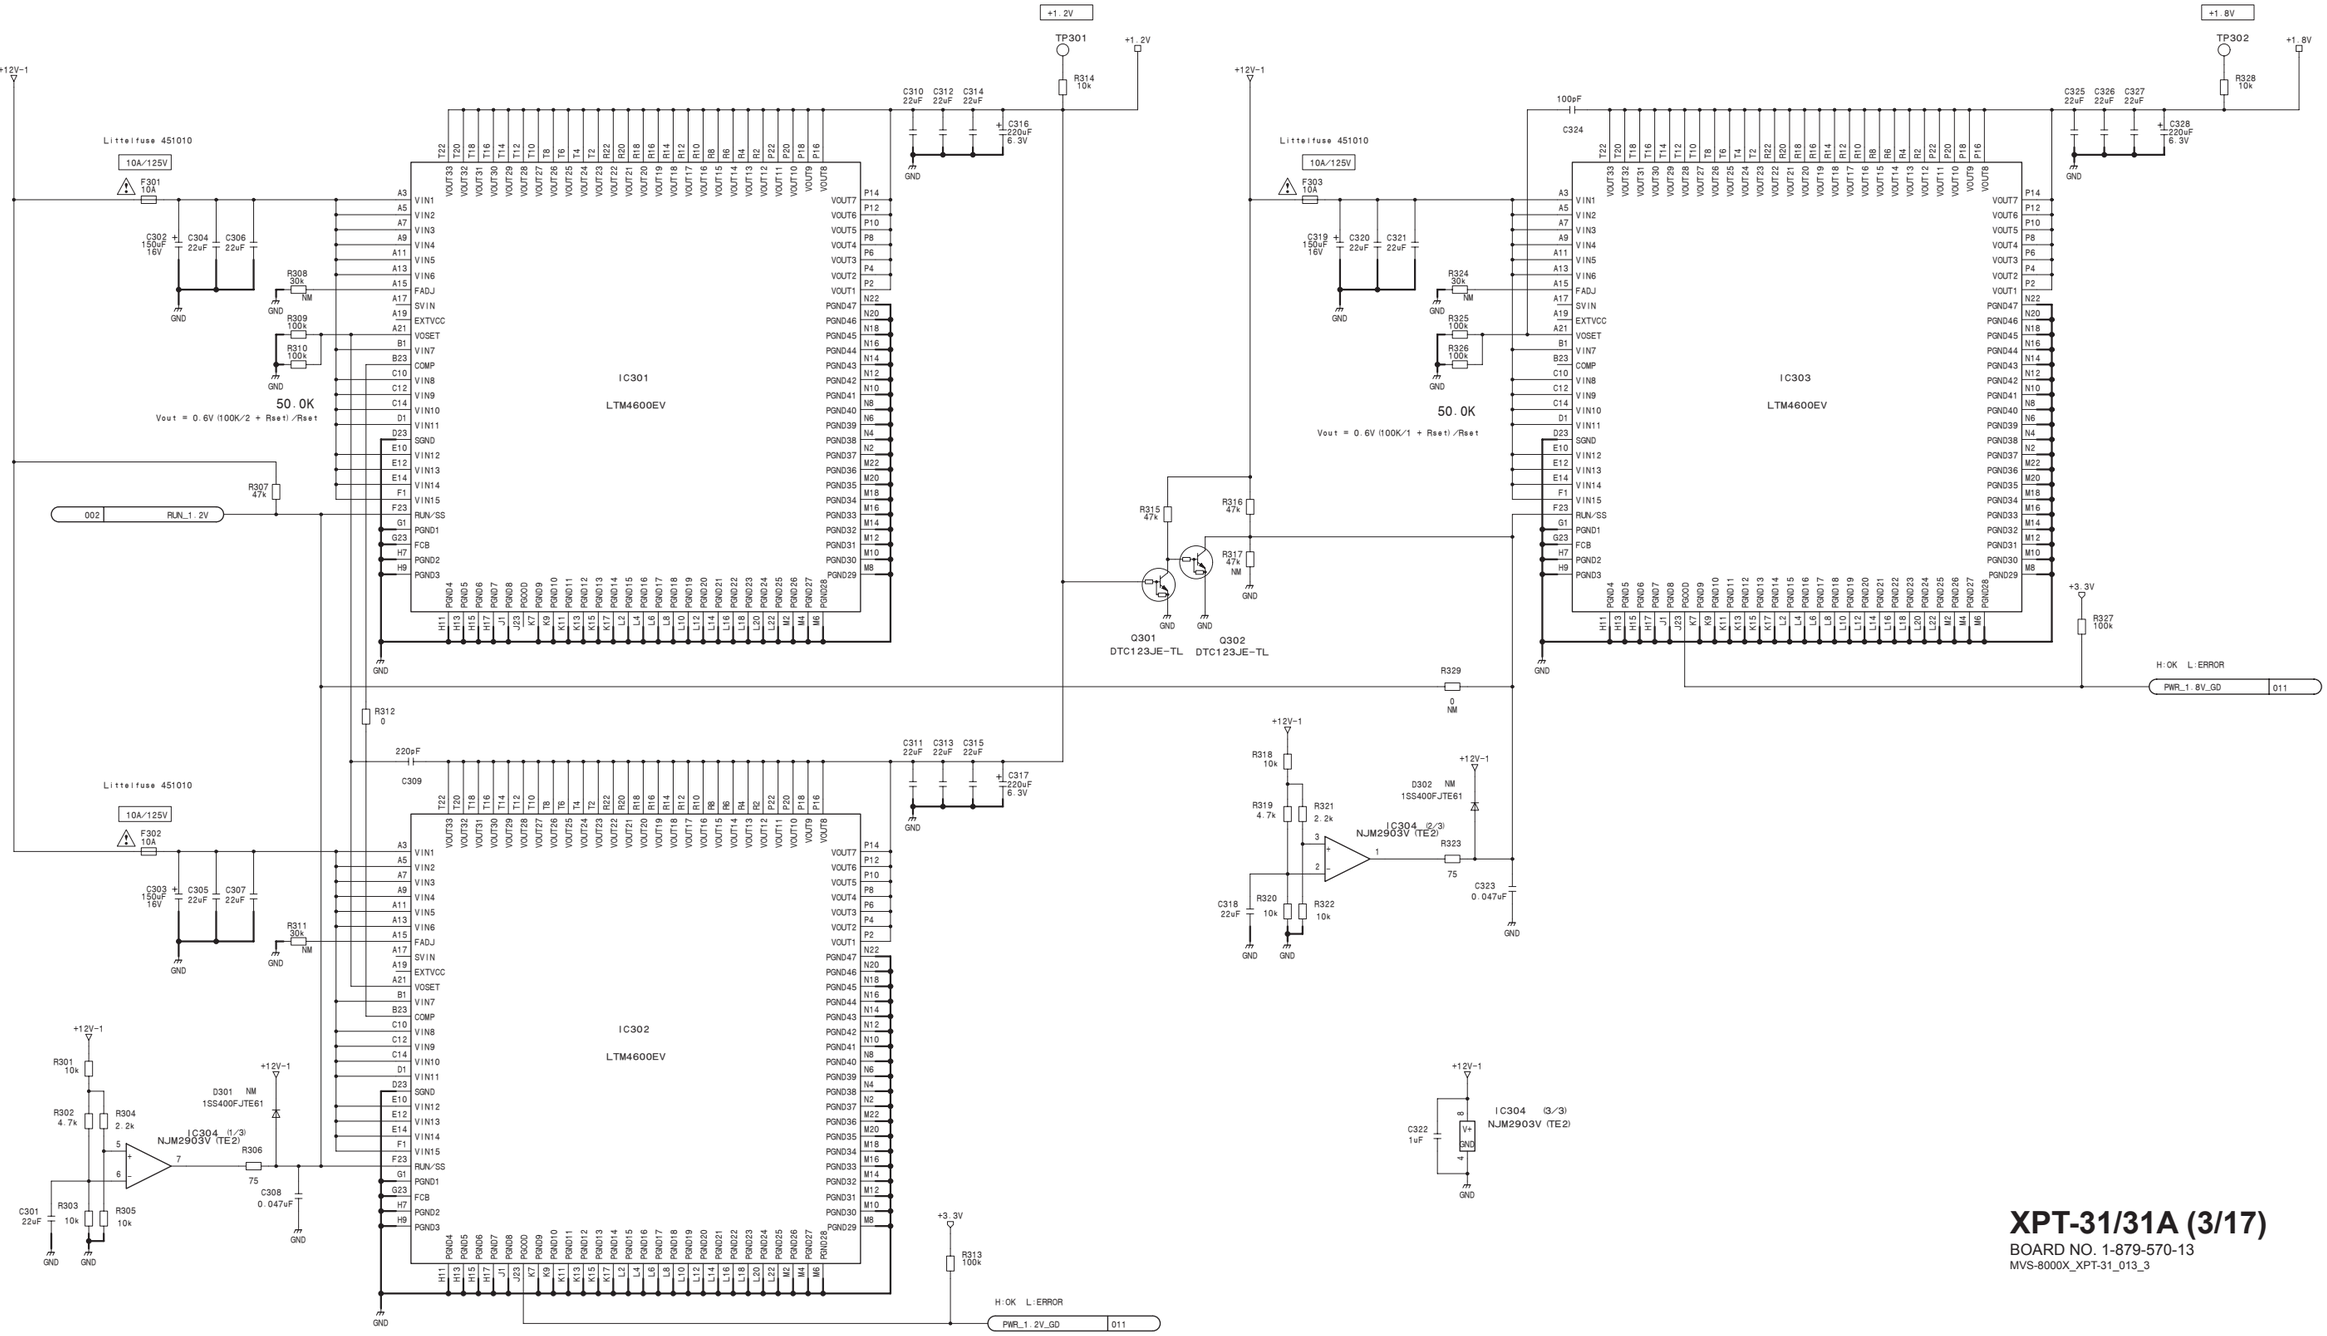

XPT-31/31A (3/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_3

XPT-31/31A (4/17)
SUFFIX: -13

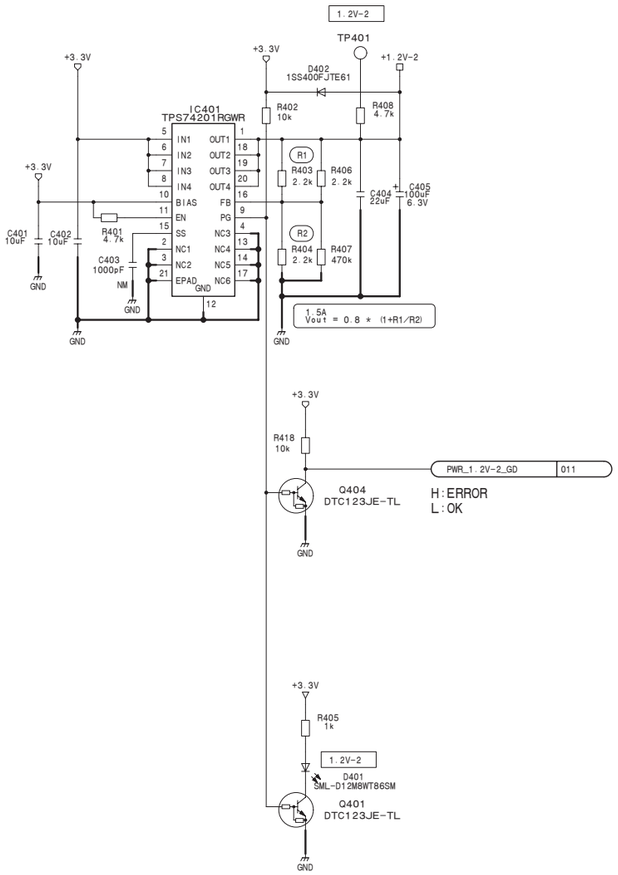

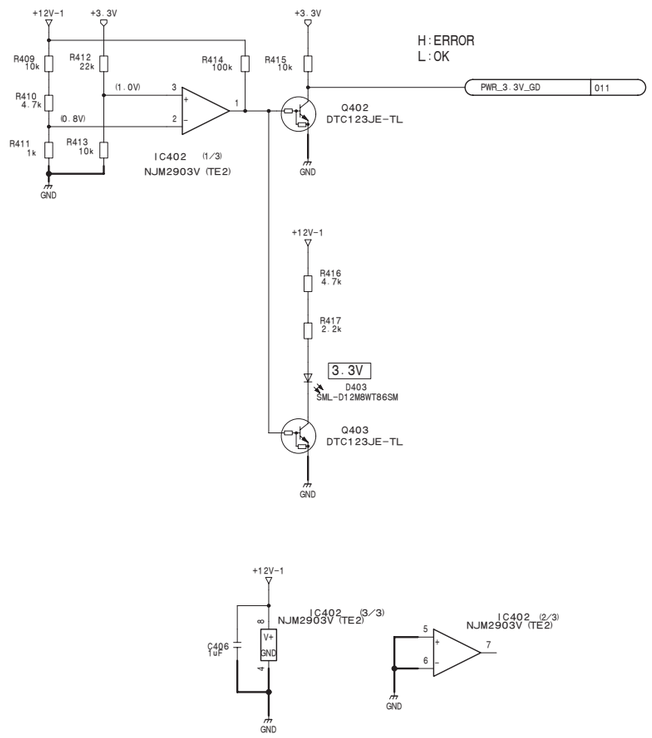

4-336

XPT-31/31A (5/17)

SUFFIX: -13

XPT-31/31A (5/17)

SUFFIX: -13

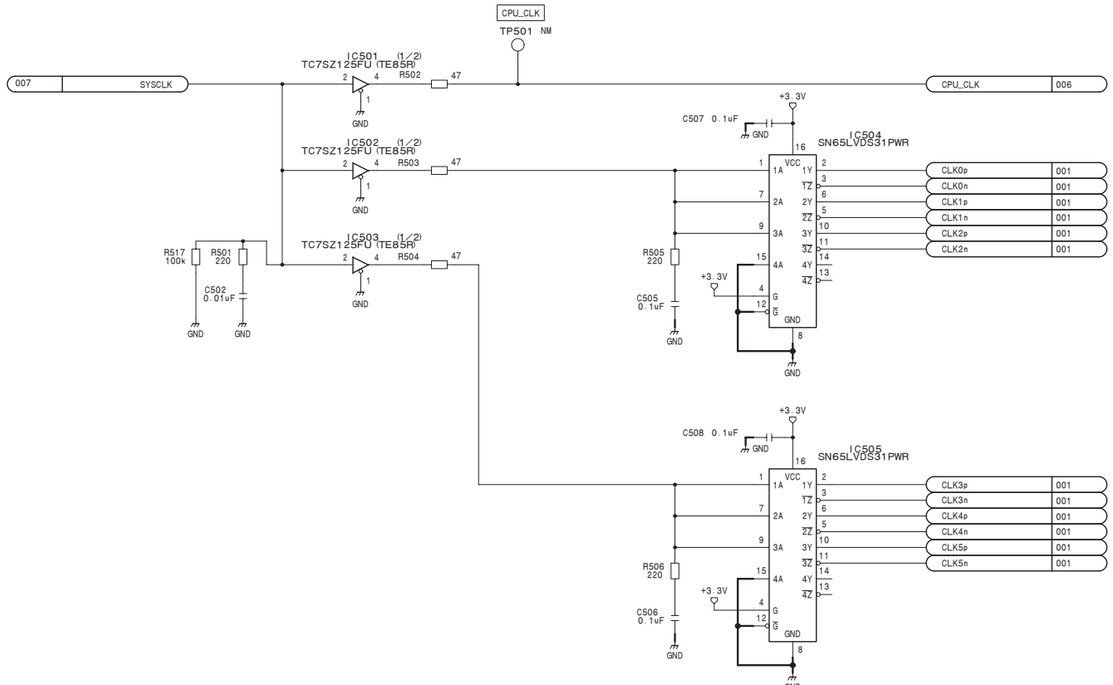

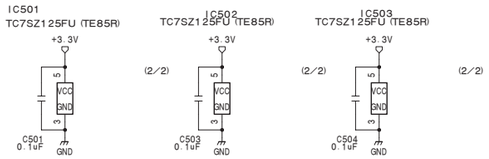

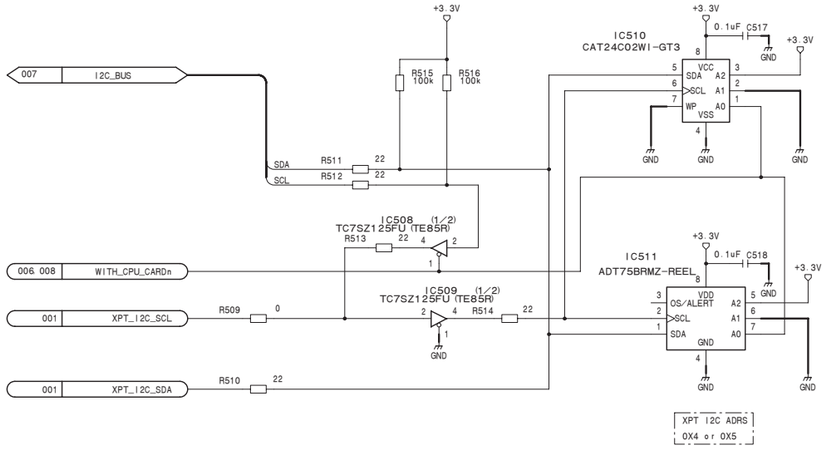

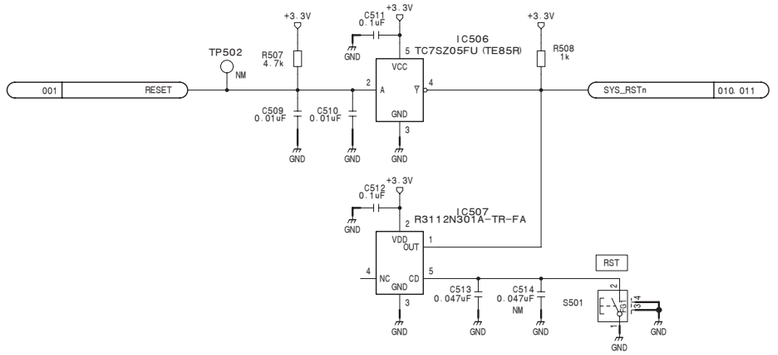

XPT-31/31A (5/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_5

XPT-31/31A (6/17) SUFFIX: -13

DEV CTL

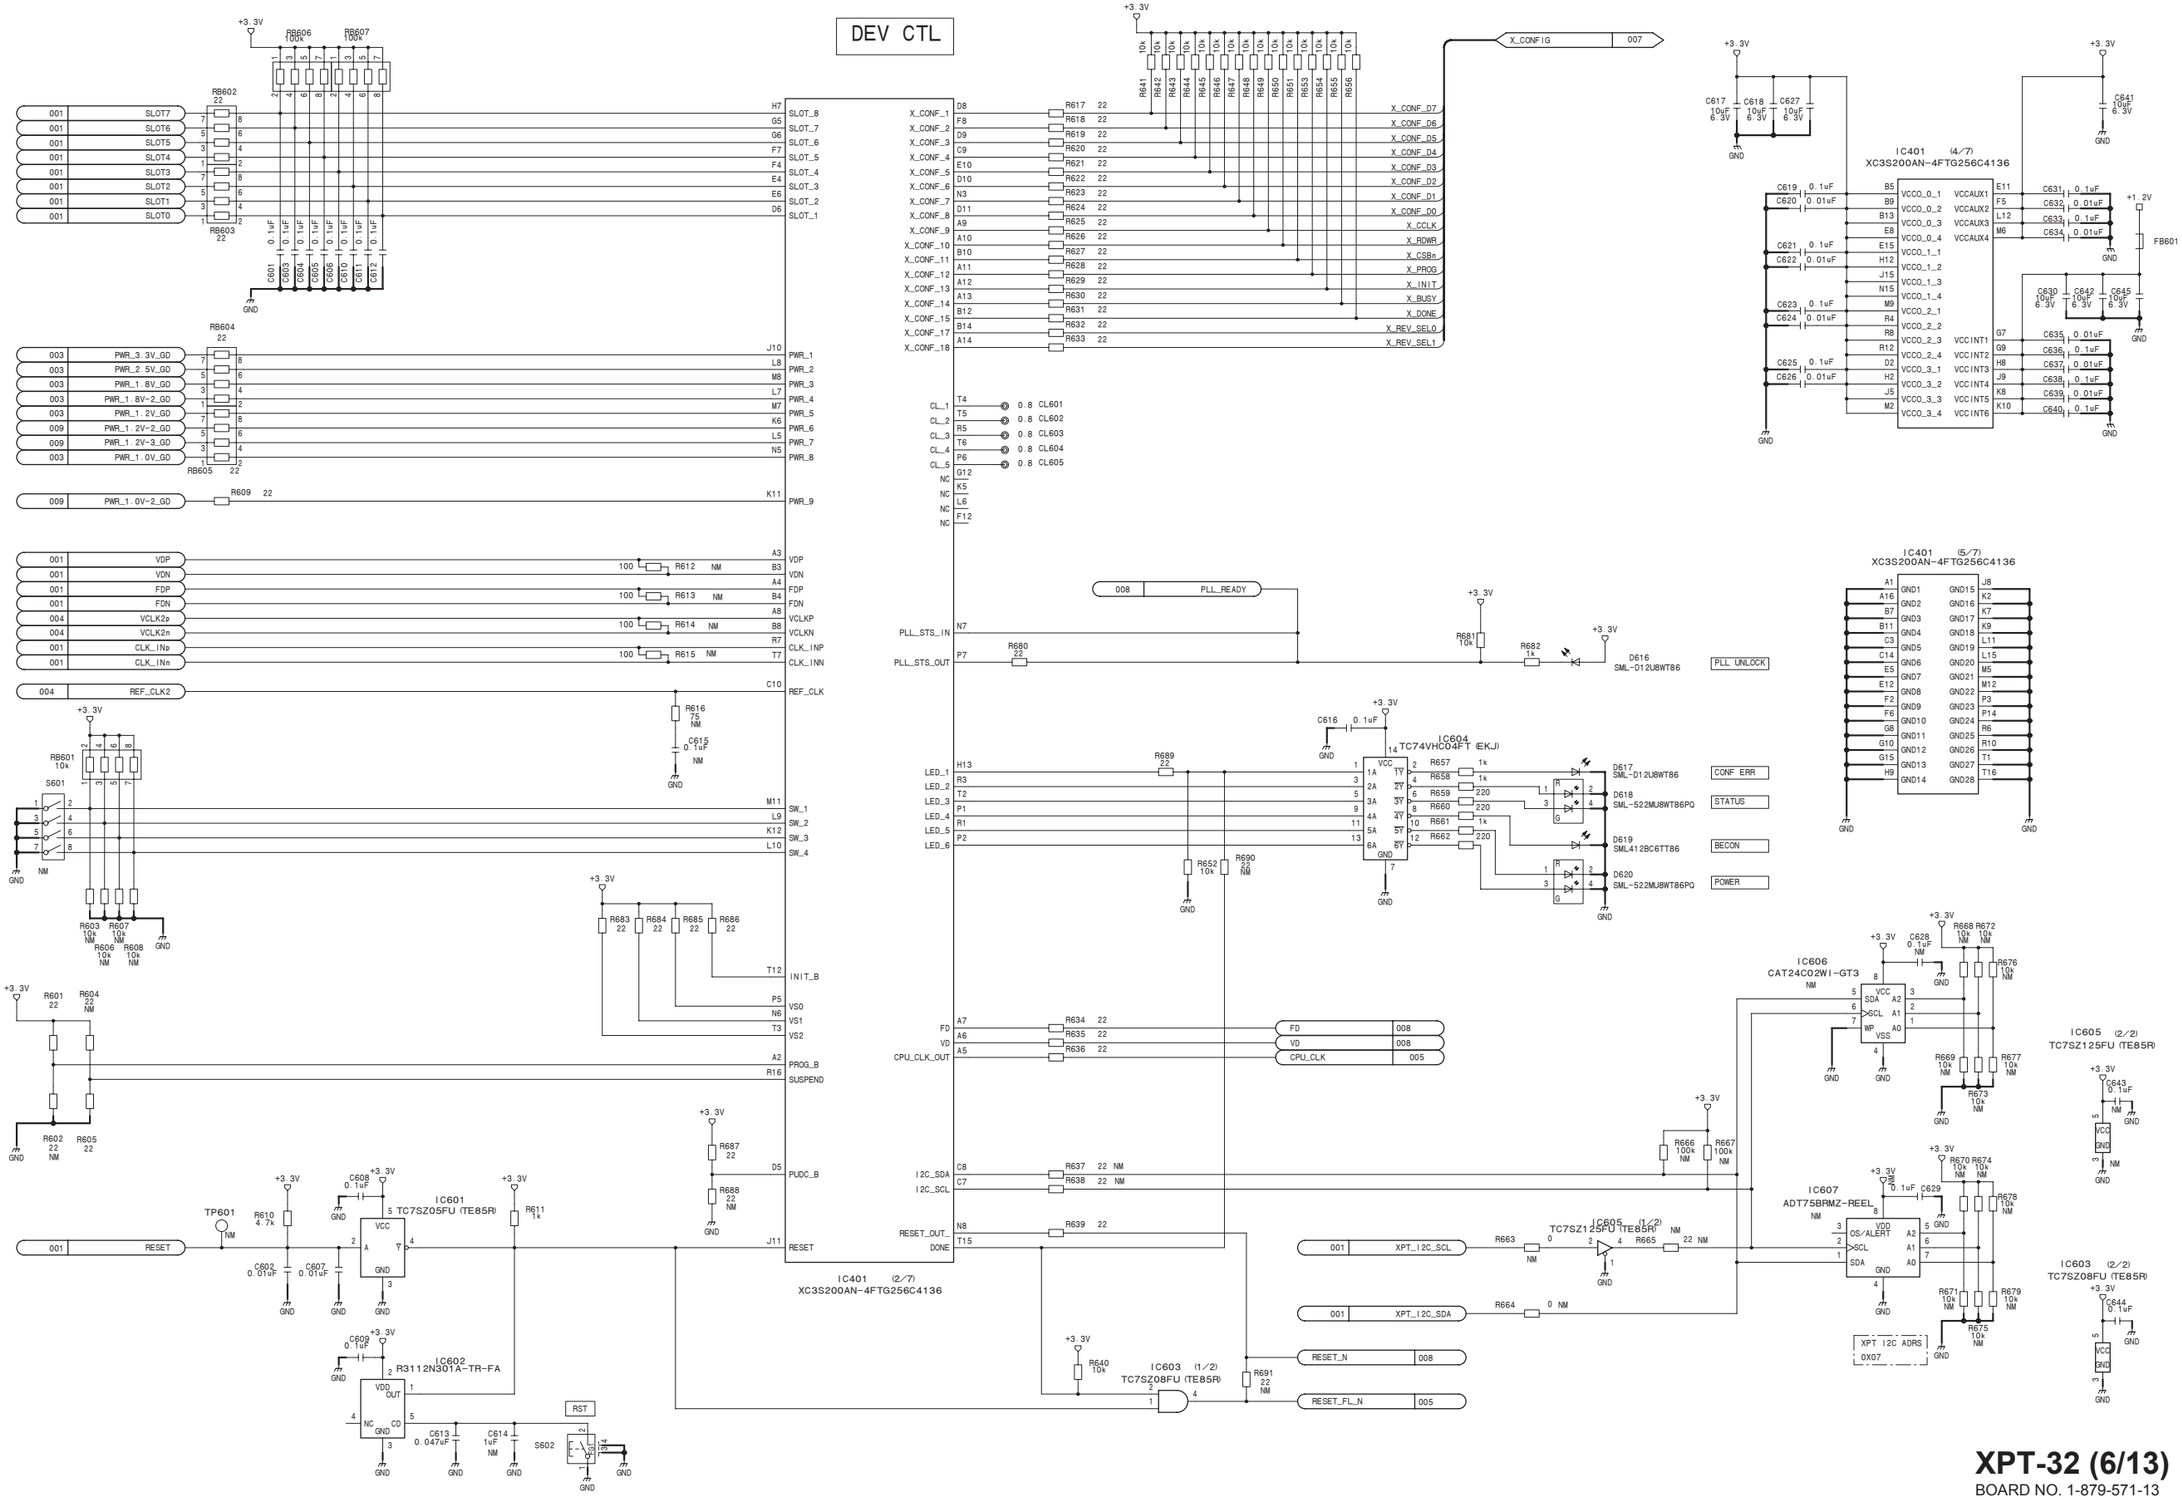

4-338

XPT-32 (6/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_6

XPT-31/31A (7/17)
SUFFIX: -13

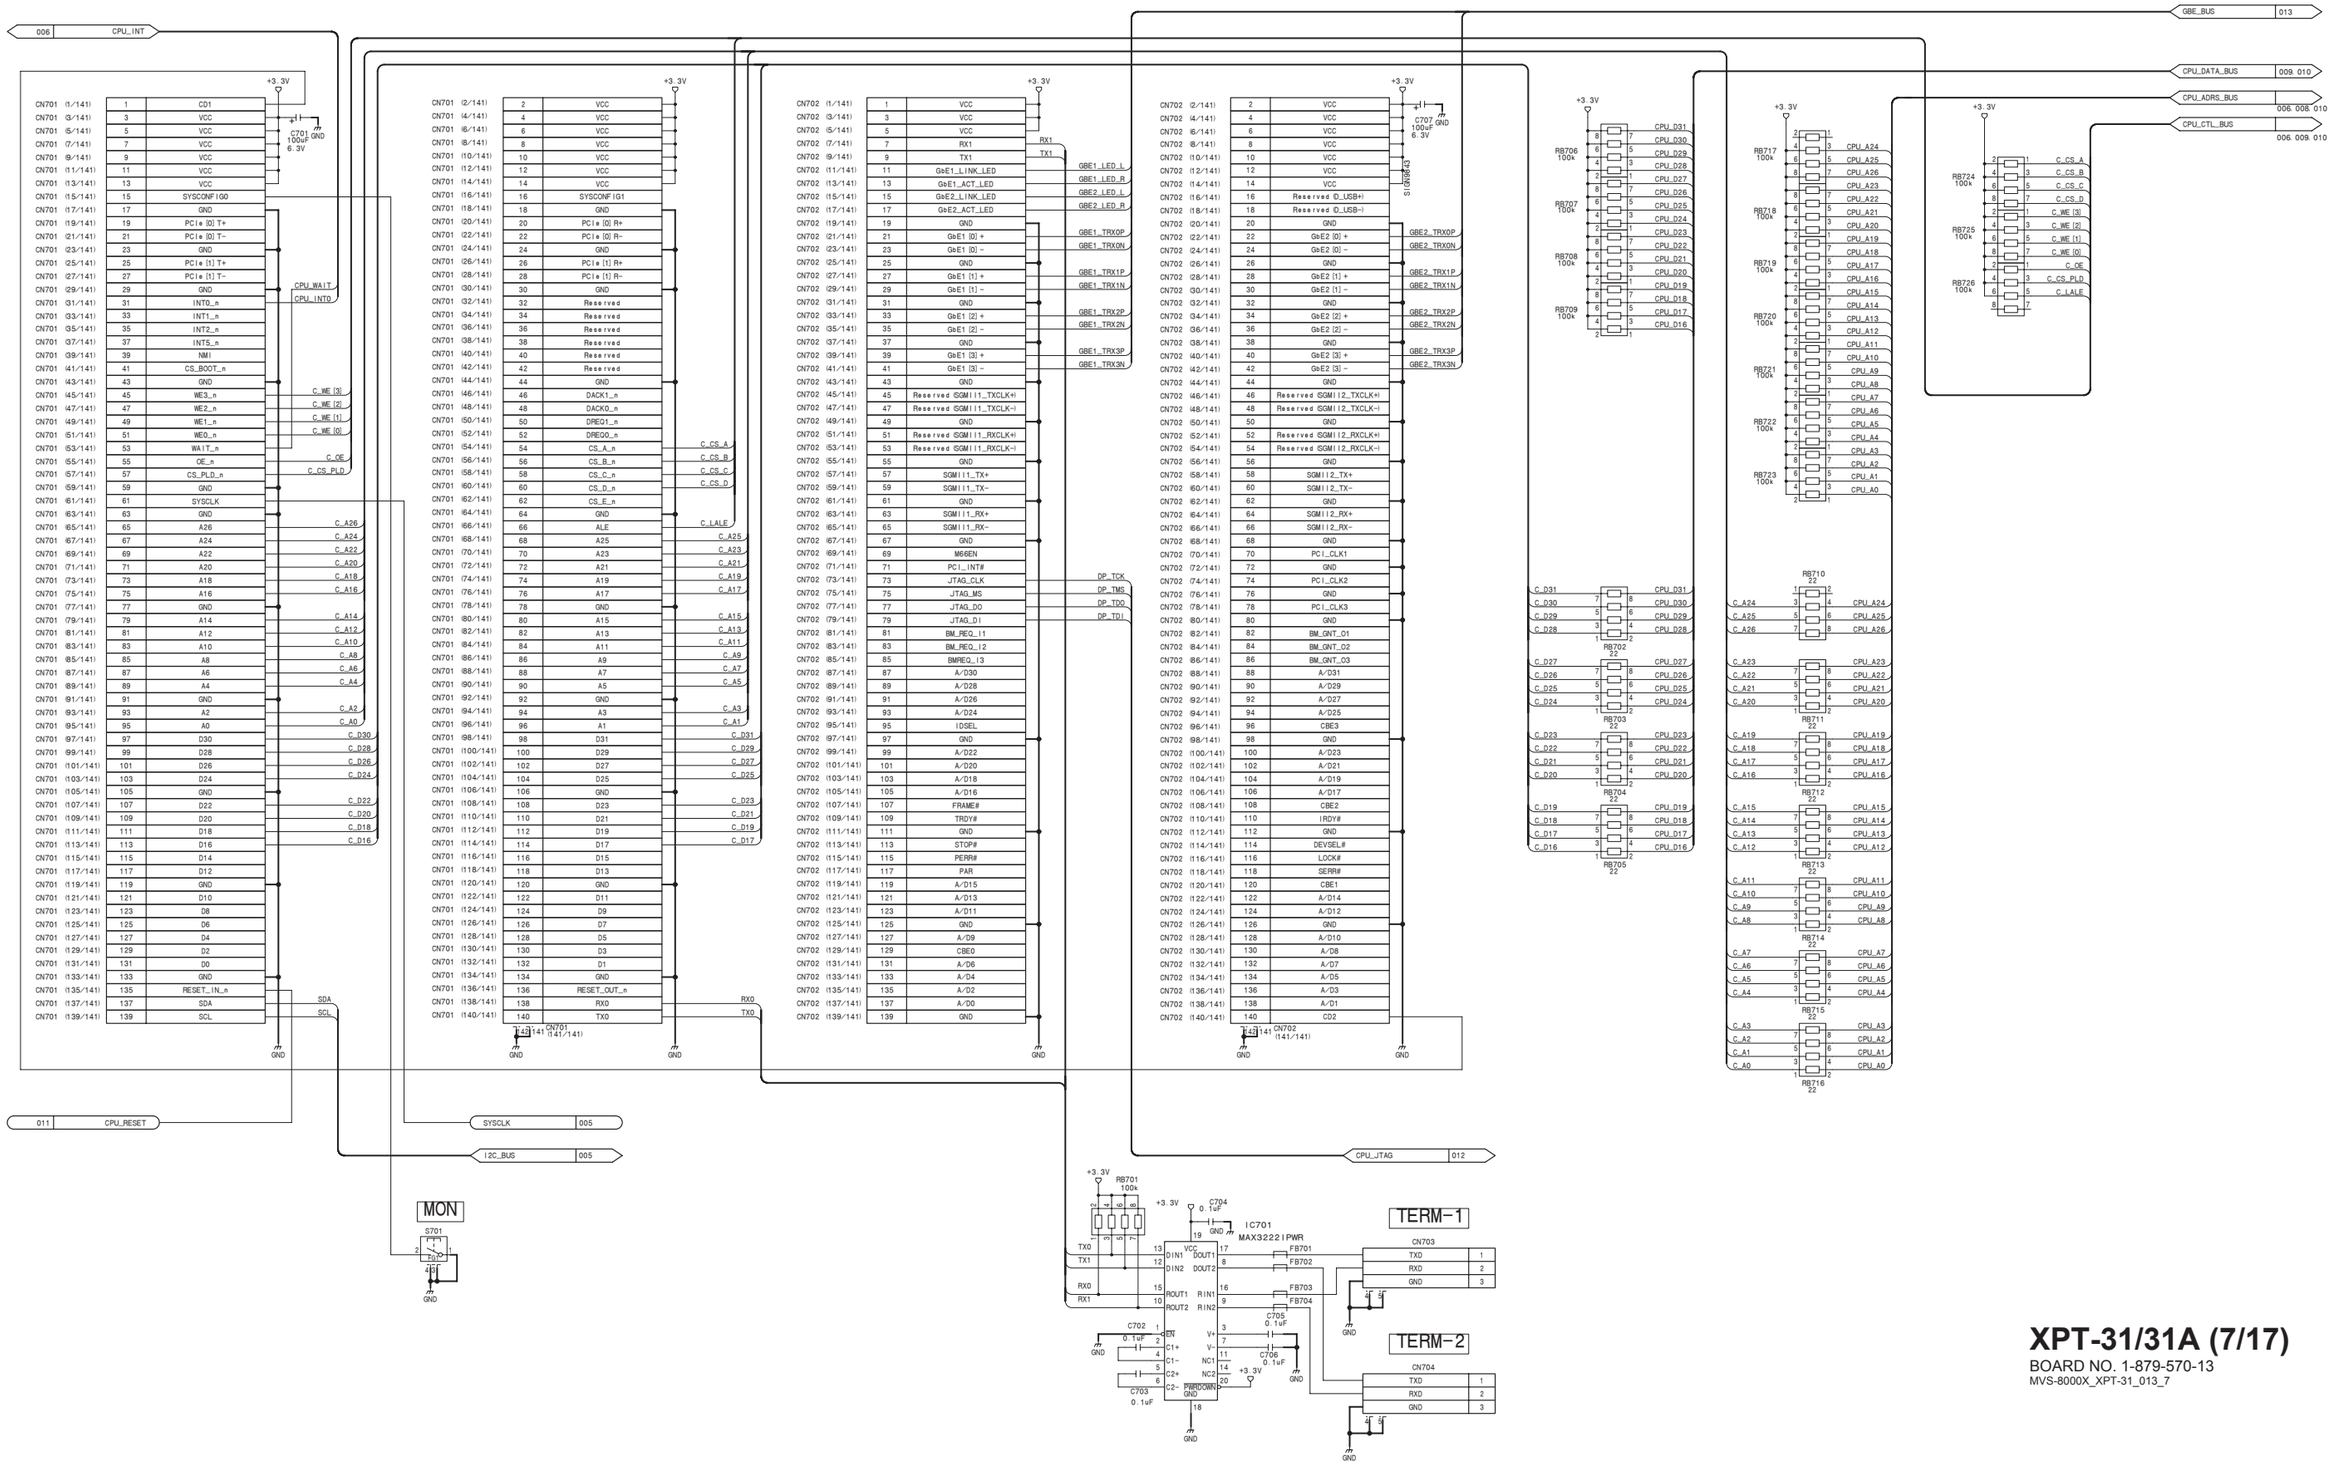

XPT-31/31A (7/17)
BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_7

XPT-31/31A (8/17)
SUFFIX: -13

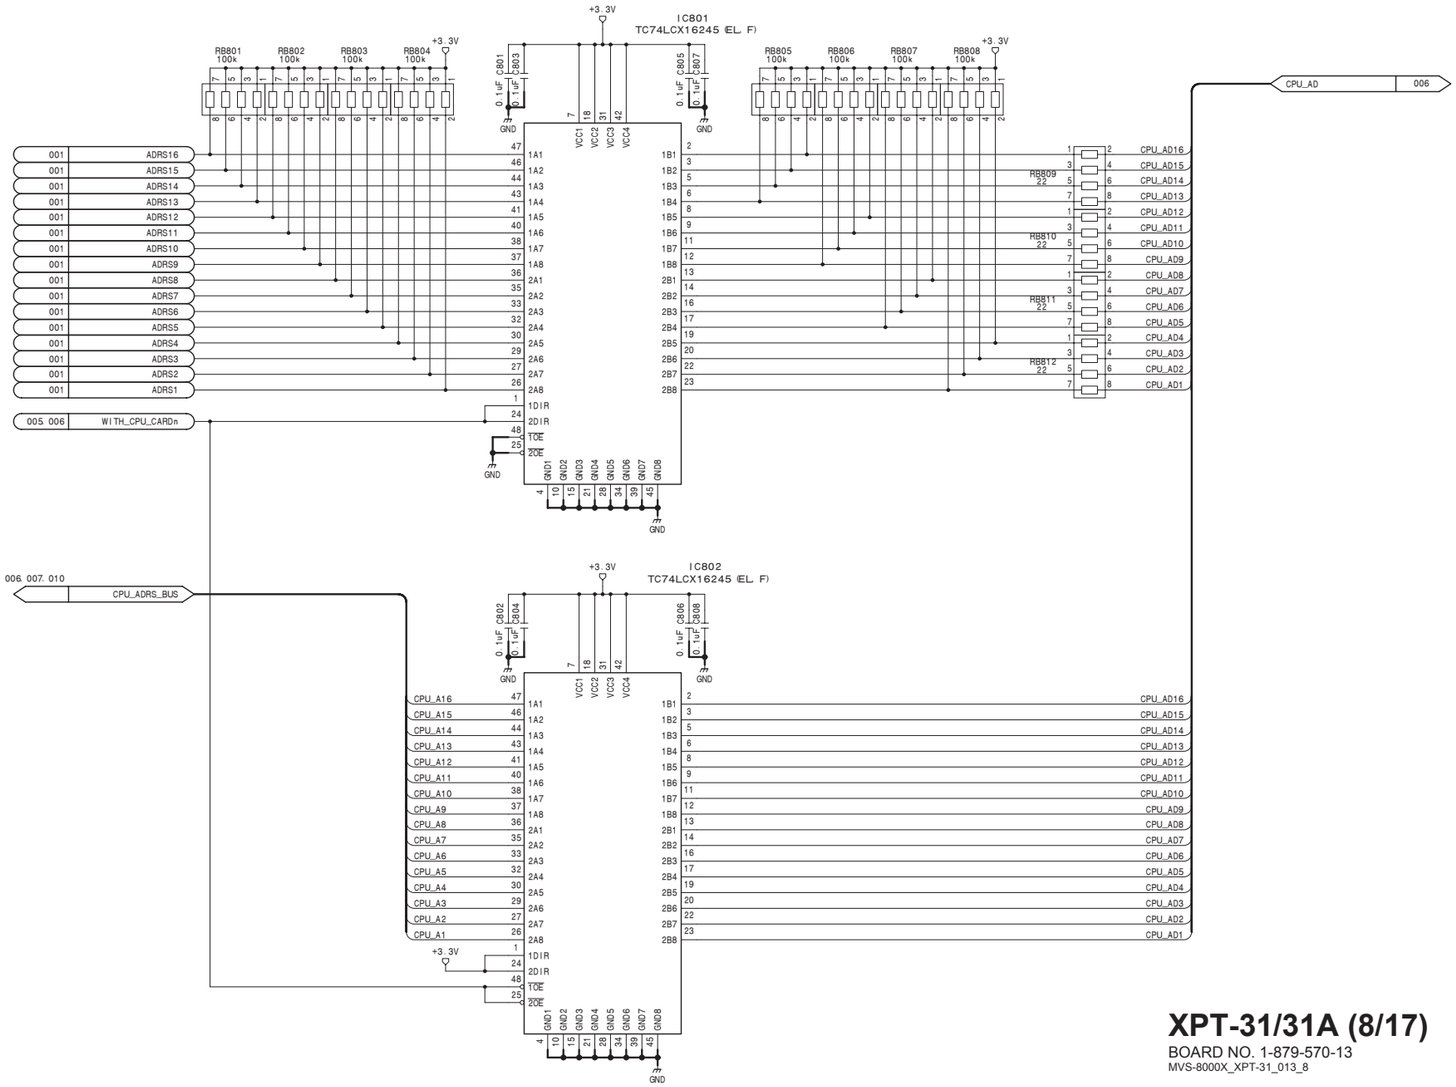

XPT-31/31A (8/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_8

4-340

XPT-31/31A (9/17)
SUFFIX: -13

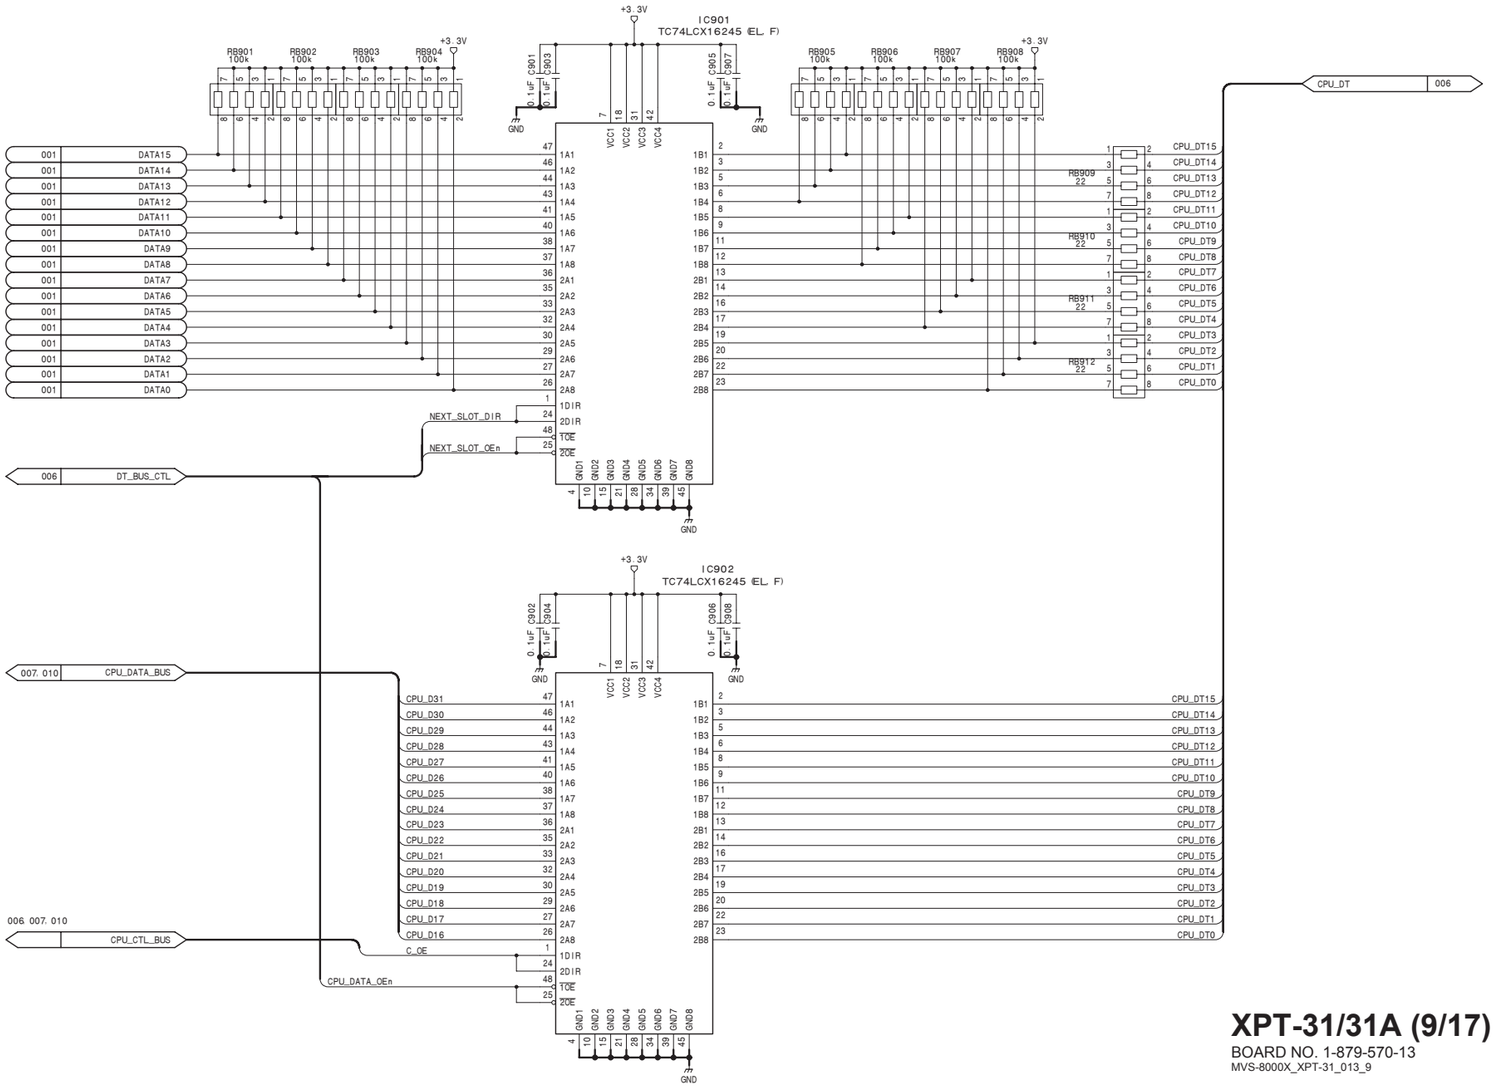

XPT-31/31A (9/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_9

XPT-31/31A (10/17)
SUFFIX: -13

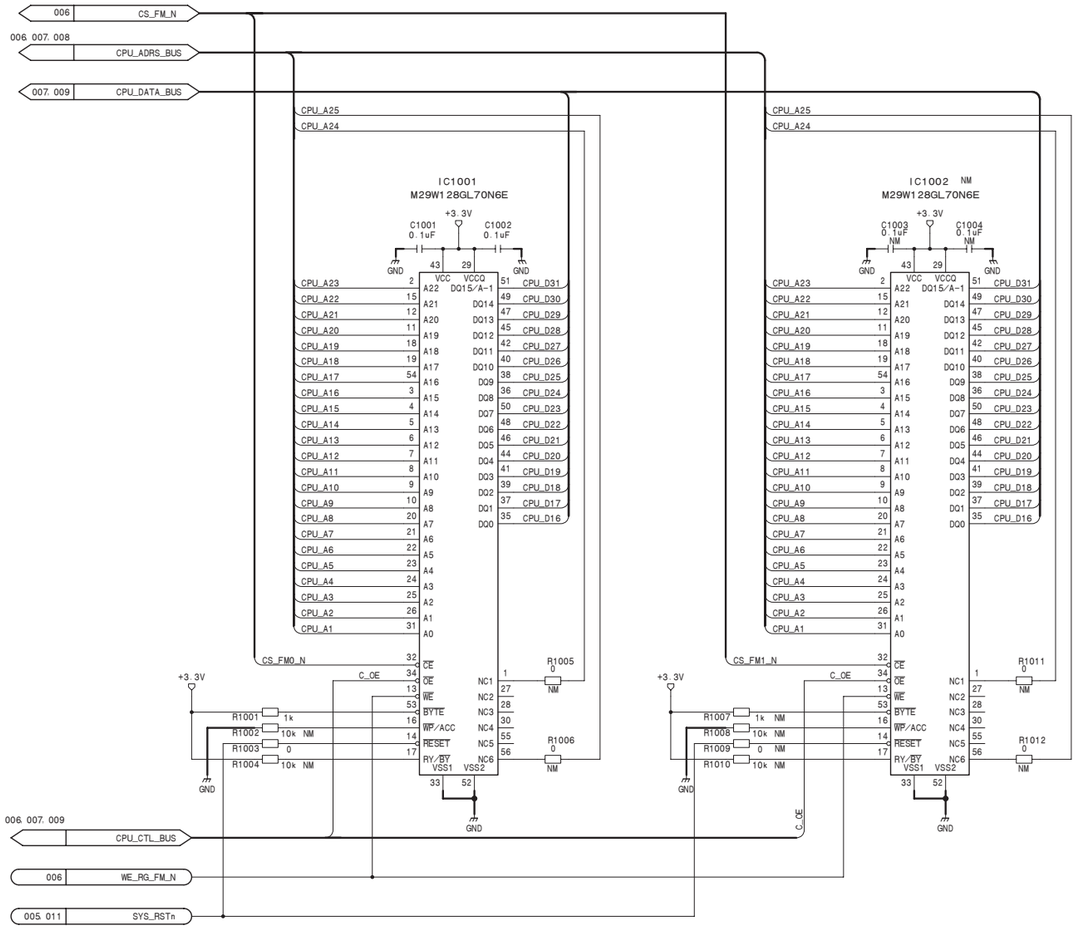

XPT-31/31A (10/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_10

XPT-31/31A (11/17)
SUFFIX: -13

DEV CTL

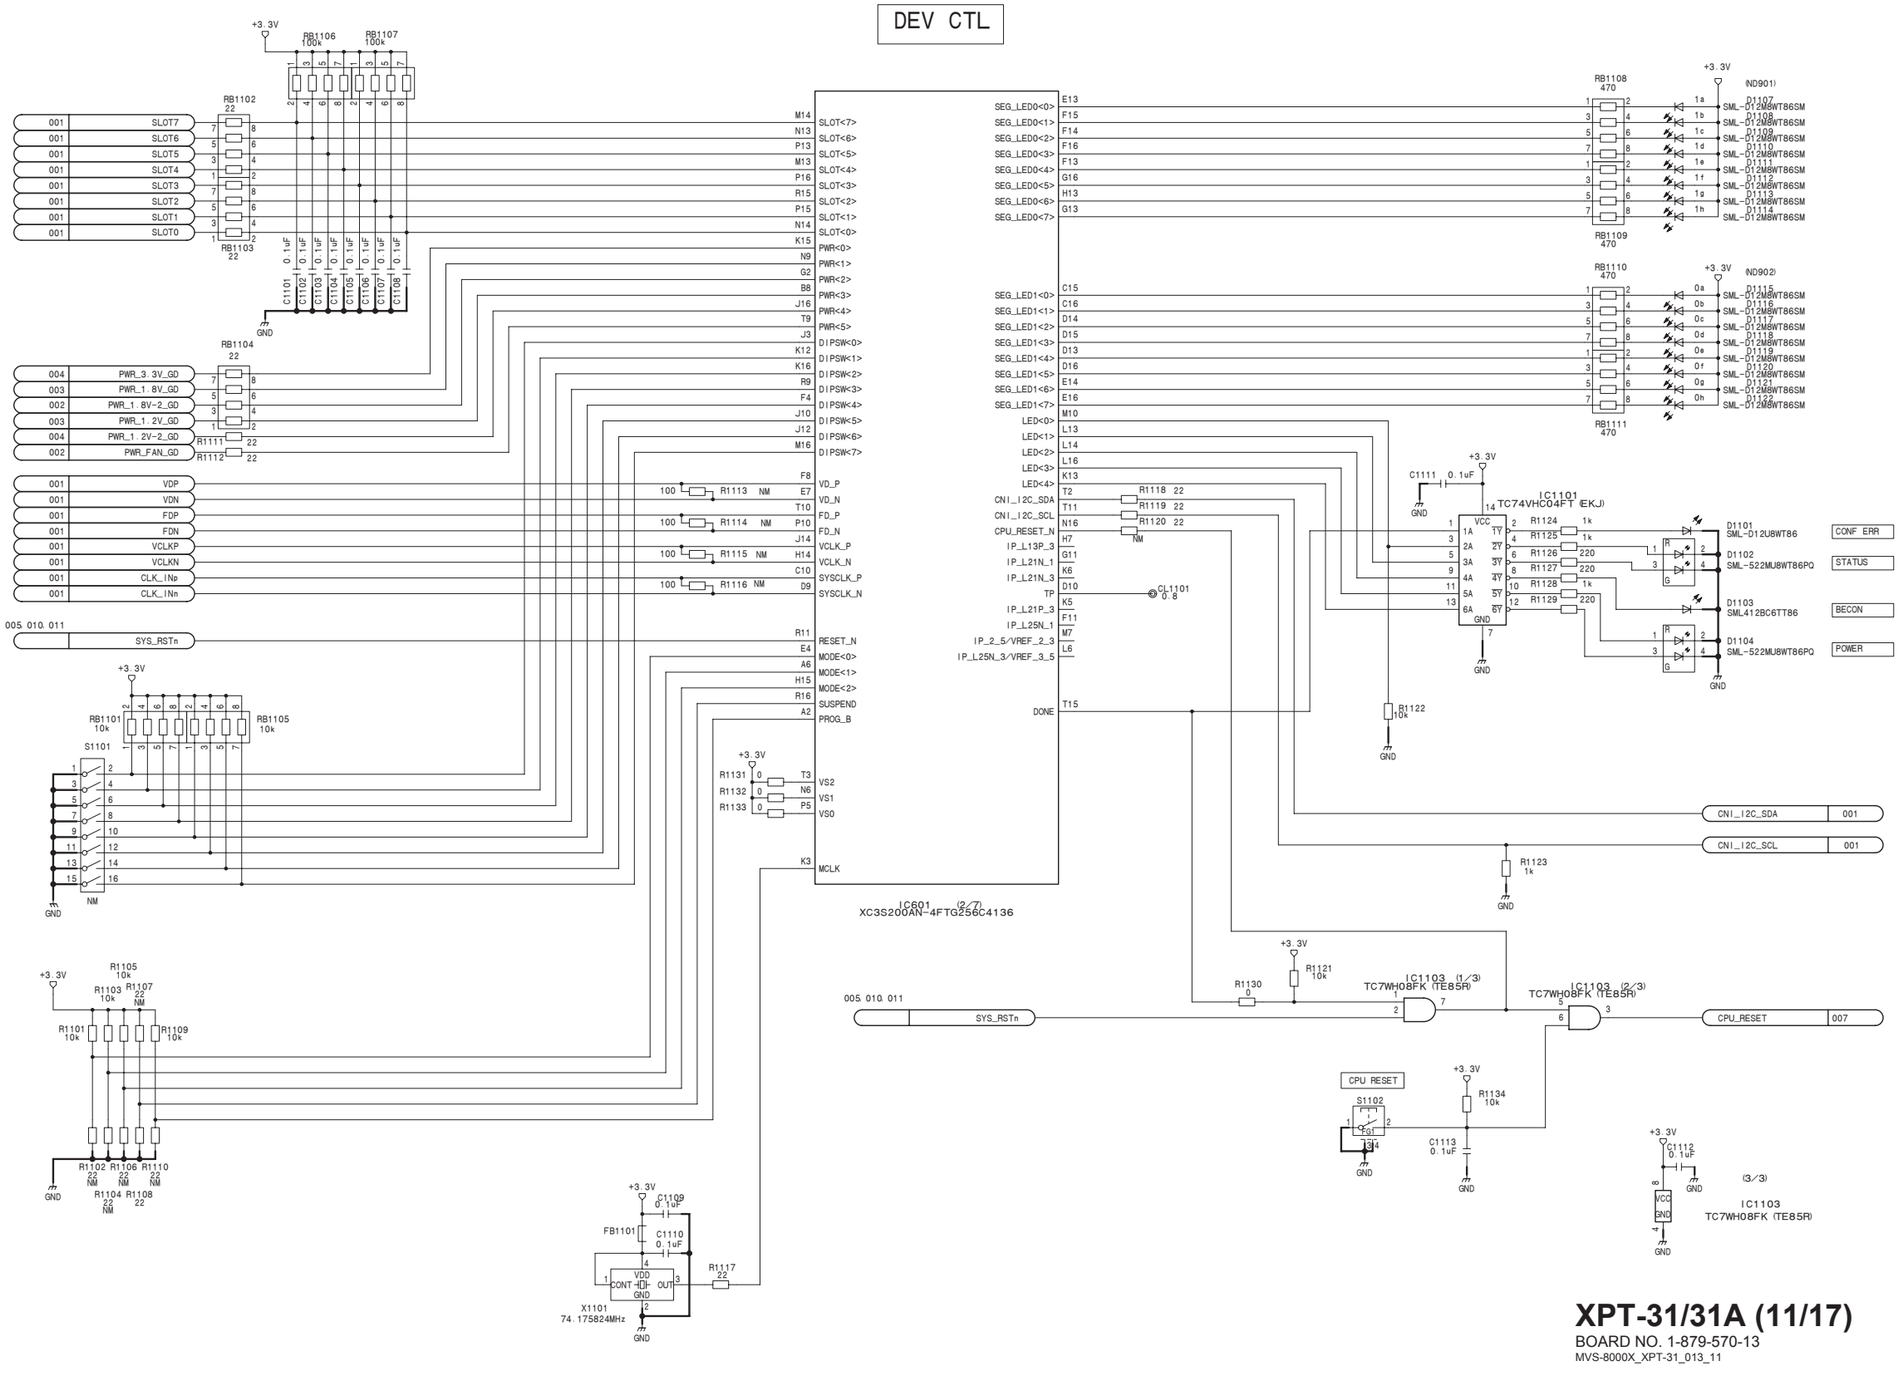

XPT-31/31A (11/17)
BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_11

XPT-31/31A (12/17)
SUFFIX: -13

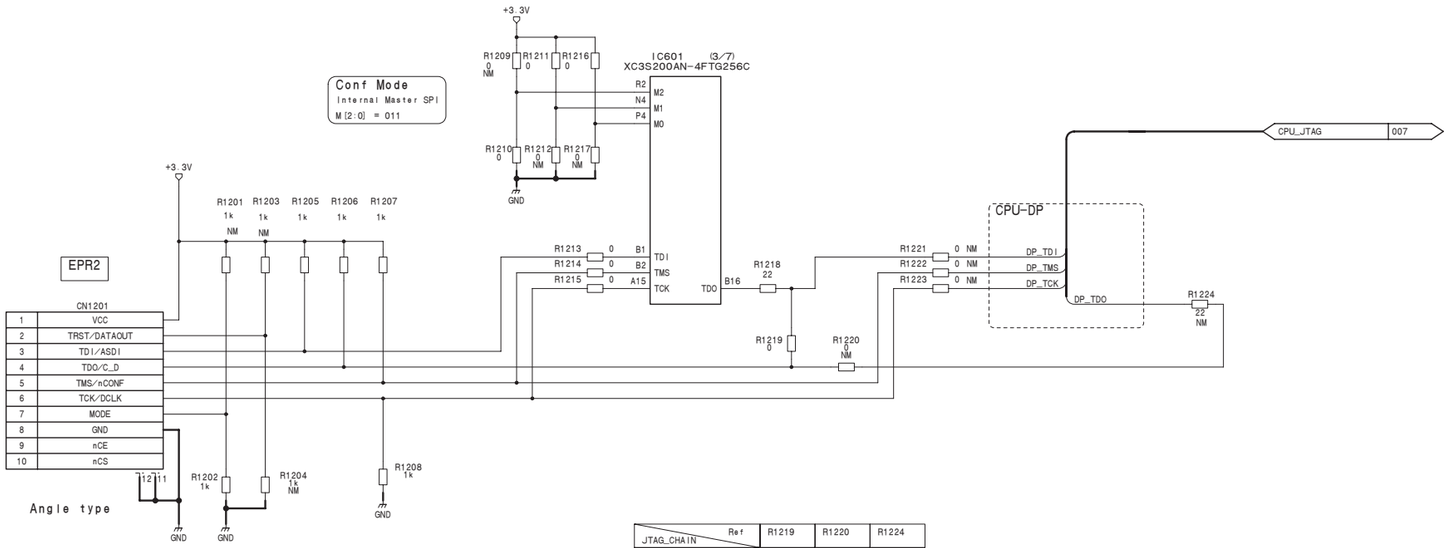

Ref / JTAG_CHAIN	R1219	R1220	R1224
CADEC (IC601)	M't	N.Mt	N.Mt
FULL	N.Mt	M't	M't

XPT-31/31A (12/17)
BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_12

XPT-31/31A (13/17)
SUFFIX: -13

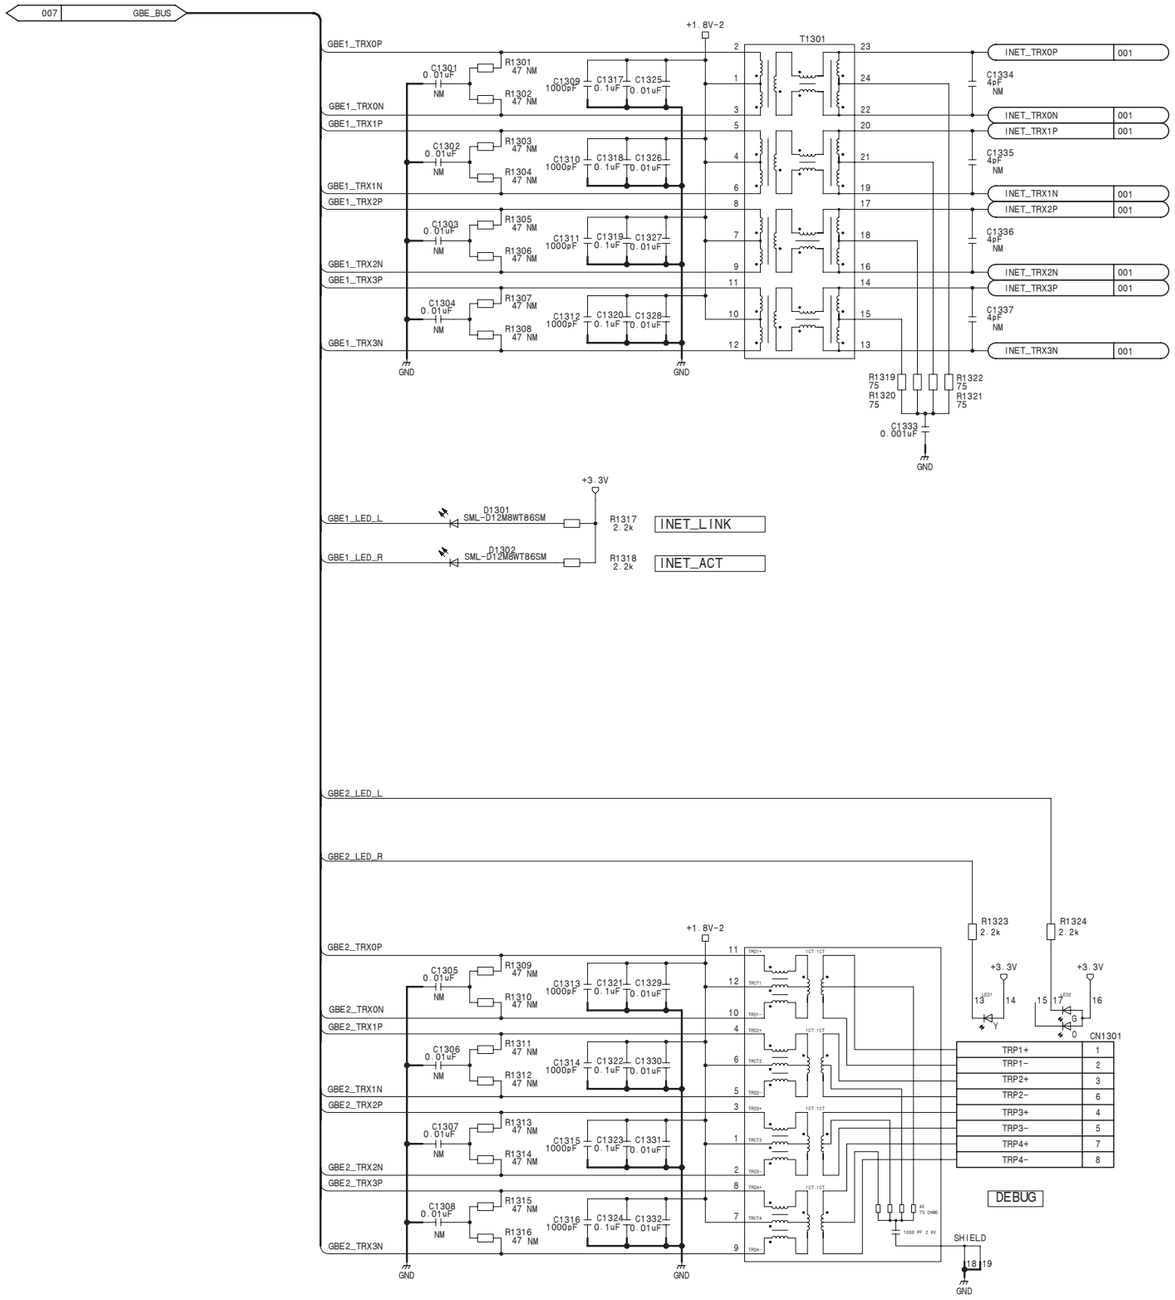

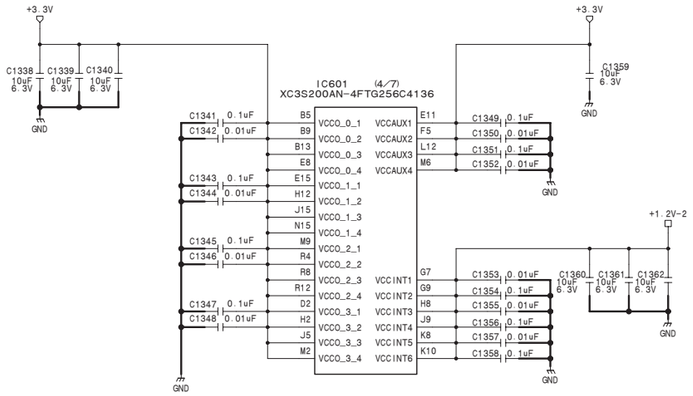





XPT-31/31A (13/17)
BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_13

XPT-31/31A (14/17)
SUFFIX: -13

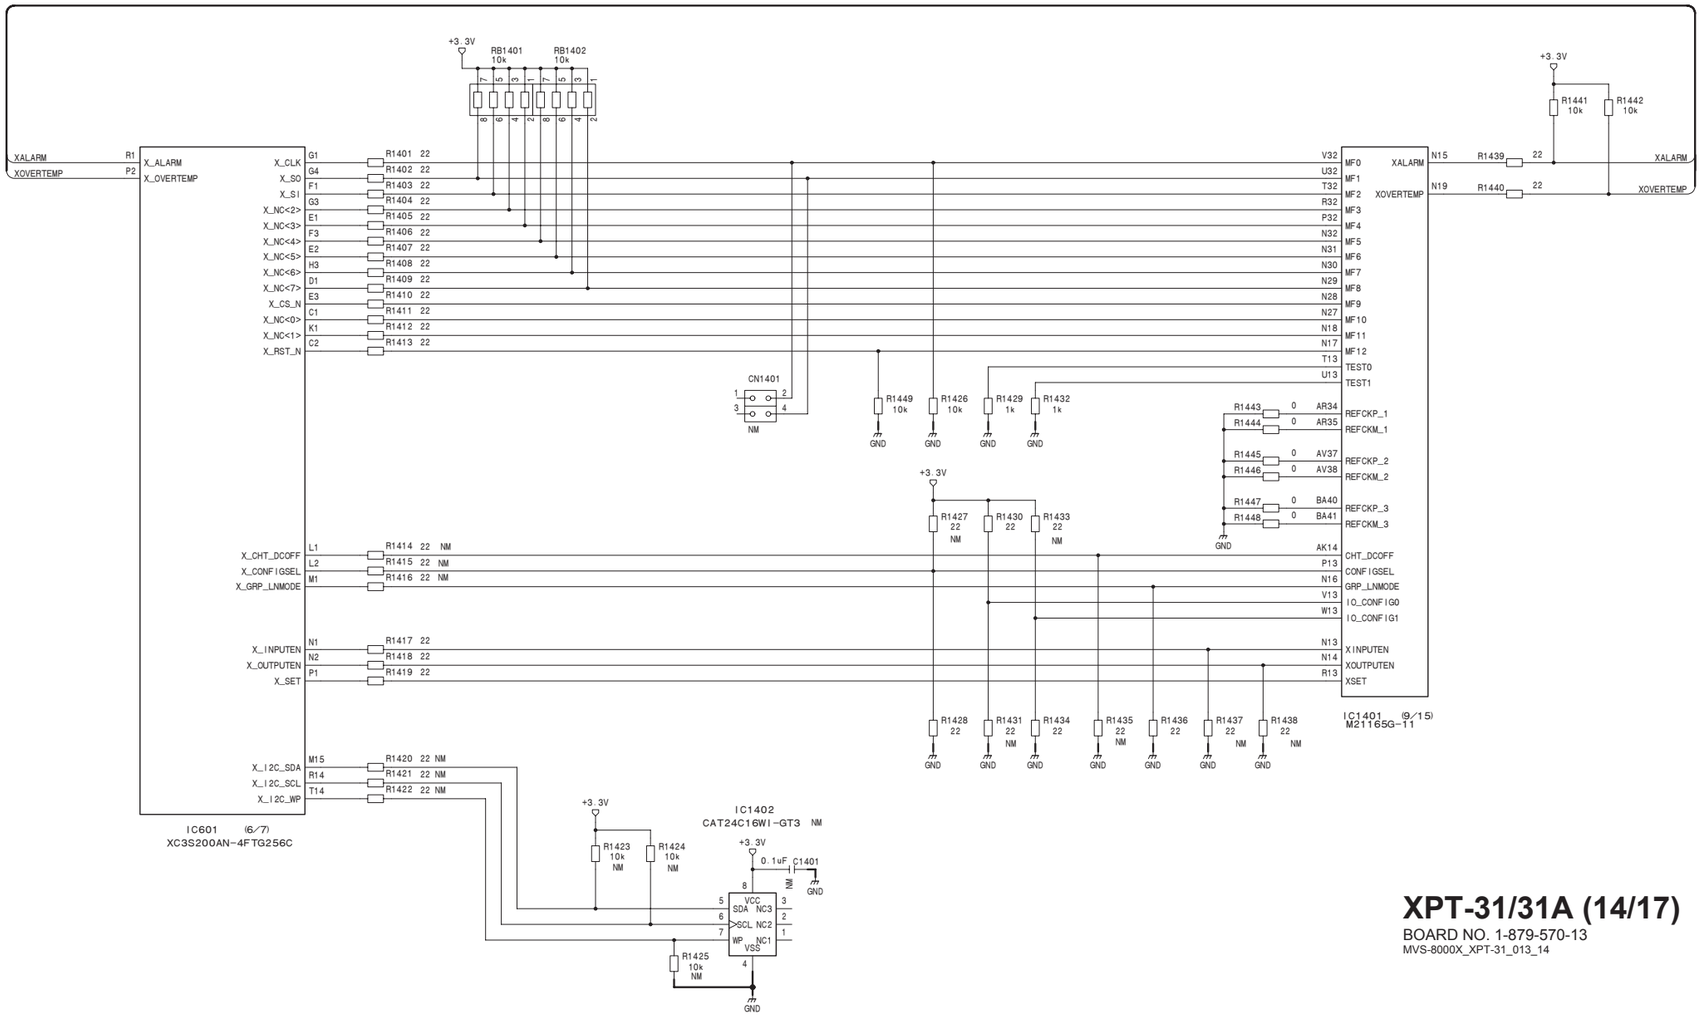

XPT-31/31A (14/17)

BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_14

XPT-31/31A (15/17)

SUFFIX: -13

XPT-31/31A (15/17)

SUFFIX: -13

IC1401 (1/15) M21165G-11

001	XPT_IN013P	M37	INP_0
001	XPT_IN013N	L37	INM_0
001	XPT_IN002P	F43	INP_1
001	XPT_IN002N	E43	INM_1
001	XPT_IN021P	J40	INP_2
001	XPT_IN021N	H40	INM_2
001	XPT_IN001P	E44	INP_3
001	XPT_IN001N	D44	INM_3
001	XPT_IN126P	J8	INP_4
001	XPT_IN126N	K8	INM_4
001	XPT_IN139P	G4	INP_5
001	XPT_IN139N	H4	INM_5
001	XPT_IN140P	F5	INP_6
001	XPT_IN140N	G5	INM_6
001	XPT_IN129P	D1	INP_7
001	XPT_IN129N	E1	INM_7
001	XPT_IN004P	P35	INP_8
001	XPT_IN004N	N35	INM_8
001	XPT_IN011P	H41	INP_9
001	XPT_IN011N	G41	INM_9
001	XPT_IN012P	L38	INP_10
001	XPT_IN012N	K38	INM_10
001	XPT_IN003P	H44	INP_11
001	XPT_IN003N	G44	INM_11
001	XPT_IN125P	M11	INP_12
001	XPT_IN125N	N11	INM_12
001	XPT_IN130P	C2	INP_13
001	XPT_IN130N	D2	INM_13
001	XPT_IN150P	J5	INP_14
001	XPT_IN150N	K5	INM_14
001	XPT_IN127P	G1	INP_15
001	XPT_IN127N	H1	INM_15
001	XPT_IN005P	R34	INP_16
001	XPT_IN005N	P34	INM_16
001	XPT_IN031P	J43	INP_17
001	XPT_IN031N	H43	INM_17
001	XPT_IN023P	M40	INP_18
001	XPT_IN023N	L40	INM_18
001	XPT_IN032P	L44	INP_19
001	XPT_IN032N	K44	INM_19
001	XPT_IN124P	N10	INP_20
001	XPT_IN124N	P10	INM_20
001	XPT_IN149P	K4	INP_21
001	XPT_IN149N	L4	INM_21
001	XPT_IN138P	K7	INP_22
001	XPT_IN138N	L7	INM_22
001	XPT_IN159P	K1	INP_23
001	XPT_IN159N	L1	INM_23
001	XPT_IN015P	R37	INP_24
001	XPT_IN015N	P37	INM_24
001	XPT_IN022P	L41	INP_25
001	XPT_IN022N	K41	INM_25
001	XPT_IN014P	P38	INP_26
001	XPT_IN014N	N38	INM_26
001	XPT_IN034P	P44	INP_27
001	XPT_IN034N	N44	INM_27
001	XPT_IN137P	M8	INP_28
001	XPT_IN137N	N8	INM_28
001	XPT_IN128P	F2	INP_29
001	XPT_IN128N	G2	INM_29
001	XPT_IN148P	M5	INP_30
001	XPT_IN148N	N5	INM_30
001	XPT_IN158P	M2	INP_31
001	XPT_IN158N	N2	INM_31
001	XPT_IN006P	U35	INP_32
001	XPT_IN006N	T35	INM_32
001	XPT_IN033P	M43	INP_33
001	XPT_IN033N	L43	INM_33
001	XPT_IN025P	R40	INP_34
001	XPT_IN025N	P40	INM_34
001	XPT_IN035P	R43	INP_35
001	XPT_IN035N	P43	INM_35
001	XPT_IN123P	R11	INP_36
001	XPT_IN123N	T11	INM_36
001	XPT_IN147P	N4	INP_37
001	XPT_IN147N	P4	INM_37
001	XPT_IN136P	N7	INP_38
001	XPT_IN136N	P7	INM_38
001	XPT_IN157P	N1	INP_39
001	XPT_IN157N	P1	INM_39

IC1401 (2/15) M21165G-11

001	XPT_IN007P	V34	INP_40
001	XPT_IN007N	U34	INM_40
001	XPT_IN024P	P41	INP_41
001	XPT_IN024N	N41	INM_41
001	XPT_IN016P	U38	INP_42
001	XPT_IN016N	T38	INM_42
001	XPT_IN036P	U44	INP_43
001	XPT_IN036N	T44	INM_43
001	XPT_IN135P	R8	INP_44
001	XPT_IN135N	T8	INM_44
001	XPT_IN160P	J2	INP_45
001	XPT_IN160N	K2	INM_45
001	XPT_IN146P	R5	INP_46
001	XPT_IN146N	T5	INM_46
001	XPT_IN156P	R2	INP_47
001	XPT_IN156N	T2	INM_47
001	XPT_IN017P	V37	INP_48
001	XPT_IN017N	U37	INM_48
001	XPT_IN026P	U41	INP_49
001	XPT_IN026N	T41	INM_49
001	XPT_IN027P	V40	INP_50
001	XPT_IN027N	U40	INM_50
001	XPT_IN037P	V43	INP_51
001	XPT_IN037N	U43	INM_51
001	XPT_IN122P	T10	INP_52
001	XPT_IN122N	U10	INM_52
001	XPT_IN145P	T4	INP_53
001	XPT_IN145N	U4	INM_53
001	XPT_IN134P	T7	INP_54
001	XPT_IN134N	U7	INM_54
001	XPT_IN155P	T1	INP_55
001	XPT_IN155N	U1	INM_55
001	XPT_IN008P	Y35	INP_56
001	XPT_IN008N	W35	INM_56
001	XPT_IN029P	AA40	INP_57
001	XPT_IN029N	Y40	INM_57
001	XPT_IN018P	Y38	INP_58
001	XPT_IN018N	W38	INM_58
001	XPT_IN038P	Y44	INP_59
001	XPT_IN038N	W44	INM_59
001	XPT_IN121P	V11	INP_60
001	XPT_IN121N	W11	INM_60
001	XPT_IN144P	V5	INP_61
001	XPT_IN144N	W5	INM_61
001	XPT_IN133P	V8	INP_62
001	XPT_IN133N	W8	INM_62
001	XPT_IN154P	V2	INP_63
001	XPT_IN154N	W2	INM_63
001	XPT_IN009P	AA34	INP_64
001	XPT_IN009N	Y34	INM_64
001	XPT_IN028P	Y41	INP_65
001	XPT_IN028N	W41	INM_65
001	XPT_IN019P	AA37	INP_66
001	XPT_IN019N	Y37	INM_66
001	XPT_IN039P	AA43	INP_67
001	XPT_IN039N	Y43	INM_67
001	XPT_IN090P	W10	INP_68
001	XPT_IN090N	Y10	INM_68
001	XPT_IN143P	W4	INP_69
001	XPT_IN143N	Y4	INM_69
001	XPT_IN132P	W7	INP_70
001	XPT_IN132N	Y7	INM_70
001	XPT_IN153P	W1	INP_71
001	XPT_IN153N	Y1	INM_71
001	XPT_IN010P	AC35	INP_72
001	XPT_IN010N	AB35	INM_72
001	XPT_IN030P	AC41	INP_73
001	XPT_IN030N	AB41	INM_73
001	XPT_IN020P	AC38	INP_74
001	XPT_IN020N	AB38	INM_74
001	XPT_IN040P	AC44	INP_75
001	XPT_IN040N	AB44	INM_75
001	XPT_IN089P	AA11	INP_76
001	XPT_IN089N	AB11	INM_76
001	XPT_IN142P	AA5	INP_77
001	XPT_IN142N	AB5	INM_77
001	XPT_IN131P	AA8	INP_78
001	XPT_IN131N	AB8	INM_78
001	XPT_IN152P	AA2	INP_79
001	XPT_IN152N	AB2	INM_79

IC1401 (3/15) M21165G-11

001	XPT_IN041P	AD34	INP_80
001	XPT_IN041N	AC34	INM_80
001	XPT_IN061P	AD40	INP_81
001	XPT_IN061N	AC40	INM_81
001	XPT_IN051P	AD37	INP_82
001	XPT_IN051N	AC37	INM_82
001	XPT_IN071P	AD43	INP_83
001	XPT_IN071N	AC43	INM_83
001	XPT_IN088P	AB10	INP_84
001	XPT_IN088N	AC10	INM_84
001	XPT_IN141P	AB4	INP_85
001	XPT_IN141N	AC4	INM_85
001	XPT_IN100P	AB7	INP_86
001	XPT_IN100N	AC7	INM_86
001	XPT_IN151P	AB1	INP_87
001	XPT_IN151N	AC1	INM_87
001	XPT_IN042P	AF35	INP_88
001	XPT_IN042N	AE35	INM_88
001	XPT_IN062P	AF41	INP_89
001	XPT_IN062N	AE41	INM_89
001	XPT_IN052P	AF38	INP_90
001	XPT_IN052N	AE38	INM_90
001	XPT_IN072P	AF44	INP_91
001	XPT_IN072N	AE44	INM_91
001	XPT_IN087P	AD11	INP_92
001	XPT_IN087N	AE11	INM_92
001	XPT_IN109P	AE4	INP_93
001	XPT_IN109N	AF4	INM_93
001	XPT_IN099P	AD8	INP_94
001	XPT_IN099N	AE8	INM_94
001	XPT_IN120P	AD2	INP_95
001	XPT_IN120N	AE2	INM_95
001	XPT_IN043P	AG34	INP_96
001	XPT_IN043N	AF34	INM_96
001	XPT_IN063P	AG40	INP_97
001	XPT_IN063N	AF40	INM_97
001	XPT_IN053P	AG37	INP_98
001	XPT_IN053N	AF37	INM_98
001	XPT_IN073P	AG43	INP_99
001	XPT_IN073N	AF43	INM_99
001	XPT_IN086P	AE10	INP_100
001	XPT_IN086N	AF10	INM_100
001	XPT_IN110P	AD5	INP_101
001	XPT_IN110N	AE5	INM_101
001	XPT_IN098P	AE7	INP_102
001	XPT_IN098N	AF7	INM_102
001	XPT_IN119P	AE1	INP_103
001	XPT_IN119N	AF1	INM_103
001	XPT_IN044P	AJ35	INP_104
001	XPT_IN044N	AH35	INM_104
001	XPT_IN064P	AJ41	INP_105
001	XPT_IN064N	AH41	INM_105
001	XPT_IN054P	AJ38	INP_106
001	XPT_IN054N	AH38	INM_106
001	XPT_IN074P	AJ44	INP_107
001	XPT_IN074N	AH44	INM_107
001	XPT_IN097P	AG8	INP_108
001	XPT_IN097N	AH8	INM_108
001	XPT_IN107P	AH4	INP_109
001	XPT_IN107N	AJ4	INM_109
001	XPT_IN108P	AG5	INP_110
001	XPT_IN108N	AH5	INM_110
001	XPT_IN118P	AG2	INP_111
001	XPT_IN118N	AH2	INM_111
001	XPT_IN055P	AK37	INP_112
001	XPT_IN055N	AJ37	INM_112
001	XPT_IN079P	AT43	INP_113
001	XPT_IN079N	AR43	INM_113
001	XPT_IN065P	AK40	INP_114
001	XPT_IN065N	AJ40	INM_114
001	XPT_IN075P	AK43	INP_115
001	XPT_IN075N	AJ43	INM_115
001	XPT_IN085P	AG11	INP_116
001	XPT_IN085N	AH11	INM_116
001	XPT_IN105P	AL4	INP_117
001	XPT_IN105N	AM4	INM_117
001	XPT_IN096P	AH7	INP_118
001	XPT_IN096N	AJ7	INM_118
001	XPT_IN117P	AH1	INP_119
001	XPT_IN117N	AJ1	INM_119

IC1401 (4/15) M21165G-11

001	XPT_IN045P	AK34	INP_120
001	XPT_IN045N	AJ34	INM_120
001	XPT_IN066P	AM41	INP_121
001	XPT_IN066N	AL41	INM_121
001	XPT_IN056P	AM38	INP_122
001	XPT_IN056N	AL38	INM_122
001	XPT_IN076P	AM44	INP_123
001	XPT_IN076N	AL44	INM_123
001	XPT_IN084P	AH10	INP_124
001	XPT_IN084N	AJ10	INM_124
001	XPT_IN114P	AN2	INP_125
001	XPT_IN114N	AP2	INM_125
001	XPT_IN106P	AK5	INP_126
001	XPT_IN106N	AL5	INM_126
001	XPT_IN116P	AK2	INP_127
001	XPT_IN116N	AL2	INM_127
001	XPT_IN057P	AN37	INP_128
001	XPT_IN057N	AM37	INM_128
001	XPT_IN049P	AW43	INP_129
001	XPT_IN049N	AV43	INM_129
001	XPT_IN067P	AN40	INP_130
001	XPT_IN067N	AM40	INM_130
001	XPT_IN077P	AN43	INP_131
001	XPT_IN077N	AM43	INM_131
001	XPT_IN095P	AK8	INP_132
001	XPT_IN095N	AL8	INM_132
001	XPT_IN103P	AP4	INP_133
001	XPT_IN103N	AR4	INM_133
001	XPT_IN094P	AL7	INP_134
001	XPT_IN094N	AM7	INM_134
001	XPT_IN115P	AL1	INP_135
001	XPT_IN115N	AM1	INM_135
001	XPT_IN046P	AM35	INP_136
001	XPT_IN046N	AL35	INM_136
001	XPT_IN068P	AR41	INP_137
001	XPT_IN068N	AP41	INM_137
001	XPT_IN048P	AR38	INP_138
001	XPT_IN048N	AP38	INM_138
001	XPT_IN078P	AR44	INP_139
001	XPT_IN078N	AP44	INM_139
001	XPT_IN083P	AK11	INP_140
001	XPT_IN083N	AL11	INM_140
001	XPT_IN112P	AT2	INP_141
001	XPT_IN112N	AU2	INM_141
001	XPT_IN104P	AN5	INP_142
001	XPT_IN104N	AP5	INM_142
001	XPT_IN113P	AP1	INP_143
001	XPT_IN113N	AR1	INM_143
001	XPT_IN047P	AN34	INP_144
001	XPT_IN047N	AM34	INM_144
001	XPT_IN050P	BB43	INP_145
001	XPT_IN050N	BA43	INM_145
001	XPT_IN069P	AT40	INP_146
001	XPT_IN069N	AR40	INM_146
001	XPT_IN080P	AV44	INP_147
001	XPT_IN080N	AU44	INM_147
001	XPT_IN082P	AL10	INP_148
001	XPT_IN082N	AM10	INM_148
001	XPT_IN101P	AU4	INP_149
001	XPT_IN101N	AV4	INM_149
001	XPT_IN092P	AP7	INP_150
001	XPT_IN092N	AR7	INM_150
001	XPT_IN111P	AU1	INP_151
001	XPT_IN111N	AV1	INM_151
001	XPT_IN058P	AT37	INP_152
001	XPT_IN058N	AR37	INM_152
001	XPT_IN070P	AV41	INP_153
001	XPT_IN070N	AU41	INM_153
001	XPT_IN059P	AW40	INP_154
001	XPT_IN059N	AV40	INM_154
001	XPT_IN060P	BA44	INP_155
001	XPT_IN060N	AY44	INM_155
001	XPT_IN093P	AN8	INP_156
001	XPT_IN093N	AP8	INM_156
001	XPT_IN081P	AW2	INP_157
001	XPT_IN081N	AY2	INM_157
001	XPT_IN102P	AT5	INP_158
001	XPT_IN102N	AU5	INM_158
001	XPT_IN091P	AY1	INP_159
001	XPT_IN091N	BA1	INM_159

XPT-31/31A (15/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_15

XPT-31/31A (16/17) SUFFIX: -13

IC1401 (5/15) M21165G-11

OUTP_0	D38	XPT_OUT139P	001
OUTM_0	D37	XPT_OUT139N	001
OUTP_1	A41	XPT_OUT129P	001
OUTM_1	A40	XPT_OUT129N	001
OUTP_2	B42	XPT_OUT130P	001
OUTM_2	B41	XPT_OUT130N	001
OUTP_3	A38	XPT_OUT127P	001
OUTM_3	A37	XPT_OUT127N	001
OUTP_4	BC39	XPT_OUT002P	001
OUTM_4	BC40	XPT_OUT002N	001
OUTP_5	BD40	XPT_OUT001P	001
OUTM_5	BD41	XPT_OUT001N	001
OUTP_6	BA37	XPT_OUT011P	001
OUTM_6	BA38	XPT_OUT011N	001
OUTP_7	BD37	XPT_OUT003P	001
OUTM_7	BD38	XPT_OUT003N	001
OUTP_8	H36	XPT_OUT126P	001
OUTM_8	H35	XPT_OUT126N	001
OUTP_9	E39	XPT_OUT140P	001
OUTM_9	E38	XPT_OUT140N	001
OUTP_10	L33	XPT_OUT125P	001
OUTM_10	L32	XPT_OUT125N	001
OUTP_11	E36	XPT_OUT150P	001
OUTM_11	E35	XPT_OUT150N	001
OUTP_12	AU33	XPT_OUT013P	001
OUTM_12	AU34	XPT_OUT013N	001
OUTP_13	AY36	XPT_OUT021P	001
OUTM_13	AY37	XPT_OUT021N	001
OUTP_14	AR31	XPT_OUT004P	001
OUTM_14	AR32	XPT_OUT004N	001
OUTP_15	AV34	XPT_OUT012P	001
OUTM_15	AV35	XPT_OUT012N	001
OUTP_16	D35	XPT_OUT149P	001
OUTM_16	D34	XPT_OUT149N	001
OUTP_17	A35	XPT_OUT159P	001
OUTM_17	A34	XPT_OUT159N	001
OUTP_18	B39	XPT_OUT128P	001
OUTM_18	B38	XPT_OUT128N	001
OUTP_19	B33	XPT_OUT158P	001
OUTM_19	B32	XPT_OUT158N	001
OUTP_20	BC36	XPT_OUT031P	001
OUTM_20	BC37	XPT_OUT031N	001
OUTP_21	BD34	XPT_OUT032P	001
OUTM_21	BD35	XPT_OUT032N	001
OUTP_22	BA34	XPT_OUT022P	001
OUTM_22	BA35	XPT_OUT022N	001
OUTP_23	BD31	XPT_OUT034P	001
OUTM_23	BD32	XPT_OUT034N	001
OUTP_24	K32	XPT_OUT124P	001
OUTM_24	K31	XPT_OUT124N	001
OUTP_25	G35	XPT_OUT138P	001
OUTM_25	G34	XPT_OUT138N	001
OUTP_26	H33	XPT_OUT137P	001
OUTM_26	H32	XPT_OUT137N	001
OUTP_27	E33	XPT_OUT148P	001
OUTM_27	E32	XPT_OUT148N	001
OUTP_28	AP30	XPT_OUT005P	001
OUTM_28	AP31	XPT_OUT005N	001
OUTP_29	AY33	XPT_OUT023P	001
OUTM_29	AY34	XPT_OUT023N	001
OUTP_30	AU30	XPT_OUT015P	001
OUTM_30	AU31	XPT_OUT015N	001
OUTP_31	AV31	XPT_OUT014P	001
OUTM_31	AV32	XPT_OUT014N	001
OUTP_32	D32	XPT_OUT147P	001
OUTM_32	D31	XPT_OUT147N	001
OUTP_33	A32	XPT_OUT157P	001
OUTM_33	A31	XPT_OUT157N	001
OUTP_34	B36	XPT_OUT160P	001
OUTM_34	B35	XPT_OUT160N	001
OUTP_35	B30	XPT_OUT156P	001
OUTM_35	B29	XPT_OUT156N	001
OUTP_36	BC33	XPT_OUT033P	001
OUTM_36	BC34	XPT_OUT033N	001
OUTP_37	BC30	XPT_OUT035P	001
OUTM_37	BC31	XPT_OUT035N	001
OUTP_38	BA31	XPT_OUT024P	001
OUTM_38	BA32	XPT_OUT024N	001
OUTP_39	BD28	XPT_OUT036P	001
OUTM_39	BD29	XPT_OUT036N	001

IC1401 (6/15) M21165G-11

OUTP_40	L30	XPT_OUT123P	001
OUTM_40	L29	XPT_OUT123N	001
OUTP_41	G32	XPT_OUT136P	001
OUTM_41	G31	XPT_OUT136N	001
OUTP_42	H30	XPT_OUT135P	001
OUTM_42	H29	XPT_OUT135N	001
OUTP_43	E30	XPT_OUT146P	001
OUTM_43	E29	XPT_OUT146N	001
OUTP_44	AR28	XPT_OUT006P	001
OUTM_44	AR29	XPT_OUT006N	001
OUTP_45	AY30	XPT_OUT025P	001
OUTM_45	AY31	XPT_OUT025N	001
OUTP_46	AP27	XPT_OUT007P	001
OUTM_46	AP28	XPT_OUT007N	001
OUTP_47	AV28	XPT_OUT016P	001
OUTM_47	AV29	XPT_OUT016N	001
OUTP_48	D29	XPT_OUT145P	001
OUTM_48	D28	XPT_OUT145N	001
OUTP_49	A29	XPT_OUT155P	001
OUTM_49	A28	XPT_OUT155N	001
OUTP_50	E27	XPT_OUT144P	001
OUTM_50	E26	XPT_OUT144N	001
OUTP_51	B27	XPT_OUT154P	001
OUTM_51	B26	XPT_OUT154N	001
OUTP_52	BA28	XPT_OUT026P	001
OUTM_52	BA29	XPT_OUT026N	001
OUTP_53	BC27	XPT_OUT037P	001
OUTM_53	BC28	XPT_OUT037N	001
OUTP_54	AY24	XPT_OUT029P	001
OUTM_54	AY25	XPT_OUT029N	001
OUTP_55	BD25	XPT_OUT038P	001
OUTM_55	BD26	XPT_OUT038N	001
OUTP_56	K29	XPT_OUT122P	001
OUTM_56	K28	XPT_OUT122N	001
OUTP_57	G29	XPT_OUT134P	001
OUTM_57	G28	XPT_OUT134N	001
OUTP_58	L27	XPT_OUT121P	001
OUTM_58	L26	XPT_OUT121N	001
OUTP_59	H27	XPT_OUT133P	001
OUTM_59	H26	XPT_OUT133N	001
OUTP_60	AU27	XPT_OUT017P	001
OUTM_60	AU28	XPT_OUT017N	001
OUTP_61	AY27	XPT_OUT027P	001
OUTM_61	AY28	XPT_OUT027N	001
OUTP_62	AR25	XPT_OUT008P	001
OUTM_62	AR26	XPT_OUT008N	001
OUTP_63	AV25	XPT_OUT018P	001
OUTM_63	AV26	XPT_OUT018N	001
OUTP_64	D26	XPT_OUT143P	001
OUTM_64	D25	XPT_OUT143N	001
OUTP_65	A26	XPT_OUT153P	001
OUTM_65	A25	XPT_OUT153N	001
OUTP_66	E24	XPT_OUT142P	001
OUTM_66	E23	XPT_OUT142N	001
OUTP_67	B24	XPT_OUT152P	001
OUTM_67	B23	XPT_OUT152N	001
OUTP_68	BA25	XPT_OUT028P	001
OUTM_68	BA26	XPT_OUT028N	001
OUTP_69	BC24	XPT_OUT039P	001
OUTM_69	BC25	XPT_OUT039N	001
OUTP_70	BA22	XPT_OUT030P	001
OUTM_70	BA23	XPT_OUT030N	001
OUTP_71	BD22	XPT_OUT040P	001
OUTM_71	BD23	XPT_OUT040N	001
OUTP_72	K26	XPT_OUT090P	001
OUTM_72	K25	XPT_OUT090N	001
OUTP_73	G26	XPT_OUT132P	001
OUTM_73	G25	XPT_OUT132N	001
OUTP_74	L24	XPT_OUT089P	001
OUTM_74	L23	XPT_OUT089N	001
OUTP_75	H24	XPT_OUT131P	001
OUTM_75	H23	XPT_OUT131N	001
OUTP_76	AP24	XPT_OUT009P	001
OUTM_76	AP25	XPT_OUT009N	001
OUTP_77	AU24	XPT_OUT019P	001
OUTM_77	AU25	XPT_OUT019N	001
OUTP_78	AR22	XPT_OUT010P	001
OUTM_78	AR23	XPT_OUT010N	001
OUTP_79	AV22	XPT_OUT020P	001
OUTM_79	AV23	XPT_OUT020N	001

IC1401 (7/15) M21165G-11

OUTP_80	D23	XPT_OUT141P	001
OUTM_80	D22	XPT_OUT141N	001
OUTP_81	A23	XPT_OUT151P	001
OUTM_81	A22	XPT_OUT151N	001
OUTP_82	D20	XPT_OUT109P	001
OUTM_82	D19	XPT_OUT109N	001
OUTP_83	B21	XPT_OUT120P	001
OUTM_83	B20	XPT_OUT120N	001
OUTP_84	AY21	XPT_OUT061P	001
OUTM_84	AY22	XPT_OUT061N	001
OUTP_85	BC21	XPT_OUT071P	001
OUTM_85	BC22	XPT_OUT071N	001
OUTP_86	BA19	XPT_OUT062P	001
OUTM_86	BA20	XPT_OUT062N	001
OUTP_87	BD19	XPT_OUT072P	001
OUTM_87	BD20	XPT_OUT072N	001
OUTP_88	K23	XPT_OUT088P	001
OUTM_88	K22	XPT_OUT088N	001
OUTP_89	G23	XPT_OUT100P	001
OUTM_89	G22	XPT_OUT100N	001
OUTP_90	L21	XPT_OUT087P	001
OUTM_90	L20	XPT_OUT087N	001
OUTP_91	H21	XPT_OUT099P	001
OUTM_91	H20	XPT_OUT099N	001
OUTP_92	AP21	XPT_OUT041P	001
OUTM_92	AP22	XPT_OUT041N	001
OUTP_93	AU21	XPT_OUT051P	001
OUTM_93	AU22	XPT_OUT051N	001
OUTP_94	AR19	XPT_OUT042P	001
OUTM_94	AR20	XPT_OUT042N	001
OUTP_95	AV19	XPT_OUT052P	001
OUTM_95	AV20	XPT_OUT052N	001
OUTP_96	E21	XPT_OUT110P	001
OUTM_96	E20	XPT_OUT110N	001
OUTP_97	A20	XPT_OUT119P	001
OUTM_97	A19	XPT_OUT119N	001
OUTP_98	D17	XPT_OUT107P	001
OUTM_98	D16	XPT_OUT107N	001
OUTP_99	B18	XPT_OUT118P	001
OUTM_99	B17	XPT_OUT118N	001
OUTP_100	AY18	XPT_OUT063P	001
OUTM_100	AY19	XPT_OUT063N	001
OUTP_101	BC18	XPT_OUT073P	001
OUTM_101	BC19	XPT_OUT073N	001
OUTP_102	BA16	XPT_OUT064P	001
OUTM_102	BA17	XPT_OUT064N	001
OUTP_103	BD16	XPT_OUT074P	001
OUTM_103	BD17	XPT_OUT074N	001
OUTP_104	K20	XPT_OUT086P	001
OUTM_104	K19	XPT_OUT086N	001
OUTP_105	G20	XPT_OUT098P	001
OUTM_105	G19	XPT_OUT098N	001
OUTP_106	H18	XPT_OUT097P	001
OUTM_106	H17	XPT_OUT097N	001
OUTP_107	E18	XPT_OUT108P	001
OUTM_107	E17	XPT_OUT108N	001
OUTP_108	AP18	XPT_OUT043P	001
OUTM_108	AP19	XPT_OUT043N	001
OUTP_109	AU18	XPT_OUT053P	001
OUTM_109	AU19	XPT_OUT053N	001
OUTP_110	AR16	XPT_OUT044P	001
OUTM_110	AR17	XPT_OUT044N	001
OUTP_111	AV16	XPT_OUT054P	001
OUTM_111	AV17	XPT_OUT054N	001
OUTP_112	D14	XPT_OUT105P	001
OUTM_112	D13	XPT_OUT105N	001
OUTP_113	A17	XPT_OUT117P	001
OUTM_113	A16	XPT_OUT117N	001
OUTP_114	B12	XPT_OUT114P	001
OUTM_114	B11	XPT_OUT114N	001
OUTP_115	B15	XPT_OUT116P	001
OUTM_115	B14	XPT_OUT116N	001
OUTP_116	BC9	XPT_OUT079P	001
OUTM_116	BC10	XPT_OUT079N	001
OUTP_117	BC15	XPT_OUT075P	001
OUTM_117	BC16	XPT_OUT075N	001
OUTP_118	BA13	XPT_OUT066P	001
OUTM_118	BA14	XPT_OUT066N	001
OUTP_119	BD13	XPT_OUT076P	001
OUTM_119	BD14	XPT_OUT076N	001

IC1401 (8/15) M21165G-11

OUTP_120	L18	XPT_OUT085P	001
OUTM_120	L17	XPT_OUT085N	001
OUTP_121	G17	XPT_OUT096P	001
OUTM_121	G16	XPT_OUT096N	001
OUTP_122	K17	XPT_OUT084P	001
OUTM_122	K16	XPT_OUT084N	001
OUTP_123	E15	XPT_OUT106P	001
OUTM_123	E14	XPT_OUT106N	001
OUTP_124	AU15	XPT_OUT055P	001
OUTM_124	AU16	XPT_OUT055N	001
OUTP_125	AY15	XPT_OUT065P	001
OUTM_125	AY16	XPT_OUT065N	001
OUTP_126	AP15	XPT_OUT045P	001
OUTM_126	AP16	XPT_OUT045N	001
OUTP_127	AV13	XPT_OUT056P	001
OUTM_127	AV14	XPT_OUT056N	001
OUTP_128	D11	XPT_OUT103P	001
OUTM_128	D10	XPT_OUT103N	001
OUTP_129	A14	XPT_OUT115P	001
OUTM_129	A13	XPT_OUT115N	001
OUTP_130	B9	XPT_OUT112P	001
OUTM_130	B8	XPT_OUT112N	001
OUTP_131	A11	XPT_OUT113P	001
OUTM_131	A10	XPT_OUT113N	001
OUTP_132	BC6	XPT_OUT049P	001
OUTM_132	BC7	XPT_OUT049N	001
OUTP_133	BC12	XPT_OUT077P	001
OUTM_133	BC13	XPT_OUT077N	001
OUTP_134	BA10	XPT_OUT068P	001
OUTM_134	BA11	XPT_OUT068N	001
OUTP_135	BD10	XPT_OUT078P	001
OUTM_135	BD11	XPT_OUT078N	001
OUTP_136	H15	XPT_OUT095P	001
OUTM_136	H14	XPT_OUT095N	001
OUTP_137	G14	XPT_OUT094P	001
OUTM_137	G13	XPT_OUT094N	001
OUTP_138	L15	XPT_OUT083P	001
OUTM_138	L14	XPT_OUT083N	001
OUTP_139	E12	XPT_OUT104P	001
OUTM_139	E11	XPT_OUT104N	001
OUTP_140	AU12	XPT_OUT057P	001
OUTM_140	AU13	XPT_OUT057N	001
OUTP_141	AY12	XPT_OUT067P	001
OUTM_141	AY13	XPT_OUT067N	001
OUTP_142	AR13	XPT_OUT046P	001
OUTM_142	AR14	XPT_OUT046N	001
OUTP_143	AV10	XPT_OUT048P	001
OUTM_143	AV11	XPT_OUT048N	001
OUTP_144	D8	XPT_OUT101P	001
OUTM_144	D7	XPT_OUT101N	001
OUTP_145	A8	XPT_OUT111P	001
OUTM_145	A7	XPT_OUT111N	001
OUTP_146	B6	XPT_OUT081P	001
OUTM_146	B5	XPT_OUT081N	001
OUTP_147	A5	XPT_OUT091P	001
OUTM_147	A4	XPT_OUT091N	001
OUTP_148	BC3	XPT_OUT050P	001
OUTM_148	BC4	XPT_OUT050N	001
OUTP_149	BD7	XPT_OUT080P	001
OUTM_149	BD8	XPT_OUT080N	001
OUTP_150	BA7	XPT_OUT070P	001
OUTM_150	BA8	XPT_OUT070N	001
OUTP_151	BD4	XPT_OUT060P	001
OUTM_151	BD5	XPT_OUT060N	001
OUTP_152	K14	XPT_OUT082P	001
OUTM_152	K13	XPT_OUT082N	001
OUTP_153	G11	XPT_OUT092P	001
OUTM_153	G10	XPT_OUT092N	001
OUTP_154	H12	XPT_OUT093P	001
OUTM_154	H11	XPT_OUT093N	001
OUTP_155	E9	XPT_OUT102P	001
OUTM_155	E8	XPT_OUT102N	001
OUTP_156	AP12	XPT_OUT047P	001
OUTM_156	AP13	XPT_OUT047N	001
OUTP_157	AY9	XPT_OUT069P	001
OUTM_157	AY10	XPT_OUT069N	001
OUTP_158	AU9	XPT_OUT058P	001
OUTM_158	AU10	XPT_OUT058N	001
OUTP_159	AY6	XPT_OUT059P	001
OUTM_159	AY7	XPT_OUT059N	001

XPT-31/31A (16/17)
BOARD NO. 1-879-570-13
MVS-8000X_XPT-31_013_16

XPT-31/31A (17/17)

SUFFIX: -13

XPT-31/31A (17/17)

SUFFIX: -13

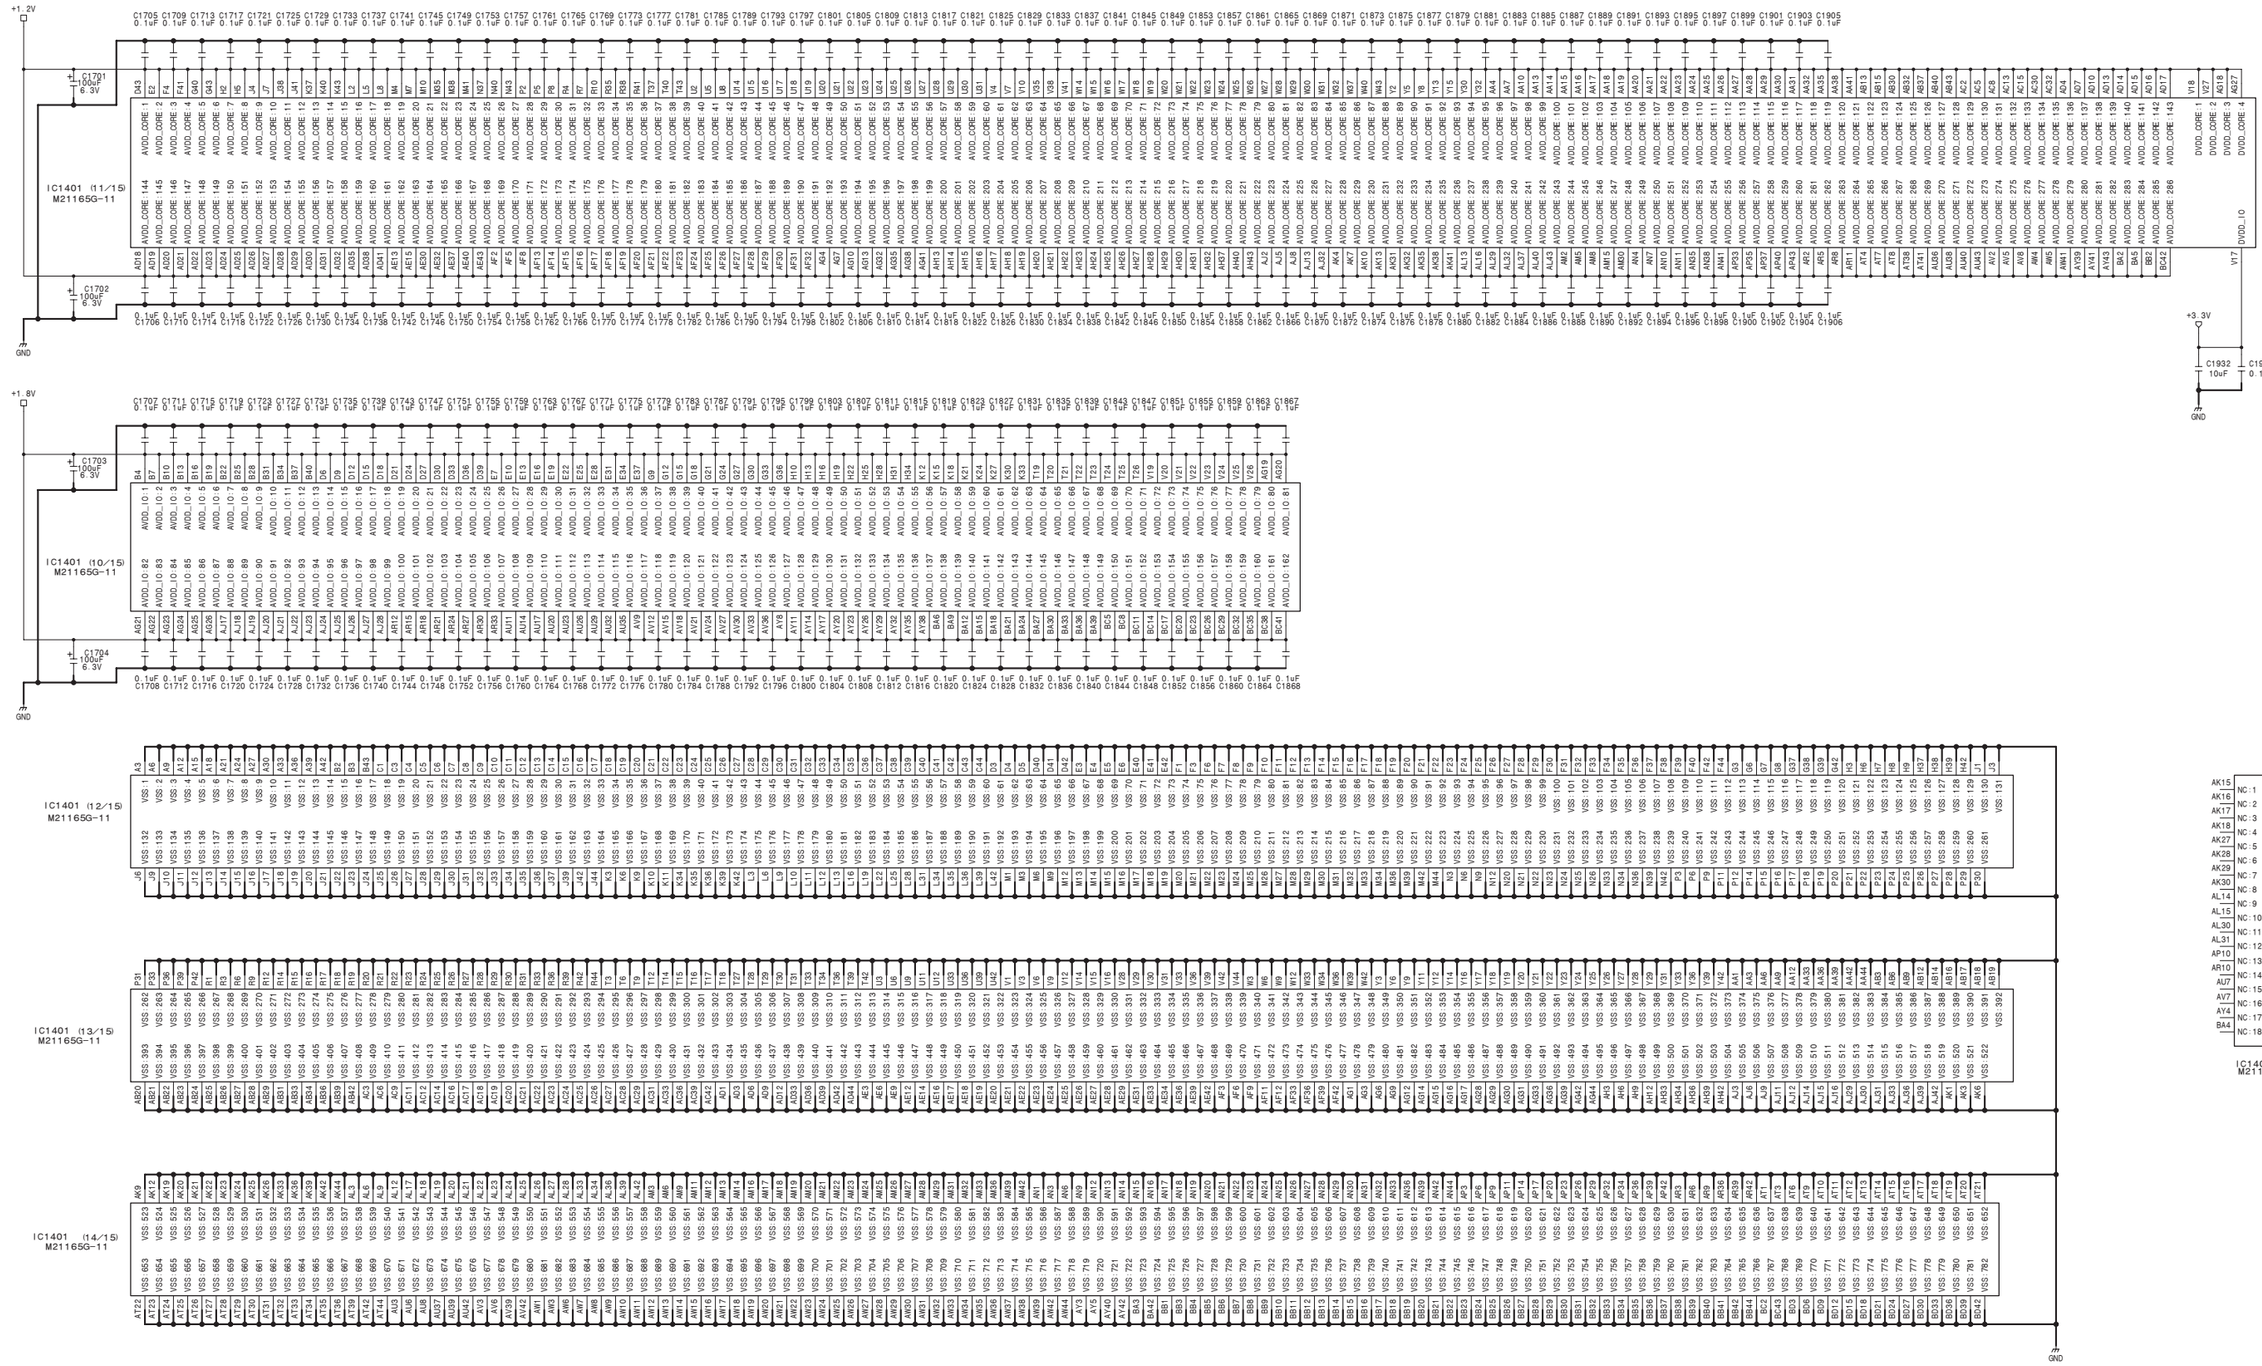

XPT-31/31A (17/17)

BOARD NO. 1-879-570-13

MVS-8000X_XPT-31_013_17

XPT-31/31A (1/17)

SUFFIX: -14

XPT-31/31A (1/17)

SUFFIX: -14

Leftmost

CNB1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V	+12V
4												
5	RESET	DC_ENBL	GND	mX for CN11	FUSE+12V	GND			GND			GND
6	GND (BD_EXT_SLF)		GND	CN1_I2C_SCL	CN1_I2C_SDA	GND	I NET_TRX0P	I NET_TRX0N	GND	I NET_TRX1P	I NET_TRX1N	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND	I NET_TRX2P	I NET_TRX2N	GND	I NET_TRX3P	I NET_TRX3N	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND			GND			GND
9	VCLKP	VCLKN	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND			GND			GND
10	FDP	FDN	GND	VDP	VDN	GND			GND			GND

CNC1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	ADRS1	ADRS2	GND	ADRS3	ADRS4	GND	CLK0p	CLK0n	GND	CSA0n	CSB0n	GND
2	ADRS5	ADRS6	GND	ADRS7	ADRS8	GND	CLK1p	CLK1n	GND	CSA1n	CSB1n	GND
3	ADRS9	ADRS10	GND	ADRS11	ADRS12	GND	CLK2p	CLK2n	GND	CSA2n	CSB2n	GND
4	ADRS13	ADRS14	GND	ADRS15	ADRS16	GND	CLK3p	CLK3n	GND	CSA3n	CSB3n	GND
5	DATA0	DATA1	GND	DATA2	DATA3	GND	CLK4p	CLK4n	GND	CSA4n	CSB4n	GND
6	DATA4	DATA5	GND	DATA6	DATA7	GND	CLK5p	CLK5n	GND	CSA5n	CSB5n	GND
7	DATA8	DATA9	GND	DATA10	DATA11	GND	WE0n	WE1n	GND	WAIT0n	WAIT1n	GND
8	DATA12	DATA13	GND	DATA14	DATA15	GND	WE2n	WE3n	GND	WAIT2n	WAIT3n	GND
9	CLK_INp	CLK_INn	GND	CSA_INn	CSB_INn	GND	WE4n	WE5n	GND	WAIT4n	WAIT5n	GND
10	WE_INn	WAIT_OUTn	GND	OE_INn	RESET_INn	GND	OEn	RESET0n	GND	RESET1n	RESET2n	GND

CND1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN001P	XPT_IN001N	GND	XPT_IN011P	XPT_IN011N	GND	XPT_IN021P	XPT_IN021N	GND	XPT_IN031P	XPT_IN031N	GND
2	XPT_IN002P	XPT_IN002N	GND	XPT_IN012P	XPT_IN012N	GND	XPT_IN022P	XPT_IN022N	GND	XPT_IN032P	XPT_IN032N	GND
3	XPT_IN003P	XPT_IN003N	GND	XPT_IN013P	XPT_IN013N	GND	XPT_IN023P	XPT_IN023N	GND	XPT_IN033P	XPT_IN033N	GND
4	XPT_IN004P	XPT_IN004N	GND	XPT_IN014P	XPT_IN014N	GND	XPT_IN024P	XPT_IN024N	GND	XPT_IN034P	XPT_IN034N	GND
5	XPT_IN005P	XPT_IN005N	GND	XPT_IN015P	XPT_IN015N	GND	XPT_IN025P	XPT_IN025N	GND	XPT_IN035P	XPT_IN035N	GND
6	XPT_IN006P	XPT_IN006N	GND	XPT_IN016P	XPT_IN016N	GND	XPT_IN026P	XPT_IN026N	GND	XPT_IN036P	XPT_IN036N	GND
7	XPT_IN007P	XPT_IN007N	GND	XPT_IN017P	XPT_IN017N	GND	XPT_IN027P	XPT_IN027N	GND	XPT_IN037P	XPT_IN037N	GND
8	XPT_IN008P	XPT_IN008N	GND	XPT_IN018P	XPT_IN018N	GND	XPT_IN028P	XPT_IN028N	GND	XPT_IN038P	XPT_IN038N	GND
9	XPT_IN009P	XPT_IN009N	GND	XPT_IN019P	XPT_IN019N	GND	XPT_IN029P	XPT_IN029N	GND	XPT_IN039P	XPT_IN039N	GND
10	XPT_IN010P	XPT_IN010N	GND	XPT_IN020P	XPT_IN020N	GND	XPT_IN030P	XPT_IN030N	GND	XPT_IN040P	XPT_IN040N	GND

CNE1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN041P	XPT_IN041N	GND	XPT_IN051P	XPT_IN051N	GND	XPT_IN061P	XPT_IN061N	GND	XPT_IN071P	XPT_IN071N	GND
2	XPT_IN042P	XPT_IN042N	GND	XPT_IN052P	XPT_IN052N	GND	XPT_IN062P	XPT_IN062N	GND	XPT_IN072P	XPT_IN072N	GND
3	XPT_IN043P	XPT_IN043N	GND	XPT_IN053P	XPT_IN053N	GND	XPT_IN063P	XPT_IN063N	GND	XPT_IN073P	XPT_IN073N	GND
4	XPT_IN044P	XPT_IN044N	GND	XPT_IN054P	XPT_IN054N	GND	XPT_IN064P	XPT_IN064N	GND	XPT_IN074P	XPT_IN074N	GND
5	XPT_IN045P	XPT_IN045N	GND	XPT_IN055P	XPT_IN055N	GND	XPT_IN065P	XPT_IN065N	GND	XPT_IN075P	XPT_IN075N	GND
6	XPT_IN046P	XPT_IN046N	GND	XPT_IN056P	XPT_IN056N	GND	XPT_IN066P	XPT_IN066N	GND	XPT_IN076P	XPT_IN076N	GND
7	XPT_IN047P	XPT_IN047N	GND	XPT_IN057P	XPT_IN057N	GND	XPT_IN067P	XPT_IN067N	GND	XPT_IN077P	XPT_IN077N	GND
8	XPT_IN048P	XPT_IN048N	GND	XPT_IN058P	XPT_IN058N	GND	XPT_IN068P	XPT_IN068N	GND	XPT_IN078P	XPT_IN078N	GND
9	XPT_IN049P	XPT_IN049N	GND	XPT_IN059P	XPT_IN059N	GND	XPT_IN069P	XPT_IN069N	GND	XPT_IN079P	XPT_IN079N	GND
10	XPT_IN050P	XPT_IN050N	GND	XPT_IN060P	XPT_IN060N	GND	XPT_IN070P	XPT_IN070N	GND	XPT_IN080P	XPT_IN080N	GND

CNG1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT001P	XPT_OUT001N	GND	XPT_OUT011P	XPT_OUT011N	GND	XPT_OUT021P	XPT_OUT021N	GND	XPT_OUT031P	XPT_OUT031N	GND
2	XPT_OUT002P	XPT_OUT002N	GND	XPT_OUT012P	XPT_OUT012N	GND	XPT_OUT022P	XPT_OUT022N	GND	XPT_OUT032P	XPT_OUT032N	GND
3	XPT_OUT003P	XPT_OUT003N	GND	XPT_OUT013P	XPT_OUT013N	GND	XPT_OUT023P	XPT_OUT023N	GND	XPT_OUT033P	XPT_OUT033N	GND
4	XPT_OUT004P	XPT_OUT004N	GND	XPT_OUT014P	XPT_OUT014N	GND	XPT_OUT024P	XPT_OUT024N	GND	XPT_OUT034P	XPT_OUT034N	GND
5	XPT_OUT005P	XPT_OUT005N	GND	XPT_OUT015P	XPT_OUT015N	GND	XPT_OUT025P	XPT_OUT025N	GND	XPT_OUT035P	XPT_OUT035N	GND
6	XPT_OUT006P	XPT_OUT006N	GND	XPT_OUT016P	XPT_OUT016N	GND	XPT_OUT026P	XPT_OUT026N	GND	XPT_OUT036P	XPT_OUT036N	GND
7	XPT_OUT007P	XPT_OUT007N	GND	XPT_OUT017P	XPT_OUT017N	GND	XPT_OUT027P	XPT_OUT027N	GND	XPT_OUT037P	XPT_OUT037N	GND
8	XPT_OUT008P	XPT_OUT008N	GND	XPT_OUT018P	XPT_OUT018N	GND	XPT_OUT028P	XPT_OUT028N	GND	XPT_OUT038P	XPT_OUT038N	GND
9	XPT_OUT009P	XPT_OUT009N	GND	XPT_OUT019P	XPT_OUT019N	GND	XPT_OUT029P	XPT_OUT029N	GND	XPT_OUT039P	XPT_OUT039N	GND
10	XPT_OUT010P	XPT_OUT01ON	GND	XPT_OUT020P	XPT_OUT020N	GND	XPT_OUT030P	XPT_OUT030N	GND	XPT_OUT040P	XPT_OUT040N	GND

CNJ1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT041P	XPT_OUT041N	GND	XPT_OUT051P	XPT_OUT051N	GND	XPT_OUT061P	XPT_OUT061N	GND	XPT_OUT071P	XPT_OUT071N	GND
2	XPT_OUT042P	XPT_OUT042N	GND	XPT_OUT052P	XPT_OUT052N	GND	XPT_OUT062P	XPT_OUT062N	GND	XPT_OUT072P	XPT_OUT072N	GND
3	XPT_OUT043P	XPT_OUT043N	GND	XPT_OUT053P	XPT_OUT053N	GND	XPT_OUT063P	XPT_OUT063N	GND	XPT_OUT073P	XPT_OUT073N	GND
4	XPT_OUT044P	XPT_OUT044N	GND	XPT_OUT054P	XPT_OUT054N	GND	XPT_OUT064P	XPT_OUT064N	GND	XPT_OUT074P	XPT_OUT074N	GND
5	XPT_OUT045P	XPT_OUT045N	GND	XPT_OUT055P	XPT_OUT055N	GND	XPT_OUT065P	XPT_OUT065N	GND	XPT_OUT075P	XPT_OUT075N	GND
6	XPT_OUT046P	XPT_OUT046N	GND	XPT_OUT056P	XPT_OUT056N	GND	XPT_OUT066P	XPT_OUT066N	GND	XPT_OUT076P	XPT_OUT076N	GND
7	XPT_OUT047P	XPT_OUT047N	GND	XPT_OUT057P	XPT_OUT057N	GND	XPT_OUT067P	XPT_OUT067N	GND	XPT_OUT077P	XPT_OUT077N	GND
8	XPT_OUT048P	XPT_OUT048N	GND	XPT_OUT058P	XPT_OUT058N	GND	XPT_OUT068P	XPT_OUT068N	GND	XPT_OUT078P	XPT_OUT078N	GND
9	XPT_OUT049P	XPT_OUT049N	GND	XPT_OUT059P	XPT_OUT059N	GND	XPT_OUT069P	XPT_OUT069N	GND	XPT_OUT079P	XPT_OUT079N	GND
10	XPT_OUT050P	XPT_OUT050N	GND	XPT_OUT060P	XPT_OUT060N	GND	XPT_OUT070P	XPT_OUT070N	GND	XPT_OUT080P	XPT_OUT080N	GND

CNK1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN081P	XPT_IN081N	GND	XPT_IN091P	XPT_IN091N	GND	XPT_IN101P	XPT_IN101N	GND	XPT_IN111P	XPT_IN111N	GND
2	XPT_IN082P	XPT_IN082N	GND	XPT_IN092P	XPT_IN092N	GND	XPT_IN102P	XPT_IN102N	GND	XPT_IN112P	XPT_IN112N	GND
3	XPT_IN083P	XPT_IN083N	GND	XPT_IN093P	XPT_IN093N	GND	XPT_IN103P	XPT_IN103N	GND	XPT_IN113P	XPT_IN113N	GND
4	XPT_IN084P	XPT_IN084N	GND	XPT_IN094P	XPT_IN094N	GND	XPT_IN104P	XPT_IN104N	GND	XPT_IN114P	XPT_IN114N	GND
5	XPT_IN085P	XPT_IN085N	GND	XPT_IN095P	XPT_IN095N	GND	XPT_IN105P	XPT_IN105N	GND	XPT_IN115P	XPT_IN115N	GND
6	XPT_IN086P	XPT_IN086N	GND	XPT_IN096P	XPT_IN096N	GND	XPT_IN106P	XPT_IN106N	GND	XPT_IN116P	XPT_IN116N	GND
7	XPT_IN087P	XPT_IN087N	GND	XPT_IN097P	XPT_IN097N	GND	XPT_IN107P	XPT_IN107N	GND	XPT_IN117P	XPT_IN117N	GND
8	XPT_IN088P	XPT_IN088N	GND	XPT_IN098P	XPT_IN098N	GND	XPT_IN108P	XPT_IN108N	GND	XPT_IN118P	XPT_IN118N	GND
9	XPT_IN089P	XPT_IN089N	GND	XPT_IN099P	XPT_IN099N	GND	XPT_IN109P	XPT_IN109N	GND	XPT_IN119P	XPT_IN119N	GND
10	XPT_IN090P	XPT_IN090N	GND	XPT_IN100P	XPT_IN100N	GND	XPT_IN110P	XPT_IN110N	GND	XPT_IN120P	XPT_IN120N	GND

CNL1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_IN121P	XPT_IN121N	GND	XPT_IN131P	XPT_IN131N	GND	XPT_IN141P	XPT_IN141N	GND	XPT_IN151P	XPT_IN151N	GND
2	XPT_IN122P	XPT_IN122N	GND	XPT_IN132P	XPT_IN132N	GND	XPT_IN142P	XPT_IN142N	GND	XPT_IN152P	XPT_IN152N	GND
3	XPT_IN123P	XPT_IN123N	GND	XPT_IN133P	XPT_IN133N	GND	XPT_IN143P	XPT_IN143N	GND	XPT_IN153P	XPT_IN153N	GND
4	XPT_IN124P	XPT_IN124N	GND	XPT_IN134P	XPT_IN134N	GND	XPT_IN144P	XPT_IN144N	GND	XPT_IN154P	XPT_IN154N	GND
5	XPT_IN125P	XPT_IN125N	GND	XPT_IN135P	XPT_IN135N	GND	XPT_IN145P	XPT_IN145N	GND	XPT_IN155P	XPT_IN155N	GND
6	XPT_IN126P	XPT_IN126N	GND	XPT_IN136P	XPT_IN136N	GND	XPT_IN146P	XPT_IN146N	GND	XPT_IN156P	XPT_IN156N	GND
7	XPT_IN127P	XPT_IN127N	GND	XPT_IN137P	XPT_IN137N	GND	XPT_IN147P	XPT_IN147N	GND	XPT_IN157P	XPT_IN157N	GND
8	XPT_IN128P	XPT_IN128N	GND	XPT_IN138P	XPT_IN138N	GND	XPT_IN148P	XPT_IN148N	GND	XPT_IN158P	XPT_IN158N	GND
9	XPT_IN129P	XPT_IN129N	GND	XPT_IN139P	XPT_IN139N	GND	XPT_IN149P	XPT_IN149N	GND	XPT_IN159P	XPT_IN159N	GND
10	XPT_IN130P	XPT_IN130N	GND	XPT_IN140P	XPT_IN140N	GND	XPT_IN150P	XPT_IN150N	GND	XPT_IN160P	XPT_IN160N	GND

CNM1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT081P	XPT_OUT081N	GND	XPT_OUT091P	XPT_OUT091N	GND	XPT_OUT101P	XPT_OUT101N	GND	XPT_OUT111P	XPT_OUT111N	GND
2	XPT_OUT082P	XPT_OUT082N	GND	XPT_OUT092P	XPT_OUT092N	GND	XPT_OUT102P	XPT_OUT102N	GND	XPT_OUT112P	XPT_OUT112N	GND
3	XPT_OUT083P	XPT_OUT083N	GND	XPT_OUT093P	XPT_OUT093N	GND	XPT_OUT103P	XPT_OUT103N	GND	XPT_OUT113P	XPT_OUT113N	GND
4	XPT_OUT084P	XPT_OUT084N	GND	XPT_OUT094P	XPT_OUT094N	GND	XPT_OUT104P	XPT_OUT104N	GND	XPT_OUT114P	XPT_OUT114N	GND
5	XPT_OUT085P	XPT_OUT085N	GND	XPT_OUT095P	XPT_OUT095N	GND	XPT_OUT105P	XPT_OUT105N	GND	XPT_OUT115P	XPT_OUT115N	GND
6	XPT_OUT086P	XPT_OUT086N	GND	XPT_OUT096P	XPT_OUT096N	GND	XPT_OUT106P	XPT_OUT106N	GND	XPT_OUT116P	XPT_OUT116N	GND
7	XPT_OUT087P	XPT_OUT087N	GND	XPT_OUT097P	XPT_OUT097N	GND	XPT_OUT107P	XPT_OUT107N	GND	XPT_OUT117P	XPT_OUT117N	GND
8	XPT_OUT088P	XPT_OUT088N	GND	XPT_OUT098P	XPT_OUT098N	GND	XPT_OUT108P	XPT_OUT108N	GND	XPT_OUT118P	XPT_OUT118N	GND
9	XPT_OUT089P	XPT_OUT089N	GND	XPT_OUT099P	XPT_OUT099N	GND	XPT_OUT109P	XPT_OUT109N	GND	XPT_OUT119P	XPT_OUT119N	GND
10	XPT_OUT090P	XPT_OUT090N	GND	XPT_OUT100P	XPT_OUT100N	GND	XPT_OUT110P	XPT_OUT110N	GND	XPT_OUT120P	XPT_OUT120N	GND

CNP1

	A	B	BG	C	D	DG	E	F	FG	G	H	HG
1	XPT_OUT121P	XPT_OUT121N	GND	XPT_OUT131P	XPT_OUT131N	GND	XPT_OUT141P	XPT_OUT141N	GND	XPT_OUT151P	XPT_OUT151N	GND
2	XPT_OUT122P	XPT_OUT122N	GND	XPT_OUT132P	XPT_OUT132N	GND	XPT_OUT142P	XPT_OUT142N	GND	XPT_OUT152P	XPT_OUT152N	GND
3	XPT_OUT123P	XPT_OUT123N	GND	XPT_OUT133P	XPT_OUT133N	GND	XPT_OUT143P	XPT_OUT143N	GND	XPT_OUT153P	XPT_OUT153N	GND
4	XPT_OUT124P	XPT_OUT124N	GND	XPT_OUT134P	XPT_OUT134N	GND	XPT_OUT144P	XPT_OUT144N	GND	XPT_OUT154P	XPT_OUT154N	GND
5	XPT_OUT125P	XPT_OUT125N	GND	XPT_OUT135P	XPT_OUT135N	GND	XPT_OUT145P	XPT_OUT145N	GND	XPT_OUT155P	XPT_OUT155N	GND
6	XPT_OUT126P	XPT_OUT126N	GND	XPT_OUT136P	XPT_OUT136N	GND	XPT_OUT146P	XPT_OUT146N	GND	XPT_OUT156P	XPT_OUT156N	GND
7	XPT_OUT127P	XPT_OUT127N	GND	XPT_OUT137P	XPT_OUT137N	GND	XPT_OUT147P	XPT_OUT147N	GND	XPT_OUT157P	XPT_OUT157N	GND
8	XPT_OUT128P	XPT_OUT128N	GND	XPT_OUT138P	XPT_OUT138N	GND	XPT_OUT148P	XPT_OUT148N	GND	XPT_OUT158P	XPT_OUT158N	GND
9	XPT_OUT129P	XPT_OUT129N	GND	XPT_OUT139P	XPT_OUT139N	GND	XPT_OUT149P	XPT_OUT149N	GND	XPT_OUT159P	XPT_OUT159N	GND
10	XPT_OUT130P	XPT_OUT130N	GND	XPT_OUT140P	XPT_OUT140N	GND	XPT_OUT150P	XPT_OUT150N	GND	XPT_OUT160P	XPT_OUT160N	GND

Rightmost

XPT-31/31A (1/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_1

A B C D E F G H

1 2 3 4 5

XPT-31/31A (2/17)

SUFFIX: -14

XPT-31/31A (2/17)

SUFFIX: -14

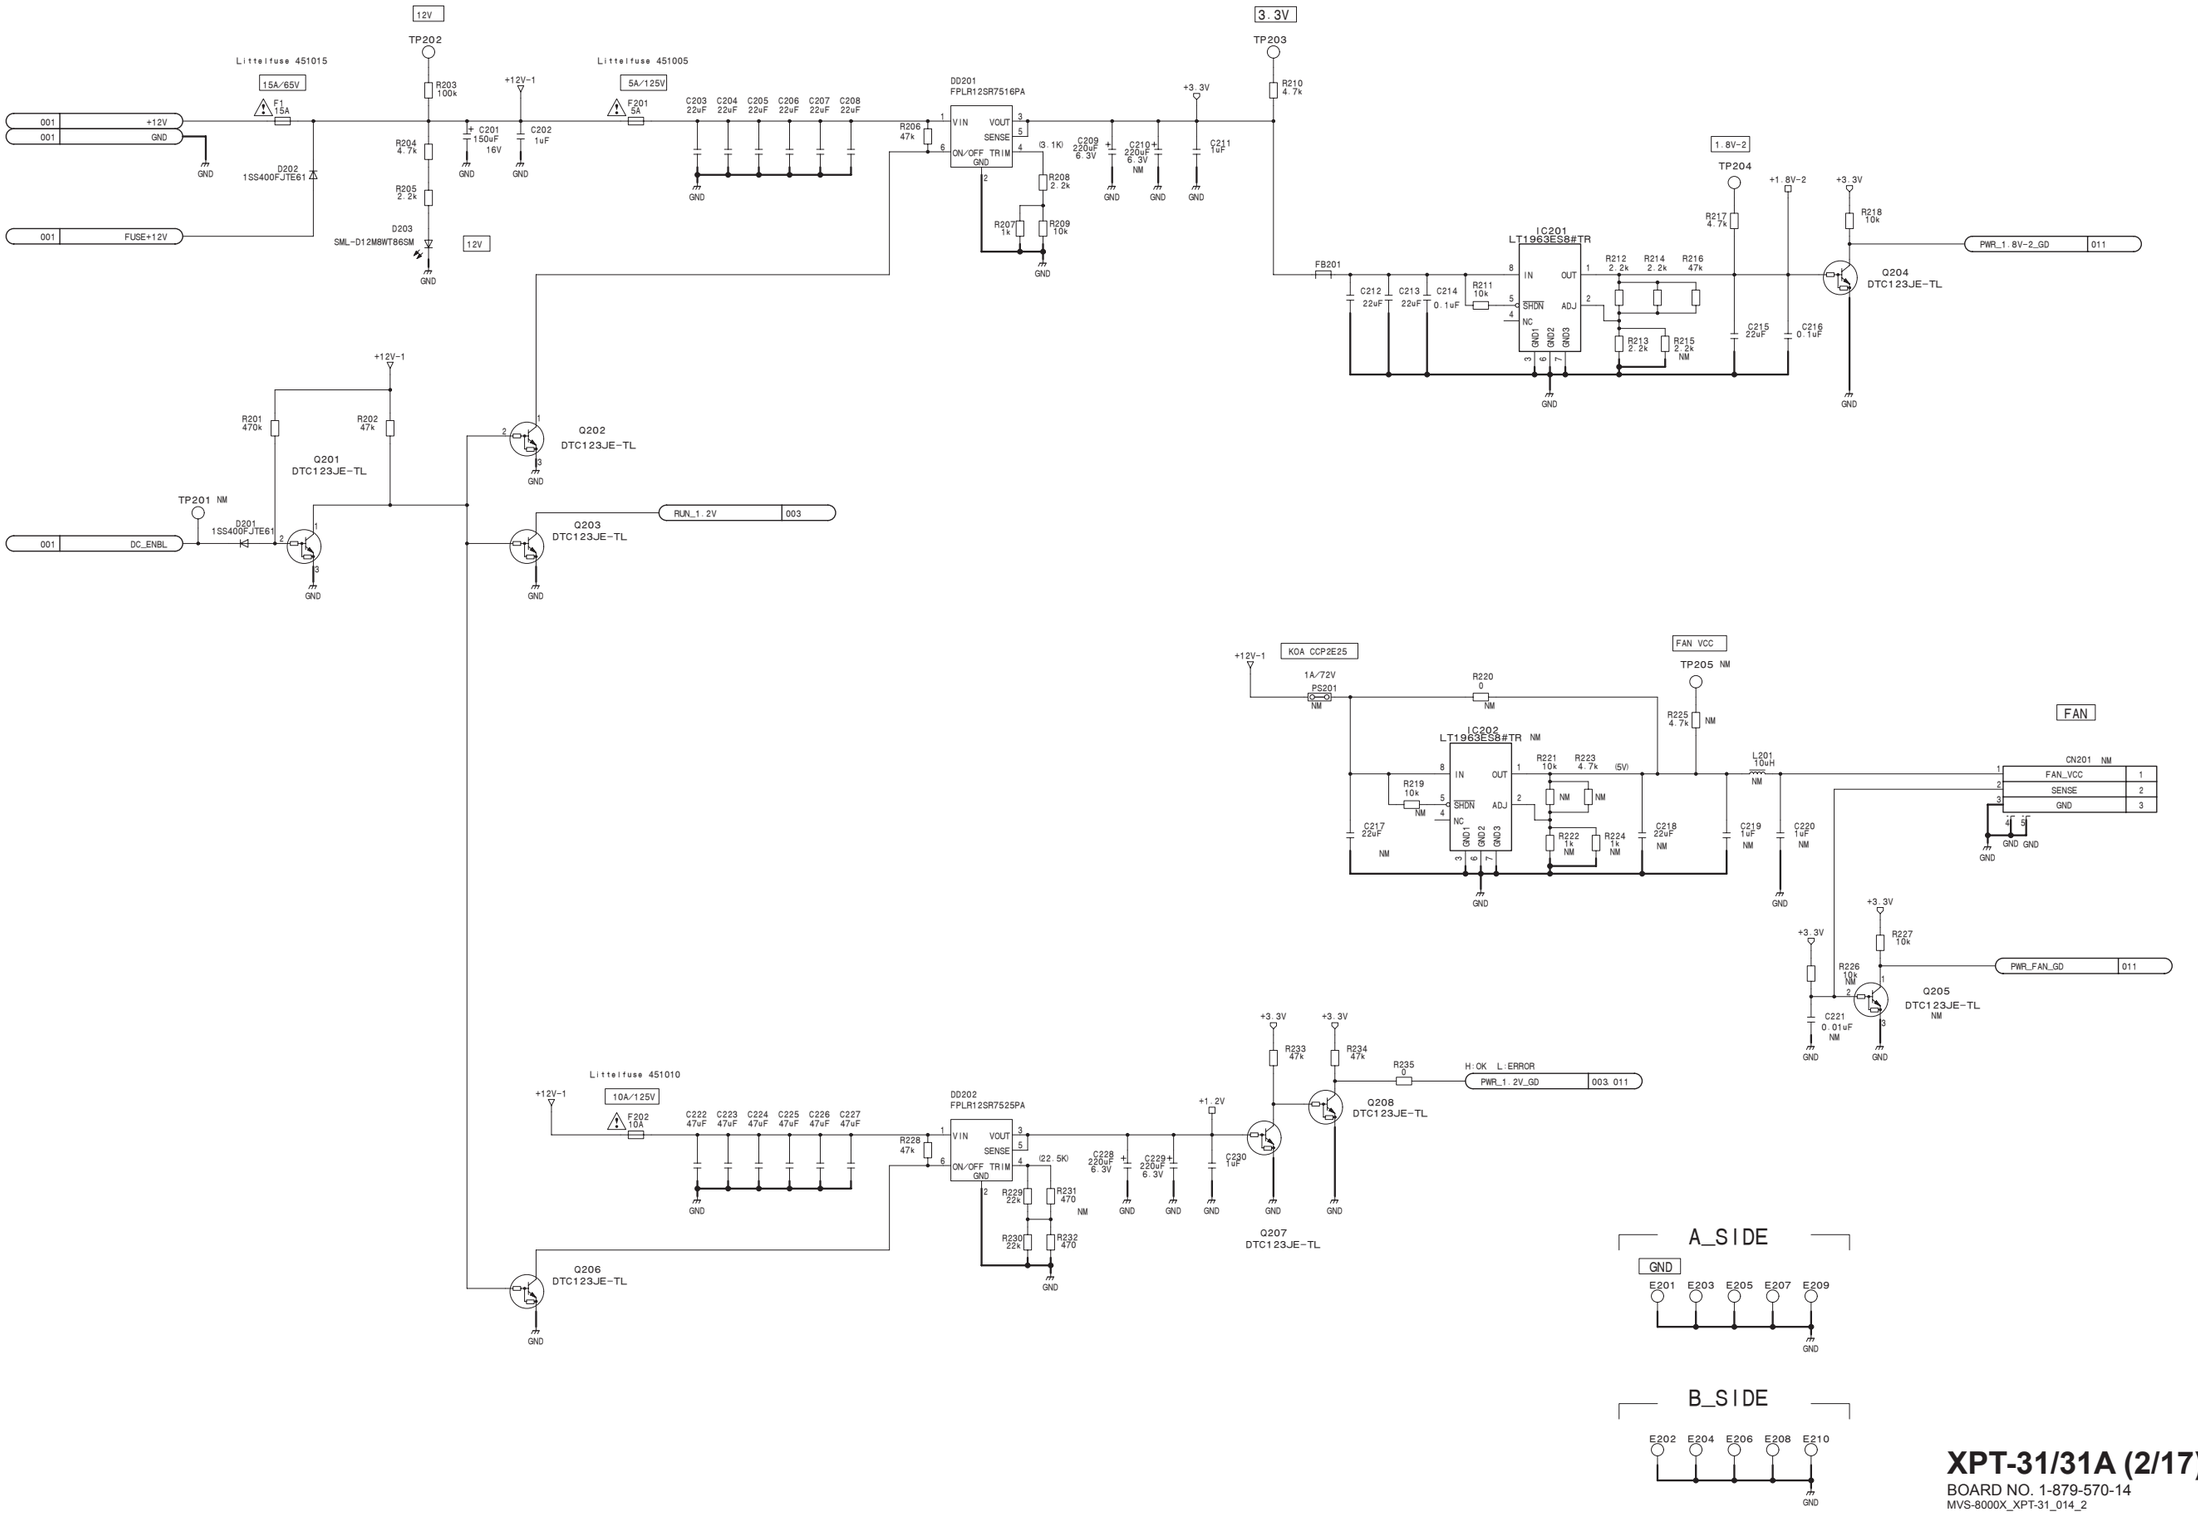

XPT-31/31A (2/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_2

XPT-31/31A (3/17)

SUFFIX: -14

XPT-31/31A (3/17)

SUFFIX: -14

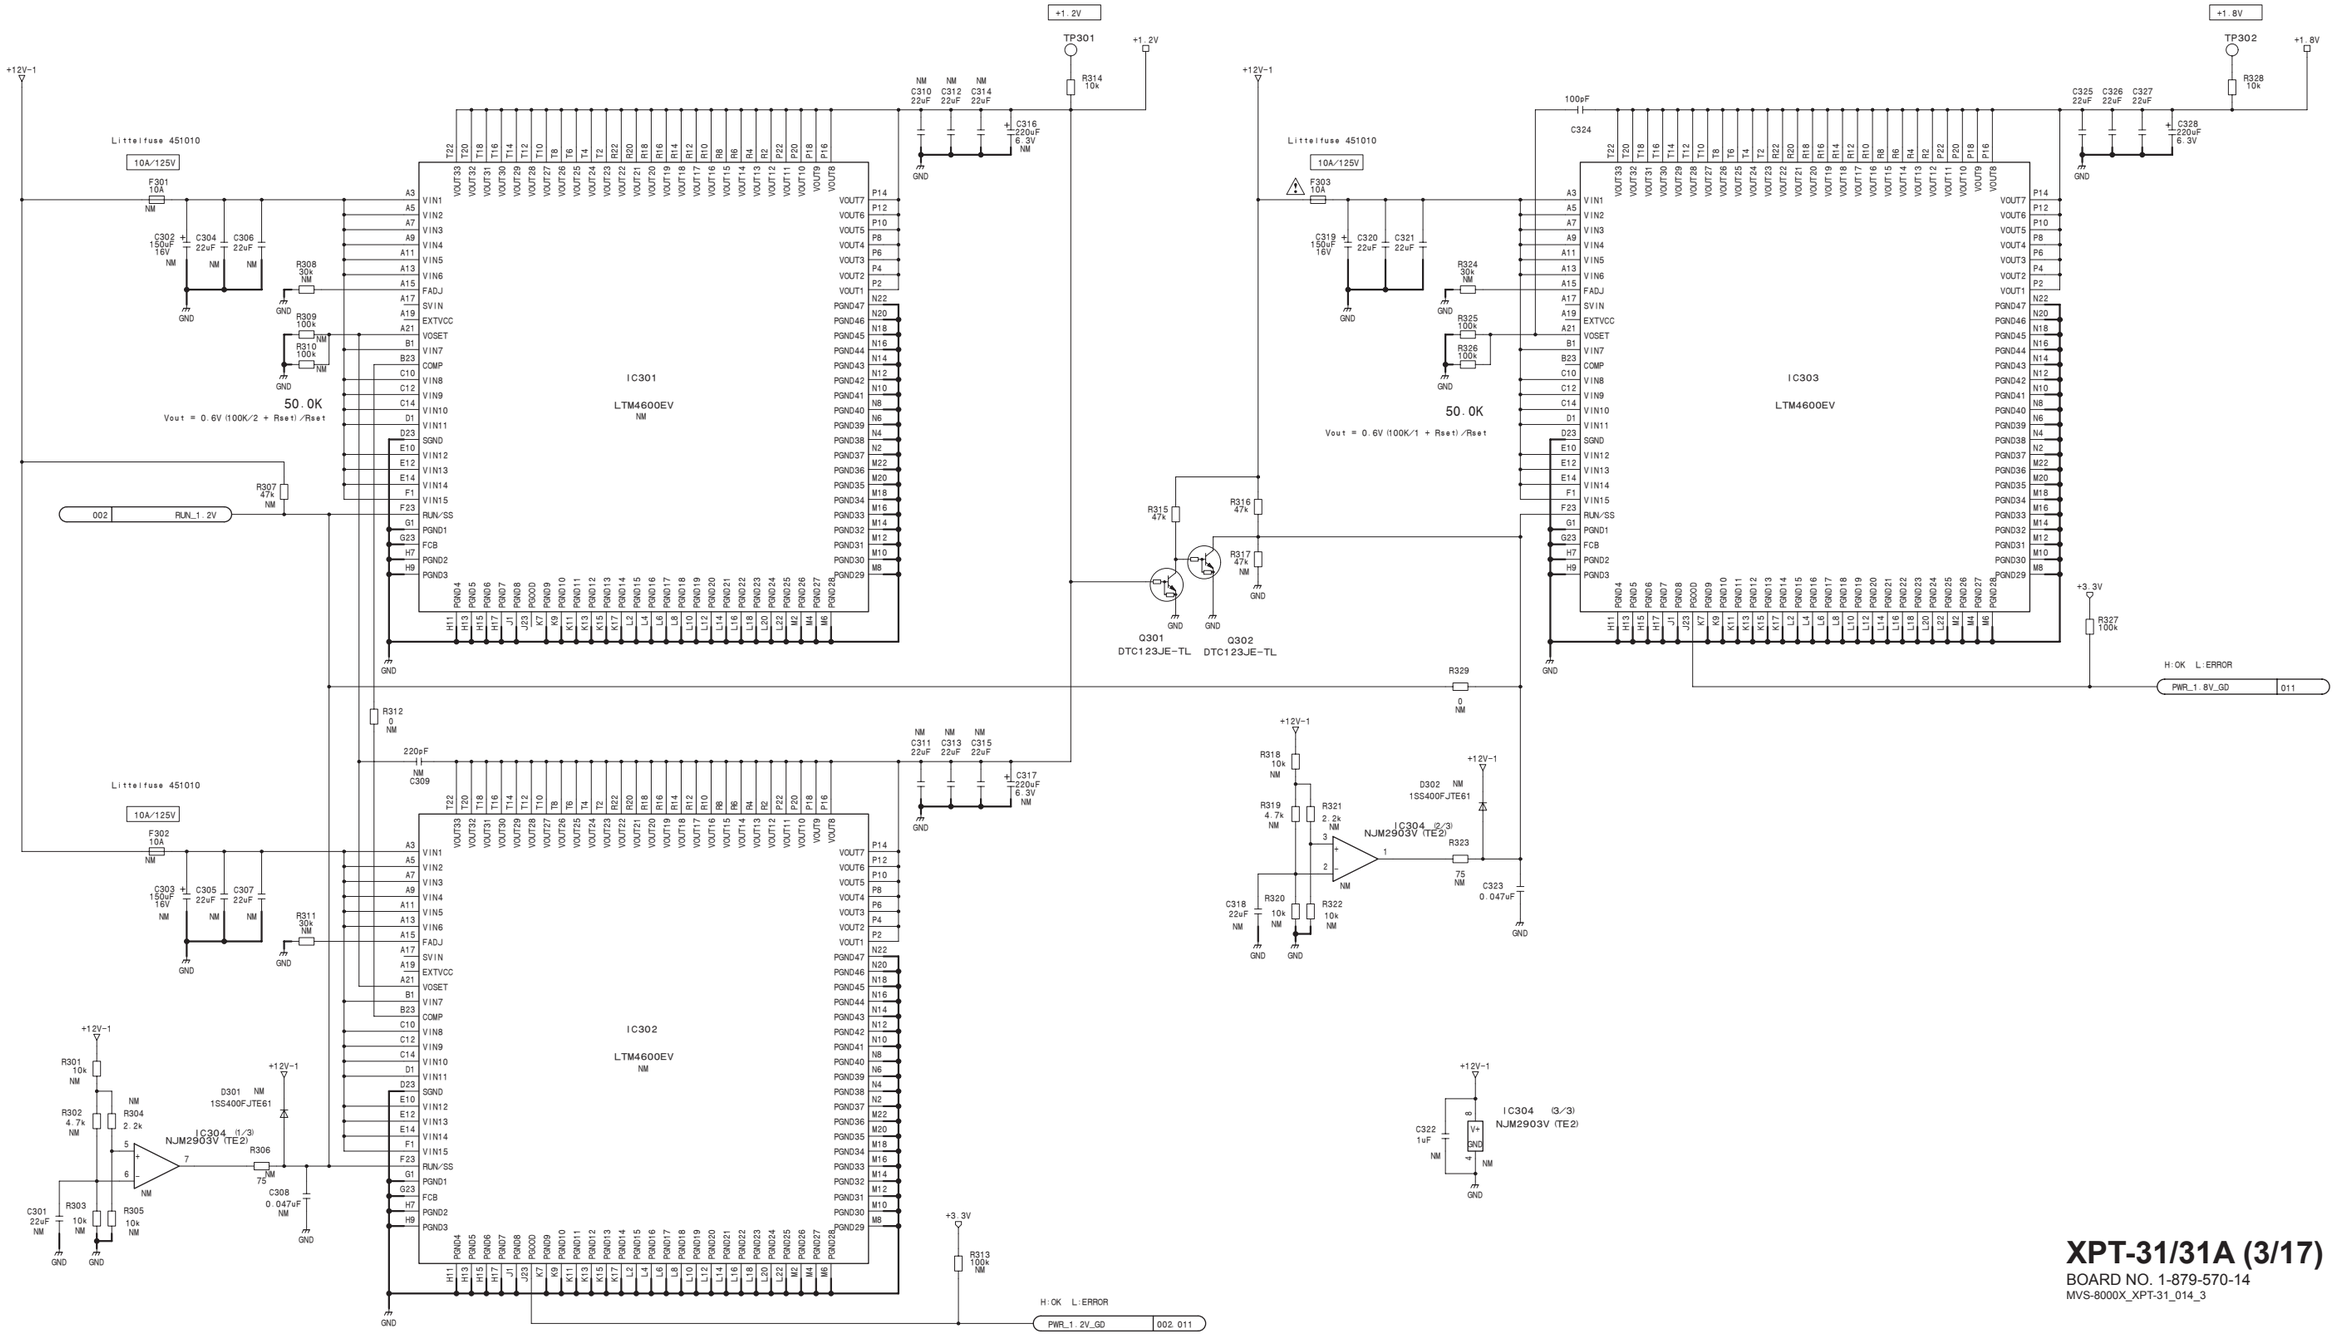

XPT-31/31A (3/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_3

XPT-31/31A (4/17)
SUFFIX: -14

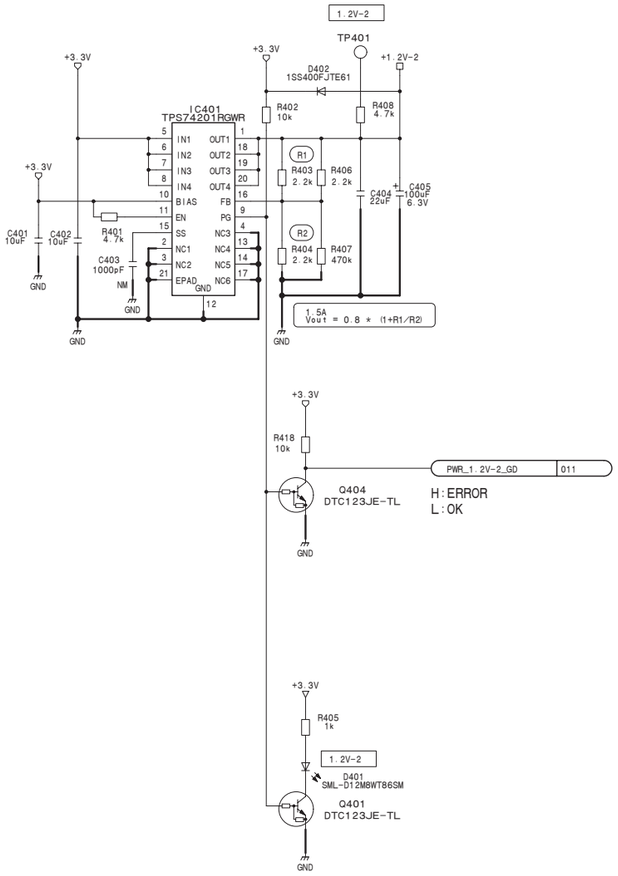

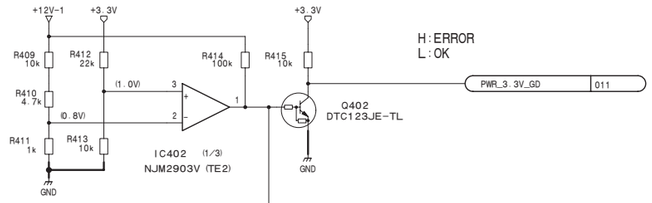



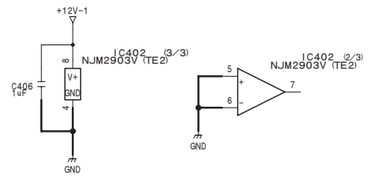

XPT-31/31A (4/17)
BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_4

XPT-31/31A (5/17)

SUFFIX: -14

XPT-31/31A (5/17)

SUFFIX: -14

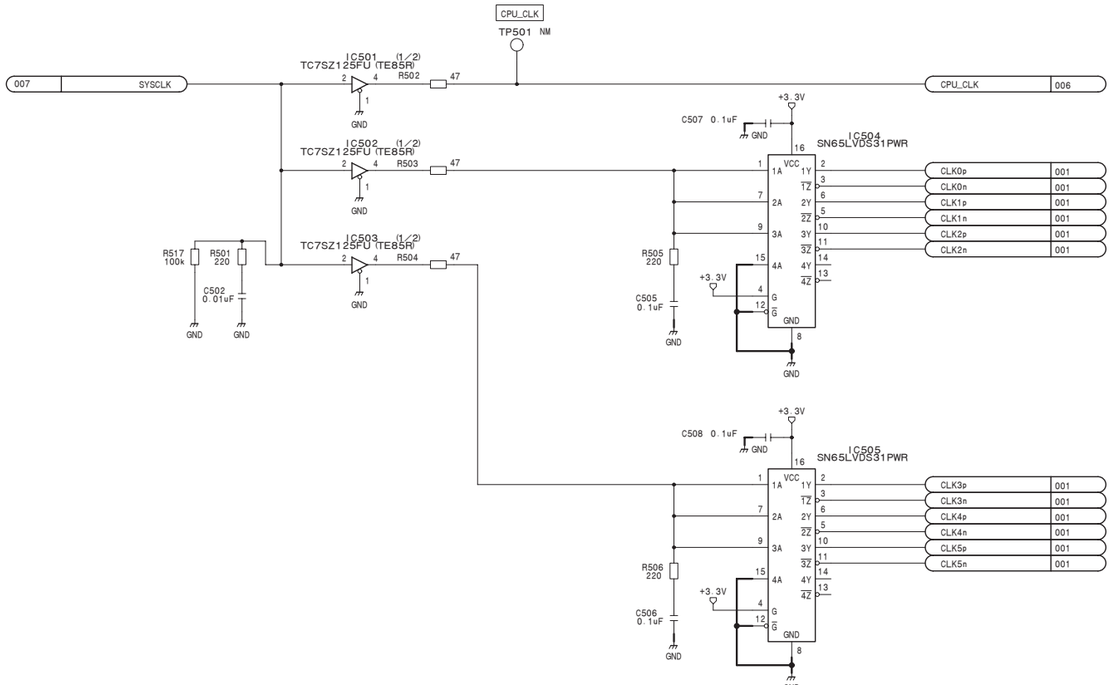

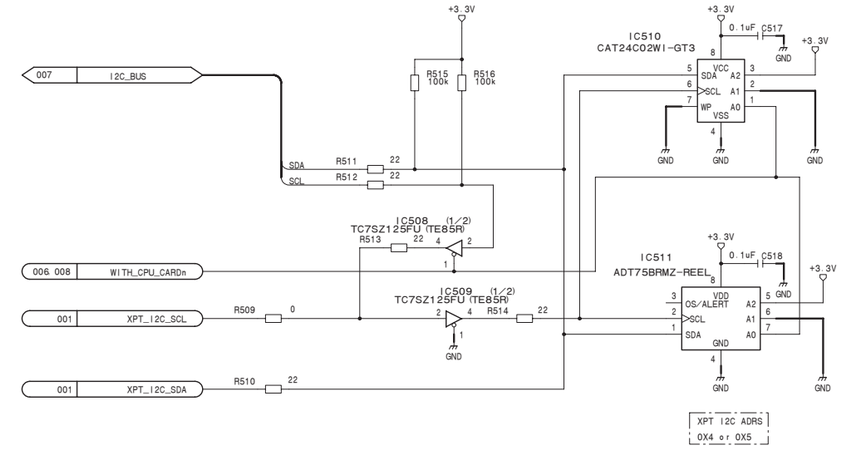

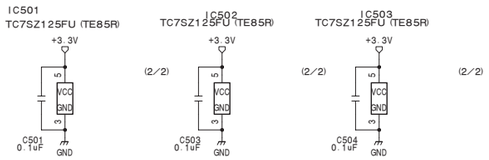

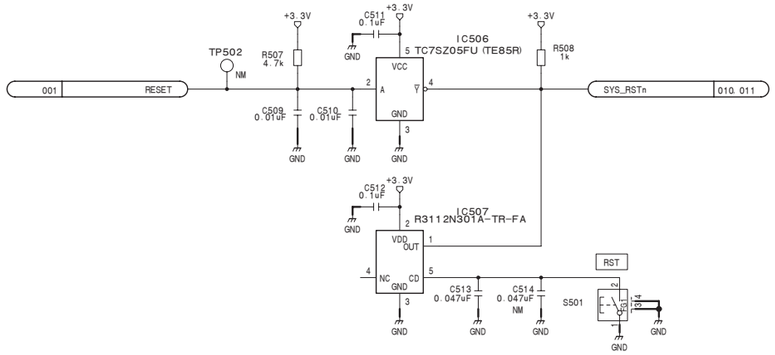

XPT-31/31A (5/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_5

XPT-31/31A (6/17)
SUFFIX: -14

CPU I/F

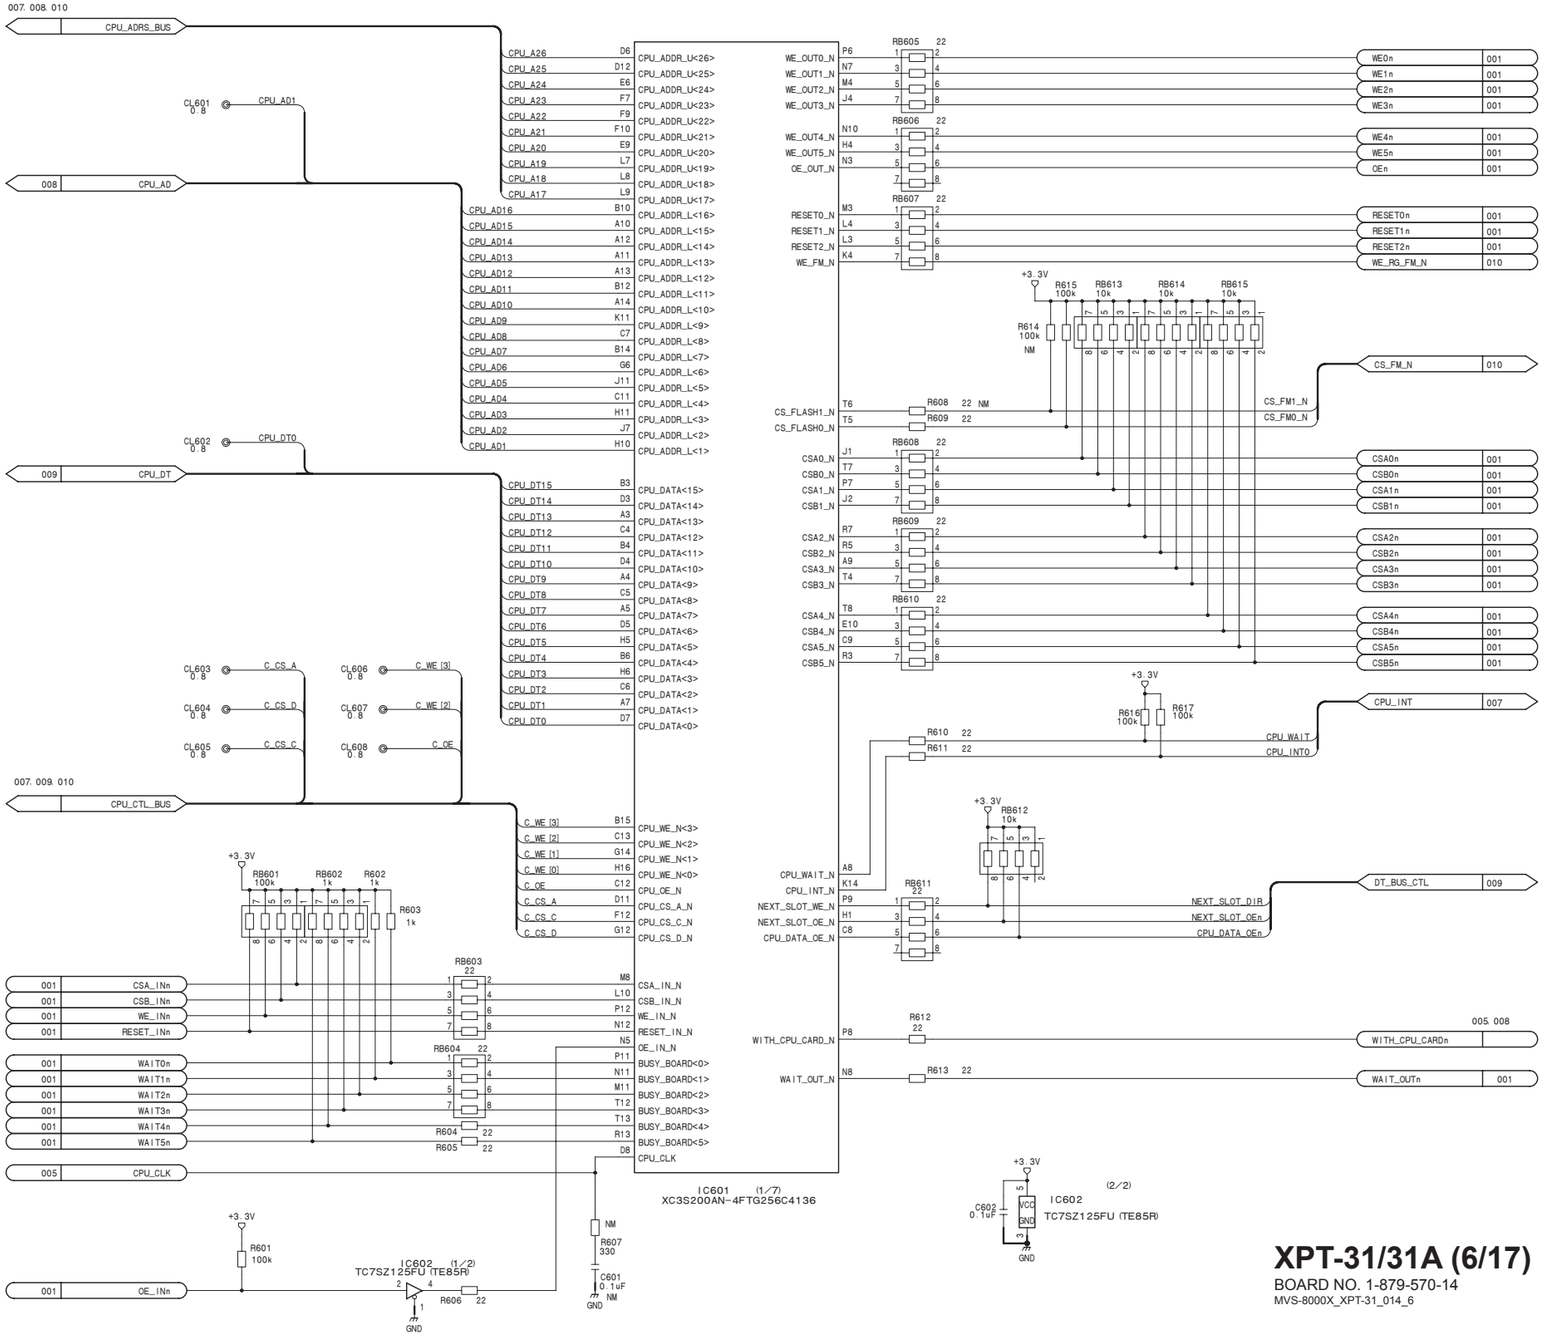

XPT-31/31A (6/17)

BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_6

4-338 (a)

A B C D E F G H

XPT-31/31A (7/17)
SUFFIX: -14

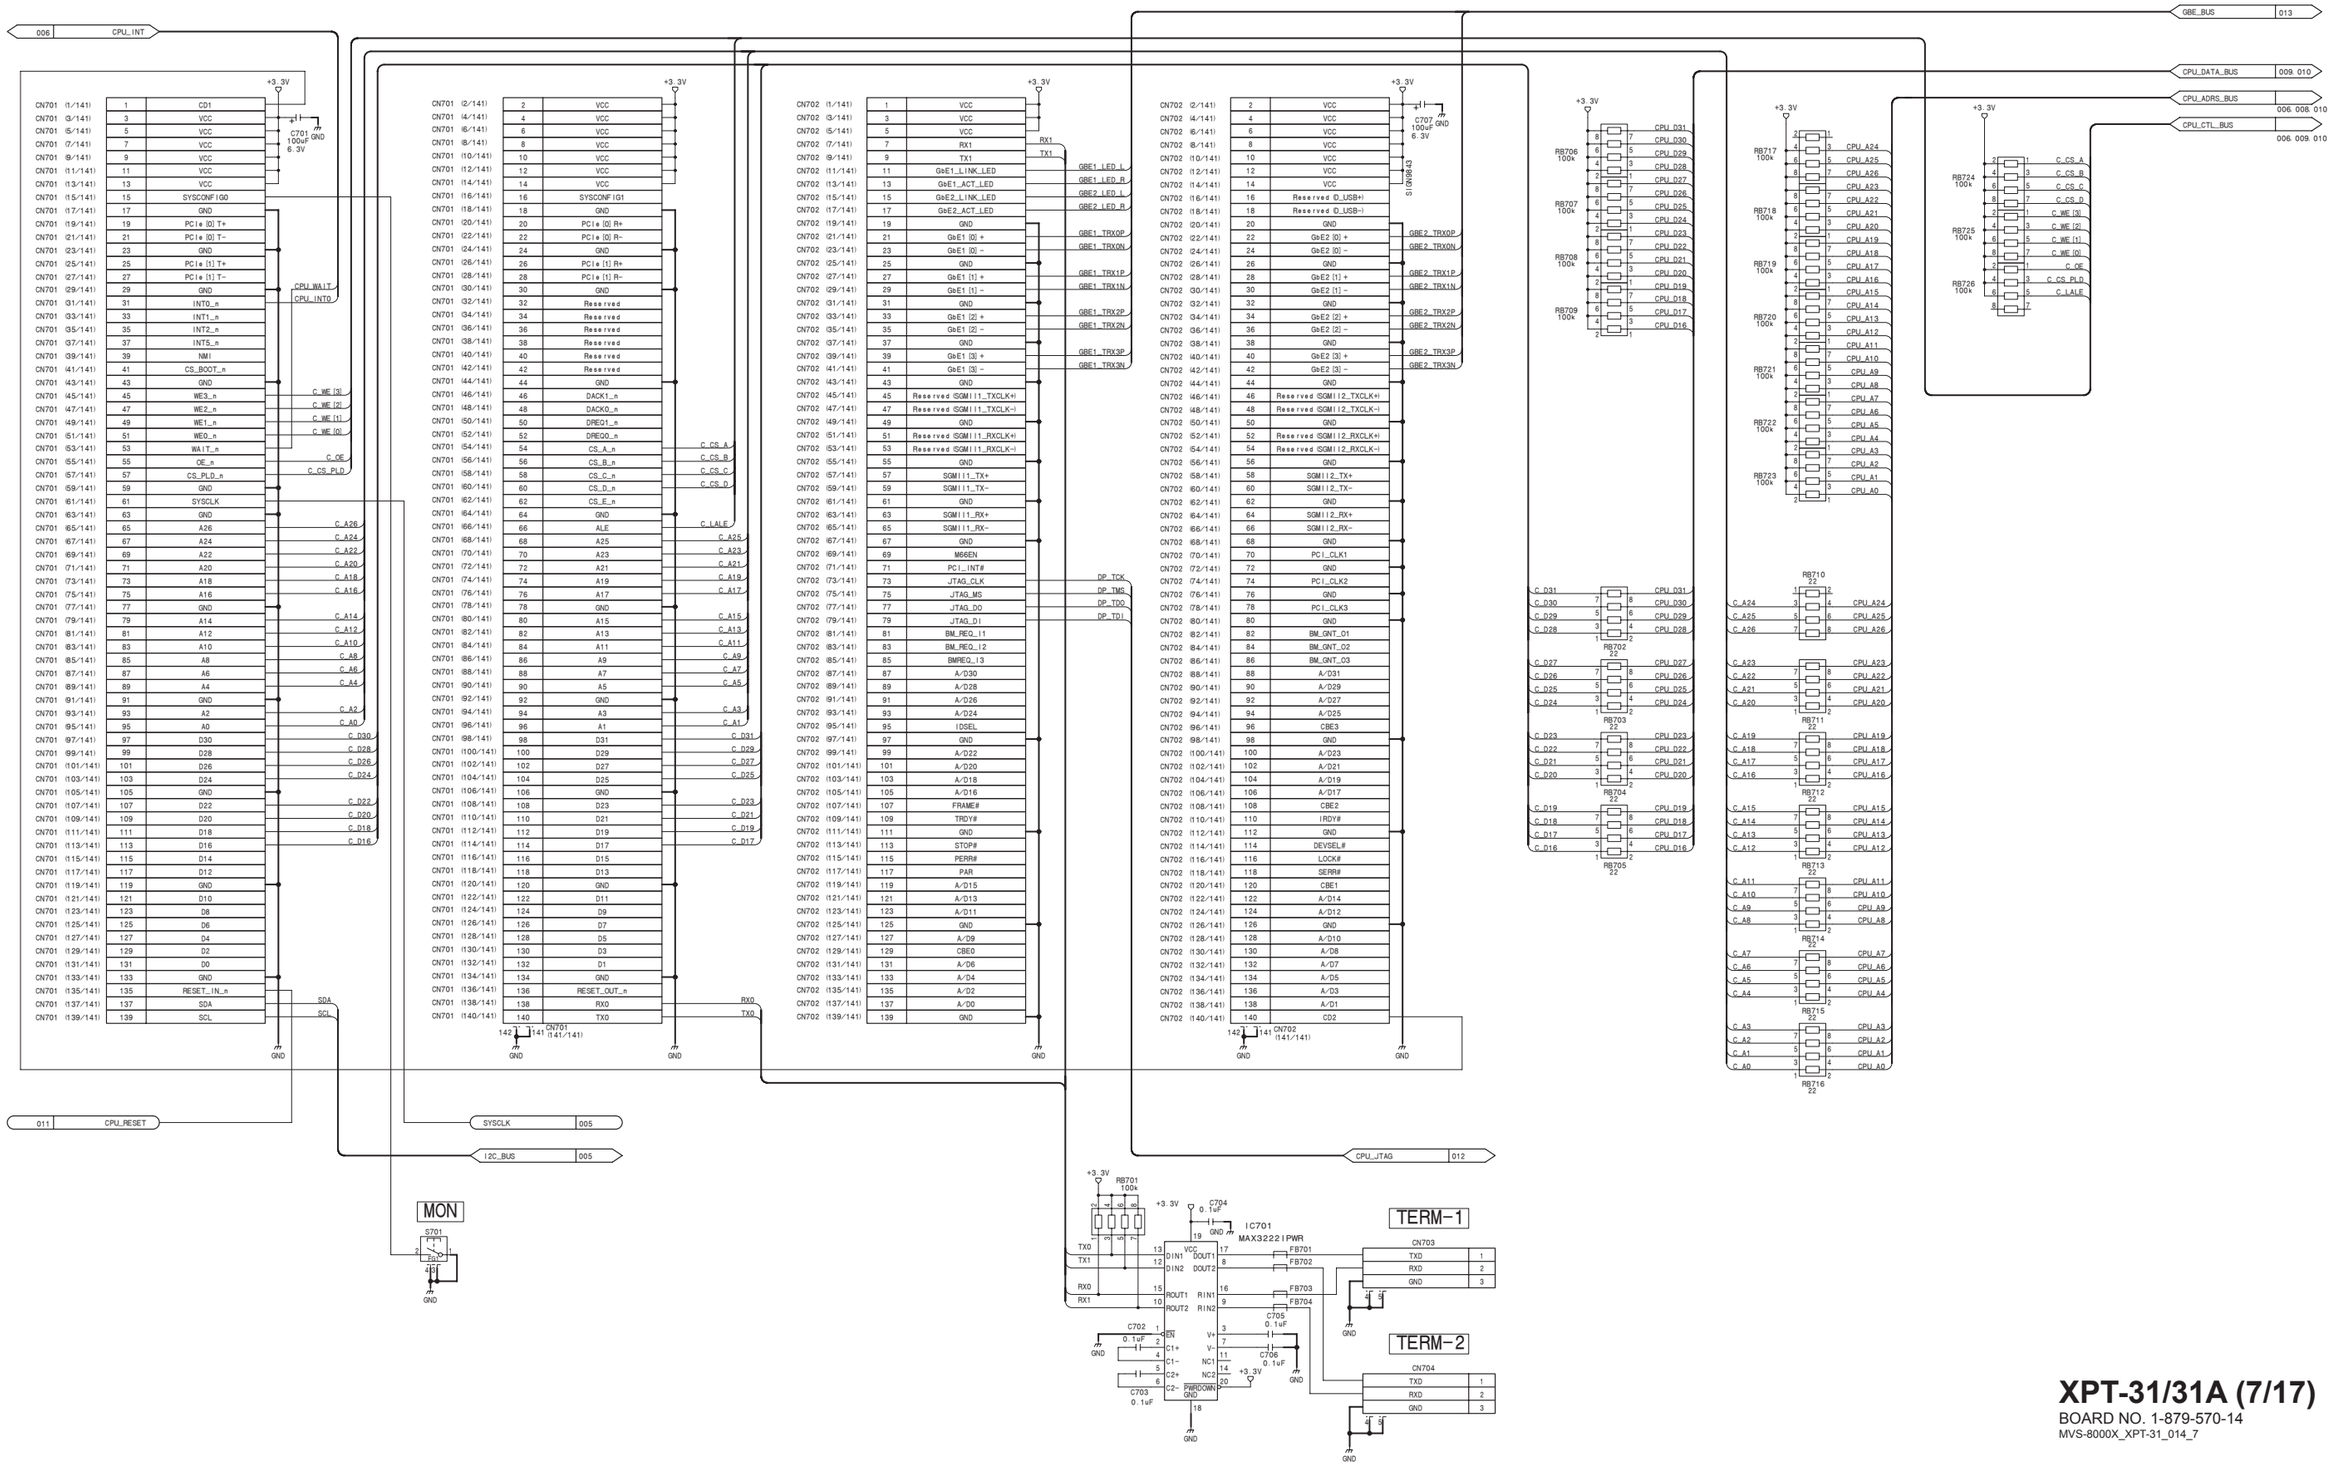

XPT-31/31A (7/17)
BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_7

XPT-31/31A (8/17)
SUFFIX: -14

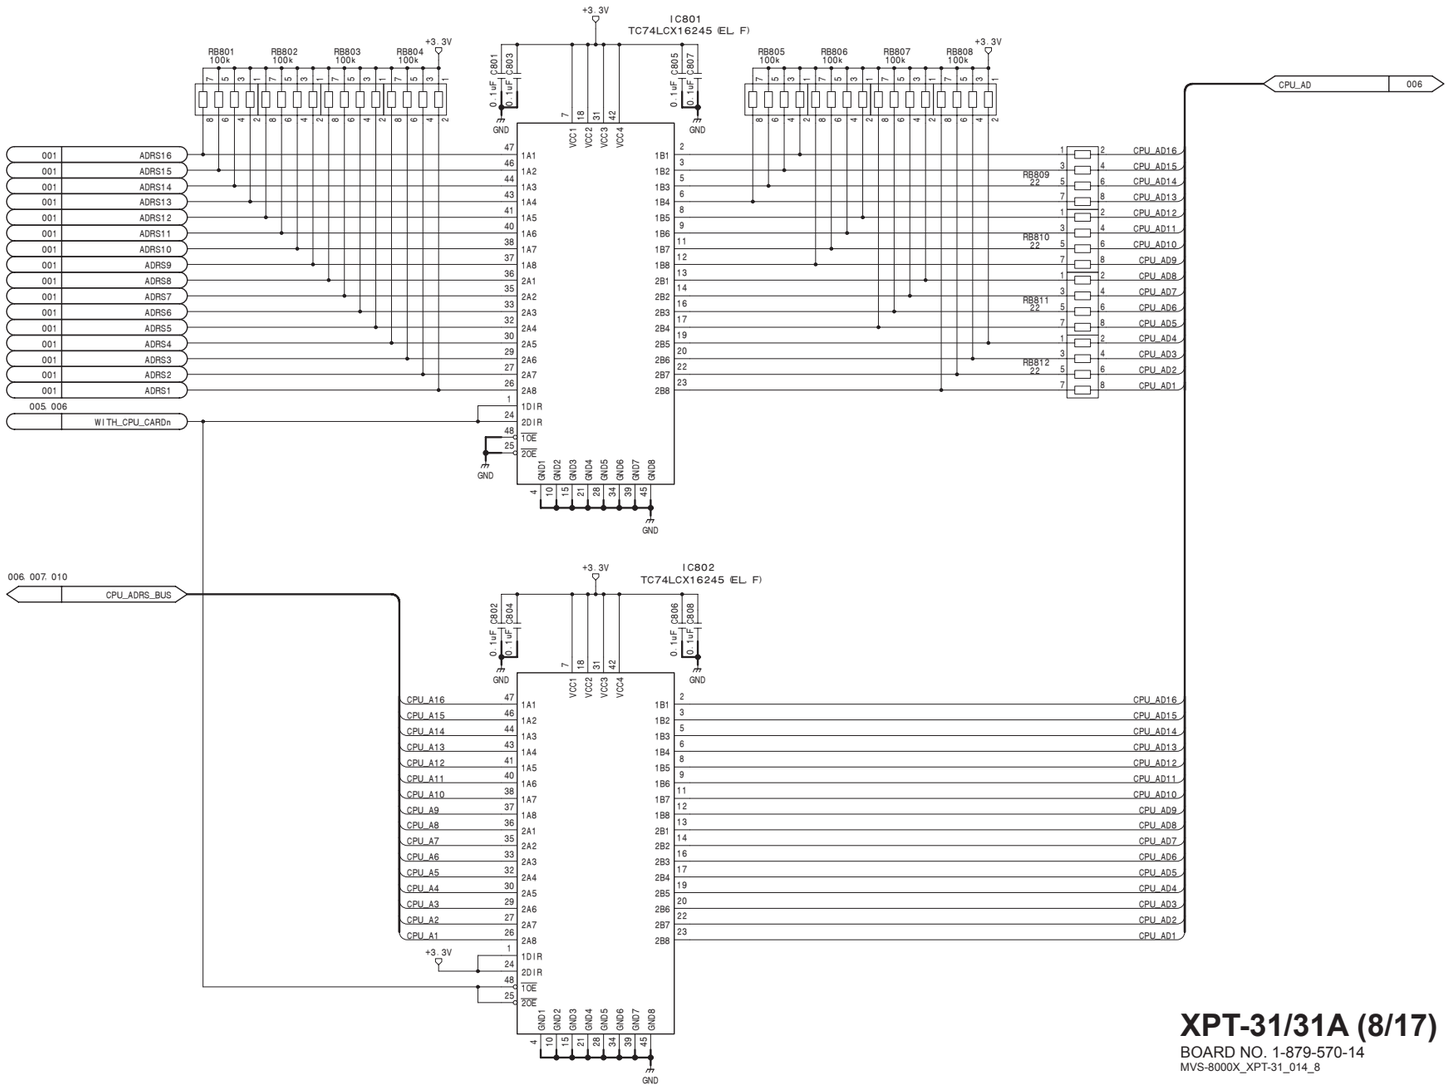

XPT-31/31A (8/17)

BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_8

XPT-31/31A (9/17)
SUFFIX: -14

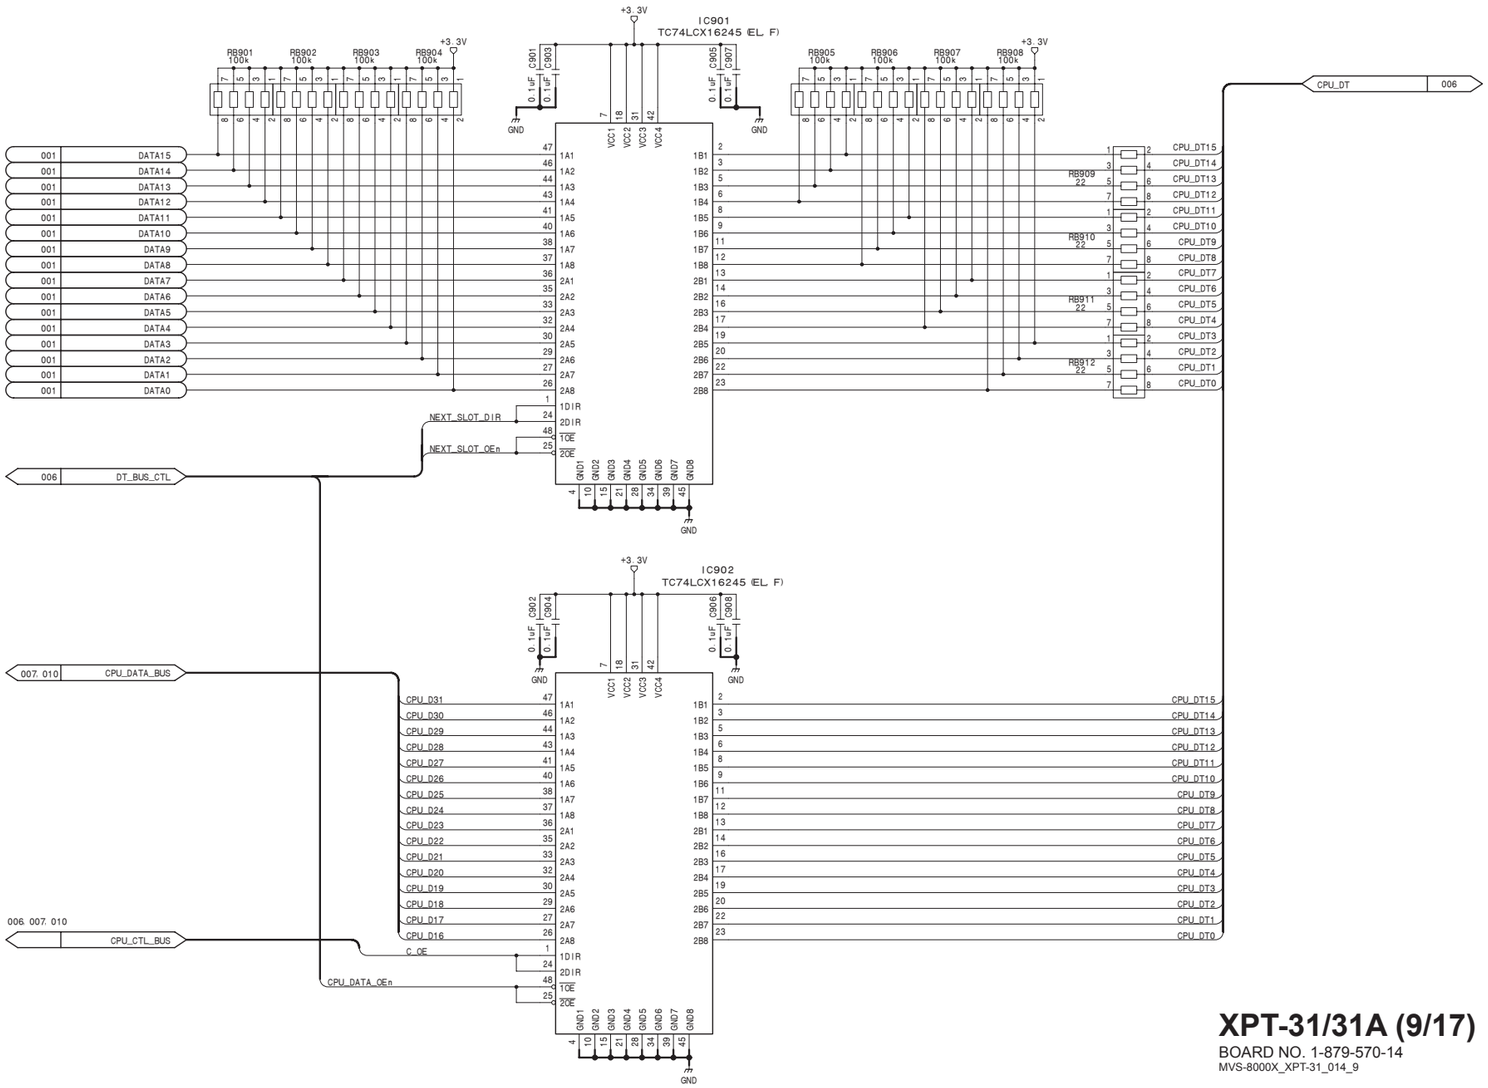

XPT-31/31A (9/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_9

4-341 (a)

XPT-31/31A (10/17)
SUFFIX: -14

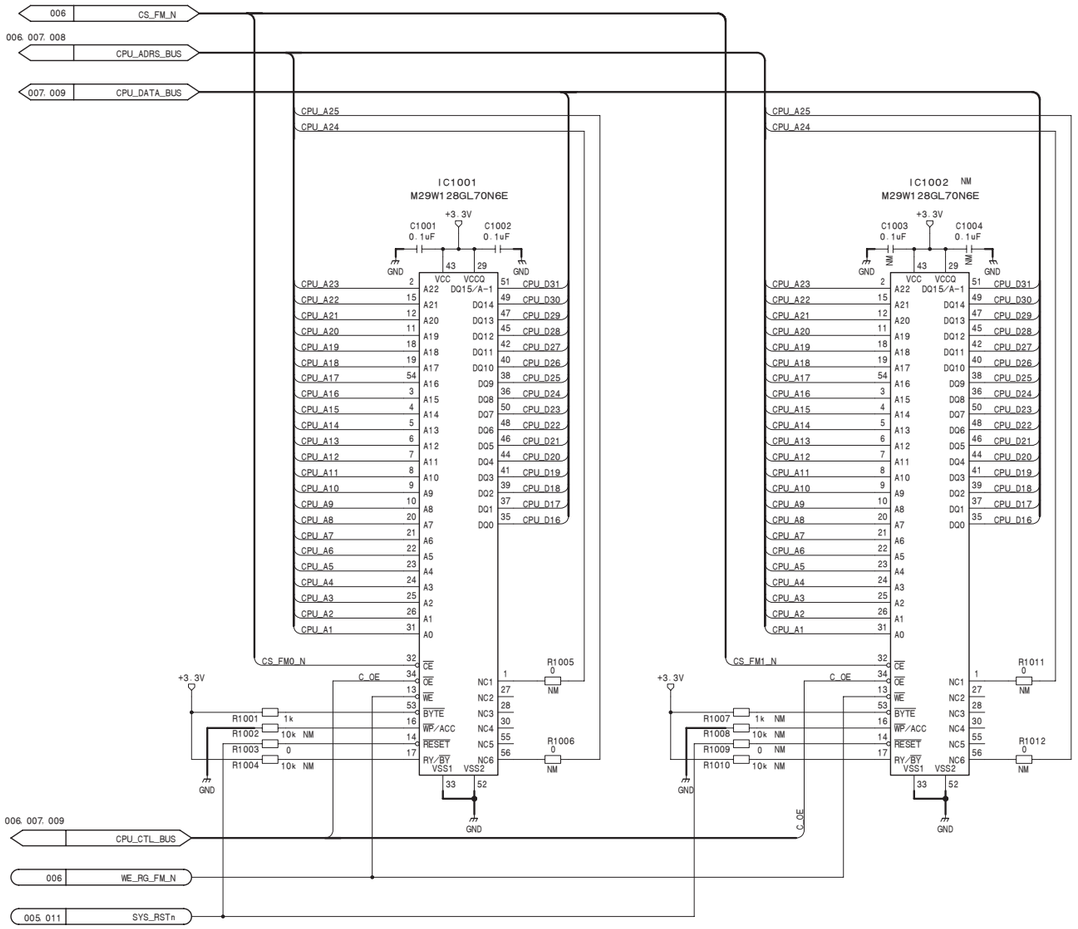

XPT-31/31A (10/17)

BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_10

4-342 (a)

XPT-31/31A (11/17)
SUFFIX: -14

DEV CTL

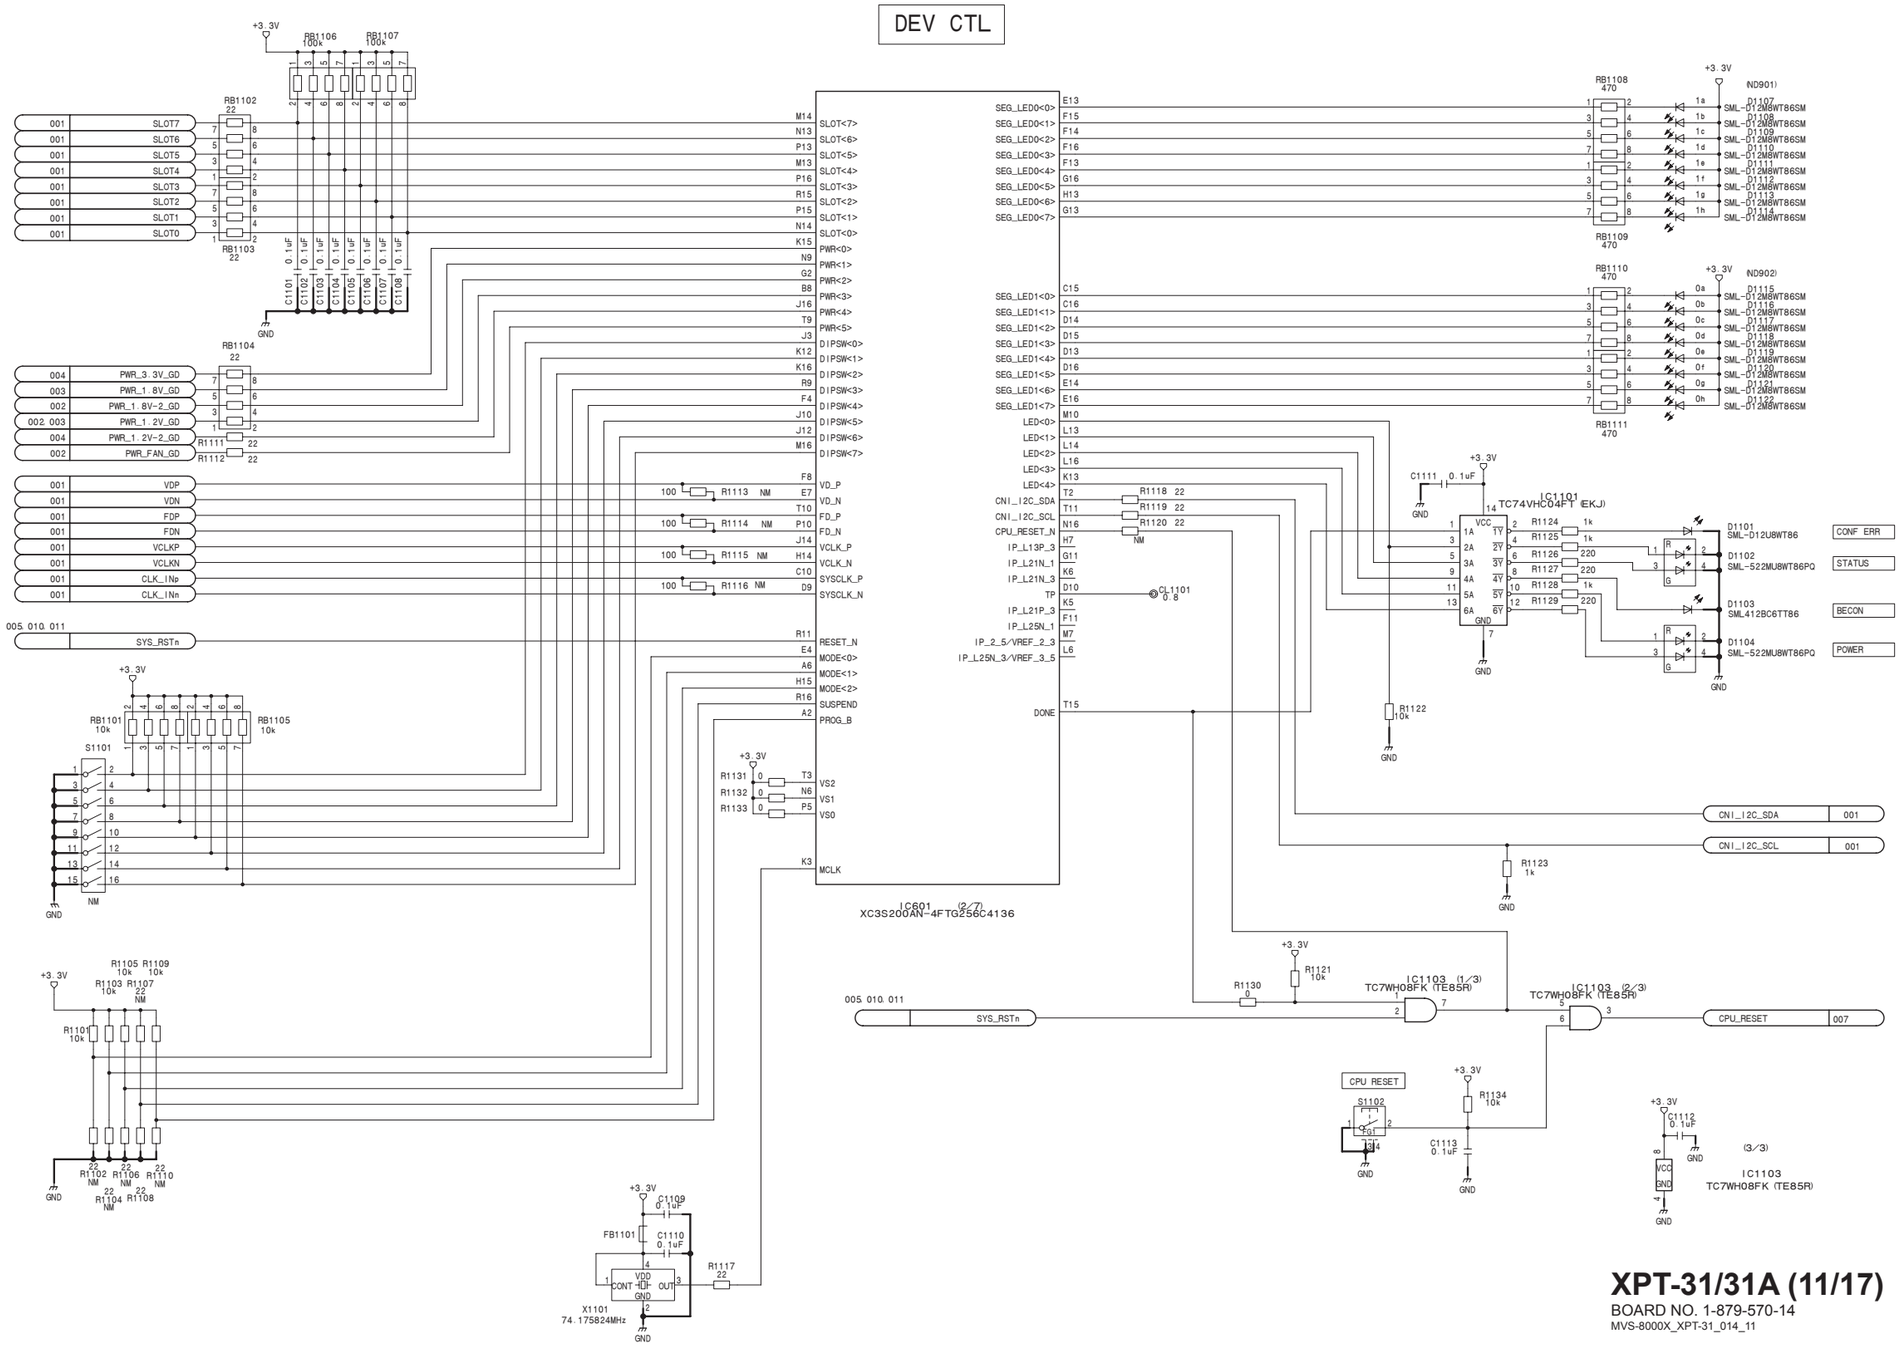

XPT-31/31A (11/17)
BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_11

XPT-31/31A (12/17)
SUFFIX: -14

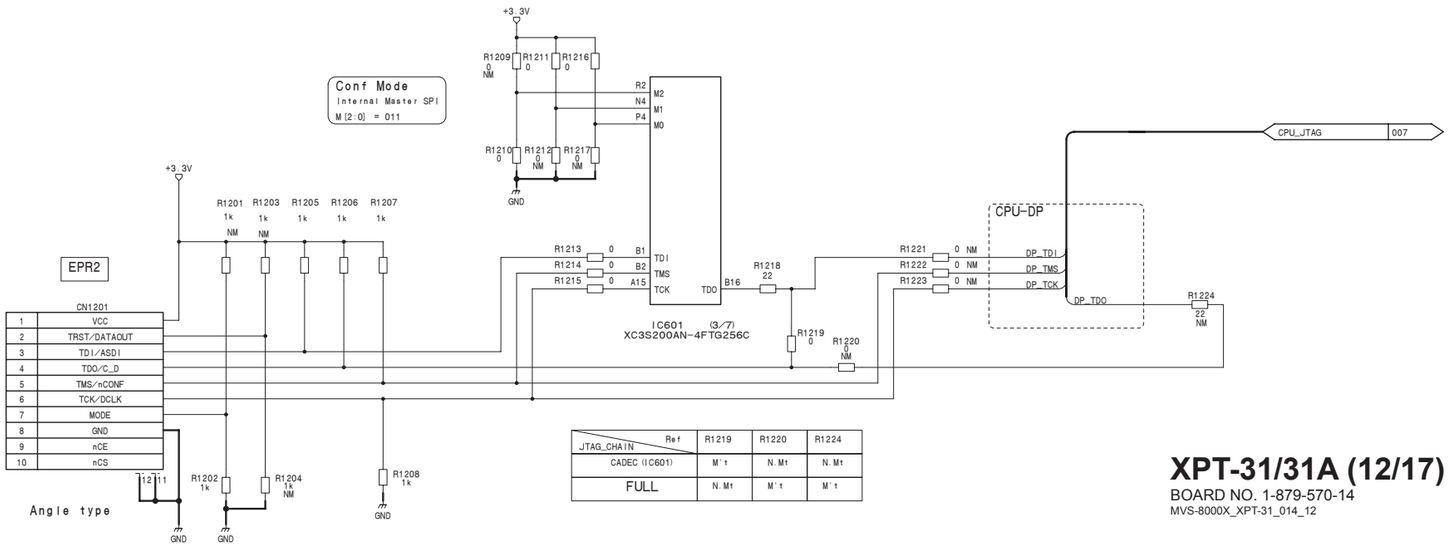

JTAG_CHAIN \ Ref	R1219	R1220	R1224
CADEC (IC601)	M't	N.Mt	N.Mt
FULL	N.Mt	M't	M't

XPT-31/31A (12/17)
BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_12

XPT-31/31A (13/17)

SUFFIX: -14

XPT-31/31A (13/17)

SUFFIX: -14

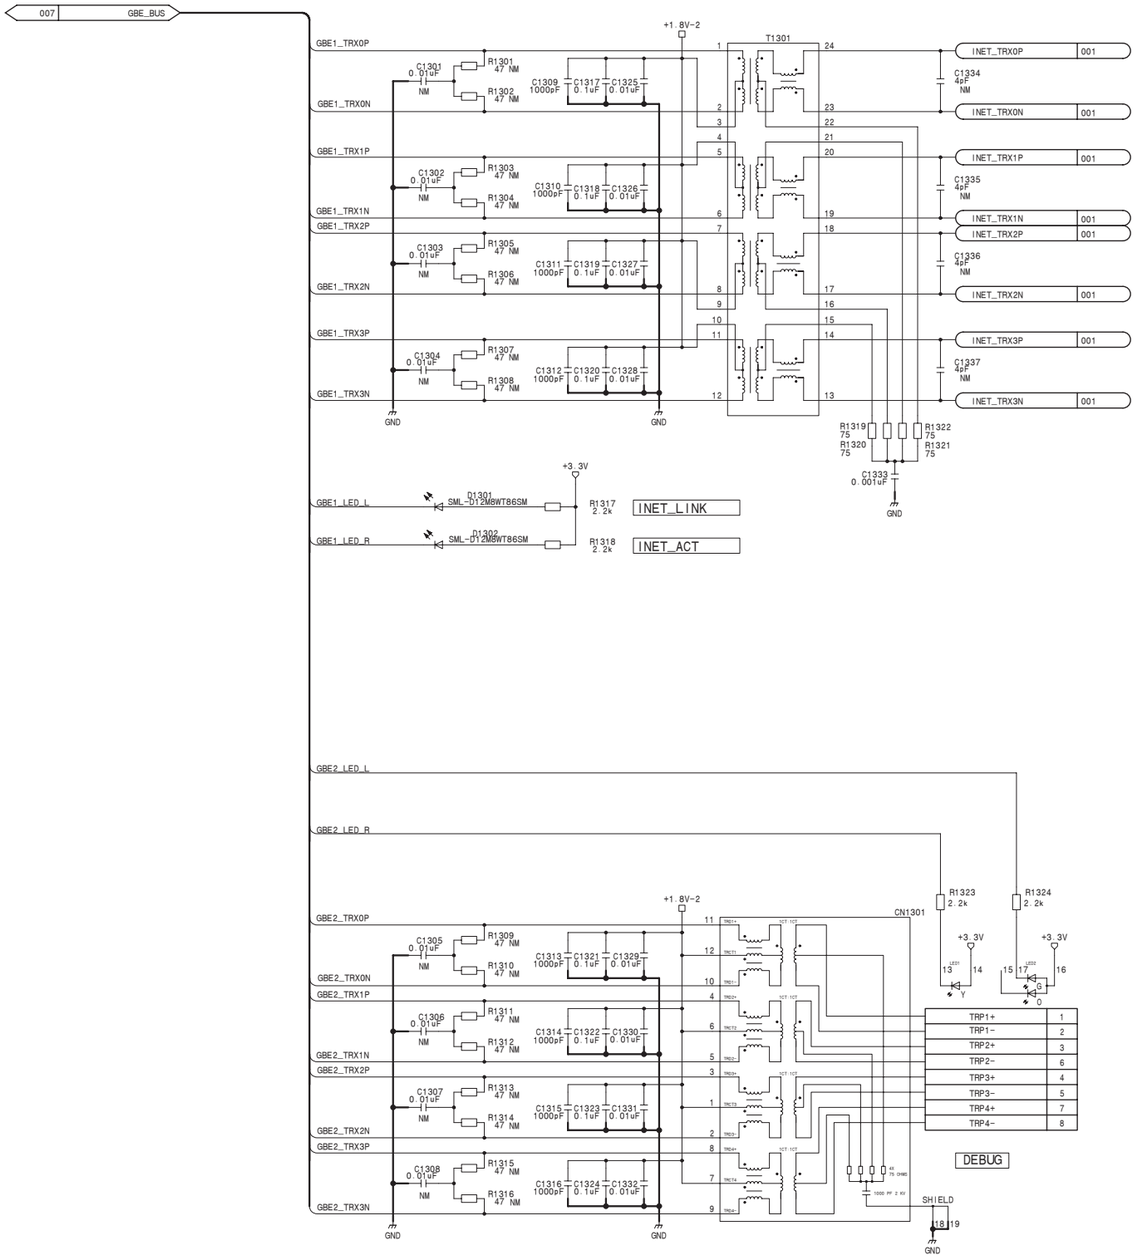

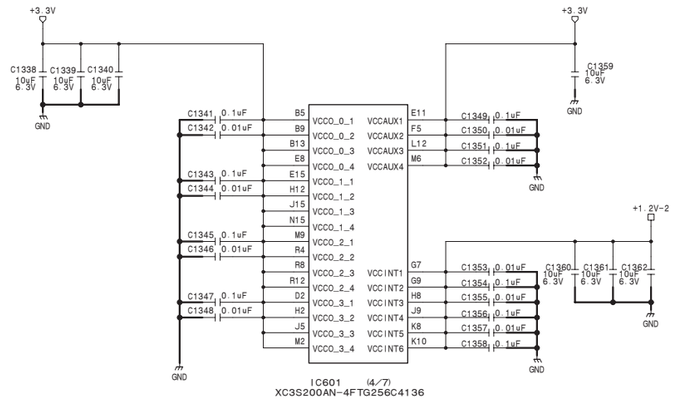





XPT-31/31A (13/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_13

4-345 (a)

XPT-31/31A (14/17)
SUFFIX: -14

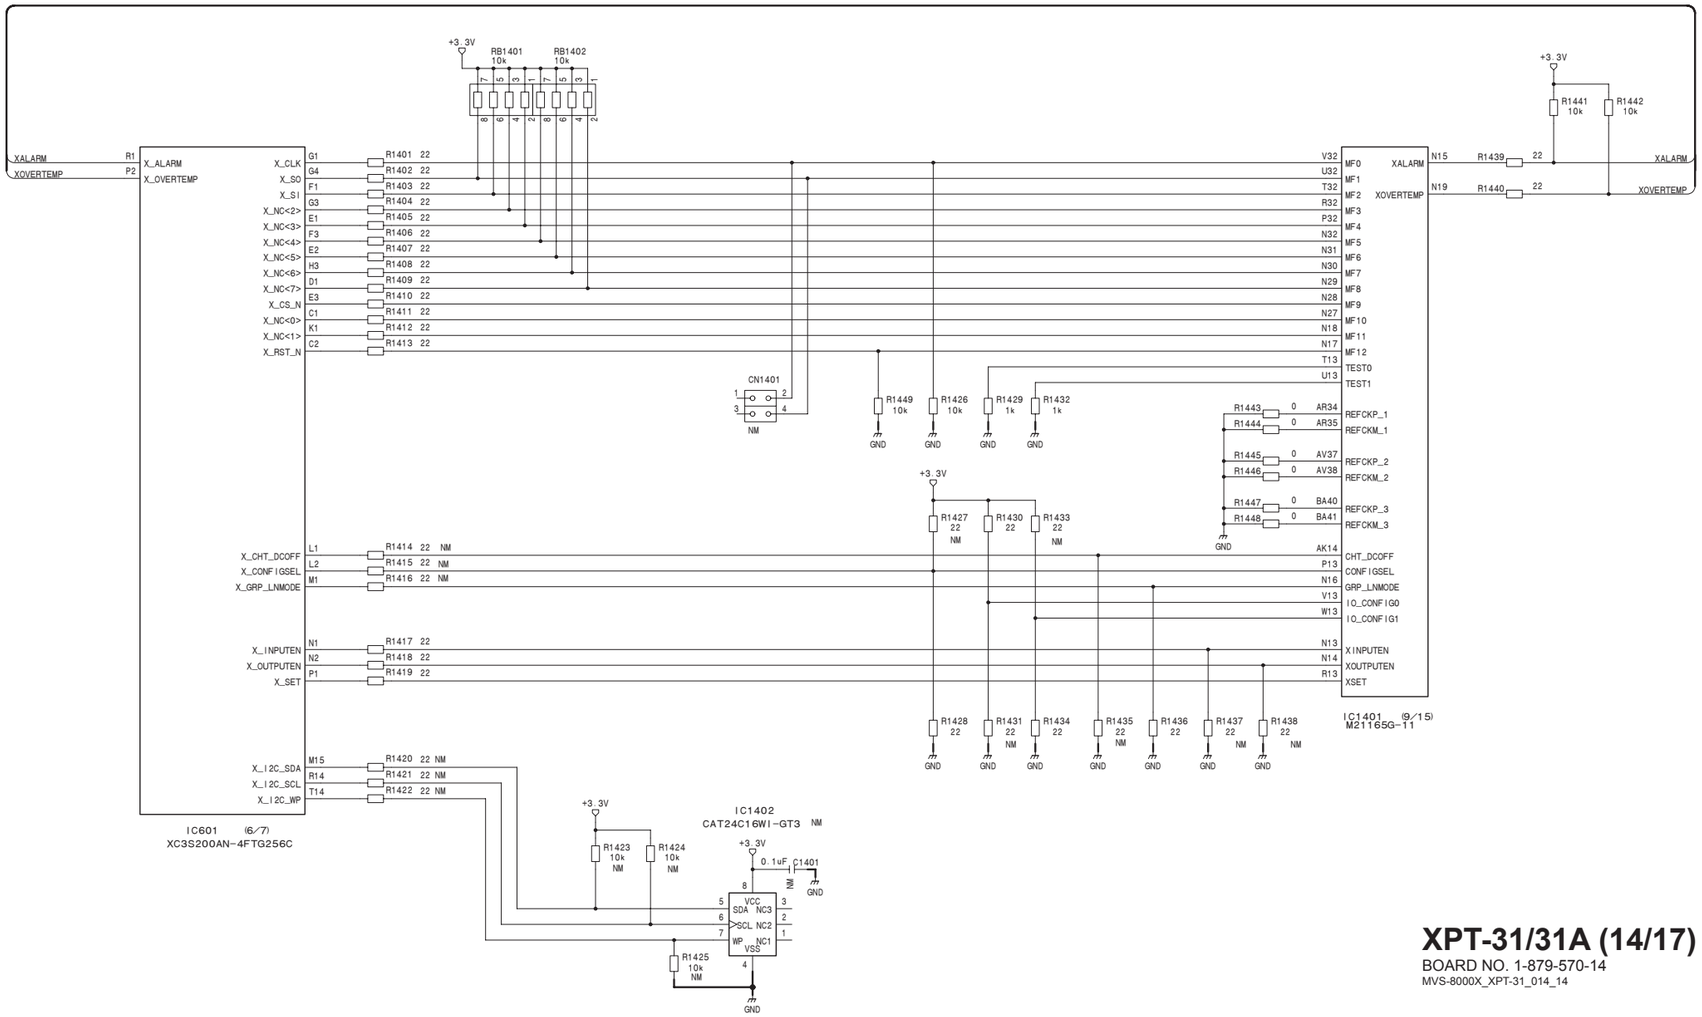

XPT-31/31A (14/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_14

4-346 (a)

XPT-31/31A (15/17)
SUFFIX: -14

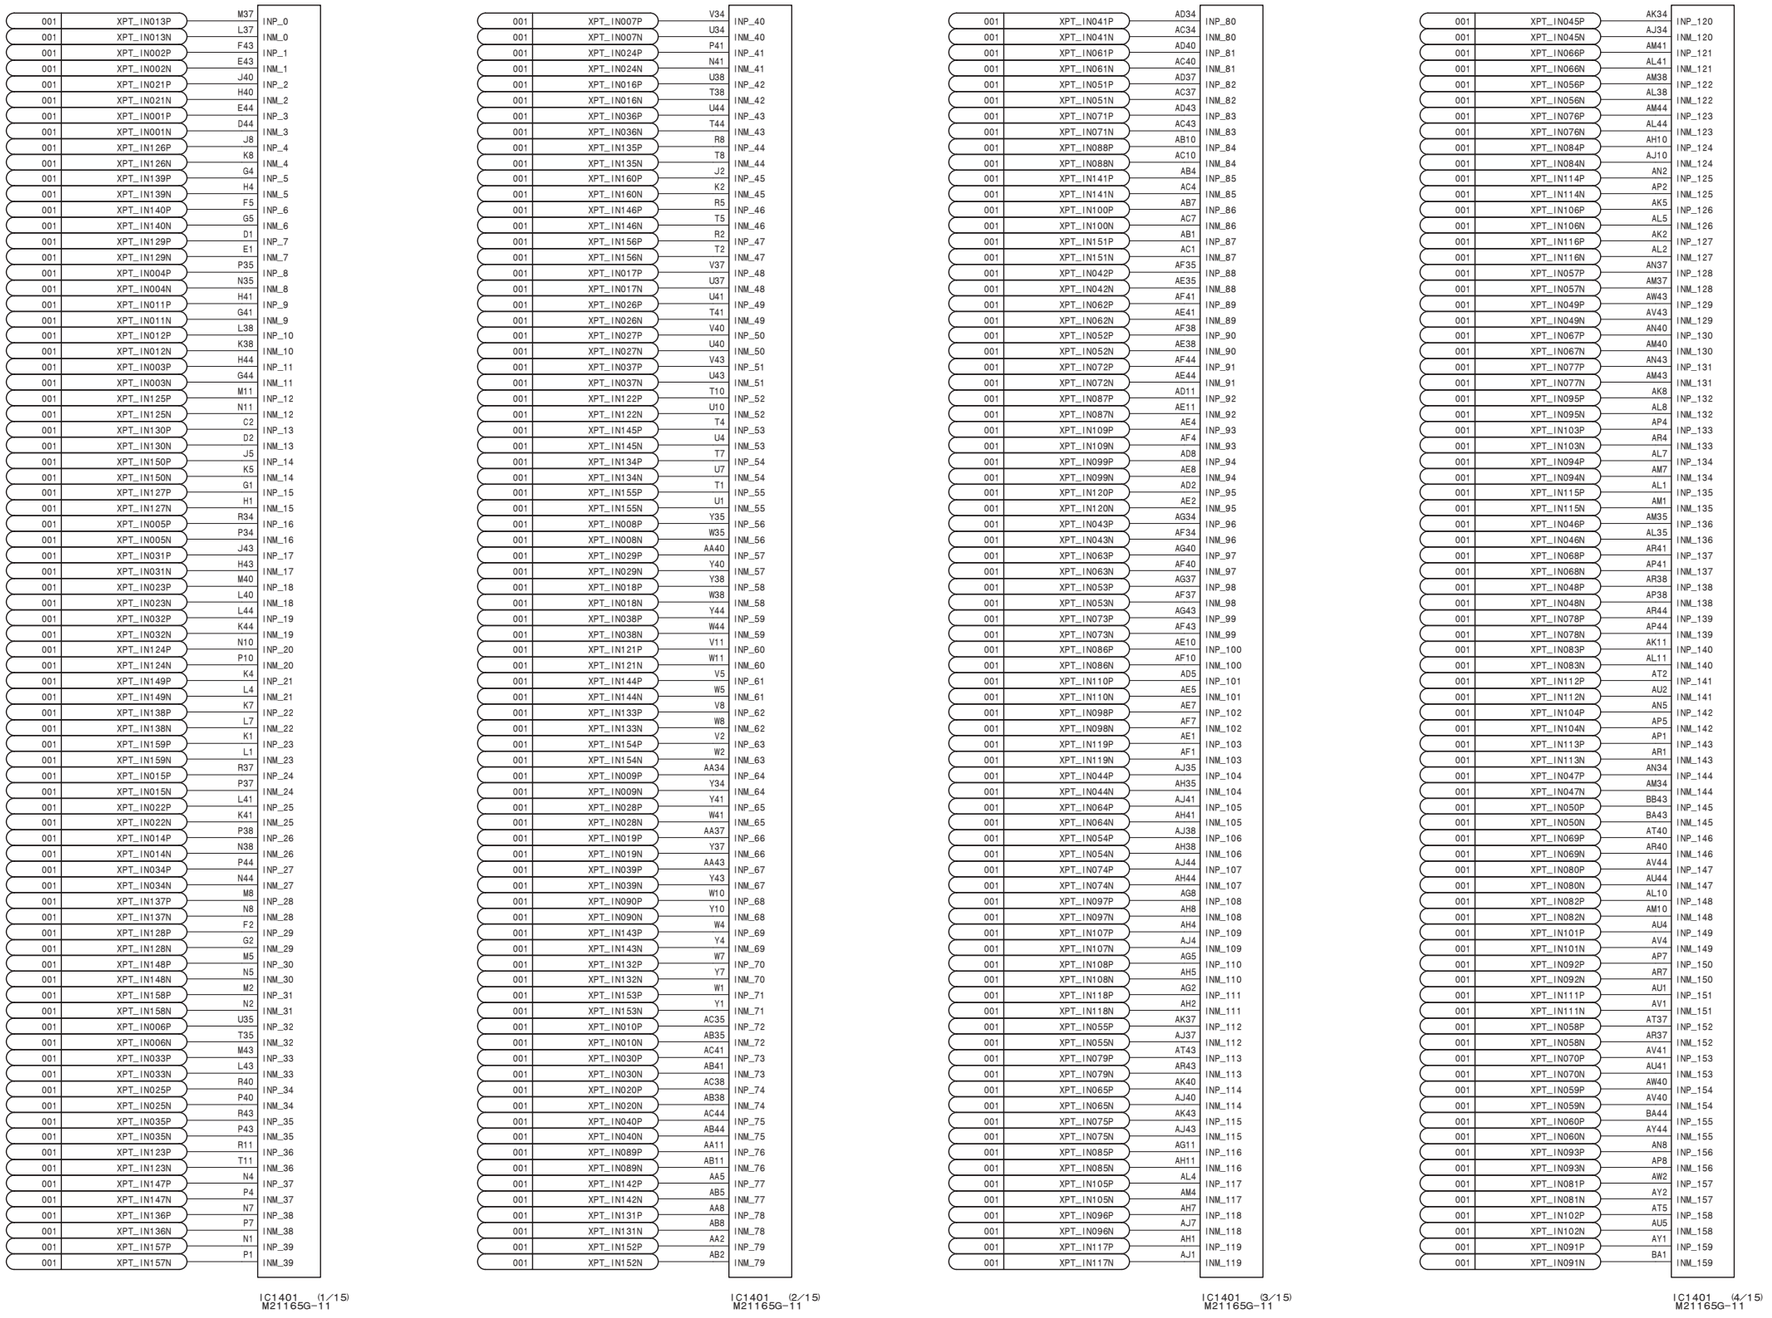

XPT-31/31A (15/17)
BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_15

XPT-31/31A (16/17)
SUFFIX: -14

OUTP_0	D38	XPT_OUT139P	001
OUTM_0	D37	XPT_OUT139N	001
OUTP_1	A41	XPT_OUT129P	001
OUTM_1	A40	XPT_OUT129N	001
OUTP_2	B42	XPT_OUT130P	001
OUTM_2	B41	XPT_OUT130N	001
OUTP_3	A38	XPT_OUT127P	001
OUTM_3	A37	XPT_OUT127N	001
OUTP_4	BC39	XPT_OUT002P	001
OUTM_4	BC40	XPT_OUT002N	001
OUTP_5	BD40	XPT_OUT001P	001
OUTM_5	BD41	XPT_OUT001N	001
OUTP_6	BA37	XPT_OUT011P	001
OUTM_6	BA38	XPT_OUT011N	001
OUTP_7	BD37	XPT_OUT003P	001
OUTM_7	BD38	XPT_OUT003N	001
OUTP_8	H36	XPT_OUT126P	001
OUTM_8	H35	XPT_OUT126N	001
OUTP_9	E39	XPT_OUT140P	001
OUTM_9	E38	XPT_OUT140N	001
OUTP_10	L33	XPT_OUT125P	001
OUTM_10	L32	XPT_OUT125N	001
OUTP_11	E36	XPT_OUT150P	001
OUTM_11	E35	XPT_OUT150N	001
OUTP_12	AU33	XPT_OUT013P	001
OUTM_12	AU34	XPT_OUT013N	001
OUTP_13	AY36	XPT_OUT021P	001
OUTM_13	AY37	XPT_OUT021N	001
OUTP_14	AR31	XPT_OUT004P	001
OUTM_14	AR32	XPT_OUT004N	001
OUTP_15	AV34	XPT_OUT012P	001
OUTM_15	AV35	XPT_OUT012N	001
OUTP_16	D35	XPT_OUT149P	001
OUTM_16	D34	XPT_OUT149N	001
OUTP_17	A35	XPT_OUT159P	001
OUTM_17	A34	XPT_OUT159N	001
OUTP_18	B39	XPT_OUT128P	001
OUTM_18	B38	XPT_OUT128N	001
OUTP_19	B33	XPT_OUT158P	001
OUTM_19	B32	XPT_OUT158N	001
OUTP_20	BC36	XPT_OUT031P	001
OUTM_20	BC37	XPT_OUT031N	001
OUTP_21	BD34	XPT_OUT032P	001
OUTM_21	BD35	XPT_OUT032N	001
OUTP_22	BA34	XPT_OUT022P	001
OUTM_22	BA35	XPT_OUT022N	001
OUTP_23	BD31	XPT_OUT034P	001
OUTM_23	BD32	XPT_OUT034N	001
OUTP_24	K32	XPT_OUT124P	001
OUTM_24	K31	XPT_OUT124N	001
OUTP_25	G35	XPT_OUT138P	001
OUTM_25	G34	XPT_OUT138N	001
OUTP_26	H33	XPT_OUT137P	001
OUTM_26	H32	XPT_OUT137N	001
OUTP_27	E33	XPT_OUT148P	001
OUTM_27	E32	XPT_OUT148N	001
OUTP_28	AP30	XPT_OUT005P	001
OUTM_28	AP31	XPT_OUT005N	001
OUTP_29	AY33	XPT_OUT023P	001
OUTM_29	AY34	XPT_OUT023N	001
OUTP_30	AU30	XPT_OUT015P	001
OUTM_30	AU31	XPT_OUT015N	001
OUTP_31	AV31	XPT_OUT014P	001
OUTM_31	AV32	XPT_OUT014N	001
OUTP_32	D32	XPT_OUT147P	001
OUTM_32	D31	XPT_OUT147N	001
OUTP_33	A32	XPT_OUT157P	001
OUTM_33	A31	XPT_OUT157N	001
OUTP_34	B36	XPT_OUT160P	001
OUTM_34	B35	XPT_OUT160N	001
OUTP_35	B30	XPT_OUT156P	001
OUTM_35	B29	XPT_OUT156N	001
OUTP_36	BC33	XPT_OUT033P	001
OUTM_36	BC34	XPT_OUT033N	001
OUTP_37	BC30	XPT_OUT035P	001
OUTM_37	BC31	XPT_OUT035N	001
OUTP_38	BA31	XPT_OUT024P	001
OUTM_38	BA32	XPT_OUT024N	001
OUTP_39	BD28	XPT_OUT036P	001
OUTM_39	BD29	XPT_OUT036N	001

IC1401 (5/15)
M21165G-11

OUTP_40	L30	XPT_OUT123P	001
OUTM_40	L29	XPT_OUT123N	001
OUTP_41	G32	XPT_OUT136P	001
OUTM_41	G31	XPT_OUT136N	001
OUTP_42	H30	XPT_OUT135P	001
OUTM_42	H29	XPT_OUT135N	001
OUTP_43	E30	XPT_OUT146P	001
OUTM_43	E29	XPT_OUT146N	001
OUTP_44	AR28	XPT_OUT006P	001
OUTM_44	AR29	XPT_OUT006N	001
OUTP_45	AY30	XPT_OUT025P	001
OUTM_45	AY31	XPT_OUT025N	001
OUTP_46	AP27	XPT_OUT007P	001
OUTM_46	AP28	XPT_OUT007N	001
OUTP_47	AV28	XPT_OUT016P	001
OUTM_47	AV29	XPT_OUT016N	001
OUTP_48	D29	XPT_OUT145P	001
OUTM_48	D28	XPT_OUT145N	001
OUTP_49	A29	XPT_OUT155P	001
OUTM_49	A28	XPT_OUT155N	001
OUTP_50	E27	XPT_OUT144P	001
OUTM_50	E26	XPT_OUT144N	001
OUTP_51	B27	XPT_OUT154P	001
OUTM_51	B26	XPT_OUT154N	001
OUTP_52	BA28	XPT_OUT026P	001
OUTM_52	BA29	XPT_OUT026N	001
OUTP_53	BC27	XPT_OUT037P	001
OUTM_53	BC28	XPT_OUT037N	001
OUTP_54	AY24	XPT_OUT029P	001
OUTM_54	AY25	XPT_OUT029N	001
OUTP_55	BD25	XPT_OUT038P	001
OUTM_55	BD26	XPT_OUT038N	001
OUTP_56	K29	XPT_OUT122P	001
OUTM_56	K28	XPT_OUT122N	001
OUTP_57	G29	XPT_OUT134P	001
OUTM_57	G28	XPT_OUT134N	001
OUTP_58	L27	XPT_OUT121P	001
OUTM_58	L26	XPT_OUT121N	001
OUTP_59	H27	XPT_OUT133P	001
OUTM_59	H26	XPT_OUT133N	001
OUTP_60	AU27	XPT_OUT017P	001
OUTM_60	AU28	XPT_OUT017N	001
OUTP_61	AY27	XPT_OUT027P	001
OUTM_61	AY28	XPT_OUT027N	001
OUTP_62	AR25	XPT_OUT008P	001
OUTM_62	AR26	XPT_OUT008N	001
OUTP_63	AV25	XPT_OUT018P	001
OUTM_63	AV26	XPT_OUT018N	001
OUTP_64	D26	XPT_OUT143P	001
OUTM_64	D25	XPT_OUT143N	001
OUTP_65	A26	XPT_OUT153P	001
OUTM_65	A25	XPT_OUT153N	001
OUTP_66	E24	XPT_OUT142P	001
OUTM_66	E23	XPT_OUT142N	001
OUTP_67	B24	XPT_OUT152P	001
OUTM_67	B23	XPT_OUT152N	001
OUTP_68	BA25	XPT_OUT028P	001
OUTM_68	BA26	XPT_OUT028N	001
OUTP_69	BC24	XPT_OUT039P	001
OUTM_69	BC25	XPT_OUT039N	001
OUTP_70	BA22	XPT_OUT030P	001
OUTM_70	BA23	XPT_OUT030N	001
OUTP_71	BD22	XPT_OUT040P	001
OUTM_71	BD23	XPT_OUT040N	001
OUTP_72	K26	XPT_OUT090P	001
OUTM_72	K25	XPT_OUT090N	001
OUTP_73	G26	XPT_OUT132P	001
OUTM_73	G25	XPT_OUT132N	001
OUTP_74	L24	XPT_OUT089P	001
OUTM_74	L23	XPT_OUT089N	001
OUTP_75	H24	XPT_OUT131P	001
OUTM_75	H23	XPT_OUT131N	001
OUTP_76	AP24	XPT_OUT009P	001
OUTM_76	AP25	XPT_OUT009N	001
OUTP_77	AU24	XPT_OUT019P	001
OUTM_77	AU25	XPT_OUT019N	001
OUTP_78	AR22	XPT_OUT010P	001
OUTM_78	AR23	XPT_OUT010N	001
OUTP_79	AV22	XPT_OUT020P	001
OUTM_79	AV23	XPT_OUT020N	001

IC1401 (6/15)
M21165G-11

OUTP_80	D23	XPT_OUT141P	001
OUTM_80	D22	XPT_OUT141N	001
OUTP_81	A23	XPT_OUT151P	001
OUTM_81	A22	XPT_OUT151N	001
OUTP_82	D20	XPT_OUT109P	001
OUTM_82	D19	XPT_OUT109N	001
OUTP_83	B21	XPT_OUT120P	001
OUTM_83	B20	XPT_OUT120N	001
OUTP_84	AY21	XPT_OUT061P	001
OUTM_84	AY22	XPT_OUT061N	001
OUTP_85	BC21	XPT_OUT071P	001
OUTM_85	BC22	XPT_OUT071N	001
OUTP_86	BA19	XPT_OUT062P	001
OUTM_86	BA20	XPT_OUT062N	001
OUTP_87	BD19	XPT_OUT072P	001
OUTM_87	BD20	XPT_OUT072N	001
OUTP_88	K23	XPT_OUT088P	001
OUTM_88	K22	XPT_OUT088N	001
OUTP_89	G23	XPT_OUT100P	001
OUTM_89	G22	XPT_OUT100N	001
OUTP_90	L21	XPT_OUT087P	001
OUTM_90	L20	XPT_OUT087N	001
OUTP_91	H21	XPT_OUT099P	001
OUTM_91	H20	XPT_OUT099N	001
OUTP_92	AP21	XPT_OUT041P	001
OUTM_92	AP22	XPT_OUT041N	001
OUTP_93	AU21	XPT_OUT051P	001
OUTM_93	AU22	XPT_OUT051N	001
OUTP_94	AR19	XPT_OUT042P	001
OUTM_94	AR20	XPT_OUT042N	001
OUTP_95	AV19	XPT_OUT052P	001
OUTM_95	AV20	XPT_OUT052N	001
OUTP_96	E21	XPT_OUT110P	001
OUTM_96	E20	XPT_OUT110N	001
OUTP_97	A20	XPT_OUT119P	001
OUTM_97	A19	XPT_OUT119N	001
OUTP_98	D17	XPT_OUT107P	001
OUTM_98	D16	XPT_OUT107N	001
OUTP_99	B18	XPT_OUT118P	001
OUTM_99	B17	XPT_OUT118N	001
OUTP_100	AY18	XPT_OUT063P	001
OUTM_100	AY19	XPT_OUT063N	001
OUTP_101	BC18	XPT_OUT073P	001
OUTM_101	BC19	XPT_OUT073N	001
OUTP_102	BA16	XPT_OUT064P	001
OUTM_102	BA17	XPT_OUT064N	001
OUTP_103	BD16	XPT_OUT074P	001
OUTM_103	BD17	XPT_OUT074N	001
OUTP_104	K20	XPT_OUT086P	001
OUTM_104	K19	XPT_OUT086N	001
OUTP_105	G20	XPT_OUT098P	001
OUTM_105	G19	XPT_OUT098N	001
OUTP_106	H18	XPT_OUT097P	001
OUTM_106	H17	XPT_OUT097N	001
OUTP_107	E18	XPT_OUT108P	001
OUTM_107	E17	XPT_OUT108N	001
OUTP_108	AP18	XPT_OUT043P	001
OUTM_108	AP19	XPT_OUT043N	001
OUTP_109	AU18	XPT_OUT053P	001
OUTM_109	AU19	XPT_OUT053N	001
OUTP_110	AR16	XPT_OUT044P	001
OUTM_110	AR17	XPT_OUT044N	001
OUTP_111	AV16	XPT_OUT054P	001
OUTM_111	AV17	XPT_OUT054N	001
OUTP_112	D14	XPT_OUT105P	001
OUTM_112	D13	XPT_OUT105N	001
OUTP_113	A17	XPT_OUT117P	001
OUTM_113	A16	XPT_OUT117N	001
OUTP_114	B12	XPT_OUT114P	001
OUTM_114	B11	XPT_OUT114N	001
OUTP_115	B15	XPT_OUT116P	001
OUTM_115	B14	XPT_OUT116N	001
OUTP_116	BC9	XPT_OUT079P	001
OUTM_116	BC10	XPT_OUT079N	001
OUTP_117	BC15	XPT_OUT075P	001
OUTM_117	BC16	XPT_OUT075N	001
OUTP_118	BA13	XPT_OUT066P	001
OUTM_118	BA14	XPT_OUT066N	001
OUTP_119	BD13	XPT_OUT076P	001
OUTM_119	BD14	XPT_OUT076N	001

IC1401 (7/15)
M21165G-11

OUTP_120	L18	XPT_OUT085P	001
OUTM_120	L17	XPT_OUT085N	001
OUTP_121	G17	XPT_OUT096P	001
OUTM_121	G16	XPT_OUT096N	001
OUTP_122	K17	XPT_OUT084P	001
OUTM_122	K16	XPT_OUT084N	001
OUTP_123	E15	XPT_OUT106P	001
OUTM_123	E14	XPT_OUT106N	001
OUTP_124	AU15	XPT_OUT055P	001
OUTM_124	AU16	XPT_OUT055N	001
OUTP_125	AY15	XPT_OUT065P	001
OUTM_125	AY16	XPT_OUT065N	001
OUTP_126	AP15	XPT_OUT045P	001
OUTM_126	AP16	XPT_OUT045N	001
OUTP_127	AV13	XPT_OUT056P	001
OUTM_127	AV14	XPT_OUT056N	001
OUTP_128	D11	XPT_OUT103P	001
OUTM_128	D10	XPT_OUT103N	001
OUTP_129	A14	XPT_OUT115P	001
OUTM_129	A13	XPT_OUT115N	001
OUTP_130	B9	XPT_OUT112P	001
OUTM_130	B8	XPT_OUT112N	001
OUTP_131	A11	XPT_OUT113P	001
OUTM_131	A10	XPT_OUT113N	001
OUTP_132	BC6	XPT_OUT049P	001
OUTM_132	BC7	XPT_OUT049N	001
OUTP_133	BC12	XPT_OUT077P	001
OUTM_133	BC13	XPT_OUT077N	001
OUTP_134	BA10	XPT_OUT068P	001
OUTM_134	BA11	XPT_OUT068N	001
OUTP_135	BD10	XPT_OUT078P	001
OUTM_135	BD11	XPT_OUT078N	001
OUTP_136	H15	XPT_OUT095P	001
OUTM_136	H14	XPT_OUT095N	001
OUTP_137	G14	XPT_OUT094P	001
OUTM_137	G13	XPT_OUT094N	001
OUTP_138	L15	XPT_OUT083P	001
OUTM_138	L14	XPT_OUT083N	001
OUTP_139	E12	XPT_OUT104P	001
OUTM_139	E11	XPT_OUT104N	001
OUTP_140	AU12	XPT_OUT057P	001
OUTM_140	AU13	XPT_OUT057N	001
OUTP_141	AY12	XPT_OUT067P	001
OUTM_141	AY13	XPT_OUT067N	001
OUTP_142	AR13	XPT_OUT046P	001
OUTM_142	AR14	XPT_OUT046N	001
OUTP_143	AV10	XPT_OUT048P	001
OUTM_143	AV11	XPT_OUT048N	001
OUTP_144	D8	XPT_OUT101P	001
OUTM_144	D7	XPT_OUT101N	001
OUTP_145	A8	XPT_OUT111P	001
OUTM_145	A7	XPT_OUT111N	001
OUTP_146	B6	XPT_OUT081P	001
OUTM_146	B5	XPT_OUT081N	001
OUTP_147	A5	XPT_OUT091P	001
OUTM_147	A4	XPT_OUT091N	001
OUTP_148	BC3	XPT_OUT050P	001
OUTM_148	BC4	XPT_OUT050N	001
OUTP_149	BD7	XPT_OUT080P	001
OUTM_149	BD8	XPT_OUT080N	001
OUTP_150	BA7	XPT_OUT070P	001
OUTM_150	BA8	XPT_OUT070N	001
OUTP_151	BD4	XPT_OUT060P	001
OUTM_151	BD5	XPT_OUT060N	001
OUTP_152	K14	XPT_OUT082P	001
OUTM_152	K13	XPT_OUT082N	001
OUTP_153	G11	XPT_OUT092P	001
OUTM_153	G10	XPT_OUT092N	001
OUTP_154	H12	XPT_OUT093P	001
OUTM_154	H11	XPT_OUT093N	001
OUTP_155	E9	XPT_OUT102P	001
OUTM_155	E8	XPT_OUT102N	001
OUTP_156	AP12	XPT_OUT047P	001
OUTM_156	AP13	XPT_OUT047N	001
OUTP_157	AY9	XPT_OUT069P	001
OUTM_157	AY10	XPT_OUT069N	001
OUTP_158	AU9	XPT_OUT058P	001
OUTM_158	AU10	XPT_OUT058N	001
OUTP_159	AY6	XPT_OUT059P	001
OUTM_159	AY7	XPT_OUT059N	001

IC1401 (8/15)
M21165G-11

XPT-31/31A (16/17)
BOARD NO. 1-879-570-14
MVS-8000X_XPT-31_014_16

XPT-31/31A (17/17)

SUFFIX: -14

XPT-31/31A (17/17)

SUFFIX: -14

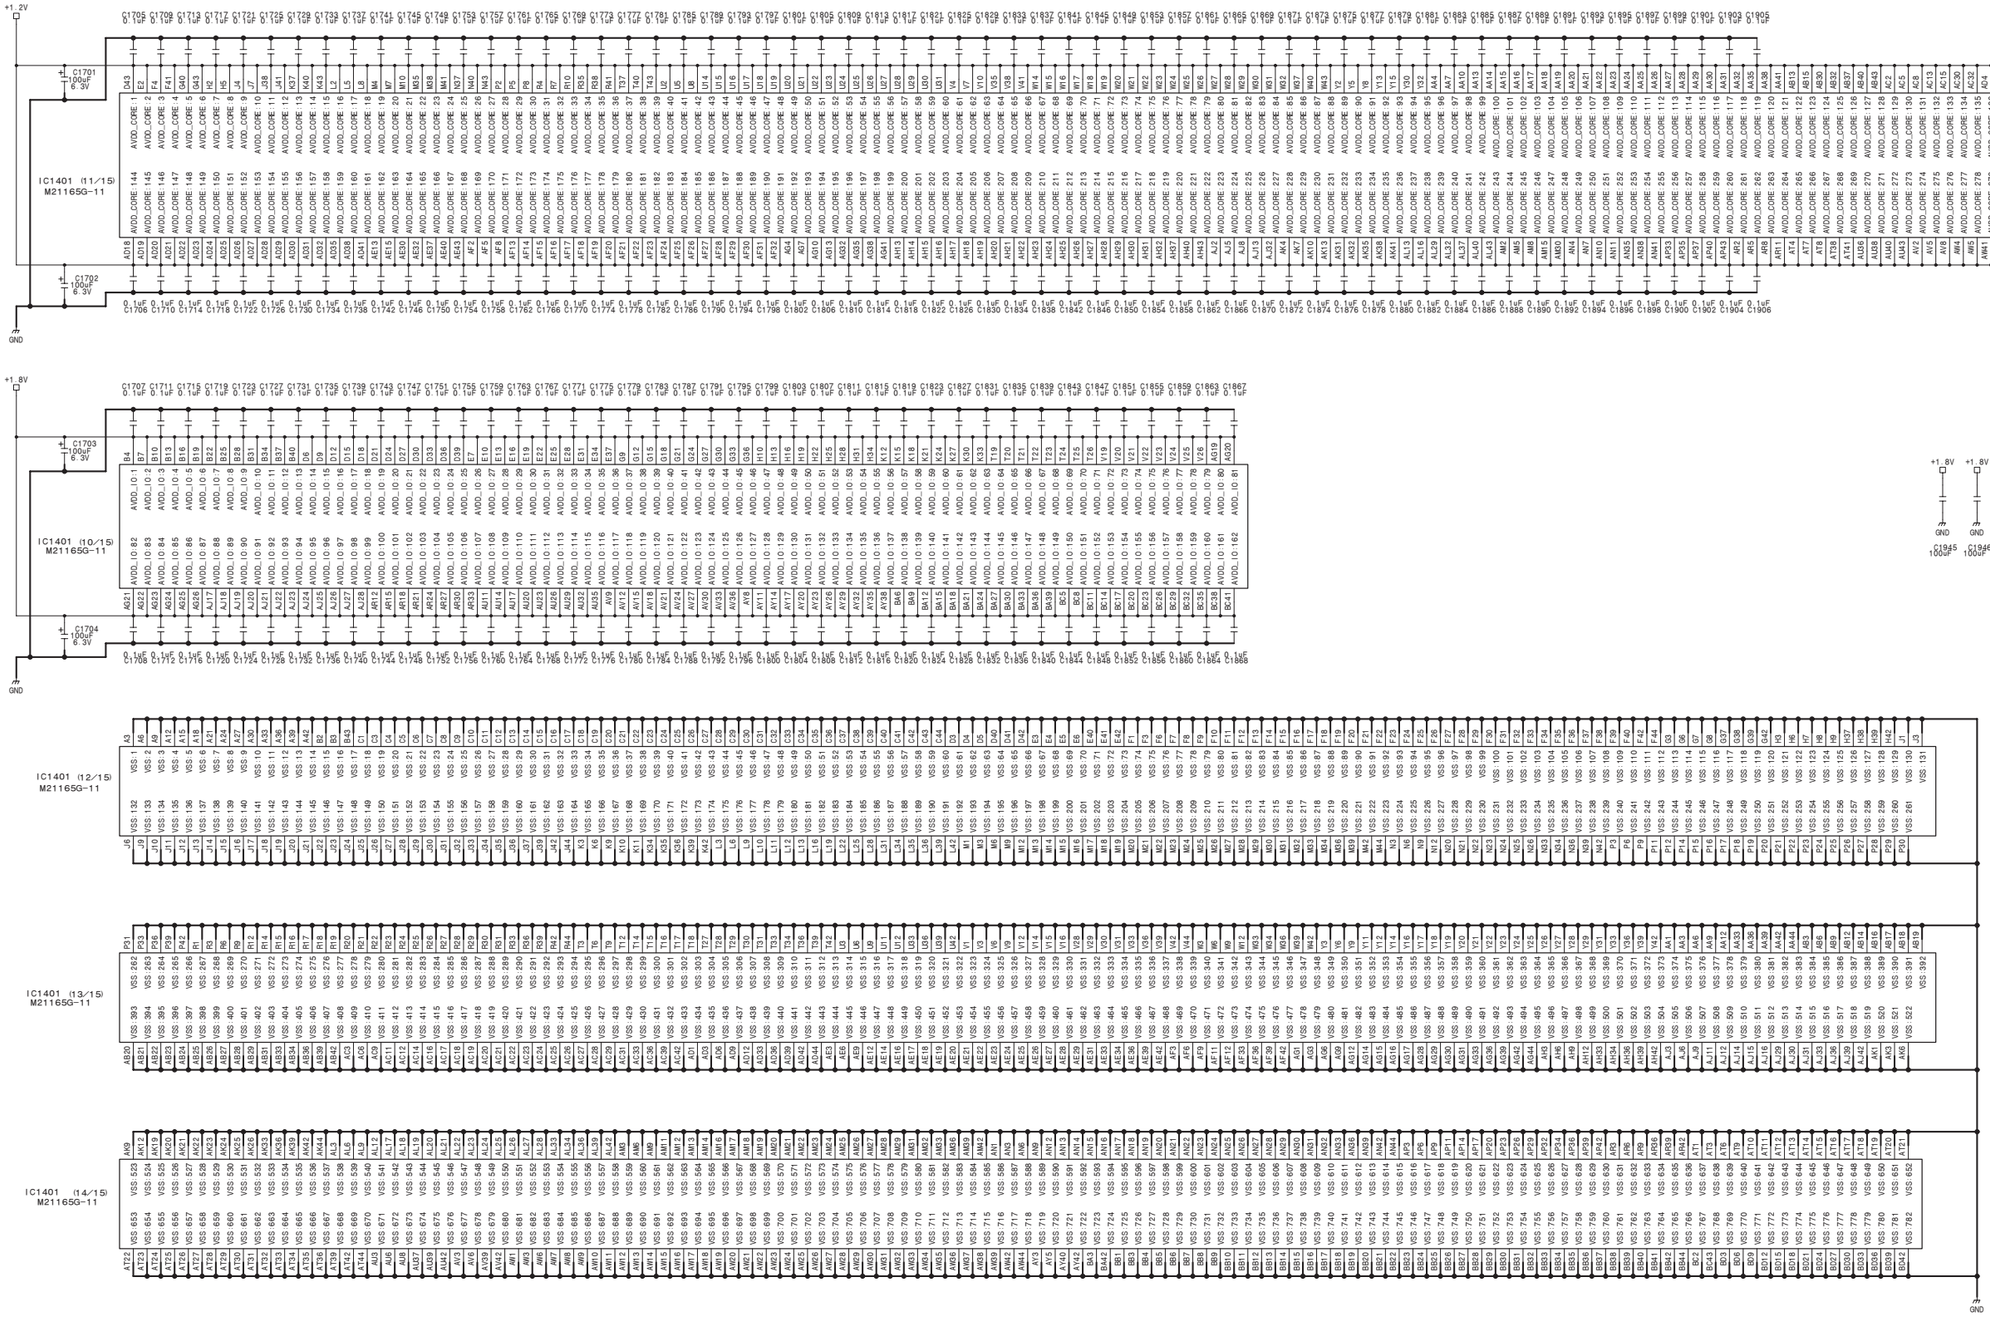

XPT-31/31A (17/17)

BOARD NO. 1-879-570-14

MVS-8000X_XPT-31_014_17

XPT-32 (1/13) SUFFIX: -13

Leftmost

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET	DC_ENBL	GND	(*X for CN1)	FUSE+12V	GND
6	GND (BD_EXT_SLF)		GND			GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9	VCLKP	VCLKN	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
10	FDP	FDN	GND	VDP	VDN	GND

CNC1

	A	B	BG	C	D	DG
1	ADRS1	ADRS2	GND	ADRS3	ADRS4	GND
2	ADRS5	ADRS6	GND	ADRS7	ADRS8	GND
3	ADRS9	ADRS10	GND	ADRS11	ADRS12	GND
4	ADRS13	ADRS14	GND	ADRS15	ADRS16	GND
5	DATA0	DATA1	GND	DATA2	DATA3	GND
6	DATA4	DATA5	GND	DATA6	DATA7	GND
7	DATA8	DATA9	GND	DATA10	DATA11	GND
8	DATA12	DATA13	GND	DATA14	DATA15	GND
9	CLK_INp	CLK_INn	GND	CSA_INn	CSB_INn	GND
10	WE_INn	WAIT_OUTn	GND	OE_INn	RESET_INn	GND

CND1

	A	B	BG	C	D	DG
1	DME_UTIL1BP	DME_UTIL1BN	GND	DME_UTIL2BP	DME_UTIL2BN	GND
2	DME_UTIL1AP	DME_UTIL1AN	GND	DME_UTIL2AP	DME_UTIL2AN	GND
3	XPT_IN001P	XPT_IN001N	GND	XPT_IN009P	XPT_IN009N	GND
4	XPT_IN002P	XPT_IN002N	GND	XPT_IN010P	XPT_IN010N	GND
5	XPT_IN003P	XPT_IN003N	GND	XPT_IN011P	XPT_IN011N	GND
6	XPT_IN004P	XPT_IN004N	GND	XPT_IN012P	XPT_IN012N	GND
7	XPT_IN005P	XPT_IN005N	GND	XPT_IN013P	XPT_IN013N	GND
8	XPT_IN006P	XPT_IN006N	GND	XPT_IN014P	XPT_IN014N	GND
9	XPT_IN007P	XPT_IN007N	GND	XPT_IN015P	XPT_IN015N	GND
10	XPT_IN008P	XPT_IN008N	GND	XPT_IN016P	XPT_IN016N	GND

CNE1

	A	B	BG	C	D	DG
1	XPT_IN017P	XPT_IN017N	GND	XPT_IN027P	XPT_IN027N	GND
2	XPT_IN018P	XPT_IN018N	GND	XPT_IN028P	XPT_IN028N	GND
3	XPT_IN019P	XPT_IN019N	GND	XPT_IN029P	XPT_IN029N	GND
4	XPT_IN020P	XPT_IN020N	GND	XPT_IN030P	XPT_IN030N	GND
5	XPT_IN021P	XPT_IN021N	GND	XPT_IN031P	XPT_IN031N	GND
6	XPT_IN022P	XPT_IN022N	GND	XPT_IN032P	XPT_IN032N	GND
7	XPT_IN023P	XPT_IN023N	GND	XPT_IN033P	XPT_IN033N	GND
8	XPT_IN024P	XPT_IN024N	GND	XPT_IN034P	XPT_IN034N	GND
9	XPT_IN025P	XPT_IN025N	GND	XPT_IN035P	XPT_IN035N	GND
10	XPT_IN026P	XPT_IN026N	GND	XPT_IN036P	XPT_IN036N	GND

CNG1

	A	B	BG	C	D	DG
1	XPT_OUT001P	XPT_OUT001N	GND	XPT_OUT011P	XPT_OUT011N	GND
2	XPT_OUT002P	XPT_OUT002N	GND	XPT_OUT012P	XPT_OUT012N	GND
3	XPT_OUT003P	XPT_OUT003N	GND	XPT_OUT013P	XPT_OUT013N	GND
4	XPT_OUT004P	XPT_OUT004N	GND	XPT_OUT014P	XPT_OUT014N	GND
5	XPT_OUT005P	XPT_OUT005N	GND	XPT_OUT015P	XPT_OUT015N	GND
6	XPT_OUT006P	XPT_OUT006N	GND	XPT_OUT016P	XPT_OUT016N	GND
7	XPT_OUT007P	XPT_OUT007N	GND	XPT_OUT017P	XPT_OUT017N	GND
8	XPT_OUT008P	XPT_OUT008N	GND	XPT_OUT018P	XPT_OUT018N	GND
9	XPT_OUT009P	XPT_OUT009N	GND	XPT_OUT019P	XPT_OUT019N	GND
10	XPT_OUT010P	XPT_OUT010N	GND	XPT_OUT020P	XPT_OUT020N	GND

CNJ1

	A	B	BG	C	D	DG
1	XPT_OUT021P	XPT_OUT021N	GND	XPT_OUT031P	XPT_OUT031N	GND
2	XPT_OUT022P	XPT_OUT022N	GND	XPT_OUT032P	XPT_OUT032N	GND
3	XPT_OUT023P	XPT_OUT023N	GND	XPT_OUT033P	XPT_OUT033N	GND
4	XPT_OUT024P	XPT_OUT024N	GND	XPT_OUT034P	XPT_OUT034N	GND
5	XPT_OUT025P	XPT_OUT025N	GND	XPT_OUT035P	XPT_OUT035N	GND
6	XPT_OUT026P	XPT_OUT026N	GND	XPT_OUT036P	XPT_OUT036N	GND
7	XPT_OUT027P	XPT_OUT027N	GND	XPT_OUT037P	XPT_OUT037N	GND
8	XPT_OUT028P	XPT_OUT028N	GND	XPT_OUT038P	XPT_OUT038N	GND
9	XPT_OUT029P	XPT_OUT029N	GND	XPT_OUT039P	XPT_OUT039N	GND
10	XPT_OUT030P	XPT_OUT030N	GND	XPT_OUT040P	XPT_OUT040N	GND

CNK1

	A	B	BG	C	D	DG
1	XPT_IN037P	XPT_IN037N	GND	XPT_IN047P	XPT_IN047N	GND
2	XPT_IN038P	XPT_IN038N	GND	XPT_IN048P	XPT_IN048N	GND
3	XPT_IN039P	XPT_IN039N	GND	XPT_IN049P	XPT_IN049N	GND
4	XPT_IN040P	XPT_IN040N	GND	XPT_IN050P	XPT_IN050N	GND
5	XPT_IN041P	XPT_IN041N	GND	XPT_IN051P	XPT_IN051N	GND
6	XPT_IN042P	XPT_IN042N	GND	XPT_IN052P	XPT_IN052N	GND
7	XPT_IN043P	XPT_IN043N	GND	XPT_IN053P	XPT_IN053N	GND
8	XPT_IN044P	XPT_IN044N	GND	XPT_IN054P	XPT_IN054N	GND
9	XPT_IN045P	XPT_IN045N	GND	XPT_IN055P	XPT_IN055N	GND
10	XPT_IN046P	XPT_IN046N	GND	XPT_IN056P	XPT_IN056N	GND

CNL1

	A	B	BG	C	D	DG
1	XPT_IN057P	XPT_IN057N	GND	XPT_IN067P	XPT_IN067N	GND
2	XPT_IN058P	XPT_IN058N	GND	XPT_IN068P	XPT_IN068N	GND
3	XPT_IN059P	XPT_IN059N	GND	XPT_IN069P	XPT_IN069N	GND
4	XPT_IN060P	XPT_IN060N	GND	XPT_IN070P	XPT_IN070N	GND
5	XPT_IN061P	XPT_IN061N	GND	XPT_IN071P	XPT_IN071N	GND
6	XPT_IN062P	XPT_IN062N	GND	XPT_IN072P	XPT_IN072N	GND
7	XPT_IN063P	XPT_IN063N	GND	XPT_IN073P	XPT_IN073N	GND
8	XPT_IN064P	XPT_IN064N	GND	XPT_IN074P	XPT_IN074N	GND
9	XPT_IN065P	XPT_IN065N	GND	XPT_IN075P	XPT_IN075N	GND
10	XPT_IN066P	XPT_IN066N	GND	XPT_IN076P	XPT_IN076N	GND

CNN1

	A	B	BG	C	D	DG
1	XPT_OUT041P	XPT_OUT041N	GND	XPT_OUT051P	XPT_OUT051N	GND
2	XPT_OUT042P	XPT_OUT042N	GND	XPT_OUT052P	XPT_OUT052N	GND
3	XPT_OUT043P	XPT_OUT043N	GND	XPT_OUT053P	XPT_OUT053N	GND
4	XPT_OUT044P	XPT_OUT044N	GND	XPT_OUT054P	XPT_OUT054N	GND
5	XPT_OUT045P	XPT_OUT045N	GND	XPT_OUT055P	XPT_OUT055N	GND
6	XPT_OUT046P	XPT_OUT046N	GND	XPT_OUT056P	XPT_OUT056N	GND
7	XPT_OUT047P	XPT_OUT047N	GND	XPT_OUT057P	XPT_OUT057N	GND
8	XPT_OUT048P	XPT_OUT048N	GND	XPT_OUT058P	XPT_OUT058N	GND
9	XPT_OUT049P	XPT_OUT049N	GND	XPT_OUT059P	XPT_OUT059N	GND
10	XPT_OUT050P	XPT_OUT050N	GND	XPT_OUT060P	XPT_OUT060N	GND

CNP1

	A	B	BG	C	D	DG
1	XPT_OUT061P	XPT_OUT061N	GND	XPT_OUT071P	XPT_OUT071N	GND
2	XPT_OUT062P	XPT_OUT062N	GND	XPT_OUT072P	XPT_OUT072N	GND
3	XPT_OUT063P	XPT_OUT063N	GND	XPT_OUT073P	XPT_OUT073N	GND
4	XPT_OUT064P	XPT_OUT064N	GND	XPT_OUT074P	XPT_OUT074N	GND
5	XPT_OUT065P	XPT_OUT065N	GND	XPT_OUT075P	XPT_OUT075N	GND
6	XPT_OUT066P	XPT_OUT066N	GND	XPT_OUT076P	XPT_OUT076N	GND
7	XPT_OUT067P	XPT_OUT067N	GND	XPT_OUT077P	XPT_OUT077N	GND
8	XPT_OUT068P	XPT_OUT068N	GND	XPT_OUT078P	XPT_OUT078N	GND
9	XPT_OUT069P	XPT_OUT069N	GND	XPT_OUT079P	XPT_OUT079N	GND
10	XPT_OUT070P	XPT_OUT070N	GND	XPT_OUT080P	XPT_OUT080N	GND

Rightmost

XPT-32 (1/13)

BOARD NO. 1-879-571-13

MVS-8000X_XPT-32_013_1

XPT-32 (2/13)
SUFFIX: -13

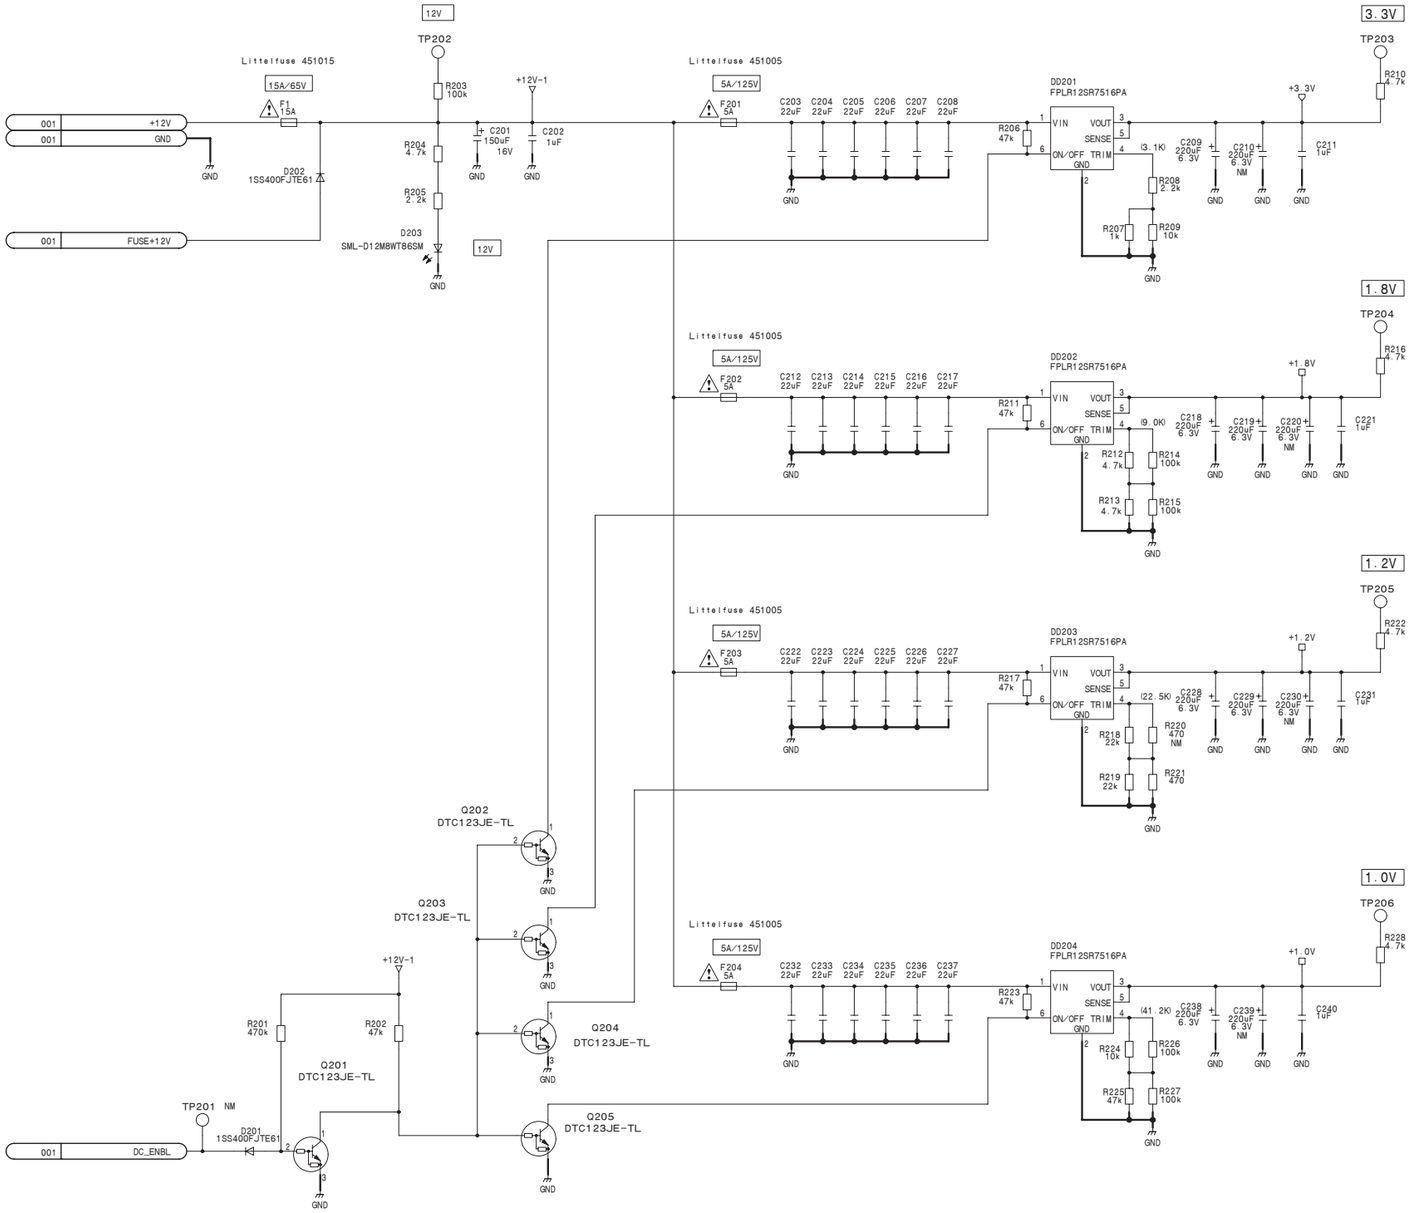



XPT-32 (2/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_2

XPT-32 (3/13)

SUFFIX: -13

XPT-32 (3/13)
SUFFIX: -13

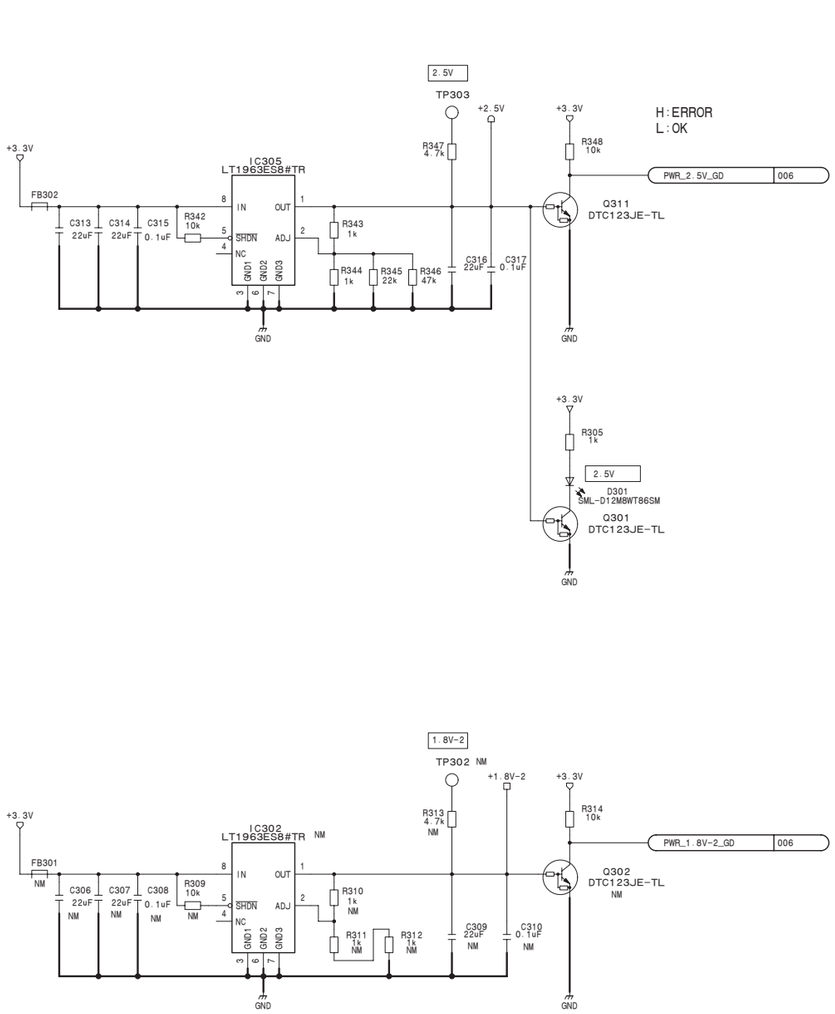

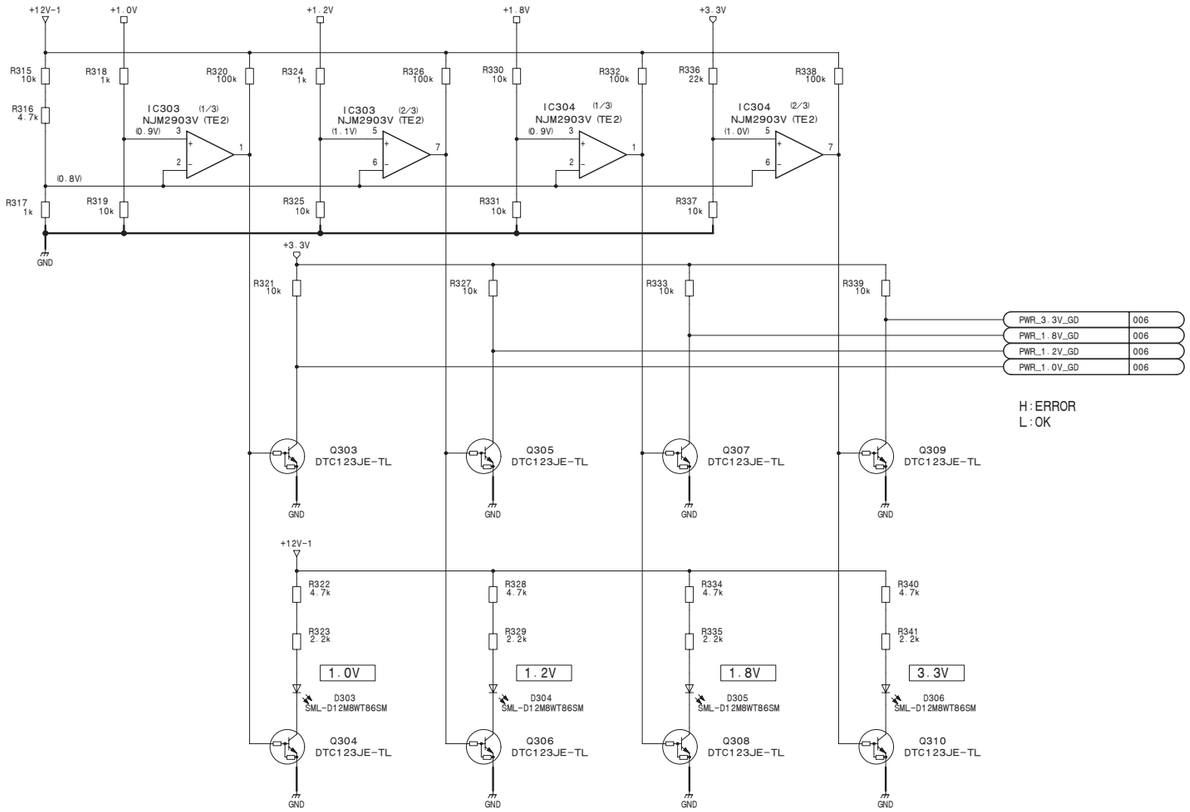



XPT-32 (3/13)

BOARD NO. 1-879-571-13

MVS-8000X_XPT-32_013_3

XPT-32 (4/13) **SUFFIX: -13**

CLK

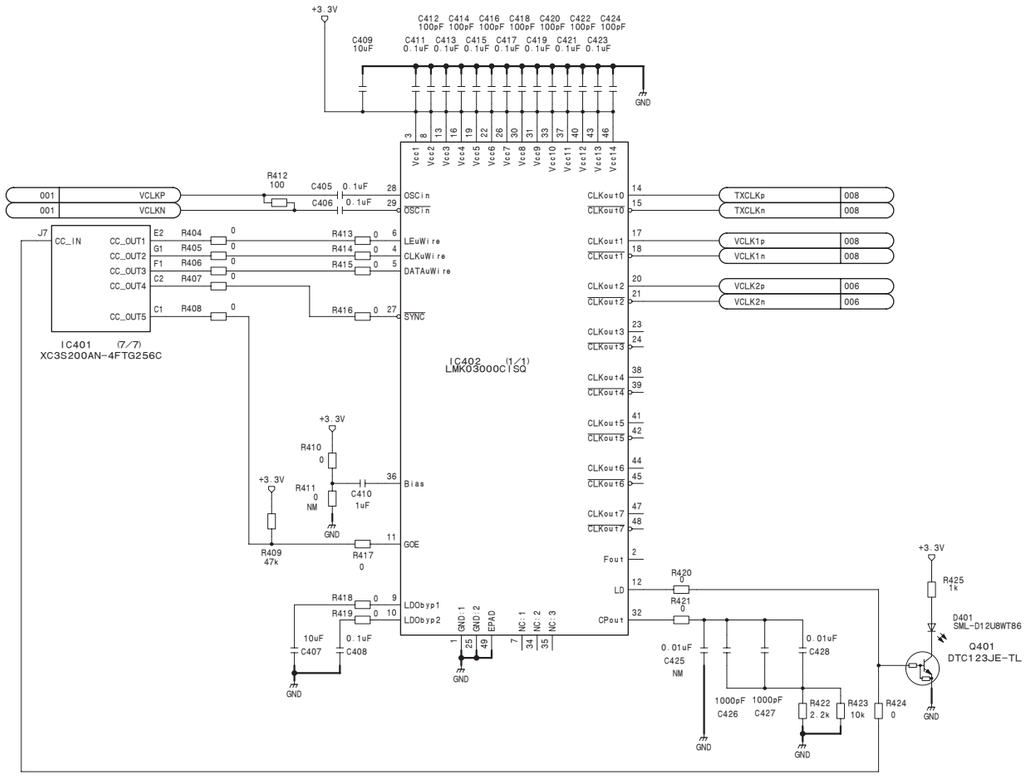

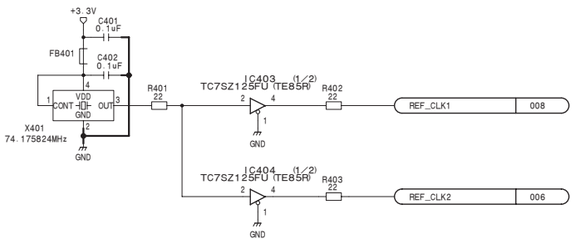

CPU I/F

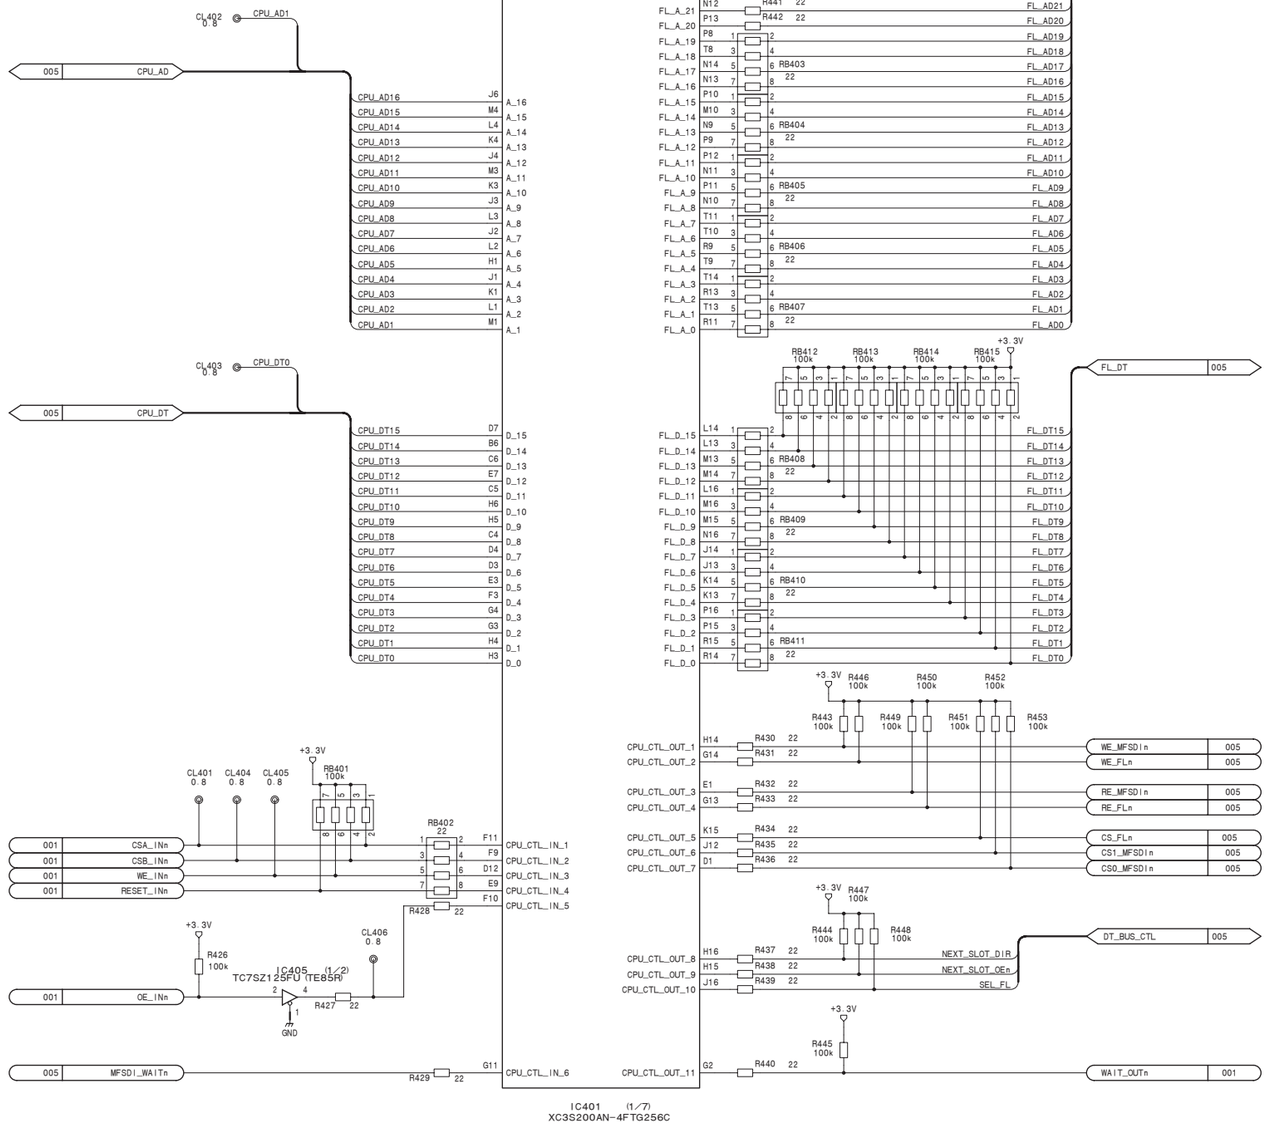

XPT-32 (4/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_4

XPT-32 (5/13)
SUFFIX: -13

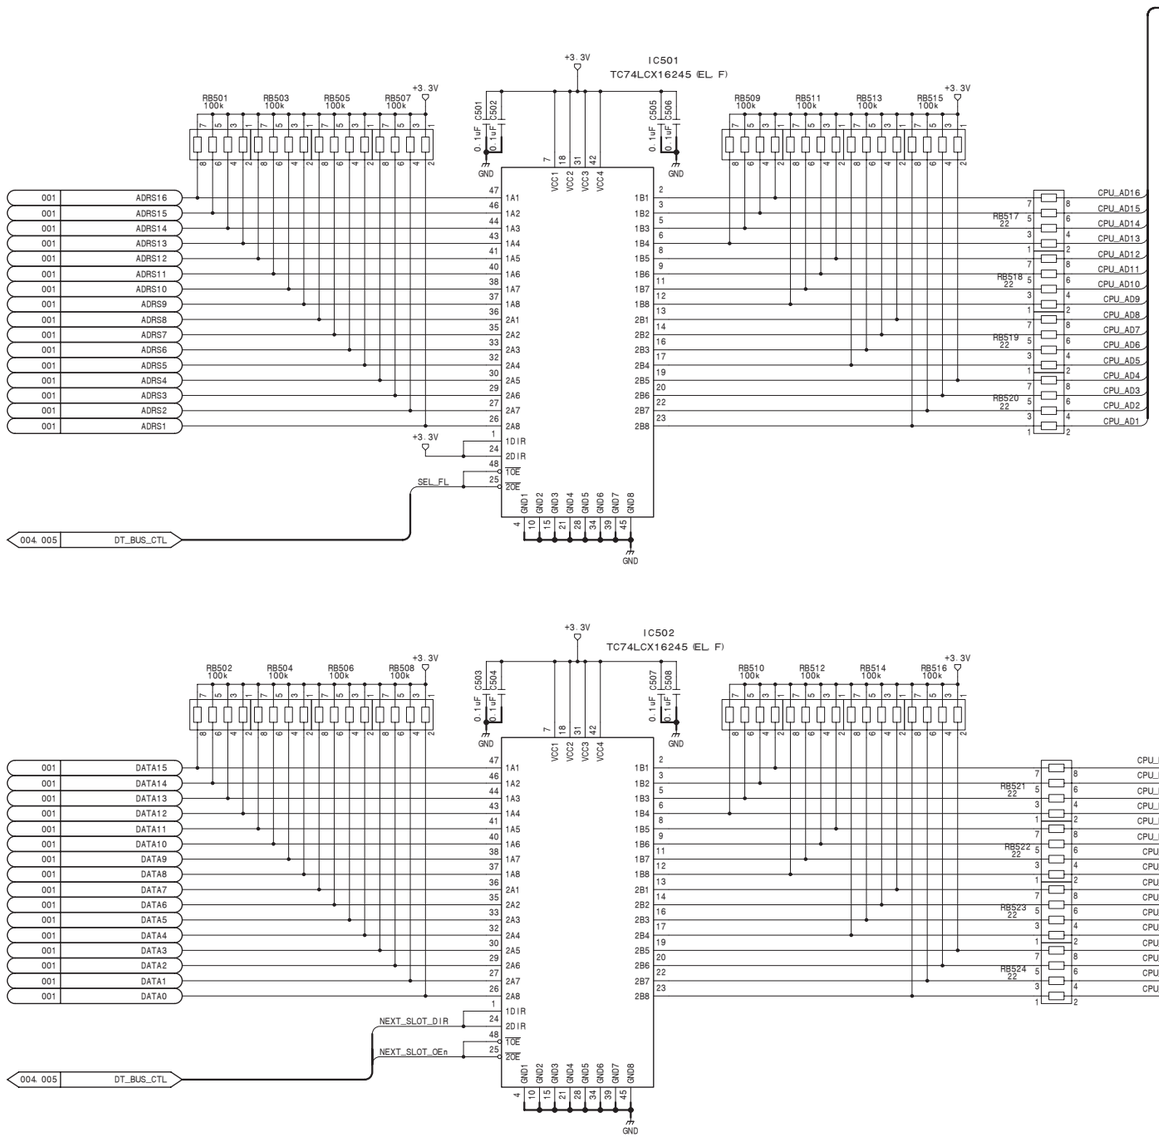

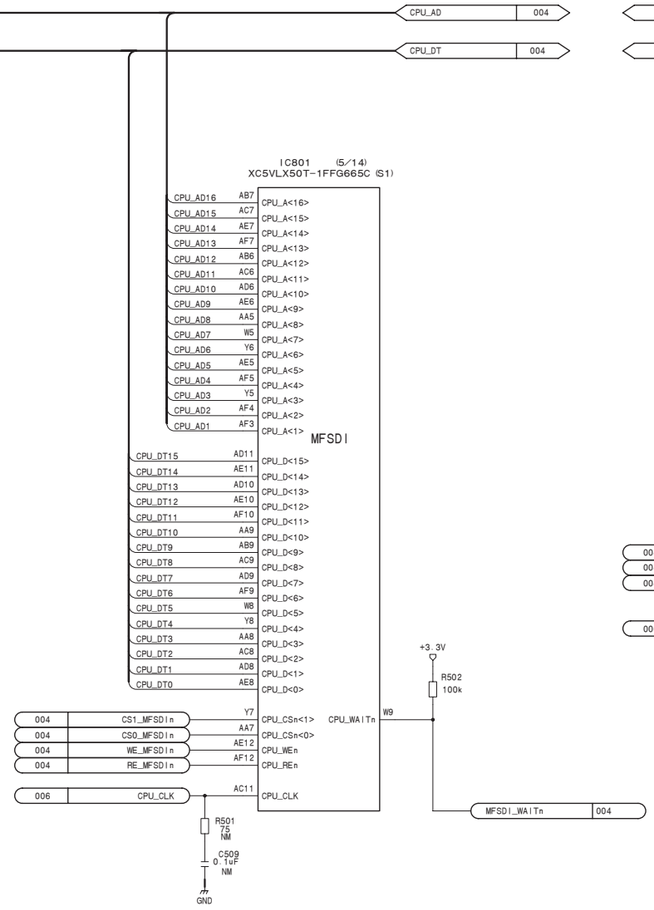

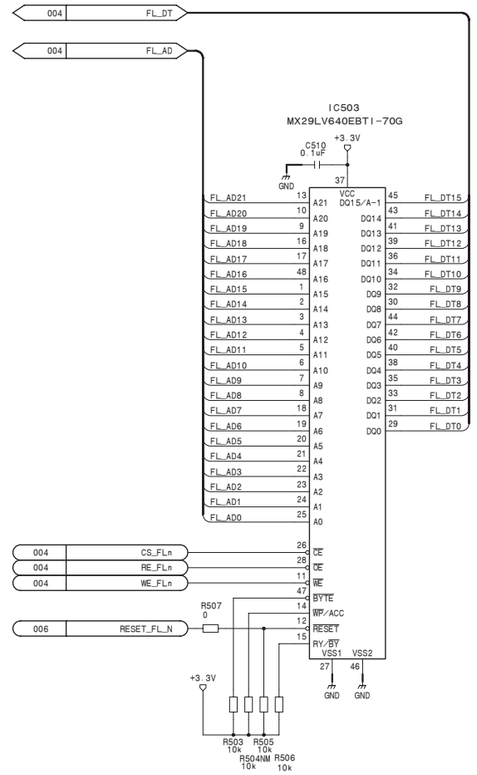

XPT-32 (5/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_5

DEV CTL

XPT-32 (6/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_6

XPT-32 (7/13)
SUFFIX: -13

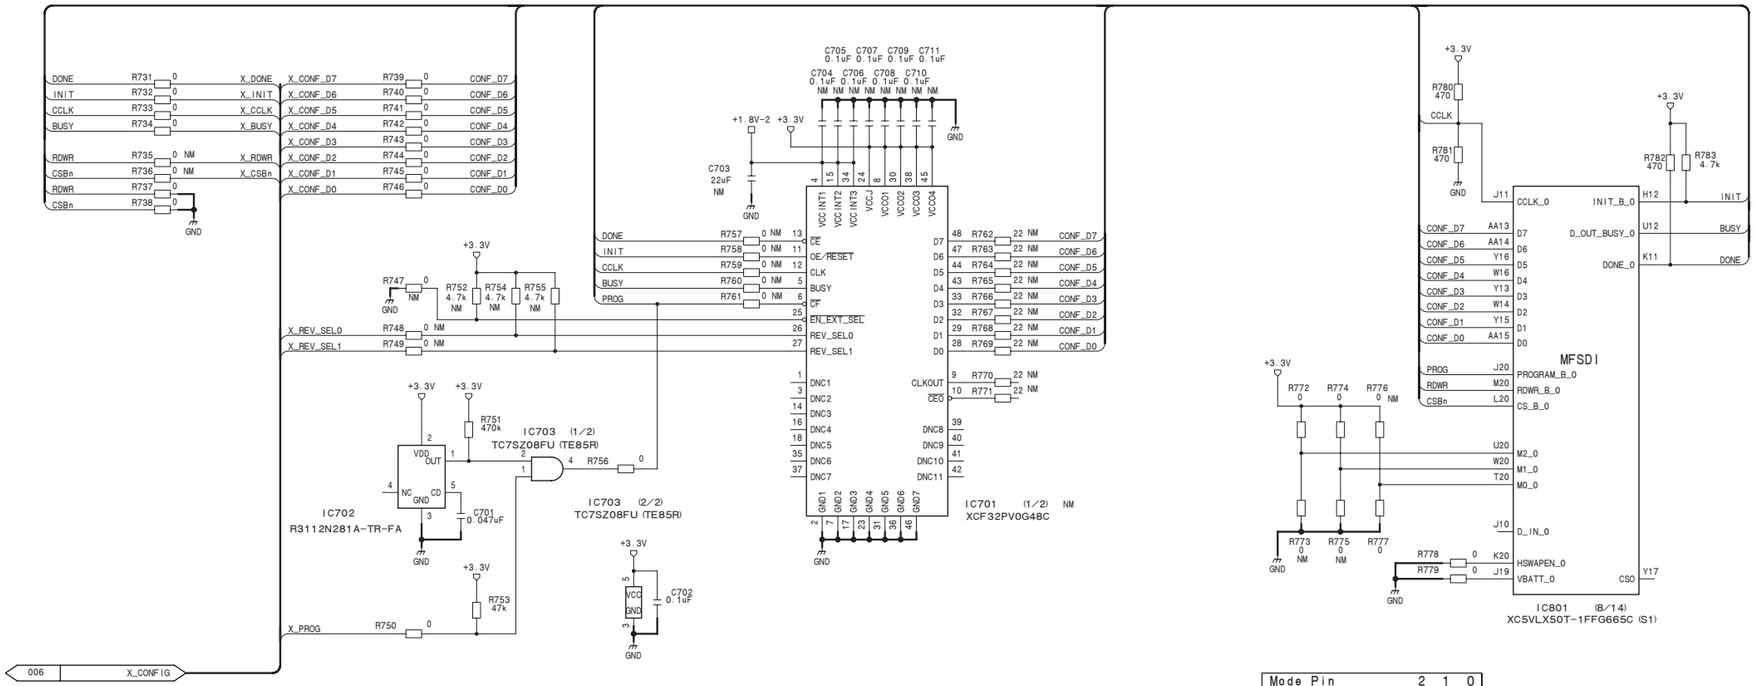

Mode Pin	2	1	0
Slave SelectMAP	H	H	L
Master SelectMAP	H	L	L

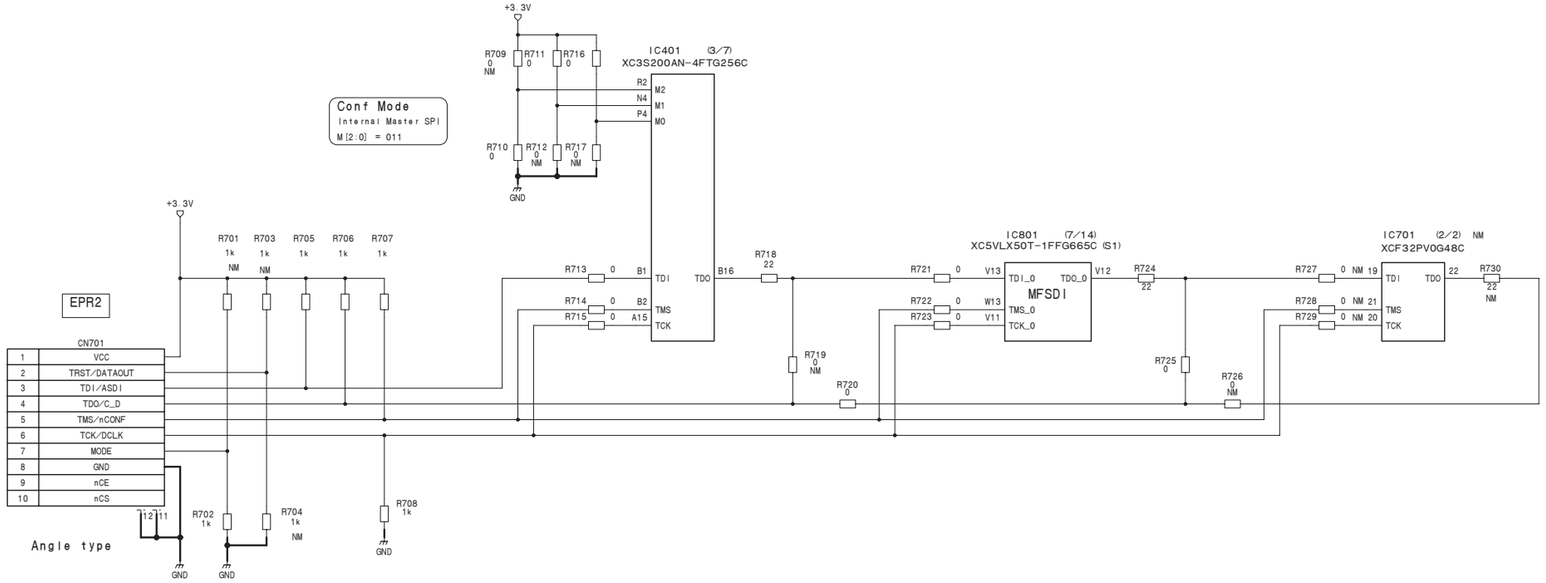

JTAG_CHAIN \ Ref	R2019	R2021	R2026
CADEC (IC1)	M't	N.Mt	N.Mt
FULL	N.Mt	M't	M't

XPT-32 (7/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_7

XPT-32 (8/13)
SUFFIX: -13

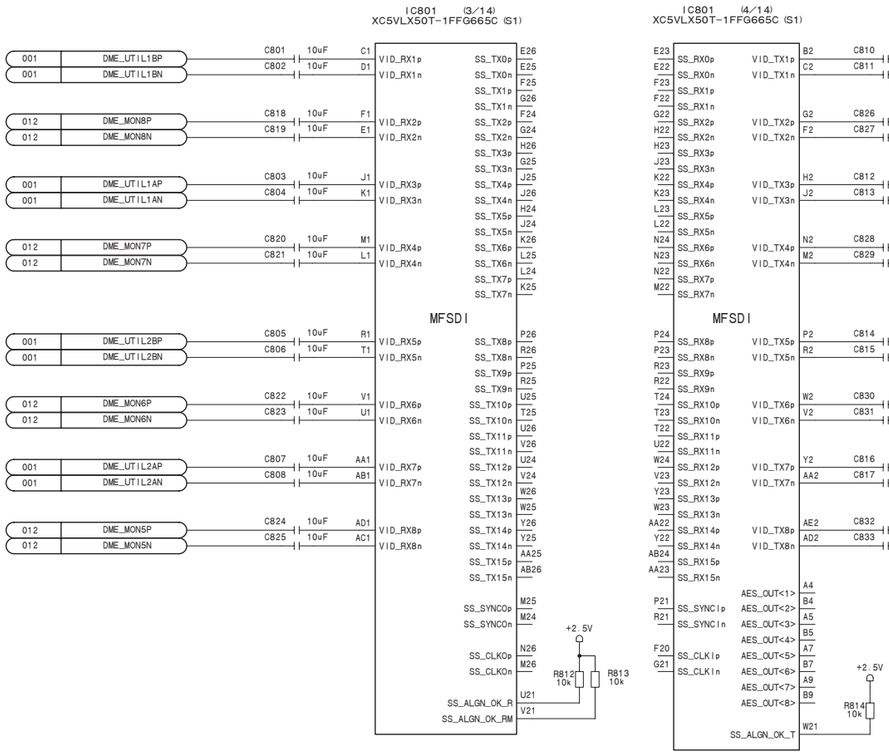

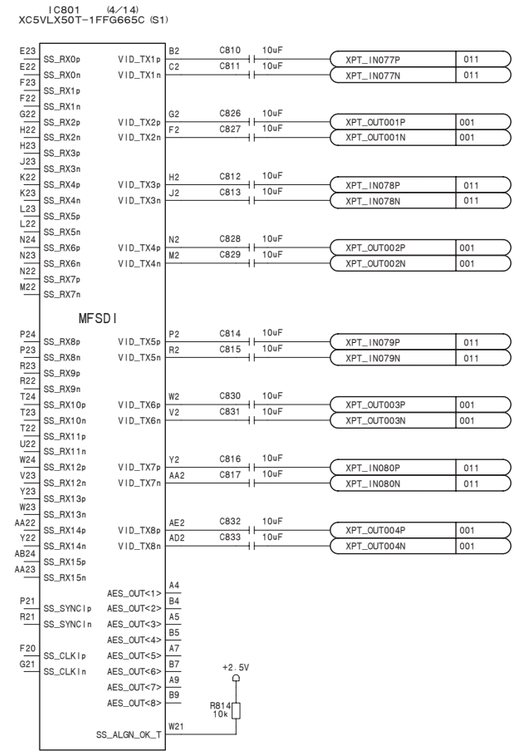

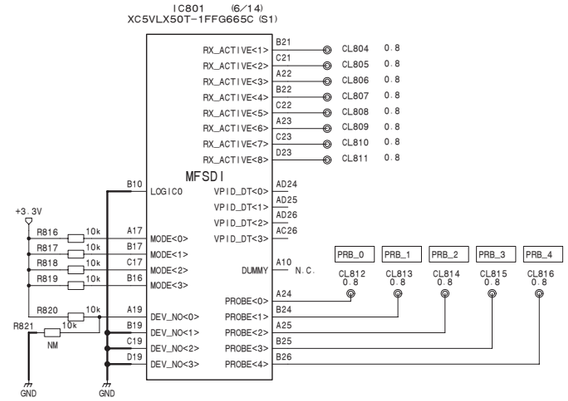



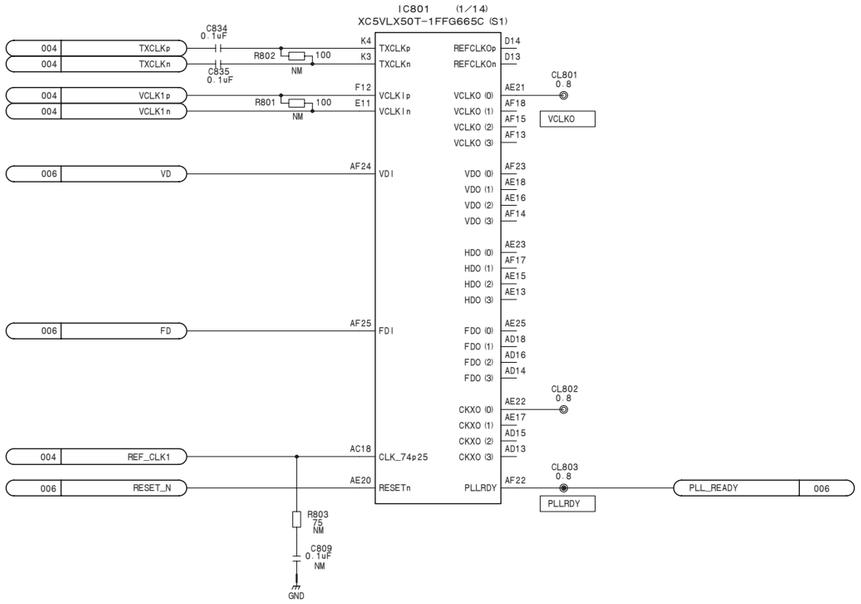

XPT-32 (8/13)

BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_8

XPT-32 (9/13)
SUFFIX: -13

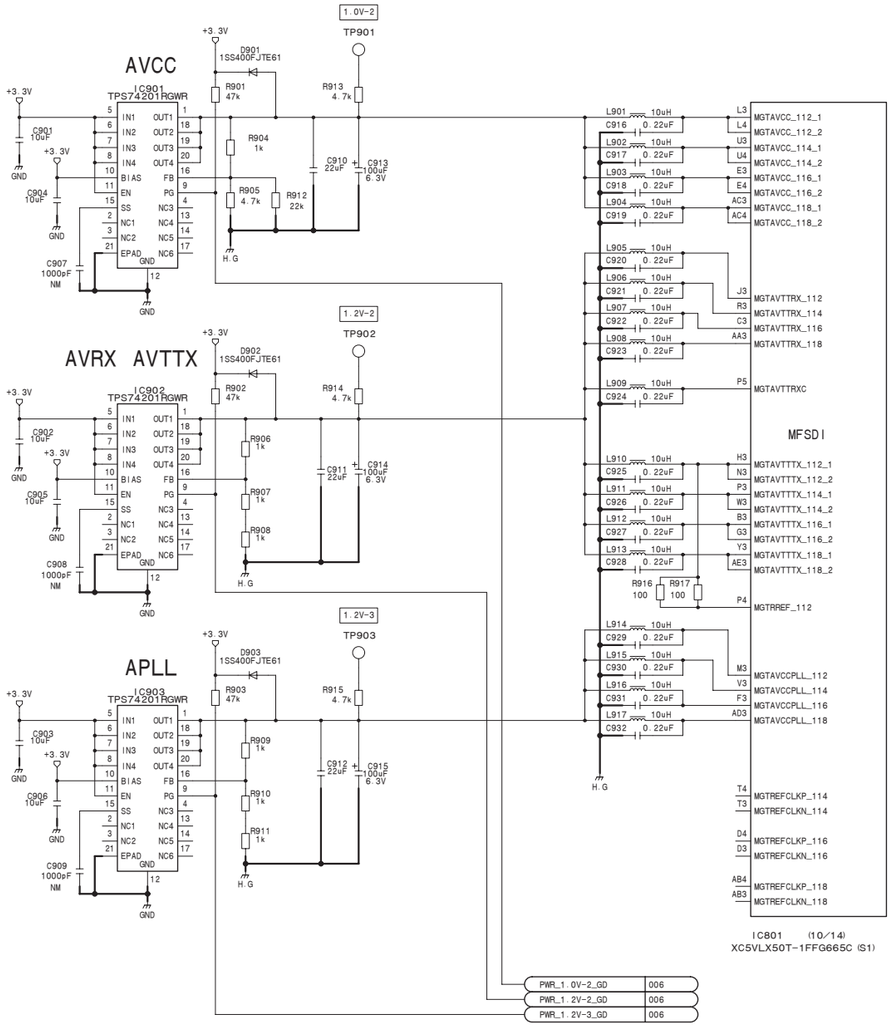



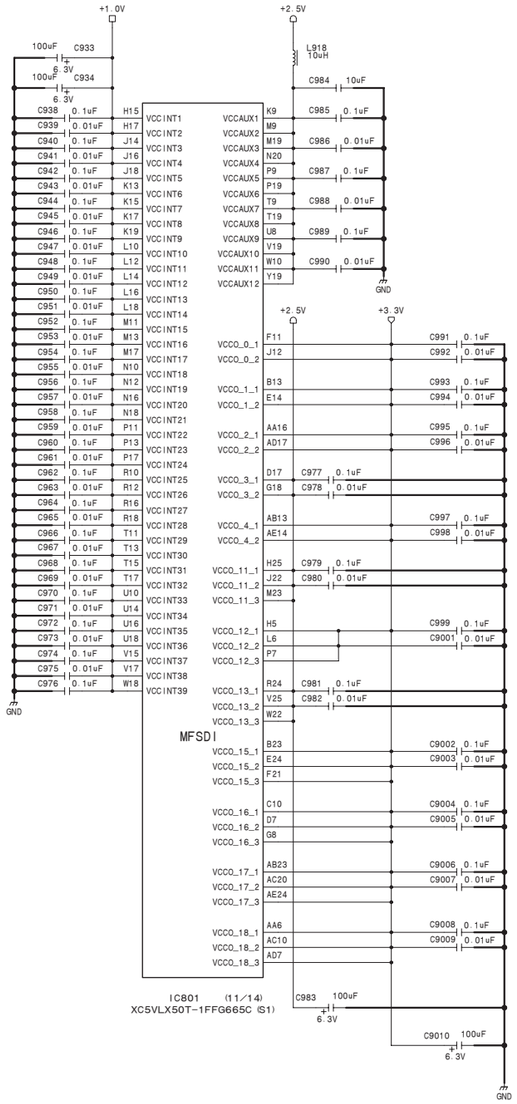



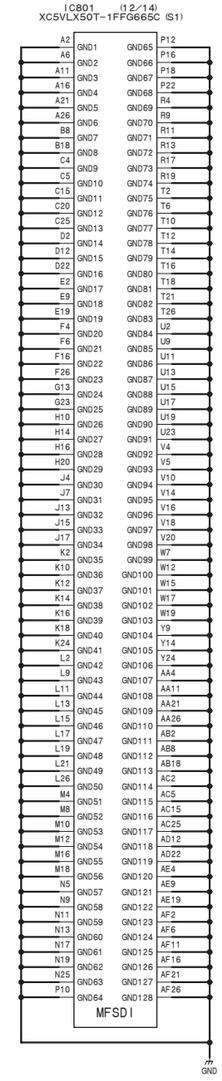

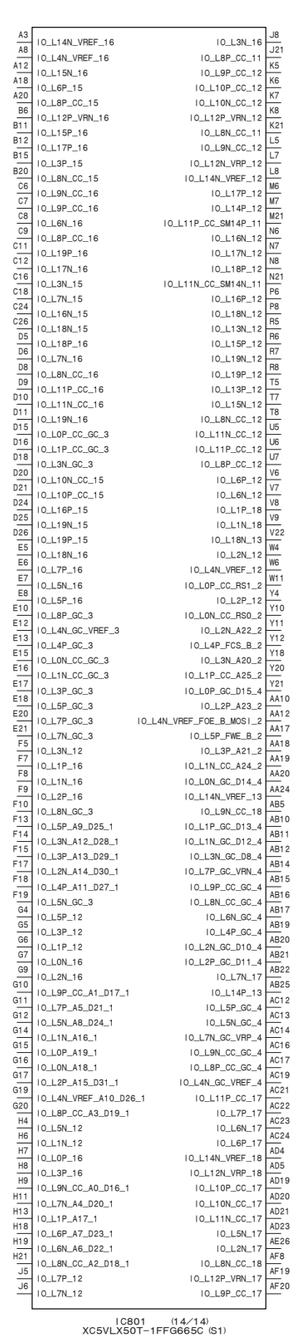

XPT-32 (9/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_9

XPT-32 (10/13)
SUFFIX: -13

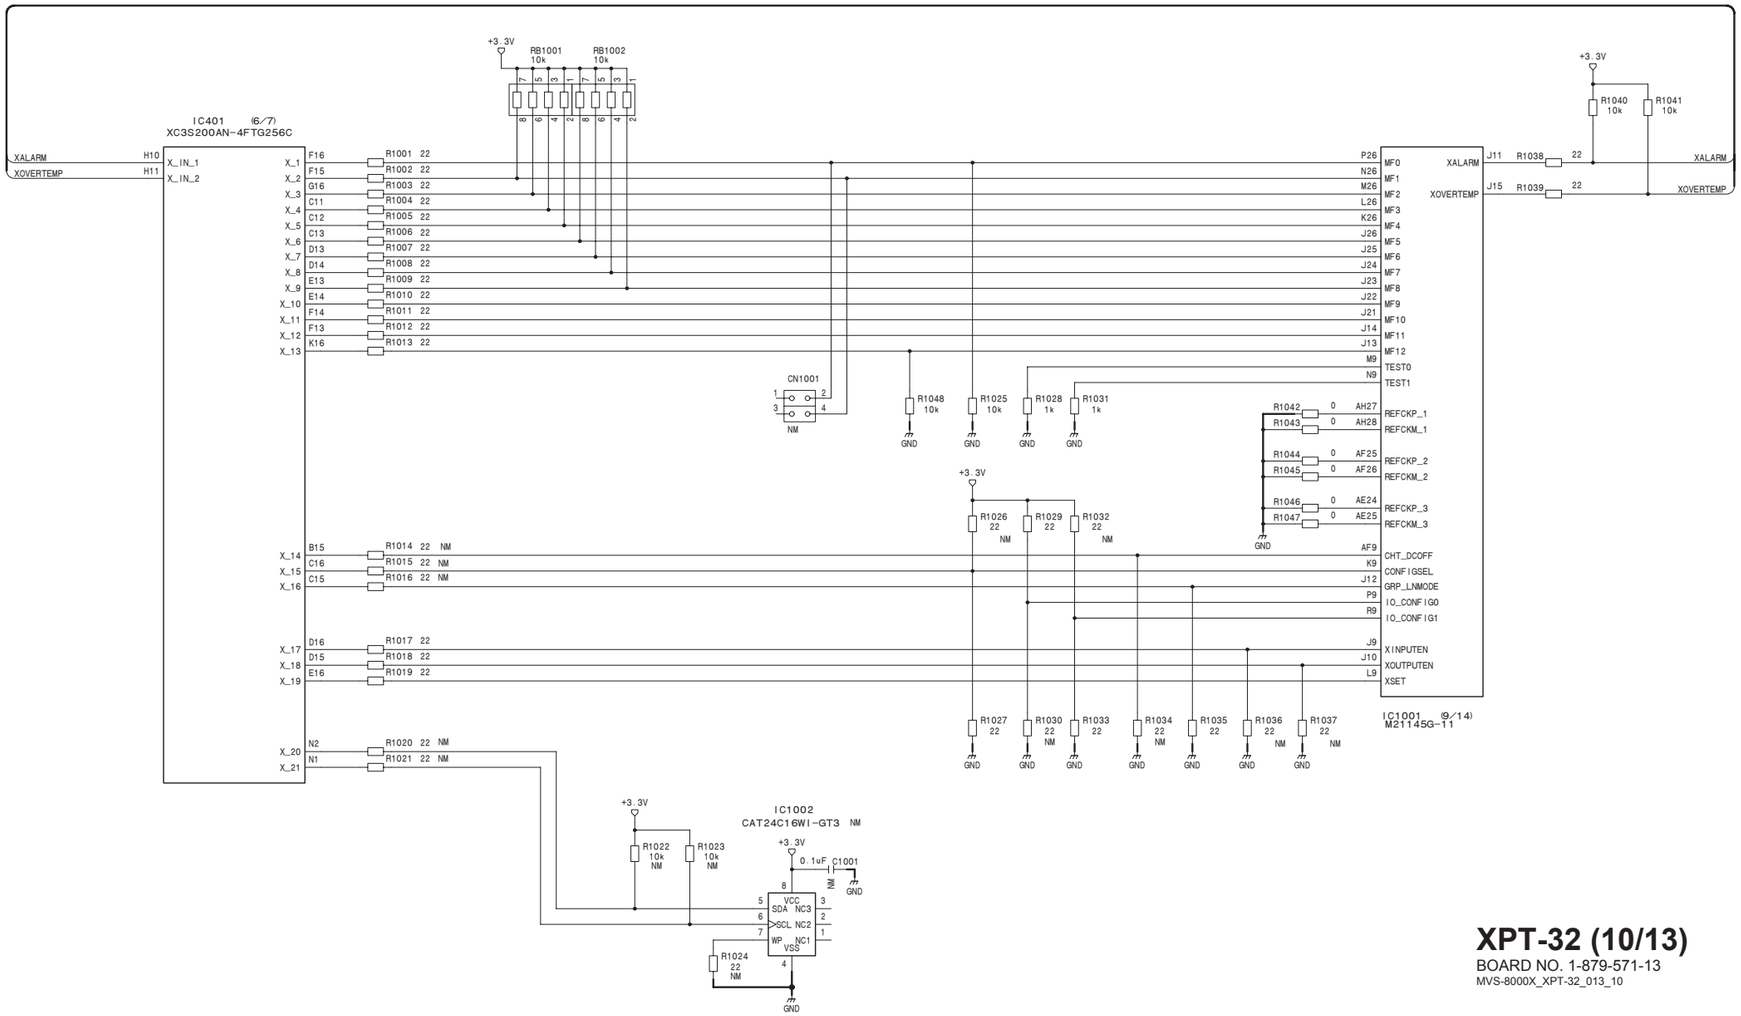

XPT-32 (10/13)

BOARD NO. 1-879-571-13

MVS-8000X_XPT-32_013_10

XPT-32 (11/13)

SUFFIX: -13

XPT-32 (11/13)

SUFFIX: -13

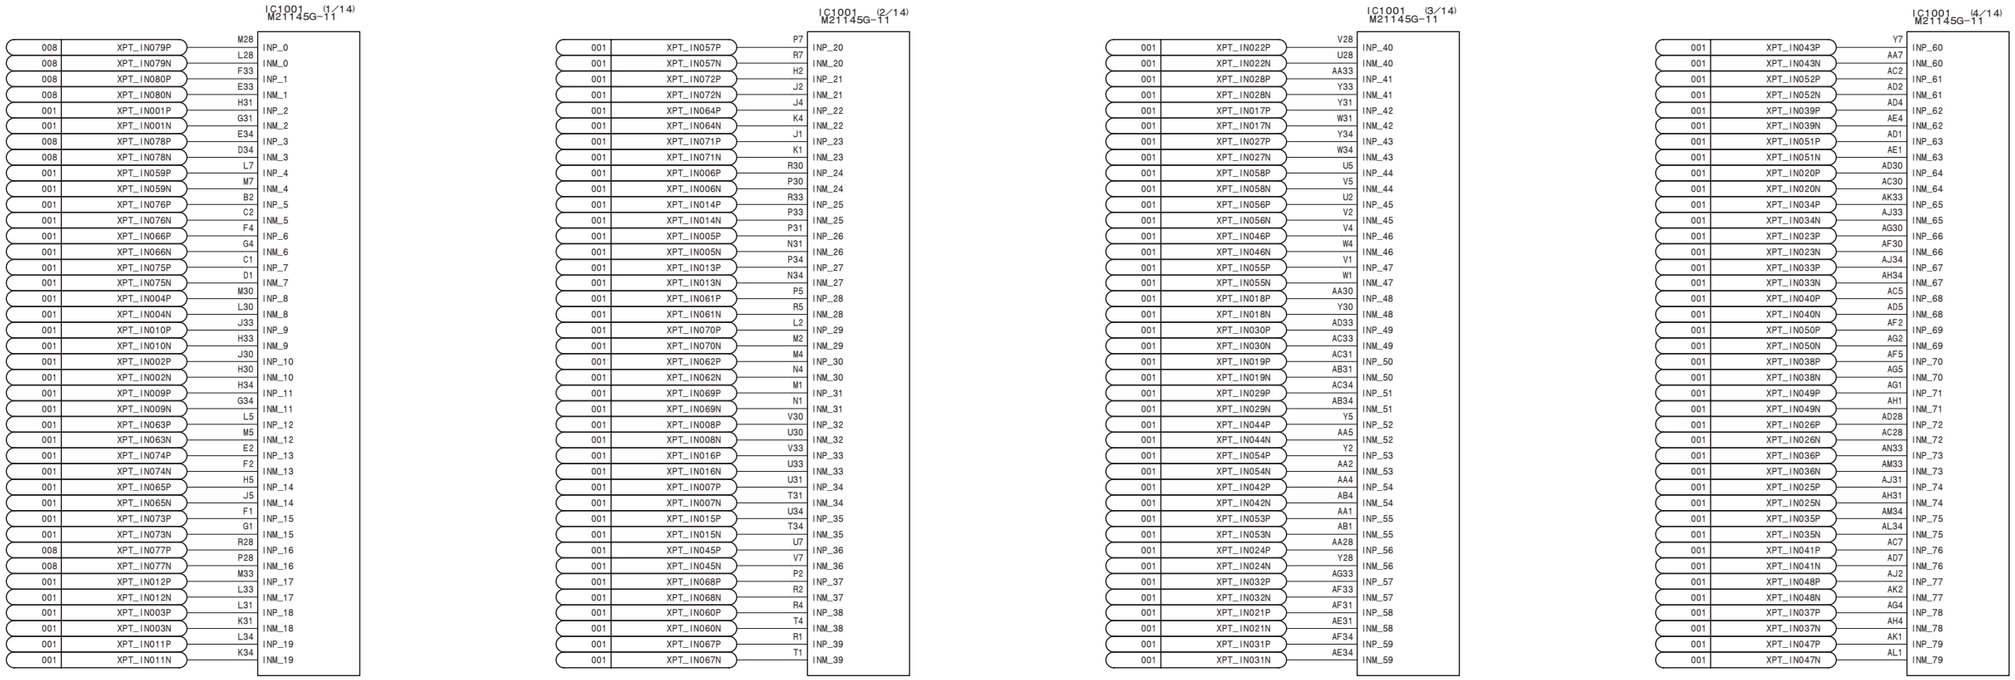

XPT-32 (11/13)

BOARD NO. 1-879-571-13

MVS-8000X_XPT-32_013_11

XPT-32 (12/13)
SUFFIX: -13

XPT-32 (12/13)
SUFFIX: -13

IC1001 (5/14) M21145G-11

OUTP_0	B32	XPT_OUT080P	001
OUTM_0	B33	XPT_OUT080N	001
OUTP_1	A32	XPT_OUT079P	001
OUTM_1	A31	XPT_OUT079N	001
OUTP_2	B29	XPT_OUT069P	001
OUTM_2	B30	XPT_OUT069N	001
OUTP_3	A29	XPT_OUT077P	001
OUTM_3	A28	XPT_OUT077N	001
OUTP_4	AN29	XPT_OUT012P	001
OUTM_4	AN30	XPT_OUT012N	001
OUTP_5	AP30	XPT_OUT011P	001
OUTM_5	AP31	XPT_OUT011N	001
OUTP_6	AN26	XPT_OUT014P	001
OUTM_6	AN27	XPT_OUT014N	001
OUTP_7	AP27	XPT_OUT013P	001
OUTM_7	AP28	XPT_OUT013N	001
OUTP_8	G23	XPT_OUT068P	001
OUTM_8	G24	XPT_OUT068N	001
OUTP_9	D28	XPT_OUT070P	001
OUTM_9	D29	XPT_OUT070N	001
OUTP_10	E23	XPT_OUT074P	001
OUTM_10	E24	XPT_OUT074N	001
OUTP_11	E26	XPT_OUT078P	001
OUTM_11	E27	XPT_OUT078N	001
OUTP_12	AH23	XPT_OUT009P	001
OUTM_12	AH24	XPT_OUT009N	001
OUTP_13	AL27	DME_MON8P	008
OUTM_13	AL28	DME_MON8N	008
OUTP_14	AK23	DME_MON5P	008
OUTM_14	AK24	DME_MON5N	008
OUTP_15	AK26	DME_MON7P	008
OUTM_15	AK27	DME_MON7N	008
OUTP_16	B26	XPT_OUT067P	001
OUTM_16	B27	XPT_OUT067N	001
OUTP_17	A26	XPT_OUT075P	001
OUTM_17	A25	XPT_OUT075N	001
OUTP_18	B23	XPT_OUT065P	001
OUTM_18	B24	XPT_OUT065N	001
OUTP_19	A23	XPT_OUT073P	001
OUTM_19	A22	XPT_OUT073N	001

IC1001 (6/14) M21145G-11

OUTP_20	AN23	XPT_OUT016P	001
OUTM_20	AN24	XPT_OUT016N	001
OUTP_21	AP24	XPT_OUT015P	001
OUTM_21	AP25	XPT_OUT015N	001
OUTP_22	AN20	XPT_OUT018P	001
OUTM_22	AN21	XPT_OUT018N	001
OUTP_23	AP21	XPT_OUT017P	001
OUTM_23	AP22	XPT_OUT017N	001
OUTP_24	G20	XPT_OUT064P	001
OUTM_24	G21	XPT_OUT064N	001
OUTP_25	D25	XPT_OUT076P	001
OUTM_25	D26	XPT_OUT076N	001
OUTP_26	E20	XPT_OUT072P	001
OUTM_26	E21	XPT_OUT072N	001
OUTP_27	D22	XPT_OUT066P	001
OUTM_27	D23	XPT_OUT066N	001
OUTP_28	AH20	XPT_OUT010P	001
OUTM_28	AH21	XPT_OUT010N	001
OUTP_29	AL24	DME_MON6P	008
OUTM_29	AL25	DME_MON6N	008
OUTP_30	AK20	XPT_OUT006P	001
OUTM_30	AK21	XPT_OUT006N	001
OUTP_31	AL21	XPT_OUT005P	001
OUTM_31	AL22	XPT_OUT005N	001
OUTP_32	B20	XPT_OUT063P	001
OUTM_32	B21	XPT_OUT063N	001
OUTP_33	A20	XPT_OUT071P	001
OUTM_33	A19	XPT_OUT071N	001
OUTP_34	B17	XPT_OUT061P	001
OUTM_34	B18	XPT_OUT061N	001
OUTP_35	A17	XPT_OUT059P	001
OUTM_35	A16	XPT_OUT059N	001
OUTP_36	AN17	XPT_OUT020P	001
OUTM_36	AN18	XPT_OUT020N	001
OUTP_37	AP18	XPT_OUT019P	001
OUTM_37	AP19	XPT_OUT019N	001
OUTP_38	AN14	XPT_OUT032P	001
OUTM_38	AN15	XPT_OUT032N	001
OUTP_39	AP15	XPT_OUT031P	001
OUTM_39	AP16	XPT_OUT031N	001

IC1001 (7/14) M21145G-11

OUTP_40	G17	XPT_OUT050P	001
OUTM_40	G18	XPT_OUT050N	001
OUTP_41	D19	XPT_OUT062P	001
OUTM_41	D20	XPT_OUT062N	001
OUTP_42	E17	XPT_OUT060P	001
OUTM_42	E18	XPT_OUT060N	001
OUTP_43	D16	XPT_OUT048P	001
OUTM_43	D17	XPT_OUT048N	001
OUTP_44	AK17	XPT_OUT008P	001
OUTM_44	AK18	XPT_OUT008N	001
OUTP_45	AL18	XPT_OUT007P	001
OUTM_45	AL19	XPT_OUT007N	001
OUTP_46	AH17	XPT_OUT021P	001
OUTM_46	AH18	XPT_OUT021N	001
OUTP_47	AL15	XPT_OUT024P	001
OUTM_47	AL16	XPT_OUT024N	001
OUTP_48	B14	XPT_OUT049P	001
OUTM_48	B15	XPT_OUT049N	001
OUTP_49	A14	XPT_OUT057P	001
OUTM_49	A13	XPT_OUT057N	001
OUTP_50	B11	XPT_OUT047P	001
OUTM_50	B12	XPT_OUT047N	001
OUTP_51	A11	XPT_OUT055P	001
OUTM_51	A10	XPT_OUT055N	001
OUTP_52	AN11	XPT_OUT034P	001
OUTM_52	AN12	XPT_OUT034N	001
OUTP_53	AP12	XPT_OUT033P	001
OUTM_53	AP13	XPT_OUT033N	001
OUTP_54	AN8	XPT_OUT036P	001
OUTM_54	AN9	XPT_OUT036N	001
OUTP_55	AP9	XPT_OUT035P	001
OUTM_55	AP10	XPT_OUT035N	001
OUTP_56	E14	XPT_OUT058P	001
OUTM_56	E15	XPT_OUT058N	001
OUTP_57	D13	XPT_OUT044P	001
OUTM_57	D14	XPT_OUT044N	001
OUTP_58	G14	XPT_OUT046P	001
OUTM_58	G15	XPT_OUT046N	001
OUTP_59	D10	XPT_OUT054P	001
OUTM_59	D11	XPT_OUT054N	001

IC1001 (8/14) M21145G-11

OUTP_60	AK14	XPT_OUT025P	001
OUTM_60	AK15	XPT_OUT025N	001
OUTP_61	AL12	XPT_OUT026P	001
OUTM_61	AL13	XPT_OUT026N	001
OUTP_62	AH14	XPT_OUT022P	001
OUTM_62	AH15	XPT_OUT022N	001
OUTP_63	AL9	XPT_OUT028P	001
OUTM_63	AL10	XPT_OUT028N	001
OUTP_64	B8	XPT_OUT045P	001
OUTM_64	B9	XPT_OUT045N	001
OUTP_65	A8	XPT_OUT053P	001
OUTM_65	A7	XPT_OUT053N	001
OUTP_66	B5	XPT_OUT043P	001
OUTM_66	B6	XPT_OUT043N	001
OUTP_67	A5	XPT_OUT051P	001
OUTM_67	A4	XPT_OUT051N	001
OUTP_68	AN5	XPT_OUT038P	001
OUTM_68	AN6	XPT_OUT038N	001
OUTP_69	AP6	XPT_OUT037P	001
OUTM_69	AP7	XPT_OUT037N	001
OUTP_70	AN2	XPT_OUT040P	001
OUTM_70	AN3	XPT_OUT040N	001
OUTP_71	AP3	XPT_OUT039P	001
OUTM_71	AP4	XPT_OUT039N	001
OUTP_72	E11	XPT_OUT056P	001
OUTM_72	E12	XPT_OUT056N	001
OUTP_73	E8	XPT_OUT052P	001
OUTM_73	E9	XPT_OUT052N	001
OUTP_74	G11	XPT_OUT042P	001
OUTM_74	G12	XPT_OUT042N	001
OUTP_75	D7	XPT_OUT041P	001
OUTM_75	D8	XPT_OUT041N	001
OUTP_76	AK11	XPT_OUT027P	001
OUTM_76	AK12	XPT_OUT027N	001
OUTP_77	AK8	XPT_OUT029P	001
OUTM_77	AK9	XPT_OUT029N	001
OUTP_78	AH11	XPT_OUT023P	001
OUTM_78	AH12	XPT_OUT023N	001
OUTP_79	AL6	XPT_OUT030P	001
OUTM_79	AL7	XPT_OUT030N	001

XPT-32 (12/13)
BOARD NO. 1-879-571-13
MVS-8000X_XPT-32_013_12

4-362

XPT-32 (13/13)

SUFFIX: -13

XPT-32 (13/13)

SUFFIX: -13

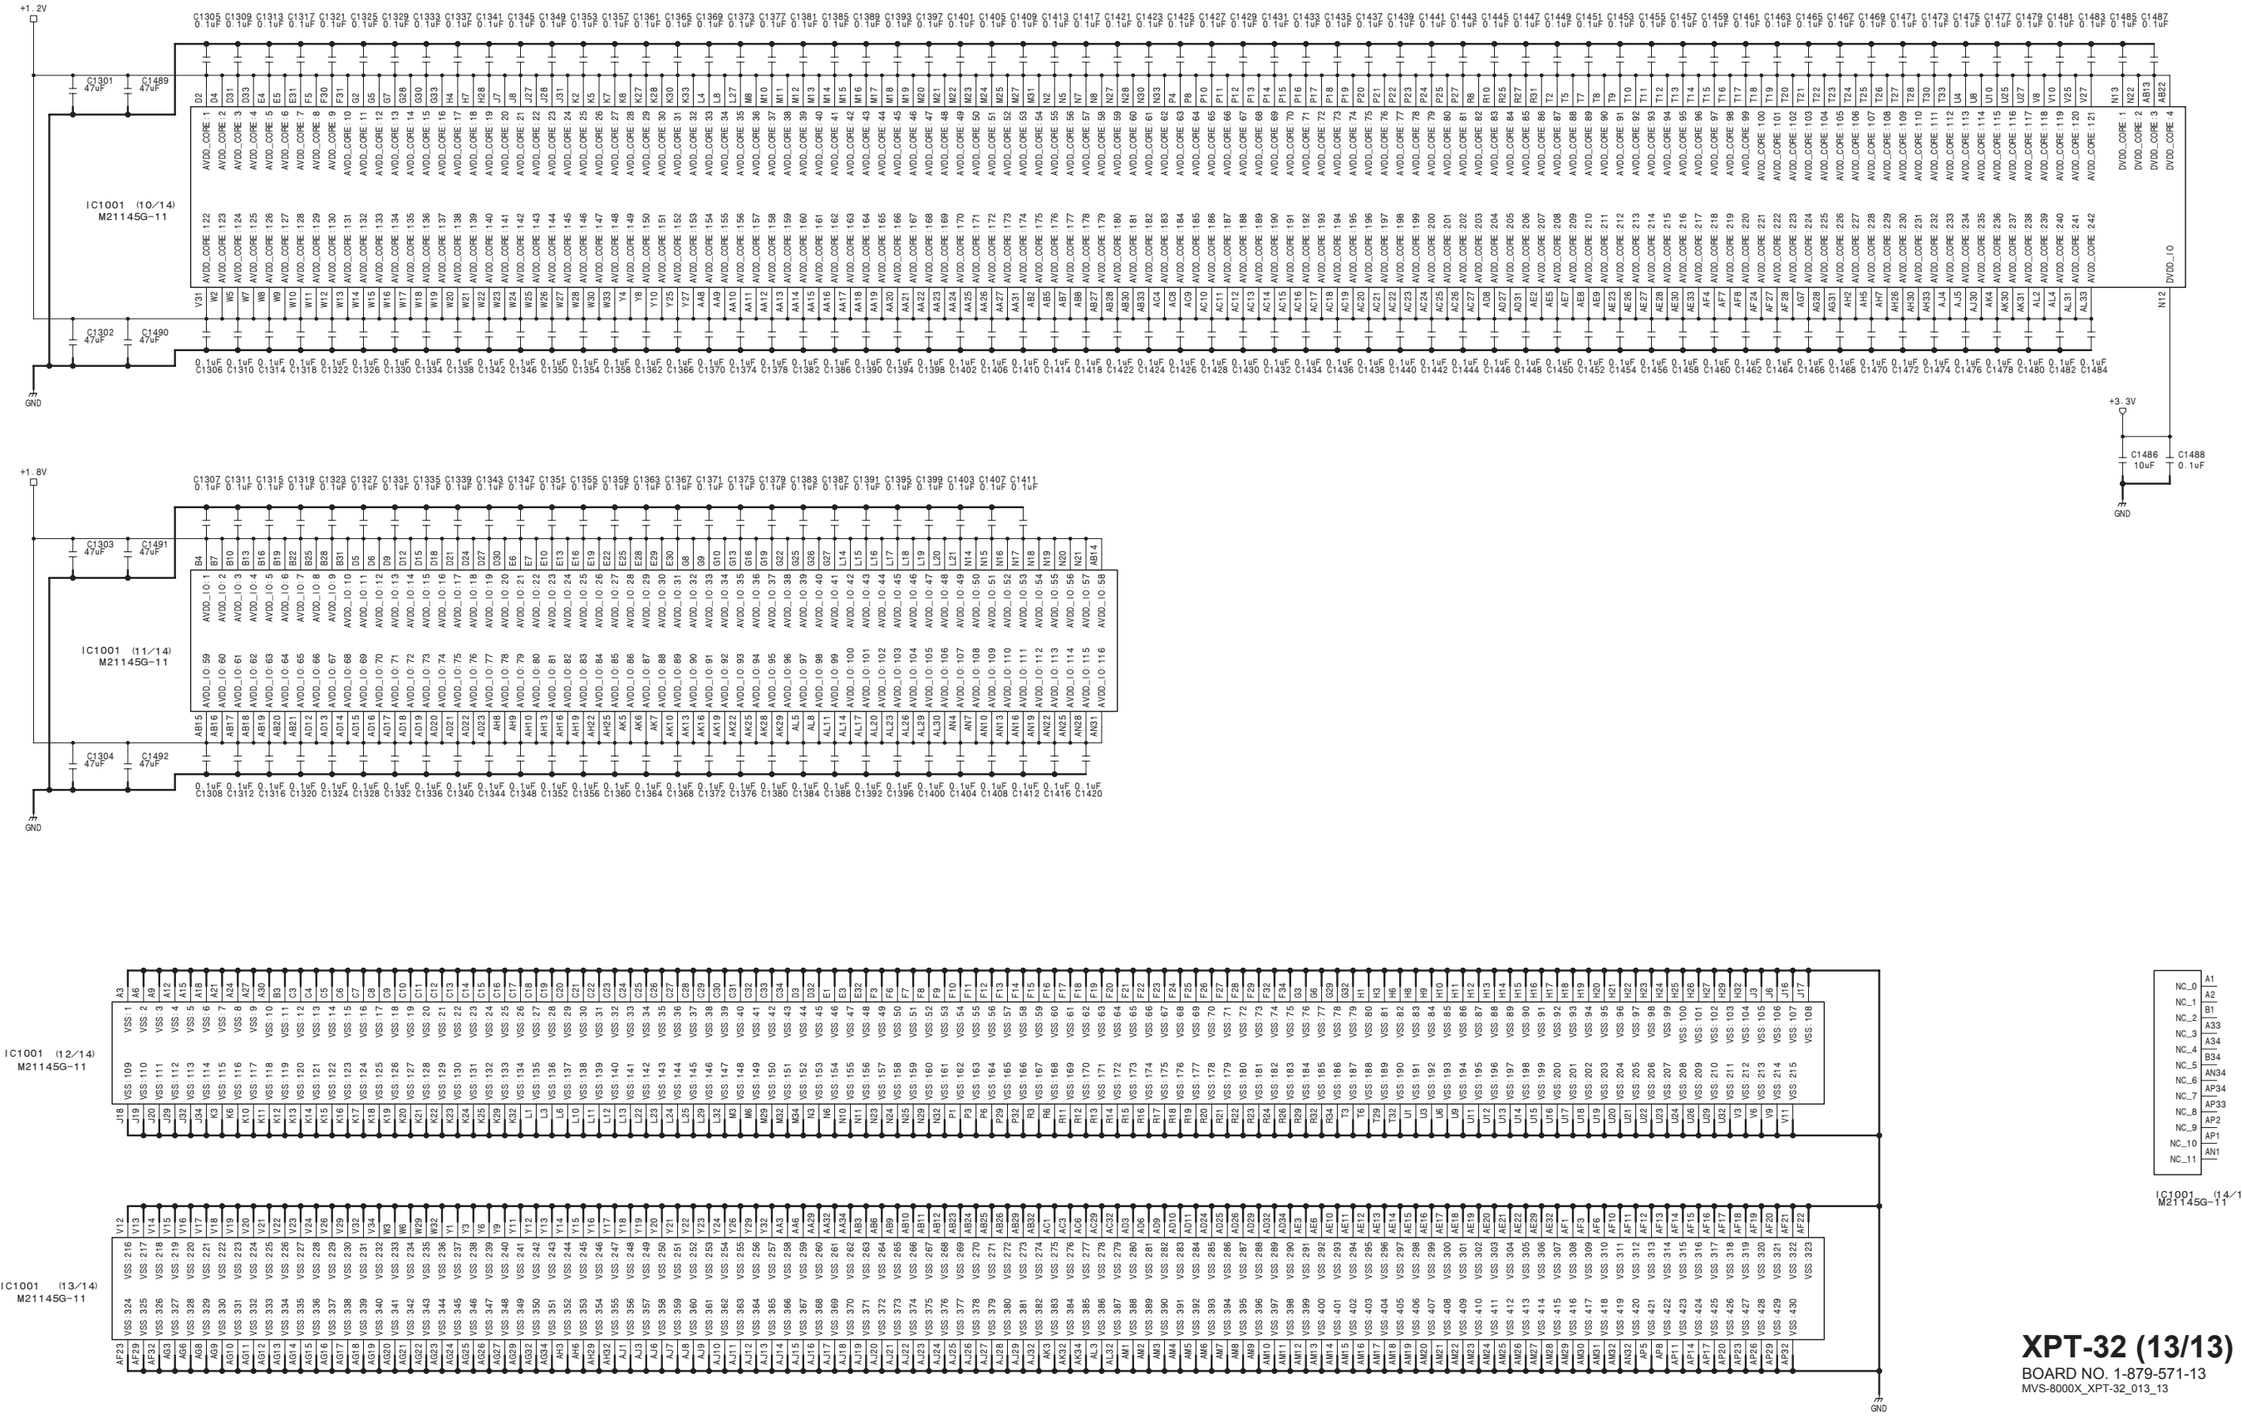

XPT-32 (13/13)

BOARD NO. 1-879-571-13

MVS-8000X_XPT-32_013_13

CN-3235 (1/6)
SUFFIX: -11

CNM1

	A	B	BG	C	D	DG
1			GND			GND
2	AESOUT1P	GND (AESOUT1N)	GND			GND
3	AESOUT2P	GND (AESOUT2N)	GND			GND
4	AESOUT3P	GND (AESOUT3N)	GND			GND
5	AESOUT4P	GND (AESOUT4N)	GND			GND
6	AESOUT5P	GND (AESOUT5N)	GND			GND
7	AESOUT6P	GND (AESOUT6N)	GND			GND
8	AESOUT7P	GND (AESOUT7N)	GND			GND
9	AESOUT8P	GND (AESOUT8N)	GND			GND
10			GND			GND

AES / EBU Degital Audio is SINGLE SIGNAL
Mother Board pin is differential
Negative Pin is NOT USE

FM_GBE_TRX0P, 0N, 1P, 1N : SGMII signal

MDC, MDIO (FM_GBE_TRX2P, 2N) : Gigabit Ethernet PHY control signal

STATUS (FM_GBE_TRX_3P) : REAR board Gigabit Ethernet PHY Link / ACT status
RESET_MY (FM_GBE_TRX_3N) : REAR board RESET signal

CNF1

	A	B	BG	C	D	DG
1	FM_GBE_TRX0P	FM_GBE_TRX0N	GND	FM_GBE_TRX1P	FM_GBE_TRX1N	GND
2	MDC (FM_GBE_TRX2P)	MDIO (FM_GBE_TRX2N)	GND	STATUS (FM_GBE_TRX3P)	RESET_MY (FM_GBE_TRX3N)	GND
3			GND			GND
4	PWR_ENABLE (FM_MTAP)	PWR_CUT_INFO (FM_MTAN)	GND	(FM_MTBP)	(FM_MTBN)	GND
5			GND			GND
6	FM_USBP	FM_USBN	GND			GND
7			GND			GND
8			GND			GND
9			GND			GND
10			GND			GND

FM_MTAP & FM_MTAN 'PIN' is used
by USB Current Limitter Control signal

FM_MTBP & FM_MTBN is not use
Because, IEEE1394 not support

SLOT_ID7 - SLOT_ID0 is not used
DC_ENABLE is not used

CNB1

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	(SLOT_ID4)	(SLOT_ID5)	GND	(SLOT_ID6)	(SLOT_ID7)	GND
4	(SLOT_ID0)	(SLOT_ID1)	GND	(SLOT_ID2)	(SLOT_ID3)	GND
5	BD_EXT_F	GND (BD_EXT_R)	GND			GND
6	RESET	(DC_ENABLE)	GND		FUSE+12V	GND
7						
8	12V	12V	12V	12V	12V	12V
9	12V	12V	12V	12V	12V	12V
10	12V	12V	12V	12V	12V	12V

CN-3235 (1/6)
BOARD NO. 1-879-567-11
MVS-8000X_CN-3235_011_1

4-364

CN-3235 (2/6)

SUFFIX: -11

CN-3235 (2/6)

SUFFIX: -11

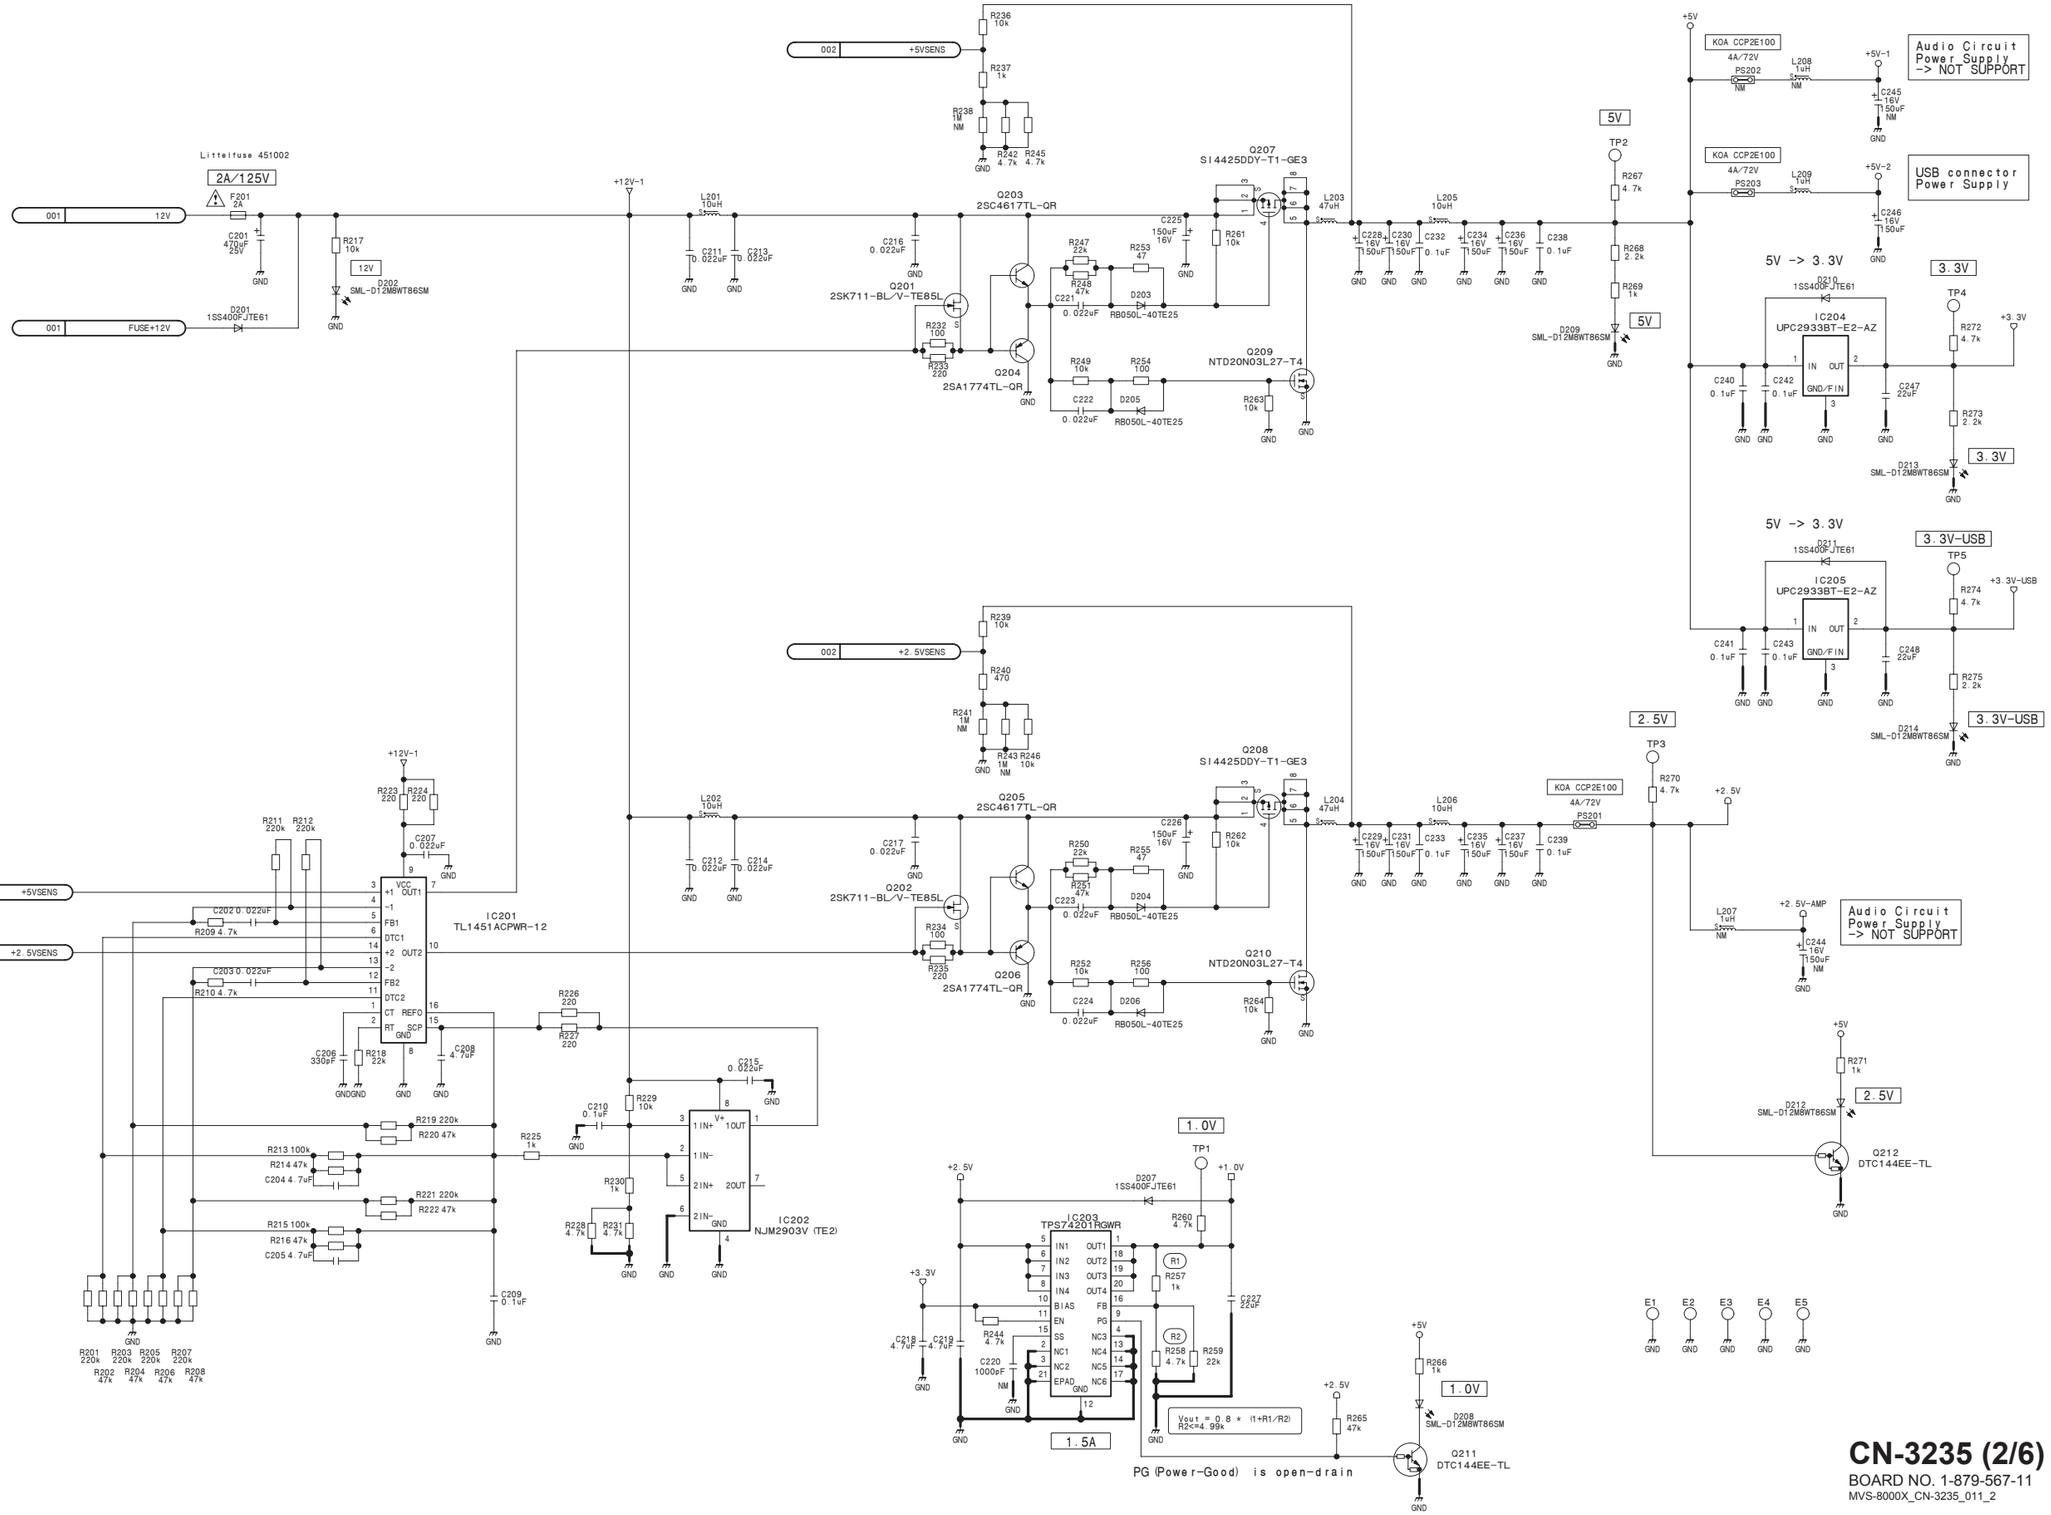

CN-3235 (2/6)

BOARD NO. 1-879-567-11

MVS-8000X_CN-3235_011_2

CN-3235 (3/6)
SUFFIX: -11

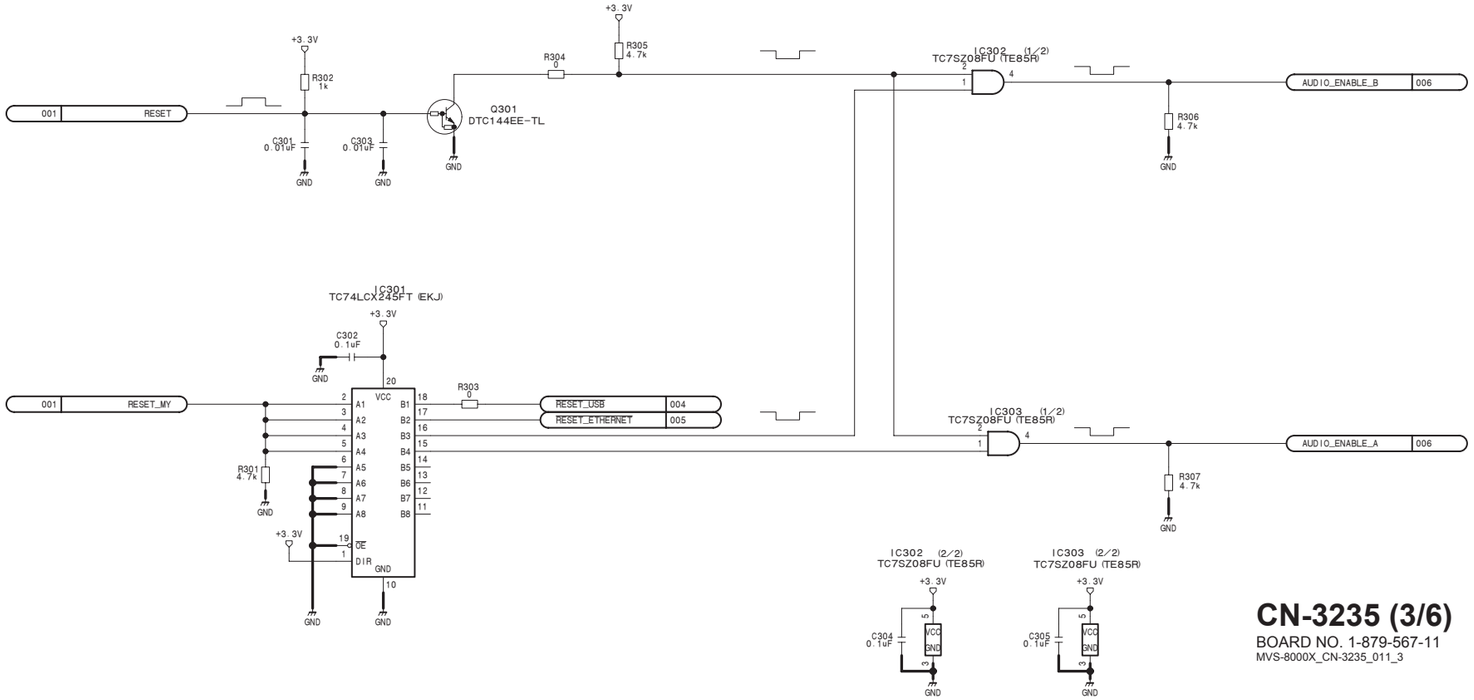

CN-3235 (3/6)
BOARD NO. 1-879-567-11
MVS-8000X_CN-3235_011_3

CN-3235 (4/6) **SUFFIX: -11**

TPS2044ADR is LPS standard

500mA Current Limitter

IC402 TPS2044ADR

IEEE1394 NOT SUPPORT
IEEE1394's pin is UNUSED.
so 1394's pin use USB connector 5V Power control
(5V current limit indicate & 5V Power ON/OFF)

001 PWR_ENABLE
001 PWR_CUT_INFO

Hi-Z (High) : Normal
Low : Current Limit

Pull-Up register is FRONT Board

Q402 DTC144EE-TL

Front Board exist : GND

001 BD_EXT_F

Q401 DTC144EE-TL

RESET_USB 003

IC401 UPD720114GA-9EU-A

RED PORT 2 ABNORMAL
GREEN PORT 2 ACTIVE
RED PORT 1 ABNORMAL
GREEN PORT 1 ACTIVE

D401 SML-D12U8WT86
D402 SML-D12M8WT86SM
D403 SML-D12U8WT86
D404 SML-D12M8WT86SM

X401 30MHz

FB401
FB402

Differential 100 ohm Impedance control

001 FM_USBN
001 FM_USBP

USB Hub Through path

CN401 USB1 standard A type
CN402 USB2 standard A type

FB403 FB404 FB405 FB406
220 ohm +/-25% at 100MHz current : 2000mA

L401 L402 0uH
90 ohm +/-20% at 100MHz
Direct current resistance : 1.5 ohm +/-25%

ESD Protection
IC403 SN75240PWR NM
IC404 SN75240PWR NM

USB connector
Audio Circuit Enable signal
Ethernet PHY RESET signal

CN-3235 (4/6)
BOARD NO. 1-879-567-11
MVS-8000X_CN-3235_011_4

CN-3235 (5/6)
SUFFIX: -11

001 FM_GBE_TRX0P
001 FM_GBE_TRX0N
001 FM_GBE_TRX1P
001 FM_GBE_TRX1N

Gigabit Ethernt's pin "CHANGE" SGMII pin

+2.5V +2.5V +2.5V +1.0V +2.5V +2.5V

C501 0.1uF C502 0.1uF C503 0.1uF C504 0.1uF C505 0.1uF C506 22uF C507 0.1uF C508 0.1uF C509 22uF C510 0.1uF C511 0.1uF C512 0.1uF C513 0.1uF C514 22uF C515 0.1uF C516 0.1uF C517 22uF C518 0.1uF

FB501 FB502

GND

VDDO3 VDDO2 VDDO1 VDDOX2 VDDOX1 VDDOH3 VDDOH2 VDDOH1 DVDD8 DVDD7 DVDD6 DVDD5 DVDD4 DVDD3 DVDD2 DVDD1 AVDD6 AVDD5 AVDD4 AVDD3 AVDD2 AVDD1

Differential 100 ohm Impedance control

S_CLK+/SD+ S_CLK-/SD- S_IN+ S_IN- S_OUT+ S_OUT-

SGMII1_TXP SGMII1_TXN SGMII1_RXP SGMII1_RXN

GTX_CLK/TBI_TXCLK/TXC
TX_CLK/RCLK1
TX_EN/TXD8/TX_CTL/TD4_TD9
TX_ER/TXD9

R504 4.7k

TXD0/TD0 TXD1/TD1 TXD2/TD2 TXD3/TD3 TXD4 TXD5 TXD6 TXD7

IC501
88E1111-B2-BAB1

FM DATA LAN's PHY

RX_CLK/RCLK0/RXC
RX_DV/RXD8/RX_CTL/RD4_RD9
RX_ER/RXD9

RXD0/RD0 RXD1/RD1 RXD2/RD2 RXD3/RD3 RXD4 RXD5 RXD6 RXD7

CRS/COMMA
COL/LPBK

MDI0+ MDI0- MDI1+ MDI1- MDI2+ MDI2- MDI3+ MDI3-

+2.5V

C521 0.01uF R527 47 R528 47
C522 0.01uF R529 47 R530 47
C523 0.01uF R531 47 R532 47
C524 0.01uF R533 47 R534 47

C525 1000pF C529 0.1uF C533 0.01uF
C526 1000pF C530 0.1uF C534 0.01uF
C527 1000pF C531 0.1uF C535 0.01uF
C528 1000pF C532 0.1uF C536 0.01uF

GND

CN501

+5V +5V

R540 4.7k R541 4.7k

TRP1+ 1
TRP1- 2
TRP2+ 3
TRP2- 6
TRP3+ 4
TRP3- 5
TRP4+ 7
TRP4- 8

SHIELD

FM DATA LAN

LED_LINK10 LED_LINK100 LED_LINK1000 LED_DUPLEX LED_RX LED_TX HSDAC+ HSDAC-

D501 SML-D12M8WT86SM
D502 SML-D12M8WT86SM
D503 SML-D12M8WT86SM

R509 R510 R511 R512 R513 R514 R515 47 R516 47

R535 220 R536 220 R537 220 R538 220 R539 220

100
1000
EXT LINK/ACT

CONFIG0 CONFIG1 CONFIG2 CONFIG3 CONFIG4 CONFIG5 CONFIG6

R517 R518 R519 R520 R521 R522 R523

CONFIG[6:0] is Device Configuration
CONFIG[6:0] pins are latched at the de-assertion of the RESETn pin

PHYADR[4:0] = 00001
ENA_PAUSE = 1

ANEG[3:0] = 1110
(Auto-Nego. 10/100/1000BASE Master)

HWCFG_MODE[3:0] = 0100
(SGMII without Clock with SGMII Auto-Neg)

DIS_FC = 1
(Disable fiber/copper auto selection)

DIS_SLEEP = 1
SEL_TWSI = 0 (MDC/MDIO mode)
INT_POL = 0 (INTn signal is active High)

75/50 OHM = 0
(50 ohm termination SGMII IN/OUT)

SEL_FREQ CL501 0.8

IC504 (2/3) TC7WH125FK (TE85R)
IC502 (1/2) TC7SZ08FU (TE85R)
IC503 (1/2) TC7SZ08FU (TE85R)
IC504 (1/3) TC7WH125FK (TE85R)

Go to FRONT board

STATUS 001

Gigabit Ethernet PHY Link / ACT Status

MDIO/SDA output High = 2.3V (Max)
CADEC (Spartan-3AN) 's LVCMOS33 buffer, input High > 2.0V

connect CADEC

001 MDC
001 MDIO
003 RESET_ETHERNET

RESET signal is low active

MDC/SCL MDIO/SDA INTn RESETn COMA

R502 4.7k R501 4.7k NM R503 4.7k

PHY address = 0x01 (00001)
The MDIO pin requires a pull-up resistor in a range from 1.5kohm to 10kohm

TCK TDI TDO TMS TRSTn XTAL1 XTAL2 125CLK NC1 NC2 VSSC RSET

R505 4.7k R506 4.7k R507 4.7k

X501 25MHz

R525 1M

C519 22pF C520 22pF

R508 220R R524 4.7k R526 4.7k

VSS1 VSS2 VSS3 VSS4 VSS5 VSS6 VSS7 VSS8 VSS9 VSS10 VSS11 VSS12 VSS13 VSS14 VSS15 VSS16 VSS17 VSS18 VSS19 VSS20 VSS21 VSS22 VSS23

IC502 (2/2) TC7SZ08FU (TE85R)
IC503 (2/2) TC7SZ08FU (TE85R)
IC504 (3/3) TC7WH125FK (TE85R)

C537 0.1uF C538 0.1uF C539 0.1uF

FM DATA LAN
(External Ethernet)

CN-3235 (5/6)
BOARD NO. 1-879-567-11
MVS-8000X_CN-3235_011_5

CN-3235 (6/6)

SUFFIX: -11

CN-3235 (6/6)
SUFFIX: -11

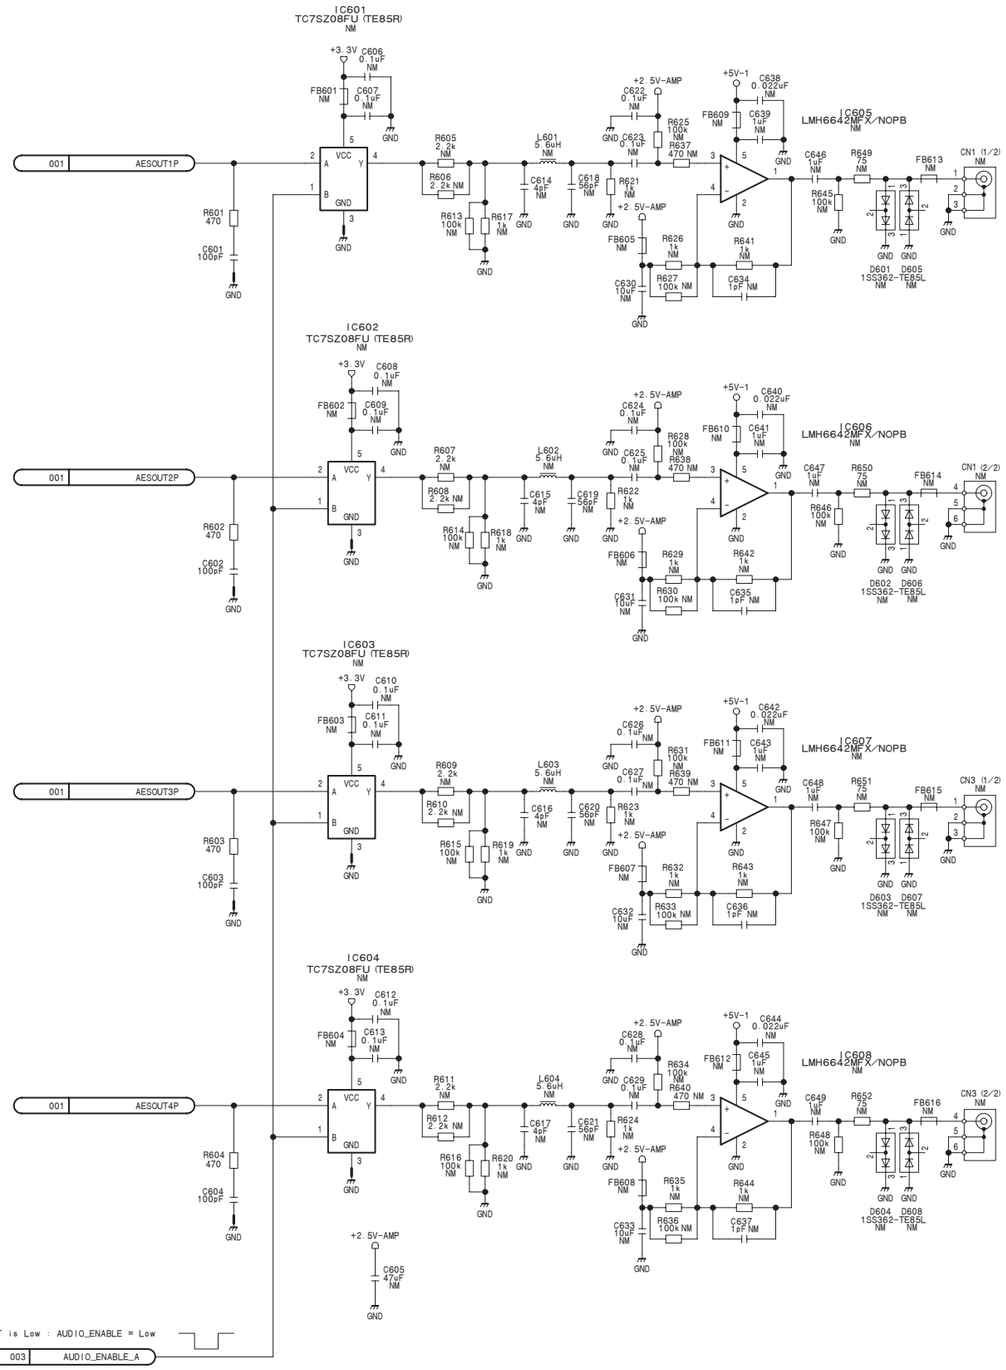

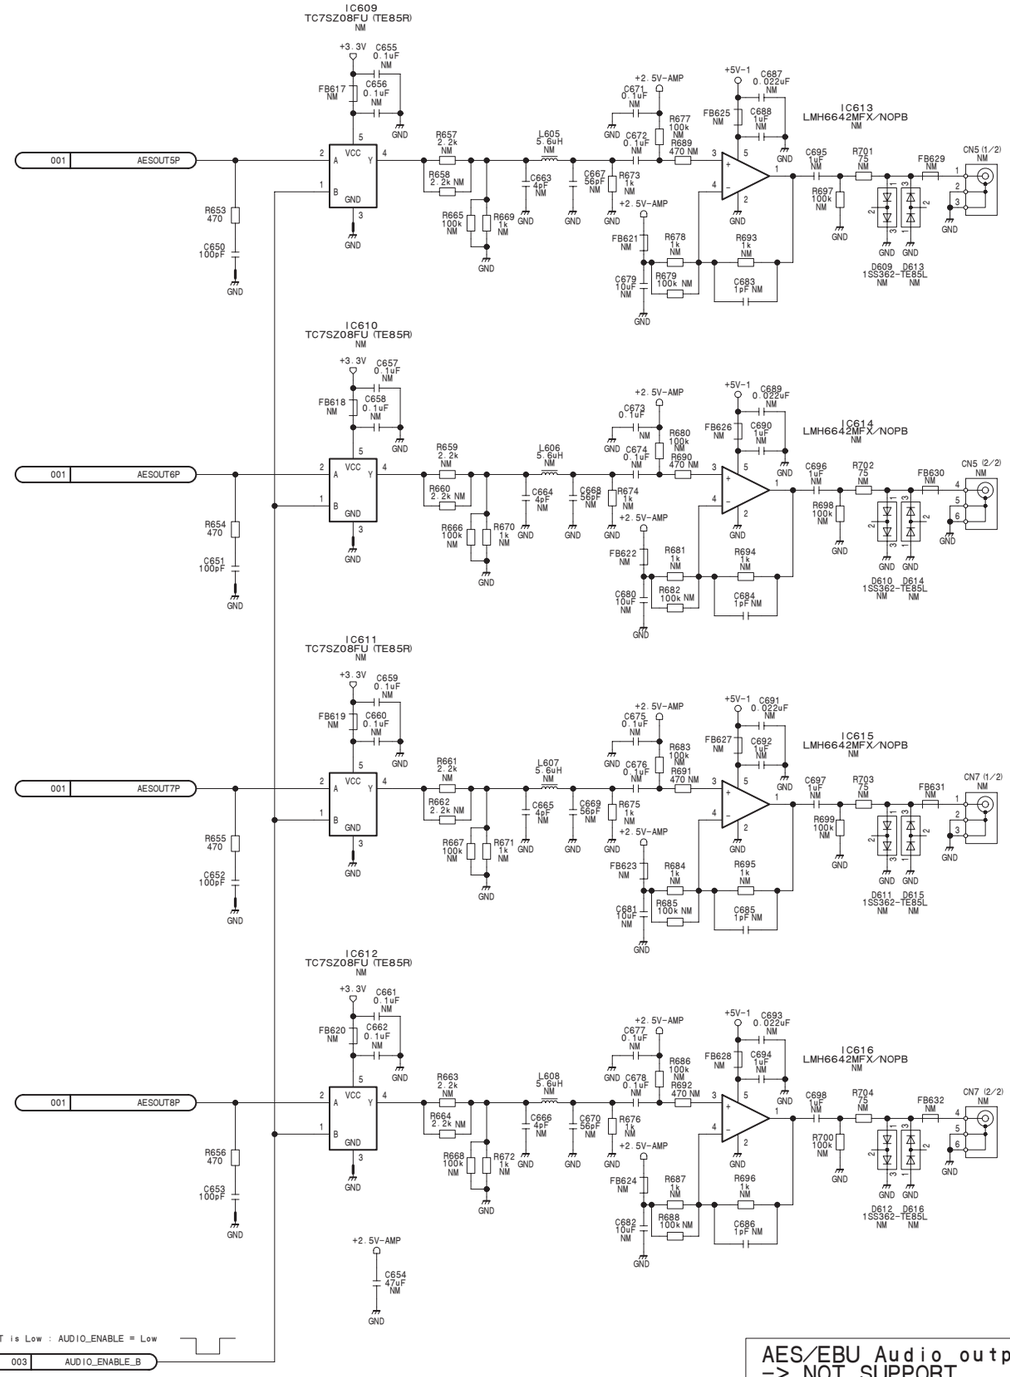

AES/EBU Audio output
-> NOT SUPPORT

CN-3235 (6/6)

BOARD NO. 1-879-567-11

MVS-8000X_CN-3235_011_6

DVP-53 (1/54)
SUFFIX: -11

Leftmost

(MB : CNA)

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET_SWER	DC_ENBL	GND		FUSE+12V	GND
6	GND (BD_EXT_SLF)	(BD_EXT_SLR)	GND			GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9	RESET_DME		GND	CN_SCL	CN_SDA	GND
10	MVE_ID0	MVE_ID1	GND	MVE_ID2	MVE_ID3	GND

CNJ1

	A	B	BG	C	D	DG
1	MVEO_4KP	MVEO_4KN	GND	MVEI_4KP	MVEI_4KN	GND
2	MVEO_2KP	MVEO_2KN	GND	MVEI_2KP	MVEI_2KN	GND
3			GND			GND
4	MVEO_4VP	MVEO_4VN	GND	MVEI_4VP	MVEI_4VN	GND
5	MVEO_2VP	MVEO_2VN	GND	MVEI_2VP	MVEI_2VN	GND
6	MVEO_3KP	MVEO_3KN	GND	MVEI_3KP	MVEI_3KN	GND
7	MVEO_1KP	MVEO_1KN	GND	MVEI_1KP	MVEI_1KN	GND
8			GND			GND
9	MVEO_3VP	MVEO_3VN	GND	MVEI_3VP	MVEI_3VN	GND
10	MVEO_1VP	MVEO_1VN	GND	MVEI_1VP	MVEI_1VN	GND

(MB : CNB)

CNC1

	A	B	BG	C	D	DG
1	VCLKP	VCLKN	GND			GND
2	FDP	FDN	GND	VDP	VDN	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET_SWER_TRX0P	INET_SWER_TRX0N	GND	INET_SWER_TRX1P	INET_SWER_TRX1N	GND
7	INET_SWER_TRX2P	INET_SWER_TRX2N	GND	INET_SWER_TRX3P	INET_SWER_TRX3N	GND
8	INET_DME_TRX0P	INET_DME_TRX0N	GND	INET_DME_TRX1P	INET_DME_TRX1N	GND
9	INET_DME_TRX2P	INET_DME_TRX2N	GND	INET_DME_TRX3P	INET_DME_TRX3N	GND
10			GND			GND

(MB : CNP)

CNK1

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3	EFVMO_LOCK	EFVMO_PRST	GND	EFVMI_LOCK	EFVMI_PRST	GND
4	EFVMO_0P	EFVMO_0N	GND	EFVMI_0P	EFVMI_0N	GND
5	EFVMO_1P	EFVMO_1N	GND	EFVMI_1P	EFVMI_1N	GND
6	EFVMO_2P	EFVMO_2N	GND	EFVMI_2P	EFVMI_2N	GND
7	EFVMO_3P	EFVMO_3N	GND	EFVMI_3P	EFVMI_3N	GND
8	EFVMO_4P	EFVMO_4N	GND	EFVMI_4P	EFVMI_4N	GND
9	EFVMO_5P	EFVMO_5N	GND	EFVMI_5P	EFVMI_5N	GND
10	EFVMO_6P	EFVMO_6N	GND	EFVMI_6P	EFVMI_6N	GND

CNE1

	A	B	BG	C	D	DG
1			GND			GND
2			GND	EXTIN_4VP	EXTIN_4VN	GND
3			GND			GND
4	MON_OUT4P	MON_OUT4N	GND	EXTIN_2VP	EXTIN_2VN	GND
5	MON_OUT2P	MON_OUT2N	GND			GND
6	MON_OUT3P	MON_OUT3N	GND			GND
7	MON_OUT1P	MON_OUT1N	GND			GND
8			GND	EXTIN_3VP	EXTIN_3VN	GND
9			GND			GND
10			GND	EXTIN_1VP	EXTIN_1VN	GND

CNP1

	A	B	BG	C	D	DG
1	EFVMO_CLKP	EFVMO_CLKN	GND	EFVMI_CLKP	EFVMI_CLKN	GND
2	EFVMO_7P	EFVMO_7N	GND	EFVMI_7P	EFVMI_7N	GND
3	EFVMO_8P	EFVMO_8N	GND	EFVMI_8P	EFVMI_8N	GND
4	EFVMO_9P	EFVMO_9N	GND	EFVMI_9P	EFVMI_9N	GND
5	EFVMO_10P	EFVMO_10N	GND	EFVMI_10P	EFVMI_10N	GND
6	EFVMO_11P	EFVMO_11N	GND	EFVMI_11P	EFVMI_11N	GND
7	EFVMO_12P	EFVMO_12N	GND	EFVMI_12P	EFVMI_12N	GND
8			GND			GND
9			GND			GND
10			GND			GND

Rightmost

DVP-53 (1/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_1

DVP-53 (2/54)

SUFFIX: -11

DVP-53 (2/54)

SUFFIX: -11

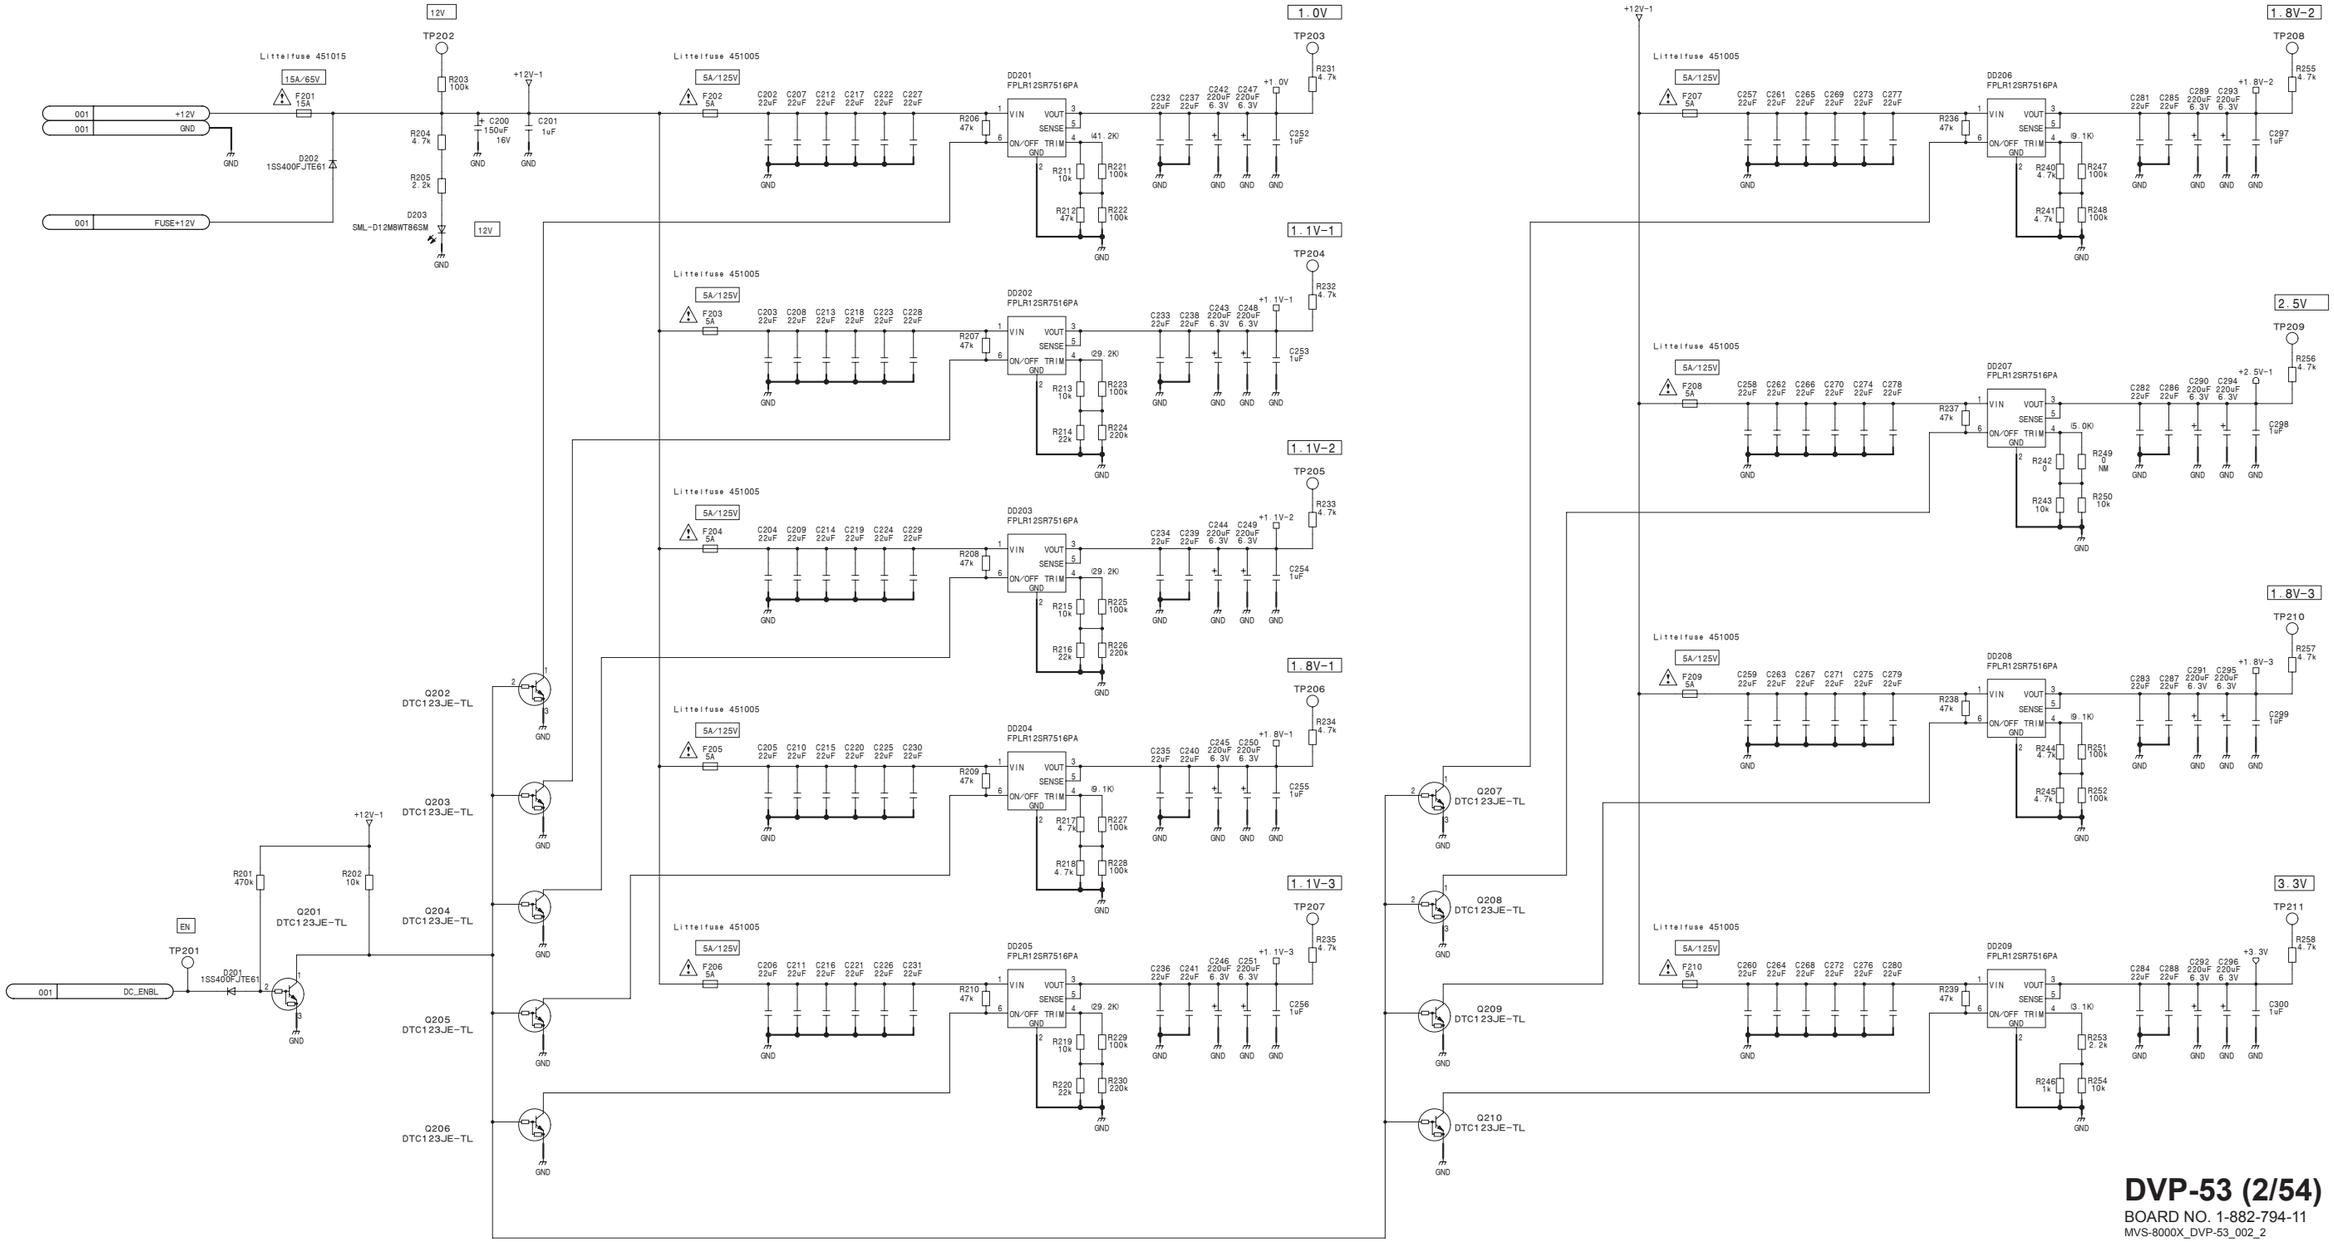

DVP-53 (2/54)

BOARD NO. 1-882-794-11

MVS-8000X_DVP-53_002_2

DVP-53 (3/54)
SUFFIX: -11

DVP-53 (3/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_3

4-372

DVP-53 (4/54)
SUFFIX: -11

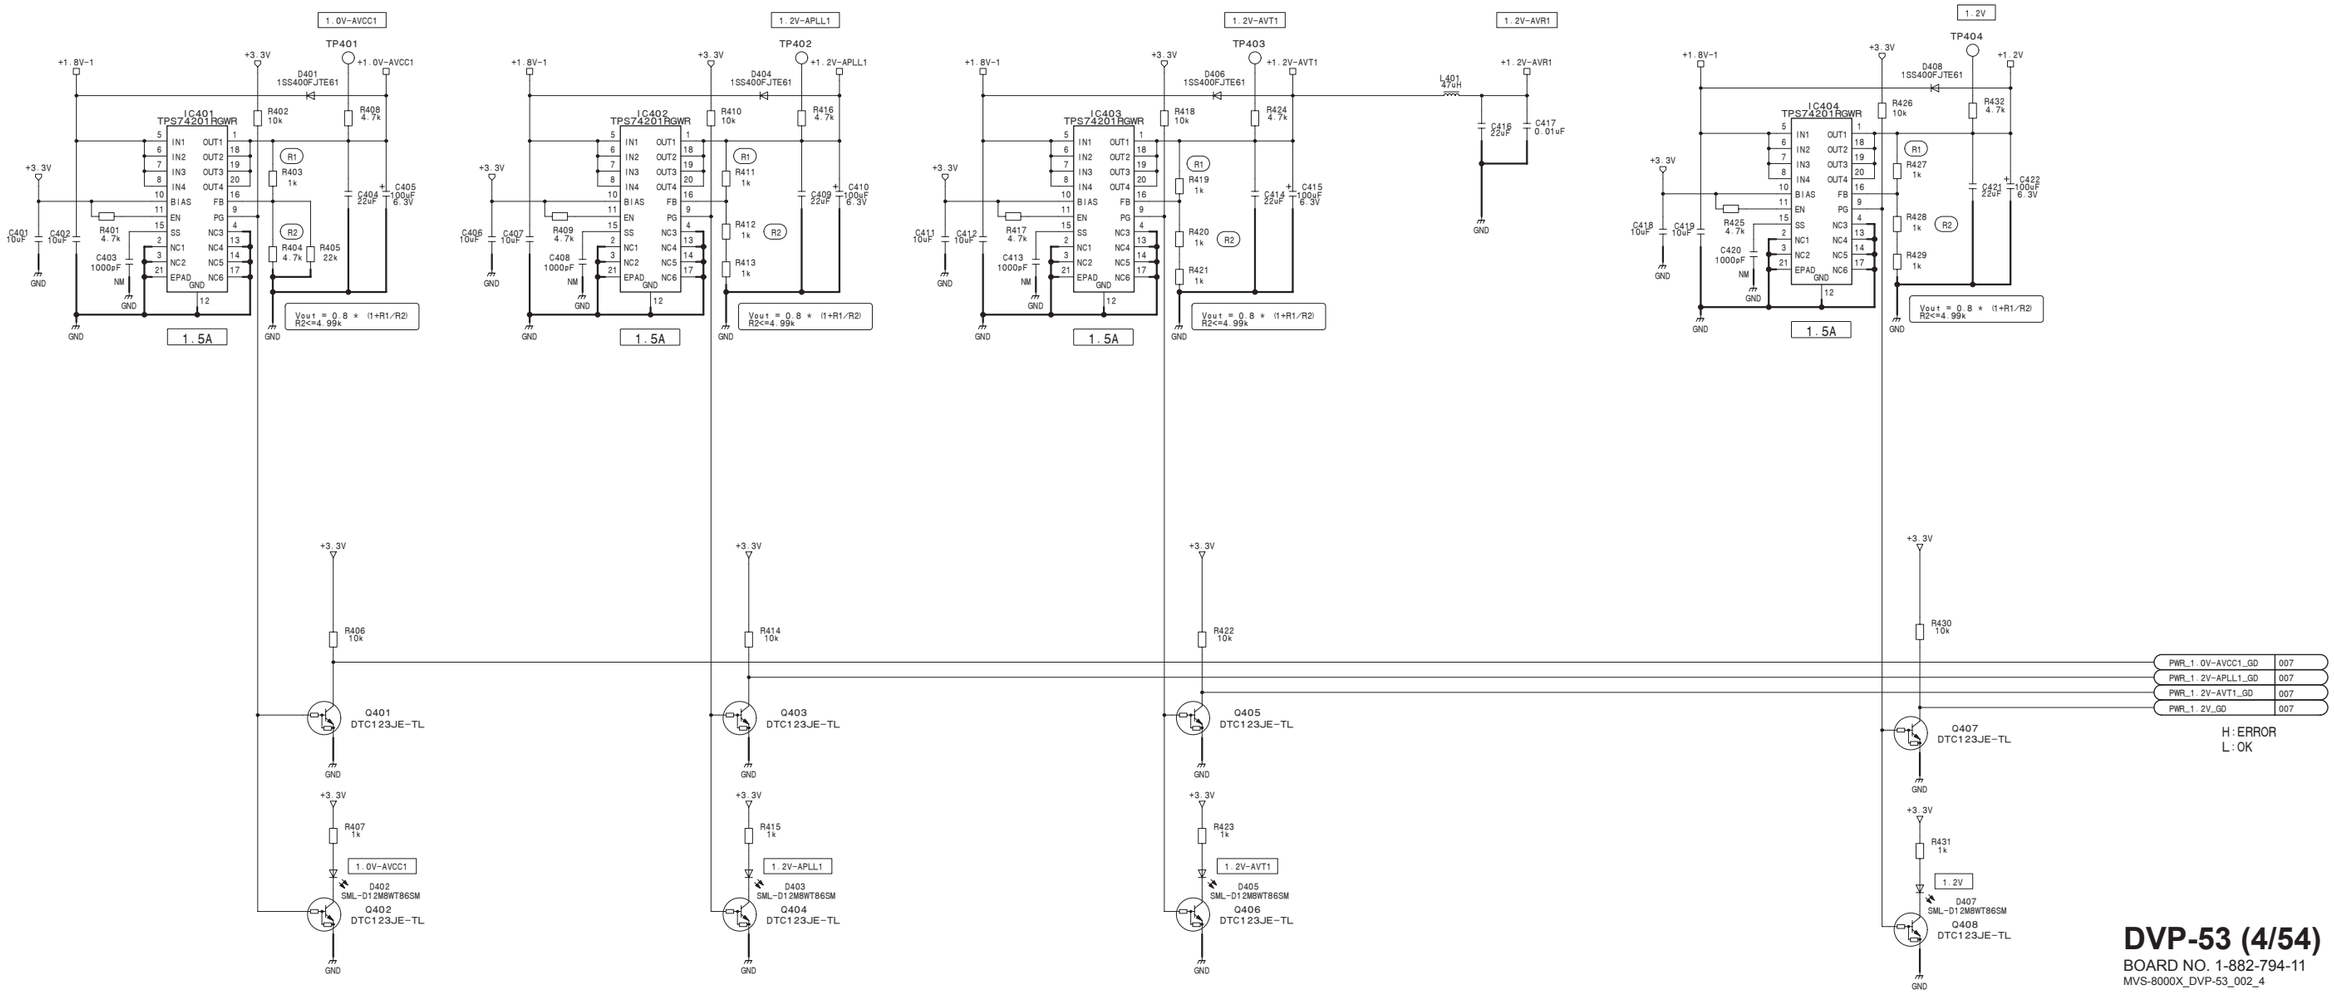

DVP-53 (4/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_4

DVP-53 (5/54) **SUFFIX: -11**

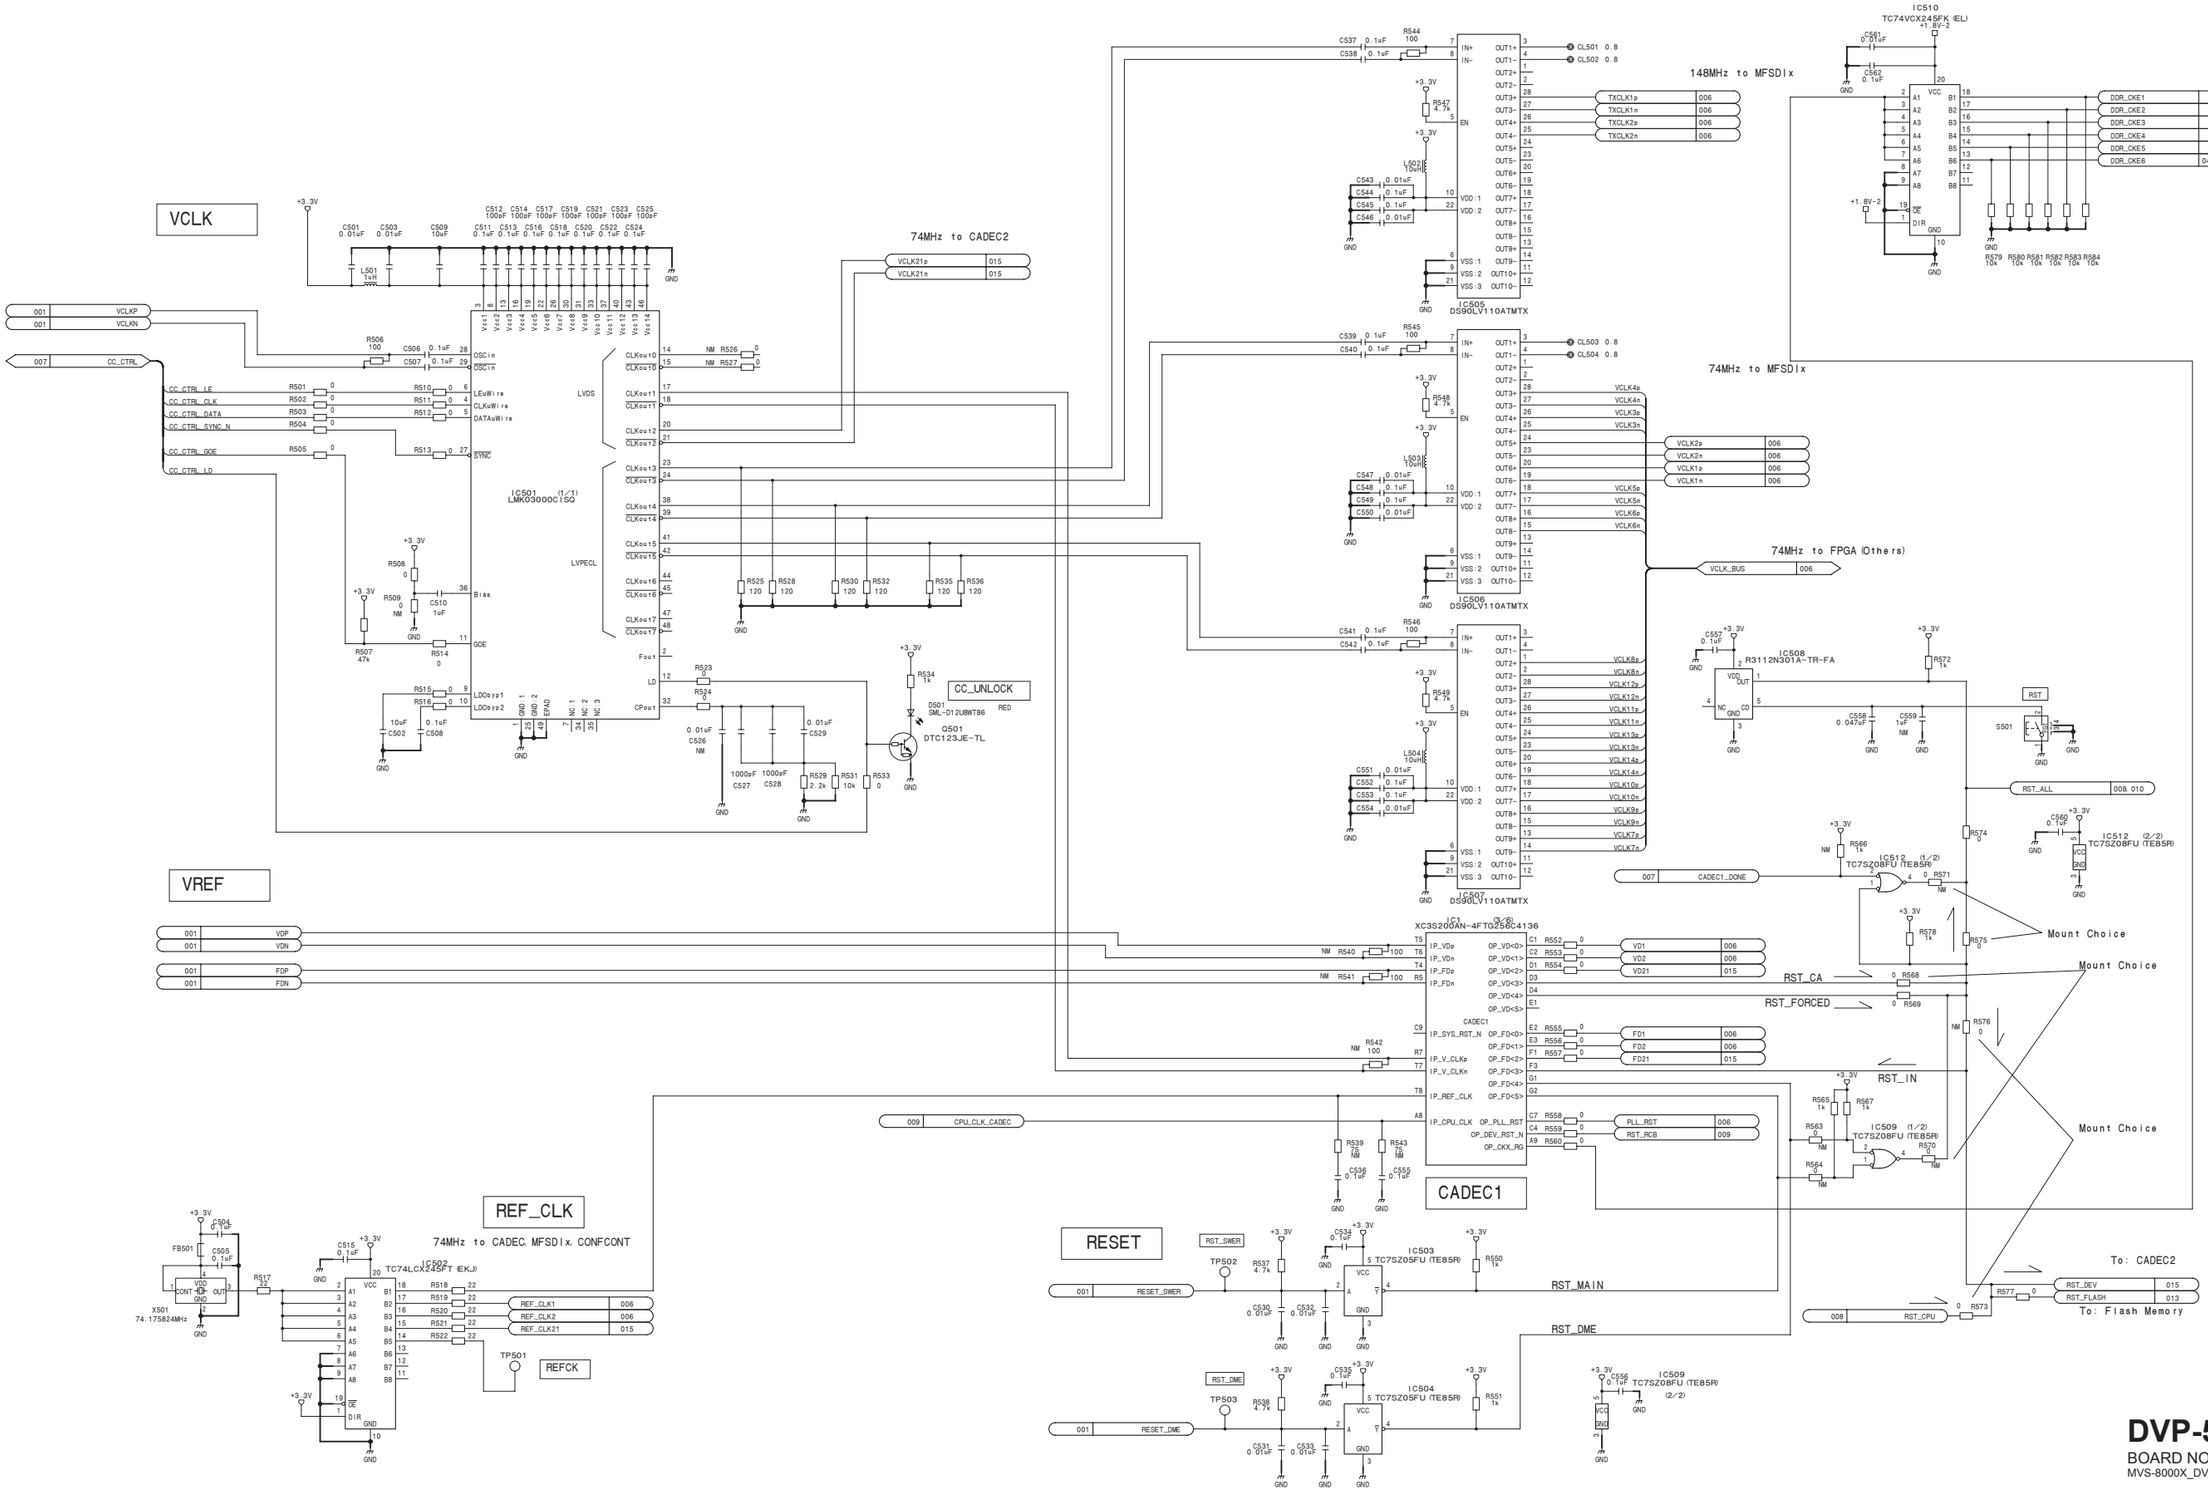

DVP-53 (5/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_5

DVP-53 (6/54)
SUFFIX: -11

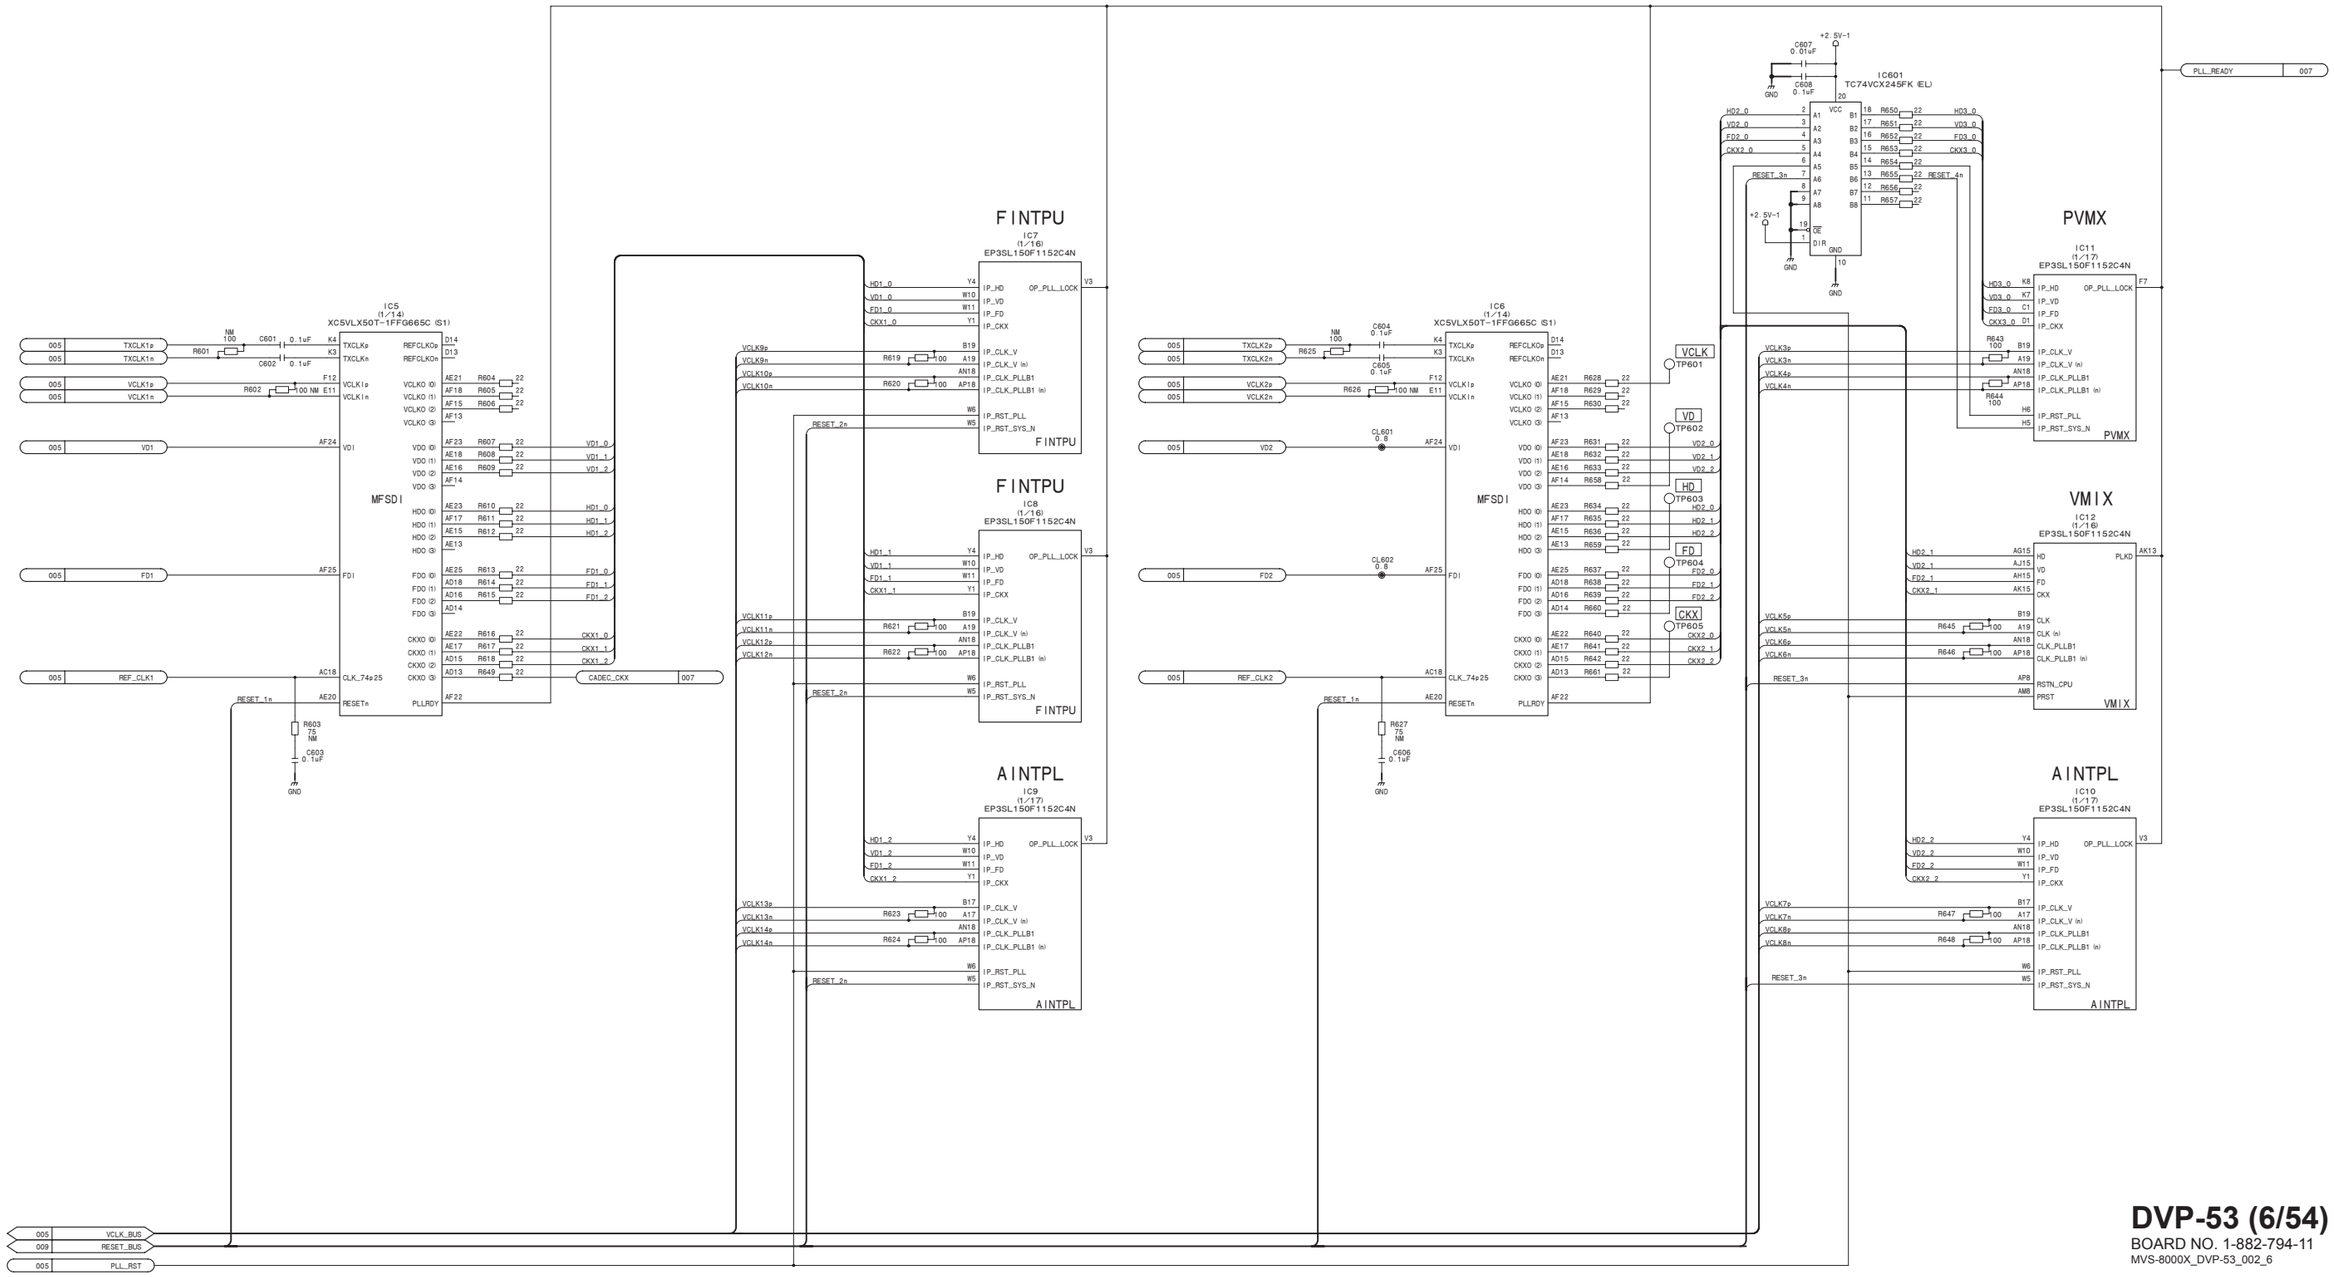

DVP-53 (6/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_6

DVP-53 (7/54)
SUFFIX: -11

CPU I/F

DEV CTL

SET UP

CADEC (VCC&GND)

CCAD [0] : ALL CONF DONE from CADEC2

DVP-53 (8/54)
SUFFIX: -11

DVP-53 (8/54)
SUFFIX: -11

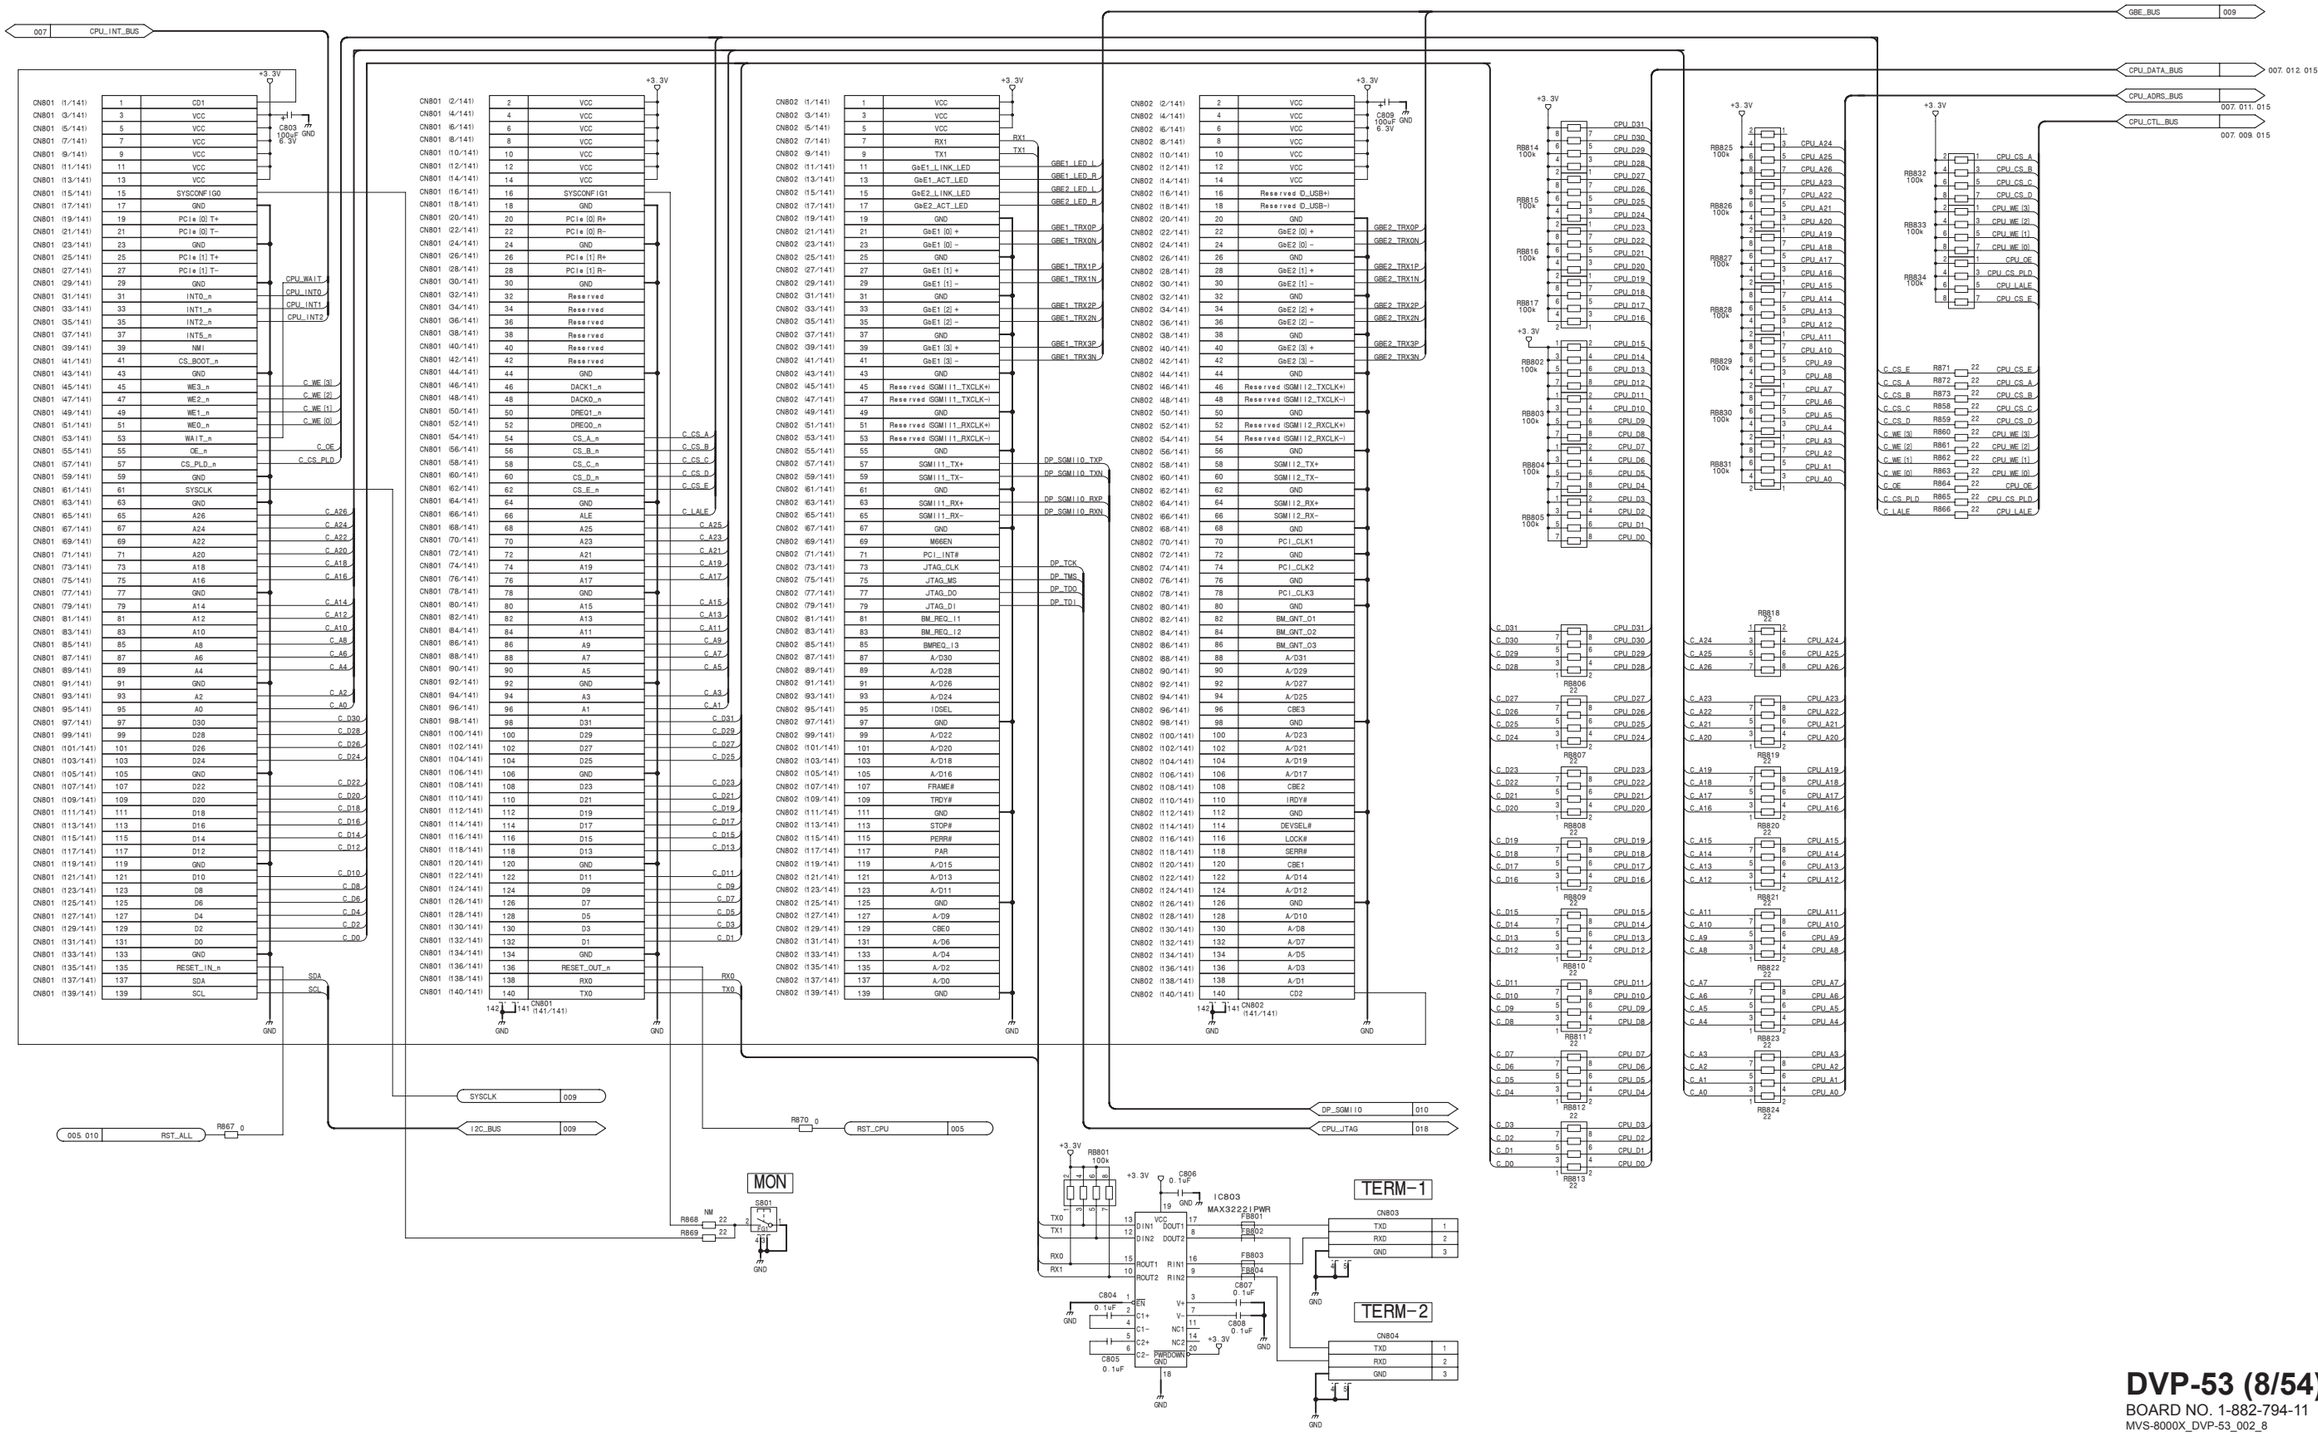

DVP-53 (8/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_8

DVP-53 (9/54) **SUFFIX: -11**

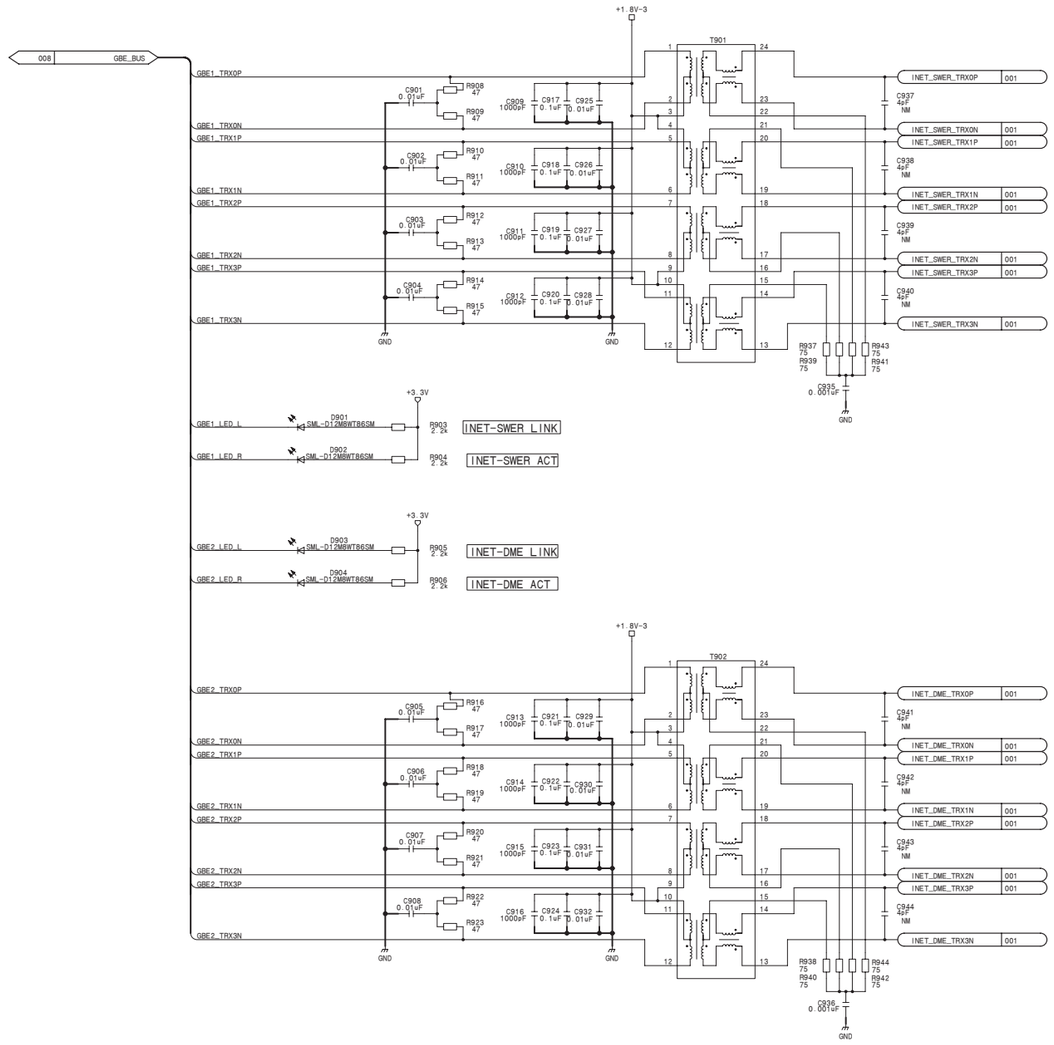

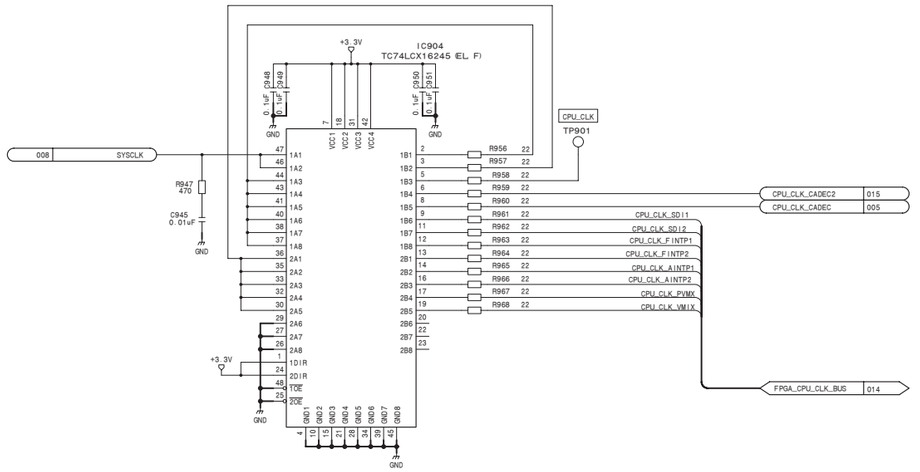

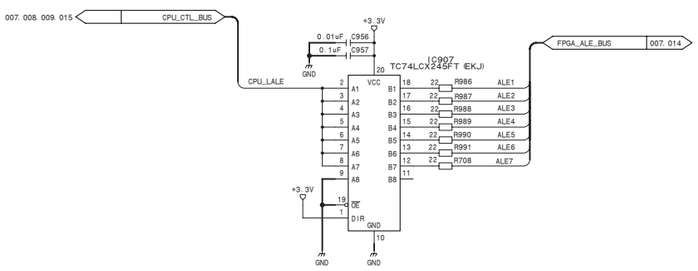

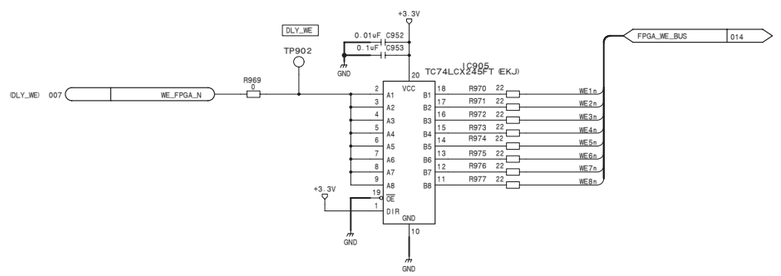

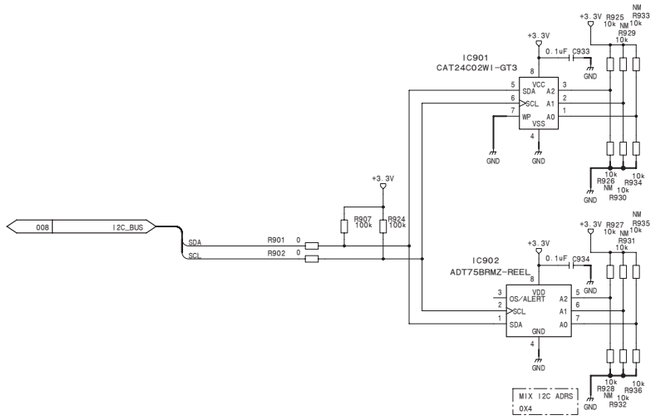

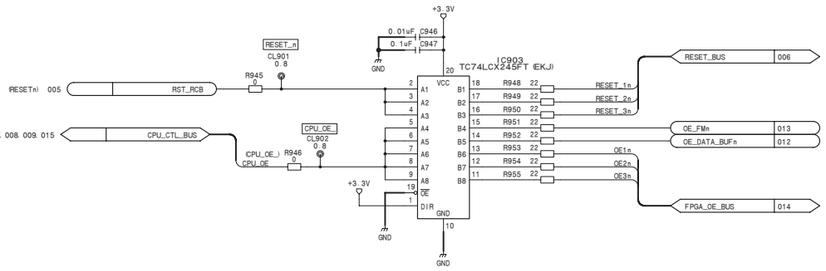

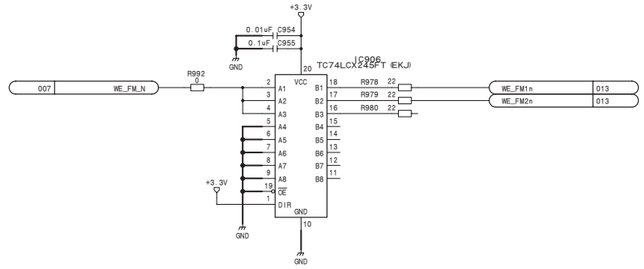

DVP-53 (9/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_9

008 DP_SGMII0

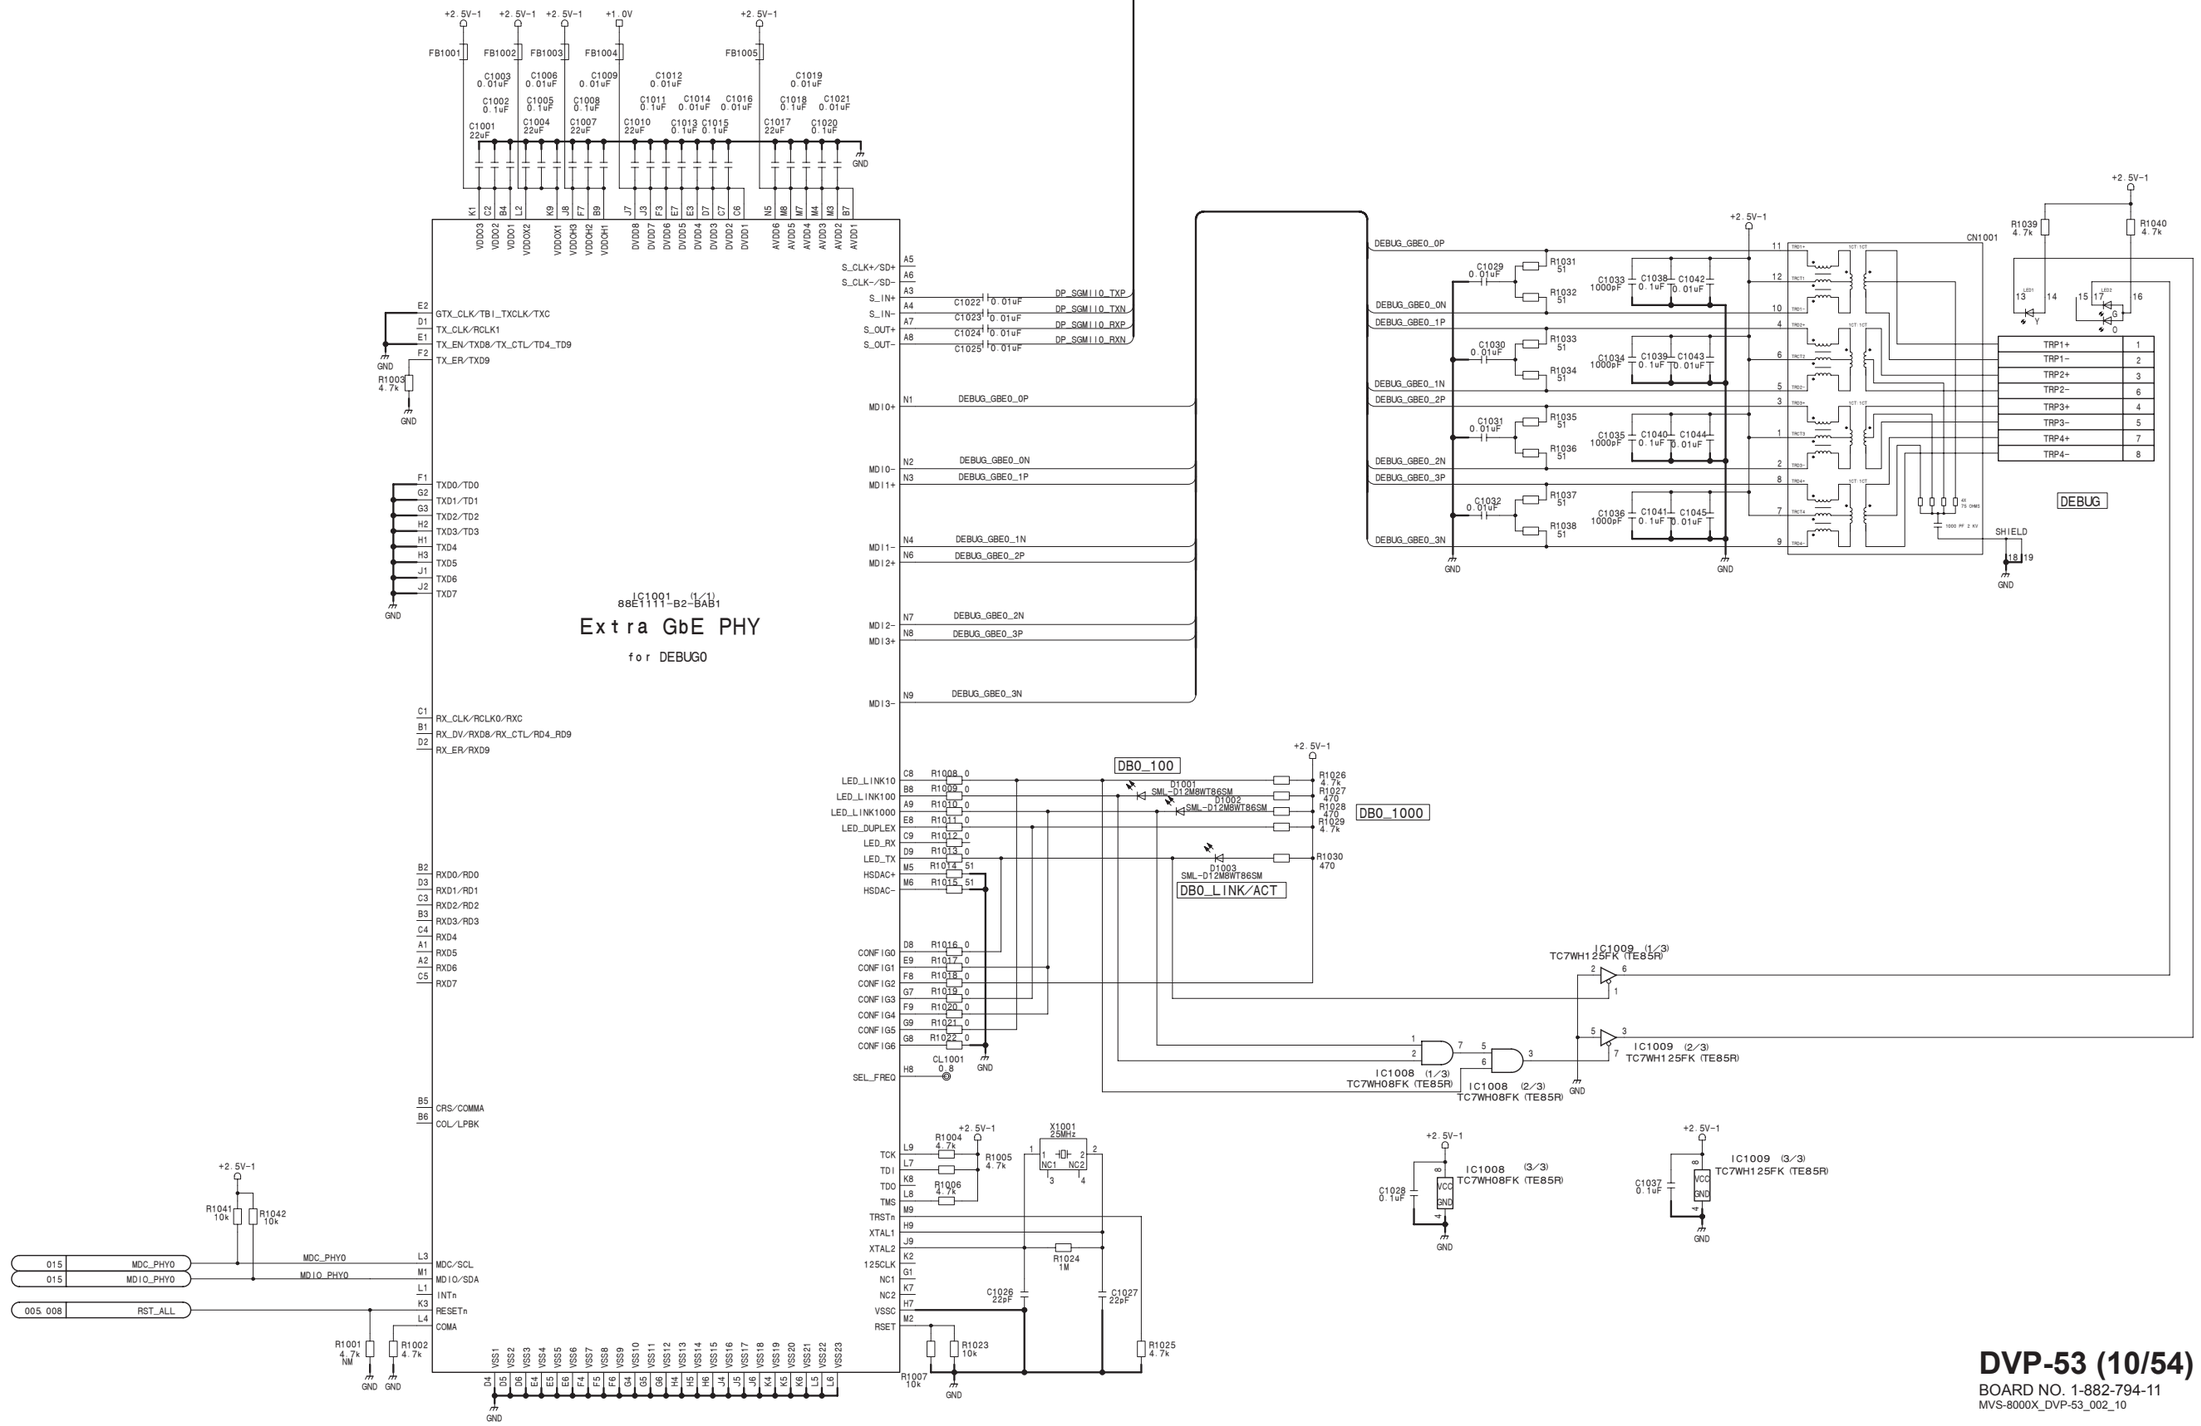

DVP-53 (10/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_10

DVP-53 (11/54)
SUFFIX: -11

Fm: CADEC2

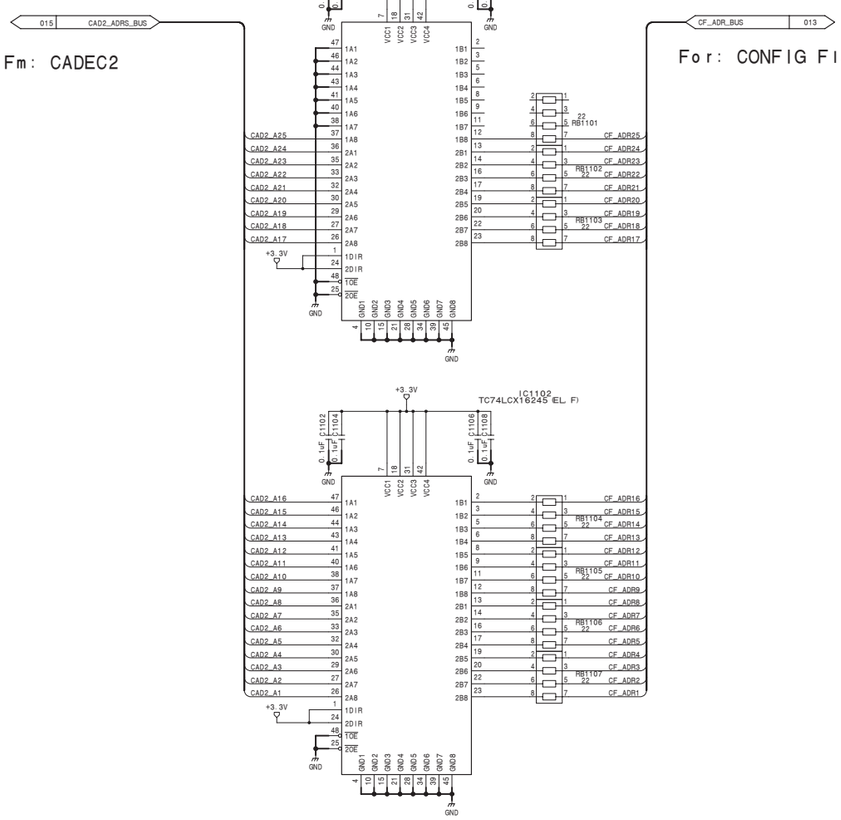

For: CONFIG Flash

Fm: CPU Module

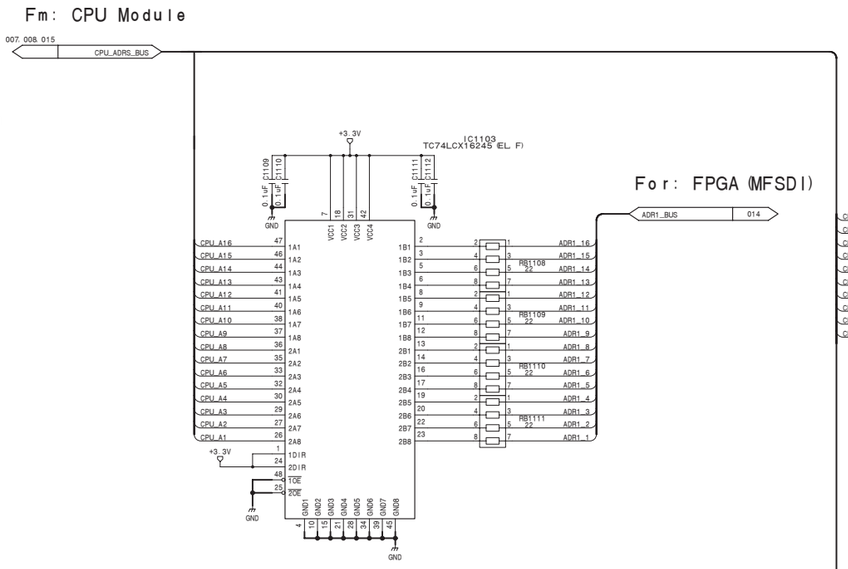

For: FPGA (MFSDI)

For: Appli Flash

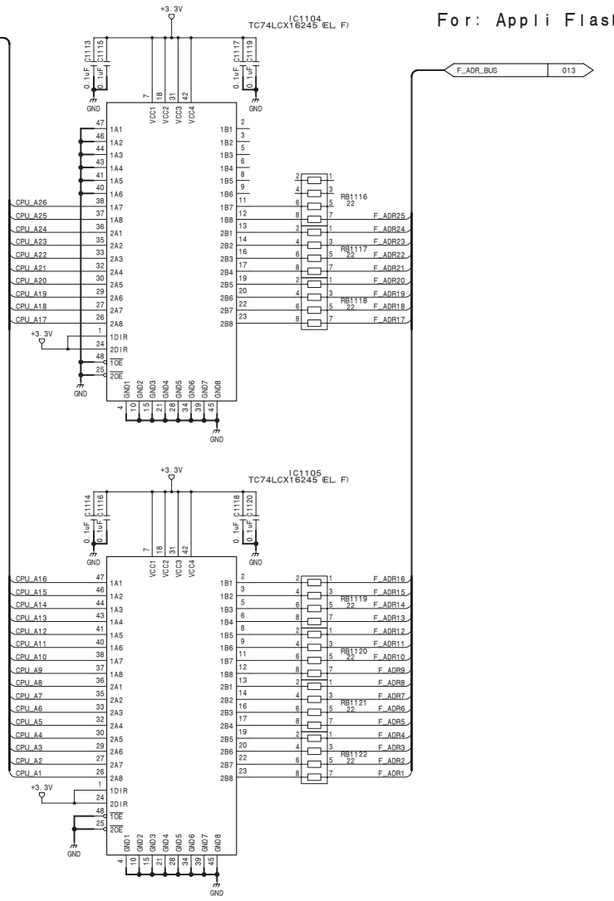

Fm: CADEC2

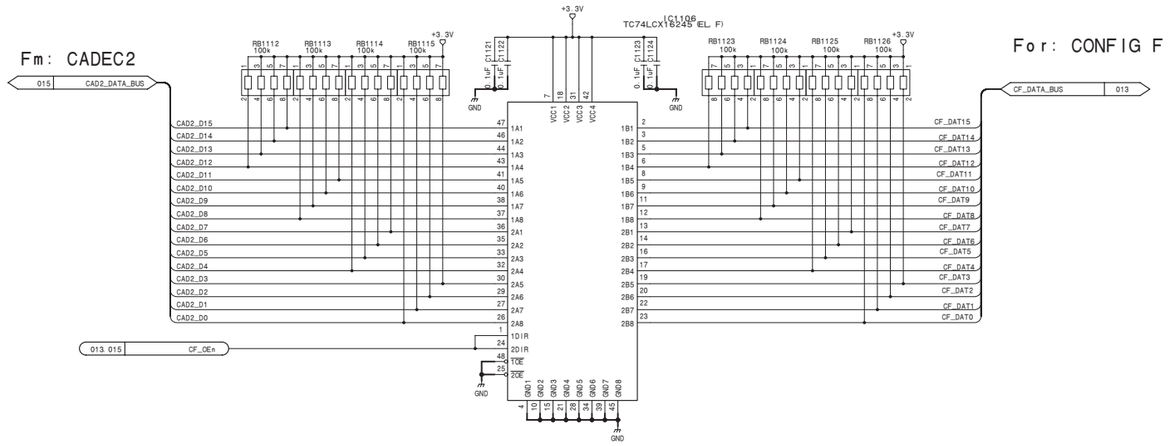

For: CONFIG Flash

DVP-53 (11/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_11

4-380

Fm: CPU Module

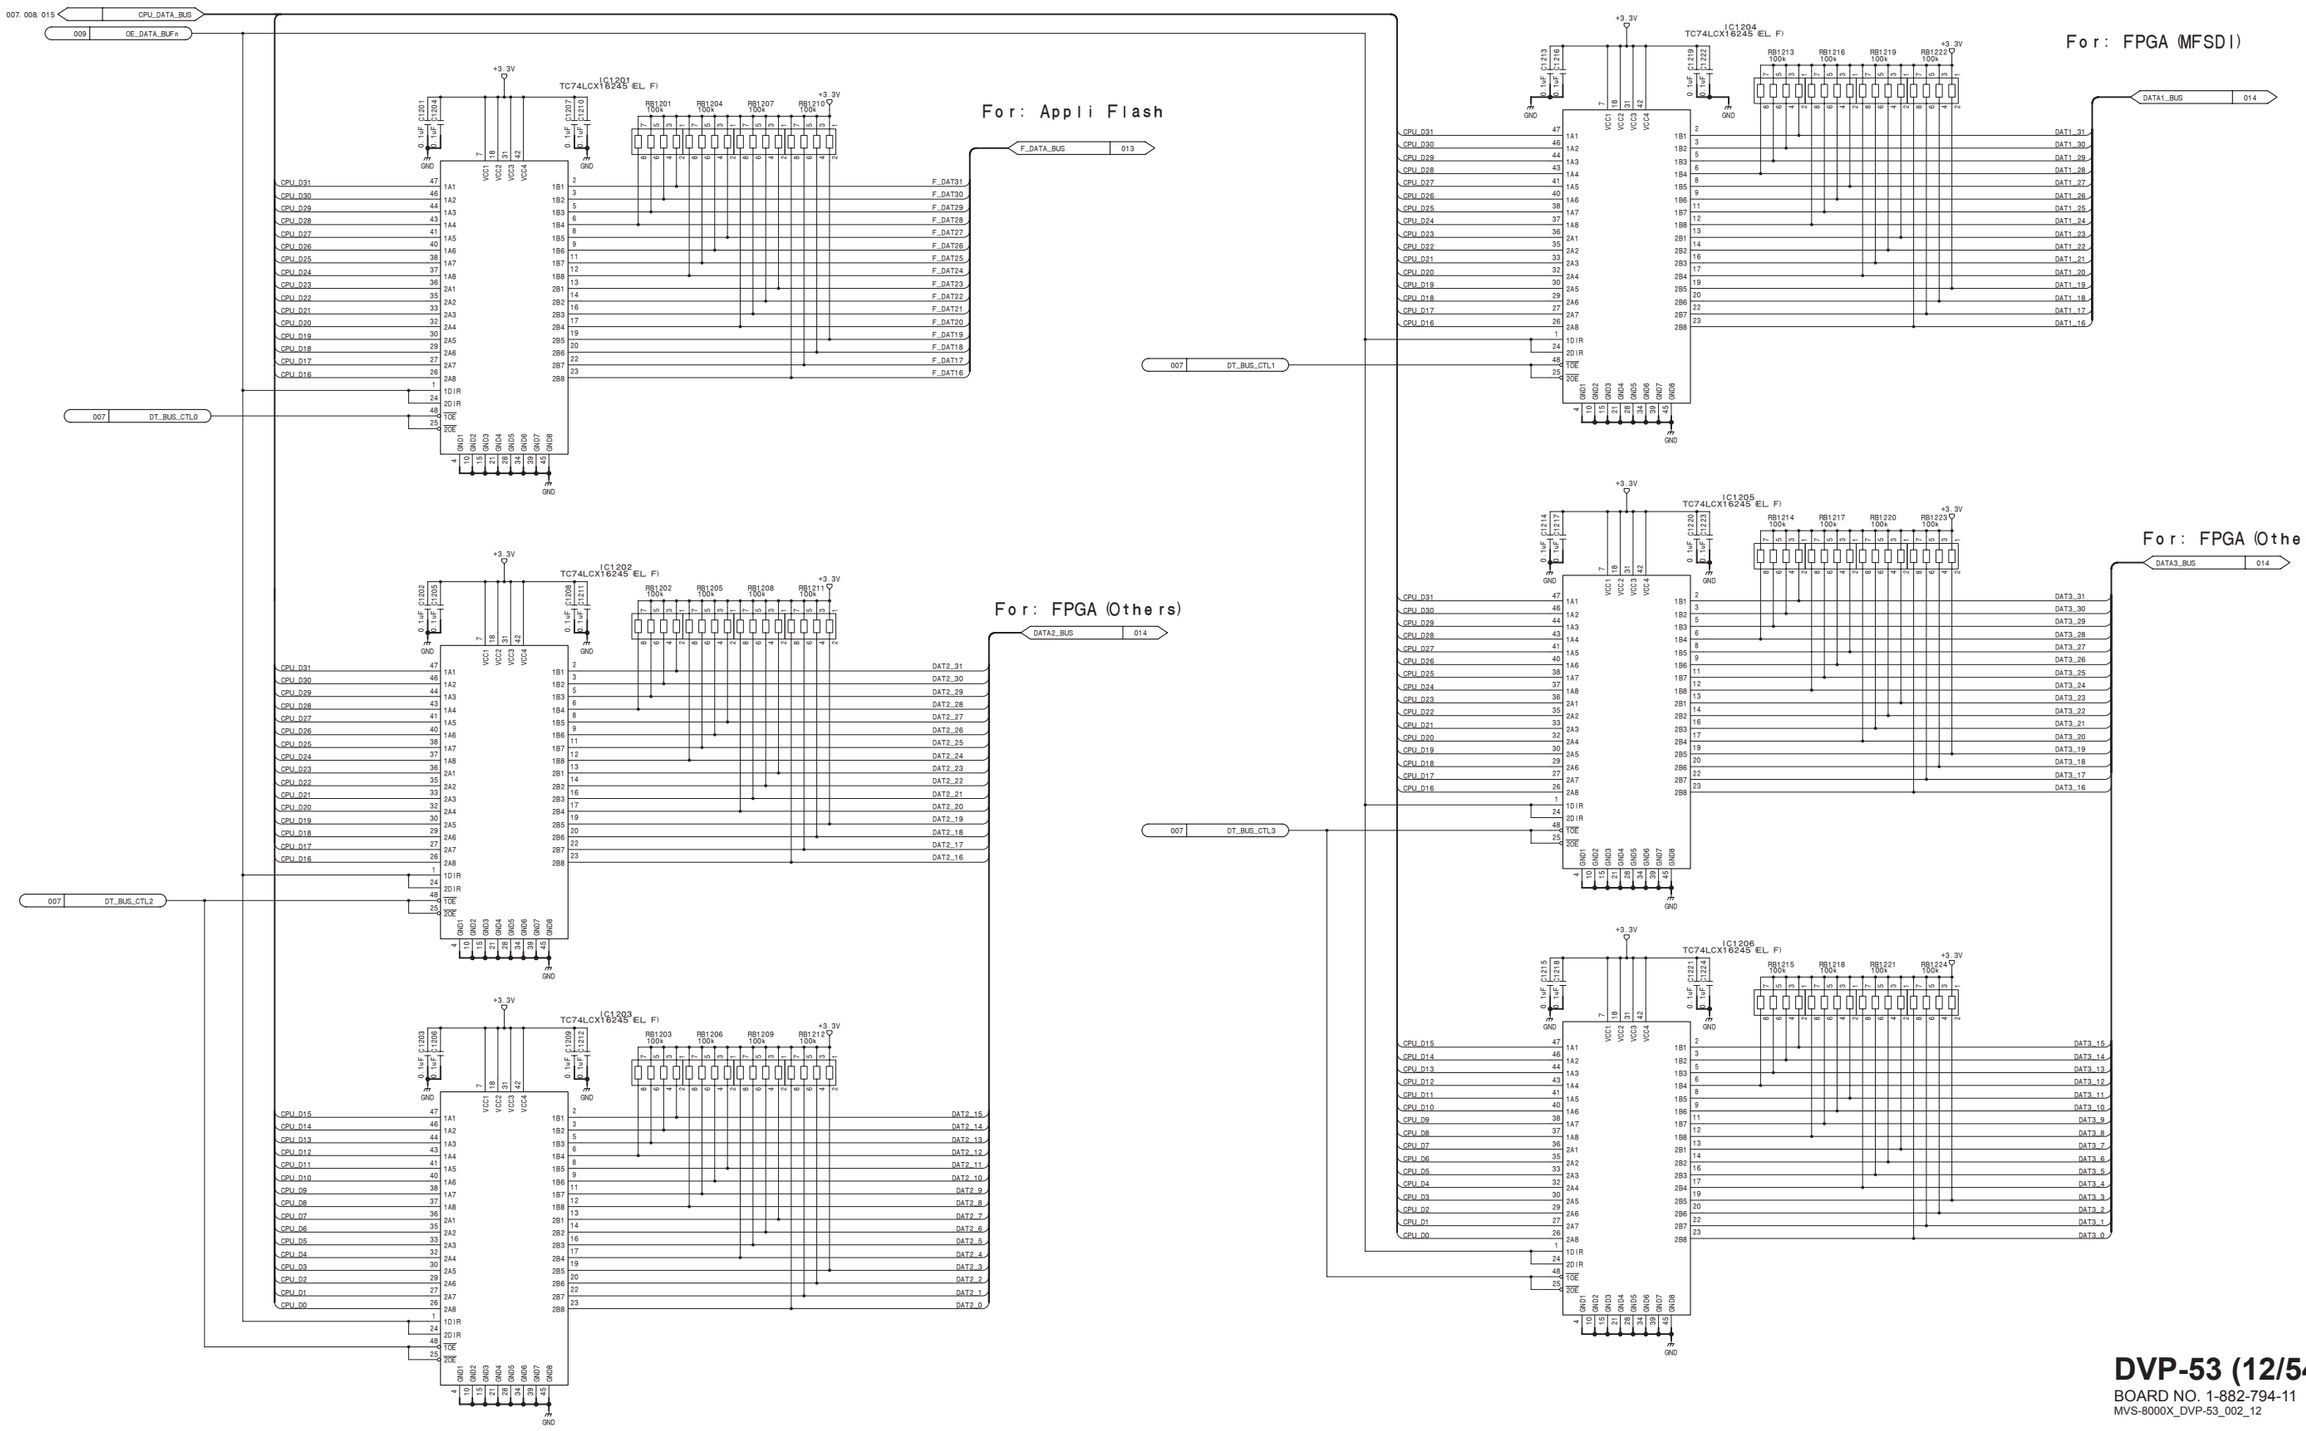

DVP-53 (12/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_12

DVP-53 (13/54)
SUFFIX: -11

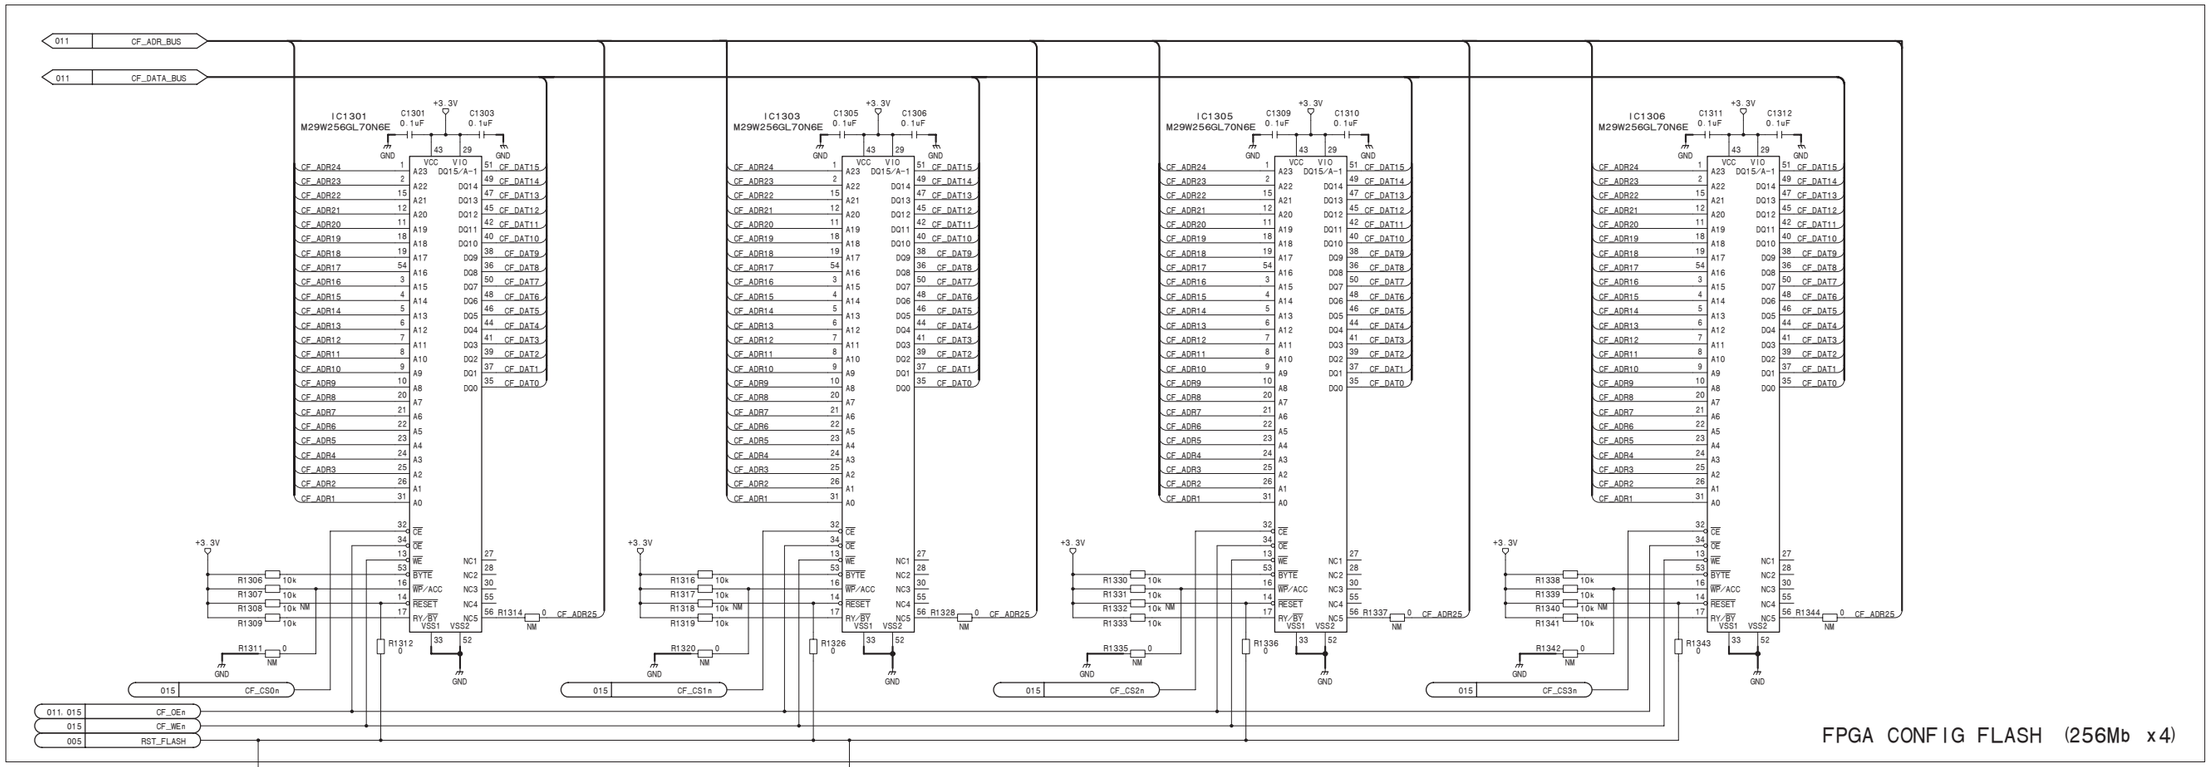

4-382

DVP-53 (13/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_13

DVP-53 (14/54)
SUFFIX: -11

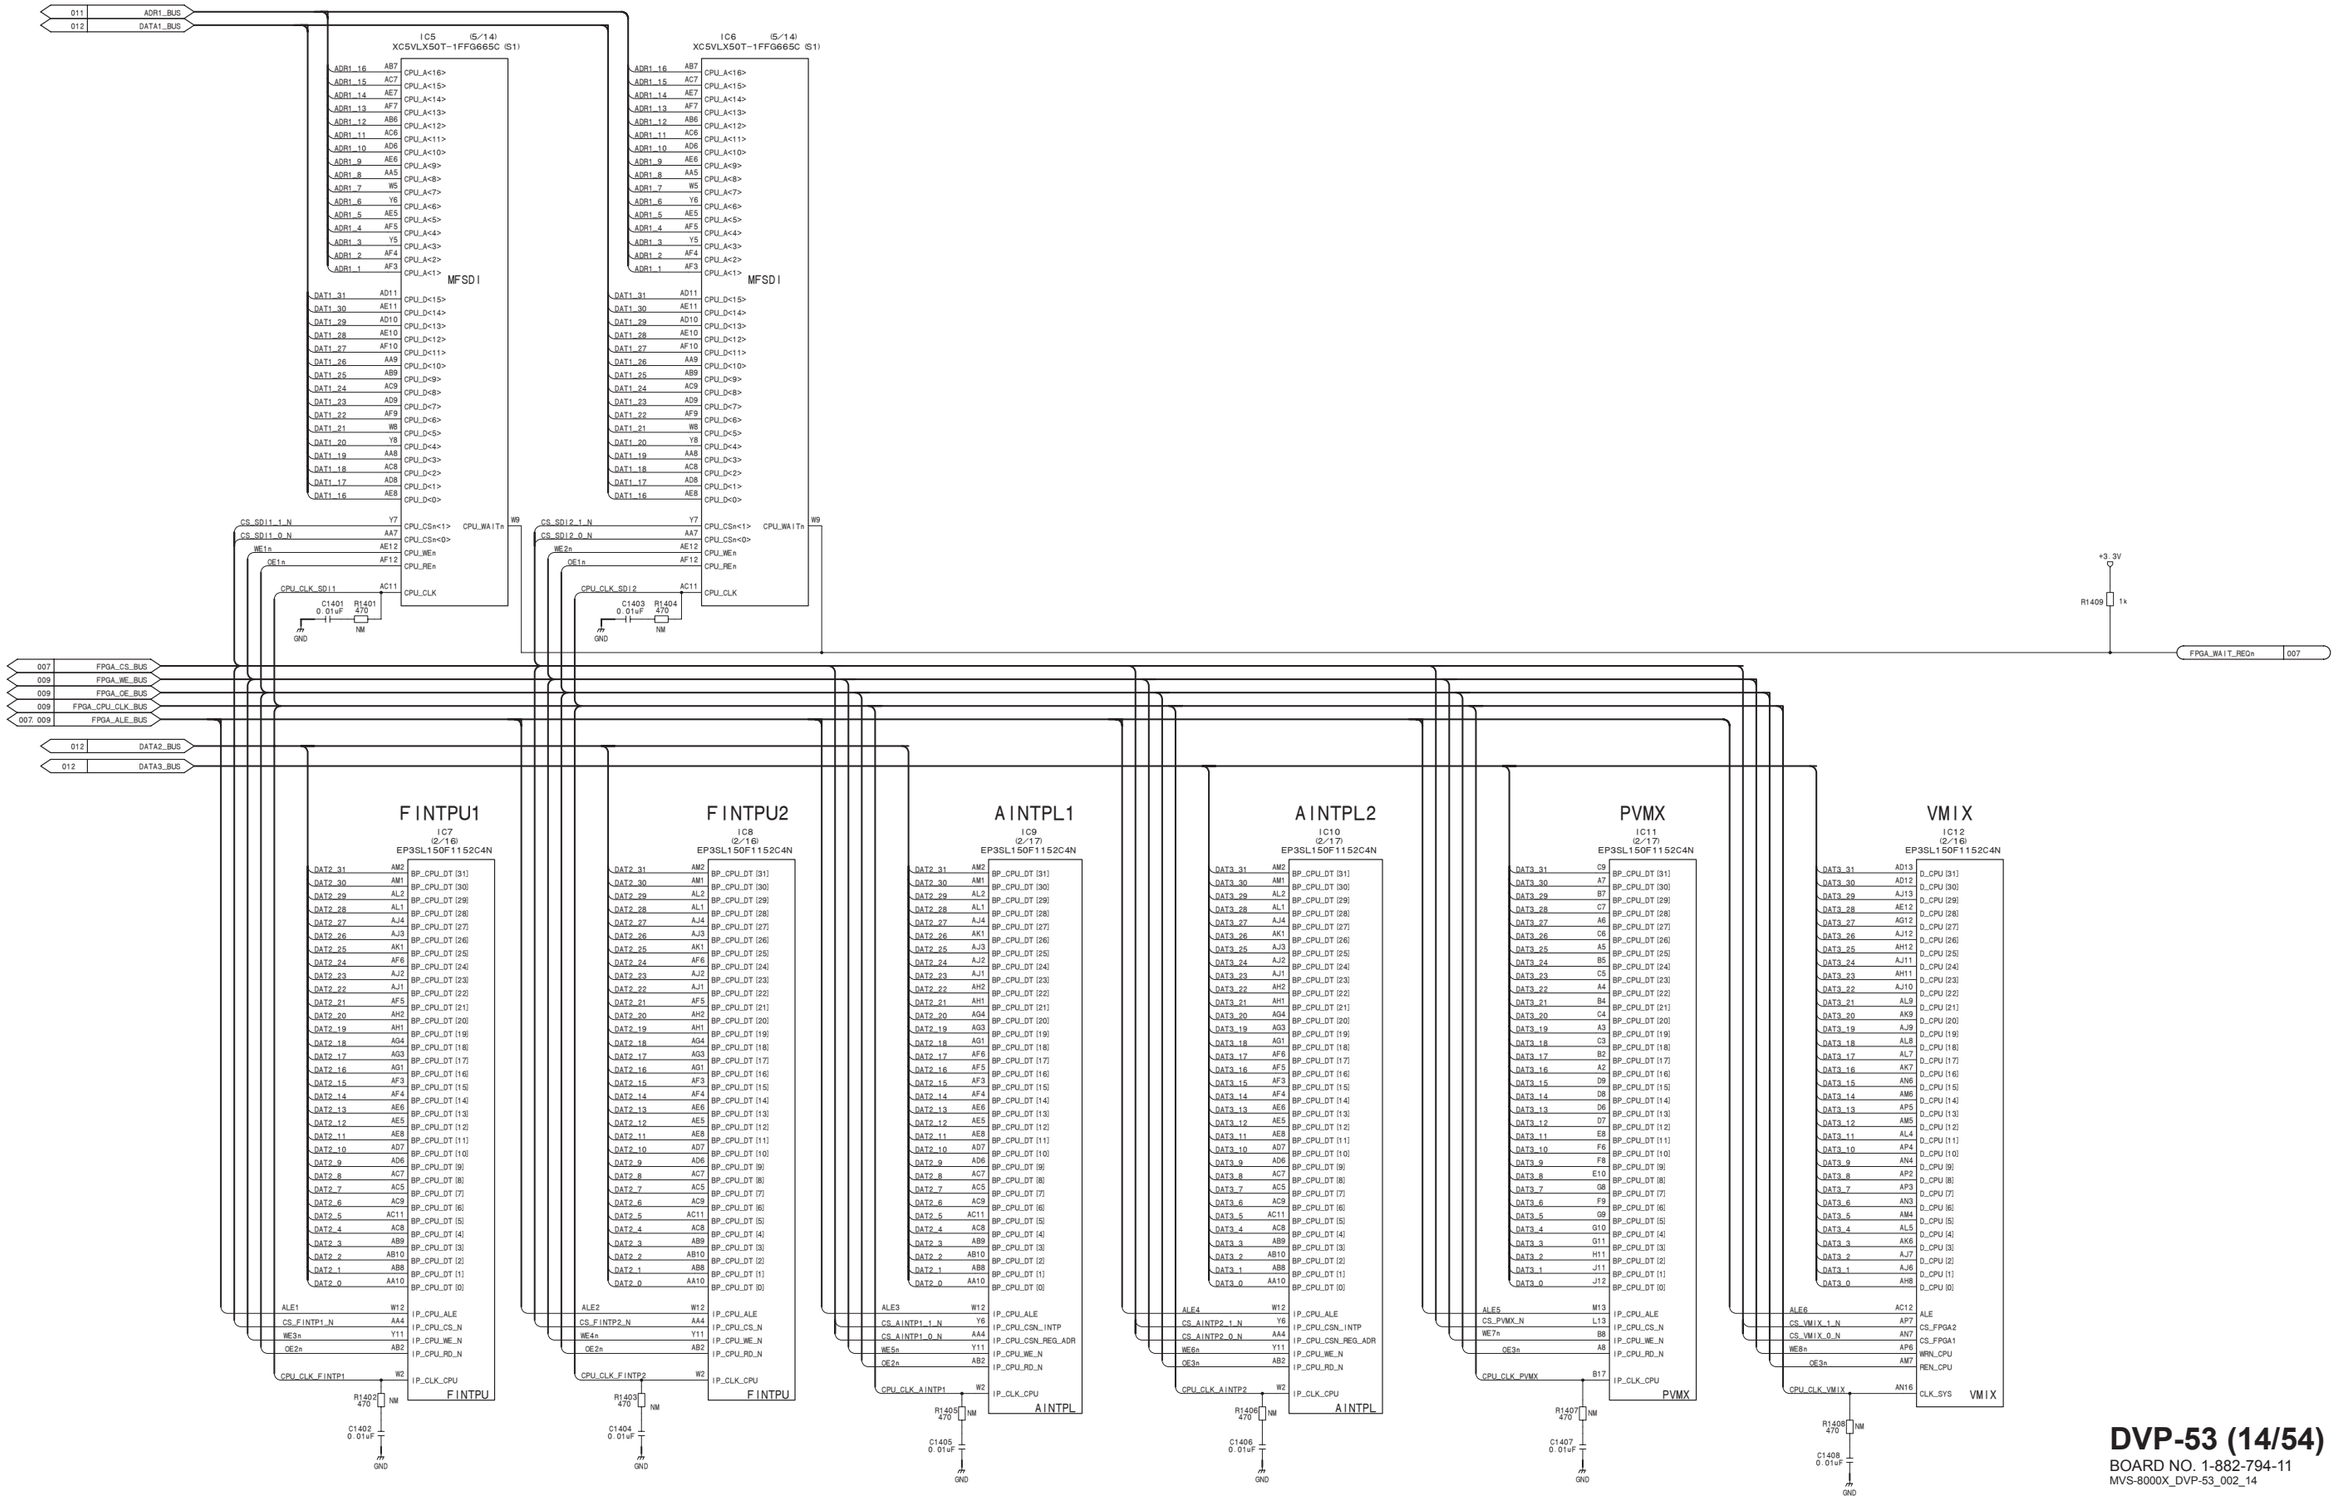

DVP-53 (14/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_14

DVP-53 (15/54)
SUFFIX: -11

CPU I/F

CADEC (VCC&GND)

CCAD [0] : ALL CONF DONE to CADEC1

CADEC2 CONF_DONE INPUT

M [2:0] =011
Internal Master SPI Mode

VS [2:0] =101
SPI Flash Read Comand = read
Maximum CLK rate: 33MHz

DVP-53 (15/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_15

4-384
MVS-8000X/7000X

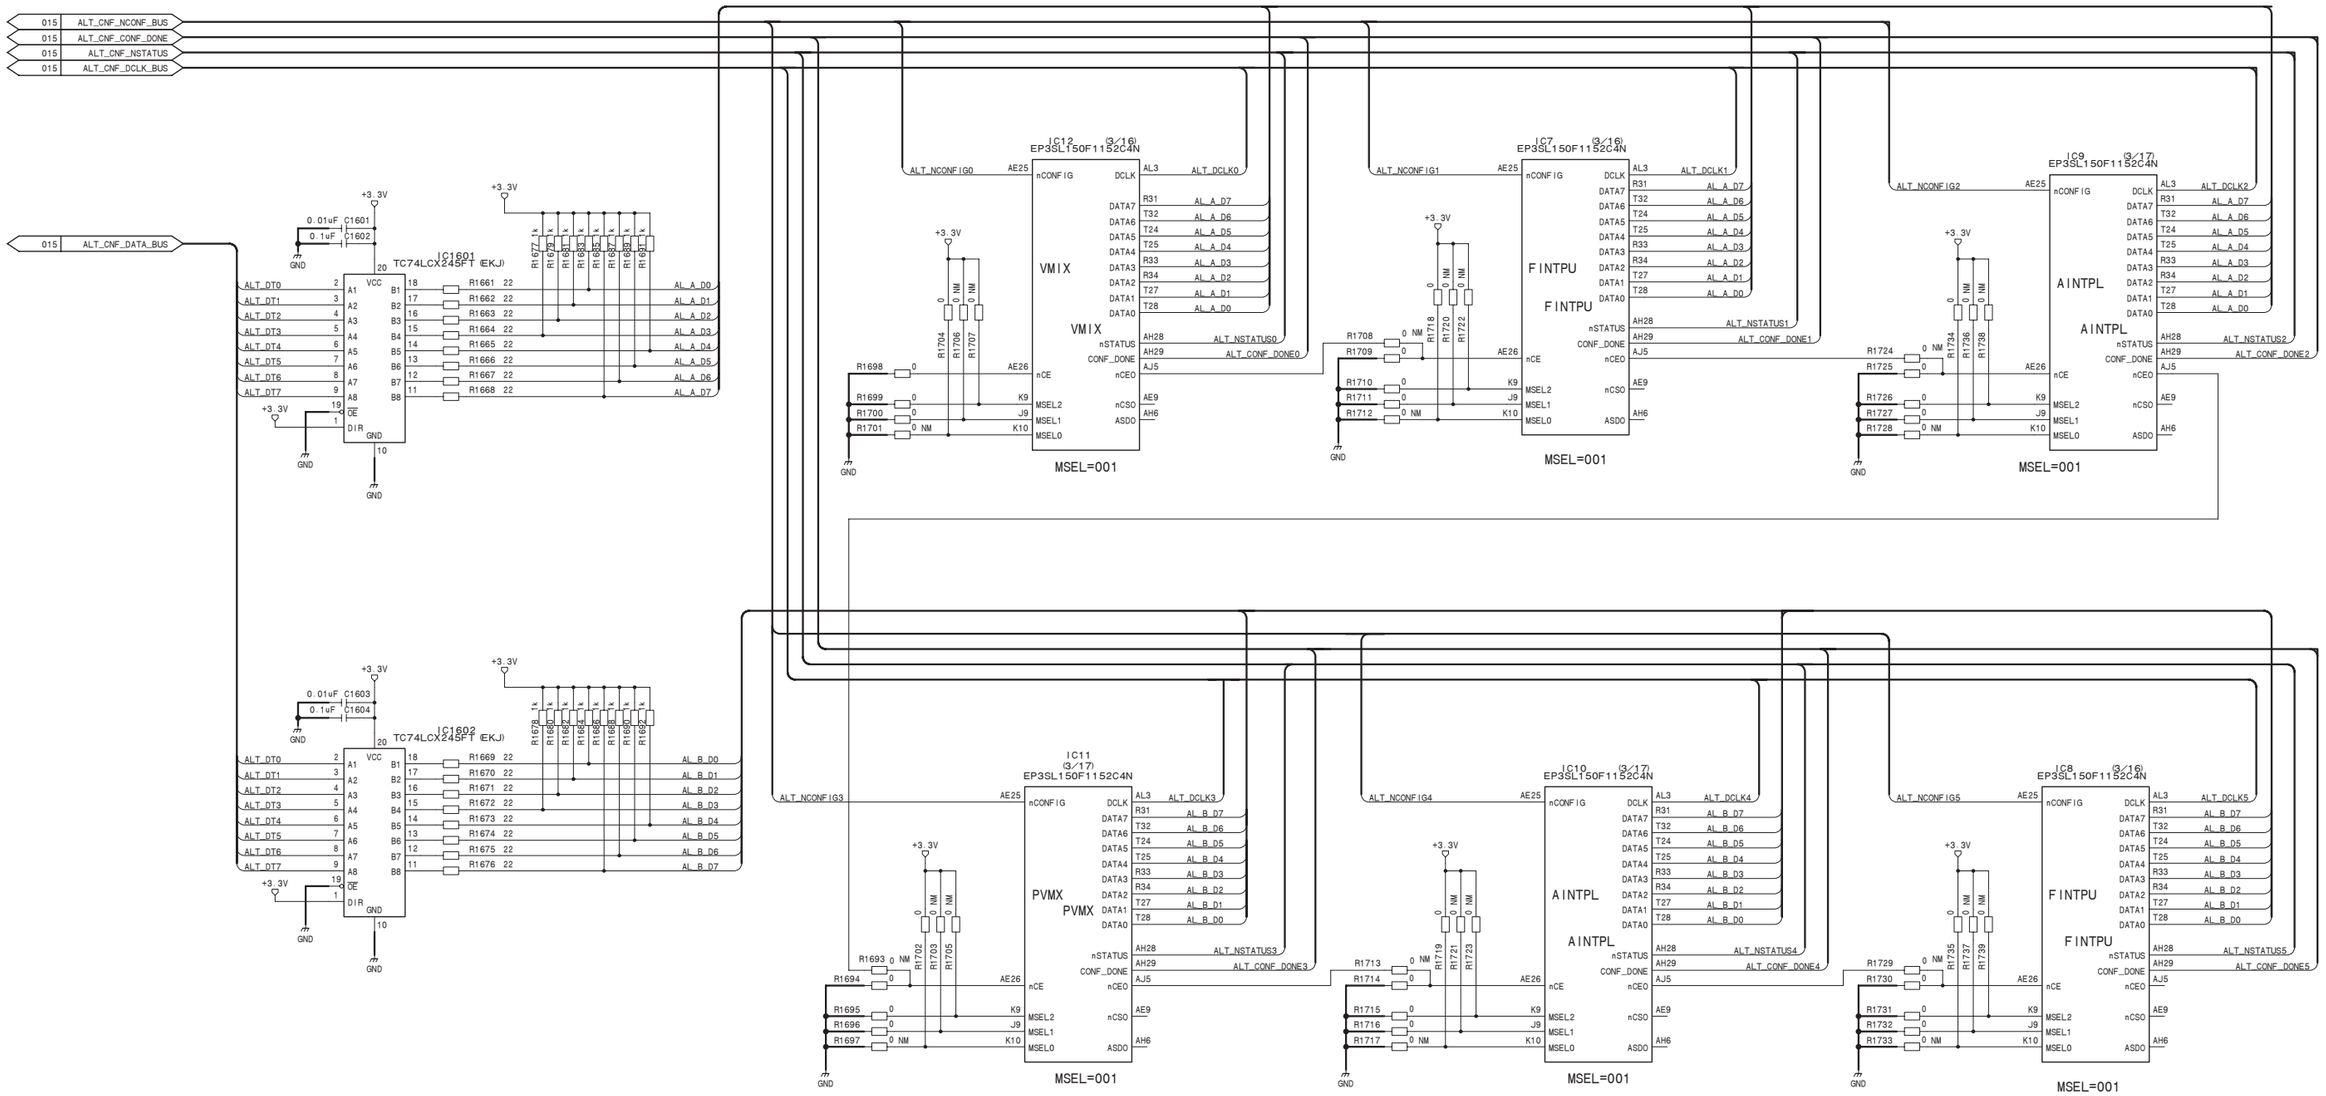

DVP-53 (16/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_16

DVP-53 (17/54)
SUFFIX: -11

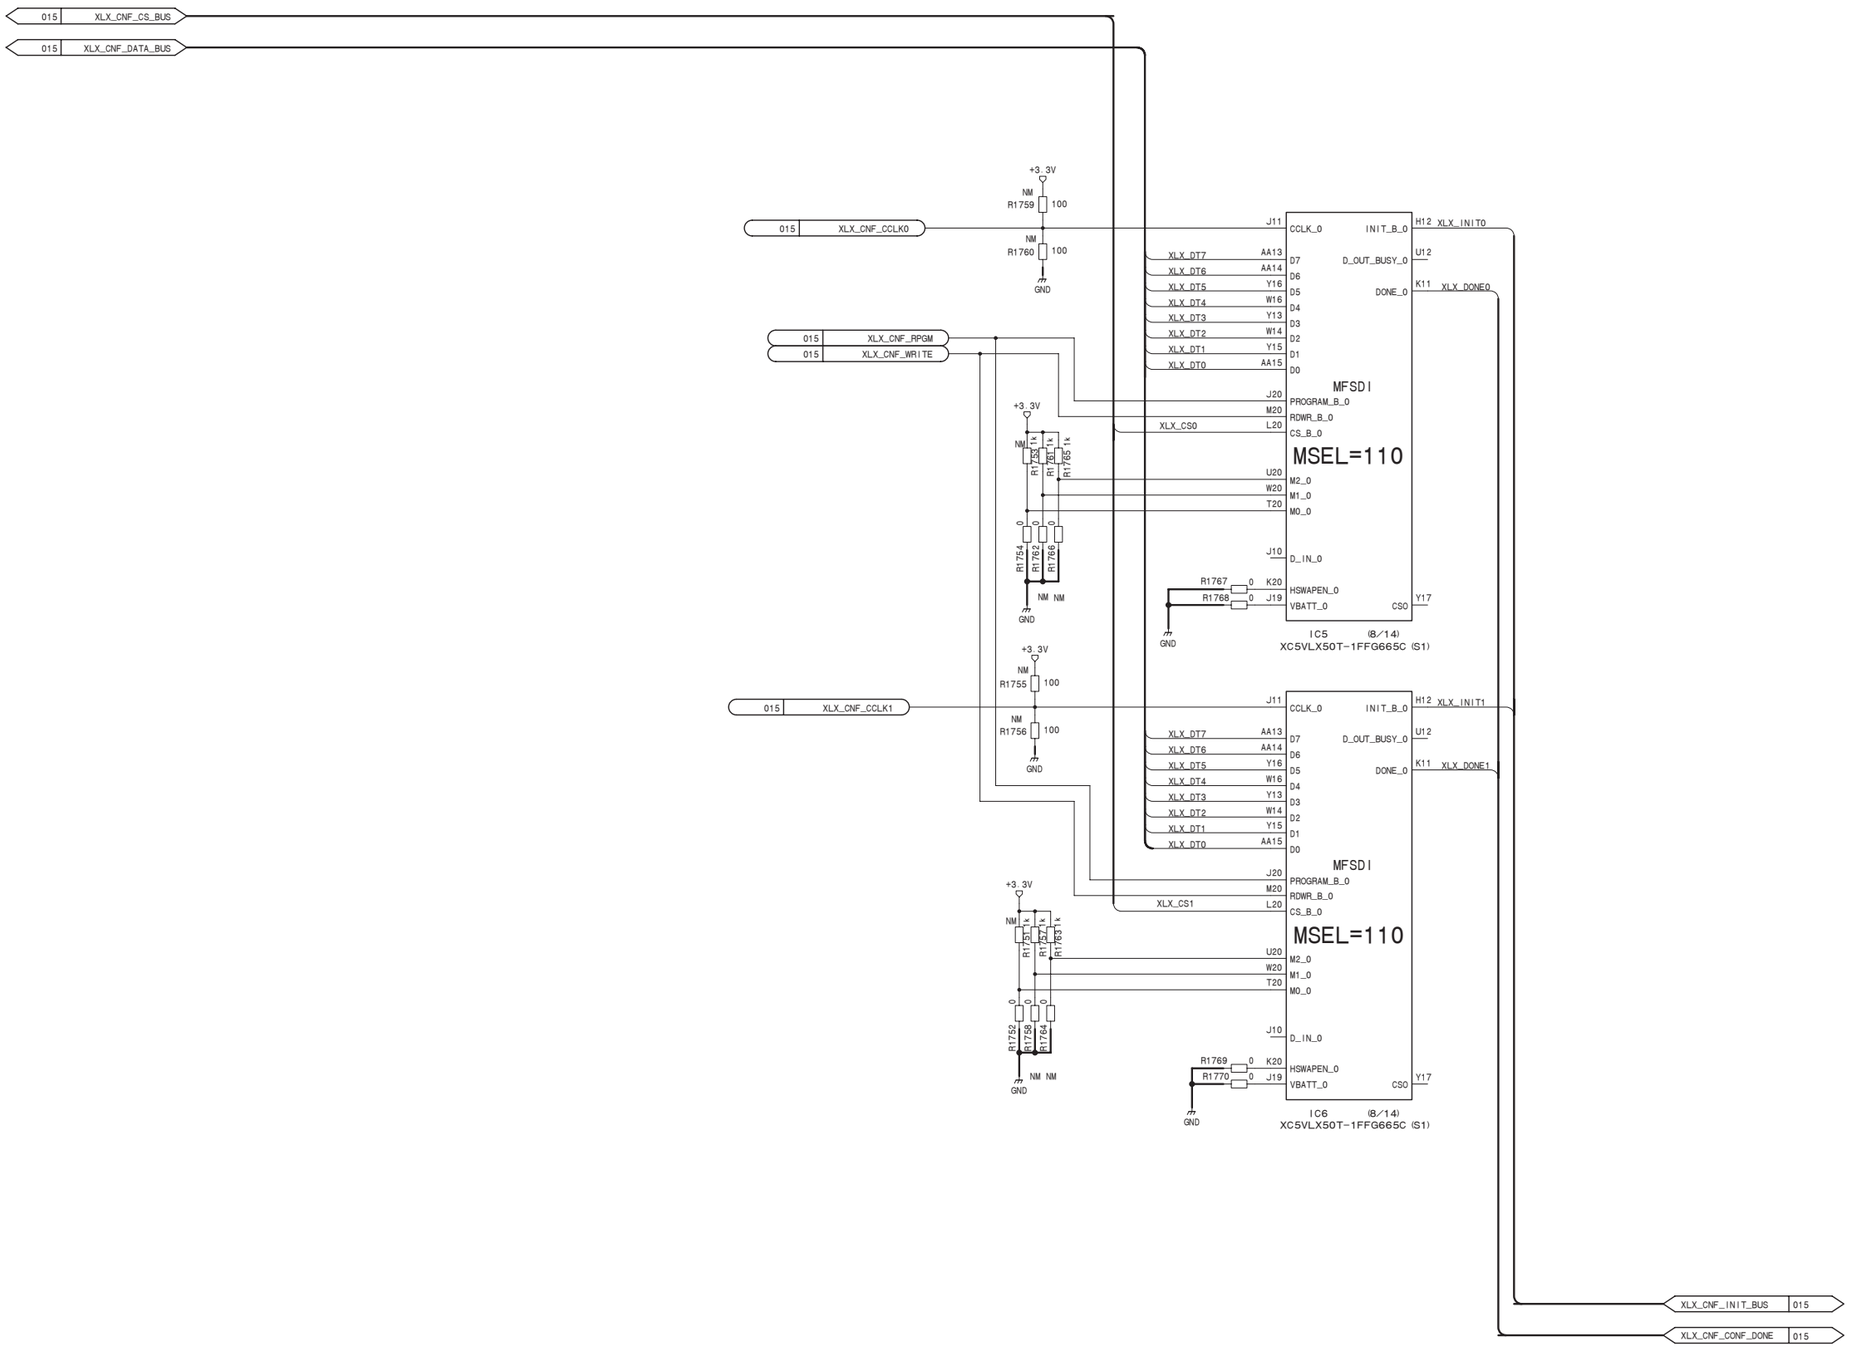

DVP-53 (17/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_17

4-386

JTAG_CHAIN \ Ref	R1845	R1842	R1848	R1849	R1852	R1853	R1854
DEFAULT	0	X	X	0	X	0	X
CADEC1, 2	0	X	X	X	0	X	0
FULL	X	0	0	0	X	0	X

(Note)
O:Mount
X:No mount

EPR2
CN1801
1 VCC
2 TRST/DATAOUT
3 TDI/ASDI
4 TDO/C_D
5 TMS/nCONF
6 TCK/DCLK
7 MODE
8 GND
9 nCE
10 nCS
Angle type

IC1801 IC1802 IC1803 IC1804 TC74LCX245FT (EKJ)

CADEC1 IC1 (4/6) XC3S200AN-4FTG256C4136
CADEC2 IC21 (4/6) XC3S200AN-4FTG256C4136
IP_JTAG_MODE

CPU_JTAG 008
CPU Module
DP_TDI DP_TDO DP_TMS DP_TCK

IC12 EP3SL150F1152C4N (4/16) VMIX
IC6 XC5VLX50T-1FFG665C (S1) (7/14) MFSDI_IC6
IC5 XC5VLX50T-1FFG665C (S1) (7/14) MFSDI_IC5
IC7 EP3SL150F1152C4N (4/16) FINTPU_IC7

IC9 IC11 IC10 IC8 EP3SL150F1152C4N (4/17)
AINTPL_IC9 PVMX AINTPL_IC10 FINTPU_IC8

1: CADEC1
2: CADEC2
3: CPU-DP
3: VMIX
4: SDI2 (IC)
5: SDI1 (IC)
6: FINTPU1 (IC)
7: AINTPL1 (IC)
9: PVMX
10: AINTPL2 (IC)
11: FINTPU2 (IC)

DVP-53 (18/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_18

DVP-53 (19/54) **SUFFIX: -11**

VIN

IC5 (3/14) XC5VLX50T-1FFG665C (S1)

001	MVEI_1VP	C1901 10uF	C1	VID_RX1p	SS_TX0p E26 → SS_VIDEO_CH0p
001	MVEI_1VN	C1902 10uF	D1	VID_RX1n	SS_TX0n E25 → SS_VIDEO_CH0n
					SS_TX1p F25 → SS_VIDEO_CH1p
					SS_TX1n G26 → SS_VIDEO_CH1n
001	MVEI_3VP	C1903 10uF	F1	VID_RX2p	SS_TX2p F24 → SS_VIDEO_CH2p
001	MVEI_3VN	C1904 10uF	E1	VID_RX2n	SS_TX2n G24 → SS_VIDEO_CH2n
					SS_TX3p H26 → SS_VIDEO_CH3p
					SS_TX3n G25 → SS_VIDEO_CH3n
001	MVEI_1KP	C1905 10uF	J1	VID_RX3p	SS_TX4p J25
001	MVEI_1KN	C1906 10uF	K1	VID_RX3n	SS_TX4n J26
					SS_TX5p H24 → SS_VIDEO_CH4p
					SS_TX5n J24 → SS_VIDEO_CH4n
001	MVEI_3KN	C1908 10uF	M1	VID_RX4p	SS_TX6p K26
001	MVEI_3KP	C1907 10uF	L1	VID_RX4n	SS_TX6n L25
					SS_TX7p L24 → SS_VIDEO_CH5p
					SS_TX7n K25 → SS_VIDEO_CH5n

P/N Change

MFSDI

001	MVEI_2VP	C1909 10uF	R1	VID_RX5p	SS_TX8p P26 → SS_VIDEO_CH6p
001	MVEI_2VN	C1910 10uF	T1	VID_RX5n	SS_TX8n R26 → SS_VIDEO_CH6n
					SS_TX9p P25 → SS_VIDEO_CH7p
					SS_TX9n R25 → SS_VIDEO_CH7n
001	MVEI_4VP	C1911 10uF	V1	VID_RX6p	SS_TX10p U25 → SS_VIDEO_CH8p
001	MVEI_4VN	C1912 10uF	U1	VID_RX6n	SS_TX10n T25 → SS_VIDEO_CH8n
					SS_TX11p U26 → SS_VIDEO_CH9p
					SS_TX11n V26 → SS_VIDEO_CH9n
001	MVEI_2KP	C1913 10uF	AA1	VID_RX7p	SS_TX12p U24
001	MVEI_2KN	C1914 10uF	AB1	VID_RX7n	SS_TX12n V24
					SS_TX13p W26 → SS_VIDEO_CH10p
					SS_TX13n W25 → SS_VIDEO_CH10n
001	MVEI_4KP	C1915 10uF	AD1	VID_RX8p	SS_TX14p Y26
001	MVEI_4KN	C1916 10uF	AC1	VID_RX8n	SS_TX14n Y25
					SS_TX15p AA25 → SS_VIDEO_CH11p
					SS_TX15n AB26 → SS_VIDEO_CH11n
					SS_SYNCOp M25
					SS_SYNCOn M24
					SS_CLKOp N26 → SS_VIDEO_CLKp
					SS_CLKOn M26 → SS_VIDEO_CLKn
					SS_ALGN_OK_R U21 → SS_VIDEO_LOCK
					SS_ALGN_OK_RM V21

EXTV IN

IC6 (3/14) XC5VLX50T-1FFG665C (S1)

001	EXTIN_1VP	C1917 10uF	C1	VID_RX1p	SS_TX0p E26 → SS_EXTV_CH0p
001	EXTIN_1VN	C1918 10uF	D1	VID_RX1n	SS_TX0n E25 → SS_EXTV_CH0n
					SS_TX1p F25 → SS_EXTV_CH1p
					SS_TX1n G26 → SS_EXTV_CH1n
001	EXTIN_3VP	C1919 10uF	F1	VID_RX2p	SS_TX2p F24 → SS_EXTV_CH2p
001	EXTIN_3VN	C1920 10uF	E1	VID_RX2n	SS_TX2n G24 → SS_EXTV_CH2n
					SS_TX3p H26 → SS_EXTV_CH3p
					SS_TX3n G25 → SS_EXTV_CH3n
001	EXTIN_2VP	C1921 10uF	J1	VID_RX3p	SS_TX4p J25 → SS_EXTV_CH4p
001	EXTIN_2VN	C1922 10uF	K1	VID_RX3n	SS_TX4n J26 → SS_EXTV_CH4n
					SS_TX5p H24 → SS_EXTV_CH5p
					SS_TX5n J24 → SS_EXTV_CH5n
001	EXTIN_4VP	C1923 10uF	M1	VID_RX4p	SS_TX6p K26 → SS_EXTV_CH6p
001	EXTIN_4VN	C1924 10uF	L1	VID_RX4n	SS_TX6n L25 → SS_EXTV_CH6n
					SS_TX7p L24 → SS_EXTV_CH7p
					SS_TX7n K25 → SS_EXTV_CH7n

MFSDI

R1				VID_RX5p	SS_TX8p P26 → SS_EXTV_CLKp
T1				VID_RX5n	SS_TX8n R26 → SS_EXTV_CLKn
					SS_TX9p P25
					SS_TX9n R25
V1				VID_RX6p	SS_TX10p U25
U1				VID_RX6n	SS_TX10n T25
					SS_TX11p U26
					SS_TX11n V26
AA1				VID_RX7p	SS_TX12p U24
AB1				VID_RX7n	SS_TX12n V24
					SS_TX13p W26
					SS_TX13n W25
AD1				VID_RX8p	SS_TX14p Y26
AC1				VID_RX8n	SS_TX14n Y25
GND					SS_TX15p AA25
					SS_TX15n AB26
					SS_SYNCOp M25
					SS_SYNCOn M24
					SS_CLKOp N26 → SS_EXTV_CLKp
					SS_CLKOn M26 → SS_EXTV_CLKn
					SS_ALGN_OK_R U21 → SS_EXTV_LOCK
					SS_ALGN_OK_RM V21

PVMX

IC11 (5/17) EP3SL150F1152C4N

SS_VIDEO_CH0p	M31	IP_SS_VIDEO [0]	OP_SS_FLTR0 [0]	AA10 → SS_FLTR0_CH0p
SS_VIDEO_CH0n	N32	IP_SS_VIDEO [0] (n)	OP_SS_FLTR0 [0] (n)	AB9 → SS_FLTR0_CH0n
SS_VIDEO_CH1p	J31	IP_SS_VIDEO [1]	OP_SS_FLTR0 [1]	AA12 → SS_FLTR0_CH1p
SS_VIDEO_CH1n	J32	IP_SS_VIDEO [1] (n)	OP_SS_FLTR0 [1] (n)	AB11 → SS_FLTR0_CH1n
SS_VIDEO_CH2p	K31	IP_SS_VIDEO [2]	OP_SS_FLTR0 [2]	AB8 → SS_FLTR0_CH2p
SS_VIDEO_CH2n	K32	IP_SS_VIDEO [2] (n)	OP_SS_FLTR0 [2] (n)	AC7 → SS_FLTR0_CH2n
SS_VIDEO_CH3p	K33	IP_SS_VIDEO [3]	OP_SS_FLTR0 [3]	AC11 → SS_FLTR0_CH3p
SS_VIDEO_CH3n	K34	IP_SS_VIDEO [3] (n)	OP_SS_FLTR0 [3] (n)	AB10 → SS_FLTR0_CH3n
SS_VIDEO_CH4p	J33	IP_SS_VIDEO [4]	OP_SS_FLTR0 [4]	AC6 → SS_FLTR0_CH4p
SS_VIDEO_CH4n	J34	IP_SS_VIDEO [4] (n)	OP_SS_FLTR0 [4] (n)	AC5 → SS_FLTR0_CH4n
SS_VIDEO_CH5p	H31	IP_SS_VIDEO [5]	OP_SS_FLTR0 [5]	Y10 → SS_FLTR0_CH5p
SS_VIDEO_CH5n	H32	IP_SS_VIDEO [5] (n)	OP_SS_FLTR0 [5] (n)	Y9 → SS_FLTR0_CH5n
SS_VIDEO_CH6p	G33	IP_SS_VIDEO [6]	OP_SS_FLTR0 [6]	AA7 → SS_FLTR0_CH6p
SS_VIDEO_CH6n	F34	IP_SS_VIDEO [6] (n)	OP_SS_FLTR0 [6] (n)	AA6 → SS_FLTR0_CH6n
SS_VIDEO_CH7p	H34	IP_SS_VIDEO [7]	OP_SS_FLTR0 [7]	AE6 → SS_FLTR0_CH7p
SS_VIDEO_CH7n	G34	IP_SS_VIDEO [7] (n)	OP_SS_FLTR0 [7] (n)	AE5 → SS_FLTR0_CH7n
SS_VIDEO_CH8p	F31	IP_SS_VIDEO [8]	OP_SS_FLTR0 [8]	AB6 → SS_FLTR0_CH8p
SS_VIDEO_CH8n	F32	IP_SS_VIDEO [8] (n)	OP_SS_FLTR0 [8] (n)	AB5 → SS_FLTR0_CH8n
SS_VIDEO_CH9p	F33	IP_SS_VIDEO [9]	OP_SS_FLTR0 [9]	AD4 → SS_FLTR0_CH9p
SS_VIDEO_CH9n	E34	IP_SS_VIDEO [9] (n)	OP_SS_FLTR0 [9] (n)	AD3 → SS_FLTR0_CH9n
SS_VIDEO_CH10p	D33	IP_SS_VIDEO [10]	OP_SS_FLTR0 [10]	AD7 → SS_FLTR0_CH10p
SS_VIDEO_CH10n	D34	IP_SS_VIDEO [10] (n)	OP_SS_FLTR0 [10] (n)	AD6 → SS_FLTR0_CH10n
SS_VIDEO_CH11p	C33	IP_SS_VIDEO [11]	OP_SS_FLTR0 [11]	AH5 → SS_FLTR0_CH11p
SS_VIDEO_CH11n	C34	IP_SS_VIDEO [11] (n)	OP_SS_FLTR0 [11] (n)	AH4 → SS_FLTR0_CH11n
			OP_SS_FLTR0 [12]	AF6 → SS_FLTR0_CH12p
SS_VIDEO_CLKp R1901 100	T33	IP_SS_VIDEO_CLK	OP_SS_FLTR0 [12] (n)	AF5 → SS_FLTR0_CH12n
SS_VIDEO_CLKn	T34	IP_SS_VIDEO_CLK (n)	OP_SS_FLTR0 [13]	AC9 → SS_FLTR0_CH13p
			OP_SS_FLTR0 [13] (n)	AC8 → SS_FLTR0_CH13n
SS_VIDEO_LOCK	T30	OP_VIDEO_LOCK	OP_SS_FLTR0 [14]	AE8 → SS_FLTR0_CH14p
			OP_SS_FLTR0 [14] (n)	AE7 → SS_FLTR0_CH14n
			OP_SS_FLTR0_CLK	Y10 → SS_FLTR0_CLKp
			OP_SS_FLTR0_CLK (n)	W9 → SS_FLTR0_CLKn
			IP_FLTR0_LOCK	V3 → SS_FLTR0_LOCK
SS_EXTV_CH0p	AE33	IP_SS_EXTV [0]	OP_SS_FLTR1 [0]	M7 → SS_FLTR1_CH0p
SS_EXTV_CH0n	AE34	IP_SS_EXTV [0] (n)	OP_SS_FLTR1 [0] (n)	M6 → SS_FLTR1_CH0n
SS_EXTV_CH1p	AC31	IP_SS_EXTV [1]	OP_SS_FLTR1 [1]	N9 → SS_FLTR1_CH1p
SS_EXTV_CH1n	AC32	IP_SS_EXTV [1] (n)	OP_SS_FLTR1 [1] (n)	N8 → SS_FLTR1_CH1n
SS_EXTV_CH2p	AD33	IP_SS_EXTV [2]	OP_SS_FLTR1 [2]	P6 → SS_FLTR1_CH2p
SS_EXTV_CH2n	AD34	IP_SS_EXTV [2] (n)	OP_SS_FLTR1 [2] (n)	P5 → SS_FLTR1_CH2n
SS_EXTV_CH3p	AC34	IP_SS_EXTV [3]	OP_SS_FLTR1 [3]	L7 → SS_FLTR1_CH3p
SS_EXTV_CH3n	AB34	IP_SS_EXTV [3] (n)	OP_SS_FLTR1 [3] (n)	L6 → SS_FLTR1_CH3n
SS_EXTV_CH4p	AB33	IP_SS_EXTV [4]	OP_SS_FLTR1 [4]	T5 → SS_FLTR1_CH4p
SS_EXTV_CH4n	AA34	IP_SS_EXTV [4] (n)	OP_SS_FLTR1 [4] (n)	T4 → SS_FLTR1_CH4n
SS_EXTV_CH5p	AB31	IP_SS_EXTV [5]	OP_SS_FLTR1 [5]	L5 → SS_FLTR1_CH5p
SS_EXTV_CH5n	AB32	IP_SS_EXTV [5] (n)	OP_SS_FLTR1 [5] (n)	L4 → SS_FLTR1_CH5n
SS_EXTV_CH6p	AA31	IP_SS_EXTV [6]	OP_SS_FLTR1 [6]	N6 → SS_FLTR1_CH6p
SS_EXTV_CH6n	AA32	IP_SS_EXTV [6] (n)	OP_SS_FLTR1 [6] (n)	N5 → SS_FLTR1_CH6n
SS_EXTV_CH7p	Y31	IP_SS_EXTV [7]	OP_SS_FLTR1 [7]	P8 → SS_FLTR1_CH7p
SS_EXTV_CH7n	Y32	IP_SS_EXTV [7] (n)	OP_SS_FLTR1 [7] (n)	P7 → SS_FLTR1_CH7n
			OP_SS_FLTR1 [8]	P11 → SS_FLTR1_CH8p
SS_EXTV_CLKp R1902 100	V33	IP_SS_EXTV_CLK	OP_SS_FLTR1 [8] (n)	P10 → SS_FLTR1_CH8n
SS_EXTV_CLKn	V34	IP_SS_EXTV_CLK (n)	OP_SS_FLTR1 [9]	R7 → SS_FLTR1_CH9p
			OP_SS_FLTR1 [9] (n)	R6 → SS_FLTR1_CH9n
SS_EXTV_LOCK	AC25	OP_EXTV_LOCK	OP_SS_FLTR1 [10]	T7 → SS_FLTR1_CH10p
			OP_SS_FLTR1 [10] (n)	U6 → SS_FLTR1_CH10n
			OP_SS_FLTR1 [11]	R10 → SS_FLTR1_CH11p
			OP_SS_FLTR1 [11] (n)	R9 → SS_FLTR1_CH11n
			OP_SS_FLTR1 [12]	T9 → SS_FLTR1_CH12p
			OP_SS_FLTR1 [12] (n)	T8 → SS_FLTR1_CH12n
			OP_SS_FLTR1 [13]	R12 → SS_FLTR1_CH13p
			OP_SS_FLTR1 [13] (n)	T11 → SS_FLTR1_CH13n
			OP_SS_FLTR1 [14]	U11 → SS_FLTR1_CH14p
			OP_SS_FLTR1 [14] (n)	U10 → SS_FLTR1_CH14n
			OP_SS_FLTR1_CLK	L9 → SS_FLTR1_CLKp
			OP_SS_FLTR1_CLK (n)	L8 → SS_FLTR1_CLKn
		PVMX	IP_FLTR1_LOCK	M9 → SS_FLTR1_LOCK

SS_FLTR0_BUS 020

SS_FLTR1_BUS 020

DVP-53 (19/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_19

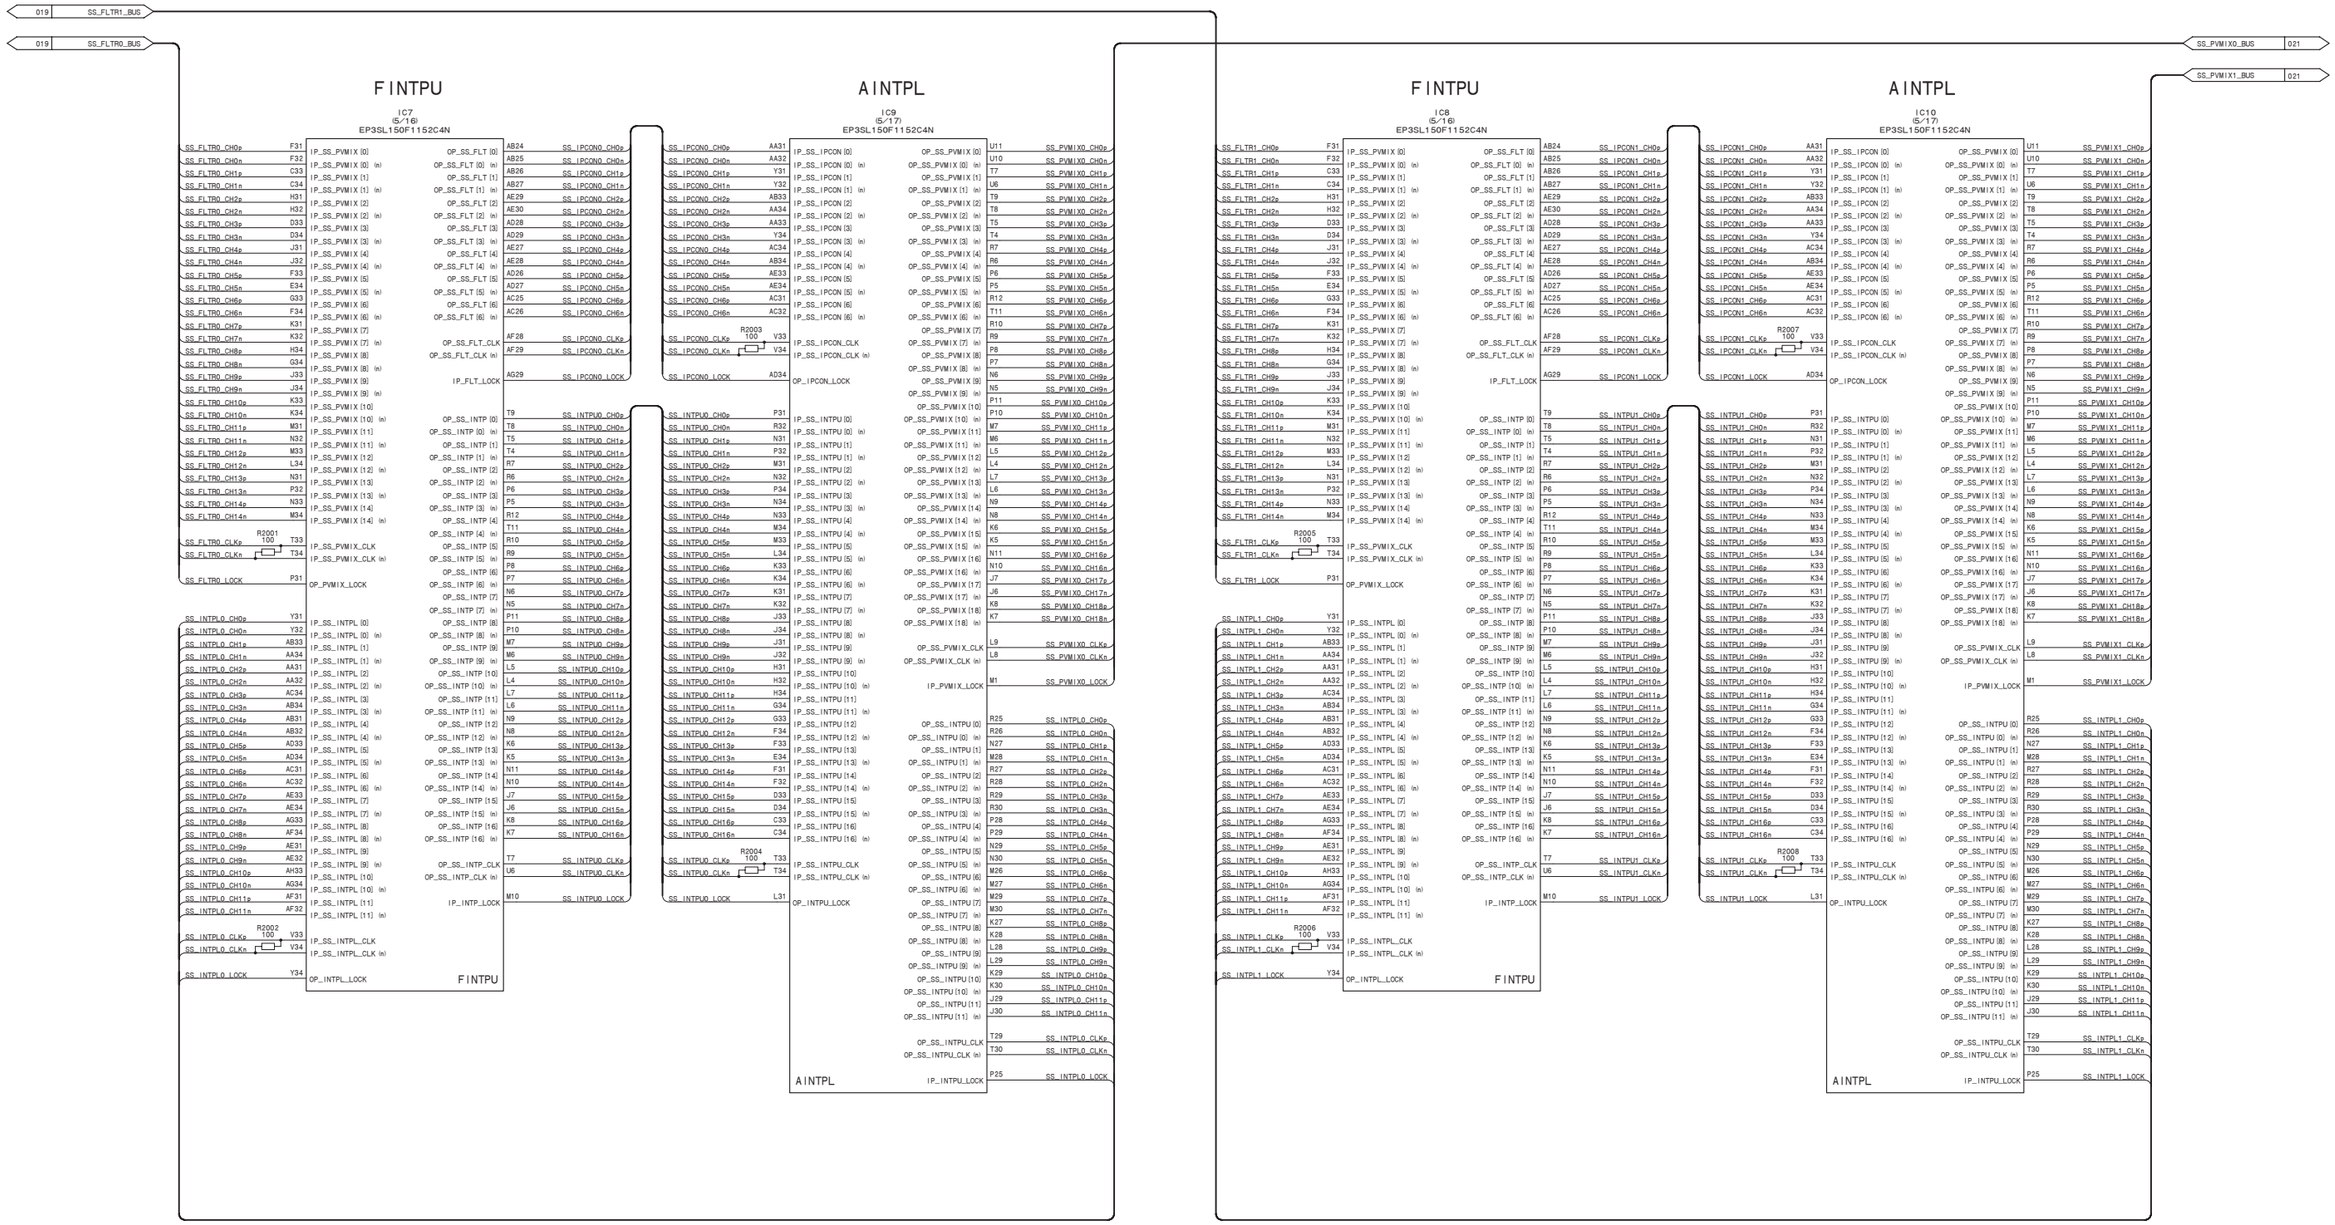
019 SS_FLTR1_BUS
019 SS_FLTR0_BUS
SS_PVMIX0_BUS 021
SS_PVMIX1_BUS 021
F INTPU
IC7 (5/16) EP3SL150F1152C4N
A INTPL
IC9 (5/17) EP3SL150F1152C4N
F INTPU
IC8 (5/16) EP3SL150F1152C4N
A INTPL
IC10 (5/17) EP3SL150F1152C4N
R2001 100
R2002 100
R2003 100
R2004 100
R2005 100
R2006 100
R2007 100
R2008 100

DVP-53 (21/54)
SUFFIX: -11

PVMX
IC11
(6/17)
EP3SL150F1152C4N

VMIX
IC12
(5/16)
EP3SL150F1152C4N

V OUT
IC5
(4/14)
XC5VLX50T-1FFG665C (S1)

MFSDI

MON OUT
IC6
(4/14)
XC5VLX50T-1FFG665C (S1)

MFSDI

VMIX
IC12
(6/16)
EP3SL150F1152C4N

4-390

DVP-53 (21/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_21

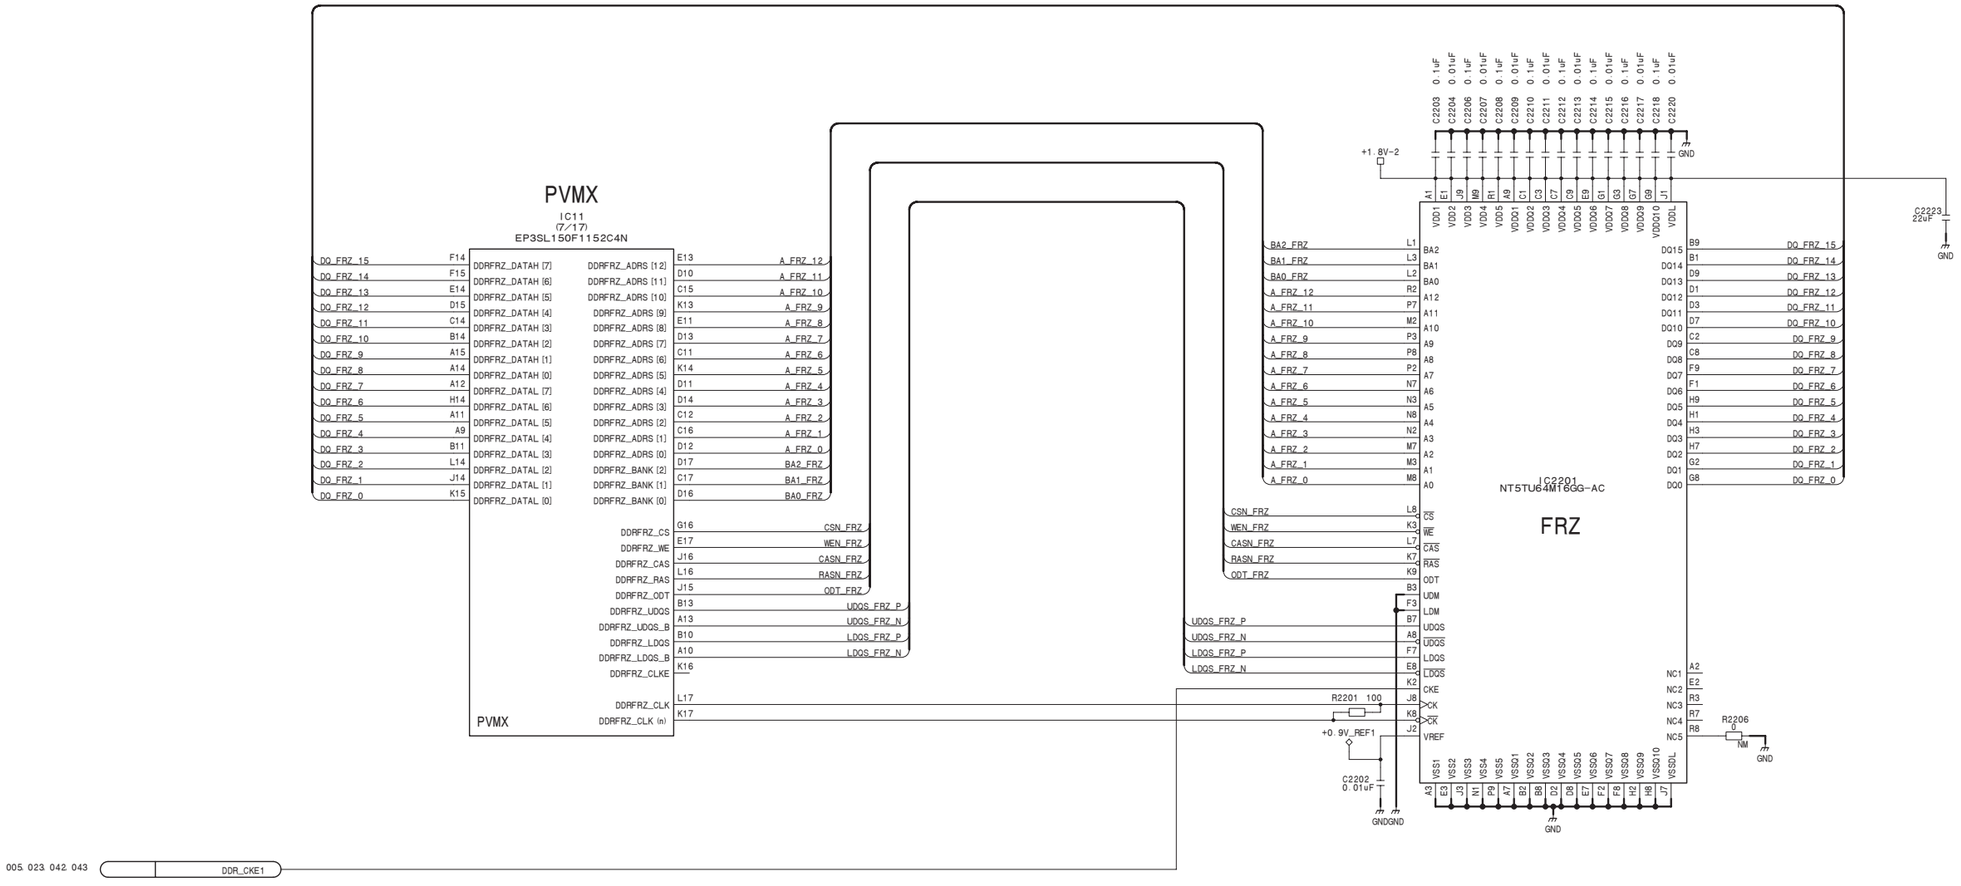

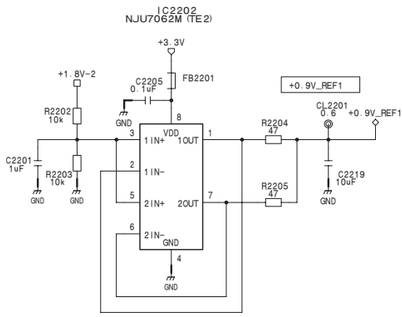



DVP-53 (22/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_22

DVP-53 (23/54)
SUFFIX: -11

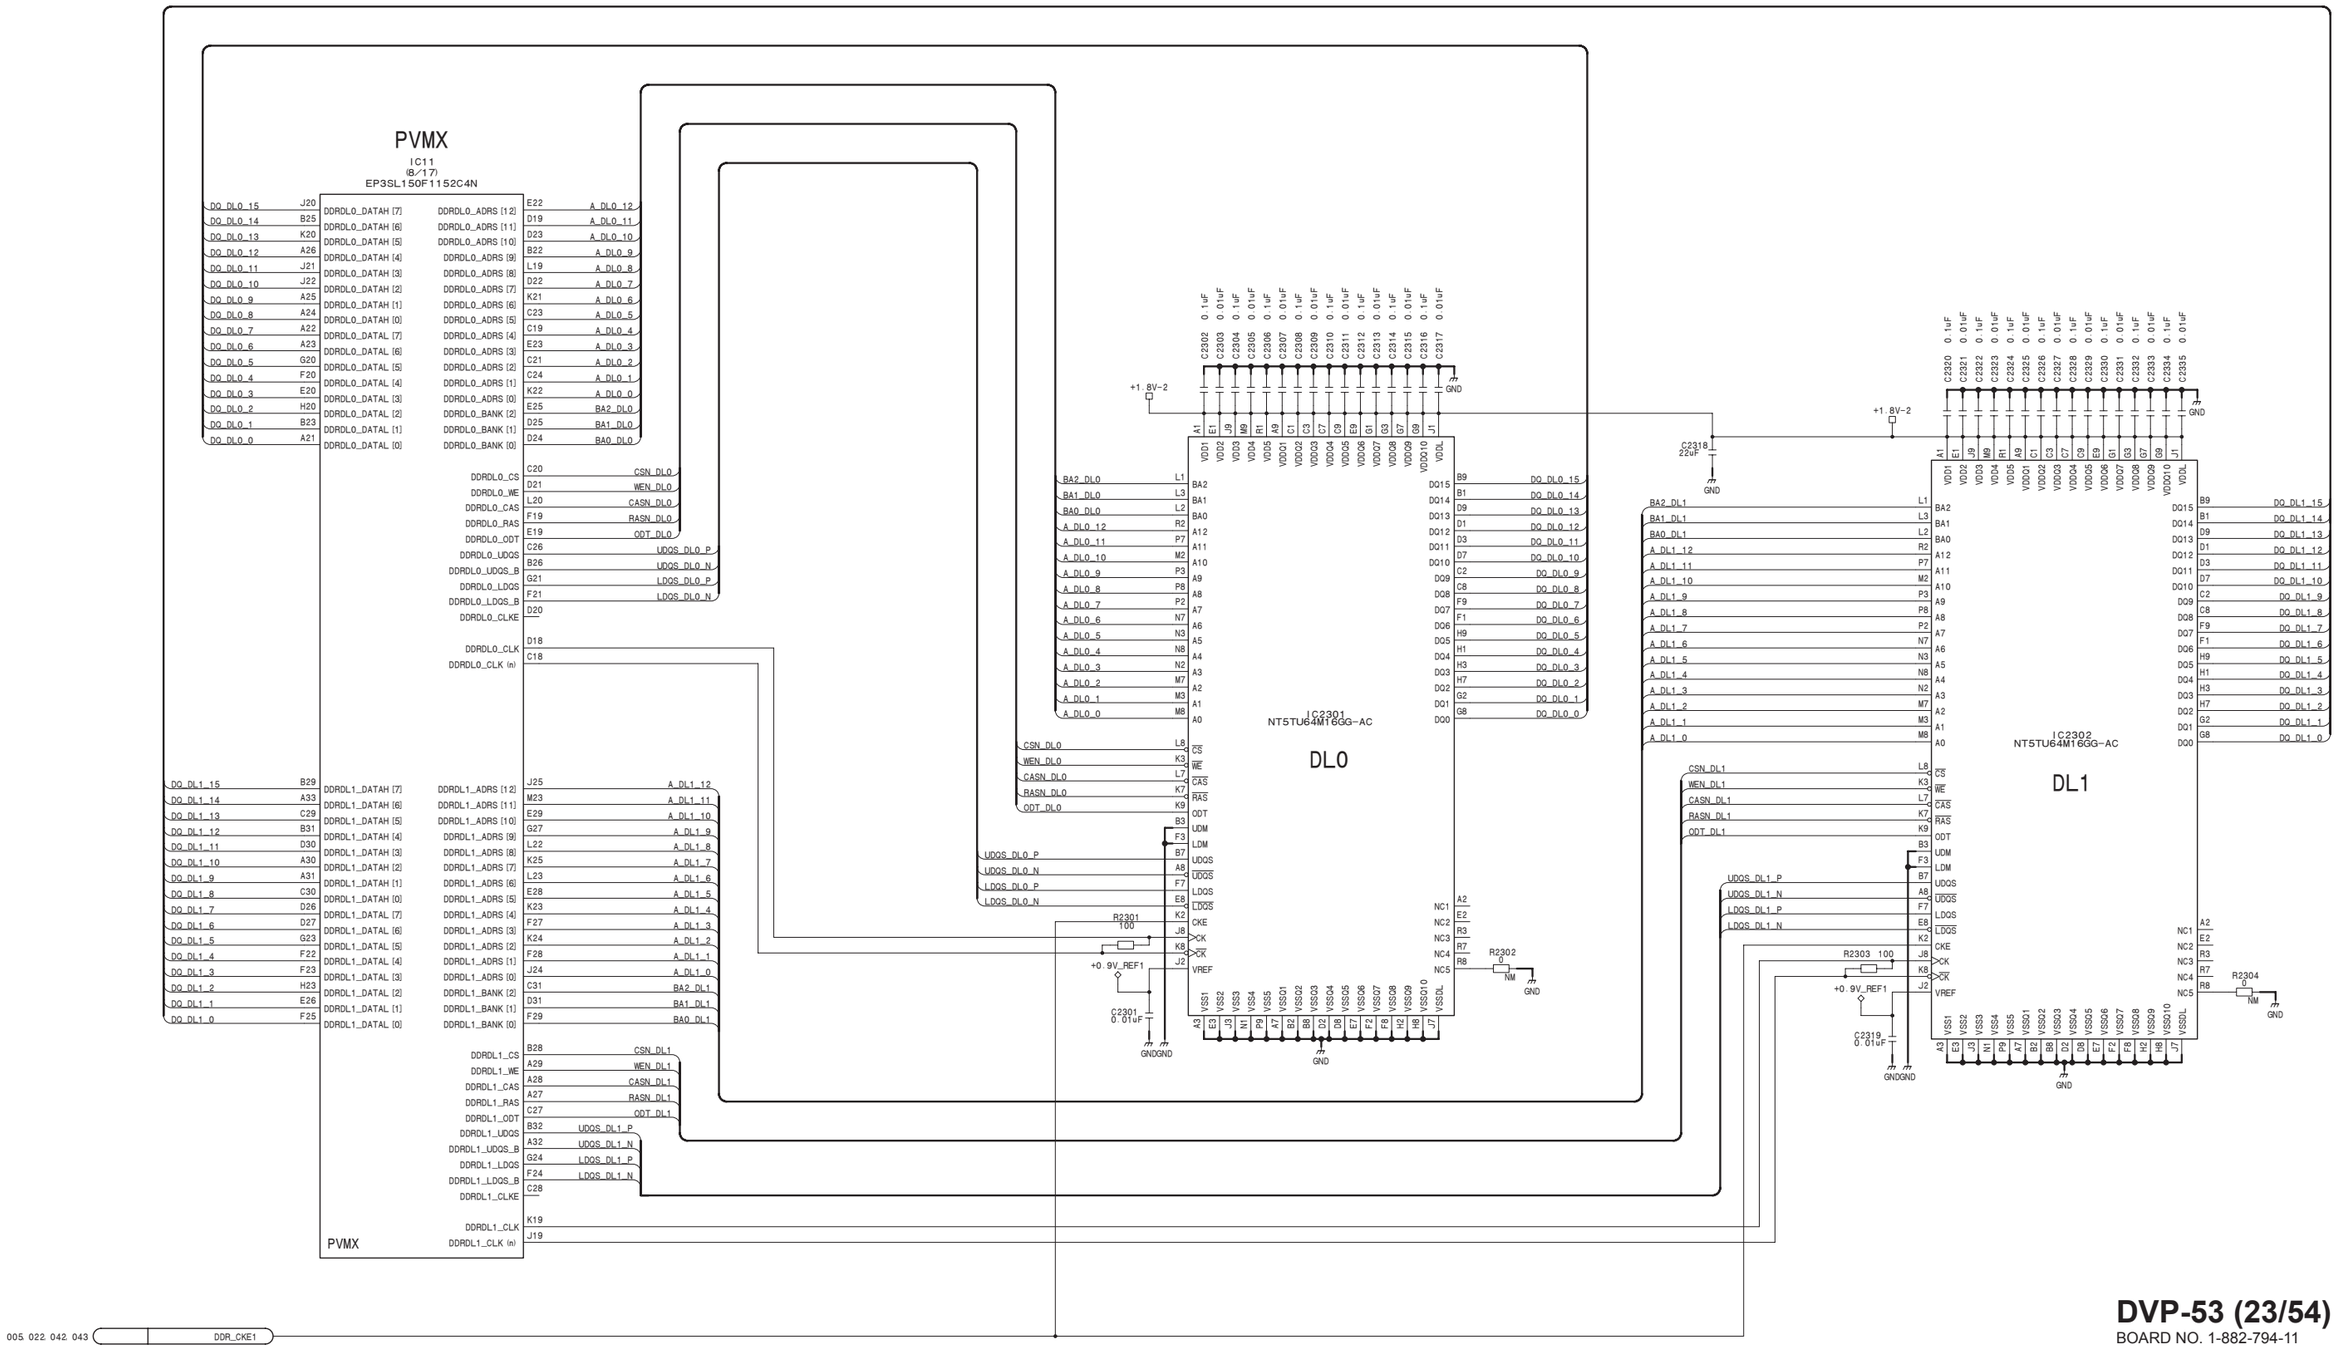

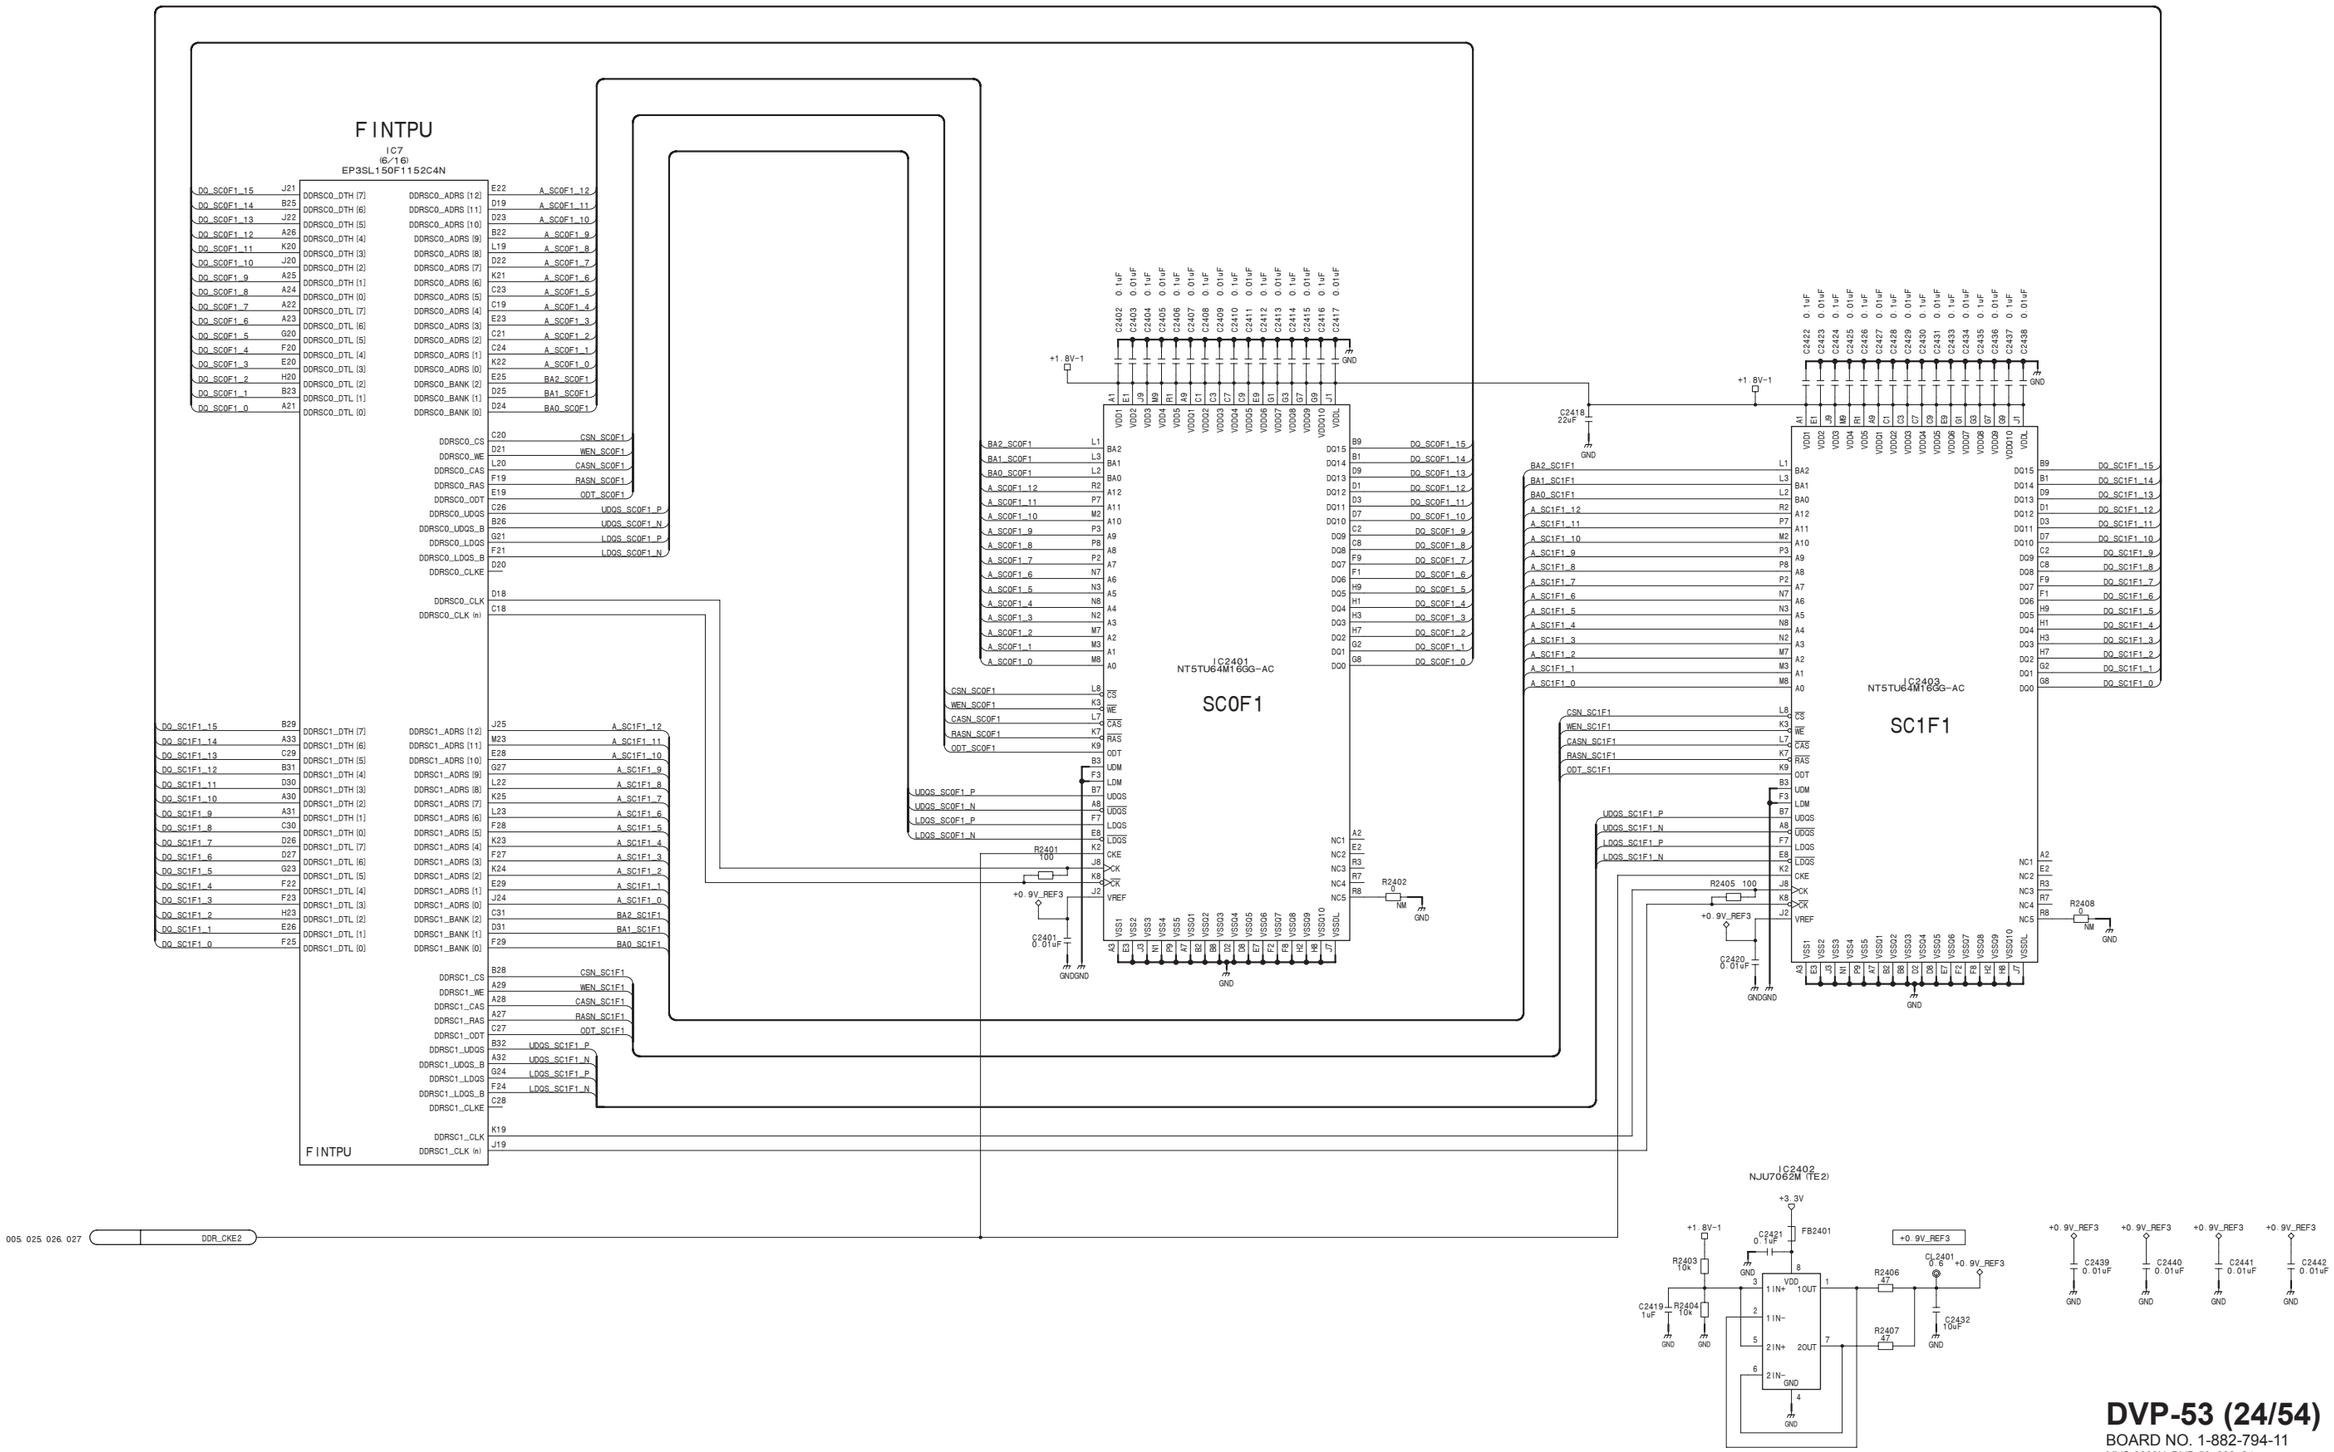

DVP-53 (24/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_24

DVP-53 (25/54)
SUFFIX: -11

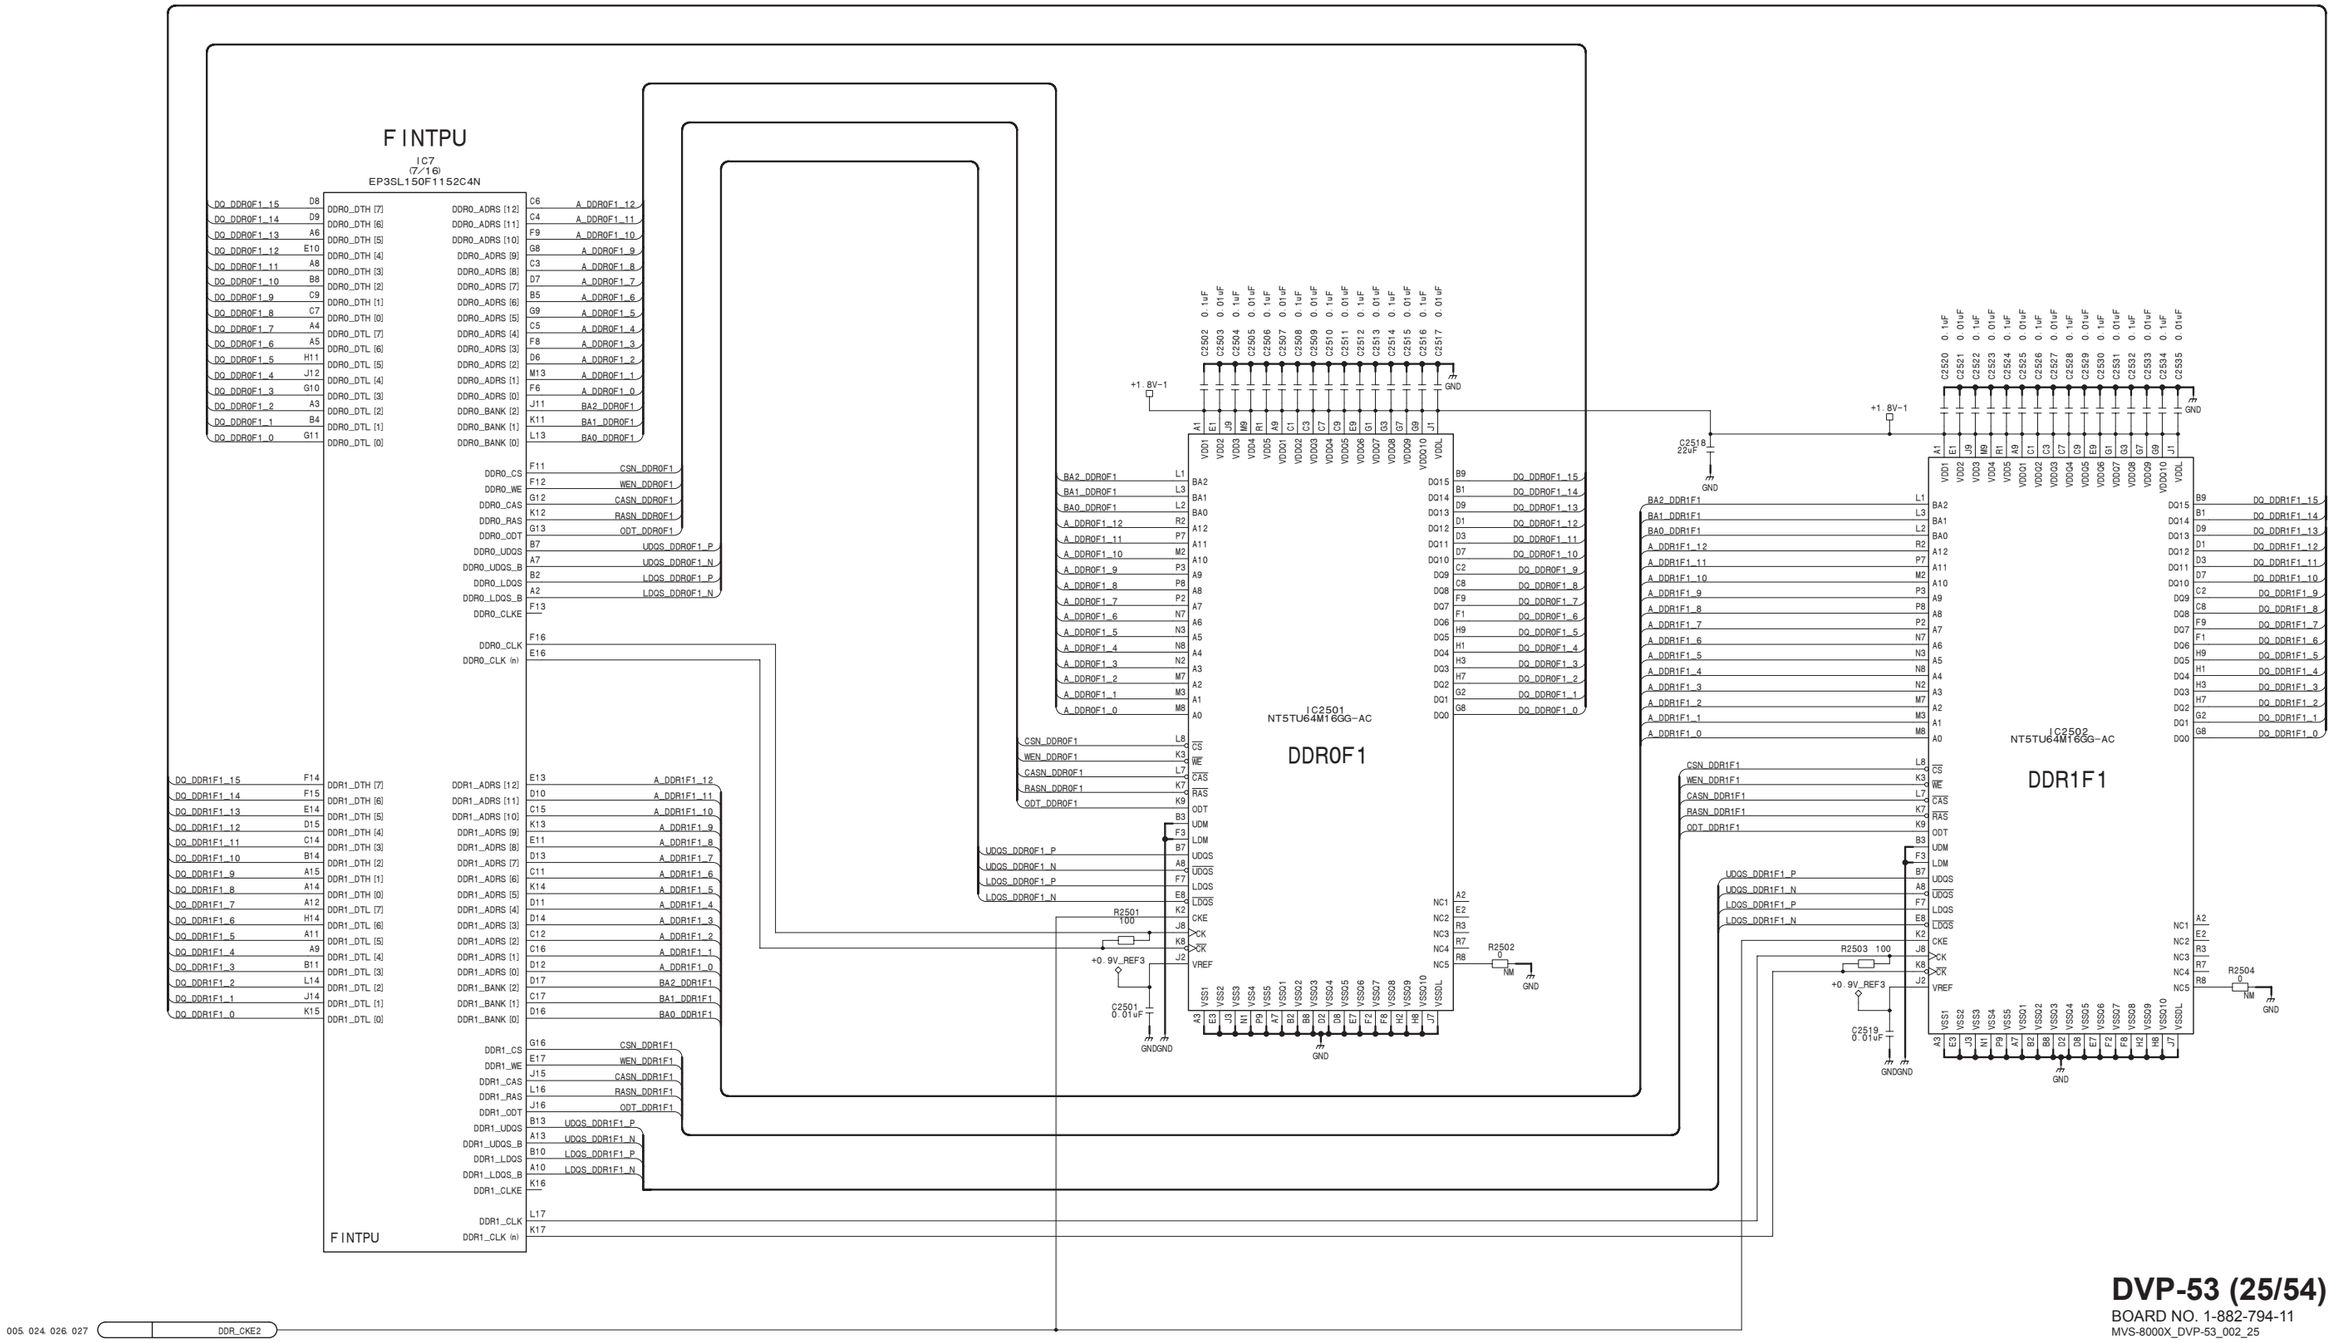

4-394

DVP-53 (25/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_25

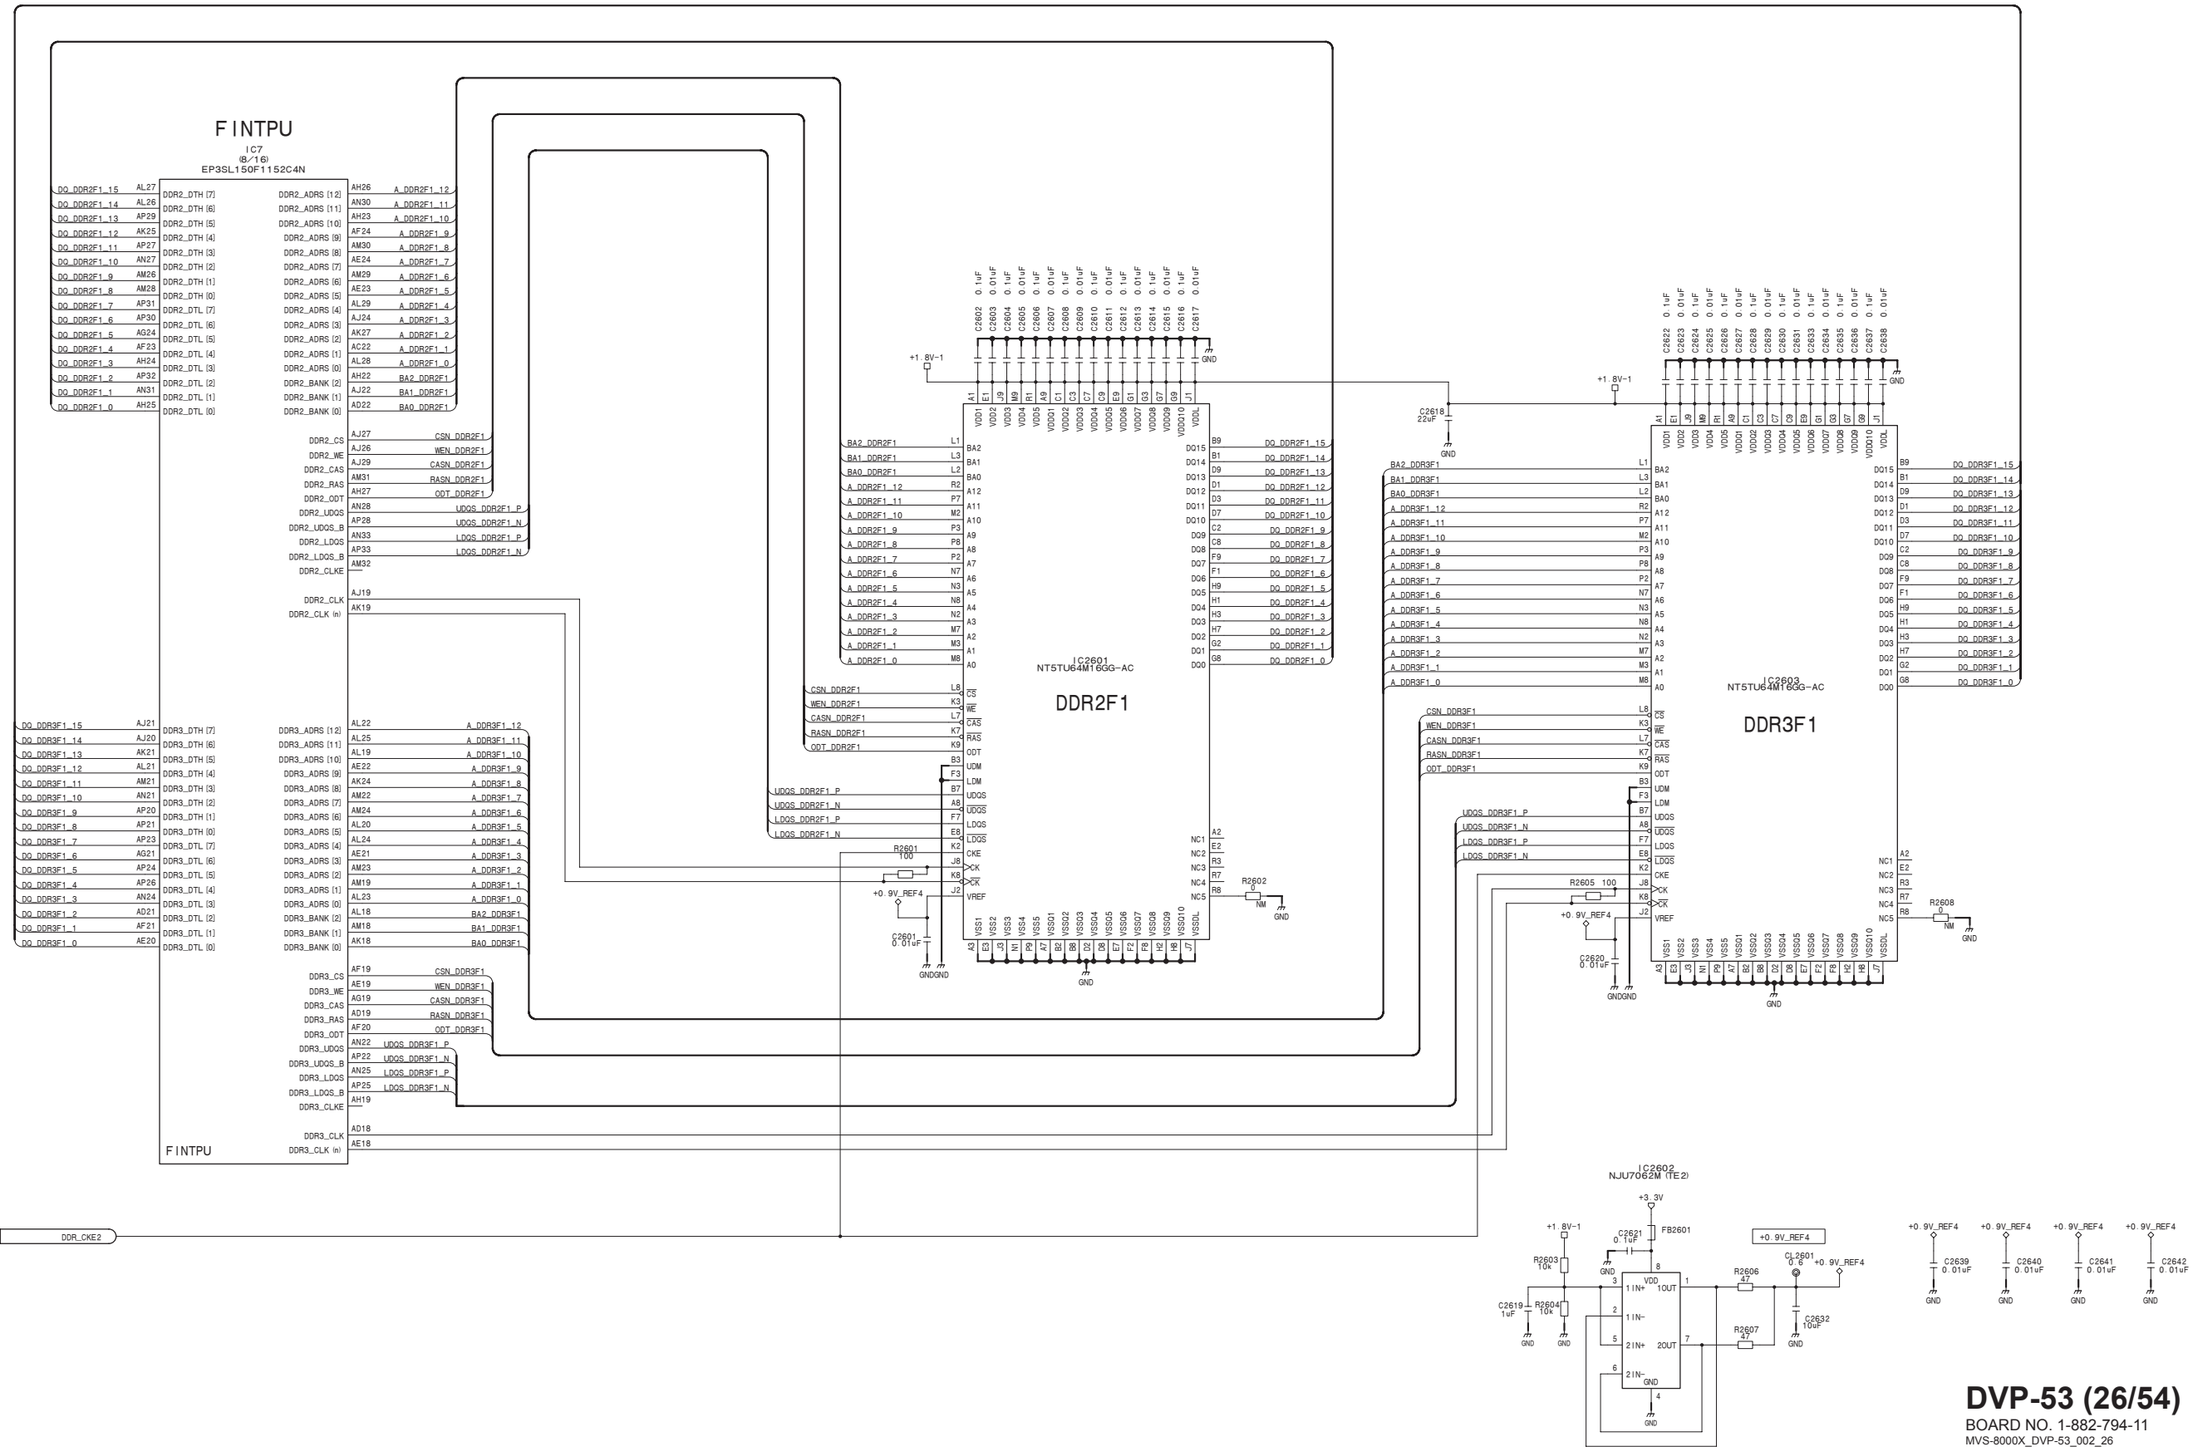

DVP-53 (26/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_26

DVP-53 (27/54)
SUFFIX: -11

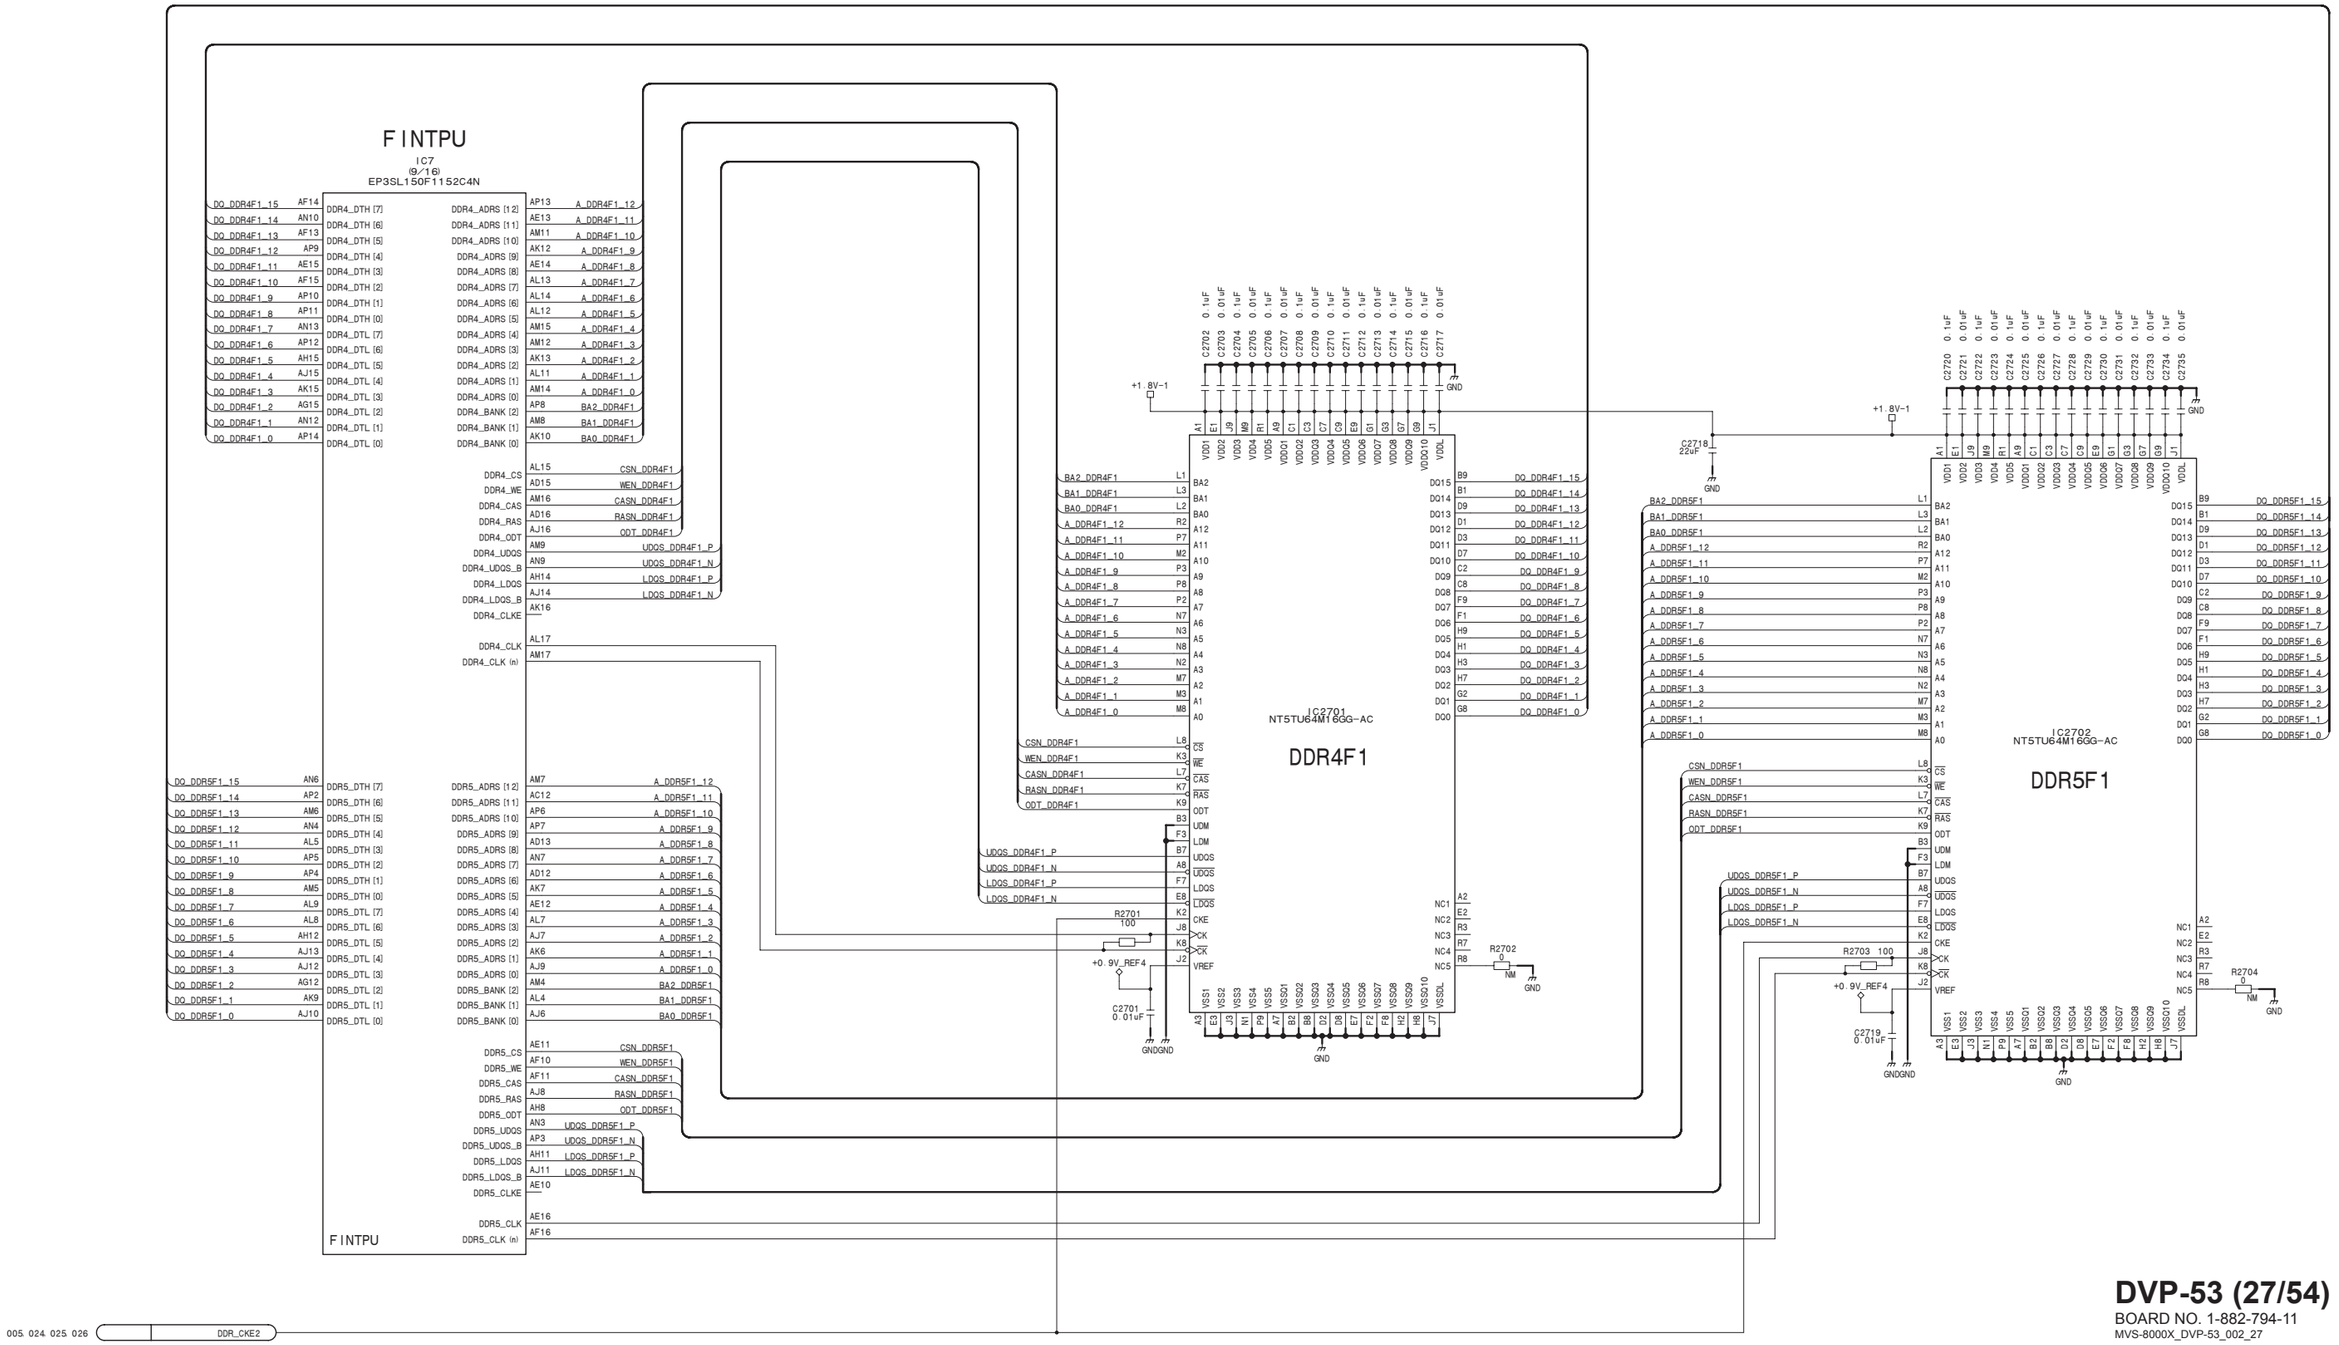

DVP-53 (27/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_27

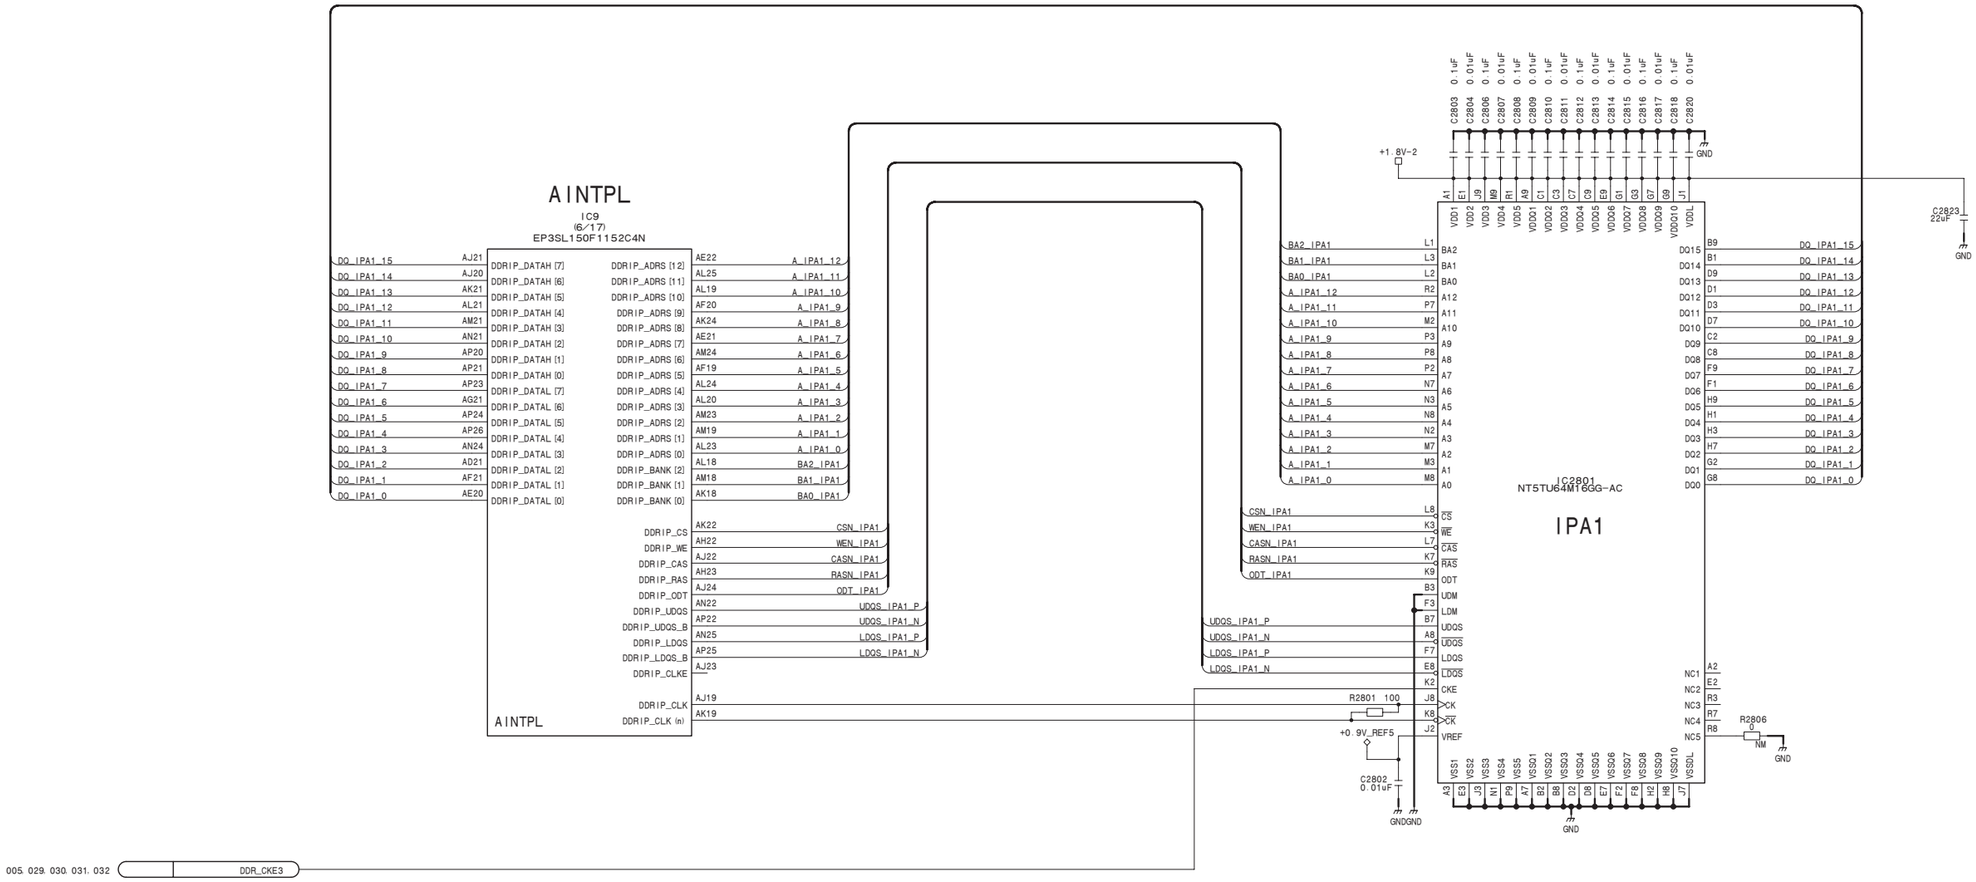

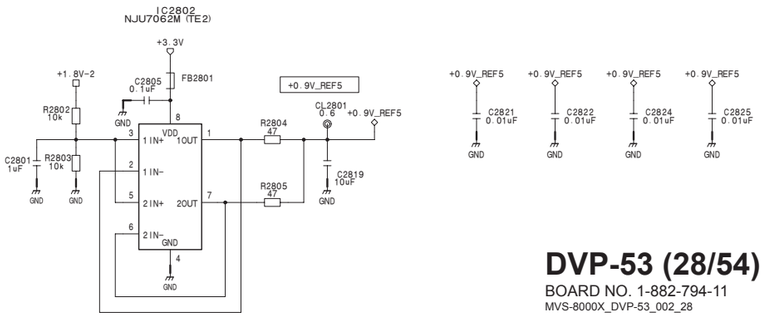

DVP-53 (28/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_28

DVP-53 (29/54)
SUFFIX: -11

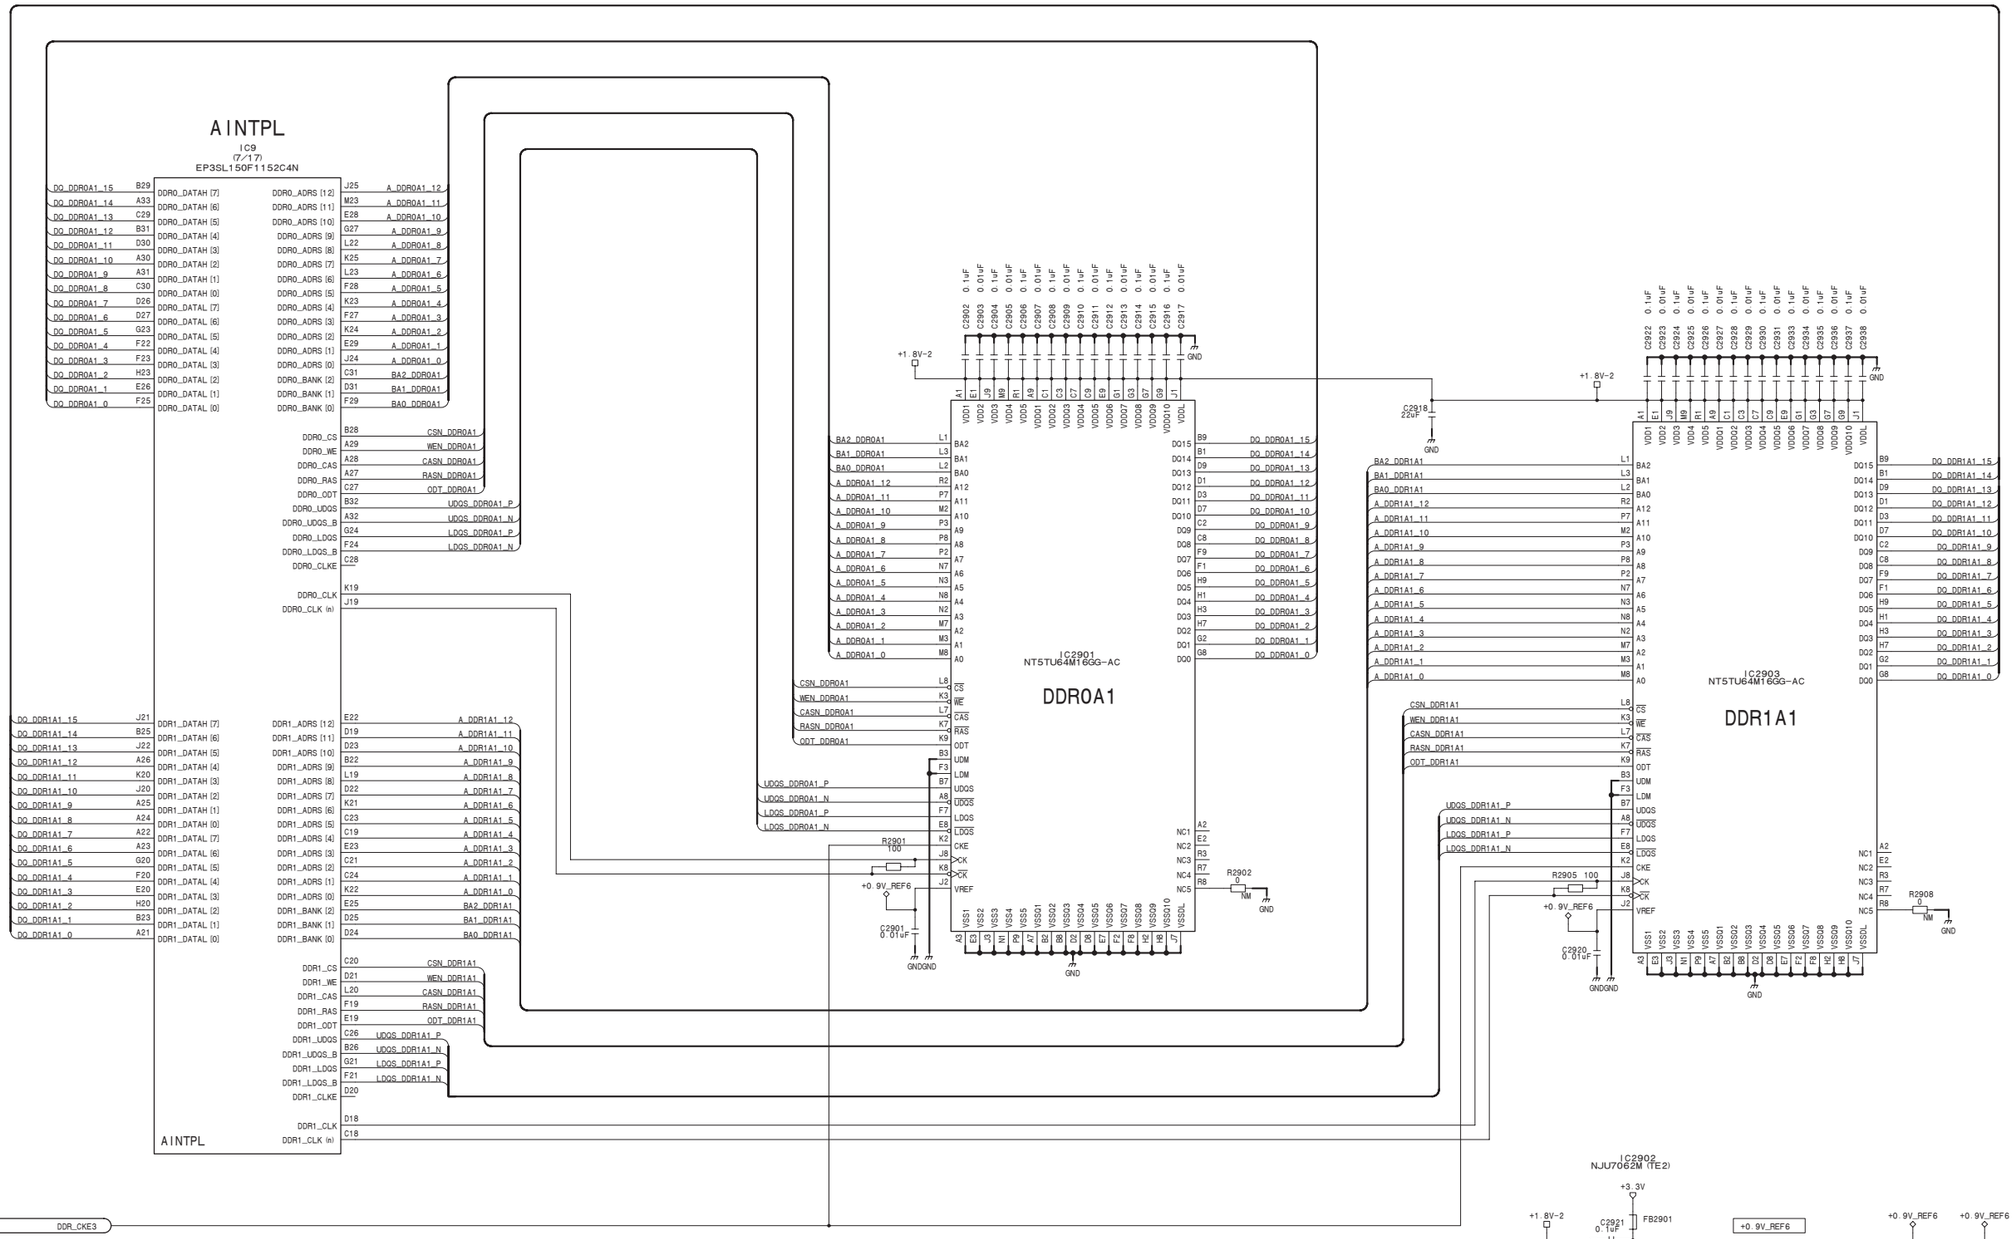

DVP-53 (29/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_29

4-398

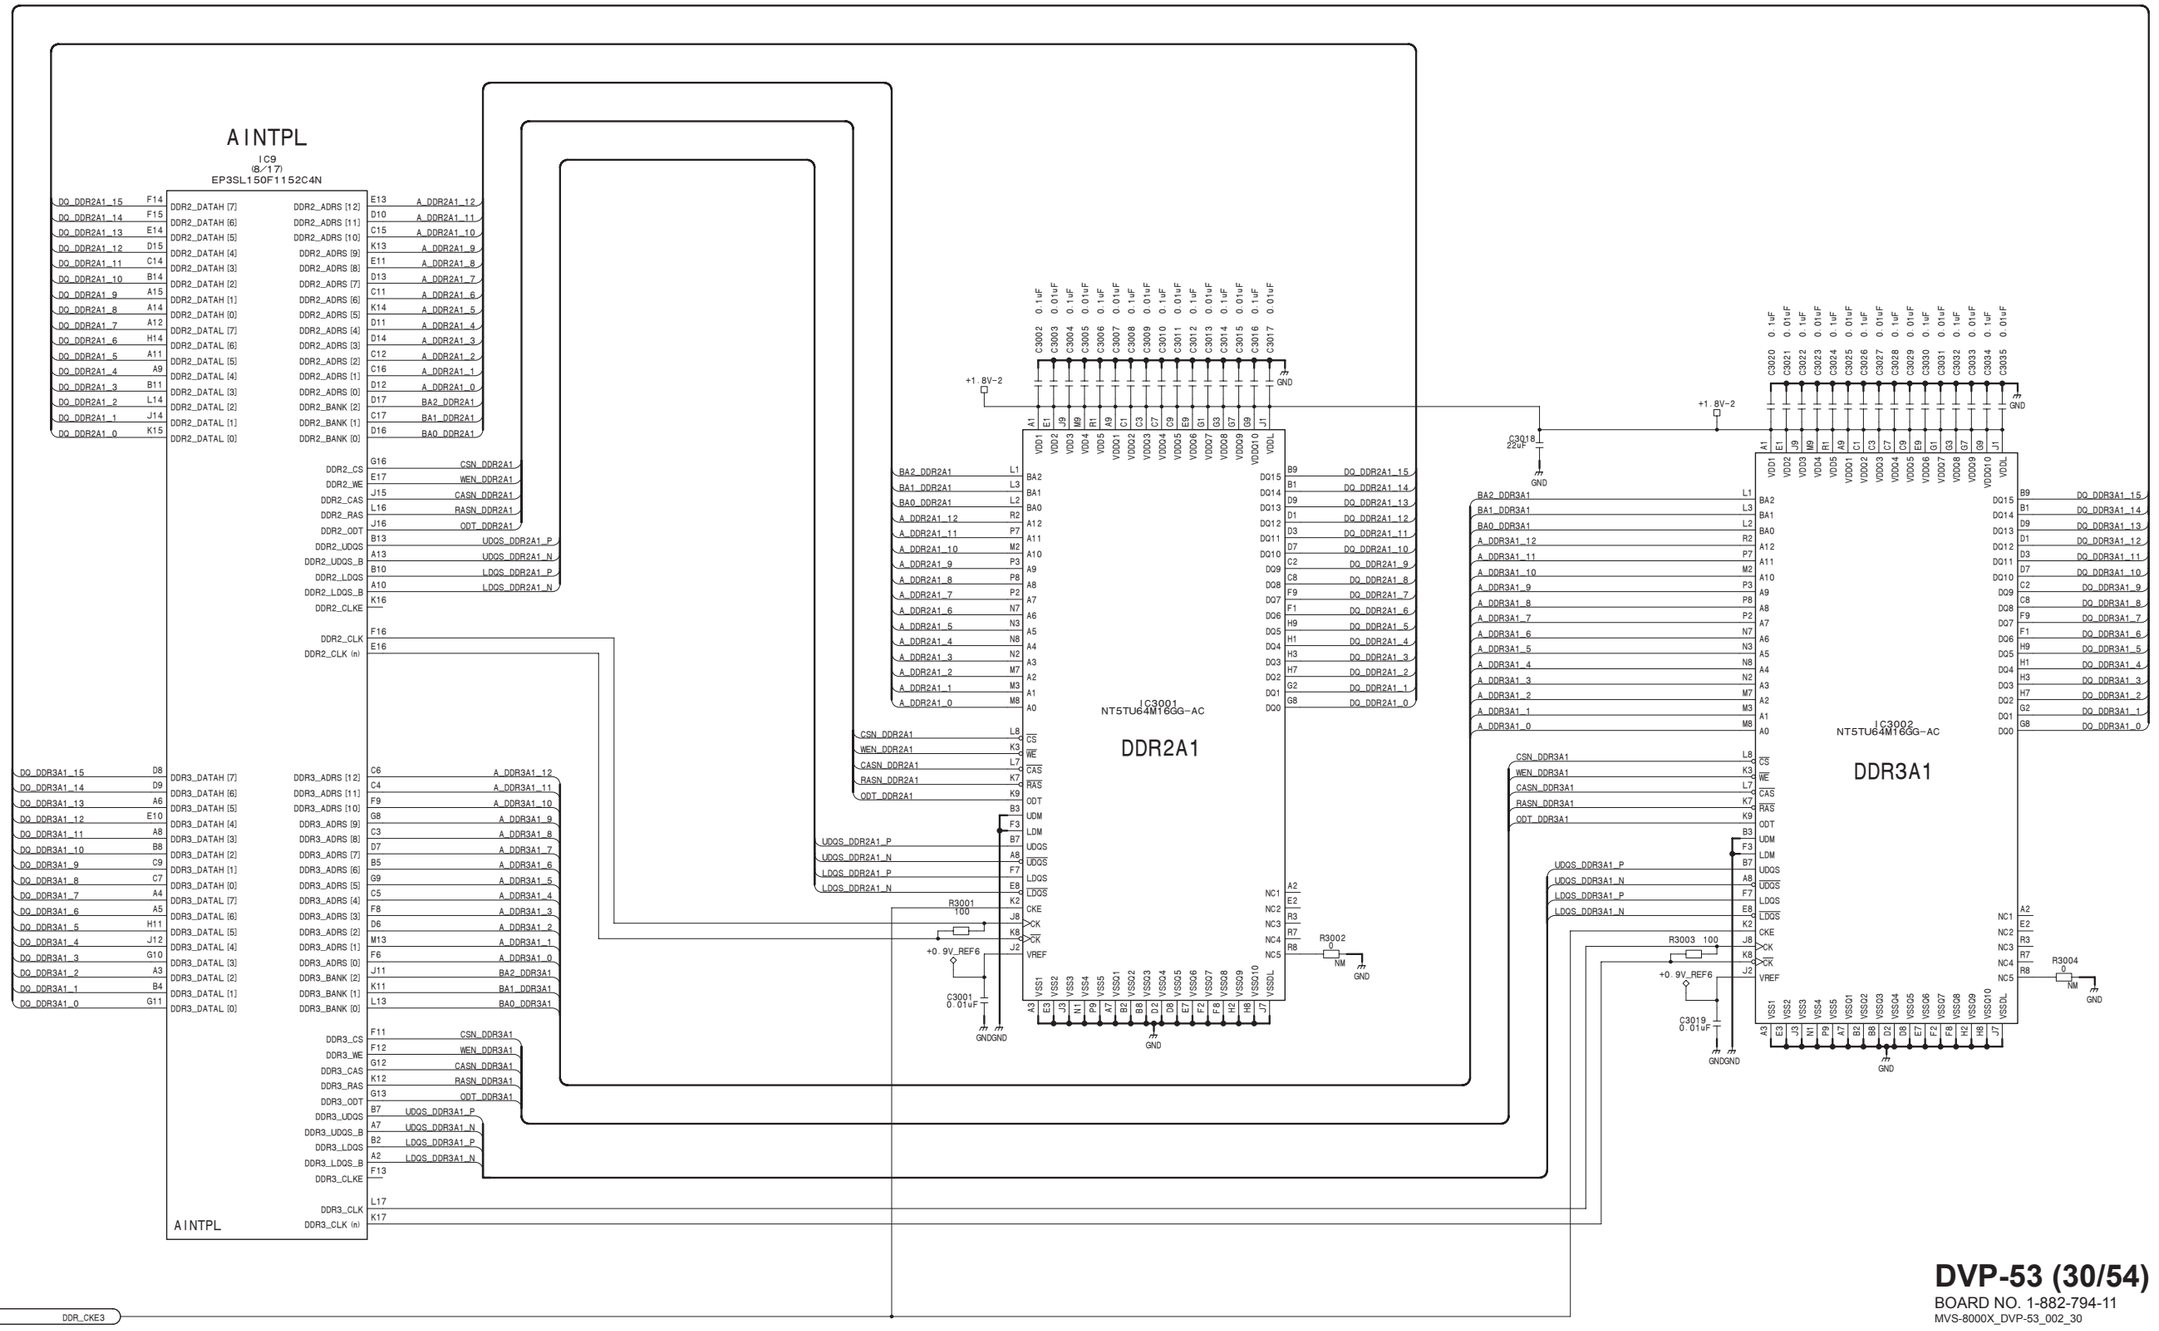

DVP-53 (30/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_30

DVP-53 (31/54)
SUFFIX: -11

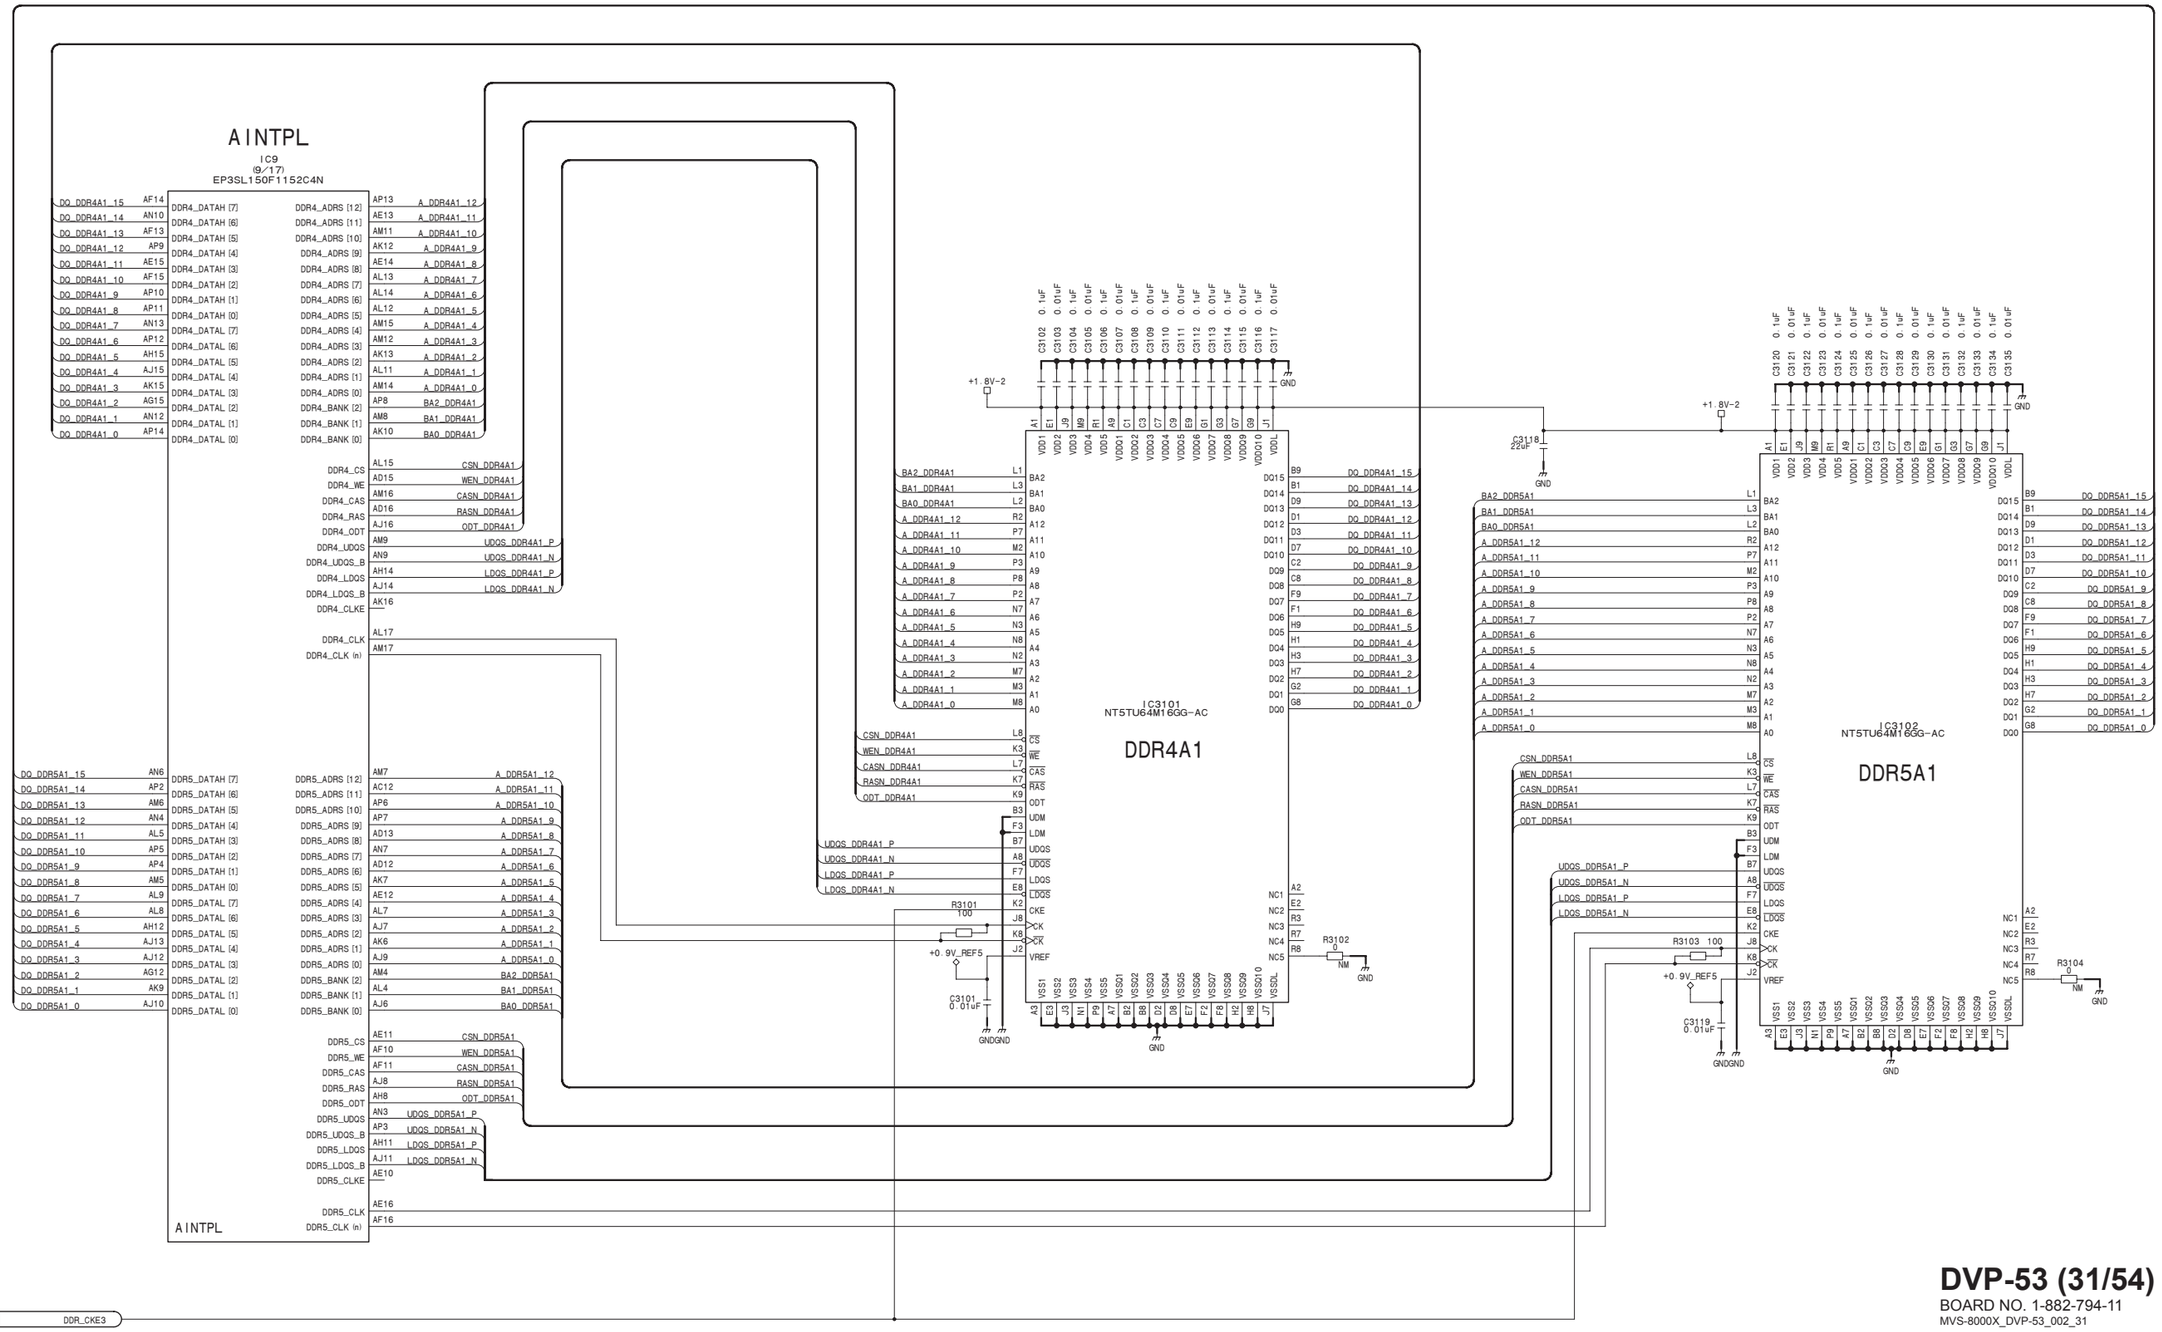

DVP-53 (31/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_31

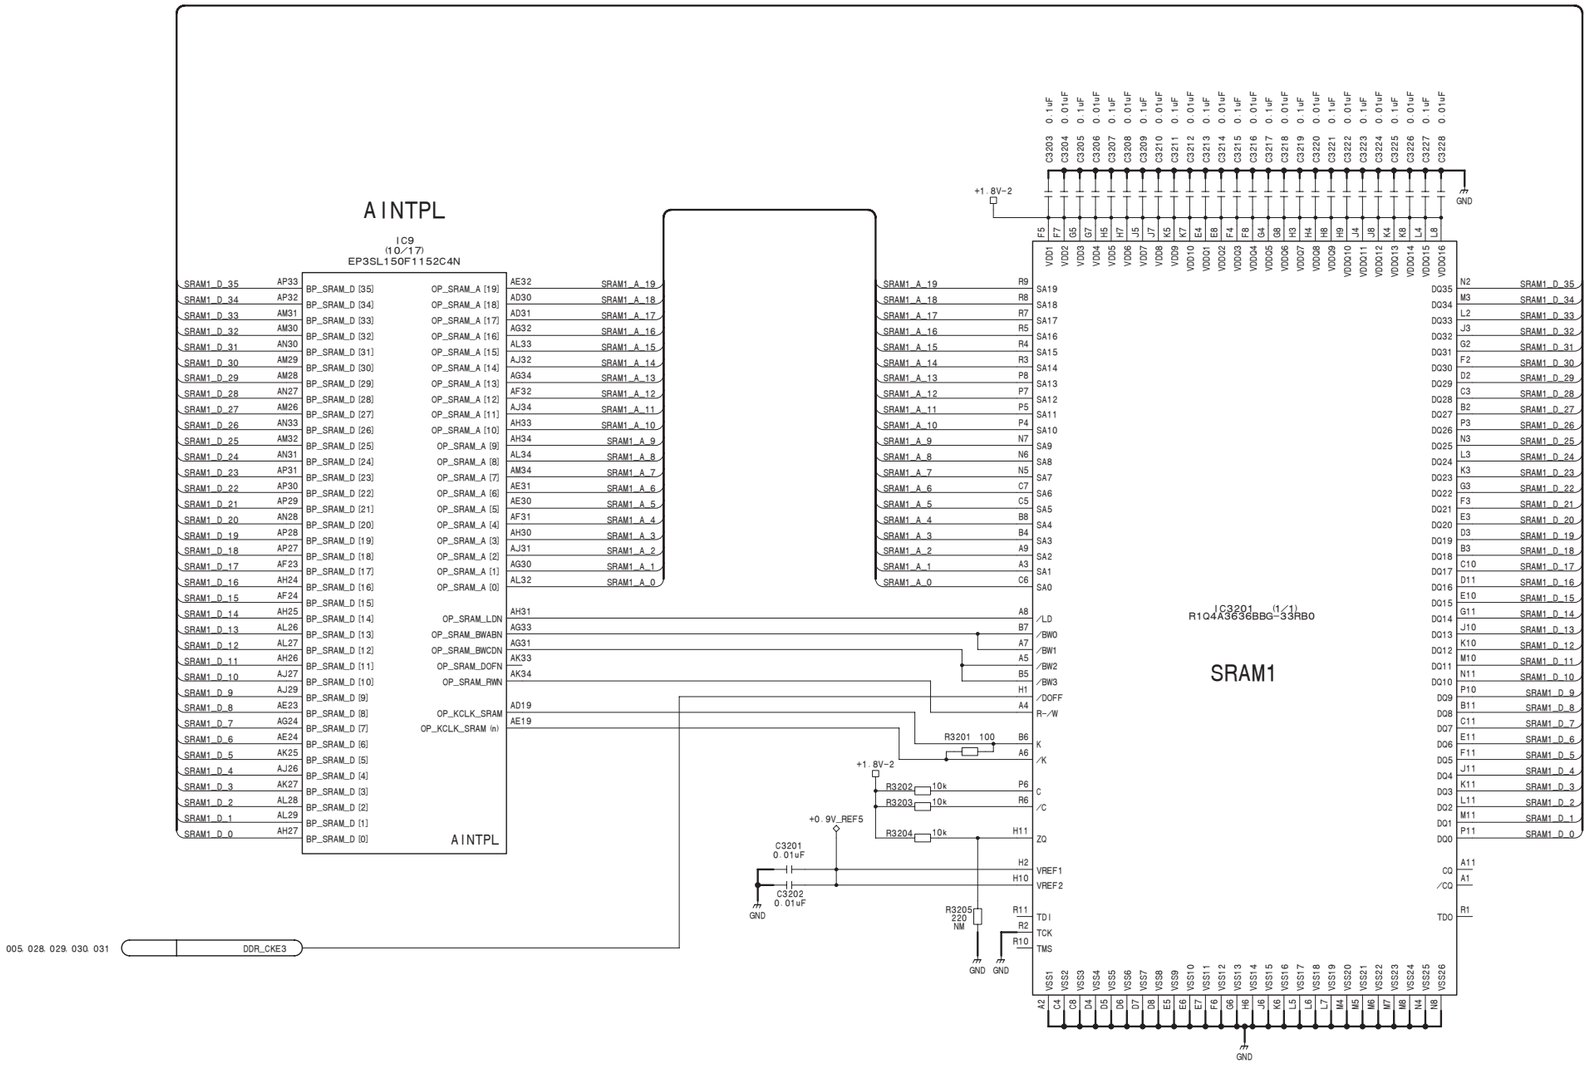

DVP-53 (32/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_32

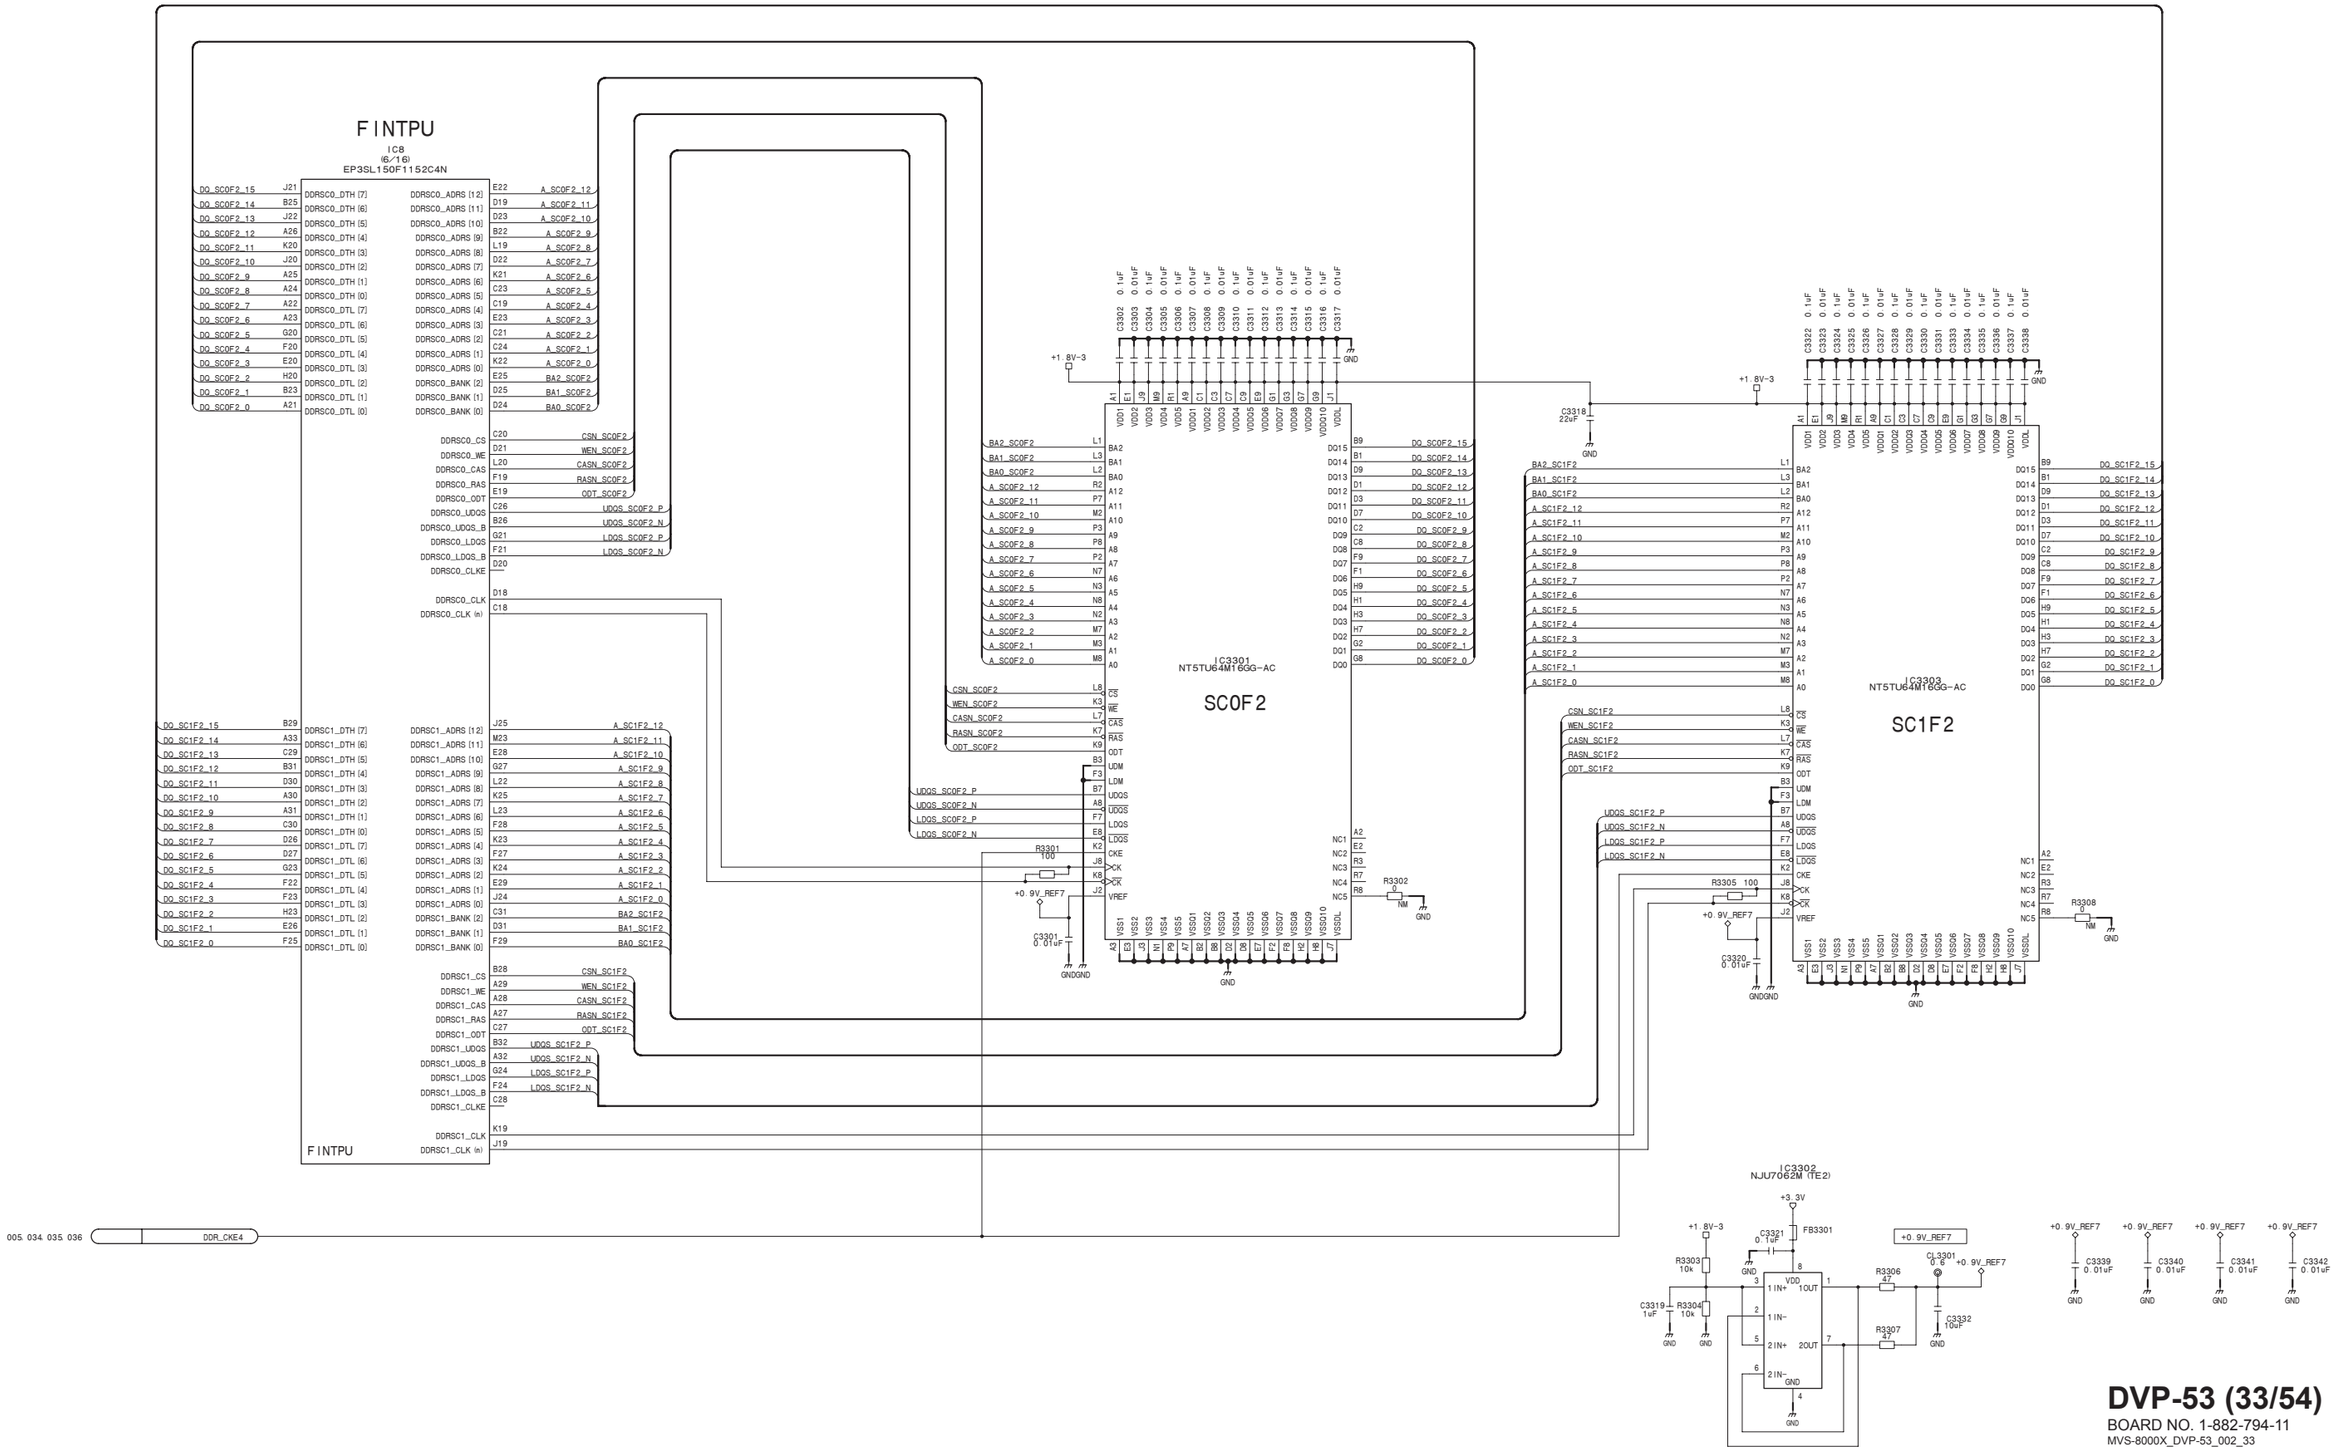

DVP-53 (33/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_33

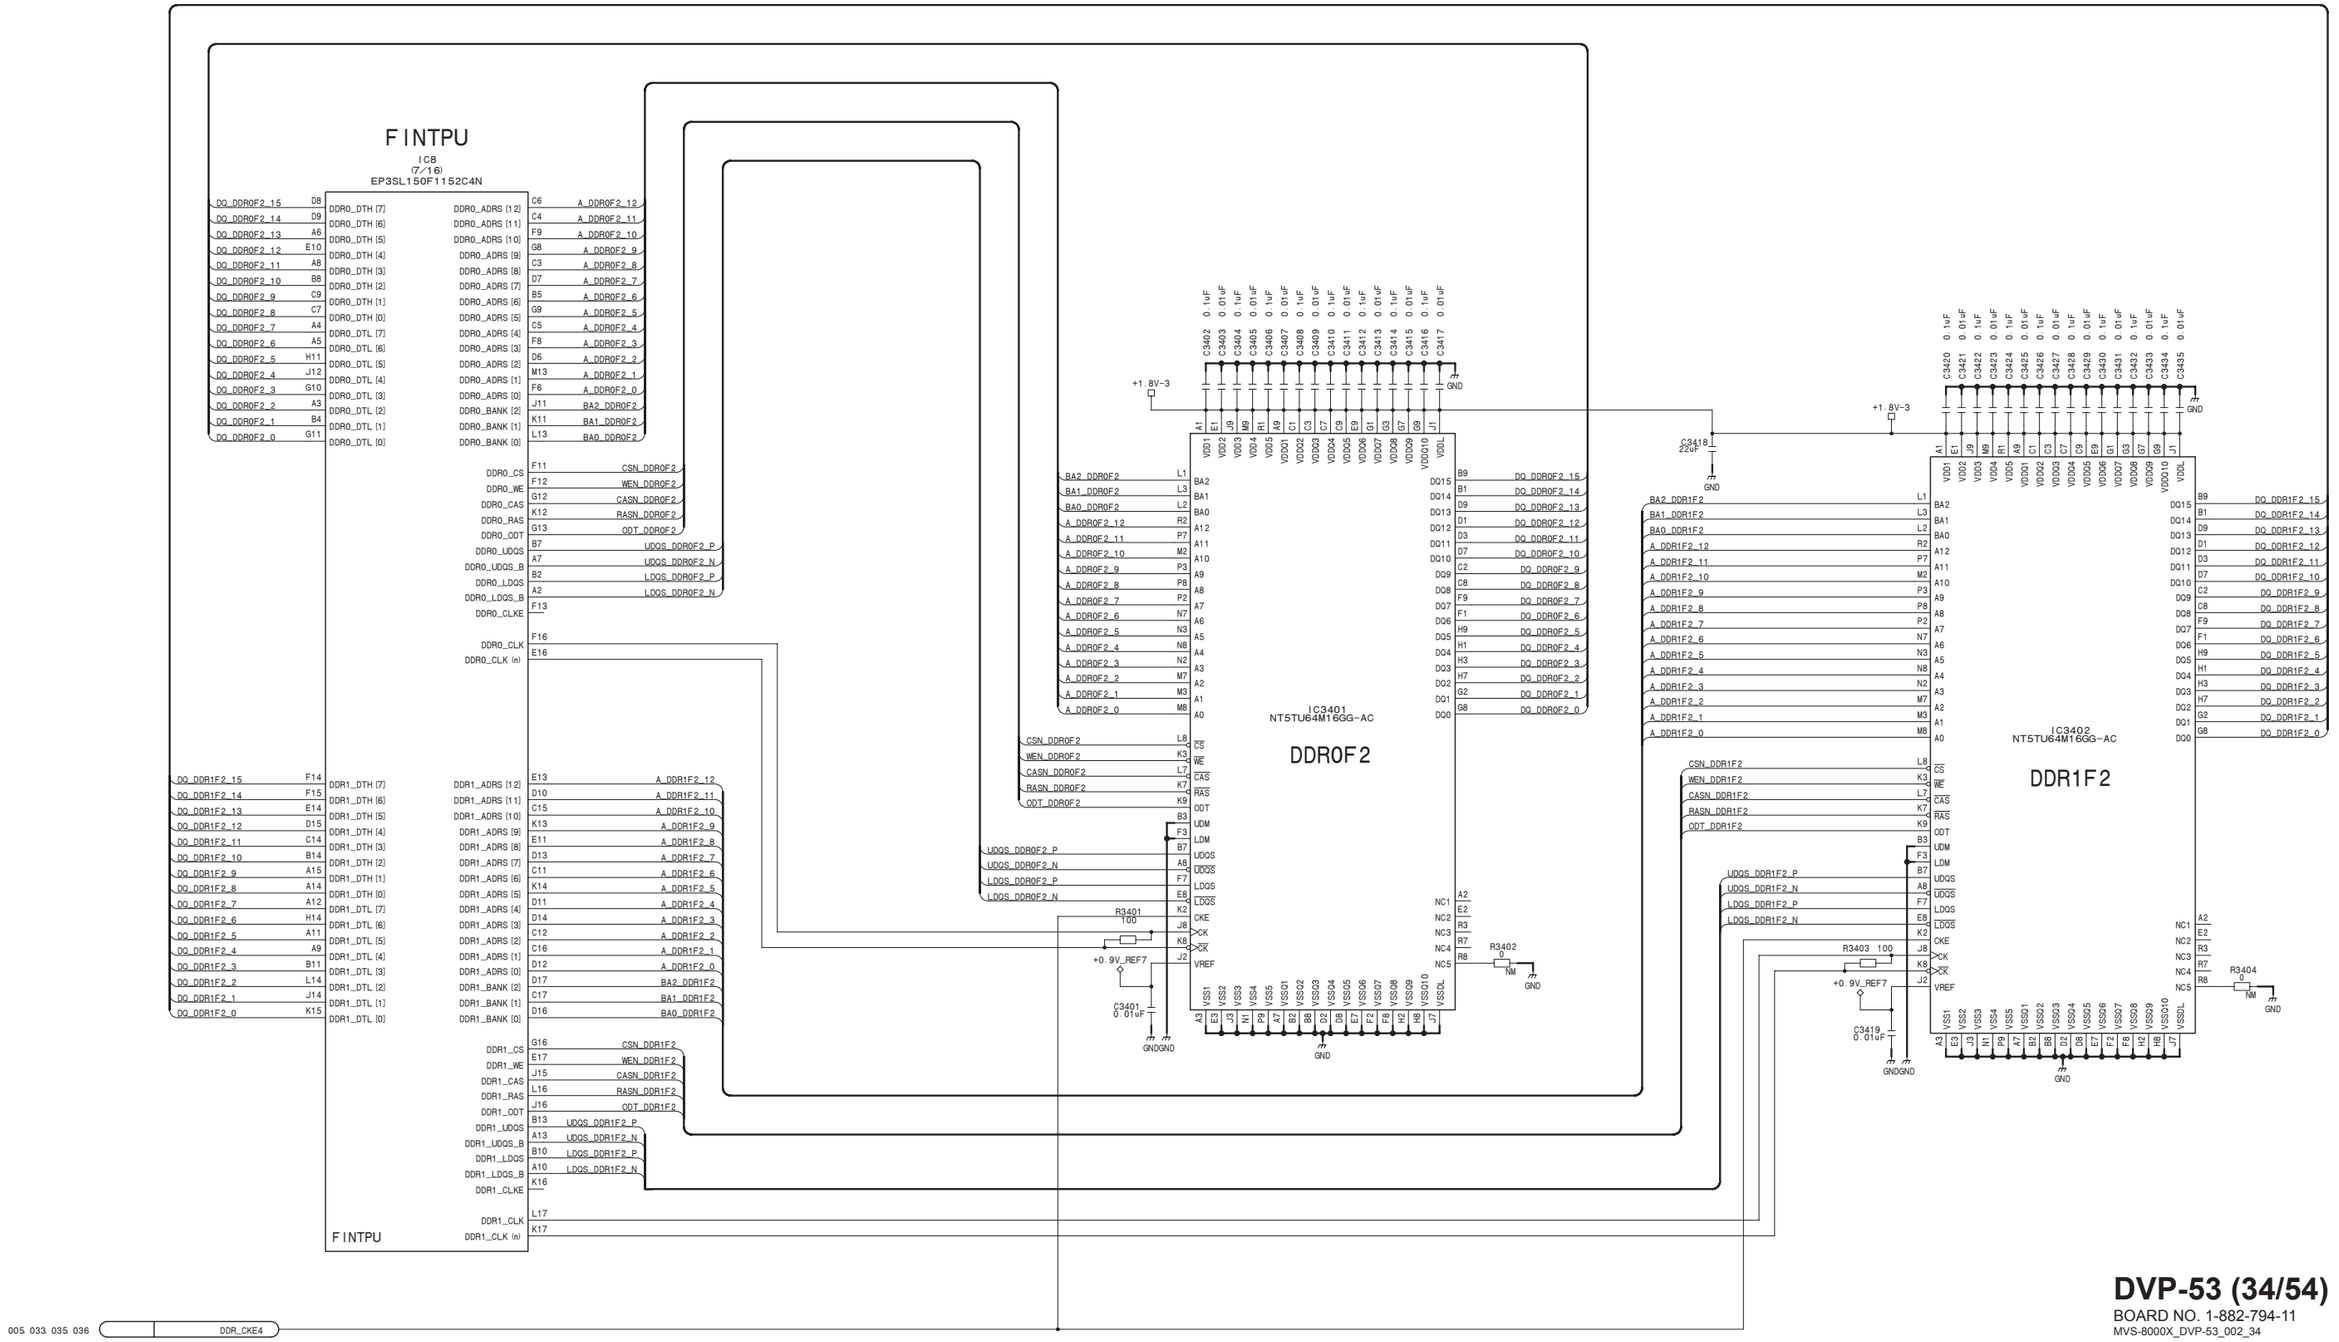

DVP-53 (34/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_34

DVP-53 (35/54)
SUFFIX: -11

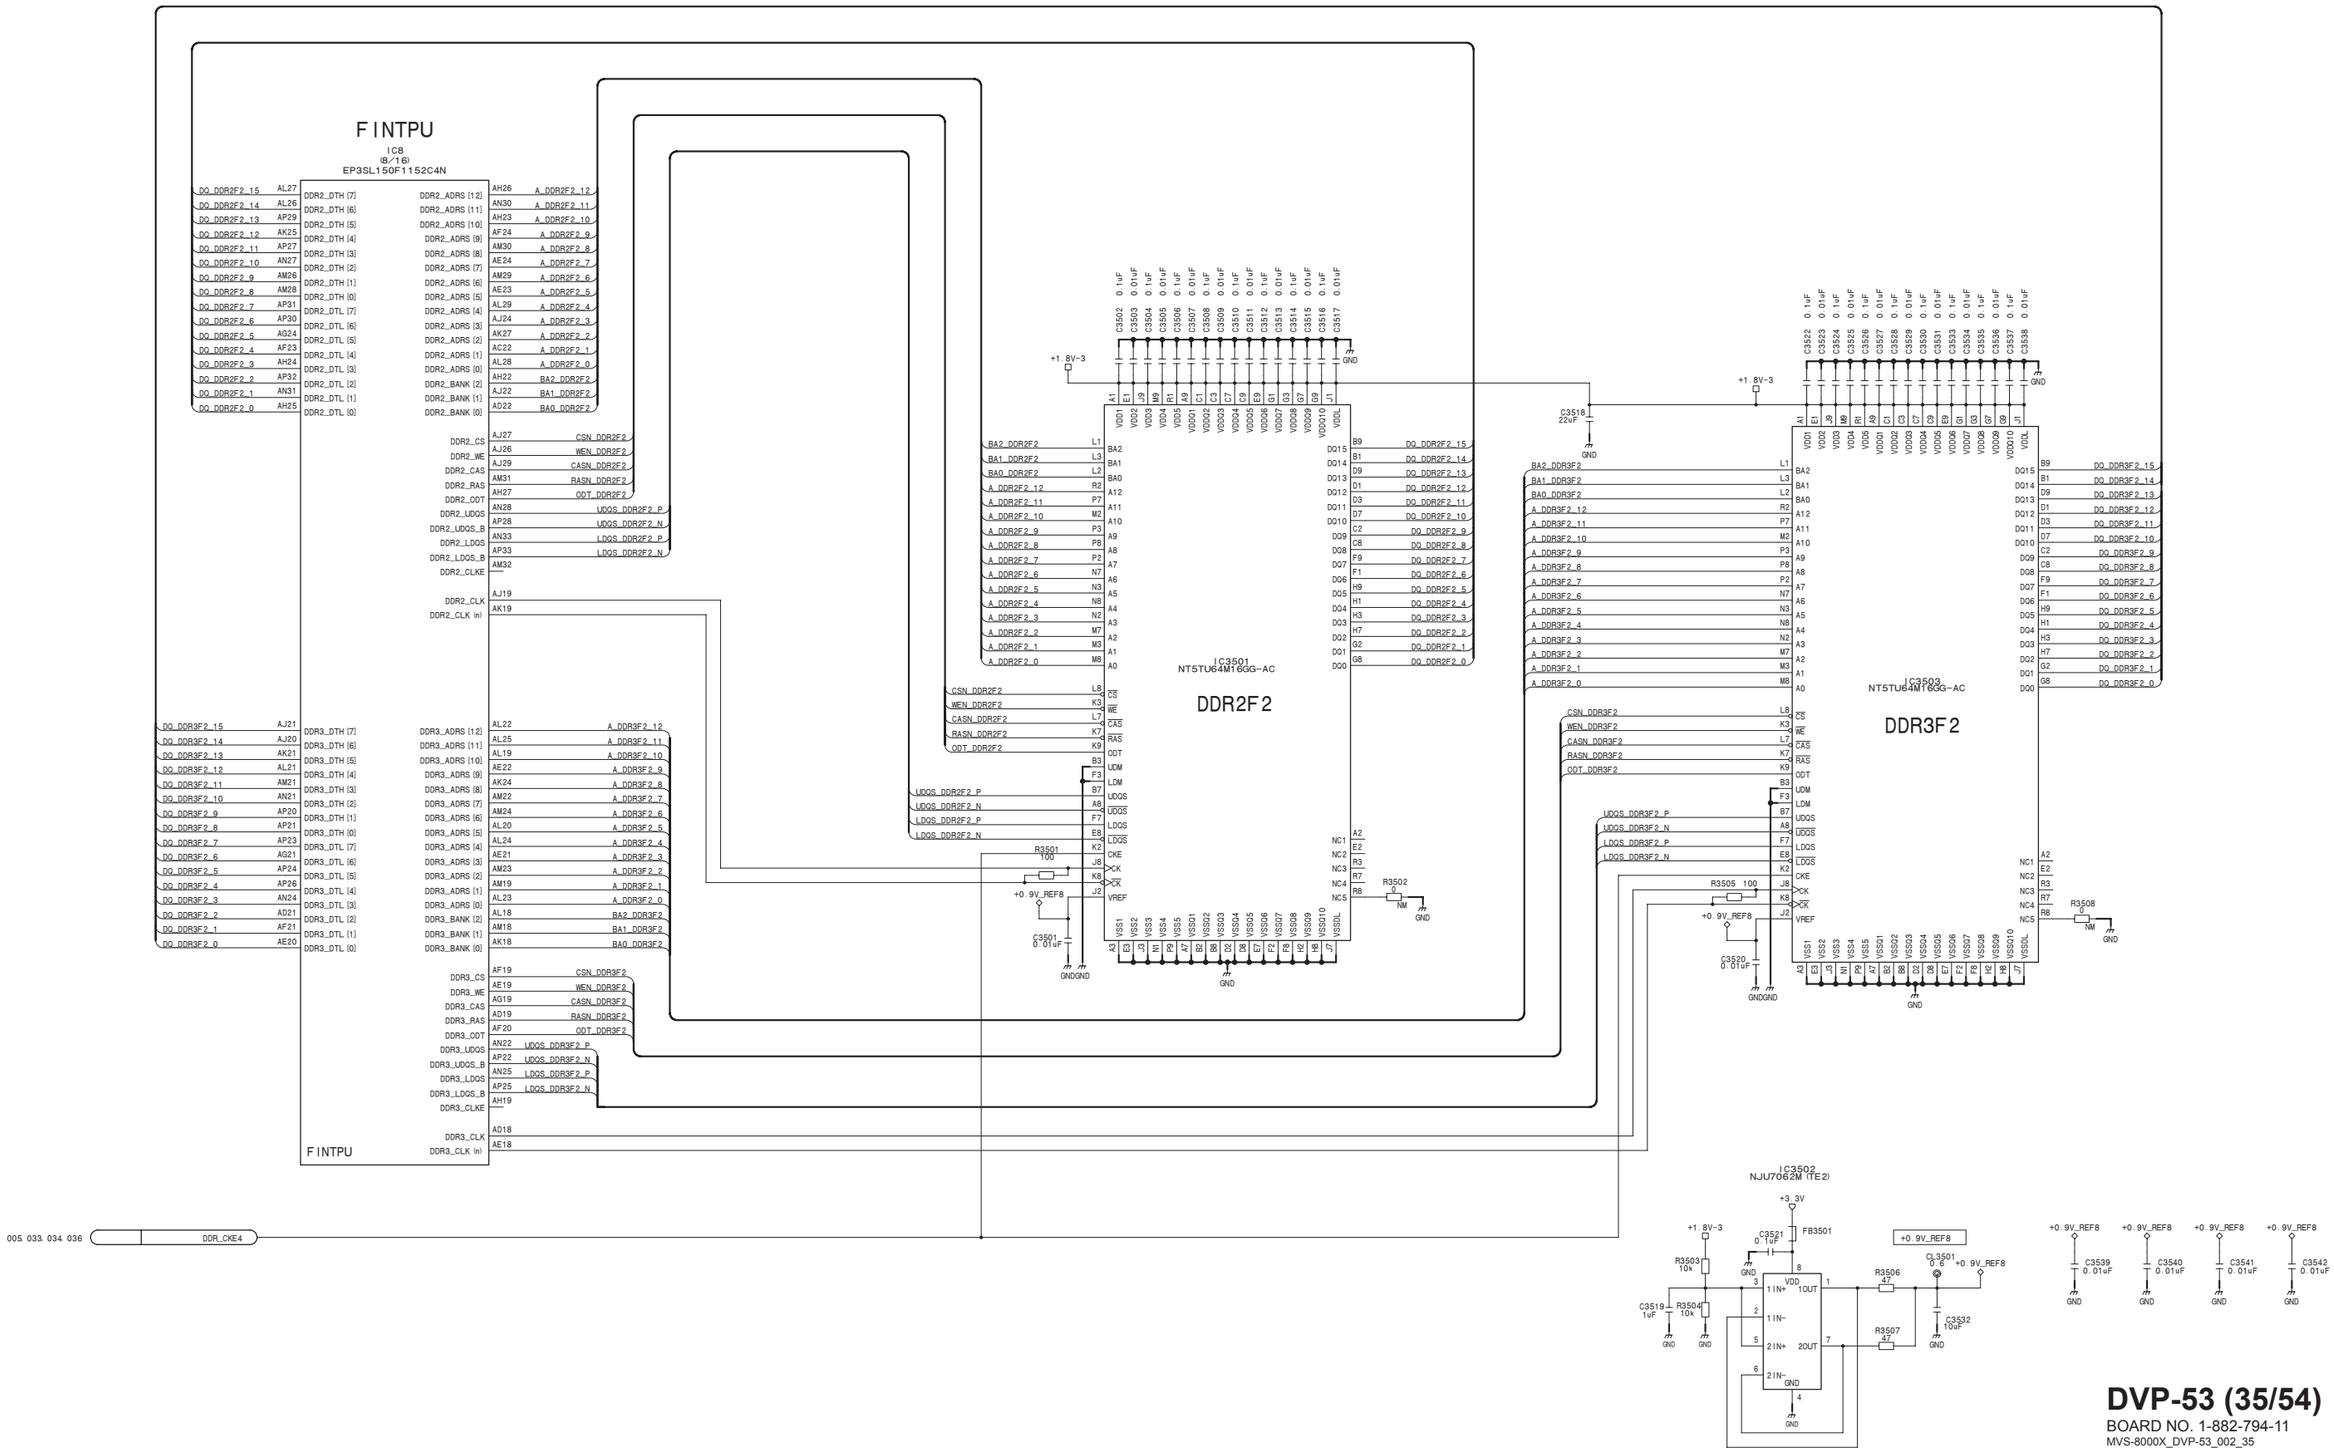

DVP-53 (35/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_35

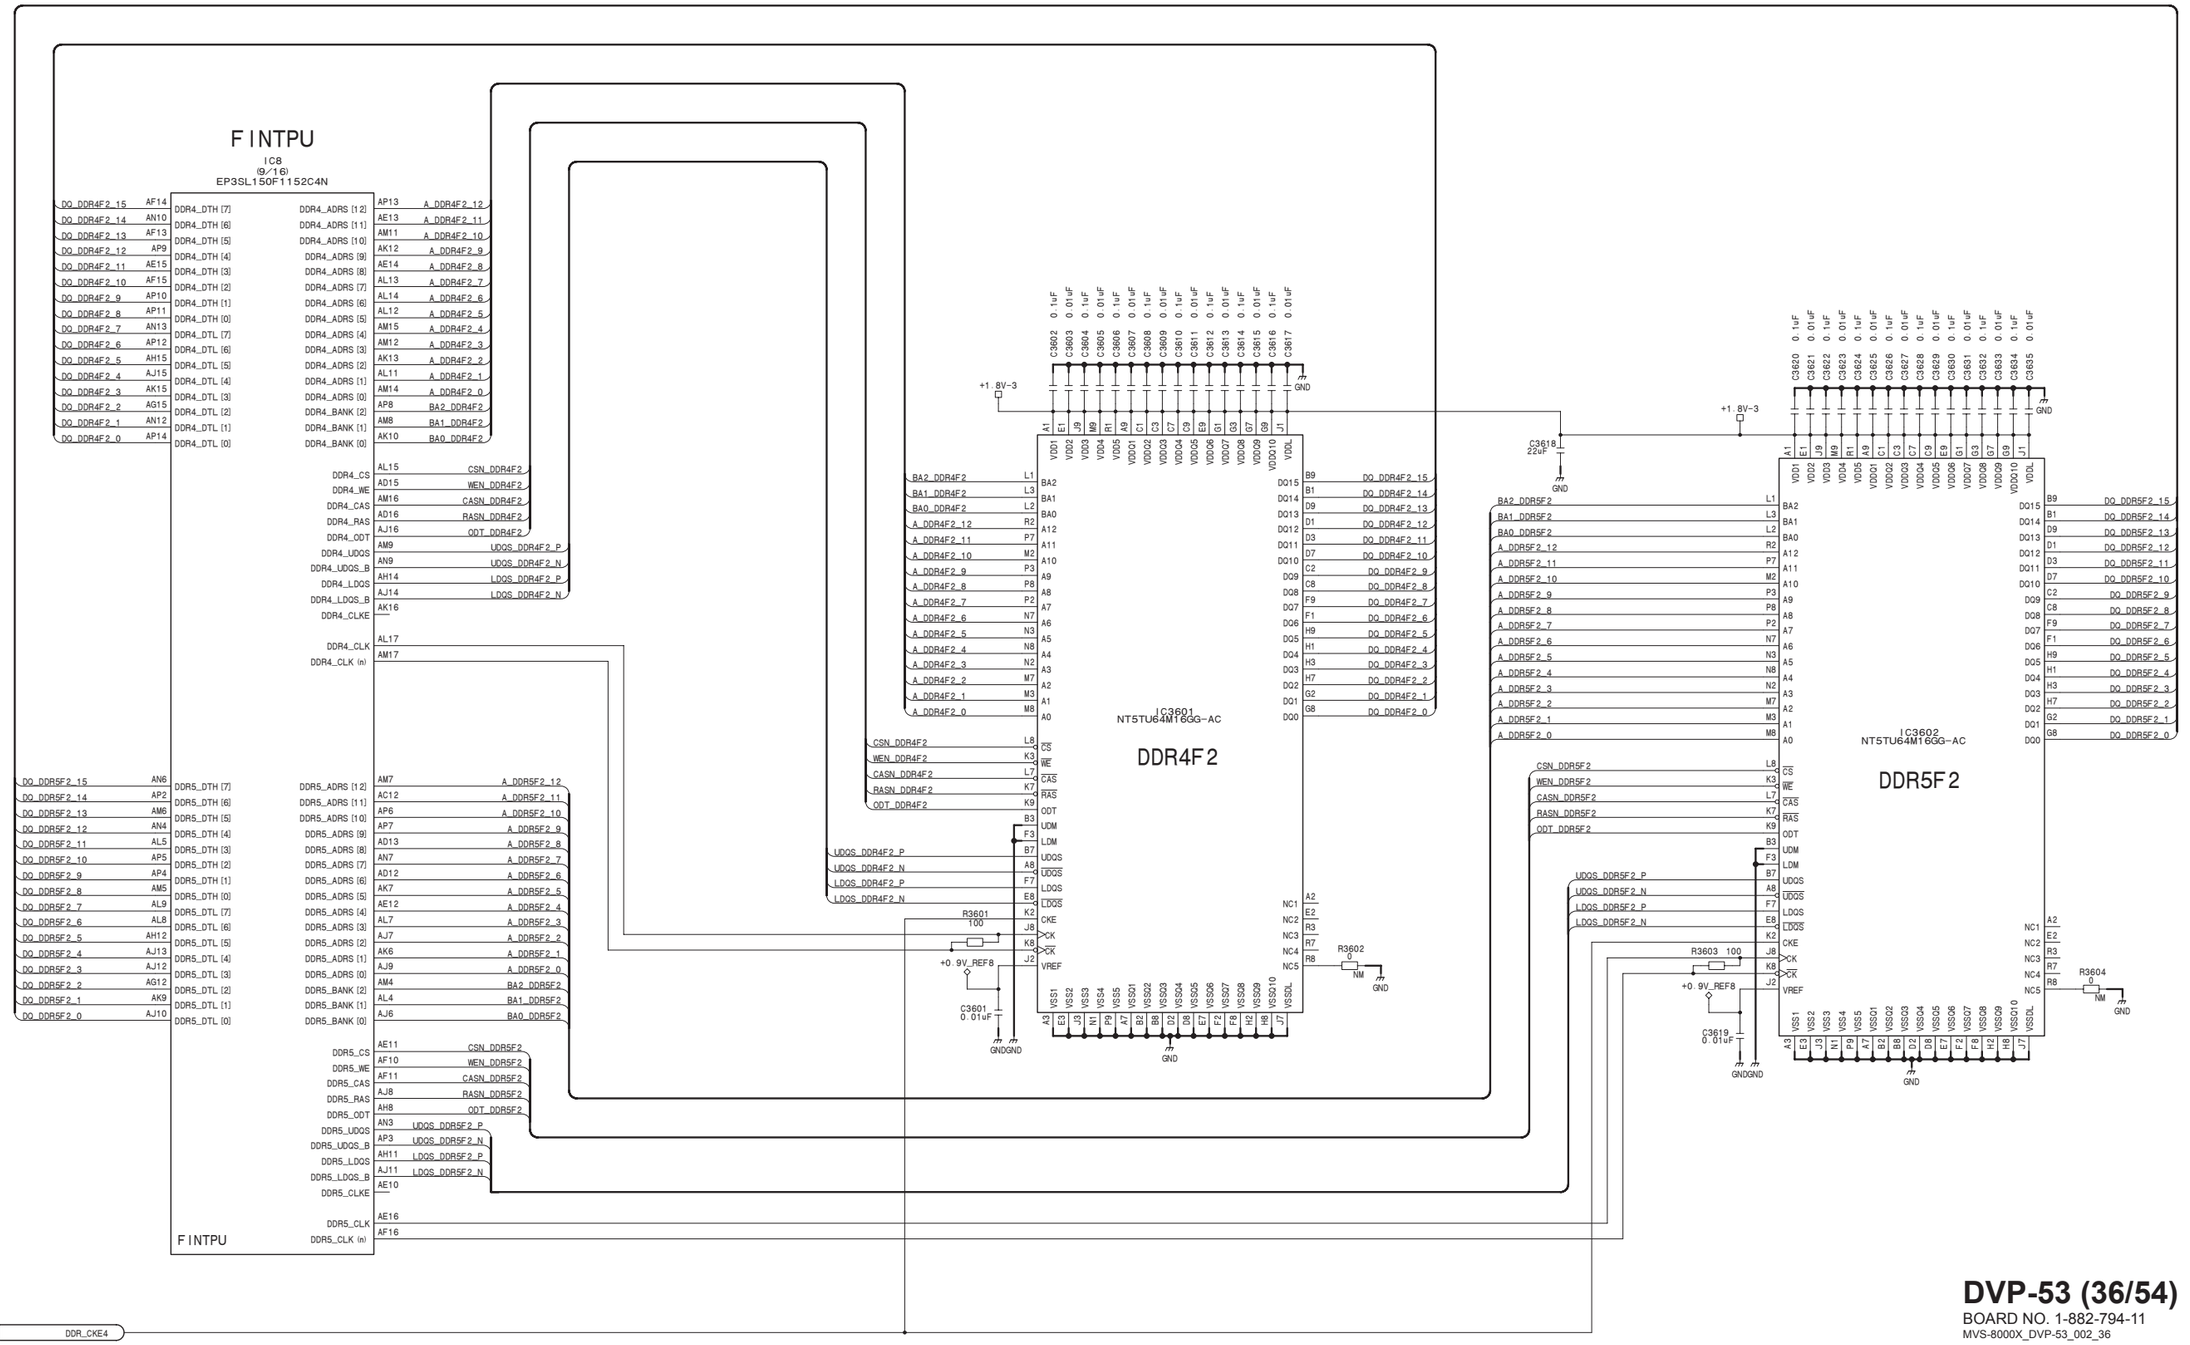

DVP-53 (36/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_36

DVP-53 (37/54)
SUFFIX: -11

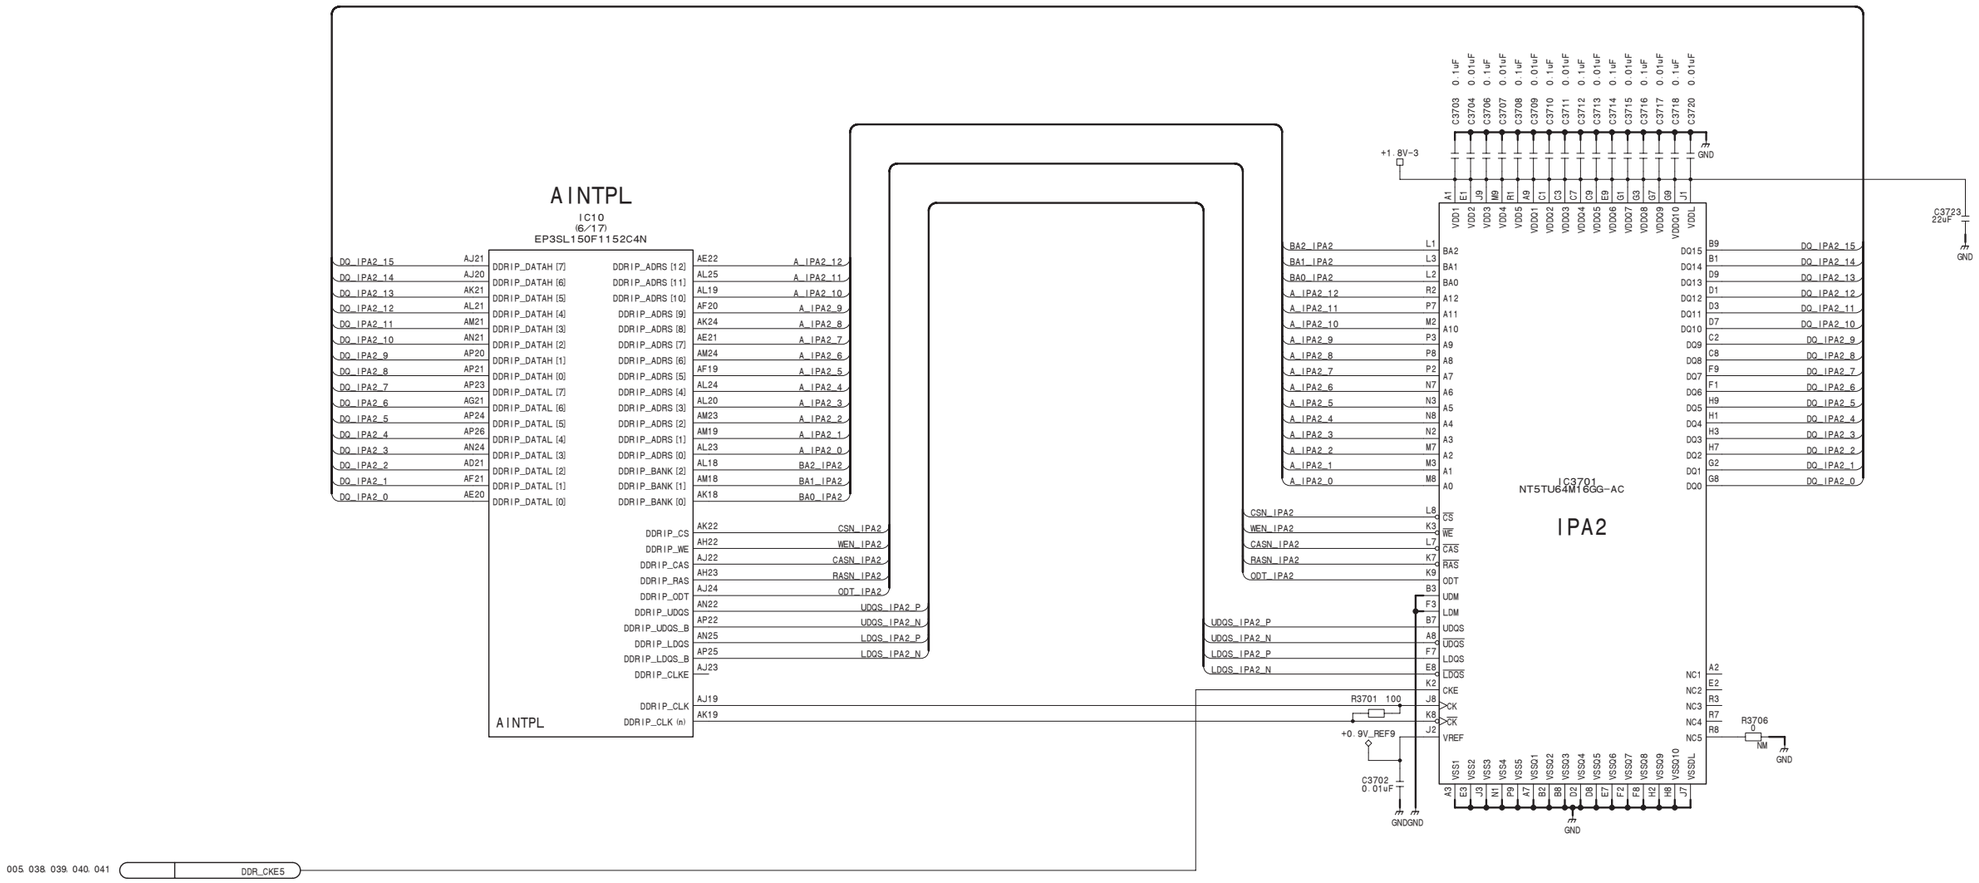

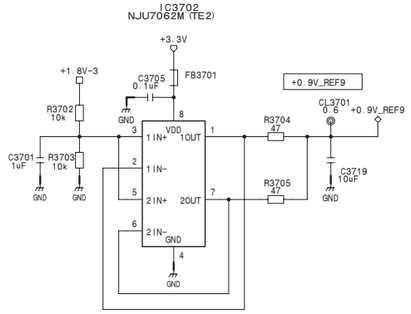



DVP-53 (37/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_37

4-406

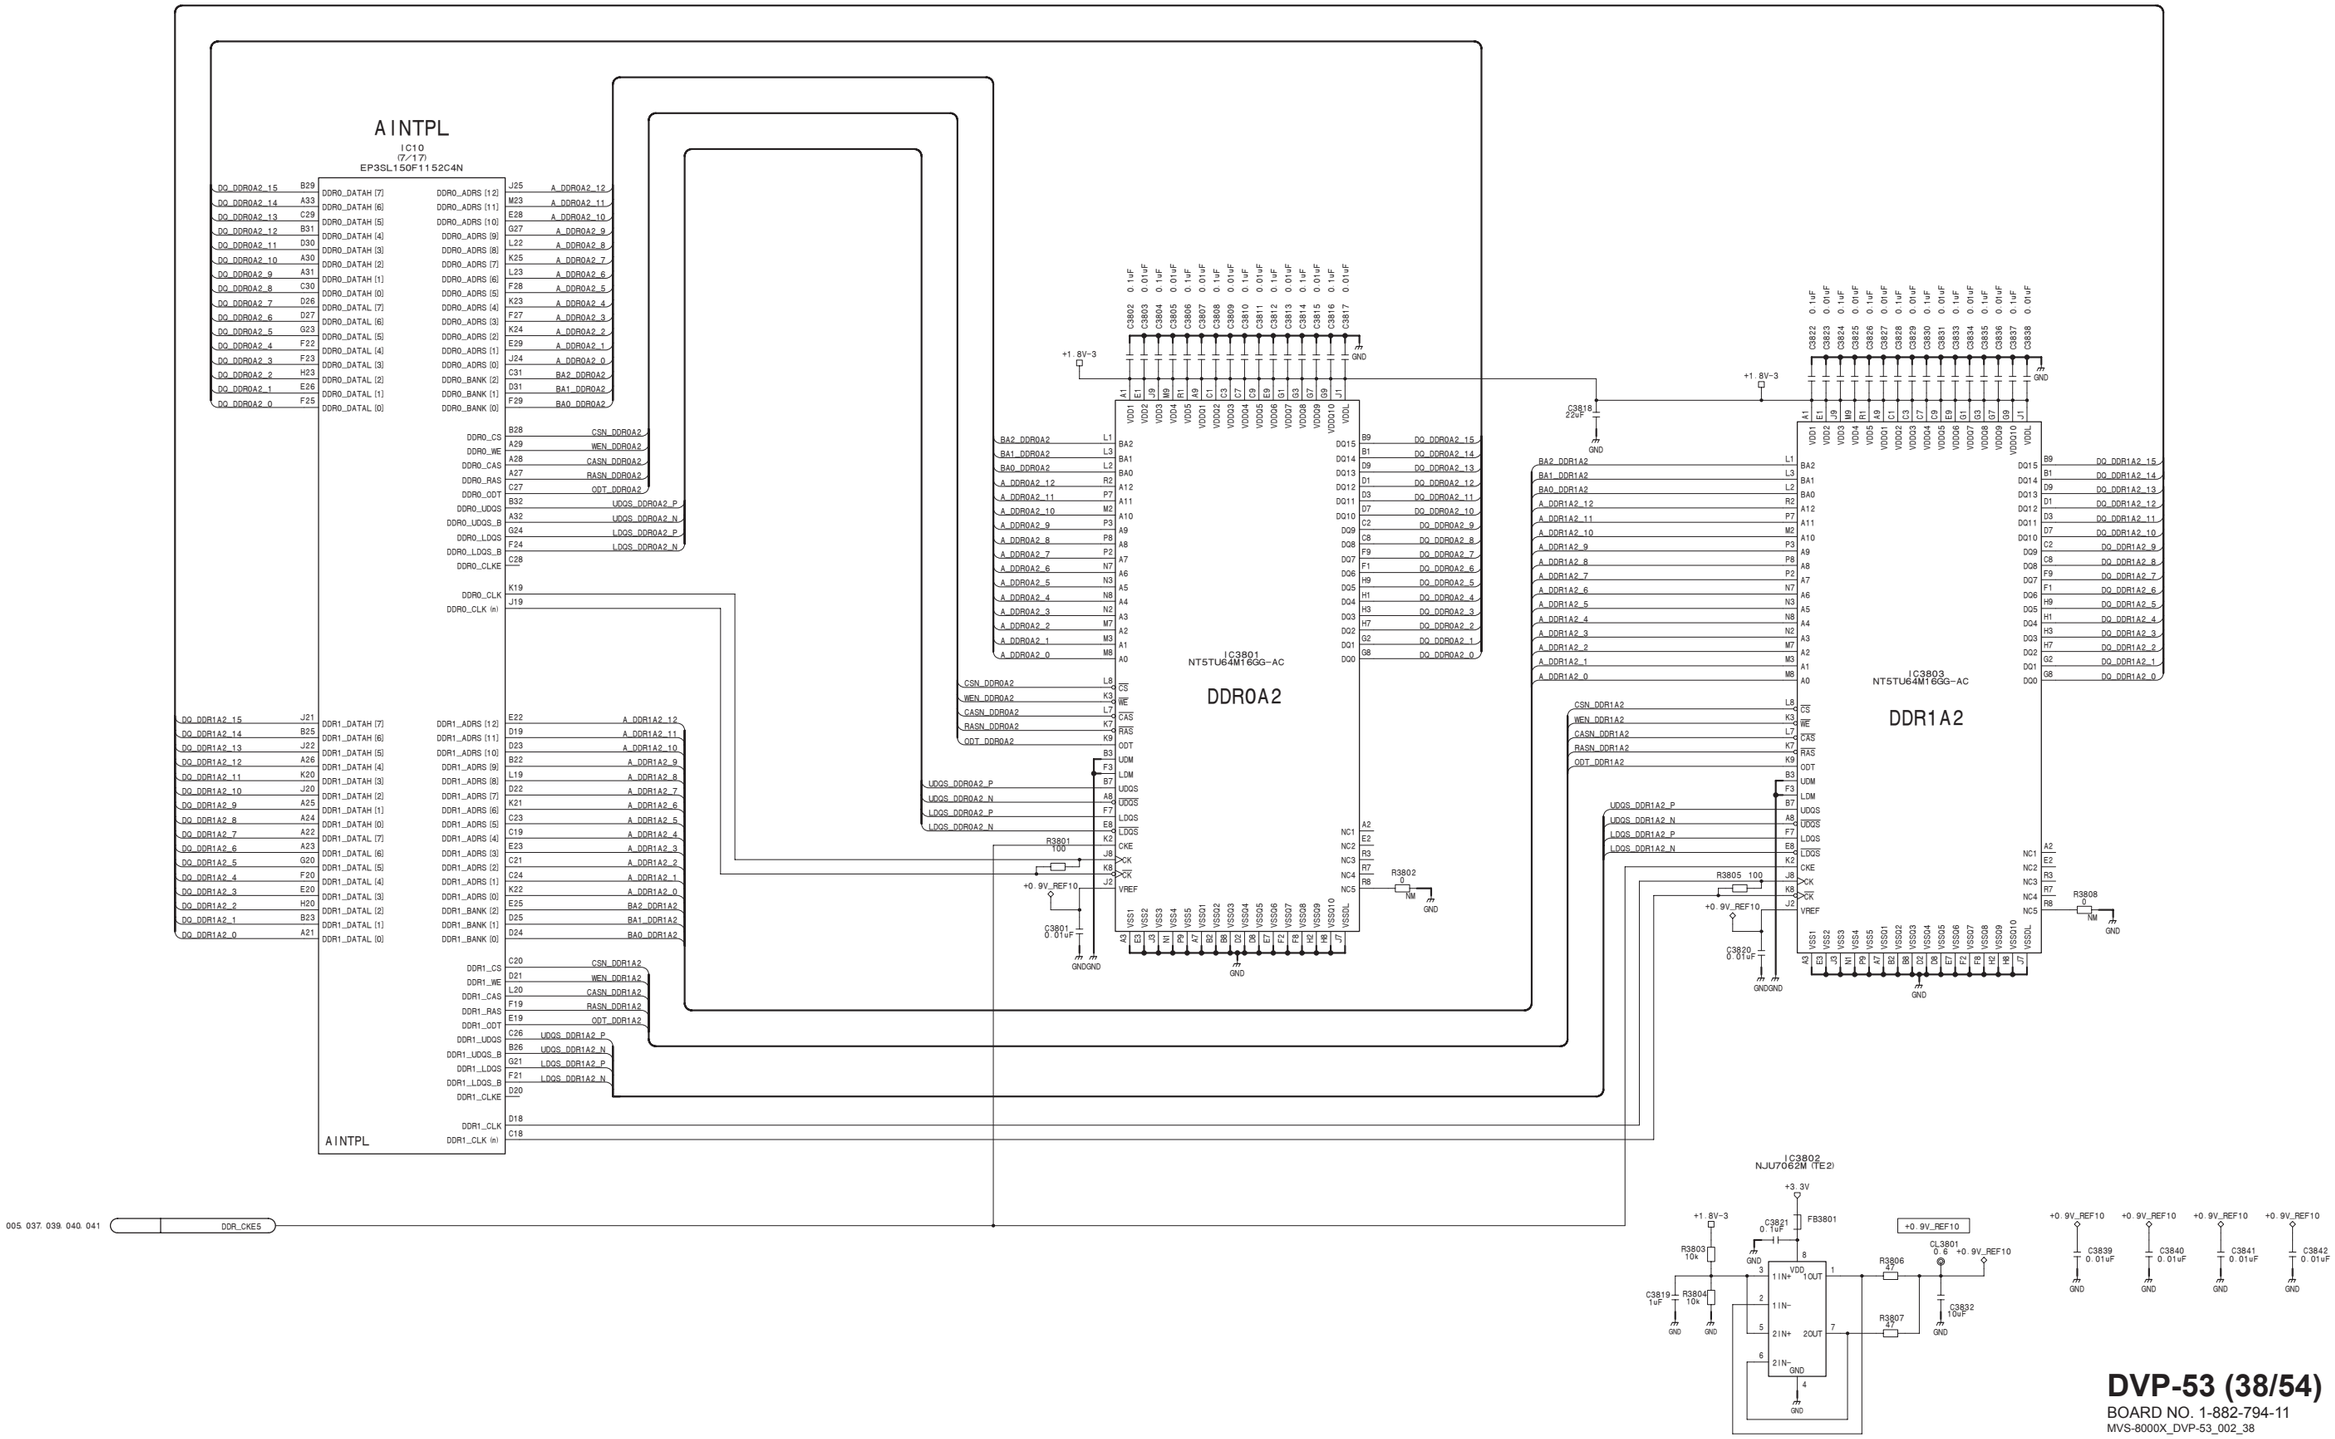

DVP-53 (38/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_38

DVP-53 (39/54)
SUFFIX: -11

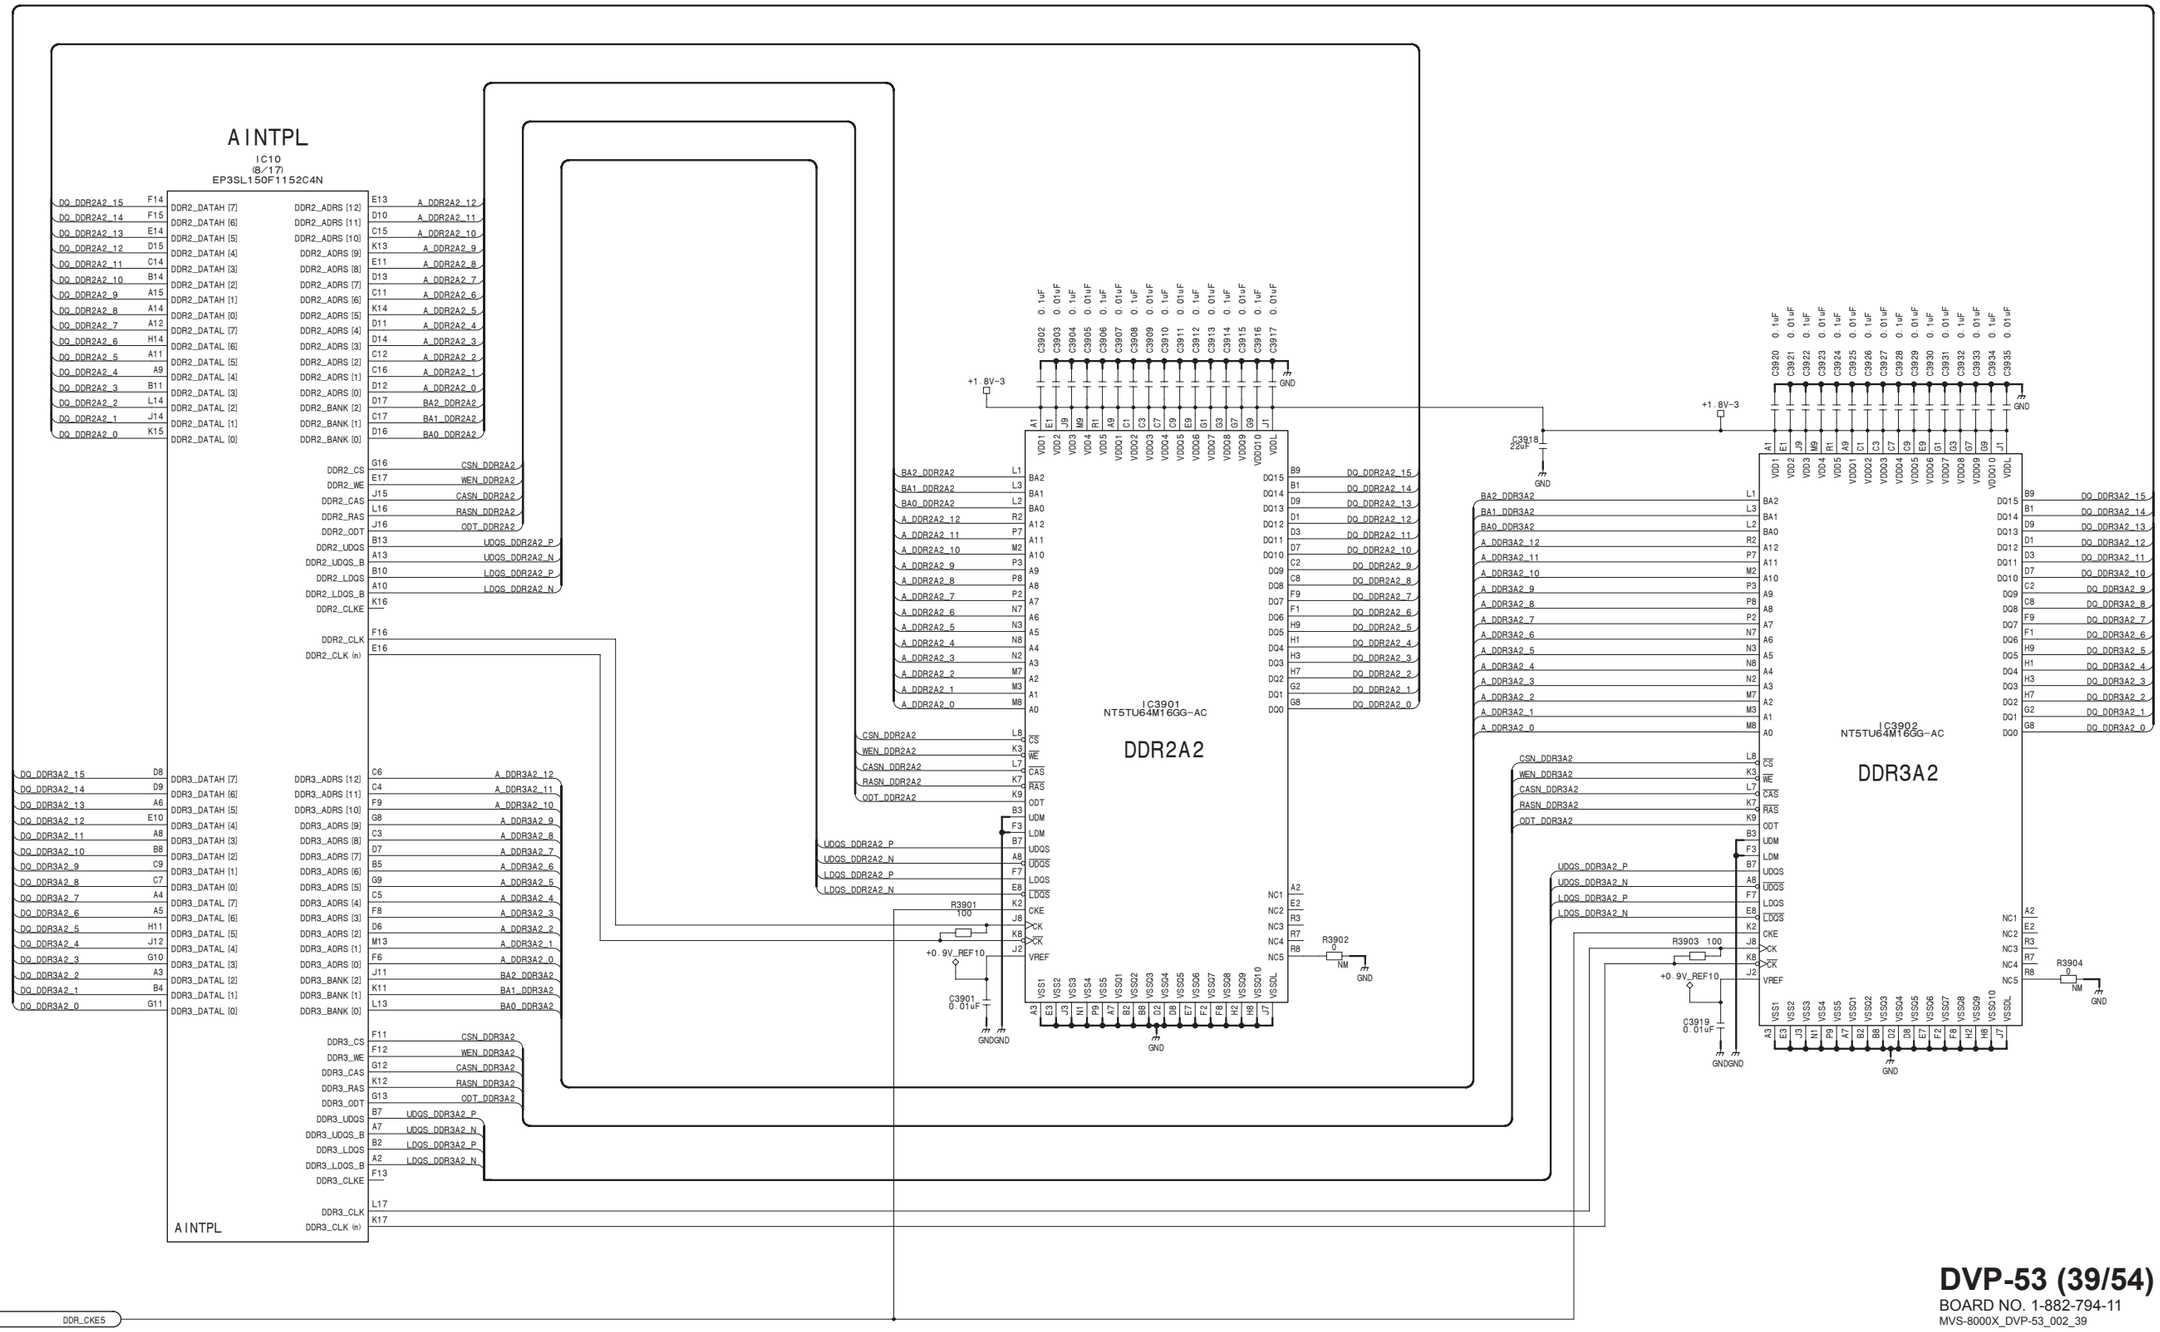

DVP-53 (39/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_39

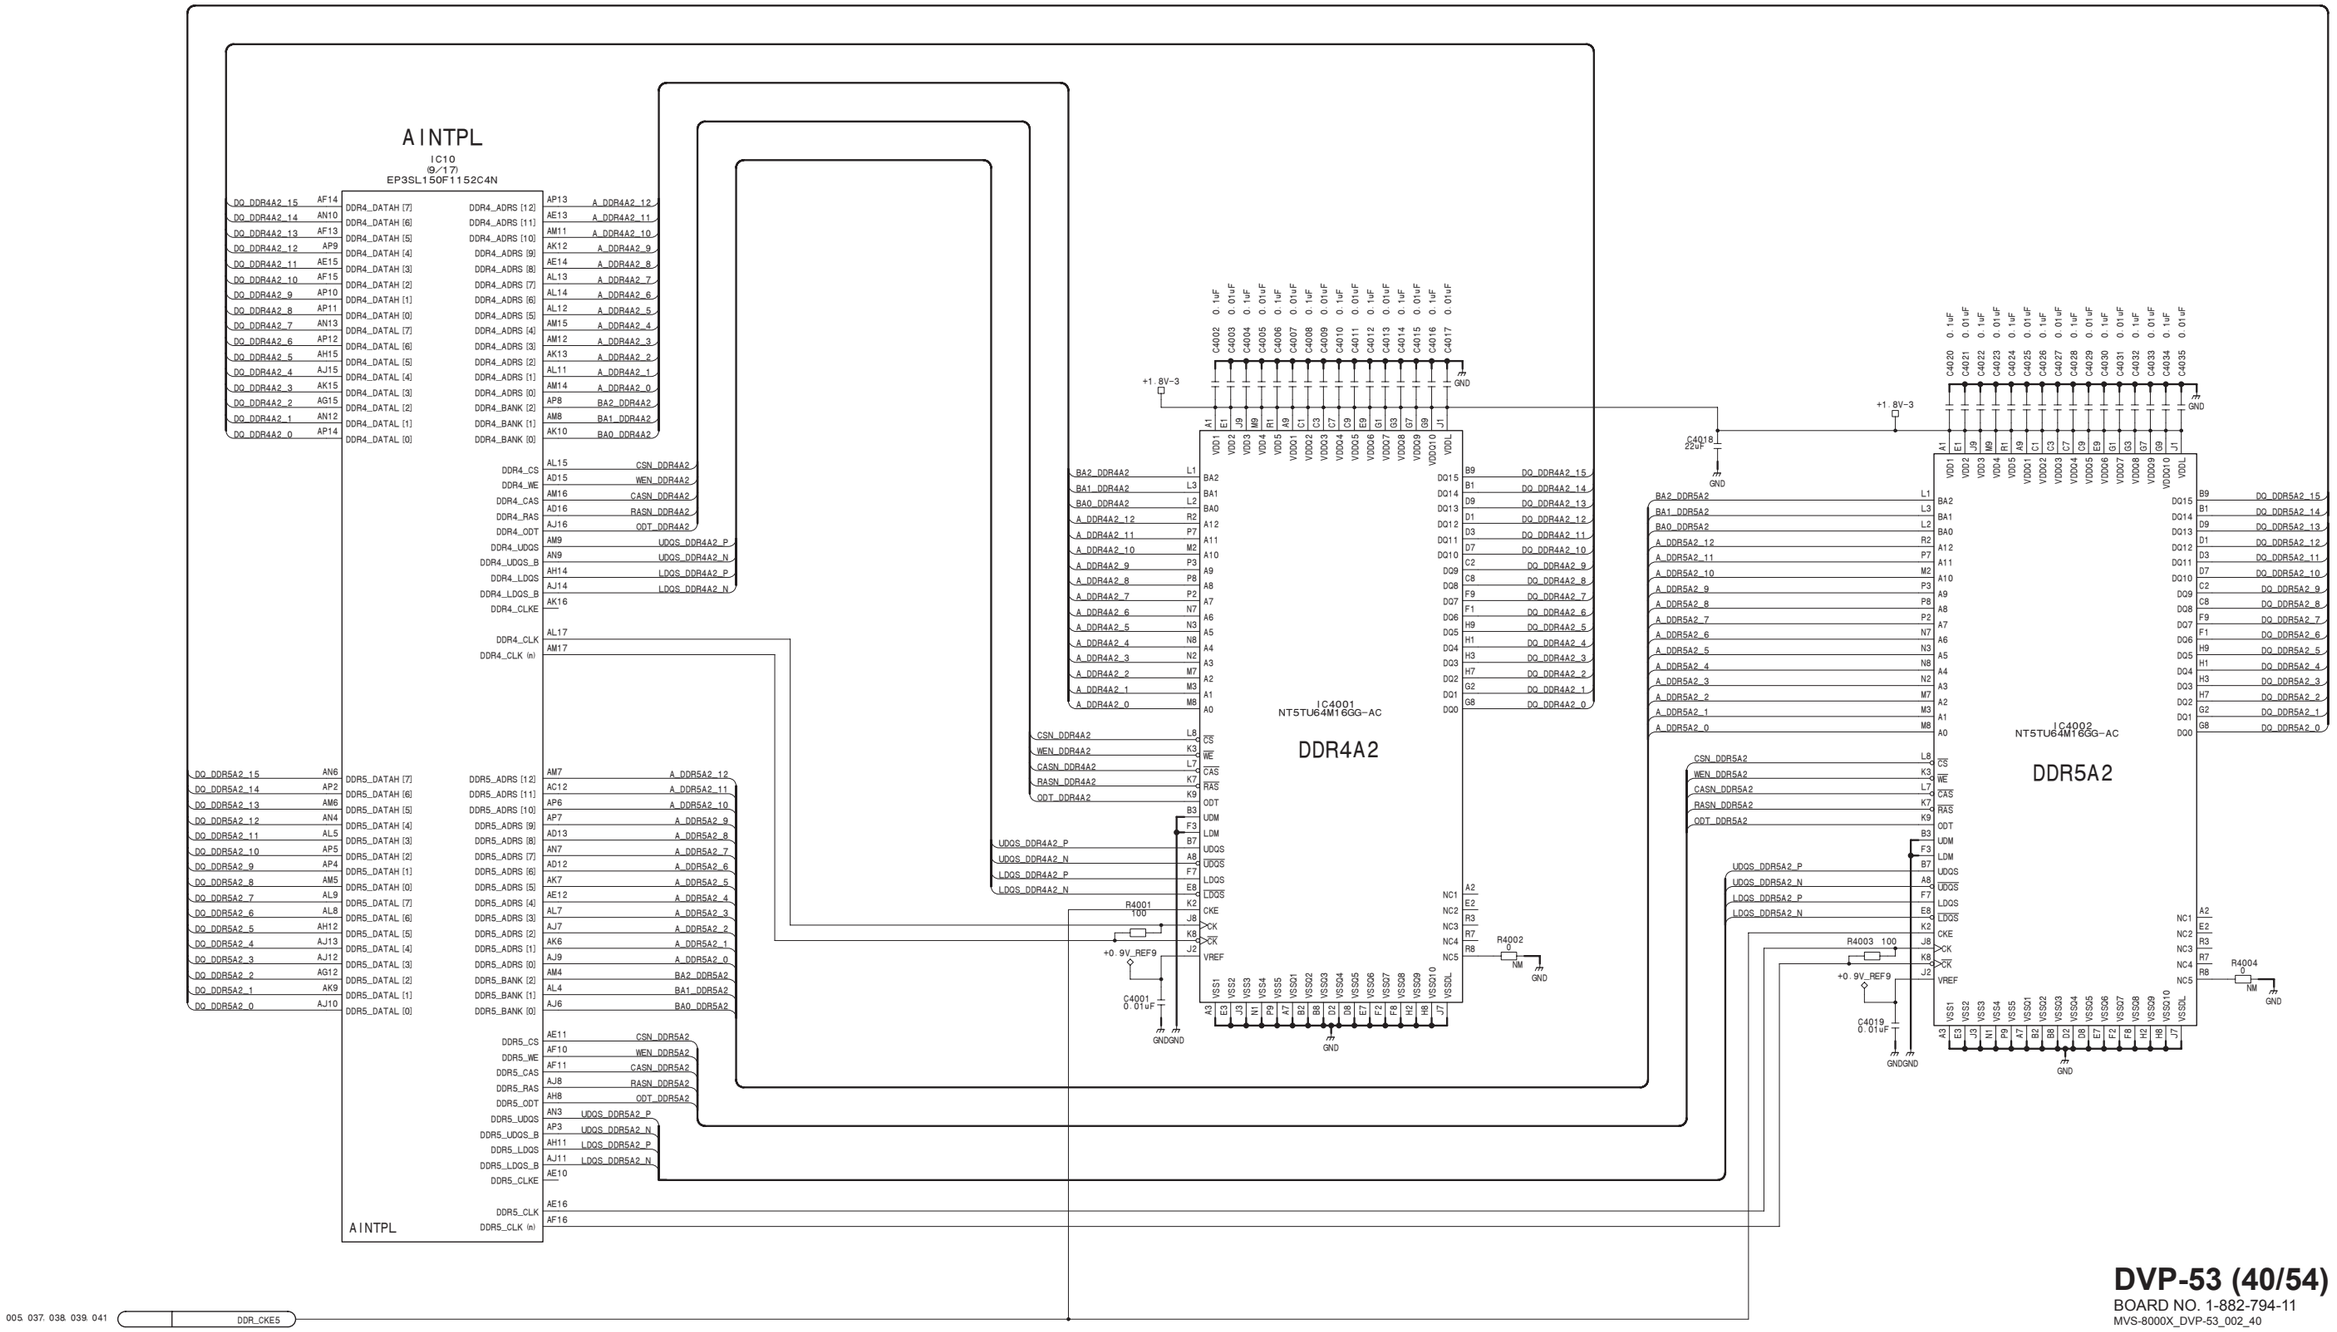

DVP-53 (40/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_40

DVP-53 (41/54)
SUFFIX: -11

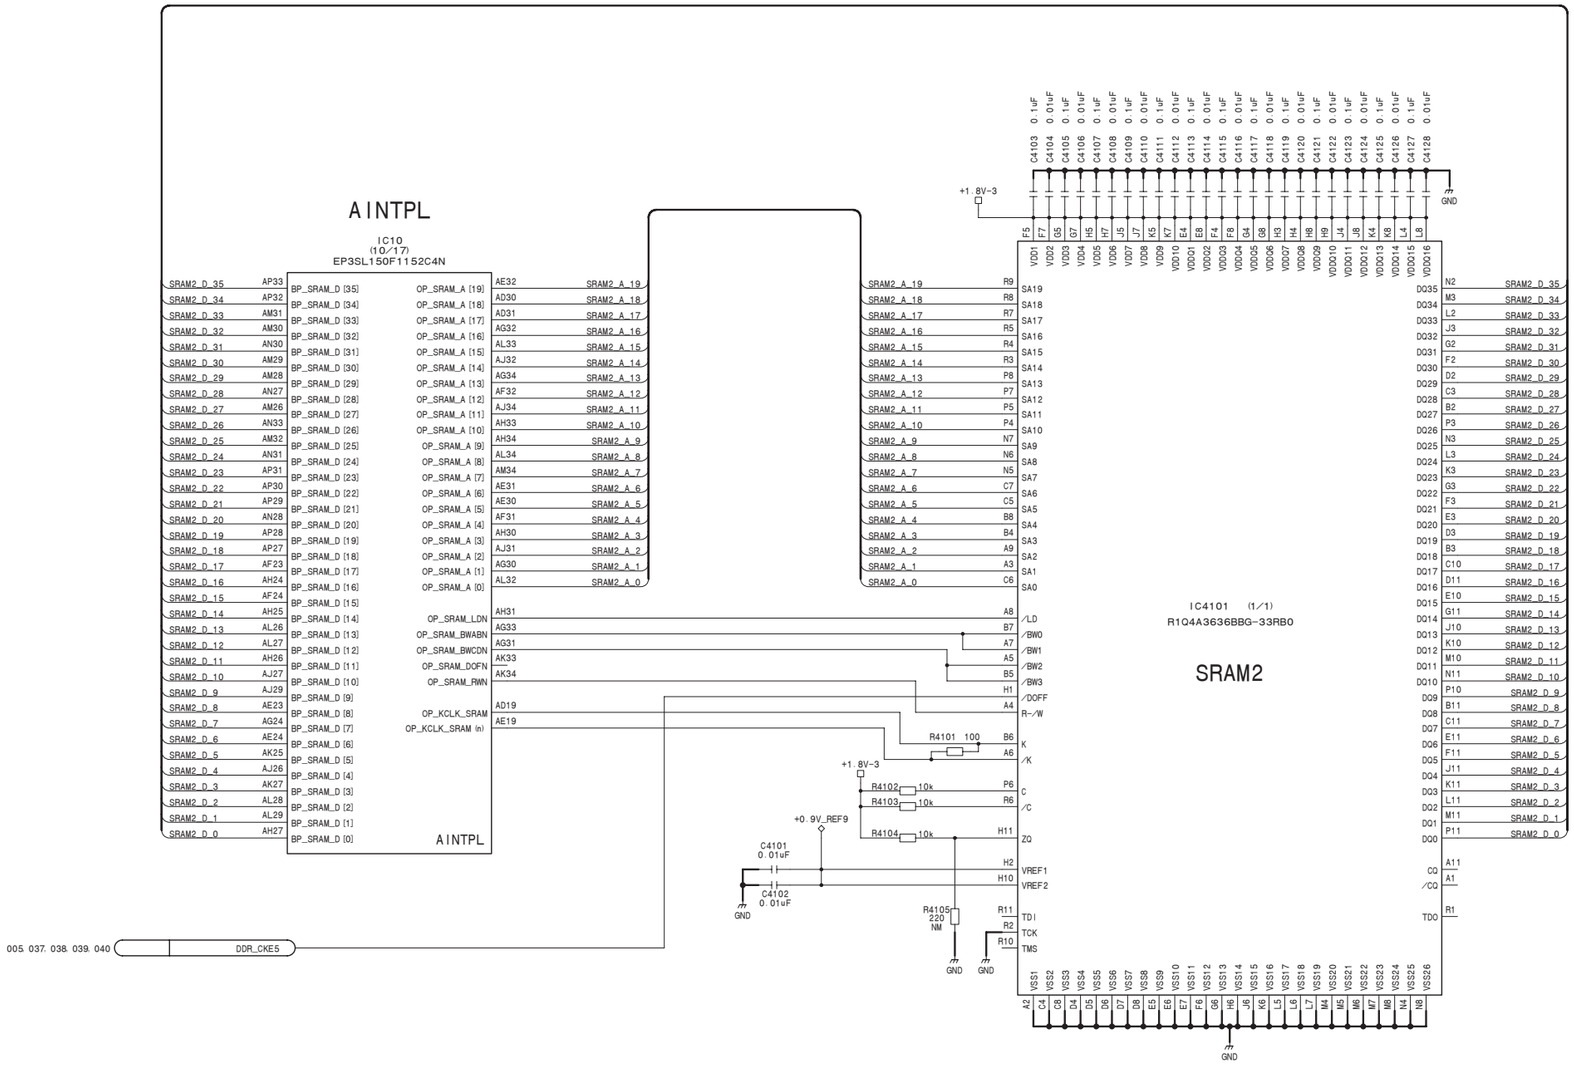

DVP-53 (41/54)

BOARD NO. 1-882-794-11

MVS-8000X_DVP-53_002_41

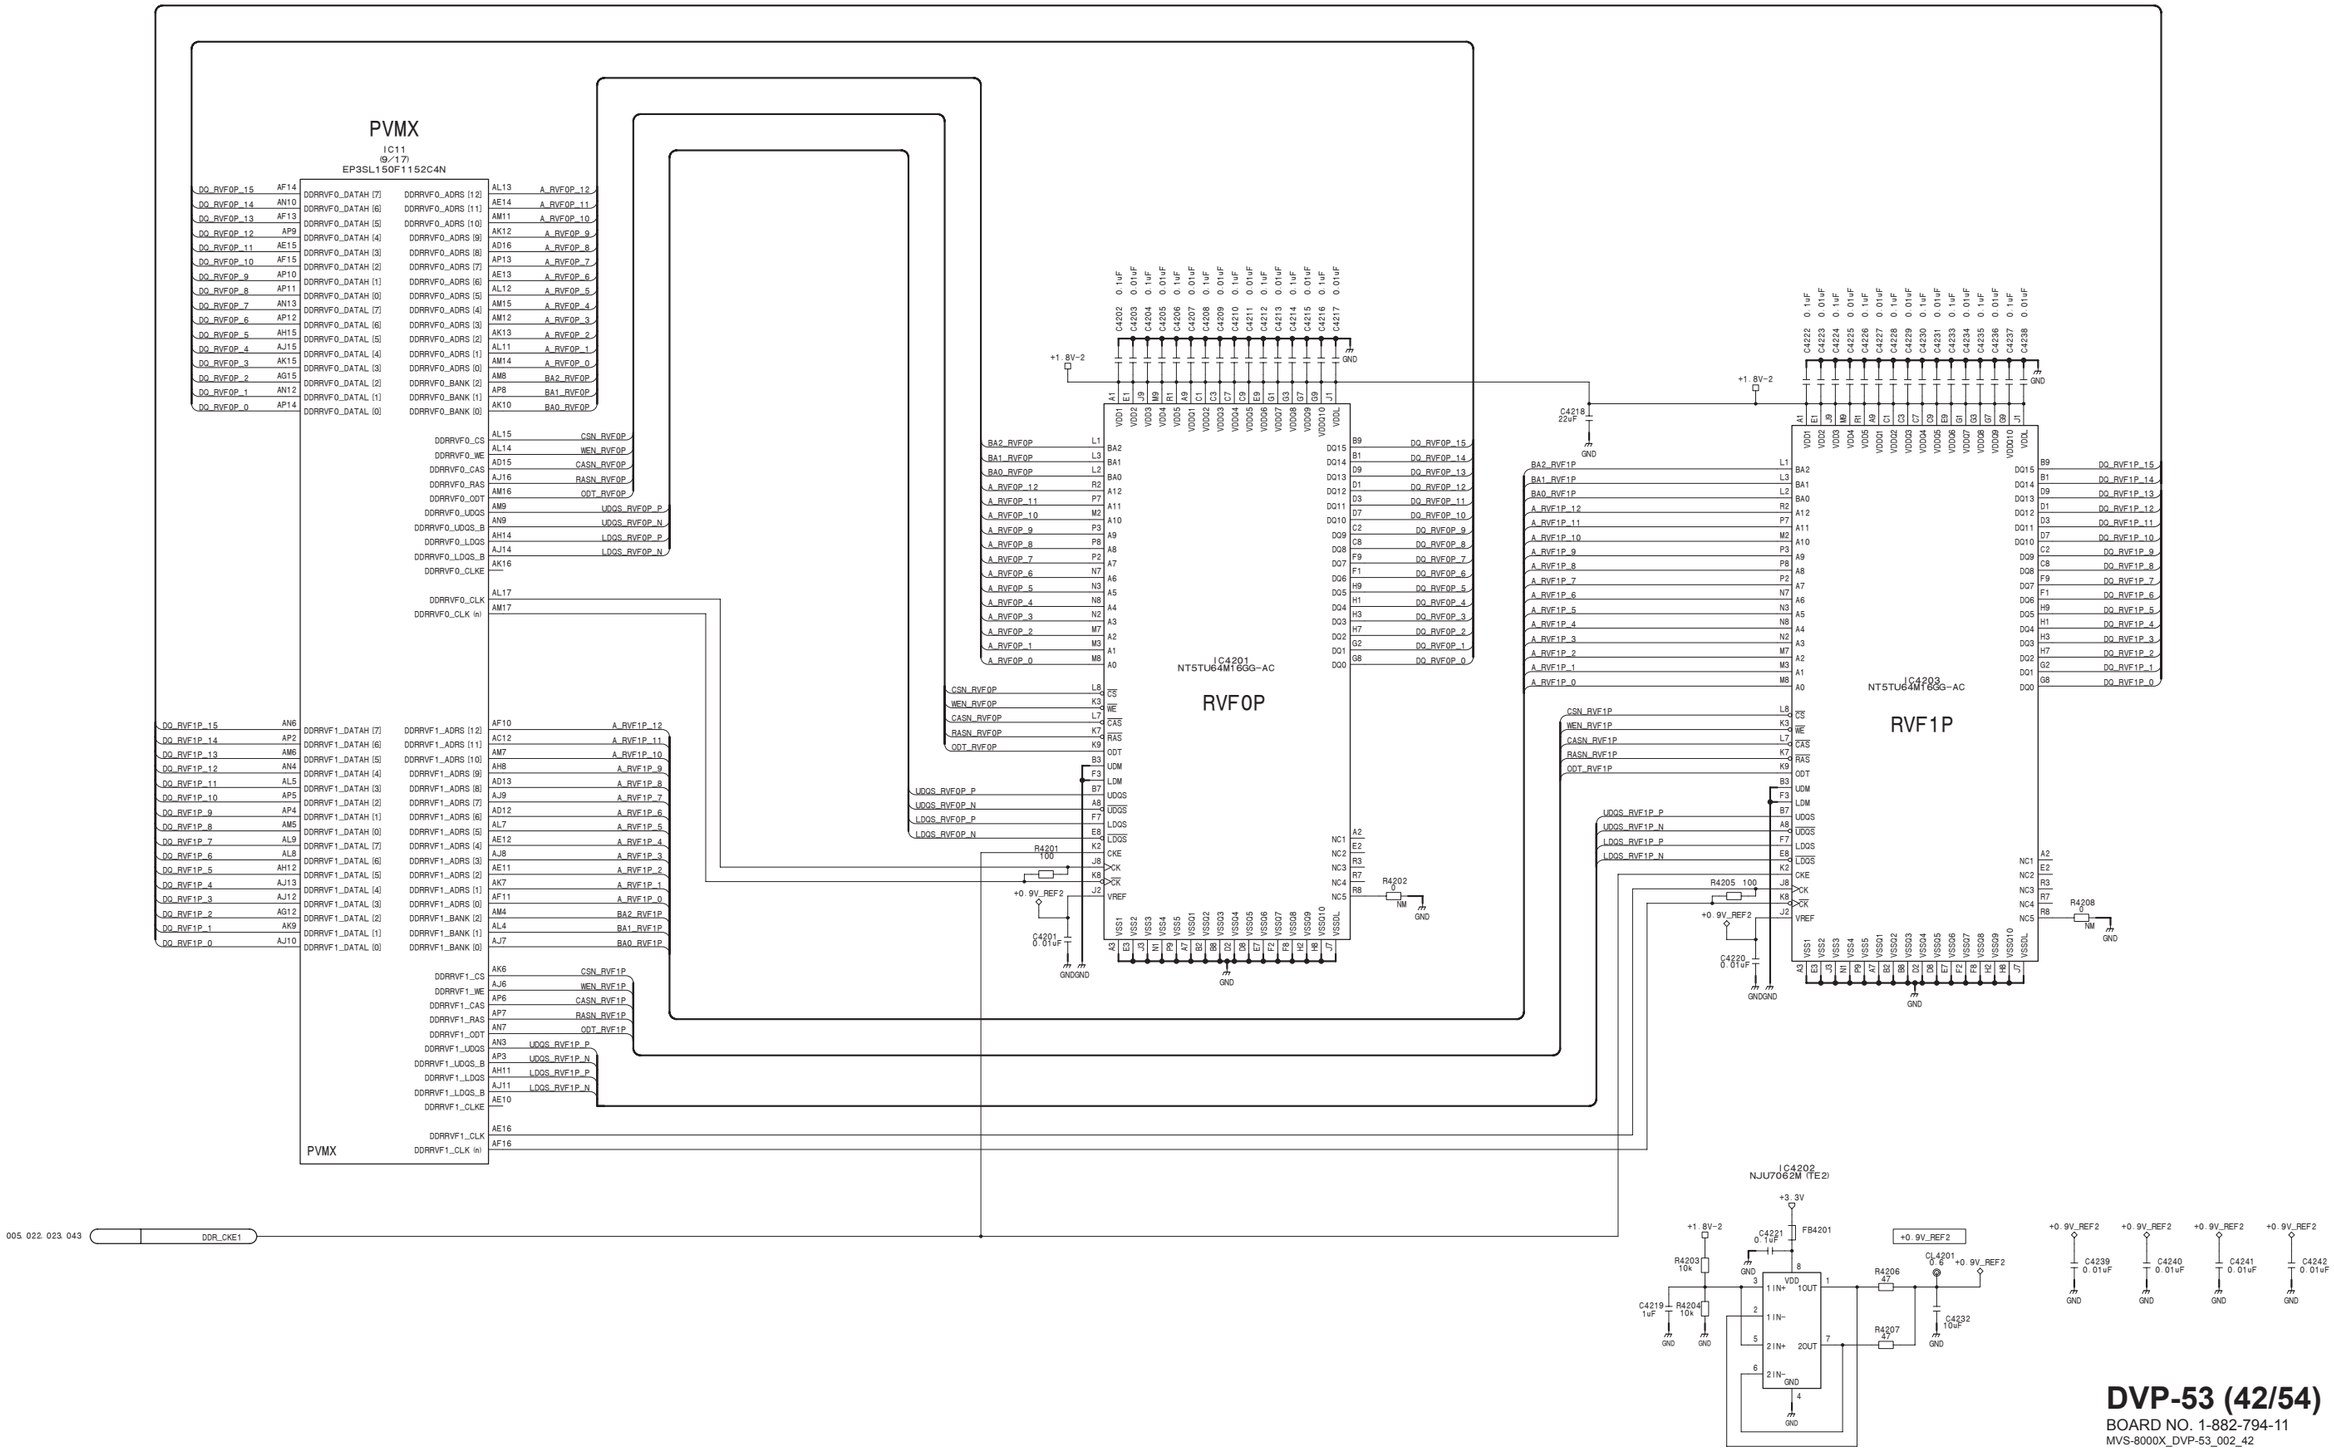

DVP-53 (42/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_42

DVP-53 (43/54)
SUFFIX: -11

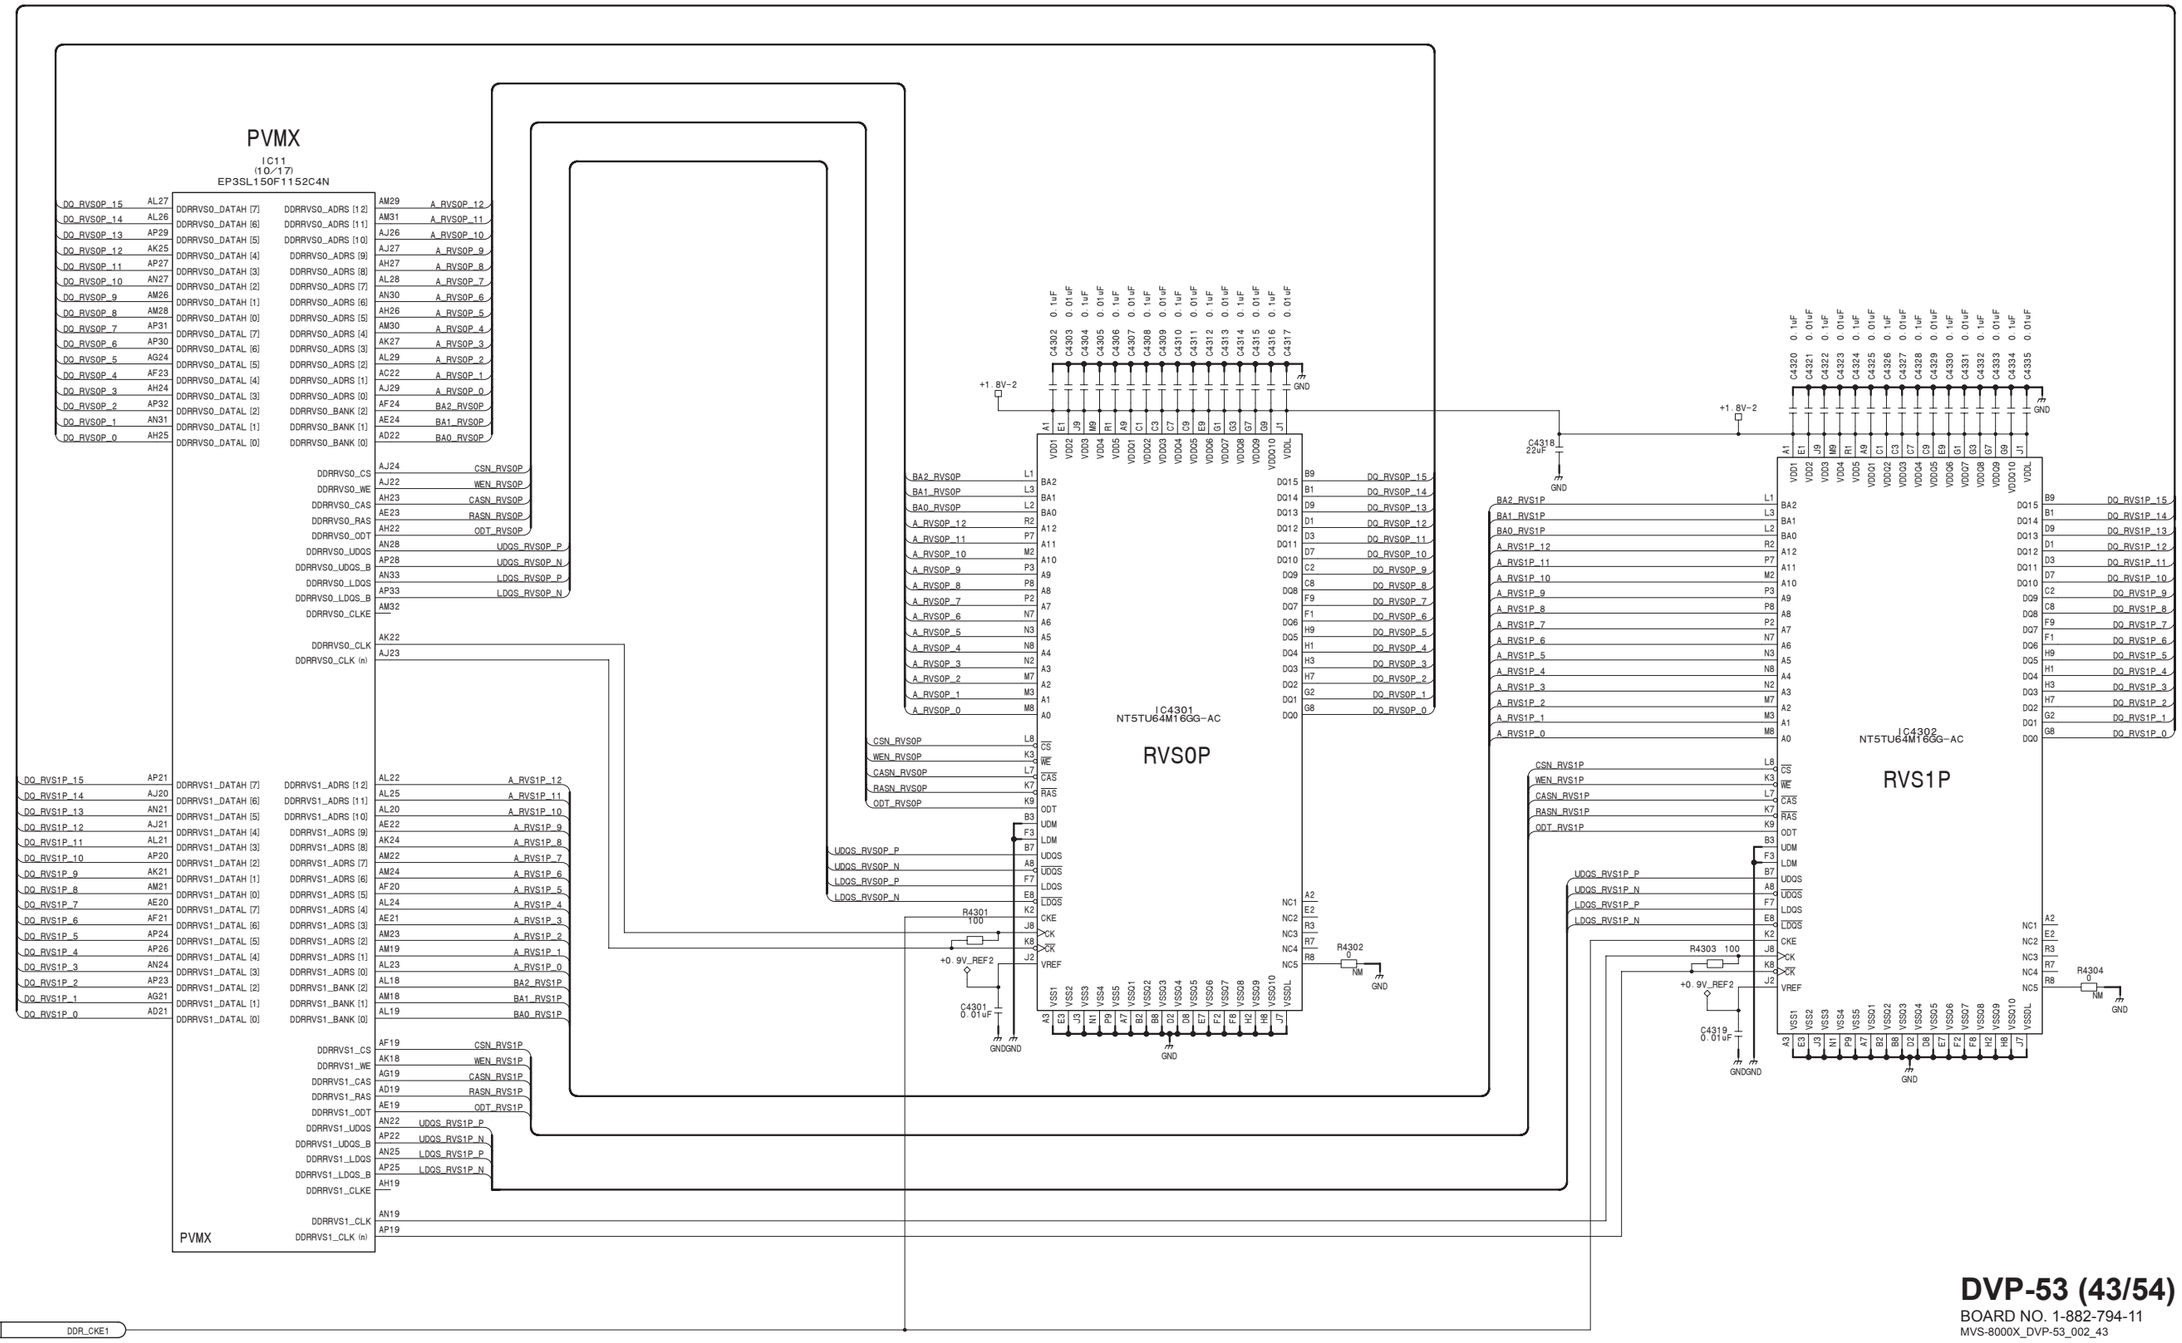

DVP-53 (43/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_43

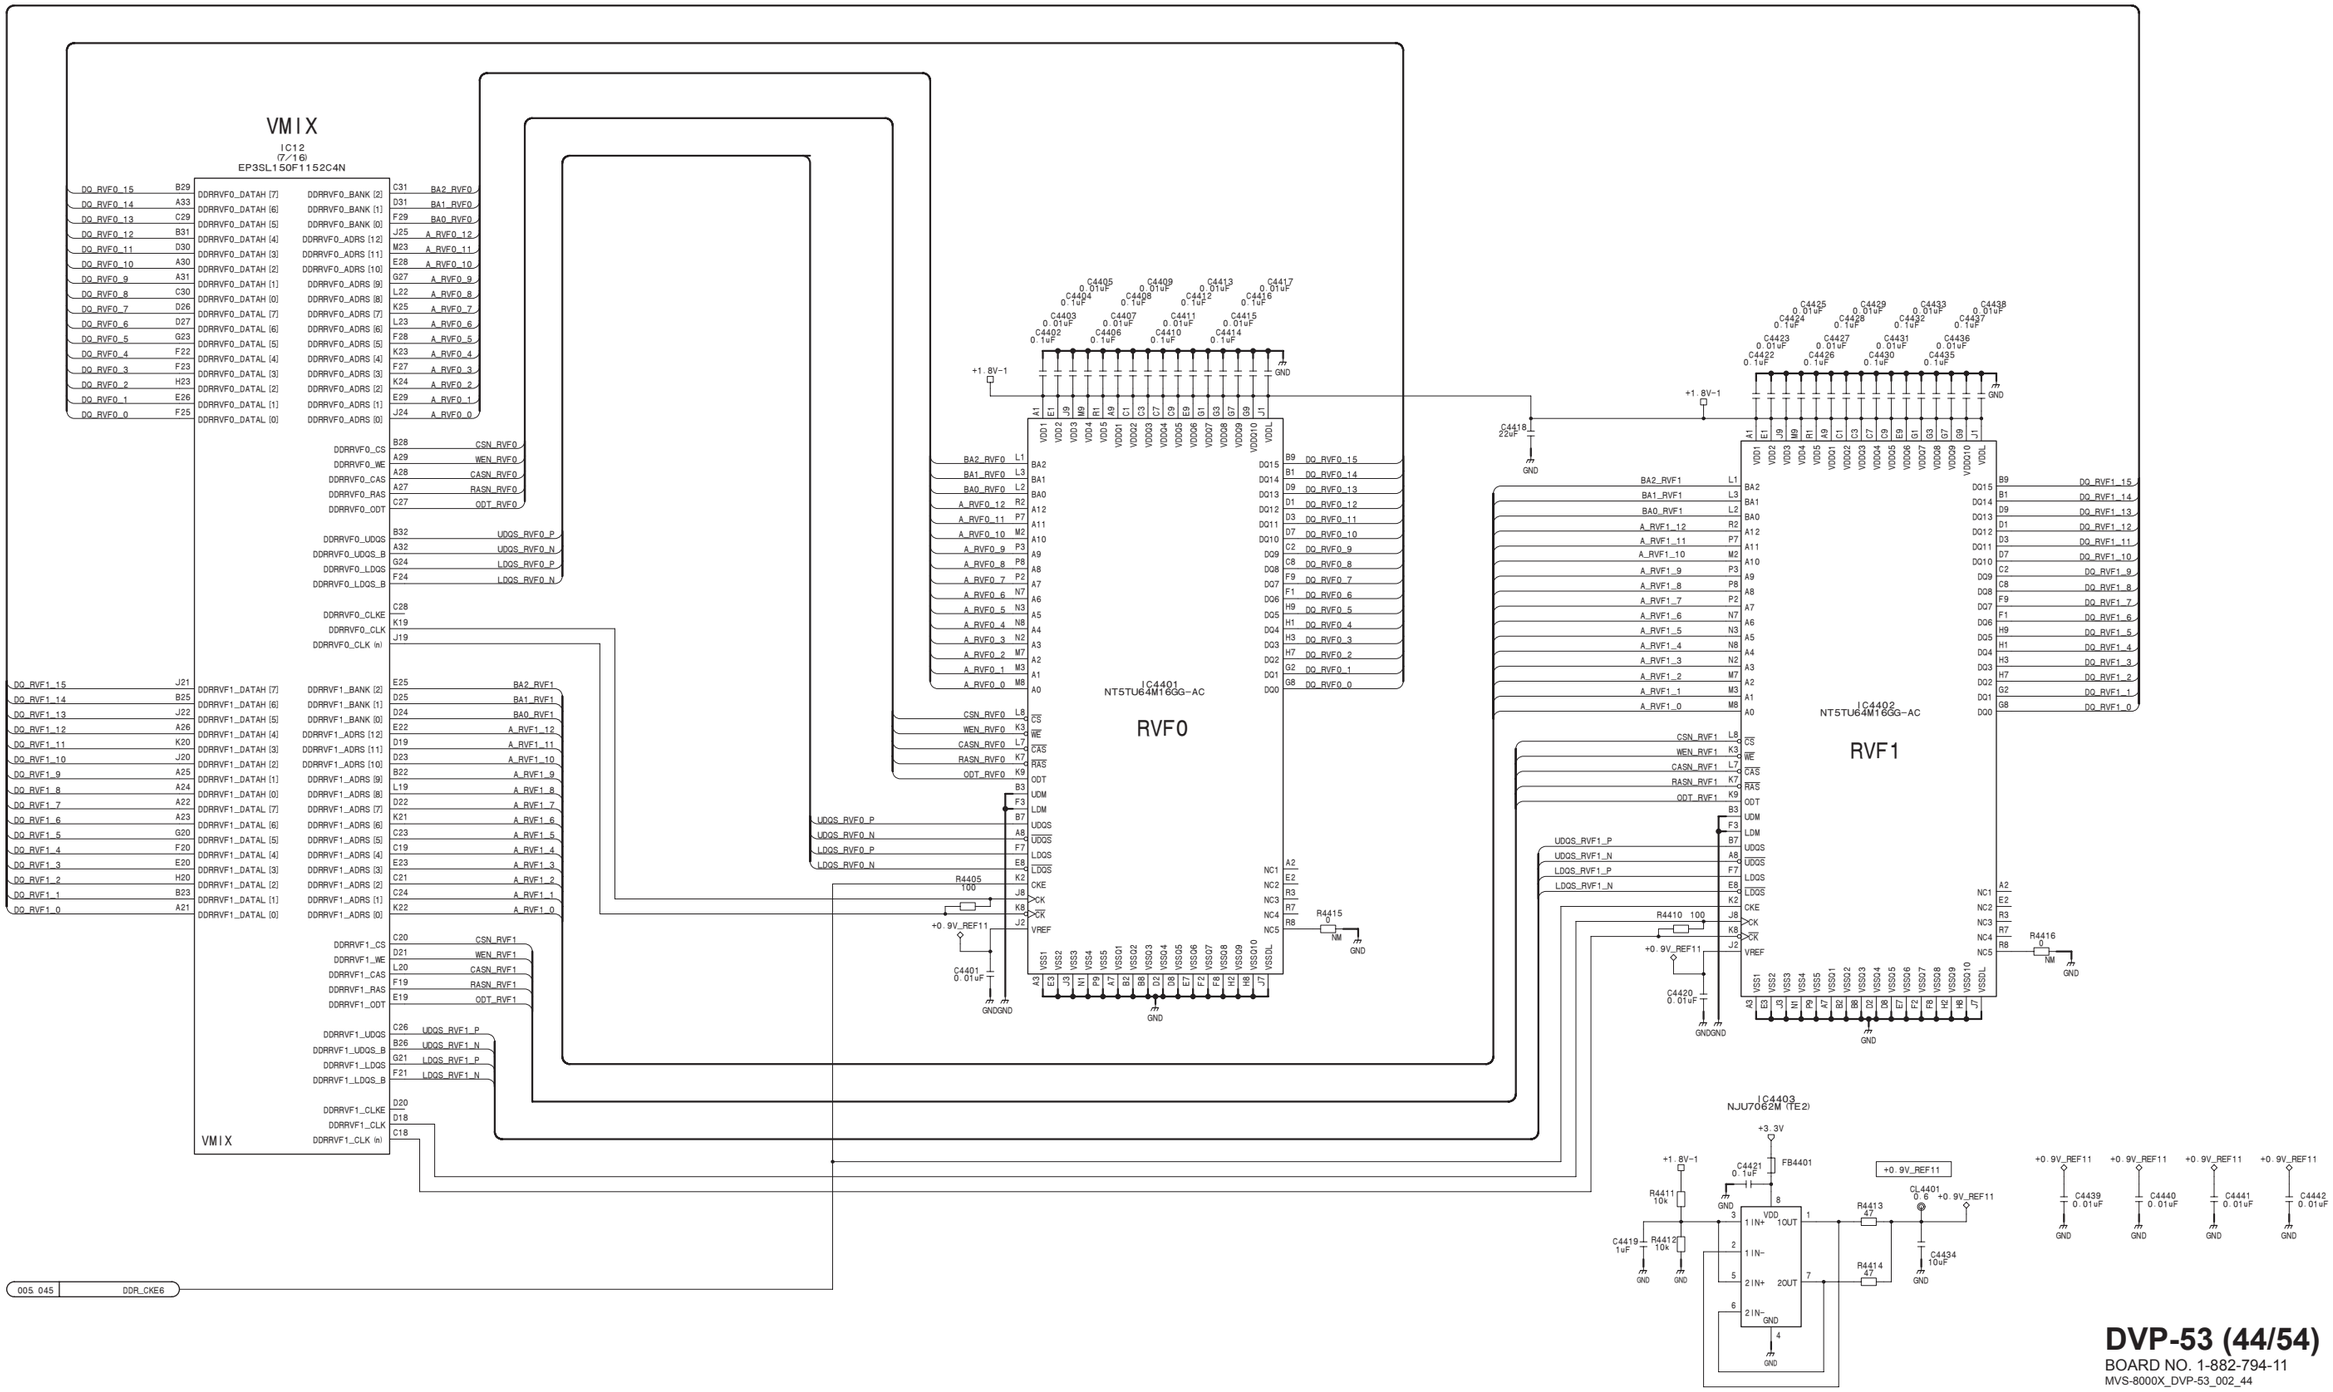

DVP-53 (44/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_44

DVP-53 (45/54)
SUFFIX: -11

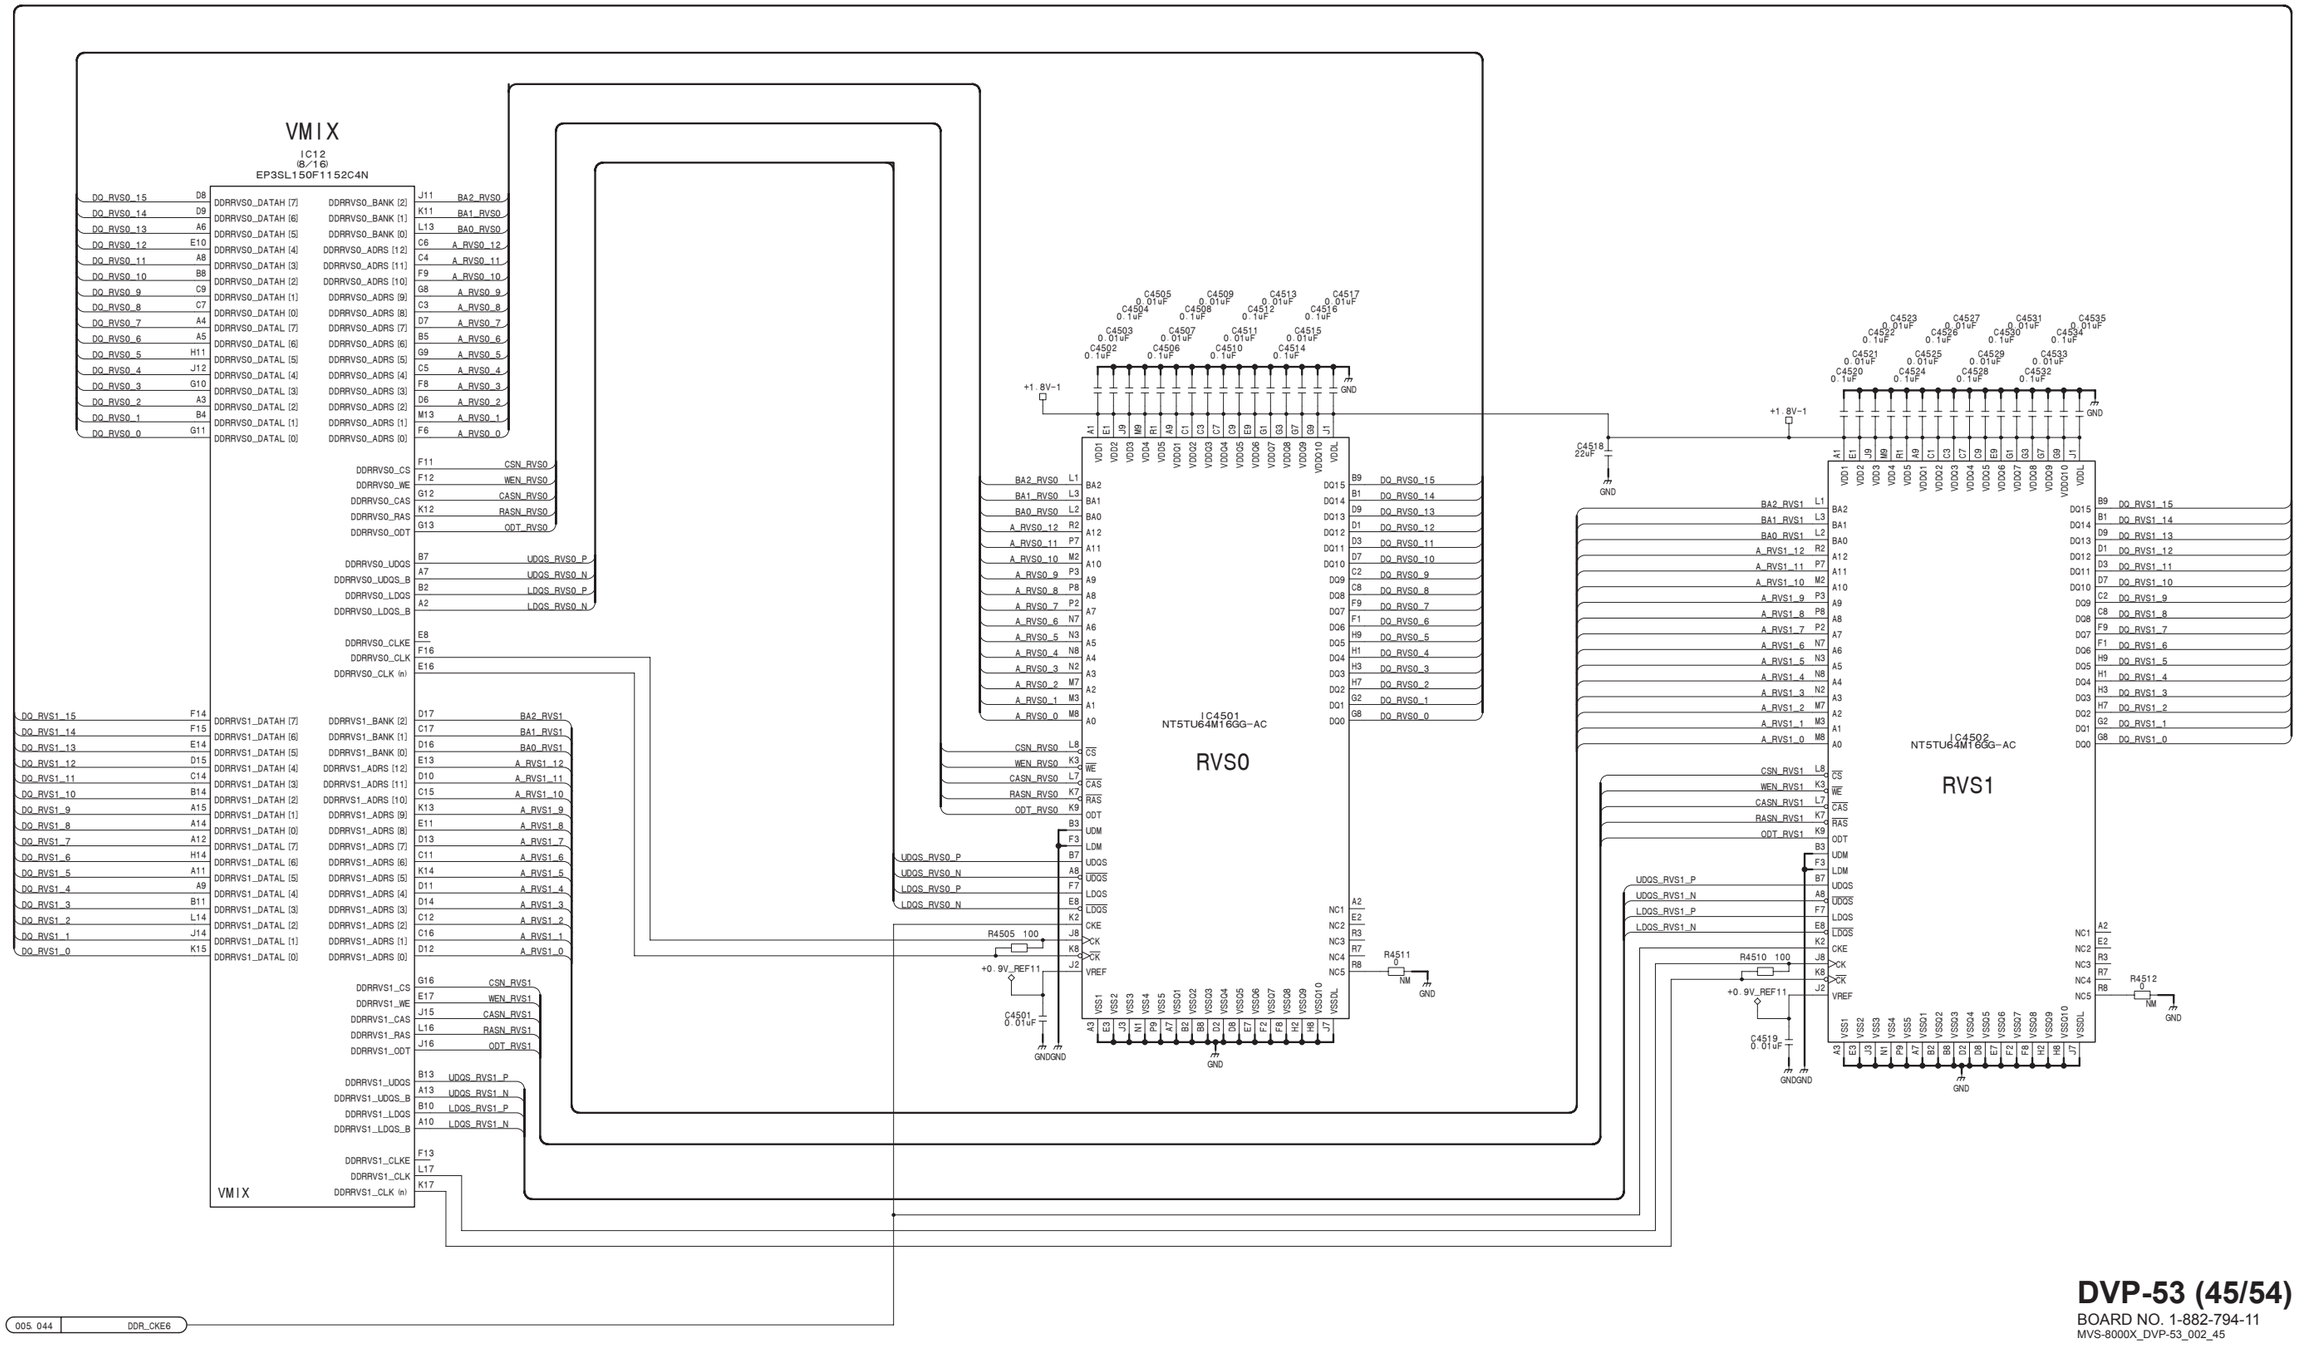

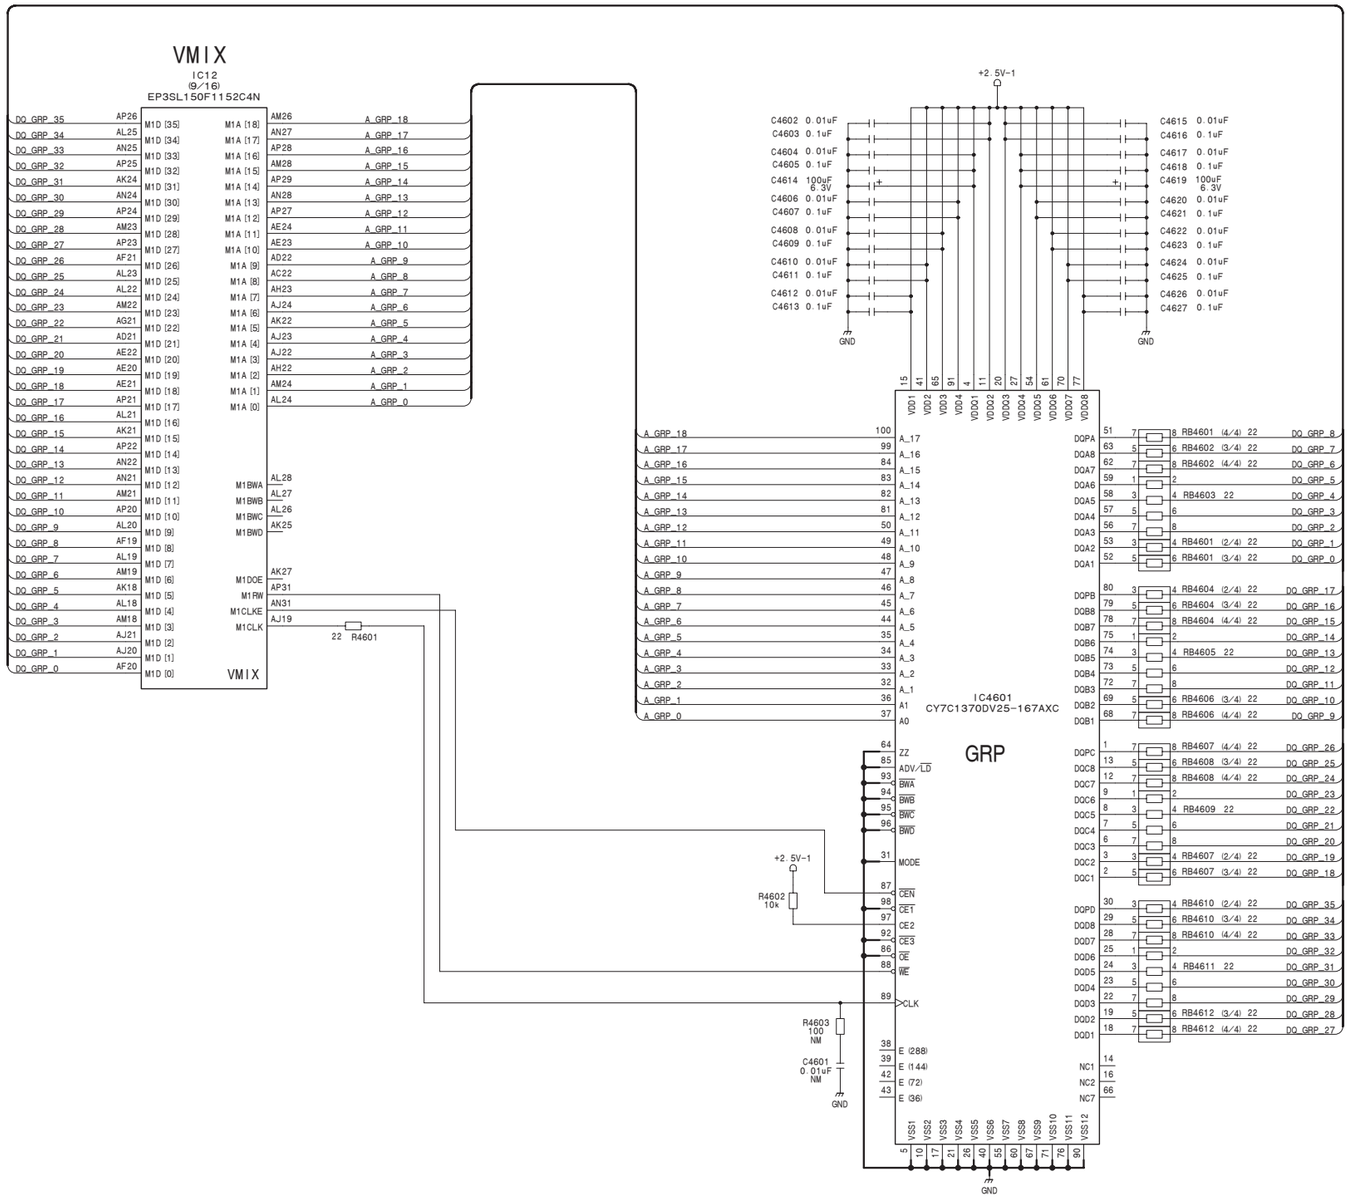



DVP-53 (46/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_46

DVP-53 (47/54)
SUFFIX: -11

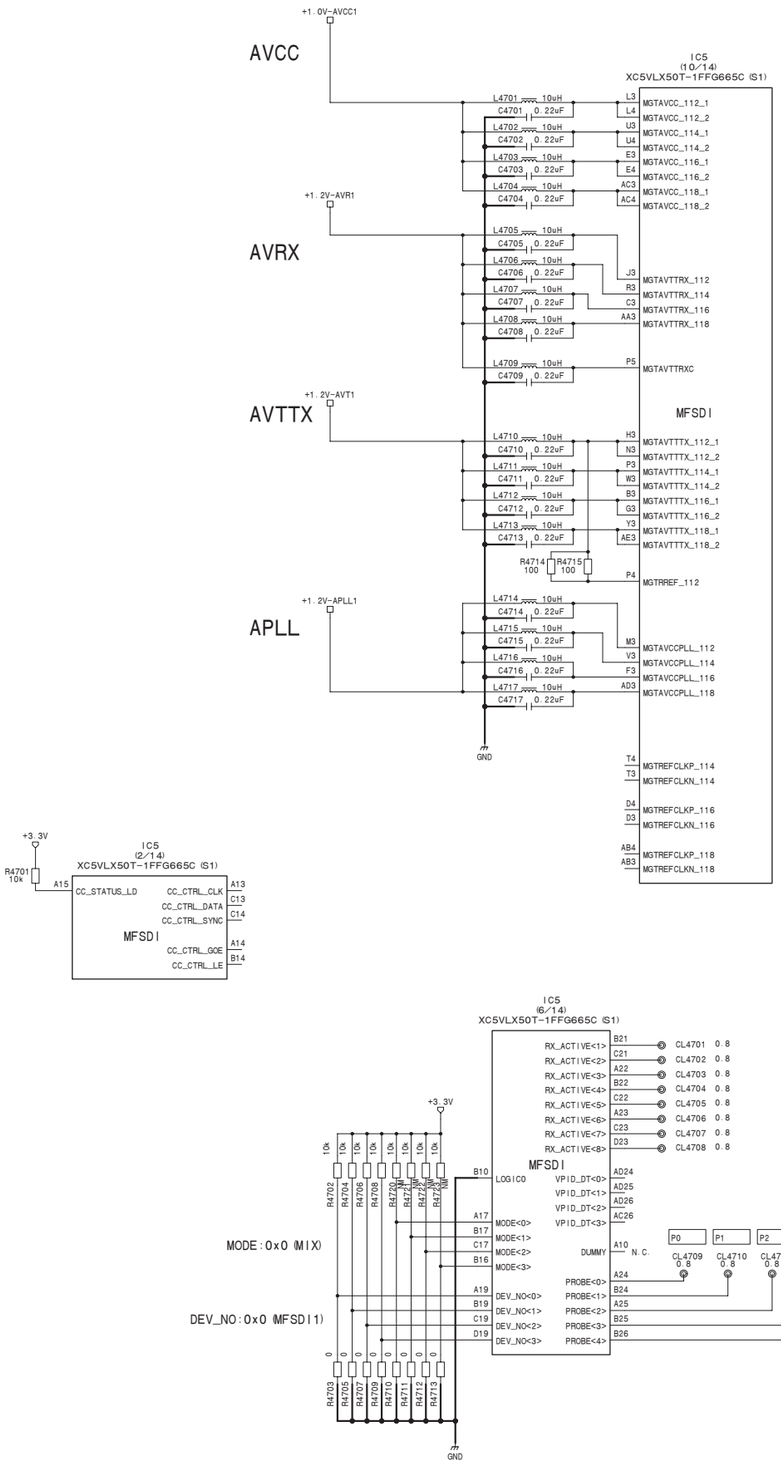

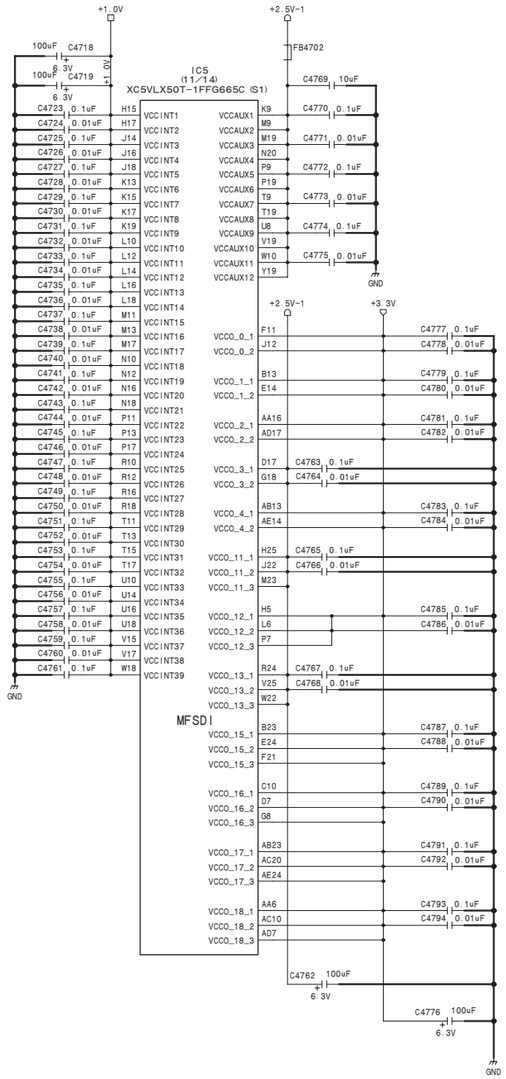

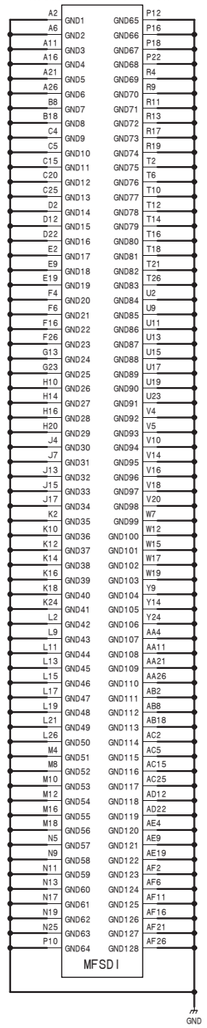

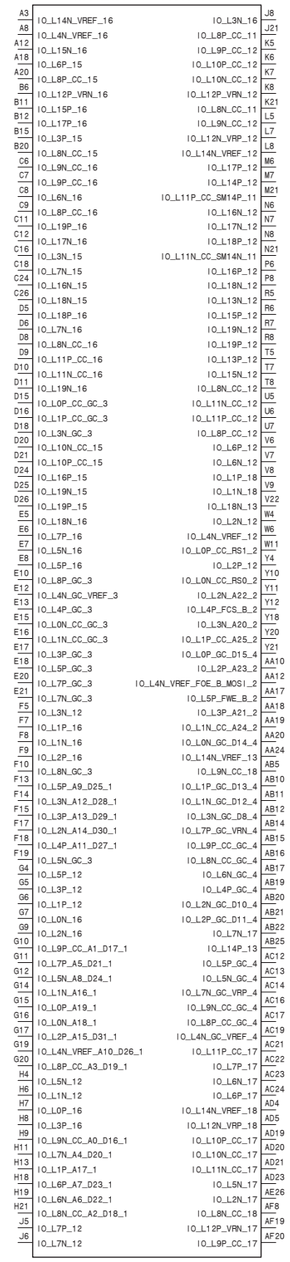

DVP-53 (47/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_47

DVP-53 (48/54)
SUFFIX: -11

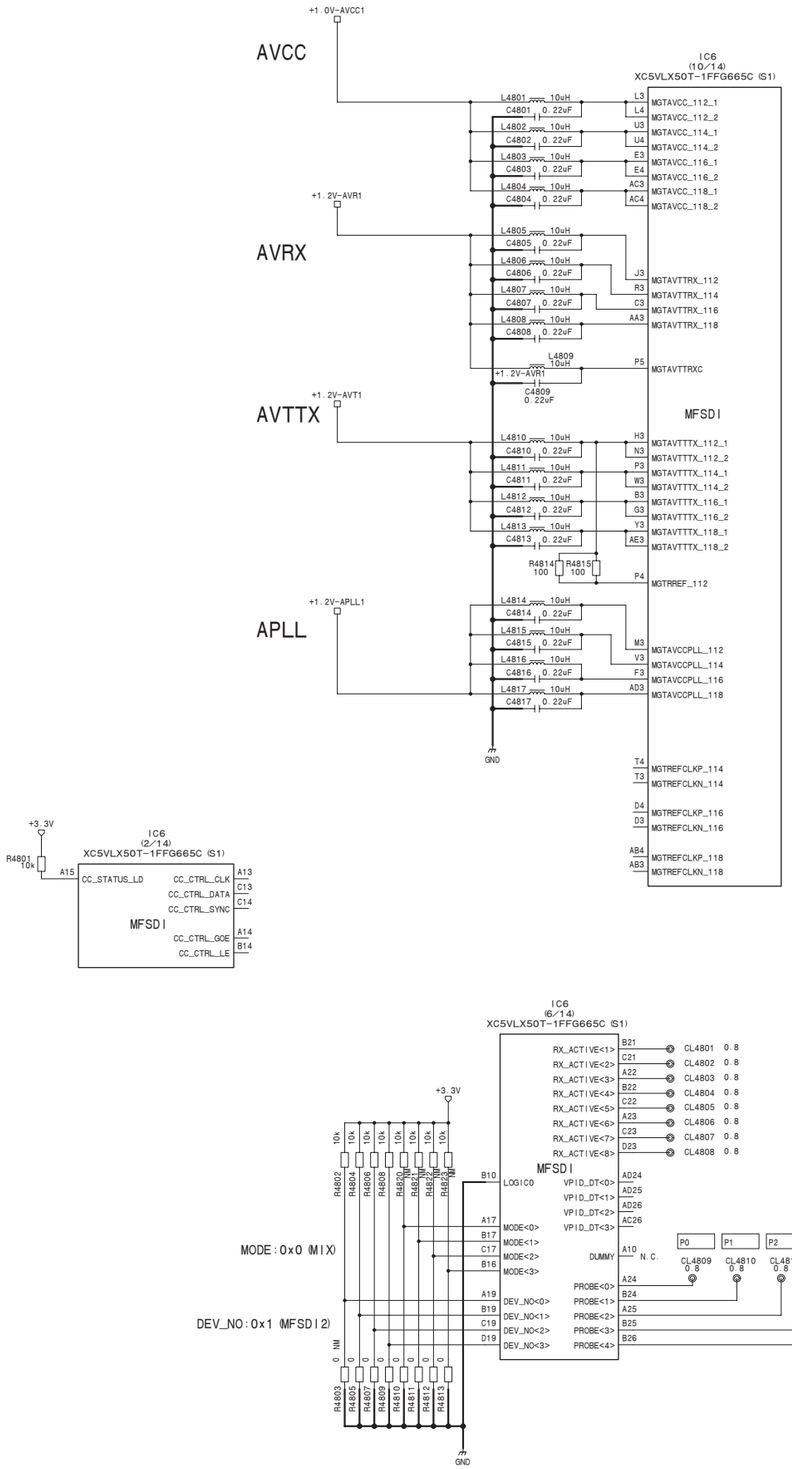

DVP-53 (48/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_48

DVP-53 (49/54)
SUFFIX: -11

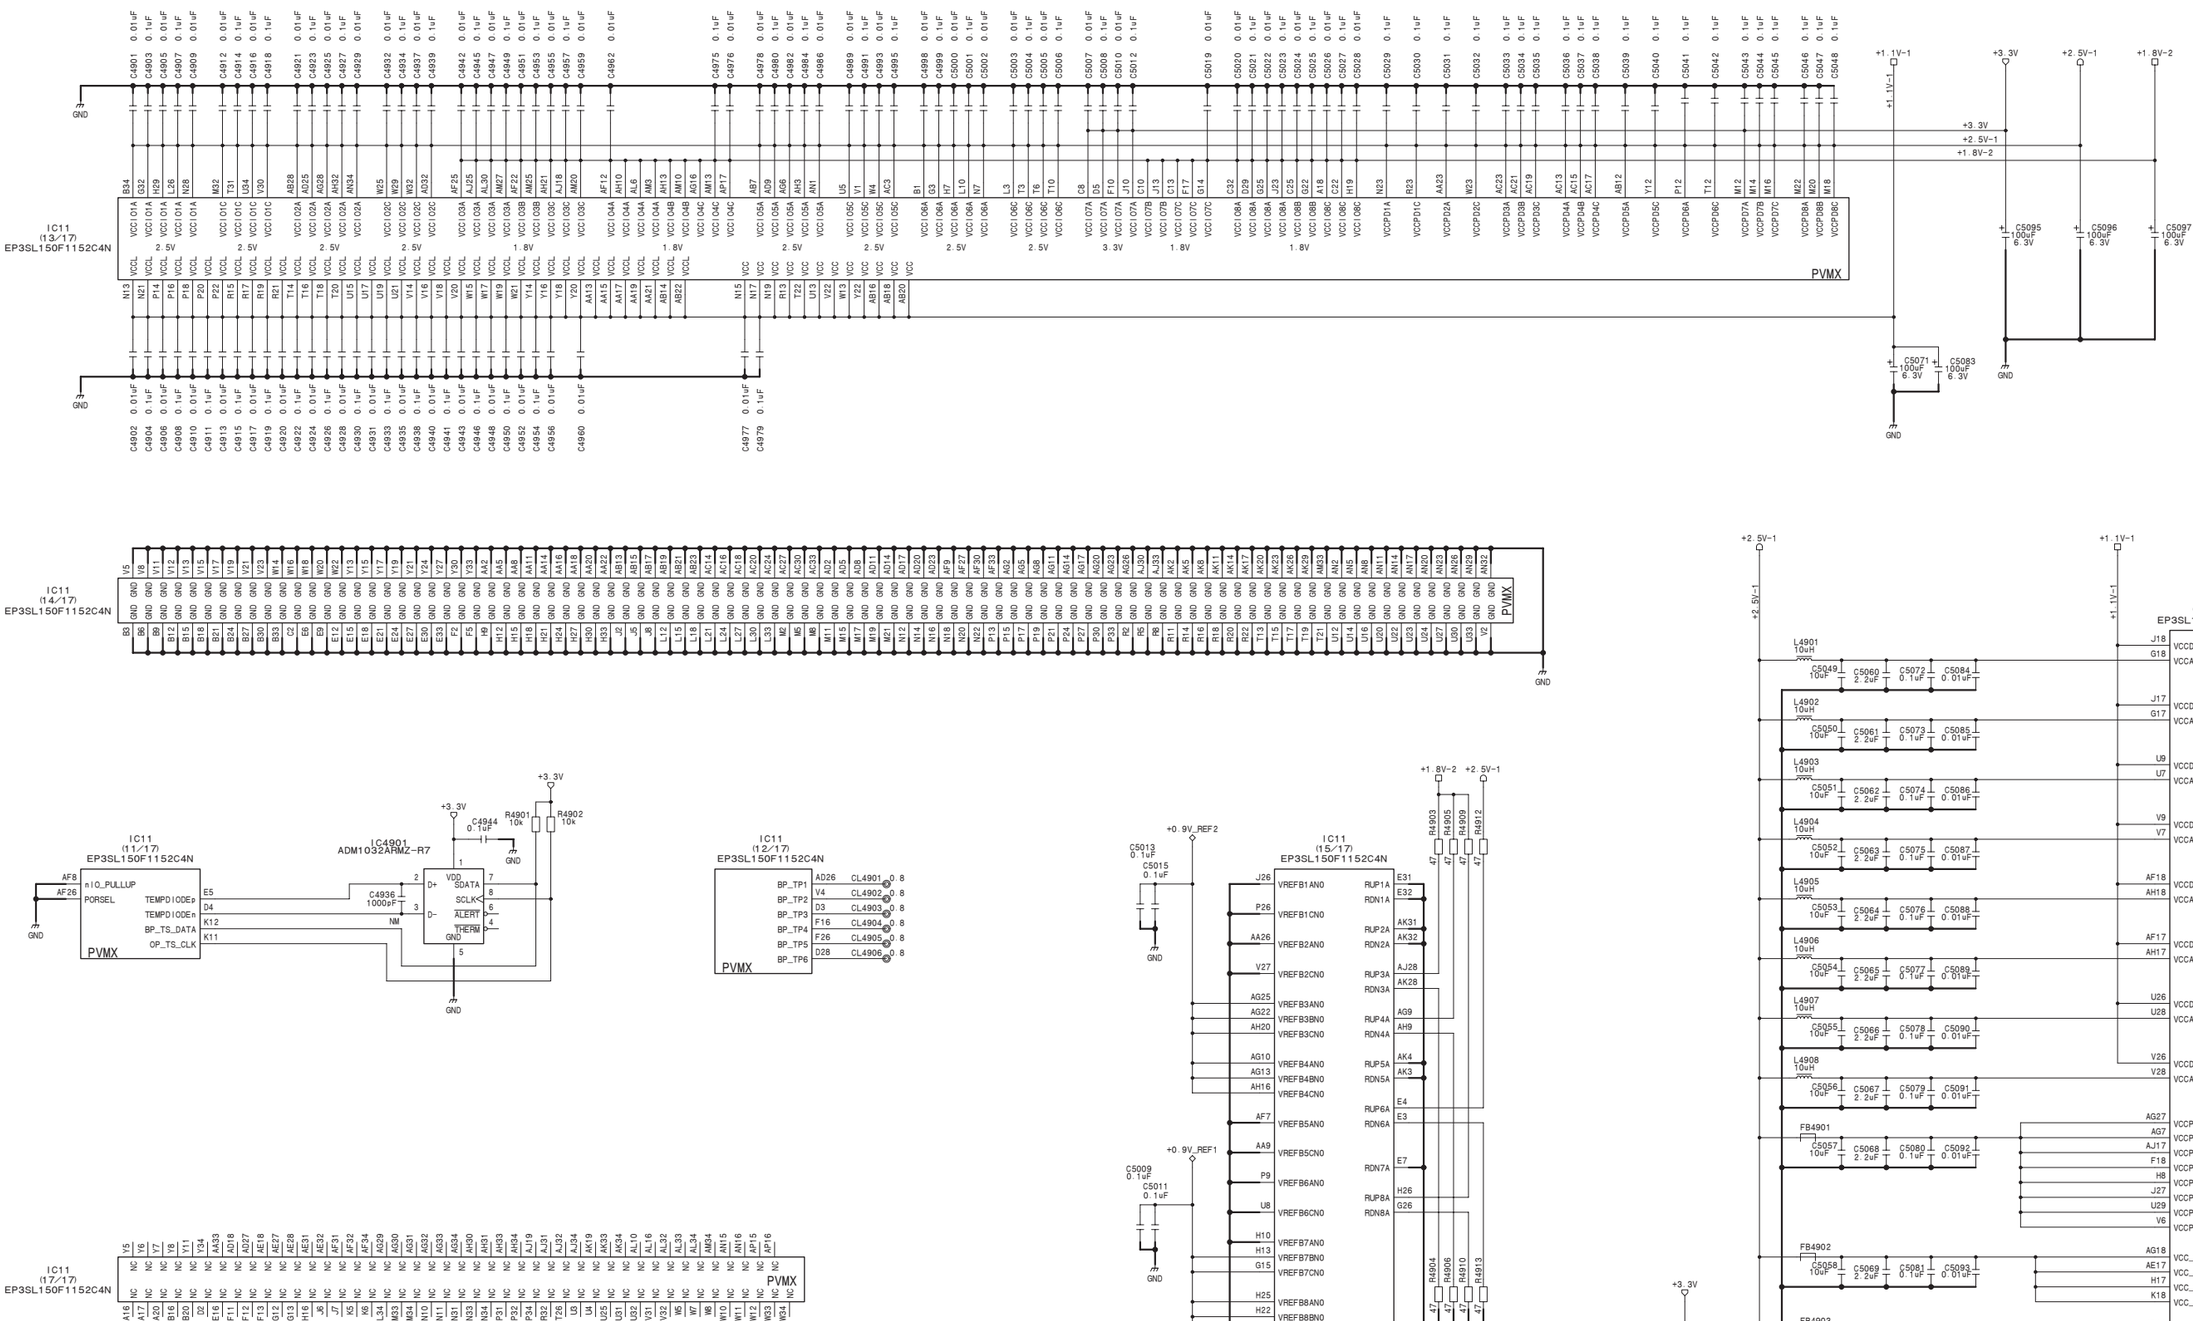

DVP-53 (50/54)
SUFFIX: -11

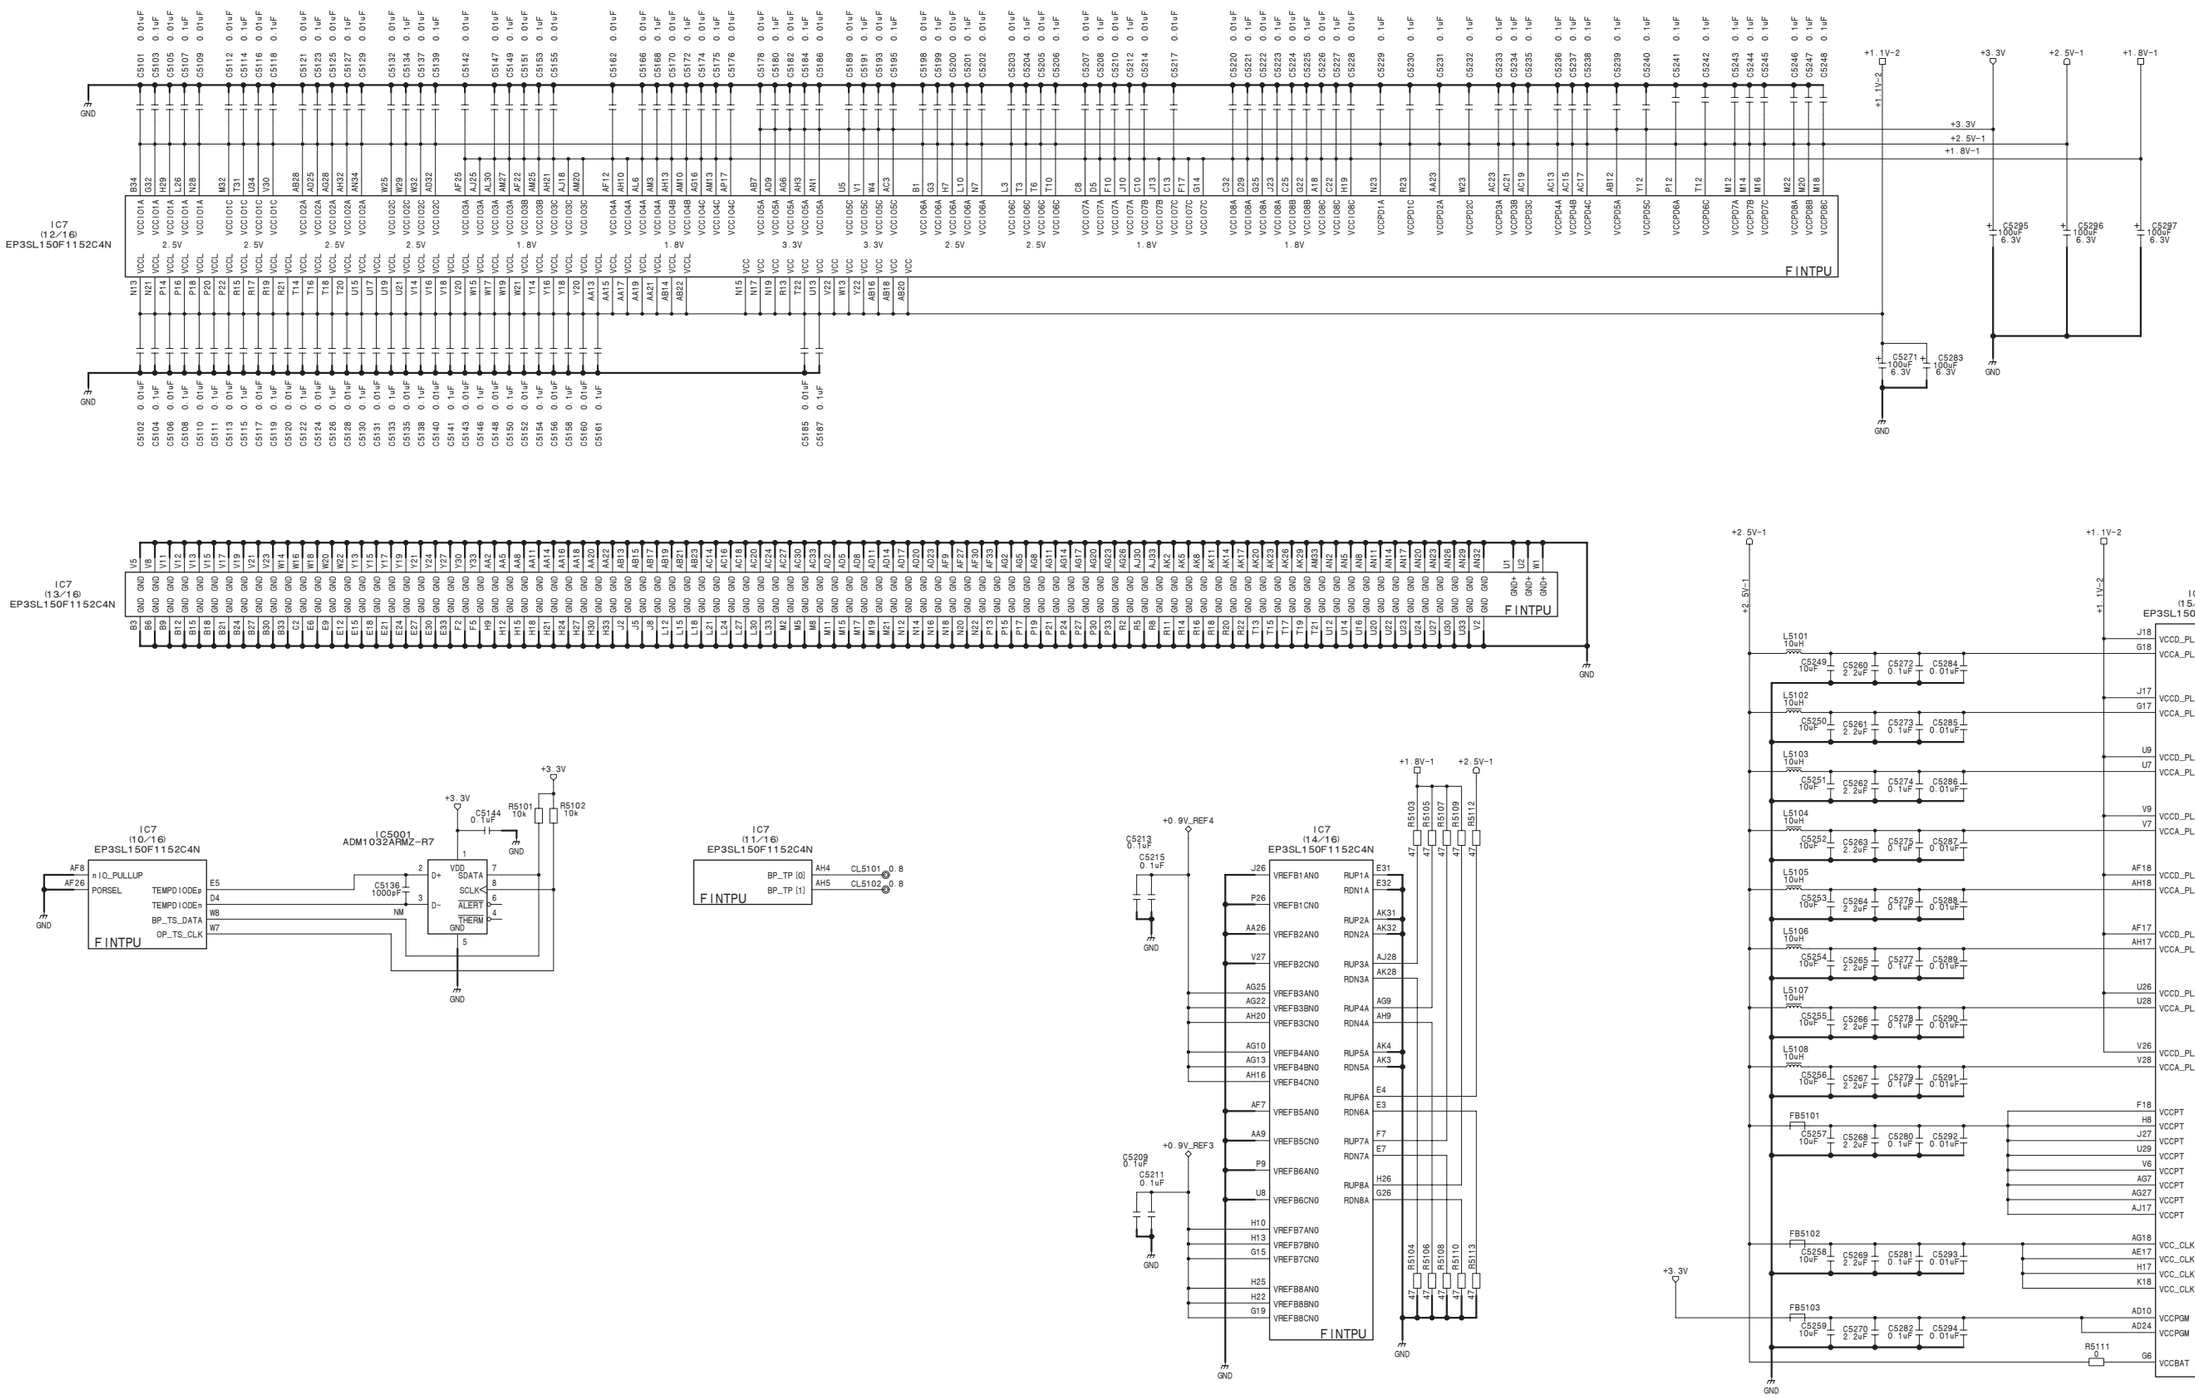

DVP-53 (50/54)
BOARD NO. 1-882-794-11
MVS-8000X_DVP-53_002_50

DVP-53 (51/54)
SUFFIX: -11

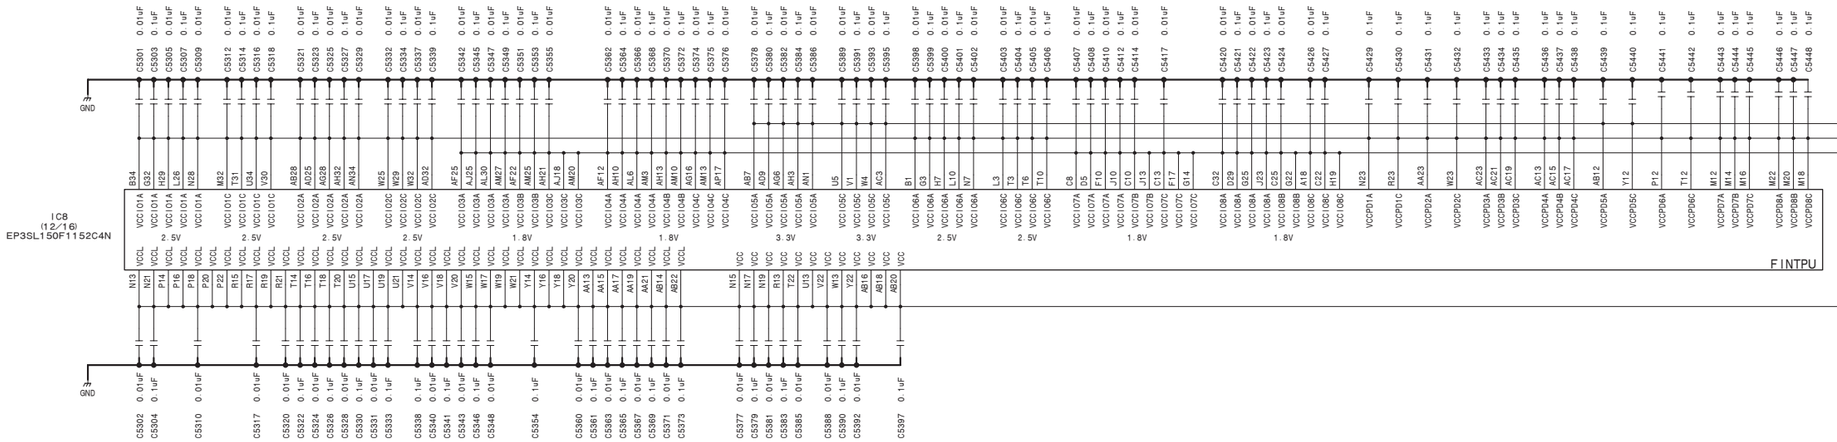

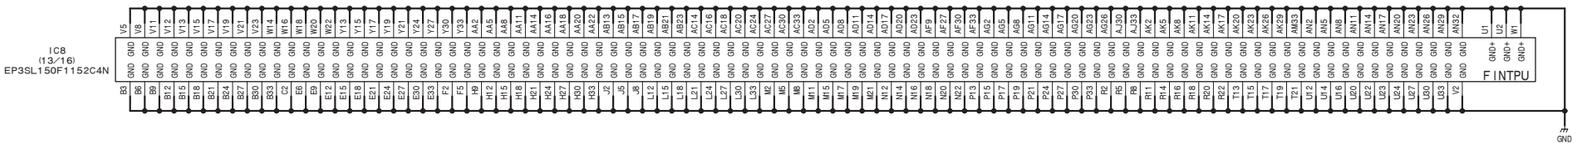

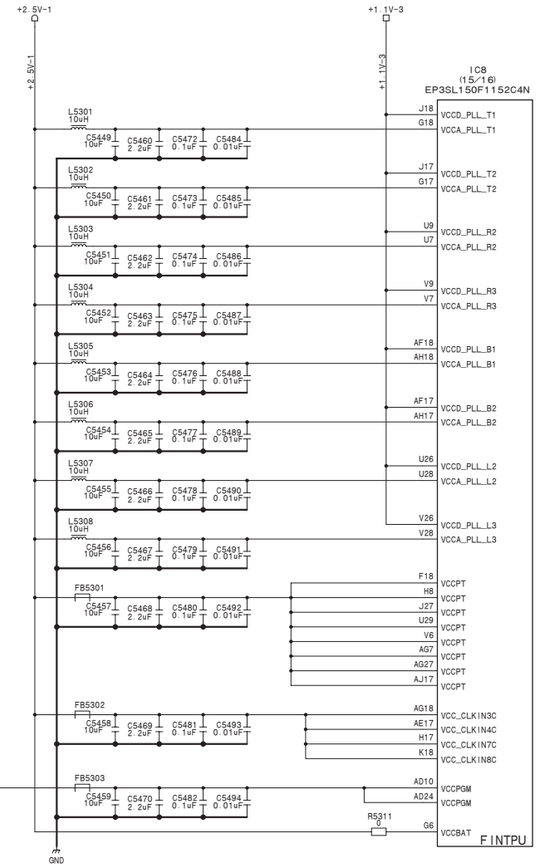

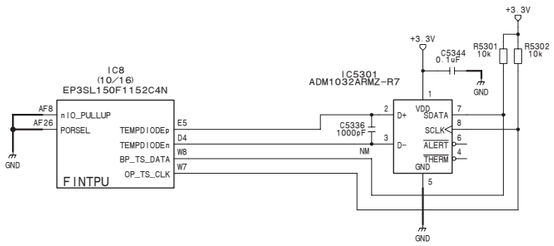



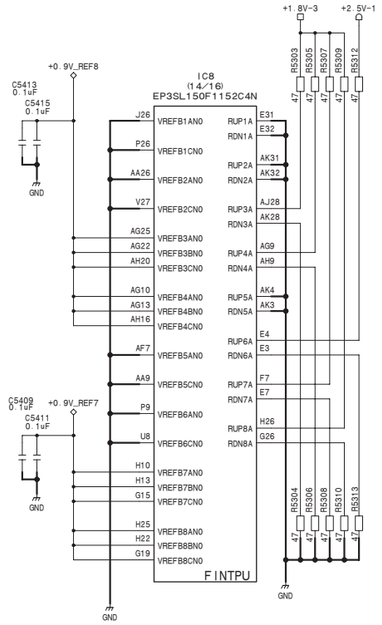

4-420

DVP-53 (52/54)
SUFFIX: -11

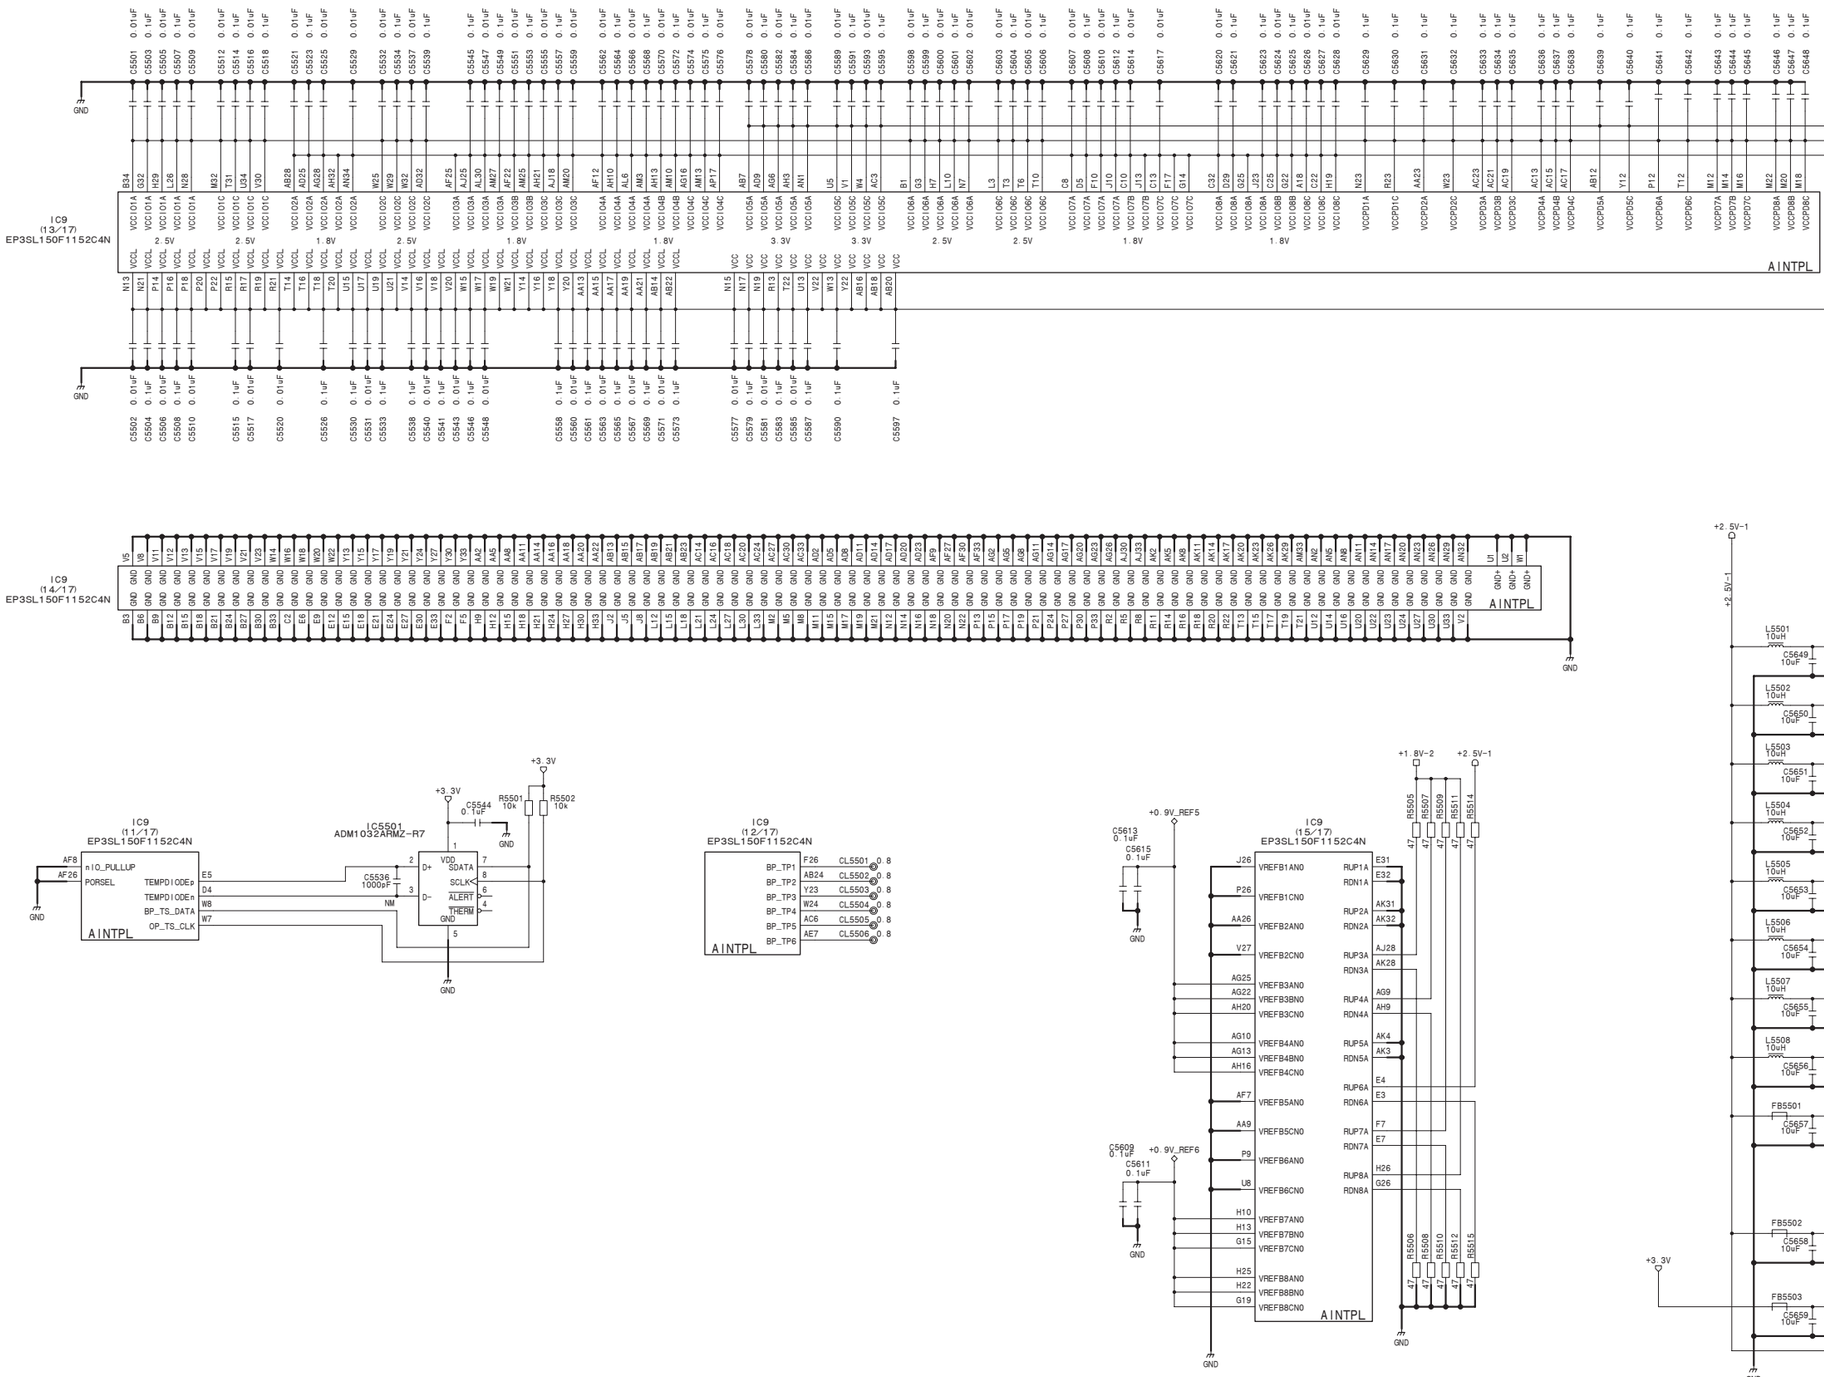

DVP-53 (52/54)

BOARD NO. 1-882-794-11

MVS-8000X_DVP-53_002_52

DVP-53 (53/54)
SUFFIX: -11

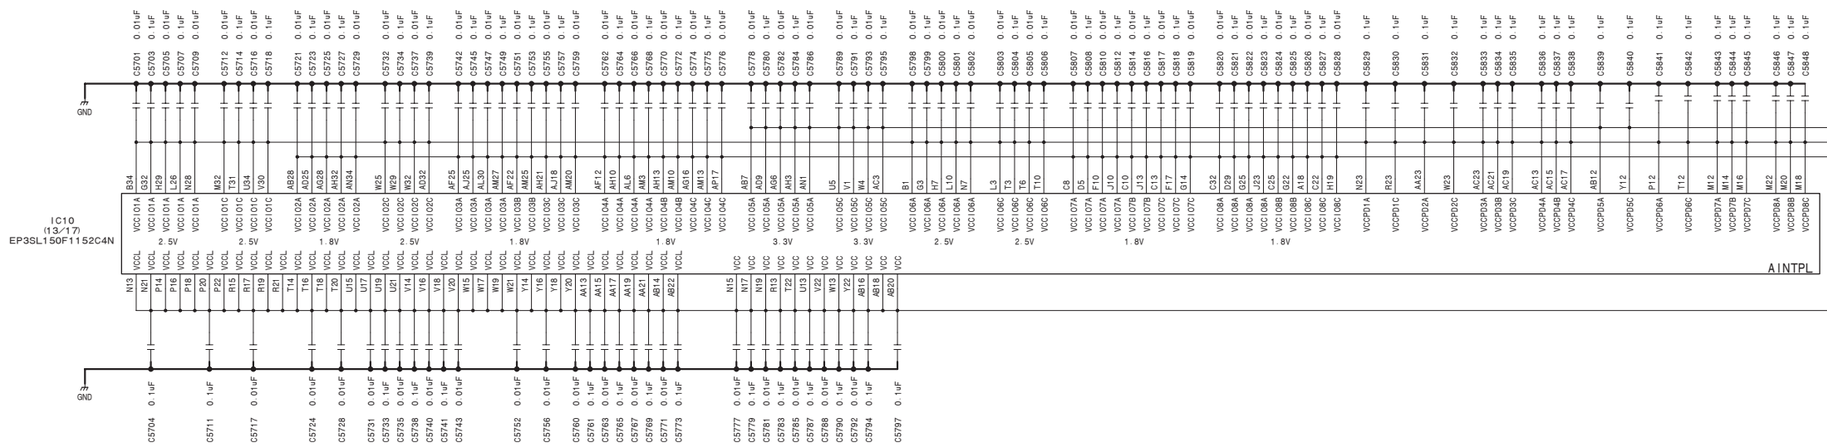

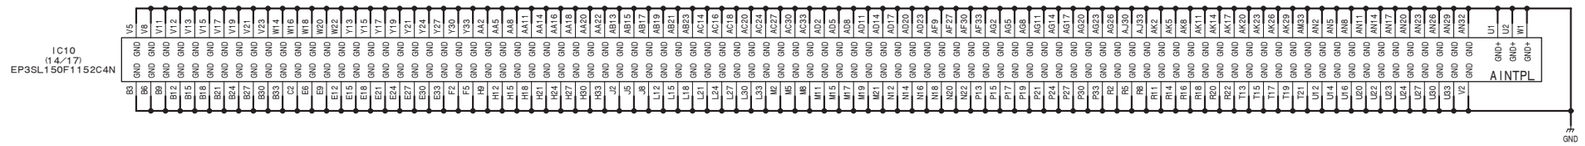

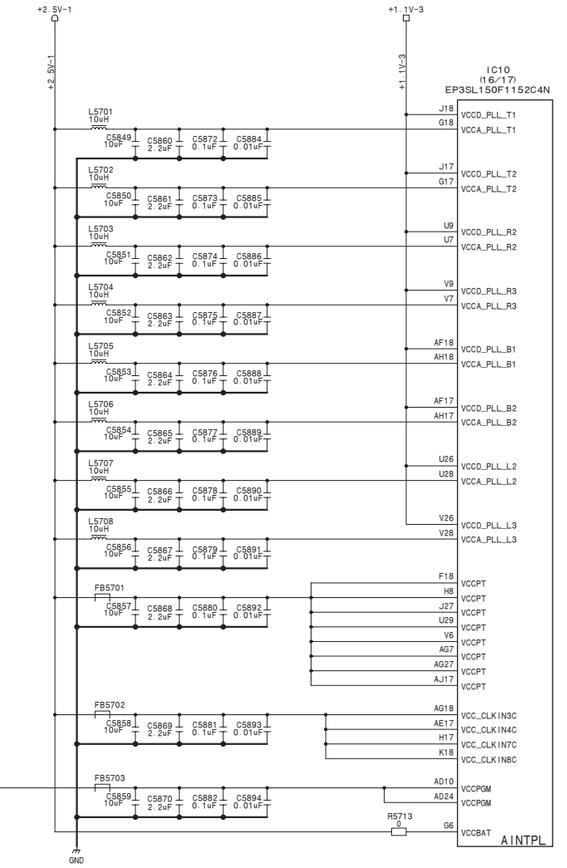

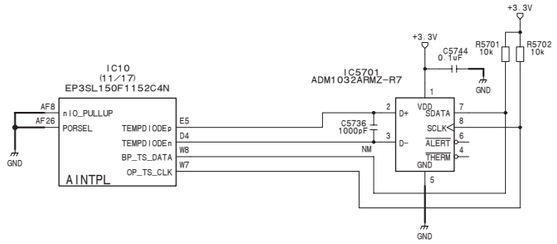



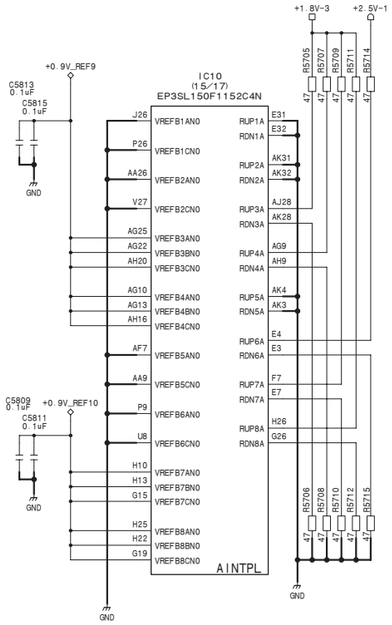

4-422

DVP-53 (54/54)

SUFFIX: -11

DVP-53 (54/54)

SUFFIX: -11

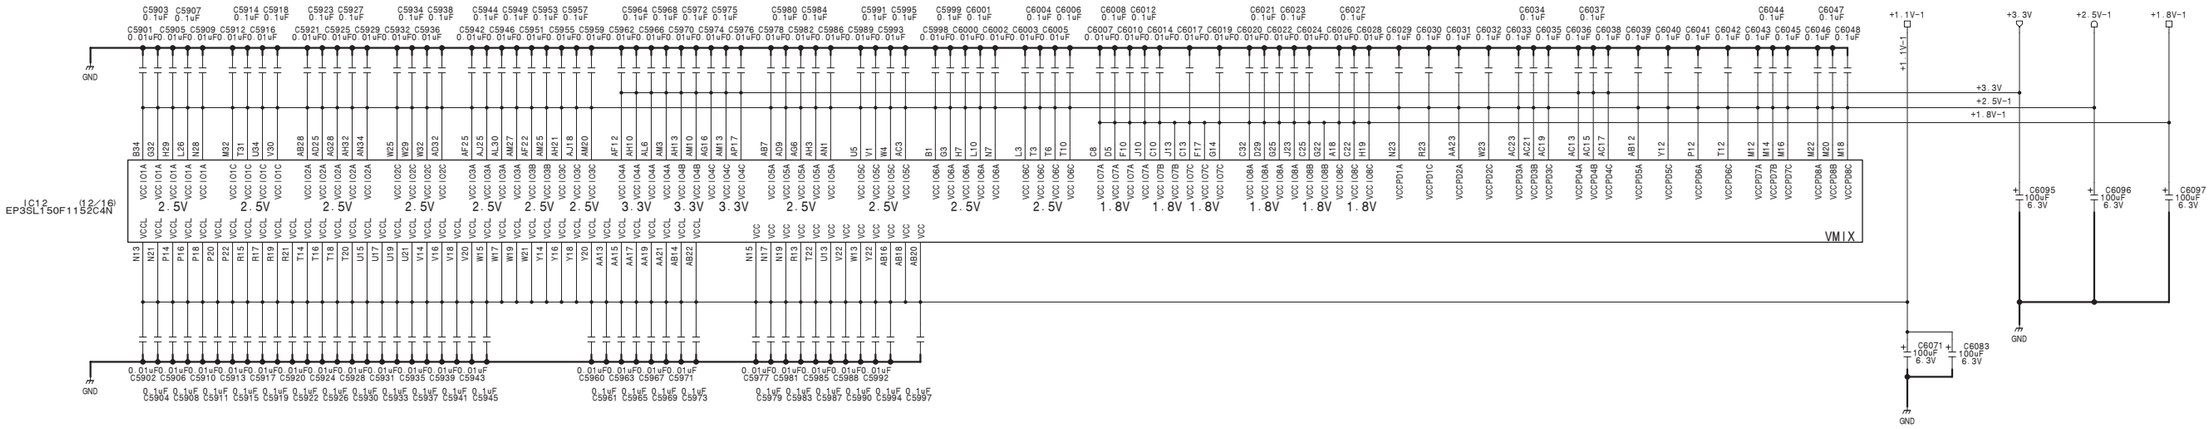

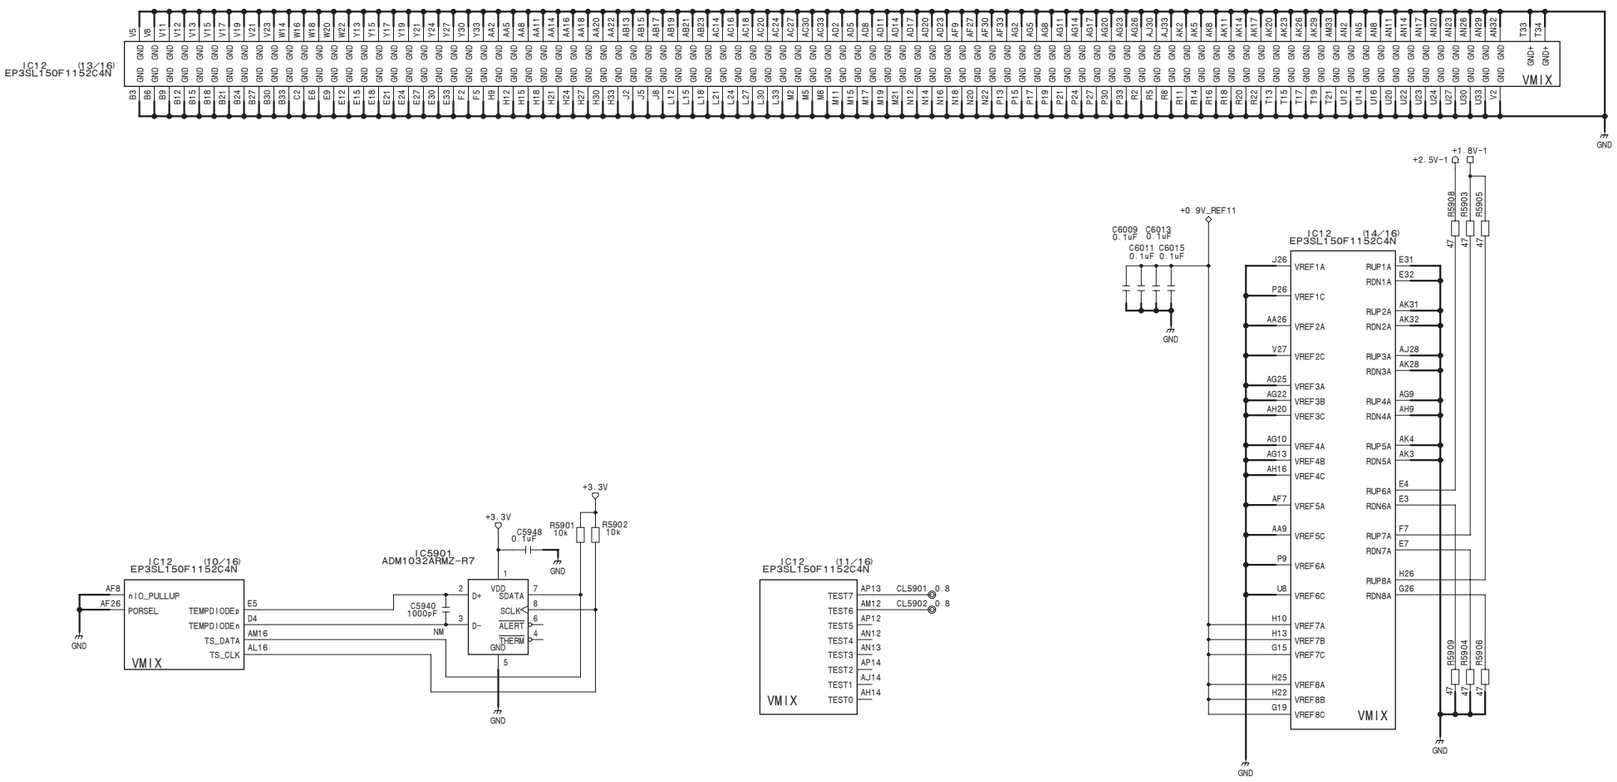

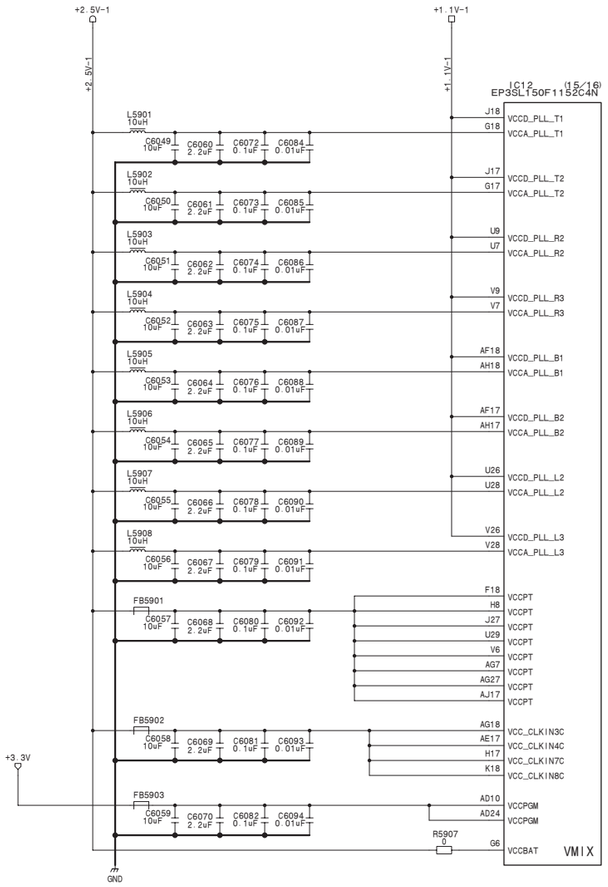



DVP-53 (54/54)

BOARD NO. 1-882-794-11

MVS-8000X_DVP-53_002_54

A B C D E F G H

FC-112 (1/40)
SUFFIX: -12

A SIDE FC-112

CNB1

	A	B	BG	C	D	DG
1	+12V	+12V	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V	+12V	+12V
4						
5	RESET	DC_ENBL	GND	(*X for CN1)	FUSE+12V	GND
6	GND (BD_EXT_10F)	(BD_EXT_10R)	GND	(CN1_I2C_SCL)	(CN1_I2C_SDA)	GND
7	SLOT0	SLOT1	GND	SLOT2	SLOT3	GND
8	SLOT4	SLOT5	GND	SLOT6	SLOT7	GND
9	VCLKP	VCLKN	GND	XPT_I2C_SCL	XPT_I2C_SDA	GND
10	FDOP	FDON	GND	VDOP	VDON	GND

CNC1

	A	B	BG	C	D	DG
1	XPT_ADRS0	XPT_ADRS1	GND	XPT_ADRS2	XPT_ADRS3	GND
2	XPT_ADRS4	XPT_ADRS5	GND	XPT_ADRS6	XPT_ADRS7	GND
3	XPT_ADRS8	XPT_ADRS9	GND	XPT_ADRS10	XPT_ADRS11	GND
4	XPT_ADRS12	XPT_ADRS13	GND	XPT_ADRS14	XPT_ADRS15	GND
5	XPT_DATA0	XPT_DATA1	GND	XPT_DATA2	XPT_DATA3	GND
6	XPT_DATA4	XPT_DATA5	GND	XPT_DATA6	XPT_DATA7	GND
7	XPT_DATA8	XPT_DATA9	GND	XPT_DATA10	XPT_DATA11	GND
8	XPT_DATA12	XPT_DATA13	GND	XPT_DATA14	XPT_DATA15	GND
9	XPT_CLK3p	XPT_CLK3n	GND	XPT_CS3An	XPT_CS3Bn	GND
10	XPT_WE3n	XPT_WAIT3n	GND	XPT_OEn	XPT_RESET1n	GND

CNL1

	A	B	BG	C	D	DG
1			GND			GND
2			GND	FC_IN04P	FC_IN04N	GND
3	INFC_OUT04P	INFC_OUT04N	GND	FC_INB04P	FC_INB04N	GND
4			GND	FC_IN03P	FC_IN03N	GND
5	INFC_OUT03P	INFC_OUT03N	GND	FC_INB03P	FC_INB03N	GND
6			GND	FC_IN02P	FC_IN02N	GND
7	INFC_OUT02P	INFC_OUT02N	GND	FC_INB02P	FC_INB02N	GND
8			GND	FC_IN01P	FC_IN01N	GND
9	INFC_OUT01P	INFC_OUT01N	GND	FC_INB01P	FC_INB01N	GND
10			GND			GND

CNE1

	A	B	BG	C	D	DG
1			GND			GND
2			GND	FC_IN08P	FC_IN08N	GND
3	INFC_OUT08P	INFC_OUT08N	GND	FC_INB08P	FC_INB08N	GND
4			GND	FC_IN07P	FC_IN07N	GND
5	INFC_OUT07P	INFC_OUT07N	GND	FC_INB07P	FC_INB07N	GND
6			GND	FC_IN06P	FC_IN06N	GND
7	INFC_OUT06P	INFC_OUT06N	GND	FC_INB06P	FC_INB06N	GND
8			GND	FC_IN05P	FC_IN05N	GND
9	INFC_OUT05P	INFC_OUT05N	GND	FC_INB05P	FC_INB05N	GND
10			GND			GND

HM_Zd CONNECTOR

FC-112 (1/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_1

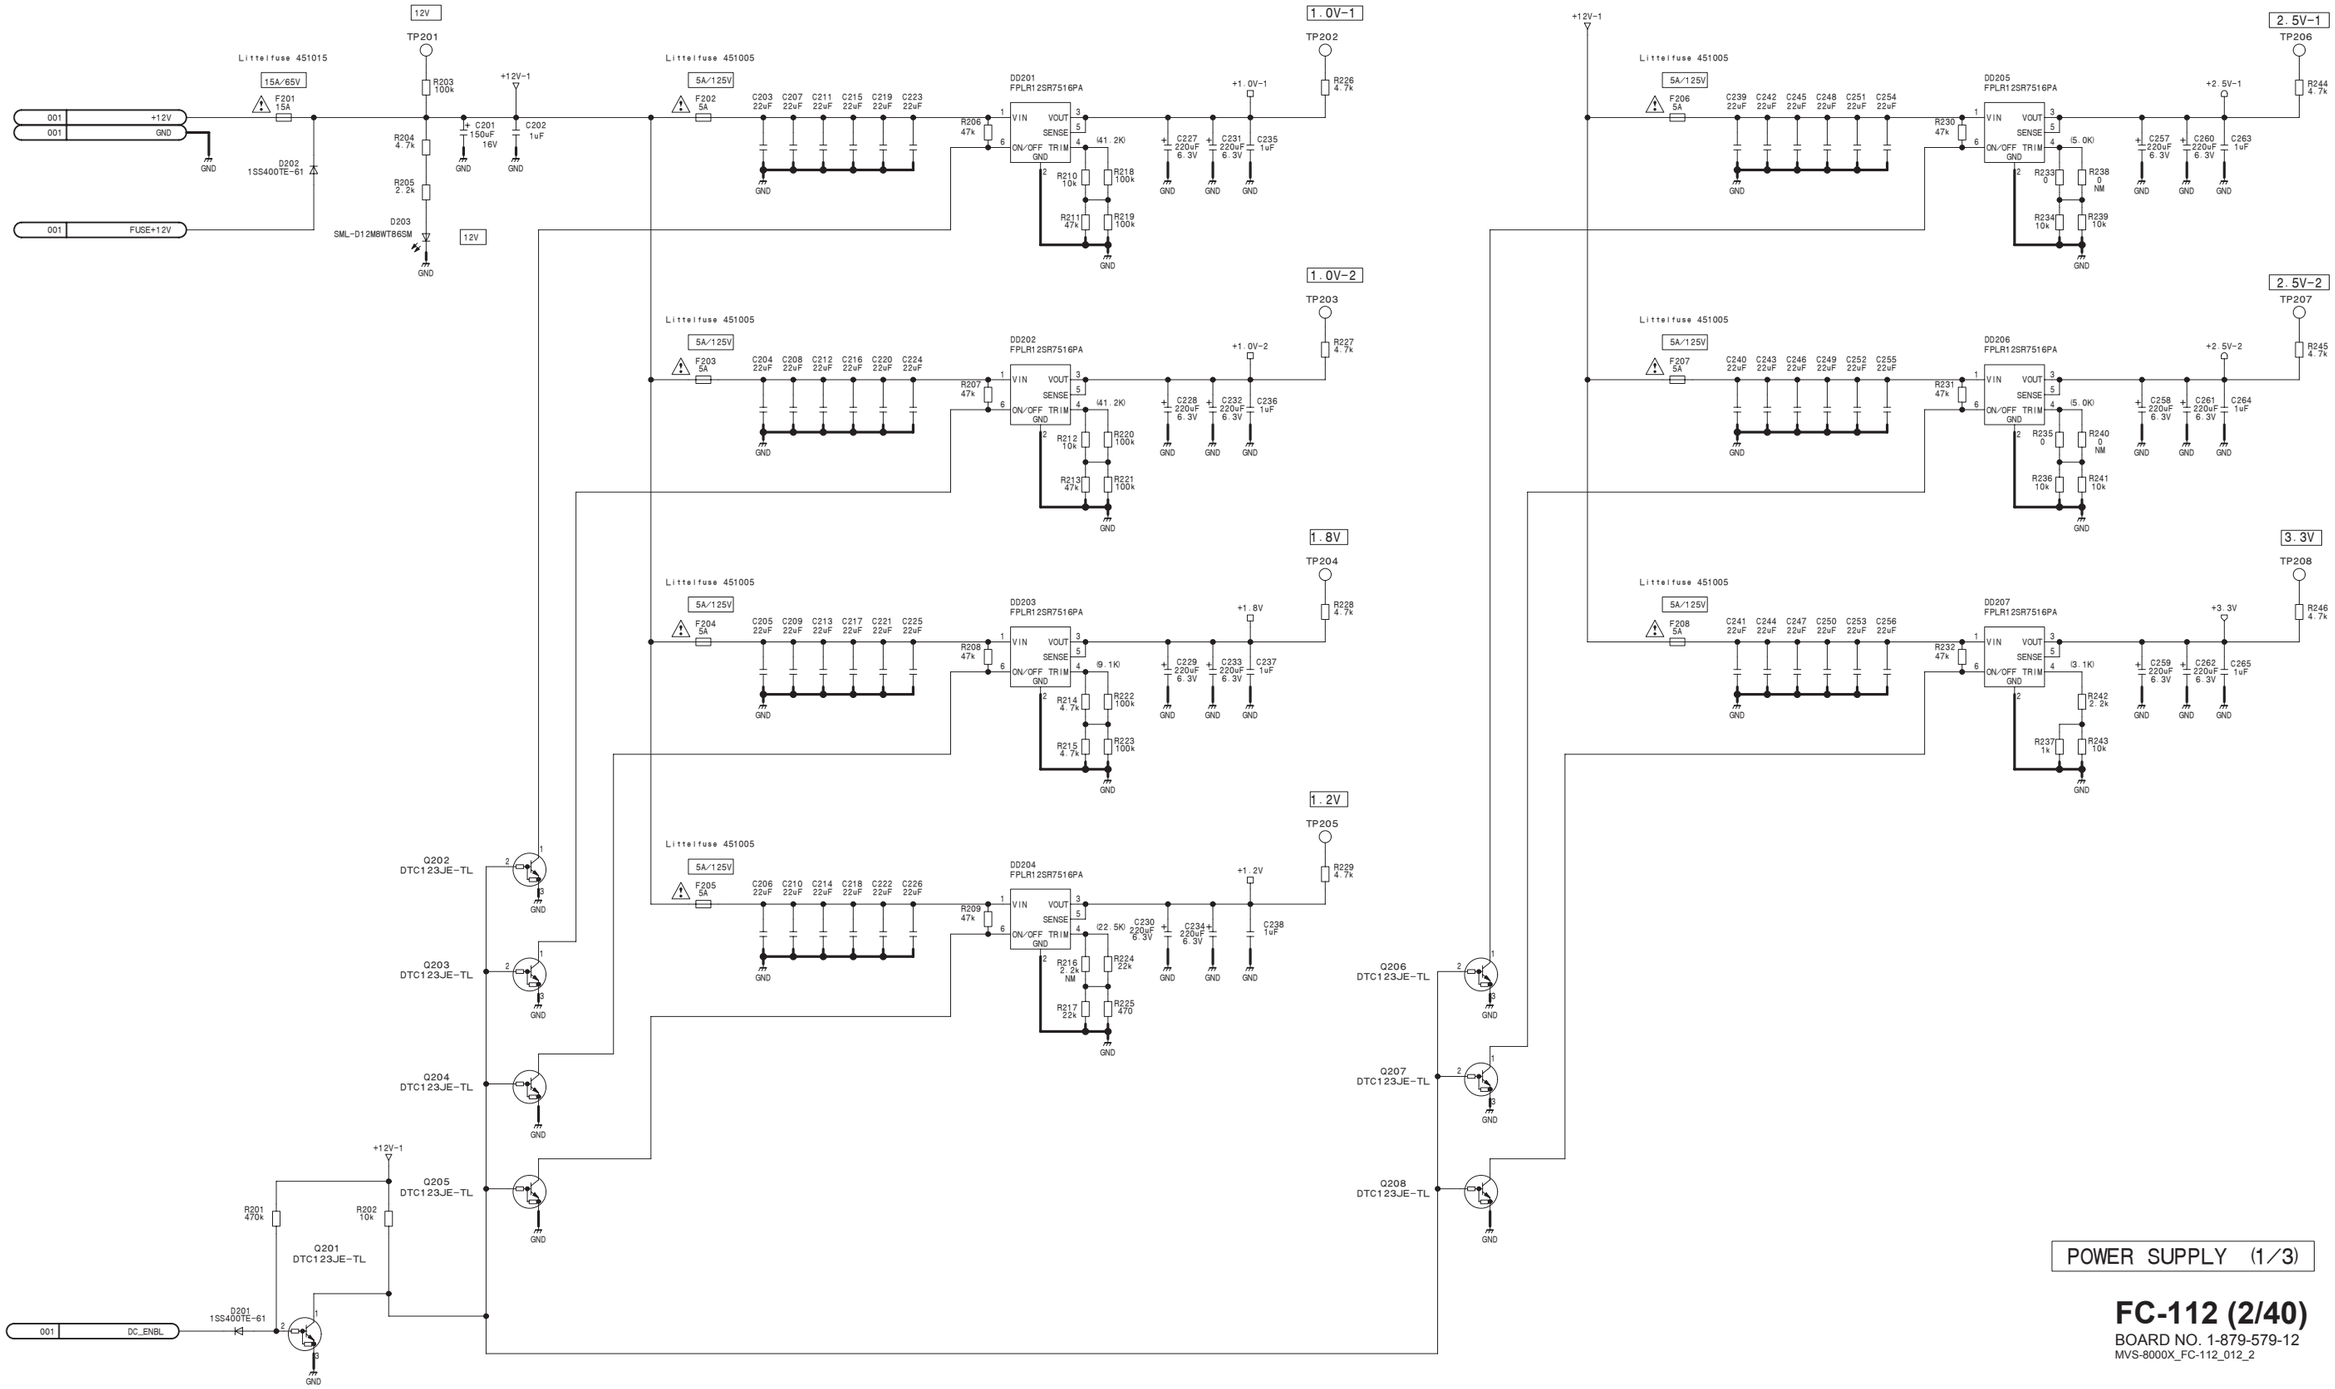

POWER SUPPLY (1/3)

FC-112 (2/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_2

FC-112 (3/40)
SUFFIX: -12

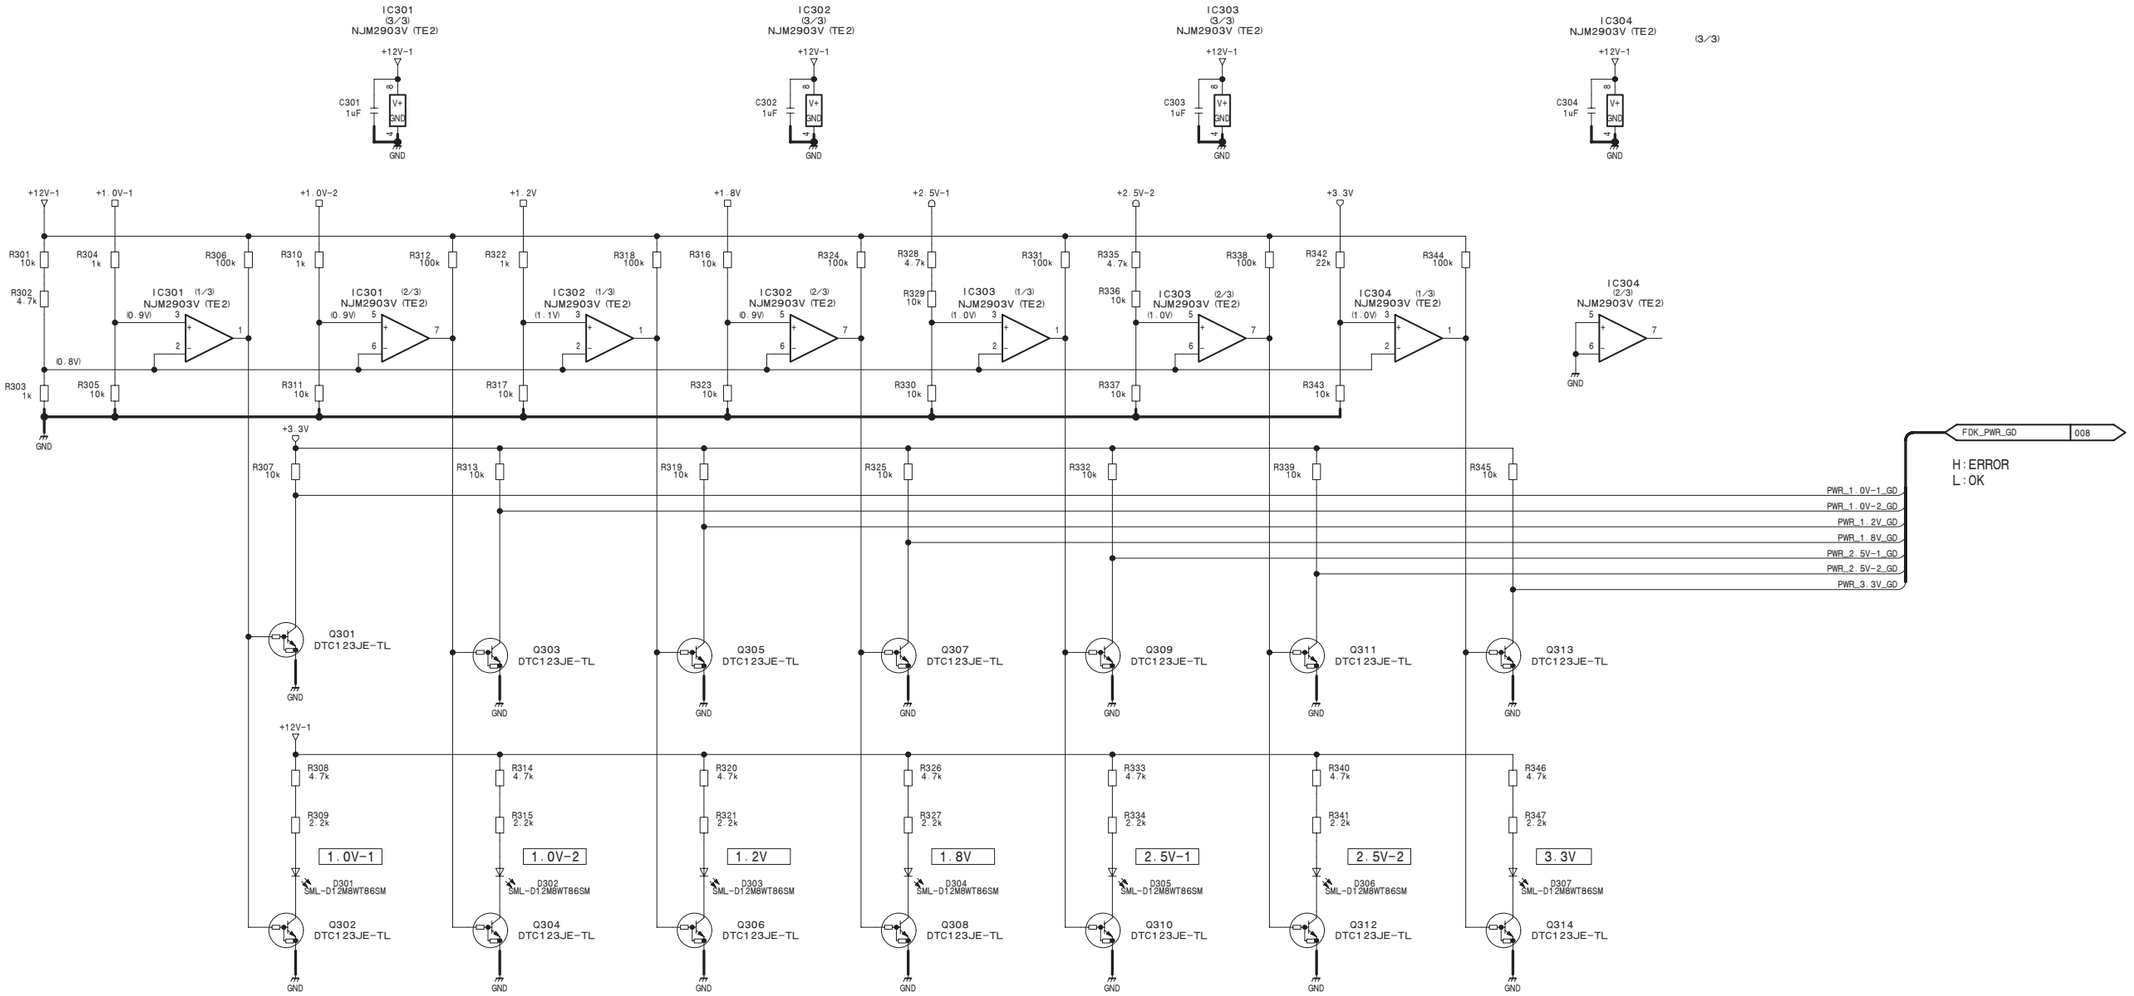

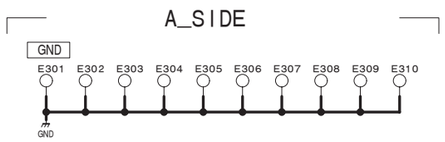

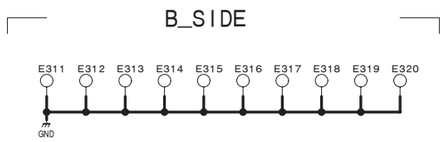

POWER SUPPLY (2/3)

FC-112 (3/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_3

4-426

FC-112 (4/40) SUFFIX: -12

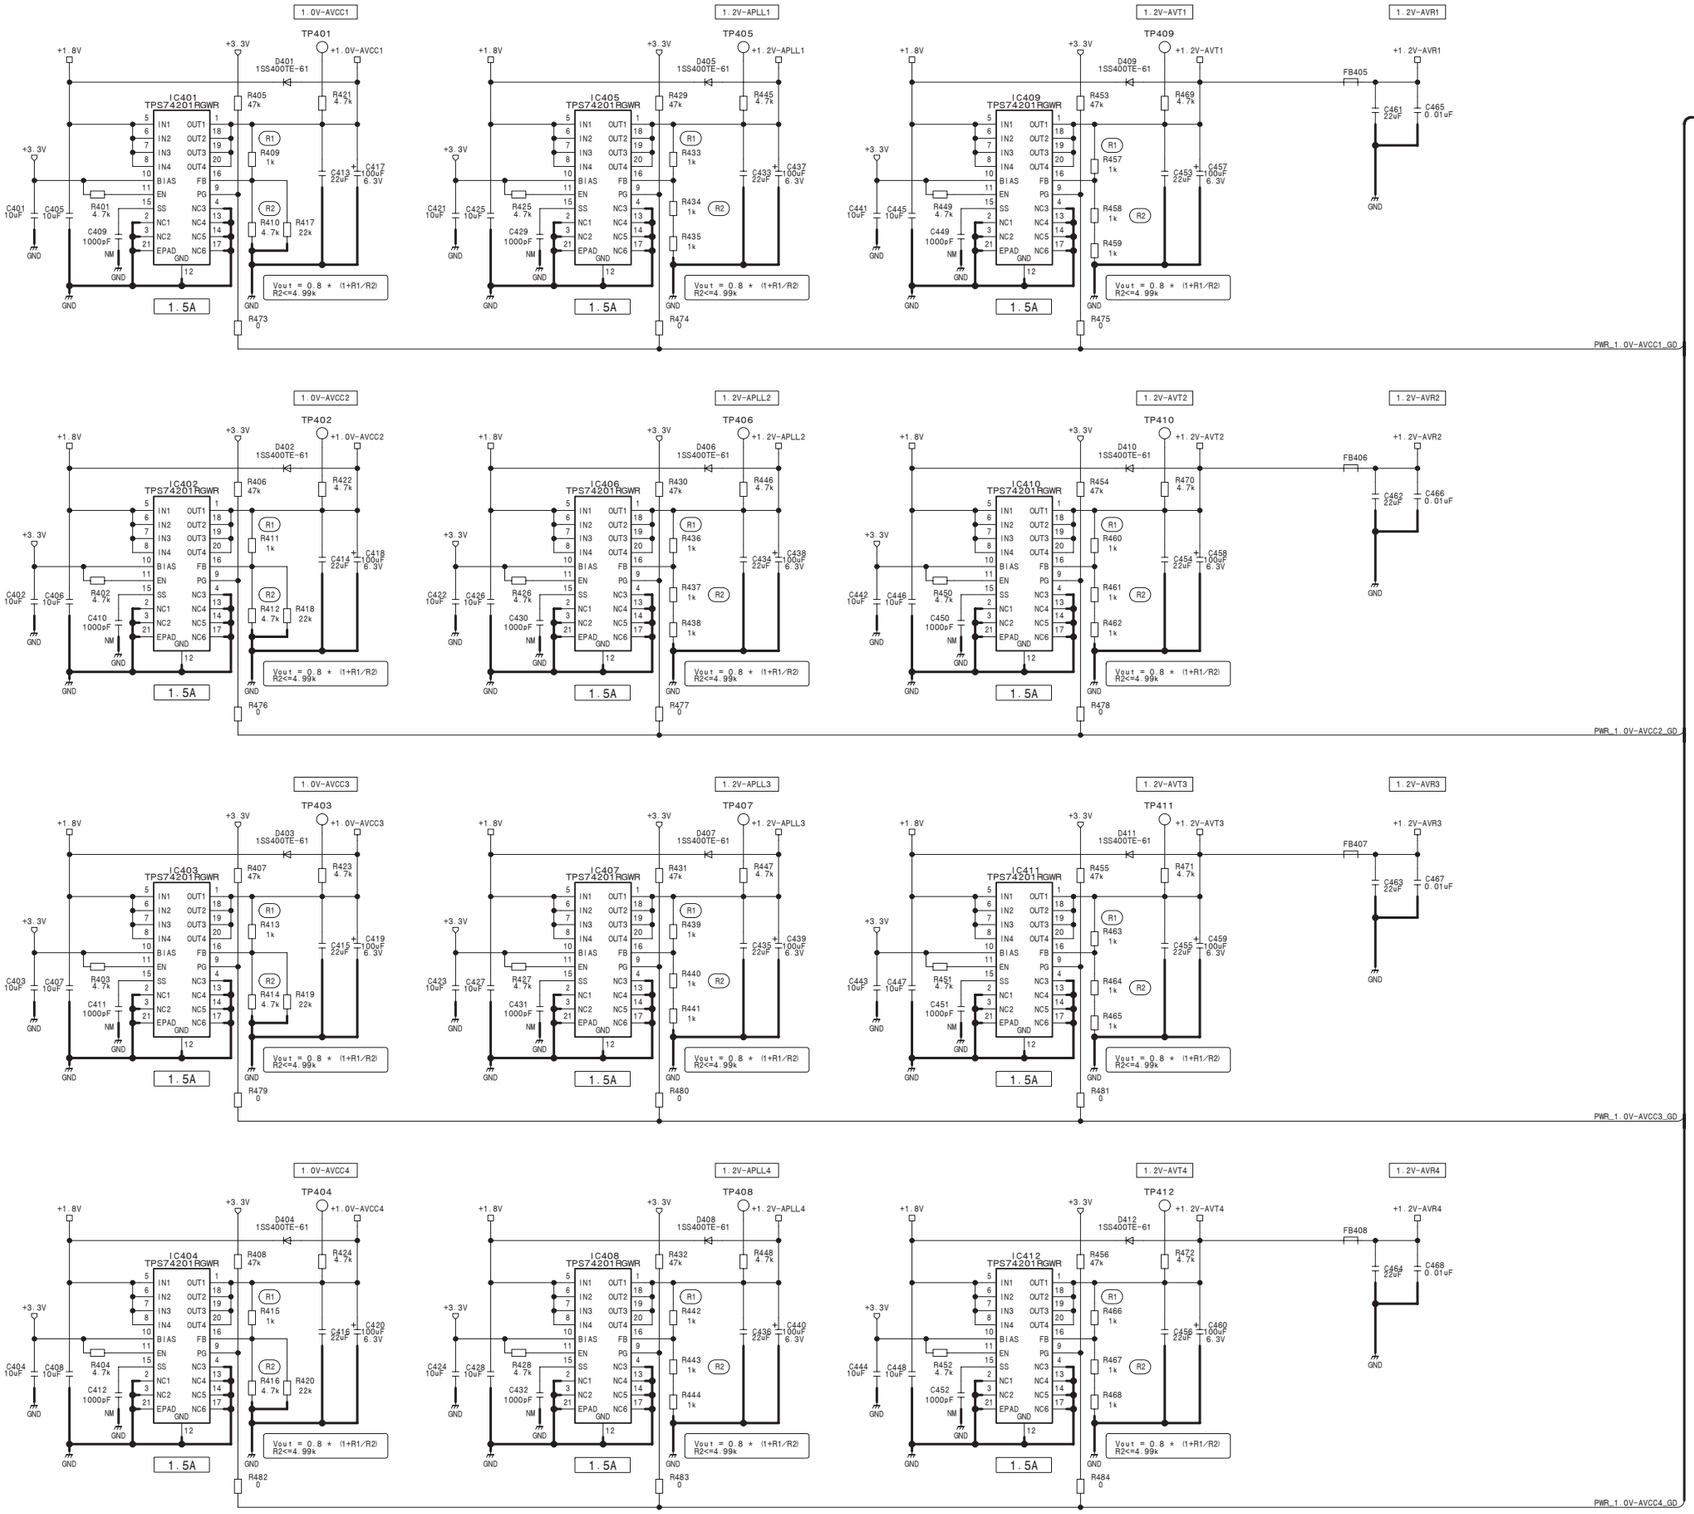

POWER SUPPLY (3/3)

FC-112 (4/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_4

FC-112 (5/40)
SUFFIX: -12

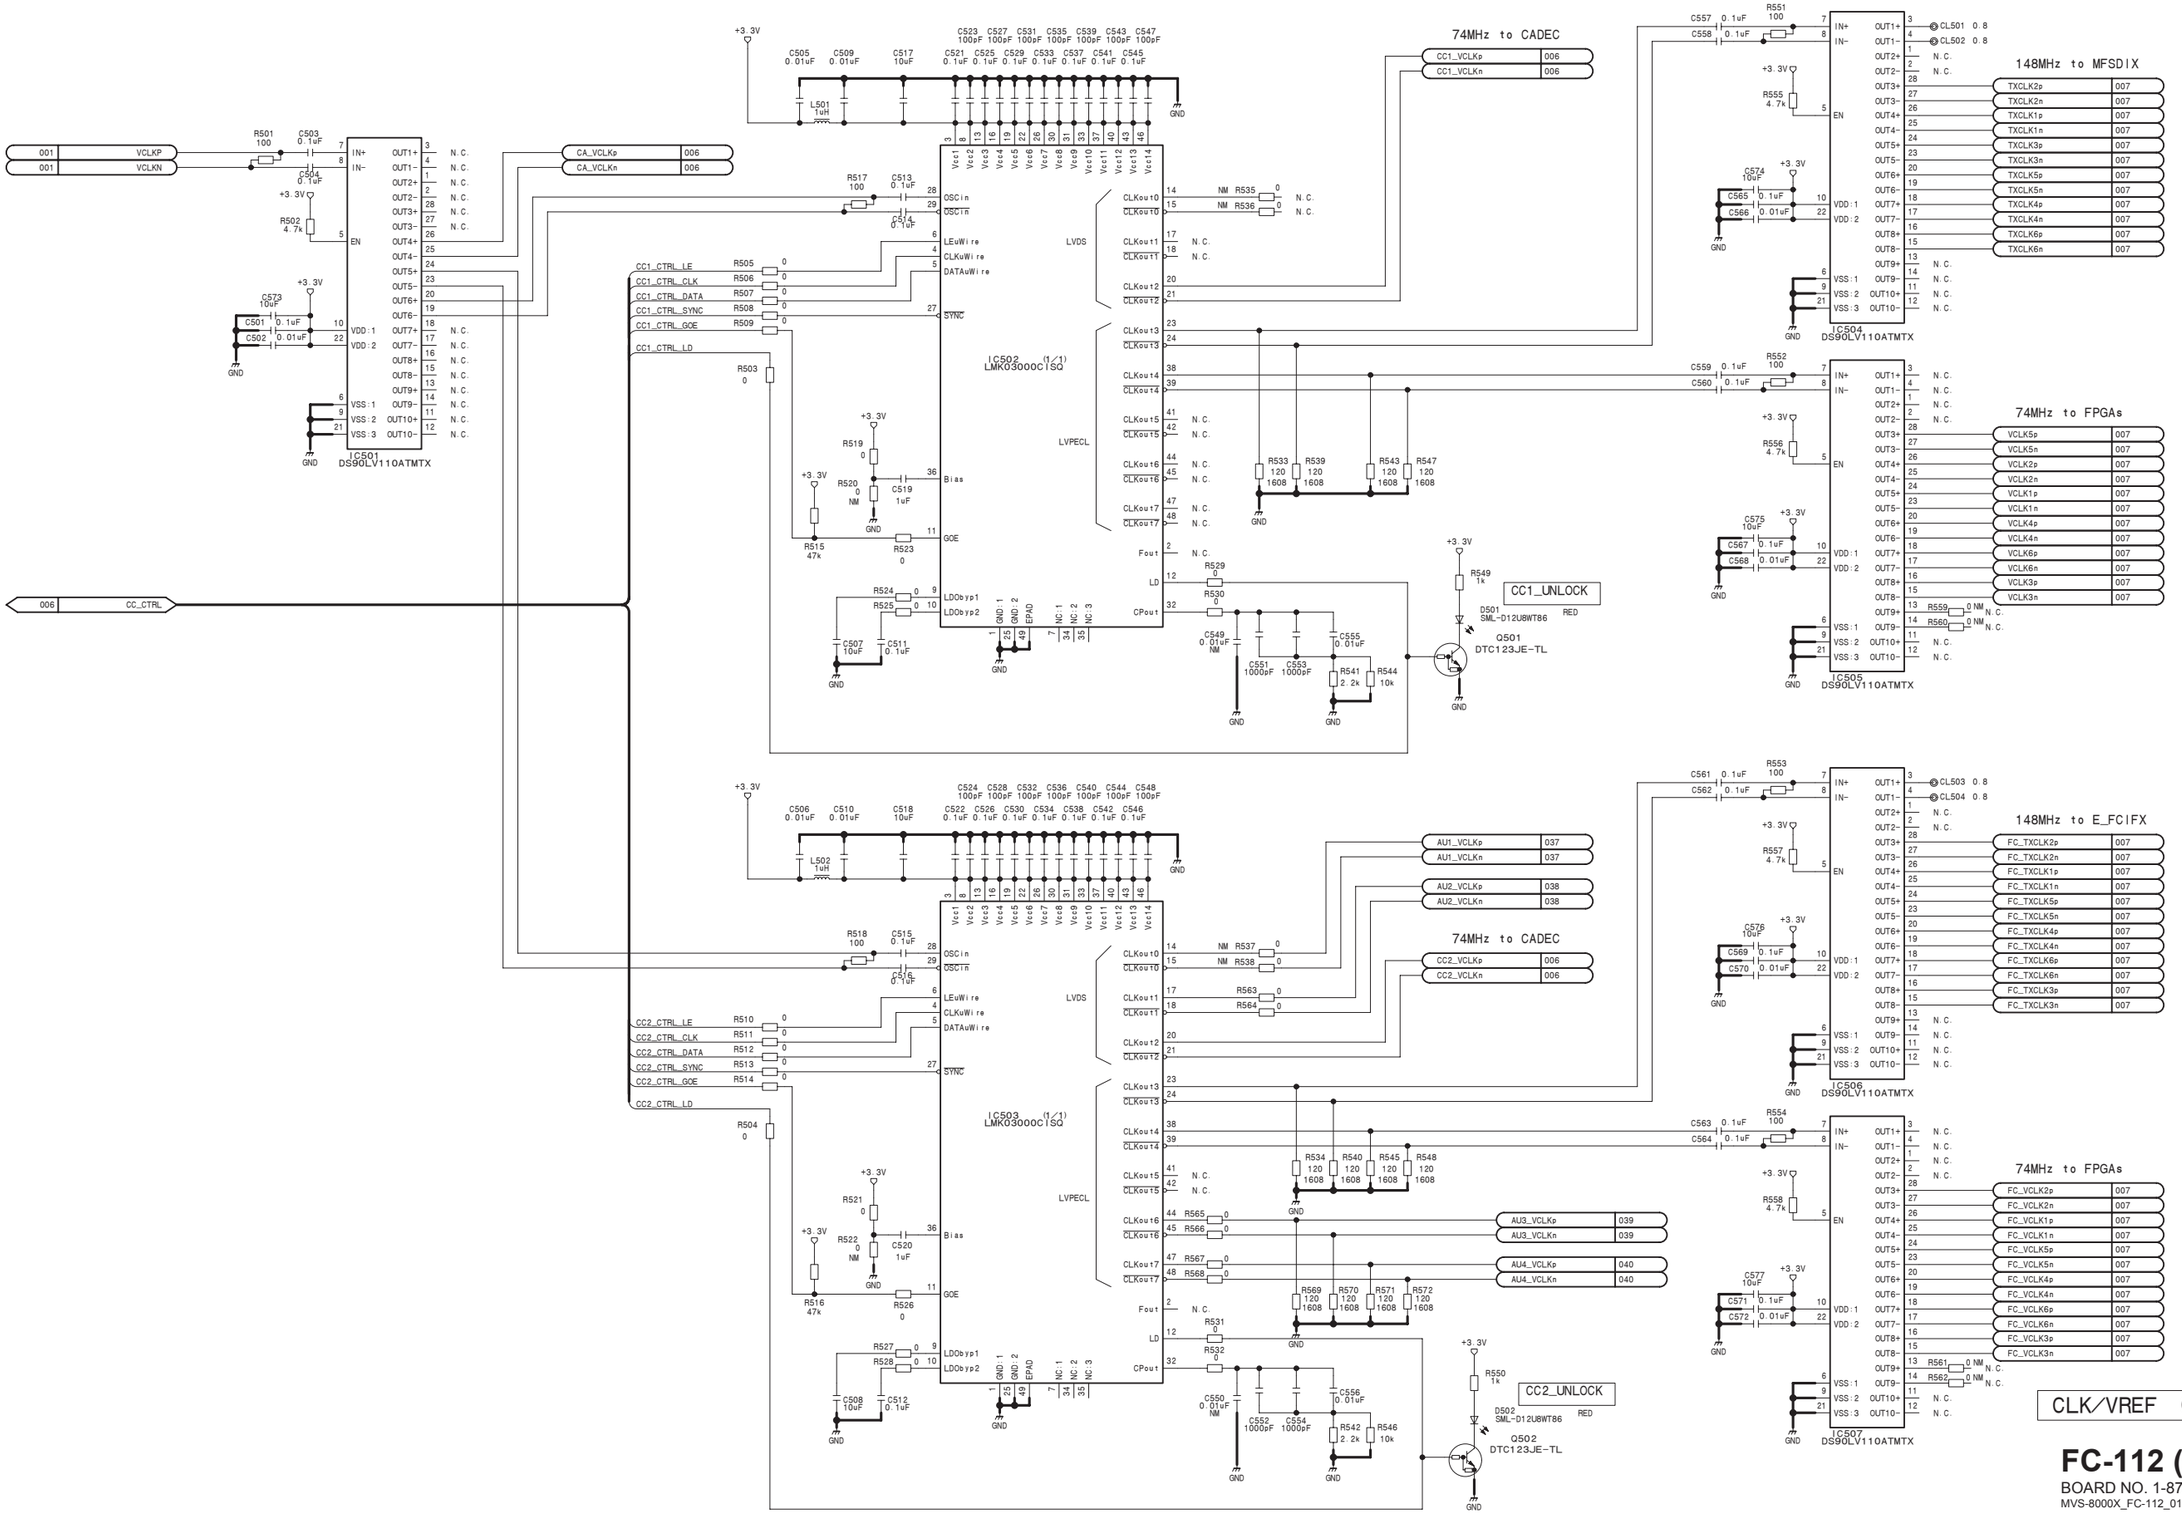

FC-112 (5/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_5

FC-112 (6/40)
SUFFIX: -12

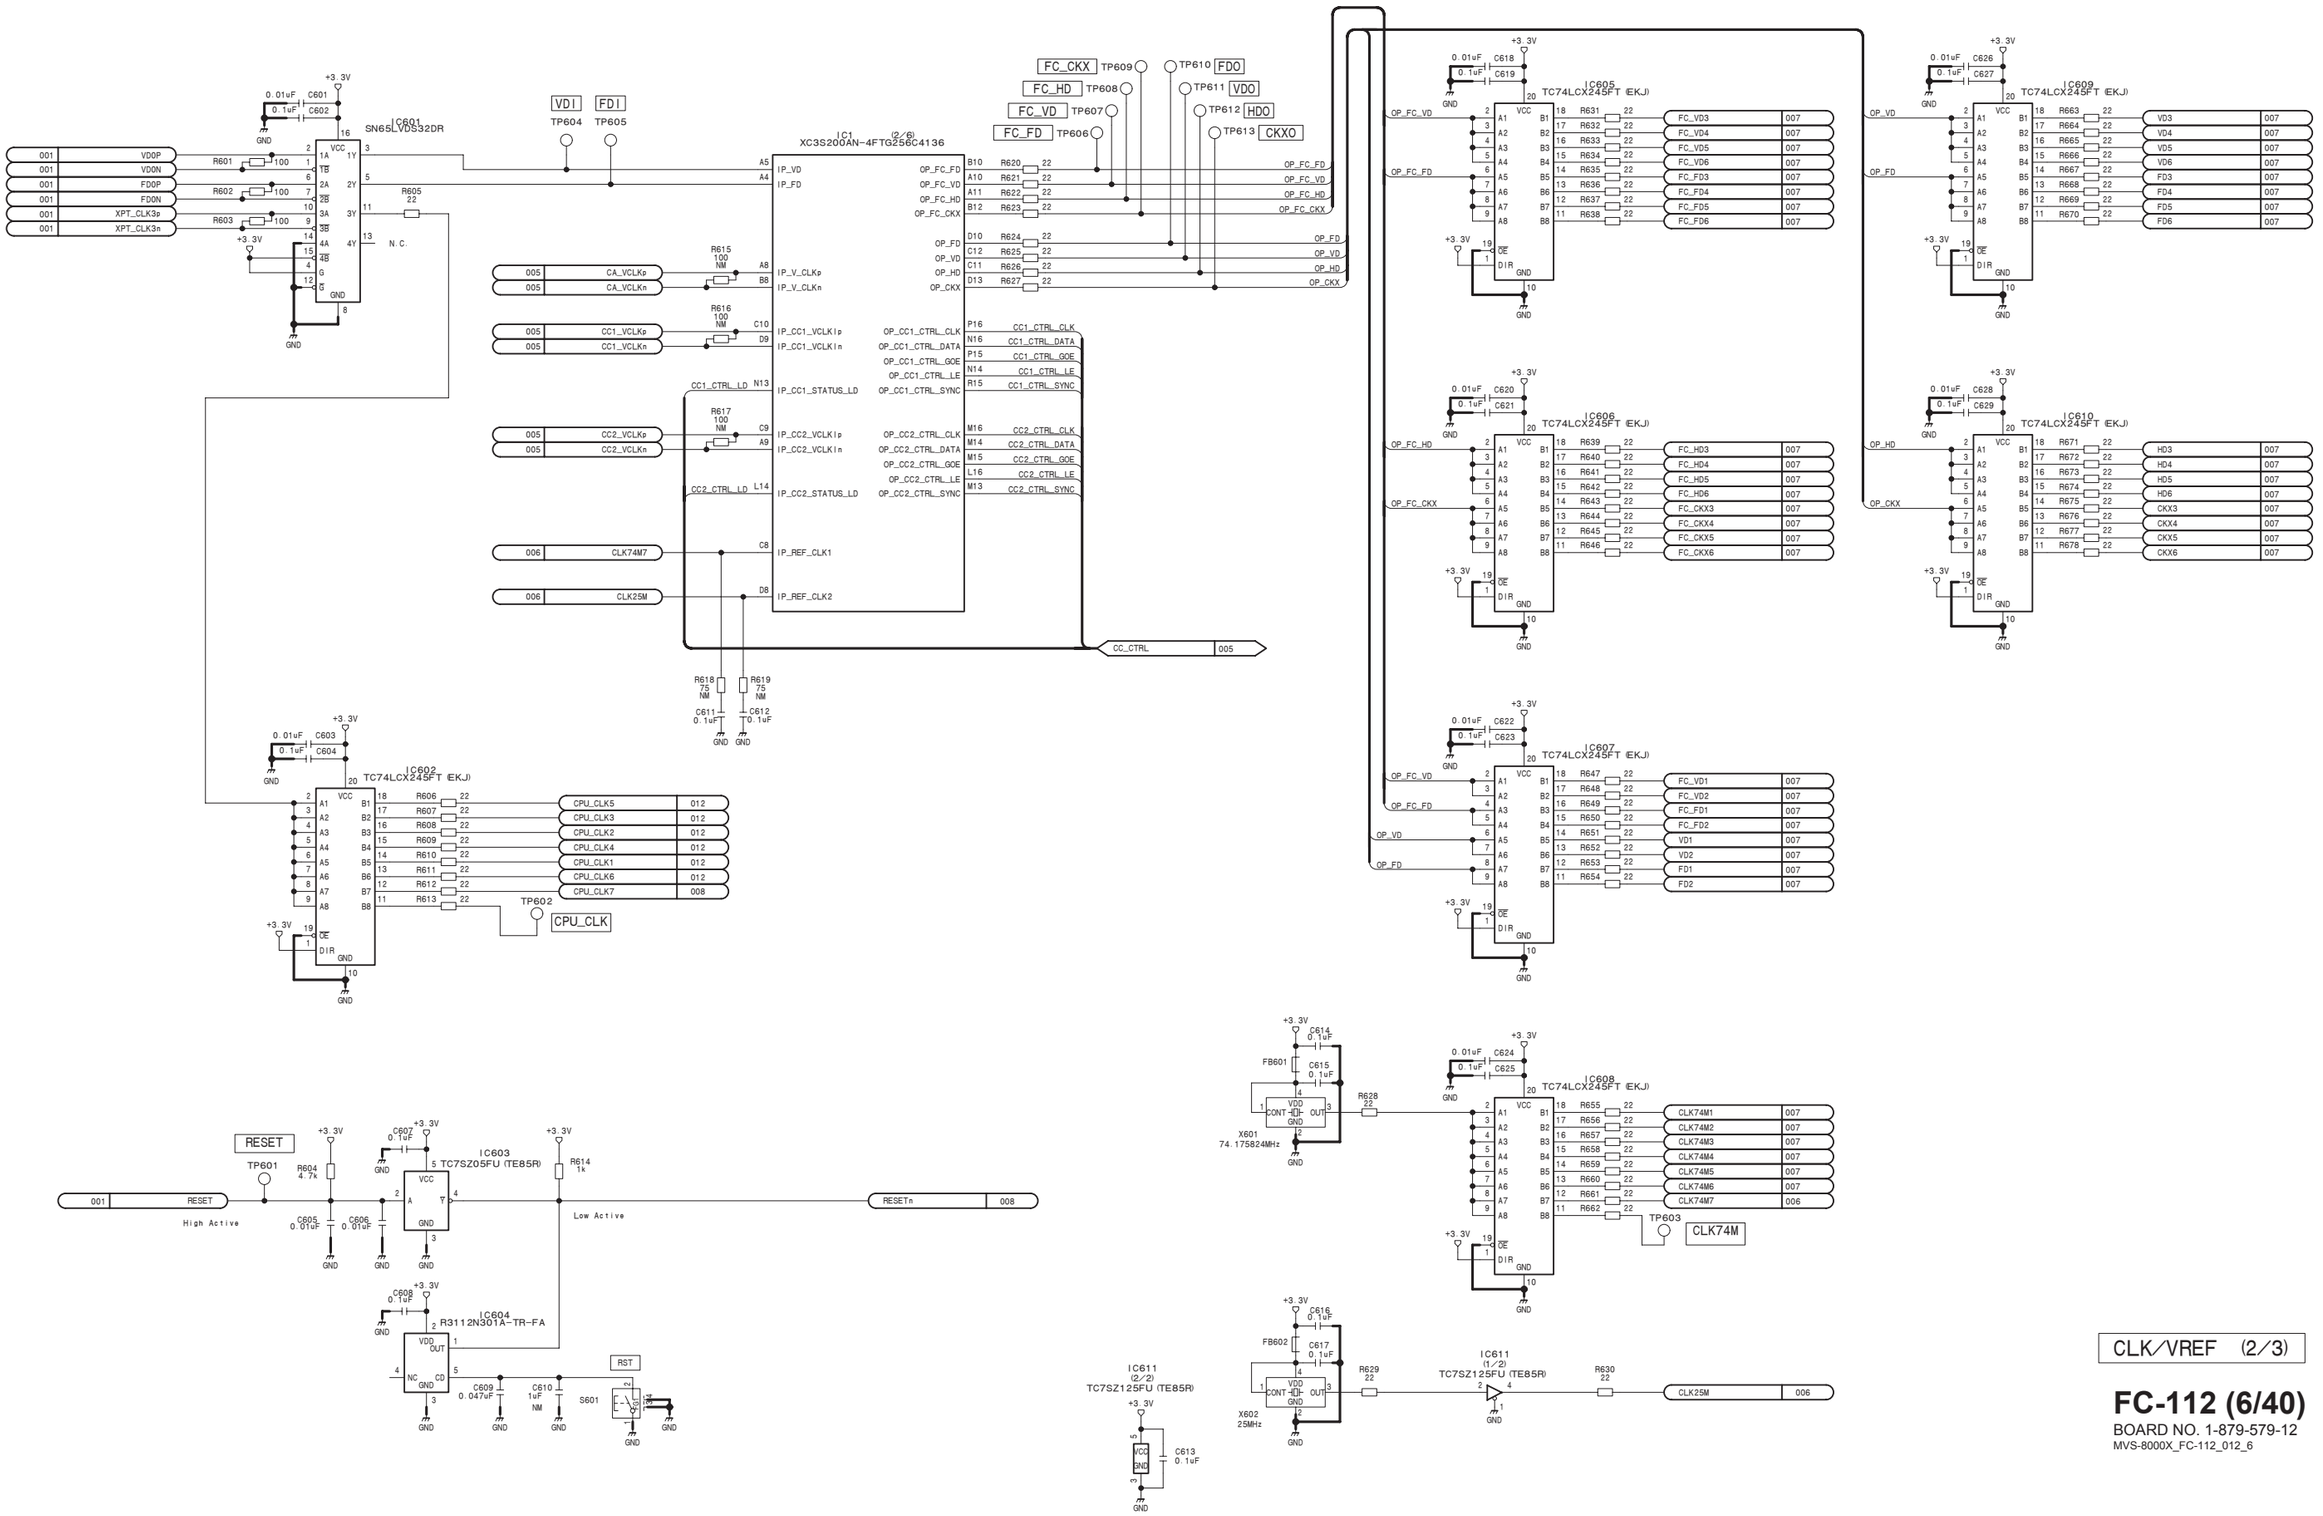

CLK/VREF (2/3)

FC-112 (6/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_6

FC-112 (7/40)
SUFFIX: -12

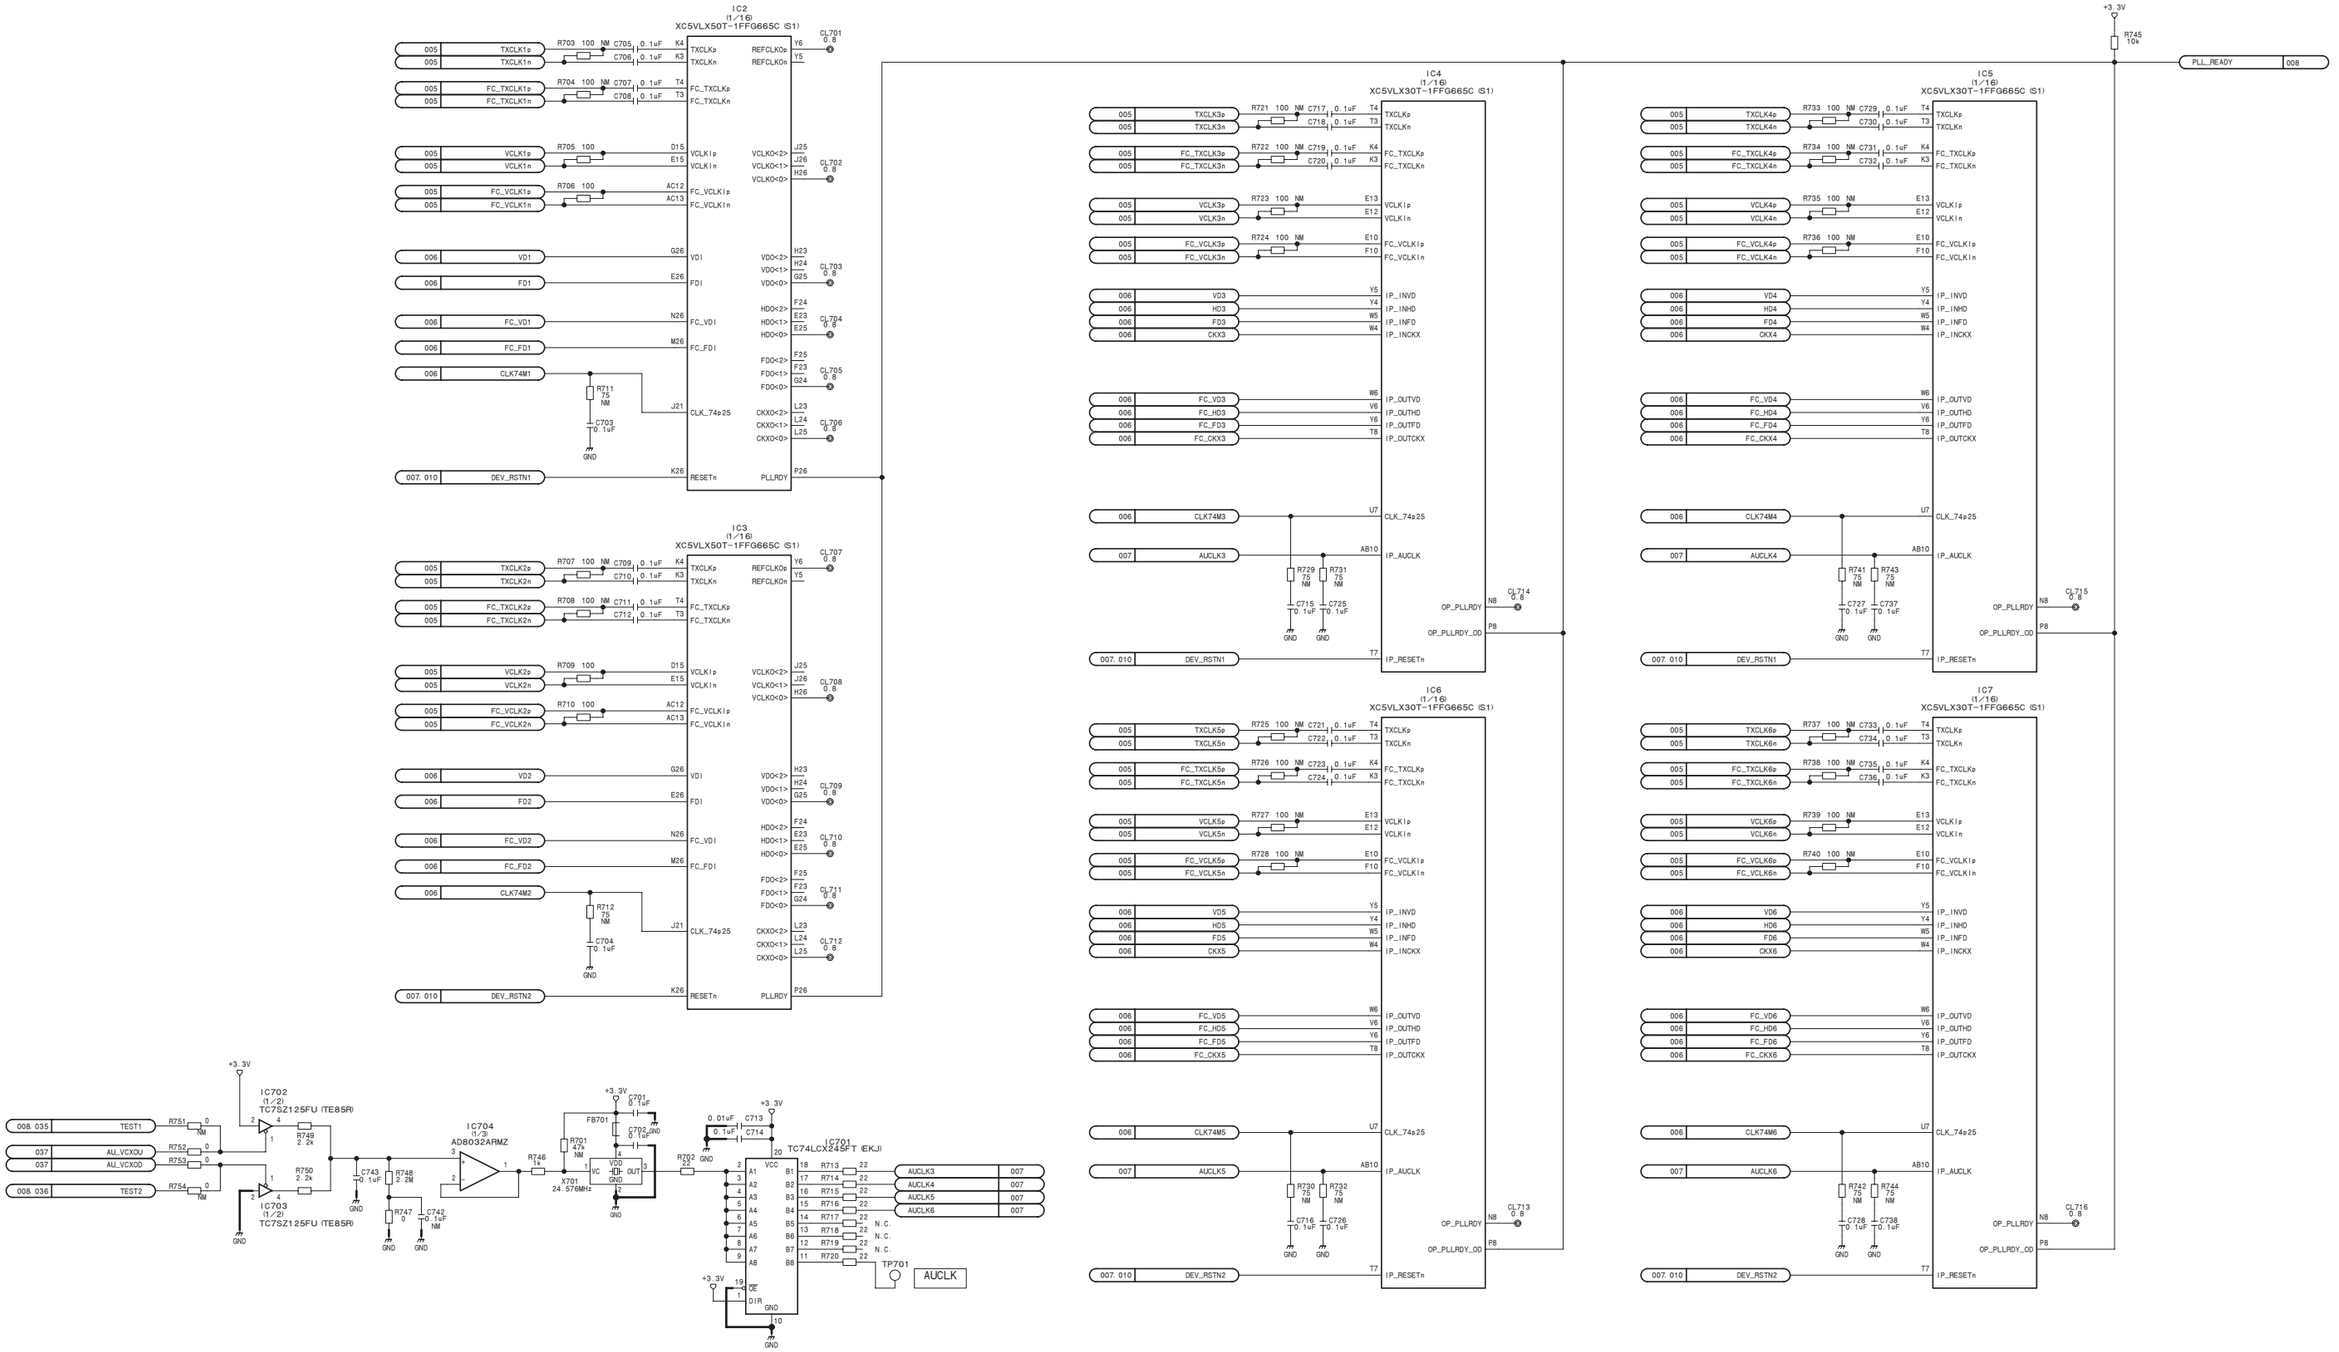

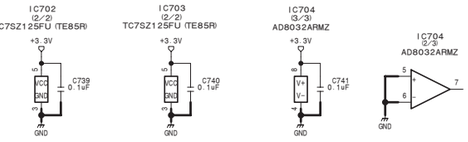

CLK/VREF (3/3)

FC-112 (7/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_7

FC-112 (8/40)
SUFFIX: -12

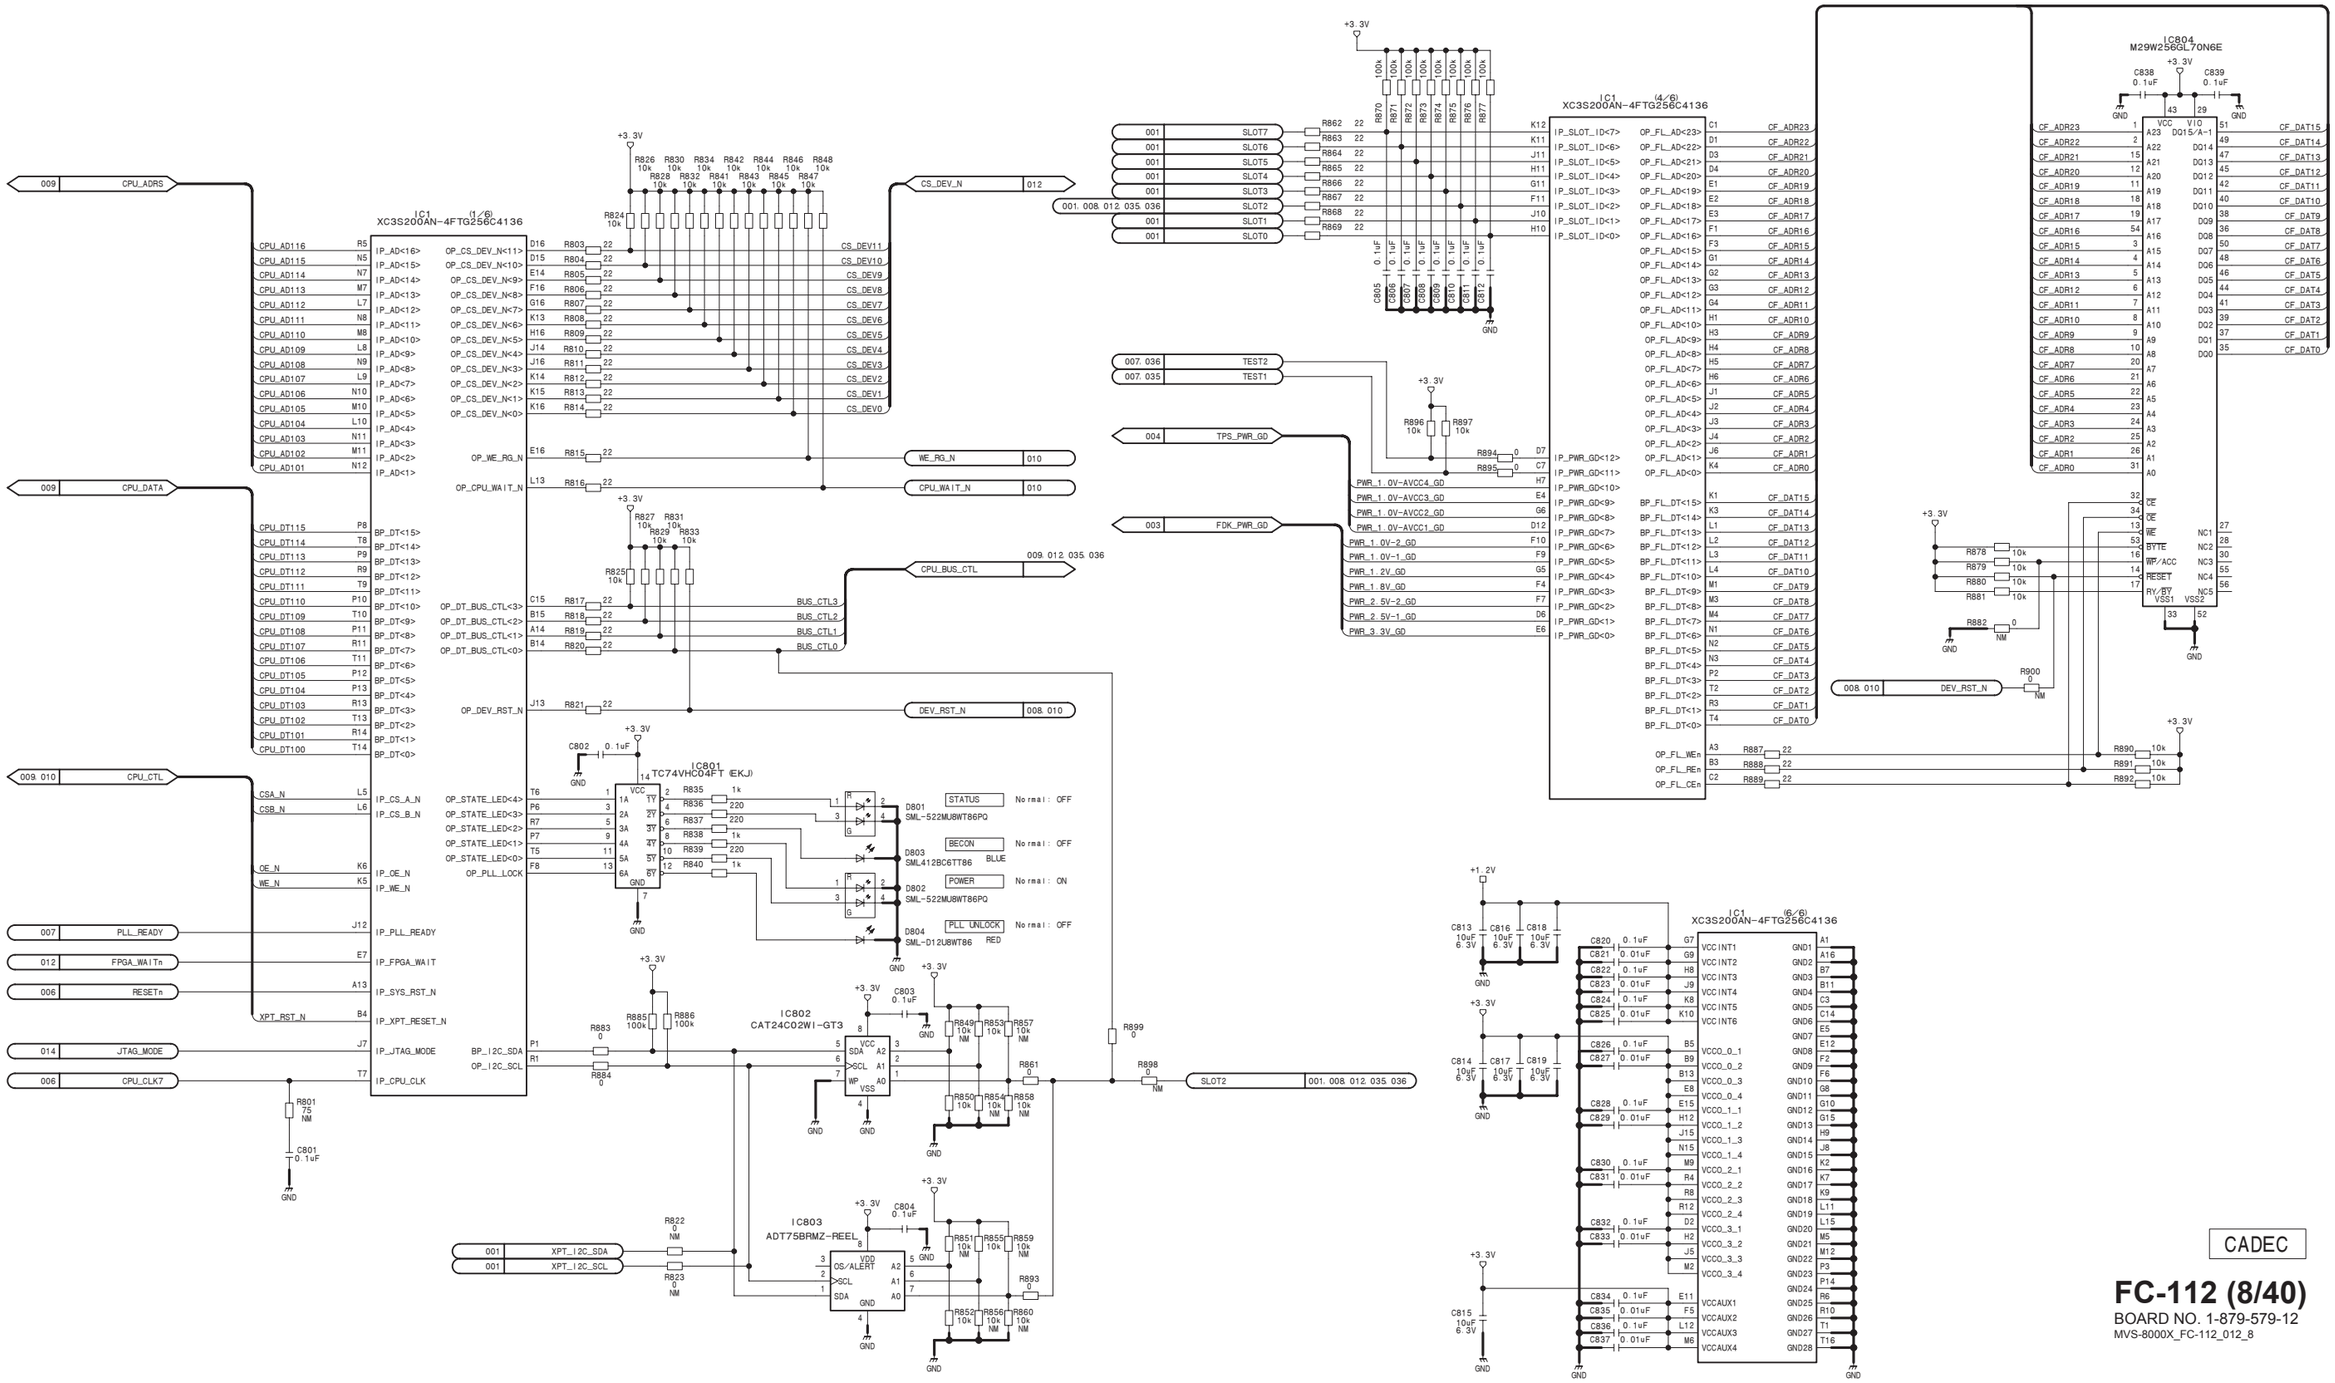

CADEC

FC-112 (8/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_8

FC-112 (9/40)
SUFFIX: -12

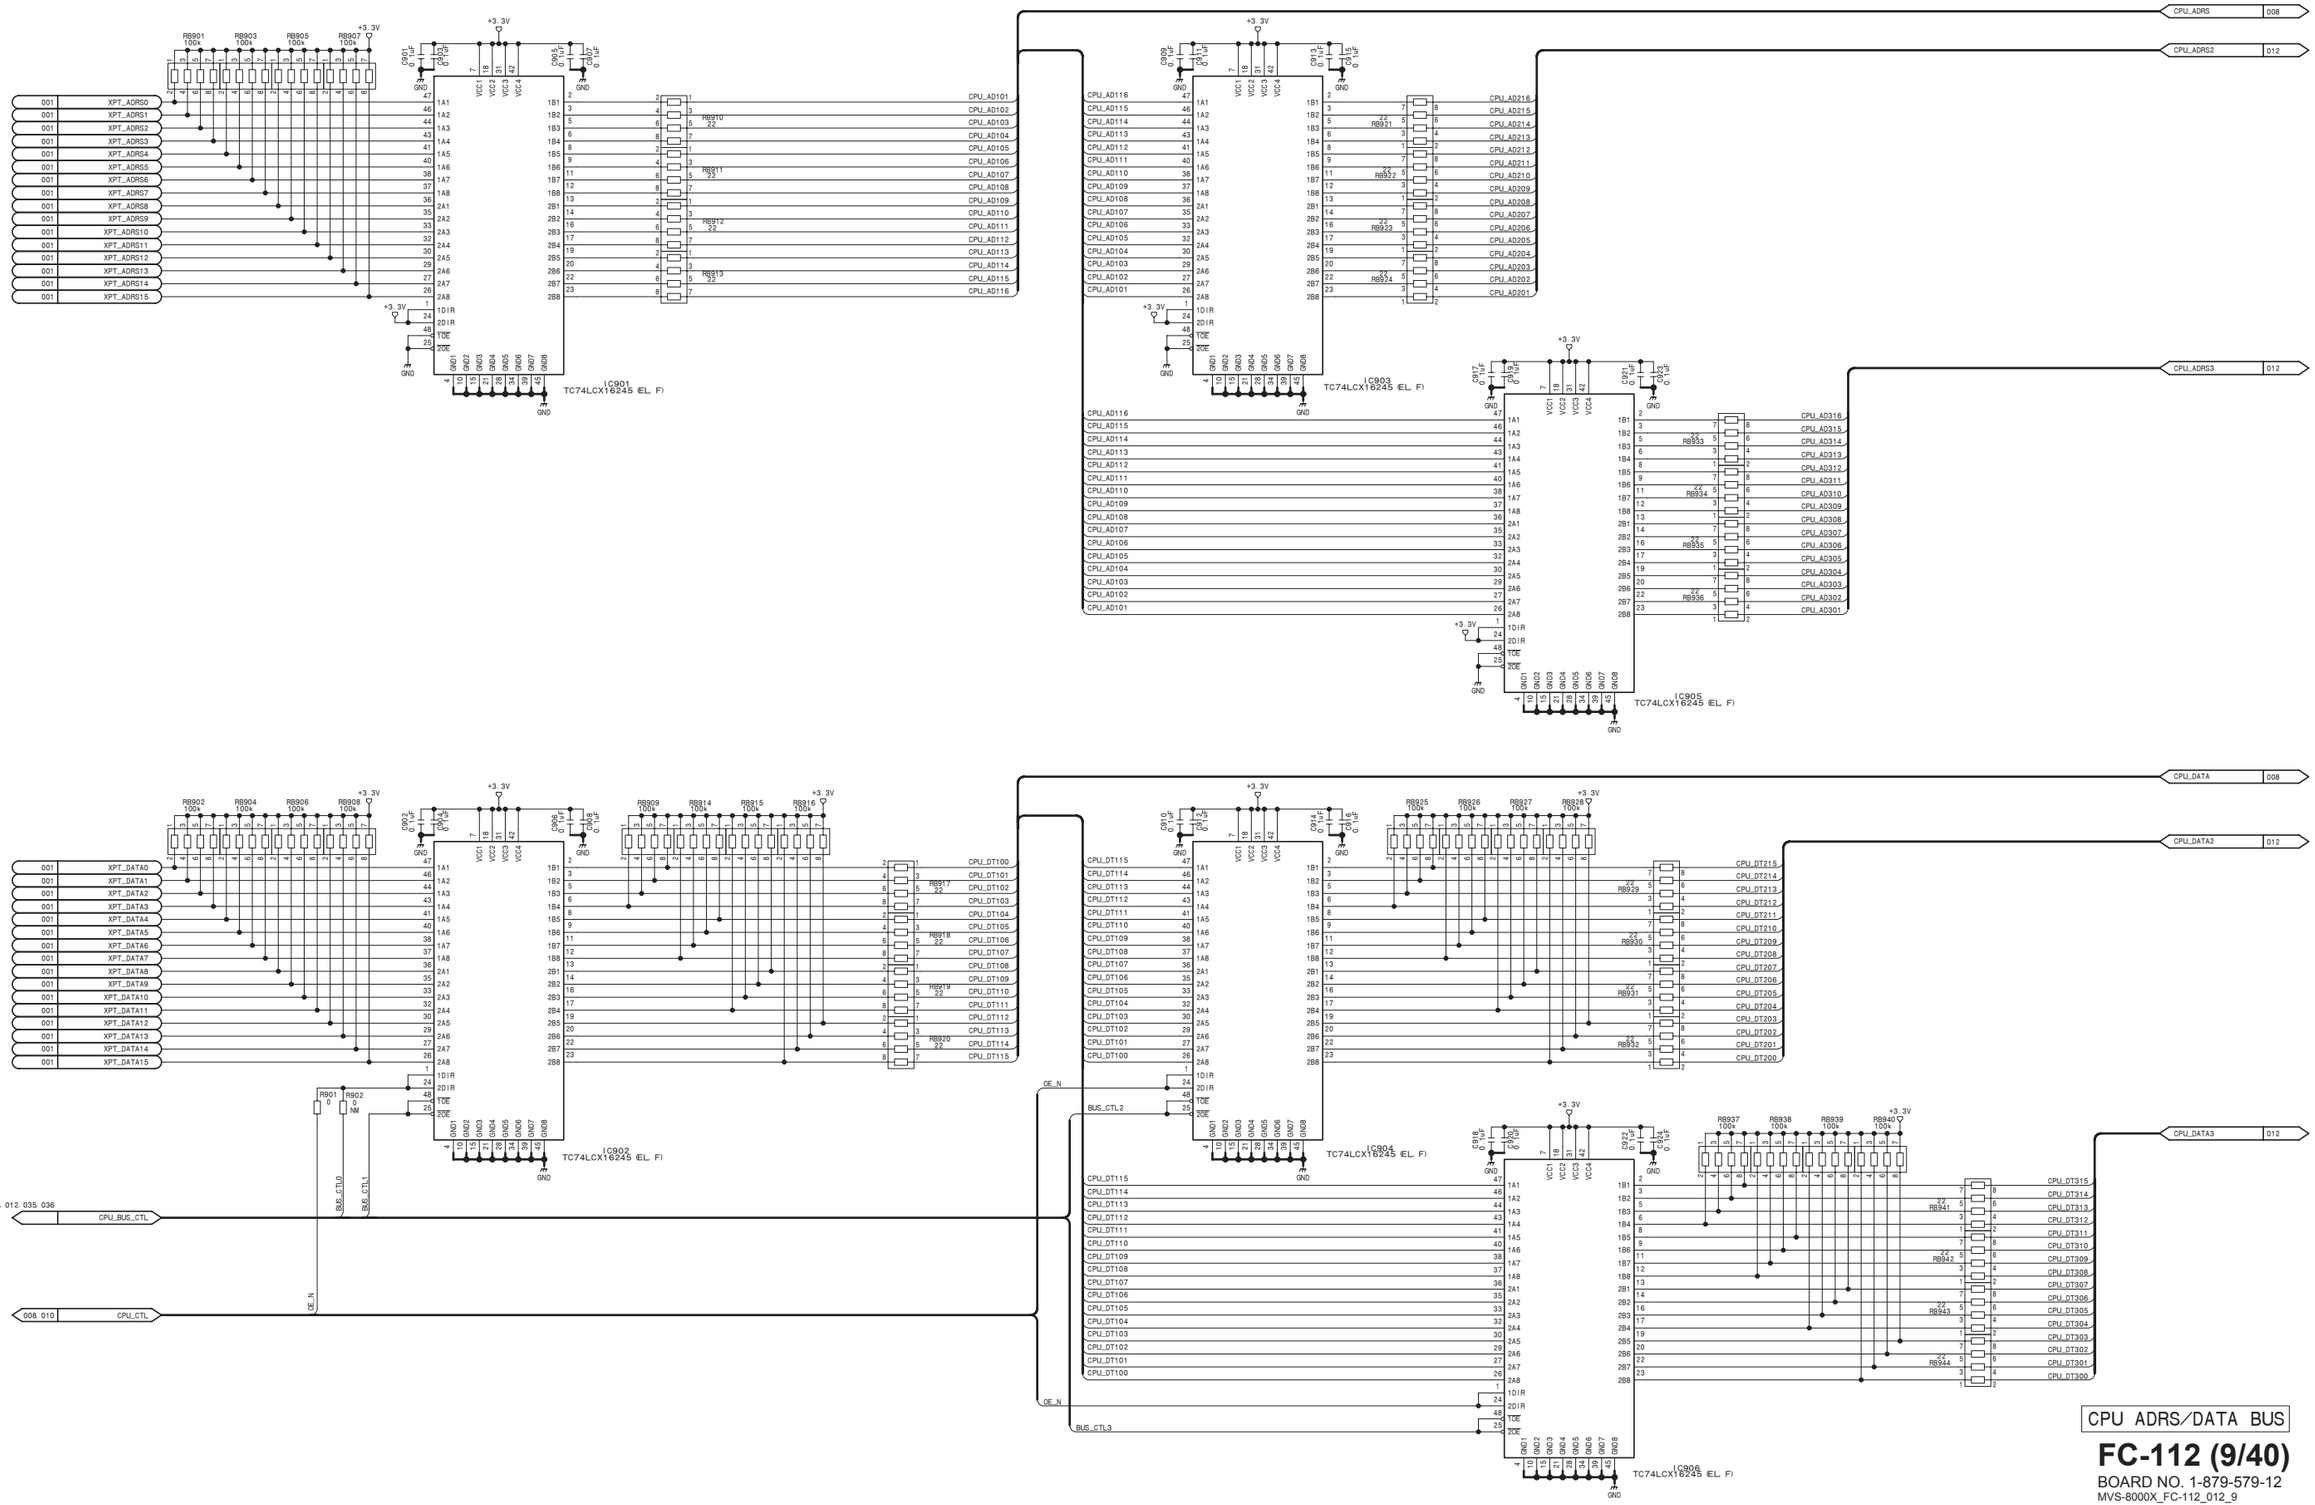

FC-112 (10/40)
SUFFIX: -12

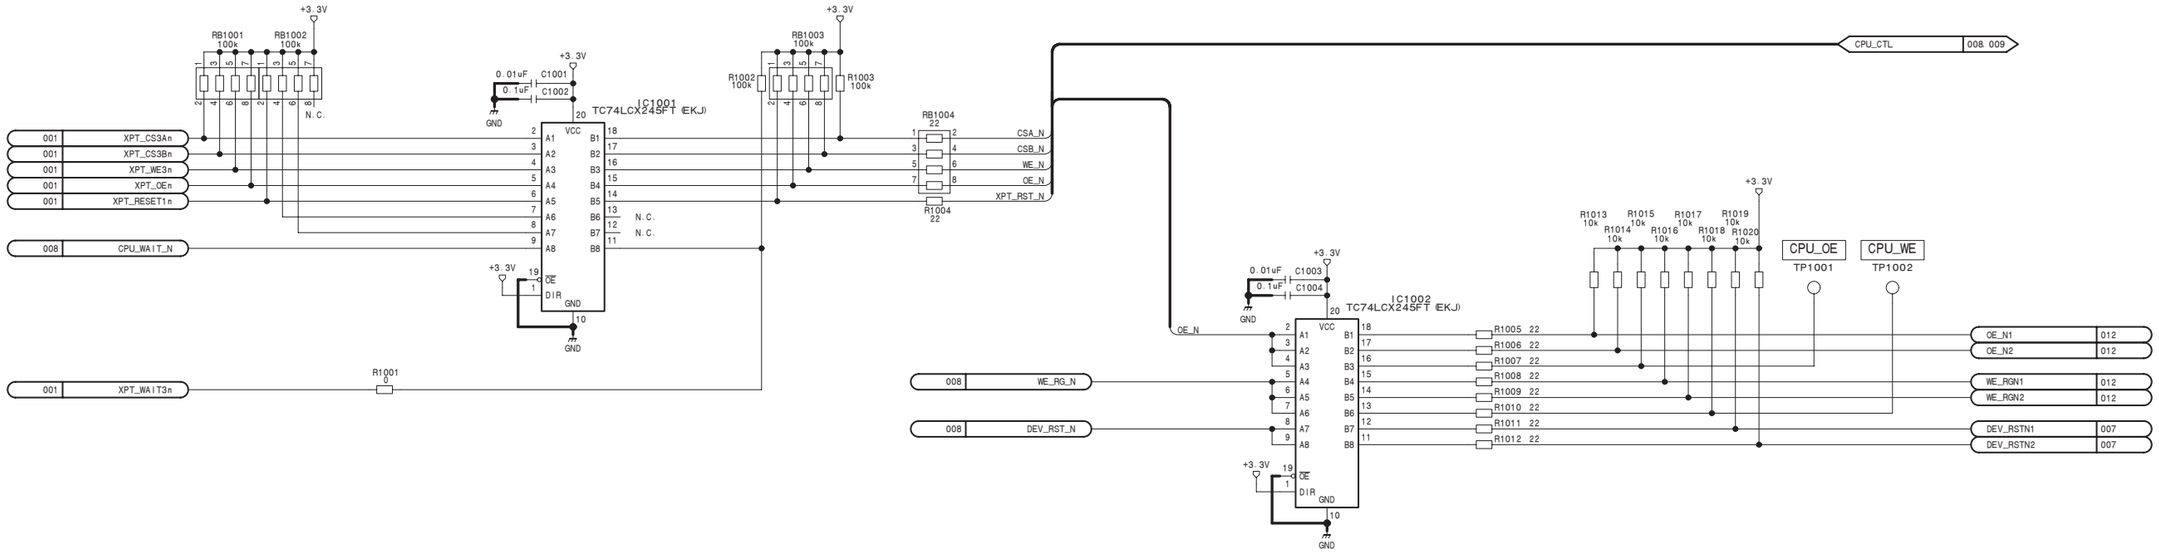

CPU CTRL BUS

FC-112 (10/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_10

FC-112 (11/40)
SUFFIX: -12

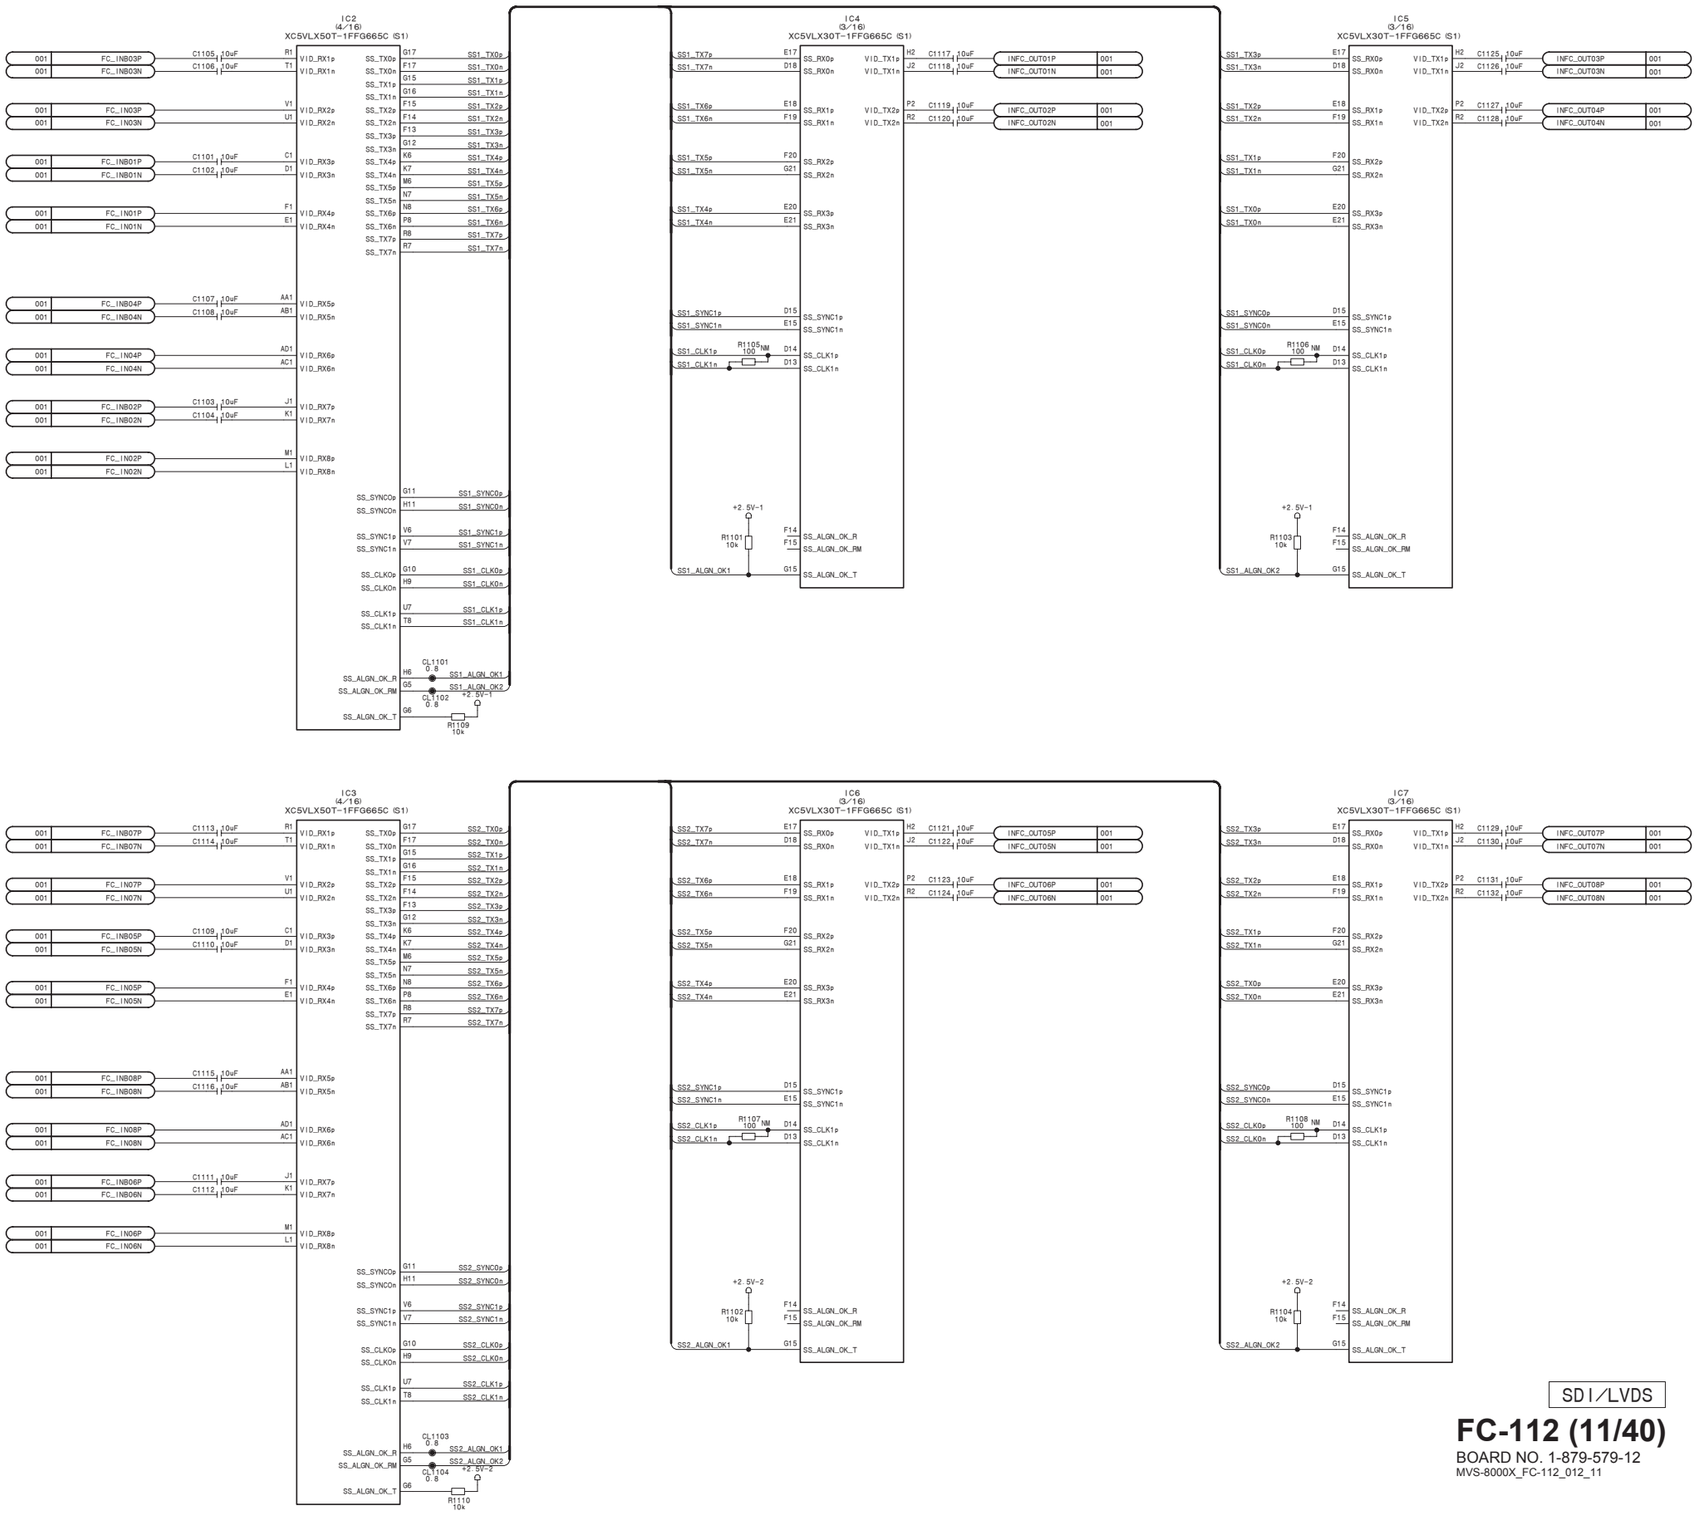

SDI/LVDS

FC-112 (11/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_11

FC-112 (12/40)
SUFFIX: -12

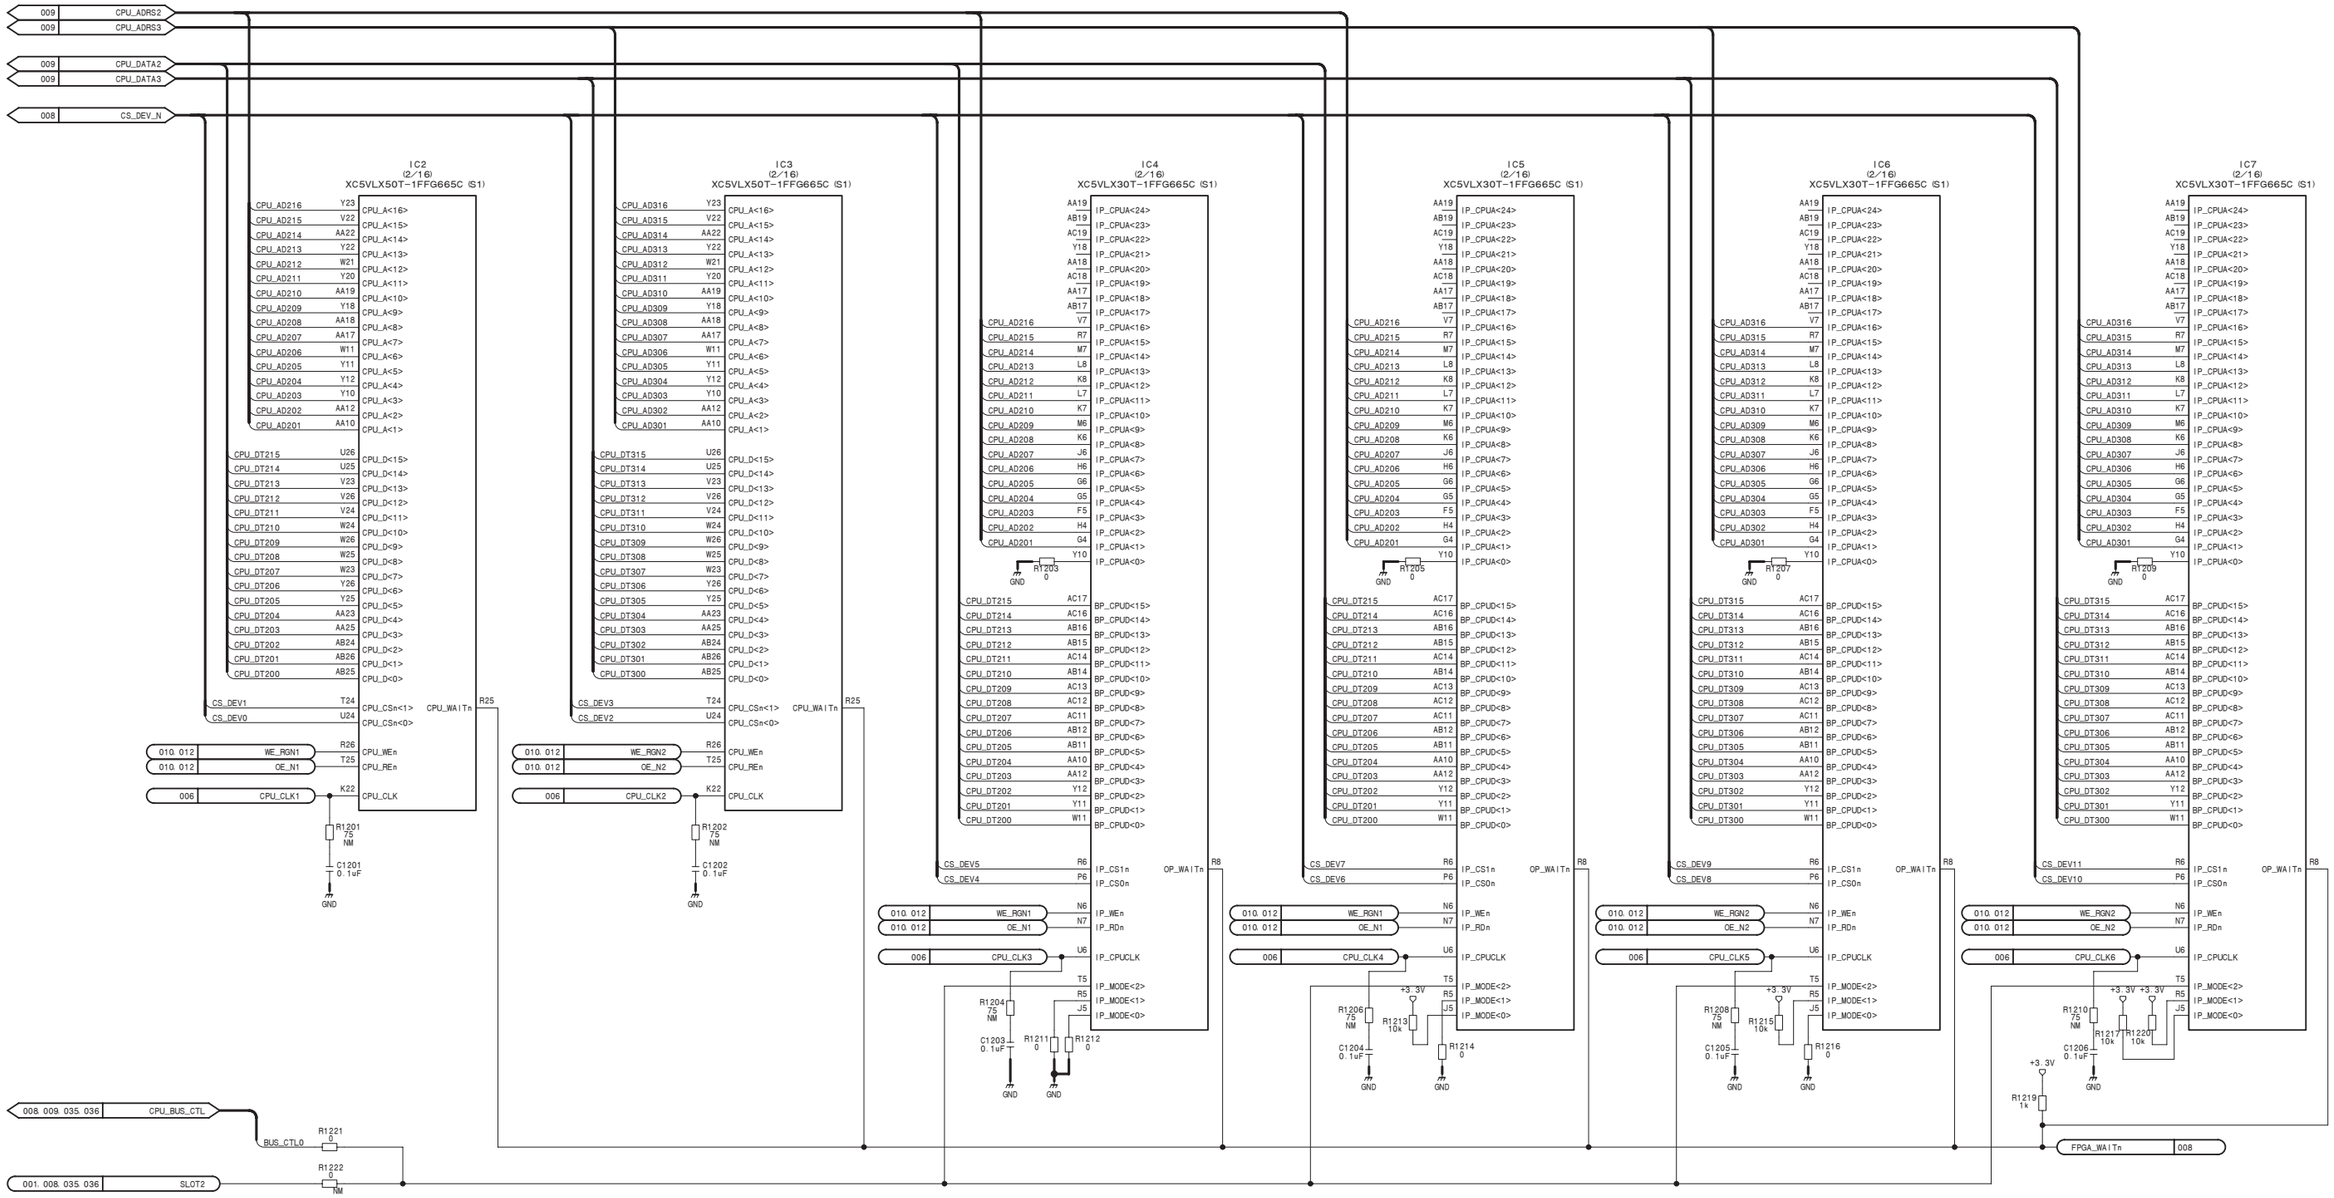

FPGA CPUIF

FC-112 (12/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_12

FC-112 (13/40)
SUFFIX: -12

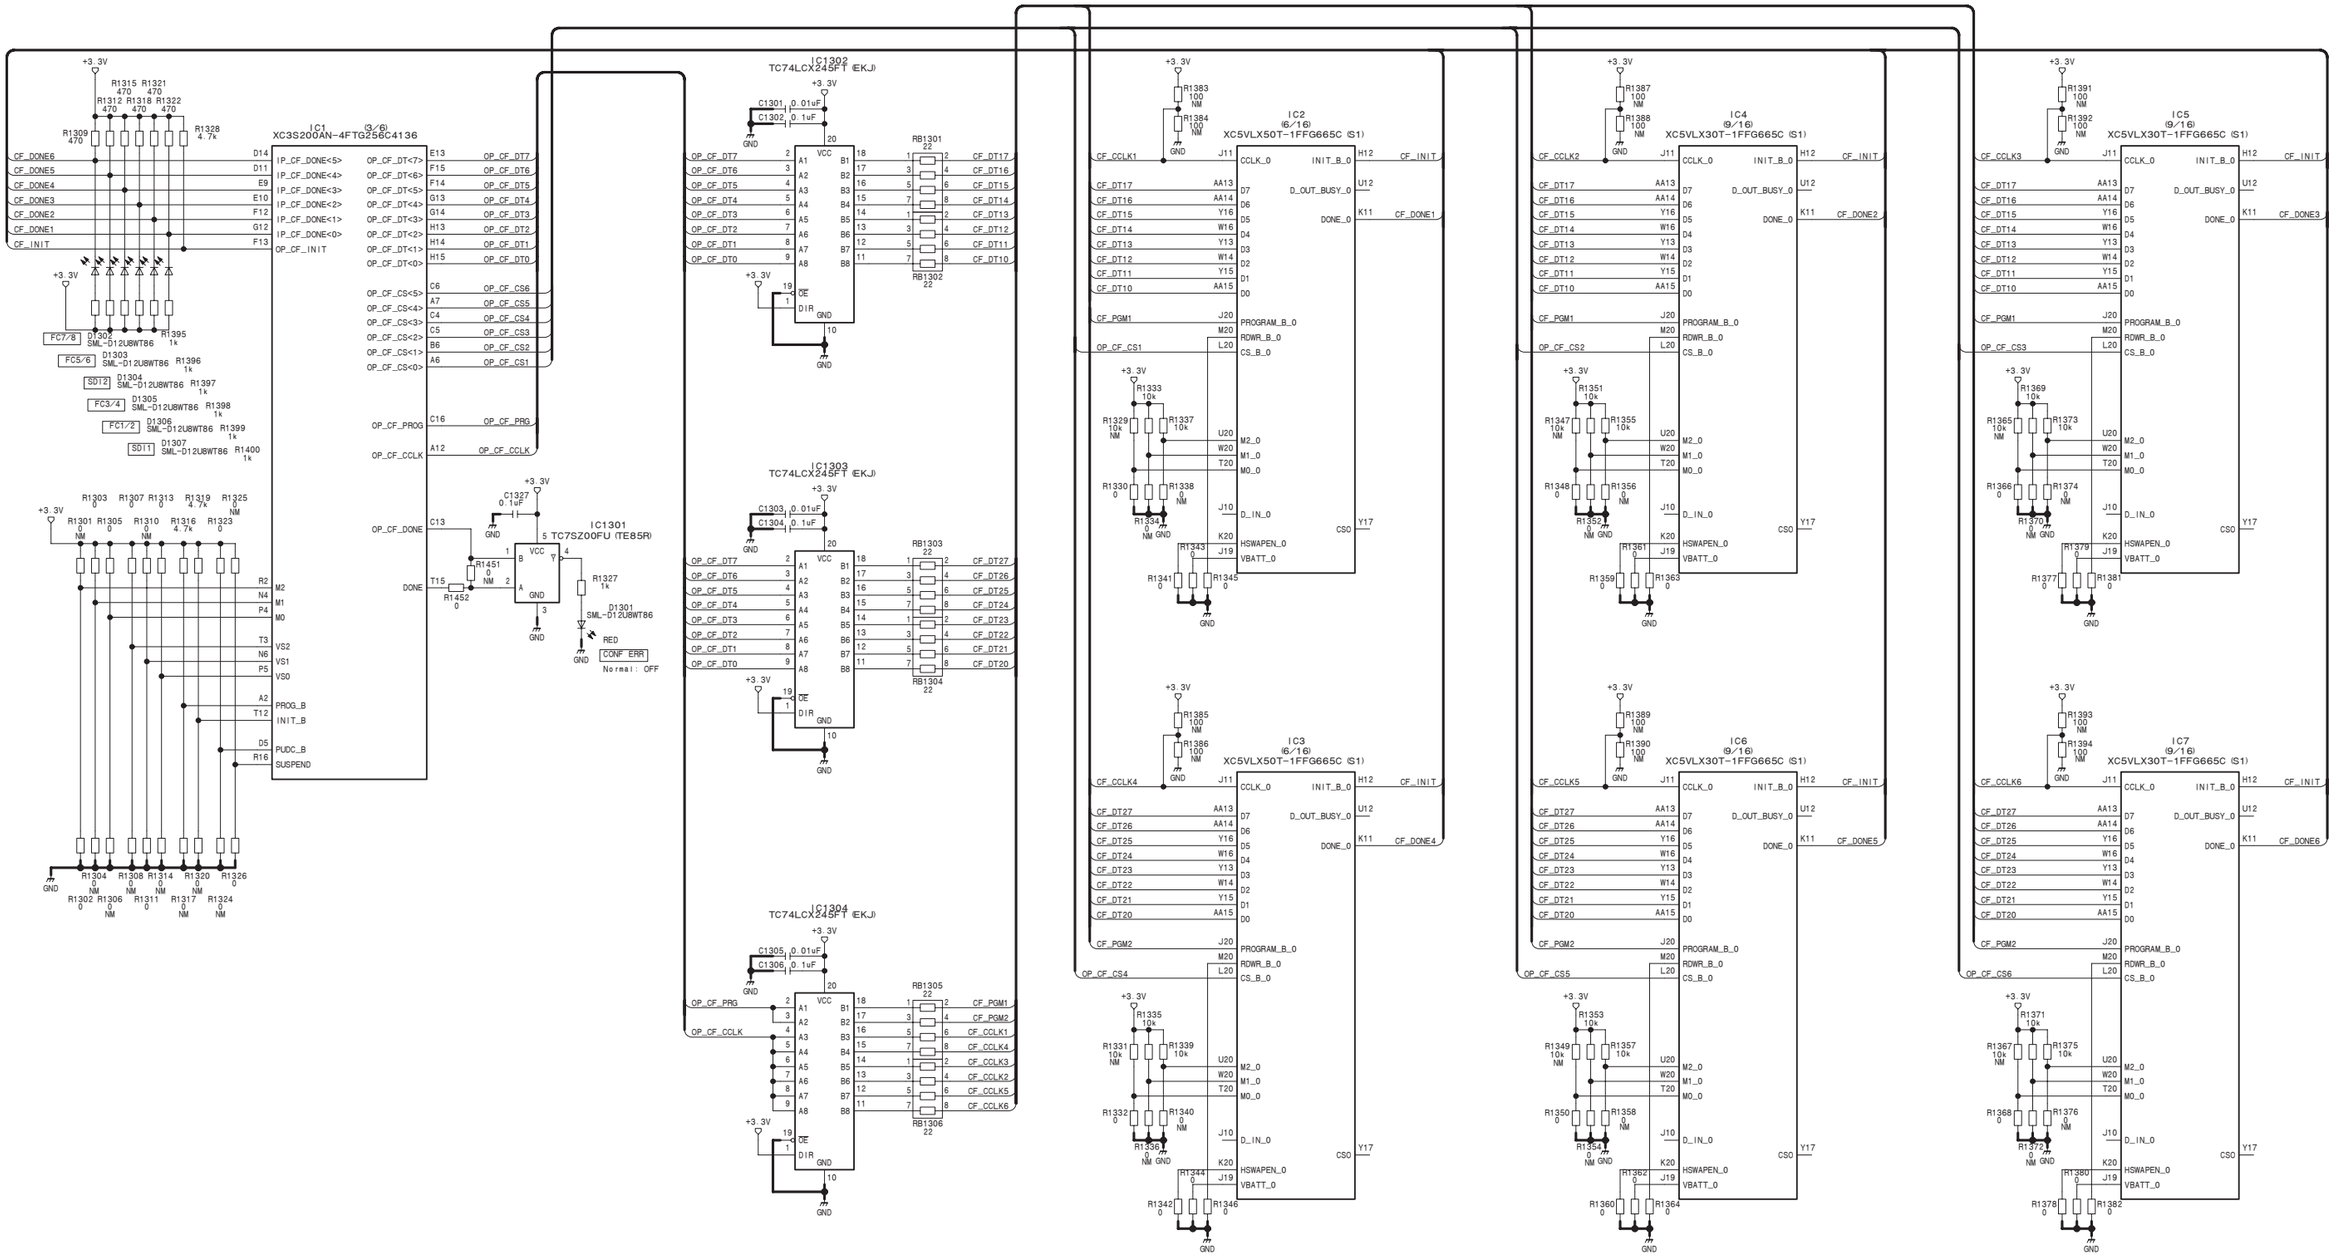

FC-112 (13/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_13

FC-112 (14/40)
SUFFIX: -12

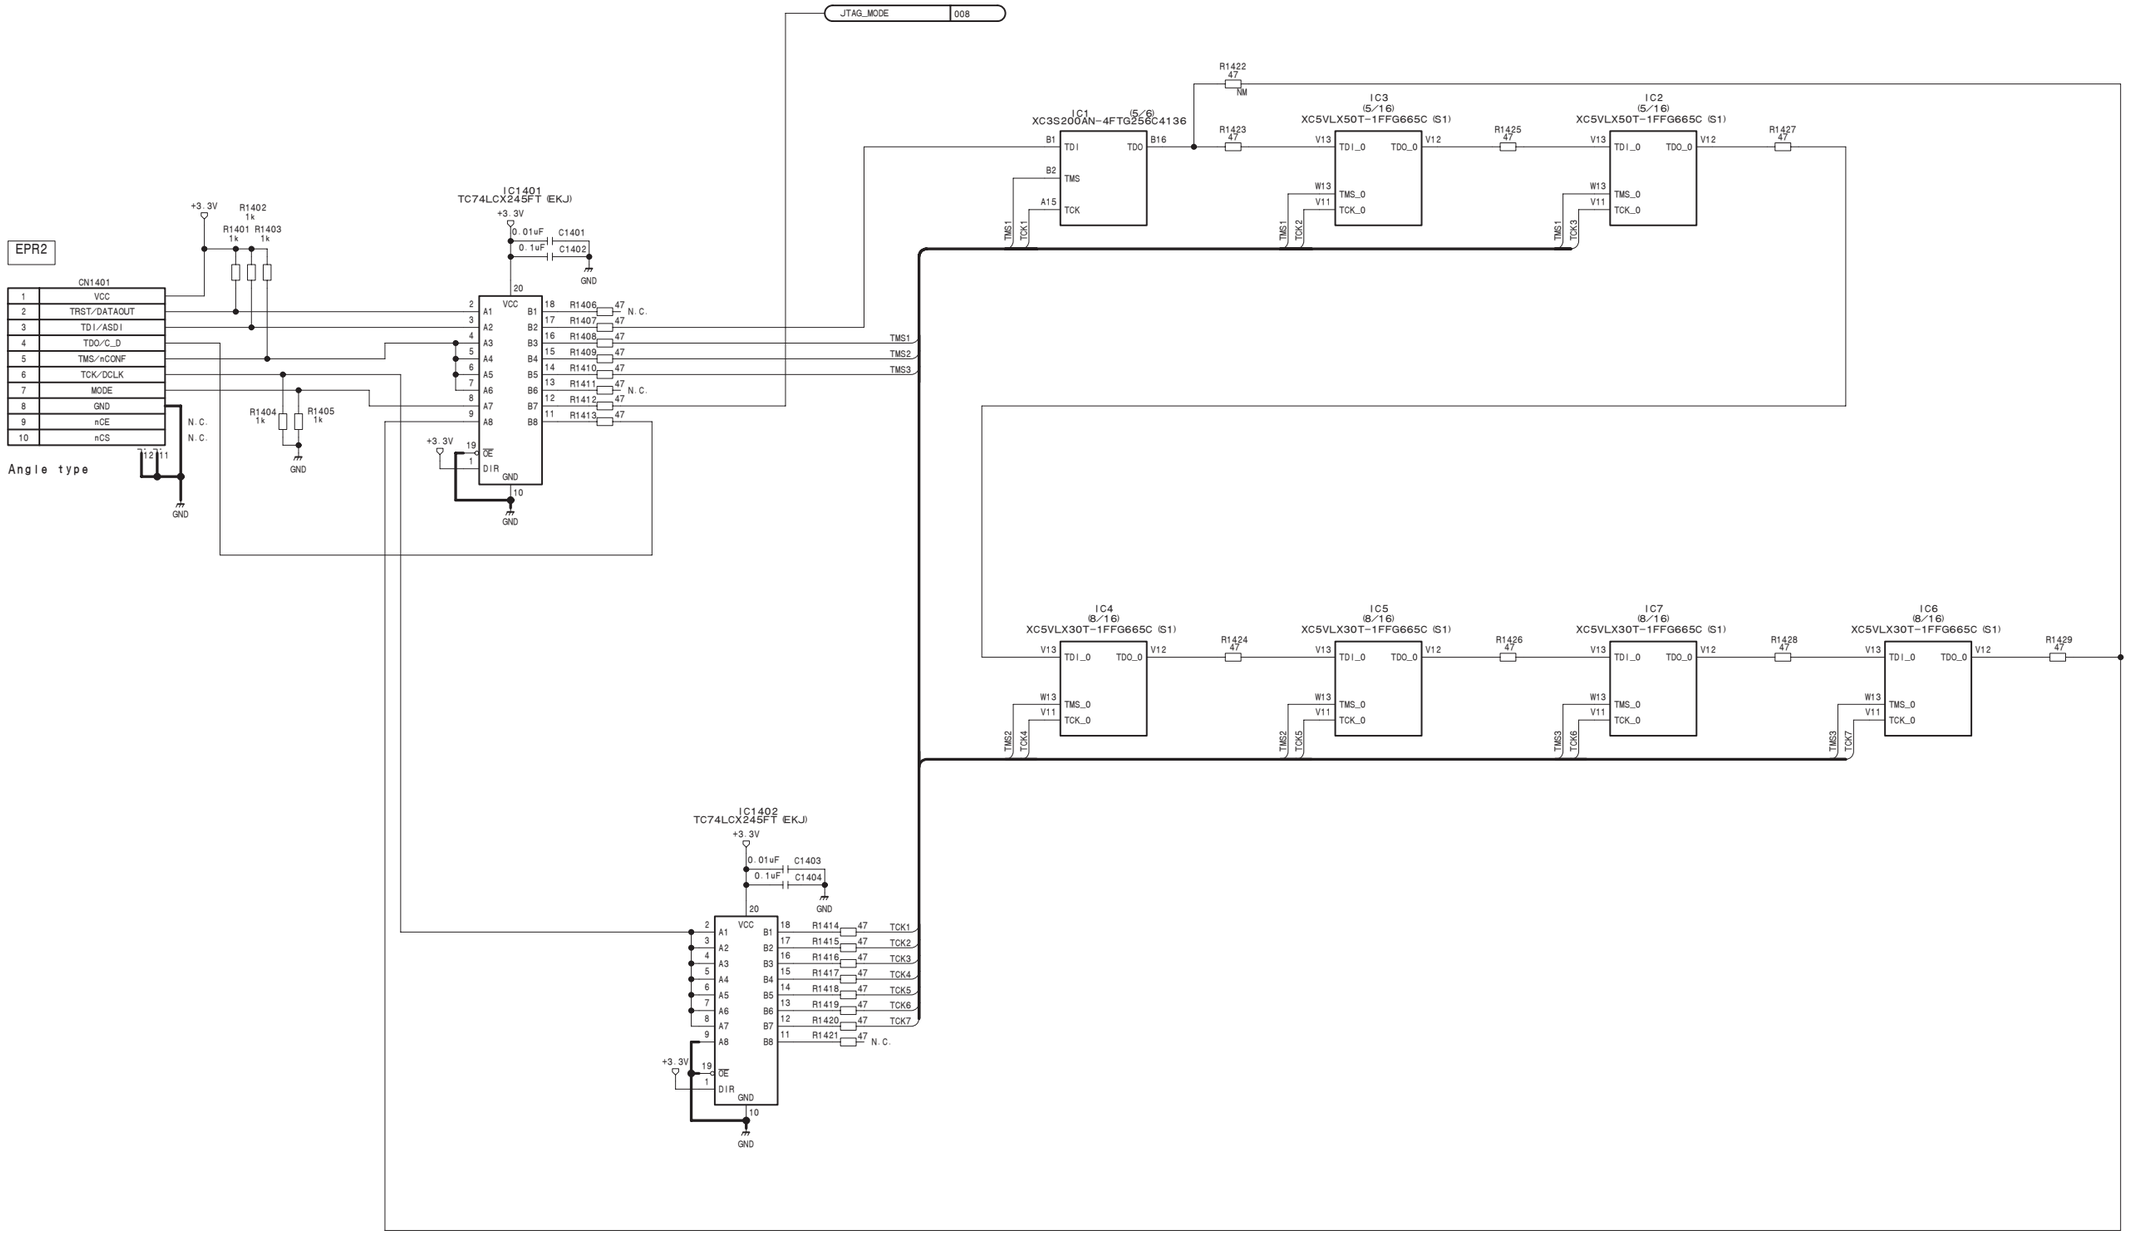

FC-112 (14/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_14

FC-112 (15/40)
SUFFIX: -12

Virtual Module

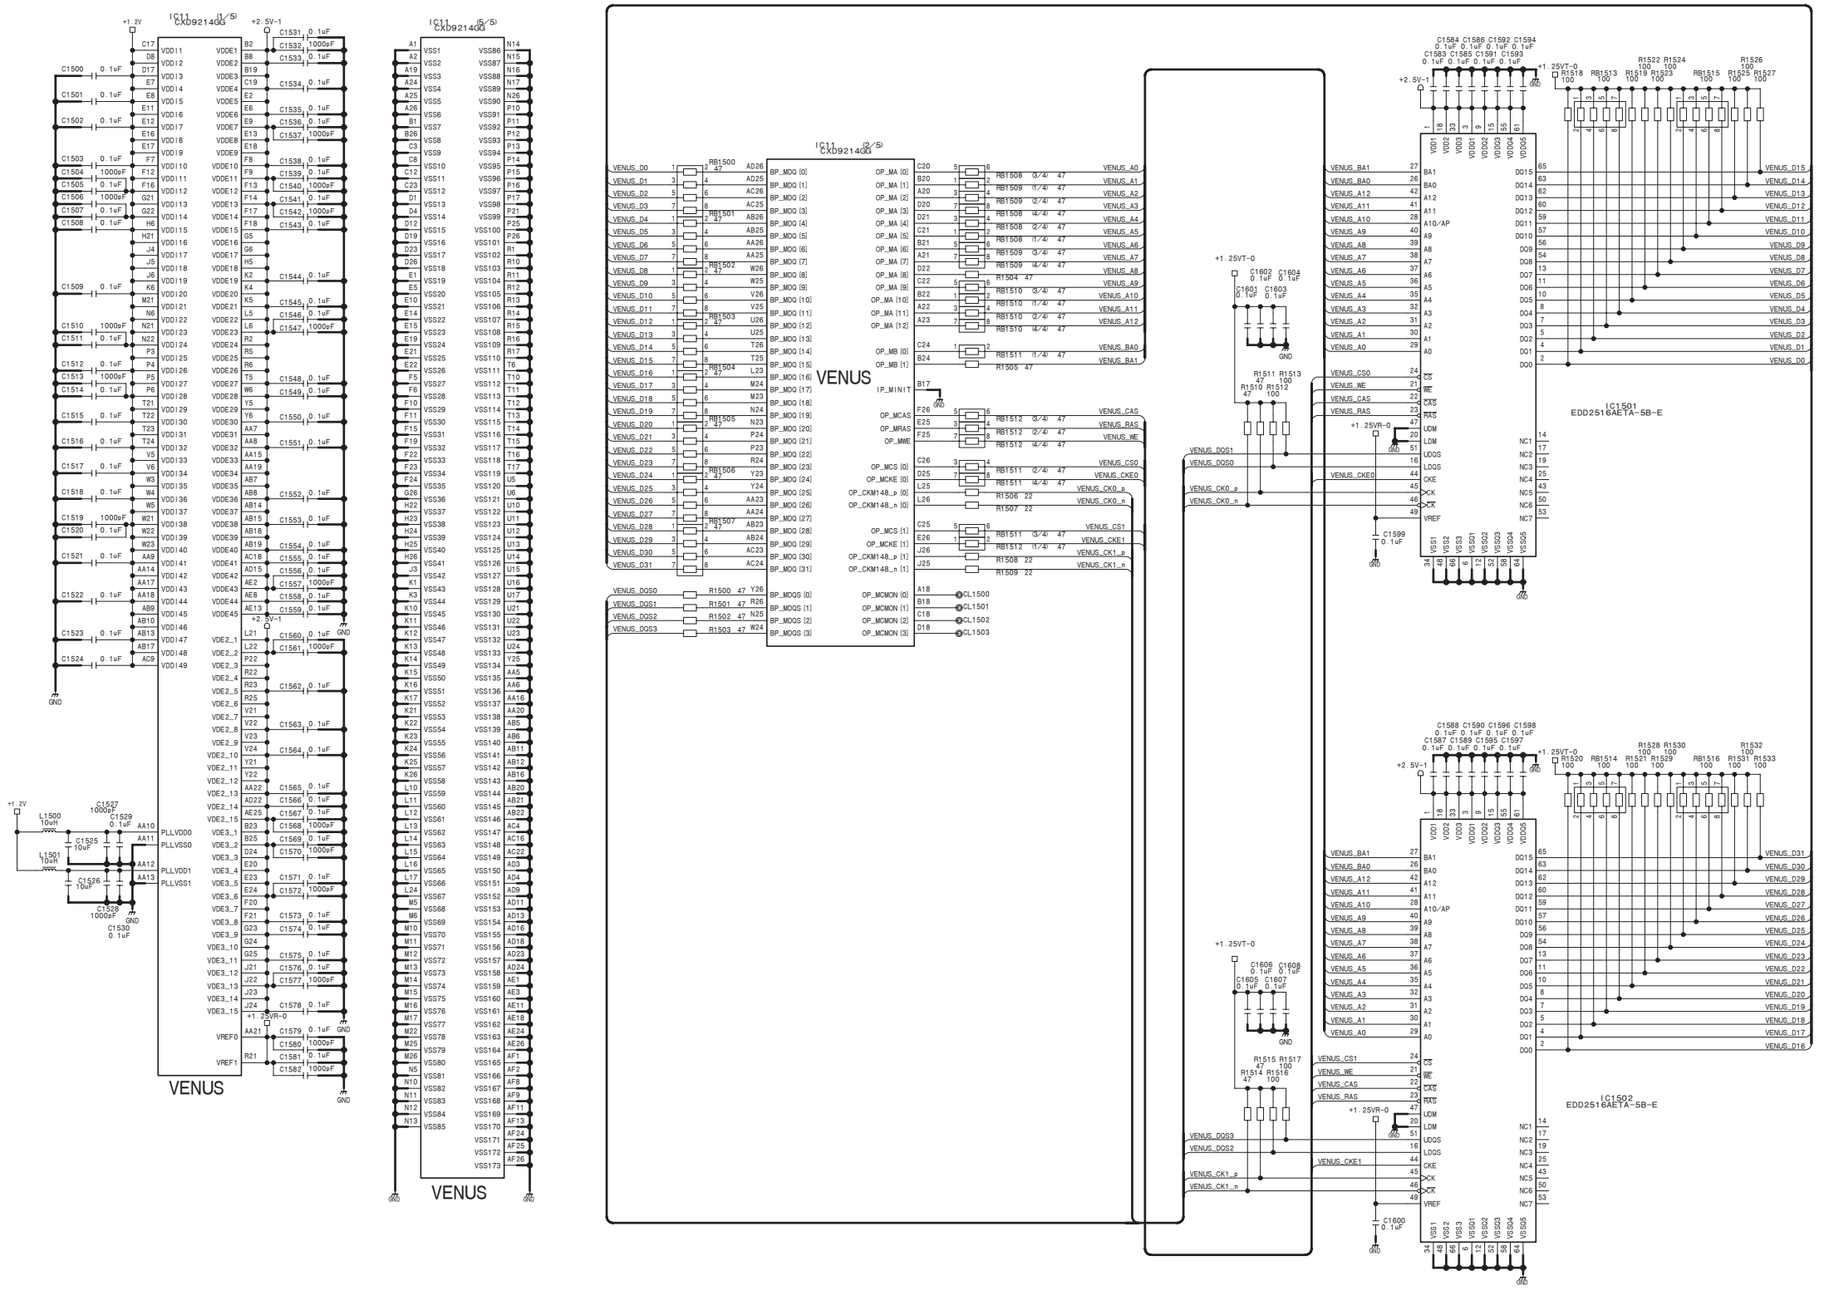

FC MEM (CH1)

FC-112 (15/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_15

FC-112 (16/40)
SUFFIX: -12

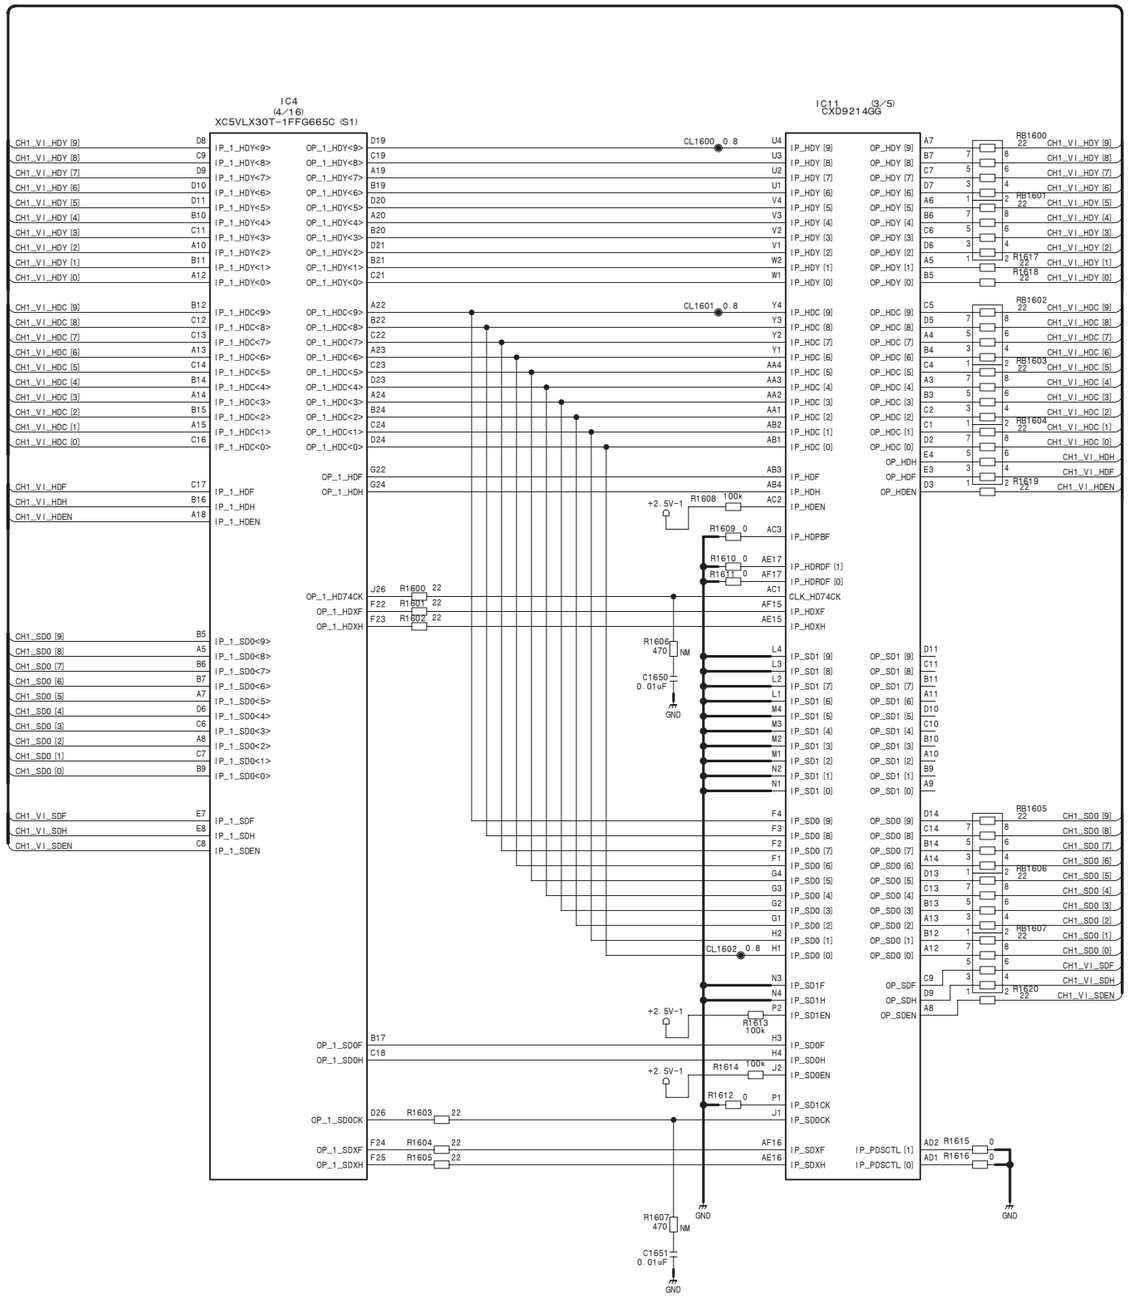

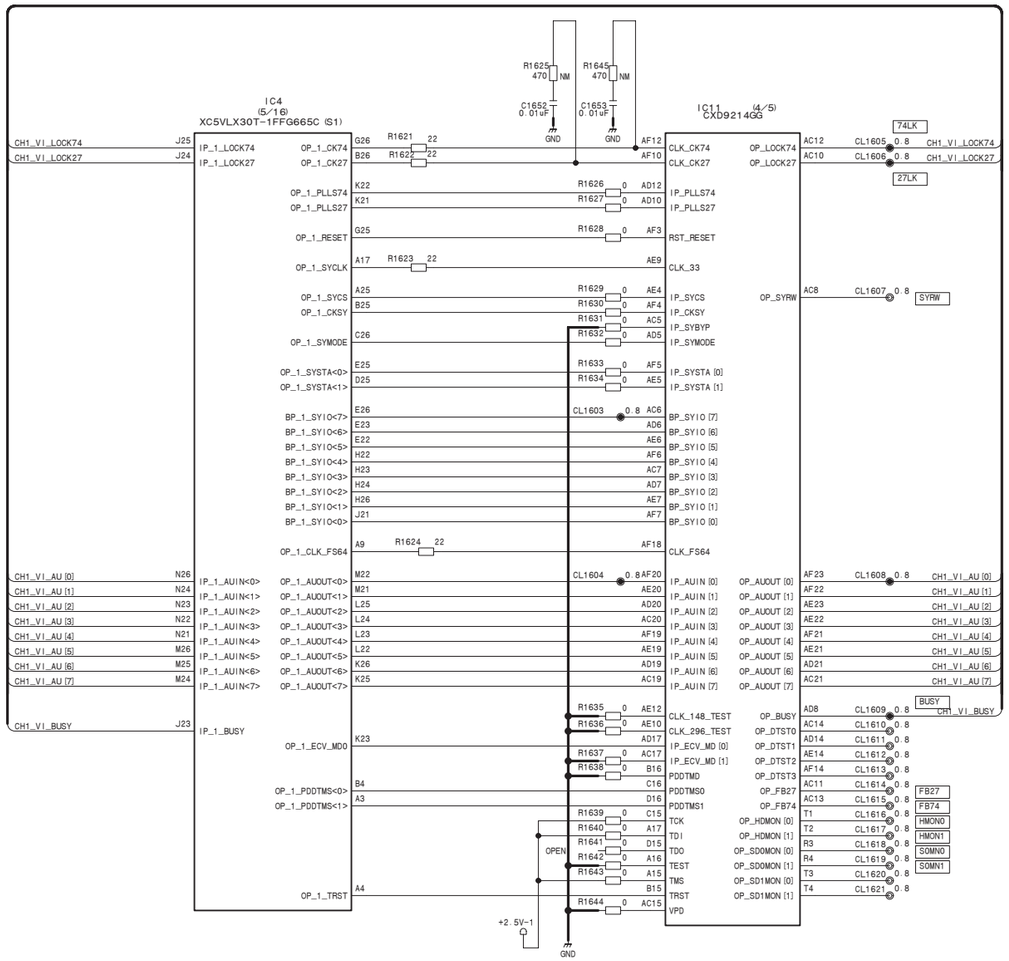

FC (CH1)

FC-112 (16/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_16

Virtual Module

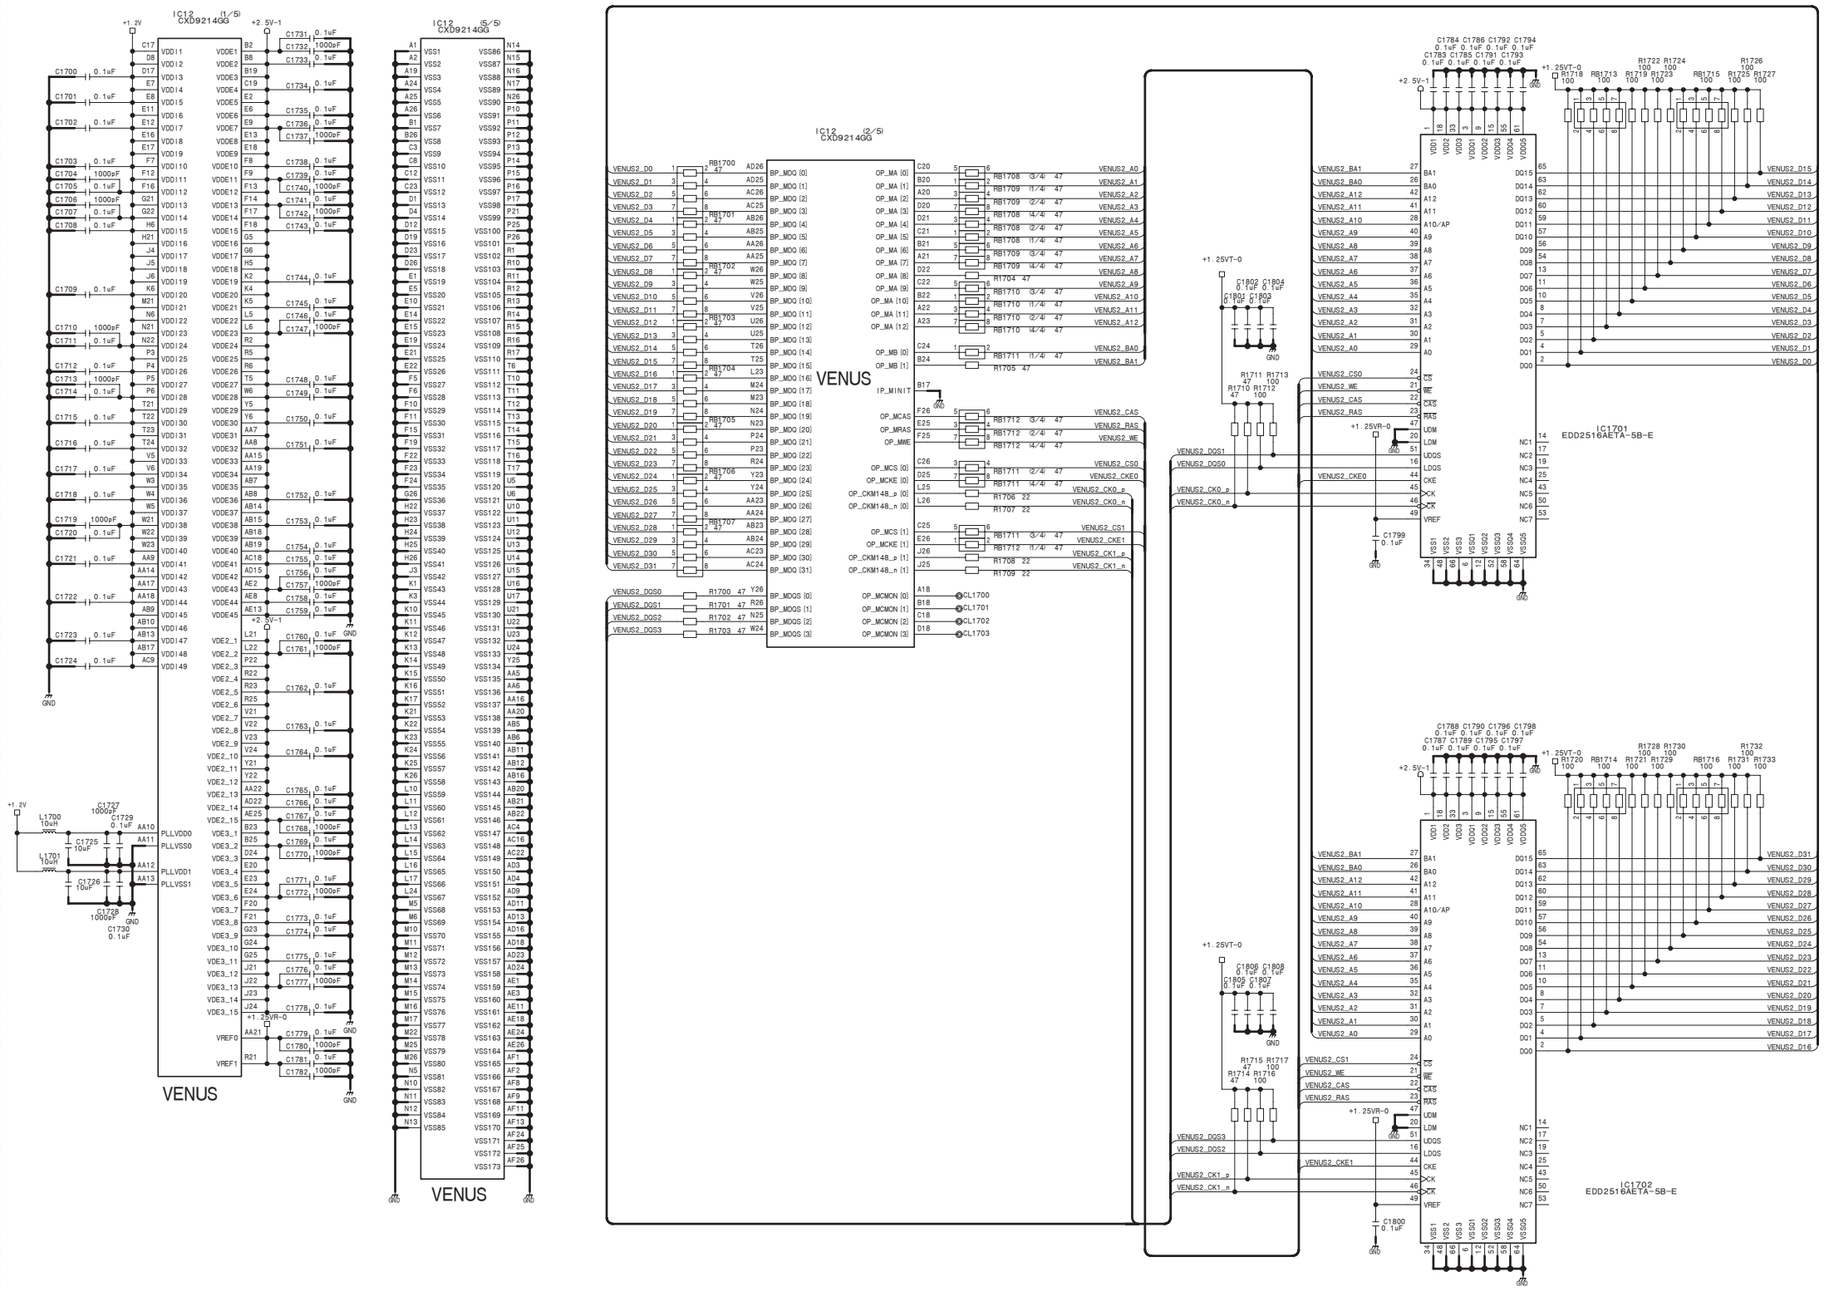

FC MEM (CH2)

FC-112 (17/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_17

FC-112 (18/40)
SUFFIX: -12

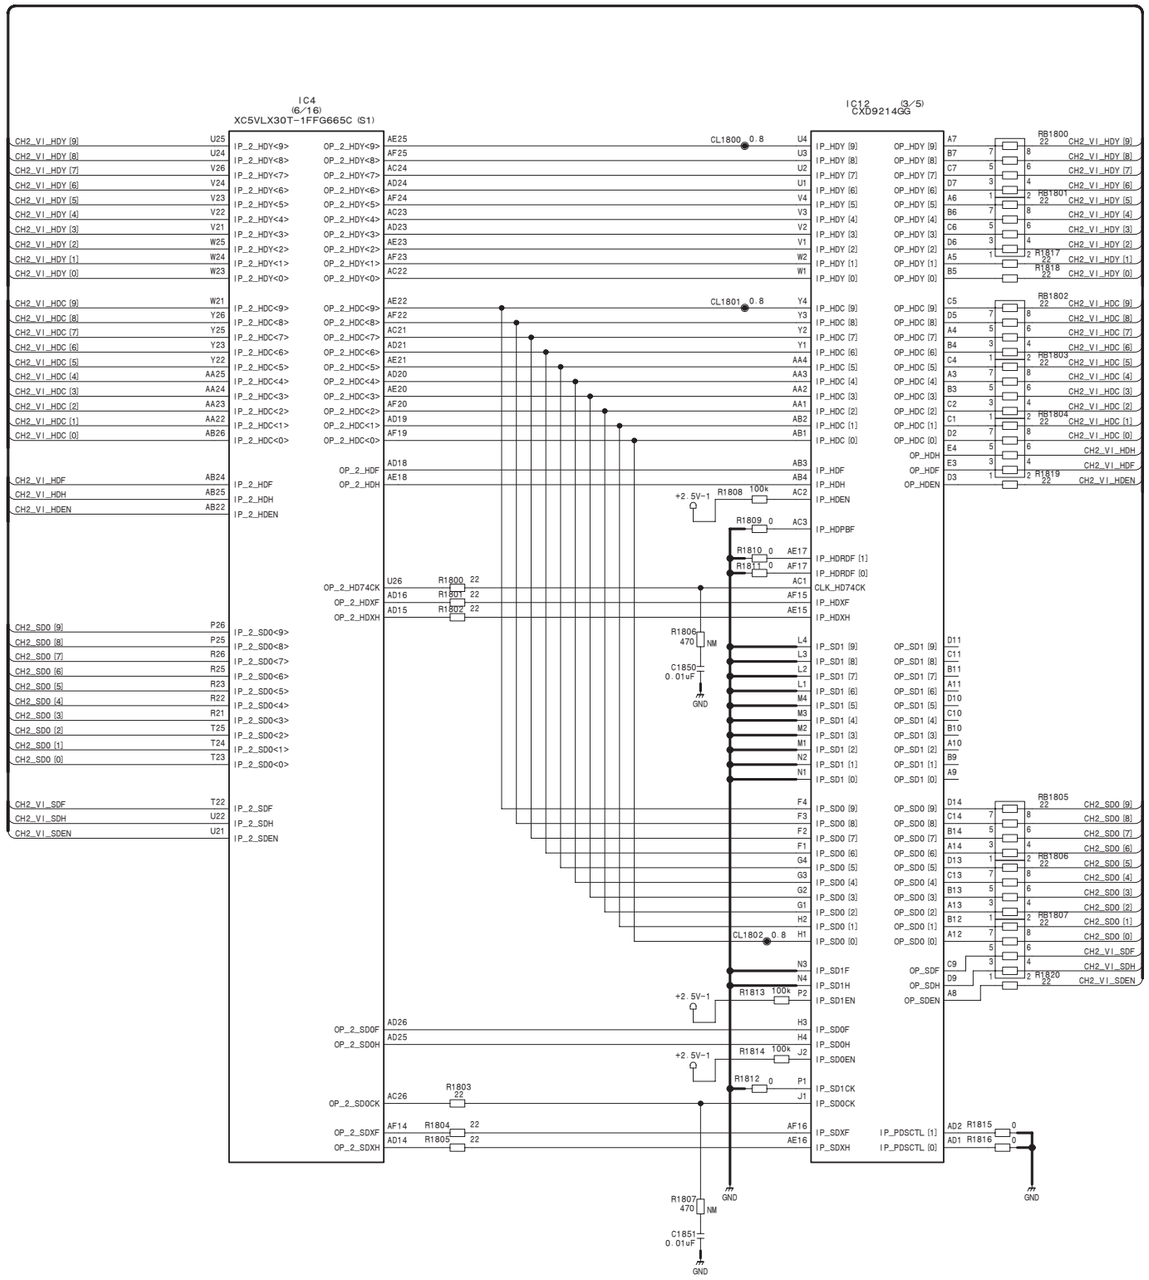

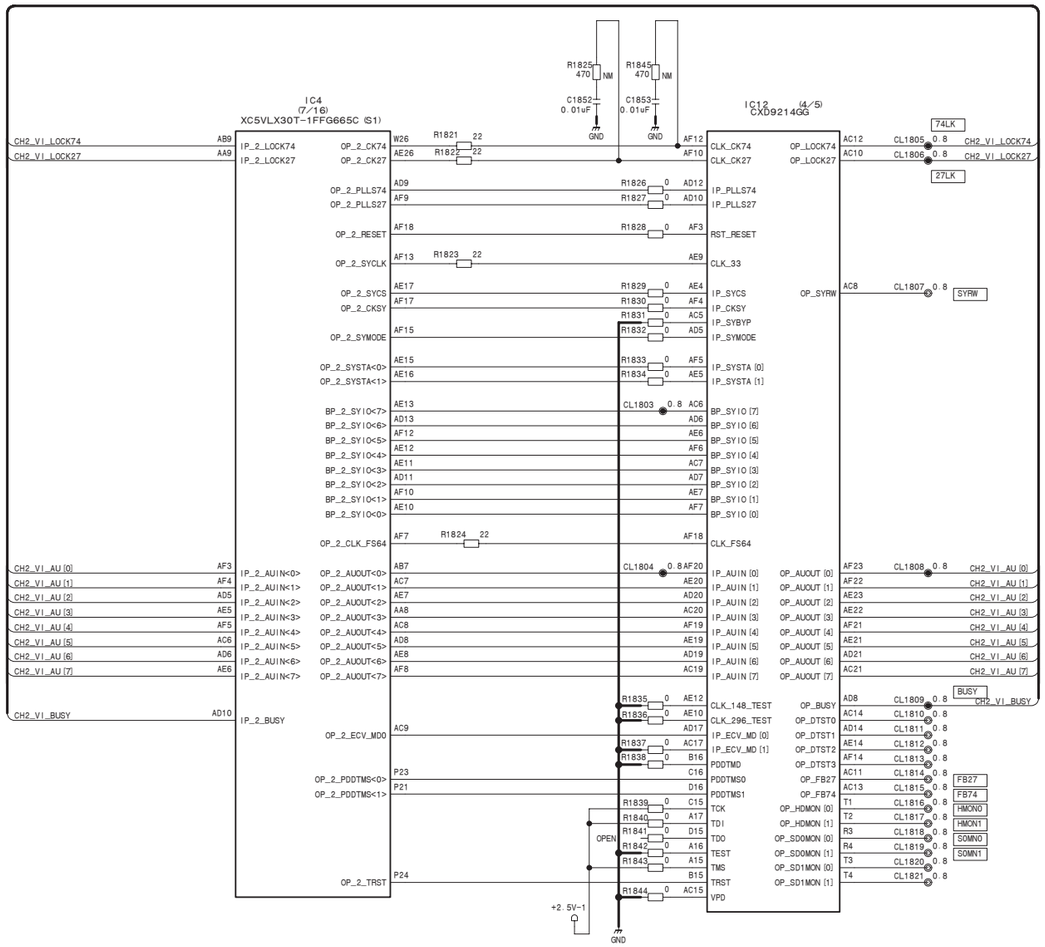

FC (CH2)

FC-112 (18/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_18

Virtual Module

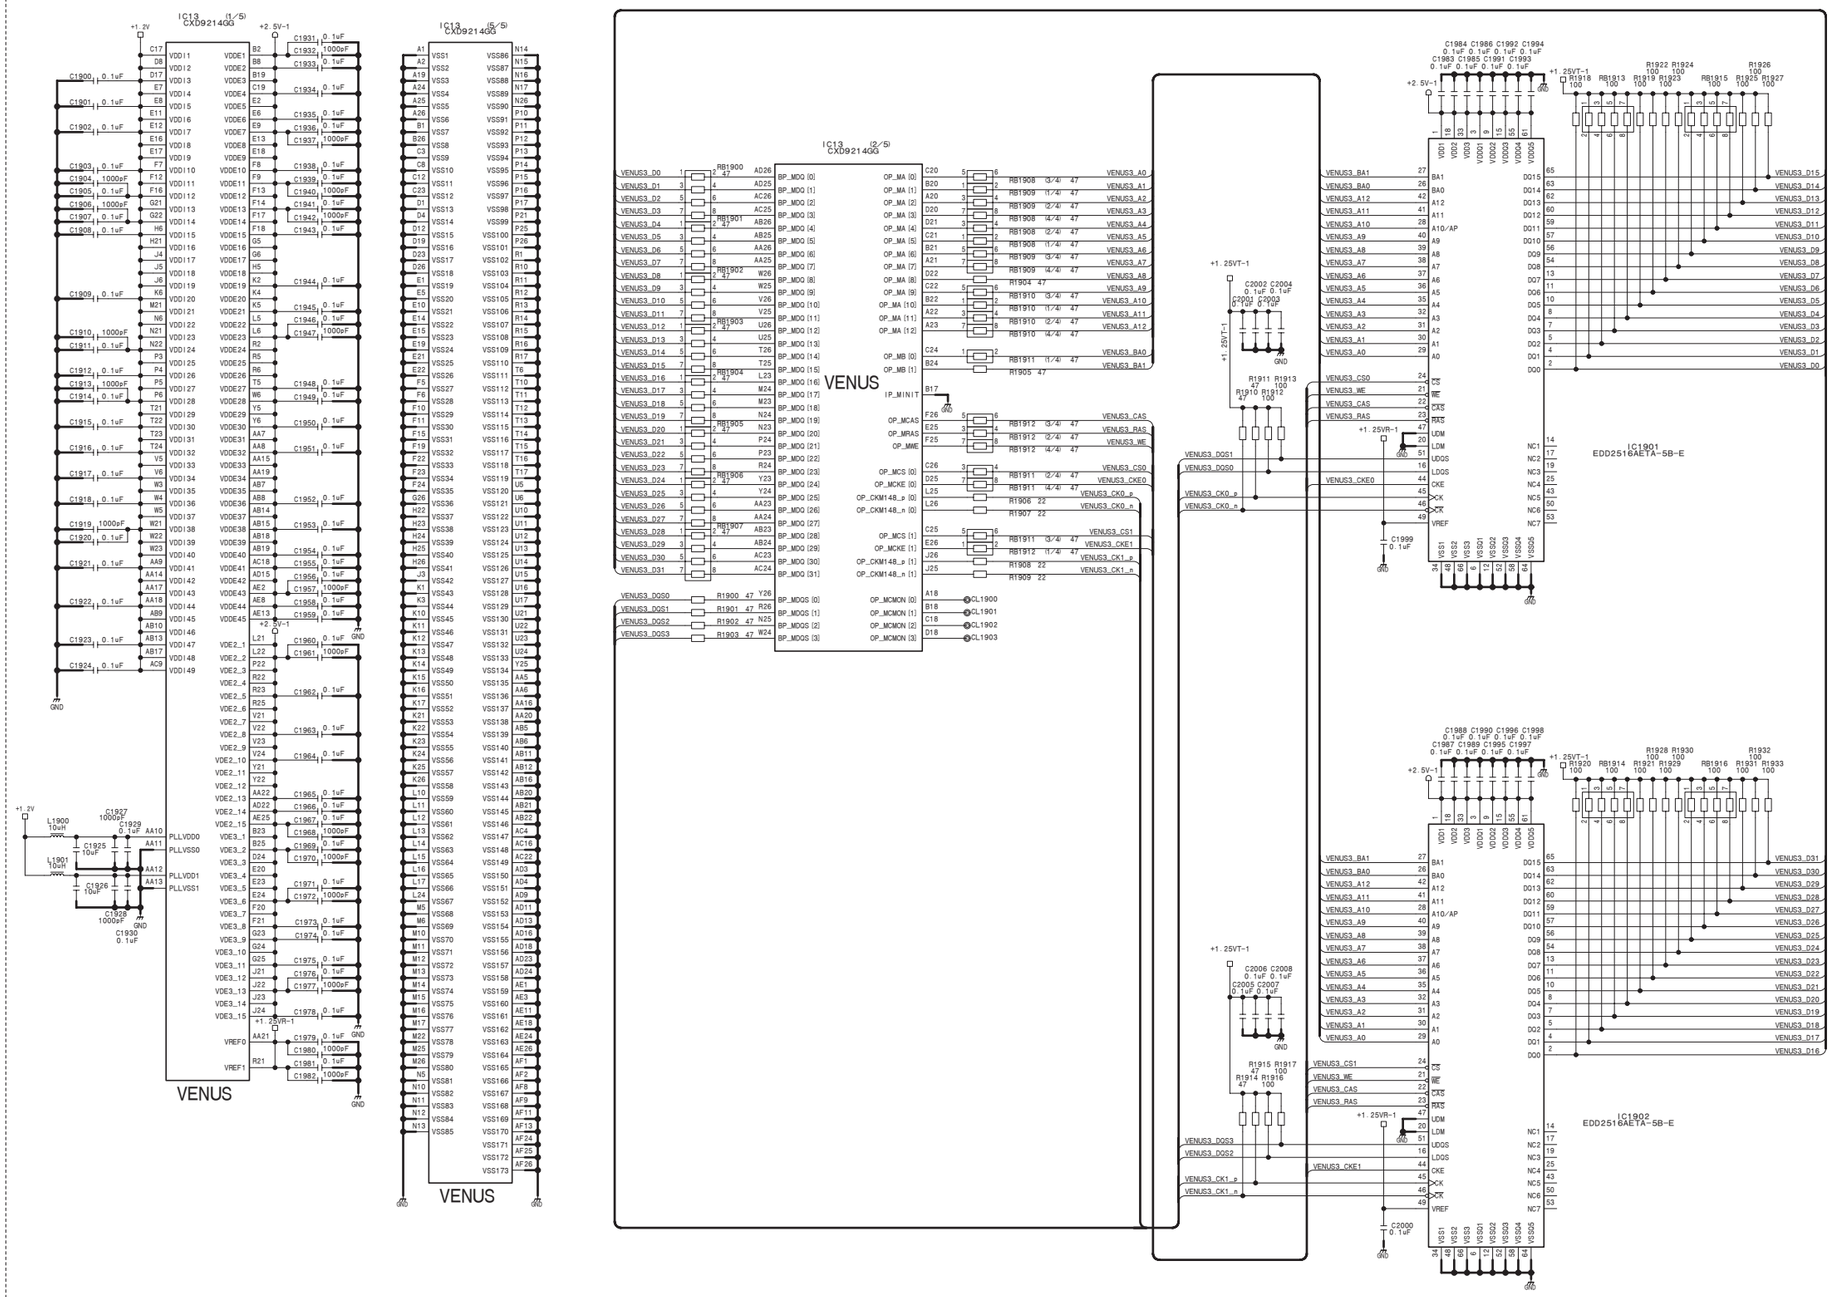

FC MEM (CH3)

FC-112 (19/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_19

FC-112 (20/40)
SUFFIX: -12

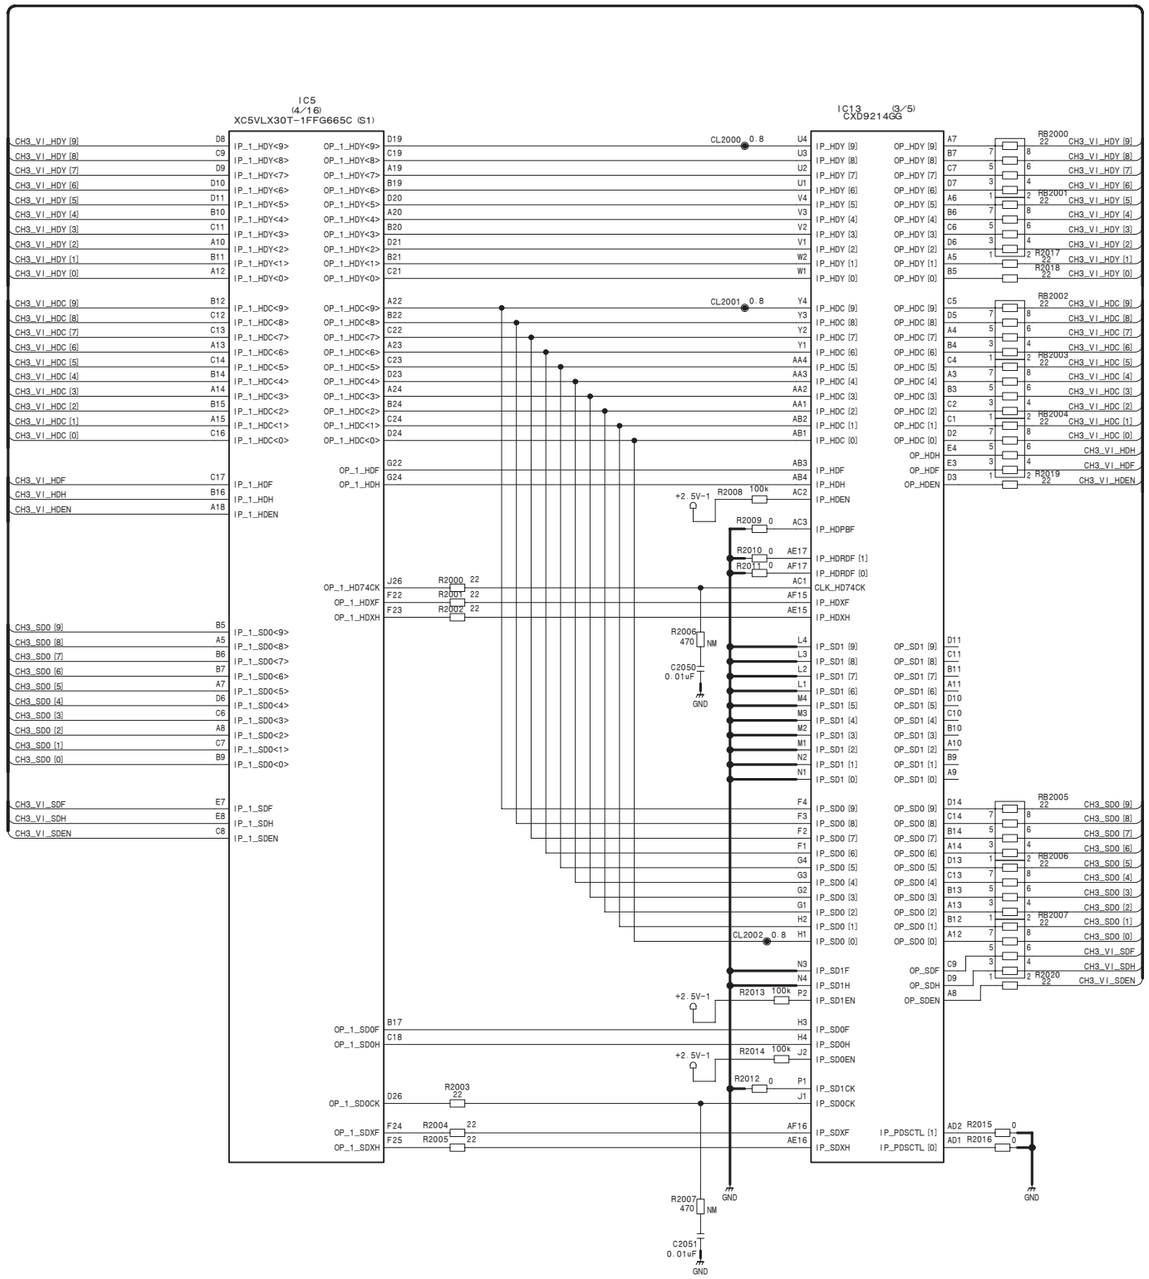

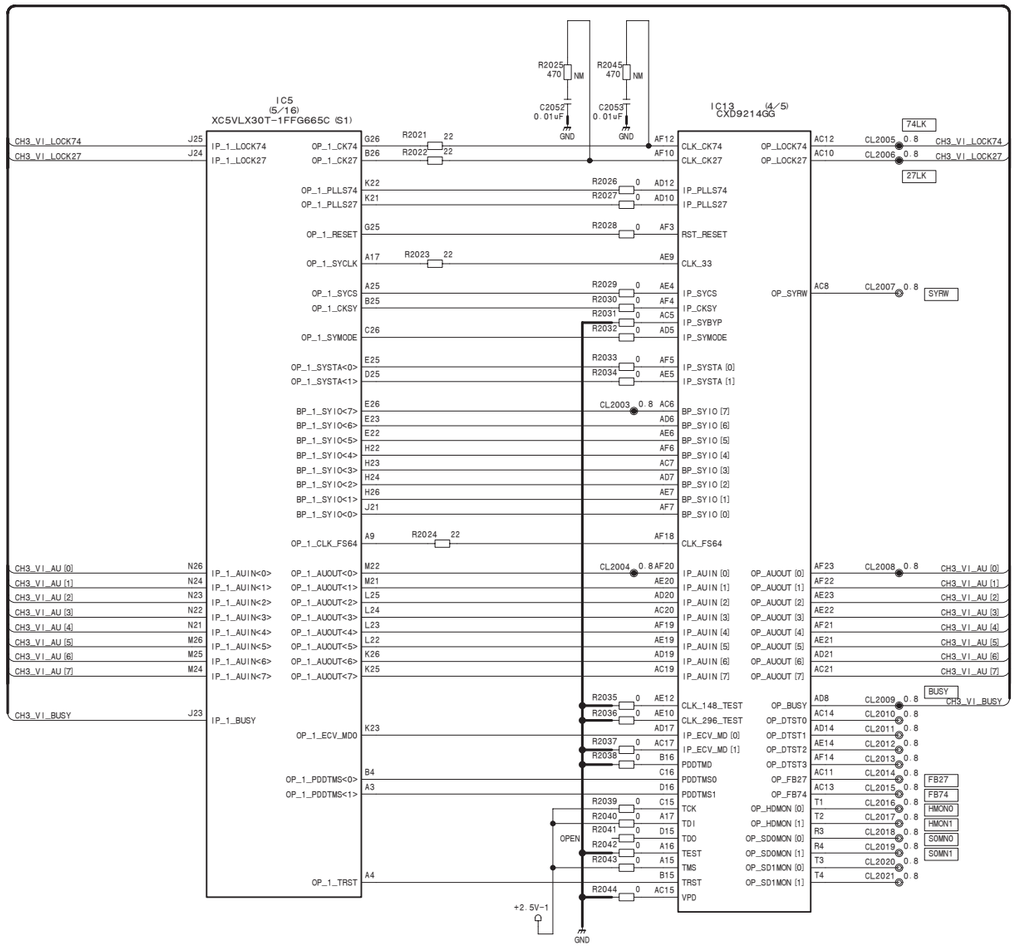

FC (CH3)

FC-112 (20/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_20

Virtual Module

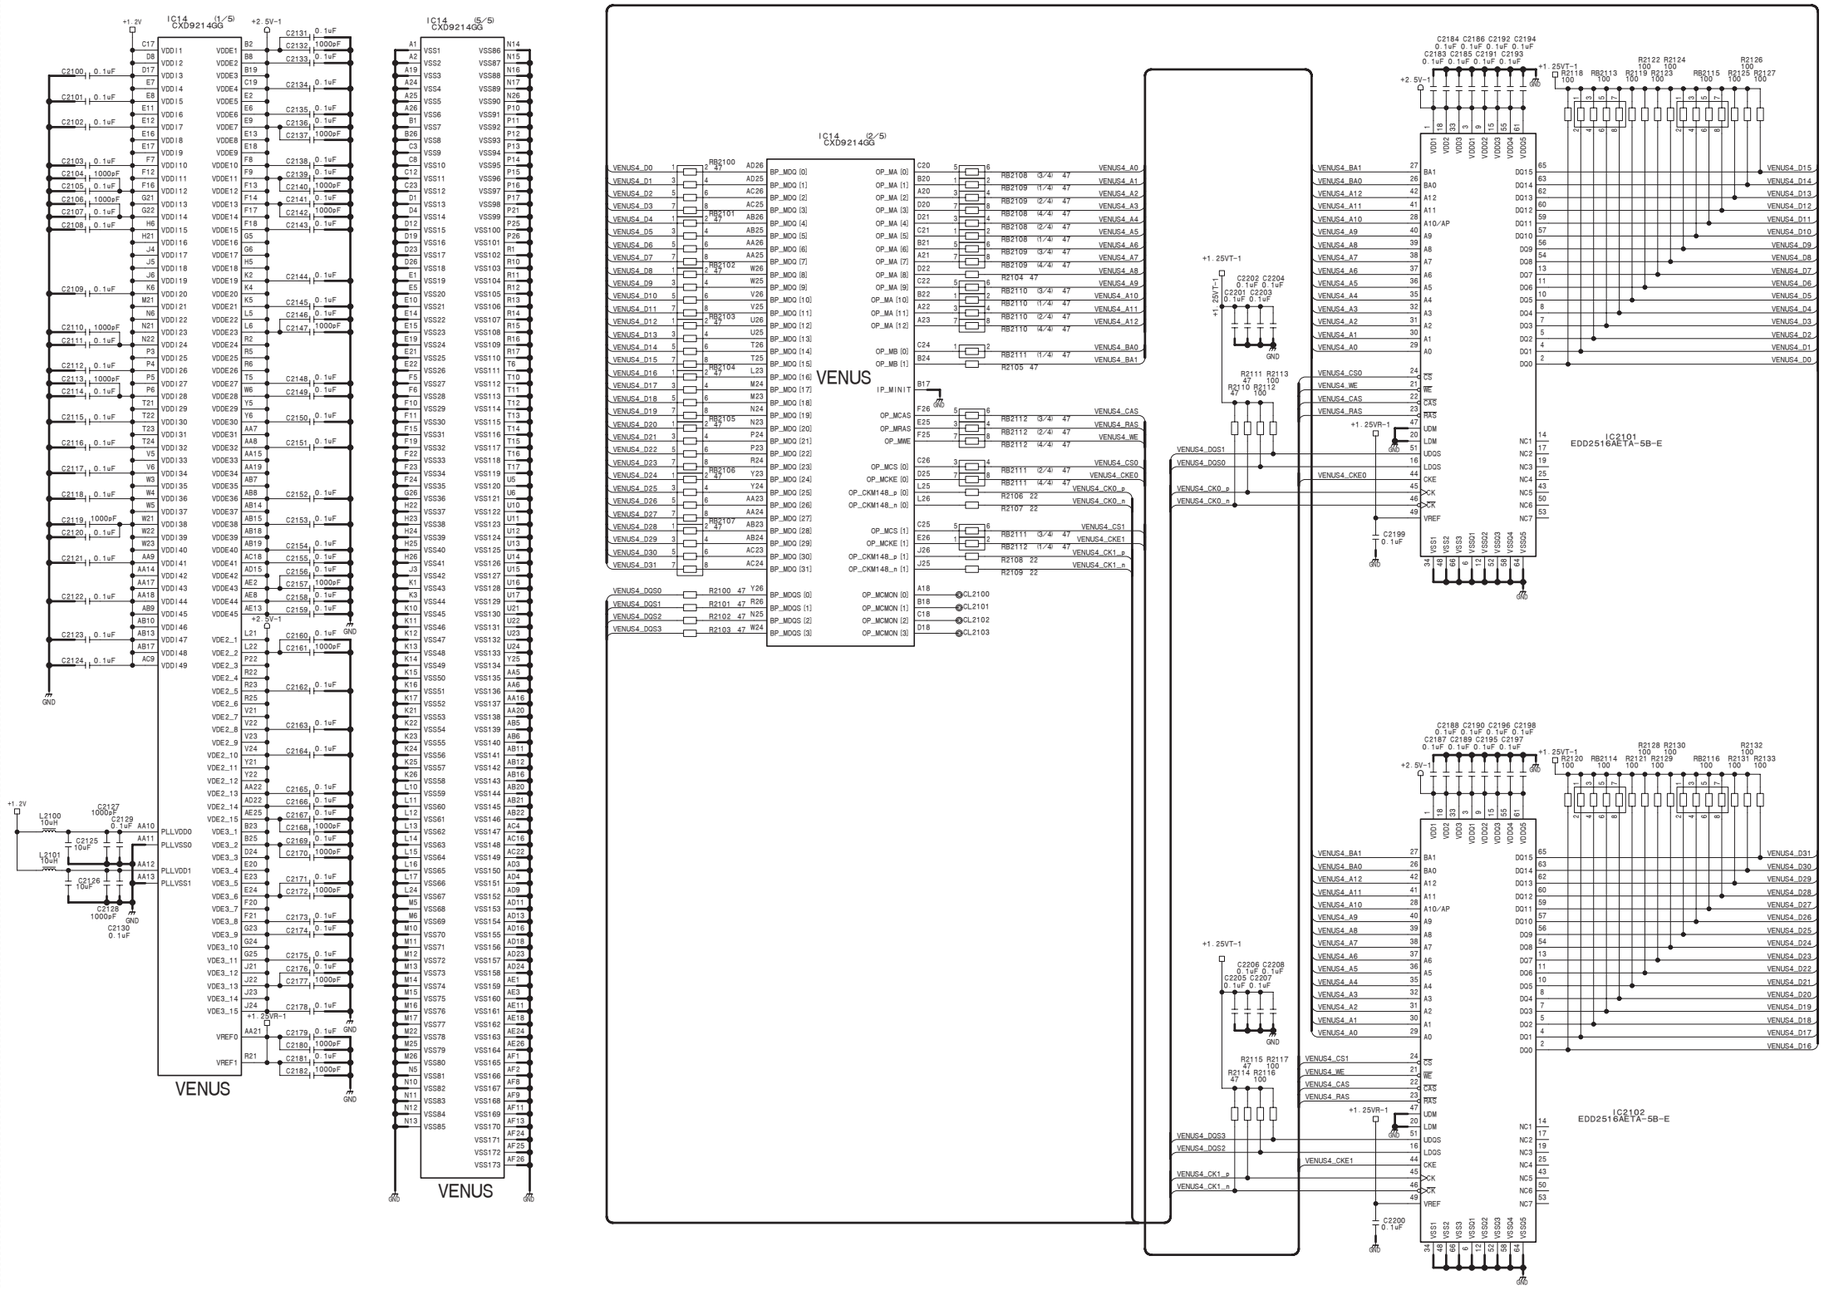

FC MEM (CH4)

FC-112 (21/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_21

FC-112 (22/40)
SUFFIX: -12

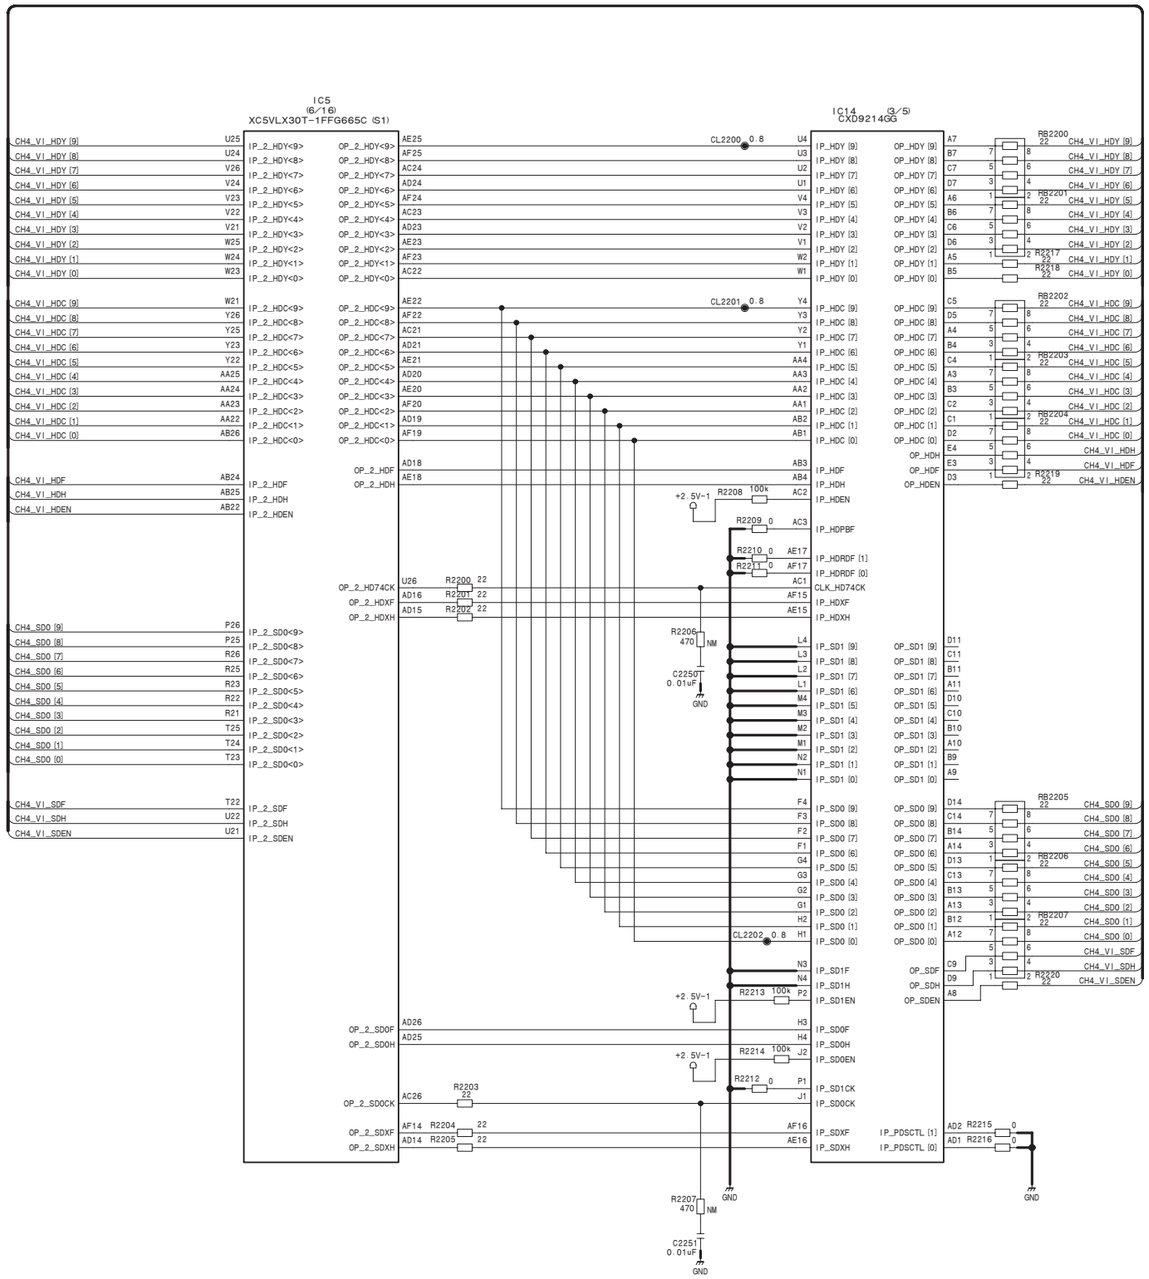

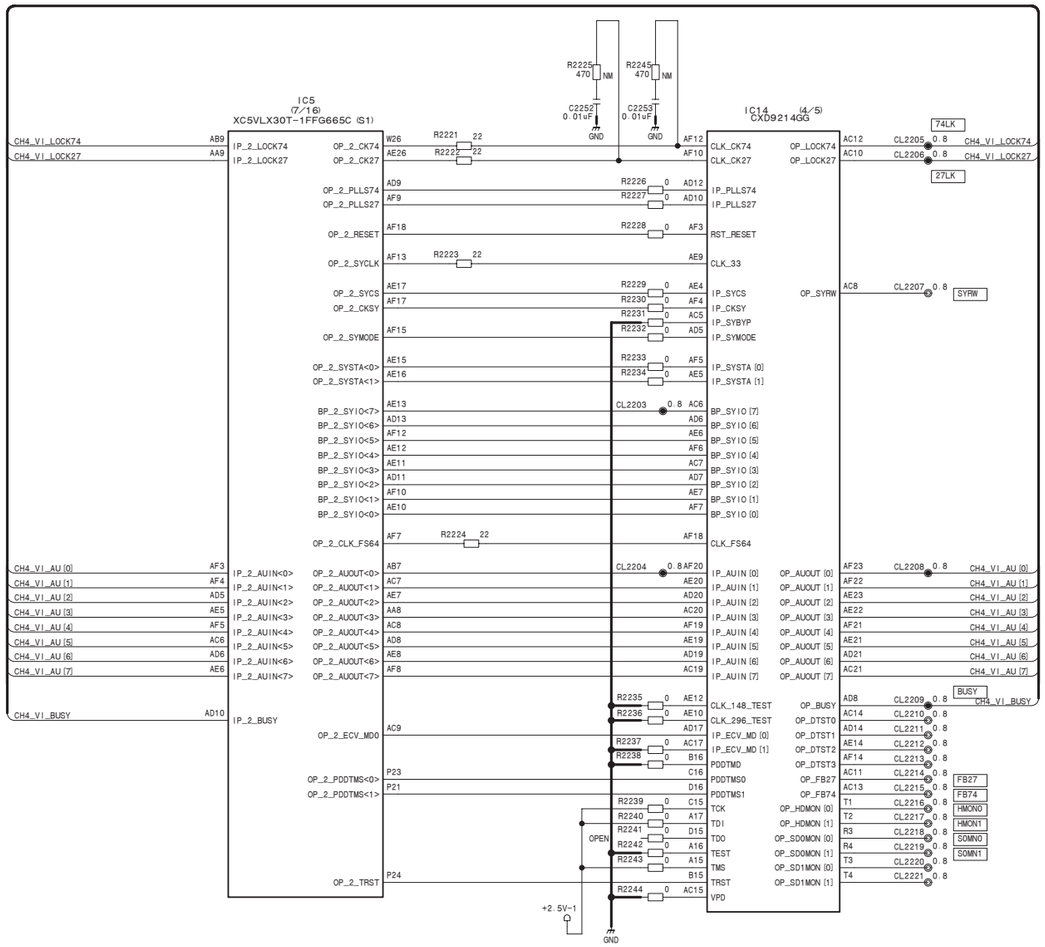

FC (CH4)

FC-112 (22/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_22

FC-112 (23/40) SUFFIX: -12

Virtual Module

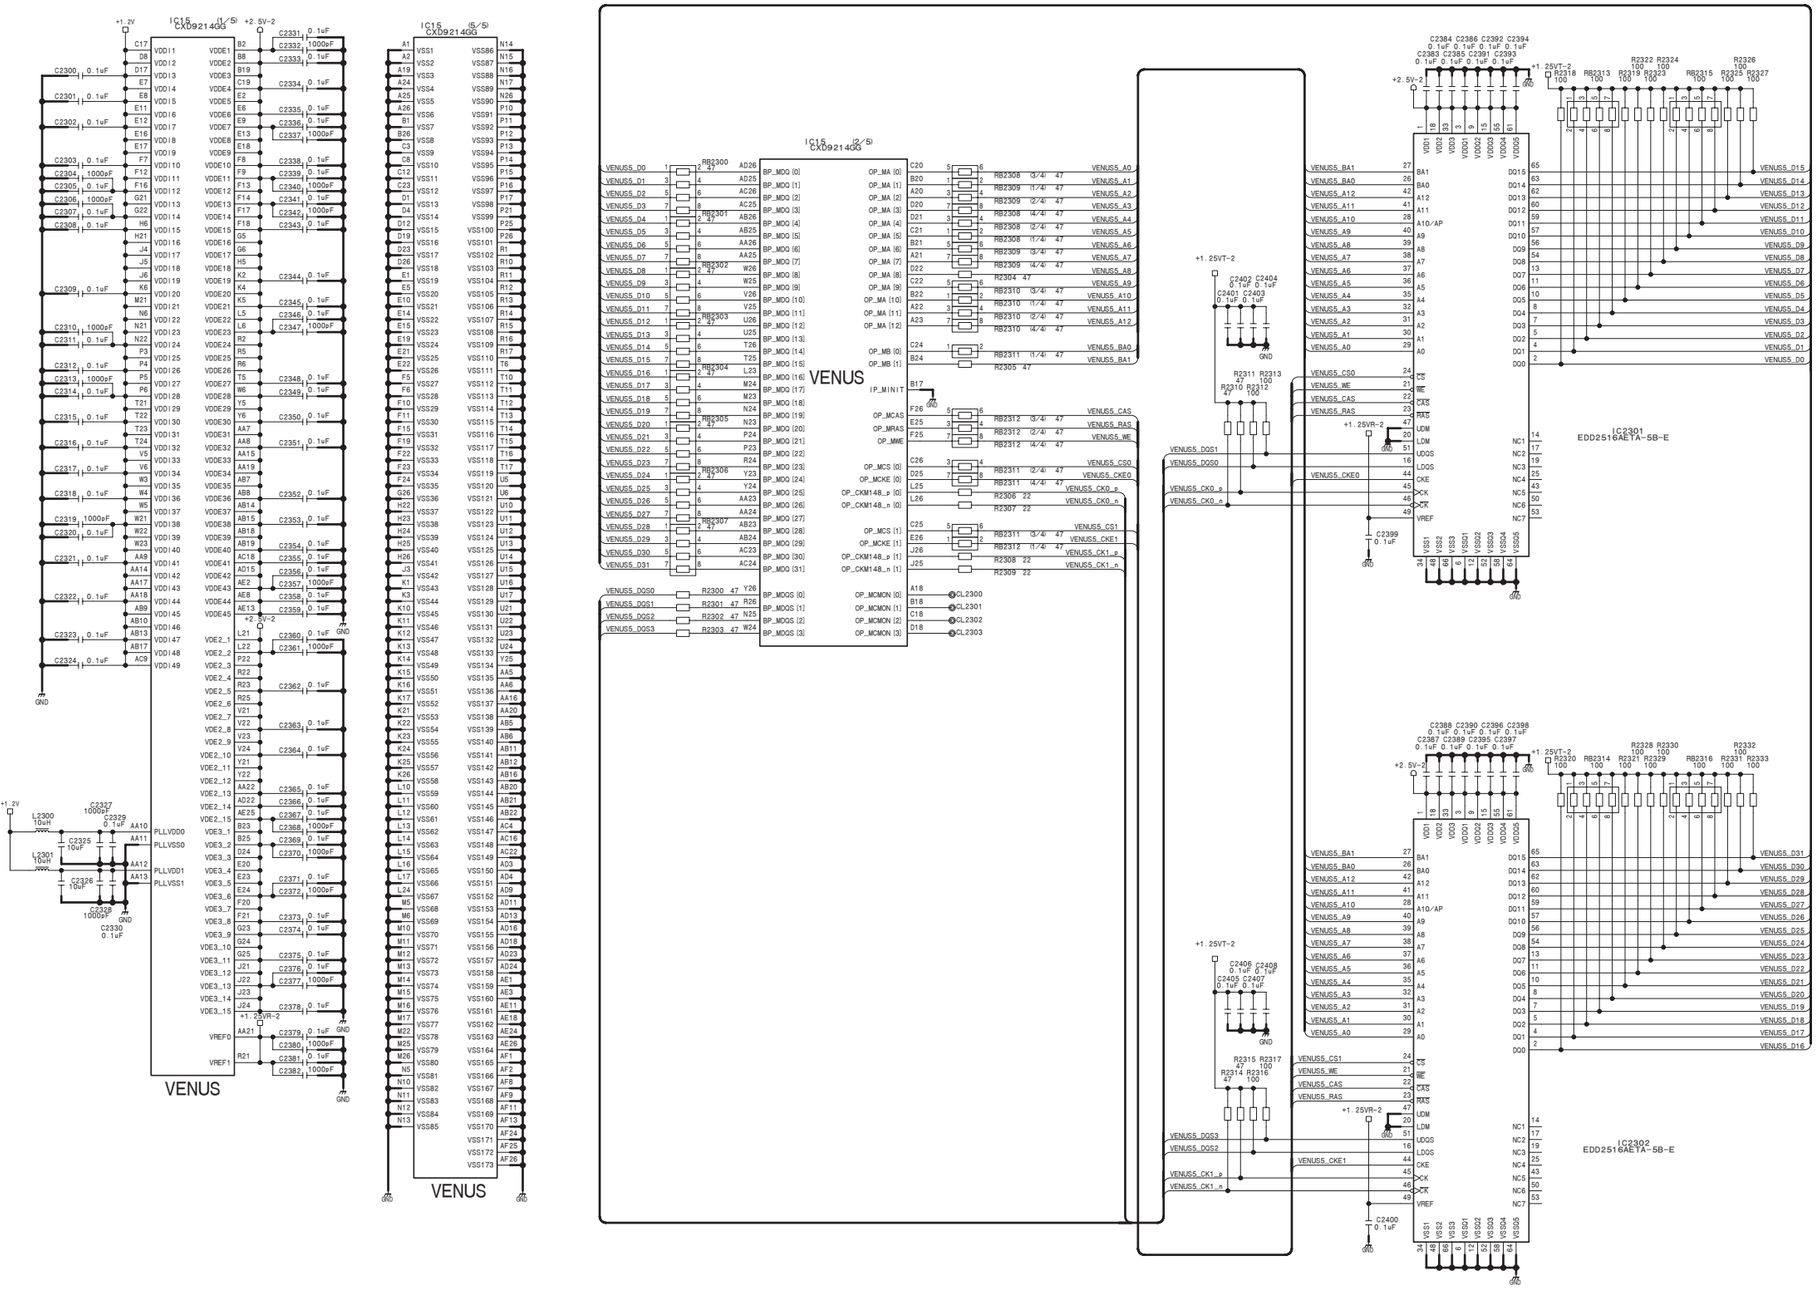

FC MEM (CH5)

FC-112 (23/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_23

FC-112 (24/40)
SUFFIX: -12

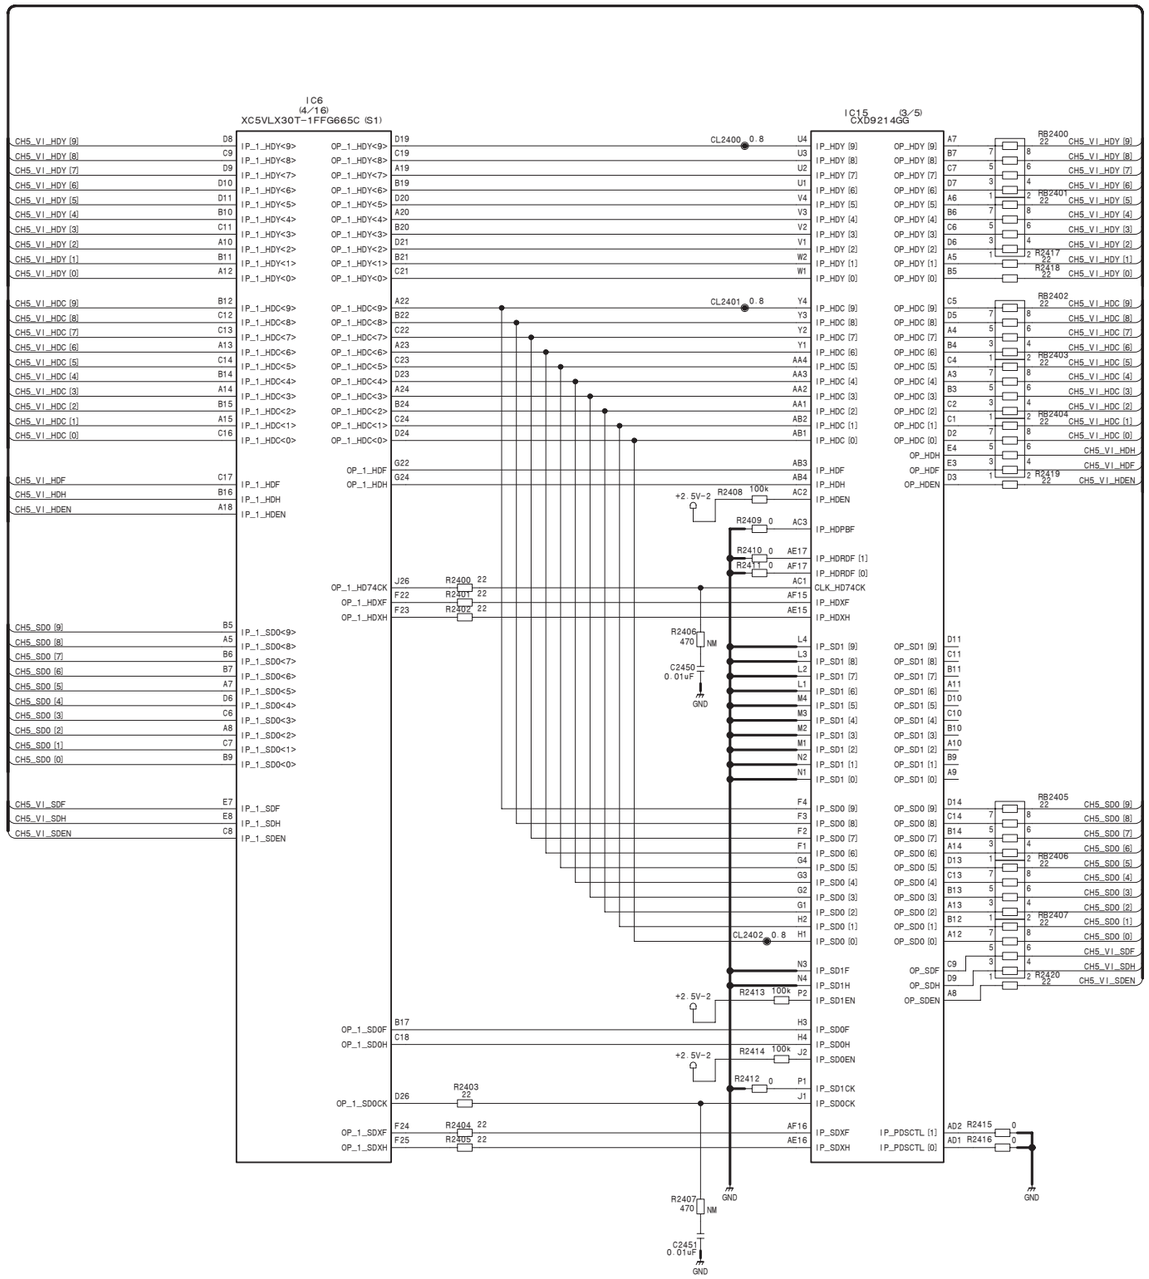

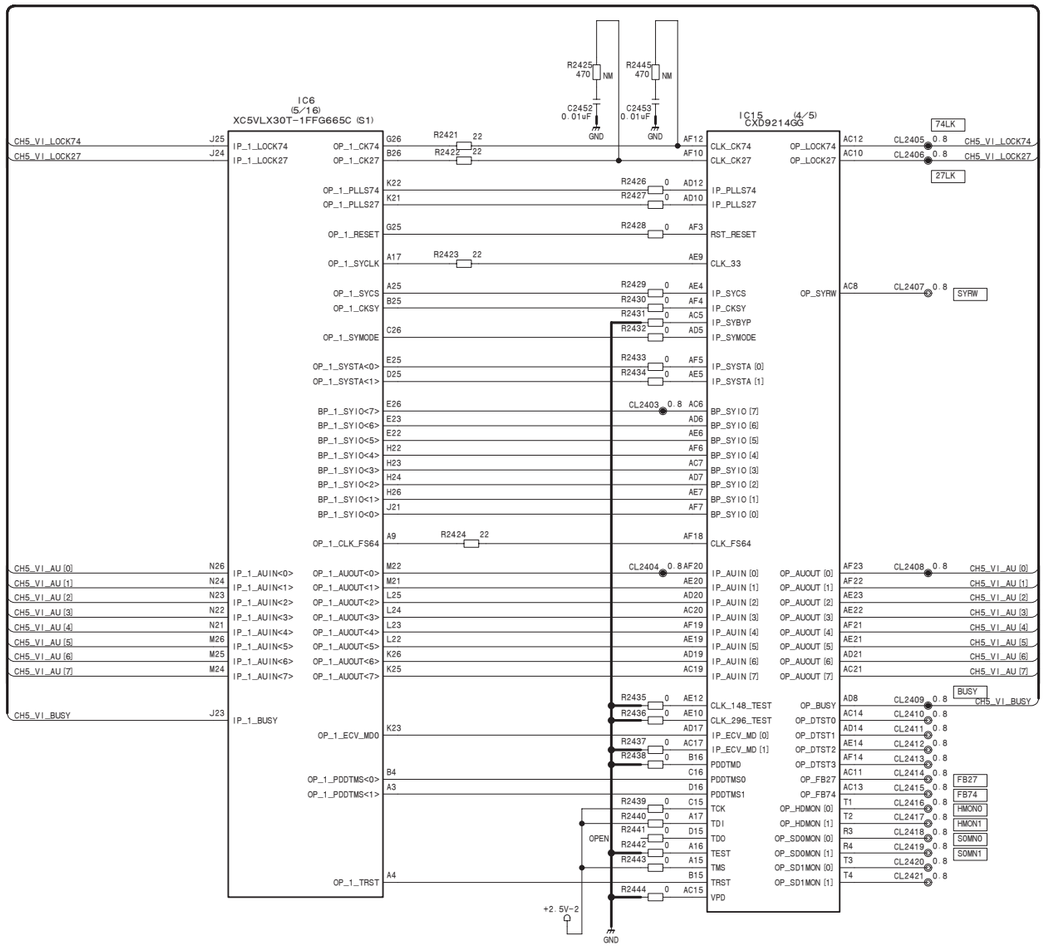

FC (CH5)

FC-112 (24/40)

BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_24

Virtual Module

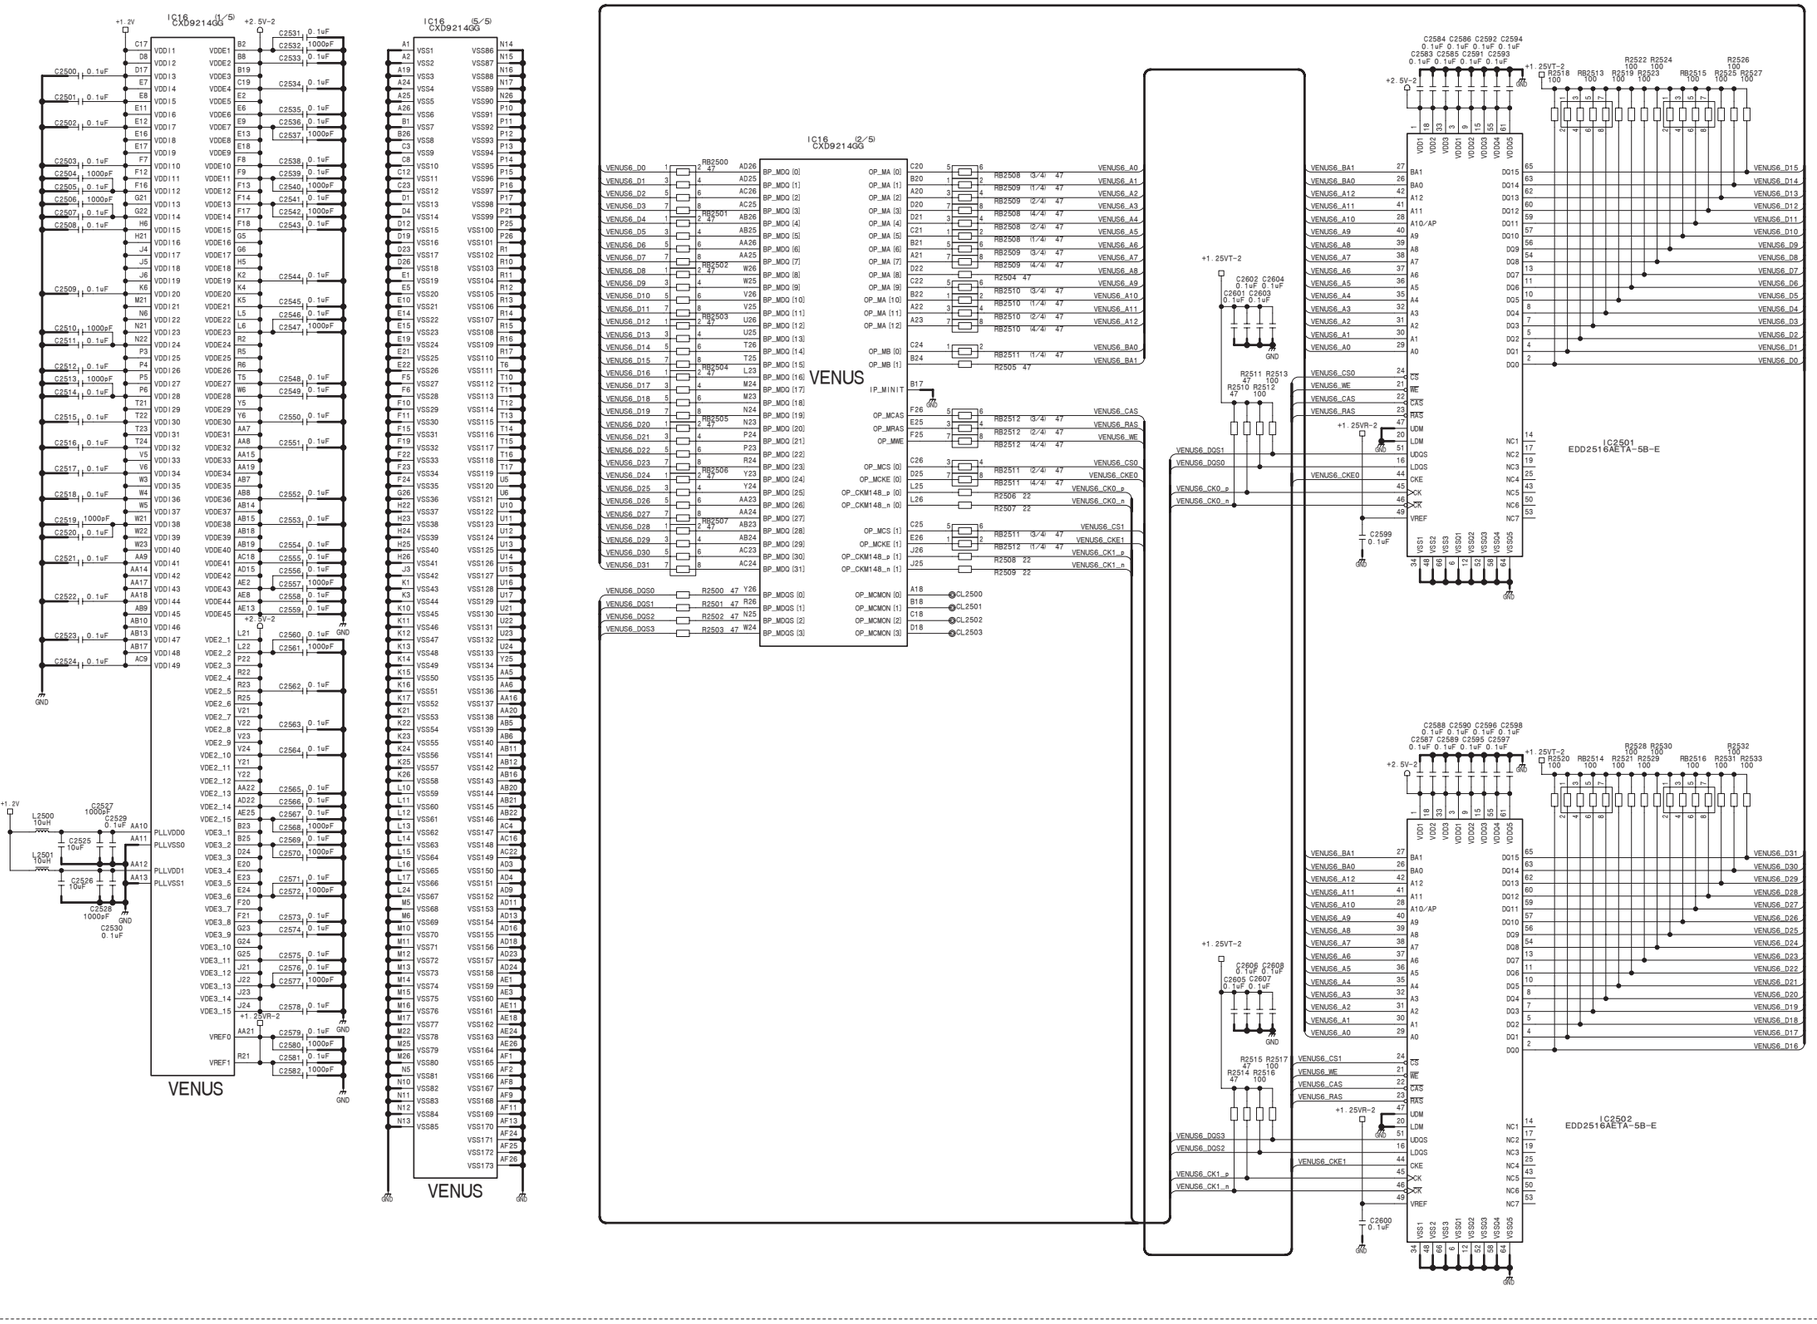

FC MEM (CH6)

FC-112 (25/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_25

FC-112 (26/40)

SUFFIX: -12

FC-112 (26/40)

SUFFIX: -12

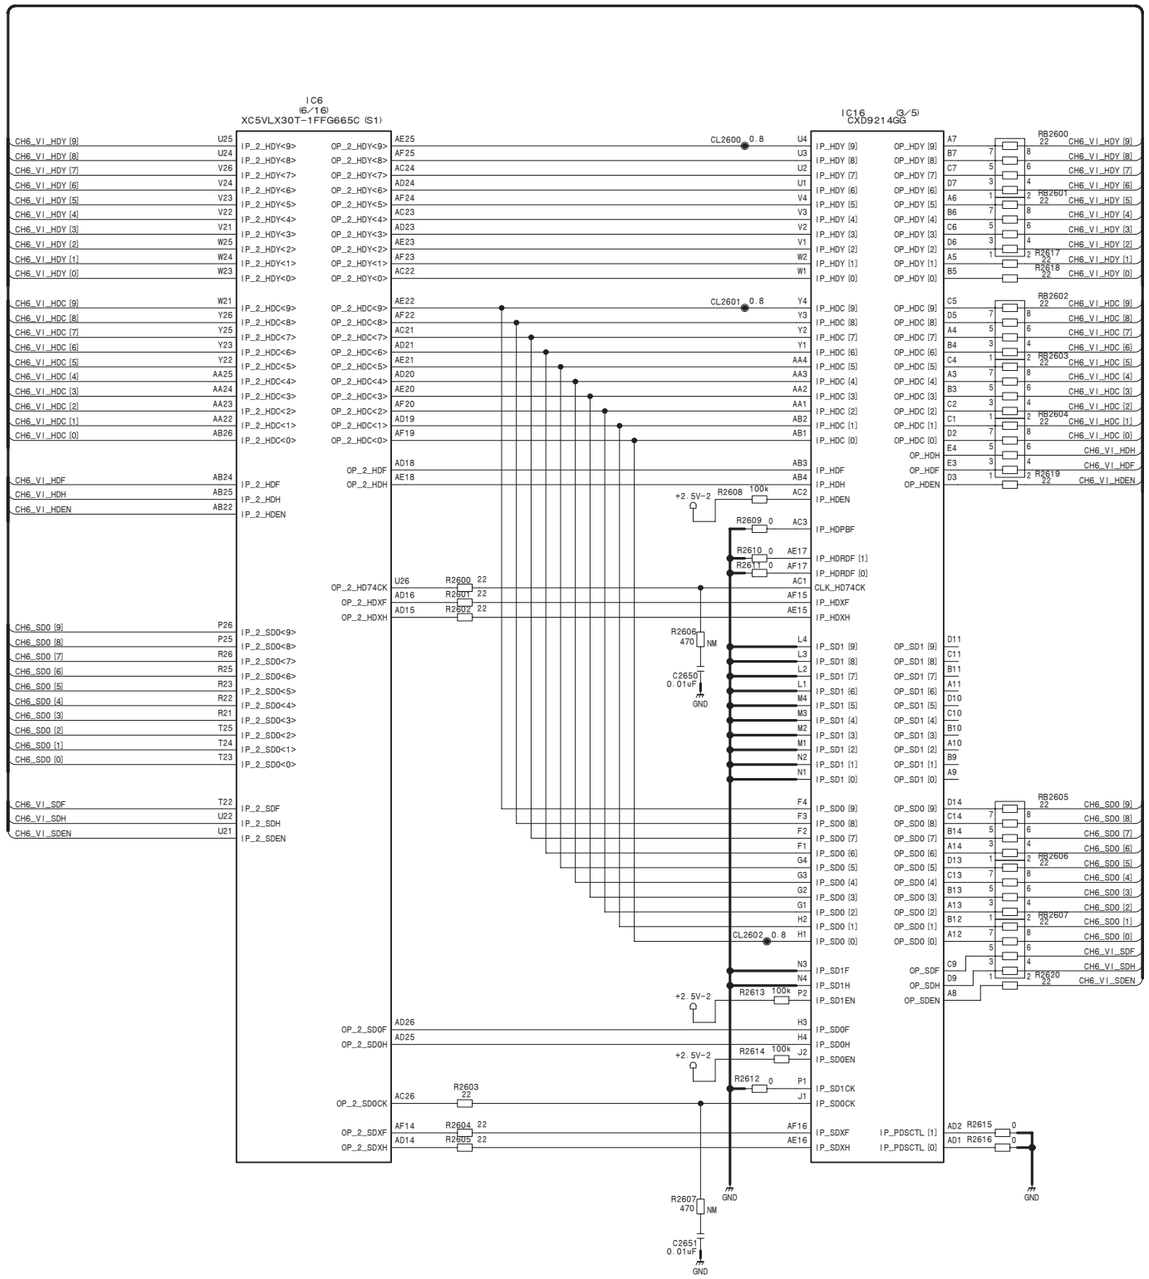

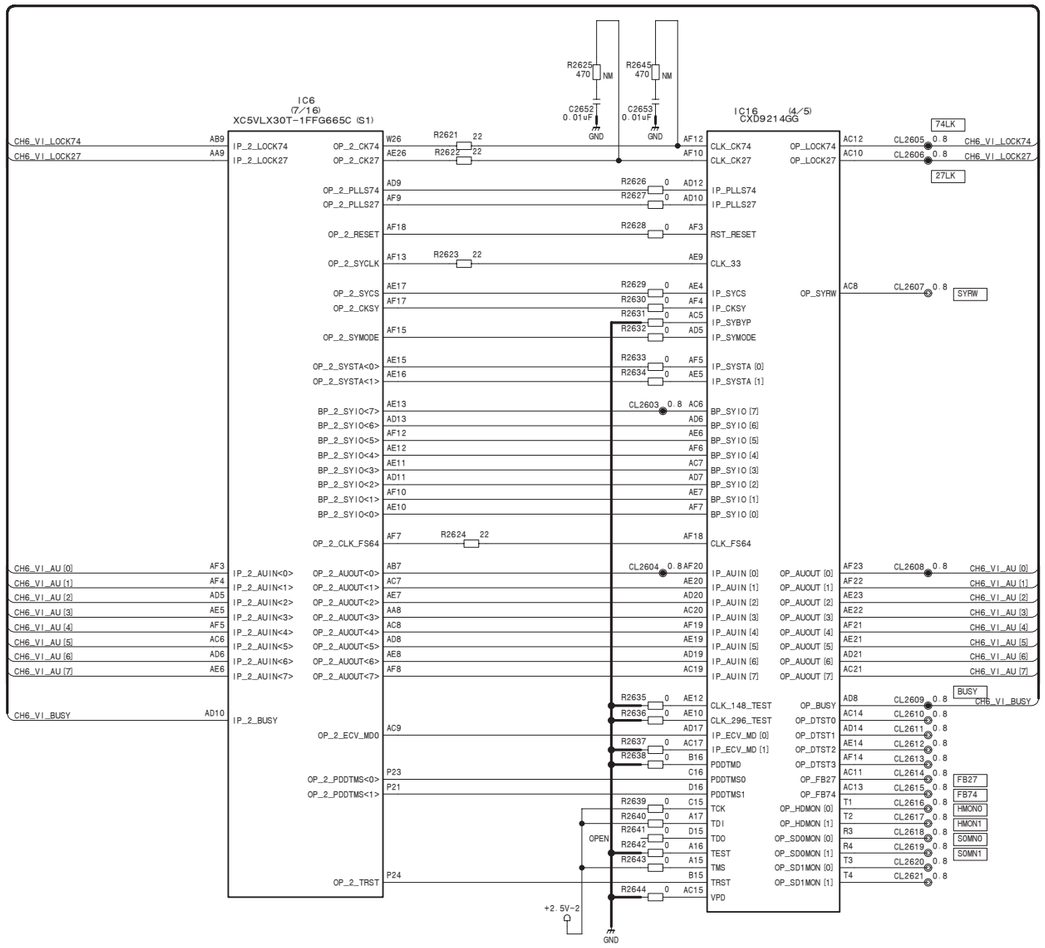

FC (CH6)

FC-112 (26/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_26

FC-112 (27/40)
SUFFIX: -12

Virtual Module

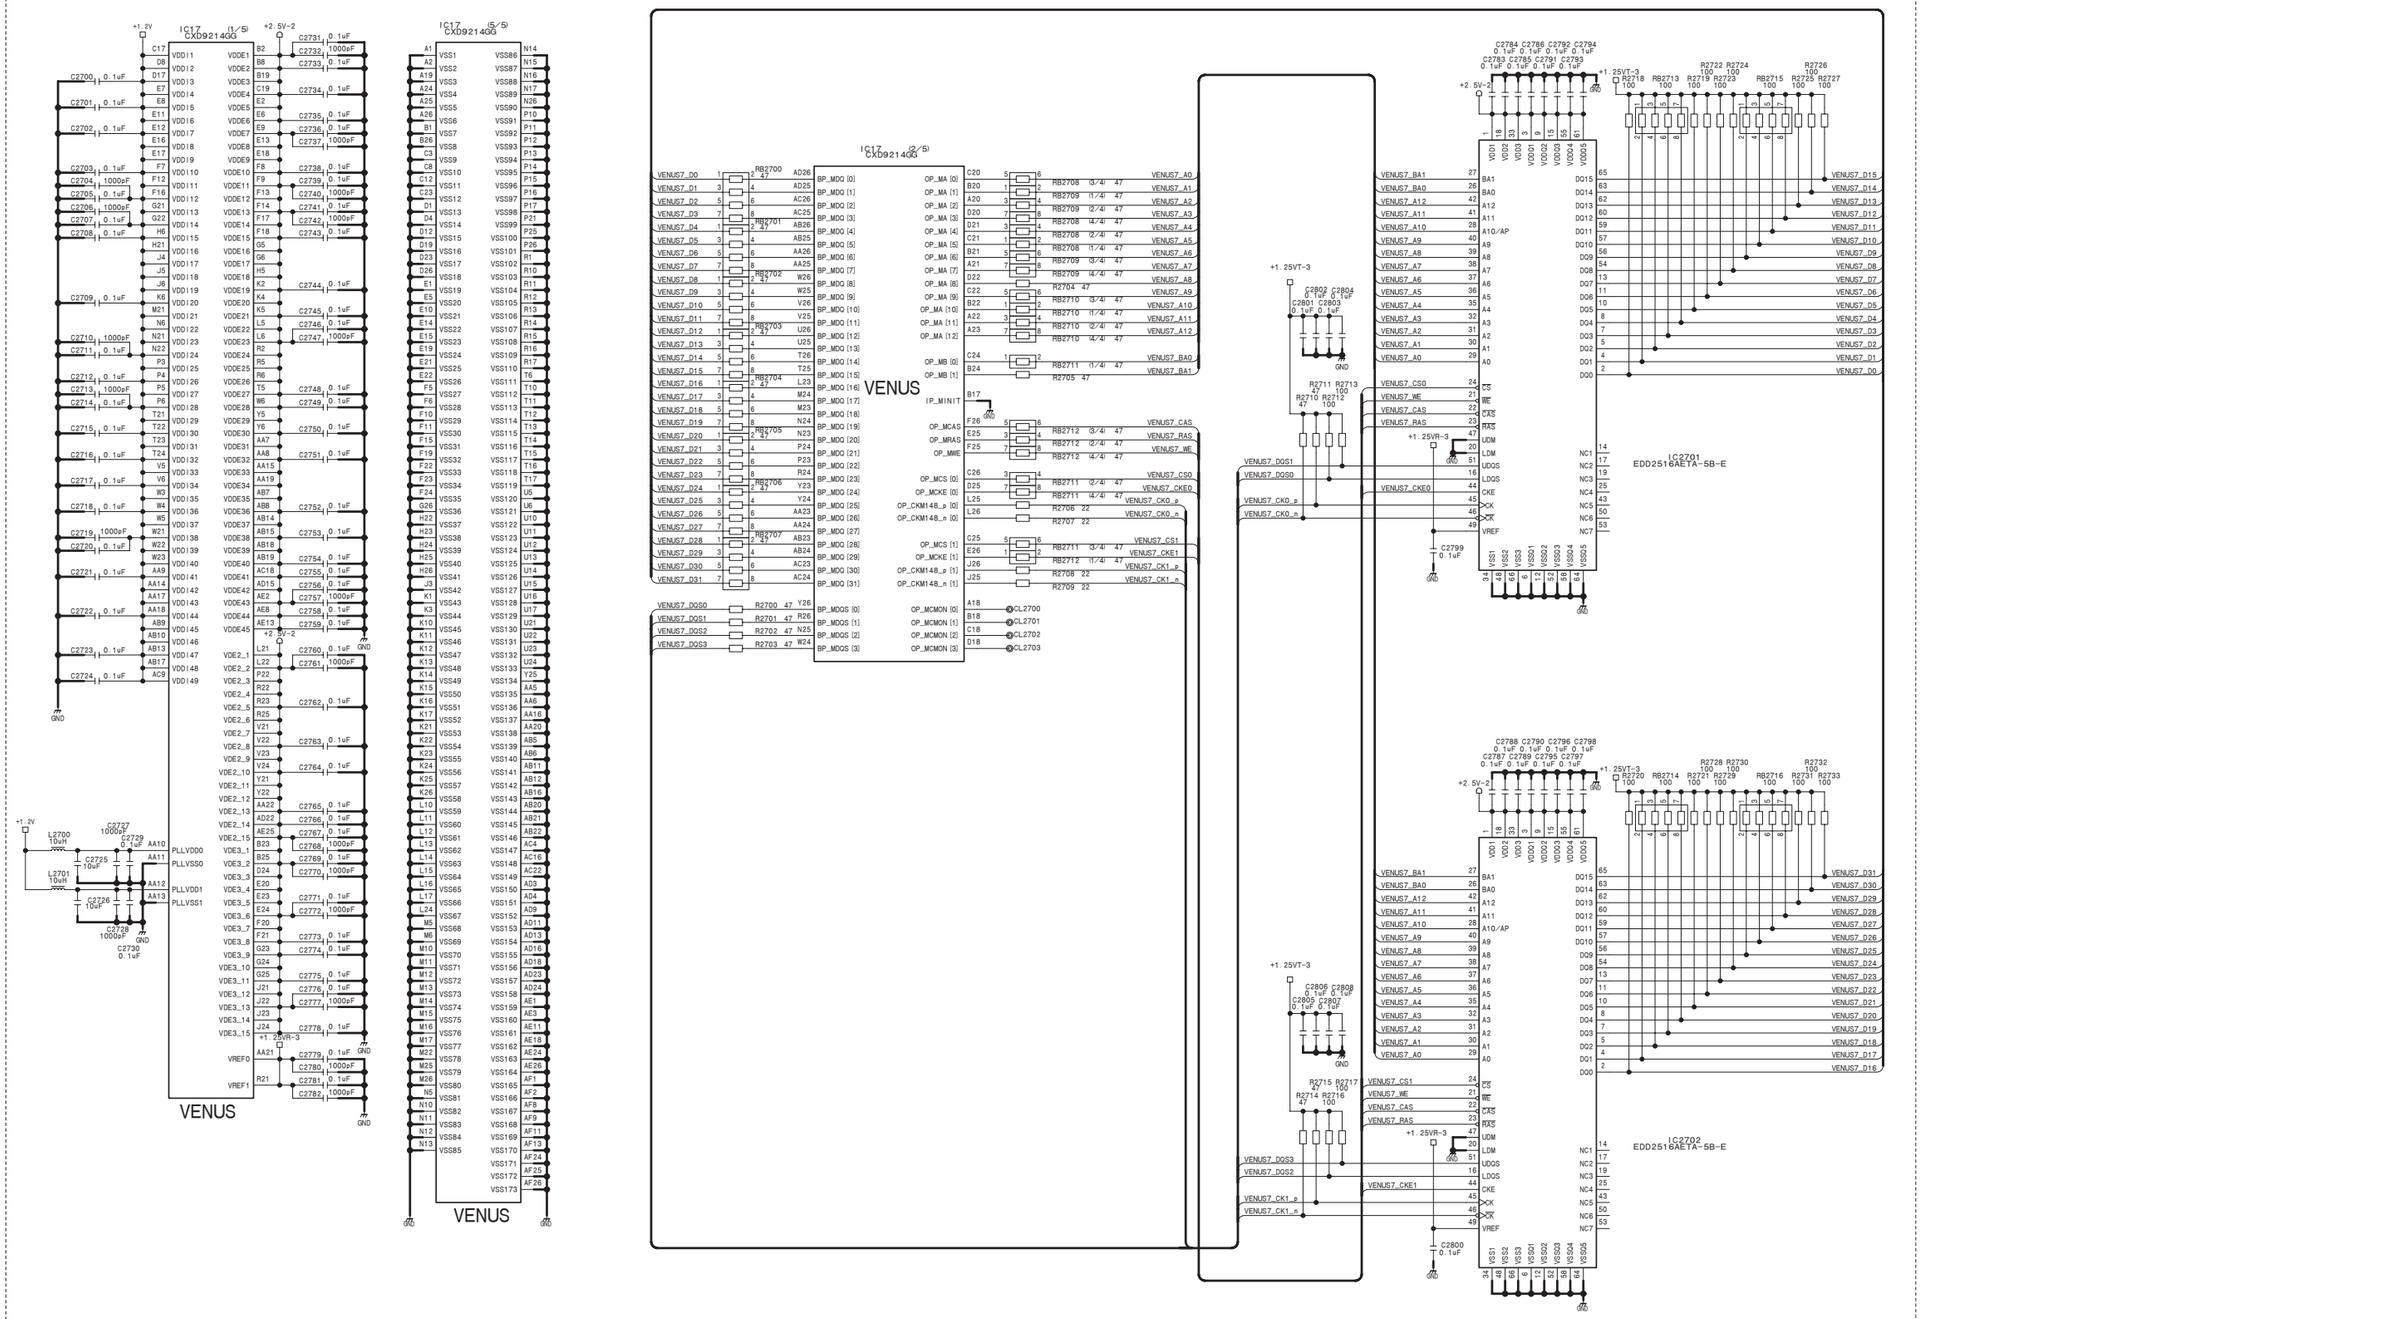

FC MEM (CH7)

FC-112 (27/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_27

FC-112 (28/40)
SUFFIX: -12

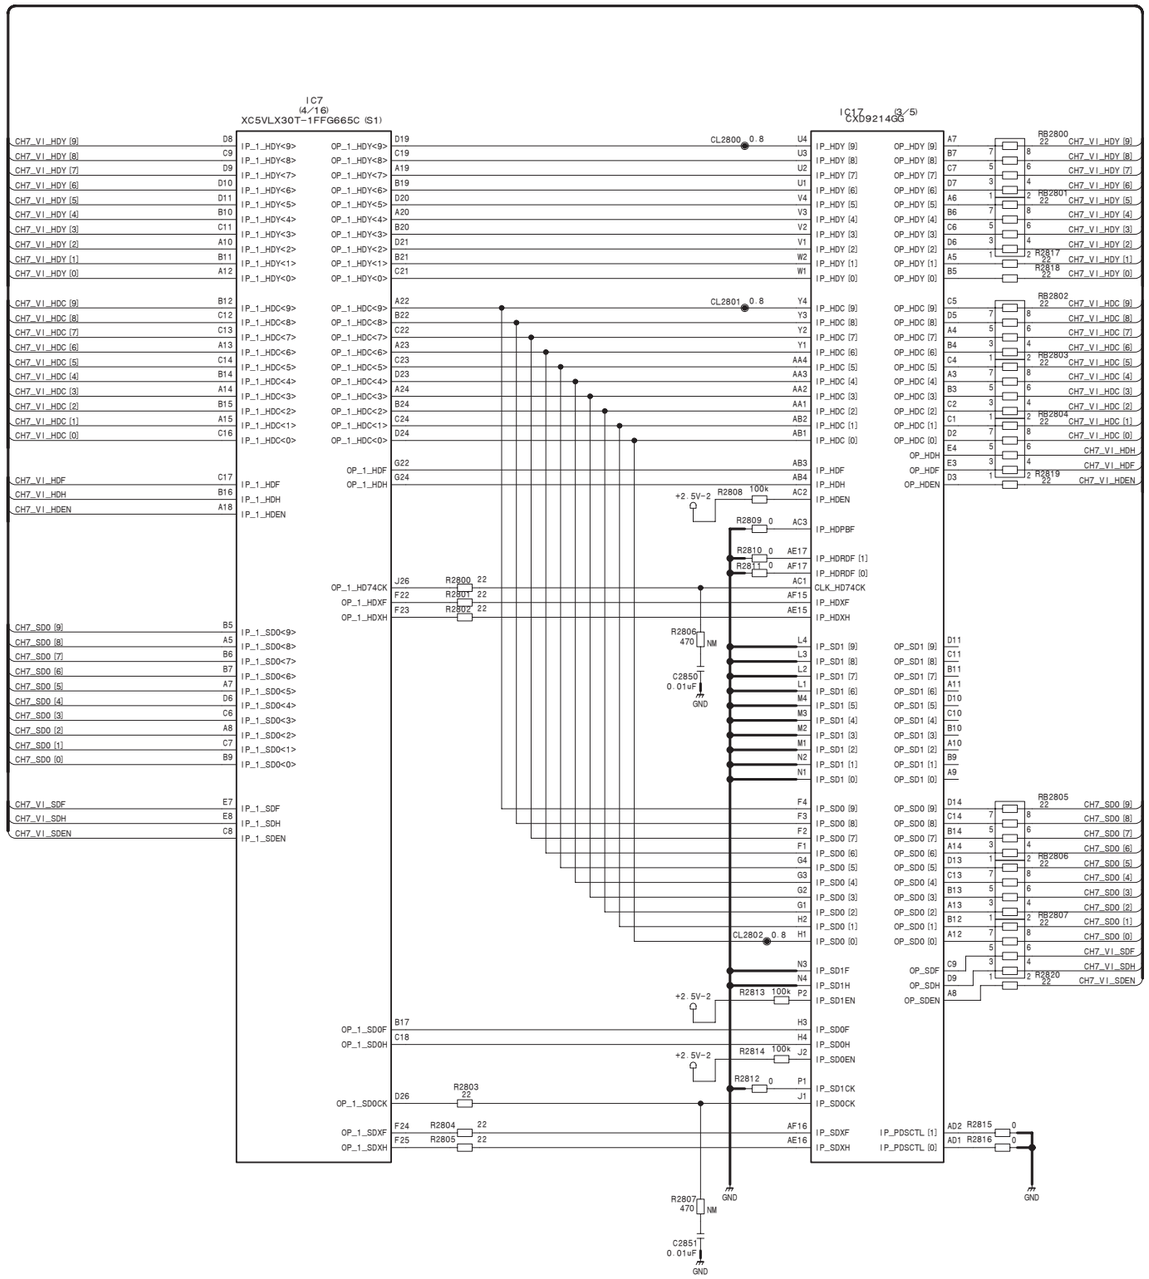

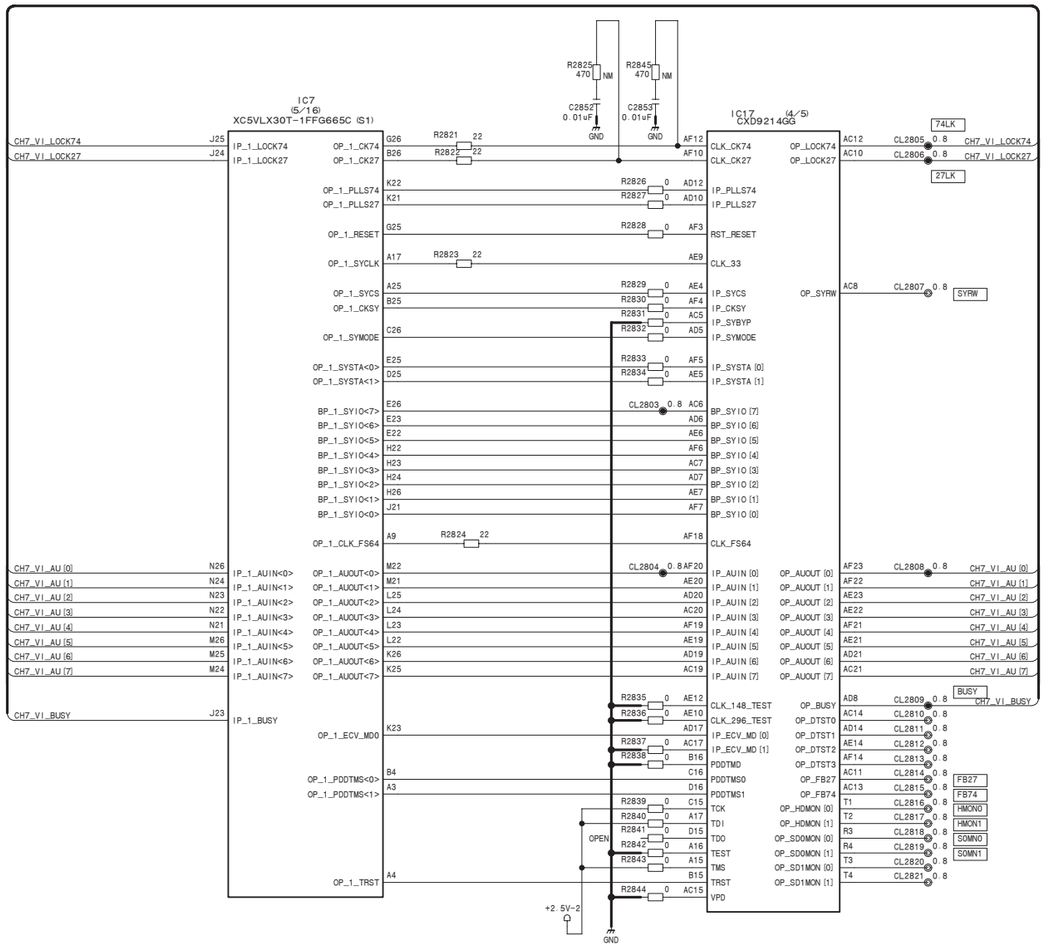

FC (CH7)

FC-112 (28/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_28

Virtual Module

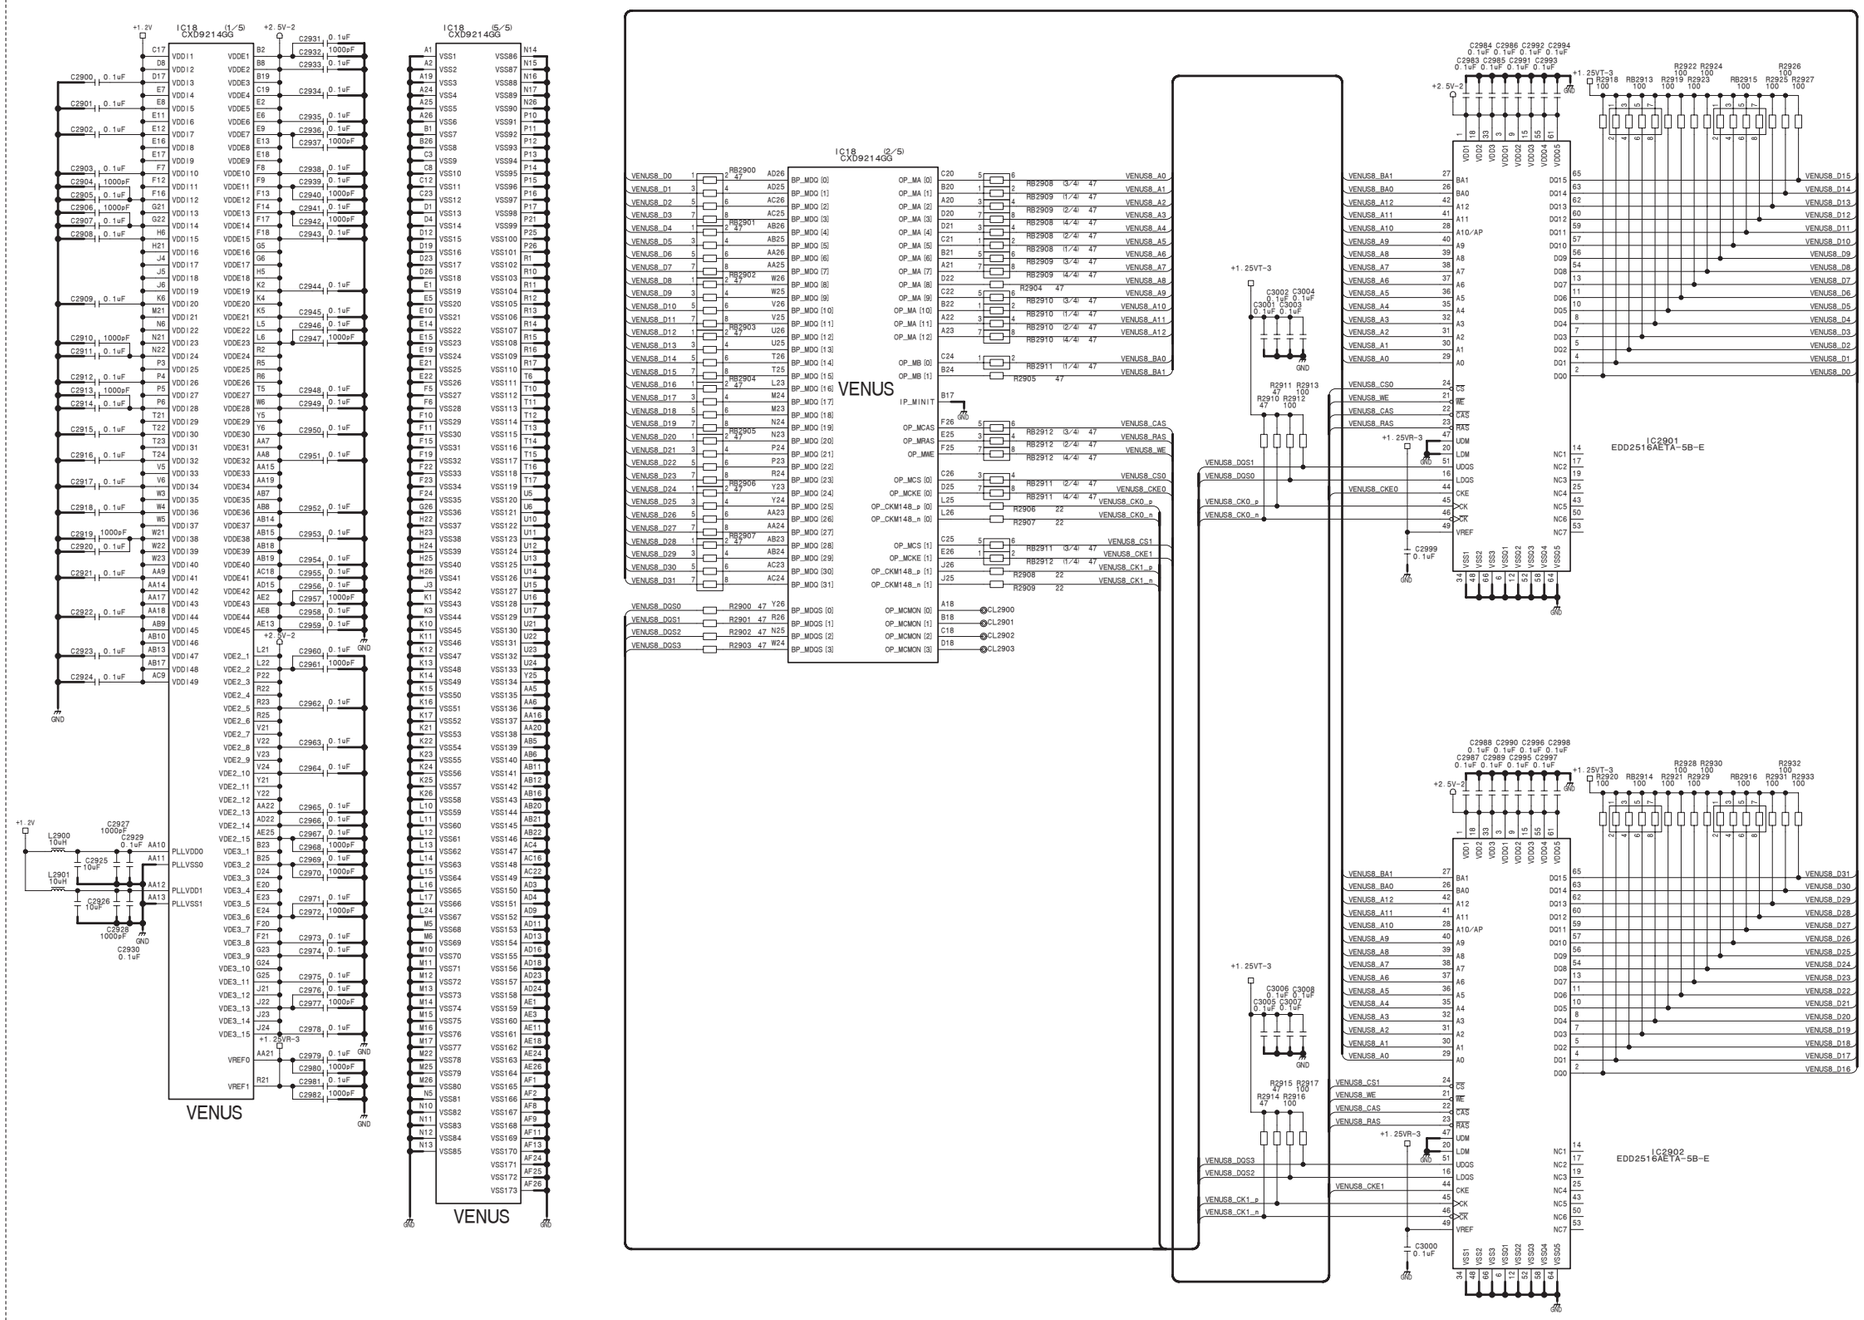

FC MEM (CH8)

FC-112 (29/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_29

FC-112 (30/40)
SUFFIX: -12

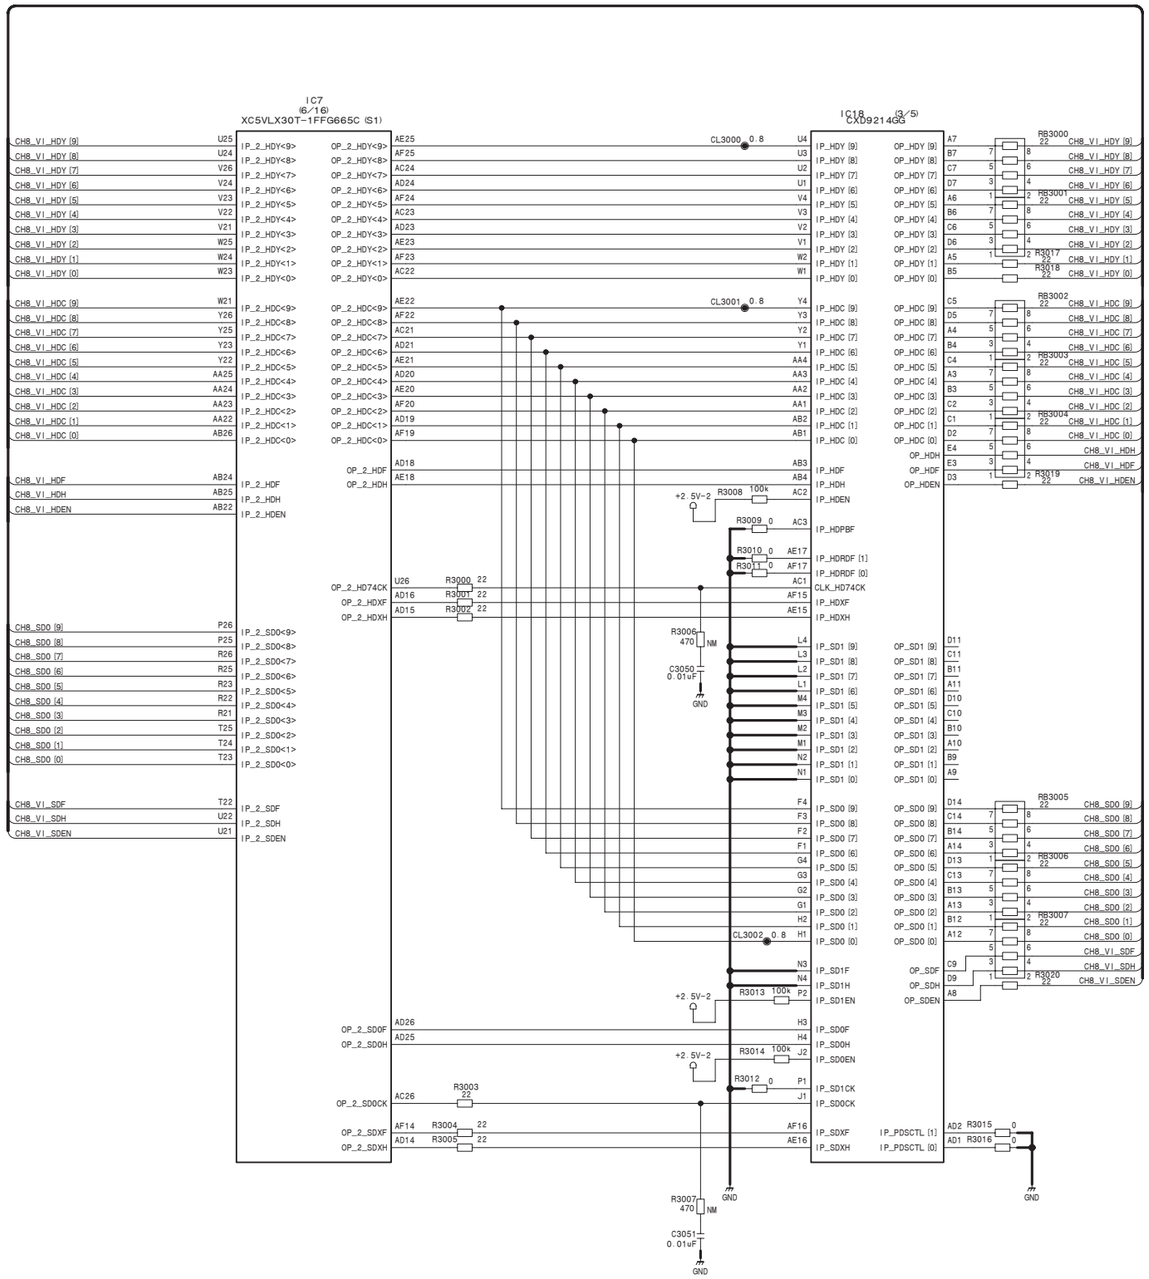

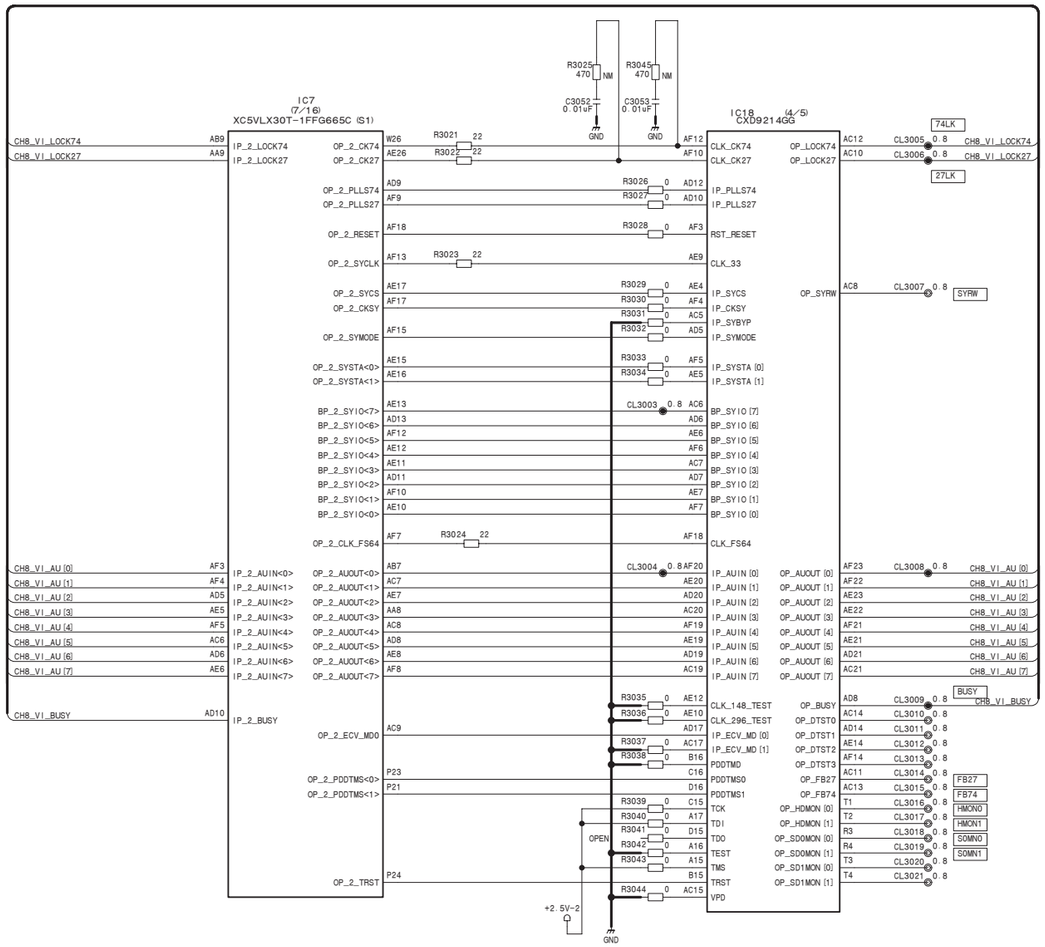

FC (CH8)

FC-112 (30/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_30

FC-112 (31/40)
SUFFIX: -12

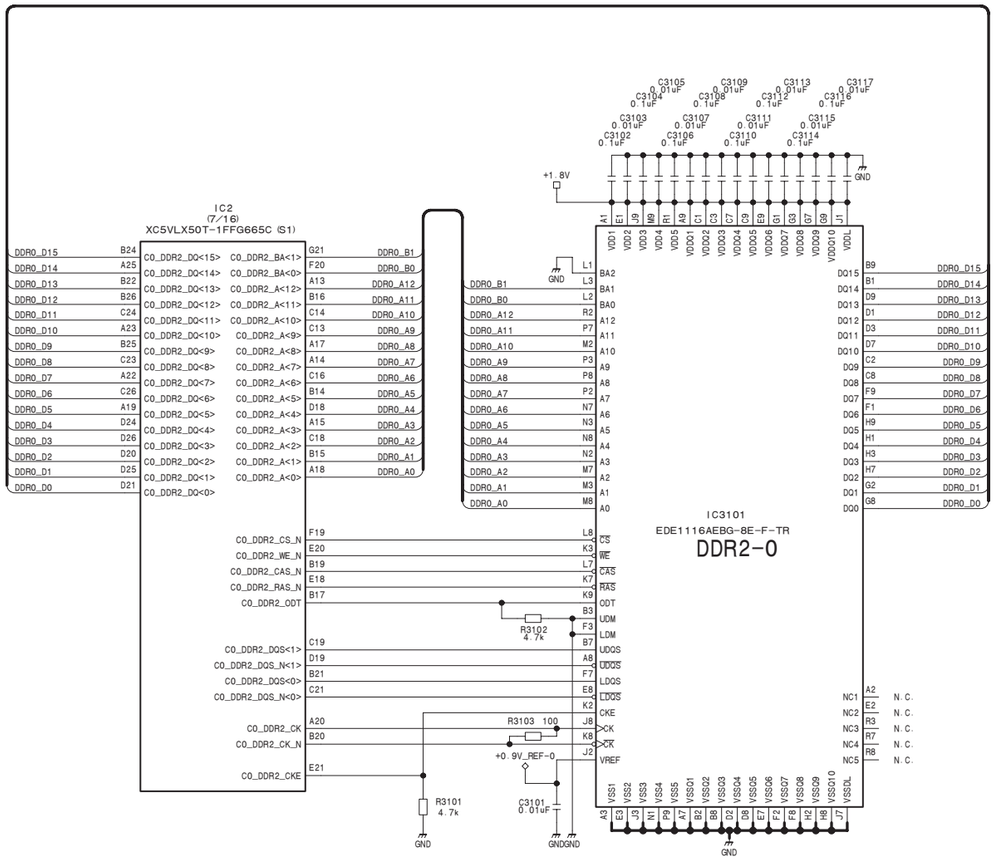

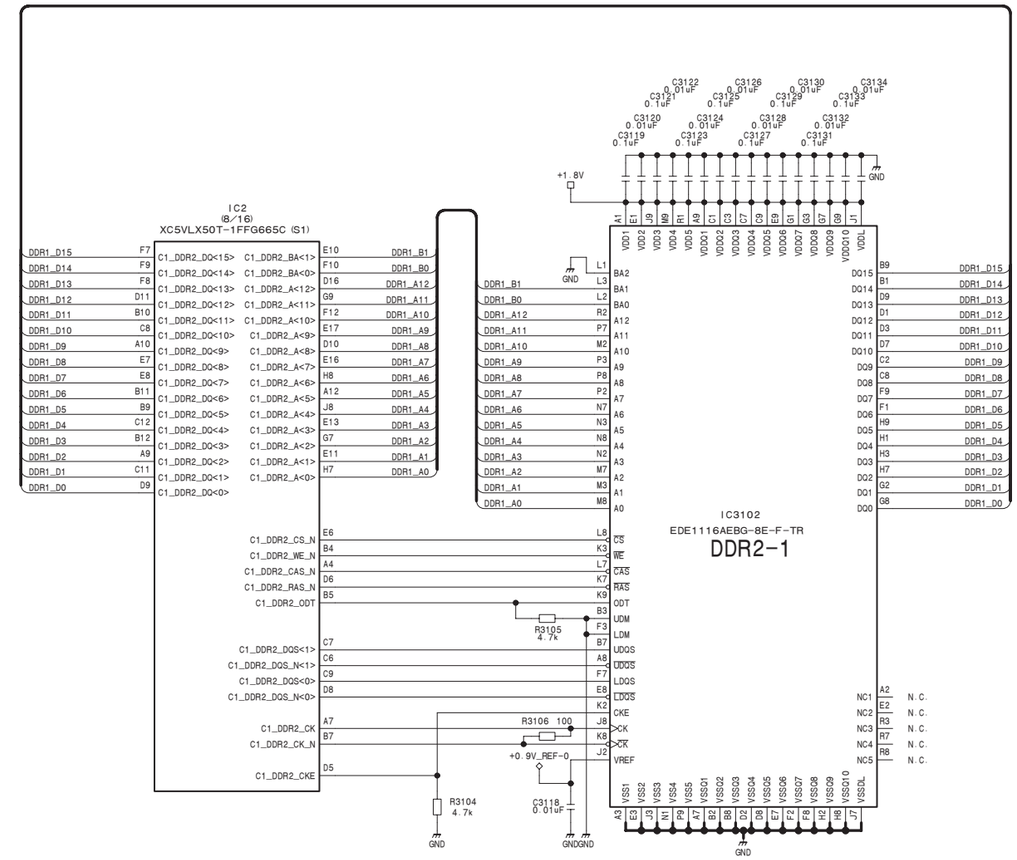

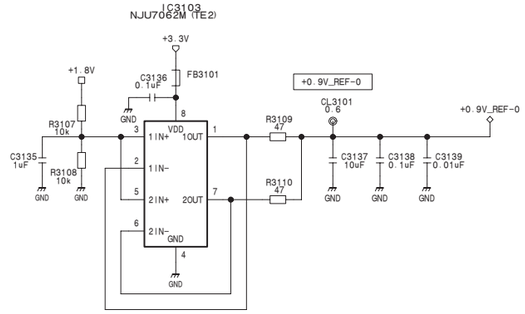

FS DDR2 MEM (1/4)

FC-112 (31/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_31

FC-112 (32/40)
SUFFIX: -12

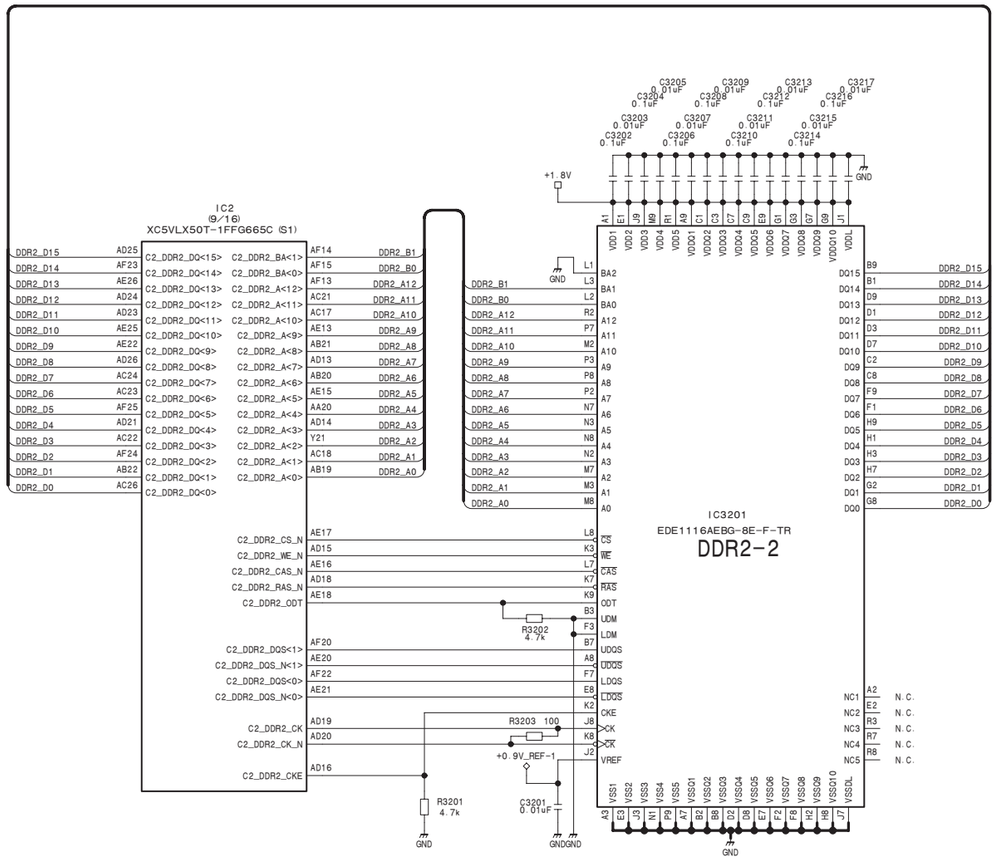

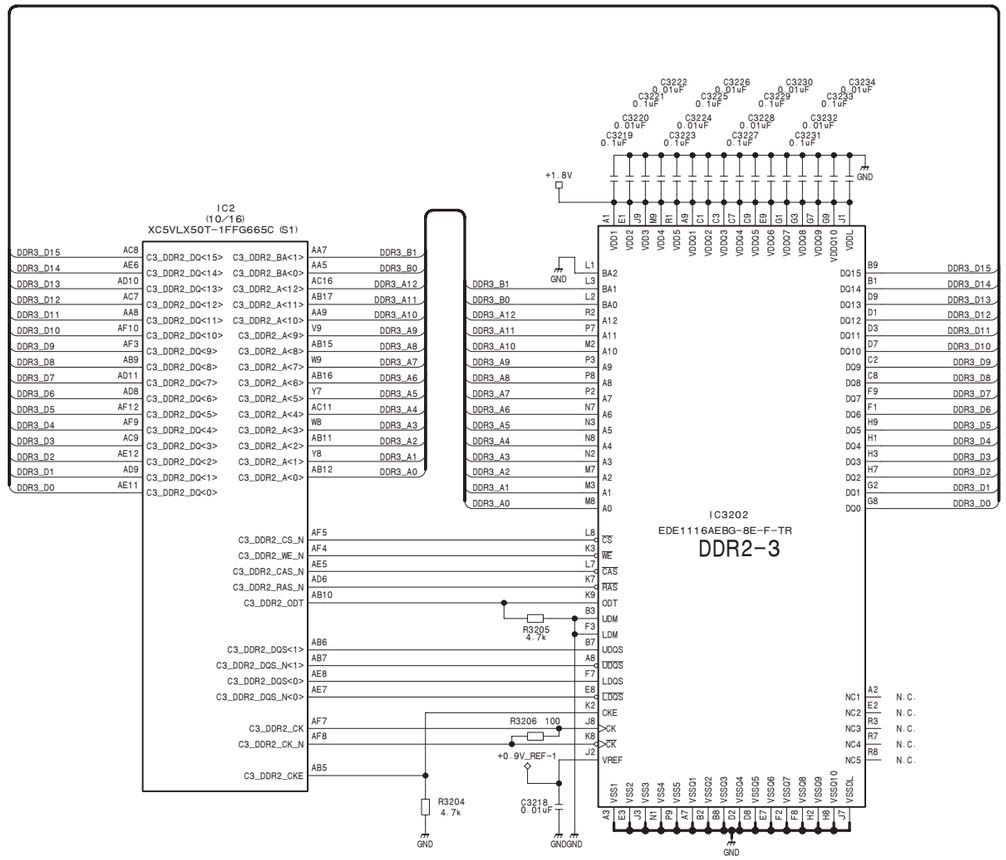

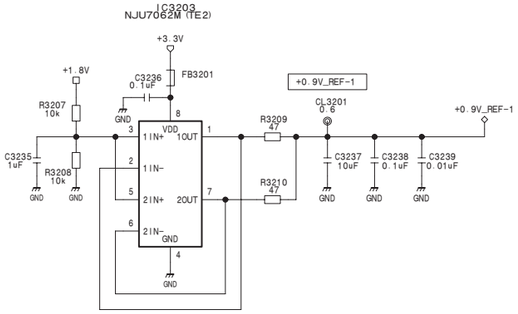

FS DDR2 MEM (2/4)

FC-112 (32/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_32

FC-112 (33/40)
SUFFIX: -12

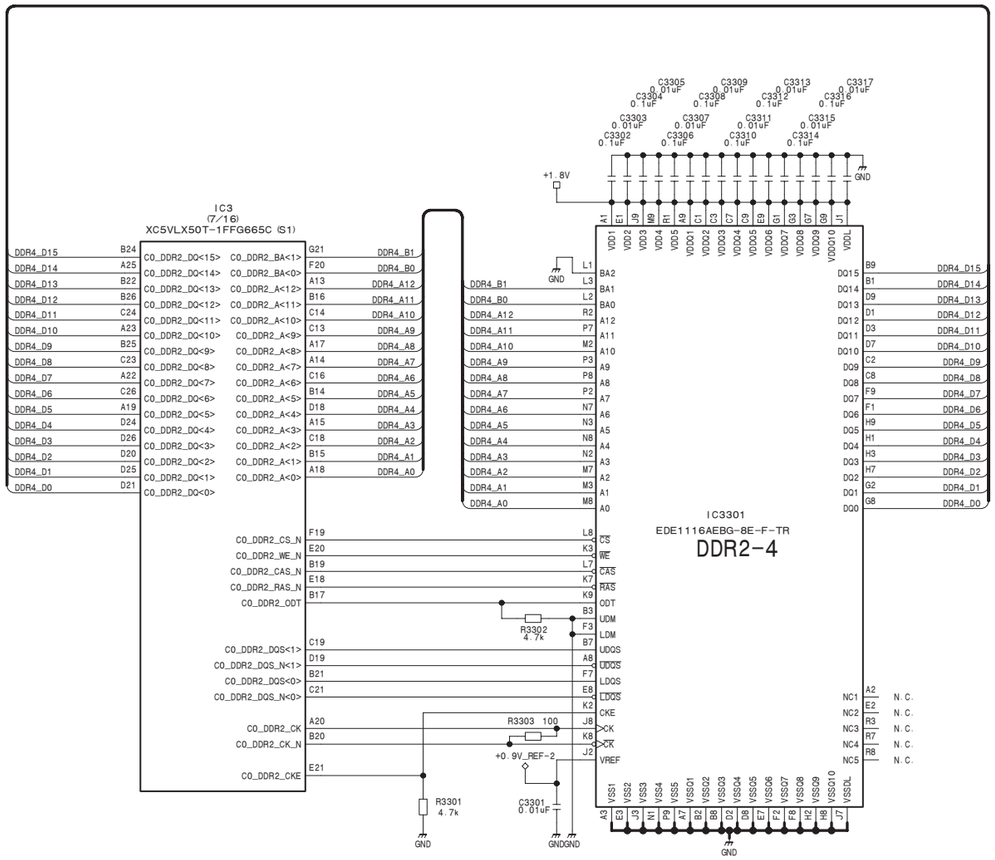

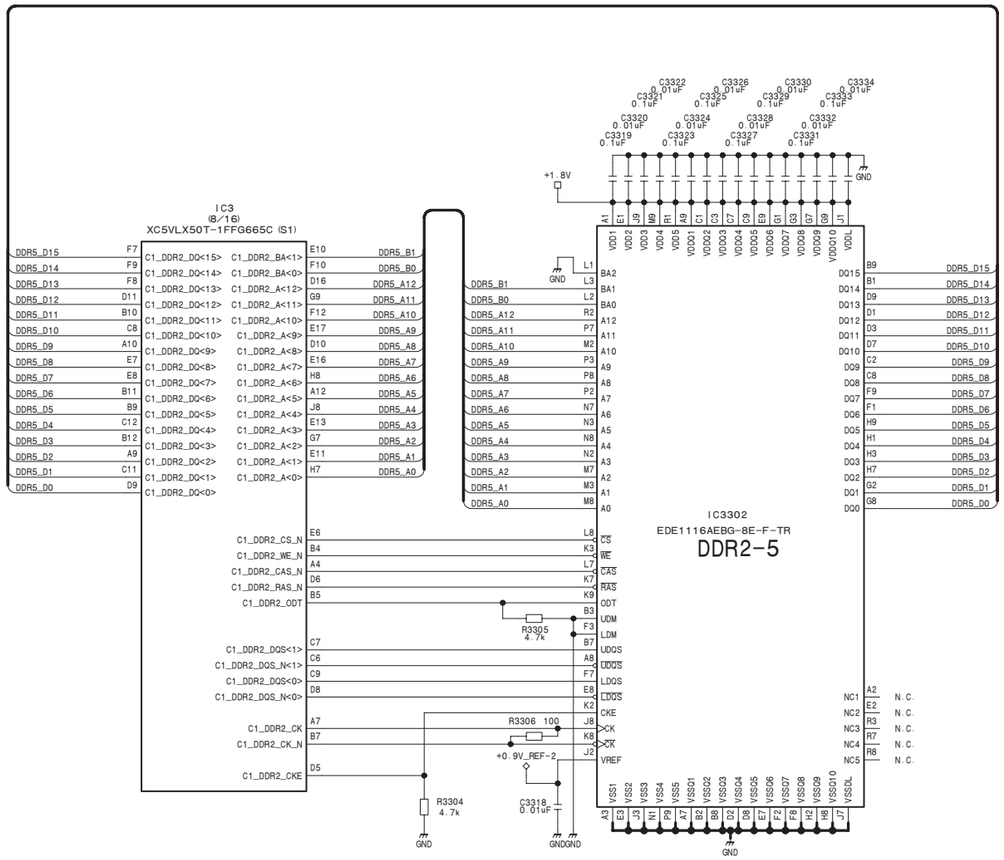

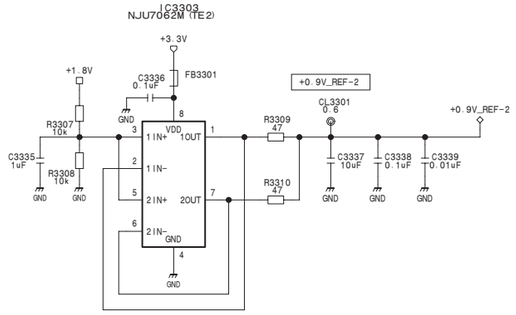

FS DDR2 MEM (3/4)

FC-112 (33/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_33

FC-112 (34/40)
SUFFIX: -12

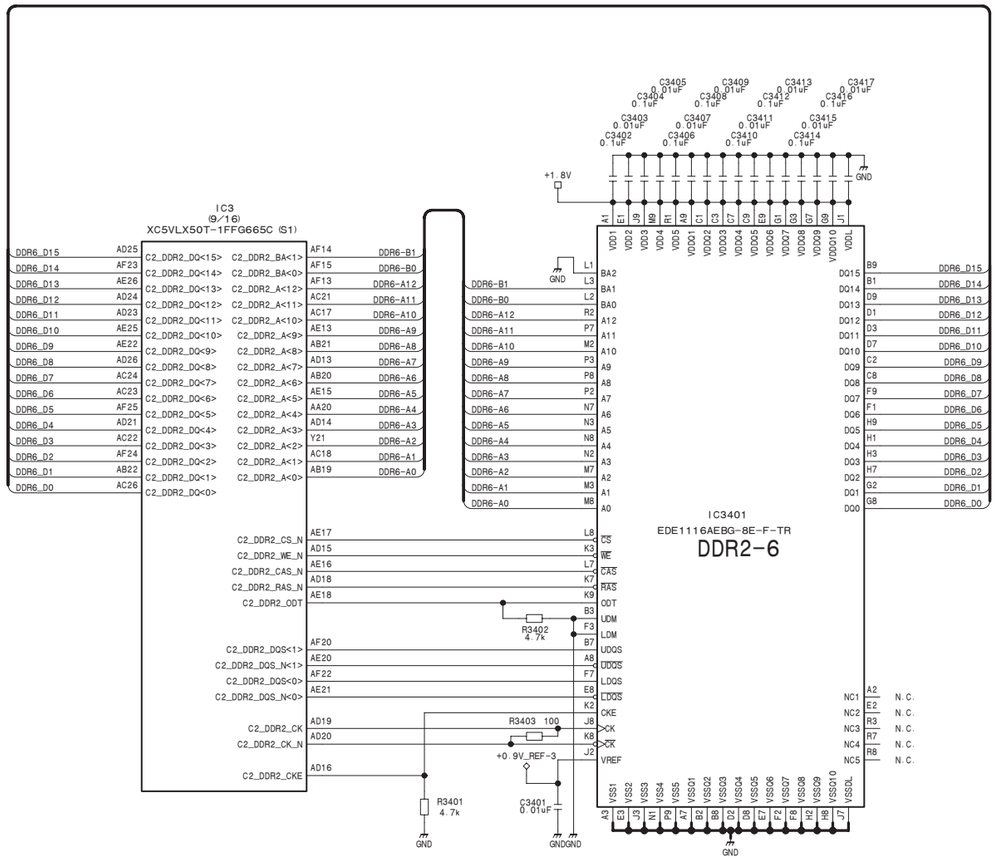

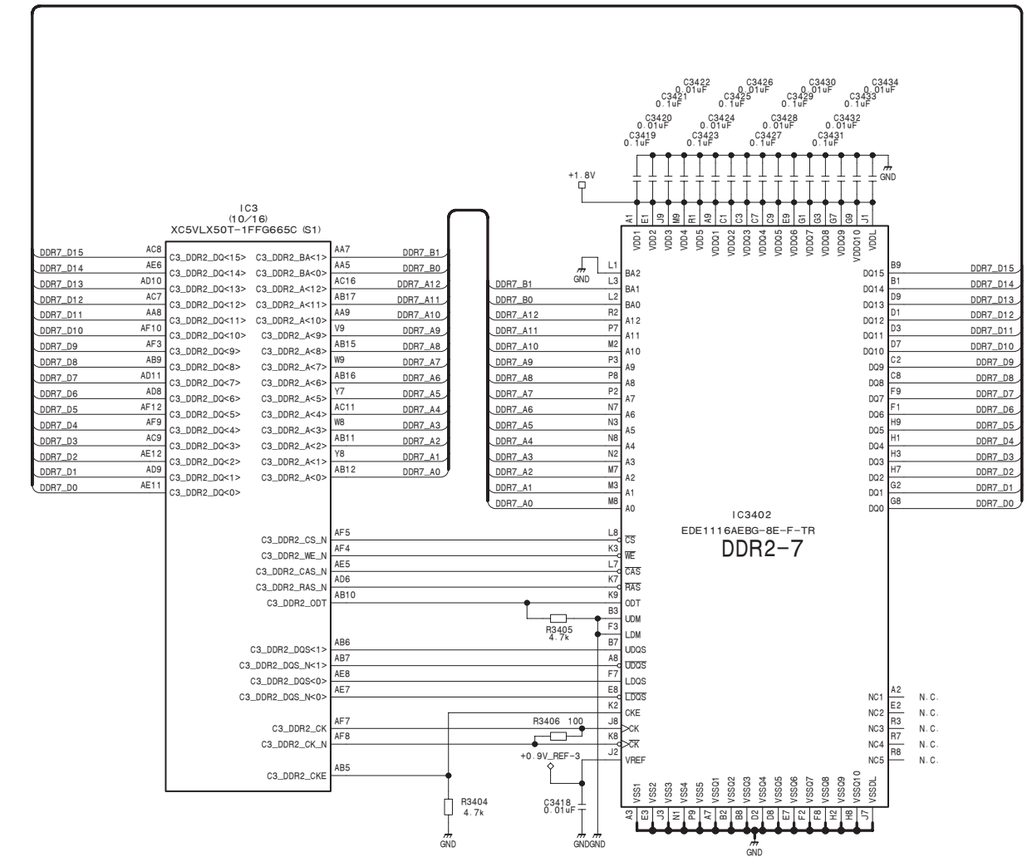

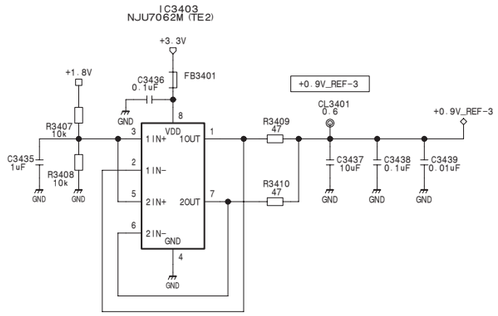

FS DDR2 MEM (4/4)

FC-112 (34/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_34

FC-112 (35/40)
SUFFIX: -12

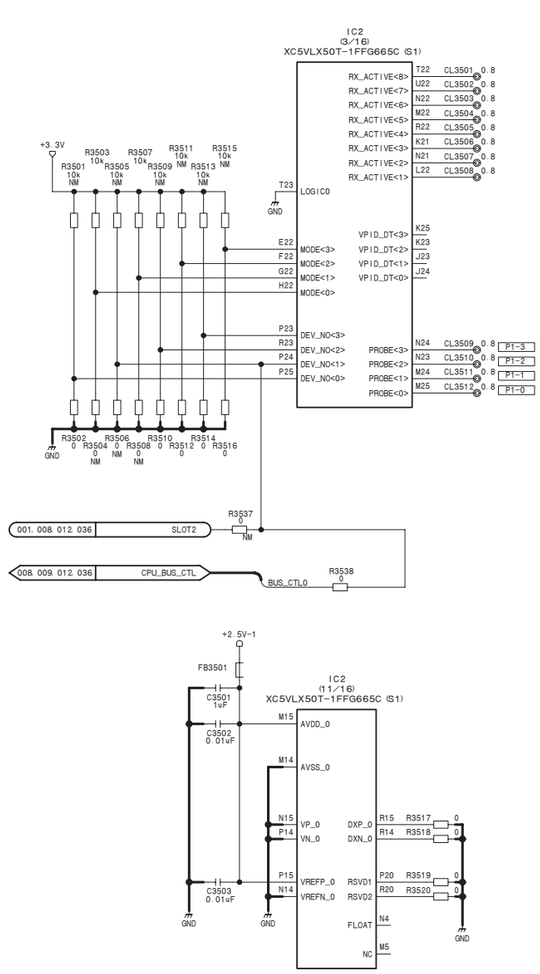

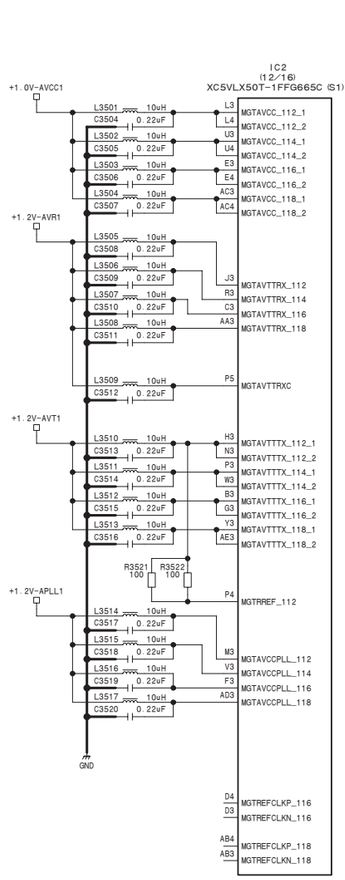

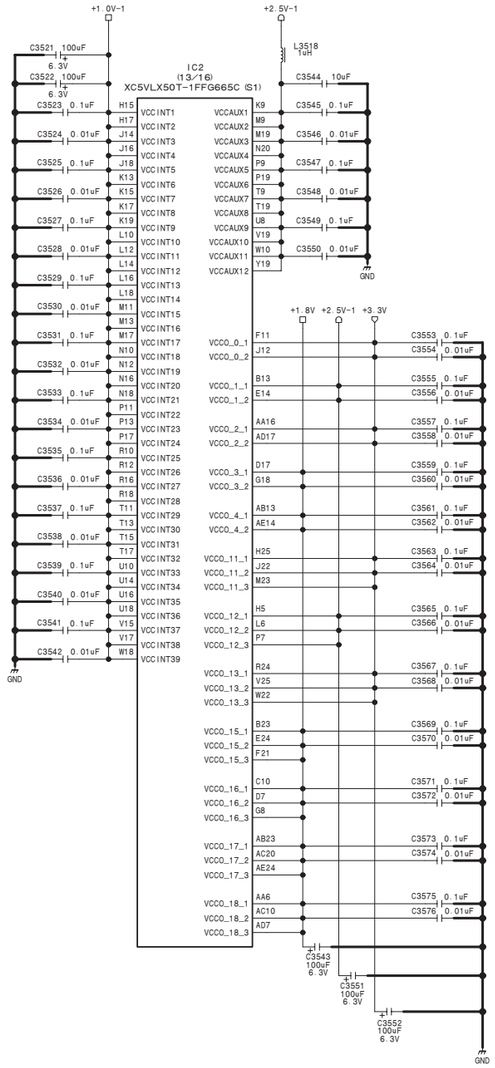

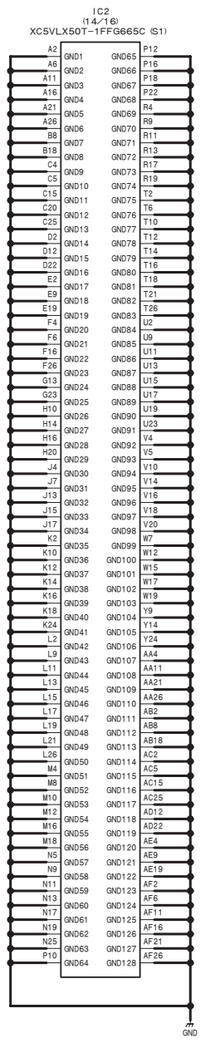

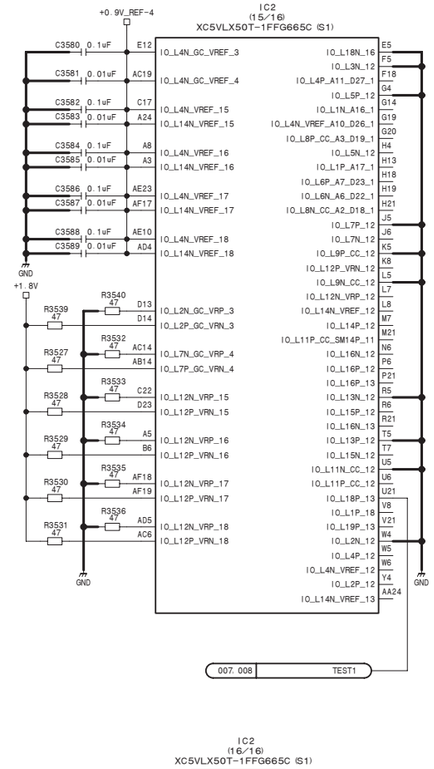

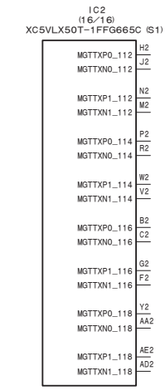

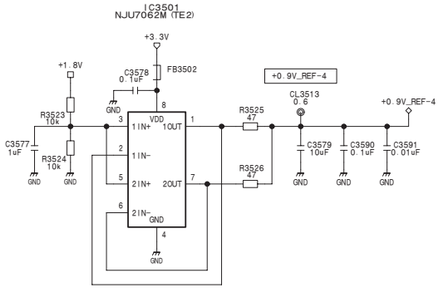

MFSDIX (IC2) VCC/GND

FC-112 (35/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_35

FC-112 (36/40)
SUFFIX: -12

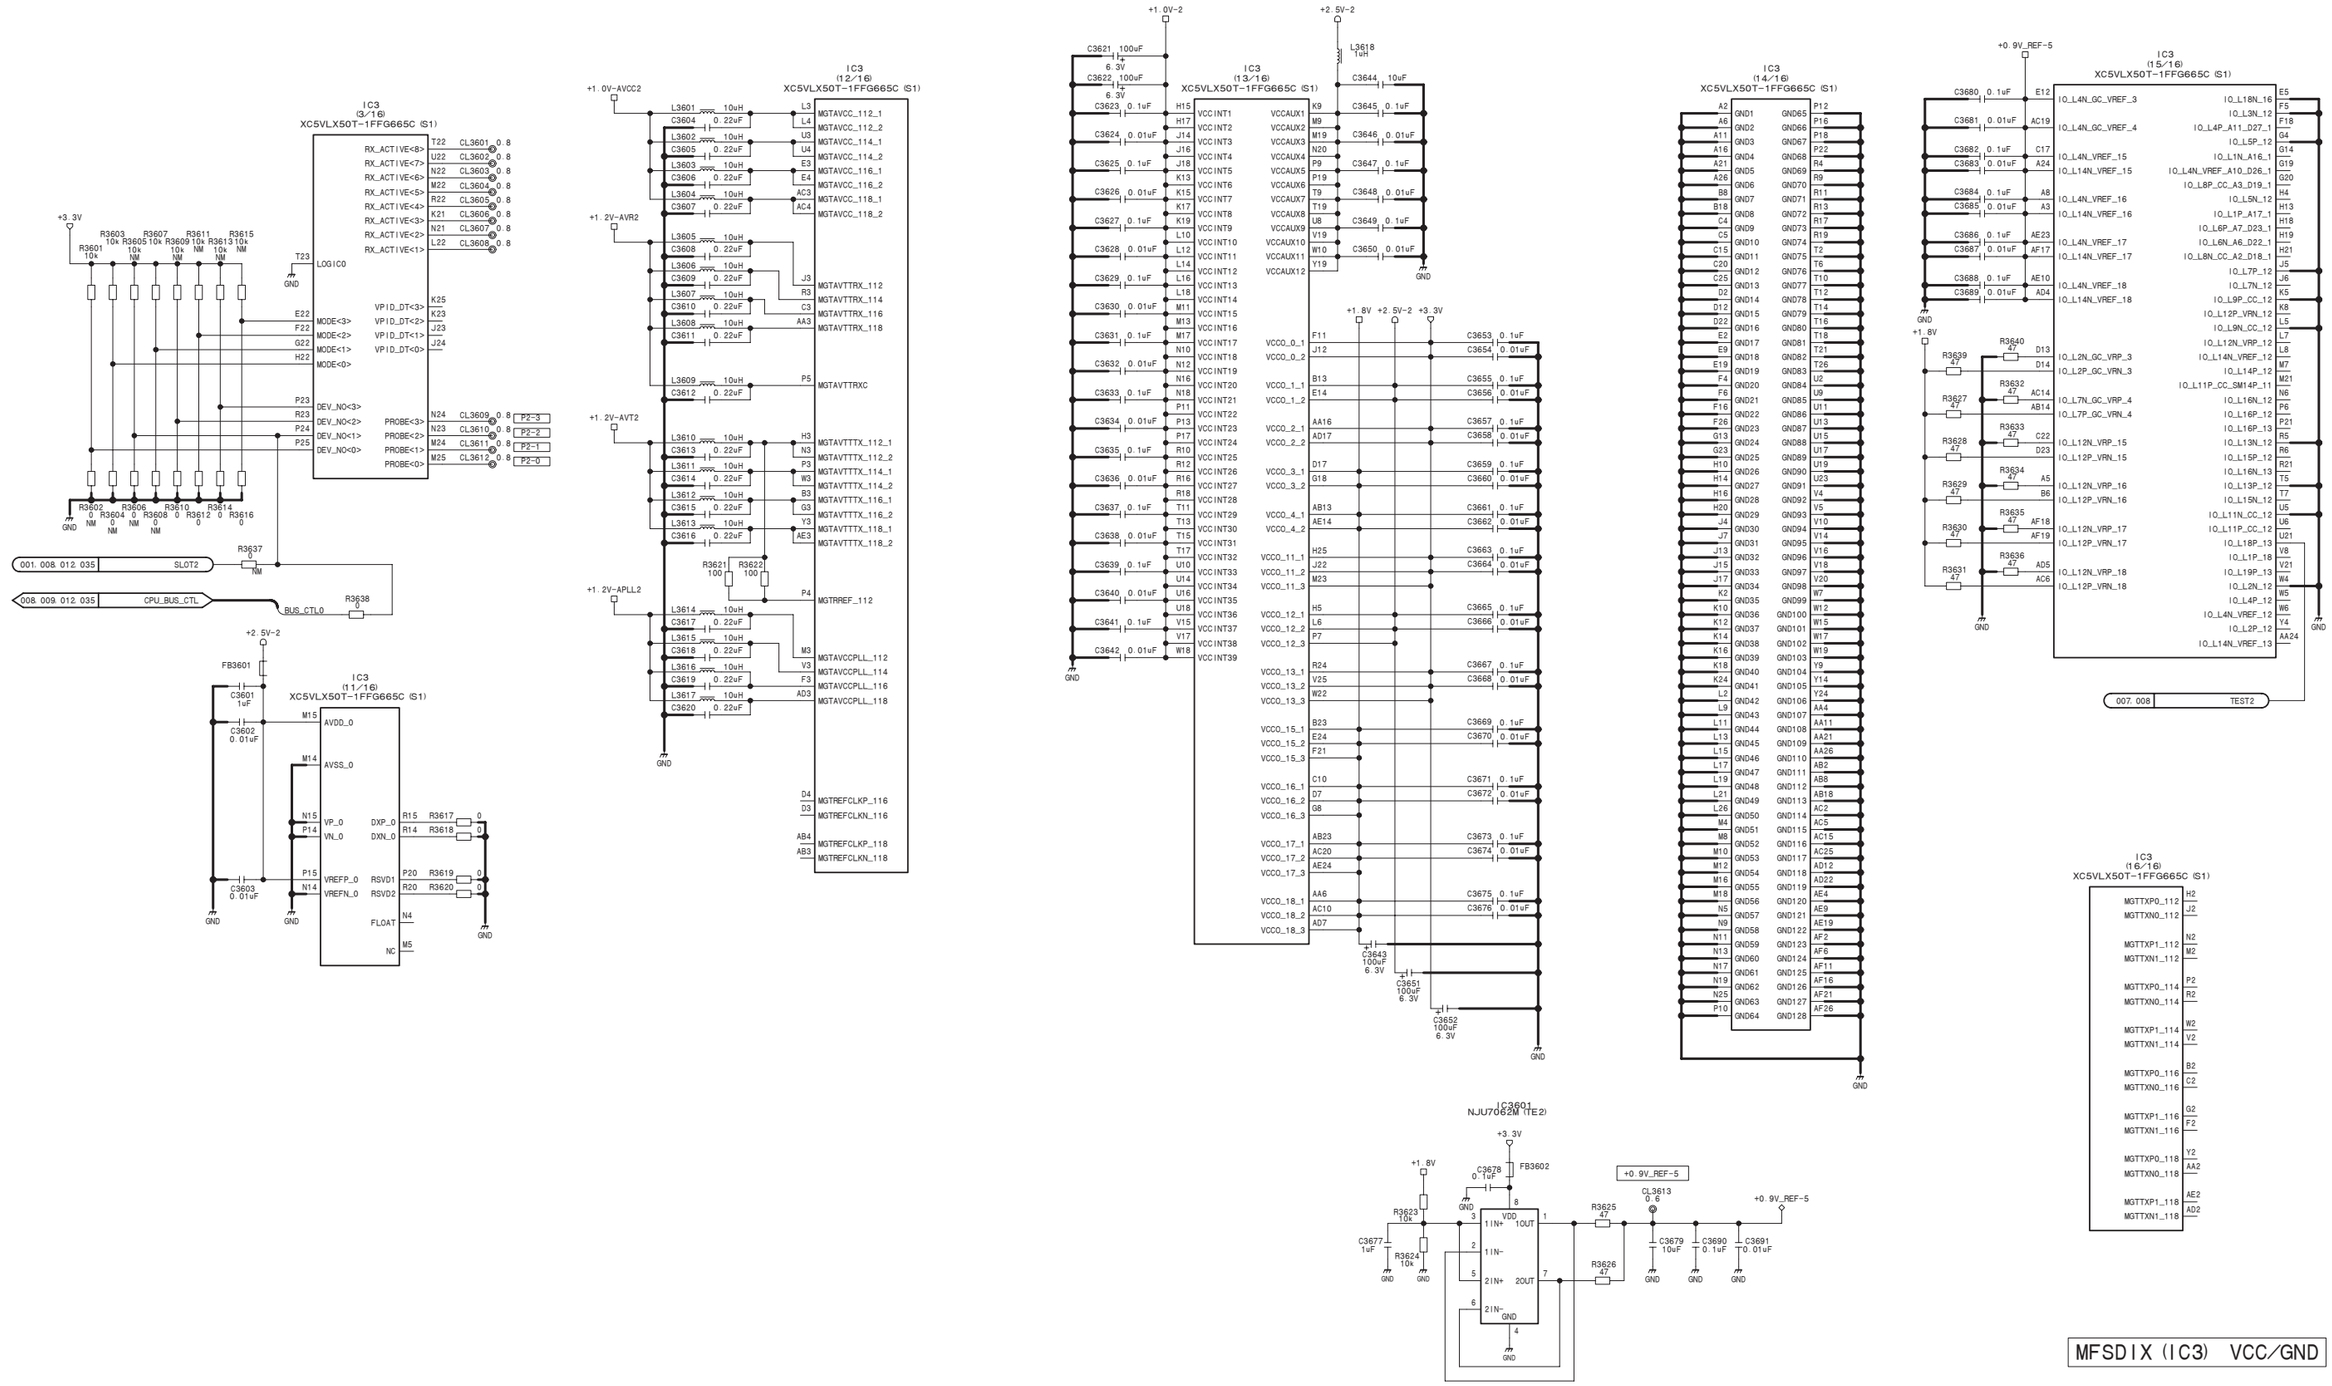

FC-112 (36/40)
BOARD NO. 1-879-579-12
MVS-8000X_FC-112_012_36

FC-112 (37/40)
SUFFIX: -12

FCIFX (IC4) VCC/GND

FC-112 (37/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_37

FC-112 (38/40) SUFFIX: -12



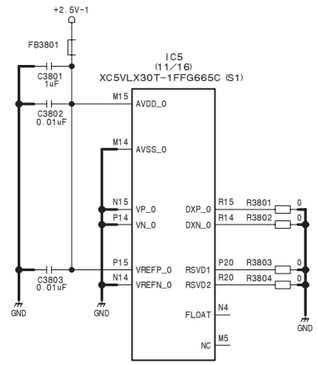

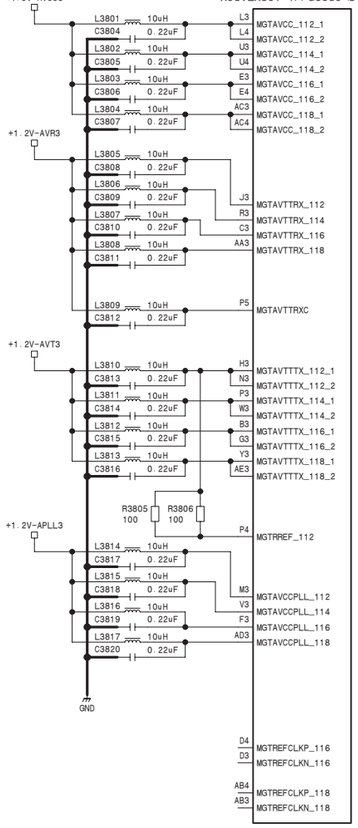

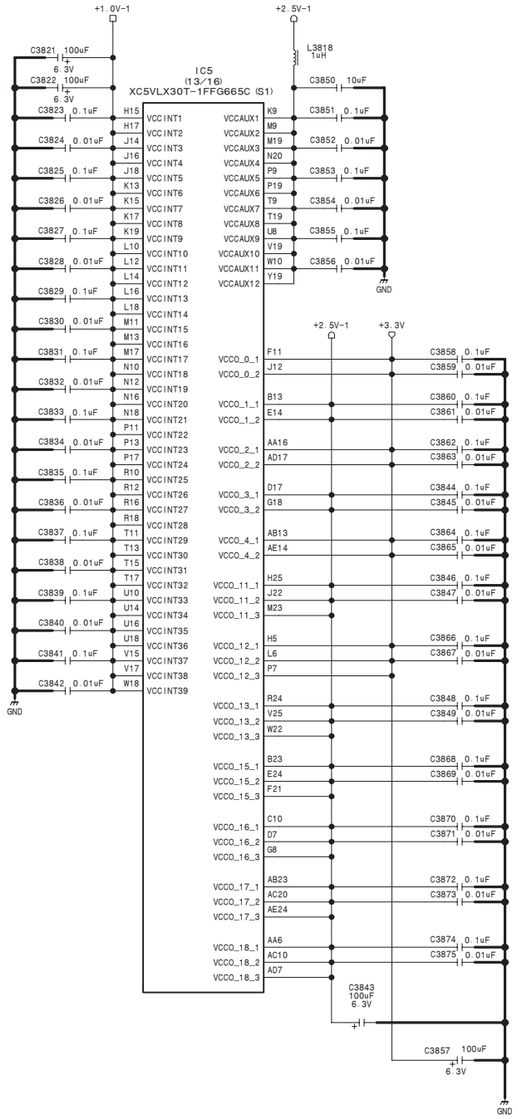

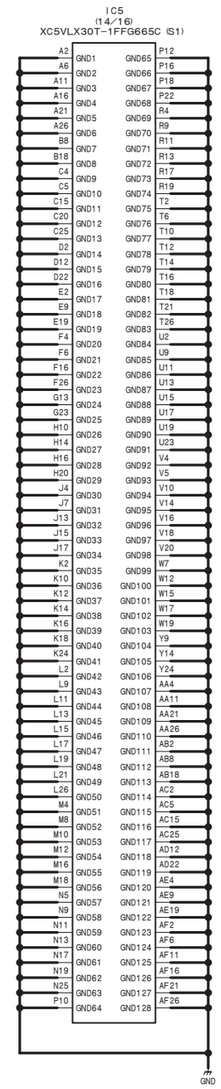

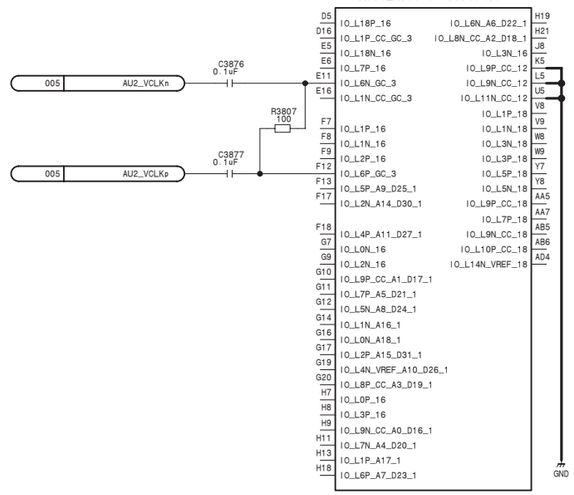

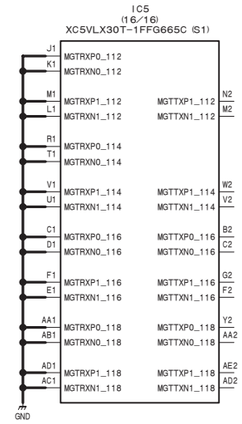

FC IFX (IC5) VCC/GND

FC-112 (38/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_38

FC-112 (39/40)
SUFFIX: -12

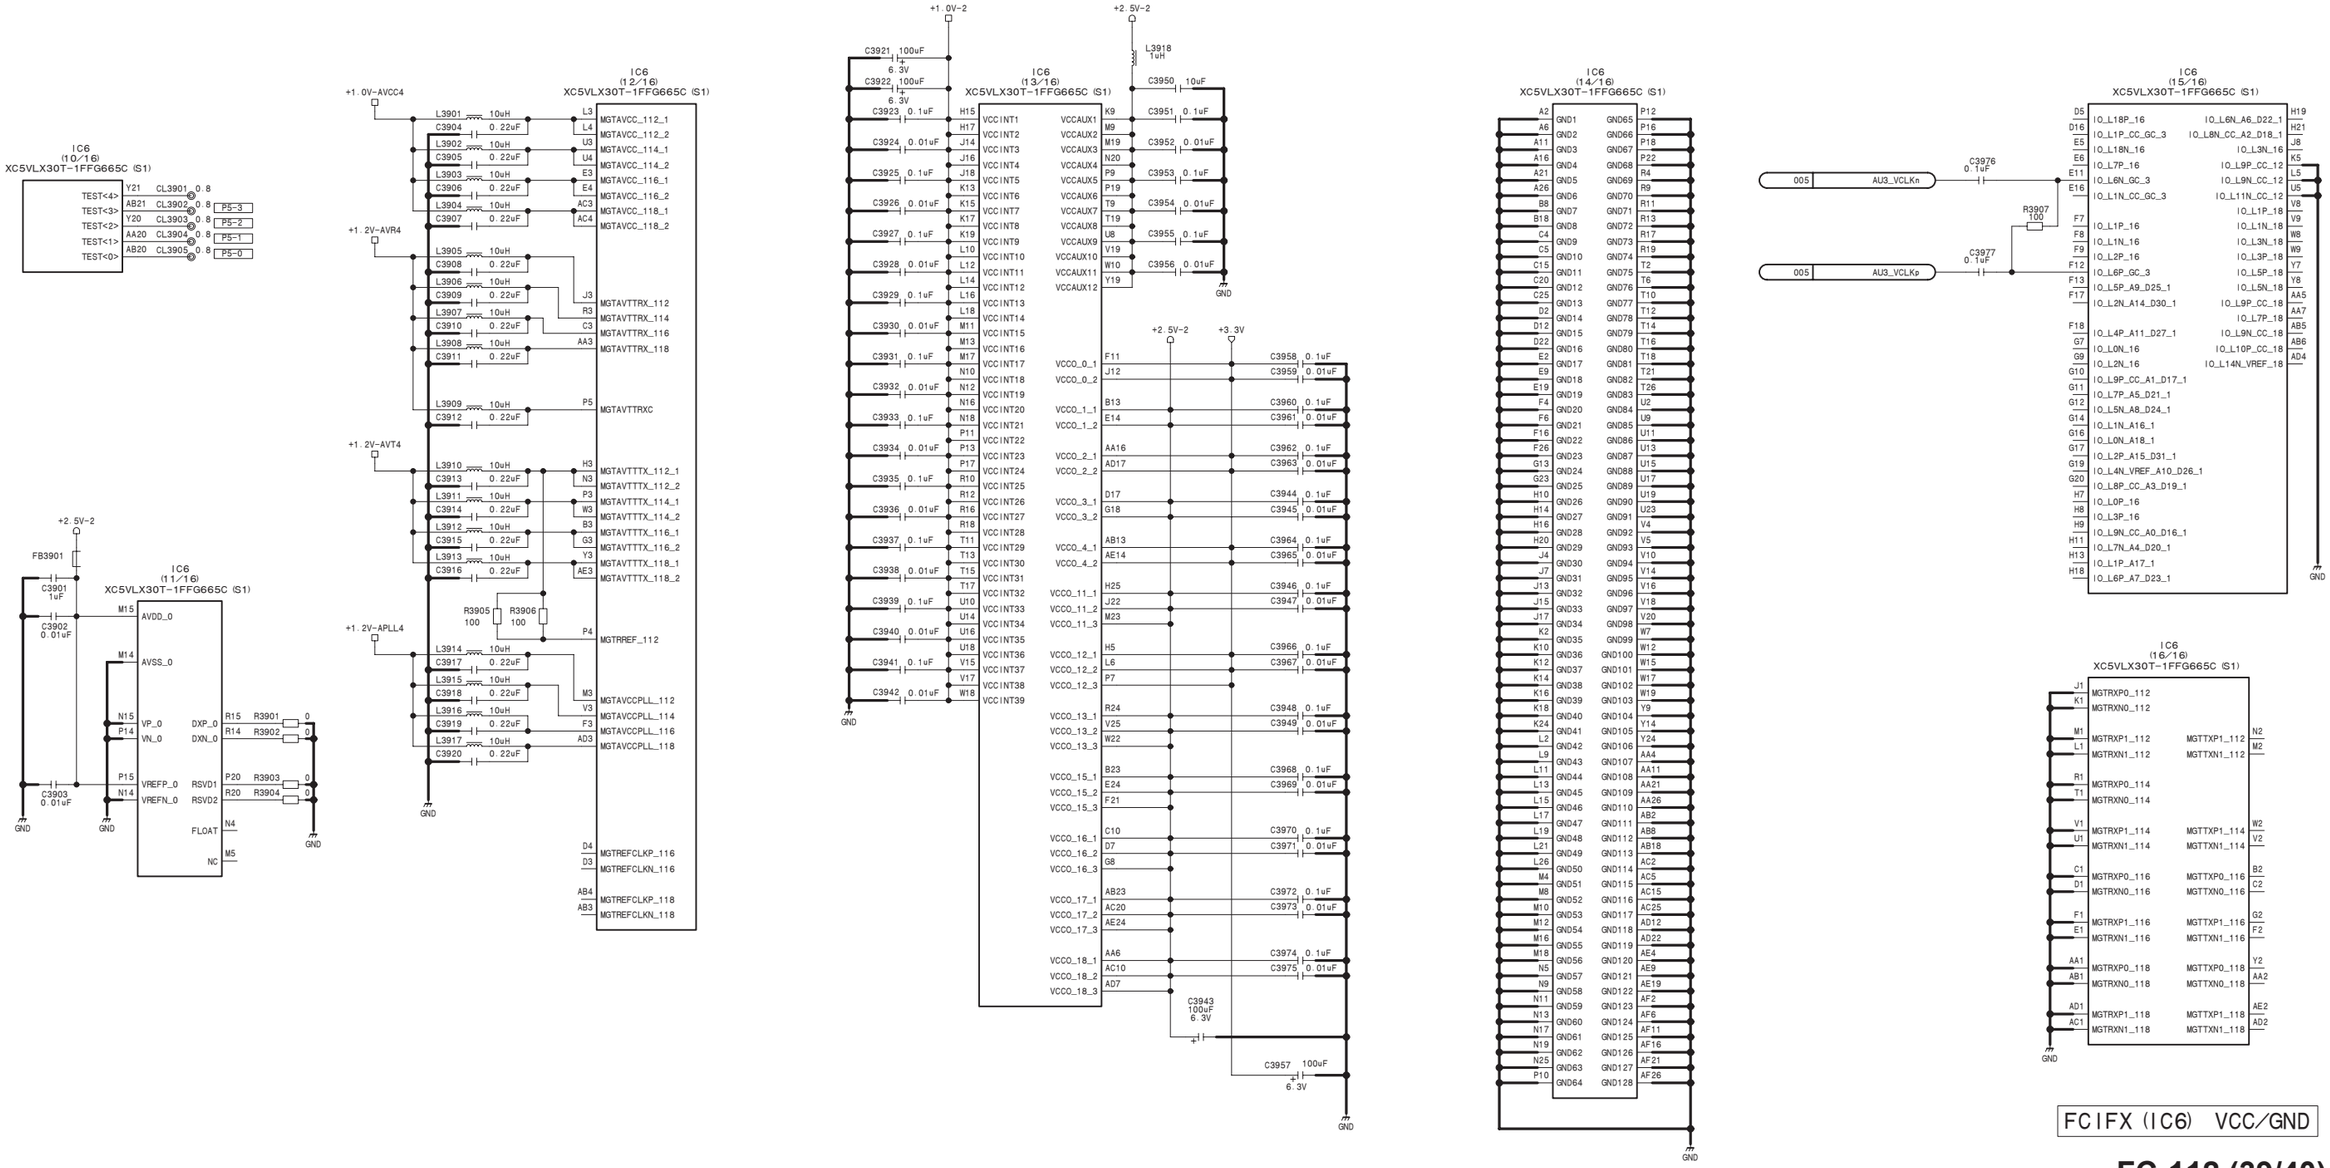

FC-112 (39/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_39

FC-112 (40/40) SUFFIX: -12



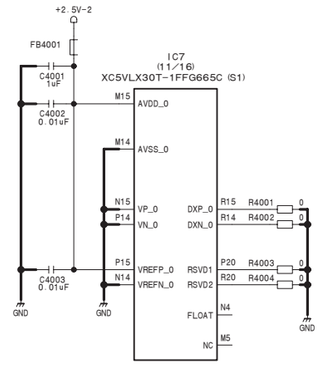

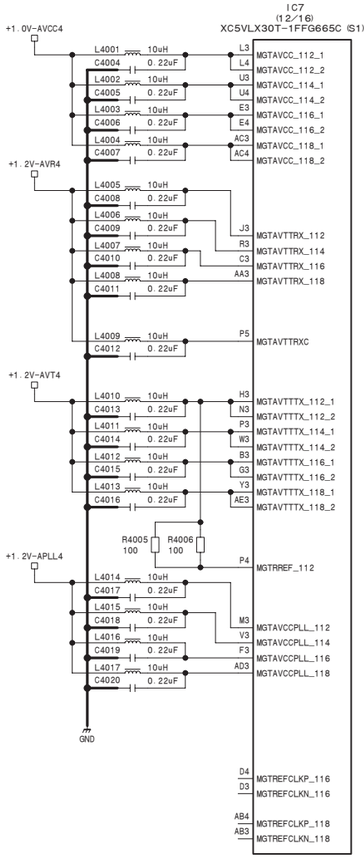

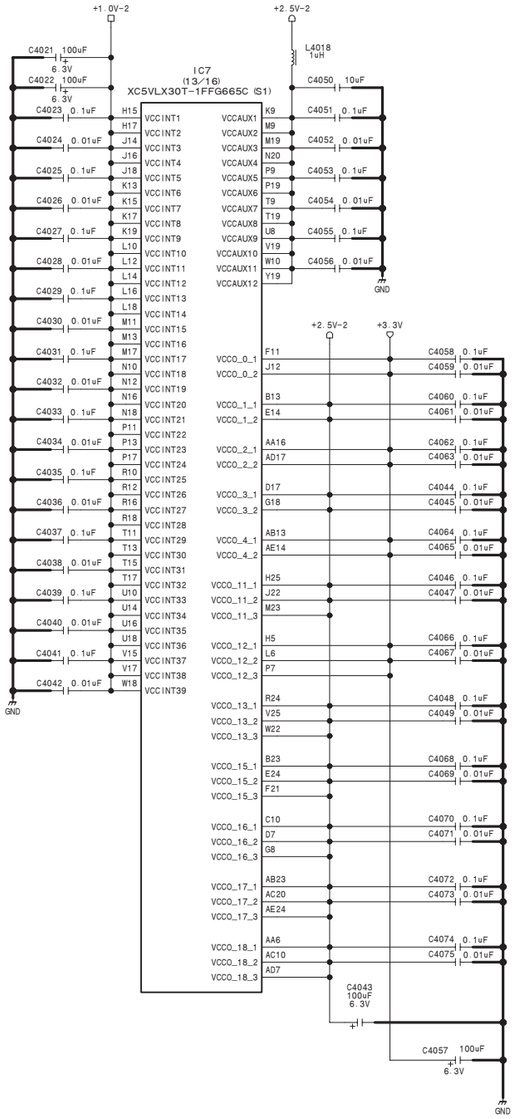

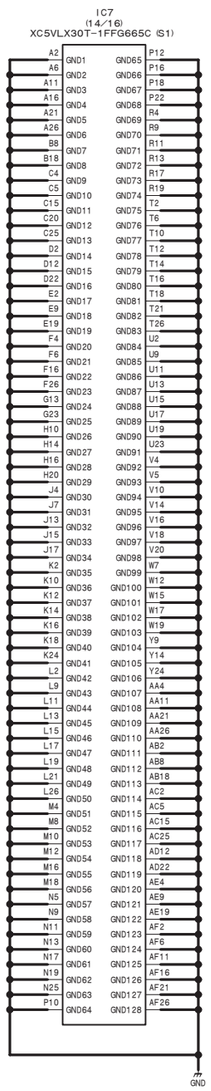

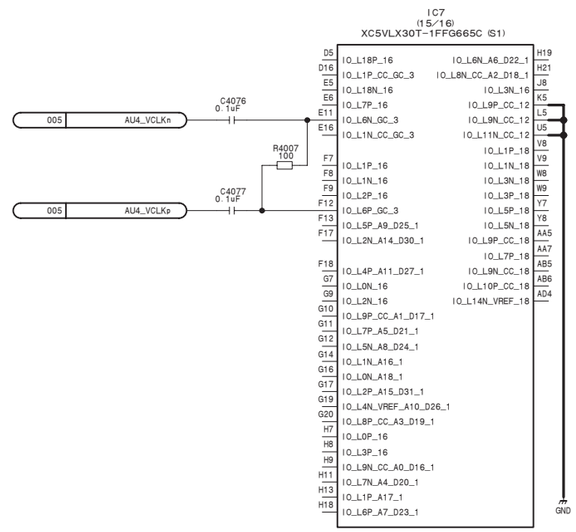

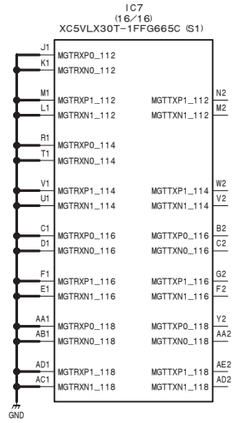

FC IFX (IC7) VCC/GND

FC-112 (40/40)

BOARD NO. 1-879-579-12

MVS-8000X_FC-112_012_40

MY-118 (1/49)
SUFFIX: -12

Leftmost

CNB1

	A	B	BG	C	D	DG
1	12V	12V	12V	12V	12V	12V
2	12V	12V	12V	12V	12V	12V
3	12V	12V	12V	12V	12V	12V
4						
5	RESET	DC_ENBL	GND		FUSE+12V	GND
6	GND		GND			GND
7	SLOT_ID0	SLOT_ID1	GND	SLOT_ID2	SLOT_ID3	GND
8	SLOT_ID4	SLOT_ID5	GND	SLOT_ID6	SLOT_ID7	GND
9			GND			GND
10			GND			GND

CNC1

	A	B	BG	C	D	DG
1	VCLKP	VCLKN	GND			GND
2	FDP	FDN	GND	VDP	VDN	GND
3			GND			GND
4			GND			GND
5			GND			GND
6	INET1_TRX0P	INET1_TRX0N	GND	INET1_TRX1P	INET1_TRX1N	GND
7	INET1_TRX2P	INET1_TRX2N	GND	INET1_TRX3P	INET1_TRX3N	GND
8			GND			GND
9			GND			GND
10			GND			GND

CNL1

	A	B	BG	C	D	DG
1	AESOUT6P	AESOUT6N	GND	AESOUT8P	AESOUT8N	GND
2	AESOUT5P	AESOUT5N	GND	AESOUT7P	AESOUT7N	GND
3	FMOUT16P	FMOUT16N	GND			GND
4	FMOUT15P	FMOUT15N	GND			GND
5	FMOUT14P	FMOUT14N	GND			GND
6	FMOUT13P	FMOUT13N	GND			GND
7	FMOUT12P	FMOUT12N	GND			GND
8	FMOUT11P	FMOUT11N	GND			GND
9	FMOUT10P	FMOUT10N	GND	FM_IN2BP	FM_IN2BN	GND
10	FMOUT9P	FMOUT9N	GND	FM_IN2AP	FM_IN2AN	GND

CNG1

	A	B	BG	C	D	DG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5	FM_USBP	FM_USBN	GND			GND
6			GND			GND
7	FM_MTAP	FM_MTAN	GND	(FM_MTBP)	(FM_MTBN)	GND
8			GND			GND
9	FM_GBE_TRX2P	FM_GBE_TRX2N	GND	FM_GBE_TRX3P	FM_GBE_TRX3N	GND
10	FM_GBE_TRX0P	FM_GBE_TRX0N	GND	FM_GBE_TRX1P	FM_GBE_TRX1N	GND

FM_MTAP & FM_MTAN "PIN" is used by USB Current Limitter Control signal

FM_MTBP & FM_MTBN is not use Because, IEEE1394 not support

CNP1

	A	B	BG	C	D	DG
1	AESOUT2P	AESOUT2N	GND	AESOUT4P	AESOUT4N	GND
2	AESOUT1P	AESOUT1N	GND	AESOUT3P	AESOUT3N	GND
3	FMOUT8P	FMOUT8N	GND			GND
4	FMOUT7P	FMOUT7N	GND			GND
5	FMOUT6P	FMOUT6N	GND			GND
6	FMOUT5P	FMOUT5N	GND			GND
7	FMOUT4P	FMOUT4N	GND			GND
8	FMOUT3P	FMOUT3N	GND			GND
9	FMOUT2P	FMOUT2N	GND	FM_IN1BP	FM_IN1BN	GND
10	FMOUT1P	FMOUT1N	GND	FM_IN1AP	FM_IN1AN	GND

Rightmost

MY-118 (1/49)

BOARD NO. 1-879-578-12

MVS-8000X_MY-118_012_1

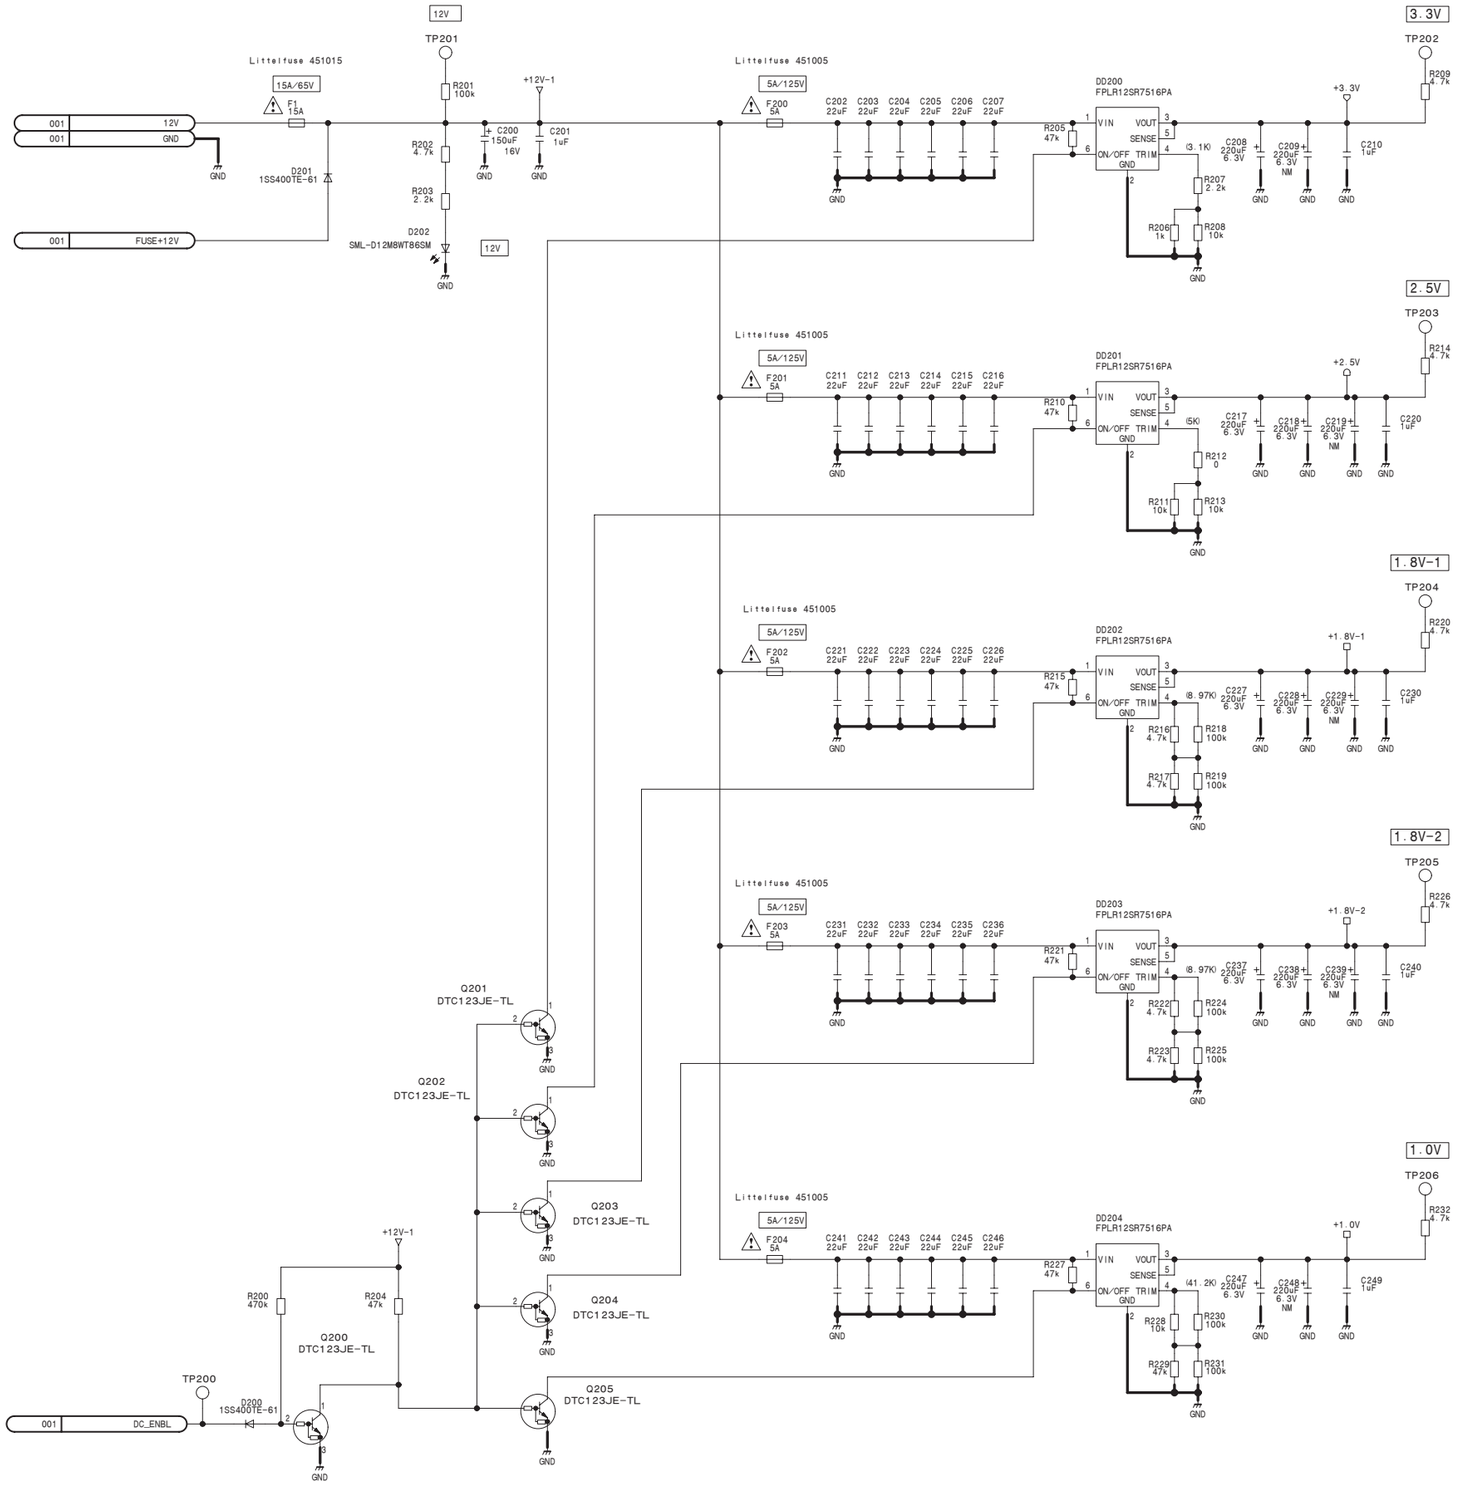

A_SIDE



B_SIDE

Power Supply 1/4

MY-118 (2/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_2

MY-118 (3/49)
SUFFIX: -12

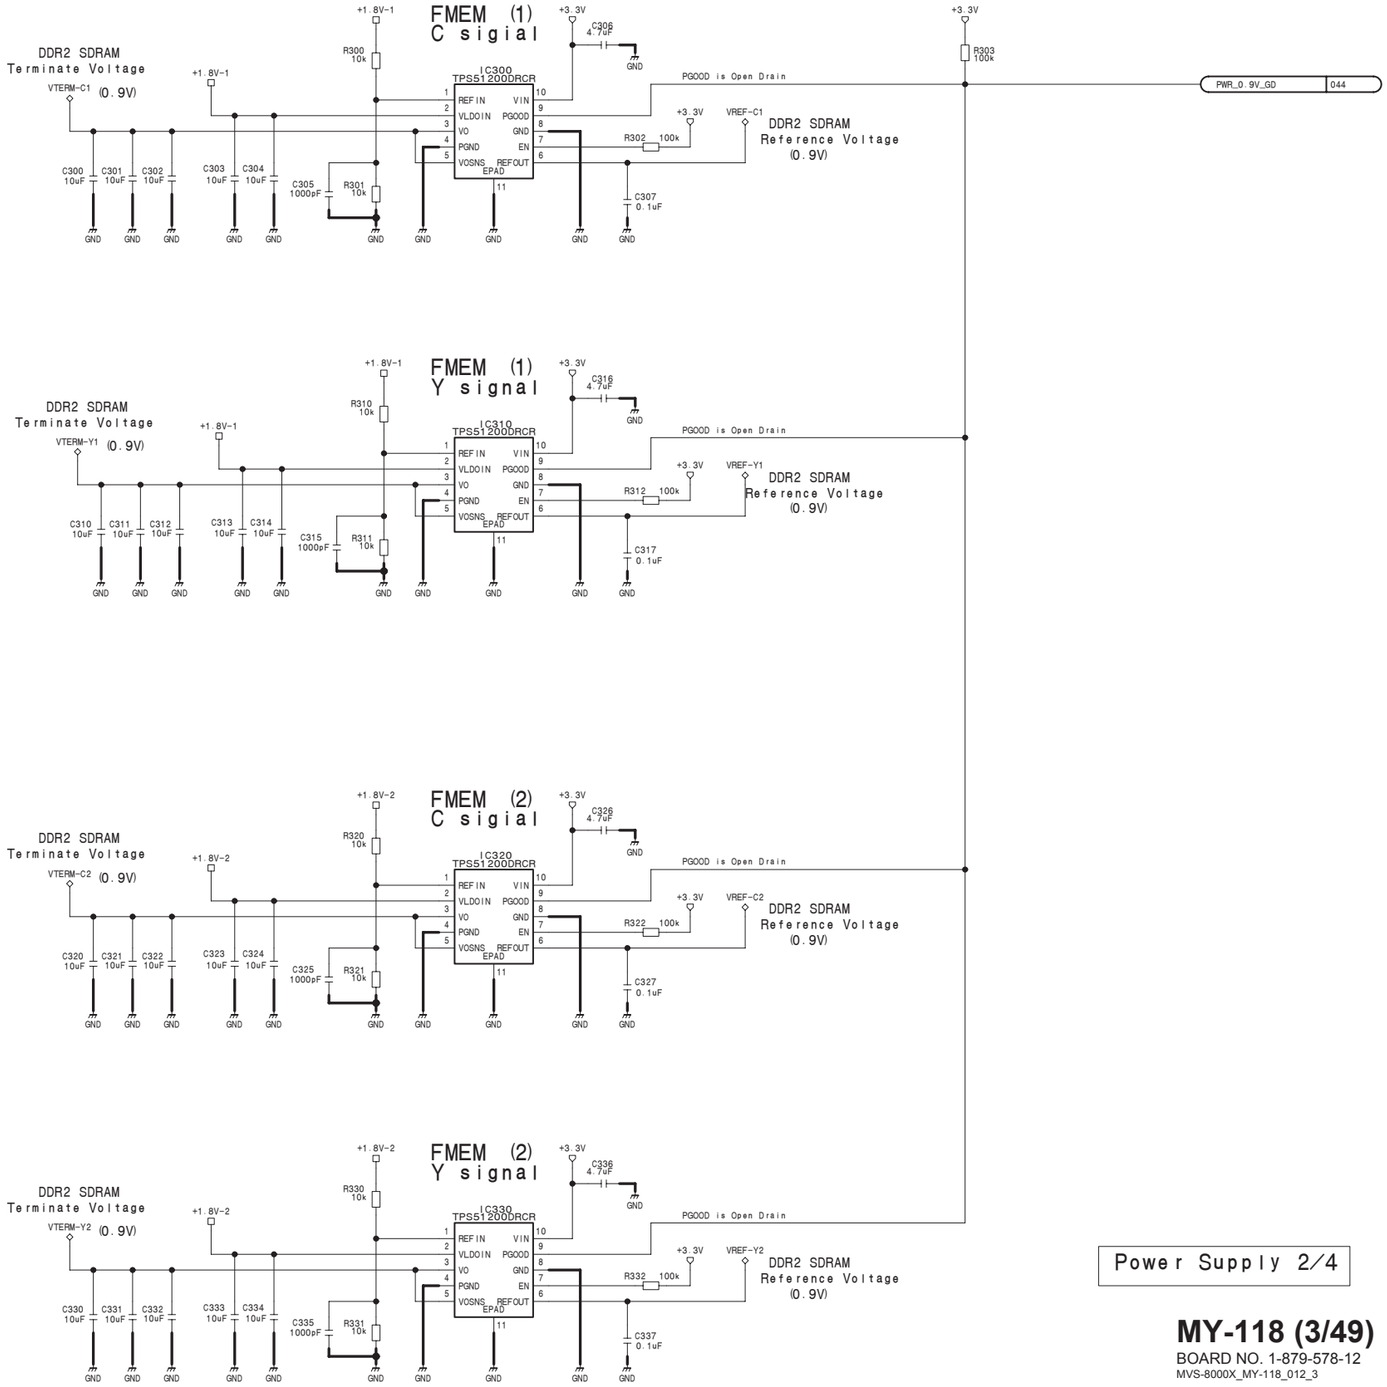

Power Supply 2/4

MY-118 (3/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_3

4-466

Vin = 1.8V-1

MFSDIx AVCC Power

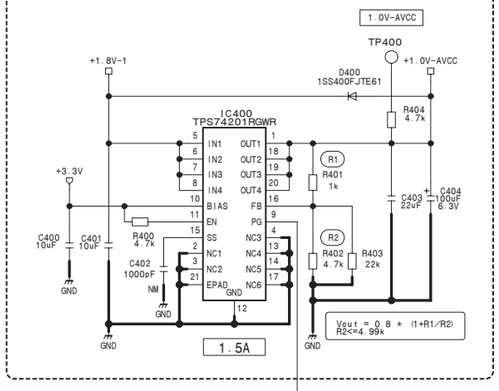

Vin = 1.8V-2

MFSDIx AVTTRX, AVTTRXC, AVTTTX Power

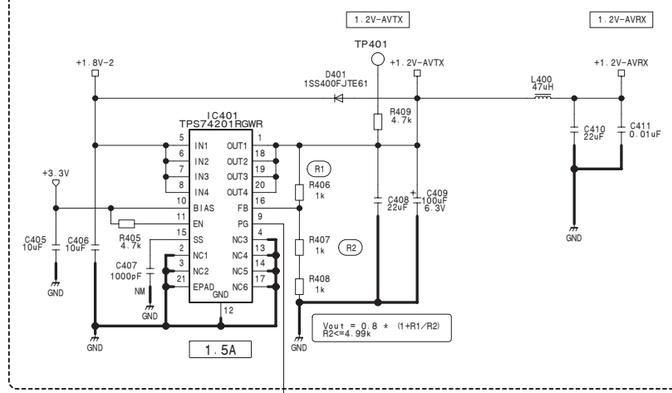

MFSDIx APLL Power

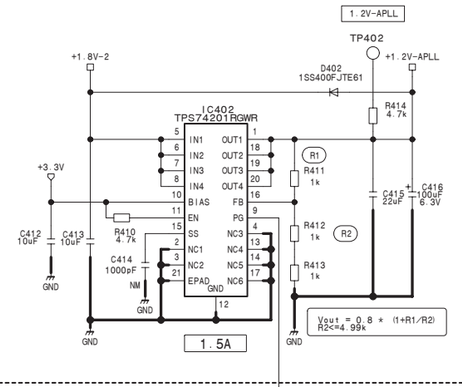



PG (Power-Good) is open-drain

PWR_SERDES_GD | 044

CADEC Internal Power
(Vin = 3.3V)

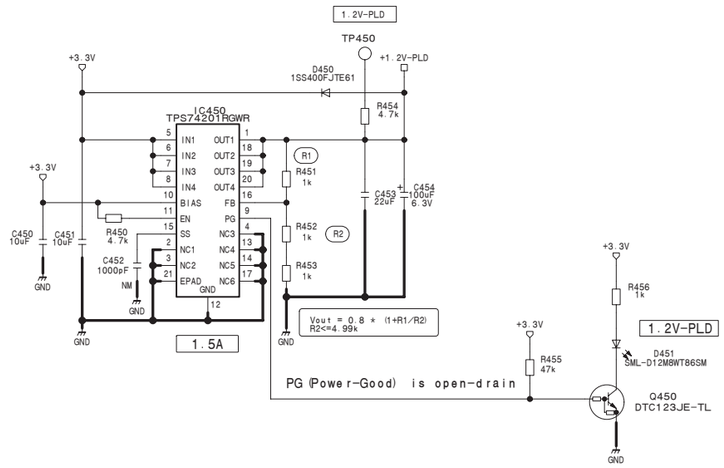

Power Supply 3/4

MY-118 (4/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_4

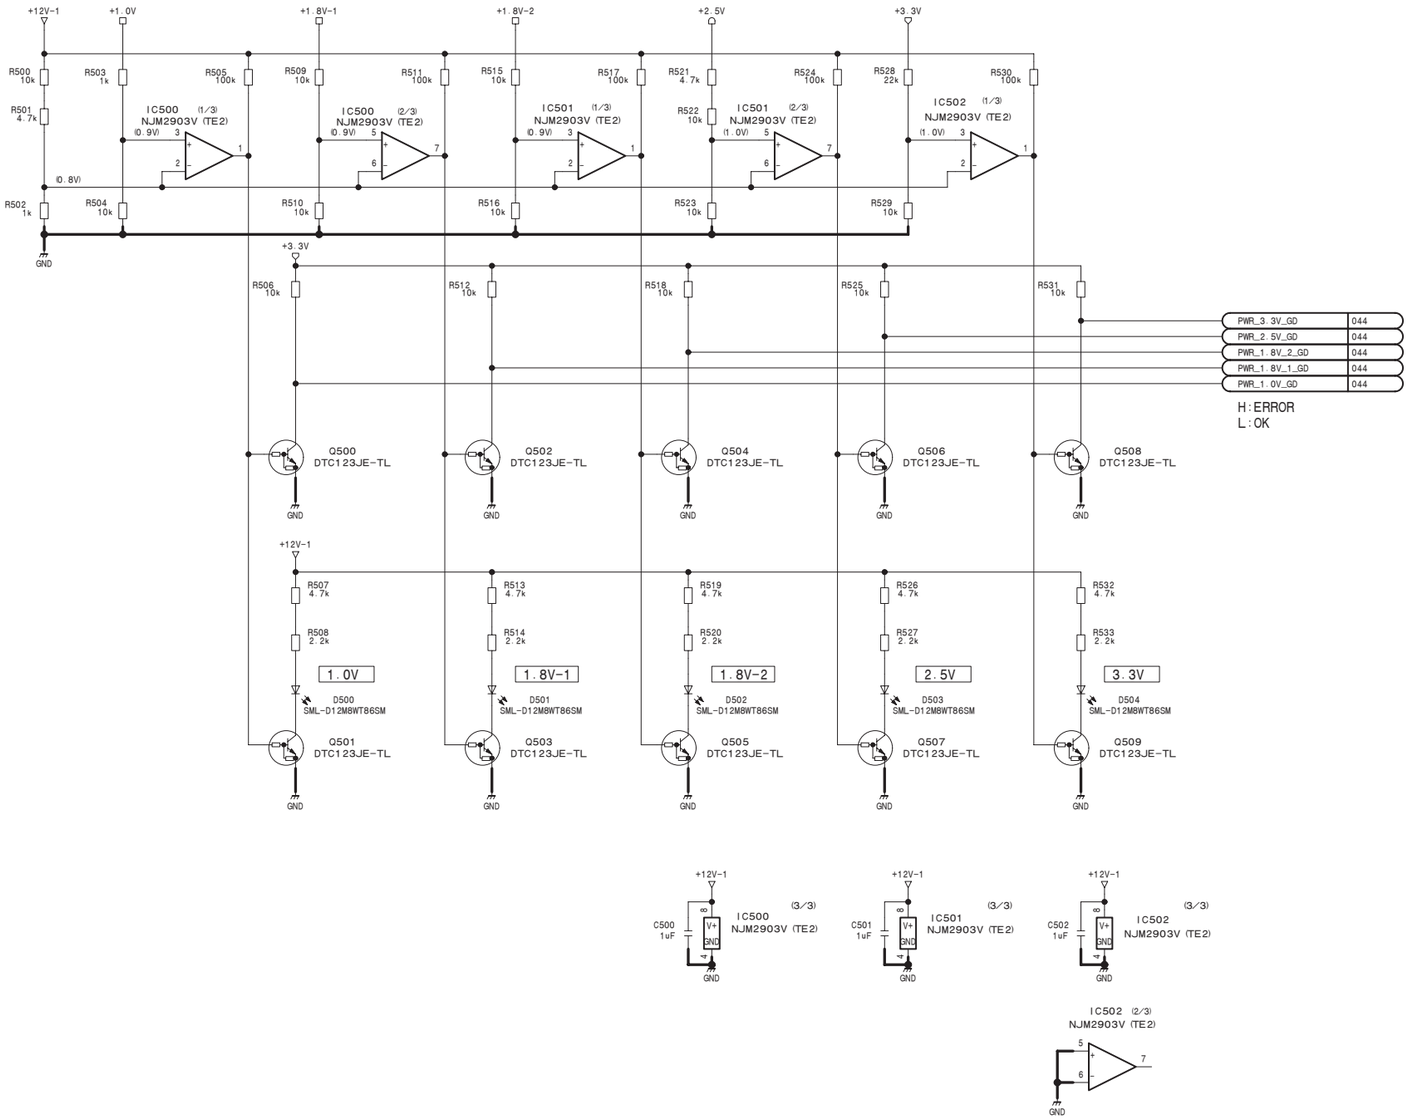

Power Supply 4/4

MY-118 (5/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_5

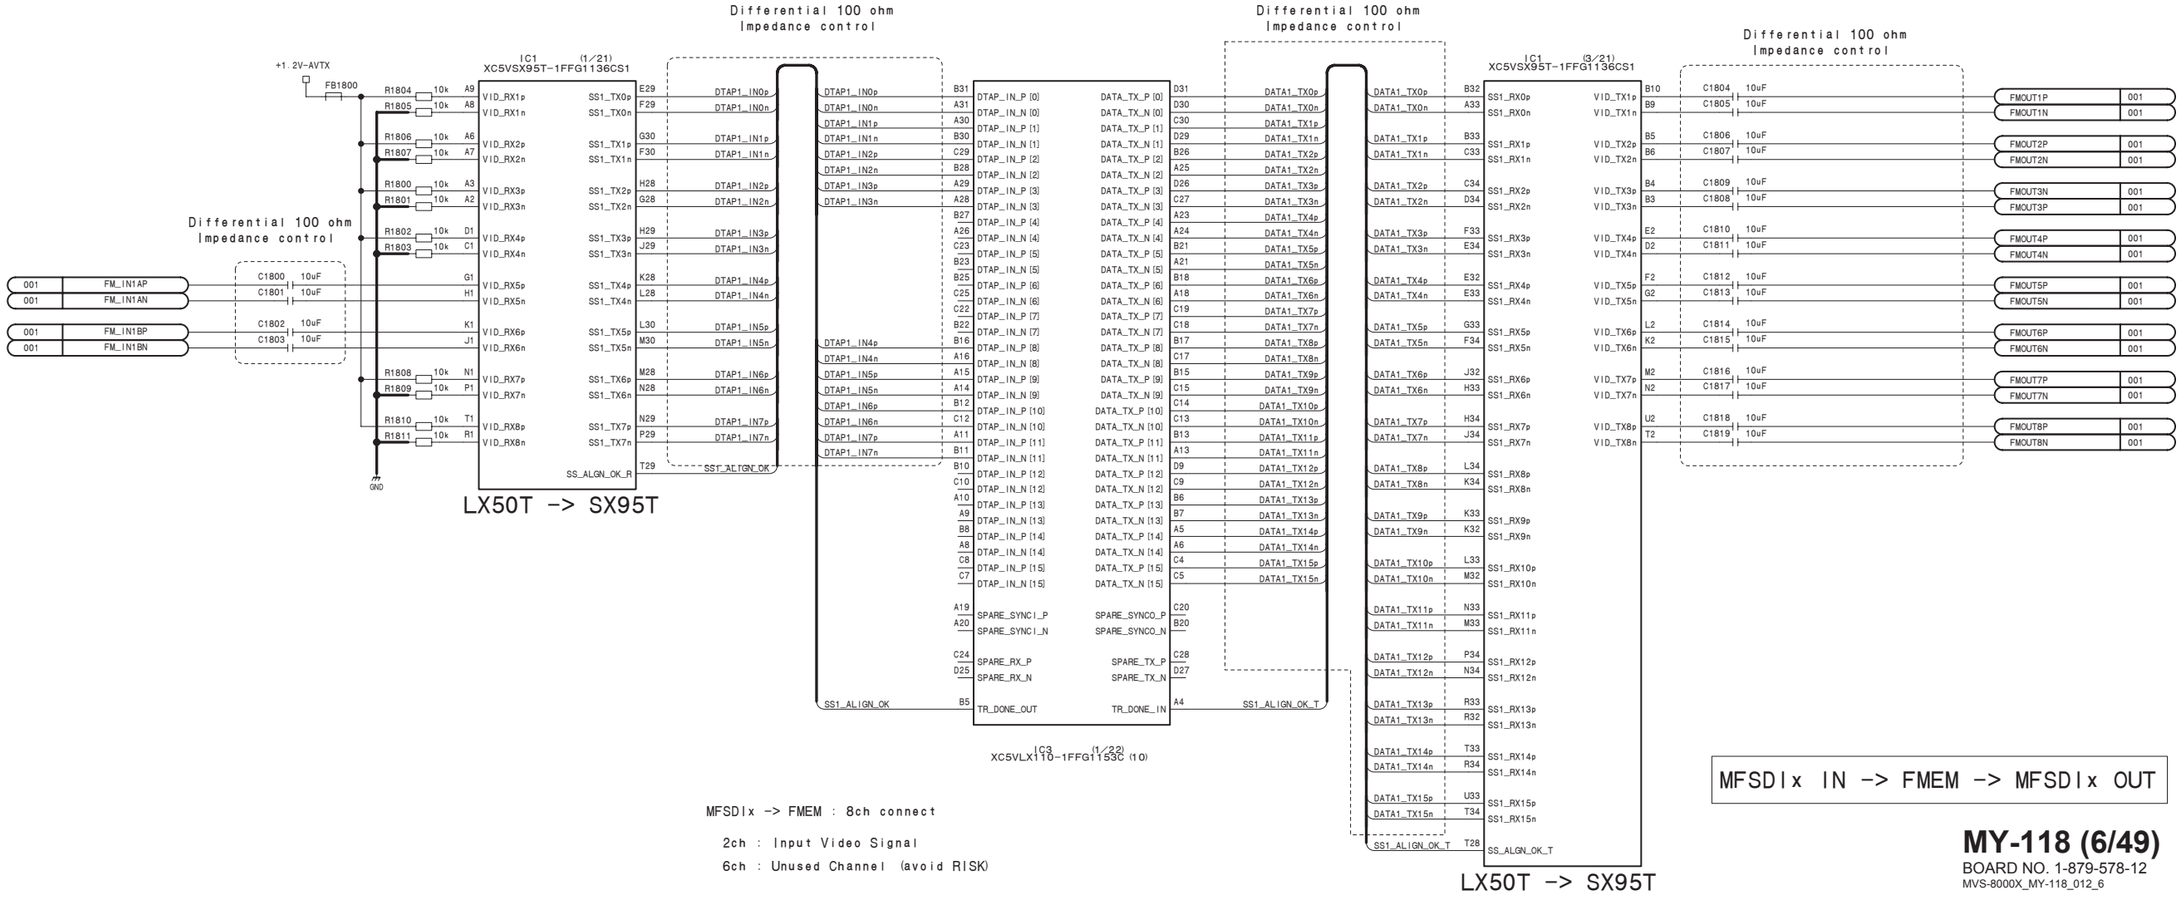
Differential 100 ohm Impedance control
Differential 100 ohm Impedance control
Differential 100 ohm Impedance control
Differential 100 ohm Impedance control
IC1 (1/21) XC5VSX95T-1FFG1136CS1
IC1 (3/21) XC5VSX95T-1FFG1136CS1
IC3 (1/22) XC5VLX110-1FFG1153C (10)
+1.2V-AVTX
FB1800
GND
LX50T -> SX95T
LX50T -> SX95T
MFSDIx -> FMEM : 8ch connect
2ch : Input Video Signal
6ch : Unused Channel (avoid RISK)
MFSDIx IN -> FMEM -> MFSDIx OUT

MY-118 (7/49)
SUFFIX: -12

MFSDIx (ST95T)

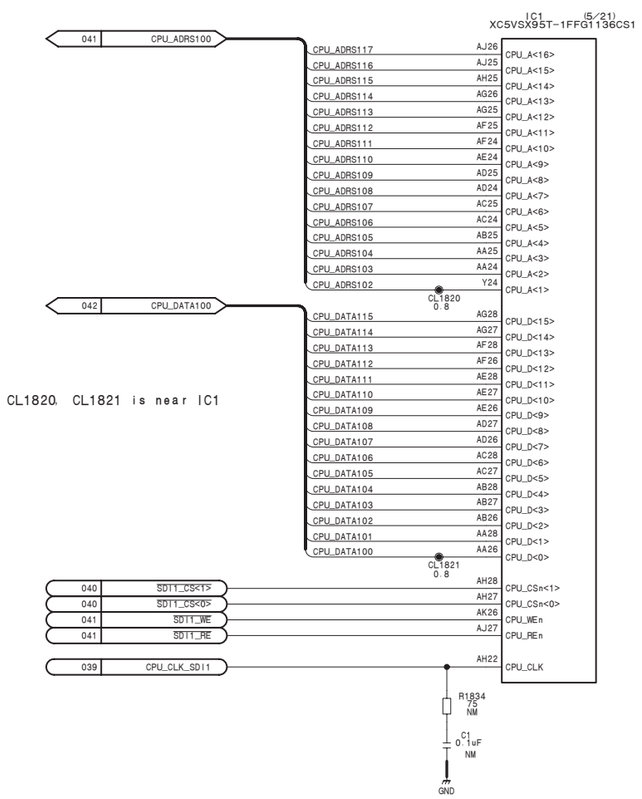

CL1820, CL1821 is near IC1

MFSDIx (SX95T)

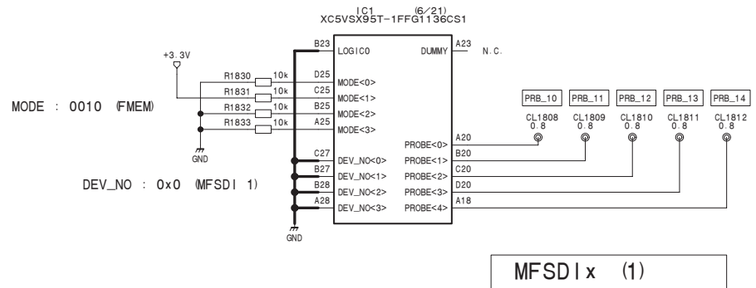

MFSDIx (1)
CPU I/F
MODE, DEV_NO

MY-118 (7/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_7

4-470

IC1 (11/21)
XC5VSX95T-1FFG1136CS1

Y3	MGTREFCLKN_114
Y4	MGTREFCLKP_114
H3	MGTREFCLKN_116
H4	MGTREFCLKP_116
AF3	MGTREFCLKN_118
AF4	MGTREFCLKP_118
D4	MGTREFCLKN_120
E4	MGTREFCLKP_120
AL4	MGTREFCLKN_122
AL5	MGTREFCLKP_122
C8	MGTREFCLKN_124
D8	MGTREFCLKP_124
AM7	MGTREFCLKN_126
AL7	MGTREFCLKP_126

FMEM (1)

024. 041 CPU_ADRS200	CPU_ADRS225	AP22
	CPU_ADRS224	AN22
	CPU_ADRS223	AN23
	CPU_ADRS222	AM23
	CPU_ADRS221	AP24
	CPU_ADRS220	AN24
	CPU_ADRS219	AL24
	CPU_ADRS218	AP25
	CPU_ADRS217	AN25
	CPU_ADRS216	AM25
	CPU_ADRS215	AL25
	CPU_ADRS214	AP26
	CPU_ADRS213	AM26
	CPU_ADRS212	AL26
	CPU_ADRS211	AP27
	CPU_ADRS210	AN27
	CPU_ADRS209	AM27
	CPU_ADRS208	AN28
	CPU_ADRS207	AM28
	CPU_ADRS206	AP29
	CPU_ADRS205	AN29
	CPU_ADRS204	AP30
	CPU_ADRS203	AN30
	CPU_ADRS202	AM30
	CL1840 0.8	
024. 042 CPU_DATA200	CPU_DATA231	AP5
	CPU_DATA230	AN5
	CPU_DATA229	AM5
	CPU_DATA228	AP6
	CPU_DATA227	AM6
	CPU_DATA226	AP7
	CPU_DATA225	AN7
	CPU_DATA224	AM7
	CPU_DATA223	AN8
	CPU_DATA222	AM8
	CPU_DATA221	AP9
	CPU_DATA220	AN9
	CPU_DATA219	AP10
	CPU_DATA218	AN10
	CPU_DATA217	AM10
	CPU_DATA216	AP11
	CPU_DATA215	AM11
	CPU_DATA214	AP12
	CPU_DATA213	AN12
	CPU_DATA212	AM12
	CPU_DATA211	AN13
	CPU_DATA210	AM13
	CPU_DATA209	AP14
	CPU_DATA208	AN14
	CPU_DATA207	AP15
	CPU_DATA206	AN15
	CPU_DATA205	AM15
	CPU_DATA204	AP16
	CPU_DATA203	AM16
	CPU_DATA202	AP17
	CPU_DATA201	AN17
	CPU_DATA200	AM17
	CL1841 0.8	

CL1840, CL1841 is near IC3

CPU_WAIT_ : DMA transfer, control signal
CPU_WAIT_ is open-drain

CPU_WAIT_ AP20 → Go to CADEC FPGA_WAIT 024. 040

LOCKED AH22 — R1856 0 → Go to CADEC PLLRDY 008. 024. 044

SYS_CLK0_IN AH12 — R1857 470 NM, C1844 0.1uF, GND

LVDS signal
148MHz
043 TXCLK1p
043 TXCLK1n
From clock cleaner

differential 100 ohm impedance control

LVPECL -> LVDS conversion

LVPECL signal
74MHz
043 VCLK1p
043 VCLK1n
From clock cleaner

+2.5V, R1841 10k, R1843 10k, R1842 10k, R1844 10k, R1840 100, C1840 0.1uF, C1841 0.1uF, DC level 1.25V, GND

R1846 100 NM, C1846 0.1uF, C1847 0.1uF

Differential 100 ohm impedance control

MFSDIx (ST95T)

IC1 (7/21)
XC5VSX95T-1FFG1136CS1

TXCLKp	P4	VCLKO<0>	V34	R1847 22
TXCLKn	P3	VCLKO<1>	V33	
VCLK1p	H19	VCLKO<2>	AF11	R1859 22 → VCLK_SXT 024
VCLK1n	H20	VCLKO<3>	AG11	
		VDO<0>	Y34	R1848 22
		VDO<1>	Y33	
		VDO<2>	AH9	R1860 22 → VD_SXT 024
		VDO<3>	AH8	
		HDO<0>	W34	R1849 22
		HDO<1>	W32	
		HDO<2>	AF10	R1861 22 → HD_SXT 024
		HDO<3>	AG10	
VDI	AJ34	FDO<0>	AA34	R1850 22
FDI	AH34	FDO<1>	AA33	
		FDO<2>	AJ10	R1862 22 → FD_SXT 024
		FDO<3>	AJ9	
		CKXO<0>	AB33	R1851 22
		CKXO<1>	AB32	
CLK_74p25	AH20	CKXO<2>	AK9	R1863 22 → CKX_SXT 024
		CKXO<3>	AK8	
RESETn	AC34	PLLRDY	AD34	R1852 0

From CADEC
043 VDO
From CADEC
043 FDO
043 REF_CLK1
039 RESET_SDTT

R1845 470 NM, C1842 0.1uF, GND

Go to CADEC PLLRDY 008. 024. 044

From CPU Board
024. 038 DMA
039 RESET_FMEMT

CPU_REQ0, CPU_ACK0, +3. 3V, R1853 100k, R1854 100k

R1855 470 NM, C1843 0.1uF, GND

040 FMEM1_CS	AL29	CPU_CS0_
041 FMEM1_WE	AL30	CPU_WE_
041 FMEM1_RE	AL31	CPU_RE_
039 CPU_CLK_FMEM1	AK19	CPU_CLK_IN
	AM21	REQ_
	AP21	ACK_
	AP19	RESET_

IC3 (2/22)
XC5VLX110-1FFG1153C (10)

FLOE	K21	
VD_	L20	
HD_	L19	
CKX	L21	
CKX_RGN	L23	
VCLK_IN	H12	R1858 470 NM, C1845 0.1uF, GND

From CADEC
043 CKX_RGN1
043 SYS_CLK1

FMEM (1)
CPU BUS. Video signal

MY-118 (8/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_8

A B C D E F G H

1 2 3 4 5

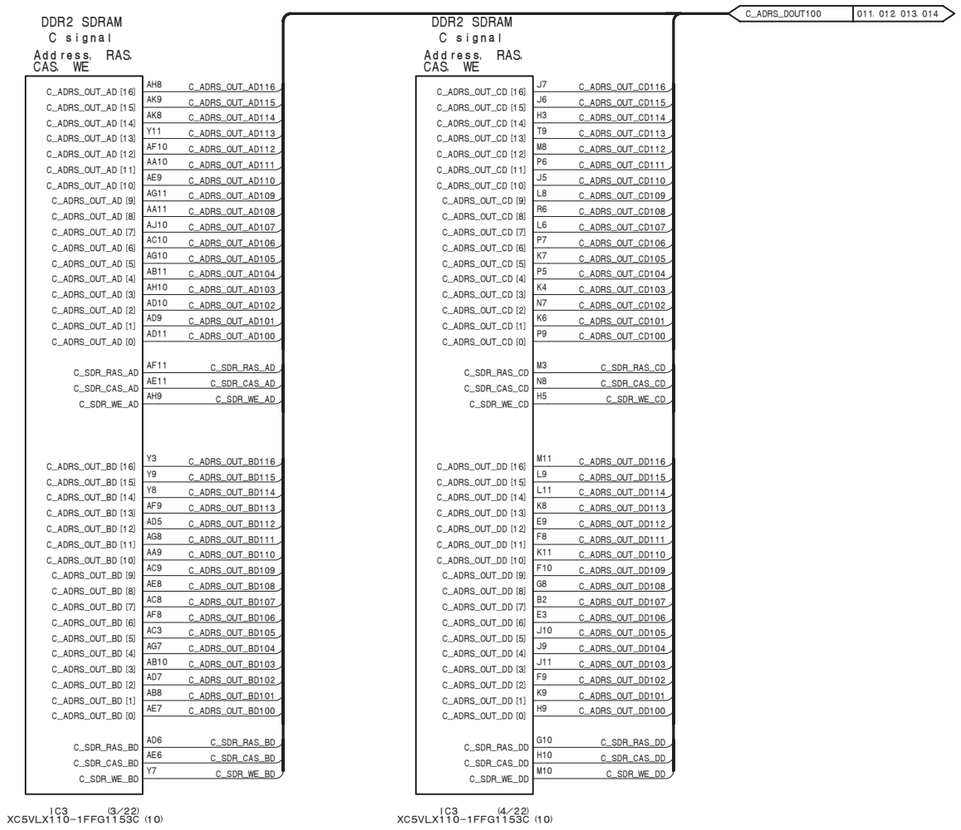

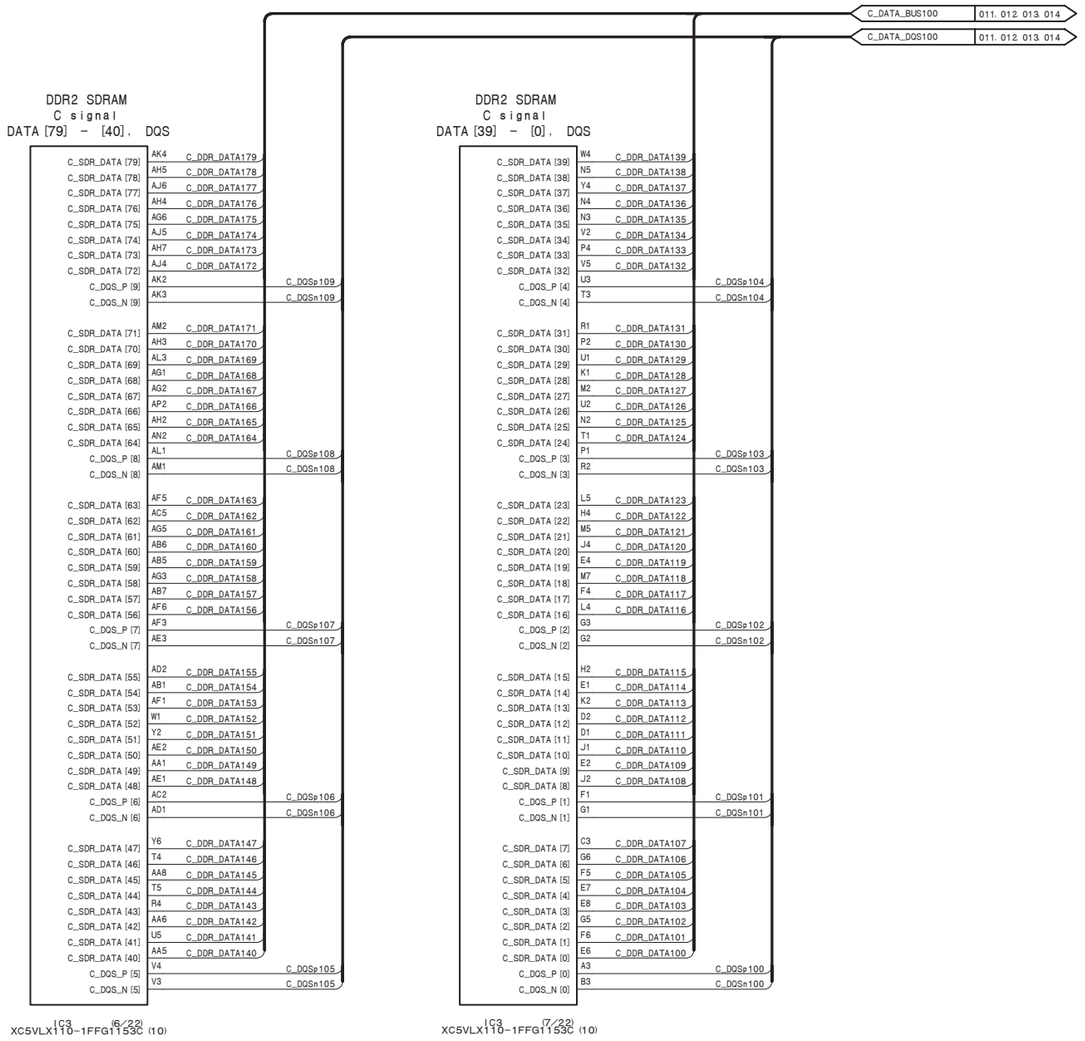

FMEM (1), C signal
Address, RAS, CAS, WE
CS, ODT, CKE, memory clock
DATA, DQS

MY-118 (9/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_9

DDR2 SDRAM
Y signal
Address, RAS, CAS, WE

Y_ADRS_OUT_AD [16]
Y_ADRS_OUT_AD [15]
Y_ADRS_OUT_AD [14]
Y_ADRS_OUT_AD [13]
Y_ADRS_OUT_AD [12]
Y_ADRS_OUT_AD [11]
Y_ADRS_OUT_AD [10]
Y_ADRS_OUT_AD [9]
Y_ADRS_OUT_AD [8]
Y_ADRS_OUT_AD [7]
Y_ADRS_OUT_AD [6]
Y_ADRS_OUT_AD [5]
Y_ADRS_OUT_AD [4]
Y_ADRS_OUT_AD [3]
Y_ADRS_OUT_AD [2]
Y_ADRS_OUT_AD [1]
Y_ADRS_OUT_AD [0]

H28 Y_ADRS_OUT_AD116
J27 Y_ADRS_OUT_AD115
G28 Y_ADRS_OUT_AD114
K24 Y_ADRS_OUT_AD113
E27 Y_ADRS_OUT_AD112
J25 Y_ADRS_OUT_AD111
H27 Y_ADRS_OUT_AD110
F26 Y_ADRS_OUT_AD109
J24 Y_ADRS_OUT_AD108
E28 Y_ADRS_OUT_AD107
H25 Y_ADRS_OUT_AD106
E31 Y_ADRS_OUT_AD105
H24 Y_ADRS_OUT_AD104
E32 Y_ADRS_OUT_AD103
G26 Y_ADRS_OUT_AD102
G27 Y_ADRS_OUT_AD101
G25 Y_ADRS_OUT_AD100

Y_SDR_RAS_AD
Y_SDR_CAS_AD
Y_SDR_WE_AD

F25 Y_SDR_RAS_AD
E26 Y_SDR_CAS_AD
K27 Y_SDR_WE_AD

Y_ADRS_OUT_BD [16]
Y_ADRS_OUT_BD [15]
Y_ADRS_OUT_BD [14]
Y_ADRS_OUT_BD [13]
Y_ADRS_OUT_BD [12]
Y_ADRS_OUT_BD [11]
Y_ADRS_OUT_BD [10]
Y_ADRS_OUT_BD [9]
Y_ADRS_OUT_BD [8]
Y_ADRS_OUT_BD [7]
Y_ADRS_OUT_BD [6]
Y_ADRS_OUT_BD [5]
Y_ADRS_OUT_BD [4]
Y_ADRS_OUT_BD [3]
Y_ADRS_OUT_BD [2]
Y_ADRS_OUT_BD [1]
Y_ADRS_OUT_BD [0]

T29 Y_ADRS_OUT_BD116
R27 Y_ADRS_OUT_BD115
R32 Y_ADRS_OUT_BD114
J29 Y_ADRS_OUT_BD113
M31 Y_ADRS_OUT_BD112
K28 Y_ADRS_OUT_BD111
R26 Y_ADRS_OUT_BD110
M30 Y_ADRS_OUT_BD109
J30 Y_ADRS_OUT_BD108
P26 Y_ADRS_OUT_BD107
L25 Y_ADRS_OUT_BD106
N28 Y_ADRS_OUT_BD105
K29 Y_ADRS_OUT_BD104
P27 Y_ADRS_OUT_BD103
M25 Y_ADRS_OUT_BD102
P29 Y_ADRS_OUT_BD101
L26 Y_ADRS_OUT_BD100

Y_SDR_RAS_BD
Y_SDR_CAS_BD
Y_SDR_WE_BD

M32 Y_SDR_RAS_BD
M26 Y_SDR_CAS_BD
T28 Y_SDR_WE_BD

IC3 (8/22)
XC5VLX110-1FFG1153C (10)

DDR2 SDRAM
Y signal
Address, RAS, CAS, WE

Y_ADRS_OUT_CD [16]
Y_ADRS_OUT_CD [15]
Y_ADRS_OUT_CD [14]
Y_ADRS_OUT_CD [13]
Y_ADRS_OUT_CD [12]
Y_ADRS_OUT_CD [11]
Y_ADRS_OUT_CD [10]
Y_ADRS_OUT_CD [9]
Y_ADRS_OUT_CD [8]
Y_ADRS_OUT_CD [7]
Y_ADRS_OUT_CD [6]
Y_ADRS_OUT_CD [5]
Y_ADRS_OUT_CD [4]
Y_ADRS_OUT_CD [3]
Y_ADRS_OUT_CD [2]
Y_ADRS_OUT_CD [1]
Y_ADRS_OUT_CD [0]

AH27 Y_ADRS_OUT_CD116
AG30 Y_ADRS_OUT_CD115
AG27 Y_ADRS_OUT_CD114
Y28 Y_ADRS_OUT_CD113
AD29 Y_ADRS_OUT_CD112
AA26 Y_ADRS_OUT_CD111
AG28 Y_ADRS_OUT_CD110
AE26 Y_ADRS_OUT_CD109
Y32 Y_ADRS_OUT_CD108
AE27 Y_ADRS_OUT_CD107
AB27 Y_ADRS_OUT_CD106
AE33 Y_ADRS_OUT_CD105
AA28 Y_ADRS_OUT_CD104
AF28 Y_ADRS_OUT_CD103
AC27 Y_ADRS_OUT_CD102
AF29 Y_ADRS_OUT_CD101
AB28 Y_ADRS_OUT_CD100

Y_SDR_RAS_CD
Y_SDR_CAS_CD
Y_SDR_WE_CD

AD26 Y_SDR_RAS_CD
AC28 Y_SDR_CAS_CD
AH28 Y_SDR_WE_CD

Y_ADRS_OUT_DD [16]
Y_ADRS_OUT_DD [15]
Y_ADRS_OUT_DD [14]
Y_ADRS_OUT_DD [13]
Y_ADRS_OUT_DD [12]
Y_ADRS_OUT_DD [11]
Y_ADRS_OUT_DD [10]
Y_ADRS_OUT_DD [9]
Y_ADRS_OUT_DD [8]
Y_ADRS_OUT_DD [7]
Y_ADRS_OUT_DD [6]
Y_ADRS_OUT_DD [5]
Y_ADRS_OUT_DD [4]
Y_ADRS_OUT_DD [3]
Y_ADRS_OUT_DD [2]
Y_ADRS_OUT_DD [1]
Y_ADRS_OUT_DD [0]

Y24 Y_ADRS_OUT_DD116
AB25 Y_ADRS_OUT_DD115
AA25 Y_ADRS_OUT_DD114
AJ27 Y_ADRS_OUT_DD113
AE24 Y_ADRS_OUT_DD112
AK28 Y_ADRS_OUT_DD111
AB26 Y_ADRS_OUT_DD110
AF24 Y_ADRS_OUT_DD109
AK27 Y_ADRS_OUT_DD108
AD25 Y_ADRS_OUT_DD107
AF26 Y_ADRS_OUT_DD106
AD24 Y_ADRS_OUT_DD105
AK33 Y_ADRS_OUT_DD104
AC25 Y_ADRS_OUT_DD103
AK26 Y_ADRS_OUT_DD102
AC24 Y_ADRS_OUT_DD101
AJ26 Y_ADRS_OUT_DD100

Y_SDR_RAS_DD
Y_SDR_CAS_DD
Y_SDR_WE_DD

AG25 Y_SDR_RAS_DD
AF25 Y_SDR_CAS_DD
AA24 Y_SDR_WE_DD

IC3 (9/22)
XC5VLX110-1FFG1153C (10)

Y_ADRS_DOUT100 015. 016. 017. 018

DDR2 SDRAM
Y signal
CS, ODT, CKE, Clock

Y_CTRL_U0CS_D
Y_CTRL_L0CS_D

U27 Y_CTRL_U0CS_D
W26 Y_CTRL_L0CS_D

Y_U0_ODT
Y_L0_ODT

T25 Y_U0_ODT
V27 Y_L0_ODT

Y_CTRL_U0CKE
Y_CTRL_L0CKE

T26 Y_CTRL_U0CKE
W27 Y_CTRL_L0CKE

Y_CTRL_U1CS_D
Y_CTRL_L1CS_D

T24 Y_CTRL_U1CS_D
V25 Y_CTRL_L1CS_D

Y_U1_ODT
Y_L1_ODT

U25 Y_U1_ODT
V27 Y_L1_ODT

Y_CTRL_U1CKE
Y_CTRL_L1CKE

U26 Y_CTRL_U1CKE
W25 Y_CTRL_L1CKE

Y_DDR0_CLKp
Y_DDR0_CLKn

AN32 Y_DDR100_CLKp
AP32 Y_DDR100_CLKn

Y_DDR1_CLKp
Y_DDR1_CLKn

AB31 Y_DDR101_CLKp
AA31 Y_DDR101_CLKn

Y_DDR2_CLKp
Y_DDR2_CLKn

U31 Y_DDR102_CLKp
U32 Y_DDR102_CLKn

Y_DDR3_CLKp
Y_DDR3_CLKn

K33 Y_DDR103_CLKp
K32 Y_DDR103_CLKn

Y_DDR4_CLKp
Y_DDR4_CLKn

B32 Y_DDR104_CLKp
A33 Y_DDR104_CLKn

Y_CTRL_DOUT100 015. 016. 017. 018
Y_DDR_CLK100 015. 016. 017. 018

IC3 (10/22)
XC5VLX110-1FFG1153C (10)

DDR2 SDRAM
Y signal
DATA [79] - [40], DQS

Y_SDR_DATA [79]
Y_SDR_DATA [78]
Y_SDR_DATA [77]
Y_SDR_DATA [76]
Y_SDR_DATA [75]
Y_SDR_DATA [74]
Y_SDR_DATA [73]
Y_SDR_DATA [72]
Y_DQS_P [9]
Y_DQS_N [9]

B33 Y_DDR_DATA179
F31 Y_DDR_DATA178
E29 Y_DDR_DATA177
G30 Y_DDR_DATA176
G31 Y_DDR_DATA175
F28 Y_DDR_DATA174
F30 Y_DDR_DATA173
F29 Y_DDR_DATA172
C32 Y_DQSp109
D32 Y_DQSn109

Y_SDR_DATA [71]
Y_SDR_DATA [70]
Y_SDR_DATA [69]
Y_SDR_DATA [68]
Y_SDR_DATA [67]
Y_SDR_DATA [66]
Y_SDR_DATA [65]
Y_SDR_DATA [64]
Y_DQS_P [8]
Y_DQS_N [8]

E33 Y_DDR_DATA171
F34 Y_DDR_DATA170
C33 Y_DDR_DATA169
K34 Y_DDR_DATA168
J34 Y_DDR_DATA167
C34 Y_DDR_DATA166
H34 Y_DDR_DATA165
D34 Y_DDR_DATA164
F33 Y_DQSp108
E34 Y_DQSn108

Y_SDR_DATA [63]
Y_SDR_DATA [62]
Y_SDR_DATA [61]
Y_SDR_DATA [60]
Y_SDR_DATA [59]
Y_SDR_DATA [58]
Y_SDR_DATA [57]
Y_SDR_DATA [56]
Y_DQS_P [7]
Y_DQS_N [7]

G33 Y_DDR_DATA163
N30 Y_DDR_DATA162
G32 Y_DDR_DATA161
P30 Y_DDR_DATA160
P31 Y_DDR_DATA159
H29 Y_DDR_DATA158
N29 Y_DDR_DATA157
H30 Y_DDR_DATA156
J32 Y_DQSp107
H33 Y_DQSn107

Y_SDR_DATA [55]
Y_SDR_DATA [54]
Y_SDR_DATA [53]
Y_SDR_DATA [52]
Y_SDR_DATA [51]
Y_SDR_DATA [50]
Y_SDR_DATA [49]
Y_SDR_DATA [48]
Y_DQS_P [6]
Y_DQS_N [6]

R33 Y_DDR_DATA155
T34 Y_DDR_DATA154
L33 Y_DDR_DATA153
W34 Y_DDR_DATA152
V34 Y_DDR_DATA151
L34 Y_DDR_DATA150
U33 Y_DDR_DATA149
P34 Y_DDR_DATA148
T33 Y_DQSp106
R34 Y_DQSn106

Y_SDR_DATA [47]
Y_SDR_DATA [46]
Y_SDR_DATA [45]
Y_SDR_DATA [44]
Y_SDR_DATA [43]
Y_SDR_DATA [42]
Y_SDR_DATA [41]
Y_SDR_DATA [40]
Y_DQS_P [5]
Y_DQS_N [5]

L28 Y_DDR_DATA147
U28 Y_DDR_DATA146
L30 Y_DDR_DATA145
T31 Y_DDR_DATA144
U30 Y_DDR_DATA143
L31 Y_DDR_DATA142
R31 Y_DDR_DATA141
M28 Y_DDR_DATA140
P32 Y_DQSp105
N32 Y_DQSn105

IC3 (11/22)
XC5VLX110-1FFG1153C (10)

DDR2 SDRAM
Y signal
DATA [39] - [0], DQS

Y_SDR_DATA [39]
Y_SDR_DATA [38]
Y_SDR_DATA [37]
Y_SDR_DATA [36]
Y_SDR_DATA [35]
Y_SDR_DATA [34]
Y_SDR_DATA [33]
Y_SDR_DATA [32]
Y_DQS_P [4]
Y_DQS_N [4]

V30 Y_DDR_DATA139
Y29 Y_DDR_DATA138
V28 Y_DDR_DATA137
AA30 Y_DDR_DATA136
AA29 Y_DDR_DATA135
V29 Y_DDR_DATA134
Y31 Y_DDR_DATA133
W29 Y_DDR_DATA132
V33 Y_DQSp104
V32 Y_DQSn104

Y_SDR_DATA [31]
Y_SDR_DATA [30]
Y_SDR_DATA [29]
Y_SDR_DATA [28]
Y_SDR_DATA [27]
Y_SDR_DATA [26]
Y_SDR_DATA [25]
Y_SDR_DATA [24]
Y_DQS_P [3]
Y_DQS_N [3]

AA34 Y_DDR_DATA131
AC34 Y_DDR_DATA130
Y33 Y_DDR_DATA129
AE34 Y_DDR_DATA128
AD34 Y_DDR_DATA127
Y34 Y_DDR_DATA126
AC32 Y_DDR_DATA125
AA33 Y_DDR_DATA124
AC33 Y_DQSp103
AB33 Y_DQSn103

Y_SDR_DATA [23]
Y_SDR_DATA [22]
Y_SDR_DATA [21]
Y_SDR_DATA [20]
Y_SDR_DATA [19]
Y_SDR_DATA [18]
Y_SDR_DATA [17]
Y_SDR_DATA [16]
Y_DQS_P [2]
Y_DQS_N [2]

AC30 Y_DDR_DATA123
AE28 Y_DDR_DATA122
AB30 Y_DDR_DATA121
AF33 Y_DDR_DATA120
AF31 Y_DDR_DATA119
AB32 Y_DDR_DATA118
AE29 Y_DDR_DATA117
AC29 Y_DDR_DATA116
AD32 Y_DQSp102
AE32 Y_DQSn102

Y_SDR_DATA [15]
Y_SDR_DATA [14]
Y_SDR_DATA [13]
Y_SDR_DATA [12]
Y_SDR_DATA [11]
Y_SDR_DATA [10]
Y_SDR_DATA [9]
Y_SDR_DATA [8]
Y_DQS_P [1]
Y_DQS_N [1]

AK34 Y_DDR_DATA115
AM32 Y_DDR_DATA114
AF34 Y_DDR_DATA113
AN33 Y_DDR_DATA112
AN34 Y_DDR_DATA111
AH34 Y_DDR_DATA110
AM33 Y_DDR_DATA109
AJ34 Y_DDR_DATA108
AL34 Y_DQSp101
AL33 Y_DQSn101

Y_SDR_DATA [7]
Y_SDR_DATA [6]
Y_SDR_DATA [5]
Y_SDR_DATA [4]
Y_SDR_DATA [3]
Y_SDR_DATA [2]
Y_SDR_DATA [1]
Y_SDR_DATA [0]
Y_DQS_P [0]
Y_DQS_N [0]

AH30 Y_DDR_DATA107
AJ30 Y_DDR_DATA106
AF30 Y_DDR_DATA105
AJ29 Y_DDR_DATA104
AK29 Y_DDR_DATA103
AG32 Y_DDR_DATA102
AK31 Y_DDR_DATA101
AH29 Y_DDR_DATA100
AJ32 Y_DQSp100
AK32 Y_DQSn100

IC3 (12/22)
XC5VLX110-1FFG1153C (10)

Y_DATA_BUS100 015. 016. 017. 018
Y_DATA_DQS100 015. 016. 017. 018

FMEM (1), Y signal
Address, RAS, CAS, WE
CS, ODT, CKE, memory clock
DATA, DQS

MY-118 (10/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_10

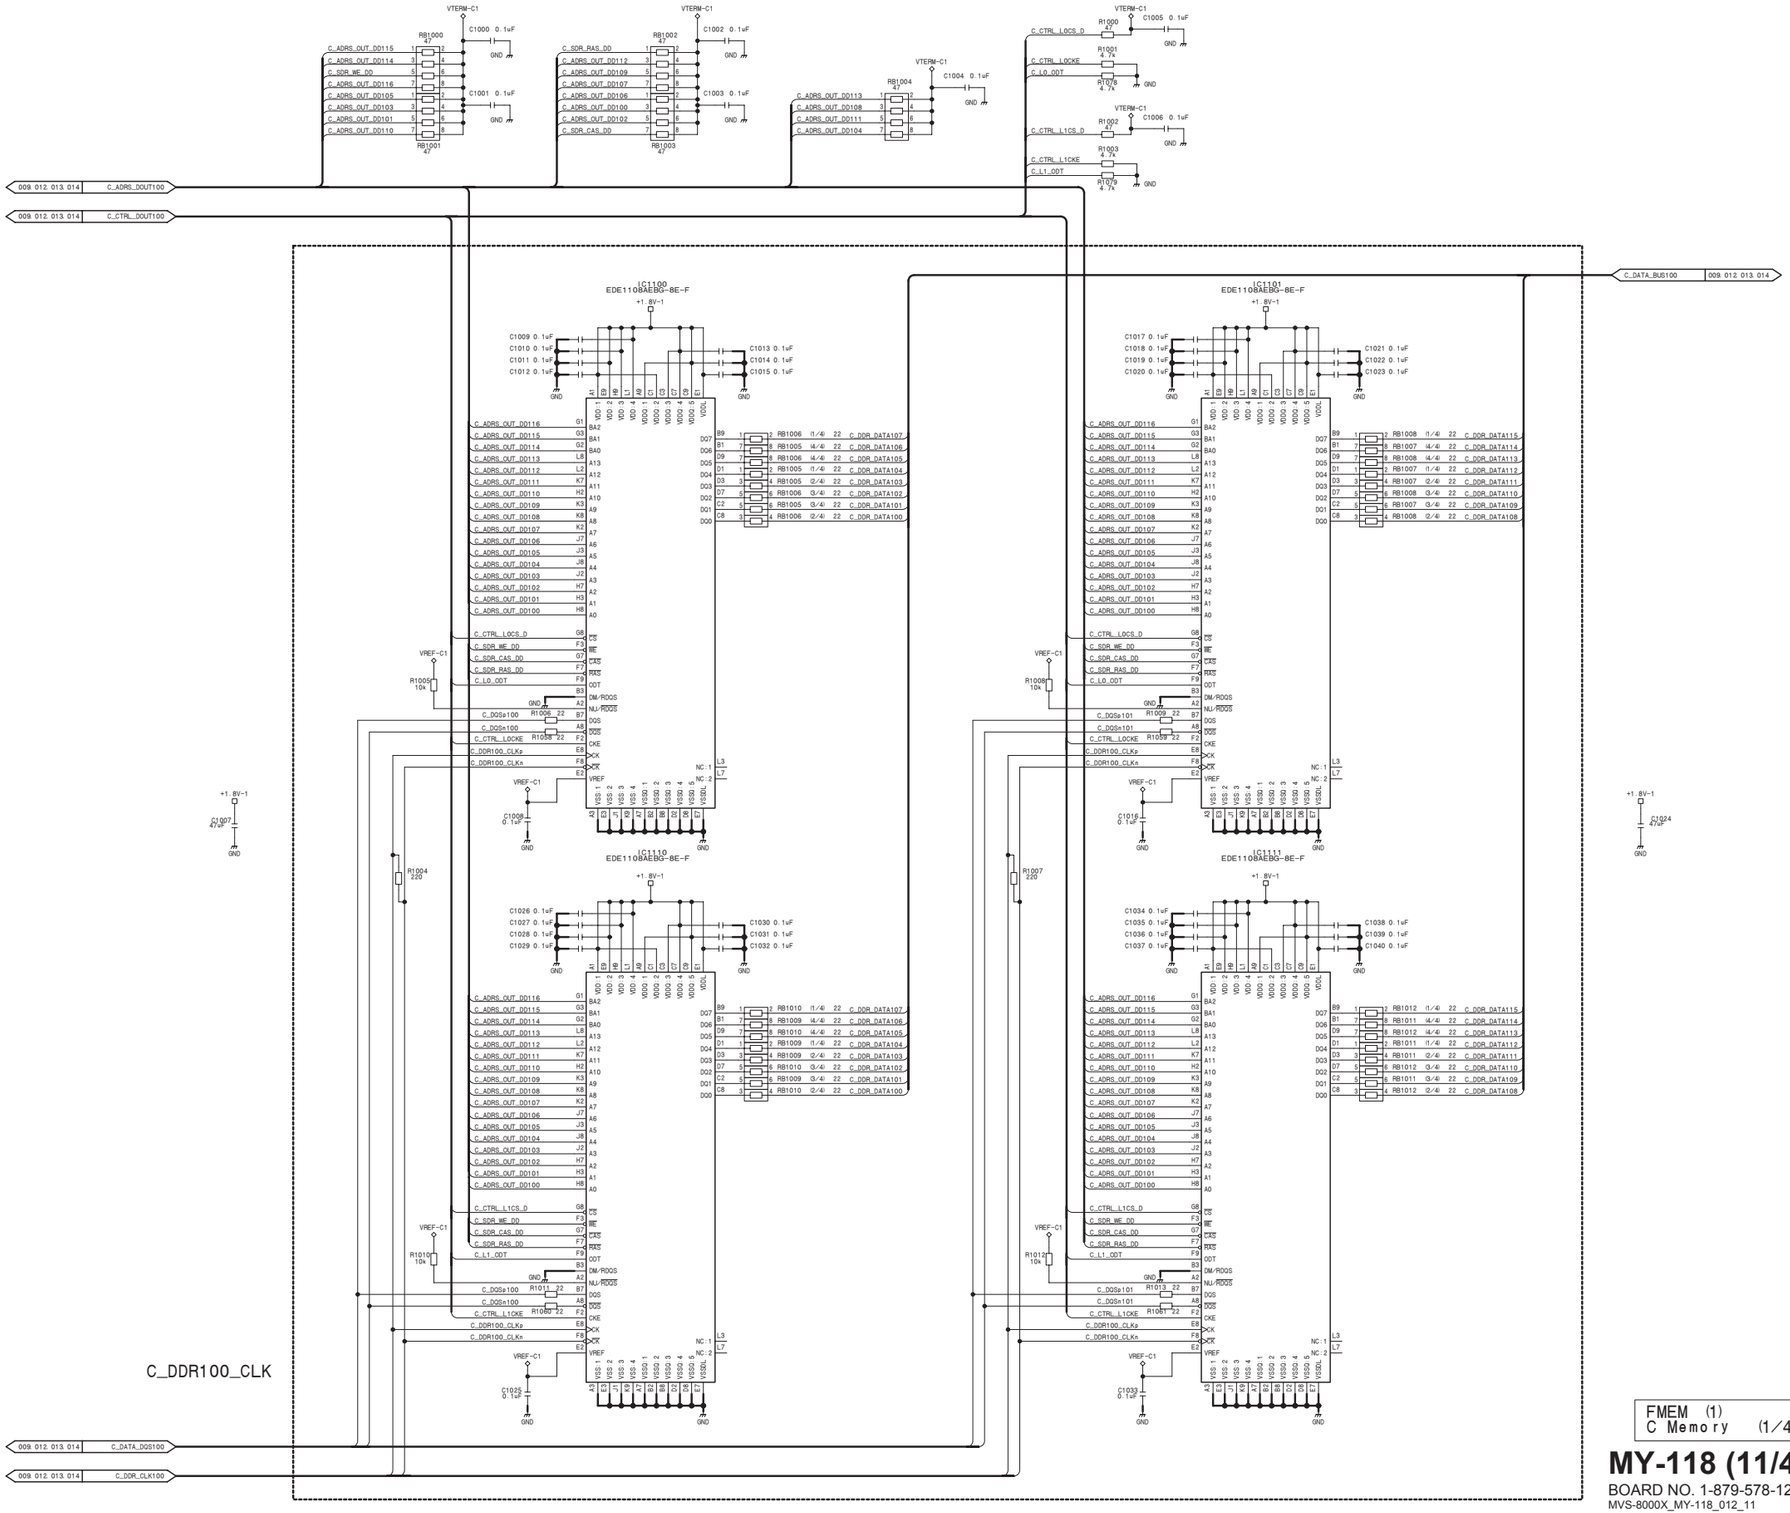

FMEM (1)
C Memory (1/4)

MY-118 (11/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_11

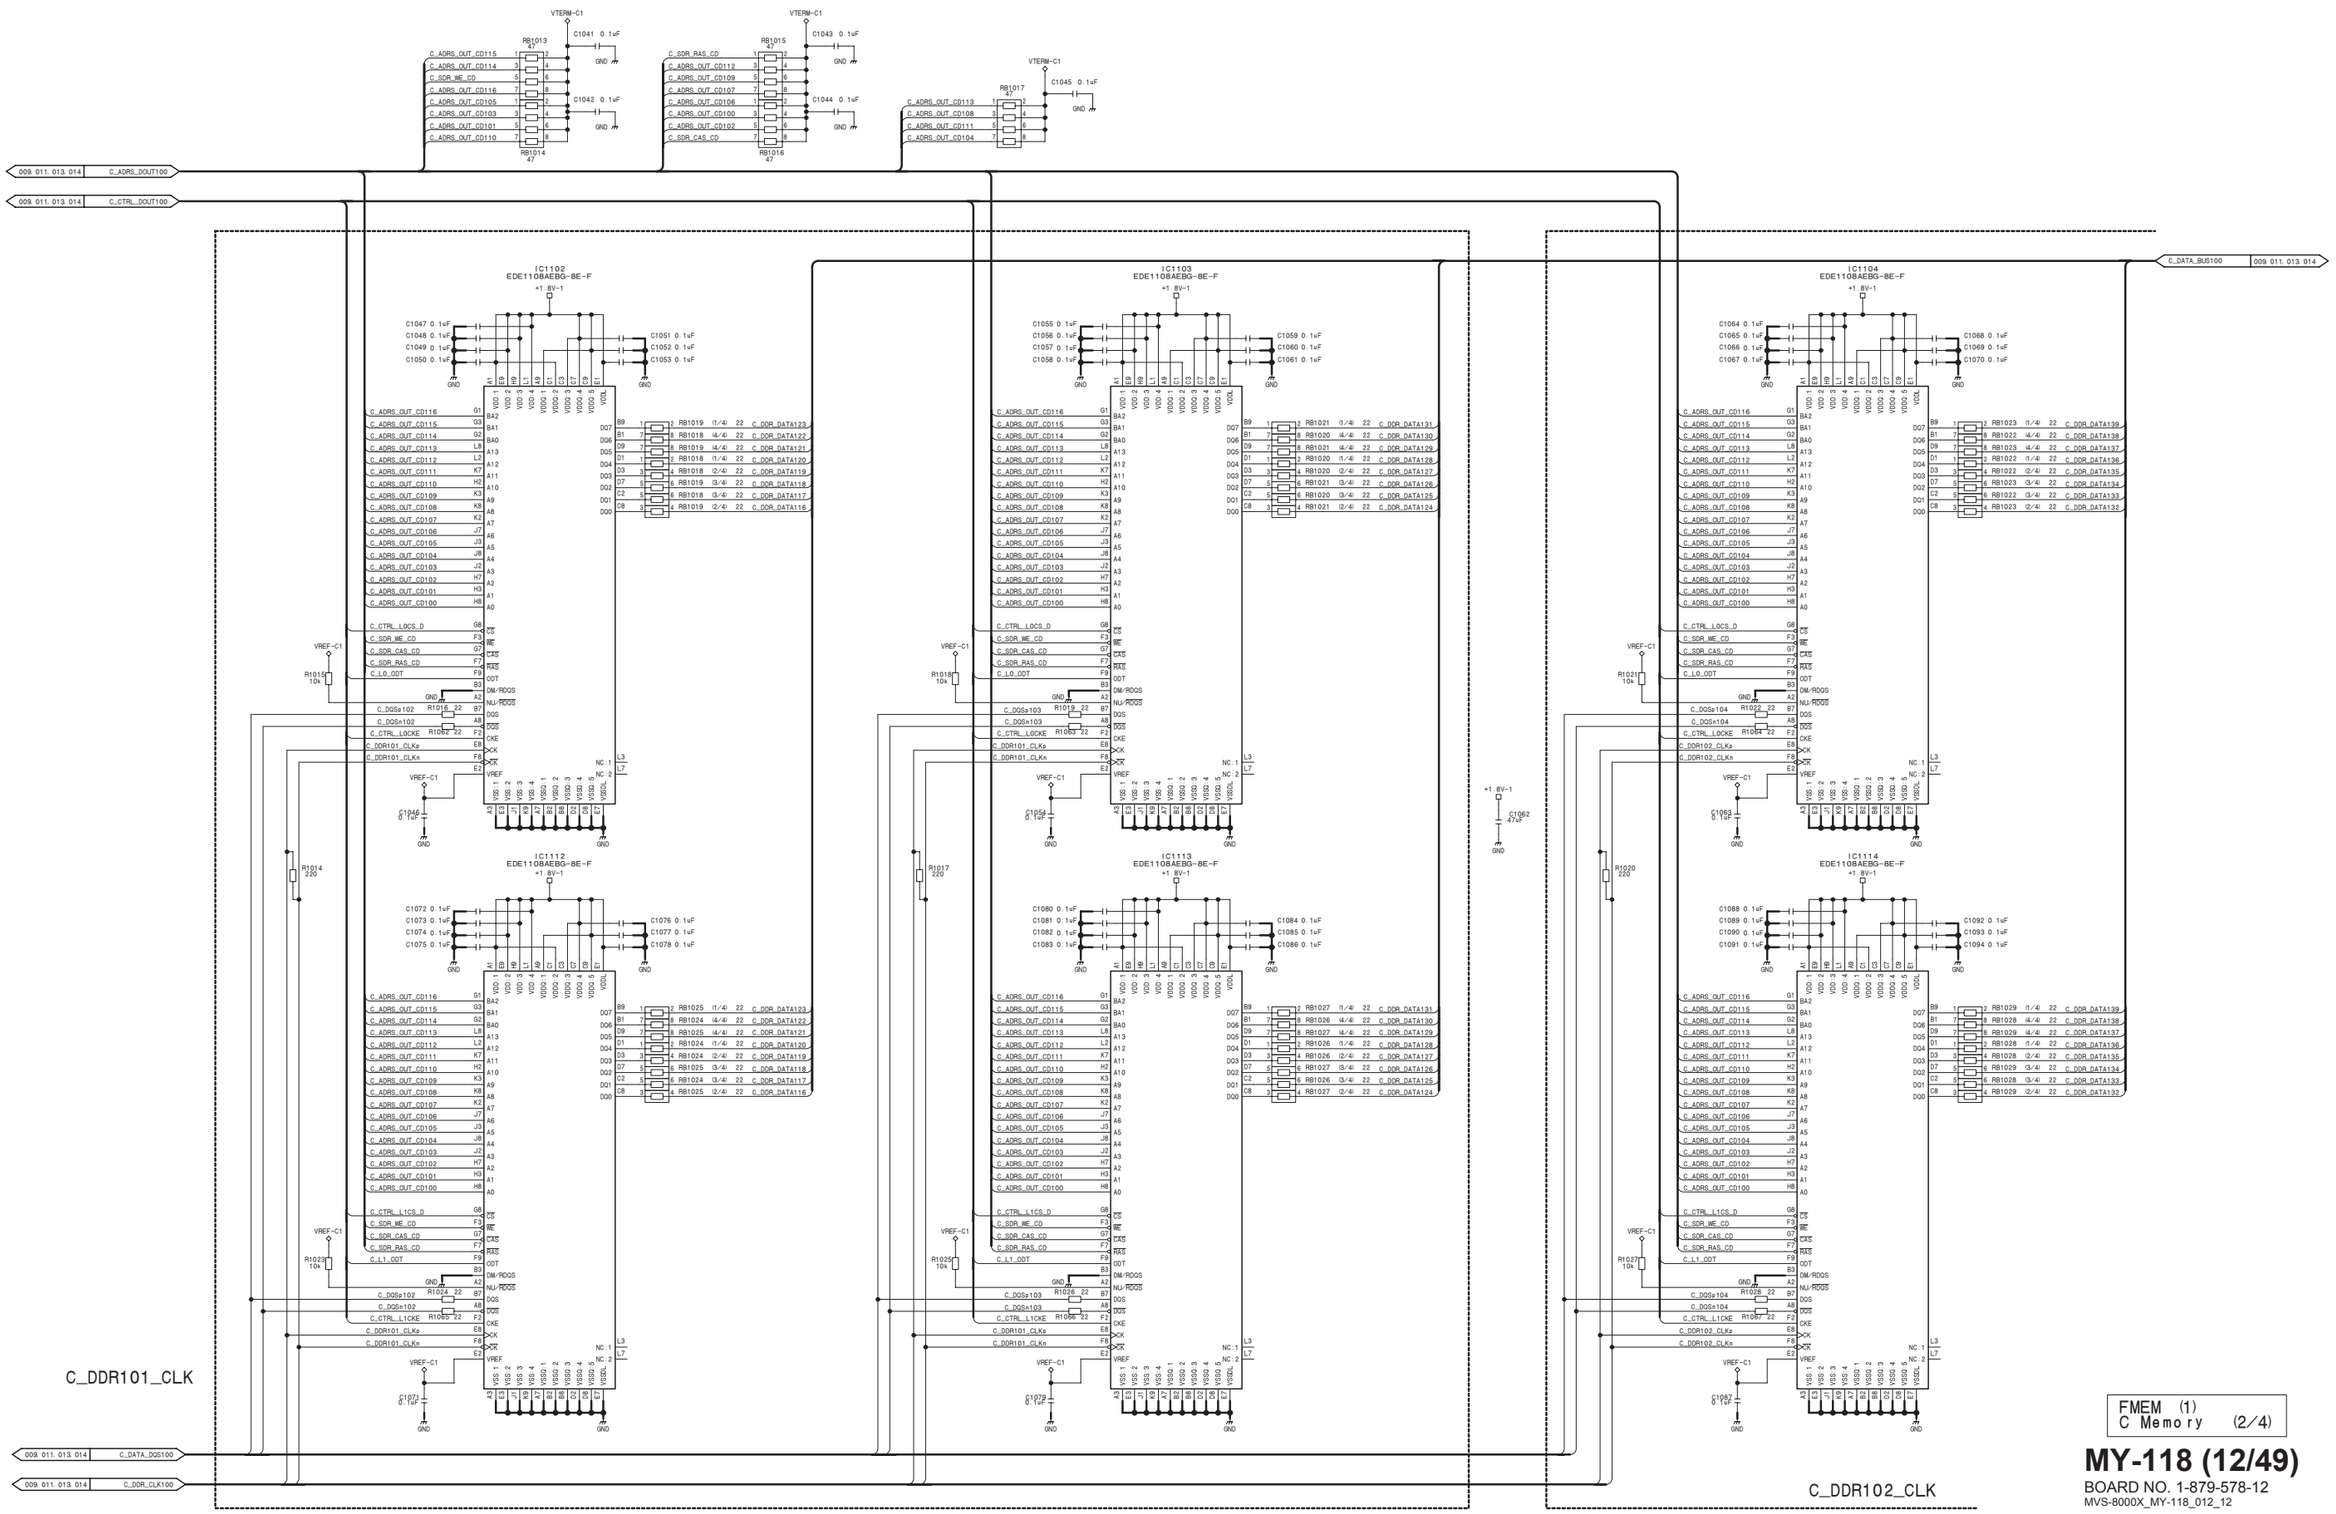

FMEM (1)
C Memory (2/4)

MY-118 (12/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_12

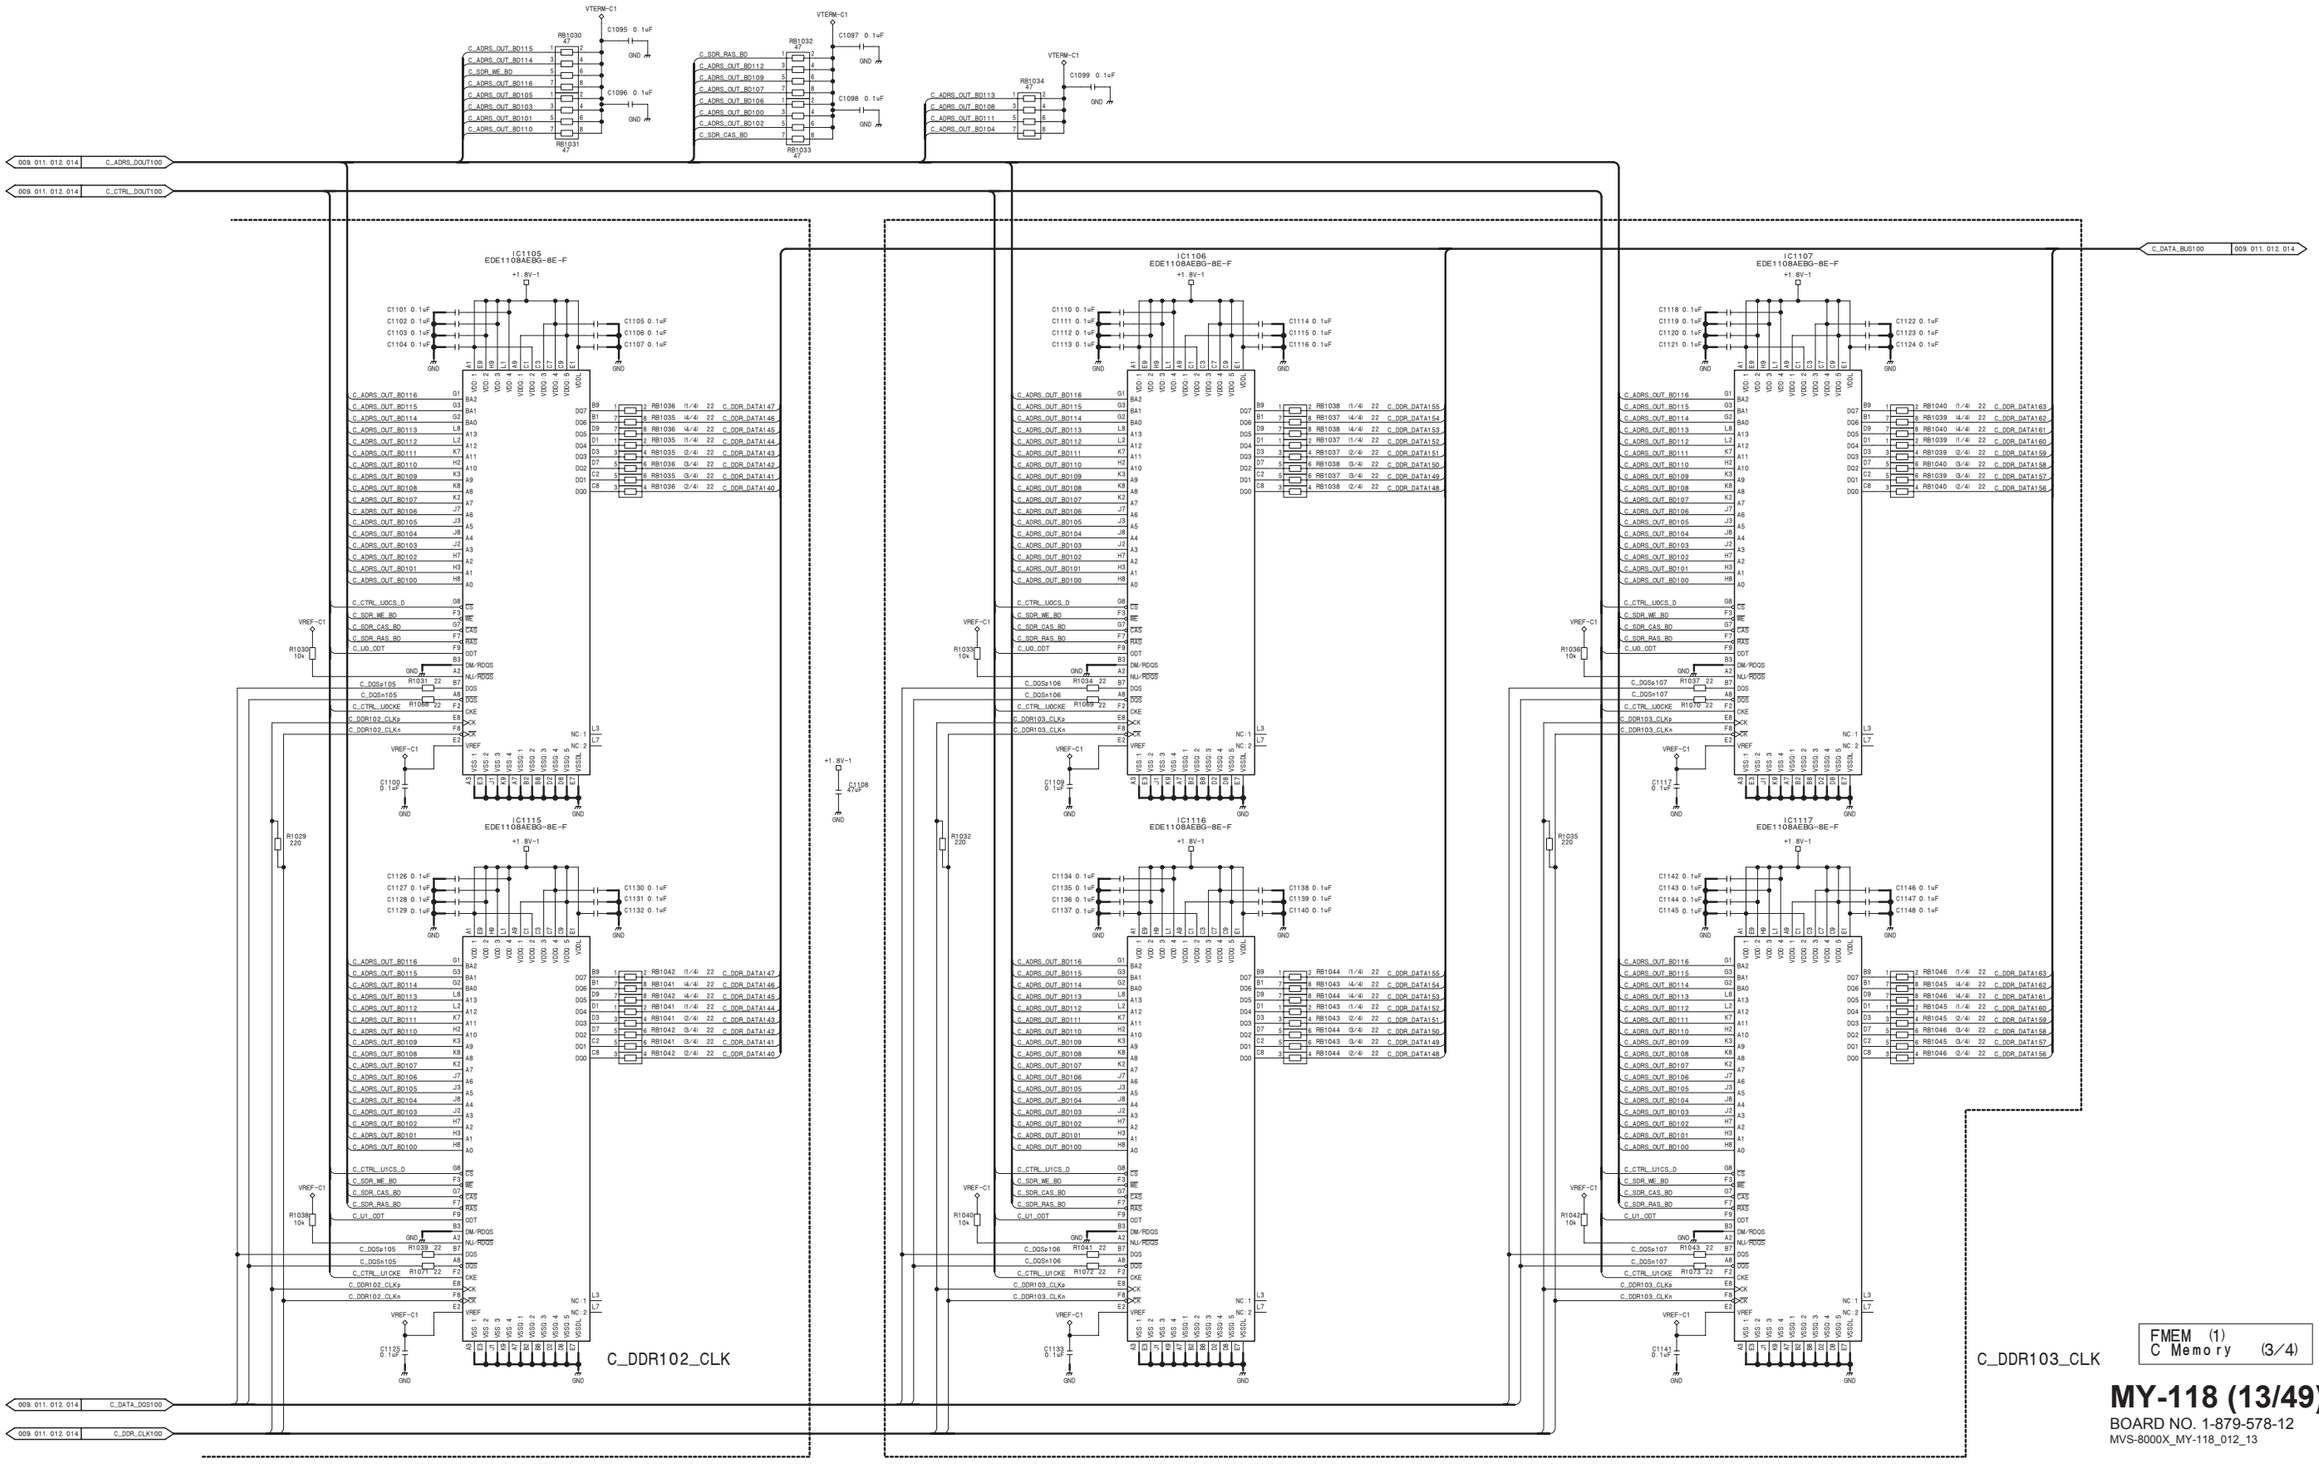

MY-118 (13/49)

BOARD NO. 1-879-578-12

MVS-8000X_MY-118_012_13

MY-118 (14/49)
SUFFIX: -12

MY-118 (14/49)
SUFFIX: -12

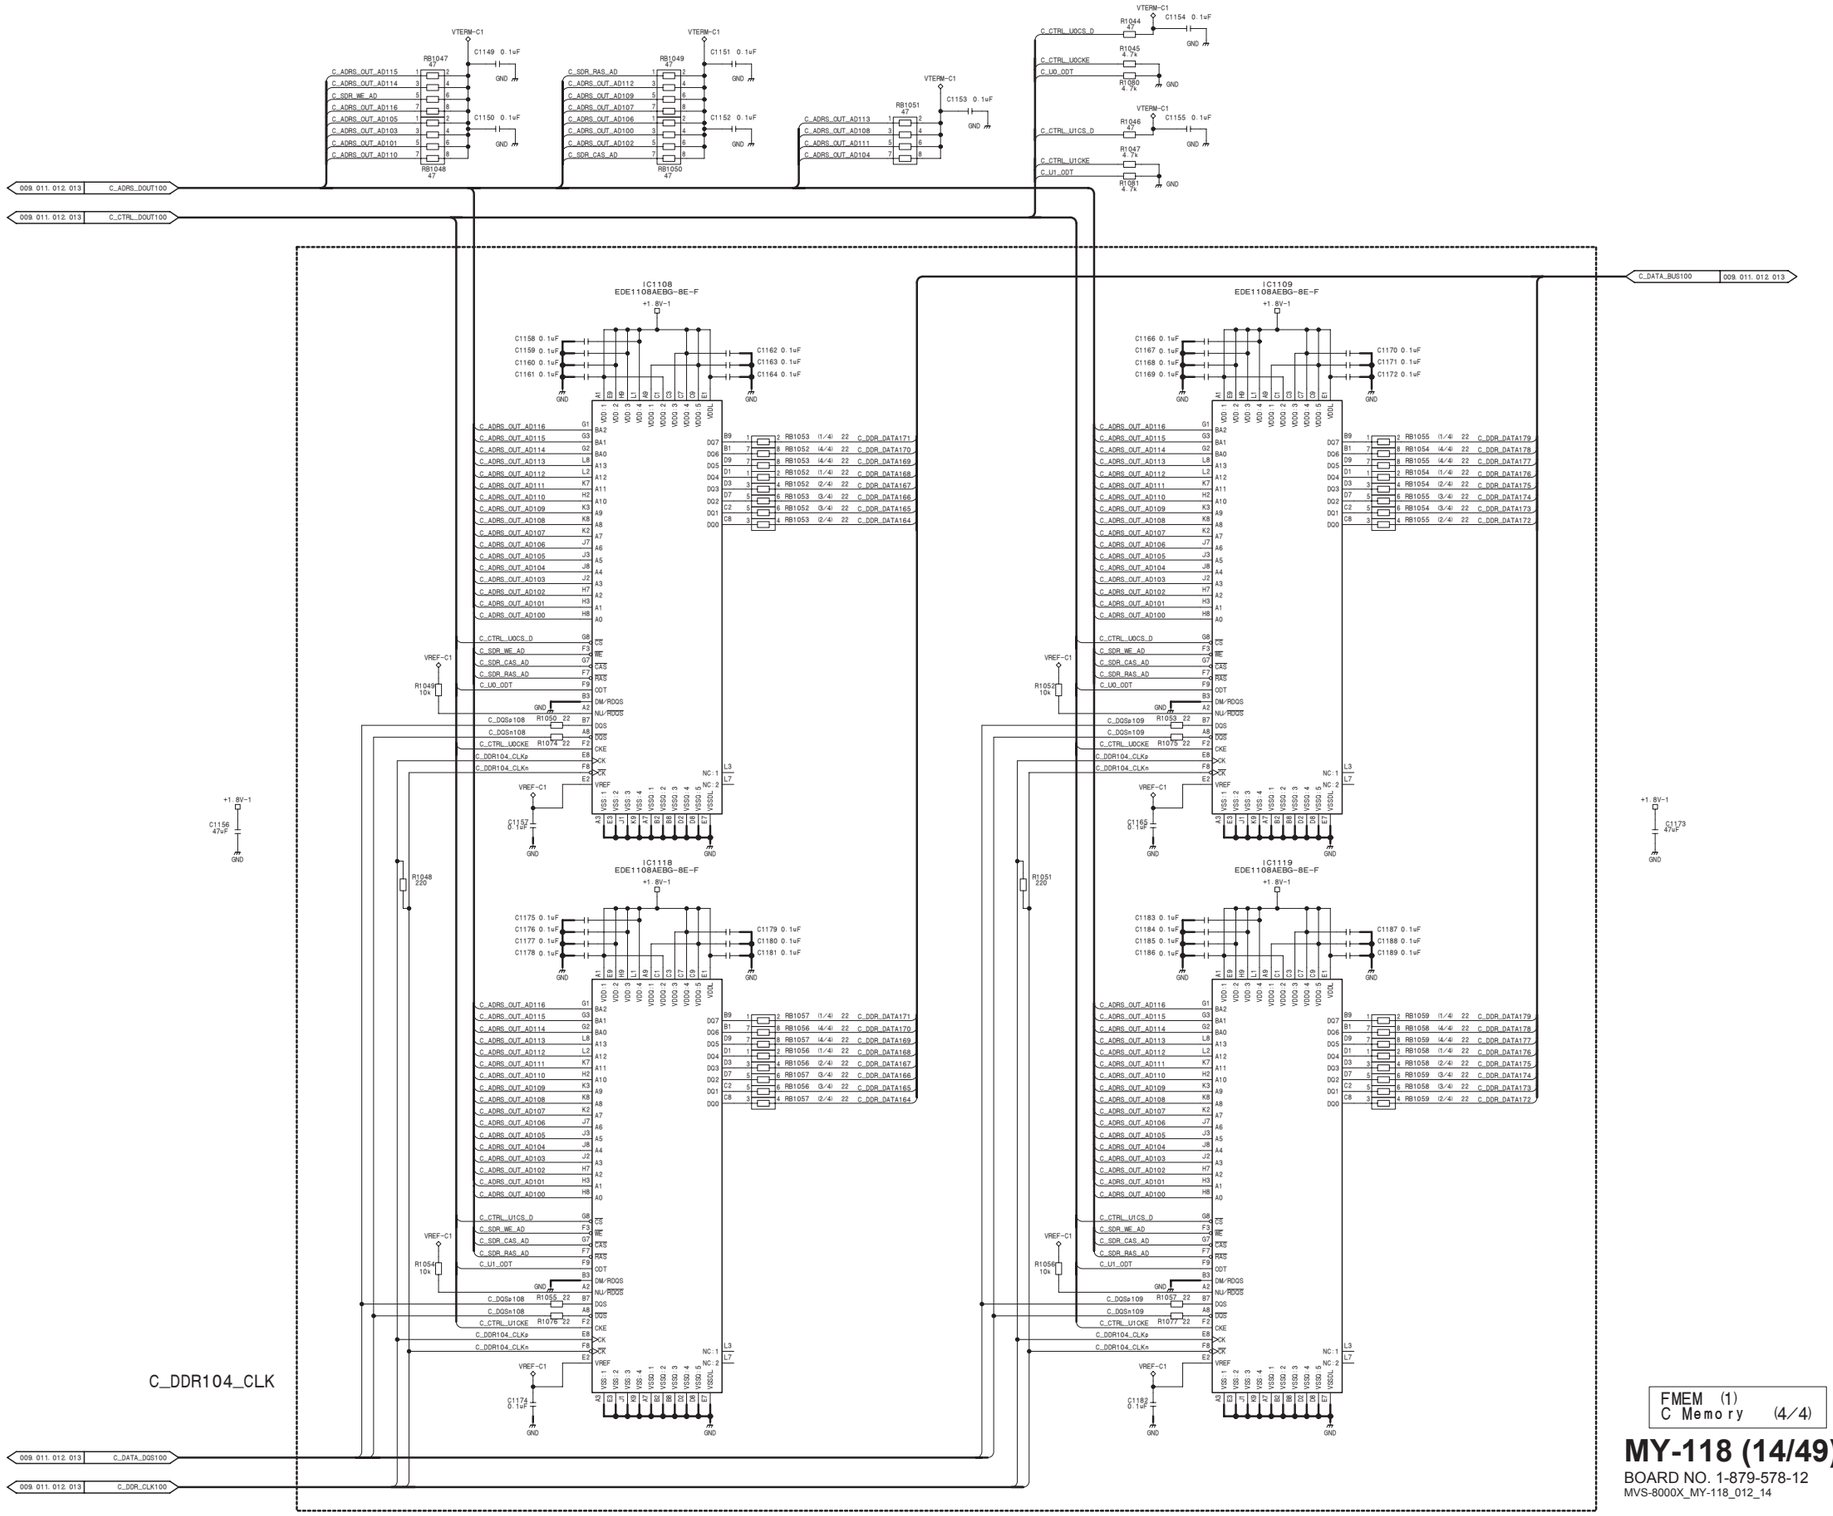

FMEM (1)
C Memory (4/4)

MY-118 (14/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_14

MY-118 (15/49)
SUFFIX: -12

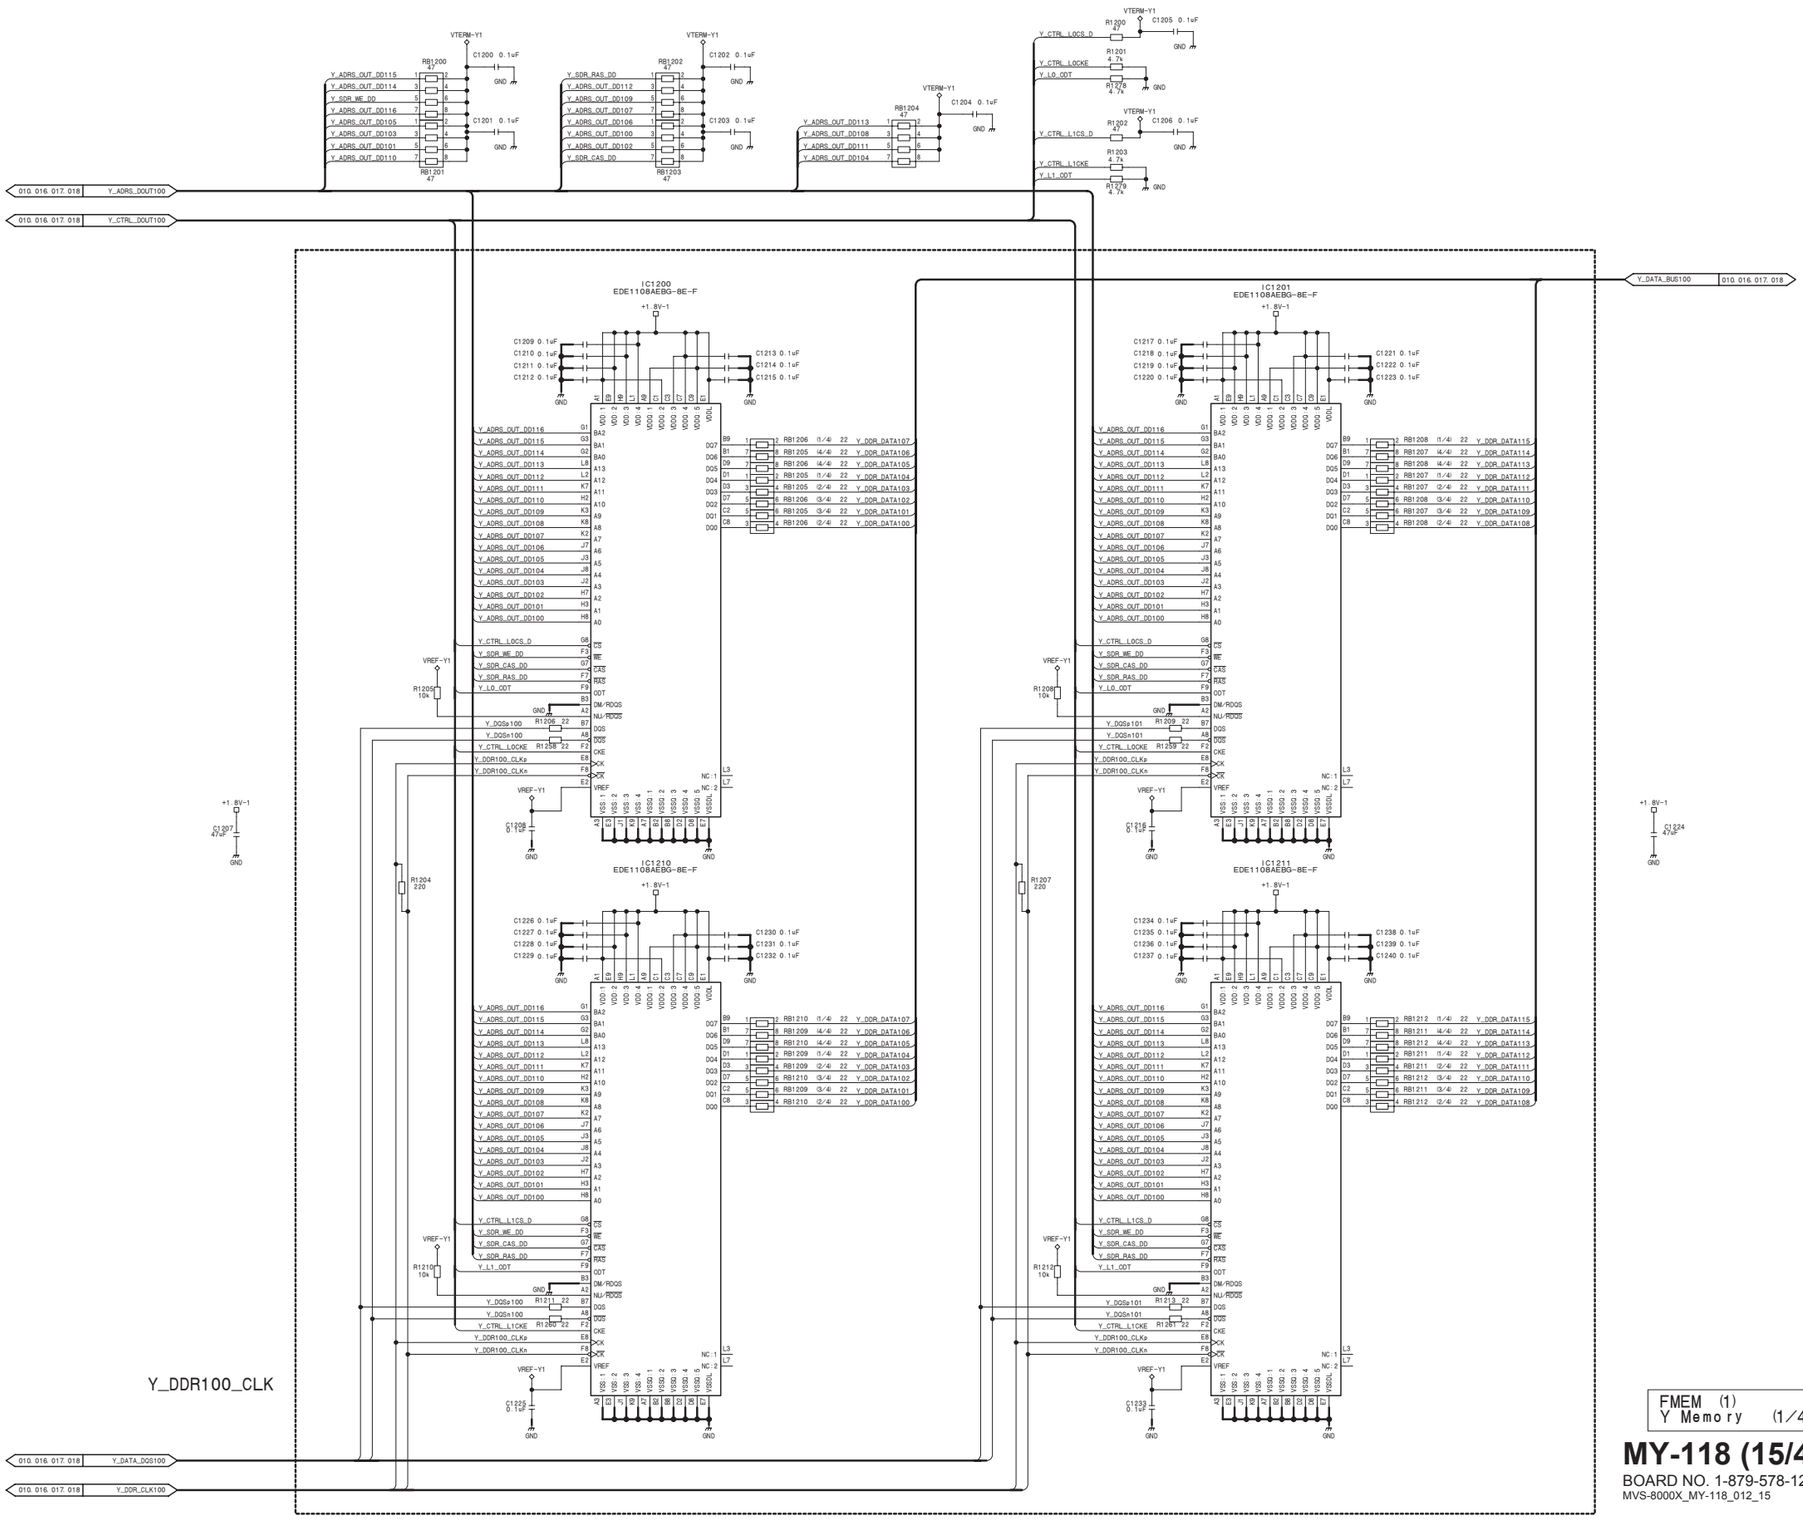

FMEM (1)
Y Memory (1/4)

MY-118 (15/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_15

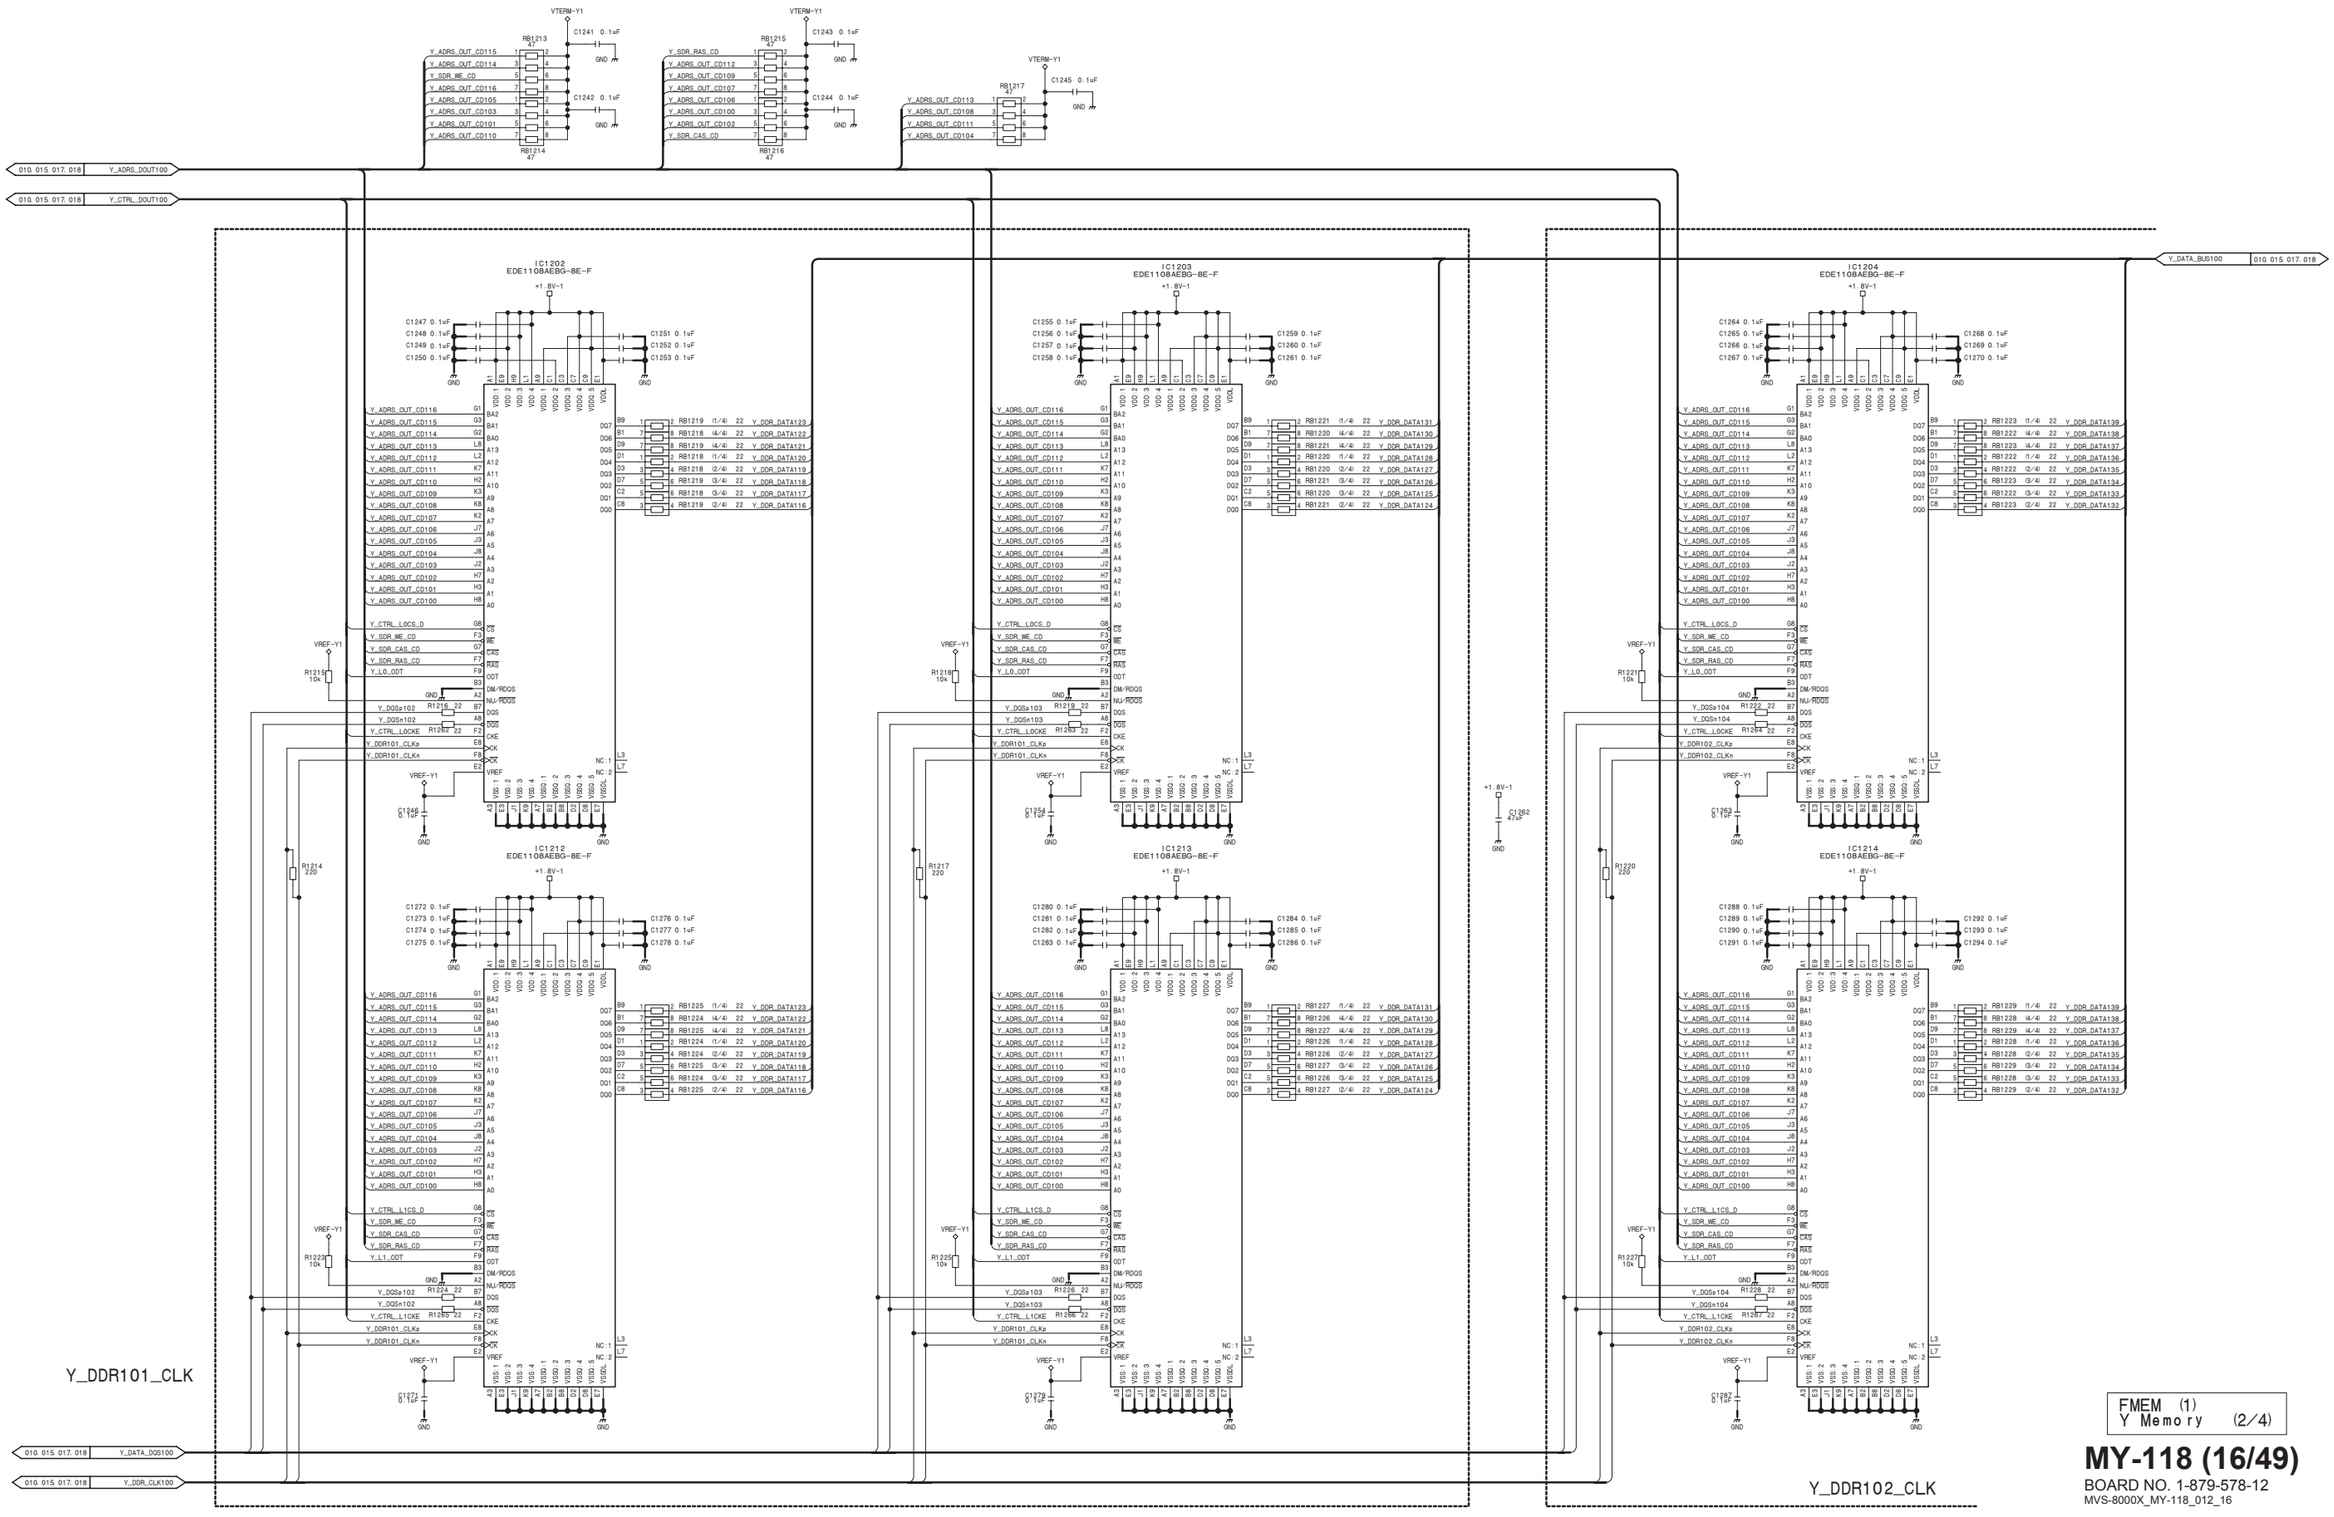

FMEM (1)
Y Memory (2/4)

MY-118 (16/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_16

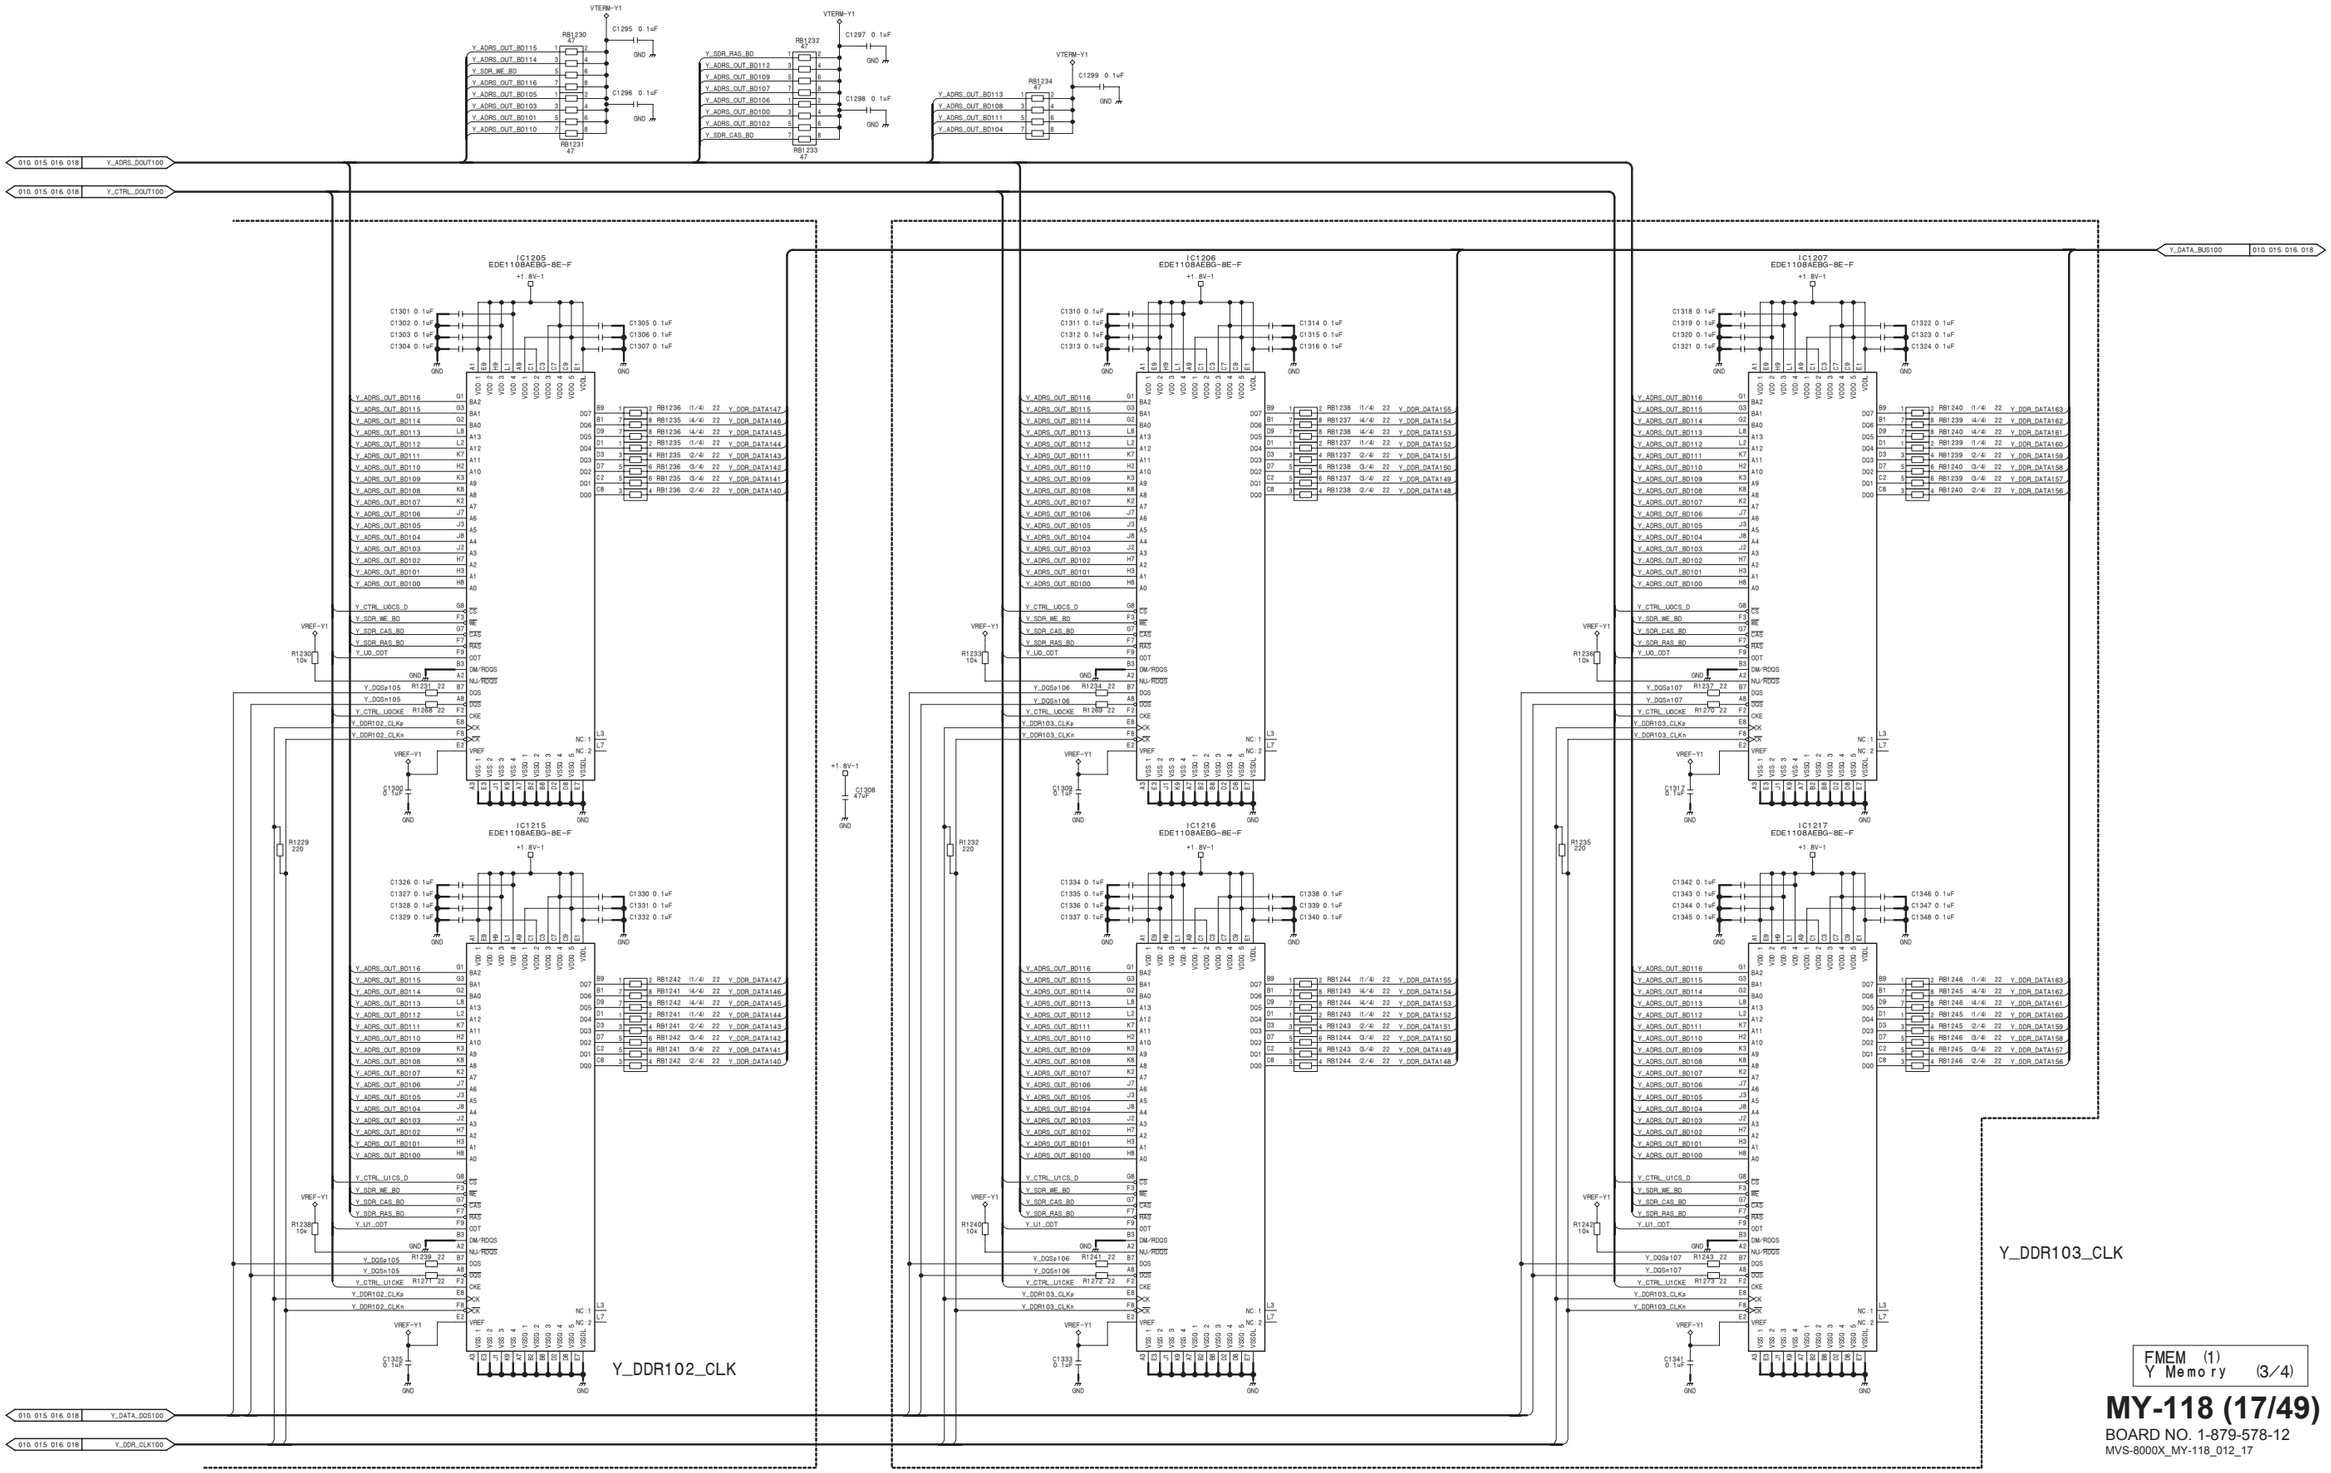

FMEM (1)
Y Memory (3/4)

MY-118 (17/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_17

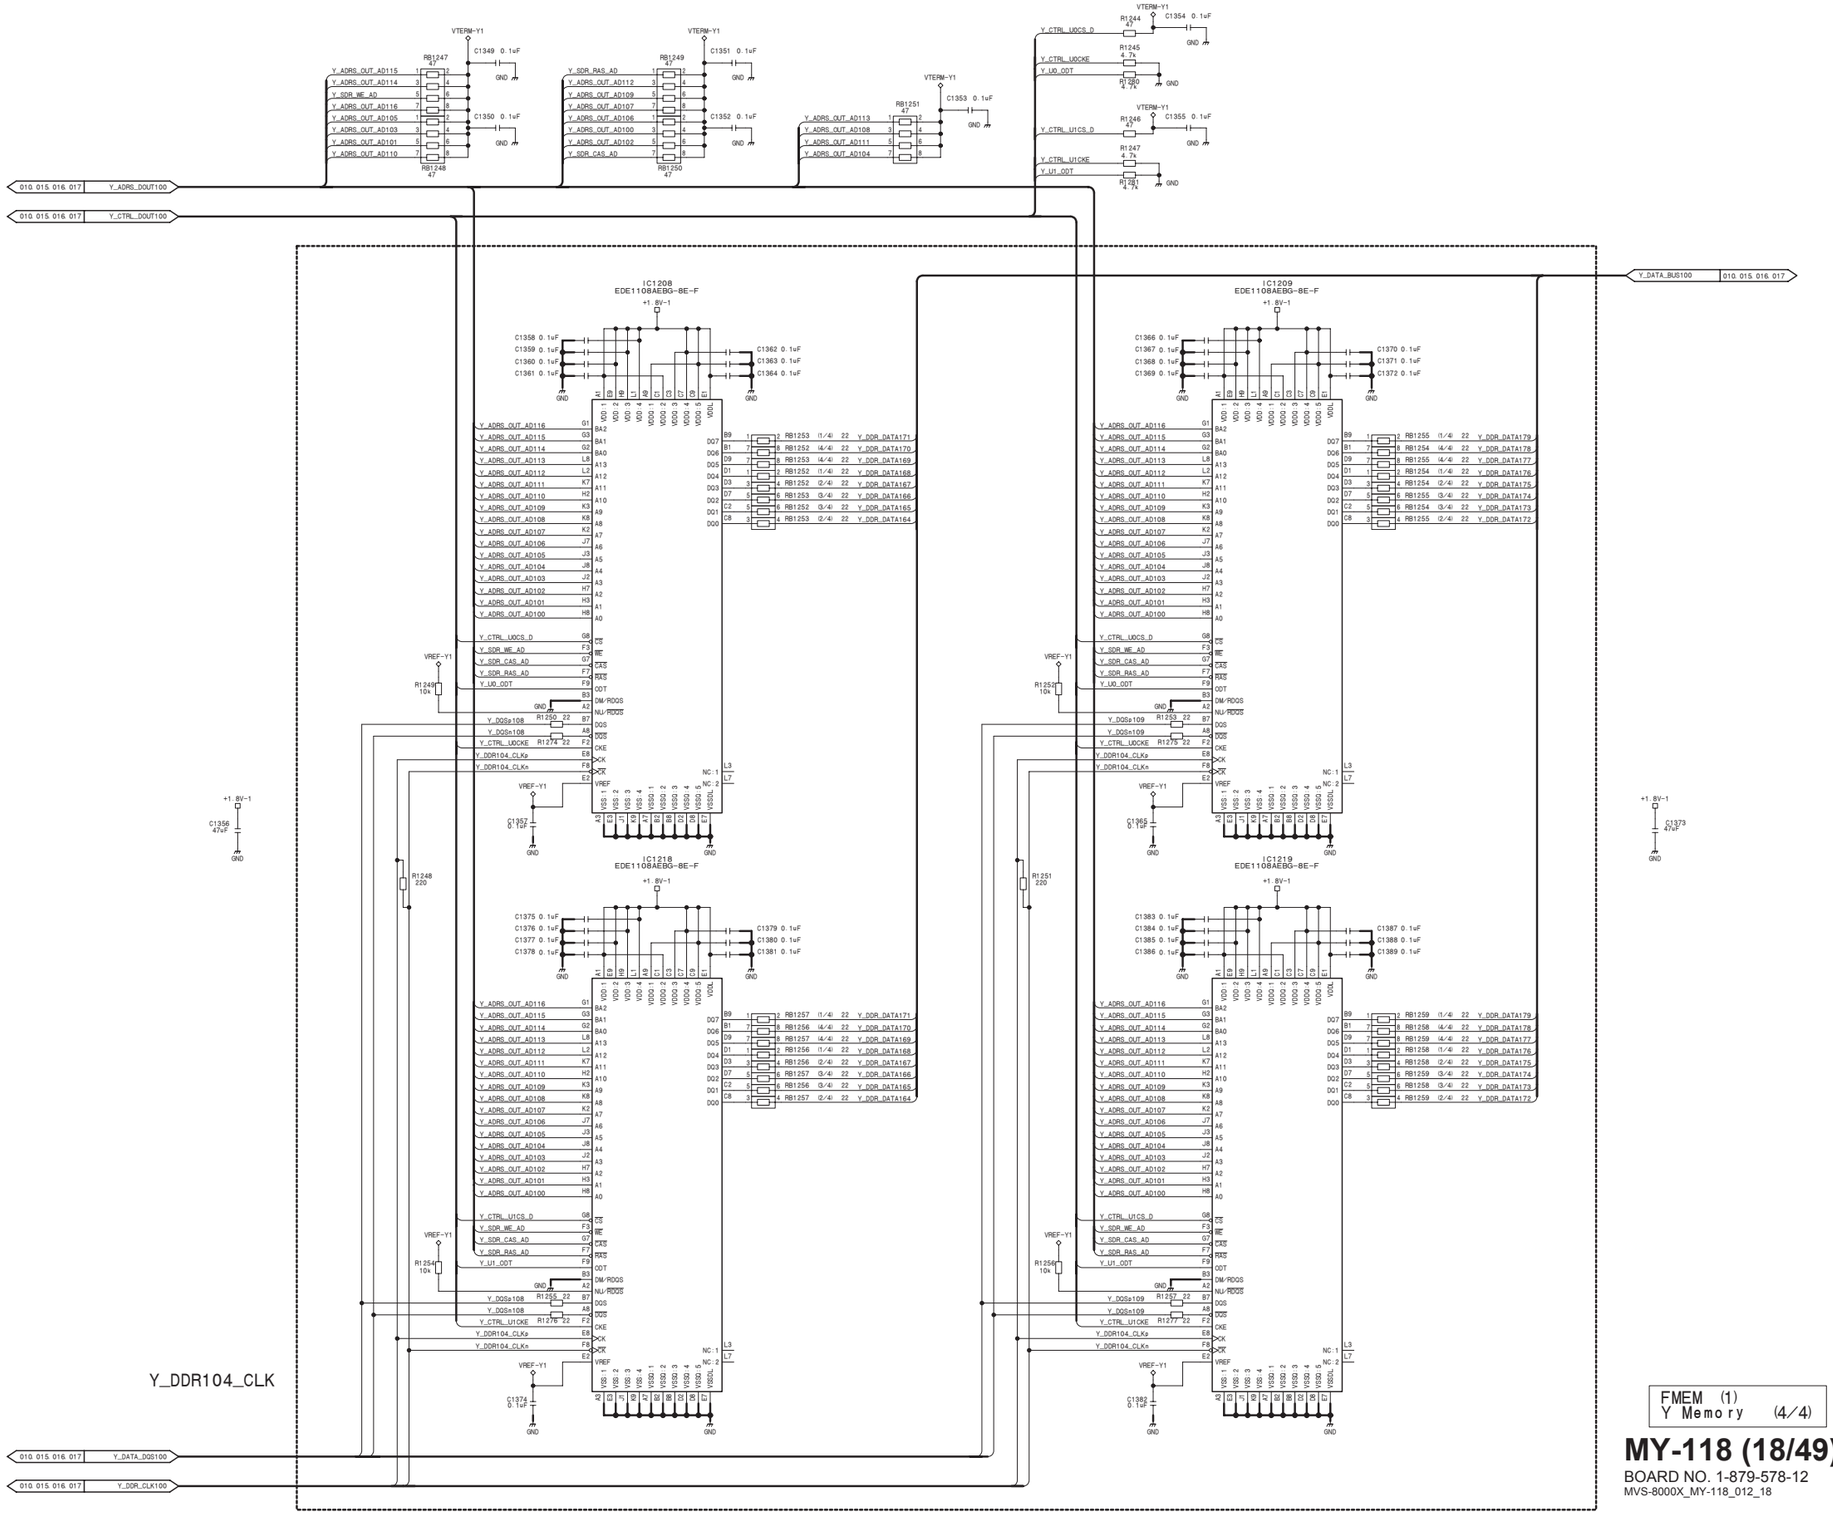

FMEM (1)
Y Memory (4/4)

MY-118 (18/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_18

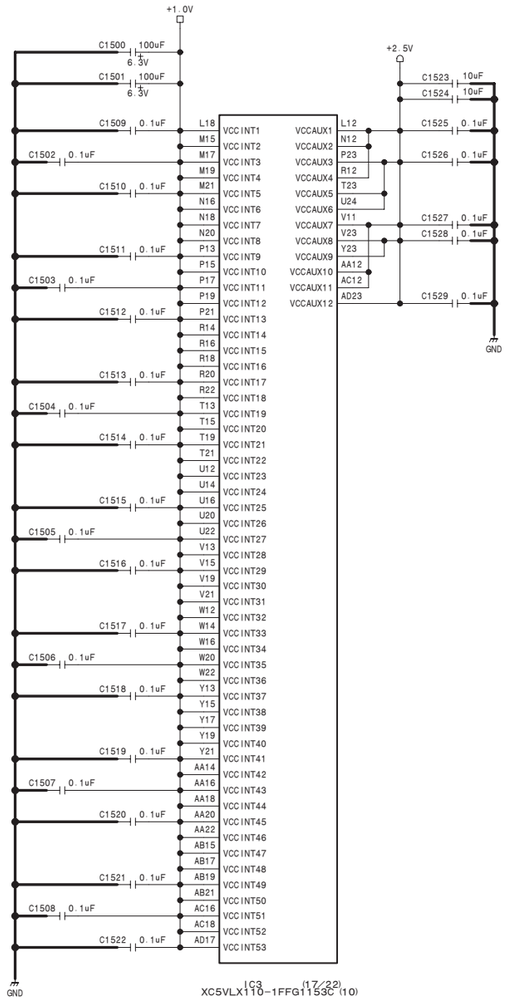

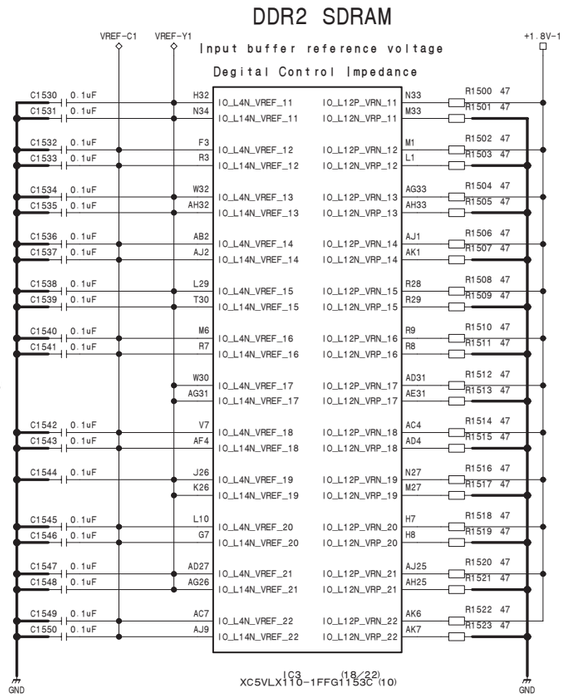

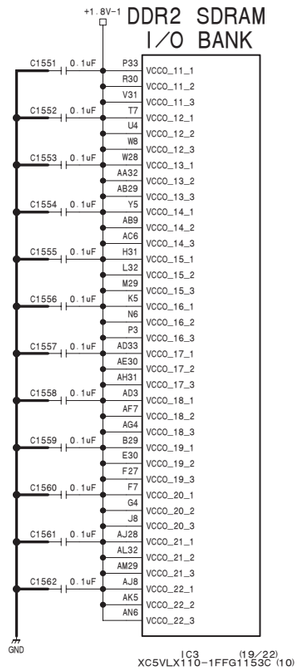

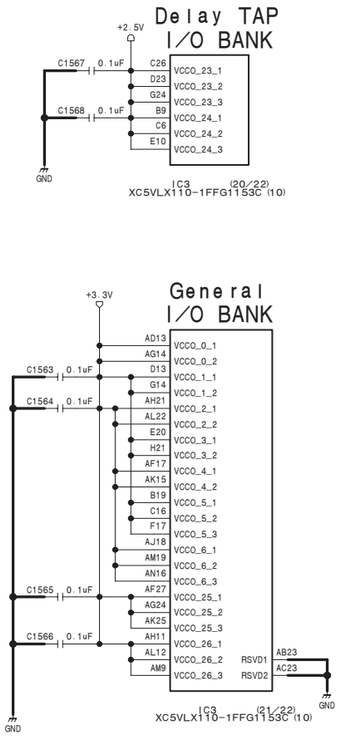

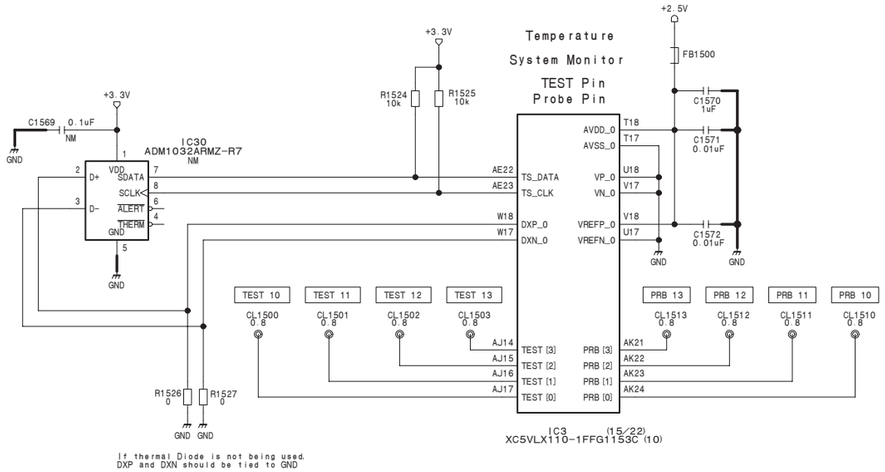

FMEM (1)
Vcc (INT, AUX, VREF, out)
DDR2 SDRAM Power & DCI
System Monitor

MY-118 (19/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_19

MY-118 (20/49)
SUFFIX: -12

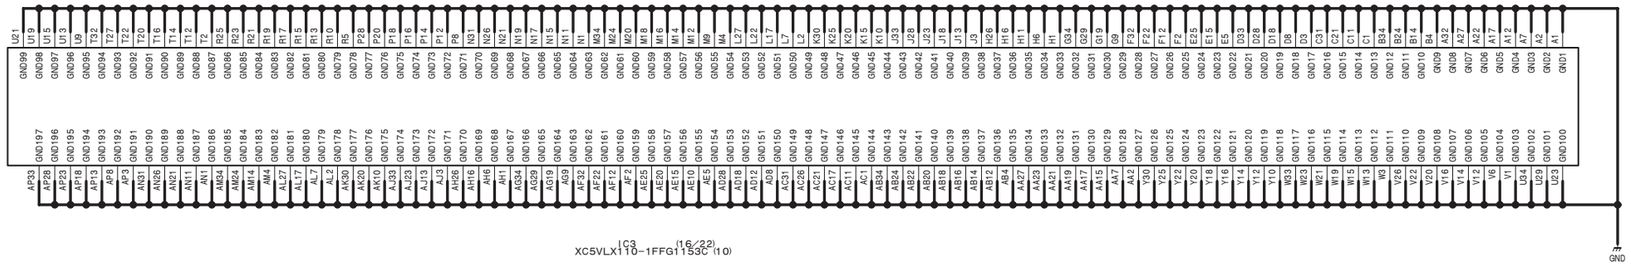

FMEM (1)
GND & Unused Pins

MY-118 (20/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_20

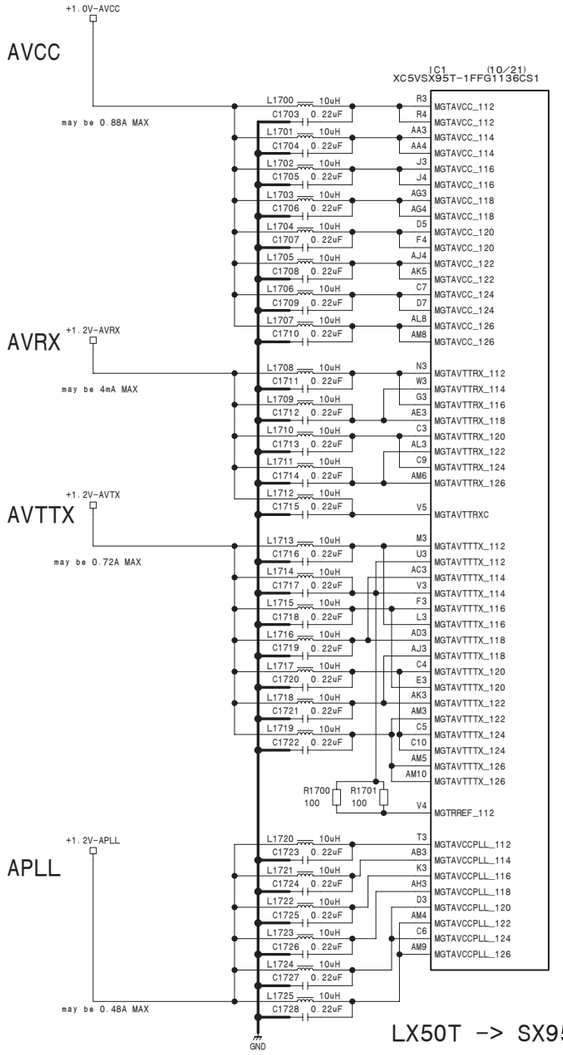

LX50T -> SX95T

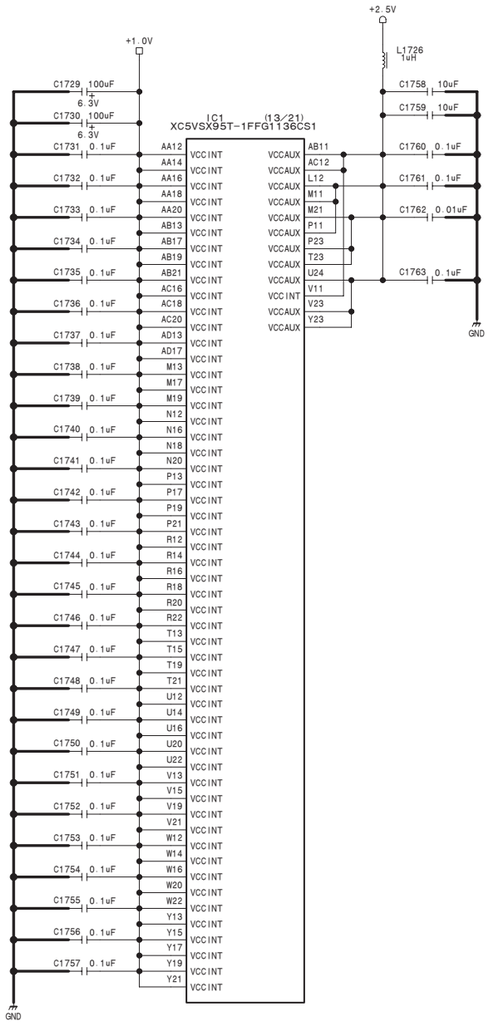

LX50T -> SX95T

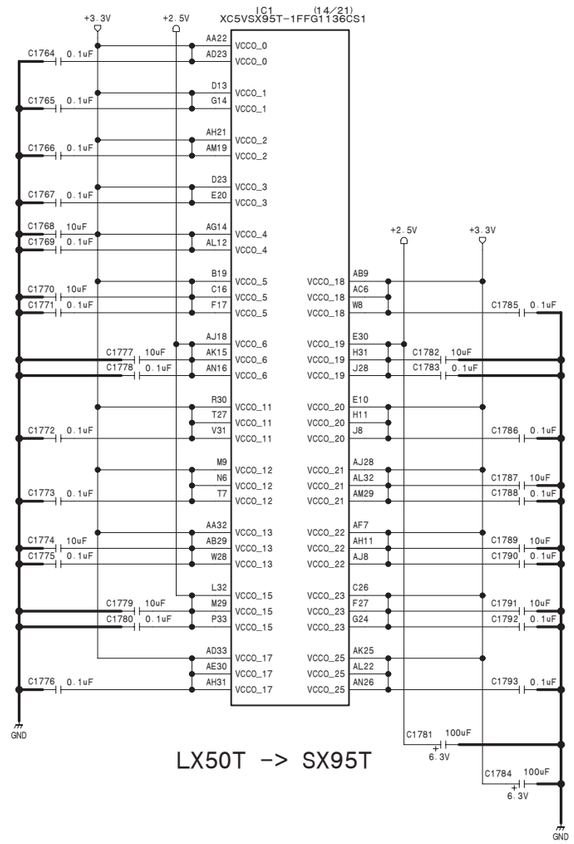

LX50T -> SX95T

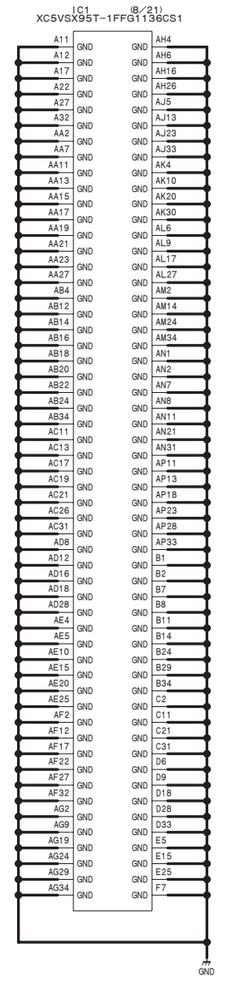

LX50T -> SX95T

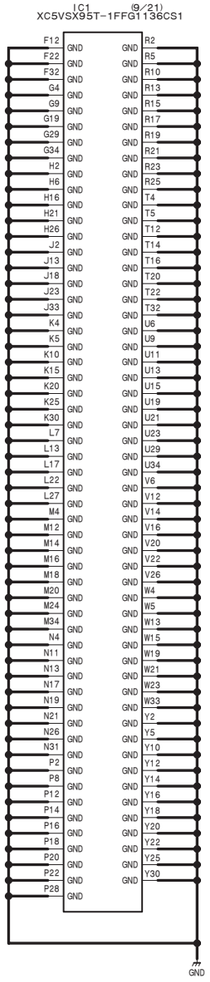

LX50T -> SX95T

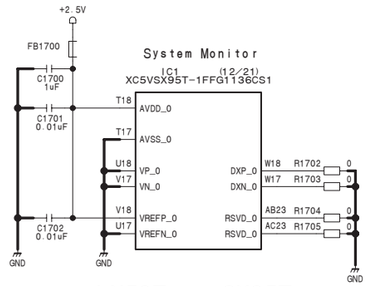

LX50T -> SX95T

LX50T -> SX95T

MFSDIx (1)
VCC. GND. System Monitor

MY-118 (21/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_21

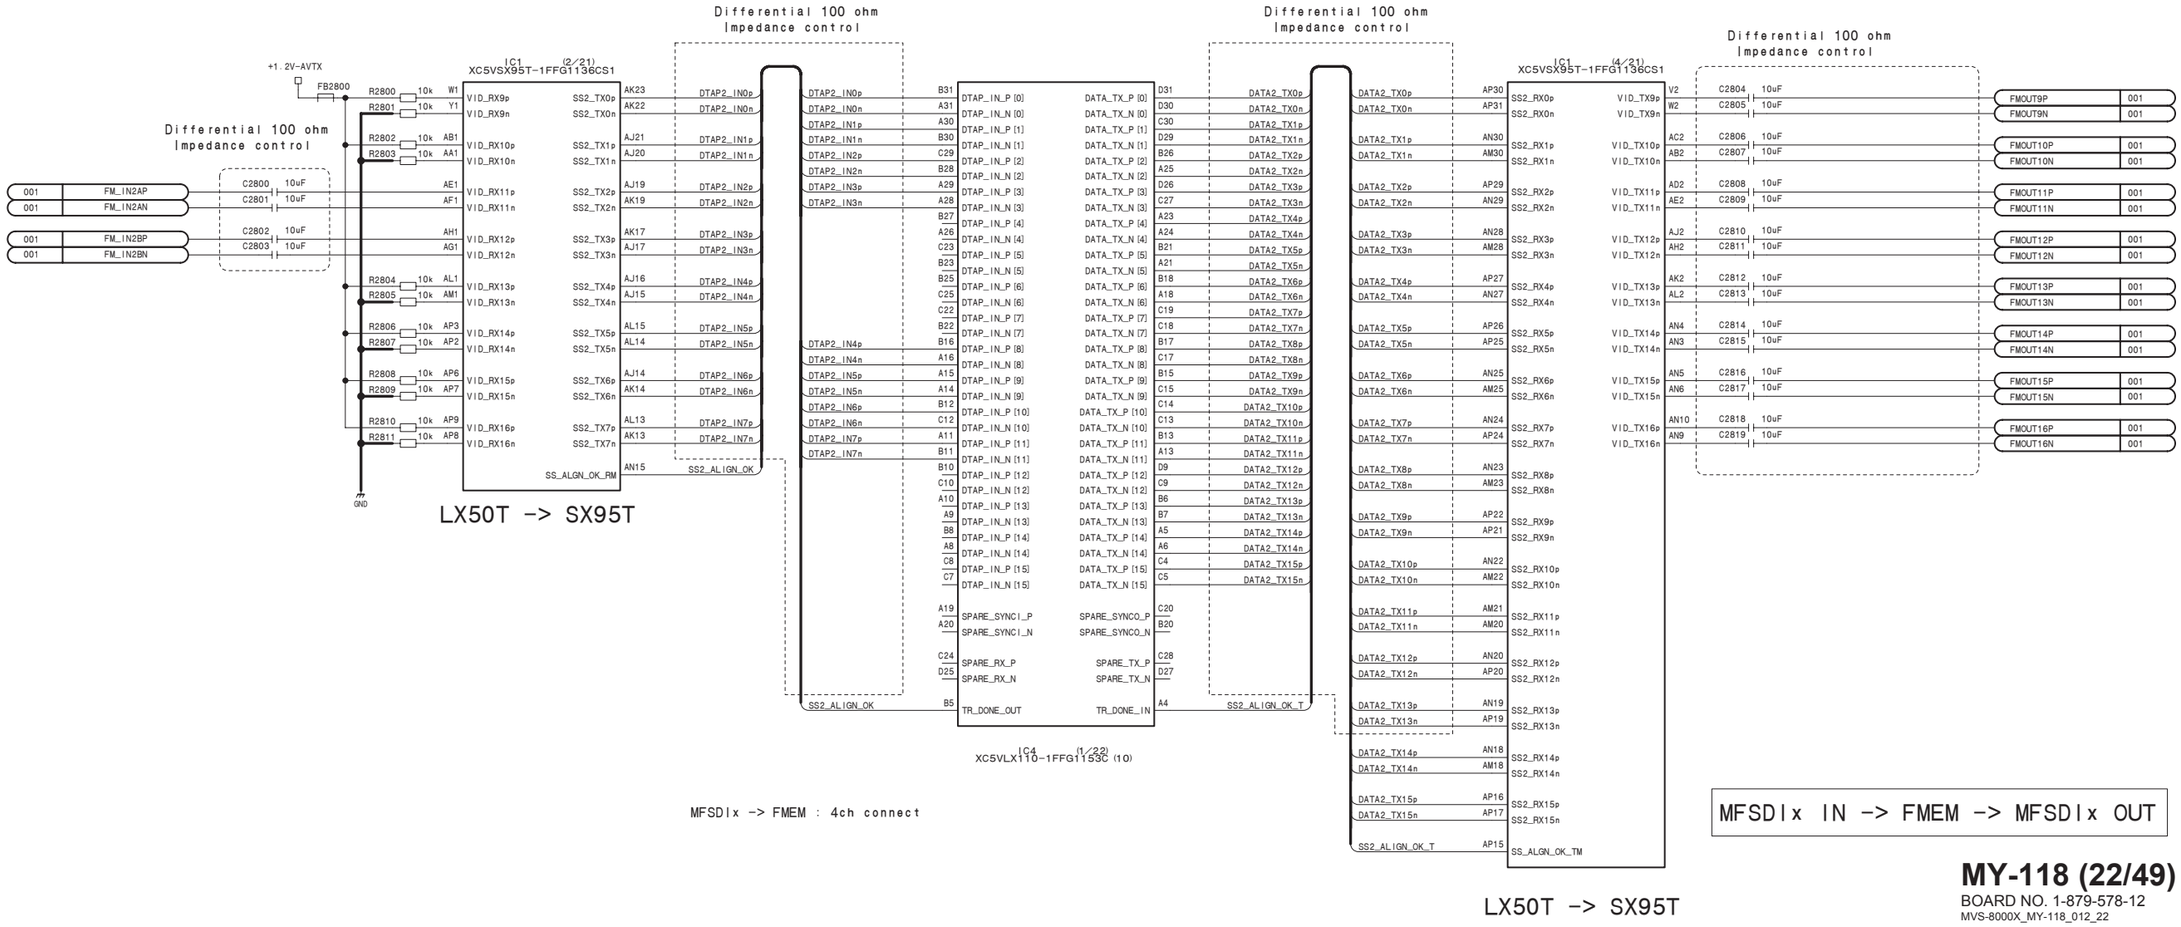

MFSDIx IN -> FMEM -> MFSDIx OUT

MY-118 (22/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_22

MY-118 (23/49)
SUFFIX: -12

IC1 (18/21)
XC5VSX95T-1FFG1136CS1

L20	IO_L0N_A18_1	IO_L0N_5	B15
L21	IO_L0P_A19_1	IO_L0P_5	B16
L16	IO_L1N_A16_1	IO_L10N_CC_5	E16
L15	IO_L1P_A17_1	IO_L10P_CC_5	E17
K21	IO_L2N_A14_D30_1	IO_L11N_CC_5	G21
J22	IO_L2P_A15_D31_1	IO_L11P_CC_5	F21
J15	IO_L3N_A12_D28_1	IO_L12N_VRP_5	D19
K16	IO_L3P_A13_D29_1	IO_L12P_VRN_5	E18
H22	IO_L4N_VREF_A10_D26_1	IO_L13N_5	D22
G22	IO_L4P_A11_D27_1	IO_L13P_5	D21
K14	IO_L5N_A8_D24_1	IO_L14N_VREF_5	G18
L14	IO_L5P_A9_D25_1	IO_L14P_5	F18
K22	IO_L6N_A6_D22_1	IO_L15N_5	F23
K23	IO_L6P_A7_D23_1	IO_L15P_5	E22
H12	IO_L7N_A4_D20_1	IO_L16N_5	F16
J12	IO_L7P_A5_D21_1	IO_L16P_5	G17
H23	IO_L8N_CC_A2_D18_1	IO_L17N_5	E23
G23	IO_L8P_CC_A3_D19_1	IO_L17P_5	D24
K12	IO_L9N_CC_A0_D16_1	IO_L18N_5	F15
K13	IO_L9P_CC_A1_D17_1	IO_L18P_5	F14
		IO_L19N_5	E24
AE12	IO_L0N_CC_RS0_2	IO_L19P_5	F24
AE13	IO_L0P_CC_RS1_2	IO_L1N_5	A14
AG23	IO_L1N_CC_A24_2	IO_L1P_5	A15
AF23	IO_L1P_CC_A25_2	IO_L2N_5	A16
AG12	IO_L2N_A22_2	IO_L2P_5	B17
AF13	IO_L2P_A23_2	IO_L3N_5	C15
AE23	IO_L3N_A20_2	IO_L3P_5	C14
AE22	IO_L3P_A21_2	IO_L4N_VREF_5	F19
AF14	IO_L4N_VREF_FOE_B_MOSI_2	IO_L4P_5	E19
AE14	IO_L4P_FCS_B_2	IO_L5N_5	D17
AF20	IO_L5P_FWE_B_2	IO_L5P_5	C17
		IO_L6P_5	E21
H18	IO_L0N_CC_GC_3	IO_L7N_5	D15
H17	IO_L0P_CC_GC_3	IO_L7P_5	D16
L18	IO_L1N_CC_GC_3	IO_L8N_CC_5	F20
K17	IO_L1P_CC_GC_3	IO_L8P_CC_5	G20
G16	IO_L2N_GC_VRP_3	IO_L9N_CC_5	E14
G15	IO_L2P_GC_VRN_3	IO_L9P_CC_5	D14
J19	IO_L3N_GC_3		
K18	IO_L3P_GC_3	IO_L0N_6	AJ24
J17	IO_L4N_GC_VREF_3	IO_L0P_6	AH24
J16	IO_L4P_GC_3	IO_L10N_CC_6	AL16
K19	IO_L5N_GC_3	IO_L10P_CC_6	AK16
L19	IO_L5P_GC_3	IO_L11N_CC_6	AK21
H15	IO_L6N_GC_3	IO_L11P_CC_6	AL21
H14	IO_L6P_GC_3	IO_L13N_6	AL20
J21	IO_L7N_GC_3	IO_L13P_6	AL19
J20	IO_L7P_GC_3	IO_L14N_VREF_6	AL18
H13	IO_L8N_GC_3	IO_L14P_6	AK18
J14	IO_L8P_GC_3	IO_L16N_6	AM16
		IO_L16P_6	AM15
AG22	IO_L0P_GC_D15_4	IO_L19N_6	AN17
AG13	IO_L1N_GC_D12_4	IO_L19P_6	AM17
AH12	IO_L1P_GC_D13_4	IO_L1N_6	AJ12
AH19	IO_L2N_GC_D10_4	IO_L1P_6	AK12
AH13	IO_L3N_GC_D8_4	IO_L2N_6	AJ22
AH14	IO_L3P_GC_D9_4	IO_L2P_6	AH23
AG20	IO_L4N_GC_VREF_4	IO_L4N_VREF_6	AL23
AG21	IO_L4P_GC_4	IO_L4P_6	AK24
AG15	IO_L5N_GC_4		
AH15	IO_L5P_GC_4		
AF19	IO_L6N_GC_4		
AG18	IO_L6P_GC_4		
AG16	IO_L7N_GC_VRP_4		
AH17	IO_L7P_GC_VRN_4		
AE18	IO_L8N_CC_GC_4		
AF18	IO_L8P_CC_GC_4		
AG17	IO_L9N_CC_GC_4		
AH18	IO_L9P_CC_GC_4		

IC1 (19/21)
XC5VSX95T-1FFG1136CS1

N32	IO_L15N_SM13N_11	IO_L10N_CC_15	P30
P32	IO_L15P_SM13P_11	IO_L10P_CC_15	P31
U31	IO_L14P_15	IO_L11N_CC_15	N30
U32	IO_L19N_SM9N_11	IO_L11P_CC_15	M31
D32	IO_L2N_11	IO_L12N_VRP_15	R29
C32	IO_L2P_11	IO_L12P_VRN_15	R28
H32	IO_L4N_VREF_11	IO_L13N_15	R31
G32	IO_L4P_11	IO_L13P_15	T31
		IO_L14N_VREF_15	T30
M5	IO_L0N_12	IO_L16N_15	U30
M6	IO_L0P_12	IO_L16P_15	U28
U7	IO_L10N_CC_12	IO_L18P_15	U27
T8	IO_L10P_CC_12	IO_L17N_15	R27
J7	IO_L11N_CC_12	IO_L17P_15	R26
H7	IO_L11P_CC_12	IO_L18N_15	T26
P9	IO_L12N_VRP_12	IO_L19P_15	U26
R9	IO_L12P_VRN_12	IO_L19N_15	T25
G5	IO_L13N_12	IO_L18N_12	U25
H5	IO_L13P_12	IO_L3P_15	E31
P10	IO_L14N_VREF_12	IO_L3P_15	F31
R11	IO_L14P_12	IO_L4N_VREF_15	K29
F6	IO_L15N_12	IO_L4P_15	L29
F5	IO_L15P_12	IO_L5N_15	G31
T11	IO_L16N_12	IO_L5P_15	H30
T10	IO_L16P_12	IO_L6N_15	J31
G7	IO_L17N_12	IO_L6P_15	J30
G6	IO_L17P_12	IO_L9N_CC_15	L31
U10	IO_L18N_12	IO_L9P_CC_15	K31
T9	IO_L18P_12		
E7	IO_L19N_12	IO_L0N_17	V24
E6	IO_L19P_12	IO_L0P_17	W24
N7	IO_L1N_12	IO_L10N_CC_17	AC30
N8	IO_L1P_12	IO_L10P_CC_17	AB30
L6	IO_L2N_12	IO_L11N_CC_17	AA30
M7	IO_L2P_12	IO_L11P_CC_17	AA29
P5	IO_L3N_12	IO_L12N_VRP_17	AE31
N5	IO_L3P_12	IO_L12P_VRN_17	AD31
L5	IO_L4N_VREF_12	IO_L13N_17	AC29
L4	IO_L4P_12	IO_L13P_17	AD30
P6	IO_L5N_12	IO_L14N_VREF_17	AG31
P7	IO_L5P_12	IO_L14P_17	AF31
K6	IO_L6N_12	IO_L15N_17	AD29
K7	IO_L6P_12	IO_L15P_17	AE29
T6	IO_L7N_12	IO_L16N_17	AK31
R6	IO_L7P_12	IO_L16P_17	AJ31
J5	IO_L8N_CC_12	IO_L17N_17	AF30
J6	IO_L8P_CC_12	IO_L17P_17	AF29
R8	IO_L9N_CC_12	IO_L18N_17	AH30
R7	IO_L9P_CC_12	IO_L18P_17	AJ30
		IO_L19N_17	AG30
V32	IO_L0P_SM8P_13	IO_L19P_17	AH29
AE32	IO_L11N_CC_13	IO_L1N_17	W26
AD32	IO_L11P_CC_13	IO_L1P_17	Y26
AH33	IO_L12N_VRP_13	IO_L2N_17	W25
AG33	IO_L12P_VRN_13	IO_L2P_17	V25
AK33	IO_L13N_13	IO_L3N_17	W27
AK34	IO_L13P_13	IO_L3P_17	Y27
AH32	IO_L14N_VREF_13	IO_L4N_VREF_17	W30
AG32	IO_L14P_13	IO_L4P_17	V30
AK32	IO_L15N_13	IO_L5N_17	V27
AJ32	IO_L15P_13	IO_L5P_17	V28
AL33	IO_L16N_13	IO_L6N_17	Y31
AL34	IO_L16P_13	IO_L6P_17	W31
AM32	IO_L17N_13	IO_L7N_17	V29
AM33	IO_L17P_13	IO_L7P_17	W29
AN33	IO_L18N_13	IO_L8N_CC_17	Y29
AN34	IO_L18P_13	IO_L8P_CC_17	Y28
AP32	IO_L19N_13	IO_L9N_CC_17	AA31
AN32	IO_L19P_13	IO_L9P_CC_17	AB31
Y32	IO_L4P_13		
AC32	IO_L6P_SM3P_13		
AC33	IO_L7P_SM2P_13		
AE33	IO_L8N_CC_SM1N_13		
AF33	IO_L8P_CC_SM1P_13		
AE34	IO_L9N_CC_SMON_13		
AF34	IO_L9P_CC_SMOP_13		

IC1 (20/21)
XC5VSX95T-1FFG1136CS1

AC5	IO_L0N_18	IO_L0N_20	E8
AC4	IO_L0P_18	IO_L0P_20	E9
AF5	IO_L10N_CC_18	IO_L10N_CC_20	K9
AG5	IO_L10P_CC_18	IO_L10P_CC_20	K8
V7	IO_L11N_CC_18	IO_L11N_CC_20	C13
W7	IO_L11P_CC_18	IO_L11P_CC_20	B13
AG6	IO_L12N_VRP_18	IO_L12N_VRP_20	L11
AH5	IO_L12P_VRN_18	IO_L12P_VRN_20	L10
W11	IO_L13N_18	IO_L13N_20	G12
Y11	IO_L13P_18	IO_L13P_20	G11
AG7	IO_L14N_VREF_18	IO_L14N_VREF_20	L8
AH7	IO_L14P_18	IO_L14P_20	M8
W9	IO_L15N_18	IO_L15N_20	E11
W10	IO_L15P_18	IO_L15P_20	F11
AJ6	IO_L16N_18	IO_L16N_20	L9
AJ7	IO_L16P_18	IO_L16P_20	M10
U8	IO_L17N_18	IO_L17N_20	E13
V8	IO_L17P_18	IO_L17P_20	E12
AK6	IO_L18N_18	IO_L18N_20	N9
AK7	IO_L18P_18	IO_L18P_20	N10
V9	IO_L19N_18	IO_L19N_20	G13
V10	IO_L19P_18	IO_L19P_20	F13
AB7	IO_L1N_18	IO_L1N_20	F8
AB6	IO_L1P_18	IO_L1P_20	F9
AB5	IO_L2N_18	IO_L2N_20	G10
AA5	IO_L2P_18	IO_L2P_20	F10
AD7	IO_L3N_18	IO_L3N_20	H8
AC7	IO_L3P_18	IO_L3P_20	G8
Y9	IO_L4N_VREF_18	IO_L4N_VREF_20	D10
Y8	IO_L4P_18	IO_L4P_20	D11
AD5	IO_L5N_18	IO_L5N_20	J11
AD4	IO_L5P_18	IO_L5P_20	K11
Y7	IO_L6N_18	IO_L6N_20	C12
AA6	IO_L6P_18	IO_L6P_20	D12
AE6	IO_L7N_18	IO_L7N_20	H9
AD6	IO_L7P_18	IO_L7P_20	H10
Y6	IO_L8N_CC_18	IO_L8N_CC_20	B12
W6	IO_L8P_CC_18	IO_L8P_CC_20	A13
AF6	IO_L9N_CC_18	IO_L9N_CC_20	J9
AE7	IO_L9P_CC_18	IO_L9P_CC_20	J10
L24	IO_L0N_19		
K24	IO_L0P_19	IO_L10N_CC_21	AK27
F28	IO_L10N_CC_19	IO_L10P_CC_21	AK28
E28	IO_L10P_CC_19	IO_L9N_CC_21	AJ29
E27	IO_L11N_CC_19	IO_L9P_CC_21	AK29
E26	IO_L11P_CC_19	IO_L0N_22	AP14
M27	IO_L12N_VRP_19	IO_L0P_22	AN14
N27	IO_L12P_VRN_19	IO_L10N_CC_22	AD11
K26	IO_L14N_VREF_19	IO_L10P_CC_22	AD10
K27	IO_L14P_19	IO_L11P_CC_22	AJ11
P27	IO_L16N_19	IO_L11P_CC_22	AK11
P26	IO_L16P_19	IO_L12N_VRP_22	AE9
P24	IO_L17N_19	IO_L12P_VRN_22	AF8
N24	IO_L17P_19	IO_L14P_22	AF9
N25	IO_L18N_19	IO_L16N_22	AE11
P25	IO_L18P_19	IO_L17N_22	AH10
T24	IO_L19N_19	IO_L18P_22	AG8
R24	IO_L19P_19	IO_L1N_22	AA10
L26	IO_L1N_19	IO_L1P_22	AB10
L25	IO_L1P_19	IO_L2N_22	AM13
J25	IO_L2N_19	IO_L2P_22	AN13
J24	IO_L2P_19	IO_L3N_22	AA9
M26	IO_L3N_19	IO_L3P_22	AA8
M25	IO_L3P_19	IO_L4N_VREF_22	AN12
J26	IO_L4N_VREF_19	IO_L4P_22	AP12
J27	IO_L4P_19	IO_L5N_22	AB8
G26	IO_L5N_19	IO_L5P_22	AC8
G25	IO_L5P_19	IO_L6N_22	AM11
H24	IO_L6N_19	IO_L6P_22	AM12
H25	IO_L6P_19	IO_L7N_22	AC9
F26	IO_L7N_19	IO_L7P_22	AC10
F25	IO_L7P_19	IO_L8N_CC_22	AL10
H27	IO_L8N_CC_19	IO_L8P_CC_22	AL11
G27	IO_L8P_CC_19	IO_L9N_CC_22	AD9
		IO_L9P_CC_22	AE8

IC1 (21/21)
XC5VSX95T-1FFG1136CS1

A26	IO_L10N_CC_23	IO_L0N_25	AL30
C29	IO_L12P_VRN_23	IO_L0P_25	AL29
D26	IO_L13P_23	IO_L11N_CC_25	AL24
A29	IO_L14P_23	IO_L11P_CC_25	AL25
D27	IO_L15N_23	IO_L1N_25	AL31
C28	IO_L15P_23	IO_L1P_25	AM31
A31	IO_L16N_23	IO_L4N_VREF_25	AL28
B31	IO_L16P_23	IO_L4P_25	AM27
D29	IO_L17N_23	IO_L9N_CC_25	AL26
C30	IO_L17P_23	IO_L9P_CC_25	AM26
D30	IO_L18N_23		
D31	IO_L18P_23		
B30	IO_L19N_23		
A30	IO_L19P_23		
A21	IO_L1N_23		
B21	IO_L1P_23		
C18	IO_L2N_23		
C19	IO_L2P_23		
B22	IO_L3N_23		
C22	IO_L3P_23		
B18	IO_L4P_23		
C23	IO_L5P_23		
A19	IO_L6P_23		
A24	IO_L7N_23		
C24	IO_L8P_CC_23		
B26	IO_L9P_CC_23		

UNUSED PIN

MY-118 (23/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_23

MY-118 (24/49)
SUFFIX: -12

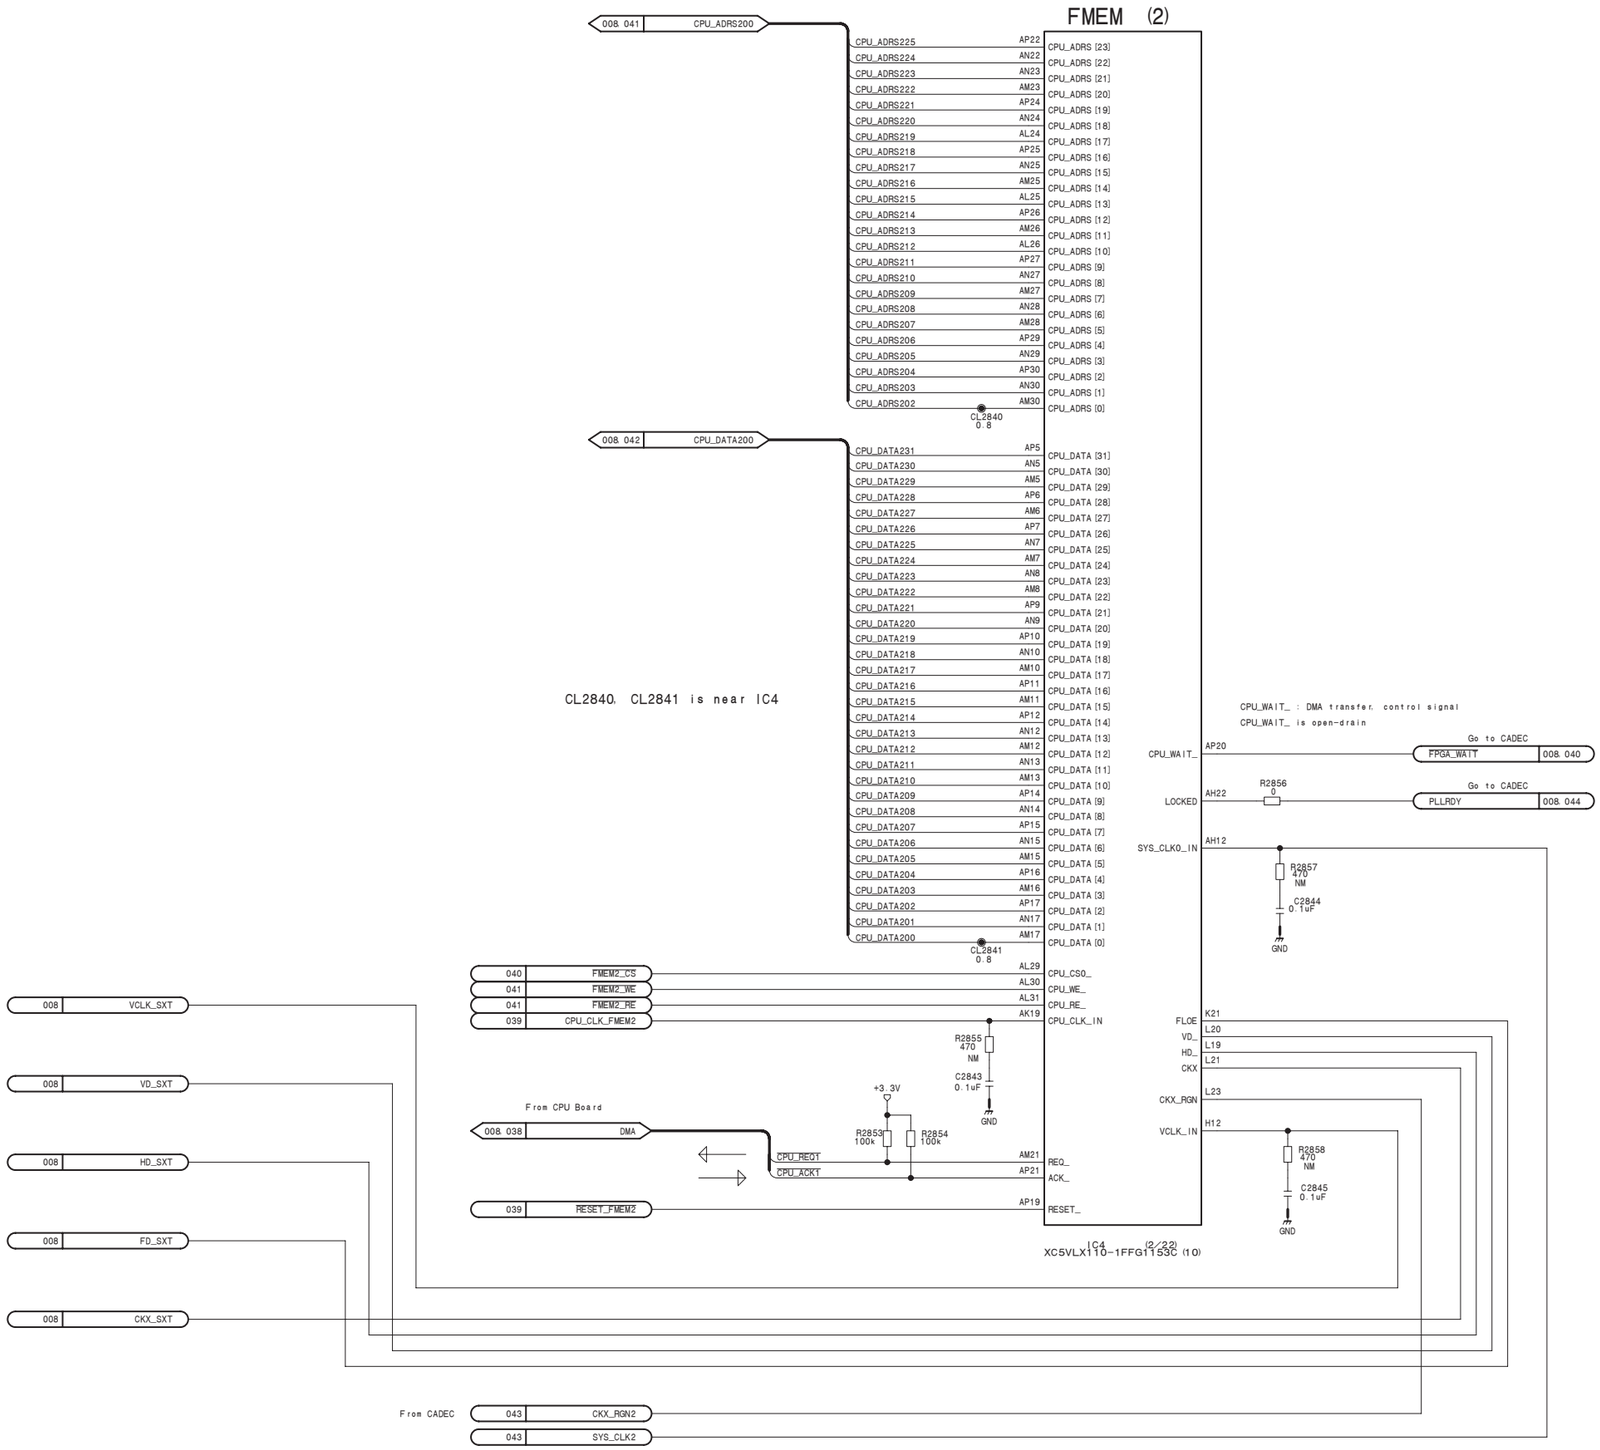

FMEM (2)
CPU BUS, Video signal

MY-118 (24/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_24

MY-118 (25/49)
SUFFIX: -12

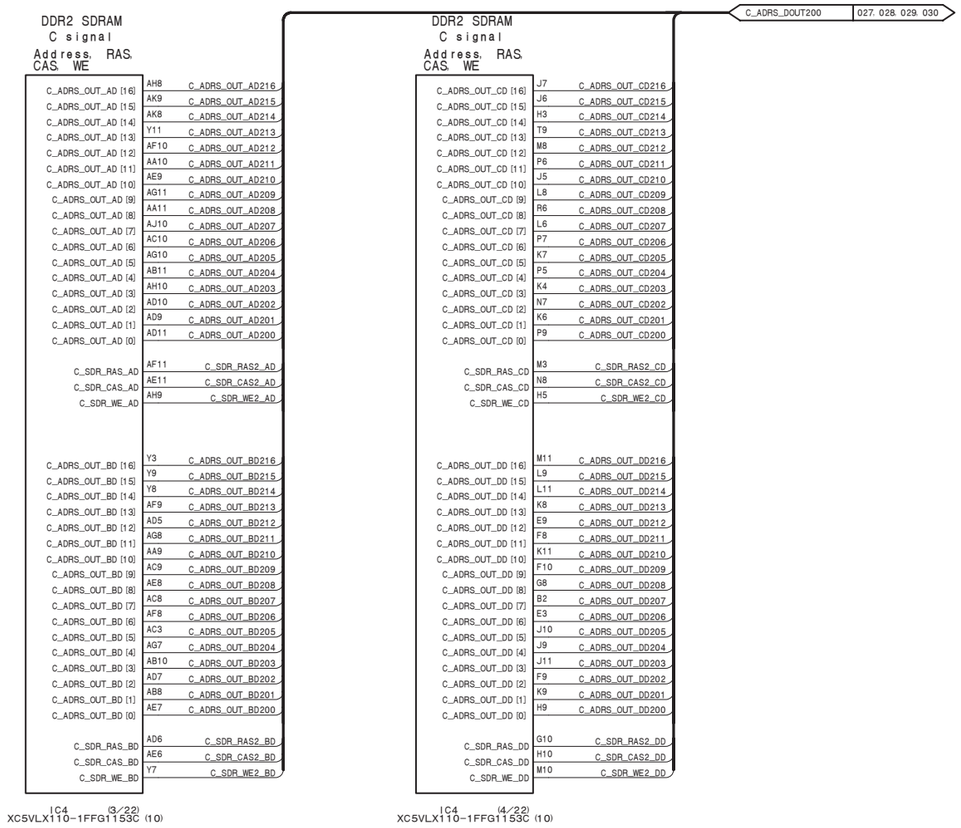

FMEM (2), C signal
Address, RAS, CAS, WE
CS, ODT, CKE, memory clock
DATA, DQS

MY-118 (25/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_25

4-488
MVS-8000X/7000X

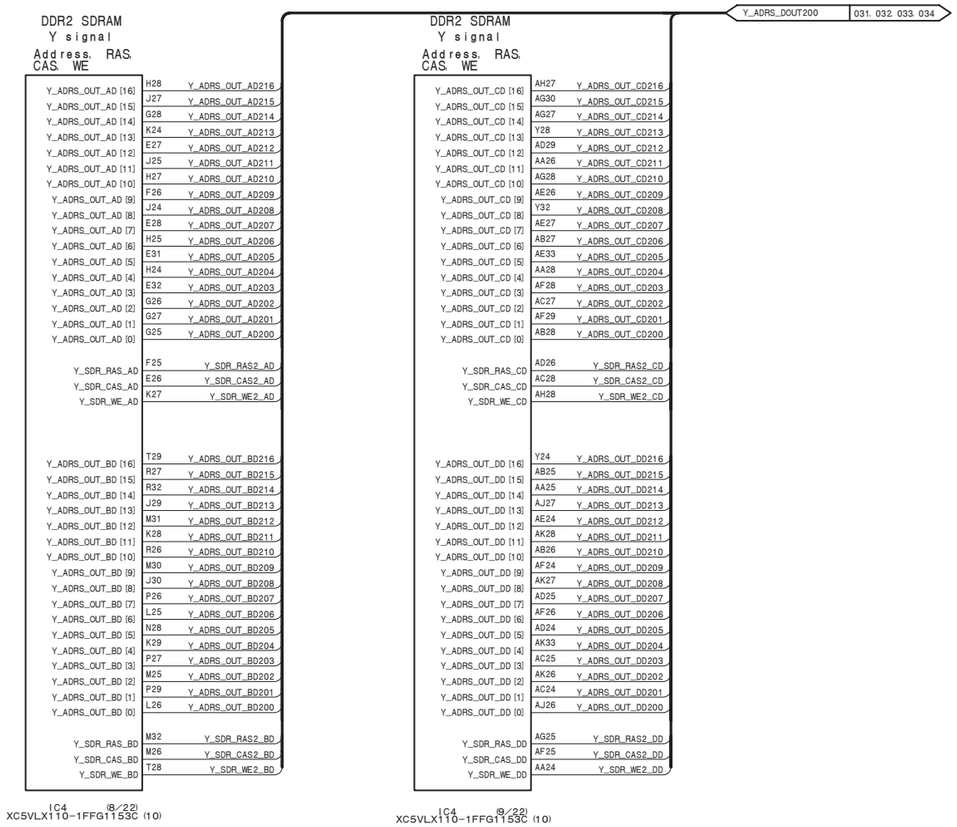

FMEM (2), Y signal
Address, RAS, CAS, WE
CS, ODT, CKE, memory clock
DATA, DQS

MY-118 (26/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_26

MY-118 (27/49) **SUFFIX: -12**

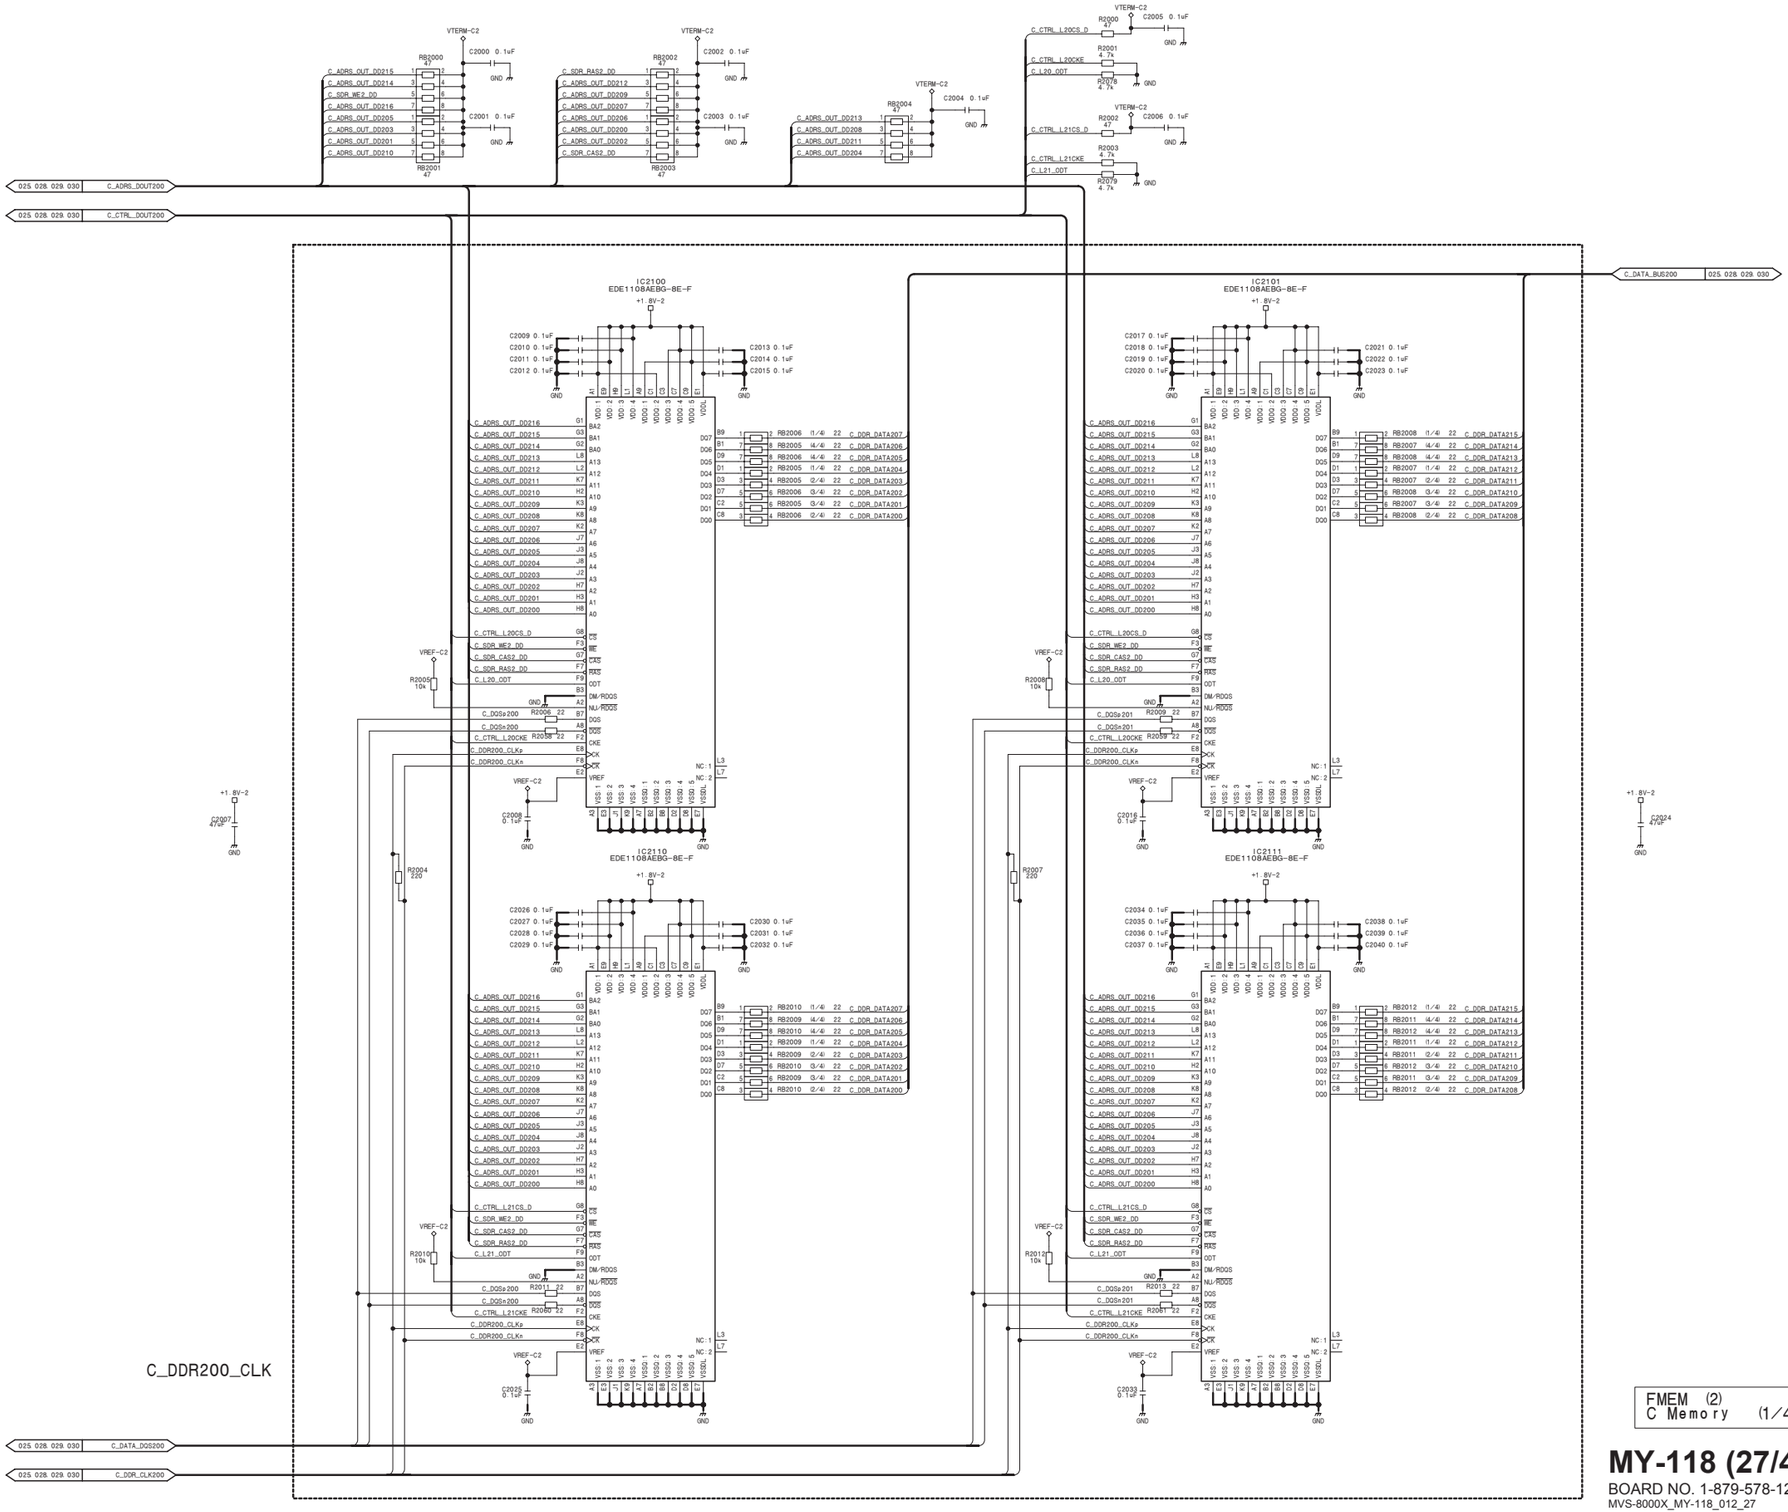

FMEM (2)
C Memory (1/4)

MY-118 (27/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_27

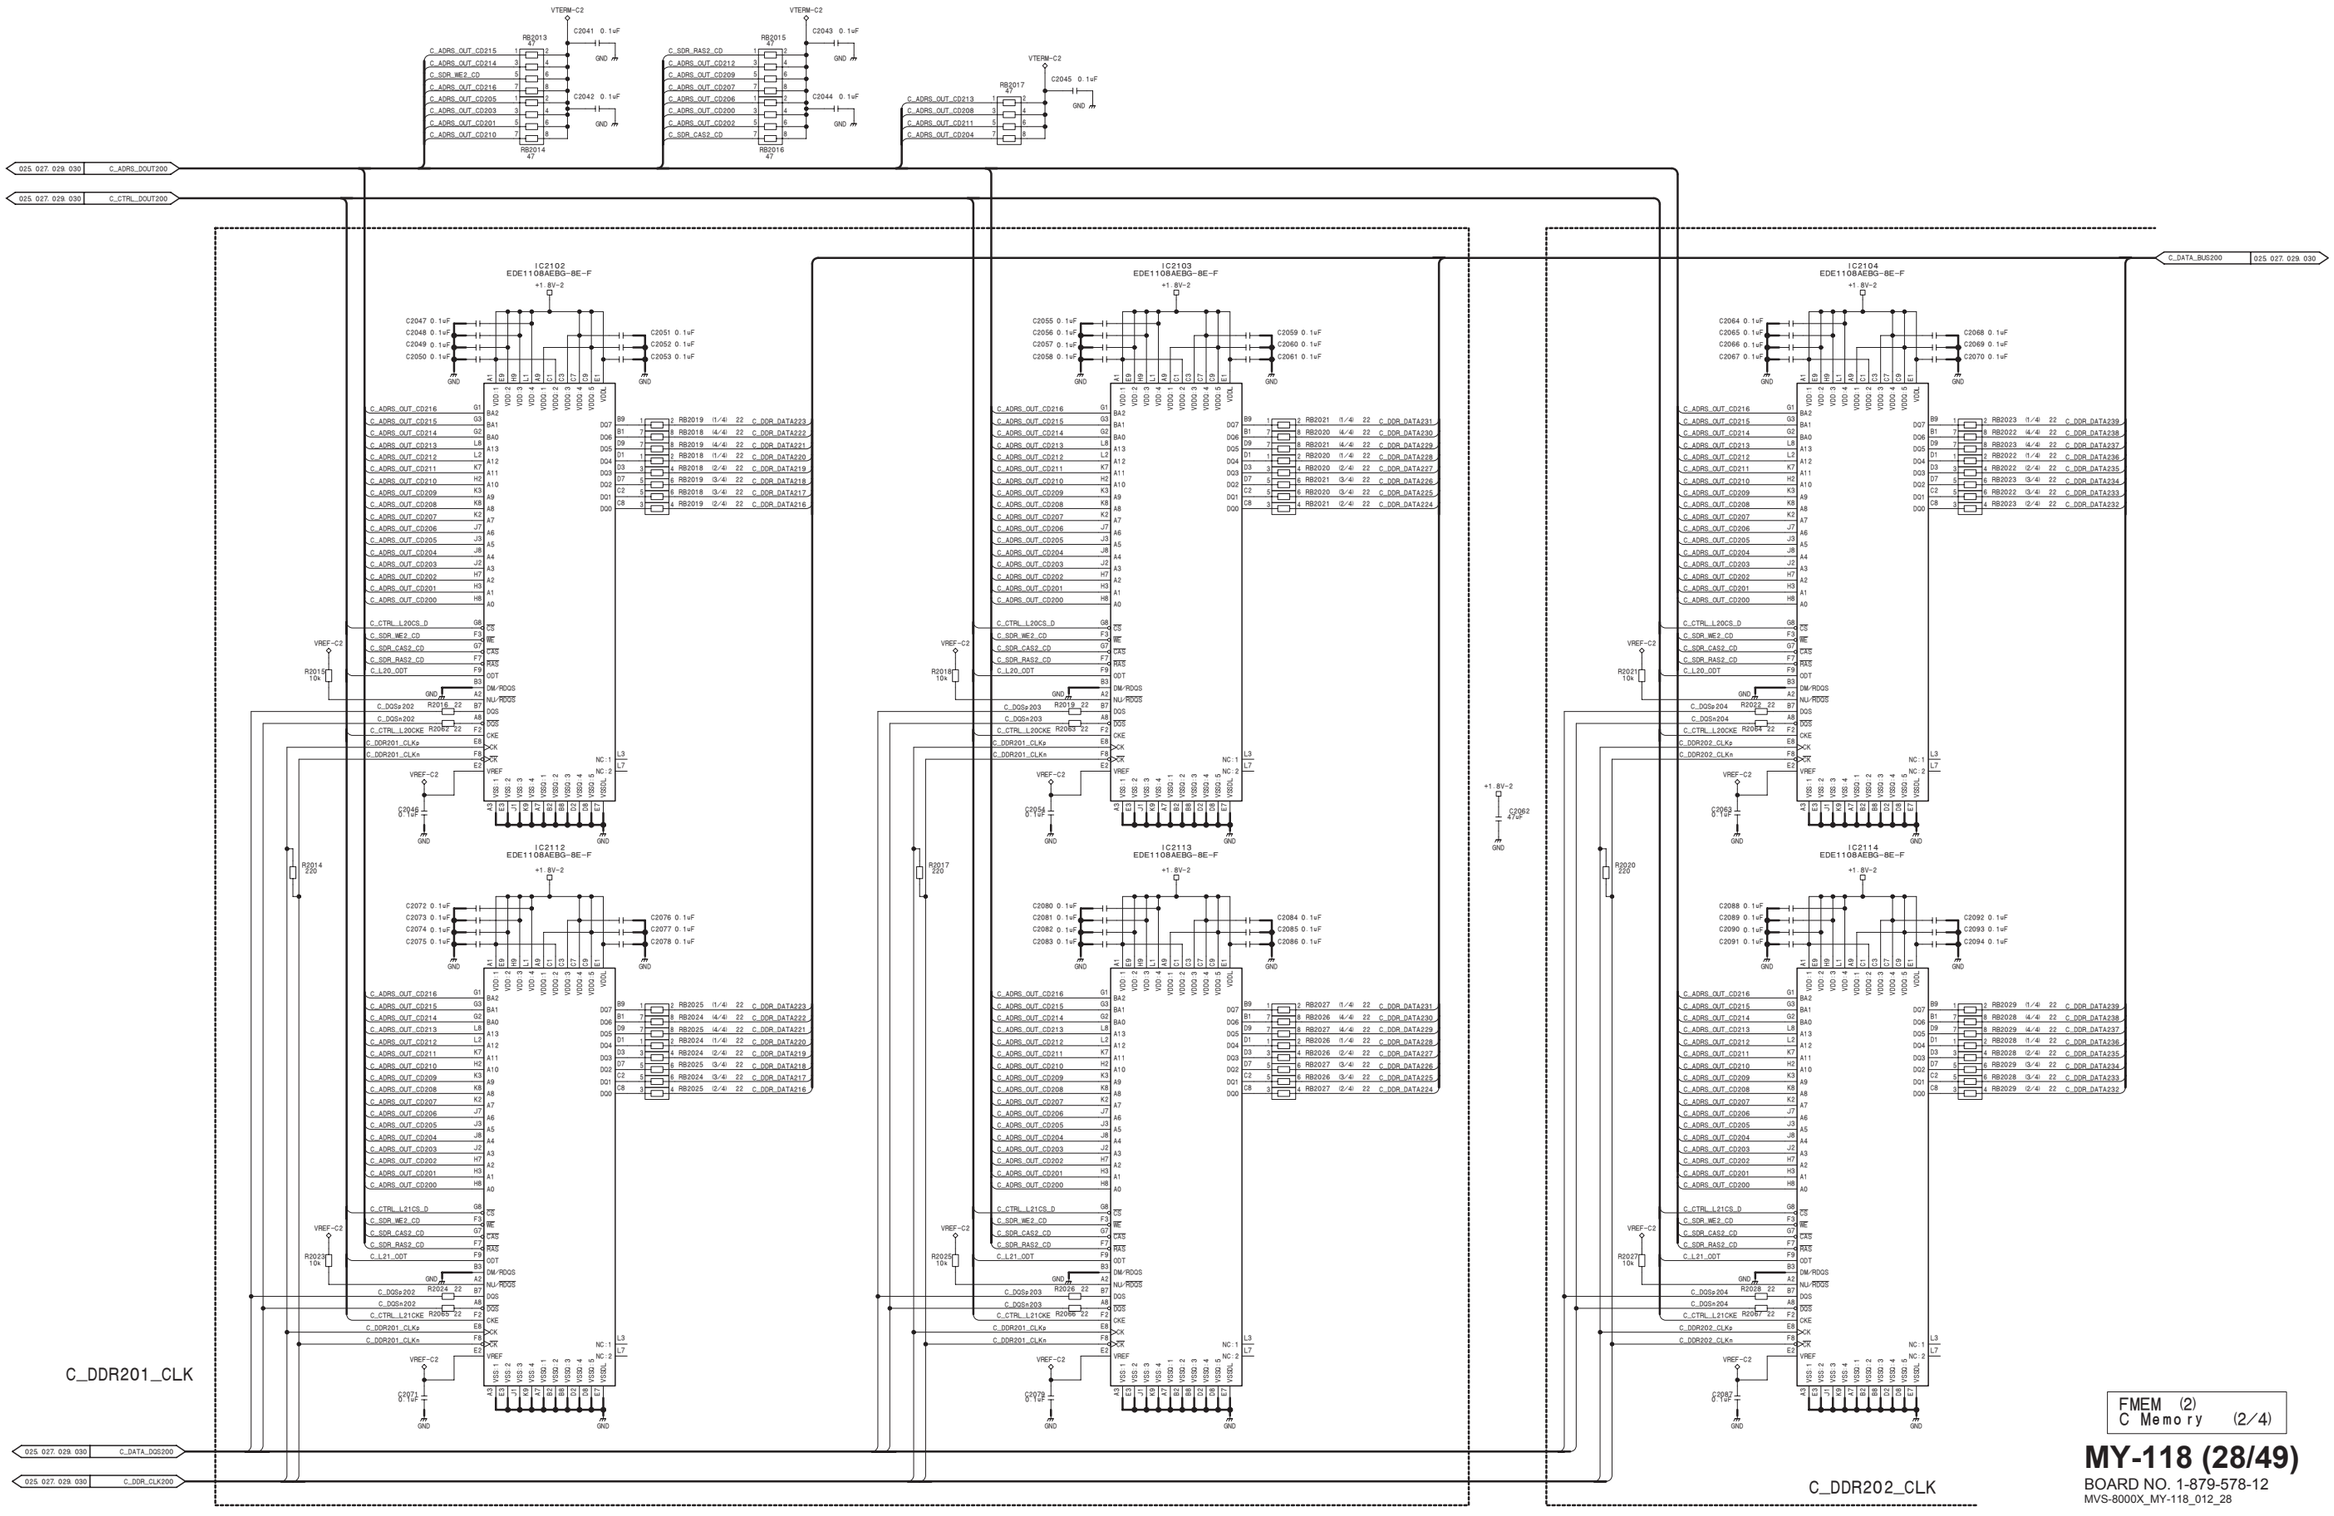

FMEM (2)
C Memory (2/4)

MY-118 (28/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_28

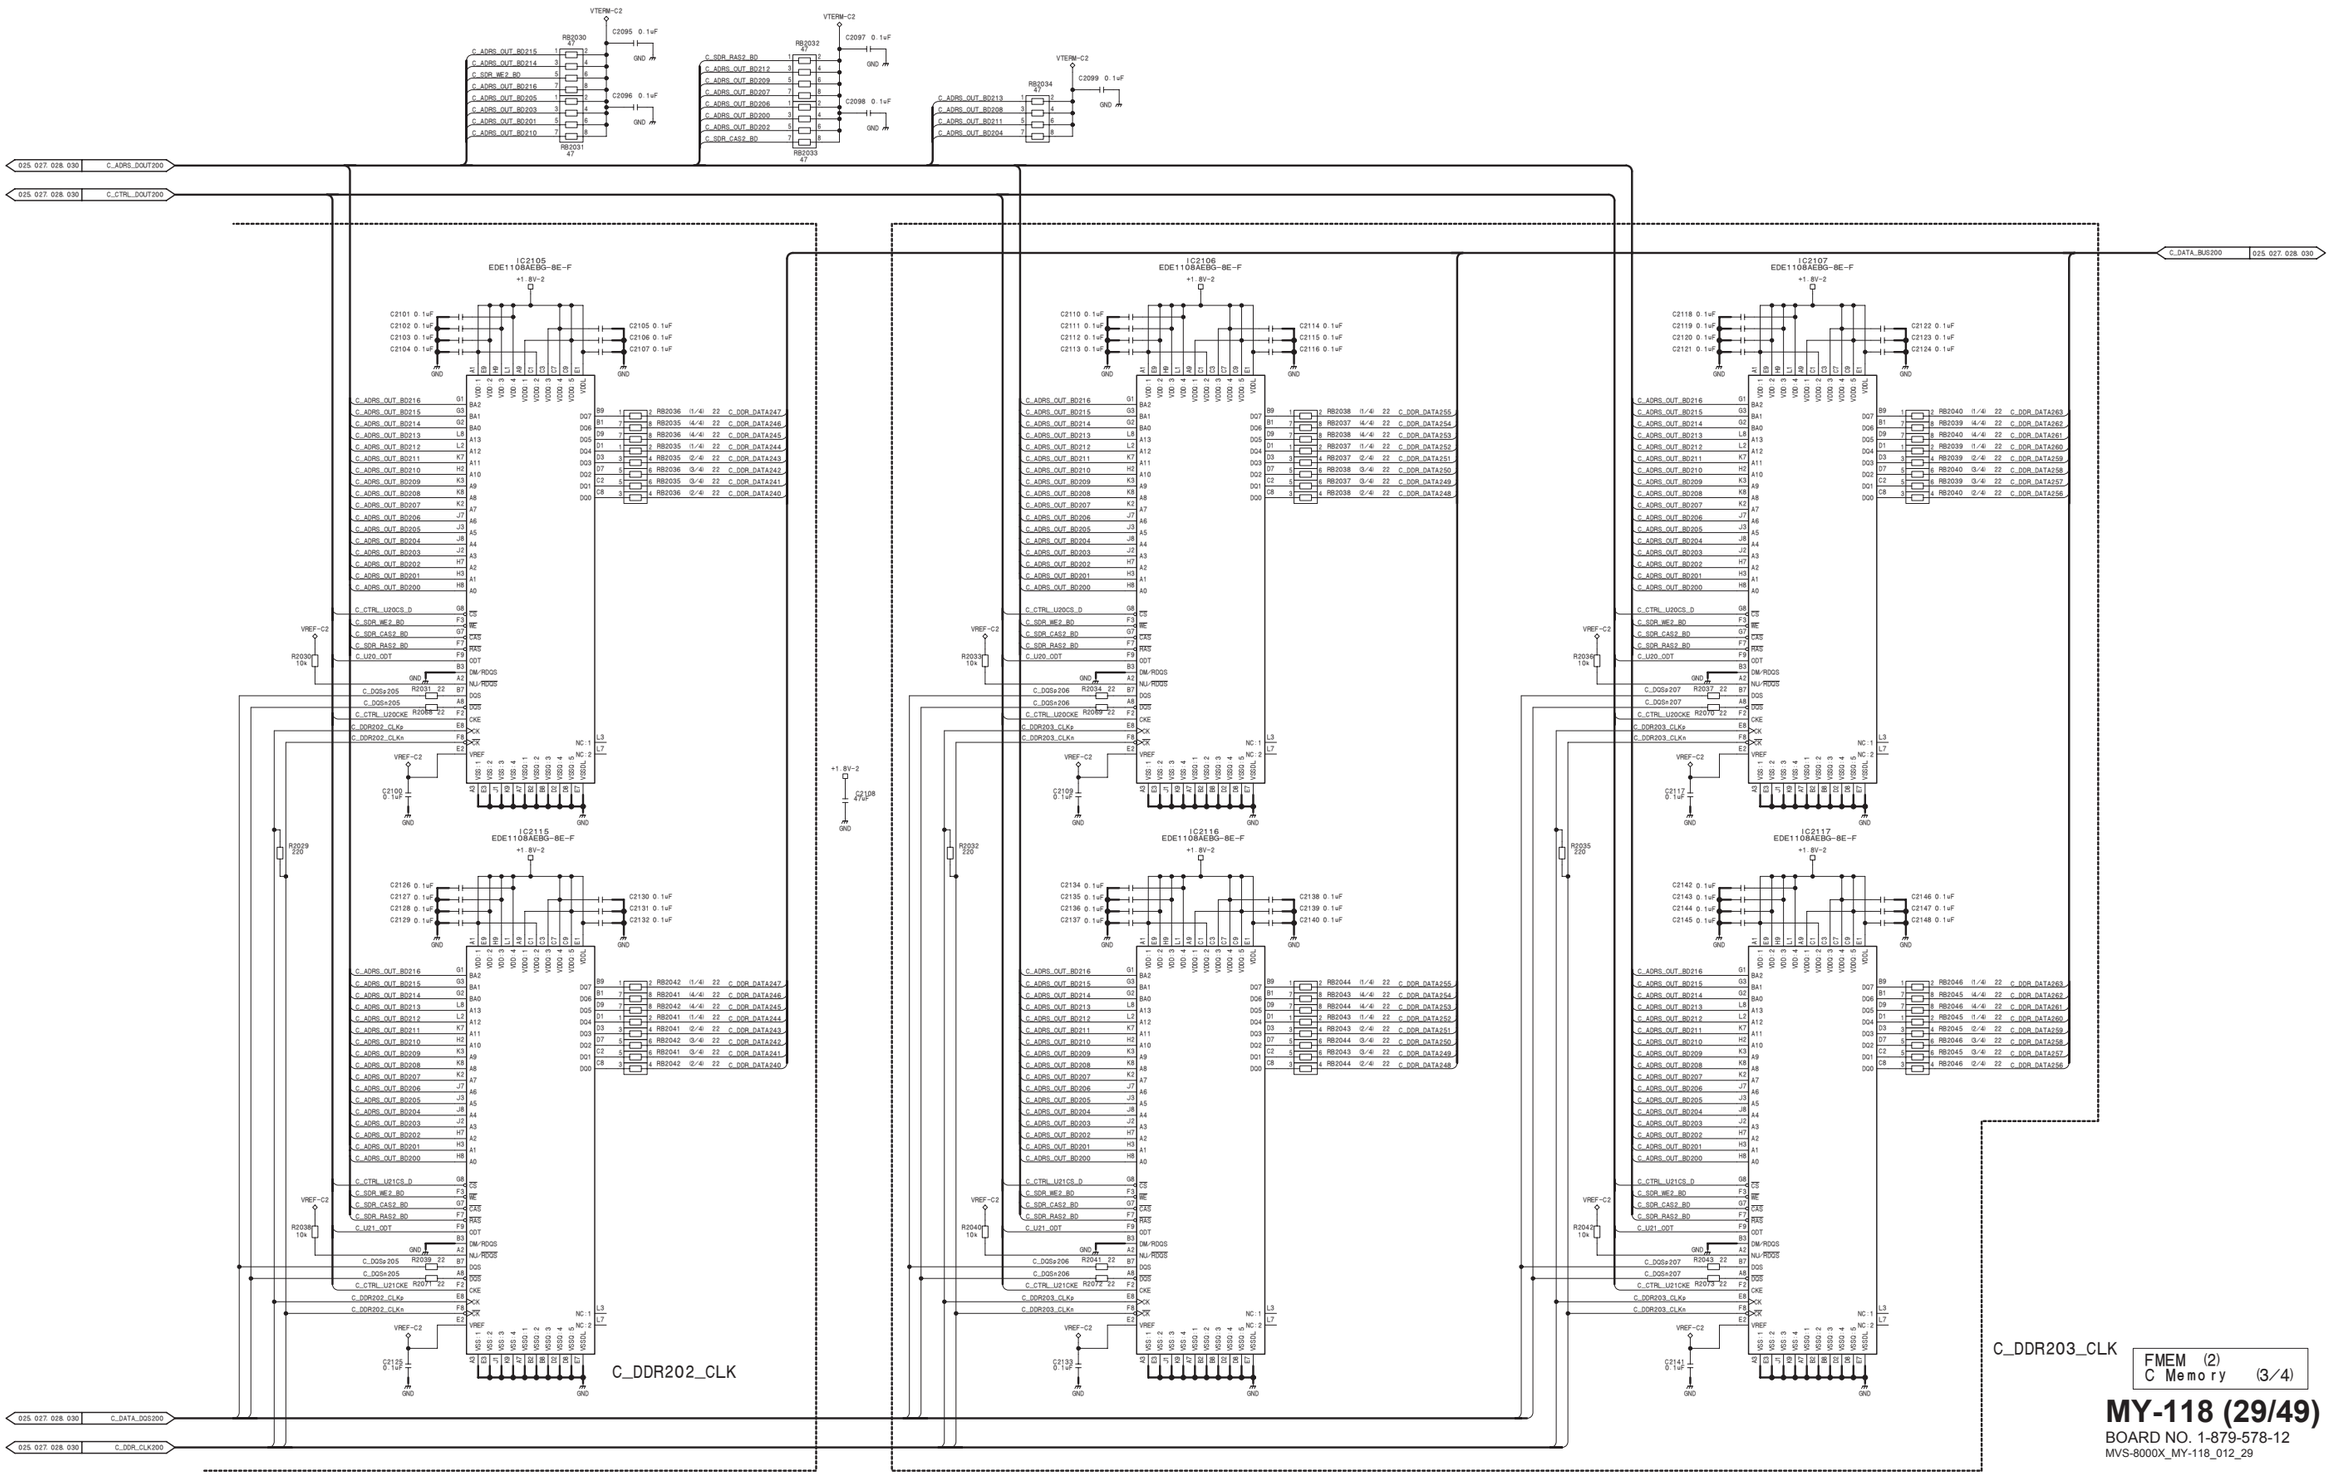
C_ADRS_DOUT200
C_CTRL_DOUT200
C_DATA_BUS200
C_DATA_DQS200
C_DDR_CLK200
IC2105 EDE1108AEBG-8E-F
IC2106 EDE1108AEBG-8E-F
IC2107 EDE1108AEBG-8E-F
IC2115 EDE1108AEBG-8E-F
IC2116 EDE1108AEBG-8E-F
IC2117 EDE1108AEBG-8E-F
+1.8V-2
VTERM-C2
VREF-C2
GND
C_DDR202_CLK
C_DDR203_CLK
FMEM (2)
C Memory (3/4)
MY-118 (29/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_29

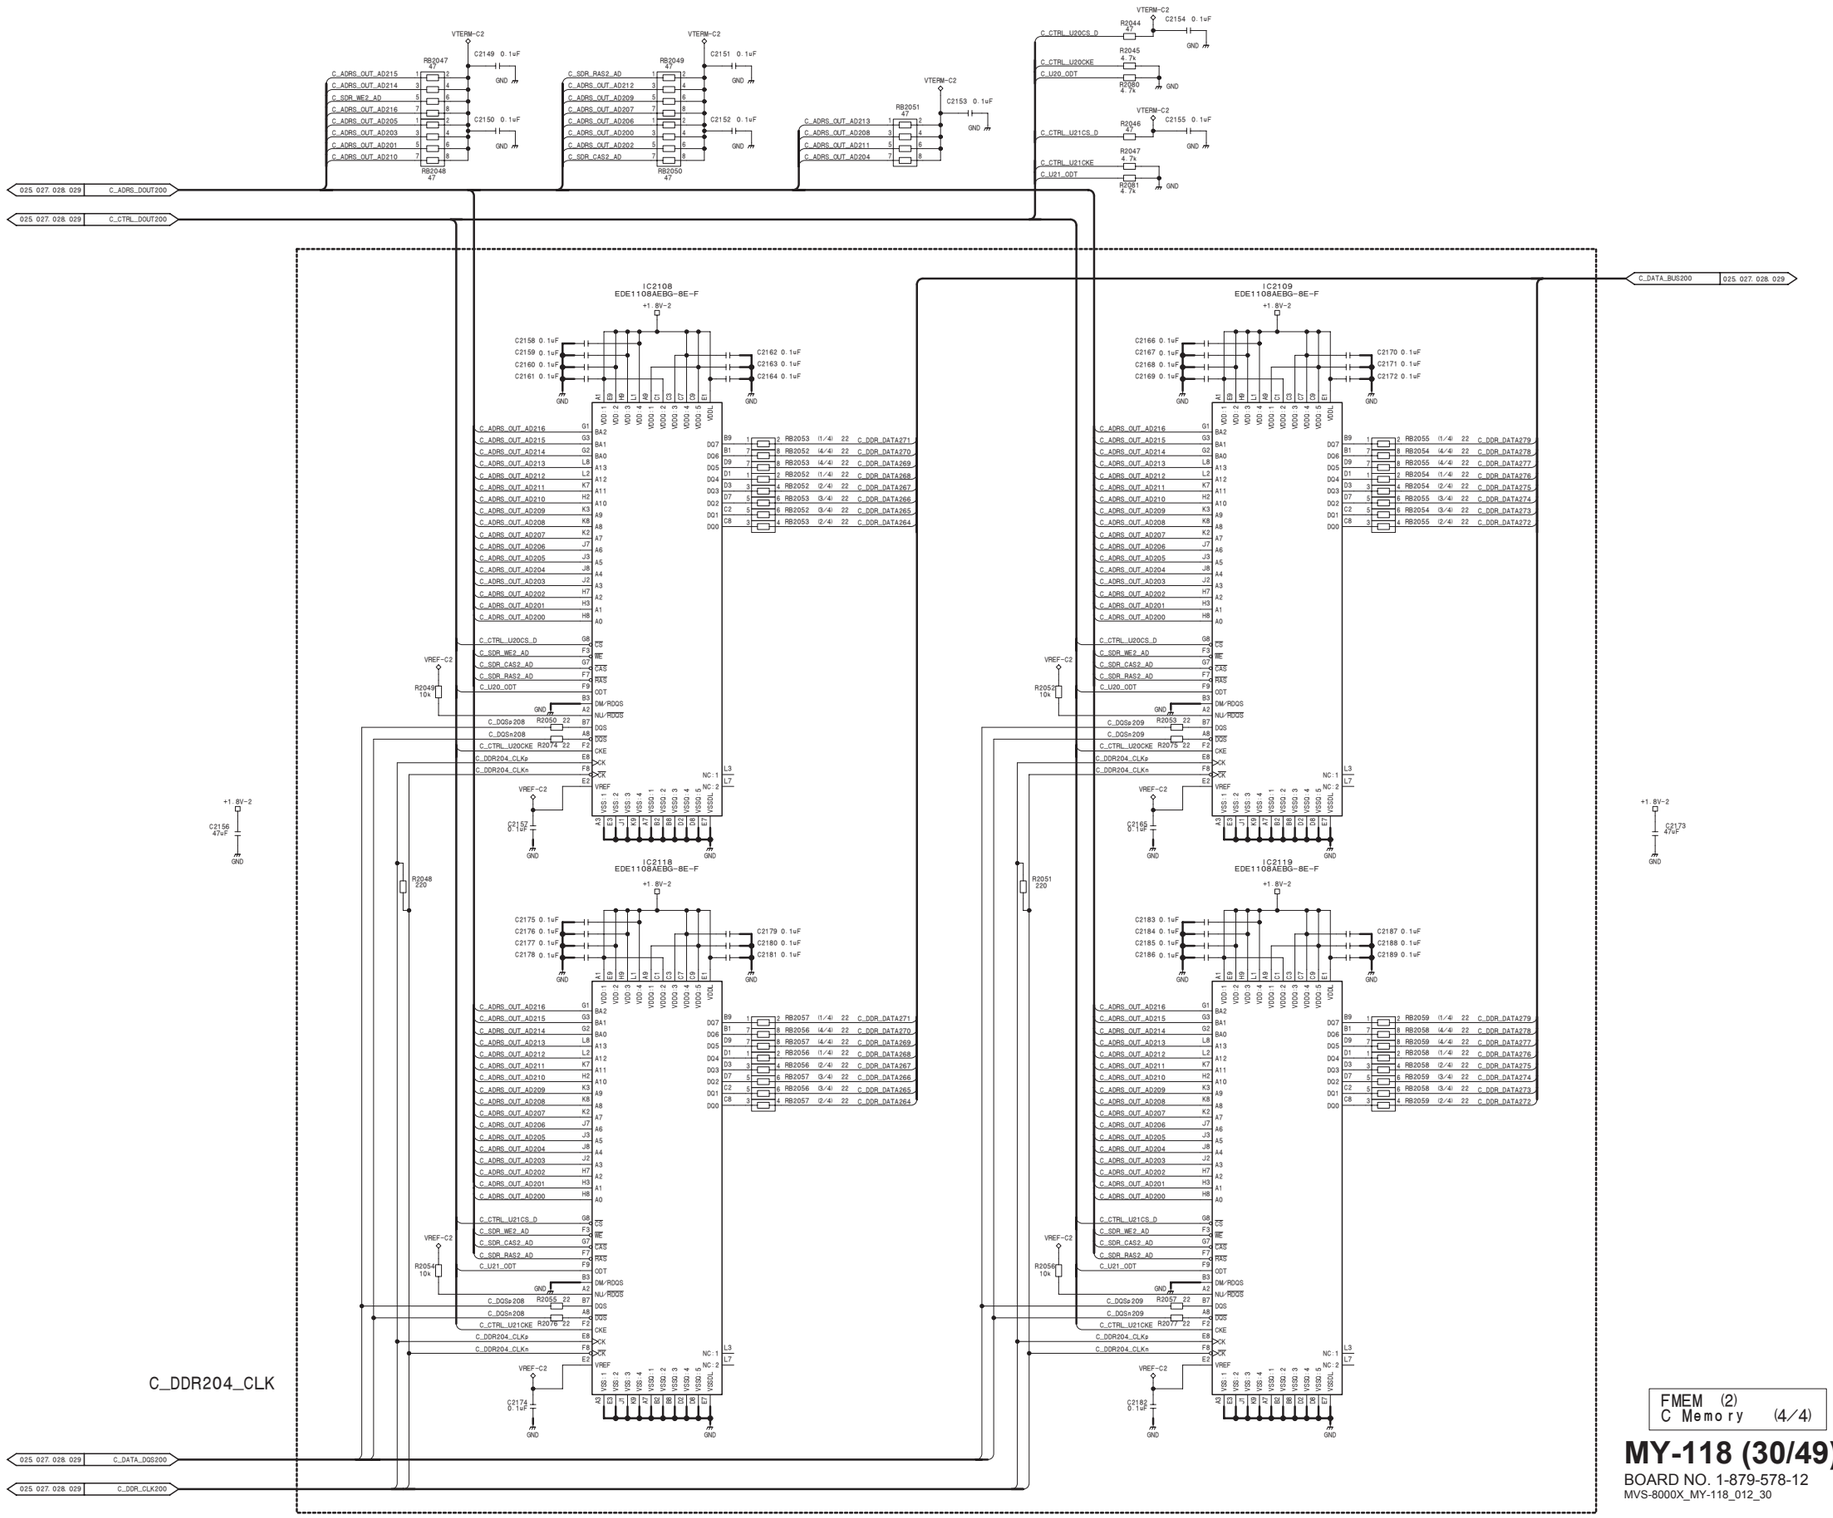

FMEM (2)
C Memory (4/4)

MY-118 (30/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_30

MY-118 (31/49)
SUFFIX: -12

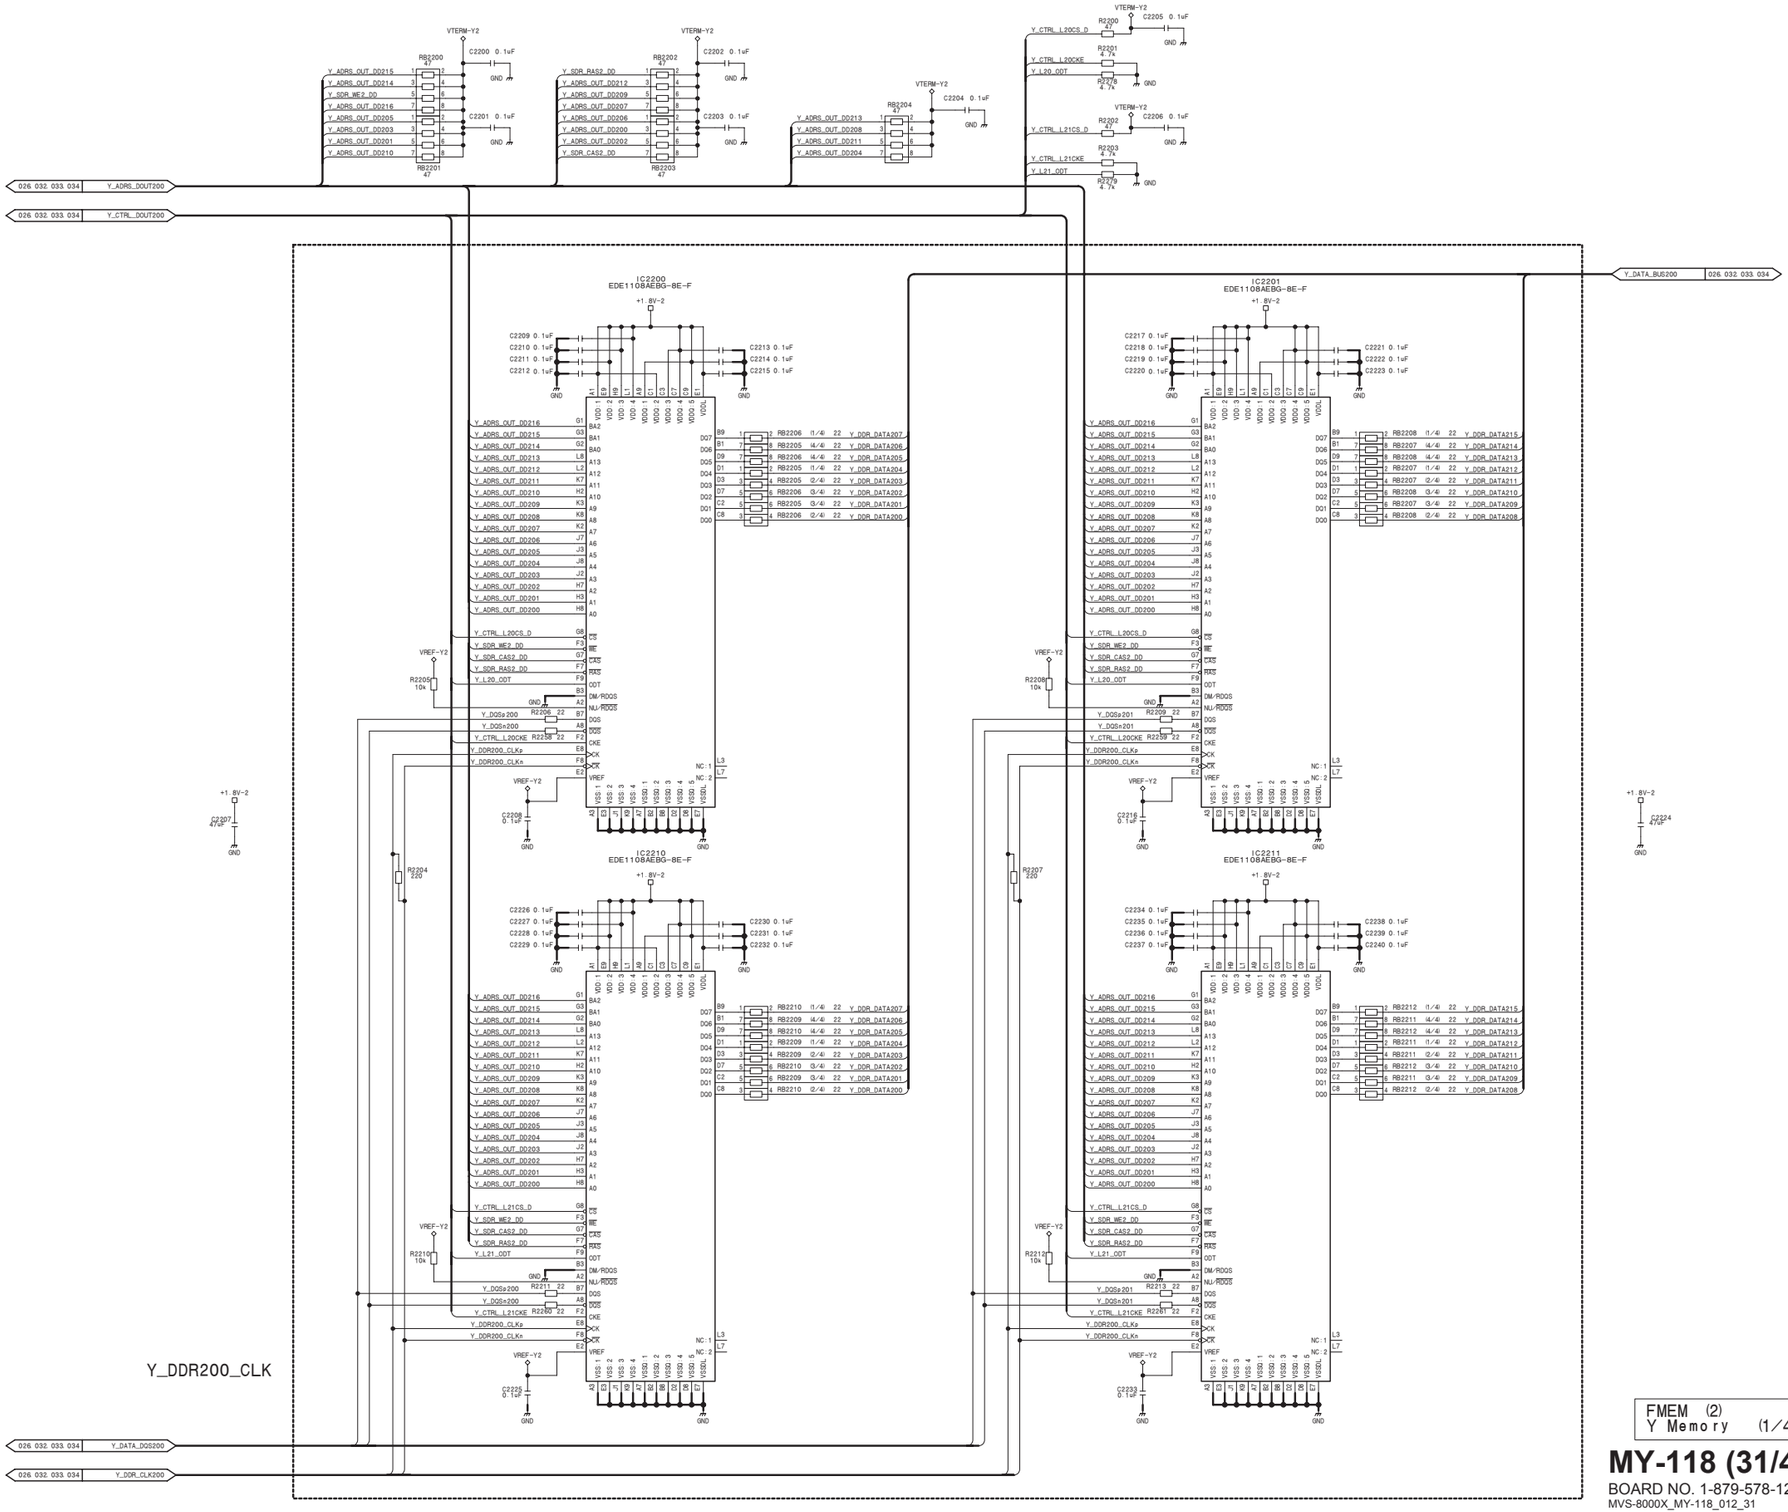

FMEM (2)
Y Memory (1/4)

MY-118 (31/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_31

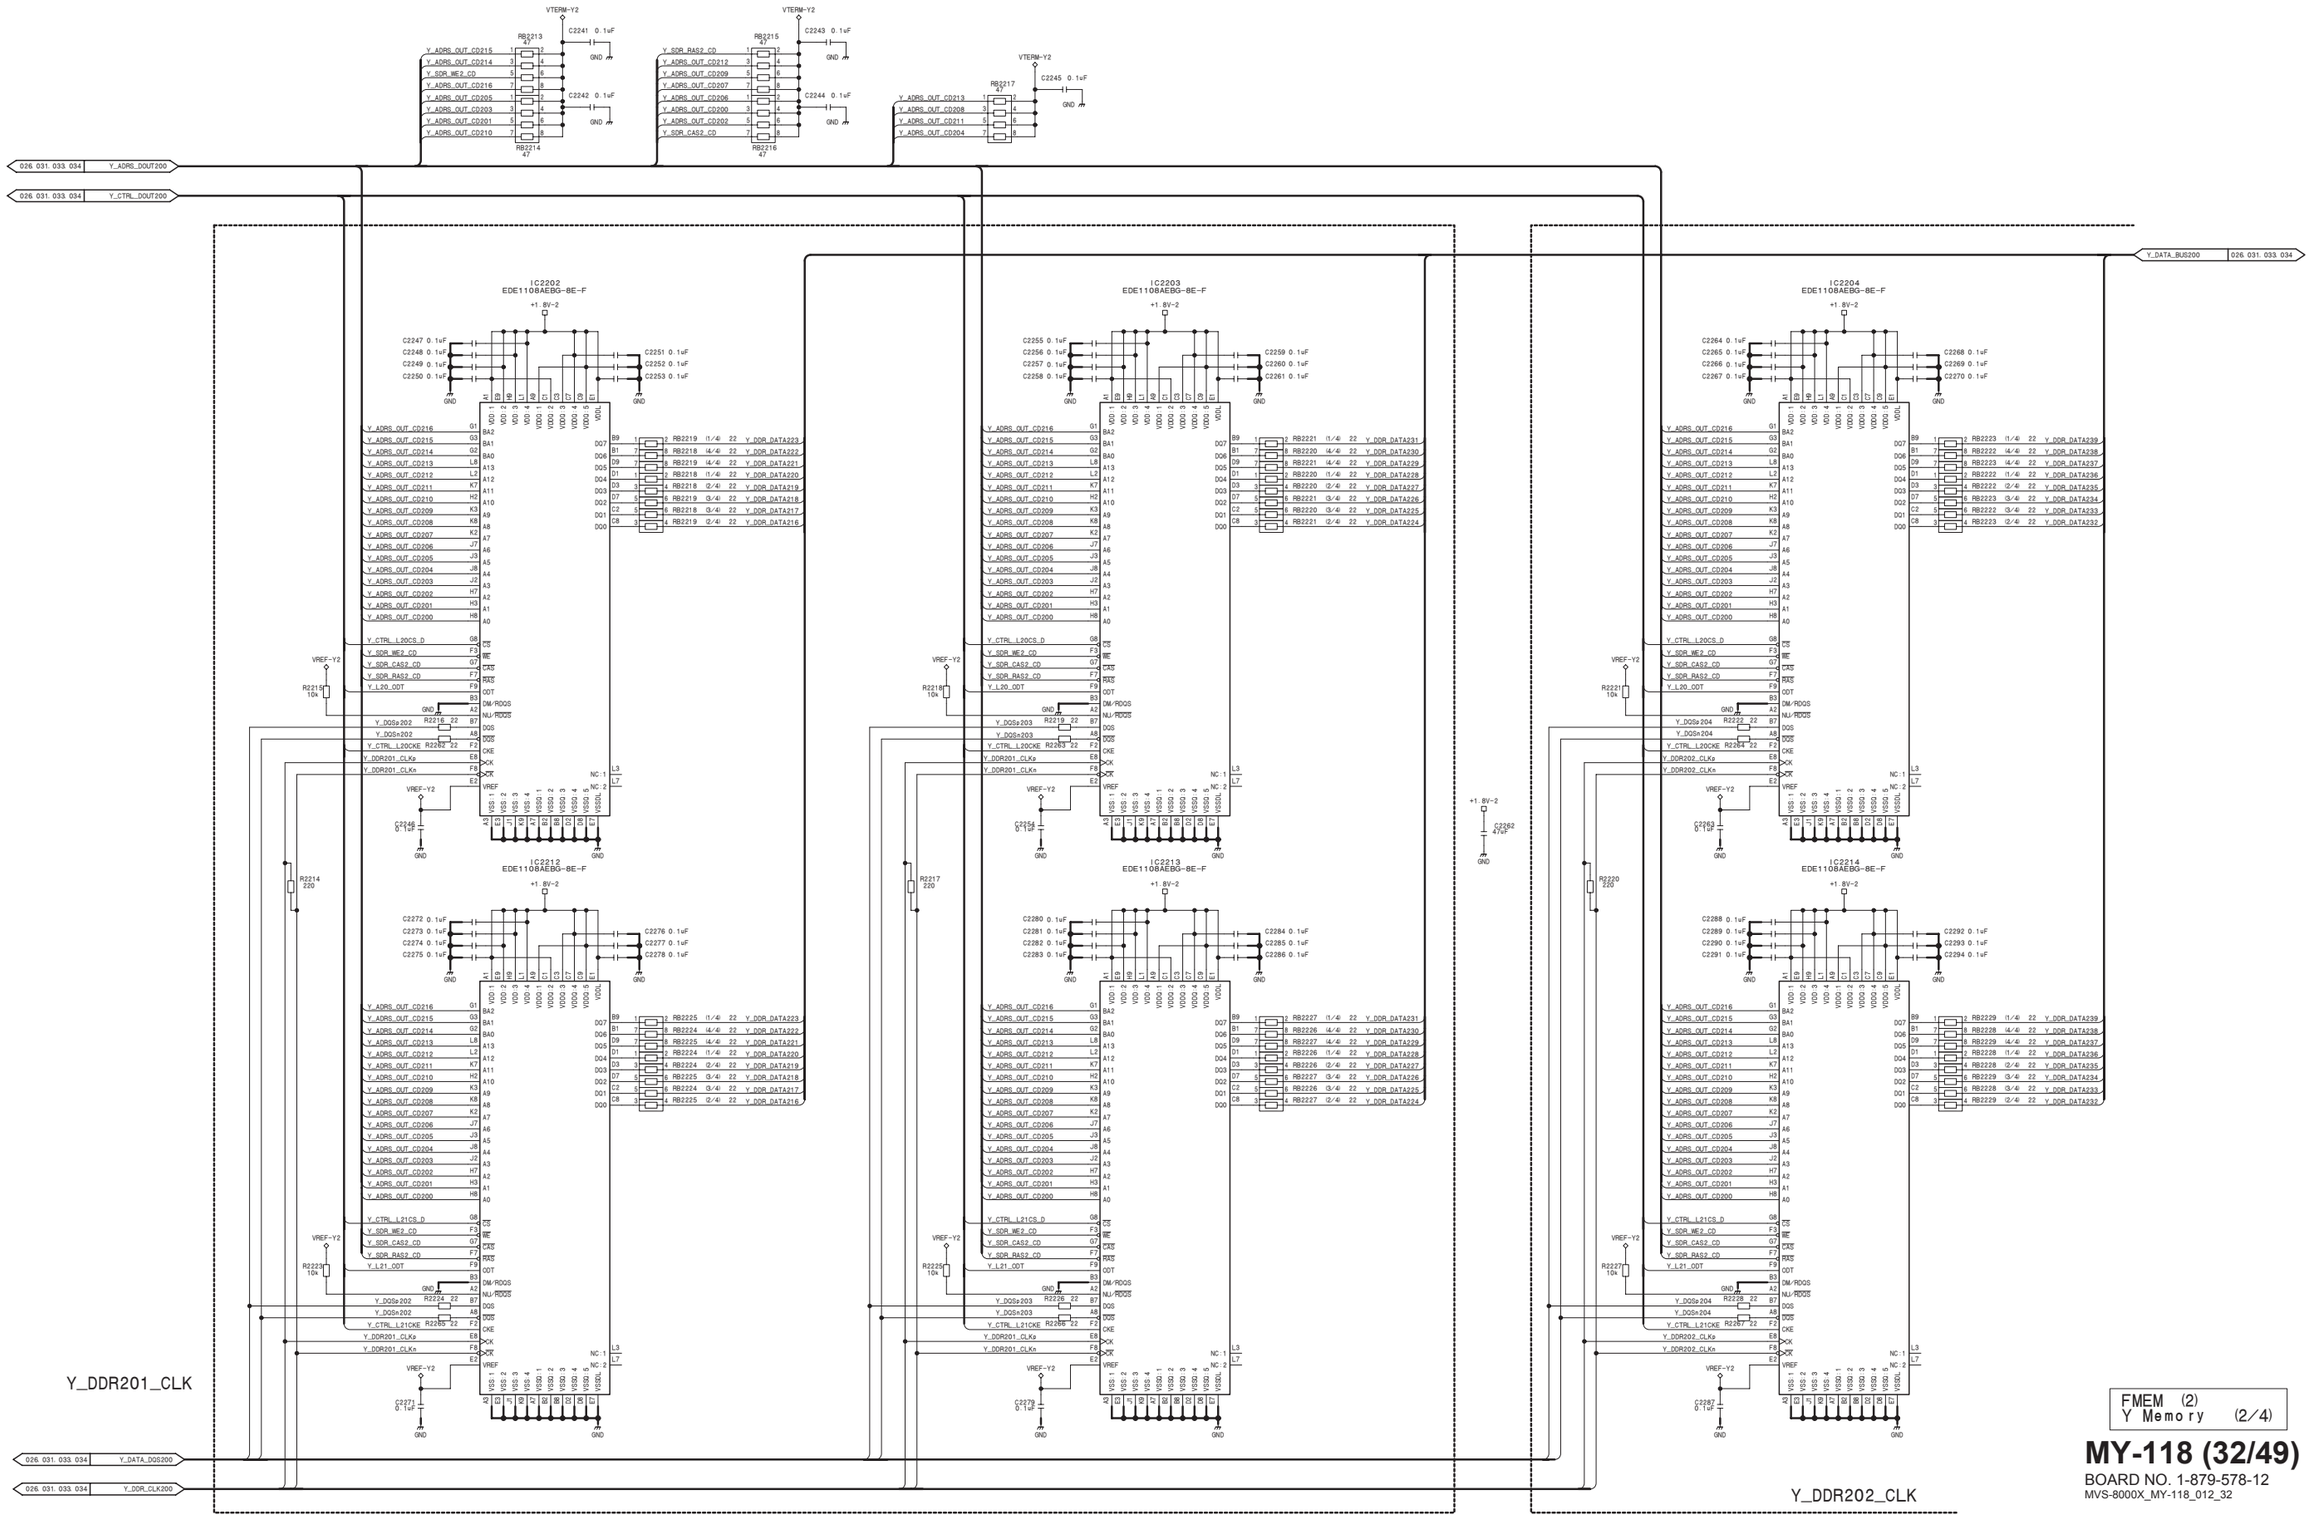

MVS-8000X/7000X

4-495 4-495

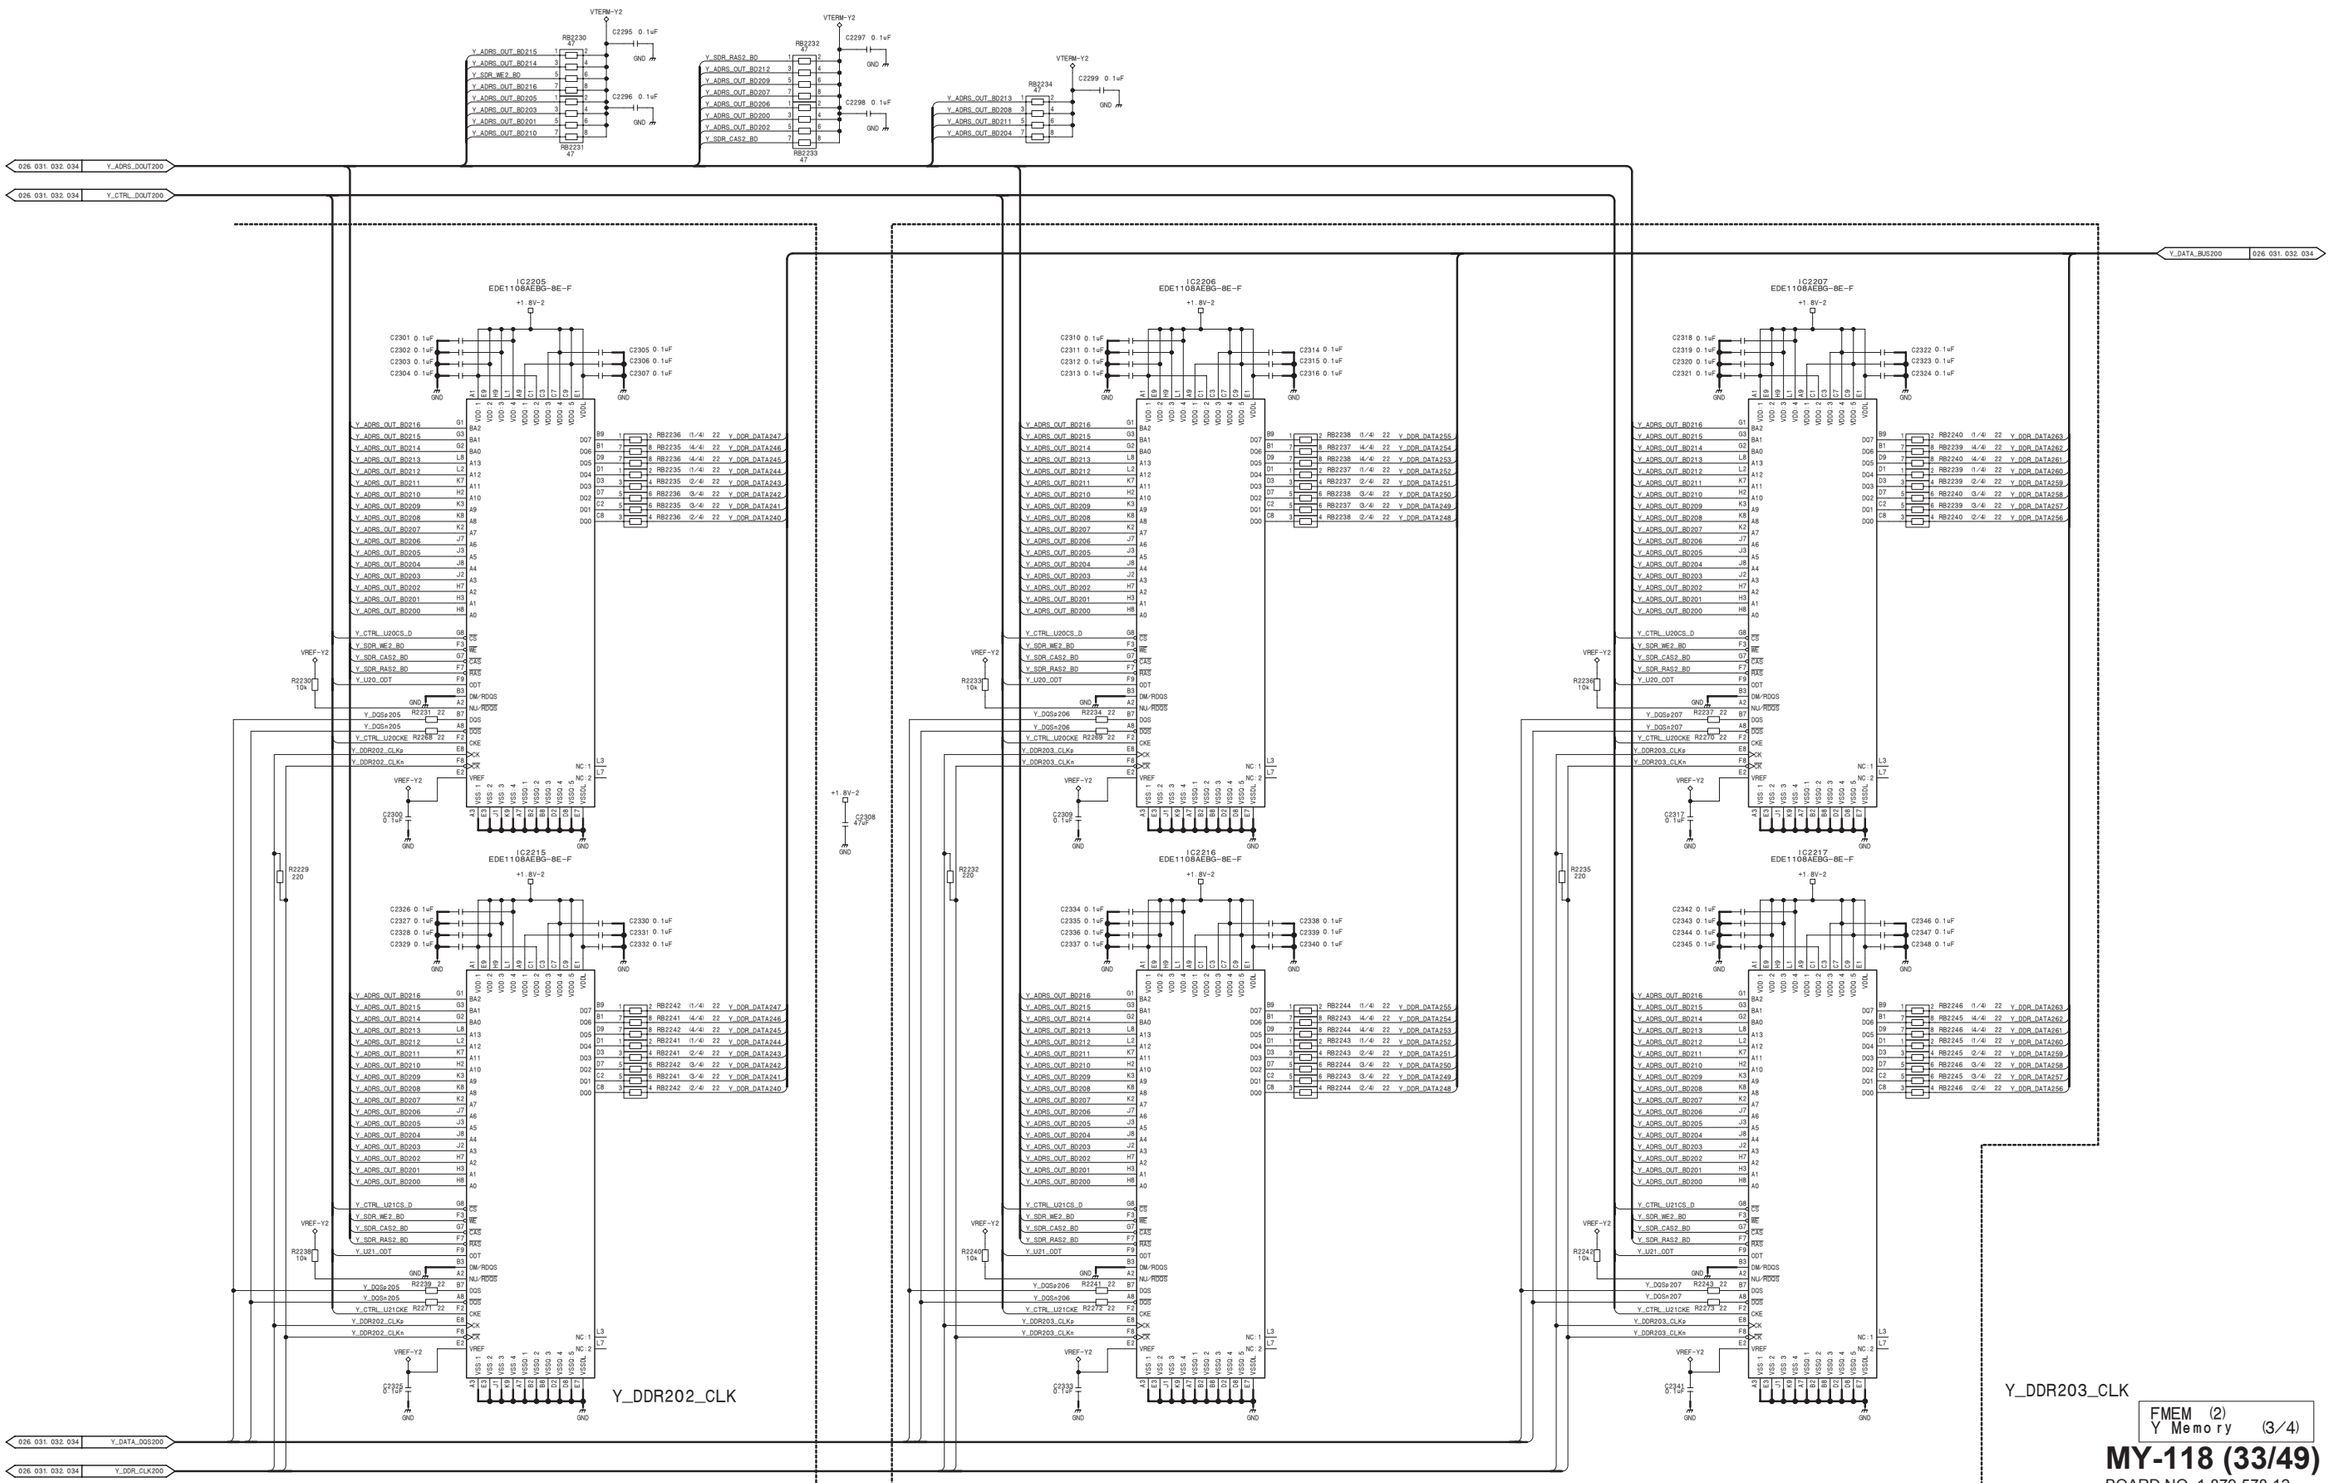
Y_ADRS_OUT200
Y_CTRL_OUT200
Y_DATA_BUS200
Y_DATA_DQS200
Y_DDR_CLK200
IC2205 EDE1108AEBG-8E-F
IC2206 EDE1108AEBG-8E-F
IC2207 EDE1108AEBG-8E-F
IC2215 EDE1108AEBG-8E-F
IC2216 EDE1108AEBG-8E-F
IC2217 EDE1108AEBG-8E-F
+1.8V-2
VREF-Y2
VTERM-Y2
Y_DDR202_CLK
Y_DDR203_CLK
FMEM (2)
Y Memory (3/4)
MY-118 (33/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_33

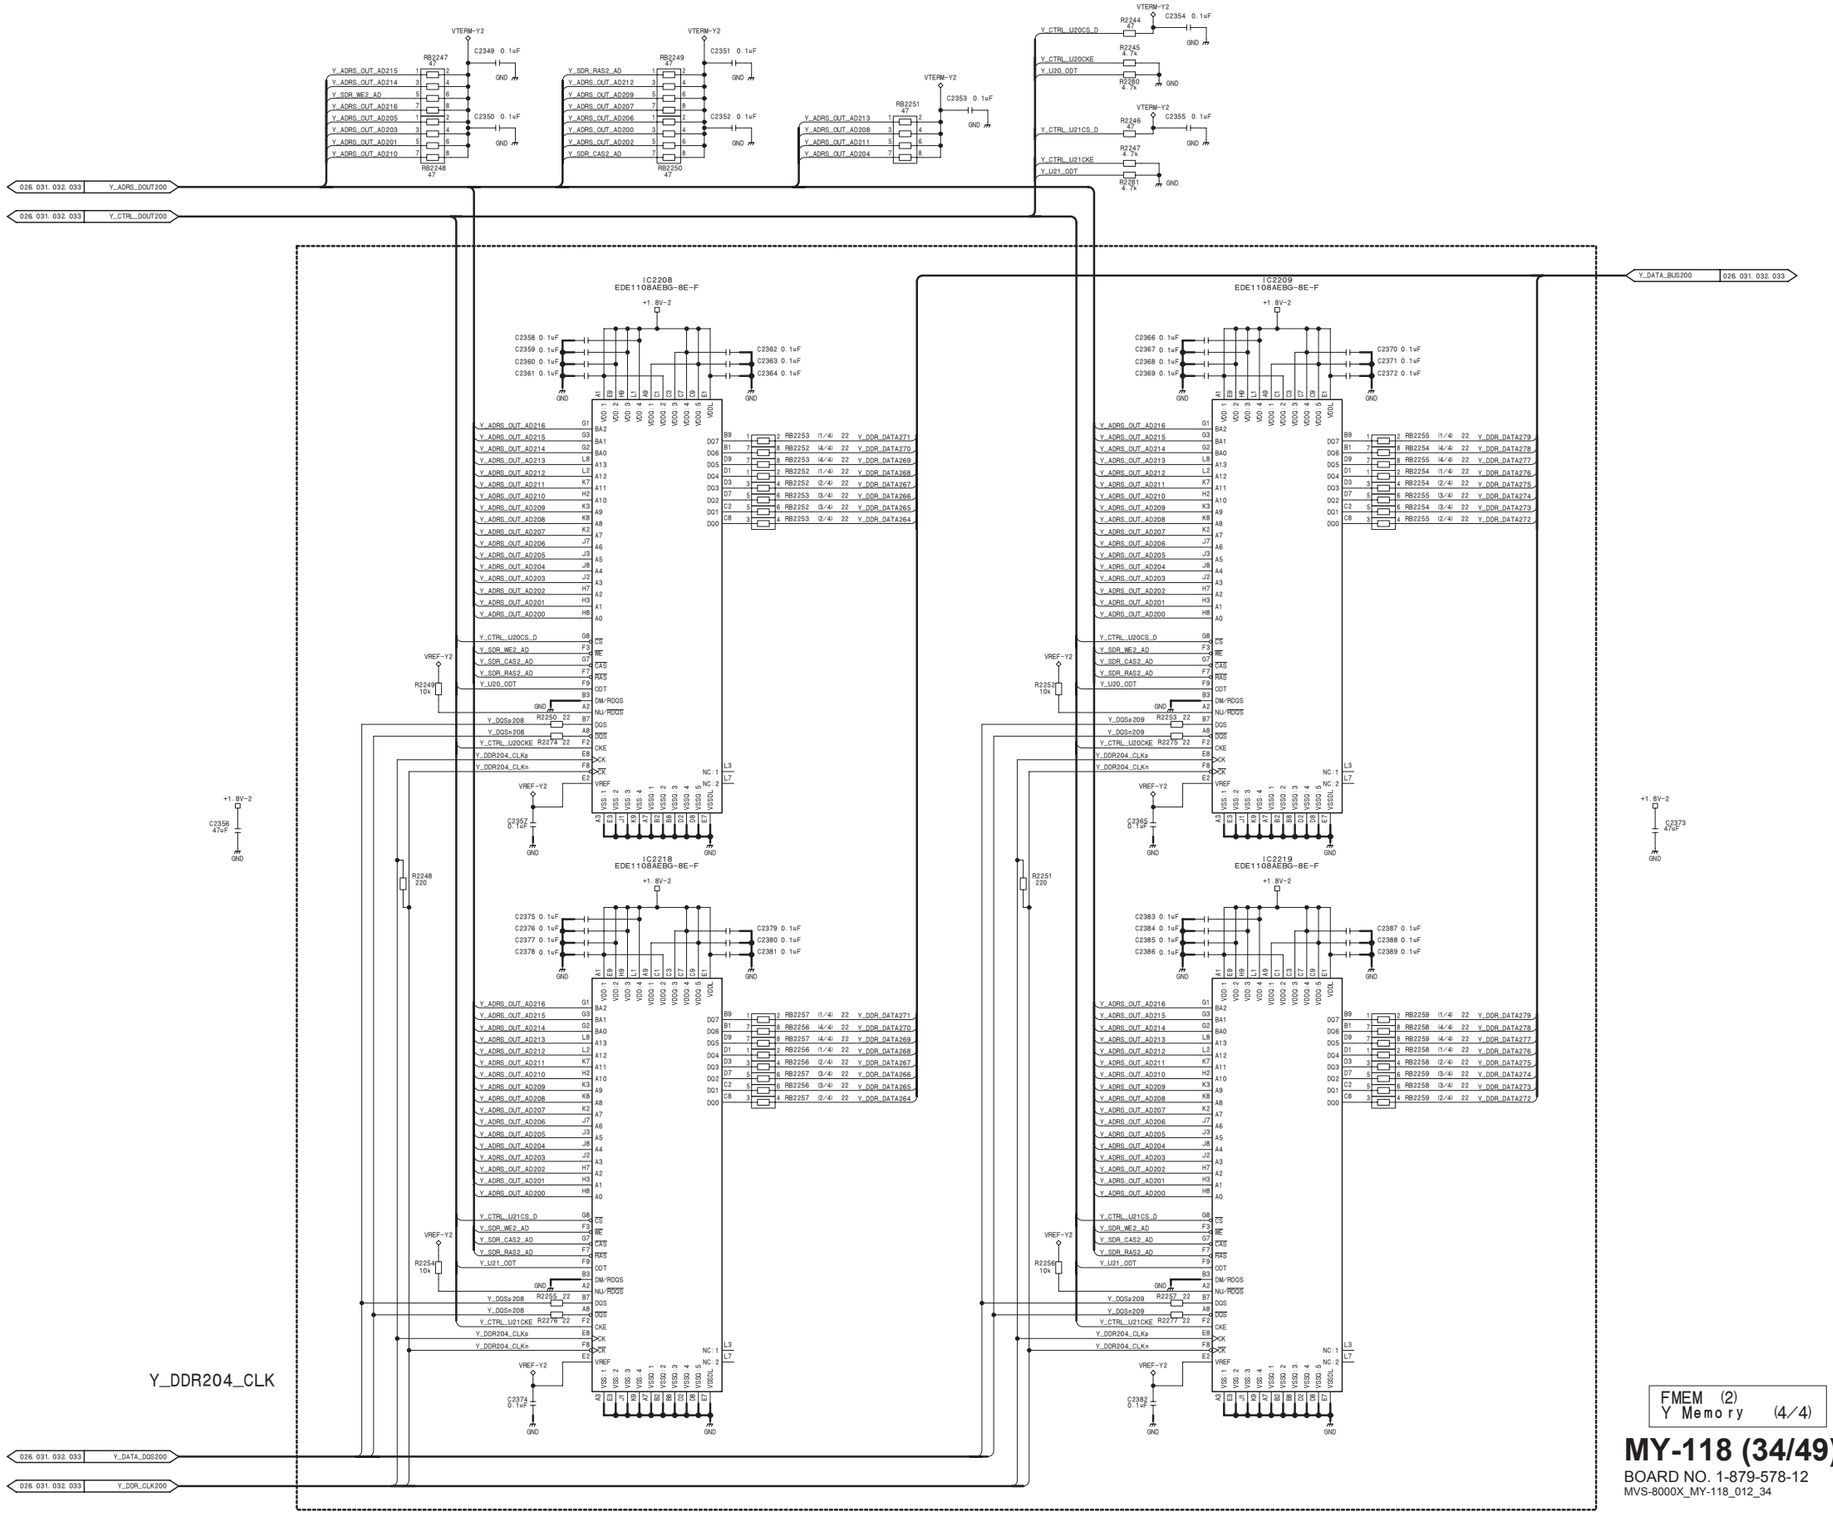

FMEM (2)
Y Memory (4/4)

MY-118 (34/49)

BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_34

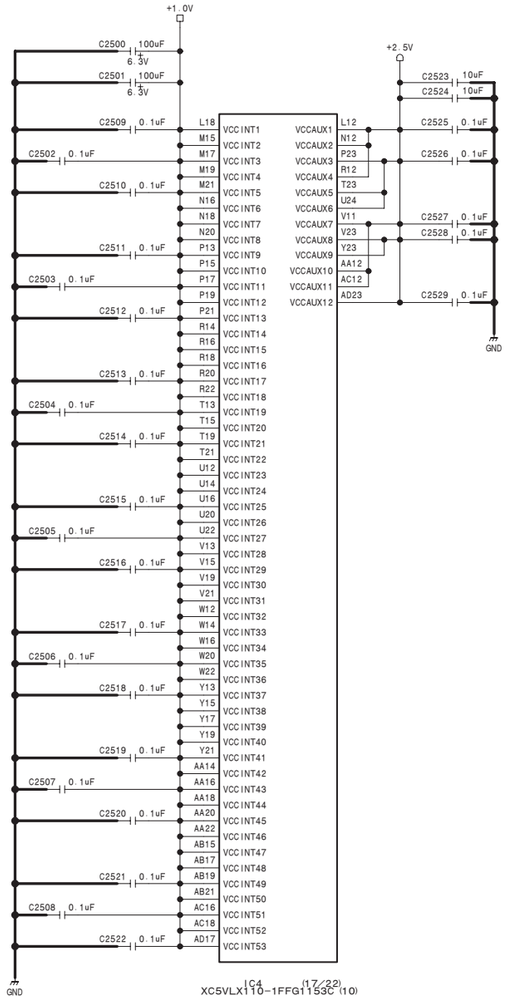

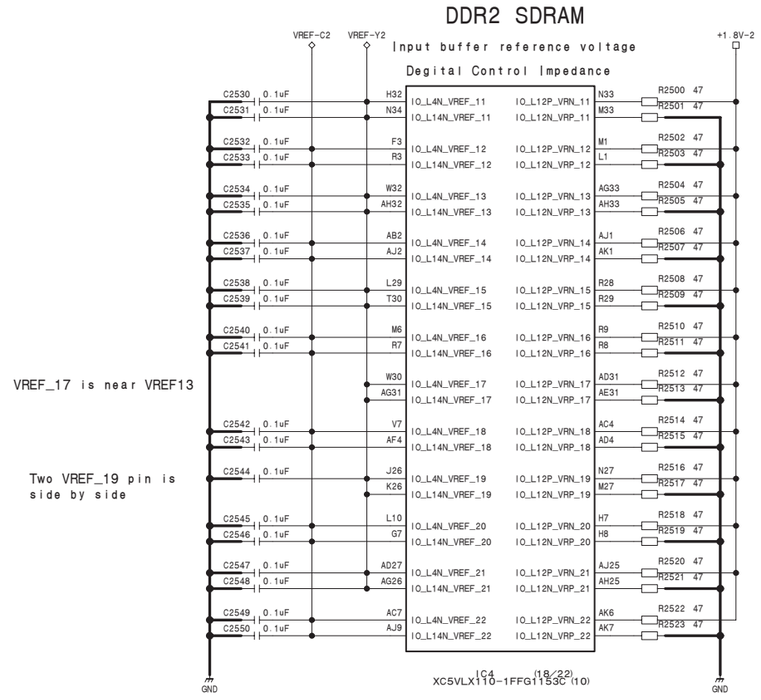

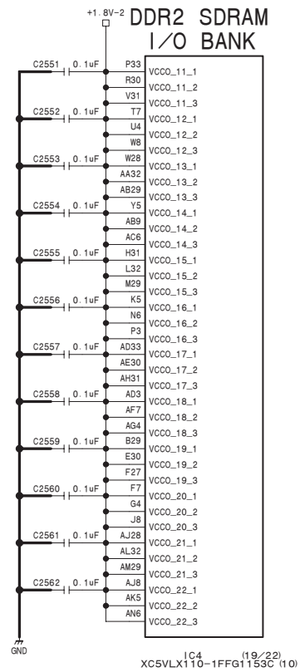



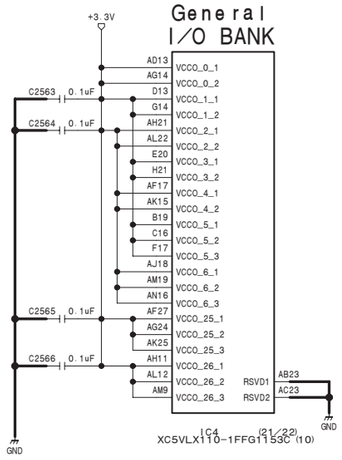

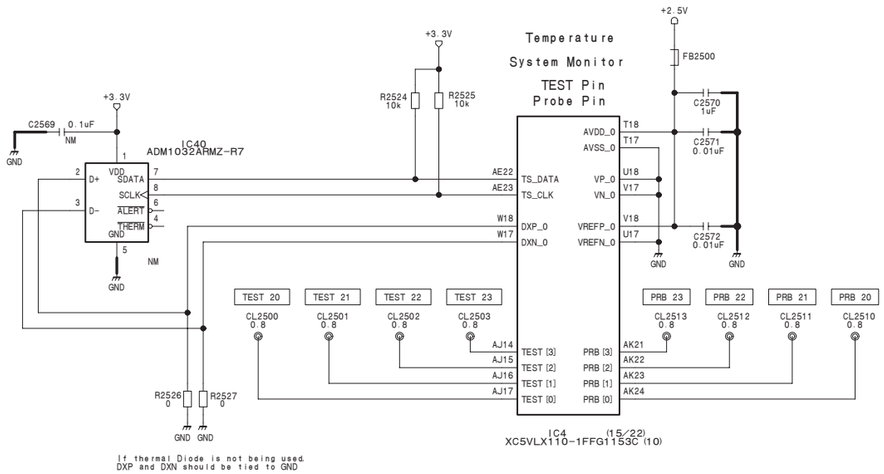

FMEM (2)
Vcc (INT, AUX, VREF, out)
DDR2 SDRAM Power & DCI
System Monitor

MY-118 (35/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_35

MY-118 (36/49)

SUFFIX: -12

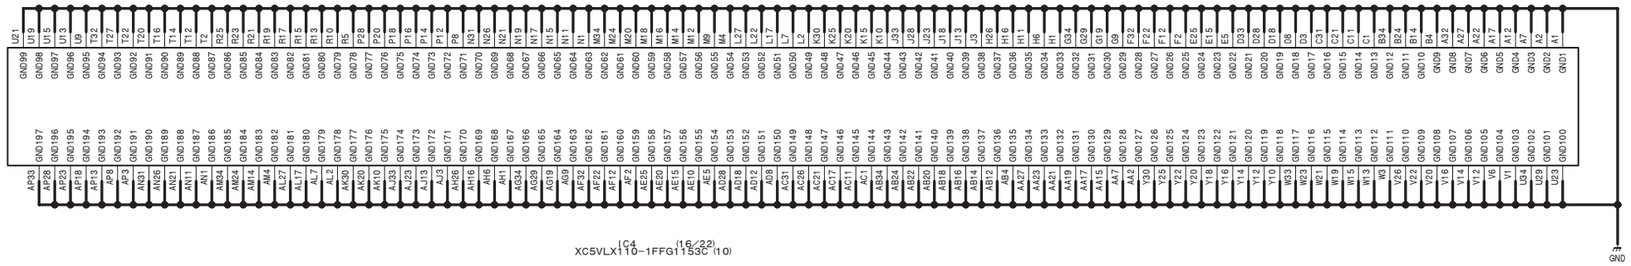

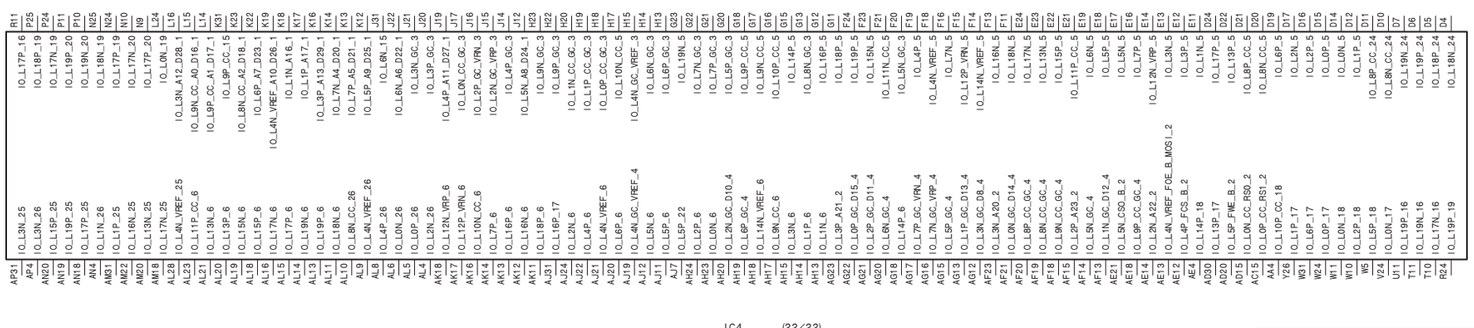

FMEM (2)
GND & Unused Pins

Delete this page

MY-118 (36/49)

BOARD NO. 1-879-578-12

MVS-8000X_MY-118_012_36

MY-118 (37/49)

BOARD NO. 1-879-578-12

MVS-8000X_MY-118_012_37

MY-118 (38/49) SUFFIX: -12

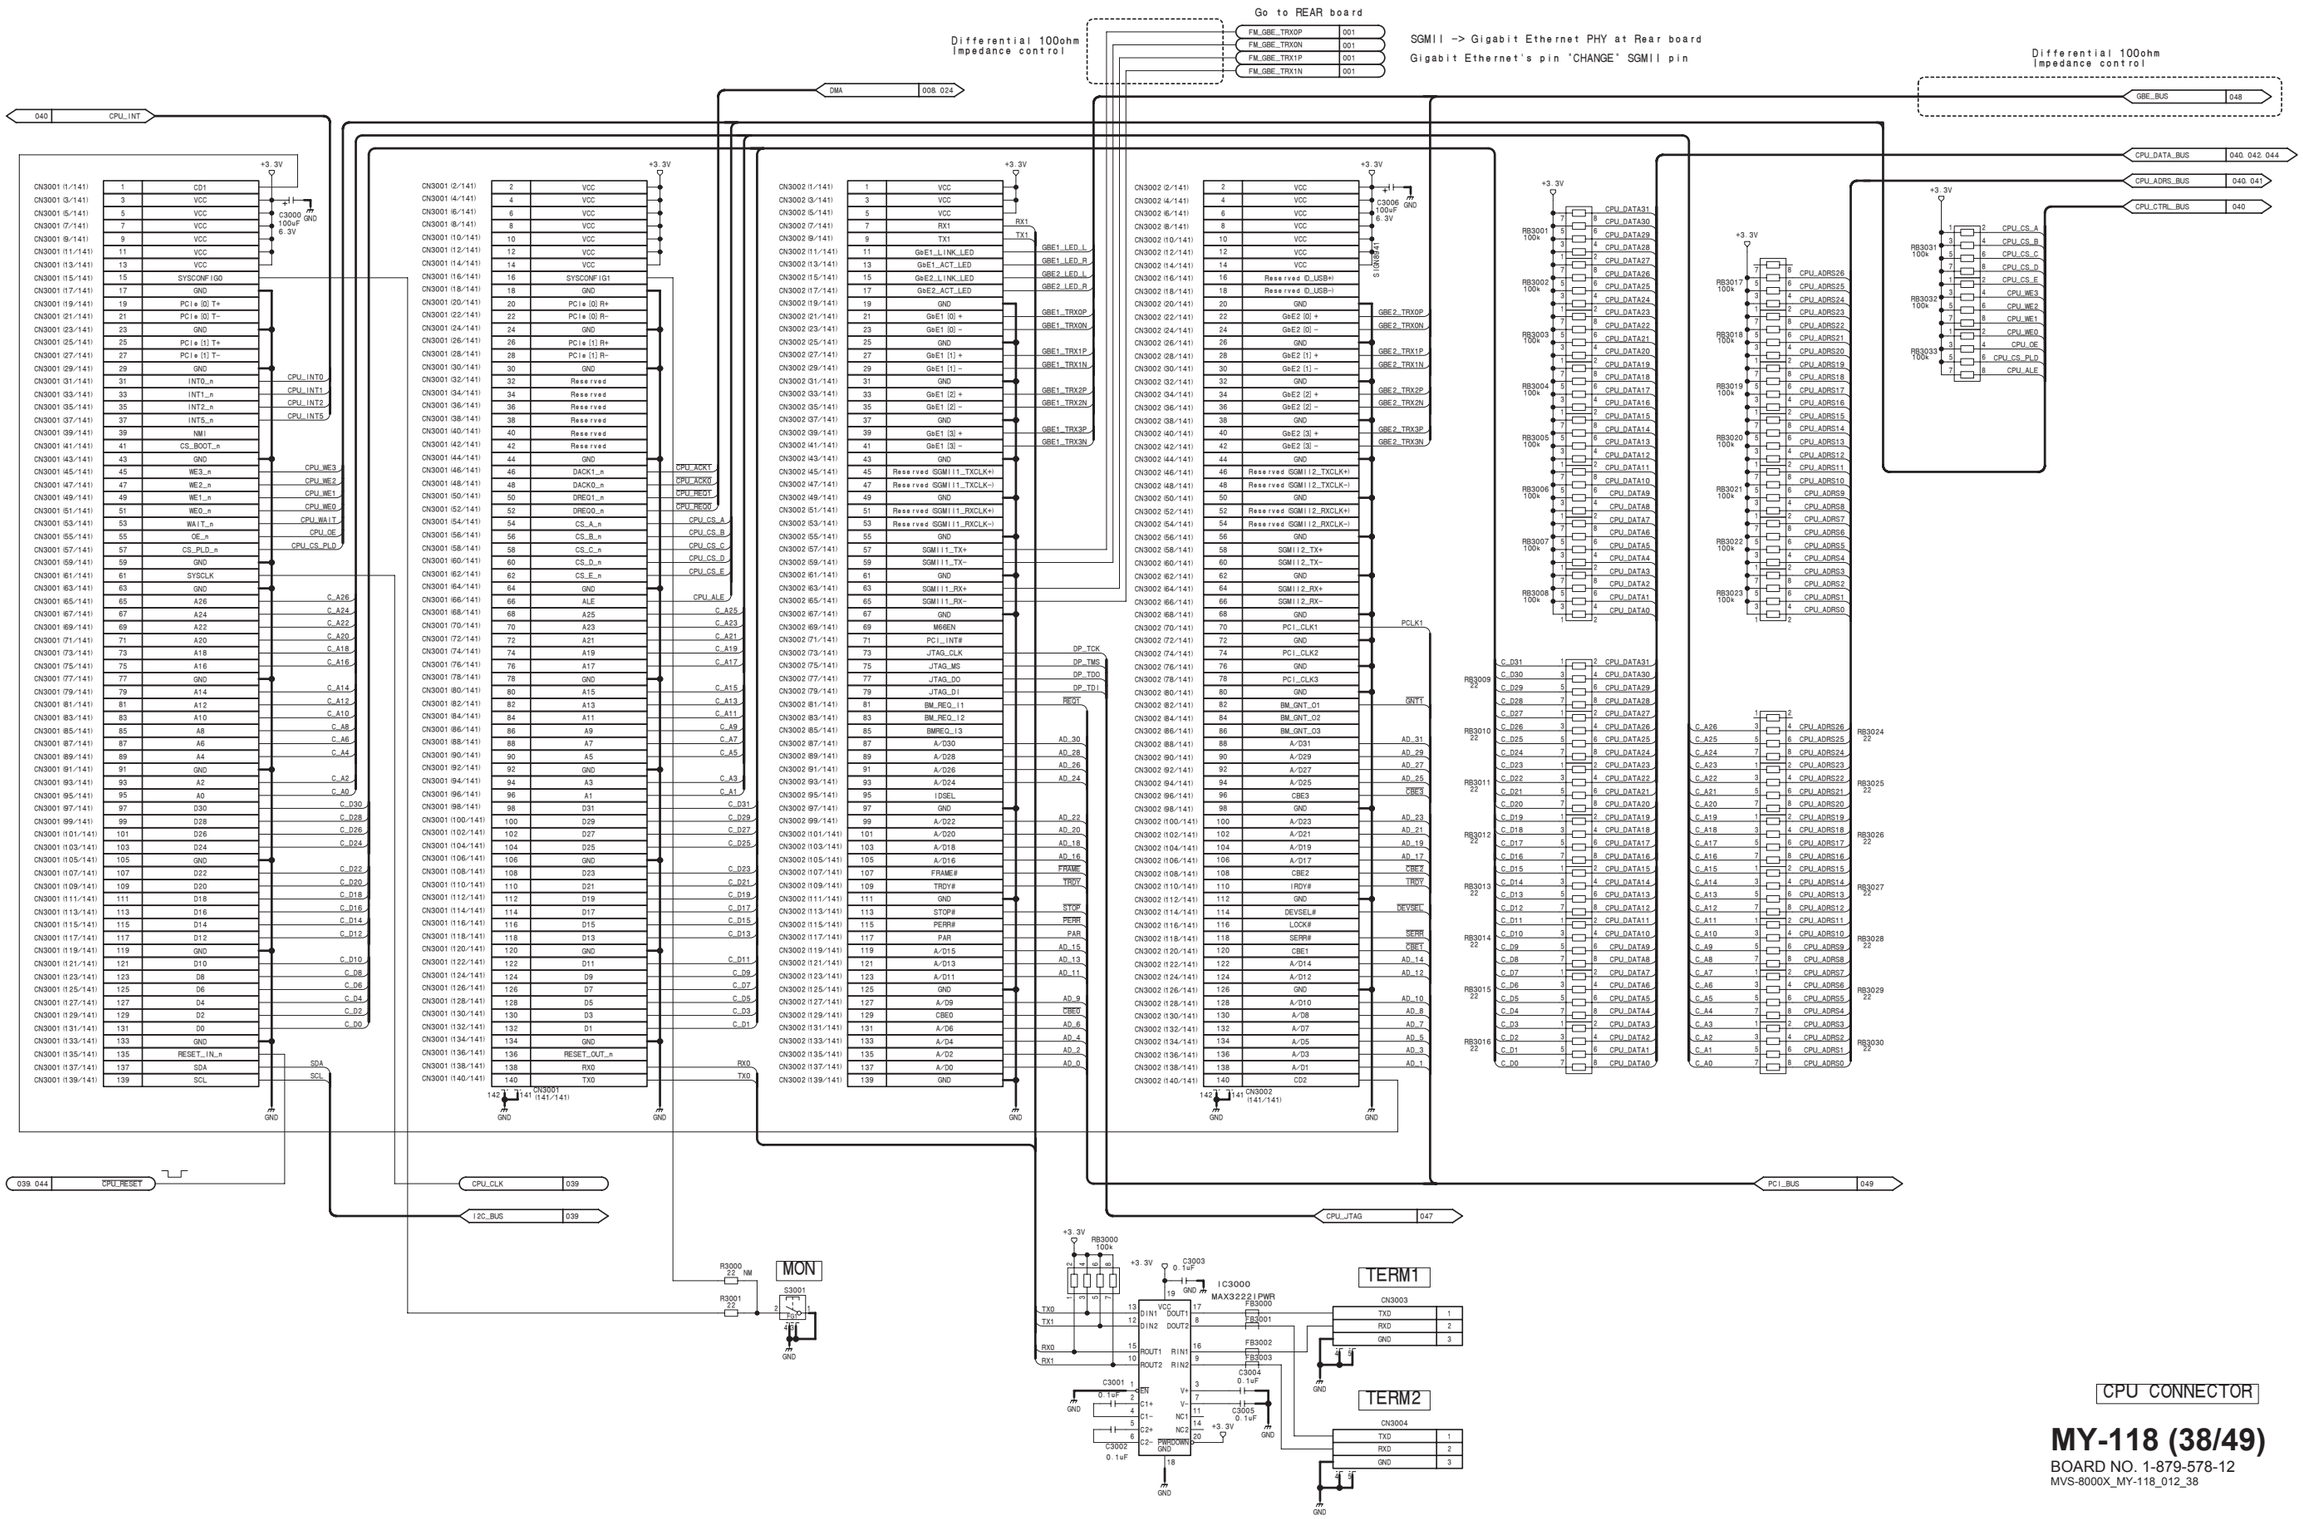

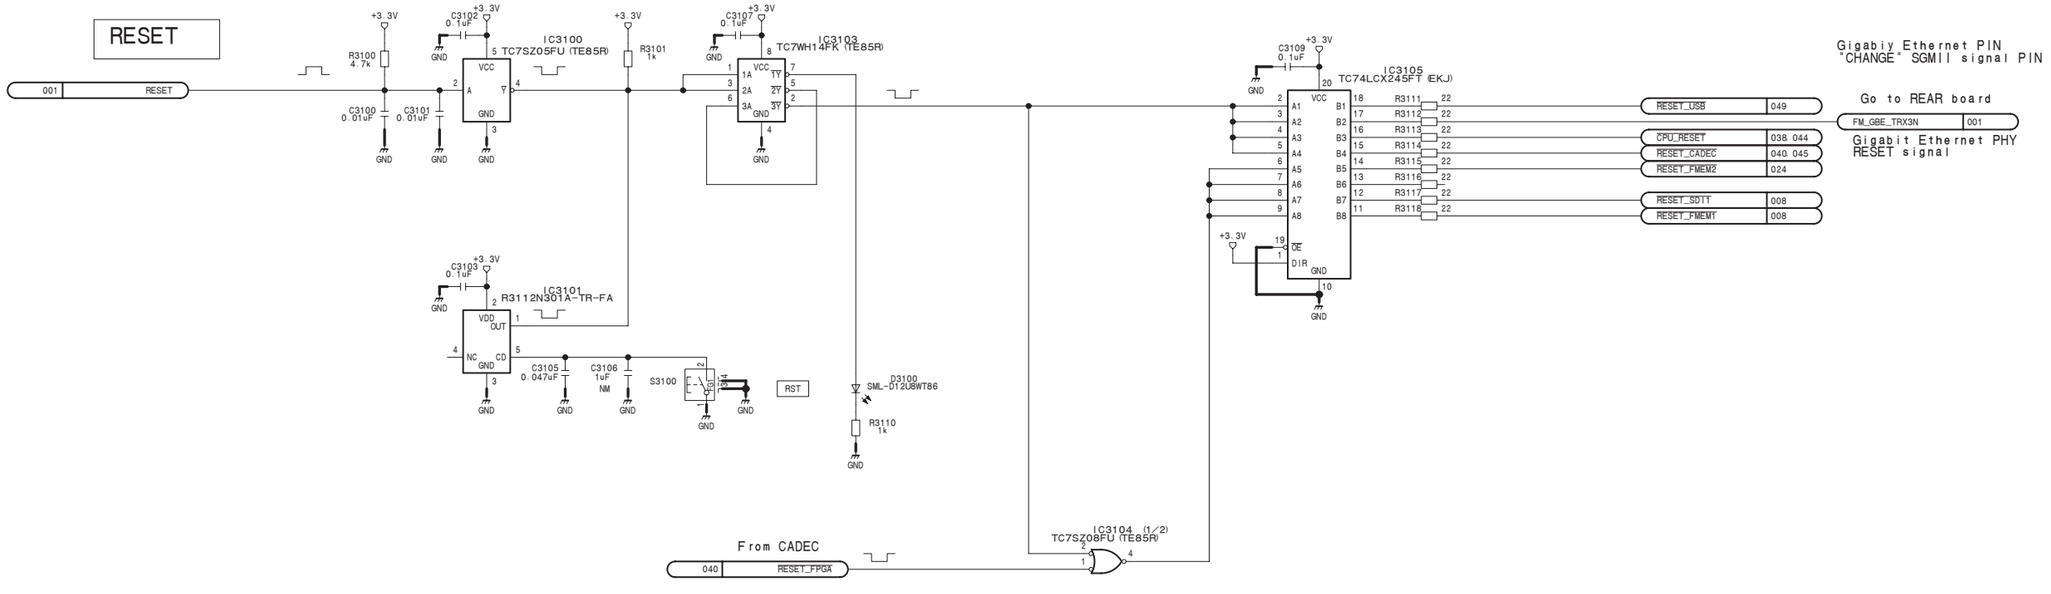

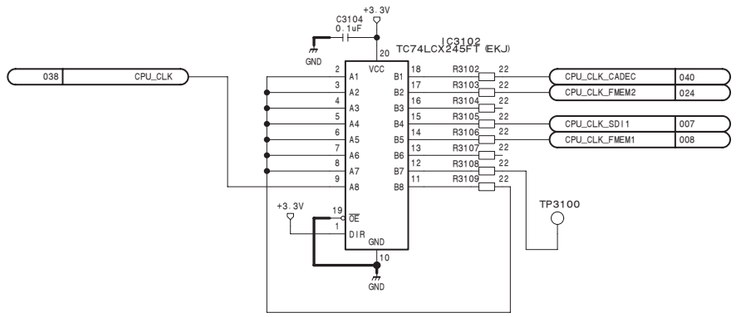

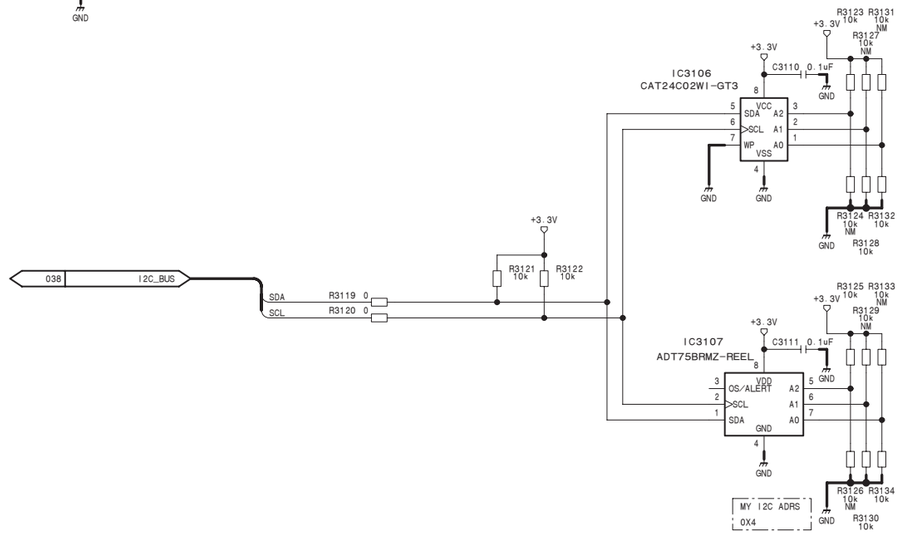

RESET circuit
CPU Clock buffer
I2C EEPROM & Temperature

MY-118 (39/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_39

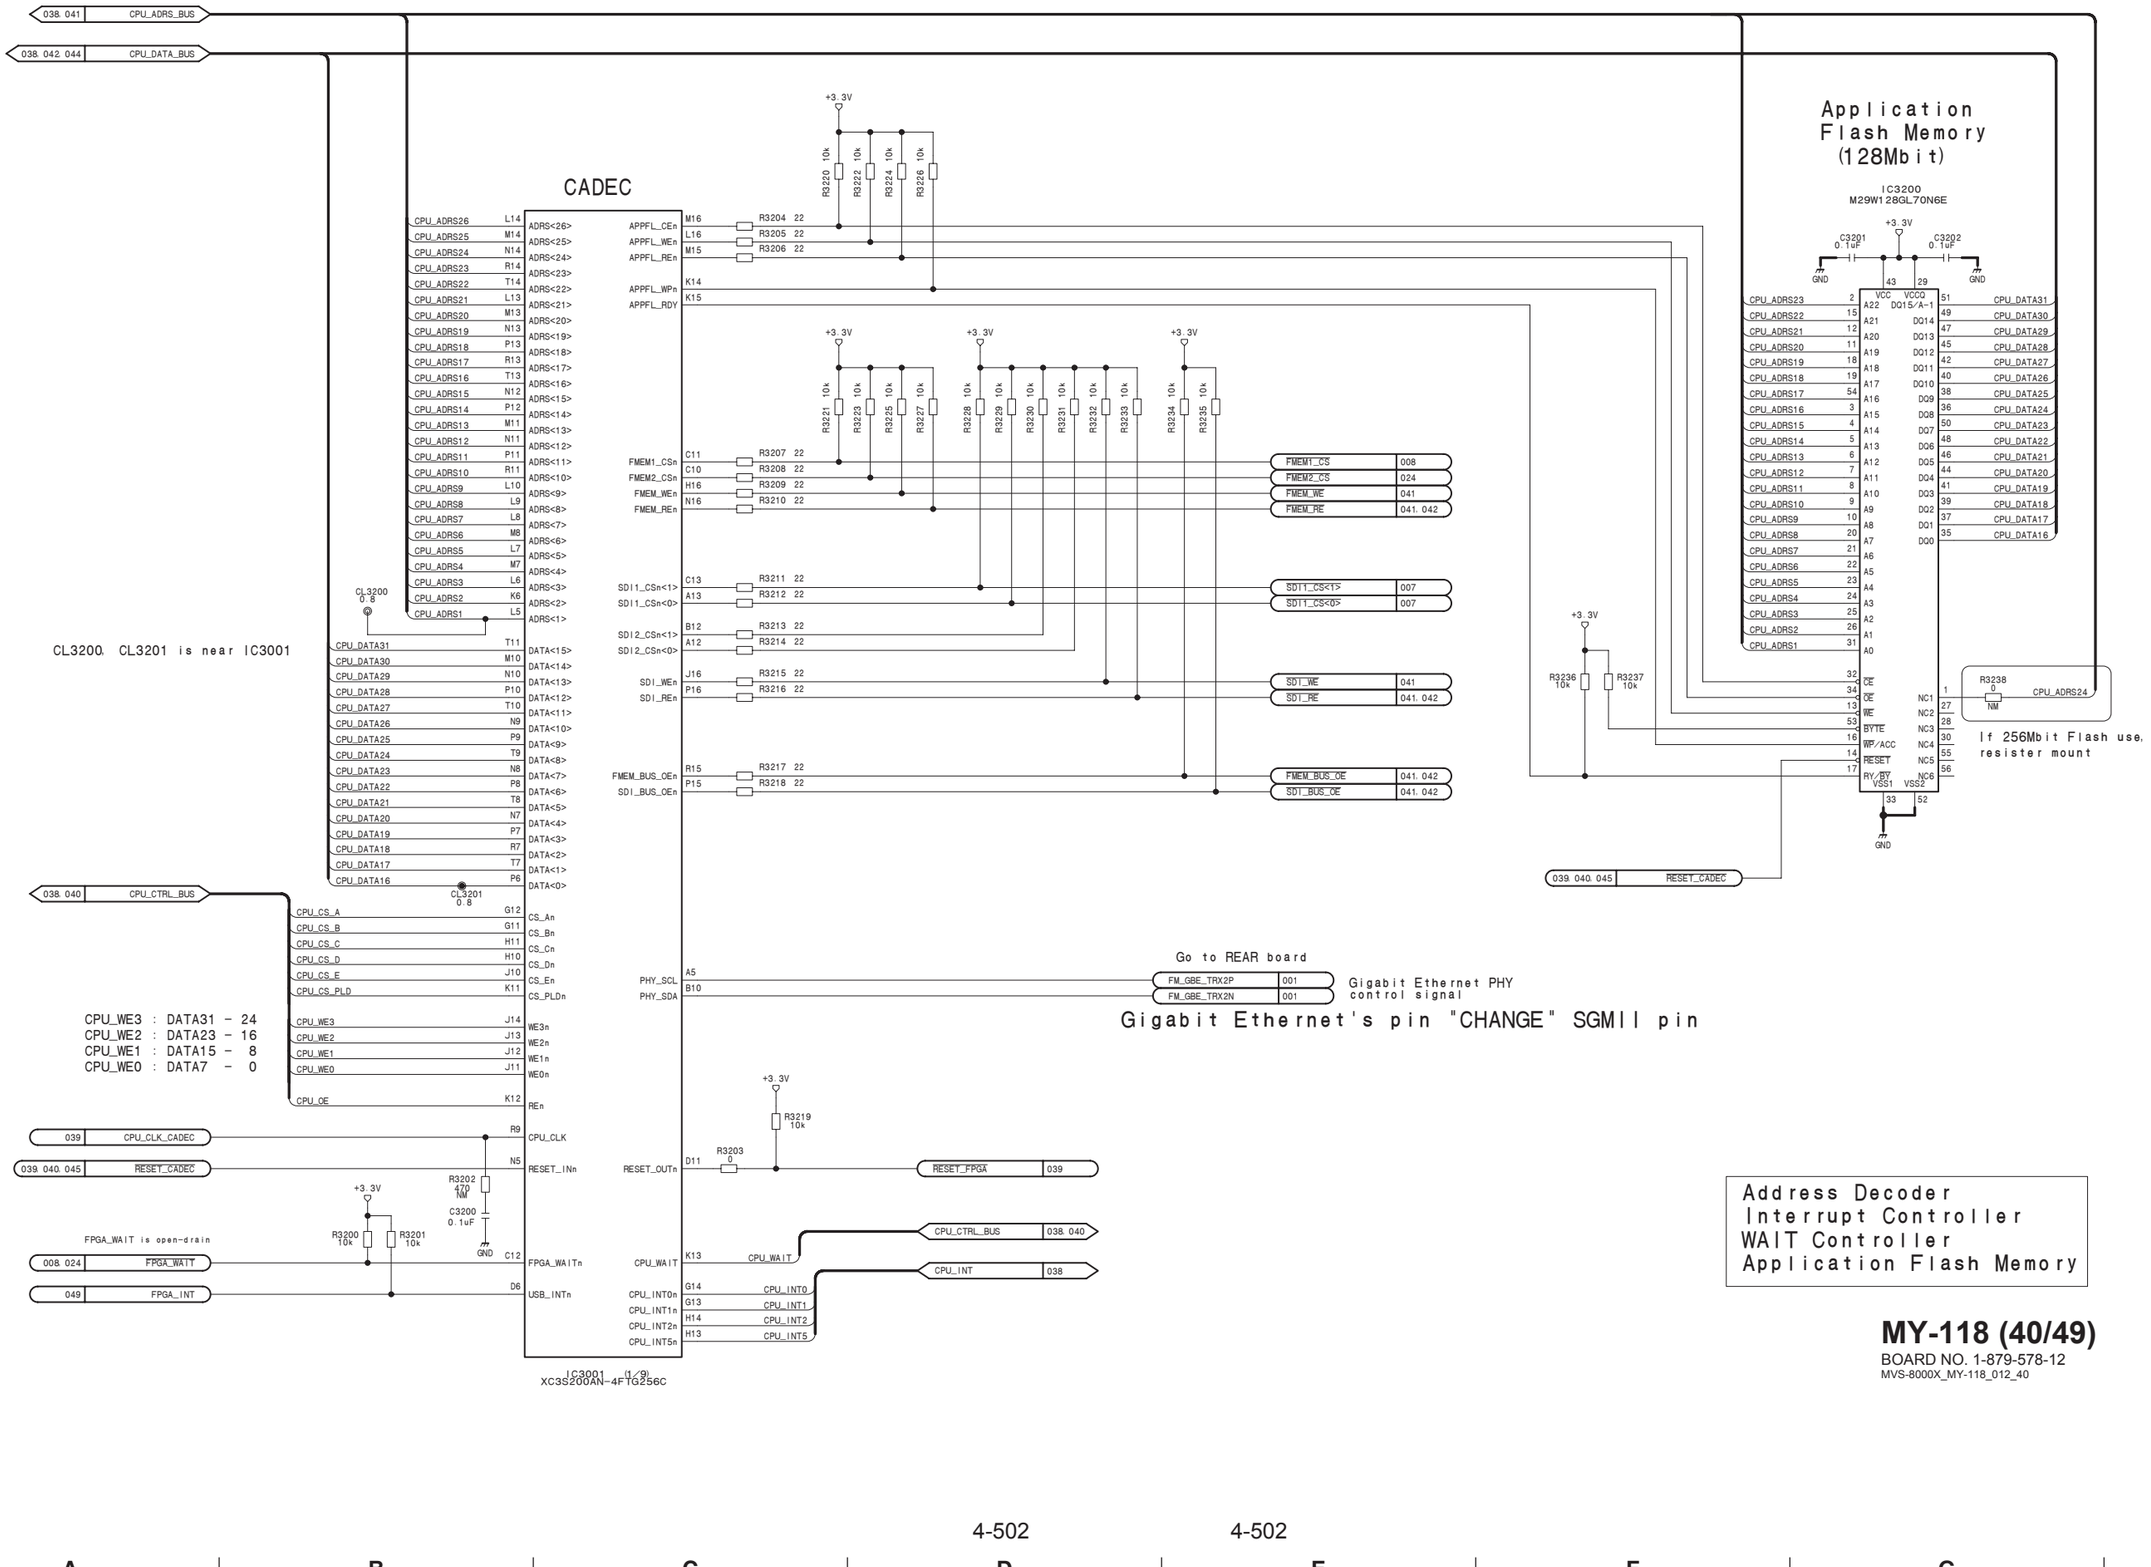

MY-118 (40/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_40

MFSDIx
Address Bus Buffer

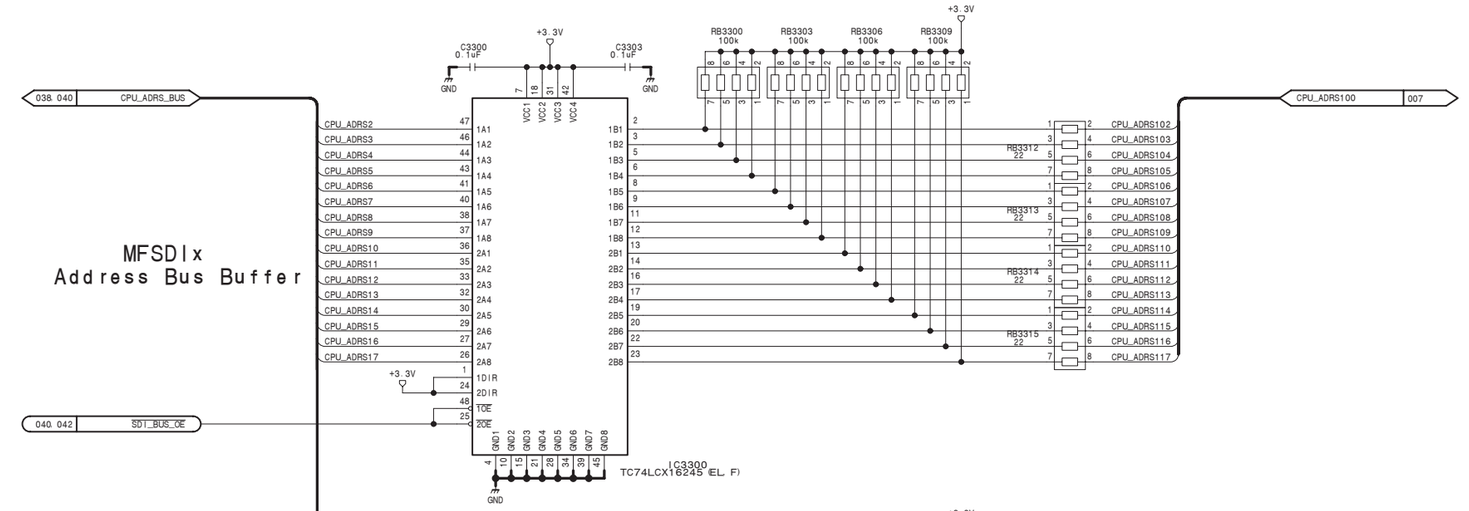

FMEM
Address Bus Buffer

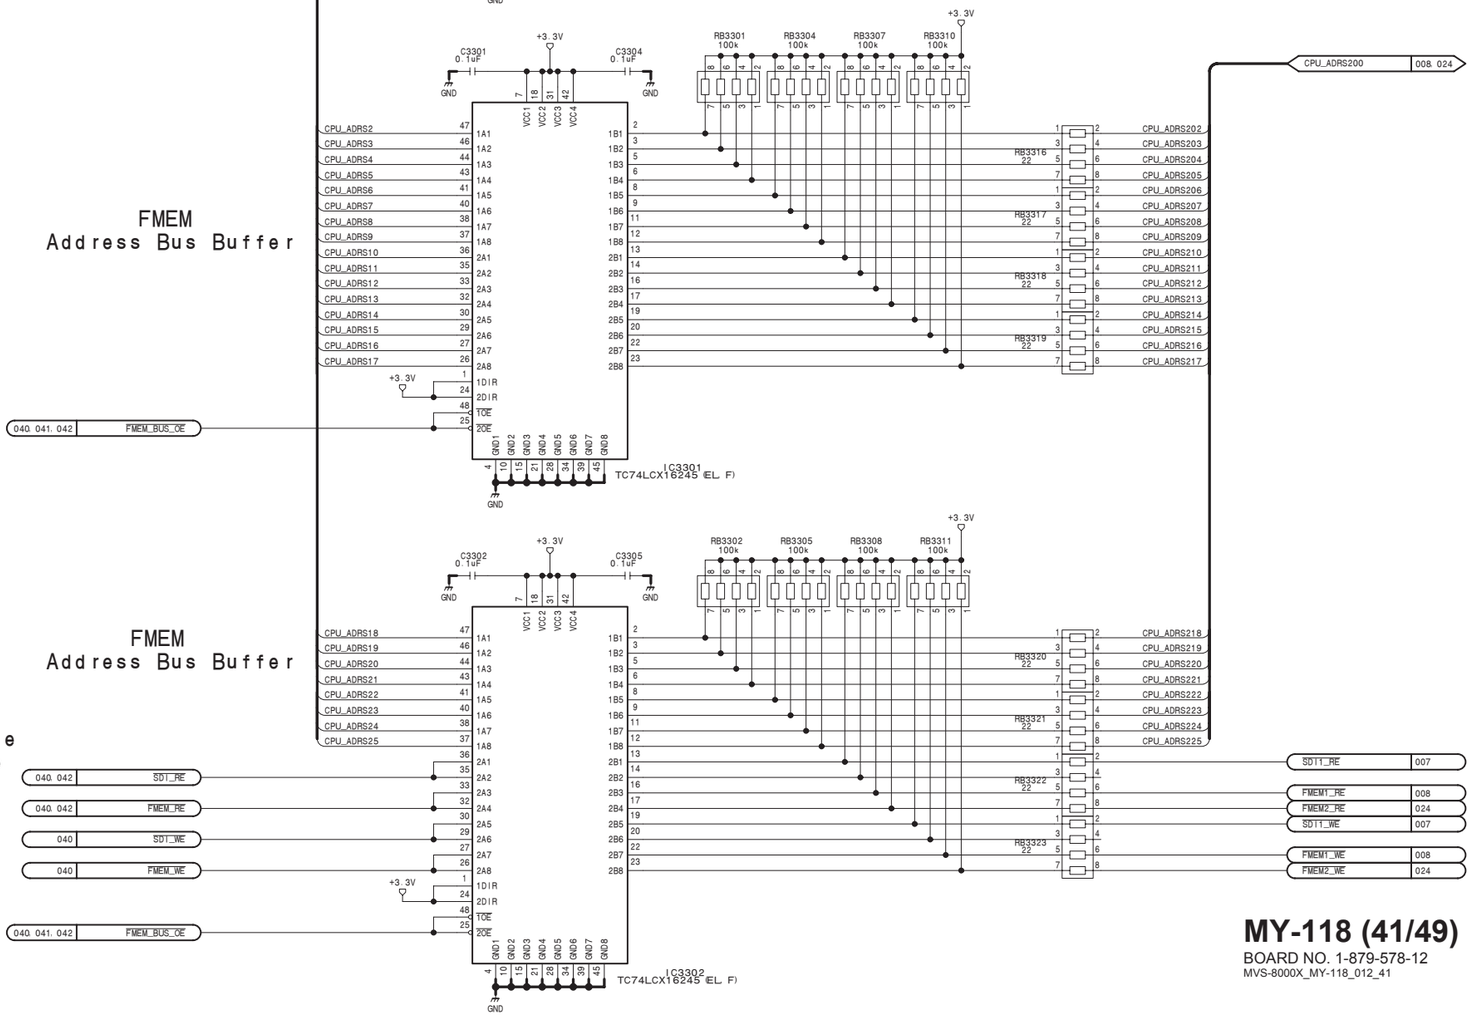

FMEM
Address Bus Buffer

Write Enable
Read Enable
Buffer

MY-118 (41/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_41

MY-118 (42/49)
SUFFIX: -12

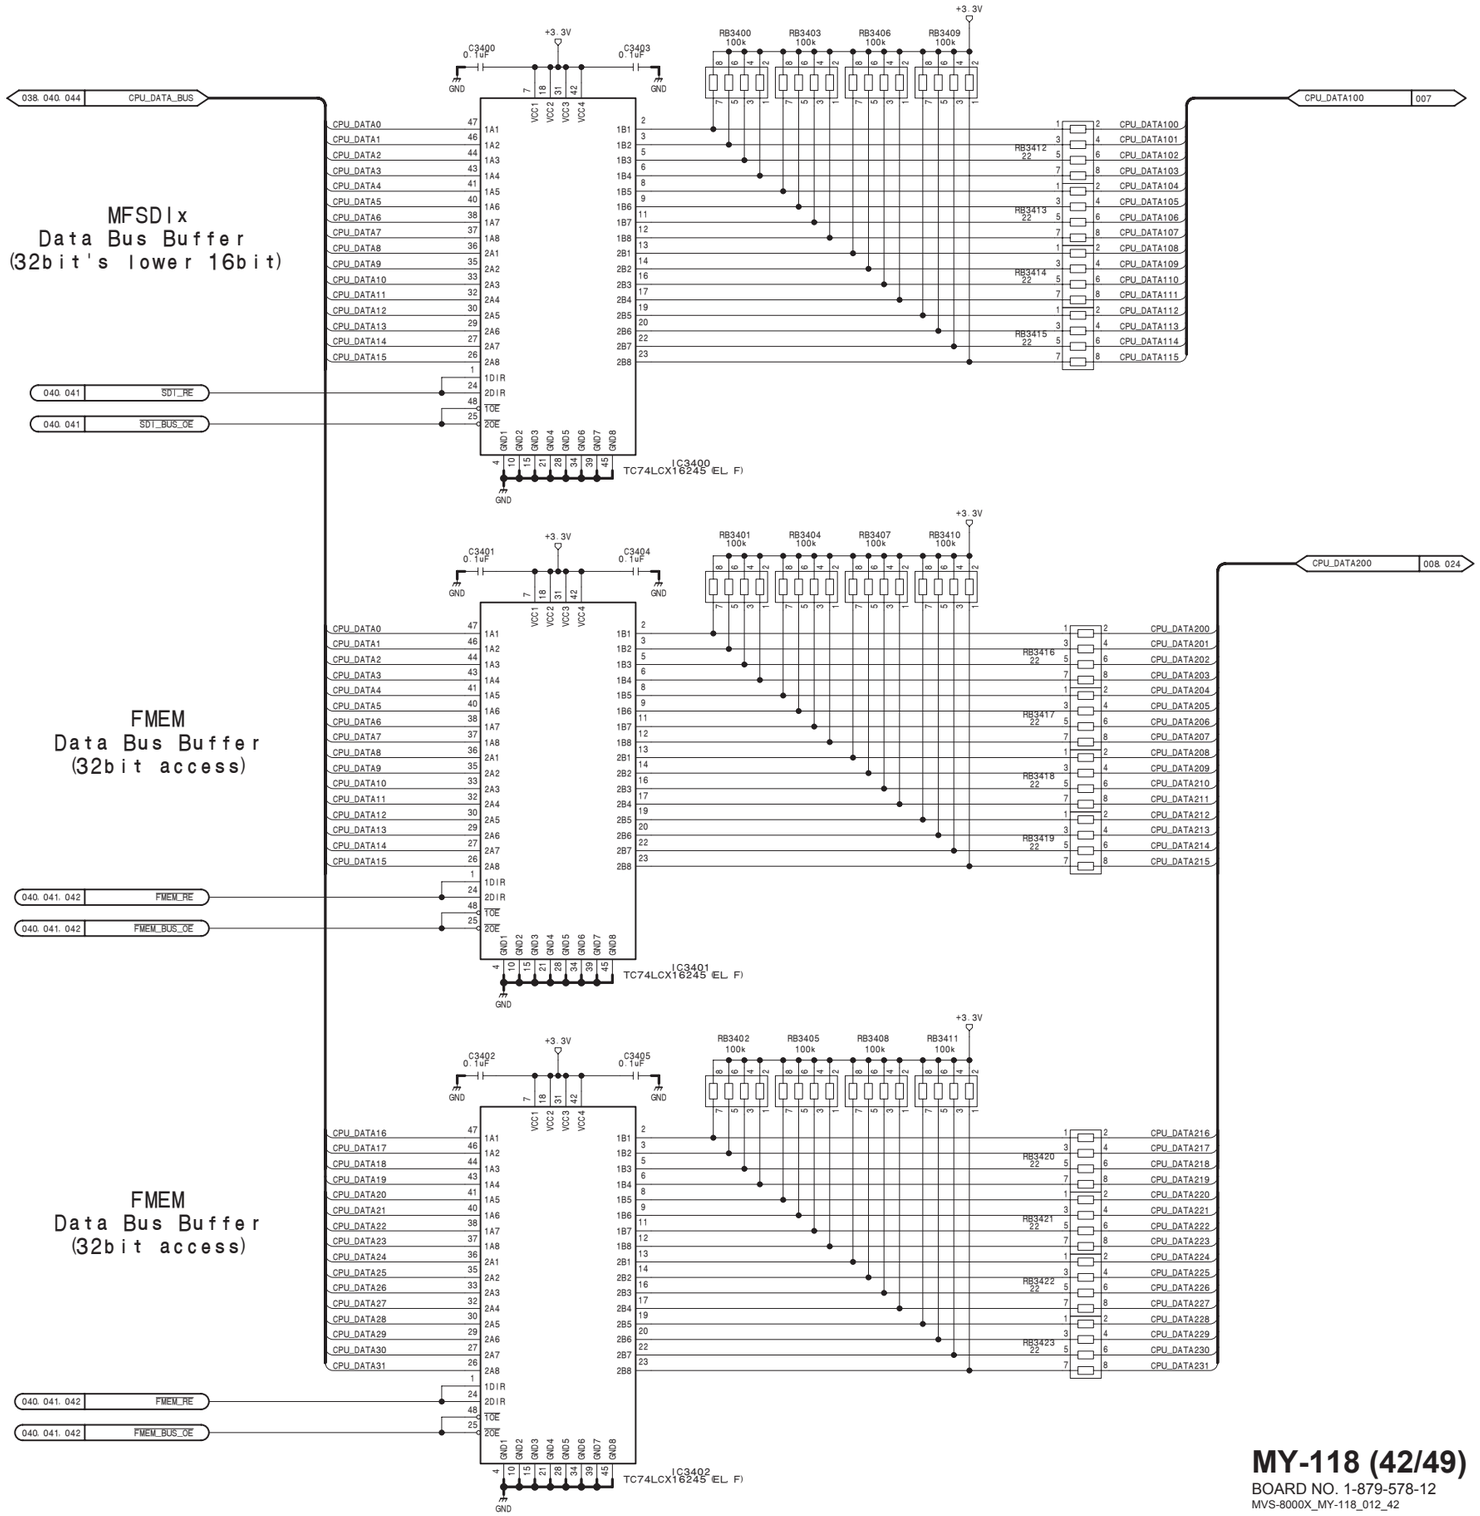

MY-118 (42/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_42

4-504

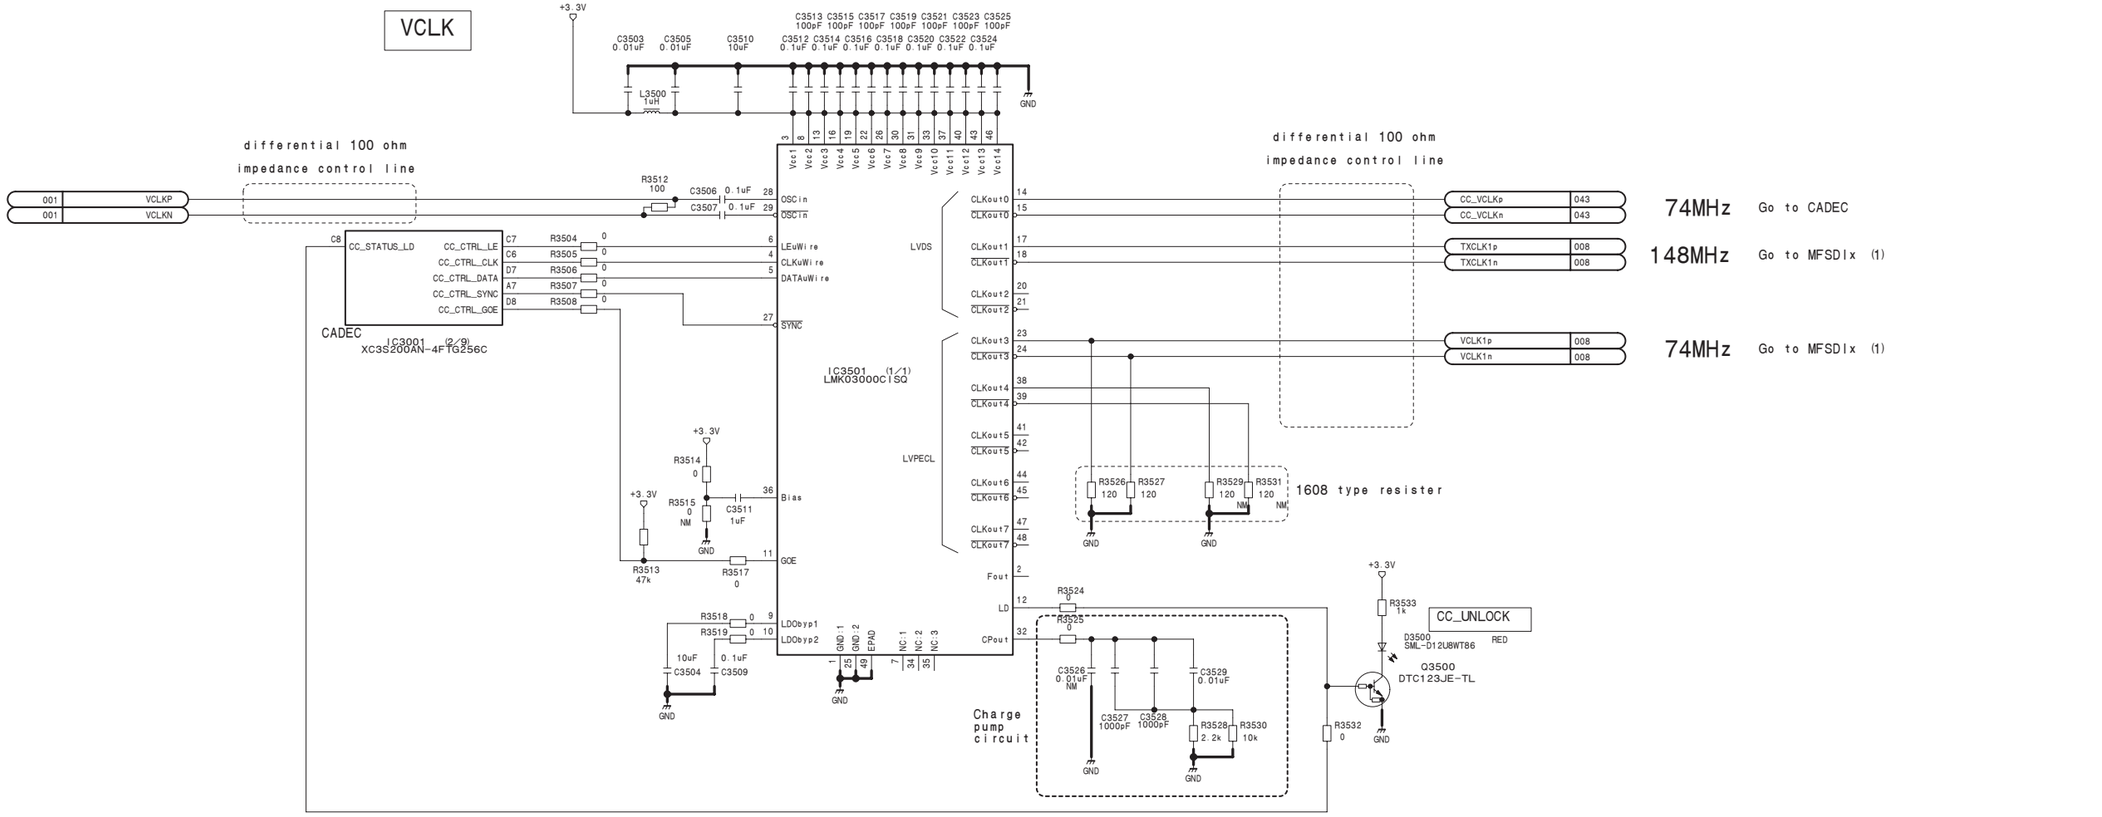

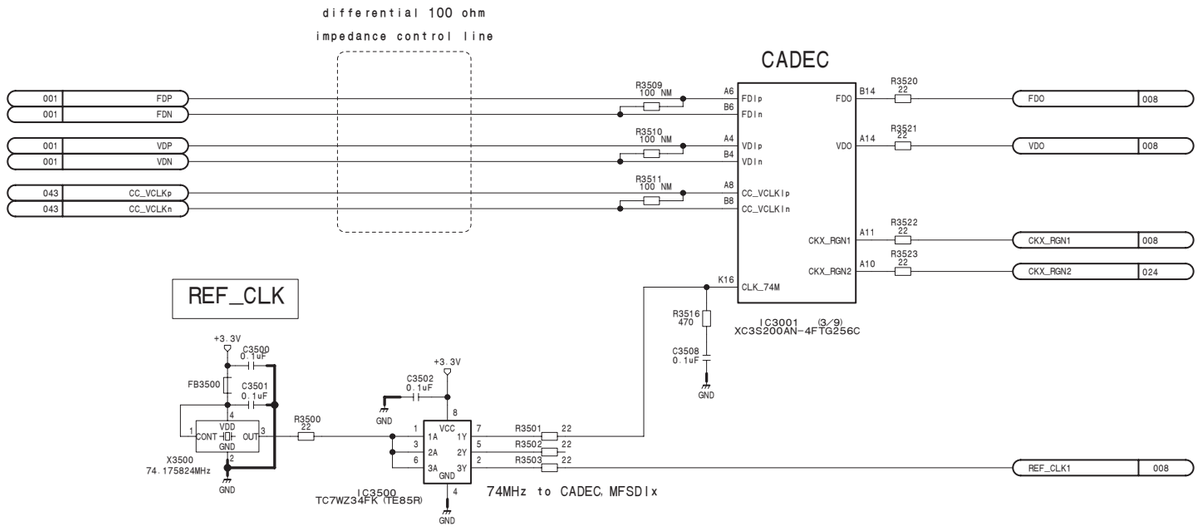

MY-118 (43/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_43

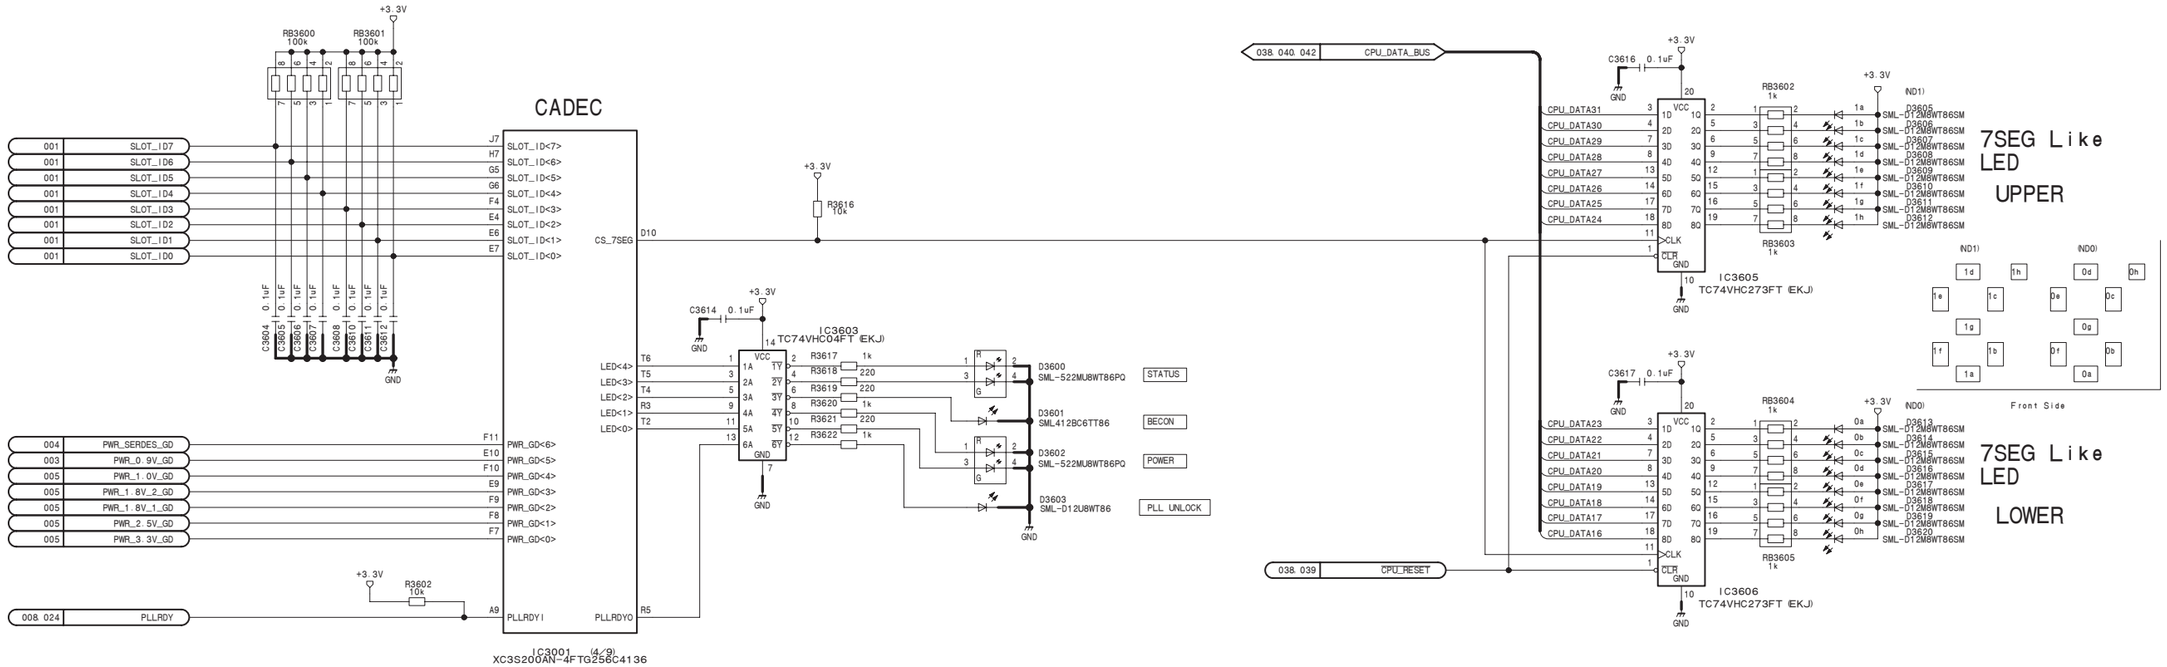

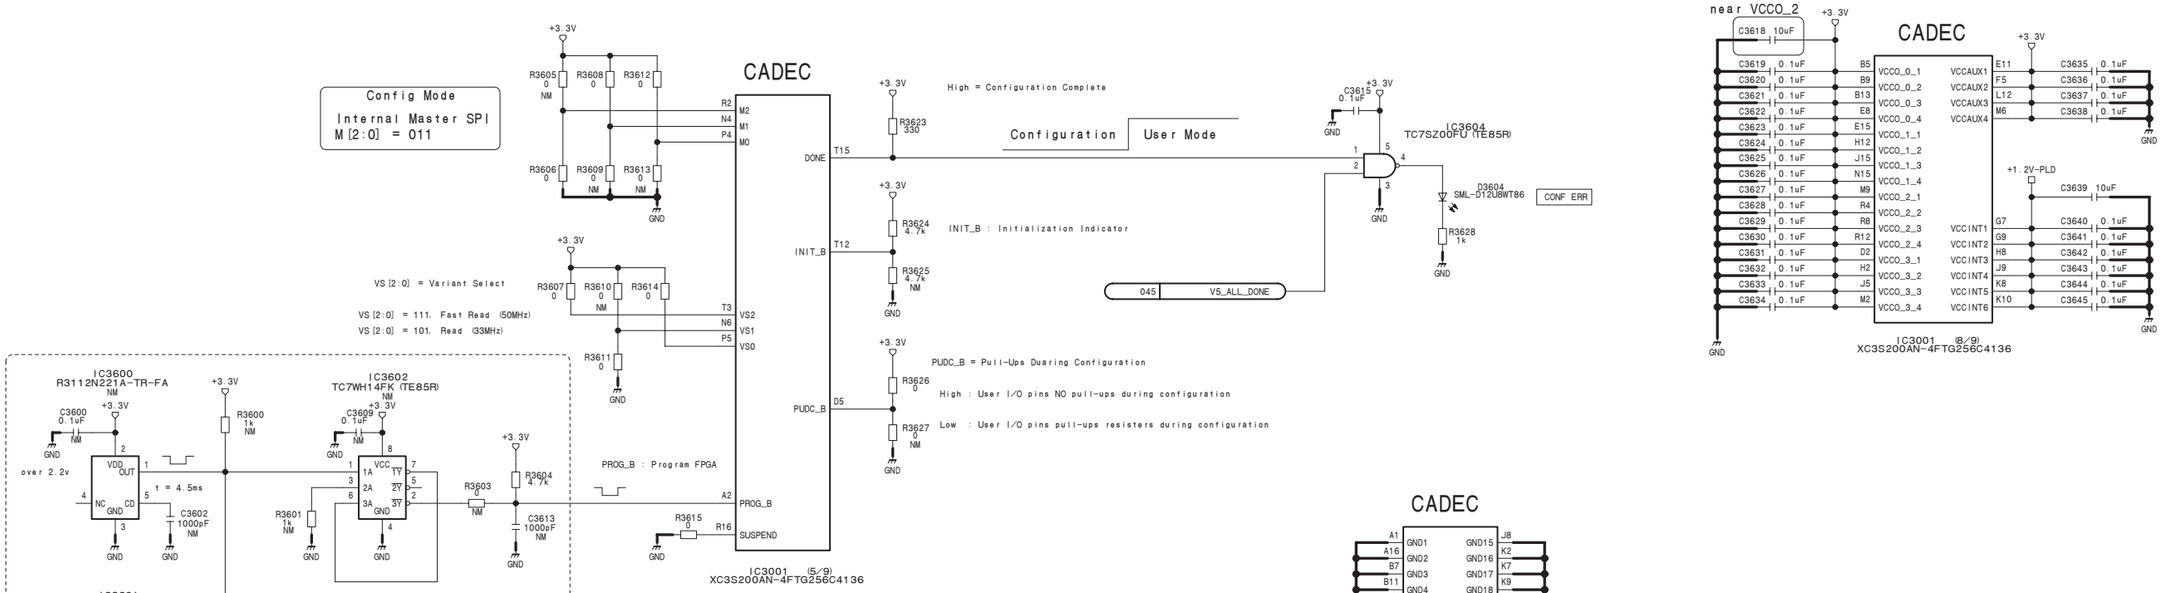



CADEC
SLOT ID, Power Status, LEDs
CADEC Power On circuit

MY-118 (44/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_44

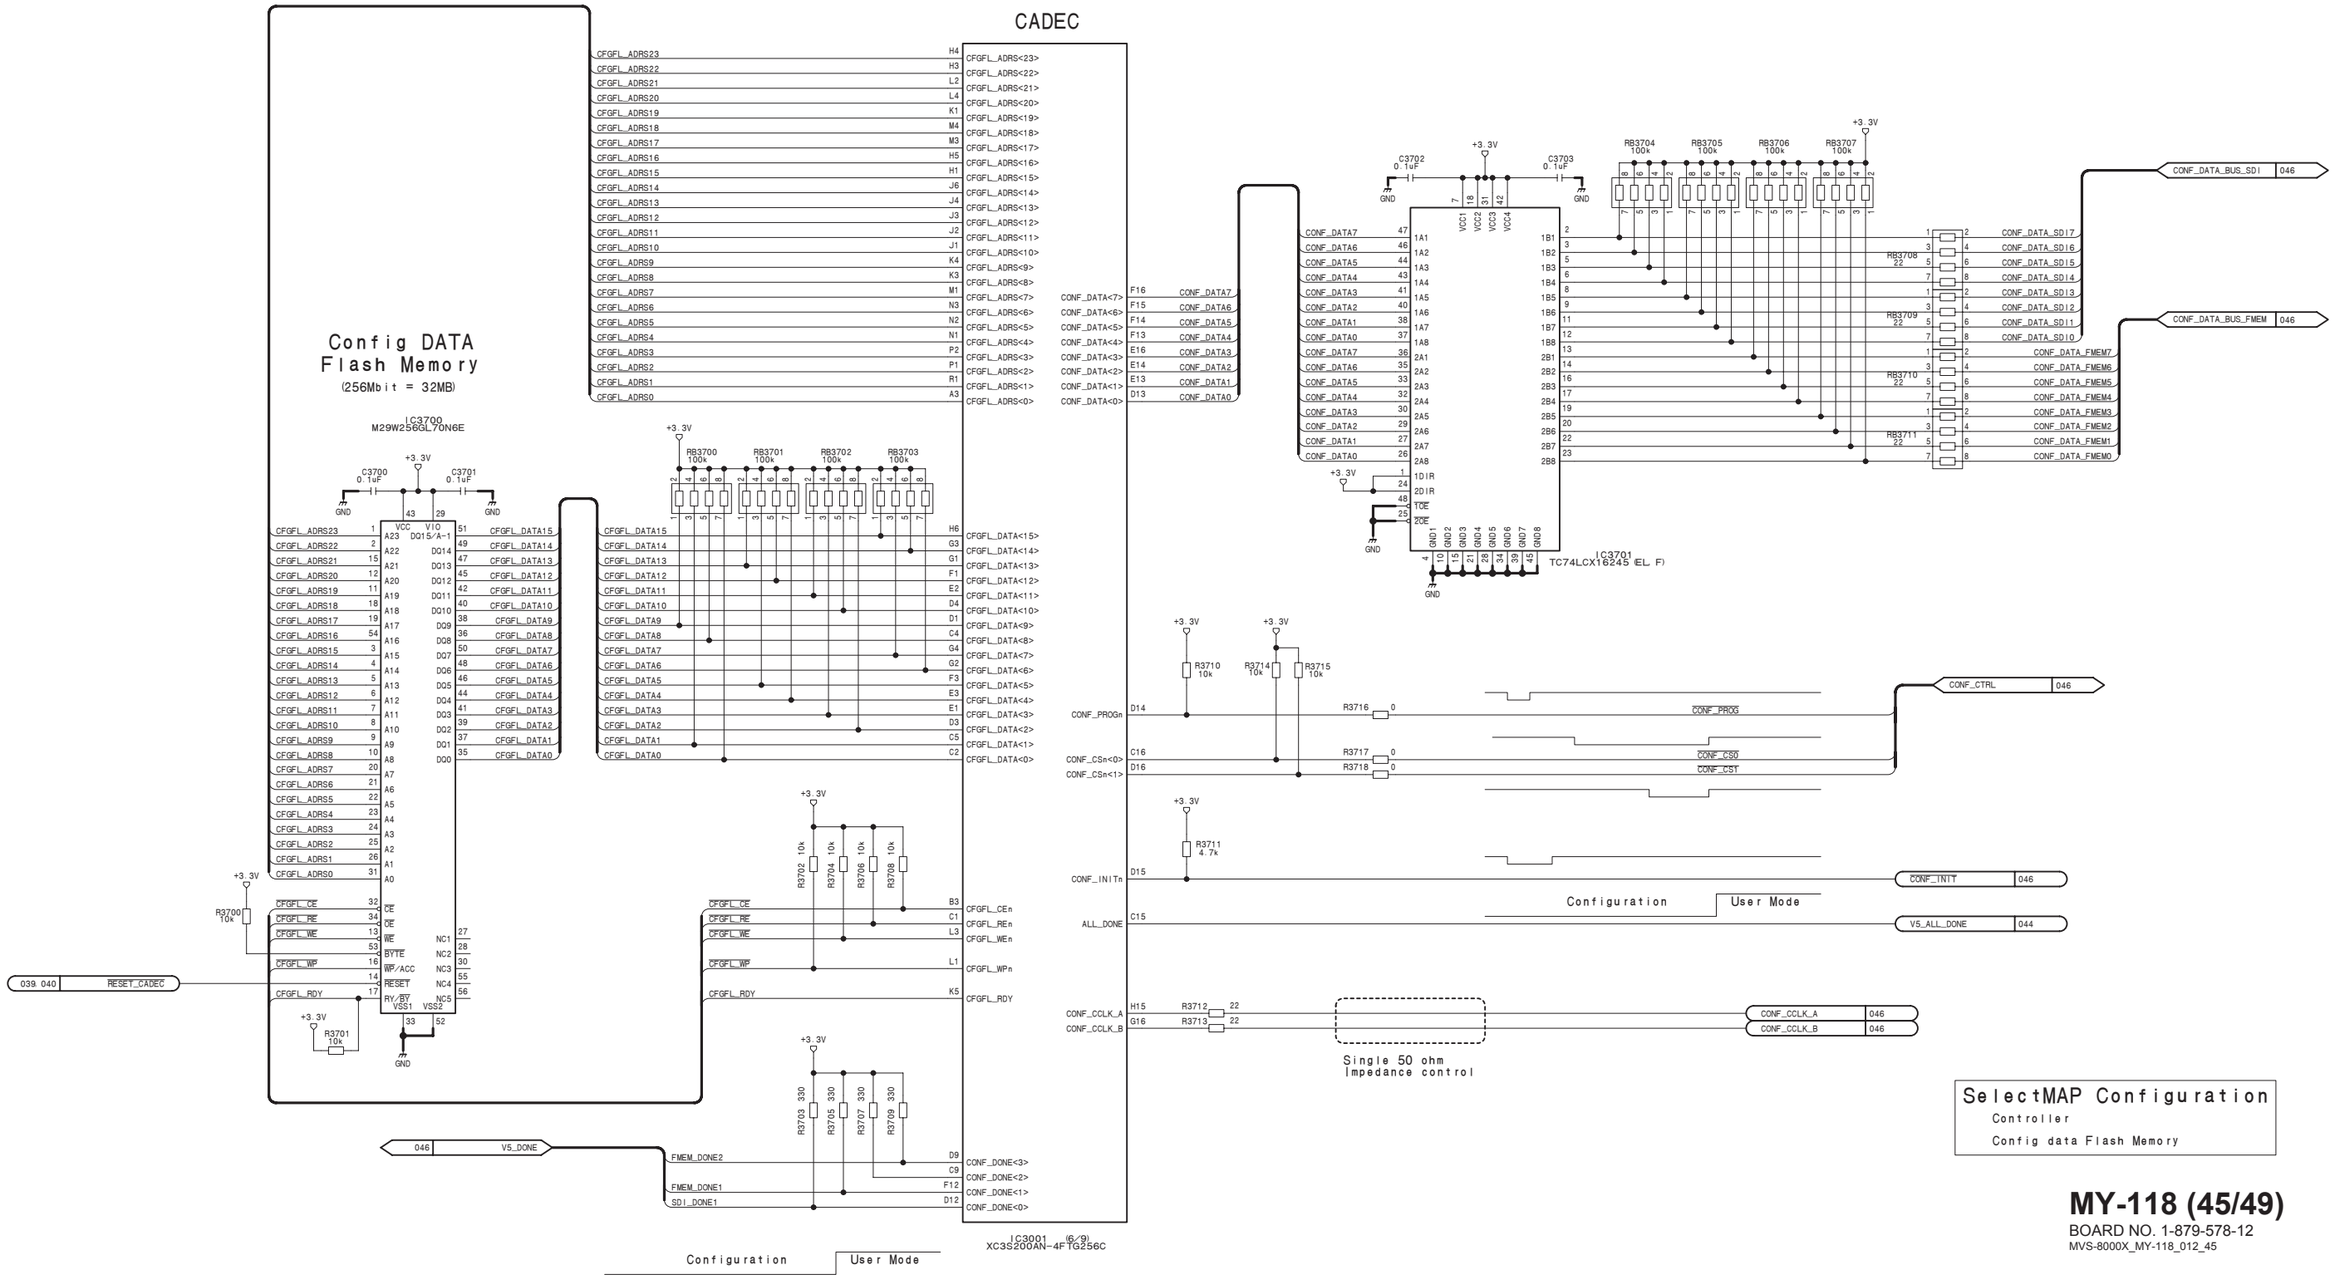

MY-118 (45/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_45

MY-118 (46/49)
SUFFIX: -12

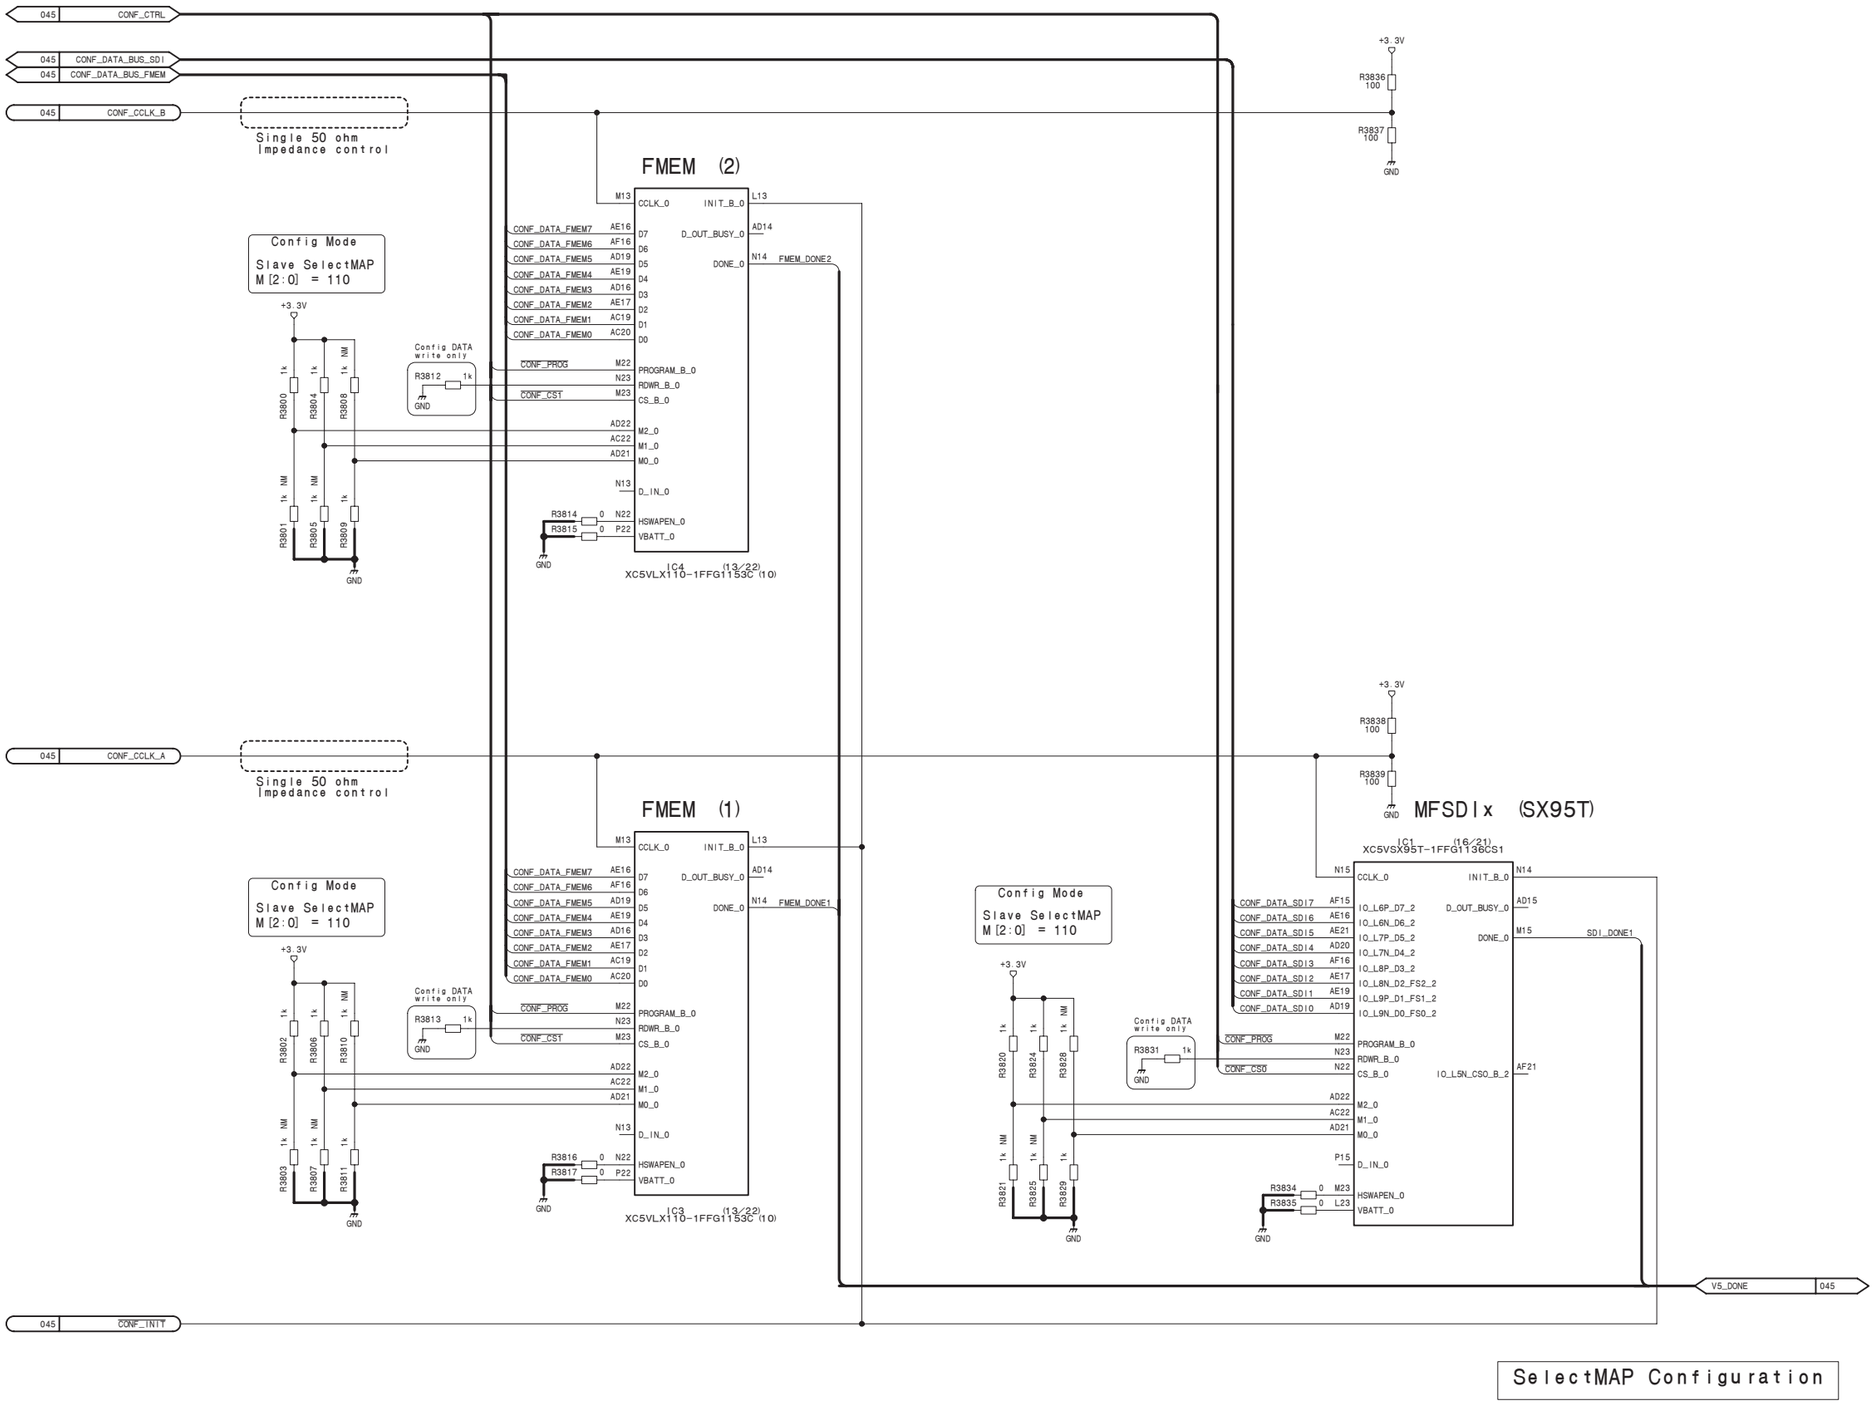

MY-118 (46/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_46

MY-118 (47/49)
SUFFIX: -12

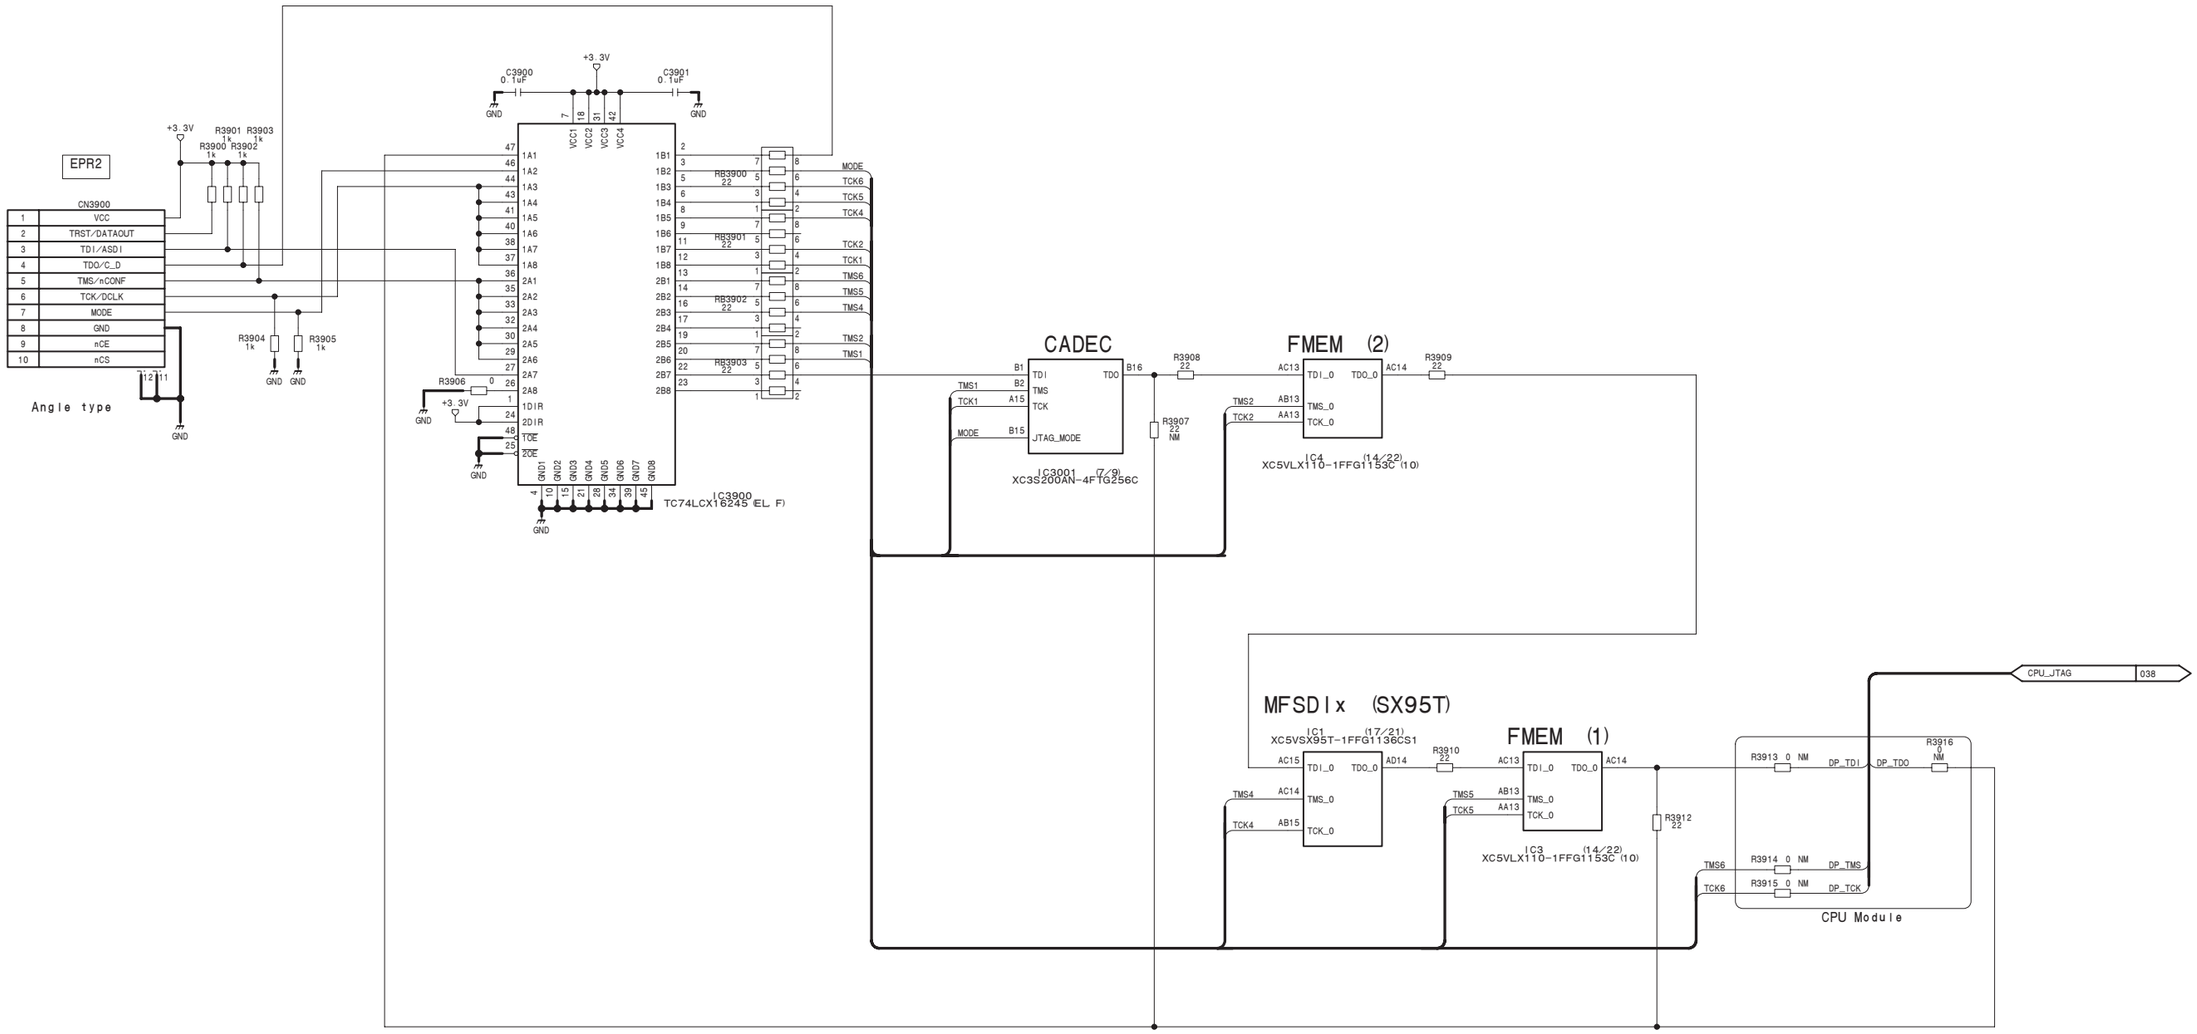

MY-118 (47/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_47

MY-118 (48/49)
SUFFIX: -12

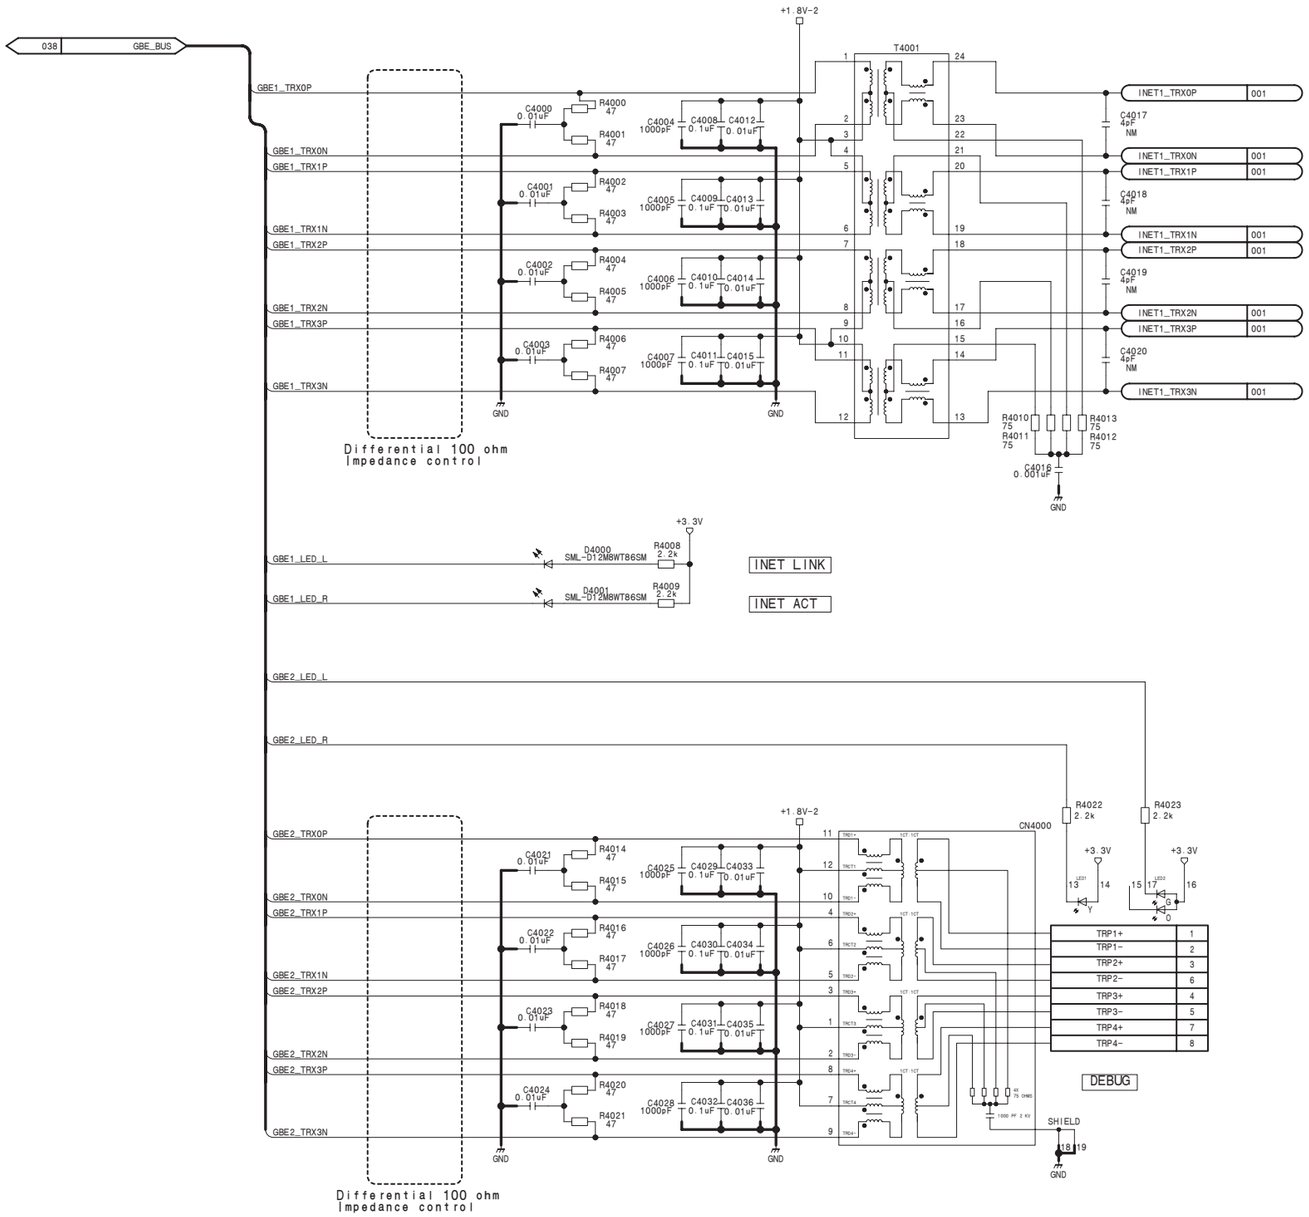

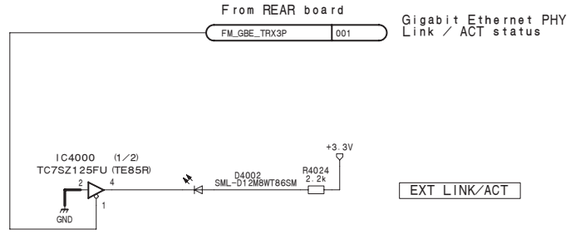



Internal Ethernet
Debug Ethernet
FM DATA LAN LINK/ACT LED

MY-118 (48/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_48

MY-118 (49/49)
SUFFIX: -12

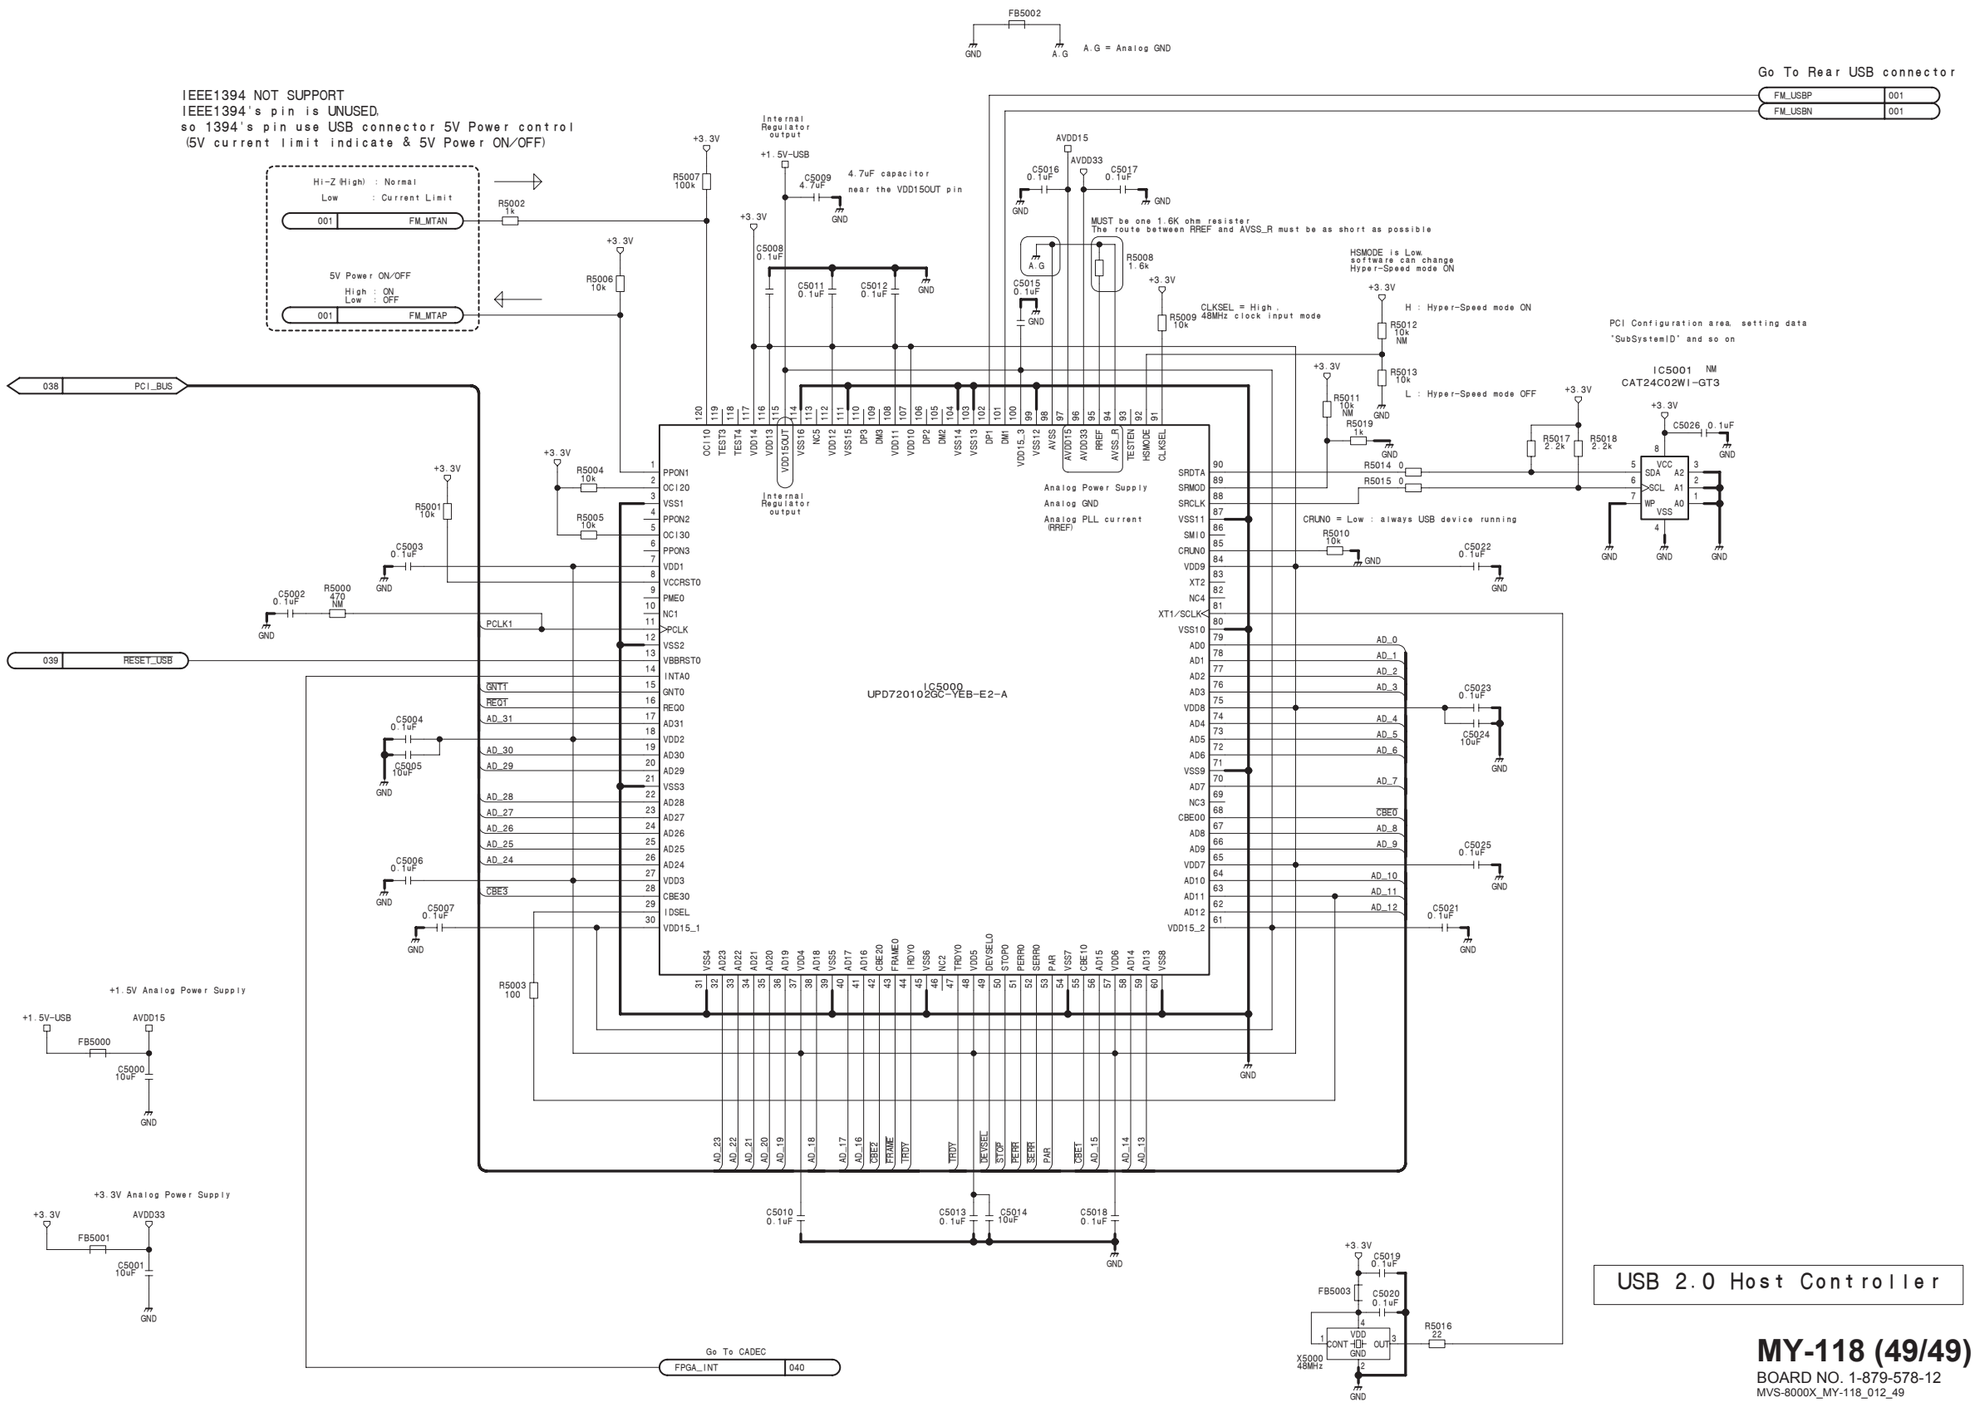

USB 2.0 Host Controller

MY-118 (49/49)
BOARD NO. 1-879-578-12
MVS-8000X_MY-118_012_49

Frame Wiring (1/2) MVS-8000X

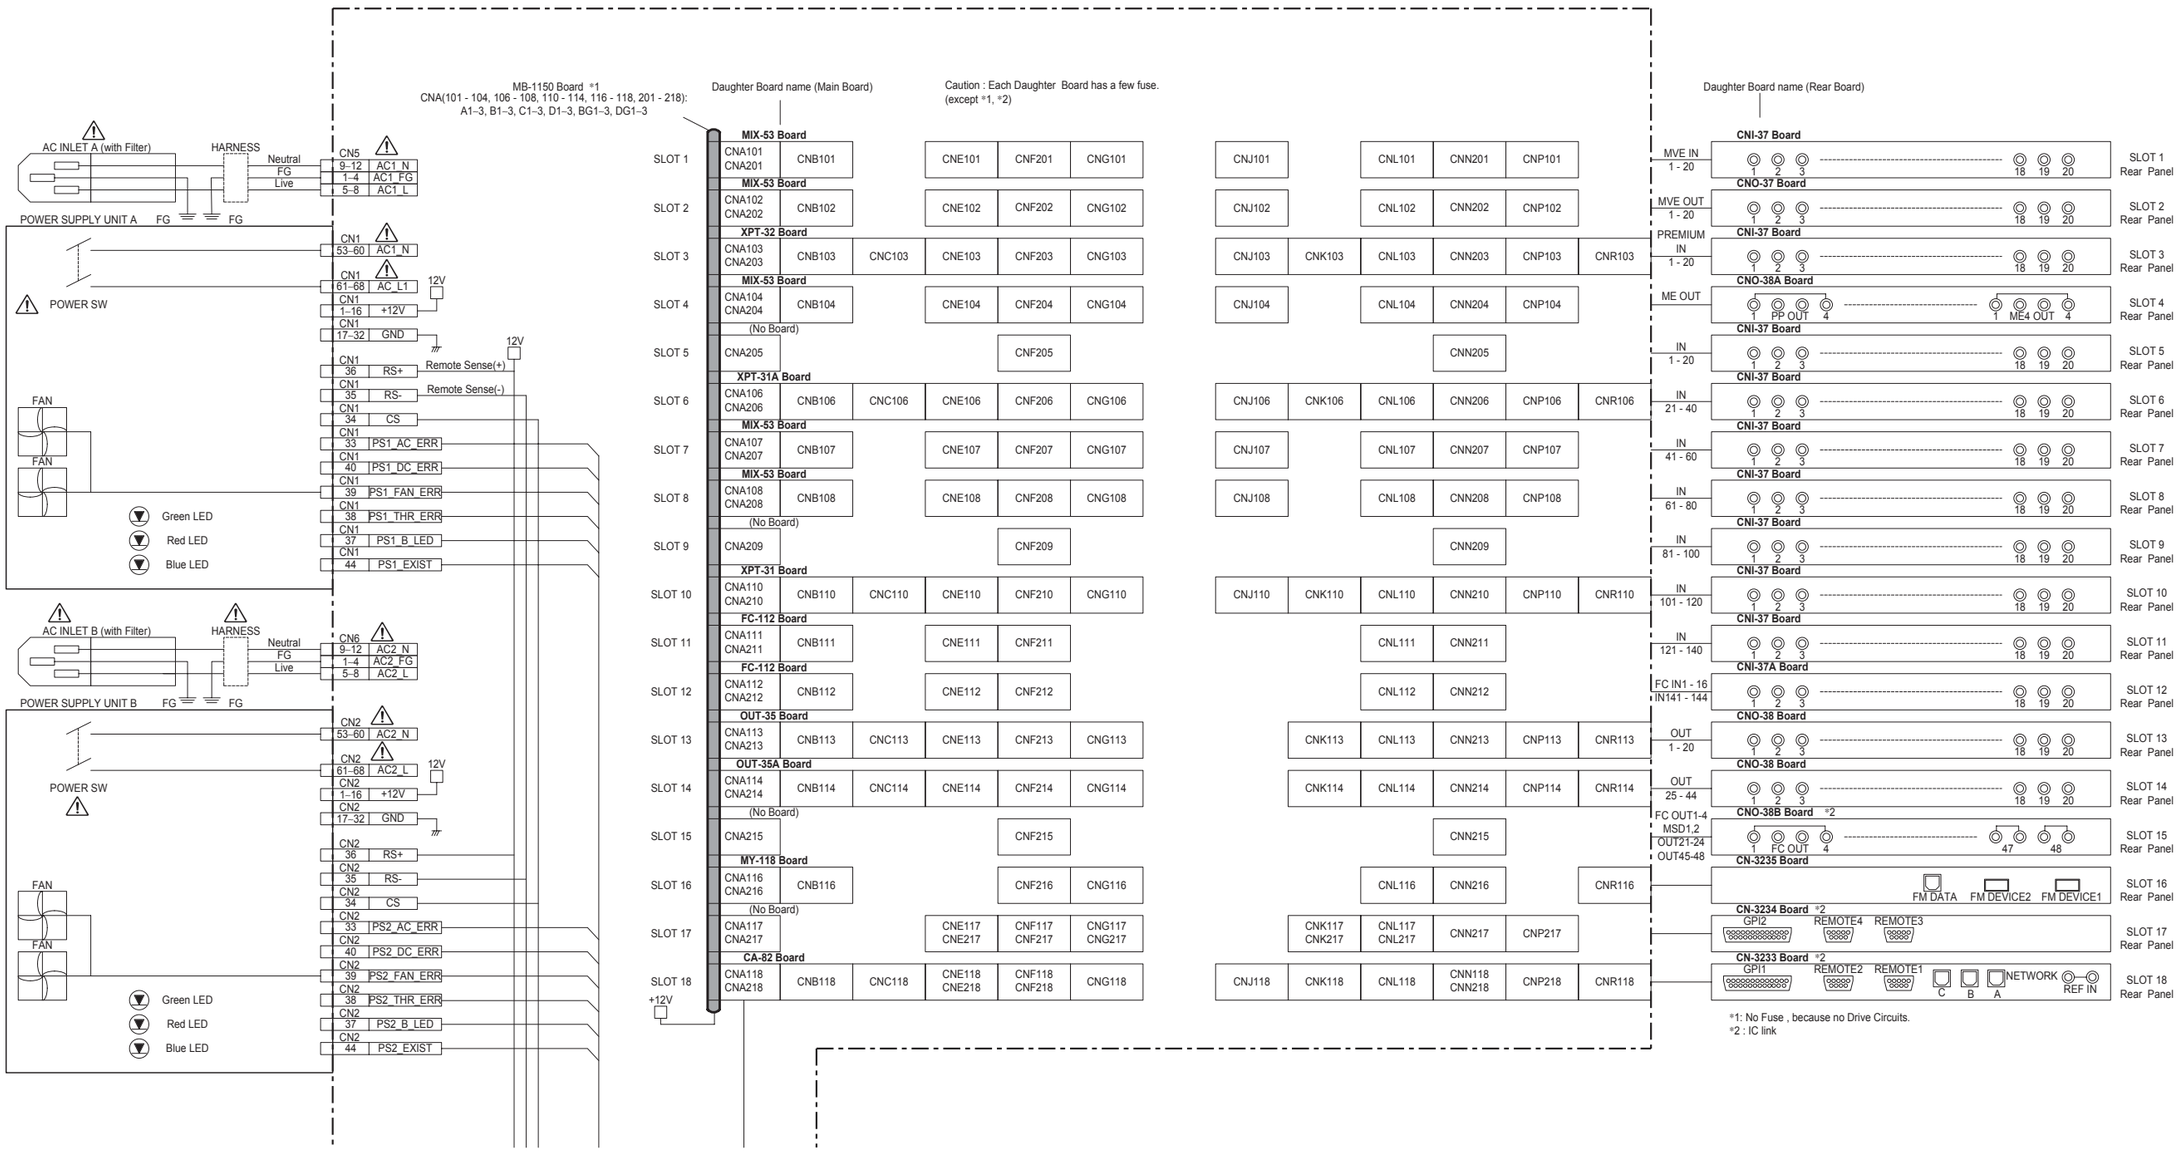

Frame Wiring (1/2) MVS-8000X

Frame Wiring (2/2)

MVS-8000X

Frame Wiring (2/2)
MVS-8000X

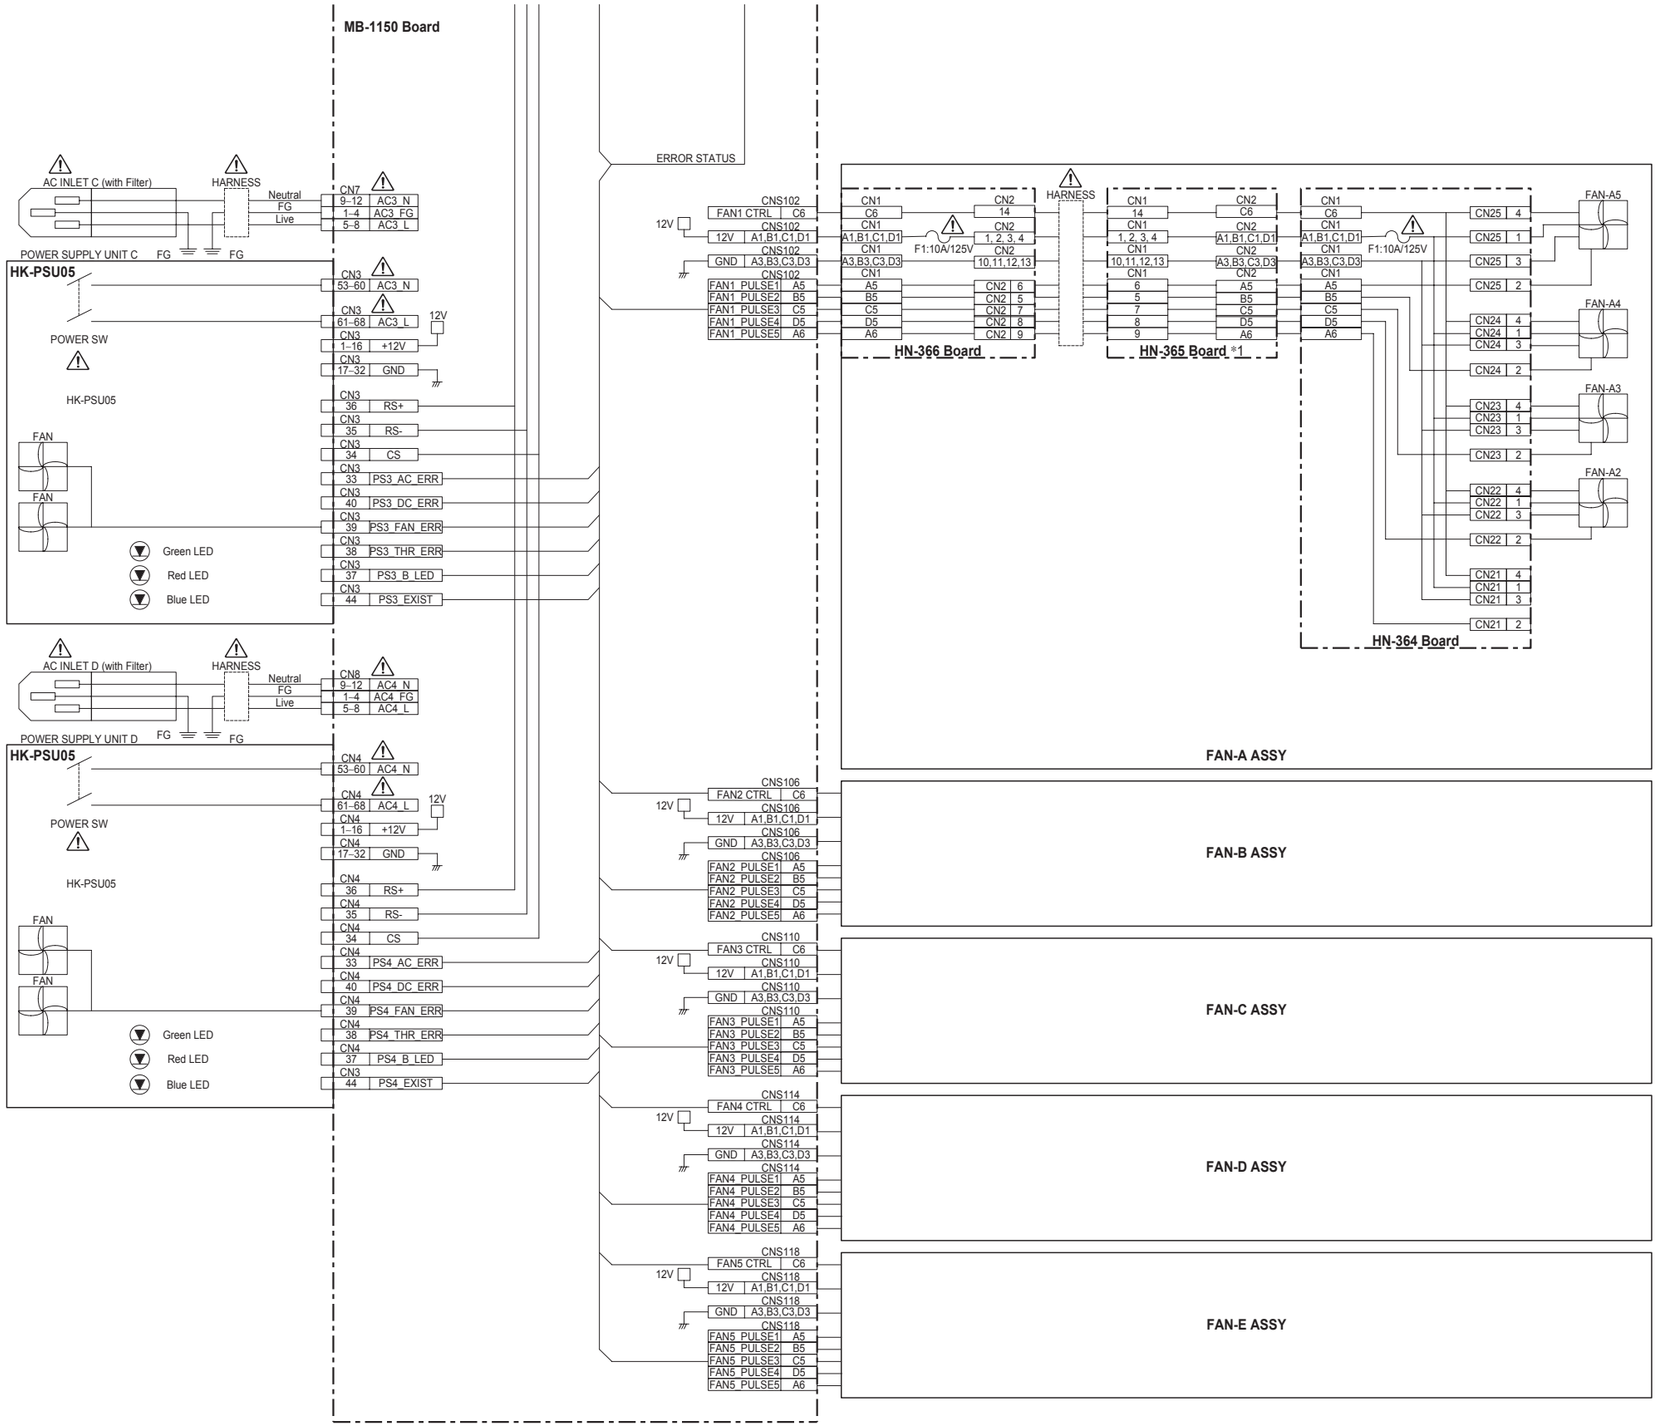

FAN Position

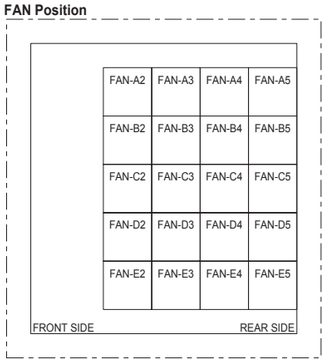

Frame Wiring (2/2)
MVS-8000X

Frame Wiring (1/2)
MVS-7000X

Frame Wiring (1/2)
MVS-7000X

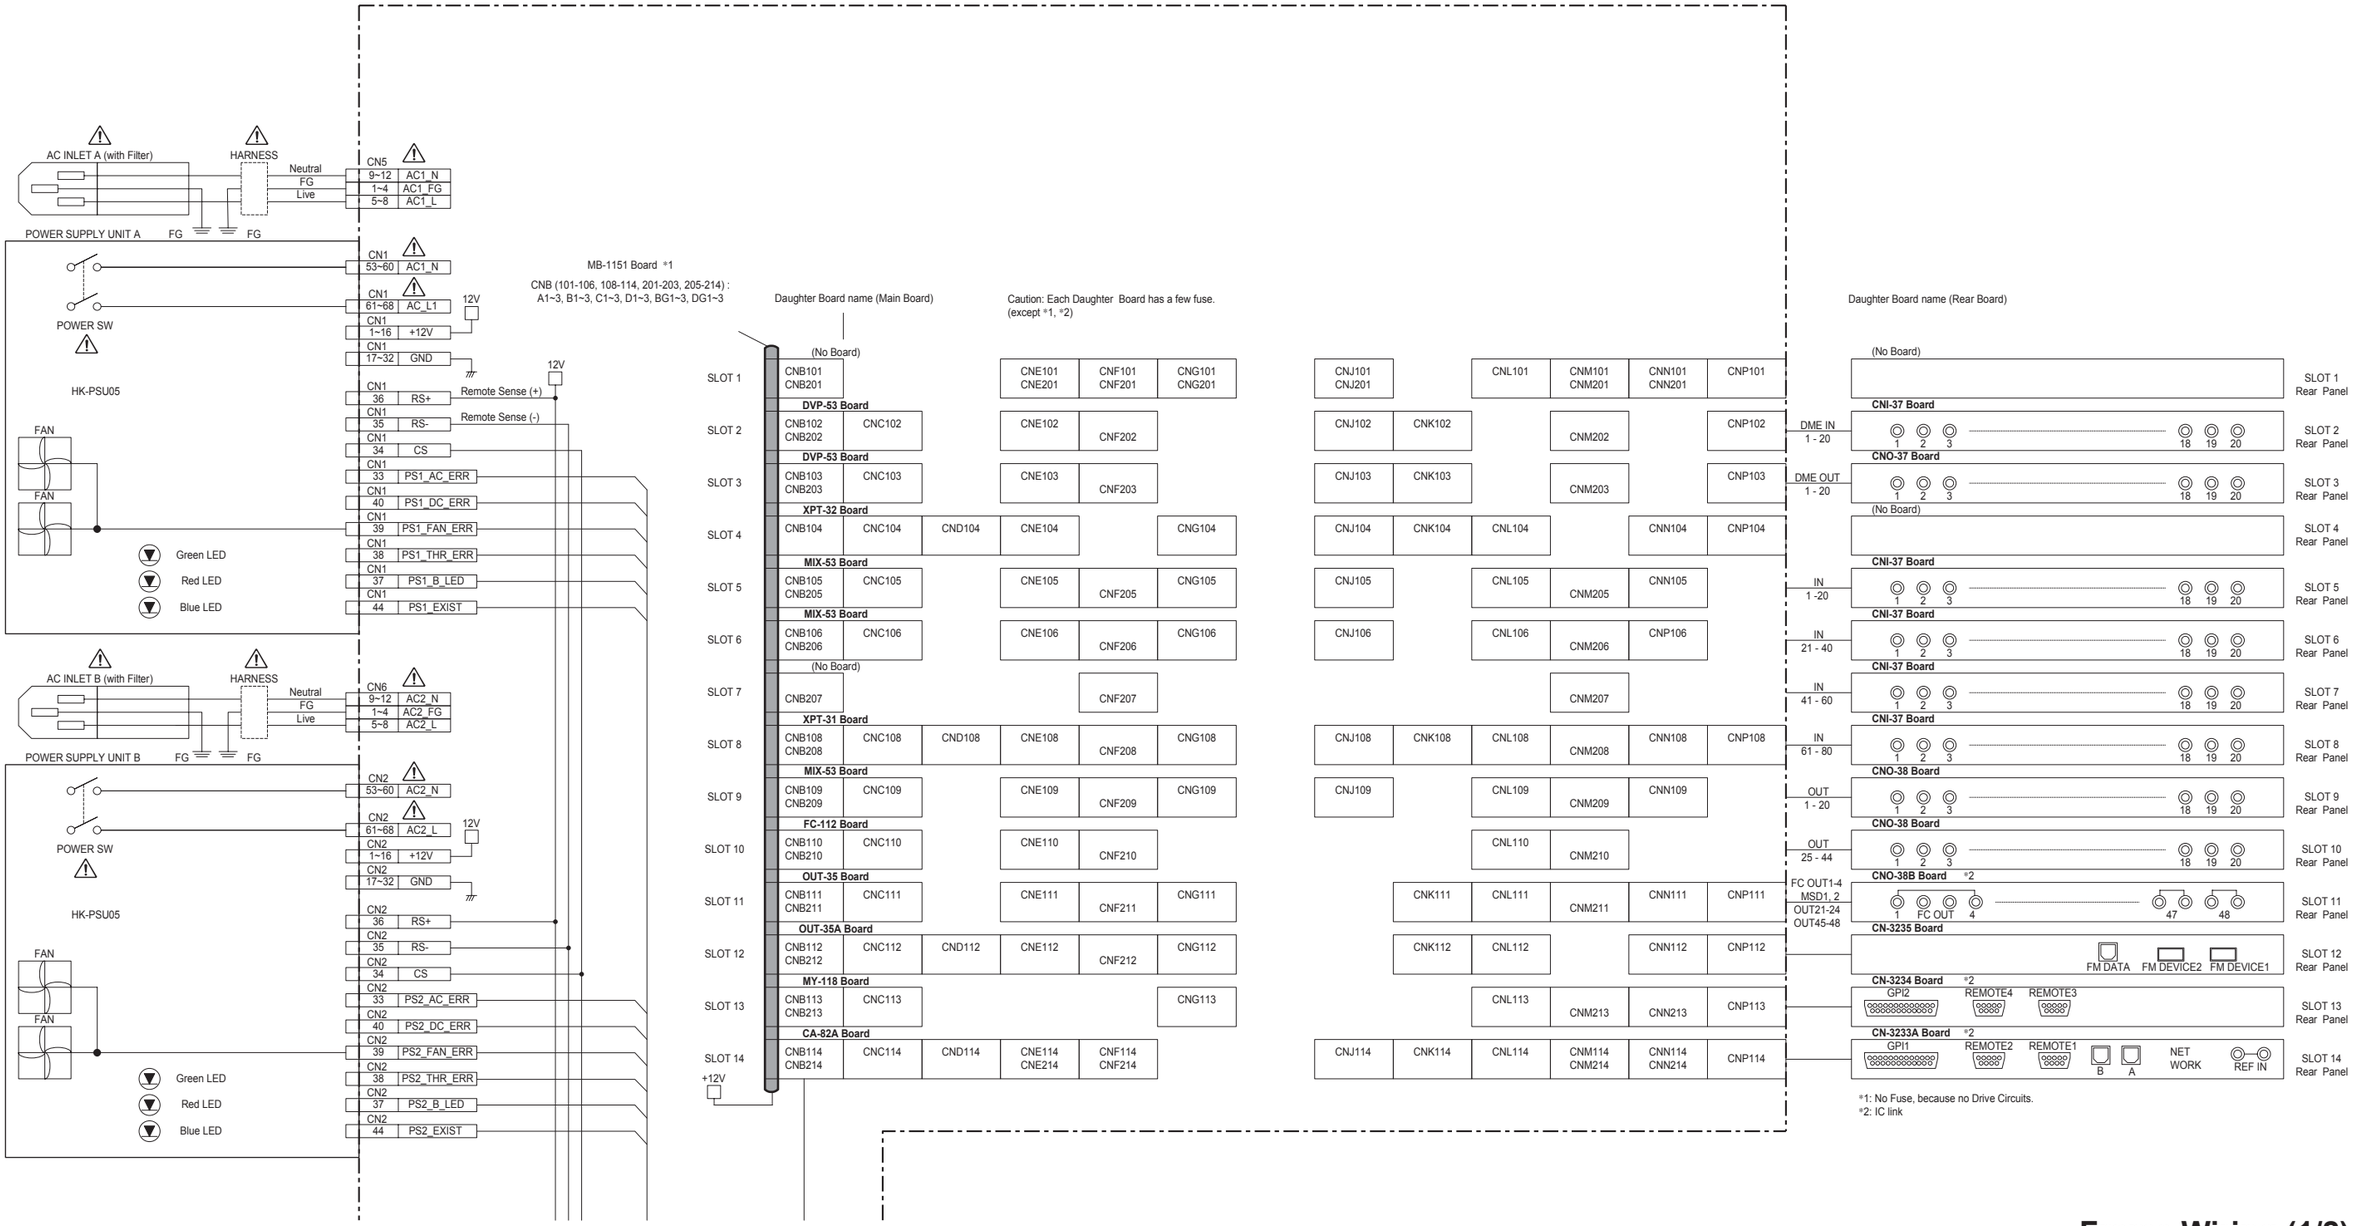

Frame Wiring (1/2)
MVS-7000X

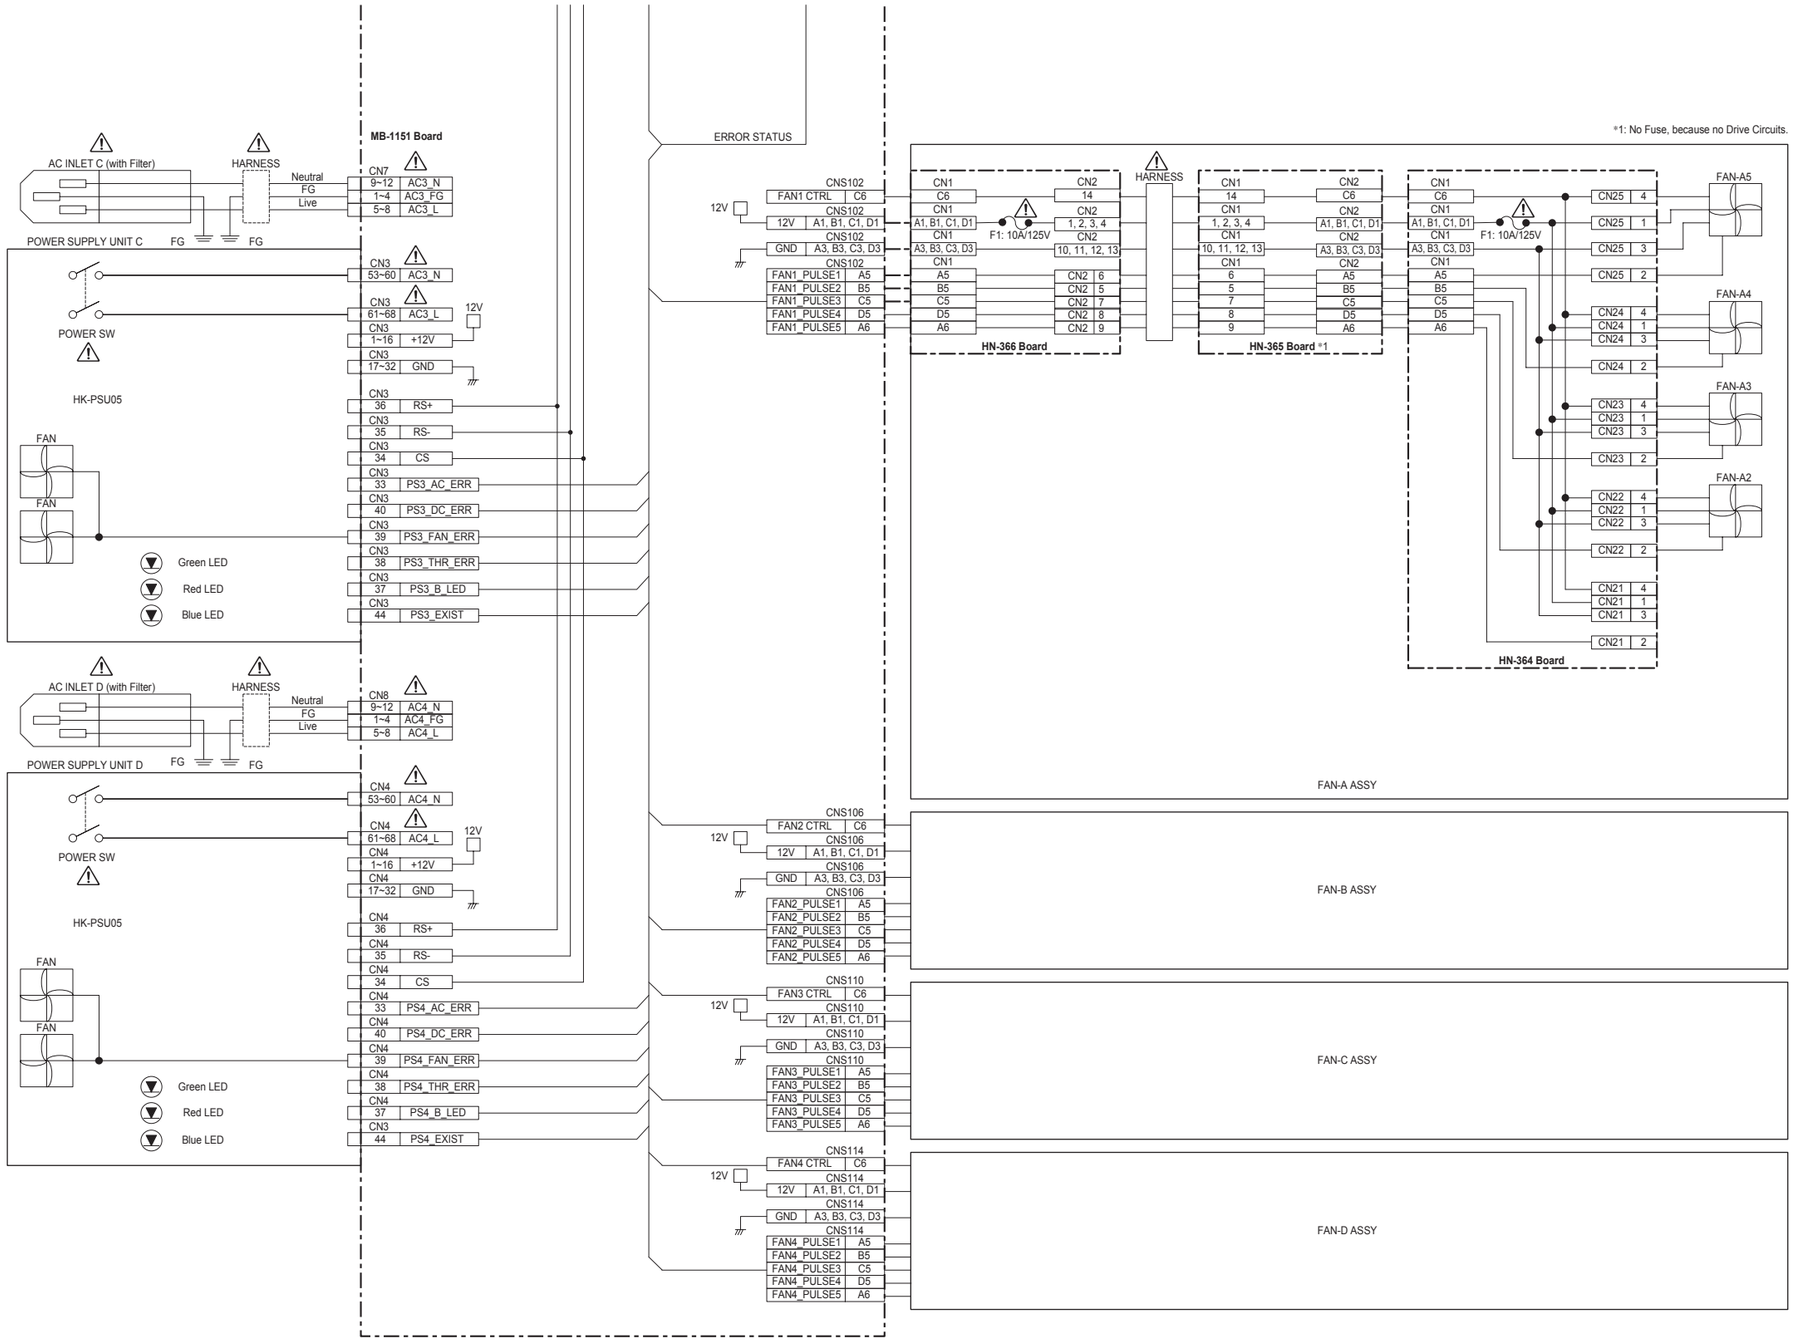

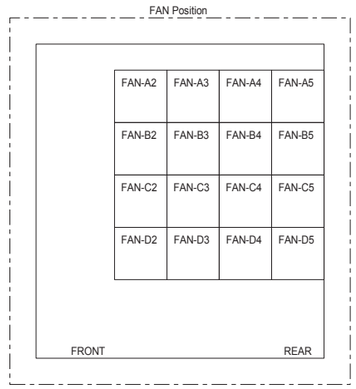

Frame Wiring (2/2)
MVS-7000X

Section 5
Board Layouts

Index

Board name		Page
CA-82	SUFFIX-13	5-2
CA-82/82A	SUFFIX-14	5-2 (a)
CN-3233/3233A		5-6
CN-3234		5-8
CN-3235		5-44
CNI-37/37A	SUFFIX-11	5-10
	SUFFIX-12	5-10 (a)
CNO-37	SUFFIX-11	5-12
	SUFFIX-12	5-12 (a)
CNO-38/38A/38B	SUFFIX-11	5-14
	SUFFIX-12	5-14 (a)
DVP-53		5-46
FC-112		5-52
HN-364	SUFFIX-11	5-17
	SUFFIX-12	5-17
HN-365		5-17
HN-366		5-17
MB-1150		5-18
MB-1151		5-20
MIX-53	SUFFIX-13	5-22
	SUFFIX-14	5-22 (a)
MY-118		5-58
OUT-35/35A		5-28
SG-272A		5-33
SIO-26A		5-35
XPT-31/31A	SUFFIX-13	5-36
	SUFFIX-14	5-36 (a)
XPT-32		5-40

5-1

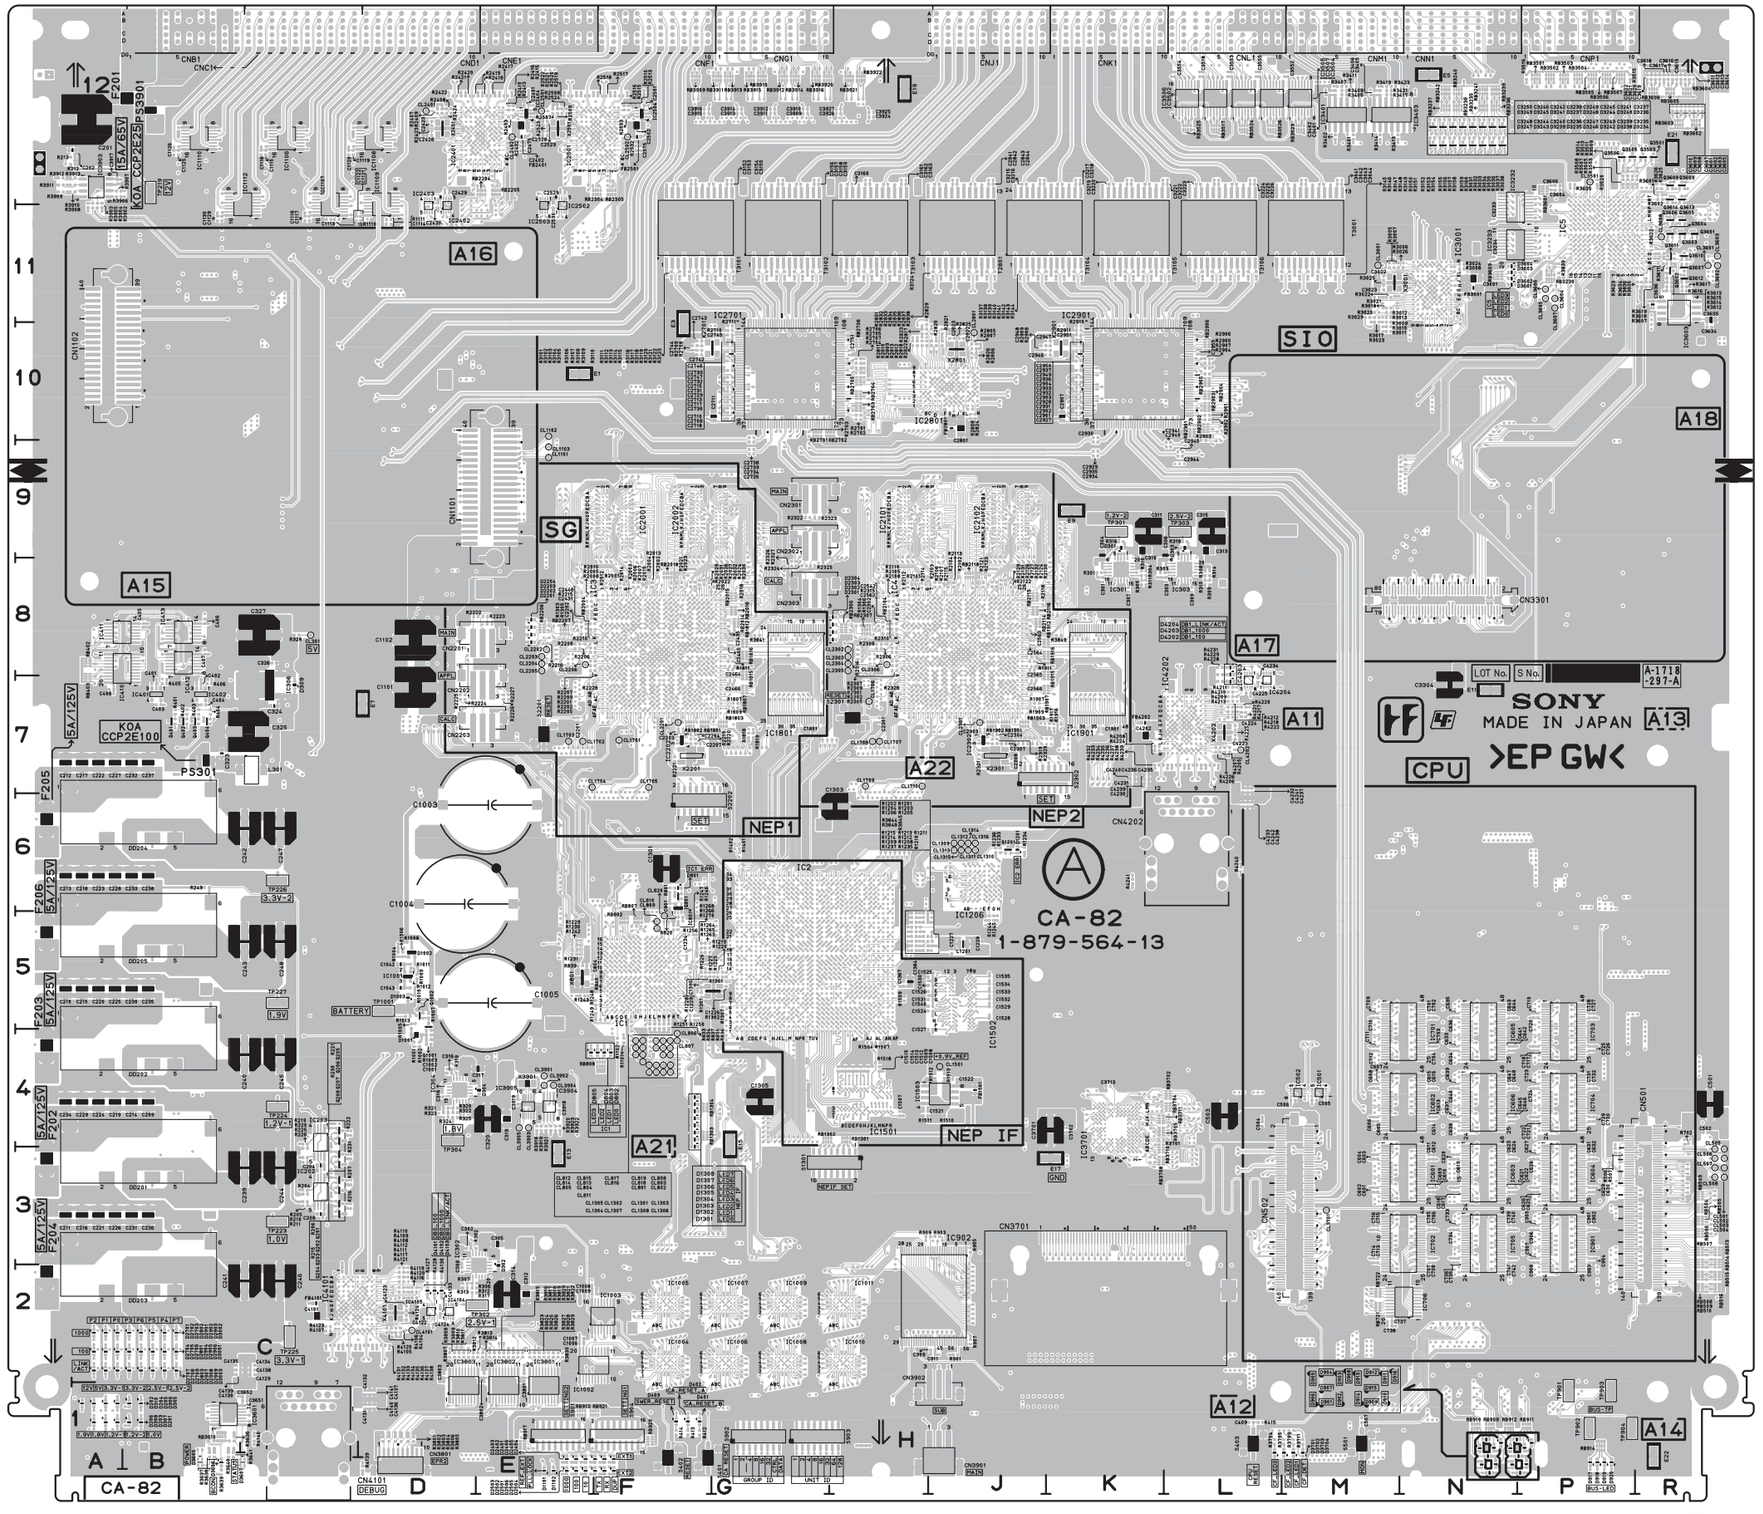

CA-82 -A SIDE-
SUFFIX: -13

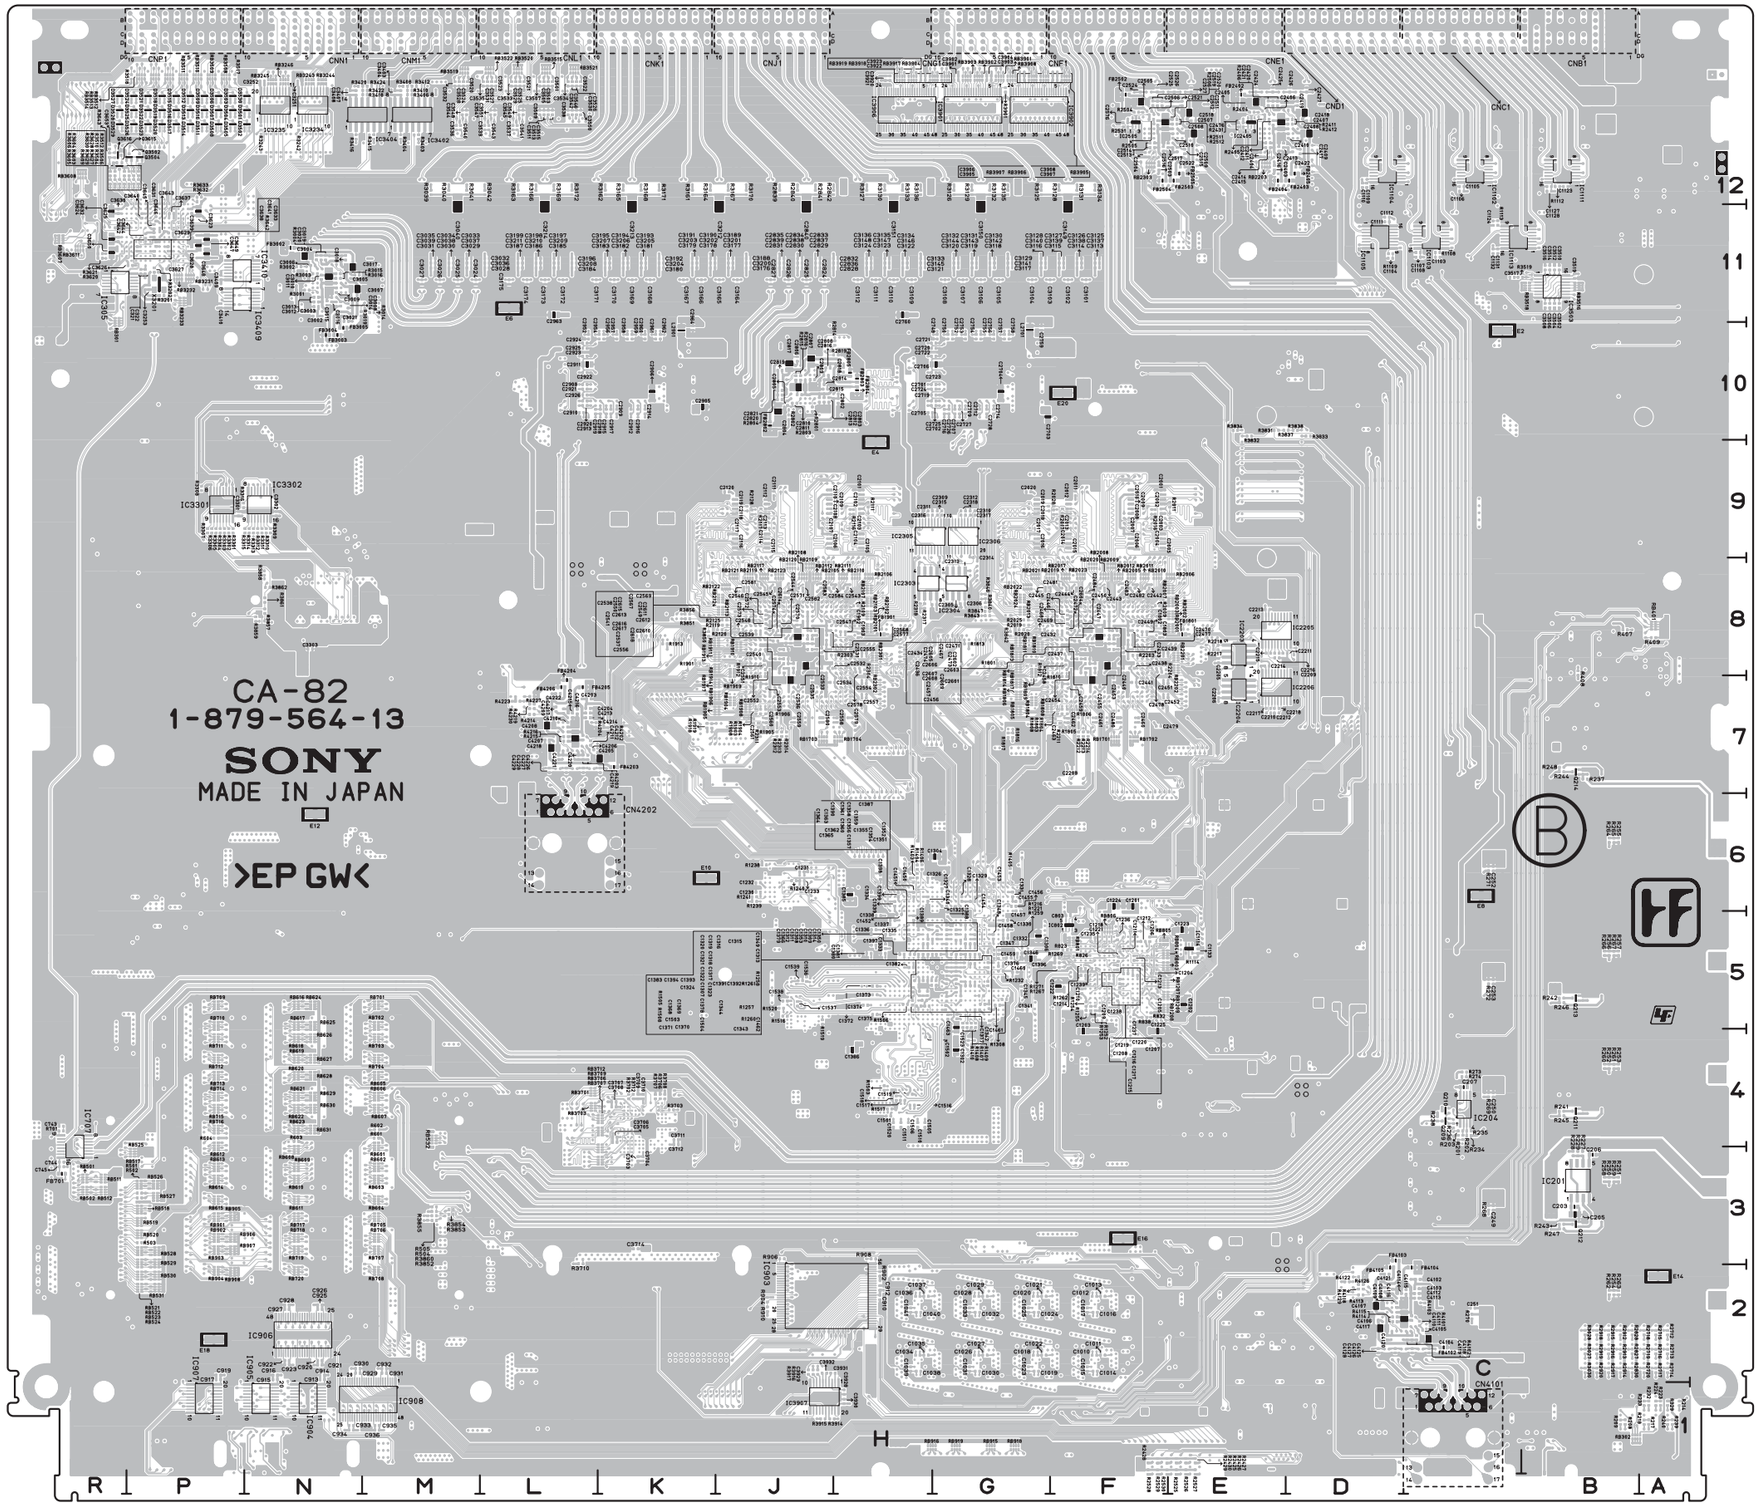
CA-82
1-879-564-13
SONY
MADE IN JAPAN
>EP GW<
CNP1
CNN1
CNM1
CNL1
CNK1
CNJ1
CNG1
CNF1
CNE1
CND1
CNC1
CNB1
IC3301
IC3302
IC2305
IC2306
IC2303
IC2304
IC2307
IC2308
IC2309
IC2310
IC2311
IC2312
IC2313
IC2314
IC2315
IC2316
IC2317
IC2318
IC2319
IC2320
IC2321
IC2322
IC2323
IC2324
IC2325
IC2326
IC2327
IC2328
IC2329
IC2330
IC2331
IC2332
IC2333
IC2334
IC2335
IC2336
IC2337
IC2338
IC2339
IC2340
IC2341
IC2342
IC2343
IC2344
IC2345
IC2346

CA-82 (1-879-564-13)
---
*:B SIDE

C201	A12	C608	M4	C915	*N2	C1208	*F5	C1372	*H5	C2016	*G9	C2443	*F8	C2562	H8	C2808	*J10	C3008	*N11	C3167	*K11	C3509	*L12
C202	A12	C609	N3	C916	*N2	C1209	*F5	C1373	*H5	C2017	*G9	C2444	*F8	C2563	J8	C2809	*J10	C3009	*N11	C3168	*K11	C3510	*B11
C203	*B3	C610	N3	C917	*P2	C1210	*F5	C1374	*H5	C2018	*G9	C2445	*G8	C2564	J8	C2810	*J10	C3010	*N11	C3169	*K11	C3511	*L12
C204	C3	C611	N3	C919	*P2	C1211	*F5	C1375	*H5	C2019	*G9	C2446	*F8	C2565	J8	C2811	*J10	C3011	*N11	C3170	*K11	C3512	*B11
C205	*B3	C612	N3	C920	*N2	C1212	*F5	C1376	*G5	C2020	*G9	C2447	*F8	C2566	J7	C2812	*J10	C3012	*N11	C3171	*L11	C3513	*L12
C206	*B3	C613	N4	C921	*N2	C1213	*F5	C1377	*G5	C2101	*H9	C2448	E8	C2567	*J8	C2813	*J10	C3013	*N11	C3172	*L11	C3514	*B11
C207	*C4	C614	N4	C922	*N2	C1214	*F5	C1378	*G5	C2102	*H9	C2449	*F8	C2568	*J8	C2814	*J10	C3014	*N11	C3173	*L11	C3515	*L12
C208	C3	C615	N4	C923	*N2	C1215	*F5	C1379	*H5	C2103	*H9	C2450	*F8	C2569	*J8	C2815	*J10	C3015	*N11	C3174	*L11	C3516	*B11
C209	B4	C616	N4	C925	*N2	C1216	*F5	C1380	*H5	C2104	*H9	C2451	*F7	C2570	*J8	C2816	*J10	C3016	*N11	C3175	*L11	C3517	*C11
C210	A5	C617	N3	C926	*N2	C1217	*F5	C1381	*H5	C2105	*H9	C2452	*F7	C2571	*J8	C2817	*J10	C3017	*N11	C3176	*J11	C3518	L12
C211	A3	C618	N3	C927	*N2	C1218	*F5	C1382	*H5	C2106	*J9	C2453	*F7	C2572	*J8	C2818	*H10	C3018	*N11	C3177	*J11	C3519	*B11
C212	A7	C619	N3	C928	*N2	C1219	*F5	C1383	*H5	C2107	*J9	C2454	*F8	C2573	*J8	C2819	*J10	C3019	*N11	C3178	*K11	C3520	*M12
C213	A6	C620	N3	C929	*N2	C1220	*F5	C1384	H5	C2108	*J9	C2455	*F7	C2574	*J8	C2820	*J10	C3020	*N11	C3179	*K11	C3521	*L12
C214	B4	C621	N3	C930	*N2	C1221	*F5	C1385	*H6	C2109	*J9	C2456	*F7	C2575	F12	C2821	*J10	C3021	*N11	C3180	*K11	C3522	*L12
C215	A5	C622	N3	C931	*M2	C1222	*F5	C1386	*H4	C2110	*J9	C2457	*F8	C2576	*F12	C2822	J10	C3022	M11	C3181	*K11	C3523	*L12
C216	A3	C623	N3	C932	*M2	C1223	*E5	C1387	*G5	C2111	*J9	C2458	*F8	C2577	*J8	C2823	J10	C3023	M11	C3182	*K11	C3524	*M12
C217	A7	C624	N3	C933	*N1	C1224	*F6	C1388	*G5	C2112	*J9	C2459	*F7	C2578	*H8	C2824	*J11	C3024	*M11	C3183	*K11	C3525	*L12
C218	A6	C625	P3	C934	*N1	C1225	*F4	C1389	*H5	C2113	*J9	C2460	*F7	C2579	*H7	C2825	*J11	C3025	*M11	C3184	*L11	C3526	*L12
C219	A4	C626	P3	C935	*M1	C1226	G5	C1390	*H5	C2114	*J9	C2461	*F7	C2580	*J7	C2826	*J11	C3026	*M11	C3185	*L11	C3527	*L12
C220	A5	C627	P3	C936	*M1	C1227	J5	C1391	*G5	C2115	*J9	C2462	*F7	C2581	*J8	C2827	*J11	C3027	*M11	C3186	*L11	C3528	*M12
C221	A3	C628	P3	C1001	D4	C1228	J5	C1392	*G5	C2116	*J9	C2463	*F7	C2582	*J8	C2828	*H11	C3028	*L11	C3187	*L11	C3529	*L12
C222	A7	C629	P3	C1002	D4	C1229	F5	C1393	*G5	C2117	*J9	C2464	G8	C2583	*J8	C2829	*J11	C3029	*M11	C3188	*J11	C3530	*L12
C223	A6	C630	P3	C1003	E6	C1230	*J6	C1394	*H5	C2118	*J9	C2465	G8	C2584	*J8	C2830	*J11	C3030	*M11	C3189	*J11	C3531	*L12
C224	A4	C631	P3	C1004	D6	C1231	*J6	C1395	F5	C2119	*J9	C2466	G7	C2601	*F8	C2831	*J11	C3031	*M11	C3190	*K11	C3532	*M12
C225	A5	C632	P3	C1005	E5	C1232	*J6	C1396	*G5	C2120	*J9	C2467	*F8	C2602	*F8	C2832	*H11	C3032	*L11	C3191	*K11	C3533	*L12
C226	A3	C633	N4	C1006	E2	C1233	*J6	C1397	*H5	C2201	E7	C2468	*F8	C2603	*F8	C2833	*J11	C3033	*M11	C3192	*K11	C3534	*L12
C227	A7	C634	N4	C1007	E2	C1234	F5	C1398	*H6	C2202	E8	C2469	*G8	C2604	*F8	C2834	*J11	C3034	*M11	C3193	*K11	C3535	*L12
C228	A6	C635	N5	C1008	F2	C1235	*F5	C1399	*H6	C2203	F7	C2470	*F8	C2605	*F8	C2835	*J11	C3035	*M11	C3194	*K11	C3536	*M12
C229	A4	C636	N5	C1009	F2	C1236	*F5	C1450	*H6	C2204	F7	C2471	*F8	C2606	*F8	C2836	*H11	C3036	*L11	C3195	*K11	C3537	*L12
C230	B5	C637	N4	C1010	*F2	C1237	*F5	C1451	*H6	C2205	*E8	C2472	*F8	C2607	*F8	C2837	*J11	C3037	*M11	C3196	*L11	C3538	*L12
C231	B3	C638	N4	C1011	*F2	C1238	*F5	C1452	*H5	C2206	*E7	C2473	*F8	C2608	*F8	C2838	*J11	C3038	*M11	C3197	*L11	C3539	*L12
C232	B7	C639	N4	C1012	*F2	C1239	*F5	C1453	*G6	C2207	F7	C2474	*F8	C2609	*F8	C2839	*J11	C3039	*M11	C3198	*L11	C3540	*M12
C233	B6	C640	N4	C1013	*F2	C1301	F6	C1454	*G6	C2208	*F7	C2475	E12	C2610	*J8	C2840	*J11	C3040	*M11	C3199	*L11	C3541	*L12
C234	A4	C641	N4	C1014	*F2	C1302	*G4	C1455	*G6	C2209	*E8	C2476	*E12	C2611	*J8	C2841	J12	C3041	M12	C3200	*J11	C3542	*L12
C235	B5	C642	N4	C1015	*F2	C1303	H6	C1456	*G6	C2210	*E7	C2477	*F8	C2612	*J8	C2842	J12	C3042	M12	C3201	*J11	C3543	*L12
C236	B3	C643	N5	C1016	*F2	C1304	*G6	C1457	*G5	C2211	*E8	C2478	*F8	C2613	*J8	C2843	J12	C3043	M12	C3202	*K11	C3544	*M12
C237	B7	C644	N5	C1017	*F2	C1305	G4	C1458	*G5	C2212	*E7	C2479	*F7	C2614	*J8	C2844	J12	C3044	M12	C3203	*K11	C3545	*L12
C238	B6	C645	N4	C1018	*G2	C1306	*G5	C1459	*G5	C2213	*E8	C2480	*F7	C2615	*J8	C2901	K10	C3101	*F11	C3204	*K11	C3546	*L12
C239	C3	C646	N4	C1019	*G2	C1307	*G5	C1460	*G5	C2214	*E8	C2481	*F8	C2616	*J8	C2902	K10	C3102	*F11	C3205	*K11	C3547	*L12
C240	C4	C647	N4	C1020	*G2	C1308	*G5	C1461	*G5	C2215	*E8	C2482	*F8	C2617	*J8	C2903	K10	C3103	*F11	C3206	*K11	C3548	*M12
C241	C2	C648	N4	C1021	*G2	C1309	*G5	C1462	*G5	C2216	*E8	C2483	*F8	C2618	*J8	C2904	K10	C3104	*G11	C3207	*K11	C3549	*L12
C242	C6	C701	N5	C1022	*G2	C1310	*G5	C1463	*G5	C2217	*E7	C2484	*F8	C2701	*G10	C2905	*K10	C3105	*G11	C3208	*L11	C3550	*L12
C243	C5	C702	N5	C1023	*G2	C1311	*H5	C1501	*H4	C2218	*E7	C2501	F12	C2702	*G10	C2906	*K10	C3106	*G11	C3209	*L11	C3551	*L12
C244	C3	C703	N4	C1024	*G2	C1312	*H5	C1502	*H4	C2301	H7	C2502	F12	C2703	*G10	C2907	K10	C3107	*G11	C3210	*L11	C3552	M12
C245	C4	C704	N4	C1025	*G2	C1313	*G5	C1503	*H5	C2302	H8	C2503	*F12	C2704	*G10	C2908	*L10	C3108	*G11	C3211	*L11	C3553	L12
C246	C2	C705	N3	C1026	*G2	C1314	*G5	C1504	*G5	C2303	J7	C2504	*F12	C2705	*H10	C2909	*K10	C3109	*H11	C3212	*J11	C3554	L12
C247	C6	C706	N3	C1027	*G2	C1315	*G5	C1505	*H4	C2304	J7	C2505	*F12	C2706	*G10	C2910	*L10	C3110	*H11	C3213	*K11	C3555	L12
C248	C5	C707	N3	C1028	*G2	C1316	*G5	C1506	*H4	C2305	*G8	C2506	*F12	C2707	*G10	C2911	*L10	C3111	*H11	C3214	*L11	C3601	R12
C249	*C3	C708	N3	C1029	*G2	C1317	*G5	C1507	H4	C2306	*G8	C2507	*E12	C2708	G10	C2912	*K10	C3112	*H11	C3215	J12	C3602	R12
C250	*C4	C709	M5	C1030	*G2	C1318	*G5	C1508	H4	C2307	J7	C2508	*E12	C2709	*G10	C2913	*L10	C3113	*F11	C3216	J12	C3603	R12
C251	*C2	C710	M5	C1031	*G2	C1319	*G5	C1509	H4	C2308	J7	C2509	*E12	C2710	G10	C2914	*K10	C3114	*F11	C3217	K12	C3604	P12
C252	*C6	C711	M4	C1032	*G2	C1320	*G5	C1510	*H4	C2309	*G9	C2510	*E12	C2711	G10	C2915	*K10	C3115	*F11	C3218	K12	C3605	R12
C253	*C5	C712	M4	C1033	*G2	C1321	*G5	C1511	*H4	C2310	*G9	C2511	*F12	C2712	*G10	C2916	*K10	C3116	*G11	C3219	K12	C3606	P12
C301	K8	C713	M3	C1034	*H2	C1322	*G5	C1512	H4	C2311	*H9	C2512	*F12	C2713	G10	C2917	*K10	C3117	*G11	C3220	K12	C3607	R12
C302	D3	C714	M3	C1035	*H2	C1323	*G5	C1513	H4	C2312	*G9	C2513	*F12	C2714	*G10	C2918	*K10	C3118	*G11	C3221	K12	C3608	R12
C303	L8	C715	M3	C1036	*H2	C1324	*G5	C1514	H4	C2313	*G8	C2514	*F12	C2715	G10	C2919	*L10	C3119	*G11	C3222	L12	C3609	R12
C304	K9	C716	M3	C1037	*H2	C1325	*G6	C1515	H4	C2314	*G8	C2515	*E12	C2716	*G10	C2920	*L10	C3120	*G11	C3223	L12	C3610	R12
C305	E3	C717	P4	C1038	*H2	C1326	*H6	C1516	*H4	C2315	*G9	C2516	*F12	C2717	G10	C2921	*L10	C3121	*H11	C3224	L12	C3611	R12
C306	L9	C718	P4	C1039	*H2	C1327	*G6	C1517	*H4	C2316	*H9	C2517	*E12	C2718	G10	C2922	*L10	C3122	*H11	C3225	L12	C3612	R12
C307	K8	C719	P5	C1040	*H2	C1328	*G6	C1518	*H4	C2317	*G9	C2518	*E12	C2719	*G10	C2923	*L10	C3123	*H11	C3226	L12	C3613	R12
C308	D2	C720	P5	C1041	*H2	C1329	*G6	C1519	*H4	C2318	*G9	C2519	*F12	C2720	*G10	C2924	*L10	C3124	*H11	C3233	N11	C3614	R12
C309	L8	C721	P4	C1042	D5	C1330	*G5	C1520	*H4	C2401	E12	C2520	*F12	C2721	G10	C2925	*L10	C3125	*F11	C3234	N11	C3615	R12
C310	K9	C722	P4	C1043	D5	C1331	*G6	C1521	H4	C2402	E12	C2521	*E12	C2722	*G10	C2926	*L10	C3126	*F11	C3235	N12	C3616	R12
C311	K9	C723	P4	C1101	D7	C1332	*G5	C1522	J4	C2403	*E12	C2522	*E12	C2723	G10	C2927	K10	C3127	*F11	C3236	N12	C3617	R12
C312	E2	C724	P4	C1102	D8	C1333	*H5	C1523	*G5	C2404	*E12	C2523	E12	C2724	*G10	C2928	K10	C3128	*G11	C3237	N12	C3618	R12
C313	L9	C725	P4	C1103	*C11	C1334	*H6	C1524	J5	C2405	*E12	C2524	*F12	C2725	G10	C2929	K9	C3129	*G11	C3238	N12	C3619	R12
C314	E2	C726	P4	C1104	*D11	C1335	*H5	C1525	J5	C2406	*E12	C2525	*F12	C2726	*G10	C2930	K10	C3130	*G11	C3239	N12	C3620	R12
C315	L9	C727	P5	C1105	*C12	C1336	*H5	C1526	J5	C2407	*D12	C2526	*E12	C2727	*G10	C2931	K10	C3131	*G11	C3240	N12	C3621	R12
C316	D4	C728	P5	C1106	*C12	C1337	*H5	C1527	J4	C2408	*D12	C2527	*E12	C2728	*G10	C2932	K10	C3132	*G11	C3241	N12	C3622	R12
C317	E4	C729	P4	C1107	*C11	C1338	*H5	C1528	J5	C2409	*D12	C2528	E12	C2729	G10	C2933	K10	C3133	*H11	C3242	N12	C3623	*P11
C318	D4	C730	P4	C1108	*C11	C1339	*H6	C1529	J5	C2410	*D12	C2529	E12	C2730	G10	C2934	K9	C3134	*H11	C3243	N12	C3624	*R11
C319	E4	C731	P4	C1109	*D12	C1340	*H6	C1530	J5	C2411	*E12	C2530	E11	C2731	G10	C2935	K9	C3135	*H11	C3244	N12	C3625	*R11
C320	E4	C732	P4	C1110	*D12	C1341	*G5	C1531	J5	C2412	*E12	C2531	*J8	C2732	G10	C2936	K10	C3136	*H11	C3245	N12	C3626	*P11
C321	*P11	C733	N3	C1111	*D11	C1342	*G5	C1532	J5	C2413	*E12	C2532	*J8	C2733	G10	C2937	K10	C3137	*F11	C3246	N12	C3627	*P11
C322	*P11	C734	N3	C1112	*D11	C1343	*G5	C1533	J5	C2414	*E12	C2533	*J8	C2734	G9	C2940	L9	C3138	*F11	C3247	N12	C3628	*P11
C323	B7	C735	N3	C1113	C11	C1344	*G5	C1534	J5	C2415	*E12	C2534	*J7	C2735	G9	C2941	L9	C3139	*F11	C3248	N12	C3629	*P11
C324	C7	C736	N3	C1114	D11	C1345	*G5	C1535	J5	C2416	*E12	C2535	*J7	C2738	G10	C2944	L9	C3140	*G11	C3249	N12	C3630	*R11
C325	C7	C737	M2	C1115	C12	C1346	*G5	C1536	*J5	C2417	*D12	C2536	*J7	C2739	G9	C2945	L9	C3141	*G11	C3250	N12	C3631	*P12
C326	C8	C738	M2	C1116	C12	C1347	*G5	C1537	*J5	C2418	*D12	C2537	*J8	C2742	F10	C2946	K10	C3142	*G11	C3251	*N12	C3632	*R11
C327	C8	C739	N3	C1117	C11	C1348	*G5	C1538	*J5	C2419	*D12	C2538	*J8	C2743	F10	C2947	K10	C3143	*G11	C3252	*N12	C3633	*P11
C401	B7	C740	N3	C1118	C11	C1349	*G5	C1539	*J5	C2420	*E12	C2539	*J8	C2744	F10	C2948	J10	C3144	*G11	C3253	*P11	C3634	R10
C402	B7	C741	N3	C1119	C12	C1350	*G5	C1540	J5	C2421	*E12	C2540	*J8	C2745	G10	C2949	K10	C3145	*H11	C3301	*P9	C3635	R11
C403	B7	C742	N3	C1120	C12	C1351	*G5	C1801	G7	C2422	*D12	C2541	*J8	C2746	G10	C2950	K10	C3146	*H11	C3302	*N9	C3636	R11
C404	B7	C743	*R4	C1121	D11	C1352	*G5	C1802	*F8	C2423	D12	C2542	H8	C2747	G10	C2951	K10	C3147	*H11	C3303	*N8	C3637	*P11
C405	B8	C744	*R3	C1122	C11	C1353	*G5	C1803	*F8	C2424	*E12	C2543	*H8	C2748	*G10	C2952	*L10	C3148	*H11	C3304	N7	C3638	*P11
C406	B8	C745	*R3	C1123	*B12	C1354	*G5	C1901	K7	C2425	*E12	C2544	*J8	C2750	*G10	C2954	*K10	C3149	*F11	C3401	M12	C3639	*P11
C407	B8	C801	F6	C1124	*C11	C1355	*G5	C1902	*H8	C2426	*D12	C2545	*J8	C2751	H10	C2955	L10	C3150	*G11	C3402	M12	C3640	*P11
C408	A7	C803	*F5	C1125	B12	C1356	*G5	C1903	*H8	C2427	*D12	C2546	*J8	C2752	*G10	C2956	*K10	C3151	*H11	C3403	*M12	C3641	*P11
C409	L1	C804	E5	C1126	B12	C1357	*G5	C2001	*F9	C2428	D12	C2547	*J8	C2753	*G10	C2957	*K10	C3152	F12	C3404	*M12	C3642	*P11
C501	R4	C901	P3	C1127	*B12	C1358	*G5	C2002	*F9	C2429	D12	C2548	*J8	C2754	*G10	C2958	*K10	C3153	F12	C3405	M12	C3643	*P11
C502	R4	C902	P3	C1128	*B12	C1359	*G5	C2003	*F9	C2430	D11	C2549	*J8	C2755	*G10	C2959	*K10	C3154	F12	C3406	M12	C3644	*P11
C503	L4	C903	P3	C1129	B11	C1360	*G5	C2004	*F9	C2431	E8	C2550	*J8	C2756	*G10	C2960	*K10	C3155	G12	C3407	*N12	C3645	*P11
C504	L4	C904	P3	C1130	B11	C1361	*G5	C2005	*F9	C2432	*F8	C2551	*J8	C2757	*G10	C2961	*K10	C3156	G12	C3408	*N12	C3646	*P11
C505	M4	C905	P3	C1131	*C11	C1362	*H5	C2006	*F9	C2433	*F8	C2552	*J8	C2758	*G10	C2962	*K10	C3157	G12	C3409	*P11	C3647	*P11
C506	M4	C906	P3	C1132	*C11	C1363	*H5	C2007	*F9	C2434	*F8	C2553	*J7	C2759	*G10	C2963	*L11	C3158	G12	C3410	*P11	C3648	*P11
C507	M1	C907	P3	C1133	*E5	C1364	*H5	C2008	*F9	C2435	G8	C2554	*H7	C2760	*H11	C2964	*K10	C3159	G12	C3501	*L12	C3649	*P11
C601	M3	C908	P3	C1201	*F6	C1365	*H5	C2009	*F9	C2436	*F8	C2555	*H8	C2801	J10	C3001	N11	C3160	H12	C3502	*B11	C3650	*R11
C602	M3	C909	J2	C1202	*E5	C1366	*H5	C2010	*F9	C2437	*F8	C2556	*J7	C2802	*H10	C3002	*N11	C3161	H12	C3503	*L12	C3651	C1
C603	M3	C910	*H2	C1203	*F4	C1367	H5	C2011	*F9	C2438	*F8	C2557	*H7	C2803	*J10	C3003	*N11	C3162	H12	C3504	*B11	C3652	C1
C604	M3	C911	J2	C1204	*F5	C1368	*H5	C2012	*F9	C2439	*F8	C2558	*H7	C2804	*J10	C3004	*N11	C3163	H12	C3505	*L12	C3653	*R12
C605	M4	C912	*H2	C1205	*F5	C1369	*H5	C2013	*F9	C2440	*F8	C2559	*J7	C2805	*J10	C3005	*N11	C3164	*J11	C3506	*B11	C3701	K4
C606	M4	C913	*N2	C1206	*F5	C1370	*H5	C2014	*F9	C2441	*F7	C2560	*J7	C2806	*J10	C3006	*N11	C3165	*J11	C3507	*L12	C3702	K4
C607	M4	C914	*N2	C1207	*F5	C1371	*H5	C2015	*F9	C2442	*F8	C2561	*J7	C2807	*J10	C3007	*N11	C3166	*K11	C3508	*B11	C3703	*K3

C2808	*J10	C3008	*N11	C3167	*K11	C3509	*L12	C3704	*K3	C4218	*L7	CL3501	P12	D1305	F4								
C2809	*J10	C3009	*N11	C3168	*K11	C3510	*B11	C3705	*K4	C4219	*L7	CL3601	R11	D1306	F4								
C2810	*J10	C3010	*N11	C3169	*K11	C3511	*L12	C3706	*K4	C4220	*L7	CL3602	R11	D1307	F4								
C2811	*J10	C3011	*N11	C3170	*K11	C3512	*B11	C3707	*K4	C4221	*L7	CL3603	R11	D1308	F4								
C2812	*J10	C3012	*N11	C3171	*L11	C3513	*L12	C3708	*K4	C4222	*L7	CL3604	P11	D2201	E8								
C2813	*J10	C3013	*N11	C3172	*L11	C3514	*B11	C3709	*K4	C4223	L7	CL3605	P11	D2202	E8								
C2814	*J10	C3014	*N11	C3173	*L11	C3515	*L12	C3710	*K4	C4224	L7	CL3606	P11	D2203	E8								
C2815	*J10	C3015	*N11	C3174	*L11	C3516	*B11	C3711	*K4	C4225	L7	CL3607	P11	D2204	E8								
C2816	*J10	C3016	*N11	C3175	*L11	C3517	*C11	C3712	*K4	C4226	*K7	CL3608	R11	D2301	H8								
C2817	*J10	C3017	*N11	C3176	*J11	C3518	L12	C3713	K4	C4227	*L7	CL3701	M3	D2302	H8								
C2818	*H10	C3018	*N11	C3177	*J11	C3519	*B11	C3714	*K3	C4228	*L7	CL3901	E4	D2303	H8								
C2819	*J10	C3019	*N11	C3178	*K11	C3520	*M12	C3801	E2	C4229	*L7	CL3902	E4	D2304	H8								
C2820	*J10	C3020	*N11	C3179	*K11	C3521	*L12	C3802	E2	C4230	K7	CL3903	E4	D2401	E1								
C2821	*J10	C3021	*N11	C3180	*K11	C3522	*L12	C3803	D2	C4231	K7	CL3904	E4	D2402	E1								
C2822	J10	C3022	M11	C3181	*K11	C3523	*L12	C3901	*G12	C4232	L7	CL3905	E4	D2403	E1								
C2823	J10	C3023	M11	C3182	*K11	C3524	*M12	C3902	*G12	C4233	L6	CL4101	D2	D2404	F1								
C2824	*J11	C3024	*M11	C3183	*K11	C3525	*L12	C3903	*G12	C4234	L7	CL4202	L7	D2405	F1								
C2825	*J11	C3025	*M11	C3184	*L11	C3526	*L12	C3904	*G12	C4235	K7			D2406	F1								
C2826	*J11	C3026	*M11	C3185	*L11	C3527	*L12	C3905	*G12	C4236	K7	CN501	R3	D2501	E1								
C2827	*J11	C3027	*M11	C3186	*L11	C3528	*M12	C3906	*G12	C4237	L7	CN502	M3	D2502	E1								
C2828	*H11	C3028	*L11	C3187	*L11	C3529	*L12	C3907	*F12	C4238	L6	CN1101	E9	D2503	E1								
C2829	*J11	C3029	*M11	C3188	*J11	C3530	*L12	C3908	*F12	C4239	K7	CN1102	A10	D2504	F1								
C2830	*J11	C3030	*M11	C3189	*J11	C3531	*L12	C3909	G12	C4240	K7	CN2201	E8	D2505	F1								
C2831	*J11	C3031	*M11	C3190	*K11	C3532	*M12	C3910	G12	C4241	L7	CN2202	E7	D2506	F1								
C2832	*H11	C3032	*L11	C3191	*K11	C3533	*L12	C3911	G12	C4242	L6	CN2203	E7	D2701	A2								
C2833	*J11	C3033	*M11	C3192	*K11	C3534	*L12	C3912	G12			CN2301	G9	D2702	A2								
C2834	*J11	C3034	*M11	C3193	*K11	C3535	*L12	C3913	G12	CL301	C8	CN2302	G9	D2703	A2								
C2835	*J11	C3035	*M11	C3194	*K11	C3536	*M12	C3914	G12	CL501	R3	CN2303	G8	D2704	A2								
C2836	*H11	C3036	*L11	C3195	*K11	C3537	*L12	C3915	F12	CL502	R3	CN3301	N8	D2705	A2								
C2837	*J11	C3037	*M11	C3196	*L11	C3538	*L12	C3916	F12	CL503	R3	CN3701	K2	D2706	A2								
C2838	*J11	C3038	*M11	C3197	*L11	C3539	*L12	C3917	A12	CL504	R3	CN3801	D1	D2707	A2								
C2839	*J11	C3039	*M11	C3198	*L11	C3540	*M12	C3918	E4	CL505	R3	CN3901	J1	D2708	A2								
C2840	*J11	C3040	*M11	C3199	*L11	C3541	*L12	C3919	E4	CL506	R3	CN3902	J1	D2709	A2								
C2841	J12	C3041	M12	C3200	*J11	C3542	*L12	C3920	*H12	CL507	R3	CN4101	C1	D2801	B2								
C2842	J12	C3042	M12	C3201	*J11	C3543	*L12	C3921	*H12	CL508	R3	CN4202	K6	D2802	B2								
C2843	J12	C3043	M12	C3202	*K11	C3544	*M12	C3922	*H12	CL801	F4			D2803	B2								
C2844	J12	C3044	M12	C3203	*K11	C3545	*L12	C3923	*H12	CL802	F4	CNB1	B12	D2901	B2								
C2901	K10	C3101	*F11	C3204	*K11	C3546	*L12	C3924	H12	CL803	F4	CNC1	C12	D2902	B2								
C2902	K10	C3102	*F11	C3205	*K11	C3547	*L12	C3925	H12	CL804	F4	CND1	D12	D2903	B2								
C2903	K10	C3103	*F11	C3206	*K11	C3548	*M12	C3926	H12	CL805	F4	CNE1	E12	D2904	B2								
C2904	K10	C3104	*G11	C3207	*K11	C3549	*L12	C3927	H12	CL806	F4	CNF1	F12	D2905	B2								
C2905	*K10	C3105	*G11	C3208	*L11	C3550	*L12	C3928	*H1	CL807	F4	CNG1	G12	D2906	B2								
C2906	*K10	C3106	*G11	C3209	*L11	C3551	*L12	C3929	*J2	CL808	F4	CNJ1	J12	D2907	B2								
C2907	K10	C3107	*G11	C3210	*L11	C3552	M12	C3930	*H1	CL809	F5	CNK1	K12	D2908	B2								
C2908	*L10	C3108	*G11	C3211	*L11	C3553	L12	C3931	*J2	CL810	F5	CNL1

D3703 M1
D3704 M1
D4101 D2
D4102 D2
D4103 D2
D4202 L7
D4203 L8
D4204 L8

DD201 B3
DD202 B4
DD203 B2
DD204 B6
DD205 B5

E1 E10
E2 *C10
E3 F10
E4 *H9
E5 N12
E6 *L11
E7 D7
E8 *C6
E9 K9
E10 *K6
E11 N7
E12 *N6
E13 E3
E14 *A2
E15 G4
E16 *F3
E17 K3
E18 *P2
E19 H12
E20 *F10
E21 R12
E22 R1

F201 B12
F202 A3
F203 A4
F204 A2
F205 A6
F206 A5

FB701 *R3
FB1501 J4
FB1801 *E8
FB1901 *H8
FB2401 E12
FB2402 *E12
FB2403 *D12
FB2404 *E12
FB2405 *D12
FB2501 F12
FB2502 *F12
FB2503 *E12
FB2504 *F12
FB2601 J10
FB2802 *J10
FB2803 *H10
FB2804 *H10
FB2805 *H10
FB3001 N11
FB3002 *N11
FB3003 *N10
FB3004 *N10
FB3005 *N10
FB4101 C2
FB4102 *C2
FB4103 *D3
FB4104 *C2
FB4105 *D2
FB4202 K7
FB4203 *K7
FB4204 *L7
FB4205 *L7
FB4206 *L7

IC1 F5
IC2 G5
IC3 F8
IC4 J8
IC5 P11
IC201 *B3
IC202 C3
IC203 C4
IC204 *C4
IC301 K8
IC302 E2
IC303 L8
IC304 D4
IC305 *R11
IC306 C7
IC401 B7
IC402 B7
IC410 A8
IC411 A8
IC412 B8
IC413 B8
IC501 M4
IC502 M4

IC601 N3
IC602 N4
IC603 N3
IC604 P3
IC605 N4
IC606 N4
IC701 N4
IC702 N3
IC703 P4
IC704 P4
IC705 N3
IC706 N2
IC707 *R3
IC801 F6
IC802 *F5
IC901 P3
IC902 J2
IC903 *J2
IC904 *N1
IC905 *N1
IC906 *N2
IC907 *P1
IC908 *M1
IC1001 D5
IC1002 F2
IC1003 F2
IC1004 F2
IC1005 F2
IC1006 G2
IC1007 G2
IC1008 G2
IC1009 G2
IC1010 H2
IC1011 H2
IC1102 *C12
IC1103 *C11
IC1104 *D12
IC1105 *D11
IC1106 C12
IC1107 C11
IC1108 D12
IC1109 D11
IC1110 B12
IC1111 *B12
IC1112 C11
IC1113 *C11
IC1114 *E5
IC1206 J6
IC1501 H4
IC1502 J5
IC1503 J4
IC1801 G8
IC1901 K8
IC2001 F9
IC2002 F9
IC2101 H9
IC2102 J9
IC2202 F7
IC2203 *E8
IC2204 *E7
IC2205 *E8
IC2206 *E7
IC2302 J7
IC2303 *H8
IC2304 *G8
IC2305 *H9
IC2306 *G9
IC2401 E12
IC2402 D11
IC2403 D11
IC2404 E12
IC2405 *E12
IC2501 F12
IC2502 E11
IC2503 E11
IC2504 F12
IC2505 *F12
IC2701 G10
IC2801 J10
IC2901 K10
IC3001 N11
IC3232 N11
IC3233 N11
IC3234 *N12
IC3235 *N12
IC3301 *P9
IC3302 *N9
IC3401 M12
IC3402 *M12
IC3403 M12
IC3404 *M12
IC3409 *P11
IC3410 *P11
IC3502 *P12
IC3503 *B11
IC3504 M12
IC3505 L12
IC3506 L12
IC3507 L12
IC3601 B1
IC3603 R11
IC3701 K4
IC3801 E1
IC3802 E1
IC3803 D1
IC3901 *G12
IC3902 *G12
IC3903 A12
IC3904 E4
IC3905 E4
IC3906 *H12
IC3907 *J1
IC4101 C2
IC4104 D2
IC4105 D2
IC4202 L7
IC4203 L7
IC4204 L7

L301 C7
L1201 J5
L2701 *G10
L2901 *K10

PS301 B7
PS3901 B12

Q201 C3
Q202 C3
Q203 C3
Q204 C3
Q205 C4
Q206 C4
Q207 C3
Q208 C3
Q209 *C4
Q210 *C4
Q211 *B4
Q212 *B3
Q213 *B5
Q214 *B7
Q401 B7
Q402 B7
Q403 B7
Q404 B7
Q801 F6
Q1001 D5
Q1002 D5
Q1201 J6
Q3501 R12
Q3502 *P12
Q3503 R12
Q3504 *P12
Q3505 P12
Q3506 P12
Q3601 R11
Q3602 R11
Q3603 R11
Q3604 R11
Q3605 R11
Q3606 R11
Q3607 R11
Q3608 R12
Q3609 R12
Q3610 R11
Q3611 R11
Q3612 R11
Q3613 R12
Q3614 R12
Q3615 *R12
Q3616 *R12

R201 *C4
R202 *C4
R203 *C4
R204 C3
R205 C3
R206 C3
R207 C3
R208 *B1
R209 *B1
R210 C3
R211 C3
R212 A12
R213 A12
R214 *A1
R215 C3
R216 C3
R217 *A1
R218 *A1
R219 C4
R220 C3
R221 C4
R222 C4
R223 *A1
R224 *A1
R225 C3
R226 C3
R227 *B3
R228 *B3
R229 *B3
R231 C3
R232 *A1
R233 *A1
R234 *C4
R235 *C4
R236 *C4
R237 *B7
R238 *C4
R239 *A1
R240 *A1
R241 *B4
R242 *B5
R243 *B3
R244 *B7
R245 *B4
R246 *B5
R247 *B3
R248 *B7
R249 B6
R250 *B3
R251 *B3
R252 *B4
R253 *B4
R254 *B2
R255 *B6
R256 *B5
R257 *B5
R258 *B3
R259 *B3
R260 *B4
R261 *B4
R262 *B2
R263 *B2
R264 *B6
R265 *B6
R266 *B5
R267 *B5
R268 *C3
R269 *C4
R270 *C2
R271 *C6
R272 *C5
R273 *C4
R274 *C4
R301 K8
R302 D3
R303 K8
R304 K8
R305 K8
R306 D2
R307 D2
R308 L8
R309 L8
R310 K8
R311 K8
R312 D2
R313 D2
R314 L8
R315 L8
R316 K9
R317 D2
R318 L9
R319 D4
R320 D4
R321 D4
R322 D4
R323 D4
R324 D4
R325 D4
R326 C8
R327 *A1
R329 *A1
R401 B7
R402 B7
R403 B7
R404 B7
R405 B7
R406 B7
R407 *B8
R408 *B8
R409 *A8
R412 F1
R413 F1
R414 F1
R415 L1
R501 *P3
R502 *P3
R503 *P3
R504 *M3
R505 *M3
R506 P3
R507 P3
R601 *M4
R602 *M4
R603 *N4
R604 *P4
R701 *R4
R702 R4
R801 F6
R802 F5
R822 F5
R823 *F5
R826 *F5
R832 *F5
R833 F5
R834 F5
R835 F5
R836 F5
R837 F5
R838 *F5
R839 E5
R840 E5
R901 J2
R902 *H2
R903 J3
R904 *J2
R905 J3
R906 *J3
R907 J2
R908 *H3
R909 H3
R910 *J2
R1001 D4
R1002 D4
R1003 D4
R1004 D5
R1005 D5
R1006 D5
R1007 D5
R1008 D5
R1009 D5
R1010 D5
R1011 D5
R1012 D5
R1013 D5
R1101 F4
R1102 F4
R1108 *C11
R1109 *D11
R1110 C11
R1111 D11
R1112 *B12
R1113 *C11
R1114 *E5
R1201 H5
R1202 H5
R1203 H5
R1204 H5
R1205 H5
R1206 H5
R1208 H5
R1209 H5
R1210 J5
R1211 J5
R1212 H5
R1213 H5
R1214 H5
R1215 H5
R1216 *G5
R1219 G5
R1220 G5
R1221 *G5
R1222 F5
R1223 F5
R1224 F5
R1225 G5
R1226 F5
R1227 F5
R1228 F5
R1229 E5
R1230 E5
R1231 E5
R1232 *G5
R1233 J6
R1234 J6
R1235 H5
R1236 J6
R1237 H5
R1238 *J6
R1239 *J6
R1240 *J6
R1241 *J6
R1242 E5
R1243 E5
R1244 J5
R1245 J5
R1246 F5
R1247 F5
R1248 F5
R1249 F5
R1250 F5
R1251 F5
R1252 *F5
R1253 *F5
R1254 *F5
R1255 *F5
R1256 F5
R1257 *G5
R1258 *G5
R1259 *G5
R1260 *G5
R1261 *G5
R1262 *F5
R1263 F5
R1264 F5
R1265 F5
R1266 F5
R1267 *F5
R1268 F5
R1269 *F5
R1270 F5
R1271 *F5
R1301 F5
R1302 G5
R1303 E8
R1304 H8
R1305 E8
R1306 H8
R1307 G5
R1308 *G5
R1401 G6
R1402 G6
R1403 *H6
R1404 *H6
R1405 *G6
R1406 *H6
R1407 *G5
R1408 *G5
R1409 *G5
R1410 *G5
R1503 *H4
R1504 H4
R1505 *H5
R1506 *H5
R1507 H4
R1508 *H5
R1509 H5
R1510 J4
R1511 H4
R1512 J4
R1513 J4
R1516 *J5
R1517 *H4
R1518 H4
R1519 *J5
R1520 *J5
R1801 *G8
R1803 *F7
R1804 *F7
R1805 *F7
R1806 *F7
R1807 G7
R1808 *F7
R1809 G7
R1810 *F7
R1811 G8
R1812 *G8
R1813 *G8
R1814 *G8
R1815 *G8
R1816 *G7
R1817 *G7
R1818 G7
R1819 G7
R1901 *K8
R1902 *J7
R1903 *J7
R1904 *J7
R1905 *J7
R1906 *J7
R1907 J7
R1908 *J7
R1909 J7
R1910 *J7
R1911 J8
R1912 J8
R1913 *J8
R1914 *J8
R1915 *J8
R1916 *J8
R1917 *J8
R1918 *K7
R1919 *K7
R2001 F8
R2002 F8
R2003 F8
R2004 F8
R2005 E8
R2006 F8
R2007 F8
R2008 E8
R2009 *F8
R2010 E8
R2011 *E9
R2012 F8
R2013 F8
R2014 F8
R2015 F8
R2016 *F9
R2017 *F9
R2018 G8
R2019 *G8
R2020 *G8
R2021 F8
R2022 F8
R2023 F8
R2024 F8
R2025 *G8
R2026 F8
R2027 F8
R2028 *F9
R2029 F8
R2030 F8
R2031 F8
R2032 F8
R2101 H8
R2102 J8
R2103 H8
R2104 J8
R2105 H8
R2106 J8
R2107 J8
R2108 H8
R2109 *H8
R2110 H8
R2111 *H9
R2112 H8
R2113 J8
R2114 H8
R2115 J8
R2116 *H9
R2117 *J9
R2118 J8
R2119 J8
R2120 *J8
R2121 J8
R2122 J8
R2123 J8
R2124 J8
R2125 *J8
R2126 J8
R2127 J8
R2128 *J9
R2129 J8
R2130 J8
R2131 J8
R2132 J8
R2201 E8
R2202 E8
R2203 *F8
R2204 *F8
R2205 E8
R2206 E8
R2207 E8
R2208 E8
R2209 E8
R2210 E8
R2211 *F7
R2212 *F7
R2213 *F7
R2214 *F7
R2215 E8
R2216 E8
R2217 *E8
R2218 *E8
R2219 F7
R2220 F7
R2221 F7
R2222 D8
R2223 E8
R2224 D7
R2225 D7
R2226 E7
R2227 E7
R2228 E7
R2229 E8
R2231 E8
R2232 E8
R2233 E8
R2234 E8
R2235 E8
R2236 E8
R2237 E8
R2238 E8
R2239 E8
R2240 E8
R2241 E8
R2242 E8
R2243 E8
R2244 E8
R2245 E8
R2246 E8
R2247 E8
R2248 E8
R2249 E8
R2250 E8
R2251 E8
R2252 E8
R2253 E8
R2254 E8
R2255 E8
R2256 E8
R2257 E8
R2258 E8
R2259 E8
R2260 E8
R2261 E8
R2262 E8
R2263 E8
R2264 E8
R2265 E8
R2266 E8
R2267 E8
R2268 E8
R2269 E8
R2270 E8
R2271 E8
R2272 E8
R2273 E8
R2274 E8
R2275 E8
R2276 E8
R2277 E8
R2278 E8
R2279 E8
R2280 E8
R2281 E8
R2282 E8
R2283 E8
R2284 E8
R2285 E8
R2286 E8
R2287 E8
R2288 E8
R2289 E8
R2290 E8
R2291 E8
R2292 E8
R2293 E8
R2294 E8
R2295 E8
R2296 E8
R2297 E8
R2298 E8
R2299 E8
R2300 E8
R2301 E8
R2302 E8
R2303 E8
R2304 E8
R2305 E8
R2306 E8
R2307 E8
R2308 E8
R2309 E8
R2310 E8
R2311 E8
R2312 E8
R2313 E8
R2314 E8
R2315 E8
R2316 E8
R2317 E8
R2318 E8
R2319 E8
R2320 E8
R2321 E8
R2322 E8
R2323 E8
R2324 E8
R2325 E8
R2326 E8
R2327 E8
R2328 E8
R2329 E8
R2330 E8
R2331 E8
R2332 E8
R2333 E8
R2334 E8
R2335 E8
R2336 E8
R2337 E8
R2338 E8
R2339 E8
R2340 E8
R2341 E8
R2342 E8
R2343 E8
R2344 E8
R2345 E8
R2346 E8
R2347 E8
R2348 E8
R2349 E8
R2350 E8
R2351 E8
R2352 E8
R2353 E8
R2354 E8
R2355 E8
R2356 E8
R2357 E8
R2358 E8
R2359 E8
R2360 E8
R2361 E8
R2362 E8
R2363 E8
R2364 E8
R2365 E8
R2366 E8
R2367 E8
R2368 E8
R2369 E8
R2370 E8
R2371 E8
R2372 E8
R2373 E8
R2374 E8
R2375 E8
R2376 E8
R2377 E8
R2378 E8
R2379 E8
R2380 E8
R2381 E8
R2382 E8
R2383 E8
R2384 E8
R2385 E8
R2386 E8
R2387 E8
R2388 E8
R2389 E8
R2390 E8
R2391 E8
R2392 E8
R2393 E8
R2394 E8
R2395 E8
R2396 E8
R2397 E8
R2398 E8
R2399 E8
R2400 E8
R2401 E8
R2402 E8
R2403 E8
R2404 E8
R2405 E8
R2406 E8
R2407 E8
R2408 E8
R2409 E8
R2410 E8
R2411 E8
R2412 E8
R2413 E8
R2414 E8
R2415 E8
R2416 E8
R2417 E8
R2418 E8
R2419 E8
R2420 E8
R2421 E8
R2422 E8
R2423 E8
R2424 E8
R2425 E8
R2426 E8
R2427 E8
R2428 E8
R2429 E8
R2430 E8
R2431 E8
R2432 E8
R2503 F12
R2504 F12
R2505 F12
R2506 F12
R2507 E12
R2508 E12
R2509 E12
R2510 F12
R2511 E12
R2512 E12
R2513 F12
R2515 F12
R2516 F12
R2517 F12
R2518 F12
R2519 E12
R2520 E12
R2521 E12
R2522 E12
R2523 E12
R2524 E12
R2525 E8
R2526 E8
R2527 E8
R2528 E8
R2529 E8
R2530 E8
R2531 E8
R2532 F12
R2701 H10
R2702 H10
R2703 G10
R2704 H10
R2705 H10
R2706 H10
R2707 H10
R2708 F10
R2709 F10
R2710 G10
R2711 G10
R2712 *A2
R2713 *A2
R2714 *A2
R2715 *A2
R2716 *A2
R2717 *A2
R2718 *A2
R2719 *A2
R2720 *A2
R2801 *J10
R2802 *J10
R2803 *J10
R2804 *J10
R2805 J10
R2806 J10
R2807 J10
R2808 J10
R2809 H10
R2810 H10
R2811 H10
R2812 J10
R2813 H10
R2814 *H10
R2815 *J10
R2816 *J10
R2817 H10
R2818 J10
R2819 *H10
R2820 J10
R2821 J10
R2822 J10
R2823 H10
R2824 J10
R2825 J10
R2826 J10
R2827 *B2
R2828 *B2
R2829 H10
R2830 *B2
R2831 J11
R2832 J11
R2833 J11
R2834 J11
R2835 J11
R2836 J11
R2837 J11
R2838 J11
R2839 *J12
R2840 *J12
R2841 *J12
R2842 *H12
R2901 L10
R2902 L10
R2903 L10
R2904 L10
R2905 L10
R2906 L10
R3034 M11
R3035 M11
R3036 M11
R3037 M11
R3038 M11
R3039 *M12
R3040 *M12
R3041 *M12
R3042 *L12
R3101 F11
R3102 F11
R3103 F11
R3104 F11
R3105 F11
R3106 G11
R3107 G11
R3108 G11
R3109 G11
R3110 G11
R3111 G11
R3112 G11
R3113 G11
R3114 G11
R3115 G11
R3116 G11
R3117 H11
R3118 H11
R3119 H11
R3120 H11
R3121 H11
R3122 H11
R3123 H11
R3124 H11
R3125 *G12
R3126 *G12
R3127 *H12
R3128 *F12
R3129 *G12
R3130 *H12
R3131 *F12
R3132 *G12
R3133 *H12
R3134 *F12
R3135 *G12
R3136 *H12
R3137 J11
R3138 J11
R3139 J11
R3140 K11
R3141 K11
R3142 K11
R3143 K11
R3144 K11
R3145 K11
R3146 K11
R3147 K11
R3148 K11
R3149 K11
R3150 K11
R3151 K11
R3152 L11
R3153 L11
R3154 L11
R3155 L11
R3156 L11
R3157 L11
R3158 L11
R3159 L11
R3160 L11
R3161 *K12
R3162 *K12
R3163 *L12
R3164 *K12
R3165 *K12
R3166 *L12
R3167 *J12
R3168 *K12
R3169 *L12
R3170 *J12
R3171 *K12
R3172 *L12
R3201 *P11
R3202 *P11
R3242 *N12
R3243 *N12
R3301 *P9
R3302 *P9
R3303 *P9
R3304 *P9
R3305 *P9
R3306 *P9
R3307 *P9
R3308 *P9
R3309 *N9
R3310 *N9
R3311 *N9
R3312 *N9
R3313 *N9
R3314 *N9
R3315 *N9
R3316 *P9
R3401 M12
R3402 M12
R3403 *M12
R3404 *M12
R3405 M12
R3406 *M12
R3407 M12
R3408 *M12
R3409 M12
R3410 *M12
R3411 M12
R3412 *M12
R3413 M12
R3414 M12
R3415 *M12
R3416 *N12
R3417 M12
R3418 *M12
R3419 M12
R3420 *N12
R3421 M12
R3422 *M12
R3423 M12
R3424 *M12
R3501 R12
R3504 *P12
R3505 P12
R3506 *P12
R3507 P12
R3508 P12
R3509 R12
R3510 *P12
R3511 P12
R3512 *P12
R3513 P12
R3514 P12
R3515 P12
R3516 P12
R3517 *P12
R3518 *P12
R3519 *C11
R3520 P12
R3601 R12
R3602 R12
R3603 *R12
R3604 *R12
R3605 *R12
R3606 *R12
R3607 R11
R3608 *R12
R3609 *R12
R3610 *P12
R3611 R11
R3612 R11
R3613 R11
R3614 R11
R3615 R11
R3616 R11
R3617 R11
R3618 R11
R3619 R11
R3620 *R11
R3621 *R11
R3622 R11
R3623 R11
R3625 R12
R3626 R12
R3627 *P12
R3628 *P12
R3629 *R12
R3630 *R12
R3632 *P12
R3633 *P12
R3634 R11
R3635 P12
R3636 B1
R3637 B1
R3638 B1
R3639 B1
R3640 B1
R3641 B1
R3642 *P11
R3643 *R12
R3701 K4
R3702 *K4
R3703 *K4
R3704 L1
R3705 M1
R3706 *K4
R3707 *K4
R3708 *K4
R3709 M1
R3710 *L3
R3711 M1
R3712 *K4
R3801 D1
R3802 D1
R3803 D1
R3804 D1
R3805 D1
R3806 D1
R3807 D2
R3808 D2
R3809 D2
R3810 D2
R3811 D2
R3812 D2
R3813 E2
R3814 E2
R3815 E2
R3816 E2
R3817 E2
R3818 E2
R3819 E2
R3820 E2
R3821 E2
R3822 E2
R3823 E2
R3824 E2
R3825 E2
R3826 E2
R3827 E2
R3828 E2
R3829 E2
R3830 E2
R3831 *E10
R3832 *E10
R3833 *D10
R3834 *E10
R3835 R11
R3836 R11
R3837 *D10
R3838 *D10
R3839 P11
R3840 *G8
R3841 G8
R3842 *G8
R3843 *G8
R3844 H5
R3845 H5
R3846 *G8
R3847 *G8
R3848 H5
R3849 K8
R3850 *K8
R3851 *K8
R3852 *M3
R3853 *M3
R3854 *M3
R3855 *M3
R3856 *K8
R3857 *N8
R3858 *N8
R3859 *N8
R3860 *M3
R3861 *N8
R3862 *N8
R3901 *G12
R3902 A11
R3903 A11
R3904 A11
R3905 A11
R3906 A12
R3907 A12
R3908 A12
R3909 A12
R3910 A12
R3911 A12
R3912 A12
R3913 A12
R3914 *J1
R3915 *J1
R3916 *J2
R3917 *J2
R3918 E4
R3919 E4
R3920 E4
R3921 E4
R3922 E4
R3923 E4
R4101 *C2
R4102 *C2
R4103 *C2
R4104 D2
R4105 D2
R4106 D2
R4107 C2
R4108 D2
R4109 D2
R4110 D2
R4111 D2
R4112 D2
R4113 *D2
R4114 *D2
R4115 *D2
R4116 D2
R4117 D2
R4118 *D2
R4119 D2
R4120 D2
R4121 D2
R4122 *D2
R4123 C2
R4124 D2
R4125 D2
R4126 *D2
R4127 D2
R4128 D2
R4129 *D2
R4130 D2
R4131 C2
R4132 C2
R4133 C2
R4134 C2
R4135 D2
R4136 D2
R4137 D2
R4138 D2
R4139 D1
R4140 C1
R4202 *L7
R4203 *L7
R4204 *L7
R4205 L7
R4206 L7
R4207 L7
R4208 K7
R4209 L7
R4210 L7
R4211 L7
R4212 L7
R4213 L7
R4214 *L7
R4215 *L7
R4216 *L7
R4217 L7
R4218 L7
R4219 *L7
R4220 L7
R4221 L7
R4222 L7
R4223 *L7
R4224 K7
R4225 L7
R4226 L7
R4227 *L7
R4228 L7
R4229 L8
R4230 *L7
R4231 L8
R4232 K7
R4233 L7
R4234 L7
R4235 L7
R4236 L7
R4237 L7
R4238 L7
R4239 L7
R4240 L6
R4241 K6

RB301 *R10
RB302 *B1
RB401 *A8
RB402 A8
RB403 A7

RB501 *R3
RB502 *R3
RB503 R3
RB504 R3
RB505 R3
RB506 R3
RB507 R3
RB508 R3
RB509 R2
RB510 R2
RB511 *R3
RB512 *R3
RB513 R3
RB514 R3
RB515 R2
RB516 R2
RB517 *P3
RB518 *P3
RB519 *P3
RB520 *P3
RB521 *P3
RB522 *P3
RB523 *P2
RB524 *P2
RB525 *P3
RB526 *P3
RB527 *P3
RB528 *P3
RB529 *P3
RB530 *P2
RB531 *P2
RB532 *M4
RB601 *M3
RB602 *M3
RB603 *M3
RB604 *M3
RB605 *M4
RB606 *M4
RB607 *M4
RB608 *N3
RB609 *N3
RB610 *N3
RB611 *N3
RB612 *P3
RB613 *P3
RB614 *P3
RB615 *P3
RB616 *N5
RB617 *N5
RB618 *N4
RB619 *N4
RB620 *N4
RB621 *N4
RB622 *N4
RB623 *N4
RB624 *N5
RB625 *N5
RB626 *N4
RB627 *N4
RB628 *N4
RB629 *N4
RB630 *N4
RB631 *N4
RB701 *M5
RB702 *M5
RB703 *M4
RB704 *M4
RB705 *M3
RB706 *M3
RB707 *M3
RB708 *M2
RB709 *P5
RB710 *P5
RB711 *P4
RB712 *P4
RB713 *P4
RB714 *P4
RB715 *P4
RB716 *P4
RB717 *N3
RB718 *N3
RB719 *N3
RB720 *N2
RB721 M2
RB722 M2
RB801 *F5
RB802 F5
RB803 *F5
RB804 *F5
RB805 *F5
RB806 *F5
RB807 F5
RB808 F4
RB901 *P3
RB902 *P3
RB903 *P3
RB904 *P2
RB905 *P3
RB906 *P3
RB907 *P3
RB908 *P2
RB909 N1
RB910 N1

RB911 P1
RB912 N1
RB913 E1
RB914 P1
RB915 *G1
RB916 *H1
RB917 E1
RB918 *G1
RB919 *G1
RB920 F1
RB921 F1
RB1207 *F5
RB1208 *F5
RB1209 *F5
RB1301 H4
RB1302 G4
RB1303 F4
RB1304 F4
RB1701 *F7
RB1702 *F7
RB1703 *J7
RB1704 *H7
RB1801 F7
RB1802 F7
RB1803 G7
RB1804 *G7
RB1805 *G7
RB1806 *G7
RB1807 G7
RB1808 *G7
RB1809 *G8
RB1810 *G8
RB1811 *G8
RB1812 G8
RB1813 *G8
RB1814 *G8
RB1815 G7
RB1816 G8
RB1817 *G7
RB1901 J7
RB1902 J7
RB1903 J7
RB1904 *J7
RB1905 *J7
RB1906 *J7
RB1907 K7
RB1908 *J7
RB1909 *J8
RB1910 *J8
RB1911 *J8
RB1912 K8
RB1913 *J8
RB1914 *J8
RB1915 K7
RB1916 K8
RB1917 *J7
RB2001 *E8
RB2002 *E8
RB2003 *E8
RB2004 E8
RB2005 *F8
RB2006 *E8
RB2007 *E8
RB2008 *F8
RB2009 *F8
RB2010 *F8
RB2011 *F8
RB2012 *F8
RB2013 *G8
RB2014 G8
RB2015 G8
RB2016 G8
RB2017 *F8
RB2018 F8
RB2019 *F8
RB2020 *F8
RB2021 *G8
RB2022 *G8
RB2023 *F8
RB2024 *G8
RB2101 *H8
RB2102 *H8
RB2103 *H8
RB2104 H8
RB2105 *J8
RB2106 *H8
RB2107 *H8
RB2108 *J8
RB2109 *J8
RB2110 *H8
RB2111 *H8
RB2112 *J8
RB2113 *J8
RB2114 J8
RB2115 J8
RB2116 J8
RB2117 *J8
RB2118 J8
RB2119 *J8
RB2120 *J8
RB2121 *J8
RB2122 *J8
RB2123 *J8
RB2124 *J8
RB2201 *E8
RB2202 *E8
RB2203 *E12
RB2204 E12
RB2205 E12
RB2206 E8
RB2207 E8
RB2301 *H8
RB2302 *H8
RB2303 *F12
RB2304 F12
RB2305 F12
RB2306 H8
RB2307 H8
RB2701 G10
RB2702 H10
RB2703 H10
RB2704 H10
RB2705 H10
RB2706 H10
RB2901 L10
RB2902 L10
RB2903 L10
RB2904 L10
RB2905 L10
RB2906 L10
RB3230 P11
RB3231 *P11
RB3232 *P11
RB3233 *P11
RB3235 N12
RB3236 N12
RB3237 N12
RB3238 N12
RB3239 N12
RB3240 N12
RB3241 N12
RB3242 N12
RB3243 *N12
RB3244 *N12
RB3245 *N12
RB3246 *N12
RB3501 P12
RB3502 P12
RB3503 P12
RB3504 P12
RB3505 P12
RB3506 P12
RB3507 P12
RB3508 *P12
RB3509 *P12
RB3510 *P12
RB3511 *P12
RB3512 *P12
RB3513 *P12
RB3514 *P12
RB3515 *L12
RB3516 *B11
RB3517 L12
RB3518 *B11
RB3519 *M12
RB3520 *L12
RB3521 *L12
RB3522 *L12
RB3523 M12
RB3524 L12
RB3525 L12
RB3526 L12
RB3601 P12
RB3602 R12
RB3603 R12
RB3604 R12
RB3605 R12
RB3606 R12
RB3607 *R11
RB3608 *R12
RB3609 N11
RB3610 B1
RB3611 *R11
RB3701 *L4
RB3702 L4
RB3703 *L4
RB3704 L4
RB3705 K4
RB3706 *K3
RB3707 *K3
RB3708 K3
RB3709 *K4
RB3710 K3
RB3711 K4
RB3712 *K4
RB3901 *G12
RB3902 *G12
RB3903 *G12
RB3904 *G12
RB3905 *F12
RB3906 *G12
RB3907 *G12
RB3908 *G12
RB3909 F12
RB3910 G12
RB3911 G12
RB3912 G12
RB3913 G12
RB3914 G12
RB3915 G12
RB3916 G12
RB3917 *G12
RB3918 *H12
RB3919 *H12
RB3920 G12
RB3921 H12
RB3922 H12

S401 F1
S402 F1
S403 L1
S501 M1
S901 E1
S902 G1
S903 G1
S904 F1
S1301 H3
S2201 E7
S2202 F6
S2301 H7
S2302 J7

SORI01 A9
SORI02 R9

T2801 J11
T3001 M11
T3101 F11
T3102 G11
T3103 H11
T3104 K11
T3105 K11
T3106 L11

TP219 B12
TP223 C3
TP224 C4
TP225 C2
TP226 C6
TP227 C5
TP301 K9
TP302 E2
TP303 L9
TP304 D4
TP901 P1
TP902 P1
TP903 P1
TP904 P1
TP1001 D5

X801 E5
X1301 G5
X2201 F7
X2301 J7
X2401 D12
X2501 E12
X2701 G10
X2801 J10
X2901 K10
X3001 M11
X3201 *P11
X3901 E4
X4101 D2
X4202 L7

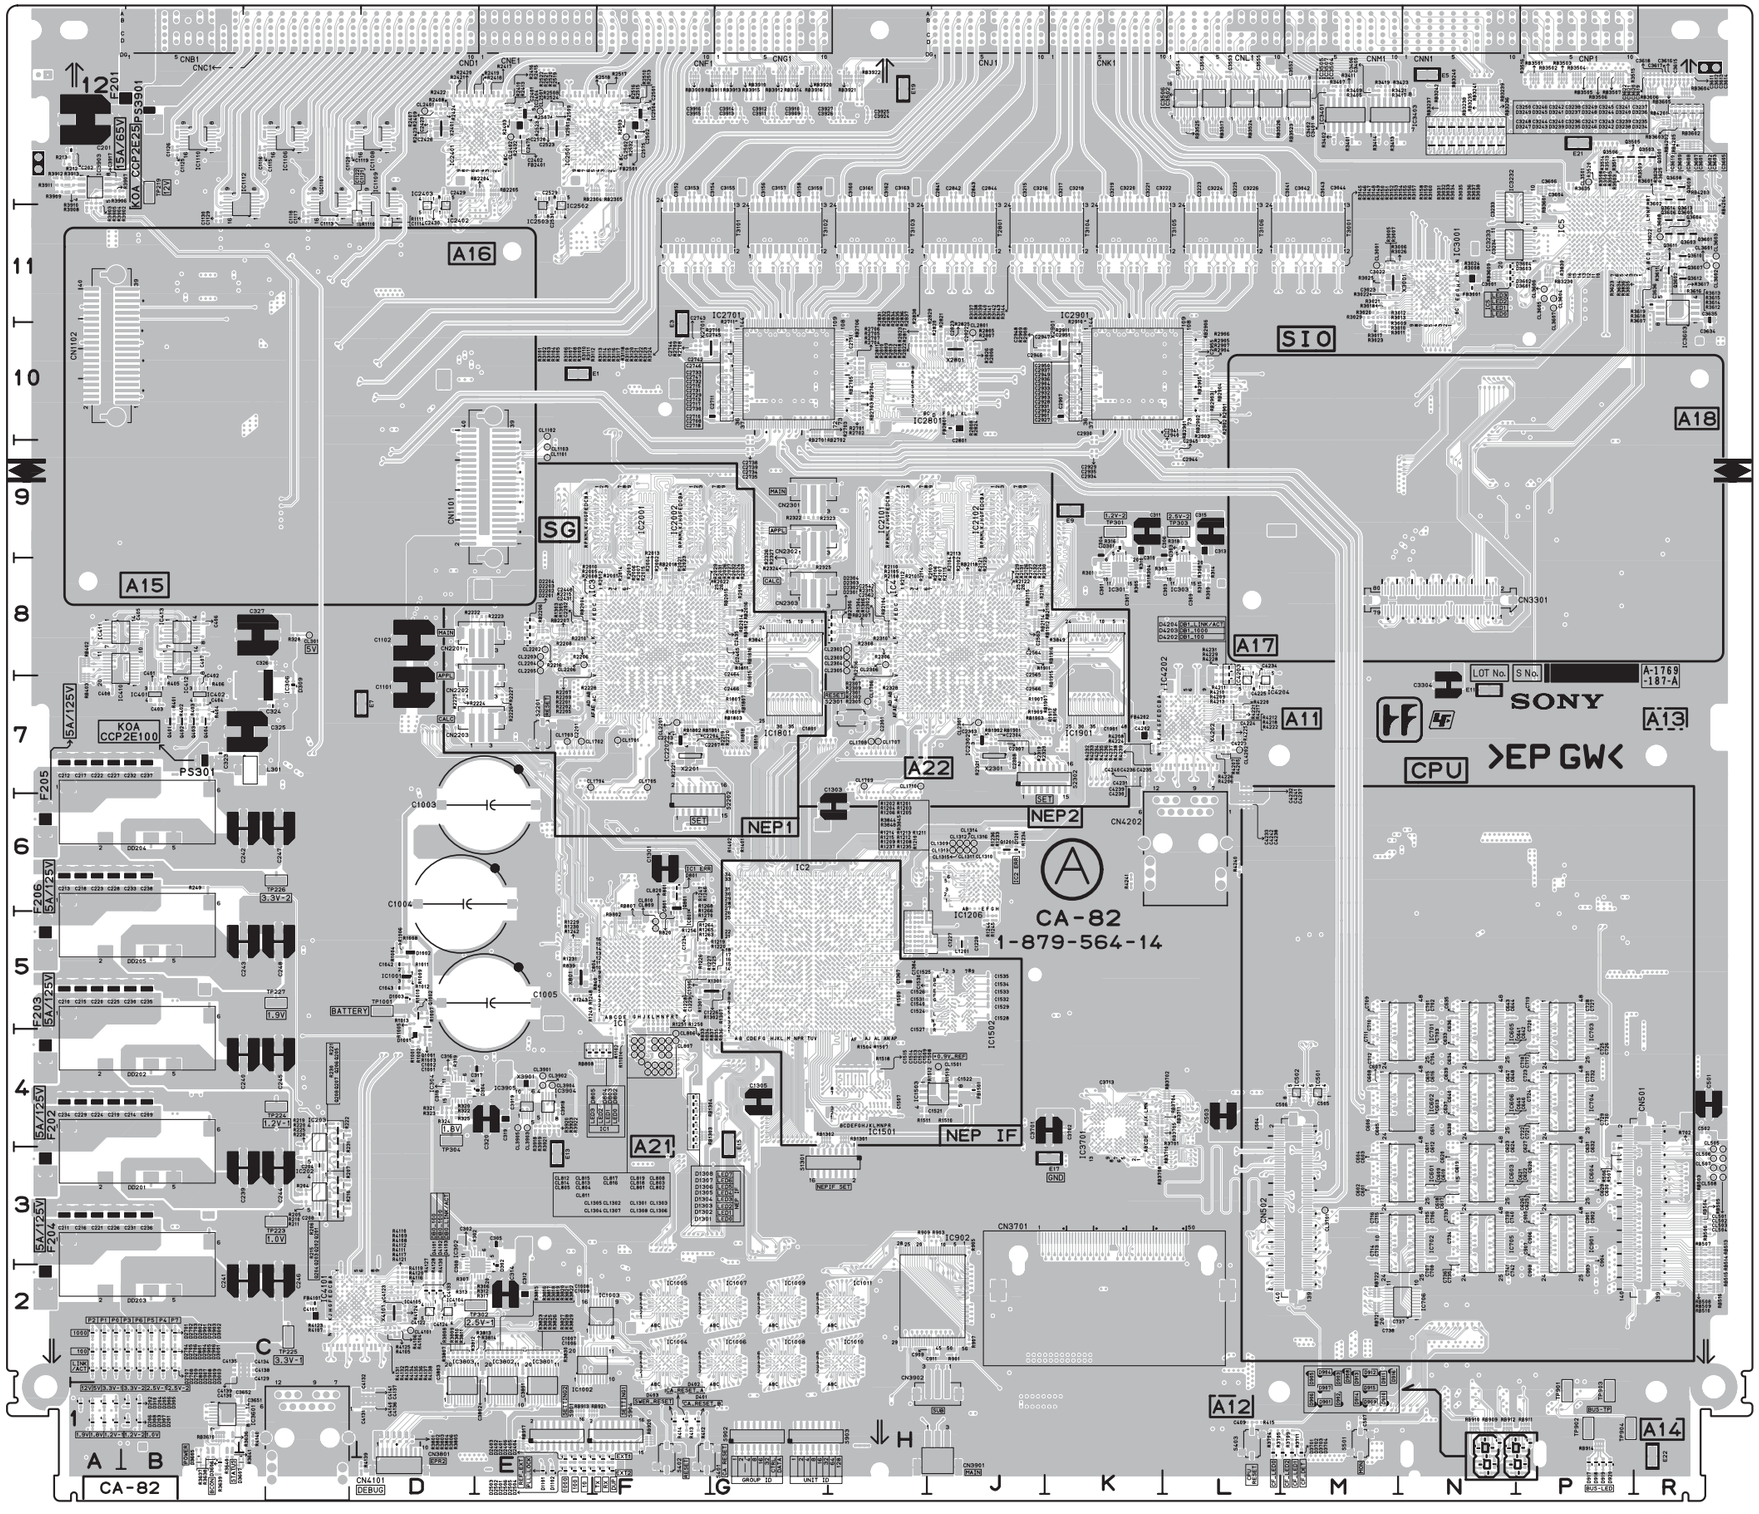

CA-82/82A -A SIDE-
SUFFIX: -14

5-2 (a) 5-2 (a)

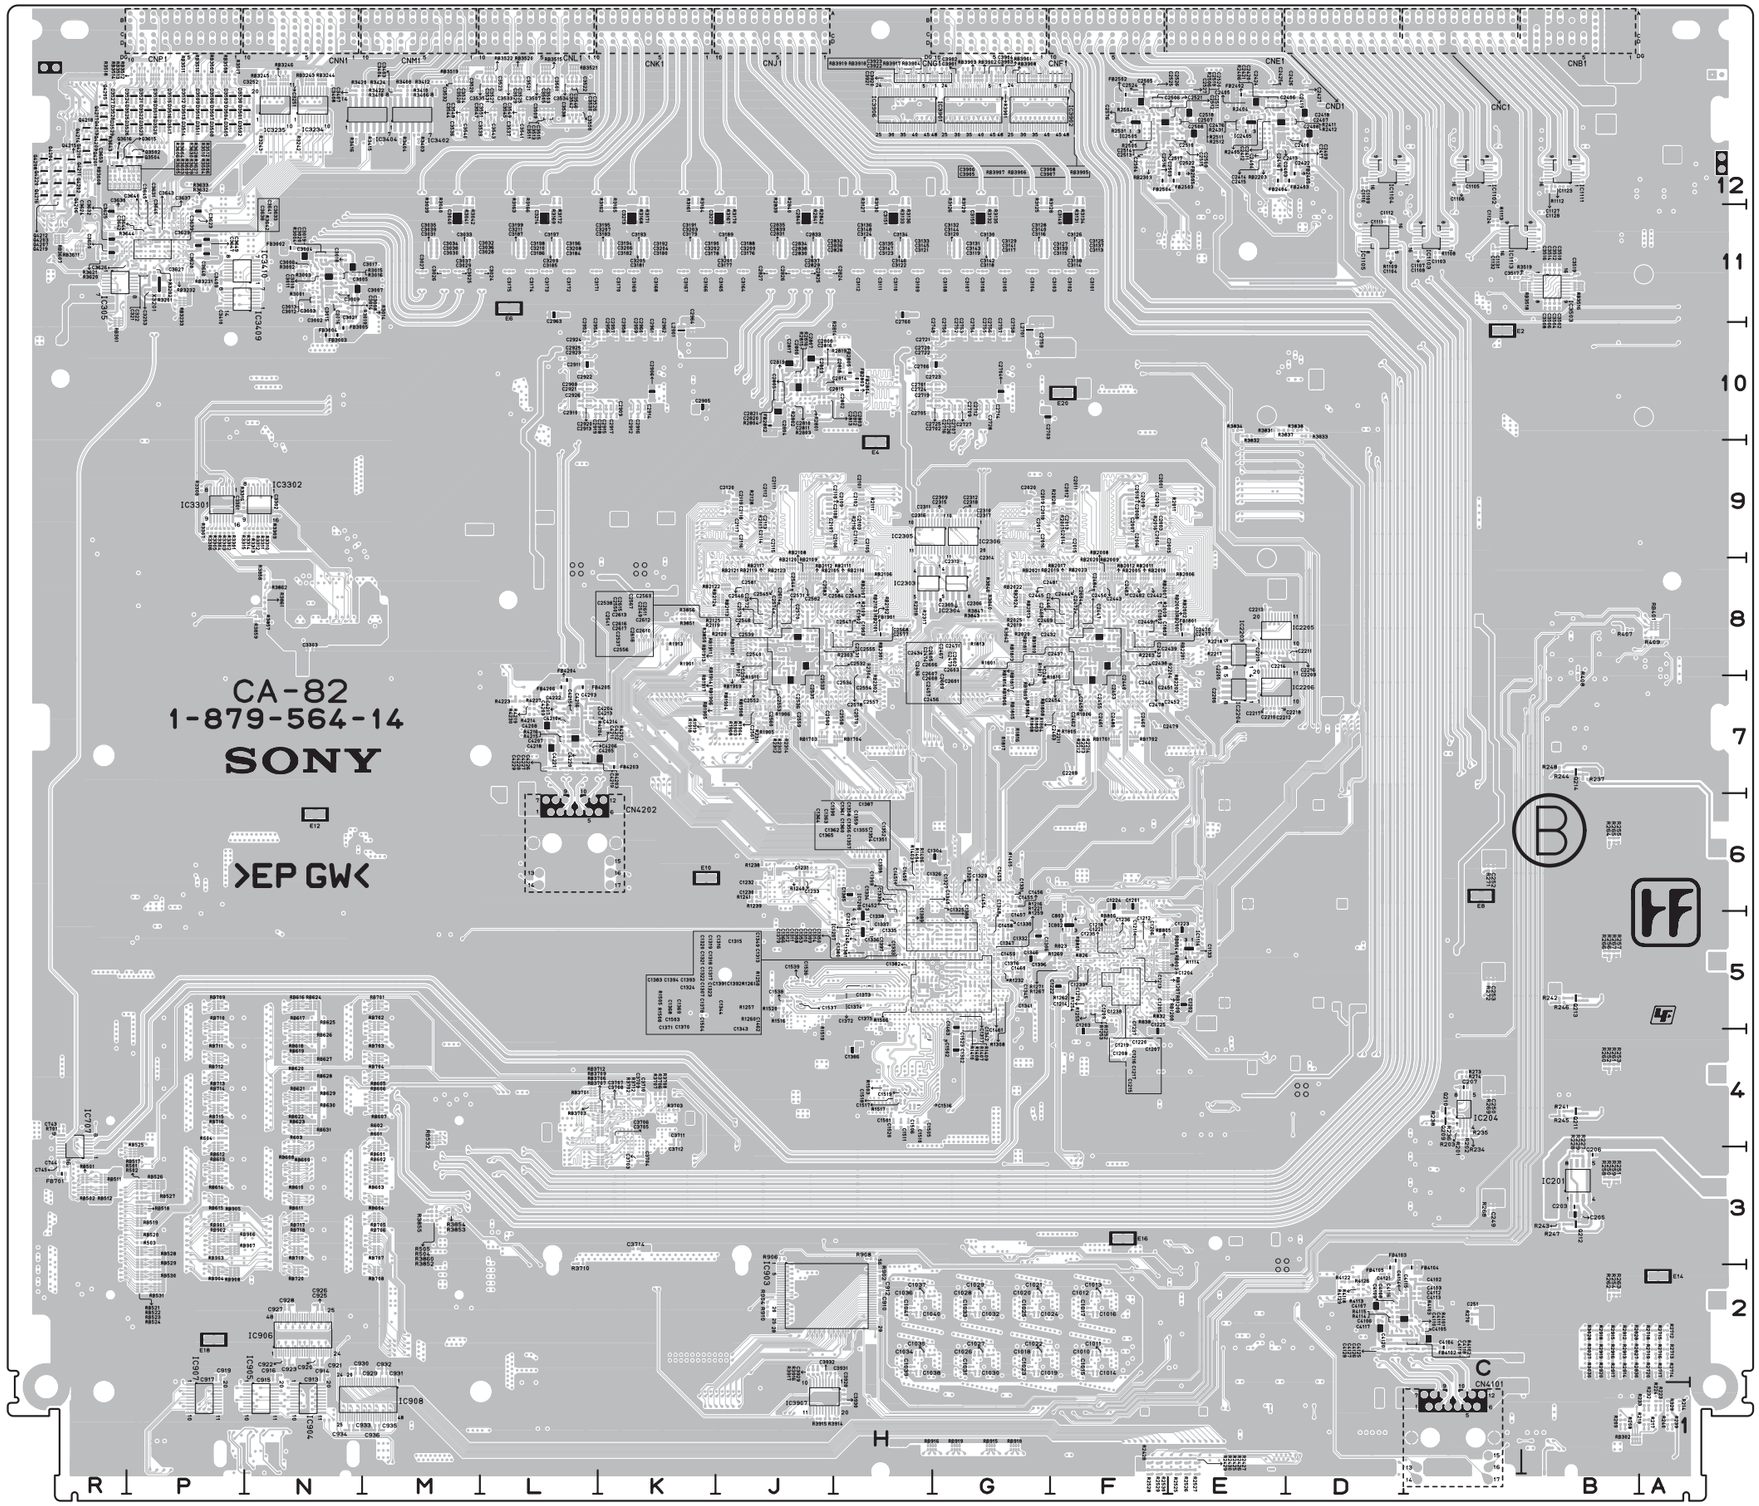
CA-82
1-879-564-14
SONY
>EP GW<
CN4202
CN4101
IC3301
IC3302
IC2303
IC2305
IC2306
IC204
IC201
IC906
IC908
IC907
IC909
IC910
IC911
IC912
IC913
IC914
IC915
IC916
IC917
IC918
IC919
IC920
IC921
IC922
IC923
IC924
IC925
IC926
IC927
IC928
IC929
IC930
IC931
IC932
IC933
IC934
IC935
IC936
IC937
IC938
IC939
IC940
IC941
IC942
IC943
IC944
IC945
IC946
IC947
IC948

CA-82/82A (1-879-564-14)
---
*:B SIDE

C201	A12	C608	M4	C915	*N2	C1208	*F5	C1370	*H5	C2014	*F9	C2441	*F7	C2560	*J7	C2806	*J10	C3006	*N11	C3165	*J11	C3507	*L12
C202	A12	C609	N3	C916	*N2	C1209	*F5	C1371	*H5	C2015	*F9	C2442	*F8	C2561	*J7	C2807	*J10	C3007	*N11	C3166	*K11	C3508	*B11
C203	*B3	C610	N3	C917	*P2	C1210	*F5	C1372	*H5	C2016	*G9	C2443	*F8	C2562	H8	C2808	*J10	C3008	*N11	C3167	*K11	C3509	*L12
C204	C3	C611	N3	C919	*P2	C1211	*F5	C1373	*H5	C2017	*G9	C2444	*F8	C2563	J8	C2809	*J10	C3009	*N11	C3168	*K11	C3510	*B11
C205	*B3	C612	N3	C920	*N2	C1212	*F5	C1374	*H5	C2018	*G9	C2445	*G8	C2564	J8	C2810	*J10	C3010	*N11	C3169	*K11	C3511	*L12
C206	*B3	C613	N4	C921	*N2	C1213	*F5	C1375	*H5	C2019	*G9	C2446	*F8	C2565	J8	C2811	*J10	C3011	*N11	C3170	*K11	C3512	*B11
C207	*C4	C614	N4	C922	*N2	C1214	*F5	C1376	*G5	C2020	*G9	C2447	*F8	C2566	J7	C2812	*J10	C3012	*N11	C3171	*L11	C3513	*L12
C208	C3	C615	N4	C923	*N2	C1215	*F5	C1377	*G5	C2101	*H9	C2448	E8	C2567	*J8	C2813	*J10	C3013	*N11	C3172	*L11	C3514	*B11
C209	B4	C616	N4	C925	*N2	C1216	*F5	C1378	*G5	C2102	*H9	C2449	*F8	C2568	*J8	C2814	*J10	C3014	*N11	C3173	*L11	C3515	*L12
C210	A5	C617	N3	C926	*N2	C1217	*F5	C1379	*H5	C2103	*H9	C2450	*F8	C2569	*J8	C2815	*J10	C3015	*N11	C3174	*L11	C3516	*B11
C211	A3	C618	N3	C927	*N2	C1218	*F5	C1380	*H5	C2104	*H9	C2451	*F7	C2570	*J8	C2816	*J10	C3016	*N11	C3175	*L11	C3517	*C11
C212	A7	C619	N3	C928	*N2	C1219	*F5	C1381	*H5	C2105	*H9	C2452	*F7	C2571	*J8	C2817	*J10	C3017	*N11	C3176	*J11	C3518	L12
C213	A6	C620	N3	C929	*N2	C1220	*F5	C1382	*H5	C2106	*J9	C2453	*F7	C2572	*J8	C2818	*H10	C3018	*N11	C3177	*J11	C3519	*B11
C214	B4	C621	N3	C930	*N2	C1221	*F5	C1383	*H5	C2107	*J9	C2454	*F8	C2573	*J8	C2819	*J10	C3019	*N11	C3178	*K11	C3520	*M12
C215	A5	C622	N3	C931	*M2	C1222	*F5	C1384	H5	C2108	*J9	C2455	*F7	C2574	*J8	C2820	*J10	C3020	*N11	C3179	*K11	C3521	*L12
C216	A3	C623	N3	C932	*M2	C1223	*E5	C1385	*H6	C2109	*J9	C2456	*F7	C2575	F12	C2821	*J10	C3021	*N11	C3180	*K11	C3522	*L12
C217	A7	C624	N3	C933	*N1	C1224	*F6	C1386	*H4	C2110	*J9	C2457	*F8	C2576	*F12	C2822	J10	C3022	M11	C3181	*K11	C3523	*L12
C218	A6	C625	P3	C934	*N1	C1225	*F4	C1387	*G5	C2111	*J9	C2458	*F8	C2577	*J8	C2823	J10	C3023	M11	C3182	*K11	C3524	*M12
C219	A4	C626	P3	C935	*M1	C1226	G5	C1388	*G5	C2112	*J9	C2459	*F7	C2578	*H8	C2824	*J11	C3024	*L11	C3183	*K11	C3525	*L12
C220	A5	C627	P3	C936	*M1	C1227	J5	C1389	*H5	C2113	*J9	C2460	*F7	C2579	*H7	C2825	*J11	C3025	*M11	C3184	*L11	C3526	*L12
C221	A3	C628	P3	C1001	D4	C1228	J5	C1390	*H5	C2114	*J9	C2461	*F7	C2580	*J7	C2826	*J11	C3026	*M11	C3185	*L11	C3527	*L12
C222	A7	C629	P3	C1002	D4	C1229	F5	C1391	*G5	C2115	*J9	C2462	*F7	C2581	*J8	C2827	*J11	C3027	*M11	C3186	*L11	C3528	*M12
C223	A6	C630	P3	C1003	E6	C1230	*J6	C1392	*G5	C2116	*J9	C2463	*F7	C2582	*J8	C2828	*J11	C3028	*M11	C3187	*L11	C3529	*L12
C224	A4	C631	P3	C1004	D6	C1231	*J6	C1393	*G5	C2117	*J9	C2464	G8	C2583	*J8	C2829	*J11	C3029	*M11	C3188	*J11	C3530	*L12
C225	A5	C632	P3	C1005	E5	C1232	*J6	C1394	*H5	C2118	*J9	C2465	G8	C2584	*J8	C2830	*J11	C3030	*M11	C3189	*J11	C3531	*L12
C226	A3	C633	N4	C1006	E2	C1233	*J6	C1395	F5	C2119	*J9	C2466	G7	C2601	*F8	C2831	*J11	C3031	*M11	C3190	*K11	C3532	*M12
C227	A7	C634	N4	C1007	E2	C1234	F5	C1396	*G5	C2120	*J9	C2467	*F8	C2602	*F8	C2832	*J11	C3032	*M11	C3191	*K11	C3533	*L12
C228	A6	C635	N5	C1008	F2	C1235	*F5	C1397	*H5	C2201	E7	C2468	*F8	C2603	*F8	C2833	*J11	C3033	*M11	C3192	*K11	C3534	*L12
C229	A4	C636	N5	C1009	F2	C1236	*F5	C1398	*H6	C2202	E8	C2469	*G8	C2604	*F8	C2834	*J11	C3034	*M11	C3193	*K11	C3535	*L12
C230	B5	C637	N4	C1010	*F2	C1237	*F5	C1399	*H6	C2203	F7	C2470	*F8	C2605	*F8	C2835	*J11	C3035	*M11	C3194	*K11	C3536	*M12
C231	B3	C638	N4	C1011	*F2	C1238	*F5	C1450	*H6	C2204	F7	C2471	*F8	C2606	*F8	C2836	*J11	C3036	*M11	C3195	*K11	C3537	*L12
C232	B7	C639	N4	C1012	*F2	C1239	*F5	C1451	*H6	C2205	*E8	C2472	*F8	C2607	*F8	C2837	*J11	C3037	*M11	C3196	*L11	C3538	*L12
C233	B6	C640	N4	C1013	*F2	C1240	*H5	C1452	*H5	C2206	*E7	C2473	*F8	C2608	*F8	C2838	*J11	C3038	*M11	C3197	*L11	C3539	*L12
C234	A4	C641	N4	C1014	*F2	C1241	*H5	C1453	*G6	C2207	F7	C2474	*F8	C2609	*F8	C2839	*J11	C3039	*M11	C3198	*L11	C3540	*M12
C235	B5	C642	N4	C1015	*F2	C1301	F6	C1454	*G6	C2208	*F7	C2475	E12	C2610	*J8	C2840	*J11	C3040	*M11	C3199	*L11	C3541	*L12
C236	B3	C643	N5	C1016	*F2	C1302	*G4	C1455	*G6	C2209	*E8	C2476	*E12	C2611	*J8	C2841	J12	C3041	L12	C3200	*J11	C3542	*L12
C237	B7	C644	N5	C1017	*F2	C1303	H6	C1456	*G6	C2210	*E7	C2477	*F8	C2612	*J8	C2842	J12	C3042	M12	C3201	*J11	C3543	*L12
C238	B6	C645	N4	C1018	*G2	C1304	*G6	C1457	*G5	C2211	*E8	C2478	*F8	C2613	*J8	C2843	J12	C3043	M12	C3202	*K11	C3544	*M12
C239	C3	C646	N4	C1019	*G2	C1305	G4	C1458	*G5	C2212	*E7	C2479	*F7	C2614	*J8	C2844	J12	C3044	M12	C3203	*K11	C3545	*L12
C240	C4	C647	N4	C1020	*G2	C1306	*G5	C1459	*G5	C2213	*E8	C2480	*F7	C2615	*J8	C2901	K10	C3101	*F11	C3204	*K11	C3546	*L12
C241	C2	C648	N4	C1021	*G2	C1307	*G5	C1460	*G5	C2214	*E8	C2481	*F8	C2616	*J8	C2902	K10	C3102	*F11	C3205	*K11	C3547	*L12
C242	C6	C701	N5	C1022	*G2	C1308	*G5	C1461	*G5	C2215	*E8	C2482	*F8	C2617	*J8	C2903	K10	C3103	*F11	C3206	*K11	C3548	*M12
C243	C5	C702	N5	C1023	*G2	C1309	*G5	C1462	*G5	C2216	*E8	C2483	*F8	C2618	*J8	C2904	K10	C3104	*G11	C3207	*K11	C3549	*L12
C244	C3	C703	N4	C1024	*G2	C1310	*G5	C1463	*G5	C2217	*E7	C2484	*F8	C2701	*G10	C2905	*K10	C3105	*G11	C3208	*L11	C3550	*L12
C245	C4	C704	N4	C1025	*G2	C1311	*H5	C1501	*H4	C2218	*E7	C2501	F12	C2702	*G10	C2906	*K10	C3106	*G11	C3209	*L11	C3551	*L12
C246	C2	C705	N3	C1026	*G2	C1312	*H5	C1502	*H4	C2301	H7	C2502	F12	C2703	*G10	C2907	K10	C3107	*G11	C3210	*L11	C3552	M12
C247	C6	C706	N3	C1027	*G2	C1313	*G5	C1503	*H5	C2302	H8	C2503	*F12	C2704	*G10	C2908	*L10	C3108	*G11	C3211	*L11	C3553	L12
C248	C5	C707	N3	C1028	*G2	C1314	*G5	C1504	*G5	C2303	J7	C2504	*F12	C2705	*H10	C2909	*K10	C3109	*H11	C3212	*J11	C3554	L12
C249	*C3	C708	N3	C1029	*G2	C1315	*G5	C1505	*H4	C2304	J7	C2505	*F12	C2706	*G10	C2910	*L10	C3110	*H11	C3213	*K11	C3555	L12
C250	*C4	C709	M5	C1030	*G2	C1316	*G5	C1506	*H4	C2305	*G8	C2506	*F12	C2707	*G10	C2911	*L10	C3111	*H11	C3214	*L11	C3601	R12
C251	*C2	C710	M5	C1031	*G2	C1317	*G5	C1507	H4	C2306	*G8	C2507	*E12	C2708	G10	C2912	*K10	C3112	*H11	C3215	J12	C3602	R12
C252	*C6	C711	M4	C1032	*G2	C1318	*G5	C1508	H4	C2307	J7	C2508	*E12	C2709	*G10	C2913	*L10	C3113	*F11	C3216	J12	C3603	R12
C253	*C5	C712	M4	C1033	*G2	C1319	*G5	C1509	H4	C2308	J7	C2509	*E12	C2710	G10	C2914	*K10	C3114	*F11	C3217	K12	C3604	P12
C301	K8	C713	M3	C1034	*H2	C1320	*G5	C1510	*H4	C2309	*G9	C2510	*E12	C2711	G10	C2915	*K10	C3115	*G11	C3218	K12	C3605	R12
C302	D3	C714	M3	C1035	*H2	C1321	*G5	C1511	*H4	C2310	*G9	C2511	*F12	C2712	*G10	C2916	*K10	C3116	*G11	C3219	K12	C3606	P12
C303	L8	C715	M3	C1036	*H2	C1322	*G5	C1512	H4	C2311	*H9	C2512	*F12	C2713	G10	C2917	*K10	C3117	*G11	C3220	K12	C3607	R12
C304	K9	C716	M3	C1037	*H2	C1323	*G5	C1513	H4	C2312	*G9	C2513	*F12	C2714	*G10	C2918	*K10	C3118	*G11	C3221	K12	C3608	R12
C305	E3	C717	P4	C1038	*H2	C1324	*G5	C1514	H4	C2313	*G8	C2514	*F12	C2715	G10	C2919	*L10	C3119	*G11	C3222	L12	C3609	R12
C306	L9	C718	P4	C1039	*H2	C1325	*G6	C1515	H4	C2314	*G8	C2515	*E12	C2716	*G10	C2920	*L10	C3120	*G11	C3223	L12	C3610	R12
C307	K8	C719	P5	C1040	*H2	C1326	*H6	C1516	*H4	C2315	*G9	C2516	*F12	C2717	G10	C2921	*L10	C3121	*H11	C3224	L12	C3611	R12
C308	D2	C720	P5	C1041	*H2	C1327	*G6	C1517	*H4	C2316	*H9	C2517	*E12	C2718	G10	C2922	*L10	C3122	*H11	C3225	L12	C3612	R12
C309	L8	C721	P4	C1042	D5	C1328	*G6	C1518	*H4	C2317	*G9	C2518	*E12	C2719	*G10	C2923	*L10	C3123	*H11	C3226	L12	C3613	R12
C310	K9	C722	P4	C1043	D5	C1329	*G6	C1519	*H4	C2318	*G9	C2519	*F12	C2720	*G10	C2924	*L10	C3124	*H11	C3233	N11	C3614	R12
C311	K9	C723	P4	C1101	D7	C1330	*G5	C1520	*H4	C2401	E12	C2520	*F12	C2721	*G10	C2925	*L10	C3125	*F11	C3234	N11	C3615	R12
C312	E2	C724	P4	C1102	D8	C1331	*G6	C1521	H4	C2402	E12	C2521	*E12	C2722	*G10	C2926	*L10	C3126	*F11	C3235	N12	C3616	R12
C313	L9	C725	P4	C1103	*C11	C1332	*G5	C1522	J4	C2403	*E12	C2522	*E12	C2723	*G10	C2927	K10	C3127	*G11	C3236	N12	C3617	R12
C314	E2	C726	P4	C1104	*D11	C1333	*H5	C1523	*G5	C2404	*E12	C2523	E12	C2724	*G10	C2928	K10	C3128	*G11	C3237	N12	C3618	R12
C315	L9	C727	P5	C1105	*C12	C1334	*H6	C1524	J5	C2405	*E12	C2524	*F12	C2725	*G10	C2929	K9	C3129	*G11	C3238	N12	C3619	R12
C316	D4	C728	P5	C1106	*C12	C1335	*H5	C1525	J5	C2406	*E12	C2525	*F12	C2726	*G10	C2930	K10	C3130	*G11	C3239	N12	C3620	R12
C317	E4	C729	P4	C1107	*C11	C1336	*H5	C1526	J5	C2407	*D12	C2526	*E12	C2727	*G10	C2931	K10	C3131	*G11	C3240	N12	C3621	R12
C318	D4	C730	P4	C1108	*C11	C1337	*H5	C1527	J4	C2408	*D12	C2527	*E12	C2728	*G10	C2932	K10	C3132	*G11	C3241	N12	C3622	R12
C319	E4	C731	P4	C1109	*D12	C1338	*H5	C1528	J5	C2409	*D12	C2528	E12	C2729	G10	C2933	K10	C3133	*H11	C3242	N12	C3623	*P11
C320	E4	C732	P4	C1110	*D12	C1339	*H6	C1529	J5	C2410	*D12	C2529	E12	C2730	G10	C2934	K9	C3134	*H11	C3243	N12	C3624	*R11
C321	*P11	C733	N3	C1111	*D11	C1340	*H6	C1530	J5	C2411	*E12	C2530	E11	C2731	G10	C2935	K9	C3135	*H11	C3244	N12	C3625	*R11
C322	*P11	C734	N3	C1112	*D11	C1341	*G5	C1531	J5	C2412	*E12	C2531	*J8	C2732	G10	C2936	K10	C3136	*H11	C3245	N12	C3626	*P11
C323	B7	C735	N3	C1113	C11	C1342	*G5	C1532	J5	C2413	*E12	C2532	*J8	C2733	G10	C2937	K10	C3137	*F11	C3246	N12	C3627	*P11
C324	C7	C736	N3	C1114	D11	C1343	*G5	C1533	J5	C2414	*E12	C2533	*J8	C2734	G9	C2940	L9	C3138	*F11	C3247	N12	C3628	*P11
C325	C7	C737	M2	C1115	C12	C1344	*G5	C1534	J5	C2415	*E12	C2534	*J7	C2735	G9	C2941	L9	C3139	*G11	C3248	N12	C3629	*P11
C326	C8	C738	M2	C1116	C12	C1345	*G5	C1535	J5	C2416	*E12	C2535	*J7	C2738	G10	C2944	L9	C3140	*G11	C3249	N12	C3630	*R11
C327	C8	C739	N3	C1117	C11	C1346	*G5	C1536	*J5	C2417	*D12	C2536	*J7	C2739	G9	C2945	L9	C3141	*G11	C3250	N12	C3631	*P12
C401	B7	C740	N3	C1118	C11	C1347	*G5	C1537	*J5	C2418	*D12	C2537	*J8	C2742	F10	C2946	K10	C3142	*G11	C3251	*N12	C3632	*R11
C402	B7	C741	N3	C1119	C12	C1348	*G5	C1538	*J5	C2419	*D12	C2538	*J8	C2743	F10	C2947	K10	C3143	*G11	C3252	*N12	C3633	*P11
C403	B7	C742	N3	C1120	C12	C1349	*G5	C1539	*J5	C2420	*E12	C2539	*J8	C2744	F10	C2948	J10	C3144	*G11	C3253	*P11	C3634	R10
C404	B7	C743	*R4	C1121	D11	C1350	*G5	C1540	J5	C2421	*E12	C2540	*J8	C2745	G10	C2949	K10	C3145	*H11	C3301	*P9	C3635	R11
C405	B8	C744	*R3	C1122	C11	C1351	*G5	C1801	G7	C2422	*D12	C2541	*J8	C2746	G10	C2950	K10	C3146	*H11	C3302	*N9	C3636	R11
C406	B8	C745	*R3	C1123	*B12	C1352	*G5	C1802	*F8	C2423	D12	C2542	H8	C2747	G10	C2951	K10	C3147	*H11	C3303	*N8	C3637	*P11
C407	B8	C801	F6	C1124	*C11	C1353	*G5	C1803	*F8	C2424	*E12	C2543	*H8	C2748	*G10	C2952	*K10	C3148	*H11	C3304	N7	C3638	*P11
C408	A7	C803	*F5	C1125	B12	C1354	*G5	C1901	K7	C2425	*E12	C2544	*J8	C2750	*G10	C2954	*K10	C3149	*F11	C3401	M12	C3639	*P11
C409	L1	C804	E5	C1126	B12	C1355	*G5	C1902	*H8	C2426	*D12	C2545	*J8	C2751	H10	C2955	L10	C3150	*G11	C3402	M12	C3640	*P11
C501	R4	C901	P3	C1127	*B12	C1356	*G5	C1903	*H8	C2427	*D12	C2546	*J8	C2752	*G10	C2956	*K10	C3151	*H11	C3403	*M12	C3641	*P11
C502	R4	C902	P3	C1128	*B12	C1357	*G5	C2001	*F9	C2428	D12	C2547	*J8	C2753	*G10	C2957	*K10	C3152	F12	C3404	*M12	C3642	*P11
C503	L4	C903	P3	C1129	B11	C1358	*G5	C2002	*F9	C2429	D12	C2548	*J8	C2754	*G10	C2958	*K10	C3153	F12	C3405	M12	C3643	*P11
C504	L4	C904	P3	C1130	B11	C1359	*G5	C2003	*F9	C2430	D11	C2549	*J8	C2755	*G10	C2959	*K10	C3154	F12	C3406	M12	C3644	*P11
C505	M4	C905	P3	C1131	*C11	C1360	*G5	C2004	*F9	C2431	E8	C2550	*J8	C2756	*G10	C2960	*K10	C3155	G12	C3407	*N12	C3645	*P11
C506	M4	C906	P3	C1132	*C11	C1361	*G5	C2005	*F9	C2432	*F8	C2551	*J8	C2757	*G10	C2961	*K10	C3156	G12	C3408	*N12	C3646	*P11
C507	M1	C907	P3	C1133	*E5	C1362	*H5	C2006	*F9	C2433	*F8	C2552	*J8	C2758	*G10	C2962	*K10	C3157	G12	C3409	*P11	C3647	*P11
C601	M3	C908	P3	C1201	*F6	C1363	*H5	C2007	*F9	C2434	*F8	C2553	*J7	C2759	*G10	C2963	*L11	C3158	G12	C3410	*P11	C3648	*P11
C602	M3	C909	J2	C1202	*E5	C1364	*H5	C2008	*F9	C2435	G8	C2554	*H7	C2760	*H11	C2964	*K10	C3159	G12	C3501	*L12	C3649	*P11
C603	M3	C910	*H2	C1203	*F4	C1365	*H5	C2009	*F9	C2436	*F8	C2555	*H8	C2801	J10	C3001	N11	C3160	H12	C3502	*B11	C3650	*R11
C604	M3	C911	J2	C1204	*F5	C1366	*H5	C2010	*F9	C2437	*F8	C2556	*J7	C2802	*H10	C3002	*N11	C3161	H12	C3503	*L12	C3651	C1
C605	M4	C912	*H2	C1205	*F5	C1367	H5	C2011	*F9	C2438	*F8	C2557	*H7	C2803	*J10	C3003	*N11	C3162	H12	C3504	*B11	C3652	C1
C606	M4	C913	*N2	C1206	*F5	C1368	*H5	C2012	*F9	C2439	*F8	C2558	*H7	C2804	*J10	C3004	*N11	C3163	H12	C3505	*L12	C3653	*R12
C607	M4	C914	*N2	C1207	*F5	C1369	*H5	C2013	*F9	C2440	*F8	C2559	*J7	C2805	*J10	C3005	*N11	C3164	*J11	C3506	*B11	C3701	K4

C3702	K4	C4216	*L7	CL2801	J10	D1304	F4																
C3703	*K3	C4217	*L7	CL3001	M11	D1305	F4																
C3704	*K3	C4218	*L7	CL3501	P12	D1306	F4																
C3705	*K4	C4219	*L7	CL3601	R11	D1307	F4																
C3706	*K4	C4220	*L7	CL3602	R11	D1308	F4																
C3707	*K4	C4221	*L7	CL3603	R11	D2201	E8																
C3708	*K4	C4222	*L7	CL3604	P11	D2202	E8																
C3709	*K4	C4223	L7	CL3605	P11	D2203	E8																
C3710	*K4	C4224	L7	CL3606	P11	D2204	E8																
C3711	*K4	C4225	L7	CL3607	P11	D2301	H8																
C3712	*K4	C4226	*K7	CL3608	R11	D2302	H8																
C3713	K4	C4227	*L7	CL3701	M3	D2303	H8																
C3714	*K3	C4228	*L7	CL3901	E4	D2304	H8																
C3801	E2	C4229	*L7	CL3902	E4	D2401	E1																
C3802	E2	C4230	K7	CL3903	E4	D2402	E1																
C3803	D2	C4231	K7	CL3904	E4	D2403	E1																
C3901	*G12	C4232	L7	CL3905	E4	D2404	F1																
C3902	*G12	C4233	L6	CL4101	D2	D2405	F1																
C3903	*G12	C4234	L7	CL4202	L7	D2406	F1																
C3904	*G12	C4235	K7			D2501	E1																
C3905	*G12	C4236	K7	CN501	R3	D2502	E1																
C3906	*G12	C4237	L7	CN502	M3	D2503	E1																
C3907	*F12	C4238	L6	CN1101	E9	D2504	F1																
C3908	*F12	C4239	K7	CN1102	A10	D2505	F1																
C3909	G12	C4240	K7	CN2201	E8	D2506	F1																
C3910	G12	C4241	L7	CN2202	E7	D2701	A2																
C3911	G12	C4242	L6	CN2203	E7	D2702	A2																
C3912	G12			CN2301	G9	D2703	A2																
C3913	G12	CL301	C8	CN2302	G9	D2704	A2																
C3914	G12	CL501	R3	CN2303	G8	D2705	A2																
C3915	F12	CL502	R3	CN3301	N8	D2706	A2																
C3916	F12	CL503	R3	CN3701	K2	D2707	A2																
C3917	A12	CL504	R3	CN3801	D1	D2708	A2																
C3918	E4	CL505	R3	CN3901	J1	D2709	A2																
C3919	E4	CL506	R3	CN3902	J1	D2801	B2																
C3920	*H12	CL507	R3	CN4101	C1	D2802	B2																
C3921	*H12	CL508	R3	CN4202	K6	D2803	B2																
C3922	*H12	CL801	F4	CNB1	B12	D2901	B2																
C3923	*H12	CL802	F4	CNC1	C12	D2902	B2																
C3924	H12	CL803	F4	CND1	D12	D2903	B2																
C3925	H12	CL804	F4	CNE1	E12	D2904	B2																
C3926	H12	CL805	F4	CNF1	F12	D2905	B2																
C3927	H12	CL806	F4	CNG1	G12	D2906	B2																
C3928	*H1	CL807	F4	CNJ1	J12	D2907	B2																
C3929	*J2	CL808	F4	CNK1	K12	D2908	B2																
C3930	*H1	CL809	F5	CNL1	L12	D2909	B2																
C3931	*J2	CL810	F5	CNM1	M12	D3001	B2																
C3932	*J2	CL811	F4	CNN1	N12	D3002	B2																
C4101	C2	CL812	F4	CNP1	P12	D3003	B2																
C4102	*C2	CL813	F4			D3234	N12																
C4103	*C2	CL814	F4	D201	B1	D3235	N12																
C4104	*C2	CL815	F4	D202	A1	D3236	N12																
C4105	*C2	CL816	F4	D203	A1	D3237	N12																
C4106	*D2	CL817	F4	D204	A1	D3238	N12																
C4107	*D2	CL818	F4	D205	A1	D3239	N12																
C4108	*D2	CL819	F4	D206	A1	D3240	N12																
C4109	*D2	CL820	F5	D301	K9	D3241	N12																
C4110	*C2	CL1101	E9	D302	E2	D3242	N12																
C4111	*C2	CL1102	E10	D303	L9	D3243	N12																
C4112	*C2	CL1103	E9	D304	E4	D3244	N12																
C4113	*C2	CL1301	F4	D305	B1	D3245	N12																
C4114	*D2	CL1302	F4	D306	B1	D3246	N12																
C4115	*C2	CL1303	F4	D307	B1	D3247	N12																
C4116	*D2	CL1304	F4	D308	A1	D3248	N12																
C4117	*D2	CL1305	F4	D309	C7	D3249	N12																
C4118	*C2	CL1306	F4	D310	A1	D3501	*N12																
C4119	*C2	CL1307	F4	D401	F1	D3502	*N12																
C4120	*D2	CL1308	F4	D402	F1	D3503	*P12																
C4121	*D2	CL1309	J6	D403	F1	D3504	*P12																
C4122	D2	CL1310	J6	D801	F6	D3505	*P12																
C4123	D2

D3702	M1	IC502	M4	IC3603	R11	R212	A12	R501	*P3	R1252	*F5	R2018	G8	R2403	E12	R2826	J10	R3125	*G11	R3514	P12	R3845	H5	R4224	K7	RB717	*N3	RB2024	*G8	RB3611	*R11
D3703	M1	IC601	N3	IC3701	K4	R213	A12	R502	*P3	R1253	*F5	R2019	*G8	R2404	*E12	R2827	*B2	R3126	*G11	R3515	P12	R3846	*G8	R4225	L7	RB718	*N3	RB2101	*H8	RB3701	*L4
D3704	M1	IC602	N4	IC3801	E1	R214	*A1	R503	*P3	R1254	*F5	R2020	*G8	R2405	*E12	R2828	*B2	R3127	*H11	R3516	P12	R3847	*G8	R4226	L7	RB719	*N3	RB2102	*H8	RB3702	L4
D4101	D2	IC603	N3	IC3802	E1	R215	C3	R504	*M3	R1255	*F5	R2021	F8	R2406	*E12	R2829	H10	R3128	*G11	R3517	*P12	R3848	H5	R4227	*L7	RB720	*N2	RB2103	*H8	RB3703	*L4
D4102	D2	IC604	P3	IC3803	D1	R216	C3	R505	*M3	R1256	F5	R2022	F8	R2407	D12	R2830	*B2	R3129	*G11	R3518	*P12	R3849	K8	R4228	L7	RB721	M2	RB2104	H8	RB3704	L4
D4103	D2	IC605	N4	IC3901	*G12	R217	*A1	R506	P3	R1257	*G5	R2023	F8	R2408	D12	R2831	H11	R3130	*H11	R3519	*C11	R3850	*K8	R4229	L8	RB722	M2	RB2105	*J8	RB3705	K4
D4202	L7	IC606	N4	IC3902	*G12	R218	*A1	R507	P3	R1258	*G5	R2024	F8	R2409	D12	R2832	J11	R3131	*F11	R3520	P12	R3851	*K8	R4230	*L7	RB801	*F5	RB2106	*H8	RB3706	*K3
D4203	L8	IC701	N4	IC3903	A12	R219	C4	R601	*M4	R1259	*G5	R2025	*G8	R2410	E12	R2833	J11	R3132	*G11	R3601	R12	R3852	*M3	R4231	L8	RB802	F5	RB2107	*H8	RB3707	*K3
D4204	L8	IC702	N3	IC3904	E4	R220	C3	R602	*M4	R1260	*G5	R2026	F8	R2411	*D12	R2834	J11	R3133	*H11	R3602	R12	R3853	*M3	R4232	K7	RB803	*F5	RB2108	*J8	RB3708	K3
		IC703	P4	IC3905	E4	R221	C4	R603	*N4	R1261	*G5	R2027	F8	R2412	*D12	R2835	J11	R3134	*F11	R3603	*R12	R3854	*M3	R4233	L7	RB804	*F5	RB2109	*J8	RB3709	*K4
DD201	B3	IC704	P4	IC3906	*H12	R222	C4	R604	*P4	R1262	*F5	R2028	*F9	R2413	E12	R2836	J11	R3135	*G11	R3604	*R12	R3855	*M3	R4234	L7	RB805	*F5	RB2110	*H8	RB3710	K3
DD202	B4	IC705	N3	IC3907	*J1	R223	*A1	R701	*R4	R1263	F5	R2029	F8	R2415	E12	R2837	J11	R3136	*H11	R3605	*R12	R3856	*K8	R4235	L7	RB806	*F5	RB2111	*H8	RB3711	K4
DD203	B2	IC706	N2	IC4101	C2	R224	*A1	R702	R4	R1264	F5	R2030	F8	R2416	E12	R2838	J11	R3137	J11	R3606	*R12	R3857	*N8	R4236	L7	RB807	F5	RB2112	*J8	RB3712	*K4
DD204	B6	IC707	*R3	IC4104	D2	R225	C3	R801	F6	R1265	F5	R2031	F8	R2417	E12	R2839	*J11	R3138	J11	R3607	R11	R3858	*N8	R4237	L7	RB808	F4	RB2113	*J8	RB3901	*G12
DD205	B5	IC801	F6	IC4105	D2	R226	C3	R820	F5	R1266	F5	R2032	F8	R2418	E12	R2840	*J11	R3139	J11	R3609	*R12	R3859	*N8	R4238	L7	RB901	*P3	RB2114	J8	RB3902	*G12
		IC802	*F5	IC4202	L7	R227	*B3	R823	*F5	R1267	*F5	R2101	H8	R2419	D12	R2841	*J11	R3140	J11	R3611	R11	R3860	*M3	R4239	L7	RB902	*P3	RB2115	J8	RB3903	*G12
E1	E10	IC901	P3	IC4203	L7	R228	*B3	R826	*F5	R1268	F5	R2102	J8	R2420	D12	R2842	*J11	R3141	K11	R3612	R11	R3861	*N8	R4240	L6	RB903	*P3	RB2116	J8	RB3904	*G12
E2	*C10	IC902	J2	IC4204	L7	R229	*B3	R832	*F5	R1269	*F5	R2103	H8	R2421	D12	R2901	L10	R3142	K11	R3613	R11	R3862	*N8	R4241	K6	RB904	*P2	RB2117	*J8	RB3905	*F12
E3	F10	IC903	*J2			R230	C3	R833	F5	R1270	F5	R2104	J8	R2422	D12	R2902	L10	R3143	K11	R3614	R11	R3901	*G12			RB905	*P3	RB2118	J8	RB3906	*G12
E4	*H9	IC904	*N1	L301	C7	R231	C3	R834	F5	R1271	*F5	R2105	H8	R2423	D12	R2903	L9	R3144	K11	R3615	R11	R3902	A11	RB301	*R10	RB906	*P3	RB2119	*J8	RB3907	*G12
E5	N12	IC905	*N1	L1201	J5	R232	*A1	R835	F5	R1301	F5	R2106	J8	R2424	D12	R2904	L10	R3145	K11	R3616	R11	R3903	A11	RB302	*B1	RB907	*P3	RB2120	*J8	RB3908	*G12
E6	*L11	IC906	*N2	L2701	*G10	R233	*A1	R836	F5	R1302	G5	R2107	J8	R2425	*E1	R2905	L10	R3146	K11	R3617	R11	R3904	A11	RB401	*A8	RB908	*P2	RB2121	*J8	RB3909	F12
E7	D7	IC907	*P1	L2901	*K10	R234	*C4	R837	F5	R1303	E8	R2108	H8	R2426	*E1	R2906	L10	R3147	K11	R3618	R11	R3905	A11	RB402	A8	RB909	N1	RB2122	*J8	RB3910	G12
E8	*C6	IC908	*M1			R235	*C4	R838	*F5	R1304	H8	R2109	*H8	R2427	*E1	R2907	L10	R3148	K11	R3619	R11	R3906	A12	RB403	A7	RB910	N1	RB2123	*J8	RB3911	G12
E9	K9	IC1001	D5	PS301	B7	R236	*C4	R839	E5	R1305	E8	R2110	H8	R2428	*F1	R2908	K10	R3149	K11	R3620	*R11	R3907	A12	RB501	*R3	RB911	P1	RB2124	*J8	RB3912	G12
E10	*K6	IC1002	F2	PS3901	B12	R237	*B7	R840	E5	R1306	H8	R2111	*H9	R2429	*F1	R2909	J10	R3150	K11	R3621	*R11	R3908	A12	RB502	*R3	RB912	N1	RB2201	*E8	RB3913	G12
E11	N7	IC1003	F2			R238	*C4	R901	J2	R1307	G5	R2112	H8	R2430	*F1	R2910	K10	R3151	K11	R3622	R11	R3909	A12	RB503	R3	RB913	E1	RB2202	*E8	RB3914	G12
E12	*N6	IC1004	F2	Q201	C3	R239	*A1	R902	*H2	R1308	*G5	R2113	J8	R2431	*E12	R2911	K10	R3152	L11	R3623	R11	R3910	A12	RB504	R3	RB914	P1	RB2203	*E12	RB3915	G12
E13	E3	IC1005	F2	Q202	C3	R240	*A1	R903	J3	R1401	G6	R2114	H8	R2432	E12	R2912	*B2	R3153	L11	R3625	R12	R3911	A12	RB505	R3	RB915	*G1	RB2204	E12	RB3916	G12
E14	*A2	IC1006	G2	Q203	C3	R241	*B4	R904	*J2	R1402	G6	R2115	J8	R2503	F12	R2913	*B2	R3154	L11	R3626	R12	R3912	A12	RB506	R3	RB916	*H1	RB2205	E12	RB3917	*G12
E15	G4	IC1007	G2	Q204	C3	R242	*B5	R905	J3	R1403	*H6	R2116	*H9	R2504	*F12	R2914	*B2	R3155	L11	R3627	*P12	R3913	A12	RB507	R3	RB917	E1	RB2206	E8	RB3918	*H12
E16	*F3	IC1008	G2	Q205	C4	R243	*B3	R906	*J3	R1404	*H6	R2117	*J9	R2505	*F12	R2915	*B2	R3156	L11	R3628	*P12	R3914	*J1	RB508	R3	RB918	*G1	RB2207	E8	RB3919	*H12
E17	K3	IC1009	G2	Q206	C4	R244	*B7	R907	J2	R1405	*G6	R2118	J8	R2506	*F12	R2916	*B2	R3157	L11	R3629	*R12	R3915	*J1	RB509	R2	RB919	*G1	RB2301	*H8	RB3920	G12
E18	*P2	IC1010	H2	Q207	C3	R245	*B4	R908	*H3	R1406	*H6	R2119	*J8	R2507	E12	R2917	*B2	R3158	L11	R3630	*R12	R3916	*J2	RB510	R2	RB920	F1	RB2302	*H8	RB3921	H12
E19	H12	IC1011	H2	Q208	C3	R246	*B5	R909	H3	R1407	*G5	R2120	*J8	R2508	E12	R2918	*B2	R3159	L11	R3632	*P12	R3917	*J2	RB511	*R3	RB921	F1	RB2303	*F12	RB3922	H12
E20	*F10	IC1102	*C12	Q209	*C4	R247	*B3	R910	*J2	R1408	*G5	R2121	J8	R2509	E12	R2919	*B2	R3160	L11	R3633	*P12	R3918	E4	RB512	*R3	RB1207	*F5	RB2304	F12	RB4201	R12
E21	P12	IC1103	*C11	Q210	*C4	R248	*B7	R1001	D4	R1409	*G5	R2122	J8	R2510	F12	R2920	*B2	R3161	*K11	R3634	R11	R3919	E4	RB513	R3	RB1208	*F5	RB2305	F12	RB4202	R12
E22	R1	IC1104	*D12	Q211	*B4	R249	B6	R1002	D4	R1410	*G5	R2123	J8	R2511	*E12	R3001	*N11	R3162	*K11	R3635	P12	R3920	E4	RB514	R3	RB1209	*F5	RB2306	H8	RB4203	R11
		IC1105	*D11	Q212	*B3	R250	*B3	R1003	D4	R1503	*H4	R2124	J8	R2512	*E12	R3002	*N11	R3163	*K11	R3636	B1	R3921	E4	RB515	R2	RB1301	H4	RB2307	H8	RB4204	R11
F201	B12	IC1106	C12	Q213	*B5	R251	*B3	R1004	D5	R1504	H4	R2125	*J8	R2513	F12	R3003	*N11	R3164	*K11	R3637	B1	R3922	E4	RB516	R2	RB1302	G4	RB2701	G10	RB4205	R12
F202	A3	IC1107	C11	Q214	*B7	R252	*B4	R1005	D5	R1505	*H5	R2126	J8	R2515	F12	R3004	*N11	R3165	*K11	R3638	B1	R3923	E4	RB517	*P3	RB1303	F4	RB2702	H10		
F203	A4	IC1108	D12	Q401	B7	R253	*B4	R1006	D5	R1506	*H5	R2127	J8	R2516	F12	R3005	M11	R3166	*L11	R3639	B1	R4101	*C2	RB518	*P3	RB1304	F4	RB2703	H10	S401	F1
F204	A2	IC1109	D11	Q402	B7	R254	*B2	R1007	D5	R1507	H4	R2128	*J9	R2517	F12	R3006	N11	R3167	*J11	R3640	B1	R4102	*C2	RB519	*P3	RB1701	*F7	RB2704	H10	S402	F1
F205	A6	IC1110	B12	Q403	B7	R255	*B6	R1008	D5	R1508	*H5	R2129	J8	R2518	F12	R3007	M11	R3168	*K11	R3641	B1	R4103	*C2	RB520	*P3	RB1702	*F7	RB2705	H10	S403	L1
F206	A5	IC1111	*B12	Q404	B7	R256	*B5	R1009	D5	R1509	H5	R2130	J8	R2519	E12	R3008	N11	R3169	*L11	R3642	*P11	R4104	D2	RB521	*P3	RB1703	*J7	RB2706	H10	S501	M1
		IC1112	C11	Q801	F6	R257	*B5	R1010	D5	R1510	J4	R2131	J8	R2520	E12	R3009	M10	R3170	*J11	R3643	*R12	R4105	D2	RB522	*P3	RB1704	*H7	RB2901	L10	S901	E1
FB701	*R3	IC1113	*C11	Q1001	D5	R258	*B3	R1011	D5	R1511	H4	R2132	J8	R2521	E12	R3010	M10	R3171	*K11	R3644	*P11	R4106	D2	RB523	*P2	RB1801	F7	RB2902	L10	S902	G1
FB1501	J4	IC1114	*E5	Q1002	D5	R259	*B3	R1012	D5	R1512	J4	R2201	E8	R2522	E12	R3011	M10	R3172	*L11	R3701	K4	R4107	C2	RB524	*P2	RB1802	F7	RB2903	L10	S903	G1
FB1801	*E8	IC1206	J6	Q1201	J6	R260	*B4	R1013	D5	R1513	J4	R2202	E8	R2523	E12	R3012	M11	R3201	*P11	R3702	*K4	R4108	D2	RB525	*P3	RB1803	G7	RB2904	L10	S904	F1
FB1901	*H8	IC1207	*H5	Q3501	R12	R261	*B4	R1101	F4	R1516	*J5	R2203	*F8	R2524	E12	R3013	M11	R3202	*P11	R3703	*K4	R4109	D2	RB526	*P3	RB1804	*G7	RB2905	L10	S1301	H3
FB2401	E12	IC1208	*H5	Q3502	*P12	R262	*B2	R1102	F4	R1517	*H4	R2204	*F8	R2525	*E1	R3014	*M11	R3242	*N12	R3704	L1	R4110	D2	RB527	*P3	RB1805	*G7	RB2906	L10	S2201	E7
FB2402	*E12	IC1501	H4	Q3503	R12	R263	*B2	R1108	*C11	R1518	H4	R2205	E8	R2526	*E1	R3015	*N11	R3243	*N12	R3705	M1	R4111	D2	RB528	*P3	RB1806	*G7	RB3230	P11	S2202	F6
FB2403	*D12	IC1502	J5	Q3504	*P12	R264	*B6	R1109	*D11	R1519	*J5	R2206	E8	R2527	*E1	R3016	*N11	R3301	*P9	R3706	*K4	R4112	D2	RB529	*P3	RB1807	G7	RB3231	*P11	S2301	H7
FB2404	*E12	IC1503	J4	Q3505	P12	R265	*B6	R1110	C11	R1520	*J5	R2207	E8	R2528	*F1	R3017	M11	R3302	*P9	R3707	*K4	R4113	*D2	RB530	*P2	RB1808	*G7	RB3232	*P11	S2302	J7
FB2405	*D12	IC1801	G8	Q3506	P12	R266	*B5	R1111	D11	R1801	*G8	R2208	E8	R2529	*F1	R3018	M11	R3303	*P9	R3708	*K4	R4114	*D2	RB531	*P2	RB1809	*G8	RB3233	*P11		
FB2501	F12	IC1901	K8	Q3601	R11	R267	*B5	R1112	*B12	R1803	*F7	R2209	E8	R2530	*F1	R3019	*N11	R3304	*P9	R3709	M1	R4115	*D2	RB532	*M4	RB1810	*G8	RB3235	N12	SORI01	A9
FB2502	*F12	IC2001	F9	Q3602	R11	R268	*C3	R1113	*C11	R1804	*F7	R2210	E8	R2531	*F12	R3020	M11	R3305	*P9	R3710	*L3	R4116	D2	RB601	*M3	RB1811	*G8	RB3236	N12	SORI02	R9
FB2503	*E12	IC2002	F9	Q3603	R11	R269	*C4	R1114	*E5	R1805	*F7	R2211	*F7	R2532	F12	R3021	M11	R3306	*P9	R3711	M1	R4117	D2	RB602	*M3	RB1812	G8	RB3237	N12		
FB2504	*F12	IC2101	H9	Q3604	R11	R270	*C2	R1201	H5	R1806	*F7	R2212	*F7	R2701	H10	R3022	M11	R3307	*P9	R3712	*K4	R4118	*D2	RB603	*M3	RB1813	*G8	RB3238	N12	T2801	J11
FB2505	*E12	IC2102	J9	Q3605	R11	R271	*C6	R1202	H5	R1807	G7	R2213	*F7	R2702	H10	R3023	M10	R3308	*P9	R3801	D1	R4119	D2	RB604	*M3	RB1814	*G8	RB3239	N12	T3001	M11
FB2801	J10	IC2202	F7	Q3606	R11	R272	*C5	R1203	H5	R1808	*F7	R2214	*F7	R2703	G10	R3024	N11	R3309	*N9	R3802	D1	R4120	D2	RB605	*M4	RB1815	G7	RB3240	N12	T3101	F11
FB2802	*J10	IC2203	*E8	Q3607	R11	R273	*C4	R1204	H5	R1809	G7	R2215	E8	R2704	H10	R3025	M11	R3310	*N9	R3803	D1	R4121	D2	RB606	*M4	RB1816	G8	RB3241	N12	T3102	G11
FB2803	*H10	IC2204	*E7	Q3608	R12	R274	*C4	R1205	H5	R1810	*F7	R2216	E8	R2705	H10	R3026	N11	R3311	*N9	R3804	D1	R4122	*D2	RB607	*M4	RB1817	*G7	RB3242	N12	T3103	H11
FB2804	*H10	IC2205	*E8	Q3609	R12	R301	K8	R1206	H5	R1811	G8	R2217	*E8	R2706	H10	R3027	*B2	R3312	*N9	R3805	D1	R4123	C2	RB608	*N3	RB1901	J7	RB3243	*N12	T3104	K11
FB2805	*H10	IC2206	*E7	Q3610	R11	R302	D3	R1208	H5	R1812	*G8	R2218	*E8	R2707	H10	R3028	*B2	R3313	*N9	R3806	D1	R4124	D2	RB609	*N3	RB1902	J7	RB3244	*N12	T3105	K11
FB3001	N11	IC2302	J7	Q3611	R11	R303	K8	R1209	H5	R1813	*G8	R2219	F7	R2708	F10	R3029	M11	R3314	*N9	R3807	D2	R4125	D2	RB610	*N3	RB1903	J7	RB3245	*N12	T3106	L11
FB3002	*N11	IC2303	*H8	Q3612	R11	R304	K8	R1210	J5	R1816	*G7	R2220	F7	R2709	F10	R3030	*B2	R3315	*N9	R3808	D2	R4126	*D2	RB611	*N3	RB1904	*J7	RB3246	*N12		
FB3003	*N10	IC2304	*G8	Q3613	R12	R305	K8	R1211	J5	R1817	*G7	R2221	F7	R2710	G10	R3031	L11	R3316	*P9	R3809	D2	R4127	D2	RB612	*P3	RB1905	*J7	RB3501	P12	TP219	B12
FB3004	*N10	IC2305	*H9	Q3614	R12	R306	D2	R1212	H5	R1818	G7	R2222	D8	R2711	G10	R3032	M11	R3401	M12	R3810	D2	R4128	D2	RB613	*P3	RB1906	*J7	RB3502	P12	TP223	C3
FB3005	*N10	IC2306	*G9	Q3615	*R12	R307	D2	R1213	H5	R1819	G7	R2223	E8	R2712	*A2	R3033	M11	R3402	M12	R3811	D2	R4129	*D2	RB614	*P3	RB1907	K7	RB3503	P12	TP224	C4
FB4101	C2	IC2401	E12	Q3616	*R12	R308	L8	R1214	H5	R1901	*K8	R2224	D7	R2713	*A2	R3034	M11	R3403	*M12	R3812	D2	R4130	D2	RB615	*P3	RB1908	*J7	RB3504	P12	TP225	C2
FB4102	*C2	IC2402	D11	Q4201	*R12	R309	L8	R1215	H5	R1903	*J7	R2225	D7	R2714	*A2	R3035	M11	R3404	*M12	R3813	E2	R4131	C2	RB616	*N5	RB1909	*J8	RB3505	P12	TP226	C6
FB4103	*D3	IC2403	D11	Q4202	*R12	R310	K8	R1216	*G5	R1904	*J7	R2226	E7	R2715	*A2	R3036	M11	R3405	M12	R3814	E2	R4132	C2	RB617	*N5	RB1910	*J8	RB3506	P12	TP227	C5
FB4104	*C2	IC2404	E12	Q4203	*R12	R311	K8	R1219	G5	R1905	*J7	R2227	E7	R2716	*A2	R3037	M11	R3406	*M12	R3815	E2	R4133	C2	RB618	*N4	RB1911	*J8	RB3507	P12	TP301	K9
FB4105	*D2	IC2405	*E12	Q4204	*R12	R312	D2	R1220	G5	R1906	*J7	R2228	E7	R2717	*A2	R3038	M11	R3407	M12	R3816	E2	R4134	C2	RB619	*N4	RB1912	K8	RB3508	*P12	TP302	E2
FB4202	K7	IC2501	F12	Q4205	*R12	R313	D2	R1221	*G5	R1907	J7	R2301	H8	R2718	*A2	R3039	*M11	R3408	*M12	R3817	E2	R4135	D2	RB620	*N4	RB1913	*J8	RB3509	*P12	TP303	L9
FB4203	*K7	IC2502	E11	Q4206	*R12	R314	L8	R1225	G5	R1908	*J7	R2302	H8	R2719	*A2	R3040	*M11	R3409	M12	R3818	E2	R4136	D2	RB621	*N4	RB1914	*J8	RB3510	*P12	TP304	D4
FB4204	*L7	IC2503	E11	Q4207	*R12	R315	L8	R1226	F5	R1909	J7	R2303	*H8	R2720	*A2	R3041	*M11	R3410	*M12	R3819	E2	R4137	D2	RB622	*N4	RB1915	K7	RB3511	*P12	TP901	P1
FB4205	*L7	IC2504	F12	Q4208	*R12	R316	K9	R1227	F5	R1910	*J7	R2304	*H8	R2801	*J10	R3042	*M11	R3411	M12	R3820	E2	R4138	D2	RB623	*N4	RB1916	K8	RB3512	*P12	TP902	P1
FB4206	*L7	IC2505	*F12	Q4209	*R12	R317	D2	R1228	F5	R1911	J8	R2305	H8	R2802	*J10	R3101	F11	R3412	*M12	R3821	E2	R4139	D1	RB624	*N5	RB1917	*J7	RB3513	*P12	TP903	P1
		IC2701	G10	Q4210	*R12	R318	L9	R1229	E5	R1912	*J8	R2306	H8	R2803	*J10	R3102	F11	R3413	M12	R3822	E2	R4140	C1	RB625	*N5	RB2001	*E8	RB3514	*P12	TP904	P1
IC1	F5	IC2801	J10	Q4211	*R12	R319	D4	R1230	E5	R1913	*K8	R2307	H8	R2804	*J10	R3103	F11	R3414	M12	R3823	E2	R4202	*L7	RB626	*N4	RB2002	*E8	RB3515	*L12	TP1001	D5
IC2	G5	IC2901	K10	Q4212	*R12	R320	D4	R1231	E5	R1916	K7	R2308	H8	R2805	J10	R3104	F11	R3415	*M12	R3824	E2	R4203	*L7	RB627	*N4	RB2003	*E8	RB3516	*B11		
IC3	F8	IC3001	N11	Q4213	*R12	R321	D4	R1232	*G5	R1917	K7	R2309	H8	R2806	J10	R3105	F11	R3416	*N12	R3825	E2	R4204	*L7	RB628	*N4	RB2004	E8	RB3517	L12	X801	E5
IC4	J8	IC3232	N11	Q4214	*R12	R322	D4	R1233	J6	R1918	*K7	R2310	H8	R2807	J10	R3106	G11	R3417	M12	R3826	E2	R4205	L7	RB629	*N4	RB2005	*F8	RB3518	*B11	X1301	G5
IC5	P11	IC3233	N11	Q4215	*R12	R323	D4	R1234	J6	R1919	*K7	R2311	*J7	R2808	J10	R3107	G11	R3418	*M12	R3827	E2	R4206	L7	RB630	*N4	RB2006	*E8	RB3519	*M12	X2201	F7
IC201	*B3	IC3234	*N12	Q4216	*R12	R324	D4	R1235	H5	R2001	F8	R2312	*J7	R2809	H10	R3108	G11	R3419	M12	R3828	E2	R4207	L7	RB631	*N4	RB2007	*E8	RB3520	*L12	X2301	J7
IC202	C3	IC3235	*N12	Q4217	*R12	R325	D4	R1236	J6	R2002	F8	R2313	*J7	R2810	H10	R3109	G11	R3420	*N12	R3829	E2	R4208	K7	RB701	*M5	RB2008	*F8	RB3521	*L12	X2401	D12
IC203	C4	IC3301	*P9	Q4218	*R12	R328	C8	R1237	H5	R2003	F8	R2314	*J7	R2811	H10	R3110	G11	R3421	M12	R3830	E2	R4209	L7	RB702	*M5	RB2009	*F8	RB3522	*L12	X2501	E12
IC204	*C4	IC3302	*N9	Q4219	*R12	R329	*A1	R1238	*J6	R2004	F8	R2315	H8	R2812	J10	R3111	G11	R3422	*M12	R3831	*E10	R4210	L7	RB703	*M4	RB2010	*F8	RB3523	M12	X2701	G10
IC301	K8	IC3401	M12	Q4220	*R12	R401	B7	R1239	*J6	R2005	E8	R2316	H8	R2813	H10	R3112	G11	R3423	M12	R3832	*E10	R4211	L7	RB704	*M4	RB2011	*F8	RB3524	L12	X2801	J10
IC302	E2	IC3402	*M12			R402	B7	R1240	*J6	R2006	F8	R2317	*H8	R2814	*H10	R3113	G11	R3424	*M12	R3833	*D10	R4212	L7	RB705	*M3	RB2012	*F8	RB3525	L12	X2901	K10
IC303	L8	IC3403	M12	R201	*C4	R403	B7	R1241	*J6	R2007	F8	R2318	*H8	R2815	*J10	R3114	G11	R3503	R12	R3834	*E10	R4213	L7	RB706	*M3	RB2013	*G8	RB3526	L12	X3001	M11
IC304	D4	IC3404	*M12	R202	*C4	R404	B7	R1242	E5	R2008	E8	R2319	J7	R2816	*J10	R3115	G11	R3504	*P12	R3835	R11	R4214	*L7	RB707	*M3	RB2014	G8	RB3601	P12	X3201	*P11
IC305	*R11	IC3409	*P11	R203	*C4	R405	B7	R1243	E5	R2009	*F8	R2320	J7	R2817	H10	R3116	G11	R3505	P12	R3836	R11	R4215	*L7	RB708	*M2	RB2015	G8	RB3602	R12	X3901	E4
IC306	C7	IC3410	*P11	R204	C3	R406	B7	R1244	J5	R2010	E8	R2321	J7	R2818	J10	R3117	H11	R3506	*P12	R3837	*D10	R4216	*L7	RB709	*P5	RB2016	G8	RB3603	R12	X4101	D2
IC401	B7	IC3502	L12	R205	C3	R407	*B8	R1245	J5	R2011	*E9	R2322	G9	R2819	*H10	R3118	H11	R3507	P12	R3838	*D10	R4217	L7	RB710	*P5	RB2017	*F8	RB3604	R12	X4202	L7
IC402	B7	IC3503	*B11	R206	C3	R408	*B8	R1246	F5	R2012	F8	R2323	G9	R2820	J10	R3119	H11	R3508	P12	R3839	P11	R4218	L7	RB711	*P4	RB2018	F8	RB3605	R12		
IC410	A8	IC3504	M12	R207	C3	R409	*A8	R1247	F5	R2013	F8	R2324	G8	R2821	J10	R3120	H11	R3509	R12	R3840	*G8	R4219	*L7	RB712	*P4	RB2019	*F8	RB3606	R12		
IC411	A8	IC3505	L12	R208	*B1	R412	F1	R1248	F5	R2014	F8	R2325	G8	R2822	J10	R3121	H11	R3510	*P12	R3841	G8	R4220	L7	RB713	*P4	RB2020	*F8	RB3607	*R11		
IC412	B8	IC3506	L12	R209	*B1	R413	F1	R1249	F5	R2015	F8	R2326	G8	R2823	H10	R3122	H11	R3511	P12	R3842	*G8	R4221	L7	RB714	*P4	RB2021	*G8	RB3608	*R12		
IC413	B8	IC3507	L12	R210	C3	R414	F1	R1250	F5	R2016	*F9	R2327	G8	R2824	J10	R3123	H11	R3512	*P12	R3843	*G8	R4222	L7	RB715	*P4	RB2022	*G8	RB3609	N11		
IC501	M4	IC3601	B1	R211	C3	R415	L1	R1251	F5	R2017	*F9	R2328	H7	R2825	J10	R3124	H11	R3513	P12	R3844	H5	R4223	*L7	RB716	*P4	RB2023	*F8	RB3610	B1		

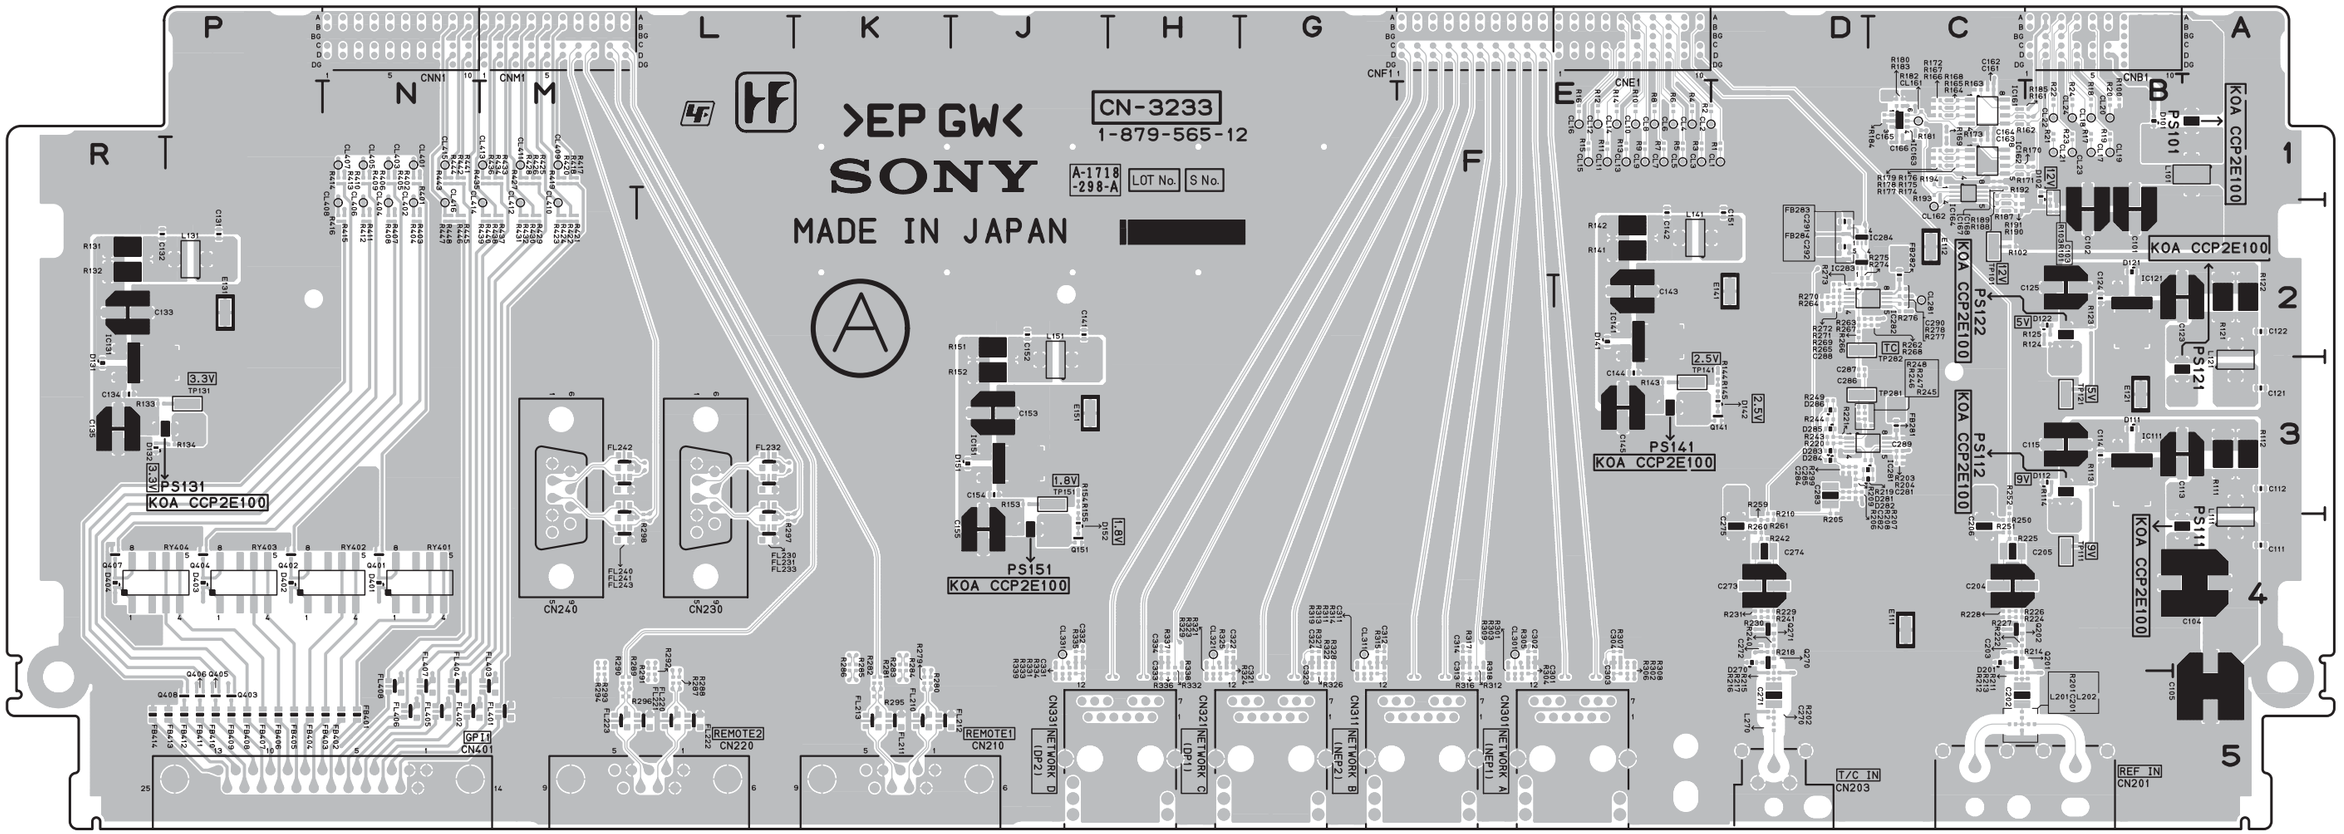

CN-3233/3233A -A SIDE-
SUFFIX: -12

CN-3233/3233A (1-879-565-12)
---
*:B SIDE

C101	B2	C144	E3	C272	D4	C314	F4	CL14	E1	CL406	N2			D283	D3
C102	B2	C145	E3	C273	D4	C321	H5	CL15	E1	CL407	N1	CNB1	B1	D284	D3
C103	B2	C151	D2	C274	D4	C322	H4	CL16	E1	CL408	N2	CNE1	E1	D285	D3
C104	A4	C152	J2	C275	D4	C323	G5	CL17	B1	CL409	M1	CNF1	F1	D286	D3
C105	A5	C153	J3	C281	C3	C324	G4	CL18	B1	CL410	M2	CNM1	M1	D401	N4
C111	A4	C154	J3	C282	D3	C331	J5	CL19	B1	CL411	M1	CNN1	N1	D402	P4
C112	A3	C155	J4	C283	D3	C332	J4	CL20	B1	CL412	M2			D403	P4
C113	B3	C161	C1	C284	D3	C333	H5	CL21	B1	CL413	M1	D101	B1	D404	R4
C114	B3	C162	C1	C285	D3	C334	H4	CL22	B1	CL414	M2	D102	B1		
C115	B3	C163	C1	C286	D3			CL23	B1	CL415	N1	D111	B3	E111	C4
C121	A3	C164	C1	C287	D3	CL1	D1	CL24	B1	CL416	N2	D112	B3	E112	C2
C122	A2	C165	C1	C288	D2	CL2	E1	CL161	C1			D121	B2	E121	B3
C123	B2	C166	C1	C289	C3	CL3	E1	CL162	C2	CN201	C5	D122	B2	E131	P2
C124	B2	C167	C1	C290	C2	CL4	E1	CL281	C2	CN203	D5	D131	R3	E141	D2
C125	B2	C168	C1	C291	D2	CL5	E1	CL301	F4	CN210	K5	D132	R3	E151	J3
C131	P2	C201	C5	C292	D2	CL6	E1	CL311	G4	CN220	L5	D141	E2		
C132	R2	C202	C5	C301	F5	CL7	E1	CL321	H4	CN230	L3	D142	D3	FB281	C3
C133	R2	C203	C4	C302	F4	CL8	E1	CL331	J4	CN240	M3	D151	J3	FB282	C2
C134	R3	C204	C4	C303	E5	CL9	E1	CL401	N1	CN301	F5	D152	J4	FB283	D2
C135	R3	C205	C4	C304	E4	CL10	E1	CL402	N2	CN311	G5	D201	C4	FB284	D2
C141	J2	C206	C4	C311	G5	CL11	E1	CL403	N1	CN321	H5	D270	D4	FB401	N5
C142	E2	C270	D5	C312	G4	CL12	E1	CL404	N2	CN331	J5	D281	D3	FB402	N5
C143	E2	C271	D5	C313	F5	CL13	E1	CL405	N1	CN401	P5	D282	D3	FB403	N5

FB404	P5	FL233	L4	IC281	D3					R8	E1	R113	B3	R163	C1	R187	C2
FB405	P5	FL240	M3	IC282	D2	Q141	D3			R9	E1	R114	B3	R164	C1	R188	C2
FB406	P5	FL241	M3	IC283	D2	Q151	J4			R10	E1	R121	A2	R165	C1	R189	C1
FB407	P5	FL242	M3	IC284	D2	Q201	C4			R11	E1	R122	A2	R166	C1	R190	C2
FB408	P5	FL243	M4			Q202	C4			R12	E1	R123	B2	R167	C1	R191	C2
FB409	P5	FL401	M5	L101	A1	Q270	D4			R13	E1	R124	B2	R168	C1	R192	C1
FB410	P5	FL402	N5	L111	A4	Q271	D4			R14	E1	R125	B2	R169	C1	R193	C1
FB411	P5	FL403	M5	L121	A3	Q401	N4			R15	E1	R131	R2	R170	C1	R194	C1
FB412	P5	FL404	N5	L131	P2	Q402	P4			R16	E1	R132	R2	R171	C1	R201	C5
FB413	P5	FL405	N5	L141	E2	Q403	P5			R17	B1	R133	R3	R172	C1	R202	D5
FB414	R5	FL406	N5	L151	J3	Q404	P4			R18	B1	R134	P3	R173	C1	R203	C3
		FL407	N5	L201	C5	Q405	P5			R19	B1	R141	E2	R174	C1	R204	C3
FL210	K5	FL408	N5	L202	B5	Q406	P5			R20	B1	R142	E2	R175	C1	R205	D4
FL211	K5			L270	D5	Q407	R4			R21	B1	R143	E3	R176	C1	R206	D3
FL212	K5	IC111	B3			Q408	P5			R22	B1	R144	D3	R177	C1	R207	D3
FL213	K5	IC121	B2	PS101	A1					R23	B1	R145	D3	R178	C1	R208	D3
FL220	L5	IC131	R3	PS111	B4	R1	D1			R24	B1	R151	J2	R179	C1	R209	D3
FL221	L5	IC141	E2	PS112	B3	R2	E1			R100	B1	R152	J3	R180	C1	R210	D4
FL222	L5	IC151	J3	PS121	B3	R3	E1			R101	B2	R153	J3	R181	C1	R211	B5
FL223	M5	IC161	C1	PS122	B2	R4	E1			R102	C2	R154	J3	R182	C1	R212	C5
FL230	L3	IC162	C1	PS131	P3	R5	E1			R103	B1	R155	J3	R183	C1	R213	C5
FL231	L3	IC163	C1	PS141	E3	R6	E1			R111	A3	R161	C1	R184	C1	R214	C4
FL232	L3	IC164	C1	PS151	J4	R7	E1			R112	A3	R162	C1	R185	C1	R215	D5

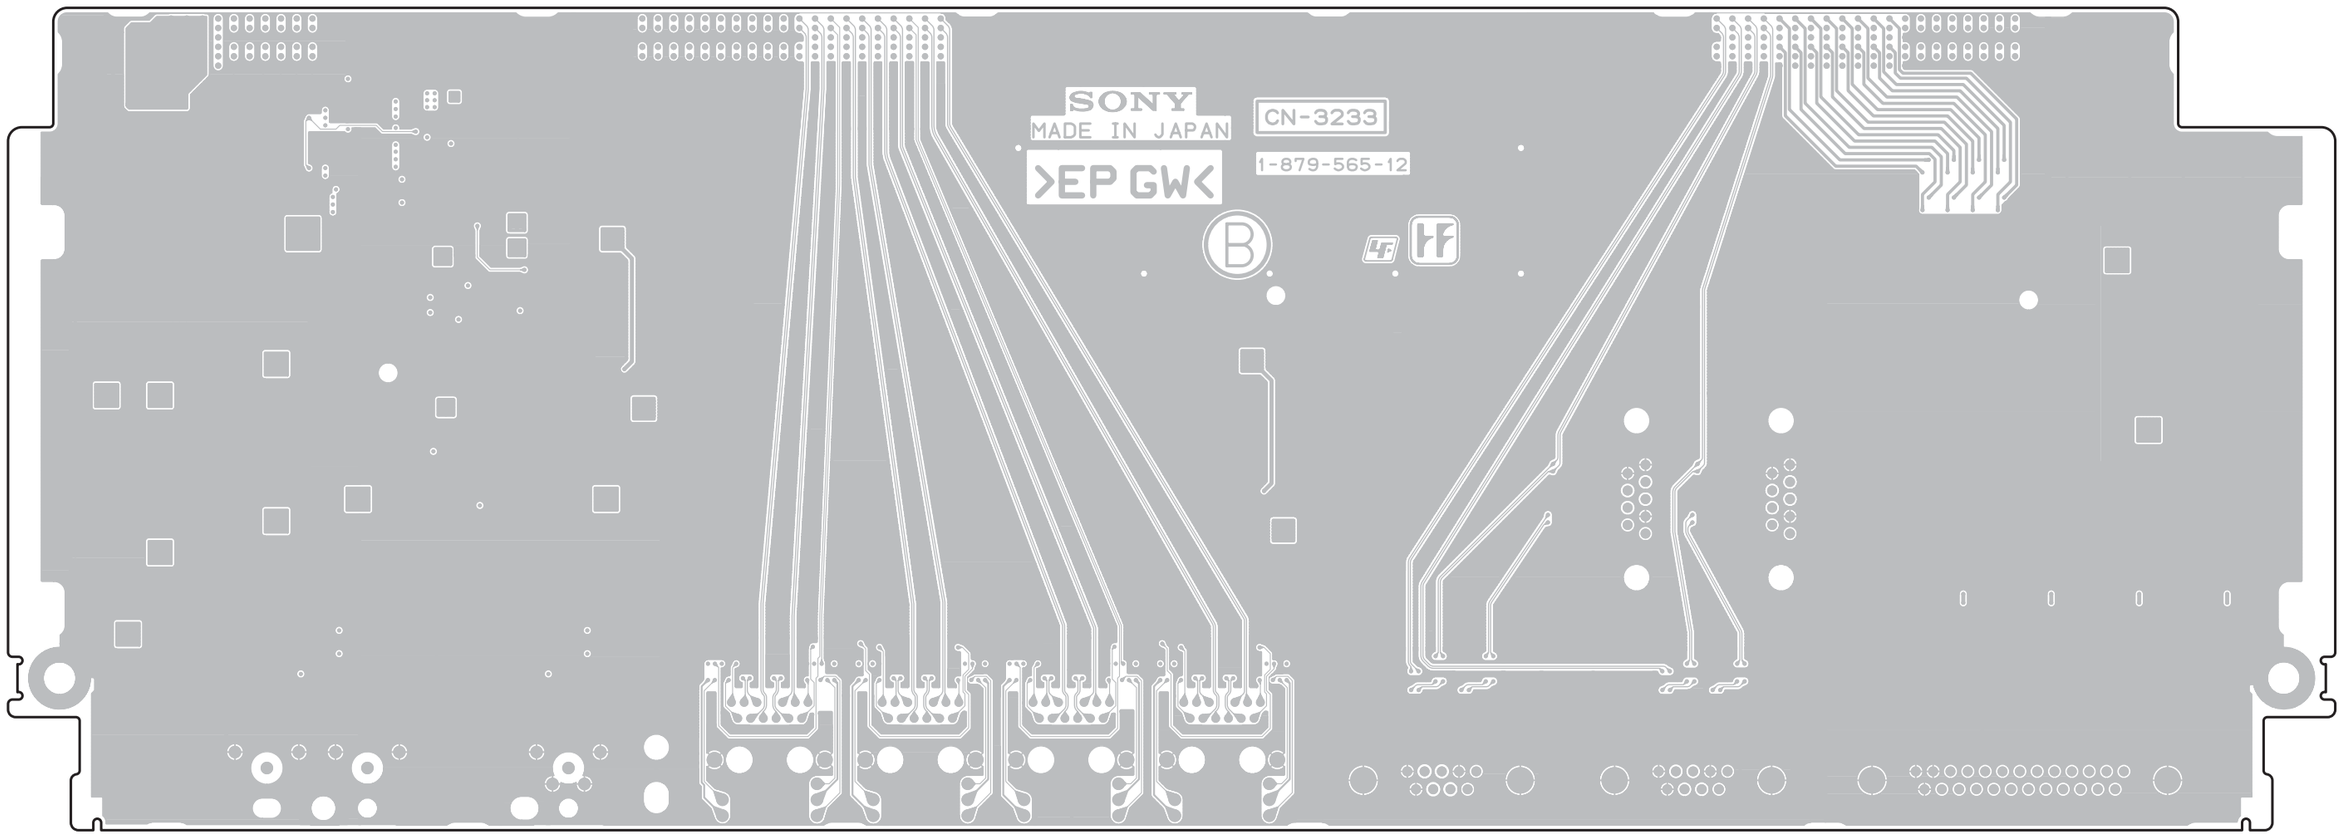

CN-3233/3233A -B SIDE-
SUFFIX: -12

R216	D5	R248	D3	R277	C2	R301	F5	R326	G5	R411	N2	R434	M1	TP121	B3
R217	D5	R249	D3	R278	C2	R302	E5	R327	G4	R412	N2	R435	M1	TP131	P3
R218	D4	R250	C4	R279	K5	R303	F5	R328	G5	R413	N1	R436	M1	TP141	E3
R219	D3	R251	C4	R280	K5	R304	F5	R329	H5	R414	N1	R437	M2	TP151	J3
R220	D3	R252	C3	R281	K5	R305	F4	R331	J5	R415	N2	R438	M2	TP281	D3
R221	D3	R259	D4	R282	K5	R306	E5	R332	H5	R416	N2	R439	M2	TP282	D2
R222	C4	R260	D4	R283	K4	R307	E4	R333	J5	R417	M1	R440	M2		
R224	C4	R261	D4	R284	K4	R308	E5	R334	J5	R418	M1	R441	N1		
R225	C4	R262	C2	R285	K4	R309	F5	R335	J4	R419	M1	R442	N1		
R226	C4	R263	D2	R286	K4	R311	G5	R336	H5	R420	M1	R443	N1		
R227	C4	R264	D2	R287	L5	R312	F5	R337	H4	R421	M2	R444	N1		
R228	C4	R265	D2	R288	L5	R313	G5	R338	H5	R422	M2	R445	N2		
R229	D4	R266	D2	R289	M5	R314	G5	R339	J5	R423	M2	R446	N2		
R230	D4	R267	D2	R290	M5	R315	G4	R401	N1	R424	M2	R447	N2		
R231	D4	R268	C2	R291	L5	R316	F5	R402	N1	R425	M1	R448	N2		
R240	D4	R269	D2	R292	L5	R317	F4	R403	N2	R426	M1				
R241	D4	R270	D2	R293	M5	R318	F5	R404	N2	R427	M1	RY401	N4		
R242	D4	R271	D2	R294	M5	R319	G5	R405	N1	R428	M1	RY402	N4		
R243	D3	R272	D2	R295	K5	R321	H5	R406	N1	R429	M2	RY403	P4		
R244	D3	R273	D2	R296	M5	R322	G5	R407	N2	R430	M2	RY404	R4		
R245	D3	R274	D2	R297	L4	R323	H5	R408	N2	R431	M2				
R246	D3	R275	D2	R298	L4	R324	H5	R409	N1	R432	M2	TP101	C2		
R247	D3	R276	C2	R299	D3	R325	H4	R410	N1	R433	M1	TP111	B4		

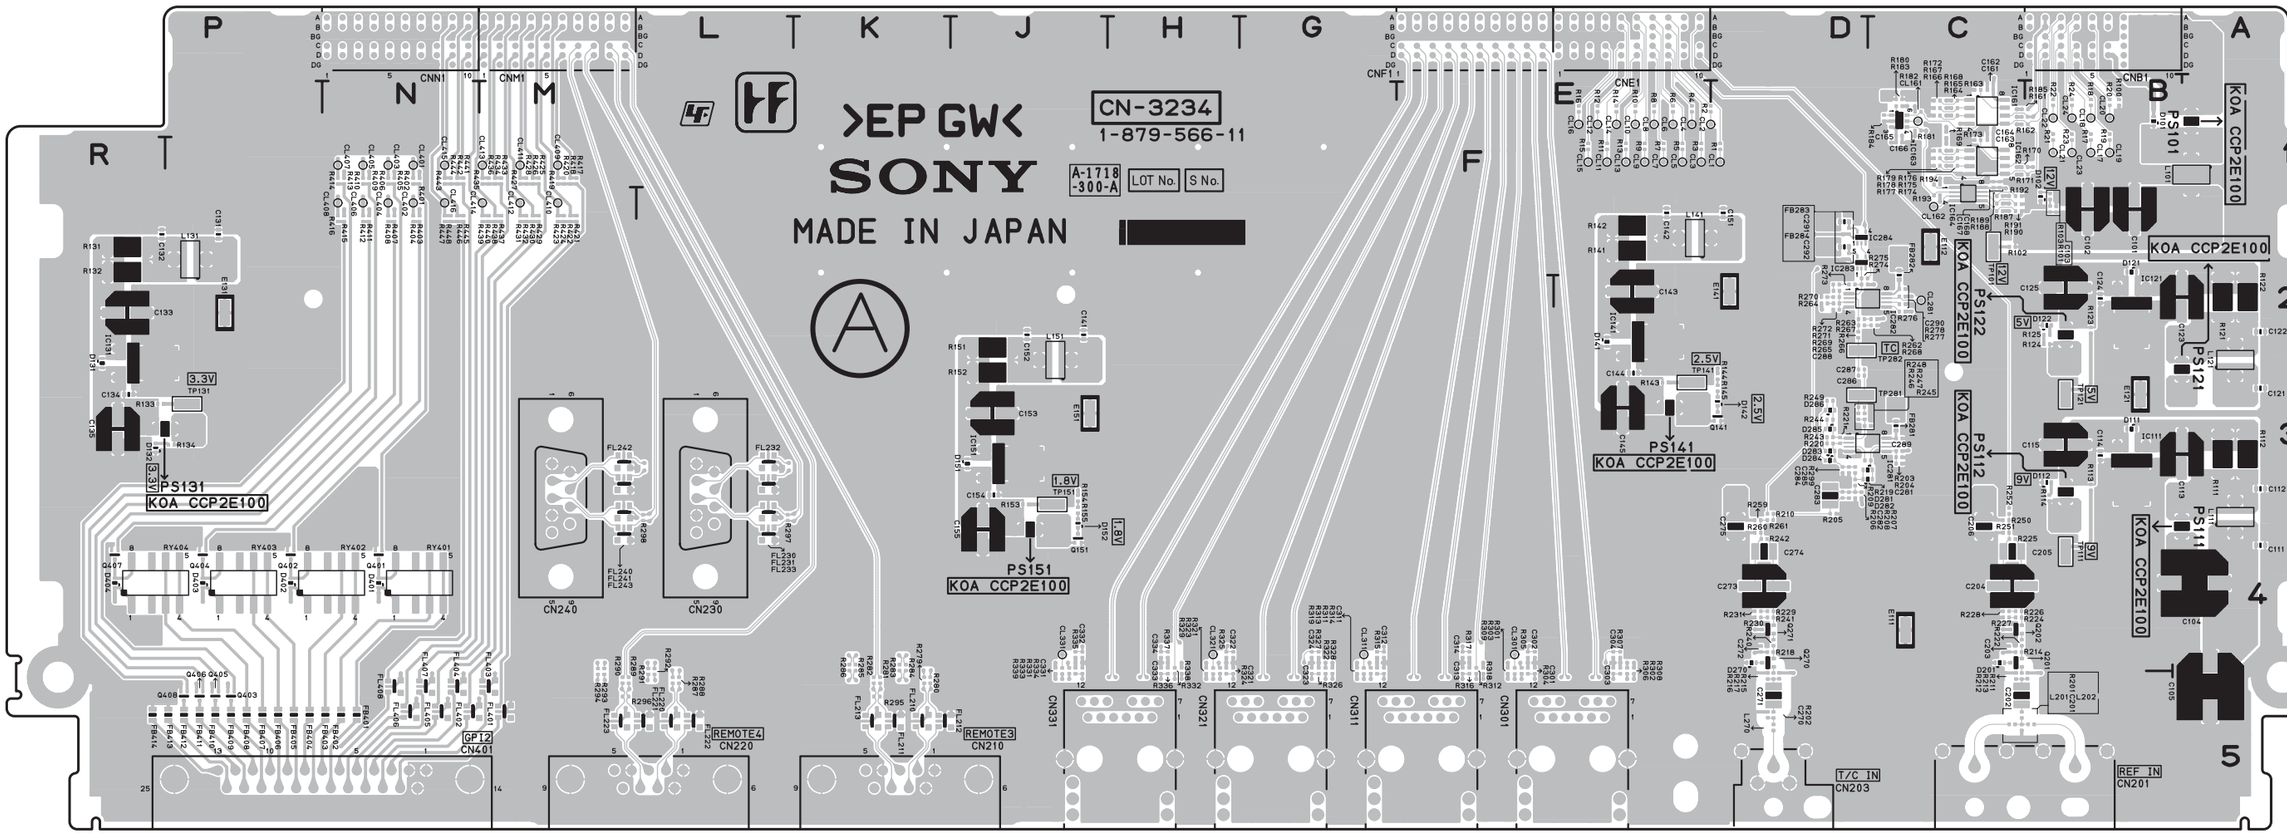

CN-3234 -A SIDE-
SUFFIX: -11

CN-3234 (1-879-566-11)
---
*:B SIDE

C101	B2	C144	E3	C272	D4	C314	F4	CL14	E1	CL406	N2			D283	D3
C102	B2	C145	E3	C273	D4	C321	H5	CL15	E1	CL407	N1	CNB1	B1	D284	D3
C103	B2	C151	D2	C274	D4	C322	H4	CL16	E1	CL408	N2	CNE1	E1	D285	D3
C104	A4	C152	J2	C275	D4	C323	G5	CL17	B1	CL409	M1	CNF1	F1	D286	D3
C105	A5	C153	J3	C281	C3	C324	G4	CL18	B1	CL410	M2	CNM1	M1	D401	N4
C111	A4	C154	J3	C282	D3	C331	J5	CL19	B1	CL411	M1	CNN1	N1	D402	P4
C112	A3	C155	J4	C283	D3	C332	J4	CL20	B1	CL412	M2			D403	P4
C113	B3	C161	C1	C284	D3	C333	H5	CL21	B1	CL413	M1	D101	B1	D404	R4
C114	B3	C162	C1	C285	D3	C334	H4	CL22	B1	CL414	M2	D102	B1		
C115	B3	C163	C1	C286	D3			CL23	B1	CL415	N1	D111	B3	E111	C4
C121	A3	C164	C1	C287	D3	CL1	D1	CL24	B1	CL416	N2	D112	B3	E112	C2
C122	A2	C165	C1	C288	D2	CL2	E1	CL161	C1			D121	B2	E121	B3
C123	B2	C166	C1	C289	C3	CL3	E1	CL162	C2	CN201	C5	D122	B2	E131	P2
C124	B2	C167	C1	C290	C2	CL4	E1	CL281	C2	CN203	D5	D131	R3	E141	D2
C125	B2	C168	C1	C291	D2	CL5	E1	CL301	F4	CN210	K5	D132	R3	E151	J3
C131	P2	C201	C5	C292	D2	CL6	E1	CL311	G4	CN220	L5	D141	E2		
C132	R2	C202	C5	C301	F5	CL7	E1	CL321	H4	CN230	L3	D142	D3	FB281	C3
C133	R2	C203	C4	C302	F4	CL8	E1	CL331	J4	CN240	M3	D151	J3	FB282	C2
C134	R3	C204	C4	C303	E5	CL9	E1	CL401	N1	CN301	F5	D152	J4	FB283	D2
C135	R3	C205	C4	C304	E4	CL10	E1	CL402	N2	CN311	G5	D201	C4	FB284	D2
C141	J2	C206	C4	C311	G5	CL11	E1	CL403	N1	CN321	H5	D270	D4	FB401	N5
C142	E2	C270	D5	C312	G4	CL12	E1	CL404	N2	CN331	J5	D281	D3	FB402	N5
C143	E2	C271	D5	C313	F5	CL13	E1	CL405	N1	CN401	P5	D282	D3	FB403	N5

FB404	P5	FL233	L4	IC281	D3			R8	E1	R113	B3	R163	C1	R187	C2
FB405	P5	FL240	M3	IC282	D2	Q141	D3	R9	E1	R114	B3	R164	C1	R188	C2
FB406	P5	FL241	M3	IC283	D2	Q151	J4	R10	E1	R121	A2	R165	C1	R189	C1
FB407	P5	FL242	M3	IC284	D2	Q201	C4	R11	E1	R122	A2	R166	C1	R190	C2
FB408	P5	FL243	M4			Q202	C4	R12	E1	R123	B2	R167	C1	R191	C2
FB409	P5	FL401	M5	L101	A1	Q270	D4	R13	E1	R124	B2	R168	C1	R192	C1
FB410	P5	FL402	N5	L111	A4	Q271	D4	R14	E1	R125	B2	R169	C1	R193	C1
FB411	P5	FL403	M5	L121	A3	Q401	N4	R15	E1	R131	R2	R170	C1	R194	C1
FB412	P5	FL404	N5	L131	P2	Q402	P4	R16	E1	R132	R2	R171	C1	R201	C5
FB413	P5	FL405	N5	L141	E2	Q403	P5	R17	B1	R133	R3	R172	C1	R202	D5
FB414	R5	FL406	N5	L151	J3	Q404	P4	R18	B1	R134	P3	R173	C1	R203	C3
		FL407	N5	L201	C5	Q405	P5	R19	B1	R141	E2	R174	C1	R204	C3
FL210	K5	FL408	N5	L202	B5	Q406	P5	R20	B1	R142	E2	R175	C1	R205	D4
FL211	K5			L270	D5	Q407	R4	R21	B1	R143	E3	R176	C1	R206	D3
FL212	K5	IC111	B3			Q408	P5	R22	B1	R144	D3	R177	C1	R207	D3
FL213	K5	IC121	B2	PS101	A1			R23	B1	R145	D3	R178	C1	R208	D3
FL220	L5	IC131	R3	PS111	B4	R1	D1	R24	B1	R151	J2	R179	C1	R209	D3
FL221	L5	IC141	E2	PS112	B3	R2	E1	R100	B1	R152	J3	R180	C1	R210	D4
FL222	L5	IC151	J3	PS121	B3	R3	E1	R101	B2	R153	J3	R181	C1	R211	B5
FL223	M5	IC161	C1	PS122	B2	R4	E1	R102	C2	R154	J3	R182	C1	R212	C5
FL230	L3	IC162	C1	PS131	P3	R5	E1	R103	B1	R155	J3	R183	C1	R213	C5
FL231	L3	IC163	C1	PS141	E3	R6	E1	R111	A3	R161	C1	R184	C1	R214	C4
FL232	L3	IC164	C1	PS151	J4	R7	E1	R112	A3	R162	C1	R185	C1	R215	D5

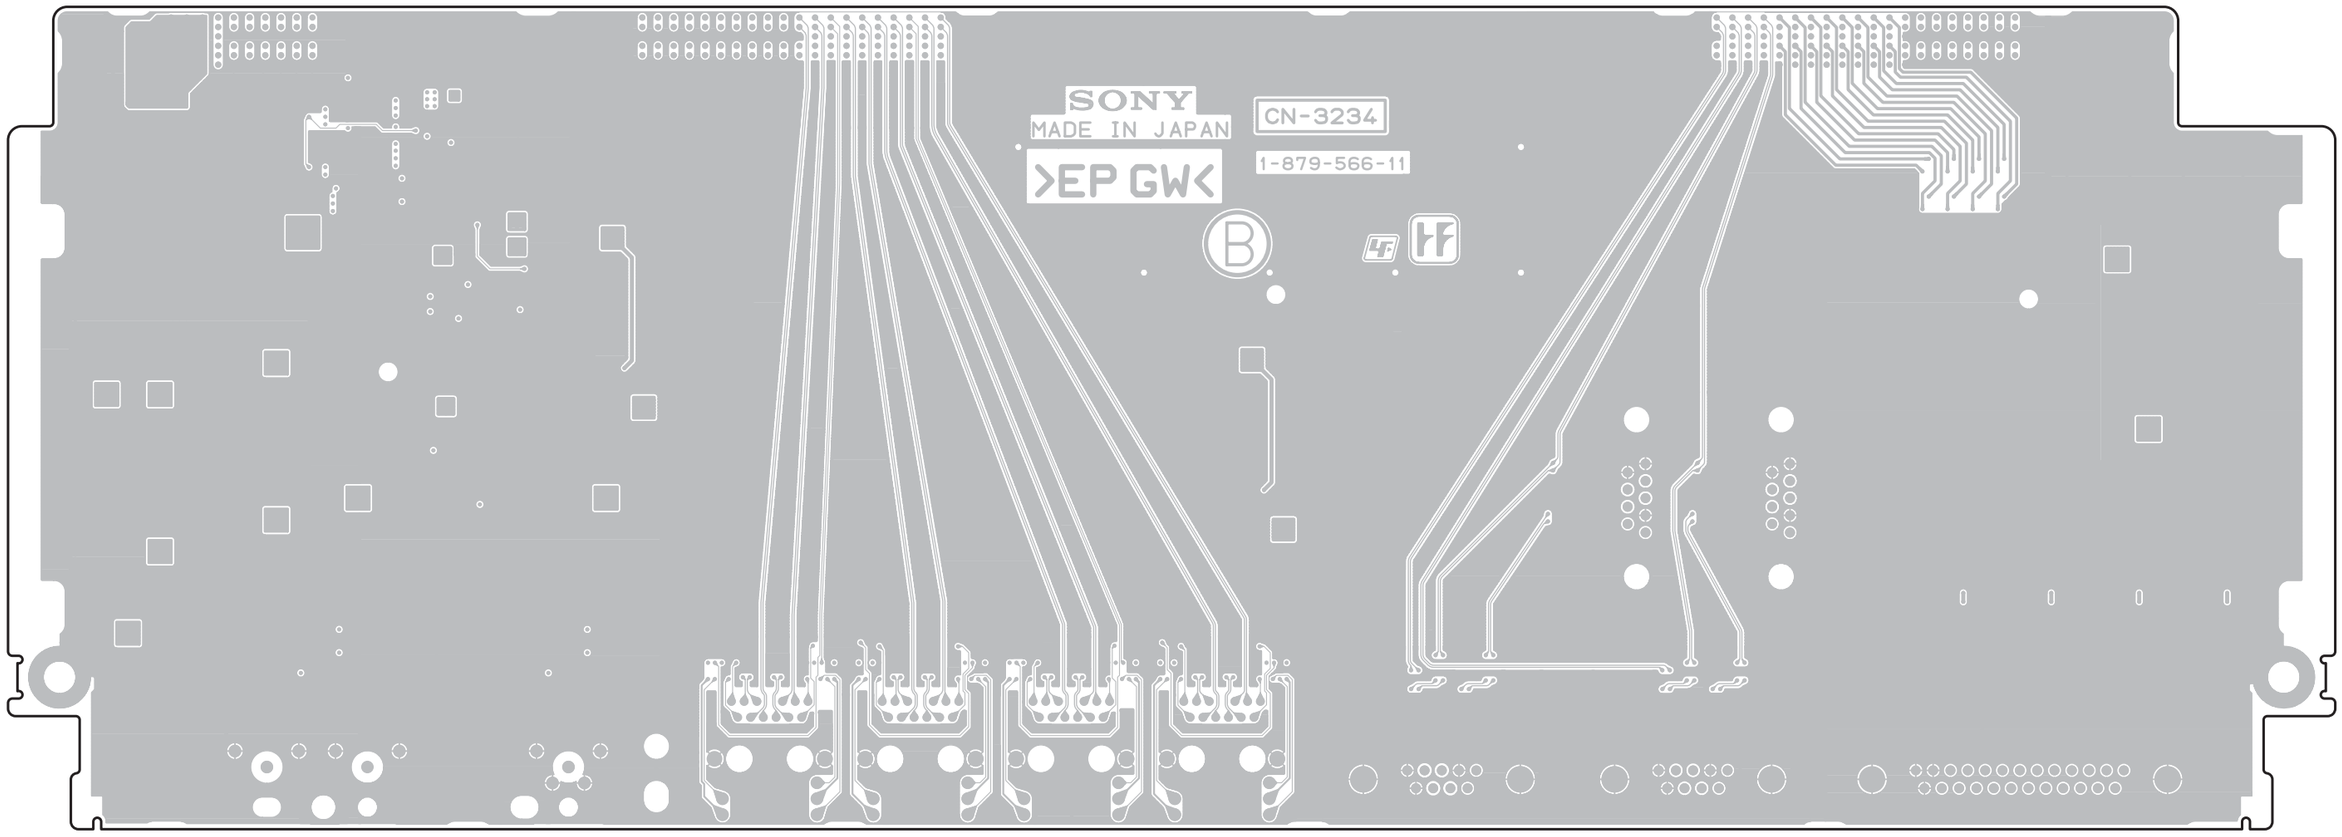

CN-3234 -B SIDE-
SUFFIX: -11

R216	D5	R248	D3	R277	C2	R301	F5	R326	G5	R411	N2	R434	M1	TP121	B3
R217	D5	R249	D3	R278	C2	R302	E5	R327	G4	R412	N2	R435	M1	TP131	P3
R218	D4	R250	C4	R279	K5	R303	F5	R328	G5	R413	N1	R436	M1	TP141	E3
R219	D3	R251	C4	R280	K5	R304	F5	R329	H5	R414	N1	R437	M2	TP151	J3
R220	D3	R252	C3	R281	K5	R305	F4	R331	J5	R415	N2	R438	M2	TP281	D3
R221	D3	R259	D4	R282	K5	R306	E5	R332	H5	R416	N2	R439	M2	TP282	D2
R222	C4	R260	D4	R283	K4	R307	E4	R333	J5	R417	M1	R440	M2		
R224	C4	R261	D4	R284	K4	R308	E5	R334	J5	R418	M1	R441	N1		
R225	C4	R262	C2	R285	K4	R309	F5	R335	J4	R419	M1	R442	N1		
R226	C4	R263	D2	R286	K4	R311	G5	R336	H5	R420	M1	R443	N1		
R227	C4	R264	D2	R287	L5	R312	F5	R337	H4	R421	M2	R444	N1		
R228	C4	R265	D2	R288	L5	R313	G5	R338	H5	R422	M2	R445	N2		
R229	D4	R266	D2	R289	M5	R314	G5	R339	J5	R423	M2	R446	N2		
R230	D4	R267	D2	R290	M5	R315	G4	R401	N1	R424	M2	R447	N2		
R231	D4	R268	C2	R291	L5	R316	F5	R402	N1	R425	M1	R448	N2		
R240	D4	R269	D2	R292	L5	R317	F4	R403	N2	R426	M1				
R241	D4	R270	D2	R293	M5	R318	F5	R404	N2	R427	M1	RY401	N4		
R242	D4	R271	D2	R294	M5	R319	G5	R405	N1	R428	M1	RY402	N4		
R243	D3	R272	D2	R295	K5	R321	H5	R406	N1	R429	M2	RY403	P4		
R244	D3	R273	D2	R296	M5	R322	G5	R407	N2	R430	M2	RY404	R4		
R245	D3	R274	D2	R297	L4	R323	H5	R408	N2	R431	M2				
R246	D3	R275	D2	R298	L4	R324	H5	R409	N1	R432	M2	TP101	C2		
R247	D3	R276	C2	R299	D3	R325	H4	R410	N1	R433	M1	TP111	B4		

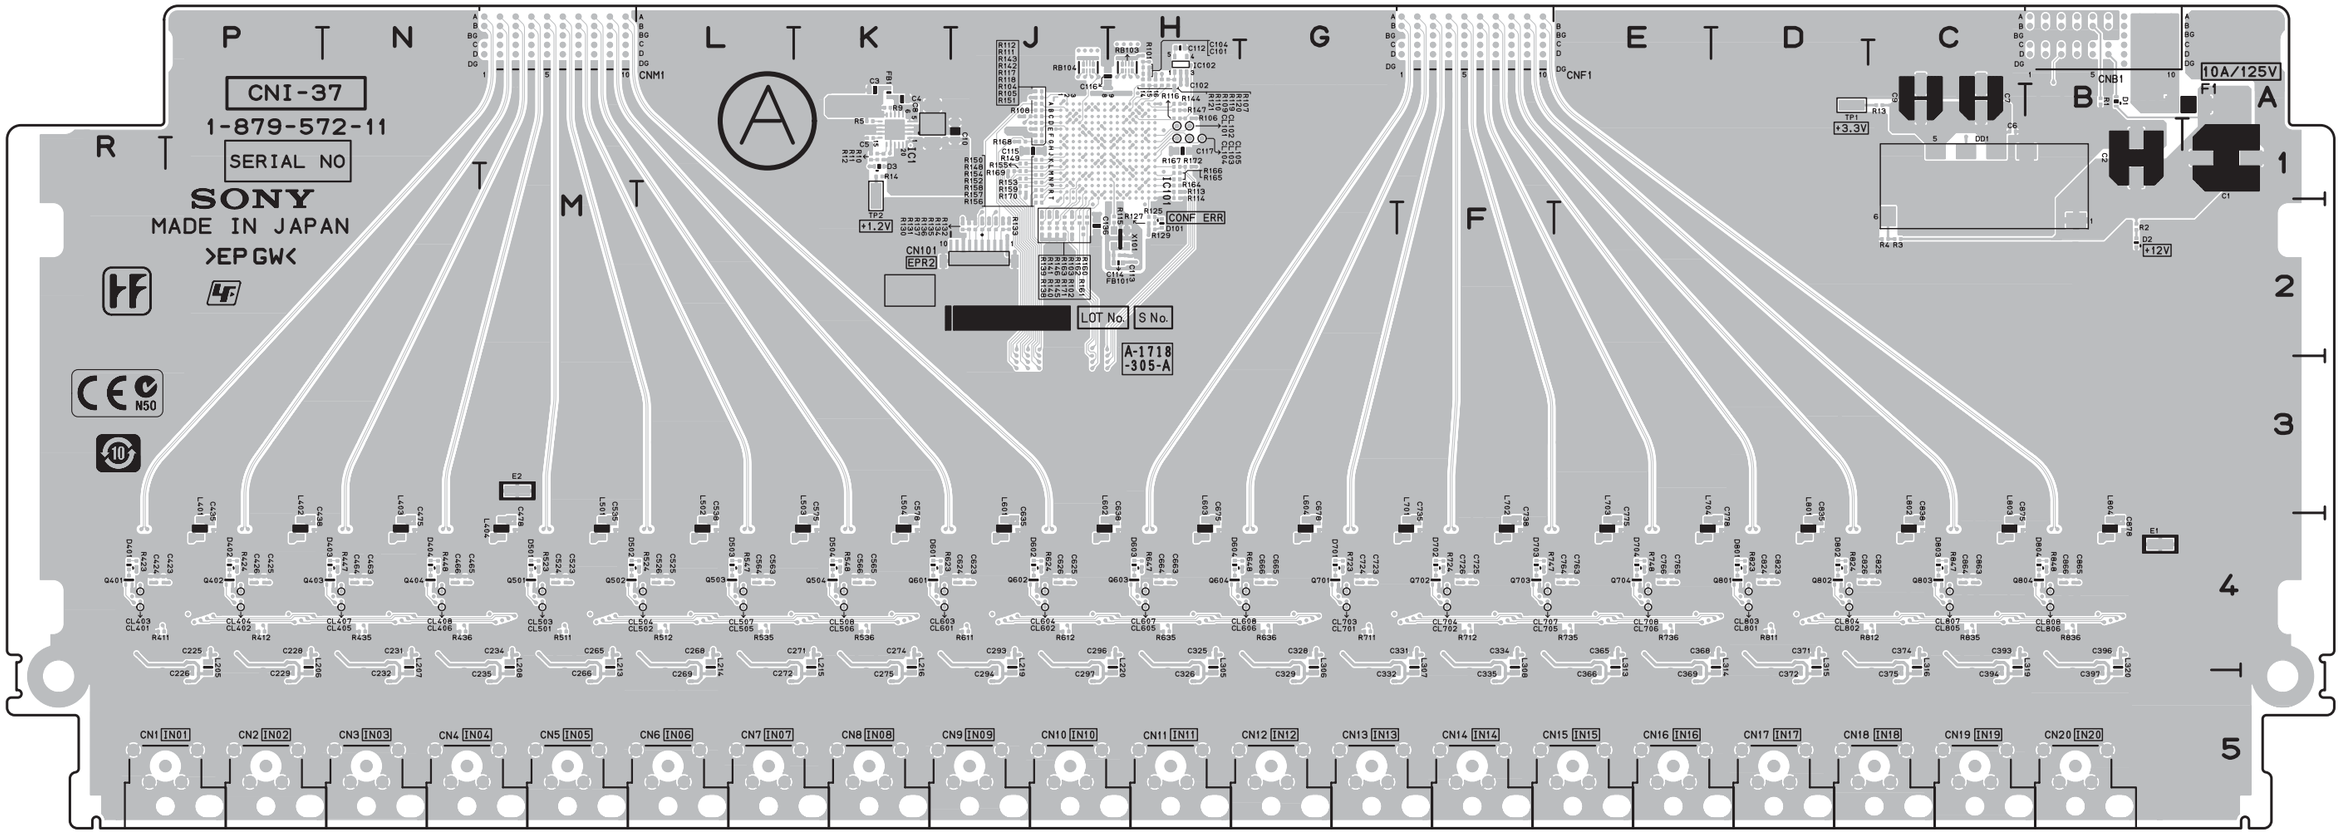

CNI-37/37A -A SIDE-

SUFFIX: -11

CNI-37/37A (1-879-572-11)

---

*:B SIDE

C1	A1	C137	*H1	C243	*L5	C288	*K5	C333	*G5	C378	*E4	C423	R4	C468	*N4	C533	*L4	C578	K4	C643	*H4	C708	*G4	C753	*E4	C818	*D4	C863	C4	CL402	P4
C2	B1	C138	*J1	C244	*K5	C289	*K5	C334	F4	C379	*D4	C424	R4	C469	*N4	C534	*L4	C579	*K4	C644	*G4	C709	*G4	C754	*E4	C819	*D4	C864	C4	CL403	R4
C3	K1	C139	*H1	C245	*M5	C290	*J4	C335	F5	C380	*C4	C425	P4	C470	*N4	C535	M4	C580	*K4	C645	*H4	C710	*G4	C755	*F4	C820	*C4	C865	B4	CL404	P4
C4	K1	C201	*R5	C246	*M5	C291	*J5	C336	*F5	C381	*C5	C426	P4	C471	*N4	C536	*M4	C601	*J4	C646	*G4	C711	*F4	C756	*E4	C821	*D4	C866	B4	CL405	N4
C5	K1	C202	*P5	C247	*L5	C292	*J5	C337	*H4	C382	*B5	C427	*P4	C472	*N4	C537	*M4	C602	*J4	C647	*H4	C712	*F4	C757	*F4	C822	*C4	C867	*C4	CL406	N4
C6	C1	C203	*N5	C248	*L5	C293	J4	C338	*G4	C383	*C5	C428	*P4	C473	*N4	C538	L4	C603	*J4	C648	*H4	C713	*G4	C758	*E4	C823	D4	C868	*C4	CL407	N4
C7	C1	C204	*N5	C249	*L5	C294	J5	C339	*G4	C384	*C5	C429	*R4	C474	*N4	C539	*L4	C604	*J4	C649	*H4	C714	*F4	C759	*E4	C824	D4	C869	*C4	CL408	N4
C8	K1	C205	*R5	C250	*L5	C295	*J5	C340	*F4	C385	*B5	C430	*R4	C475	N4	C540	*L4	C605	*J4	C650	*G4	C715	*G4	C760	*E4	C825	C4	C870	*C4	CL501	M4
C9	C1	C206	*R5	C251	*K5	C296	H4	C341	*E5	C386	*B5	C431	*P4	C476	*N4	C541	*L4	C606	*J4	C651	*G4	C716	*F4	C761	*E4	C826	D4	C871	*B4	CL502	L4
C10	J1	C207	*P5	C252	*K5	C297	J5	C342	*E5	C387	*C4	C432	*P4	C477	*N4	C542	*K4	C607	*K4	C652	*G4	C717	*G4	C762	*E4	C827	*D4	C872	*B4	CL503	M4
C101	H1	C208	*P5	C253	*M4	C298	*J5	C343	*D5	C388	*C5	C433	*P4	C478	M4	C543	*L4	C608	*K4	C653	*H4	C718	*F4	C763	E4	C828	*D4	C873	*B4	CL504	L4
C102	H1	C209	*N5	C254	*M5	C299	*J4	C344	*D5	C389	*C5	C434	*P4	C479	*M4	C544	*K4	C609	*K4	C654	*G4	C719	*F4	C764	E4	C829	*D4	C874	*B4	CL505	L4
C103	*H1	C210	*N5	C255	*M5	C300	*J4	C345	*E5	C390	*B4	C435	P4	C480	*M4	C545	*L4	C610	*J4	C655	*H4	C720	*F4	C765	E4	C830	*D4	C875	C4	CL506	K4
C104	H1	C211	*N5	C256	*L4	C301	*H5	C346	*E5	C391	*B5	C436	*P4	C501	*M4	C546	*K4	C611	*J4	C656	*G4	C721	*G4	C766	E4	C831	*C4	C876	*C4	CL507	L4
C105	*H1	C212	*N5	C257	*L5	C302	*G5	C347	*E5	C392	*B5	C437	*P4	C502	*L4	C547	*L4	C612	*J4	C657	*H4	C722	*F4	C767	*E4	C832	*C4	C877	*C4	CL508	K4
C106	*H1	C213	*R4	C258	*L5	C303	*G5	C348	*E5	C393	C4	C438	P4	C503	*M4	C548	*L4	C613	*J4	C658	*G4	C723	G4	C768	*E4	C833	*D4	C878	B4	CL601	K4
C107	*H1	C214	*R5	C259	*L4	C304	*F5	C349	*D5	C394	C5	C439	*P4	C504	*L4	C549	*L4	C614	*J4	C659	*H4	C724	G4	C769	*E4	C834	*D4	C879	*B4	CL602	J4
C108	*J1	C215	*R5	C260	*L5	C305	*H5	C350	*D5	C395	*C5	C440	*P4	C505	*M4	C550	*K4	C615	*K4	C660	*G4	C725	F4	C770	*F4	C835	D4	C880	*B4	CL603	K4
C109	*J1	C216	*P4	C261	*L5	C306	*H5	C351	*C5	C396	B4	C441	*N4	C506	*L4	C551	*K4	C616	*J4	C661	*H4	C726	F4	C771	*E4	C836	*D4			CL604	J4
C110	*J1	C217	*P5	C262	*K4	C307	*G5	C352	*C5	C397	B5	C442	*M4	C507	*M4	C552	*K4	C617	*K4	C662	*G4	C727	*G4	C772	*E4	C837	D4	CL101	H1	CL605	H4
C111	*J1	C218	*P5	C263	*K5	C308	*G5	C353	*F4	C398	*B5	C443	*N4	C508	*M4	C553	*L4	C618	*J4	C663	H4	C728	*G4	C773	*E4	C838	C4	CL102	H1	CL606	G4
C112	H1	C219	*N4	C264	*K5	C309	*G5	C354	*F5	C399	*C4	C444	*M4	C509	*M4	C554	*K4	C619	*J4	C664	H4	C729	*G4	C774	*E4	C839	*C4	CL103	H1	CL607	H4
C113	H2	C220	*N5	C265	M4	C310	*G5	C355	*F5	C400	*B4	C445	*N4	C510	*L4	C555	*L4	C620	*J4	C665	G4	C730	*G4	C775	E4	C840	*C4	CL104	H1	CL608	G4
C114	H2	C221	*N5	C266	M5	C311	*F5	C356	*E4	C401	*P4	C446	*M4	C511	*L4	C556	*K4	C621	*J4	C666	G4	C731	*F4	C776	*E4	C841	*C4	CL105	H1	CL701	G4
C115	J1	C222	*N4	C267	*M5	C312	*F5	C357	*E5	C402	*P4	C447	*N4	C512	*L4	C557	*L4	C622	*J4	C667	*H4	C732	*F4	C777	*E4	C842	*B4	CL201	*P5	CL702	F4
C116	J1	C223	*N5	C268	L4	C313	*H4	C358	*E5	C403	*P4	C448	*N4	C513	*M4	C558	*K4	C623	J4	C668	*H4	C733	*F4	C778	D4	C843	*C4	CL202	*P5	CL703	G4
C117	H1	C224	*N5	C269	L5	C314	*H5	C359	*D4	C404	*P4	C449	*N4	C514	*L4	C559	*K4	C624	J4	C669	*H4	C734	*F4	C779	*E4	C844	*B4	CL203	*N5	CL704	F4
C118	*J1	C225	P4	C270	*L5	C315	*H5	C360	*D5	C405	*P4	C450	*N4	C515	*M4	C560	*K4	C625	J4	C670	*H4	C735	F4	C780	*E4	C845	*C4	CL204	*M5	CL705	F4
C119	*J1	C226	P5	C271	K4	C316	*G4	C361	*D5	C406	*P4	C451	*N4	C516	*L4	C561	*L4	C626	J4	C671	*G4	C736	*F4	C801	*D4	C846	*B4	CL205	*M5	CL706	E4
C120	*H1	C227	*P5	C272	K5	C317	*G5	C362	*D4	C407	*R4	C452	*N4	C517	*M4	C562	*K4	C627	*J4	C672	*G4	C737	*F4	C802	*C4	C847	*C4	CL206	*L5	CL707	F4
C121	*H1	C228	P4	C273	*L5	C318	*G5	C363	*D5	C408	*R4	C453	*N4	C518	*L4	C563	L4	C628	*J4	C673	*G4	C738	F4	C803	*D4	C848	*C4	CL207	*L5	CL708	E4
C122	*H1	C229	P5	C274	K4	C319	*G4	C364	*D5	C409	*R4	C454	*M4	C519	*M4	C564	L4	C629	*J4	C674	*G4	C739	*F4	C804	*C4	C849	*C4	CL208	*K5	CL801	D4
C123	*H1	C230	*P5	C275	K5	C320	*G5	C365	E4	C410	*P4	C455	*N4	C520	*L4	C565	K4	C630	*K4	C675	H4	C740	*F4	C805	*D4	C850	*B4	CL209	*J5	CL802	D4
C124	*J2	C231	N4	C276	*K5	C321	*G5	C366	E5	C411	*P4	C456	*N4	C521	*M4	C566	K4	C631	*J4	C676	*H4	C741	*F4	C806	*C4	C851	*B4	CL210	*J5	CL803	P4
C125	*J1	C232	N5	C277	*M4	C322	*F4	C367	*E5	C412	*P4	C457	*N4	C522	*L4	C567	*L4	C632	*J4	C677	*H4	C742	*E4	C807	*D4	C852	*B4	CL301	*H5	CL804	D4
C126	*H1	C233	*N5	C278	*L4	C323	*F5	C368	D4	C413	*P4	C458	*N4	C523	M4	C568	*L4	C633	*J4	C678	G4	C743	*E4	C808	*D4	C853	*C4	CL302	*G5	CL805	C4
C127	*J1	C234	M4	C279	*L4	C324	*F5	C369	E5	C414	*P4	C459	*N4	C524	M4	C569	*L4	C634	*J4	C679	*G4	C744	*E4	C809	*D4	C854	*B4	CL303	*G5	CL806	B4
C128	*H1	C235	M5	C280	*K4	C325	H4	C370	*E5	C415	*R4	C460	*M4	C525	L4	C570	*L4	C635	J4	C680	*G4	C745	*E4	C810	*D4	C855	*C4	CL304	*F5	CL807	C4
C129	*J1	C236	*M5	C281	*J5	C326	H5	C371	D4	C416	*P4	C461	*N4	C526	L4	C571	*K4	C636	*J4	C701	*G4	C746	*E4	C811	*D4	C856	*B4	CL305	*E5	CL808	B4
C130	*J1	C237	*P4	C282	*J5	C327	*H5	C372	D5	C417	*R4	C462	*M4	C527	*M4	C572	*K4	C637	*J4	C702	*F4	C747	*F4	C812	*D4	C857	*C4	CL306	*E5		
C131	*H1	C238	*P4	C283	*J5	C328	G4	C373	*D5	C418	*P4	C463	N4	C528	*M4	C573	K4	C638	H4	C703	*G4	C748	*F4	C813	*D4	C858	*B4	CL307	*D5	CN1	R5
C132	*J1	C239	*N4	C284	*J5	C329	G5	C374	C4	C419	*P4	C464	N4	C529	*M4	C574	*K4	C639	*J4	C704	*F4	C749	*F4	C814	*C4	C859	*C4	CL308	*C5	CN2	P5
C133	*H1	C240	*M4	C285	*J4	C330	*G5	C375	C5	C420	*P4	C465	N4	C530	*M4	C575	K4	C640	*J4	C705	*G4	C750	*E4	C815	*D4	C860	*B4	CL309	*C5	CN3	N5
C134	*J1	C241	*M5	C286	*J5	C331	F4	C376	*C5	C421	*P4	C466	N4	C531	*L4	C576	*K4	C641	*H4	C706	*F4	C751	*E4	C816	*D4	C861	*C4	CL310	*B5	CN4	N5
C135	*H1	C242	*L5	C287	*K4	C332	F5	C377	*E4	C422	*P4	C467	*N4	C532	*L4	C577	*K4	C642	*G4	C707	*G4	C752	*E4	C817	*D4	C862	*B4	CL401	R4	CN5	M5
C136	J2																														

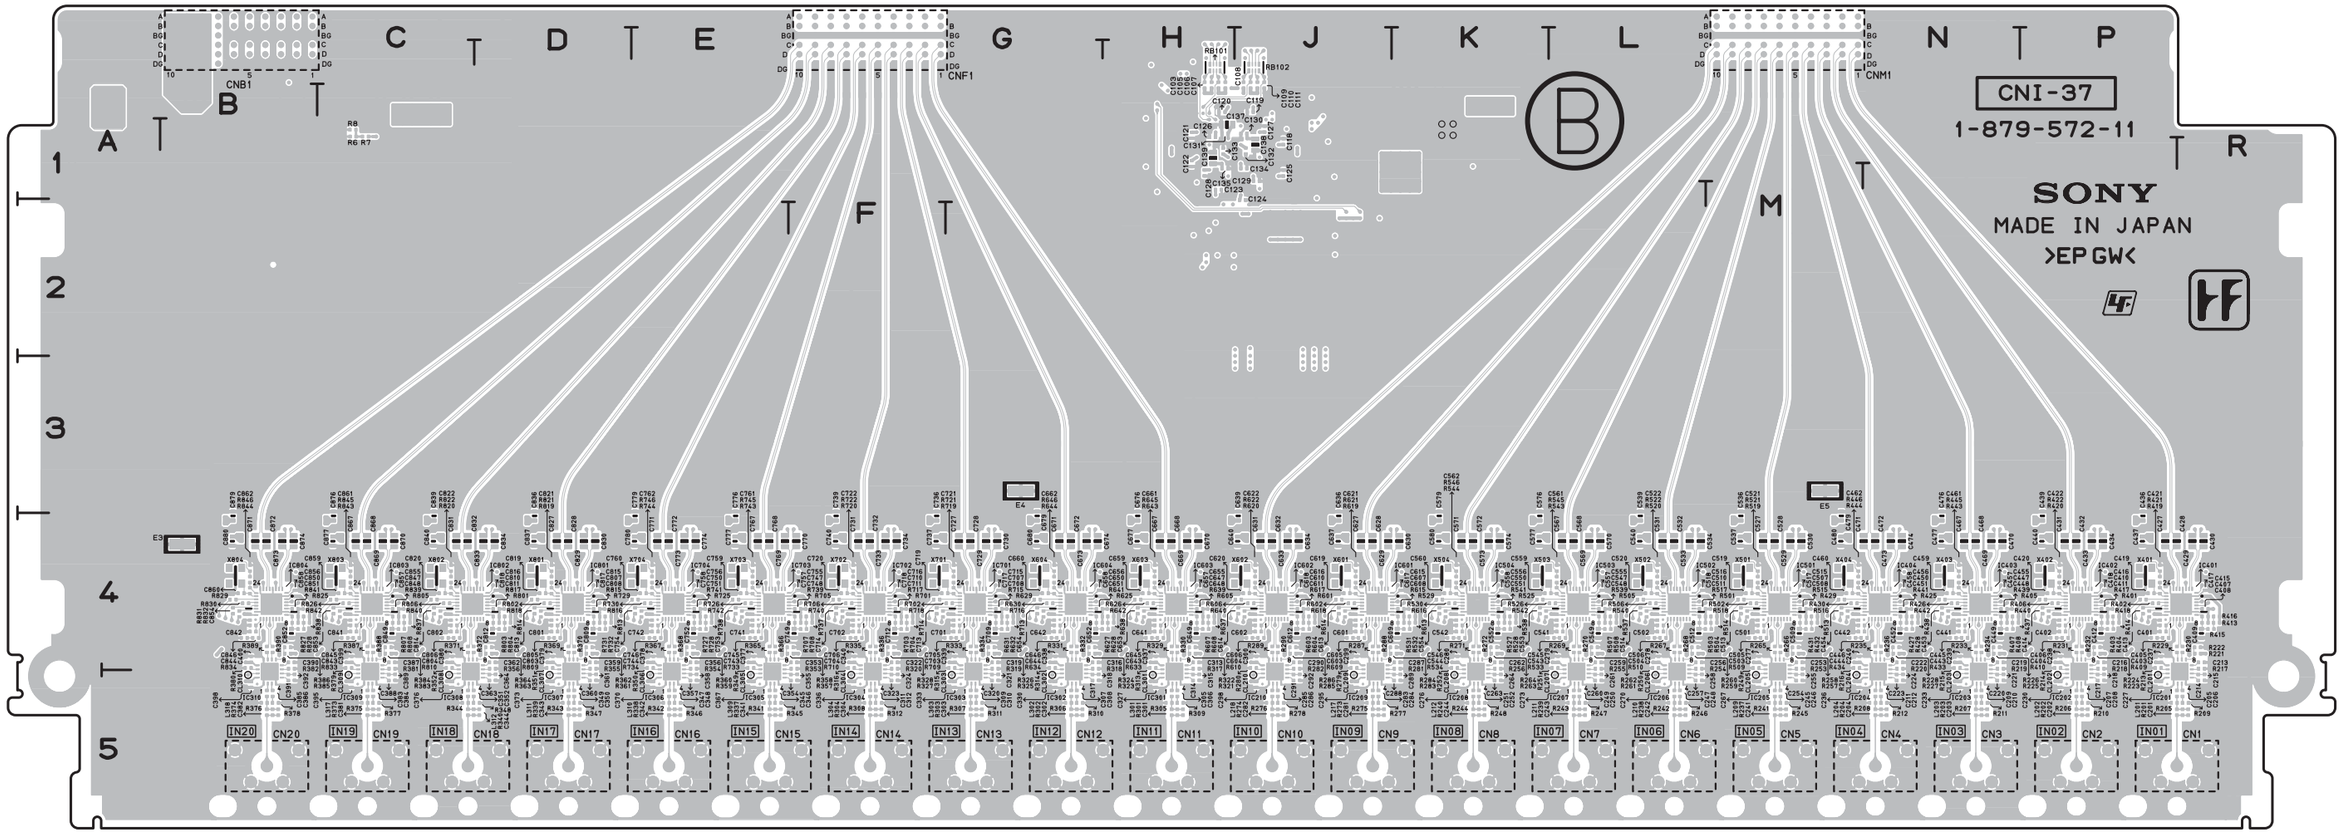

CNI-37/37A -B SIDE-

SUFFIX: -11

CN6	M5			IC601	*J4	L313	E4	Q801	D4	R132	J2	R205	*P5	R250	*L4	R305	*H5	R350	*E4	R405	*P4	R502	*M4	R547	L4	R644	*G4	R741	*E4	R838	*B4
CN7	L5	DD1	C1	IC602	*J4	L314	D4	Q802	D4	R133	J2	R206	*P5	R251	*L4	R306	*G5	R351	*D4	R406	*P4	R503	*M4	R548	K4	R645	*H4	R742	*E4	R839	*C4
CN8	K5			IC603	*H4	L315	D4	Q803	C4	R134	J2	R207	*N5	R252	*K4	R307	*G5	R352	*C4	R407	*P4	R504	*M4	R601	*J4	R646	*G4	R743	*E4	R840	*C4
CN9	K5	E1	B4	IC604	*G4	L316	C4	Q804	B4	R135	J2	R208	*N5	R253	*M4	R308	*F5	R353	*F4	R408	*P4	R505	*L4	R602	*J4	R647	H4	R744	*E4	R841	*B4
CN10	J5	E2	M3	IC701	*G4	L317	*C5			R136	J2	R209	*R5	R254	*L4	R309	*H5	R354	*E4	R409	*P4	R506	*L4	R603	*J4	R648	G4	R745	*E4	R842	*B4
CN11	H5	E3	*B4	IC702	*F4	L318	*B5	R1	B1	R137	J2	R210	*P5	R255	*L4	R310	*G5	R355	*D4	R410	*P4	R507	*L4	R604	*J4	R701	*F4	R746	*E4	R843	*C4
CN12	H5	E4	*G3	IC703	*E4	L319	C4	R2	B2	R138	J2	R211	*N5	R256	*K4	R311	*G5	R356	*D4	R411	P4	R508	*L4	R605	*J4	R702	*G4	R747	F4	R844	*B4
CN13	G5	E5	*M3	IC704	*E4	L320	B4	R3	C2	R139	J2	R212	*N5	R257	*M4	R312	*F5	R357	*F4	R412	P4	R509	*M4	R606	*J4	R703	*F4	R748	E4	R845	*C4
CN14	F5			IC801	*D4	L401	P4	R4	C2	R140	J2	R213	*P4	R258	*M4	R313	*H4	R358	*F4	R413	*R4	R510	*L4	R607	*J4	R704	*F4	R801	*D4	R846	*B4
CN15	F5	F1	A1	IC802	*C4	L402	P4	R5	K1	R141	J2	R214	*P4	R259	*L4	R314	*G4	R359	*E4	R414	*P4	R511	M4	R608	*J4	R705	*F4	R802	*D4	R847	C4
CN16	E5			IC803	*C4	L403	N4	R6	*C1	R142	J1	R215	*N4	R260	*L4	R315	*G4	R360	*E4	R415	*R4	R512	L4	R609	*J4	R706	*F4	R803	*D4	R848	B4		
CN17	D5	FB1	K1	IC804	*B4	L404	M4	R7	*C1	R143	J1	R216	*M4	R261	*L4	R316	*F4	R361	*D4	R416	*R4	R513	*M4	R610	*J4	R707	*F4	R804	*D4		
CN18	D5	FB101	H2			L501	M4	R8	*C1	R144	H1	R217	*R4	R262	*L4	R317	*H4	R362	*D4	R417	*P4	R514	*M4	R611	J4	R708	*F4	R805	*C4	RB101	*H1
CN19	H5			L201	*R5	L502	L4	R9	K1	R145	J2	R218	*P4	R263	*K4	R318	*G4	R363	*D4	R418	*P4	R515	*M4	R612	J4	R709	*G4	R806	*C4	RB102	*J1
CN20	B5	IC1	K1	L202	*P5	L503	K4	R10	K1	R146	J2	R219	*N4	R264	*K4	R319	*G4	R364	*D4	R419	*P4	R516	*M4	R613	*K4	R710	*F4	R807	*C4	RB103	H1
CN101	J2	IC101	J1	L203	*N5	L504	K4	R11	K1	R147	H1	R220	*N4	R265	*M4	R320	*F4	R365	*E4	R420	*P4	R517	*M4	R614	*J4	R711	G4	R808	*C4	RB104	J1
		IC102	H1	L204	*N5	L601	J4	R12	K1	R148	J1	R221	*R4	R266	*M4	R321	*H4	R366	*E4	R421	*P4	R518	*M4	R615	*K4	R712	F4	R809	*D4		
CNB1	B1	IC201	*R5	L205	P4	L602	J4	R13	C1	R149	J1	R222	*R4	R267	*L4	R322	*H4	R367	*E4	R422	*P4	R519	*M4	R616	*K4	R713	*G4	R810	*C4	TP1	D1
CNF1	F1	IC202	*P5	L206	P4	L603	H4	R14	K1	R150	J1	R223	*P4	R268	*L4	R323	*G4	R368	*E4	R423	R4	R520	*L4	R617	*J4	R714	*F4	R811	D4	TP2	K1
CNM1	M1	IC203	*N5	L207	N4	L604	G4	R101	H1	R151	J1	R224	*P4	R269	*L4	R324	*G4	R369	*D4	R424	P4	R521	*M4	R618	*J4	R715	*G4	R812	C4		
		IC204	*N5	L208	M4	L701	F4	R102	J2	R152	J1	R225	*N4	R270	*L4	R325	*G4	R370	*D4	R425	*N4	R522	*L4	R619	*J4	R716	*G4	R813	*D4	X101	H2
D1	B1	IC205	*M5	L209	*M5	L702	F4	R103	J2	R153	J1	R226	*N4	R271	*K4	R326	*G4	R371	*C4	R426	*N4	R523	M4	R620	*J4	R717	*F4	R814	*D4	X401	*P4
D2	B2	IC206	*L5	L210	*L5	L703	E4	R104	J1	R154	J1	R227	*N4	R272	*K4	R327	*F4	R372	*C4	R427	*N4	R524	L4	R621	*J4	R718	*F4	R815	*D4	X402	*P4
D3	K1	IC207	*L5	L211	*L5	L704	E4	R105	J1	R155	J1	R228	*N4	R273	*J5	R328	*F4	R373	*C5	R428	*N4	R525	*K4	R622	*J4	R719	*G4	R816	*D4	X403	*N4
D101	H2	IC208	*K5	L212	*K5	L801	D4	R106	H1	R156	J2	R229	*R4	R274	*J5	R329	*H4	R374	*B5	R429	*M4	R526	*L4	R623	K4	R720	*F4	R817	*D4	X404	*M4
D401	R4	IC209	*J5	L213	M4	L802	C4	R107	H1	R157	J1	R230	*R4	R275	*J5	R330	*H4	R375	*C5	R430	*M4	R527	*K4	R624	J4	R721	*G4	R818	*D4	X501	*M4
D402	P4	IC210	*J5	L214	L4	L803	C4	R108	J1	R158	J1	R231	*P4	R276	*J5	R331	*G4	R376	*B5	R431	*M4	R528	*K4	R625	*H4	R722	*F4	R819	*D4	X502	*P4
D403	N4	IC301	*H5	L215	K4	L804	B4	R109	H1	R159	J1	R232	*P4	R277	*J5	R332	*G4	R377	*C5	R432	*M4	R529	*K4	R626	*H4	R723	G4	R820	*C4	X503	*K4
D404	N4	IC302	*G5	L216	K4			R110	H1	R160	J2	R233	*N4	R278	*J5	R333	*G4	R378	*B5	R433	*N4	R530	*K4	R627	*H4	R724	F4	R821	*D4	X504	*K4
D501	M4	IC303	*G5	L217	*J5	Q401	R4	R111	J1	R161	J2	R234	*N4	R279	*J4	R334	*G4	R379	*C4	R434	*N4	R531	*K4	R628	*H4	R725	*E4	R822	*C4	X601	*J4
D502	M4	IC304	*F5	L218	*J5	Q402	P4	R112	J1	R162	J2	R235	*N4	R280	*J4	R335	*F4	R380	*B4	R435	N4	R532	*K4	R629	*G4	R726	*E4	R823	D4	X602	*J4
D503	L4	IC305	*E5	L219	J4	Q403	N4	R113	H1	R163	J2	R236	*N4	R281	*K4	R336	*F4	R381	*C4	R436	N4	R533	*L4	R630	*G4	R727	*E4	R824	D4	X603	*H4
D504	K4	IC306	*E5	L220	H4	Q404	N4	R114	H1	R164	H1	R237	*M5	R282	*J4	R337	*E5	R382	*B4	R437	*N4	R534	*K4	R631	*G4	R728	*E4	R825	*C4	X604	*G4
D601	K4	IC307	*D5	L301	*H5	Q501	M4	R115	H2	R165	H1	R238	*L5	R283	*K4	R338	*E5	R383	*C4	R438	*N4	R535	L4	R632	*G4	R729	*E4	R826	*C4	X701	*F4
D602	J4	IC308	*C5	L302	*G5	Q502	M4	R116	H1	R166	H1	R239	*L5	R284	*K4	R339	*D5	R384	*C4	R439	*N4	R536	K4	R633	*H4	R730	*E4	R827	*C4	X702	*F4
D603	H4	IC309	*C5	L303	*G5	Q503	L4	R117	J1	R167	H1	R240	*K5	R285	*J4	R340	*C5	R385	*B4	R440	*N4	R537	*L4	R634	*G4	R731	*E4	R828	*C4	X703	*E4
D604	H4	IC310	*B5	L304	*F5	Q504	K4	R118	J1	R168	J1	R241	*M5	R286	*J4	R341	*E5	R386	*B4	R441	*N4	R538	*K4	R635	H4	R732	*E4	R829	*B4	X704	*E4
D701	G4	IC401	*R4	L305	H4	Q601	K4	R119	H1	R169	J1	R242	*L5	R287	*J4	R342	*E5	R387	*C4	R442	*N4	R539	*L4	R636	G4	R733	*E4	R830	*B4	X801	*D4
D702	F4	IC402	*P4	L306	G4	Q602	J4	R120	H1	R170	J1	R243	*L5	R288	*J4	R343	*D5	R388	*C4	R443	*N4	R540	*L4	R637	*H4	R734	*E4	R831	*B4	X802	*C4
D703	F4	IC403	*N4	L307	F4	Q603	H4	R121	H1	R171	J2	R244	*K5	R289	*J4	R344	*C5	R389	*B4	R444	*M4	R541	*K4	R638	*H4	R735	E4	R832	*B4	X803	*C4
D704	E4	IC404	*N4	L308	F4	Q604	H4	R125	H2	R172	H1	R245	*M5	R290	*J4	R345	*E5	R390	*B4	R445	*N4	R542	*K4	R639	*H4	R736	E4	R833	*C4	X804	*B4
D801	D4	IC501	*M4	L309	*E5	Q701	G4	R127	H2	R201	*R5	R246	*L5	R301	*H5	R346	*E5	R401	*P4	R446	*M4	R543	*L4	R640	*H4	R737	*F4	R834	*B4		
D802	D4	IC502	*L4	L310	*E5	Q702	F4	R129	H2	R202	*P5	R247	*L5	R302	*G5	R347	*D5	R402	*P4	R447	N4	R544	*K4	R641	*H4	R738	*E4	R835	C4		
D803	C4	IC503	*L4	L311	*D5	Q703	F4	R130	J2	R203	*N5	R248	*K5	R303	*G5	R348	*D5	R403	*P4	R448	N4	R545	*L4	R642	*H4	R739	*F4	R836	B4		
D804	B4	IC504	*K4	L312	*C5	Q704	E4	R131	J2	R204	*N5	R249	*M4	R304	*F5	R349	*E4	R404	*P4	R501	*M4	R546	*K4	R643	*H4	R740	*F4	R837	*C4		

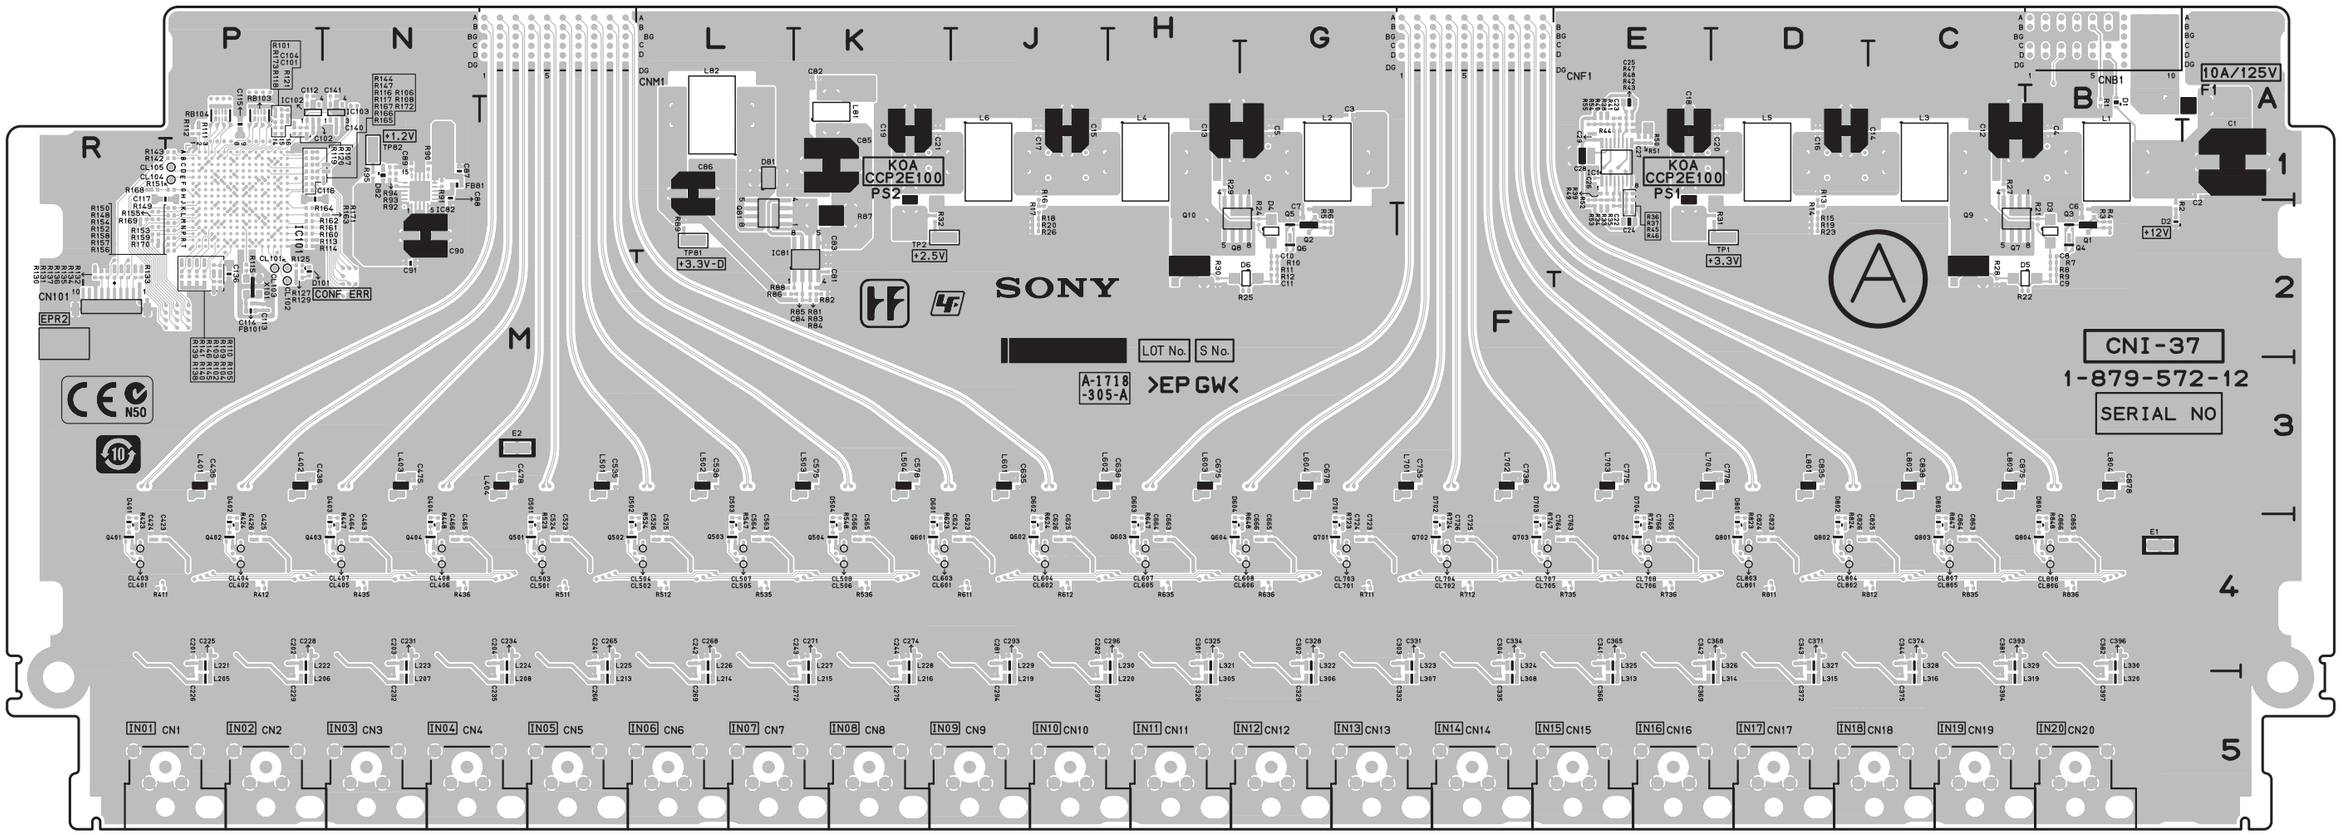

CNI-37/37A -A SIDE-

SUFFIX: -12

CNI-37/37A (1-879-572-12)

*:B SIDE

C1	A1	C111	*P1	C220	*N5	C270	*L5	C320	*G5	C370	*E5	C420	*P4	C470	*N3	C540	*L3	C610	*J4	C660	*G4	C730	*G3	C780	*E3	C850	*B4	CL304	*F5	CN3	N5
C2	A1	C112	P1	C221	*N5	C271	K4	C321	*G5	C371	D4	C421	*P4	C471	*N3	C541	*L4	C611	*J4	C661	*H4	C731	*F3	C801	*D4	C851	*B4	CL305	*E5	CN4	N5
C3	G1	C113	P2	C222	*N4	C272	K5	C322	*F4	C372	D5	C422	*P4	C472	*N3	C542	*K4	C612	*J4	C662	*G4	C732	*F3	C802	*C4	C852	*B4	CL306	*E5	CN5	M5
C4	B1	C114	P2	C223	*N5	C273	*L5	C323	*F5	C373	*D5	C423	R4	C473	*N3	C543	*L4	C613	*J4	C663	H4	C733	*F3	C803	*D4	C853	*C4	CL307	*D5	CN6	M5
C5	G1	C115	P1	C224	*N5	C274	K4	C324	*F5	C374	C4	C424	R4	C474	*N3	C544	*K4	C614	*J4	C664	H4	C734	*F3	C804	*C4	C854	*B4	CL308	*C5	CN7	L5
C6	B2	C116	P1	C225	P4	C275	K5	C325	H4	C375	C5	C425	P4	C475	N3	C545	*L4	C615	*K4	C665	G4	C735	F3	C805	*D4	C855	*C4	CL309	*C5	CN8	K5
C7	G2	C117	R1	C226	P5	C276	*K5	C326	H5	C376	*C5	C426	P4	C476	*N3	C546	*K4	C616	*J4	C666	G4	C736	*F3	C806	*C4	C856	*B4	CL310	*B5	CN9	K5
C8	B2	C118	*P1	C227	*P5	C277	*M4	C327	*H5	C377	*E4	C427	*P3	C477	*N3	C547	*L4	C617	*K4	C667	*H3	C737	*F3	C807	*D4	C857	*C4	CL401	R4	CN10	J5
C9	B2	C119	*P1	C228	P4	C278	*L4	C328	G4	C378	*E4	C428	*P3	C478	M3	C548	*L4	C618	*J4	C668	*H3	C738	F3	C808	*D4	C858	*B4	CL402	P4	CN11	H5
C10	G2	C120	*P1	C229	P5	C279	*L4	C329	G5	C379	*D4	C429	*R3	C479	*M3	C549	*L4	C619	*J4	C669	*H3	C739	*F3	C809	*D4	C859	*C4	CL403	R4	CN12	H5
C11	G2	C121	*P1	C230	*P5	C280	*K4	C330	*G5	C380	*C4	C430	*R3	C480	*M3	C550	*K4	C620	*J4	C670	*H3	C740	*F3	C810	*D4	C860	*B4	CL404	P4	CN13	G5
C12	C1	C122	*P2	C231	N4	C281	J4	C331	F4	C381	C4	C431	*P3	C501	*K4	C551	*K4	C621	*J4	C671	*G3	C741	*E4	C811	*D4	C861	*C4	CL405	N4	CN14	F5
C13	H1	C123	*P2	C232	N5	C282	J4	C332	F5	C382	B4	C432	*P3	C502	*L4	C552	*K4	C622	*J4	C672	*G3	C742	*E4	C812	*D4	C862	*B4	CL406	N4	CN15	F5
C14	D1	C124	*P2	C233	*N5	C283	*J5	C333	*G5	C383	*C5	C433	*P3	C503	*M4	C553	*L4	C623	J4	C673	*G3	C743	*E4	C813	*D4	C863	C4	CL407	N4	CN16	E5
C15	J1	C125	*P2	C234	M4	C284	*J5	C334	F4	C384	*C5	C434	*P3	C504	*L4	C554	*K4	C624	J4	C674	*G3	C744	*E4	C814	*C4	C864	C4	CL408	N4	CN17	D5
C16	D1	C126	*P1	C235	M5	C285	*J5	C335	F5	C385	*B5	C435	P3	C505	*M4	C555	*L4	C625	J4	C675	H3	C745	*E4	C815	*D4	C865	B4	CL501	M4	CN18	D5
C17	J1	C127	*P1	C236	*M5	C286	*J5	C336	*F5	C386	*B5	C436	*P3	C506	*L4	C556	*K4	C626	J4	C676	*H3	C746	*E4	C816	*D4	C866	B4	CL502	L4	CN19	C5
C18	E1	C128	*P1	C237	*P4	C287	*K4	C337	*H4	C387	*C4	C437	*P3	C507	*M4	C557	*L4	C627	*J3	C677	*H3	C747	*F4	C817	*D4	C867	*C3	CL503	M4	CN20	B5
C19	K1	C129	*P2	C238	*P4	C288	*K5	C338	*G4	C388	*C5	C438	P3	C508	*M4	C558	*K4	C628	*J3	C678	G3	C748	*F4	C818	*D4	C868	*C3	CL504	L4	CN101	R2
C20	D1	C130	*P1	C239	*N4	C289	*K5	C339	*G4	C389	*C5	C439	*P3	C509	*M4	C559	*K4	C629	*J3	C679	*G3	C749	*F4	C819	*D4	C869	*C3	CL505	L4	CNB1	B1
C21	K1	C131	*P1	C240	*M4	C290	*J4	C340	*F4	C390	*B4	C440	*P3	C510	*L4	C560	*K4	C630	*K3	C680	*G3	C750	*E4	C820	*C4	C870	*C3	CL506	K4	CNF1	F1
C22	E2	C132	*P1	C241	M4	C291	*J5	C341	E4	C391	*B5	C441	*N4	C511	*L4	C561	*L4	C631	*J3	C701	*G4	C751	*E4	C821	*D4	C871	*B3	CL507	L4	CNM1	M1
C23	E1	C133	*P1	C242	L4	C292	*J5	C342	E4	C392	*B5	C442	*M4	C512	*L4	C562	*K4	C632	*J3	C702	*F4	C752	*E4	C822	*C4	C872	*B3	CL508	K4		
C24	E2	C134	*P2	C243	K4	C293	J4	C343	D4	C393	C4	C443	*N4	C513	*M4	C563	L4	C633	*J3	C703	*G4	C753	*E4	C823	D4	C873	*B3	CL601	K4	D1	B1
C25	E1	C135	*P2	C244	K4	C294	J5	C344	C4	C394	C5	C444	*N4	C514	*L4	C564	L4	C634	*J3	C704	*F4	C754	*E4	C824	D4	C874	*B3	CL602	J4	D2	B2
C26	E1	C136	P2	C245	*M5	C295	*J5	C345	*E5	C395	*C5	C445	*N4	C515	*M4	C565	K4	C635	J3	C705	*G4	C755	*F4	C825	C4	C875	C3	CL603	K4	D3	B2
C27	E1	C137	*P1	C246	*M5	C296	H4	C346	*E5	C396	B4	C446	*M4	C516	*L4	C566	K4	C636	*J3	C706	*F4	C756	*E4	C826	D4	C876	*C3	CL604	J4	D4	G2
C28	E1	C138	*P1	C247	*L5	C297	J5	C347	*E5	C397	B5	C447	*N4	C517	*M4	C567	*L3	C637	*J3	C707	*G4	C757	*F4	C827	*D3	C877	*C3	CL605	H4	D5	C2
C29	E1	C139	*P2	C248	*L5	C298	*J5	C348	*E5	C398	*B5	C448	*N4	C518	*L4	C568	*L3	C638	H3	C708	*G4	C758	*E4	C828	*D3	C878	B3	CL606	G4	D6	G2
C81	K2	C140	N1	C249	*L5	C299	*J4	C349	*D5	C399	*C4	C449	*N4	C519	*M4	C569	*L3	C639	*J3	C709	*G4	C759	*E4	C829	*D3	C879	*B3	CL607	H4	D81	L1
C82	K1	C141	N1	C250	*L5	C300	*J4	C350	*D5	C400	*B4	C450	*N4	C520	*L4	C570	*L3	C640	*J3	C710	*F4	C760	*E4	C830	*D3	C880	*B3	CL608	G4	D82	N1
C83	K2	C201	P4	C251	*K5	C301	H4	C351	*C5	C401	*P4	C451	*N4	C521	*M4	C571	*K3	C641	*H4	C711	*F4	C761	*E4	C831	*C3			CL701	G4	D101	P2
C84	K2	C202	P4	C252	*K5	C302	G4	C352	*C5	C402	*P4	C452	*N4	C522	*L4	C572	*K3	C642	*G4	C712	*F4	C762	*E4	C832	*C3	CL101	P2	CL702	F4	D401	R4
C85	K1	C203	N4	C253	*M4	C303	F4	C353	*F4	C403	*P4	C453	*N4	C523	M4	C573	*K3	C643	*H4	C713	*G4	C763	E4	C833	*D3	CL102	P2	CL703	G4	D402	P4
C86	L1	C204	M4	C254	*M5	C304	F4	C354	*F5	C404	*P4	C454	*M4	C524	M4	C574	*K3	C644	*G4	C714	*F4	C764	E4	C834	*D3	CL103	P2	CL704	F4	D403	N4
C87	N1	C205	*R5	C255	*M5	C305	*H5	C355	*F5	C405	*P4	C455	*N4	C525	L4	C575	K3	C645	*H4	C715	*G4	C765	E4	C835	D3	CL104	P1	CL705	F4	D404	N4
C88	N1	C206	*R5	C256	*L4	C306	*H5	C356	*E4	C406	*P4	C456	*N4	C526	L4	C576	*K3	C646	*G4	C716	*F4	C766	E4	C836	*D3	CL105	P1	CL706	E4	D501	M4
C89	N1	C207	*P5	C257	*L5	C307	*G5	C357	*E5	C407	*R4	C457	*N4	C527	*M3	C577	*K3	C647	*H4	C717	*G4	C767	*E3	C837	*D3	CL201	*P5	CL707	F4	D502	M4
C90	N2	C208	*P5	C258	*L5	C308	*G5	C358	*E5	C408	*R4	C458	*N4	C528	*M3	C578	K3	C648	*H4	C718	*F4	C768	*E3	C838	C3	CL202	*P5	CL708	D4	D503	L4
C91	N2	C209	*N5	C259	L4	C309	*G5	C359	*D4	C409	*R4	C459	*N4	C529	*M3	C579	*K3	C649	*H4	C719	*F4	C769	*E3	C839	*C3	CL203	*N5	CL801	D4	D504	K4
C101	P1	C210	*N5	C260	*L5	C310	*G5	C360	*D5	C410	*P4	C460	*M4	C530	*M3	C580	*K3	C650	*G4	C720	*F4	C770	*F3	C840	*C3	CL204	*M5	CL802	D4	D601	K4
C102	P1	C211	*N5	C261	*L5	C311	*F5	C361	*D5	C411	*P4	C461	*N4	C531	*L3	C601	*J4	C651	*G4	C721	*G4	C771	*E3	C841	*C4	CL205	*M5	CL803	D4	D602	J4
C103	*P1	C212	*N5	C262	*K4	C312	*F5	C362	*D4	C412	*P4	C462	*M4	C532	*L3	C602	*J4	C652	*G4	C722	*F4	C772	*E3	C842	*B4	CL206	*L5	CL804	D4	D603	H4
C104	P1	C213	*R4	C263	*K5	C313	*H4	C363	*D5	C413	*P4	C463	N4	C533	*L3	C603	*J4	C653	*H4	C723	G4	C773	*E3	C843	*C4	CL207	*L5	CL805	C4	D604	H4
C105	*P1	C214	*R5	C264	*K5	C314	*H5	C364	*D5	C414	*P4	C464	N4	C534	*L3	C604	*J4	C654	*G4	C724	G4	C774	*E3	C844	*B4	CL208	*K5	CL806	B4	D701	G4
C106	*P1	C215	*R5	C265	M4	C315	*H5	C365	E4	C415	*R4	C465	N4	C535	*M3	C605	*J4	C655	*H4	C725	F4	C775	E3	C845	*C4	CL209	*J5	CL807	C4	D702	F4
C107	*P1	C216	*P4	C266	M5	C316	*G4	C366	E5	C416	*P4	C466	N4	C536	*M3	C606	*J4	C656	*G4	C726	F4	C776	*E3	C846	*B4	CL210	*J5	CL808	B4	D703	F4
C108	*P1	C217	*P5	C267	*M5	C317	*G5	C367	*E5	C417	*R4	C467	*N3	C537	*M3	C607	*K4	C657	*H4	C727	*G3	C777	*E3	C847	*C4	CL301	*H5			D704	E4
C109	*P1	C218	*P5	C268	L4	C318	*G5	C368	D4	C418	*P4	C468	*N3	C538	L3	C608	*K4	C658	*G4	C728	*G3	C778	D3	C848	*C4	CL302	*G5	CN1	R5	D801	D4
C110	*P1	C219	*N4	C269	L5	C319	*G4	C369	E5	C419	*P4	C469	*N3	C539	*L3	C609	*K4	C659	*H4	C729	*G3	C779	*E3	C849	*C4	CL303	*G5	CN2	P5	D802	D4

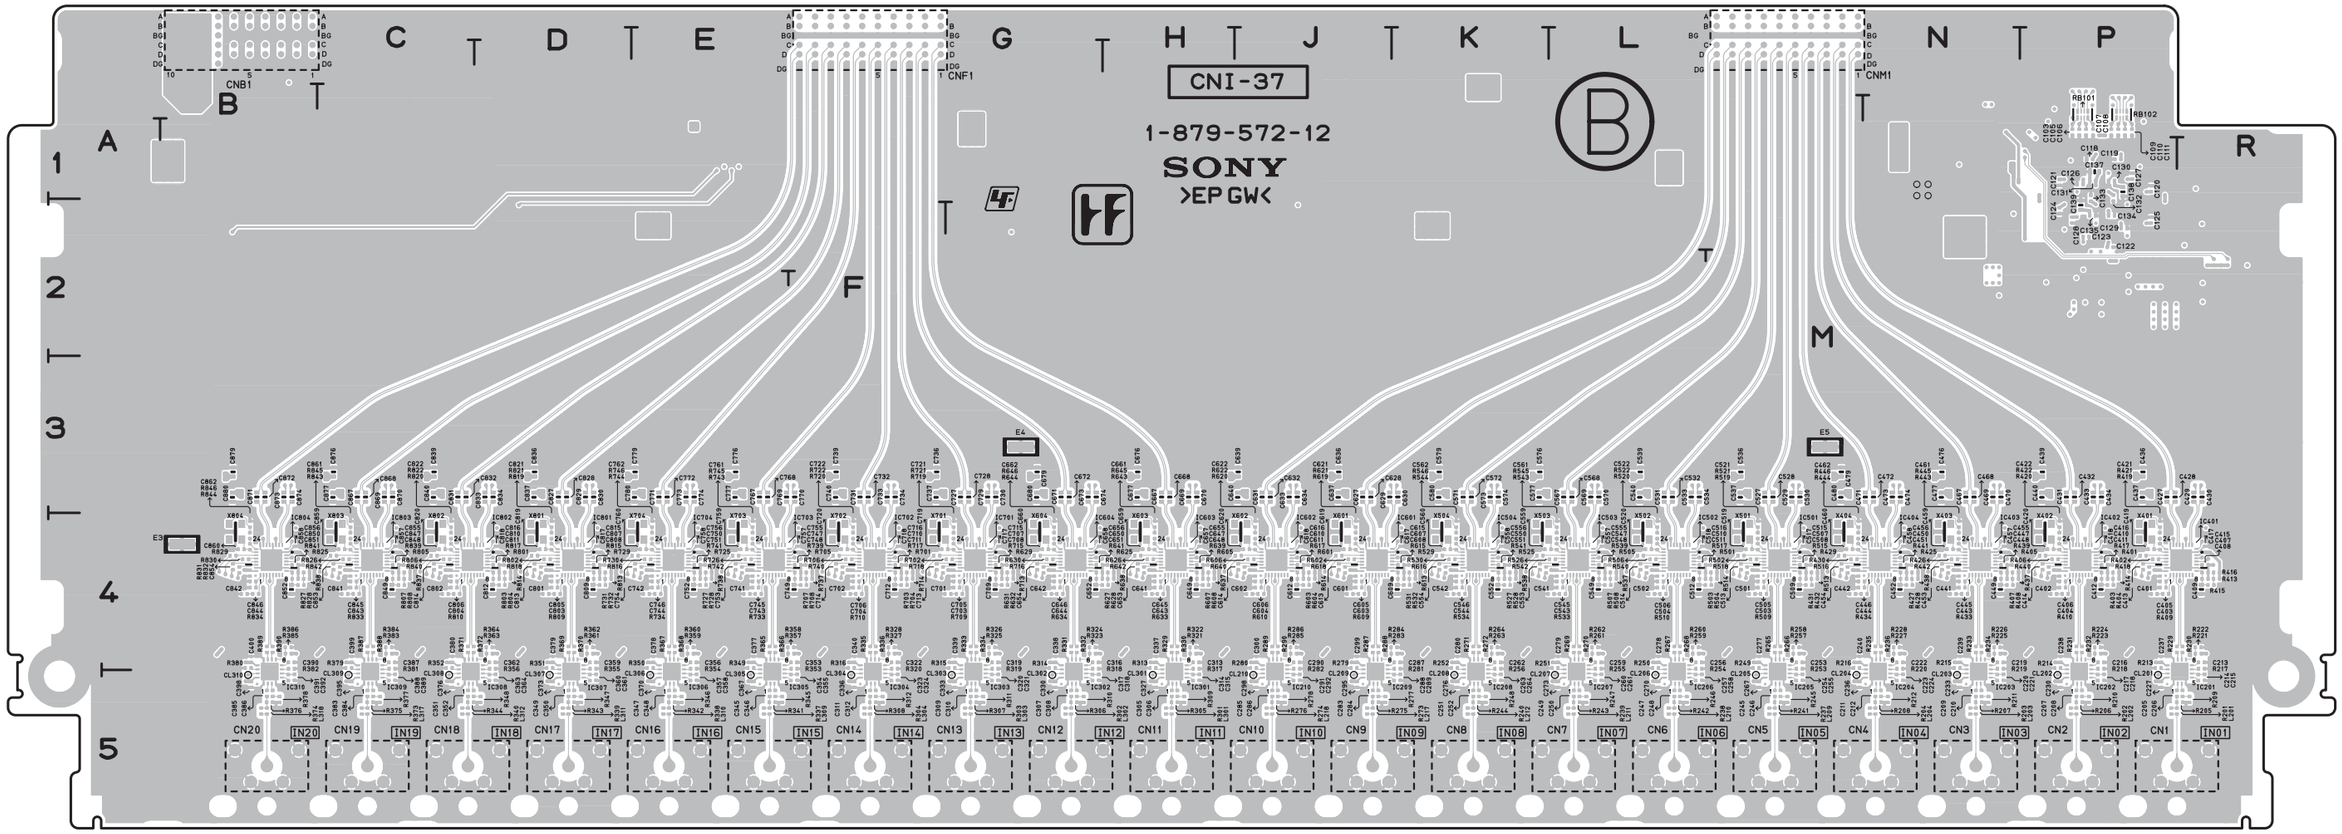

CNI-37/37A -B SIDE-

SUFFIX: -12

D803	C4	IC603	*H4	L302	*G5	PS1	E2	R16	J1	R91	N1	R151	P1	R228	*N4	R278	*J5	R338	*E5	R388	*C4	R448	N4	R602	*J4	R704	*F4	R806	*C4	TP2	K2
D804	B4	IC604	*G4	L303	*G5	PS2	K2	R17	J2	R92	N1	R152	P2	R229	*R4	R279	*J4	R339	*D5	R389	*B4	R501	*M4	R603	*J4	R705	*F4	R807	*C4	TP81	L2
		IC701	*G4	L304	*F5			R18	J2	R93	N1	R153	R2	R230	*R4	R280	*J4	R340	*C5	R390	*B4	R502	*M4	R604	*J4	R706	*F4	R808	*C4	TP82	N1
E1	B4	IC702	*F4	L305	H5	Q1	B2	R19	D2	R94	N1	R154	P2	R231	*P4	R281	*K4	R341	*E5	R401	*P4	R503	*M4	R605	*J4	R707	*F4	R809	*D4		
E2	M3	IC703	*E4	L306	G5	Q2	G2	R20	J2	R95	N1	R155	R2	R232	*P4	R282	*J4	R342	*E5	R402	*P4	R504	*M4	R606	*J4	R708	*F4	R810	*D4	X101	P2
E3	*B4	IC704	*E4	L307	F5	Q3	B2	R21	B2	R101	P1	R156	P2	R233	*N4	R283	*K4	R343	*D5	R403	*P4	R505	*L4	R607	*J4	R709	*G4	R811	D4	X401	*P4
E4	*G3	IC801	*D4	L308	F5	Q4	B2	R22	C2	R102	P2	R157	P2	R234	*N4	R284	*K4	R344	*C5	R404	*P4	R506	*L4	R608	*J4	R710	*F4	R812	C4	X402	*P4
E5	*M3	IC802	*C4	L309	*E5	Q5	G2	R23	D2	R103	P2	R158	P2	R235	*N4	R285	*J4	R345	*E5	R405	*P4	R507	*L4	R609	*J4	R711	G4	R813	*D4	X403	*N4
		IC803	*C4	L310	*E5	Q6	G2	R24	G2	R104	P2	R159	R2	R236	*N4	R286	*J4	R346	*E5	R406	*P4	R508	*L4	R610	*J4	R712	F4	R814	*D4	X404	*M4
F1	A1	IC804	*B4	L311	*D5	Q7	C2	R25	G2	R105	P2	R160	P2	R237	*M5	R287	*J4	R347	*D5	R407	*P4	R509	*M4	R611	J4	R713	*G4	R815	*D4	X501	*M4
				L312	*C5	Q8	H2	R26	J2	R106	P1	R161	P2	R238	*L5	R288	*J4	R348	*D5	R408	*P4	R510	*L4	R612	J4	R714	*F4	R816	*D4	X502	*L4
FB81	N1	L1	B1	L313	E5	Q9	C1	R27	C1	R107	P1	R162	P2	R239	*L5	R289	*J4	R349	*E4	R409	*P4	R511	M4	R613	*K4	R715	*G4	R817	*D4	X503	*K4
FB101	P2	L2	G1	L314	D5	Q10	H2	R28	C2	R108	P1	R163	P2	R240	*K5	R290	*J4	R350	*E4	R410	*P4	R512	L4	R614	*J4	R716	*G4	R818	*D4	X504	*K4
		L3	C1	L315	D5	Q81	L2	R29	H1	R109	P2	R164	P2	R241	*M5	R301	*H5	R351	*D4	R411	R4	R513	*M4	R615	*K4	R717	*F4	R819	*D4	X601	*J4
IC1	E1	L4	H1	L316	C5	Q401	R4	R30	H2	R110	P2	R165	P1	R242	*L5	R302	*G5	R352	*C4	R412	P4	R514	*M4	R616	*K4	R718	*F4	R820	*C4	X602	*J4
IC81	K2	L5	D1	L317	*C5	Q402	P4	R31	D2	R111	P1	R166	P1	R243	*L5	R303	*G5	R353	*F4	R413	*R4	R515	*M4	R617	*J4	R719	*G4	R821	*D4	X603	*H4
IC82	N1	L6	J1	L318	*B5	Q403	N4	R32	K2	R112	P1	R167	P1	R244	*K5	R304	*F5	R354	*E4	R414	*P4	R516	*M4	R618	*J4	R720	*F4	R822	*C4	X604	*G4
IC101	P1	L81	K1	L319	C5	Q404	N4	R33	E2	R113	P2	R168	R1	R245	*M5	R305	*H5	R355	*D4	R415	*R4	R517	*M4	R619	*J4	R721	*G4	R823	D4	X701	*F4
IC102	P1	L82	L1	L320	B5	Q501	M4	R34	E2	R114	P2	R169	R2	R246	*L5	R306	*G5	R356	*D4	R416	*P4	R518	*M4	R620	*J4	R722	*F4	R824	D4	X702	*F4
IC103	N1	L201	*R5	L321	H4	Q502	M4	R35	E2	R115	P2	R170	R2	R247	*L5	R307	*G5	R357	*F4	R417	*P4	R519	*M4	R621	*J4	R723	G4	R825	*C4	X703	*E4
IC201	*R5	L202	*P5	L322	G4	Q503	L4	R36	E1	R116	P1	R171	P2	R248	*K5	R308	*F5	R358	*F4	R418	*P4	R520	*L4	R622	*J4	R724	F4	R826	*C4	X704	*E4
IC202	*P5	L203	*N5	L323	F4	Q504	K4	R37	E2	R117	P1	R172	P1	R249	*M4	R309	*H5	R359	*E4	R419	*P4	R521	*M4	R623	K4	R725	*E4	R827	*C4	X801	*D4
IC203	*N5	L204	*N5	L324	F4	Q601	K4	R38	E1	R118	P1	R173	P1	R250	*L4	R310	*G5	R360	*E4	R420	*P4	R522	*L4	R624	J4	R726	*E4	R828	*C4	X802	*C4
IC204	*N5	L205	P5	L325	E4	Q602	J4	R39	E1	R119	P1	R201	*P5	R251	*L4	R311	*G5	R361	*D4	R421	*P4	R523	M4	R625	*H4	R727	*E4	R829	*B4	X803	*C4
IC205	*M5	L206	P5	L326	D4	Q603	H4	R40	E1	R120	P1	R202	*P5	R252	*K4	R312	*F5	R362	*D4	R422	*P4	R524	L4	R626	*H4	R728	*E4	R830	*B4	X804	*B4
IC206	*G5	L207	N5	L327	D4	Q604	H4	R41	E1	R121	P1	R203	*N5	R253	*M4	R313	*H4	R363	*D4	R423	P4	R525	*K4	R627	*H4	R729	*E4	R831	*B4		
IC207	*L5	L208	M5	L328	C4	Q701	G4	R42	E1	R125	P2	R204	*N5	R254	*L4	R314	*G4	R364	*D4	R424	P4	R526	*L4	R628	*H4	R730	*E4	R832	*B4		
IC208	*K5	L209	*M5	L329	C4	Q702	F4	R43	E1	R127	P2	R205	*R5	R255	*L4	R315	*G4	R365	*E4	R425	*N4	R527	*K4	R629	*G4	R731	*E4	R833	*C4		
IC209	*J5	L210	*L5	L330	B4	Q703	F4	R44	E1	R129	P2	R206	*P5	R256	*K4	R316	*F4	R366	*E4	R426	*N4	R528	*K4	R630	*G4	R732	*E4	R834	*B4		
IC210	*J5	L211	*L5	L401	P3	Q704	E4	R45	E2	R130	R2	R207	*N5	R257	*M4	R317	*H4	R367	*E4	R427	*N4	R529	*K4	R631	*G4	R733	*E4	R835	C4		
IC301	*H5	L212	*K5	L402	P3	Q801	D4	R46	E2	R131	R2	R208	*N5	R258	*M4	R318	*G4	R368	*E4	R428	*N4	R530	*K4	R632	*G4	R734	*E4	R836	B4		
IC302	*G5	L213	M5	L403	N3	Q802	D4	R47	E1	R132	R2	R209	*R5	R259	*L4	R319	*G4	R369	*D4	R429	*M4	R531	*K4	R633	*H4	R735	E4	R837	*C4		
IC303	*G5	L214	L5	L404	M3	Q803	C4	R48	E1	R133	R2	R210	*P5	R260	*L4	R320	*F4	R370	*D4	R430	*M4	R532	*K4	R634	*G4	R736	E4	R838	*B4		
IC304	*F5	L215	K5	L501	M3	Q804	B4	R49	E1	R134	R2	R211	*N5	R261	*L4	R321	*H4	R371	*C4	R431	*M4	R533	*L4	R635	H4	R737	*F4	R839	*C4		
IC305	*E5	L216	K5	L502	L3			R50	E1	R135	R2	R212	*N5	R262	*L4	R322	*H4	R372	*C4	R432	*M4	R534	*K4	R636	G4	R738	*E4	R840	*C4		
IC306	*E5	L217	*J5	L503	K3	R1	B1	R51	E1	R136	R2	R213	*P4	R263	*K4	R323	*G4	R373	*C5	R433	*N4	R535	L4	R637	*H4	R739	*F4	R841	*B4		
IC307	*D5	L218	*J5	L504	K3	R2	B2	R52	E2	R137	R2	R214	*P4	R264	*K4	R324	*G4	R374	*B5	R434	*N4	R536	K4	R638	*H4	R740	*F4	R842	*B4		
IC308	*C5	L219	J5	L601	J3	R3	B2	R53	E2	R138	P2	R215	*N4	R265	*M4	R325	*G4	R375	*C5	R435	N4	R537	*L4	R639	*H4	R741	*E4	R843	*C4		
IC309	*C5	L220	H5	L602	J3	R4	B2	R54	E1	R139	P2	R216	*M4	R266	*M4	R326	*G4	R376	*B5	R436	N4	R538	*K4	R640	*H4	R742	*E4	R844	*B4		
IC310	*G5	L221	P4	L603	H3	R5	G2	R55	E1	R140	P2	R217	*R4	R267	*L4	R327	*F4	R377	*C5	R437	*N4	R539	*L4	R641	*H4	R743	*E4	R845	*B4		
IC401	*R4	L222	P4	L604	G3	R6	G2	R81	K2	R141	P2	R218	*P4	R268	*L4	R328	*F4	R378	*B5	R438	*N4	R540	*L4	R642	*H4	R744	*E4	R846	*B4		
IC402	*P4	L223	N4	L701	F3	R7	B2	R82	K2	R142	P1	R219	*N4	R269	*L4	R329	*H4	R379	*C4	R439	*N4	R541	*K4	R643	*H4	R745	*E4	R847	C4		
IC403	*N4	L224	M4	L702	F3	R8	B2	R83	K2	R143	P1	R220	*N4	R270	*L4	R330	*H4	R380	*B4	R440	*N4	R542	*K4	R644	*G4	R746	*E4	R848	B4		
IC404	*N4	L225	M4	L703	E3	R9	B2	R84	K2	R144	P1	R221	*R4	R271	*K4	R331	*G4	R381	*C4	R441	*N4	R543	*L4	R645	*H4	R747	F4				
IC501	*M4	L226	L4	L704	E3	R10	G2	R85	K2	R145	P2	R222	*R4	R272	*K4	R332	*G4	R382	*B4	R442	*N4	R544	*K4	R646	*G4	R748	E4	RB101	*P1		
IC502	*L4	L227	K4	L801	D3	R11	G2	R86	L2	R146	P2	R223	*P4	R273	*J5	R333	*G4	R383	*C4	R443	*N4	R545	*L4	R647	H4	R801	*D4	RB102	*P1		
IC503	*L4	L228	K4	L802	C3	R12	G2	R87	K2	R147	P1	R224	*P4	R274	*J5	R334	*G4	R384	*C4	R444	*M4	R546	*K4	R648	G4	R802	*D4	RB103	P1		
IC504	*K4	L229	J4	L803	C3	R13	D1	R88	L2	R148	P2	R225	*N4	R275	*J5	R335	*F4	R385	*B4	R445	*N4	R547	L4	R701	*F4	R803	*D4	RB104	P1		
IC601	*J4	L230	H4	L804	B3	R14	D2	R89	L2	R149	R2	R226	*N4	R276	*J5	R336	*F4	R386	*B4	R446	*M4	R548	K4	R702	*G4	R804	*D4				
IC602	*J4	L301	*H5			R15	D2	R90	N1	R150	P2	R227	*N4	R277	*J5	R337	*E5	R387	*C4	R447	N4	R601	*J4	R703	*F4	R805	*C4	TP1	D2		

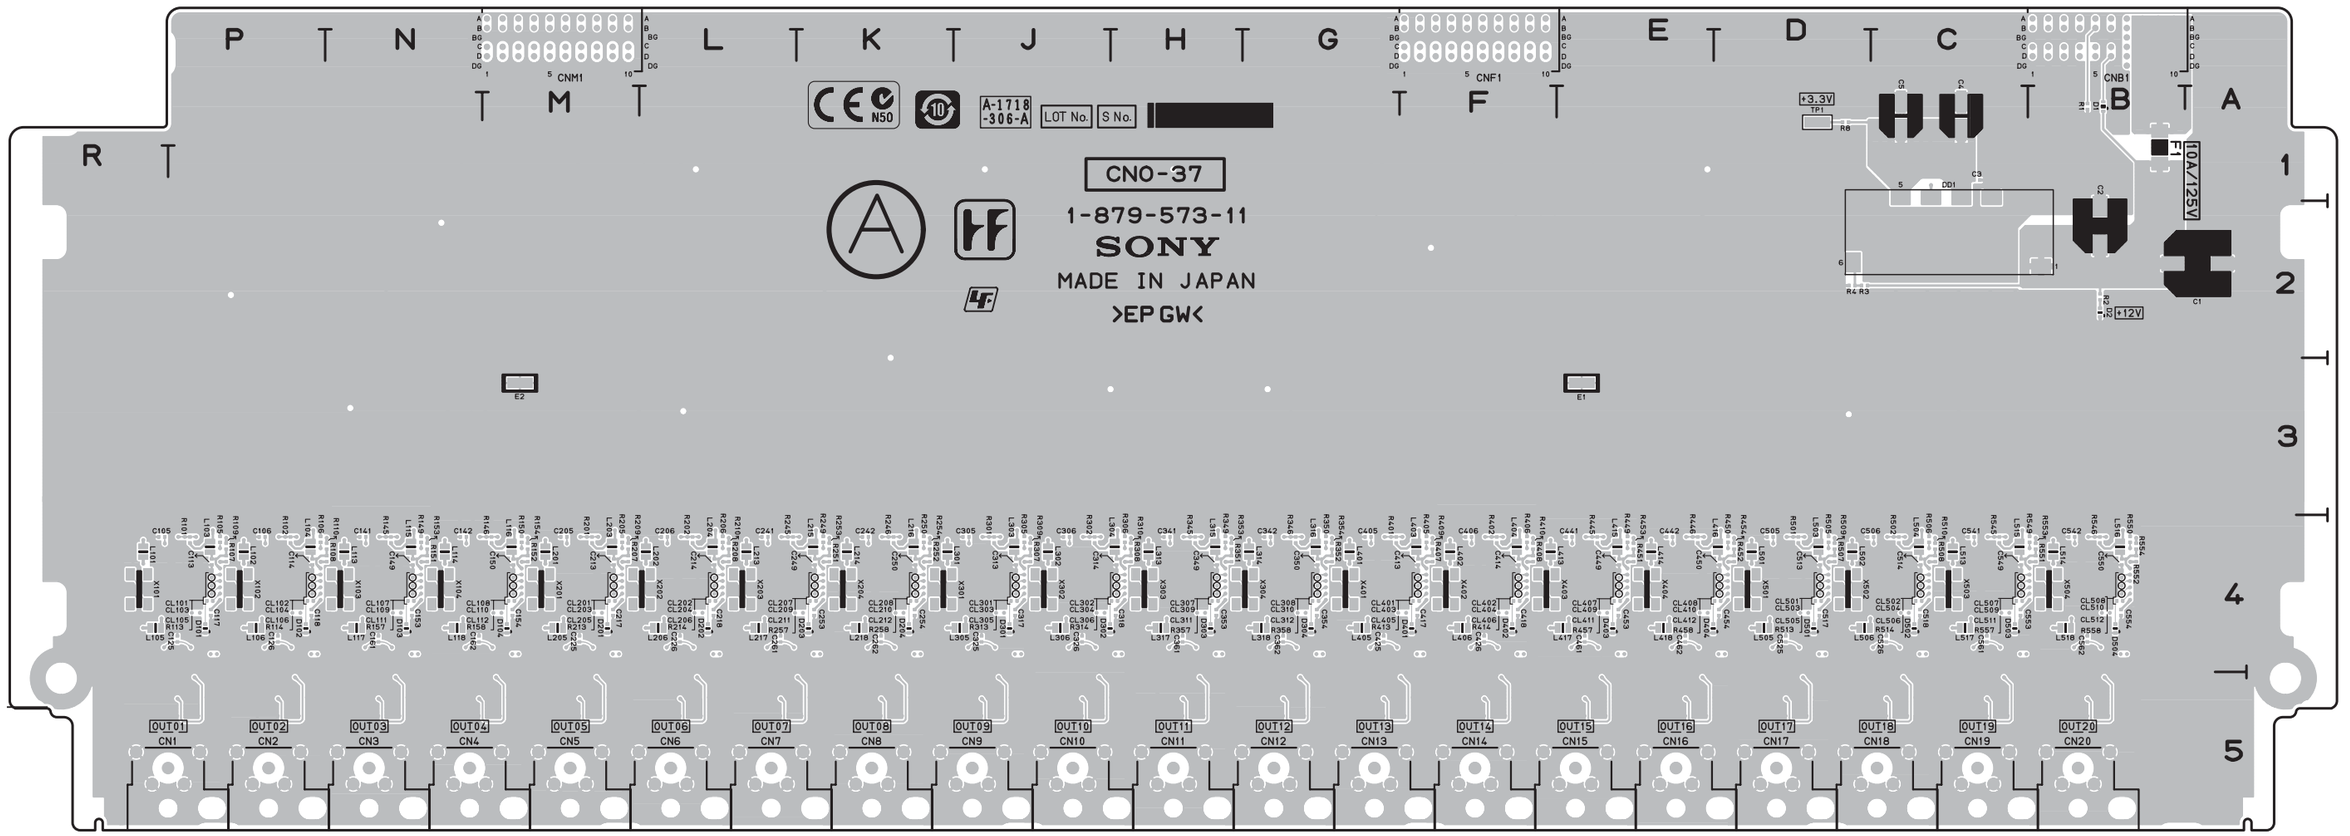

CNO-37 -A SIDE-

SUFFIX: -11

CNO-37 (1-879-573-11)
---
*:B SIDE

C1	A2	C131	*P5	C166	*M5	C229	*M5	C264	*K4	C327	*J4	C362	G4	C425	G4	C460	*E4	C523	*D4	C558	*C4	CL208	K4	CL507	C4	D102	P4	IC106	*M4		
C2	B2	C132	*P5	C167	*N5	C230	*L5	C265	*K5	C328	*J4	C363	*H4	C426	F4	C461	E4	C524	*C4	C559	*B4	CL209	K4	CL508	B4	D103	N4	IC107	*N4	L101	R4
C3	C1	C133	*R5	C168	*N5	C231	*M5	C266	*K5	C329	*J5	C364	*G4	C427	*F4	C462	E4	C525	D4	C560	*B4	CL210	K4	CL509	C4	D104	M4	IC108	*M4	L102	P4
C4	C1	C134	*P5	C169	*N5	C232	*L5	C267	*L5	C330	*J5	C365	*H5	C428	*F4	C463	*E4	C526	C4	C561	C4	CL211	K4	CL510	B4	D201	M4	IC201	*M4	L103	P4
C5	C1	C135	*P5	C170	*N5	C233	*M5	C268	*K5	C331	*J5	C366	*G5	C429	*F5	C464	*E4	C527	*D4	C562	B4	CL212	K4	CL511	C4	D202	L4	IC202	*L4	L104	P4
C101	*R4	C136	*P5	C171	*N5	C234	*M5	C269	*L5	C332	*J5	C367	*H5	C430	*F5	C465	*E5	C528	*C4	C563	*C4	CL301	J4	CL512	B4	D203	K4	IC203	*M4	L105	R4
C102	*P4	C137	*N4	C172	*M5	C235	*L5	C270	*L5	C333	*J5	C368	*G5	C431	*G5	C466	*E5	C529	*D5	C564	*B4	CL302	H4			D204	K4	IC204	*L4	L106	P4
C103	*P4	C138	*N4	C201	*M4	C236	*L5	C271	*K5	C334	*J5	C369	*H5	C432	*F5	C467	*E5	C530	*C5	C565	*C5	CL303	J4	CN1	R5	D301	J4	IC205	*L4	L107	*P4
C104	*P4	C139	*N4	C202	*M4	C237	*L4	C272	*K5	C335	*J5	C370	*H5	C433	*G5	C468	*E5	C531	*D5	C566	*B5	CL304	H4	CN2	P5	D302	J4	IC206	*K4	L108	*P4
C105	R4	C140	*N4	C203	*L4	C238	*L4	C301	*J4	C336	*J5	C371	*G5	C434	*G5	C469	*E5	C532	*C5	C567	*C5	CL305	J4	CN3	N5	D303	H4	IC207	*L4	L109	*R5
C106	P4	C141	N4	C204	*L4	C239	*K4	C302	*J4	C337	*H4	C372	*G5	C435	*F5	C470	*E5	C533	*D5	C568	*B5	CL306	H4	CN4	N5	D304	G4	IC208	*K4	L110	*P5
C107	*R4	C142	N4	C205	M4	C240	*K4	C303	*J4	C338	*H4	C401	*G4	C436	*F5	C471	*E5	C534	*D5	C569	*C5	CL307	H4	CN5	M5	D401	F4	IC301	*J4	L111	*P5
C108	*P4	C143	*N4	C206	L4	C241	L4	C304	*J4	C339	*G4	C402	*G4	C437	*E4	C472	*E5	C535	*C5	C570	*C5	CL308	G4	CN6	M5	D402	F4	IC302	*J4	L112	*P5
C109	*R4	C144	*N4	C207	*M4	C242	K4	C305	J4	C340	*G4	C403	*F4	C438	*E4	C501	*D4	C536	*C5	C571	*B5	CL309	H4	CN7	L5	D403	E4	IC303	*J4	L113	N4
C110	*P4	C145	*N4	C208	*L4	C243	*L4	C306	J4	C341	H4	C404	*F4	C439	*E4	C502	*D4	C537	*C4	C572	*B5	CL310	G4	CN8	K5	D404	E4	IC304	*J4	L114	N4
C111	*R4	C146	*N4	C209	*M4	C244	*K4	C307	*J4	C342	G4	C405	G4	C440	*E4	C503	*D4	C538	*C4			CL311	H4	CN9	K5	D501	D4	IC305	*H4	L115	N4
C112	*P4	C147	*N4	C210	*L4	C245	*L4	C308	*J4	C343	*H4	C406	F4	C441	E4	C504	*C4	C539	*B4	CL101	P4	CL312	G4	CN10	J5	D502	C4	IC306	*G4	L116	M4
C113	P4	C148	*N4	C211	*M4	C246	*K4	C309	*K4	C344	*G4	C407	*G4	C442	E4	C505	D4	C540	*B4	CL102	P4	CL401	F4	CN11	H5	D503	C4	IC307	*H4	L117	N4
C114	P4	C149	N4	C212	*L4	C247	*L4	C310	*J4	C345	*H4	C408	*F4	C443	*E4	C506	D4	C541	C4	CL103	P4	CL402	F4	CN12	H5	D504	B4	IC308	*G4	L118	N4
C115	*R4	C150	M4	C213	M4	C248	*K4	C311	*J4	C346	*G4	C409	*G4	C444	*E4	C507	*D4	C542	B4	CL104	P4	CL403	F4	CN13	G5			IC401	*G4	L119	*N4
C116	*P4	C151	*N4	C214	L4	C249	K4	C312	*J4	C347	*H4	C410	*F4	C445	*F4	C508	*D4	C543	*C4	CL105	P4	CL404	F4	CN14	F5	DD1	C2	IC402	*F4	L120	*M4
C117	P4	C152	*N4	C215	*M4	C250	K4	C313	J4	C348	*G4	C411	*G4	C446	*E4	C509	*D4	C544	*B4	CL106	P4	CL405	F4	CN15	F5			IC403	*G4	L121	*N5
C118	P4	C153	N4	C216	*L4	C251	*L4	C314	H4	C349	H4	C412	*F4	C447	*E4	C510	*D4	C545	*C4	CL107	N4	CL406	F4	CN16	E5	E1	E3	IC404	*F4	L122	*N5
C119	*R4	C154	M4	C217	M4	C252	*K4	C315	*K4	C350	G4	C413	F4	C448	*E4	C511	*D4	C546	*B4	CL108	M4	CL407	E4	CN17	D5	E2	M3	IC405	*E4	L123	*N5
C120	*P4	C155	*N4	C218	L4	C253	K4	C316	*J4	C351	*H4	C414	F4	C449	E4	C512	*D4	C547	*C4	CL109	N4	CL408	D4	CN18	D5	E3	*B3	IC406	*E4	L124	*M5
C121	*R4	C156	*N4	C219	*M4	C254	K4	C317	J4	C352	*G4	C415	*G4	C450	D4	C513	D4	C548	*B4	CL110	M4	CL409	E4	CN19	C5	E4	*J3	IC407	*E4	L201	M4
C122	*P4	C157	*N4	C220	*L4	C255	*L4	C318	H4	C353	H4	C416	*F4	C451	*F4	C514	C4	C549	C4	CL111	N4	CL410	D4	CN20	B5	E5	*R3	IC408	*E4	L202	L4
C123	*P4	C158	*N4	C221	*M4	C256	*K4	C319	*K4	C354	G4	C417	F4	C452	*E4	C515	*D4	C550	B4	CL112	M4	CL411	E4					IC501	*D4	L203	M4
C124	*P4	C159	*N4	C222	*M4	C257	*L4	C320	*J4	C355	*H4	C418	F4	C453	E4	C516	*D4	C551	*C4	CL201	M4	CL412	D4	CNB1	B1	F1	B1	IC502	*C4	L204	L4
C125	P4	C160	*M4	C223	*L4	C258	*L4	C321	*J4	C356	*G4	C419	*G4	C454	D4	C517	D4	C552	*B4	CL202	L4	CL501	D4	CNF1	F1			IC503	*D4	L205	M4
C126	P4	C161	N4	C224	*L4	C259	*K4	C322	*J4	C357	*H4	C420	*F4	C455	*F4	C518	C4	C553	C4	CL203	M4	CL502	C4	CNM1	M1	IC101	*P4	IC504	*C4	L206	L4
C127	*P4	C162	N4	C225	M4	C260	*K4	C323	*J4	C358	*H4	C421	*G4	C456	*E4	C519	*D4	C554	B4	CL204	L4	CL503	D4			IC102	*P4	IC505	*C4	L207	*M4
C128	*P4	C163	*N4	C226	L4	C261	L4	C324	*J4	C359	*G4	C422	*G4	C457	*E4	C520	*D4	C555	*C4	CL205	M4	CL504	C4	D1	B1	IC103	*P4	IC506	*B4	L208	*L4
C129	*P5	C164	*M4	C227	*M4	C262	K4	C325	J4	C360	*G4	C423	*F4	C458	*E4	C521	*D4	C556	*B4	CL206	L4	CL505	D4	D2	B2	IC104	*P4	IC507	*C4	L209	*M5
C130	*P5	C165	*N5	C228	*L4	C263	*K4	C326	J4	C361	H4	C424	*F4	C459	*E4	C522	*D4	C557	*C4	CL207	K4	CL506	C4	D101	P4	IC105	*N4	IC508	*B4	L210	*M5

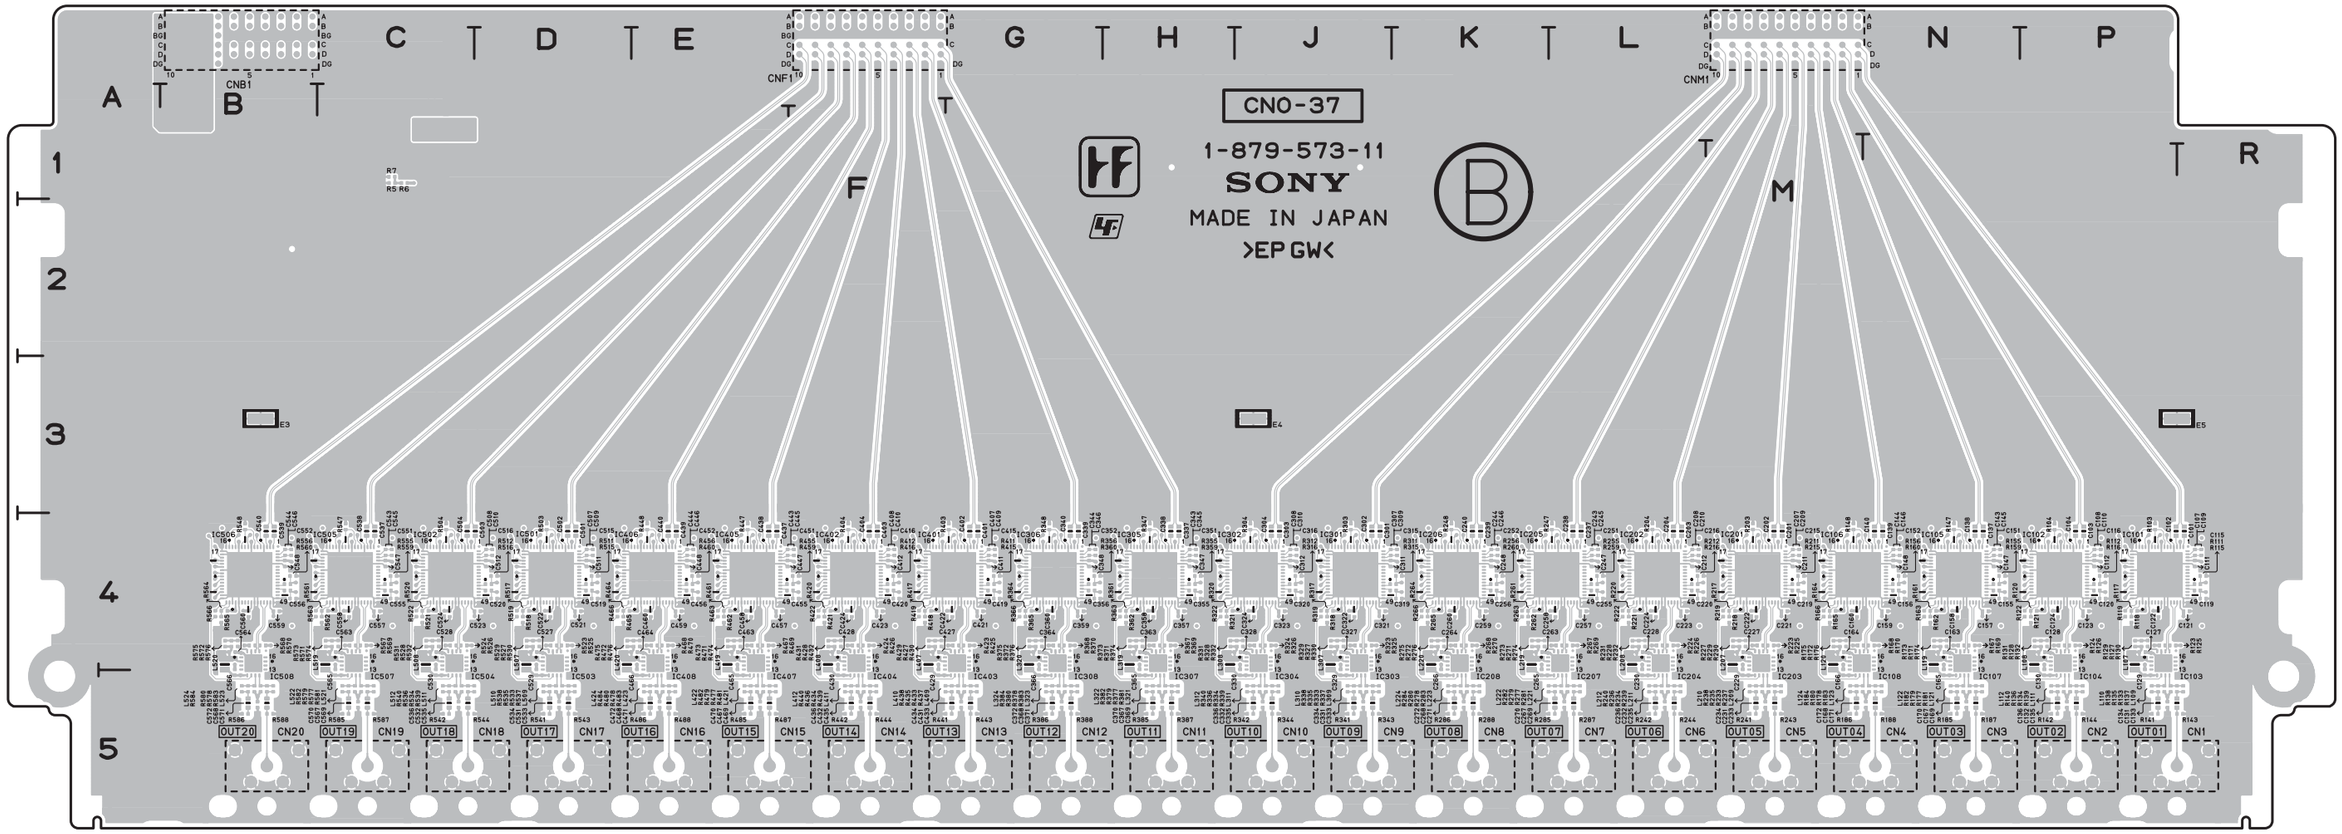

CNO-37 -B SIDE-
SUFFIX: -11

L211	*L5	L322	*H5	L509	*D5	R111	*R4	R146	M4	R181	*N5	R228	*L4	R263	*K4	R310	H4	R345	H4	R380	*G5	R427	*F4	R462	*E4	R509	D4	R544	*C5	R579	*C5
L212	*L5	L323	*G5	L510	*D5	R112	*P4	R147	*N4	R182	*N5	R229	*M4	R264	*K4	R311	*K4	R346	G4	R381	*H5	R428	*F4	R463	*E4	R510	C4	R545	C4	R580	*B5
L213	L4	L324	*G5	L511	*D5	R113	P4	R148	*M4	R183	*N5	R230	*M4	R265	*K4	R312	*J4	R347	*H4	R382	*H5	R429	*F4	R464	*D4	R511	*D4	R546	B4	R581	*C5
L214	K4	L401	G4	L512	*C5	R114	P4	R149	N4	R184	*M5	R231	*L4	R266	*K4	R313	J4	R348	*G4	R383	*G5	R430	*F4	R465	*D4	R512	*D4	R547	*C4	R582	*C5
L215	K4	L402	F4	L513	C4	R115	*R4	R150	M4	R185	*N5	R232	*L4	R267	*L4	R314	H4	R349	H4	R384	*G5	R431	*F4	R466	*D4	R513	D4	R548	*B4	R583	*B5
L216	K4	L403	F4	L514	B4	R116	*P4	R151	N4	R186	*M5	R233	*M5	R268	*K4	R315	*K4	R350	G4	R385	*H5	R432	*F4	R467	*E4	R514	C4	R549	B4	R584	*B5
L217	L4	L404	F4	L515	C4	R117	*P4	R152	M4	R187	*N5	R234	*L5	R269	*L4	R316	*J4	R351	H4	R386	*G5	R433	*G5	R468	*E4	R515	*D4	R550	B4	R585	*C5
L218	K4	L405	G4	L516	B4	R118	*P4	R153	N4	R188	*N5	R235	*M5	R270	*K4	R317	*J4	R352	G4	R387	*H5	R434	*F5	R469	*E4	R516	*D4	R551	B4	R586	*B5
L219	*K4	L406	F4	L517	C4	R119	*P4	R154	M4	R201	M4	R236	*L5	R271	*K4	R318	*J4	R353	H4	R388	*G5	R435	*G5	R470	*E4	R517	*D4	R552	B4	R587	*C5
L220	*K4	L407	*F4	L518	B4	R120	*P4	R155	*N4	R202	L4	R237	*M5	R272	*K4	R319	*J4	R354	G4	R401	G4	R436	*F5	R471	*E4	R518	*D4	R553	B4	R588	*B5
L221	*L5	L408	*F4	L519	*C4	R121	*P4	R156	*N4	R203	*M4	R238	*M5	R273	*K4	R320	*H4	R355	*H4	R402	F4	R437	*G5	R472	*E4	R519	*D4	R554	B4		
L222	*L5	L409	*G5	L520	*B4	R122	*P4	R157	N4	R204	*L4	R239	*L5	R274	*K4	R321	*H4	R356	*G4	R403	*G4	R438	*G5	R473	*E4	R520	*C4	R555	*C4	TP1	D1
L223	*K5	L410	*G5	L521	*C5	R123	*P4	R158	M4	R205	M4	R240	*L5	R275	*K4	R322	*H4	R357	H4	R404	*F4	R439	*F5	R474	*E4	R521	*C4	R556	*B4		
L224	*K5	L411	*F5	L522	*C5	R124	*P4	R159	*N4	R206	L4	R241	*M5	R276	*K4	R323	*J4	R358	G4	R405	F4	R440	*F5	R475	*D4	R522	*C4	R557	C4	X101	R4
L301	K4	L412	*F5	L523	*B5	R125	*P4	R160	*N4	R207	M4	R242	*L5	R277	*L5	R324	*J4	R359	*H4	R406	F4	R441	*G5	R476	*E4	R523	*D4	R558	B4	X102	P4
L302	J4	L413	F4	L524	*B5	R126	*P4	R161	*N4	R208	L4	R243	*M5	R278	*K5	R325	*J4	R360	*G4	R407	F4	R442	*F5	R477	*E5	R524	*C4	R559	*C4	X103	N4
L303	J4	L414	E4			R127	*P4	R162	*N4	R209	M4	R244	*L5	R279	*L5	R326	*J4	R361	*H4	R408	F4	R443	*G5	R478	*E5	R525	*D4	R560	*B4	X104	N4
L304	H4	L415	E4	R1	B1	R128	*P4	R163	*N4	R210	L4	R245	L4	R280	*K5	R327	*J4	R362	*H4	R409	F4	R444	*F5	R479	*E5	R526	*C4	R561	*C4	X201	M4
L305	J4	L416	D4	R2	B2	R129	*P4	R164	*M4	R211	*M4	R246	K4	R281	*L5	R328	*J4	R363	*H4	R410	F4	R445	E4	R480	*E5	R527	*D4	R562	*C4	X202	L4
L306	J4	L417	E4	R3	D2	R130	*P4	R165	*M4	R212	*L4	R247	*L4	R282	*L5	R329	*J4	R364	*G4	R411	*G4	R446	E4	R481	*E5	R528	*C4	R563	*B4	X203	L4
L307	*J4	L418	E4	R4	D2	R131	*P4	R166	*M4	R213	M4	R248	*K4	R283	*K5	R330	*J4	R365	*G4	R412	*F4	R447	*E4	R482	*E5	R529	*D4	R564	*B4	X204	K4
L308	*H4	L419	*E4	R5	*C1	R132	*P4	R167	*N4	R214	L4	R249	K4	R284	*K5	R331	*H4	R366	*G4	R413	F4	R448	*E4	R483	*E5	R530	*D4	R565	*B4	X301	K4
L309	*J5	L420	*D4	R6	*C1	R133	*P5	R168	*M4	R215	*M4	R250	K4	R285	*L5	R332	*J4	R367	*H4	R414	F4	R449	E4	R484	*E5	R531	*C4	R566	*B4	X302	J4
L310	*J5	L421	*E5	R7	*C1	R134	*P5	R169	*N4	R216	*L4	R251	K4	R286	*K5	R333	*J5	R368	*G4	R415	*G4	R450	D4	R485	*E5	R532	*C4	R567	*C4	X303	H4
L311	*J5	L422	*E5	R8	D1	R135	*P5	R170	*N4	R217	*M4	R252	K4	R287	*L5	R334	*J5	R369	*H4	R416	*F4	R451	E4	R486	*E5	R533	*D5	R568	*B4	X304	G4
L312	*J5	L423	*E5	R101	P4	R136	*P5	R171	*N4	R218	*M4	R253	K4	R288	*K5	R335	*J5	R370	*G4	R417	*F4	R452	D4	R487	*E5	R534	*C5	R569	*C4	X401	G4
L313	H4	L424	*E5	R102	P4	R137	*R5	R172	*M4	R219	*M4	R254	K4	R301	J4	R336	*J5	R371	*H4	R418	*F4	R453	E4	R488	*E5	R535	*D5	R570	*B4	X402	F4
L314	G4	L501	D4	R103	*P4	R138	*P5	R173	*N4	R220	*L4	R255	*L4	R302	J4	R337	*J5	R372	*G4	R419	*F4	R454	D4	R501	D4	R536	*C5	R571	*C4	X403	F4
L315	H4	L502	D4	R104	*P4	R139	*P5	R174	*N4	R221	*L4	R256	*K4	R303	*J4	R338	*J5	R373	*H4	R420	*F4	R455	*F4	R502	C4	R537	*D5	R572	*B4	X404	E4
L316	G4	L503	D4	R105	P4	R140	*P5	R175	*M4	R222	*L4	R257	K4	R304	*J4	R339	*J5	R374	*H4	R421	*F4	R456	*E4	R503	*D4	R538	*D5	R573	*C4	X501	D4
L317	H4	L504	C4	R106	P4	R141	*P5	R176	*M4	R223	*M4	R258	K4	R305	J4	R340	*J5	R375	*G4	R422	*F4	R457	E4	R504	*C4	R539	*C5	R574	*C4	X502	D4
L318	G4	L505	D4	R107	P4	R142	*P5	R177	*N5	R224	*L4	R259	*L4	R306	H4	R341	*J5	R376	*G4	R423	*G4	R458	D4	R505	D4	R540	*C5	R575	*B4	X503	C4
L319	*H4	L506	D4	R108	N4	R143	*R5	R178	*N5	R225	*M4	R260	*K4	R307	J4	R342	*J5	R377	*H5	R424	*F4	R459	*F4	R506	C4	R541	*D5	R576	*B4	X504	B4
L320	*G4	L507	*D4	R109	P4	R144	*P5	R179	*N5	R226	*L4	R261	*K4	R308	H4	R343	*J5	R378	*G5	R425	*G4	R460	*E4	R507	D4	R542	*C5	R577	*C5		
L321	*H5	L508	*C4	R110	N4	R145	N4	R180	*N5	R227	*M4	R262	*K4	R309	J4	R344	*J5	R379	*H5	R426	*F4	R461	*E4	R508	C4	R543	*D5	R578	*B5		

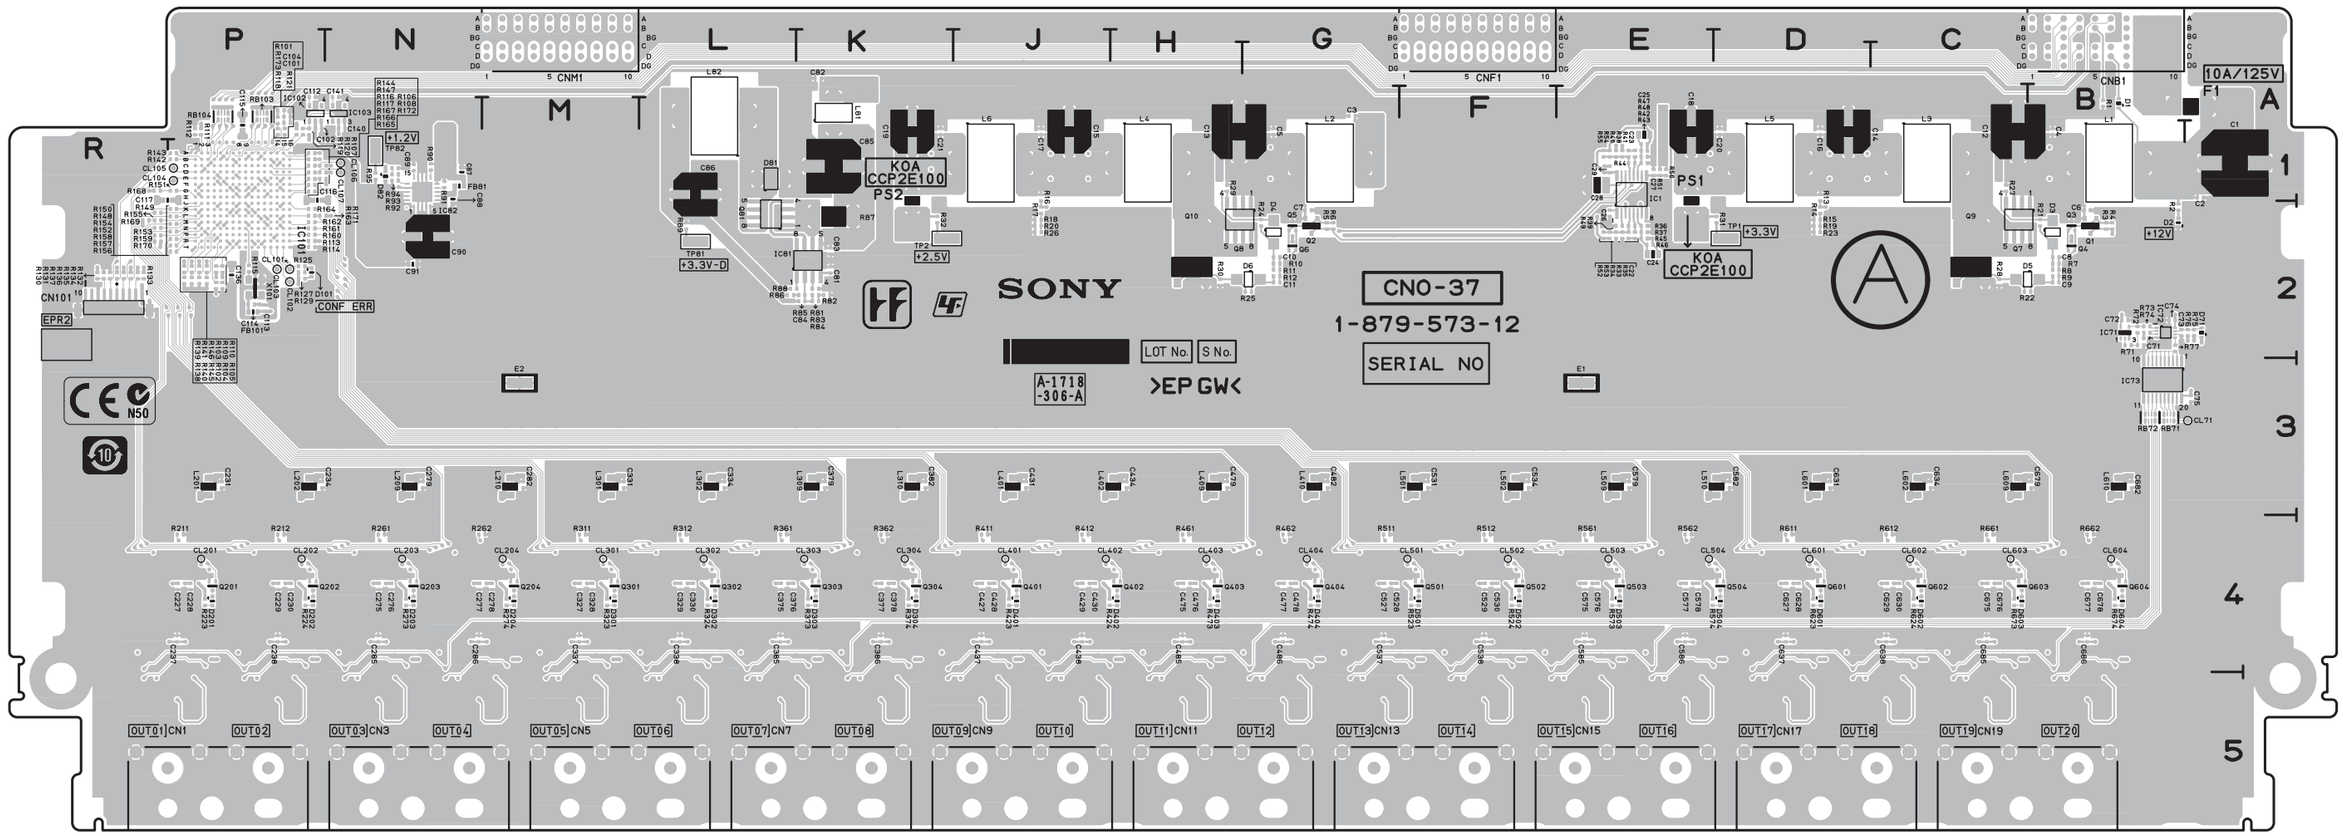

CNO-37 (1-879-573-12)
---
*:B SIDE

C1	A1	C108	*P1	C218	*P4	C269	*N4	C324	*L4	C375	L4	C430	J4	C481	*H3	C536	*F3	C587	*E4	C642	*C5	C693	*C5	CL603	C4	E3	*B3	IC602	*C4	L216	*M5
C2	A1	C109	*P1	C219	*P4	C270	*M4	C325	*M4	C376	L4	C431	J3	C482	G3	C537	G4	C588	*D4	C643	*D5	C694	*C5	CL604	B4	E4	*J3	IC603	*D4	L301	M3
C3	G1	C110	*P1	C220	*P4	C271	*N4	C326	*L4	C377	K4	C432	*J3	C483	*G3	C538	F4	C589	*E5	C644	*C5	C695	*B5			E5	*R3	IC604	*C4	L302	L3
C4	B1	C111	*P1	C221	*P4	C272	*N4	C327	M4	C378	K4	C433	*J3	C484	*G3	C539	*F4	C590	*E5	C645	*D5	C696	*B5	CN1	P5			IC605	*C4	L303	*M4
C5	G1	C112	P1	C222	*P4	C273	*N4	C328	M4	C379	K3	C434	H3	C485	H4	C540	*F4	C591	*E5	C646	*D5	C701	*R4	CN3	N5	F1	A1	IC606	*B4	L304	*L4
C6	B2	C113	P2	C223	*R4	C274	*N4	C329	L4	C380	*K3	C435	*H3	C486	G4	C541	*F5	C592	*E5	C647	*C5	C702	*P4	CN5	M5			IC607	*C4	L305	*M5
C7	G2	C114	P2	C224	*R4	C275	N4	C330	L4	C381	*K3	C436	*H3	C487	*H4	C542	*F5	C593	*E5	C648	*C5	C703	*N4	CN7	K5	FB81	N1	IC608	*B4	L306	*M5
C8	B2	C115	P1	C225	*R4	C276	N4	C331	M3	C382	*K3	C437	J4	C488	*G4	C543	*G5	C594	*E5	C649	*C3	C704	*N4	CN9	J5	FB101	P2	IC701	*R4	L307	*L5
C9	B2	C116	P1	C226	*R4	C277	N4	C332	*M3	C383	*K3	C438	J4	C489	*H5	C544	*F5	C595	*E5	C650	*B3	C721	*M4	CN11	H5			IC702	*P4	L308	*L5
C10	G2	C117	R1	C227	P4	C278	M4	C333	*M3	C384	*K3	C439	*J4	C490	*G5	C545	*G5	C596	*E5	C651	*B3	C722	*L4	CN13	F5	IC1	E1	IC703	*N4	L309	K3
C11	G2	C118	*P1	C228	P4	C279	N3	C334	L3	C385	L4	C440	*H4	C491	*H5	C546	*G5	C601	*D3	C652	*B3	C723	*L4	CN15	E5	IC71	B2	IC704	*N4	L310	K3
C12	C1	C119	*P1	C229	P4	C280	*N3	C335	*L3	C386	K4	C441	*J5	C492	*G5	C547	*F5	C602	*D3	C653	*C4	C724	*K4	CN17	D5	IC72	B2	IC721	*M4	L311	*K4
C13	H1	C120	*P1	C230	P4	C281	*N3	C336	*L3	C387	*K4	C442	*J5	C493	*H5	C548	*F5	C603	*C3	C654	*B4	C741	*K4	CN19	C5	IC73	B3	IC722	*L4	L312	*K4
C14	D1	C121	*P1	C231	P3	C282	M3	C337	M4	C388	*K4	C443	*J5	C494	*H5	C549	*E3	C604	*C3	C655	*C4	C742	*J4	CN101	R2	IC81	K2	IC723	*L4	L313	*L5
C15	J1	C122	*P2	C232	*P3	C283	*M3	C338	L4	C389	*K5	C444	*J5	C495	*G5	C550	*E3	C605	*D4	C656	*B4	C743	*H4	CNB1	B1	IC82	N1	IC724	*K4	L314	*L5
C16	D1	C123	*P2	C233	*P3	C284	*M3	C339	*M4	C390	*K5	C445	*J5	C496	*G5	C551	*E3	C606	*D4	C657	*C4	C744	*G4	CNF1	F1	IC101	P1	IC741	*K4	L315	*K5
C17	J1	C124	P1	C234	P3	C285	N4	C340	*L4	C391	*L5	C446	*J5	C501	*G3	C552	*E3	C607	*D4	C658	*B4	C761	*G4	CNM1	M1	IC102	P1	IC742	*J4	L316	*K5
C18	E1	C125	*P2	C235	*P3	C286	N4	C341	*M5	C392	*K5	C447	*J5	C502	*G3	C553	*E4	C608	*C4	C659	*C4	C762	*F4			IC103	N1	IC743	*H4	L401	J3
C19	K1	C126	*P1	C236	*P3	C287	*N4	C342	*L5	C393	*L5	C448	*J5	C503	*F3	C554	*E4	C609	*D4	C660	*C4	C763	*F4	D1	B1	IC201	*P4	IC744	*G4	L402	H3
C20	D1	C127	*P1	C237	P4	C288	*M4	C343	*M5	C394	*L5	C449	*H3	C504	*F3	C555	*E4	C610	*C4	C661	*C4	C764	*E4	D2	B2	IC202	*P4	IC761	*G4	L403	*J4
C21	K1	C128	*P2	C238	P4	C289	*N5	C344	*L5	C395	*K5	C450	*H3	C505	*G4	C556	*E4	C611	*D4	C662	*B4	C781	*D4	D3	B2	IC203	*P4	IC762	*F4	L404	*H4
C22	E2	C129	*P2	C239	*P4	C290	*M5	C345	*M5	C396	*K5	C451	*G3	C506	*F4	C557	*E4	C612	*D4	C663	*B4	C782	*D4	D4	G2	IC204	*P4	IC763	*F4	L405	*J5
C23	E1	C130	*P1	C240	*P4	C291	*N5	C346	*M5	C401	*J3	C452	*G3	C507	*G4	C558	*E4	C613	*D4	C664	*B4	C783	*C4	D5	C2	IC205	*N4	IC764	*E4	L406	*J5
C24	E2	C131	*P1	C241	*P5	C292	*N5	C347	*L5	C402	*J3	C453	*H4	C508	*F4	C559	*E4	C614	*C4	C665	*C4	C784	*B4	D6	G2	IC206	*N4	IC781	*D4	L407	*J5
C25	E1	C132	*P1	C242	*P5	C293	*N5	C348	*L5	C403	*J3	C454	*G4	C509	*G4	C560	*E4	C615	*C4	C666	*B4			D71	A2	IC207	*N4	IC782	*D4	L408	*J5
C26	E2	C133	*P1	C243	*P5	C294	*N5	C349	*L3	C404	*J3	C455	*H4	C510	*F4	C561	*E4	C616	*C4	C667	*C4	CL71	A3	D81	L1	IC208	*M4	IC783	*C4	L409	H3
C27	E1	C134	*P2	C244	*P5	C295	*N5	C350	*L3	C405	*J4	C456	*G4	C511	*F4	C562	*E4	C617	*D4	C668	*B4	CL101	P2	D82	N1	IC301	*M4	IC784	*B4	L410	G3
C28	E1	C135	*P2	C245	*R5	C296	*M5	C351	*K3	C406	*J4	C457	*H4	C512	*F4	C563	*E4	C618	*D4	C669	*C4	CL102	P2	D101	P2	IC302	*L4			L411	*H4
C29	E1	C136	P2	C246	*P5	C301	*M3	C352	*K3	C407	*J4	C458	*G4	C513	*F4	C564	*E4	C619	*D4	C670	*B4	CL103	P2	D201	P4	IC303	*M4	L1	B1	L412	*G4
C71	B2	C137	*P1	C247	*P5	C302	*M3	C353	*L4	C408	*J4	C459	*H4	C514	*F4	C565	*E4	C620	*C4	C671	*C4	CL104	P1	D202	P4	IC304	*L4	L2	G1	L413	*H5
C72	B2	C138	*P1	C248	*P5	C303	*L3	C354	*K4	C409	*J4	C460	*H4	C515	*F4	C566	*E4	C621	*D4	C672	*B4	CL105	P1	D203	N4	IC305	*L4	L3	C1	L414	*H5
C73	B2	C139	*P2	C249	*N3	C304	*L3	C355	*K4	C410	*J4	C461	*H4	C516	*F4	C567	*E4	C622	*D4	C673	*C4	CL106	N1	D204	M4	IC306	*N4	L4	H1	L415	*G5
C75	A3	C140	N1	C250	*N3	C305	*M4	C356	*K4	C411	*J4	C462	*G4	C517	*G4	C568	*E4	C623	*D4	C674	*B4	CL107	N1	D301	M4	IC307	*L4	L5	D1	L416	*G5
C81	K2	C141	N1	C251	*N3	C306	*L4	C357	*L4	C412	*J4	C463	*G4	C518	*F4	C569	*E4	C624	*D4	C675	C4	CL201	P4	D302	L4	IC308	*K4	L6	J1	L501	F3
C82	K1	C201	*P3	C252	*M3	C307	*M4	C358	*K4	C413	*J4	C464	*G4	C519	*F4	C570	*E4	C625	*D4	C676	C4	CL202	P4	D303	K4	IC401	*J4	L81	K1	L502	F3
C83	K2	C202	*P3	C253	*N4	C308	*L4	C359	*K4	C414	*J4	C465	*H4	C520	*F4	C571	*E4	C626	*D4	C677	B4	CL203	N4	D304	K4	IC402	*J4	L82	L1	L503	*F4
C84	K2	C203	*P3	C254	*N4	C309	*M4	C360	*K4	C415	*J4	C466	*G4	C521	*F4	C572	*E4	C627	D4	C678	B4	CL204	M4	D401	J4	IC403	*J4	L201	P3	L504	*F4
C85	K1	C204	*P3	C255	*N4	C310	*L4	C361	*K4	C416	*J4	C467	*H4	C522	*F4	C573	*E4	C628	D4	C679	B3	CL301	M4	D402	H4	IC404	*J4	L202	P3	L505	*G5
C86	L1	C205	*R4	C256	*N4	C311	*M4	C362	*K4	C417	*J4	C468	*G4	C523	*G4	C574	*E4	C629	C4	C680	*C3	CL302	L4	D403	H4	IC405	*H4	L203	*P4	L506	*G5
C87	M1	C206	*R4	C257	*N4	C312	*M4	C363	*K4	C418	*J4	C469	*G4	C524	*F4	C575	B4	C630	C4	C681	*C3	CL303	K4	D404	G4	IC406	*G4	L204	*P4	L507	*F5
C88	N1	C207	*R4	C258	*N4	C313	*M4	C364	*K4	C419	*J4	C470	*G4	C525	*G4	C576	E4	C631	D3	C682	B3	CL304	K4	D501	F4	IC407	*H4	L205	*R5	L508	*F5
C89	N1	C208	*P4	C259	*N4	C314	*L4	C365	*L4	C420	*J4	C471	*H4	C526	*F4	C577	E4	C632	*D3	C683	*B3	CL401	J4	D502	F4	IC408	*G4	L206	*P5	L509	E3
C90	N2	C209	*R4	C260	*N4	C315	*L4	C366	*K4	C421	*J4	C472	*G4	C527	G4	C578	E4	C633	*D3	C684	*B3	CL402	J4	D503	E4	IC501	*G4	L207	*P5	L510	D3
C91	N2	C210	*P4	C261	*N4	C316	*L4	C367	*K4	C422	*J4	C473	*H4	C528	G4	C579	E3	C634	C3	C685	C4	CL403	H4	D504	D4	IC502	*F4	L208	*P5	L511	*E4
C101	P1	C211	*P4	C262	*M4	C317	*M4	C368	*K4	C423	*J4	C474	*G4	C529	F4	C580	*E3	C635	*C3	C686	B4	CL404	G4	D601	D4	IC503	*G4	L209	N3	L512	*D4
C102	P1	C212	*P4	C263	*M4	C318	*L4	C369	*K4	C424	*J4	C475	H4	C530	F4	C581	*E3	C636	*C3	C687	*C4	CL501	F4	D602	C4	IC504	*F4	L210	M3	L513	*E5
C103	*P1	C213	*P4	C264	*M4	C319	*M4	C370	*K4	C425	*J4	C476	H4	C531	F3	C582	D3	C637	D4	C688	*B4	CL502	F4	D603	C4	IC505	*E4	L211	*N4	L514	*E5
C104	P1	C214	*P4	C265	*N4	C320	*L4	C371	*L4	C426	*J4	C477	G4	C532	*F3	C583	*D3	C638	C4	C689	*C5	CL503	E4	D604	B4	IC506	*E4	L212	*M4	L515	*E5
C105	*P1	C215	*P4	C266	*N4	C321	*M4	C372	*K4	C427	J4	C478	G4	C533	*F3	C584	*D3	C639	*D4	C690	*B5	CL504	E4			IC507	*E4	L213	*N5	L516	*E5
C106	*P1	C216	*P4	C267	*N4	C322	*L4	C373	*L4	C428	J4	C479	H3	C534	F3	C585	E4	C640	*C4	C691	*C5	CL601	D4	E1	E3	IC508	*E4	L214	*N5	L601	D3
C107	*P1	C217	*R4	C268	*M4	C323	*M4	C374	*K4	C429	J4	C480	*H3	C535	*F3	C586	E4	C641	*D5	C692	*B5	CL602	C4	E2	M3	IC601	*D4	L215	*N5	L602	C3

CNO-37 -A SIDE-
SUFFIX: -12

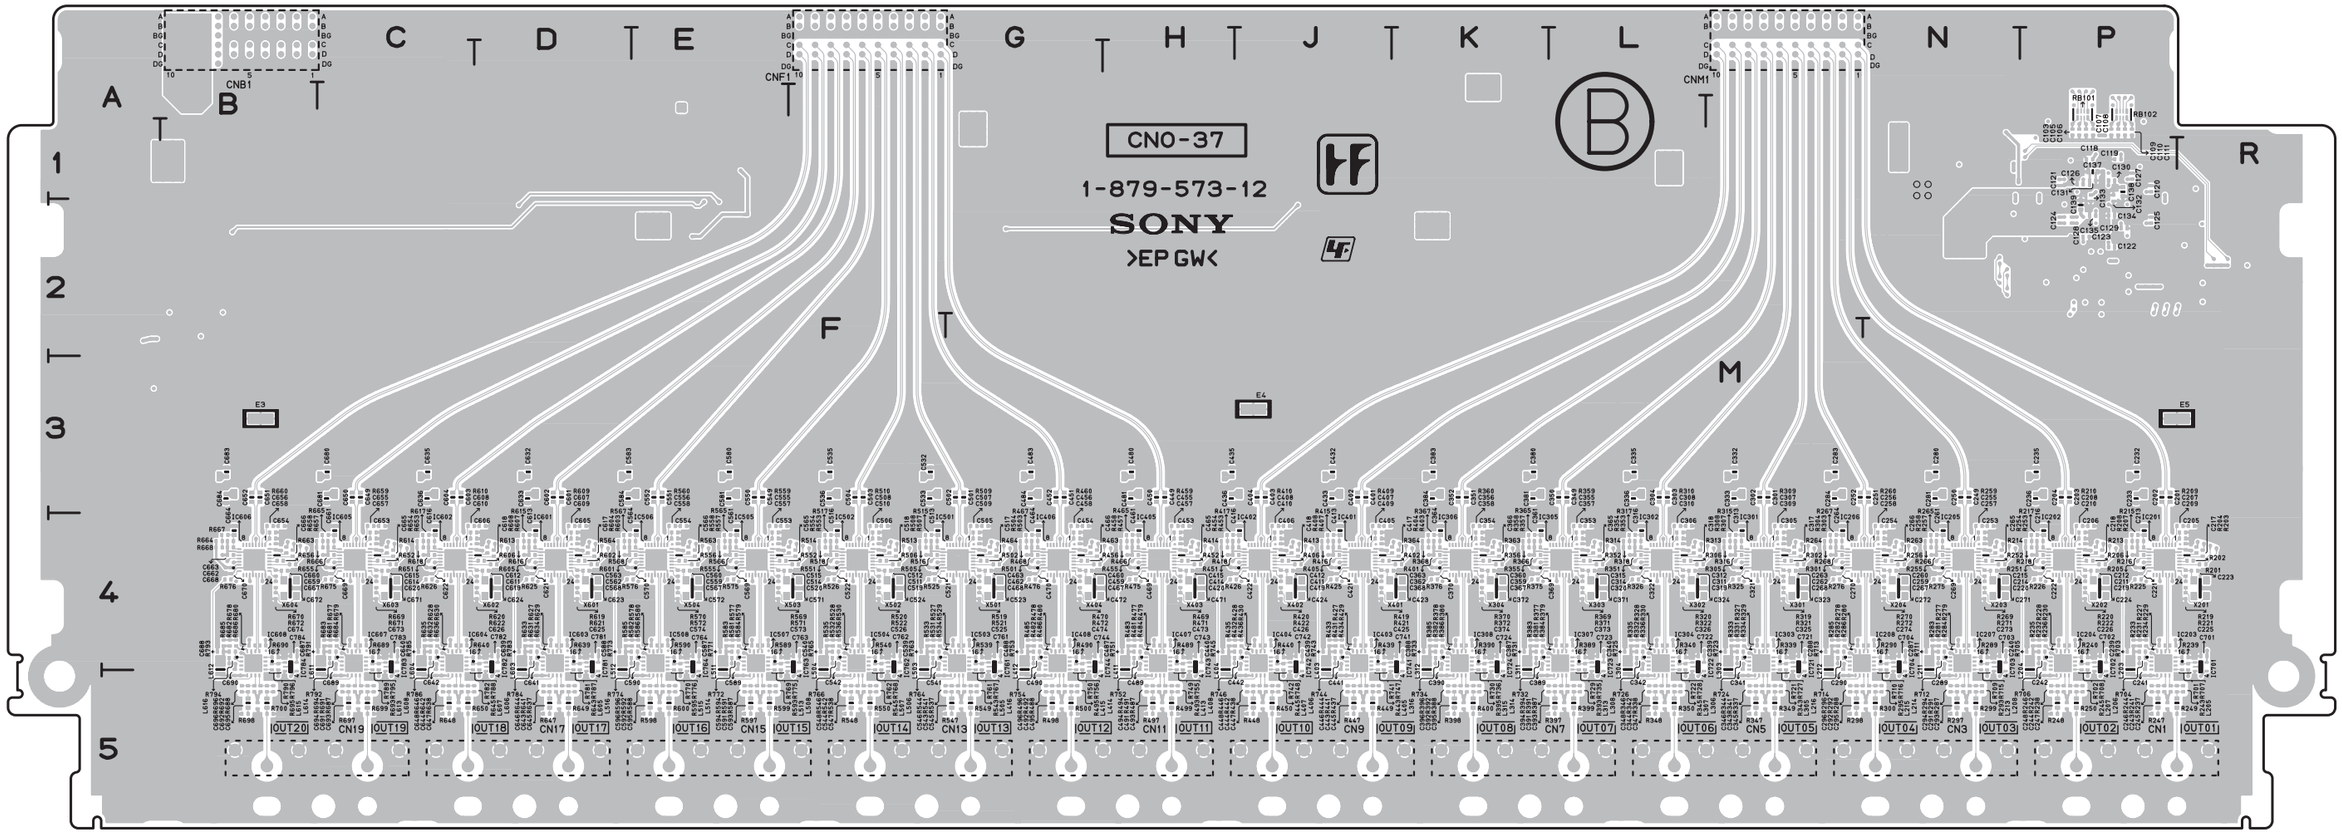

CNO-37 -B SIDE-

SUFFIX: -12

L603	*D4	R2	B2	R53	E2	R132	R2	R210	*P4	R261	N4	R312	L4	R363	*K4	R414	*H4	R465	*H4	R516	*F4	R567	*D4	R618	*C4	R669	*C4	R724	*M4	R787	*D4
L604	*C4	R3	B2	R54	E1	R133	R2	R211	P4	R262	N4	R313	*M4	R364	*K4	R415	*J4	R466	*H4	R517	*F4	R568	*D4	R619	*D4	R670	*B4	R725	*L4	R788	*D4
L605	*D5	R4	B2	R55	E1	R134	R2	R212	P4	R263	*N4	R314	*L4	R365	*K4	R416	*J4	R467	*G4	R518	*F4	R569	*E4	R620	*D4	R671	*C4	R726	*L4	R789	*C4
L606	*D5	R5	G2	R71	B2	R135	R2	R213	*P4	R264	*M4	R315	*M4	R366	*K4	R417	*H4	R468	*G4	R519	*G4	R570	*E4	R621	*D4	R672	*B4	R727	*M4	R790	*B4
L607	*D5	R6	G2	R72	B2	R136	R2	R214	*P4	R265	*N4	R316	*M4	R367	*K4	R418	*H4	R469	*H4	R520	*F4	R571	*E4	R622	*D4	R673	C4	R728	*L4	R791	*C4
L608	*C5	R7	B2	R73	B2	R137	R2	R215	*P4	R266	*N4	R317	*L4	R368	*K4	R419	*J4	R470	*G4	R521	*G4	R572	*E4	R623	D4	R674	B4	R729	*L4	R792	*C4
L609	C3	R8	B2	R74	B2	R138	P2	R216	*P4	R267	*M4	R318	*L4	R369	*L4	R420	*J4	R471	*H4	R522	*F4	R573	E4	R624	C4	R675	*C4	R730	*K4	R793	*B4
L610	B3	R9	B2	R75	A2	R139	P2	R217	*P4	R268	*M4	R319	*M4	R370	*K4	R421	*J4	R472	*G4	R523	F4	R574	E4	R625	*D4	R676	*B4	R731	*K4	R794	*B4
L611	*C4	R10	G2	R76	A2	R140	P2	R218	*P4	R269	*N4	R320	*L4	R371	*L4	R422	*J4	R473	H4	R524	F4	R575	*E4	R626	*C4	R677	*C4	R732	*K4	R795	*C4
L612	*B4	R11	G2	R77	B2	R141	P2	R219	*R4	R270	*N4	R321	*M4	R372	*K4	R423	J4	R474	G4	R525	*F4	R576	*D4	R627	*D4	R678	*B4	R733	*K4	R796	*B4
L613	*C5	R12	G2	R81	K2	R142	P1	R220	*P4	R271	*N4	R322	*L4	R373	K4	R424	J4	R475	*H4	R526	*F4	R577	*E4	R628	*C4	R679	*C4	R734	*K4		
L614	*C5	R13	D1	R82	K2	R143	P1	R221	*R4	R272	*N4	R323	M4	R374	K4	R425	*J4	R476	*G4	R527	*G4	R578	*E4	R629	*D4	R680	*B4	R735	*L4	RB71	B3
L615	*B5	R14	D2	R83	K2	R144	P1	R222	*P4	R273	N4	R324	L4	R375	*K4	R426	*J4	R477	*H4	R528	*F4	R579	*E4	R630	*C4	R681	*C4	R736	*K4	RB72	B3
L616	*B5	R15	D2	R84	K2	R145	P2	R223	P4	R274	M4	R325	*M4	R376	*K4	R427	*J4	R478	*G4	R529	*G4	R580	*E4	R631	*D4	R682	*B4	R741	*J4	RB101	*P1
		R16	J1	R85	K2	R146	P2	R224	P4	R275	*N4	R326	*L4	R377	*L4	R428	*J4	R479	*H4	R530	*F4	R581	*E4	R632	*C4	R683	*C4	R742	*J4	RB102	*P1
PS1	E2	R17	J2	R86	L2	R147	P1	R225	*P4	R276	*M4	R327	*M4	R378	*K4	R429	*J4	R480	*G4	R531	*F4	R582	*E4	R633	*D4	R684	*C4	R743	*J4	RB103	P1
PS2	K2	R18	J2	R87	K2	R148	P2	R226	*P4	R277	*N4	R328	*L4	R379	*L4	R430	*J4	R481	*H4	R532	*F4	R583	*E4	R634	*D4	R685	*B4	R744	*J4	RB104	P1
		R19	D2	R88	L2	R149	R2	R227	*P4	R278	*M4	R329	*M4	R380	*K4	R431	*J4	R482	*G4	R533	*F4	R584	*E4	R635	*C4	R686	*B4	R745	*J4		
Q1	B2	R20	J2	R89	L2	R150	P2	R228	*P4	R279	*N4	R330	*L4	R381	*K4	R432	*J4	R483	*H4	R534	*F4	R585	*D4	R636	*C4	R687	*C5	R746	*J4	TP1	D2
Q2	G2	R21	B2	R90	N1	R151	P1	R229	*P4	R280	*N4	R331	*M4	R382	*K4	R433	*J4	R484	*H4	R535	*F4	R586	*E4	R637	*D5	R688	*B5	R747	*J4	TP2	K2
Q3	B2	R22	C2	R91	N1	R152	P2	R230	*P4	R281	*N4	R332	*L4	R383	*K4	R434	*J4	R485	*G4	R536	*F4	R587	*E5	R638	*C5	R689	*C4	R748	*J4	TP81	L2
Q4	B2	R23	D2	R92	N1	R153	R2	R231	*P4	R282	*M4	R333	*M4	R384	*K4	R435	*H4	R486	*G4	R537	*G5	R588	*E5	R639	*D4	R690	*B4	R749	*H4	TP82	N1
Q5	G2	R24	G2	R93	N1	R154	P2	R232	*P4	R283	*N4	R334	*M4	R385	*K4	R436	*J4	R487	*H5	R538	*F5	R589	*E4	R640	*D4	R691	*C5	R750	*G4		
Q6	G2	R25	G2	R94	N1	R155	R2	R233	*P4	R284	*N4	R335	*L4	R386	*K4	R437	*J5	R488	*G5	R539	*G4	R590	*E4	R641	*D5	R692	*B5	R751	*H4	X101	P2
Q7	C2	R26	J2	R95	N1	R156	P2	R234	*P4	R285	*M4	R336	*L4	R387	*L5	R438	*J5	R489	*H4	R540	*F4	R591	*E5	R642	*C5	R693	*C5	R752	*H4	X201	*R4
Q8	H2	R27	C1	R101	P1	R157	P2	R235	*P4	R286	*M4	R337	*M5	R388	*K5	R439	*J4	R490	*G4	R541	*G5	R592	*E5	R643	*D5	R694	*C5	R753	*G4	X202	*P4
Q9	C2	R28	C2	R102	P2	R158	P2	R236	*P4	R287	*N5	R338	*L5	R389	*L4	R440	*J4	R491	*H5	R542	*F5	R593	*E5	R644	*D5	R695	*B5	R754	*G4	X203	*N4
Q10	H2	R29	H1	R103	P2	R159	P2	R237	*P5	R288	*N5	R339	*M4	R390	*K4	R441	*J5	R492	*G5	R543	*G5	R594	*E5	R645	*C5	R696	*B5	R755	*H4	X204	*N4
Q81	L2	R30	H2	R104	P2	R160	P2	R238	*P5	R289	*N4	R340	*L4	R391	*L5	R442	*J5	R493	*H5	R544	*G5	R595	*E5	R646	*C5	R697	*C5	R756	*G4	X301	*M4
Q201	P4	R31	D2	R105	P2	R161	P2	R239	*R4	R290	*N4	R341	*M5	R392	*K5	R443	*J5	R494	*H5	R545	*F5	R596	*E5	R647	*D5	R698	*B5	R761	*G4	X302	*L4
Q202	P4	R32	K2	R106	P1	R162	P2	R240	*P4	R291	*N5	R342	*L5	R393	*L5	R444	*J5	R495	*G5	R546	*F5	R597	*E5	R648	*C5	R699	*C5	R762	*F4	X303	*L4
Q203	N4	R33	E2	R107	P1	R163	P2	R241	*P5	R292	*N5	R343	*M5	R394	*L5	R445	*J5	R496	*G5	R547	*G5	R598	*E5	R649	*D5	R700	*B5	R763	*F4	X304	*K4
Q204	M4	R34	E2	R108	P1	R164	P2	R242	*P5	R293	*N5	R344	*M5	R395	*K5	R446	*J5	R497	*H5	R548	*F5	R599	*E5	R650	*C5	R701	*R4	R764	*F4	X401	*K4
Q301	M4	R35	E2	R109	P2	R165	P1	R243	*R5	R294	*N5	R345	*L5	R396	*K5	R447	*J5	R498	*G5	R549	*G5	R600	*E5	R651	*C4	R702	*P4	R765	*F4	X402	*J4
Q302	L4	R36	E2	R110	P2	R166	P1	R244	*P5	R295	*N5	R346	*L5	R397	*L5	R448	*J5	R499	*H5	R550	*F5	R601	*D4	R652	*C4	R703	*P4	R766	*F4	X403	*H4
Q303	K4	R37	D2	R111	P1	R167	P1	R245	*P4	R296	*M5	R347	*M5	R398	*K5	R449	*J5	R500	*G5	R551	*F4	R602	*D4	R653	*C4	R704	*P4	R767	*G4	X404	*G4
Q304	K4	R38	E1	R112	P1	R168	R1	R246	*P5	R297	*N5	R348	*L5	R399	*L5	R450	*J5	R501	*G4	R552	*E4	R603	*D4	R654	*C4	R705	*P4	R768	*F4	X501	*G4
Q401	J4	R39	E2	R113	P2	R169	R2	R247	*P5	R298	*M5	R349	*M5	R400	*K5	R451	*H4	R502	*G4	R553	*F4	R604	*D4	R655	*B4	R706	*P4	R769	*E4	X502	*F4
Q402	H4	R40	E1	R114	P2	R170	R2	R248	*P5	R299	*N5	R350	*L5	R401	*K4	R452	*H4	R503	*G4	R554	*F4	R605	*D4	R656	*B4	R707	*R4	R770	*E4	X503	*F4
Q403	H4	R41	E1	R115	P2	R171	P2	R249	*R5	R300	*N5	R351	*L4	R402	*J4	R453	*H4	R504	*G4	R555	*E4	R606	*D4	R657	*B4	R708	*P4	R771	*E4	X504	*E4
Q404	G4	R42	E1	R116	P1	R172	P1	R250	*P5	R301	*M4	R352	*L4	R403	*K4	R454	*H4	R505	*F4	R556	*E4	R607	*D4	R658	*B4	R709	*N4	R772	*E4	X601	*D4
Q501	F4	R43	E1	R117	P1	R173	P1	R251	*N4	R302	*M4	R353	*L4	R404	*K4	R455	*G4	R506	*F4	R557	*E4	R608	*D4	R659	*C4	R710	*N4	R773	*E4	X602	*D4
Q502	F4	R44	E1	R118	P1	R201	*R4	R252	*N4	R303	*M4	R354	*L4	R405	*J4	R456	*G4	R507	*F4	R558	*E4	R609	*D4	R660	*B4	R711	*N4	R774	*E4	X603	*C4
Q503	E4	R45	E2	R119	P1	R202	*R4	R253	*N4	R304	*M4	R355	*K4	R406	*J4	R457	*G4	R508	*F4	R559	*E4	R610	*C4	R661	C4	R712	*N4	R775	*E4	X604	*B4
Q504	D4	R46	E2	R120	P1	R203	*R4	R254	*N4	R305	*L4	R356	*K4	R407	*J4	R458	*G4	R509	*G4	R560	*E4	R611	D4	R662	B4	R713	*M4	R776	*E4		
Q601	D4	R47	E1	R121	P1	R204	*R4	R255	*N4	R306	*L4	R357	*K4	R408	*J4	R459	*H4	R510	*F4	R561	E4	R612	C4	R663	*C4	R714	*M4	R781	*D4		
Q602	C4	R48	E1	R125	P2	R205	*P4	R256	*N4	R307	*L4	R358	*K4	R409	*J4	R460	*G4	R511	G4	R562	E4	R613	*D4	R664	*B4	R715	*N4	R782	*C4		
Q603	C4	R49	E2	R127	P2	R206	*P4	R257	*N4	R308	*L4	R359	*L4	R410	*J4	R461	H4	R512	F4	R563	*E4	R614	*C4	R665	*C4	R716	*N4	R783	*D4		
Q604	B4	R50	E1	R129	P2	R207	*P4	R258	*N4	R309	*M4	R360	*K4	R411	J4	R462	G4	R513	*F4	R564	*D4	R615	*D4	R666	*C4	R721	*M4	R784	*D4		
		R51	E1	R130	R2	R208	*P4	R259	*N4	R310	*L4	R361	L4	R412	J4	R463	*H4	R514	*F4	R565	*E4	R616	*D4	R667	*B4	R722	*L4	R785	*C4		
R1	B1	R52	E2	R131	R2	R209	*R4	R260	*N4	R311	M4	R362	K4	R413	*J4	R464	*G4	R515	*F4	R566	*E4	R617	*C4	R668	*B4	R723	*M4	R786	*C4		

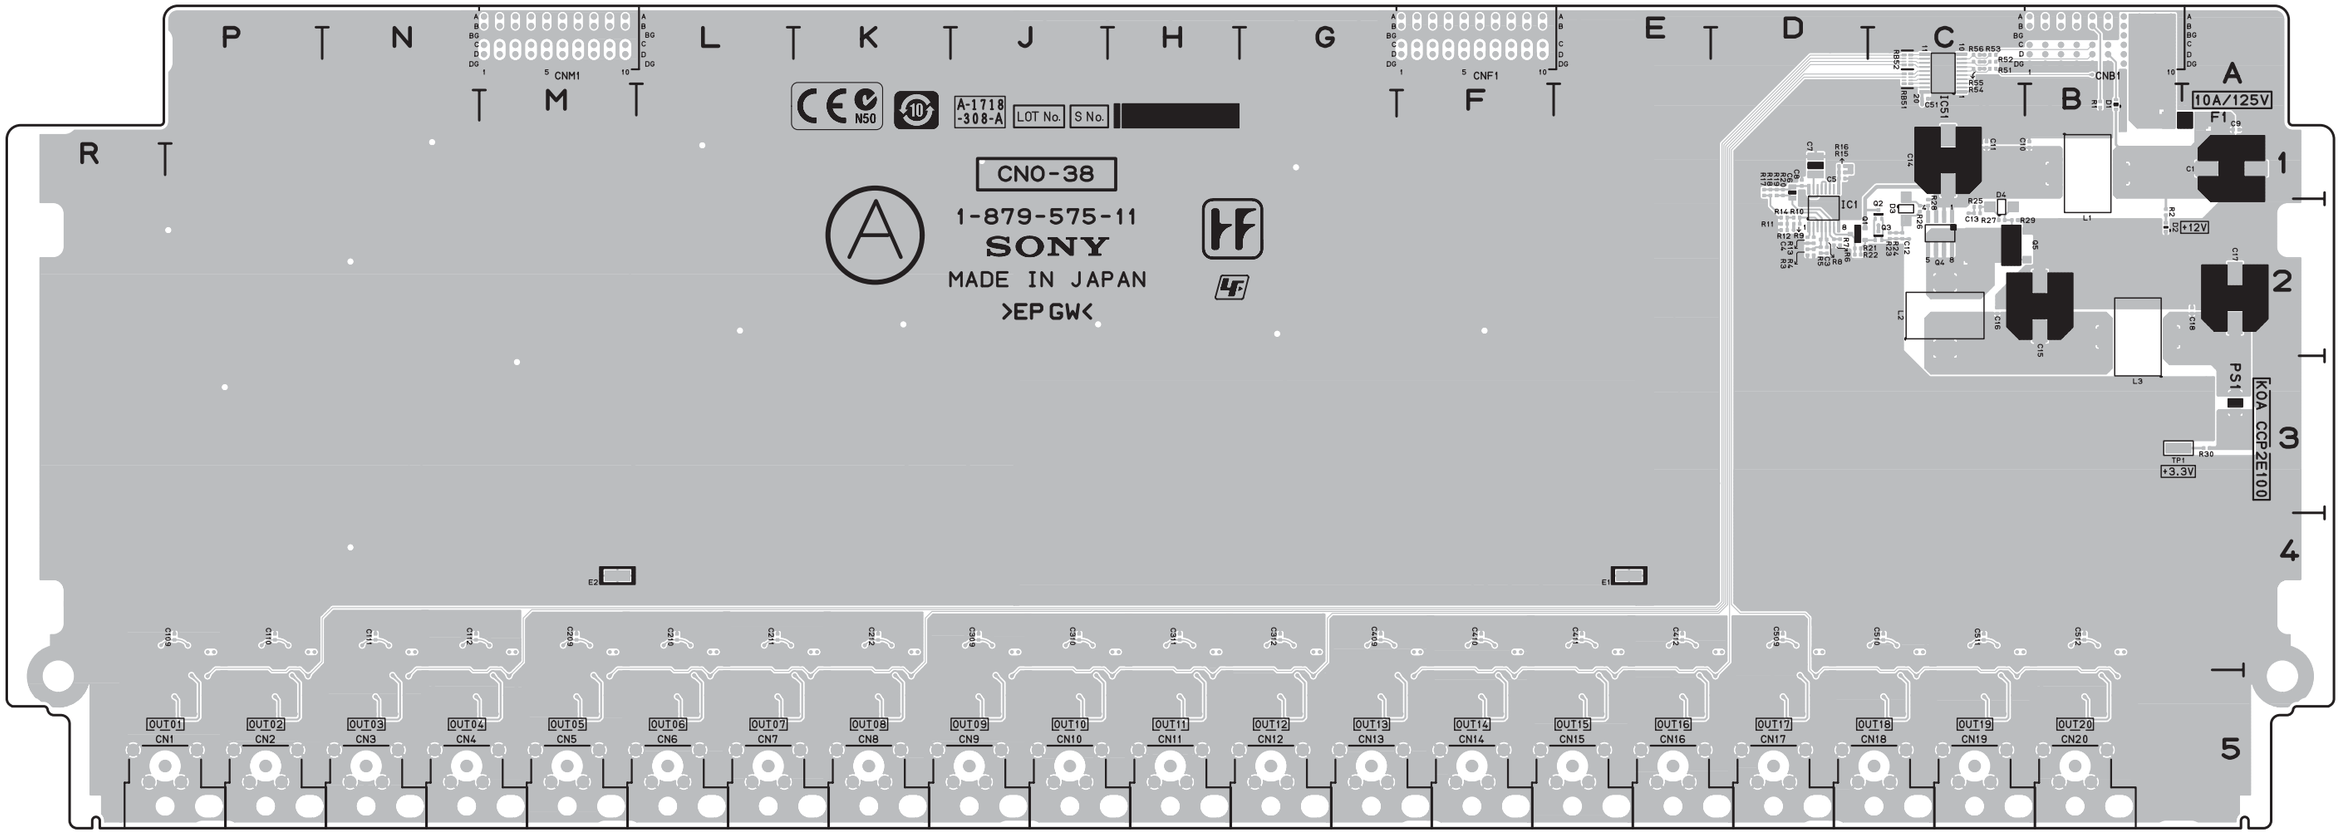

CNO-38/38A/38B -A SIDE-
SUFFIX: -11

```
-----------------------------
CNO-38/38A/38B (1-879-575-11)
-----------------------------
*:B SIDE
```

C1	A1	C114	*P4	C213	*M4	C312	G4	C411	E4	C510	C4	CN8	K5	IC1	D2	L106	*P5	L401	*F4	Q5	C2	R30	A3	R125	*P5	R212	*K4	R243	*L5	R330	*J5
C3	D2	C115	*N4	C214	*L4	C313	*J4	C412	E4	C511	C4	CN9	K5	IC51	C1	L107	*P5	L402	*F4			R51	C1	R126	*P5	R213	*M4	R244	*K5	R331	*J5
C4	D2	C116	*M4	C215	*K4	C314	*J4	C413	*F4	C512	B4	CN10	J5	IC101	*P4	L108	*P5	L403	*E4	R1	B1	R52	C1	R127	*N5	R214	*M4	R301	*J4	R332	*J5
C5	D1	C117	*P5	C216	*K4	C315	*H4	C414	*F4	C513	*D4	CN11	H5	IC102	*P4	L109	*N5	L404	*D4	R2	B2	R53	C1	R128	*N5	R215	*L4	R302	*J4	R333	*H5
C6	D1	C118	*P5	C217	*M5	C316	*G4	C415	*E4	C514	*C4	CN12	H5	IC103	*N4	L110	*N5	L405	*G5	R3	D2	R54	C1	R129	*R5	R216	*L4	R303	*H4	R334	*H5
C7	D1	C119	*N5	C218	*L5	C317	*J5	C416	*E4	C515	*C4	CN13	G5	IC104	*M4	L111	*N5	L406	*G5	R4	D2	R55	C1	R130	*P5	R217	*K4	R304	*G4	R335	*G5
C8	D1	C120	*M5	C219	*K5	C318	*J5	C417	*F5	C516	*B4	CN14	F5	IC201	*M4	L112	*M5	L407	*F5	R5	D2	R56	C1	R131	*P5	R218	*K4	R305	*J4	R336	*G5
C9	A1	C121	*P5	C220	*K5	C319	*H5	C418	*F5	C517	*D5	CN15	F5	IC202	*L4	L201	*M4	L408	*F5	R6	D2	R101	*P4	R132	*P5	R219	*K4	R306	*J4	R337	*J5
C10	B1	C122	*P5	C221	*M5	C320	*G5	C419	*E5	C518	*C5	CN16	E5	IC203	*L4	L202	*L4	L409	*E5	R7	D2	R102	*P4	R133	*N5	R220	*K4	R307	*H4	R338	*J5
C11	C1	C123	*N5	C222	*L5	C321	*J5	C420	*E5	C519	*C5	CN17	D5	IC204	*K4	L203	*K4	L410	*E5	R8	D2	R103	*N4	R134	*N5	R221	*M5	R308	*G4	R339	*H5
C12	C2	C124	*N5	C223	*L5	C322	*J5	C421	*G5	C520	*B5	CN18	D5	IC301	*J4	L204	*K4	L411	*E5	R9	D2	R104	*N4	R135	*N5	R222	*L5	R309	*J4	R340	*G5
C13	C2	C125	*R5	C224	*K5	C323	*H5	C422	*F5	C521	*D5	CN19	C5	IC302	*J4	L205	*M5	L412	*E5	R10	D2	R105	*P4	R136	*M5	R223	*L5	R310	*H4	R341	*J5
C14	C1	C126	*P5	C225	*M5	C324	*G5	C423	*E5	C522	*C5	CN20	B5	IC303	*H4	L206	*M5	L501	*D4	R11	D2	R106	*P4	R137	*P5	R224	*K5	R311	*H4	R342	*J5
C15	B2	C127	*P5	C226	*M5	C325	*J5	C424	*E5	C523	*C5			IC304	*G4	L207	*L5	L502	*C4	R12	D2	R107	*N4	R138	*P5	R225	*M5	R312	*G4	R343	*H5
C16	C2	C128	*P5	C227	*L5	C326	*J5	C425	*G5	C524	*B5	CNB1	B1	IC401	*G4	L208	*L5	L503	*C4	R13	D2	R108	*M4	R139	*N5	R226	*L5	R313	*J4	R344	*G5
C17	A2	C129	*N5	C228	*L5	C327	*J5	C426	*G5	C525	*D5	CNF1	F1	IC402	*F4	L209	*L5	L504	*B4	R14	D2	R109	*P4	R140	*M5	R227	*L5	R314	*J4	R401	*G4
C18	A2	C130	*N5	C229	*L5	C328	*J5	C427	*F5	C526	*D5	CNM1	M1	IC403	*E4	L210	*L5	L505	*D5	R15	D1	R110	*P4	R141	*R5	R228	*K5	R315	*J4	R402	*F4
C51	C1	C131	*N5	C230	*L5	C329	*H5	C428	*F5	C527	*C5			IC404	*E4	L211	*K5	L506	*D5	R16	D1	R111	*N4	R142	*P5	R229	*M5	R316	*J4	R403	*E4
C101	*P4	C132	*M5	C231	*K5	C330	*H5	C429	*E5	C528	*C5	D1	B1	IC501	*D4	L212	*K5	L507	*D5	R17	D1	R112	*M4	R143	*N5	R230	*M5	R317	*H4	R404	*E4
C102	*P4	C201	*M4	C232	*K5	C331	*G5	C430	*E5	C529	*C5	D2	B2	IC502	*C4	L301	*J4	L508	*C5	R18	D1	R113	*P4	R144	*N5	R231	*L5	R318	*H4	R405	*G4
C103	*P4	C202	*M4	C301	*J4	C332	*G5	C431	*E5	C530	*C5	D3	C2	IC503	*C4	L302	*H4	L509	*C5	R19	D1	R114	*P4	R201	*M4	R232	*L5	R319	*G4	R406	*F4
C104	*P4	C203	*L4	C302	*J4	C401	*G4	C432	*E5	C531	*B5	D4	C2	IC504	*B4	L303	*H4	L510	*C5	R20	D1	R115	*P4	R202	*L4	R233	*L5	R320	*G4	R407	*E4
C105	*N4	C204	*L4	C303	*J4	C402	*G4	C501	*D4	C532	*B5					L304	*G4	L511	*B5	R21	D2	R116	*P4	R203	*L4	R234	*L5	R321	*J5	R408	*E4
C106	*N4	C205	*L4	C304	*J4	C403	*F4	C502	*D4			E1	E4	L1	B1	L305	*J5	L512	*B5	R22	D2	R117	*N4	R204	*K4	R235	*K5	R322	*J5	R409	*F4
C107	*N4	C206	*L4	C305	*H4	C404	*F4	C503	*C4	CN1	R5	E2	M4	L2	C2	L306	*J5			R23	C2	R118	*N4	R205	*M4	R236	*K5	R323	*H5	R410	*F4
C108	*M4	C207	*K4	C306	*H4	C405	*E4	C504	*C4	CN2	P5	E3	*B4	L3	B2	L307	*J5	PS1	A3	R24	C2	R119	*M4	R206	*L4	R237	*M5	R324	*G5	R411	*E4
C109	P4	C208	*K4	C307	*G4	C406	*E4	C505	*C4	CN3	N5	E4	*H4	L101	*P4	L308	*J5			R25	C2	R120	*M4	R207	*L4	R238	*L5	R325	*J5	R412	*D4
C110	P4	C209	M4	C308	*G4	C407	*E4	C506	*C4	CN4	N5	E5	*R4	L102	*P4	L309	*H5	Q1	D2	R26	C2	R121	*P5	R208	*K4	R239	*L5	R326	*J5	R413	*F4
C111	N4	C210	L4	C309	J4	C408	*E4	C507	*B4	CN5	M5			L103	*N4	L310	*H5	Q2	C2	R27	C2	R122	*P5	R209	*M4	R240	*K5	R327	*H5	R414	*F4
C112	N4	C211	L4	C310	J4	C409	G4	C508	*B4	CN6	M5	F1	A1	L104	*M4	L311	*G5	Q3	C2	R28	C2	R123	*N5	R210	*L4	R241	*M5	R328	*G5	R415	*F4
C113	*P4	C212	K4	C311	H4	C410	F4	C509	D4	CN7	L5			L105	*R5	L312	*G5	Q4	C2	R29	C2	R124	*N5	R211	*K4	R242	*L5	R329	*J5	R416	*F4

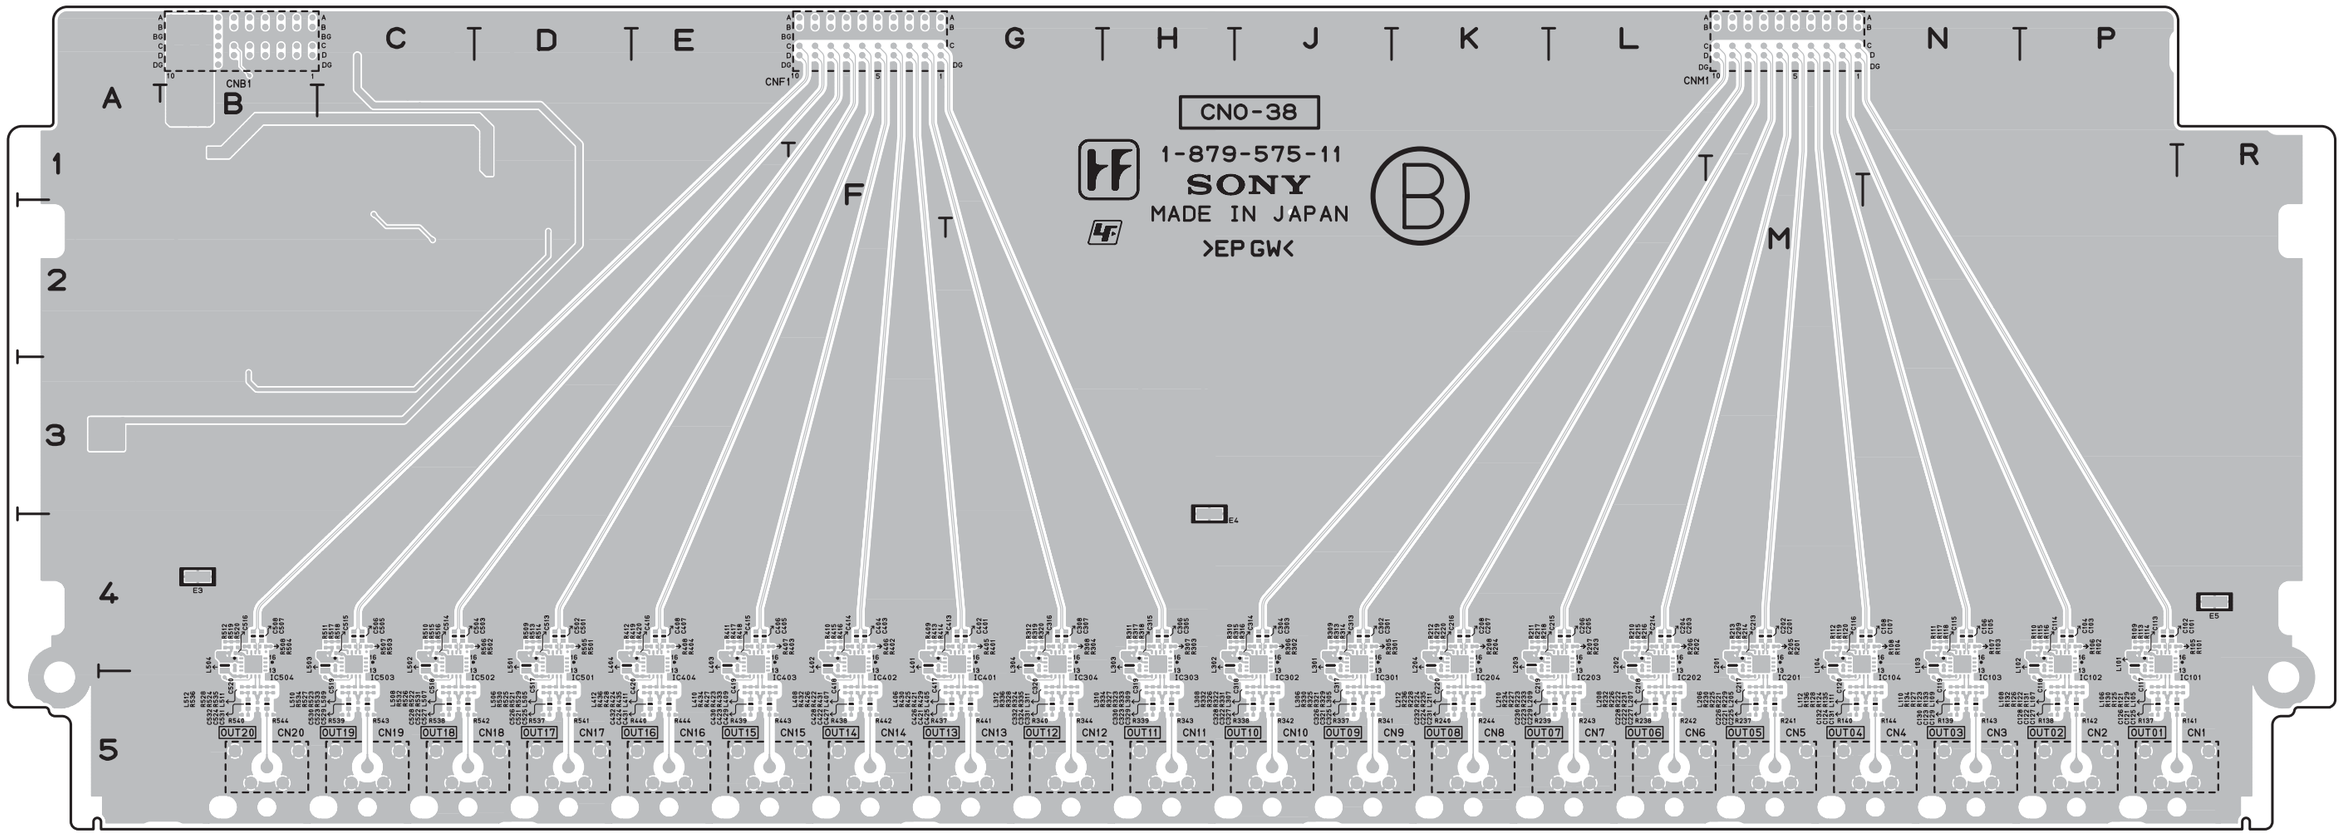

CNO-38/38A/38B -B SIDE-
SUFFIX: -11

R417	*E4	R504	*B4	R535	*B5
R418	*E4	R505	*D4	R536	*B5
R419	*E4	R506	*C4	R537	*D5
R420	*E4	R507	*C4	R538	*C5
R421	*G5	R508	*B4	R539	*C5
R422	*F5	R509	*D4	R540	*B5
R423	*E5	R510	*C4	R541	*D5
R424	*E5	R511	*C4	R542	*C5
R425	*G5	R512	*B4	R543	*C5
R426	*F5	R513	*D4	R544	*B5
R427	*E5	R514	*D4		
R428	*E5	R515	*C4	RB51	C1
R429	*G5	R516	*C4	RB52	C1
R430	*G5	R517	*C4		
R431	*F5	R518	*C4	TP1	B3
R432	*F5	R519	*B4		
R433	*E5	R520	*B4		
R434	*E5	R521	*D5		
R435	*E5	R522	*C5		
R436	*E5	R523	*C5		
R437	*G5	R524	*B5		
R438	*F5	R525	*D5		
R439	*E5	R526	*C5		
R440	*E5	R527	*C5		
R441	*G5	R528	*B5		
R442	*F5	R529	*D5		
R443	*E5	R530	*D5		
R444	*E5	R531	*C5		
R501	*D4	R532	*C5		
R502	*C4	R533	*C5		
R503	*C4	R534	*C5		

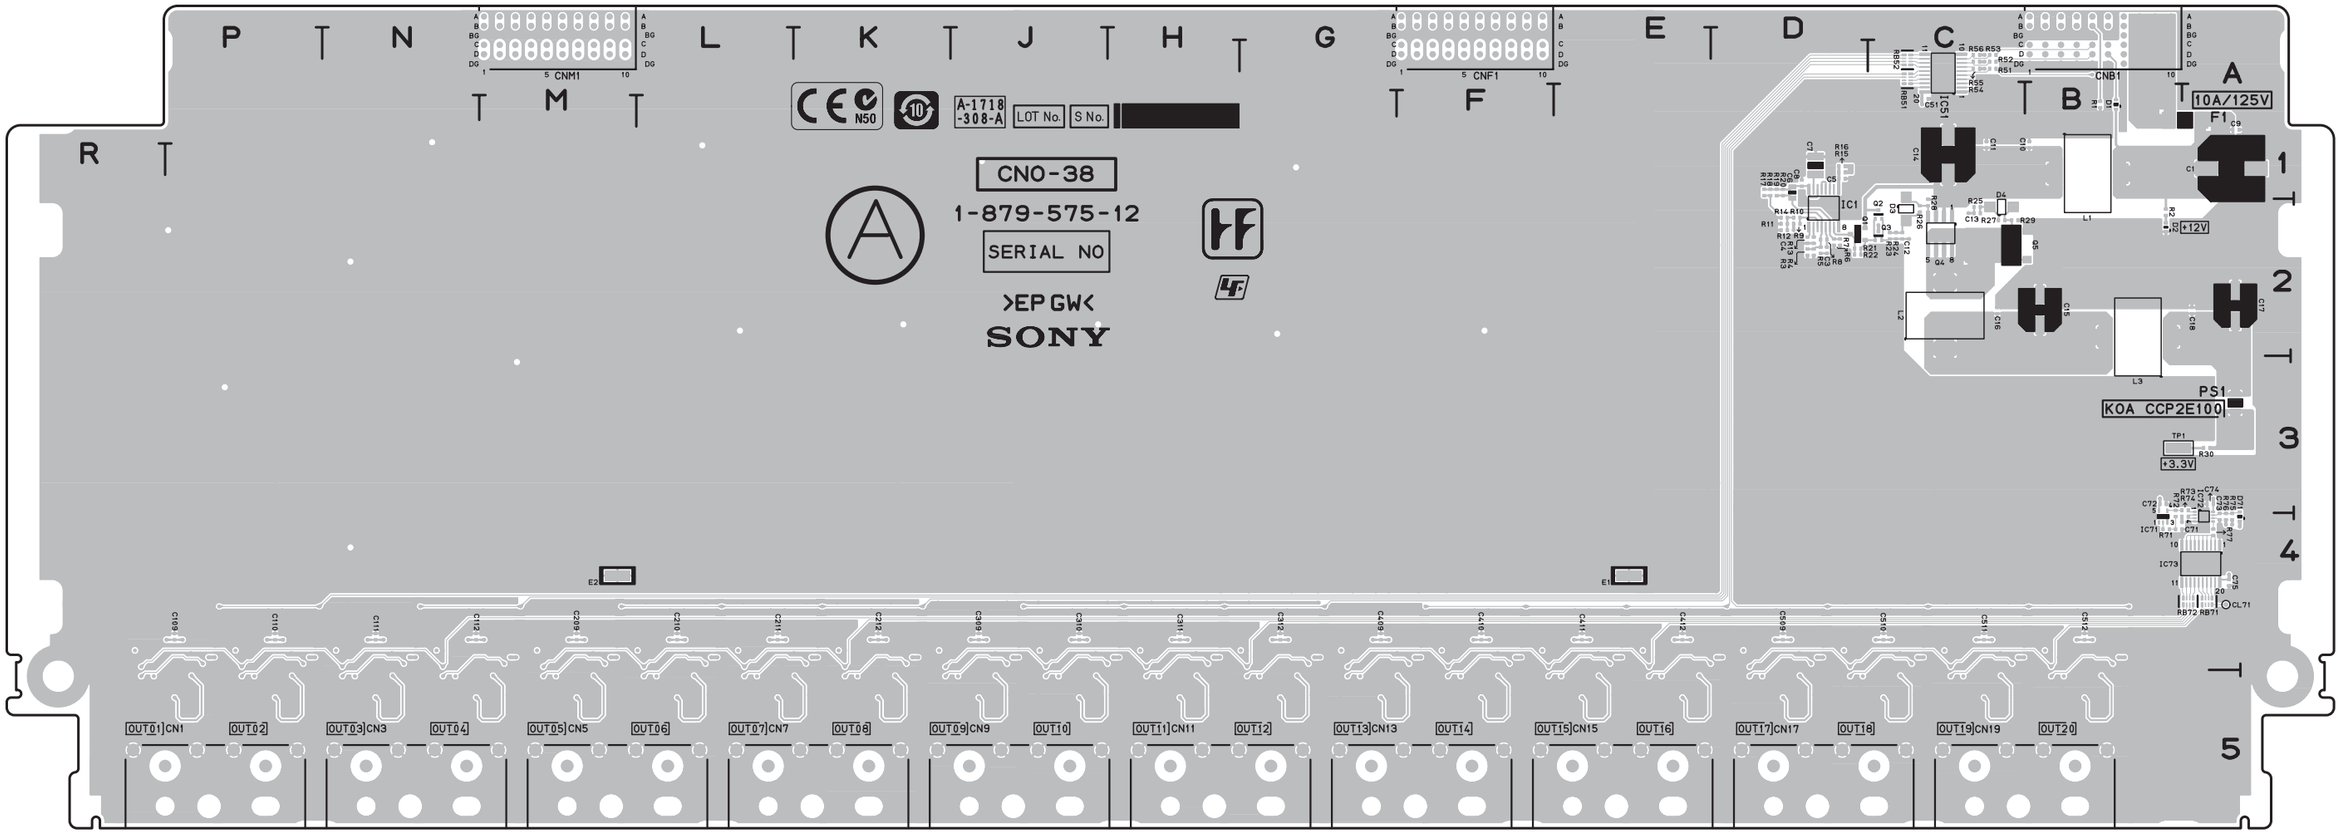

CNO-38/38A/38B -A SIDE-
SUFFIX: -12

```
------------------------------
CNO-38/38A/38B (1-879-575-12)
------------------------------
*:B SIDE
```

C1	A1	C109	P4	C204	*L4	C235	*L4	C330	*H5	C425	*G5	C520	*B5	CNF1	F1	IC202	*L4			L304	*G4	L511	*B5	R21	D2	R109	*P4	R140	*M5	R207	*L4
C3	D2	C110	P4	C205	*L4	C236	*K4	C331	*G5	C426	*G5	C521	*D5	CNM1	M1	IC203	*L4	L1	B1	L305	*J5	L512	*B5	R22	D2	R110	*P4	R141	*R5	R208	*K4
C4	D2	C111	N4	C206	*L4	C301	*J4	C332	*G5	C427	*F5	C522	*C5			IC204	*K4	L2	C2	L306	*J5			R23	C2	R111	*N4	R142	*P5	R209	*M4
C5	D1	C112	N4	C207	*K4	C302	*J4	C333	*K4	C428	*F5	C523	*C5	D1	B1	IC205	*M4	L3	B2	L307	*J5	PS1	A3	R24	C2	R112	*M4	R143	*N5	R210	*L4
C6	D1	C113	*P4	C208	*K4	C303	*J4	C334	*J4	C429	*E5	C524	*B5	D2	B2	IC206	*L4	L101	*P4	L308	*J5			R25	C2	R113	*P4	R144	*N5	R211	*K4
C7	D1	C114	*P4	C209	M4	C304	*J4	C335	*H4	C430	*E5	C525	*D5	D3	C2	IC207	*L4	L102	*P4	L309	*H5	Q1	D2	R26	C2	R114	*P4	R145	*R4	R212	*K4
C8	D1	C115	*N4	C210	L4	C305	*H4	C336	*G4	C431	*E5	C526	*D5	D4	C2	IC208	*K4	L103	*N4	L310	*H5	Q2	C2	R27	C2	R115	*P4	R146	*P4	R213	*M4
C9	A1	C116	*M4	C211	L4	C306	*H4	C401	*G4	C432	*E5	C527	*C5	D71	A4	IC301	*J4	L104	*M4	L311	*G5	Q3	C2	R28	C2	R116	*P4	R147	*N4	R214	*M4
C10	B1	C117	*P5	C212	K4	C307	*G4	C402	*G4	C433	*G4	C528	*C5			IC302	*J4	L105	*R5	L312	*G5	Q4	C2	R29	C2	R117	*N4	R148	*N4	R215	*L4
C11	C1	C118	*P5	C213	*M4	C308	*G4	C403	*F4	C434	*F4	C529	*C5	E1	E4	IC303	*H4	L106	*P5	L401	*F4	Q5	C2	R30	A3	R118	*N4	R149	*R4	R216	*L4
C12	C2	C119	*N5	C214	*L4	C309	J4	C404	*F4	C435	*F4	C530	*C5	E2	M4	IC304	*G4	L107	*P5	L402	*F4			R51	C1	R119	*M4	R150	*P4	R217	*K4
C13	C2	C120	*M5	C215	*K4	C310	J4	C405	*E4	C436	*E4	C531	*B5	E3	*B4	IC305	*K4	L108	*P5	L403	*E4	R1	B1	R52	C1	R120	*M4	R151	*R4	R218	*K4
C14	C1	C121	*P5	C216	*K4	C311	H4	C406	*E4	C501	*D4	C532	*B5	E4	*H4	IC306	*J4	L109	*N5	L404	*D4	R2	B2	R53	C1	R121	*P5	R152	*P4	R219	*K4
C15	B2	C122	*P5	C217	*M5	C312	G4	C407	*E4	C502	*D4	C533	*D4	E5	*R4	IC307	*H4	L110	*N5	L405	*G5	R3	D2	R54	C1	R122	*P5	R153	*P4	R220	*K4
C16	C2	C123	*N5	C218	*L5	C313	*J4	C408	*E4	C503	*C4	C534	*D4			IC308	*G4	L111	*N5	L406	*G5	R4	D2	R55	C1	R123	*N5	R154	*P4	R221	*M5
C17	A2	C124	*N5	C219	*K5	C314	*H4	C409	G4	C504	*C4	C535	*C4	F1	A1	IC401	*G4	L112	*M5	L407	*F5	R5	D2	R56	C1	R124	*N5	R155	*P4	R222	*L5
C18	A2	C125	*R5	C220	*K5	C315	*H4	C410	F4	C505	*C4	C536	*B4			IC402	*F4	L201	*M4	L408	*F5	R6	D2	R71	B4	R125	*P5	R156	*P4	R223	*L5
C51	C1	C126	*P5	C221	*M5	C316	*G4	C411	E4	C506	*C4			IC1	D2	IC403	*E4	L202	*L4	L409	*E5	R7	D2	R72	B4	R126	*P5	R157	*N4	R224	*K5
C71	B4	C127	*P5	C222	*L5	C317	*J5	C412	E4	C507	*B4	CL71	A4	IC51	C1	IC404	*E4	L203	*K4	L410	*E5	R8	D2	R73	A3	R127	*N5	R158	*N4	R225	*M5
C72	B3	C128	*P5	C223	*L5	C318	*J5	C413	*F4	C508	*B4			IC71	B4	IC405	*G4	L204	*K4	L411	*E5	R9	D2	R74	A4	R128	*N5	R159	*N4	R226	*L5
C73	A4	C129	*N5	C224	*K5	C319	*H5	C414	*F4	C509	D4	CN1	P5	IC72	A4	IC406	*F4	L205	*M5	L412	*E5	R10	D2	R75	A4	R129	*R5	R160	*N4	R227	*L5
C74	A3	C130	*N5	C225	*M5	C320	*G5	C415	*E4	C510	C4	CN3	N5	IC73	A4	IC407	*F4	L206	*M5	L501	*D4	R11	D2	R76	A4	R130	*P5	R161	*N4	R228	*K5
C75	A4	C131	*N5	C226	*M5	C321	*J5	C416	*D4	C511	C4	CN5	M5	IC101	*P4	IC408	*E4	L207	*L5	L502	*C4	R12	D2	R77	A4	R131	*P5	R162	*M4	R229	*M5
C101	*P4	C132	*M5	C227	*L5	C322	*J5	C417	*F5	C512	B4	CN7	K5	IC102	*P4	IC501	*D4	L208	*L5	L503	*C4	R13	D2	R101	*P4	R132	*P5	R163	*N4	R230	*M5
C102	*P4	C133	*R4	C228	*L5	C323	*H5	C418	*F5	C513	*D4	CN9	J5	IC103	*N4	IC502	*C4	L209	*L5	L504	*B4	R14	D2	R102	*P4	R133	*N5	R164	*M4	R231	*L5
C103	*P4	C134	*P4	C229	*L5	C324	*G5	C419	*E5	C514	*C4	CN11	H5	IC104	*M4	IC503	*C4	L210	*L5	L505	*D5	R15	D1	R103	*N4	R134	*N5	R201	*M4	R232	*L5
C104	*P4	C135	*N4	C230	*L5	C325	*J5	C420	*E5	C515	*C4	CN13	F5	IC105	*R4	IC504	*B4	L211	*K5	L506	*D5	R16	D1	R104	*N4	R135	*N5	R202	*L4	R233	*L5
C105	*N4	C136	*N4	C231	*K5	C326	*J5	C421	*G5	C516	*B4	CN15	E5	IC106	*P4	IC505	*D4	L212	*K5	L507	*D5	R17	D1	R105	*P4	R136	*M5	R203	*L4	R234	*L5
C106	*N4	C201	*M4	C232	*K5	C327	*J5	C422	*F5	C517	*D5	CN17	D5	IC107	*N4	IC506	*D4	L301	*J4	L508	*C5	R18	D1	R106	*P4	R137	*P5	R204	*K4	R235	*K5
C107	*N4	C202	*M4	C233	*M4	C328	*J5	C423	*E5	C518	*C5	CN19	C5	IC108	*N4	IC507	*C4	L302	*H4	L509	*C5	R19	D1	R107	*N4	R138	*P5	R205	*M4	R236	*K5
C108	*M4	C203	*L4	C234	*L4	C329	*H5	C424	*E5	C519	*C5	CNB1	B1	IC201	*M4	IC508	*B4	L303	*H4	L510	*C5	R20	D1	R108	*M4	R139	*N5	R206	*L4	R237	*M5

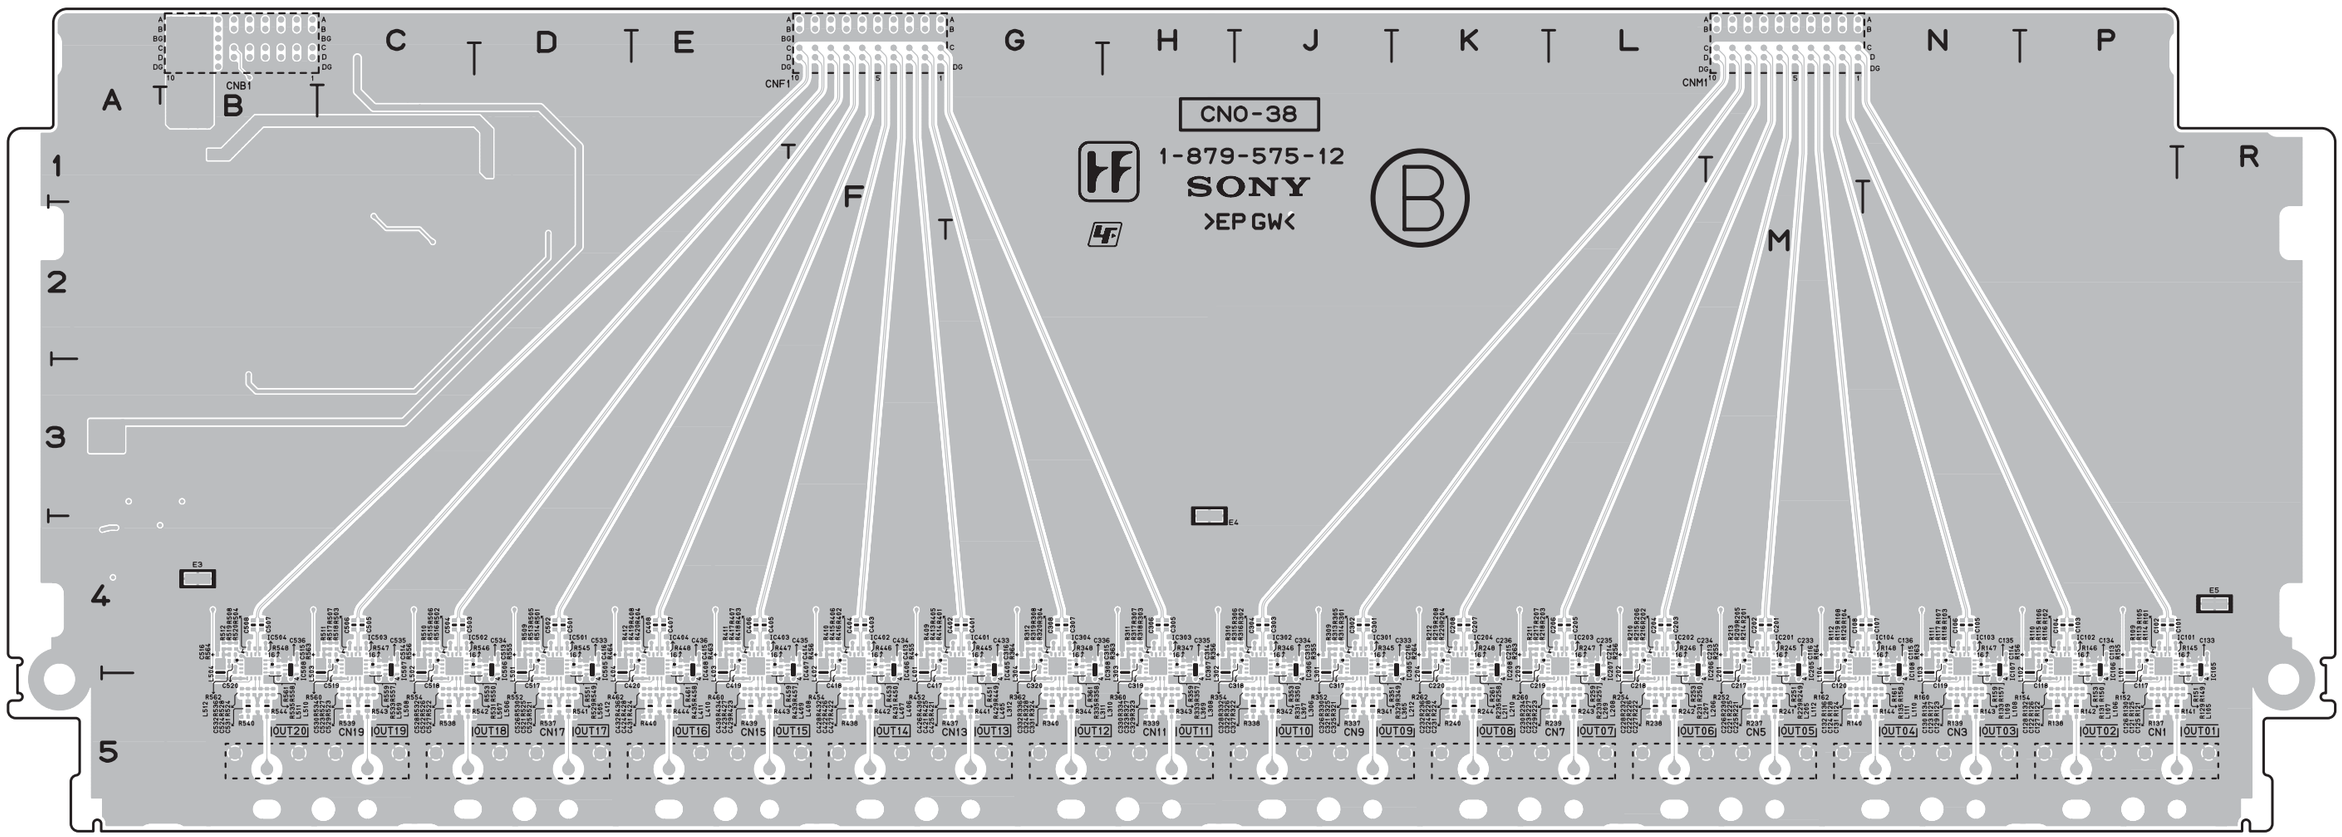

CNO-38/38A/38B -B SIDE-
SUFFIX: -12

R238	*L5	R305	*J4	R336	*G5	R403	*E4	R434	*E5	R501	*D4	R532	*C5	R563	*C4
R239	*L5	R306	*J4	R337	*J5	R404	*E4	R435	*E5	R502	*C4	R533	*C5	R564	*B4
R240	*K5	R307	*H4	R338	*J5	R405	*G4	R436	*E5	R503	*C4	R534	*C5		
R241	*M5	R308	*G4	R339	*H5	R406	*F4	R437	*G5	R504	*B4	R535	*B5	RB51	C1
R242	*L5	R309	*J4	R340	*G5	R407	*E4	R438	*F5	R505	*D4	R536	*B5	RB52	C1
R243	*L5	R310	*H4	R341	*J5	R408	*E4	R439	*E5	R506	*C4	R537	*D5	RB71	A4
R244	*K5	R311	*H4	R342	*J5	R409	*F4	R440	*E5	R507	*C4	R538	*C5	RB72	A4
R245	*M4	R312	*G4	R343	*H5	R410	*F4	R441	*G5	R508	*B4	R539	*C5		
R246	*L4	R313	*J4	R344	*G5	R411	*E4	R442	*F5	R509	*D4	R540	*B5	TP1	B3
R247	*L4	R314	*J4	R345	*J4	R412	*D4	R443	*E5	R510	*C4	R541	*D5		
R248	*K4	R315	*J4	R346	*J4	R413	*F4	R444	*E5	R511	*C4	R542	*C5		
R249	*M4	R316	*J4	R347	*H4	R414	*F4	R445	*G4	R512	*B4	R543	*C5		
R250	*L4	R317	*H4	R348	*G4	R415	*F4	R446	*F4	R513	*D4	R544	*B5		
R251	*M4	R318	*H4	R349	*J4	R416	*F4	R447	*E4	R514	*D4	R545	*D4		
R252	*M4	R319	*G4	R350	*J4	R417	*E4	R448	*E4	R515	*C4	R546	*D4		
R253	*L4	R320	*G4	R351	*J4	R418	*E4	R449	*G4	R516	*C4	R547	*C4		
R254	*L4	R321	*J5	R352	*J4	R419	*E4	R450	*F4	R517	*C4	R548	*B4		
R255	*M4	R322	*J5	R353	*J4	R420	*E4	R451	*G4	R518	*C4	R549	*D4		
R256	*L4	R323	*H5	R354	*J4	R421	*G5	R452	*F4	R519	*B4	R550	*D4		
R257	*L4	R324	*G5	R355	*J4	R422	*F5	R453	*F4	R520	*B4	R551	*D4		
R258	*K4	R325	*J5	R356	*J4	R423	*E5	R454	*F4	R521	*D5	R552	*D4		
R259	*L4	R326	*J5	R357	*H4	R424	*E5	R455	*F4	R522	*C5	R553	*C4		
R260	*K4	R327	*H5	R358	*G4	R425	*G5	R456	*F4	R523	*C5	R554	*C4		
R261	*K4	R328	*G5	R359	*H4	R426	*F5	R457	*E4	R524	*B5	R555	*D4		
R262	*K4	R329	*J5	R360	*H4	R427	*E5	R458	*E4	R525	*D5	R556	*C4		
R263	*K4	R330	*J5	R361	*G4	R428	*E5	R459	*E4	R526	*C5	R557	*C4		
R264	*K4	R331	*J5	R362	*G4	R429	*G5	R460	*E4	R527	*C5	R558	*B4		
R301	*J4	R332	*J5	R363	*H4	R430	*G5	R461	*E4	R528	*B5	R559	*C4		
R302	*J4	R333	*H5	R364	*G4	R431	*F5	R462	*E4	R529	*D5	R560	*C4		
R303	*H4	R334	*H5	R401	*G4	R432	*F5	R463	*E4	R530	*D5	R561	*B4		
R304	*G4	R335	*G5	R402	*F4	R433	*E5	R464	*E4	R531	*C5	R562	*B4		

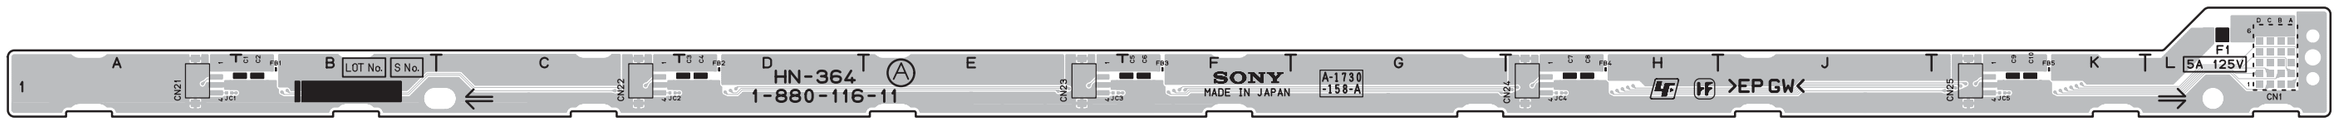

HN-364 -A SIDE-
SUFFIX: -11

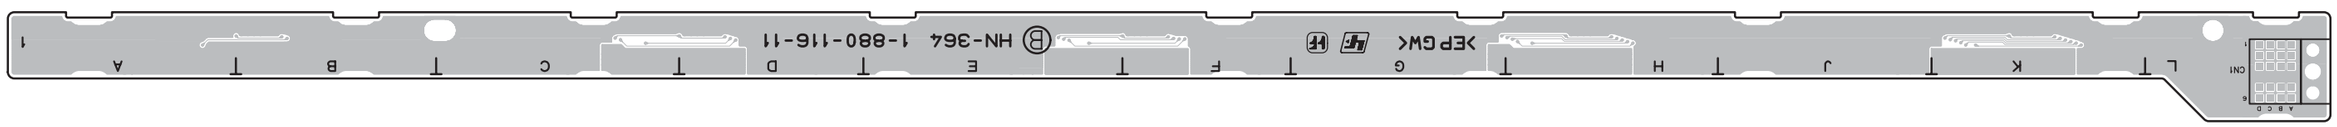

HN-364 -B SIDE-
SUFFIX: -11

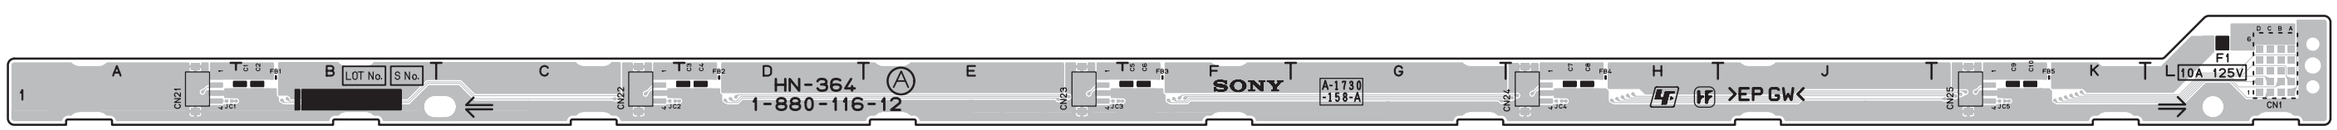

HN-364 -A SIDE-
SUFFIX: -12

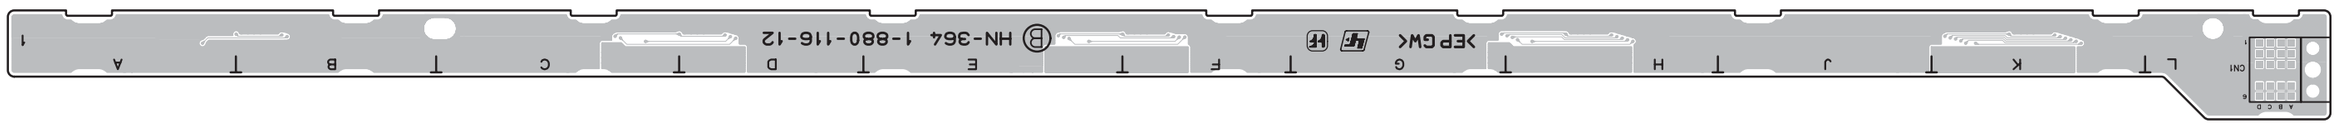

HN-364 -B SIDE-
SUFFIX: -12

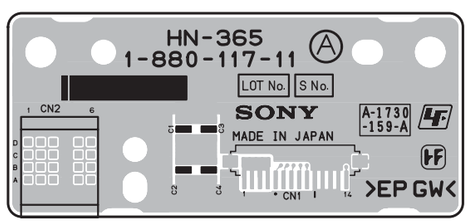

HN-365 -A SIDE-
SUFFIX: -11

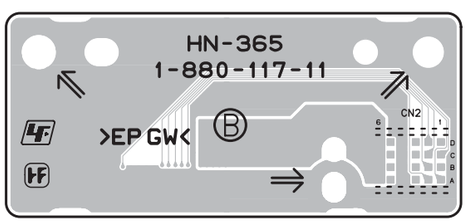

HN-365 -B SIDE-
SUFFIX: -11



HN-366 -A SIDE-
SUFFIX: -11

HN-366 -B SIDE-
SUFFIX: -11

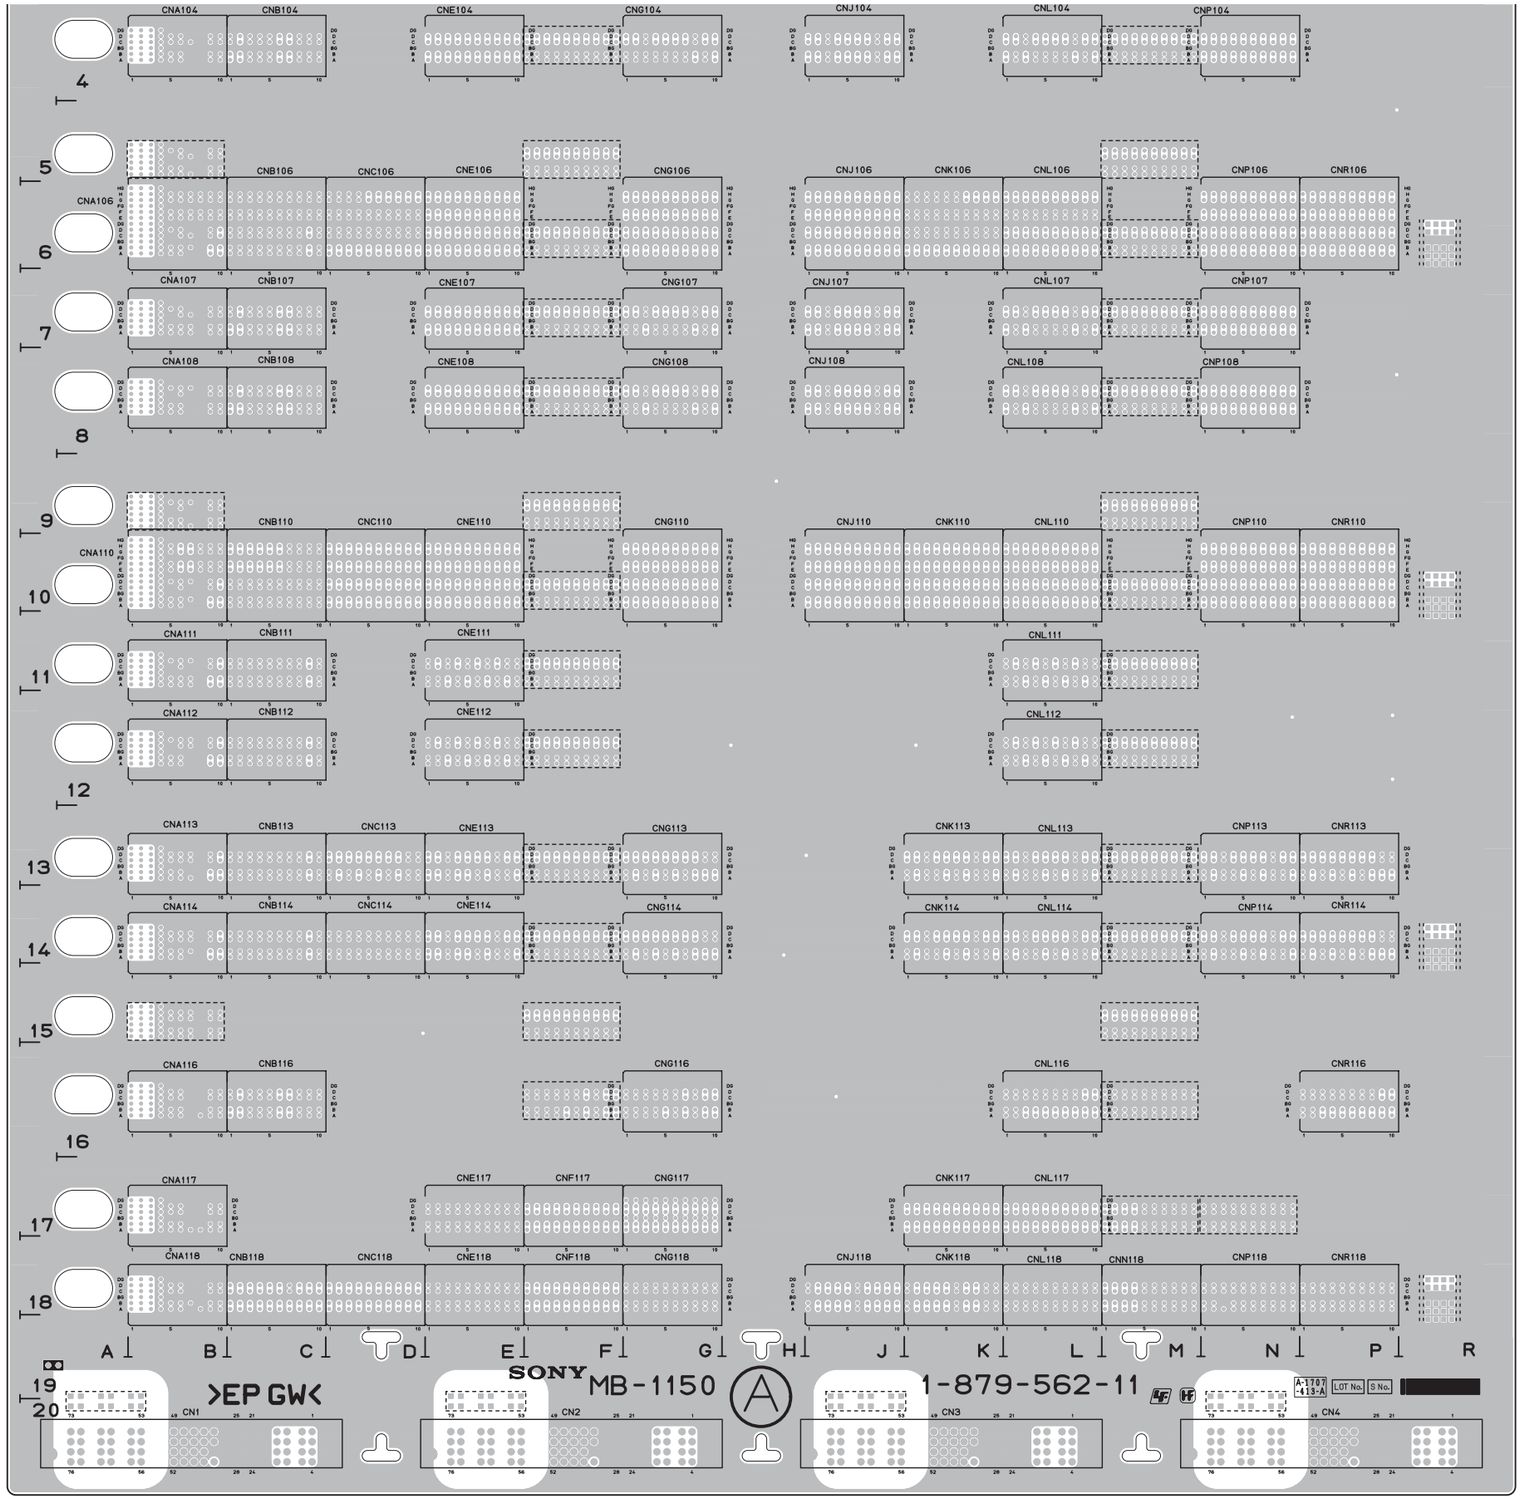

MB-1150 -A SIDE-
SUFFIX: -11

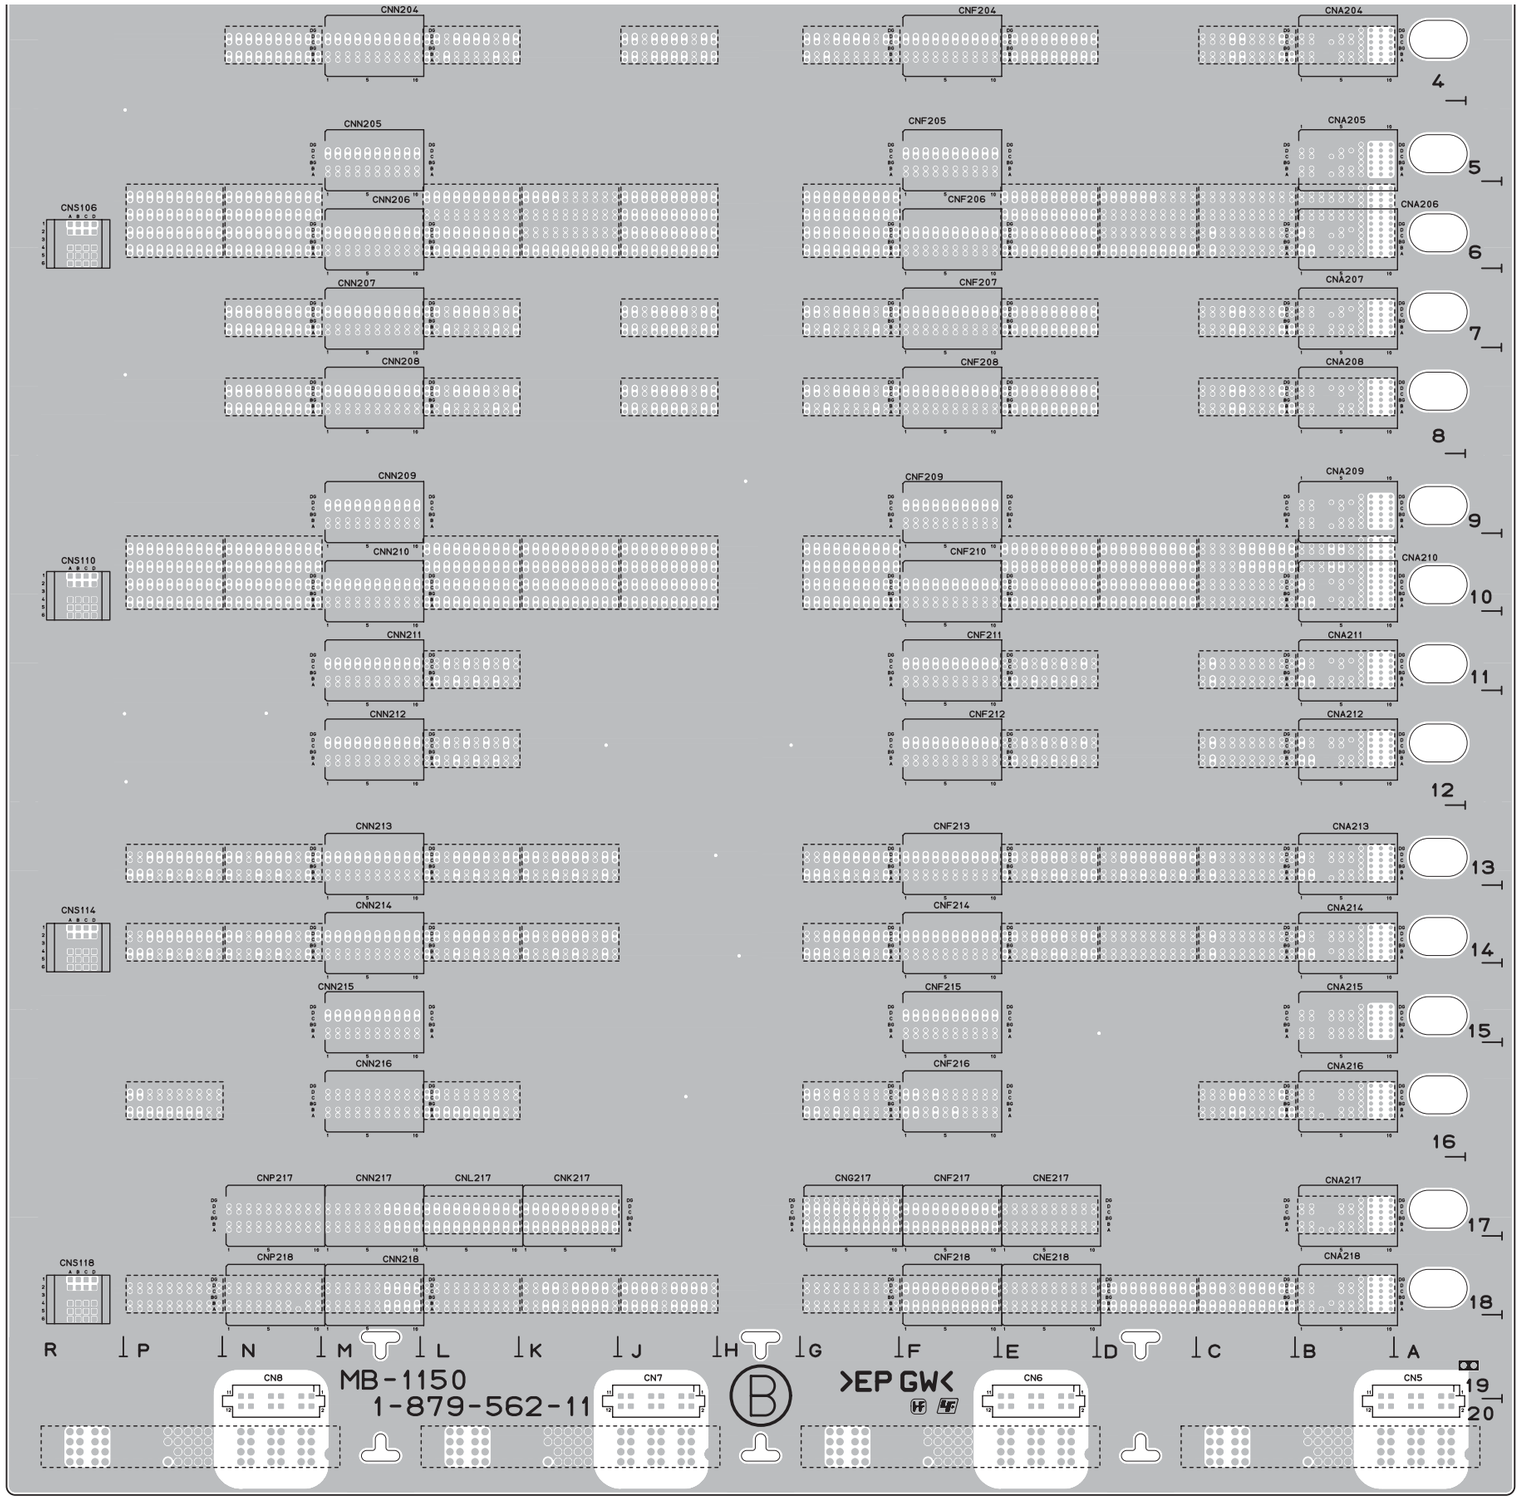

MB-1150 (1-879-562-11)

*:B SIDE

CN1	C20	CNF208	*F8	CNP113	N13
CN2	G20	CNF209	*F9	CNP114	N14
CN3	L20	CNF210	*F10	CNP118	N18
CN4	R20	CNF211	*F11	CNP217	*N17
CN5	*A19	CNF212	*F12	CNP218	*N18
CN6	*E19	CNF213	*F13		
CN7	*J19	CNF214	*F14	CNR103	P3
CN8	*N19	CNF215	*F15	CNR106	P6
		CNF216	*F16	CNR110	P10
CNA101	B1	CNF217	*F17	CNR113	P13
CNA102	B2	CNF218	*F18	CNR114	P14
CNA103	B3			CNR116	P16
CNA104	B4	CNG101	G1	CNR118	P18
CNA106	B6	CNG102	G2		
CNA107	B7	CNG103	G3	CNS102	*R2
CNA108	B8	CNG104	G4	CNS106	*R6
CNA110	B10	CNG106	G6	CNS110	*R10
CNA111	B11	CNG107	G7	CNS114	*R14
CNA112	B12	CNG108	G8	CNS118	*R18
CNA113	B13	CNG110	G10		
CNA114	B14	CNG113	G13		
CNA116	B16	CNG114	G14		
CNA117	B17	CNG116	G16		
CNA118	B18	CNG117	G17		
CNA201	*B1	CNG118	G18		
CNA202	*B2	CNG217	*G17		
CNA203	*B3				
CNA204	*B4	CNJ101	J1		
CNA205	*B5	CNJ102	J2		
CNA206	*B6	CNJ103	J3		
CNA207	*B7	CNJ104	J4		
CNA208	*B8	CNJ106	J6		
CNA209	*B9	CNJ107	J7		
CNA210	*B10	CNJ108	J8		
CNA211	*B11	CNJ110	J10		
CNA212	*B12	CNJ118	J18		
CNA213	*B13				
CNA214	*B14	CNK103	K3		
CNA215	*B15	CNK106	K6		
CNA216	*B16	CNK110	K10		
CNA217	*B17	CNK113	K13		
CNA218	*B18	CNK114	K14		
		CNK117	K17		
CNB101	C1	CNK118	K18		
CNB102	C2	CNK217	*K17		
CNB103	C3				
CNB104	C4	CNL101	L1		
CNB106	C6	CNL102	L2		
CNB107	C7	CNL103	L3		
CNB108	C8	CNL104	L4		
CNB110	C10	CNL106	L6		
CNB111	C11	CNL107	L7		
CNB112	C12	CNL108	L8		
CNB113	C13	CNL110	L10		
CNB114	C14	CNL111	L11		
CNB116	C16	CNL112	L12		
CNB118	C18	CNL113	L13		
		CNL114	L14		
CNC103	D3	CNL116	L16		
CNC106	D6	CNL117	L17		
CNC110	D10	CNL118	L18		
CNC113	D13	CNL217	*L17		
CNC114	D14				
CNC118	D18	CNN118	M18		
		CNN201	*M1		
CNE101	E1	CNN202	*M2		
CNE102	E2	CNN203	*M3		
CNE103	E3	CNN204	*M4		
CNE104	E4	CNN205	*M5		
CNE106	E6	CNN206	*M6		
CNE107	E7	CNN207	*M7		
CNE108	E8	CNN208	*M8		
CNE110	E10	CNN209	*M9		
CNE111	E11	CNN210	*M10		
CNE112	E12	CNN211	*M11		
CNE113	E13	CNN212	*M12		
CNE114	E14	CNN213	*M13		
CNE117	E17	CNN214	*M14		
CNE118	E18	CNN215	*M15		
CNE217	*E17	CNN216	*M16		
CNE218	*E18	CNN217	*M17		
		CNN218	*M18		
CNF117	F17				
CNF118	F18	CNP101	N1		
CNF201	*F1	CNP102	N2		
CNF202	*F2	CNP103	N3		
CNF203	*F3	CNP104	N4		
CNF204	*F4	CNP106	N6		
CNF205	*F5	CNP107	N7		
CNF206	*F6	CNP108	N8		
CNF207	*F7	CNP110	N10		

MB-1150 -B SIDE-
SUFFIX: -11

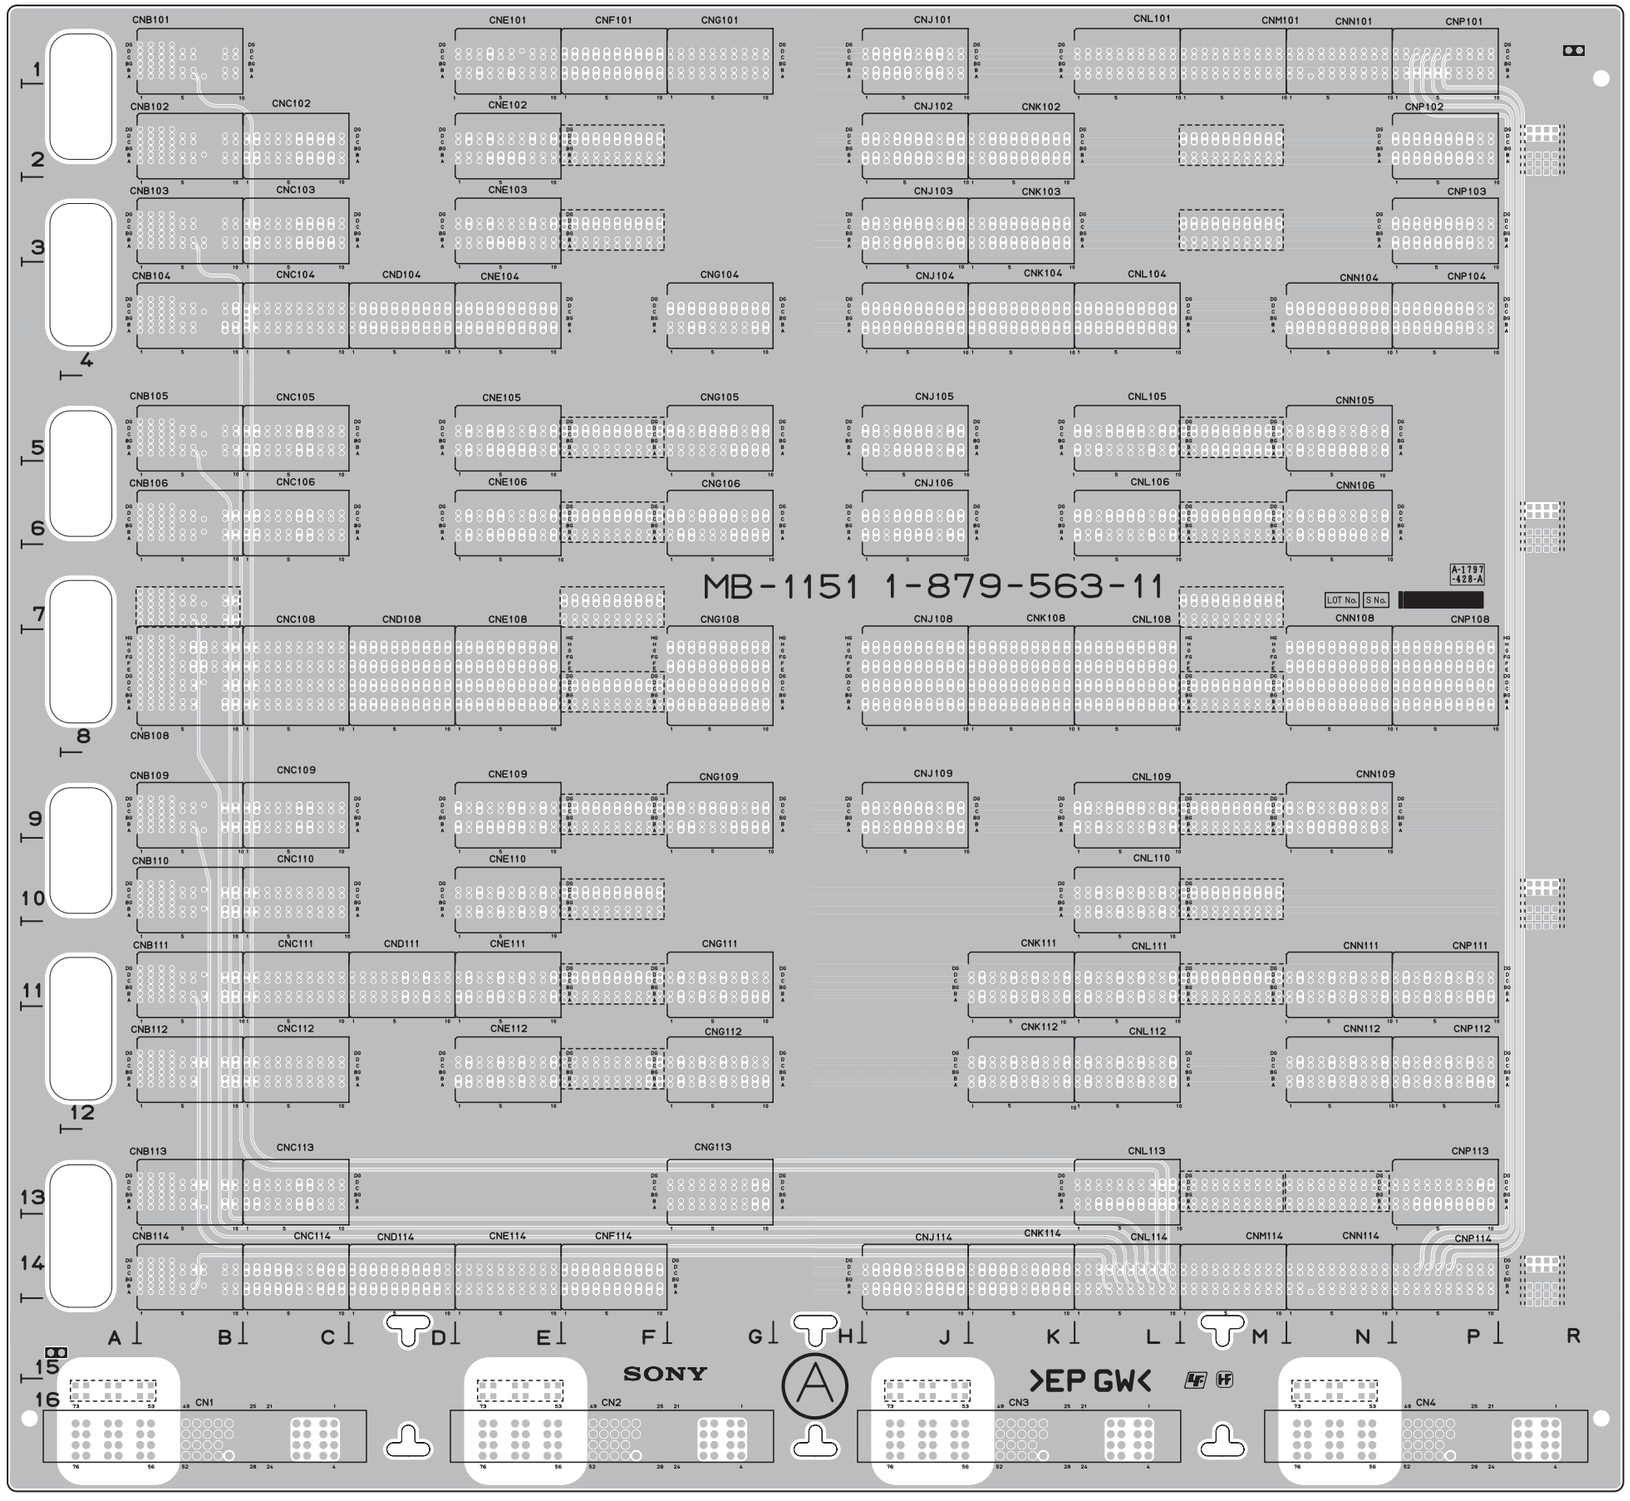

MB-1151 -A SIDE-
SUFFIX: -11

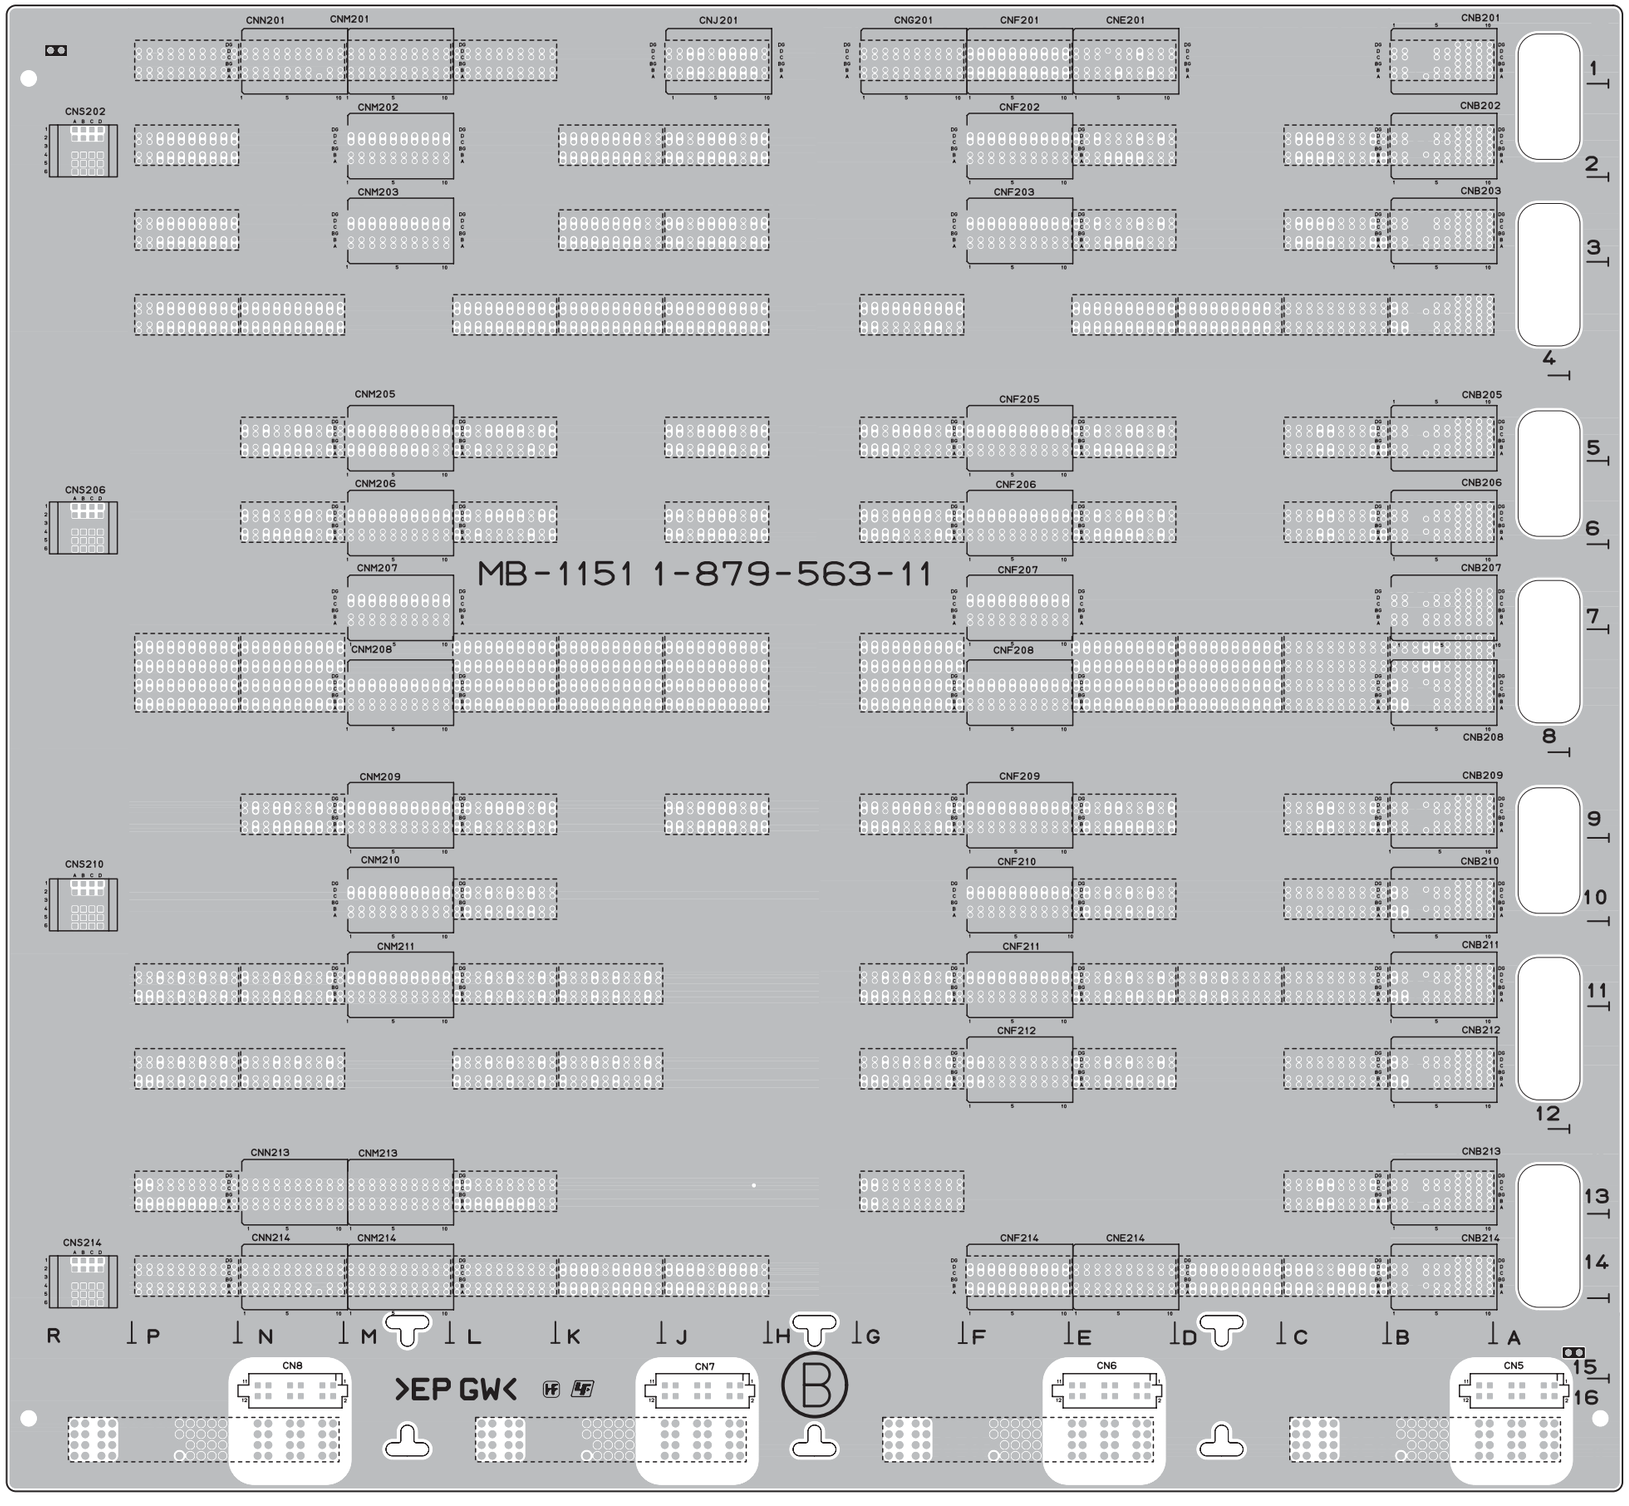

MB-1151 -B SIDE-
SUFFIX: -11

MB-1151 (1-879-563-11)
---
*:B SIDE

CN1	C16	CNJ104	J4
CN2	G16	CNJ105	J5
CN3	L16	CNJ106	J6
CN4	R16	CNJ108	J8
CN5	*A16	CNJ109	J9
CN6	*E16	CNJ114	J14
CN7	*J16	CNJ201	*J1
CN8	*N16	CNK102	K2
CNB101	B1	CNK103	K3
CNB102	B2	CNK104	K4
CNB103	B3	CNK108	K8
CNB104	B4	CNK111	K11
CNB105	B5	CNK112	K12
CNB106	B6	CNK114	K14
CNB108	B8	CNL101	L1
CNB109	B9	CNL104	L4
CNB110	B10	CNL105	L5
CNB111	B11	CNL106	L6
CNB112	B12	CNL108	L8
CNB113	B13	CNL109	L9
CNB114	B14	CNL110	L10
CNB201	*B1	CNL111	L11
CNB202	*B2	CNL112	L12
CNB203	*B3	CNL113	L13
CNB205	*B5	CNL114	L14
CNB206	*B6	CNM101	M1
CNB207	*B7	CNM114	M14
CNB208	*B8	CNM201	*M1
CNB209	*B9	CNM202	*M2
CNB210	*B10	CNM203	*M3
CNB211	*B11	CNM205	*M5
CNB212	*B12	CNM206	*M6
CNB213	*B13	CNM207	*M7
CNB214	*B14	CNM208	*M8
CNC102	C2	CNM209	*M9
CNC103	C3	CNM210	*M10
CNC104	C4	CNM211	*M11
CNC105	C5	CNM213	*M13
CNC106	C6	CNM214	*M14
CNC108	C8	CNN101	N1
CNC109	C9	CNN104	N4
CNC110	C10	CNN105	N5
CNC111	C11	CNN106	N6
CNC112	C12	CNN108	N8
CNC113	C13	CNN109	N9
CNC114	C14	CNN111	N11
CND104	D4	CNN112	N12
CND108	D8	CNN114	N14
CND111	D11	CNN201	*N1
CND114	D14	CNN213	*N13
CNE101	E1	CNN214	*N14
CNE102	E2	CNP101	P1
CNE103	E3	CNP102	P2
CNE104	E4	CNP103	P3
CNE105	E5	CNP104	P4
CNE106	E6	CNP108	P8
CNE108	E8	CNP111	P11
CNE109	E9	CNP112	P12
CNE110	E10	CNP113	P13
CNE111	E11	CNP114	P14
CNE112	E12	CNS202	*R2
CNE114	E14	CNS206	*R6
CNE201	*E1	CNS210	*R10
CNE214	*E14	CNS214	*R14
CNF101	F1		
CNF114	F14		
CNF201	*F1		
CNF202	*F2		
CNF203	*F3		
CNF205	*F5		
CNF206	*F6		
CNF207	*F7		
CNF208	*F8		
CNF209	*F9		
CNF210	*F10		
CNF211	*F11		
CNF212	*F12		
CNF214	*F14		
CNG101	G1		
CNG104	G4		
CNG105	G5		
CNG106	G6		
CNG108	G8		
CNG109	G9		
CNG111	G11		
CNG112	G12		
CNG113	G13		
CNG201	*G1		
CNJ101	J1		
CNJ102	J2		
CNJ103	J3		

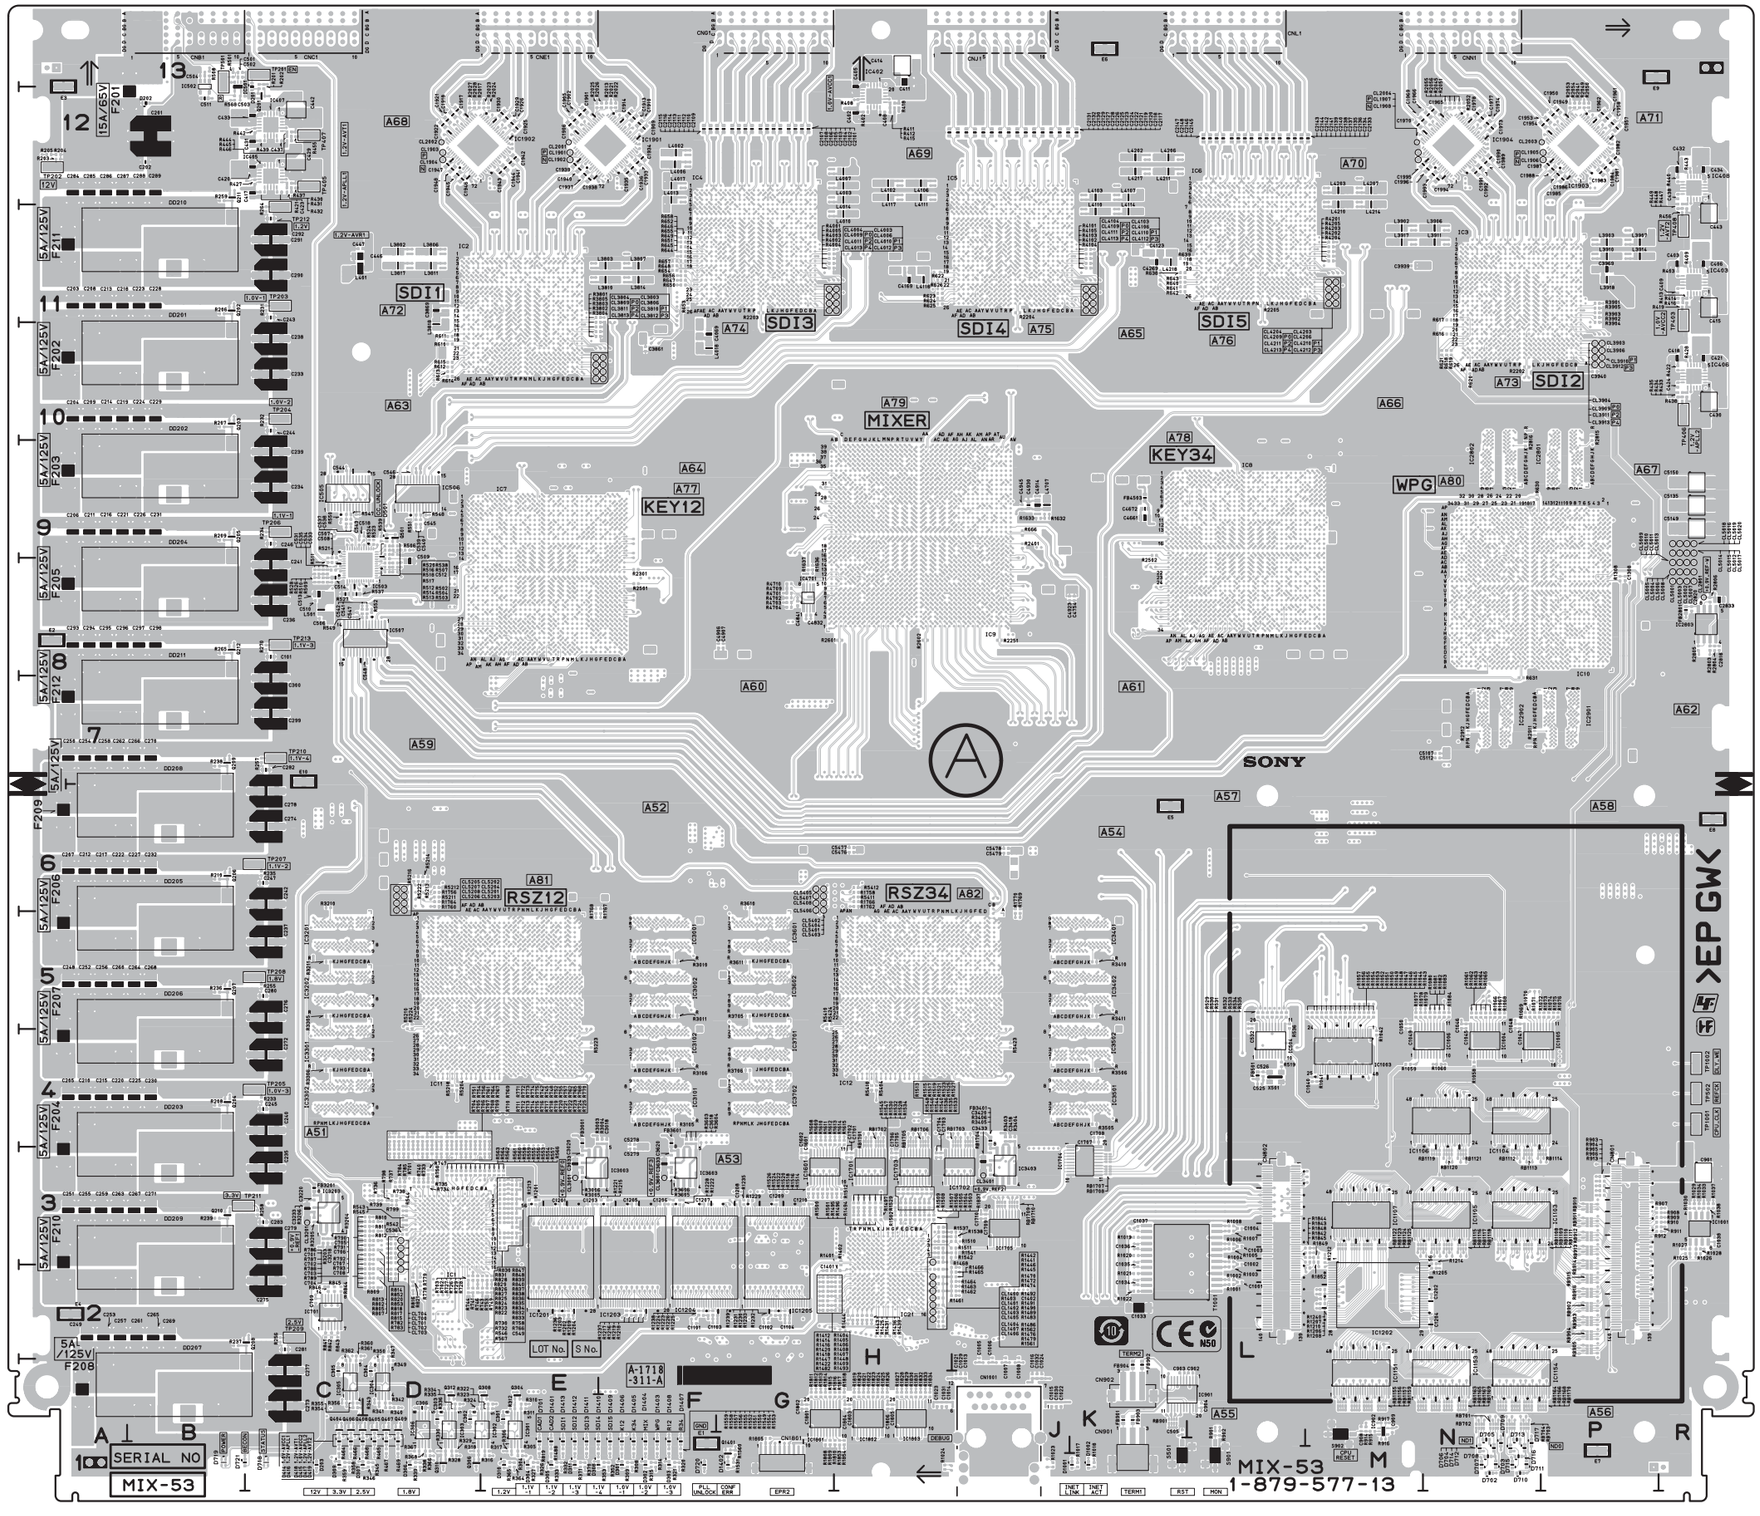

MIX-53 -A SIDE-
SUFFIX: -13

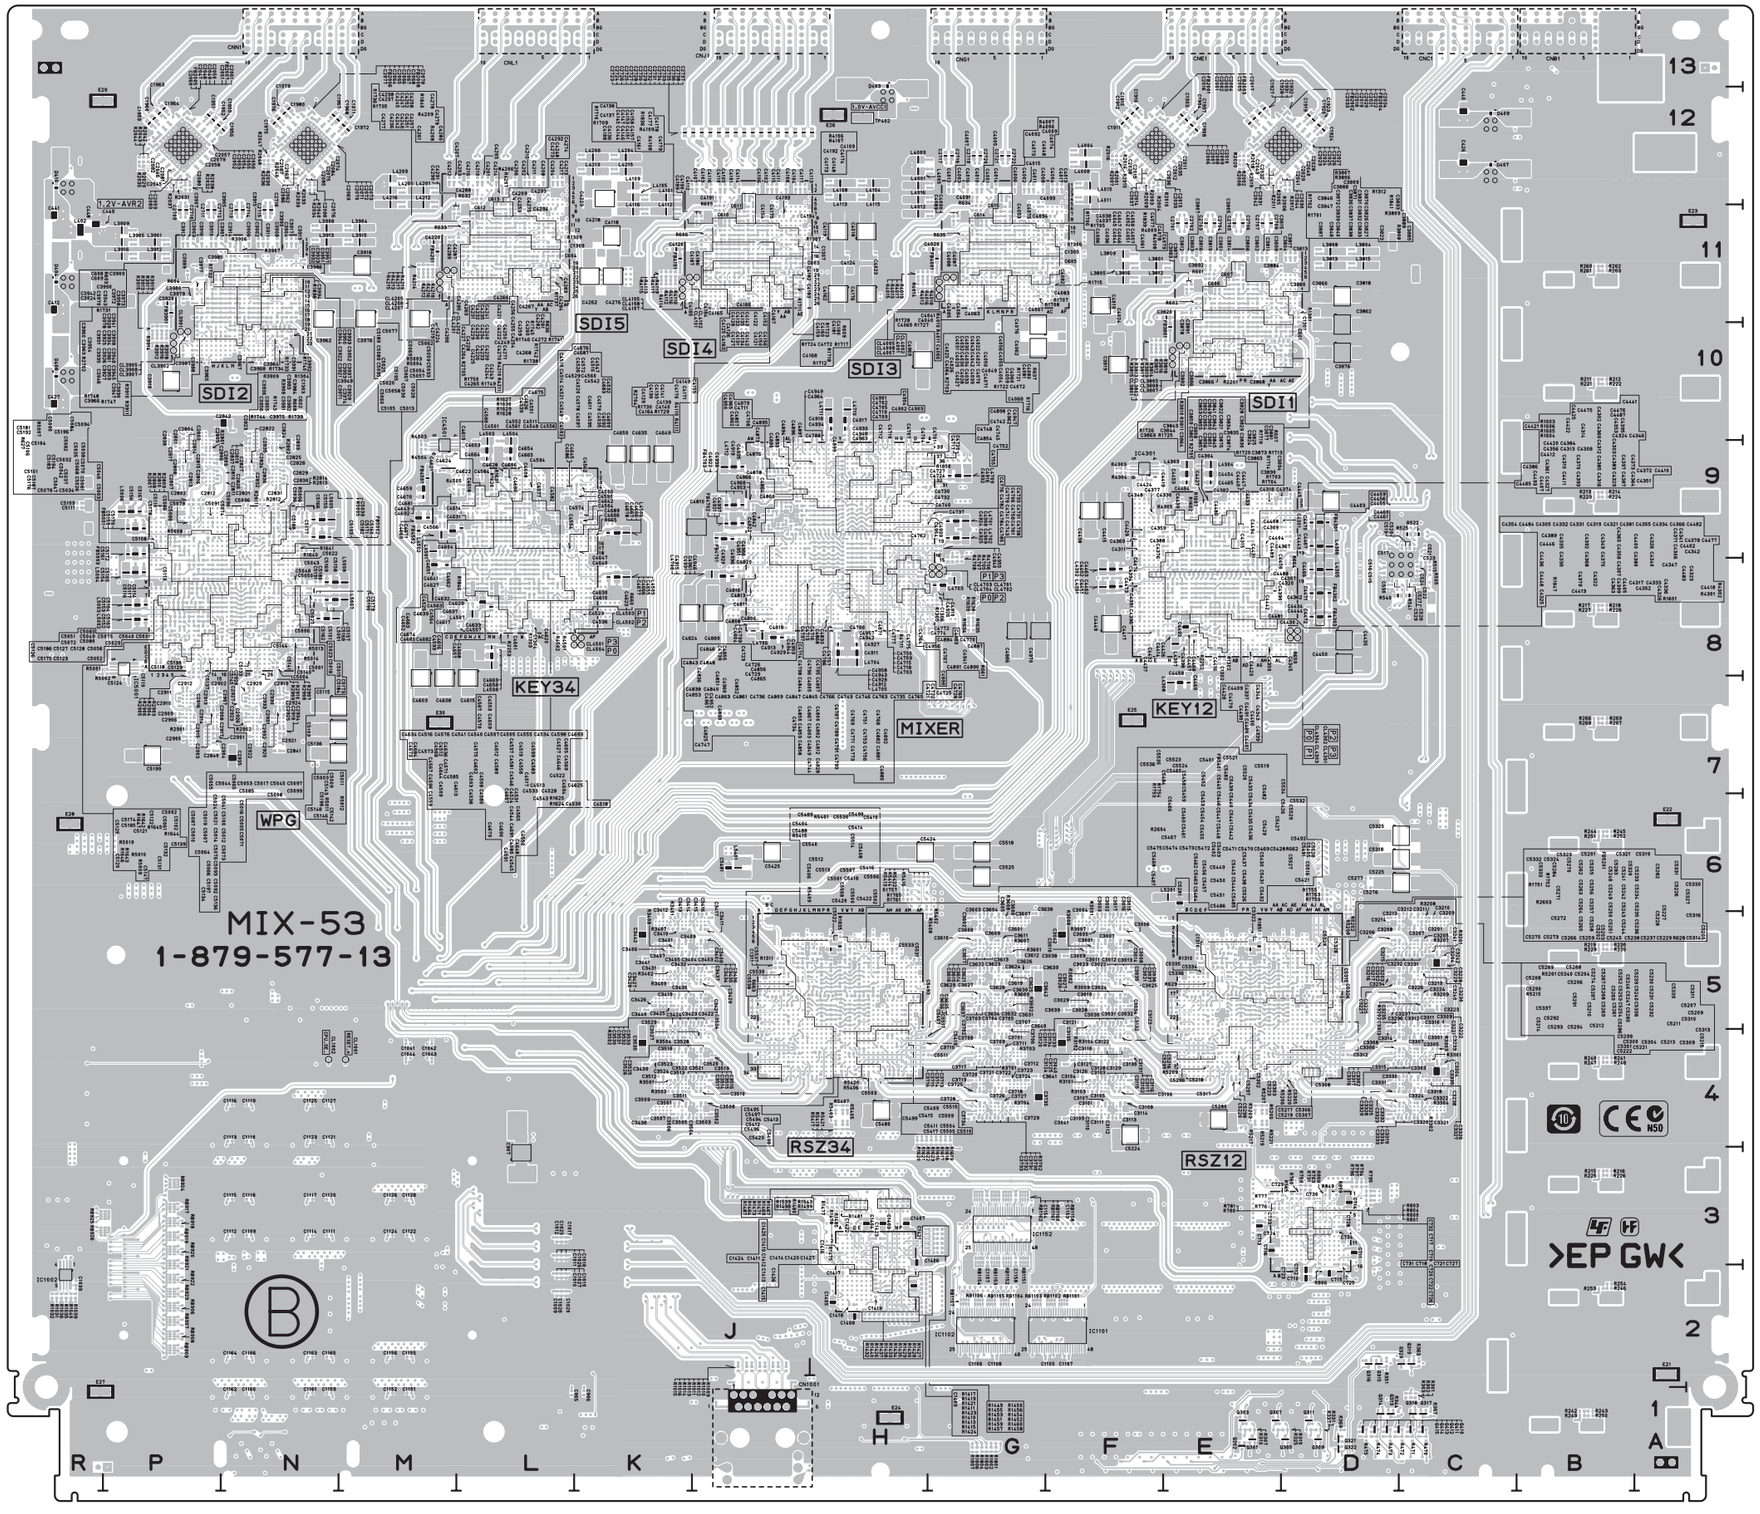

MIX-53 -B SIDE-
SUFFIX: -13

MIX-53 (1-879-577-13)
---
*:B SIDE

C101	C8	C298	B8	C607	*E11	C1047	N5	C1701	H3	C1983	P12	C2085	*N12	C2809	*P9	C3030	*F5	C3309	*C5	C3530	*K5	C3816	*E11	C3920	*P11	C4024	*F11	C4128	*J11	C4232	*L11
C201	B12	C299	C7	C608	*N11	C1048	N5	C1702	H3	C1984	P12	C2086	*N12	C2810	*P9	C3031	*F5	C3310	*C5	C3531	*K5	C3817	*D11	C3921	*N11	C4025	*G11	C4129	*J11	C4233	*L11
C202	B12	C300	C7	C609	*N11	C1049	M5	C1703	H3	C1985	P12	C2087	*N12	C2811	*P9	C3032	*F5	C3311	*C5	C3532	*J5	C3818	*D11	C3922	*N11	C4026	*G11	C4130	*J11	C4234	*L11
C203	A11	C301	E1	C610	*J11	C1050	M5	C1704	H3	C1986	P12	C2088	*N12	C2812	*P9	C3033	E3	C3312	*C5	C3533	*J5	C3819	*F10	C3923	*N11	C4027	*G11	C4131	*J11	C4235	*L11
C204	A10	C302	D1	C611	*J11	C1101	F2	C1705	H3	C1987	P12	C2101	G12	C2813	*P9	C3034	*F5	C3313	*C5	C3534	*J5	C3820	*E11	C3924	*P11	C4028	*G11	C4132	*J11	C4236	*L11
C205	A4	C303	D1	C612	*L12	C1102	G2	C1706	H3	C1988	P12	C2102	G12	C2814	*P9	C3035	*F5	C3314	*D5	C3535	*K4	C3821	*E10	C3925	*P11	C4029	*G11	C4133	*J11	C4237	*L11
C206	A9	C304	D2	C613	*L12	C1103	F2	C1707	K4	C1989	N12	C2103	G12	C2815	*P9	C3036	*F5	C3315	*D4	C3601	*G5	C3822	*E11	C3926	*P11	C4030	*G11	C4134	*J11	C4238	*L11
C207	A6	C305	C2	C614	*G11	C1104	G2	C1708	K4	C1990	N12	C2104	G12	C2816	*P9	C3037	*F5	C3316	*D4	C3602	*G5	C3823	*E11	C3927	*P11	C4031	*G11	C4135	*J11	C4239	*L11
C208	A11	C306	D1	C615	*G11	C1105	*F2	C1709	J3	C1991	N12	C2105	G12	C2817	*P9	C3038	*F5	C3317	*C4	C3603	*G5	C3824	*E10	C3928	*N11	C4032	*G11	C4136	*J11	C4240	*L11
C209	A10	C402	H12	C701	D3	C1106	*G2	C1710	J3	C1992	N12	C2106	G12	C2818	R8	C3039	*F5	C3318	*C4	C3604	*G5	C3825	*E10	C3929	*N11	C4033	*G11	C4137	*J11	C4241	*L11
C210	A4	C403	R11	C702	D2	C1107	*F2	C1801	G1	C1993	N12	C2107	G12	C2819	*N9	C3040	*F4	C3319	*C4	C3605	*G5	C3826	*E11	C3930	*N10	C4034	*G11	C4138	*J11	C4242	*L11
C211	A9	C405	H12	C703	D2	C1108	*G2	C1802	G1	C1994	N12	C2108	G12	C2820	R8	C3041	*F4	C3320	*C4	C3606	*G5	C3827	*E11	C3931	*P11	C4035	*G11	C4139	*J11	C4243	*L11
C212	A6	C406	R11	C704	D2	C1109	*N3	C1803	H1	C1995	N12	C2109	G12	C2821	*N9	C3042	*F5	C3321	*C4	C3607	*G5	C3828	*E11	C3932	*N11	C4036	*G11	C4140	*J11	C4244	*L11
C213	A11	C408	H12	C705	D3	C1110	*N4	C1804	H1	C1996	N12	C2110	G12	C2822	*N9	C3101	*F4	C3322	*C4	C3608	*G5	C3829	*E10	C3933	*N11	C4037	*G11	C4141	*J11	C4245	*L11
C214	A10	C409	R11	C706	D3	C1111	*N3	C1805	H1	C2001	*F12	C2111	G12	C2823	*N10	C3102	*F4	C3323	*C4	C3609	*G5	C3830	*E10	C3934	*N11	C4038	*G11	C4142	*J11	C4246	*L11
C215	A4	C411	H13	C707	D3	C1112	*N3	C1806	H1	C2002	*F12	C2112	G12	C2824	*N10	C3103	*F4	C3324	*C4	C3610	*G5	C3831	*E11	C3935	*P11	C4039	*G11	C4143	*J11	C4247	*L11
C216	A9	C412	*R11	C708	D3	C1113	*N4	C1901	E12	C2003	*F12	C2113	G12	C2825	*N9	C3104	*F4	C3325	*D4	C3611	*G5	C3832	*E11	C3936	*N11	C4040	*G11	C4144	*J11	C4248	*L11
C217	A6	C414	H13	C709	C2	C1114	*N3	C1902	E12	C2004	*F12	C2114	G12	C2826	*N9	C3105	*F4	C3326	*C4	C3612	*G5	C3833	*E11	C3937	*N11	C4041	*G11	C4145	*J11	C4249	*L11
C218	A11	C415	R11	C710	*D2	C1115	*N3	C1903	*E12	C2005	*F12	C2115	F12	C2827	*N9	C3106	*F4	C3327	*C4	C3613	*G5	C3834	*E10	C3938	*N11	C4042	*G11	C4146	*J11	C4250	*L11
C219	A10	C417	C12	C711	*D3	C1116	*N4	C1904	*E12	C2006	*E12	C2116	F12	C2828	*N9	C3107	*F4	C3328	*C4	C3614	*G5	C3835	*E10	C3939	M11	C4043	*G11	C4147	*J11	C4251	*L11
C220	A4	C418	R10	C712	*D2	C1117	*N3	C1905	E12	C2007	*E12	C2117	K12	C2829	*N9	C3108	*F4	C3329	*C4	C3615	*G5	C3836	*E11	C3940	P10	C4044	*G11	C4148	*J11	C4252	*L11
C221	A9	C420	C12	C713	*E3	C1118	*N3	C1906	E12	C2008	*E12	C2118	J12	C2830	*N9	C3109	*F4	C3330	*C4	C3616	*G5	C3837	*E11	C3941	*N11	C4045	*G11	C4149	*J11	C4253	*L11
C222	A6	C421	R10	C714	*D3	C1119	*N4	C1907	*E12	C2009	*E12	C2119	J12	C2831	*N9	C3110	*F4	C3331	*D4	C3617	*G5	C3838	*E11	C3942	*P11	C4046	*G11	C4150	*J11	C4254	*L11
C223	B11	C423	C12	C715	*D2	C1120	*N3	C1908	*E12	C2010	*E12	C2120	J12	C2832	*N9	C3111	*F4	C3332	*D4	C3618	F4	C3839	*E11	C3943	*N11	C4047	*G11	C4151	*J11	C4255	*L11
C224	B10	C424	R10	C716	*E3	C1121	*N4	C1909	F12	C2011	*E12	C2121	J12	C2833	R8	C3112	*F4	C3333	*D4	C3619	*G5	C3840	*E11	C3944	*N11	C4048	*G11	C4152	*J11	C4256	*L11
C225	B4	C426	*C12	C717	*D3	C1122	*M3	C1910	F12	C2012	*E12	C2122	J12	C2834	*N9	C3113	*F4	C3334	*C4	C3620	F3	C3841	*E11	C3945	*N11	C4049	*G11	C4153	*J11	C4257	*L11
C226	B9	C427	*R10	C718	*D3	C1123	*N4	C1911	*F12	C2013	*F12	C2123	J12	C2835	*N9	C3114	*F4	C3335	*C4	C3621	*G5	C3842	*E10	C3946	*P10	C4050	*G11	C4154	*J11	C4258	*L11
C227	B6	C429	C12	C719	*D3	C1124	*M3	C1912	*F12	C2014	*F12	C2124	J12	C2836	*N9	C3115	*F4	C3401	*K5	C3622	*G5	C3843	*E10	C3947	*N10	C4051	*G11	C4155	*J11	C4259	*L11
C228	B11	C430	R10	C720	*D3	C1125	*N4	C1913	F12	C2015	*F12	C2125	J12	C2837	*N9	C3116	*F4	C3402	*J5	C3623	*G5	C3844	*E10	C3948	*N11	C4052	*G11	C4156	*J11	C4260	*L11
C229	B10	C431	C12	C721	*D3	C1126	*M3	C1914	F12	C2016	*F12	C2126	J12	C2838	*P10	C3117	*F4	C3403	*J5	C3624	*G5	C3845	*E10	C3949	*N11	C4053	*G11	C4157	*J11	C4261	*L11
C230	B4	C432	R12	C722	*D3	C1127	*N4	C1915	*F12	C2017	*F12	C2127	J12	C2839	*N9	C3118	*F4	C3404	*K5	C3625	*G5	C3846	*E11	C3950	*N11	C4054	*G11	C4158	*J11	C4262	*K11
C231	B9	C433	C12	C723	*D2	C1128	*M3	C1916	*F12	C2018	*E12	C2128	J12	C2840	*P7	C3119	*F5	C3405	*K5	C3626	*G5	C3847	*E11	C3951	*N11	C4055	*G11	C4159	*J11	C4263	*L11
C232	B6	C434	R12	C724	*E3	C1151	*M1	C1917	D12	C2019	*E12	C2129	J12	C2841	*N7	C3120	*F5	C3406	*K5	C3627	*G5	C3848	*E11	C3952	*N11	C4056	*G11	C4160	*J11	C4264	*L11
C233	C10	C437	C12	C725	*D2	C1152	*M1	C1918	D12	C2020	*E12	C2130	J12	C2842	*N10	C3121	*F5	C3407	*K5	C3628	*G5	C3849	*E11	C3953	*N11	C4057	*G11	C4161	*J11	C4265	*L11
C234	C9	C438	R12	C726	*D3	C1153	*G3	C1919	*D12	C2021	*E12	C2131	H12	C2901	*P7	C3122	*F4	C3408	*J5	C3629	*G5	C3850	*E10	C3954	*P11	C4058	*G11	C4162	*H11	C4266	*L11
C235	C3	C440	*C12	C727	*D3	C1154	*G3	C1920	*D12	C2022	*E12	C2132	J12	C2902	*P7	C3123	*F4	C3409	*K5	C3630	*G5	C3851	*E10	C3955	*N11	C4059	*G11	C4163	*J11	C4267	*L11
C236	C8	C441	*R11	C728	*D3	C1155	*M2	C1921	D12	C2023	*D12	C2133	M12	C2903	*P7	C3124	*F4	C3410	*K5	C3631	*G5	C3852	*E11	C3956	*N11	C4060	*G11	C4164	*J11	C4268	*L11
C237	C5	C442	C12	C729	*D3	C1156	*M2	C1922	D12	C2024	*D12	C2134	L12	C2904	*P7	C3125	*F4	C3411	*J5	C3632	*G5	C3853	*E11	C3957	*N11	C4061	*G11	C4165	*J11	C4269	K11
C238	C10	C443	R11	C730	*D3	C1157	*G3	C1923	*D12	C2025	*D12	C2135	L12	C2905	*P7	C3126	*F4	C3412	*K5	C3633	F3	C3854	*E10	C3958	*N11	C4062	*G10	C4166	*J11	C4270	*L11
C239	C9	C446	C11	C731	*D3	C1158	*G3	C1924	*D12	C2026	*D12	C2136	L12	C2906	*P7	C3127	*F4	C3413	*K5	C3634	*G5	C3855	*E10	C3959	*N11	C4063	*G11	C4167	*J11	C4271	*L11
C240	C4	C447	C11	C732	*D3	C1159	*N1	C1925	E12	C2027	*D12	C2137	L12	C2907	*N7	C3128	*F4	C3414	*K5	C3635	*G5	C3856	*E10	C3960	*P11	C4064	*G11	C4168	*J11	C4272	*L11
C241	C8	C448	*R11	C733	*E3	C1160	*N1	C1926	E12	C2028	*D12	C2138	L12	C2908	*P7	C3129	*F4	C3415	*J5	C3636	*G5	C3857	*E10	C3961	*N11	C4065	*G11	C4169	H11	C4273	*L11
C242	C6	C449	*P11	C734	*D3	C1161	*N1	C1927	*E12	C2029	*D12	C2139	L12	C2909	*P7	C3130	*F4	C3416	*J5	C3637	*G5	C3858	*E10	C3962	*N11	C4066	*G11	C4170	*J11	C4274	*L11
C243	C11	C501	B13	C901	R3	C1162	*N1	C1928	*E12	C2030	*D12	C2140	L12	C2910	*P7	C3131	*F4	C3417	*J5	C3638	*G5	C3859	*E10	C3963	*P11	C4067	*G11	C4171	*J11	C4275	*L11
C244	C10	C502	B13	C902	L2	C1163	*N2	C1929	E12	C2031	*E12	C2141	L12	C2911	*P7	C3132	*F5	C3418	J4	C3639	*G5	C3860	*D11	C3964	*N10	C4068	*G11	C4172	*J11	C4276	*K11
C245	C4	C503	B12	C903	K2	C1164	*N2	C1930	E12	C2032	*E12	C2142	L12	C2912	*P7	C3133	*F5	C3419	*K5	C3640	*G5	C3861	F10	C3965	*P10	C4069	F10	C4173	*J11	C4277	*L11
C246	C9	C504	B13	C904	L1	C1165	*N2	C1931	*E12	C2033	*E12	C2143	L12	C2913	*P7	C3134	*F5	C3420	J3	C3641	*G4	C3862	*D10	C3966	*P10	C4070	*G11	C4174	*J11	C4278	*L11
C247	C6	C505	K1	C905	*L1	C1166	*N2	C1932	*E12	C2034	*D12	C2144	L12	C2914	*P7	C3135	*F4	C3421	*J5	C3642	*G5	C3863	*E10	C3967	*N10	C4071	*G11	C4175	*J11	C4279	*L11
C248	A5	C506	C8	C906	*K1	C1201	E3	C1933	F12	C2035	*E12	C2145	L12	C2915	*P7	C3201	*C5	C3422	*J5	C3701	*G4	C3864	*E10	C3968	*N10	C4072	*G11	C4176	*H11	C4280	*L11
C249	A2	C507	C8	C907	*L3	C1202	N2	C1934	F12	C2036	*E12	C2146	L12	C2916	*P7	C3202	*C5	C3423	*K5	C3702	*G5	C3865	*E10	C3969	P11	C4073	*G11	C4177	*J11	C4281	*L11
C250	A7	C508	C8	C908	M1	C1203	E3	C1935	F12	C2037	*F12	C2147	L12	C2917	*P7	C3203	*C5	C3424	*K5	C3703	*G5	C3866	*E10	C3970	*N11	C4074	*G11	C4178	*J11	C4282	*L11
C251	A3	C509	D8	C909	M1	C1204	N2	C1936	F12	C2038	*F12	C2148	L12	C2918	*N7	C3204	*C5	C3425	*K5	C3704	*G5	C3867	*E10	C3971	*N11	C4075	*G11	C4179	*J11	C4283	*L11
C252	A5	C510	C8	C1001	L2	C1205	F3	C1937	E12	C2039	*F12	C2701	*E11	C2919	*N7	C3205	*C5	C3426	*K5	C3705	*G5	C3868	*E10	C3972	*N11	C4076	*G10	C4180	*J11	C4284	*L11
C253	A2	C511	B12	C1002	L3	C1206	F3	C1938	E12	C2040	*D12	C2702	*E11	C2920	*N7	C3206	*D5	C3427	*J5	C3706	*G5	C3869	D11	C3973	*N11	C4077	*F11	C4181	*J11	C4285	*L11
C254	A7	C512	D9	C1003	L3	C1207	F3	C1939	E12	C2041	*D12	C2703	*E11	C2921	*N7	C3207	*C5	C3428	*K5	C3707	*G5	C3870	*E11	C3974	*N10	C4078	*F11	C4182	*J11	C4286	*M11
C255	A3	C513	C8	C1004	L3	C1208	G3	C1940	E12	C2042	*E12	C2704	*E11	C2922	*N7	C3208	*D5	C3429	*J5	C3708	*G4	C3871	*E11	C3975	*N10	C4079	*F11	C4183	*J11	C4287	*L11
C256	A5	C514	C8	C1005	J2	C1209	G3	C1941	E12	C2043	*E12	C2705	*E11	C2923	*N7	C3209	*C5	C3430	*K5	C3709	*G4	C3872	*E11	C3976	*M11	C4080	*F11	C4184	*J11	C4288	*L12
C257	A2	C515	*D8	C1006	J2	C1210	G3	C1942	E12	C2044	*E12	C2706	*E11	C2924	*N7	C3210	*C5	C3431	*K5	C3710	*G4	C3873	*E10	C3977	*P11	C4081	*F11	C4185	*J11	C4289	*M11
C258	A7	C516	*D8	C1007	J2	C1301	*D11	C1943	E12	C2045	*P12	C2707	*E11	C2925	*N7	C3211	*C5	C3432	*K5	C3711	*G4	C3874	*E10	C3978	*P11	C4082	*F11	C4186	*J11	C4290	*M11
C259	A3	C517	*D9	C1008	J2	C1302	*E8	C1944	E12	C2046	*P12	C2708	*E11	C2926	*N7	C3212	*C5	C3433	J3	C3712	*G4	C3875	*E10	C3979	*P11	C4083	*F11	C4187	*J11	C4291	*L11
C260	A5	C518	C9	C1009	*L2	C1303	*N11	C1945	D12	C2047	*P12	C2709	*P11	C2927	*N7	C3213	*C5	C3434	*K5	C3713	*G4	C3876	*D10	C3980	*P11	C4084	*G11	C4188	*J11	C4292	*L11
C261	B2	C519	*C9	C1010	*L2	C1304	*L8	C1946	D12	C2048	*P12	C2710	*P11	C2928	*N7	C3214	*D5	C3435	*J5	C3714	*G4	C3877	*D10	C3981	*N11	C4085	*G11	C4189	*J11	C4293	*L12
C262	A7	C520	*C9	C1011	*L3	C1305	*F11	C1947	D12	C2049	*P12	C2711	*P11	C2929	*N7	C3215	*D5	C3436	*J5	C3715	*G4	C3878	*E11	C3982	*N11	C4086	*G11	C4190	*J11	C4294	*L11
C263	A3	C521	*C9	C1012	*L3	C1306	*G8	C1948	D12	C2050	*P12	C2712	*P11	C2930	*N7	C3216	*D5	C3437	*J5	C3716	*G4	C3879	*E11	C3983	*N11	C4087	*G11	C4191	*J12	C4301	*D9
C264	B5	C522	*C8	C1013	J2	C1307	*J11	C1949	P12	C2051	*P12	C2713	*N11	C2931	*N7	C3217	*C5	C3438	*K4	C3717	*G4	C3880	*D11	C3984	*N11	C4088	*G11	C4192	*J11	C4302	*E9
C265	B2	C523	*C8	C1014	H1	C1308	P8	C1950	P12	C2052	*P12	C2714	*N11	C2932	*N7	C3218	C3	C3439	*K4	C3718	*G4	C3881	*D10	C3985	*P11	C4089	*G11	C4193	*J11	C4303	*E9
C266	B7	C524	*C8	C1015	J1	C1309	*L11	C1951	*P12	C2053	*P12	C2715	*N11	C2933	*N7	C3219	*C5	C3440	*K5	C3719	*G4	C3882	*E10	C3986	*N11	C4090	*G11	C4194	*J11	C4304	*E9
C267	B3	C525	L4	C1016	J2	C1310	*E5	C1952	*P12	C2054	*P12	C2716	*N11	C2934	*N7	C3220	C3	C3441	*K5	C3720	*G4	C3883	*E11	C3987	*P10	C4091	*G12	C4201	*L12	C4305	*E8
C268	B5	C526	L4	C1017	*L3	C1311	*J5	C1953	P12	C2055	*P12	C2717	*G12	C2935	*N7	C3221	*C5	C3442	*K5	C3721	*G4	C3884	*D11	C3988	*P10	C4092	*G11	C4202	*L12	C4306	*E8
C269	B2	C527	*C8	C1018	*L3	C1401	G2	C1954	P12	C2056	*P12	C2718	*G12	C3001	*F5	C3222	*C5	C3501	*K4	C3722	*G4	C3885	*D11	C3989	*P11	C4093	*G11	C4203	*L12	C4307	*E8
C270	B7	C528	*C8	C1019	*L2	C1402	H2	C1955	*P12	C2057	*P12	C2719	*G12	C3002	*F5	C3223	*C5	C3502	*J4	C3723	*G4	C3886	*E10	C3990	*N11	C4094	*F11	C4204	*L12	C4308	*E9
C271	B3	C529	*D8	C1020	*L2	C1403	*H3	C1956	*N12	C2058	*P12	C2720	*G12	C3003	*F5	C3224	*C5	C3503	*J4	C3724	*G4	C3887	*E11	C3991	*N10	C4101	*J12	C4205	*L12	C4309	*E9
C272	C4	C530	*D8	C1021	J2	C1404	*H3	C1957	P12	C2059	*P12	C2721	*G12	C3004	*F5	C3225	*C5	C3504	*K4	C3725	*G4	C3888	*E11	C3992	*N10	C4102	*J12	C4206	*L12	C4310	*E9
C273	C1	C531	C8	C1022	J1	C1405	*H2	C1958	P12	C2060	*P12	C2722	*G12	C3005	*F5	C3226	*C5	C3505	*K4	C3726	*G4	C3889	*D11	C3993	*N11	C4103	*J12	C4207	*M12	C4311	*F9
C274	C6	C532	L5	C1023	H1	C1406	*H3	C1959	*P12	C2061	*P12	C2723	*K12	C3006	*F5	C3227	*D5	C3506	*K4	C3727	*G4	C3890	*D10	C3994	*N11	C4104	*J12	C4208	*L12	C4312	*E9
C275	C2	C533	C8	C1024	J2	C1407	*H3	C1960	*P12	C2062	*N12	C2724	*J12	C3007	*F5	C3228	*C5	C3507	*K4	C3728	*G4	C3891	*E11	C4001	*G12	C4105	*J12	C4209	*L12	C4313	*E9
C276	C5	C534	C8	C1025	*L3	C1408	*H2	C1961	P12	C2063	*N12	C2725	*J12	C3008	*F5	C3229	*C5	C3508	*J4	C3729	*G4	C3892	*E11	C4002	*G12	C4106	*J12	C4210	*L12	C4314	*E9
C277	C2	C535	C8	C1026	*L3	C1409	*H2	C1962	P12	C2064	*N12	C2726	*J12	C3009	*F5	C3230	*C5	C3509	*K4	C3730	*G4	C3893	*D11	C4003	*G12	C4107	*J12	C4211	*L12	C4315	*E9
C278	C7	C536	D3	C1027	*L2	C1410	*H3	C1963	*P12	C2065	*N12	C2727	*J12	C3010	*F5	C3231	*C5	C3510	*J4	C3731	*G4	C3894	*D10	C4004	*F12	C4108	*J12	C4212	*M12	C4316	*E8
C279	C3	C537	C9	C1028	*L2	C1411	*H2	C1964	*P12	C2066	*N12	C2728	*J12	C3011	*F5	C3232	*C5	C3511	*K4	C3732	*G4	C3901	*N11	C4005	*G12	C4109	*J11	C4213	*L12	C4317	*E8
C280	C5	C538	C9	C1029	J2	C1412	*H2	C1965	N12	C2067	*N12	C2729	*J12	C3012	*F5	C3233	C3	C3512	*K4	C3733	*G4	C3902	*N11	C4006	*G12	C4110	*J12	C4214	*L12	C4318	*E9
C281	C2	C539	D9	C1030	J1	C1413	*H2	C1966	N12	C2068	*N12	C2730	*J12	C3013	*F5	C3234	*D5	C3513	*K4	C3734	*G4	C3903	*P11	C4007	*G12	C4111	*J12	C4215	*L12	C4319	*E8
C282	C7	C540	D9	C1031	H1	C1414	*H2	C1967	*N12	C2069	*N12	C2731	*J12	C3014	*F5	C3235	*D5	C3514	*K4	C3735	*G4	C3904	*N11	C4008	*G12	C4112	*J12	C4216	*L12	C4320	*E8
C283	C3	C541	D8	C1032	J2	C1415	*H2	C1968	*N12	C2070	*N12	C2732	*J12	C3015	*F5	C3236	*D5	C3515	*J4	C3801	*E11	C3905	*P11	C4009	*G11	C4113	*J12	C4217	*L12	C4321	*E8
C284	A12	C542	C8	C1033	K2	C1416	*H3	C1969	M12	C2071	*N12	C2733	*J12	C3016	*F5	C3237	*C5	C3516	*J4	C3802	*E11	C3906	*N11	C4010	*G12	C4114	*J12	C4218	*K12	C4322	*E8
C285	A12	C543	C9	C1034	K2	C1417	*H2	C1970	M12	C2072	*N12	C2734	*J12	C3017	*F5	C3238	*C4	C3517	*J4	C3803	*E11	C3907	*P11	C4011	*G12	C4115	*J12	C4219	*M11	C4323	*E8
C286	A12	C544	C9	C1035	K2	C1418	*H2	C1971	*M12	C2073	*N12	C2735	*J12	C3018	F4	C3239	*C4	C3518	*K4	C3804	*D11	C3908	*N11	C4012	*G12	C4116	*J12	C4220	*M11	C4324	*E9
C287	A12	C545	D9	C1036	K3	C1419	*H2	C1972	*M12	C2074	*N12	C2736	*J12	C3019	*F5	C3240	*C5	C3519	*J4	C3805	*E11	C3909	*N11	C4013	*F12	C4117	*J12	C4221	*L11	C4325	*E8
C288	B12	C546	D9	C1037	K3	C1420	*H2	C1973	N12	C2075	*N12	C2737	*H12	C3020	E3	C3241	*C5	C3520	*J4	C3806	*E11	C3910	*P11	C4014	*G12	C4118	*K11	C4222	*L11	C4326	*E8
C289	B12	C547	C8	C1038	R3	C1421	*H3	C1974	N12	C2076	*N12	C2738	*J12	C3021	*F5	C3242	*C5	C3521	*K4	C3807	*E11	C3911	*N11	C4015	*G12	C4119	*H11	C4223	*K12	C4327	*E8
C290	C11	C548	D8	C1039	*R2	C1422	*H3	C1975	*N12	C2077	*N12	C2801	*P9	C3022	*F5	C3301	*C4	C3522	*K4	C3808	*E11	C3912	*P11	C4016	*G12	C4120	*K11	C4224	*M11	C4328	*E8
C291	C11	C549	E3	C1040	M4	C1423	*H3	C1976	*N12	C2078	*N12	C2802	*P9	C3023	*F5	C3302	*C4	C3523	*K4	C3809	*E11	C3913	*N11	C4017	*F12	C4121	*J11	C4225	*L11	C4329	*E8
C292	C11	C601	*D10	C1041	*M4	C1424	*H2	C1977	N12	C2079	*P12	C2803	*P9	C3024	*F5	C3303	*C4	C3524	*K4	C3810	*E11	C3914	*N11	C4018	*H11	C4122	*J11	C4226	*L11	C4330	*E9
C293	A8	C602	*N11	C1042	*M4	C1425	*H3	C1978	N12	C2080	*P12	C2804	*P10	C3025	*F5	C3304	*C4	C3525	*J4	C3811	*E11	C3915	*N11	C4019	*F11	C4123	K11	C4227	*L11	C4331	*E8
C294	A8	C603	*J11	C1043	*M4	C1426	*H2	C1979	*N12	C2081	*P12	C2805	*P10	C3026	*F5	C3305	*C4	C3526	*K4	C3812	*E11	C3916	*P11	C4020	*G11	C4124	*H11	C4228	*L11	C4332	*E8
C295	A8	C604	*L11	C1044	*M4	C1427	*H2	C1980	*N12	C2082	*P12	C2806	*P9	C3027	*F5	C3306	*C4	C3527	*J4	C3813	*D11	C3917	*N11	C4021	*G11	C4125	*J11	C4229	*L11	C4333	*E8
C296	A8	C605	*F11	C1045	N5	C1601	G3	C1981	P12	C2083	*P12	C2807	*P9	C3028	*F5	C3307	*C4	C3528	*K4	C3814	*E11	C3918	*M11	C4022	*G11	C4126	*J11	C4230	*L11	C4334	*E8
C297	B8	C606	*E11	C1046	N5	C1602	G3	C1982	P12	C2084	*N12	C2808	*P9	C3029	*F5	C3308	*D4	C3529	*K5	C3815	*E11	C3919	*P10	C4023	*H11	C4127	*J11	C4231	*L11	C4335	*E8

C4336 *E8
C4337 *E8
C4338 *E8
C4339 *E8
C4340 *E8
C4341 *E8
C4342 *E8
C4343 *E8
C4344 *E8
C4345 *D8
C4346 *E9
C4347 *E8
C4348 *F9
C4349 *E8
C4350 *E8
C4351 *E8
C4352 *E8
C4353 *E9
C4354 *F8
C4355 *E8
C4356 *E9
C4357 *D8
C4358 *E8
C4359 *E9
C4360 *E9
C4361 *E8
C4362 *D8
C4363 *E8
C4364 *E8
C4365 *E8
C4366 *E8
C4367 *E9
C4368 *E8
C4369 *F9
C4370 *E9
C4371 *E8
C4372 *E8
C4373 *E9
C4374 *D9
C4375 *E8
C4376 *E9
C4377 *F9
C4378 *E8
C4379 *E8
C4380 *E8
C4381 *E8
C4382 *E9
C4383 *E9
C4384 *E9
C4385 *E8
C4386 *E9
C4387 *E8
C4388 *E9
C4389 *E8
C4390 *E8
C4391 *F8
C4392 *E8
C4393 *E8
C4394 *F8
C4395 *E9
C4396 *F8
C4397 *E9
C4398 *E8
C4399 *E8
C4400 *E8
C4401 *E8
C4402 *E8
C4403 *D9
C4404 *E9
C4405 *E8
C4406 *E8
C4407 *E8
C4408 *E9
C4409 *E8
C4410 *E8
C4411 *E8
C4412 *E9
C4413 *E8
C4414 *F8
C4415 *F9
C4416 *E8
C4417 *F8
C4418 *E8
C4419 *E9
C4420 *E9
C4421 *E9
C4422 *E9
C4423 *E8
C4424 *F9
C4425 *E9
C4426 *E8
C4427 *E9
C4428 *E8
C4429 *F9
C4430 *D8
C4431 *E9
C4432 *F8
C4433 *E9

C4434 *D8
C4435 *D8
C4436 *E8
C4437 *F8
C4438 *F9
C4439 *E9
C4440 *E9
C4441 *E9
C4442 *E8
C4443 *D9
C4444 *D8
C4445 *D9
C4446 *E8
C4447 *E9
C4448 *E8
C4449 *F8
C4450 *D8
C4451 *F8
C4452 *F8
C4453 *E9
C4454 *E9
C4455 *D8
C4456 *D9
C4457 *E8
C4458 *E7
C4459 *D9
C4460 *D8
C4461 *D8
C4462 *F8
C4463 *F8
C4464 *E9
C4465 *E9
C4466 *D8
C4467 *D9
C4468 *E8
C4469 *E7
C4470 *D9
C4471 *D8
C4472 *D8
C4473 *F8
C4474 *F8
C4475 *E9
C4476 *E9
C4477 *E8
C4478 *E8
C4479 *E8
C4480 *E8
C4481 *E8
C4482 *E8
C4483 *E8
C4484 *E8
C4485 *E8
C4486 *E9
C4487 *E9
C4488 *E8
C4489 *E8
C4490 *E8
C4491 *E8
C4492 *E8
C4493 *E8
C4494 *E9
C4495 *E9
C4496 *E8
C4497 *E8
C4498 *E8
C4499 *E8
C4500 *E8
C4501 *L9
C4502 *L9
C4503 *L9
C4504 *K9
C4505 *L9
C4506 *K9
C4507 *L9
C4508 *L8
C4509 *L8
C4510 *L9
C4511 *L9
C4512 *L8
C4513 *L8
C4514 *L9
C4515 *L9
C4516 *L9
C4517 *L8
C4518 *L8
C4519 *L8
C4520 *L9
C4521 *L9
C4522 *L8
C4523 *K8
C4524 *L8
C4525 *L9
C4526 *L9
C4527 *L8
C4528 *L8
C4529 *L9
C4530 *L8
C4531 *L8
C4532 *L9
C4533 *L8
C4534 *L9
C4535 *L9
C4536 *K8
C4537 *L8

C4538 *L8
C4539 *L9
C4540 *L9
C4541 *L9
C4542 *L9
C4543 *L8
C4544 *L8
C4545 *L8
C4546 *L8
C4547 *L9
C4548 *L9
C4549 *L9
C4550 *L8
C4551 *L9
C4552 *L9
C4553 *L9
C4554 *L9
C4555 *L9
C4556 *L9
C4557 *L8
C4558 *L8
C4559 *L8
C4560 *L9
C4561 *L9
C4562 *K9
C4563 *L9
C4564 *L9
C4565 *L8
C4566 *M9
C4567 *L8
C4568 *L8
C4569 *L8
C4570 *L9
C4571 *L8
C4572 *L9
C4573 *L8
C4574 *L9
C4575 *L8
C4576 *L9
C4577 *L9
C4578 *L9
C4579 *L9
C4580 *L8
C4581 *L8
C4582 *L9
C4583 *L8
C4584 *L9
C4585 *L8
C4586 *L9
C4587 *L9
C4588 *L9
C4589 *L8
C4590 *K9
C4591 *L8
C4592 *L9
C4593 *L9
C4594 *L9
C4595 *L9
C4596 *L8
C4597 *L9
C4598 *L9
C4599 *L8
C4600 *L9
C4601 *L8
C4602 *L8
C4603 *M7
C4604 *M9
C4605 *L8
C4606 *L9
C4607 *L8
C4608 *L9
C4609 *L9
C4610 *K8
C4611 *L9
C4612 *L8
C4613 *L8
C4614 *M9
C4615 *L7
C4616 *L9
C4617 *M8
C4618 *L9
C4619 *L9
C4620 *L8
C4621 *M9
C4622 *L9
C4623 *L8
C4624 *M9
C4625 *L8
C4626 *L9
C4627 *M8
C4628 *L9
C4629 *L8
C4630 *K8
C4631 *M9
C4632 *L8
C4633 *L8
C4634 *L9
C4635 *K9

C4636 *L8
C4637 *M8
C4638 *M7
C4639 *L9
C4640 *K8
C4641 *M8
C4642 *K9
C4643 *L9
C4644 *L8
C4645 *L9
C4646 *L8
C4647 *K9
C4648 *L8
C4649 *K9
C4650 *K9
C4651 *M8
C4652 *M9
C4653 *L9
C4654 *L9
C4655 *K8
C4656 *K9
C4657 *L8
C4658 *L8
C4659 *M9
C4660 *M9
C4661 K9
C4662 *M8
C4663 *L9
C4664 *L9
C4665 *L9
C4666 *K8
C4667 *K9
C4668 *L8
C4669 *L8
C4670 *M9
C4671 *M9
C4672 K9
C4673 *M8
C4674 *L9
C4675 *L9
C4676 *L9
C4677 *K8
C4678 *K9
C4679 *L8
C4680 *L8
C4681 *M9
C4682 *L9
C4683 *L9
C4684 *L8
C4685 *L9
C4686 *L9
C4687 *L9
C4688 *K9
C4689 *L9
C4690 *L8
C4691 *L8
C4692 *L9
C4693 *L9
C4694 *L8
C4695 *L9
C4696 *L8
C4697 *L8
C4698 *L8
C4699 *L8
C4700 *M9
C4701 *G9
C4702 *H9
C4703 *H8
C4704 *H9
C4705 *H9
C4706 *H9
C4707 *H9
C4708 *J9
C4709 *H9
C4710 *H9
C4711 *J9
C4712 *H9
C4713 *J8
C4714 *H9
C4715 *H8
C4716 *H8
C4717 *G9
C4718 *H8
C4719 *H9
C4720 *G9
C4721 *H9
C4722 *H9
C4723 *J9
C4724 *H9
C4725 *H9
C4726 *J9
C4727 *H9
C4728 *H9
C4729 *J9
C4730 *G9
C4731 *H9
C4732 *G9
C4733 *H9
C4734 *J9
C4735 *H9
C4736 *J9
C4737 *G9
C4738 *H9
C4739 *J9

C4740 *H9
C4741 *H9
C4742 *H9
C4743 *H9
C4744 *H8
C4745 *H9
C4746 *H9
C4747 *J8
C4748 *H9
C4749 *H9
C4750 *H8
C4751 *H9
C4752 *H9
C4753 *H9
C4754 K8
C4755 *H9
C4756 *H8
C4757 *H8
C4758 *H9
C4759 *H8
C4760 *H9
C4761 *H9
C4762 *G9
C4763 *H9
C4764 *H8
C4765 *H9
C4766 *H9
C4767 *H8
C4768 *H9
C4769 *H9
C4770 *H8
C4771 *H9
C4772 *H8
C4773 *H8
C4774 *H8
C4775 *H8
C4776 *H9
C4777 *H8
C4779 *H9
C4780 *H8
C4782 *H9
C4784 *H9
C4785 *H9
C4786 *H8
C4787 *H9
C4788 *H9
C4789 *H9
C4791 *H8
C4793 *H8
C4795 *H9
C4796 *H9
C4797 *J8
C4798 *H9
C4799 *J8
C4800 *H9
C4802 *H9
C4803 *H9
C4804 *J8
C4805 *H9
C4806 *J8
C4807 *H9
C4808 *J8
C4809 *H9
C4810 *J9
C4811 *J8
C4812 *H8
C4813 *J8
C4814 *J8
C4815 *J8
C4816 *J8
C4818 *J8
C4820 *J8
C4822 *J9
C4824 *K8
C4825 *J9
C4828 *H8
C4830 *J9
C4832 G8
C4833 *H8
C4836 *J9
C4838 *J9
C4840 *J9
C4841 G8
C4842 *J9
C4843 *J9
C4844 *H9
C4845 *H9
C4846 *J9
C4847 *H9
C4848 *J9
C4849 *H8
C4850 *H9
C4851 *J9
C4852 *J9
C4853 *J9
C4854 *H9
C4855 *J9
C4856 *J9
C4857 *J9
C4858 *H8

C4859 *H9
C4860 *J9
C4861 *J9
C4862 *J9
C4863 *J9
C4864 *J9
C4865 *J9
C4866 *J9
C4867 *H9
C4868 *H8
C4871 *H8
C4873 *J9
C4876 *J9
C4878 *J9
C4879 *J9
C4880 *J9
C4881 *H8
C4882 *H9
C4883 *H8
C4884 *H8
C4885 *H8
C4886 *G8
C4887 *H8
C4888 *H8
C4889 *J8
C4890 *H8
C4891 *H8
C4892 *H9
C4893 *J9
C4894 *J9
C4895 *J9
C4896 *H9
C4897 *J9
C4898 *H9
C4899 *H9
C4901 *H9
C4902 *H9
C4903 *H9
C4904 *H9
C4906 G8
C4907 G8
C4908 *G9
C4909 *G9
C4910 *G8
C4911 *H8
C4912 *H8
C4913 *J8
C4914 J9
C4915 *J8
C4916 *G9
C4917 *H10
C4918 *H10
C4919 *J9
C4920 *J9
C4921 *J9
C4922 *J9
C4923 J8
C4924 *G9
C4925 *G9
C4926 *G8
C4927 *H8
C4928 *H8
C4929 *J8
C4930 J9
C4931 *J8
C4932 *G9
C4933 *H10
C4934 *H10
C4935 *J9
C4936 *J9
C4937 *J9
C4938 *J9
C4939 *H9
C4940 *G9
C4941 *H8
C4942 *H8
C4943 *H8
C4944 *J8
C4945 J9
C4946 *J8
C4947 *H9
C4948 *H10
C4949 *H10
C4950 *J9
C4951 *J9
C4952 *J9
C4953 *J9
C4954 *G9
C4955 *G9
C4956 *H8
C4957 *H8
C4958 *H8
C4959 *J8
C4960 *J9
C4961 *J8
C4962 *H9
C4963 *H9
C4964 *H9

C4965 *J9
C4966 *J9
C4967 *J9
C4968 *J9
C4969 *H10
C4970 *G8
C5001 *N8
C5002 *P8
C5003 *N8
C5004 *N8
C5005 *N8
C5006 *N8
C5007 *N8
C5008 *N8
C5009 *N8
C5010 *P8
C5011 *N8
C5012 *N8
C5013 *N8
C5014 *N8
C5015 *N8
C5016 *N8
C5017 *N8
C5018 *N8
C5019 *N8
C5020 *N9
C5021 *N8
C5022 *N8
C5023 *N8
C5024 *N8
C5025 *N9
C5026 *P8
C5027 *N8
C5028 *N9
C5029 *P8
C5030 *N9
C5031 *N8
C5032 *P8
C5033 *N9
C5034 *P8
C5035 *P8
C5036 *N9
C5037 *P8
C5038 *N8
C5039 *N9
C5040 *P8
C5041 *N8
C5042 *P8
C5043 *N8
C5044 *N8
C5045 *N8
C5046 *N8
C5047 *P8
C5048 *N8
C5049 *P8
C5050 *N8
C5051 *P8
C5052 *P8
C5053 *N8
C5054 *N9
C5055 *N8
C5056 *P8
C5057 *N9
C5058 *N8
C5059 *N9
C5060 *N8
C5061 *P8
C5062 *N9
C5063 *N8
C5064 *P8
C5065 *N8
C5066 *N8
C5067 *N9
C5068 *P8
C5069 *N9
C5070 *N8
C5071 *N8
C5072 *P8
C5073 *N8
C5074 *N9
C5075 *P8
C5076 *N8
C5077 *N9
C5078 *P8
C5079 *P9
C5080 *P8
C5081 *N8
C5082 *P9
C5083 *P8
C5084 *P9
C5085 *N8
C5086 *P9
C5087 *P8
C5088 *P9
C5089 *N9
C5090 *P9
C5091 *P9
C5092 *N8

C5093 *N8
C5094 *P9
C5095 *N9
C5096 *N9
C5097 *N8
C5098 *N9
C5099 *N8
C5100 *N8
C5101 *P8
C5102 *P8
C5103 *M7
C5104 *P9
C5105 *N8
C5106 *P9
C5107 N7
C5108 *P9
C5109 *R9
C5110 *P9
C5111 *R9
C5112 N7
C5113 *P8
C5114 *P8
C5115 *M7
C5116 *P8
C5117 *P8
C5118 *P8
C5119 *P8
C5120 *P8
C5121 *P8
C5122 *P8
C5123 *P8
C5124 *P7
C5125 *P8
C5126 *P8
C5127 *P8
C5128 *P8
C5129 *P8
C5130 *P8
C5131 *P8
C5132 *P8
C5133 *N8
C5134 *P8
C5135 R9
C5136 *N8
C5137 *P8
C5138 *M7
C5139 *P8
C5140 *N8
C5141 *N8
C5142 *N8
C5143 *N8
C5144 *N8
C5145 *N8
C5146 *N8
C5147 *P8
C5148 *N8
C5149 R9
C5150 R9
C5151 *N8
C5152 *P8
C5153 *P8
C5154 *P8
C5155 *N9
C5156 *P9
C5157 *N8
C5158 *N8
C5159 *P9
C5160 *N9
C5161 *P9
C5162 *N8
C5163 *P8
C5164 *P8
C5165 *P8
C5166 *N9
C5167 *P9
C5168 *N8
C5169 *N8
C5170 *P9
C5171 *N9
C5172 *P9
C5173 *N8
C5174 *P8
C5175 *P8
C5176 *P8
C5177 *N9
C5178 *P9
C5179 *N8
C5180 *N8
C5181 *P9
C5182 *N9
C5183 *P8
C5184 *N8
C5185 *P8
C5186 *P8
C5187 *P8
C5188 *N9
C5189 *N9
C5190 *N8

C5191 *N8
C5192 *P9
C5193 *N9
C5194 *P8
C5195 *N9
C5196 *P9
C5197 *N8
C5198 *N8
C5199 *P7
C5201 *E5
C5202 *E5
C5203 *E5
C5204 *E5
C5205 *D5
C5206 *E5
C5207 *D5
C5208 *E5
C5209 *D5
C5210 *E5
C5211 *D4
C5212 *E4
C5213 *D4
C5214 *E4
C5215 *D4
C5216 *E4
C5217 *D4
C5218 *E4
C5219 *D4
C5220 *E4
C5221 *E4
C5222 *E4
C5223 *E4
C5224 *F4
C5225 *C6
C5226 *D5
C5227 *D5
C5228 *D5
C5229 *D5
C5230 *D5
C5231 *D5
C5232 *D5
C5233 *E5
C5234 *E5
C5235 *E5
C5236 *E5
C5237 *D5
C5238 *E5
C5239 *E5
C5240 *E5
C5241 *E5
C5242 *E5
C5243 *E5
C5244 *E5
C5245 *E5
C5246 *E5
C5247 *E5
C5248 *E5
C5249 *E5
C5250 *E5
C5251 *E5
C5252 *E5
C5253 *E5
C5254 *E5
C5255 *E5
C5256 *E5
C5257 *E5
C5258 *E5
C5259 *E5
C5260 *E5
C5261 *E5
C5262 *E5
C5263 *E5
C5264 *E5
C5265 *E5
C5266 *E5
C5267 *E5
C5268 *E5
C5269 *E5
C5270 *E5
C5271 *E5
C5272 *E5
C5273 *E5
C5274 *E5
C5275 *E5
C5276 *D6
C5277 *D6
C5278 F4
C5279 F3
C5280 *E4
C5281 *E6
C5282 *D5
C5283 *E5
C5284 *E5
C5285 *E5
C5286 *E4
C5287 *E5
C5288 *E5
C5289 *E5

C5290 *E5
C5291 *E5
C5292 *E4
C5293 *E4
C5294 *E4
C5295 *E4
C5296 *E4
C5297 *E4
C5298 *E4
C5299 *E4
C5300 *E4
C5301 *E4
C5302 *E4
C5303 *E4
C5304 *E4
C5305 *D4
C5306 *D4
C5307 *D4
C5308 *D4
C5309 *D4
C5310 *D4
C5311 *D5
C5312 *D4
C5313 *D4
C5314 *D5
C5315 *D5
C5316 *D5
C5317 *E4
C5318 *C6
C5319 *D5
C5320 *E5
C5321 *E5
C5322 *E5
C5323 *E5
C5324 *E5
C5325 *C6
C5326 *D5
C5327 *D5
C5328 *D5
C5329 *D5
C5330 *D5
C5331 *D5
C5332 *E5
C5333 *E5
C5334 *E5
C5335 *E5
C5336 *E5
C5337 *E5
C5338 *E5
C5339 *D5
C5340 *E5
C5401 *H5
C5402 *H5
C5403 *H5
C5404 *J5
C5405 *H5
C5406 *J4
C5407 *H5
C5408 *J5
C5409 *H4
C5410 *J5
C5411 *H4
C5412 *H4
C5413 *H4
C5414 *J5
C5415 *H4
C5416 *J4
C5417 *H4
C5418 *J4
C5419 *H4
C5420 *J4
C5421 *H5
C5422 *H4
C5423 *H4
C5424 *H6
C5425 *J6
C5426 *H5
C5427 *H5
C5428 *H5
C5429 *H5
C5430 *H5
C5431 *H5
C5432 *H5
C5433 *H5
C5434 *H5
C5435 *H5
C5436 *H5
C5437 *H5
C5438 *H5
C5439 *H5
C5440 *H5
C5441 *H5
C5442 *H5
C5443 *H5
C5444 *H5
C5445 *H5
C5446 *H5
C5447 *H5

C5448 *H5
C5449 *H5
C5450 *H5
C5451 *H5
C5452 *H5
C5453 *H5
C5454 *H5
C5455 *H5
C5456 *H5
C5457 *H5
C5458 *H5
C5459 *H5
C5460 *H5
C5461 *H5
C5462 *H5
C5463 *H5
C5464 *H5
C5465 *H5
C5466 *J5
C5467 *H5
C5468 *J5
C5469 *H5
C5470 *H5
C5471 *H5
C5472 *H5
C5473 *H5
C5474 *H5
C5475 *J5
C5476 H6
C5477 H6
C5478 J6
C5479 J6
C5480 *H4
C5481 *J6
C5482 *H5
C5483 *H5
C5484 *J5
C5485 *H5
C5486 *H4
C5487 *J5
C5488 *J5
C5489 *J5
C5490 *J5
C5491 *H5
C5492 *H5
C5493 *H5
C5494 *H4
C5495 *H4
C5496 *H4
C5497 *H4
C5498 *H4
C5499 *H4
C5500 *J4
C5501 *J4
C5502 *H4
C5503 *H4
C5504 *H4
C5505 *H4
C5506 *H4
C5507 *J4
C5508 *J4
C5509 *H4
C5510 *H4
C5511 *H4
C5512 *J4
C5513 *J4
C5514 *J5
C5515 *H4
C5516 *H5
C5517 *H4
C5518 *G6
C5519 *H5
C5520 *H5
C5521 *H5
C5522 *H5
C5523 *H5
C5524 *H5
C5525 *G6
C5526 *H5
C5527 *H5
C5528 *H5
C5529 *H5
C5530 *J5
C5531 *H5
C5532 *H5
C5533 *H5
C5534 *H5
C5535 *J5
C5536 *J5
C5537 *J5
C5538 *J5
C5539 *J5
C5540 *J5

CL704 D3
CL1001 *M4
CL1002 *N4
CL1400 H3
CL1401 H2
CL1402 H2
CL1403 H2
CL1404 H2
CL1405 H2
CL1406 H2
CL1407 H2
CL1901 E12
CL1902 E12
CL1903 D12
CL1904 D12
CL1905 P12
CL1906 P12
CL1907 M12
CL1908 M12
CL2001 E12
CL2002 D12
CL2003 P12
CL2004 M12
CL2801 R8
CL3001 E3
CL3201 C3
CL3401 J3
CL3601 F3
CL3801 *E10
CL3802 *E10
CL3803 F10
CL3804 E10
CL3805 *E10
CL3806 F10
CL3807 *E10
CL3808 *E10
CL3809 E10
CL3810 F10
CL3811 E10
CL3812 F10
CL3813 E10
CL3901 *P10
CL3902 *P10
CL3903 P10
CL3904 P10
CL3905 *P10
CL3906 P10
CL3907 *P10
CL3908 *P10
CL3909 P10
CL3910 P10
CL3911 P10
CL3912 P10
CL3913 P10
CL4001 *G11
CL4002 *G11
CL4003 H11
CL4004 G11
CL4005 *G11
CL4006 H11
CL4007 *G11
CL4008 *G11
CL4009 G11
CL4010 H11
CL4011 G11
CL4012 H11
CL4013 G11
CL4101 *K11
CL4102 *J11
CL4103 K11
CL4104 K11
CL4105 *K11
CL4106 K11
CL4107 *K11
CL4108 *K11
CL4109 K11
CL4110 K11
CL4111 K11
CL4112 K11
CL4113 K11
CL4201 *M11
CL4202 *M11
CL4203 M11
CL4204 M11
CL4205 *M11
CL4206 M11
CL4207 *M11
CL4208 *M11
CL4209 M11
CL4210 M11
CL4211 M11
CL4212 M11
CL4213 M11
CL4301 *D8
CL4302 *D8
CL4303 *D8
CL4304 *D8
CL4501 *K8

CN801 P3
CN802 L3
CN901 K1
CN902 K1
CN1001 J1
CN1801 G1
CNB1 B13
CNC1 C13
CNE1 E13
CNG1 G13
CNJ1 J13
CNL1 L13
CNN1 N13
D201 C12
D202 B12
D203 C1
D301 F1
D302 F1
D303 F1
D304 E1
D305 E1
D306 D1
D307 C1
D308 E1
D309 C1
D310 E1
D311 E1
D403 *H13
D404 *R11
D407 *C12
D408 *R10
D409 *C12
D410 *R12
D414 C1
D415 D1
D416 C1
D417 D1
D418 C1
D419 D1
D501 D9
D701 E1
D702 N1
D703 N1
D704 N1
D705 N1
D706 N1
D707 N1
D708 N1
D709 N1
D710 N1
D711 N1
D712 N1

CL4502 *K8
CL4503 *K8
CL4504 *K8
CL4701 *G8
CL4702 *G8
CL4703 *G8
CL4704 *G8
CL5001 R8
CL5002 R8
CL5003 R8
CL5004 R8
CL5005 R8
CL5006 R8
CL5007 R8
CL5008 R8
CL5009 R8
CL5010 R8
CL5011 R8
CL5012 R9
CL5013 R8
CL5014 R9
CL5015 R9
CL5016 R9
CL5017 R9
CL5018 R9
CL5019 R9
CL5020 R9
CL5201 D6
CL5202 D6
CL5203 D6
CL5204 D6
CL5205 D6
CL5206 D6
CL5207 D6
CL5208 D6
CL5401 G6
CL5402 G6
CL5403 G6
CL5404 G6
CL5405 G6
CL5406 G6
CL5407 G6
CL5408 G6

D713 N1
D714 N1
D715 N1
D716 N1
D717 N1
D718 C1
D719 B1
D720 F1
D721 B1
D1001 K1
D1002 K1
D1401 E1
D1402 G1
D1403 F1
D1404 F1
D1405 F1
D1406 F1
D1407 F1
D1408 F1
D1409 F1
D1410 E1
D1411 E1
D1412 E1
D1413 E1
DD201 B10
DD202 B9
DD203 B4
DD204 B8
DD205 B5
DD206 B4
DD207 B1
DD208 B6
DD209 B3
DD210 B11
DD211 B7
E1 F1
E2 A8
E3 A12
E4 A2
E5 K6
E6 K13
E7 P1
E8 R6
E9 P13
E10 C7
E21 *A2
E22 *A6
E23 *A11
E24 *H1
E25 *F7
E26 *H12
E27 *R1
E28 *R6
E29 *P12
E30 *M7
F201 B12
F202 A10
F203 A9
F204 A3
F205 A8
F206 A5
F207 A4
F208 A1
F209 A6
F210 A3
F211 A11
F212 A7
FB901 L4
FB901 K1
FB902 K2
FB903 K1
FB904 K2
FB2001 *F12
FB2002 *E12
FB2003 *F12
FB2004 *D12
FB2005 *P12
FB2006 *N12
FB2007 *P12
FB2008 *N12
FB2801 R8
FB3001 E4
FB3201 C3
FB3401 J4
FB3601 F4
FB3801 *E10
FB3901 *P11
FB4001 *G11
FB4101 *K11
FB4201 *M11
FB4301 *D9
FB4302 *D8
FB4303 *D8
FB4501 *M9

FB4502 *M9
FB4503 K9
FB4701 *J9
FB4702 *J9
FB4703 *J9
FB5001 *P9
FB5002 *N9
FB5003 *P9
FB5201 *E5
FB5401 *H5
IC1 D3
IC2 E11
IC3 N11
IC4 G11
IC5 J11
IC6 L11
IC7 E8
IC8 L9
IC9 H9
IC10 N8
IC11 E5
IC12 H5
IC21 H2
IC301 E1
IC302 E1
IC303 D1
IC304 D2
IC305 C2
IC306 D1
IC402 H12
IC403 R11
IC405 C12
IC406 R10
IC407 C12
IC408 R12
IC501 B12
IC502 B12
IC503 C8
IC504 L4
IC505 C9
IC506 D9
IC507 D8
IC701 C2
IC901 K1
IC902 M1
IC1001 R3
IC1002 *R2
IC1003 M4
IC1004 N4
IC1005 N4
IC1006 N4
IC1101 *F2
IC1102 *G2
IC1103 N3
IC1104 N4
IC1105 N3
IC1106 N4
IC1107 M3
IC1151 M2
IC1152 *G3
IC1153 N2
IC1154 N2
IC1201 E3
IC1202 M2
IC1203 F3
IC1204 F3
IC1205 G3
IC1601 G3
IC1701 H3
IC1702 J3
IC1703 H3
IC1704 K3
IC1705 J3
IC1801 G1
IC1802 H1
IC1803 H1
IC1901 F12
IC1902 D12
IC1903 P12
IC1904 N12
IC2801 P9
IC2802 N9
IC2803 R8
IC2901 P7
IC2902 N7
IC3001 F5
IC3002 F5
IC3003 E3
IC3101 F4
IC3102 F4
IC3201 C5
IC3202 C5
IC3203 C3
IC3301 C4
IC3302 C4
IC3401 K5
IC3402 K5

IC3403 J3
IC3501 K4
IC3502 K4
IC3601 G5
IC3602 G5
IC3603 F3
IC3701 G4
IC3702 G4
IC4301 *F9
IC4501 *M9
IC4701 G8
IC5001 *P8

L4001 *H12
L401 C11
L5001 *N8
L501 C8
L4002 F12
L402 *R11
L5002 *P8
L4003 H12
L5003 *P8
L4004 *F12
L5004 *P8
L4005 *H12
L5005 *N9
L4006 F12
L5006 *P9
L4007 H12
L5007 *M8
L4008 *F12
L5008 *M8
L4009 *H12
L5009 *E9
L4010 H11
L4011 *H12
L5010 *M8
L4012 *K12
L4013 K12
L5011 *E9
L4014 *H12
L5012 *M8
L4015 *F12
L4016 *H12
L4017 F12
L4018 F10
L4101 *K12
L4102 H12
L4103 K12
L4104 *H12
L4105 *K12
L4106 H12
L4107 K12
L4108 *H12
L4109 *K12
L4110 K11
L4111 H12
L4112 *H11
L4113 *H12
L4114 K11
L4115 *H12
L4116 *K11
L4117 H12
L4118 H11
L4201 *M12
L5201 *E6
L4202 K12
L4203 M12
L4204 *K12
L4205 *M12
L4206 K12
L4207 M12
L4208 *K12
L4209 *M12
L4210 M11
L4211 K12
L4212 *M11
L4213 *K12
L4214 M11
L4215 *K12
L4216 *M11
L4217 K12
L4218 K11
L4301 *F8
L4302 *F8
L4303 *E9
L4304 *E9
L4305 *D8
L4306 *D9
L4307 *E8
L4308 *E7
L5401 *J6
L4501 *M9
L4502 *M9
L4503 *L9
L4504 *L9
L4505 *K8
L4506 *K9
L4507 *L8
L4508 *L8
L4701 *G9
L4702 *G9

L4703	*G8	R203	A12	R331	*D1	R511	C8	R641	K11	R773	D4	R1002	L2	R1217	F2	R1466	J2	R1602	*E9	R1753	*J5	R2027	D12	R3203	C3	R4012	*H11	R5217	*E4	RB1161	*G3
L4704	*H8	R204	A12	R332	E1	R512	D8	R642	K11	R774	D4	R1003	L2	R1218	F2	R1467	*H3	R1603	*E9	R1754	*J5	R2028	D12	R3204	C3	R4013	*H11	R5218	D4	RB1162	*G3
L4705	*H8	R205	A12	R333	E1	R513	D8	R643	K11	R775	D4	R1004	L3	R1219	F2	R1468	J2	R1604	*E9	R1755	*D6	R2029	*P12	R3205	C3	R4014	*H11	R5219	*E4	RB1163	M1
L4706	*J8	R206	B11	R334	D1	R514	D8	R644	F11	R776	*E3	R1005	L3	R1221	F3	R1469	*H3	R1605	*E9	R1756	D6	R2030	*N12	R3206	C3	R4015	*H11	R5220	*D4	RB1164	N1
L4707	J9	R207	B10	R335	D1	R515	*C8	R645	F11	R777	*E3	R1006	L3	R1222	F3	R1470	H3	R1606	*E9	R1757	*H6	R2031	*P12	R3207	*C5	R4016	*G11	R5221	*E4	RB1165	N1
L4708	*J8	R208	B4	R336	D1	R516	D9	R646	F11	R778	D2	R1007	L3	R1223	F2	R1471	*H3	R1607	*E9	R1758	H6	R2032	*P12	R3208	*C5	R4017	*G11	R5222	D6	RB1166	N1
L4709	*G9	R209	B9	R337	*D1	R517	D8	R647	F11	R779	D2	R1008	L3	R1224	F2	R1472	H3	R1608	G4	R1759	*D6	R2033	*N12	R3209	*C5	R4018	*G11	R5223	E4	RB1167	N1
L4710	*H10	R210	B6	R338	D1	R518	D9	R648	F11	R780	*E3	R1009	*J2	R1225	G2	R1473	*H3	R1609	G4	R1760	D6	R2034	*N12	R3210	C6	R4019	*G11	R5224	D5	RB1168	N1
L4711	*H10	R211	*B10	R339	D1	R519	L4	R649	F11	R781	*E3	R1010	*J2	R1226	F2	R1474	H3	R1610	G4	R1761	*H6	R2035	*P12	R3211	C5	R4101	K11	R5401	*J5	RB1169	N1
L4712	*J9	R212	*B10	R340	D1	R520	D9	R650	F11	R782	D2	R1011	*J2	R1228	F3	R1475	*H3	R1611	G4	R1762	H6	R2036	*N12	R3301	*C4	R4102	K11	R5402	*G5	RB1170	P1
L3801	*F11	R213	*B9	R341	D1	R521	C8	R651	F11	R783	D2	R1012	*J2	R1229	G3	R1476	H2	R1612	G4	R1763	*D6	R2037	*P12	R3302	*C4	R4103	K11	R5403	*H4	RB1701	H4
L3802	D11	R214	*B9	R342	D1	R522	*C9	R652	F11	R784	D3	R1013	*J2	R1230	G2	R1477	*H3	R1613	H4	R1764	D6	R2038	*P12	R3303	*C4	R4104	K11	R5404	H4	RB1702	H4
L3803	F11	R215	*B3	R343	D1	R523	D9	R653	F11	R785	D3	R1014	*J2	R1231	G2	R1478	*H3	R1614	H4	R1765	*H6	R2039	*N12	R3304	*C4	R4105	K11	R5405	*H4	RB1703	J4
L3804	*D11	R216	*B3	R344	*D1	R524	D9	R654	F11	R786	D3	R1015	*J2	R1232	G2	R1479	H2	R1615	H4	R1766	H6	R2040	*N12	R3305	C5	R4106	*J12	R5406	*H4	RB1704	J4
L3805	*F11	R217	*B8	R345	D1	R525	*C9	R655	F11	R787	D3	R1016	*J2	R1233	G2	R1480	*H3	R1616	*G4	R1767	F5	R2041	P12	R3306	C4	R4107	*J12	R5407	*H4	RB1705	H4
L3806	D11	R218	*B8	R346	D1	R526	C8	R656	F11	R788	D2	R1017	K1	R1235	G3	R1481	*H3	R1617	*G4	R1768	E5	R2042	*P12	R3401	*K5	R4108	*J11	R5408	*H5	RB1706	H4
L3807	F11	R219	*B5	R347	D2	R527	C8	R657	F11	R789	D2	R1018	K1	R1236	E2	R1482	G2	R1618	*G4	R1769	J5	R2043	*P12	R3402	*K5	R4109	*J11	R5409	*J4	RB1707	K3
L3808	*D11	R220	*B5	R349	D2	R528	C8	R658	F11	R790	D3	R1019	K3	R1237	F2	R1483	H2	R1619	*G4	R1770	J5	R2044	*P12	R3403	J4	R4110	*J11	R5410	G5	RB1708	K3
L3809	*F11	R221	*B10	R350	D2	R529	L5	R659	*D8	R791	D3	R1020	K3	R1238	F2	R1484	*H3	R1620	*H4	R1801	*G1	R2045	N12	R3404	J4	R4111	*J11	R5411	H6	RB1709	J3
L3810	F11	R222	*B10	R351	*D2	R530	L5	R660	*L8	R792	D3	R1021	K2	R1239	G2	R1485	*H3	R1621	*H4	R1802	*G1	R2046	*N12	R3405	J3	R4112	*K11	R5412	H6	RB1710	J3
L3811	D11	R223	*B9	R352	F1	R531	L5	R661	*G8	R793	D3	R1022	K2	R1240	M2	R1486	H2	R1622	*H4	R1803	*G1	R2047	*N12	R3406	J3	R4113	*K11	R5413	*H6		
L3812	*F11	R224	*B9	R353	F1	R532	L5	R662	*H5	R794	*D3	R1023	J1	R1301	*D11	R1487	*H3	R1623	*G4	R1804	*G1	R2048	*N12	R3407	*K5	R4114	*K11	R5414	*H6	S501	K1
L3813	*D11	R225	*B3	R354	C1	R533	L5	R663	*J5	R795	*D3	R1024	H1	R1302	*E8	R1488	E1	R1624	*L8	R1805	G1	R2049	P12	R3408	*K5	R4115	*K11	R5415	*J5	S901	L1
L3814	F11	R226	*B3	R355	C1	R534	L5	R664	*D8	R796	*D3	R1025	R3	R1303	*L8	R1489	H2	R1625	*L8	R1806	*G1	R2050	P12	R3409	*K5	R4116	*K11	R5416	*G6	S902	M1
L3815	*D11	R227	*B8	R356	C1	R535	L5	R665	*K9	R797	*D3	R1026	R3	R1304	*N11	R1490	H2	R1626	*L9	R1807	*G1	R2051	N12	R3410	K5	R4117	*K11	R5417	*H4		
L3816	*F11	R228	*B8	R357	*C1	R536	L5	R666	J9	R798	D3	R1027	R3	R1305	*G8	R1491	H2	R1627	*L9	R1808	G1	R2052	N12	R3411	K5	R4118	*K11	R5418	H4	SORI01	A7
L3817	D11	R229	*B5	R358	C1	R537	C8	R701	D3	R799	D3	R1028	R3	R1306	*F11	R1492	H3	R1628	*L9	R1809	G1	R2053	P12	R3501	*K4	R4119	*K11	R5419	*H4	SORI02	R7
L3818	D10	R230	*B5	R359	C1	R538	D9	R702	D2	R800	*D3	R1029	R3	R1307	*J11	R1493	H2	R1629	*L9	R1810	H1	R2054	P12	R3502	*K5	R4201	M11	R5420	*H4		
L3901	*P11	R231	C11	R360	C2	R539	D9	R703	D2	R801	*D3	R1030	R3	R1308	P8	R1494	H3	R1630	*L9	R1811	G1	R2055	N12	R3503	*K4	R4202	M11	R5421	*H4	T1001	K3
L3902	M11	R232	C10	R361	C2	R540	*D8	R704	D3	R802	D3	R1031	*R2	R1309	*L11	R1495	H3	R1631	*L9	R1812	G1	R2056	N12	R3504	*K4	R4203	M11	R5422	*H6		
L3903	P11	R233	C4	R362	C2	R541	*C8	R705	D3	R803	*D3	R1032	*R2	R1310	*E5	R1496	H3	R1632	J9	R1813	G1	R2201	*E10	R3505	K4	R4204	M11	R5423	J4	TP201	C13
L3904	*M11	R234	C9	R363	*C2	R542	D3	R706	D3	R804	*D3	R1033	R3	R1311	*J5	R1497	H3	R1633	J9	R1814	G1	R2202	N10	R3506	K4	R4205	M11	R5424	G5	TP202	A12
L3905	*P11	R235	C6	R364	E1	R543	D3	R707	D3	R805	D2	R1034	R3	R1312	*E11	R1498	*H3	R1634	*G8	R1815	G1	R2203	G11	R3601	*G5	R4206	*L12			TP203	C11
L3906	N11	R236	B5	R365	E1	R544	D3	R708	D3	R806	*D2	R1035	*R2	R1401	H2	R1499	*H3	R1635	*G8	R1816	H1	R2204	J11	R3602	*G5	R4207	*L12	RB701	N1	TP204	C10
L3907	P11	R237	B2	R366	D1	R545	D3	R709	D3	R807	D2	R1036	*R2	R1402	H3	R1500	H3	R1636	G8	R1817	H1	R2205	L11	R3603	F4	R4208	*L11	RB702	N1	TP205	C4
L3908	*N11	R238	B7	R367	D1	R546	E3	R710	D3	R808	*D3	R1037	R3	R1403	H2	R1501	H3	R1637	G8	R1818	H1	R2251	J8	R3604	F4	R4209	*L11	RB703	N1	TP206	C9
L3909	*P11	R239	B3	R368	D1	R547	C9	R711	D3	R809	D2	R1038	R3	R1404	H2	R1502	H3	R1638	*G8	R1819	H1	R2252	*E8	R3605	F3	R4210	*L11	RB704	N1	TP207	C6
L3910	P11	R240	*B4	R369	*D1	R548	D9	R712	D3	R810	D3	R1039	*R2	R1405	H2	R1503	H3	R1639	*G8	R1820	H1	R2253	*L8	R3606	F3	R4211	*L11	RB901	K1	TP208	C5
L3911	N11	R241	*B4	R370	E1	R549	D8	R713	D3	R811	D3	R1040	*R2	R1406	H2	R1504	H3	R1640	*N9	R1821	H1	R2301	F8	R3607	*G5	R4212	*M11	RB902	P2	TP209	C2
L3912	*P11	R242	*B1	R371	E1	R550	C9	R714	D3	R812	D3	R1041	M4	R1407	H2	R1505	H3	R1641	*N9	R1822	H1	R2401	J9	R3608	*G5	R4213	*M11	RB903	P2	TP210	C7
L3913	*N11	R243	*B1	R402	H12	R551	D9	R715	D3	R813	D3	R1042	M4	R1408	H2	R1506	H3	R1642	*P8	R1823	H1	R2501	F8	R3609	*G5	R4214	*M11	RB904	P2	TP211	B3
L3914	P11	R244	*B6	R403	R11	R552	D8	R716	D3	R814	D3	R1043	M5	R1409	H2	R1507	H3	R1643	*P8	R1824	H1	R2502	K9	R3610	G6	R4215	*M11	RB905	P2	TP212	C11
L3915	*M11	R245	*B6	R408	H12	R553	E3	R717	D3	R815	D2	R1044	M5	R1410	*H2	R1508	H3	R1644	*P8	R1825	H1	R2601	H8	R3611	G5	R4216	*M11	RB906	*P2	TP213	C8
L3916	*P11	R246	*B2	R409	R11	R554	E3	R718	D3	R816	D2	R1045	M5	R1411	*H2	R1509	H3	R1645	*P8	R1826	H1	R2602	H8	R3701	*G4	R4217	*M11	RB907	*P2	TP402	*H12
L3917	M11	R247	*B4	R411	H12	R555	D3	R719	D3	R817	D3	R1046	M5	R1412	G2	R1510	J3	R1646	*P8	R1827	H1	R2603	*E5	R3702	*G4	R4218	*M11	RB908	*P2	TP403	R11
L3918	P11	R248	*B4	R412	H12	R556	E3	R720	D3	R818	D3	R1047	M5	R1413	*H2	R1511	J3	R1647	*P8	R1828	H1	R2604	*J5	R3703	*G4	R4219	*M11	RB909	*P2	TP405	C12
		R249	*B1	R413	R11	R557	E3	R721	D3	R819	E1	R1048	M5	R1414	G2	R1512	H3	R1701	*E11	R1829	H1	R2701	*E10	R3704	*G4	R4301	*E8	RB910	P3	TP406	R10
Q201	C12	R250	*B1	R414	R11	R558	D3	R722	D3	R820	D3	R1049	M5	R1415	*H2	R1513	H3	R1702	*E11	R1830	H1	R2702	*P10	R3705	G5	R4302	*E8	RB911	P3	TP407	C12
Q301	*E1	R251	*B6	R415	H12	R559	D3	R723	D3	R821	D2	R1050	M5	R1416	G2	R1514	H3	R1703	*D10	R1831	H1	R2703	*G11	R3706	G4	R4303	*F9	RB912	P3	TP408	R11
Q501	D9	R252	*B6	R416	R11	R560	D3	R724	E3	R822	E3	R1051	M5	R1417	*H2	R1515	H3	R1704	*D10	R1832	H1	R2704	*J11	R3801	E11	R4304	*F9	RB913	P3	TP501	B13
Q202	B11	R253	*B2	R418	H12	R561	D3	R725	E3	R823	E3	R1052	M5	R1418	G2	R1516	G3	R1705	*G11	R1833	H1	R2705	*L11	R3802	E10	R4305	*E9	RB914	P2	TP502	R4
Q302	*E1	R254	*B2	R419	R11	R562	D3	R726	E2	R824	E3	R1053	M5	R1419	*H2	R1517	H3	R1706	*G11	R1834	H1	R2801	*P9	R3803	E10	R4501	*L8	RB915	P2	TP1001	R4
Q203	B10	R255	C5	R421	C12	R563	D3	R727	D2	R825	E3	R1054	M5	R1420	G2	R1518	G3	R1707	*F11	R1835	*H5	R2802	*N9	R3804	E10	R4502	*L8	RB916	P2	TP1002	R4
Q303	*E1	R256	C2	R422	R10	R564	D3	R728	E2	R826	E3	R1055	M5	R1421	*H2	R1519	H3	R1708	*G11	R1836	*J11	R2803	R8	R3805	E10	R4503	*M9	RB917	*P3		
Q204	B4	R257	C7	R427	C12	R565	*D3	R729	E2	R827	E3	R1056	M5	R1422	G2	R1520	G3	R1709	*J11	R1837	H3	R2804	R8	R3806	*E11	R4504	*M9	RB918	*P3	X501	L4
Q304	E1	R258	C3	R428	R10	R566	E3	R730	E3	R828	E3	R1057	M5	R1423	*H2	R1521	H3	R1710	*J11	R1838	*N11	R2805	R8	R3807	*E11	R4505	*L9	RB919	*P3		
Q404	C1	R259	B12	R430	C12	R567	E3	R731	*D3	R829	E3	R1058	N4	R1424	*H2	R1522	G3	R1711	*J11	R1839	*G11	R2806	R8	R3808	*D11	R4701	G8	RB920	*P3		
Q205	B9	R260	*B11	R431	C12	R568	B12	R732	E3	R830	E3	R1059	M4	R1425	H2	R1523	H3	R1712	*J11	R1840	*L11	R2807	*P9	R3809	*E11	R4702	G8	RB921	*P2		
Q305	*D1	R261	*B11	R432	C12	R601	*E11	R733	D3	R831	E3	R1060	N4	R1426	*H2	R1524	G3	R1713	*D10	R1841	*E11	R2808	*P9	R3810	*E10	R4703	G8	RB922	*P2		
Q405	D1	R262	*B11	R433	R10	R602	*E11	R734	D3	R832	E3	R1061	N5	R1427	*H2	R1525	H3	R1714	*D10	R1842	M3	R2809	*P9	R3811	*E10	R4704	G8	RB923	*P2		
Q206	B6	R263	*B11	R434	R10	R603	*N11	R735	D3	R833	E3	R1062	N5	R1428	*H2	R1526	G3	R1715	*F11	R1843	M3	R2810	*P9	R3812	*F10	R4705	*G8	RB924	*P3		
Q306	D1	R264	C11	R435	R10	R604	*P11	R736	D3	R834	E3	R1063	N5	R1429	*H2	R1527	H3	R1716	*F11	R1844	M3	R2811	*N9	R3813	*F10	R4706	*G8	RB925	*P3		
Q406	C1	R265	B8	R437	C12	R605	*J11	R737	D3	R835	E3	R1064	N5	R1430	*H2	R1528	H3	R1717	*J11	R1845	M2	R2812	*N9	R3814	*F10	R4707	*G8	RB926	*P3		
Q207	B5	R266	*B7	R438	R10	R606	*J11	R738	D3	R836	E3	R1065	N5	R1431	H2	R1529	H3	R1718	*J11	R1846	*L8	R2813	*N9	R3815	*F10	R4708	*G8	RB1101	*F2		
Q307	*E1	R267	*B7	R439	C12	R607	*D10	R739	D3	R837	E3	R1066	N5	R1432	*H2	R1530	H3	R1719	*E10	R1847	*E8	R2814	*N9	R3816	*F10	R4709	G8	RB1102	*F2		
Q407	D1	R268	*B7	R440	R12	R608	*N11	R740	D3	R838	E3	R1067	N5	R1433	*H2	R1531	G1	R1720	*E10	R1848	M3	R2815	P10	R3817	*F10	R4710	G8	RB1103	*G2		
Q208	C2	R269	*B7	R442	C12	R609	*J11	R741	D2	R839	E3	R1068	N5	R1434	*H2	R1532	H3	R1721	*G11	R1849	M3	R2816	N9	R3818	*E10	R4711	*H8	RB1104	*G2		
Q308	E1	R270	C8	R443	R12	R610	D10	R742	D4	R840	E3	R1069	N5	R1435	*H2	R1533	H3	R1722	*G11	R1850	*H9	R2901	*P7	R3819	*E10	R5001	*P8	RB1105	*G2		
Q408	C1	R301	*C1	R444	C12	R611	D10	R743	E2	R841	C2	R1070	N5	R1436	H2	R1534	H3	R1723	*J11	R1851	*E5	R2902	*N7	R3901	P11	R5002	*P8	RB1106	*G2		
Q209	B7	R302	*C1	R445	C12	R612	D10	R744	D2	R842	C2	R1071	N5	R1437	*H2	R1535	H3	R1724	*J11	R1852	M3	R2903	*P8	R3902	P11	R5003	*N9	RB1107	*G2		
Q309	*D1	R303	*C1	R446	C12	R613	D10	R745	D4	R843	C2	R1072	N5	R1438	*H2	R1536	H3	R1725	*E10	R1853	H1	R2904	*P8	R3903	P11	R5004	*N9	RB1108	N3		
Q409	D1	R304	E1	R447	R11	R614	D10	R746	D2	R844	C2	R1073	P5	R1439	H2	R1537	J3	R1726	*E10	R1854	H1	R2905	*P8	R3904	P10	R5005	*N9	RB1109	N3		
Q210	B3	R305	E1	R448	R11	R615	D10	R747	D3	R845	C2	R1074	P5	R1440	*H2	R1538	J3	R1727	*G11	R2001	*F12	R2906	*P8	R3905	P11	R5006	*N9	RB1110	N3		
Q310	D1	R306	E1	R449	R11	R616	N10	R748	D4	R846	C2	R1075	P5	R1441	H3	R1539	*H3	R1728	*G11	R2002	*E12	R2907	*N8	R3906	*N11	R5007	*P9	RB1111	P3		
Q410	*C1	R307	*E1	R455	C12	R617	N11	R749	E2	R847	E3	R1076	P5	R1442	H3	R1540	H3	R1729	*J11	R2003	*F12	R2908	*N8	R3907	*N11	R5008	*P9	RB1112	N3		
Q211	B12	R308	F1	R456	R11	R618	N10	R750	D3	R848	E3	R1077	M5	R1443	H2	R1541	J3	R1730	*J11	R2004	*F12	R2909	*N8	R3908	*N11	R5009	*P8	RB1113	N3		
Q311	*D1	R309	F1	R464	C1	R619	N10	R751	D4	R849	*D3	R1078	M5	R1444	H2	R1542	J3	R1731	*P11	R2005	*E12	R2910	*N8	R3909	*N11	R5010	*P8	RB1114	P3		
Q411	*C1	R310	E1	R465	D1	R620	N10	R752	D4	R850	*D3	R1079	N5	R1445	H3	R1543	*H3	R1732	*P11	R2006	*D12	R2911	N7	R3910	*N10	R5011	*N8	RB1115	M3		
Q212	B8	R311	E1	R466	C1	R621	N10	R753	E2	R852	D3	R1080	N5	R1446	H3	R1544	H3	R1733	*N10	R2007	*F12	R2912	N7	R3911	*N10	R5012	*N8	RB1116	N3		
Q312	D1	R312	E1	R467	D1	R622	H11	R754	D4	R853	D3	R1081	N5	R1447	G2	R1545	H3	R1734	*N10	R2008	*E12	R3001	*F5	R3912	*P10	R5013	*N8	RB1117	N3		
Q412	*C1	R313	*E1	R468	C1	R623	H11	R755	D4	R901	L1	R1082	N5	R1448	H2	R1546	H3	R1735	*L11	R2009	*F12	R3002	*F5	R3913	*P10	R5014	*N8	RB1118	N3		
Q313	*D1	R314	F1	R469	D1	R624	H11	R756	D4	R902	L1	R1083	N5	R1449	*G3	R1547	H3	R1736	*L11	R2010	*F12	R3003	E4	R3914	*P10	R5019	*P8	RB1119	N3		
Q413	*D1	R315	F1	R470	*C1	R625	H11	R757	D4	R903	P3	R1084	N5	R1450	*G3	R1548	H3	R1737	*L11	R2011	*E12	R3004	F4	R3915	*P10	R5201	*E5	RB1120	N3		
Q314	*D1	R316	E1	R471	*C1	R626	H11	R758	E3	R904	P3	R1201	E3	R1451	*G3	R1549	F1	R1738	*L11	R2012	*D12	R3005	E3	R3916	*P10	R5202	*D5	RB1121	N3		
Q414	*D1	R317	E1	R472	*C1	R627	*P9	R759	*D3	R905	P3	R1202	E2	R1452	*G3	R1550	F1	R1739	*N10	R2013	F12	R3006	E3	R3917	*P10	R5203	*E4	RB1122	M3		
Q315	*D2	R318	D1	R473	*D1	R628	*D5	R760	*D3	R906	P3	R1203	E2	R1453	*G3	R1551	F1	R1740	*N10	R2014	*F12	R3007	*F5	R3918	*P10	R5204	D4	RB1123	M3		
Q415	*D1	R319	*D1	R474	*D1	R629	*E5	R761	D4	R907	R3	R1204	E2	R1454	*G3	R1552	F1	R1741	*L11	R2015	*F12	R3008	*F5	R3919	*P10	R5205	*E4	RB1124	M3		
Q316	*D2	R320	F1	R475	*D1	R630	N9	R762	D4	R908	R3	R1205	N2	R1455	*G3	R1553	F1	R1742	*L11	R2016	*F12	R3009	*F5	R4001	G11	R5206	*D4	RB1125	M3		
Q317	*C1	R321	F1	R501	B13	R631	N7	R763	*D3	R909	R3	R1206	M2	R1456	*G3	R1554	F1	R1743	*N11	R2017	D12	R3010	F5	R4002	G11	R5207	*E4	RB1151	*G3		
Q318	*C1	R322	E1	R502	D8	R632	*L12	R764	D4	R910	R3	R1207	M2	R1457	*G3	R1555	F1	R1744	*N10	R2018	*E12	R3011	F5	R4003	G11	R5208	*D5	RB1152	*G3		
Q319	*C2	R323	E1	R503	D8	R633	*L11	R765	D4	R911	R3	R1208	M2	R1458	*G3	R1556	E1	R1745	*L11	R2019	*E12	R3101	*F4	R4004	G11	R5209	*E4	RB1153	*G3		
Q320	*C2	R324	D1	R504	D8	R634	*G11	R766	E3	R912	R3	R1209	E2	R1459	*G3	R1557	E1	R1746	*L11	R2020	*E12	R3102	*F5	R4005	G11	R5210	D5	RB1154	*G3		
Q321	*D1	R325	*E1	R505	*C8	R635	*G11	R767	D4	R913	P3	R1210	M2	R1460	*G3	R1558	E1	R1747	*N10	R2021	F12	R3103	*F4	R4006	*G12	R5211	D6	RB1155	M1		
Q322	*D1	R326	E1	R506	D9	R636	*L11	R768	E4	R914	M1	R1212	M3	R1461	J2	R1559	E1	R1748	*P10	R2022	F12	R3104	*F4	R4007	*G12	R5212	D6	RB1156	M1		
Q1401	G1	R327	E1	R507	D9	R637	*F11	R769	D4	R915	M1	R1213	E3	R1462	J2	R1560	G1	R1749	*L11	R2023	E12	R3105	F4	R4008	*F11	R5213	D6	RB1157	M1		
		R328	D1	R508	B13	R638	K11	R770	E4	R916	M1	R1214	N3	R1463	J2	R1561	H2	R1750	*L11	R2024	E12	R3106	F4	R4009	*G11	R5214	D6	RB1158	*G3		
R201	C12	R329	D1	R509	C8	R639	K11	R771	D4	R917	M1	R1215	F3	R1464	J2	R1562	H2	R1751	*E5	R2025	E12	R3201	*C5	R4010	*G11	R5215	*E5	RB1159	M1		
R202	C12	R330	D1	R510	C8	R640	K11	R772	D4	R1001	L2	R1216	F2	R1465	J2	R1601	*E8	R1752	*E5	R2026	F12	R3202	*C5	R4011	*G11	R5216	D6	RB1160	*G3		

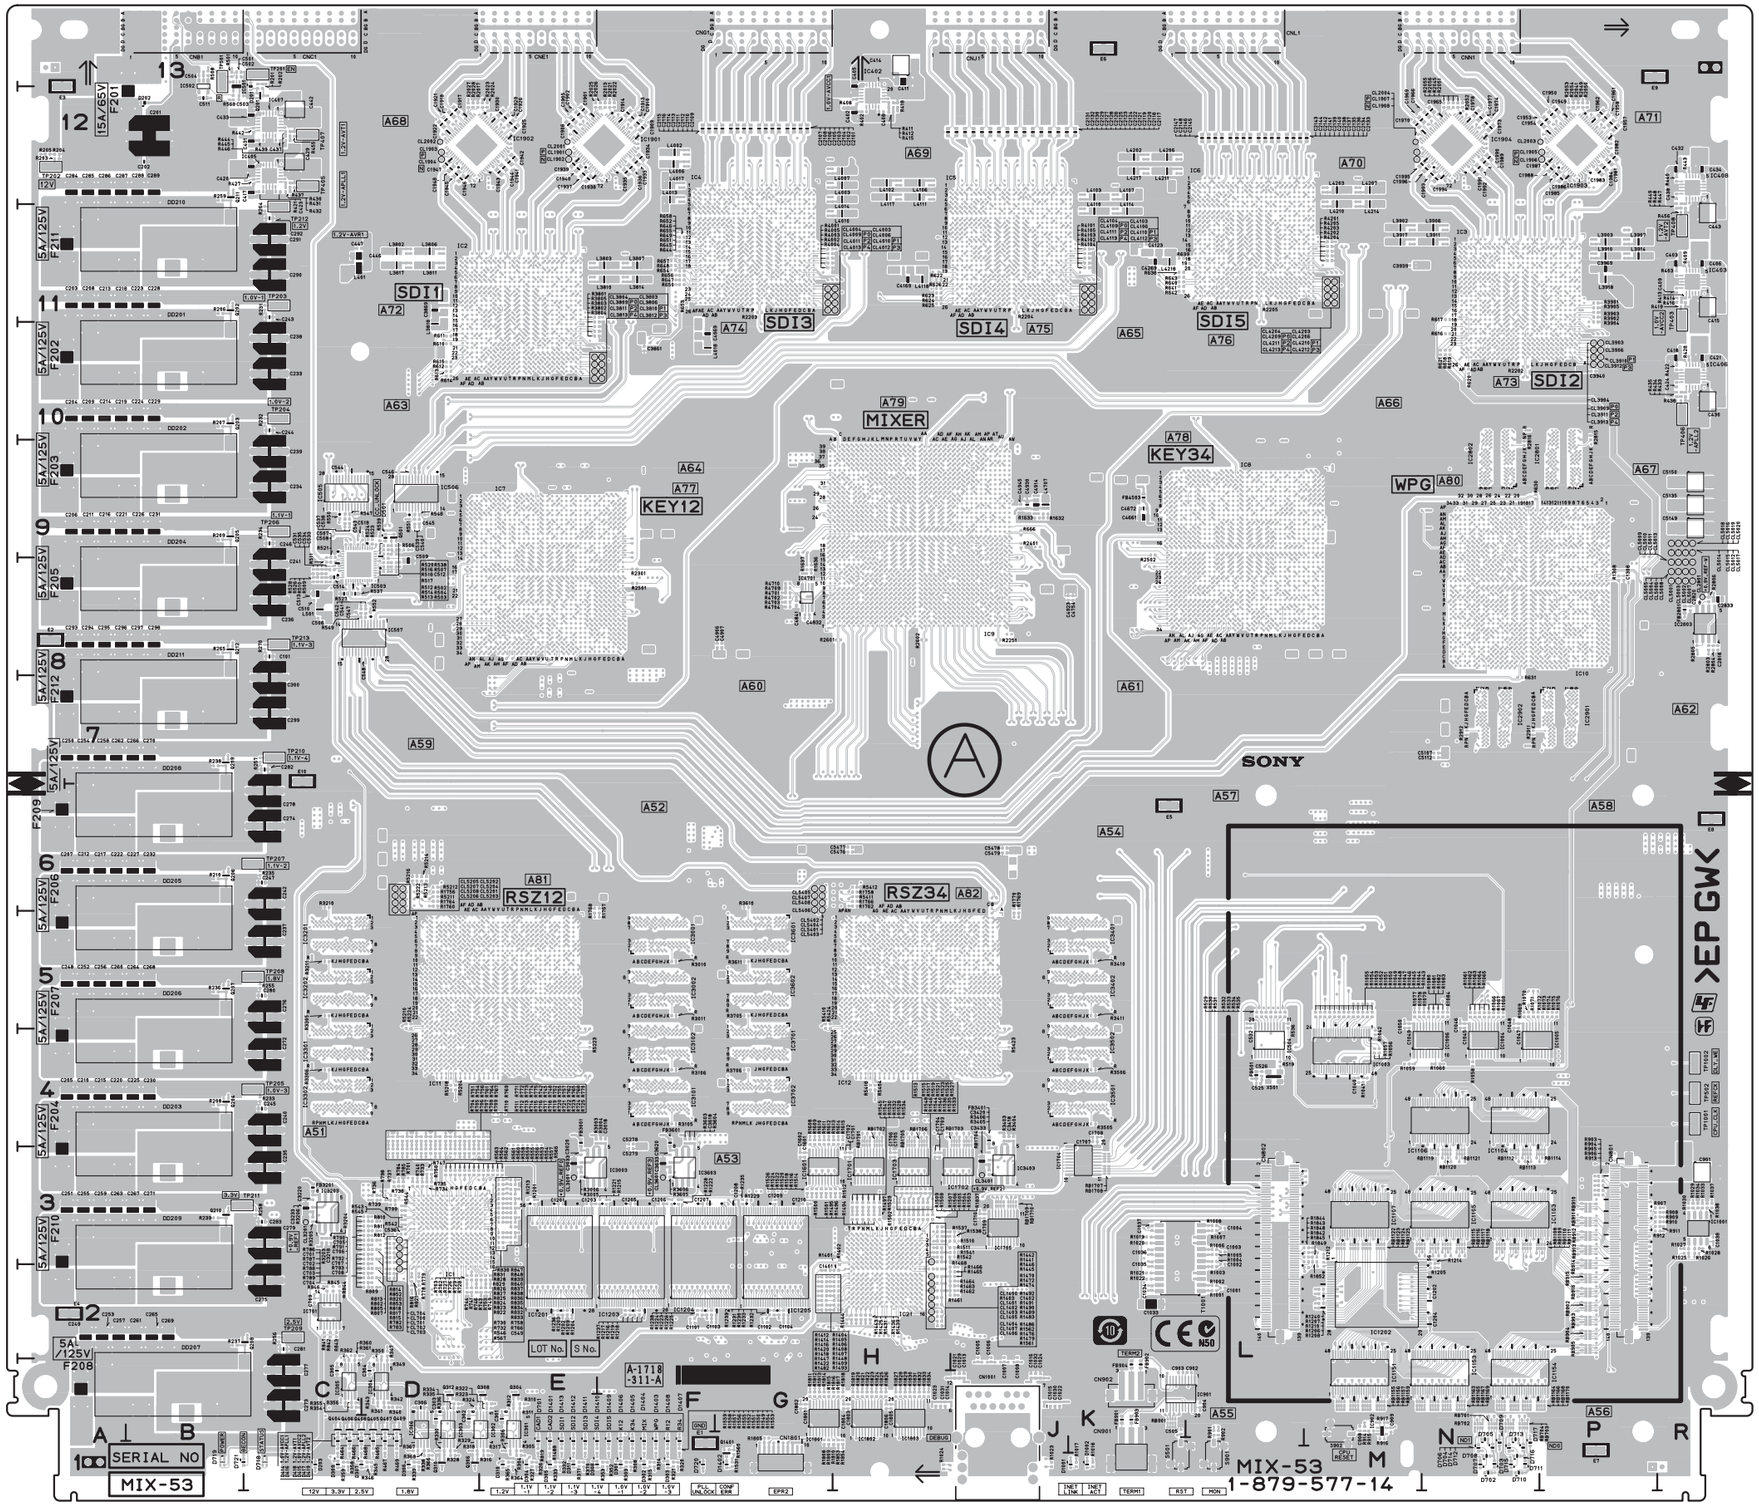

MIX-53 -A SIDE-
SUFFIX: -14

5-22 (a) 5-22 (a)

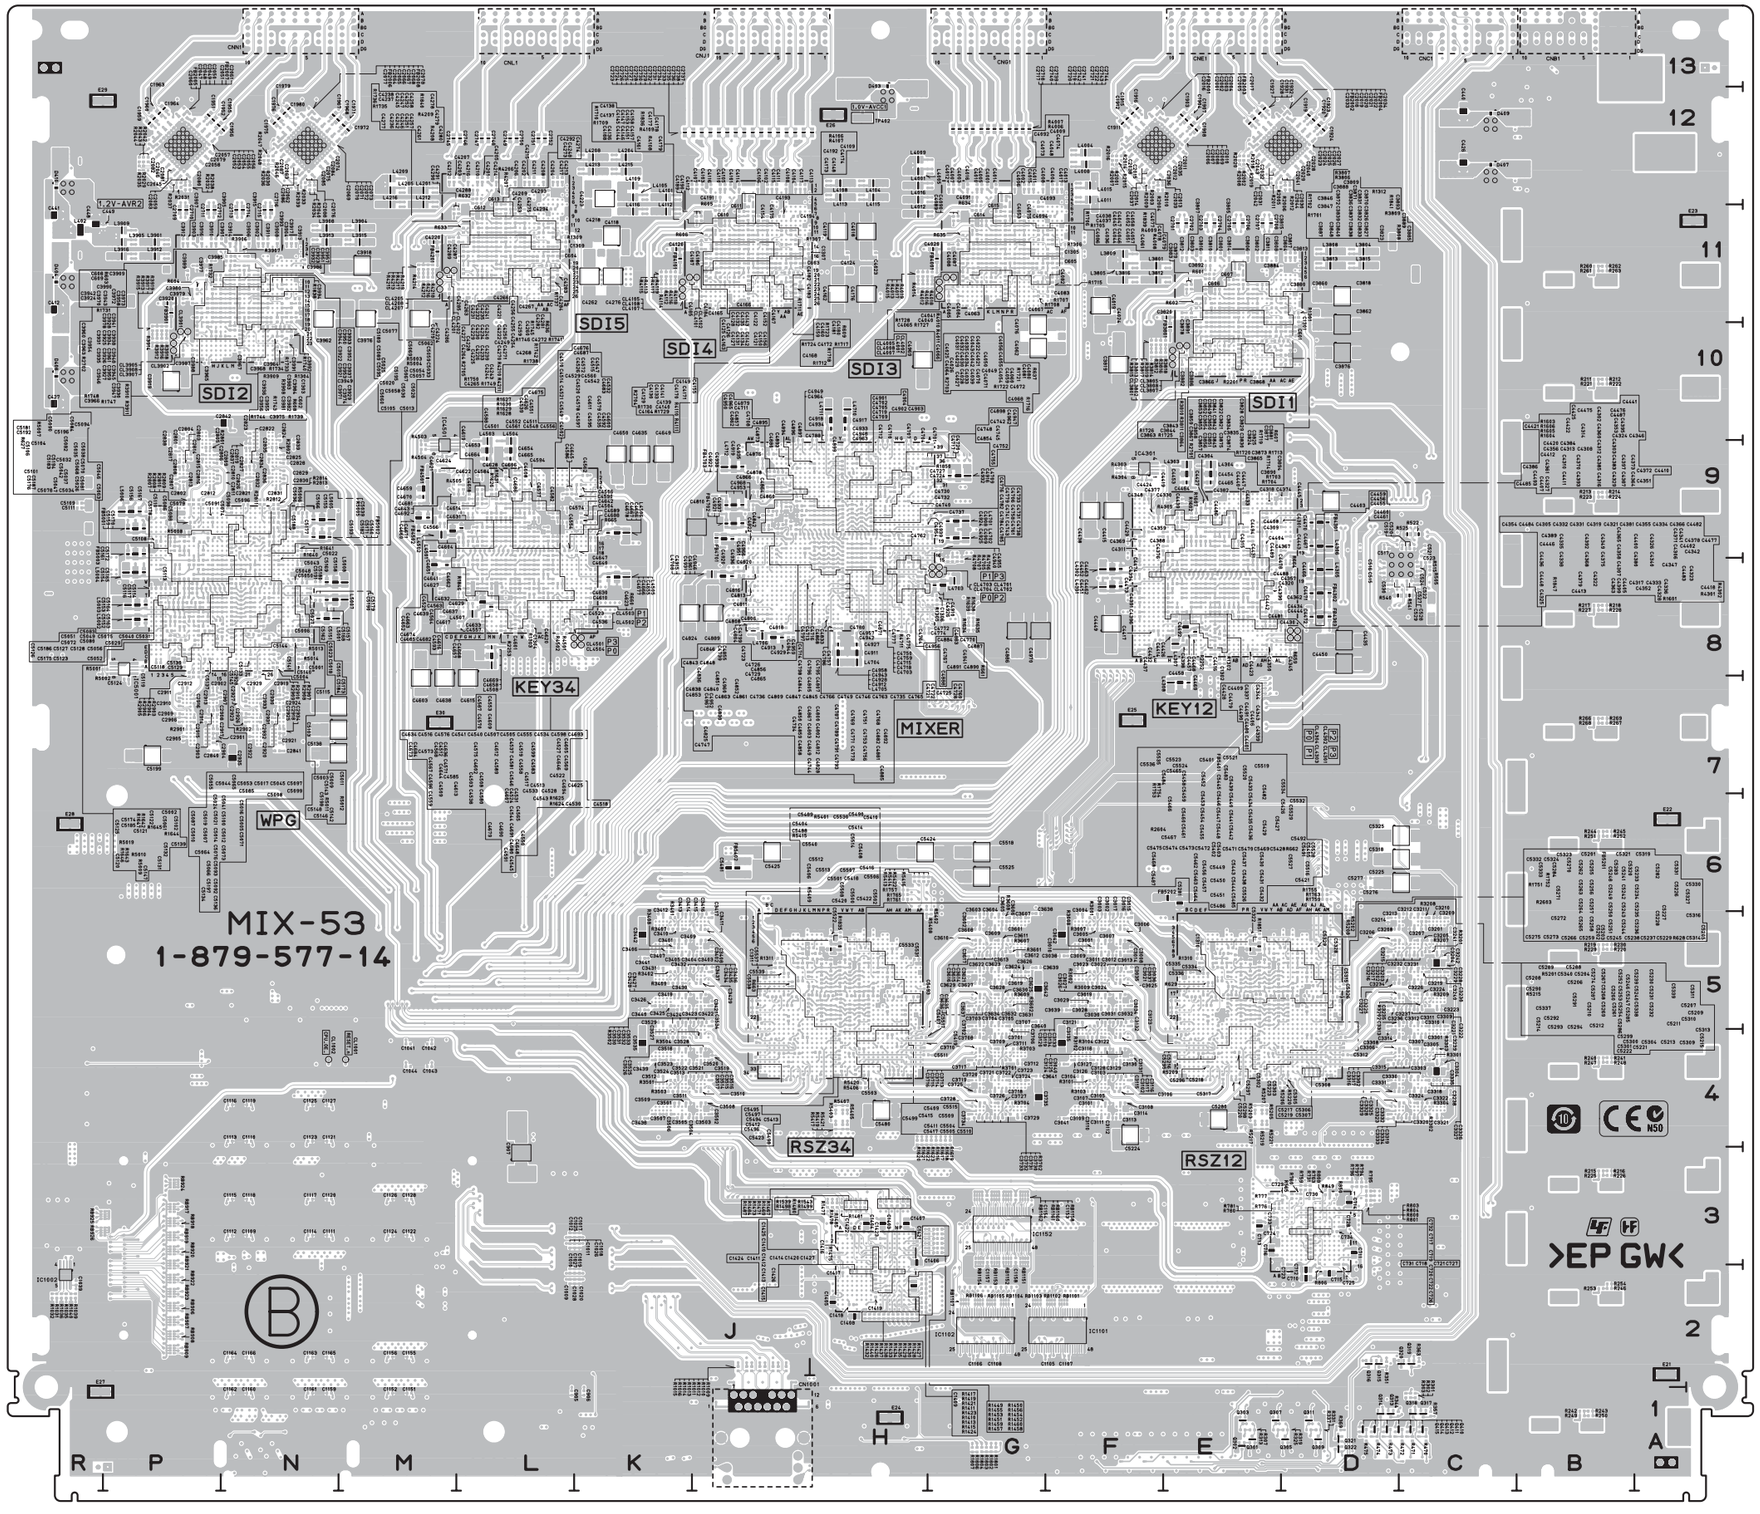

MIX-53 -B SIDE-
SUFFIX: -14

MIX-53 (1-879-577-14)
---
*:B SIDE

C101	C8	C298	B8	C607	*E11	C1047	N5	C1701	H3	C1983	P12	C2085	*N12	C2747	*L12	C3016	*F5	C3237	*C5	C3516	*J4	C3802	*E11	C3906	*N11	C4010	*G12	C4114	*J12	C4218	*K12
C201	B12	C299	C7	C608	*N11	C1048	N5	C1702	H3	C1984	P12	C2086	*N12	C2748	*L12	C3017	*F5	C3238	*C4	C3517	*J4	C3803	*E11	C3907	*P11	C4011	*G12	C4115	*J12	C4219	*M11
C202	B12	C300	C7	C609	*N11	C1049	M5	C1703	H3	C1985	P12	C2087	*N12	C2749	*L12	C3018	F4	C3239	*C4	C3518	*K4	C3804	*D11	C3908	*N11	C4012	*G12	C4116	*J12	C4220	*M11
C203	A11	C301	E1	C610	*J11	C1050	M5	C1704	H3	C1986	P12	C2088	*N12	C2750	*L12	C3019	*F5	C3240	*C5	C3519	*J4	C3805	*E11	C3909	*N11	C4013	*F12	C4117	*J12	C4221	*L11
C204	A10	C302	D1	C611	*J11	C1101	F2	C1705	H3	C1987	P12	C2101	G12	C2751	*L12	C3020	E3	C3241	*C5	C3520	*J4	C3806	*E11	C3910	*P11	C4014	*G12	C4118	*K11	C4222	*L11
C205	A4	C303	D1	C612	*L12	C1102	G2	C1706	H3	C1988	P12	C2102	G12	C2752	*L12	C3021	*F5	C3242	*C5	C3521	*K4	C3807	*E11	C3911	*N11	C4015	*G12	C4119	*H11	C4223	*K12
C206	A9	C304	D2	C613	*L12	C1103	F2	C1707	K4	C1989	N12	C2103	G12	C2801	*P9	C3022	*F5	C3301	*C4	C3522	*K4	C3808	*E11	C3912	*P11	C4016	*G12	C4120	*K11	C4224	*M11
C207	A6	C305	C2	C614	*G11	C1104	G2	C1708	K4	C1990	N12	C2104	G12	C2802	*P9	C3023	*F5	C3302	*C4	C3523	*K4	C3809	*E11	C3913	*N11	C4017	*F12	C4121	*J11	C4225	*L11
C208	A11	C306	D1	C615	*G11	C1105	*F2	C1709	J3	C1991	N12	C2105	G12	C2803	*P9	C3024	*F5	C3303	*C4	C3524	*K4	C3810	*E11	C3914	*N11	C4018	*H11	C4122	*J11	C4226	*L11
C209	A10	C402	H12	C701	D3	C1106	*G2	C1710	J3	C1992	N12	C2106	G12	C2804	*P10	C3025	*F5	C3304	*C4	C3525	*J4	C3811	*E11	C3915	*N11	C4019	*F11	C4123	K11	C4227	*L11
C210	A4	C403	R11	C702	D2	C1107	*F2	C1801	G1	C1993	N12	C2107	G12	C2805	*P10	C3026	*F5	C3305	*C4	C3526	*K4	C3812	*E11	C3916	*P11	C4020	*G11	C4124	*H11	C4228	*L11
C211	A9	C405	H12	C703	D2	C1108	*G2	C1802	G1	C1994	N12	C2108	G12	C2806	*P9	C3027	*F5	C3306	*C4	C3527	*J4	C3813	*D11	C3917	*N11	C4021	*G11	C4125	*J11	C4229	*L11
C212	A6	C406	R11	C704	D2	C1109	*N3	C1803	H1	C1995	N12	C2109	G12	C2807	*P9	C3028	*F5	C3307	*C4	C3528	*K4	C3814	*E11	C3918	*M11	C4022	*G11	C4126	*J11	C4230	*L11
C213	A11	C408	H12	C705	D3	C1110	*N4	C1804	H1	C1996	N12	C2110	G12	C2808	*P9	C3029	*F5	C3308	*D4	C3529	*K5	C3815	*E11	C3919	*P10	C4023	*H11	C4127	*J11	C4231	*L11
C214	A10	C409	R11	C706	D3	C1111	*N3	C1805	H1	C2001	*F12	C2111	G12	C2809	*P9	C3030	*F5	C3309	*C5	C3530	*K5	C3816	*E11	C3920	*P11	C4024	*F11	C4128	*J11	C4232	*L11
C215	A4	C411	H13	C707	D3	C1112	*N3	C1806	H1	C2002	*F12	C2112	G12	C2810	*P9	C3031	*F5	C3310	*C5	C3531	*K5	C3817	*D11	C3921	*N11	C4025	*G11	C4129	*J11	C4233	*L11
C216	A9	C412	*R11	C708	D3	C1113	*N4	C1901	E12	C2003	*F12	C2113	G12	C2811	*P9	C3032	*F5	C3311	*C5	C3532	*J5	C3818	*D11	C3922	*N11	C4026	*G11	C4130	*J11	C4234	*L11
C217	A6	C414	H13	C709	C2	C1114	*N3	C1902	E12	C2004	*F12	C2114	G12	C2812	*P9	C3033	E3	C3312	*C5	C3533	*J5	C3819	*F10	C3923	*N11	C4027	*G11	C4131	*J11	C4235	*L11
C218	A11	C415	R11	C710	*D2	C1115	*N3	C1903	*E12	C2005	*F12	C2115	F12	C2813	*P9	C3034	*F5	C3313	*C5	C3534	*J5	C3820	*E11	C3924	*P11	C4028	*G11	C4132	*J11	C4236	*L11
C219	A10	C417	C12	C711	*D3	C1116	*N4	C1904	*E12	C2006	*E12	C2116	F12	C2814	*P9	C3035	*F5	C3314	*D5	C3535	*K4	C3821	*E10	C3925	*P11	C4029	*G11	C4133	*J11	C4237	*L11
C220	A4	C418	R10	C712	*D2	C1117	*N3	C1905	E12	C2007	*E12	C2117	K12	C2815	*P9	C3036	*F5	C3315	*D4	C3601	*G5	C3822	*E11	C3926	*P11	C4030	*G11	C4134	*J11	C4238	*L11
C221	A9	C420	C12	C713	*E3	C1118	*N3	C1906	E12	C2008	*E12	C2118	J12	C2816	*P9	C3037	*F5	C3316	*D4	C3602	*G5	C3823	*E11	C3927	*P11	C4031	*G11	C4135	*J11	C4239	*L11
C222	A6	C421	R10	C714	*D3	C1119	*N4	C1907	*E12	C2009	*E12	C2119	J12	C2817	*P9	C3038	*F5	C3317	*C4	C3603	*G5	C3824	*E10	C3928	*N11	C4032	*G11	C4136	*J11	C4240	*L11
C223	B11	C423	C12	C715	*D2	C1120	*N3	C1908	*E12	C2010	*E12	C2120	J12	C2818	R8	C3039	*F5	C3318	*C4	C3604	*G5	C3825	*E10	C3929	*N11	C4033	*G11	C4137	*J11	C4241	*L11
C224	B10	C424	R10	C716	*E3	C1121	*N4	C1909	F12	C2011	*E12	C2121	J12	C2819	*N9	C3040	*F4	C3319	*C4	C3605	*G5	C3826	*E11	C3930	*N10	C4034	*G11	C4138	*J11	C4242	*L11
C225	B4	C426	*C12	C717	*D3	C1122	*M3	C1910	F12	C2012	*E12	C2122	J12	C2820	R8	C3041	*F4	C3320	*C4	C3606	*G5	C3827	*E11	C3931	*P11	C4035	*G11	C4139	*J11	C4243	*L11
C226	B9	C427	*R10	C718	*D3	C1123	*N4	C1911	*F12	C2013	*F12	C2123	J12	C2821	*N9	C3042	*F5	C3321	*C4	C3607	*G5	C3828	*E11	C3932	*N11	C4036	*G11	C4140	*J11	C4244	*L11
C227	B6	C429	C12	C719	*D3	C1124	*M3	C1912	*F12	C2014	*F12	C2124	J12	C2822	*N9	C3101	*F4	C3322	*C4	C3608	*G5	C3829	*E10	C3933	*N11	C4037	*G11	C4141	*J11	C4245	*L11
C228	B11	C430	R10	C720	*D3	C1125	*N4	C1913	F12	C2015	*F12	C2125	J12	C2823	*N10	C3102	*F4	C3323	*C4	C3609	*G5	C3830	*E10	C3934	*N11	C4038	*G11	C4142	*J11	C4246	*L11
C229	B10	C431	C12	C721	*D3	C1126	*M3	C1914	F12	C2016	*F12	C2126	J12	C2824	*N10	C3103	*F4	C3324	*C4	C3610	*G5	C3831	*E11	C3935	*P11	C4039	*G11	C4143	*J11	C4247	*L11
C230	B4	C432	R12	C722	*D3	C1127	*N4	C1915	*F12	C2017	*F12	C2127	J12	C2825	*N9	C3104	*F4	C3325	*D4	C3611	*G5	C3832	*E11	C3936	*N11	C4040	*G11	C4144	*J11	C4248	*L11
C231	B9	C433	C12	C723	*D2	C1128	*M3	C1916	*F12	C2018	*E12	C2128	J12	C2826	*N9	C3105	*F4	C3326	*C4	C3612	*G5	C3833	*E11	C3937	*N11	C4041	*G11	C4145	*J11	C4249	*L11
C232	B6	C434	R12	C724	*E3	C1151	*M1	C1917	D12	C2019	*E12	C2129	J12	C2827	*N9	C3106	*F4	C3327	*C4	C3613	*G5	C3834	*E10	C3938	*N11	C4042	*G11	C4146	*J11	C4250	*L11
C233	C10	C437	C12	C725	*D2	C1152	*M1	C1918	D12	C2020	*E12	C2130	J12	C2828	*N9	C3107	*F4	C3328	*C4	C3614	*G5	C3835	*E10	C3939	M11	C4043	*G11	C4147	*J11	C4251	*L11
C234	C9	C438	R12	C726	*D3	C1153	*G3	C1919	*D12	C2021	*E12	C2131	H12	C2829	*N9	C3108	*F4	C3329	*C4	C3615	*G5	C3836	*E11	C3940	P10	C4044	*G11	C4148	*J11	C4252	*L11
C235	C3	C440	*C12	C727	*D3	C1154	*G3	C1920	*D12	C2022	*E12	C2132	J12	C2830	*N9	C3109	*F4	C3330	*C4	C3616	*G5	C3837	*E11	C3941	*N11	C4045	*G11	C4149	*J11	C4253	*L11
C236	C8	C441	*R11	C728	*D3	C1155	*M2	C1921	D12	C2023	*D12	C2133	M12	C2831	*N9	C3110	*F4	C3331	*D4	C3617	*G5	C3838	*E11	C3942	*P11	C4046	*G11	C4150	*J11	C4254	*L11
C237	C5	C442	C12	C729	*D3	C1156	*M2	C1922	D12	C2024	*D12	C2134	L12	C2832	*N9	C3111	*F4	C3332	*D4	C3618	F4	C3839	*E11	C3943	*N11	C4047	*G11	C4151	*J11	C4255	*L11
C238	C10	C443	R11	C730	*D3	C1157	*G3	C1923	*D12	C2025	*D12	C2135	L12	C2833	R8	C3112	*F4	C3333	*D4	C3619	*G5	C3840	*E11	C3944	*N11	C4048	*G11	C4152	*J11	C4256	*L11
C239	C9	C446	C11	C731	*D3	C1158	*G3	C1924	*D12	C2026	*D12	C2136	L12	C2834	*N9	C3113	*F4	C3334	*C4	C3620	F3	C3841	*E11	C3945	*N11	C4049	*G11	C4153	*J11	C4257	*L11
C240	C4	C447	C11	C732	*D3	C1159	*N1	C1925	E12	C2027	*D12	C2137	L12	C2835	*N9	C3114	*F4	C3335	*C4	C3621	*G5	C3842	*E10	C3946	*P10	C4050	*G11	C4154	*J11	C4258	*L11
C241	C8	C448	*R11	C733	*E3	C1160	*N1	C1926	E12	C2028	*D12	C2138	L12	C2836	*N9	C3115	*F4	C3401	*K5	C3622	*G5	C3843	*E10	C3947	*N10	C4051	*G11	C4155	*J11	C4259	*L11
C242	C6	C449	*P11	C734	*D3	C1161	*N1	C1927	*E12	C2029	*D12	C2139	L12	C2837	*N9	C3116	*F4	C3402	*J5	C3623	*G5	C3844	*E10	C3948	*N11	C4052	*G11	C4156	*J11	C4260	*L11
C243	C11	C501	B13	C901	R3	C1162	*N1	C1928	*E12	C2030	*D12	C2140	L12	C2838	*P10	C3117	*F4	C3403	*J5	C3624	*G5	C3845	*E10	C3949	*N11	C4053	*G11	C4157	*J11	C4261	*L11
C244	C10	C502	B13	C902	L2	C1163	*N2	C1929	E12	C2031	*E12	C2141	L12	C2839	*N9	C3118	*F4	C3404	*K5	C3625	*G5	C3846	*E11	C3950	*N11	C4054	*G11	C4158	*J11	C4262	*K11
C245	C4	C503	B12	C903	K2	C1164	*N2	C1930	E12	C2032	*E12	C2142	L12	C2840	*P7	C3119	*F5	C3405	*K5	C3626	*G5	C3847	*E11	C3951	*N11	C4055	*G11	C4159	*J11	C4263	*L11
C246	C9	C504	B13	C904	L1	C1165	*N2	C1931	*E12	C2033	*E12	C2143	L12	C2841	*N7	C3120	*F5	C3406	*K5	C3627	*G5	C3848	*E11	C3952	*N11	C4056	*G11	C4160	*J11	C4264	*L11
C247	C6	C505	K1	C905	*L1	C1166	*N2	C1932	*E12	C2034	*D12	C2144	L12	C2842	*N10	C3121	*F5	C3407	*K5	C3628	*G5	C3849	*E11	C3953	*N11	C4057	*G11	C4161	*J11	C4265	*L11
C248	A5	C506	C8	C906	*K1	C1201	E3	C1933	F12	C2035	*E12	C2145	L12	C2901	*P7	C3122	*F4	C3408	*J5	C3629	*G5	C3850	*E10	C3954	*P11	C4058	*G11	C4162	*H11	C4266	*L11
C249	A2	C507	C8	C907	*L3	C1202	N2	C1934	F12	C2036	*E12	C2146	L12	C2902	*P7	C3123	*F4	C3409	*K5	C3630	*G5	C3851	*E10	C3955	*N11	C4059	*G11	C4163	*J11	C4267	*L11
C250	A7	C508	C8	C908	M1	C1203	E3	C1935	F12	C2037	*F12	C2147	L12	C2903	*P7	C3124	*F4	C3410	*K5	C3631	*G5	C3852	*E11	C3956	*N11	C4060	*G11	C4164	*J11	C4268	*L11
C251	A3	C509	D8	C909	M1	C1204	N2	C1936	F12	C2038	*F12	C2148	L12	C2904	*P7	C3125	*F4	C3411	*J5	C3632	*G5	C3853	*E11	C3957	*N11	C4061	*G11	C4165	*J11	C4269	K11
C252	A5	C510	C8	C1001	L2	C1205	F3	C1937	E12	C2039	*F12	C2701	*E11	C2905	*P7	C3126	*F4	C3412	*K5	C3633	F3	C3854	*E10	C3958	*N11	C4062	*G10	C4166	*J11	C4270	*L11
C253	A2	C511	B12	C1002	L3	C1206	F3	C1938	E12	C2040	*D12	C2702	*E11	C2906	*P7	C3127	*F4	C3413	*K5	C3634	*G5	C3855	*E10	C3959	*N11	C4063	*G11	C4167	*J11	C4271	*L11
C254	A7	C512	D9	C1003	L3	C1207	F3	C1939	E12	C2041	*D12	C2703	*E11	C2907	*N7	C3128	*F4	C3414	*K5	C3635	*G5	C3856	*E10	C3960	*P11	C4064	*G11	C4168	*J11	C4272	*L11
C255	A3	C513	C8	C1004	L3	C1208	G3	C1940	E12	C2042	*E12	C2704	*E11	C2908	*P7	C3129	*F4	C3415	*J5	C3636	*G5	C3857	*E10	C3961	*N11	C4065	*G11	C4169	H11	C4273	*L11
C256	A5	C514	C8	C1005	J2	C1209	G3	C1941	E12	C2043	*E12	C2705	*E11	C2909	*P7	C3130	*F4	C3416	*J5	C3637	*G5	C3858	*E10	C3962	*N11	C4066	*G11	C4170	*J11	C4274	*L11
C257	A2	C515	*D8	C1006	J2	C1210	G3	C1942	E12	C2044	*E12	C2706	*E11	C2910	*P7	C3131	*F4	C3417	*J5	C3638	*G5	C3859	*E10	C3963	*P11	C4067	*G11	C4171	*J11	C4275	*L11
C258	A7	C516	*D8	C1007	J2	C1301	*D11	C1943	E12	C2045	*P12	C2707	*E11	C2911	*P7	C3132	*F5	C3418	J4	C3639	*G5	C3860	*D11	C3964	*N10	C4068	*G11	C4172	*J11	C4276	*K11
C259	A3	C517	*D9	C1008	J2	C1302	*E8	C1944	E12	C2046	*P12	C2708	*E11	C2912	*P7	C3133	*F5	C3419	*K5	C3640	*G5	C3861	F10	C3965	*P10	C4069	F10	C4173	*J11	C4277	*L11
C260	A5	C518	C9	C1009	*L2	C1303	*N11	C1945	D12	C2047	*P12	C2709	*P11	C2913	*P7	C3134	*F5	C3420	J3	C3641	*G4	C3862	*D10	C3966	*P10	C4070	*G11	C4174	*J11	C4278	*L11
C261	B2	C519	*C9	C1010	*L2	C1304	*L8	C1946	D12	C2048	*P12	C2710	*P11	C2914	*P7	C3135	*F4	C3421	*J5	C3642	*G5	C3863	*E10	C3967	*N10	C4071	*G11	C4175	*J11	C4279	*L11
C262	A7	C520	*C9	C1011	*L3	C1305	*F11	C1947	D12	C2049	*P12	C2711	*P11	C2915	*P7	C3201	*C5	C3422	*J5	C3701	*G4	C3864	*E10	C3968	*N10	C4072	*G11	C4176	*H11	C4280	*L11
C263	A3	C521	*C9	C1012	*L3	C1306	*G8	C1948	D12	C2050	*P12	C2712	*P11	C2916	*P7	C3202	*C5	C3423	*K5	C3702	*G5	C3865	*E10	C3969	P11	C4073	*G11	C4177	*J11	C4281	*L11
C264	B5	C522	*C8	C1013	J2	C1307	*J11	C1949	P12	C2051	*P12	C2713	*N11	C2917	*P7	C3203	*C5	C3424	*K5	C3703	*G5	C3866	*E10	C3970	*N11	C4074	*G11	C4178	*J11	C4282	*L11
C265	B2	C523	*C8	C1014	H1	C1308	P8	C1950	P12	C2052	*P12	C2714	*N11	C2918	*N7	C3204	*C5	C3425	*K5	C3704	*G5	C3867	*E10	C3971	*N11	C4075	*G11	C4179	*J11	C4283	*L11
C266	B7	C524	*C8	C1015	J1	C1309	*L11	C1951	*P12	C2053	*P12	C2715	*N11	C2919	*N7	C3205	*C5	C3426	*K5	C3705	*G5	C3868	*E10	C3972	*N11	C4076	*G10	C4180	*J11	C4284	*L11
C267	B3	C525	L4	C1016	J2	C1310	*E5	C1952	*P12	C2054	*P12	C2716	*N11	C2920	*N7	C3206	*D5	C3427	*J5	C3706	*G5	C3869	D11	C3973	*N11	C4077	*F11	C4181	*J11	C4285	*L11
C268	B5	C526	L4	C1017	*K3	C1311	*J5	C1953	P12	C2055	*P12	C2717	*G12	C2921	*N7	C3207	*C5	C3428	*K5	C3707	*G5	C3870	*E11	C3974	*N10	C4078	*F11	C4182	*J11	C4286	*M11
C269	B2	C527	*C8	C1018	*K3	C1401	G2	C1954	P12	C2056	*P12	C2718	*G12	C2922	*N7	C3208	*D5	C3429	*J5	C3708	*G4	C3871	*E11	C3975	*N10	C4079	*F11	C4183	*J11	C4287	*L11
C270	B7	C528	*C8	C1019	*K2	C1402	H2	C1955	*P12	C2057	*P12	C2719	*G12	C2923	*N7	C3209	*C5	C3430	*K5	C3709	*G4	C3872	*E11	C3976	*M11	C4080	*F11	C4184	*J11	C4288	*L12
C271	B3	C529	*D8	C1020	*K2	C1403	*H3	C1956	*N12	C2058	*P12	C2720	*G12	C2924	*N7	C3210	*C5	C3431	*K5	C3710	*G4	C3873	*E10	C3977	*P11	C4081	*F11	C4185	*J11	C4289	*M11
C272	C4	C530	*D8	C1021	J2	C1404	*H3	C1957	P12	C2059	*P12	C2721	*G12	C2925	*N7	C3211	*C5	C3432	*K5	C3711	*G4	C3874	*E10	C3978	*P11	C4082	*F11	C4186	*J11	C4290	*M11
C273	C1	C531	C8	C1022	J1	C1405	*H2	C1958	P12	C2060	*P12	C2722	*G12	C2926	*N7	C3212	*C5	C3433	J3	C3712	*G4	C3875	*E10	C3979	*P11	C4083	*F11	C4187	*J11	C4291	*L11
C274	C6	C532	L5	C1023	H1	C1406	*H3	C1959	*P12	C2061	*P12	C2723	*K12	C2927	*N7	C3213	*C5	C3434	*K5	C3713	*G4	C3876	*D10	C3980	*P11	C4084	*G11	C4188	*J11	C4292	*L11
C275	C2	C533	C8	C1024	J2	C1407	*H3	C1960	*P12	C2062	*N12	C2724	*J12	C2928	*N7	C3214	*D5	C3435	*J5	C3714	*G4	C3877	*D10	C3981	*N11	C4085	*G11	C4189	*J11	C4293	*L12
C276	C5	C534	C8	C1025	*K3	C1408	*H2	C1961	P12	C2063	*N12	C2725	*J12	C2929	*N7	C3215	*D5	C3436	*J5	C3715	*G4	C3878	*E11	C3982	*N11	C4086	*G11	C4190	*J11	C4294	*L11
C277	C2	C535	C8	C1026	*K3	C1409	*H2	C1962	P12	C2064	*N12	C2726	*J12	C2930	*N7	C3216	*D5	C3437	*J5	C3716	*G4	C3879	*E11	C3983	*N11	C4087	*G11	C4191	*J12	C4301	*D9
C278	C7	C536	D3	C1027	*K2	C1410	*H3	C1963	*P12	C2065	*N12	C2727	*J12	C2931	*N7	C3217	*C5	C3438	*K4	C3717	*G4	C3880	*D11	C3984	*N11	C4088	*G11	C4192	*J11	C4302	*E9
C279	C3	C537	C9	C1028	*K2	C1411	*H2	C1964	*P12	C2066	*N12	C2728	*J12	C2932	*N7	C3218	C3	C3439	*K4	C3718	*G4	C3881	*D10	C3985	*P11	C4089	*G11	C4193	*J11	C4303	*E9
C280	C5	C538	C9	C1029	J2	C1412	*H2	C1965	N12	C2067	*N12	C2729	*J12	C2933	*N7	C3219	*C5	C3440	*K5	C3719	*G4	C3882	*E10	C3986	*N11	C4090	*G11	C4194	*J11	C4304	*E9
C281	C2	C539	D9	C1030	J1	C1413	*H2	C1966	N12	C2068	*N12	C2730	*J12	C2934	*N7	C3220	C3	C3441	*K5	C3720	*G4	C3883	*E11	C3987	*P10	C4091	*G12	C4201	*L12	C4305	*E8
C282	C7	C540	D9	C1031	H1	C1414	*H2	C1967	*N12	C2069	*N12	C2731	*J12	C2935	*N7	C3221	*C5	C3442	*K5	C3721	*G4	C3884	*D11	C3988	*P10	C4092	*G11	C4202	*L12	C4306	*E8
C283	C3	C541	D8	C1032	J2	C1415	*H2	C1968	*N12	C2070	*N12	C2732	*J12	C3001	*F5	C3222	*C5	C3501	*K4	C3722	*G4	C3885	*D11	C3989	*P11	C4093	*G11	C4203	*L12	C4307	*E8
C284	A12	C542	C8	C1033	K2	C1416	*H3	C1969	M12	C2071	*N12	C2733	*J12	C3002	*F5	C3223	*C5	C3502	*J4	C3723	*G4	C3886	*E10	C3990	*N11	C4094	*F11	C4204	*L12	C4308	*E9
C285	A12	C543	C9	C1034	K2	C1417	*H2	C1970	M12	C2072	*N12	C2734	*J12	C3003	*F5	C3224	*C5	C3503	*J4	C3724	*G4	C3887	*E11	C3991	*N10	C4101	*J12	C4205	*L12	C4309	*E9
C286	A12	C544	C9	C1035	K3	C1418	*H2	C1971	*M12	C2073	*N12	C2735	*J12	C3004	*F5	C3225	*C5	C3504	*K4	C3725	*G4	C3888	*E11	C3992	*N10	C4102	*J12	C4206	*L12	C4310	*E9
C287	A12	C545	D9	C1036	K3	C1419	*H2	C1972	*M12	C2074	*N12	C2736	*J12	C3005	*F5	C3226	*C5	C3505	*K4	C3726	*G4	C3889	*D11	C3993	*N11	C4103	*J12	C4207	*M12	C4311	*F9
C288	B12	C546	D9	C1037	K3	C1420	*H2	C1973	N12	C2075	*N12	C2737	*H12	C3006	*F5	C3227	*D5	C3506	*K4	C3727	*G4	C3890	*D10	C3994	*N11	C4104	*J12	C4208	*L12	C4312	*E9
C289	B12	C547	C8	C1038	R3	C1421	*H3	C1974	N12	C2076	*N12	C2738	*J12	C3007	*F5	C3228	*C5	C3507	*K4	C3728	*G4	C3891	*E11	C4001	*G12	C4105	*J12	C4209	*L12	C4313	*E9
C290	C11	C548	D8	C1039	*R2	C1422	*H3	C1975	*N12	C2077	*N12	C2739	*G12	C3008	*F5	C3229	*C5	C3508	*J4	C3729	*G4	C3892	*E11	C4002	*G12	C4106	*J12	C4210	*L12	C4314	*E9
C291	C11	C549	E3	C1040	M4	C1423	*H3	C1976	*N12	C2078	*N12	C2740	*G12	C3009	*F5	C3230	*C5	C3509	*K4	C3730	*G4	C3893	*D11	C4003	*G12	C4107	*J12	C4211	*L12	C4315	*E9
C292	C11	C601	*D10	C1041	*M4	C1424	*H2	C1977	N12	C2079	*P12	C2741	*G12	C3010	*F5	C3231	*C5	C3510	*J4	C3731	*G4	C3894	*D10	C4004	*F12	C4108	*J12	C4212	*M12	C4316	*E8
C293	A8	C602	*N11	C1042	*M4	C1425	*H3	C1978	N12	C2080	*P12	C2742	*G12	C3011	*F5	C3232	*C5	C3511	*K4	C3732	*G4	C3901	*N11	C4005	*G12	C4109	*J11	C4213	*L12	C4317	*E8
C294	A8	C603	*J11	C1043	*M4	C1426	*H2	C1979	*N12	C2081	*P12	C2743	*G12	C3012	*F5	C3233	C3	C3512	*K4	C3733	*G4	C3902	*N11	C4006	*G12	C4110	*J12	C4214	*L12	C4318	*E9
C295	A8	C604	*L11	C1044	*M4	C1427	*H2	C1980	*N12	C2082	*P12	C2744	*G12	C3013	*F5	C3234	*D5	C3513	*K4	C3734	*G4	C3903	*P11	C4007	*G12	C4111	*J12	C4215	*L12	C4319	*E8
C296	A8	C605	*F11	C1045	N5	C1601	G3	C1981	P12	C2083	*P12	C2745	*M12	C3014	*F5	C3235	*D5	C3514	*K4	C3735	*G4	C3904	*N11	C4008	*G12	C4112	*J12	C4216	*L12	C4320	*E8
C297	B8	C606	*E11	C1046	N5	C1602	G3	C1982	P12	C2084	*N12	C2746	*L12	C3015	*F5	C3236	*D5	C3515	*J4	C3801	*E11	C3905	*P11	C4009	*G11	C4113	*J12	C4217	*L12	C4321	*E8

C4322 *E8
C4323 *E8
C4324 *E9
C4325 *E8
C4326 *E8
C4327 *E8
C4328 *E8
C4329 *E8
C4330 *E9
C4331 *E8
C4332 *E8
C4333 *E8
C4334 *E8
C4335 *E8
C4336 *E8
C4337 *E8
C4338 *E8
C4339 *E8
C4340 *E8
C4341 *E8
C4342 *E8
C4343 *E8
C4344 *E8
C4345 *D8
C4346 *E9
C4347 *E8
C4348 *F9
C4349 *E8
C4350 *E8
C4351 *E8
C4352 *E8
C4353 *E9
C4354 *F8
C4355 *E8
C4356 *E9
C4357 *D8
C4358 *E8
C4359 *E9
C4360 *E9
C4361 *E8
C4362 *D8
C4363 *E8
C4364 *E8
C4365 *E8
C4366 *E8
C4367 *E9
C4368 *E8
C4369 *F9
C4370 *E9
C4371 *E8
C4372 *E8
C4373 *E9
C4374 *D9
C4375 *E8
C4376 *E9
C4377 *F9
C4378 *E8
C4379 *E8
C4380 *E8
C4381 *E8
C4382 *E9
C4383 *E9
C4384 *E9
C4385 *E8
C4386 *E9
C4387 *E8
C4388 *E9
C4389 *E8
C4390 *E8
C4391 *F8
C4392 *E8
C4393 *E8
C4394 *F8
C4395 *E9
C4396 *F8
C4397 *E9
C4398 *E8
C4399 *E8
C4400 *E8
C4401 *E8
C4402 *E8
C4403 *D9
C4404 *E9
C4405 *E8
C4406 *E8
C4407 *E8
C4408 *E9
C4409 *E8
C4410 *E8
C4411 *E8
C4412 *E9
C4413 *E8
C4414 *F8
C4415 *F9
C4416 *E8
C4417 *F8
C4418 *E8
C4419 *E9

C4420 *E9
C4421 *E9
C4422 *E9
C4423 *E8
C4424 *F9
C4425 *E9
C4426 *E8
C4427 *E9
C4428 *E8
C4429 *F9
C4430 *D8
C4431 *E9
C4432 *F8
C4433 *E9
C4434 *D8
C4435 *D8
C4436 *E8
C4437 *F8
C4438 *F9
C4439 *E9
C4440 *E9
C4441 *E9
C4442 *E8
C4443 *D9
C4444 *D8
C4445 *D9
C4446 *E8
C4447 *E9
C4448 *E8
C4449 *F8
C4450 *D8
C4451 *F8
C4452 *F8
C4453 *E9
C4454 *E9
C4455 *D8
C4456 *D9
C4457 *E8
C4458 *E7
C4459 *D9
C4460 *D8
C4461 *D8
C4462 *F8
C4463 *F8
C4464 *E9
C4465 *E9
C4466 *D8
C4467 *K9
C4468 *E8
C4469 *E7
C4470 *D9
C4471 *D8
C4472 *D8
C4473 *F8
C4474 *F8
C4475 *E9
C4476 *E9
C4477 *E8
C4478 *E8
C4479 *E8
C4480 *E8
C4481 *E8
C4482 *E8
C4483 *E8
C4484 *E8
C4485 *E8
C4486 *E9
C4487 *E9
C4488 *E8
C4489 *E8
C4490 *E8
C4491 *E8
C4492 *E8
C4493 *E8
C4494 *E9
C4501 *L9
C4502 *L9
C4503 *L8
C4504 *K9
C4505 *L9
C4506 *K9
C4507 *L9
C4508 *L8
C4509 *L8
C4510 *L9
C4511 *L9
C4512 *L8
C4513 *L8
C4514 *L9
C4515 *L9
C4516 *L9
C4517 *L8
C4518 *L8
C4519 *L8
C4520 *L9
C4521 *L9
C4522 *L8
C4523 *K8

C4524 *L8
C4525 *L9
C4526 *L9
C4527 *L8
C4528 *L8
C4529 *L9
C4530 *L8
C4531 *L8
C4532 *L9
C4533 *L8
C4534 *L9
C4535 *L9
C4536 *K8
C4537 *L8
C4538 *L8
C4539 *L9
C4540 *L9
C4541 *L9
C4542 *L9
C4543 *L8
C4544 *L8
C4545 *L8
C4546 *L8
C4547 *L9
C4548 *L9
C4549 *L9
C4550 *L8
C4551 *L9
C4552 *L9
C4553 *L9
C4554 *L9
C4555 *L9
C4556 *L9
C4557 *L8
C4558 *L8
C4559 *L8
C4560 *L9
C4561 *L9
C4562 *K9
C4563 *L9
C4564 *L9
C4565 *L8
C4566 *M9
C4567 *L8
C4568 *L8
C4569 *L8
C4570 *L9
C4571 *L8
C4572 *L9
C4573 *L8
C4574 *L9
C4575 *L8
C4576 *L9
C4577 *L9
C4578 *L9
C4579 *L9
C4580 *L8
C4581 *L8
C4582 *L9
C4583 *L8
C4584 *L9
C4585 *L8
C4586 *L9
C4587 *L9
C4588 *L9
C4589 *L8
C4590 *K9
C4591 *L8
C4592 *L9
C4593 *L9
C4594 *L9
C4595 *L9
C4596 *L8
C4597 *L9
C4598 *L9
C4599 *L8
C4600 *L9
C4601 *L8
C4602 *L8
C4603 *M7
C4604 *M9
C4605 *L8
C4606 *L9
C4607 *L8
C4608 *L9
C4609 *L9
C4610 *K8
C4611 *L9
C4612 *L8
C4613 *L8
C4614 *M9
C4615 *L7
C4616 *L9
C4617 *M8
C4618 *L9
C4619 *L9
C4620 *L8
C4621 *M9

C4622 *L9
C4623 *L8
C4624 *M9
C4625 *L8
C4626 *L9
C4627 *M8
C4628 *L9
C4629 *L8
C4630 *K8
C4631 *M9
C4632 *L8
C4633 *L8
C4634 *L9
C4635 *K9
C4636 *L8
C4637 *M8
C4638 *M7
C4639 *L9
C4640 *K8
C4641 *M8
C4642 *K9
C4643 *L9
C4644 *L8
C4645 *L9
C4646 *L8
C4647 *K9
C4648 *L8
C4649 *K9
C4650 *K9
C4651 *M8
C4652 *M9
C4653 *L9
C4654 *L9
C4655 *K8
C4656 *K9
C4657 *L8
C4658 *L8
C4659 *M9
C4660 *M9
C4661 K9
C4662 *M8
C4663 *L9
C4664 *L9
C4665 *L9
C4666 *K8
C4667 *K9
C4668 *L8
C4669 *L8
C4670 *M9
C4671 *M9
C4672 K9
C4673 *M8
C4674 *L9
C4675 *L9
C4676 *L9
C4677 *K8
C4678 *K9
C4679 *L8
C4680 *L8
C4681 *M9
C4682 *L9
C4683 *L9
C4684 *L8
C4685 *L9
C4686 *L9
C4687 *L9
C4688 *K9
C4689 *L9
C4690 *L8
C4691 *L8
C4692 *L9
C4693 *L9
C4694 *L8
C4695 *L9
C4696 *L8
C4697 *L9
C4698 *L9
C4699 *H9
C4700 *G9
C4701 *G9
C4702 *H9
C4703 *H8
C4704 *H9
C4705 *H9
C4706 *H9
C4707 *H9
C4708 *J9
C4709 *H9
C4710 *H9
C4711 *J9
C4712 *H9
C4713 *J8
C4714 *H9
C4715 *H8
C4716 *H8
C4717 *G9
C4718 *H8
C4719 *H9
C4720 *G9
C4721 *H9
C4722 *H9
C4723 *J9
C4724 *H9
C4725 *H9

C4726 *J9
C4727 *H9
C4728 *H9
C4729 *J9
C4730 *G9
C4731 *H9
C4732 *G9
C4733 *H9
C4734 *J9
C4735 *H9
C4736 *J9
C4737 *G9
C4738 *H9
C4739 *J9
C4740 *H9
C4741 *H9
C4742 *H9
C4743 *H9
C4744 *H8
C4745 *H9
C4746 *H9
C4747 *J8
C4748 *H9
C4749 *H9
C4750 *H8
C4751 *H9
C4752 *H9
C4753 *H9
C4754 K8
C4755 *H9
C4756 *H8
C4757 *H8
C4758 *H9
C4759 *H8
C4760 *H9
C4761 *H9
C4762 *G9
C4763 *H9
C4764 *H8
C4765 *H9
C4766 *H9
C4767 *H8
C4768 *H9
C4769 *H9
C4770 *H8
C4771 *H9
C4772 *H8
C4773 *H8
C4774 *H8
C4775 *H8
C4776 *H9
C4777 *H8
C4779 *H9
C4780 *H8
C4782 *H9
C4784 *H9
C4785 *H9
C4786 *H8
C4787 *H9
C4788 *H9
C4789 *H9
C4791 *H8
C4793 *H8
C4795 *H9
C4796 *H9
C4797 *J8
C4798 *H9
C4799 *J8
C4800 *H9
C4802 *H9
C4803 *H9
C4804 *J8
C4805 *H9
C4806 *J8
C4807 *H9
C4808 *J8
C4809 *H9
C4810 *J9
C4811 *J8
C4812 *H8
C4813 *J8
C4814 *J9
C4815 *J8
C4816 *J8
C4817 *J8
C4818 *J8
C4820 *J8
C4822 *J9
C4824 *K8
C4825 *J9
C4828 *H8
C4830 *J9
C4832 G8
C4833 *H8
C4836 *J9
C4838 *J9
C4840 *J9
C4841 G8
C4842 *J9
C4843 *J9
C4844 *H9

C4845 *H9
C4846 *J9
C4847 *H9
C4848 *J9
C4849 *H8
C4850 *H9
C4851 *J9
C4852 *J9
C4853 *J9
C4854 *H9
C4855 *J9
C4856 *J9
C4857 *J9
C4858 *H8
C4859 *H9
C4860 *J9
C4861 *J9
C4862 *J9
C4863 *J9
C4864 *J9
C4865 *J9
C4866 *J9
C4867 *H9
C4868 *H8
C4871 *H8
C4873 *J9
C4876 *J9
C4878 *J9
C4879 *J9
C4880 *J9
C4881 *H8
C4882 *H9
C4883 *H8
C4884 *H8
C4885 *H8
C4886 *G8
C4887 *H8
C4888 *H8
C4889 *J8
C4890 *H8
C4891 *H8
C4892 *H9
C4893 *J9
C4894 *J9
C4895 *J9
C4896 *H9
C4897 *J9
C4898 *H9
C4899 *H9
C4901 *H9
C4902 *H9
C4903 *H9
C4904 *H9
C4906 G8
C4907 G8
C4908 *G9
C4909 *G9
C4910 *G8
C4911 *H8
C4912 *H8
C4913 *J8
C4914 J9
C4915 *J8
C4916 *G9
C4917 *H10
C4918 *H10
C4919 *J9
C4920 *J9
C4922 *J9
C4923 J8
C4924 *G9
C4925 *G9
C4926 *G8
C4927 *H8
C4928 *H8
C4929 *J8
C4930 J9
C4931 *J8
C4932 *G9
C4933 *H10
C4934 *H10
C4935 *J9
C4936 *J9
C4937 *J9
C4938 *J9
C4939 *H9
C4940 *G9
C4941 *H8
C4942 *H8
C4943 *H8
C4944 *J8
C4945 J9
C4946 *J8
C4947 *H9
C4948 *H10
C4949 *H10
C4950 *J9

C4951 *J9
C4952 *J9
C4953 *J9
C4954 *G9
C4955 *G9
C4956 *H8
C4957 *H8
C4958 *H8
C4959 *J8
C4960 *J9
C4961 *J8
C4962 *H9
C4963 *H9
C4964 *H9
C4965 *J9
C4966 *J9
C4967 *J9
C4968 *J9
C4969 *H10
C4970 *G8
C5001 *N8
C5002 *P8
C5003 *N8
C5004 *N8
C5005 *N8
C5006 *N8
C5007 *N8
C5008 *N8
C5009 *N8
C5010 *P8
C5011 *N8
C5012 *N8
C5013 *N8
C5014 *N8
C5015 *N8
C5016 *N8
C5017 *N8
C5018 *N8
C5019 *N8
C5020 *N9
C5021 *N8
C5022 *N8
C5023 *N8
C5024 *N8
C5025 *N9
C5026 *P8
C5027 *N8
C5028 *N9
C5029 *P8
C5030 *N9
C5031 *N8
C5032 *P8
C5033 *N9
C5034 *P8
C5035 *P8
C5036 *N9
C5037 *P8
C5038 *N8
C5039 *N9
C5040 *P8
C5041 *N8
C5042 *P8
C5043 *N8
C5044 *N8
C5045 *N8
C5046 *N8
C5047 *P8
C5048 *N8
C5049 *P8
C5050 *N8
C5051 *P8
C5052 *P8
C5053 *N8
C5054 *N9
C5055 *N8
C5056 *P8
C5057 *N9
C5058 *N8
C5059 *N9
C5060 *N8
C5061 *P8
C5062 *N9
C5063 *N8
C5064 *P8
C5065 *N8
C5066 *N8
C5067 *N9
C5068 *P8
C5069 *N9
C5070 *N8
C5071 *N8
C5072 *P8
C5073 *N8
C5074 *N9
C5075 *P8
C5076 *N8
C5077 *N9
C5078 *P8

C5079 *P9
C5080 *P8
C5081 *N8
C5082 *P9
C5083 *P8
C5084 *P9
C5085 *N8
C5086 *P9
C5087 *P8
C5088 *P9
C5089 *N9
C5090 *P9
C5091 *P9
C5092 *N8
C5093 *N8
C5094 *P9
C5095 *N9
C5096 *N9
C5097 *N8
C5098 *N9
C5099 *N8
C5100 *N8
C5101 *P8
C5102 *P8
C5103 *M7
C5104 *P9
C5105 *N8
C5106 *P9
C5107 N7
C5108 *P9
C5109 *R9
C5110 *P9
C5111 *R9
C5112 N7
C5113 *P8
C5114 *P8
C5115 *M7
C5116 *P8
C5117 *P8
C5118 *P8
C5119 *P8
C5120 *P8
C5121 *P8
C5122 *P8
C5123 *P8
C5124 *P7
C5125 *P8
C5126 *P8
C5127 *P8
C5128 *P8
C5129 *P8
C5130 *P8
C5131 *P8
C5132 *P8
C5133 *N8
C5134 *P8
C5135 R9
C5136 *N8
C5137 *P8
C5138 *M7
C5139 *P8
C5140 *N8
C5141 *N8
C5142 *N8
C5143 *N8
C5144 *N8
C5145 *N8
C5146 *N8
C5147 *P8
C5148 *N8
C5149 R9
C5150 R9
C5151 *N8
C5152 *P8
C5153 *P8
C5154 *P8
C5155 *N9
C5156 *P9
C5157 *N8
C5158 *N8
C5159 *P9
C5160 *N9
C5161 *P9
C5162 *N8
C5163 *P8
C5164 *P8
C5165 *P8
C5166 *N9
C5167 *P9
C5168 *N8
C5169 *N8
C5171 *N9
C5172 *P9
C5173 *N8
C5174 *P8
C5175 *P8
C5176 *P8

C5177 *N9
C5178 *P9
C5179 *N8
C5180 *N8
C5181 *P9
C5182 *N9
C5183 *P8
C5184 *N8
C5185 *P8
C5186 *P8
C5187 *P8
C5188 *N9
C5189 *N9
C5190 *N8
C5191 *N8
C5192 *P9
C5193 *N9
C5194 *P8
C5195 *N9
C5196 *P9
C5197 *N8
C5198 *N8
C5199 *P7
C5201 *E5
C5202 *E5
C5203 *E5
C5204 *E5
C5205 *D5
C5206 *E5
C5207 *D5
C5208 *E5
C5209 *D5
C5210 *E5
C5211 *D4
C5212 *E4
C5213 *D4
C5214 *E4
C5215 *D4
C5216 *E4
C5217 *D4
C5218 *E4
C5219 *D4
C5220 *E4
C5221 *E4
C5222 *E4
C5223 *E4
C5224 *F4
C5225 *C6
C5226 *D5
C5227 *D5
C5228 *D5
C5229 *D5
C5230 *D5
C5231 *D5
C5232 *D5
C5233 *E5
C5234 *E5
C5235 *E5
C5236 *E5
C5237 *D5
C5238 *E5
C5239 *E5
C5240 *E5
C5241 *E5
C5242 *E5
C5243 *E5
C5244 *E5
C5245 *E5
C5246 *E5
C5247 *E5
C5248 *E5
C5249 *E5
C5250 *E5
C5251 *E5
C5252 *E5
C5253 *E5
C5254 *E5
C5255 *E5
C5256 *E5
C5257 *E5
C5258 *E5
C5259 *E5
C5260 *E5
C5261 *E5
C5262 *E5
C5263 *E5
C5264 *E5
C5265 *E5
C5266 *E5
C5267 *E5
C5268 *E5
C5269 *E5
C5270 *E5
C5271 *E5
C5272 *E5
C5273 *E5
C5274 *E5
C5275 *E5

C5276 *D6
C5277 *D6
C5278 F4
C5279 F3
C5280 *E4
C5281 *E6
C5282 *D5
C5283 *E5
C5284 *E5
C5285 *E5
C5286 *E4
C5287 *E5
C5288 *E5
C5289 *E5
C5290 *E5
C5291 *E5
C5292 *E4
C5293 *E4
C5294 *E4
C5295 *E4
C5296 *E4
C5297 *E4
C5298 *E4
C5299 *E4
C5300 *E4
C5301 *E4
C5302 *E4
C5303 *E4
C5304 *E4
C5305 *D4
C5306 *D4
C5307 *D4
C5308 *D4
C5309 *D4
C5310 *D4
C5311 *D5
C5312 *D4
C5313 *D4
C5314 *D5
C5315 *D5
C5316 *D5
C5317 *E4
C5318 *C6
C5319 *D5
C5320 *E5
C5321 *E5
C5322 *E5
C5323 *E5
C5324 *E5
C5325 *C6
C5326 *D5
C5327 *D5
C5328 *D5
C5329 *D5
C5330 *D5
C5331 *D5
C5332 *E5
C5333 *E5
C5334 *E5
C5335 *E5
C5336 *E5
C5337 *E5
C5338 *E5
C5339 *D5
C5340 *E5
C5401 *H5
C5402 *H5
C5403 *H5
C5404 *J5
C5405 *H5
C5406 *J4
C5407 *H5
C5408 *J5
C5409 *H4
C5410 *J5
C5411 *H4
C5412 *H4
C5413 *H4
C5414 *J5
C5415 *H4
C5416 *J4
C5417 *H4
C5418 *J4
C5419 *H4
C5420 *J4
C5421 *H5
C5422 *H4
C5423 *H4
C5424 *H6
C5425 *J6
C5426 *H5
C5427 *H5
C5428 *H5
C5429 *H5
C5430 *H5
C5431 *H5
C5432 *H5

C5434 *H5
C5435 *H5
C5436 *H5
C5437 *H5
C5438 *H5
C5439 *H5
C5440 *H5
C5441 *H5
C5442 *H5
C5443 *H5
C5444 *H5
C5445 *H5
C5446 *H5
C5447 *H5
C5448 *H5
C5449 *H5
C5450 *H5
C5451 *H5
C5452 *H5
C5453 *H5
C5454 *H5
C5455 *H5
C5456 *H5
C5457 *H5
C5458 *H5
C5459 *H5
C5460 *H5
C5461 *H5
C5462 *H5
C5463 *H5
C5464 *H5
C5465 *H5
C5466 *J5
C5467 *H5
C5468 *J5
C5469 *H5
C5470 *H5
C5471 *H5
C5472 *H5
C5473 *H5
C5474 *H5
C5475 *J5
C5476 H6
C5477 H6
C5478 J6
C5479 J6
C5480 *H4
C5481 *J6
C5482 *H5
C5483 *H5
C5484 *J5
C5485 *H5
C5486 *H4
C5487 *J5
C5488 *J5
C5489 *J5
C5490 *J5
C5491 *H5
C5492 *H5
C5493 *H5
C5494 *H4
C5495 *H4
C5496 *H4
C5497 *H4
C5498 *H4
C5499 *H4
C5500 *J4
C5501 *J4
C5502 *H4
C5503 *H4
C5504 *H4
C5505 *H4
C5506 *H4
C5507 *J4
C5508 *J4
C5509 *H4
C5510 *H4
C5511 *H4
C5512 *J4
C5513 *J4
C5514 *J5
C5515 *H4
C5516 *H5
C5517 *H4
C5518 *G6
C5519 *H5
C5520 *H5
C5521 *H5
C5522 *H5
C5523 *H5
C5524 *H5
C5525 *G6
C5526 *H5
C5527 *H5
C5528 *H5
C5529 *H5
C5530 *J5
C5531 *H5

C5532 *H5
C5533 *H5
C5534 *H5
C5535 *J5
C5536 *J5
C5537 *J5
C5538 *J5
C5539 *J5
C5540 *J5

CL700 D3
CL701 D3
CL702 D3
CL703 D2
CL704 D3
CL1001 *M4
CL1002 *N4
CL1400 H3
CL1401 H2
CL1402 H2
CL1403 H2
CL1404 H2
CL1405 H2
CL1406 H2
CL1407 H2
CL1901 E12
CL1902 E12
CL1903 D12
CL1904 D12
CL1905 P12
CL1906 P12
CL1907 M12
CL1908 M12
CL2001 E12
CL2002 D12
CL2003 P12
CL2004 M12
CL2801 R8
CL3001 E3
CL3201 C3
CL3401 J3
CL3601 F3
CL3801 *E10
CL3802 *E10
CL3803 F10
CL3804 E10
CL3805 *E10
CL3806 F10
CL3807 *E10
CL3808 *E10
CL3809 E10
CL3810 F10
CL3811 E10
CL3812 F10
CL3813 E10
CL3901 *P10
CL3902 *P10
CL3903 P10
CL3904 P10
CL3905 *P10
CL3906 P10
CL3907 *P10
CL3908 *P10
CL3909 P10
CL3910 P10
CL3911 P10
CL3912 P10
CL3913 P10
CL4001 *G11
CL4002 *G11
CL4003 H11
CL4004 G11
CL4005 *G11
CL4006 H11
CL4007 *G11
CL4008 *G11
CL4009 G11
CL4010 H11
CL4011 G11
CL4012 H11
CL4013 G11
CL4101 *K11
CL4102 *J11
CL4103 K11
CL4104 K11
CL4105 *K11
CL4106 K11
CL4107 *K11
CL4108 *K11
CL4109 K11
CL4110 K11
CL4111 K11
CL4112 K11
CL4113 K11
CL4201 *M11
CL4202 *M11
CL4203 M11
CL4204 M11

CL4205 *M11
CL4206 M11
CL4207 *M11
CL4208 *M11
CL4209 M11
CL4210 M11
CL4211 M11
CL4212 M11
CL4213 M11
CL4301 *D8
CL4302 *D8
CL4303 *D8
CL4304 *D8
CL4501 *K8
CL4502 *K8
CL4503 *K8
CL4504 *K8
CL4701 *G8
CL4702 *G8
CL4703 *G8
CL4704 *G8
CL5001 R8
CL5002 R8
CL5003 R8
CL5004 R8
CL5005 R8
CL5006 R8
CL5007 R8
CL5008 R8
CL5009 R8
CL5010 R8
CL5011 R8
CL5012 R9
CL5013 R8
CL5014 R9
CL5015 R9
CL5016 R9
CL5017 R9
CL5018 R9
CL5019 R9
CL5020 R9
CL5201 D6
CL5202 D6
CL5203 D6
CL5204 D6
CL5205 D6
CL5206 D6
CL5207 D6
CL5208 D6
CL5401 G6
CL5402 G6
CL5403 G6
CL5404 G6
CL5405 G6
CL5406 G6
CL5407 G6
CL5408 G6
CN801 P3
CN802 L3
CN901 K1
CN902 K1
CN1001 J1
CN1801 G1
CNB1 B13
CNC1 C13
CNE1 E13
CNG1 G13
CNJ1 J13
CNL1 L13
CNN1 N13

D501 D9
D701 E1
D702 N1
D703 N1
D704 N1
D705 N1
D706 N1
D707 N1
D708 N1
D709 N1
D710 N1
D711 N1
D712 N1
D713 N1
D714 N1
D715 N1
D716 N1
D717 N1
D718 C1
D719 B1
D720 F1
D721 B1
D1001 K1
D1002 K1
D1401 E1
D1402 G1
D1403 F1
D1404 F1
D1405 F1
D1406 F1
D1407 F1
D1408 F1
D1409 F1
D1410 E1
D1411 E1
D1412 E1
D1413 E1

DD201 B10
DD202 B9
DD203 B4
DD204 B8
DD205 B5
DD206 B4
DD207 B1
DD208 B6
DD209 B3
DD210 B11
DD211 B7

E1 F1
E2 A8
E3 A12
E4 A2
E5 K6
E6 K13
E7 P1
E8 R6
E9 P13
E10 C7
E21 *A2
E22 *A6
E23 *A11
E24 *H1
E25 *F7
E26 *H12
E27 *R1
E28 *R6
E29 *P12
E30 *M7

F201 B12
F202 A10
F203 A9
F204 A3
F205 A8
F206 A5
F207 A4
F208 A1
F209 A6
F210 A3
F211 A11
F212 A7

FB501 L4
FB901 K1
FB902 K2
FB903 K1
FB904 K2
FB2001 *F12
FB2002 *E12
FB2003 *F12
FB2004 *D12
FB2005 *P12
FB2006 *N12
FB2007 *P12
FB2008 *N12
FB2801 R8

FB3001 E4
FB3201 C3
FB3401 J4
FB3601 F4
FB3801 *E10
FB3901 *P11
FB4001 *G11
FB4101 *K11
FB4201 *M11
FB4301 *D9
FB4302 *D8
FB4303 *D8
FB4501 *M9
FB4502 *M9
FB4503 K9
FB4701 *J9
FB4702 *J9
FB4703 *J9
FB5001 *P9
FB5002 *N9
FB5003 *P9
FB5201 *E5
FB5202 *E6
FB5401 *H5
FB5402 *J6

IC1 D3
IC2 E11
IC3 N11
IC4 G11
IC5 J11
IC6 L11
IC7 E8
IC8 L9
IC9 H9
IC10 N8
IC11 E5
IC12 H5
IC21 H2
IC301 E1
IC302 E1
IC303 D1
IC304 D2
IC305 C2
IC306 D1
IC402 H12
IC403 R11
IC405 C12
IC406 R10
IC407 C12
IC408 R12
IC501 B12
IC502 B12
IC503 C8
IC504 L4
IC505 C9
IC506 D9
IC507 D8
IC701 C2
IC901 K1
IC902 M1
IC1001 R3
IC1002 *R2
IC1003 M4
IC1004 N4
IC1005 N4
IC1006 N4
IC1101 *F2
IC1102 *G2
IC1103 N3
IC1104 N4
IC1105 N3
IC1106 N4
IC1107 M3
IC1151 M2
IC1152 *G3
IC1153 N2
IC1154 N2
IC1201 E3
IC1202 M2
IC1203 F3
IC1204 F3
IC1205 G3
IC1601 G3
IC1701 H3
IC1702 J3
IC1703 H3
IC1704 K3
IC1705 J3
IC1801 G1
IC1802 H1
IC1803 H1
IC1901 F12
IC1902 D12
IC1903 P12
IC1904 N12
IC2801 P9
IC2802 N9

IC2803 R8
IC2901 P7
IC2902 N7
IC3001 F5
IC3002 F5
IC3003 E3
IC3101 F4
IC3102 F4
IC3201 C5
IC3202 C5
IC3203 C3
IC3301 C4
IC3302 C4
IC3401 K5
IC3402 K5
IC3403 J3
IC3501 K4
IC3502 K4
IC3601 G5
IC3602 G5
IC3603 F3
IC3701 G4
IC3702 G4
IC4301 *F9
IC4501 *M9
IC4701 G8
IC5001 *P8

L401 C11
L402 *R11
L501 C8
L3801 *F11
L3802 D11
L3803 F11
L3804 *D11
L3805 *F11
L3806 D11
L3807 F11
L3808 *D11
L3809 *F11
L3810 F11
L3811 D11
L3812 *F11
L3813 *N11
L3814 F11
L3815 *D11
L3816 *F11
L3817 D11
L3818 D10
L3901 *P11
L3902 M11
L3903 P11
L3904 *M11
L3905 *P11
L3906 N11
L3907 P11
L3908 *N11
L3909 *P11
L3910 P11
L3911 N11
L3912 *P11
L3913 *N11
L3914 P11
L3915 *M11
L3916 *P11
L3917 M11
L3918 P11
L4001 *H12
L4002 F12
L4003 H12
L4004 *F12
L4005 *H12
L4006 F12
L4007 H12
L4008 *F12
L4009 *H12
L4010 H11
L4011 *F12
L4012 *H11
L4013 F12
L4014 H12
L4015 *F12
L4016 *H12
L4017 F12
L4018 F10
L4101 *K12
L4102 H12
L4103 K12
L4104 *H12
L4105 *K12
L4106 H12
L4107 K12
L4108 *H12
L4109 *K12
L4110 K11
L4111 H12
L4112 *K11
L4113 *H12

L4114	K11	Q408	C1	R318	D1	R473	*D1	R628	*D5	R760	*D3	R906	P3	R1203	E2	R1453	*G3	R1551	F1	R1740	*N10	R2014	*F12	R3007	*F5	R3918	*P10	R5204	D4	RB1123	M3
L4115	*H12	Q409	D1	R319	*D1	R474	*D1	R629	*E5	R761	D4	R907	R3	R1204	E2	R1454	*G3	R1552	F1	R1741	*L11	R2015	*F12	R3008	*F5	R3919	*P10	R5205	*E4	RB1124	M3
L4116	*K11	Q410	*C1	R320	F1	R475	*D1	R630	N9	R762	D4	R908	R3	R1205	N2	R1455	*G3	R1553	F1	R1742	*L11	R2016	*F12	R3009	*F5	R4001	G11	R5206	*D4	RB1125	M3
L4117	H12	Q411	*C1	R321	F1	R501	B13	R631	N7	R763	*D3	R909	R3	R1206	M2	R1456	*G3	R1554	F1	R1743	*N11	R2017	D12	R3010	F5	R4002	G11	R5207	*E4	RB1151	*G3
L4118	H11	Q412	*C1	R322	E1	R502	D8	R632	*L12	R764	D4	R910	R3	R1207	M2	R1457	*G3	R1555	F1	R1744	*N10	R2018	*E12	R3011	F5	R4003	G11	R5208	*D5	RB1152	*G3
L4201	*M12	Q413	*D1	R323	E1	R503	D8	R633	*L11	R765	D4	R911	R3	R1208	M2	R1458	*G3	R1556	E1	R1745	*L11	R2019	*E12	R3101	*F4	R4004	G11	R5209	*E4	RB1153	*G3
L4202	K12	Q414	*D1	R324	D1	R504	D8	R634	*G11	R766	E3	R912	R3	R1209	E2	R1459	*G3	R1557	E1	R1746	*L11	R2020	*E12	R3102	*F5	R4005	G11	R5210	D5	RB1154	*G3
L4203	M12	Q415	*D1	R325	*E1	R505	*C8	R635	*G11	R767	D4	R913	P3	R1210	M2	R1460	*G3	R1558	E1	R1747	*N10	R2021	F12	R3103	*F4	R4006	*G12	R5211	D6	RB1155	M1
L4204	*K12	Q501	D9	R326	E1	R506	D9	R636	*L11	R768	E4	R914	M1	R1212	M3	R1461	J2	R1559	E1	R1748	*P10	R2022	F12	R3104	*F4	R4007	*G12	R5212	D6	RB1156	M1
L4205	*M12	Q1401	G1	R327	E1	R507	D9	R637	*F11	R769	D4	R915	M1	R1213	E3	R1462	J2	R1560	G1	R1749	*L11	R2023	E12	R3105	F4	R4008	*F11	R5213	D6	RB1157	M1
L4206	K12			R328	D1	R508	B13	R638	K11	R770	E4	R916	M1	R1214	N3	R1463	J2	R1561	H2	R1750	*L11	R2024	E12	R3106	F4	R4009	*G11	R5214	D6	RB1158	*G3
L4207	M12	R201	C12	R329	D1	R509	C8	R639	K11	R771	D4	R917	M1	R1215	F3	R1464	J2	R1562	H2	R1751	*E5	R2025	E12	R3201	*C5	R4010	*G11	R5215	*E5	RB1159	M1
L4208	*K12	R202	C12	R330	D1	R510	C8	R640	K11	R772	D4	R1001	L2	R1216	F2	R1465	J2	R1601	*E8	R1752	*E5	R2026	F12	R3202	*C5	R4011	*G11	R5216	D6	RB1160	*G3
L4209	*M12	R203	A12	R331	*D1	R511	C8	R641	K11	R773	D4	R1002	L2	R1217	F2	R1466	J2	R1602	*E9	R1753	*J5	R2027	D12	R3203	C3	R4012	*H11	R5217	*E4	RB1161	*G3
L4210	M11	R204	A12	R332	E1	R512	D8	R642	K11	R774	D4	R1003	L2	R1218	F2	R1467	*H3	R1603	*E9	R1754	*J5	R2028	D12	R3204	C3	R4013	*H11	R5218	D4	RB1162	*G3
L4211	K12	R205	A12	R333	E1	R513	D8	R643	K11	R775	D4	R1004	L3	R1219	F2	R1468	J2	R1604	*E9	R1755	*D6	R2029	*P12	R3205	C3	R4014	*H11	R5219	*E4	RB1163	M1
L4212	*M11	R206	B11	R334	D1	R514	D8	R644	F11	R776	*E3	R1005	L3	R1221	F3	R1469	*H3	R1605	*E9	R1756	D6	R2030	*N12	R3206	C3	R4015	*H11	R5220	*D4	RB1164	N1
L4213	*K12	R207	B10	R335	D1	R515	*C8	R645	F11	R777	*E3	R1006	L3	R1222	F3	R1470	H3	R1606	*E9	R1757	*H6	R2031	*P12	R3207	*C5	R4016	*G11	R5221	*E4	RB1165	N1
L4214	M11	R208	B4	R336	D1	R516	D9	R646	F11	R778	D2	R1007	L3	R1223	F2	R1471	*H3	R1607	*E9	R1758	H6	R2032	*P12	R3208	*C5	R4017	*G11	R5222	D6	RB1166	N1
L4215	*K12	R209	B9	R337	*D1	R517	D8	R647	F11	R779	D2	R1008	L3	R1224	F2	R1472	H3	R1608	G4	R1759	*D6	R2033	*N12	R3209	*C5	R4018	*G11	R5223	E4	RB1167	N1
L4216	*M11	R210	B6	R338	D1	R518	D9	R648	F11	R780	*E3	R1009	*J2	R1225	G2	R1473	*H3	R1609	G4	R1760	D6	R2034	*N12	R3210	C6	R4019	*G11	R5224	D5	RB1168	N1
L4217	K12	R211	*B10	R339	D1	R519	L4	R649	F11	R781	*E3	R1010	*J2	R1226	F2	R1474	H3	R1610	G4	R1761	*H6	R2035	*P12	R3211	C5	R4101	K11	R5401	*J5	RB1169	N1
L4218	K11	R212	*B10	R340	D1	R520	D9	R650	F11	R782	D2	R1011	*J2	R1228	F3	R1475	*H3	R1611	G4	R1762	H6	R2036	*N12	R3301	*C4	R4102	K11	R5402	*G5	RB1170	P1
L4301	*F8	R213	*B9	R341	D1	R521	C8	R651	F11	R783	D2	R1012	*J2	R1229	G3	R1476	H2	R1612	G4	R1763	*D6	R2037	*P12	R3302	*C4	R4103	K11	R5403	*H4	RB1701	H4
L4302	*F8	R214	*B9	R342	D1	R522	*C9	R652	F11	R784	D3	R1013	*J2	R1230	G2	R1477	*H3	R1613	H4	R1764	D6	R2038	*P12	R3303	*C4	R4104	K11	R5404	H4	RB1702	H4
L4303	*E9	R215	*B3	R343	D1	R523	D9	R653	F11	R785	D3	R1014	*J2	R1231	G2	R1478	*H3	R1614	H4	R1765	*H6	R2039	*N12	R3304	*C4	R4105	K11	R5405	*H4	RB1703	J4
L4304	*E9	R216	*B3	R344	*D1	R524	D9	R654	F11	R786	D3	R1015	*J2	R1232	G2	R1479	H2	R1615	H4	R1766	H6	R2040	*N12	R3305	C5	R4106	*J12	R5406	*H4	RB1704	J4
L4305	*D8	R217	*B8	R345	D1	R525	*C9	R655	F11	R787	D3	R1016	*J2	R1233	G2	R1480	*H3	R1616	*G4	R1767	F5	R2041	P12	R3306	C4	R4107	*J12	R5407	*H4	RB1705	H4
L4306	*D9	R218	*B8	R346	D1	R526	C8	R656	F11	R788	D2	R1017	K1	R1235	G3	R1481	*H3	R1617	*G4	R1768	E5	R2042	*P12	R3401	*K5	R4108	*J11	R5408	*H5	RB1706	H4
L4307	*E8	R219	*B5	R347	D2	R527	C8	R657	F11	R789	D2	R1018	K1	R1236	E2	R1482	G2	R1618	*G4	R1769	J5	R2043	*P12	R3402	*K5	R4109	*J11	R5409	*J4	RB1707	K3
L4308	*E7	R220	*B5	R349	D2	R528	C8	R658	F11	R790	D3	R1019	K3	R1237	F2	R1483	H2	R1619	*G4	R1770	J5	R2044	*P12	R3403	J4	R4110	*J11	R5410	G5	RB1708	K3
L4501	*M9	R221	*B10	R350	D2	R529	L5	R659	*D8	R791	D3	R1020	K3	R1238	F2	R1484	*H3	R1620	*H4	R1801	*G1	R2045	N12	R3404	J4	R4111	*J11	R5411	H6	RB1709	J3
L4502	*M9	R222	*B10	R351	*D2	R530	L5	R660	*L8	R792	D3	R1021	K2	R1239	G2	R1485	*H3	R1621	*H4	R1802	*G1	R2046	*N12	R3405	J3	R4112	*K11	R5412	H6	RB1710	J3
L4503	*L9	R223	*B9	R352	F1	R531	L5	R661	*G8	R793	D3	R1022	K2	R1240	M2	R1486	H2	R1622	*H4	R1803	*G1	R2047	*N12	R3406	J3	R4113	*K11	R5413	*H6		
L4504	*L9	R224	*B9	R353	F1	R532	L5	R662	*H5	R794	*D3	R1023	J1	R1301	*D11	R1487	*H3	R1623	*G4	R1804	*G1	R2048	*N12	R3407	*K5	R4114	*K11	R5414	*H6	S501	K1
L4505	*K8	R225	*B3	R354	C1	R533	L5	R663	*J5	R795	*D3	R1024	H1	R1302	*E8	R1488	E1	R1624	*L8	R1805	G1	R2049	P12	R3408	*K5	R4115	*K11	R5415	*J5	S901	L1
L4506	*K9	R226	*B3	R355	C1	R534	L5	R664	*D8	R796	*D3	R1025	R3	R1303	*L8	R1489	H2	R1625	*L8	R1806	*G1	R2050	P12	R3409	*K5	R4116	*K11	R5416	*G6	S902	M1
L4507	*L8	R227	*B8	R356	C1	R535	L5	R665	*K9	R797	*D3	R1026	R3	R1304	*N11	R1490	H2	R1626	*L9	R1807	*G1	R2051	N12	R3410	K5	R4117	*K11	R5417	*H4		
L4508	*L8	R228	*B8	R357	*C1	R536	L5	R666	J9	R798	D3	R1027	R3	R1305	*G8	R1491	H2	R1627	*L9	R1808	G1	R2052	N12	R3411	K5	R4118	*K11	R5418	H4	SORI01	A7
L4701	*G9	R229	*B5	R358	C1	R537	C8	R701	D3	R799	D3	R1028	R3	R1306	*F11	R1492	H3	R1628	*L9	R1809	G1	R2053	P12	R3501	*K4	R4119	*K11	R5419	*H4	SORI02	R7
L4702	*G9	R230	*B5	R359	C1	R538	D9	R702	D2	R800	*D3	R1029	R3	R1307	*J11	R1493	H2	R1629	*L9	R1810	H1	R2054	P12	R3502	*K5	R4201	M11	R5420	*H4		
L4703	*G8	R231	C11	R360	C2	R539	D9	R703	D2	R801	*D3	R1030	R3	R1308	P8	R1494	H3	R1630	*L9	R1811	G1	R2055	N12	R3503	*K4	R4202	M11	R5421	*H4	T1001	K3
L4704	*H8	R232	C10	R361	C2	R540	*D8	R704	D3	R802	D3	R1031	*R2	R1309	*L11	R1495	H3	R1631	*L9	R1812	G1	R2056	N12	R3504	*K4	R4203	M11	R5422	*H6		
L4705	*H8	R233	C4	R362	C2	R541	*C8	R705	D3	R803	*D3	R1032	*R2	R1310	*E5	R1496	H3	R1632	J9	R1813	G1	R2201	*E10	R3505	K4	R4204	M11	R5423	J4	TP201	C13
L4706	*J8	R234	C9	R363	*C2	R542	D3	R706	D3	R804	*D3	R1033	R3	R1311	*J5	R1497	H3	R1633	J9	R1814	G1	R2202	N10	R3506	K4	R4205	M11	R5424	G5	TP202	A12
L4707	J9	R235	C6	R364	E1	R543	D3	R707	D3	R805	D2	R1034	R3	R1312	*E11	R1498	*H3	R1634	*G8	R1815	G1	R2203	G11	R3601	*G5	R4206	*L12			TP203	C11
L4708	*J8	R236	B5	R365	E1	R544	D3	R708	D3	R806	*D2	R1035	*R2	R1401	H2	R1499	*H3	R1635	*G8	R1816	H1	R2204	J11	R3602	*G5	R4207	*L12	RB701	N1	TP204	C10
L4709	*G9	R237	B2	R366	D1	R545	D3	R709	D3	R807	D2	R1036	*R2	R1402	H3	R1500	H3	R1636	G8	R1817	H1	R2205	L11	R3603	F4	R4208	*L11	RB702	N1	TP205	C4
L4710	*H10	R238	B7	R367	D1	R546	E3	R710	D3	R808	*D3	R1037	R3	R1403	H2	R1501	H3	R1637	G8	R1818	H1	R2251	J8	R3604	F4	R4209	*L11	RB703	N1	TP206	C9
L4711	*H10	R239	B3	R368	D1	R547	C9	R711	D3	R809	D2	R1038	R3	R1404	H2	R1502	H3	R1638	*G8	R1819	H1	R2252	*E8	R3605	F3	R4210	*L11	RB704	N1	TP207	C6
L4712	*J9	R240	*B4	R369	*D1	R548	D9	R712	D3	R810	D3	R1039	*R2	R1405	H2	R1503	H3	R1639	*G8	R1820	H1	R2253	*L8	R3606	F3	R4211	*L11	RB901	K1	TP208	C5
L5001	*N8	R241	*B4	R370	E1	R549	D8	R713	D3	R811	D3	R1040	*R2	R1406	H2	R1504	H3	R1640	*N9	R1821	H1	R2301	F8	R3607	*G5	R4212	*M11	RB902	P2	TP209	C2
L5002	*P8	R242	*B1	R371	E1	R550	C9	R714	D3	R812	D3	R1041	M4	R1407	H2	R1505	H3	R1641	*N9	R1822	H1	R2401	J9	R3608	*G5	R4213	*M11	RB903	P2	TP210	C7
L5003	*P8	R243	*B1	R402	H12	R551	D9	R715	D3	R813	D3	R1042	M4	R1408	H2	R1506	H3	R1642	*P8	R1823	H1	R2501	F8	R3609	*G5	R4214	*M11	RB904	P2	TP211	B3
L5004	*P8	R244	*B6	R403	R11	R552	D8	R716	D3	R814	D3	R1043	M5	R1409	H2	R1507	H3	R1643	*P8	R1824	H1	R2502	K9	R3610	G6	R4215	*M11	RB905	P2	TP212	C11
L5005	*N9	R245	*B6	R408	H12	R553	E3	R717	D3	R815	D2	R1044	M5	R1410	*H2	R1508	H3	R1644	*P8	R1825	H1	R2601	H8	R3611	G5	R4216	*M11	RB906	*P2	TP213	C8
L5006	*P9	R246	*B2	R409	R11	R554	E3	R718	D3	R816	D2	R1045	M5	R1411	*H2	R1509	H3	R1645	*P8	R1826	H1	R2602	H8	R3701	*G4	R4217	*M11	RB907	*P2	TP402	*H12
L5007	*M8	R247	*B4	R411	H12	R555	D3	R719	D3	R817	D3	R1046	M5	R1412	G2	R1510	J3	R1646	*P8	R1827	H1	R2603	*E5	R3702	*G4	R4218	*M11	RB908	*P2	TP403	R11
L5008	*M8	R248	*B4	R412	H12	R556	E3	R720	D3	R818	D3	R1047	M5	R1413	*H2	R1511	J3	R1647	*P8	R1828	H1	R2604	*J5	R3703	*G4	R4219	*M11	RB909	*P2	TP405	C12
		R249	*B1	R413	R11	R557	E3	R721	D3	R819	E1	R1048	M5	R1414	G2	R1512	H3	R1701	*E11	R1829	H1	R2701	*E10	R3704	*G4	R4301	*E8	RB910	P3	TP406	R10
Q201	C12	R250	*B1	R414	R11	R558	D3	R722	D3	R820	D3	R1049	M5	R1415	*H2	R1513	H3	R1702	*E11	R1830	H1	R2702	*P10	R3705	G5	R4302	*E8	RB911	P3	TP407	C12
Q202	B11	R251	*B6	R415	H12	R559	D3	R723	D3	R821	D2	R1050	M5	R1416	G2	R1514	H3	R1703	*D10	R1831	H1	R2703	*G11	R3706	G4	R4303	*F9	RB912	P3	TP408	R11
Q203	B10	R252	*B6	R416	R11	R560	D3	R724	E3	R822	E3	R1051	M5	R1417	*H2	R1515	H3	R1704	*D10	R1832	H1	R2704	*J11	R3801	E11	R4304	*F9	RB913	P3	TP501	B13
Q204	B4	R253	*B2	R418	H12	R561	D3	R725	E3	R823	E3	R1052	M5	R1418	G2	R1516	G3	R1705	*G11	R1833	H1	R2705	*L11	R3802	E10	R4305	*E9	RB914	P2	TP502	R4
Q205	B9	R254	*B2	R419	R11	R562	D3	R726	E2	R824	E3	R1053	M5	R1419	*H2	R1517	H3	R1706	*G11	R1834	H1	R2801	*P9	R3803	E10	R4501	*L8	RB915	P2	TP1001	R4
Q206	B6	R255	C5	R421	C12	R563	D3	R727	D2	R825	E3	R1054	M5	R1420	G2	R1518	G3	R1707	*F11	R1835	*H5	R2802	*N9	R3804	E10	R4502	*L8	RB916	P2	TP1002	R4
Q207	B5	R256	C2	R422	R10	R564	D3	R728	E2	R826	E3	R1055	M5	R1421	*H2	R1519	H3	R1708	*G11	R1836	*J11	R2803	R8	R3805	E10	R4503	*M9	RB917	*P3		
Q208	C2	R257	C7	R427	C12	R565	*D3	R729	E2	R827	E3	R1056	M4	R1422	G2	R1520	G3	R1709	*J11	R1837	H3	R2804	R8	R3806	*E11	R4504	*M9	RB918	*P3	X501	L4
Q209	B7	R258	C3	R428	R10	R566	E3	R730	E3	R828	E3	R1057	M4	R1423	*H2	R1521	H3	R1710	*J11	R1838	*N11	R2805	R8	R3807	*E11	R4505	*L9	RB919	*P3		
Q210	B3	R259	B12	R430	C12	R567	E3	R731	*D3	R829	E3	R1058	N4	R1424	*H2	R1522	G3	R1711	*J11	R1839	*G11	R2806	R8	R3808	*D11	R4701	G8	RB920	*P3		
Q211	B12	R260	*B11	R431	C12	R568	B12	R732	E3	R830	E3	R1059	M4	R1425	H2	R1523	H3	R1712	*J11	R1840	*L11	R2807	*P9	R3809	*E11	R4702	G8	RB921	*P2		
Q212	B8	R261	*B11	R432	C12	R601	*E11	R733	D3	R831	E3	R1060	N4	R1426	*H2	R1524	G3	R1713	*D10	R1841	*E11	R2808	*P9	R3810	*E10	R4703	G8	RB922	*P2		
Q301	*E1	R262	*B11	R433	R10	R602	*E11	R734	D3	R832	E3	R1061	N5	R1427	*H2	R1525	H3	R1714	*D10	R1842	M3	R2809	*P9	R3811	*E10	R4704	G8	RB923	*P2		
Q302	*E1	R263	*B11	R434	R10	R603	*N11	R735	D3	R833	E3	R1062	N5	R1428	*H2	R1526	G3	R1715	*F11	R1843	M3	R2810	*P9	R3812	*F10	R4705	*G8	RB924	*P3		
Q303	*E1	R264	C11	R435	R10	R604	*P11	R736	D3	R834	E3	R1063	N5	R1429	*H2	R1527	H3	R1716	*F11	R1844	M3	R2811	*N9	R3813	*F10	R4706	*G8	RB925	*P3		
Q304	E1	R265	B8	R437	C12	R605	*J11	R737	D3	R835	E3	R1064	N5	R1430	*H2	R1528	H3	R1717	*J11	R1845	M2	R2812	*N9	R3814	*F10	R4707	*G8	RB926	*P3		
Q305	*D1	R266	*B7	R438	R10	R606	*J11	R738	D3	R836	E3	R1065	N5	R1431	H2	R1529	H3	R1718	*J11	R1846	*L8	R2813	*N9	R3815	*F10	R4708	*G8	RB1101	*F2		
Q306	D1	R267	*B7	R439	C12	R607	*D10	R739	D3	R837	E3	R1066	N5	R1432	*H2	R1530	H3	R1719	*E10	R1847	*E8	R2814	*N9	R3816	*F10	R4709	G8	RB1102	*F2		
Q307	*E1	R268	*B7	R440	R12	R608	*N11	R740	D3	R838	E3	R1067	N5	R1433	*H2	R1531	G1	R1720	*E10	R1848	M3	R2815	P10	R3817	*F10	R4710	G8	RB1103	*G2		
Q308	E1	R269	*B7	R442	C12	R609	*J11	R741	D2	R839	E3	R1068	N5	R1434	*H2	R1532	H3	R1721	*G11	R1849	M3	R2816	N9	R3818	*E10	R4711	*H8	RB1104	*G2		
Q309	*D1	R270	C8	R443	R12	R610	D10	R742	D4	R840	E3	R1069	N5	R1435	*H2	R1533	H3	R1722	*G11	R1850	*H9	R2901	*P7	R3819	*E10	R5001	*P8	RB1105	*G2		
Q310	D1	R301	*C1	R444	C12	R611	D10	R743	E2	R841	C2	R1070	N5	R1436	H2	R1534	H3	R1723	*J11	R1851	*E5	R2902	*N7	R3901	P11	R5002	*P8	RB1106	*G2		
Q311	*D1	R302	*C1	R445	C12	R612	D10	R744	D2	R842	C2	R1071	N5	R1437	*H2	R1535	H3	R1724	*J11	R1852	M3	R2903	*P8	R3902	P11	R5003	*N9	RB1107	*G2		
Q312	D1	R303	*C1	R446	C12	R613	D10	R745	D4	R843	C2	R1072	N5	R1438	*H2	R1536	H3	R1725	*E10	R1853	H1	R2904	*P8	R3903	P11	R5004	*N9	RB1108	N3		
Q313	*D1	R304	E1	R447	R11	R614	D10	R746	D2	R844	C2	R1073	P5	R1439	H2	R1537	J3	R1726	*E10	R1854	H1	R2905	*P8	R3904	P10	R5005	*N9	RB1109	N3		
Q314	*D1	R305	E1	R448	R11	R615	D10	R747	D3	R845	C2	R1074	P5	R1440	*H2	R1538	J3	R1727	*G11	R2001	*F12	R2906	*P8	R3905	P11	R5006	*N9	RB1110	N3		
Q315	*D2	R306	E1	R449	R11	R616	N10	R748	D4	R846	C2	R1075	P5	R1441	H3	R1539	*H3	R1728	*G11	R2002	*E12	R2907	*N8	R3906	*N11	R5007	*P9	RB1111	P3		
Q316	*D2	R307	*E1	R455	C12	R617	N11	R749	E2	R847	E3	R1076	P5	R1442	H3	R1540	H3	R1729	*J11	R2003	*F12	R2908	*N8	R3907	*N11	R5008	*P9	RB1112	N3		
Q317	*C1	R308	F1	R456	R11	R618	N10	R750	D3	R848	E3	R1077	M5	R1443	H2	R1541	J3	R1730	*J11	R2004	*F12	R2909	*N8	R3908	*N11	R5009	*P8	RB1113	N3		
Q318	*C1	R309	F1	R464	C1	R619	N10	R751	D4	R849	*D3	R1078	M5	R1444	H2	R1542	J3	R1731	*P11	R2005	*E12	R2910	*N8	R3909	*N11	R5010	*P8	RB1114	P3		
Q319	*C2	R310	E1	R465	D1	R620	N10	R752	D4	R850	*D3	R1079	N5	R1445	H3	R1543	*H3	R1732	*P11	R2006	*D12	R2911	N7	R3910	*N10	R5011	*N8	RB1115	M3		
Q320	*C2	R311	E1	R466	C1	R621	N10	R753	E2	R852	D3	R1080	N5	R1446	H3	R1544	H3	R1733	*N10	R2007	*F12	R2912	N7	R3911	*N10	R5012	*N8	RB1116	N3		
Q321	*D1	R312	E1	R467	D1	R622	H11	R754	D4	R853	D3	R1081	N5	R1447	G2	R1545	H3	R1734	*N10	R2008	*E12	R3001	*P5	R3912	*P10	R5013	*N8	RB1117	N3		
Q322	*D1	R313	*E1	R468	C1	R623	H11	R755	D4	R901	L1	R1082	N5	R1448	H2	R1546	H3	R1735	*L11	R2009	*F12	R3002	*P5	R3913	*P10	R5014	*N8	RB1118	N3		
Q404	C1	R314	F1	R469	D1	R624	H11	R756	D4	R902	L1	R1083	N5	R1449	*G3	R1547	H3	R1736	*L11	R2010	*F12	R3003	E4	R3914	*P10	R5019	*P8	RB1119	N3		
Q405	D1	R315	F1	R470	*C1	R625	H11	R757	D4	R903	P3	R1084	N5	R1450	*G3	R1548	H3	R1737	*L11	R2011	*E12	R3004	F4	R3915	*P10	R5201	*E5	RB1120	N3		
Q406	C1	R316	E1	R471	*C1	R626	H11	R758	E3	R904	P3	R1201	E3	R1451	*G3	R1549	F1	R1738	*L11	R2012	*D12	R3005	E3	R3916	*P10	R5202	*D5	RB1121	N3		
Q407	D1	R317	E1	R472	*C1	R627	*P9	R759	*D3	R905	P3	R1202	E2	R1452	*G3	R1550	F1	R1739	*N10	R2013	F12	R3006	E3	R3917	*P10	R5203	*E4	RB1122	M3		

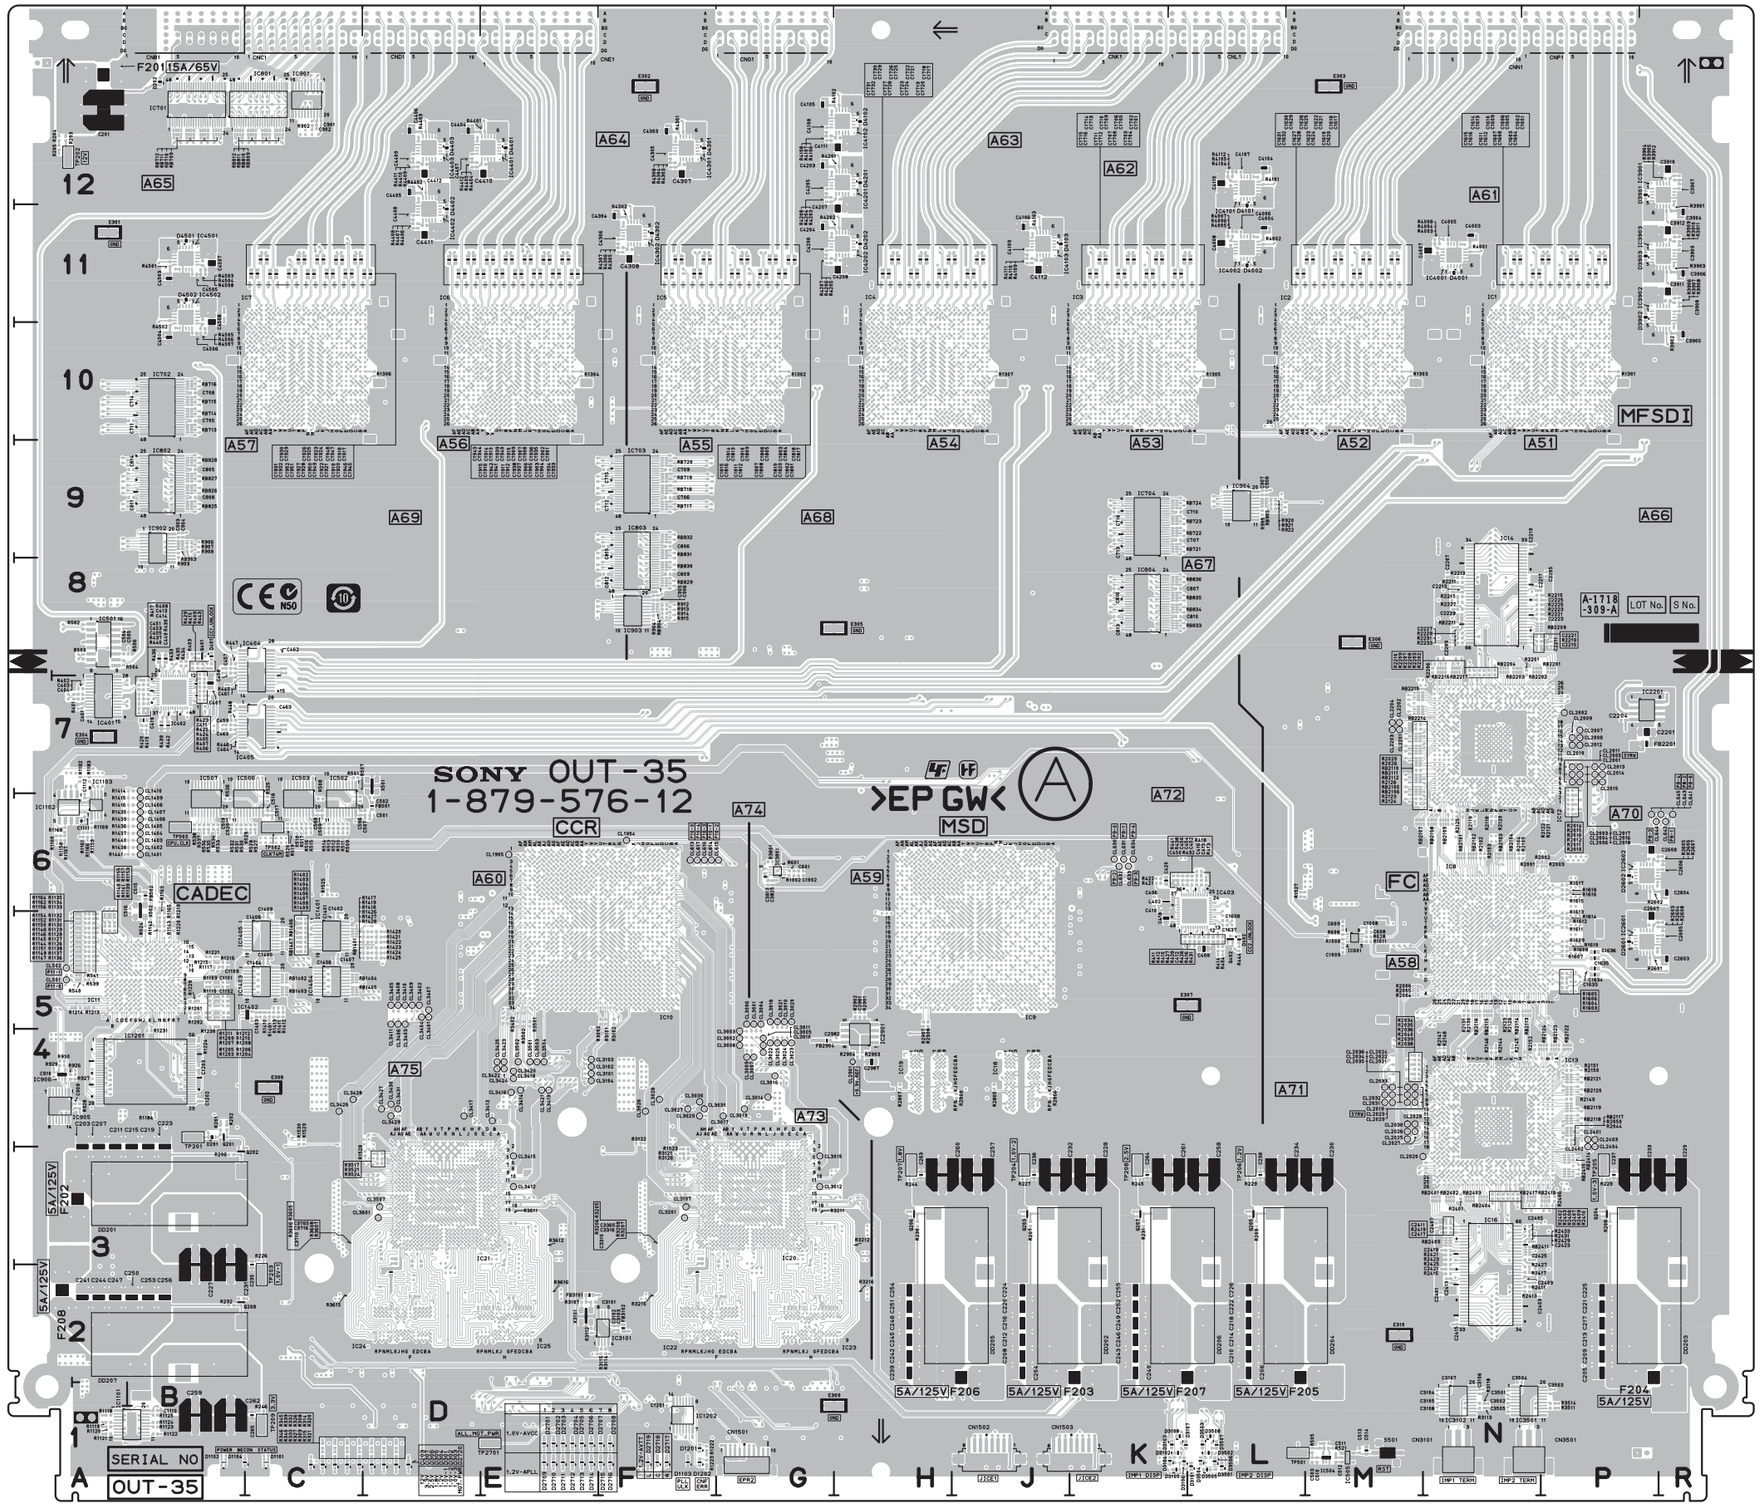

OUT-35/35A -A SIDE-
SUFFIX: -12

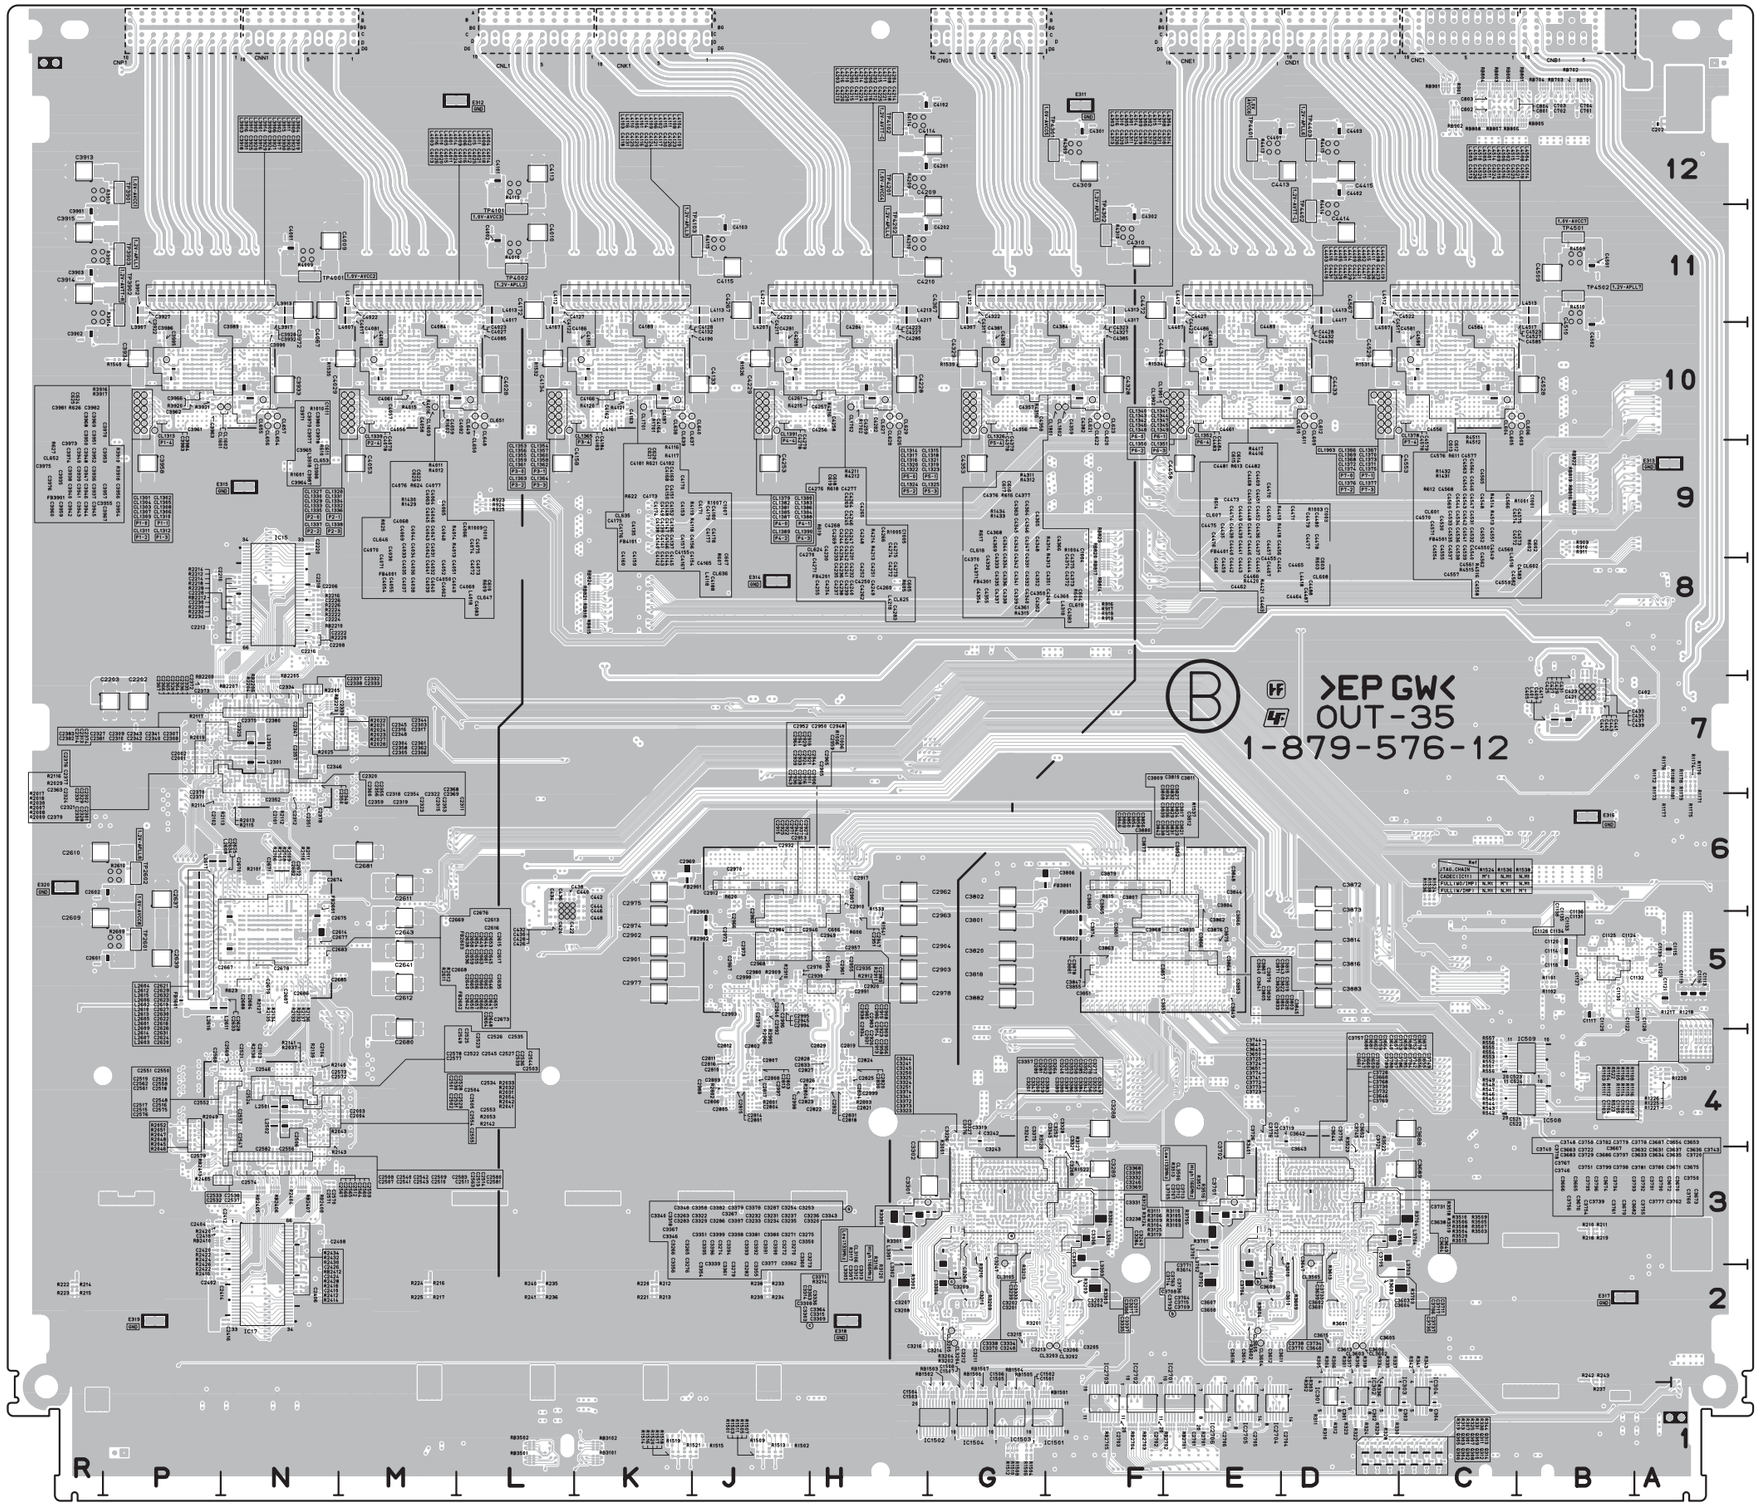

OUT-35/35A -B SIDE-
SUFFIX: -12

OUT-35/35A (1-879-576-12)

*:B SIDE

C201	A12	C423	*B7	C701	*B12	C1139	*A5	C1801	G11	C2212	*P8	C2373	*P7	C2555	*N4	C2663	*N5	C2926	*J5	C3210	*G2	C3326	*G4	C3613	*D2	C3729	*D3	C3821	*E5	C3927	*P11
C202	*A12	C424	*L5	C702	*B12	C1201	F1	C1802	G11	C2213	N8	C2374	*N7	C2556	*N3	C2664	*N5	C2927	*J6	C3211	*G2	C3327	*G4	C3614	*E2	C3730	*D3	C3822	*E5	C3928	*N11
C203	A3	C425	*B7	C703	*B12	C1202	B4	C1803	G11	C2214	*N8	C2375	*N7	C2557	*N4	C2665	*N5	C2928	*J5	C3212	*G2	C3328	*F4	C3615	*D2	C3731	*D3	C3823	*E5	C3929	*P11
C204	J2	C426	*L5	C704	*B12	C1203	B4	C1804	G11	C2215	N8	C2376	*N7	C2558	*N4	C2666	*N5	C2929	*J6	C3213	*G2	C3329	*G3	C3616	*E2	C3732	*D3	C3824	*E5	C3930	*N11
C205	P2	C427	*B7	C705	B10	C1401	C5	C1805	G11	C2216	*N8	C2377	*N7	C2559	*N3	C2667	*N5	C2930	*J5	C3214	*G2	C3330	*F3	C3631	*D3	C3733	*D3	C3825	G6	C3931	*P11
C206	L2	C428	*L5	C706	F9	C1402	C5	C1806	G11	C2217	N8	C2378	*N6	C2560	*N3	C2668	*N5	C2931	*J5	C3215	*G2	C3331	*F3	C3632	*D3	C3734	*D3	C3826	*E5	C3932	*N11
C207	A3	C429	*B7	C707	K9	C1403	C5	C1807	G11	C2218	*N8	C2379	*P7	C2561	*N4	C2669	*N6	C2932	*J6	C3216	*H2	C3332	*F3	C3633	*D3	C3735	*D3	C3827	*E6	C3933	*N10
C208	J2	C430	*L6	C708	B10	C1404	C5	C1808	G11	C2219	N9	C2380	*N7	C2562	*N4	C2670	*N6	C2933	*J5	C3231	*G3	C3333	*G3	C3634	*D3	C3736	*E3	C3828	*E5	C3934	*P10
C209	P2	C431	*B7	C709	F9	C1405	C5	C1809	F11	C2220	*N9	C2381	*N7	C2563	*N3	C2671	*N6	C2934	*J5	C3232	*G3	C3334	*G3	C3635	*D3	C3737	*D3	C3829	*E5	C3935	*P10
C210	L2	C432	*L6	C710	K9	C1406	C5	C1810	F11	C2221	N8	C2382	*N7	C2564	*N3	C2672	*N6	C2935	*H5	C3233	*G3	C3335	*F3	C3636	*D3	C3738	*D3	C3830	*F5	C3936	*P10
C211	A3	C433	*B7	C711	B10	C1407	C5	C1811	F11	C2222	*N8	C2383	*N7	C2565	*N3	C2673	*N5	C2936	*J5	C3234	*G3	C3336	*G3	C3637	*D3	C3739	*D3	C3831	*E5	C3937	*P10
C212	J2	C434	*L6	C712	F9	C1408	C5	C1812	F11	C2223	N8	C2401	N2	C2566	*N3	C2674	*N6	C2937	*J6	C3235	*G3	C3337	*F3	C3638	*D3	C3740	*E3	C3832	*E6	C3938	*P10
C213	P2	C435	*B7	C713	K9	C1409	C5	C1813	F11	C2224	*N8	C2402	*P2	C2567	*N3	C2675	*N5	C2938	*J5	C3236	*G3	C3338	*G3	C3639	*D3	C3741	*E3	C3833	*E5	C3939	*P10
C214	L2	C436	*L6	C714	B10	C1501	*G1	C1814	F11	C2225	N8	C2403	N2	C2568	*P4	C2676	*N6	C2939	*J5	C3237	*G3	C3339	*G3	C3640	*D3	C3742	*D3	C3834	*F6	C3940	*P10
C215	B3	C437	*B7	C715	F9	C1502	*G1	C1815	F11	C2226	*N8	C2404	*P3	C2569	*N4	C2677	*N5	C2940	*J5	C3238	*F3	C3340	*G3	C3641	*E3	C3743	*D3	C3835	*E5	C3941	*P10
C216	J2	C438	*L6	C716	K9	C1503	*H1	C1816	F11	C2227	N8	C2405	N3	C2570	*N3	C2678	*N5	C2941	*J6	C3239	*G3	C3341	*G3	C3642	*D4	C3744	*E4	C3836	*F5	C3942	*P10
C217	P2	C439	*B7	C801	*C12	C1504	*H1	C1817	G11	C2228	*N8	C2406	*N2	C2571	*N3	C2679	*N5	C2942	*J6	C3240	*G3	C3342	*G3	C3643	*D4	C3745	*D4	C3837	*F5	C3943	*P10
C218	L2	C440	*K6	C802	*C12	C1505	*G1	C1818	G11	C2229	N8	C2407	N3	C2572	*N4	C2680	*M4	C2943	*J5	C3241	*G3	C3343	*F3	C3644	*D4	C3746	*D3	C3838	*F5	C3944	*P10
C219	B3	C441	*B7	C803	*C12	C1506	*G1	C1819	G11	C2230	*N8	C2408	*N3	C2573	*N4	C2681	*M6	C2944	*J5	C3242	*G4	C3344	*G4	C3645	*E3	C3747	*D3	C3839	*F5	C3945	*P10
C220	J2	C442	*K6	C804	*C12	C1507	*G1	C1820	G11	C2301	*N7	C2409	N2	C2574	*N3	C2682	*N6	C2945	*J5	C3243	*G4	C3345	*F4	C3646	*D3	C3748	*D3	C3840	*F5	C3946	*P10
C221	P2	C443	*B7	C805	B9	C1508	*G1	C1901	E11	C2302	*N7	C2410	*N2	C2575	*N3	C2683	*N5	C2946	*J5	C3244	*G4	C3346	*G3	C3647	*D3	C3749	*D3	C3841	*F5	C3947	*P10
C222	L2	C444	*K6	C806	F9	C1601	P11	C1902	E11	C2303	*N7	C2411	N3	C2576	*N3	C2684	*N5	C2947	*H5	C3245	*G3	C3347	*G3	C3648	*D3	C3750	*D3	C3842	*F5	C3948	*P10
C223	B3	C445	*B7	C807	K8	C1602	P11	C1903	E11	C2304	*N7	C2412	*P3	C2577	*N4	C2685	*N5	C2948	*H6	C3246	*F3	C3348	*G3	C3649	*D3	C3751	*D3	C3843	*E5	C3949	*P10
C224	J2	C446	*K5	C808	B9	C1603	P11	C1904	E11	C2305	*N7	C2413	N2	C2578	*N4	C2686	*N5	C2949	*H5	C3247	*G3	C3349	*G3	C3650	*E3	C3752	*D3	C3844	*E6	C3950	*P10
C225	P2	C447	*B7	C809	F8	C1604	P11	C1905	E11	C2306	*N7	C2414	*N2	C2579	*P3	C2687	*N5	C2950	*J6	C3248	*G3	C3350	*G3	C3651	*E3	C3753	*D3	C3845	*E5	C3951	*P10
C226	L2	C448	*K5	C810	K8	C1605	P11	C1906	E11	C2307	*N7	C2415	N2	C2580	*N3	C2688	*N5	C2951	*H5	C3249	*F3	C3351	*G3	C3652	*D4	C3754	*D3	C3846	*F6	C3952	*P10
C227	B2	C449	B7	C811	B9	C1606	P11	C1907	E11	C2308	*N7	C2416	*N2	C2581	*N3	C2701	*E1	C2952	*J6	C3250	*G3	C3352	*G3	C3653	*D3	C3755	*D3	C3847	*F5	C3953	*N10
C228	K3	C450	K6	C812	F8	C1607	P11	C1908	E11	C2309	*N7	C2417	N3	C2582	*N3	C2702	*F1	C2953	*J6	C3251	*G3	C3353	*G3	C3654	*D3	C3756	*D3	C3848	*E6	C3954	*N10
C229	R3	C451	B7	C813	K8	C1608	P11	C1909	E11	C2310	*N7	C2418	*P3	C2583	*N3	C2703	*F1	C2954	*H5	C3252	*F4	C3354	*G3	C3655	*D3	C3757	*D3	C3849	*E5	C3955	*P10
C230	M3	C452	L6	C814	B9	C1609	P11	C1910	E11	C2311	*N7	C2419	N3	C2601	*P5	C2704	*D1	C2955	*H5	C3253	*G3	C3355	*G3	C3656	*D3	C3758	*D3	C3850	*F6	C3956	*N10
C231	B2	C453	B7	C815	F9	C1610	P11	C1911	E11	C2312	*N7	C2420	*P3	C2602	*P6	C2705	*E1	C2956	*J5	C3254	*G3	C3356	*G3	C3657	*D3	C3759	*D3	C3851	*F5	C3957	*N10
C232	J3	C454	K6	C816	K8	C1611	N11	C1912	E11	C2313	*N7	C2421	N2	C2603	R5	C2706	*E1	C2957	*H5	C3255	*G3	C3357	*G3	C3658	*D3	C3760	*D3	C3852	*E6	C3958	*P9
C233	P3	C455	B7	C901	C12	C1612	N11	C1913	D11	C2314	*N7	C2422	*P2	C2604	R6	C2801	*J4	C2958	*J5	C3256	*G3	C3358	*G3	C3659	*D3	C3761	*D3	C3853	*E5	C3959	*P10
C234	L3	C456	K6	C902	C12	C1613	N11	C1914	D11	C2315	*N7	C2423	N3	C2605	R5	C2802	*J4	C2959	*H6	C3257	*G3	C3359	*G3	C3660	*D3	C3762	*D3	C3854	*F6	C3960	*P10
C235	C2	C457	B8	C903	B9	C1614	N11	C1915	D11	C2316	*N7	C2424	*N3	C2606	R6	C2803	*J4	C2960	*J6	C3258	*G3	C3360	*G3	C3661	*D3	C3763	*E3	C3855	*F5	C3961	*P10
C236	J3	C458	B8	C904	B9	C1615	N11	C1916	D11	C2317	*N7	C2425	N3	C2607	P5	C2804	*J4	C2961	*H5	C3259	*G3	C3361	*G3	C3662	*D3	C3764	*E3	C3856	*E6	C3962	*P10
C237	P3	C459	B7	C905	F8	C1616	N11	C1917	C11	C2318	*N7	C2426	*N3	C2608	P6	C2805	*J4	C2962	*H6	C3260	*G3	C3362	*G3	C3663	*D3	C3765	D3	C3857	*E5	C3963	*P10
C238	L3	C460	B7	C906	F8	C1617	M11	C1918	C11	C2319	*N7	C2501	*N4	C2609	*R5	C2806	*J4	C2963	*H5	C3261	*G3	C3363	*G3	C3664	*D3	C3766	*D3	C3858	*F6	C3964	*N10
C239	H2	C461	B7	C907	L9	C1618	M11	C1919	C11	C2320	*N7	C2502	*N4	C2610	*R6	C2807	*J4	C2964	*J6	C3262	*G3	C3364	*G3	C3665	*D3	C3767	*D3	C3859	*E5	C3965	*N10
C240	K2	C462	C8	C908	L9	C1619	M11	C1920	C11	C2321	*N7	C2503	*N4	C2611	*M6	C2808	*J4	C2965	*H5	C3263	*G3	C3365	F3	C3666	*D3	C3768	*D3	C3860	*E5	C3966	*P10
C241	A2	C463	C7	C909	A4	C1620	M11	C1921	C11	C2322	*N7	C2504	*N4	C2612	*M5	C2809	*J4	C2966	*J5	C3264	*G3	C3366	*F3	C3667	*D3	C3769	*D3	C3861	*F5	C3967	*N10
C242	H2	C464	B7	C910	A4	C1621	M11	C1922	C11	C2323	*N7	C2505	*N4	C2613	*N6	C2810	*J4	C2967	*J5	C3265	*G3	C3367	*G3	C3668	*D3	C3770	*D3	C3862	*E5	C3968	*P10
C243	K2	C501	D6	C1001	*C10	C1622	M11	C1923	C11	C2324	*N7	C2506	*N4	C2614	*N5	C2811	*J4	C2968	*J5	C3266	*G3	C3368	*F3	C3669	*E3	C3771	*E3	C3863	*F5	C3969	*P10
C244	A2	C502	D6	C1002	G6	C1623	M11	C1924	C11	C2325	*N7	C2507	*N3	C2615	*N5	C2812	*J4	C2969	*K6	C3267	*G3	C3369	*F3	C3670	*D3	C3772	*E3	C3864	*E5	C3970	*N10
C245	H2	C503	M1	C1003	*D10	C1624	M11	C1925	C11	C2326	*N7	C2508	*N3	C2616	*N5	C2813	*J4	C2970	*J6	C3268	*F3	C3370	*G3	C3671	*D3	C3773	*E3	C3865	*F5	C3971	*N10
C246	K2	C504	A8	C1004	*F10	C1625	M11	C1926	C11	C2327	*N7	C2509	*N3	C2617	*N5	C2814	*J4	C2971	*J6	C3269	*G3	C3371	*G3	C3672	*D3	C3774	*E3	C3866	*E6	C3972	*N11
C247	A2	C505	B8	C1005	*H10	C1626	M11	C1927	C11	C2328	*N7	C2510	*N3	C2618	*P5	C2815	*J4	C2972	*J5	C3270	*G3	C3372	*G3	C3673	*D3	C3775	*D4	C3867	*F5	C3973	*P10
C248	H2	C506	C6	C1006	*H6	C1627	M11	C1928	C11	C2329	*N7	C2511	*N3	C2619	*P5	C2816	*J4	C2973	*J5	C3271	*G3	C3373	*G3	C3674	*D3	C3776	*E4	C3868	*E5	C3974	*P10
C249	K2	C507	D6	C1007	*K10	C1628	M11	C1929	C11	C2330	*N7	C2512	*N3	C2620	*P5	C2817	*J4	C2974	*K5	C3272	*G3	C3374	*G3	C3675	*D3	C3777	*D3	C3869	*F6	C3975	*P10
C250	B2	C508	C6	C1008	M5	C1629	M11	C1930	C11	C2331	*N7	C2513	*N3	C2621	*P6	C2818	*H4	C2975	*K6	C3273	*G3	C3375	*G4	C3676	*D3	C3778	*D3	C3870	*F5	C3976	*P10
C251	H2	C509	C6	C1009	M5	C1630	M11	C1931	C11	C2332	*N7	C2514	*N3	C2622	*P5	C2819	*H4	C2976	*J5	C3274	*G3	C3376	*G4	C3677	*D3	C3779	*D3	C3871	*E5	C3977	*N10
C252	K2	C510	M1	C1010	*L10	C1631	L11	C1932	C11	C2333	*N7	C2515	*N3	C2623	*P6	C2820	*H4	C2977	*K5	C3275	*G3	C3377	*G3	C3678	*D3	C3780	*D3	C3872	*D6	C3978	*N10
C253	B2	C511	M1	C1011	*N10	C1632	L11	C1933	E11	C2334	*N7	C2516	*N4	C2624	*P5	C2821	*H4	C2978	*H5	C3276	*G3	C3378	*G3	C3679	*D3	C3781	*D3	C3873	*D5	C3979	*N10
C254	H2	C512	M1	C1101	B5	C1633	P5	C1934	E11	C2335	*N7	C2517	*N4	C2625	*N6	C2822	*H4	C2979	*J5	C3277	*G3	C3379	*G3	C3680	*D3	C3782	*D3	C3874	*F5	C3980	*N10
C255	K2	C513	M1	C1102	B5	C1634	P5	C1935	E11	C2336	*N7	C2518	*N4	C2626	*P5	C2823	*H4	C2980	*J5	C3278	*G3	C3380	*G3	C3681	*D3	C3783	*D3	C3875	*E5	C3981	*P10
C256	B2	C514	M1	C1103	*A4	C1635	P5	C1936	E11	C2337	*N7	C2519	*N4	C2627	*P5	C2824	*H4	C2981	H5	C3279	*G3	C3381	*G3	C3682	*D3	C3784	*D3	C3876	*E5	C3982	*P10
C257	J3	C515	B6	C1104	*A4	C1636	P5	C1937	E11	C2338	*N7	C2520	*N4	C2628	*N5	C2825	*H4	C2982	H4	C3280	*G3	C3382	*G3	C3683	*D3	C3785	*D3	C3877	*F6	C3983	*P10
C258	L3	C516	B5	C1105	*A4	C1637	L5	C1938	E11	C2339	*N7	C2521	*N4	C2629	*P6	C2826	*H4	C2983	*J5	C3281	*G3	C3383	*G3	C3684	*D3	C3786	*D3	C3878	*F5	C3984	*P10
C259	B1	C517	C6	C1106	*A4	C1638	L5	C1939	E11	C2340	*N7	C2522	*N4	C2630	*P5	C2827	*H4	C2984	*J5	C3282	*G3	C3384	*G3	C3685	*D3	C3787	*D3	C3879	*F6	C3985	*P10
C260	H3	C518	C6	C1107	*A4	C1701	L11	C1940	E11	C2341	*N7	C2523	*N4	C2631	*P5	C2828	*H4	C2985	*J5	C3283	*G3	C3385	*G3	C3686	*D3	C3788	*D3	C3880	*E6	C3986	*P10
C261	K3	C519	B6	C1108	*A4	C1702	K11	C1941	E11	C2342	*N7	C2524	*N4	C2632	*P6	C2829	*H4	C2986	*J5	C3284	*F3	C3386	*G3	C3687	*D3	C3789	*D3	C3881	*F5	C3987	*N10
C262	B1	C520	B6	C1109	B5	C1703	K11	C1942	D11	C2343	*N7	C2525	*N4	C2633	*P5	C2830	*H4	C2987	H4	C3285	*G3	C3387	*G3	C3688	*C4	C3790	*D3	C3882	*G5	C3988	*N10
C263	H3	C521	*B4	C1110	B1	C1704	K11	C1943	D11	C2344	*N7	C2526	*N4	C2634	*P6	C2831	*H4	C2988	*J4	C3286	*G3	C3388	*G3	C3689	*C3	C3791	*D3	C3883	*D5	C3989	*N10
C264	K3	C522	*B4	C1111	A6	C1705	K11	C1944	D11	C2345	*N7	C2527	*N4	C2635	*N5	C2832	*H4	C2989	*H5	C3287	*G3	C3389	*G3	C3701	*E3	C3792	*D3	C3884	*E6	C3990	*N10
C265	C1	C523	*B4	C1112	A6	C1706	K11	C1945	D11	C2346	*N7	C2528	*N4	C2636	*N5	C2833	*H4	C2990	*J5	C3288	*F4	C3390	*G3	C3702	*E3	C3793	*D3	C3885	*F6	C4001	*N11
C301	*D1	C524	*B4	C1113	*A5	C1707	K11	C1946	D11	C2347	*N7	C2529	*N4	C2637	*P6	C2834	*H4	C2991	*H5	C3289	*F3	C3391	*G3	C3703	*E3	C3794	*D3	C3901	*R11	C4002	*L11
C302	*D1	C601	G6	C1114	*B5	C1708	K11	C1947	C11	C2348	*N7	C2530	*N4	C2638	*N5	C2901	*K5	C2992	*J5	C3301	*G3	C3392	*G3	C3704	*E2	C3795	*D3	C3902	*R10	C4003	N11
C303	*C1	C602	*C10	C1115	*A5	C1709	K11	C1948	C11	C2349	*N7	C2531	*N4	C2639	*P5	C2902	*K5	C2993	*J5	C3302	*G3	C3393	*G3	C3705	*D3	C3796	*D3	C3903	*R11	C4004	L11
C304	*C1	C603	*D10	C1116	*A5	C1710	K11	C1949	C11	C2350	*N7	C2532	*P3	C2640	*N5	C2903	*H5	C2994	*J5	C3303	*G3	C3394	*G3	C3706	*D3	C3797	*D3	C3904	R11	C4005	N11
C401	A7	C604	*F10	C1117	*B5	C1711	K11	C1950	C11	C2351	*N6	C2533	*P3	C2641	*M5	C2904	*H5	C2995	*J5	C3304	*G2	C3395	*G3	C3707	*E3	C3798	*D3	C3905	R10	C4006	L11
C402	*A7	C605	*H10	C1118	*B5	C1712	K11	C1951	C11	C2352	*N6	C2534	*N4	C2642	*N5	C2905	*H5	C2996	*J5	C3305	*F3	C3396	*G3	C3708	*E3	C3799	*D3	C3906	R11	C4007	N11
C403	A7	C606	*H5	C1119	*A5	C1713	K11	C1952	C11	C2353	*N7	C2535	*N4	C2643	*M5	C2906	*J5	C2997	*J4	C3306	*F3	C3397	*G3	C3709	*E2	C3801	*G5	C3907	R12	C4008	L11
C404	A7	C607	*K10	C1120	*B5	C1714	K11	C2001	*P7	C2354	*N7	C2536	*N4	C2644	*N5	C2907	*H6	C2998	*J4	C3307	*H3	C3398	*G3	C3710	D2	C3802	*G6	C3908	R11	C4009	*N11
C405	*B7	C608	M5	C1121	*A5	C1715	K11	C2002	*P7	C2355	*N7	C2537	*N3	C2645	*N5	C2908	*J5	C2999	*H4	C3308	*G3	C3399	*G3	C3711	*D3	C3803	*E5	C3909	R11	C4010	*L11
C406	K6	C609	M5	C1122	*B5	C1716	K11	C2003	*M4	C2356	*N7	C2538	*N3	C2646	*N5	C2909	*J5	C3101	E2	C3309	*G2	C3501	N1	C3712	*E3	C3804	*E5	C3910	R12	C4011	*M11
C407	B7	C610	*L10	C1123	*A5	C1717	J11	C2004	*M4	C2357	*N7	C2539	*N4	C2647	*N5	C2910	*H6	C3102	F2	C3310	F2	C3502	N1	C3713	*E3	C3805	*F5	C3911	R11	C4012	*M11
C408	L5	C611	*N10	C1124	*B5	C1718	J11	C2101	*N6	C2358	*N7	C2540	*N3	C2648	*N5	C2911	*J5	C3103	F2	C3311	*F3	C3503	P1	C3714	*E3	C3806	*F6	C3912	R11	C4013	*M11
C409	*B7	C612	*C10	C1125	*B5	C1719	J11	C2102	*P6	C2359	*N7	C2541	*N3	C2649	*N5	C2912	*J6	C3104	N1	C3312	*G3	C3504	N1	C3715	*E2	C3807	*F6	C3913	*R12	C4014	*L11
C410	K6	C613	*C10	C1126	*B5	C1720	J11	C2103	*N4	C2360	*N7	C2542	*N3	C2650	*N5	C2913	*J5	C3105	N1	C3313	*G3	C3505	N1	C3716	D3	C3808	*F6	C3914	*R11	C4015	*M11
C411	B7	C614	*E10	C1127	*B5	C1721	J11	C2104	*N4	C2361	*N7	C2543	*N3	C2651	*N5	C2914	*J5	C3106	N1	C3314	*G3	C3601	*D2	C3717	*D3	C3809	*F6	C3915	*R11	C4016	*M11
C412	L5	C615	*E10	C1128	*A5	C1722	H11	C2201	P7	C2362	*N7	C2544	*N4	C2652	*N5	C2915	*J6	C3107	N1	C3315	*G2	C3602	*D2	C3718	*D3	C3810	*E6	C3916	*P11	C4017	*M11
C413	B7	C616	*G10	C1129	*B5	C1723	H11	C2202	*P7	C2363	*P7	C2545	*N4	C2653	*N5	C2916	*J5	C3108	N1	C3316	F3	C3603	*D2	C3719	*D4	C3811	*E6	C3917	*N11	C4018	*L11
C414	B7	C617	*G10	C1130	*B5	C1724	H11	C2203	*P7	C2364	*N7	C2546	*N4	C2654	*N5	C2917	*H6	C3201	*G2	C3317	*F3	C3604	*D2	C3720	*D3	C3812	*E5	C3918	*P11	C4019	*M11
C415	L6	C618	*H10	C1131	*B5	C1725	H11	C2204	P7	C2365	*N7	C2547	*N4	C2655	*N5	C2918	*J6	C3202	*G2	C3318	*G3	C3605	*D2	C3721	*D4	C3813	G6	C3919	*N11	C4020	*M11
C416	L6	C619	*H10	C1132	*B5	C1726	H11	C2205	P8	C2366	*N7	C2548	*N4	C2656	*N5	C2919	*J5	C3203	*F2	C3319	*G4	C3606	*D2	C3722	*D3	C3814	*D5	C3920	*P11	C4021	*L11
C417	*B7	C620	*K10	C1133	*B5	C1727	H11	C2206	*N8	C2367	*P7	C2549	*N4	C2657	*N5	C2920	*H5	C3204	*F2	C3320	*G3	C3607	*E2	C3723	*E3	C3815	*E5	C3921	*N11	C4022	*M11
C418	K5	C621	*K10	C1134	*B5	C1728	H11	C2207	N8	C2368	*N7	C2550	*N4	C2658	*N5	C2921	*J5	C3205	*F2	C3321	*F4	C3608	*E2	C3724	*E3	C3816	*D5	C3922	*P11	C4023	*L11
C419	B7	C622	*M10	C1135	*B5	C1729	H11	C2208	*N8	C2369	*N7	C2551	*N4	C2659	*N5	C2922	*J6	C3206	*F2	C3322	*G3	C3609	*E2	C3725	*E3	C3817	*E5	C3923	*N11	C4024	*M11
C420	K6	C623	*M10	C1136	*B5	C1730	H11	C2209	N8	C2370	*P7	C2552	*P4	C2660	*N5	C2923	*J5	C3207	*H2	C3323	*G3	C3610	*D2	C3726	*E4	C3818	*G5	C3924	*P11	C4025	*M11
C421	*B7	C624	*P10	C1137	*A5	C1731	H11	C2210	*P8	C2371	*P6	C2553	*N4	C2661	*N5	C2924	*J5	C3208	*G2	C3324	*G3	C3611	*D2	C3727	*E4	C3819	*E5	C3925	*P11	C4026	*M11
C422	*K5	C625	*P10	C1138	*B5	C1732	H11	C2211	P8	C2372	*P7	C2554	*N4	C2662	*N5	C2925	*J6	C3209	*G2	C3325	*G3	C3612	*E2	C3728	*D4	C3820	*G5	C3926	*N11	C4027	*L11

C4028	*L10	C4134	*L10	C4235	*J10	C4341	*G10	C4447	*E10	C4548	*C10	CL651	*L10	CL1385	*J10	CL3018	G5	D303	D1	E315	*N9	IC804	K8	L3906	*N11	L4407	*E11	R236	*L2	R435	B8
C4029	*M10	C4135	*K10	C4236	*H10	C4342	*G10	C4448	*E10	C4549	*C10	CL652	*P10	CL1386	*J10	CL3019	G5	D304	C1	E316	*B6	IC901	C12	L3907	*P11	L4408	*D11	R237	*B1	R436	B8
C4030	*M10	C4136	*K10	C4237	*J10	C4343	*G10	C4449	*E10	C4550	*C10	CL653	*N10	CL1387	*J10	CL3020	G5	D305	C1	E317	*B2	IC902	B9	L3908	*N11	L4409	*E11	R238	*J2	R437	B7
C4031	*M10	C4137	*K10	C4238	*H10	C4344	*G10	C4450	*E10	C4551	*C10	CL654	*N10	CL1388	*J10	CL3021	G5	D306	C1	E318	*H2	IC903	F8	L3909	*P11	L4410	*E11	R239	*J2	R438	K6
C4032	*M10	C4138	*K10	C4239	*H10	C4345	*G10	C4451	*E10	C4552	*C10	CL655	*N10	CL1389	*J10	CL3022	G4	D307	C1	E319	*P2	IC904	L9	L3910	*P11	L4411	*D11	R240	*L2	R439	B7
C4033	*M10	C4139	*K10	C4240	*H10	C4346	*G10	C4452	*E10	C4553	*D9	CL656	*N10	CL1390	*J10	CL3023	G4	D401	B8	E320	*R6	IC905	A4	L3911	*N11	L4412	*E11	R241	*L2	R440	B7
C4034	*M10	C4140	*K10	C4241	*H10	C4347	*G10	C4453	*E10	C4554	*C10	CL657	*N10	CL1391	*J10	CL3024	G4	D402	L5			IC906	A4	L3912	*P11	L4413	*D11	R242	*B2	R441	K6
C4035	*M10	C4141	*K10	C4242	*H10	C4348	*F10	C4454	*E10	C4555	*C10	CL1301	*P10	CL1401	B6	CL3025	G4	D1101	C1	F201	A12	IC1101	B1	L3913	*N11	L4414	*E11	R243	*B2	R442	B7
C4036	*M10	C4142	*K10	C4243	*H10	C4349	*F10	C4455	*E10	C4556	*C10	CL1302	*P10	CL1402	B6	CL3026	F4	D1102	B1	F202	A3	IC1102	A6	L3914	*P11	L4415	*E11	R244	H3	R443	B8
C4037	*M10	C4143	*K10	C4244	*H10	C4350	*F10	C4456	*E10	C4557	*C10	CL1303	*P10	CL1403	B6	CL3027	F4	D1103	F1	F203	K2	IC1103	A6	L3915	*N11	L4416	*E11	R245	K3	R444	L5
C4038	*M10	C4144	*K10	C4245	*H10	C4351	*F10	C4457	*E10	C4558	*C10	CL1304	*P10	CL1404	B6	CL3028	F4	D1104	B1	F204	P2	IC1201	B4	L3916	*P11	L4417	*D11	R246	C1	R445	B8
C4039	*M10	C4145	*K10	C4246	*H10	C4352	*F10	C4458	*E9	C4559	*C10	CL1305	*P10	CL1405	B6	CL3029	F4	D1201	F1	F205	L2	IC1202	F1	L3917	*N11	L4418	*D10	R301	*D2	R446	B7
C4040	*M10	C4146	*K10	C4247	*H10	C4353	*G9	C4459	*E10	C4560	*C10	CL1306	*P10	CL1406	B6	CL3030	F4	D1202	F1	F206	J2	IC1401	C5	L3918	*N10	L4501	*C11	R302	*D1	R447	B8
C4041	*M10	C4147	*K10	C4248	*H10	C4354	*G10	C4460	*E10	C4561	*C10	CL1307	*P10	CL1407	B6	CL3031	F4	D2601	P5	F207	K2	IC1402	C5	L4001	*M11	L4502	*C11	R303	*D1	R448	B7
C4042	*M10	C4148	*K10	C4249	*H10	C4355	*G10	C4461	*E10	C4562	*C10	CL1308	*P10	CL1408	B6	CL3101	E4	D2602	P6	F208	A2	IC1403	C5	L4002	*M11	L4503	*D11	R304	*D2	R501	C7
C4043	*M10	C4149	*K10	C4250	*H10	C4356	*G10	C4462	*E10	C4563	*C10	CL1309	*P10	CL1409	B6	CL3102	E4	D2701	E1			IC1404	C5	L4003	*M11	L4504	*C11	R305	*D2	R502	A8
C4044	*M10	C4150	*K10	C4251	*H10	C4357	*G10	C4463	*E10	C4564	*C10	CL1310	*P10	CL1410	B7	CL3103	E4	D2702	E1	FB501	D6	IC1405	C5	L4004	*L11	L4505	*C11	R306	*D2	R503	A8
C4045	*M10	C4151	*K10	C4252	*H10	C4358	*G10	C4464	*E10	C4565	*C10	CL1311	*P10	CL1601	*N10	CL3104	E4	D2703	E1	FB502	B6	IC1501	*F1	L4005	*M11	L4506	*C11	R307	*D1	R504	A8
C4046	*M10	C4152	*K10	C4253	*J9	C4359	*F10	C4465	*D10	C4566	*C10	CL1312	*P10	CL1602	*N10	CL3105	*G3	D2704	E1	FB1601	*P5	IC1502	*G1	L4006	*M11	L4507	*D11	R308	D1	R505	M1
C4047	*M10	C4153	*K10	C4254	*J10	C4360	*F10	C4466	*E10	C4567	*D11	CL1313	*P10	CL1603	*M10	CL3106	*G3	D2705	E1	FB2201	P7	IC1503	*G1	L4007	*M11	L4508	*C11	R309	D1	R506	A8
C4048	*M10	C4154	*K10	C4255	*J10	C4361	*G10	C4467	*E10	C4568	*C10	CL1314	*G10	CL1701	*K10	CL3107	F3	D2706	E1	FB2601	*N5	IC1504	*G1	L4008	*L11	L4509	*C11	R310	*D1	R507	C6
C4049	*M10	C4155	*K10	C4256	*H10	C4362	*F10	C4468	*E10	C4569	*C10	CL1315	*G10	CL1702	*H10	CL3201	F3	D2707	F1	FB2602	*N5	IC2201	P7	L4009	*M11	L4510	*C11	R311	*D1	R508	C6
C4050	*M10	C4156	*K10	C4257	*H10	C4363	*G10	C4469	*E10	C4570	*C10	CL1316	*G10	CL1801	*F10	CL3202	*F2	D2708	F1	FB2603	*N5	IC2601	P5	L4010	*M11	L4511	*C11	R312	*D1	R509	C6
C4051	*M10	C4157	*K10	C4258	*H10	C4364	*G10	C4470	*E10	C4571	*C10	CL1317	*G10	CL1802	*F10	CL3203	*F2	D2709	E1	FB2901	*K6	IC2602	P6	L4011	*L11	L4512	*D11	R313	*D1	R510	C6
C4052	*M10	C4158	*L9	C4259	*H10	C4365	*F10	C4471	*D10	C4572	*C10	CL1318	*G10	CL1901	*E10	CL3204	*G2	D2710	E1	FB2902	*J5	IC2701	*E1	L4012	*M11	L4513	*B11	R314	D1	R511	C6
C4053	*M9	C4159	*K10	C4260	*H10	C4366	*F10	C4472	*F11	C4573	*C10	CL1319	*G10	CL1902	*E10	CL3205	*G2	D2711	E1	FB2903	*J5	IC2702	*F1	L4013	*L11	L4514	*C11	R315	D1	R512	C6
C4054	*M10	C4160	*K10	C4261	*H10	C4367	*G11	C4473	*E10	C4574	*C10	CL1320	*G10	CL1903	*D10	CL3401	D5	D2712	E1	FB2904	G4	IC2703	*F1	L4014	*M11	L4515	*C11	R316	*D2	R513	C6
C4055	*M10	C4161	*K10	C4262	*H10	C4368	*G10	C4474	*E10	C4575	*C10	CL1321	*G10	CL1904	F6	CL3402	D5	D2713	E1	FB3101	E2	IC2704	*E1	L4015	*M11	L4516	*C11	R317	*D2	R514	C6
C4056	*M10	C4162	*K10	C4263	*H10	C4369	*G10	C4475	*E10	C4576	*C10	CL1322	*G10	CL1905	E6	CL3403	D5	D2714	E1	FB3102	F2	IC2705	*E1	L4016	*M11	L4517	*B11	R318	*D2	R515	C6
C4057	*M10	C4163	*K10	C4264	*H10	C4370	*G10	C4476	*E10	C4577	*C10	CL1323	*G10	CL2001	P7	CL3404	D5	D2715	F1	FB3801	*F6	IC2706	*E1	L4017	*L11	L4518	*C10	R319	*D1	R516	C6
C4058	*M10	C4164	*K10	C4265	*H10	C4371	*G10	C4477	*D10	C4578	*C10	CL1324	*G10	CL2002	P7	CL3405	D5	D2716	F1	FB3802	*F5	IC2901	H4	L4018	*L10			R320	D1	R517	C6
C4059	*M10	C4165	*K10	C4266	*H10	C4372	*F10	C4478	*D10	C4579	*C10	CL1325	*G10	CL2003	P7	CL3406	D5	D2717	F1	FB3803	*F5	IC3101	F2	L4101	*K11	Q201	B4	R321	D1	R518	C6
C4060	*M10	C4166	*K10	C4267	*J11	C4373	*F10	C4479	*D10	C4580	*C10	CL1326	*G10	CL2004	P7	CL3407	D5	D2718	F1	FB3901	*P10	IC3102	N1	L4102	*K11	Q202	B3	R322	*D1	R519	C6
C4061	*M10	C4167	*K10	C4268	*J10	C4374	*F10	C4480	*D10	C4581	*C10	CL1327	*M10	CL2005	P7	CL3408	D5	D2719	F1	FB4001	*M10	IC3501	N1	L4103	*L11	Q203	J3	R323	*D1	R520	C6
C4062	*M10	C4168	*K10	C4269	*J10	C4375	*F10	C4481	*E10	C4582	*C10	CL1328	*M10	CL2006	P7	CL3409	D5	D2720	D1	FB4101	*K10	IC3801	G6	L4104	*K11	Q204	P3	R324	*D1	R521	M1
C4063	*M10	C4169	*K10	C4270	*J10	C4376	*G10	C4482	*E10	C4583	*C10	CL1329	*M10	CL2007	P7	CL3410	D5	D3101	L1	FB4201	*J10	IC3901	R12	L4105	*K11	Q205	L3	R325	*C1	R522	*A5
C4064	*M10	C4170	*K10	C4271	*J10	C4377	*G10	C4483	*E10	C4584	*C10	CL1330	*M10	CL2008	P7	CL3411	D5	D3102	K1	FB4301	*G10	IC3902	R11	L4106	*K11	Q206	H3	R326	C1	R523	*A4
C4065	*M10	C4171	*K10	C4272	*H10	C4378	*G10	C4484	*E10	C4585	*C10	CL1331	*M10	CL2009	P7	CL3412	E3	D3103	K1	FB4401	*E10	IC3903	R11	L4107	*L11	Q207	K3	R327	C1	R524	B5
C4066	*M10	C4172	*L11	C4273	*H10	C4379	*G10	C4485	*E10			CL1332	*M10	CL2010	P7	CL3413	E4	D3104	K1	FB4501	*C10	IC4001	N11	L4108	*K11	Q208	B2	R328	*D1	R525	C6
C4067	*N11	C4173	*K10	C4274	*H10	C4380	*G10	C4486	*E10	CL501	A5	CL1333	*M10	CL2011	P7	CL3414	E4	D3105	K1			IC4002	L11	L4109	*K11	Q301	*D1	R329	*D1	R526	B6
C4068	*M10	C4174	*K10	C4275	*H10	C4381	*G10	C4487	*D10	CL502	A5	CL1334	*M10	CL2012	P7	CL3415	E3	D3106	K1	IC1	P10	IC4101	L12	L4110	*K11	Q302	*D1	R330	*D1	R527	C6
C4069	*M10	C4175	*L10	C4276	*J10	C4382	*F10	C4488	*D10	CL601	*C10	CL1335	*M10	CL2013	P7	CL3416	E4	D3107	K1	IC2	M10	IC4102	H12	L4111	*K11	Q303	*D1	R331	*C1	R528	C6
C4070	*M10	C4176	*K10	C4277	*H10	C4383	*F10	C4489	*E10	CL602	*C10	CL1336	*M10	CL2014	P7	CL3417	D4	D3108	K1	IC3	K10	IC4103	J11	L4112	*L11	Q304	*D1	R332	C1	R529	C6
C4071	*M10	C4177	*K10	C4278	*J10	C4384	*F10	C4490	*D10	CL603	*B10	CL1337	*M10	CL2015	P7	CL3418	E4	D3501	L1	IC4	H10	IC4201	H12	L4113	*J11	Q305	*D1	R333	C1	R530	B6
C4072	*L10	C4178	*K10	C4279	*J10	C4385	*F10	C4501	*B11	CL604	*C10	CL1338	*M10	CL2016	P7	CL3419	E4	D3502	L1	IC5	G10	IC4202	H11	L4114	*K11	Q306	*D1	R334	*D2	R531	B6
C4073	*L10	C4179	*K10	C4280	*J10	C4401	*E12	C4502	*B10	CL605	*C10	CL1339	*M10	CL2017	P7	CL3420	E4	D3503	L1	IC6	E10	IC4301	F12	L4115	*K11	Q307	*C1	R335	*D2	R532	B6
C4074	*L10	C4180	*K10	C4281	*J10	C4402	*D12	C4503	B11	CL606	*B10	CL1340	*E10	CL2018	P7	CL3421	E4	D3504	L1	IC7	C10	IC4302	F11	L4116	*K11	Q308	*C1	R336	*D2	R533	B6
C4075	*L10	C4181	*K10	C4282	*H10	C4403	*D12	C4504	B10	CL607	*E10	CL1341	*E10	CL2019	M4	CL3422	E4	D3505	L1	IC8	N5	IC4401	E12	L4117	*J11	Q309	*C1	R337	*D2	R534	B6
C4076	*M10	C4182	*K10	C4283	*H10	C4404	D12	C4505	B11	CL608	*D10	CL1342	*E10	CL2020	M3	CL3423	E4	D3506	L1	IC9	J5	IC4402	D11	L4118	*K10	Q310	*C1	R338	*C1	R535	B6
C4077	*M10	C4183	*K10	C4284	*H10	C4405	D12	C4506	B10	CL609	*D10	CL1343	*E10	CL2021	M4	CL3424	E4	D3507	L1	IC10	E5	IC4403	D12	L4201	*H11	Q311	*C1	R339	C1	R536	B6
C4078	*M10	C4184	*K10	C4285	*H10	C4406	D12	C4507	B11	CL610	*D10	CL1344	*E10	CL2022	M4	CL3425	E4	D3508	L1	IC11	B5	IC4501	B11	L4202	*H11	Q312	*C1	R340	C1	R537	B6
C4079	*M10	C4185	*K10	C4301	*F12	C4407	D12	C4508	B10	CL611	*D10	CL1345	*E10	CL2023	M4	CL3426	C4	D3901	P12	IC12	N7	IC4502	B11	L4203	*J11	Q313	*C1	R341	*C2	R538	B6
C4080	*M10	C4186	*K10	C4302	*F11	C4408	D11	C4509	*B11	CL612	*D10	CL1346	*E10	CL2024	M4	CL3427	D4	D3902	P11	IC13	N4			L4204	*H11	Q314	*C1	R342	*C2	R539	A5
C4081	*M10	C4187	*K10	C4303	F12	C4409	D12	C4510	*B10	CL613	F6	CL1347	*E10	CL2025	M4	CL3428	C4	D3903	P11	IC14	N8	L401	*B7	L4205	*J11	Q401	B8	R343	*C2	R540	A5
C4082	*L10	C4188	*K10	C4304	F11	C4410	E12	C4511	*C11	CL614	F6	CL1348	*E10	CL2026	M4	CL3429	D4	D4001	N11	IC15	*N8	L402	K6	L4206	*H11	Q402	L5	R344	*C1	R541	A5
C4083	*L10	C4189	*K10	C4305	F12	C4411	D11	C4512	*C11	CL615	G6	CL1349	*E10	CL2027	M4	CL3430	D4	D4002	L11	IC16	N2	L2301	*N7	L4207	*J11			R345	C1	R542	*C4
C4084	*M10	C4190	*K10	C4306	F11	C4412	D12	C4513	*D11	CL616	F6	CL1350	*E10	CL2028	M4	CL3431	D4	D4101	L11	IC17	*N2	L2302	*N7	L4208	*H11	R201	B4	R346	C1	R543	*C4
C4085	*L10	C4201	*H12	C4307	F12	C4413	*D12	C4514	*C11	CL617	F6	CL1351	*E10	CL2029	M4	CL3501	E4	D4102	H12	IC18	J4	L2501	*N4	L4209	*H11	R202	B4	R401	A7	R544	*C4
C4101	*L12	C4202	*H11	C4308	F11	C4414	*D11	C4515	*C11	CL618	*G10	CL1352	*E10	CL2030	M4	CL3502	E4	D4103	J11	IC19	H4	L2502	*N4	L4210	*J11	R203	A12	R402	A7	R545	*C4
C4102	*H12	C4203	G12	C4309	*F12	C4415	*D12	C4516	*C11	CL619	*F10	CL1353	*L10	CL2031	M4	CL3503	E4	D4201	H12	IC20	G3	L2601	*P5	L4211	*H11	R204	A12	R403	B8	R546	*C4
C4103	*J11	C4204	G11	C4310	*F11	C4416	*E11	C4517	*D11	CL620	*F10	CL1354	*L10	CL2032	M4	CL3504	E4	D4202	H11	IC21	D3	L2602	*P5	L4212	*J11	R205	A12	R404	L5	R547	*C4
C4104	L12	C4205	G12	C4311	*G11	C4417	*E11	C4518	*C11	CL621	*F10	CL1355	*L10	CL2033	M4	CL3505	*D3	D4301	F12	IC22	F2	L2603	*P5	L4213	*H11	R206	B3	R405	B7	R548	*C4
C4105	G12	C4206	G11	C4312	*F11	C4418	*E11	C4519	*C11	CL622	*F10	CL1356	*L10	CL2034	M4	CL3506	*E3	D4302	F11	IC23	G2	L2604	*P6	L4214	*H11	R207	J3	R406	B7	R549	*C4
C4106	J11	C4207	H11	C4313	*G11	C4419	*D11	C4520	*C11	CL623	*F10	CL1357	*L10	CL2035	M4	CL3507	D3	D4401	E12	IC24	D2	L2605	*P5	L4215	*H11	R208	P3	R407	B7	R550	*C4
C4107	L12	C4208	H11	C4314	*F11	C4420	*E11	C4521	*C11	CL624	*J10	CL1358	*L10	CL2036	M4	CL3601	D3	D4402	D11	IC25	E2	L2606	*P6	L4216	*J11	R209	L3	R408	B7	R551	*C4
C4108	G12	C4209	*G11	C4315	*G11	C4421	*E11	C4522	*D11	CL625	*H10	CL1359	*L10	CL2201	M7	CL3602	*D2	D4403	D12	IC301	*D1	L2607	*P5	L4217	*H11	R210	*B3	R409	B8	R552	*C4
C4109	J11	C4210	*G11	C4316	*F11	C4422	*E11	C4523	*B11	CL626	*H10	CL1360	*L10	CL2202	M7	CL3603	*D2	D4501	B11	IC302	*D1	L2608	*N6	L4218	*H10	R211	*B3	R410	L5	R553	*C4
C4110	L12	C4211	*H11	C4317	*G11	C4423	*D11	C4524	*C11	CL627	*H10	CL1361	*L10	CL2203	M7	CL3604	*E2	D4502	B11	IC303	*D1	L2609	*P5	L4301	*G11	R212	*K2	R411	K5	R554	*C4
C4111	H12	C4212	*H11	C4318	*F11	C4424	*E11	C4525	*C11	CL628	*H10	CL1362	*L10	CL2204	M7	CL3605	*E2			IC304	*C1	L2610	*P5	L4302	*F11	R213	*K2	R412	L5	R555	*C4
C4112	J11	C4213	*J11	C4319	*G11	C4425	*E11	C4526	*C11	CL629	*H10	CL1363	*L10	CL2401	P4			DD201	B3	IC401	A7	L2611	*N5	L4303	*G11	R214	*R2	R413	L6	R556	*C4
C4113	*L12	C4214	*H11	C4320	*G11	C4426	*D11	C4527	*B11	CL630	K6	CL1364	*L10	CL2402	P3	CN1501	G1	DD202	J2	IC402	B7	L2612	*P6	L4304	*F11	R215	*R2	R414	L5	R557	*C4
C4114	*G12	C4215	*J11	C4321	*F11	C4427	*E11	C4528	*B10	CL631	K6	CL1365	*L10	CL2403	P4	CN1502	J1	DD203	P2	IC403	L5	L2613	*P5	L4305	*G11	R216	*M2	R415	B8	R601	G6
C4115	*J11	C4216	*H11	C4322	*G11	C4428	*D11	C4529	*D10	CL632	K6	CL1366	*D10	CL2404	P3	CN1503	K1	DD204	L2	IC404	C8	L2614	*P5	L4306	*F11	R217	*M2	R416	L5	R602	*C10
C4116	*K11	C4217	*J11	C4323	*F11	C4429	*E11	C4530	*C10	CL633	K6	CL1367	*D10	CL2901	H4	CN3101	N1	DD205	J2	IC405	C7	L2615	*P6	L4307	*G11	R218	*B3	R417	B7	R603	*D10
C4117	*K11	C4218	*H11	C4324	*G11	C4430	*E11	C4531	*C10	CL634	K6	CL1368	*D10	CL3001	G5	CN3501	N1	DD206	K2	IC501	A8	L2616	*P5	L4308	*F11	R219	*B3	R418	L6	R604	*F10
C4118	*L11	C4219	*H11	C4325	*F11	C4431	*E11	C4532	*C10	CL635	*K10	CL1369	*D10	CL3002	G4			DD207	B2	IC502	C6	L2617	*P6	L4309	*G11	R220	*K2	R419	B7	R605	*H10
C4119	*K11	C4220	*J11	C4326	*G11	C4432	*D11	C4533	*C10	CL636	*K10	CL1370	*D10	CL3003	G4	CNB1	B12			IC503	C6	L3301	*H3	L4310	*G11	R221	*K2	R420	B7	R606	*H5
C4120	*K11	C4221	*H11	C4327	*F11	C4433	*D10	C4534	*C10	CL637	*J10	CL1371	*D10	CL3004	G5	CNC1	C12	E301	A11	IC504	M1	L3302	*H2	L4311	*F11	R222	*R2	R421	K6	R607	*K10
C4121	*K11	C4222	*J11	C4328	*F10	C4434	*E10	C4535	*C10	CL638	*K10	CL1372	*D10	CL3005	G4	CND1	D12	E302	F12	IC505	M1	L3303	*F2	L4312	*G11	R223	*R2	R422	K6	R608	M5
C4122	*L11	C4223	*H11	C4329	*G10	C4435	*E10	C4536	*C10	CL639	*K10	CL1373	*D10	CL3006	G5	CNE1	E12	E303	M12	IC506	C6	L3304	*F3	L4313	*F11	R224	*M2	R423	B8	R609	*L10
C4123	*K11	C4224	*H11	C4330	*G10	C4436	*E10	C4537	*C10	CL640	*J10	CL1374	*D10	CL3007	G4	CNG1	G12	E304	A7	IC507	B6	L3305	*H3	L4314	*G11	R225	*M2	R424	B7	R610	*N10
C4124	*K11	C4225	*H11	C4331	*G10	C4437	*E10	C4538	*C10	CL641	R6	CL1375	*D10	CL3008	G4	CNK1	K12	E305	G8	IC508	*B4	L3701	*E3	L4315	*F11	R226	C3	R425	B7	R611	*C10
C4125	*K11	C4226	*J11	C4332	*G10	C4438	*E10	C4539	*C10	CL642	R6	CL1376	*D10	CL3009	G4	CNL1	L12	E306	M8	IC509	*B4	L3702	*E2	L4316	*G11	R227	J3	R426	L5	R612	*C10
C4126	*K11	C4227	*H11	C4333	*G10	C4439	*E10	C4540	*C10	CL643	R6	CL1377	*D10	CL3010	G4	CNN1	N12	E307	K5	IC601	M5	L3703	*C2	L4317	*F11	R228	P3	R427	L5	R613	*E10
C4127	*L11	C4228	*H10	C4334	*G10	C4440	*E10	C4541	*C10	CL644	P6	CL1378	*C10	CL3011	G4	CNP1	P12	E308	C4	IC701	B12	L3704	*C3	L4318	*F10	R229	L3	R428	L5	R614	*E10
C4128	*K11	C4229	*J10	C4335	*G10	C4441	*E10	C4542	*C10	CL645	P6	CL1379	*J10	CL3012	G3			E309	G1	IC702	B10	L3705	*E3	L4401	*E11	R230	H3	R429	B8	R615	*F6
C4129	*K11	C4230	*J10	C4336	*G10	C4442	*E10	C4543	*C10	CL646	*M10	CL1380	*J10	CL3013	G4	D201	B4	E310	M2	IC703	F9	L3901	*P11	L4402	*E11	R231	K3	R430	B7	R616	*G10
C4130	*K11	C4231	*H10	C4337	*G10	C4443	*E10	C4544	*C10	CL647	*L10	CL1381	*J10	CL3014	G4	D202	B12	E311	*F12	IC704	K9	L3902	*N11	L4403	*E11	R232	B2	R431	L5	R617	*G10
C4131	*K11	C4232	*H10	C4338	*G10	C4444	*E10	C4545	*C10	CL648	*L10	CL1382	*J10	CL3015	G3	D203	C1	E312	*L12	IC801	C12	L3903	*P11	L4404	*D11	R233	*J2	R432	L6	R618	*H10
C4132	*K11	C4233	*J10	C4339	*G10	C4445	*E10	C4546	*C10	CL649	*L10	CL1383	*J10	CL3016	G4	D301	D1	E313	*A9	IC802	B9	L3904	*N11	L4405	*E11	R234	*J2	R433	B8	R619	*J10
C4133	*J10	C4234	*H10	C4340	*G10	C4446	*E10	C4547	*C10	CL650	*L10	CL1384	*J10	CL3017	G4	D302	D1	E314	*J8	IC803	F8	L3905	*P11	L4406	*E11	R235	*L2	R434	B8	R620	*J6

R621	*K10	R1143	B5	R1412	C5	R2001	N6	R2138	*N4	R2609	*P5	R3514	P1	R4201	H12	RB802	*C12	RB2214	M7
R622	*K10	R1144	A5	R1413	C5	R2002	P6	R2139	*N4	R2610	*P6	R3515	*D3	R4202	H11	RB803	*C12	RB2215	M7
R623	*N5	R1145	A5	R1414	B7	R2003	P6	R2140	*N4	R2611	*N5	R3516	*E3	R4203	H12	RB804	*C12	RB2216	N8
R624	*M10	R1146	A5	R1415	B6	R2004	M5	R2141	*N4	R2612	*N5	R3517	D3	R4204	G12	RB805	*B12	RB2217	N8
R625	*M10	R1147	A5	R1416	B6	R2005	M5	R2142	*N4	R2701	*E1	R3518	*D3	R4205	H11	RB806	*C12	RB2401	N3
R626	*P10	R1148	A5	R1417	D5	R2006	M5	R2143	*N4	R2801	*J4	R3519	*D3	R4206	G11	RB807	*C12	RB2402	N3
R627	*P10	R1149	A5	R1418	D5	R2007	*P7	R2144	N4	R2802	*J4	R3520	*D3	R4207	G11	RB808	*C12	RB2403	N3
R628	M5	R1150	A5	R1419	D5	R2008	*P7	R2145	N4	R2803	*H4	R3521	D3	R4208	G12	RB809	C12	RB2404	N3
R901	*C12	R1151	A5	R1420	D5	R2009	*P7	R2146	N4	R2804	*H4	R3522	*D3	R4209	*H12	RB810	C12	RB2405	*N3
R902	C12	R1152	A5	R1421	D5	R2010	P6	R2147	N4	R2805	J4	R3523	*D3	R4210	*H11	RB811	C12	RB2406	*N3
R903	B9	R1153	A5	R1422	D5	R2011	P6	R2148	N4	R2806	J4	R3524	D3	R4211	*H11	RB812	B12	RB2407	*N3
R904	F8	R1154	A5	R1423	D5	R2012	P6	R2149	P4	R2807	H4	R3601	*D2	R4212	*H11	RB813	*B9	RB2408	*N3
R905	L9	R1155	A5	R1424	D5	R2013	*N6	R2150	P4	R2808	J4	R3602	*E2	R4213	*H10	RB814	*F8	RB2409	N3
R906	B9	R1156	A5	R1425	D5	R2014	P7	R2151	P4	R2901	H5	R3603	*D2	R4214	*H10	RB815	*K8	RB2410	*P3
R907	B9	R1157	A5	R1426	D5	R2015	P6	R2152	N4	R2902	H5	R3604	*E2	R4215	*H10	RB816	*B9	RB2411	N3
R908	B9	R1158	A6	R1427	D5	R2016	P6	R2201	N8	R2903	H4	R3605	D3	R4216	*H10	RB817	*F8	RB2412	*N3
R909	*B9	R1159	A6	R1428	D5	R2017	*P7	R2202	N8	R2904	H4	R3606	D3	R4301	F12	RB818	*K8	RB2413	*P3
R910	*B9	R1160	A6	R1429	*M10	R2018	*P7	R2203	N8	R2905	*J5	R3607	D3	R4302	F11	RB819	*B9	RB2414	P3
R911	*B9	R1161	A6	R1430	*M10	R2019	*P7	R2204	*N7	R2906	*J5	R3608	D3	R4303	F12	RB820	*F9	RB2415	P3
R912	F8	R1162	A5	R1431	*C10	R2020	M7	R2205	*N7	R2907	H5	R3609	*D3	R4304	F12	RB821	*K8	RB2416	P3
R913	F8	R1163	B5	R1432	*C10	R2021	*M7	R2206	N8	R2908	H5	R3610	*D3	R4305	F11	RB822	*B9	RB2417	N3
R914	F8	R1164	A5	R1433	*G10	R2022	*M7	R2207	N8	R2909	*J5	R3611	E3	R4306	F11	RB823	*F9	RB2701	*E1
R915	F8	R1165	B5	R1434	*G10	R2023	*M7	R2208	N8	R2910	*J5	R3612	E3	R4307	F11	RB824	*K8	RB2702	*E1
R916	*F8	R1166	A6	R1435	B6	R2024	*M7	R2209	N8	R2911	*H5	R3613	*D2	R4308	F12	RB825	B9	RB2703	*F1
R917	*F8	R1167	A6	R1436	B6	R2025	*N7	R2210	N8	R2912	*H5	R3614	*E3	R4309	*F12	RB826	B9	RB2704	*F1
R918	*F8	R1168	A6	R1437	B6	R2026	M7	R2211	N8	R3001	*G3	R3615	D2	R4310	*F11	RB827	B9	RB2705	*F1
R919	*F8	R1169	A6	R1438	B6	R2027	*M7	R2212	*N8	R3002	F5	R3616	E2	R4311	*G11	RB828	B9	RB3101	*K1
R920	L9	R1170	*A7	R1439	B6	R2028	*M7	R2213	N8	R3101	F5	R3701	*E3	R4312	*G11	RB829	F8	RB3102	*K1
R921	L9	R1171	*A6	R1440	B6	R2029	*P7	R2214	*N8	R3102	F5	R3702	*E2	R4313	*F10	RB830	F8	RB3501	*L1
R922	L9	R1172	*A7	R1441	B6	R2030	*P7	R2215	N8	R3103	*F3	R3703	*C2	R4314	*F10	RB831	F9	RB3502	*L1
R923	*L9	R1173	*A6	R1501	*J1	R2031	*N4	R2216	*N8	R3104	*F3	R3704	*C3	R4315	*G10	RB832	F9		
R924	*L9	R1174	*A7	R1502	*J1	R2032	*N4	R2217	N8	R3105	*F3	R3705	*E3	R4316	*G10	RB833	K8	S501	M1
R925	*L9	R1175	*A6	R1503	*J1	R2033	*N4	R2218	*N8	R3106	*F3	R3801	G6	R4401	E12	RB834	K8		
R926	A4	R1176	*A7	R1504	*G1	R2034	M4	R2219	N8	R3107	E2	R3901	R11	R4402	D12	RB835	K8	SORI01	A8
R927	A4	R1177	*A6	R1505	*J1	R2035	M4	R2220	*N8	R3108	*F3	R3902	R10	R4403	D12	RB836	K8	SORI02	R8
R928	A4	R1178	*A7	R1506	*G1	R2036	M4	R2221	N8	R3109	*F3	R3903	R11	R4404	E12	RB901	*C12		
R929	A4	R1179	*A6	R1507	*J1	R2037	*N4	R2222	*N8	R3110	*F3	R3904	R12	R4405	D12	RB902	*C12	TP201	B4
R930	A4	R1180	*A7	R1508	*G1	R2038	M4	R2223	N8	R3111	*F3	R3905	R12	R4406	D11	RB903	B9	TP202	A12
R1001	*C10	R1181	*A6	R1509	*J1	R2039	M4	R2224	*N8	R3112	E2	R3906	R11	R4407	D11	RB904	F8	TP203	C2
R1002	G6	R1182	A7	R1510	*G1	R2040	M4	R2225	N8	R3113	N1	R3907	R11	R4408	D11	RB905	L9	TP204	J3
R1003	*D10	R1183	A7	R1511	*J1	R2041	*N4	R2226	*N8	R3114	F2	R3908	R11	R4409	D12	RB1401	C5	TP205	P3
R1004	*F10	R1184	B4	R1512	*G1	R2042	*N4	R2227	N8	R3115	F2	R3909	R11	R4410	D12	RB1402	C5	TP206	L3
R1005	*H10	R1201	B5	R1513	*J1	R2043	*N4	R2228	*N8	R3116	*G3	R3910	R11	R4411	D12	RB1403	C5	TP207	H3
R1006	*H6	R1202	B5	R1514	*K1	R2044	P4	R2229	N8	R3117	*H3	R3911	R11	R4412	D12	RB1404	C5	TP208	K3
R1007	*K10	R1203	B5	R1515	*J1	R2045	*P4	R2230	*N8	R3118	N1	R3912	R12	R4413	*E12	RB1405	C5	TP209	C1
R1008	M5	R1204	B5	R1516	*K1	R2046	*P3	R2231	N8	R3119	*F3	R3913	*P12	R4414	*D11	RB1406	C5	TP501	L1
R1009	*L10	R1205	B5	R1517	*K1	R2047	*P4	R2232	*N8	R3120	*G3	R3914	*P11	R4415	*D12	RB1407	C5	TP502	C6
R1010	*N10	R1206	B5	R1518	*J1	R2048	*P4	R2233	N8	R3121	F3	R3915	*P11	R4416	*E11	RB1501	*G1	TP503	B6
R1011	M5	R1207	B5	R1519	*K1	R2049	*P4	R2234	*N8	R3122	F4	R3916	*P11	R4417	*E11	RB1502	*G1	TP2601	*P5
R1101	*B5	R1208	B5	R1520	*K1	R2050	P4	R2401	N3	R3123	*F3	R3917	*P11	R4418	*E10	RB1503	*G1	TP2602	*P6
R1102	*B5	R1209	B5	R1521	*K1	R2051	*P4	R2402	N3	R3124	*F3	R3918	*N10	R4419	*E10	RB1504	*G1	TP2701	E1
R1103	*A5	R1210	B5	R1522	*F3	R2052	*P4	R2403	N3	R3125	*F3	R3919	*N10	R4420	*E10	RB1505	*G1	TP3901	*P12
R1104	*A5	R1211	B5	R1523	F3	R2053	*N4	R2404	*N3	R3126	F3	R3920	*P10	R4421	*E10	RB1506	*G1	TP3902	*P11
R1105	*A5	R1212	B5	R1524	*C6	R2054	*N4	R2405	*P3	R3127	*F3	R3921	*P10	R4501	B11	RB1507	*G1	TP3903	*P11
R1106	*A5	R1213	A5	R1525	C6	R2101	*N6	R2406	P3	R3128	*F3	R4001	N11	R4502	B10	RB2101	N6	TP4001	*N11
R1107	*A5	R1214	A5	R1526	*J10	R2102	N6	R2407	N3	R3201	*F2	R4002	L11	R4503	B11	RB2102	N6	TP4002	*L11
R1108	*A5	R1215	B5	R1527	L6	R2103	N6	R2408	N3	R3202	*G2	R4003	N11	R4504	B11	RB2103	N6	TP4101	*L11
R1109	B5	R1216	B5	R1528	D3	R2104	N6	R2409	N3	R3203	*F2	R4004	N11	R4505	B10	RB2104	N6	TP4102	*H12
R1110	B5	R1217	*A5	R1529	C4	R2105	N6	R2410	N3	R3204	*G2	R4005	L11	R4506	B10	RB2105	M7	TP4103	*J11
R1111	*A4	R1218	*A5	R1530	C4	R2106	*N6	R2411	N2	R3205	F3	R4006	L11	R4507	B10	RB2106	M7	TP4201	*H12
R1112	*A4	R1219	B5	R1531	*D10	R2107	*N6	R2412	*N2	R3206	F3	R4007	L11	R4508	B11	RB2107	M6	TP4202	*H11
R1113	*A4	R1220	B5	R1532	*L10	R2108	*N6	R2413	N2	R3207	G3	R4008	N11	R4509	*B11	RB2108	N6	TP4301	*F12
R1114	*A4	R1221	B5	R1533	*H5	R2109	*N6	R2414	*N2	R3208	G3	R4009	*N11	R4510	*B11	RB2109	N6	TP4302	*F11
R1115	*A4	R1222	F1	R1534	*F10	R2110	*N6	R2415	N2	R3209	*G3	R4010	*L11	R4511	*C11	RB2110	M7	TP4401	*E12
R1116	*A4	R1223	F1	R1535	*N10	R2111	*N6	R2416	*P2	R3210	*G3	R4011	*M11	R4512	*C11	RB2111	M7	TP4402	*D11
R1117	B5	R1224	B4	R1536	*C6	R2112	*N6	R2417	N2	R3211	G3	R4012	*M11	R4513	*C10	RB2112	M7	TP4403	*D12
R1118	A1	R1225	*A4	R1537	*E5	R2113	*N6	R2418	*N2	R3212	G3	R4013	*M10	R4514	*C10	RB2113	N5	TP4501	*B11
R1119	A1	R1226	*A4	R1538	*C6	R2114	*P6	R2419	N3	R3213	*G2	R4014	*M10	R4515	*C10	RB2114	N5	TP4502	*B11
R1120	A1	R1227	*A4	R1539	*G10	R2115	*N6	R2420	*P3	R3214	*G3	R4015	*M10	R4516	*C10	RB2115	N5		
R1121	A1	R1228	*A4	R1540	*P10	R2116	*P7	R2421	N3	R3215	G2	R4016	*M10			RB2116	N5	X3101	E2
R1122	B1	R1229	B5	R1541	*H5	R2117	*P7	R2422	*P3	R3216	G2	R4101	L12	RB701	*B12	RB2117	P4	X501	D7
R1123	B1	R1230	B5	R1601	*N10	R2118	N6	R2423	N3	R3301	*H3	R4102	H12	RB702	*B12	RB2118	P4	X502	B5
R1124	B1	R1231	B4	R1602	*M10	R2119	N6	R2424	*P3	R3302	*H2	R4103	J11	RB703	*B12	RB2119	P4		
R1125	B1	R1301	P10	R1603	P5	R2120	N6	R2425	N2	R3303	*F2	R4104	L12	RB704	*B12	RB2120	P4		
R1126	A5	R1302	G10	R1604	P5	R2121	P6	R2426	*P2	R3304	*F3	R4105	L12	RB709	B12	RB2121	P4		
R1127	A5	R1303	M10	R1605	P5	R2122	P6	R2427	N2	R3305	*H3	R4106	H12	RB710	B12	RB2122	P4		
R1128	A5	R1304	E10	R1606	P5	R2123	M6	R2428	*N2	R3401	*E3	R4107	G12	RB711	B12	RB2123	P4		
R1129	A5	R1305	L10	R1607	P5	R2124	M6	R2429	N3	R3402	E5	R4108	G12	RB712	B12	RB2124	P4		
R1130	A5	R1306	D10	R1608	P5	R2125	N6	R2430	*N3	R3501	E5	R4109	J11	RB713	B10	RB2201	P8		
R1131	A5	R1307	J10	R1609	P5	R2126	M7	R2431	N3	R3502	E5	R4110	J11	RB714	B10	RB2202	N8		
R1132	A5	R1401	C5	R1610	P5	R2127	*N5	R2432	*N3	R3503	*D3	R4111	J11	RB715	B10	RB2203	N8		
R1133	A5	R1402	C5	R1611	P5	R2128	N5	R2433	N3	R3504	*D3	R4112	L12	RB716	B10	RB2204	N8		
R1134	A5	R1403	C5	R1612	P5	R2129	N5	R2434	*N3	R3505	*D3	R4113	*L12	RB717	F9	RB2205	*N7		
R1135	A5	R1404	C5	R1613	P5	R2130	N5	R2601	P5	R3506	*D3	R4114	*H12	RB718	F9	RB2206	*N7		
R1136	A5	R1405	C5	R1614	P5	R2131	N5	R2602	P6	R3507	*D3	R4115	*J11	RB719	F9	RB2207	*N7		
R1137	A5	R1406	C5	R1615	P6	R2132	*N5	R2603	P5	R3508	*D3	R4116	*K11	RB720	F9	RB2208	*P7		
R1138	A5	R1407	C5	R1616	P6	R2133	*N5	R2604	P5	R3509	*D3	R4117	*K11	RB721	K9	RB2209	N8		
R1139	A5	R1408	C5	R1617	P6	R2134	*N5	R2605	P6	R3510	*D3	R4118	*K10	RB722	K9	RB2210	*N8		
R1140	A5	R1409	C5	R1618	P6	R2135	*N5	R2606	P6	R3511	P1	R4119	*K10	RB723	K9	RB2211	N8		
R1141	A5	R1410	C5	R1701	*K10	R2136	*N5	R2607	R6	R3512	*E3	R4120	*K10	RB724	K9	RB2212	*N8		
R1142	B5	R1411	C5	R1702	*H10	R2137	*N5	R2608	R5	R3513	*E3	R4121	*K10	RB801	*B12	RB2213	*N7		

SG-272A (1-681-842-22)
---
*:B SIDE

C100	A2	CL105	*B1	R133	A2
C101	A2	CL106	*B1	R134	A2
C102	A2	CL107	*A1	R200	*B1
C103	A2	CL108	*A1	R201	*A1
C104	A2	CL109	*A1	R202	*B1
C105	A2	CL110	*A1	R203	*B1
C106	A2	CL111	*A1	R204	*B1
C107	A2	CL200	*B2	R205	*B1
C109	A2	CL300	B1	R206	B2
C110	A2	CL301	B1	R207	B2
C111	A2	CL302	B1	R208	B2
C112	*A2	CL303	B1	R209	B2
C113	A2			R210	B1
C114	*A1	CN1	A1	R211	B1
C115	*A2	CN2	B2	R212	*A2
C116	*A2	CN3	B1	R213	B2
C117	A2			R214	B2
C200	A2	D100	B1	R215	B1
C201	B2	D101	B1	R216	*B2
C202	B2	D102	A2	R217	*B2
C203	B2	D200	B1	R218	*B2
C204	B2	D300	A1	R219	*A2
C205	B2	D301	A1	R220	*B2
C206	*B2	D302	A1	R221	*B2
C207	B2	D303	A1	R222	*B2
C208	B2			R223	*B2
C209	B1	E1	A2	R224	*B2
C210	*A2	E2	B1	R225	*B2
C211	*A2			R226	A2
C212	*A2	F300	A1	R227	*A2
C213	A2			R228	B2
C214	B2	IC100	A2	R229	*B2
C215	B2	IC101	A2	R230	*B2
C216	B1	IC103	A2	R231	*B1
C217	B1	IC106	A2	R232	B2
C218	B1	IC113	B1	R233	B1
C219	B1	IC115	A1	R234	B1
C220	B1	IC200	B2	R235	B1
C221	B1	IC201	B2	R236	*B2
C222	B2	IC204	A2	R237	*B2
C223	B2	IC206	B2	R238	*B2
C224	*A2	IC207	B2	R239	*B1
C225	B2	IC208	B2	R240	*B2
C226	B1	IC300	A1	R243	*B2
C227	A2	IC302	B1	R244	*B1
C228	B2	IC303	A1	R245	*B1
C229	*B2	IC305	B1	R246	*B1
C230	*B2	IC306	A1	R300	*B1
C231	*B2			R301	*A1
C232	*B2	L101	A2	R302	*A1
C233	B1	L102	A2	R303	*B1
C234	B1	L103	A2	R304	*A1
C235	B2	L200	B2	R305	*A1
C300	A1	L201	B2	R306	*B1
C302	*B1	L202	A2	R307	*B1
C303	*A1	L206	B2	R308	*A1
C304	*A1	L300	A1	R309	*A1
C305	A1			R312	*A1
C306	*B1	Q100	A2		
C307	*A1	Q201	*B1	RB200	B2
C308	*B1	Q202	*B1	RB201	B2
C309	A1	Q203	*B1	RB202	B2
C311	*A1			RB300	B1
C312	*B1	R100	A2	RB302	B1
C313	*A1	R101	A2		
C315	B1	R102	A2	X200	B1
C316	B1	R103	A2	X201	B1
C317	*B1	R104	A2	X202	B1
C318	*A1	R105	A2		
C319	*A1	R106	A2		
C320	*A1	R111	A2		
C321	*A1	R112	A2		
C322	*B1	R113	A2		
C323	*B1	R114	A1		
C324	*B1	R115	A2		
C325	*A1	R116	A2		
C326	*A1	R117	A2		
C327	*A1	R118	*A2		
C328	*B1	R119	*B1		
C329	*B1	R120	*B1		
C330	*B1	R121	*B1		
C331	*B1	R123	A2		
C332	*B1	R124	A2		
C333	A1	R125	A2		
C334	A1	R126	A2		
		R127	A2		
CL100	*A1	R128	A2		
CL101	*A1	R129	A2		
CL102	*A1	R130	A2		
CL103	*A1	R131	A2		
CL104	*A1	R132	A2		

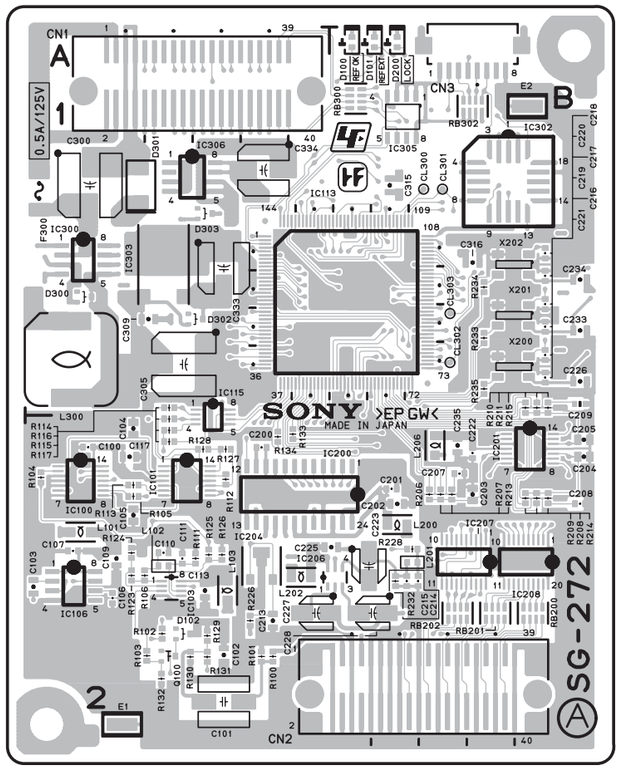

SG-272A -A SIDE-
SUFFIX: -22

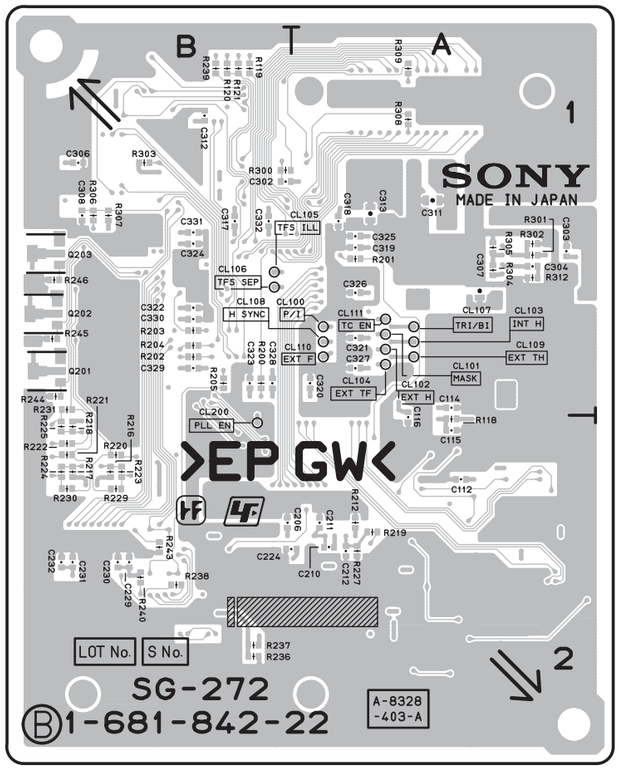

SG-272A -B SIDE-
SUFFIX: -22

SIO-26A (1-862-225-11)
---
*:B SIDE

C100	*D5	R301	*A3
C101	D4	R302	*D2
C102	D4	R400	E2
C103	*E3	R401	*C2
C104	D3	R402	*C2
C105	C3	R403	*E2
C106	C3	R404	*B4
C400	E2	R405	*B4
C401	B4	R406	*B4
C402	B4	R415	*C2
C403	B4	R416	*C2
C404	A4	R417	*C2
C405	*F3	R418	E4
C406	*F3	R419	E4
C407	*F3	R420	E4
C408	*F1	R421	*C2
C409	G3	R422	*E2
C410	*D3	R423	E1
C411	*C2	R424	E1
C413	*D3	R425	D1
C414	*D2	R426	D1
C415	*D2	R427	*G1
C416	*D2	R428	*G1
C417	*D2	R429	*B2
C418	*D2	R430	*B2
C423	D3	R500	*A3
C424	*C1	R501	*B2
C425	*E1	R502	G3
C426	*E3	R503	*B1
C500	*B2	R504	G4
C501	*B2		
C502	*A3	RB100	D3
C503	*B3	RB101	D3
C504	*B1	RB102	D3
C505	*A3	RB103	C3
C506	*B1	RB104	C3
C507	*B1	RB105	C3
C508	G4	RB106	C3
C509	G4	RB200	*A3
C510	*B2	RB400	*F4
C511	G3	RB401	F4
C512	*B1	RB402	E4
C513	G4	RB403	*E3
C514	*B1	RB500	*G2
C515	G3		
C516	*F2	S300	A3
		S500	A2
CL201	C2		
CL202	C3	TP100	D4
CL400	C3	TP400	B4
		TP401	A4
CN100	*C4		
CN400	E4	X400	E2
CN500	A2		
CN501	A1		
CN502	F4		
CN503	G4		
D200	A4		
D201	A3		
D202	A3		
E402	F4		
E403	F1		
E404	C4		
IC100	*D3		
IC101	*D3		
IC102	*C3		
IC103	*C3		
IC104	*C4		
IC200	D2		
IC401	B4		
IC402	F3		
IC410	F1		
IC411	G3		
IC500	B3		
IC501	B1		
IC502	*A3		
IC503	*B1		
IC504	G4		
IC505	F2		
R100	D4		
R102	E4		
R103	C4		
R200	*A3		
R201	*A3		
R202	*C2		
R203	*C1		
R300	*A3		

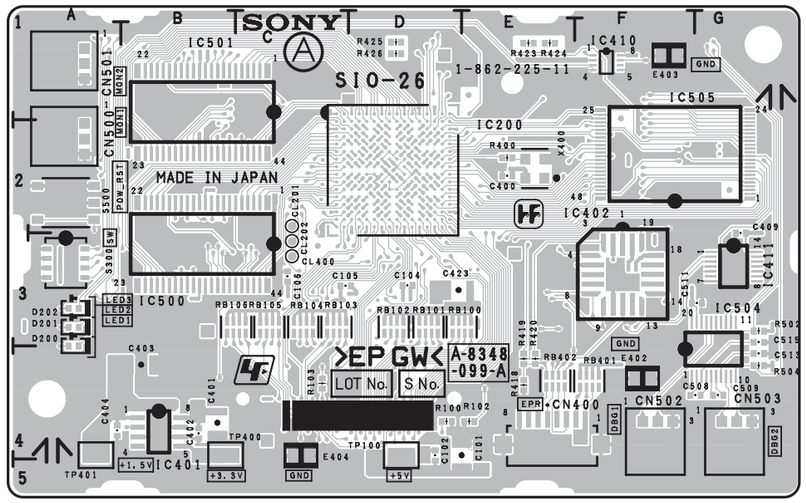

SIO-26A -A SIDE-
SUFFIX: -11

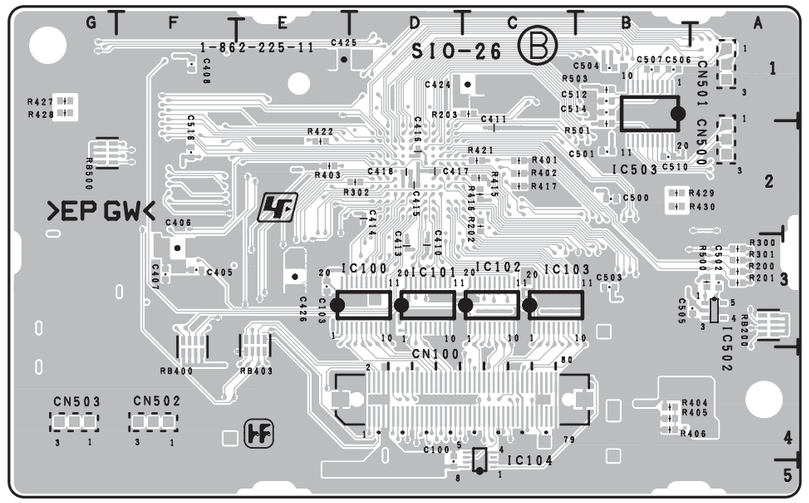

SIO-26A -B SIDE-
SUFFIX: -11

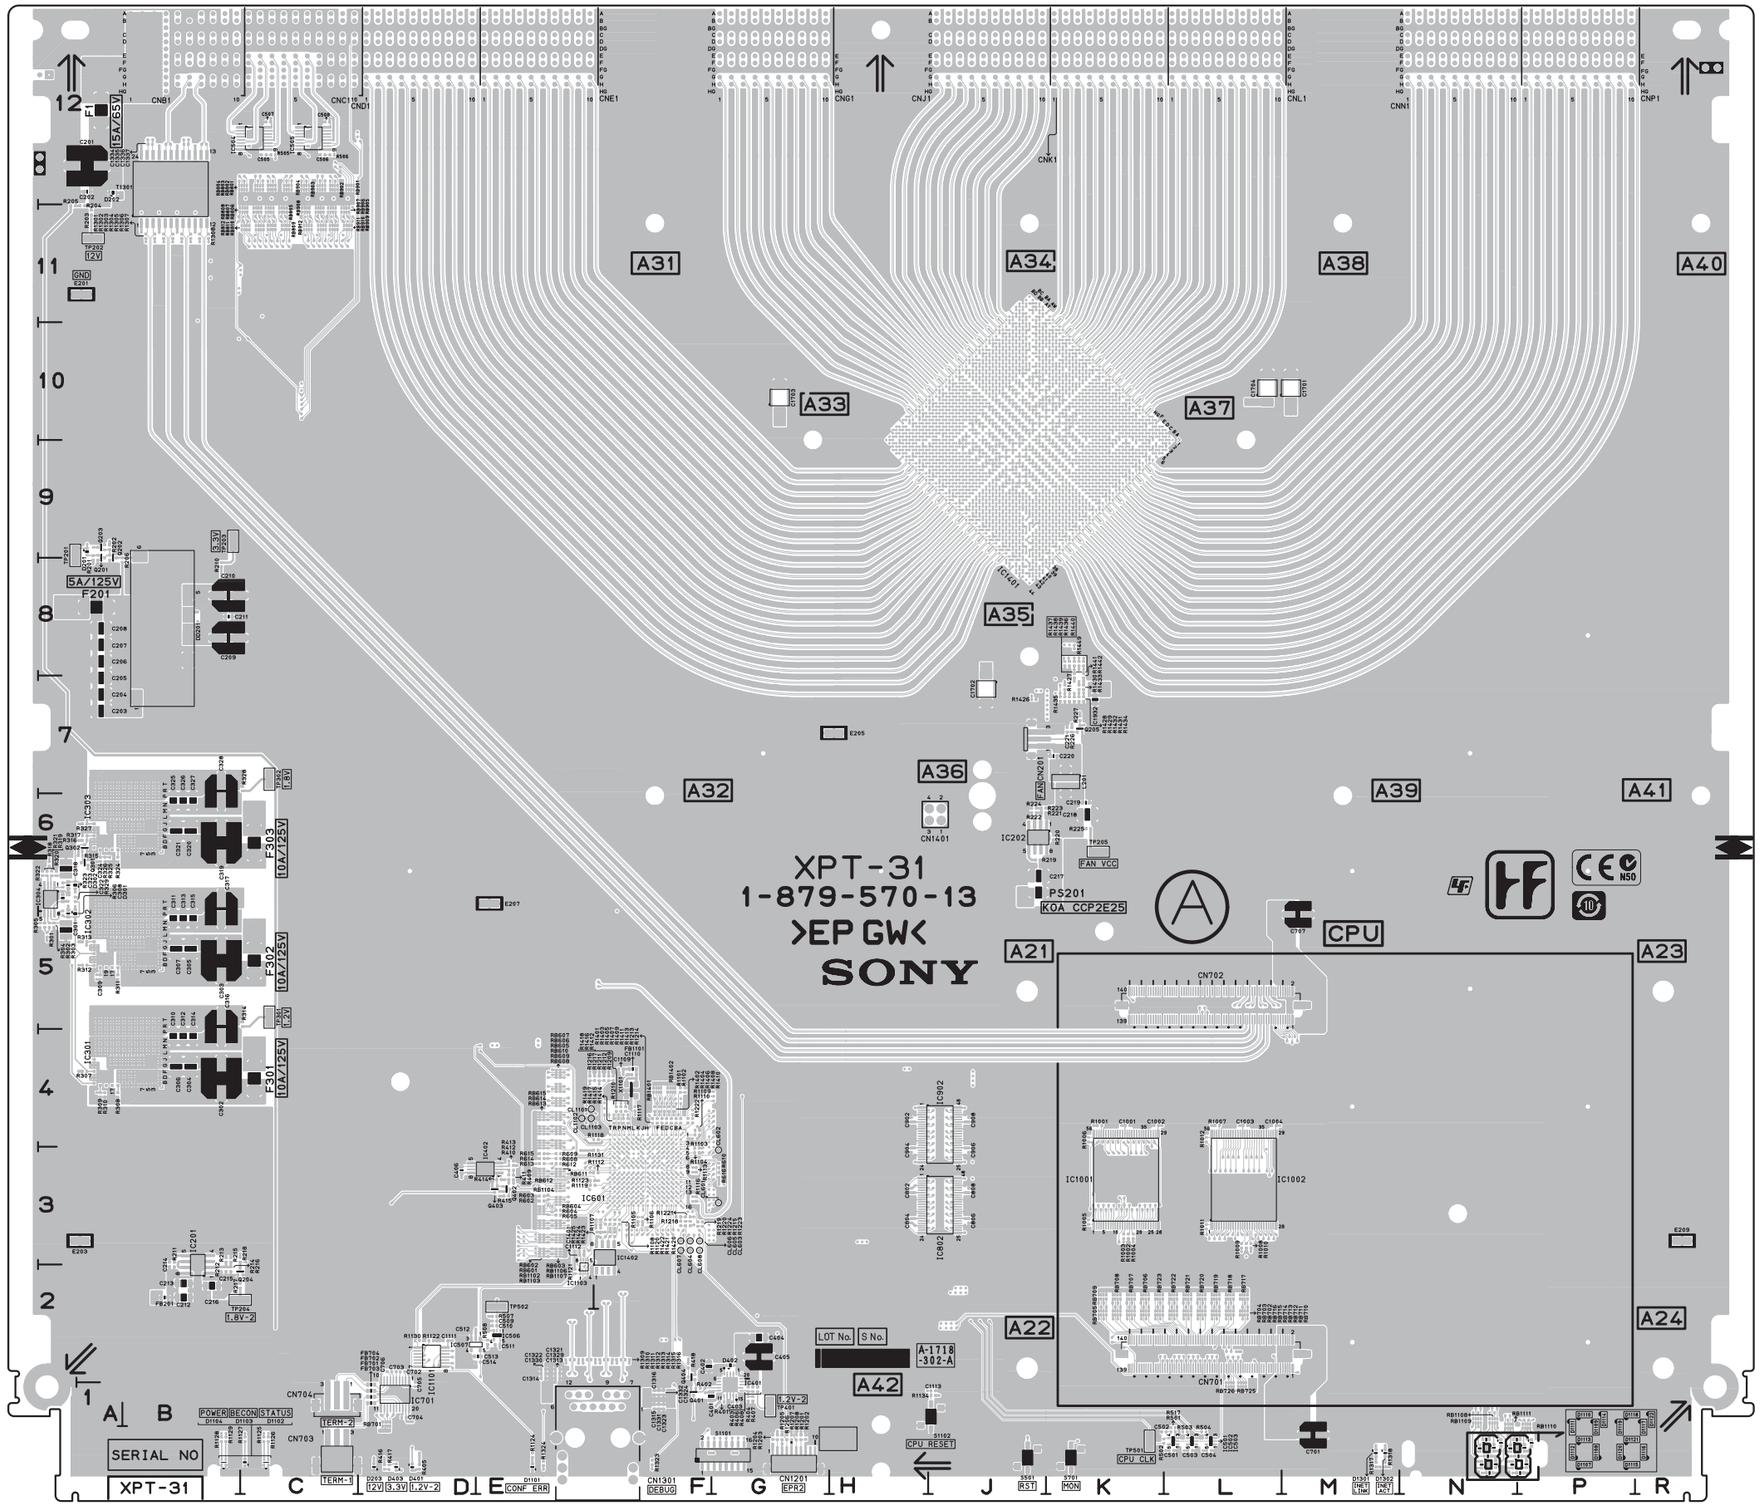

XPT-31/31A -A SIDE-
SUFFIX: -13

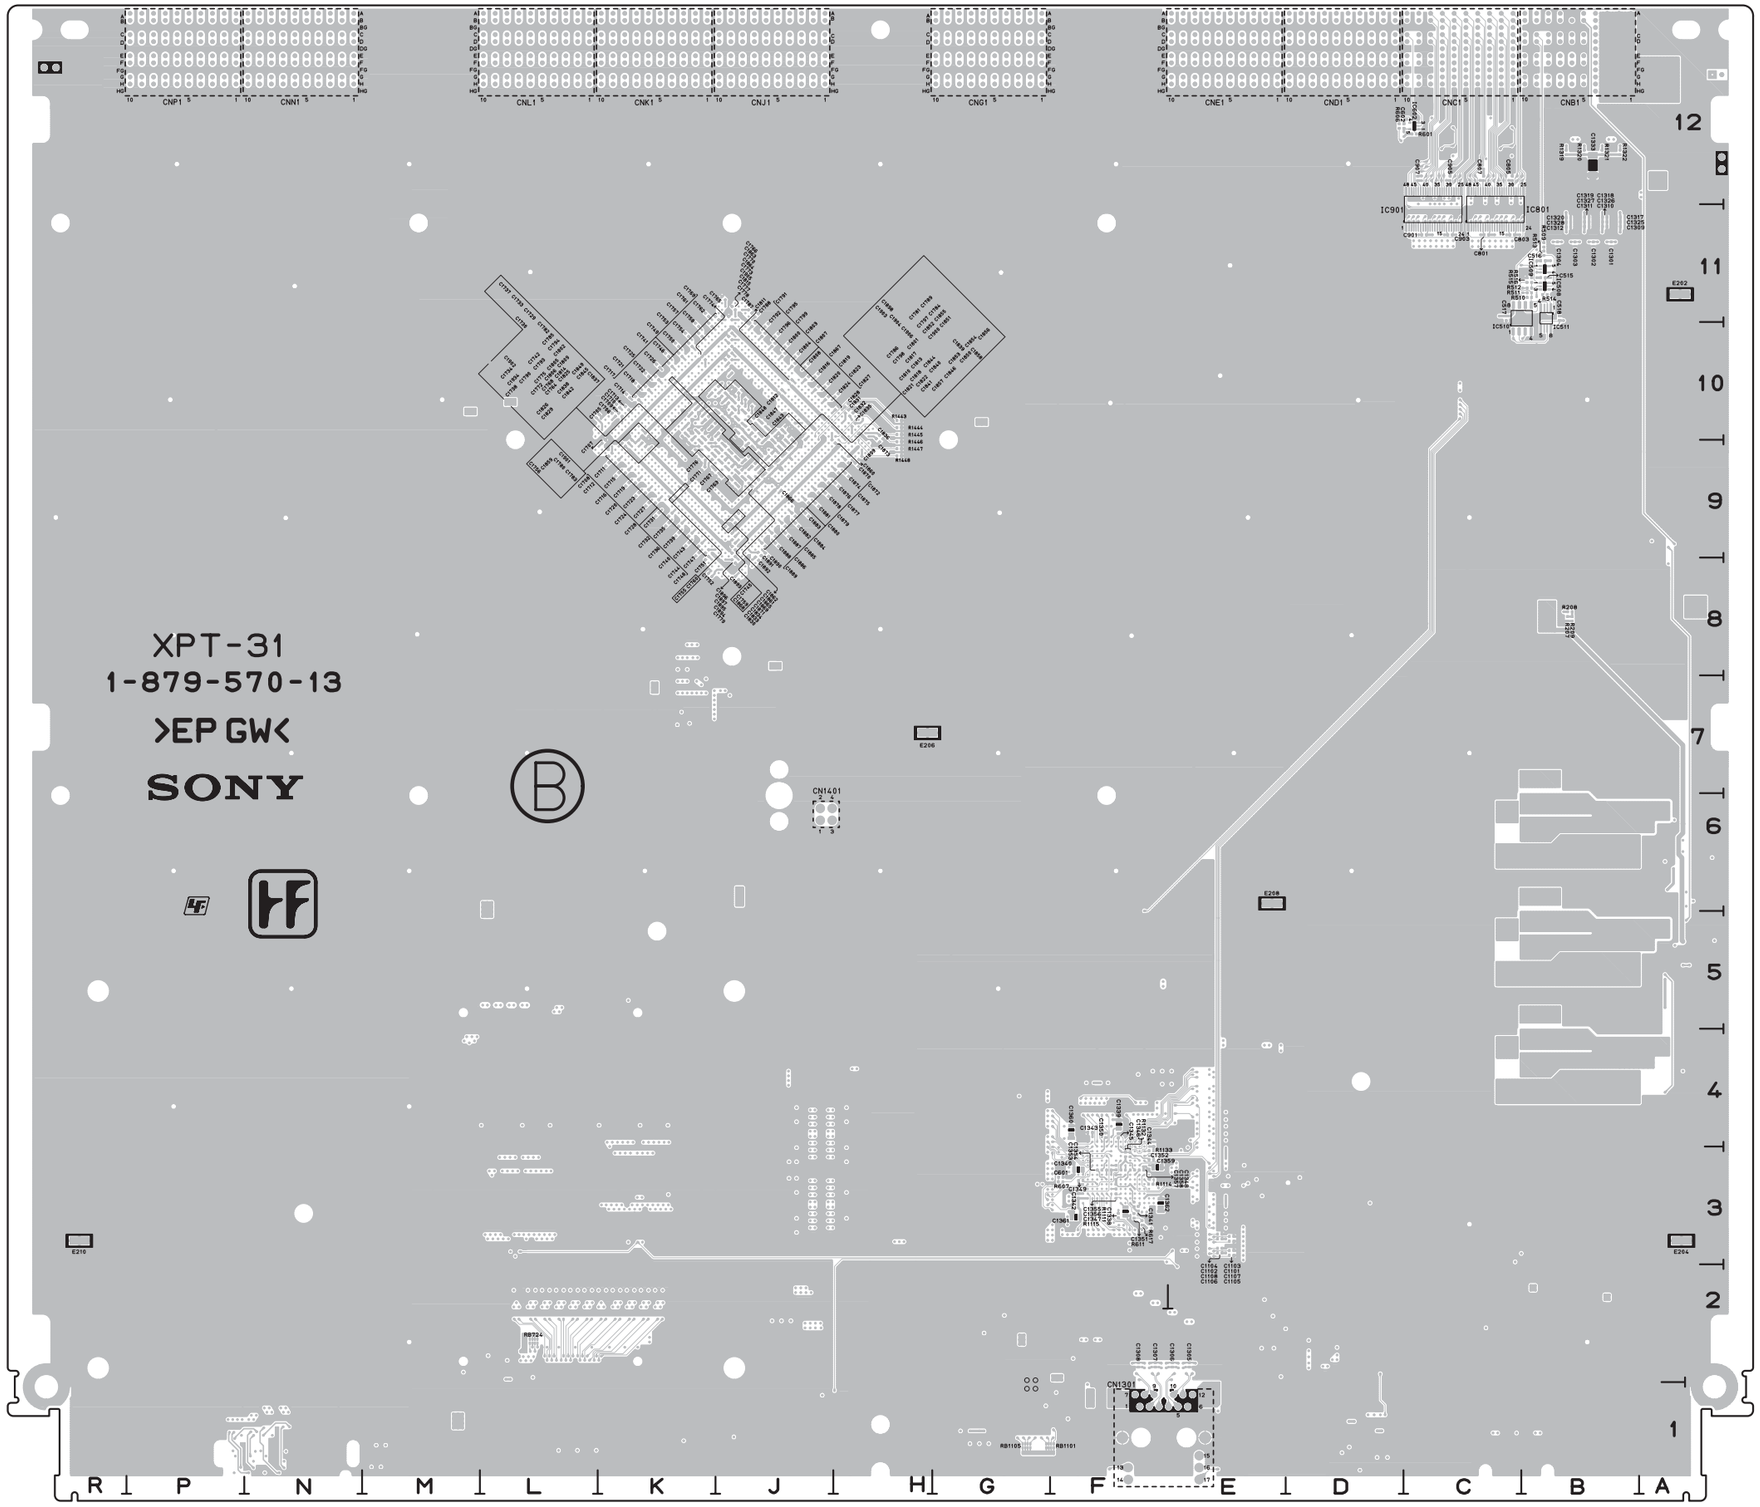

XPT-31/31A -B SIDE-
SUFFIX: -13

XPT-31/31A (1-879-570-13)

*:B SIDE

C201	A12	C902	H4	C1705	*K10	C1796	*J10	C1887	*J9	E204	*A3	R222	J6	R1005	K3	R1402	F4	RB802	C12
C202	A12	C903	*C11	C1706	*K10	C1797	*J10	C1888	*J9	E205	H7	R223	J6	R1006	K4	R1403	F4	RB803	C12
C203	A7	C904	H3	C1707	*K9	C1798	*J10	C1889	*J9	E206	*H7	R224	J6	R1007	L4	R1404	F4	RB804	C12
C204	A7	C905	*C12	C1708	*K9	C1799	*J10	C1890	*J9	E207	E6	R225	K6	R1008	L3	R1405	F4	RB805	C11
C205	A7	C906	J3	C1709	*K10	C1800	*J10	C1891	*J9	E208	*E6	R226	K7	R1009	L3	R1406	F4	RB806	C11
C206	A8	C907	*C12	C1710	*K10	C1801	*J10	C1892	*J8	E209	R3	R227	K7	R1010	L3	R1407	F4	RB807	C11
C207	A8	C908	J4	C1711	*K9	C1802	*J10	C1893	*J8	E210	*R3	R301	A5	R1011	L3	R1408	F4	RB808	C11
C208	A8	C1001	K4	C1712	*K9	C1803	*J10	C1894	*J9			R302	A5	R1012	L4	R1409	F4	RB809	C11
C209	B8	C1002	K4	C1713	*K10	C1804	*J10	C1895	*J9	F1	A12	R303	A5	R1101	F4	R1410	F4	RB810	C11
C210	B8	C1003	L4	C1714	*K10	C1805	*J9	C1896	*J9	F201	A8	R304	A5	R1102	F4	R1411	F4	RB811	C11
C211	B8	C1004	L4	C1715	*K9	C1806	*J9	C1897	*J9	F301	C4	R305	A5	R1103	F3	R1412	F4	RB812	C11
C212	B2	C1101	*E3	C1716	*K9	C1807	*J10	C1898	*J10	F302	C5	R306	A5	R1104	F3	R1413	F4	RB901	C12
C213	B2	C1102	*E3	C1717	*K10	C1808	*J10	C1899	*H9	F303	C6	R307	A4	R1105	F3	R1414	F4	RB902	C12
C214	B2	C1103	*E3	C1718	*K10	C1809	*J9	C1900	*J10			R308	A4	R1106	F3	R1415	F4	RB903	C12
C215	B2	C1104	*E3	C1719	*K9	C1810	*J10	C1901	*K10	FB201	B2	R309	A4	R1107	F3	R1416	F4	RB904	C12
C216	B2	C1105	*E3	C1720	*K9	C1811	*J10	C1902	*K10	FB701	D1	R310	A4	R1108	F3	R1417	F4	RB905	C11
C217	J6	C1106	*E3	C1721	*K10	C1812	*J10	C1903	*K10	FB702	D1	R311	A5	R1109	F4	R1418	F4	RB906	C11
C218	K6	C1107	*E3	C1722	*K10	C1813	*J10	C1904	*J10	FB703	D1	R312	A5	R1110	F4	R1419	F4	RB907	C11
C219	K6	C1108	*E3	C1723	*K9	C1814	*J9	C1905	*J10	FB704	D1	R313	A5	R1111	*F3	R1420	F3	RB908	C11
C220	K7	C1109	F4	C1724	*K9	C1815	*J10	C1906	*J10	FB1101	F4	R314	C5	R1112	F3	R1421	F3	RB909	C11
C221	K7	C1110	F4	C1725	*K10	C1816	*J10	C1932	K7			R315	A6	R1113	F3	R1422	F3	RB910	C11
C301	A5	C1111	D2	C1726	*K10	C1817	*J10	C1934	*K9	IC201	B2	R316	A6	R1114	*F3	R1423	F3	RB911	C11
C302	B4	C1112	E3	C1727	*K9	C1818	*J10			IC202	J6	R317	A6	R1115	*F3	R1424	F3	RB912	C11
C303	B5	C1113	J1	C1728	*K9	C1819	*J10	CL601	G3	IC301	B4	R318	A6	R1116	F3	R1425	F3	RB1101	*F1
C304	B4	C1301	*B11	C1729	*K10	C1820	*J10	CL602	G3	IC302	B5	R319	A6	R1117	F4	R1426	J7	RB1102	E3
C305	B5	C1302	*B11	C1730	*K10	C1821	*J9	CL603	F3	IC303	B6	R320	A6	R1118	F4	R1427	K7	RB1103	E3
C306	B4	C1303	*B11	C1731	*K9	C1822	*J9	CL604	F3	IC304	A6	R321	A6	R1119	E3	R1428	K7	RB1104	E3
C307	B5	C1304	*B11	C1732	*K9	C1823	*J10	CL605	F3	IC401	G1	R322	A6	R1120	F3	R1429	K7	RB1105	*G1
C308	A5	C1305	*E2	C1733	*K10	C1824	*H10	CL606	F3	IC402	E3	R323	A6	R1121	E2	R1430	K7	RB1106	E3
C309	A5	C1306	*E2	C1734	*K10	C1825	*J9	CL607	F3	IC501	L1	R324	A6	R1122	D2	R1431	K7	RB1107	E3
C310	B4	C1307	*F2	C1735	*K9	C1826	*J9	CL608	F3	IC502	L1	R325	A6	R1123	E3	R1432	K7	RB1108	N1
C311	B5	C1308	*F2	C1736	*K9	C1827	*H10	CL1101	E4	IC503	L1	R326	A6	R1124	E1	R1433	K7	RB1109	N1
C312	B4	C1309	*B11	C1737	*K10	C1828	*H10	CL1102	E4	IC504	C12	R327	A6	R1125	C1	R1434	K7	RB1110	P1
C313	B5	C1310	*B11	C1738	*K9	C1829	*J9	CL1103	E4	IC505	C12	R328	C7	R1126	C1	R1435	K7	RB1111	N1
C314	B4	C1311	*B11	C1739	*K9	C1830	*J9			IC506	E2	R329	A6	R1127	C1	R1436	K8	RB1401	F4
C315	B5	C1312	*B11	C1740	*K9	C1831	*H10	CN201	J7	IC507	D2	R401	G1	R1128	B1	R1437	K8	RB1402	F4
C316	B5	C1313	E2	C1741	*K10	C1832	*H10	CN701	L2	IC508	*B11	R402	F1	R1129	B1	R1438	K8		
C317	B6	C1314	E2	C1742	*K10	C1833	*J9	CN702	L5	IC509	*B11	R403	G1	R1130	D2	R1439	K8	S501	J1
C318	A6	C1315	F1	C1743	*K9	C1834	*J9	CN703	C1	IC510	*B11	R404	G1	R1131	F3	R1440	K8	S701	K1
C319	B6	C1316	F1	C1744	*K9	C1835	*H10	CN704	C1	IC511	*B11	R405	D1	R1132	*F3	R1441	K7	S1101	G1
C320	B6	C1317	*B11	C1745	*J9	C1836	*H10	CN1201	G1	IC601	F3	R406	G1	R1133	*F3	R1442	K7	S1102	J1
C321	B6	C1318	*B11	C1746	*K10	C1837	*J9	CN1301	E1	IC602	*C12	R407	G1	R1134	J1	R1443	*H10		
C322	A6	C1319	*B11	C1747	*K9	C1838	*J9	CN1401	J6	IC701	D1	R408	G1	R1201	G1	R1444	*H10	SORI01	A6
C323	A6	C1320	*B11	C1748	*K9	C1839	*J10			IC801	*C11	R409	E3	R1202	G1	R1445	*H10	SORI02	R6
C324	A6	C1321	E2	C1749	*K10	C1840	*J10	CNB1	B12	IC802	J3	R410	E3	R1203	G1	R1446	*H9		
C325	B6	C1322	E2	C1750	*K10	C1841	*J9	CNC1	C12	IC901	*C11	R411	E3	R1204	G1	R1447	*H9	T1301	B12
C326	B6	C1323	F1	C1751	*K8	C1842	*J9	CND1	D12	IC902	J4	R412	E3	R1205	G1	R1448	*H9		
C327	B6	C1324	F1	C1752	*K8	C1843	*J10	CNE1	E12	IC1001	K3	R413	E3	R1206	G1	R1449	K8	TP201	A9
C328	B7	C1325	*B11	C1753	*K10	C1844	*J10	CNG1	G12	IC1002	L3	R414	E3	R1207	G1			TP202	A11
C401	F1	C1326	*B11	C1754	*K10	C1845	*J9	CNJ1	J12	IC1101	D2	R415	E3	R1208	G1	RB601	E3	TP203	B9
C402	F2	C1327	*B11	C1755	*K9	C1846	*J9	CNK1	K12	IC1103	E2	R416	D1	R1209	F4	RB602	E3	TP204	B2
C403	G1	C1328	*B11	C1756	*K9	C1847	*J10	CNL1	L12	IC1401	J9	R417	D1	R1210	F4	RB603	E3	TP205	K6
C404	G2	C1329	E2	C1757	*K10	C1848	*J10	CNN1	N12	IC1402	F3	R418	F2	R1211	F4	RB604	E3	TP301	C5
C405	G2	C1330	E2	C1758	*K10	C1849	*J9	CNP1	P12			R501	L1	R1212	F4	RB605	E4	TP302	C7
C406	D3	C1331	F1	C1759	*J9	C1850	*J9			L201	K7	R502	K1	R1213	F4	RB606	E4	TP401	G1
C501	L1	C1332	F1	C1760	*K9	C1851	*J10	D201	A9			R503	L1	R1214	F4	RB607	E4	TP501	K1
C502	K1	C1333	*B12	C1761	*K10	C1852	*J10	D202	A12	PS201	J6	R504	L1	R1215	F3	RB608	E4	TP502	E2
C503	L1	C1334	B12	C1762	*K11	C1853	*J10	D203	D1			R505	C12	R1216	E4	RB609	E4		
C504	L1	C1335	B12	C1763	*J9	C1854	*J10	D301	A5	Q201	A8	R506	C12	R1217	F4	RB610	E4	X1101	F4
C505	C12	C1336	B12	C1764	*J9	C1855	*J10	D302	A6	Q202	A8	R507	E2	R1218	F3	RB611	E3		
C506	C12	C1337	B12	C1765	*J11	C1856	*J10	D401	D1	Q203	A9	R508	E2	R1219	F3	RB612	E3		
C507	C12	C1338	*F3	C1766	*J11	C1857	*J9	D402	G2	Q204	B2	R509	*B11	R1220	F3	RB613	E4		
C508	C12	C1339	*F4	C1767	*K9	C1858	*J10	D403	D1	Q205	K7	R510	*B11	R1221	F3	RB614	E4		
C509	E2	C1340	*F3	C1768	*J9	C1859	*K9	D1101	E1	Q301	A6	R511	*B11	R1222	F4	RB615	E4		
C510	E2	C1341	*F3	C1769	*J11	C1860	*H9	D1102	C1	Q302	A6	R512	*B11	R1223	F3	RB701	D1		
C511	E2	C1342	*F3	C1770	*J10	C1861	*J9	D1103	C1	Q401	F1	R513	*B11	R1224	F3	RB702	K2		
C512	D2	C1343	*F4	C1771	*K9	C1862	*J10	D1104	B1	Q402	E3	R514	*B11	R1301	B11	RB703	K2		
C513	E2	C1344	*F4	C1772	*K9	C1863	*J11	D1107	N1	Q403	E3	R515	*B11	R1302	B11	RB704	K2		
C514	E2	C1345	*F4	C1773	*J10	C1864	*J10	D1108	N1	Q404	F2	R516	*B11	R1303	B11	RB705	K2		
C515	*B11	C1346	*F3	C1774	*K10	C1865	*J9	D1109	N1			R517	L1	R1304	B11	RB706	K2		
C516	*B11	C1347	*F3	C1775	*K9	C1866	*J9	D1110	N1	R201	A8	R601	*C12	R1305	B11	RB707	K2		
C517	*C11	C1348	*F3	C1776	*K9	C1867	*J10	D1111	N1	R202	A9	R602	E3	R1306	B11	RB708	K2		
C518	*B11	C1349	*F3	C1777	*J10	C1868	*J9	D1112	N1	R203	A11	R603	E3	R1307	B11	RB709	K2		
C601	*F3	C1350	*F4	C1778	*J10	C1869	*J9	D1113	N1	R204	A11	R604	E3	R1308	B11	RB710	L2		
C602	*C12	C1351	*F3	C1779	*J8	C1870	*H9	D1114	N1	R205	A11	R605	E3	R1309	E2	RB711	L2		
C701	M1	C1352	*F3	C1780	*K9	C1871	*J9	D1115	P1	R206	A8	R606	*D12	R1310	E2	RB712	L2		
C702	D2	C1353	*F3	C1781	*J10	C1872	*H9	D1116	P1	R207	*B8	R607	*F3	R1311	E2	RB713	L2		
C703	D2	C1354	*F3	C1782	*K10	C1873	*H9	D1117	P1	R208	*B8	R608	E3	R1312	E2	RB714	L2		
C704	D1	C1355	*F3	C1783	*K9	C1874	*H9	D1118	N1	R209	*B8	R609	E3	R1313	F2	RB715	L2		
C705	D1	C1356	*F3	C1784	*J10	C1875	*H9	D1119	N1	R210	B8	R610	G3	R1314	F2	RB716	K2		
C706	D2	C1357	*F3	C1785	*K10	C1876	*H9	D1120	N1	R211	B2	R611	*F3	R1315	F2	RB717	L2		
C707	M5	C1358	*F3	C1786	*J10	C1877	*J9	D1121	P1	R212	B2	R612	E3	R1316	F2	RB718	L2		
C801	*C11	C1359	*F3	C1787	*J11	C1878	*J9	D1122	P1	R213	B3	R613	E3	R1317	M1	RB719	L2		
C802	H3	C1360	*F4	C1788	*J11	C1879	*J9	D1301	M1	R214	B2	R614	E3	R1318	M1	RB720	L2		
C803	*C11	C1361	*F3	C1789	*J10	C1880	*J9	D1302	M1	R215	B3	R615	E3	R1319	*B12	RB721	L2		
C804	H3	C1362	*F3	C1790	*K9	C1881	*J9			R216	B2	R616	G3	R1320	*B12	RB722	L2		
C805	*C12	C1401	F3	C1791	*J10	C1882	*J9	DD201	B8	R217	B2	R617	*F3	R1321	*B12	RB723	K2		
C806	J3	C1701	M10	C1792	*J10	C1883	*J9			R218	B3	R1001	K4	R1322	*B12	RB724	*L2		
C807	*C12	C1702	J7	C1793	*K10	C1884	*J9	E201	A11	R219	J6	R1002	K3	R1323	F1	RB725	L1		
C808	J3	C1703	G10	C1794	*K10	C1885	*J9	E202	*A11	R220	K6	R1003	K3	R1324	E1	RB726	L1		
C901	*C11	C1704	L10	C1795	*J10	C1886	*J9	E203	A3	R221	J6	R1004	K3	R1401	F4	RB801	C12		

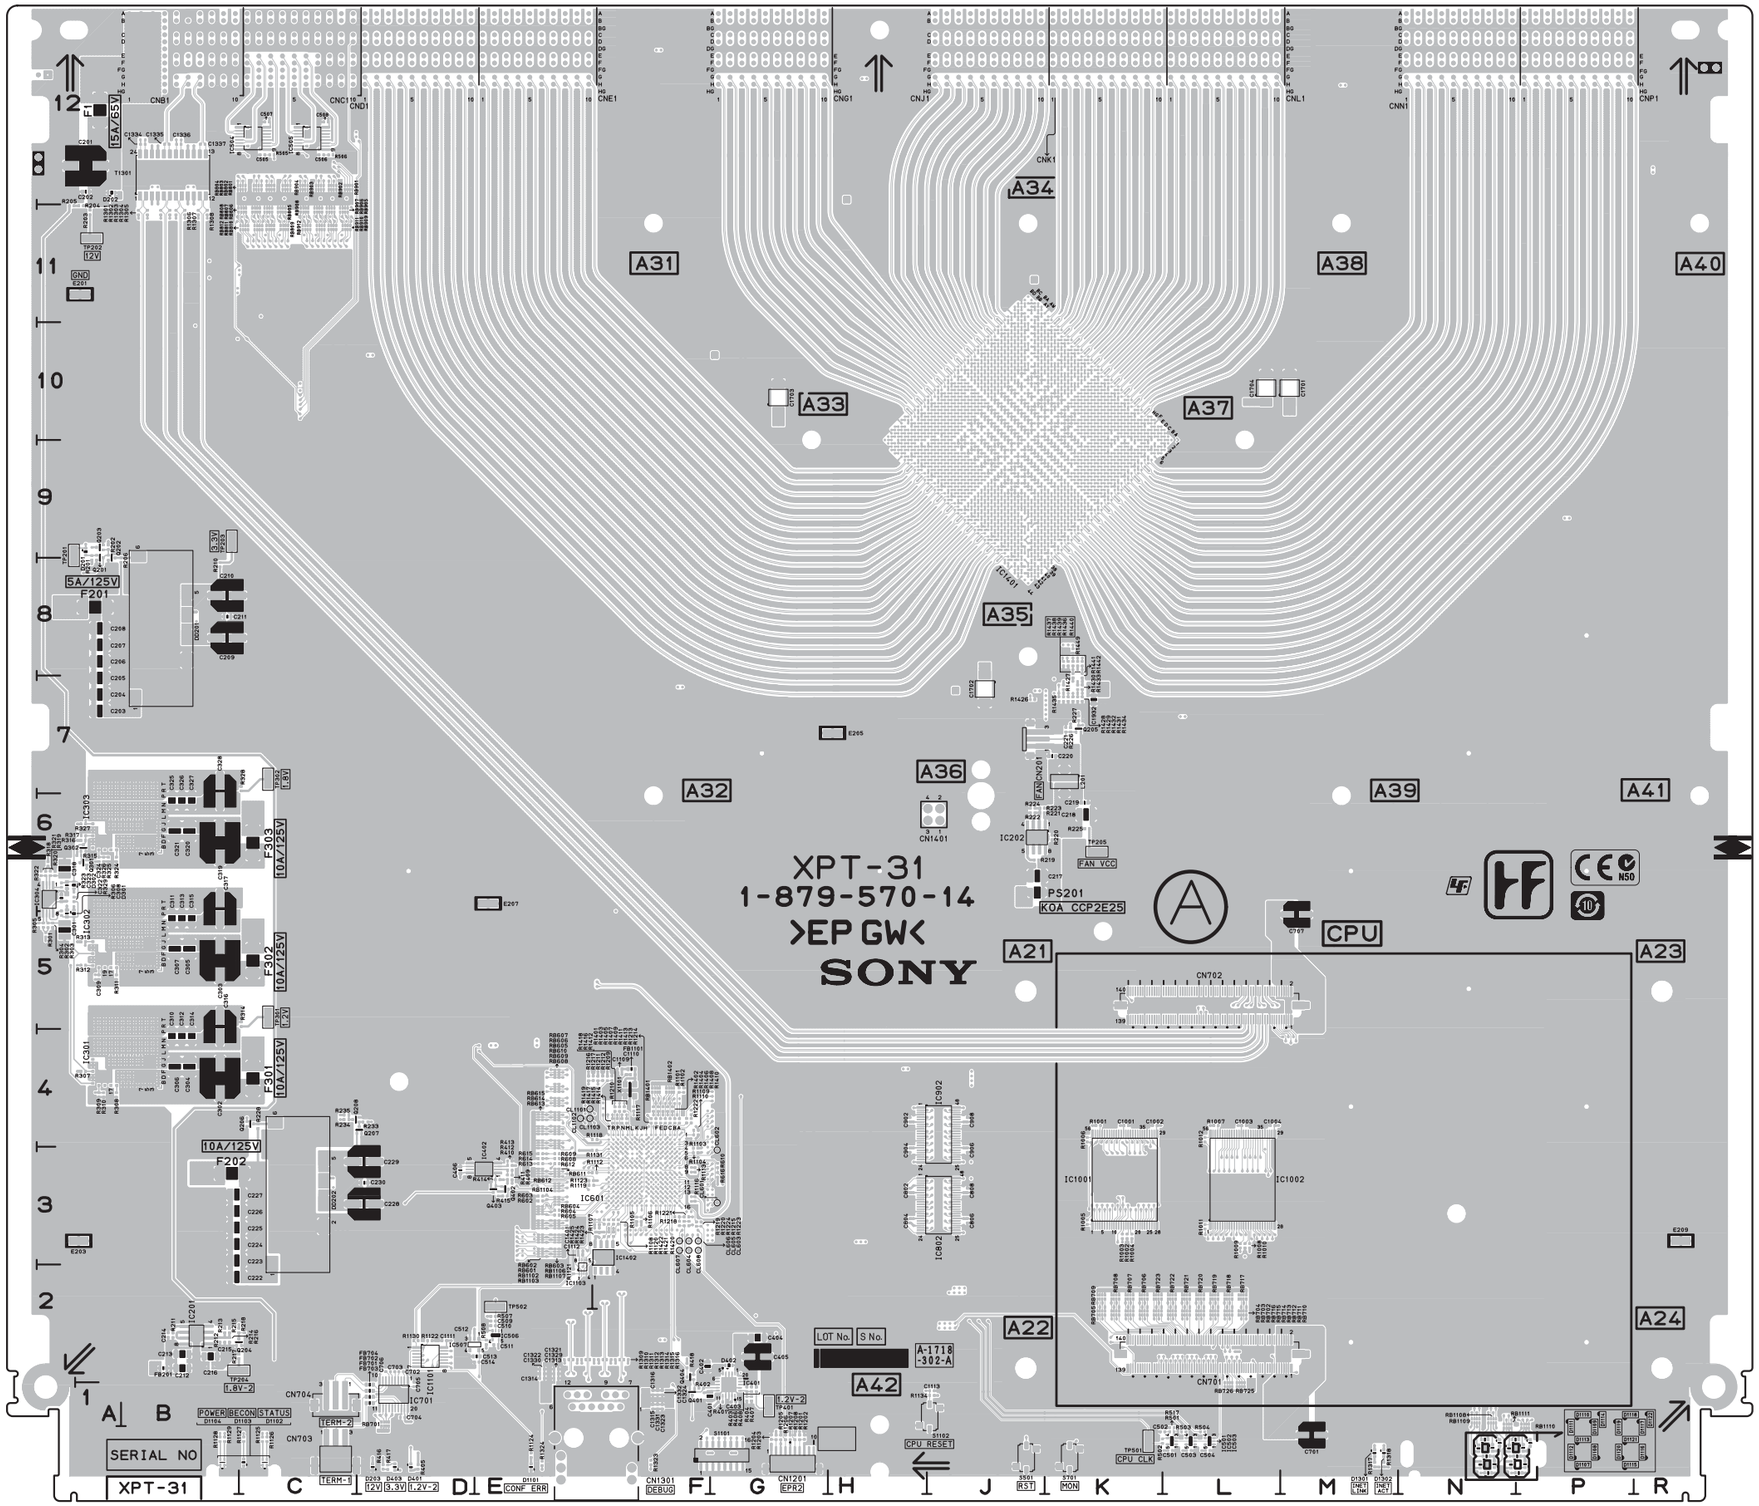

XPT-31/31A -A SIDE-
SUFFIX: -14

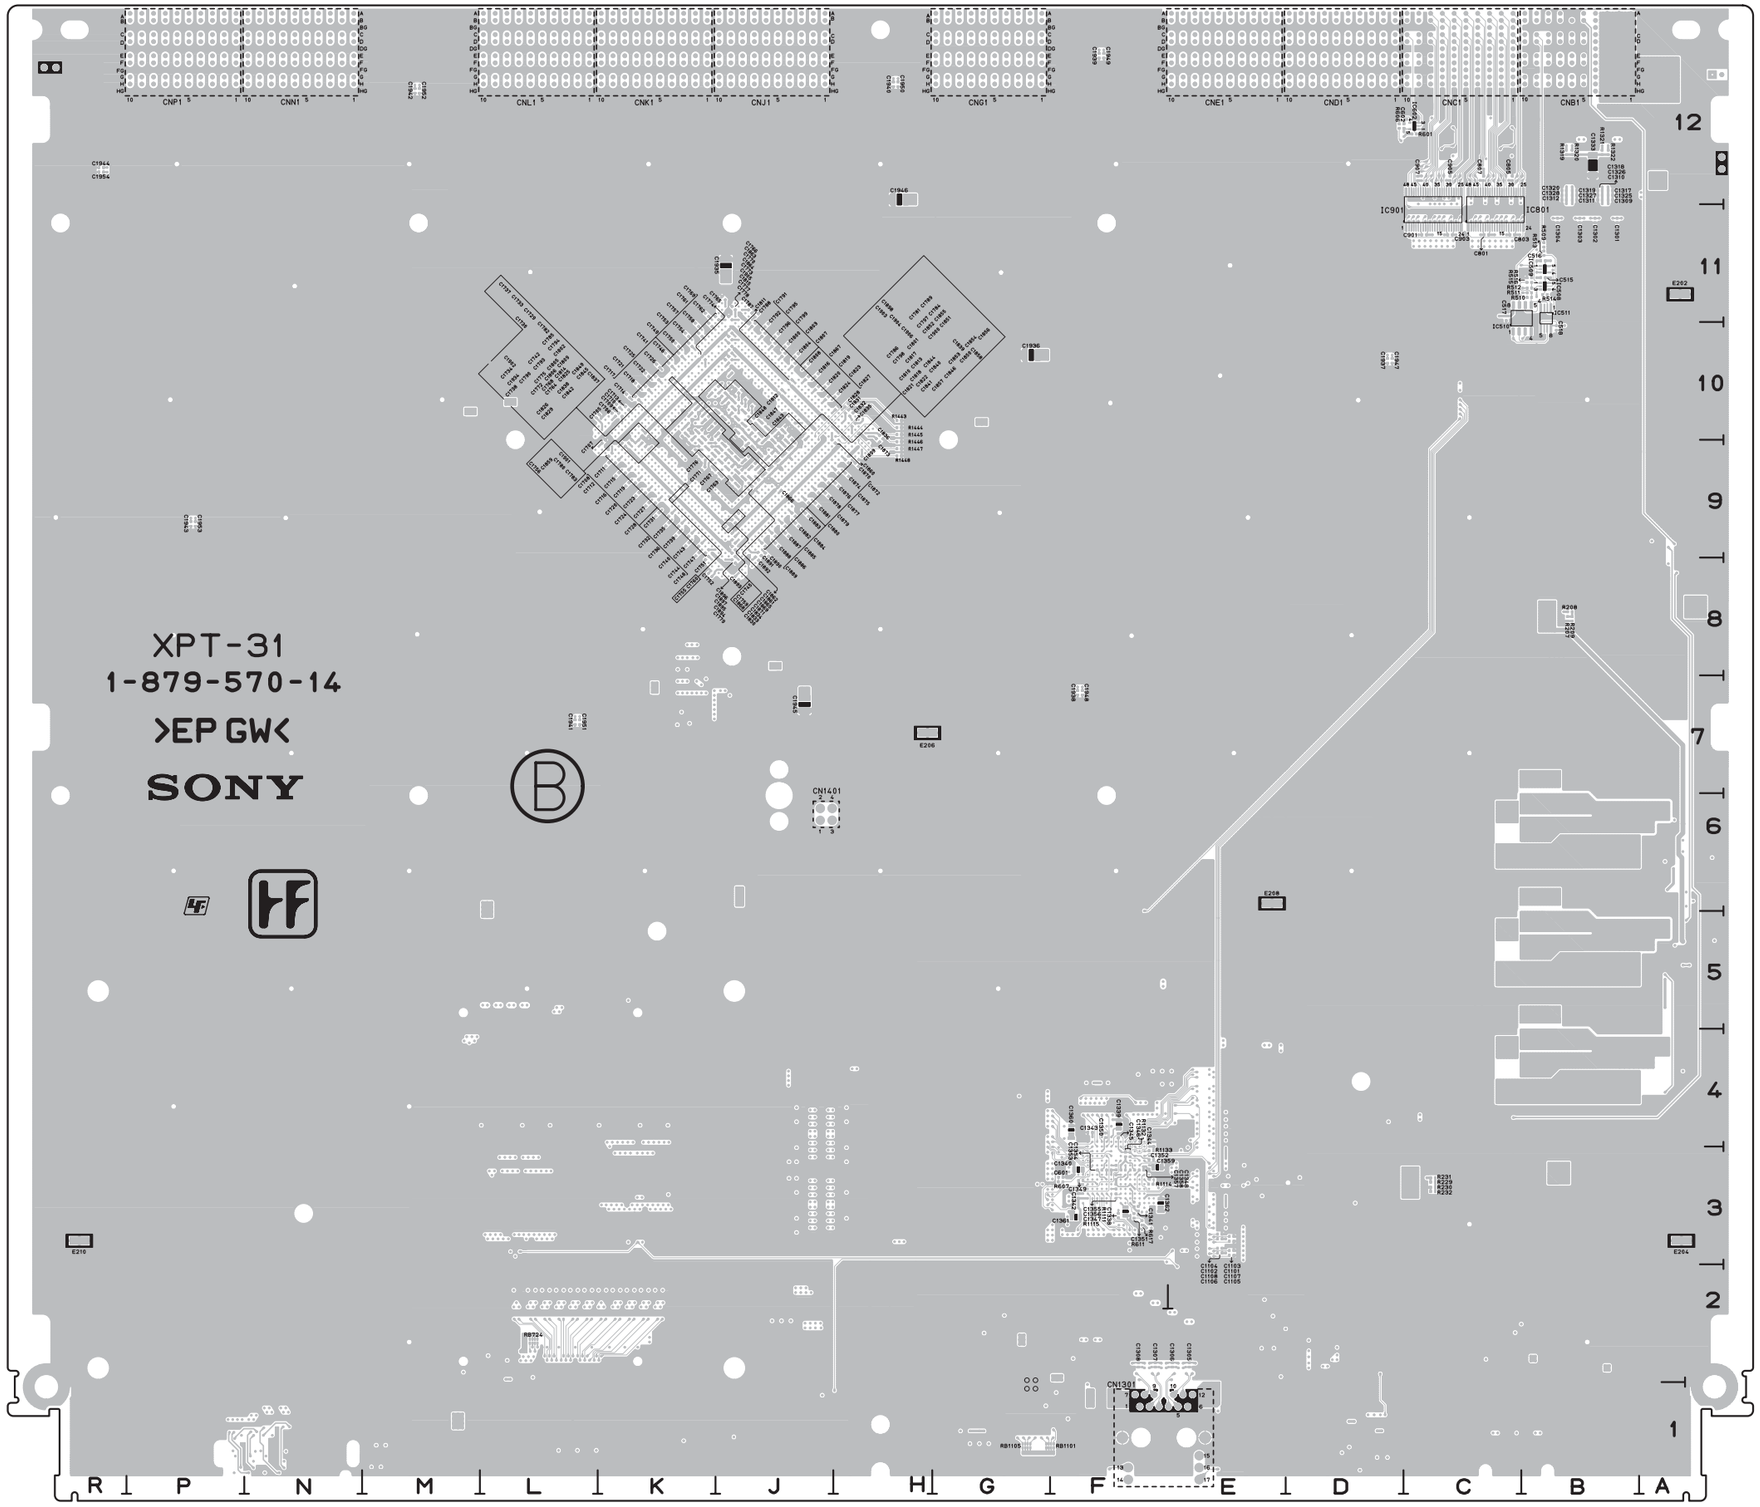

XPT-31/31A -B SIDE-
SUFFIX: -14

XPT-31/31A (1-879-570-14)
---
*:B SIDE

C201	A12	C801	*C11	C1359	*F3	C1787	*J11	C1878	*J9	D1101	E1	Q204	B2	R416	D1	R1209	F4	RB602	E3	TP204	B2
C202	A12	C802	H3	C1360	*F4	C1788	*J11	C1879	*J9	D1102	C1	Q205	K7	R417	D1	R1210	F4	RB603	E3	TP205	K6
C203	A7	C803	*C11	C1361	*F3	C1789	*J10	C1880	*J9	D1103	C1	Q206	C4	R418	F2	R1211	F4	RB604	E3	TP301	C5
C204	A7	C804	H3	C1362	*F3	C1790	*K9	C1881	*J9	D1104	B1	Q207	D4	R501	L1	R1212	F4	RB605	E4	TP302	C7
C205	A7	C805	*C12	C1401	F3	C1791	*J10	C1882	*J9	D1107	N1	Q208	C4	R502	K1	R1213	F4	RB606	E4	TP401	G1
C206	A8	C806	J3	C1701	M10	C1792	*J10	C1883	*J9	D1108	N1	Q301	A6	R503	L1	R1214	F4	RB607	E4	TP501	K1
C207	A8	C807	*C12	C1702	J7	C1793	*K10	C1884	*J9	D1109	N1	Q302	A6	R504	L1	R1215	F3	RB608	E4	TP502	E2
C208	A8	C808	J3	C1703	G10	C1794	*K10	C1885	*J9	D1110	N1	Q401	F1	R505	C12	R1216	E4	RB609	E4		
C209	B8	C901	*C11	C1704	L10	C1795	*J10	C1886	*J9	D1111	N1	Q402	E3	R506	C12	R1217	F4	RB610	E4	X1101	F4
C210	B8	C902	H4	C1705	*K10	C1796	*J10	C1887	*J9	D1112	N1	Q403	E3	R507	E2	R1218	F3	RB611	E3		
C211	B8	C903	*C11	C1706	*K10	C1797	*J10	C1888	*J9	D1113	N1	Q404	F2	R508	E2	R1219	F3	RB612	E3		
C212	B2	C904	H3	C1707	*K9	C1798	*J10	C1889	*J9	D1114	N1			R509	*B11	R1220	F3	RB613	E4		
C213	B2	C905	*C12	C1708	*K9	C1799	*J10	C1890	*J9	D1115	P1	R201	A8	R510	*B11	R1221	F3	RB614	E4		
C214	B2	C906	J3	C1709	*K10	C1800	*J10	C1891	*J9	D1116	P1	R202	A9	R511	*B11	R1222	F4	RB615	E4		
C215	B2	C907	*C12	C1710	*K10	C1801	*J10	C1892	*J8	D1117	P1	R203	A11	R512	*B11	R1223	F3	RB701	D1		
C216	B2	C908	J4	C1711	*K9	C1802	*J10	C1893	*J8	D1118	N1	R204	A11	R513	*B11	R1224	F3	RB702	K2		
C217	J6	C1001	K4	C1712	*K9	C1803	*J10	C1894	*J9	D1119	N1	R205	A11	R514	*B11	R1301	B11	RB703	K2		
C218	K6	C1002	K4	C1713	*K10	C1804	*J10	C1895	*J9	D1120	N1	R206	A8	R515	*B11	R1302	B11	RB704	K2		
C219	K6	C1003	L4	C1714	*K10	C1805	*J9	C1896	*J9	D1121	P1	R207	*B8	R516	*B11	R1303	B11	RB705	K2		
C220	K7	C1004	L4	C1715	*K9	C1806	*J9	C1897	*J9	D1122	P1	R208	*B8	R517	L1	R1304	B11	RB706	K2		
C221	K7	C1101	*E3	C1716	*K9	C1807	*J10	C1898	*J10	D1301	M1	R209	*B8	R601	*C12	R1305	B11	RB707	K2		
C222	B2	C1102	*E3	C1717	*K10	C1808	*J10	C1899	*H9	D1302	M1	R210	B8	R602	E3	R1306	B11	RB708	K2		
C223	B3	C1103	*E3	C1718	*K10	C1809	*J9	C1900	*J10			R211	B2	R603	E3	R1307	B11	RB709	K2		
C224	B3	C1104	*E3	C1719	*K9	C1810	*J10	C1901	*K10	DD201	B8	R212	B2	R604	E3	R1308	B11	RB710	L2		
C225	B3	C1105	*E3	C1720	*K9	C1811	*J10	C1902	*K10	DD202	C3	R213	B2	R605	E3	R1309	E2	RB711	L2		
C226	B3	C1106	*E3	C1721	*K10	C1812	*J10	C1903	*K10			R214	B2	R606	*D12	R1310	E2	RB712	L2		
C227	B3	C1107	*E3	C1722	*K10	C1813	*J10	C1904	*J10	E201	A11	R215	B2	R607	*F3	R1311	E2	RB713	L2		
C228	D3	C1108	*E3	C1723	*K9	C1814	*J9	C1905	*J10	E202	*A11	R216	B2	R608	E3	R1312	E2	RB714	L2		
C229	D3	C1109	F4	C1724	*K9	C1815	*J10	C1906	*J10	E203	A3	R217	B2	R609	E3	R1313	F2	RB715	L2		
C230	D3	C1110	F4	C1725	*K10	C1816	*J10	C1932	K7	E204	*A3	R218	B2	R610	G3	R1314	F2	RB716	K2		
C301	A5	C1111	D2	C1726	*K10	C1817	*J10	C1934	*K9	E205	H7	R219	J6	R611	*F3	R1315	F2	RB717	L2		
C302	B4	C1112	E3	C1727	*K9	C1818	*J10	C1935	*J11	E206	*H7	R220	K6	R612	E3	R1316	F2	RB718	L2		
C303	B5	C1113	J1	C1728	*K9	C1819	*J10	C1936	*G10	E207	E6	R221	J6	R613	E3	R1317	M1	RB719	L2		
C304	B4	C1301	*B11	C1729	*K10	C1820	*J10	C1937	*D10	E208	*E6	R222	J6	R614	E3	R1318	M1	RB720	L2		
C305	B5	C1302	*B11	C1730	*K10	C1821	*J9	C1938	*F7	E209	R3	R223	J6	R615	E3	R1319	*B12	RB721	L2		
C306	B4	C1303	*B11	C1731	*K9	C1822	*J9	C1939	*F12	E210	*R3	R224	J6	R616	G3	R1320	*B12	RB722	L2		
C307	B5	C1304	*B11	C1732	*K9	C1823	*J10	C1940	*H12			R225	K6	R617	*F3	R1321	*B12	RB723	K2		
C308	A5	C1305	*E2	C1733	*K10	C1824	*H10	C1941	*L7	F1	A12	R226	K7	R1001	K4	R1322	*B12	RB724	*L2		
C309	A5	C1306	*E2	C1734	*K10	C1825	*J9	C1942	*M12	F201	A8	R227	K7	R1002	K3	R1323	F1	RB725	L1		
C310	B4	C1307	*F2	C1735	*K9	C1826	*J9	C1943	*P9	F202	B3	R228	C4	R1003	K3	R1324	E1	RB726	L1		
C311	B5	C1308	*F2	C1736	*K9	C1827	*H10	C1944	*R12	F301	C4	R229	*C3	R1004	K3	R1401	F4	RB801	C12		
C312	B4	C1309	*B12	C1737	*K10	C1828	*H10	C1945	*J7	F302	C5	R230	*C3	R1005	K3	R1402	F4	RB802	C12		
C313	B5	C1310	*B12	C1738	*K9	C1829	*J9	C1946	*H12	F303	C6	R231	*C3	R1006	K4	R1403	F4	RB803	C12		
C314	B4	C1311	*B12	C1739	*K9	C1830	*J9	C1947	*D10			R232	*C3	R1007	L4	R1404	F4	RB804	C12		
C315	B5	C1312	*B12	C1740	*K9	C1831	*H10	C1948	*F7	FB201	B2	R233	D4	R1008	L3	R1405	F4	RB805	C11		
C316	B5	C1313	E2	C1741	*K10	C1832	*H10	C1949	*F12	FB701	D1	R234	C4	R1009	L3	R1406	F4	RB806	C11		
C317	B6	C1314	E2	C1742	*K10	C1833	*J9	C1950	*H12	FB702	D1	R235	C4	R1010	L3	R1407	F4	RB807	C11		
C318	A6	C1315	F1	C1743	*K9	C1834	*J9	C1951	*L7	FB703	D1	R301	A5	R1011	L3	R1408	F4	RB808	C11		
C319	B6	C1316	F1	C1744	*K9	C1835	*H10	C1952	*M12	FB704	D1	R302	A5	R1012	L4	R1409	F4	RB809	C11		
C320	B6	C1317	*B12	C1745	*J9	C1836	*H10	C1953	*P9	FB1101	F4	R303	A5	R1101	F4	R1410	F4	RB810	C11		
C321	B6	C1318	*B12	C1746	*K10	C1837	*J9	C1954	*R12			R304	A5	R1102	F4	R1411	F4	RB811	C11		
C322	A6	C1319	*B12	C1747	*K9	C1838	*J9			IC201	B2	R305	A5	R1103	F3	R1412	F4	RB812	C11		
C323	A6	C1320	*B12	C1748	*K9	C1839	*J10	CL601	G3	IC202	J6	R306	A5	R1104	F3	R1413	F4	RB901	C12		
C324	A6	C1321	E2	C1749	*K10	C1840	*J10	CL602	G3	IC301	B4	R307	A4	R1105	F3	R1414	F4	RB902	C12		
C325	B6	C1322	E2	C1750	*K10	C1841	*J9	CL603	F3	IC302	B5	R308	A4	R1106	F3	R1415	F4	RB903	C12		
C326	B6	C1323	F1	C1751	*K8	C1842	*J9	CL604	F3	IC303	B6	R309	A4	R1107	F3	R1416	F4	RB904	C12		
C327	B6	C1324	F1	C1752	*K8	C1843	*J10	CL605	F3	IC304	A6	R310	A4	R1108	F3	R1417	F4	RB905	C11		
C328	B7	C1325	*B12	C1753	*K10	C1844	*J10	CL606	F3	IC401	G1	R311	A5	R1109	F4	R1418	F4	RB906	C11		
C401	F1	C1326	*B12	C1754	*K10	C1845	*J9	CL607	F3	IC402	E3	R312	A5	R1110	F4	R1419	F4	RB907	C11		
C402	F2	C1327	*B12	C1755	*K9	C1846	*J9	CL608	F3	IC501	L1	R313	A5	R1111	*F3	R1420	F3	RB908	C11		
C403	G1	C1328	*B12	C1756	*K9	C1847	*J10	CL1101	E4	IC502	L1	R314	C5	R1112	F3	R1421	F3	RB909	C11		
C404	G2	C1329	E2	C1757	*K10	C1848	*J10	CL1102	E4	IC503	L1	R315	A6	R1113	F3	R1422	F3	RB910	C11		
C405	G2	C1330	E2	C1758	*K10	C1849	*J9	CL1103	E4	IC504	C12	R316	A6	R1114	*F3	R1423	F3	RB911	C11		
C406	D3	C1331	F1	C1759	*J9	C1850	*J9			IC505	C12	R317	A6	R1115	*F3	R1424	F3	RB912	C11		
C501	L1	C1332	F1	C1760	*K9	C1851	*J10	CN201	J7	IC506	E2	R318	A6	R1116	F3	R1425	F3	RB1101	*F1		
C502	K1	C1333	*B12	C1761	*K10	C1852	*J10	CN701	L2	IC507	D2	R319	A6	R1117	F4	R1426	J7	RB1102	E3		
C503	L1	C1334	B12	C1762	*K11	C1853	*J10	CN702	L5	IC508	*B11	R320	A6	R1118	F4	R1427	K7	RB1103	E3		
C504	L1	C1335	B12	C1763	*J9	C1854	*J10	CN703	C1	IC509	*B11	R321	A6	R1119	E3	R1428	K7	RB1104	E3		
C505	C12	C1336	B12	C1764	*J9	C1855	*J10	CN704	C1	IC510	*B11	R322	A6	R1120	F3	R1429	K7	RB1105	*G1		
C506	C12	C1337	B12	C1765	*J11	C1856	*J10	CN1201	G1	IC511	*B11	R323	A6	R1121	E2	R1430	K7	RB1106	E3		
C507	C12	C1338	*F3	C1766	*J11	C1857	*J9	CN1301	E1	IC601	F3	R324	A6	R1122	D2	R1431	K7	RB1107	E3		
C508	C12	C1339	*F4	C1767	*K9	C1858	*J10	CN1401	J6	IC602	*C12	R325	A6	R1123	E3	R1432	K7	RB1108	N1		
C509	E2	C1340	*F3	C1768	*J9	C1859	*K9	CNB1	B12	IC701	D1	R326	A6	R1124	E1	R1433	K7	RB1109	N1		
C510	E2	C1341	*F3	C1769	*J11	C1860	*H9	CNC1	C12	IC801	*C11	R327	A6	R1125	C1	R1434	K7	RB1110	P1		
C511	E2	C1342	*F3	C1770	*J10	C1861	*J9	CND1	D12	IC802	J3	R328	C7	R1126	C1	R1435	K7	RB1111	N1		
C512	D2	C1343	*F4	C1771	*K9	C1862	*J10	CNE1	E12	IC901	*C11	R329	A6	R1127	C1	R1436	K8	RB1401	F4		
C513	E2	C1344	*F4	C1772	*K9	C1863	*J11	CNG1	G12	IC902	J4	R401	G1	R1128	B1	R1437	K8	RB1402	F4		
C514	E2	C1345	*F4	C1773	*J10	C1864	*J10	CNJ1	J12	IC1001	K3	R402	F1	R1129	B1	R1438	K8				
C515	*B11	C1346	*F3	C1774	*K10	C1865	*J9	CNK1	K12	IC1002	L3	R403	G1	R1130	D2	R1439	K8	S501	J1		
C516	*B11	C1347	*F3	C1775	*K9	C1866	*J9	CNL1	L12	IC1101	D2	R404	G1	R1131	F3	R1440	K8	S701	K1		
C517	*C11	C1348	*F3	C1776	*K9	C1867	*J10	CNN1	N12	IC1103	E2	R405	D1	R1132	*F3	R1441	K7	S1101	G1		
C518	*B10	C1349	*F3	C1777	*J10	C1868	*J9	CNP1	P12	IC1401	J9	R406	G1	R1133	*F3	R1442	K7	S1102	J1		
C601	*F3	C1350	*F4	C1778	*J10	C1869	*J9			IC1402	F3	R407	G1	R1134	J1	R1443	*H10				
C602	*C12	C1351	*F3	C1779	*J8	C1870	*H9	D201	A9			R408	G1	R1201	G1	R1444	*H10	SORI01	A6		
C701	M1	C1352	*F3	C1780	*K9	C1871	*J9	D202	A12	L201	K7	R409	E3	R1202	G1	R1445	*H10	SORI02	R6		
C702	D2	C1353	*F3	C1781	*J10	C1872	*H9	D203	D1			R410	E3	R1203	G1	R1446	*H9				
C703	D2	C1354	*F3	C1782	*K10	C1873	*H9	D301	A5	PS201	J6	R411	E3	R1204	G1	R1447	*H9	T1301	B12		
C704	D1	C1355	*F3	C1783	*K9	C1874	*H9	D302	A6			R412	E3	R1205	G1	R1448	*H9				
C705	D1	C1356	*F3	C1784	*J10	C1875	*H9	D401	D1	Q201	A8	R413	E3	R1206	G1	R1449	K8	TP201	A9		
C706	D2	C1357	*F3	C1785	*K10	C1876	*H9	D402	G2	Q202	A8	R414	E3	R1207	G1			TP202	A11		
C707	M5	C1358	*F3	C1786	*J10	C1877	*J9	D403	D1	Q203	A9	R415	E3	R1208	G1	RB601	E3	TP203	B9		

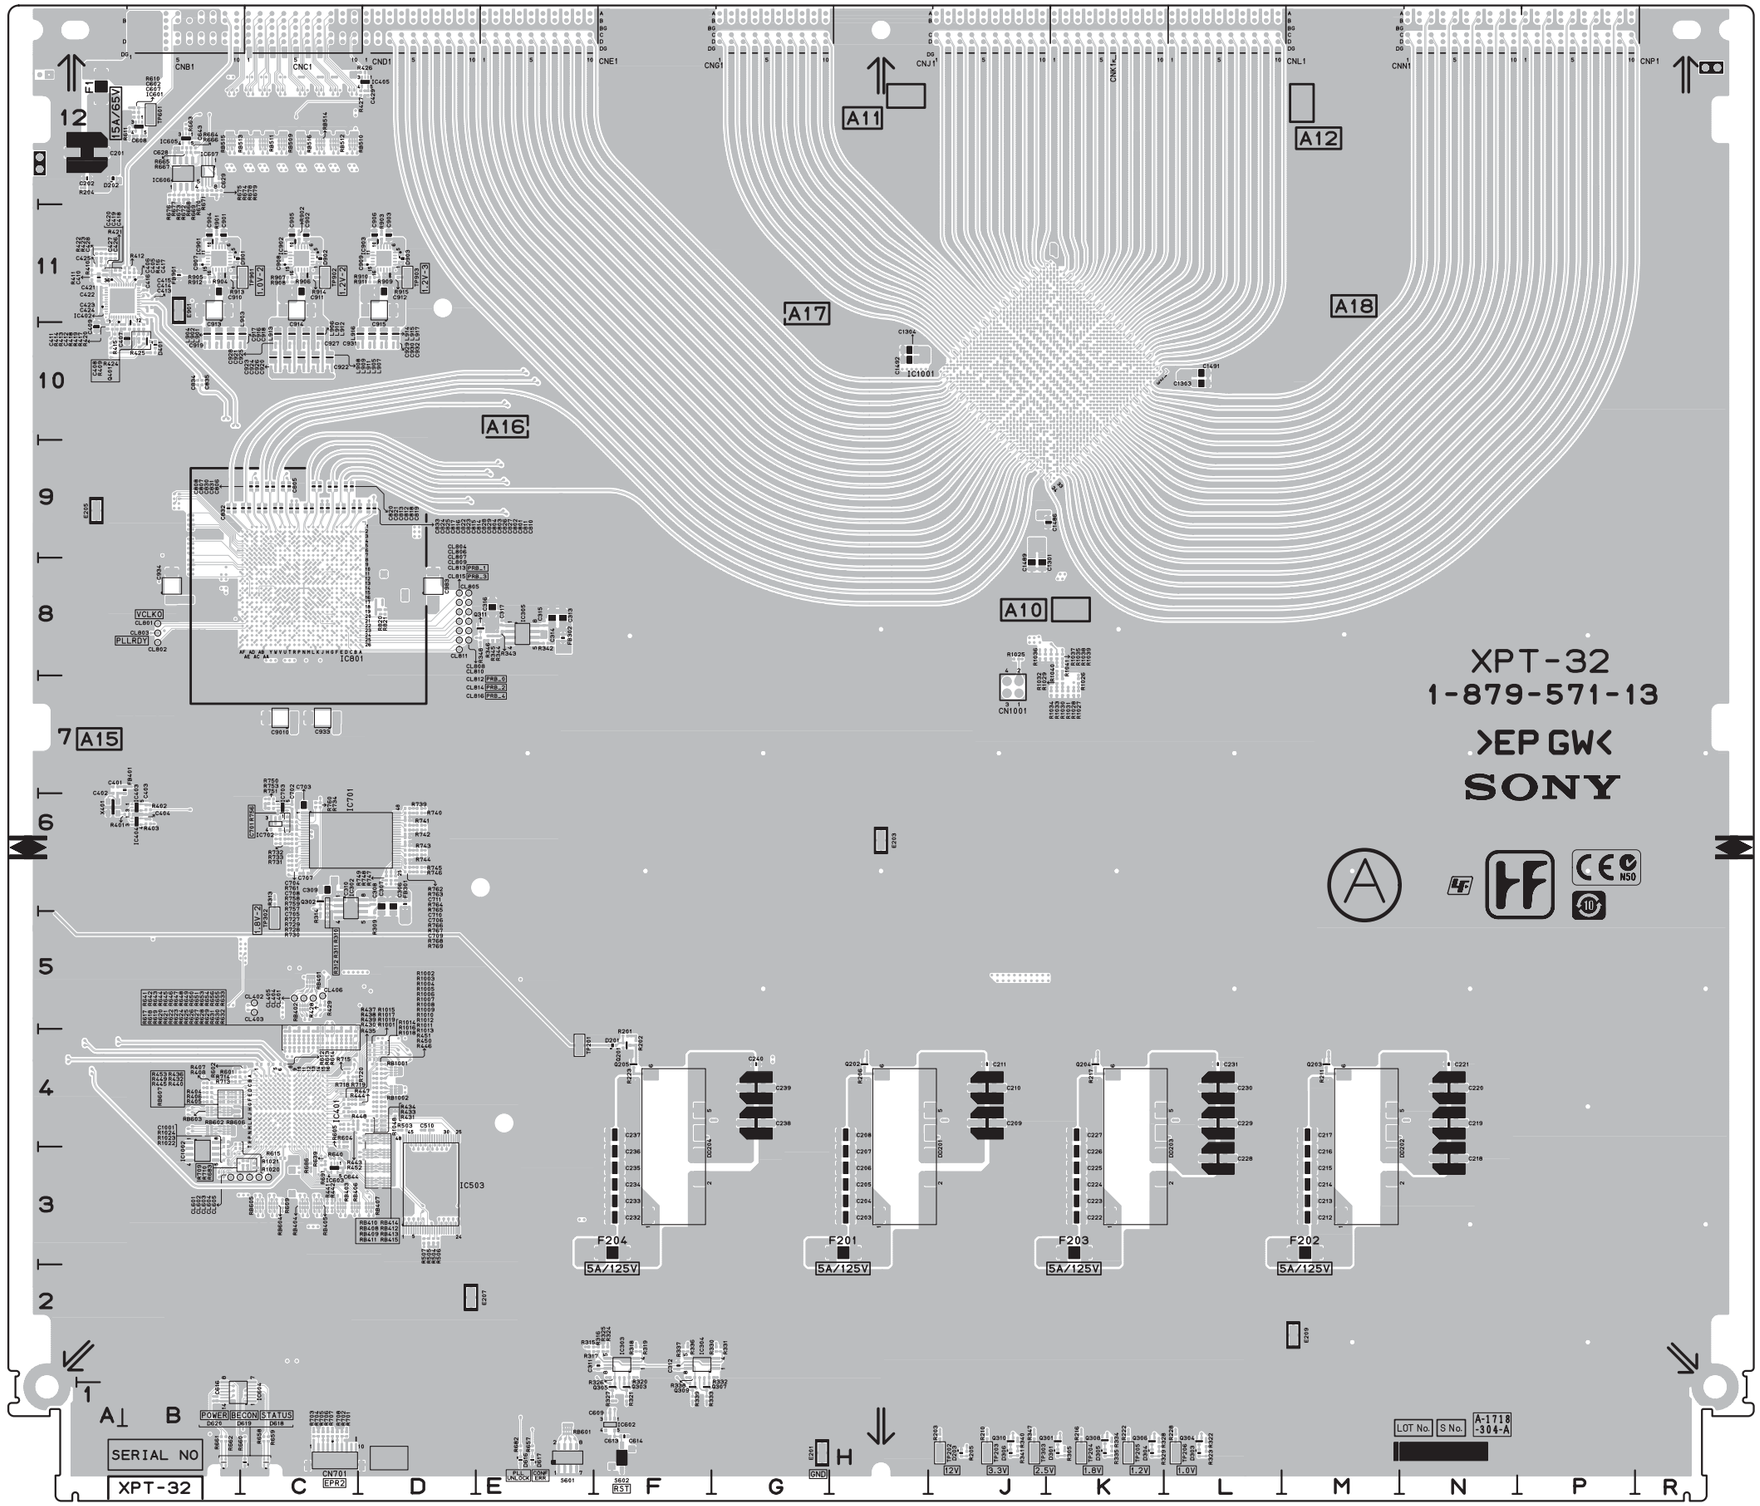

XPT-32 -A SIDE-
SUFFIX: -13

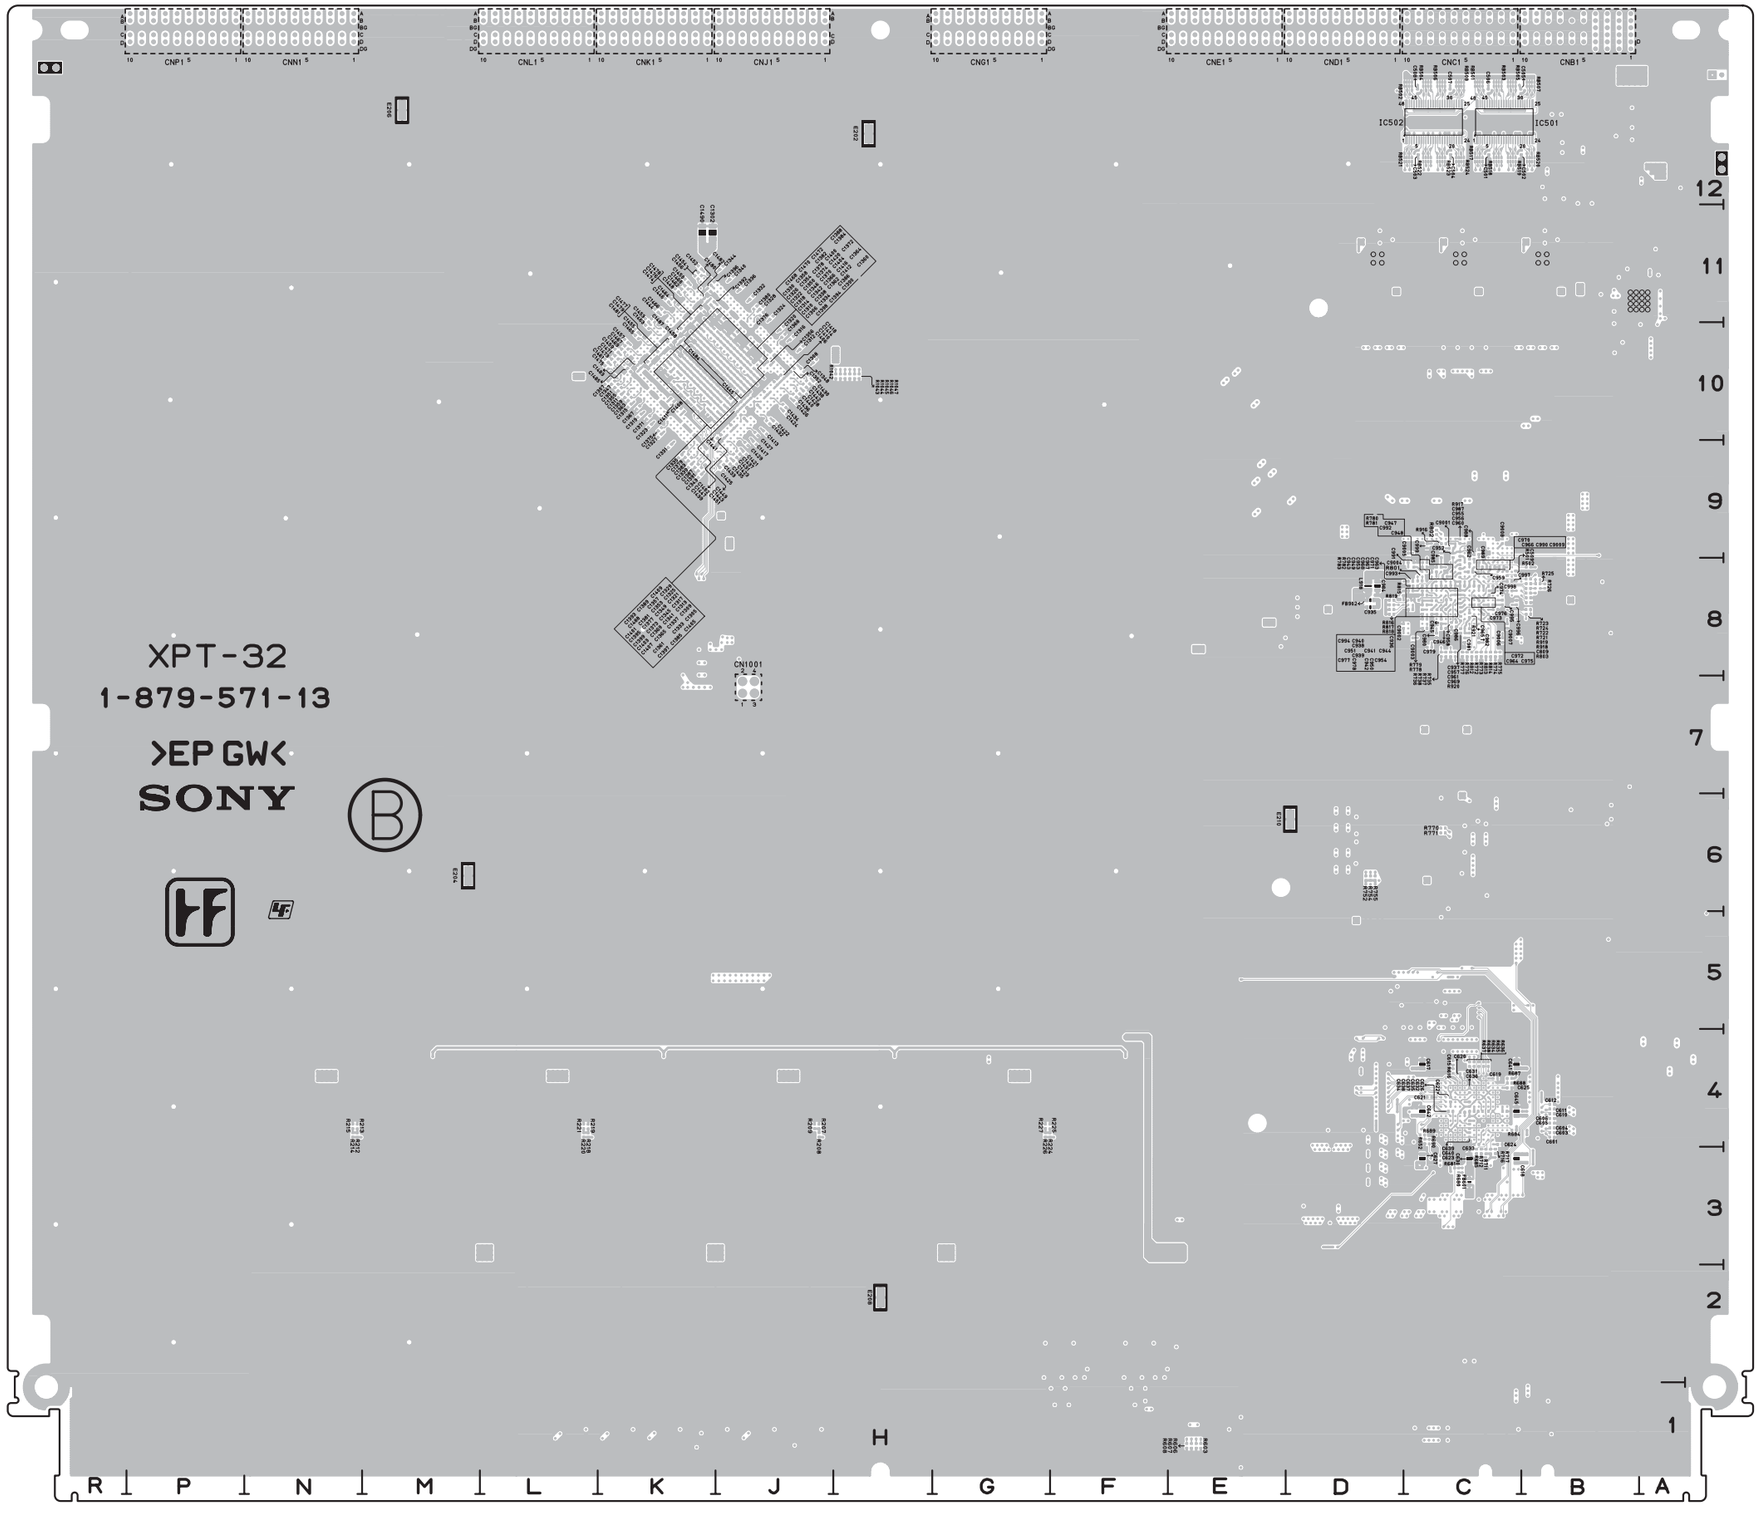

XPT-32 -B SIDE-
SUFFIX: -13

XPT-32 (1-879-571-13)
---
*:B SIDE

C201	A12	C601	*B4	C901	B11	C992	*C8	C1383	*K9	C1476	*K11	D619	C1	Q303	F1	R412	B11	R643	C4	R743	D6	R1017	D4	TP204	K1
C202	A12	C602	B12	C902	C11	C993	*C8	C1384	*J11	C1477	*K10	D620	B1	Q304	L1	R413	A10	R644	C4	R744	D6	R1018	D4	TP205	K1
C203	H3	C603	*B4	C903	D11	C994	*C8	C1385	*J10	C1478	*K11	D901	B11	Q305	F1	R414	A10	R645	C4	R745	D6	R1019	D4	TP206	L1
C204	H3	C604	*B4	C904	B11	C995	*C8	C1386	*J10	C1479	*K10	D902	C11	Q306	K1	R415	A10	R646	C4	R746	D6	R1020	B3	TP302	C5
C205	H3	C605	*B4	C905	C11	C996	*C8	C1387	*K9	C1480	*K11	D903	D11	Q307	F1	R416	B11	R647	C4	R747	D6	R1021	B4	TP303	J1
C206	H3	C606	*B4	C906	D11	C997	*C8	C1388	*J11	C1481	*K10			Q308	K1	R417	B10	R648	C4	R748	D6	R1022	B3	TP601	B12
C207	H3	C607	B12	C907	B11	C998	*C8	C1389	*K10	C1482	*K11	DD201	H3	Q309	F1	R418	B10	R649	C4	R749	D6	R1023	B3	TP901	C11
C208	H4	C608	B12	C908	C11	C999	*C9	C1390	*J10	C1483	*K10	DD202	M3	Q310	J1	R419	B10	R650	C4	R750	C6	R1024	B3	TP902	C11
C209	J4	C609	F1	C909	D11	C1001	B4	C1391	*K9	C1484	*K10	DD203	K3	Q311	E8	R420	B10	R651	C4	R751	C6	R1025	J8	TP903	D11
C210	J4	C610	*B4	C910	B11	C1301	J8	C1392	*K11	C1485	*K10	DD204	F3	Q401	B10	R421	A11	R652	*C4	R752	*D6	R1026	K7		
C211	J4	C611	*B4	C911	C11	C1302	*K11	C1393	*K10	C1486	K9					R422	A11	R653	C4	R753	C6	R1027	K7	X401	A6
C212	M3	C612	*B4	C912	D11	C1303	L10	C1394	*J10	C1487	*K11	E201	G1	R201	F4	R423	A11	R654	C4	R754	*D6	R1028	K7		
C213	M3	C613	F1	C913	B11	C1304	H10	C1395	*K10	C1488	*K10	E202	*H12	R202	F4	R424	B10	R655	C4	R755	*D6	R1029	K7		
C214	M3	C614	F1	C914	C11	C1305	*J10	C1396	*K11	C1489	J8	E203	H6	R203	J1	R425	B10	R656	C4	R756	C6	R1030	K7		
C215	M3	C615	*C4	C915	D11	C1306	*J10	C1397	*J10	C1490	*K11	E204	*M6	R204	A12	R426	D12	R657	E1	R757	C6	R1031	K7		
C216	M3	C616	B1	C916	B10	C1307	*K10	C1398	*J10	C1491	L10	E205	A9	R205	J1	R427	D12	R658	C1	R758	C6	R1032	K7		
C217	M4	C617	*C4	C917	B10	C1308	*J10	C1399	*K10	C1492	H10	E206	*M12	R206	H4	R428	C5	R659	C1	R759	C6	R1033	K7		
C218	N3	C618	*C3	C918	C10	C1309	*J10	C1400	*J10	C9001	*C9	E207	D2	R207	*J4	R429	C5	R660	C1	R760	C6	R1034	K7		
C219	N4	C619	*C4	C919	B10	C1310	*J10	C1401	*K10	C9002	*C8	E208	*H2	R208	*J4	R430	C4	R661	B1	R761	C6	R1035	K8		
C220	N4	C620	*C4	C920	C10	C1311	*K10	C1402	*J10	C9003	*C8	E209	M2	R209	*J4	R431	D4	R662	B1	R762	D6	R1036	J8		
C221	N4	C621	*C4	C921	C10	C1312	*J10	C1403	*K10	C9004	*C8	E210	*D6	R210	J1	R432	B4	R663	B12	R763	D6	R1037	J8		
C222	K3	C622	*C4	C922	C10	C1313	*K10	C1404	*J10	C9005	*C9	E901	B11	R211	M4	R433	D4	R664	B12	R764	D6	R1038	K8		
C223	K3	C623	*C4	C923	C10	C1314	*J10	C1405	*J10	C9006	*C8			R212	*N4	R434	D4	R665	B12	R765	D6	R1039	K8		
C224	K3	C624	*C4	C924	C10	C1315	*K10	C1406	*J10	C9007	*C8	F1	A12	R213	*N4	R435	C4	R666	B12	R766	D6	R1040	K8		
C225	K3	C625	*C4	C925	C10	C1316	*J10	C1407	*K10	C9008	*C9	F201	H3	R214	*N4	R436	B4	R667	B12	R767	D6	R1041	K8		
C226	K3	C626	*C4	C926	C10	C1317	*K10	C1408	*K10	C9009	*C8	F202	M3	R215	*N4	R437	C4	R668	B12	R768	D6	R1042	*H10		
C227	K4	C627	*C3	C927	C10	C1318	*J10	C1409	*K10	C9010	C7	F203	K3	R216	K1	R438	C4	R669	B12	R769	D6	R1043	*H10		
C228	L3	C628	B12	C928	C10	C1319	*K10	C1410	*J10			F204	F3	R217	K4	R439	C4	R670	B12	R770	*C6	R1044	*H10		
C229	L4	C629	B12	C929	D10	C1320	*J10	C1411	*K10	CL401	C5			R218	*L4	R440	B4	R671	B12	R771	*C6	R1045	*H10		
C230	L4	C630	*C3	C930	D10	C1321	*K10	C1412	*J10	CL402	C5	FB301	D6	R219	*L4	R441	C3	R672	B12	R772	*C8	R1046	*H10		
C231	L4	C631	*C4	C931	D10	C1322	*K10	C1413	*J10	CL403	C5	FB302	E8	R220	*L4	R442	C3	R673	B12	R773	*C8	R1047	*H10		
C232	F3	C632	*C4	C932	D10	C1323	*K10	C1414	*J10	CL404	C5	FB401	B7	R221	*L4	R443	C4	R674	B12	R774	*C8	R1048	D4		
C233	F3	C633	*C4	C933	C7	C1324	*J11	C1416	*J10	CL405	C5	FB601	*C3	R222	K1	R444	C4	R675	B12	R775	*C8				
C234	F3	C634	*C4	C934	B8	C1325	*K10	C1417	*J9	CL406	C5	FB901	B11	R223	F4	R445	B4	R676	B12	R776	*C8	RB1001	D4		
C235	F3	C635	*C4	C935	*D8	C1326	*K10	C1418	*J10	CL601	B3	FB902	*D8	R224	*F4	R446	D4	R677	B12	R777	*C8	RB1002	D4		
C236	F3	C636	*C4	C936	*C8	C1327	*K10	C1420	*J10	CL602	B3			R225	*F4	R447	C4	R678	B12	R778	*C8	RB401	C5		
C237	F4	C637	*C4	C937	*C8	C1328	*J11	C1421	*J9	CL603	C3	IC302	C6	R226	*G4	R448	C4	R679	B12	R779	*C8	RB402	C5		
C238	G4	C638	*C4	C938	*C8	C1329	*K10	C1422	*J10	CL604	C3	IC303	F2	R227	*G4	R449	B4	R680	*C3	R780	*C8	RB403	C3		
C239	G4	C639	*C4	C939	*C8	C1330	*K10	C1423	*J9	CL605	C3	IC304	F2	R228	L1	R450	D4	R681	*C3	R781	*C8	RB404	C3		
C240	G4	C640	*C4	C940	*C8	C1331	*K9	C1424	*J10	CL801	B8	IC305	E8	R305	K1	R451	D4	R682	E1	R782	*C8	RB405	C3		
C306	D6	C641	*C4	C941	*C8	C1332	*J11	C1425	*J9	CL802	B8	IC401	C4	R309	D5	R452	C4	R683	C3	R783	*C8	RB406	C3		
C307	D6	C642	*C4	C942	*C8	C1333	*J10	C1426	*J10	CL803	B8	IC402	A11	R310	C6	R453	B4	R684	*C4	R801	*C8	RB407	D3		
C308	D6	C643	B12	C943	*C8	C1334	*J10	C1427	*J10	CL804	D8	IC403	B6	R311	C5	R501	*C8	R685	*C3	R802	*C9	RB408	D3		
C309	C6	C644	C3	C944	*C8	C1335	*K9	C1428	*J10	CL805	D8	IC404	B6	R312	C5	R502	*B8	R686	C3	R803	*B8	RB409	D3		
C310	C6	C645	*C4	C945	*C8	C1336	*J11	C1429	*J9	CL806	D8	IC405	D12	R313	C6	R503	D4	R687	*C4	R812	*C8	RB410	D4		
C311	F2	C701	C6	C946	*C8	C1337	*K10	C1430	*J10	CL807	D8	IC501	*C12	R314	C5	R504	D3	R688	*C4	R813	*C8	RB411	D3		
C312	F2	C702	C6	C947	*C8	C1338	*J10	C1431	*J9	CL808	D8	IC502	*C12	R315	E2	R505	D3	R689	*C4	R814	*C8	RB412	D3		
C313	E8	C703	C6	C948	*C8	C1339	*K9	C1432	*J10	CL809	D8	IC503	D3	R316	F2	R506	D3	R690	*C4	R815	*C8	RB413	D3		
C314	E8	C704	C6	C949	*C8	C1340	*J11	C1433	*J9	CL810	D8	IC601	B12	R317	E2	R507	D3	R691	C3	R816	*D8	RB414	D4		
C315	E8	C705	C6	C950	*C8	C1341	*K10	C1434	*J10	CL811	D8	IC602	F1	R318	F2	R601	B4	R701	C1	R817	*D8	RB415	D3		
C316	E8	C706	D6	C951	*C8	C1342	*J10	C1435	*J9	CL812	D8	IC603	C3	R319	F2	R602	C4	R702	C1	R818	*D8	RB501	*C12		
C317	E8	C707	C6	C952	*C9	C1343	*K9	C1436	*J10	CL813	D8	IC604	B1	R320	F2	R603	*E1	R703	C1	R819	*D8	RB502	*C12		
C401	A7	C708	C6	C953	*C8	C1344	*J11	C1437	*J9	CL814	D8	IC605	B12	R321	F1	R604	C4	R704	C1	R820	D8	RB503	*C12		
C402	A6	C709	D6	C954	*C8	C1345	*K10	C1438	*J10	CL815	D8	IC606	B12	R322	L1	R605	C3	R705	C1	R821	D8	RB504	*C12		
C403	B6	C710	D6	C955	*C8	C1346	*J10	C1439	*J10	CL816	D8	IC607	B12	R323	L1	R606	*E1	R706	C1	R901	B11	RB505	*C12		
C404	B6	C711	D6	C956	*C8	C1347	*K10	C1440	*J10			IC701	C6	R324	F2	R607	*E1	R707	C1	R902	C11	RB506	*C12		
C405	B11	C801	D9	C957	*C8	C1348	*J10	C1441	*J10	CN701	C1	IC702	C6	R325	F2	R608	*E1	R708	C1	R903	D11	RB507	*B12		
C406	B11	C802	C9	C958	*C8	C1349	*K10	C1442	*J10	CN1001	J7	IC703	C6	R326	F2	R609	C3	R709	C3	R904	B11	RB508	*C12		
C407	B10	C803	C9	C959	*C8	C1350	*J10	C1443	*J10			IC801	C8	R327	F1	R610	B12	R710	C3	R905	B11	RB509	C12		
C408	B10	C804	C9	C960	*C8	C1351	*K10	C1444	*K11	CNB1	B12	IC901	B11	R328	K1	R611	B12	R711	*C3	R906	C11	RB510	C12		
C409	A10	C805	C9	C961	*C8	C1352	*J10	C1445	*J10			IC902	C11	R329	K1	R612	C4	R712	*C3	R907	C11	RB511	C12		
C410	A11	C806	C9	C962	*C8	C1353	*K10	C1446	*K11	CNC1	C12	IC903	D11	R330	G2	R613	C4	R713	B4	R908	C11	RB512	C12		
C411	A10	C807	C9	C963	*C8	C1354	*K10	C1447	*J10			IC1001	K10	R331	G2	R614	C4	R714	B4	R909	D11	RB513	C12		
C412	B10	C808	C9	C964	*C8	C1355	*K10	C1448	*K11	CND1	D12	IC1002	B3	R332	F2	R615	C3	R715	C4	R910	D11	RB514	C12		
C413	B11	C809	*B8	C965	*C8	C1356	*J10	C1449	*J10					R333	F1	R616	*C4	R716	*C3	R911	D11	RB515	B12		
C414	B11	C810	D9	C966	*C8	C1357	*K10	C1450	*K11	CNE1	E12	L901	B10	R334	K1	R617	C4	R717	*C3	R912	B11	RB516	C12		
C415	B11	C811	D9	C967	*C8	C1358	*K10	C1451	*J10			L902	B10	R335	K1	R618	C4	R718	C4	R913	B11	RB517	*C12		
C416	B11	C812	C9	C968	*C8	C1359	*K10	C1452	*K11	CNG1	G12	L903	C10	R336	F2	R619	C4	R719	C4	R914	C11	RB518	*C12		
C417	B11	C813	C9	C969	*C8	C1360	*J10	C1453	*K11			L904	B10	R337	F2	R620	C4	R720	C4	R915	D11	RB519	*C12		
C418	A11	C814	C9	C970	*C8	C1361	*K10	C1454	*K11	CNJ1	J12	L905	C10	R338	F2	R621	C4	R721	*B8	R916	*C9	RB520	*B12		
C419	A11	C815	C9	C971	*C8	C1362	*J10	C1455	*K10			L906	C10	R339	F1	R622	C4	R722	*B8	R917	*C9	RB521	*C12		
C420	A11	C816	C9	C972	*C8	C1363	*K10	C1456	*K11	CNK1	K12	L907	C10	R340	J1	R623	C4	R723	*B8	R918	*B8	RB522	*C12		
C421	A11	C817	C9	C973	*C8	C1364	*J10	C1457	*K10			L908	C10	R341	J1	R624	C4	R724	*B8	R919	*B8	RB523	*C12		
C422	A11	C818	C9	C974	*C8	C1365	*K10	C1458	*K10	CNL1	L12	L909	C10	R342	E8	R625	C4	R725	*B8	R920	*C8	RB524	*C12		
C423	A11	C819	C9	C975	*C8	C1366	*J10	C1459	*K10			L910	C10	R343	E8	R626	C4	R726	*B8	R921	*C8	RB601	E1		
C424	A11	C820	C9	C976	*C8	C1367	*K10	C1460	*K11	CNN1	N12	L911	C10	R344	E8	R627	C4	R727	C6	R1001	D4	RB602	B4		
C425	A11	C821	C9	C977	*C8	C1368	*J10	C1461	*K10			L912	C10	R345	E8	R628	C4	R728	C6	R1002	D4	RB603	B4		
C426	A11	C822	C9	C978	*C8	C1369	*K10	C1462	*K11	CNP1	P12	L913	C10	R346	E8	R629	C4	R729	C6	R1003	D4	RB604	C3		
C427	A11	C823	C9	C979	*C8	C1370	*J10	C1463	*K10			L914	D10	R347	J1	R630	C4	R730	C6	R1004	D4	RB605	C3		
C428	A11	C824	C9	C980	*C8	C1371	*K10	C1464	*K11	D201	F4	L915	D10	R348	E8	R631	C4	R731	C6	R1005	D4	RB606	B4		
C429	D12	C825	C9	C981	*C8	C1372	*J10	C1465	*K10	D202	A12	L916	D10	R401	B6	R632	C4	R732	C6	R1006	D4	RB607	B4		
C501	*C12	C826	C9	C982	*C8	C1373	*K10	C1466	*K11	D203	J1	L917	D10	R402	B6	R633	C4	R733	C6	R1007	D4				
C502	*B12	C827	C9	C983	D8	C1374	*J10	C1467	*K10	D301	K1	L918	*D8	R403	B6	R634	*C4	R734	C6	R1008	D4	S601	E1		
C503	*C12	C828	C9	C984	*D8	C1375	*K10	C1468	*K10	D303	L1			R404	B4	R635	*C4	R735	*C8	R1009	D4	S602	F1		
C504	*C12	C829	C9	C985	*C9	C1376	*J11	C1469	*K10	D304	K1	Q201	F4	R405	B4	R636	*C4	R736	*C8	R1010	D4				
C505	*C12	C830	C9	C986	*C8	C1377	*K10	C1470	*K10	D305	K1	Q202	H4	R406	B4	R637	*C4	R737	*C8	R1011	D4	SORI01	A6		
C506	*C12	C831	C9	C987	*C9	C1378	*J10	C1471	*K10	D306	J1	Q203	M4	R407	B4	R638	*C4	R738	*C8	R1012	D4	SORI02	R6		
C507	*C12	C832	B9	C988	*C9	C1379	*K9	C1472	*K10	D401	B10	Q204	K4	R408	B4	R639	C3	R739	D6	R1013	D4				
C508	*C12	C833	B9	C989	*C9	C1380	*J11	C1473	*K10	D616	E1	Q205	F4	R409	B10	R640	C3	R740	D6	R1014	D4	TP201	E4		
C509	*C8	C834	B10	C990	*C8	C1381	*K10	C1474	*K10	D617	E1	Q301	K1	R410	A11	R641	C4	R741	D6	R1015	D4	TP202	J1		
C510	D4	C835	B10	C991	*C8	C1382	*K10	C1475	*K10	D618	C1	Q302	C6	R411	A11	R642	C4	R742	D6	R1016	D4	TP203	J1		

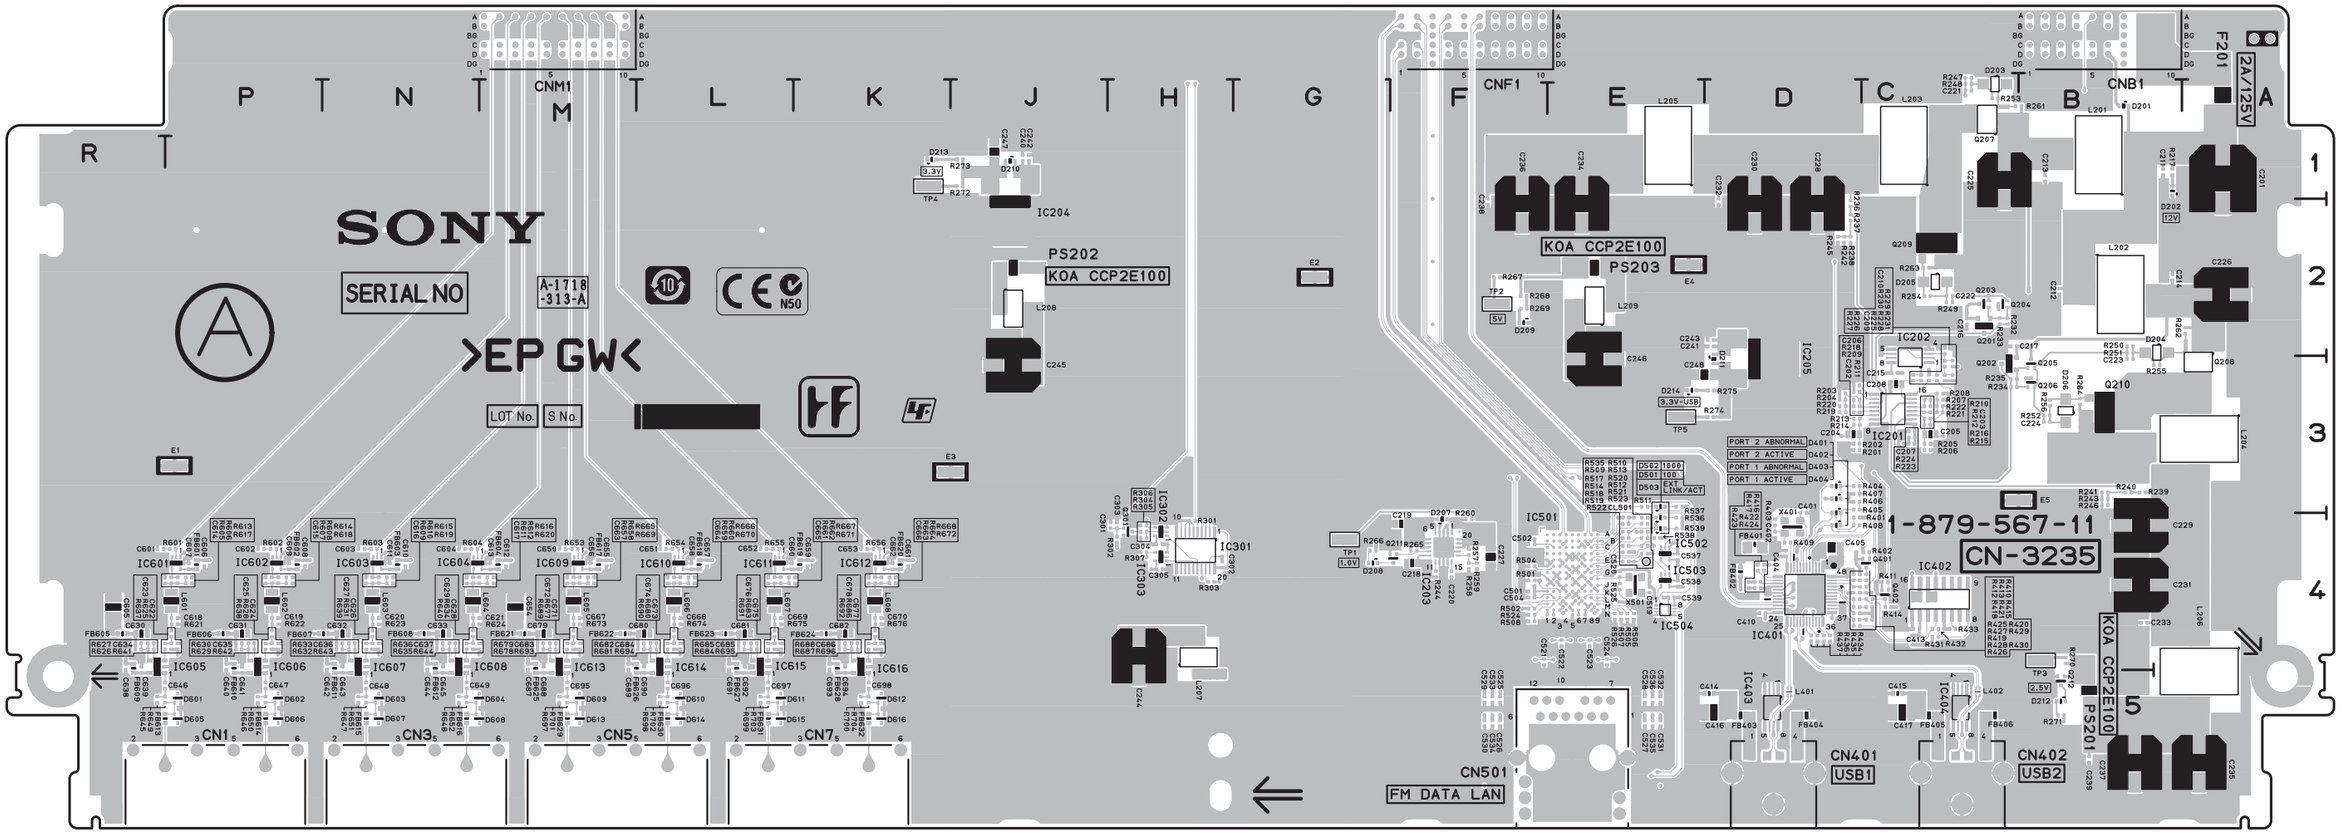

CN-3235 -A SIDE-

SUFFIX: -11

CN-3235 (1-879-567-11)
---

*:B SIDE

		C235	A5	C417	C5	C535	E5	C631	P4	C666	K4			D603	N5
C201	A1	C236	F2	C501	F4	C536	E5	C632	N4	C667	M4	CN1	P5	D604	N5
C202	D3	C237	B5	C502	F4	C537	E4	C633	N4	C668	L4	CN3	N5	D605	P5
C203	C3	C238	F2	C503	*E4	C538	E4	C634	R4	C669	L4	CN5	M5	D606	P5
C204	D3	C239	B5	C504	F4	C539	E4	C635	P4	C670	K4	CN7	K5	D607	N5
C205	C3	C240	J1	C505	*E4	C601	R4	C636	N4	C671	M4	CN401	D5	D608	N5
C206	D3	C241	D2	C506	*E4	C602	P4	C637	N4	C672	M4	CN402	C5	D609	M5
C207	C3	C242	J1	C507	*E4	C603	N4	C638	R4	C673	L4	CN501	F5	D610	L5
C208	C3	C243	D2	C508	*E4	C604	N4	C639	R5	C674	L4	CNB1	B1	D611	L5
C209	C3	C244	H4	C509	*E4	C605	R4	C640	P4	C675	L4	CNF1	F1	D612	K5
C210	C2	C245	J3	C510	*E4	C606	P4	C641	P5	C676	L4	CNM1	M1	D613	M5
C211	B1	C246	E3	C511	*E4	C607	P4	C642	N4	C677	K4			D614	L5
C212	B2	C247	J1	C512	*E4	C608	P4	C643	N5	C678	K4	D201	B1	D615	L5
C213	B1	C248	E3	C513	*E4	C609	P4	C644	N4	C679	M4	D202	B1	D616	K5
C214	B2	C301	H4	C514	*F4	C610	N4	C645	N5	C680	L4	D203	C1		
C215	C3	C302	H4	C515	*E4	C611	N4	C646	R5	C681	L4	D204	B2	E1	P3
C216	C2	C303	H4	C516	*E4	C612	M4	C647	P5	C682	K4	D205	C2	E2	G2
C217	C2	C304	H4	C517	*E4	C613	M4	C648	N5	C683	M4	D206	B3	E3	K3
C218	F4	C305	H4	C518	*E4	C614	R4	C649	N5	C684	L4	D207	F4	E4	E2
C219	F4	C401	D4	C519	E4	C615	P4	C650	M4	C685	L4	D208	G4	E5	C3
C220	F4	C402	D4	C520	E4	C616	N4	C651	L4	C686	K4	D209	F2		
C221	C1	C403	*D4	C521	F4	C617	N4	C652	L4	C687	M4	D210	J1	F201	A1
C222	C2	C404	D4	C522	E4	C618	P4	C653	K4	C688	M5	D211	D3		
C223	B3	C405	D4	C523	E4	C619	P4	C654	M4	C689	M4	D212	B5	FB401	D4
C224	B3	C406	*D4	C524	E4	C620	N4	C655	M4	C690	L5	D213	K1	FB402	D4
C225	C1	C407	*D4	C525	F5	C621	N4	C656	M4	C691	L4	D214	E3	FB403	D5
C226	A2	C408	*D4	C526	F5	C622	P4	C657	L4	C692	L5	D401	D3	FB404	D5
C227	F4	C409	*D4	C527	E5	C623	P4	C658	L4	C693	K4	D402	D3	FB405	C5
C228	D2	C410	D4	C528	E5	C624	P4	C659	K4	C694	K5	D403	D4	FB406	C5
C229	B4	C411	*D4	C529	F5	C625	P4	C660	L4	C695	M5	D404	D4	FB501	*F4
C230	D2	C412	*D4	C530	F5	C626	N4	C661	K4	C696	L5	D501	E4	FB502	*E4
C231	B4	C413	C4	C531	E5	C627	N4	C662	K4	C697	L5	D502	E3	FB601	P4
C232	D2	C414	D5	C532	E5	C628	N4	C663	M4	C698	K5	D503	E4	FB602	P4
C233	B4	C415	C5	C533	F5	C629	N4	C664	L4			D601	P5	FB603	N4
C234	E2	C416	D5	C534	F5	C630	R4	C665	L4	CL501	E4	D602	P5	FB604	M4

FB605	R4	IC302	H4	L209	E2	R204	D3	R239	B3	R274	D3	R427	D4	R521	E4
FB606	P4	IC303	H4	L401	D5	R205	C3	R240	B3	R275	D3	R428	D4	R522	E4
FB607	N4	IC401	D4	L402	C5	R206	C3	R241	B3	R301	H4	R429	C4	R523	E4
FB608	N4	IC402	C4	L601	P4	R207	C3	R242	D2	R302	H4	R430	C4	R524	F4
FB609	R4	IC403	D5	L602	P4	R208	C3	R243	B3	R303	H4	R431	C4	R525	E4
FB610	P4	IC404	C5	L603	N4	R209	D3	R244	F4	R304	H4	R432	C4	R526	E4
FB611	N4	IC501	E4	L604	N4	R210	C3	R245	D2	R305	H4	R433	C4	R527	*F4
FB612	N4	IC502	E4	L605	M4	R211	D3	R246	B3	R306	H4	R434	D4	R528	*E4
FB613	R5	IC503	E4	L606	L4	R212	C3	R247	C1	R307	H4	R435	D4	R529	*E4
FB614	P5	IC504	E4	L607	L4	R213	D3	R248	C1	R401	D4	R436	D4	R530	*E4
FB615	N5	IC601	P4	L608	K4	R214	D3	R249	C2	R402	C4	R437	D4	R531	*E4
FB616	N5	IC602	P4			R215	C3	R250	B2	R403	D4	R438	*D4	R532	*E4
FB617	M4	IC603	N4	PS201	B5	R216	C3	R251	B2	R404	D3	R439	*D4	R533	*E4
FB618	L4	IC604	N4	PS202	J2	R217	B1	R252	B3	R405	D3	R440	*D4	R534	*E4
FB619	K4	IC605	R4	PS203	E2	R218	D3	R253	C1	R406	D3	R441	*D4	R535	E4
FB620	K4	IC606	P4			R219	D3	R254	C2	R407	D3	R501	F4	R536	E4
FB621	M4	IC607	N4	Q201	C2	R220	D3	R255	B3	R408	D4	R502	F4	R537	E3
FB622	M4	IC608	N4	Q202	C3	R221	C3	R256	B3	R409	D4	R503	*E4	R538	E4
FB623	L4	IC609	M4	Q203	C2	R222	C3	R257	F4	R410	C4	R504	F4	R539	E4
FB624	K4	IC610	L4	Q204	C2	R223	C3	R258	F4	R411	C4	R505	E4	R540	*E5
FB625	M4	IC611	L4	Q205	B3	R224	C3	R259	F4	R412	D4	R506	E4	R541	*F5
FB626	M4	IC612	K4	Q206	B3	R225	C3	R260	F4	R413	D4	R507	E4	R601	P4
FB627	L4	IC613	M4	Q207	C1	R226	C3	R261	C1	R414	C4	R508	F4	R602	P4
FB628	K4	IC614	L4	Q208	A3	R227	C3	R262	A2	R415	C4	R509	E4	R603	N4
FB629	M5	IC615	L4	Q209	C2	R228	C3	R263	C2	R416	D4	R510	E4	R604	N4
FB630	L5	IC616	K4	Q210	B3	R229	C3	R264	B3	R417	D4	R511	E3	R605	P4
FB631	L5			Q211	F4	R230	C3	R265	F4	R418	D4	R512	E4	R606	P4
FB632	K5	L201	B1	Q212	B5	R231	C3	R266	G4	R419	D4	R513	E4	R607	P4
		L202	B2	Q301	H4	R232	C2	R267	F2	R420	C4	R514	E4	R608	P4
IC201	C3	L203	C1	Q401	C4	R233	C2	R268	F2	R421	D4	R515	*E4	R609	N4
IC202	C3	L204	A3	Q402	C4	R234	C3	R269	F2	R422	D4	R516	*E4	R610	N4
IC203	F4	L205	E1			R235	C3	R270	B4	R423	D4	R517	E4	R611	N4
IC204	J2	L206	A5	R201	D3	R236	D2	R271	B5	R424	D4	R518	E4	R612	N4
IC205	D3	L207	H4	R202	D3	R237	D2	R272	J1	R425	D4	R519	E4	R613	P4
IC301	H4	L208	J2	R203	D3	R238	D2	R273	J1	R426	D4	R520	E4	R614	P4

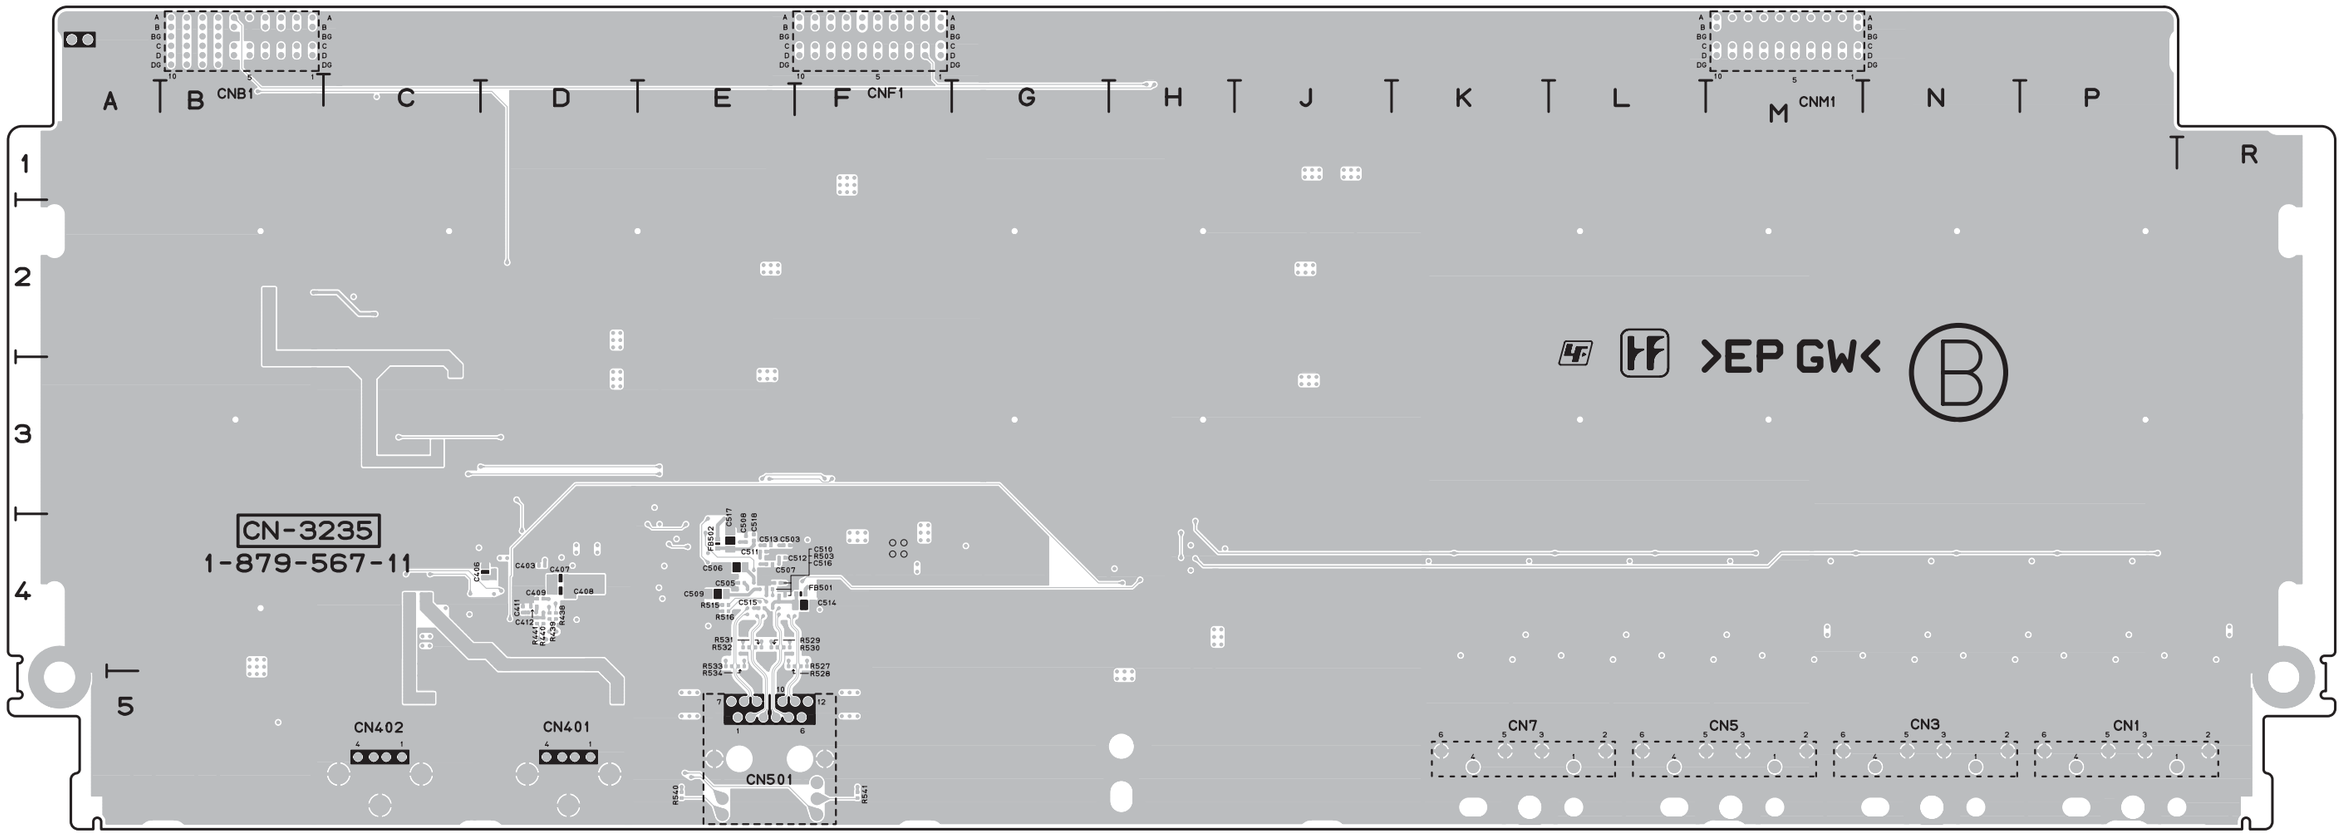

CN-3235 -B SIDE-
SUFFIX: -11

R615	N4	R649	R5	R677	M4		
R616	M4	R650	P5	R678	M4	X401	D4
R617	P4	R651	N5	R679	M4	X501	E4
R618	P4	R652	N5	R680	L4		
R619	N4	R653	M4	R681	L4		
R620	M4	R654	L4	R682	L4		
R621	P4	R655	L4	R683	L4		
R622	P4	R656	K4	R684	L4		
R623	N4	R657	M4	R685	L4		
R624	N4	R658	M4	R686	K4		
R625	P4	R659	L4	R687	K4		
R626	R4	R660		R688	K4		
R627	R4	L4		R689	M4		
R628	P4	R661		R690	L4		
R629	P4	L4		R691	L4		
R630	P4	R662		R692	K4		
R631	N4	L4		R693	M4		
R632	N4	R663		R694	L4		
R633	N4	K4		R695	L4		
R634	N4	R664		R696	K4		
R635	N4	K4		R697	M5		
R636	N4	R665		R698	L5		
R637	R4	M4		R699	L5		
R638	P4	R666	L4	R700	K5		
R639	N4	R667	L4	R701	M5		
R640	N4	R668	K4	R702	L5		
R641	R4	R669	M4	R703	L5		
R642	P4	R670	L4	R704	K5		
R643	N4	R671	L4				
R644	N4	R672	K4	TP1	G4		
R645	R5	R673	M4	TP2	F2		
R646	P5	R674	L4	TP3	B4		
R647	N5	R675	L4	TP4	K1		
R648	N5	R676	K4	TP5	E3		

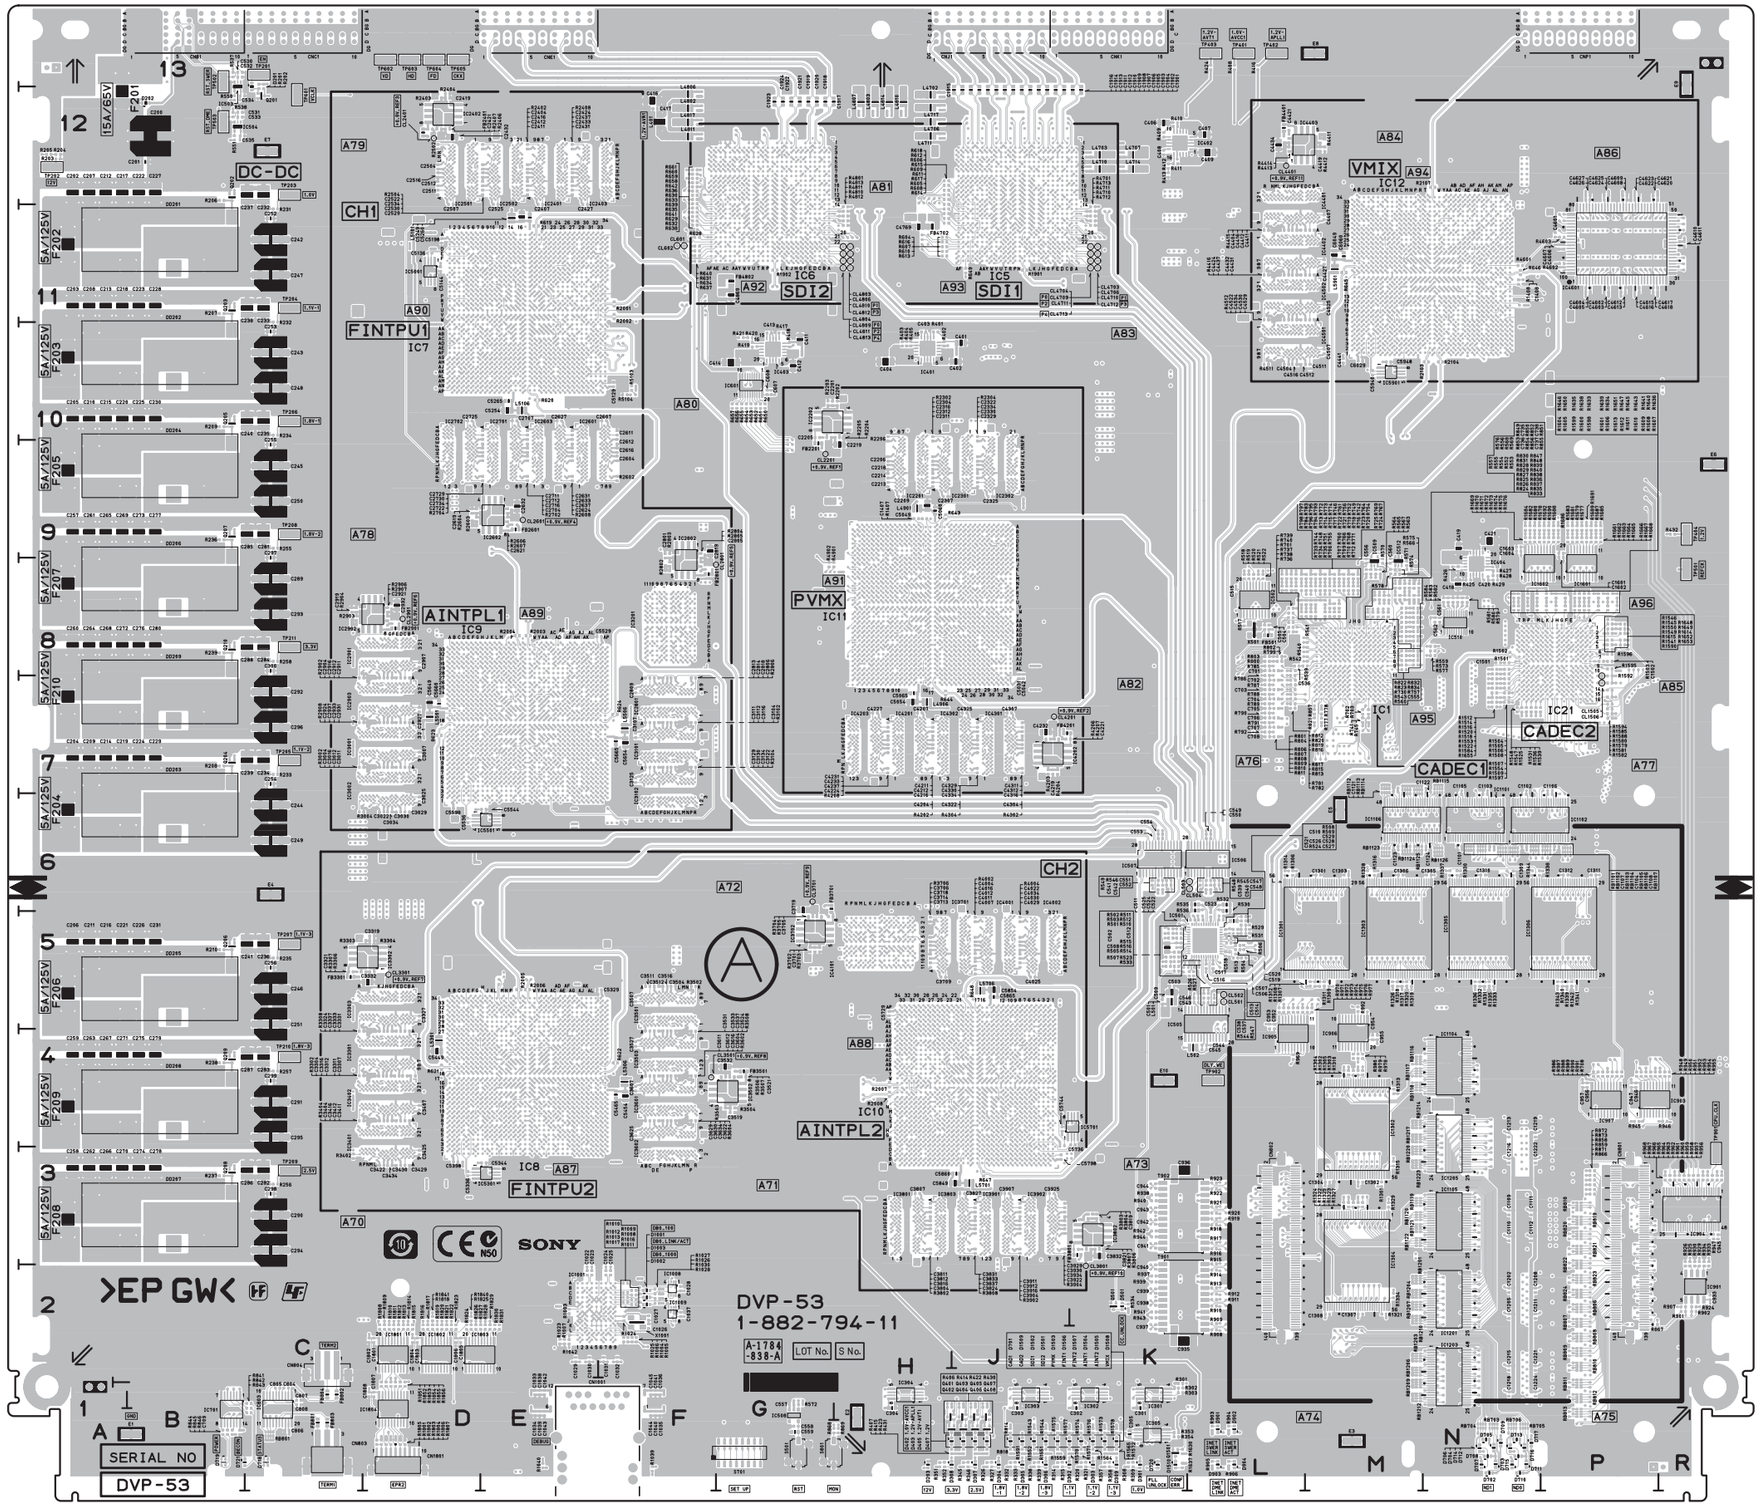

DVP-53 -A SIDE-
SUFFIX: -11

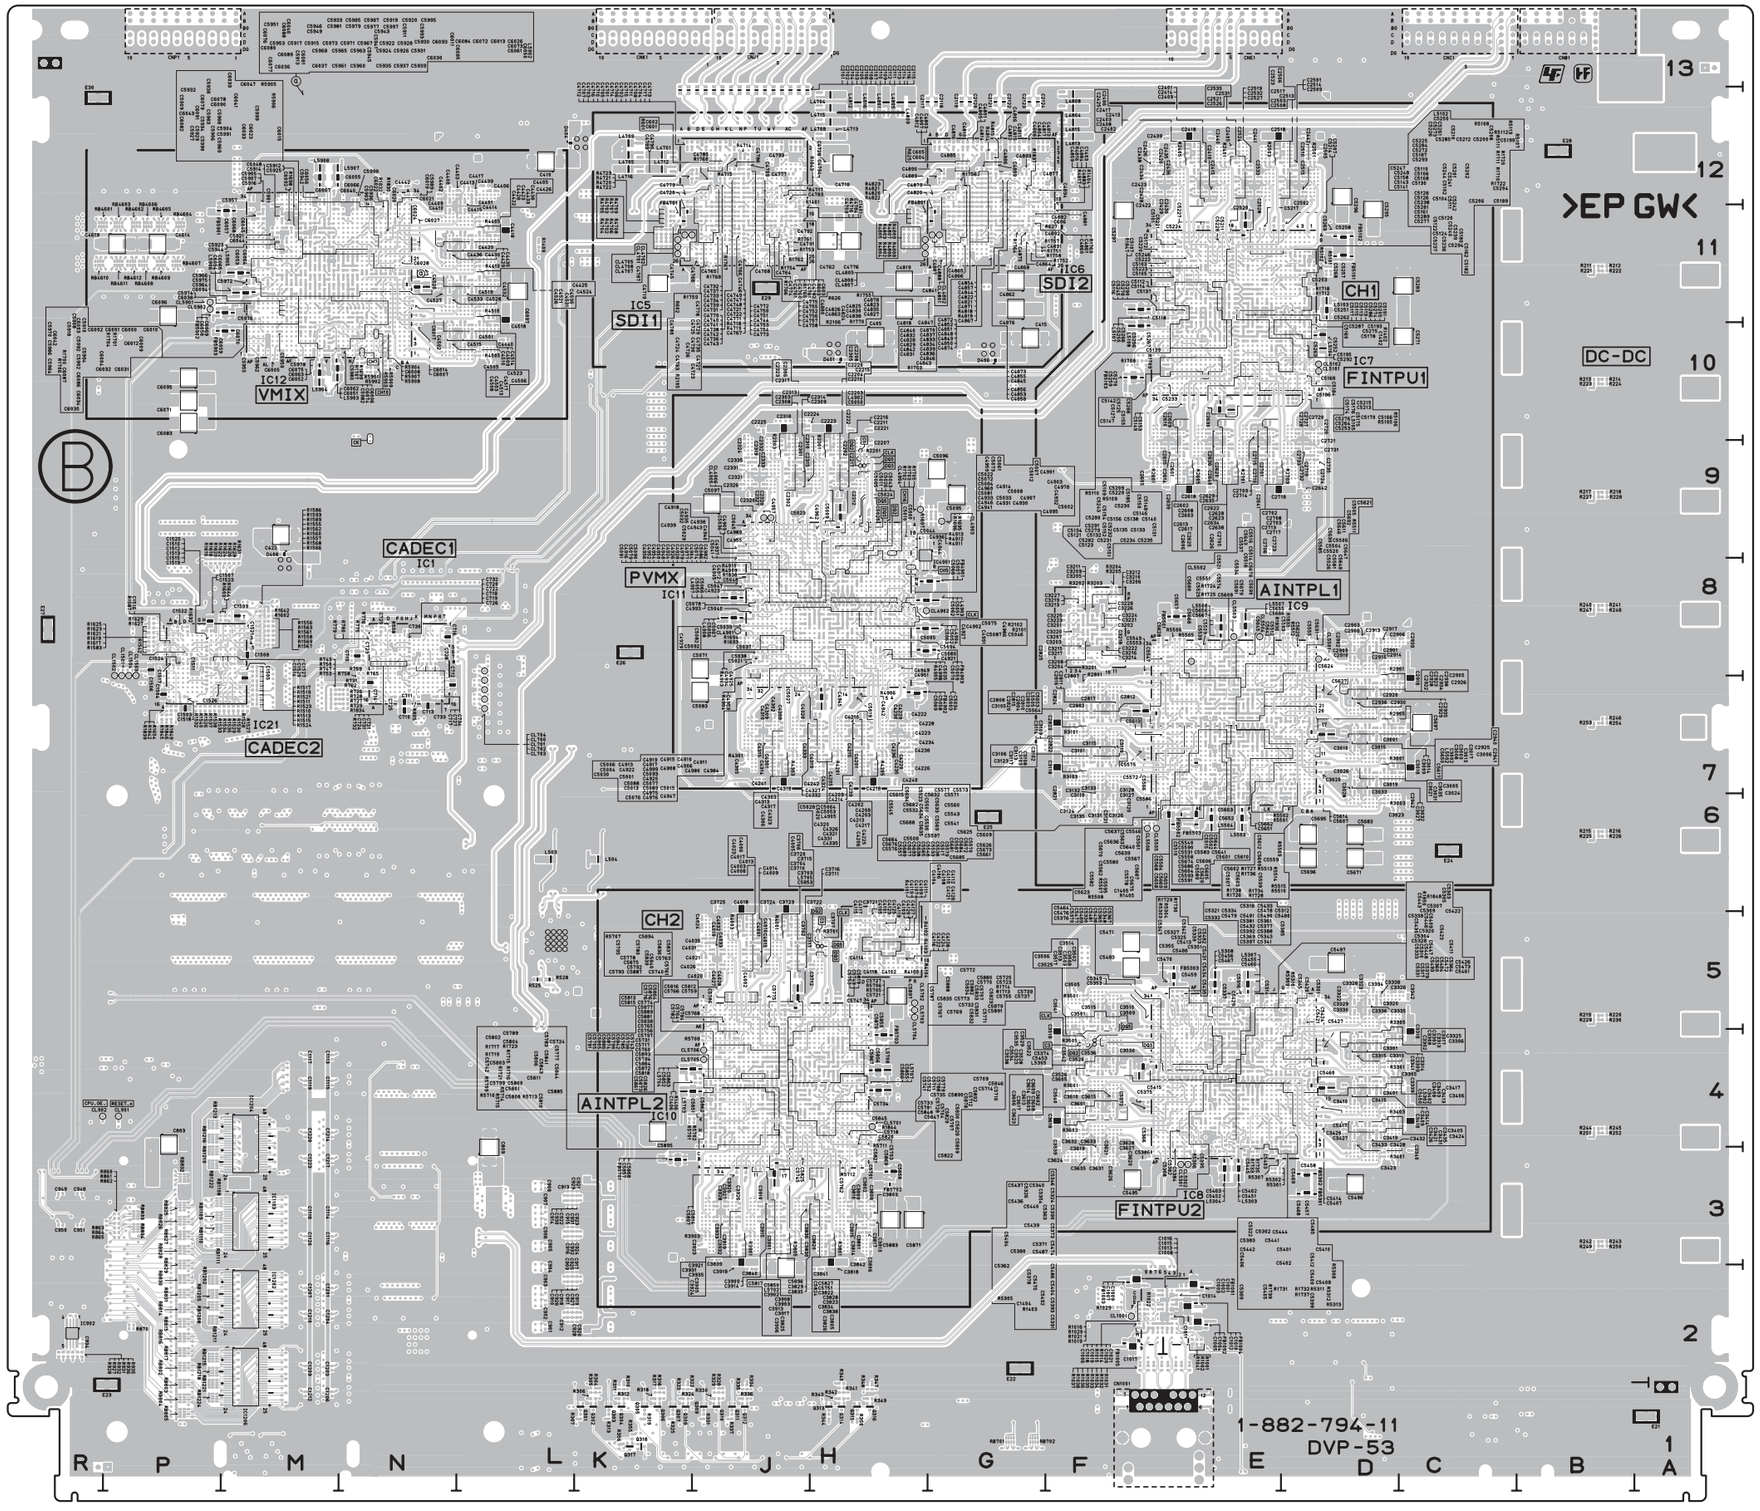

DVP-53 -B SIDE-
SUFFIX: -11

DVP-53 (1-882-794-11)
---
*:B SIDE

C200	B12	C298	C3	C607	G10	C952	L5	C1224	N1	C2115	*J12	C2429	*F12	C2708	*E10	C3004	D7	C3304	D4	C3525	*F4	C3821	K3	C4107	*H5	C4335	*H7	C4621	P12	C4792	*J11
C201	B12	C299	C4	C608	G10	C953	L5	C1301	M6	C2116	*J12	C2430	*E12	C2709	*E10	C3005	*D7	C3305	*D4	C3526	*F4	C3822	*H3	C4108	*H5	C4401	*L12	C4622	P12	C4793	*J12
C202	A12	C300	C8	C701	L8	C954	M4	C1302	M3	C2117	*G12	C2431	E12	C2710	*E10	C3006	*D7	C3306	*D4	C3527	F4	C3823	*H3	C4109	*H5	C4402	*M12	C4623	P12	C4794	*J12
C203	A11	C301	K1	C702	L7	C955	M4	C1303	M6	C2118	*G12	C2432	D12	C2711	E10	C3007	D7	C3307	D4	C3528	*F4	C3824	J3	C4110	*H5	C4403	*L12	C4624	P12	C4801	*G12
C204	A7	C302	K1	C703	L7	C956	P4	C1304	M3	C2119	*G12	C2433	E12	C2712	E9	C3008	*D7	C3308	*D4	C3529	*F4	C3825	*J3	C4111	*H5	C4404	L11	C4625	P12	C4802	*G12
C205	A10	C303	J1	C704	L7	C957	P4	C1305	N6	C2120	*G12	C2434	*F12	C2713	*E9	C3009	*D7	C3309	*D4	C3530	*F4	C3826	*H3	C4112	*H5	C4405	*L11	C4626	P12	C4803	*G12
C206	A5	C304	H1	C705	L7	C1001	*E2	C1306	M6	C2121	*G12	C2435	*F12	C2714	*E9	C3010	*D7	C3310	*D4	C3531	F4	C3827	J3	C4113	*H5	C4406	*L12	C4627	P12	C4804	*G12
C207	A12	C305	K1	C706	L7	C1002	*E2	C1307	M2	C2122	*G12	C2436	*E12	C2715	*E9	C3011	D7	C3311	D4	C3532	G4	C3828	*H3	C4114	*H5	C4407	M11	C4701	*J12	C4805	*G12
C208	A11	C401	J10	C707	L7	C1003	*E2	C1308	M2	C2123	*G12	C2437	E12	C2716	E9	C3012	D7	C3312	D4	C3533	F4	C3829	*H3	C4115	*H5	C4408	*M12	C4702	*J12	C4806	*G12
C209	A7	C402	J10	C708	L7	C1004	*E2	C1309	N6	C2124	*G12	C2438	*F12	C2717	*E9	C3013	*D7	C3313	*D4	C3534	*F4	C3830	*J3	C4116	*H5	C4409	*M12	C4703	*J12	C4807	*G12
C210	A10	C403	H10	C709	B1	C1005	*E2	C1310	N6	C2201	G10	C2439	*E12	C2718	*E9	C3014	*D7	C3314	*D4	C3535	*F4	C3831	J3	C4117	*H5	C4410	*M11	C4704	*J12	C4808	*G12
C211	A5	C404	H10	C710	*M7	C1006	*F2	C1311	P6	C2202	*H9	C2440	*E12	C2719	*D9	C3015	*D7	C3315	*D4	C3536	*F4	C3832	K3	C4118	*H5	C4411	M11	C4705	*J12	C4809	*G12
C212	A12	C405	*H10	C711	*M7	C1007	*F2	C1312	P6	C2203	*H9	C2441	*E12	C2720	*D10	C3016	D7	C3316	D4	C3537	F4	C3833	J3	C4119	*H5	C4412	L11	C4706	*J12	C4810	*G12
C213	A11	C406	K12	C712	*M7	C1008	*E2	C1401	*J11	C2204	*H9	C2442	*D12	C2721	*D9	C3017	*D7	C3317	*D4	C3538	*F4	C3834	*H3	C4120	*H5	C4413	*L12	C4707	*J12	C4811	*G12
C214	A7	C407	L12	C713	*M7	C1009	*F2	C1402	*D10	C2205	G10	C2501	*D12	C2722	E9	C3018	*C7	C3318	*C4	C3539	*F3	C3835	*H3	C4121	*H5	C4414	*L12	C4708	*J12	C4812	*G12
C215	A10	C408	K12	C714	*M7	C1010	*E2	C1403	*F11	C2206	H9	C2502	*D12	C2723	*E9	C3019	*D7	C3319	D5	C3540	*F4	C3836	*J3	C4122	*H5	C4415	*L11	C4709	*J12	C4813	*F12
C216	A5	C409	L12	C715	*M8	C1011	*E2	C1404	*E3	C2207	*H9	C2503	*E12	C2724	*D9	C3020	*D7	C3320	*D5	C3541	*F5	C3837	J3	C4123	*H5	C4416	L11	C4710	*J12	C4814	*G12
C217	A12	C410	*L12	C716	*M8	C1012	*E2	C1405	*E7	C2208	*H9	C2504	D12	C2725	D10	C3021	*D7	C3321	C5	C3542	*F4	C3838	*H3	C4124	*H5	C4417	*L12	C4711	*J12	C4815	*G12
C218	A11	C411	G10	C717	*M8	C1013	*E2	C1406	*J4	C2209	H9	C2505	*D12	C2726	*D10	C3022	D6	C3322	*D5	C3601	*F4	C3839	*J3	C4125	*H5	C4418	*L11	C4712	*K12	C4816	*G12
C219	A7	C412	G10	C718	*M8	C1014	*E2	C1407	H9	C2210	*H9	C2506	*D12	C2727	*D10	C3023	*D6	C3323	*D5	C3602	*F4	C3840	*J2	C4126	*H5	C4419	M12	C4713	*J12	C4817	*G12
C220	A10	C413	G10	C719	*M7	C1015	*E2	C1408	N11	C2211	*H9	C2507	D11	C2728	*D10	C3024	*D7	C3324	D4	C3603	*F4	C3841	*H2	C4127	*H5	C4420	*L11	C4714	*J12	C4818	*H11
C221	A5	C414	G10	C720	*M8	C1016	*E2	C1501	N8	C2212	*H9	C2508	*E12	C2729	E10	C3025	D6	C3325	*D4	C3604	F4	C3842	*H3	C4128	*H5	C4421	L12	C4715	*J12	C4819	*H11
C222	B12	C415	*G10	C721	*M8	C1017	*F2	C1502	P8	C2213	H9	C2509	*D12	C2730	E9	C3026	*D7	C3326	*D5	C3605	*F4	C3901	*J3	C4201	*H7	C4422	*M11	C4716	*J12	C4820	*G11
C223	B11	C416	F12	C722	*M8	C1018	*F2	C1503	*P7	C2214	H9	C2510	*D12	C2731	*D9	C3027	*D7	C3327	D5	C3606	*F4	C3902	*J3	C4202	*H7	C4423	*L11	C4717	*J12	C4821	*G11
C224	B7	C417	F12	C723	*M8	C1019	*F2	C1504	*P7	C2215	*H9	C2511	D12	C2732	*D9	C3028	*D7	C3328	*D5	C3607	F4	C3903	*J3	C4203	*H7	C4424	L11	C4718	*H12	C4822	*G11
C225	B10	C418	N8	C724	*M8	C1020	*E2	C1505	*N7	C2216	*H9	C2512	D12	C2733	*D9	C3029	D6	C3329	*D5	C3608	*F4	C3904	J3	C4204	H7	C4425	*L11	C4719	*K11	C4823	*G11
C226	B5	C419	N9	C725	*M7	C1021	*E2	C1506	*P8	C2217	*H9	C2513	*D12	C2734	E9	C3030	D6	C3330	*D5	C3609	*F4	C3905	*J3	C4205	*H7	C4426	*L11	C4720	*K11	C4824	*G11
C227	B12	C420	N8	C726	*M7	C1022	E2	C1507	*P8	C2218	H9	C2514	*D12	C2735	*D9	C3031	*D7	C3331	D4	C3610	*F4	C3906	*J3	C4206	*H7	C4427	M11	C4721	*J11	C4825	*G11
C228	B11	C421	N9	C727	*M8	C1023	E2	C1508	*N8	C2219	H9	C2515	*D12	C2801	F9	C3032	*D7	C3332	D5	C3611	F4	C3907	J3	C4207	H7	C4428	*M11	C4722	*J11	C4826	*G11
C229	B7	C422	*N9	C728	*M8	C1024	F2	C1509	*N8	C2220	*H9	C2516	D12	C2802	*F7	C3033	*D7	C3333	D4	C3612	F4	C3908	*J3	C4208	*H7	C4429	*M11	C4723	*J11	C4827	*G11
C230	B10	C501	K5	C729	*M8	C1025	F2	C1510	*P8	C2221	*H10	C2517	*E12	C2803	*F7	C3034	D6	C3334	*D5	C3613	*F4	C3909	*J3	C4209	*H7	C4430	*M11	C4724	*J11	C4828	*G12
C231	B5	C502	K5	C730	*M8	C1026	F2	C1511	*P8	C2222	*H10	C2518	*E12	C2804	*F7	C3035	*D7	C3335	*D5	C3614	*F4	C3910	*J3	C4210	*H7	C4431	M11	C4725	*J11	C4829	*G11
C232	C12	C503	K5	C731	*M8	C1027	F2	C1512	*P8	C2223	*H10	C2519	*E12	C2805	F8	C3101	*F7	C3336	*D5	C3615	*F4	C3911	J3	C4211	H7	C4432	L11	C4726	*J11	C4830	*G11
C233	C11	C504	L8	C732	*M8	C1028	F2	C1513	*P8	C2224	*J10	C2520	*E12	C2806	F7	C3102	*F7	C3337	D4	C3616	F4	C3912	J3	C4212	H7	C4433	*L11	C4727	*J11	C4831	*G11
C234	C7	C505	L8	C733	*M7	C1029	E2	C1514	*P8	C2225	*J10	C2521	*E12	C2807	*F7	C3103	*F7	C3338	*D5	C3617	*F4	C3913	*J3	C4213	*H7	C4434	L12	C4728	*H12	C4832	*G12
C235	C10	C506	L5	C734	*M8	C1030	E2	C1515	*P7	C2301	*J9	C2522	E12	C2808	*F7	C3104	F7	C3339	*C4	C3618	*F4	C3914	*J3	C4214	*H7	C4435	*L11	C4729	*J11	C4833	*G12
C236	C5	C507	L5	C735	M8	C1031	F2	C1516	*P8	C2302	*J9	C2523	*E12	C2809	F7	C3105	*F7	C3340	*C3	C3619	*F3	C3915	*J3	C4215	*H7	C4436	*L11	C4730	*J11	C4834	*G11
C237	C12	C508	K5	C736	M8	C1032	F2	C1517	*P8	C2303	*J9	C2524	*E12	C2810	*F7	C3106	*F7	C3341	*C4	C3620	*F3	C3916	J3	C4216	H7	C4437	L11	C4731	*J11	C4835	*G11
C238	C11	C509	K5	C737	M8	C1033	E1	C1518	*P7	C2304	H9	C2525	E11	C2811	*F7	C3107	F7	C3342	*C5	C3621	*F3	C3917	*J3	C4217	*H7	C4438	*L11	C4732	*J12	C4836	*G11
C239	C7	C510	L5	C738	M8	C1034	E1	C1519	*P7	C2305	*H9	C2526	*E12	C2812	*F7	C3108	*F7	C3401	*D4	C3622	F4	C3918	*J3	C4218	*H7	C4439	*L12	C4733	*J12	C4837	*G12
C240	C10	C511	K5	C803	*P4	C1035	F1	C1520	*N8	C2306	*J9	C2527	*E12	C2813	F7	C3109	*F7	C3402	*D4	C3623	*F4	C3919	*J3	C4219	J7	C4440	*L10	C4734	*J11	C4838	*G11
C241	C5	C512	K5	C804	C1	C1036	F1	C1521	*N8	C2307	H9	C2528	*E12	C2814	F7	C3110	*F7	C3403	*D4	C3624	*F3	C3920	*J3	C4220	*H7	C4441	M10	C4735	*J11	C4839	*G11
C242	C11	C513	K5	C805	C1	C1037	F2	C1522	*P8	C2308	*J9	C2529	E12	C2815	*F7	C3111	F7	C3404	D4	C3625	F4	C3921	*J3	C4221	J7	C4442	*M12	C4736	*J11	C4840	*G12
C243	C10	C514	L5	C806	C1	C1038	E1	C1523	*P8	C2309	*J9	C2530	E12	C2816	*F7	C3112	F7	C3405	*D4	C3626	*F3	C3922	J3	C4222	*H7	C4501	*L10	C4737	*J12	C4841	*G11
C244	C6	C515	L8	C807	C1	C1039	E1	C1524	*P8	C2310	*J9	C2531	*E12	C2817	*F7	C3113	*F7	C3406	*D4	C3627	*F3	C3923	*J3	C4223	*H7	C4502	*M10	C4738	*J11	C4842	*G11
C245	C9	C516	L5	C808	C1	C1040	F1	C1525	*P8	C2311	H9	C2532	*E12	C2818	F7	C3114	*F7	C3407	D4	C3628	*F4	C3924	*J3	C4224	H7	C4503	*L11	C4739	*J11	C4843	*G11
C246	C5	C517	L5	C809	*L3	C1041	F1	C1526	*N7	C2312	H9	C2533	*E12	C2819	F9	C3115	*F7	C3408	*D4	C3629	F4	C3925	J3	C4225	*H7	C4504	L10	C4740	*J12	C4844	*G12
C247	C11	C518	L5	C901	*L2	C1042	E1	C1527	*N8	C2313	*J9	C2534	E12	C2820	*F7	C3116	F7	C3409	*C4	C3630	F4	C3926	*J3	C4226	*H7	C4505	*L10	C4741	*J12	C4845	*G12
C248	C10	C519	L5	C902	*L2	C1043	E1	C1601	P9	C2314	*J9	C2535	*E12	C2821	*F7	C3117	*F7	C3410	*D4	C3631	*F3	C3927	*J3	C4227	H7	C4506	*L10	C4742	*J11	C4846	*G11
C249	C6	C520	L5	C903	*L2	C1044	F1	C1602	P9	C2315	*J9	C2601	*E9	C2822	*F7	C3118	*F7	C3411	D4	C3632	*F3	C3928	*J3	C4228	*H7	C4507	M10	C4743	*J11	C4847	*G11
C250	C9	C521	L5	C904	*L2	C1045	F1	C1603	N9	C2316	H9	C2602	*E10	C2823	*F7	C3119	*F6	C3412	D4	C3633	*F4	C3929	J3	C4229	*H7	C4508	*M11	C4744	*J12	C4848	*G12
C251	C5	C522	L5	C905	*L3	C1101	N6	C1604	N9	C2317	*J9	C2603	*E9	C2824	*F7	C3120	*F6	C3413	*D4	C3634	F4	C3930	J3	C4230	*H7	C4509	*M10	C4745	*K11	C4849	*G11
C252	C11	C523	L5	C906	*L3	C1102	N6	C1801	D2	C2318	*J10	C2604	F9	C2825	*F8	C3121	*F6	C3414	*D4	C3635	*F3	C3931	*J3	C4231	H7	C4510	*M10	C4746	*J11	C4850	*G11
C253	C10	C524	L5	C907	*L3	C1103	N6	C1802	D2	C2319	*J9	C2605	*F9	C2901	*D8	C3122	F7	C3415	*D4	C3701	G5	C3932	*J3	C4232	J7	C4511	M10	C4747	*J12	C4851	*G12
C254	C7	C525	L5	C908	*L3	C1104	N6	C1803	D2	C2320	*J9	C2606	*E9	C2902	*D8	C3123	*F7	C3416	D4	C3702	*J5	C3933	*J3	C4233	H7	C4512	L10	C4748	*J12	C4852	*G12
C255	C9	C526	L5	C909	*L2	C1105	N6	C1804	D2	C2321	*J9	C2607	F10	C2903	*D8	C3124	*F6	C3417	*D4	C3703	*J5	C3934	J3	C4234	*H7	C4513	*L10	C4749	*J12	C4853	*G11
C256	C5	C527	L5	C910	*L2	C1106	P6	C1805	D2	C2322	J9	C2608	*E10	C2904	D7	C3125	F7	C3418	*C4	C3704	*J5	C3935	*J3	C4235	*H7	C4514	*L10	C4750	*J12	C4854	*G12
C257	A9	C528	L5	C911	*L2	C1107	N6	C1806	D2	C2323	*J9	C2609	*E10	C2905	*D7	C3126	*F6	C3419	*D4	C3705	G5	C4001	*J5	C4236	*H7	C4515	*L10	C4751	*J12	C4855	*G12
C258	A3	C529	L5	C912	*L2	C1108	P6	C1807	D1	C2324	*J9	C2610	*E10	C2906	*D8	C3127	*F6	C3420	*D4	C3706	H5	C4002	*J5	C4237	H7	C4516	L10	C4752	*J12	C4856	*G11
C259	A4	C530	B13	C913	*L3	C1109	N3	C1808	D1	C2325	J9	C2611	F10	C2907	D8	C3128	*F7	C3421	*D4	C3707	*H5	C4003	*J5	C4238	*H7	C4517	*L11	C4753	*J11	C4857	*G12
C260	A8	C531	B12	C914	*L3	C1110	N3	C1901	K12	C2326	*J9	C2612	F9	C2908	*D8	C3129	F7	C3422	D3	C3708	*J5	C4004	J5	C4239	*H7	C4518	*L11	C4754	*J11	C4858	*G11
C261	A9	C532	B13	C915	*L3	C1111	N3	C1902	K12	C2327	*J9	C2613	*E9	C2909	*D8	C3130	F7	C3423	*D3	C3709	H5	C4005	*J5	C4240	*H7	C4519	*L11	C4755	*J12	C4859	*G11
C262	A3	C533	B12	C916	*L3	C1112	N3	C1903	J12	C2328	*J9	C2614	*E9	C2910	*D8	C3131	*F6	C3424	*D4	C3710	*J5	C4006	*J5	C4241	*J7	C4520	*M11	C4756	*J11	C4860	*G11
C263	A4	C534	B12	C917	*K2	C1113	*N4	C1904	J12	C2329	J9	C2615	*E9	C2911	D7	C3132	*F6	C3425	D3	C3711	*J5	C4007	J5	C4242	*H7	C4521	*L11	C4757	*J11	C4861	*G11
C264	A8	C535	B12	C918	*K2	C1114	*N3	C1905	J12	C2330	J9	C2616	F9	C2912	D7	C3133	*F7	C3426	*D4	C3712	*H5	C4008	*J5	C4301	*J7	C4522	L11	C4758	*J11	C4862	*G11
C265	A9	C536	L8	C919	*K2	C1115	*N4	C1906	J12	C2331	*J9	C2617	*E9	C2913	*D8	C3134	F7	C3427	*D4	C3713	H5	C4009	*J5	C4302	*J7	C4523	*L11	C4759	*J11	C4863	*G11
C266	A3	C537	L5	C920	*K2	C1116	*N3	C1907	J12	C2332	*J9	C2618	*E9	C2914	*D8	C3135	*F6	C3428	*D4	C3714	H5	C4010	*J5	C4303	*J7	C4524	*L11	C4760	*J11	C4864	*G11
C267	A4	C538	L5	C921	*K3	C1117	*N4	C1908	J12	C2333	*J9	C2619	D9	C2915	*D8	C3201	*F8	C3429	D3	C3715	*J5	C4011	J5	C4304	J7	C4525	M11	C4761	*J11	C4865	*G11
C268	A8	C539	L6	C922	*K3	C1118	*N3	C1909	J12	C2334	J9	C2620	*E9	C2916	D7	C3202	*F8	C3430	D3	C3716	*J5	C4012	J5	C4305	*J7	C4526	*M11	C4762	*H11	C4866	*G11
C269	A9	C540	L6	C923	*K3	C1119	*N4	C1910	J12	C2335	*J9	C2621	E9	C2917	*D8	C3203	*F8	C3431	*D4	C3717	*H5	C4013	*J5	C4306	*J7	C4527	*M11	C4763	*J11	C4867	*G11
C270	A3	C541	K6	C924	*K3	C1120	*N3	C1911	J12	C2401	*E12	C2622	*E10	C2918	*C7	C3204	*F8	C3432	*D4	C3718	H5	C4014	*J5	C4307	J7	C4528	*M11	C4764	*J11	C4868	*G11
C271	A4	C542	K6	C925	*L2	C1121	M7	C1912	J12	C2402	*E12	C2623	*E9	C2919	C8	C3205	*F8	C3433	*D4	C3719	G6	C4015	*J5	C4308	*J7	C4529	M11	C4765	*J11	C4869	G11
C272	A8	C543	L5	C926	*L2	C1122	N7	C1913	J12	C2403	*E12	C2624	E9	C2920	*D7	C3206	*F8	C3434	D3	C3720	*J5	C4016	J5	C4309	*J7	C4530	L11	C4766	*J11	C4870	*G12
C273	B9	C544	L4	C927	*L2	C1123	M6	C1914	J12	C2404	E12	C2625	*E9	C2921	D8	C3207	*F8	C3435	*D4	C3721	*H6	C4017	*J5	C4310	*J7	C4531	*L11	C4767	*J11	C4871	*G11
C274	B3	C545	L4	C928	*L2	C1124	N6	C1915	J12	C2405	*E12	C2626	*E9	C2922	*D7	C3208	*F8	C3501	*F5	C3722	*H6	C4018	*J6	C4311	J7	C4532	*L11	C4768	*J11	C4872	*G12
C275	B4	C546	L5	C929	*L3	C1201	*N2	C1916	J12	C2406	*E12	C2627	E10	C2923	*D7	C3209	*F8	C3502	*F5	C3723	*J6	C4019	*J5	C4312	J7	C4533	*L11	C4769	H11	C4873	*G12
C276	B8	C547	L6	C930	*L3	C1202	N2	C1917	G12	C2407	E11	C2628	*E10	C2924	D7	C3210	*F8	C3503	*F4	C3724	*J6	C4020	*J5	C4313	*J7	C4534	L11	C4770	*J12	C4874	*G11
C277	B9	C548	L6	C931	*L3	C1203	*N2	C1918	G12	C2408	*E12	C2629	*E10	C2925	*D7	C3211	*F8	C3504	F5	C3725	*J6	C4021	*J5	C4314	*J7	C4535	*L11	C4771	*J11	C4875	*G11
C278	B3	C549	L6	C932	*L3	C1204	*N2	C1919	G12	C2409	*E12	C2630	*E10	C2926	*D7	C3212	*F8	C3505	*F5	C3801	*H3	C4022	J5	C4315	*J7	C4601	P11	C4772	*J12	C4876	*G11
C279	B4	C550	L6	C933	R2	C1205	N2	C1920	G12	C2410	*E12	C2631	E10	C2927	D7	C3213	*F8	C3506	*F5	C3802	*H3	C4023	*J5	C4316	J7	C4602	P11	C4773	*J11	C4877	*G12
C280	B8	C551	K6	C934	*R2	C1206	*N1	C1921	G12	C2411	E12	C2632	E9	C2928	*D7	C3214	*F8	C3507	F5	C3803	*H3	C4024	*J5	C4317	*J7	C4603	P11	C4774	*J11	C4878	*G12
C281	C9	C552	K6	C935	K2	C1207	*N2	C1922	G12	C2412	E12	C2633	E9	C2929	*D7	C3215	*F8	C3508	*F4	C3804	H3	C4025	J5	C4318	*J7	C4604	P11	C4775	*J12	C4879	*G11
C282	C3	C553	K6	C936	K3	C1208	N2	C1923	G12	C2413	*E12	C2634	*E9	C2930	*D7	C3216	*F8	C3509	*F5	C3805	*H3	C4026	*J5	C4319	*H7	C4605	P11	C4776	*H11	C4880	*G11
C283	C4	C554	K6	C937	K2	C1209	*N2	C1924	G12	C2414	*E12	C2635	*E9	C2931	D7	C3217	*F8	C3510	*F5	C3806	*H3	C4027	*J5	C4320	*H7	C4606	P11	C4777	*J12	C4881	*G11
C284	C8	C555	M8	C938	K2	C1210	*N2	C2101	*K12	C2415	*E12	C2636	*E9	C2932	D8	C3218	*F8	C3511	F5	C3807	H3	C4028	*J5	C4321	*H7	C4607	P11	C4778	*J12	C4882	*G11
C285	C9	C556	M8	C939	K2	C1211	N2	C2102	*K12	C2416	E12	C2637	E9	C2933	D7	C3219	*F8	C3512	F5	C3808	*H3	C4029	J5	C4322	J7	C4608	P12	C4779	*K11	C4883	*G12
C286	C3	C557	G1	C940	K2	C1212	*N1	C2103	*J12	C2417	*E12	C2638	*E9	C2934	*D7	C3220	*F8	C3513	*F5	C3809	*H3	C4030	J5	C4323	*J7	C4609	P12	C4780	*J11	C4884	*F11
C287	C4	C558	G1	C941	K3	C1213	N4	C2104	*J12	C2418	*E12	C2639	*E9	C2935	*D7	C3221	*F8	C3514	*F5	C3810	*H3	C4031	*J5	C4324	*H7	C4610	R11	C4781	*J11	C4885	*G12
C288	C8	C559	G1	C942	K3	C1214	*N4	C2105	*J12	C2419	D12	C2640	*E9	C2936	*D7	C3222	*F8	C3515	*F5	C3811	H3	C4032	*J5	C4325	J7	C4611	R11	C4782	*J11	C4886	*G12
C289	C8	C560	M8	C943	K3	C1215	N2	C2106	*J12	C2420	*F12	C2641	*E9	C2937	D7	C3223	*F8	C3516	F5	C3812	H3	C4033	*J5	C4326	*H7	C4612	P11	C4783	*J12	C4887	*G11
C290	C3	C561	N8	C944	K3	C1216	N3	C2107	*J12	C2421	D12	C2642	*D9	C2938	*D7	C3224	*F8	C3517	*F4	C3813	*H3	C4034	J5	C4327	*H7	C4613	P11	C4784	*J11	C4888	*G11
C291	C4	C562	N8	C945	R3	C1217	*N3	C2108	*J12	C2422	*F12	C2701	*E9	C2939	*C8	C3225	*F8	C3518	*F4	C3814	*H3	C4035	*J5	C4328	*J7	C4614	*P11	C4785	*J12	C4889	*G12
C292	C7	C601	*J12	C946	P4	C1218	N1	C2109	*J12	C2423	*F12	C2702	*E10	C2940	*C7	C3226	*F8	C3519	G4	C3815	*H3	C4101	*H5	C4329	J7	C4615	P11	C4786	*J12	C4890	*G12
C293	C8	C602	*J12	C947	P4	C1219	N4	C2110	*J12	C2424	E12	C2703	*E9	C2941	*C7	C3227	*F8	C3520	*F4	C3816	H3	C4102	*H5	C4330	J7	C4616	P11	C4787	*K11	C4891	*G11
C294	C3	C603	*J11	C948	*R3	C1220	*N4	C2111	*J12	C2425	*E12	C2704	E9	C2942	*C6	C3228	*F8	C3521	G4	C3817	*H3	C4103	*H5	C4331	*H7	C4617	P11	C4788	*J11	C4892	*G11
C295	C4	C604	*G12	C949	*R3	C1221	N2	C2112	*J12	C2426	*F12	C2705	*E9	C3001	*D7	C3301	*D4	C3522	*F4	C3818	*H3	C4104	*H5	C4332	*H7	C4618	P11	C4789	*J12	C4893	*G12
C296	C7	C605	*G12	C950	*R3	C1222	N3	C2113	*J12	C2427	E11	C2706	*E9	C3002	*D7	C3302	*D4	C3523	*F4	C3819	K3	C4105	*H5	C4333	*J7	C4619	*P11	C4790	*J12	C4894	*G12
C297	C8	C606	*F11	C951	*R3	C1223	*N3	C2114	*J12	C2428	*F12	C2707	E10	C3003	*D7	C3303	*D4	C3524	F4	C3820	*H3	C4106	*H5	C4334	J7	C4620	P12	C4791	*J11	C4901	*H8

C4902 *H8
C4903 *H8
C4904 *H8
C4905 *J8
C4906 *H8
C4907 *H8
C4908 *H8
C4909 *J9
C4910 *H8
C4911 *H8
C4912 *J8
C4913 *H8
C4914 *H8
C4915 *H8
C4916 *J8
C4917 *H8
C4918 *J8
C4919 *H8
C4920 *H8
C4921 *H8
C4922 *H8
C4923 *J8
C4924 *H8
C4925 *J8
C4926 *H8
C4927 *H8
C4928 *H8
C4929 *J8
C4930 *H8
C4931 *H8
C4932 *H8
C4933 *H8
C4934 *J8
C4935 *H8
C4936 *H9
C4937 *J8
C4938 *H8
C4939 *J8
C4940 *H8
C4941 *H8
C4942 *H7
C4943 *H8
C4944 *G9
C4945 *H7
C4946 *H8
C4947 *H7
C4948 *H8
C4949 *H8
C4950 *H8
C4951 *H7
C4952 *J8
C4953 *J8
C4954 *J8
C4955 *J9
C4956 *J8
C4957 *J9
C4959 *H9
C4960 *H8
C4962 *J9
C4975 *H8
C4976 *H7
C4977 *H8
C4978 *H8
C4979 *H8
C4980 *H8
C4982 *H8
C4984 *H8
C4986 *H8
C4989 *J9
C4991 *H8
C4993 *J8
C4995 *H8
C4998 *H8
C4999 *H8
C5000 *H9
C5001 *H8
C5002 *H8
C5003 *H7
C5004 *J8
C5005 *H8
C5006 *J8
C5007 *H9
C5008 *H8
C5009 *H9
C5010 *H9
C5011 *H9
C5012 *H8
C5013 *H8
C5015 *H8
C5019 *H7
C5020 *H7
C5021 *J8
C5022 *H9
C5023 *J9
C5024 *H9
C5025 *H9
C5026 *H9
C5027 *J7

C5028 *J7
C5029 *J8
C5030 *J8
C5031 J7
C5032 *J8
C5033 *H8
C5034 *H7
C5035 *H8
C5036 *J9
C5037 *J8
C5038 *J8
C5039 *J8
C5040 *J8
C5041 *J8
C5042 J7
C5043 *H9
C5044 *H9
C5045 *J9
C5046 *H8
C5047 *J8
C5048 *J8
C5049 H9
C5050 *H9
C5051 *H8
C5052 *H8
C5053 *H7
C5054 H7
C5055 *J8
C5056 *J8
C5057 *G8
C5058 *H7
C5059 *H8
C5060 H9
C5061 *H9
C5062 *H8
C5063 *H8
C5064 *H7
C5065 H7
C5066 *J8
C5067 *J8
C5068 *H8
C5069 *H7
C5070 *H8
C5071 *J8
C5072 *H9
C5073 *H9
C5074 *H8
C5075 *H8
C5076 *H7
C5077 *H8
C5078 *J8
C5079 *J8
C5080 *H8
C5081 *H8
C5082 *J8
C5083 *J7
C5084 *H9
C5085 *H9
C5086 *H8
C5087 *H8
C5088 *H8
C5089 *H8
C5090 *J8
C5091 *J8
C5092 *J8
C5093 *H8
C5094 *H8
C5095 *G9
C5096 *G9
C5097 *J9
C5101 *F11
C5102 *E11
C5103 *E11
C5104 *E11
C5105 *E11
C5106 *E11
C5107 *E11
C5108 *E11
C5109 *E11
C5110 *E11
C5111 *E11
C5112 *E11
C5113 *E11
C5114 *E11
C5115 *E11
C5116 *F11
C5117 *E11
C5118 *E11
C5119 *E11
C5120 *E10
C5121 *E10
C5122 *E10
C5123 *E10
C5124 *E10
C5125 *E10
C5126 *E10
C5127 *E10
C5128 *E10

C5129 F10
C5130 *E11
C5131 *E10
C5132 *E10
C5133 *E10
C5134 *E10
C5135 *E10
C5136 D11
C5137 *F11
C5138 *E11
C5139 *F10
C5140 *E11
C5141 *E11
C5142 *E10
C5143 *E11
C5144 D11
C5146 *E11
C5147 *E10
C5148 *E11
C5149 *E10
C5150 *E11
C5151 *E10
C5152 *E11
C5153 *E10
C5154 *E11
C5155 *E10
C5156 *E11
C5157 *E10
C5158 *E11
C5160 *E10
C5161 *E10
C5162 *D10
C5166 *D10
C5168 *D10
C5170 *E10
C5172 *F11
C5174 *E10
C5175 *E10
C5176 *E10
C5178 *D10
C5180 *D10
C5182 *D10
C5184 *D10
C5185 *E11
C5186 *D10
C5187 *E11
C5189 *D11
C5191 *D11
C5193 *D10
C5195 *D10
C5198 D11
C5199 *D11
C5200 *D11
C5201 *E11
C5202 *D11
C5203 *D11
C5204 *D11
C5205 *D11
C5206 *E11
C5207 *D11
C5208 *D11
C5209 *E11
C5210 *E11
C5211 *E11
C5212 *E11
C5213 *E10
C5214 *E11
C5215 *E10
C5217 *E11
C5220 *E11
C5221 *E11
C5222 *E11
C5223 *E11
C5224 *E11
C5225 *E11
C5226 *E11
C5227 *E11
C5228 *E11
C5229 *E11
C5230 *E11
C5231 *E10
C5232 *E11
C5233 *E10
C5234 *E10
C5235 *E10
C5236 *E10
C5237 *E10
C5238 *E10
C5239 *E10
C5240 *E10
C5241 *E11
C5242 *E11
C5243 *E11
C5244 *E11
C5245 *E11
C5246 *F11
C5247 *E11
C5248 *E11

C5250 *E11
C5251 *D11
C5252 *D10
C5253 *E10
C5254 E10
C5255 *F11
C5256 *F10
C5257 *D11
C5258 *D11
C5259 *F10
C5260 E11
C5261 *E11
C5262 *D11
C5263 *D10
C5264 *E10
C5265 E10
C5266 *F11
C5267 *F10
C5268 *D11
C5269 *D11
C5270 *F10
C5271 *C10
C5272 *E11
C5273 *E11
C5274 *D11
C5275 *D10
C5276 *E10
C5277 *E10
C5278 *E11
C5279 *E10
C5280 *E11
C5281 *E10
C5282 *E10
C5283 *C11
C5284 *E11
C5285 *E11
C5286 *E11
C5287 *D10
C5288 *E10
C5289 *E10
C5290 *E11
C5291 *E10
C5292 *D10
C5293 *E11
C5294 *E10
C5295 *D11
C5296 *D12
C5297 *F11
C5301 *D5
C5302 *E4
C5303 *D5
C5304 *E4
C5305 *E5
C5306 *E4
C5307 *E4
C5309 *E4
C5310 *E4
C5311 *E5
C5312 *E5
C5313 *E5
C5314 *E5
C5315 *E5
C5316 *E5
C5317 *E4
C5318 *E5
C5320 *E4
C5321 *E5
C5322 *E4
C5323 *E5
C5324 *E4
C5325 *E5
C5326 *E4
C5327 *E5
C5328 *E4
C5329 F5
C5331 *E4
C5332 *E4
C5333 *E4
C5334 *E5
C5336 D3
C5337 *E5
C5338 *E4
C5339 *E5
C5340 *E4
C5341 *E4
C5342 *E5
C5343 *E4
C5344 E3
C5345 *D5
C5346 *E4
C5347 *E5
C5348 *E4

C5361 *E4
C5362 *E4
C5363 *E4

C5364 *D4
C5365 *E4
C5366 *F4
C5367 *E4
C5368 *E3
C5369 *E4
C5370 *E4
C5371 *E4
C5372 *F4
C5373 *E4
C5374 *F4
C5375 *F4
C5376 *F4
C5377 *E4
C5378 *E4
C5379 *E4
C5380 *E4
C5381 *E4
C5382 *E4
C5383 *E4
C5384 *E3
C5385 *E4
C5386 *F3
C5388 *E4
C5389 *E4
C5390 *E4
C5391 *E3
C5392 *E4
C5393 *E4
C5395 *E3
C5397 *E4
C5398 D3
C5399 *D3
C5400 *D4
C5401 *E4
C5402 *E4
C5403 *E3
C5404 *E4
C5405 *E4
C5406 *E4
C5407 *D4
C5408 *D4
C5409 *E4
C5410 *D4
C5411 *D4
C5412 *D4
C5413 *E4
C5414 *D4
C5415 *E4
C5417 *D4
C5418 *D5
C5420 *D5
C5421 *D5
C5422 *D4
C5423 *D4
C5424 *D4
C5426 *D4
C5427 *D4
C5429 *E5
C5430 *E4
C5431 *E4
C5432 *E4
C5433 *E5
C5434 *E4
C5435 *E4
C5436 *E4
C5437 *E4
C5438 *E4
C5439 *E4
C5440 *E4
C5441 *E4
C5442 *E4
C5443 *E5
C5444 *E4
C5445 *E3
C5446 *E4
C5447 *E4
C5448 *E4
C5449 D4
C5450 *D4
C5451 *E3
C5452 *E3
C5453 *F4
C5454 F4
C5455 *E5
C5456 *E5
C5457 *D3
C5458 *D3
C5459 *E5
C5460 *D4
C5461 *D4
C5462 *E3
C5463 *E3
C5464 *F4
C5465 F4
C5466 *E5
C5467 *E5
C5468 *D3

C5470 *E5
C5471 *F5
C5472 *D4
C5473 *D4
C5474 *E4
C5475 *E4
C5476 *F4
C5477 *E4
C5478 *E5
C5479 *E5
C5480 *E5
C5481 *E4
C5482 *E5
C5483 *F5
C5484 *D4
C5485 *D4
C5486 *E4
C5487 *E4
C5488 *E4
C5489 *E4
C5490 *E5
C5491 *E5
C5492 *E4
C5493 *E4
C5494 *E4
C5495 *F3
C5496 *D3
C5497 *D5
C5501 *E7
C5502 *E7
C5503 *D8
C5504 *E7
C5505 *D8
C5506 *E7
C5507 *E6
C5508 *E7
C5509 *E8
C5510 *E7
C5512 *E8
C5514 *E8
C5515 *E7
C5516 *E8
C5517 *E7
C5518 *E8
C5520 *E7
C5521 *E8
C5523 *E7
C5525 *E8
C5526 *E7
C5529 F8
C5530 *E7
C5531 *E7
C5532 *E7
C5533 *E7
C5534 *E8
C5536 D6
C5537 *E8
C5538 *E7
C5539 *E8
C5540 *E7
C5541 *E7
C5543 *E7
C5544 E6
C5545 *E7
C5546 *E7
C5547 *E8
C5548 *E7
C5549 *F8
C5551 *E8
C5553 *F7
C5555 *D8
C5557 *E7
C5558 *E7
C5559 *D7
C5560 *E7
C5561 *E7
C5562 *E7
C5563 *E7
C5564 *F7
C5565 *E7
C5566 *F7
C5567 *E7
C5568 *E6
C5569 *E7
C5570 *D7
C5571 *E7
C5572 *F7
C5573 *E7
C5574 *E8
C5575 *F7
C5576 *F7
C5577 *E7
C5578 *E7
C5579 *E7
C5580 *E7
C5581 *E7
C5582 *E7
C5583 *E7

C5584 *E6
C5585 *E7
C5586 *F6
C5587 *E7
C5589 *E7
C5590 *E7
C5591 *E6
C5593 *E7
C5595 *E7
C5597 *E7
C5598 D6
C5599 *D6
C5600 *D7
C5601 *E7
C5602 *E7
C5603 *E6
C5604 *E7
C5605 *E7
C5606 *E7
C5607 *D7
C5608 *E7
C5609 *D7
C5610 *D7
C5611 *E7
C5612 *D7
C5613 *E7
C5614 *D7
C5615 *E7
C5617 *D7
C5620 *D8
C5621 *D8
C5623 *E6
C5624 *D7
C5625 *D7
C5626 *D7
C5627 *D7
C5628 *F8
C5629 *E6
C5630 *E7
C5631 *D8
C5632 *E7
C5633 *E7
C5634 *E7
C5635 *E7
C5636 *E7
C5637 *E7
C5638 *E7
C5639 *E7
C5640 *E7
C5641 *E7
C5642 *E8
C5643 *E8
C5644 *E7
C5645 *E8
C5646 *E7
C5647 *E7
C5648 *E7
C5649 D7
C5650 *D7
C5651 *E6
C5652 *E6
C5653 *E7
C5654 F7
C5655 *E8
C5656 *E8
C5657 *E8
C5658 *E6
C5659 *E6
C5660 D7
C5661 *D7
C5662 *E6
C5663 *E6
C5664 *F7
C5665 F7
C5666 *E8
C5667 *E8
C5668 *E8
C5669 *E6
C5670 *E7
C5671 *D6
C5672 *D7
C5673 *D7
C5674 *E7
C5675 *E7
C5676 *F7
C5677 *E7
C5678 *E8
C5679 *E8
C5680 *E8
C5681 *E7
C5687 *E7
C5688 *E7
C5689 *E7

C5690 *E8
C5691 *E8
C5692 *E7
C5693 *E7
C5694 *E7
C5695 *D6
C5696 *D6
C5697 *C7
C5701 *H3
C5703 *H4
C5704 *H4
C5705 *J4
C5707 *H4
C5709 *H4
C5711 *H4
C5712 *H4
C5714 *H4
C5716 *H4
C5717 *J4
C5718 *H4
C5721 *H4
C5723 *H4
C5724 *J4
C5725 *H4
C5727 *H5
C5728 *J4
C5729 H5
C5731 *J4
C5732 *H4
C5733 *J4
C5734 *H4
C5735 *J4
C5736 K4
C5737 *H4
C5738 *J4
C5739 *H4
C5740 *J4
C5741 *J4
C5742 *J4
C5743 *J4
C5744 J4
C5745 *J3
C5747 *H5
C5749 *H5
C5751 *H3
C5752 *J4
C5753 *H5
C5755 *H4
C5756 *J4
C5757 *H4
C5759 *J5
C5760 *J4
C5761 *J4
C5762 *H3
C5763 *J4
C5764 *J4
C5765 *J4
C5766 *J5
C5767 *J4
C5768 *J5
C5769 *J4
C5770 *H4
C5771 *H4
C5772 *H4
C5773 *J4
C5774 *J5
C5775 *J5
C5776 *J5
C5777 *J4
C5778 *J4
C5779 *H4
C5780 *J4
C5781 *J4
C5782 *J4
C5783 *J4
C5784 *J5
C5785 *J4
C5786 *J5
C5787 *J4
C5788 *H4
C5789 *J4
C5790 *J4
C5791 *J4
C5792 *J4
C5793 *J4
C5794 *J4
C5795 *J4
C5797 *J4
C5798 J3
C5799 *J4
C5800 *J4
C5801 *J4
C5802 *J4
C5803 *J4
C5804 *J4
C5805 *J4
C5806 *J4
C5807 *J3

C5808 *J4
C5809 *H4
C5810 *J4
C5811 *J4
C5812 *J5
C5813 *J5
C5814 *J3
C5815 *J5
C5816 *J5
C5817 *J3
C5818 *J3
C5819 *H5
C5820 *H3
C5821 *H3
C5822 *H4
C5823 *H4
C5824 *H3
C5825 *J3
C5826 *J3
C5827 *H3
C5828 *H4
C5829 *H4
C5830 *H4
C5831 *H4
C5832 *H4
C5833 *H4
C5834 *H4
C5835 *J4
C5836 *J4
C5837 *J4
C5838 *J4
C5839 *J4
C5840 *J4
C5841 *J4
C5842 *J4
C5843 *J4
C5844 *J4
C5845 *H4
C5846 *H4
C5847 *J4
C5848 *J4
C5849 J3
C5850 *J3
C5851 *J4
C5852 *J4
C5853 *J5
C5854 J5
C5855 *H4
C5856 *H4
C5857 *K3
C5858 *H3
C5859 *H4
C5860 J3
C5861 *J3
C5862 *J4
C5863 *J4
C5864 *J5
C5865 J5
C5866 *H4
C5867 *H4
C5868 *K3
C5869 *H3
C5870 *H4
C5871 *H3
C5872 *J4
C5873 *J3
C5874 *J4
C5875 *J4
C5876 *J5
C5877 *J5
C5878 *H4
C5879 *H4
C5880 *H4
C5881 *J4
C5882 *H4
C5883 *H3
C5884 *J4
C5885 *J4
C5886 *J4
C5887 *J4
C5888 *J4
C5889 *J4
C5890 *H4
C5891 *H4
C5892 *H4
C5893 *J4
C5894 *J4
C5895 *K4
C5896 *J2
C5897 *H5
C5901 *N11
C5902 *N11
C5903 *M11
C5904 *N11
C5905 *N11
C5906 *N11
C5907 *N11
C5908 *N11

C5909 *N11
C5910 *M11
C5911 *M11
C5912 *N11
C5913 *N11
C5914 *N11
C5915 *N11
C5916 *N11
C5917 *N11
C5918 *N11
C5919 *N11
C5920 *M11
C5921 *N11
C5922 *N11
C5923 *N11
C5924 *N11
C5925 *N11
C5926 *M11
C5927 *N11
C5928 *M11
C5929 *N11
C5930 *M11
C5931 *M11
C5932 *N11
C5933 *N11
C5934 *N11
C5935 *N11
C5936 *M11
C5937 *M11
C5938 *N11
C5939 *M11
C5940 M10
C5941 *N11
C5942 *N12
C5943 *N11
C5944 *N11
C5945 *N11
C5946 *N11
C5948 M10
C5949 *N11
C5951 *N11
C5953 *N11
C5955 *N10
C5957 *N12
C5959 *N10
C5960 *N11
C5961 *N11
C5962 *N10
C5963 *N11
C5964 *N11
C5965 *N11
C5966 *N11
C5967 *N11
C5968 *N11
C5969 *N11
C5970 *N11
C5971 *N11
C5972 *N11
C5973 *N11
C5974 *N11
C5975 *N11
C5976 *N11
C5977 *N11
C5978 *N10
C5979 *N11
C5980 *M10
C5981 *N11
C5982 *N10
C5983 *N11
C5984 *N10
C5985 *N11
C5986 *N11
C5987 *N11
C5988 *N11
C5989 *M12
C5990 *N11
C5991 *N11
C5992 *N11
C5993 *M11
C5994 *M11
C5995 *M11
C5997 *N11
C5998 *M12
C5999 *M11
C6000 *M11
C6001 *M11
C6002 *M11
C6003 *N11
C6004 *M10
C6005 *N10
C6007 *M10
C6008 *M10
C6009 *M11
C6010 *M11
C6011 *M11
C6012 *M11
C6013 *M11

C6014 *M11
C6015 *M11
C6017 *M11
C6019 *M12
C6020 *M11
C6021 *M11
C6022 *M11
C6023 *M11
C6024 *M11
C6026 *M11
C6027 *M11
C6028 *M11
C6029 M10
C6030 *M11
C6031 *M10
C6032 *M10
C6033 *M11
C6034 *N10
C6035 *N10
C6036 *N11
C6037 *N11
C6038 *N11
C6039 *N11
C6040 *N12
C6041 *M11
C6042 *N11
C6043 *N11
C6044 *N11
C6045 *N11
C6046 *N11
C6047 *M11
C6048 *N11
C6049 M11
C6050 *M11
C6051 *N10
C6052 *N10
C6053 *N11
C6054 *N11
C6055 *N12
C6056 *N12
C6057 *N11
C6058 *N11
C6059 *N10
C6060 M11
C6061 *M11
C6062 *N10
C6063 *N10
C6064 *N11
C6065 *N11
C6066 *N12
C6067 *N11
C6068 *N11
C6069 *N11
C6070 *N10
C6071 *P10
C6072 *M11
C6073 *M11
C6074 *N10
C6075 *N10
C6076 *N11
C6077 *N11
C6078 *N11
C6079 *N11
C6080 *N11
C6081 *N11
C6082 *N11
C6083 *P10
C6084 *M11
C6085 *M11
C6086 *N10
C6087 *N10
C6088 *N11
C6089 *N11
C6090 *N11
C6091 *N11
C6092 *N11
C6093 *M11
C6094 *N11
C6095 *P10
C6096 *P11
C6097 *L11
CL501 L5
CL502 L5
CL503 L6
CL504 L6
CL601 F11
CL602 F11
CL700 *L7
CL701 *L7
CL702 *L7
CL703 *L7
CL704 *L8
CL901 *P4
CL902 *R4
CL1001 *F2
CL1501 *P7
CL1502 *P7

CL1503 *P7
CL1504 *P7
CL1505 P7
CL1506 P7
CL2201 G9
CL2401 D12
CL2601 E9
CL2801 F8
CL2901 D8
CL3301 D5
CL3501 F4
CL3701 G6
CL3801 K2
CL4201 J7
CL4401 L12
CL4701 *K11
CL4702 *J11
CL4703 K11
CL4704 K11
CL4705 *K11
CL4706 K11
CL4707 *K11
CL4708 *K11
CL4709 K11
CL4710 K11
CL4711 K11
CL4712 K11
CL4713 K11
CL4801 *G11
CL4802 *G11
CL4803 H11
CL4804 H11
CL4805 *H11
CL4806 H11
CL4807 *H11
CL4808 *H11
CL4809 H11
CL4810 H11
CL4811 H11
CL4812 H11
CL4813 H11
CL4901 *J8
CL4902 *H8
CL4903 *G9
CL4904 *H9
CL4905 *J9
CL4906 *J9
CL5101 *D10
CL5102 *D10
CL5301 *E3
CL5302 *E3
CL5501 *D8
CL5502 *E8
CL5503 *E8
CL5504 *E8
CL5505 *F6
CL5506 *F6
CL5701 *H4
CL5702 *H5
CL5703 *H5
CL5704 *H5
CL5705 *J4
CL5706 *J4
CL5901 *P11
CL5902 *P11
CN801 P3
CN802 L3
CN803 C1
CN804 C2
CN1001 E1
CN1801 D1
CNB1 B13
CNC1 C13
CNE1 E13
CNJ1 J13
CNK1 K13
CNP1 P13
D201 C12
D202 B12
D203 H1
D301 K1
D302 J1
D303 K1
D304 J1
D305 J1
D306 J1
D307 J1
D308 H1
D309 K1
D401 *H10
D402 H1
D403 J1
D404 *L12
D405 J1
D406 *G10
D407 J1

D408 *N9
D501 K2
D701 J1
D702 N1
D703 N1
D704 N1
D705 N1
D706 N1
D707 N1
D708 N1
D709 N1
D710 N1
D711 N1
D712 N1
D713 N1
D714 N1
D715 N1
D716 N1
D717 N1
D718 C1
D719 B1
D720 K1
D721 B1
D901 L1
D902 L1
D903 L1
D904 L1
D1001 F2
D1002 F2
D1003 F2
D1501 J1
D1502 J1
D1503 J1
D1504 K1
D1505 K1
D1506 J1
D1507 K1
D1508 K1
D1509 J1
D1510 K1
DD201 B11
DD202 B10
DD203 B6
DD204 B9
DD205 B5
DD206 B8
DD207 B3
DD208 B4
DD209 B7
E1 B1
E2 H1
E3 M1
E4 C6
E5 M6
E6 R9
E7 C12
E8 M13
E9 R13
E10 K4
E21 *A1
E22 *G2
E23 *P1
E24 *C6
E25 *G6
E26 *K8
E27 *R8
E28 *B12
E29 *J11
E30 *R12
F201 A12
F202 A11
F203 A10
F204 A6
F205 A9
F206 A5
F207 A8
F208 A3
F209 A4
F210 A7
FB501 L8
FB801 C1
FB802 C1
FB803 C1
FB804 C1
FB1001 *E2
FB1002 *E2
FB1003 *F2
FB1004 *E2
FB1005 *F2
FB2201 G9
FB2401 D12
FB2801 F8
FB2901 D8

FB3301 C5
FB3501 G4
FB3701 G6
FB3801 K3
FB4201 J7
FB4401 L12
FB4701 *K11
FB4702 H11
FB4801 *G11
FB4802 G11
FB4901 *G8
FB4902 *H7
FB4903 *G8
FB5101 *D11
FB5102 *D11
FB5103 *F10
FB5301 *D3
FB5302 *D3
FB5303 *E5
FB5501 *E8
FB5502 *E6
FB5503 *E6
FB5701 *K3
FB5702 *H3
FB5703 *H4
FB5901 *P11
FB5902 *P11
FB5903 *P10
IC1 M8
IC5 J12
IC6 G12
IC7 E11
IC8 E4
IC9 E7
IC10 J4
IC11 H8
IC12 N11
IC21 P8
IC301 K1
IC302 K1
IC303 J1
IC304 H1
IC305 K1
IC401 H10
IC402 K12
IC403 G10
IC404 N8
IC501 L5
IC502 L8
IC503 B12
IC504 B12
IC505 L5
IC506 L6
IC507 K6
IC508 G1
IC509 M8
IC510 N8
IC512 M8
IC601 G10
IC701 B1
IC801 C1
IC901 R2
IC1001 E2
IC1008 F2
IC1009 F2
IC1101 N6
IC1102 N6
IC1103 *N3
IC1104 N4
IC1105 N3
IC1106 M6
IC1201 N2
IC1202 *N2
IC1203 N2
IC1204 *N4
IC1205 N4
IC1206 *N2
IC1301 M5
IC1302 M4
IC1303 M5
IC1304 M3
IC1305 N5
IC1306 P5
IC1601 P8
IC1602 N8
IC1801 D2
IC1802 D2
IC1803 D2
IC1804 D1
IC2201 H9
IC2202 G10

IC2301 J9
IC2302 J9
IC2401 E12
IC2402 D12
IC2403 E12
IC2501 D12
IC2502 E12
IC2601 E9
IC2602 E9
IC2603 E9
IC2701 E9
IC2702 D9
IC2801 F7
IC2802 F8
IC2901 D8
IC2902 D8
IC2903 D7
IC3001 D7
IC3002 D7
IC3101 F7
IC3102 F7
IC3201 F8
IC3301 D4
IC3302 D5
IC3303 D5
IC3401 D4
IC3402 D4
IC3501 F5
IC3502 G4
IC3503 F4
IC3601 F4
IC3602 F4
IC3701 J5
IC3702 G5
IC3801 H3
IC3802 K3
IC3803 J3
IC3901 J3
IC3902 J3
IC4001 J5
IC4002 J5
IC4101 H5
IC4201 H7
IC4301 J7
IC4302 J7
IC4401 L11
IC4402 L11
IC4403 L12
IC4501 L10
IC4502 L11
IC4601 P11
IC4901 *H9
IC5001 D11
IC5301 E3
IC5501 E6
IC5701 K4
IC5901 M10

L4817 F12
L4901 H9
L4902 *H9
L4903 *G8
L4904 *G8
L4905 *H7
L4906 H7
L4907 *J8
L4908 *J8
L5101 E11
L5102 *E11
L5103 *D11
L5104 *D10
L5105 *E10
L5106 E10
L5107 *F11
L5108 *F10
L5301 D4
L5302 *D4
L5303 *E3
L5304 *E3
L5305 *F4
L5306 F4
L5307 *E5
L5308 *E5
L5501 D7
L5502 *D7
L5503 *E6
L5504 *E6
L5505 *F7
L5506 F7
L5507 *E8
L5508 *E8
L5701 J3
L5702 *J3
L5703 *K4
L5704 *K4
L5705 *J5
L5706 J5
L5707 *H4
L5708 *H4
L5901 M11
L5902 *M11
L5903 *N10
L5904 *N10
L5905 *N11
L5906 *N11
L5907 *N12
L5908 *N12

L6901 *M11
L6902 *M11
L6903 *M11
L6904 *M11
L6905 *M11
L6906 *M11
L6907 *M11
L6908 *M11
L6909 *M11
L6910 *M11
L6911 *M11
L6912 *M11
L6913 *M11
L6914 *M11
L6915 *M11
L6916 *M11
L6917 *M11
L6918 *M11
L6919 *M11
L6920 *M11
L6921 *M11
L6922 *M11
L6923 *M11
L6924 *M11
L6925 *M11
L6926 *M11
L6927 *M11
L6928 *M11
L6929 *M11
L6930 *M11
L6931 *M11
L6932 *M11
L6933 *M11
L6934 *M11
L6935 *M11
L6936 *M11
L6937 *M11
L6938 *M11
L6939 *M11
L6940 *M11
L6941 *M11
L6942 *M11
L6943 *M11
L6944 *M11
L6945 *M11
L6946 *M11
L6947 *M11
L6948 *M11
L6949 *M11
L6950 *M11
L6951 *M11
L6952 *M11
L6953 *M11
L6954 *M11
L6955 *M11
L6956 *M11
L6957 *M11
L6958 *M11
L6959 *M11
L6960 *M11
L6961 *M11
L6962 *M11
L6963 *M11
L6964 *M11
L6965 *M11
L6966 *M11
L6967 *M11
L6968 *M11
L6969 *M11
L6970 *M11
L6971 *M11
L6972 *M11
L6973 *M11
L6974 *M11
L6975 *M11
L6976 *M11
L6977 *M11
L6978 *M11
L6979 *M11
L6980 *M11
L6981 *M11
L6982 *M11
L6983 *M11
L6984 *M11
L6985 *M11
L6986 *M11
L6987 *M11
L6988 *M11
L6989 *M11
L6990 *M11
L6991 *M11
L6992 *M11
L6993 *M11
L6994 *M11
L6995 *M11
L6996 *M11
L6997 *M11
L6998 *M11
L6999 *M11
L7000 *M11
L7001 *M11
L7002 *M11
L7003 *M11
L7004 *M11
L7005 *M11
L7006 *M11
L7007 *M11
L7008 *M11
L7009 *M11
L7010 *M11
L7011 *M11
L7012 *M11
L7013 *M11
L7014 *M11
L7015 *M11
L7016 *M11
L7017 *M11
L7018 *M11
L7019 *M11
L7020 *M11
L7021 *M11
L7022 *M11
L7023 *M11
L7024 *M11
L7025 *M11
L7026 *M11
L7027 *M11
L7028 *M11
L7029 *M11
L7030 *M11
L7031 *M11
L7032 *M11
L7033 *M11
L7034 *M11
L7035 *M11
L7036 *M11
L7037 *M11
L7038 *M11
L7039 *M11
L7040 *M11
L7041 *M11
L7042 *M11
L7043 *M11
L7044 *M11
L7045 *M11
L7046 *M11
L7047 *M11
L7048 *M11
L7049 *M11
L7050 *M11
L7051 *M11
L7052 *M11
L7053 *M11
L7054 *M11
L7055 *M11
L7056 *M11
L7057 *M11
L7058 *M11
L7059 *M11
L7060 *M11
L7061 *M11
L7062 *M11
L7063 *M11
L7064 *M11
L7065 *M11
L7066 *M11
L7067 *M11
L7068 *M11
L7069 *M11
L7070 *M11
L7071 *M11
L7072 *M11
L7073 *M11
L7074 *M11
L7075 *M11
L7076 *M11
L7077 *M11
L7078 *M11
L7079 *M11
L7080 *M11
L7081 *M11
L7082 *M11
L7083 *M11
L7084 *M11
L7085 *M11
L7086 *M11
L7087 *M11
L7088 *M11
L7089 *M11
L7090 *M11
L7091 *M11
L7092 *M11
L7093 *M11
L7094 *M11
L7095 *M11
L7096 *M11
L7097 *M11
L7098 *M11
L7099 *M11
L7100 *M11
L7101 *M11
L7102 *M11
L7103 *M11
L7104 *M11
L7105 *M11
L7106 *M11
L7107 *M11
L7108 *M11
L7109 *M11
L7110 *M11
L7111 *M11
L7112 *M11
L7113 *M11
L7114 *M11
L7115 *M11
L7116 *M11
L7117 *M11
L7118 *M11
L7119 *M11
L7120 *M11
L7121 *M11
L7122 *M11
L7123 *M11
L7124 *M11
L7125 *M11
L7126 *M11
L7127 *M11
L7128 *M11
L7129 *M11
L7130 *M11
L7131 *M11
L7132 *M11
L7133 *M11
L7134 *M11
L7135 *M11
L7136 *M11
L7137 *M11
L7138 *M11
L7139 *M11
L7140 *M11
L7141 *M11
L7142 *M11
L7143 *M11
L7144 *M11
L7145 *M11
L7146 *M11
L7147 *M11
L7148 *M11
L7149 *M11
L7150 *M11
L7151 *M11
L7152 *M11
L7153 *M11
L7154 *M11
L7155 *M11
L7156 *M11
L7157 *M11
L7158 *M11
L7159 *M11
L7160 *M11
L7161 *M11
L7162 *M11
L7163 *M11
L7164 *M11
L7165 *M11
L7166 *M11
L7167 *M11
L7168 *M11
L7169 *M11
L7170 *M11
L7171 *M11
L7172 *M11
L7173 *M11
L7174 *M11
L7175 *M11
L7176 *M11
L7177 *M11
L7178 *M11
L7179 *M11
L7180 *M11
L7181 *M11
L7182 *M11
L7183 *M11
L7184 *M11
L7185 *M11
L7186 *M11
L7187 *M11
L7188 *M11
L7189 *M11
L7190 *M11
L7191 *M11
L7192 *M11
L7193 *M11
L7194 *M11
L7195 *M11
L7196 *M11
L7197 *M11
L7198 *M11
L7199 *M11
L7200 *M11
L7201 *M11
L7202 *M11
L7203 *M11
L7204 *M11
L7205 *M11
L7206 *M11
L7207 *M11
L7208 *M11
L7209 *M11
L7210 *M11
L7211 *M11
L7212 *M11
L7213 *M11
L7214 *M11
L7215 *M11
L7216 *M11
L7217 *M11
L7218 *M11
L7219 *M11
L7220 *M11
L7221 *M11
L7222 *M11
L7223 *M11
L7224 *M11
L7225 *M11
L7226 *M11
L7227 *M11
L7228 *M11
L7229 *M11
L7230 *M11
L7231 *M11
L7232 *M11
L7233 *M11
L7234 *M11
L7235 *M11
L7236 *M11
L7237 *M11
L7238 *M11
L7239 *M11
L7240 *M11
L7241 *M11
L7242 *M11
L7243 *M11
L7244 *M11
L7245 *M11
L7246 *M11
L7247 *M11
L7248 *M11
L7249 *M11
L7250 *M11
L7251 *M11
L7252 *M11
L7253 *M11
L7254 *M11
L7255 *M11
L7256 *M11
L7257 *M11
L7258 *M11
L7259 *M11
L7260 *M11
L7261 *M11
L7262 *M11
L7263 *M11
L7264 *M11
L7265 *M11
L7266 *M11
L7267 *M11
L7268 *M11
L7269 *M11
L7270 *M11
L7271 *M11
L7272 *M11
L7273 *M11
L7274 *M11
L7275 *M11
L7276 *M11
L7277 *M11
L7278 *M11
L7279 *M11
L7280 *M11
L7281 *M11
L7282 *M11
L7283 *M11
L7284 *M11
L7285 *M11
L7286 *M11
L7287 *M11
L7288 *M11
L7289 *M11
L7290 *M11
L7291 *M11
L7292 *M11
L7293 *M11
L7294 *M11
L7295 *M11
L7296 *M11
L7297 *M11
L7298 *M11
L7299 *M11
L7300 *M11
L7301 *M11
L7302 *M11
L7303 *M11
L7304 *M11
L7305 *M11
L7306 *M11
L7307 *M11
L7308 *M11
L7309 *M11
L7310 *M11
L7311 *M11
L7312 *M11
L7313 *M11
L7314 *M11
L7315 *M11
L7316 *M11
L7317 *M11
L7318 *M11
L7319 *M11
L7320 *M11
L7321 *M11
L7322 *M11
L7323 *M11
L7324 *M11
L7325 *M11
L7326 *M11
L7327 *M11
L7328 *M11
L7329 *M11
L7330 *M11
L7331 *M11
L7332 *M11
L7333 *M11
L7334 *M11
L7335 *M11
L7336 *M11
L7337 *M11
L7338 *M11
L7339 *M11
L7340 *M11
L7341 *M11
L7342 *M11
L7343 *M11
L7344 *M11
L7345 *M11
L7346 *M11
L7347 *M11
L7348 *M11
L7349 *M11
L7350 *M11
L7351 *M11
L7352 *M11
L7353 *M11
L7354 *M11
L7355 *M11
L7356 *M11
L7357 *M11
L7358 *M11
L7359 *M11
L7360 *M11
L7361 *M11
L7362 *M11
L7363 *M11
L7364 *M11
L7365 *M11
L7366 *M11
L7367 *M11
L7368 *M11
L7369 *M11
L7370 *M11
L7371 *M11
L7372 *M11
L7373 *M11
L7374 *M11
L7375 *M11
L7376 *M11
L7377 *M11
L7378 *M11
L7379 *M11
L7380 *M11
L7381 *M11
L7382 *M11
L7383 *M11
L7384 *M11
L7385 *M11
L7386 *M11
L7387 *M11
L7388 *M11
L7389 *M11
L7390 *M11
L7391 *M11
L7392 *M11
L7393 *M11
L7394 *M11
L7395 *M11
L7396 *M11
L7397 *M11
L7398 *M11
L7399 *M11
L7400 *M11
L7401 *M11
L7402 *M11
L7403 *M11
L7404 *M11
L7405 *M11
L7406 *M11
L7407 *M11
L7408 *M11
L7409 *M11
L7410 *M11
L7411 *M11
L7412 *M11
L7413 *M11
L7414 *M11
L7415 *M11
L7416 *M11
L7417 *M11
L7418 *M11
L7419 *M11
L7420 *M11
L7421 *M11
L7422 *M11
L7423 *M11
L7424 *M11
L7425 *M11
L7426 *M11
L7427 *M11
L7428 *M11
L7429 *M11
L7430 *M11
L7431 *M11
L7432 *M11
L7433 *M11
L7434 *M11
L7435 *M11
L7436 *M11
L7437 *M11
L7438 *M11
L7439 *M11
L7440 *M11
L7441 *M11
L7442 *M11
L7443 *M11
L7444 *M11
L7445 *M11
L7446 *M11
L7447 *M11
L7448 *M11
L7449 *M11
L7450 *M11
L7451 *M11
L7452 *M11
L7453 *M11
L7454 *M11
L7455 *M11
L7456 *M11
L7457 *M11
L7458 *M11
L7459 *M11
L7460 *M11
L7461 *M11
L7462 *M11
L7463 *M11
L7464 *M11
L7465 *M11
L7466 *

R210	B5	R350	*H1	R558	*M8	R716	M8	R816	L7	R941	K2	R1310	M4	R1555	*N8	R1653	P8	R1767	*J11	R2504	E12	R4208	H7	R5309	*D5	RB1118	M4
R211	*B11	R351	H1	R559	N8	R717	M8	R817	L7	R942	K3	R1311	M5	R1556	*N8	R1654	*P7	R1768	*J11	R2601	*F9	R4301	*J7	R5310	*D5	RB1119	M3
R212	*B11	R352	H1	R560	M8	R718	M8	R818	J1	R943	K2	R1312	M5	R1557	*N8	R1655	N7	R1769	*G11	R2602	F9	R4302	J7	R5311	*D4	RB1120	M3
R213	*B10	R353	K1	R563	M8	R719	M8	R819	L7	R944	K3	R1313	M4	R1558	*N8	R1661	P9	R1770	*G11	R2603	D9	R4303	*J7	R5312	*D4	RB1121	M3
R214	*B10	R354	K1	R564	M8	R720	M8	R820	L7	R945	P4	R1314	L6	R1559	J1	R1662	P9	R1801	D1	R2604	D9	R4304	J7	R5313	*D3	RB1122	M3
R215	*B6	R355	*K1	R565	M8	R721	M8	R821	M7	R946	R4	R1315	M3	R1560	*N8	R1663	P9	R1802	D1	R2605	*E9	R4405	*L11	R5501	*E6	RB1123	M6
R216	*B6	R356	*K1	R566	M8	R722	M8	R822	M8	R947	R3	R1316	M6	R1561	*N8	R1664	P9	R1803	D1	R2606	E9	R4410	*L11	R5502	*E6	RB1124	M6
R217	*B9	R357	K1	R567	M8	R723	M8	R823	M8	R948	P4	R1317	M5	R1562	*N8	R1665	P9	R1804	D1	R2607	E9	R4411	M12	R5505	*E8	RB1125	M6
R218	*B9	R358	K1	R568	M8	R724	M8	R824	M8	R949	P4	R1318	M5	R1563	*N8	R1666	P9	R1805	D1	R2608	E9	R4412	M12	R5506	*E8	RB1126	N6
R219	*B5	R401	H10	R569	M8	R725	M8	R825	M8	R950	P4	R1319	M5	R1564	K1	R1667	P9	R1806	D1	R2701	*E9	R4413	L12	R5507	*E7	RB1201	M2
R220	*B5	R402	H10	R570	M8	R726	*M7	R826	M8	R951	P4	R1320	M5	R1565	K1	R1668	P9	R1807	D1	R2702	E9	R4414	L12	R5508	*E6	RB1202	*P2
R221	*B11	R403	H10	R571	M8	R727	*M7	R827	M8	R952	P4	R1321	M2	R1566	*N8	R1669	N9	R1808	D2	R2703	*D9	R4415	L11	R5509	*D7	RB1203	M2
R222	*B11	R404	H10	R572	G1	R728	*M7	R828	M8	R953	R4	R1322	M3	R1567	*N8	R1670	N9	R1809	D2	R2704	E9	R4416	L11	R5510	*D6	RB1204	M2
R223	*B10	R405	H10	R573	N8	R729	*M7	R829	M8	R954	R4	R1323	M3	R1568	*N8	R1671	N9	R1810	D2	R2801	*F7	R4505	*L10	R5511	*D7	RB1205	*P2
R224	*B10	R406	H1	R574	M8	R730	M8	R830	M8	R955	R4	R1324	M3	R1569	*N8	R1672	N9	R1811	D2	R2802	F8	R4510	*L11	R5512	*D8	RB1206	M2
R225	*B6	R407	H1	R575	M8	R731	*M7	R831	M8	R956	R3	R1325	M3	R1570	J1	R1673	P9	R1812	D2	R2803	F9	R4511	L10	R5513	*D7	RB1207	M2
R226	*B6	R408	L13	R576	M8	R732	*M8	R832	M8	R957	R3	R1326	M5	R1571	K1	R1674	P9	R1813	D2	R2804	F9	R4512	L11	R5514	*D7	RB1208	*P2
R227	*B9	R409	K12	R577	N8	R733	L8	R833	M8	R958	R3	R1327	M3	R1572	K1	R1675	P9	R1814	D2	R2805	F8	R4601	N11	R5515	*D6	RB1209	M1
R228	*B9	R410	K12	R578	M8	R734	M8	R834	M8	R959	R3	R1328	M6	R1573	K1	R1676	P9	R1815	D2	R2806	F7	R4602	P11	R5701	*K4	RB1210	M2
R229	*B5	R411	K12	R579	N8	R735	M8	R835	M8	R960	R3	R1329	M3	R1574	K1	R1677	P9	R1816	D2	R2901	*D8	R4603	P11	R5702	*J4	RB1211	*P2
R230	*B5	R412	K12	R580	N8	R736	L8	R836	M8	R961	R3	R1330	N6	R1575	J1	R1678	N9	R1817	D2	R2902	C7	R4701	K11	R5705	*H4	RB1212	M1
R231	C11	R413	K12	R581	N8	R737	L8	R837	M8	R962	R3	R1331	N5	R1576	K1	R1679	P9	R1818	D2	R2903	C8	R4702	*K11	R5706	*H5	RB1213	*P4
R232	C10	R414	J1	R582	N8	R738	L8	R838	M8	R963	R3	R1332	N5	R1577	J1	R1680	N9	R1819	D2	R2904	C8	R4703	*K11	R5707	*J4	RB1214	M4
R233	C7	R415	J1	R583	N8	R739	L8	R839	M8	R964	R3	R1333	N5	R1578	K1	R1681	P9	R1820	D2	R2905	*D7	R4704	*K11	R5708	*J4	RB1215	*P2
R234	C10	R416	L13	R584	N8	R740	L8	R840	M8	R965	R3	R1334	M2	R1579	P7	R1682	N9	R1821	D2	R2906	D8	R4705	*K11	R5709	*J4	RB1216	*P4
R235	C5	R417	G10	R601	*J12	R741	M7	R841	C1	R966	R3	R1335	N5	R1580	P7	R1683	P9	R1822	D2	R2907	D8	R4706	*K11	R5710	*J4	RB1217	M4
R236	B9	R418	G10	R602	*J12	R742	M8	R842	C1	R967	R3	R1336	N5	R1581	P7	R1684	N9	R1823	D2	R2908	C7	R4707	*K11	R5711	*H3	RB1218	*P2
R237	B3	R419	G10	R603	*J11	R743	*N7	R843	C1	R968	R3	R1337	N6	R1582	P7	R1685	P9	R1824	D2	R3001	*D7	R4708	*K11	R5712	*H3	RB1219	*P3
R238	B4	R420	G10	R604	H11	R744	L8	R844	B1	R969	L4	R1338	N6	R1583	*P8	R1686	P9	R1825	D2	R3002	C7	R4709	*K11	R5713	*J4	RB1220	M3
R239	B8	R421	G10	R605	H11	R745	M7	R845	B1	R970	L5	R1339	P5	R1584	N7	R1687	P9	R1826	D2	R3003	*D6	R4710	K11	R5714	*J4	RB1221	*P1
R240	*B8	R422	J1	R606	H12	R746	M8	R846	B1	R971	L5	R1340	P5	R1585	P7	R1688	P9	R1827	E2	R3004	C6	R4711	K11	R5715	*J4	RB1222	*P3
R241	*B8	R423	J1	R607	H11	R747	*N7	R847	M8	R972	L5	R1341	P5	R1586	*N8	R1689	P9	R1828	E2	R3101	*F7	R4712	K11	R5901	*M10	RB1223	M3
R242	*B3	R424	L13	R608	H11	R748	M8	R848	M8	R973	L5	R1342	P5	R1587	*P8	R1690	P9	R1829	E2	R3102	F7	R4713	K11	R5902	*M10	RB1224	*P1
R243	*B3	R425	N8	R609	H12	R749	M8	R849	M8	R974	L5	R1343	P5	R1588	P7	R1691	P9	R1830	E2	R3103	*F7	R4714	*J12	R5903	*M10	RB4601	*P11
R244	*B4	R426	N8	R610	H11	R750	*N7	R850	M8	R975	L5	R1344	N6	R1589	*N8	R1692	P9	R1831	E2	R3104	F7	R4715	*J12	R5904	*M10	RB4602	*P11
R245	*B4	R427	N8	R611	H11	R751	M8	R851	M8	R976	M5	R1401	*J12	R1590	P8	R1693	*J8	R1832	*M12	R3201	*F8	R4716	*J11	R5905	*M11	RB4603	*P11
R246	*B7	R428	N8	R612	H12	R752	M8	R852	M8	R977	M5	R1402	*D10	R1591	J1	R1694	*J8	R1833	*D8	R3202	*F8	R4717	*J12	R5906	*M11	RB4604	*P11
R247	*B8	R429	N8	R613	H11	R753	*N7	R853	M8	R978	M4	R1403	*E3	R1592	P7	R1695	*G9	R1834	*M7	R3203	*F8	R4718	*J11	R5907	*M10	RB4605	*P11
R248	*B8	R430	J1	R614	H11	R754	M8	R854	M8	R979	M4	R1404	*F12	R1593	*N8	R1696	*G9	R1835	*M12	R3204	*F8	R4719	*J11	R5908	*M10	RB4606	*P11
R249	*B3	R431	J1	R615	H12	R755	M8	R855	M8	R980	M4	R1405	*E6	R1594	P7	R1697	*H9	R1836	*E8	R3205	*F8	R4720	*K11	R5909	*M10	RB4607	*P11
R250	*B3	R432	R9	R616	H11	R756	M8	R856	M8	R986	P4	R1406	*J4	R1595	P8	R1698	*N11	R1837	*G12	R3301	*D4	R4721	*K11			RB4608	*P11
R251	*B4	R501	K5	R617	H11	R757	M8	R857	M7	R987	P4	R1407	H9	R1596	P8	R1699	*M10	R1838	*J8	R3302	C4	R4722	*K11	RB701	*G1	RB4609	*P11
R252	*B4	R502	K5	R618	H12	R758	*M7	R858	P3	R988	P4	R1408	N11	R1597	N7	R1700	*N10	R1839	*P7	R3303	D5	R4723	*K11	RB702	*G1	RB4610	*R11
R253	*B7	R503	K5	R619	E11	R759	*M8	R859	P3	R989	P4	R1409	*L11	R1598	P8	R1701	*M11	R1840	D2	R3304	D5	R4801	H11	RB703	N1	RB4611	*P11
R254	*B7	R504	L5	R620	E10	R760	M8	R860	*P3	R990	P4	R1501	N8	R1599	N8	R1702	*H9	R1841	D2	R3305	*D5	R4802	*H11	RB704	N1	RB4612	*P11
R255	C9	R505	K5	R621	D4	R761	M8	R861	*P3	R991	P4	R1502	N8	R1600	N8	R1703	*G9	R1842	*P7	R3306	D5	R4803	*H11	RB705	N1		
R256	C3	R506	L5	R622	F4	R762	*M7	R862	*P3	R992	M5	R1503	P8	R1601	P8	R1704	*M11	R1843	*J12	R3307	D5	R4804	*H11	RB706	N1	S501	G1
R257	C4	R507	K5	R623	D7	R764	M8	R863	*P3	R1001	*E2	R1504	N8	R1602	*N8	R1705	*G9	R1844	*H4	R3308	C4	R4805	*H11	RB801	C1	S701	G1
R258	C8	R508	L5	R624	F7	R765	*M8	R864	*P3	R1002	*E2	R1505	N8	R1603	*P8	R1706	*N10	R1845	*P7	R3401	*D3	R4806	*H11	RB802	*P2	S801	G1
R301	K1	R509	L5	R625	*G12	R766	M8	R865	*P3	R1003	E2	R1506	N7	R1604	N8	R1707	*M10	R1846	*P7	R3402	C3	R4807	*H11	RB803	*P1		
R302	K1	R510	K5	R626	*G12	R767	M8	R866	P3	R1004	F2	R1507	N7	R1605	N8	R1708	*F10	R1847	*E11	R3403	*D4	R4808	*H11	RB804	*P1	SORI01	A6
R303	K1	R511	K5	R627	*G11	R768	M8	R867	P2	R1005	F2	R1508	N7	R1606	P8	R1709	*F10	R1848	*E5	R3404	C4	R4809	*H11	RB805	*P1	SORI02	R6
R304	*K1	R512	K5	R628	F11	R769	M8	R868	G1	R1006	F2	R1509	N7	R1607	P8	R1710	*D11	R1849	*P7	R3501	*F5	R4810	H11	RB806	P2		
R305	*K1	R513	L5	R629	F11	R771	M8	R869	H1	R1007	E2	R1510	*N7	R1608	P8	R1711	*D11	R1850	*E5	R3502	F5	R4811	H11	RB807	P2	T901	K2
R306	*K1	R514	K5	R630	F12	R772	L8	R870	*P2	R1008	F2	R1511	*N7	R1609	P8	R1712	*D11	R1851	D1	R3503	G4	R4812	H11	RB808	P2	T902	K3
R307	*K1	R515	K5	R631	F11	R773	M8	R871	P3	R1009	F2	R1512	N8	R1610	P8	R1713	*H4	R1852	D1	R3504	G4	R4813	H11	RB809	P2		
R308	K1	R516	K5	R632	F11	R774	M8	R872	P3	R1010	F2	R1513	*N7	R1611	P8	R1714	*H4	R1853	D1	R3505	*F4	R4814	*G12	RB810	P2	TP201	C13
R309	K1	R517	L8	R633	F12	R775	*M8	R873	P3	R1011	F2	R1514	N8	R1612	P8	R1715	*J4	R1854	D1	R3506	G4	R4815	*G12	RB811	P1	TP202	A12
R310	*K1	R518	L8	R634	F11	R776	*M8	R901	R2	R1012	F2	R1515	*N7	R1613	P8	R1716	*J4	R1855	D1	R3507	G4	R4816	*G11	RB812	P1	TP203	C12
R311	*K1	R519	L8	R635	F11	R777	M7	R902	R2	R1013	F2	R1516	N7	R1614	P8	R1717	*J4	R1856	D1	R3508	F4	R4817	*G12	RB813	P1	TP204	C11
R312	*K1	R520	L8	R636	F12	R778	M7	R903	L1	R1014	*F2	R1517	*N8	R1615	P8	R1718	*D11	R1901	J11	R3601	*F4	R4818	*G11	RB814	*P2	TP205	C7
R313	*K1	R521	L8	R637	F11	R779	*M8	R904	L1	R1015	*F2	R1518	N7	R1616	*P8	R1719	*J4	R1902	G11	R3602	F4	R4819	*G11	RB815	*P2	TP206	C10
R314	J1	R522	L8	R638	F11	R780	*M8	R905	L1	R1016	F2	R1519	*N8	R1617	*P8	R1720	*D11	R2001	F11	R3603	*F4	R4820	*H11	RB816	*P2	TP207	C5
R315	J1	R523	K5	R639	F12	R781	L7	R906	L1	R1017	F2	R1520	N7	R1618	*P8	R1721	*J4	R2002	F11	R3604	F4	R4821	*H11	RB817	*P2	TP208	C9
R316	*K1	R524	L5	R640	F11	R782	L7	R907	R2	R1018	*F2	R1521	*N7	R1619	*P8	R1722	*D11	R2003	E8	R3701	*H5	R4822	*H11	RB818	P3	TP209	C3
R317	*K1	R525	*L5	R641	F11	R783	L8	R908	L2	R1019	*F2	R1522	N7	R1620	*P8	R1723	*J4	R2004	E8	R3702	G5	R4823	*H11	RB819	P3	TP210	C4
R318	*K1	R526	L5	R642	F12	R784	L8	R909	L2	R1020	*F2	R1523	*N7	R1621	*P8	R1724	*E8	R2005	E5	R3703	G5	R4901	G8	RB820	P3	TP211	C8
R319	*K1	R527	L5	R643	H9	R785	L8	R910	L2	R1021	*F2	R1524	*N7	R1622	*P8	R1725	*E7	R2006	E5	R3704	G5	R4902	G8	RB821	P3	TP401	L13
R320	K1	R528	*L5	R644	H7	R786	L7	R911	L2	R1022	*F2	R1525	N7	R1623	*P8	R1726	*E6	R2007	H4	R3705	G5	R4903	*J8	RB822	P2	TP402	L13
R321	K1	R529	L5	R645	M11	R787	L7	R912	L2	R1023	E2	R1526	*P7	R1624	*N8	R1727	*E7	R2008	H4	R3706	H5	R4904	*J8	RB823	P2	TP403	L13
R322	*K1	R530	L6	R646	N11	R788	L7	R913	L2	R1024	F2	R1527	*N7	R1625	*P8	R1728	*E6	R2101	*H8	R3801	*H3	R4905	*H8	RB824	P2	TP404	R9
R323	*K1	R531	L5	R647	J3	R789	L7	R914	L2	R1025	F2	R1528	*N7	R1626	*N8	R1729	*E5	R2102	*H8	R3802	H3	R4906	*H7	RB825	*P3	TP501	R8
R324	*K1	R532	L6	R648	J5	R790	L7	R915	L3	R1026	F2	R1529	*N7	R1627	*P8	R1730	*E5	R2103	N10	R3803	K3	R4909	*J8	RB826	*P3	TP502	B13
R325	*K1	R533	K5	R649	J11	R791	L7	R916	L3	R1027	F2	R1530	*N7	R1628	*N8	R1731	*E4	R2104	N10	R3804	K3	R4910	*J8	RB827	*P3	TP503	B12
R326	J1	R534	K2	R650	G10	R792	L7	R917	L3	R1028	F2	R1531	N7	R1629	*P8	R1732	*E4	R2105	*J11	R3805	*J3	R4911	*H8	RB828	*P3	TP601	C12
R327	J1	R535	L6	R651	G10	R793	L8	R918	L3	R1029	*F2	R1532	*P7	R1630	K1	R1733	*E3	R2106	*G11	R3806	K3	R4912	*H9	RB829	*P2	TP602	D13
R328	*J1	R536	L6	R652	G10	R794	L8	R919	L3	R1030	F2	R1533	*P7	R1631	*N8	R1734	*E6	R2107	N12	R3807	K3	R4913	*H9	RB830	*P2	TP603	D13
R329	*J1	R537	B13	R653	G10	R795	L8	R920	L3	R1031	*E2	R1534	*N7	R1632	*P8	R1735	*E3	R2201	*H9	R3808	J3	R5101	*D11	RB831	*P2	TP604	D13
R330	*J1	R538	B12	R654	G10	R796	L8	R921	L3	R1032	*E2	R1535	*N7	R1633	P8	R1736	*E6	R2202	H10	R3901	*J3	R5102	*D11	RB832	*P3	TP605	D13
R331	*J1	R539	L8	R655	G10	R797	L8	R922	L3	R1033	*E2	R1536	N7	R1634	P8	R1737	*E3	R2203	G10	R3902	J3	R5103	F10	RB833	*P3	TP901	R3
R332	J1	R540	M8	R656	G10	R798	L8	R923	L3	R1034	*E2	R1537	*P7	R1635	N8	R1738	*E6	R2204	H10	R3903	*J3	R5104	F10	RB834	*P3	TP902	L4
R333	J1	R541	M8	R657	G10	R799	L8	R924	R2	R1035	*F2	R1538	*P7	R1636	P8	R1739	*E4	R2205	G10	R3904	J3	R5105	*D10	RB1101	N6		
R334	*J1	R542	M8	R658	F12	R800	L8	R925	R3	R1036	*F2	R1539	N7	R1637	K1	R1751	*G11	R2206	H10	R4001	*J5	R5106	*D10	RB1102	N6	X501	L8
R335	*J1	R543	M8	R659	F12	R801	L8	R926	R3	R1037	*F2	R1540	*P7	R1638	N8	R1752	*G11	R2301	*H9	R4002	J5	R5107	*D11	RB1103	N6	X1001	F2
R336	*J1	R544	L5	R660	F12	R802	L8	R927	*R2	R1038	*F2	R1541	P8	R1639	P8	R1753	*J11	R2302	H10	R4003	*J5	R5108	*D11	RB1104	N6		
R337	*J1	R545	L6	R661	F12	R803	L8	R928	*R2	R1039	F1	R1542	*P8	R1640	P8	R1754	*J11	R2303	*J9	R4004	J5	R5109	*E11	RB1105	N6		
R338	J1	R546	K6	R701	L8	R804	L7	R929	R3	R1040	E1	R1543	J1	R1641	P8	R1755	*G12	R2304	J10	R4101	*H5	R5110	*E11	RB1106	P6		
R339	J1	R547	L5	R702	M7	R805	*M7	R930	R3	R1041	*E2	R1544	J1	R1642	*N8	R1756	*G12	R2401	*E12	R4102	*H5	R5111	*D11	RB1107	P6		
R340	*H1	R548	L6	R703	M7	R806	L7	R931	*R2	R1042	E2	R1545	P8	R1643	P8	R1757	*G11	R2402	E12	R4103	*H5	R5112	*D11	RB1108	*P3		
R341	*H1	R549	K6	R706	M8	R807	L7	R932	*R2	R1301	M3	R1546	P8	R1644	*N8	R1758	*G11	R2403	D12	R4104	*H5	R5113	*D11	RB1109	*P3		
R342	*H1	R550	B12	R707	M8	R808	L7	R933	R3	R1302	M4	R1547	N7	R1645	P8	R1759	*J12	R2404	D12	R4105	*H5	R5301	*E3	RB1110	*P3		
R343	*H1	R551	B12	R708	P4	R809	L7	R934	R3	R1303	M4	R1548	N7	R1646	N8	R1760	*J12	R2405	*E12	R4201	*H7	R5302	*E3	RB1111	*P3		
R344	*H1	R552	M8	R709	M8	R810	L7	R935	*R2	R1304	M4	R1549	P8	R1647	P8	R1761	*J11	R2406	D12	R4202	H7	R5303	*E5	RB1112	M7		
R345	J1	R553	M8	R710	M8	R811	L7	R936	*R2	R1305	M4	R1550	P8	R1648	P8	R1762	*J11	R2407	D12	R4203	J7	R5304	*E5	RB1113	M7		
R346	J1	R554	M8	R712	M8	R812	L8	R937	K2	R1306	L6	R1551	J1	R1649	P8	R1763	*G11	R2408	E12	R4204	J7	R5305	*E4	RB1114	M7		
R347	*H1	R555	M8	R713	L8	R813	L7	R938	K3	R1307	M5	R1552	J1	R1650	N8	R1764	*G11	R2501	*D12	R4205	*H7	R5306	*E3	RB1115	N7		
R348	*H1	R556	M8	R714	M8	R814	J1	R939	K2	R1308	M5	R1553	N7	R1651	P8	R1765	*J11	R2502	D12	R4206	J7	R5307	*E3	RB1116	M4		
R349	*H1	R557	M8	R715	M8	R815	L7	R940	K3	R1309	M5	R1554	N7	R1652	P8	R1766	*J11	R2503	*E12	R4207	J7	R5308	*D4	RB1117	M4		

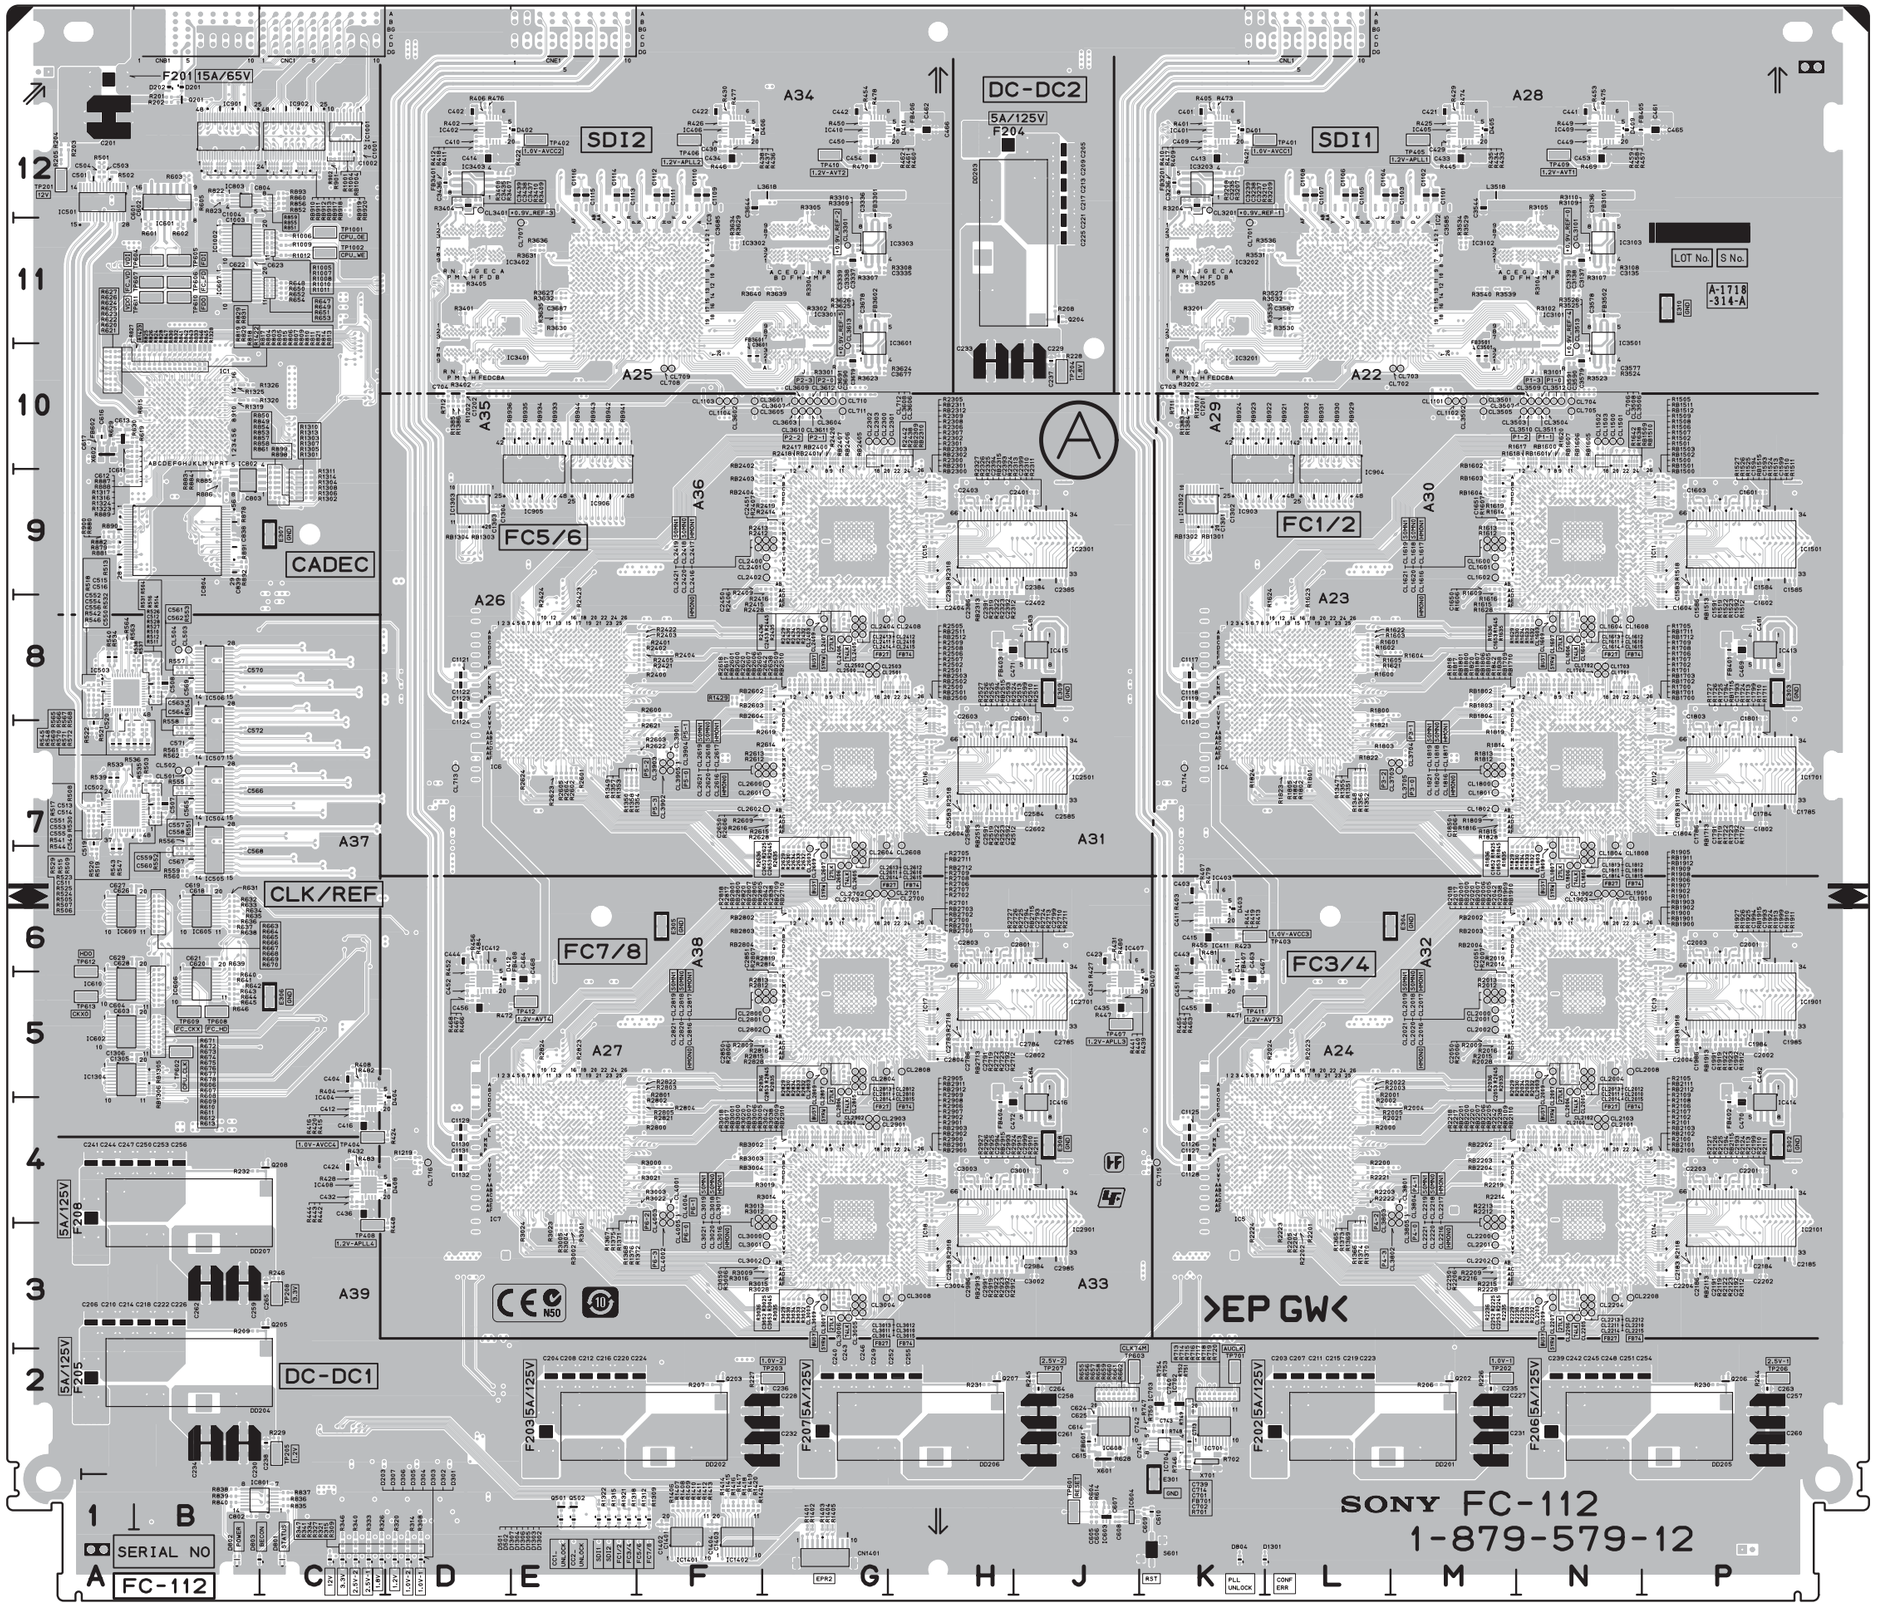

FC-112 -A SIDE-
SUFFIX: -12

MVS-8000X/7000X

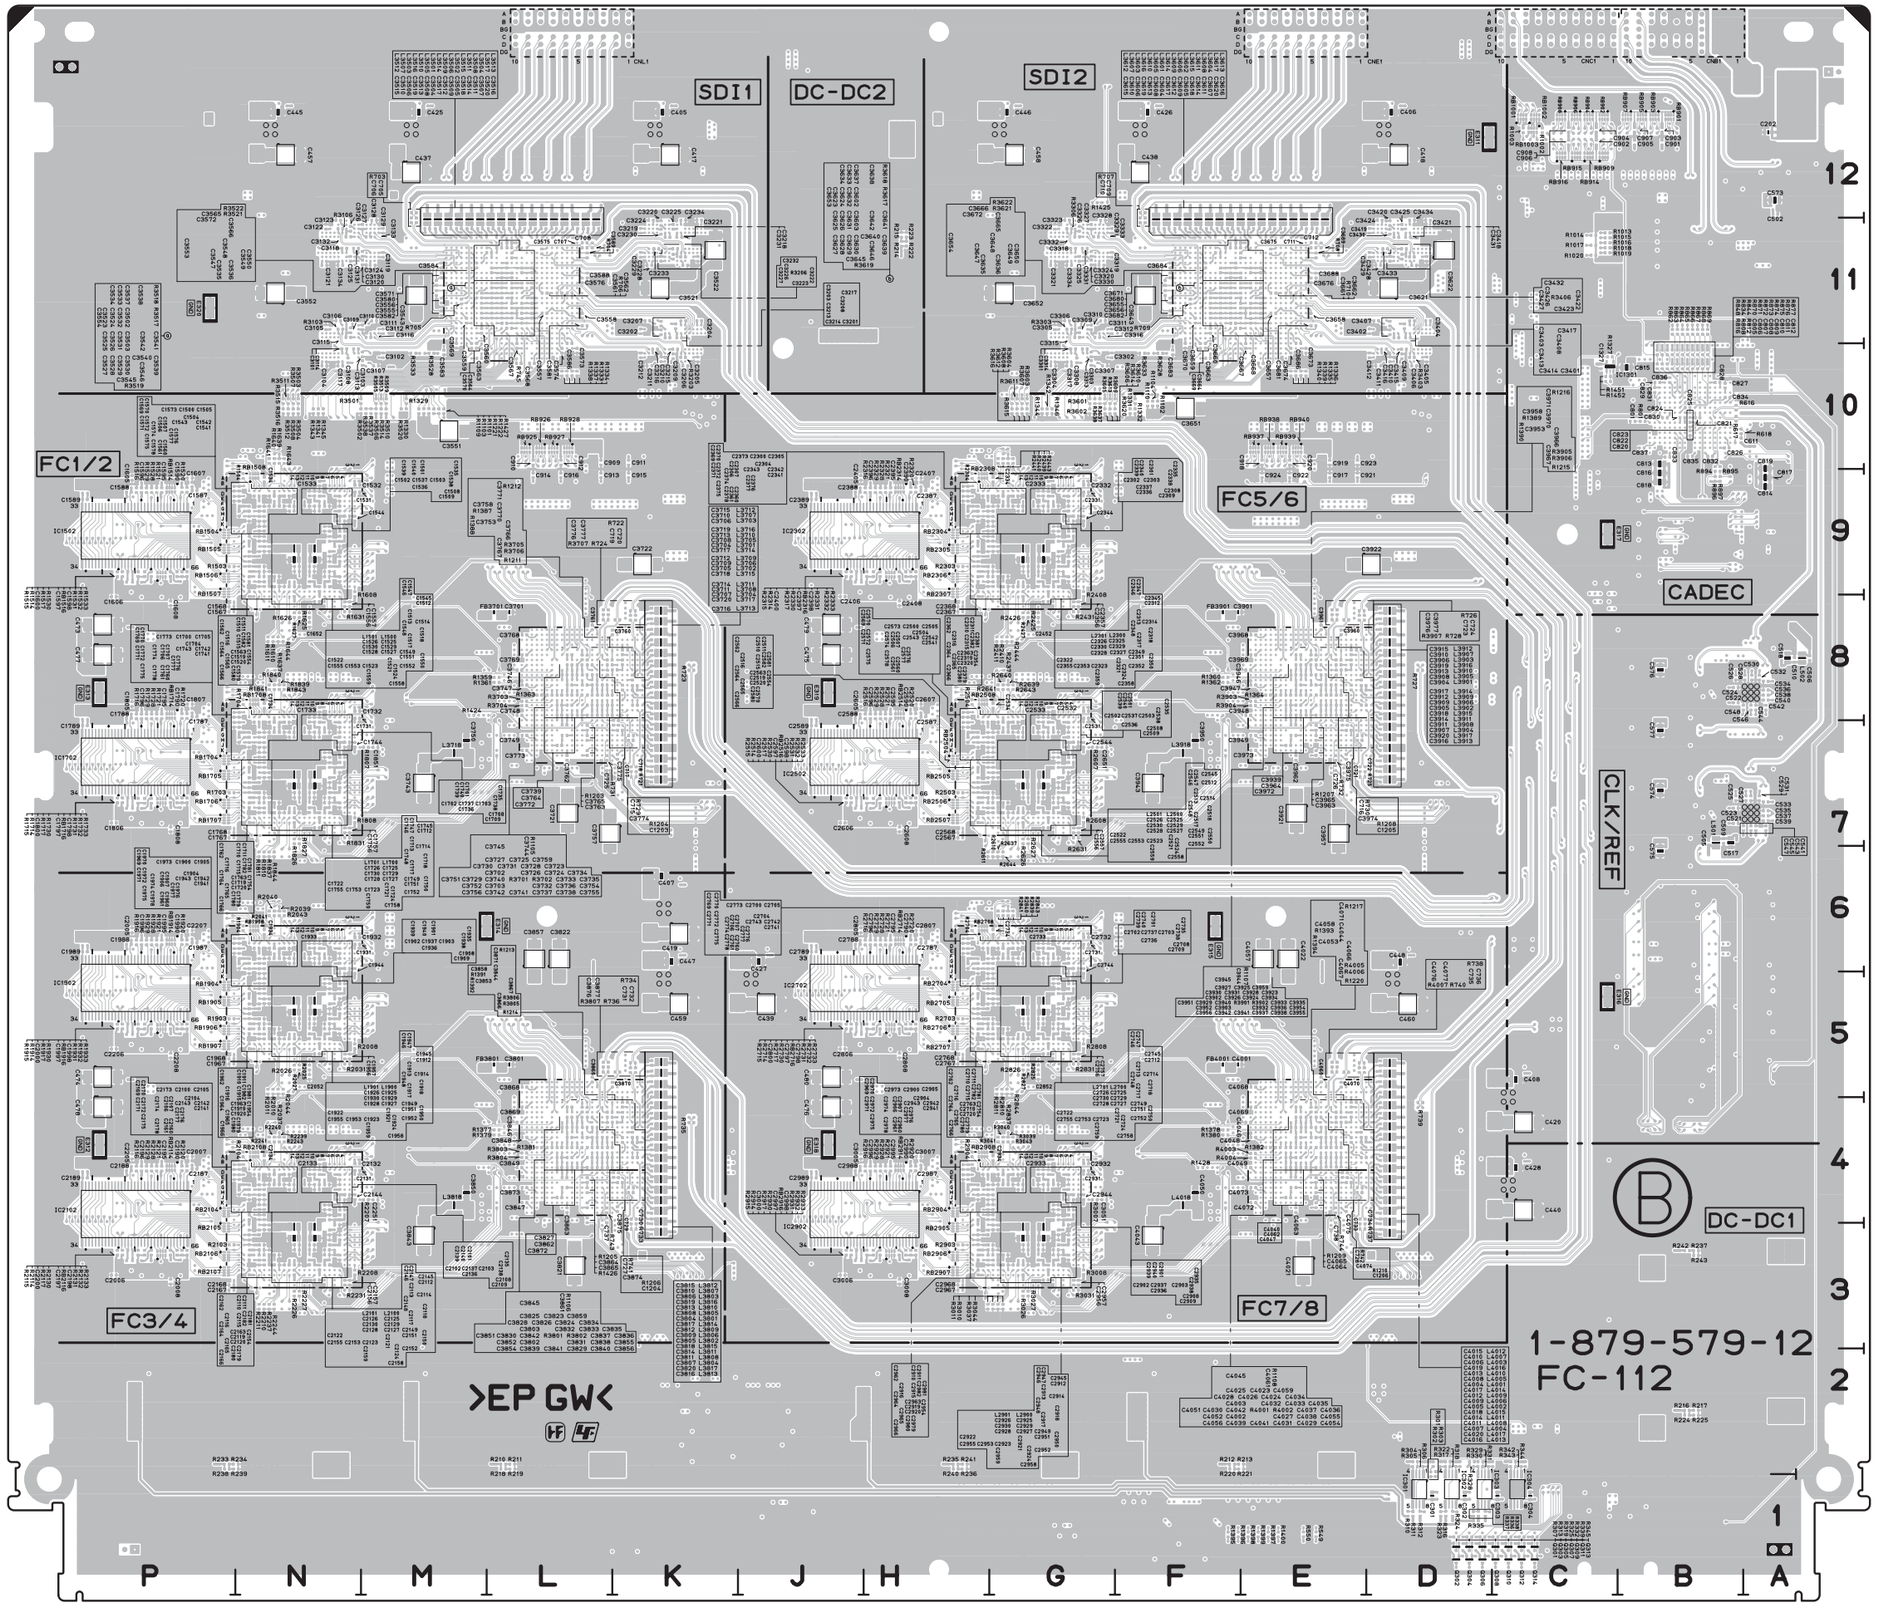

FC-112 -B SIDE-
SUFFIX: -12

FC-112 (1-879-579-12)
---
*:B SIDE

C201	A12	C423	J6	C530	*A8	C715	*K7	C924	*E9	C1537	*N9	C1715	*N7	C1806	*P7	C1984	P5	C2162	*N4	C2340	*G9	C2518	*G7	C2650	G7	C2787	*H6	C2965	*H3	C3205	*K10
C202	*A12	C424	C4	C531	*A7	C716	*E7	C1001	C12	C1538	*N9	C1716	*N7	C1807	*P8	C1985	P5	C2163	*N3	C2341	*G9	C2519	*G7	C2651	*G7	C2788	*J6	C2966	*H3	C3206	*K10
C203	L2	C425	*M12	C532	*A8	C717	*K7	C1002	C12	C1539	*N9	C1717	*N7	C1808	*P7	C1986	P5	C2164	*N3	C2342	*G9	C2520	*G7	C2652	G6	C2789	*J6	C2967	*H3	C3207	*K11
C204	E2	C426	*F12	C533	*A7	C718	*K7	C1003	B11	C1540	*N9	C1718	*N7	C1850	M7	C1987	*P6	C2165	*N3	C2343	*G9	C2521	*G7	C2653	G6	C2790	*H6	C2968	*H3	C3208	*K11
C205	J12	C427	*J6	C534	*A8	C719	*K8	C1004	B12	C1541	*N9	C1719	*N7	C1851	*M7	C1988	*P6	C2166	*N3	C2344	*G9	C2522	*G7	C2700	*G6	C2791	H5	C2969	*H4	C3209	*K10
C206	A3	C428	*C4	C535	*A7	C720	*K8	C1101	M12	C1542	*N9	C1720	*N7	C1852	N6	C1989	*P6	C2167	*P3	C2345	*G9	C2523	*G7	C2701	*G6	C2792	H5	C2970	*H4	C3210	*K10
C207	L2	C429	M12	C536	*A8	C721	*E7	C1102	M12	C1543	*N9	C1721	*N7	C1853	N6	C1990	*P6	C2168	*P3	C2346	*G9	C2524	*G7	C2702	*G6	C2793	H6	C2971	*H4	C3211	*K10
C208	E2	C430	F12	C537	*A7	C722	*E7	C1103	M12	C1544	*N9	C1722	*N7	C1900	*N6	C1991	P5	C2169	*P4	C2347	*G9	C2525	*G7	C2703	*G6	C2794	H6	C2972	*H4	C3212	*K10
C209	J12	C431	J5	C538	*A8	C723	*E8	C1104	L12	C1545	*N9	C1723	*N7	C1901	*N6	C1992	P5	C2170	*N4	C2348	*G9	C2526	*G7	C2704	*G6	C2795	*H6	C2973	*H4	C3213	*K11
C210	A3	C432	C4	C539	*A7	C724	*E8	C1105	L12	C1546	*N9	C1724	*N7	C1902	*N6	C1993	P6	C2171	*P4	C2349	*G9	C2527	*G7	C2705	*G6	C2796	*H6	C2974	*H4	C3214	*K11
C211	L2	C433	M12	C540	*A8	C725	*L7	C1106	L12	C1547	*N9	C1725	*N7	C1903	*N6	C1994	P6	C2172	*N4	C2350	*G9	C2528	*G7	C2706	*H6	C2797	*H5	C2975	*H4	C3215	*K10
C212	E2	C434	F12	C541	*A7	C726	*E7	C1107	L12	C1548	*N9	C1726	*N7	C1904	*N6	C1995	*P6	C2173	*N4	C2351	*G9	C2529	*G7	C2707	*G6	C2798	*H5	C2976	*G4	C3216	*K10
C213	J12	C435	J5	C542	*A8	C727	*K4	C1108	L12	C1549	*N9	C1727	*N7	C1905	*N6	C1996	*P6	C2174	*N4	C2352	*G9	C2530	*G7	C2708	*G6	C2799	J6	C2977	*H4	C3217	*K11
C214	A3	C436	C4	C543	*A7	C728	*E4	C1109	F12	C1550	*N9	C1728	*N7	C1906	*N6	C1997	*P5	C2175	*N4	C2353	*G9	C2531	*G8	C2709	*G5	C2800	*J5	C2978	*H4	C3218	*K11
C215	L2	C437	*M12	C544	*A8	C729	*K4	C1110	F12	C1551	*N9	C1729	*N7	C1907	*N6	C1998	*P5	C2176	*N4	C2354	*G9	C2532	*G8	C2710	*H5	C2801	J6	C2979	*G3	C3219	*K11
C216	E2	C438	*F12	C545	*A7	C730	*K4	C1111	F12	C1552	*N9	C1730	*N7	C1908	*N6	C1999	P6	C2177	*N4	C2355	*G9	C2533	*G8	C2711	*G5	C2802	J5	C2980	*H3	C3220	*K11
C217	J12	C439	*J5	C546	*A8	C731	*K5	C1112	F12	C1553	*N9	C1731	*N8	C1909	*N5	C2000	*P5	C2178	*N4	C2356	*G8	C2534	*G8	C2712	*G5	C2803	H6	C2981	*G3	C3221	*K11
C218	B3	C440	*C4	C547	*B7	C732	*K5	C1113	E12	C1554	*N9	C1732	*N8	C1910	*N5	C2001	P6	C2179	*N3	C2357	*G8	C2535	*G7	C2713	*G5	C2804	H5	C2982	*G3	C3222	*K11
C219	L2	C441	N12	C548	*B8	C733	*E4	C1114	E12	C1555	*N9	C1733	*N8	C1911	*N5	C2002	P5	C2180	*N3	C2358	*G8	C2536	*G7	C2714	*G5	C2805	*J6	C2983	H3	C3223	*K11
C220	E2	C442	G12	C549	A7	C734	*E4	C1115	E12	C1556	*N8	C1734	*N8	C1912	*N5	C2003	P6	C2181	*N3	C2359	*G9	C2537	*G7	C2715	*H5	C2806	*J5	C2984	J3	C3224	*K11
C221	J11	C443	K6	C550	A8	C735	*E5	C1116	E12	C1557	*N8	C1735	*N7	C1913	*N5	C2004	P5	C2182	*N3	C2360	*G9	C2538	*G7	C2716	*H5	C2807	*H6	C2985	J3	C3225	*K11
C222	B3	C444	D6	C551	A7	C736	*E5	C1117	K8	C1558	*N8	C1736	*N7	C1914	*N5	C2005	*P6	C2183	P3	C2361	*H9	C2539	*G8	C2717	*G5	C2808	*H5	C2986	H3	C3226	*K11
C223	L2	C445	*N12	C552	A8	C737	*L4	C1118	K8	C1559	*N9	C1737	*N7	C1915	*N5	C2006	*P3	C2184	P3	C2362	*H9	C2540	*G8	C2718	*G5	C2850	G5	C2987	*H4	C3227	*K11
C224	F2	C446	*G12	C553	A7	C738	*E4	C1119	K8	C1560	*N9	C1738	*N7	C1916	*N5	C2007	*P4	C2185	P3	C2363	*G9	C2541	*G7	C2719	*G5	C2851	G5	C2988	*J4	C3228	*K11
C225	J11	C447	*K6	C554	A8	C739	K2	C1120	K8	C1561	*N9	C1739	*N8	C1917	*N5	C2008	*P3	C2186	P3	C2364	*H9	C2542	*G7	C2720	*G5	C2852	*G5	C2989	*J4	C3229	*K11
C226	B3	C448	*D6	C555	A7	C740	K2	C1121	D8	C1562	*N9	C1740	*N8	C1918	*N5	C2050	M5	C2187	*P4	C2365	*H9	C2543	*G7	C2721	*G5	C2853	G5	C2990	*H4	C3230	*K11
C227	M2	C449	N12	C556	A8	C741	K2	C1122	D8	C1563	*N9	C1741	*N7	C1919	*N5	C2051	M5	C2188	*P4	C2366	*H9	C2544	*G7	C2722	*G5	C2900	*G4	C2991	H3	C3231	*K11
C228	G2	C450	G12	C557	B7	C742	K2	C1123	D8	C1564	*N9	C1742	*N7	C1920	*N5	C2052	*N5	C2189	*P4	C2367	*H8	C2545	*G7	C2723	*G5	C2901	*G4	C2992	H3	C3232	*K11
C229	J10	C451	K5	C558	B7	C743	K2	C1124	D8	C1565	*N9	C1743	*N7	C1921	*N5	C2053	N5	C2190	*P4	C2368	*H8	C2546	*G7	C2724	*G5	C2902	*G4	C2993	H4	C3233	*K11
C230	B2	C452	D5	C559	B6	C801	*B10	C1125	K4	C1566	*N9	C1744	*N7	C1922	*N5	C2100	*N4	C2191	P3	C2369	*H9	C2547	*G7	C2725	*G5	C2903	*G4	C2994	H4	C3234	*K11
C231	M2	C453	N12	C560	B6	C802	B1	C1126	K4	C1567	*P8	C1745	*N7	C1923	*N5	C2101	*N4	C2192	P3	C2370	*H9	C2548	*G7	C2726	*G5	C2904	*G4	C2995	*H4	C3235	K12
C232	G2	C454	G12	C561	B8	C803	B9	C1127	K4	C1568	*P8	C1746	*N7	C1924	*N5	C2102	*N4	C2193	P4	C2371	*H9	C2549	*G7	C2727	*G5	C2905	*G4	C2996	*H4	C3236	K12
C233	H10	C455	K5	C562	B8	C804	B12	C1128	K4	C1569	*P9	C1747	*N7	C1925	*N5	C2103	*N4	C2194	P4	C2372	*H9	C2550	*G7	C2728	*G5	C2906	*H4	C2997	*H3	C3237	K12
C234	B2	C456	D5	C563	B7	C805	*B10	C1129	D4	C1570	*N9	C1748	*N7	C1926	*N5	C2104	*N4	C2195	*P4	C2373	*H9	C2551	*G7	C2729	*G5	C2907	*G4	C2998	*H3	C3238	K12
C235	M2	C457	*N12	C564	B7	C806	*B10	C1130	D4	C1571	*P9	C1749	*N7	C1927	*N5	C2105	*N4	C2196	*P4	C2374	*H9	C2552	*G7	C2730	*G5	C2908	*G4	C2999	J4	C3239	K12
C236	G2	C458	*G12	C565	B7	C807	*B10	C1131	D4	C1572	*N9	C1750	*N7	C1928	*N5	C2106	*N4	C2197	*P3	C2375	*H9	C2553	*G7	C2731	*G6	C2909	*G4	C3000	*J3	C3301	*G10
C237	J10	C459	*K5	C566	B7	C808	*B10	C1132	D4	C1573	*N9	C1751	*N7	C1929	*N5	C2107	*N4	C2198	*P3	C2376	*G9	C2554	*G7	C2732	*G6	C2910	*H4	C3001	J4	C3302	*G10
C238	C2	C460	*D5	C567	B6	C809	*B10	C1201	K10	C1574	*N9	C1752	*N7	C1930	*N5	C2108	*N4	C2199	P4	C2377	*H9	C2555	*G7	C2733	*G6	C2911	*G4	C3002	J3	C3303	*G10
C239	N2	C461	P12	C568	B6	C810	*B10	C1202	D10	C1575	*N9	C1753	*N7	C1931	*N6	C2109	*N4	C2200	*P3	C2378	*H9	C2556	*G7	C2734	*G6	C2912	*G4	C3003	H4	C3304	*G10
C240	G2	C462	H12	C569	B8	C811	*B10	C1203	*K7	C1576	*N9	C1754	*N7	C1932	*N6	C2110	*N4	C2201	P4	C2379	*G9	C2557	*G7	C2735	*G6	C2913	*G4	C3004	H3	C3305	*G11
C241	A4	C463	K5	C570	B8	C812	*B10	C1204	*K4	C1577	*N9	C1755	*N7	C1933	*N6	C2111	*N4	C2202	P3	C2380	*H9	C2558	*G7	C2736	*G6	C2914	*G3	C3005	*J4	C3306	*G11
C242	N2	C464	E5	C571	B7	C813	*B10	C1205	*E7	C1578	*N9	C1756	*N7	C1934	*N6	C2112	*N4	C2203	P4	C2381	*G9	C2559	*G7	C2737	*G6	C2915	*H3	C3006	*J3	C3307	*G10
C243	G2	C465	P12	C572	B7	C814	*A9	C1206	*E4	C1579	*N9	C1757	*N7	C1935	*N6	C2113	*N4	C2204	P3	C2382	*G9	C2560	*G7	C2738	*G6	C2916	*H3	C3007	*H4	C3308	*G10
C244	A4	C466	H12	C573	*A12	C815	*B10	C1301	K9	C1580	*N9	C1758	*N7	C1936	*N6	C2114	*N3	C2205	*P4	C2383	H9	C2561	*H7	C2739	*G6	C2917	*G3	C3008	*H3	C3309	*G11
C245	N2	C467	K5	C574	*B7	C816	*B9	C1302	K9	C1581	*N9	C1759	*N7	C1937	*N6	C2115	*N3	C2206	*P5	C2384	J9	C2562	*H7	C2740	*G6	C2918	*G3	C3050	G3	C3310	*G11
C246	G2	C468	E5	C575	*B6	C817	*A9	C1303	D9	C1582	*N9	C1760	*N7	C1938	*N6	C2116	*N3	C2207	*P6	C2385	J9	C2563	*G7	C2741	*G6	C2919	*G3	C3051	*G4	C3311	*G11
C247	A4	C469	P8	C576	*B8	C818	*B9	C1304	D9	C1583	P9	C1761	*N7	C1939	*N6	C2117	*N3	C2208	*P5	C2386	H9	C2564	*H7	C2742	*G6	C2920	*G3	C3052	G3	C3312	*G11
C248	N2	C470	P4	C577	*B7	C819	*A10	C1305	B5	C1584	P9	C1762	*N7	C1940	*N6	C2118	*N3	C2250	M3	C2387	*H9	C2565	*H7	C2743	*G6	C2921	*G3	C3053	G3	C3313	*G10
C249	G2	C471	H8	C601	B12	C820	*B10	C1306	B5	C1585	P9	C1763	*N7	C1941	*N6	C2119	*N3	C2251	*M4	C2388	*J9	C2566	*H7	C2744	*G6	C2922	*G3	C3101	*N10	C3314	*G10
C250	B4	C472	H4	C602	B12	C821	*B10	C1327	*C10	C1586	P9	C1764	*N7	C1942	*N6	C2120	*N3	C2252	N3	C2389	*J9	C2567	*H7	C2745	*G5	C2923	*G3	C3102	*M10	C3315	*G11
C251	N2	C473	*P8	C603	B5	C822	*B10	C1401	F1	C1587	*P9	C1765	*N7	C1943	*N6	C2121	*N3	C2253	N3	C2390	*H9	C2568	*H7	C2746	*G5	C2924	*G3	C3103	*M10	C3316	*G11
C252	H2	C474	*P5	C604	B5	C823	*B10	C1402	F1	C1588	*P9	C1766	*N7	C1944	*N6	C2122	*N3	C2300	*G9	C2391	H9	C2569	*H8	C2747	*G5	C2925	*G3	C3104	*N10	C3317	*G10
C253	B4	C475	*J8	C605	J1	C824	*B10	C1403	F1	C1589	*P9	C1767	*P7	C1945	*N5	C2123	*N3	C2301	*G9	C2392	H9	C2570	*H8	C2748	*G5	C2926	*G3	C3105	*N11	C3318	*G11
C254	P2	C476	*J4	C606	J1	C825	*B10	C1404	F1	C1590	*P9	C1768	*P7	C1946	*N5	C2124	*N3	C2302	*G9	C2393	H9	C2571	*H7	C2749	*G5	C2927	*G3	C3106	*N11	C3319	*G11
C255	H2	C477	*P8	C607	J1	C826	*B10	C1500	*N9	C1591	P9	C1769	*P8	C1947	*N5	C2125	*N3	C2303	*G9	C2394	H9	C2572	*H7	C2750	*G5	C2928	*G3	C3107	*M10	C3320	*G11
C256	B4	C478	*P4	C608	J1	C827	*B10	C1501	*N9	C1592	P9	C1770	*N8	C1948	*N5	C2126	*N3	C2304	*G9	C2395	*H9	C2573	*H7	C2751	*G5	C2929	*G3	C3108	*N10	C3321	*G11
C257	P2	C479	*J8	C609	K1	C828	*B10	C1502	*N9	C1593	P9	C1771	*P7	C1949	*N5	C2127	*N3	C2305	*G9	C2396	*H9	C2574	*H7	C2752	*G5	C2930	*G3	C3109	*N11	C3322	*G11
C258	J2	C480	*J5	C610	K1	C829	*B10	C1503	*N9	C1594	P9	C1772	*N7	C1950	*N5	C2128	*N3	C2306	*H9	C2397	*H9	C2575	*H7	C2753	*G5	C2931	*G4	C3110	*M11	C3323	*G11
C259	B3	C481	P8	C611	*B10	C830	*B10	C1504	*N9	C1595	*P9	C1773	*N7	C1951	*N5	C2129	*N3	C2307	*G9	C2398	*H9	C2576	*G7	C2754	*G5	C2932	*G4	C3111	*M11	C3324	*G11
C260	P2	C482	P5	C612	B10	C831	*B10	C1505	*N9	C1596	*P9	C1774	*N7	C1952	*N5	C2130	*N3	C2308	*G9	C2399	J9	C2577	*H7	C2755	*G5	C2933	*G4	C3112	*M11	C3325	*G11
C261	J2	C483	J8	C613	A10	C832	*B10	C1506	*N9	C1597	*P9	C1775	*N7	C1953	*N5	C2131	*N4	C2309	*G9	C2400	*J9	C2578	*H7	C2756	*G5	C2934	*G4	C3113	*M10	C3326	*G11
C262	B3	C484	J5	C614	J2	C833	*B10	C1507	*N9	C1598	*P9	C1776	*N7	C1954	*N5	C2132	*N4	C2310	*H9	C2401	J9	C2579	*G7	C2757	*G5	C2935	*G4	C3114	*N10	C3327	*G11
C263	P2	C501	A12	C615	J2	C834	*B10	C1508	*N9	C1599	P9	C1777	*N7	C1955	*N5	C2133	*N4	C2311	*G9	C2402	J8	C2580	*H7	C2758	*G5	C2936	*G4	C3115	*N11	C3328	*G11
C264	J2	C502	*A12	C616	A10	C835	*B10	C1509	*N9	C1600	*P9	C1778	*N7	C1956	*N5	C2134	*N4	C2312	*G9	C2403	H9	C2581	*G7	C2759	*G5	C2937	*G4	C3116	*M11	C3329	*G11
C265	C3	C503	A12	C617	A10	C836	*B10	C1510	*N9	C1601	P9	C1779	*N7	C1957	*N5	C2135	*N4	C2313	*G9	C2404	H8	C2582	*G7	C2760	*G5	C2938	*G4	C3117	*N10	C3330	*G11
C301	*D1	C504	A12	C618	B6	C837	*B10	C1511	*N9	C1602	P8	C1780	*N7	C1958	*N5	C2136	*N4	C2314	*G9	C2405	*J9	C2583	H7	C2761	*H5	C2939	*G4	C3118	*N11	C3331	*G11
C302	*D1	C505	*B7	C619	B6	C838	B9	C1512	*N9	C1603	P9	C1781	*N7	C1959	*N5	C2137	*N4	C2315	*H9	C2406	*J8	C2584	J7	C2762	*H5	C2940	*G4	C3119	*M11	C3332	*G11
C303	*C1	C506	*A8	C620	B6	C839	B9	C1513	*N9	C1604	P8	C1782	*N7	C1960	*N5	C2138	*N4	C2316	*H9	C2407	*H9	C2585	J7	C2763	*G5	C2941	*G4	C3120	*M11	C3333	*G11
C304	*C1	C507	B7	C621	B6	C901	*B12	C1514	*N9	C1605	*P9	C1783	P7	C1961	*N5	C2139	*N4	C2317	*G9	C2408	*H8	C2586	H7	C2764	*H5	C2942	*G4	C3121	*N11	C3334	*G11
C401	K12	C508	B8	C622	B11	C902	*C12	C1515	*N9	C1606	*P8	C1784	P7	C1962	*N5	C2140	*N4	C2318	*G9	C2450	G9	C2587	*H8	C2765	*H5	C2943	*G4	C3122	*N11	C3335	G11
C402	D12	C509	*B7	C623	B11	C903	*B12	C1516	*N9	C1607	*P9	C1785	P7	C1963	*N5	C2141	*N4	C2319	*G9	C2451	G9	C2588	*J8	C2766	*H5	C2944	*G4	C3123	*N11	C3336	G12
C403	K6	C510	*A8	C624	J2	C904	*C12	C1517	*N9	C1608	*P8	C1786	P7	C1964	*N5	C2142	*N4	C2320	*G9	C2452	*G8	C2589	*J7	C2767	*H5	C2945	*G4	C3124	*M11	C3337	G11
C404	C5	C511	B7	C625	J2	C905	*B12	C1518	*N9	C1650	M9	C1787	*P8	C1965	*N5	C2143	*N4	C2321	*G9	C2453	G8	C2590	*H8	C2768	*H5	C2946	*G4	C3125	*N11	C3338	G11
C405	*K12	C512	B8	C626	B6	C906	*C12	C1519	*N9	C1651	M9	C1788	*P8	C1966	*N5	C2144	*N4	C2322	*G9	C2500	*G7	C2591	H7	C2769	*H6	C2947	*G4	C3126	*N11	C3339	G11
C406	*D12	C513	A7	C627	B6	C907	*B12	C1520	*N9	C1652	*N8	C1789	*P7	C1967	*P5	C2145	*N4	C2323	*G9	C2501	*G8	C2592	H7	C2770	*H6	C2948	*G3	C3127	*M11	C3401	*D11
C407	*K6	C514	A7	C628	B6	C908	*C12	C1521	*N9	C1653	N8	C1790	*P8	C1968	*P5	C2146	*N4	C2324	*G9	C2502	*G7	C2593	H7	C2771	*H6	C2949	*G3	C3128	*M11	C3402	*D11
C408	*C5	C515	A8	C629	B6	C909	*L10	C1522	*N9	C1700	*N7	C1791	P7	C1969	*P6	C2147	*N4	C2325	*G9	C2503	*G7	C2594	H7	C2772	*H6	C2950	*G3	C3129	*M11	C3403	*D11
C409	K12	C516	A8	C701	K2	C910	*L10	C1523	*N9	C1701	*N8	C1792	P7	C1970	*N6	C2148	*N3	C2326	*G9	C2504	*G7	C2595	*H8	C2773	*H6	C2951	*G3	C3130	*M11	C3404	*D11
C410	D12	C517	*B7	C702	K2	C911	*K10	C1524	*N9	C1702	*N7	C1793	P7	C1971	*P6	C2149	*N3	C2327	*G9	C2505	*G7	C2596	*H8	C2774	*H6	C2952	*G3	C3131	*N11	C3405	*D10
C411	K6	C518	*A8	C703	K10	C912	*L10	C1525	*N9	C1703	*N7	C1794	P7	C1972	*N6	C2150	*N3	C2328	*G9	C2506	*H7	C2597	*H7	C2775	*H6	C2953	*G3	C3132	*N11	C3406	*D10
C412	C4	C519	A7	C704	D10	C913	*L9	C1526	*N9	C1704	*N7	C1795	*P8	C1973	*N6	C2151	*N3	C2329	*G9	C2507	*G7	C2598	*H7	C2776	*G6	C2954	*G3	C3133	*M11	C3407	*D11
C413	K12	C520	A7	C705	*M11	C914	*L9	C1527	*N9	C1705	*N7	C1796	*P8	C1974	*N6	C2152	*N3	C2330	*G9	C2508	*G7	C2599	J7	C2777	*H6	C2955	*G3	C3134	*N11	C3408	*D11
C414	D12	C521	*B7	C706	*M11	C915	*K9	C1528	*N9	C1706	*N7	C1797	*P7	C1975	*N6	C2153	*N3	C2331	*G9	C2509	*G7	C2600	*J7	C2778	*H6	C2956	*G3	C3135	N11	C3409	*D10
C415	K6	C522	*B8	C707	*L11	C916	*L9	C1529	*N9	C1707	*N7	C1798	*P7	C1976	*N6	C2154	*N3	C2332	*G9	C2510	*H7	C2601	J8	C2779	*G5	C2957	*G3	C3136	N12	C3410	*D10
C416	C4	C523	*B7	C708	*L11	C917	*E9	C1530	*N9	C1708	*N7	C1799	P7	C1977	*N6	C2155	*N3	C2333	*G9	C2511	*G7	C2602	J7	C2780	*H5	C2958	*G3	C3137	N11	C3411	*D10
C417	*K12	C524	*B8	C709	*F11	C918	*E10	C1531	*N9	C1709	*N7	C1800	*P7	C1978	*N6	C2156	*N3	C2334	*G9	C2512	*G7	C2603	H7	C2781	*G5	C2959	*G3	C3138	N11	C3412	*D10
C418	*D12	C525	*B7	C710	*F11	C919	*E10	C1532	*N9	C1710	*N7	C1801	P8	C1979	*N5	C2157	*N3	C2335	*G9	C2513	*G7	C2604	H7	C2782	*G5	C2960	*G4	C3139	N11	C3413	*D11
C419	*K6	C526	*B8	C711	*E11	C920	*E10	C1533	*N9	C1711	*N7	C1802	P7	C1980	*N5	C2158	*N3	C2336	*G9	C2514	*G7	C2605	*J8	C2783	H5	C2961	*H4	C3201	*K11	C3414	*D11
C420	*C4	C527	*A7	C712	*E11	C921	*E9	C1534	*N9	C1712	*N7	C1803	P7	C1981	*N5	C2159	*N3	C2337	*G9	C2515	*H7	C2606	*J7	C2784	J5	C2962	*H4	C3202	*K11	C3415	*D10
C421	M12	C528	*A8	C713	K2	C922	*E9	C1535	*N9	C1713	*N7	C1804	P7	C1982	*N5	C2160	*N4	C2338	*G9	C2516	*H7	C2607	*H8	C2785	J5	C2963	*G3	C3203	*K11	C3416	*D10
C422	F12	C529	*A7	C714	K2	C923	*E10	C1536	*N9	C1714	*N7	C1805	*P8	C1983	P5	C2161	*N4	C2339	*G9	C2517	*G7	C2608	*H7	C2786	H5	C2964	*H3	C3204	*K11	C3417	*D11

C3418	*D11	C3570	*M10	C3670	*F10	C3770	*K8	C3907	*D7	C4021	*E3	CL1605	N8	CL2218	M4	CL3005	G3	D410	H12	IC16	G7	IC3501	N10
C3419	*D11	C3571	*M11	C3671	*F11	C3771	*K8	C3908	*D8	C4022	*E6	CL1606	N8	CL2219	M4	CL3006	G3	D411	K5	IC17	G5	IC3601	G10
C3420	*D11	C3572	*L11	C3672	*F11	C3772	*L7	C3909	*D8	C4023	*E4	CL1607	N8	CL2220	M3	CL3007	G3	D412	D5	IC18	G4		
C3421	*D11	C3573	*L10	C3673	*E10	C3773	*L7	C3910	*D8	C4024	*E4	CL1608	N8	CL2221	M3	CL3008	H3	D501	E1	IC301	*D1	L501	*B7
C3422	*D11	C3574	*L10	C3674	*E10	C3774	*K7	C3911	*D7	C4025	*E4	CL1609	N8	CL2300	G10	CL3009	G3	D502	E1	IC302	*D1	L502	*A8
C3423	*D11	C3575	*L11	C3675	*E11	C3775	*K7	C3912	*D8	C4026	*E4	CL1610	N8	CL2301	H10	CL3010	G3	D801	C1	IC303	*D1	L1500	*N9
C3424	*D11	C3576	*L11	C3676	*E11	C3776	*L8	C3913	*D8	C4027	*E4	CL1611	N8	CL2302	G10	CL3011	G3	D802	B1	IC304	*C1	L1501	*N9
C3425	*D11	C3577	N10	C3677	G10	C3777	*L8	C3914	*D7	C4028	*E4	CL1612	N8	CL2303	G10	CL3012	G3	D803	C1	IC401	K12	L1700	*N7
C3426	*D11	C3578	N11	C3678	G11	C3801	*L5	C3915	*D8	C4029	*E4	CL1613	N8	CL2400	G9	CL3013	G3	D804	K1	IC402	D12	L1701	*N7
C3427	*D11	C3579	N10	C3679	G10	C3802	*L4	C3916	*D7	C4030	*E4	CL1614	N8	CL2401	G9	CL3014	G3	D1301	L1	IC403	K6	L1900	*N5
C3428	*D11	C3580	*M11	C3680	*F11	C3803	*L4	C3917	*D8	C4031	*E4	CL1615	N8	CL2402	G9	CL3015	G3	D1302	F1	IC404	C4	L1901	*N5
C3429	*D11	C3581	*L11	C3681	*E11	C3804	*K4	C3918	*D7	C4032	*E4	CL1616	M9	CL2403	G8	CL3016	G3	D1303	F1	IC405	M12	L2100	*N3
C3430	*D11	C3582	*M11	C3682	*F11	C3805	*K4	C3919	*D8	C4033	*E4	CL1617	M9	CL2404	G8	CL3017	G4	D1304	E1	IC406	F12	L2101	*N3
C3431	*D11	C3583	*M10	C3683	*F10	C3806	*K5	C3920	*D7	C4034	*E4	CL1618	M9	CL2405	G8	CL3018	G4	D1305	E1	IC407	J5	L2300	*G9
C3432	*D11	C3584	*M11	C3684	*F11	C3807	*K4	C3921	*E7	C4035	*E4	CL1619	M9	CL2406	G8	CL3019	F4	D1306	E1	IC408	C4	L2301	*G9
C3433	*D11	C3585	M11	C3685	F11	C3808	*K4	C3922	*D9	C4036	*E4	CL1620	M9	CL2407	G8	CL3020	G3	D1307	E1	IC409	N12	L2500	*G7
C3434	*D11	C3586	*L10	C3686	*E10	C3809	*K4	C3923	*E8	C4037	*E4	CL1621	M9	CL2408	H8	CL3021	F3			IC410	G12	L2501	*G7
C3435	D12	C3587	L11	C3687	E11	C3810	*K5	C3924	*E8	C4038	*E4	CL1700	N8	CL2409	G8	CL3101	N11	DD201	L2	IC411	K5	L2700	*G5
C3436	D12	C3588	*L11	C3688	*E11	C3811	*K4	C3925	*E8	C4039	*E4	CL1701	N8	CL2410	G8	CL3201	K12	DD202	F2	IC412	D5	L2701	*G5
C3437	D12	C3589	*L11	C3689	*E11	C3812	*K4	C3926	*E8	C4040	*E4	CL1702	N8	CL2411	G8	CL3301	G11	DD203	J11	IC413	P8	L2900	*G3
C3438	D12	C3590	N10	C3690	G10	C3813	*K4	C3927	*E8	C4041	*E4	CL1703	N8	CL2412	G8	CL3401	D12	DD204	B2	IC414	P4	L2901	*G3
C3439	D12	C3591	N10	C3691	G10	C3814	*K4	C3928	*E8	C4042	*E4	CL1800	M7	CL2413	G8	CL3501	M10	DD205	P2	IC415	J8	L3501	*L11
C3501	M10	C3601	F10	C3701	*L8	C3815	*K5	C3929	*E8	C4043	*F3	CL1801	M7	CL2414	G8	CL3502	M10	DD206	H2	IC416	J4	L3502	*L11
C3502	*L11	C3602	*F11	C3702	*L8	C3816	*K3	C3930	*E8	C4044	*E4	CL1802	M7	CL2415	G8	CL3503	N10	DD207	B4	IC501	A12	L3503	*M11
C3503	*L11	C3603	*F11	C3703	*L8	C3817	*K4	C3931	*E8	C4045	*E4	CL1803	N6	CL2416	G9	CL3504	N10			IC502	A7	L3504	*L11
C3504	*L11	C3604	*F11	C3704	*K8	C3818	*K4	C3932	*E8	C4046	*E4	CL1804	N7	CL2417	G9	CL3505	M10	E301	K1	IC503	A8	L3505	*M11
C3505	*L11	C3605	*E11	C3705	*K8	C3819	*K5	C3933	*E8	C4047	*E4	CL1805	N6	CL2418	G9	CL3506	N10	E302	P4	IC504	B7	L3506	*L11
C3506	*M11	C3606	*F11	C3706	*K8	C3820	*K4	C3934	*E8	C4048	*E4	CL1806	N6	CL2419	F9	CL3507	N10	E303	P8	IC505	B6	L3507	*M11
C3507	*L11	C3607	*E11	C3707	*K7	C3821	*L3	C3935	*E8	C4049	*E4	CL1807	N6	CL2420	G9	CL3508	N10	E304	M6	IC506	B8	L3508	*L11
C3508	*M11	C3608	*F11	C3708	*K8	C3822	*L6	C3936	*E8	C4050	*F4	CL1808	N7	CL2421	F9	CL3509	N10	E305	F6	IC507	B7	L3509	*L11
C3509	*L11	C3609	*E11	C3709	*K8	C3823	*L4	C3937	*E8	C4051	*E4	CL1809	N7	CL2500	G8	CL3510	N10	E306	C5	IC601	B12	L3510	*M11
C3510	*M11	C3610	*F11	C3710	*K8	C3824	*L4	C3938	*E8	C4052	*E4	CL1810	N6	CL2501	G8	CL3511	N10	E307	C9	IC602	A5	L3511	*L11
C3511	*L11	C3611	*E11	C3711	*K7	C3825	*L4	C3939	*E7	C4053	*E4	CL1811	N6	CL2502	G8	CL3512	N10	E308	J4	IC603	J1	L3512	*M11
C3512	*L11	C3612	*F11	C3712	*K8	C3826	*L4	C3940	*E8	C4054	*E4	CL1812	N7	CL2503	G8	CL3513	N10	E309	J8	IC604	J1	L3513	*L11
C3513	*M11	C3613	*F11	C3713	*K8	C3827	*L4	C3941	*E8	C4055	*E4	CL1813	N7	CL2600	G7	CL3601	F10	E310	P11	IC605	B6	L3514	*L11
C3514	*L11	C3614	*E11	C3714	*K7	C3828	*L4	C3942	*E8	C4056	*E4	CL1814	N6	CL2601	G7	CL3602	F10	E311	*D12	IC606	B5	L3515	*L11
C3515	*M11	C3615	*F11	C3715	*K8	C3829	*L4	C3943	*F7	C4057	*E6	CL1815	N6	CL2602	G7	CL3603	G10	E312	*P4	IC607	B11	L3516	*M11
C3516	*L11	C3616	*E11	C3716	*K7	C3830	*L4	C3944	*E8	C4058	*E4	CL1816	M7	CL2603	G6	CL3604	G10	E313	*P8	IC608	J2	L3517	*L11
C3517	*L11	C3617	*F11	C3717	*K8	C3831	*L4	C3945	*E8	C4059	*E4	CL1817	M7	CL2604	G7	CL3605	F10	E314	*M6	IC609	A6	L3518	M12
C3518	*L11	C3618	*E11	C3718	*K7	C3832	*L4	C3946	*E8	C4060	*E5	CL1818	M7	CL2605	G6	CL3606	G10	E315	*F6	IC610	A5	L3601	*F11
C3519	*M11	C3619	*F11	C3719	*K8	C3833	*L4	C3947	*E8	C4061	*E4	CL1819	M7	CL2606	G6	CL3607	G10	E316	*C5	IC611	A10	L3602	*E11
C3520	*L11	C3620	*E11	C3720	*K7	C3834	*L4	C3948	*E8	C4062	*E4	CL1820	M7	CL2607	G6	CL3608	G10	E317	*C9	IC701	K2	L3603	*F11
C3521	*K11	C3621	*D11	C3721	*L7	C3835	*L4	C3949	*E7	C4063	*E4	CL1821	M7	CL2608	H7	CL3609	G10	E318	*J4	IC702	K2	L3604	*E11
C3522	*K11	C3622	*D11	C3722	*K9	C3836	*L4	C3950	*F7	C4064	*E4	CL1900	N6	CL2609	G7	CL3610	G10	E319	*J8	IC703	K2	L3605	*F11
C3523	*M11	C3623	*F11	C3723	*L8	C3837	*L4	C3951	*E8	C4065	*E4	CL1901	N6	CL2610	G6	CL3611	G10	E320	*P11	IC704	K2	L3606	*E11
C3524	*L11	C3624	*F11	C3724	*L8	C3838	*L4	C3952	*E8	C4066	*E4	CL1902	N6	CL2611	G6	CL3612	G10			IC801	C1	L3607	*F11
C3525	*M11	C3625	*F11	C3725	*L8	C3839	*L4	C3953	*E8	C4067	*E4	CL1903	N6	CL2612	G7	CL3613	G10	F201	A12	IC802	B9	L3608	*E11
C3526	*L11	C3626	*F11	C3726	*L8	C3840	*L4	C3954	*E8	C4068	*E5	CL2000	M5	CL2613	G7	CL3703	M7	F202	L2	IC803	B12	L3609	*F11
C3527	*M11	C3627	*F11	C3727	*L8	C3841	*L4	C3955	*E8	C4069	*E4	CL2001	M5	CL2614	G6	CL3704	M7	F203	E2	IC804	B9	L3610	*F11
C3528	*L11	C3628	*F11	C3728	*L8	C3842	*L4	C3956	*E8	C4070	*E5	CL2002	M5	CL2615	G6	CL3705	M7	F204	H12	IC901	B12	L3611	*E11
C3529	*L11	C3629	*F11	C3729	*L8	C3843	*M3	C3957	*E7	C4071	*E4	CL2003	N5	CL2616	G7	CL3801	M4	F205	A2	IC902	C12	L3612	*F11
C3530	*L11	C3630	*F11	C3730	*L8	C3844	*K4	C3958	*E8	C4072	*E4	CL2004	N5	CL2617	G7	CL3802	M3	F206	N2	IC903	K9	L3613	*E11
C3531	*L11	C3631	*F11	C3731	*L8	C3845	*L4	C3959	*E8	C4073	*E4	CL2005	N5	CL2618	G7	CL3803	M4	F207	G2	IC904	L9	L3614	*F11
C3532	*L11	C3632	*F11	C3732	*L8	C3846	*L4	C3960	*E8	C4074	*E4	CL2006	N5	CL2619	F7	CL3804	M4	F208	A4	IC905	E9	L3615	*E11
C3533	*L11	C3633	*F11	C3733	*L8	C3847	*L4	C3961	*E8	C4075	*E4	CL2007	N5	CL2620	G7	CL3805	M3			IC906	E9	L3616	*F11
C3534	*L11	C3634	*F11	C3734	*L8	C3848	*L4	C3962	*E7	C4076	*E5	CL2008	N5	CL2621	F7	CL3901	F7	FB401	P8	IC1001	C12	L3617	*E11
C3535	*L11	C3635	*F11	C3735	*L8	C3849	*L4	C3963	*E7	C4077	*E5	CL2009	N5	CL2700	G6	CL3902	F7	FB402	P4	IC1002	B11	L3618	G12
C3536	*L11	C3636	*F11	C3736	*L8	C3850	*M4	C3964	*E7			CL2010	N5	CL2701	H6	CL3903	F7	FB403	H8	IC1301	*C10	L3701	*K8
C3537	*L11	C3637	*F11	C3737	*L8	C3851	*L4	C3965	*E7	CL501	B7	CL2011	N5	CL2702	G6	CL3904	F7	FB404	H4	IC1302	K9	L3702	*K8
C3538	*L11	C3638	*E11	C3738	*L8	C3852	*L4	C3966	*E8	CL502	B7	CL2012	N5	CL2703	G6	CL3905	F7	FB405	N12	IC1303	D9	L3703	*K8
C3539	*L11	C3639	*E11	C3739	*L7	C3853	*K4	C3967	*E8	CL503	B8	CL2013	N5	CL2800	G5	CL4001	F4	FB406	H12	IC1304	A5	L3704	*K7
C3540	*L11	C3640	*E11	C3740	*L8	C3854	*L4	C3968	*E8	CL504	B8	CL2014	N5	CL2801	G5	CL4002	F3	FB407	K5	IC1401	F1	L3705	*K8
C3541	*L11	C3641	*E11	C3741	*L8	C3855	*L4	C3969	*E8	CL701	K11	CL2015	N5	CL2802	G5	CL4003	F4	FB408	E5	IC1402	F1	L3706	*K8
C3542	*L11	C3642	*E11	C3742	*L8	C3856	*L4	C3970	*E8	CL702	M10	CL2016	M5	CL2803	G5	CL4004	F4	FB601	J2	IC1501	P9	L3707	*K8
C3543	*M11	C3643	*F11	C3743	*M7	C3857	*L6	C3971	*E8	CL703	M10	CL2017	M5	CL2804	G5	CL4005	F3	FB602	A10	IC1502	*P9	L3708	*K7
C3544	M12	C3644	F12	C3744	*L8	C3858	*L4	C3972	*E7	CL704	N10	CL2018	M5	CL2805	G5			FB701	K2	IC1701	P7	L3709	*K8
C3545	*L11	C3645	*F11	C3745	*L8	C3859	*L4	C3973	*E7	CL705	N10	CL2019	M5	CL2806	G5	CN1401	G1	FB3101	N12	IC1702	*P7	L3710	*K8
C3546	*L11	C3646	*E11	C3746	*L8	C3860	*L5	C3974	*E7	CL706	N10	CL2020	M5	CL2807	G5	CNB1	B12	FB3201	K12	IC1901	P5	L3711	*K7
C3547	*L11	C3647	*F11	C3747	*L8	C3861	*L4	C3975	*E7	CL707	E11	CL2021	M5	CL2808	H5	CNC1	C12	FB3301	G12	IC1902	*P5	L3712	*K8
C3548	*L11	C3648	*F11	C3748	*L8	C3862	*L4	C3976	*E8	CL708	F10	CL2100	N4	CL2809	G5	CNE1	E12	FB3401	D12	IC2101	P3	L3713	*K7
C3549	*L11	C3649	*E11	C3749	*L7	C3863	*L4	C3977	*E8	CL709	F10	CL2101	N4	CL2810	G5	CNL1	L12	FB3501	M10	IC2102	*P4	L3714	*K8
C3550	*L11	C3650	*E11	C3750	*M7	C3864	*L4	C4001	*F5	CL710	G10	CL2102	N4	CL2811	G5			FB3502	N11	IC2301	J9	L3715	*K7
C3551	*M10	C3651	*F10	C3751	*L8	C3865	*L4	C4002	*E4	CL711	G10	CL2103	N4	CL2812	G5	D201	B12	FB3601	F10	IC2302	*J9	L3716	*K8
C3552	*N11	C3652	*G11	C3752	*L8	C3866	*K4	C4003	*E4	CL712	G10	CL2200	M3	CL2813	G5	D202	B12	FB3602	G11	IC2501	J7	L3717	*K7
C3553	*M11	C3653	*F11	C3753	*K8	C3867	*K4	C4004	*D4	CL713	D7	CL2201	M3	CL2814	G5	D203	C1	FB3701	*L8	IC2502	*J7	L3718	*M7
C3554	*M11	C3654	*F11	C3754	*L8	C3868	*L5	C4005	*D4	CL714	K7	CL2202	M3	CL2815	G5	D301	D1	FB3801	*L5	IC2701	J5	L3801	*K4
C3555	*M11	C3655	*F11	C3755	*L8	C3869	*L4	C4006	*D5	CL715	K4	CL2203	N3	CL2816	G5	D302	D1	FB3901	*F8	IC2702	*J5	L3802	*K4
C3556	*M11	C3656	*F11	C3756	*L8	C3870	*L5	C4007	*D4	CL716	D4	CL2204	N3	CL2817	G5	D303	D1	FB4001	*F5	IC2901	J3	L3803	*K5
C3557	*L11	C3657	*E11	C3757	*L7	C3871	*K4	C4008	*D4	CL1101	M10	CL2205	N3	CL2818	G5	D304	C1			IC2902	*J4	L3804	*K4
C3558	*L11	C3658	*E11	C3758	*L8	C3872	*L4	C4009	*D4	CL1102	M10	CL2206	N3	CL2819	F5	D305	C1	IC1	B10	IC3101	N10	L3805	*K4
C3559	*M11	C3659	*F11	C3759	*L8	C3873	*L4	C4010	*D5	CL1103	F10	CL2207	N3	CL2820	G5	D306	C1	IC2	L11	IC3102	N11	L3806	*K4
C3560	*M11	C3660	*F11	C3760	*L8	C3874	*K4	C4011	*D4	CL1104	F10	CL2208	N3	CL2821	F5	D307	C1	IC3	F11	IC3103	N11	L3807	*K5
C3561	*L11	C3661	*E11	C3761	*L8	C3875	*K4	C4012	*D4	CL1500	N10	CL2209	N3	CL2900	G4	D401	K12	IC4	L8	IC3201	K10	L3808	*K4
C3562	*L11	C3662	*E11	C3762	*L7	C3876	*L5	C4013	*D4	CL1501	N10	CL2210	N3	CL2901	G4	D402	E12	IC5	L4	IC3202	K11	L3809	*K4
C3563	*M10	C3663	*F10	C3763	*L7	C3877	*L5	C4014	*D4	CL1502	N10	CL2211	N3	CL2902	G4	D403	K6	IC6	E8	IC3203	K12	L3810	*K4
C3564	*M10	C3664	*F10	C3764	*L7	C3901	*F8	C4015	*D5	CL1503	N10	CL2212	N3	CL2903	G4	D404	D4	IC7	E4	IC3301	G10	L3811	*K4
C3565	*L11	C3665	*F11	C3765	*L7	C3902	*E8	C4016	*D3	CL1600	M9	CL2213	N3	CL3000	G3	D405	M12	IC11	N9	IC3302	G11	L3812	*K5
C3566	*L11	C3666	*F11	C3766	*K8	C3903	*E8	C4017	*D4	CL1601	M9	CL2214	N3	CL3001	G3	D406	F12	IC12	N7	IC3303	G11	L3813	*K3
C3567	*L10	C3667	*E10	C3767	*K8	C3904	*D8	C4018	*D4	CL1602	M9	CL2215	N3	CL3002	G3	D407	K5	IC13	N5	IC3401	D10	L3814	*K4
C3568	*L10	C3668	*E10	C3768	*L8	C3905	*D8	C4019	*D5	CL1603	N8	CL2216	M3	CL3003	G3	D408	D4	IC14	N4	IC3402	D11	L3815	*K4
C3569	*M10	C3669	*F10	C3769	*L8	C3906	*D8	C4020	*D4	CL1604	N8	CL2217	M4	CL3004	G3	D409	N12	IC15	G9	IC3403	D12	L3816	*K5

L3817	*K4	R228	J10	R426	F12	R533	A7																
L3818	*M4	R229	C2	R427	J6	R534	A8																
L3901	*D8	R230	P2	R428	C4	R535	B7																
L3902	*D8	R231	H2	R429	M12	R536	B7																
L3903	*D8	R232	B4	R430	F12	R537	B8																
L3904	*D7	R233	*P2	R431	J6	R538	B8																
L3905	*D8	R234	*N2	R432	C4	R539	A7																
L3906	*D8	R235	*H2	R433	M12	R540	A8																
L3907	*D8	R236	*H2	R434	M12	R541	A7																
L3908	*D7	R237	*B3	R435	M12	R542	A8																
L3909	*D8	R238	*P2	R436	F12	R543	A6																
L3910	*D8	R239	*N2	R437	F12	R544	A7																
L3911	*D7	R240	*H2	R438	F12	R545	A7																
L3912	*D8	R241	*H2	R439	J5	R546	A8																
L3913	*D7	R242	*B3	R440	J5	R547	A6																
L3914	*D8	R243	*B3	R441	J5	R548	A7																
L3915	*D7	R244	P2	R442	C4	R549	*E1																
L3916	*D8	R245	J2	R443	C4	R550	*E1																
L3917	*D7	R246	C3	R444	C4	R551	B7																
L3918	*F7	R301	*D2	R445	M12	R552	B6																
L4001	*D4	R302	*D1	R446	F12	R553	B8																
L4002	*D4	R303	*D1	R447	J5	R554	B7																
L4003	*D5	R304	*D2	R448	D3	R555	B7																
L4004	*D4	R305	*D2	R449	N12	R556	B7																
L4005	*D4	R306	*D2	R450	G12	R557	B8																
L4006	*D4	R307	*D1	R451	K6	R558	B7																
L4007	*D5	R308	D1	R452	D6	R559	B6																
L4008	*D4	R309	D1	R453	N12	R560	B6																
L4009	*D4	R310	*D1	R454	G12	R561	B7																
L4010	*D4	R311	*D1	R455	K6	R562	B7																
L4011	*D4	R312	*D1	R456	D6	R563	A8																
L4012	*D5	R313	*D1	R457	N12	R564	A8																
L4013	*D3	R314	D1	R458	N12	R565	A7																
L4014	*D4	R315	D1	R459	N12	R566	A7																
L4015	*D4	R316	*D1	R460	G12	R567	B7																
L4016	*D5	R317	*D2	R461	G12	R568	B7																
L4017	*D4	R318	*D2	R462	G12	R569	A7																
L4018	*F4	R319	*D1	R463	K5	R570	B7																
		R320	D1	R464	K5	R571	B7																
Q201	B12	R321	D1	R465	K5	R572	B7																
Q202	M2	R322	*D2	R466	D5	R601	B11																
Q203	F2	R323	*D1	R467	D5	R602	B11																
Q204	J11	R324	*D1	R468	D5	R603	B12																
Q205	C3	R325	*C1	R469	N12	R604	J1																
Q206	P2	R326	C1	R470	G12	R605	B12																
Q207	H2	R327	C1	R471	K5	R606	B5																
Q208	C4	R328	*D2	R472	E5	R607	B5																
Q301	*D1	R329	*D2	R473	K12	R608	B5																
Q302	*D1	R330	*D2	R474	M12	R609	B5																
Q303	*D1	R331	*D2	R475	N12	R610	B5																
Q304	*D1	R332	*C1	R476	D12	R611	B5																
Q305	*D1	R333	C1	R477	F12	R612	B5																
Q306	*D1	R334	C1	R478	G12	R613	B5																
Q307	*C1	R335	*D1	R479	K6	R614	J1																
Q308	*C1	R336	*D1	R480	J6	R615	B10																
Q309	*C1	R337	*D1	R481	K6	R616	*B10																
Q310	*C1	R338	*D1	R482	C5	R617	*B10																
Q311	*C1	R339	*C1	R483	C4	R618	*B10																
Q312	*C1	R340	C1	R484	D6	R619	B10																
Q313	*C1	R341	C1	R501	A12	R620	A10																
Q314	*C1	R342	*C2	R502	A12	R621	A10																
Q501	E1	R343	*C2	R503	B7	R622	A10																
Q502	E1	R344	*C2	R504	B8	R623	A10																
		R345	*C1	R505	B7	R624	A10																
R201	B12	R346	C1	R506	B7	R625	A10																
R202	B12	R347	C1	R507	B7	R626	A10																
R203	A12	R401	K12	R508	A7	R627	A10																
R204	A12	R402	D12	R509	B7	R628	J2																
R205	A12	R403	K6	R510	B8	R629	A10																
R206	M2	R404	C5	R511	B8	R630	A10																
R207	F2	R405	K12	R512	B8	R631	B6																
R208	J11	R406	D12	R513	A8	R632	B6																
R209	B3	R407	K6	R514	B8	R633	B6																
R210	*L2	R408	C5	R515	B7	R634	B6																
R211	*L2	R409	K12	R516	B8	R635	B6																
R212	*F2	R410	K12	R517	A7	R636	B6																
R213	*E2	R411	D12	R518	A8	R637	B6																
R214	*H11	R412	D12	R519	A6	R638	B6																
R215	*H11	R413	K6	R520	A6	R639	B6																
R216	*B2	R414	K6	R521	A7	R640	B5																
R217	*B2	R415	C4	R522	A7	R641	B5																
R218	*L2	R416	C4	R523	B7	R642	B5																
R219	*L2	R417	K12	R524	B7	R643	B5																
R220	*F2	R418	D12	R525	B7	R644	B5																
R221	*E2	R419	K6	R526	B8	R645	B5																
R222	*H11	R420	C4	R527	B8	R646	B5																
R223	*H11	R421	K12	R528	B8	R647	C11																
R224	*B2	R422	E12	R529	B7	R648	C11																
R225	*B2	R423	K6	R530	A7	R649	C11																
R226	M2	R424	D4	R531	B8	R650	C11																
R227	F2	R425	M12	R532	A8	R651	C11																

R652	C11	R812	*B10	R1001	C12	R1341	*N10	R1500	P9	R1711	P7	R1922	P5	R2133	*P3	R2410	*G8	R2621	F7	R2832	G5	R3043	*G4	R3609	*G10	RB931	L10	RB2000	N6	RB2708	*H6
R653	C11	R813	B10	R1002	*C12	R1342	*G10	R1501	P9	R1712	P7	R1923	P5	R2200	L4	R2411	*G8	R2622	F7	R2833	G5	R3044	*G3	R3610	*G10	RB932	L10	RB2001	N6	RB2709	H6
R654	C11	R814	B10	R1003	*C12	R1343	*N10	R1502	P9	R1713	P7	R1924	P6	R2201	L3	R2412	G9	R2623	E7	R2834	G5	R3045	G3	R3611	*G10	RB933	E10	RB2002	M6	RB2710	H6
R655	J2	R815	B10	R1004	C12	R1344	*G10	R1503	*P9	R1714	*P7	R1925	P6	R2202	L3	R2413	G9	R2624	E7	R2835	G5	R3101	N10	R3612	*G10	RB934	E10	RB2003	M6	RB2711	H6
R656	J2	R816	*B10	R1005	C11	R1345	*N10	R1504	*N9	R1715	*P7	R1926	P6	R2203	L4	R2414	G9	R2625	G7	R2836	G5	R3102	N11	R3613	*G10	RB935	E10	RB2004	M6	RB2712	H6
R657	J2	R817	B10	R1006	C11	R1346	*G10	R1505	P9	R1716	*P8	R1927	P6	R2204	L3	R2415	G8	R2626	*G7	R2837	*G5	R3103	*N11	R3614	*G10	RB936	E10	RB2005	N6	RB2713	H5
R658	J2	R818	B10	R1007	C11	R1347	L7	R1506	P9	R1717	*P7	R1928	*P6	R2205	L3	R2416	G8	R2627	*G7	R2838	G6	R3104	N11	R3615	*G10	RB937	*E10	RB2006	N6	RB2714	*H6
R659	J2	R819	A10	R1008	C11	R1348	L7	R1507	P9	R1718	P7	R1929	*P6	R2206	M3	R2417	G10	R2628	G7	R2839	*G6	R3105	N12	R3616	*G10	RB938	*E10	RB2007	N6	RB2715	H6
R660	J2	R820	A10	R1009	C11	R1349	E7	R1508	P9	R1719	P7	R1930	*P5	R2207	*M4	R2418	G10	R2629	G6	R2840	*G6	R3106	*N11	R3617	*E11	RB939	*E10	RB2100	P3	RB2716	*H5
R661	J2	R821	B10	R1010	C11	R1350	E7	R1509	P9	R1720	*P8	R1931	*P5	R2208	*N3	R2419	G9	R2630	G6	R2841	*G6	R3107	N11	R3618	*E11	RB940	*E10	RB2101	P3	RB2800	G6
R662	J2	R822	B12	R1011	C11	R1351	L7	R1510	P9	R1721	*P8	R1932	*P5	R2209	M3	R2420	G10	R2631	*G7	R2842	G6	R3108	N11	R3619	*F11	RB941	E10	RB2102	P3	RB2801	G6
R663	B6	R823	B12	R1012	C11	R1352	L7	R1511	P9	R1722	P7	R1933	*P5	R2210	*N3	R2421	F8	R2632	G6	R2843	*G6	R3109	N11	R3620	*F10	RB942	E10	RB2103	P3	RB2802	G6
R664	B6	R824	B10	R1013	*C11	R1353	F7	R1512	P9	R1723	P7	R2000	L4	R2211	*N3	R2422	F8	R2633	G6	R2844	*G5	R3110	N11	R3621	*F11	RB943	E10	RB2104	*P4	RB2803	G6
R665	B6	R825	B10	R1014	*C11	R1354	F7	R1513	P9	R1724	P7	R2001	L4	R2212	M4	R2423	E8	R2634	G6	R2845	G5	R3201	K11	R3622	*F11	RB944	E10	RB2105	*P3	RB2804	G6
R666	B6	R826	B10	R1015	*C11	R1355	L7	R1514	*P9	R1725	P7	R2002	L4	R2213	M4	R2424	E8	R2635	G6	R2900	H3	R3202	K10	R3623	G10	RB1001	*C12	RB2106	*P3	RB2805	G6
R667	B6	R827	B10	R1016	*C11	R1356	L7	R1515	*P9	R1726	P7	R2003	L5	R2214	M4	R2425	*G8	R2636	G6	R2901	H4	R3203	*K10	R3624	G10	RB1002	*C12	RB2107	*P3	RB2806	G6
R668	B6	R828	B10	R1017	*C11	R1357	E7	R1516	*P9	R1727	P7	R2004	L4	R2215	M3	R2426	*G8	R2637	*G6	R2902	H4	R3204	K12	R3625	G10	RB1003	*C12	RB2108	*N4	RB2807	G6
R669	B6	R829	A10	R1018	*C11	R1358	E7	R1517	*P9	R1728	*P8	R2005	L4	R2216	M3	R2427	*G8	R2638	G8	R2903	*H3	R3205	K11	R3626	G10	RB1004	C12	RB2109	N4	RB2900	H3
R670	B6	R830	B10	R1019	*C11	R1359	*L8	R1518	P9	R1729	*P8	R2006	M5	R2217	N4	R2428	G8	R2639	*G8	R2904	*H4	R3206	*K11	R3627	E11	RB1301	K9	RB2110	N4	RB2901	H3
R671	B6	R831	A10	R1020	*C11	R1360	*F8	R1519	P9	R1730	*P7	R2007	M5	R2218	N4	R2429	G8	R2640	*G8	R2905	H4	R3207	K12	R3628	*F10	RB1302	K9	RB2111	P4	RB2902	H3
R672	B5	R832	B10	R1101	*M10	R1361	*L8	R1520	*P9	R1731	*P7	R2008	*N5	R2219	M4	R2430	G8	R2641	*G8	R2906	H4	R3208	K12	R3629	F11	RB1303	D9	RB2112	P4	RB2903	H3
R673	B5	R833	B10	R1102	*F10	R1362	*F8	R1521	*P9	R1732	*P7	R2009	M5	R2220	N4	R2431	*G8	R2642	G8	R2907	H4	R3209	K12	R3630	E11	RB1304	D9	RB2113	P3	RB2904	*H4
R674	B5	R834	*B10	R1103	*M10	R1363	*L8	R1522	P9	R1733	*P7	R2010	*N5	R2221	L4	R2432	G8	R2643	*G8	R2908	H4	R3210	K12	R3631	E11	RB1305	B5	RB2114	*P4	RB2905	*H3
R675	B5	R835	C1	R1104	*F10	R1364	*E8	R1523	P9	R1800	L8	R2011	*N5	R2222	L4	R2433	G8	R2644	*G6	R2909	H4	R3301	G10	R3632	E11	RB1306	B5	RB2115	P4	RB2906	*H3
R676	B5	R836	C1	R1105	*L8	R1365	L3	R1524	P9	R1801	L7	R2012	M5	R2223	L3	R2434	G8	R2645	G7	R2910	J4	R3302	G11	R3633	*F10	RB1500	P8	RB2116	*P3	RB2907	*H3
R677	B5	R837	C1	R1106	*L4	R1366	L3	R1525	P9	R1802	L7	R2013	M5	R2224	K3	R2435	G8	R2700	H5	R2911	J4	R3303	*G11	R3634	F11	RB1501	P9	RB2200	N4	RB2908	*H4
R678	B5	R838	B1	R1107	*E8	R1367	E3	R1526	P9	R1803	L7	R2014	M6	R2225	N3	R2436	G8	R2701	H5	R2912	H3	R3304	G11	R3635	E11	RB1502	P9	RB2201	N4	RB2909	H4
R701	K2	R839	B1	R1108	*E4	R1368	E3	R1527	P9	R1804	L7	R2015	M5	R2226	*N3	R2437	*G8	R2702	H5	R2913	H4	R3305	G12	R3636	E11	RB1503	P9	RB2202	M4	RB2910	H4
R702	K2	R840	B1	R1109	*M10	R1369	L3	R1528	*P9	R1805	L7	R2016	M5	R2227	*N3	R2438	G10	R2703	*H5	R2914	*J3	R3306	*G11	R3637	*G10	RB1504	*P9	RB2203	M4	RB2911	H4
R703	*M12	R841	B10	R1110	*F10	R1370	L3	R1529	*P9	R1806	M7	R2017	N6	R2228	M3	R2439	*G10	R2704	*H6	R2915	*J3	R3307	G11	R3638	*G10	RB1505	*P9	RB2204	M4	RB2912	H4
R704	*L11	R842	B10	R1201	K10	R1371	F3	R1530	*P9	R1807	*M7	R2018	N6	R2229	M3	R2440	*G10	R2705	H6	R2916	*H4	R3308	G11	R3639	G11	RB1506	*P9	RB2205	N4	RB2913	H3
R705	*M11	R843	B10	R1202	D10	R1372	F3	R1531	*P9	R1808	*N7	R2019	M6	R2230	N3	R2441	*G10	R2706	H5	R2917	*H3	R3309	G11	R3640	F11	RB1507	*P9	RB2206	N4	RB2914	*H4
R706	*L11	R844	*B10	R1203	*L7	R1373	L3	R1532	*P9	R1809	M7	R2020	N6	R2231	*N3	R2442	G10	R2707	H5	R2918	H3	R3310	G11	R3701	*L8	RB1508	*N9	RB2207	N4	RB2915	H4
R707	*F12	R845	B10	R1204	*K7	R1374	L3	R1533	*P9	R1810	*N6	R2021	L4	R2232	N3	R2443	*G10	R2708	H5	R2919	H3	R3401	D11	R3702	*L8	RB1509	N10	RB2300	H8	RB2916	*H3
R708	*E11	R846	B10	R1205	*L4	R1375	E3	R1600	L8	R1811	*N6	R2022	L5	R2233	N3	R2444	*G8	R2709	H6	R2920	*H4	R3402	D10	R3703	*L8	RB1510	N10	RB2301	H9	RB3000	G4
R709	*F11	R847	B10	R1206	*K4	R1376	E3	R1601	L8	R1812	M7	R2023	L5	R2234	N3	R2445	G8	R2710	J6	R2921	*H4	R3403	*D10	R3704	*L8	RB1511	P9	RB2302	H9	RB3001	G4
R710	*E11	R848	*B10	R1207	*E7	R1377	*L4	R1602	L8	R1813	M7	R2024	L5	R2235	N3	R2500	H7	R2711	J6	R2922	H3	R3404	D12	R3705	*K8	RB1512	P9	RB2303	H9	RB3002	G4
R711	K10	R849	C9	R1208	*E7	R1378	*F4	R1603	L8	R1814	M7	R2025	*N5	R2236	N3	R2501	H7	R2712	H5	R2923	H3	R3405	D11	R3706	*K8	RB1513	P9	RB2304	*H9	RB3003	G4
R712	D10	R850	C10	R1209	*E4	R1379	*L4	R1604	L8	R1815	M7	R2026	*N5	R2237	*N3	R2502	H7	R2713	H6	R2924	H4	R3406	*D11	R3707	*L8	RB1514	*P9	RB2305	*H9	RB3004	G4
R713	K2	R851	C12	R1210	*E4	R1380	*F4	R1605	L8	R1816	M7	R2027	*N5	R2238	N4	R2503	*H7	R2714	*J5	R2925	H4	R3407	D12	R3801	*L4	RB1515	P9	RB2306	*H9	RB3005	G4
R714	K2	R852	C12	R1211	*K8	R1381	*L4	R1606	M9	R1817	N8	R2028	M5	R2239	*N4	R2504	*H8	R2715	*J5	R2926	H4	R3408	D12	R3802	*L4	RB1516	*P9	RB2307	*H9	RB3006	G4
R715	K2	R853	C9	R1212	*K8	R1382	*E4	R1607	M9	R1818	N8	R2029	M5	R2240	*N4	R2505	H8	R2716	*H6	R2927	H4	R3409	D12	R3803	*L4	RB1600	N10	RB2308	*H9	RB3007	G4
R716	K2	R854	C9	R1213	*K4	R1383	K10	R1608	*N9	R1819	M7	R2030	N5	R2241	*N4	R2506	H7	R2717	*H5	R2928	*H4	R3410	D12	R3804	*L4	RB1601	N10	RB2309	H10		
R717	K2	R855	C12	R1214	*K4	R1384	K10	R1609	M9	R1820	N8	R2031	*N5	R2242	N4	R2507	H7	R2718	H5	R2929	*H4	R3501	*N10	R3805	*K4	RB1602	M10	RB2310	H10	S601	K1
R718	K2	R856	C12	R1215	*E8	R1385	D10	R1610	*N8	R1821	L7	R2032	N5	R2243	*N4	R2508	H7	R2719	H5	R2930	*H3	R3502	*N10	R3806	*K4	RB1603	M9	RB2311	H9		
R719	K2	R857	C9	R1216	*E8	R1386	D10	R1611	*N8	R1822	L7	R2033	N5	R2244	*N3	R2509	H7	R2720	*H6	R2931	*H3	R3503	*N10	R3807	*L5	RB1604	M9	RB2312	H9	SORI01	P6
R720	K2	R858	C9	R1217	*E4	R1387	*L8	R1612	M9	R1823	L7	R2034	N5	R2245	N3	R2510	J7	R2721	*H6	R2932	*H3	R3504	*N10	R3901	*E8	RB1605	N10	RB2313	H9	SORI02	A6
R721	*K7	R859	C12	R1219	D4	R1388	*L8	R1613	M9	R1824	K7	R2035	N5	R2300	H9	R2511	J7	R2722	H5	R2933	*H3	R3505	*M10	R3902	*E8	RB1606	N10	RB2314	*H9		
R722	*K8	R860	C12	R1220	*E4	R1389	*E8	R1614	M9	R1825	N7	R2036	N5	R2301	H9	R2512	H7	R2723	H5	R3000	F4	R3506	*M10	R3903	*E8	RB1607	N10	RB2315	H9	TP201	A12
R723	*K8	R861	C9	R1221	*M10	R1390	*E8	R1615	M8	R1826	*N7	R2037	*N5	R2302	H9	R2513	H7	R2724	H6	R3001	E3	R3507	*N10	R3904	*E8	RB1700	P7	RB2316	*H9	TP202	M2
R724	*K8	R862	*B11	R1222	*M10	R1391	*L4	R1616	M8	R1827	*N7	R2038	N6	R2303	*H9	R2514	*J7	R2725	H6	R3002	E3	R3508	*N10	R3905	*E8	RB1701	P7	RB2400	G10	TP203	G2
R725	*E7	R863	*B11	R1301	C9	R1392	*L4	R1617	N10	R1828	M7	R2039	*N6	R2304	*H9	R2515	*J7	R2726	H6	R3003	F4	R3509	*M10	R3906	*E8	RB1702	P7	RB2401	G10	TP204	J10
R726	*E8	R864	*B11	R1302	C9	R1393	*E4	R1618	N10	R1829	M6	R2040	*N6	R2305	H9	R2516	*H8	R2727	H6	R3004	E3	R3510	*M10	R3907	*E8	RB1703	P7	RB2402	G10	TP205	C2
R727	*D8	R865	*B11	R1303	C9	R1394	*E4	R1619	M9	R1830	N6	R2041	*N6	R2306	H9	R2517	*H7	R2728	*H6	R3005	E3	R3511	*N10	R4001	*E4	RB1704	*P7	RB2403	G9	TP206	P2
R728	*E8	R866	*B11	R1304	C9	R1395	*F1	R1620	N10	R1831	*N7	R2042	N6	R2307	H9	R2518	H7	R2729	*H6	R3006	G3	R3512	*N10	R4002	*E4	RB1705	*P7	RB2404	G9	TP207	J2
R729	*K7	R867	*B11	R1305	C9	R1396	*F1	R1621	L8	R1832	N6	R2043	*N6	R2308	H9	R2519	H7	R2730	*H5	R3007	*G4	R3513	*M10	R4003	*E4	RB1706	*P7	RB2405	G10	TP208	C3
R730	*E7	R868	*B11	R1306	C9	R1397	*E1	R1622	L8	R1833	N6	R2044	*N5	R2309	H9	R2520	*H8	R2731	*H5	R3008	*G3	R3514	*M10	R4004	*E4	RB1707	*P7	RB2406	G10	TP401	L12
R731	*L7	R869	*B11	R1307	C9	R1398	*E1	R1623	L8	R1834	N6	R2045	N5	R2310	J9	R2521	*H8	R2732	*H5	R3009	G3	R3515	*N10	R4005	*E4	RB1708	*N8	RB2407	G10	TP402	E12
R732	*E7	R870	*B10	R1308	C9	R1399	*E1	R1624	L8	R1835	N6	R2100	P3	R2311	J9	R2522	H7	R2733	*H5	R3010	*G3	R3516	*N10	R4006	*E4	RB1709	N8	RB2500	H7	TP403	K6
R733	*K3	R871	*B10	R1309	F1	R1400	*E1	R1625	*N8	R1836	N6	R2101	P4	R2312	H9	R2523	H7	R2800	F4	R3011	*H3	R3517	*L11	R4007	*E5	RB1710	N8	RB2501	H7	TP404	C4
R734	*K5	R872	*B10	R1310	C9	R1401	G1	R1626	*N8	R1837	*N6	R2102	P4	R2313	H9	R2524	H7	R2801	F4	R3012	G4	R3518	*L11			RB1711	P8	RB2502	H7	TP405	M12
R735	*K4	R873	*B10	R1311	C9	R1402	G1	R1627	*N8	R1838	N8	R2103	*P3	R2314	*J9	R2525	H7	R2802	F4	R3013	G4	R3519	*L11	RB901	*B12	RB1712	P7	RB2503	H7	TP406	F12
R736	*K5	R874	*B10	R1312	F1	R1403	G1	R1628	M8	R1839	*N8	R2104	*N4	R2315	*J9	R2526	H7	R2803	F5	R3014	G4	R3520	*M10	RB902	*C12	RB1713	P7	RB2504	*H7	TP407	J5
R737	*E3	R875	*B10	R1313	C9	R1404	G1	R1629	M8	R1840	*N8	R2105	P4	R2316	*H9	R2527	H7	R2804	F4	R3015	G3	R3521	*L11	RB903	*B12	RB1714	*P8	RB2505	*H7	TP408	C3
R738	*E5	R876	*B10	R1314	C9	R1405	G1	R1630	N8	R1841	*N8	R2106	P4	R2317	*H9	R2528	*H8	R2805	F4	R3016	G3	R3522	*L11	RB904	*C12	RB1715	P7	RB2506	*H7	TP409	N12
R739	*D4	R877	*B10	R1315	E1	R1406	F1	R1631	*N8	R1842	N8	R2107	P4	R2318	H9	R2529	*H8	R2806	G5	R3017	G4	R3523	N10	RB905	*B12	RB1716	*P7	RB2507	*H7	TP410	G12
R740	*E5	R878	B9	R1316	B10	R1407	F1	R1632	N8	R1843	*N8	R2108	P4	R2319	H9	R2530	*H7	R2807	G5	R3018	G4	R3524	N10	RB906	*C12	RB1800	N8	RB2508	*H8	TP411	K5
R741	*K4	R879	A9	R1317	B10	R1408	F1	R1633	N8	R1844	*N6	R2109	P4	R2320	*H9	R2531	*H7	R2808	*G5	R3019	G4	R3525	N10	RB907	*B12	RB1801	N8	RB2509	H8	TP412	E5
R742	*E4	R880	A9	R1318	E1	R1409	F1	R1634	N8	R1845	N7	R2110	P4	R2321	*H9	R2532	*H7	R2809	G5	R3020	G4	R3526	N10	RB908	*C12	RB1802	M8	RB2510	H8	TP601	J1
R743	*L4	R881	A9	R1319	B10	R1410	F1	R1635	N8	R1900	P5	R2111	P4	R2322	H9	R2533	*H7	R2810	*G5	R3021	F4	R3527	L11	RB909	*C12	RB1803	M8	RB2511	H8	TP602	B5
R744	*E4	R882	A9	R1320	B10	R1411	F1	R1636	N8	R1901	P5	R2112	P3	R2323	H9	R2600	F8	R2811	*G5	R3022	F4	R3528	*M10	RB910	B12	RB1804	M8	RB2512	H7	TP603	J2
R745	*L10	R883	B9	R1321	E1	R1412	F1	R1637	*N8	R1902	P5	R2113	P4	R2324	H9	R2601	E7	R2812	G5	R3023	E3	R3529	M11	RB911	B12	RB1805	N8	RB2513	H7	TP604	B11
R746	K2	R884	B9	R1322	E1	R1413	F1	R1638	N10	R1903	*P5	R2114	*P3	R2325	H9	R2602	E7	R2813	G5	R3024	E3	R3530	L11	RB912	B12	RB1806	N8	RB2514	*H8	TP605	B11
R747	K2	R885	B9	R1323	B9	R1414	F1	R1639	*N10	R1904	*N6	R2115	*P3	R2326	H9	R2603	F7	R2814	G6	R3025	G3	R3531	L11	RB913	B12	RB1807	N8	RB2515	H7	TP606	B11
R748	K2	R886	B9	R1324	B9	R1415	F1	R1640	*N10	R1905	P6	R2116	*P4	R2327	H9	R2604	E7	R2815	G5	R3026	*G3	R3532	L11	RB914	*C12	RB1900	P5	RB2516	*H7	TP607	B11
R749	K2	R887	B10	R1325	B10	R1416	F1	R1641	*N10	R1906	P5	R2117	*P3	R2328	*H9	R2605	E7	R2816	G5	R3027	*G3	R3533	*M10	RB915	*C12	RB1901	P5	RB2600	G8	TP608	B5
R750	K2	R888	B10	R1326	B10	R1417	F1	R1642	N10	R1907	P5	R2118	P3	R2329	*H9	R2606	G7	R2817	G6	R3028	G3	R3534	M11	RB916	*C12	RB1902	P5	RB2601	G8	TP609	B5
R751	K2	R889	B9	R1327	*C10	R1418	F1	R1643	*N10	R1908	P5	R2119	P3	R2330	*H9	R2607	*G7	R2818	G6	R3029	G3	R3535	L11	RB917	C12	RB1903	P5	RB2602	G8	TP610	B11
R752	K2	R890	A9	R1328	B10	R1419	F1	R1644	*N8	R1909	P6	R2120	*P4	R2331	*H9	R2608	*G7	R2819	G6	R3030	G3	R3536	L11	RB918	C12	RB1904	*P5	RB2603	G8	TP611	B11
R753	K2	R891	B9	R1329	*M10	R1420	F1	R1645	N8	R1910	P6	R2121	*P4	R2332	*H9	R2609	G7	R2820	G6	R3031	*G3	R3537	*M10	RB919	C12	RB1905	*P5	RB2604	G8	TP612	A5
R754	K2	R892	B9	R1330	*M10	R1421	F1	R1700	P7	R1911	P6	R2122	P3	R2333	*H9	R2610	*G6	R2821	F4	R3032	G3	R3538	*M10	RB920	C12	RB1906	*P5	RB2605	G8	TP613	A5
R801	*B10	R893	C12	R1331	*F10	R1422	B10	R1701	P7	R1912	P5	R2123	P3	R2400	F8	R2611	*H6	R2822	F5	R3033	G3	R3539	M11	RB921	L10	RB1907	*P5	RB2606	G8	TP701	K2
R803	B10	R894	*B9	R1332	*F10	R1423	B10	R1702	P7	R1913	P6	R2124	P4	R2401	F8	R2612	G7	R2823	E5	R3034	G3	R3540	M11	RB922	L10	RB1908	*N6	RB2607	G8	TP1001	C11
R804	B10	R895	*B9	R1333	*L10	R1424	*M8	R1703	*P7	R1914	*P5	R2125	P4	R2402	F8	R2613	G7	R2824	E5	R3035	G3	R3601	*G10	RB923	K10	RB1909	N6	RB2700	H5	TP1002	C11
R805	B10	R896	*B9	R1334	*L10	R1425	*G12	R1704	*N8	R1915	*P5	R2126	P4	R2403	F8	R2614	G7	R2825	*G5	R3036	G3	R3602	*G10	RB924	K10	RB1910	N6	RB2701	H5		
R806	B10	R897	*B9	R1335	*E10	R1426	*L4	R1705	P8	R1916	*P6	R2127	P4	R2404	F8	R2615	G7	R2826	*G5	R3037	*G3	R3603	*G10	RB925	*L10	RB1911	P6	RB2702	H5	X601	J2
R807	B10	R898	C9	R1336	*E10	R1427	*M10	R1706	P7	R1917	*P5	R2128	*P4	R2405	F8	R2616	G7	R2827	*G5	R3038	G4	R3604	*G10	RB926	*L10	RB1912	P6	RB2703	H5	X602	A10
R808	*B10	R899	C9	R1337	*L10	R1428	*F4	R1707	P7	R1918	P5	R2129	*P4	R2406	G9	R2617	G8	R2828	G5	R3039	*G4	R3605	*G10	RB927	*L10	RB1913	P5	RB2704	*H5	X701	K2
R809	B10	R900	A9	R1338	*L10	R1429	F8	R1708	P7	R1919	P5	R2130	*P3	R2407	G9	R2618	G8	R2829	G5	R3040	*G4	R3606	*G10	RB928	*L10	RB1914	*P6	RB2705	*H5		
R810	B10	R901	C12	R1339	*E10	R1451	*C10	R1709	P7	R1920	*P6	R2131	*P3	R2408	*G9	R2619	G7	R2830	G5	R3041	*G4	R3607	*G10	RB929	L10	RB1915	P6	RB2706	*H5		
R811	B10	R902	C12	R1340	*E10	R1452	*C10	R1710	P7	R1921	*P6	R2132	*P3	R2409	G9	R2620	G8	R2831	*G5	R3042	G4	R3608	*G10	RB930	L10	RB1916	*P5	RB2707	*H5		

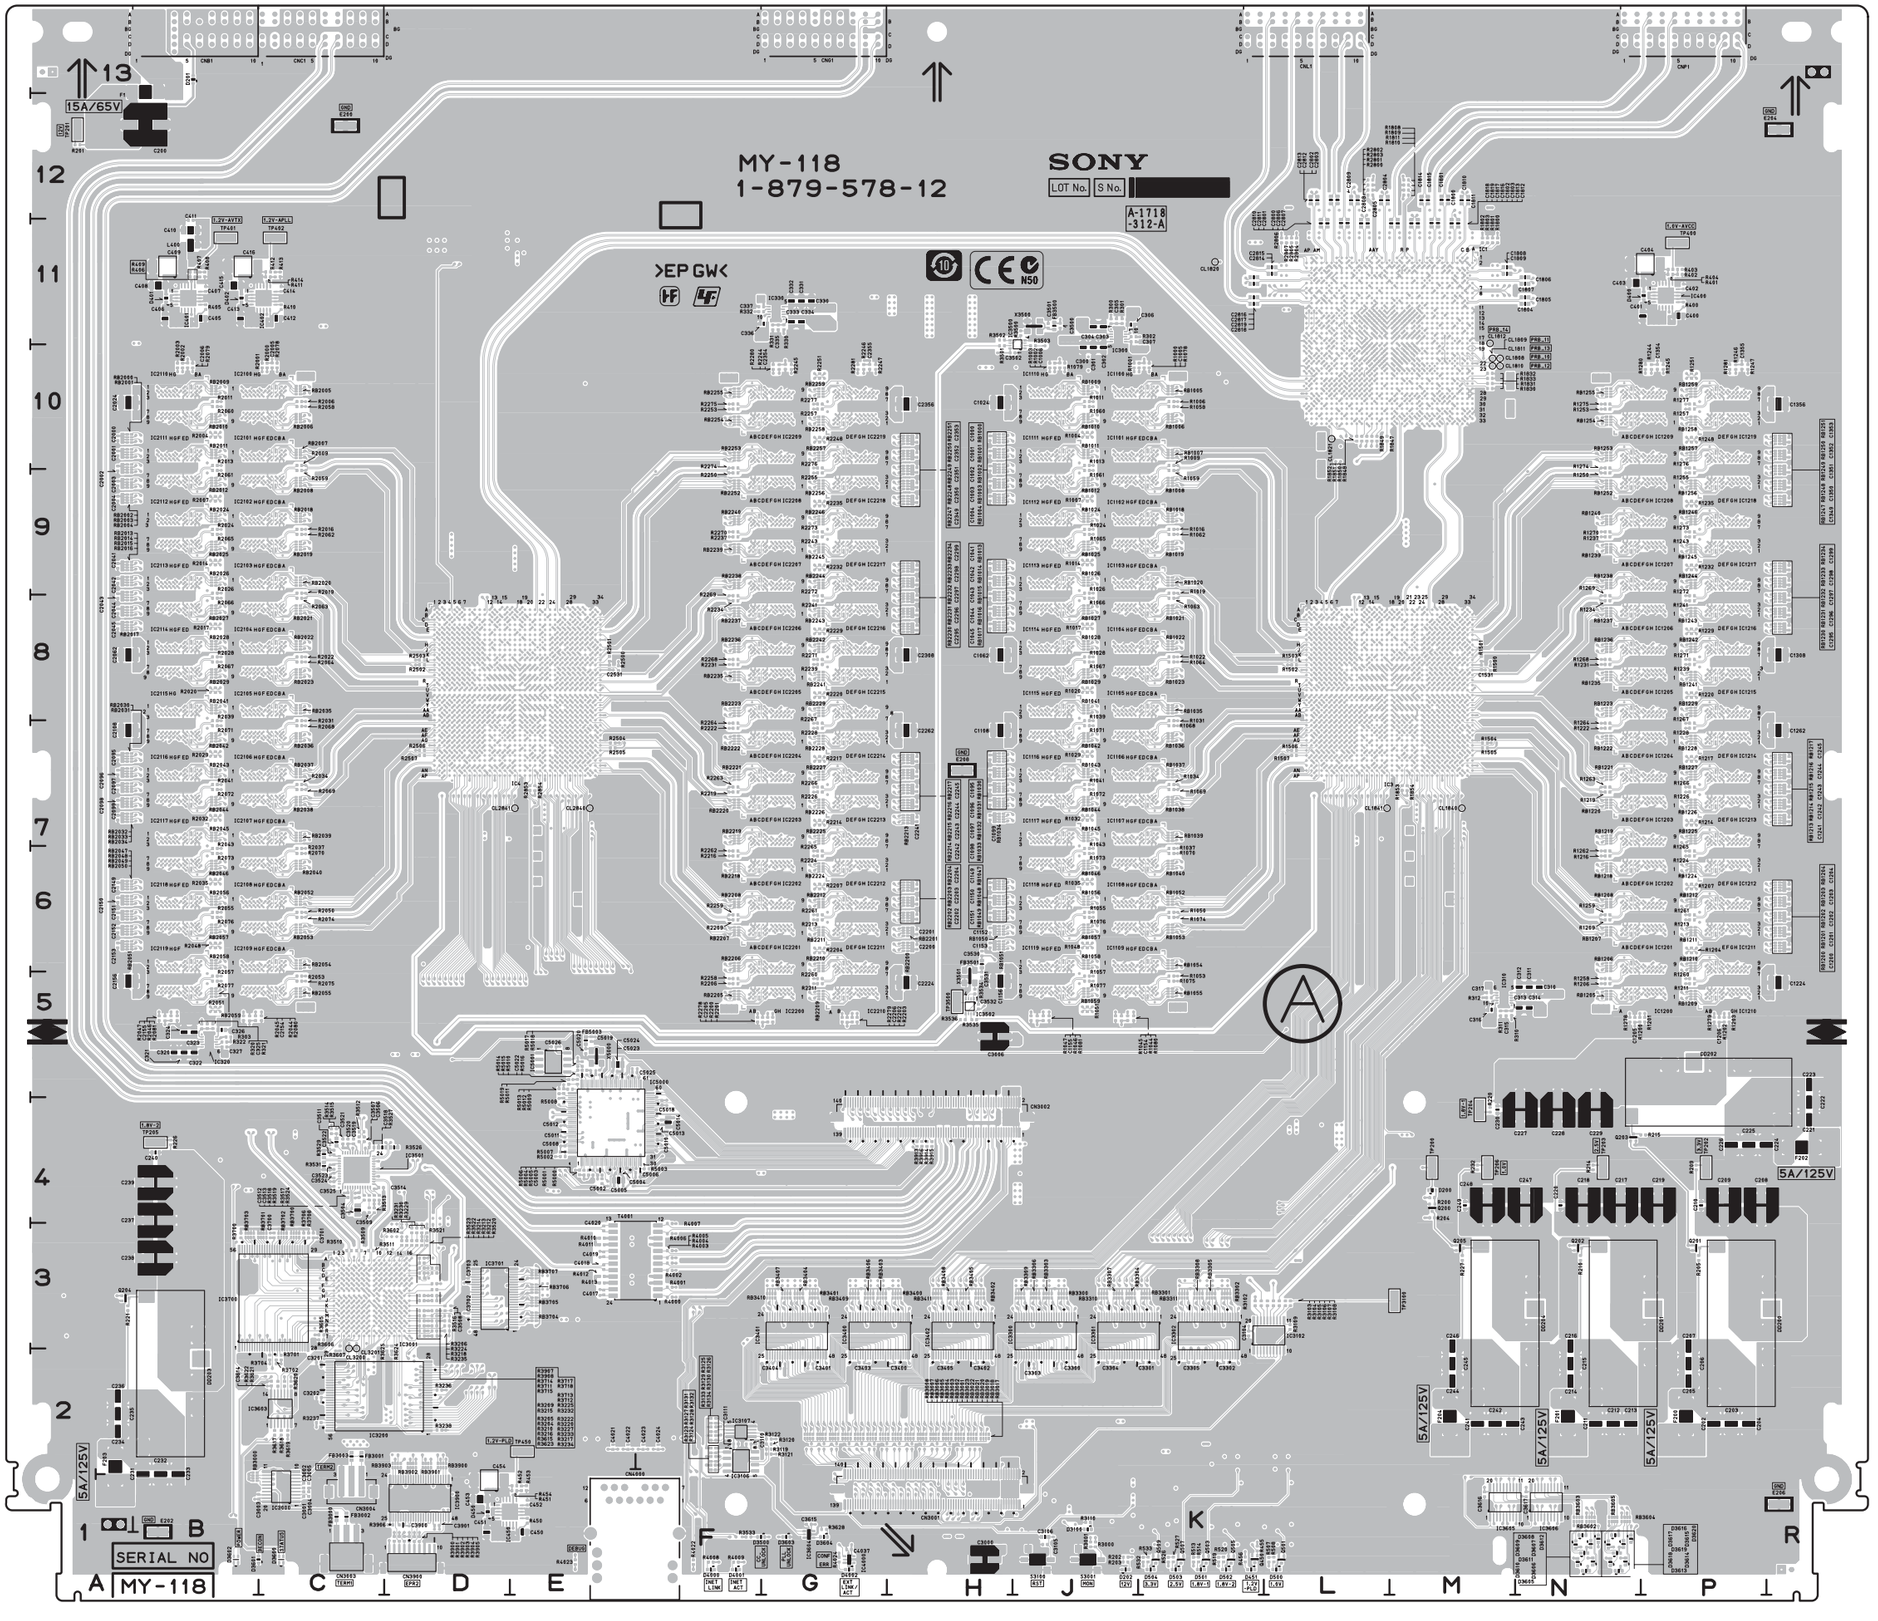

MY-118 -A SIDE-
SUFFIX: -12

MVS-8000X/7000X

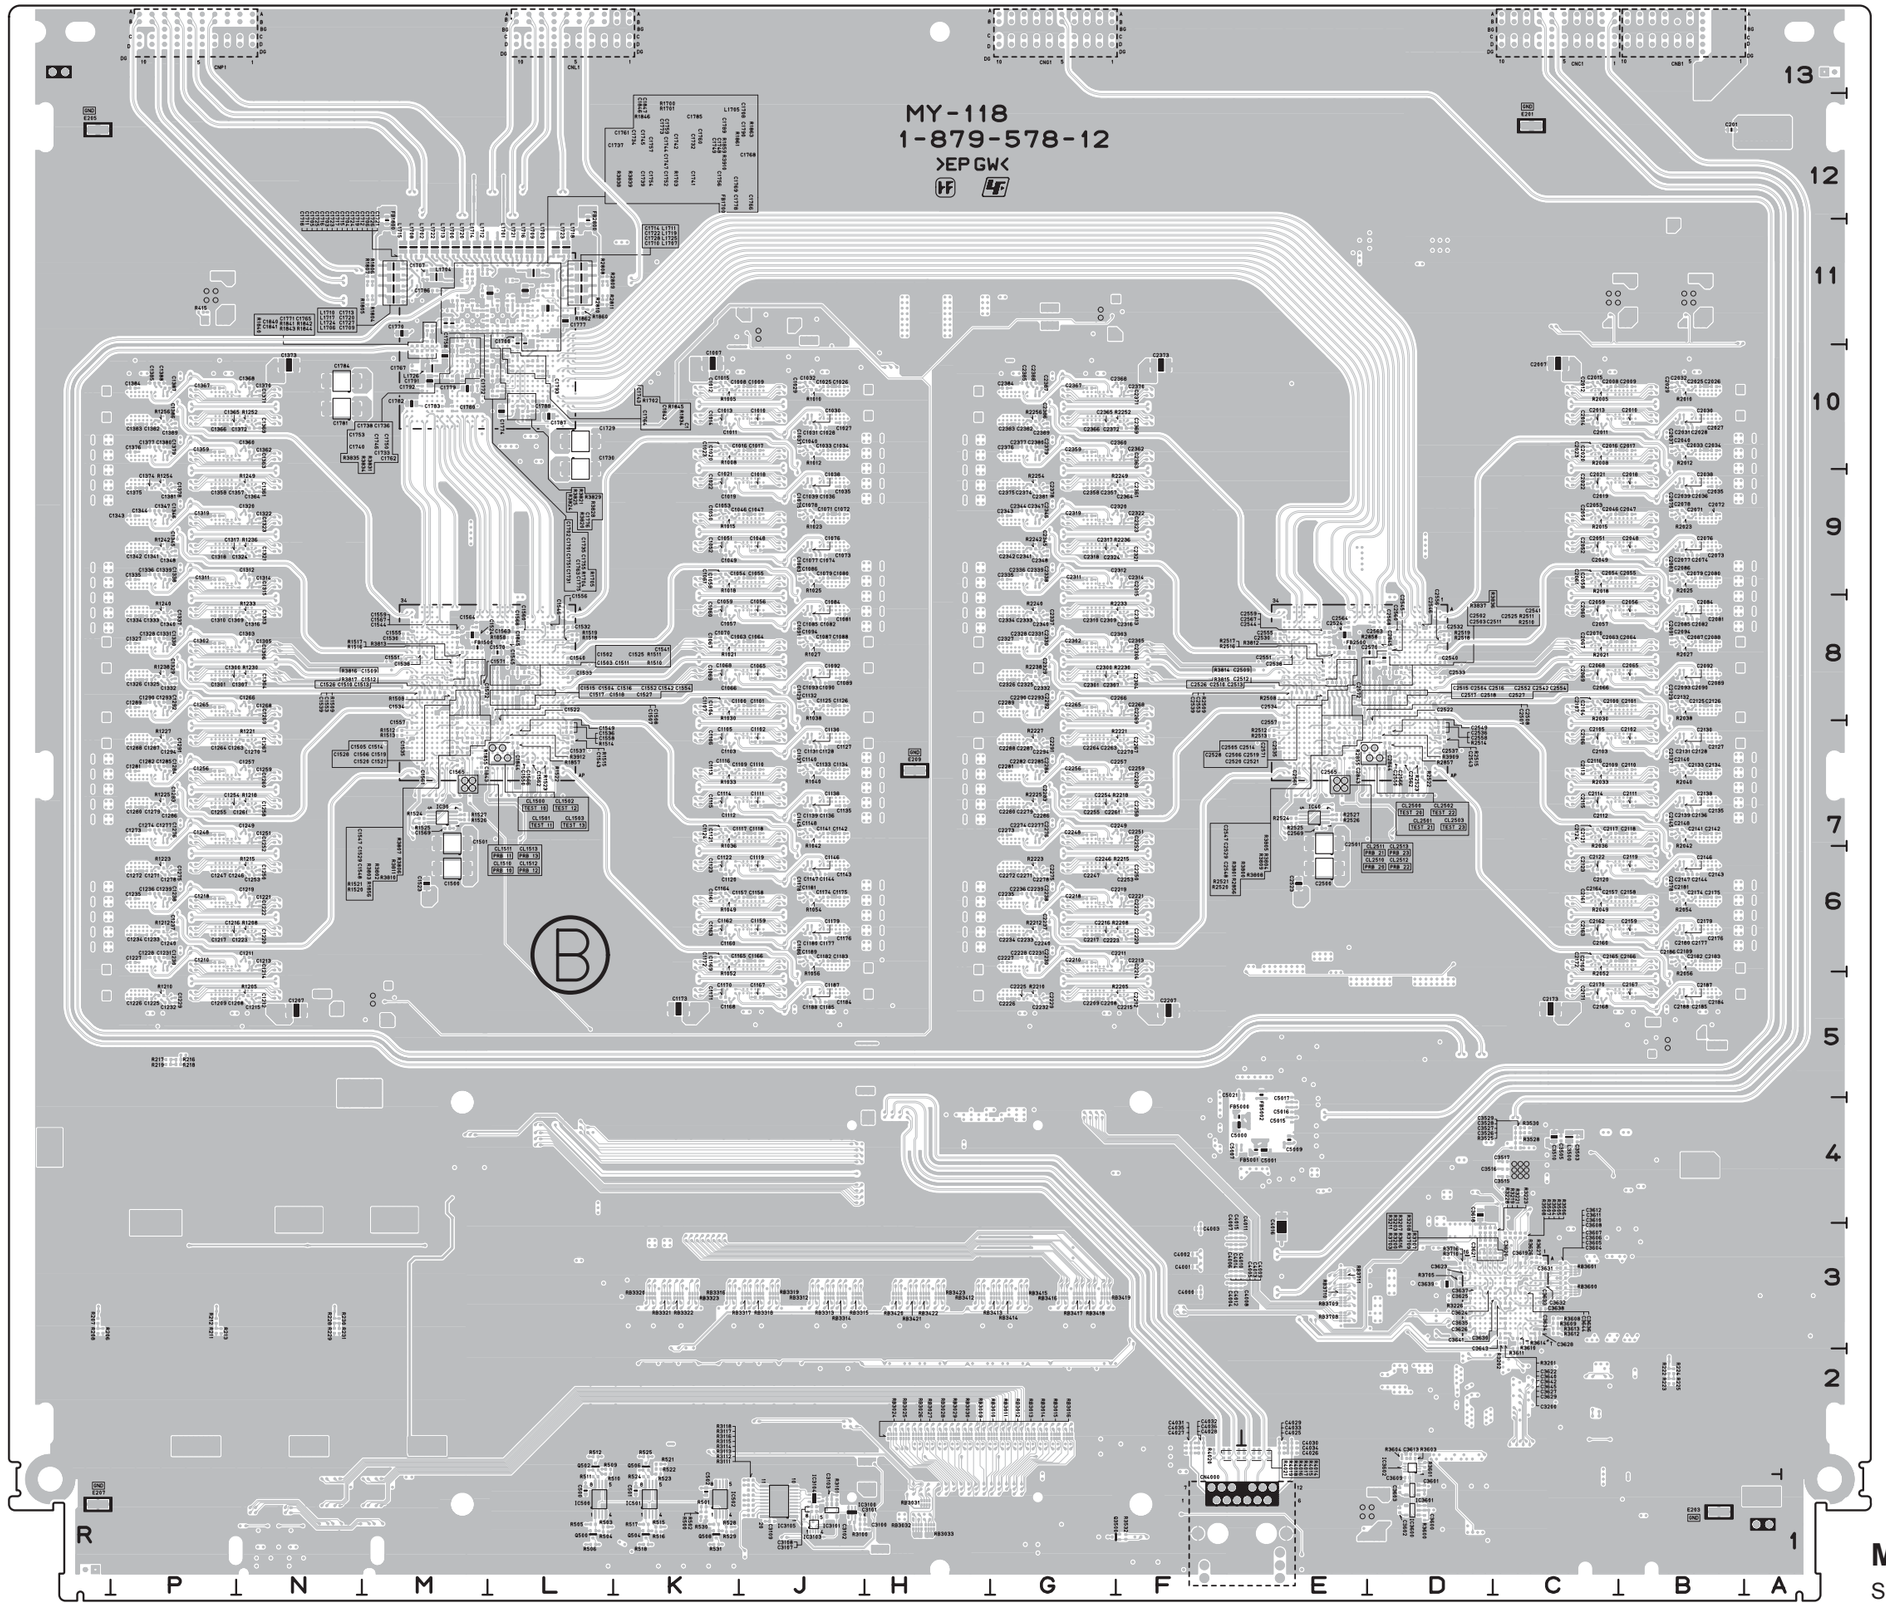

MY-118 -B SIDE-
SUFFIX: -12

MY-118 (1-879-578-12)
---
*:B SIDE

C1	*L10	C408	B11	C1074	*J9	C1165	*J6	C1266	*N8	C1357	*P9	C1558	*L7	C1776	*L10	C2045	A8	C2136	*B7	C2237	*G6	C2328	*G8	C2529	*E7	C3302	K2	C3702	D3	CL2510	*E7
C200	B12	C409	B11	C1075	*J9	C1166	*J6	C1267	*N7	C1358	*P9	C1559	*M8	C1777	*L11	C2046	*C9	C2137	*B7	C2238	*G6	C2329	*G8	C2530	*E8	C3303	J2	C3703	D3	CL2511	*E7
C201	*B12	C410	B11	C1076	*J9	C1167	*J5	C1268	*N8	C1359	*P10	C1560	*L8	C1778	*L11	C2047	*B9	C2138	*B7	C2239	*G6	C2330	*G8	C2531	E8	C3304	J2	C3900	D1	CL2512	*E7
C202	P2	C411	B11	C1077	*J9	C1168	*K5	C1269	*N8	C1360	*N10	C1561	*M7	C1779	*M10	C2048	*B9	C2139	*B7	C2240	*G6	C2331	*G8	C2532	*D8	C3305	K2	C3901	D1	CL2513	*E7
C203	P2	C412	C11	C1078	*J9	C1169	*K6	C1270	*N7	C1361	*N9	C1562	*L7	C1780	*M10	C2049	*C9	C2140	*B7	C2241	H7	C2332	*G8	C2533	*D8	C3400	H2	C4000	*F3	CL2840	E7
C204	P2	C413	B11	C1079	*J9	C1170	*K5	C1271	*P6	C1362	*N10	C1563	*L8	C1781	*N10	C2050	*C9	C2141	*B7	C2242	H7	C2333	*G8	C2534	*E8	C3401	G2	C4001	*F3	CL2841	E7
C205	P2	C414	C11	C1080	*J9	C1171	*K5	C1272	*P6	C1363	*N10	C1564	*M8	C1782	*M10	C2051	*C9	C2142	*B7	C2243	H7	C2334	*G8	C2535	*E7	C3402	H2	C4002	*F3	CL3200	C2
C206	P2	C415	B11	C1081	*J8	C1172	*K6	C1273	*P7	C1364	*N9	C1565	*M7	C1783	*M10	C2052	*C9	C2143	*B6	C2244	H7	C2335	*G9	C2536	*D7	C3403	G2	C4003	*F3	CL3201	C2
C207	P3	C416	B11	C1082	*J8	C1173	*K5	C1274	*P7	C1365	*P10	C1566	*L7	C1784	*N10	C2053	*C9	C2144	*B6	C2245	H7	C2336	*G9	C2537	*D7	C3404	G2	C4004	*F3		
C208	P4	C450	E1	C1083	*J9	C1174	*J6	C1275	*P6	C1366	*P10	C1567	*M8	C1785	*L11	C2054	*C9	C2145	*B7	C2246	*G6	C2337	*G8	C2538	*E8	C3405	H2	C4005	*F3	CN3001	H1
C209	P4	C451	D1	C1084	*J8	C1175	*J6	C1276	*P7	C1367	*P10	C1568	*L8	C1786	*M11	C2055	*B9	C2146	*B6	C2247	*G6	C2338	*G9	C2539	*E8	C3500	J11	C4006	*F3	CN3002	H4
C210	P4	C452	E1	C1085	*J8	C1176	*J6	C1277	*P7	C1368	*N10	C1569	*M7	C1787	*L10	C2056	*B8	C2147	*B6	C2248	*G7	C2339	*G9	C2540	*D8	C3501	J11	C4007	*F3	CN3003	C1
C211	N2	C453	D1	C1086	*J9	C1177	*J6	C1278	*P6	C1369	*N10	C1570	*L8	C1788	*L10	C2057	*C8	C2148	*B7	C2249	*F7	C2340	*G8	C2541	*D8	C3502	H10	C4008	*F3	CN3004	C1
C212	N2	C454	D1	C1087	*J8	C1178	*J6	C1279	*P7	C1370	*N10	C1571	*M8	C1789	*L11	C2058	*C9	C2149	A6	C2250	*F6	C2341	*G9	C2542	*D8	C3503	*C4	C4009	*F3	CN3900	D1
C213	N2	C500	*L1	C1088	*J8	C1179	*J6	C1280	*P7	C1371	*N10	C1572	*L8	C1790	*L11	C2059	*C8	C2150	A6	C2251	*F7	C2342	*G9	C2543	*D7	C3504	C4	C4010	*F3	CN4000	E1
C214	N2	C501	*K1	C1089	*J8	C1180	*J6	C1281	*P7	C1372	*N10	C1700	*L11	C1791	*M10	C2060	*C8	C2151	A6	C2252	*F7	C2343	*G9	C2544	*E8	C3505	*C4	C4011	*F3	CNB1	B13
C215	N2	C502	*K1	C1090	*J8	C1181	*J6	C1282	*P7	C1373	*N10	C1701	*L10	C1792	*M10	C2061	*C9	C2152	A6	C2253	*F6	C2344	*G9	C2545	*D8	C3506	C4	C4012	*F3	CNC1	C13
C216	N3	C1000	H10	C1091	*J8	C1182	*J6	C1283	*P7	C1374	*P9	C1702	*L11	C1793	*L10	C2062	A8	C2153	A6	C2254	*G7	C2345	*G9	C2546	*D8	C3507	C4	C4013	*F3	CNG1	G13
C217	N4	C1001	H10	C1092	*J8	C1183	*J6	C1284	*P7	C1375	*P9	C1703	*M11	C1800	M12	C2063	*C8	C2154	B5	C2255	*G7	C2346	*G9	C2547	*E7	C3508	D3	C4014	*F3	CNL1	L13
C218	N4	C1002	H10	C1093	*J8	C1184	*J5	C1285	*P7	C1376	*P10	C1704	*L11	C1801	M12	C2064	*B8	C2155	B5	C2256	*G7	C2347	*G9	C2548	*E7	C3509	C4	C4015	*F3	CNP1	P13
C219	P4	C1003	H9	C1094	*J8	C1185	*J5	C1286	*P7	C1377	*P10	C1705	*M11	C1802	M11	C2065	*B8	C2156	A5	C2257	*F7	C2348	*G9	C2549	*D7	C3510	*C4	C4016	*E3		
C220	N4	C1004	H9	C1095	H7	C1186	*J6	C1287	*P7	C1378	*P9	C1706	*L11	C1803	M11	C2066	*C8	C2157	*C6	C2258	*F7	C2349	H9	C2550	*D7	C3511	C4	C4017	E3	D200	M4
C221	R4	C1005	K10	C1096	H7	C1187	*J5	C1288	*P7	C1379	*P10	C1707	*M11	C1804	N11	C2067	*C8	C2158	*B6	C2259	*F7	C2350	H9	C2551	*E8	C3512	C4	C4018	E3	D201	B13
C222	R4	C1006	J10	C1097	H7	C1188	*J5	C1289	*P8	C1380	*P10	C1708	*L11	C1805	N11	C2068	*C8	C2159	*B6	C2260	*F7	C2351	H9	C2552	*D8	C3513	C4	C4019	E3	D202	J1
C223	R5	C1007	*K10	C1098	H7	C1189	*J6	C1290	*P8	C1381	*P9	C1709	*M11	C1806	N11	C2069	*C8	C2160	*C6	C2261	*F7	C2352	H10	C2553	*E8	C3514	C4	C4020	E3	D400	P11
C224	P4	C1008	*J10	C1099	H7	C1200	R6	C1291	*P7	C1382	*P10	C1710	*L11	C1807	N11	C2070	*C8	C2161	*C6	C2262	H7	C2353	H10	C2554	*D8	C3515	*C4	C4021	E2	D401	B11
C225	P4	C1009	*J10	C1100	*J8	C1201	R6	C1292	*P8	C1383	*P10	C1711	*M11	C1808	M11	C2071	*B9	C2162	*C6	C2263	*G7	C2354	G10	C2555	*E8	C3516	*C4	C4022	E2	D402	B11
C226	P4	C1010	*J10	C1101	*J8	C1202	R6	C1293	*P8	C1384	*P10	C1712	*L11	C1809	M11	C2072	*B9	C2163	*C6	C2264	*G7	C2355	G10	C2556	*D8	C3517	*C4	C4023	F2	D450	D1
C227	N4	C1011	*K10	C1102	*J7	C1203	R6	C1294	*P7	C1385	*P10	C1713	*M11	C1810	M12	C2073	*B9	C2164	*C6	C2265	*G8	C2356	H10	C2557	*E7	C3518	C4	C4024	F2	D451	K1
C228	N4	C1012	*K10	C1103	*K7	C1204	R6	C1295	R8	C1386	*P10	C1714	*L11	C1811	M12	C2074	*B9	C2165	*C6	C2266	*F8	C2357	*G9	C2558	*D7	C3519	C4	C4025	*E2	D500	L1
C229	N4	C1013	*K10	C1104	*K8	C1205	N5	C1296	R8	C1387	*P10	C1715	*L11	C1812	M11	C2075	*B9	C2166	*B6	C2267	*F7	C2358	*G9	C2559	*E8	C3520	C4	C4026	*E2	D501	K1
C230	M4	C1014	*K10	C1105	*K7	C1206	P5	C1297	R8	C1388	*P10	C1716	*M11	C1813	M11	C2076	*B9	C2167	*B5	C2268	*F8	C2359	*G10	C2560	*D8	C3521	C4	C4027	*F2	D502	K1
C231	B1	C1015	*K10	C1106	*K7	C1207	*N5	C1298	R9	C1389	*P10	C1717	*M11	C1814	M12	C2077	*B9	C2168	*C5	C2269	*F8	C2360	*F10	C2561	*E7	C3522	C4	C4028	*F2	D503	K1
C232	B1	C1016	*J10	C1107	*K8	C1208	*P5	C1299	R9	C1500	*M6	C1718	*M11	C1815	M12	C2078	*B9	C2169	*C6	C2270	*F7	C2361	*F9	C2562	*D7	C3523	C4	C4029	*E2	D504	K1
C233	B1	C1017	*J10	C1108	H7	C1209	*P5	C1300	*P8	C1501	*M7	C1719	*L11	C1816	M11	C2079	*B9	C2170	*C5	C2271	*G6	C2362	*F10	C2563	*D8	C3524	C4	C4030	*E2	D3100	J1
C234	A2	C1018	*J9	C1109	*J7	C1210	*P6	C1301	*P8	C1502	*L8	C1720	*M11	C1817	M11	C2080	*B9	C2171	*C5	C2272	*G6	C2363	*F10	C2564	*E8	C3525	C4	C4031	*F2	D3500	F1
C235	A2	C1019	*K9	C1110	*J7	C1211	*N6	C1302	*P8	C1503	*L8	C1721	*L11	C1818	M11	C2081	*B8	C2172	*C6	C2273	*G7	C2364	*F9	C2565	*E7	C3526	*C4	C4032	*F2	D3600	C1
C236	A2	C1020	*K10	C1111	*J7	C1212	*N5	C1303	*N8	C1504	*L8	C1722	*L11	C1819	M11	C2082	*B8	C2173	*C5	C2274	*G7	C2365	*G10	C2566	*D7	C3527	*C4	C4033	*E2	D3601	B1
C237	B4	C1021	*K9	C1112	*K7	C1213	*N6	C1304	*N8	C1505	*M8	C1723	*M11	C1840	*M10	C2083	*B9	C2174	*B6	C2275	*G6	C2366	*G10	C2567	*E8	C3528	*C4	C4034	*E2	D3602	B1
C238	B3	C1022	*K9	C1113	*K7	C1214	*N6	C1305	*N8	C1506	*M8	C1724	*L11	C1841	*M10	C2084	*B8	C2175	*B6	C2276	*G7	C2367	*G10	C2568	*D8	C3529	*C4	C4035	*F2	D3603	G1
C239	B4	C1023	*K10	C1114	*K7	C1215	*N5	C1306	*N8	C1507	*L8	C1725	*M11	C1842	*L10	C2085	*B8	C2176	*B6	C2277	*G7	C2368	*F10	C2569	*E7	C3530	H6	C4036	*F2	D3604	G1
C240	B4	C1024	H10	C1115	*K7	C1216	*P6	C1307	*N8	C1508	*L8	C1726	*L11	C1843	*M7	C2086	*B9	C2177	*B6	C2278	*G6	C2369	*F10	C2570	*D8	C3531	H5	C4037	G1	D3605	N1
C241	M2	C1025	*J10	C1116	*K7	C1217	*P6	C1308	R8	C1509	*M8	C1727	*M11	C1844	*L7	C2087	*B8	C2178	*B6	C2279	*G7	C2370	*F10	C2571	*E8	C3532	H5	C5000	*F4	D3606	N1
C242	M2	C1026	*J10	C1117	*J7	C1218	*P6	C1309	*P8	C1510	*M8	C1728	*L11	C1845	*L8	C2088	*B8	C2179	*B6	C2280	*G7	C2371	*F10	C2572	*E8	C3600	*D1	C5001	*E4	D3607	N1
C243	M2	C1027	*J10	C1118	*J7	C1219	*N6	C1310	*P8	C1511	*L8	C1729	*L10	C1846	*M11	C2089	*B8	C2180	*B6	C2281	*G7	C2372	*F10	C2800	L11	C3601	*D1	C5002	E4	D3608	N1
C244	M2	C1028	*J10	C1119	*J6	C1220	*N6	C1311	*P9	C1512	*M8	C1730	*L9	C1847	*M11	C2090	*B8	C2181	*B6	C2282	*G7	C2373	*F10	C2801	L11	C3602	*D1	C5003	E4	D3609	N1
C245	M2	C1029	*J10	C1120	*K6	C1221	*N6	C1312	*N9	C1513	*M8	C1731	*L10	C2000	A10	C2091	*B8	C2182	*B6	C2283	*G7	C2374	*G9	C2802	L12	C3603	*D1	C5004	E4	D3610	N1
C246	M3	C1030	*J10	C1121	*K7	C1222	*N6	C1313	*N8	C1514	*M8	C1732	*L11	C2001	A10	C2092	*B8	C2183	*B6	C2284	*G7	C2375	*G9	C2803	L12	C3604	*C3	C5005	E4	D3611	N1
C247	N4	C1031	*J10	C1122	*K6	C1223	*N6	C1314	*N9	C1515	*L8	C1733	*M10	C2002	A10	C2093	*B8	C2184	*B5	C2285	*G7	C2376	*G10	C2804	L12	C3605	*C3	C5006	F4	D3612	N1
C248	M4	C1032	*J10	C1123	*K6	C1224	R5	C1315	*N9	C1516	*L8	C1734	*M11	C2003	A9	C2094	*B8	C2185	*B5	C2286	*G7	C2377	*G10	C2805	L12	C3606	*C3	C5007	*F4	D3613	N1
C249	M4	C1033	*J10	C1124	*K7	C1225	*P5	C1316	*N8	C1517	*L8	C1735	*L10	C2004	A9	C2095	A7	C2186	*B6	C2287	*G7	C2378	*G9	C2806	L11	C3607	*C3	C5008	E4	D3614	N1
C300	J10	C1034	*J10	C1125	*J8	C1226	*P5	C1317	*P9	C1518	*L8	C1736	*M11	C2005	C10	C2096	A7	C2187	*B5	C2288	*G7	C2379	*G10	C2807	L11	C3608	*C3	C5009	*E4	D3615	N1
C301	J10	C1035	*J9	C1126	*J8	C1227	*P6	C1318	*P9	C1519	*M8	C1737	*M11	C2006	B10	C2097	A7	C2188	*B5	C2289	*G8	C2380	*G10	C2808	L12	C3609	*D1	C5010	F4	D3616	N1
C302	J10	C1036	*J9	C1127	*J7	C1228	*P6	C1319	*P9	C1520	*M8	C1738	*M11	C2007	*C10	C2098	A7	C2189	*B6	C2290	*G8	C2381	*G9	C2809	L12	C3610	*C3	C5011	E4	D3617	N1
C303	J11	C1037	*J10	C1128	*J7	C1229	*P5	C1320	*N9	C1521	*M8	C1739	*M11	C2008	*C10	C2099	A7	C2200	H6	C2291	*G7	C2382	*G10	C2810	L11	C3611	*C3	C5012	E4	D3618	N1
C304	J11	C1038	*J9	C1129	*J8	C1230	*P6	C1321	*N9	C1522	*L7	C1740	*M10	C2009	*B10	C2100	*C8	C2201	H6	C2292	*G8	C2383	*G10	C2811	L11	C3612	*C3	C5013	F4	D3619	N1
C305	J11	C1039	*J9	C1130	*J7	C1231	*P6	C1322	*N9	C1523	*M6	C1741	*L11	C2010	*B10	C2101	*B8	C2202	H6	C2293	*G8	C2384	*G10	C2812	L12	C3613	*D2	C5014	F4	D3620	N1
C306	J11	C1040	*J10	C1131	*J7	C1232	*P5	C1323	*N9	C1524	*M8	C1742	*L11	C2011	*C10	C2102	*B7	C2203	H6	C2294	*G7	C2385	*G10	C2813	L12	C3614	C2	C5015	*E4	D4000	F1
C307	J11	C1041	H9	C1132	*J8	C1233	*P6	C1324	*N9	C1525	*L8	C1743	*L10	C2012	*C10	C2103	*C7	C2204	H6	C2295	H8	C2386	*G10	C2814	L11	C3615	G1	C5016	*E4	D4001	F1
C310	N5	C1042	H9	C1133	*J7	C1234	*P6	C1325	*P8	C1526	*M8	C1744	*L11	C2013	*C10	C2104	*C8	C2205	G5	C2296	H8	C2387	*G10	C2815	L11	C3616	M1	C5017	*E4	D4002	G1
C311	N5	C1043	H8	C1134	*J7	C1235	*P6	C1326	*P8	C1527	*L8	C1745	*M11	C2014	*C10	C2105	*C7	C2206	G5	C2297	H8	C2388	*G10	C2816	K11	C3617	N1	C5018	F4		
C312	N5	C1044	H8	C1135	*J7	C1236	*P6	C1327	*P8	C1528	*M8	C1746	*M10	C2015	*C10	C2106	*C7	C2207	*F5	C2298	H9	C2389	*G10	C2817	K11	C3618	*D4	C5019	E5	DD200	P3
C313	N5	C1045	H8	C1136	*J7	C1237	*P6	C1328	*P8	C1529	*M7	C1747	*L11	C2016	*C10	C2107	*C8	C2208	*G5	C2299	H9	C2500	*E6	C2818	K11	C3619	*C3	C5020	E5	DD201	N3
C314	N5	C1046	*J9	C1137	*J7	C1238	*P6	C1329	*P8	C1530	*M8	C1748	*L11	C2017	*B10	C2108	A7	C2209	*G5	C2300	*G8	C2501	*E7	C2819	K11	C3620	*C3	C5021	*E5	DD202	P5
C315	M5	C1047	*J9	C1138	*J7	C1239	*P6	C1330	*P8	C1531	M8	C1749	*L11	C2018	*B9	C2109	*C7	C2210	*G6	C2301	*G8	C2502	*D8	C2843	*E7	C3621	*D3	C5022	E5	DD203	B2
C316	M5	C1048	*J9	C1139	*J7	C1240	*P6	C1331	*P8	C1532	*L8	C1750	*M10	C2019	*C9	C2110	*B7	C2211	*F6	C2302	*G8	C2503	*D8	C2844	*D7	C3622	*C3	C5023	E5	DD204	M3
C317	M5	C1049	*K9	C1140	*J7	C1241	R7	C1332	*P8	C1533	*L8	C1751	*L10	C2020	*C10	C2111	*B7	C2212	*F5	C2303	*F8	C2504	*D8	C2845	*D8	C3623	*D3	C5024	E5		
C320	B5	C1050	*K9	C1141	*J7	C1242	R7	C1333	*P8	C1534	*M8	C1752	*L11	C2021	*C9	C2112	*C7	C2213	*F6	C2304	*F8	C2505	*E8	C3000	H1	C3624	*D3	C5025	E5	E200	C12
C321	B5	C1051	*K9	C1142	*J7	C1243	R7	C1334	*P8	C1535	*M7	C1753	*M10	C2022	*C9	C2113	*C7	C2214	*F6	C2305	*F8	C2506	*E8	C3001	C1	C3625	*D3	C5026	E5	E201	*C12
C322	B5	C1052	*K9	C1143	*J6	C1244	R7	C1335	*P9	C1536	*L7	C1754	*M11	C2023	*C10	C2114	*C7	C2215	*F5	C2306	*F8	C2507	*D8	C3002	C1	C3626	*D3			E202	B1
C323	B5	C1053	*K9	C1144	*J6	C1245	R7	C1336	*P9	C1537	*L7	C1755	*L10	C2024	A10	C2115	*C7	C2216	*G6	C2307	*F8	C2508	*D8	C3003	B1	C3627	*C3	CL1500	*L7	E203	*B1
C324	B5	C1054	*J9	C1145	*J7	C1246	*P6	C1337	*P8	C1538	*M8	C1756	*L11	C2025	*B10	C2116	*C7	C2217	*G6	C2308	H8	C2509	*E8	C3004	C1	C3628	*C3	CL1501	*L7	E204	R12
C325	B5	C1055	*J9	C1146	*J6	C1247	*P6	C1338	*P9	C1539	*M8	C1757	*M11	C2026	*B10	C2117	*C7	C2218	*G6	C2309	*G8	C2510	*E8	C3005	C1	C3629	*C3	CL1502	*L7	E205	*R12
C326	B5	C1056	*J8	C1147	*J6	C1248	*P7	C1339	*P9	C1540	*L8	C1758	*M10	C2027	*B10	C2118	*B7	C2219	*F6	C2310	*G8	C2511	*D8	C3006	H5	C3630	*D3	CL1503	*L7	E206	R1
C327	B5	C1057	*K8	C1148	*J7	C1249	*N7	C1340	*P8	C1541	*L8	C1759	*L11	C2028	*B10	C2119	*B6	C2220	*F6	C2311	*G9	C2512	*E8	C3100	*J1	C3631	*C3	CL1510	*M7	E207	*R1
C330	G11	C1058	*K9	C1149	H6	C1250	*N6	C1341	*P9	C1542	*L8	C1760	*L11	C2029	*B10	C2120	*C6	C2221	*F6	C2312	*F9	C2513	*E8	C3101	*J1	C3632	*C3	CL1511	*M7	E208	H7
C331	G11	C1059	*K8	C1150	H6	C1251	*N7	C1342	*P9	C1543	*L7	C1761	*M11	C2030	*B10	C2121	*C7	C2222	*F6	C2313	*F8	C2514	*E8	C3102	*J1	C3633	*C3	CL1512	*M7	E209	*H7
C332	G11	C1060	*K8	C1151	H6	C1252	*N7	C1343	*P9	C1544	*M8	C1762	*M10	C2031	*B10	C2122	*C6	C2223	*F6	C2314	*F9	C2515	*D8	C3103	*J1	C3634	*C3	CL1513	*M7		
C333	G11	C1061	*K9	C1152	H6	C1253	*N6	C1344	*P9	C1545	*L8	C1763	*L10	C2032	*B10	C2123	*C6	C2224	H5	C2315	*F9	C2516	*D8	C3104	K3	C3635	*D3	CL1808	M10	F1	B13
C334	G11	C1062	H8	C1153	H6	C1254	*P7	C1345	*P9	C1546	*L8	C1764	*L10	C2033	*B10	C2124	*C7	C2225	*G5	C2316	*F8	C2517	*D8	C3105	J1	C3636	*C3	CL1809	M10	F200	P2
C335	G11	C1063	*J8	C1154	J5	C1255	*P7	C1346	*P9	C1547	*M7	C1765	*M11	C2034	*B10	C2125	*B8	C2226	*G5	C2317	*G9	C2518	*D8	C3106	J1	C3637	*D3	CL1810	M10	F201	N2
C336	G11	C1064	*J8	C1155	J5	C1256	*P7	C1347	*P9	C1548	*M7	C1766	*L11	C2035	*B9	C2126	*B8	C2227	*G6	C2318	*G9	C2519	*E8	C3107	*J1	C3638	*C3	CL1811	M10	F202	R4
C337	F11	C1065	*J8	C1156	H5	C1257	*N7	C1348	*P9	C1549	*L7	C1767	*M10	C2036	*B9	C2127	*B7	C2228	*G6	C2319	*G9	C2520	*E8	C3108	*J1	C3639	*D3	CL1812	M11	F203	A2
C400	P11	C1066	*K8	C1157	*J6	C1258	*N7	C1349	R9	C1550	*L7	C1768	*L11	C2037	*B10	C2128	*B7	C2229	*G5	C2320	*F9	C2521	*E8	C3109	*J1	C3640	*C3	CL1820	K11	F204	M2
C401	P11	C1067	*K8	C1158	*J6	C1259	*N7	C1350	R9	C1551	*M8	C1769	*L11	C2038	*B9	C2129	*B8	C2230	*G6	C2321	*F9	C2522	*D7	C3110	F2	C3641	*C3	CL1821	L10		
C402	P11	C1068	*K8	C1159	*J6	C1260	*N7	C1351	R9	C1552	*L8	C1770	*M11	C2039	*B9	C2130	*B7	C2231	*G6	C2322	*F9	C2523	*E6	C3111	F2	C3642	*C3	CL1840	M7	FB1500	*M8
C403	N11	C1069	*K8	C1160	*K6	C1261	*N7	C1352	R10	C1553	*M8	C1771	*M11	C2040	*B10	C2131	*B7	C2232	*G5	C2323	*F9	C2524	*E8	C3200	*C3	C3643	*C3	CL1841	L7	FB1700	*L11
C404	P11	C1070	*K8	C1161	*K6	C1262	R7	C1353	R10	C1554	*L8	C1772	*M10	C2041	A9	C2132	*B8	C2233	*G6	C2324	*F9	C2525	*D8	C3201	C2	C3644	*C3	CL2500	*E7	FB1800	*M11
C405	B11	C1071	*J9	C1162	*K6	C1263	*P7	C1354	P10	C1555	*M8	C1773	*M11	C2042	A9	C2133	*B7	C2234	*G6	C2325	*G8	C2526	*E8	C3202	C2	C3645	*C3	CL2501	*D7	FB2500	*E8
C406	B11	C1072	*J9	C1163	*K6	C1264	*P7	C1355	P10	C1556	*L8	C1774	*L10	C2043	A8	C2134	*B7	C2235	*G6	C2326	*G8	C2527	*D8	C3300	J2	C3700	C3	CL2502	*D7	FB2800	*L11
C407	B11	C1073	*J9	C1164	*K6	C1265	*P8	C1356	R10	C1557	*M7	C1775	*L10	C2044	A8	C2135	*B7	C2236	*G6	C2327	*G8	C2528	*E8	C3301	K2	C3701	C3	CL2503	*D7	FB3000	C1

FB3001	C2	IC2205	G8	Q505	K1	R515	*K1	R1072	J7	R1281	P10	R2015	*C9	R2224	G6	R2805	L11	R3502	H11	R3808	*E7	RB1006	K10	RB1237	N8	RB2208	F6	RB3305	K3
FB3002	C1	IC2206	G8	Q506	*K2	R516	*K1	R1073	J6	R1500	M8	R2016	C9	R2225	*G7	R2806	L11	R3503	J10	R3809	*E7	RB1007	K10	RB1238	N9	RB2209	G5	RB3306	J3
FB3003	C2	IC2207	G9	Q507	K1	R517	*K1	R1074	K6	R1501	M8	R2017	B8	R2226	G7	R2807	L11	R3504	*C3	R3810	*M7	RB1008	K9	RB1239	N9	RB2210	G6	RB3307	J3
FB3500	J11	IC2208	G9	Q508	*K1	R518	*K1	R1075	K5	R1502	L8	R2018	*C9	R2227	*G7	R2808	*L11	R3505	*C3	R3811	*M7	RB1009	J10	RB1240	N9	RB2211	G6	RB3308	K3
FB3501	H6	IC2209	G10	Q509	K1	R519	K1	R1076	J6	R1503	L8	R2019	C9	R2228	G7	R2809	*L11	R3506	*C3	R3812	*E8	RB1010	J10	RB1241	P8	RB2212	G6	RB3309	J3
FB5000	*F4	IC2210	G5	Q3500	*F1	R520	K1	R1077	J5	R1504	M7	R2020	B8	R2229	G8	R2810	*L11	R3507	*C3	R3813	*M8	RB1011	J10	RB1242	P8	RB2213	H7	RB3310	J3
FB5001	*E4	IC2211	G6			R521	*K2	R1078	K10	R1505	M7	R2021	*C8	R2230	*F8	R2811	*L11	R3508	*C3	R3814	*E8	RB1012	J9	RB1243	P8	RB2214	H7	RB3311	K3
FB5002	*E5	IC2212	G6	R200	M4	R522	*K2	R1079	J10	R1506	L7	R2022	C8	R2231	F8	R2853	E7	R3509	C3	R3815	*E8	RB1013	H9	RB1244	P9	RB2215	H7	RB3312	*J3
FB5003	E5	IC2213	G7	R201	A12	R523	*K1	R1080	J5	R1507	L7	R2023	*B9	R2232	G9	R2854	E7	R3510	C3	R3816	*M8	RB1014	H9	RB1245	P9	RB2216	H7	RB3313	*J3
		IC2214	G7	R202	J1	R524	*K1	R1081	J5	R1508	*M8	R2024	B9	R2233	*F8	R2855	*E7	R3511	C3	R3817	*M8	RB1015	H8	RB1246	P9	RB2217	H7	RB3314	*J3
IC1	L11	IC2215	G8	R203	J1	R525	*K2	R1200	N5	R1509	*M8	R2025	*B9	R2234	F8	R2856	*E7	R3512	C4	R3820	*L10	RB1016	H8	RB1247	R9	RB2218	F6	RB3315	*J3
IC3	L8	IC2216	G8	R204	M4	R526	K1	R1201	P5	R1510	*L8	R2026	B9	R2235	G9	R2857	*D7	R3513	C4	R3821	*L10	RB1017	H8	RB1248	R9	RB2219	F7	RB3316	*K3
IC4	E8	IC2217	G9	R205	P3	R527	K1	R1202	P5	R1511	*L8	R2027	*B8	R2236	*F9	R2858	*D8	R3514	C4	R3824	*L10	RB1018	K9	RB1249	R9	RB2220	F7	RB3317	*J3
IC30	*M7	IC2218	G9	R206	*R3	R528	*K1	R1203	P5	R1512	*M7	R2028	B8	R2237	F9	R3000	J1	R3515	C4	R3825	*L10	RB1019	K9	RB1250	R10	RB2221	F7	RB3318	*J3
IC40	*E7	IC2219	G10	R207	*R3	R529	*K1	R1204	P6	R1513	*M7	R2029	B7	R2238	*G8	R3001	J1	R3516	D3	R3828	*L10	RB1020	K9	RB1251	R10	RB2222	F7	RB3319	*J3
IC300	J11	IC3000	C1	R208	*R3	R530	*K1	R1205	*N5	R1514	*L7	R2030	*C8	R2239	G8	R3100	*J1	R3517	C4	R3829	*L10	RB1021	K8	RB1252	N9	RB2223	F8	RB3320	*K3
IC310	M5	IC3001	C3	R209	P4	R531	*K1	R1206	N5	R1515	*L7	R2031	C7	R2240	*G8	R3101	*J1	R3518	C4	R3831	*M10	RB1022	K8	RB1253	N10	RB2224	G6	RB3321	*K3
IC320	B5	IC3100	*J1	R210	N3	R532	K1	R1207	P6	R1516	*M8	R2032	B7	R2241	G8	R3102	K3	R3519	C4	R3834	*M10	RB1023	K8	RB1254	N10	RB2225	G7	RB3322	*K3
IC330	G11	IC3101	*J1	R211	*P3	R533	K1	R1208	*N6	R1517	*M8	R2033	*C7	R2242	*G9	R3103	K3	R3520	D3	R3835	*M10	RB1024	J9	RB1255	N10	RB2226	G7	RB3323	*K3
IC400	P11	IC3102	L3	R212	*P3	R1000	K10	R1209	N6	R1518	*L8	R2034	C7	R2243	G9	R3104	L3	R3521	D3	R3836	*D8	RB1025	J9	RB1256	P9	RB2227	G7	RB3400	H3
IC401	B11	IC3103	*J1	R213	*P3	R1001	J10	R1210	*P5	R1519	*L8	R2035	B6	R2244	G10	R3105	L3	R3522	D3	R3837	*D8	RB1026	J9	RB1257	P10	RB2228	G7	RB3401	G3
IC402	C11	IC3104	*J1	R214	N4	R1002	J10	R1211	P5	R1520	*M7	R2036	*C7	R2245	G10	R3106	L3	R3523	D3	R3838	*M11	RB1027	J8	RB1258	P10	RB2229	G8	RB3402	H3
IC450	D1	IC3105	*J1	R215	P4	R1003	J10	R1212	*P6	R1521	*M7	R2037	C6	R2246	G10	R3107	L3	R3524	C4	R3839	*M11	RB1028	J8	RB1259	P10	RB2230	H8	RB3403	G3
IC500	*L1	IC3106	F2	R216	*P5	R1004	J10	R1213	P6	R1522	*L7	R2038	*B8	R2247	G10	R3108	L3	R3525	*C4	R3900	D1	RB1029	J8	RB2000	A10	RB2231	H8	RB3404	G3
IC501	*K1	IC3107	F2	R217	*P5	R1005	*K10	R1214	P7	R1523	*L7	R2039	B7	R2248	G10	R3109	L3	R3526	D4	R3901	D1	RB1030	H7	RB2001	A10	RB2232	H8	RB3405	H3
IC502	*K1	IC3200	C2	R218	*P5	R1006	K10	R1215	*N6	R1524	*M7	R2040	*B7	R2249	*F9	R3110	J1	R3527	C4	R3902	D1	RB1031	H7	RB2002	A10	RB2233	H9	RB3406	G3
IC1100	J10	IC3300	J3	R219	*P5	R1007	J9	R1216	N6	R1525	*M7	R2041	B7	R2250	F9	R3111	*J1	R3528	*C4	R3903	D1	RB1032	H7	RB2003	A9	RB2234	H9	RB3407	G3
IC1101	J10	IC3301	J3	R220	M4	R1008	*K10	R1217	P7	R1526	*M7	R2042	*B7	R2251	G10	R3112	*J1	R3529	C4	R3904	D1	RB1033	H7	RB2004	A9	RB2235	F8	RB3408	H3
IC1102	J9	IC3302	K3	R221	A3	R1009	K10	R1218	*N7	R1527	*M7	R2043	B6	R2252	*F10	R3113	*J1	R3530	*C4	R3905	D1	RB1034	H7	RB2005	C10	RB2236	F8	RB3409	G3
IC1103	J8	IC3400	G3	R222	*B2	R1010	*J10	R1219	N7	R1700	*M11	R2044	B5	R2253	F10	R3114	*J1	R3531	C4	R3906	D1	RB1035	K8	RB2006	C10	RB2237	F8	RB3410	G3
IC1104	J8	IC3401	G3	R223	*B2	R1011	J10	R1220	P8	R1701	*M11	R2045	B5	R2254	*G9	R3115	*J1	R3532	*F1	R3907	D3	RB1036	K7	RB2007	C10	RB2238	F9	RB3411	H3
IC1105	J7	IC3402	H3	R224	*B2	R1012	*J10	R1221	*N7	R1702	*L10	R2046	B5	R2255	G9	R3116	*J1	R3533	F1	R3908	D3	RB1037	K7	RB2008	C9	RB2239	F9	RB3412	*H3
IC1106	J7	IC3500	J10	R225	*B2	R1013	J10	R1222	N7	R1703	*L11	R2047	B5	R2256	*G10	R3117	*J1	R3534	H5	R3909	*D7	RB1038	K7	RB2009	B10	RB2240	F9	RB3413	*G3
IC1107	J6	IC3501	C4	R226	B4	R1014	J9	R1223	*P6	R1704	*L10	R2048	B6	R2257	G10	R3118	*J1	R3535	H5	R3910	*L11	RB1039	K7	RB2010	B10	RB2241	G8	RB3414	*G3
IC1108	J6	IC3502	H5	R227	M3	R1015	*K9	R1224	P6	R1705	*L10	R2049	*C6	R2258	F5	R3119	G2	R3536	H5	R3912	*L7	RB1040	K6	RB2011	B10	RB2242	G8	RB3415	*G3
IC1109	J5	IC3600	*D1	R228	*N3	R1016	K9	R1225	*P7	R1800	M11	R2050	C6	R2259	F6	R3120	G2	R3600	*D1	R3913	H4	RB1041	J8	RB2012	B9	RB2243	G8	RB3416	*G3
IC1110	J10	IC3601	*D1	R229	*N3	R1017	J8	R1226	P7	R1801	M11	R2051	B5	R2260	G5	R3121	G2	R3601	*D2	R3914	H4	RB1042	J7	RB2013	A9	RB2244	G9	RB3417	*G3
IC1111	J10	IC3602	*D2	R230	*N3	R1018	*K9	R1227	*P7	R1802	M11	R2052	*C6	R2261	G6	R3122	G2	R3602	D3	R3915	H4	RB1043	J7	RB2014	A9	RB2245	G9	RB3418	*G3
IC1112	J9	IC3603	C2	R231	*N3	R1019	K9	R1228	P7	R1803	M11	R2053	C5	R2262	F6	R3123	F2	R3603	*D2	R3916	H4	RB1044	J7	RB2015	A8	RB2246	G9	RB3419	*G3
IC1113	J8	IC3604	G1	R232	M4	R1020	J8	R1229	P8	R1804	*M11	R2054	*B6	R2263	F7	R3124	F2	R3604	*D2	R4000	F3	RB1045	J7	RB2016	A8	RB2247	H9	RB3420	*H3
IC1114	J8	IC3605	M1	R300	J11	R1021	*K8	R1230	*N8	R1805	*M11	R2055	B6	R2264	F7	R3125	F2	R3605	C3	R4001	F3	RB1046	J6	RB2017	A8	RB2248	H9	RB3421	*H3
IC1115	J7	IC3606	N1	R301	J11	R1022	K8	R1231	N8	R1806	*M11	R2056	*B6	R2265	G6	R3126	F2	R3606	C3	R4002	F3	RB1047	H6	RB2018	C9	RB2249	H9	RB3422	*H3
IC1116	J7	IC3700	C3	R302	J11	R1023	*J9	R1232	P9	R1807	*M11	R2057	B5	R2266	G7	R3127	F2	R3607	C2	R4003	F3	RB1048	H6	RB2019	C9	RB2250	H10	RB3423	*H3
IC1117	J6	IC3701	D3	R303	B5	R1024	J9	R1233	*N8	R1808	M12	R2058	C10	R2267	G7	R3128	F2	R3608	*C3	R4004	F3	RB1049	H6	RB2020	C9	RB2251	H10	RB3600	*C3
IC1118	J6	IC3900	D1	R310	M5	R1025	*J9	R1234	N8	R1809	M12	R2059	C9	R2268	F8	R3129	F2	R3609	*C3	R4005	F3	RB1050	H6	RB2021	C8	RB2252	F9	RB3601	*C3
IC1119	J5	IC4000	G1	R311	M5	R1026	J9	R1235	P9	R1810	M12	R2060	B10	R2269	F8	R3130	F2	R3610	*C3	R4006	F3	RB1051	H6	RB2022	C8	RB2253	F10	RB3602	N1
IC1200	P5	IC5000	E4	R312	M5	R1027	*J8	R1236	*N9	R1811	M12	R2061	B9	R2270	F9	R3131	F2	R3611	*C2	R4007	F3	RB1052	K6	RB2023	C8	RB2254	F10	RB3603	N1
IC1201	P6	IC5001	E5	R320	B5	R1028	J8	R1237	N9	R1830	M10	R2062	C9	R2271	G8	R3132	F2	R3612	*C3	R4008	F1	RB1053	K6	RB2024	B9	RB2255	F10	RB3604	N1
IC1202	P6			R321	B5	R1029	J7	R1238	*P8	R1831	M10	R2063	C8	R2272	G8	R3133	F2	R3613	*C3	R4009	F1	RB1054	K6	RB2025	B9	RB2256	G9	RB3605	N1
IC1203	P7	L400	B11	R322	B5	R1030	*K8	R1239	P8	R1832	M10	R2064	C8	R2273	G9	R3134	F2	R3614	*C3	R4010	E3	RB1055	K5	RB2026	B9	RB2257	G10	RB3700	C3
IC1204	P7	L1700	*M11	R330	G11	R1031	K7	R1240	*P8	R1833	M10	R2065	B9	R2274	F10	R3200	*D3	R3615	D3	R4011	E3	RB1056	J6	RB2027	B8	RB2258	G10	RB3701	C3
IC1205	P8	L1701	*L11	R331	G11	R1032	J7	R1241	P8	R1834	*L10	R2066	B8	R2275	F10	R3201	*C3	R3616	*D3	R4012	E3	RB1057	J6	RB2028	B8	RB2259	G10	RB3702	C3
IC1206	P8	L1702	*M11	R332	F11	R1033	*K7	R1242	*P9	R1840	*M10	R2067	B8	R2276	G10	R3202	*C3	R3617	C2	R4013	E3	RB1058	J6	RB2029	B8	RB3000	B1	RB3703	B3
IC1207	P9	L1703	*L11	R400	P11	R1034	K7	R1243	P9	R1841	*M11	R2068	C7	R2277	G10	R3203	*D3	R3618	C2	R4014	*E2	RB1059	J5	RB2030	A7	RB3001	H2	RB3704	E3
IC1208	P9	L1704	*M11	R401	P11	R1035	J6	R1244	P10	R1842	*M11	R2069	C7	R2278	F5	R3204	D3	R3619	C2	R4015	*E2	RB1200	R6	RB2031	A7	RB3002	G2	RB3705	E3
IC1209	P10	L1705	*L11	R402	P11	R1036	*K7	R1245	P10	R1843	*M10	R2070	C6	R2279	G5	R3205	D3	R3620	C2	R4016	*E2	RB1201	R6	RB2032	A7	RB3003	G2	RB3706	E3
IC1210	P5	L1706	*M11	R403	P11	R1037	K6	R1246	P10	R1844	*M10	R2071	B7	R2280	G10	R3206	D3	R3621	C2	R4017	*E2	RB1202	R6	RB2033	A7	RB3004	G2	RB3707	E3
IC1211	P6	L1707	*L11	R404	P11	R1038	*J8	R1247	P10	R1845	*L10	R2072	B7	R2281	G10	R3207	*D3	R3622	C2	R4018	*F2	RB1203	R6	RB2034	A7	RB3005	G2	RB3708	*E3
IC1212	P6	L1708	*M11	R405	B11	R1039	J7	R1248	P10	R1846	*M11	R2073	B6	R2500	E8	R3208	*C3	R3623	D3	R4019	*F2	RB1204	R6	RB2035	C8	RB3006	G2	RB3709	*E3
IC1213	P7	L1709	*L11	R406	B11	R1040	*J7	R1249	*N9	R1847	L10	R2074	C6	R2501	E8	R3209	D3	R3624	D2	R4020	*F2	RB1205	N5	RB2036	C7	RB3007	G2	RB3710	*E3
IC1214	P7	L1710	*M11	R407	B11	R1041	J7	R1250	N9	R1848	L10	R2075	C5	R2502	D8	R3210	D3	R3625	D2	R4021	*F2	RB1206	N6	RB2037	C7	RB3008	G2	RB3711	*E3
IC1215	P8	L1711	*L11	R408	B11	R1042	*J7	R1251	P10	R1849	L10	R2076	B6	R2503	D8	R3211	*D3	R3626	*C3	R4022	F1	RB1207	N6	RB2038	C7	RB3009	*H2	RB3900	D2
IC1216	P8	L1712	*L11	R409	B11	R1043	J6	R1252	*N10	R1850	L10	R2077	B5	R2504	E7	R3212	D3	R3627	*C3	R4023	E1	RB1208	N6	RB2039	C7	RB3010	*G2	RB3901	D2
IC1217	P9	L1713	*M11	R410	C11	R1044	J5	R1253	N10	R1851	L10	R2078	C10	R2505	E7	R3213	D3	R3628	G1	R4024	G1	RB1209	P5	RB2040	C6	RB3011	*G2	RB3902	D2
IC1218	P9	L1714	*M11	R411	C11	R1045	J5	R1254	*P9	R1852	L10	R2079	B10	R2506	D7	R3214	D3	R3700	B3	R5000	E4	RB1210	P6	RB2041	B8	RB3012	*G2	RB3903	D2
IC1219	P10	L1715	*M11	R412	C11	R1046	J5	R1255	P9	R1853	M7	R2080	C5	R2507	D7	R3215	D3	R3701	C2	R5001	E4	RB1211	P6	RB2042	B7	RB3013	*G2		
IC2100	C10	L1716	*L11	R413	C11	R1047	J5	R1256	*P10	R1854	M7	R2081	B5	R2508	*E8	R3216	D3	R3702	C2	R5002	E4	RB1212	P6	RB2043	B7	RB3014	*G2	S3001	J1
IC2101	C10	L1717	*M11	R414	C11	R1048	J6	R1257	P10	R1855	*M7	R2200	G5	R2509	*E8	R3217	D3	R3703	*D3	R5003	F4	RB1213	R7	RB2044	B7	RB3015	*G2	S3100	J1
IC2102	C9	L1718	*L11	R415	*P11	R1049	*K6	R1258	N5	R1856	*M7	R2201	G5	R2510	*D8	R3218	D3	R3704	C2	R5004	E4	RB1214	R7	RB2045	B7	RB3016	*G2		
IC2103	C8	L1719	*L11	R450	E1	R1050	K6	R1259	N6	R1857	*L7	R2202	G5	R2511	*D8	R3219	*D3	R3705	*D3	R5005	E4	RB1215	R7	RB2046	B6	RB3017	H2	SORI01	A5
IC2104	C8	L1720	*M11	R451	E1	R1051	J5	R1260	P5	R1858	*L8	R2203	G5	R2512	*E7	R3220	D3	R3706	C3	R5006	E4	RB1216	R7	RB2047	A6	RB3018	H2	SORI02	R5
IC2105	C7	L1721	*L11	R452	E1	R1052	*K6	R1261	P6	R1859	*L11	R2204	G6	R2513	*E7	R3221	*D3	R3707	*C3	R5007	E4	RB1217	R7	RB2048	A6	RB3019	H2		
IC2106	C7	L1722	*M11	R453	E1	R1053	K5	R1262	N6	R1860	*L11	R2205	*F5	R2514	*D7	R3222	D3	R3708	C3	R5008	E4	RB1218	N6	RB2049	A6	RB3020	H2	T4001	E3
IC2107	C6	L1723	*L11	R454	E1	R1054	*J6	R1263	N7	R1861	*L11	R2206	F5	R2515	*D7	R3223	*C3	R3709	*C3	R5009	E5	RB1219	N7	RB2050	A6	RB3021	H2		
IC2108	C6	L1724	*M11	R455	K1	R1055	J6	R1264	N7	R1862	*L11	R2207	G6	R2516	*E8	R3224	D3	R3710	*D3	R5010	E5	RB1220	N7	RB2051	A6	RB3022	H2	TP200	M4
IC2109	C5	L1725	*L11	R456	K1	R1056	*J6	R1265	P6	R1863	*L11	R2208	*F6	R2517	*E8	R3225	D3	R3711	D3	R5011	E5	RB1221	N7	RB2052	C6	RB3023	H2	TP201	A12
IC2110	B10	L1726	*M10	R500	*K1	R1057	J5	R1266	P7	R2000	C10	R2209	F6	R2518	*D8	R3226	*D3	R3712	D3	R5012	E5	RB1222	N7	RB2053	C6	RB3024	*H2	TP202	P4
IC2111	B10	L3500	*C4	R501	*K1	R1058	K10	R1267	P7	R2001	C10	R2210	*G5	R2519	*D8	R3227	D3	R3713	D3	R5013	E5	RB1223	N8	RB2054	C6	RB3025	*H2	TP203	N4
IC2112	B9			R502	*K1	R1059	K9	R1268	N8	R2002	B10	R2211	G5	R2520	*E7	R3228	*D3	R3714	D3	R5014	E5	RB1224	P6	RB2055	C5	RB3026	*H2	TP204	M4
IC2113	B8	Q200	M4	R503	*L1	R1060	J10	R1269	N8	R2003	B10	R2212	*G6	R2521	*E7	R3229	D3	R3715	D3	R5015	E5	RB1225	P7	RB2056	B6	RB3027	*H2	TP205	B4
IC2114	B8	Q201	P3	R504	*L1	R1061	J9	R1270	N9	R2004	B10	R2213	G6	R2522	*D7	R3230	D3	R3716	*D3	R5016	E5	RB1226	P7	RB2057	B6	RB3028	*H2	TP206	M4
IC2115	B7	Q202	N3	R505	*L1	R1062	K9	R1271	P8	R2005	*C10	R2214	G7	R2523	*D7	R3231	D3	R3717	D3	R5017	E5	RB1227	P7	RB2058	B6	RB3029	*H2	TP400	P11
IC2116	B7	Q203	N4	R506	*L1	R1063	K8	R1272	P8	R2006	C10	R2215	*F6	R2524	*E7	R3232	D3	R3718	D3	R5018	E5	RB1228	P7	RB2059	B5	RB3030	*H2	TP401	B11
IC2117	B6	Q204	A3	R507	L1	R1064	K8	R1273	P9	R2007	B9	R2216	F6	R2525	*E7	R3233	D3	R3800	*E7	R5019	E5	RB1229	P8	RB2200	H6	RB3031	*H1	TP402	C11
IC2118	B6	Q205	M3	R508	L1	R1065	J9	R1274	N10	R2008	*C10	R2217	G7	R2526	*E7	R3234	D3	R3801	*E7			RB1230	R8	RB2201	H6	RB3032	*H1	TP450	E2
IC2119	B5	Q450	K1	R509	*L2	R1066	J8	R1275	N10	R2009	C10	R2218	*F7	R2527	*E7	R3235	D3	R3802	*M7	RB1000	H10	RB1231	R8	RB2202	H6	RB3033	*H1	TP3100	M3
IC2200	G5	Q500	*L1	R510	*L1	R1067	J8	R1276	P10	R2010	*B10	R2219	F7	R2800	L12	R3236	D2	R3803	*M7	RB1001	H10	RB1232	R8	RB2203	H6	RB3300	J3	TP3500	H5
IC2201	G6	Q501	L1	R511	*L1	R1068	K7	R1277	P10	R2011	B10	R2220	G8	R2801	L12	R3237	C2	R3804	*E7	RB1002	H10	RB1233	R9	RB2204	H6	RB3301	K3		
IC2202	G6	Q502	*L2	R512	*L2	R1069	K7	R1278	N5	R2012	*B10	R2221	*F7	R2802	L12	R3238	D2	R3805	*E7	RB1003	H9	RB1234	R9	RB2205	F5	RB3302	K3	X3500	J11
IC2203	G7	Q503	K1	R513	K1	R1070	K6	R1279	P5	R2013	B10	R2222	F7	R2803	L12	R3500	J11	R3806	*L7	RB1004	H9	RB1235	N8	RB2206	F6	RB3303	J3	X3501	H5
IC2204	G7	Q504	*K1	R514	K1	R1071	J7	R1280	P10	R2014	B9	R2223	*G6	R2804	L11	R3501	H10	R3807	*L7	RB1005	K10	RB1236	N8	RB2207	F6	RB3304	J3	X5000	E5

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer :

Check the metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 3.5 mA. Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 5.25 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 20 V AC range are suitable. (See Fig. A)

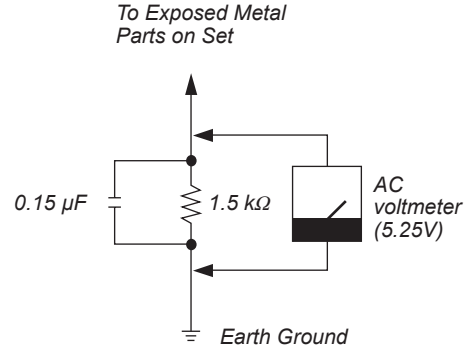

Fig A. Using an AC voltmeter to check AC leakage.

MVS-8000X (SY)
MVS-7000X (SY) J, E
9-968-744-03

Sony Corporation

Printed in Japan
2011. 6 08
©2010