

## Chapter 17 Files

---

<b>Operations on Individual Files .....</b>	<b>426</b>
Displaying the Individual File Operation Menus .....	426
Viewing Detailed File Information .....	426
Selecting Regions .....	428
Selecting a Device for Operations .....	428
Saving Files .....	429
Loading Files .....	430
Copying Files .....	431
Renaming Files .....	432
Deleting Files .....	432
<b>File Batch Operations .....</b>	<b>434</b>
Displaying the Batch Operation Menu .....	434
Batch Saving Files .....	434
Batch Loading Files .....	435
Batch Copying Files .....	435
Batch Deleting Files .....	436
<b>Importing and Exporting Files .....</b>	<b>437</b>
Displaying the Import/Export Menu .....	437
Importing Frame Memory Data .....	437
Exporting Frame Memory Data .....	438
<b>Directory Operations .....</b>	<b>439</b>
Displaying the Directory Menu .....	439
Creating a New Directory .....	439
Renaming a Directory .....	439
Deleting a Directory .....	440
<b>Copying Files Between Different Unit IDs .....</b>	<b>441</b>
<b>Saving Files Recalled by Autoload .....</b>	<b>443</b>

---

# Operations on Individual Files

You can save or load the contents of an individual file or register. Carry out these operations in the File menu.

---

## Displaying the Individual File Operation Menus

Use the following procedure.

- 1** In the menu control block, press the top menu selection button [FILE].
- 2** Depending on the type of file to be manipulated, select the following ‘VF’ and ‘HF’ combination.

Button	HF1	HF2	HF3	HF4
<b>VF1</b>	Setup	Initial Status	Key Memory	Video Proc Memory
<b>VF2</b>	Effect 1-99	Effect 101-199	Effect 201-299	Effect 301-399
<b>VF3</b>	Snapshot	Wipe Snapshot	DME Snapshot	Key Snapshot
<b>VF4</b>	Shotbox	Macro	Macro Attachment	—
<b>VF5</b>	Frame Memory	—	—	—

The following description refers to the example of carrying out operations on snapshot files, but the procedure is similar in the other menus.

---


## Viewing Detailed File Information

As an example, to view detailed snapshot file information, carry out the following procedure.

- 1** In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’

The Snapshot menu appears.

The status area shows the device status, and a list of files present on the device.

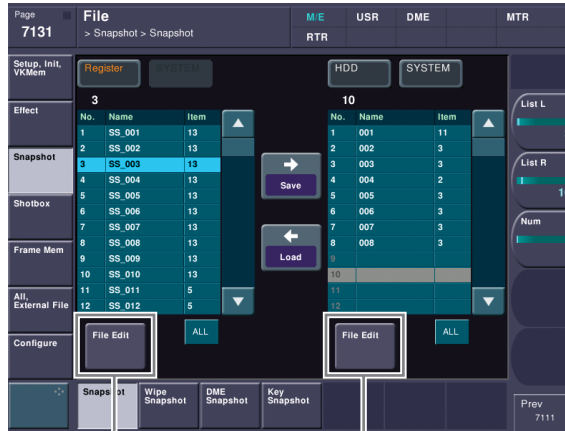

## 2 Press [File Edit].

The file details appear (reference region file name, creation date, regions including data) in table form.



Selecting a particular file displays more detailed information about that file in the detail display area at the top right of the file list.

---

## Selecting Regions

You can carry out a file operation on a number of regions simultaneously. However, a region selection is not required for the following files.

- Key memory
- Video process memory
- Shotbox
- Macro
- Macro attachment
- Frame memory
- Setup
- Initial status

In the above list, for frame memory in Dual Simul mode you can select the switcher to be used for the operation in a way similar to the region selection. For setup and initial status, you can similarly separate the files to be operated on by device.

### To make a region selection

Use the following procedure.

- 1** Press the region selection area at the top right of the screen (*see page 427*).  
The region selection window appears.
- 2** Press the region names you do not want to select, turning them off.
- 3** Press [OK].

---

## Selecting a Device for Operations

To carry out file operations, you need to specify the device holding the data (or file), as one of the following: register, hard disk, memory card, and so on. You can then further select a directory.

### Notes

- Files saved on the hard disk may be lost if the hard disk fails. Always keep separate backup copies of important files on a memory card.
- Format a memory card (*see page 297*) before using it for the first time.

As an example, to select a memory card, use the following procedure.

- 1** In the File menu, press the device selection indication above the file list (default is [HDD] (hard disk)).  
(If [Memory Card] appears, then since the memory card is already selected, steps **1** and **2** are not necessary.)

A pull-down menu appears.

- 2** Press [Memory Card].

This selects the memory card as the location holding the files.

- 3** To select a directory, in the device selection area, press [SYSTEM] (default setting).

If there are any directories on the memory card, a pull-down menu appears.

*To create a new directory, see “Creating a New Directory” (page 439).*

- 4** Press the name of the directory you want to use.

This selects the specified directory on the memory card to be manipulated.

---

## Saving Files

As an example, to save snapshot register data to hard disk or memory card, use the following procedure.

- 1** In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’
- 2** In the device selection area on the left, select [Register].
- 3** In the device selection area on the right, select [HDD] or [Memory Card], then select a directory.

*See “Selecting a Device for Operations” (page 428).*

- 4** Using either of the following methods, select the data to be saved, and the file in which to save it.
  - To select all files within the list, press [ALL] below the list.
  - To select multiple files, turn the knobs to select in the following ranges.



Knob	Parameter	Adjustment	Setting values
1	List L	Select the first register whose data is to be saved	1 to 99
2	List R	Select the first file to which data is to be saved	1 to 99
3	Num	Number of registers to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

## 5 Press [→ Save].

This saves the selected register data in the specified location.

If there is already data in the specified location, a confirmation message appears.

- Select “Yes” to overwrite the data.
- Select “No” to cancel saving all of the data.

---

## Loading Files

As an example, to load a snapshot file from hard disk or memory card to a register, use the following procedure.

- 1 In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’
- 2 In the device selection area on the left, select [Register].
- 3 In the device selection area on the right, select where the file is held ([HDD] or [Memory Card]), and then specify a directory.

*See “Selecting a Device for Operations” (page 428).*

- 4 Using any of the following methods, select the register to which you want to load, and the file to be loaded.
  - To select all files within the list, press [ALL] below the list.
  - To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first register into which the data is to be loaded	1 to 99
2	List R	Select the first file in which data is held	1 to 99
3	Num	Number to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

## 5 Press [← Load].

This loads the contents of the selected file from the specified location. (Setup data is first loaded.)

# Copying Files

You can copy files either within a directory or between directories, on the hard disk, or memory card.

As an example, to copy a snapshot file from memory card to hard disk, use the following procedure.

- 1 In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’
- 2 In the device selection area on the left, specify the location of the file to be copied (in this case [Memory Card] and a directory). (*See page 428.*)
- 3 In the device selection area on the right, select the destination of the copied file (in this case [HDD] and a directory).
- 4 Using any of the following methods, select the source and destination files.
  - To select all files within the list, press [ALL] below the list.
  - To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first copy source file	1 to 99
2	List R	Select the first destination file	1 to 99
3	Num	Number to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

## 5 Press [→ Copy].

This copies the selected file or files to the specified destination.

If there is already data in the specified location, a confirmation message appears.

- Select “Yes” to overwrite the data.
- Select “No” to cancel copying all of the files.

---

## Renaming Files

You can rename a file on the hard disk or memory card and a register for the snapshot or effect. As an example, to rename a snapshot file, use the following procedure.

- 1 In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’

The Snapshot menu appears. The status area shows the device status, and a list of files present on the device.

- 2 Press [File Edit].

A detailed list appears. Here too, you can select a device or specify a directory. (*See page 428.*)

- 3 Using any of the following methods, select the file you want to rename.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List	File selection	1 to 99

- 4 Press [Rename].

The keyboard window appears. (*See “Menu Operations” in Chapter 2 (Volume 1).*)

- 5 Enter a name of not more than eight characters, and press [Enter].

The name you have entered is reflected in the status area.

### Note

Within the switcher, the names for Initial Status and Setup data are fixed. You can change the file names on the hard disk or memory card, but the next time they are reloaded they will revert to the default names.

---

## Deleting Files

You can delete data from the hard disk or memory card and snapshot or effect data from a register. As an example, to delete a snapshot file, use the following procedure.



- 1 In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’

The Snapshot menu appears. The status area shows the device status, and a list of files present on the device.

- 2 Press [File Edit].

A detailed list appears. Here too, you can select a device or specify a directory. (*See page 428.*)

- 3 Using any of the following methods, select the file you want to delete.

- To select all files within the list, press [All] below the list.
- To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List	Select the first file	1 to 99
3	Num	Number to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

- 4 Press [Delete].

A confirmation message appears.

- Select “Yes” to delete.
- Select “No” to cancel the deletion.

---

# File Batch Operations

You can batch process all files or registers. Carry out these operations using the File>All, External File>All menu.

---

## Displaying the Batch Operation Menu

Use the following procedure.

- 1** Press the top menu selection button [FILE].
  - 2** Select VF6 'All, External File' and HF1 'All.'
- The All menu appears.

---

## Batch Saving Files

To save the data of all registers to hard disk or memory card, use the following procedure.

### Notes

- Files saved on the hard disk may be lost if the hard disk fails. Always keep separate backup copies of important files on a memory card.
- Format a memory card (*see page 297*) before using it for the first time.

- 1** In the device selection area of the All menu, select the destination for saving the files ([HDD] or [Memory Card] and directory). (*See page 428.*)
- 2** If there are registers you do not want to save, in the <Category> group, exclude them from the operation. To select all registers, press [All Select].

*For details of the data to which operations apply, see "Files" in Chapter 1 (Volume 1).*

- 3** Press [→ Save].

A confirmation message appears.

- Select "Yes" to carry out the batch save.
- Select "No" to cancel the batch save.

## Batch Loading Files

To load files from hard disk or memory card, use the following procedure.

- 1** In the device selection area of the All menu, select where the files are held ([HDD] or [Memory Card] and directory). (*See page 428.*)
- 2** If there are files you do not want to load, in the <Category> group, exclude them from the operation. To select all files, press [All Select].

*For details of the data to which operations apply, see “Files” in Chapter 1 (Volume 1).*

- 3** Press [← Load].

A confirmation message appears.

- Select “Yes” to carry out the batch load. (Setup data is first loaded.)
- Select “No” to cancel the batch load.

### To execute the load after clearing the data in the destination regions

Before pressing [← Load], press [CLR Before Load], turning it on.

The following categories of data can be cleared before execution of the load.

Effect, Snapshot, Wipe Snapshot, DME Wipe Snapshot, Key Snapshot, Shotbox, Macro

## Batch Copying Files

To copy files between the hard disk and a memory card, use the following procedure.

- 1** In the operating device selection section to the left of the All menu, select the storage location ([HDD] or [Memory Card] and directory) of the source files (*see page 428*).
- 2** In the operating device selection section to the right of the All menu, select the destination storage location ([HDD] or [Memory Card] and directory) (*see page 428*).
- 3** If there are files you do not want to copy, remove them from the selection in the <Category> group. To select all files, press [All Select].

*For details of the data to which the operation applies, see “Files” in Chapter 1 (Volume 1).*

## 4 Press [→ Copy].

This copies the selected files to the specified destination.

If there is already data present in the destination location, a confirmation message appears.

- Select “Yes” to overwrite.
- Select “No” to cancel copying all of the files.

---

## Batch Deleting Files

To delete files from hard disk or memory card, use the following procedure.

**1** In the device selection area of the All menu, select where the files are held ([HDD] or [Memory Card] and directory). (*See page 428.*)

**2** Press [Delete All].

A confirmation message appears.

- Select “Yes” to delete all files from the selected directory.
- Select “No” to cancel the batch delete.



# Importing and Exporting Files

You can import or export frame memory image data from or to external media.

**Import:** to transfer a file in a different format from hard disk or memory card to frame memory as image data.

**Export:** to change the file format of register data and save the data on hard disk or memory card.

To carry out these operations, use the File>All,External File>Import/Export menu.

*For details of the formats supported for import and export, see “Files” in Chapter 1 (Volume 1).*

## Displaying the Import/Export Menu

In the File menu, select VF6 ‘All, External File’ and HF2 ‘Import/Export.’ The list on the left shows the frame memory registers, and the list on the right shows the content of the external recording media.

## Importing Frame Memory Data

As an example, to import data in a bitmap format from a memory card to a frame memory register, use the following procedure.

*About the points you should take note of when importing data, see “Files” in Chapter 1 (Volume 1).*

- 1** In the Import/Export menu, press the device selection area on the left to select [Frame Memory (.BMP)].
- 2** Press the device selection area on the right to select [Memory Card]. It is not possible to select a directory.
- 3** Using any of the following methods, select the register into which the data is to be imported and the file.
  - Press directly on the list in the status area.
  - Press the arrow keys to scroll the reverse video cursor.
  - Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	Register selection	1 and upwards
2	List R	File selection	1 and upwards

#### 4 Press [← Import].

This transfers the external file to the frame memory register.

## Exporting Frame Memory Data

As an example, to save image data from frame memory in a bitmap format on a memory card, use the following procedure.

- 1 In the Import/Export menu, press the device selection area on the left to select [Frame Memory (.BMP)].
- 2 Press the device selection area on the right to select [Memory Card]. It is not possible to select a directory.
- 3 Using any of the following methods, select the data you want to export from the list on the left.
  - Press directly on the list in the status area.
  - Press the arrow keys to scroll the reverse video cursor.
  - Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List L	Register selection	1 and upwards

#### 4 Press [→ Export].

This adds the image data from the frame memory in a bitmap format on the memory card.

If the specified destination file name already exists, an overwriting confirmation message appears.

- Select “Yes” to overwrite the data.
- Select “No” to cancel the whole file export operation.

---

# Directory Operations

You can create a new directory on hard disk or memory card, rename, or delete a directory.

To carry out these operations, use the File>Configure>Directory menu.

---

## Displaying the Directory Menu

In the File menu, select VF7 'Configure' and HF1 'Directory.'  
The Directory menu appears.

---

## Creating a New Directory

To create a new directory, use the following procedure.

- 1** In the device selection pull-down menu, select [HDD] or [Memory Card].  
(See page 428.)
- 2** Press [New].  
The keyboard window appears. (See "Menu Operations" in Chapter 2 (Volume 1).)
- 3** Enter a name of not more than eight characters, and press [Enter].  
A new directory with the name you have entered appears in the status area.

---

## Renaming a Directory

To rename a directory, use the following procedure.

- 1** In the device selection pull-down menu, select [HDD] or [Memory Card].  
(See page 428.)
- 2** Using any of the following methods, select the directory.
  - Press directly on the list in the status area.
  - Press the arrow keys to scroll the reverse video cursor.

- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List	Directory selection	1 and upwards

**3** Press [Rename].

The keyboard window appears. (See “Menu Operations” in Chapter 2 (Volume 1).)

**4** Enter a new name of not more than eight characters, and press [Enter].

The new name appears in the status area.

---

## Deleting a Directory

To delete a directory, use the following procedure.

**1** In the device selection pull-down menu, select [HDD] or [Memory Card]. (See page 428.)

**2** Using any of the following methods, select the directory.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List	Directory selection	1 and upwards

**3** Press [Delete].

A confirmation message appears.

- Select “Yes” to delete the directory.
- Select “No” to cancel the deletion.



# Copying Files Between Different Unit IDs

Switcher and DME files on the hard disk or a memory card are handled separately for each unit ID.

With the normal file copy operation, it is not possible to copy files between different unit IDs. To copy files between different unit IDs, use the following procedure.

*For details of unit IDs, see “Setup for the Whole System” (page 275) in Chapter 16.*

## Displaying the Unit ID Copy menu

In the File menu, select VF7 ‘Configure’ and HF2 ‘Unit ID Copy.’  
The Unit ID Copy menu appears.

## Copying files between different unit IDs

To copy files between different unit IDs, grouped by category, use the following procedure.

- 1** In the Unit ID Copy menu, press the category selection section at the top right of the screen.
- 2** Press the categories you do not want to select, turning them off.
- 3** Press [OK].
- 4** In the operating device selection section on the left list, select the storage location of the source files, and in the operating device selection section on the right list, specify the destination storage location (see “Selecting a Device for Operations” (page 428)).
- 5** Using either of the following methods, select the copy source and copy destination unit IDs.
  - Press directly on the list for the copy source on the left of the status area, and on the right for the copy destination.
  - Press the arrow keys to scroll the reverse video cursor.
  - Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	Selection of copy source unit ID	1 to 4
2	List R	Selection of copy desitination unit ID	1 to 4

## 6 Press [→Copy].

A confirmation message appears.

- Select “Yes” to carry out the copy to the specified destination of the selected file categories.
- Select ‘No’ to cancel the copy.

### **Note**

If there is already data present in the copy destination, note that this will overwrite all of the data.



# Saving Files Recalled by Autoload

If you save effect setting data, frame memory image files and so on in the PWON\_LD directory on the hard disk, then when the system is powered on this data is recalled automatically. This is known as the autoload function. To save the data to be recalled by the autoload function, use the menu for operations on individual files.

*For the data recalled by the autoload function, see “Files” in Chapter 1 (Volume 1).*

*For the setting enabling or disabling the autoload function, see “Setting automatic loading of register data at power on (autoload function)” (page 282).*

For example, to save snapshot data, use the following procedure.

- 1** In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’  
The Snapshot menu appears.
- 2** In the device selection area on the left, select [Register].
- 3** In the device selection area on the right, select [HDD].  
Be sure to select [HDD] as the saving destination.
- 4** Select the PWON\_LD directory.  
The PWON\_LD directory is automatically created when [Power On File Load] is set to On in the System>Start Up menu. If set to Off, the directory does not appear.
- 5** Using any of the following methods, select the data to be saved, and the file in which to save it.
  - To select all files within the list, press [ALL] below the list.
  - To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first register whose data is to be saved	1 to 99
2	List R	Select the first file to which data is to be saved	1 to 99
3	Num	Number of registers to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or directly press on the list in the status area.

## 6 Press [→Save].

The data from the selected registers is saved in the specified destination. If the specified destination already contains data, a confirmation message appears.

- Select “Yes” to overwrite the existing data.
- Select “No” to cancel the entire saving operation.

