

Model	LN32A550P3FX	
Feature		
▶ Digital-TV, RF, 3-HDMI, 2-Component, 2-AV(Just 1-AV is compare component jack), 1-S-Video, USB2.0, D-SUB ▶ Brightness : 500cd/m², Contrast Ratio : 30000:1 ▶ Response time : 8ms ▶ Dynamic contrast : S-PVA ▶ PIP(in HDMI 1, 2, 3, Component 1, 2, PC Mode and Sub picture is available only in TV analog mode)		
Specifications		
Item	Description	
LCD Panel	LTF320HA01,8bit,32inch,16.7M,16:9,0.3635(H) X 0.3635(V,0 to +50,12V,SPVA 72% ZBD,32 inch FHD	
Scanning Frequency	Horizontal : 67.5kHz Vertical : 48Hz~63Hz	
Display Colors	8 bit-16.7M	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	148.5MHz	
Active Display Horizontal/Vertical	27.5 x 15.5 inches (698.4(H) x 392.85(V) mm)	
AC power voltage & Frequency	AC 110V, 60 Hz	
Power Consumption	170W (standby : <1W)	
Dimensions Set (W x D x H)	34.1 x 8.7 x 22.1 inches(865.0 x 220.0 x 561.0 mm)_with stand 34.1 x 3.1 x 19.7 inches (865.0 x 79.0 x 499.8 mm)_without stand	
Weight	30.2 lbs with stand/ 26.0 lbs without stand	
TV System	Tunning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	NTSC-M
	Sound	MONO, STEREO, SAP
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Environmental Considerations	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2. Product specifications

Model	LN37A550P3FX	
Feature		
▶ Digital-TV, RF, 3-HDMI, 2-Component, 2-AV(Just 1-AV is compare component jack), 1-S-Video, USB2.0, D-SUB ▶ Brightness : 500cd/m² , Contrast Ratio : 30000:1 ▶ Response time : 8ms ▶ Dynamic contrast : S-PVA ▶ PIP(in HDMI 1, 2, 3, Component 1, 2, PC Mode and Sub picture is available only in TV analog mode)		
Specifications		
Item	Description	
LCD Panel	T370HW02 V4,8bit,37inch,16.7M,16:9,0.42675*0.42675,0 to +50,12V,AMVA,72%, 37 inch, AMVA, FHD	
Scanning Frequency	Horizontal : 65.4kHz~72kHz Vertical : 60Hz	
Display Colors	8bit-16.7M	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	148.5MHz	
Active Display Horizontal/Vertical	32.3 x 18.15 inches(819.36(H) x 460.89(V) mm)	
AC power voltage & Frequency	AC 110V, 60 Hz	
Power Consumption	190W (standby : <1W)	
Dimensions Set (W x D x H)	38.7 x 9.4 x 25.1 inches(984.0 x 240.0 x 637.0 mm)_with stand 38.7 x 3.4 x 22.5 inches (984.0 x 87.0 x 571.5 mm)_without stand	
Weight	39.7lbs with stand/33.5 lbs without stand	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	NTSC-M
	Sound	MONO, STEREO, SAP
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Environmental Considerations	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2-3

2-4

2-5

CHANNEL FREQUENCY TABLE

1. OUTPUT FREQUENCY : ANALOG fv:45.75MHz, fs:41.25MHz DIGITAL Fc:44MHz

2. TUNING STEP SIZE : FIRST PLL 250KHz SECOND PLL 62.5KHz

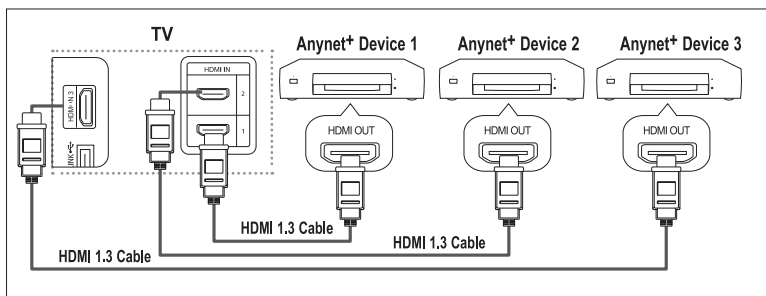
OSD	CH NO	AIR		BAND	CH NO	Cable STD		BAND	CH NO	Cable HRC		CH NO	Cable IRC	
		Air-DTV	Air-NTSC											
1	1								A-8	72.00		A-8	73.25	
2	2	57	55.25	V-L	2	55.25		V-L	2	54.00		2	55.25	
3	3	63	61.25	V-L	3	61.25		V-L	3	60.00		3	61.25	
4	4	69	67.25	V-L	4	67.25		V-L	4	66.00		4	67.25	
5	5	79	77.25	V-L	5	77.25		V-L	A-7	78.00		A-7	79.25	
6	6	85	83.25	V-L	6	83.25		V-L	A-6	84.00		A-6	85.25	
7	7	177	175.25	V-H	7	175.25		V-H	7	174.00		7	175.25	
8	8	183	181.25	V-H	8	181.25		V-H	8	180.00		8	181.25	
9	9	189	187.25	V-H	9	187.25		V-H	9	186.00		9	187.25	
10	10	195	193.25	V-H	10	193.25		V-H	10	192.00		10	193.25	
11	11	201	199.25	V-H	11	199.25		V-H	11	198.00		11	199.25	
12	12	207	205.25	V-H	12	205.25		V-H	12	204.00		12	205.25	
13	13	213	211.25	V-H	13	211.25		V-H	13	210.00		13	211.25	
14	14	473	471.25	UHF	A	121.25		MID	A	120.00		A	121.25	
15	15	479	477.25	UHF	B	127.25		MID	B	126.00		B	127.25	
16	16	485	483.25	UHF	C	133.25		MID	C	132.00		C	133.25	
17	17	491	489.25	UHF	D	139.25		MID	D	138.00		D	139.25	
18	18	497	495.25	UHF	E	145.25		MID	E	144.00		E	145.25	
19	19	503	501.25	UHF	F	151.25		MID	F	150.00		F	151.25	
20	20	509	507.25	UHF	G	157.25		MID	G	156.00		G	157.25	
21	21	515	513.25	UHF	H	163.25		MID	H	162.00		H	163.25	
22	22	521	519.25	UHF	I	169.25		MID	I	168.00		I	169.25	
23	23	527	525.25	UHF	J	175.25		SUPER	J	174.00		J	175.25	
24	24	533	531.25	UHF	K	181.25		SUPER	K	180.00		K	181.25	
25	25	539	537.25	UHF	L	187.25		SUPER	L	186.00		L	187.25	
26	26	545	543.25	UHF	M	193.25		SUPER	M	192.00		M	193.25	
27	27	551	549.25	UHF	N	199.25		SUPER	N	198.00		N	199.25	
28	28	557	555.25	UHF	O	205.25		SUPER	O	204.00		O	205.25	
29	29	563	561.25	UHF	P	211.25		SUPER	P	210.00		P	211.25	
30	30	569	567.25	UHF	Q	217.25		SUPER	Q	216.00		Q	217.25	
31	31	575	573.25	UHF	R	223.25		SUPER	R	222.00		R	223.25	
32	32	581	579.25	UHF	S	229.25		SUPER	S	228.00		S	229.25	
33	33	587	585.25	UHF	T	235.25		SUPER	T	234.00		T	235.25	
34	34	593	591.25	UHF	U	241.25		SUPER	U	240.00		U	241.25	
35	35	599	597.25	UHF	V	247.25		SUPER	V	246.00		V	247.25	
36	36	605	603.25	UHF	W	253.25		SUPER	W	252.00		W	253.25	
37	37	611	609.25	UHF	AA	259.25		HYPER	AA	258.00		AA	259.25	
38	38	617	615.25	UHF	BB	265.25		HYPER	BB	264.00		BB	265.25	
39	39	623	621.25	UHF	CC	271.25		HYPER	CC	270.00		CC	271.25	
40	40	629	627.25	UHF	DD	277.25		HYPER	DD	276.00		DD	277.25	
41	41	635	633.25	UHF	EE	283.25		HYPER	EE	282.00		EE	283.25	
42	42	641	639.25	UHF	FF	289.25		HYPER	FF	288.00		FF	289.25	
43	43	647	645.25	UHF	GG	295.25		HYPER	GG	294.00		GG	295.25	
44	44	653	651.25	UHF	HH	301.25		HYPER	HH	300.00		HH	301.25	
45	45	659	657.25	UHF	II	307.25		HYPER	II	306.00		II	307.25	
46	46	665	663.25	UHF	JJ	313.25		HYPER	JJ	312.00		JJ	313.25	
47	47	671	669.25	UHF	KK	319.25		HYPER	KK	318.00		KK	319.25	
48	48	677	675.25	UHF	LL	325.25		HYPER	LL	324.00		LL	325.25	
49	49	683	681.25	UHF	MM	331.25		HYPER	MM	330.00		MM	331.25	
50	50	689	687.25	UHF	NN	337.25		HYPER	NN	336.00		NN	337.25	
51	51	695	693.25	UHF	OO	343.25		HYPER	OO	342.00		OO	343.25	
52	52	701	699.25	UHF	PP	349.25		HYPER	PP	348.00		PP	349.25	
53	53	707	705.25	UHF	QQ	355.25		HYPER	QQ	354.00		QQ	355.25	
54	54	713	711.25	UHF	RR	361.25		HYPER	RR	360.00		RR	361.25	
55	55	719	717.25	UHF	SS	367.25		HYPER	SS	366.00		SS	367.25	
56	56	725	723.25	UHF	TT	373.25		HYPER	TT	372.00		TT	723.25	
57	57	731	729.25	UHF	UU	379.25		HYPER	UU	378.00		UU	729.25	
58	58	737	735.25	UHF	VV	385.25		HYPER	VV	384.00		VV	735.25	
59	59	743	741.25	UHF	WW	391.25		HYPER	WW	390.00		WW	741.25	
60	60	749	747.25	UHF	XX	397.25		HYPER	XX	396.00		XX	747.25	
61	61	755	753.25	UHF	YY	403.25		HYPER	YY	402.00		YY	753.25	
62	62	761	759.25	UHF	ZZ	409.25		HYPER	ZZ	408.00		ZZ	759.25	
63	63	767	765.25	UHF	AAA	415.25		HYPER	AAA	414.00		AAA	765.25	
64	64	773	771.25	UHF	BBB	421.25		HYPER	BBB	420.00		BBB	771.25	
65	65	779	777.25	UHF	CCC	427.25		ULTRA	CCC	426.00		CCC	777.25	
66	66	785	783.25	UHF	DDD	433.25		ULTRA	DDD	432.00		DDD	783.25	
67	67	791	789.25	UHF	EEE	439.25		ULTRA	EEE	438.00		EEE	789.25	
68	68	797	795.25	UHF	FFF	445.25		ULTRA	FFF	444.00		FFF	795.25	
69	69	803	801.25	UHF	GGG	451.25		ULTRA	GGG	450.00		GGG	801.25	

OSD	CH NO	AIR		BAND	CH NO	Cable STD	BAND	CH NO	Cable HRC	CH NO	Cable IRC
		Air-DTV	Air-NTSC								
70	70				HHH	499.25	ULTRA	HHH	498.00	HHH	499.25
71	71				III	505.25	ULTRA	III	504.00	III	505.25
72	72				JJJ	511.25	ULTRA	JJJ	510.00	JJJ	511.25
73	73				KKK	517.25	ULTRA	KKK	516.00	KKK	517.25
74	74				LLL	523.25	ULTRA	LLL	522.00	LLL	523.25
75	75				MMM	529.25	ULTRA	MMM	528.00	MMM	529.25
76	76				NNN	535.25	ULTRA	NNN	534.00	NNN	535.25
77	77				000	541.25	ULTRA	000	540.00	000	541.25
78	78				PPP	547.25	ULTRA	PPP	546.00	PPP	547.25
79	79				79	553.25	ULTRA	79	552.00	79	553.25
80	80				80	559.25	ULTRA	80	558.00	80	559.25
81	81				81	565.25	ULTRA	81	564.00	81	565.25
82	82				82	571.25	ULTRA	82	570.00	82	571.25
83	83				83	577.25	ULTRA	83	576.00	83	577.25
84	84				84	583.25	ULTRA	84	582.00	84	583.25
85	85				85	589.25	ULTRA	85	588.00	85	589.25
86	86				86	595.25	ULTRA	86	594.00	86	595.25
87	87				87	601.25	ULTRA	87	600.00	87	601.25
88	88				88	607.25	ULTRA	88	606.00	88	607.25
89	89				89	613.25	ULTRA	89	612.00	89	613.25
90	90				90	619.25	ULTRA	90	618.00	90	619.25
91	91				91	625.25	ULTRA	91	624.00	91	625.25
92	92				92	631.25	ULTRA	92	630.00	92	631.25
93	93				93	637.25	ULTRA	93	636.00	93	637.25
94	94				94	643.25	ULTRA	94	642.00	94	643.25
95	95				A-5	91.25	FM	A-5	90.00	A-5	91.25
96	96				A-4	97.25	FM	A-4	96.00	A-4	97.25
97	97				A-3	103.25	FM	A-3	102.00	A-3	103.25
98	98				A-2	109.25	MID	A-2	108.00	A-2	109.25
99	99				A-1	115.25	MID	A-1	114.00	A-1	115.25
100	100				100	649.25	ULTRA	100	648.00	100	649.25
101	101				101	655.25	ULTRA	101	654.00	101	655.25
102	102				102	661.25	ULTRA	102	660.00	102	661.25
103	103				103	667.25	ULTRA	103	666.00	103	667.25
104	104				104	673.25	ULTRA	104	672.00	104	673.25
105	105				105	679.25	ULTRA	105	678.00	105	679.25
106	106				106	685.25	ULTRA	106	684.00	106	685.25
107	107				107	691.25	ULTRA	107	690.00	107	691.25
108	108				108	697.25	ULTRA	108	696.00	108	697.25
109	109				109	703.25	ULTRA	109	702.00	109	703.25
110	110				110	709.25	ULTRA	110	708.00	110	709.25
111	111				111	715.25	ULTRA	111	714.00	111	715.25
112	112				112	721.25	ULTRA	112	720.00	112	721.25
113	113				113	727.25	ULTRA	113	726.00	113	727.25
114	114				114	733.25	ULTRA	114	732.00	114	733.25
115	115				115	739.25	ULTRA	115	738.00	115	739.25
116	116				116	745.25	ULTRA	116	744.00	116	745.25
.	.				.	.	.	.	.	.	.
.	.				.	.	.	.	.	.	.
125	125				125	799.25	ULTRA	125	798.00	125	799.25
.	.				.	.	.	.	.	.	.
.	.				.	.	.	.	.	.	.

2-2. New Features explanation


- ▶ **Anynet+:** Anynet+ is an AV network system that enables you to control all connected Samsung AV devices with the TV's remote.

To directly connect to TV



Connect the [HDMI 1], [HDMI 2] or [HDMI 3] jack on the TV and the HDMI OUT jack of the corresponding Anynet+ device using the HDMI cable.

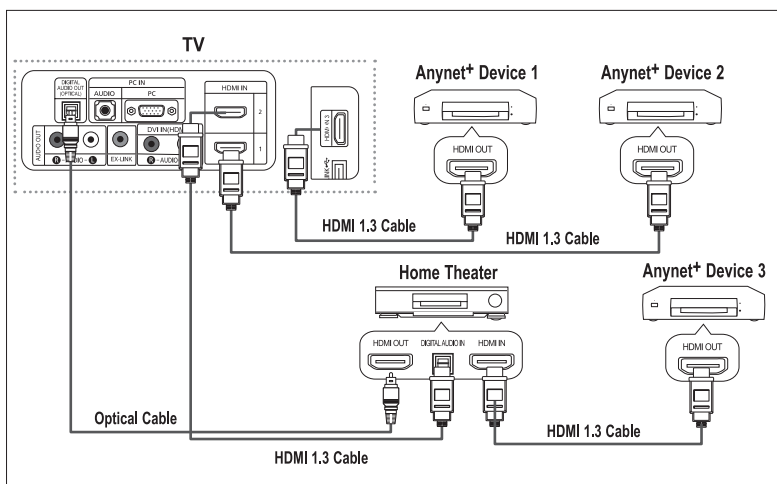To connect to Home Theater



1. Connect the [HDMI 1], [HDMI 2] or [HDMI 3] jack on the TV and the HDMI OUT jack of the corresponding Anynet+ device using the HDMI cable.






2. Connect the HDMI IN jack of the home theater and the HDMI OUT jack of the corresponding Anynet+ device using the HDMI cable.

- Connect the Optical cable between [Digital Audio Out (Optical)] on your TV and Digital Audio Input on the Home Theater.
- Connect only one Home Theater.
- You can listen to 5.1 channel sound through the home theater's speakers. Otherwise, you can only listen to 2 channel stereo sound in other cases. Make sure to connect the Digital Audio IN (Optical) of the home theater and the TV correctly to listen to TV sound through the home theater. However, you cannot listen to sound from the BD recorder that is sent to the home theater via the TV in 5.1 channel sound because the TV outputs only 2 channel stereo sound. Please see the manual for the home theater.
- You can connect an Anynet+ device using the HDMI 1.3 cable. Some HDMI cables may not support Anynet+ functions.
- Anynet+ works when the AV device supporting Anynet+ is in the Standby or On status.
- Anynet+ supports up to 12 AV devices in total.

2-3. Spec Comparison to the Old Models

Model	Pearl (LN46A550P3FX)	Mosel-3 (LNT466F)
Design		
Display Type	LCD TV	LCD TV
Built-in Tuner	O	O
Resolution	1920 x 1080	1920 x 1080
LCD Panel	TFT LCD 46" Panel	TFT LCD 46" Panel
Screen Size	32"/37"/40"/46"/52"	46"
Picture ratio	16 : 9	16 : 9
Dimensions (W x H x D)	46 44.4 x 11.0 x 30.2 inches_with stand 44.4 x 3.9 x 27.6 inches_without stand	44.4 x 12.8 x 31.0 inches (With Stand) 44.4 x 4.2 x 28.8 inches (Without Stand)
Weight	46 60.8 lbs_with stand	78.2 lbs (set) 97.0 lbs (package)
Brightness	500 nit	550 nit
Contrast Ratio	30000:1	10,000:1
Picture Enhancer	DNle (FBE3)	DNle (FBE2)
Equalizer	5 Band	5 Band
Auto Volume Control	O	O
Surround Sound	SRS TruSurround Dolby Digital	SRS TruSurround Dolby Digital
Speaker Output	10W + 10W	10W + 10W
PIP	O	O
Double Window	O	O
Caption	O	O
Still Image	O	O
EPG	O	X
My Color Control	O	O
Color Weakness	X	O
Energy Saving	O	O
Anynet	O	O
Antenna	1(Cable/Air)	2(Cable/Air)

2-4. Accessories

Product	Description	Code. No	Remark
	Remote Control & Batteries (AAA x 2)	BN59-00673A	Samsung Electronics Service center
	Power Cord	3903-000144	
	Cover-Bottom	32": BN63-04207B 37": BN63-04437B 40": BN63-04437B 46": BN63-04374B 52": BN63-04374B	
	Stand	32": BN96-06935A 37": BN96-04754A 40": BN96-04754A 46": BN96-06936A 52": BN96-06937A	
	Screw	6002-001294	
	Owner's Instructions	BN68-01392D	
	Cleaning Cloth	BN63-01798A	
	Warranty Card / Registration Card / Safety Guide Manual (Not available in all locations)	AA68-00371C	