



Broadcast Products Technical Bulletin 20-2010-086

DATE: June 21, 2010

SUBJECT: PARTS REGISTRATION—LENS MOUNTING
PARTS

MODEL: HDC-900
HDC-900/1
HDC-900/2
HDC-900/3
HDC-900/3
HDC-900/3T
HDC-900/4
HDC-900/4
HDC-900/4T
HDC-910
HDC-910
HDC-910/1
HDC-910/1
HDC-910/1T
HDC-910/T
HDC-930
HDC-930/1
HDC-930/1T
HDC-930/T
HDC-950
HDC-950/1
HDC-950/2
HDC-950/2T
HDC-950/3
HDC-950/3T
HDC-F950
HDC1000//ULW
HDC1000/LB
HDC1000/LB
HDC1000/LW
HDC1000/LW
HDC1000/LW1
HDC1000/LW2
HDC1000R/LB
HDC1000R/LB
HDC1000R/LB1
HDC1000R/LB1
HDC1000R/LW
HDC1000R/LW
HDC1000R/LW1
HDC1000R/LW1

DESCRIPTION

The following parts related to the lens mounting mechanism are available as service parts. (See Figure 1.)

Description	Part No.
Sleeve back mount	9-885-145-06
Guide plate	3-776-897-02
Bolt (M2×15), hexagon socket	2-621-755-21

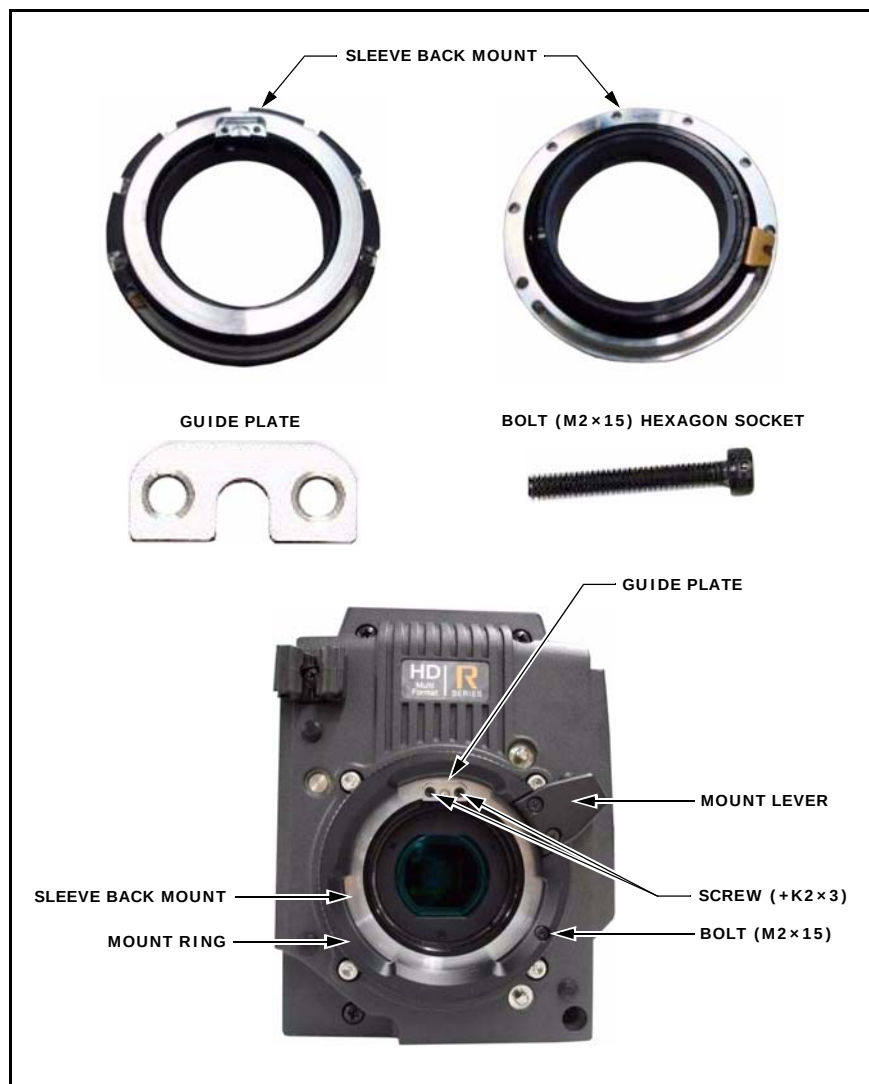


Figure 1

HDCM10-010

HDC1400//UL
HDC1400/L
HDC1400/T
HDC1400/T
HDC1400R//UL
HDC1400R/L
HDC1400R/L1
HDC1400R/T
HDC1400R/T
HDC1400R/T1
HDC1400R/T1
HDC1400R=UL1
HDC1450//UF
HDC1450/K
HDC1450R//UF
HDC1450R/K
HDC1450R/K1
HDC1450R=UF1
HDC1500//UL
HDC1500/L
HDC1500/L
HDC1500/L1
HDC1500/L2
HDC1500/T
HDC1500/T2
HDC1500R//UL
HDC1500R/L
HDC1500R/L1
HDC1500R/T
HDC1500R/T
HDC1500R/T1
HDC1500R/T1
HDC1500R=UL1
HDC1550//UF
HDC1550//UF1
HDC1550/F
HDC1550/K
HDC1550/K1
HDC1550/K2
HDC1550R//UF
HDC1550R/K
HDC1550R/K1
HDC1550R=UF1
HDC1580/L
HDC1580/L1
HDC1580/T
HDC1580R/L
HDC1580R/L1
HDC1580R/T
HDC1580R/T1
HDC3300/L
HDC3300/L
HDC3300/T
HDC3300/T

ORDERING INFORMATION

To order parts online, go to: www.sony.com/servicesplus. For service or parts ordering assistance, refer to the following document, which lists all contact telephone numbers:

Technical Bulletin 00-1999-000

REPLACEMENT PROCEDURE

Sleeve Back Mount

1. Install the new guide plate to the new sleeve back mount with two +K2×3 screws (7-627-452-18).
2. Remove the bolt. (See Figure 2.)



Figure 2

3. Turn the mount ring counterclockwise, and detach the mount ring. (See Figure 3.)

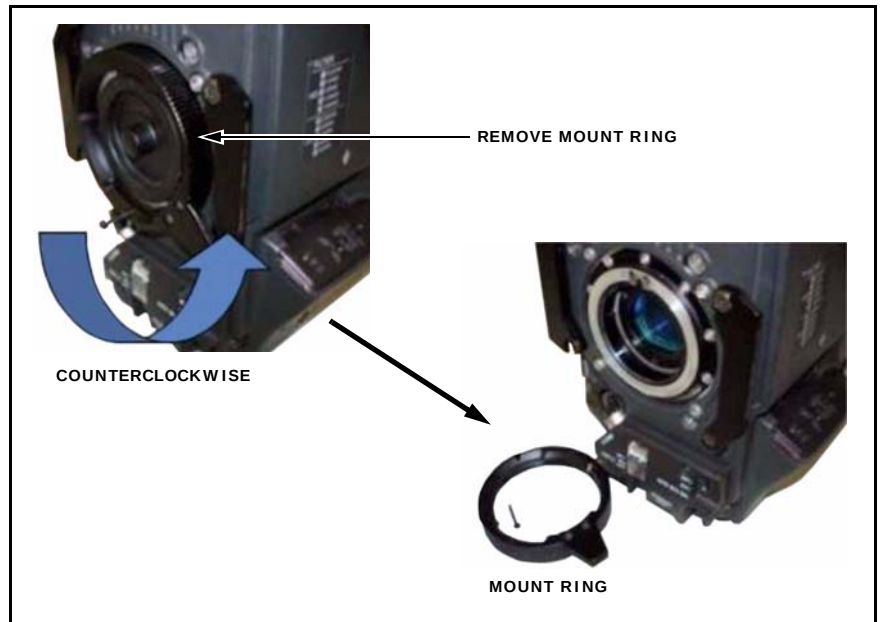


Figure 3

HDC3300R/L
HDC3300R/L
HDC3300R/L1
HDC3300R/L1
HDC3300R/T
HDC3300R/T
HDC3300R/T1
HDC3300R/T1

SERIAL NO: ALL

Italicized information in green applies to customers outside the United States.

4. Remove the seven bolts, and remove the former sleeve back mount. (See Figure 4.)

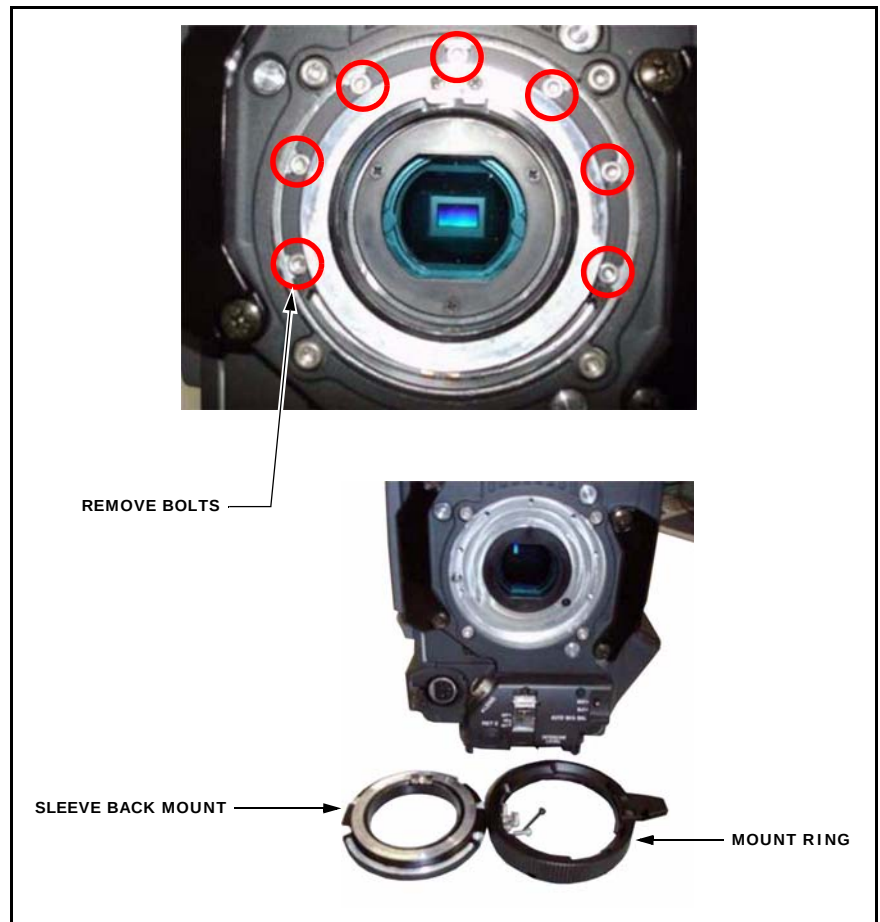


Figure 4

5. Affix the new sleeve back mount with the seven bolts. (See Figure 5.)

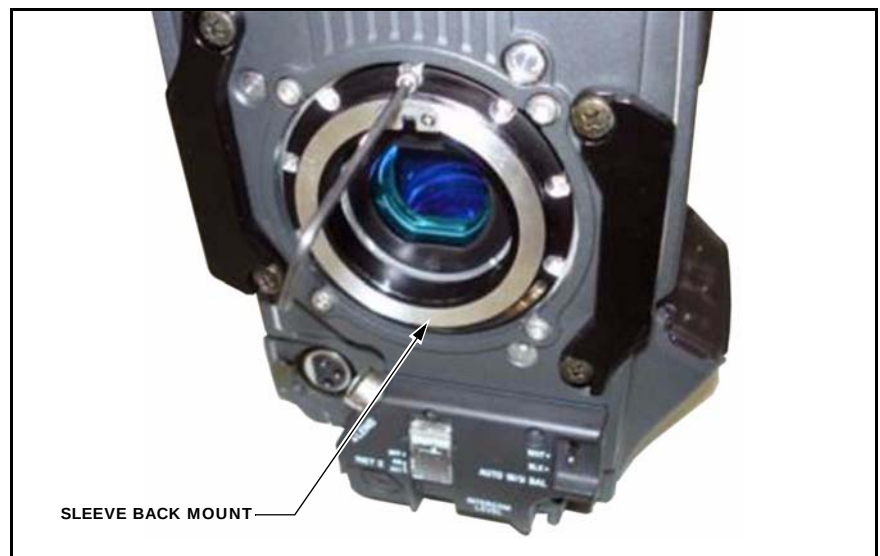


Figure 5

6. Turn the L-shaped lever counterclockwise as far as it will go.
(See Figure 6.)

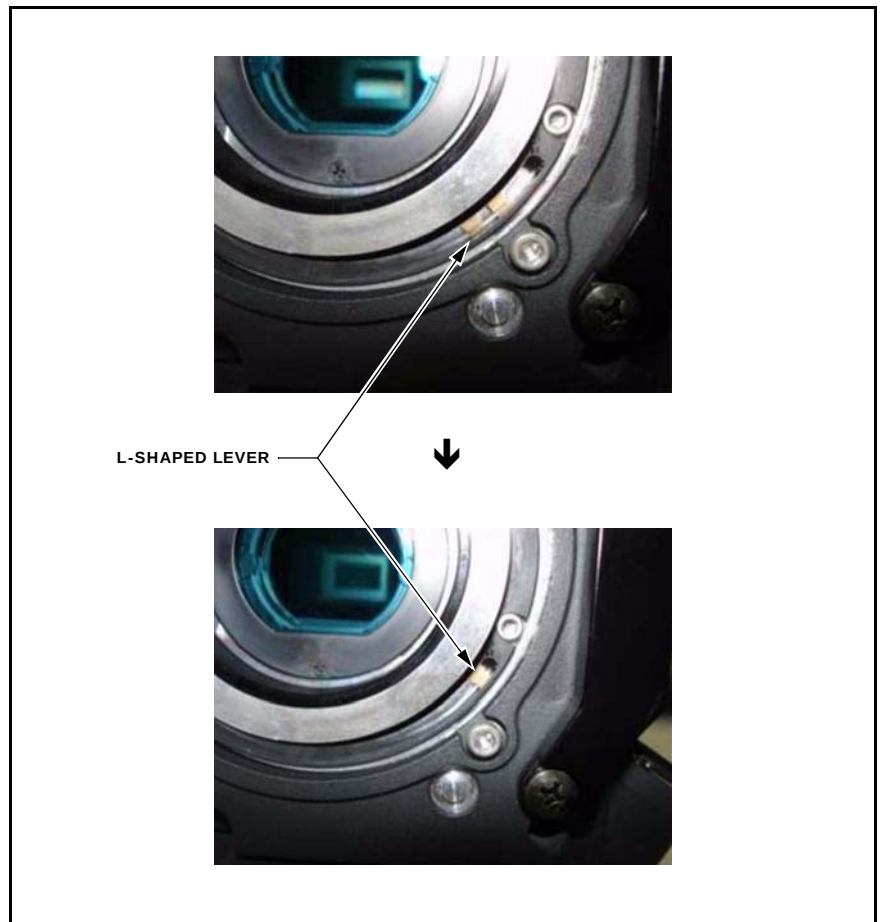


Figure 6

7. Install the mount cap. (See Figure 7.)



Figure 7

8. Install the mount ring, turning it clockwise as far as it will go, and install the black M2×15 bolt half-way in. (See Figure 8.)

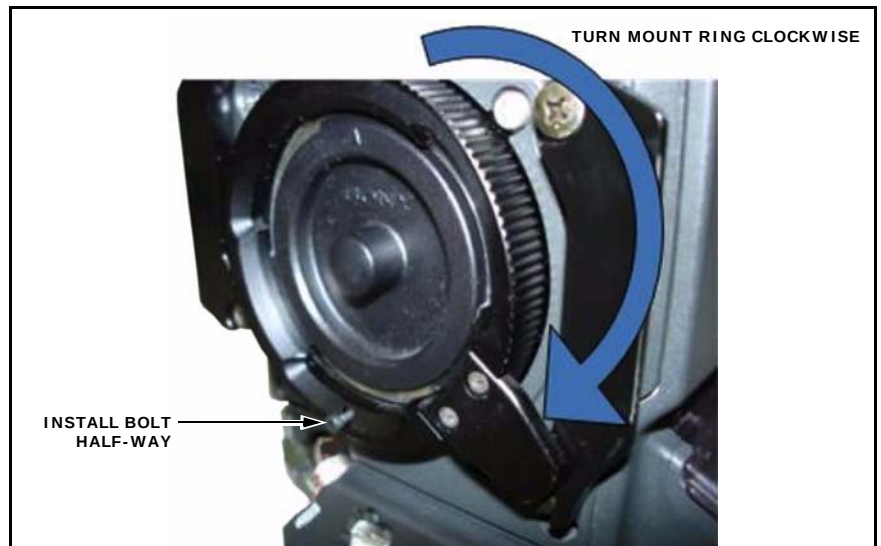


Figure 8

9. Turn the mount ring counterclockwise as far as it will go. (See Figure 9.)

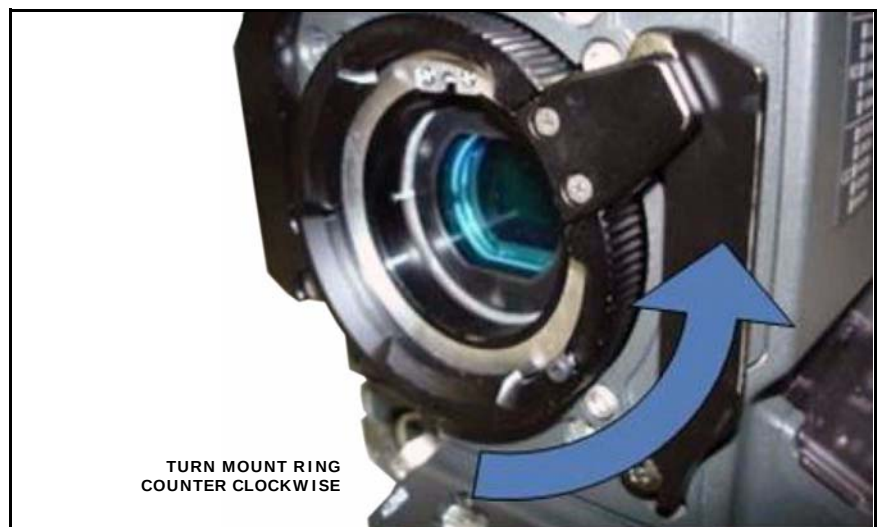


Figure 9

10. Tighten the black bolt completely without interfering with the L-shaped lever. (See Figure 10.)

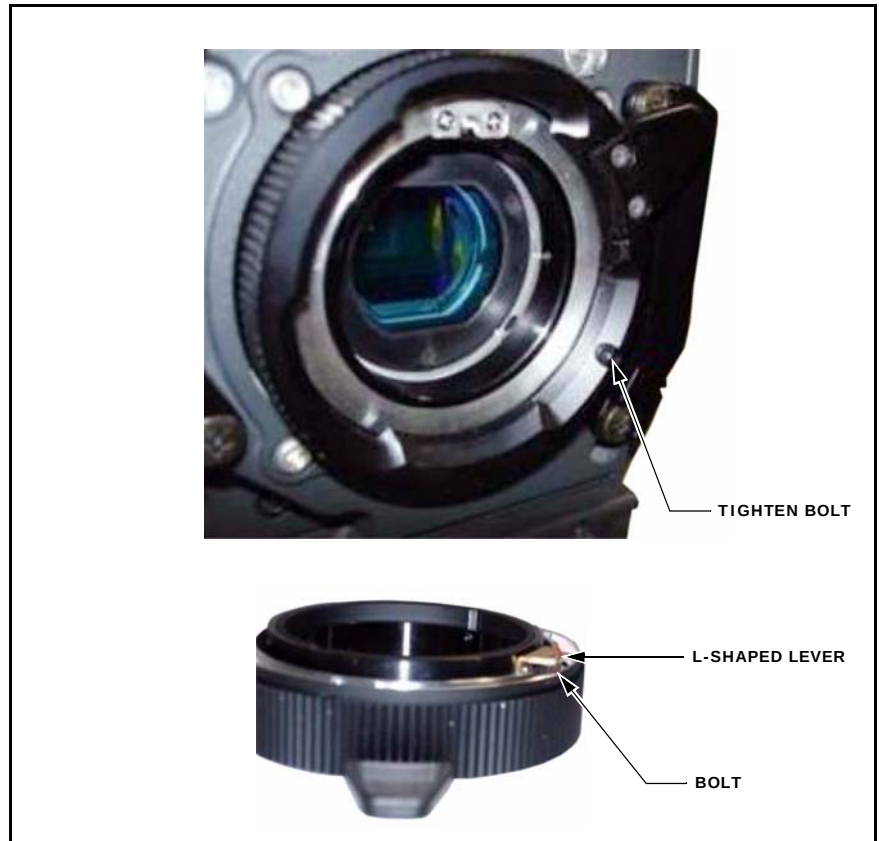


Figure 10

11. Turn the mount ring clockwise as far as it will go, and confirm that the sleeve moves back. (See Figure 11.)

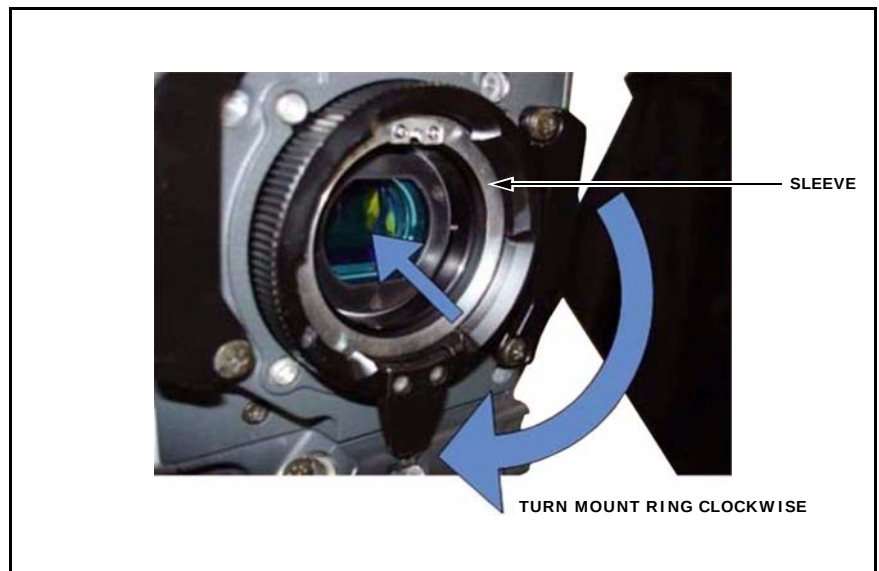


Figure 11