SONY

HD DIGITAL VIDEO SWITCHER

HDS-7000

POWER SUPPLY UNIT

HKDS-7690A

SWITCHER CONTROL PANEL

BKDS-7011/7012/7025/7026

HKDS-7031

HKDS-7041

HZS-7010

HZS-7020

BKDS-7001

BKDS-7030

BKDS-7031

BKDS-7033

BKDS-7075

BKDS-7090

MAINTENANCE MANUAL Part 2

Volume 1 1st Edition (Revised 2)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

設置や保守，点検，修理などを行う前に，別冊のメンテナンスマニュアルPart 1の「安全のために」と別冊のオペレーションマニュアルの「安全のために」を必ずお読みください。

⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

HDS-7000	Serial No. 10001 and Higher
HKDS-7690A	Serial No. 10001 and Higher
BKDS-7011	Serial No. 10001 and Higher
BKDS-7012	Serial No. 10001 and Higher
BKDS-7025	Serial No. 10001 and Higher
BKDS-7026	Serial No. 10001 and Higher
HKDS-7031	Serial No. 10001 and Higher
HKDS-7041	Serial No. 10001 and Higher
HZS-7010	Software Version 1.00 and Later
HZS-7020	Software Version 1.00 and Later
BKDS-7001	Serial No. 10001 and Higher
BKDS-7030	Serial No. 10001 and Higher
BKDS-7031	Serial No. 10001 and Higher
BKDS-7033	Serial No. 10001 and Higher
BKDS-7075	Serial No. 10001 and Higher
BKDS-7090	Serial No. 10001 and Higher

Table of Contents

Manual Structure

Purpose of this manual 5
Related manuals 5
Contents 6

1. Service Overview

1-1. Use of Extension Boards 1-1
1-2. Replacement of Connectors 1-4
1-2-1. Replacement of D-SUB Connectors 1-4
1-2-2. Replacement of BNC Connectors on CN-1439 Board 1-6
1-2-3. Replacement of Input/Output Coaxial Cable 1-8
1-2-4. Replacement of Coaxial Cable on DI-21/DI-37 and OUT-7/OUT-20 Boards 1-12
1-3. HKDS-7690A Power Supply Block Replacement 1-13
1-3-1. Error Indications 1-13
1-3-2. Removal of Cabinet 1-15
1-3-3. Replacement of EC-55 Board 1-19
1-3-4. Replacement of Fans 1-20
1-3-5. Replacement of Power Module 1-22
1-3-6. Replacement of Fuses 1-28
1-4. BKDS-70xx (Control Panel) Power Supply Block Replacement 1-29
1-4-1. Removal of Power Unit 1-29
1-4-2. Replacement of Fans 1-30
1-4-3. Replacement of Power Modules 1-32
1-4-4. Replacement of Fuses 1-34

2. Semiconductor Pin Assignments

3. Spare Parts

3-1. Notes on Repair Parts 3-1
3-2. Exploded Views 3-2
3-3. Electrical Parts List 3-16

4. Location of Mounted Circuit Boards

4-1. HDS-7000 4-1
4-2. HKDS-7690A 4-6

5. Block Diagrams

5-1. Overall Block Diagrams 5-2
5-1-1. HDS-7000 5-2
5-1-2. BKDS-7011/7012 5-3
5-1-3. BKDS-7025/7026 5-6
5-1-4. HKDS-7690A 5-9
5-2. PC Board Block Diagrams/HDS-7000 5-10
5-2-1. CKG-10, IF-656 5-10
5-2-2. CKG-29, IF-656 (For 24P System) 5-11
5-2-3. CPU-183 5-12
5-2-4. DI-21/DI-37 5-14
5-2-5. KPC-3/KPC-15 5-16
5-2-6. MEM-87 5-17
5-2-7. MEM-92 5-18
5-2-8. MIX-13 5-19
5-2-9. OUT-7/OUT-20 5-24
5-2-10. DU-79, OUT-20 (For 24P System) 5-27
5-2-11. VSW-33 5-30
5-2-12. WKG-25/WKG-29 5-32
5-2-13. WKG-26 5-33
5-3. PC Board Block Diagrams/HKDS-7690A 5-34
5-3-1. RE-194 5-34
5-3-2. RE-196 5-34
5-4. PC Board Block Diagram/HKDS-7031 5-35
5-4-1. CRK-9 5-35
5-5. PC Board Block Diagram/HKDS-7041 5-36
5-5-1. MY-65 5-36

6. Board Layouts

CKG-10 6-2
CKG-29 6-4
CN-1439 6-6
CN-1539 6-9
CN-1700 6-9
CN-1701 6-9
DU-79 6-9
CPU-183 6-10
CRK-9 6-12
DI-21 6-14
DI-37 6-16
IF-656 6-19
KPC-3 6-20
KPC-15 6-22
MB-494 6-24
MEM-87 6-27
MEM-92 6-27
MIX-13 6-28
MY-65 6-30
OUT-7 6-32
OUT-20 6-34
VSW-33 6-36
WKG-25 6-38
WKG-26 6-41
WKG-29 6-42

このマニュアルについて
Manual Structure

本書の目的

本書は，HDデジタルビデオスイッチャHDS-7000のメンテナンスマニュアル パート2 Volume 1です。

メンテナンスマニュアル パート2は，サービスエンジニアの方々にご使用いただくことを想定し，本システムの部品レベルまでのサービスを前提とした情報 (部品交換要項，半導体リスト，補修用部品，ブロック図，マウント図，回路図等) を記載しています。

本書 (Volume 1) では，回路図以外の情報を記載しています。

関連マニュアル

本システムには，この「メンテナンスマニュアル パート2」のほかに，下記のマニュアルが用意されています。

- ユーザーズガイド (HZS-7010 に付属)
  本システムを実際に運用および操作するのに必要なマニュアルです。
  部品番号 : 3-862-187-XX

- オペレーションマニュアル (本機に付属)
  本システムの概要，システム構成例，仕様について記載したマニュアルです。
  部品番号 : 3-862-468-XX

- インストレーションマニュアル (本機に付属)
  本システムの納入設置時に必要な情報を記載したマニュアルです。
  部品番号 : 3-194-862-XX

- メンテナンスマニュアル パート1 (本機に付属)
  本システムの保守に関する情報，主なブロックおよび基板交換によるサービスを前提とした情報を記載したマニュアルです。
  部品番号 : 3-194-861-XX

- “Semiconductor Pin Assignments” CD-ROM版 (別途用意)
  この “Semiconductor Pin Assignments” CD-ROM版は，B&Pカンパニーの機器に使用されている半導体を検索することができます。
  このCD-ROMで検索できない半導体は，その半導体が使用されている機種のメンテナンスマニュアルに記載されています。メンテナンスマニュアルには，その機種に使用されているすべての半導体一覧とそのID番号を記載していますので，このCD-ROM版と合わせて使用してください。
  部品番号 : 9-968-546-XX

Purpose of this manual

This manual is the maintenance manual part 2 volume 1 of HD digital video switcher HDS-7000.

The maintenance manual part 2 is intended for use by trained service engineers, and describes the information for detailed service information including parts replacement, semiconductor pin assignments, spare parts list, block diagrams, board layouts, and schematic diagrams.

This manual (volume 1) describes the information except for schematic diagrams.

Related manuals

Besides this Maintenance Manual Part 2, the following manuals are available for HDS-7000 system.

- **User's Guide (Supplied with HZS-7020)**
  This manual describes the application and operation of HDS-7000.

- **Operation Manual (Supplied with HDS-7000)**
  This manual describes the overview, system configuration examples and specifications.
  Part number : 3-862-468-XX

- **Installation Manual (Supplied with HDS-7000)**
  This manual describes the information when installing HDS-7000.
  Part number : 3-194-862-XX

- **Maintenance Manual Part 1 (Supplied with HDS-7000)**
  This manuals describe the information for the periodic maintenance, and the information for the service with predicated on the replacement of the principal blocks and mounted circuit boards.
  Part number : 3-194-861-XX

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in B&P Company equipment.
  Semiconductors that cannot be searched for on this CD-ROM are listed in the maintenance manual for the corresponding unit. The maintenance manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number : 9-968-546-XX

構成

メンテナンスマニュアルパート2の構成を把握していただくために，全章の概略を以下に説明します。

メンテナンスマニュアル パート2 Volume 1
(本書)
第1章　サービスインフォメーション
延長基板の使用方法，コネクタ，電源部の交換を記載しています。

第2章　Semiconductor Pin Assignments
本機で使用している半導体の型名一覧とその半導体標準図検索用ID番号を記載しています。
別売の "Semiconductor Pin Assignments" CD-ROM版と合わせてご覧ください。
また，本書作成時に，CD-ROM版に含まれていない半導体標準図がある場合は，本章に追加掲載しています。

第3章　Spare Parts
補修用部品を記載しています。

第4章　Location of Mounted Circuit Boards
基板配置図を記載しています。

第5章　Block Diagrams
オーバーオールブロック図と基板のブロック図をアルファベット順で記載しています。

第6章　Board Layouts
基板のマウント図をアルファベット順で記載しています。

メンテナンスマニュアル パート2 Volume 2
Schematic Diagrams
基板回路図をアルファベット順で記載しています。

Contents

The maintenance manual part 2 is organized by following sections.

Maintenance Manual Part 2 Volume 1
(This manual)
Section 1　Service Overview
This section describes the use of extension board, and replacement of connectors and power supply block.

Section 2　Semiconductor Pin Assignments
Contains information on semiconductors used for the unit. It includes a complete list of the semiconductors and their ID Nos. for retrieving information on "Semiconductor Pin Assignments" CD-ROM, which is available separately.
Please refer to this section together with the "Semiconductor Pin Assignments" CD-ROM.
Information on the semiconductors not contained in the CD-ROM at the time of issue of this manual, if any, is given in this section as well.

Section 3　Spare Parts
This section describes detailed spare parts list.

Section 4　Location of Mounted Circuit Boards
This section describes the location of mounted circuit boards.

Section 5　Block Diagrams
This section describes the overall block diagrams and block diagrams in the alphabetical order.

Section 6　Board Layouts
This section describes the board layouts of mounted circuit boards in the alphabetical order.

Maintenance Manual Part 2 Volume 2
Schematic Diagrams
This section describes the schematic diagrams of the mounted circuit boards in the alphabetical order.

第1章　サービスインフォメーション
Section 1　Service Overview

1-1. 延長基板の使用方法

Slot 1 ～ 13 用
EX-700 延長基板
ソニー部品番号 ：A-8320-623-A

Slot 14 ～ 16 用
EX-638 延長基板
ソニー部品番号 ：A-8320-622-A

注意

延長基板は必ず指定されたスロットに挿入してください。指定されたスロット以外で使用すると,基板が壊れる原因となります。

1. 本機から動作確認を行う基板を引き出す。
(Maintenance Manual Part1 1-1-3 項 参照)
2. 図のようにイジェクトレバーを開いた状態で,延長基板を基板ガイドレールに差し込む。
3. イジェクトレバーを矢印方向に閉じながら,延長基板を押し込む。

1-1. Use of Extension Boards


For slots 1 through 13
Extension board, EX-700
Sony part No. : A-8320-623-A

For slots 14 through 16
Extension board, EX-638
Sony part No. : A-8320-622-A

Note


To avoid damage to the mounted circuit boards, be sure to insert the extension boards to the specified slots.

1. Pull out the board to check the operation from the unit.
(Refer to Section 1-1-3 in the maintenance manual part 1.)
2. Insert the extension board along the board guide rails while putting the eject levers to “Pull out” position as shown in the figure.
3. Connect the extension board to the connectors on the mother board by putting the eject levers to “Insert” position as shown in the figure.

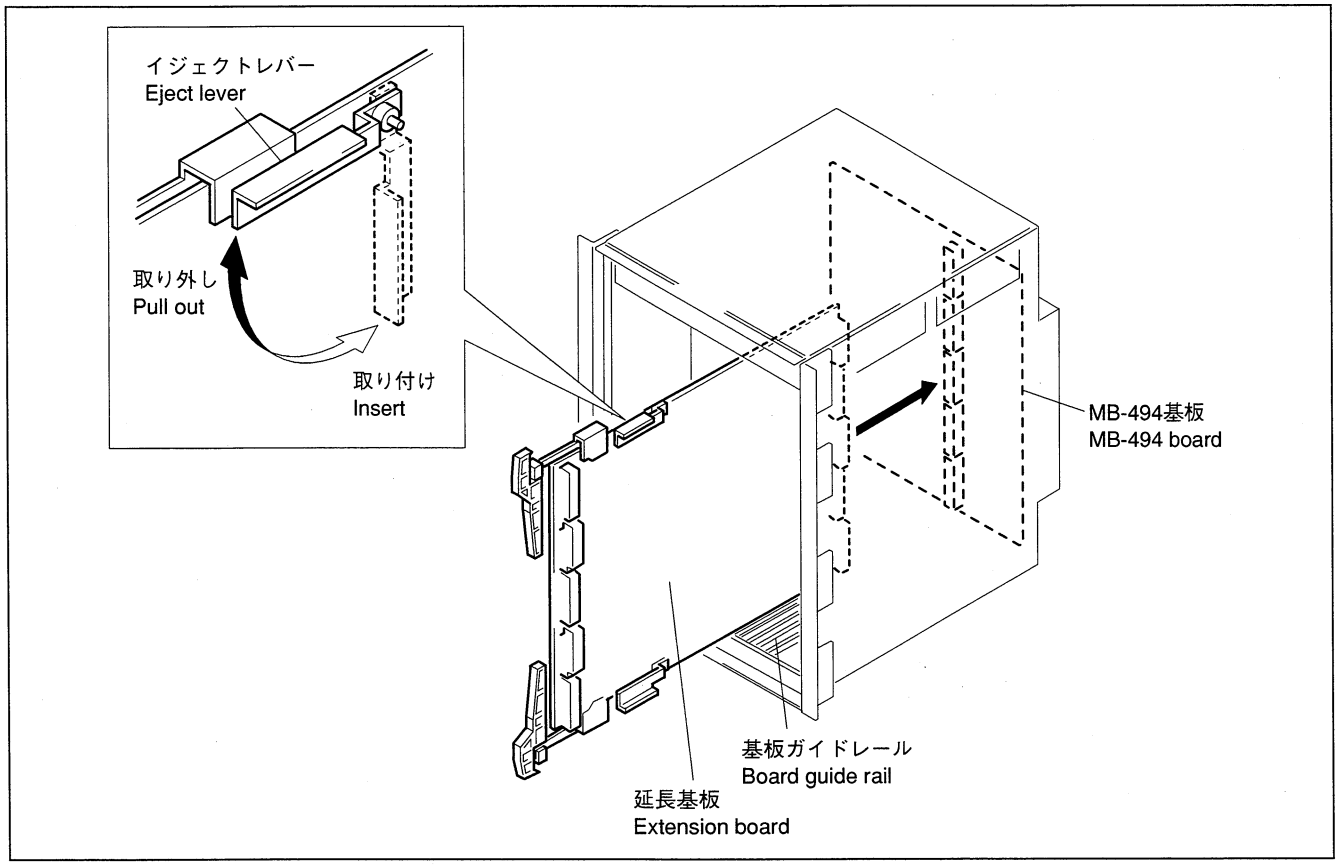


4. 矢印方向に延長基板のレールを開く。
5. 基板を延長基板のレールに差し込む。

4. Pull the rails of the extension board in the direction of the arrow.
5. Insert the board to check along the rails of the extension board.

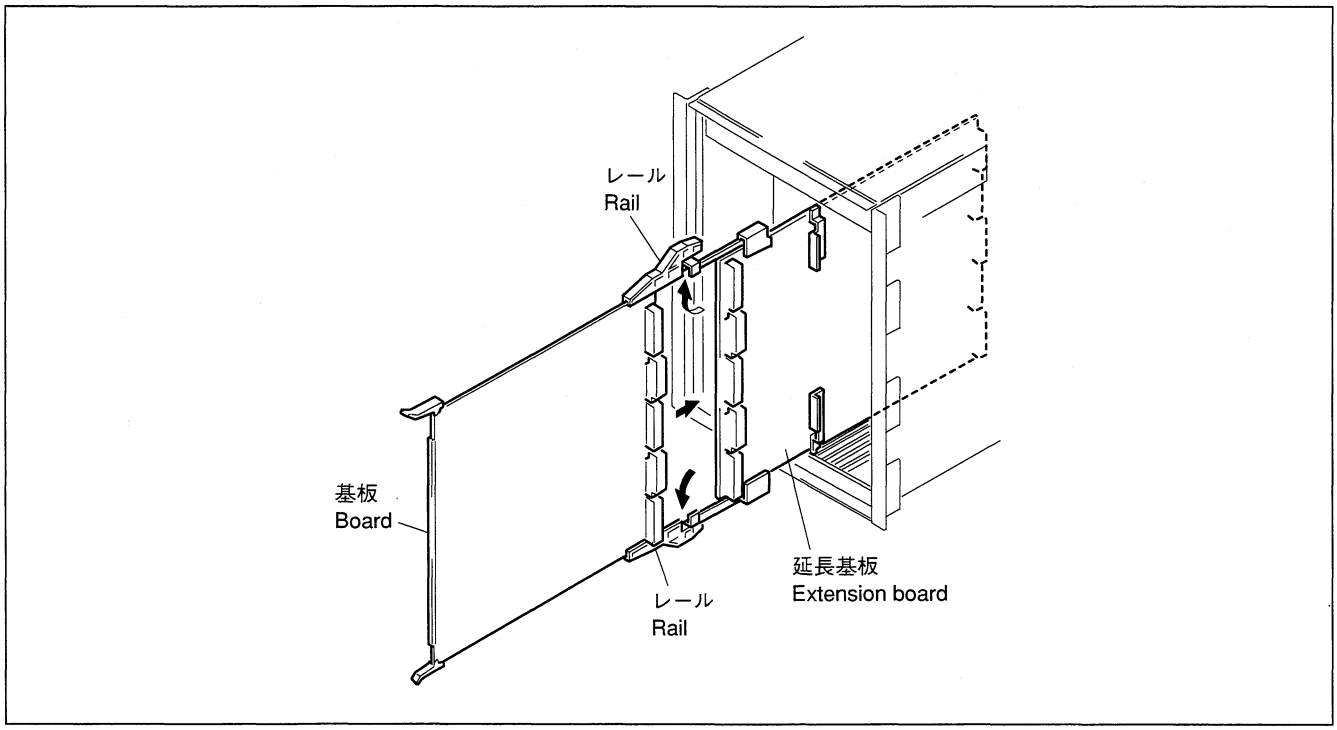


6. 基板の動作確認を行う。
7. 確認後，基板を延長基板のレールから引き抜く。

6. Check the operation of the board.
7. After the check is completed, pull out the checked board from the rails of the extension board.

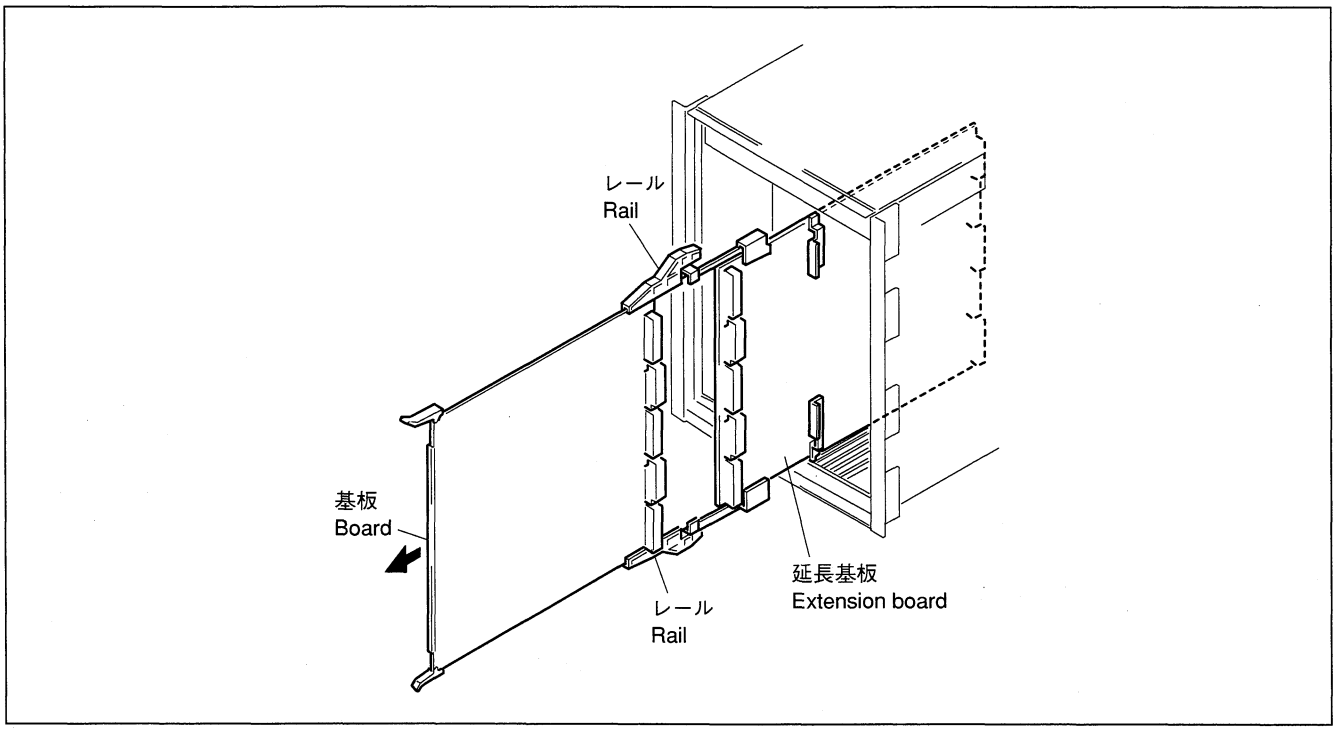

8. 延長基板のイジェクトレバーを矢印方向に開く。
9. 本機から延長基板を引き出す。

8. Pull the eject levers of the extension board in the direction of the arrow.
9. Pull out the extension board from the unit.

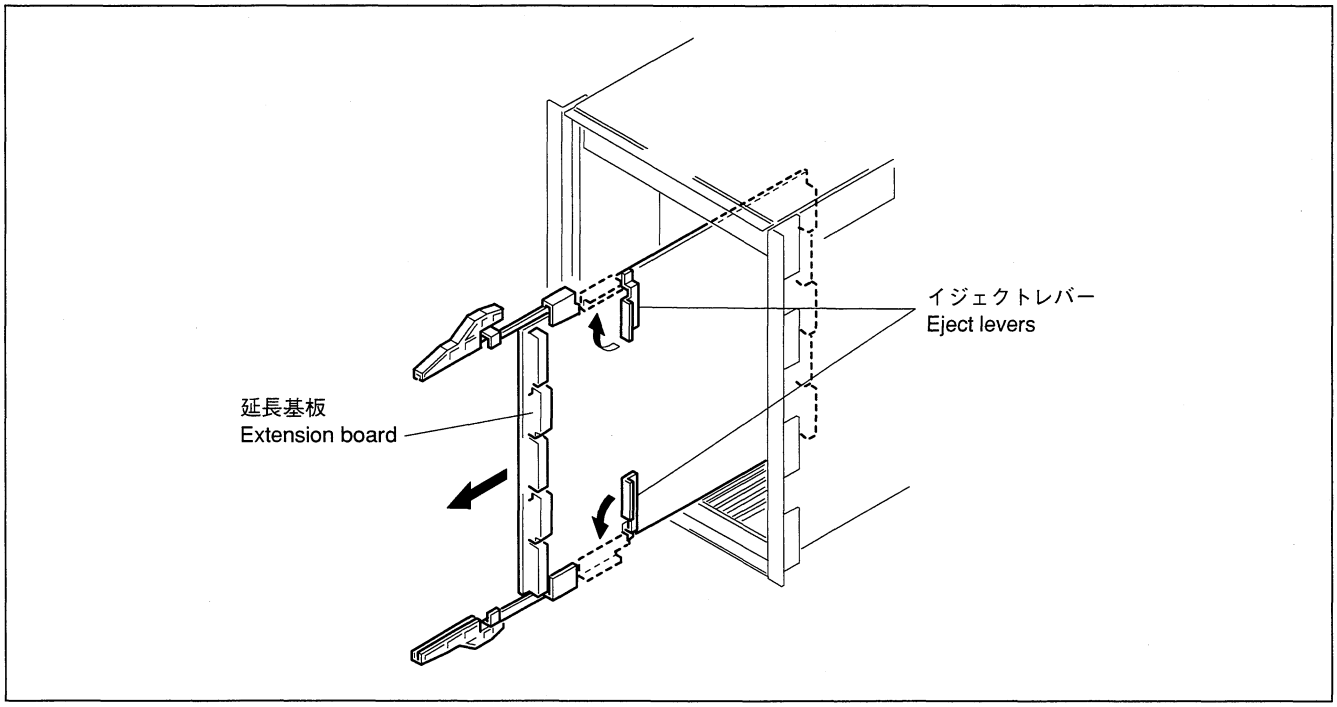

1-2. コネクタの交換

⚠注意
部品の交換をするときは，必ず電源スイッチをOFFしてから，外部に設置されたブレーカをOFFするか電源コードを抜いてください。
電源を入れた状態で部品の交換を行うと，基板が壊れたり感電する恐れがあります。

1-2-1. D-SUB コネクタの交換


1. ネジ12本を外し，CN-1439基板組立を取り外す。

1-2. Replacement of Connectors

CAUTION
To avoid shock hazards and/or damage to the mounted circuit boards, be sure to turn off the power switch, and then turn off the breaker at the outside of HDS-7000 or unplug the power cord before replacing the parts.


1-2-1. Replacement of D-SUB Connectors

1. Remove the twelve screws and the CN-1439 board assembly.

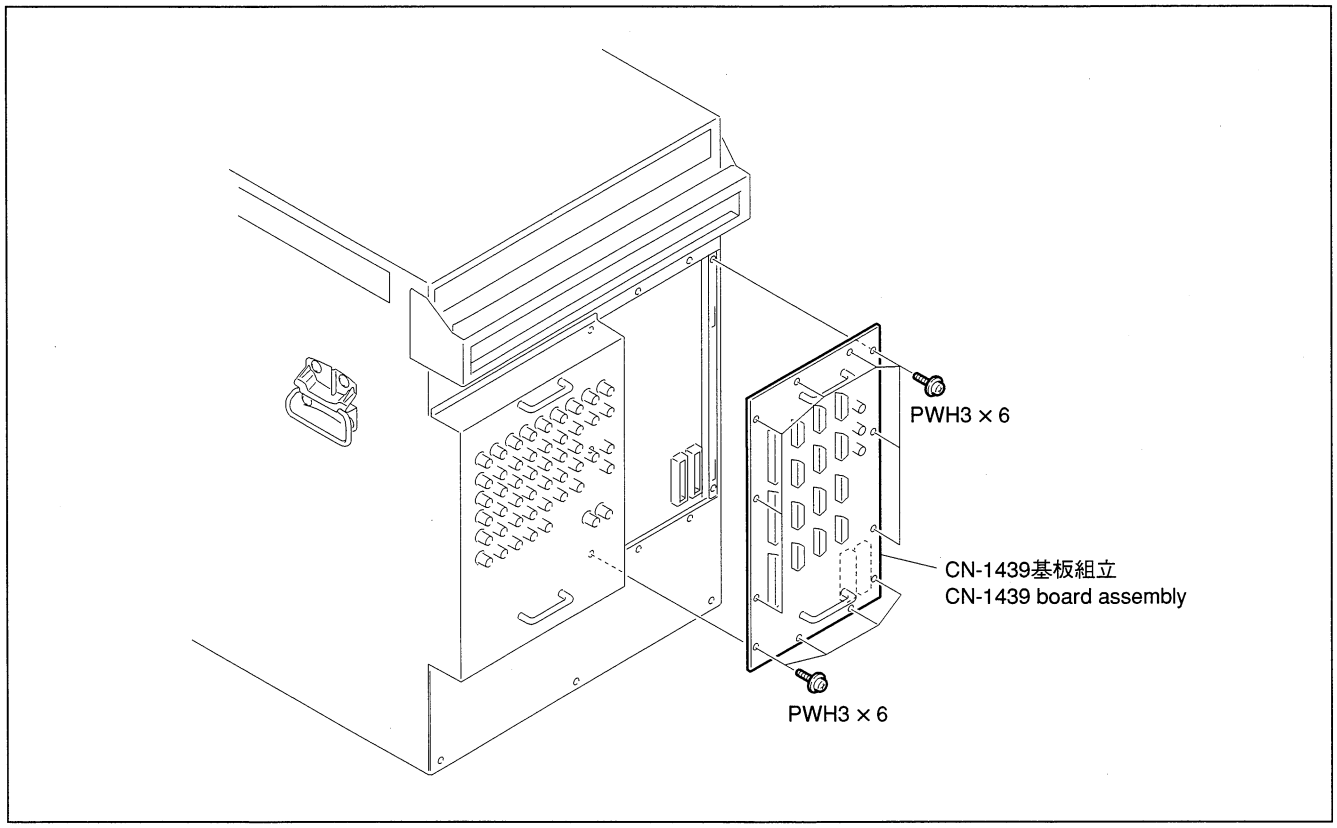


2. ネジ6本を外し，CN取付板 (R) を取り外す。

2. Remove the six screws and the CN bracket (R).

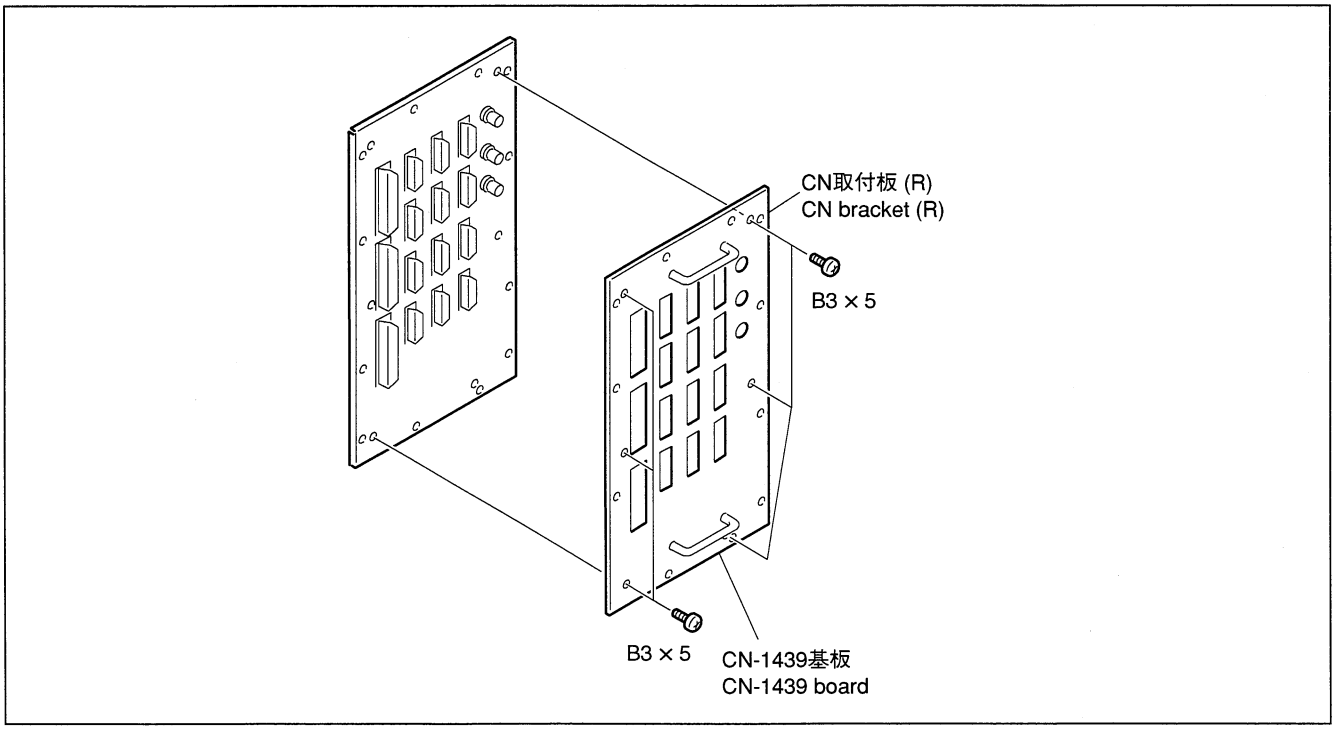

3. 交換するD-SUBコネクタを固定しているネジ2本を外す。
4. 交換するD-SUBコネクタのはんだ付けを外す。
5. 新しいD-SUBコネクタを，CN-1439基板組立にネジ2本で止める。
6. 新しいD-SUBコネクタをはんだ付けする。

3. Remove the two screws securing the D-SUB connector to replace.
4. Desolder the D-SUB connector to replace.
5. Secure a new D-SUB connector to the CN-1439 board assembly by the two screws.
6. Solder a new D-SUB connector.

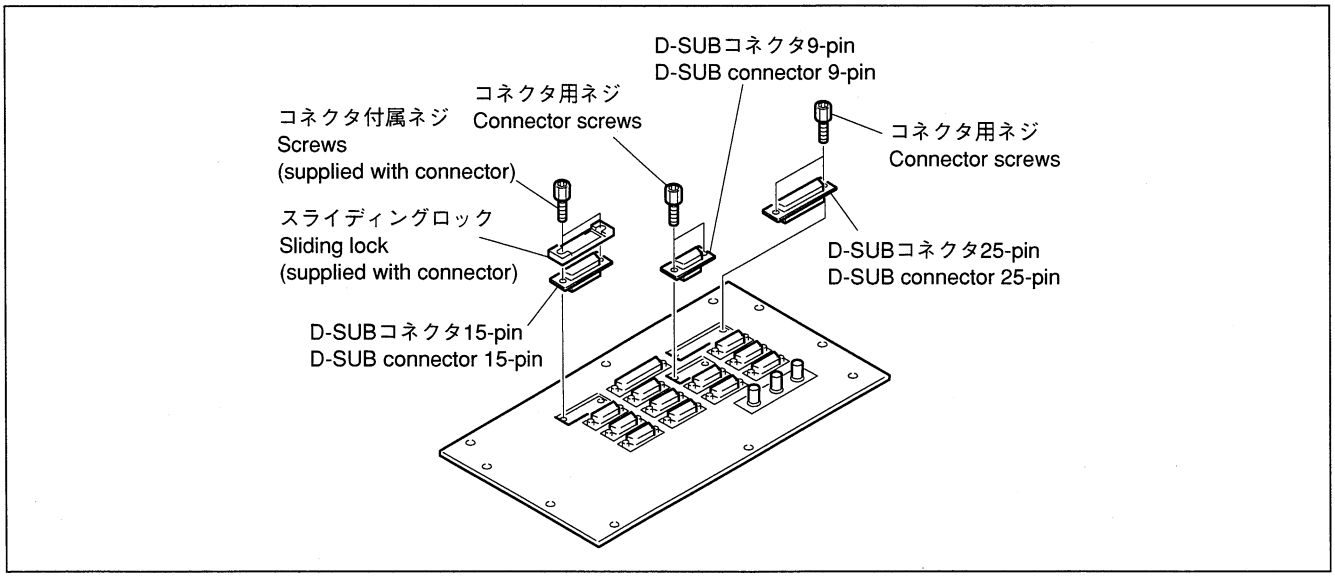

7. CN取付板 (R) をネジ6本で止める。
8. CN-1439基板組立をネジ12本で止める。

7. Secure the CN bracket (R) to the CN-1439 board assembly by the six screws.
8. Secure the CN-1439 board assembly to the unit by the twelve screws.

1-2-2. CN-1439 基板 BNC コネクタの交換

適用シリアル : 10001 ～ 12005

1. CN-1439基板組立を取り外す。(1-2-1項 参照)
2. CN取付板 (R) 上のネジ6本を外し, CN取付板 (R) を取り外す。
3. CN 補強板 (2) を裏から止めているネジ2本を外す。
4. 全ての BNC コネクタのはんだ付けを外す。
5. 全てのBNCコネクタのナットとワッシャを外し, CN補強板 (2) から外す。
6. 全ての BNC コネクタを基板に差し込む。
7. CN 補強板 (2) を基板にネジ2本で取り付ける。
8. 全てのBNCコネクタを, ナットとワッシャでCN取付板 (R) に固定する。

   注意

   はんだ付けのまえに, 必ずBNC コネクタを CN 取付板 (R) に仮止めしてください。仮止めしないで先にはんだ付けした場合, BNCコネクタをCN取付板 (R) に完全にはめ込めないことがあります。
9. 全ての BNC コネクタをはんだ付けする。
10. CN取付板 (R) を, CN 補強板 (1) にネジ6本で取り付ける。


1-2-2. Replacement of BNC Connectors on CN-1439 Board

Serial No.: 10001 through 12005

1. Remove the CN-1439 board assembly. (Refer to Section 1-2-1.)
2. Remove the six screws on the CN bracket (R) shown in the figure, and then remove the CN bracket (R).
3. Remove the two screws fixing the CN reinforcement (2) from the rear.
4. Remove soldering of all BNC connectors.
5. Remove the nuts and washers of all BNC connectors, and remove it from the CN reinforcement (2).
6. Insert the pins of all BNC connectors to the CN board.
7. Fix the CN reinforcement (2) to the CN board with the two screws.
8. Fix all BNC connectors to the CN bracket (R) by the nuts and washers.

   Note

   Before soldering, be sure to temporarily secure the BNC connector to the CN bracket (R).
   If not, the BNC connector may not be securely inserted in the hole of the CN bracket (R).
9. Solder all BNC connectors.
10. Secure the CN bracket (R) to the CN reinforcement (1) by the six screws.

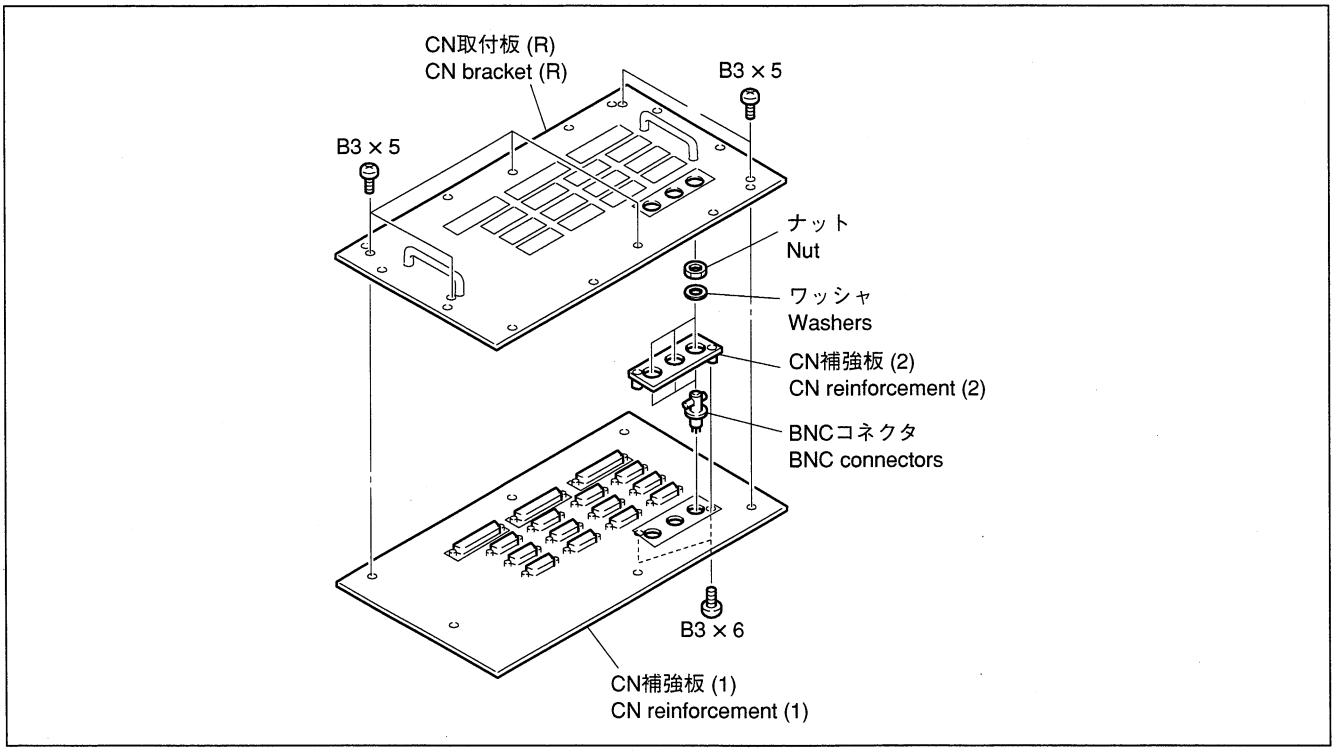

11. CN-1439 基板組立を取り付ける。

11. Install the CN-1439 board assembly.

適用シリアル：12006 以降

1. CN-1439基板組立を取り外す。(1-2-1項 参照)
2. CN取付板 (R) 上のネジ6本を外し，CN取付板 (R) を取り外す。
3. D-SUB コネクタのはんだ付けを全て外す。
4. CN 補強板 (1) のネジ7本を外し，CN 補強板 (1) を取り外す。
5. CN 補強板 (2) を裏から止めているネジ2本を外す。
6. 全ての BNC コネクタのはんだ付けを外す。
7. 全てのBNCコネクタのナットとワッシャを外し，CN補強板 (2) から外す。
8. 全ての BNC コネクタを基板に差し込む。
9. CN 補強板 (2) を基板にネジ2本で取り付ける。
10. 全てのBNCコネクタを，ナットとワッシャでCN取付板 (R) に固定する。

    注意


    はんだ付けのまえに，必ずBNC コネクタを CN 取付板 (R) に仮止めしてください。仮止めしないで先にはんだ付けした場合，BNCコネクタをCN取付板 (R) に完全にはめ込めないことがあります。
11. 全ての BNC コネクタをはんだ付けする。

Serial No.: 12006 and higher

1. Remove the CN-1439 board assembly. (Refer to Section 1-2-1.)
2. Remove the six screws on the CN bracket (R) shown in the figure, and then remove the CN bracket (R).
3. Remove all soldering of the D-sub connector.
4. Remove the seven screws of the CN reinforcement (1), and remove the CN reinforcement (1).
5. Remove the two screws fixing the CN reinforcement (2) from the rear.
6. Remove soldering of all BNC connectors.
7. Remove the nuts and washers of all BNC connectors, and remove it from the CN reinforcement (2).
8. Insert the pins of all BNC connectors to the CN board.
9. Fix the CN reinforcement (2) to the CN board with the two screws.
10. Fix all BNC connectors to the CN bracket (R) by the nuts and washers.

    Note

    Before soldering, be sure to temporarily secure the BNC connector to the CN bracket (R).
    If not, the BNC connector may not be securely inserted in the hole of the CN bracket (R).
11. Solder all BNC connectors.

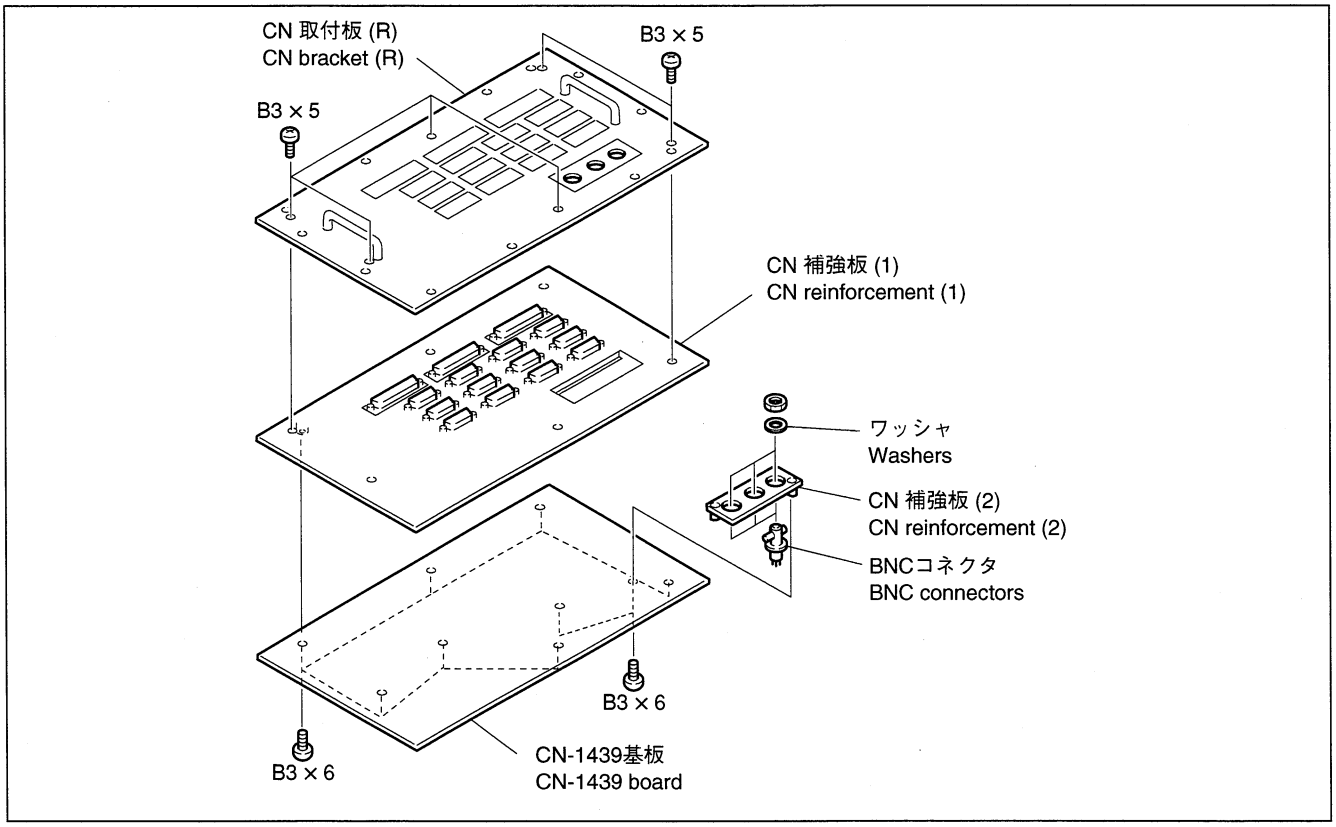

12. 手順1～4の逆の手順で組み立てる。


12. Assemble the parts in the reverse order of the steps 1 through 4.

1-2-3. INPUT/OUTPUT 同軸ケーブルの交換

1. 交換する同軸ケーブルの，先端の BNC コネクタのネジ 2 本を外す。


1-2-3. Replacement of Input/Output Coaxial Cable

1. Remove the two screws from the BNC connector at the tip of the coaxial cable to replace.

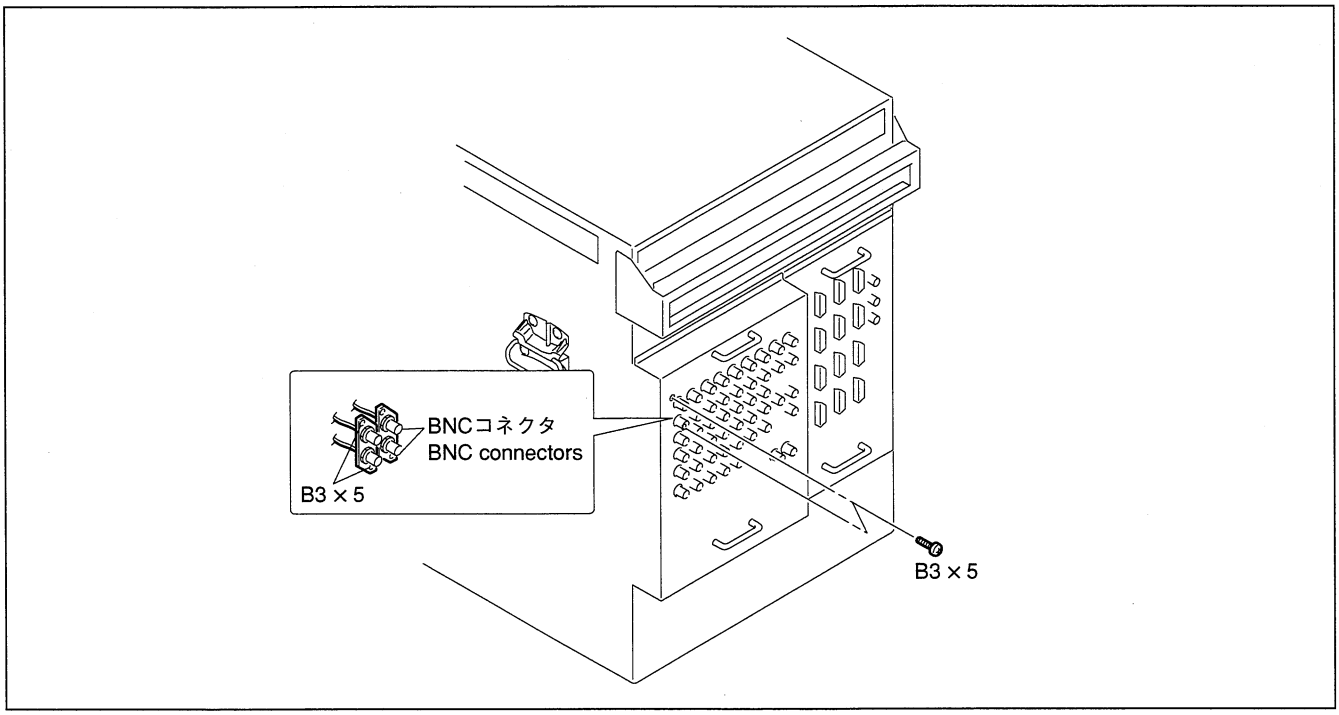


2. ネジ 12 本を外し，CN 取付板 (L) を矢印方向に開く。

2. Remove the twelve screws and open the CN bracket (L) in the direction indicated by the arrow.

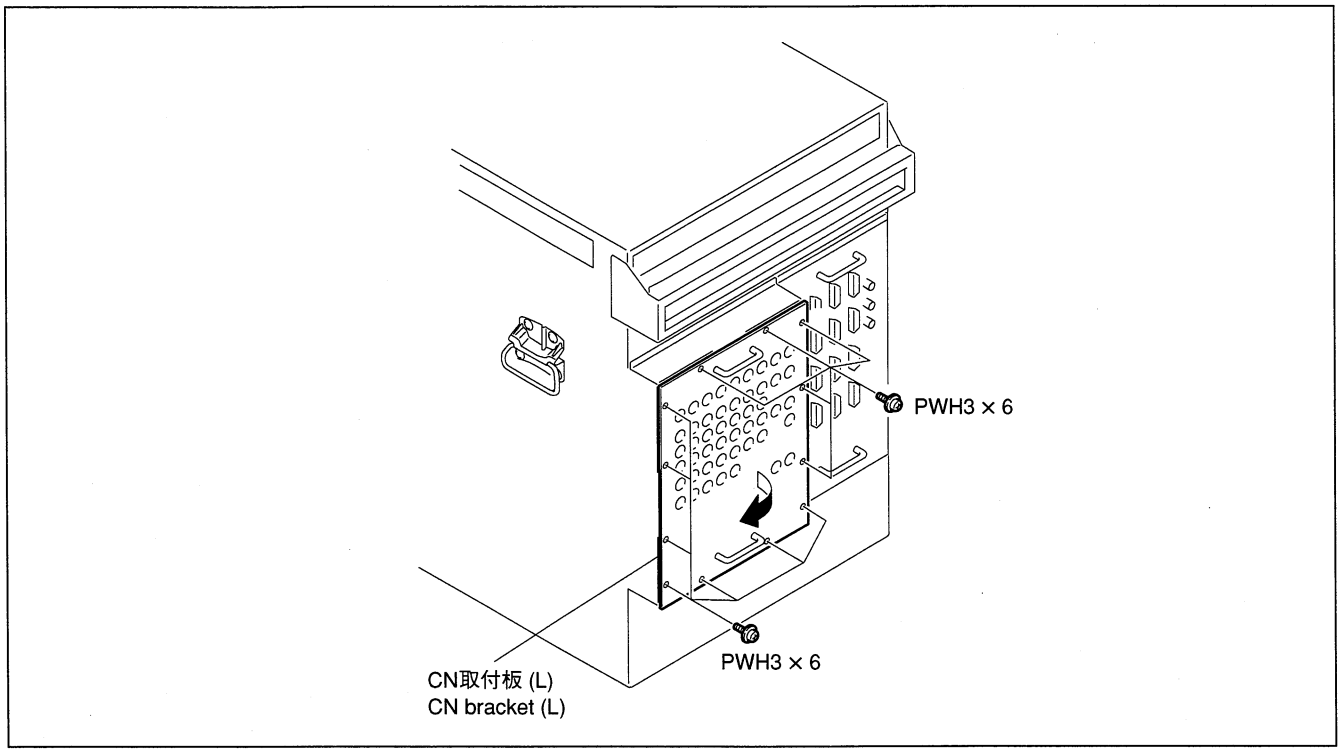


3. CN取付板 (L) の落ち止め板を図示部に引っかける。

3. Hook the drop-safe plates of the CN bracket (L) as shown.

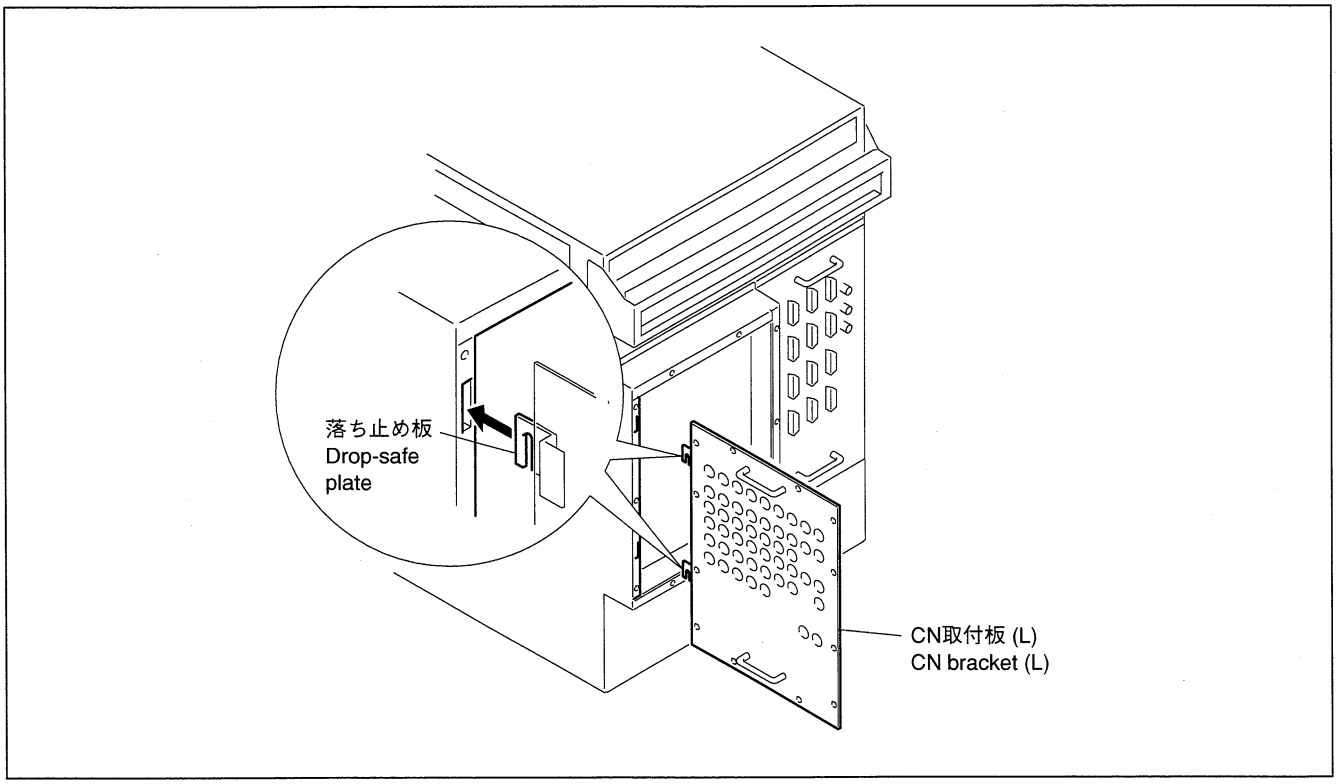

4. 交換する同軸ケーブルのBNCコネクタを外す。
5. 同軸ケーブルを束ねている結束バンドをカットする。
6. フロントパネルを取り外す。(Maintenance Manual Part1 1-1-1項 参照)
7. 交換する同軸ケーブルが接続されている基板 (DI-21/DI-37基板またはOUT-7/OUT-20基板) およびその左右の基板を取り外す。(Maintenance Manual Part1 1-1-3項 参照)
8. フロント側から手を入れて, 手順3で外した同軸ケーブルが接続されている同軸コネクタを, 同軸コネクタ抜き治具を使用してMB-494基板のハウジングから引き抜く。
   名　称　：同軸コネクタ抜き治具
   部品番号：J-6520-200-A
9. CN取付板 (L) に新しい同軸ケーブルのBNCコネクタをネジ2本で止める。

4. Disconnect the BNC connector of the coaxial cable to replace.
5. Cut the band bundling the coaxial cable.
6. Remove the front panel. (Refer to Section 1-1-1 in the maintenance manual part 1.)
7. Remove the board (DI-21/DI-37 or OUT-7/OUT-20 board), to which the coaxial cable to be replaced is connected, and the boards on the right and left of it. (Refer to Section 1-1-3 in the maintenance manual part 1.)
8. Put your hand from the front side and pull out the coaxial connector, to which the coaxial cable removed in step 3 is connected, from the MB-494 board using a coaxial cable disconnecting tool.
   Name　: Coaxial cable disconnecting tool
   Part No.: J-6520-200-A
9. Secure the BNC connector of a new coaxial cable to the CN bracket (L) with two screws.

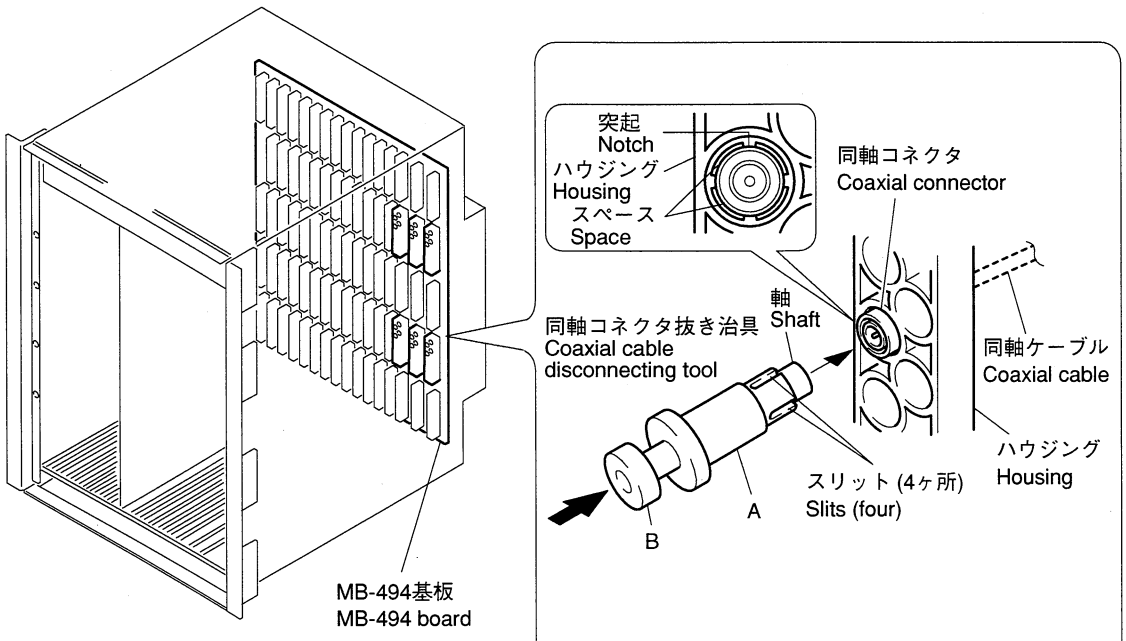

同軸コネクタの外し方
1. 同軸コネクタに軸を差し込む。
2. ハウジングの突起と治具のスリットに合わせてからA部を矢印方向に押す。
3. B部を矢印方向に押す。
4. 同軸ケーブルがハウジングから外れる。

Disconnecting the coaxial connector
1. Insert shaft with the coaxial connector.
2. Match the four slits of the tool to the notches of the housing, and push portion A in the direction indicated by the arrow.
3. Push portion B in the direction indicated by the arrow.
4. The coaxil cable is removed from the housing.

10. 手順9で取り付けた同軸ケーブルの同軸コネクタを，MB-494基板のハウジングに差し込む。
取り付けたBNCコネクタに対する同軸コネクタの接続先は下図の通り。


注意

接続先を間違えると信号が正しく入出力されません。

10. Insert the coaxial connector of the coaxial cable fixed in step 9 into the housing on the MB-494 board.
The coaxial connector is connected to the secured BNC connector as shown in the figure below.

Note

If the coaxial connector is incorrectly connected to the BNC connector, a signal is not input and output properly.

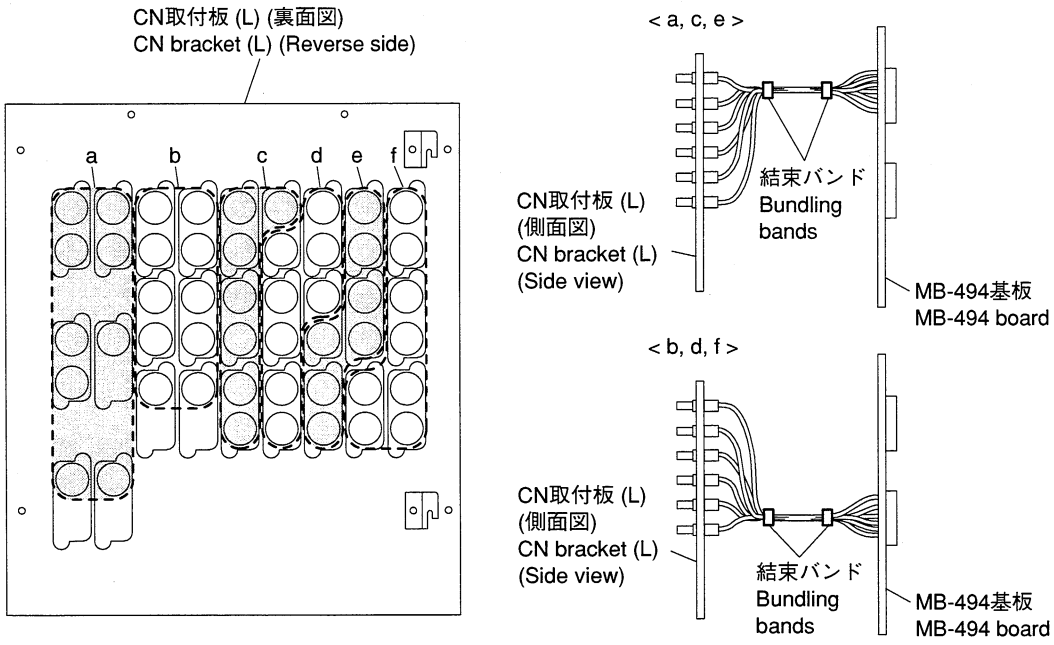

CN取付板 (L)の表示 Indication on CN bracket (L)	MB-494基板 MB-494 board		CN取付板 (L)の表示 Indication on CN bracket (L)	MB-494基板 MB-494 board	
CLEAN OUTPUT	CNW16	CLN	PRIMARY INPUTS 6	CNW15	IN6
ME-1 OUTPUTS 1	CNW16	1ME1	PRIMARY INPUTS 7	CNW15	IN7
ME-1 OUTPUTS 2	CNW16	1ME2	PRIMARY INPUTS 8	CNY15	IN8
ME-2 OUTPUTS 1	CNW16	2ME1	PRIMARY INPUTS 9	CNY15	IN9
ME-2 OUTPUTS 2	CNW16	2ME2	PRIMARY INPUTS 10	CNY15	IN10
PGM OUTPUTS 1	CNW16	PGM1	PRIMARY INPUTS 11	CNY15	IN11
PGM OUTPUTS 2	CNW16	PGM2	PRIMARY INPUTS 12	CNY15	IN12
PGM OUTPUTS 3	CNW16	PGM3	PRIMARY INPUTS 13	CNY15	IN13
PVW OUTPUT	CNW16	PVW	PRIMARY INPUTS 14	CNY15	IN14
AUX OUTPUTS 1	CNY16	AX1	PRIMARY INPUTS 15	CNY15	IN15
AUX OUTPUTS 2	CNY16	AX2	PRIMARY INPUTS 16	CNW14	IN16
AUX OUTPUTS 3	CNY16	AX3	PRIMARY INPUTS 17	CNW14	IN17
AUX OUTPUTS 4	CNY16	AX4	PRIMARY INPUTS 18	CNW14	IN18
AUX OUTPUTS 5	CNY16	AX5	PRIMARY INPUTS 19	CNW14	IN19
AUX OUTPUTS 6	CNY16	AX6	PRIMARY INPUTS 20	CNW14	IN20
AUX OUTPUTS 7	CNY16	AX7	PRIMARY INPUTS 21	CNW14	IN21
AUX OUTPUTS 8	CNY16	AX8	PRIMARY INPUTS 22	CNW14	IN22
AUX OUTPUTS 9	CNY16	AX9	PRIMARY INPUTS 23	CNY14	IN23
AUX OUTPUTS 10	CNY16	AX10	PRIMARY INPUTS 24	CNY14	IN24
PRIMARY INPUTS 1	CNW15	IN1	PRIMARY INPUTS 25	CNY14	IN25
PRIMARY INPUTS 2	CNW15	IN2	PRIMARY INPUTS 26	CNY14	IN26
PRIMARY INPUTS 3	CNW15	IN3	PRIMARY INPUTS 27	CNY14	IN27
PRIMARY INPUTS 4	CNW15	IN4	PRIMARY INPUTS 28	CNY14	IN28
PRIMARY INPUTS 5	CNW15	IN5	PRIMARY INPUTS 29	CNY14	IN29
			PRIMARY INPUTS 30	CNY14	IN30

11. 結束バンドで同軸ケーブルを束ねる。
12. CN取付板 (L) を閉じ，ネジ12本で止める。
13. 手順1～7の逆の手順で本機を組み立てる。


11. Bundle the coaxial cable using a bundling band.
12. Close the CN bracket (L) and fix it with twelve screws.
13. Assemble the unit in the reverse order of the steps 1 through 7.

1-2-4. DI-21/DI-37, OUT-7/OUT-20 基板の同軸ケーブルの交換

1. 本機から DI-21/DI-37, OUT-7/OUT-20 基板を引き出す。(Maintenance Manual Part1 1-1-3 項 参照)
2. DI-21/DI-37, OUT-7/OUT-20基板の同軸ケーブルを押さえている配線止めを外す。
3. 交換する同軸ケーブルの先端の同軸コネクターを同軸コネクタ抜き治具を使用して，ハウジングから引き抜く。
   名　称　：同軸コネクタ抜き治具
   部品番号：J-6520-200-A
4. 手順3で引き抜いた同軸ケーブルが接続されている同軸コネクタを，RX-35/RX-46 または TX-52/TX-68 基板から引き抜く。
   - DI-21/DI-37基板の同軸ケーブルを交換するときはRX-35/RX-46 基板
   - OUT-7/OUT-20基板の同軸ケーブルを交換するときは TX-52/TX-68 基板

1-2-4. Replacement of Coaxial Cable on DI-21/DI-37 and OUT-7/OUT-20 Boards

1. Pull out the DI-21/DI-37 and OUT-7/OUT-20 boards from the unit. (Refer to Section 1-1-3 in the maintenance manual part 1.)
2. Remove the wiring clip holding the coaxial cable on the DI-21/DI-37 and OUT-7/OUT-20 boards.
3. Pull out the coaxial connector at the tip of the coaxial cable to be replaced from the housing using a coaxial cable disconnecting tool.
   Name　: Coaxial cable disconnecting tool
   Part No. : J-6520-200-A
4. Pull out the coaxial connector, to which the coaxial cable pulled out in step 3 is connected, from the RX-35/RX-46 and TX-52/TX-68 boards.
   - Pull out the coaxial connector from the RX-35/RX-46 board when the coaxial cable on the DI-21/DI-37 board is replaced.
   - Pull out the coaxial connector from the TX-52/TX-68 board when the coaxial cable on the OUT-7/OUT-20 board is replaced.

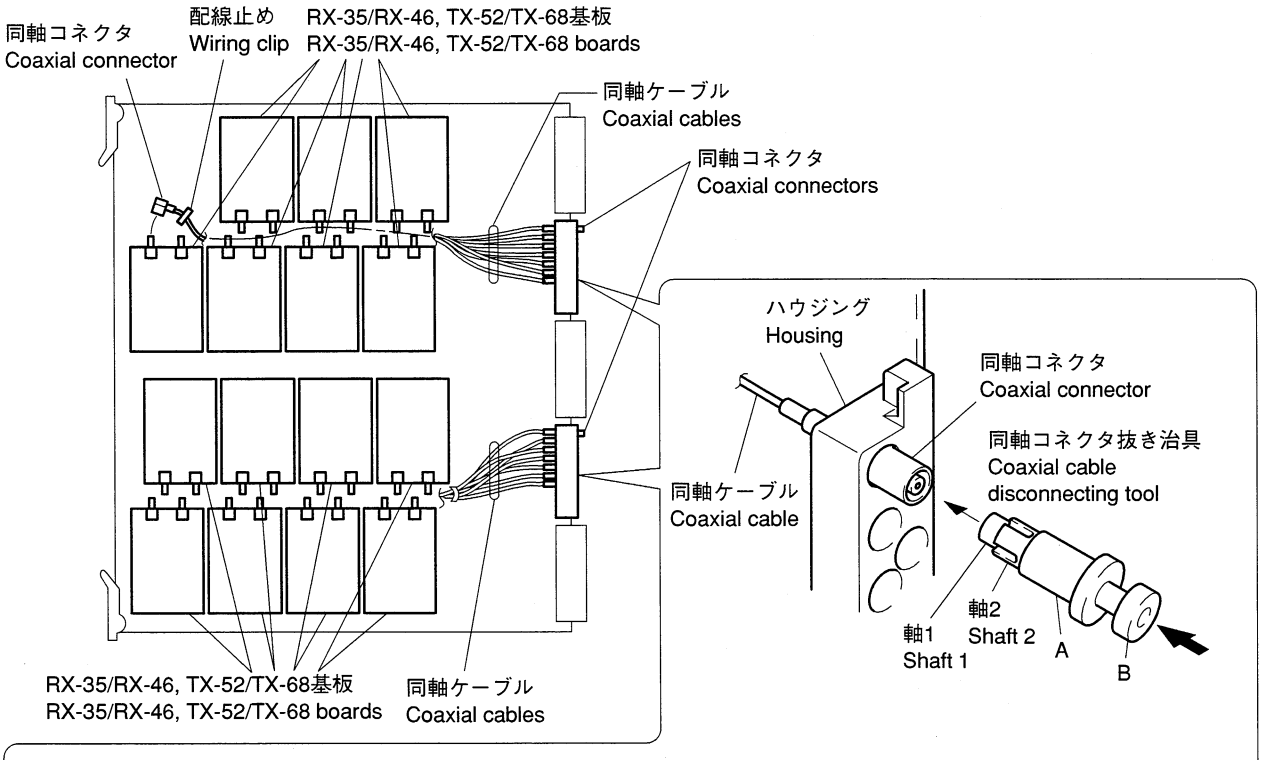

同軸コネクタの外し方
1. 同軸コネクタに軸1を合わせる。
2. 軸2が同軸コネクタをかぶせるようにA部を矢印方向に押す。
3. B部を矢印方向に押す。
4. 同軸ケーブルがハウジングから外れる。

Disconnecting the coaxial connector
1. Aligh shaft 1 with the coaxial connector.
2. Push portion A in the direction indicated by the arrow so that shaft 2 covers the coaxial cable.
3. Push portion B in the direction indicated by the arrow.
4. The coaxial cable is removed from the housing.

5. 1から4の逆の手順で新しい同軸ケーブルを取り付ける。

5. Install a new coaxial cable in the reverse order of the steps 1 through 4.

1-3. HKDS-7690A 電源部の交換

注意

HKDS-7690Aの部品を交換した後は,電源電圧調整を行ってください。(HDS-7000に付属のインストレーションマニュアル参照。)

1-3-1. エラー表示

HKDS-7690Aでは,前面パネルのLEDを確認することで電源のトラブル箇所を特定できます。


1-3. HKDS-7690A Power Supply Block Replacement

Note

When any parts of the HKDS-7690A are replaced, perform an adjustment of the power supply voltage. (Refer to the installation manual, supplied with the HDS-7000.)

1-3-1. Error Indications

In the HKDS-7690A, cause of the trouble can be located by checking the LED indications on the front panel.

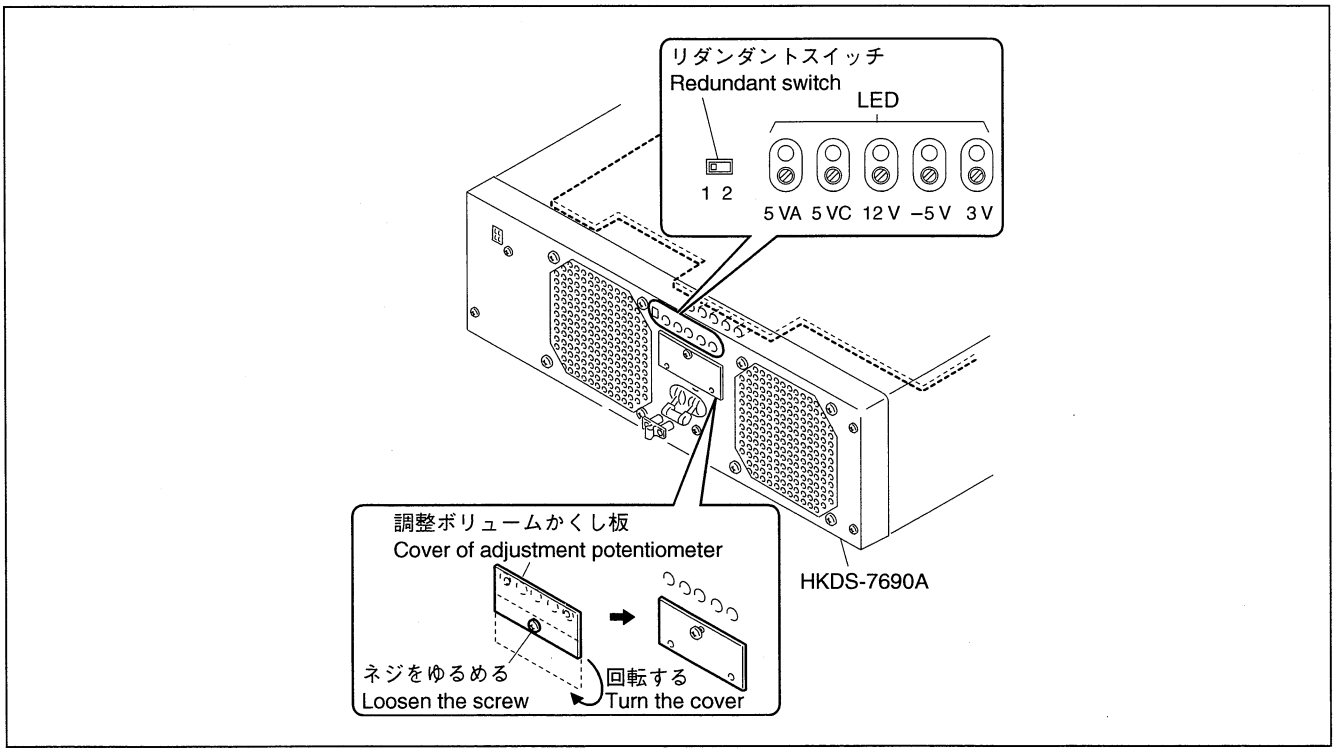

確認手順

1. HKDS-7690Aのフロントカバーを外す。
2. ネジをゆるめて，調整ボリュームかくし板を半回転する。(上図参照)
3. リダンダントスイッチを「2」側に設定する。

   注意

   リダンダントスイッチが「1」側に設定されていると,故障箇所を特定できません。確認を行う場合は，必ずリダンダントスイッチを「2」側に設定してください。

4. 次ページの表を参考にして,電源のトラブル箇所を特定する。
5. 確認後，リダンダントスイッチの設定を「1」側に戻す。

Check procedure

1. Remove the front cover of the HKDS-7690A.
2. Loosen the screw and turn the cover of adjustment potentiometer by half turn in the direction of the arrow. (Refer to the above illustration.)
3. Set the redundant switch to position “2”.

   Note

   When the redundant switch is set to position “1”, cause of the errors cannot be located. To check location of error, be sure to set the redundant switch to position “2”.

4. Locate cause of the power supply error by referring to the table on the next page.
5. After the checking, return the redundant switch to position “1”.

エラー表示

電源の状態	LED の状態					トラブル箇所
	5 VA	5 VC	12 V	−5 V	3 V	
正常	点灯 (緑)	点灯 (緑)	点灯 (緑)	点灯 (緑)	点灯 (緑)	−
5 VA 系統のトラブル	消灯 (または暗い緑)	点灯 (緑)	点灯 (緑)	点灯 (緑)	点灯 (緑)	RE-196 基板の F202 ～ F205, CP202 ～ CP205
5 VC 系統のトラブル	点灯 (緑)	消灯 (または暗い緑)	点灯 (緑)	点灯 (緑)	点灯 (緑)	RE-196 基板の F206, F207, CP206, CP207
12 V 系統のトラブル	点灯 (緑)	点灯 (緑)	消灯 (または暗い緑)	点灯 (緑)	点灯 (緑)	RE-196 基板の F214, F215, CP214
−5 V 系統のトラブル	点灯 (緑)	点灯 (緑)	点灯 (緑)	消灯 (または暗い緑)	点灯 (緑)	RE-196 基板の F213, CP213
3 V 系統のトラブル	点灯 (緑)	点灯 (緑)	点灯 (緑)	点灯 (緑)	消灯 (または暗い緑)	RE-196 基板の F208, F210, F212, CP208, CP210, CP212
RE-194 基板のトラブル	消灯 (または暗い緑)	消灯 (または暗い緑)	消灯 (または暗い緑)	消灯 (または暗い緑)	消灯 (または暗い緑)	RE-194 基板の PS101 ～ PS108, CP101 ～ CP108

Error indications

Power supply status	**LED status**					**Error location**
	5 VA	**5 VC**	**12 V**	**−5 V**	**3 V**	
Normal	Lights (in green)	Lights (in green)	Lights (in green)	Lights (in green)	Lights (in green)	−
5 VA system has an error	Lights off (or lights in dark green)	Lights (in green)	Lights (in green)	Lights (in green)	Lights (in green)	F202 to F205 and CP202 to CP205 on the RE-196 board
5 VC system has an error	Lights (in green)	Lights off (or lights in dark green)	Lights (in green)	Lights (in green)	Lights (in green)	F206, F207, CP206 and CP207 on the RE-196 board
12 V system has an error	Lights (in green)	Lights (in green)	Lights off (or lights in dark green)	Lights (in green)	Lights (in green)	F214, F215 and CP214 on the RE-196 board
−5 V system has an error	Lights (in green)	Lights (in green)	Lights (in green)	Lights off (or lights in dark green)	Lights (in green)	F213 and CP213 on the RE-196 board
3 V system has an error	Lights (in green)	Lights (in green)	Lights (in green)	Lights (in green)	Lights off (or lights in dark green)	F208, F210, F212, CP208, CP210 and CP212 on the RE-196 board
RE-194 board has an error	Lights off (or lights in dark green)	Lights off (or lights in dark green)	Lights off (or lights in dark green)	Lights off (or lights in dark green)	Lights off (or lights in dark green)	PS101 to PS108 and CP101 to CP108 on the RE-194 board

1-3-2. 外装の取り外し


フロントパネル

1. フロントカバーを開き，ネジ2本をゆるめる。
2. フロントカバーを矢印方向に持ち上げ，手前に引いて取り外す。

1-3-2. Removal of Cabinet


Front panel

1. Open the front cover and loosen the two screws.
2. Raise the front cover in the direction of the arrow and remove it.

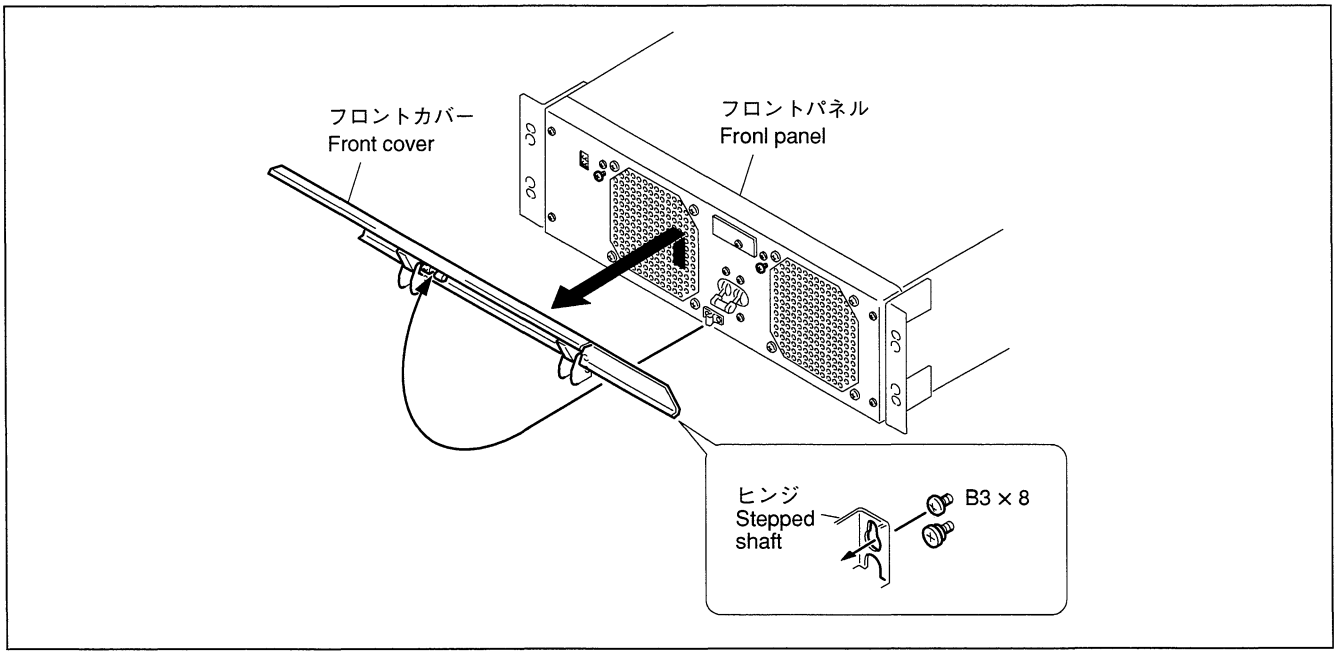


3. ネジ (PSW4 × 6) 4本を外し，ラックアングルを取り外す。
4. ブレーカを取り付けているネジ (PSW3 × 8) 4本を外す。
5. ネジ (PSW3 × 5) 4本を外し，フロントパネルを取り外す。

3. Remove the four screws (PSW4 × 6) and remove the rack angles.
4. Remove the four screws (PSW3 × 8) that secure the breaker.
5. Remove the four screws (PSW3 × 5) and remove the front panel.

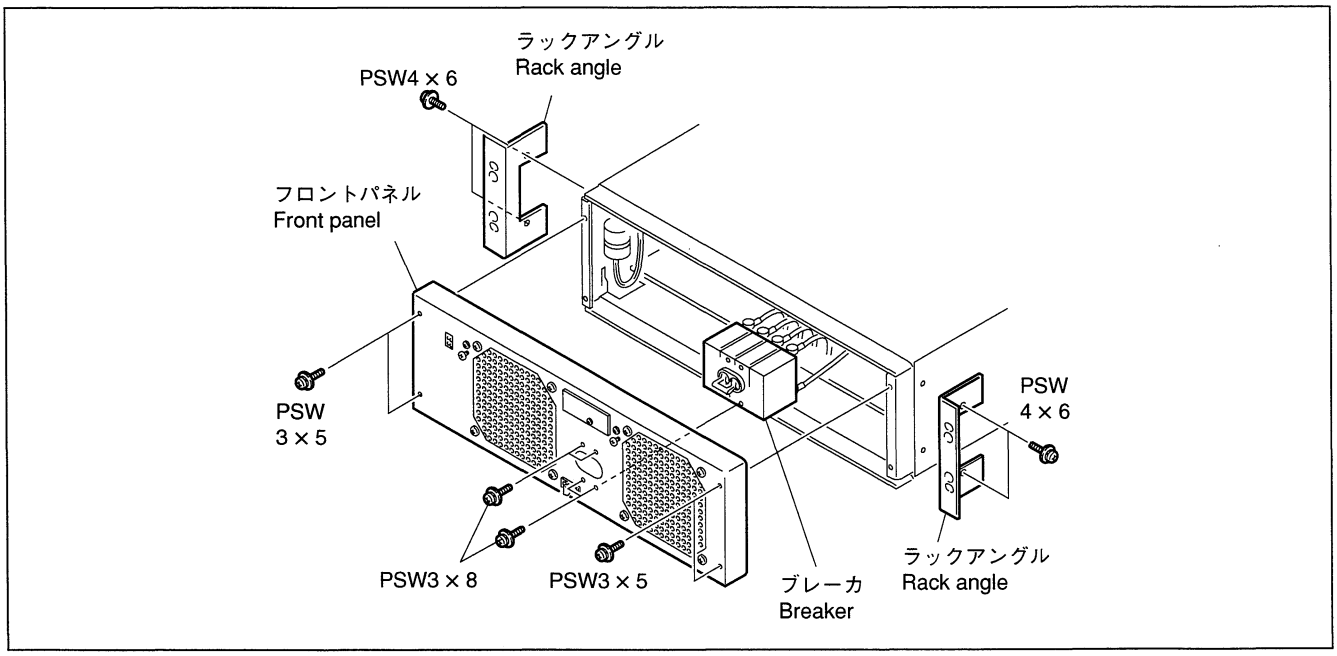

6. LE-236 基板のコネクタ (CN1) からハーネスを外す。
7. CN-2053 基板のコネクタ (CN301) からハーネスを外す。

6. Disconnect the harness from the connector (CN1) on the LE-236 board.
7. Disconnect the harness from the connector (CN301) on the CN-2053 board.

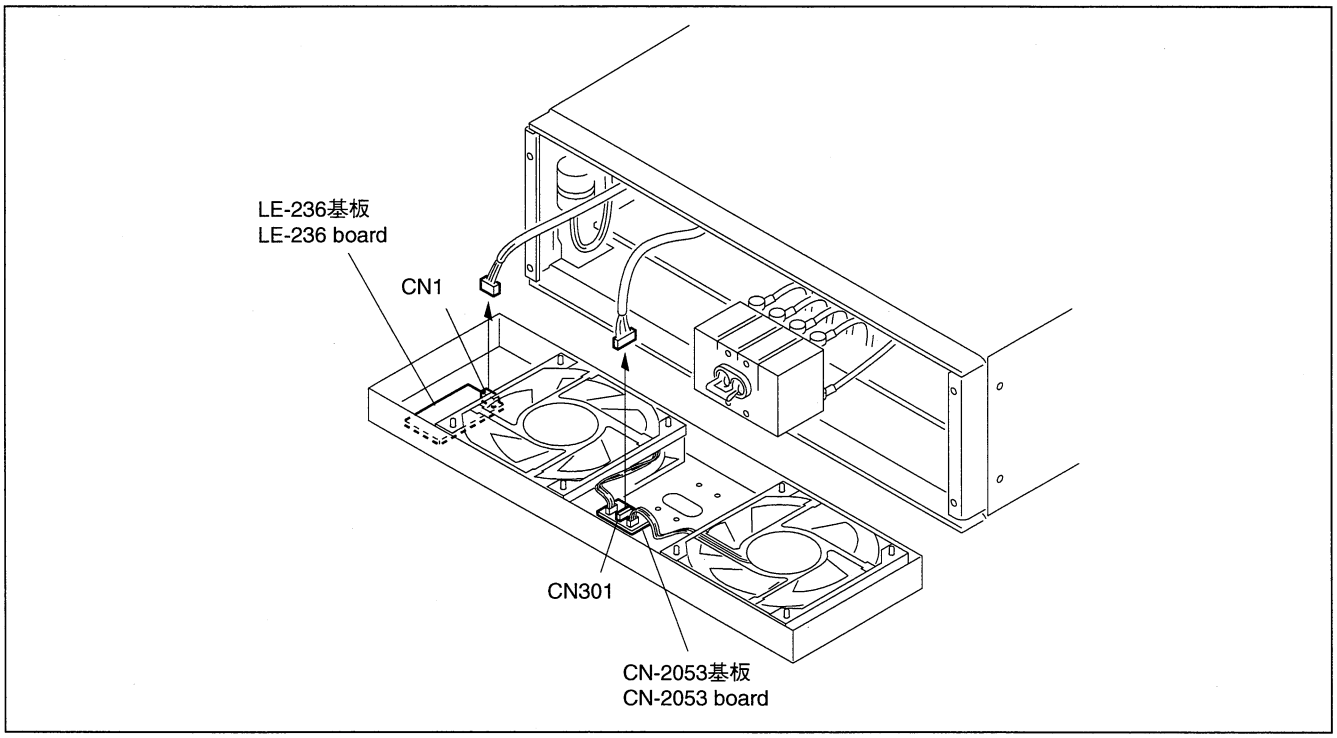


天板

1. フロントパネルを取り外す。
   (本項の「フロントパネル」参照)
2. RE-196基板のコネクタ (CN201, CN202, CN203) からハーネスを外す。


Top plate

1. Remove the front panel. (Refer to "Front panel" in this section.)
2. Disconnect the harness from the connectors (CN201, CN202 and CN203) on the RE-196 board.

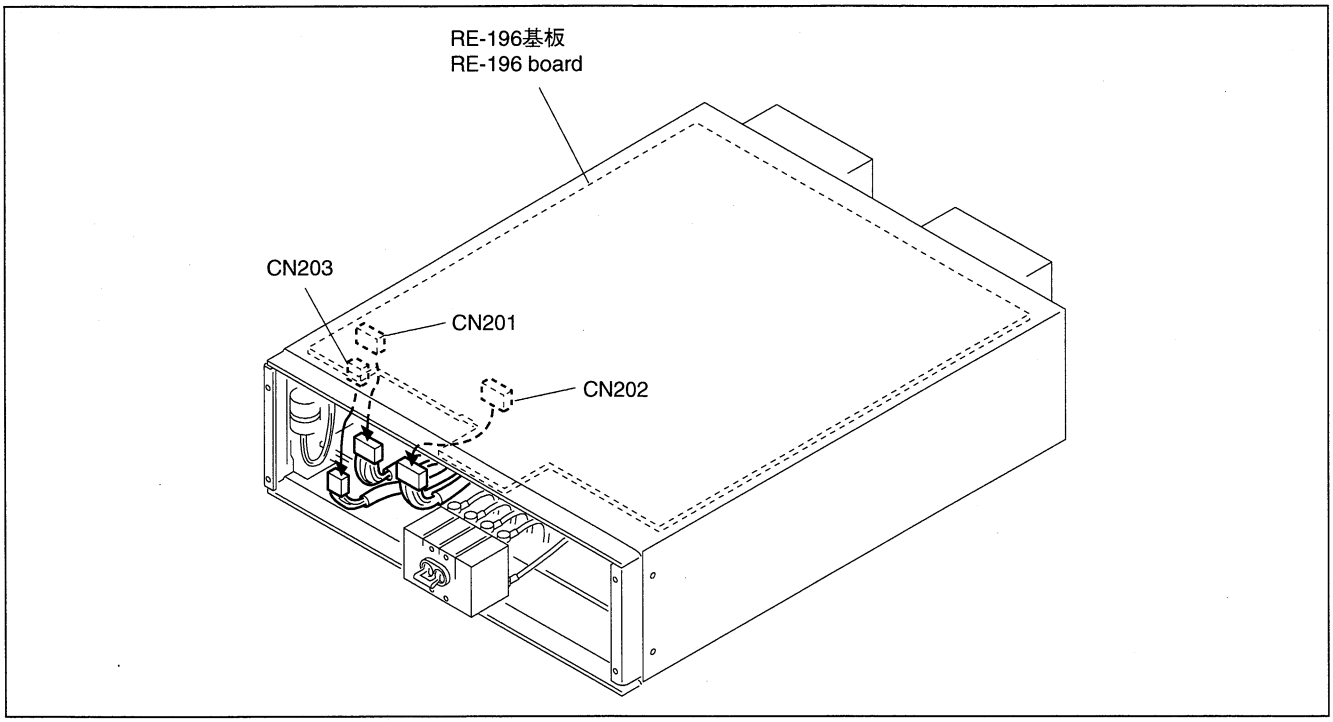


3. ネジ (K3 × 4) 4本とネジ (PSW4 × 6) 24本を外し，左右の側板を取り外す。

3. Remove the four screws (K3 × 4) and the twenty-four screws (PSW4 × 6). Remove the right and left side panels.

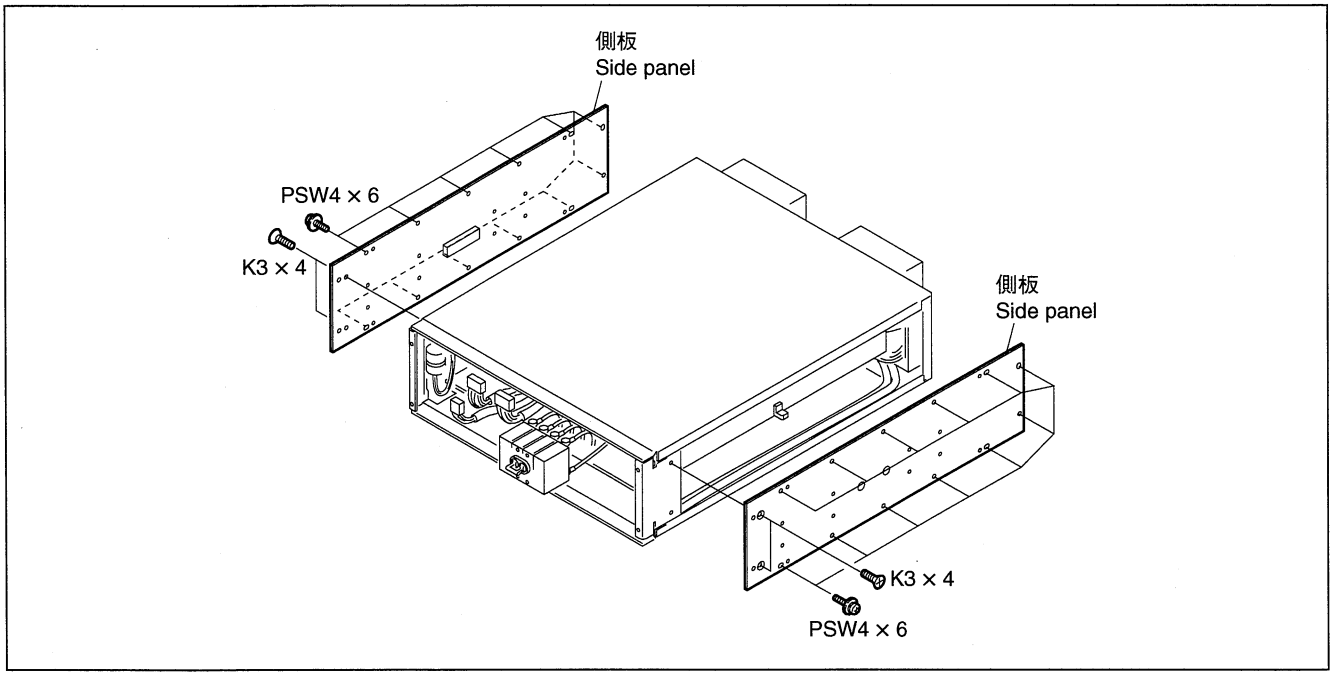


4. リアパネルからネジ (PSW4 × 6) 3本 を外す。
5. 天板からネジ (PSW4 × 5) 1本を外し，天板のリアパネル側を少し持ち上げながら，リアパネルを取り外す。

4. Remove the three screws (PSW4 × 6) from the rear panel.
5. Remove the screw (PSW4 × 5) from the top plate. While slightly raising the rear panel side of the top plate, remove the rear panel.

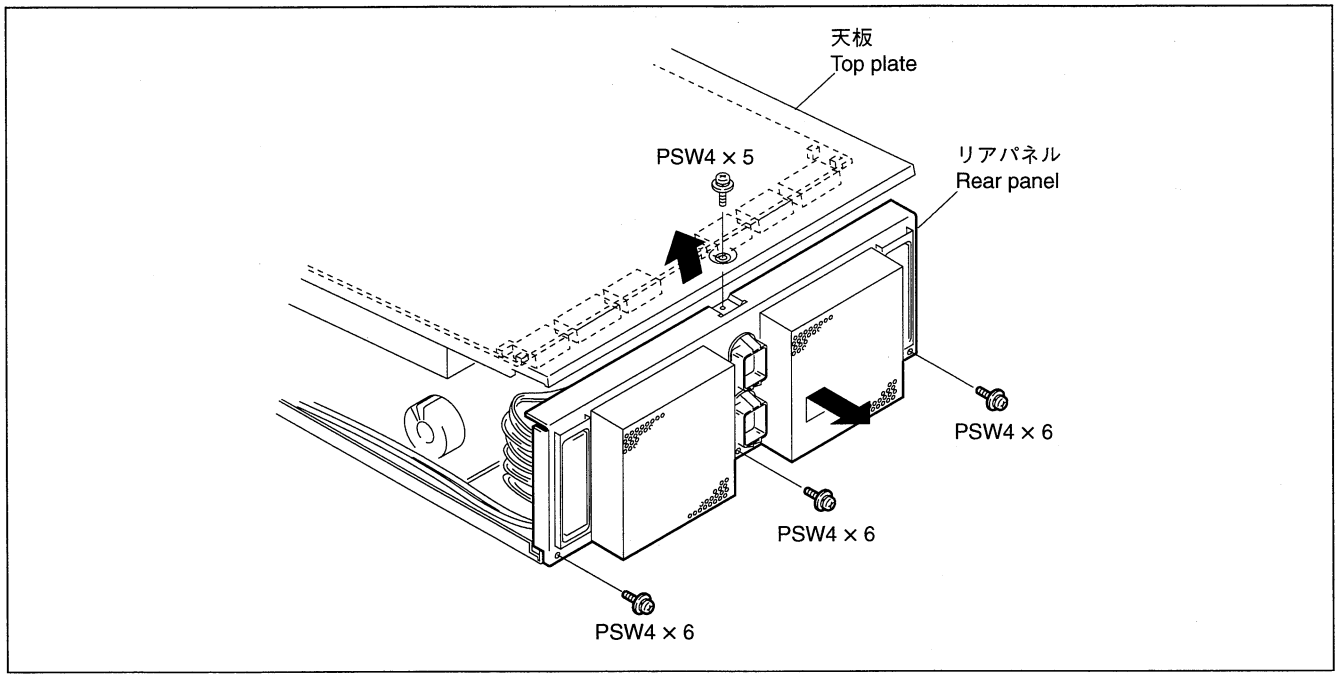

6. RE-196基板のコネクタ (CN207～CN217) からハーネスを外す。
7. 天板を取り外す。

6. Disconnect the harnesses from the connectors (CN207 to CN217) on the RE-196 board.
7. Remove the top plate.

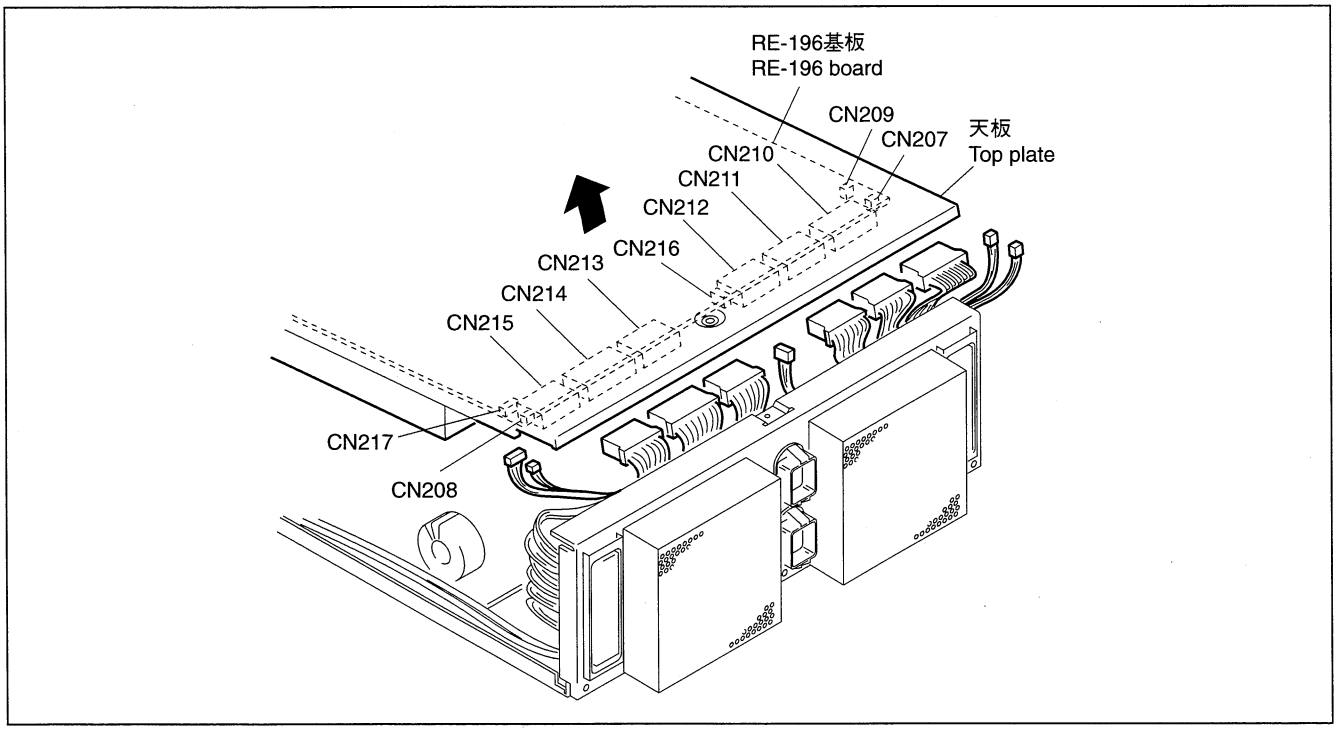

1-3-3. EC-55 基板の交換

注意

- EC-55 基板のリペア用基板は，EC-55A 基板です。
- EC-55A 基板上の調整ボリュームは，設定を変えないでください。


1. 天板を取り外す。(1-3-2項の「天板」参照)
2. EC-55 基板のコネクタ (CN401) からハーネスを外す。
3. ネジ 4 本を外し，EC-55 基板を取り外す。

1-3-3. Replacement of EC-55 Board

Notes

- When ordering the EC-55 board, the EC-55A board is supplied.
- Do not change the setup of the adjustment volume control on the EC-55A board.

1. Remove the top plate. (Refer to "Top plate" in Section 1-3-2.)
2. Disconnect the harness from the connector on the EC-55 board.
3. Remove the four screws and remove the EC-55 board.

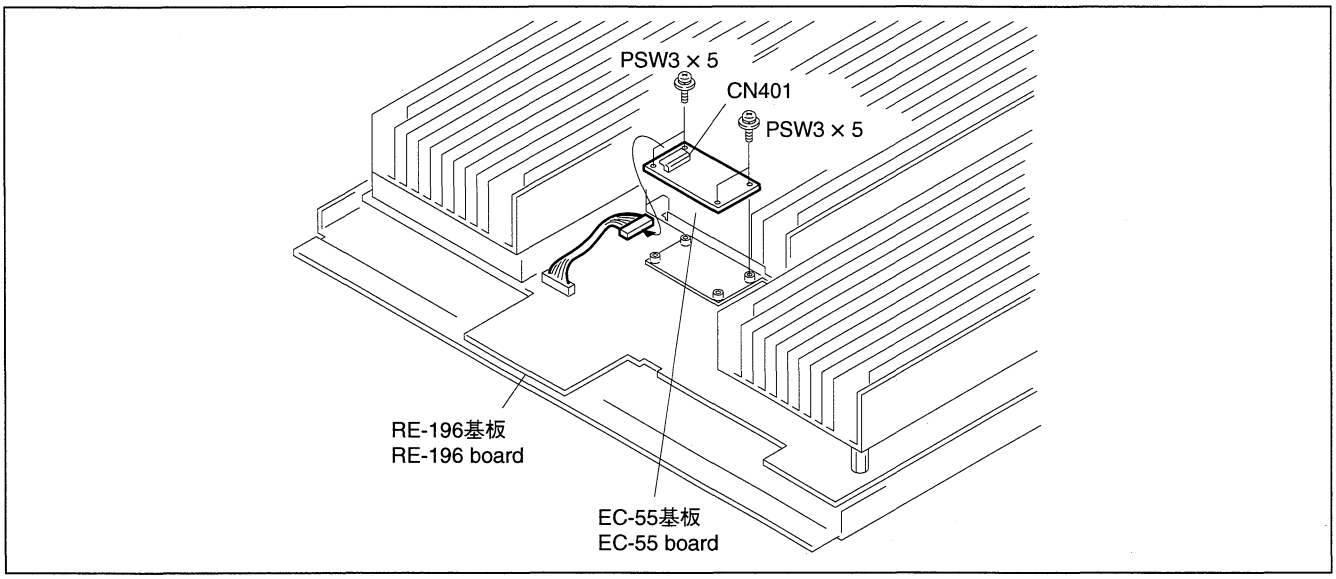

4. 新しいEC-55A基板を取り外しの逆の手順で取り付ける。


   注意

   EC-55A 基板の取り付け時に，スイッチ (SW1) の設定が「90A」側になっていることを確認してください。

4. Install a new EC-55A board in the reverse order of the steps of removal.

   Note

   Confirm that the switch (SW1) is set to position "90A" when the EC-55A board is installed.

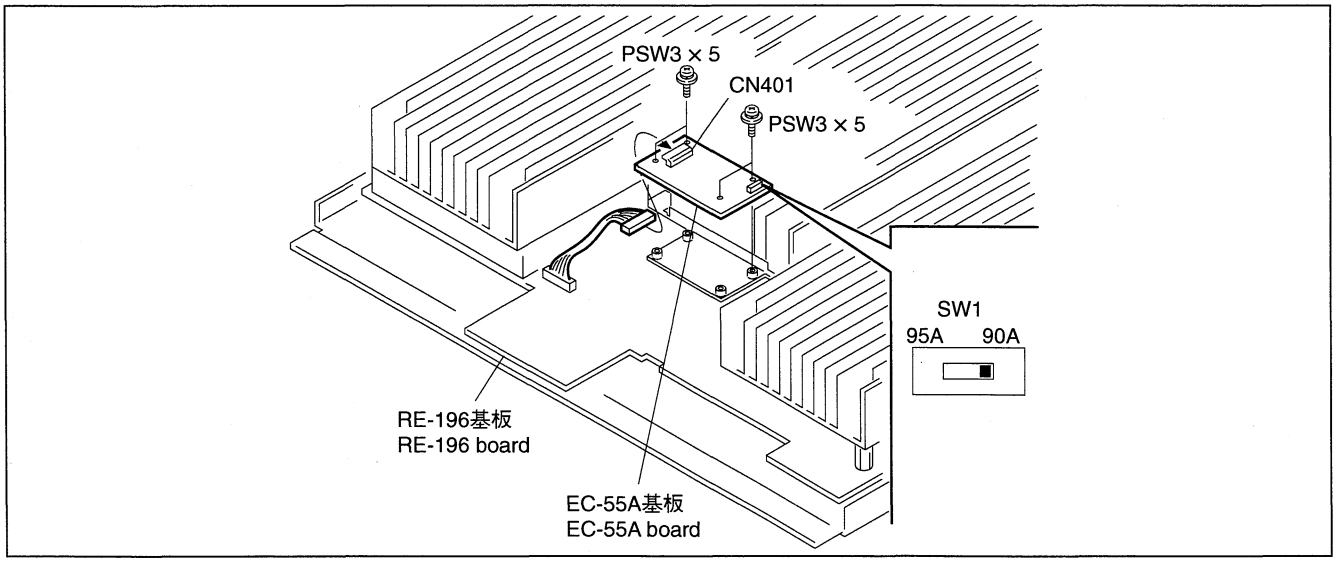

1-3-4. ファンの交換


フロント側のファンの交換

1. フロントパネルを取り外す。
   (1-3-2項「フロントパネル」参照)
2. ネジ4本を外し,ファンをフロントパネルから取り外す。

1-3-4. Replacement of Fans

Replacement of fan on the front side

1. Remove the front panel.
   (Refer to "Front panel" in Section 1-3-2.)
2. Remove the four screws and remove the fan from the front panel.

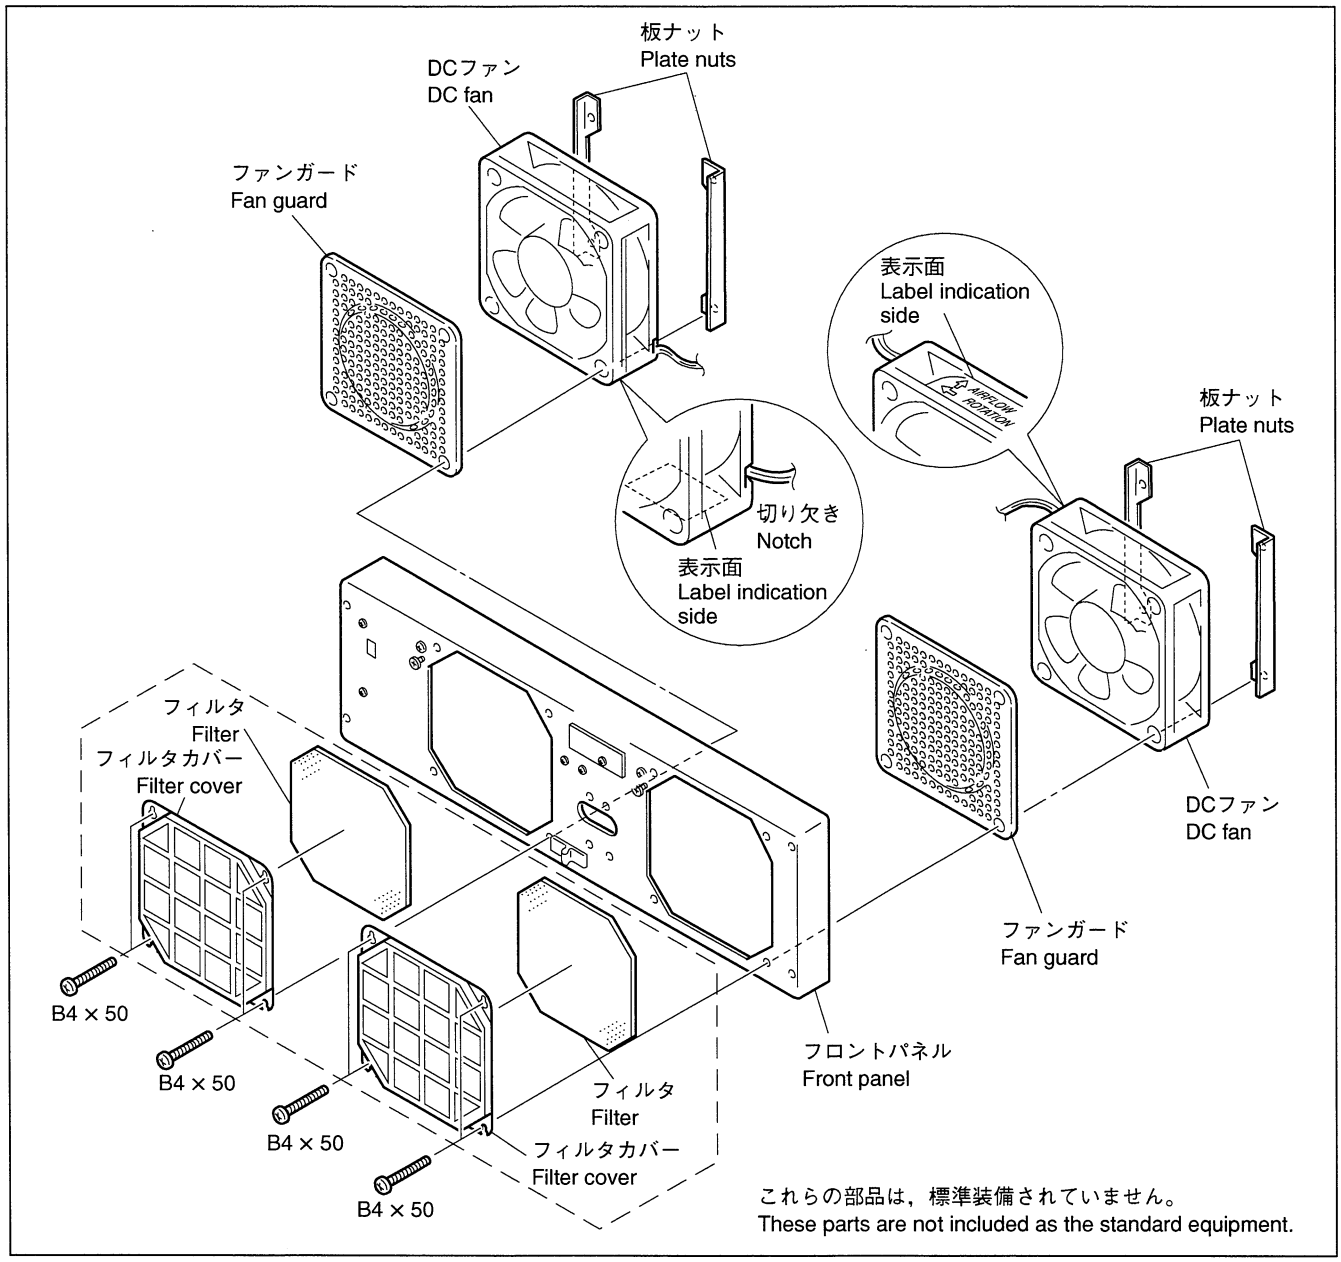

3. 取り外しの逆の手順で新しいファンを取り付ける。
   注意
   ファンを取り付けるときは,送風方向に注意してください。


3. Install a new fan in the reverse order of removal.
   Note
   When installing the fan, take care the direction of airflow.

リア側のファンの交換

1. 天板と側板を止めているネジ10本を外す。
2. ネジ8本を外し，天板を少し持ち上げながらリアパネルを外す。
3. RE-196基板上のコネクタ11個 (CN207 ～ CN217) を外す。
4. ネジ (B4 × 50) 3本およびナット3個を外し，ファンガードを外す。
5. ネジ (PSW3 × 5) を外し，ファンカバーとファンを取り外す。

Replacement of fan on the rear side

1. Remove the ten screws securing the top plate and the side panels.
2. Remove the eight screws, and remove the rear panel while lifting up gently the top plate.
3. Disconnect the 11 connectors (CN207 through CN217) on the RE-196 board.
4. Remove the three screws (B4 × 50) and the three nuts, then remove the fan guard.
5. Remove the screw (PSW3 × 5), and remove the fan cover and the fan.

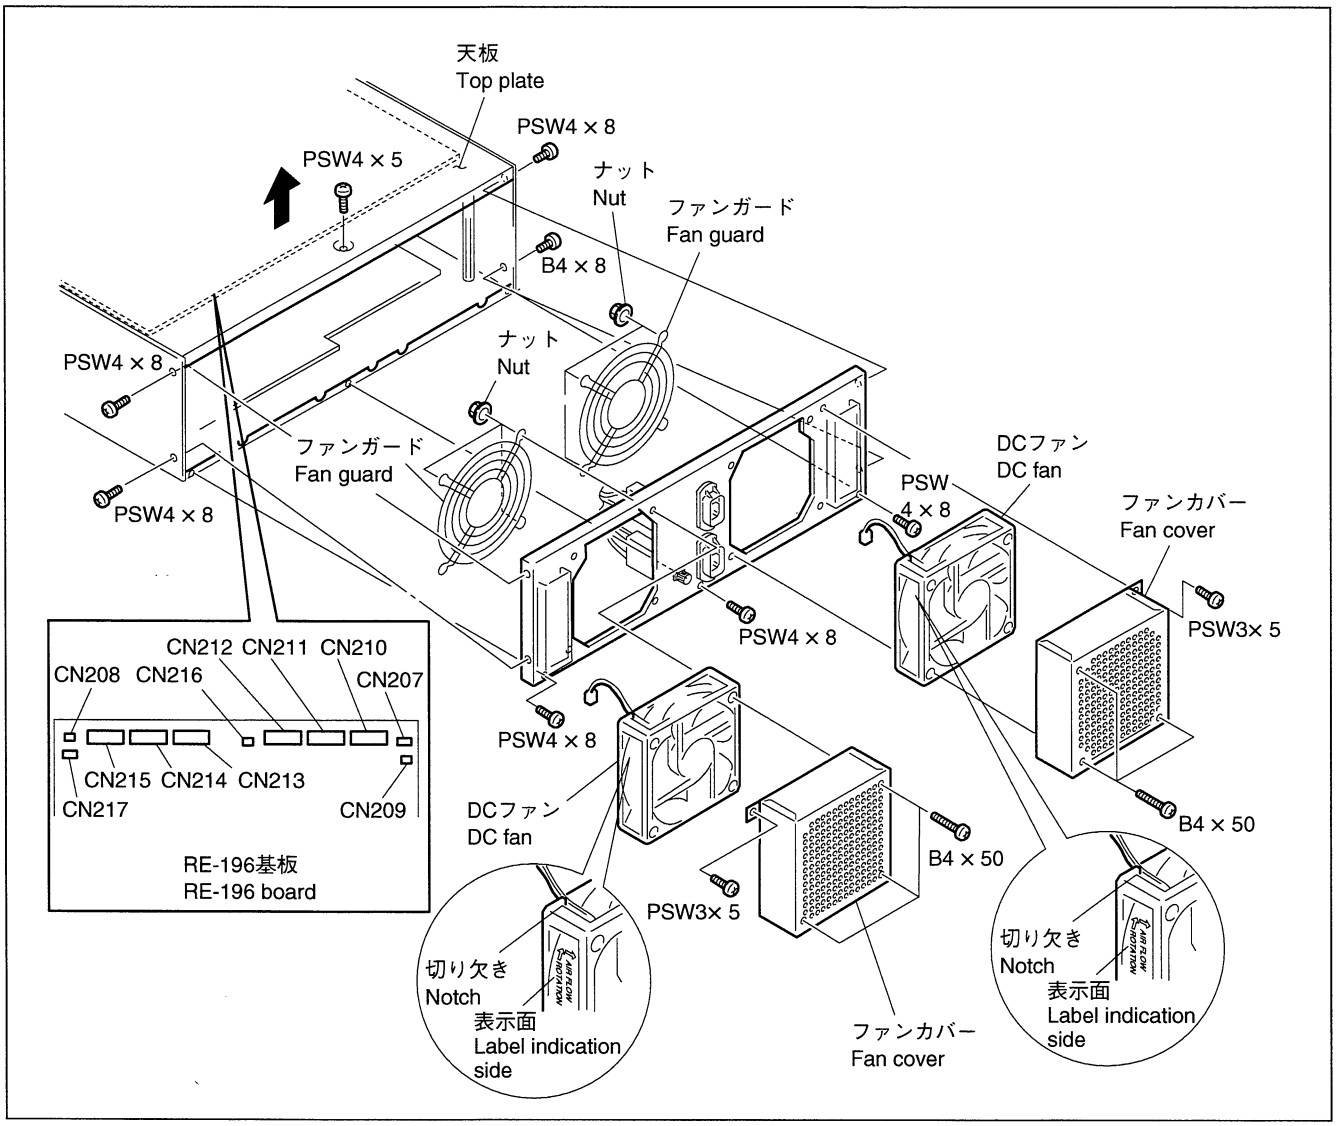

6. 手順1～5の逆の手順でファンを取り付ける。

注意

ファンを取り付けるときは，送風方向に注意してください。

6. Install a new fan in the reverse order of steps 1 through 5.

Note

When installing the fan, take care the direction of airflow.

1-3-5. パワーモジュールの交換


RE-194 基板

1. 天板を取り外す。(1-3-2項の「天板」参照)
2. ネジ2本を外し，ヒートシンクからアース線を外す。
3. RE-194基板のコネクタ (CN101～ CN104) からハーネスを外す。

1-3-5. Replacement of Power Module


RE-194 board

1. Remove the top plate. (Refer to "Top plate" in Section 1-3-2.)
2. Remove the two screws and remove the ground wire from the heat sink.
3. Disconnect the harnesses from the connectors (CN101 to CN104) on the RE-194 board.

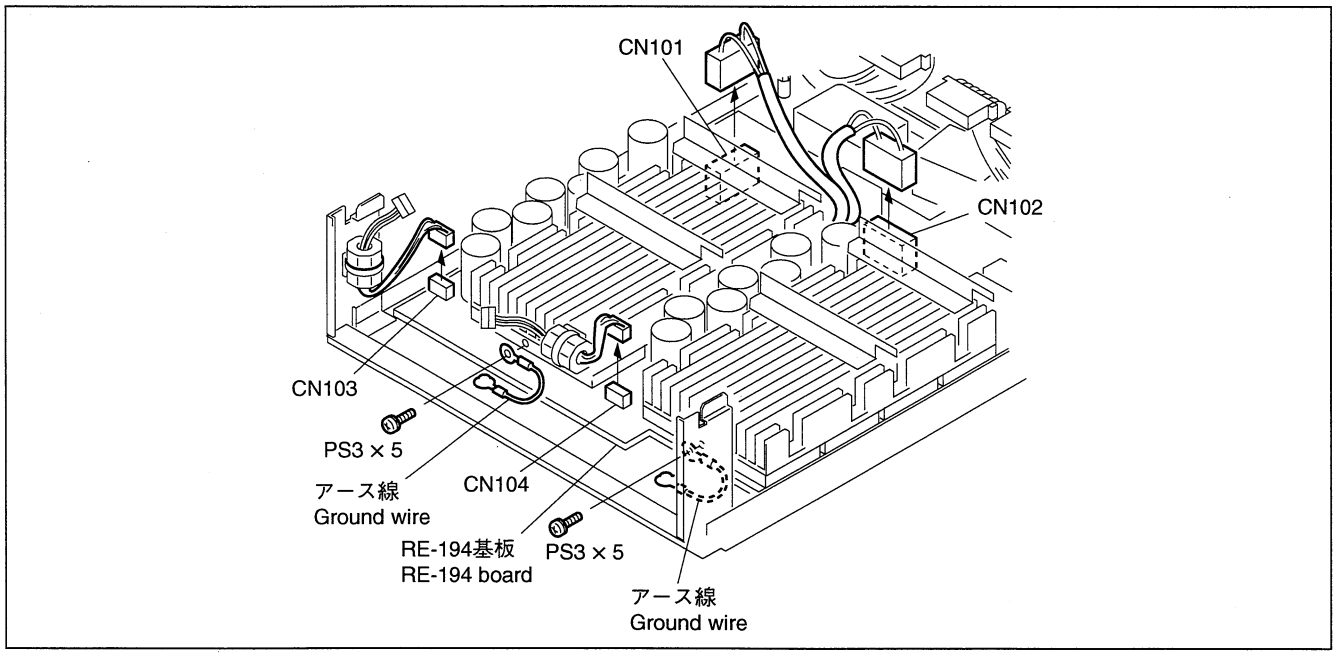


4. ネジ16本を外し，ヒートシンクを取り外す。

4. Remove the sixteen screws and remove the heat sink.

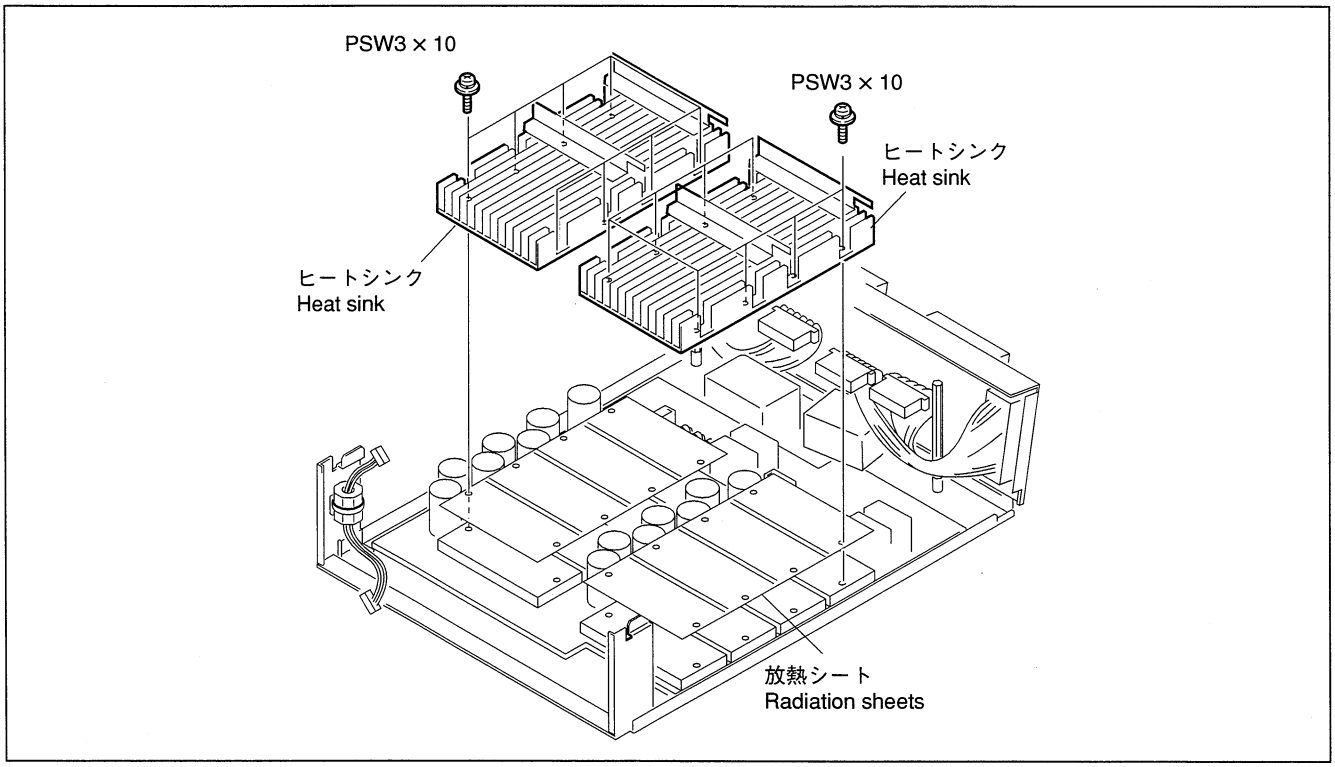


5. ネジ 12 本を外し，RE-194 基板を矢印方向に取り外す。

5. Remove the twelve screws and remove the RE-194 board in the direction of the arrow.

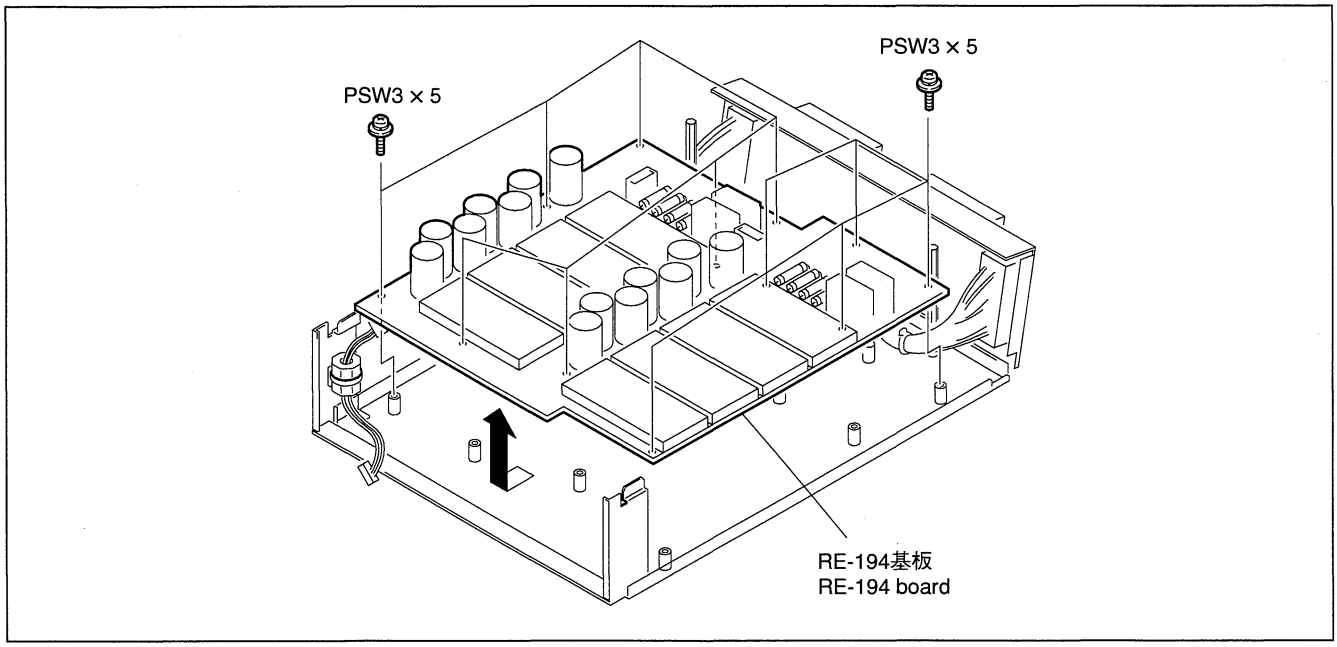

6. RE-194基板からパワーモジュールを固定しているはんだを外す。
7. ネジ 2 本を外し，パワーモジュールを取り外す。

6. Remove the solders that secure the power module from the RE-194 board.
7. Remove the two screws and remove the power module.

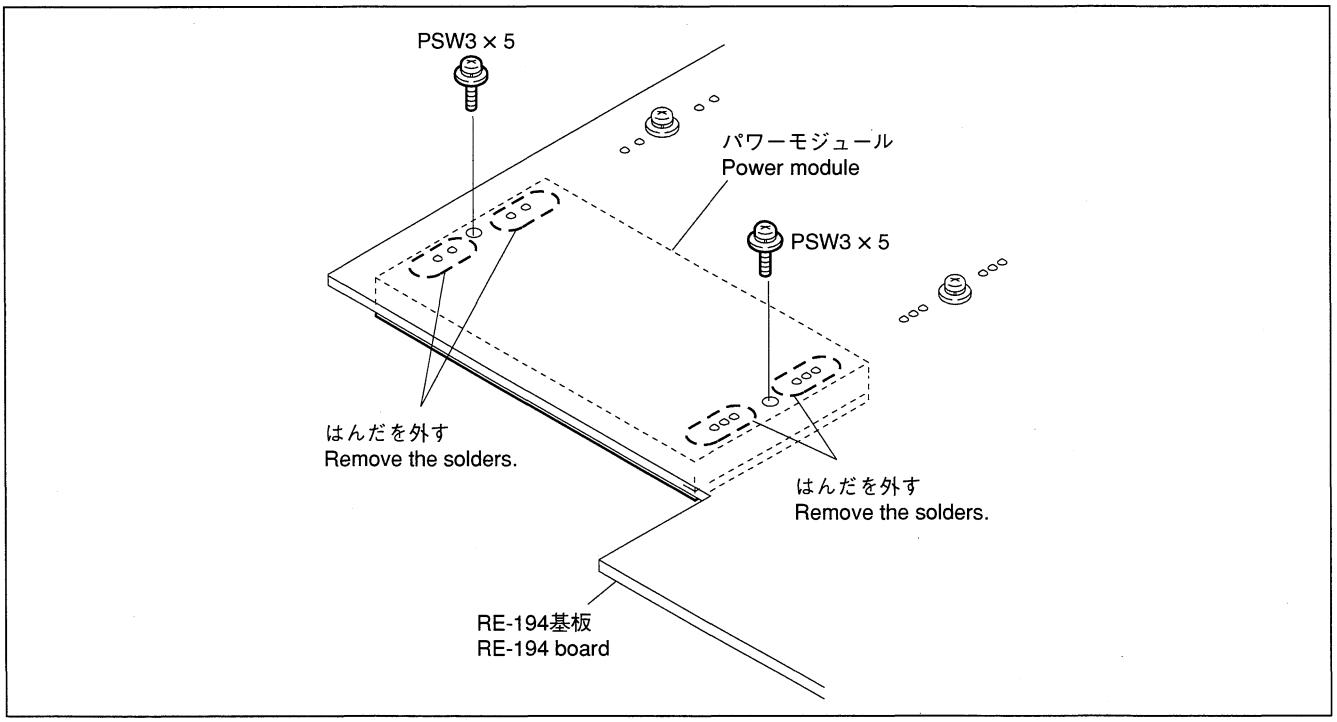

8. 取り外しの逆の手順で新しいパワーモジュールを取り付ける。


8. Install a new power module in the reverse order of the steps of removal.

RE-196 基板

1. 天板を取り外す。(1-3-2項 参照)
2. 天板からネジ9本を外す。


RE-196 Board

1. Remove the top plate. (Refer to Section 1-3-2.)
2. Remove the nine screws from the top plate.

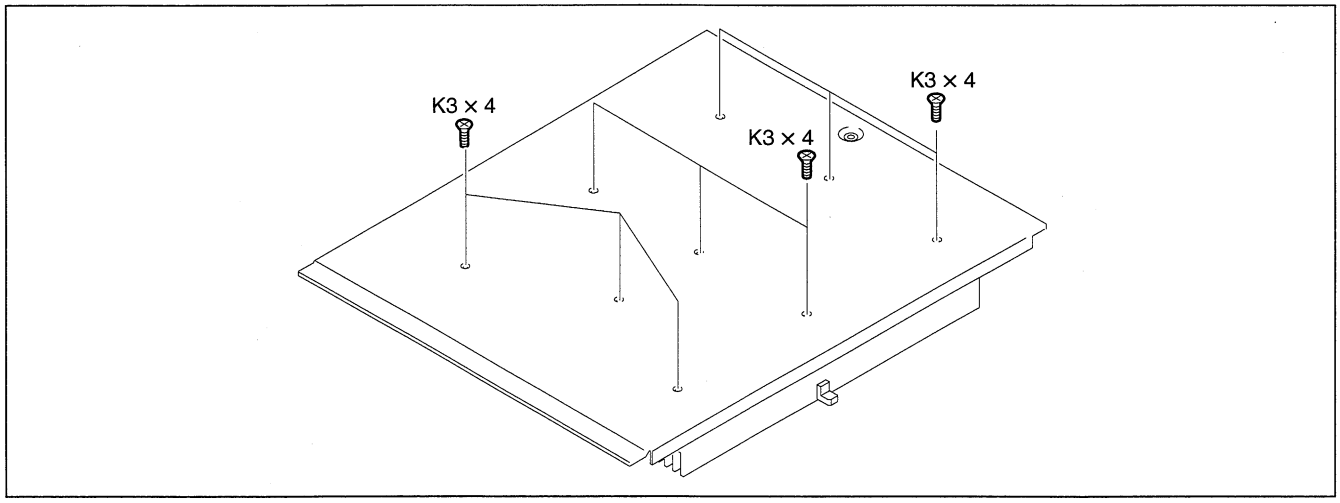


3. EC-55 基板のコネクタ (CN401) からハーネスを外す。
4. ネジ2本を外し，EC-55 基板を取り外す。

3. Disconnect the harness from the connector (CN401) on the EC-55 board.
4. Remove the two screws and remove the EC-55 board.

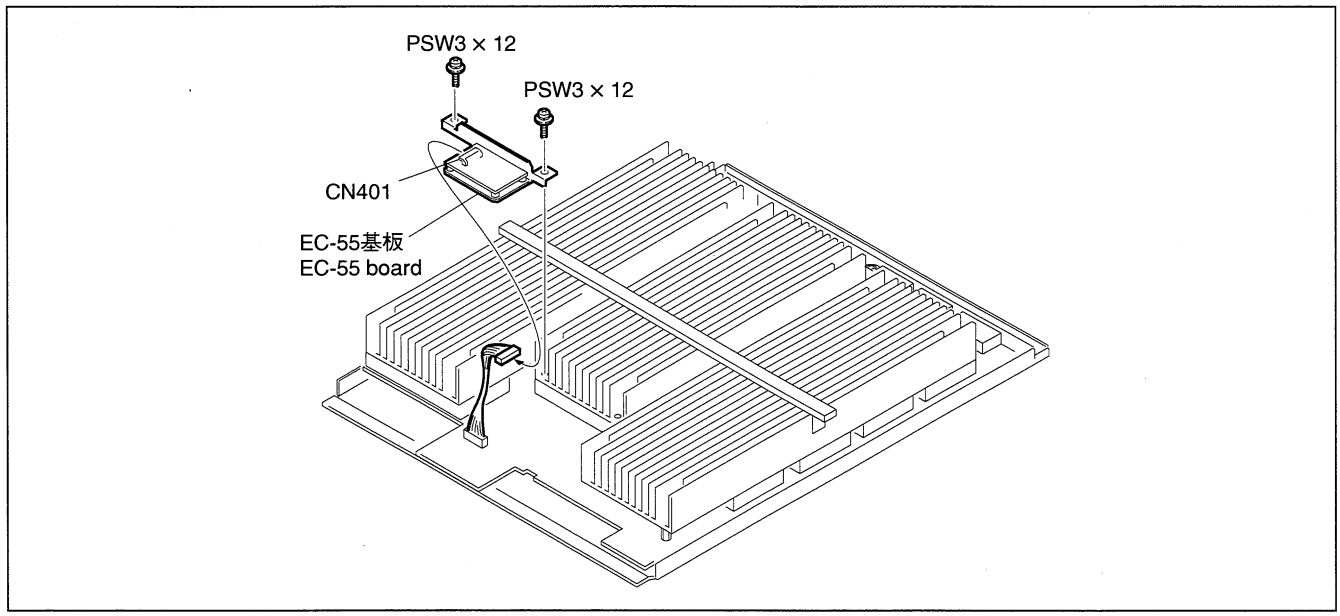


5. ネジ (PSW3 × 5) 2本を外し，ヒートシンクガードを取り外す。
6. ネジ (PSW3 × 10) 43本を外し，ヒートシンクを取り外す。

5. Remove the two screws (PSW3 × 5) and remove the heat sink guard.
6. Remove the forty-three screws (PSW3 × 10) and remove the heat sinks.

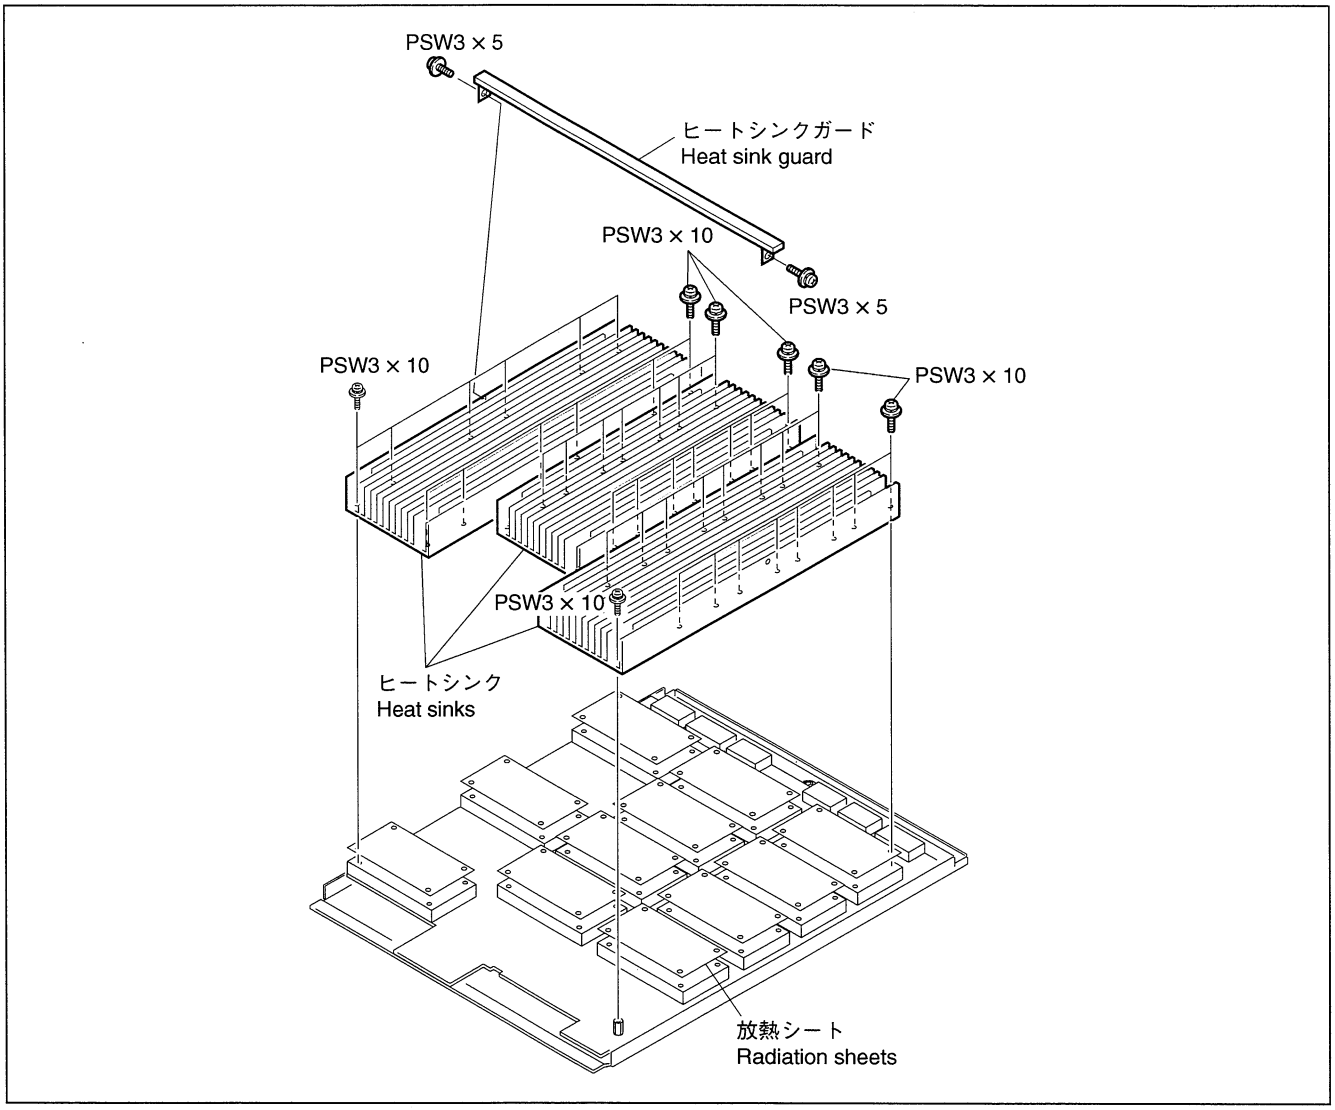


7. ネジ9本を外し，天板から RE-196 基板を取り外す。

7. Remove the nine screws and remove the RE-196 board from the top plate.

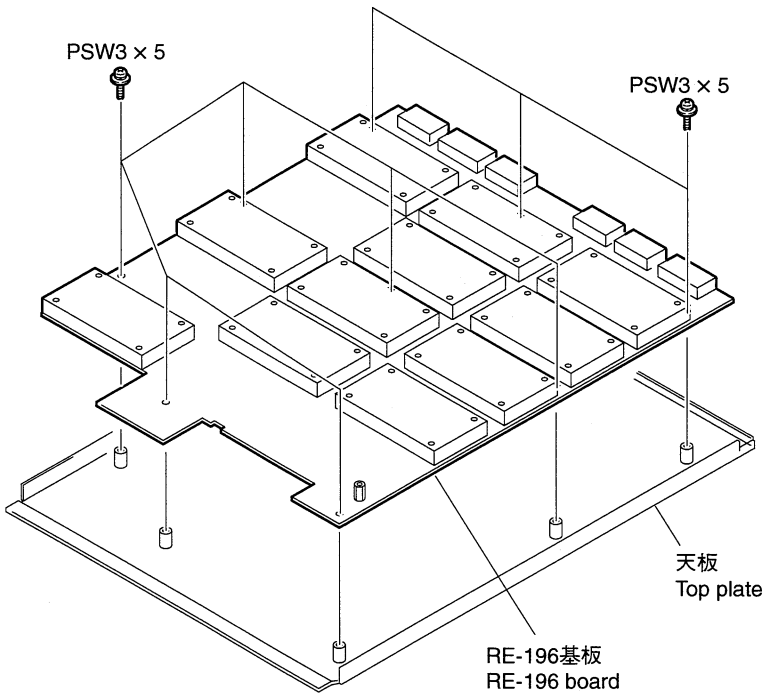


8. ネジ3本を外す。

8. Remove the three screws.

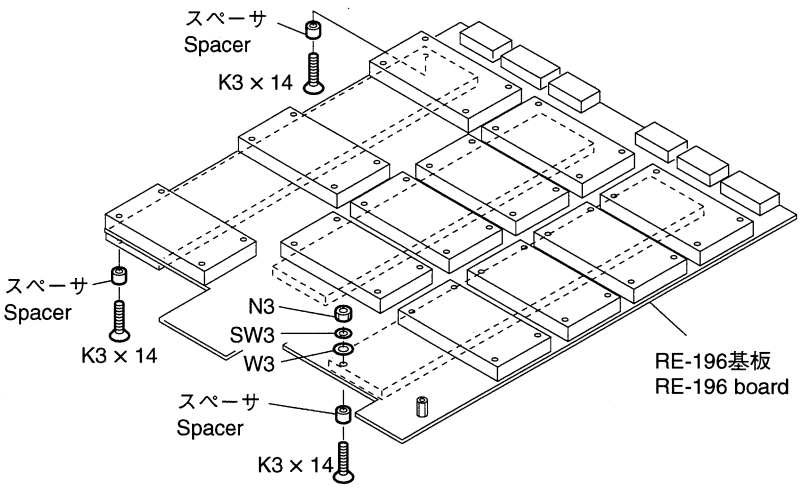


9. ネジ18本を外し，ヒートシンクを取り外す。

9. Remove the eighteen screws and remove the heat sinks.

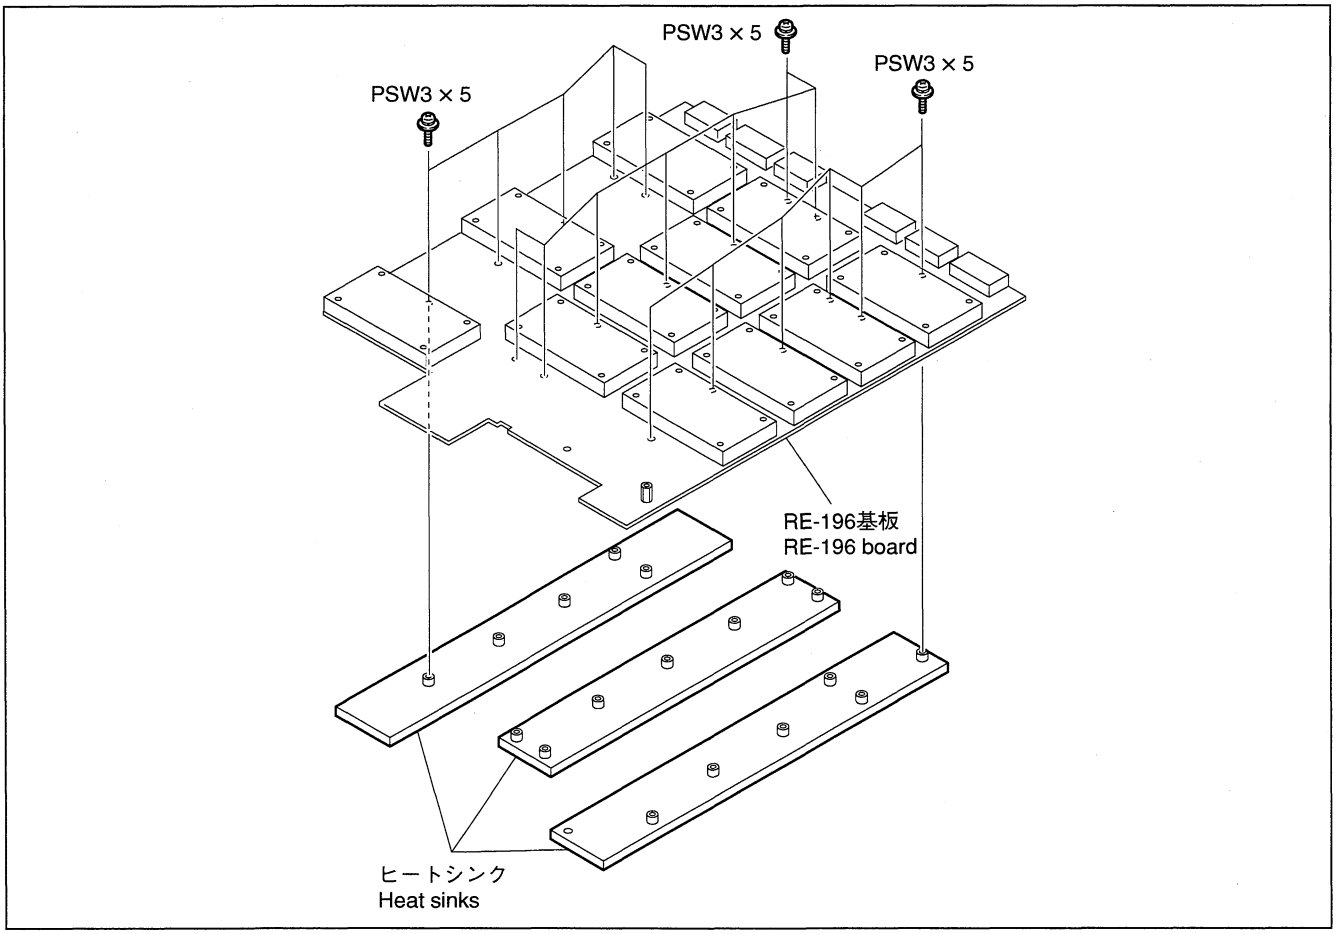

10. RE-196基板からパワーモジュールを固定しているはんだを外す。
11. ネジ4本を外し，パワーモジュールを取り外す。

10. Remove the solders that secure the power module from the RE-196 board.
11. Remove the four screws and remove the power module.

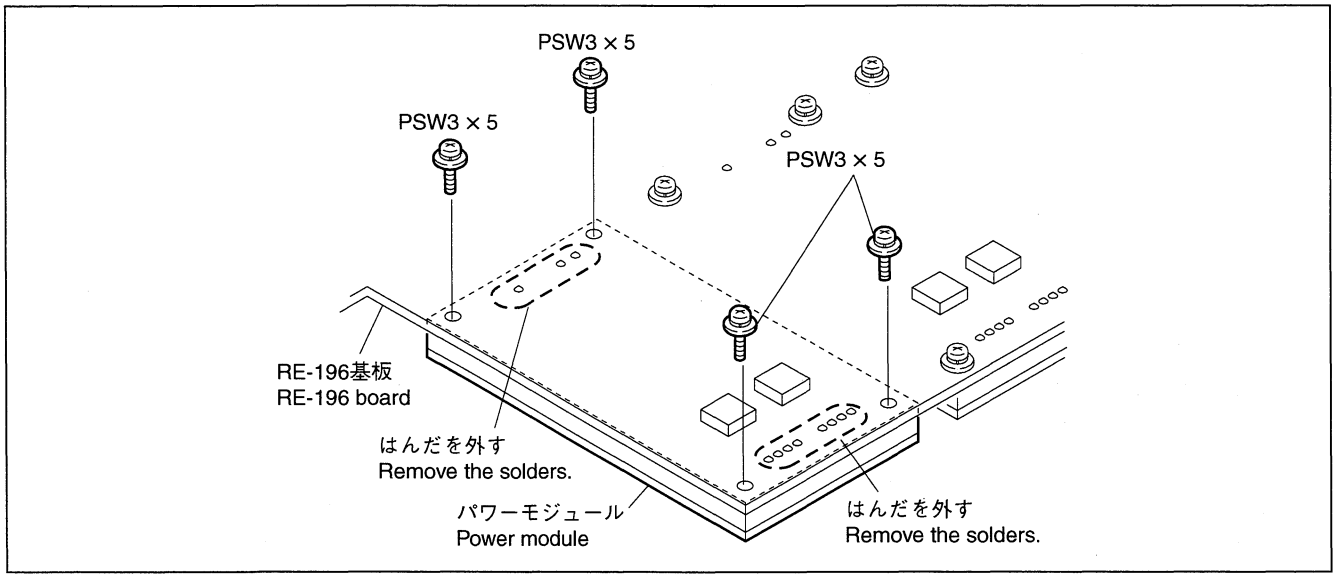

12. 取り外しの逆の手順で新しいパワーモジュールを取り付ける。

12. Install a new power module in the reverse order of the steps of removal.

1-3-6. ヒューズの交換

⚠警告
RE-194 基板および RE-196 基板にはヒューズが搭載されています。機器に異常が生じて，過大電流がながれたときに溶断します。
交換するヒューズは，下記に示す指定部品を使用してください。また，ヒューズの交換は，本機内部の原因を取り除いてから行ってください。

交換部品

RE-194 基板
PS101 ～ PS108
ヒューズ 10 A, 250 V
ソニー部品番号 : ⚠1-533-714-11

RE-196 基板
F202 ～ F205, F207, F208, F210, F212 ～ F214
ヒューズ 3 A, 250 V
ソニー部品番号 : ⚠1-533-708-11


1-3-6. Replacement of Fuses

WARNING
Total 18 fuses are mounted on the RE-194 and RE-196 boards. If a trouble occurs on the unit by flowing the overcurrent, any fuse will blow. The fuses should be replaced with the following parts after removing foreign matter.


Replacement Parts

RE-194 board
PS101 to PS108
FUSE 10 A, 250 V
Sony part number : ⚠ 1-533-714-11

RE-196 board
F202 to F205, F207, F208, F210, F212 to F214
FUSE 3 A, 250 V
Sony part number : ⚠ 1-533-708-11

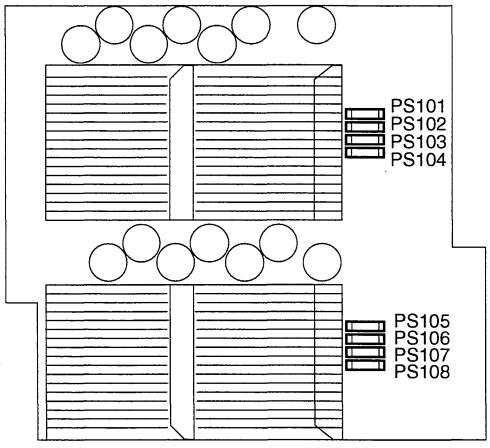

RE-194 (A side)

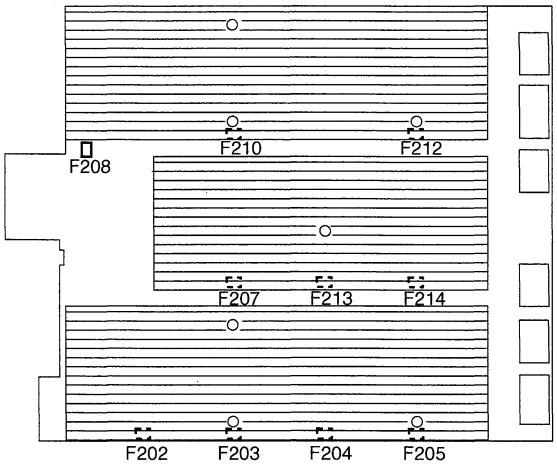

RE-196 (A side)

1-4. BKDS-70xx 電源部の交換 (Control Panel)

1-4-1. 電源ユニットの取り外し

⚠警告
電源ユニットの取り外しは，電源を切った後，5分以上経過するのを待ってから行ってください。
電源を切った後すぐに電源ユニットの取り外しを行うと，感電する恐れがあります。


1. パネルを開く。(Maintenance Manual Part1 1-2-1項 参照)
2. 内部の電源スイッチをOFFする。(Maintenance Manual Part1 1-2-2 項 参照)
3. 電源ユニットを固定しているネジ２本を外す。
4. 電源ユニット両側のレバーを矢印方向に倒す。
5. 電源ユニットを矢印方向に持ち上げて取り外す。

1-4. BKDS-70xx (Control Panel) Power Supply Block Replacement

1-4-1. Removal of Power Unit

WARNING
Allow for more than five minutes interval after turning the power off, remove the power unit.
To avoid shock hazards, never remove the power unit just after turning the power off.

1. Open the panel. (Refer to Section 1-2-1 in the maintenance manual part 1.)
2. Turn off the power switch in the control panel. (Refer to Section 1-2-2 in the maintenance manual part 1.)
3. Remove the two screws securing the power unit.
4. Tilt the levers at both sides of the power unit in the direction of the arrow.
5. Lift up the power unit in the direction of the arrow and remove it.

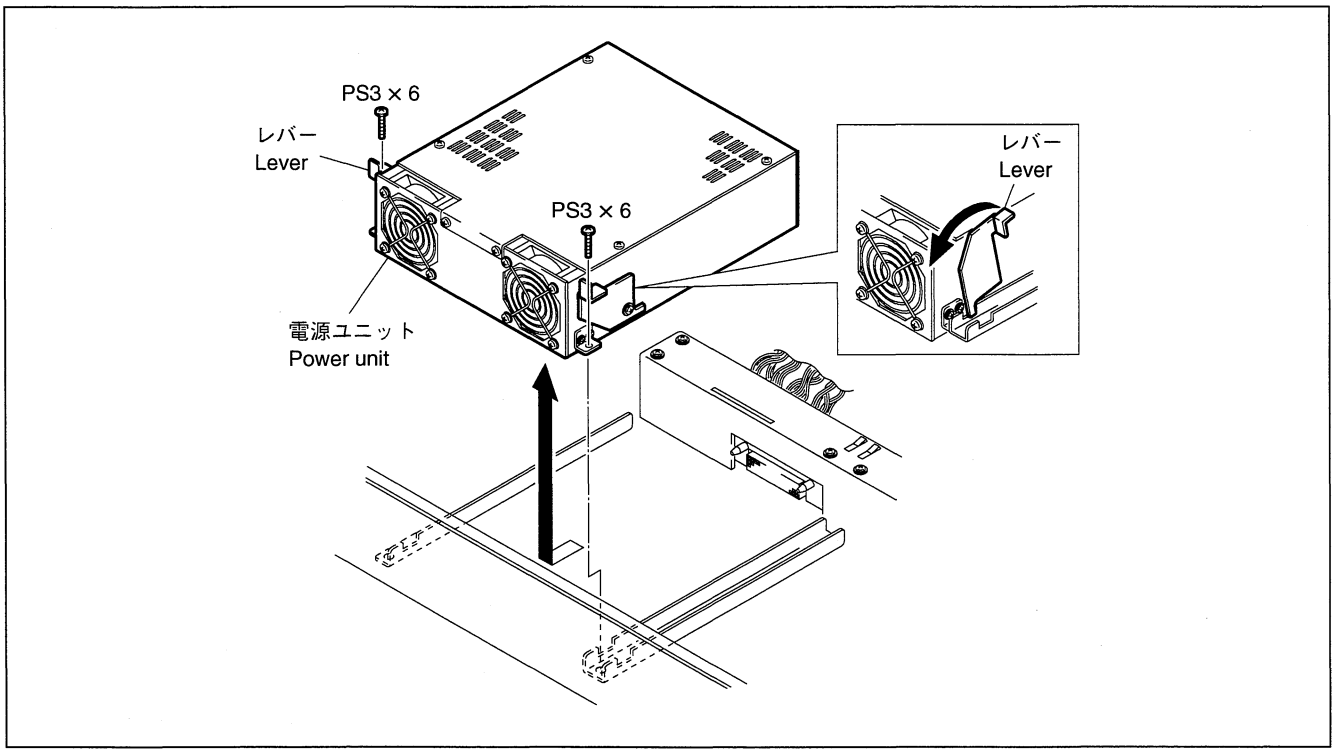

6. 手順１～５の逆の手順で電源ユニットを取り付ける。


6. Install the power unit in the reverse order of the steps 1 through 5.

1-4-2. ファンの交換

1. パネルを開く。(Maintenance Manual Part1 1-2-1項 参照)
2. 内部の電源スイッチを OFF する。
3. 電源ユニットを取り外す。(「1-4-1. 電源ユニットの取り外し」参照)
4. ネジ 6 本を外し，電源カバーを取り外す。


1-4-2. Replacement of Fans

1. Open the panel. (Refer to Section 1-2-1 in the maintenance manual part 1.)
2. Turn off the power switch in the control panel.
3. Remove the power unit. (Refer to "1-4-1. Removal of Power Unit" in this section.)
4. Remove the six screws and the power unit cover.

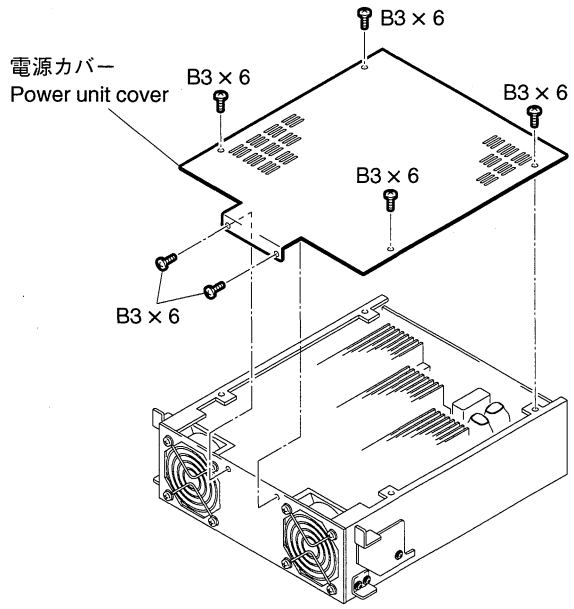

5. 交換するファンを固定しているネジ4本を外す。
6. RE-112基板上のコネクタ1個 (右側 : CN5，左側 : CN6) を外し，ファンを取り外す。

5. Remove the four screws securing the fan to replace.
6. Disconnect the one connector (Right side: CN5 or Left side: CN6) on the RE-112 board, and then remove the fan.

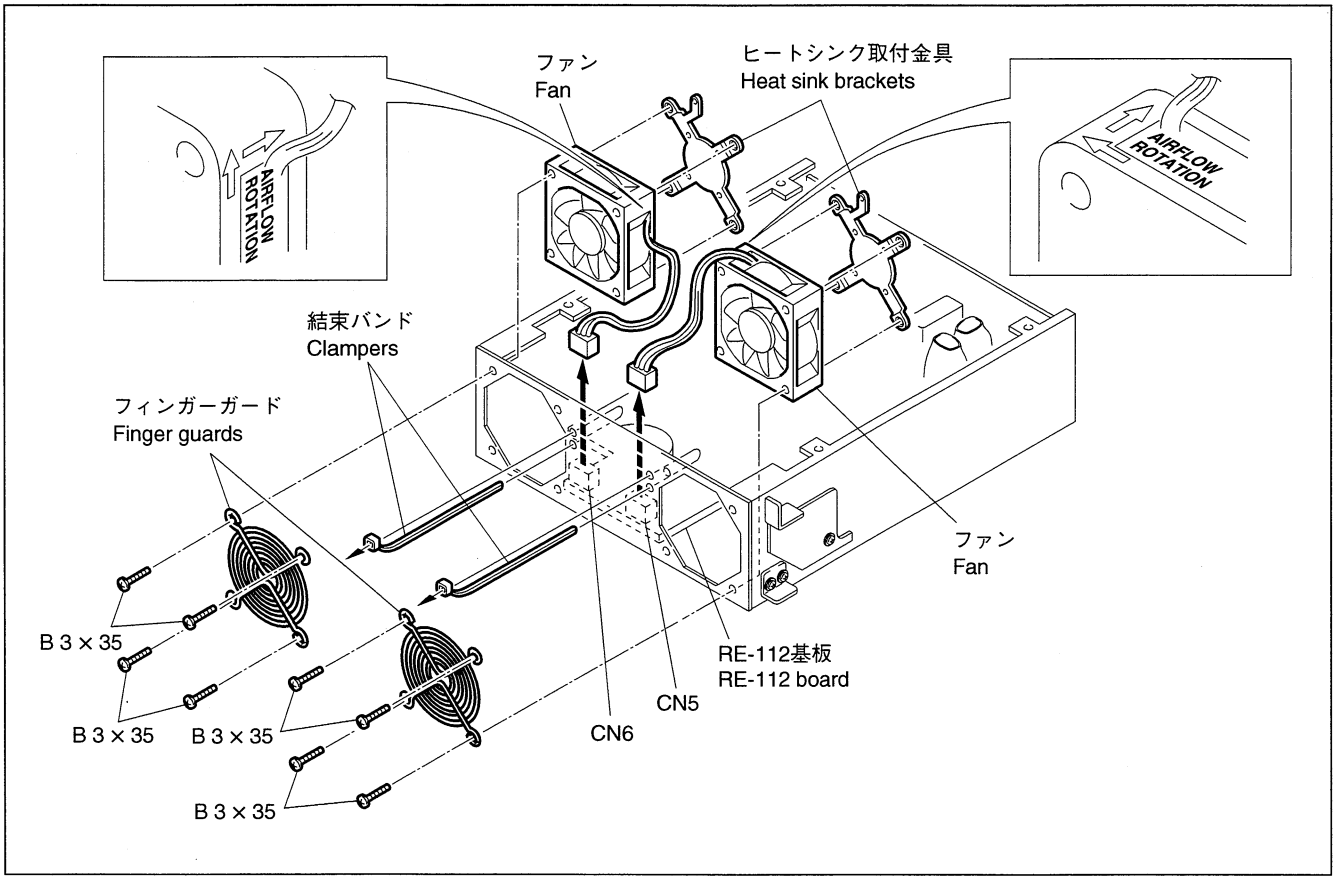

7. 手順1～6の逆の手順でファンを取り付ける。

注意

1. ファンを取り付けるときは，送風方向に注意して取り付けてください。
2. ファンを取り付けるときは，ファンのハーネスを結束バンドで固定してください。ハーネスをたるませておくと，ファンの回転時に引っかかる原因となります。

7. Install a new fan in the reverse order of the steps 1 through 6.

Notes


1. When installing the fan, take care the direction of airflow.
2. When installing the fan, secure the harness to the clamper. If loosening the harness, the harness causes that be caught in the fan when turning the fan.

1-4-3. パワーモジュールの交換

1. パネルを開く。(Maintenance Manual Part1 1-2-1項 参照)
2. 内部の電源スイッチを OFF する。
3. 電源ユニットを取り外す。(「1-4-1. 電源ユニットの取り外し」参照)
4. 電源カバーを取り外す。(「1-4-2. ファンの交換」手順 4 参照)
5. RE-112 基板上のコネクタ 2 個 (CN5, CN6) を外す。
6. ネジ 10 本を外し，RE-112 基板を取り外す。

1-4-3. Replacement of Power Modules

1. Open the panel. (Refer to Section 1-2-1 in the maintenance manual part 1.)
2. Turn off the power switch in the control panel.
3. Remove the power unit. (Refer to "1-4-1. Removal of Power Unit" in this section.)
4. Remove the power unit cover. (Refer to the step 4 of "1-4-2. Replacement of Fans" in this section.)
5. Disconnect the two connectors (CN5 and CN6) on the RE-112 board.
6. Remove the ten screws and the RE-112 board.

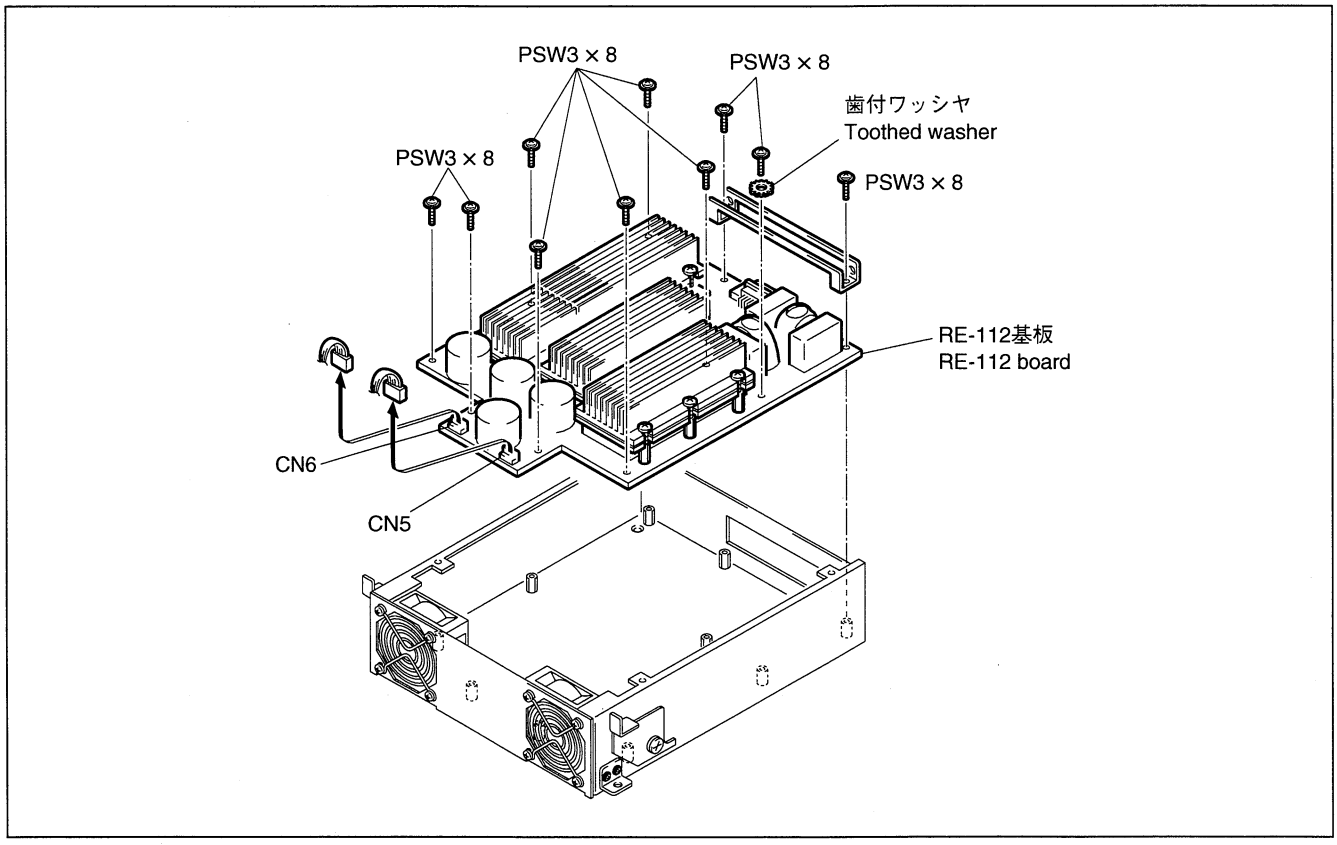

⚠注意


1. RE-112 基板の取り付け時に，歯付きワッシャを必ず取り付けてください。
2. RE-112 基板の交換時に，歯付きワッシャを紛失しないよう注意してください。

CAUTION

1. When installing the RE-112 board, be sure to install the one toothed washer with the one screw to secure it.
2. When replacing the RE-112 board, take care not to lose the one toothed washer.

7. 各ヒートシンクと放熱シートを RE-112 基板に固定しているネジを外す。
   CP1, 3, 4 の場合 ： ネジ各 6 本
   CP2 の場合 ： ネジ 4 本
8. 交換するパワーモジュールのはんだ付けを外し, 新しいパワーモジュールに交換する。
9. ヒートシンクと放熱シートを, 手順 7 で外したネジで RE-112 基板に取り付ける。
10. 新しいパワーモジュールをはんだ付けする。

7. Remove the screws securing each heat sink and radiation sheet to the RE-112 board.
   For CP1, 3 or 4 : six screws
   For CP2 : four screws
8. Desolder the power module to replace, and then replace it with a new one.
9. Secure the heat sink and radiation sheet to the RE-112 board by the screws removed in the step 7.
10. Solder a new power module.

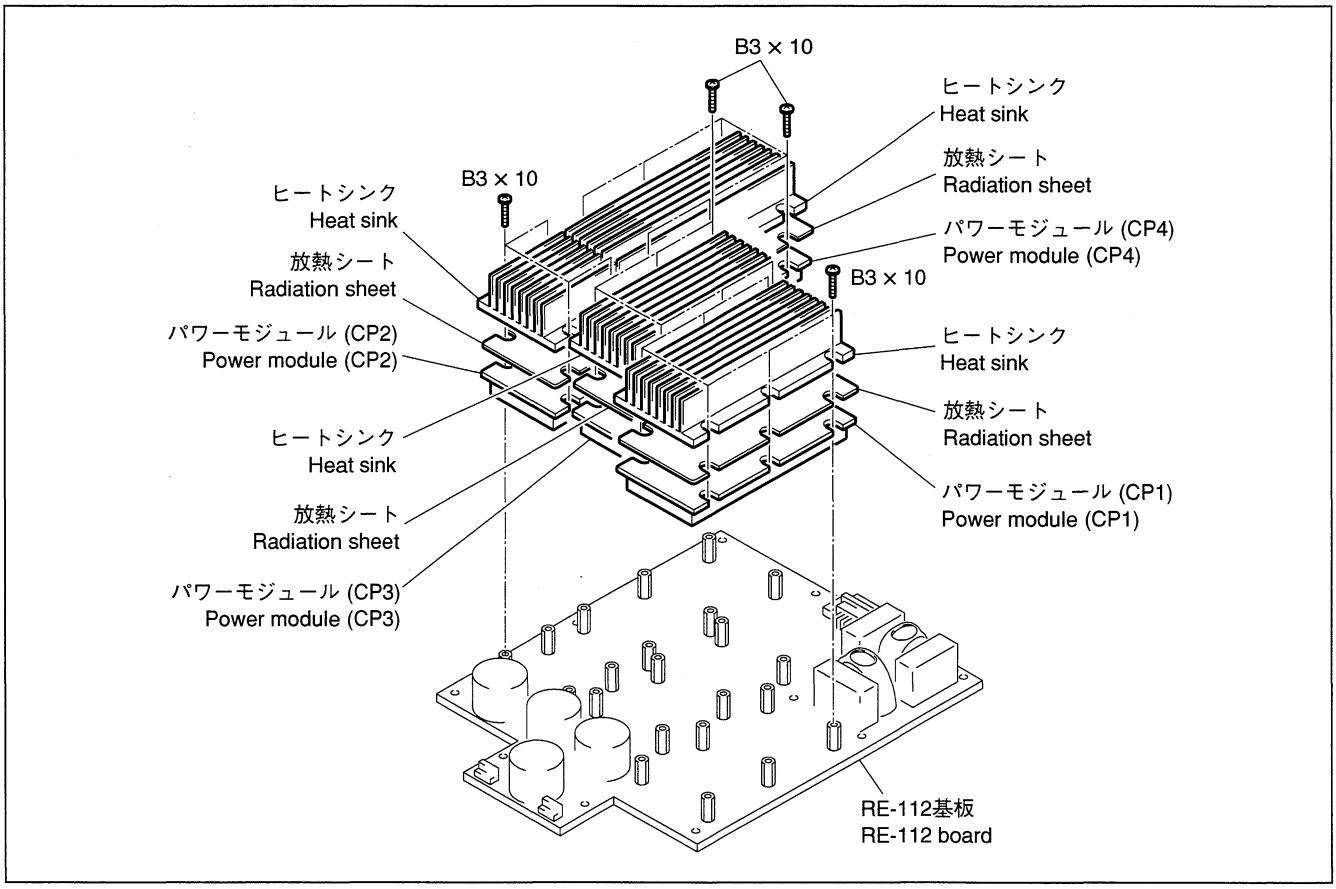

11. 手順1～6の逆の手順で組み立てる。

11. Assemble the parts in the reverse order of the steps 1 through 6.

1-4-4. ヒューズの交換

⚠警告

RE-112基板にはヒューズが搭載されています。機器に異常が生じて，過大電流が流れたときに溶断します。交換するヒューズは，下記に示す指定部品を使用してください。また，ヒューズの交換は，本機内部の原因を取り除いてから行ってください。

交換部品

RE-112 基板

F1 ヒューズ 6.3 A, 250 V
　　ソニー部品番号： ⚠1-576-233-41
F2 ヒューズ 3 A, 250 V
　　ソニー部品番号： ⚠1-533-708-11
F3 ヒューズ 3 A, 250 V
　　ソニー部品番号： ⚠1-533-708-11
F4 ヒューズ 3 A, 250 V
　　ソニー部品番号： ⚠1-533-708-11

1-4-4. Replacement of Fuses


WARNING

The four fuses are mounted on the RE-112 board. If a trouble occurs on the unit by flowing the overcurrent, any fuse will blow. The fuses should be replaced with the following parts after removing foreign matter.

Replacement Parts

RE-112 board

F1 FUSE 6.3 A, 250 V
　　Sony part number： ⚠1-576-233-41
F2 FUSE 3 A, 250 V
　　Sony part number： ⚠1-533-708-11
F3 FUSE 3 A, 250 V
　　Sony part number： ⚠1-533-708-11
F4 FUSE 3 A, 250 V
　　Sony part number： ⚠1-533-708-11

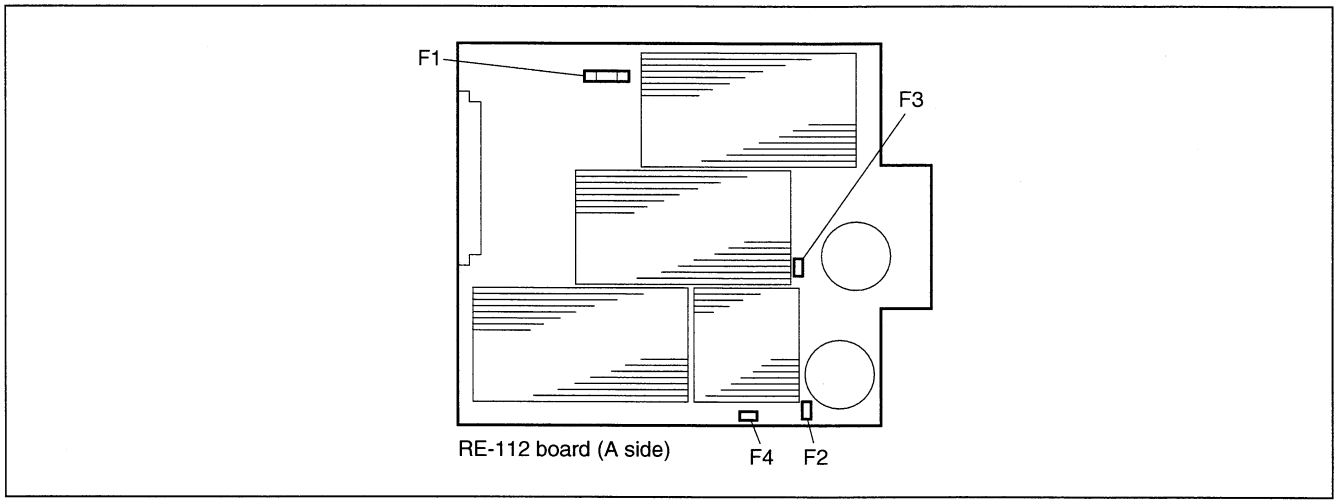

Section 2
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE — **Page or ID No.**

11E2FA-9 ..... DA001-01
1N6263 ..... DC001-01
1S2835-T1 ..... DC001-02
1S2836 ..... DC001-02
1SS123-T1 ..... DC001-01
1SS184 ..... DC001-03
1SS184-TE85L DC001-03
1SS226 ..... DC001-01
1SS88 ..... DA001-01
1SV271-TPH3 ..... DC008-02

BAS16-215 ..... DC001-06

D1FS4A-TA DC007-01
DA204U DC001-01
DA204UT106 ..... DC001-01
DF30PC3M-4102 ..... DM019-01

HSU276TRF DC008-02

MBRS130LT3 ..... DC013-01

RB425D DC001-03
RB425D-T146 ..... DC001-03
RLS-73 ..... DC006-01
RLS-73-TE-11 ..... DC006-01

S20WB60 ..... DR019-01

UDZ-TE-17-2.7B DC008-04
UDZ-TE-17-4.3B DC008-04

LED — **Page or ID No.**

AY1101W-88 ..... LC003-01
AY1101W-88-TR LC003-01

PG1102W LC003-01
PG1102W-TR LC003-01

TLG124A LR002-01

VR1101W-TR LC003-01

TRANSISTOR — **Page or ID No.**

2SA1577-QR TC001-01
2SA1577-T106-QR TC001-01
2SC1623 ..... TC001-02
2SC1623-T1L7 ..... TC001-02
2SC4116-GL TC001-02
2SC4116GL-TE85L TC001-02

DTA114EKA-T146 ..... TC001-04
DTC123YUA-T106 ..... TC001-03

SI4410DY-T1-REVA TC012-06
SI9410DY TC012-07
SI9410DY-T1 ..... TC012-07

Index

IC	Page or ID No.
74AC240SJ	TC74HC240P
74AC240SJX	TC74HC240P
74LCX00MTCX	TC74HC00P
74LCX04MTCX	TC74HC04P
74LCX08MTCX	TC74HC08P
74LCX125SJX	MC74HC125N
74LCX157MTCX	TC74HC157P
74LCX16244MTDX	IDT74FCT16244ATPV
74LCX16374MTDX	SN74ABT16374DL
74LCX32MTCX	TC74HC32P
74LCX541MTCX	MC74HC541N
74LCX574MTCX	TC74HC574P
74LCX74MTCX	TC74HC74P
74LCX86MTCX	TC74HC86P
74LVX3L384QSCX	QS74QST3384SO
AM26LS30PC	AM26LS30PC
AM26LS32ACN	AM26LS32PC
AM27C256-150DC	MBM27C256A
AM27C4096-120JC	HN27C4096ACC
AT27C4096-12JI	2-4
AT28C64B-15TC	AT28C64B-15TC
AV9154A-27CS16	AV9154A-27CS16
CAT93C66K-LE10	CAT35C104HP
CGS2534TVX	CGS2534TVX
CGS2535TVX	CGS2535TVX
CXB1345N-T4	CXB1345N-T4
CXD1095BQ	CXD1095Q
CXD8052Q	CXD8052Q
CXD8053Q	CXD8053Q
CXD8058Q	CXD8058Q
CXD8060Q	CXD8060Q
CXD8061	CXD8061Q
CXD8841Q	CXD8841Q
CXD8848AQ	CXD8848Q
CXD8893J	CXD8893J
CXD8894Q	CXD8894Q
CXD8895Q	CXD8062Q
CXD8898AQ	CXD8898Q
CXD8898Q	CXD8898Q
CXD8899J	CXD8899J
CXD8900J	CXD8900J
CXD8901Q	CXD8056Q
CXD9000CR	CXD9000CR
CXD9022R	CXD9022R
CXD9024Q	CXD9024Q
CXD9057R	CXD9057R
CXD9144R	CXD9000CR
CXG8003Q	CXG8003Q
CXG8004Q	CXG8004Q
CY7C133-55JC	CY7C133-55JC
CY7C136-55NC	CY7C136-55NC
CY7C263-35PC	CY7C263-35WC
CY7C4221-25AC	CY7C4221-25AC
DP83932CVF-33	DP83932BVF-25
DS26C32ATM	DS26C32ACN
DS26C32ATMX	DS26C32ACN
DS3695ATM	DS3695ATM
DS3695ATMX	DS3695ATM
DS96F174CJ	DS96F174CJ
EL2090CM	EL2090CM
EPC1LC20	EPC1LC20
EPF10K40RC208-3	EPF10K40RC208-3
EPF10K40RC208-3(04)	EPF10K40RC208-3
EPM7032LC44-6	EPM7032LC44-3
EPM7032LC44-7	EPM7032LC44-3
EPM7032SLC44-6(05)	EPM7032LC44-3
EPM7064LC68-10(05)	EPM7064LC68-15
EPM7064LC68-15	EPM7064LC68-15
EPM7064SLC44-7	2-4
EPM7128ELC84-15	EPM7128LC84-15
EPM7128SLC84-15(05)	EPM7128LC84-15
EPM7128SQC100-10	EPM7128EQC100-12
EPM7128SQC100-10(05)	EPM7128EQC100-12
EPM7192SQC160-10	EPM7192SQC160-15
GS4982-CKA	2-5
HD647180X	HD647180X
HD647180XRFS6	HD647180X
HM530281-20	HM530281-25
HM530281RTT-20	HM530281-25
HM628512ALTT-5SLZ	HM628512LP-7
HM628512BLTT-5SLZ	HM628512LP-7
HN27C4096ACC-10	HN27C4096ACC
IDT7164S20Y-TL	IDT7164S25Y
IDT74FCT162245CTPA	IDT74FCT16245ATPV-TR
IDT74FCT162260ETPA	IDT74FCT162260ETPA
IDT74FCT162374ATPV	SN74ABT16374DL
IDT74FCT162374ETPA-TL	SN74ABT16374DL
IDT74FCT162501ETPA	IDT74FCT162501ETPA
IDT74FCT162841ETPA	IDT74FCT162841ETPA
IDT74FCT16374ETPA-TL	SN74ABT16374DL
IDT74FCT163CTSO-TL	TC74HC163P
IDT74FCT574CTPY-TL	TC74HC574P
IDT74FCT574DTPY-TL	TC74HC574P
IDT74FCT821ATPY-TL	V74ACT821
IDT74FCT827CTSO-TL	V74ACT827PS
IDT74FST3390Q	IDT74FST3390Q
IDT79RV4700-150G	IDT79RV4700-150G
IVA-14208-TR1	IVA-14208-TR1
LM2931CMX	LM2931CMX
LM319M	UPC319C
LMC6484IMX	XRA10324AF
LT1193CS8	LT1193CS8
LTC1266CS-E2	LTC1266CS-E2
M27C256B-10F1-(K)	2-5
MAX3241CAI-TE2	MAX3241CAI-TE2
MAX693ACSE	MAX691CPE
MAX708CSA	MAX708CSA
MAX708SCSA	MAX708CSA
MB8421-90LPFQ	MB8421-90LPFQ

IC	Page or ID No.
MB89371AH-PF	MB89371APF
MBM29F040C-90PFTN	AM29F040-90EC
MC100LVEL91DWR2	MC100LVEL91DWR2
MC10E111FNR2	MC10E111FNR2
MC10EL07DR2	MC10EL07DR2
MC10EL11DR2	MC10EL11DR2
MC10EL16DR2	MC10EL16DR2
MC10EL31DR2	MC10EL31DR2
MC10ELT20D	MC10ELT20D
MC10ELT21DR2	MC10ELT21DR2
MC10H124M	MC10124L
MC10H124MEL	MC10124L
MT58L128L18FT-8.5TR	MT58LC128K18B3LG-10TR
MT58LC128K18B3LG-10TR	MT58LC128K18B3LG-10TR
MT58LC128K18B4LG-9TR	MT58LC128K18B3LG-10TR
MX27C4000MC-12	MX27C4000MC-12-TEL
NJM082M	RC4558
NJM2406F	NJM2406F
NJM2406F-TE2	NJM2406F
NJU7211U30(TE1)	S-80250AG-GB
PI74FCT162501ETA	IDT74FCT162501ETPA
PI74FCT162841ETA	IDT74FCT162841ETPA
PIPI74FCT162501ETA	IDT74FCT162501ETPA
RF5C62	RF5C62
RF5C62-E2	RF5C62
S4405B-80	S4405B-80
SN74ABT16823DGGR	SN74ABT16823DGGR
SN74ABT245BPW-E05	TC74HC245P
SN74ABT541BPW-E05	MC74HC541N
SN74ABT821APW-E05	V74ACT821
SN74ALS541N	SN74LS541N
SN74LS06N	SN7406N
SN74LVT16501DGGR	SN74LVT16501DLR
SN74LVT16835DGGR	SN74LVT16835DGGR
SN74LVT16952DGGR	SN74LVT16952DGGR
SN74LVT245APW-E05	TC74HC245P
SN74LVTH162244DGGR	IDT74FCT16244ATPV
SN74LVTH16245ADGGR	IDT74FCT16245ATPV-TR
SN74LVTH16501DGGR	SN74LVT16501DLR
SN74LVTH16835DGGR	SN74LVT16835DGGR
SN74LVTH16952DGGR	SN74LVT16952DGGR
SN74LVTH245APW-E05	SN74LVTH245APW-E05
TC74AC00FT(EL)	TC74HC00P
TC74AC04FT(EL)	TC74HC04P
TC74AC151F	TC74HC151P
TC74AC240F-EL	TC74HC240P
TC74AC283F	TC74HC283P
TC74AC541F-EL	MC74HC541N
TC74AC74FT(EL)	TC74HC74P
TC74ACT00FT(EL)	TC74HC00P
TC74ACT04FT(EL)	TC74HC04P
TC74ACT08FT(EL)	TC74HC08P
TC74ACT139FT(EL)	TC74HC139P
TC74ACT14FT(EL)	TC74HC14P


IC	Page or ID No.
TC74ACT157FT(EL)	TC74HC157P
TC74ACT244FT(EL)	TC74HC244P
TC74ACT32FT(EL)	TC74HC32P
TC74ACT541FT(EL)	MC74HC541N
TC74ACT574FT(EL)	TC74HC574P
TC74ACT74FT(EL)	TC74HC74P
TC74VHC123AFT(EL)	TC74HC123P
TC74VHC163FT(EL)	TC74HC163P
TC74VHC165F	TC74HC165P
TC74VHC165F(EL)	TC74HC165P
TC74VHC221AFT(EL)	TC74HC221P
TC74VHC32FT(EL)	TC74HC32P
TC74VHC541FT(EL)	MC74HC541N
TD62306F	TD62306P
TL082CPS-E05	RC4558
TL082CPS-E20	RC4558
TL082M	RC4558
TLC272CPW-E05	RC4558
TLC272CPWR	RC4558
TLC2932IPW	TLC2932IPW
UPA102G-E1	UPA102G
UPC2708T-E3	UPC2708T-E3
UPC2712T-E3	UPC2712T-E3
WS57C291C-35T	WS57C291-45
WS57C51C-35J	WS57C51C-35J
WS57C71C-35J	WS57C71C-35J
ZA4041	ZA4041

OTHERS	Page or ID No.
TLP624(BV)	MA006-01
TLP721(D4)-GR	MA006-01
TLP721(D4-)	MA006-01

IC

AT27C4096-12JI (ATMEL)

4 M (262,144 × 16)-BIT ONE TIME PROM
—TOP VIEW—

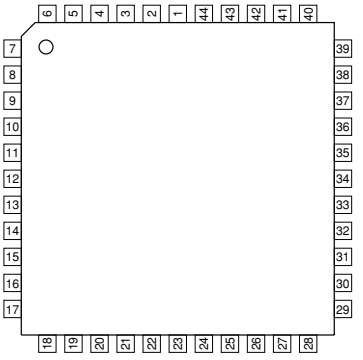

INPUTS
A0 - A17 : ADDRESS
$\overline{CE}$: CHIP ENABLE
$\overline{OE}$: OUTPUT ENABLE


OUTPUTS
O0 - O15 : DATA

OTHERS
VPP : PROGRAMMABLE POWER SUPPLY
NC : NO CONNECTION

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	NC	12	—	GND	23	—	NC	34	—	GND
2	—	VPP	13	—	NC	24	I	A0	35	I	A9
3	I	$\overline{CE}$	14	O	O7	25	I	A1	36	I	A10
4	O	O15	15	O	O6	26	I	A2	37	I	A11
5	O	O14	16	O	O5	27	I	A3	38	I	A12
6	O	O13	17	O	O4	28	I	A4	39	I	A13
7	O	O12	18	O	O3	29	I	A5	40	I	A14
8	O	O11	19	O	O2	30	I	A6	41	I	A15
9	O	O10	20	O	O1	31	I	A7	42	I	A16
10	O	O9	21	O	O0	32	I	A8	43	I	A17
11	O	O8	22	I	$\overline{OE}$	33	—	NC	44	—	VCC

EPM7064SLC44-7 (ALTERA)


PROGRAMMABLE LOGIC DEVICE
—TOP VIEW—

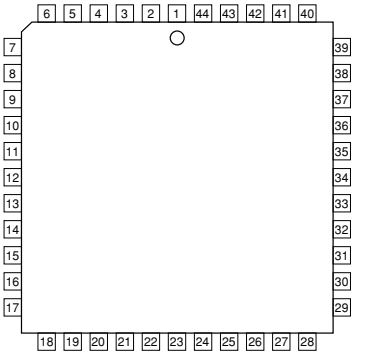

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	INPUT/$\overline{GCLR}$	12	I/O	I/O	23	—	VCC	34	I/O	I/O
2	I	INPUT/$\overline{OE2}$/GCLK2	13	I/O	I/O (TMS)	24	I/O	I/O	35	—	VCC
3	—	VCC	14	I/O	I/O	25	I/O	I/O	36	I/O	I/O
4	I/O	I/O	15	—	VCC	26	I/O	I/O	37	I/O	I/O
5	I/O	I/O	16	I/O	I/O	27	I/O	I/O	38	I/O	I/O (TDO)
6	I/O	I/O	17	I/O	I/O	28	I/O	I/O	39	I/O	I/O
7	I/O	I/O (TDI)	18	I/O	I/O	29	I/O	I/O	40	I/O	I/O
8	I/O	I/O	19	I/O	I/O	30	—	GND	41	I/O	I/O
9	I/O	I/O	20	I/O	I/O	31	I/O	I/O	42	—	GND
10	—	GND	21	I/O	I/O	32	I/O	I/O (TCK)	43	I	INPUT/GCLK1
11	—	VCC	22	—	GND	33	I/O	I/O	44	I	INPUT/$\overline{OE1}$

INPUTS
GCLK1, GCLK2 : GLOBAL CLOCK 1, 2
$\overline{GCLR}$: GLOBAL CLEAR
$\overline{OE1}$, $\overline{OE2}$: OUTPUT ENABLE 1, 2


INPUTS/OUTPUTS
I/O : DATA

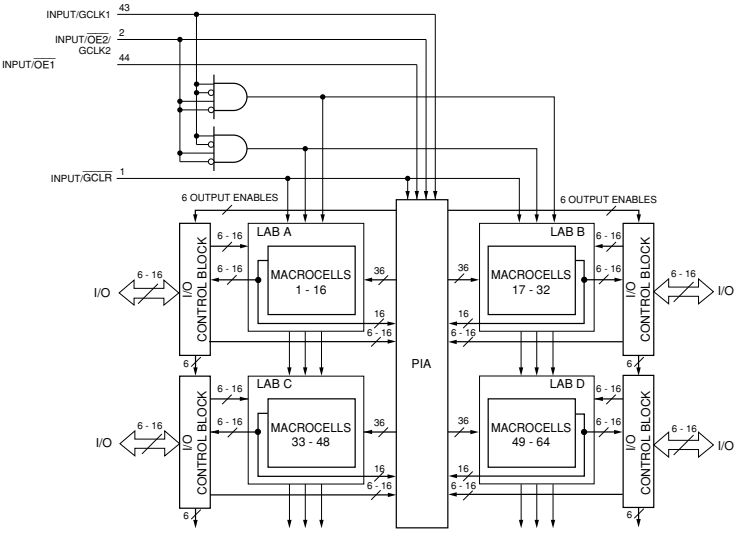



*ABOVE DIAGRAM SHOWS CONDITIONS BEFORE PROGRAMMING.

GS4982-CKA (GENNUM)

VIDEO SYNC SEPARATOR
—TOP VIEW—

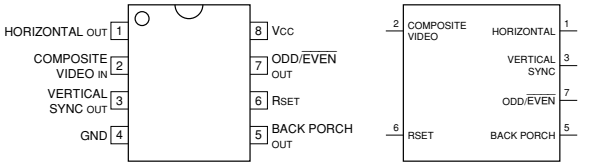


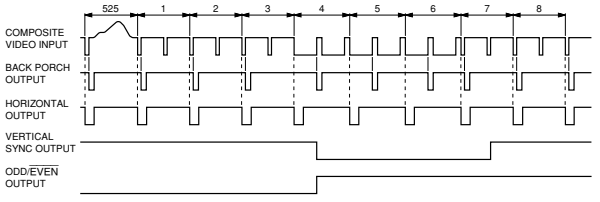


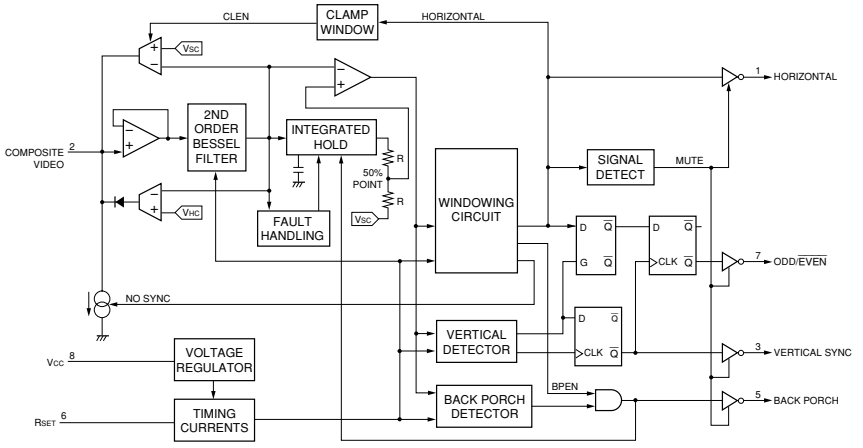


M27C256B-10F1-(K) (ST)

C-MOS 256 K (32 K × 8)-BIT UV ERASABLE PROM WITH 3-STATE OUTPUTS
—TOP VIEW—

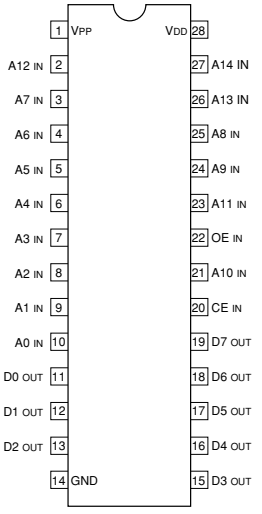



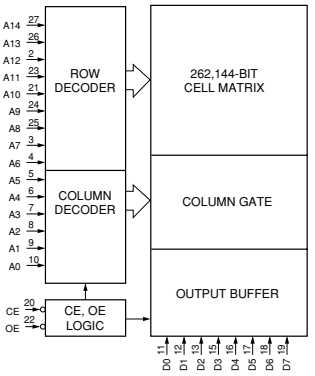

A0 - A14 : ADDRESS INPUTS
$\overline{CE}$: CHIP ENABLE INPUT
D0 - D7 : DATA OUTPUTS
$\overline{OE}$: OUTPUT ENABLE INPUT
VPP : PROGRAM POWER SUPPLY

An	CE	OE	VDD	VPP	Dn	FUNCTION
An	0	0	+5 V	+5 V	D OUT	READ
An	0	1	+5 V	+5 V	HI-Z	OUTPUT DISABLE
×	1	×	+5 V	+5 V	HI-Z	STANDBY
An	0	1	+6 V	+12.5 V	D IN	PGM
An	1	0	+6 V	+12.5 V	D OUT	PGM VERIFY (1)
An	0	0	+6 V	+12.5 V	D OUT	PGM VERIFY (2)
×	1	1	+6 V	+12.5 V	HI-Z	PGM INH
AO	0	0	+5 V	+5 V	DEVICE CODE	ELECTRONIC SIGNATURE*

* SEE FOLLOWING DESCRIPTION

0 : LOW LEVEL
1 : HIGH LEVEL
× : DON'T CARE
HI-Z : HIGH IMPEDANCE

ELECTRONIC SIGNATURE FOR P ROM WRITER
ADDRESS SETTINGS IN READ MODE

A1 - A8	A9	A10 - A13	A14, Vpp
0	12 V	0	1

	CODE DATA								
	AO	D7	D6	D5	D4	D3	D2	D1	D0	
MAKER CODE	0	0	0	0	0	0	1	0	0	04H
DEVICE CODE	1	0	1	1	0	0	0	1	0	62H

Section 3
Spare Parts

3−1. 補修部品注意事項

1. 安全重要部品

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に “o” で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. 単位の表記

下記の単位については，表記を変更または省略しています。

単位		表記
静電容量	μF	uF
インダクタンス	μH	uH
抵抗値	Ω	省略
温度	℃	xxx−DEG−C

3-1. Notes on Repair Parts

1. Safety Related Components Warning

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may be not stocked. Therefore, the delivery date will be delayed.


4. Units Representation

The following represented units are changed or omitted in writing.

Units		Representation
Capacitance	μF	uF
Inductance	μH	uH
Resistance	Ω	Abbreviation
Temperature	℃	XXX-DEG-C


3-2. Exploded Views

HDS-7000 Chassis

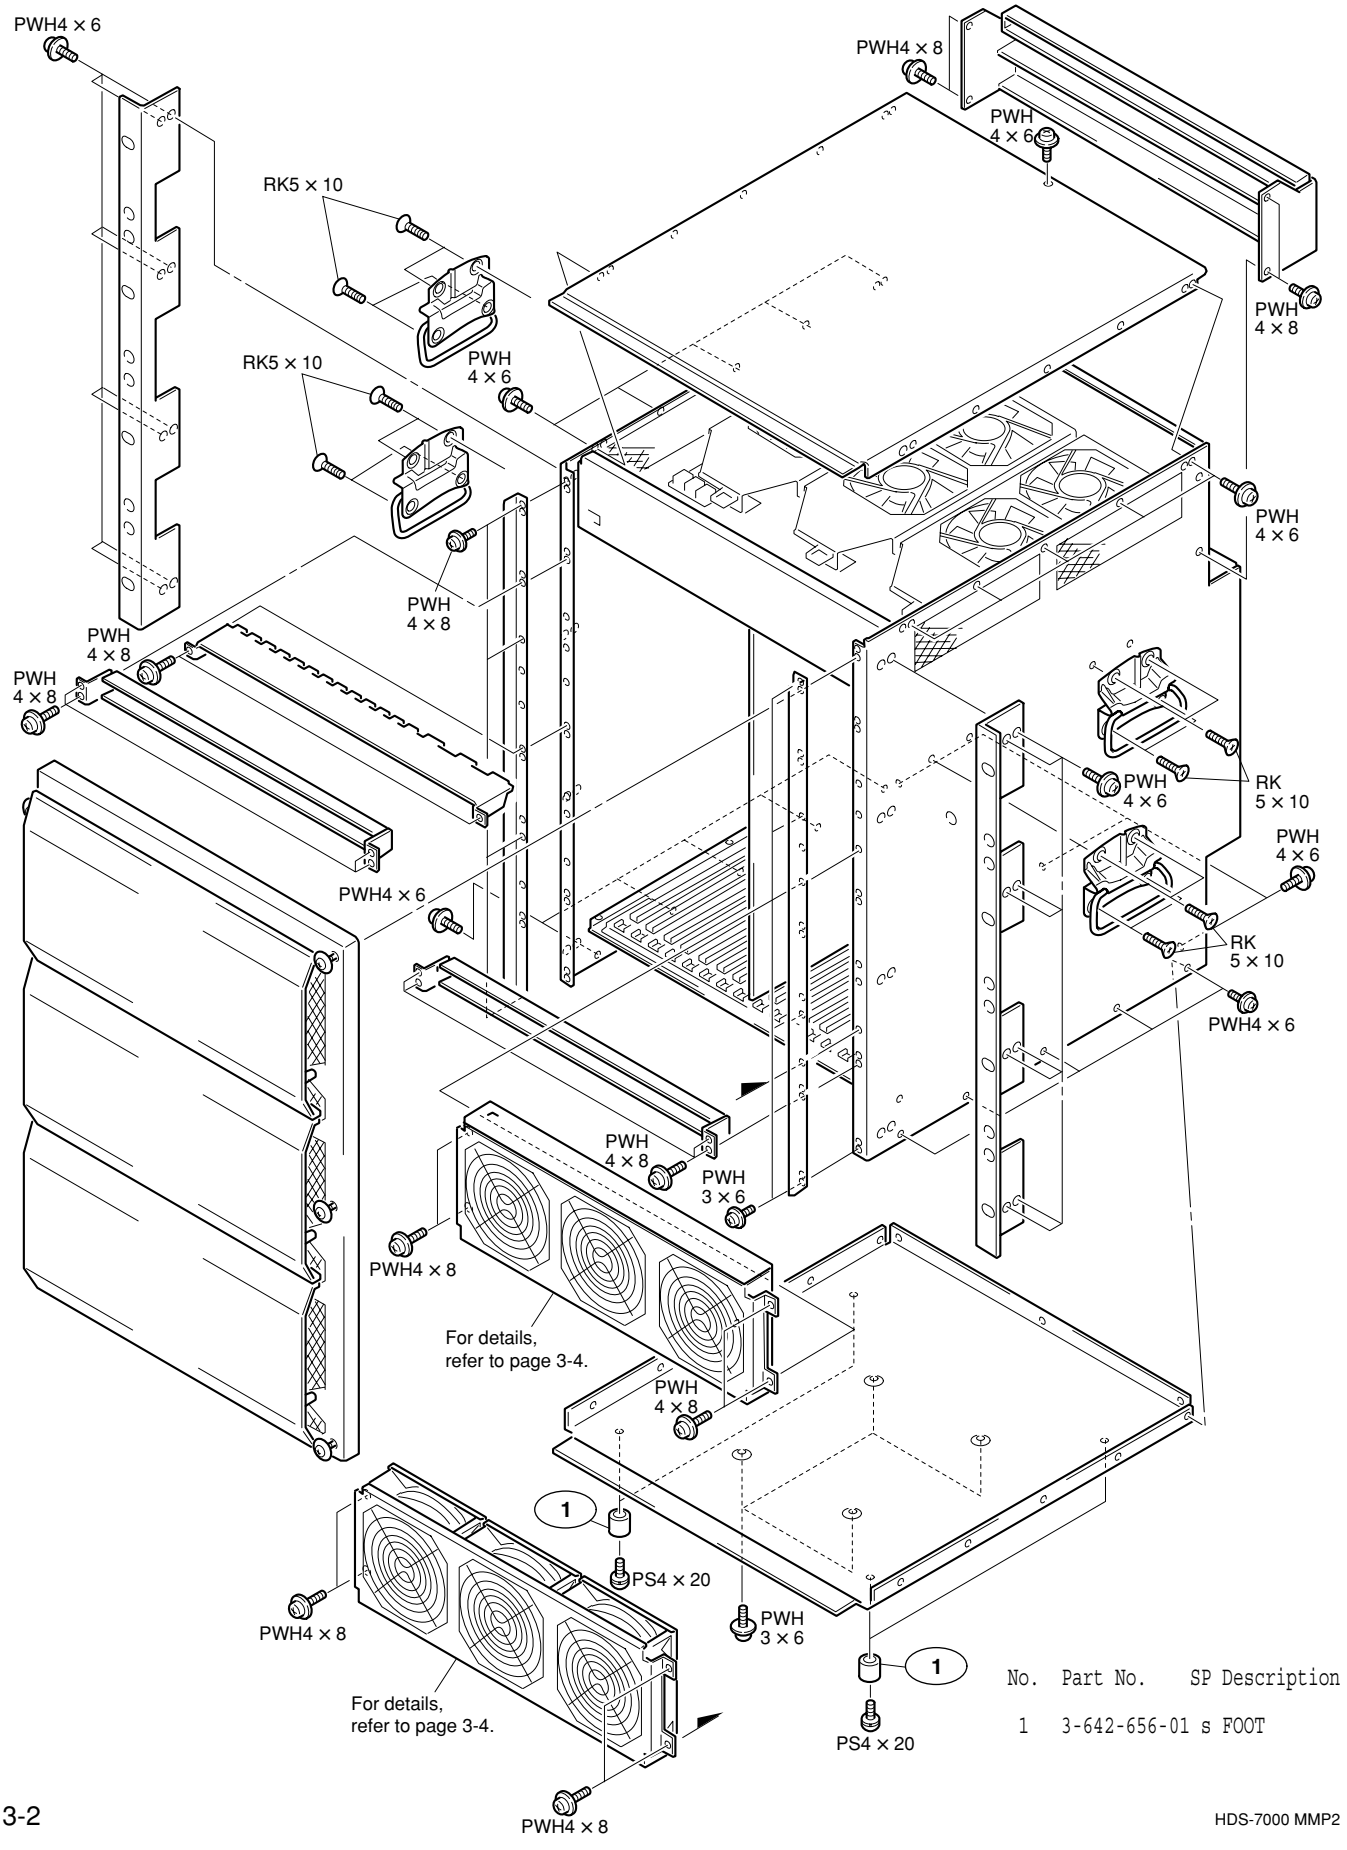

No.	Part No.	SP	Description
1	3-642-656-01	s	FOOT

HDS-7000 Front Panel

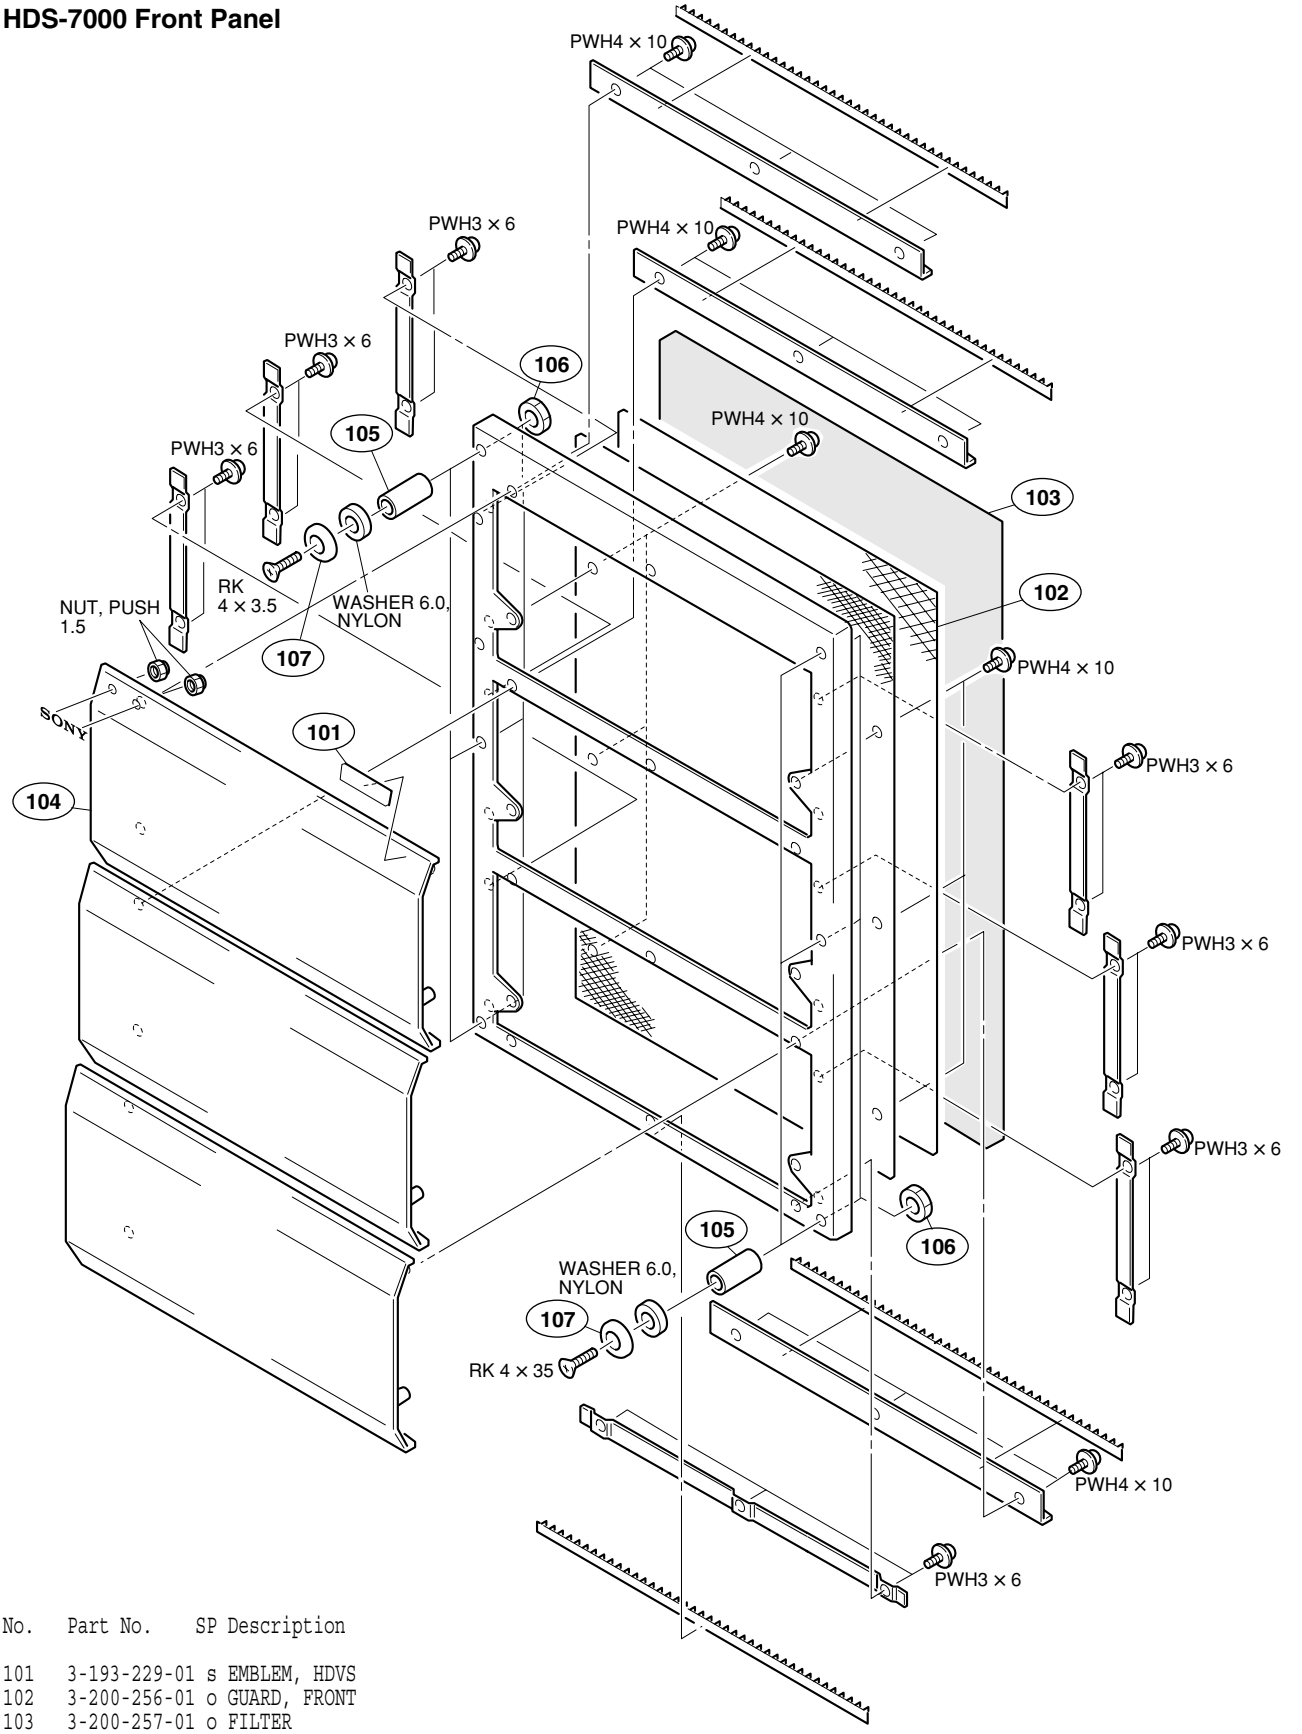


No.	Part No.	SP	Description
101	3-193-229-01	s	EMBLEM, HDVS
102	3-200-256-01	o	GUARD, FRONT
103	3-200-257-01	o	FILTER
104	3-200-258-02	o	COVER (UPPER), FRONT
105	3-648-056-00	o	SPACER (4X18)
106	3-680-316-00	s	NUT (M4), STOPPER
107	3-703-225-00	s	WASHER (4 DIA.), ORNAMENTAL


Fan (1/2)

HDS-7000 Fan (1/2)

Upper Fans

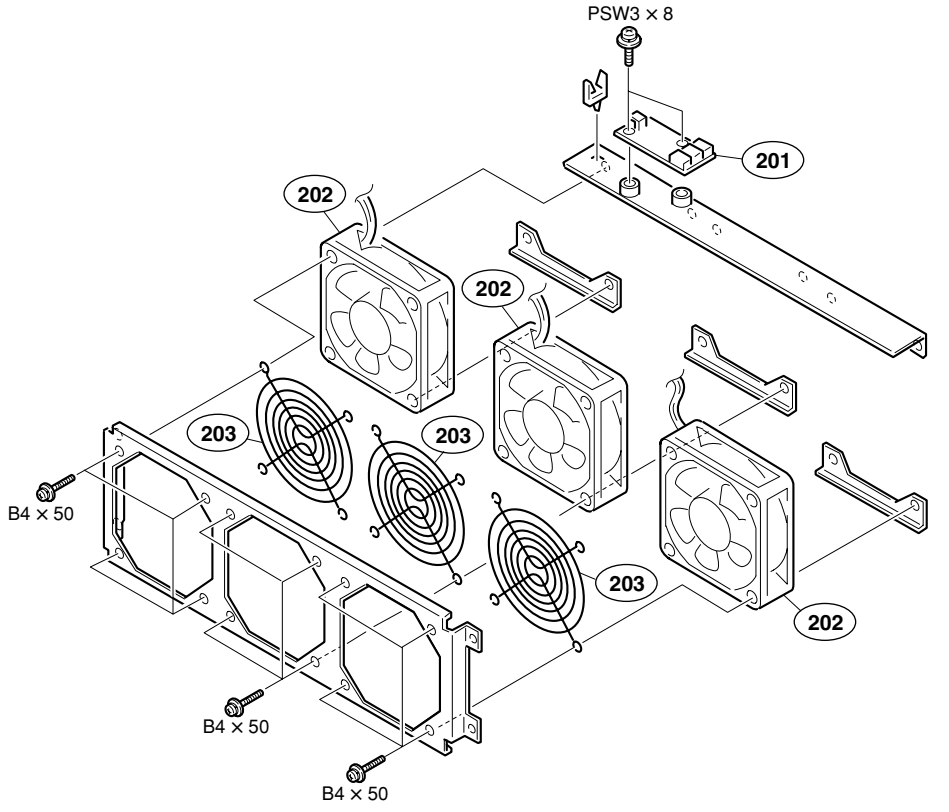


Lower Fans

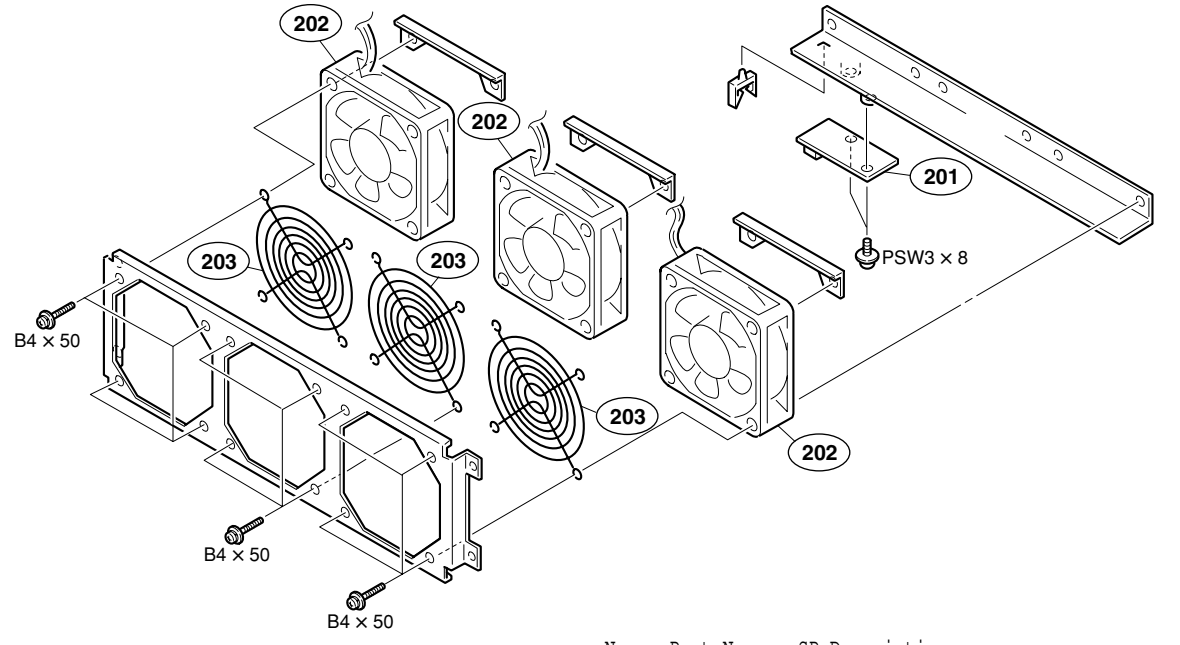


No.	Part No.	SP	Description
201	A-8317-481-A	o	MOUNTED CIRCUTI BOARD, CN-1539
202	1-698-873-11	s	FAN, DC
203	3-172-382-01	o	GUARD,FAN

HDS-7000 Fan (2/2)

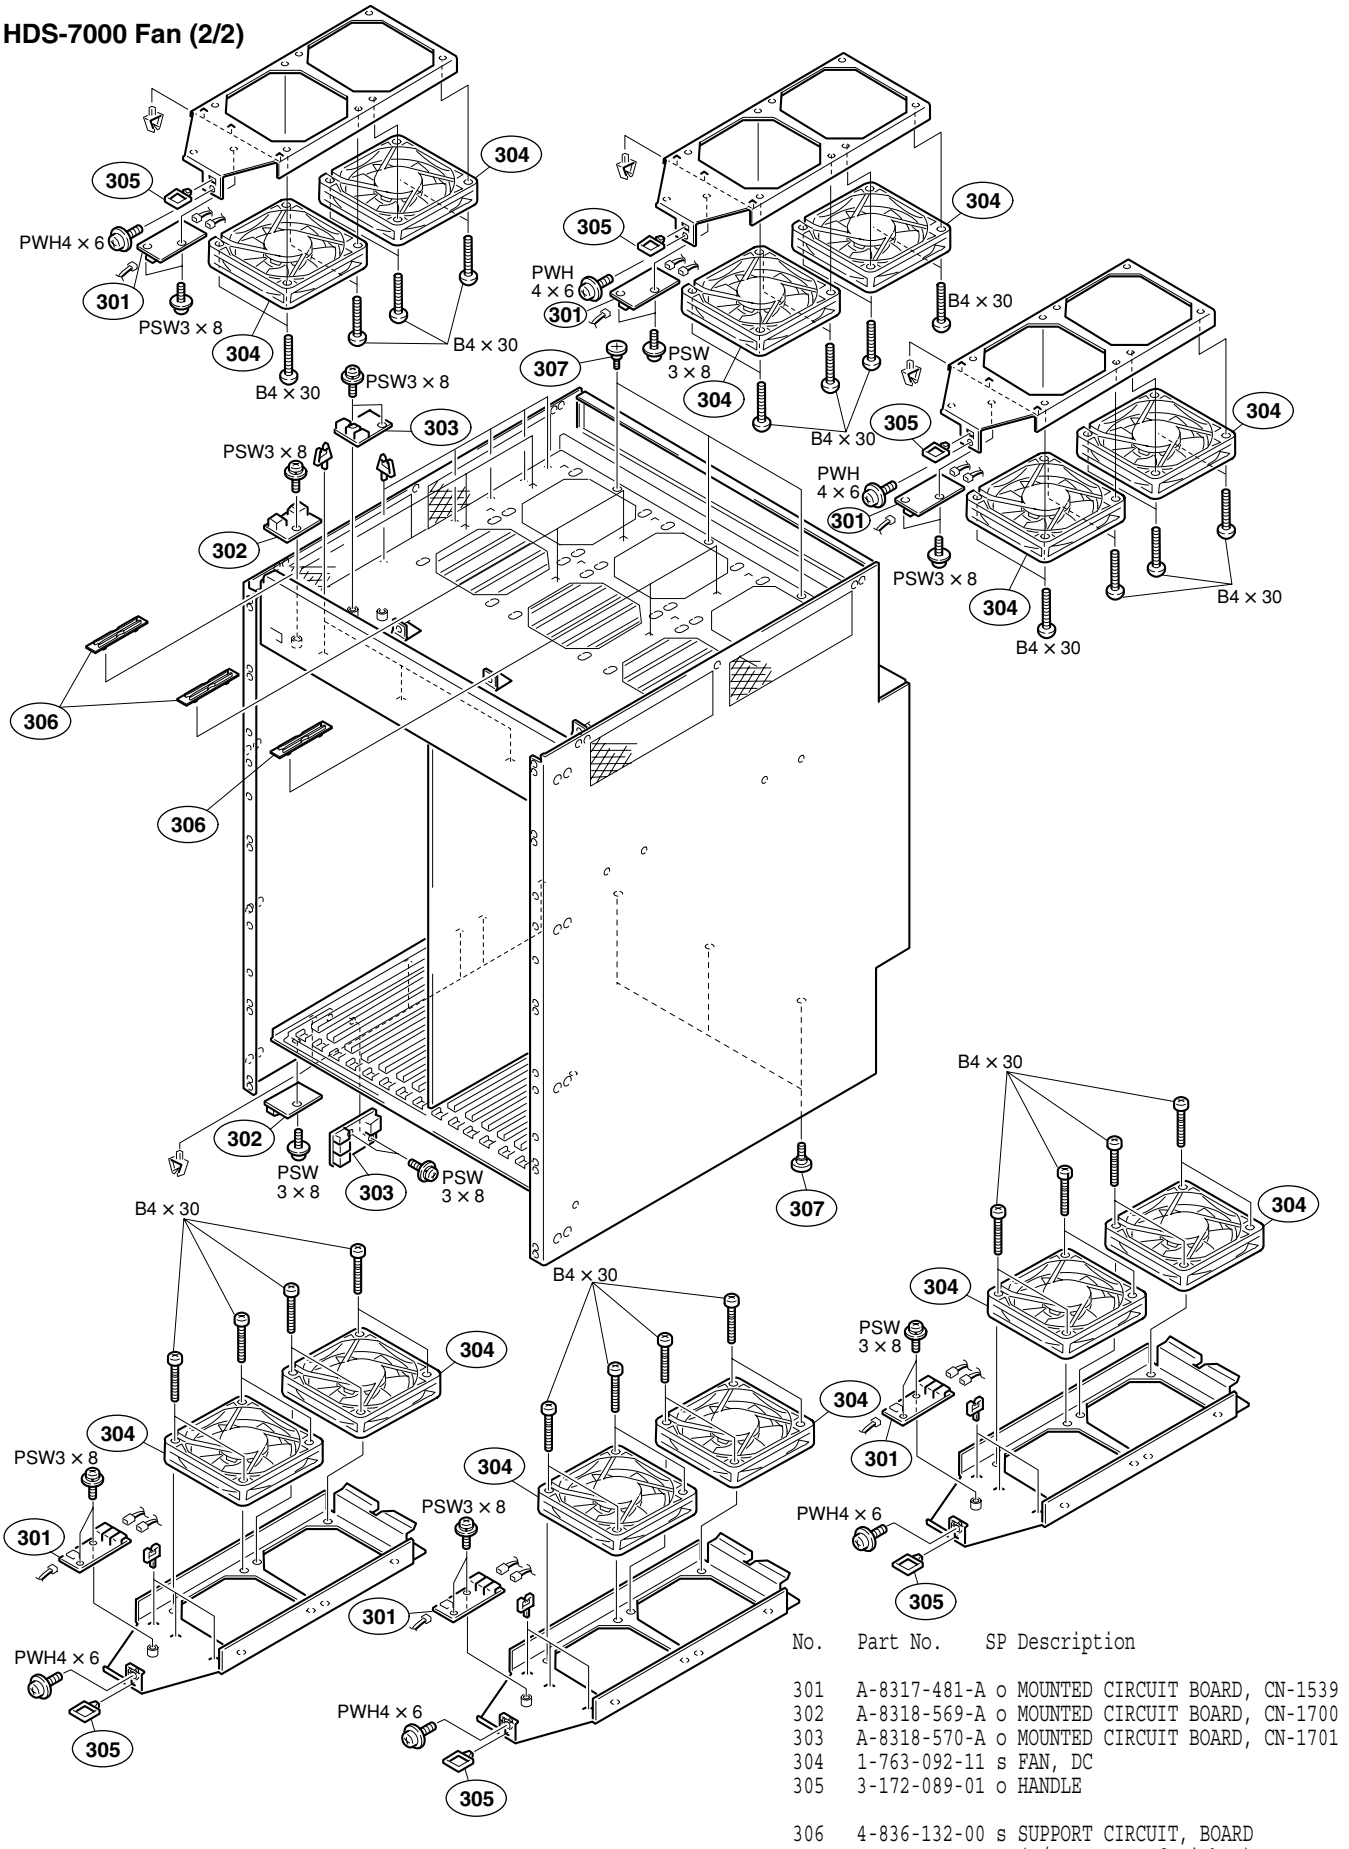


No.	Part No.	SP	Description
301	A-8317-481-A	o	MOUNTED CIRCUIT BOARD, CN-1539
302	A-8318-569-A	o	MOUNTED CIRCUIT BOARD, CN-1700
303	A-8318-570-A	o	MOUNTED CIRCUIT BOARD, CN-1701
304	1-763-092-11	s	FAN, DC
305	3-172-089-01	o	HANDLE
306	4-836-132-00	s	SUPPORT CIRCUIT, BOARD (S/N 10011 and Higher)
307	4-884-982-00	s	SCREW, STEP (S/N 10011 and Higher)

HDS-7000 Rear Panel

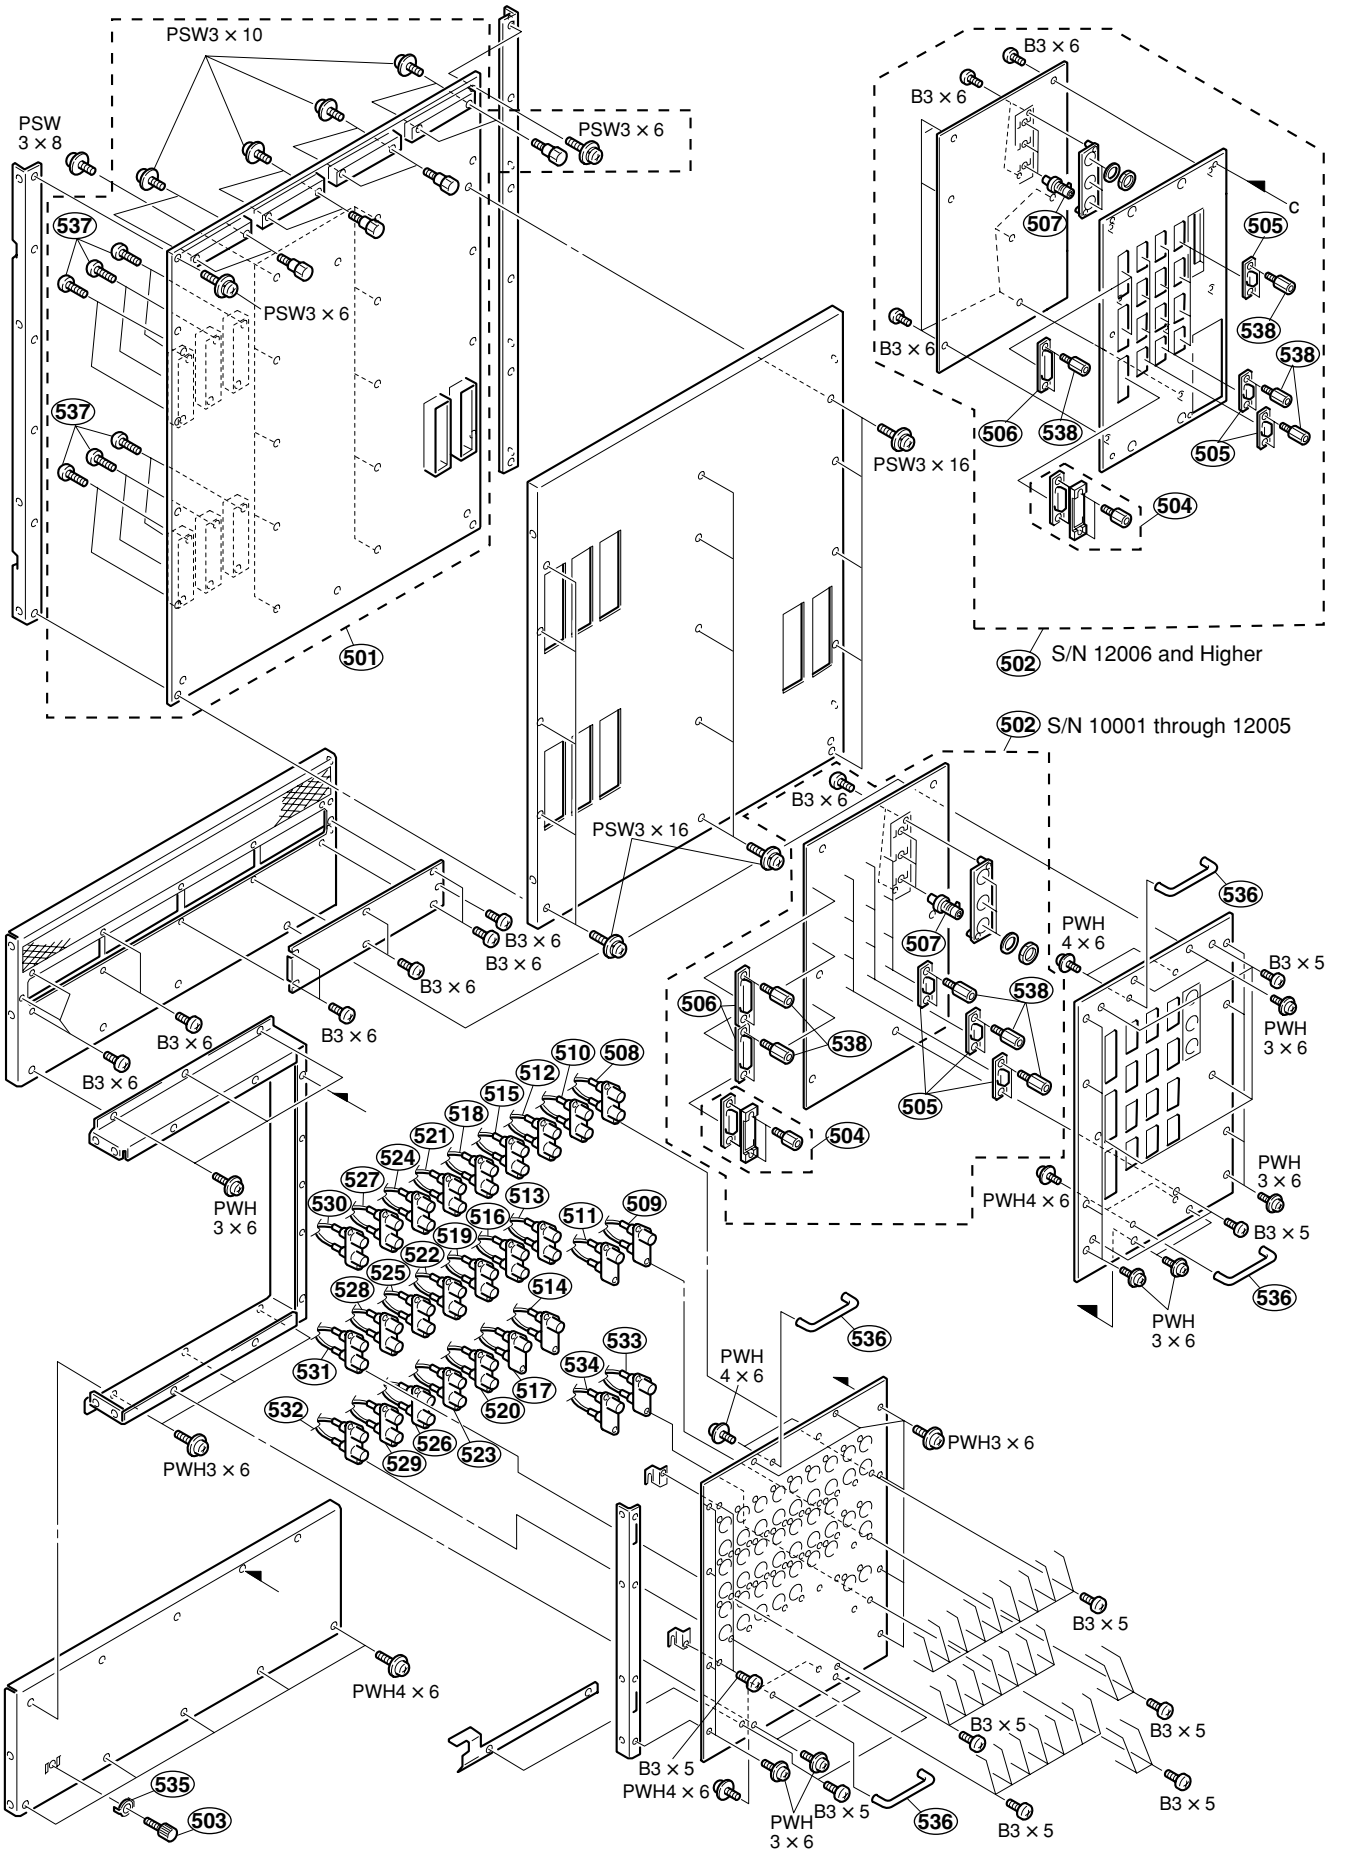


No.	Part No.	SP	Description
501	A-8317-477-A	o	MOUNTED CIRCUIT BOARD, MB-494
502	A-8317-479-A	o	MOUNTED CIRCUIT BOARD, CN-1439
503	X-2068-004-0	s	TERMINAL ASSY
504	1-563-826-31	o	CONNECTOR, D-SUB 15P
505	1-563-890-11	o	CONNECTOR, D-SUB 9P
506	1-563-891-21	o	CONNECTOR, D-SUB 25P
507	1-764-274-11	o	CONNECTOR, COAXIAL (BNC TYPE)
508	1-783-388-11	o	CABLE ASSY, COAXIAL (1ME1, 2ME1)
509	1-783-389-11	o	CABLE ASSY, COAXIAL (1ME2, 2ME2)
510	1-783-390-11	o	CABLE ASSY, COAXIAL (PGM1, PGM2)
511	1-783-391-11	o	CABLE ASSY, COAXIAL (PGM3)
512	1-783-392-11	o	CABLE ASSY, COAXIAL (AX1, AX2)
513	1-783-393-11	o	CABLE ASSY, COAXIAL (AX3, AX4)
514	1-783-394-11	o	CABLE ASSY, COAXIAL (AX5)
515	1-783-395-11	o	CABLE ASSY, COAXIAL (AX6, AX7)
516	1-783-396-11	o	CABLE ASSY, COAXIAL (AX8, AX9)
517	1-783-397-11	o	CABLE ASSY, COAXIAL (AX10)
518	1-783-398-11	o	CABLE ASSY, COAXIAL (I1, I2)
519	1-783-399-11	o	CABLE ASSY, COAXIAL (I3, I4)
520	1-783-400-11	o	CABLE ASSY, COAXIAL (I5, I6)
521	1-783-401-11	o	CABLE ASSY, COAXIAL (I7, I8)
522	1-783-402-11	o	CABLE ASSY, COAXIAL (I9, I10)
523	1-783-403-11	o	CABLE ASSY, COAXIAL (I11, I12)
524	1-783-404-11	o	CABLE ASSY, COAXIAL (I13, I14)
525	1-783-405-11	o	CABLE ASSY, COAXIAL (I15, I16)
526	1-783-406-11	o	CABLE ASSY, COAXIAL (I17, I18)
527	1-783-407-11	o	CABLE ASSY, COAXIAL (I19, I20)
528	1-783-408-11	o	CABLE ASSY, COAXIAL (I21, I22)
529	1-783-409-11	o	CABLE ASSY, COAXIAL (I23, I24)
530	1-783-410-11	o	CABLE ASSY, COAXIAL (I25, I26)
531	1-783-411-11	o	CABLE ASSY, COAXIAL (I27, I28)
532	1-783-412-11	o	CABLE ASSY, COAXIAL (I29, I30)
533	1-783-413-11	o	CABLE ASSY, COAXIAL (PVW)
534	1-783-414-11	o	CABLE ASSY, COAXIAL (CLN)
535	2-068-008-00	s	WASHER
536	2-270-616-00	o	HANDLE
537	3-187-548-02	s	GIZA TITE, +BV 3X10
538	3-673-910-21	o	SCREW, CONNECTOR

HDS-7000 Board (1/4)

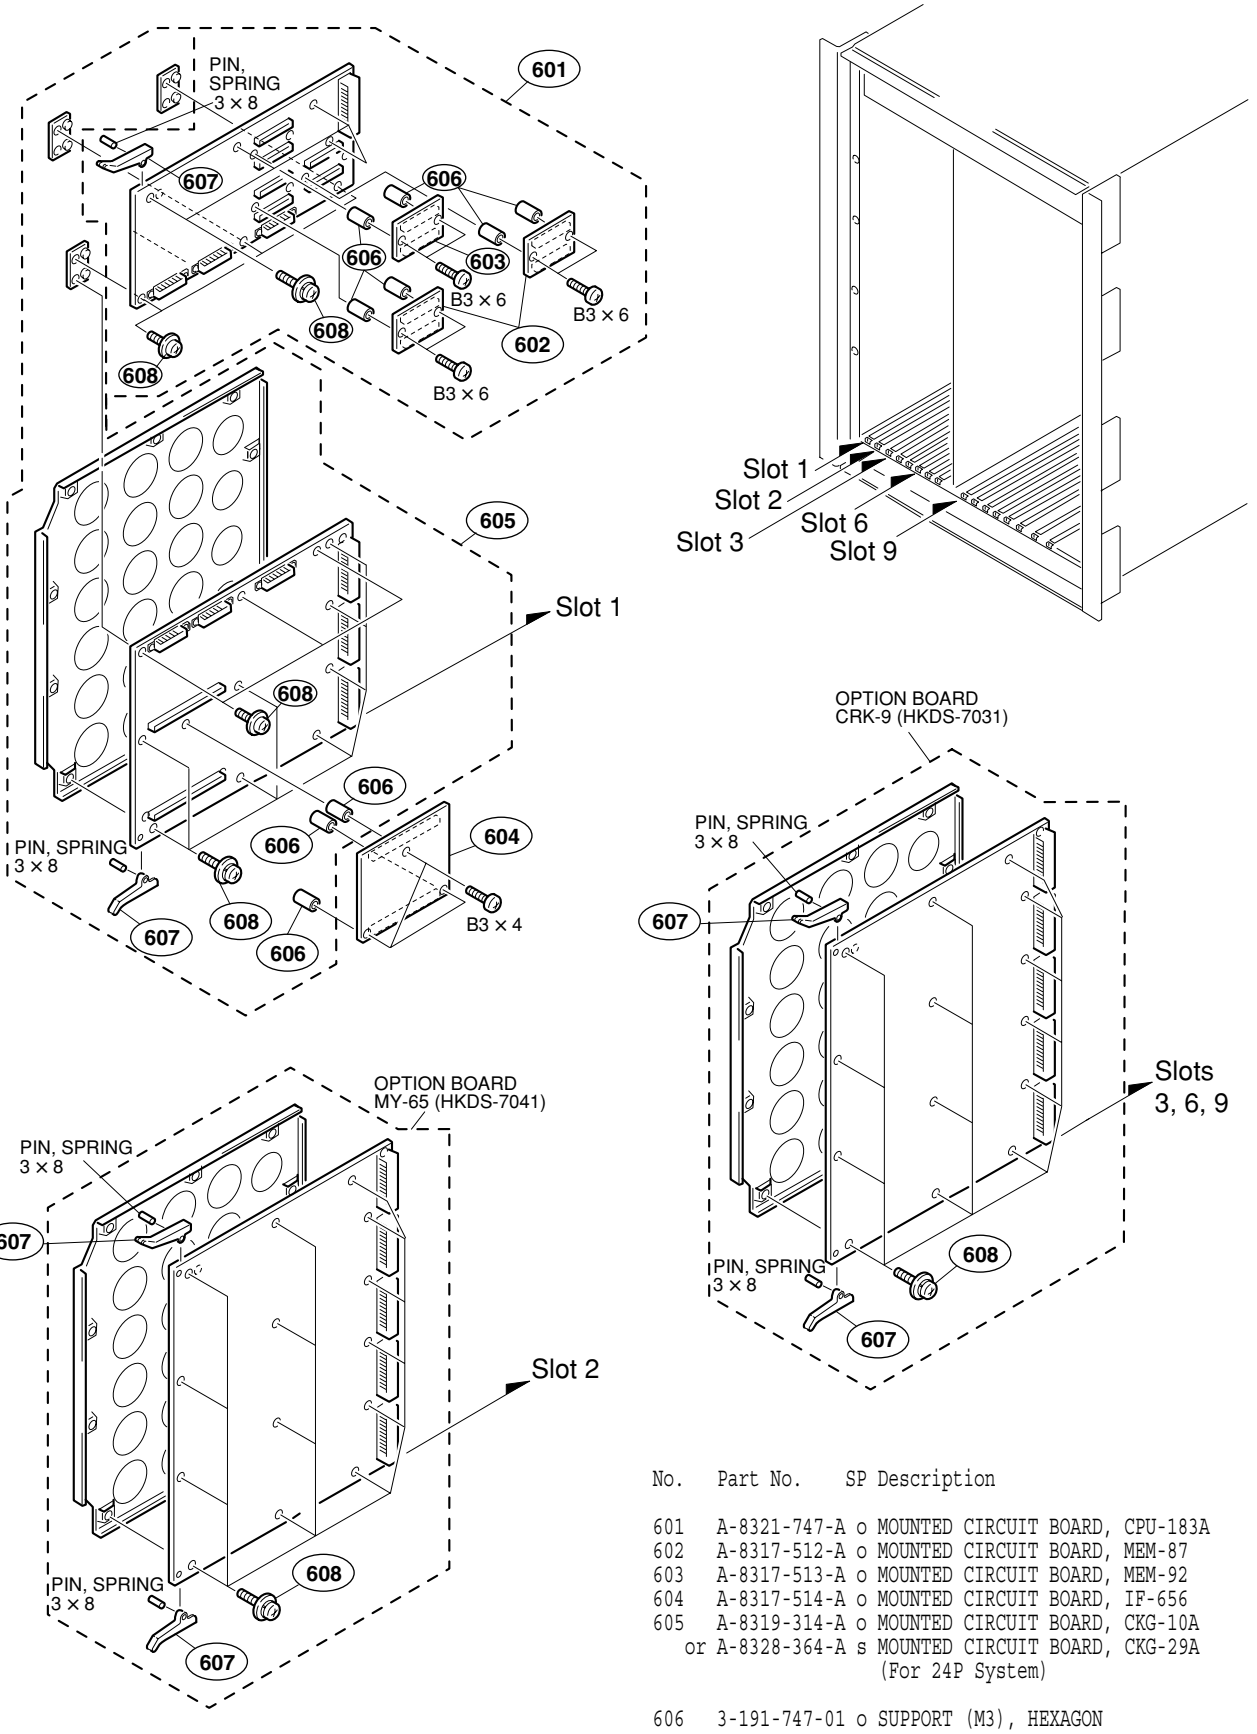


No.	Part No.	SP	Description
601	A-8321-747-A	o	MOUNTED CIRCUIT BOARD, CPU-183A
602	A-8317-512-A	o	MOUNTED CIRCUIT BOARD, MEM-87
603	A-8317-513-A	o	MOUNTED CIRCUIT BOARD, MEM-92
604	A-8317-514-A	o	MOUNTED CIRCUIT BOARD, IF-656
605	A-8319-314-A	o	MOUNTED CIRCUIT BOARD, CKG-10A
	or A-8328-364-A	s	MOUNTED CIRCUIT BOARD, CKG-29A (For 24P System)
606	3-191-747-01	o	SUPPORT (M3), HEXAGON
607	3-194-878-01	s	LEVER, PC BOARD
608	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3X6

HDS-7000 Board (2/4)

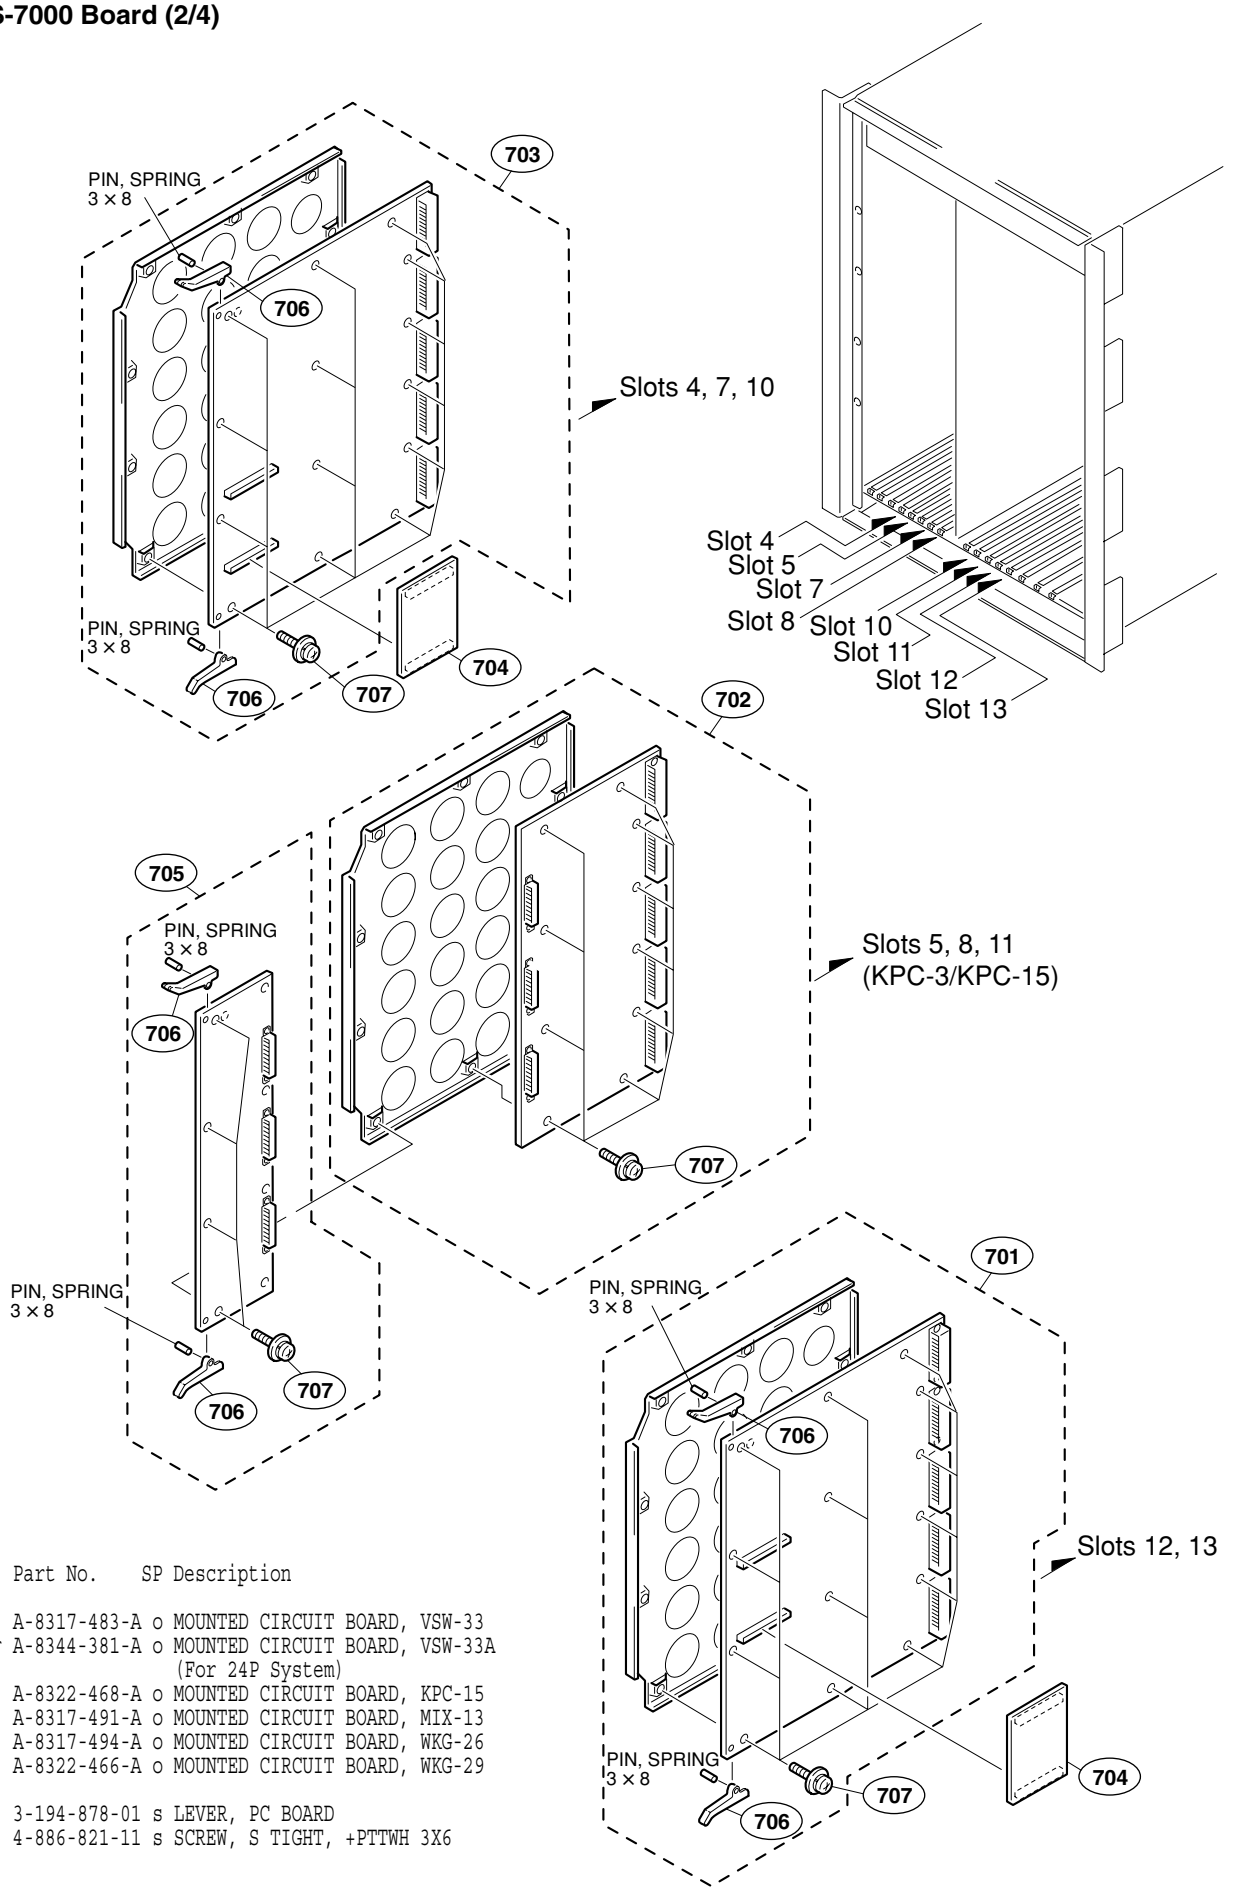

No.	Part No.	SP	Description
701	A-8317-483-A	o	MOUNTED CIRCUIT BOARD, VSW-33
	or A-8344-381-A	o	MOUNTED CIRCUIT BOARD, VSW-33A (For 24P System)
702	A-8322-468-A	o	MOUNTED CIRCUIT BOARD, KPC-15
703	A-8317-491-A	o	MOUNTED CIRCUIT BOARD, MIX-13
704	A-8317-494-A	o	MOUNTED CIRCUIT BOARD, WKG-26
705	A-8322-466-A	o	MOUNTED CIRCUIT BOARD, WKG-29
706	3-194-878-01	s	LEVER, PC BOARD
707	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3X6


HDS-7000 Board (3/4)

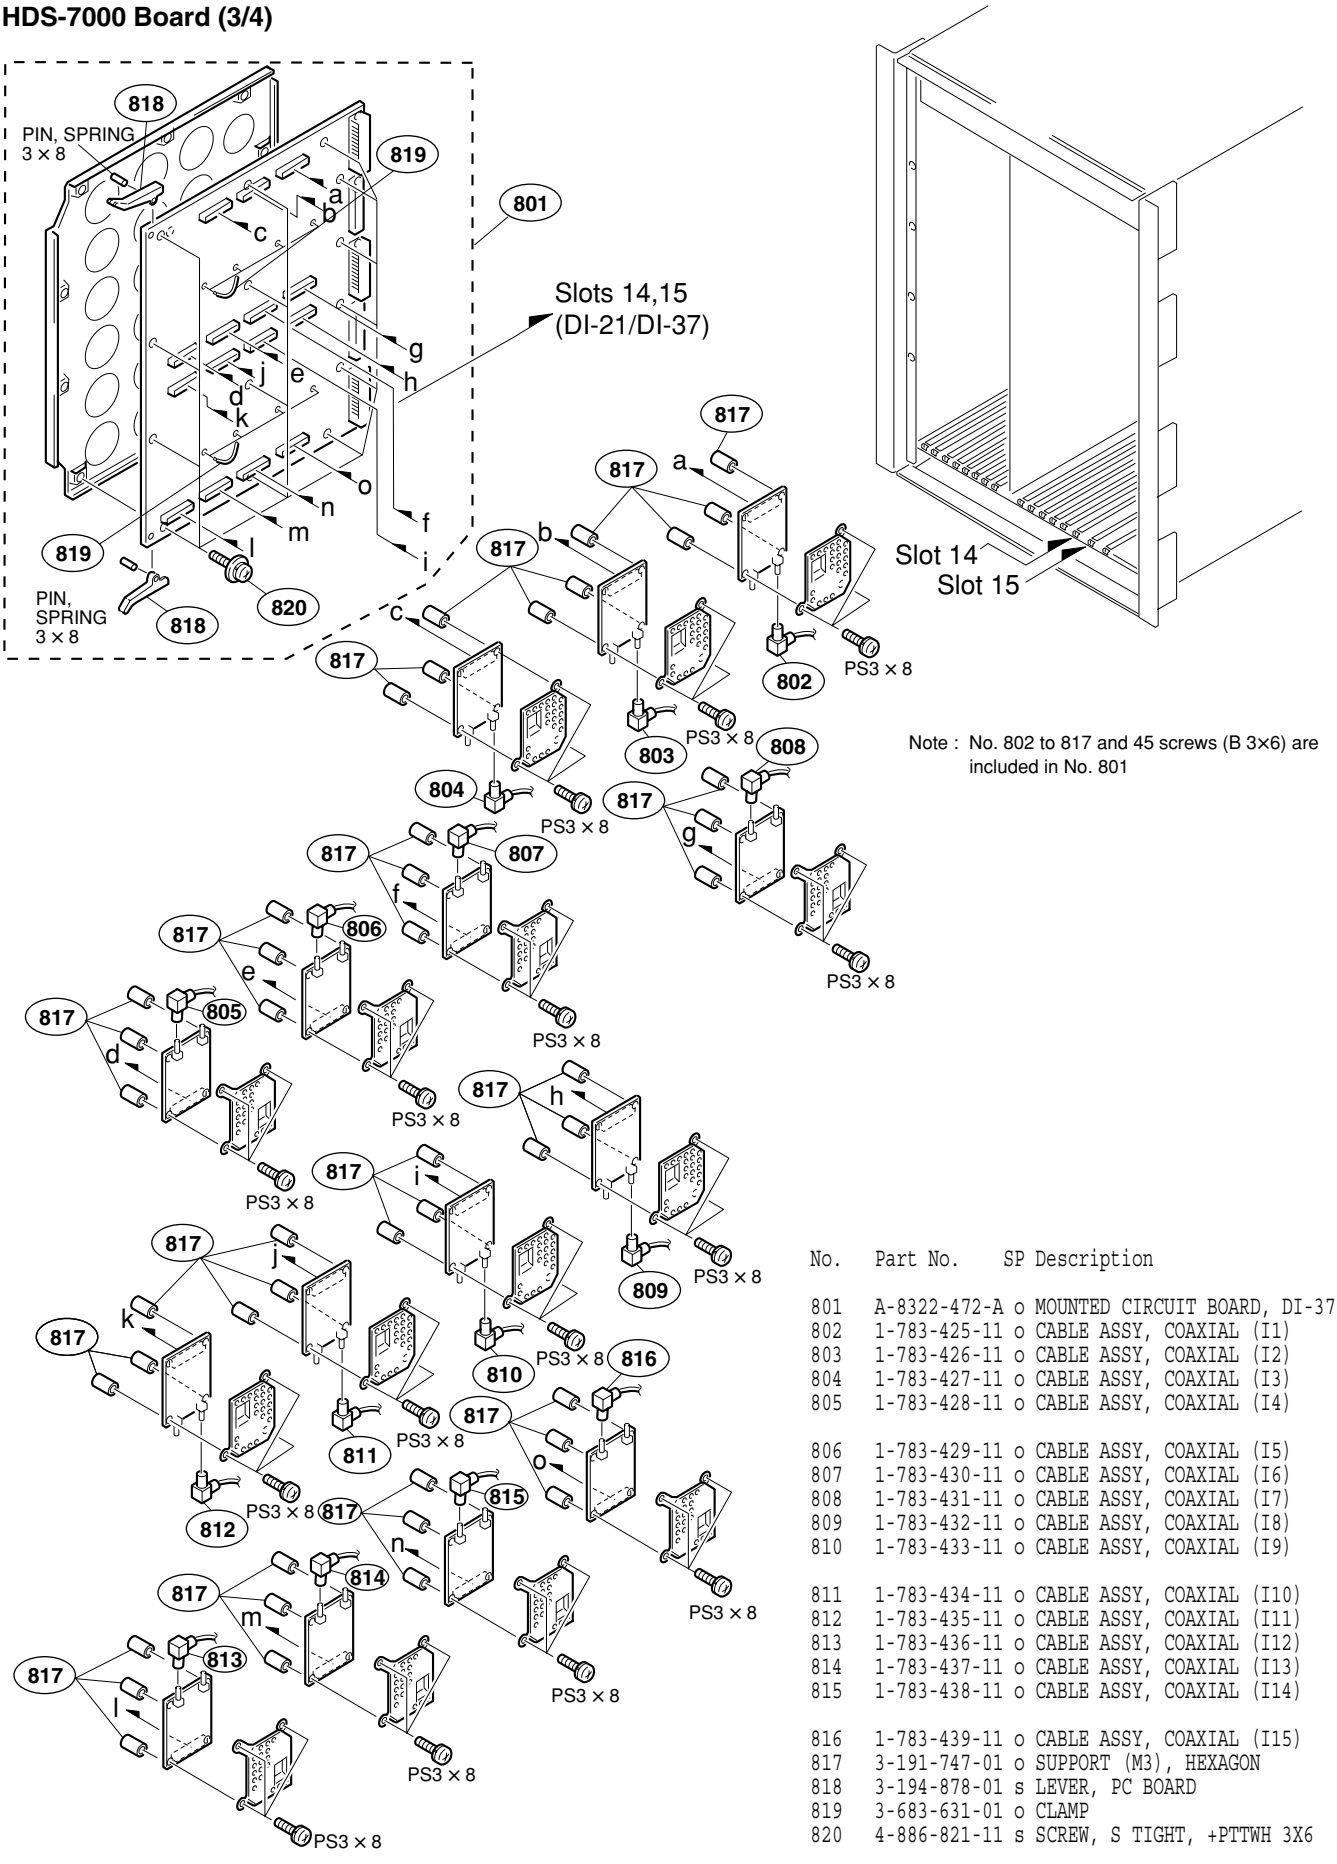

Note : No. 802 to 817 and 45 screws (B 3×6) are included in No. 801

No.	Part No.	SP	Description
801	A-8322-472-A	o	MOUNTED CIRCUIT BOARD, DI-37
802	1-783-425-11	o	CABLE ASSY, COAXIAL (I1)
803	1-783-426-11	o	CABLE ASSY, COAXIAL (I2)
804	1-783-427-11	o	CABLE ASSY, COAXIAL (I3)
805	1-783-428-11	o	CABLE ASSY, COAXIAL (I4)
806	1-783-429-11	o	CABLE ASSY, COAXIAL (I5)
807	1-783-430-11	o	CABLE ASSY, COAXIAL (I6)
808	1-783-431-11	o	CABLE ASSY, COAXIAL (I7)
809	1-783-432-11	o	CABLE ASSY, COAXIAL (I8)
810	1-783-433-11	o	CABLE ASSY, COAXIAL (I9)
811	1-783-434-11	o	CABLE ASSY, COAXIAL (I10)
812	1-783-435-11	o	CABLE ASSY, COAXIAL (I11)
813	1-783-436-11	o	CABLE ASSY, COAXIAL (I12)
814	1-783-437-11	o	CABLE ASSY, COAXIAL (I13)
815	1-783-438-11	o	CABLE ASSY, COAXIAL (I14)
816	1-783-439-11	o	CABLE ASSY, COAXIAL (I15)
817	3-191-747-01	o	SUPPORT (M3), HEXAGON
818	3-194-878-01	s	LEVER, PC BOARD
819	3-683-631-01	o	CLAMP
820	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3X6


HDS-7000 Board (4/4)

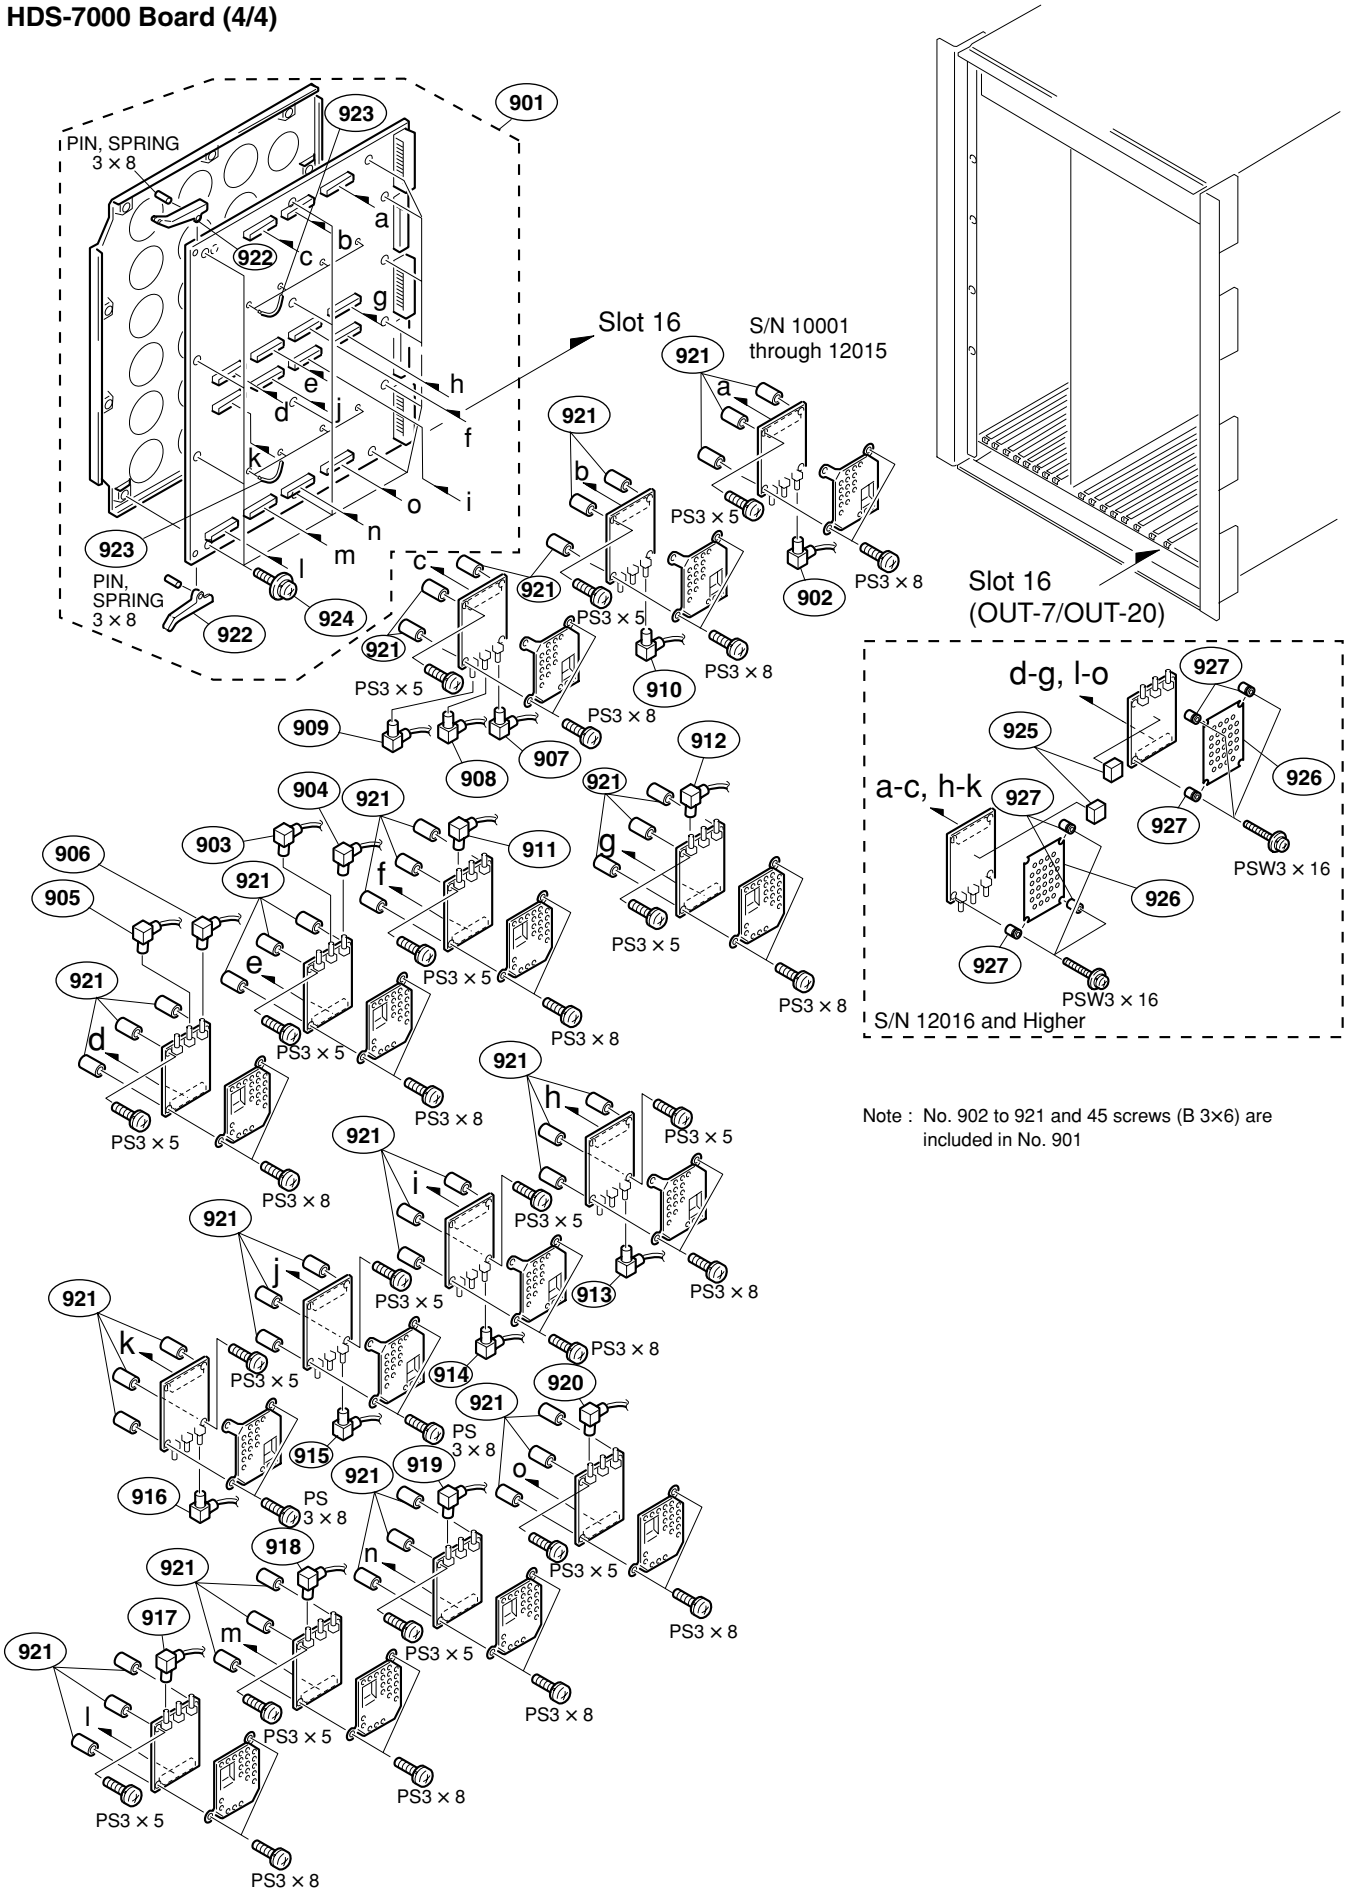

Note : No. 902 to 921 and 45 screws (B 3×6) are included in No. 901


No.	Part No.	SP	Description
901	A-8325-882-A	o	MOUNTED CIRCUIT BOARD, OUT-20B
	or A-8328-630-A	o	MOUNTED CIRCUIT BOARD, OUT-20C (For 24P System)
902	1-783-440-11	o	CABLE ASSY, COAXIAL (CLN)
903	1-783-441-11	o	CABLE ASSY, COAXIAL (1ME1)
904	1-783-442-12	o	CABLE ASSY, COAXIAL (1ME2)
905	1-783-443-11	o	CABLE ASSY, COAXIAL (2ME1)
906	1-783-444-11	o	CABLE ASSY, COAXIAL (2ME2)
907	1-783-445-11	o	CABLE ASSY, COAXIAL (PGM1)
908	1-783-446-11	o	CABLE ASSY, COAXIAL (PGM2)
909	1-783-447-11	o	CABLE ASSY, COAXIAL (PGM3)
910	1-783-448-11	o	CABLE ASSY, COAXIAL (PVW)
911	1-783-449-11	o	CABLE ASSY, COAXIAL (AX1)
912	1-783-450-11	o	CABLE ASSY, COAXIAL (AX2)
913	1-783-451-11	o	CABLE ASSY, COAXIAL (AX3)
914	1-783-452-11	o	CABLE ASSY, COAXIAL (AX4)
915	1-783-453-11	o	CABLE ASSY, COAXIAL (AX5)
916	1-783-454-11	o	CABLE ASSY, COAXIAL (AX6)
917	1-783-455-11	o	CABLE ASSY, COAXIAL (AX7)
918	1-783-456-11	o	CABLE ASSY, COAXIAL (AX8)
919	1-783-457-11	o	CABLE ASSY, COAXIAL (AX9)
920	1-783-458-11	o	CABLE ASSY, COAXIAL (AX10)
921	3-191-747-01	o	SUPPORT (M3), HEXAGON
922	3-194-878-01	s	LEVER, PC BOARD
923	3-683-631-01	o	CLAMP
924	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3X6
925	3-192-294-41	o	SHEET (SDI), RADIATION
926	3-205-406-01	o	HEAT SINK
927	3-205-407-01	o	BOSS

HKDS-7690A Front Panel

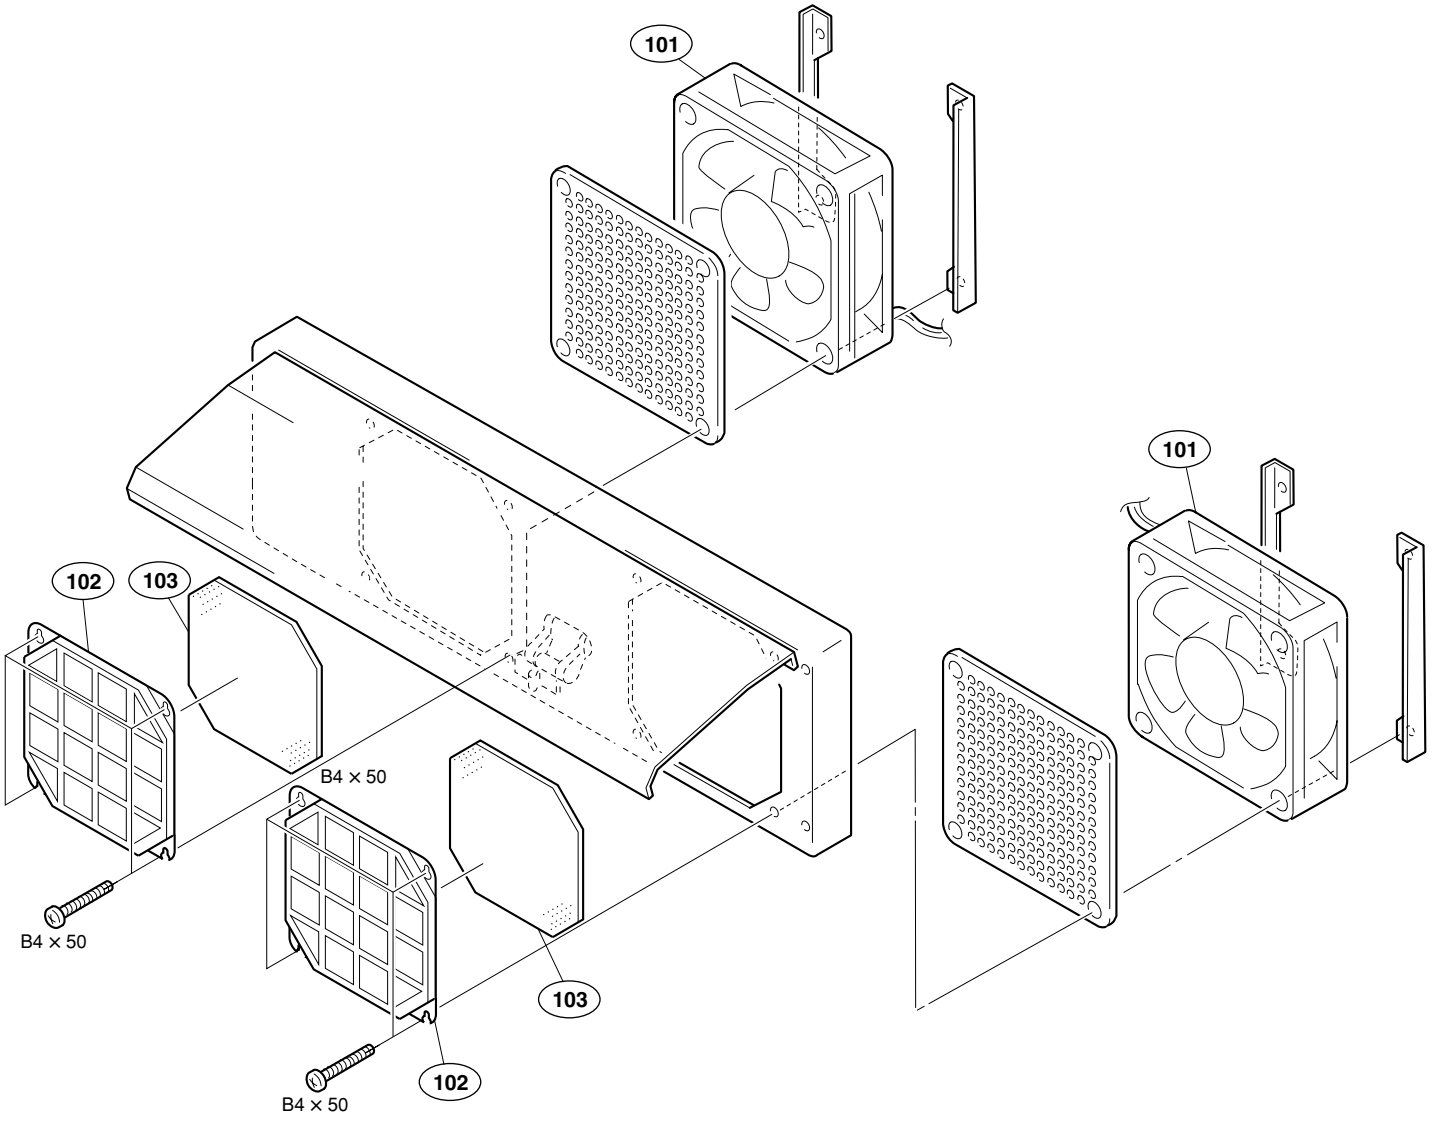

No.	Part No.	SP	Description
101	1-698-873-11	s	FAN, DC
102	3-633-699-01	o	COVER, FILTER
103	3-633-700-01	o	FILTER

HKDS-7690A Rear Panel

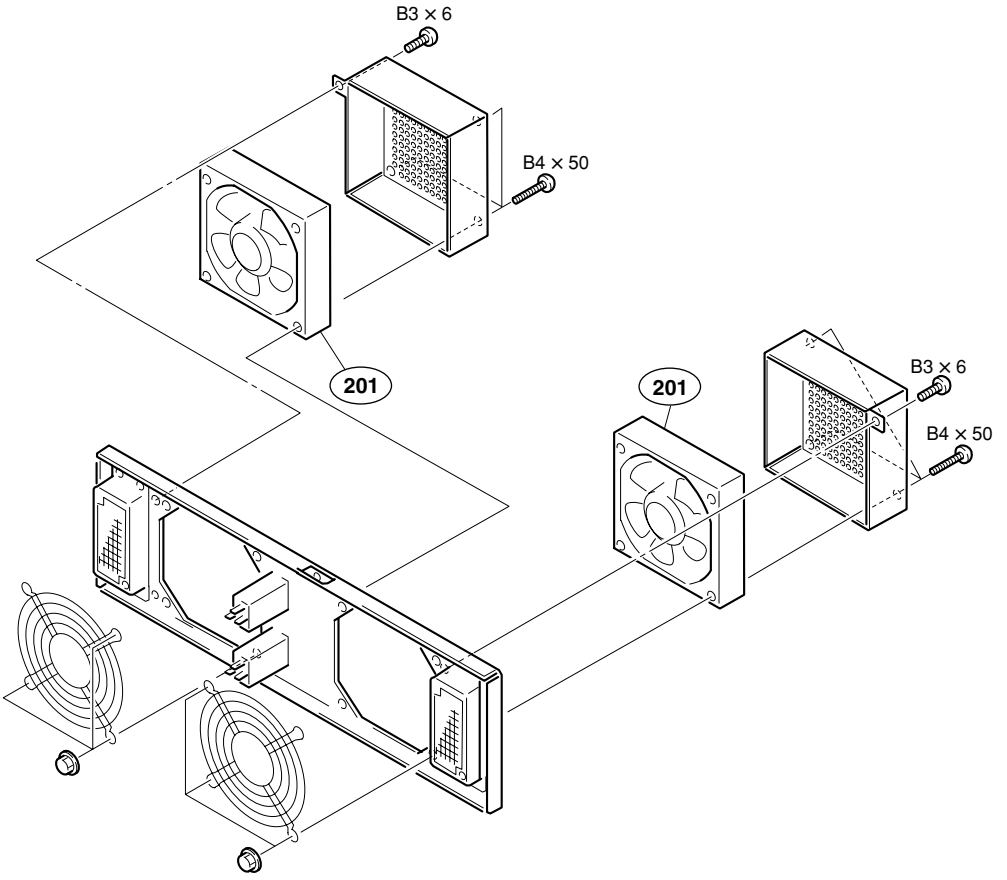

No. Part No. SP Description

201 1-698-873-11 s FAN, DC

3-3. Electrical Parts List

CKG-10 BOARD
---

*a:[Lot No. 710 - 801]
*b:[Lot No. 802 -]
*c:[Lot No. 710 - 805]
*d:[Lot No. 806 -]
*e:[Lot No. 710 - 001]
*f:[Lot No. 082 - 0B3]
*g:[Lot No. 0B4 -]
*h:[Lot No. 710 - 081]
*i:[Lot No. 082 -]
*j:[Lot No. 710 - 906]
*k:[Lot No. 907 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	*b A-8319-314-A	o	MOUNTED CIRCUIT BOARD, CKG-10A
	*a A-8319-518-A	o	MOUNTED CIRCUIT BOARD, CKG-10
3pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
1pc	3-194-878-01	s	LEVER, PC BOARD
11pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
6pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
1pc	7-626-320-11	s	PIN, SPRING 3x8
3pcs	7-682-547-04	s	SCREW +B 3x6
6pcs	7-685-104-21	s	SCREW +P 2x6 TYPE2 SLIT
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-038-00	s	CERAMIC 0.1uF 25V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-038-00	s	CERAMIC 0.1uF 25V
C6	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C7	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C8	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C9	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C12	1-163-135-00	s	CERAMIC, CHIP 560pF 5% 50V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C22	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C23	1-163-245-11	s	CERAMIC, CHIP 56pF 5% 50V
C24	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C25	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C26	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C27	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C28	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-107-823-11	s	CERAMIC 0.47uF 10% 16V

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-128-401-11	s	ELECT 100uF 20% 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C43	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C44	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C45	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C46	1-128-401-11	s	ELECT 100uF 20% 25V
C47	1-163-038-00	s	CERAMIC 0.1uF 25V
C48	1-163-038-00	s	CERAMIC 0.1uF 25V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-023-00	s	CERAMIC, CHIP 0.015uF 5% 50V
C53	1-163-038-00	s	CERAMIC 0.1uF 25V
C54	1-163-038-00	s	CERAMIC 0.1uF 25V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C57	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-107-823-11	s	CERAMIC 0.47uF 10% 16V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-113-00	s	CERAMIC, CHIP 68pF 5% 50V
C69	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C70	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C71	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C72	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C75	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C80	1-163-038-00	s	CERAMIC 0.1uF 25V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V
C85	1-163-113-00	s	CERAMIC, CHIP 68pF 5% 50V
C86	1-126-404-11	s	ELECT 4.7uF 20% 50V
C87	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C88	1-163-127-00	s	CERAMIC, CHIP 270pF 5% 50V
C89	1-163-131-00	s	CERAMIC, CHIP 390pF 5% 50V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-038-00	s	CERAMIC 0.1uF 25V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C98	1-128-401-11	s	ELECT 100uF 20% 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-038-00	s	CERAMIC 0.1uF 25V
C105	1-163-038-00	s	CERAMIC 0.1uF 25V
C106	1-163-038-00	s	CERAMIC 0.1uF 25V
C107	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C108	1-163-038-00	s	CERAMIC 0.1uF 25V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C111	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-038-00	s	CERAMIC 0.1uF 25V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-128-401-11	s	ELECT 100uF 20% 25V
C119	1-107-818-11	s	DOUBLE LAYERS 1F 5.5V
C120	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-038-00	s	CERAMIC 0.1uF 25V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-038-00	s	CERAMIC 0.1uF 25V
C133	1-163-038-00	s	CERAMIC 0.1uF 25V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-038-00	s	CERAMIC 0.1uF 25V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C138	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-038-00	s	CERAMIC 0.1uF 25V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C166	1-163-231-11	s	CERAMIC, CHIP 15pF 5% 50V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-038-00	s	CERAMIC 0.1uF 25V
C215	1-163-038-00	s	CERAMIC 0.1uF 25V

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-038-00	s	CERAMIC 0.1uF 25V
C220	1-163-038-00	s	CERAMIC 0.1uF 25V
C221	1-163-038-00	s	CERAMIC 0.1uF 25V
C222	1-163-038-00	s	CERAMIC 0.1uF 25V
C223	1-163-038-00	s	CERAMIC 0.1uF 25V
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-038-00	s	CERAMIC 0.1uF 25V
C226	1-163-038-00	s	CERAMIC 0.1uF 25V
C227	1-163-038-00	s	CERAMIC 0.1uF 25V
C228	1-163-038-00	s	CERAMIC 0.1uF 25V
C229	1-163-038-00	s	CERAMIC 0.1uF 25V
C230	1-163-038-00	s	CERAMIC 0.1uF 25V
C231	1-163-038-00	s	CERAMIC 0.1uF 25V
C232	1-163-038-00	s	CERAMIC 0.1uF 25V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-038-00	s	CERAMIC 0.1uF 25V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-038-00	s	CERAMIC 0.1uF 25V
C242	1-163-038-00	s	CERAMIC 0.1uF 25V
C243	1-163-038-00	s	CERAMIC 0.1uF 25V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-038-00	s	CERAMIC 0.1uF 25V
C250	1-163-038-00	s	CERAMIC 0.1uF 25V
C251	1-163-038-00	s	CERAMIC 0.1uF 25V
C252	1-163-038-00	s	CERAMIC 0.1uF 25V
C253	1-163-038-00	s	CERAMIC 0.1uF 25V
C254	1-163-038-00	s	CERAMIC 0.1uF 25V
C255	1-163-038-00	s	CERAMIC 0.1uF 25V
C256	1-163-038-00	s	CERAMIC 0.1uF 25V
C257	1-163-038-00	s	CERAMIC 0.1uF 25V
C258	1-163-038-00	s	CERAMIC 0.1uF 25V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C261	1-163-038-00	s	CERAMIC 0.1uF 25V
C262	1-163-038-00	s	CERAMIC 0.1uF 25V
CN2	1-764-615-11	s	CONNECTOR, BB 100P, FEMALE
CN3	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN4	1-764-615-11	s	CONNECTOR, BB 100P, FEMALE
CN5	1-566-311-11	s	CONNECTOR, 10P, MALE
CN6	1-764-615-11	s	CONNECTOR, BB 100P, FEMALE
CN7	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN8	1-750-889-11	s	CONNECTOR, D-SUB 15P, FEMALE
COP2	1-564-948-21	o	PIN, SHORTING
COP3	1-564-948-21	o	PIN, SHORTING
COP4	1-564-948-21	o	PIN, SHORTING
COP5	1-564-948-21	o	PIN, SHORTING

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
COP6	1-564-948-21	o	PIN, SHORTING
COP7	1-564-948-21	o	PIN, SHORTING
COR2	1-562-579-21	s	PLUG, SHORTING
COR3	1-562-579-21	s	PLUG, SHORTING
COR4	1-562-579-21	s	PLUG, SHORTING
COR5	1-562-579-21	s	PLUG, SHORTING
COR6	1-562-579-21	s	PLUG, SHORTING
COR7	1-562-579-21	s	PLUG, SHORTING
CP1	1-475-863-11	s	CONVERTER UNIT, DC-DC
D1	8-719-056-73	s	DIODE UDZ-TE-17-2.7B
D2 *k	8-719-901-75	s	DIODE 1SS88
D2 *j	8-719-070-39	s	DIODE 1N6263
D3	8-719-800-76	s	DIODE 1SS226
D4	8-719-800-76	s	DIODE 1SS226
D5	8-719-800-76	s	DIODE 1SS226
D6	8-719-800-76	s	DIODE 1SS226
D7	8-719-800-76	s	DIODE 1SS226
D8	8-719-800-76	s	DIODE 1SS226
D9	8-719-800-76	s	DIODE 1SS226
D10	8-719-800-76	s	DIODE 1SS226
D11	8-719-800-76	s	DIODE 1SS226
D12	8-719-800-76	s	DIODE 1SS226
D13	8-719-975-84	s	DIODE AY1101W-88
D14	8-719-975-84	s	DIODE AY1101W-88
D15	8-719-975-84	s	DIODE AY1101W-88
D16	8-719-987-09	s	DIODE PG1102W
D17	8-719-987-09	s	DIODE PG1102W
D18	8-719-987-09	s	DIODE PG1102W
D19	8-719-987-09	s	DIODE PG1102W
D20	8-719-987-09	s	DIODE PG1102W
D21	8-719-987-09	s	DIODE PG1102W
D22	8-719-987-09	s	DIODE PG1102W
D23	8-719-987-09	s	DIODE PG1102W
D24	8-719-987-09	s	DIODE PG1102W
D25	8-719-987-09	s	DIODE PG1102W
D26	8-719-987-09	s	DIODE PG1102W
D27	8-719-987-09	s	DIODE PG1102W
D28	8-719-987-09	s	DIODE PG1102W
D29	8-719-987-09	s	DIODE PG1102W
D30	8-719-987-09	s	DIODE PG1102W
F1 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F1 *c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F2 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F2 *c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F3 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F3 *c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F4 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F4 *c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F5 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F5 *c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F6 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F6 *c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
IC1	8-759-271-82	s	IC DS3695ATM
IC2	8-759-465-77	s	IC MC10E111FNR2
IC3	8-759-465-77	s	IC MC10E111FNR2
IC4	8-759-465-77	s	IC MC10E111FNR2
IC5	8-759-465-77	s	IC MC10E111FNR2

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC6	8-759-926-30	s	IC AM26LS30PC
IC7	8-759-528-72	s	IC DS96F174CJ
IC8	8-759-528-72	s	IC DS96F174CJ
IC9	8-759-528-72	s	IC DS96F174CJ
IC10	8-759-528-72	s	IC DS96F174CJ
IC11	8-759-469-98	s	IC CAT93C66K-LE10
IC12	8-759-181-33	s	IC EL2090CM
IC13	8-759-181-33	s	IC EL2090CM
IC14	8-759-271-78	s	IC DS26C32ATM
IC15	8-759-527-47	s	IC MC10ELT20D
IC16	8-759-367-26	s	IC MC10EL31DR2
IC17	8-759-367-26	s	IC MC10EL31DR2
IC18	8-759-367-26	s	IC MC10EL31DR2
IC19	8-759-367-25	s	IC MC10EL16DR2
IC20	8-759-528-67	s	IC LT1193CS8
IC21	8-759-245-00	s	IC TD62306F
IC22	8-759-505-00	s	IC CXD8052Q
IC23	8-759-523-45	s	IC TC74ACT244FT(EL)
IC24	8-759-527-52	s	IC SN74ABT541BPW-E05
IC25	8-759-367-26	s	IC MC10EL31DR2
IC26	8-759-523-94	s	IC TC74VHC32FT(EL)
IC27	8-759-700-78	s	IC NJM082M
IC28	8-759-527-46	s	IC LM319M
IC29	8-759-465-49	s	IC MC10ELT21DR2
IC30	8-759-465-49	s	IC MC10ELT21DR2
IC31	8-759-465-49	s	IC MC10ELT21DR2
IC32	8-759-700-78	s	IC NJM082M
IC33	8-759-523-07	s	IC TC74AC04FT(EL)
IC34	8-759-523-40	s	IC TC74ACT74FT(EL)
IC35	8-759-523-11	s	IC TC74AC74FT(EL)
IC36	8-759-523-05	s	IC TC74AC00FT(EL)
IC37	8-759-523-11	s	IC TC74AC74FT(EL)
IC38	8-759-524-18	s	IC TC74VHC163FT(EL)
IC39	8-759-524-18	s	IC TC74VHC163FT(EL)
IC40	8-759-524-18	s	IC TC74VHC163FT(EL)
IC41	8-759-523-39	s	IC TC74ACT32FT(EL)
IC42	8-759-523-40	s	IC TC74ACT74FT(EL)
IC43	8-759-523-38	s	IC TC74ACT14FT(EL)
IC44	8-759-523-37	s	IC TC74ACT08FT(EL)
IC45	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC46	8-759-523-11	s	IC TC74AC74FT(EL)
IC47	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC48	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC49	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC50	8-759-523-51	s	IC TC74ACT574FT(EL)
IC51	8-759-563-87	o	IC AM27C256-CKX-GEN-V2
IC52	8-759-523-51	s	IC TC74ACT574FT(EL)
IC53	8-759-523-51	s	IC TC74ACT574FT(EL)
IC54	8-759-523-05	s	IC TC74AC00FT(EL)
IC55	8-759-523-51	s	IC TC74ACT574FT(EL)
IC56	8-759-541-05	o	IC WS57C291-V-LOOP-V1
IC57	8-759-914-03	s	IC SN74LS06N
IC58	8-759-245-00	s	IC TD62306F
IC59	8-759-527-54	s	IC SN74ABT821APW-E05
IC60	8-759-523-51	s	IC TC74ACT574FT(EL)
IC61	8-759-524-18	s	IC TC74VHC163FT(EL)
IC62	8-759-524-18	s	IC TC74VHC163FT(EL)
IC63	8-759-524-18	s	IC TC74VHC163FT(EL)
IC64	8-759-541-03	o	IC WS57C291-H-LOOP-V1

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC65	8-759-472-94	s	IC MAX3241CAI-TE2
IC66	8-759-243-82	s	IC TC74AC151F
IC67	8-759-523-51	s	IC TC74ACT574FT(EL)
IC68	8-759-079-45	s	IC TC74AC283F
IC69	8-759-079-45	s	IC TC74AC283F
IC70	8-759-079-45	s	IC TC74AC283F
IC71	8-759-527-54	s	IC SN74ABT821APW-E05
IC72	8-759-946-63	s	IC SN74ALS541N
IC73	8-752-381-84	s	IC CXD1095BQ
IC74	8-759-505-06	s	IC CXD8058Q
IC75	8-759-527-44	s	IC MAX693ACSE
IC76 *h	8-759-534-76	o	IC MX27C4000MC-HDME7KV1
IC77	8-759-528-55	s	IC IDT74FCT162841ETPA
IC78 *h	8-759-527-52	s	IC SN74ABT541BPW-E05
IC79	8-759-504-23	s	IC RF5C62
IC80 *h	8-759-466-16	s	IC IDT7164S20Y-TL
IC81 *h	8-759-534-76	o	IC MX27C4000MC-HDME7KV1
IC82	8-759-528-55	s	IC IDT74FCT162841ETPA
IC83 *h	8-759-527-52	s	IC SN74ABT541BPW-E05
IC84 *h	8-759-466-16	s	IC IDT7164S20Y-TL
IC85 *h	8-759-466-16	s	IC IDT7164S20Y-TL
IC86 *h	8-759-190-63	s	IC CXD8841Q
IC87	8-759-180-50	s	IC MB89371AH-PF
IC88	8-759-553-90	o	IC MBM29F040C-90PFTN
IC89	8-759-553-90	o	IC MBM29F040C-90PFTN
IC90	8-759-553-90	o	IC MBM29F040C-90PFTN
IC91	8-759-553-90	o	IC MBM29F040C-90PFTN
IC92 *h	8-759-541-80	o	IC EPM7128-SPLINE-V1
IC93 *h	8-759-466-16	s	IC IDT7164S20Y-TL
IC94	8-759-523-36	s	IC TC74ACT04FT(EL)
IC95	8-759-523-39	s	IC TC74ACT32FT(EL)
IC96	8-759-527-53	s	IC SN74ABT245BPW-E05
IC97 *h	8-759-528-51	s	IC IDT74FCT162245CTPA
IC98 *h	8-759-528-51	s	IC IDT74FCT162245CTPA
IC99 *h	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC100 *h	8-759-527-52	s	IC SN74ABT541BPW-E05
IC101 *h	8-759-528-51	s	IC IDT74FCT162245CTPA
IC102 *h	8-759-528-51	s	IC IDT74FCT162245CTPA
IC103	8-759-527-53	s	IC SN74ABT245BPW-E05
IC104	8-759-528-42	s	IC IDT74FST3390Q
IC105 *i	8-759-696-98	o	IC EPM7192-CKG-A
*h	8-759-566-08	o	IC EPM7192-CKG-V2
IC106	8-759-527-53	s	IC SN74ABT245BPW-E05
IC107	8-759-528-42	s	IC IDT74FST3390Q
IC108 *h	8-759-973-43	s	IC MB8421-90LPFQ
IC109 *h	8-759-973-43	s	IC MB8421-90LPFQ
IC110 *h	8-759-973-43	s	IC MB8421-90LPFQ
IC111	8-759-389-26	s	IC 74LCX08MTCX
IC112	8-759-523-36	s	IC TC74ACT04FT(EL)
IC114	8-759-528-42	s	IC IDT74FST3390Q
IC115	8-759-528-42	s	IC IDT74FST3390Q
IC116	8-759-528-61	s	IC CY7C4221-25AC
IC117	8-759-528-61	s	IC CY7C4221-25AC
IC118	8-759-528-54	s	IC IDT74FCT162501ETPA
IC119	8-759-505-00	s	IC CXD8052Q
IC120	8-759-505-00	s	IC CXD8052Q
IC121	8-759-528-54	s	IC IDT74FCT162501ETPA
IC122	8-759-528-42	s	IC IDT74FST3390Q
IC123	8-759-528-42	s	IC IDT74FST3390Q

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC124	8-759-528-61	s	IC CY7C4221-25AC
IC125	8-759-528-61	s	IC CY7C4221-25AC
IC126	8-752-381-84	s	IC CXD1095BQ
IC127	8-759-528-54	s	IC IDT74FCT162501ETPA
IC128	8-759-528-42	s	IC IDT74FST3390Q
IC129	8-759-528-42	s	IC IDT74FST3390Q
IC130	8-759-528-61	s	IC CY7C4221-25AC
IC131	8-759-528-61	s	IC CY7C4221-25AC
IC132	8-759-528-42	s	IC IDT74FST3390Q
IC133	8-759-528-42	s	IC IDT74FST3390Q
IC134	8-759-505-00	s	IC CXD8052Q
IC135	8-759-505-00	s	IC CXD8052Q
IC136	8-759-528-54	s	IC IDT74FCT162501ETPA
IC137	8-759-528-61	s	IC CY7C4221-25AC
IC138	8-759-528-61	s	IC CY7C4221-25AC
IS7	*h 1-526-654-21	o	SOCKET, IC (DP) 16P
IS8	*h 1-526-654-21	o	SOCKET, IC (DP) 16P
IS9	*h 1-526-654-21	o	SOCKET, IC (DP) 16P
IS10	*h 1-526-654-21	o	SOCKET, IC (DP) 16P
IS51	*h 1-526-659-00	o	SOCKET, IC 28P
IS56	*h 1-526-816-21	s	SOCKET, IC (DP) 24P
IS64	*h 1-526-816-21	s	SOCKET, IC (DP) 24P
L1	1-414-108-11	s	INDUCTOR 0.68uH
L2	1-411-843-11	s	COIL, CHOKE 10uH
L3	1-411-843-11	s	COIL, CHOKE 10uH
L4	1-411-843-11	s	COIL, CHOKE 10uH
L5	1-411-843-11	s	COIL, CHOKE 10uH
L6	1-411-843-11	s	COIL, CHOKE 10uH
L7	1-411-843-11	s	COIL, CHOKE 10uH
L8	1-421-370-00	s	COIL, CHOKE
L9	1-411-843-11	s	COIL, CHOKE 10uH
L10	1-411-843-11	s	COIL, CHOKE 10uH
L11	1-411-843-11	s	COIL, CHOKE 10uH
L12	1-421-370-00	s	COIL, CHOKE
L13	1-421-370-00	s	COIL, CHOKE
L14	1-421-370-00	s	COIL, CHOKE
L15	1-421-370-00	s	COIL, CHOKE
L16	1-421-370-00	s	COIL, CHOKE
R1	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R2	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R3	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R4	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R5	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R6	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R7	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R8	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R9	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R10	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R11	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R12	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R13	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R14	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R15	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R16	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R17	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R18	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R19	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R20	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R21	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R22	1-216-629-11	s	METAL, CHIP 120 0.5% 1/10W
R23	1-216-625-11	s	METAL, CHIP 82 0.5% 1/10W
R24	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R25	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R26	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R27	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R28	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R29	1-216-629-11	s	METAL, CHIP 120 0.5% 1/10W
R30	1-216-625-11	s	METAL, CHIP 82 0.5% 1/10W
R31	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R32	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R33	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R34	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R35	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R36	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R37	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R38	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R39	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R40	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R41	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R42	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R43	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R44	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R45	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R46	1-216-658-11	s	METAL, CHIP 2k 0.5% 1/10W
R47	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R48	1-216-640-11	s	METAL, CHIP 360 0.5% 1/10W
R49	1-216-658-11	s	METAL, CHIP 2k 0.5% 1/10W
R50	1-216-658-11	s	METAL, CHIP 2k 0.5% 1/10W
R51	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R52	1-216-640-11	s	METAL, CHIP 360 0.5% 1/10W
R53	1-216-658-11	s	METAL, CHIP 2k 0.5% 1/10W
R54	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R55	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R56	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R57	1-216-639-11	s	METAL, CHIP 330 0.5% 1/10W
R58	1-216-639-11	s	METAL, CHIP 330 0.5% 1/10W
R59	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R60	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R61	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R62	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R63	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R64	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R65	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R66	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R67	1-216-658-11	s	METAL, CHIP 2k 0.5% 1/10W
R68	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R69	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R70	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R71	1-216-637-11	s	METAL, CHIP 270 0.5% 1/10W
R72	1-216-661-11	s	METAL, CHIP 2.7k 0.5% 1/10W
R73	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R74	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R75	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R76	1-218-776-11	s	METAL 1M 0.5% 1/10W
R77	1-216-644-11	s	METAL, CHIP 510 0.5% 1/10W
R78	1-216-663-11	s	METAL, CHIP 3.3k 0.5% 1/10W
R79	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R80	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W
R81	1-216-679-11	s	METAL, CHIP 15k 0.5% 1/10W
R82	1-216-679-11	s	METAL, CHIP 15k 0.5% 1/10W
R83	1-216-644-11	s	METAL, CHIP 510 0.5% 1/10W
R84	1-216-691-11	s	METAL, CHIP 47k 0.5% 1/10W
R85	1-216-691-11	s	METAL, CHIP 47k 0.5% 1/10W
R86	1-218-768-11	s	METAL 470k 0.5% 1/10W
R87	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R88	1-216-691-11	s	METAL, CHIP 47k 0.5% 1/10W
R89	1-216-683-11	s	METAL, CHIP 22k 0.5% 1/10W
R90	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R91	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R92	1-216-679-11	s	METAL, CHIP 15k 0.5% 1/10W
R93	1-216-679-11	s	METAL, CHIP 15k 0.5% 1/10W
R94	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R95	1-216-693-11	s	METAL, CHIP 56k 0.5% 1/10W
R96	1-216-671-11	s	METAL, CHIP 6.8k 0.5% 1/10W
R97	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R98	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R99	1-216-295-91	s	RES, CHIP 0
R100	1-216-295-91	s	RES, CHIP 0
R101	1-216-295-91	s	RES, CHIP 0
R102	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R103	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R104	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R105	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R106 *e	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R107	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R108	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R109	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R110	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R111	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R112	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R113	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R114	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R115	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R116	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R117	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R118	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R119	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R120	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R121	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R122	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R123	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R124	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R125	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R126	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R127	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R128	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R129	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R130	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R131	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R132	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R133	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R134	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R135	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R136	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R137	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R138	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R139	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R140	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R141	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R142	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R143	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R144	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R145	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R146	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R147	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R148	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R149	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R150	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R151	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R152	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R153	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R154	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R155	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R156	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R157	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R158	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R159	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R160	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R161	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R162	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R163	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R164	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R165	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R166	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R167	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R168	1-216-295-91	s	RES, CHIP 0
R169	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R170	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R171	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R172	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R173	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R174	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R175	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R176	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R177	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R178	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R179	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R180	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R181	1-216-637-11	s	METAL, CHIP 270 0.5% 1/10W
R182	1-218-776-11	s	METAL 1M 0.5% 1/10W
R183	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R184	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R185	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R186	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R187	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R188	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R189	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R190	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R191	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R192	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R193	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R194	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R195	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R196	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R197	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W

(CKG-10 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R198	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R199	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R200	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R201	1-216-295-91	s	RES, CHIP 0
R202	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R203	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R204	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R205	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R206	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R207	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R208	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R209	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R210	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R211	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R212	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R213	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R214	1-216-649-11	s	METAL, CHIP 820 0.5% 1/10W
R215	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R216	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R217	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R218	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R219	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R220	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R221	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R222	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R223	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R224	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R225	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R226	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R227	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R228	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R229	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R230	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R231	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R232	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R233	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R234	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R235	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R236	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R237	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R238	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R240 *g	1-215-465-00	s	RESISTOR, METAL FILM 68K 1/4W
*f	1-216-695-11	s	RESISTOR, CHIP 68K 1/10W(2012)
R300	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
RV1	1-238-853-11	s	RES, ADJ, CERMET 1k
RV2	1-238-853-11	s	RES, ADJ, CERMET 1k
RV3	1-238-855-11	s	RES, ADJ, CERMET 4.7k
RV4	1-238-856-11	s	RES, ADJ, CERMET 10k
RY1	1-515-716-11	s	RELAY (TQ2-5V)
RY2	1-515-716-11	s	RELAY (TQ2-5V)
RY3	1-515-716-11	s	RELAY (TQ2-5V)
RY4	1-515-716-11	s	RELAY (TQ2-5V)
RY5	1-515-716-11	s	RELAY (TQ2-5V)
S1	1-692-536-11	s	SWITCH, DIP 8-CKT
VCX1	1-767-329-11	s	CRYSTAL 74.17582400MHz
VCX2	1-767-328-11	s	CRYSTAL 74.2500000MHz
X1	1-760-622-21	s	CRYSTAL 32.76800000MHz
X2	1-760-464-11	s	CRYSTAL 4.91520000MHz

CKG-29 BOARD (For 24P System)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8328-364-A	s	MOUNTED CIRCUIT BOARD, CKG-29A
3pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
1pc	3-194-878-01	s	LEVER, PC BOARD
11pcs	4-886-821-11	s	SCREW,M3X6 CASE (SILVER)
6pcs	7-621-773-87	s	SCREW +B2.6X10(EP-FE/CU,NI,CR)
2pcs	7-622-207-05	s	NUT M2.6 TYPE2
1pc	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
3pcs	7-682-547-04	s	SCREW +B3X6
6pcs	7-685-104-21	s	SCREW,+PTP 2X6(EP-FE/ZN/CM2)
C1	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C6	1-163-222-11	s	CAPACITOR. CHIP CERAMIC 5.0PF
C7	1-163-222-11	s	CAPACITOR. CHIP CERAMIC 5.0PF
C8	1-163-222-11	s	CAPACITOR. CHIP CERAMIC 5.0PF
C9	1-163-222-11	s	CAPACITOR. CHIP CERAMIC 5.0PF
C10	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C11	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C12	1-163-135-00	s	CAPACITOR,CHIP CERAMIC 560PF
C13	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C14	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C15	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C16	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C17	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C18	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C19	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C20	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C22	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C23	1-163-245-11	s	CAPACITOR CERAMIC 56PF/50V
C24	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C25	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C26	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C27	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C28	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C29	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C32	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C33	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C35	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C36	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C37	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C38	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C39	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C41	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C43	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C44	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C45	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C46	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C47	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C48	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C49	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C50	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
C51	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C52	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C53	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C54	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C55	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C57	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C58	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C59	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C62	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C63	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C64	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C65	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C66	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C67	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C68	1-163-137-00	s	CAPACITOR,CHIP CERAMIC 680PF
C69	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C70	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C71	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C72	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C73	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C74	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C75	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C76	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C77	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C78	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C79	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C80	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C81	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C82	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C84	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C85	1-163-137-00	s	CAPACITOR,CHIP CERAMIC 680PF
C86	1-126-404-11	s	CAPACITOR,ELECT4.7MF/50V(CHIP)
C87	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C88	1-163-127-00	s	CAPACITOR,CHIP CERAMIC 270PF
C89	1-163-131-00	s	CAPACITOR,CHIP CERAMIC 390PF
C90	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C93	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C97	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C98	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C99	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C100	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C101	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C107	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C110	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C111	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C112	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C118	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C119	1-107-818-11	s	CAPACITOR,DOUBLE LAYERS 1F/5.5
C120	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C121	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
C122	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C130	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C134	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C137	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C138	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C139	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C140	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C141	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C142	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C143	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C144	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C145	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C146	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C147	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C148	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C149	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C150	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C152	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C153	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C154	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C155	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C158	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C159	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C160	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C161	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C162	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C163	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C164	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C165	1-163-235-11	s	CAPACITOR,CHIP CERAMIC22PF/50V
C166	1-163-231-11	s	CAPACITOR,CHIP CERAMIC15PF/50V
C167	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C168	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C169	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C170	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C171	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C172	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C173	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C174	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C175	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C176	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C178	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C179	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C180	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
C181	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C182	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C183	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C190	1-163-235-11	s	CAPACITOR,CHIP CERAMIC22PF/50V
C191	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C196	1-163-235-11	s	CAPACITOR,CHIP CERAMIC22PF/50V
C197	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C198	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C199	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C212	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C213	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C214	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C215	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C216	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C217	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C220	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C221	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C222	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C223	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C226	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C227	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C228	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C229	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C230	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C231	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C232	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C233	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C234	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C235	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C236	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C237	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C238	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C239	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C240	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C241	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C242	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C243	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C244	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C245	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C246	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C247	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C248	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C249	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C250	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C251	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C252	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C254	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C255	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C256	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C257	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C258	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C259	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C260	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
C261	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C262	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C270	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C271	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C272	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-126-404-11	s	CAPACITOR,ELECT4.7MF/50V(CHIP)
C500	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C501	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
CN2	1-764-615-11	s	CONNECTOR, BOARD TO BOARD 100P
CN3	1-770-600-11	s	CONNECTOR, BOARD TO BOARD 100P
CN4	1-764-615-11	s	CONNECTOR, BOARD TO BOARD 100P
CN5	1-566-311-11	s	HEADER 10P,CONNECTOR
CN6	1-764-615-11	s	CONNECTOR, BOARD TO BOARD 100P
CN7	1-770-600-11	s	CONNECTOR, BOARD TO BOARD 100P
CN8	1-750-889-11	s	CONNECTOR,D-SUB(ANGLE TYPE)15P
D1	8-719-056-73	s	DIODE UDZ-TE-17-2.7B
D2	8-719-901-75	s	DIODE 1SS88
D3	8-719-800-76	s	DIODE 1SS226
D4	8-719-800-76	s	DIODE 1SS226
D5	8-719-800-76	s	DIODE 1SS226
D6	8-719-800-76	s	DIODE 1SS226
D7	8-719-800-76	s	DIODE 1SS226
D8	8-719-800-76	s	DIODE 1SS226
D9	8-719-800-76	s	DIODE 1SS226
D10	8-719-800-76	s	DIODE 1SS226
D11	8-719-800-76	s	DIODE 1SS226
D12	8-719-800-76	s	DIODE 1SS226
D13	8-719-975-84	s	LED AY1101W
D14	8-719-975-84	s	LED AY1101W
D15	8-719-975-84	s	LED AY1101W
D16	8-719-987-09	s	LED PG1102W
D17	8-719-987-09	s	LED PG1102W
D18	8-719-987-09	s	LED PG1102W
D19	8-719-987-09	s	LED PG1102W
D20	8-719-987-09	s	LED PG1102W
D21	8-719-987-09	s	LED PG1102W
D22	8-719-987-09	s	LED PG1102W
D23	8-719-987-09	s	LED PG1102W
D24	8-719-987-09	s	LED PG1102W
D25	8-719-987-09	s	LED PG1102W
D26	8-719-987-09	s	LED PG1102W
D27	8-719-987-09	s	LED PG1102W
D28	8-719-987-09	s	LED PG1102W
D29	8-719-987-09	s	LED PG1102W
D30	8-719-987-09	s	LED PG1102W
D31	8-719-987-09	s	LED PG1102W
F1	⚠ 1-533-707-11	s	CIRCUIT PROTECTER 10A (CHIP)
F2	⚠ 1-533-707-11	s	CIRCUIT PROTECTER 10A (CHIP)
F3	⚠ 1-533-707-11	s	CIRCUIT PROTECTER 10A (CHIP)
F4	⚠ 1-533-707-11	s	CIRCUIT PROTECTER 10A (CHIP)
F5	⚠ 1-533-707-11	s	CIRCUIT PROTECTER 10A (CHIP)
IC1	8-759-271-82	s	IC DS3695ATM
IC2	8-759-465-77	s	IC MC10E111FNR2
IC3	8-759-465-77	s	IC MC10E111FNR2
IC4	8-759-465-77	s	IC MC10E111FNR2
IC5	8-759-465-77	s	IC MC10E111FNR2
IC6	8-759-926-30	s	IC AM26LS30PC

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
IC7	8-759-528-72	s	IC DS96F174CJ
IC8	8-759-528-72	s	IC DS96F174CJ
IC9	8-759-528-72	s	IC DS96F174CJ
IC10	8-759-528-72	s	IC DS96F174CJ
IC11	8-759-469-98	s	IC CAT93C66K-LE10
IC12	8-759-181-33	s	IC EL2090CM
IC13	8-759-181-33	s	IC EL2090CM
IC14	8-759-271-78	s	IC DS26C32ATM
IC15	8-759-527-47	s	IC MC10ELT20D
IC16	8-759-367-26	s	IC MC10EL31DR2
IC17	8-759-367-26	s	IC MC10EL31DR2
IC18	8-759-367-26	s	IC MC10EL31DR2
IC19	8-759-367-25	s	IC MC10EL16DR2
IC20	8-759-528-67	s	IC LT1193CS8
IC21	8-759-245-00	s	IC TD62306F
IC22	8-759-505-00	s	IC CXD8052Q
IC23	8-759-523-45	s	IC TC74ACT244FT(EL)
IC24	6-701-903-01	s	IC SN74ABT541BPWR
IC25	8-759-367-26	s	IC MC10EL31DR2
IC26	8-759-523-94	s	IC TC74VHC32FT(EL)
IC27	8-759-700-78	s	IC NJM082M
IC28	8-759-527-46	s	IC LM319M
IC29	8-759-465-49	s	IC MC10ELT21DR2
IC30	8-759-465-49	s	IC MC10ELT21DR2
IC31	8-759-465-49	s	IC MC10ELT21DR2
IC32	8-759-700-78	s	IC NJM082M
IC33	8-759-523-07	s	IC TC74AC04FT(EL)
IC34	8-759-523-40	s	IC TC74ACT74FT(EL)
IC35	8-759-523-11	s	IC TC74AC74FT(EL)
IC36	8-759-523-05	s	IC TC74AC00FT(EL)
IC37	8-759-523-11	s	IC TC74AC74FT(EL)
IC38	8-759-524-18	s	IC TC74VHC163FT(EL)
IC39	8-759-524-18	s	IC TC74VHC163FT(EL)
IC40	8-759-524-18	s	IC TC74VHC163FT(EL)
IC41	8-759-523-39	s	IC TC74ACT32FT(EL)
IC42	8-759-523-40	s	IC TC74ACT74FT(EL)
IC43	8-759-523-38	s	IC TC74ACT14FT(EL)
IC44	8-759-523-37	s	IC TC74ACT08FT(EL)
IC45	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC46	8-759-523-11	s	IC TC74AC74FT(EL)
IC47	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC48	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC49	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC50	8-759-523-51	s	IC TC74ACT574FT(EL)
IC51	8-759-563-87	o	IC AM27C256-CKX-GEN-V2
IC52	8-759-523-51	s	IC TC74ACT574FT(EL)
IC53	8-759-523-51	s	IC TC74ACT574FT(EL)
IC54	8-759-523-05	s	IC TC74AC00FT(EL)
IC55	8-759-523-51	s	IC TC74ACT574FT(EL)
IC56	8-759-656-65	o	IC WS57C291-HTPLL-V2
IC57	8-759-914-03	s	IC SN74LS06N
IC58	8-759-245-00	s	IC TD62306F
IC59	8-759-583-60	s	IC IDT74FCT821ATPY-TL
IC60	8-759-523-51	s	IC TC74ACT574FT(EL)
IC61	8-759-524-18	s	IC TC74VHC163FT(EL)
IC62	8-759-524-18	s	IC TC74VHC163FT(EL)
IC63	8-759-524-18	s	IC TC74VHC163FT(EL)
IC64	8-759-656-64	o	IC CY7C263-HSYNC-V2
IC65	8-759-472-94	s	IC MAX3241CAI-TE2

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
IC66	8-759-243-82	s	IC TC74AC151F
IC67	8-759-523-51	s	IC TC74ACT574FT(EL)
IC68	8-759-079-45	s	IC TC74AC283F
IC69	8-759-079-45	s	IC TC74AC283F
IC70	8-759-079-45	s	IC TC74AC283F
IC71	8-759-583-60	s	IC IDT74FCT821ATPY-TL
IC72	8-759-946-63	s	IC SN74ALS541N
IC73	8-752-381-84	s	IC CXD1095BQ
IC74	8-759-505-06	s	IC CXD8058Q
IC75	8-759-527-44	s	IC MAX693ACSE
IC77	8-759-831-65	s	IC PI74FCT162841ETA
IC79	8-759-504-23	s	IC RF5C62
IC82	8-759-831-65	s	IC PI74FCT162841ETA
IC87	8-759-180-50	s	IC MB89371AH-PF
IC88	8-759-553-90	s	IC MBM29F040C-90PFTN
IC89	8-759-553-90	s	IC MBM29F040C-90PFTN
IC90	8-759-553-90	s	IC MBM29F040C-90PFTN
IC91	8-759-553-90	s	IC MBM29F040C-90PFTN
IC94	8-759-523-36	s	IC TC74ACT04FT(EL)
IC95	8-759-523-39	s	IC TC74ACT32FT(EL)
IC96	8-759-689-73	s	IC SN74ABT245BPW (R)
IC103	8-759-689-73	s	IC SN74ABT245BPW (R)
IC104	8-759-528-42	s	IC IDT74FST3390Q
IC105	8-759-696-98	o	IC EPM7192-CKG-A
IC106	8-759-689-73	s	IC SN74ABT245BPW (R)
IC107	8-759-528-42	s	IC IDT74FST3390Q
IC111	8-759-389-26	s	IC 74LCX08MTCX
IC112	8-759-523-36	s	IC TC74ACT04FT(EL)
IC114	8-759-528-42	s	IC IDT74FST3390Q
IC115	8-759-528-42	s	IC IDT74FST3390Q
IC116	8-759-528-61	s	IC CY7C4221-25AC
IC117	8-759-528-61	s	IC CY7C4221-25AC
IC118	8-759-831-67	s	IC PI74FCT162501ETA
IC119	8-759-505-00	s	IC CXD8052Q
IC120	8-759-505-00	s	IC CXD8052Q
IC121	8-759-831-67	s	IC PI74FCT162501ETA
IC122	8-759-528-42	s	IC IDT74FST3390Q
IC123	8-759-528-42	s	IC IDT74FST3390Q
IC124	8-759-528-61	s	IC CY7C4221-25AC
IC125	8-759-528-61	s	IC CY7C4221-25AC
IC126	8-752-381-84	s	IC CXD1095BQ
IC127	8-759-831-67	s	IC PI74FCT162501ETA
IC128	8-759-528-42	s	IC IDT74FST3390Q
IC129	8-759-528-42	s	IC IDT74FST3390Q
IC130	8-759-528-61	s	IC CY7C4221-25AC
IC131	8-759-528-61	s	IC CY7C4221-25AC
IC132	8-759-528-42	s	IC IDT74FST3390Q
IC133	8-759-528-42	s	IC IDT74FST3390Q
IC134	8-759-505-00	s	IC CXD8052Q
IC135	8-759-505-00	s	IC CXD8052Q
IC136	8-759-831-67	s	IC PI74FCT162501ETA
IC137	8-759-528-61	s	IC CY7C4221-25AC
IC138	8-759-528-61	s	IC CY7C4221-25AC
IC300	8-759-593-42	s	IC GS4982-CKA
IC301	8-759-524-18	s	IC TC74VHC163FT(EL)
IC302	8-759-523-43	s	IC TC74ACT157FT(EL)
IC303	8-759-505-06	s	IC CXD8058Q
IC304	8-759-523-43	s	IC TC74ACT157FT(EL)
IC305	8-759-523-97	s	IC TC74VHC123AFT(EL)

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
IC306	8-759-523-07	s	IC TC74AC04FT(EL)
L1	1-414-108-11	s	MICRO INDUCTOR 0.68UH
L2	1-411-843-11	s	COIL, CHOKE 10UH
L3	1-411-843-11	s	COIL, CHOKE 10UH
L4	1-411-843-11	s	COIL, CHOKE 10UH
L5	1-411-843-11	s	COIL, CHOKE 10UH
L6	1-411-843-11	s	COIL, CHOKE 10UH
L7	1-411-843-11	s	COIL, CHOKE 10UH
L8	1-421-370-00	s	COIL,CHOKE
L9	1-411-843-11	s	COIL, CHOKE 10UH
L10	1-411-843-11	s	COIL, CHOKE 10UH
L11	1-411-843-11	s	COIL, CHOKE 10UH
L12	1-421-370-00	s	COIL,CHOKE
L13	1-421-370-00	s	COIL,CHOKE
L14	1-421-370-00	s	COIL,CHOKE
L16	1-421-370-00	s	COIL,CHOKE
R1	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R2	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R3	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R4	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R5	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R6	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R7	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R8	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R9	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R10	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R11	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R12	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R13	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R14	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R15	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R16	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R17	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R18	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R19	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R20	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R21	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R22	1-216-629-11	s	RESISTOR,CHIP 120 1/10W (2012)
R23	1-216-625-11	s	RESISTOR,CHIP 82 1/10W
R24	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R25	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R26	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R27	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R28	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R29	1-216-629-11	s	RESISTOR,CHIP 120 1/10W (2012)
R30	1-216-625-11	s	RESISTOR,CHIP 82 1/10W
R31	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R32	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R33	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R34	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R35	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R36	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R37	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R38	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R39	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R40	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R41	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R42	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
R43	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R44	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R45	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R46	1-216-658-11	s	RESISTOR,CHIP 2.0K 1/10W(2012)
R47	1-216-638-11	s	RESISTOR,CHIP 300 1/10W (2012)
R48	1-216-640-11	s	RESISTOR,CHIP 360 1/10W
R49	1-216-658-11	s	RESISTOR,CHIP 2.0K 1/10W(2012)
R50	1-216-658-11	s	RESISTOR,CHIP 2.0K 1/10W(2012)
R51	1-216-638-11	s	RESISTOR,CHIP 300 1/10W (2012)
R52	1-216-640-11	s	RESISTOR,CHIP 360 1/10W
R53	1-216-658-11	s	RESISTOR,CHIP 2.0K 1/10W(2012)
R54	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R55	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R56	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R57	1-216-639-11	s	RESISTOR,CHIP 330 1/10W (2012)
R58	1-216-639-11	s	RESISTOR,CHIP 330 1/10W (2012)
R59	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R60	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R61	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R62	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R63	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R64	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R65	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R66	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R67	1-216-658-11	s	RESISTOR,CHIP 2.0K 1/10W(2012)
R68	1-216-638-11	s	RESISTOR,CHIP 300 1/10W (2012)
R69	1-216-638-11	s	RESISTOR,CHIP 300 1/10W (2012)
R70	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R73	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R74	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R75	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R76	1-216-121-00	s	RESISTOR CHIP 1M 1/10W(2012)
R77	1-216-644-11	s	RESISTOR,CHIP 510 1/10W (2012)
R78	1-216-663-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R79	1-216-686-11	s	RESISTOR,CHIP 30K 1/10W
R80	1-216-686-11	s	RESISTOR,CHIP 30K 1/10W
R81	1-216-679-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R82	1-216-679-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R83	1-216-644-11	s	RESISTOR,CHIP 510 1/10W (2012)
R84	1-216-691-11	s	RESISTOR,CHIP 47K 1/10W(2012)
R85	1-216-691-11	s	RESISTOR,CHIP 47K 1/10W(2012)
R86	1-216-113-00	s	RESISTOR CHIP 470K 1/10W(2012)
R87	1-216-667-11	s	RESISTOR,CHIP 4.7K 1/10W(2012)
R88	1-216-691-11	s	RESISTOR,CHIP 47K 1/10W(2012)
R89	1-216-683-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R90	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R91	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R92	1-216-679-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R93	1-216-679-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R94	1-216-667-11	s	RESISTOR,CHIP 4.7K 1/10W(2012)
R95	1-216-693-11	s	RESISTOR CHIP 56K 1/10W (2012)
R96	1-216-671-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R97	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R98	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R99	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R100	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R101	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R102	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R103	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
R104	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R105	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R107	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R108	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R109	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R110	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R111	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R112	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R113	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R114	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R115	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R116	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R117	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R118	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R119	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R120	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R121	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R122	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R123	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R124	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R125	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R126	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R127	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R128	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R129	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R130	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R131	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R132	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R133	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R134	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R135	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R138	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R140	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R141	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R142	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R144	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R145	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R146	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R147	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R148	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R149	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R150	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R151	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R152	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R153	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R154	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R155	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R156	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R157	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R158	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R159	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R160	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R161	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R162	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R163	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R164	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R165	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R166	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R167	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
R169	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R170	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R171	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R179	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R180	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R181	1-216-637-11	s	RESISTOR,CHIP 270 1/10W (2012)
R182	1-216-121-00	s	RESISTOR CHIP 1M 1/10W(2012)
R184	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R185	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R186	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R187	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R188	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R189	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R190	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R191	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R192	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R193	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R194	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R195	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R196	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R197	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R198	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R199	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R200	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R201	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R202	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R203	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R204	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R205	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R206	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R207	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R208	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R209	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R210	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R211	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R212	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R213	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R214	1-216-649-11	s	RESISTOR,CHIP 820 1/10W (2012)
R215	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R216	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R217	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R218	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R219	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R220	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R221	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R222	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R223	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R224	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R225	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R226	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R227	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R228	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R229	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R230	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R231	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R232	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R233	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R234	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R235	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)

(CKG-29 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
R236	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R237	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R238	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R245	1-215-389-00	s	RESISTOR,METAL FILM 47 1/4W
R246	1-215-381-00	s	RESISTOR,METAL FILM 22 1/4W
R253	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R254	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R255	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R300	1-218-761-11	s	RESISTOR,CHIP 240K 1/10W(2012)
R301	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R302	1-216-625-11	s	RESISTOR,CHIP 82 1/10W
R303	1-216-629-11	s	RESISTOR,CHIP 120 1/10W (2012)
R305	1-216-647-11	s	RESISTOR,CHIP 680 1/10W (2012)
R306	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R307	1-216-647-11	s	RESISTOR,CHIP 680 1/10W (2012)
R308	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R310	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R311	1-216-099-00	s	RESISTOR,CHIP 120K 1/10W(2012)
R312	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R500	1-218-761-11	s	RESISTOR,CHIP 240K 1/10W(2012)
R501	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
RY1	1-515-716-11	s	RELAY
RY2	1-515-716-11	s	RELAY
RY3	1-515-716-11	s	RELAY
RY4	1-515-716-11	s	RELAY
RY5	1-515-716-11	s	RELAY
RY15	1-515-716-11	s	RELAY
RY16	1-515-716-11	s	RELAY
RY17	1-515-716-11	s	RELAY
S1	1-692-536-11	s	SWITCH DIP (8P)
VCX01	1-767-329-11	s	OSCILLATOR, CRYSTAL
VCX02	1-767-328-11	s	OSCILLATOR, CRYSTAL
VCX03	1-781-583-11	s	OSCILLATOR, CRYSTAL
VCX04	1-781-582-11	s	OSCILLATOR, CRYSTAL
VCX05	1-781-584-11	s	OSCILLATOR, CRYSTAL
X1	1-760-622-21	s	VIBRATOR, CRYSTAL
X2	1-760-464-11	s	VIBRATOR, CRYSTAL

CN-1439 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-479-A	o	MOUNTED CIRCUIT BOARD, CN-1439
28pcs	3-673-910-21	o	SCREW, CONNECTOR
9pcs	7-682-547-04	s	SCREW +B 3x6
CN11	1-764-274-11	s	CONNECTOR, BNC, FEMALE
CN12	1-764-274-11	s	CONNECTOR, BNC, FEMALE
CN13	1-764-274-11	s	CONNECTOR, BNC, FEMALE
CN101	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN102	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN103	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN104	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN105	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN106	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN107	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN108	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN109	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN110	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN111	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN112	1-563-890-21	s	CONNECTOR, D-SUB 9P, FEMALE
CN113	1-563-891-21	s	CONNECTOR, D-SUB 25P, FEMALE
CN114	1-563-891-21	s	CONNECTOR, D-SUB 25P, FEMALE
CN115	1-563-826-31	s	CONNECTOR, D-SUB 15P, FEMALE
L1	1-410-802-11	s	INDUCTOR, CHIP 39uH
L2	1-410-802-11	s	INDUCTOR, CHIP 39uH
R1	1-216-603-11	s	METAL, CHIP 10 0.5% 1/10W

CN-1539 BOARD
---

*a:[Lot No. 710 - 805]
*b:[Lot No. 806 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-481-A	o	MOUNTED CIRCUIT BOARD, CN-1539
CN4	1-560-366-00	o	CONNECTOR, ILG 4P, MALE
CN5	1-560-365-00	o	CONNECTOR, ILG 3P, MALE
CN6	1-560-365-00	o	CONNECTOR, ILG 3P, MALE
CN7	1-560-365-00	o	CONNECTOR, ILG 3P, MALE
D1	8-719-801-78	s	DIODE 1SS184
D2	8-719-801-78	s	DIODE 1SS184
F1 *b ⚠	1-533-275-21	s	FUSE 5A 125V
FL1 *b	1-236-071-11	s	FILTER, EMI
*a	1-233-289-21	s	FILTER, EMI
FL2 *b	1-236-071-11	s	FILTER, EMI
*a	1-233-289-21	s	FILTER, EMI
FL3 *b	1-236-071-11	s	FILTER, EMI
*a	1-233-289-21	s	FILTER, EMI
FL4 *b	1-236-071-11	s	FILTER, EMI
*a	1-233-289-21	s	FILTER, EMI
FL5 *b	1-236-071-11	s	FILTER, EMI
*a	1-233-289-21	s	FILTER, EMI
FL6 *b	1-236-071-11	s	FILTER, EMI
*a	1-233-289-21	s	FILTER, EMI
R1	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R2	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R3	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W

CN-1700 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8318-569-A	o	MOUNTED CIRCUIT BOARD, CN-1700
CN1	1-560-366-00	o	CONNECTOR, ILG 4P, MALE
CN2	1-560-366-00	o	CONNECTOR, ILG 4P, MALE

CN-1701 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8318-570-A	o	MOUNTED CIRCUIT BOARD, CN-1701
CN8	1-691-959-11	o	CONNECTOR 4P, MALE
CN9	1-560-366-00	o	CONNECTOR, ILG 4P, MALE
CN10	1-560-366-00	o	CONNECTOR, ILG 4P, MALE
CN11	1-560-366-00	o	CONNECTOR, ILG 4P, MALE

CPU-183 BOARD
---

*a:[Lot No. 710 - 801]
*b:[Lot No. 802 -]
*c:[Lot No. 710 - 805]
*d:[Lot No. 806 -]
*e:[Lot No. 710 - 906]
*f:[Lot No. 907 -]
*g:[Lot No. 710 - 0B3]
*h:[Lot No. 0B4 -]
*i:[Lot No. 710 - 002]
*j:[Lot No. 802 - 906]
*k:[Lot No. 907 - 081]
*m:[Lot No. 003 - 151]
*n:[Lot No. 710 - 151]
*o:[Lot No. 152 -]
*p:[Lot No. 907 - 151]
*q:[Lot No. 1A1 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8321-747-A	o	MOUNTED CIRCUIT BOARD, CPU-183A
6pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
1pc	3-194-878-01	s	LEVER, PC BOARD
2pcs	7-621-773-87	s	SCREW +B 2.6x10
6pcs *a	7-622-205-05	s	NUT, M2 TYPE2
2pcs	7-622-207-05	s	N 2.6, TYPE 2
1pc	7-626-320-11	s	PIN, SPRING 3x8
6pcs	7-682-547-04	s	SCREW +B 3x6
6pcs *b	7-685-104-21	s	SCREW +P 2x6 TYPE2 SLIT
*a	7-621-772-48	s	SCREW +B 2x8
C1	1-128-401-11	s	ELECT 100uF 20% 25V
C2 *n	1-128-401-11	s	ELECT 100uF 20% 25V
C3 *i	1-128-401-11	s	ELECT 100uF 20% 25V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-038-00	s	CERAMIC 0.1uF 25V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7	1-163-038-00	s	CERAMIC 0.1uF 25V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C11	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C21	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-163-038-00	s	CERAMIC 0.1uF 25V
C25	1-163-038-00	s	CERAMIC 0.1uF 25V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-163-038-00	s	CERAMIC 0.1uF 25V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C31	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C43	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-038-00	s	CERAMIC 0.1uF 25V
C48	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C49	1-126-402-11	s	ELECT, CHIP 2.2uF 20% 50V
C50	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C51	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C52	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C53	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C54	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C55	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C78	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-038-00	s	CERAMIC 0.1uF 25V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-163-038-00	s	CERAMIC 0.1uF 25V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-038-00	s	CERAMIC 0.1uF 25V
C105	1-163-038-00	s	CERAMIC 0.1uF 25V
C106	1-163-038-00	s	CERAMIC 0.1uF 25V
C107	1-163-038-00	s	CERAMIC 0.1uF 25V
C108	1-163-038-00	s	CERAMIC 0.1uF 25V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-038-00	s	CERAMIC 0.1uF 25V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-163-038-00	s	CERAMIC 0.1uF 25V
C119	1-163-038-00	s	CERAMIC 0.1uF 25V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-038-00	s	CERAMIC 0.1uF 25V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-038-00	s	CERAMIC 0.1uF 25V
C133	1-163-038-00	s	CERAMIC 0.1uF 25V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-038-00	s	CERAMIC 0.1uF 25V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C138	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-038-00	s	CERAMIC 0.1uF 25V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-038-00	s	CERAMIC 0.1uF 25V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-038-00	s	CERAMIC 0.1uF 25V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C215	1-163-038-00	s	CERAMIC 0.1uF 25V
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-038-00	s	CERAMIC 0.1uF 25V
C220	1-163-038-00	s	CERAMIC 0.1uF 25V
C221	1-163-038-00	s	CERAMIC 0.1uF 25V
C222	1-163-038-00	s	CERAMIC 0.1uF 25V
C223	1-163-038-00	s	CERAMIC 0.1uF 25V
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-038-00	s	CERAMIC 0.1uF 25V
C226	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C227	1-163-038-00	s	CERAMIC 0.1uF 25V
C228	1-163-038-00	s	CERAMIC 0.1uF 25V
C229	1-163-038-00	s	CERAMIC 0.1uF 25V
C230	1-163-038-00	s	CERAMIC 0.1uF 25V

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C231	1-163-038-00	s	CERAMIC 0.1uF 25V
C232	1-163-038-00	s	CERAMIC 0.1uF 25V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-038-00	s	CERAMIC 0.1uF 25V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-038-00	s	CERAMIC 0.1uF 25V
C242	1-164-344-11	s	CERAMIC, CHIP 0.068uF 10% 25V
C243	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-038-00	s	CERAMIC 0.1uF 25V
C250	1-163-038-00	s	CERAMIC 0.1uF 25V
C251	1-163-038-00	s	CERAMIC 0.1uF 25V
C252	1-163-038-00	s	CERAMIC 0.1uF 25V
C253	1-163-038-00	s	CERAMIC 0.1uF 25V
C254	1-163-038-00	s	CERAMIC 0.1uF 25V
C255	1-163-038-00	s	CERAMIC 0.1uF 25V
C256	1-163-038-00	s	CERAMIC 0.1uF 25V
C257	1-163-038-00	s	CERAMIC 0.1uF 25V
C258	1-163-038-00	s	CERAMIC 0.1uF 25V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C261	1-163-038-00	s	CERAMIC 0.1uF 25V
C262	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C263	1-163-038-00	s	CERAMIC 0.1uF 25V
C264	1-163-038-00	s	CERAMIC 0.1uF 25V
C265	1-163-038-00	s	CERAMIC 0.1uF 25V
C266	1-163-038-00	s	CERAMIC 0.1uF 25V
C267	1-163-038-00	s	CERAMIC 0.1uF 25V
C268	1-163-038-00	s	CERAMIC 0.1uF 25V
C269	1-163-038-00	s	CERAMIC 0.1uF 25V
C270	1-163-038-00	s	CERAMIC 0.1uF 25V
C271	1-163-038-00	s	CERAMIC 0.1uF 25V
C272	1-163-038-00	s	CERAMIC 0.1uF 25V
C273	1-163-038-00	s	CERAMIC 0.1uF 25V
C274	1-163-038-00	s	CERAMIC 0.1uF 25V
C275	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-038-00	s	CERAMIC 0.1uF 25V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C279	1-163-038-00	s	CERAMIC 0.1uF 25V
C280	1-163-038-00	s	CERAMIC 0.1uF 25V
C281	1-163-038-00	s	CERAMIC 0.1uF 25V
C282	1-163-038-00	s	CERAMIC 0.1uF 25V
C283	1-163-038-00	s	CERAMIC 0.1uF 25V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C292	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V
C300 *k	1-163-231-11	s	CAPACITOR, CHIP CERAMIC 15PF/50V
C310	1-117-231-11	s	CAPACITOR, (SMD) 9.8MF 16V
C311	1-117-231-11	s	CAPACITOR, (SMD) 9.8MF 16V
C315 *m	1-126-767-11	s	CAPACITOR, ELECT 1000MF/16V
C401 *o	1-126-935-11	s	CAPACITOR, ELECT 470MF/16V
C402 *o	1-126-935-11	s	CAPACITOR, ELECT 470MF/16V
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN3	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN4	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN5	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN6	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN7	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN8 *n	1-563-826-21	s	CONNECTOR D-SUB 15P, FEMALE
CN9	1-506-484-11	s	CONNECTOR 5P, MALE
CN10	1-564-013-11	o	CONNECTOR 3P, MALE
CN11 *o	1-566-311-11	s	HEADER 10P, CONNECTOR
CNA1	1-764-645-11	s	CONNECTOR, BB 100P, MALE
CNA2	1-764-645-11	s	CONNECTOR, BB 100P, MALE
CNA3	1-764-645-11	s	CONNECTOR, BB 100P, MALE
COP1 *n	1-564-948-21	o	PIN, SHORTING
COP2 *n	1-566-311-11	s	CONNECTOR, 10P, MALE
COP3	1-564-948-21	o	PIN, SHORTING
COP4	1-564-948-21	o	PIN, SHORTING
COP5	1-564-948-21	o	PIN, SHORTING
COP6 *n	1-564-948-21	o	PIN, SHORTING
COP7 *n	1-564-948-21	o	PIN, SHORTING
COP8 *n	1-564-948-21	o	PIN, SHORTING
COP9 *n	1-564-948-21	o	PIN, SHORTING
COP10 *n	1-564-948-21	o	PIN, SHORTING
COP11 *n	1-564-948-21	o	PIN, SHORTING
COP12 *n	1-564-948-21	o	PIN, SHORTING
COR1	1-562-579-21	s	PLUG, SHORTING
COR2	1-562-579-21	s	PLUG, SHORTING
COR3	1-562-579-21	s	PLUG, SHORTING
COR4 *n	1-562-579-21	s	PLUG, SHORTING
COR5 *n	1-562-579-21	s	PLUG, SHORTING
COR6 *n	1-562-579-21	s	PLUG, SHORTING
COR7 *n	1-562-579-21	s	PLUG, SHORTING
COR8 *n	1-562-579-21	s	PLUG, SHORTING
COR9 *n	1-562-579-21	s	PLUG, SHORTING
COR10 *n	1-562-579-21	s	PLUG, SHORTING
COR11 *n	1-562-579-21	s	PLUG, SHORTING
D1	8-719-987-09	s	DIODE PG1102W
D2	8-719-987-09	s	DIODE PG1102W
D3	8-719-987-09	s	DIODE PG1102W
D4	8-719-987-09	s	DIODE PG1102W
D5	8-719-975-84	s	DIODE AY1101W-88
D6	8-719-975-84	s	DIODE AY1101W-88
D7	8-719-975-84	s	DIODE AY1101W-88
D8	8-719-951-19	s	DIODE VR1101W-TR
D9	8-719-951-19	s	DIODE VR1101W-TR

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D10	8-719-987-09	s	DIODE PG1102W
D11	8-719-987-09	s	DIODE PG1102W
D12	8-719-951-19	s	DIODE VR1101W-TR
D13	8-719-951-19	s	DIODE VR1101W-TR
D14	8-719-987-09	s	DIODE PG1102W
D15	8-719-987-09	s	DIODE PG1102W
D16	8-719-951-19	s	DIODE VR1101W-TR
D17	8-719-987-09	s	DIODE PG1102W
F1 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F2 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F3 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F4 *d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F5 *o ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
F6 *o ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
FB3	1-543-256-11	s	BEAD, FERRITE
FB4	1-543-256-11	s	BEAD, FERRITE
FB5	1-543-256-11	s	BEAD, FERRITE
FB6	1-543-256-11	s	BEAD, FERRITE
IC1	8-759-527-52	s	IC SN74ABT541BPW-E05
IC2	8-759-527-53	s	IC SN74ABT245BPW-E05
IC3	8-759-527-53	s	IC SN74ABT245BPW-E05
IC4	8-759-527-53	s	IC SN74ABT245BPW-E05
IC5	8-759-386-23	s	IC 74LCX125SJX
IC6	8-759-527-52	s	IC SN74ABT541BPW-E05
IC7	8-759-527-53	s	IC SN74ABT245BPW-E05
IC8	8-759-527-53	s	IC SN74ABT245BPW-E05
IC9	8-759-386-27	s	IC 74LCX04MTCX
IC10	8-759-386-28	s	IC 74LCX00MTCX
IC11	8-759-649-24	s	IC SN74LVTH16835DGGR
IC12	8-759-547-74	s	IC SN74LVTH245APW-E05
IC13	8-759-527-52	s	IC SN74ABT541BPW-E05
IC14	8-759-527-52	s	IC SN74ABT541BPW-E05
IC15	8-759-528-60	s	IC CY7C133-55JC
IC16	8-759-527-48	s	IC SN74LVTH162244DGGR
IC17	8-759-528-51	s	IC IDT74FCT162245CTPA
IC18	8-759-528-51	s	IC IDT74FCT162245CTPA
IC19	8-759-528-41	s	IC IDT74FCT827CTSO-TL
IC20	8-759-528-41	s	IC IDT74FCT827CTSO-TL
IC21	8-759-528-52	s	IC IDT74FCT162260ETPA
IC22	8-759-528-52	s	IC IDT74FCT162260ETPA
IC23	8-759-649-24	s	IC SN74LVTH16835DGGR
IC24	8-759-547-74	s	IC SN74LVTH245APW-E05
IC25	8-759-528-51	s	IC IDT74FCT162245CTPA
IC26	8-759-528-51	s	IC IDT74FCT162245CTPA
IC27	8-759-527-53	s	IC SN74ABT245BPW-E05
IC28	8-759-527-53	s	IC SN74ABT245BPW-E05
IC29	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC30	8-759-527-48	s	IC SN74LVTH162244DGGR
IC31	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC32	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC33	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC34	8-759-528-52	s	IC IDT74FCT162260ETPA

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC35	8-759-527-48	s	IC SN74LVTH162244DGGR
IC36	8-759-547-74	s	IC SN74LVTH245APW-E05
IC37	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC38	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC39	8-759-528-69	s	IC AT28C64B-15TC
IC40	8-759-528-69	s	IC AT28C64B-15TC
IC41	8-759-528-69	s	IC AT28C64B-15TC
IC42	8-759-528-69	s	IC AT28C64B-15TC
IC43	8-759-649-24	s	IC SN74LVTH16835DGGR
IC44	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC45	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
*d IC46	8-759-578-81	o	IC AM27C4096-BOOT-H-V1
*d IC47	8-759-578-82	o	IC AM27C4096-BOOT-L-V1
IC48	8-759-649-24	s	IC SN74LVTH16835DGGR
IC49	8-759-649-24	s	IC SN74LVTH16835DGGR
IC50	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC51	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC52	8-759-831-67	s	IC PI74FCT162501ETA
IC53	8-759-831-67	s	IC PI74FCT162501ETA
IC54	8-759-527-50	s	IC SN74LVT16835DGGR
IC55	8-759-527-48	s	IC SN74LVTH162244DGGR
IC56	8-759-547-74	s	IC SN74LVTH245APW-E05
IC57	8-759-542-60	s	IC EPM7032-BYTE
IC58	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC59	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC60	8-759-527-48	s	IC SN74LVTH162244DGGR
IC61	8-759-527-48	s	IC SN74LVTH162244DGGR
IC62	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC63	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC64	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC65	8-759-495-92	s	IC SN74LVTH16245ADGGR
IC66	8-759-527-49	s	IC SN74LVT16952DGGR
IC67	8-759-528-70	s	IC AV9154A-27CS16
*h IC68	8-759-714-42	o	IC EPM7192-ALLMAIN-A
*g	8-759-665-07	o	IC EPM7192-ALLMAIN-V4
IC69	8-759-527-48	s	IC SN74LVTH162244DGGR
IC70	8-759-527-49	s	IC SN74LVT16952DGGR
*f IC71	8-759-638-15	s	IC IDT79RV4700-150GH
*e	8-759-528-38	s	IC IDT79RV4700-150G
IC72	8-759-649-25	s	IC SN74LVTH16501DGGR
IC73	8-759-649-25	s	IC SN74LVTH16501DGGR
IC74	8-759-180-50	s	IC MB89371AH-PF
IC75	8-759-649-25	s	IC SN74LVTH16501DGGR
IC76	8-759-649-25	s	IC SN74LVTH16501DGGR
IC77	8-759-650-52	o	IC EPM9320-ALLIO-V3
IC78	8-759-649-25	s	IC SN74LVTH16501DGGR
IC79	8-759-649-25	s	IC SN74LVTH16501DGGR
IC80	8-759-386-27	s	IC 74LCX04MTCX
IC81	8-759-389-30	s	IC 74LCX32MTCX
IC82	8-759-386-27	s	IC 74LCX04MTCX
IC83	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC84	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC85	8-759-649-25	s	IC SN74LVTH16501DGGR
IC86	8-759-649-25	s	IC SN74LVTH16501DGGR
IC87	8-759-831-65	s	IC PI74FCT162841ETA
IC88	8-759-284-84	s	IC DP83932CVF-33
IC89	8-759-472-94	s	IC MAX3241CAI-TE2
IC90	8-759-831-65	s	IC PI74FCT162841ETA
IC92	8-759-589-63	s	IC MT58LC128K18B4LG-9TR

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC93	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC94	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC95	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC96	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC97	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC98	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC99	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC100	8-759-527-43	s	IC MAX708SCSA
IC101	8-759-527-42	s	IC MAX708CSA
IC200	8-759-386-27	s	IC 74LCX04MTCX
*o IS46	1-251-047-21	s	SOCKET, IC 44P
*n	1-251-047-11	s	SOCKET, IC 44P
*o IS47	1-251-047-21	s	SOCKET, IC 44P
*n	1-251-047-11	s	SOCKET, IC 44P
*o IS57	1-251-047-21	s	SOCKET, IC 44P
*n	1-251-047-11	s	SOCKET, IC 44P
*n L1	1-421-370-00	s	COIL, CHOKE
*i L2	1-421-370-00	s	COIL, CHOKE
*i L3	1-421-370-00	s	COIL, CHOKE
R1	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R2	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R3	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R4	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R13	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R14	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R15	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R16	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R25	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R26	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R27	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R28	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R29	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R30	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
*n R31	1-216-295-91	s	RES, CHIP 0
R32	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R33	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R34	1-216-295-91	s	RES, CHIP 0
R35	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R36	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R37	1-216-295-91	s	RES, CHIP 0
R38	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R39	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R40	1-216-295-91	s	RES, CHIP 0
R42	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R43	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R44	1-216-295-91	s	RES, CHIP 0
R45	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R46	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R47	1-216-295-91	s	RES, CHIP 0
R48	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R49	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R50	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R51	1-216-295-91	s	RES, CHIP 0
R52	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*n R53	1-216-295-91	s	RES, CHIP 0
R54	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R55	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
*f R56	1-216-611-11	s	RESISTOR, CHIP 22 1/10W(2012)
*e	1-216-158-00	s	METAL, CHIP 22 5% 1/8W

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R57	1-216-615-11	s	METAL, CHIP 33 0.5% 1/10W
R58	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R59	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R60	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R61	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R62	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R69	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R70	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R74	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R76	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R77	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R78	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R79	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R82	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R83	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R84	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R85	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R88	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R89	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R90	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R91	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R92	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R93	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R94	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R95	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R96	1-216-295-91	*n s	RES, CHIP 0
R97	1-216-295-91	*n s	RES, CHIP 0
R98	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R99	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R100	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R101	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R107	1-216-295-91	*n s	RES, CHIP 0
R108	1-216-295-91	*n s	RES, CHIP 0
R127	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R128	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R129	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R131	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R132	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R135	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R138	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R139	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R140	1-216-295-91	*n s	RES, CHIP 0
R141	1-216-295-91	*n s	RES, CHIP 0
R142	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R143	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R146	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R147	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R148	1-216-295-91	*n s	RES, CHIP 0
R149	1-216-295-91	*n s	RES, CHIP 0
R150	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R151	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R152	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R153	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R154	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R155	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R156	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R157	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R158	1-216-675-11	*o s	METAL, CHIP 10k 0.5% 1/10W
	1-216-675-11	*g s	METAL, CHIP 10k 0.5% 1/10W

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R159	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R160	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R161	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R162	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R163	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R164	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R165	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R166	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R167	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R168	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R169	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R170	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R171	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R172	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R173	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R174	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R175	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R176	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R177	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R178	1-216-308-00	s	METAL, CHIP 4.7 5% 1/10W
R179	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R180	1-216-308-00	s	METAL, CHIP 4.7 5% 1/10W
R181	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R182	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R183	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R184	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R185	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R186	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R187	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R188	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R189	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R190	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R191	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R192	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R193	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R194	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R195	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R196	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R197	1-218-776-11	s	METAL 1M 0.5% 1/10W
R198	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R205	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R207	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R208	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R209	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R212	1-216-637-11	s	METAL, CHIP 270 0.5% 1/10W
R213	1-218-758-11	s	METAL 180k 0.5% 1/10W
R214	1-218-758-11	s	METAL 180k 0.5% 1/10W
R215	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R216	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R217	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R218	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R219	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R223	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R224	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R225	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R226	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R227	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R228	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R230	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R231	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R232	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R236	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R237	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R238	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R239	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R240	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R241	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R242	1-216-617-11	s	METAL, CHIP 39 0.50% 1/10W
R243	1-216-617-11	s	METAL, CHIP 39 0.50% 1/10W
R244	1-216-637-11	s	METAL, CHIP 270 0.5% 1/10W
R245	1-216-637-11	s	METAL, CHIP 270 0.5% 1/10W
R246	1-216-617-11	s	METAL, CHIP 39 0.50% 1/10W
R247	1-216-617-11	s	METAL, CHIP 39 0.50% 1/10W
R248	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R249	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R250	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R251	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R256	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R257	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R258	1-216-649-11	s	METAL, CHIP 820 0.5% 1/10W
R259	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R260	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R261	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R262	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R263	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R264	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R265	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R266	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R267	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R268	1-216-657-11	s	METAL, CHIP 1.8k 0.5% 1/10W
R300	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R301	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R302	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R303	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R304	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R305	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R306 *f	1-216-643-11	s	RESISTOR, CHIP 470 1/10W(2012)
*a	1-216-675-11	s	RESISTOR, CHIP 10K 1/10W(2012)
R307	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R308	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R309	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R310	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R312	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R350	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R351	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R352	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R353	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R354	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R355 *p	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
*j	1-216-643-11	s	METAL 470 0.5% 1/10W
R356 *p	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R357 *p	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R360	1-216-627-11	s	RESISTOR, CHIP 100 1/10W(2012)
R361	1-216-627-11	s	RESISTOR, CHIP 100 1/10W(2012)
R362 *n	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R363 *n	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W
R364 *n	1-215-445-00	s	RESISTOR, METAL FILM 10K 1/4W
R401 *o	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W

(CPU-183 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R402 *o	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R403 *o	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R404 *o	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R405 *o	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R406 *o	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R407 *q	1-216-295-91	s	CONDUCTOR, CHIP(2012)
S1	1-692-535-11	s	SWITCH, DIP 4-CKT
S2	1-553-856-00	s	SWITCH, TACTILE
T1	1-431-823-11	s	TRANSFORMER, PULSE
X1	1-579-994-12	s	CRYSTAL 14.31818000MHz
X2	1-760-464-11	s	CRYSTAL 4.91520000MHz
X3	1-767-279-21	s	CRYSTAL 20.00000000MHz

CRK-9 BOARD(HKDS-7031)

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	3-194-878-01	s	LEVER, PC BOARD
14pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
2pcs	7-626-320-11	s	PIN, SPRING 3x8
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-038-00	s	CERAMIC 0.1uF 25V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-038-00	s	CERAMIC 0.1uF 25V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7	1-163-038-00	s	CERAMIC 0.1uF 25V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-128-401-11	s	ELECT 100uF 20% 25V
C25	1-128-401-11	s	ELECT 100uF 20% 25V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-163-038-00	s	CERAMIC 0.1uF 25V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-038-00	s	CERAMIC 0.1uF 25V
C53	1-163-038-00	s	CERAMIC 0.1uF 25V
C54	1-163-038-00	s	CERAMIC 0.1uF 25V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C75	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C80	1-163-038-00	s	CERAMIC 0.1uF 25V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-038-00	s	CERAMIC 0.1uF 25V
C85	1-163-038-00	s	CERAMIC 0.1uF 25V
C86	1-163-038-00	s	CERAMIC 0.1uF 25V
C87	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C88	1-163-038-00	s	CERAMIC 0.1uF 25V
C89	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-126-396-11	s	ELECT, CHIP 47uF 20% 16V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-163-038-00	s	CERAMIC 0.1uF 25V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-038-00	s	CERAMIC 0.1uF 25V
C105	1-163-038-00	s	CERAMIC 0.1uF 25V
C106	1-163-038-00	s	CERAMIC 0.1uF 25V
C107	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C108	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-038-00	s	CERAMIC 0.1uF 25V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C117	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C118	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C119	1-163-038-00	s	CERAMIC 0.1uF 25V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-038-00	s	CERAMIC 0.1uF 25V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-038-00	s	CERAMIC 0.1uF 25V
C133	1-163-038-00	s	CERAMIC 0.1uF 25V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-038-00	s	CERAMIC 0.1uF 25V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C138	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-038-00	s	CERAMIC 0.1uF 25V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-038-00	s	CERAMIC 0.1uF 25V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-038-00	s	CERAMIC 0.1uF 25V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C502	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C503	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C504	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C505	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C506	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C507	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C508	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C509	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C510	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C511	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C512	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C513	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C514	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C515	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C516	1-163-038-00	s	CERAMIC 0.1uF 25V
C517	1-163-038-00	s	CERAMIC 0.1uF 25V
C518	1-163-038-00	s	CERAMIC 0.1uF 25V
C519	1-163-038-00	s	CERAMIC 0.1uF 25V
C520	1-163-038-00	s	CERAMIC 0.1uF 25V
C521	1-163-038-00	s	CERAMIC 0.1uF 25V
C522	1-163-038-00	s	CERAMIC 0.1uF 25V
C523	1-163-038-00	s	CERAMIC 0.1uF 25V
C524	1-163-038-00	s	CERAMIC 0.1uF 25V
C525	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C526	1-163-038-00	s	CERAMIC 0.1uF 25V
C527	1-163-038-00	s	CERAMIC 0.1uF 25V
C528	1-163-038-00	s	CERAMIC 0.1uF 25V
C529	1-163-038-00	s	CERAMIC 0.1uF 25V
C530	1-163-038-00	s	CERAMIC 0.1uF 25V
C531	1-163-038-00	s	CERAMIC 0.1uF 25V
C532	1-163-038-00	s	CERAMIC 0.1uF 25V
C533	1-163-038-00	s	CERAMIC 0.1uF 25V
C534	1-163-038-00	s	CERAMIC 0.1uF 25V
C535	1-163-038-00	s	CERAMIC 0.1uF 25V
C536	1-163-038-00	s	CERAMIC 0.1uF 25V
C537	1-163-038-00	s	CERAMIC 0.1uF 25V
C538	1-163-038-00	s	CERAMIC 0.1uF 25V
C539	1-163-038-00	s	CERAMIC 0.1uF 25V
C540	1-163-038-00	s	CERAMIC 0.1uF 25V
C541	1-163-038-00	s	CERAMIC 0.1uF 25V
C542	1-163-038-00	s	CERAMIC 0.1uF 25V
C543	1-163-038-00	s	CERAMIC 0.1uF 25V
C544	1-163-038-00	s	CERAMIC 0.1uF 25V
C545	1-163-038-00	s	CERAMIC 0.1uF 25V
C546	1-163-038-00	s	CERAMIC 0.1uF 25V
C547	1-163-038-00	s	CERAMIC 0.1uF 25V
C548	1-163-038-00	s	CERAMIC 0.1uF 25V
C549	1-163-038-00	s	CERAMIC 0.1uF 25V
C550	1-163-038-00	s	CERAMIC 0.1uF 25V
C551	1-163-038-00	s	CERAMIC 0.1uF 25V
C552	1-163-038-00	s	CERAMIC 0.1uF 25V
C553	1-163-038-00	s	CERAMIC 0.1uF 25V
C554	1-163-038-00	s	CERAMIC 0.1uF 25V
C555	1-163-038-00	s	CERAMIC 0.1uF 25V
C556	1-163-038-00	s	CERAMIC 0.1uF 25V
C557	1-163-038-00	s	CERAMIC 0.1uF 25V
C558	1-163-038-00	s	CERAMIC 0.1uF 25V
C559	1-163-038-00	s	CERAMIC 0.1uF 25V
C560	1-163-038-00	s	CERAMIC 0.1uF 25V
C561	1-163-038-00	s	CERAMIC 0.1uF 25V
C562	1-163-038-00	s	CERAMIC 0.1uF 25V
C563	1-163-038-00	s	CERAMIC 0.1uF 25V
C564	1-163-038-00	s	CERAMIC 0.1uF 25V
C565	1-163-038-00	s	CERAMIC 0.1uF 25V
C566	1-163-038-00	s	CERAMIC 0.1uF 25V
C567	1-163-038-00	s	CERAMIC 0.1uF 25V
C568	1-163-038-00	s	CERAMIC 0.1uF 25V
C569	1-163-038-00	s	CERAMIC 0.1uF 25V
C570	1-163-038-00	s	CERAMIC 0.1uF 25V
C571	1-163-038-00	s	CERAMIC 0.1uF 25V
C572	1-163-038-00	s	CERAMIC 0.1uF 25V
C573	1-163-038-00	s	CERAMIC 0.1uF 25V
C574	1-163-038-00	s	CERAMIC 0.1uF 25V
C575	1-163-038-00	s	CERAMIC 0.1uF 25V
C576	1-163-038-00	s	CERAMIC 0.1uF 25V
C578	1-163-038-00	s	CERAMIC 0.1uF 25V
C579	1-163-038-00	s	CERAMIC 0.1uF 25V
C580	1-163-038-00	s	CERAMIC 0.1uF 25V
C581	1-163-038-00	s	CERAMIC 0.1uF 25V
C582	1-163-038-00	s	CERAMIC 0.1uF 25V
C583	1-163-038-00	s	CERAMIC 0.1uF 25V
C584	1-163-038-00	s	CERAMIC 0.1uF 25V
C585	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C588	1-163-038-00	s	CERAMIC 0.1uF 25V
C589	1-163-038-00	s	CERAMIC 0.1uF 25V
C590	1-163-038-00	s	CERAMIC 0.1uF 25V
C591	1-163-038-00	s	CERAMIC 0.1uF 25V
C592	1-163-038-00	s	CERAMIC 0.1uF 25V
C593	1-163-038-00	s	CERAMIC 0.1uF 25V
C594	1-163-038-00	s	CERAMIC 0.1uF 25V
C595	1-163-038-00	s	CERAMIC 0.1uF 25V
C596	1-163-038-00	s	CERAMIC 0.1uF 25V
C597	1-163-038-00	s	CERAMIC 0.1uF 25V
C598	1-163-038-00	s	CERAMIC 0.1uF 25V
C599	1-163-038-00	s	CERAMIC 0.1uF 25V
C600	1-163-038-00	s	CERAMIC 0.1uF 25V
C601	1-163-038-00	s	CERAMIC 0.1uF 25V
C602	1-163-038-00	s	CERAMIC 0.1uF 25V
C603	1-163-038-00	s	CERAMIC 0.1uF 25V
C604	1-163-038-00	s	CERAMIC 0.1uF 25V
C605	1-163-038-00	s	CERAMIC 0.1uF 25V
C606	1-163-038-00	s	CERAMIC 0.1uF 25V
C607	1-163-038-00	s	CERAMIC 0.1uF 25V
C608	1-163-038-00	s	CERAMIC 0.1uF 25V
C609	1-163-038-00	s	CERAMIC 0.1uF 25V
C610	1-163-038-00	s	CERAMIC 0.1uF 25V
C611	1-163-038-00	s	CERAMIC 0.1uF 25V
C612	1-163-038-00	s	CERAMIC 0.1uF 25V
C613	1-163-038-00	s	CERAMIC 0.1uF 25V
C614	1-163-038-00	s	CERAMIC 0.1uF 25V
C615	1-163-038-00	s	CERAMIC 0.1uF 25V
C616	1-163-038-00	s	CERAMIC 0.1uF 25V
C617	1-163-038-00	s	CERAMIC 0.1uF 25V
C618	1-163-038-00	s	CERAMIC 0.1uF 25V
C619	1-163-038-00	s	CERAMIC 0.1uF 25V
C620	1-163-038-00	s	CERAMIC 0.1uF 25V
C621	1-163-038-00	s	CERAMIC 0.1uF 25V
C622	1-163-038-00	s	CERAMIC 0.1uF 25V
C623	1-163-038-00	s	CERAMIC 0.1uF 25V
C624	1-163-038-00	s	CERAMIC 0.1uF 25V
C625	1-163-038-00	s	CERAMIC 0.1uF 25V
C626	1-163-038-00	s	CERAMIC 0.1uF 25V
C627	1-163-038-00	s	CERAMIC 0.1uF 25V
C628	1-163-038-00	s	CERAMIC 0.1uF 25V
C629	1-163-038-00	s	CERAMIC 0.1uF 25V
C630	1-163-038-00	s	CERAMIC 0.1uF 25V
C631	1-163-038-00	s	CERAMIC 0.1uF 25V
C632	1-163-038-00	s	CERAMIC 0.1uF 25V
C633	1-163-038-00	s	CERAMIC 0.1uF 25V
C634	1-163-038-00	s	CERAMIC 0.1uF 25V
C635	1-163-038-00	s	CERAMIC 0.1uF 25V
C636	1-163-038-00	s	CERAMIC 0.1uF 25V
C637	1-163-038-00	s	CERAMIC 0.1uF 25V
C638	1-163-038-00	s	CERAMIC 0.1uF 25V
C639	1-163-038-00	s	CERAMIC 0.1uF 25V
C640	1-163-038-00	s	CERAMIC 0.1uF 25V
C641	1-163-038-00	s	CERAMIC 0.1uF 25V
C642	1-163-038-00	s	CERAMIC 0.1uF 25V
C643	1-163-038-00	s	CERAMIC 0.1uF 25V
C644	1-163-038-00	s	CERAMIC 0.1uF 25V
C645	1-163-038-00	s	CERAMIC 0.1uF 25V
C646	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C647	1-163-038-00	s	CERAMIC 0.1uF 25V
C648	1-163-038-00	s	CERAMIC 0.1uF 25V
C649	1-163-038-00	s	CERAMIC 0.1uF 25V
C650	1-163-038-00	s	CERAMIC 0.1uF 25V
C651	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C652	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C653	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C654	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C655	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C659	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C660	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C661	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C663	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C664	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C665	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C666	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C667	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C668	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C669	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C670	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C671	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C672	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C673	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C674	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C675	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C676	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C677	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C678	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C679	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C680	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C681	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C682	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C683	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C684	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C685	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C686	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C687	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C688	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C689	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C690	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C691	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C692	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C693	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C694	1-163-038-00	s	CERAMIC 0.1uF 25V
C695	1-163-038-00	s	CERAMIC 0.1uF 25V
C696	1-163-038-00	s	CERAMIC 0.1uF 25V
C697	1-163-038-00	s	CERAMIC 0.1uF 25V
C698	1-163-038-00	s	CERAMIC 0.1uF 25V
C699	1-163-038-00	s	CERAMIC 0.1uF 25V
C700	1-163-038-00	s	CERAMIC 0.1uF 25V
C701	1-163-038-00	s	CERAMIC 0.1uF 25V
C702	1-163-038-00	s	CERAMIC 0.1uF 25V
C703	1-163-038-00	s	CERAMIC 0.1uF 25V
C704	1-163-038-00	s	CERAMIC 0.1uF 25V
C705	1-163-038-00	s	CERAMIC 0.1uF 25V
C706	1-163-038-00	s	CERAMIC 0.1uF 25V
C707	1-163-038-00	s	CERAMIC 0.1uF 25V
C718	1-163-038-00	s	CERAMIC 0.1uF 25V
C750	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C751	1-163-038-00	s	CERAMIC 0.1uF 25V
C752	1-163-038-00	s	CERAMIC 0.1uF 25V
C753	1-163-038-00	s	CERAMIC 0.1uF 25V
C754	1-163-038-00	s	CERAMIC 0.1uF 25V
C755	1-163-038-00	s	CERAMIC 0.1uF 25V
C756	1-163-038-00	s	CERAMIC 0.1uF 25V
C757	1-163-038-00	s	CERAMIC 0.1uF 25V
C758	1-163-038-00	s	CERAMIC 0.1uF 25V
C759	1-163-038-00	s	CERAMIC 0.1uF 25V
C760	1-163-038-00	s	CERAMIC 0.1uF 25V
C761	1-163-038-00	s	CERAMIC 0.1uF 25V
C762	1-163-038-00	s	CERAMIC 0.1uF 25V
C763	1-163-038-00	s	CERAMIC 0.1uF 25V
C764	1-163-038-00	s	CERAMIC 0.1uF 25V
C765	1-163-038-00	s	CERAMIC 0.1uF 25V
C766	1-163-038-00	s	CERAMIC 0.1uF 25V
C767	1-163-038-00	s	CERAMIC 0.1uF 25V
C768	1-163-038-00	s	CERAMIC 0.1uF 25V
C769	1-163-038-00	s	CERAMIC 0.1uF 25V
C770	1-163-038-00	s	CERAMIC 0.1uF 25V
C771	1-163-038-00	s	CERAMIC 0.1uF 25V
C772	1-163-038-00	s	CERAMIC 0.1uF 25V
C773	1-163-038-00	s	CERAMIC 0.1uF 25V
C774	1-163-038-00	s	CERAMIC 0.1uF 25V
C775	1-163-038-00	s	CERAMIC 0.1uF 25V
C776	1-163-038-00	s	CERAMIC 0.1uF 25V
C777	1-163-038-00	s	CERAMIC 0.1uF 25V
C778	1-163-038-00	s	CERAMIC 0.1uF 25V
C779	1-163-038-00	s	CERAMIC 0.1uF 25V
C780	1-163-038-00	s	CERAMIC 0.1uF 25V
C781	1-163-038-00	s	CERAMIC 0.1uF 25V
C782	1-163-038-00	s	CERAMIC 0.1uF 25V
C783	1-163-038-00	s	CERAMIC 0.1uF 25V
C784	1-163-038-00	s	CERAMIC 0.1uF 25V
C785	1-163-038-00	s	CERAMIC 0.1uF 25V
C786	1-163-038-00	s	CERAMIC 0.1uF 25V
C787	1-163-038-00	s	CERAMIC 0.1uF 25V
C788	1-163-038-00	s	CERAMIC 0.1uF 25V
C789	1-163-038-00	s	CERAMIC 0.1uF 25V
C790	1-163-038-00	s	CERAMIC 0.1uF 25V
C791	1-163-038-00	s	CERAMIC 0.1uF 25V
C843	1-163-038-00	s	CERAMIC 0.1uF 25V
C844	1-163-038-00	s	CERAMIC 0.1uF 25V
C845	1-163-038-00	s	CERAMIC 0.1uF 25V
C846	1-163-038-00	s	CERAMIC 0.1uF 25V
C847	1-163-038-00	s	CERAMIC 0.1uF 25V
C848	1-163-038-00	s	CERAMIC 0.1uF 25V
C849	1-163-038-00	s	CERAMIC 0.1uF 25V
C850	1-163-038-00	s	CERAMIC 0.1uF 25V
C851	1-163-038-00	s	CERAMIC 0.1uF 25V
C852	1-163-038-00	s	CERAMIC 0.1uF 25V
C853	1-163-038-00	s	CERAMIC 0.1uF 25V
C854	1-163-038-00	s	CERAMIC 0.1uF 25V
C855	1-163-038-00	s	CERAMIC 0.1uF 25V
C856	1-163-038-00	s	CERAMIC 0.1uF 25V
C857	1-163-038-00	s	CERAMIC 0.1uF 25V
C858	1-163-038-00	s	CERAMIC 0.1uF 25V
C859	1-163-038-00	s	CERAMIC 0.1uF 25V
C860	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C861	1-163-038-00	s	CERAMIC 0.1uF 25V
C862	1-163-038-00	s	CERAMIC 0.1uF 25V
C863	1-163-038-00	s	CERAMIC 0.1uF 25V
C864	1-163-038-00	s	CERAMIC 0.1uF 25V
C865	1-163-038-00	s	CERAMIC 0.1uF 25V
C866	1-163-038-00	s	CERAMIC 0.1uF 25V
C867	1-163-038-00	s	CERAMIC 0.1uF 25V
C868	1-163-038-00	s	CERAMIC 0.1uF 25V
C869	1-163-038-00	s	CERAMIC 0.1uF 25V
C870	1-163-038-00	s	CERAMIC 0.1uF 25V
C871	1-163-038-00	s	CERAMIC 0.1uF 25V
C872	1-163-038-00	s	CERAMIC 0.1uF 25V
C873	1-163-038-00	s	CERAMIC 0.1uF 25V
C874	1-163-038-00	s	CERAMIC 0.1uF 25V
C875	1-163-038-00	s	CERAMIC 0.1uF 25V
C876	1-163-038-00	s	CERAMIC 0.1uF 25V
C877	1-163-038-00	s	CERAMIC 0.1uF 25V
C878	1-163-038-00	s	CERAMIC 0.1uF 25V
C879	1-163-038-00	s	CERAMIC 0.1uF 25V
C880	1-163-038-00	s	CERAMIC 0.1uF 25V
C881	1-163-038-00	s	CERAMIC 0.1uF 25V
C882	1-163-038-00	s	CERAMIC 0.1uF 25V
C883	1-163-038-00	s	CERAMIC 0.1uF 25V
C884	1-163-038-00	s	CERAMIC 0.1uF 25V
C885	1-163-038-00	s	CERAMIC 0.1uF 25V
C886	1-163-038-00	s	CERAMIC 0.1uF 25V
C887	1-163-038-00	s	CERAMIC 0.1uF 25V
C888	1-163-038-00	s	CERAMIC 0.1uF 25V
C889	1-163-038-00	s	CERAMIC 0.1uF 25V
C890	1-163-038-00	s	CERAMIC 0.1uF 25V
C891	1-163-038-00	s	CERAMIC 0.1uF 25V
C892	1-163-038-00	s	CERAMIC 0.1uF 25V
C893	1-163-038-00	s	CERAMIC 0.1uF 25V
C894	1-163-038-00	s	CERAMIC 0.1uF 25V
C895	1-163-038-00	s	CERAMIC 0.1uF 25V
C896	1-163-038-00	s	CERAMIC 0.1uF 25V
C897	1-163-038-00	s	CERAMIC 0.1uF 25V
C898	1-163-038-00	s	CERAMIC 0.1uF 25V
C899	1-163-038-00	s	CERAMIC 0.1uF 25V
C900	1-163-038-00	s	CERAMIC 0.1uF 25V
C901	1-163-038-00	s	CERAMIC 0.1uF 25V
C902	1-163-038-00	s	CERAMIC 0.1uF 25V
C903	1-163-038-00	s	CERAMIC 0.1uF 25V
C904	1-163-038-00	s	CERAMIC 0.1uF 25V
C905	1-163-038-00	s	CERAMIC 0.1uF 25V
C906	1-163-038-00	s	CERAMIC 0.1uF 25V
C907	1-163-038-00	s	CERAMIC 0.1uF 25V
C908	1-163-038-00	s	CERAMIC 0.1uF 25V
C909	1-163-038-00	s	CERAMIC 0.1uF 25V
C910	1-163-038-00	s	CERAMIC 0.1uF 25V
C911	1-163-038-00	s	CERAMIC 0.1uF 25V
C912	1-163-038-00	s	CERAMIC 0.1uF 25V
C913	1-163-038-00	s	CERAMIC 0.1uF 25V
C914	1-163-038-00	s	CERAMIC 0.1uF 25V
C915	1-163-038-00	s	CERAMIC 0.1uF 25V
C916	1-163-038-00	s	CERAMIC 0.1uF 25V
C917	1-163-038-00	s	CERAMIC 0.1uF 25V
C918	1-163-038-00	s	CERAMIC 0.1uF 25V
C919	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C920	1-163-038-00	s	CERAMIC 0.1uF 25V
C921	1-163-038-00	s	CERAMIC 0.1uF 25V
C922	1-163-038-00	s	CERAMIC 0.1uF 25V
C923	1-163-038-00	s	CERAMIC 0.1uF 25V
C924	1-163-038-00	s	CERAMIC 0.1uF 25V
C925	1-163-038-00	s	CERAMIC 0.1uF 25V
C926	1-163-038-00	s	CERAMIC 0.1uF 25V
C927	1-163-038-00	s	CERAMIC 0.1uF 25V
C928	1-163-038-00	s	CERAMIC 0.1uF 25V
C929	1-163-038-00	s	CERAMIC 0.1uF 25V
C930	1-163-038-00	s	CERAMIC 0.1uF 25V
C931	1-163-038-00	s	CERAMIC 0.1uF 25V
C932	1-163-038-00	s	CERAMIC 0.1uF 25V
C933	1-163-038-00	s	CERAMIC 0.1uF 25V
C934	1-163-038-00	s	CERAMIC 0.1uF 25V
C935	1-163-038-00	s	CERAMIC 0.1uF 25V
C936	1-163-038-00	s	CERAMIC 0.1uF 25V
C937	1-163-038-00	s	CERAMIC 0.1uF 25V
C938	1-163-038-00	s	CERAMIC 0.1uF 25V
C939	1-163-038-00	s	CERAMIC 0.1uF 25V
C940	1-163-038-00	s	CERAMIC 0.1uF 25V
C941	1-163-038-00	s	CERAMIC 0.1uF 25V
C942	1-163-038-00	s	CERAMIC 0.1uF 25V
C943	1-163-038-00	s	CERAMIC 0.1uF 25V
C944	1-163-038-00	s	CERAMIC 0.1uF 25V
C945	1-163-038-00	s	CERAMIC 0.1uF 25V
C946	1-163-038-00	s	CERAMIC 0.1uF 25V
C947	1-163-038-00	s	CERAMIC 0.1uF 25V
C948	1-163-038-00	s	CERAMIC 0.1uF 25V
C949	1-163-038-00	s	CERAMIC 0.1uF 25V
C950	1-163-038-00	s	CERAMIC 0.1uF 25V
C951	1-163-038-00	s	CERAMIC 0.1uF 25V
C952	1-163-038-00	s	CERAMIC 0.1uF 25V
C953	1-163-038-00	s	CERAMIC 0.1uF 25V
C954	1-163-038-00	s	CERAMIC 0.1uF 25V
C955	1-163-038-00	s	CERAMIC 0.1uF 25V
C956	1-163-038-00	s	CERAMIC 0.1uF 25V
C957	1-163-038-00	s	CERAMIC 0.1uF 25V
C958	1-163-038-00	s	CERAMIC 0.1uF 25V
C959	1-163-038-00	s	CERAMIC 0.1uF 25V
C960	1-163-038-00	s	CERAMIC 0.1uF 25V
C961	1-163-038-00	s	CERAMIC 0.1uF 25V
C962	1-163-038-00	s	CERAMIC 0.1uF 25V
C963	1-163-038-00	s	CERAMIC 0.1uF 25V
C964	1-163-038-00	s	CERAMIC 0.1uF 25V
C965	1-163-038-00	s	CERAMIC 0.1uF 25V
C966	1-163-038-00	s	CERAMIC 0.1uF 25V
C967	1-163-038-00	s	CERAMIC 0.1uF 25V
C968	1-163-038-00	s	CERAMIC 0.1uF 25V
C969	1-163-038-00	s	CERAMIC 0.1uF 25V
C970	1-163-038-00	s	CERAMIC 0.1uF 25V
C971	1-163-038-00	s	CERAMIC 0.1uF 25V
C972	1-163-038-00	s	CERAMIC 0.1uF 25V
C973	1-163-038-00	s	CERAMIC 0.1uF 25V
C974	1-163-038-00	s	CERAMIC 0.1uF 25V
C975	1-163-038-00	s	CERAMIC 0.1uF 25V
C976	1-163-038-00	s	CERAMIC 0.1uF 25V
C977	1-163-038-00	s	CERAMIC 0.1uF 25V
C978	1-163-038-00	s	CERAMIC 0.1uF 25V

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
C979	1-163-038-00	s	CERAMIC 0.1uF 25V
C980	1-163-038-00	s	CERAMIC 0.1uF 25V
C983	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C984	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C985	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C986	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C987	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C988	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
CN1	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
D2	8-719-975-84	s	DIODE AY1101W-88
D4	8-719-975-84	s	DIODE AY1101W-88
F1	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F2	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F3	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F4	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
IC1	8-759-271-78	s	IC DS26C32ATM
IC2	8-759-271-82	s	IC DS3695ATM
IC3	8-759-464-48	s	IC CXD8900J
IC4	8-759-464-48	s	IC CXD8900J
IC5	8-759-389-48	s	IC 74LCX16374MTDX
IC6	8-759-389-48	s	IC 74LCX16374MTDX
IC7	8-759-464-48	s	IC CXD8900J
IC8	8-759-464-48	s	IC CXD8900J
IC9	8-759-464-48	s	IC CXD8900J
IC10	8-759-464-48	s	IC CXD8900J
IC12	8-759-464-48	s	IC CXD8900J
IC13	8-759-466-63	s	IC CXD8895Q
IC14	8-759-464-48	s	IC CXD8900J
IC15	8-759-464-48	s	IC CXD8900J
IC18	8-759-389-48	s	IC 74LCX16374MTDX
IC19	8-759-389-48	s	IC 74LCX16374MTDX
IC22	8-759-469-98	s	IC CAT93C66K-LE10
IC23	8-759-530-15	s	IC TC74ACT245FT(EL)
IC25	8-759-439-42	s	IC CXD9022R
IC26	8-759-439-42	s	IC CXD9022R
IC27	8-759-466-62	s	IC CXD8894Q
IC28	8-759-464-48	s	IC CXD8900J
IC29	8-759-439-44	s	IC CXD9024Q
IC30	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC31	8-759-464-48	s	IC CXD8900J
IC32	8-759-505-00	s	IC CXD8052Q
IC33	8-759-505-00	s	IC CXD8052Q
IC34	8-759-386-28	s	IC 74LCX00MTCX
IC37	8-759-389-48	s	IC 74LCX16374MTDX
IC38	8-759-389-48	s	IC 74LCX16374MTDX
IC39	8-759-389-48	s	IC 74LCX16374MTDX
IC40	8-759-505-06	s	IC CXD8058Q
IC41	8-759-389-48	s	IC 74LCX16374MTDX
IC42	8-759-389-48	s	IC 74LCX16374MTDX
IC43	8-759-466-62	s	IC CXD8894Q
IC44	8-759-466-62	s	IC CXD8894Q
IC47	8-759-464-48	s	IC CXD8900J
IC48	8-759-464-48	s	IC CXD8900J
IC50	8-759-389-48	s	IC 74LCX16374MTDX

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
IC51	8-759-389-48	s	IC 74LCX16374MTDX
IC52	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC54	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC55	8-759-389-48	s	IC 74LCX16374MTDX
IC56	8-759-389-45	s	IC 74LCX16244MTDX
IC57	8-759-386-27	s	IC 74LCX04MTCX
IC58	8-759-572-83	s	IC CXD8898AQ
IC59	8-759-466-63	s	IC CXD8895Q
IC60	8-759-523-49	s	IC TC74ACT541FT(EL)
IC63	8-759-523-49	s	IC TC74ACT541FT(EL)
IC64	8-759-464-48	s	IC CXD8900J
IC65	8-759-466-59	s	IC CGS2535TVX
IC67	8-759-466-21	s	IC S4405B-80
IC68	8-759-389-48	s	IC 74LCX16374MTDX
IC69	8-759-389-48	s	IC 74LCX16374MTDX
IC75	8-759-465-49	s	IC MC10ELT21DR2
IC80	8-759-466-63	s	IC CXD8895Q
IC83	8-759-466-62	s	IC CXD8894Q
IC84	8-759-466-62	s	IC CXD8894Q
IC85	8-759-464-48	s	IC CXD8900J
IC86	8-759-464-48	s	IC CXD8900J
IC87	8-759-464-48	s	IC CXD8900J
IC88	8-759-466-59	s	IC CGS2535TVX
IC89	8-759-466-59	s	IC CGS2535TVX
IC90	8-759-389-48	s	IC 74LCX16374MTDX
IC91	8-759-572-83	s	IC CXD8898AQ
IC92	8-759-466-62	s	IC CXD8894Q
IC93	8-759-466-62	s	IC CXD8894Q
IC96	8-759-464-48	s	IC CXD8900J
IC97	8-759-464-48	s	IC CXD8900J
IC98	8-759-464-48	s	IC CXD8900J
IC99	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC100	8-759-389-48	s	IC 74LCX16374MTDX
IC101	8-759-389-48	s	IC 74LCX16374MTDX
IC102	8-759-389-48	s	IC 74LCX16374MTDX
IC103	8-759-389-48	s	IC 74LCX16374MTDX
IC104	8-759-389-45	s	IC 74LCX16244MTDX
IC105	8-759-389-48	s	IC 74LCX16374MTDX
IC106	8-759-572-83	s	IC CXD8898AQ
IC107	8-759-572-83	s	IC CXD8898AQ
IC108	8-759-386-28	s	IC 74LCX00MTCX
IC109	8-759-386-27	s	IC 74LCX04MTCX
IC110	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC116	8-759-386-27	s	IC 74LCX04MTCX
IC117	8-759-389-30	s	IC 74LCX32MTCX
IC118	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC119	8-759-389-45	s	IC 74LCX16244MTDX
IC120	8-759-389-48	s	IC 74LCX16374MTDX
IC121	8-759-464-48	s	IC CXD8900J
IC122	8-759-389-48	s	IC 74LCX16374MTDX
IC123	8-759-389-30	s	IC 74LCX32MTCX
IC124	8-759-466-62	s	IC CXD8894Q
IC125	8-759-439-44	s	IC CXD9024Q
IC126	8-759-464-46	s	IC CXD8899J
IC127	8-759-466-62	s	IC CXD8894Q
IC128	8-759-466-62	s	IC CXD8894Q
IC129	8-759-439-44	s	IC CXD9024Q
IC132	8-759-572-83	s	IC CXD8898AQ
IC133	8-759-572-83	s	IC CXD8898AQ

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
IC500	8-759-466-55	s	IC 74LCX74MTCX
IC501	8-759-466-55	s	IC 74LCX74MTCX
IC502	8-759-389-48	s	IC 74LCX16374MTDX
IC503	8-759-389-48	s	IC 74LCX16374MTDX
IC504	8-759-464-46	s	IC CXD8899J
IC505	8-759-464-46	s	IC CXD8899J
IC506	8-759-464-46	s	IC CXD8899J
IC507	8-759-464-46	s	IC CXD8899J
IC508	8-759-464-46	s	IC CXD8899J
IC509	8-759-464-46	s	IC CXD8899J
IC510	8-759-464-48	s	IC CXD8900J
IC511	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC512	8-759-464-48	s	IC CXD8900J
IC513	8-759-464-48	s	IC CXD8900J
IC514	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC515	8-759-389-26	s	IC 74LCX08MTCX
IC516	8-759-464-48	s	IC CXD8900J
IC517	8-759-464-48	s	IC CXD8900J
IC518	8-759-466-62	s	IC CXD8894Q
IC519	8-759-466-62	s	IC CXD8894Q
IC520	8-759-464-48	s	IC CXD8900J
IC521	8-759-464-48	s	IC CXD8900J
IC522	8-759-389-48	s	IC 74LCX16374MTDX
IC524	8-759-466-63	s	IC CXD8895Q
IC527	8-759-464-48	s	IC CXD8900J
IC528	8-759-464-48	s	IC CXD8900J
IC529	8-759-464-48	s	IC CXD8900J
IC530	8-759-439-44	s	IC CXD9024Q
IC531	8-759-439-44	s	IC CXD9024Q
IC532	8-759-523-49	s	IC TC74ACT541FT(EL)
IC533	8-759-523-49	s	IC TC74ACT541FT(EL)
IC534	8-759-523-49	s	IC TC74ACT541FT(EL)
IC535	8-759-523-49	s	IC TC74ACT541FT(EL)
IC536	8-759-523-49	s	IC TC74ACT541FT(EL)
IC537	8-759-523-49	s	IC TC74ACT541FT(EL)
IC538	8-759-456-26	s	IC 74LCX541MTCX
IC539	8-759-456-26	s	IC 74LCX541MTCX
IC540	8-759-456-26	s	IC 74LCX541MTCX
IC541	8-759-456-26	s	IC 74LCX541MTCX
IC542	8-759-456-26	s	IC 74LCX541MTCX
IC543	8-759-456-26	s	IC 74LCX541MTCX
IC544	8-759-456-26	s	IC 74LCX541MTCX
IC545	8-759-456-26	s	IC 74LCX541MTCX
IC546	8-759-456-26	s	IC 74LCX541MTCX
IC547	8-759-523-49	s	IC TC74ACT541FT(EL)
IC548	8-759-456-26	s	IC 74LCX541MTCX
IC549	8-759-456-26	s	IC 74LCX541MTCX
IC550	8-759-456-26	s	IC 74LCX541MTCX
IC551	8-759-464-48	s	IC CXD8900J
IC552	8-759-466-63	s	IC CXD8895Q
IC555	8-759-389-48	s	IC 74LCX16374MTDX
IC556	8-759-389-26	s	IC 74LCX08MTCX
IC557	8-759-466-56	s	IC 74LCX86MTCX
IC558	8-759-584-18	o	IC EPM7064-LIMIT-V1
IC562	8-759-572-83	s	IC CXD8898AQ
IC564	8-759-527-57	s	IC SN74ABT16823DGGR
IC565	8-759-466-63	s	IC CXD8895Q
IC566	8-759-572-83	s	IC CXD8898AQ
IC567	8-759-464-48	s	IC CXD8900J

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
IC568	8-759-464-48	s	IC CXD8900J
IC569	8-759-464-46	s	IC CXD8899J
IC570	8-759-464-48	s	IC CXD8900J
IC571	8-759-523-49	s	IC TC74ACT541FT(EL)
IC572	8-759-456-26	s	IC 74LCX541MTCX
IC573	8-759-466-63	s	IC CXD8895Q
IC574	8-759-389-48	s	IC 74LCX16374MTDX
IC575	8-759-389-48	s	IC 74LCX16374MTDX
IC576	8-759-466-59	s	IC CGS2535TVX
IC577	8-759-389-48	s	IC 74LCX16374MTDX
IC578	8-759-456-26	s	IC 74LCX541MTCX
IC579	8-759-456-26	s	IC 74LCX541MTCX
IS558	1-251-047-11	s	SOCKET, IC 44P
R33	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R37	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R39	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R41	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R42	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R43	1-216-295-91	s	RES, CHIP 0
R44	1-216-295-91	s	RES, CHIP 0
R45	1-216-295-91	s	RES, CHIP 0
R46	1-216-295-91	s	RES, CHIP 0
R47	1-216-295-91	s	RES, CHIP 0
R48	1-216-295-91	s	RES, CHIP 0
R53	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R54	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R65	1-216-603-11	s	METAL, CHIP 10 0.5% 1/10W
R69	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R70	1-216-603-11	s	METAL, CHIP 10 0.5% 1/10W
R76	1-216-603-11	s	METAL, CHIP 10 0.5% 1/10W
R83	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R91	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R96	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R97	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R113	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R117	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R122	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R126	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R130	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R131	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R132	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R141	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R142	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R143	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R144	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R145	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R146	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R147	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R148	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R149	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R150	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R151	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R505	1-216-295-91	s	RES, CHIP 0
R506	1-216-295-91	s	RES, CHIP 0
R512	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R514	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R516	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R518	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
R520	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R522	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R523	1-216-295-91	s	RES, CHIP 0
R524	1-216-295-91	s	RES, CHIP 0
R526	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R528	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R530	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R532	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R534	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R536	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R538	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R540	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R541	1-216-295-91	s	RES, CHIP 0
R542	1-216-295-91	s	RES, CHIP 0
R543	1-216-295-91	s	RES, CHIP 0
R544	1-216-295-91	s	RES, CHIP 0
R545	1-216-295-91	s	RES, CHIP 0
R547	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R549	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R551	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R553	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R555	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R563	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R565	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R567	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R571	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R573	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R575	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R577	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R579	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R581	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R583	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R585	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R587	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R589	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R591	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R593	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R595	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R597	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R599	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R601	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R603	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R605	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R607	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R609	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R611	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R613	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R615	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R617	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R619	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R621	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R623	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R625	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R627	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R629	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R631	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R632	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R633	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R634	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
R635	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R636	1-216-603-11	s	METAL, CHIP 10 0.5% 1/10W
R642	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R644	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R646	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R648	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R650	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R652	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R653	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R654	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R655	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R656	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R657	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R658	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R659	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R667	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R668	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R669	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB10	1-233-448-11	s	RES, CHIP NETWORK 22
RB11	1-233-448-11	s	RES, CHIP NETWORK 22
RB12	1-233-448-11	s	RES, CHIP NETWORK 22
RB13	1-233-448-11	s	RES, CHIP NETWORK 22
RB14	1-233-448-11	s	RES, CHIP NETWORK 22
RB15	1-233-448-11	s	RES, CHIP NETWORK 22
RB16	1-233-448-11	s	RES, CHIP NETWORK 22
RB17	1-233-448-11	s	RES, CHIP NETWORK 22
RB18	1-233-448-11	s	RES, CHIP NETWORK 22
RB19	1-233-448-11	s	RES, CHIP NETWORK 22
RB20	1-233-448-11	s	RES, CHIP NETWORK 22
RB21	1-233-448-11	s	RES, CHIP NETWORK 22
RB22	1-233-448-11	s	RES, CHIP NETWORK 22
RB23	1-233-448-11	s	RES, CHIP NETWORK 22
RB24	1-233-448-11	s	RES, CHIP NETWORK 22
RB25	1-233-448-11	s	RES, CHIP NETWORK 22
RB26	1-233-448-11	s	RES, CHIP NETWORK 22
RB27	1-233-448-11	s	RES, CHIP NETWORK 22
RB28	1-233-448-11	s	RES, CHIP NETWORK 22
RB29	1-233-448-11	s	RES, CHIP NETWORK 22
RB30	1-233-448-11	s	RES, CHIP NETWORK 22
RB31	1-233-448-11	s	RES, CHIP NETWORK 22
RB32	1-233-448-11	s	RES, CHIP NETWORK 22
RB33	1-233-448-11	s	RES, CHIP NETWORK 22
RB34	1-233-448-11	s	RES, CHIP NETWORK 22
RB35	1-233-448-11	s	RES, CHIP NETWORK 22
RB36	1-233-448-11	s	RES, CHIP NETWORK 22
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB39	1-233-448-11	s	RES, CHIP NETWORK 22
RB40	1-233-448-11	s	RES, CHIP NETWORK 22

(CRK-9 BOARD(HKDS-7031))

Ref. No. or Q'ty	Part No.	SP	Description
RB41	1-233-448-11	s	RES, CHIP NETWORK 22
RB42	1-233-448-11	s	RES, CHIP NETWORK 22
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22
RB45	1-233-448-11	s	RES, CHIP NETWORK 22
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB47	1-233-448-11	s	RES, CHIP NETWORK 22
RB48	1-234-078-11	s	RES, CHIP NETWORK 47
RB49	1-234-078-11	s	RES, CHIP NETWORK 47

DI-21 BOARD
---

*a:[Lot No. 710 - 805]
*b:[Lot No. 806 -]
*c:[Lot No. 0B4 -]
*d:[Lot No. 802 -]
*e:[Lot No. 802 - 906]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8322-472-A	o	MOUNTED CIRCUIT BOARD, DI-37 (DI-37 board is used as repair board of both DI-37 and DI-21 boards.)
1pc	1-783-425-11	o	CABLE ASSY, COAXIAL(I1)
1pc	1-783-426-11	o	CABLE ASSY, COAXIAL(I2)
1pc	1-783-427-11	o	CABLE ASSY, COAXIAL(I3)
1pc	1-783-428-11	o	CABLE ASSY, COAXIAL(I4)
1pc	1-783-429-11	o	CABLE ASSY, COAXIAL(I5)
1pc	1-783-430-11	o	CABLE ASSY, COAXIAL(I6)
1pc	1-783-431-11	o	CABLE ASSY, COAXIAL(I7)
1pc	1-783-432-11	o	CABLE ASSY, COAXIAL(I8)
1pc	1-783-433-11	o	CABLE ASSY, COAXIAL(I9)
1pc	1-783-434-11	o	CABLE ASSY, COAXIAL(I10)
1pc	1-783-435-11	o	CABLE ASSY, COAXIAL(I11)
1pc	1-783-436-11	o	CABLE ASSY, COAXIAL(I12)
1pc	1-783-437-11	o	CABLE ASSY, COAXIAL(I13)
1pc	1-783-438-11	o	CABLE ASSY, COAXIAL(I14)
1pc	1-783-439-11	o	CABLE ASSY, COAXIAL(I15)
45pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
2pcs	3-194-878-01	s	LEVER, PC BOARD
8pcs	3-683-631-01	o	CLAMP
14pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
2pcs	7-626-320-11	s	PIN, SPRING 3x8
45pcs	7-682-547-04	s	SCREW +B 3x6
C1	1-128-401-11	s	ELECT 100uF 20% 25V
C2	1-128-401-11	s	ELECT 100uF 20% 25V
C3	1-125-783-11	s	ELECT 820uF 20% 4V
C4	1-117-372-11	s	TANTALUM 100uF 20% 10V
C5	1-128-401-11	s	ELECT 100uF 20% 25V
C6	1-117-373-11	s	TANTALUM 150uF 20% 6.3V
C7	1-117-372-11	s	TANTALUM 100uF 20% 10V
C8	1-125-783-11	s	ELECT 820uF 20% 4V
C9	1-164-346-11	s	CERAMIC 1uF 16V
C10	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C11	1-125-783-11	s	ELECT 820uF 20% 4V
C12	1-164-346-11	s	CERAMIC 1uF 16V
C13	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C14	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C15	1-125-783-11	s	ELECT 820uF 20% 4V
C16	1-117-372-11	s	TANTALUM 100uF 20% 10V
C17	1-164-346-11	s	CERAMIC 1uF 16V
C18	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C19	1-164-346-11	s	CERAMIC 1uF 16V
C20	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C21	1-125-783-11	s	ELECT 820uF 20% 4V
C22	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C23	1-125-783-11	s	ELECT 820uF 20% 4V
C24	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C25	1-126-396-11	s	ELECT, CHIP 47uF 20% 16V
C27	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C28	1-163-021-91	s	CERAMIC 0.01uF 10% 50V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C35	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-038-00	s	CERAMIC 0.1uF 25V
C48	1-163-038-00	s	CERAMIC 0.1uF 25V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-038-00	s	CERAMIC 0.1uF 25V
C53	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C54	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C57	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C63	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C64	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C74	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C75	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C78	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C79	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C80	1-163-038-00	s	CERAMIC 0.1uF 25V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-038-00	s	CERAMIC 0.1uF 25V
C85	1-163-038-00	s	CERAMIC 0.1uF 25V
C86	1-163-038-00	s	CERAMIC 0.1uF 25V
C87	1-163-038-00	s	CERAMIC 0.1uF 25V
C88	1-163-038-00	s	CERAMIC 0.1uF 25V
C89	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-038-00	s	CERAMIC 0.1uF 25V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-163-038-00	s	CERAMIC 0.1uF 25V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-038-00	s	CERAMIC 0.1uF 25V
C105	1-163-038-00	s	CERAMIC 0.1uF 25V
C106	1-163-038-00	s	CERAMIC 0.1uF 25V
C107	1-163-038-00	s	CERAMIC 0.1uF 25V
C108	1-163-038-00	s	CERAMIC 0.1uF 25V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-038-00	s	CERAMIC 0.1uF 25V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-163-038-00	s	CERAMIC 0.1uF 25V
C119	1-163-038-00	s	CERAMIC 0.1uF 25V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-038-00	s	CERAMIC 0.1uF 25V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-038-00	s	CERAMIC 0.1uF 25V
C133	1-163-038-00	s	CERAMIC 0.1uF 25V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-038-00	s	CERAMIC 0.1uF 25V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C138	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-038-00	s	CERAMIC 0.1uF 25V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-038-00	s	CERAMIC 0.1uF 25V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-038-00	s	CERAMIC 0.1uF 25V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-038-00	s	CERAMIC 0.1uF 25V
C215	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-038-00	s	CERAMIC 0.1uF 25V
C220	1-163-038-00	s	CERAMIC 0.1uF 25V
C221	1-163-038-00	s	CERAMIC 0.1uF 25V
C222	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C223	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-038-00	s	CERAMIC 0.1uF 25V
C226	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C227	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C228	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C229	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C230	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C231	1-163-038-00	s	CERAMIC 0.1uF 25V
C232	1-163-038-00	s	CERAMIC 0.1uF 25V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-038-00	s	CERAMIC 0.1uF 25V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-038-00	s	CERAMIC 0.1uF 25V
C242	1-163-038-00	s	CERAMIC 0.1uF 25V
C243	1-163-038-00	s	CERAMIC 0.1uF 25V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-038-00	s	CERAMIC 0.1uF 25V
C250	1-163-038-00	s	CERAMIC 0.1uF 25V
C251	1-163-038-00	s	CERAMIC 0.1uF 25V
C252	1-163-038-00	s	CERAMIC 0.1uF 25V
C253	1-163-038-00	s	CERAMIC 0.1uF 25V
C254	1-163-038-00	s	CERAMIC 0.1uF 25V
C255	1-163-038-00	s	CERAMIC 0.1uF 25V
C256	1-163-038-00	s	CERAMIC 0.1uF 25V
C257	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C258	1-163-038-00	s	CERAMIC 0.1uF 25V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C261	1-163-038-00	s	CERAMIC 0.1uF 25V
C262	1-163-038-00	s	CERAMIC 0.1uF 25V
C263	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C264	1-163-038-00	s	CERAMIC 0.1uF 25V
C265	1-117-373-11	s	TANTALUM 150uF 20% 6.3V
C266	1-117-373-11	s	TANTALUM 150uF 20% 6.3V
C267	1-117-373-11	s	TANTALUM 150uF 20% 6.3V
C268	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C269	1-117-372-11	s	TANTALUM 100uF 20% 10V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C270	1-125-783-11	s	ELECT 820uF 20% 4V
C271	1-117-372-11	s	TANTALUM 100uF 20% 10V
C272	1-117-372-11	s	TANTALUM 100uF 20% 10V
C273	1-117-372-11	s	TANTALUM 100uF 20% 10V
C274	1-125-783-11	s	ELECT 820uF 20% 4V
C275	1-117-372-11	s	TANTALUM 100uF 20% 10V
C276	1-117-372-11	s	TANTALUM 100uF 20% 10V
C277	1-117-372-11	s	TANTALUM 100uF 20% 10V
C278	1-117-372-11	s	TANTALUM 100uF 20% 10V
C279	1-125-783-11	s	ELECT 820uF 20% 4V
C280	1-117-372-11	s	TANTALUM 100uF 20% 10V
C281	1-163-038-00	s	CERAMIC 0.1uF 25V
C282	1-163-038-00	s	CERAMIC 0.1uF 25V
C283	1-163-038-00	s	CERAMIC 0.1uF 25V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-038-00	s	CERAMIC 0.1uF 25V
C292	1-163-038-00	s	CERAMIC 0.1uF 25V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C296	1-163-038-00	s	CERAMIC 0.1uF 25V
C297	1-163-038-00	s	CERAMIC 0.1uF 25V
C298	1-163-038-00	s	CERAMIC 0.1uF 25V
C299	1-163-038-00	s	CERAMIC 0.1uF 25V
C300	1-163-038-00	s	CERAMIC 0.1uF 25V
C301	1-163-038-00	s	CERAMIC 0.1uF 25V
C302	1-163-038-00	s	CERAMIC 0.1uF 25V
C303	1-163-038-00	s	CERAMIC 0.1uF 25V
C304	1-163-038-00	s	CERAMIC 0.1uF 25V
C305	1-163-038-00	s	CERAMIC 0.1uF 25V
C306	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C307	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C308	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C309	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C310	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C311	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C312	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C313	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C314	1-163-038-00	s	CERAMIC 0.1uF 25V
C315	1-163-038-00	s	CERAMIC 0.1uF 25V
C316	1-163-038-00	s	CERAMIC 0.1uF 25V
C317	1-163-038-00	s	CERAMIC 0.1uF 25V
C318	1-163-038-00	s	CERAMIC 0.1uF 25V
C319	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C320	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C321	1-163-038-00	s	CERAMIC 0.1uF 25V
C322	1-163-038-00	s	CERAMIC 0.1uF 25V
C323	1-163-038-00	s	CERAMIC 0.1uF 25V
C324	1-163-038-00	s	CERAMIC 0.1uF 25V
C325	1-163-038-00	s	CERAMIC 0.1uF 25V
C326	1-163-038-00	s	CERAMIC 0.1uF 25V
C327	1-163-038-00	s	CERAMIC 0.1uF 25V
C339	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C340	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C341	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C349	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C350	1-163-038-00	s	CERAMIC 0.1uF 25V
C351	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C352	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C353	1-163-038-00	s	CERAMIC 0.1uF 25V
C354	1-163-038-00	s	CERAMIC 0.1uF 25V
C355	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C369	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C408	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C417	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C438	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C443	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C454	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C464	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C465	1-163-038-00	s	CERAMIC 0.1uF 25V
C466	1-163-038-00	s	CERAMIC 0.1uF 25V
C467	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C468	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C473	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C478	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C482	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C494	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C495	1-163-038-00	s	CERAMIC 0.1uF 25V
C496	1-163-038-00	s	CERAMIC 0.1uF 25V
C497	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C514	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C529	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C551	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C563	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C564	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C574	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C575	1-163-038-00	s	CERAMIC 0.1uF 25V
C576	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C583	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C584	1-163-038-00	s	CERAMIC 0.1uF 25V
C585	1-163-038-00	s	CERAMIC 0.1uF 25V
C586	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C587	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C608	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C609	1-163-038-00	s	CERAMIC 0.1uF 25V
C610	1-163-038-00	s	CERAMIC 0.1uF 25V
C611	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C616	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C626	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C631	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C637	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C646	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C657	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C665	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C678	1-164-346-11	s	CERAMIC 1uF 16V
C679	1-164-346-11	s	CERAMIC 1uF 16V
C680	1-164-346-11	s	CERAMIC 1uF 16V
C689	1-164-346-11	s	CERAMIC 1uF 16V
C690	1-163-038-00	s	CERAMIC 0.1uF 25V
C691	1-164-346-11	s	CERAMIC 1uF 16V
C692	1-163-038-00	s	CERAMIC 0.1uF 25V
C693	1-164-346-11	s	CERAMIC 1uF 16V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C694	1-163-038-00	s	CERAMIC 0.1uF 25V
C695	1-164-346-11	s	CERAMIC 1uF 16V
C696	1-163-038-00	s	CERAMIC 0.1uF 25V
C697	1-163-038-00	s	CERAMIC 0.1uF 25V
C698	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C699	1-163-038-00	s	CERAMIC 0.1uF 25V
C700	1-163-038-00	s	CERAMIC 0.1uF 25V
C701	1-164-346-11	s	CERAMIC 1uF 16V
C702	1-164-346-11	s	CERAMIC 1uF 16V
C703	1-164-346-11	s	CERAMIC 1uF 16V
C704	1-164-346-11	s	CERAMIC 1uF 16V
C705	1-163-038-00	s	CERAMIC 0.1uF 25V
C706	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C710	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C711	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C721	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C722	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C723	1-164-346-11	s	CERAMIC 1uF 16V
C724	1-163-038-00	s	CERAMIC 0.1uF 25V
C725	1-163-038-00	s	CERAMIC 0.1uF 25V
C726	1-164-346-11	s	CERAMIC 1uF 16V
C727	1-164-346-11	s	CERAMIC 1uF 16V
C728	1-164-346-11	s	CERAMIC 1uF 16V
C729	1-164-346-11	s	CERAMIC 1uF 16V
C730	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C737	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C738	1-163-038-00	s	CERAMIC 0.1uF 25V
C739	1-163-038-00	s	CERAMIC 0.1uF 25V
C750	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C751	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C752	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C753	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C754	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C755	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C756	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C757	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C758	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C759	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C760	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C761	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C762	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C763	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C764	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C765	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C766	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C767	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C768	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C769	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C770	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C771	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C772	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C773	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C774 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C775 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C776 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C777 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C778 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C779 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C780 *d	1-107-884-11	s	ELECT 1000uF 20% 16V

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C781 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C782 *d	1-107-884-11	s	ELECT 1000uF 20% 16V
C785 *d	1-163-038-00	s	CERAMIC 0.1uF 25V
C786 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C787 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C788 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C789 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C790 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C791 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C792 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C793 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C794 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C795 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C796 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C797 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C798 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C799 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
C800 *d	1-117-372-11	s	TANTALUM 100uF 20% 10V
CN2	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN3	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN4	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN5	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN6	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN7	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN8	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN9	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN10	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN11	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN12	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN13	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN14	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN15	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN16	1-779-393-11	o	CONNECTOR, BB 100P, MALE
D1	8-719-975-84	s	DIODE AY1101W-88
D2	8-719-975-84	s	DIODE AY1101W-88
D3	8-719-975-84	s	DIODE AY1101W-88
D4	8-719-975-84	s	DIODE AY1101W-88
D5	8-719-048-17	s	DIODE MBRS130LT3
D6	8-719-048-17	s	DIODE MBRS130LT3
D7	8-719-048-17	s	DIODE MBRS130LT3
D8	8-719-048-17	s	DIODE MBRS130LT3
D9	8-719-048-17	s	DIODE MBRS130LT3
D10	8-719-048-17	s	DIODE MBRS130LT3
D11	8-719-048-17	s	DIODE MBRS130LT3
D12	8-719-048-17	s	DIODE MBRS130LT3
D20	8-719-951-19	s	DIODE VR1101W-TR
D21	8-719-951-19	s	DIODE VR1101W-TR
D22	8-719-951-19	s	DIODE VR1101W-TR
D23	8-719-951-19	s	DIODE VR1101W-TR
D24	8-719-951-19	s	DIODE VR1101W-TR
D25	8-719-951-19	s	DIODE VR1101W-TR
D26	8-719-951-19	s	DIODE VR1101W-TR
D27	8-719-951-19	s	DIODE VR1101W-TR
D28	8-719-951-19	s	DIODE VR1101W-TR
D29	8-719-951-19	s	DIODE VR1101W-TR
D30	8-719-951-19	s	DIODE VR1101W-TR
D31	8-719-951-19	s	DIODE VR1101W-TR
D32	8-719-951-19	s	DIODE VR1101W-TR

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D33	8-719-951-19	s	DIODE VR1101W-TR
D34	8-719-951-19	s	DIODE VR1101W-TR
D35	8-719-975-84	s	DIODE AY1101W-88
D36	8-719-048-17	s	DIODE MBRS130LT3
D37	8-719-048-17	s	DIODE MBRS130LT3
F1 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F2 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F3 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F4 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F5 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F6 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F7 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F8 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F10 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F11 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F12 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
IC3	8-759-466-60	s	IC LTC1266CS-E2
IC4	8-759-466-60	s	IC LTC1266CS-E2
IC9	8-759-466-60	s	IC LTC1266CS-E2
IC10	8-759-466-60	s	IC LTC1266CS-E2
IC13	8-759-523-51	s	IC TC74ACT574FT(EL)
IC14	8-759-465-49	s	IC MC10ELT21DR2
IC15	8-759-466-59	s	IC CGS2535TVX
IC16	8-759-466-59	s	IC CGS2535TVX
IC17	8-759-386-27	s	IC 74LCX04MTCX
IC18	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC19	8-759-466-21	s	IC S4405B-80
IC20	8-759-464-46	s	IC CXD8899J
IC21	8-759-464-46	s	IC CXD8899J
IC22 *d	8-759-464-48	s	IC CXD8900J
IC23	8-759-464-46	s	IC CXD8899J
IC24	8-759-386-27	s	IC 74LCX04MTCX
IC25	8-759-464-46	s	IC CXD8899J
IC26 *d	8-759-464-48	s	IC CXD8900J
IC27	8-759-271-78	s	IC DS26C32ATM
IC28	8-759-271-82	s	IC DS3695ATM
IC29 *d	8-759-464-48	s	IC CXD8900J
IC30 *d	8-759-464-48	s	IC CXD8900J
IC31 *d	8-759-464-48	s	IC CXD8900J
IC32	8-759-464-46	s	IC CXD8899J
IC33	8-759-464-46	s	IC CXD8899J
IC34 *d	8-759-464-48	s	IC CXD8900J
IC36	8-759-469-98	s	IC CAT93C66K-LE10
IC37	8-759-386-27	s	IC 74LCX04MTCX
IC38	8-759-505-00	s	IC CXD8052Q
IC39	8-759-541-57	o	IC EPM7064-RXINITV1

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC40 *d	8-759-464-48	s	IC CXD8900J
IC41 *d	8-759-464-48	s	IC CXD8900J
IC42 *d	8-759-464-48	s	IC CXD8900J
IC43 *d	8-759-464-48	s	IC CXD8900J
IC44 *d	8-759-464-48	s	IC CXD8900J
IC45 *d	8-759-464-48	s	IC CXD8900J
IC46 *d	8-759-464-48	s	IC CXD8900J
IC47 *d	8-759-464-48	s	IC CXD8900J
IC48 *d	8-759-464-48	s	IC CXD8900J
IC49 *d	8-759-464-48	s	IC CXD8900J
IC50 *d	8-759-464-48	s	IC CXD8900J
IC51 *d	8-759-464-48	s	IC CXD8900J
IC52	8-759-464-46	s	IC CXD8899J
IC53	8-759-464-46	s	IC CXD8899J
IC54	8-759-464-46	s	IC CXD8899J
IC55	8-759-464-46	s	IC CXD8899J
IC56	8-759-464-46	s	IC CXD8899J
IC57	8-759-464-46	s	IC CXD8899J
IC58	8-759-464-46	s	IC CXD8899J
IC59	8-759-464-46	s	IC CXD8899J
IC60	8-759-464-46	s	IC CXD8899J
IC61	8-759-464-46	s	IC CXD8899J
IC62	8-759-464-46	s	IC CXD8899J
IC63	8-759-464-46	s	IC CXD8899J
IC64	8-759-386-27	s	IC 74LCX04MTCX
IC65	8-759-386-27	s	IC 74LCX04MTCX
IC66	8-759-386-27	s	IC 74LCX04MTCX
IC67	8-759-386-27	s	IC 74LCX04MTCX
IC68	8-759-386-27	s	IC 74LCX04MTCX
IC69	8-759-386-27	s	IC 74LCX04MTCX
IC70	8-759-186-55	s	IC TC74VHC165F
IC71	8-759-523-45	s	IC TC74ACT244FT(EL)
IC72	8-759-456-26	s	IC 74LCX541MTCX
IC73	8-759-456-26	s	IC 74LCX541MTCX
IC74	8-759-456-26	s	IC 74LCX541MTCX
IC75	8-759-456-26	s	IC 74LCX541MTCX
IC76	8-759-456-26	s	IC 74LCX541MTCX
IC77	8-759-186-55	s	IC TC74VHC165F
IC78	8-759-386-27	s	IC 74LCX04MTCX
IC79 *d	8-759-464-48	s	IC CXD8900J
IC80 *d	8-759-464-48	s	IC CXD8900J
IC81 *d	8-759-464-48	s	IC CXD8900J
IC82 *d	8-759-464-48	s	IC CXD8900J
IC83 *d	8-759-464-48	s	IC CXD8900J
IC84 *d	8-759-464-48	s	IC CXD8900J
IC85 *d	8-759-464-48	s	IC CXD8900J
IC86 *d	8-759-464-48	s	IC CXD8900J
IC87 *d	8-759-464-48	s	IC CXD8900J
IC88 *d	8-759-464-48	s	IC CXD8900J
IC89 *d	8-759-464-48	s	IC CXD8900J
IC90 *d	8-759-464-48	s	IC CXD8900J
IC91	8-759-464-46	s	IC CXD8899J
IC92	8-759-464-46	s	IC CXD8899J
IC93	8-759-464-46	s	IC CXD8899J
IC94	8-759-464-46	s	IC CXD8899J
IC95	8-759-464-46	s	IC CXD8899J
IC96	8-759-464-46	s	IC CXD8899J
IC97	8-759-464-46	s	IC CXD8899J
IC98	8-759-464-46	s	IC CXD8899J

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC99	8-759-464-46	s	IC CXD8899J
IC100	8-759-464-46	s	IC CXD8899J
IC101	8-759-464-46	s	IC CXD8899J
IC102	8-759-464-46	s	IC CXD8899J
IC103	8-759-386-27	s	IC 74LCX04MTCX
IC104	8-759-386-27	s	IC 74LCX04MTCX
IC105	8-759-386-27	s	IC 74LCX04MTCX
IC106	8-759-386-27	s	IC 74LCX04MTCX
IC107	8-759-386-27	s	IC 74LCX04MTCX
IC108	8-759-386-27	s	IC 74LCX04MTCX
IC200	8-759-448-56	s	IC TC74AC240F-EL
IC201	8-759-389-48	s	IC 74LCX16374MTDX
IC202	8-759-523-49	s	IC TC74ACT541FT(EL)
IC203	8-759-389-48	s	IC 74LCX16374MTDX
IC204	8-759-523-49	s	IC TC74ACT541FT(EL)
IC205	8-759-466-60	s	IC LTC1266CS-E2
IC206	8-759-466-59	s	IC CGS2535TVX
IC207	8-759-389-48	s	IC 74LCX16374MTDX
IC208	8-759-466-59	s	IC CGS2535TVX
IC209	8-759-389-48	s	IC 74LCX16374MTDX
IC210	8-759-389-48	s	IC 74LCX16374MTDX
IC211	8-759-389-48	s	IC 74LCX16374MTDX
IC212	8-759-389-48	s	IC 74LCX16374MTDX
IC213	8-759-389-48	s	IC 74LCX16374MTDX
IC214	8-759-466-59	s	IC CGS2535TVX
IC215	8-759-389-48	s	IC 74LCX16374MTDX
IC216	8-759-389-48	s	IC 74LCX16374MTDX
IC217	8-759-389-48	s	IC 74LCX16374MTDX
IC218	8-759-389-48	s	IC 74LCX16374MTDX
IC219	8-759-389-48	s	IC 74LCX16374MTDX
IC220	8-759-389-48	s	IC 74LCX16374MTDX
IC221	8-759-389-48	s	IC 74LCX16374MTDX
IC222	8-759-466-59	s	IC CGS2535TVX
IC223	8-759-468-08	s	IC 74LVX3L384QSCX
IC224	8-759-468-08	s	IC 74LVX3L384QSCX
IC225	8-759-389-48	s	IC 74LCX16374MTDX
IC226	8-759-389-48	s	IC 74LCX16374MTDX
IC227	8-759-389-48	s	IC 74LCX16374MTDX
IC228	8-759-389-48	s	IC 74LCX16374MTDX
IC229	8-759-389-48	s	IC 74LCX16374MTDX
IC230	8-759-389-48	s	IC 74LCX16374MTDX
IC231	8-759-389-48	s	IC 74LCX16374MTDX
IC232	8-759-389-48	s	IC 74LCX16374MTDX
IC233	8-759-389-48	s	IC 74LCX16374MTDX
IC234	8-759-456-26	s	IC 74LCX541MTCX
IC235	8-759-389-48	s	IC 74LCX16374MTDX
IC236	8-759-389-48	s	IC 74LCX16374MTDX
IC237	8-759-523-49	s	IC TC74ACT541FT(EL)
IC238	8-759-523-49	s	IC TC74ACT541FT(EL)
IC239	8-759-389-48	s	IC 74LCX16374MTDX
IC240	8-759-456-26	s	IC 74LCX541MTCX
IC241	8-759-523-49	s	IC TC74ACT541FT(EL)
IC242	8-759-523-49	s	IC TC74ACT541FT(EL)
IC243	8-759-389-48	s	IC 74LCX16374MTDX
IC244	8-759-389-48	s	IC 74LCX16374MTDX
IC245	8-759-389-48	s	IC 74LCX16374MTDX
IC246	8-759-389-48	s	IC 74LCX16374MTDX
IC247	8-759-523-49	s	IC TC74ACT541FT(EL)
IC248	8-759-523-36	s	IC TC74ACT04FT(EL)

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC249	8-759-523-49	s	IC TC74ACT541FT(EL)
IC250	8-759-523-49	s	IC TC74ACT541FT(EL)
IC251	8-759-186-55	s	IC TC74VHC165F
IC252	8-759-186-55	s	IC TC74VHC165F
IC253	8-759-523-49	s	IC TC74ACT541FT(EL)
IC254	8-759-523-49	s	IC TC74ACT541FT(EL)
IC255	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC256	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC257	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC258	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC259	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC260	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC261	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC262	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC263	8-759-386-27	s	IC 74LCX04MTCX
IC264	8-759-386-27	s	IC 74LCX04MTCX
IC265	8-759-386-27	s	IC 74LCX04MTCX
IC300	8-759-389-45	s	IC 74LCX16244MTDX
IC301	8-759-389-45	s	IC 74LCX16244MTDX
IC302	8-759-389-45	s	IC 74LCX16244MTDX
IC303	8-759-389-45	s	IC 74LCX16244MTDX
IC304	8-759-389-45	s	IC 74LCX16244MTDX
IC305	8-759-389-45	s	IC 74LCX16244MTDX
IS39	*b 1-251-731-11	o	SOCKET, IC 68P
	*a 1-251-352-11	o	SOCKET, IC(PLCC) 68P
L1	*e 1-421-370-00	s	COIL, CHOKE
L5	1-469-060-11	s	INDUCTOR 6.1uH
L6	1-469-060-11	s	INDUCTOR 6.1uH
L7	1-469-060-11	s	INDUCTOR 6.1uH
L8	1-469-060-11	s	INDUCTOR 6.1uH
L15	1-469-060-11	s	INDUCTOR 6.1uH
Q1	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q2	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q3	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q4	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q5	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q6	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q7	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q8	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q9	8-729-025-01	s	TRANSISTOR SI9410DY-T1
Q10	8-729-025-01	s	TRANSISTOR SI9410DY-T1
R1	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R2	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R3	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R4	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R5	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R6	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R7	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R9	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R10	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R11	*d 1-216-341-11	s	RESISTOR, METAL FILM 0.22 1W
R12	*d 1-216-341-11	s	RESISTOR, METAL FILM 0.22 1W
R47	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R50	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R51	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R64	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R65	1-218-756-11	s	METAL 150k 0.5% 1/10W

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R66	1-216-688-11	s	METAL, CHIP 36k 0.5% 1/10W
R67	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W
R74	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R76	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R78	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R79	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R86	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R97	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R108	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R109	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R116	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R117	1-218-756-11	s	METAL 150k 0.5% 1/10W
R118	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R119	1-218-756-11	s	METAL 150k 0.5% 1/10W
R126	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R127	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R138	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R149	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R160	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R171	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R182	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R193	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R204	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R215	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R226	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R237	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R248	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R259	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R278	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R289	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R300	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R311	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R322	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R333	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R344	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R355	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R366	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R377	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R388	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R399	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R400	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R401	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R402	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R403	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R502	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R505	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R507	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R508	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R510	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R512	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R513	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R514	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R517	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R519	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R520	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R521	1-216-295-91	s	RES, CHIP 0
R522	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R523	1-216-295-91	s	RES, CHIP 0
R524	1-216-295-91	s	RES, CHIP 0

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R525	1-216-295-91	s	RES, CHIP 0
R526	1-216-295-91	s	RES, CHIP 0
R527	1-216-295-91	s	RES, CHIP 0
R528	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R529	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R531	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R533	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R534	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R537	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R541	1-216-295-91	s	RES, CHIP 0
R542	1-216-295-91	s	RES, CHIP 0
R543	1-216-295-91	s	RES, CHIP 0
R544	1-216-295-91	s	RES, CHIP 0
R545	1-216-295-91	s	RES, CHIP 0
R546	1-216-295-91	s	RES, CHIP 0
R549	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R550	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R551	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R552	1-216-295-91	s	RES, CHIP 0
R553	1-216-295-91	s	RES, CHIP 0
R554	1-216-295-91	s	RES, CHIP 0
R555	1-216-295-91	s	RES, CHIP 0
R556	1-216-295-91	s	RES, CHIP 0
R557	1-216-295-91	s	RES, CHIP 0
R558	1-216-295-91	s	RES, CHIP 0
R559	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R560	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R562	1-216-295-91	s	RES, CHIP 0
R563	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R564	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R566	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R567	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R570	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R573	1-216-295-91	s	RES, CHIP 0
R574	1-216-295-91	s	RES, CHIP 0
R575	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R576	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R577	1-216-295-91	s	RES, CHIP 0
R578	1-216-295-91	s	RES, CHIP 0
R579	1-216-295-91	s	RES, CHIP 0
R580	1-216-295-91	s	RES, CHIP 0
R582	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R584	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R585	1-216-295-91	s	RES, CHIP 0
R586	1-216-295-91	s	RES, CHIP 0
R587	1-216-295-91	s	RES, CHIP 0
R588	1-216-295-91	s	RES, CHIP 0
R589	1-216-295-91	s	RES, CHIP 0
R590	1-216-295-91	s	RES, CHIP 0
R591	1-216-295-91	s	RES, CHIP 0
R592	1-216-295-91	s	RES, CHIP 0
R593	1-216-295-91	s	RES, CHIP 0
R594	1-216-295-91	s	RES, CHIP 0
R595	1-216-295-91	s	RES, CHIP 0
R596	1-216-295-91	s	RES, CHIP 0
R597	1-216-295-91	s	RES, CHIP 0
R598	1-216-295-91	s	RES, CHIP 0
R599	1-216-295-91	s	RES, CHIP 0
R600	1-216-295-91	s	RES, CHIP 0

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R601	1-216-295-91	s	RES, CHIP 0
R602	1-216-295-91	s	RES, CHIP 0
R603	1-216-295-91	s	RES, CHIP 0
R604	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R606	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R609	1-216-295-91	s	RES, CHIP 0
R610	1-216-295-91	s	RES, CHIP 0
R611	1-216-295-91	s	RES, CHIP 0
R612	1-216-295-91	s	RES, CHIP 0
R613	1-216-295-91	s	RES, CHIP 0
R614	1-216-295-91	s	RES, CHIP 0
R615	1-216-295-91	s	RES, CHIP 0
R616	1-216-295-91	s	RES, CHIP 0
R617	1-216-295-91	s	RES, CHIP 0
R618	1-216-295-91	s	RES, CHIP 0
R619	1-216-295-91	s	RES, CHIP 0
R620	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R622	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R624	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R625	1-216-295-91	s	RES, CHIP 0
R626	1-216-295-91	s	RES, CHIP 0
R627	1-216-295-91	s	RES, CHIP 0
R628	1-216-295-91	s	RES, CHIP 0
R629	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R630	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R631	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R633	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R634	1-216-295-91	s	RES, CHIP 0
R635	1-216-295-91	s	RES, CHIP 0
R636	1-216-295-91	s	RES, CHIP 0
R637	1-216-295-91	s	RES, CHIP 0
R638	1-216-295-91	s	RES, CHIP 0
R639	1-216-295-91	s	RES, CHIP 0
R640	1-216-295-91	s	RES, CHIP 0
R641	1-216-295-91	s	RES, CHIP 0
R642	1-216-295-91	s	RES, CHIP 0
R645	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R648	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R649	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R651	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R655	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R656	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R659	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R660	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R662	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R665	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R667	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R668	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R670	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R673	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R675	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R677	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R679	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R681	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R683	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R684	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R686	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R688	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R690	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R692	1-218-776-11	s	METAL 1M 0.5% 1/10W
R693	1-218-776-11	s	METAL 1M 0.5% 1/10W
R694	1-218-776-11	s	METAL 1M 0.5% 1/10W
R695	1-218-776-11	s	METAL 1M 0.5% 1/10W
R696	1-218-776-11	s	METAL 1M 0.5% 1/10W
R697	1-218-776-11	s	METAL 1M 0.5% 1/10W
R698	1-218-776-11	s	METAL 1M 0.5% 1/10W
R699	1-218-776-11	s	METAL 1M 0.5% 1/10W
R700	1-218-776-11	s	METAL 1M 0.5% 1/10W
R701	1-218-776-11	s	METAL 1M 0.5% 1/10W
R702	1-218-776-11	s	METAL 1M 0.5% 1/10W
R704	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R705	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R706	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R708	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W
R709	1-216-688-11	s	METAL, CHIP 36k 0.5% 1/10W
R710	1-218-776-11	s	METAL 1M 0.5% 1/10W
R711	1-218-776-11	s	METAL 1M 0.5% 1/10W
R712	1-218-776-11	s	METAL 1M 0.5% 1/10W
R713	1-218-776-11	s	METAL 1M 0.5% 1/10W
R714	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R716	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R718	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R719	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R720	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R721	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R722	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R723	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R724	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R725	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R726	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R727	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R728	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R729	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R730	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R731	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R732	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R733	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB10	1-234-078-11	s	RES, CHIP NETWORK 47
RB11	1-234-078-11	s	RES, CHIP NETWORK 47
RB12	1-234-078-11	s	RES, CHIP NETWORK 47
RB13	1-234-078-11	s	RES, CHIP NETWORK 47
RB14	1-234-078-11	s	RES, CHIP NETWORK 47
RB15	1-234-078-11	s	RES, CHIP NETWORK 47
RB16	1-234-078-11	s	RES, CHIP NETWORK 47
RB17	1-234-078-11	s	RES, CHIP NETWORK 47
RB18	1-234-078-11	s	RES, CHIP NETWORK 47
RB19	1-234-078-11	s	RES, CHIP NETWORK 47
RB20	1-234-078-11	s	RES, CHIP NETWORK 47

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB21	1-234-078-11	s	RES, CHIP NETWORK 47
RB22	1-234-078-11	s	RES, CHIP NETWORK 47
RB23	1-234-078-11	s	RES, CHIP NETWORK 47
RB24	1-234-078-11	s	RES, CHIP NETWORK 47
RB25	1-234-078-11	s	RES, CHIP NETWORK 47
RB26	1-234-078-11	s	RES, CHIP NETWORK 47
RB27	1-234-078-11	s	RES, CHIP NETWORK 47
RB28	1-234-078-11	s	RES, CHIP NETWORK 47
RB29	1-234-078-11	s	RES, CHIP NETWORK 47
RB30	1-234-078-11	s	RES, CHIP NETWORK 47
RB31	1-234-078-11	s	RES, CHIP NETWORK 47
RB32	1-234-078-11	s	RES, CHIP NETWORK 47
RB33	1-234-078-11	s	RES, CHIP NETWORK 47
RB34	1-234-078-11	s	RES, CHIP NETWORK 47
RB35	1-234-078-11	s	RES, CHIP NETWORK 47
RB36	1-234-078-11	s	RES, CHIP NETWORK 47
RB37	1-234-078-11	s	RES, CHIP NETWORK 47
RB38	1-234-078-11	s	RES, CHIP NETWORK 47
RB39	1-234-078-11	s	RES, CHIP NETWORK 47
RB40	1-234-078-11	s	RES, CHIP NETWORK 47
RB41	1-234-078-11	s	RES, CHIP NETWORK 47
RB42	1-234-078-11	s	RES, CHIP NETWORK 47
RB43	1-234-078-11	s	RES, CHIP NETWORK 47
RB44	1-234-078-11	s	RES, CHIP NETWORK 47
RB45	1-234-078-11	s	RES, CHIP NETWORK 47
RB46	1-234-078-11	s	RES, CHIP NETWORK 47
RB47	1-234-078-11	s	RES, CHIP NETWORK 47
RB48	1-234-078-11	s	RES, CHIP NETWORK 47
RB49	1-234-078-11	s	RES, CHIP NETWORK 47
RB50	1-234-078-11	s	RES, CHIP NETWORK 47
RB51	1-234-078-11	s	RES, CHIP NETWORK 47
RB52	1-234-078-11	s	RES, CHIP NETWORK 47
RB53	1-234-078-11	s	RES, CHIP NETWORK 47
RB54	1-234-078-11	s	RES, CHIP NETWORK 47
RB55	1-234-078-11	s	RES, CHIP NETWORK 47
RB56	1-234-078-11	s	RES, CHIP NETWORK 47
RB57	1-234-078-11	s	RES, CHIP NETWORK 47
RB58	1-234-078-11	s	RES, CHIP NETWORK 47
RB59	1-234-078-11	s	RES, CHIP NETWORK 47
RB60	1-234-078-11	s	RES, CHIP NETWORK 47
RB61	1-234-078-11	s	RES, CHIP NETWORK 47
RB62	1-234-078-11	s	RES, CHIP NETWORK 47
RB63	1-234-078-11	s	RES, CHIP NETWORK 47
RB64	1-234-078-11	s	RES, CHIP NETWORK 47
RB65	1-234-078-11	s	RES, CHIP NETWORK 47
RB66	1-234-078-11	s	RES, CHIP NETWORK 47
RB67	1-234-078-11	s	RES, CHIP NETWORK 47
RB68	1-234-078-11	s	RES, CHIP NETWORK 47
RB69	1-234-078-11	s	RES, CHIP NETWORK 47
RB70	1-234-078-11	s	RES, CHIP NETWORK 47
RB71	1-234-078-11	s	RES, CHIP NETWORK 47
RB72	1-234-078-11	s	RES, CHIP NETWORK 47
RB73	1-234-078-11	s	RES, CHIP NETWORK 47
RB74	1-234-078-11	s	RES, CHIP NETWORK 47
RB75	1-234-078-11	s	RES, CHIP NETWORK 47
RB76	1-234-078-11	s	RES, CHIP NETWORK 47
RB77	1-234-078-11	s	RES, CHIP NETWORK 47
RB78	1-234-078-11	s	RES, CHIP NETWORK 47
RB79	1-234-078-11	s	RES, CHIP NETWORK 47

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB80	1-234-078-11	s	RES, CHIP NETWORK 47
RB81	1-234-078-11	s	RES, CHIP NETWORK 47
RB82	1-234-078-11	s	RES, CHIP NETWORK 47
RB83	1-234-078-11	s	RES, CHIP NETWORK 47
RB84	1-234-078-11	s	RES, CHIP NETWORK 47
RB85	1-234-078-11	s	RES, CHIP NETWORK 47
RB86	1-234-078-11	s	RES, CHIP NETWORK 47
RB87	1-234-078-11	s	RES, CHIP NETWORK 47
RB88	1-234-078-11	s	RES, CHIP NETWORK 47
RB89	1-234-078-11	s	RES, CHIP NETWORK 47
RB90	1-234-078-11	s	RES, CHIP NETWORK 47
RB102	1-233-448-11	s	RES, CHIP NETWORK 22
RB103	1-233-448-11	s	RES, CHIP NETWORK 22
RB104	1-233-448-11	s	RES, CHIP NETWORK 22
RB105	1-233-448-11	s	RES, CHIP NETWORK 22
RB106	1-233-448-11	s	RES, CHIP NETWORK 22
RB107	1-233-448-11	s	RES, CHIP NETWORK 22
RB108	1-233-448-11	s	RES, CHIP NETWORK 22
RB109	1-233-448-11	s	RES, CHIP NETWORK 22
RB112	1-233-448-11	s	RES, CHIP NETWORK 22
RB113	1-233-448-11	s	RES, CHIP NETWORK 22
RB114	1-233-448-11	s	RES, CHIP NETWORK 22
RB115	1-233-448-11	s	RES, CHIP NETWORK 22
RB116	1-233-448-11	s	RES, CHIP NETWORK 22
RB117	1-233-448-11	s	RES, CHIP NETWORK 22
RB118	1-233-448-11	s	RES, CHIP NETWORK 22
RB119	1-233-448-11	s	RES, CHIP NETWORK 22
RB132	1-233-448-11	s	RES, CHIP NETWORK 22
RB133	1-233-448-11	s	RES, CHIP NETWORK 22
RB134	1-233-448-11	s	RES, CHIP NETWORK 22
RB135	1-233-448-11	s	RES, CHIP NETWORK 22
RB136	1-233-448-11	s	RES, CHIP NETWORK 22
RB137	1-233-448-11	s	RES, CHIP NETWORK 22
RB138	1-233-448-11	s	RES, CHIP NETWORK 22
RB139	1-233-448-11	s	RES, CHIP NETWORK 22
RB200	1-233-448-11	s	RES, CHIP NETWORK 22
RB201	1-233-448-11	s	RES, CHIP NETWORK 22
RB202	1-233-448-11	s	RES, CHIP NETWORK 22
RB203	1-233-448-11	s	RES, CHIP NETWORK 22
RB204	1-233-448-11	s	RES, CHIP NETWORK 22
RB205	1-233-448-11	s	RES, CHIP NETWORK 22
RB206	1-233-448-11	s	RES, CHIP NETWORK 22
RB207	1-233-448-11	s	RES, CHIP NETWORK 22
RB208	1-233-448-11	s	RES, CHIP NETWORK 22
RB209	1-233-448-11	s	RES, CHIP NETWORK 22
RB210	1-233-448-11	s	RES, CHIP NETWORK 22
RB211	1-233-448-11	s	RES, CHIP NETWORK 22
RB212	1-233-448-11	s	RES, CHIP NETWORK 22
RB213	1-233-448-11	s	RES, CHIP NETWORK 22
RB214	1-233-448-11	s	RES, CHIP NETWORK 22
RB215	1-233-448-11	s	RES, CHIP NETWORK 22
RB216	1-233-448-11	s	RES, CHIP NETWORK 22
RB217	1-233-448-11	s	RES, CHIP NETWORK 22
RB218	1-233-448-11	s	RES, CHIP NETWORK 22
RB219	1-233-448-11	s	RES, CHIP NETWORK 22
RB220	1-233-448-11	s	RES, CHIP NETWORK 22
RB221	1-233-448-11	s	RES, CHIP NETWORK 22
RB222	1-233-448-11	s	RES, CHIP NETWORK 22
RB223	1-233-448-11	s	RES, CHIP NETWORK 22

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB224	1-233-448-11	s	RES, CHIP NETWORK 22
RB225	1-233-448-11	s	RES, CHIP NETWORK 22
RB226	1-233-448-11	s	RES, CHIP NETWORK 22
RB227	1-233-448-11	s	RES, CHIP NETWORK 22
RB228	1-233-448-11	s	RES, CHIP NETWORK 22
RB229	1-233-448-11	s	RES, CHIP NETWORK 22
RB230	1-233-448-11	s	RES, CHIP NETWORK 22
RB231	1-233-448-11	s	RES, CHIP NETWORK 22
RB232	1-233-448-11	s	RES, CHIP NETWORK 22
RB233	1-233-448-11	s	RES, CHIP NETWORK 22
RB234	1-233-448-11	s	RES, CHIP NETWORK 22
RB235	1-233-448-11	s	RES, CHIP NETWORK 22
RB236	1-233-448-11	s	RES, CHIP NETWORK 22
RB237	1-233-448-11	s	RES, CHIP NETWORK 22
RB238	1-233-448-11	s	RES, CHIP NETWORK 22
RB239	1-233-448-11	s	RES, CHIP NETWORK 22
RB240	1-233-448-11	s	RES, CHIP NETWORK 22
RB241	1-233-448-11	s	RES, CHIP NETWORK 22
RB242	1-233-448-11	s	RES, CHIP NETWORK 22
RB243	1-233-448-11	s	RES, CHIP NETWORK 22
RB244	1-233-448-11	s	RES, CHIP NETWORK 22
RB245	1-233-448-11	s	RES, CHIP NETWORK 22
RB246	1-233-448-11	s	RES, CHIP NETWORK 22
RB247	1-233-448-11	s	RES, CHIP NETWORK 22
RB248	1-233-448-11	s	RES, CHIP NETWORK 22
RB249	1-233-448-11	s	RES, CHIP NETWORK 22
RB250	1-233-448-11	s	RES, CHIP NETWORK 22
RB251	1-233-448-11	s	RES, CHIP NETWORK 22
RB252	1-233-448-11	s	RES, CHIP NETWORK 22
RB253	1-233-448-11	s	RES, CHIP NETWORK 22
RB254	1-233-448-11	s	RES, CHIP NETWORK 22
RB255	1-233-448-11	s	RES, CHIP NETWORK 22
RB256	1-233-448-11	s	RES, CHIP NETWORK 22
RB257	1-233-448-11	s	RES, CHIP NETWORK 22
RB258	1-233-448-11	s	RES, CHIP NETWORK 22
RB259	1-233-448-11	s	RES, CHIP NETWORK 22
RB260	1-233-448-11	s	RES, CHIP NETWORK 22
RB261	1-233-448-11	s	RES, CHIP NETWORK 22
RB262	1-233-448-11	s	RES, CHIP NETWORK 22
RB263	1-233-448-11	s	RES, CHIP NETWORK 22
RB264	1-233-448-11	s	RES, CHIP NETWORK 22
RB265	1-233-448-11	s	RES, CHIP NETWORK 22
RB266	1-233-448-11	s	RES, CHIP NETWORK 22
RB267	1-233-448-11	s	RES, CHIP NETWORK 22
RB268	1-233-448-11	s	RES, CHIP NETWORK 22
RB269	1-233-448-11	s	RES, CHIP NETWORK 22
RB270	1-233-448-11	s	RES, CHIP NETWORK 22
RB271	1-233-448-11	s	RES, CHIP NETWORK 22
RB272	1-233-448-11	s	RES, CHIP NETWORK 22
RB273	1-233-448-11	s	RES, CHIP NETWORK 22
RB274	1-233-448-11	s	RES, CHIP NETWORK 22
RB275	1-233-448-11	s	RES, CHIP NETWORK 22
RB276	1-233-448-11	s	RES, CHIP NETWORK 22
RB277	1-233-448-11	s	RES, CHIP NETWORK 22
RB278	1-233-448-11	s	RES, CHIP NETWORK 22
RB279	1-233-448-11	s	RES, CHIP NETWORK 22
RB280	1-233-448-11	s	RES, CHIP NETWORK 22
RB281	1-233-448-11	s	RES, CHIP NETWORK 22
RB282	1-233-448-11	s	RES, CHIP NETWORK 22

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB283	1-233-448-11	s	RES, CHIP NETWORK 22
RB284	1-233-448-11	s	RES, CHIP NETWORK 22
RB285	1-233-448-11	s	RES, CHIP NETWORK 22
RB286	1-233-448-11	s	RES, CHIP NETWORK 22
RB287	1-233-448-11	s	RES, CHIP NETWORK 22
RB288	1-233-448-11	s	RES, CHIP NETWORK 22
RB289	1-233-448-11	s	RES, CHIP NETWORK 22
RB290	1-233-448-11	s	RES, CHIP NETWORK 22
RB291	1-233-448-11	s	RES, CHIP NETWORK 22
RB292	1-233-448-11	s	RES, CHIP NETWORK 22
RB293	1-233-448-11	s	RES, CHIP NETWORK 22
RB294	1-233-448-11	s	RES, CHIP NETWORK 22
RB295	1-233-448-11	s	RES, CHIP NETWORK 22
RB296	1-233-448-11	s	RES, CHIP NETWORK 22
RB297	1-233-448-11	s	RES, CHIP NETWORK 22
RB298	1-233-448-11	s	RES, CHIP NETWORK 22
RB299	1-233-448-11	s	RES, CHIP NETWORK 22
RB300	1-233-448-11	s	RES, CHIP NETWORK 22
RB301	1-233-448-11	s	RES, CHIP NETWORK 22
RB302	1-233-448-11	s	RES, CHIP NETWORK 22
RB303	1-233-448-11	s	RES, CHIP NETWORK 22
RB304	1-233-448-11	s	RES, CHIP NETWORK 22
RB305	1-233-448-11	s	RES, CHIP NETWORK 22
RB306	1-233-448-11	s	RES, CHIP NETWORK 22
RB307	1-233-448-11	s	RES, CHIP NETWORK 22
RB308	1-233-448-11	s	RES, CHIP NETWORK 22
RB309	1-233-448-11	s	RES, CHIP NETWORK 22
RB310	1-233-448-11	s	RES, CHIP NETWORK 22
RB311	1-233-448-11	s	RES, CHIP NETWORK 22
RB312	1-233-448-11	s	RES, CHIP NETWORK 22
RB313	1-233-448-11	s	RES, CHIP NETWORK 22
RB314	1-233-448-11	s	RES, CHIP NETWORK 22
RB315	1-233-448-11	s	RES, CHIP NETWORK 22
RB316	1-233-448-11	s	RES, CHIP NETWORK 22
RB317	1-233-448-11	s	RES, CHIP NETWORK 22
RB318	1-233-448-11	s	RES, CHIP NETWORK 22
RB319	1-233-448-11	s	RES, CHIP NETWORK 22
RB320	1-233-448-11	s	RES, CHIP NETWORK 22
RB321	1-233-448-11	s	RES, CHIP NETWORK 22
RB322	1-233-448-11	s	RES, CHIP NETWORK 22
RB323	1-233-448-11	s	RES, CHIP NETWORK 22
RB324	1-233-448-11	s	RES, CHIP NETWORK 22
RB325	1-233-448-11	s	RES, CHIP NETWORK 22
RB326	1-233-448-11	s	RES, CHIP NETWORK 22
RB327	1-233-448-11	s	RES, CHIP NETWORK 22
RB328	1-233-448-11	s	RES, CHIP NETWORK 22
RB329	1-233-448-11	s	RES, CHIP NETWORK 22
RB330	1-233-448-11	s	RES, CHIP NETWORK 22
RB331	1-233-448-11	s	RES, CHIP NETWORK 22
RB332	1-233-448-11	s	RES, CHIP NETWORK 22
RB333	1-233-448-11	s	RES, CHIP NETWORK 22
RB334	1-233-448-11	s	RES, CHIP NETWORK 22
RB335	1-233-448-11	s	RES, CHIP NETWORK 22
RB336	1-233-448-11	s	RES, CHIP NETWORK 22
RB337	1-233-448-11	s	RES, CHIP NETWORK 22
RB338	1-233-448-11	s	RES, CHIP NETWORK 22
RB339	1-233-448-11	s	RES, CHIP NETWORK 22
RB340	1-233-448-11	s	RES, CHIP NETWORK 22
RB341	1-233-448-11	s	RES, CHIP NETWORK 22

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB342	1-233-448-11	s	RES, CHIP NETWORK 22
RB343	1-233-448-11	s	RES, CHIP NETWORK 22
RB344	1-233-448-11	s	RES, CHIP NETWORK 22
RB345	1-233-448-11	s	RES, CHIP NETWORK 22
RB346	1-233-448-11	s	RES, CHIP NETWORK 22
RB347	1-233-448-11	s	RES, CHIP NETWORK 22
RB348	1-233-448-11	s	RES, CHIP NETWORK 22
RB349	1-233-448-11	s	RES, CHIP NETWORK 22
RB350	1-233-448-11	s	RES, CHIP NETWORK 22
RB351	1-233-448-11	s	RES, CHIP NETWORK 22
RB352	1-233-448-11	s	RES, CHIP NETWORK 22
RB353	1-233-448-11	s	RES, CHIP NETWORK 22
RB354	1-233-448-11	s	RES, CHIP NETWORK 22
RB355	1-233-448-11	s	RES, CHIP NETWORK 22
RB356	1-233-448-11	s	RES, CHIP NETWORK 22
RB357	1-233-448-11	s	RES, CHIP NETWORK 22
RB358	1-233-448-11	s	RES, CHIP NETWORK 22
RB359	1-233-448-11	s	RES, CHIP NETWORK 22
RB360	1-233-448-11	s	RES, CHIP NETWORK 22
RB361	1-233-448-11	s	RES, CHIP NETWORK 22
RB362	1-233-448-11	s	RES, CHIP NETWORK 22
RB363	1-233-448-11	s	RES, CHIP NETWORK 22
RB364	1-233-448-11	s	RES, CHIP NETWORK 22
RB365	1-233-448-11	s	RES, CHIP NETWORK 22
RB366	1-233-448-11	s	RES, CHIP NETWORK 22
RB367	1-233-448-11	s	RES, CHIP NETWORK 22
RB368	1-233-448-11	s	RES, CHIP NETWORK 22
RB369	1-233-448-11	s	RES, CHIP NETWORK 22
RB370	1-233-448-11	s	RES, CHIP NETWORK 22
RB371	1-233-448-11	s	RES, CHIP NETWORK 22
RB372	1-233-448-11	s	RES, CHIP NETWORK 22
RB373	1-233-448-11	s	RES, CHIP NETWORK 22
RB374	1-233-448-11	s	RES, CHIP NETWORK 22
RB375	1-233-448-11	s	RES, CHIP NETWORK 22
RB376	1-233-448-11	s	RES, CHIP NETWORK 22
RB377	1-233-448-11	s	RES, CHIP NETWORK 22
RB378	1-233-448-11	s	RES, CHIP NETWORK 22
RB379	1-233-448-11	s	RES, CHIP NETWORK 22
RB400	1-233-448-11	s	RES, CHIP NETWORK 22
RB401	1-233-448-11	s	RES, CHIP NETWORK 22
RB402	1-233-448-11	s	RES, CHIP NETWORK 22
RB403	1-233-448-11	s	RES, CHIP NETWORK 22
RB404	1-233-448-11	s	RES, CHIP NETWORK 22
RB405	1-233-448-11	s	RES, CHIP NETWORK 22
RB406	1-233-448-11	s	RES, CHIP NETWORK 22
RB407	1-233-448-11	s	RES, CHIP NETWORK 22
RB408	1-233-448-11	s	RES, CHIP NETWORK 22
RB409	1-233-448-11	s	RES, CHIP NETWORK 22
RB410	1-233-448-11	s	RES, CHIP NETWORK 22
RB411	1-233-448-11	s	RES, CHIP NETWORK 22
RB412	1-233-448-11	s	RES, CHIP NETWORK 22
RB413	1-233-448-11	s	RES, CHIP NETWORK 22
RB414	1-233-448-11	s	RES, CHIP NETWORK 22
RB415	1-233-448-11	s	RES, CHIP NETWORK 22
RB416	1-233-448-11	s	RES, CHIP NETWORK 22
RB417	1-233-448-11	s	RES, CHIP NETWORK 22
RB418	1-233-448-11	s	RES, CHIP NETWORK 22
RB419	1-233-448-11	s	RES, CHIP NETWORK 22
RB420	1-233-448-11	s	RES, CHIP NETWORK 22

(DI-21 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB421	1-233-448-11	s	RES, CHIP NETWORK 22
RB422	1-233-448-11	s	RES, CHIP NETWORK 22
RB423	1-233-448-11	s	RES, CHIP NETWORK 22

DI-37 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8322-472-A	o	MOUNTED CIRCUIT BOARD, DI-37 (for HDS-7000/HDS-7150)
1pc	A-8322-428-A	o	MOUNTED CIRCUIT BOARD, DI-37A (for HDS-7100)
45pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
2pcs	3-194-878-01	s	LEVER, PC BOARD
8pcs	3-683-631-01	o	CLAMP
14pcs	4-886-821-11	s	SCREW,M3X6 CASE (SILVER)
10pcs	7-621-773-87	s	SCREW +B2.6X10(EP-FE/CU,NI,CR)
2pcs	7-622-207-05	s	NUT M2.6 TYPE2
2pcs	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
45pcs	7-682-547-04	s	SCREW +B3X6
1pc	1-783-425-11	o	CABLE ASSY, COAXIAL
1pc	1-783-426-11	o	CABLE ASSY, COAXIAL
1pc	1-783-427-11	o	CABLE ASSY, COAXIAL
1pc	1-783-428-11	o	CABLE ASSY, COAXIAL
1pc	1-783-429-11	o	CABLE ASSY, COAXIAL
1pc	1-783-430-11	o	CABLE ASSY, COAXIAL
1pc	1-783-431-11	o	CABLE ASSY, COAXIAL
1pc	1-783-432-11	o	CABLE ASSY, COAXIAL
1pc	1-783-433-11	o	CABLE ASSY, COAXIAL
1pc	1-783-434-11	o	CABLE ASSY, COAXIAL
1pc	1-783-435-11	o	CABLE ASSY, COAXIAL
1pc	1-783-436-11	o	CABLE ASSY, COAXIAL
1pc	1-783-437-11	o	CABLE ASSY, COAXIAL
1pc	1-783-438-11	o	CABLE ASSY, COAXIAL
1pc	1-783-439-11	o	CABLE ASSY, COAXIAL
C1	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C2	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C3	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C4	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C5	1-128-401-11	s	CAPACITOR,ELECT100MF/25V(CHIP)
C6	1-117-373-11	s	CAPACITOR, (SMD) 150MF/6.3V
C7	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C8	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C9	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C10	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C11	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C12	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C13	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C14	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
C15	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C16	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C17	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C18	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C19	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C20	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C21	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C22	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
C23	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C24	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
C25	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C26	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C27	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C28	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C29	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C32	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C33	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C35	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C36	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C37	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C38	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C39	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C41	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C43	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C44	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C45	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C46	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C47	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C48	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C49	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C50	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C51	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C52	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C53	1-164-182-11	s	CAPACITOR, CERAMIC 3300PF/100V
C54	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C55	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-164-182-11	s	CAPACITOR, CERAMIC 3300PF/100V
C57	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C58	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C59	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C62	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C63	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C64	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C65	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C66	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C67	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C68	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C69	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C73	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C74	1-164-182-11	s	CAPACITOR, CERAMIC 3300PF/100V
C75	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C76	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C77	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C78	1-164-182-11	s	CAPACITOR, CERAMIC 3300PF/100V
C79	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C80	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C81	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C82	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C83	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C84	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C85	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C86	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C87	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C88	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C89	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C90	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C91	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C92	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C93	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C94	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C95	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C96	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C97	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C98	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C99	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C100	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C107	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C120	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C121	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C130	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C134	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C137	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C138	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C139	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C140	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C141	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C142	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C143	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C144	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C145	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C146	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C147	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C148	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C149	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C150	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C152	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C153	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C154	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C155	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C157	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C158	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C159	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C160	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C161	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C162	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C163	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C164	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C165	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C166	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C167	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C168	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C169	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C170	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C171	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C172	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C173	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C174	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C175	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C176	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C178	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C179	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C180	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C181	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C182	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C183	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C184	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C185	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C186	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C187	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C188	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C189	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C190	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C191	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C192	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C193	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C194	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C195	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C196	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C197	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C198	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C204	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C205	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C206	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C207	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C212	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C213	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C214	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C215	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C216	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C217	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C220	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C221	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C222	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C223	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C224	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C225	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C226	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C227	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C228	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C229	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C230	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C231	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C232	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C233	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C234	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C235	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C236	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C237	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C238	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C239	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C240	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C241	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C242	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C243	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C244	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C245	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C246	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C247	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C248	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C249	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C250	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C251	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C252	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C254	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C255	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C256	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C257	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C258	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C259	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C260	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C261	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C262	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C263	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C264	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C265	1-117-373-11	s	CAPACITOR, (SMD) 150MF/6.3V
C266	1-117-373-11	s	CAPACITOR, (SMD) 150MF/6.3V
C267	1-117-373-11	s	CAPACITOR, (SMD) 150MF/6.3V
C268	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C269	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C270	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C271	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C272	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C273	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C274	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C275	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C276	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C277	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C278	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C279	1-125-783-11	s	CAPACITOR,ELECT 820MF 4V
C280	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C281	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C282	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C283	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C284	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C285	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C286	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C287	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C288	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C289	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C290	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C291	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C292	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C293	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C294	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C295	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C296	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C297	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C298	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C299	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C300	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C302	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C304	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C305	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C306	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C307	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C308	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C309	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C310	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C311	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C312	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C313	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C314	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C315	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C316	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C317	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C318	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C319	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C320	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C321	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C322	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C323	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C324	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C325	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C326	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C327	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C328	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C329	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C330	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C331	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C332	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C333	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C334	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C335	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C336	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C337	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C338	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C339	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C340	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C341	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C342	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C343	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C344	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C345	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C346	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C347	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C348	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C349	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C350	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C351	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C352	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C353	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C354	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C355	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C356	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C357	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C358	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C359	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C360	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C361	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C362	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C363	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C364	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C365	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C366	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C367	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C368	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C369	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C370	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C371	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C372	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C373	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C374	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C375	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C376	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C377	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C378	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C379	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C380	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C381	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C382	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C383	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C384	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C385	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C386	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C387	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C388	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C389	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C390	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C391	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C392	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C393	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C394	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C395	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C396	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C397	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C398	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C399	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C400	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C401	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C402	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C403	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C404	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C405	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C406	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C407	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C408	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C409	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C410	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C411	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C412	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C413	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C414	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C415	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C416	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C417	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C418	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C419	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C420	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C421	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C422	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C423	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C424	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C425	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C426	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C427	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C428	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C429	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C430	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C431	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C432	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C433	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C434	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C435	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C436	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C437	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C438	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C439	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C440	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C441	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C442	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C443	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C444	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C445	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C446	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C447	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C448	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C449	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C450	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C451	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C452	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C453	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C454	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C455	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C456	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C457	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C458	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C459	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C460	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C461	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C462	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C463	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C464	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C465	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C466	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C467	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C468	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C469	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C470	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C471	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C472	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C473	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C474	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C475	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C476	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C477	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C478	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C479	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C480	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C481	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C482	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C483	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C484	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C485	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C486	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C487	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C488	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C489	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C490	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C491	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C492	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C493	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C494	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C495	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C496	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C497	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C498	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C499	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C500	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C501	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C502	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C503	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C504	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C505	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C506	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C507	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C508	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C509	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C510	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C511	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C512	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C513	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C514	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C515	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C516	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C517	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C518	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C519	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C520	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C521	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C522	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C523	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C524	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C525	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C526	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C527	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C528	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C529	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C530	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C531	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C532	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C533	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C534	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C535	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C536	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C537	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C538	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C539	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C540	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C541	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C542	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C543	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C544	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C545	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C546	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C547	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C548	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C549	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C550	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C551	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C552	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C553	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C554	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C555	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C556	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C557	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C558	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C559	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C560	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C561	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C562	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C563	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C564	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C565	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C566	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C567	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C568	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C569	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C570	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C571	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C572	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C573	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C574	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C575	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C576	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C577	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C578	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C579	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C580	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C581	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C582	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C583	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C584	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C585	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C586	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C587	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C588	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C589	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C590	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C591	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C592	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C593	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C594	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C595	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C596	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C597	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C598	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C599	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C600	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C601	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C602	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C603	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C604	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C605	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C606	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C607	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C608	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C609	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C610	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C611	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C612	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C613	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C614	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C615	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C616	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C617	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C618	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C619	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C620	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C621	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C622	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C623	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C624	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C625	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C626	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C627	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C628	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C629	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C630	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C631	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C632	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C633	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C634	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C635	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C636	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C637	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C638	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C639	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C640	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C641	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C642	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C643	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C644	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C645	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C646	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C647	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C648	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C649	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C650	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C651	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C652	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C653	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C654	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C655	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C656	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C657	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C658	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C659	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C660	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C661	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C662	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C663	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C664	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C665	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C666	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C667	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C668	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C669	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C670	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C671	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C672	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C673	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C674	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C675	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C676	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C677	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C678	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C679	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C680	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C681	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C682	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C683	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C684	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C685	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C686	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C687	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C688	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C689	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C690	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C691	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C692	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C693	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C694	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C695	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C696	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C697	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C698	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C699	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C700	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C701	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C702	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C703	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C704	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C705	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C706	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C707	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C708	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C709	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C710	1-164-182-11	s	CAPACITOR, CERAMIC 3300PF/100V
C711	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C712	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C713	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C714	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C715	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C716	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C717	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C718	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C719	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C720	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C721	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C722	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C723	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C724	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C725	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C726	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C727	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C728	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C729	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C730	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C731	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C732	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C733	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C734	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C735	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C736	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C737	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C738	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C739	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C750	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C751	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C752	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C753	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C754	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C755	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C756	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C757	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C758	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C759	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C760	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C761	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C762	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C763	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C764	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C765	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C766	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C767	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C768	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C769	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C770	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C771	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C772	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C773	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C774	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C775	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C776	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C777	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C778	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C779	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C780	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C781	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C782	1-107-884-11	s	CAPACITOR,ELECT 1000MF/16V
C785	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C786	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C787	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C788	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C789	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C790	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C791	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C792	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C793	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C794	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C795	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C796	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C797	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C798	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C799	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C800	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C801	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C802	1-164-159-21	s	CAPACITOR,CERAMIC 0.1MF(S-)
CN2	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN3	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN4	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN5	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN6	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN7	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN8	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN9	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN10	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN11	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN12	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN13	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN14	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN15	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P
CN16	1-779-393-11	o	CONNECTOR, BOARD TO BOARD 100P

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1	8-719-975-84	s	LED AY1101W
D2	8-719-975-84	s	LED AY1101W
D3	8-719-975-84	s	LED AY1101W
D4	8-719-975-84	s	LED AY1101W
D5	8-719-048-17	s	DIODE MBRS130LT3
D6	8-719-048-17	s	DIODE MBRS130LT3
D7	8-719-048-17	s	DIODE MBRS130LT3
D8	8-719-048-17	s	DIODE MBRS130LT3
D9	8-719-048-17	s	DIODE MBRS130LT3
D10	8-719-048-17	s	DIODE MBRS130LT3
D11	8-719-048-17	s	DIODE MBRS130LT3
D12	8-719-048-17	s	DIODE MBRS130LT3
D20	8-719-951-19	s	DIODE VR1101W-TR
D21	8-719-951-19	s	DIODE VR1101W-TR
D22	8-719-951-19	s	DIODE VR1101W-TR
D23	8-719-951-19	s	DIODE VR1101W-TR
D24	8-719-951-19	s	DIODE VR1101W-TR
D25	8-719-951-19	s	DIODE VR1101W-TR
D26	8-719-951-19	s	DIODE VR1101W-TR
D27	8-719-951-19	s	DIODE VR1101W-TR
D28	8-719-951-19	s	DIODE VR1101W-TR
D29	8-719-951-19	s	DIODE VR1101W-TR
D30	8-719-951-19	s	DIODE VR1101W-TR
D31	8-719-951-19	s	DIODE VR1101W-TR
D32	8-719-951-19	s	DIODE VR1101W-TR
D33	8-719-951-19	s	DIODE VR1101W-TR
D34	8-719-951-19	s	DIODE VR1101W-TR
D35	8-719-975-84	s	LED AY1101W
D36	8-719-048-17	s	DIODE MBRS130LT3
D37	8-719-048-17	s	DIODE MBRS130LT3
F1	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F2	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F3	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F4	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F5	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F6	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F7	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F8	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F10	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F11	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F12	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
FB1	1-500-425-11	s	BEAD, FERRITE
FB2	1-500-425-11	s	BEAD, FERRITE
IC3	8-759-466-60	s	IC LTC1266CS-E2
IC4	8-759-466-60	s	IC LTC1266CS-E2
IC9	8-759-466-60	s	IC LTC1266CS-E2
IC10	8-759-466-60	s	IC LTC1266CS-E2
IC13	8-759-523-51	s	IC TC74ACT574FT(EL)
IC14	8-759-465-49	s	IC MC10ELT21DR2
IC15	8-759-466-59	s	IC CGS2535TVX
IC16	8-759-466-59	s	IC CGS2535TVX
IC17	8-759-386-27	s	IC 74LCX04MTCX
IC18	8-759-830-39	s	IC PI74FCT16374ETA
IC19	8-759-466-21	s	IC S4405B-80
IC20	8-759-464-46	s	IC CXD8899J
IC21	8-759-464-46	s	IC CXD8899J
IC22	8-759-464-48	s	IC CXD8900J
IC23	8-759-464-46	s	IC CXD8899J

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC24	8-759-386-27	s	IC 74LCX04MTCX
IC25	8-759-464-46	s	IC CXD8899J
IC26	8-759-464-48	s	IC CXD8900J
IC27	8-759-271-78	s	IC DS26C32ATM
IC28	8-759-271-82	s	IC DS3695ATM
IC29	8-759-464-48	s	IC CXD8900J
IC30	8-759-464-48	s	IC CXD8900J
IC31	8-759-464-48	s	IC CXD8900J
IC32	8-759-464-46	s	IC CXD8899J
IC33	8-759-464-46	s	IC CXD8899J
IC34	8-759-464-48	s	IC CXD8900J
IC36	8-759-469-98	s	IC CAT93C66K-LE10
IC37	8-759-386-27	s	IC 74LCX04MTCX
IC38	8-759-505-00	s	IC CXD8052Q
IC39	8-759-656-62	o	IC EPM7064-RXINIT-V2
IC40	8-759-464-48	s	IC CXD8900J
IC41	8-759-464-48	s	IC CXD8900J
IC42	8-759-464-48	s	IC CXD8900J
IC43	8-759-464-48	s	IC CXD8900J
IC44	8-759-464-48	s	IC CXD8900J
IC45	8-759-464-48	s	IC CXD8900J
IC46	8-759-464-48	s	IC CXD8900J
IC47	8-759-464-48	s	IC CXD8900J
IC48	8-759-464-48	s	IC CXD8900J
IC49	8-759-464-48	s	IC CXD8900J
IC50	8-759-464-48	s	IC CXD8900J
IC51	8-759-464-48	s	IC CXD8900J
IC52	8-759-464-46	s	IC CXD8899J
IC53	8-759-464-46	s	IC CXD8899J
IC54	8-759-464-46	s	IC CXD8899J
IC55	8-759-464-46	s	IC CXD8899J
IC56	8-759-464-46	s	IC CXD8899J
IC57	8-759-464-46	s	IC CXD8899J
IC58	8-759-464-46	s	IC CXD8899J
IC59	8-759-464-46	s	IC CXD8899J
IC60	8-759-464-46	s	IC CXD8899J
IC61	8-759-464-46	s	IC CXD8899J
IC62	8-759-464-46	s	IC CXD8899J
IC63	8-759-464-46	s	IC CXD8899J
IC64	8-759-386-27	s	IC 74LCX04MTCX
IC65	8-759-386-27	s	IC 74LCX04MTCX
IC66	8-759-386-27	s	IC 74LCX04MTCX
IC67	8-759-386-27	s	IC 74LCX04MTCX
IC68	8-759-386-27	s	IC 74LCX04MTCX
IC69	8-759-386-27	s	IC 74LCX04MTCX
IC70	8-759-186-55	s	IC TC74VHC165F
IC71	8-759-523-45	s	IC TC74ACT244FT(EL)
IC72	8-759-456-26	s	IC 74LCX541MTCX
IC73	8-759-456-26	s	IC 74LCX541MTCX
IC74	8-759-456-26	s	IC 74LCX541MTCX
IC75	8-759-456-26	s	IC 74LCX541MTCX
IC76	8-759-456-26	s	IC 74LCX541MTCX
IC77	8-759-186-55	s	IC TC74VHC165F
IC78	8-759-386-27	s	IC 74LCX04MTCX
IC79	8-759-464-48	s	IC CXD8900J
IC80	8-759-464-48	s	IC CXD8900J
IC81	8-759-464-48	s	IC CXD8900J
IC82	8-759-464-48	s	IC CXD8900J
IC83	8-759-464-48	s	IC CXD8900J

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC84	8-759-464-48	s	IC CXD8900J
IC85	8-759-464-48	s	IC CXD8900J
IC86	8-759-464-48	s	IC CXD8900J
IC87	8-759-464-48	s	IC CXD8900J
IC88	8-759-464-48	s	IC CXD8900J
IC89	8-759-464-48	s	IC CXD8900J
IC90	8-759-464-48	s	IC CXD8900J
IC91	8-759-464-46	s	IC CXD8899J
IC92	8-759-464-46	s	IC CXD8899J
IC93	8-759-464-46	s	IC CXD8899J
IC94	8-759-464-46	s	IC CXD8899J
IC95	8-759-464-46	s	IC CXD8899J
IC96	8-759-464-46	s	IC CXD8899J
IC97	8-759-464-46	s	IC CXD8899J
IC98	8-759-464-46	s	IC CXD8899J
IC99	8-759-464-46	s	IC CXD8899J
IC100	8-759-464-46	s	IC CXD8899J
IC101	8-759-464-46	s	IC CXD8899J
IC102	8-759-464-46	s	IC CXD8899J
IC103	8-759-386-27	s	IC 74LCX04MTCX
IC104	8-759-386-27	s	IC 74LCX04MTCX
IC105	8-759-386-27	s	IC 74LCX04MTCX
IC106	8-759-386-27	s	IC 74LCX04MTCX
IC107	8-759-386-27	s	IC 74LCX04MTCX
IC108	8-759-386-27	s	IC 74LCX04MTCX
IC200	8-759-985-50	s	IC 74AC240SJ
IC201	8-759-389-48	s	IC 74LCX16374MTDX
IC202	8-759-523-49	s	IC TC74ACT541FT(EL)
IC203	8-759-389-48	s	IC 74LCX16374MTDX
IC204	8-759-523-49	s	IC TC74ACT541FT(EL)
IC205	8-759-466-60	s	IC LTC1266CS-E2
IC206	8-759-466-59	s	IC CGS2535TVX
IC207	8-759-389-48	s	IC 74LCX16374MTDX
IC208	8-759-466-59	s	IC CGS2535TVX
IC209	8-759-389-48	s	IC 74LCX16374MTDX
IC210	8-759-389-48	s	IC 74LCX16374MTDX
IC211	8-759-389-48	s	IC 74LCX16374MTDX
IC212	8-759-389-48	s	IC 74LCX16374MTDX
IC213	8-759-389-48	s	IC 74LCX16374MTDX
IC214	8-759-466-59	s	IC CGS2535TVX
IC215	8-759-389-48	s	IC 74LCX16374MTDX
IC216	8-759-389-48	s	IC 74LCX16374MTDX
IC217	8-759-389-48	s	IC 74LCX16374MTDX
IC218	8-759-389-48	s	IC 74LCX16374MTDX
IC219	8-759-389-48	s	IC 74LCX16374MTDX
IC220	8-759-389-48	s	IC 74LCX16374MTDX
IC221	8-759-389-48	s	IC 74LCX16374MTDX
IC222	8-759-466-59	s	IC CGS2535TVX
IC223	8-759-468-08	s	IC 74LVX3L384QSCX
IC224	8-759-468-08	s	IC 74LVX3L384QSCX
IC225	8-759-389-48	s	IC 74LCX16374MTDX
IC226	8-759-389-48	s	IC 74LCX16374MTDX
IC227	8-759-389-48	s	IC 74LCX16374MTDX
IC228	8-759-389-48	s	IC 74LCX16374MTDX
IC229	8-759-389-48	s	IC 74LCX16374MTDX
IC230	8-759-389-48	s	IC 74LCX16374MTDX
IC231	8-759-389-48	s	IC 74LCX16374MTDX
IC232	8-759-389-48	s	IC 74LCX16374MTDX
IC233	8-759-389-48	s	IC 74LCX16374MTDX

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC234	8-759-456-26	s	IC 74LCX541MTCX
IC235	8-759-389-48	s	IC 74LCX16374MTDX
IC236	8-759-389-48	s	IC 74LCX16374MTDX
IC237	8-759-523-49	s	IC TC74ACT541FT(EL)
IC238	8-759-523-49	s	IC TC74ACT541FT(EL)
IC239	8-759-389-48	s	IC 74LCX16374MTDX
IC240	8-759-456-26	s	IC 74LCX541MTCX
IC241	8-759-523-49	s	IC TC74ACT541FT(EL)
IC242	8-759-523-49	s	IC TC74ACT541FT(EL)
IC243	8-759-389-48	s	IC 74LCX16374MTDX
IC244	8-759-389-48	s	IC 74LCX16374MTDX
IC245	8-759-389-48	s	IC 74LCX16374MTDX
IC246	8-759-389-48	s	IC 74LCX16374MTDX
IC247	8-759-523-49	s	IC TC74ACT541FT(EL)
IC248	8-759-523-36	s	IC TC74ACT04FT(EL)
IC249	8-759-523-49	s	IC TC74ACT541FT(EL)
IC250	8-759-523-49	s	IC TC74ACT541FT(EL)
IC251	8-759-186-55	s	IC TC74VHC165F
IC252	8-759-186-55	s	IC TC74VHC165F
IC253	8-759-523-49	s	IC TC74ACT541FT(EL)
IC254	8-759-523-49	s	IC TC74ACT541FT(EL)
IC255	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC256	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC257	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC258	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC259	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC260	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC261	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC262	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC263	8-759-386-27	s	IC 74LCX04MTCX
IC264	8-759-386-27	s	IC 74LCX04MTCX
IC265	8-759-386-27	s	IC 74LCX04MTCX
IC300	8-759-389-45	s	IC 74LCX16244MTDX
IC301	8-759-389-45	s	IC 74LCX16244MTDX
IC302	8-759-389-45	s	IC 74LCX16244MTDX
IC303	8-759-389-45	s	IC 74LCX16244MTDX
IC304	8-759-389-45	s	IC 74LCX16244MTDX
IC305	8-759-389-45	s	IC 74LCX16244MTDX
IS39	1-251-731-11	o	SOCKET, IC 68P
L5	1-469-060-11	s	INDUCTOR
L6	1-469-060-11	s	INDUCTOR
L7	1-469-060-11	s	INDUCTOR
L8	1-469-060-11	s	INDUCTOR
L15	1-469-060-11	s	INDUCTOR
Q1	8-729-025-01	s	TRANSISTOR SI9410DY
Q2	8-729-025-01	s	TRANSISTOR SI9410DY
Q3	8-729-025-01	s	TRANSISTOR SI9410DY
Q4	8-729-025-01	s	TRANSISTOR SI9410DY
Q5	8-729-025-01	s	TRANSISTOR SI9410DY
Q6	8-729-025-01	s	TRANSISTOR SI9410DY
Q7	8-729-025-01	s	TRANSISTOR SI9410DY
Q8	8-729-025-01	s	TRANSISTOR SI9410DY
Q9	8-729-025-01	s	TRANSISTOR SI9410DY
Q10	8-729-025-01	s	TRANSISTOR SI9410DY
R1	1-219-610-11	s	RESISTOR, (SQUARE TYPE) 0.022
R2	1-219-610-11	s	RESISTOR, (SQUARE TYPE) 0.022
R3	1-219-610-11	s	RESISTOR, (SQUARE TYPE) 0.022
R4	1-219-610-11	s	RESISTOR, (SQUARE TYPE) 0.022

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R6	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R7	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R9	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R10	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R47	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R50	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R51	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R64	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R65	1-218-756-11	s	RESISTOR,CHIP 150K 1/10W(2012)
R66	1-216-690-11	s	RESISTOR,CHIP 43K 1/10W(2012)
R67	1-216-686-11	s	RESISTOR,CHIP 30K 1/10W
R74	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R76	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R78	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R79	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R86	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R97	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R108	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R109	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R116	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R117	1-218-756-11	s	RESISTOR,CHIP 150K 1/10W(2012)
R118	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R119	1-218-756-11	s	RESISTOR,CHIP 150K 1/10W(2012)
R126	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R127	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R138	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R149	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R160	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R171	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R182	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R193	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R204	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R215	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R226	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R237	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R248	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R259	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R278	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R289	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R300	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R311	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R322	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R333	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R344	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R355	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R366	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R377	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R388	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R399	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R400	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R401	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R402	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R403	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R502	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R505	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R507	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R508	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R510	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R512	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R513	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R514	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R517	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R519	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R520	1-219-610-11	s	RESISTOR, (SQUARE TYPE) 0.022
R521	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R522	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R523	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R524	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R525	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R526	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R527	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R528	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R529	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R531	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R533	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R534	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R537	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R541	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R542	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R543	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R544	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R545	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R546	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R549	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R550	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R551	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R552	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R553	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R554	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R555	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R556	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R557	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R558	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R559	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R560	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R562	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R563	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R564	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R566	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R567	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R570	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R573	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R574	1-216-688-11	s	RESISTOR,CHIP 36K 1/10W(2012)
R575	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R576	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R577	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R578	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R579	1-216-688-11	s	RESISTOR,CHIP 36K 1/10W(2012)
R580	1-216-688-11	s	RESISTOR,CHIP 36K 1/10W(2012)
R582	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R584	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R585	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R586	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R587	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R588	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R589	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R590	1-216-295-91	s	CONDUCTOR, CHIP (2012)

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R591	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R592	1-216-688-11	s	RESISTOR,CHIP 36K 1/10W(2012)
R593	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R594	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R595	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R596	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R597	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R598	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R599	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R600	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R601	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R602	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R603	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R604	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R606	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R609	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R610	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R611	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R612	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R613	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R614	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R615	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R616	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R617	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R618	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R619	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R620	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R622	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R624	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R625	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R626	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R627	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R628	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R629	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R630	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R631	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R633	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R634	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R635	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R636	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R637	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R638	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R639	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R640	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R641	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R642	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R645	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R648	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R649	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R651	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R655	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R656	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R659	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R660	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R662	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R665	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R667	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R668	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R670	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R673	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R675	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R677	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R679	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R681	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R683	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R684	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R686	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R688	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R690	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R692	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R693	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R694	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R695	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R696	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R697	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R698	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R699	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R700	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R701	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R702	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R704	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R705	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R706	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R708	1-216-686-11	s	RESISTOR,CHIP 30K 1/10W
R709	1-216-690-11	s	RESISTOR,CHIP 43K 1/10W(2012)
R710	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R711	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R712	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R713	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R714	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R716	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R718	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R719	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R720	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R721	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R722	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R723	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R724	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R725	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R726	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R727	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R728	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R729	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R730	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R731	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R732	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R733	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R741	1-216-361-00	s	RESISTOR,METAL FILM 0.22/2W
RB1	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB2	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB3	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB4	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB5	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB6	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB7	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB8	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB9	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB10	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB11	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB12	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB13	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB14	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB15	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB16	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB17	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB18	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB19	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB20	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB21	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB22	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB23	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB24	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB25	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB26	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB27	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB28	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB29	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB30	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB31	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB32	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB33	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB34	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB35	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB36	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB37	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB38	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB39	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB40	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB41	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB42	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB43	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB44	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB45	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB46	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB47	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB48	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB49	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB50	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB51	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB52	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB53	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB54	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB55	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB56	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB57	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB58	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB59	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB60	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB61	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB62	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB63	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB64	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB65	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB66	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB67	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB68	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB69	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB70	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB71	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB72	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB73	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB74	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB75	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB76	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB77	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB78	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB79	1-234-465-91	s	RESISTOR, CHIP NETWORK 0
RB80	1-234-465-91	s	RESISTOR, CHIP NETWORK 0
RB81	1-234-465-91	s	RESISTOR, CHIP NETWORK 0
RB82	1-234-465-91	s	RESISTOR, CHIP NETWORK 0
RB83	1-234-465-91	s	RESISTOR, CHIP NETWORK 0
RB84	1-234-465-91	s	RESISTOR, CHIP NETWORK 0
RB85	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB86	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB87	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB88	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB89	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB90	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB102	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB103	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB104	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB105	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB106	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB107	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB108	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB109	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB112	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB113	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB114	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB115	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB116	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB117	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB118	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB119	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB132	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB133	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB134	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB135	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB136	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB137	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB138	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB139	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB200	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB201	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB202	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB203	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB204	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB205	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB206	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB207	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB208	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB209	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB210	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB211	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB212	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB213	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB214	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB215	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB216	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB217	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB218	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB219	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB220	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB221	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB222	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB223	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB224	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB225	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB226	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB227	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB228	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB229	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB230	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB231	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB232	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB233	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB234	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB235	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB236	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB237	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB238	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB239	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB240	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB241	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB242	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB243	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB244	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB245	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB246	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB247	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB248	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB249	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB250	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB251	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB252	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB253	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB254	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB255	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB256	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB257	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB258	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB259	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB260	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB261	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB262	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB263	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB264	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB265	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB266	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB267	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB268	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB269	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB270	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB271	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB272	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB273	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB274	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB275	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB276	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB277	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB278	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB279	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB280	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB281	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB282	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB283	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB284	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB285	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB286	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB287	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB288	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB289	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB290	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB291	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB292	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB293	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB294	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB295	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB296	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB297	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB298	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB299	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB300	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB301	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB302	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB303	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB304	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB305	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB306	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB307	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB308	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB309	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB310	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB311	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB312	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB313	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB314	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB315	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB316	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB317	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB318	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB319	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB320	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB321	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB322	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB323	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB324	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB325	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB326	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB327	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB328	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB329	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB330	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB331	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB332	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB333	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB334	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB335	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB336	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB337	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB338	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB339	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB340	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB341	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB342	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB343	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB344	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB345	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB346	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB347	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB348	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB349	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB350	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB351	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB352	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB353	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB354	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB355	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB356	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB357	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB358	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB359	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB360	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB361	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB362	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB363	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB364	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB365	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB366	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB367	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB368	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB369	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB370	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB371	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB372	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB373	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB374	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB375	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB376	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB377	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB378	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB379	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB400	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB401	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB402	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB403	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB404	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB405	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB406	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB407	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB408	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB409	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB410	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(DI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB411	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB412	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB413	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB414	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB415	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB416	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB417	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB418	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB419	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB420	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB421	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB422	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB423	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

DU-79 BOARD (For 24P System)

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C6	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C8	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C9	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C10	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C11	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C12	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C13	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C14	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C15	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C16	1-163-023-00	s	CAPACITOR,CHIP CERAMIC 0.015MF
C17	1-163-023-00	s	CAPACITOR,CHIP CERAMIC 0.015MF
C18	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C19	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C20	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C22	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C23	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C24	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C25	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C26	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C27	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C28	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C29	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-113-00	s	CAPACITOR,CHIP CERAMIC 68PF/50
C32	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C33	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-163-113-00	s	CAPACITOR,CHIP CERAMIC 68PF/50
C35	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C36	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C37	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C38	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C39	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C41	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
D1	8-719-987-09	s	LED PG1102W
D2	8-719-987-09	s	LED PG1102W
D3	8-719-977-96	s	DIODE DTZ-TT11-2.7
IC1	8-759-245-00	s	IC TD62306F
IC2	8-759-465-49	s	IC MC10ELT21DR2
IC3	8-759-367-25	s	IC MC10EL16DR2
IC4	8-759-466-59	s	IC CGS2535TVX
IC5	8-759-700-78	s	IC NJM082M
IC6	8-759-523-40	s	IC TC74ACT74FT(EL)
IC7	8-759-464-48	s	IC CXD8900J
IC8	8-759-464-48	s	IC CXD8900J
IC9	8-759-523-39	s	IC TC74ACT32FT(EL)
IC10	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC11	8-759-523-37	s	IC TC74ACT08FT(EL)
IC12	8-759-523-38	s	IC TC74ACT14FT(EL)

(DU-79 BOARD (For 24P System))

Ref. No. or Q'ty	Part No.	SP	Description
L1	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH
L2	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH
L3	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH
R1	1-216-639-11	s	RESISTOR,CHIP 330 1/10W (2012)
R2	1-216-639-11	s	RESISTOR,CHIP 330 1/10W (2012)
R3	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R4	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R5	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R6	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R7	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R8	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R9	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R10	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R11	1-216-643-11	s	RESISTOR CHIP 470 1/10W (2012)
R12	1-216-643-11	s	RESISTOR CHIP 470 1/10W (2012)
R13	1-216-658-11	s	RESISTOR,CHIP 2.0K 1/10W(2012)
R14	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R15	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R16	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R17	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R18	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R19	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R20	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R21	1-218-768-11	s	RESISTOR CHIP 470K 1/10W(2012)
R22	1-216-686-11	s	RESISTOR, METAL FILM 30K 1/10W
R23	1-216-691-11	s	RESISTOR CHIP 47K 1/10W(2012)
R24	1-216-691-11	s	RESISTOR CHIP 47K 1/10W(2012)
R25	1-216-679-11	s	RESISTOR CHIP 15K 1/10W (2012)
R26	1-216-679-11	s	RESISTOR CHIP 15K 1/10W (2012)
R27	1-216-686-11	s	RESISTOR, METAL FILM 30K 1/10W
R28	1-216-679-11	s	RESISTOR CHIP 15K 1/10W (2012)
R29	1-216-679-11	s	RESISTOR CHIP 15K 1/10W (2012)
R30	1-216-691-11	s	RESISTOR CHIP 47K 1/10W(2012)
R31	1-216-667-11	s	RESISTOR,CHIP 4.7K 1/10W(2012)
R32	1-216-667-11	s	RESISTOR,CHIP 4.7K 1/10W(2012)
R100	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
RY1	1-515-716-11	s	RELAY
VCX1	1-767-328-11	s	OSCILLATOR, CRYSTAL
VCX2	1-767-329-11	s	OSCILLATOR, CRYSTAL

EC-55 BOARD (HKDS-7690A)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	9-885-019-90	s	PRINTED WIRING BOARD, EC-55A/90

IF-656 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-514-A	o	MOUNTED CIRCUIT BOARD, IF-656
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C4	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C5	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C6	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C7	1-163-038-00	s	CERAMIC 0.1uF 25V
C8	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C9	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C16	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C17	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C18	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C19	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C20	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C25	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C26	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C27	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C30	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C36	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C37	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C38	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C41	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C43	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C48	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C51	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C52	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C53	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C54	1-163-038-00	s	CERAMIC 0.1uF 25V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V

(IF-656 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C58	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C59	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C63	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C75	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C80	1-163-038-00	s	CERAMIC 0.1uF 25V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
CN1	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
IC1	8-759-555-91	s	IC HD647180FS-SIO-V1.1
IC2	8-759-523-42	s	IC TC74ACT139FT(EL)
IC3	8-759-555-91	s	IC HD647180FS-SIO-V1.1
IC4	8-759-523-36	s	IC TC74ACT04FT(EL)
IC5	8-759-555-91	s	IC HD647180FS-SIO-V1.1
IC6	8-759-523-42	s	IC TC74ACT139FT(EL)
IC7	8-759-555-91	s	IC HD647180FS-SIO-V1.1
IC8	8-759-523-42	s	IC TC74ACT139FT(EL)
IC9	8-759-555-91	s	IC HD647180FS-SIO-V1.1
IC10	8-759-523-36	s	IC TC74ACT04FT(EL)
IC11	8-759-555-91	s	IC HD647180FS-SIO-V1.1
IC12	8-759-926-30	s	IC AM26LS30PC
IC13	8-759-469-77	s	IC CY7C136-55NC
IC14	8-759-904-77	s	IC AM26LS32ACN
IC15	8-759-469-77	s	IC CY7C136-55NC
IC16	8-759-926-30	s	IC AM26LS30PC
IC17	8-759-926-30	s	IC AM26LS30PC
IC18	8-759-469-77	s	IC CY7C136-55NC
IC19	8-759-904-77	s	IC AM26LS32ACN
IC20	8-759-926-30	s	IC AM26LS30PC
IC21	8-759-469-77	s	IC CY7C136-55NC
IC22	8-759-904-77	s	IC AM26LS32ACN
IC23	8-759-469-77	s	IC CY7C136-55NC
IC24	8-759-926-30	s	IC AM26LS30PC
IC25	8-759-926-30	s	IC AM26LS30PC
IC26	8-759-469-77	s	IC CY7C136-55NC
R1	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R2	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R3	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R4	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R5	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W

(IF-656 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R6	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R7	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R8	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R9	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R10	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R11	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R12	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R13	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R14	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R15	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R16	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R17	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R18	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R19	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R20	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R21	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R22	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R23	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R24	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R25	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R26	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R27	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R28	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R29	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R30	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R31	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R32	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R33	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R34	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R35	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R36	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R37	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R38	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R39	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
X1	1-567-812-11	s	RESONATOR, CERAMIC 12.288MHz
X2	1-567-812-11	s	RESONATOR, CERAMIC 12.288MHz
X3	1-567-812-11	s	RESONATOR, CERAMIC 12.288MHz
X4	1-567-812-11	s	RESONATOR, CERAMIC 12.288MHz
X5	1-567-812-11	s	RESONATOR, CERAMIC 12.288MHz
X6	1-567-812-11	s	RESONATOR, CERAMIC 12.288MHz

KPC-3 BOARD

---

*a:[Lot No. 710 - 805]
*b:[Lot No. 806 - 151]
*c:[Lot No. 082 -]
*d:[Lot No. 710 - 0B3]
*e:[Lot No. 710 - 801]
*f:[Lot No. 802 -]
*g:[Lot No. 151 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-489-A	o	MOUNTED CIRCUIT BOARD, KPC-3
10pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
6pcs *a	7-622-205-05	s	NUT, M2 TYPE2
2pcs	7-622-207-05	s	N 2.6, TYPE 2
6pcs *f	7-685-104-21	s	SCREW +P 2x6 TYPE2 SLIT
*e	7-621-772-48	s	SCREW +B 2x8
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C3	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-038-00	s	CERAMIC 0.1uF 25V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7	1-163-038-00	s	CERAMIC 0.1uF 25V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C11	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C12	1-117-372-11	s	TANTALUM 100uF 20% 10V
C13	1-117-372-11	s	TANTALUM 100uF 20% 10V
C14	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-163-038-00	s	CERAMIC 0.1uF 25V
C25	1-163-038-00	s	CERAMIC 0.1uF 25V
C26	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C27	1-163-038-00	s	CERAMIC 0.1uF 25V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C38	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C43	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-038-00	s	CERAMIC 0.1uF 25V
C48	1-163-038-00	s	CERAMIC 0.1uF 25V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-038-00	s	CERAMIC 0.1uF 25V
C53	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C54	1-163-038-00	s	CERAMIC 0.1uF 25V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C67	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C68	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C71	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C72	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C75	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C80	1-163-038-00	s	CERAMIC 0.1uF 25V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-038-00	s	CERAMIC 0.1uF 25V
C85	1-163-038-00	s	CERAMIC 0.1uF 25V
C86	1-163-038-00	s	CERAMIC 0.1uF 25V
C87	1-163-038-00	s	CERAMIC 0.1uF 25V
C88	1-163-038-00	s	CERAMIC 0.1uF 25V
C89	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-038-00	s	CERAMIC 0.1uF 25V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-163-038-00	s	CERAMIC 0.1uF 25V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C104	1-163-038-00	s	CERAMIC 0.1uF 25V
C105	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C106	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C107	1-163-038-00	s	CERAMIC 0.1uF 25V
C108	1-163-038-00	s	CERAMIC 0.1uF 25V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-163-038-00	s	CERAMIC 0.1uF 25V
C119	1-163-038-00	s	CERAMIC 0.1uF 25V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C130	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C131	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C132	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C133	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C137	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C138	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C159	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-038-00	s	CERAMIC 0.1uF 25V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C191	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-038-00	s	CERAMIC 0.1uF 25V
C215	1-163-038-00	s	CERAMIC 0.1uF 25V
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-038-00	s	CERAMIC 0.1uF 25V
C220	1-163-038-00	s	CERAMIC 0.1uF 25V
C221	1-163-038-00	s	CERAMIC 0.1uF 25V

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C222	1-163-038-00	s	CERAMIC 0.1uF 25V
C223	1-163-038-00	s	CERAMIC 0.1uF 25V
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-038-00	s	CERAMIC 0.1uF 25V
C226	1-163-038-00	s	CERAMIC 0.1uF 25V
C227	1-163-038-00	s	CERAMIC 0.1uF 25V
C228	1-163-038-00	s	CERAMIC 0.1uF 25V
C229	1-163-038-00	s	CERAMIC 0.1uF 25V
C230	1-163-038-00	s	CERAMIC 0.1uF 25V
C231	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C232	1-163-038-00	s	CERAMIC 0.1uF 25V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-038-00	s	CERAMIC 0.1uF 25V
C242	1-163-038-00	s	CERAMIC 0.1uF 25V
C243	1-126-396-11	s	ELECT, CHIP 47uF 20% 16V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-038-00	s	CERAMIC 0.1uF 25V
C250	1-163-038-00	s	CERAMIC 0.1uF 25V
C251	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C252	1-163-038-00	s	CERAMIC 0.1uF 25V
C253	1-163-038-00	s	CERAMIC 0.1uF 25V
C254	1-163-038-00	s	CERAMIC 0.1uF 25V
C255	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C256	1-163-038-00	s	CERAMIC 0.1uF 25V
C257	1-163-038-00	s	CERAMIC 0.1uF 25V
C258	1-163-038-00	s	CERAMIC 0.1uF 25V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C261	1-163-038-00	s	CERAMIC 0.1uF 25V
C262	1-163-038-00	s	CERAMIC 0.1uF 25V
C263	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C264	1-163-038-00	s	CERAMIC 0.1uF 25V
C265	1-163-038-00	s	CERAMIC 0.1uF 25V
C266	1-163-038-00	s	CERAMIC 0.1uF 25V
C267	1-163-038-00	s	CERAMIC 0.1uF 25V
C268	1-163-038-00	s	CERAMIC 0.1uF 25V
C269	1-163-038-00	s	CERAMIC 0.1uF 25V
C270	1-163-038-00	s	CERAMIC 0.1uF 25V
C271	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C272	1-163-038-00	s	CERAMIC 0.1uF 25V
C273	1-163-038-00	s	CERAMIC 0.1uF 25V
C274	1-163-038-00	s	CERAMIC 0.1uF 25V
C275	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-038-00	s	CERAMIC 0.1uF 25V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C279	1-163-038-00	s	CERAMIC 0.1uF 25V
C280	1-163-038-00	s	CERAMIC 0.1uF 25V

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C281	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C282	1-117-372-11	s	TANTALUM 100uF 20% 10V
C283	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-038-00	s	CERAMIC 0.1uF 25V
C292	1-163-038-00	s	CERAMIC 0.1uF 25V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-038-00	s	CERAMIC 0.1uF 25V
C296	1-163-038-00	s	CERAMIC 0.1uF 25V
C297	1-163-038-00	s	CERAMIC 0.1uF 25V
C298	1-163-038-00	s	CERAMIC 0.1uF 25V
C299	1-163-038-00	s	CERAMIC 0.1uF 25V
C300	1-163-038-00	s	CERAMIC 0.1uF 25V
C301	1-163-038-00	s	CERAMIC 0.1uF 25V
C302	1-163-038-00	s	CERAMIC 0.1uF 25V
C303	1-163-038-00	s	CERAMIC 0.1uF 25V
C304	1-163-038-00	s	CERAMIC 0.1uF 25V
C305	1-163-038-00	s	CERAMIC 0.1uF 25V
C306	1-163-038-00	s	CERAMIC 0.1uF 25V
C307	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C308	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C309	1-163-038-00	s	CERAMIC 0.1uF 25V
C310	1-163-038-00	s	CERAMIC 0.1uF 25V
C311	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C312	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C313	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C314	1-163-038-00	s	CERAMIC 0.1uF 25V
C315	1-163-038-00	s	CERAMIC 0.1uF 25V
C316	1-163-038-00	s	CERAMIC 0.1uF 25V
C317	1-163-038-00	s	CERAMIC 0.1uF 25V
C318	1-163-038-00	s	CERAMIC 0.1uF 25V
C319	1-163-038-00	s	CERAMIC 0.1uF 25V
C320	1-163-038-00	s	CERAMIC 0.1uF 25V
C321	1-163-038-00	s	CERAMIC 0.1uF 25V
C322	1-163-038-00	s	CERAMIC 0.1uF 25V
C323	1-163-038-00	s	CERAMIC 0.1uF 25V
C324	1-163-038-00	s	CERAMIC 0.1uF 25V
C325	1-163-038-00	s	CERAMIC 0.1uF 25V
C326	1-117-372-11	s	TANTALUM 100uF 20% 10V
C327	1-163-038-00	s	CERAMIC 0.1uF 25V
C328	1-163-038-00	s	CERAMIC 0.1uF 25V
C329	1-163-038-00	s	CERAMIC 0.1uF 25V
C330	1-163-038-00	s	CERAMIC 0.1uF 25V
C331	1-163-038-00	s	CERAMIC 0.1uF 25V
C332	1-163-038-00	s	CERAMIC 0.1uF 25V
C333	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C334	1-117-372-11	s	TANTALUM 100uF 20% 10V
C335	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C336	1-163-038-00	s	CERAMIC 0.1uF 25V
C337	1-163-038-00	s	CERAMIC 0.1uF 25V
C338	1-117-372-11	s	TANTALUM 100uF 20% 10V
C339	1-163-038-00	s	CERAMIC 0.1uF 25V

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C340	1-163-038-00	s	CERAMIC 0.1uF 25V
C341	1-163-038-00	s	CERAMIC 0.1uF 25V
C342	1-163-038-00	s	CERAMIC 0.1uF 25V
C343	1-163-038-00	s	CERAMIC 0.1uF 25V
C351	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C356	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C370	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C376	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C377	1-163-038-00	s	CERAMIC 0.1uF 25V
C378	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C384	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C389	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C390	1-163-038-00	s	CERAMIC 0.1uF 25V
C391	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C392	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C393	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C399	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C408	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C413	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C419	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C420	1-163-038-00	s	CERAMIC 0.1uF 25V
C421	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C425	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C441	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C442	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C450	1-163-038-00	s	CERAMIC 0.1uF 25V
C451	1-163-038-00	s	CERAMIC 0.1uF 25V
C452	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C474	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C475	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C492	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C507	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C533	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C534	1-163-038-00	s	CERAMIC 0.1uF 25V
C535	1-163-038-00	s	CERAMIC 0.1uF 25V
C536	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C572	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C573	1-117-372-11	s	TANTALUM 100uF 20% 10V
C591	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C595	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C596	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C597	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C609	1-117-372-11	s	TANTALUM 100uF 20% 10V
C610	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C614	1-117-372-11	s	TANTALUM 100uF 20% 10V
C615	1-163-038-00	s	CERAMIC 0.1uF 25V
C616	1-117-372-11	s	TANTALUM 100uF 20% 10V
C617	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C628	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C629	1-163-038-00	s	CERAMIC 0.1uF 25V
C630	1-126-940-11	s	CAPACITOR, ELECT 330MF/25V
CN1	1-764-645-11	s	CONNECTOR, BB 100P, MALE
CN2	1-764-645-11	s	CONNECTOR, BB 100P, MALE
CN3	1-764-645-11	s	CONNECTOR, BB 100P, MALE
F1 *g ⚠	1-576-566-21	s	FUSE,(SMD)
*b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
F2 *g ⚠	1-576-566-21	s	FUSE,(SMD)
*b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F3 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F4 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
IC1	8-759-271-78	s	IC DS26C32ATM
IC2	8-759-505-06	s	IC CXD8058Q
IC3 *c	8-759-464-48	s	IC CXD8900J
IC4 *c	8-759-464-48	s	IC CXD8900J
IC5 *c	8-759-464-48	s	IC CXD8900J
IC6 *c	8-759-464-48	s	IC CXD8900J
IC7	8-759-464-46	s	IC CXD8899J
IC8 *c	8-759-464-48	s	IC CXD8900J
IC9 *c	8-759-464-48	s	IC CXD8900J
IC10 *c	8-759-464-48	s	IC CXD8900J
IC11 *c	8-759-464-48	s	IC CXD8900J
IC12 *c	8-759-464-48	s	IC CXD8900J
IC13 *c	8-759-464-48	s	IC CXD8900J
IC14 *c	8-759-464-48	s	IC CXD8900J
IC15	8-759-271-82	s	IC DS3695ATM
IC16	8-759-456-26	s	IC 74LCX541MTCX
IC17	8-759-469-98	s	IC CAT93C66K-LE10
IC18	8-759-505-00	s	IC CXD8052Q
IC19	8-759-464-46	s	IC CXD8899J
IC20	8-759-464-46	s	IC CXD8899J
IC21	8-759-464-46	s	IC CXD8899J
IC22	8-759-464-46	s	IC CXD8899J
IC23	8-759-466-65	s	IC CXD8901Q
IC24 *c	8-759-464-48	s	IC CXD8900J
IC25	8-759-464-46	s	IC CXD8899J
IC26	8-759-464-46	s	IC CXD8899J
IC27	8-759-466-63	s	IC CXD8895Q
IC28	8-759-466-63	s	IC CXD8895Q
IC29	8-759-466-63	s	IC CXD8895Q
IC30	8-759-464-46	s	IC CXD8899J
IC31	8-759-464-46	s	IC CXD8899J
IC32	8-759-523-49	s	IC TC74ACT541FT(EL)
IC33	8-759-523-49	s	IC TC74ACT541FT(EL)
IC34	8-759-456-26	s	IC 74LCX541MTCX
IC35	8-759-523-49	s	IC TC74ACT541FT(EL)
IC36	8-759-456-26	s	IC 74LCX541MTCX
IC37	8-759-389-48	s	IC 74LCX16374MTDX
IC38	8-759-389-48	s	IC 74LCX16374MTDX
IC39	8-759-389-48	s	IC 74LCX16374MTDX
IC40	8-759-389-48	s	IC 74LCX16374MTDX
IC41	8-759-389-48	s	IC 74LCX16374MTDX
IC42	8-759-456-26	s	IC 74LCX541MTCX
IC43	8-759-464-46	s	IC CXD8899J
IC44	8-759-464-46	s	IC CXD8899J
IC45	8-759-464-46	s	IC CXD8899J
IC46	8-759-464-46	s	IC CXD8899J
IC47	8-759-466-65	s	IC CXD8901Q
IC48	8-759-466-65	s	IC CXD8901Q
IC49	8-759-466-65	s	IC CXD8901Q
IC50	8-759-505-00	s	IC CXD8052Q

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC51	8-759-464-46	s	IC CXD8899J
IC52	8-759-464-46	s	IC CXD8899J
IC53	8-759-523-49	s	IC TC74ACT541FT(EL)
IC54	8-759-389-48	s	IC 74LCX16374MTDX
IC55 *c	8-759-464-48	s	IC CXD8900J
IC56	8-759-389-48	s	IC 74LCX16374MTDX
IC57	8-759-389-48	s	IC 74LCX16374MTDX
IC58	8-759-466-63	s	IC CXD8895Q
IC59	8-759-523-49	s	IC TC74ACT541FT(EL)
IC60	8-759-456-26	s	IC 74LCX541MTCX
IC61	8-759-523-49	s	IC TC74ACT541FT(EL)
IC62	8-759-465-49	s	IC MC10ELT21DR2
IC63	8-759-389-48	s	IC 74LCX16374MTDX
IC64	8-759-466-21	s	IC S4405B-80
IC65	8-759-468-08	s	IC 74LVX3L384QSCX
IC66	8-759-466-59	s	IC CGS2535TVX
IC67	8-759-466-59	s	IC CGS2535TVX
IC68 *c	8-759-464-48	s	IC CXD8900J
IC69	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC70 *c	8-759-464-48	s	IC CXD8900J
IC71	8-759-464-46	s	IC CXD8899J
IC72	8-759-523-49	s	IC TC74ACT541FT(EL)
IC73	8-759-523-49	s	IC TC74ACT541FT(EL)
IC74	8-759-523-49	s	IC TC74ACT541FT(EL)
IC75	8-759-386-27	s	IC 74LCX04MTCX
IC76	8-759-389-48	s	IC 74LCX16374MTDX
IC77	8-759-389-48	s	IC 74LCX16374MTDX
IC78	8-759-464-46	s	IC CXD8899J
IC79	8-759-464-46	s	IC CXD8899J
IC80	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC81	8-759-523-49	s	IC TC74ACT541FT(EL)
IC82	8-759-523-49	s	IC TC74ACT541FT(EL)
IC83	8-759-466-59	s	IC CGS2535TVX
IC84	8-759-466-59	s	IC CGS2535TVX
IC85	8-759-466-59	s	IC CGS2535TVX
IC86	8-759-468-08	s	IC 74LVX3L384QSCX
IC87	8-759-439-44	s	IC CXD9024Q
IC88	8-759-466-63	s	IC CXD8895Q
IC89	8-759-389-48	s	IC 74LCX16374MTDX
IC90 *c	8-759-464-48	s	IC CXD8900J
IC91	8-759-572-83	s	IC CXD8898AQ
IC92	8-759-464-47	s	IC CXD8893J
IC93	8-759-464-47	s	IC CXD8893J
IC94	8-759-464-47	s	IC CXD8893J
IC95	8-759-464-47	s	IC CXD8893J
IC96	8-759-464-46	s	IC CXD8899J
IC97	8-759-464-46	s	IC CXD8899J
IC98	8-759-389-48	s	IC 74LCX16374MTDX
IC99	8-759-389-48	s	IC 74LCX16374MTDX
IC100 *c	8-759-464-48	s	IC CXD8900J
IC101	8-759-386-27	s	IC 74LCX04MTCX
IC102 *c	8-759-464-48	s	IC CXD8900J
IC103	8-759-572-83	s	IC CXD8898AQ
IC104	8-759-464-46	s	IC CXD8899J
IC105	8-759-523-49	s	IC TC74ACT541FT(EL)
IC106	8-759-523-49	s	IC TC74ACT541FT(EL)
IC107 *c	8-759-464-48	s	IC CXD8900J
IC108	8-759-466-63	s	IC CXD8895Q
IC109	8-759-466-63	s	IC CXD8895Q

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC110 *c	8-759-464-48	s	IC CXD8900J
IC111 *c	8-759-464-48	s	IC CXD8900J
IC112 *c	8-759-464-48	s	IC CXD8900J
IC113 *c	8-759-464-48	s	IC CXD8900J
IC114 *c	8-759-464-48	s	IC CXD8900J
IC115	8-759-505-00	s	IC CXD8052Q
IC116	8-759-464-46	s	IC CXD8899J
IC117	8-759-464-46	s	IC CXD8899J
IC118	8-759-464-46	s	IC CXD8899J
IC119	8-759-464-46	s	IC CXD8899J
IC120	8-759-466-65	s	IC CXD8901Q
IC121 *c	8-759-464-48	s	IC CXD8900J
IC122	8-759-464-46	s	IC CXD8899J
IC123	8-759-464-46	s	IC CXD8899J
IC124	8-759-466-63	s	IC CXD8895Q
IC125	8-759-466-63	s	IC CXD8895Q
IC126	8-759-466-63	s	IC CXD8895Q
IC127	8-759-464-46	s	IC CXD8899J
IC128	8-759-464-46	s	IC CXD8899J
IC129	8-759-456-26	s	IC 74LCX541MTCX
IC130	8-759-523-49	s	IC TC74ACT541FT(EL)
IC131	8-759-456-26	s	IC 74LCX541MTCX
IC132	8-759-389-48	s	IC 74LCX16374MTDX
IC133	8-759-389-48	s	IC 74LCX16374MTDX
IC134	8-759-389-48	s	IC 74LCX16374MTDX
IC135	8-759-389-48	s	IC 74LCX16374MTDX
IC136	8-759-389-48	s	IC 74LCX16374MTDX
IC137	8-759-456-26	s	IC 74LCX541MTCX
IC138	8-759-523-49	s	IC TC74ACT541FT(EL)
IC139	8-759-464-46	s	IC CXD8899J
IC140	8-759-464-46	s	IC CXD8899J
IC141	8-759-464-46	s	IC CXD8899J
IC142	8-759-464-46	s	IC CXD8899J
IC143	8-759-466-65	s	IC CXD8901Q
IC144	8-759-466-65	s	IC CXD8901Q
IC145	8-759-466-65	s	IC CXD8901Q
IC146	8-759-464-46	s	IC CXD8899J
IC147	8-759-464-46	s	IC CXD8899J
IC148	8-759-456-26	s	IC 74LCX541MTCX
IC149	8-759-523-49	s	IC TC74ACT541FT(EL)
IC150	8-759-389-48	s	IC 74LCX16374MTDX
IC151	8-759-466-63	s	IC CXD8895Q
IC152	8-759-389-48	s	IC 74LCX16374MTDX
IC153 *c	8-759-464-48	s	IC CXD8900J
IC154	8-759-389-48	s	IC 74LCX16374MTDX
IC155	8-759-456-26	s	IC 74LCX541MTCX
IC156	8-759-456-26	s	IC 74LCX541MTCX
IC157	8-759-523-49	s	IC TC74ACT541FT(EL)
IC158	8-759-389-48	s	IC 74LCX16374MTDX
IC159	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC160	8-759-464-46	s	IC CXD8899J
IC161 *c	8-759-464-48	s	IC CXD8900J
IC162 *c	8-759-464-48	s	IC CXD8900J
IC163	8-759-456-26	s	IC 74LCX541MTCX
IC164	8-759-456-26	s	IC 74LCX541MTCX
IC165	8-759-456-26	s	IC 74LCX541MTCX
IC166	8-759-386-27	s	IC 74LCX04MTCX
IC167	8-759-464-46	s	IC CXD8899J
IC168	8-759-464-46	s	IC CXD8899J

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC169	8-759-456-26	s	IC 74LCX541MTCX
IC170	8-759-456-26	s	IC 74LCX541MTCX
IC171	8-759-466-59	s	IC CGS2535TVX
IC172	8-759-466-59	s	IC CGS2535TVX
IC173	8-759-439-44	s	IC CXD9024Q
IC174	8-759-389-48	s	IC 74LCX16374MTDX
IC175 *c	8-759-464-48	s	IC CXD8900J
IC176	8-759-572-83	s	IC CXD8898AQ
IC177	8-759-464-46	s	IC CXD8899J
IC178	8-759-464-46	s	IC CXD8899J
IC179	8-759-464-47	s	IC CXD8893J
IC180	8-759-464-47	s	IC CXD8893J
IC181	8-759-464-47	s	IC CXD8893J
IC182	8-759-464-47	s	IC CXD8893J
IC183 *c	8-759-464-48	s	IC CXD8900J
IC184 *c	8-759-464-48	s	IC CXD8900J
R1	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R4	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R5	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R6	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R7	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R8	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R9	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R10	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R11	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R12	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R13	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R14	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R15	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R16	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R17	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R23	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R24	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R25	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R27	1-216-295-91	s	RES, CHIP 0
R28	1-216-295-91	s	RES, CHIP 0
R29	1-216-295-91	s	RES, CHIP 0
R30	1-216-295-91	s	RES, CHIP 0
R31	1-216-295-91	s	RES, CHIP 0
R33	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R34	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R36	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R37	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R39	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R40	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R41	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R42	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R43	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R51	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R52	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R54	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R56	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R58	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R59	1-216-295-91	s	RES, CHIP 0
R60	1-216-295-91	s	RES, CHIP 0
R61	1-216-295-91	s	RES, CHIP 0
R62	1-216-295-91	s	RES, CHIP 0
R63	1-216-295-91	s	RES, CHIP 0

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R64	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R65	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R66	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R67	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R68	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R69	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R75	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R80	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R82	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R84	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R87	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R88	1-216-295-91	s	RES, CHIP 0
R89	1-216-295-91	s	RES, CHIP 0
R90	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R91	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R92	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R93	1-216-295-91	s	RES, CHIP 0
R94	1-216-295-91	s	RES, CHIP 0
R96	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R97	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R98	1-216-295-91	s	RES, CHIP 0
R99	1-216-295-91	s	RES, CHIP 0
R100	1-216-295-91	s	RES, CHIP 0
R102	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R103	1-216-295-91	s	RES, CHIP 0
R104	1-216-295-91	s	RES, CHIP 0
R106	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R107	1-216-295-91	s	RES, CHIP 0
R108	1-216-295-91	s	RES, CHIP 0
R109	1-216-295-91	s	RES, CHIP 0
R110	1-216-295-91	s	RES, CHIP 0
R111	1-216-295-91	s	RES, CHIP 0
R112	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R113	1-216-295-91	s	RES, CHIP 0
R114	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R115	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R116	1-216-295-91	s	RES, CHIP 0
R118	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R119	1-216-295-91	s	RES, CHIP 0
R121	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R122	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R123	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R124	1-216-295-91	s	RES, CHIP 0
R125	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R126	1-216-295-91	s	RES, CHIP 0
R127	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R129	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R130	1-216-295-91	s	RES, CHIP 0
R131	1-216-295-91	s	RES, CHIP 0
R132	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R134	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R136	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R137	1-216-295-91	s	RES, CHIP 0
R138	1-216-295-91	s	RES, CHIP 0
R139	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R141	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R143	1-216-295-91	s	RES, CHIP 0
R144	1-216-295-91	s	RES, CHIP 0
R145	1-216-295-91	s	RES, CHIP 0

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R146	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R147	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R148	1-216-295-91	s	RES, CHIP 0
R149	1-216-295-91	s	RES, CHIP 0
R150	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R151	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R152	1-216-612-11	s	METAL, CHIP 24 0.50% 1/10W
R153	1-216-295-91	s	RES, CHIP 0
R154	1-216-295-91	s	RES, CHIP 0
R155	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R158	1-216-295-91	s	RES, CHIP 0
R159	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R160	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R161	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R162	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R165	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R168	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R169	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R172	1-216-295-91	s	RES, CHIP 0
R173	1-216-295-91	s	RES, CHIP 0
R174	1-216-295-91	s	RES, CHIP 0
R176	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R177	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R179	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R180	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R181	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R182	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R183	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R184	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R185	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R186	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R187	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R188	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R189	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R195	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R197	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R198	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R199	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R201	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R202	1-216-295-91	s	RES, CHIP 0
R203	1-216-295-91	s	RES, CHIP 0
R204	1-216-295-91	s	RES, CHIP 0
R205	1-216-295-91	s	RES, CHIP 0
R206	1-216-295-91	s	RES, CHIP 0
R208	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R209	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R212	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R213	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R214	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R218	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R219	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R222	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R223	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R224	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R226	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R229	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R232	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R233	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R235	1-216-295-91	s	RES, CHIP 0

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R237	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R239	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R240	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R241	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R243	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R246	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R248	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R250	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R252	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012)
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB10	1-234-078-11	s	RES, CHIP NETWORK 47
RB11	1-234-078-11	s	RES, CHIP NETWORK 47
RB12	1-234-078-11	s	RES, CHIP NETWORK 47
RB13	1-234-078-11	s	RES, CHIP NETWORK 47
RB14	1-234-078-11	s	RES, CHIP NETWORK 47
RB15	1-234-078-11	s	RES, CHIP NETWORK 47
RB16	1-234-078-11	s	RES, CHIP NETWORK 47
RB17	1-234-078-11	s	RES, CHIP NETWORK 47
RB18	1-234-078-11	s	RES, CHIP NETWORK 47
RB19	1-234-078-11	s	RES, CHIP NETWORK 47
RB20	1-233-448-11	s	RES, CHIP NETWORK 22
RB23	1-233-448-11	s	RES, CHIP NETWORK 22
RB24	1-233-448-11	s	RES, CHIP NETWORK 22
RB25	1-233-448-11	s	RES, CHIP NETWORK 22
RB26	1-233-448-11	s	RES, CHIP NETWORK 22
RB27	1-233-448-11	s	RES, CHIP NETWORK 22
RB28	1-233-448-11	s	RES, CHIP NETWORK 22
RB29	1-233-448-11	s	RES, CHIP NETWORK 22
RB30	1-233-448-11	s	RES, CHIP NETWORK 22
RB31	1-233-448-11	s	RES, CHIP NETWORK 22
RB32	1-233-448-11	s	RES, CHIP NETWORK 22
RB33	1-233-448-11	s	RES, CHIP NETWORK 22
RB34	1-233-448-11	s	RES, CHIP NETWORK 22
RB35	1-233-448-11	s	RES, CHIP NETWORK 22
RB36	1-233-448-11	s	RES, CHIP NETWORK 22
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB39	1-233-448-11	s	RES, CHIP NETWORK 22
RB40	1-233-448-11	s	RES, CHIP NETWORK 22
RB41	1-233-448-11	s	RES, CHIP NETWORK 22
RB42	1-233-448-11	s	RES, CHIP NETWORK 22
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22
RB45	1-233-448-11	s	RES, CHIP NETWORK 22
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB47	1-233-448-11	s	RES, CHIP NETWORK 22
RB48	1-233-448-11	s	RES, CHIP NETWORK 22
RB49	1-233-448-11	s	RES, CHIP NETWORK 22
RB50	1-233-235-11	s	RES, CHIP NETWORK 10k
RB51	1-234-078-11	s	RES, CHIP NETWORK 47
RB52	1-234-078-11	s	RES, CHIP NETWORK 47

(KPC-3 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB53	1-234-078-11	s	RES, CHIP NETWORK 47
RB54	1-234-078-11	s	RES, CHIP NETWORK 47
RB55	1-234-078-11	s	RES, CHIP NETWORK 47
RB56	1-234-078-11	s	RES, CHIP NETWORK 47
RB57	1-234-078-11	s	RES, CHIP NETWORK 47
RB58	1-234-078-11	s	RES, CHIP NETWORK 47
RB59	1-234-078-11	s	RES, CHIP NETWORK 47
RB60	1-234-078-11	s	RES, CHIP NETWORK 47
RB61	1-234-078-11	s	RES, CHIP NETWORK 47
RB62	1-234-078-11	s	RES, CHIP NETWORK 47
RB63	1-234-078-11	s	RES, CHIP NETWORK 47
RB64	1-234-078-11	s	RES, CHIP NETWORK 47
RB65	1-234-078-11	s	RES, CHIP NETWORK 47
RB66	1-233-448-11	s	RES, CHIP NETWORK 22
RB67	1-233-448-11	s	RES, CHIP NETWORK 22
RB68	1-233-448-11	s	RES, CHIP NETWORK 22
RB69	1-233-448-11	s	RES, CHIP NETWORK 22
RB70	1-233-448-11	s	RES, CHIP NETWORK 22
RB71	1-233-448-11	s	RES, CHIP NETWORK 22
RB72	1-233-448-11	s	RES, CHIP NETWORK 22
RB73	1-233-448-11	s	RES, CHIP NETWORK 22
RB74	1-233-448-11	s	RES, CHIP NETWORK 22
RB75	1-233-448-11	s	RES, CHIP NETWORK 22
RB76	1-233-448-11	s	RES, CHIP NETWORK 22
RB77	1-233-448-11	s	RES, CHIP NETWORK 22
RB78	1-233-448-11	s	RES, CHIP NETWORK 22
RB79	1-233-448-11	s	RES, CHIP NETWORK 22
RB80	1-233-448-11	s	RES, CHIP NETWORK 22
RB81	1-233-448-11	s	RES, CHIP NETWORK 22
RB82	1-233-448-11	s	RES, CHIP NETWORK 22
RB83	1-233-448-11	s	RES, CHIP NETWORK 22
RB84	1-233-448-11	s	RES, CHIP NETWORK 22
RB85	1-233-448-11	s	RES, CHIP NETWORK 22
RB86	1-233-448-11	s	RES, CHIP NETWORK 22
RB87	1-233-448-11	s	RES, CHIP NETWORK 22
RB88	1-233-448-11	s	RES, CHIP NETWORK 22
RB89	1-233-448-11	s	RES, CHIP NETWORK 22
RB90	1-233-448-11	s	RES, CHIP NETWORK 22
RB91	1-233-448-11	s	RES, CHIP NETWORK 22
RB92	1-233-235-11	s	RES, CHIP NETWORK 10k

KPC-15 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8322-468-A	o	MOUNTED CIRCUIT BOARD, KPC-15
2pcs	3-639-762-01	o	LABEL(D),HUSE
10pcs	4-886-821-11	s	SCREW,M3X6 CASE (SILVER)
6pcs	7-621-772-38	s	SCREW +B2X6
10pcs	7-621-773-87	s	SCREW +B2.6X10(EP-FE/CU,NI,CR)
6pcs	7-622-205-05	s	NUT M2 TYPE2
2pcs	7-622-207-05	s	NUT M2.6 TYPE2
C1	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C3	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C4	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C6	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C8	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C9	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C10	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C11	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C12	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C13	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C14	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C15	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C16	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C17	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C18	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C19	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C20	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C22	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C23	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C24	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C25	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C26	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C27	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C28	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C29	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C32	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C33	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C35	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C36	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C37	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C38	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C39	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C41	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C43	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C44	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C45	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C46	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C47	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C48	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C49	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C50	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C51	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C52	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C53	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C54	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C55	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C57	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C58	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C59	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C62	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C63	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C64	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C65	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C66	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C67	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C68	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C69	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C70	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C71	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C72	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C73	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C74	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C75	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C76	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C77	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C78	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C79	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C80	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C81	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C82	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C83	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C84	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C85	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C86	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C87	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C88	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C89	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C90	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C91	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C92	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C93	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C94	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C95	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C96	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C97	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C98	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C99	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C100	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C103	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C106	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C107	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C111	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C116	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C120	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C121	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C130	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C131	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C132	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C133	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C134	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C137	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C138	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C139	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C140	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C141	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C142	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C143	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C144	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C145	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C146	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C147	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C148	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C149	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C150	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C152	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C153	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C154	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C155	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C158	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C159	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C160	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C161	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C162	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C163	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C164	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C165	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C166	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C167	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C168	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C169	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C170	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C171	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C172	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C173	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C174	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C175	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C176	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C178	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C179	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C180	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C181	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C182	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C183	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C184	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C185	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C186	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C187	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C188	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C189	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C190	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C191	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C192	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C193	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C194	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C195	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C196	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C197	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C198	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C199	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C202	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C204	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C205	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C206	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C207	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C212	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C213	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C214	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C215	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C216	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C217	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C220	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C221	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C222	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C223	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C224	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C225	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C226	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C227	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C228	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C229	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C230	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C231	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C232	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C233	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C234	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C235	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C236	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C237	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C238	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C239	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C240	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C241	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C242	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C243	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C244	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C245	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C246	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C247	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C248	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C249	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C250	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C251	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C252	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C254	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C255	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C256	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C257	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C258	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C259	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C260	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C261	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C262	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C263	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C264	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C265	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C266	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C267	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C268	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C269	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C270	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C271	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C272	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C273	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C274	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C275	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C276	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C277	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C278	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C279	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C280	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C281	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C282	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C283	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C284	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C285	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C286	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C287	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C288	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C289	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C290	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C291	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C292	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C293	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C294	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C295	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C296	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C297	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C298	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C299	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C300	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C302	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C304	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C305	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C306	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C307	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C308	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C309	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C310	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C311	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C312	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C313	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C314	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C315	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C316	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C317	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C318	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C319	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C320	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C321	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C322	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C323	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C324	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C325	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C326	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C327	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C328	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C329	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C330	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C331	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C332	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C333	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C334	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C335	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C336	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C337	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C338	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C339	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C340	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C341	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C342	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C343	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C344	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C345	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C346	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C347	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C348	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C349	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C350	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C351	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C352	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C353	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C354	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C355	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C356	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C357	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C358	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C359	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C360	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C361	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C362	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C363	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C364	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C365	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C366	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C367	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C368	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C369	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C370	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C371	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C372	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C373	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C374	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C375	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C376	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C377	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C378	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C379	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C380	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C381	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C382	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C383	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C384	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C385	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C386	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C387	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C388	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C389	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C390	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C391	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C392	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C393	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C394	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C395	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C396	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C397	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C398	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C399	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C400	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C401	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C402	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C403	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C404	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C405	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C406	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C407	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C408	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C409	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C410	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C411	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C412	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C413	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C414	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C415	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C416	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C417	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C418	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C419	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C420	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C421	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C422	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C423	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C424	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C425	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C426	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C427	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C428	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C429	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C430	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C431	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C432	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C433	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C434	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C435	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C436	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C437	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C438	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C439	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C440	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C441	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C442	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C443	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C444	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C445	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C446	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C447	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C448	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C450	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C451	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C452	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C453	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C454	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C455	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C456	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C457	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C458	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C459	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C460	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C461	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C462	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C463	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C464	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C465	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C466	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C467	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C468	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C469	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C470	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C471	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C472	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C473	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C474	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C475	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C476	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C477	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C478	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C479	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C480	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C481	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C482	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C483	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C484	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C485	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C486	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C487	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C488	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C489	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C490	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C491	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C492	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C493	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C494	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C495	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C496	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C497	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C498	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C499	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C500	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C501	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C502	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C503	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C504	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C505	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C506	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C507	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C508	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C509	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C510	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C511	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C512	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C513	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C514	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C515	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C516	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C517	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C518	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C519	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C520	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C521	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C522	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C523	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C524	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C525	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C526	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C527	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C528	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C529	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C530	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C531	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C532	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C533	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C534	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C535	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C536	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C537	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C538	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C539	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C540	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C541	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C542	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C543	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C544	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C545	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C546	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C547	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C548	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C549	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C550	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C551	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C552	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C553	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C554	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C555	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C556	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C557	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C558	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C559	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C560	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C561	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C562	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C563	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C564	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C565	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C566	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C567	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C568	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C569	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C570	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C571	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C572	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C573	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C574	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C575	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C576	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C577	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C578	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C579	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C580	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C581	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C582	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C583	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C584	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C585	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C586	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C587	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C588	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C589	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C590	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C591	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C592	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C593	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C594	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C595	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C596	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C597	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C598	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C599	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C600	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C601	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C602	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C603	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C604	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C605	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C606	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C607	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C608	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C609	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C610	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C611	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C612	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C613	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C614	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C615	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C616	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C617	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C618	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C619	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C620	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C621	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C622	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C623	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C624	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C625	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C626	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C627	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C628	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C629	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C630	1-126-940-11	s	CAPACITOR,ELECT 330MF/25V
C631	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C632	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-764-645-11	s	CONNECTOR, BOARD TO BOARD 100P
CN2	1-764-645-11	s	CONNECTOR, BOARD TO BOARD 100P
CN3	1-764-645-11	s	CONNECTOR, BOARD TO BOARD 100P
F1	⚠ 1-576-566-21	s	FUSE (SMD)
F2	⚠ 1-576-566-21	s	FUSE (SMD)
F3	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F4	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
FB1	1-500-425-11	s	BEAD, FERRITE
FB2	1-500-425-11	s	BEAD, FERRITE

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1	8-759-271-78	s	IC DS26C32ATM
IC2	8-759-505-06	s	IC CXD8058Q
IC3	8-759-464-48	s	IC CXD8900J
IC4	8-759-464-48	s	IC CXD8900J
IC5	8-759-464-48	s	IC CXD8900J
IC6	8-759-464-48	s	IC CXD8900J
IC7	8-759-464-46	s	IC CXD8899J
IC8	8-759-464-48	s	IC CXD8900J
IC9	8-759-464-48	s	IC CXD8900J
IC10	8-759-464-48	s	IC CXD8900J
IC11	8-759-464-48	s	IC CXD8900J
IC12	8-759-464-48	s	IC CXD8900J
IC13	8-759-464-48	s	IC CXD8900J
IC14	8-759-464-48	s	IC CXD8900J
IC15	8-759-271-82	s	IC DS3695ATM
IC16	8-759-456-26	s	IC 74LCX541MTCX
IC17	8-759-469-98	s	IC CAT93C66K-LE10
IC18	8-759-505-00	s	IC CXD8052Q
IC19	8-759-464-46	s	IC CXD8899J
IC20	8-759-464-46	s	IC CXD8899J
IC21	8-759-464-46	s	IC CXD8899J
IC22	8-759-464-46	s	IC CXD8899J
IC23	8-759-466-65	s	IC CXD8901Q
IC24	8-759-464-48	s	IC CXD8900J
IC25	8-759-464-46	s	IC CXD8899J
IC26	8-759-464-46	s	IC CXD8899J
IC27	8-759-466-63	s	IC CXD8895Q
IC28	8-759-466-63	s	IC CXD8895Q
IC29	8-759-466-63	s	IC CXD8895Q
IC30	8-759-464-46	s	IC CXD8899J
IC31	8-759-464-46	s	IC CXD8899J
IC32	8-759-523-49	s	IC TC74ACT541FT(EL)
IC33	8-759-523-49	s	IC TC74ACT541FT(EL)
IC34	8-759-456-26	s	IC 74LCX541MTCX
IC35	8-759-523-49	s	IC TC74ACT541FT(EL)
IC36	8-759-456-26	s	IC 74LCX541MTCX
IC37	8-759-389-48	s	IC 74LCX16374MTDX
IC38	8-759-389-48	s	IC 74LCX16374MTDX
IC39	8-759-389-48	s	IC 74LCX16374MTDX
IC40	8-759-389-48	s	IC 74LCX16374MTDX
IC41	8-759-389-48	s	IC 74LCX16374MTDX
IC42	8-759-456-26	s	IC 74LCX541MTCX
IC43	8-759-464-46	s	IC CXD8899J
IC44	8-759-464-46	s	IC CXD8899J
IC45	8-759-464-46	s	IC CXD8899J
IC46	8-759-464-46	s	IC CXD8899J
IC47	8-759-466-65	s	IC CXD8901Q
IC48	8-759-466-65	s	IC CXD8901Q
IC49	8-759-466-65	s	IC CXD8901Q
IC50	8-759-505-00	s	IC CXD8052Q
IC51	8-759-464-46	s	IC CXD8899J
IC52	8-759-464-46	s	IC CXD8899J
IC53	8-759-523-49	s	IC TC74ACT541FT(EL)
IC54	8-759-389-48	s	IC 74LCX16374MTDX
IC55	8-759-464-48	s	IC CXD8900J
IC56	8-759-389-48	s	IC 74LCX16374MTDX
IC57	8-759-389-48	s	IC 74LCX16374MTDX
IC58	8-759-466-63	s	IC CXD8895Q
IC59	8-759-523-49	s	IC TC74ACT541FT(EL)

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC60	8-759-456-26	s	IC 74LCX541MTCX
IC61	8-759-523-49	s	IC TC74ACT541FT(EL)
IC62	8-759-465-49	s	IC MC10ELT21DR2
IC63	8-759-389-48	s	IC 74LCX16374MTDX
IC64	8-759-466-21	s	IC S4405B-80
IC65	8-759-468-08	s	IC 74LVX3L384QSCX
IC66	8-759-466-59	s	IC CGS2535TVX
IC67	8-759-466-59	s	IC CGS2535TVX
IC68	8-759-464-48	s	IC CXD8900J
IC69	8-759-830-39	s	IC PI74FCT16374ETA
IC70	8-759-464-48	s	IC CXD8900J
IC71	8-759-464-46	s	IC CXD8899J
IC72	8-759-523-49	s	IC TC74ACT541FT(EL)
IC73	8-759-523-49	s	IC TC74ACT541FT(EL)
IC74	8-759-523-49	s	IC TC74ACT541FT(EL)
IC75	8-759-386-27	s	IC 74LCX04MTCX
IC76	8-759-389-48	s	IC 74LCX16374MTDX
IC77	8-759-389-48	s	IC 74LCX16374MTDX
IC78	8-759-464-46	s	IC CXD8899J
IC79	8-759-464-46	s	IC CXD8899J
IC80	8-759-830-39	s	IC PI74FCT16374ETA
IC81	8-759-523-49	s	IC TC74ACT541FT(EL)
IC82	8-759-523-49	s	IC TC74ACT541FT(EL)
IC83	8-759-466-59	s	IC CGS2535TVX
IC84	8-759-466-59	s	IC CGS2535TVX
IC85	8-759-466-59	s	IC CGS2535TVX
IC86	8-759-468-08	s	IC 74LVX3L384QSCX
IC87	8-759-439-44	s	IC CXD9024Q
IC88	8-759-466-63	s	IC CXD8895Q
IC89	8-759-389-48	s	IC 74LCX16374MTDX
IC90	8-759-464-48	s	IC CXD8900J
IC91	8-759-572-83	s	IC CXD8898AQ
IC92	8-759-464-47	s	IC CXD8893J
IC93	8-759-464-47	s	IC CXD8893J
IC94	8-759-464-47	s	IC CXD8893J
IC95	8-759-464-47	s	IC CXD8893J
IC96	8-759-464-46	s	IC CXD8899J
IC97	8-759-464-46	s	IC CXD8899J
IC98	8-759-389-48	s	IC 74LCX16374MTDX
IC99	8-759-389-48	s	IC 74LCX16374MTDX
IC100	8-759-464-48	s	IC CXD8900J
IC101	8-759-386-27	s	IC 74LCX04MTCX
IC102	8-759-464-48	s	IC CXD8900J
IC103	8-759-572-83	s	IC CXD8898AQ
IC104	8-759-464-46	s	IC CXD8899J
IC105	8-759-523-49	s	IC TC74ACT541FT(EL)
IC106	8-759-523-49	s	IC TC74ACT541FT(EL)
IC107	8-759-464-48	s	IC CXD8900J
IC108	8-759-466-63	s	IC CXD8895Q
IC109	8-759-466-63	s	IC CXD8895Q
IC110	8-759-464-48	s	IC CXD8900J
IC111	8-759-464-48	s	IC CXD8900J
IC112	8-759-464-48	s	IC CXD8900J
IC113	8-759-464-48	s	IC CXD8900J
IC114	8-759-464-48	s	IC CXD8900J
IC115	8-759-505-00	s	IC CXD8052Q
IC116	8-759-464-46	s	IC CXD8899J
IC117	8-759-464-46	s	IC CXD8899J
IC118	8-759-464-46	s	IC CXD8899J

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC119	8-759-464-46	s	IC CXD8899J
IC120	8-759-466-65	s	IC CXD8901Q
IC121	8-759-464-48	s	IC CXD8900J
IC122	8-759-464-46	s	IC CXD8899J
IC123	8-759-464-46	s	IC CXD8899J
IC124	8-759-466-63	s	IC CXD8895Q
IC125	8-759-466-63	s	IC CXD8895Q
IC126	8-759-466-63	s	IC CXD8895Q
IC127	8-759-464-46	s	IC CXD8899J
IC128	8-759-464-46	s	IC CXD8899J
IC129	8-759-456-26	s	IC 74LCX541MTCX
IC130	8-759-523-49	s	IC TC74ACT541FT(EL)
IC131	8-759-456-26	s	IC 74LCX541MTCX
IC132	8-759-389-48	s	IC 74LCX16374MTDX
IC133	8-759-389-48	s	IC 74LCX16374MTDX
IC134	8-759-389-48	s	IC 74LCX16374MTDX
IC135	8-759-389-48	s	IC 74LCX16374MTDX
IC136	8-759-389-48	s	IC 74LCX16374MTDX
IC137	8-759-456-26	s	IC 74LCX541MTCX
IC138	8-759-523-49	s	IC TC74ACT541FT(EL)
IC139	8-759-464-46	s	IC CXD8899J
IC140	8-759-464-46	s	IC CXD8899J
IC141	8-759-464-46	s	IC CXD8899J
IC142	8-759-464-46	s	IC CXD8899J
IC143	8-759-466-65	s	IC CXD8901Q
IC144	8-759-466-65	s	IC CXD8901Q
IC145	8-759-466-65	s	IC CXD8901Q
IC146	8-759-464-46	s	IC CXD8899J
IC147	8-759-464-46	s	IC CXD8899J
IC148	8-759-456-26	s	IC 74LCX541MTCX
IC149	8-759-523-49	s	IC TC74ACT541FT(EL)
IC150	8-759-389-48	s	IC 74LCX16374MTDX
IC151	8-759-466-63	s	IC CXD8895Q
IC152	8-759-389-48	s	IC 74LCX16374MTDX
IC153	8-759-464-48	s	IC CXD8900J
IC154	8-759-389-48	s	IC 74LCX16374MTDX
IC155	8-759-456-26	s	IC 74LCX541MTCX
IC156	8-759-456-26	s	IC 74LCX541MTCX
IC157	8-759-523-49	s	IC TC74ACT541FT(EL)
IC158	8-759-389-48	s	IC 74LCX16374MTDX
IC159	8-759-830-39	s	IC PI74FCT16374ETA
IC160	8-759-464-46	s	IC CXD8899J
IC161	8-759-464-48	s	IC CXD8900J
IC162	8-759-464-48	s	IC CXD8900J
IC163	8-759-456-26	s	IC 74LCX541MTCX
IC164	8-759-456-26	s	IC 74LCX541MTCX
IC165	8-759-456-26	s	IC 74LCX541MTCX
IC166	8-759-386-27	s	IC 74LCX04MTCX
IC167	8-759-464-46	s	IC CXD8899J
IC168	8-759-464-46	s	IC CXD8899J
IC169	8-759-456-26	s	IC 74LCX541MTCX
IC170	8-759-456-26	s	IC 74LCX541MTCX
IC171	8-759-466-59	s	IC CGS2535TVX
IC172	8-759-466-59	s	IC CGS2535TVX
IC173	8-759-439-44	s	IC CXD9024Q
IC174	8-759-389-48	s	IC 74LCX16374MTDX
IC175	8-759-464-48	s	IC CXD8900J
IC176	8-759-572-83	s	IC CXD8898AQ
IC177	8-759-464-46	s	IC CXD8899J

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC178	8-759-464-46	s	IC CXD8899J
IC179	8-759-464-47	s	IC CXD8893J
IC180	8-759-464-47	s	IC CXD8893J
IC181	8-759-464-47	s	IC CXD8893J
IC182	8-759-464-47	s	IC CXD8893J
IC183	8-759-464-48	s	IC CXD8900J
IC184	8-759-464-48	s	IC CXD8900J
R1	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R4	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R5	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R6	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R7	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R8	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R9	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R10	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R11	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R12	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R13	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R14	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R15	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R16	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
R17	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R23	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R24	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R25	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R27	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R28	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R29	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R30	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R31	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R33	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R34	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R36	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R37	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R39	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R40	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R41	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R42	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R43	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R51	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R52	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R54	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R56	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R58	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R59	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R60	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R61	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R62	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R63	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R64	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R65	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R66	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R67	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R68	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R69	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R75	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R80	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R82	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R84	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R87	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R88	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R89	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R90	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R91	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R92	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R93	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R94	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R96	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R97	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R98	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R99	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R100	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R102	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R103	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R104	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R106	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R107	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R108	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R109	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R110	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R112	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R113	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R114	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R115	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R118	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R119	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R121	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R122	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R123	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R124	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R125	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R126	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R127	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R129	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R130	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R131	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R132	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R134	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R136	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R137	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R138	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R139	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R141	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R143	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R144	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R145	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R146	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R147	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R148	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R149	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R150	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R151	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R152	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R153	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R154	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R155	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R158	1-216-295-91	s	CONDUCTOR, CHIP (2012)

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R159	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R160	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R161	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R162	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R165	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R168	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R169	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R172	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R173	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R174	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R176	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R177	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R179	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R180	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R181	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R182	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R183	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R184	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R185	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R186	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R187	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R188	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R189	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R195	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R197	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R198	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R199	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R201	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R202	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R203	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R204	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R205	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R206	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R208	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R209	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R212	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R213	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R214	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R218	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R219	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R222	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R223	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R224	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R226	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R229	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R232	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R233	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R235	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R237	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R239	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R240	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R241	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R243	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R246	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R248	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R250	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R252	1-216-623-11	s	RESISTOR,CHIP 68 1/10W(2012)
R253	1-215-421-00	s	RESISTOR,METAL FILM 1K 1/4W
R254	1-215-421-00	s	RESISTOR,METAL FILM 1K 1/4W

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R255	1-215-421-00	s	RESISTOR,METAL FILM 1K 1/4W
R256	1-215-421-00	s	RESISTOR,METAL FILM 1K 1/4W
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB10	1-234-078-11	s	RES, CHIP NETWORK 47
RB11	1-234-078-11	s	RES, CHIP NETWORK 47
RB12	1-234-078-11	s	RES, CHIP NETWORK 47
RB13	1-234-078-11	s	RES, CHIP NETWORK 47
RB14	1-234-078-11	s	RES, CHIP NETWORK 47
RB15	1-234-078-11	s	RES, CHIP NETWORK 47
RB16	1-234-078-11	s	RES, CHIP NETWORK 47
RB17	1-234-078-11	s	RES, CHIP NETWORK 47
RB18	1-234-078-11	s	RES, CHIP NETWORK 47
RB19	1-234-078-11	s	RES, CHIP NETWORK 47
RB20	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB23	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB24	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB25	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB26	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB27	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB28	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB29	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB30	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB31	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB32	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB33	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB34	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB35	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB36	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB37	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB38	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB39	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB40	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB41	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB42	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB43	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB44	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB45	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB46	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB47	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB48	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB49	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB50	1-233-235-11	s	RESISTOR, CHIP NETWORK 10K
RB51	1-234-078-11	s	RES, CHIP NETWORK 47
RB52	1-234-078-11	s	RES, CHIP NETWORK 47
RB53	1-234-078-11	s	RES, CHIP NETWORK 47
RB54	1-234-078-11	s	RES, CHIP NETWORK 47
RB55	1-234-078-11	s	RES, CHIP NETWORK 47
RB56	1-234-078-11	s	RES, CHIP NETWORK 47
RB57	1-234-078-11	s	RES, CHIP NETWORK 47
RB58	1-234-078-11	s	RES, CHIP NETWORK 47

(KPC-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB59	1-234-078-11	s	RES, CHIP NETWORK 47
RB60	1-234-078-11	s	RES, CHIP NETWORK 47
RB61	1-234-078-11	s	RES, CHIP NETWORK 47
RB62	1-234-078-11	s	RES, CHIP NETWORK 47
RB63	1-234-078-11	s	RES, CHIP NETWORK 47
RB64	1-234-078-11	s	RES, CHIP NETWORK 47
RB65	1-234-078-11	s	RES, CHIP NETWORK 47
RB66	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB67	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB68	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB69	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB70	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB71	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB72	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB73	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB74	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB75	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB76	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB77	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB78	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB79	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB80	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB81	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB82	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB83	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB84	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB85	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB86	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB87	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB88	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB89	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB90	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB91	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB92	1-233-235-11	s	RESISTOR, CHIP NETWORK 10K

MB-494 BOARD

---

*a:[Lot No. 710 - 081]
*b:[Lot No. 082 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-477-A	o	MOUNTED CIRCUIT BOARD, MB-494
12pcs	3-187-548-02	s	GIZA TITE, +BV 3x10
8pcs	7-682-949-01	s	SCREW +PSW 3x10
CN201	1-506-703-11	o	CONNECTOR, ILG 4P, MALE
CN202	1-506-703-11	o	CONNECTOR, ILG 4P, MALE
CN203	1-580-838-11	o	CONNECTOR 4P, MALE
CN204	1-580-838-11	o	CONNECTOR 4P, MALE
CN205	1-560-356-00	o	CONNECTOR, ILG 2P, MALE
R1	*b 1-216-675-11	s	RESISTOR, CHIP 10 1/10W(2012)
	*a 1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W

MEM-87 BOARD

*a:[Lot No. 710 - 902]
*b:[Lot No. 903 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-512-A	o	MOUNTED CIRCUIT BOARD, MEM-87
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-038-00	s	CERAMIC 0.1uF 25V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-038-00	s	CERAMIC 0.1uF 25V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7 *b	1-117-231-11	s	CAPACITOR,(SMD) 6.8MF 16V
*a	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13 *b	1-117-231-11	s	CAPACITOR,(SMD) 6.8MF 16V
*a	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18 *b	1-117-231-11	s	CAPACITOR,(SMD) 6.8MF 16V
*a	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-163-038-00	s	CERAMIC 0.1uF 25V
C25 *b	1-117-231-11	s	CAPACITOR,(SMD) 6.8MF 16V
*a	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-163-038-00	s	CERAMIC 0.1uF 25V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
CN1	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
IC1	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC2	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC3	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC4	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC5	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC6	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC7	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
IC8	8-759-589-63	s	IC MT58LC128K18B4LG-9TR
R1	1-216-295-91	s	RES, CHIP 0
R2	1-216-295-91	s	RES, CHIP 0
R3	1-216-295-91	s	RES, CHIP 0

Ref. No. or Q'ty	Part No.	SP	Description
R4	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R5	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R6	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R7	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R8	1-216-295-91	s	RES, CHIP 0
R9	1-216-295-91	s	RES, CHIP 0
R10	1-216-295-91	s	RES, CHIP 0
R11	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R12	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R13	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R14	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R15	1-216-295-91	s	RES, CHIP 0
R16	1-216-295-91	s	RES, CHIP 0
R17	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R18	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R19	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R20	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R21	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R22	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R23	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R24	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W

MEM-92 BOARD

*a:[Lot No. 710 - 902]
*b:[Lot No. 903 -]

Ref. No. or Q'ty		Part No.	SP	Description
1pc		A-8317-513-A	o	MOUNTED CIRCUIT BOARD, MEM-92
1pc		7-682-545-04	s	SCREW +B 3x4
C1		1-163-038-00	s	CERAMIC 0.1uF 25V
C2	*b	1-117-231-11	s	CAPACITOR,(SMD) 6.8MF 16V
	*a	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C3		1-163-038-00	s	CERAMIC 0.1uF 25V
C4		1-163-038-00	s	CERAMIC 0.1uF 25V
C5		1-163-038-00	s	CERAMIC 0.1uF 25V
C6		1-163-038-00	s	CERAMIC 0.1uF 25V
C7	*b	1-117-231-11	s	CAPACITOR,(SMD) 6.8MF 16V
	*a	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C8		1-163-038-00	s	CERAMIC 0.1uF 25V
C9		1-163-038-00	s	CERAMIC 0.1uF 25V
C10		1-163-038-00	s	CERAMIC 0.1uF 25V
C11		1-107-818-11	s	DOUBLE LAYERS 1F 5.5V
C12		1-107-818-11	s	DOUBLE LAYERS 1F 5.5V
C13		1-107-818-11	s	DOUBLE LAYERS 1F 5.5V
C14		1-107-818-11	s	DOUBLE LAYERS 1F 5.5V
CN1		1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2		1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
D1		8-719-800-76	s	DIODE 1SS226
D2		8-719-800-76	s	DIODE 1SS226
IC1		8-759-527-44	s	IC MAX693ACSE
IC2		8-759-527-44	s	IC MAX693ACSE
IC3		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC4		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC5		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC6		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC7		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC8		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC9		6-701-950-01	s	IC HM628512CLTT-5SLZ
IC10		6-701-950-01	s	IC HM628512CLTT-5SLZ
R1		1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R2		1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W

MIX-13 BOARD

*a:[Lot No. 710 - 805]
*b:[Lot No. 806 -]
*c:[Lot No. 710 - 811]
*d:[Lot No. 811 -]
*e:[Lot No. 802 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-491-A	o	MOUNTED CIRCUIT BOARD, MIX-13
2pcs	3-194-878-01	s	LEVER, PC BOARD
14pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
2pcs	7-626-320-11	s	PIN, SPRING 3x8
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C4	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C5	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C20	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C21	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C22	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C23	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C24	1-128-401-11	s	ELECT 100uF 20% 25V
C25	1-128-401-11	s	ELECT 100uF 20% 25V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-163-038-00	s	CERAMIC 0.1uF 25V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C43	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C48	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-038-00	s	CERAMIC 0.1uF 25V
C53	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C54	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C75	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C79	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C80	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-038-00	s	CERAMIC 0.1uF 25V
C85	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C86	1-163-038-00	s	CERAMIC 0.1uF 25V
C87	1-163-038-00	s	CERAMIC 0.1uF 25V
C88	1-163-038-00	s	CERAMIC 0.1uF 25V
C89	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-038-00	s	CERAMIC 0.1uF 25V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C100	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-038-00	s	CERAMIC 0.1uF 25V
C105	1-163-038-00	s	CERAMIC 0.1uF 25V
C106	1-163-038-00	s	CERAMIC 0.1uF 25V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C107	1-163-038-00	s	CERAMIC 0.1uF 25V
C108	1-163-038-00	s	CERAMIC 0.1uF 25V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C116	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-163-038-00	s	CERAMIC 0.1uF 25V
C119	1-163-038-00	s	CERAMIC 0.1uF 25V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-038-00	s	CERAMIC 0.1uF 25V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C133	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C151	1-117-372-11	s	TANTALUM 100uF 20% 10V
C152	1-117-372-11	s	TANTALUM 100uF 20% 10V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-038-00	s	CERAMIC 0.1uF 25V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-038-00	s	CERAMIC 0.1uF 25V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-038-00	s	CERAMIC 0.1uF 25V
C215	1-163-038-00	s	CERAMIC 0.1uF 25V
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C220	1-163-038-00	s	CERAMIC 0.1uF 25V
C221	1-163-038-00	s	CERAMIC 0.1uF 25V
C222	1-163-038-00	s	CERAMIC 0.1uF 25V
C223	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C226	1-163-038-00	s	CERAMIC 0.1uF 25V
C227	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C228	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C229	1-163-038-00	s	CERAMIC 0.1uF 25V
C230	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C231	1-117-372-11	s	TANTALUM 100uF 20% 10V
C232	1-117-372-11	s	TANTALUM 100uF 20% 10V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-038-00	s	CERAMIC 0.1uF 25V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-038-00	s	CERAMIC 0.1uF 25V
C242	1-163-038-00	s	CERAMIC 0.1uF 25V
C243	1-163-038-00	s	CERAMIC 0.1uF 25V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-038-00	s	CERAMIC 0.1uF 25V
C250	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C251	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C258	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-038-00	s	CERAMIC 0.1uF 25V
C279	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C287	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C291	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C296	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C297	1-117-372-11	s	TANTALUM 100uF 20% 10V
C298	1-117-372-11	s	TANTALUM 100uF 20% 10V
C299	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C300	1-163-038-00	s	CERAMIC 0.1uF 25V
C301	1-163-038-00	s	CERAMIC 0.1uF 25V
C302	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C315	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C327	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C328	1-163-038-00	s	CERAMIC 0.1uF 25V
C329	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C335	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C344	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C350	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C358	1-126-396-11	s	ELECT, CHIP 47uF 20% 16V
C379	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C396	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C408	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C409	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C410	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C411	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C412	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C413	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C418	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C428	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C449	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C450	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C451	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C452	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C457	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C458	1-163-038-00	s	CERAMIC 0.1uF 25V
C459	1-163-038-00	s	CERAMIC 0.1uF 25V
C460	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C461	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C467	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C474	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C482	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C487	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C488	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C489	1-163-038-00	s	CERAMIC 0.1uF 25V
C490	1-163-038-00	s	CERAMIC 0.1uF 25V
C491	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C492	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C493	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C504	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C505	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C506	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C507	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C531	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C536	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C537	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C544	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C545	1-163-038-00	s	CERAMIC 0.1uF 25V
C546	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C551	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C566	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C567	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C573	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C596	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C603	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C630	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C631	1-163-038-00	s	CERAMIC 0.1uF 25V
C633	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C634	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C657	1-117-372-11	s	TANTALUM 100uF 20% 10V
C658	1-117-372-11	s	TANTALUM 100uF 20% 10V
C691	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C692	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C693	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C694	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C725	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C734	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C743	1-117-372-11	s	TANTALUM 100uF 20% 10V
C744	1-117-372-11	s	TANTALUM 100uF 20% 10V
C766	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C767	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C768	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C775	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C807	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C808	1-163-038-00	s	CERAMIC 0.1uF 25V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C809	1-163-038-00	s	CERAMIC 0.1uF 25V
C810	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C817	1-117-372-11	s	TANTALUM 100uF 20% 10V
C818	1-117-372-11	s	TANTALUM 100uF 20% 10V
C830	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C831	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C832	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C847	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C848	1-163-038-00	s	CERAMIC 0.1uF 25V
C849	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C861	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C901	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C902	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C915	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C922	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C923	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C924	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C925	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C940	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C941	1-163-038-00	s	CERAMIC 0.1uF 25V
C942	1-163-038-00	s	CERAMIC 0.1uF 25V
C943	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C948	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C957	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C958	1-163-038-00	s	CERAMIC 0.1uF 25V
C959	1-163-038-00	s	CERAMIC 0.1uF 25V
C960	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C961	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C966	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C967	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C976	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C986	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C987	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C994	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C995	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C996	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C997	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C998	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C999	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1000	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1001	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1002	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1003	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1004	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1005	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1006	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1007	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1008	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1009	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1010	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1011	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1012	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1013	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1014	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1015	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1016	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1017	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1018 *c	1-126-940-11	s	CAPACITOR, ELECT 330MF/25V

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
D2	8-719-975-84	s	DIODE AY1101W-88
D3	8-719-975-84	s	DIODE AY1101W-88
F1 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F2 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F3 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F4 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
F5 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A (CHIP)
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
IC1	8-759-465-49	s	IC MC10ELT21DR2
IC2	8-759-466-21	s	IC S4405B-80
IC3 *e	8-759-464-48	s	IC CXD8900J
IC4 *e	8-759-464-48	s	IC CXD8900J
IC5 *e	8-759-464-48	s	IC CXD8900J
IC6 *e	8-759-464-48	s	IC CXD8900J
IC7 *e	8-759-464-48	s	IC CXD8900J
IC9 *e	8-759-464-48	s	IC CXD8900J
IC10 *e	8-759-464-48	s	IC CXD8900J
IC11	8-759-466-59	s	IC CGS2535TVX
IC12 *e	8-759-464-48	s	IC CXD8900J
IC13 *e	8-759-464-48	s	IC CXD8900J
IC14 *e	8-759-464-48	s	IC CXD8900J
IC15 *e	8-759-464-48	s	IC CXD8900J
IC16 *e	8-759-464-48	s	IC CXD8900J
IC17	8-759-439-42	s	IC CXD9022R
IC18	8-759-439-42	s	IC CXD9022R
IC19	8-759-523-51	s	IC TC74ACT574FT(EL)
IC20	8-759-466-59	s	IC CGS2535TVX
IC21	8-759-466-59	s	IC CGS2535TVX
IC22	8-759-271-78	s	IC DS26C32ATM
IC23	8-759-386-26	s	IC 74LCX574MTCX
IC24 *e	8-759-464-48	s	IC CXD8900J
IC25 *e	8-759-464-48	s	IC CXD8900J
IC26 *e	8-759-464-48	s	IC CXD8900J
IC27 *e	8-759-464-48	s	IC CXD8900J
IC28 *e	8-759-464-48	s	IC CXD8900J
IC29 *e	8-759-464-48	s	IC CXD8900J
IC30 *e	8-759-464-48	s	IC CXD8900J
IC32 *e	8-759-464-48	s	IC CXD8900J
IC33 *e	8-759-464-48	s	IC CXD8900J
IC34 *e	8-759-464-48	s	IC CXD8900J
IC35 *e	8-759-464-48	s	IC CXD8900J
IC37	8-759-466-59	s	IC CGS2535TVX
IC38	8-759-466-59	s	IC CGS2535TVX
IC39	8-759-386-26	s	IC 74LCX574MTCX
IC40	8-759-439-42	s	IC CXD9022R
IC41	8-759-439-42	s	IC CXD9022R
IC42 *e	8-759-464-48	s	IC CXD8900J
IC43 *e	8-759-464-48	s	IC CXD8900J
IC44 *e	8-759-464-48	s	IC CXD8900J

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC45 *e	8-759-464-48	s	IC CXD8900J
IC47 *e	8-759-464-48	s	IC CXD8900J
IC48 *e	8-759-464-48	s	IC CXD8900J
IC49 *e	8-759-464-48	s	IC CXD8900J
IC50 *e	8-759-464-48	s	IC CXD8900J
IC51 *e	8-759-464-48	s	IC CXD8900J
IC52 *e	8-759-464-48	s	IC CXD8900J
IC53 *e	8-759-464-48	s	IC CXD8900J
IC54 *e	8-759-464-48	s	IC CXD8900J
IC55	8-759-386-26	s	IC 74LCX574MTCX
IC57	8-759-505-06	s	IC CXD8058Q
IC65	8-759-466-57	s	IC 74LCX157MTCX
IC66	8-759-466-55	s	IC 74LCX74MTCX
IC67	8-759-389-48	s	IC 74LCX16374MTDX
IC68	8-759-389-48	s	IC 74LCX16374MTDX
IC69	8-759-389-48	s	IC 74LCX16374MTDX
IC70	8-759-389-48	s	IC 74LCX16374MTDX
IC71	8-759-389-48	s	IC 74LCX16374MTDX
IC72	8-759-389-48	s	IC 74LCX16374MTDX
IC73	8-759-466-57	s	IC 74LCX157MTCX
IC74	8-759-466-57	s	IC 74LCX157MTCX
IC75	8-759-466-57	s	IC 74LCX157MTCX
IC76	8-759-466-57	s	IC 74LCX157MTCX
IC77	8-759-466-57	s	IC 74LCX157MTCX
IC78	8-759-386-27	s	IC 74LCX04MTCX
IC79	8-759-271-82	s	IC DS3695ATM
IC80	8-759-466-63	s	IC CXD8895Q
IC81	8-759-466-63	s	IC CXD8895Q
IC82	8-759-466-63	s	IC CXD8895Q
IC83	8-759-466-63	s	IC CXD8895Q
IC84 *e	8-759-464-48	s	IC CXD8900J
IC85 *e	8-759-464-48	s	IC CXD8900J
IC86 *e	8-759-464-48	s	IC CXD8900J
IC87 *e	8-759-464-48	s	IC CXD8900J
IC88	8-759-505-00	s	IC CXD8052Q
IC89	8-759-464-47	s	IC CXD8893J
IC90	8-759-464-47	s	IC CXD8893J
IC91	8-759-469-98	s	IC CAT93C66k-LE10
IC92	8-759-464-46	s	IC CXD8899J
IC93	8-759-464-46	s	IC CXD8899J
IC94	8-759-464-46	s	IC CXD8899J
IC95	8-759-464-46	s	IC CXD8899J
IC96	8-759-464-46	s	IC CXD8899J
IC97	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC98	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC99	8-759-466-62	s	IC CXD8894Q
IC100	8-759-466-62	s	IC CXD8894Q
IC101	8-759-523-49	s	IC TC74ACT541FT(EL)
IC102	8-759-523-49	s	IC TC74ACT541FT(EL)
IC103	8-759-466-63	s	IC CXD8895Q
IC105	8-759-466-63	s	IC CXD8895Q
IC107	8-759-456-26	s	IC 74LCX541MTCX
IC108	8-759-523-49	s	IC TC74ACT541FT(EL)
IC109	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC110	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC111	8-759-464-47	s	IC CXD8893J
IC112	8-759-464-47	s	IC CXD8893J
IC113	8-759-464-46	s	IC CXD8899J
IC114	8-759-464-46	s	IC CXD8899J

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC115	8-759-464-46	s	IC CXD8899J
IC116	8-759-464-46	s	IC CXD8899J
IC117	8-759-464-46	s	IC CXD8899J
IC118	8-759-466-62	s	IC CXD8894Q
IC119	8-759-466-62	s	IC CXD8894Q
IC120	8-759-439-44	s	IC CXD9024Q
IC121	8-759-439-44	s	IC CXD9024Q
IC122	8-759-439-44	s	IC CXD9024Q
IC123	8-759-439-44	s	IC CXD9024Q
IC124	8-759-456-26	s	IC 74LCX541MTCX
IC125	8-759-456-26	s	IC 74LCX541MTCX
IC126	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC127	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC128	8-759-466-62	s	IC CXD8894Q
IC129	8-759-466-62	s	IC CXD8894Q
IC130	8-759-523-49	s	IC TC74ACT541FT(EL)
IC131	8-759-464-46	s	IC CXD8899J
IC132	8-759-464-46	s	IC CXD8899J
IC133	8-759-464-46	s	IC CXD8899J
IC134	8-759-464-46	s	IC CXD8899J
IC135	8-759-464-46	s	IC CXD8899J
IC136	8-759-464-47	s	IC CXD8893J
IC137	8-759-464-47	s	IC CXD8893J
IC138	8-759-527-57	s	IC SN74ABT16823DGGR
IC139	8-759-527-57	s	IC SN74ABT16823DGGR
IC140	8-759-466-63	s	IC CXD8895Q
IC141	8-759-466-63	s	IC CXD8895Q
IC142	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC143	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC144	8-759-466-62	s	IC CXD8894Q
IC145	8-759-466-62	s	IC CXD8894Q
IC146	8-759-523-49	s	IC TC74ACT541FT(EL)
IC147	8-759-523-49	s	IC TC74ACT541FT(EL)
IC148	8-759-523-49	s	IC TC74ACT541FT(EL)
IC149	8-759-456-26	s	IC 74LCX541MTCX
IC150	8-759-456-26	s	IC 74LCX541MTCX
IC151	8-759-456-26	s	IC 74LCX541MTCX
IC152	8-759-464-46	s	IC CXD8899J
IC153	8-759-464-46	s	IC CXD8899J
IC154	8-759-464-46	s	IC CXD8899J
IC155	8-759-464-46	s	IC CXD8899J
IC156	8-759-464-46	s	IC CXD8899J
IC159	8-759-466-63	s	IC CXD8895Q
IC160	8-759-466-63	s	IC CXD8895Q
IC161	8-759-464-47	s	IC CXD8893J
IC162	8-759-464-47	s	IC CXD8893J
IC163	8-759-464-47	s	IC CXD8893J
IC164	8-759-456-26	s	IC 74LCX541MTCX
IC165	8-759-456-26	s	IC 74LCX541MTCX
IC166	8-759-523-49	s	IC TC74ACT541FT(EL)
IC167	8-759-523-49	s	IC TC74ACT541FT(EL)
IC168	8-759-456-26	s	IC 74LCX541MTCX
IC169	8-759-523-49	s	IC TC74ACT541FT(EL)
IC170	8-759-464-46	s	IC CXD8899J
IC171	8-759-464-46	s	IC CXD8899J
IC172	8-759-464-46	s	IC CXD8899J
IC173	8-759-464-46	s	IC CXD8899J
IC174	8-759-464-46	s	IC CXD8899J
IC175	8-759-527-57	s	IC SN74ABT16823DGGR

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC176	8-759-527-57	s	IC SN74ABT16823DGGR
IC177	8-759-466-63	s	IC CXD8895Q
IC178	8-759-466-63	s	IC CXD8895Q
IC179	8-759-505-00	s	IC CXD8052Q
IC180	8-759-523-49	s	IC TC74ACT541FT(EL)
IC181	8-759-523-49	s	IC TC74ACT541FT(EL)
IC182	8-759-464-47	s	IC CXD8893J
IC183	8-759-464-47	s	IC CXD8893J
IC184	8-759-464-47	s	IC CXD8893J
IC185	8-759-456-26	s	IC 74LCX541MTCX
IC186	8-759-456-26	s	IC 74LCX541MTCX
IC189	8-759-464-46	s	IC CXD8899J
IC190	8-759-464-46	s	IC CXD8899J
IC191	8-759-464-46	s	IC CXD8899J
IC192	8-759-464-46	s	IC CXD8899J
IC193	8-759-464-46	s	IC CXD8899J
IC196	8-759-456-26	s	IC 74LCX541MTCX
IC197	8-759-456-26	s	IC 74LCX541MTCX
IC199	8-759-527-57	s	IC SN74ABT16823DGGR
IC200	8-759-466-63	s	IC CXD8895Q
IC201 *e	8-759-464-48	s	IC CXD8900J
IC202 *e	8-759-464-48	s	IC CXD8900J
IC203 *e	8-759-464-48	s	IC CXD8900J
IC204 *e	8-759-464-48	s	IC CXD8900J
IC205	8-759-523-49	s	IC TC74ACT541FT(EL)
IC206	8-759-523-49	s	IC TC74ACT541FT(EL)
IC207	8-759-464-46	s	IC CXD8899J
IC208	8-759-464-46	s	IC CXD8899J
IC209	8-759-464-46	s	IC CXD8899J
IC210	8-759-464-46	s	IC CXD8899J
IC211	8-759-464-46	s	IC CXD8899J
IC213	8-759-456-26	s	IC 74LCX541MTCX
IC214	8-759-456-26	s	IC 74LCX541MTCX
IC215 *e	8-759-464-48	s	IC CXD8900J
IC216 *e	8-759-464-48	s	IC CXD8900J
IC217 *e	8-759-464-48	s	IC CXD8900J
IC218 *e	8-759-464-48	s	IC CXD8900J
IC219 *e	8-759-464-48	s	IC CXD8900J
IC222	8-759-466-63	s	IC CXD8895Q
IC224	8-759-464-46	s	IC CXD8899J
IC225	8-759-464-46	s	IC CXD8899J
IC226	8-759-464-46	s	IC CXD8899J
IC227	8-759-464-46	s	IC CXD8899J
IC228	8-759-464-46	s	IC CXD8899J
IC233 *e	8-759-464-48	s	IC CXD8900J
IC234 *e	8-759-464-48	s	IC CXD8900J
IC235 *e	8-759-464-48	s	IC CXD8900J
IC236 *e	8-759-464-48	s	IC CXD8900J
IC241	8-759-439-44	s	IC CXD9024Q
IC243	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC244	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC246	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC248	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC249	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC250	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC251	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC253	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC254	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC255	8-759-528-53	s	IC IDT74FCT16374ETPA-TL

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC257	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC258	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC259	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC261	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC262	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC263	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC300	8-759-464-46	s	IC CXD8899J
IC301	8-759-464-46	s	IC CXD8899J
IC302	8-759-464-46	s	IC CXD8899J
IC303	8-759-464-46	s	IC CXD8899J
IC304	8-759-464-46	s	IC CXD8899J
IC305	8-759-464-46	s	IC CXD8899J
IC306	8-759-464-46	s	IC CXD8899J
IC307	8-759-464-46	s	IC CXD8899J
IC308	8-759-464-46	s	IC CXD8899J
IC309	8-759-464-46	s	IC CXD8899J
IC310	8-759-464-46	s	IC CXD8899J
IC311	8-759-464-46	s	IC CXD8899J
IC312	8-759-464-46	s	IC CXD8899J
IC313	8-759-464-46	s	IC CXD8899J
IC314	8-759-464-46	s	IC CXD8899J
IC315	8-759-464-46	s	IC CXD8899J
IC316 *e	8-759-464-48	s	IC CXD8900J
IC317 *e	8-759-464-48	s	IC CXD8900J
IC318 *e	8-759-464-48	s	IC CXD8900J
IC319 *e	8-759-464-48	s	IC CXD8900J
IC320	8-759-466-59	s	IC CGS2535TVX
IC321	8-759-523-51	s	IC TC74ACT574FT(EL)
IC322	8-759-523-51	s	IC TC74ACT574FT(EL)
IC323 *e	8-759-464-48	s	IC CXD8900J
IC324	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC325	8-759-456-26	s	IC 74LCX541MTCX
IC326	8-759-523-49	s	IC TC74ACT541FT(EL)
IC327	8-759-523-49	s	IC TC74ACT541FT(EL)
IC328	8-759-523-49	s	IC TC74ACT541FT(EL)
IC329	8-759-456-26	s	IC 74LCX541MTCX
IC330	8-759-456-26	s	IC 74LCX541MTCX
IC331	8-759-523-49	s	IC TC74ACT541FT(EL)
IC332	8-759-523-49	s	IC TC74ACT541FT(EL)
IC333	8-759-523-49	s	IC TC74ACT541FT(EL)
IC334	8-759-523-49	s	IC TC74ACT541FT(EL)
IC335	8-759-523-49	s	IC TC74ACT541FT(EL)
IC336	8-759-456-26	s	IC 74LCX541MTCX
IC337	8-759-456-26	s	IC 74LCX541MTCX
IC338	8-759-456-26	s	IC 74LCX541MTCX
IC339	8-759-456-26	s	IC 74LCX541MTCX
IC340	8-759-456-26	s	IC 74LCX541MTCX
IC341	8-759-456-26	s	IC 74LCX541MTCX
IC342 *e	8-759-464-48	s	IC CXD8900J
IC343 *e	8-759-464-48	s	IC CXD8900J
IC344	8-759-523-49	s	IC TC74ACT541FT(EL)
IC345	8-759-389-26	s	IC 74LCX08MTCX
IC346	8-759-523-49	s	IC TC74ACT541FT(EL)
IC347	8-759-523-49	s	IC TC74ACT541FT(EL)
IC348	8-759-523-49	s	IC TC74ACT541FT(EL)
IC349	8-759-523-49	s	IC TC74ACT541FT(EL)
IC350	8-759-523-49	s	IC TC74ACT541FT(EL)
IC351	8-759-523-51	s	IC TC74ACT574FT(EL)
IC352	8-759-466-59	s	IC CGS2535TVX

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC353	8-759-466-59	s	IC CGS2535TVX
IC354	8-759-468-08	s	IC 74LVX3L384QSCX
IC355	8-759-468-08	s	IC 74LVX3L384QSCX
IC356	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC357	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC358	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC359	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC360	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC361	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC362	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC363	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC364	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC365	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC366	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC367	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC368	8-759-523-49	s	IC TC74ACT541FT(EL)
R1	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R2	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R3	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R4	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R5	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R7	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R8	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R9	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R12	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R13	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R15	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R16	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R17	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R20	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R21	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R22	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R23	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R27	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R30	1-216-667-11	s	METAL, CHIP 4.7k 0.5% 1/10W
R31	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R32	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R35	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R36	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R37	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R39	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R40	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R41	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R42	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R44	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R47	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R48	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R49	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R54	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R55	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R56	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R59	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R60	1-216-295-91	s	RES, CHIP 0
R61	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R62	1-216-295-91	s	RES, CHIP 0
R64	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R66	1-216-295-91	s	RES, CHIP 0
R67	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R69	1-216-295-91	s	RES, CHIP 0
R70	1-216-295-91	s	RES, CHIP 0
R71	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R72	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R74	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R77	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R79	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R82	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R84	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R86	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R87	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R89	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R90	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R93	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R96	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R98	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R102	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R103	1-216-295-91	s	RES, CHIP 0
R104	1-216-295-91	s	RES, CHIP 0
R105	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R106	1-216-295-91	s	RES, CHIP 0
R107	1-216-295-91	s	RES, CHIP 0
R108	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R109	1-216-295-91	s	RES, CHIP 0
R110	1-216-295-91	s	RES, CHIP 0
R111	1-216-295-91	s	RES, CHIP 0
R112	1-216-295-91	s	RES, CHIP 0
R113	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R114	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R115	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R116	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R117	1-216-295-91	s	RES, CHIP 0
R118	1-216-295-91	s	RES, CHIP 0
R119	1-216-295-91	s	RES, CHIP 0
R120	1-216-295-91	s	RES, CHIP 0
R121	1-216-295-91	s	RES, CHIP 0
R122	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R123	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R125	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R126	1-216-295-91	s	RES, CHIP 0
R127	1-216-295-91	s	RES, CHIP 0
R129	1-216-295-91	s	RES, CHIP 0
R130	1-216-295-91	s	RES, CHIP 0
R132	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R133	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R135	1-216-295-91	s	RES, CHIP 0
R136	1-216-295-91	s	RES, CHIP 0
R137	1-216-295-91	s	RES, CHIP 0
R139	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R141	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R143	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R144	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R145	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R146	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R147	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R148	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R149	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R150	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R151	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R152	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R154	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R155	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R158	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R159	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R163	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R164	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R166	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R167	1-216-295-91	s	RES, CHIP 0
R168	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R169	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R170	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R172	1-216-295-91	s	RES, CHIP 0
R173	1-216-295-91	s	RES, CHIP 0
R174	1-216-295-91	s	RES, CHIP 0
R175	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R176	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R180	1-216-295-91	s	RES, CHIP 0
R181	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R182	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R183	1-216-295-91	s	RES, CHIP 0
R184	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R188	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R189	1-216-295-91	s	RES, CHIP 0
R190	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R192	1-216-295-91	s	RES, CHIP 0
R193	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R194	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R195	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R196	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R197	1-216-295-91	s	RES, CHIP 0
R198	1-216-295-91	s	RES, CHIP 0
R199	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R201	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R204	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R205	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R208	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R209	1-216-295-91	s	RES, CHIP 0
R211	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R212	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R216	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R217	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R219	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R220	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R222	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R224	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R225	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R226	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R230	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R232	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R235	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R236	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R238	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R240	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R241	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R242	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R243	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R244	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R245	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R246	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R248	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R249	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R252	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R253	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R254	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R259	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R262	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R263	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R265	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R266	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R268	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R270	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R271	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R272	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R274	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R275	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R276	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R280	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R281	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R285	1-216-295-91	s	RES, CHIP 0
R287	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R288	1-216-295-91	s	RES, CHIP 0
R289	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R290	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R291	1-216-295-91	s	RES, CHIP 0
R292	1-216-295-91	s	RES, CHIP 0
R293	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R294	1-216-295-91	s	RES, CHIP 0
R297	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R298	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R300	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R302	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R304	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R306	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R308	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R310	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R312	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R314	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R318	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R320	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R321	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R323	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R326	1-216-295-91	s	RES, CHIP 0
R327	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R331	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R333	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R335	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R339	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R340	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R343	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R344	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R345	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R346	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R347	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R352	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R353	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R354	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R359	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R360	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R363	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R364	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R366	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R368	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R369	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R373	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R375	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R377	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R379	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R380	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R381	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R384	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R387	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R388	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R403	1-216-295-91	s	RES, CHIP 0
R404	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R405	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R406	1-216-295-91	s	RES, CHIP 0
R407	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R408	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R409	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R410	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R411	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R412	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R413	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R414	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R415	*c 1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012)
R416	1-216-623-11	s	RESISOTR, CHIP 68 1/10W(2012)
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB10	1-234-078-11	s	RES, CHIP NETWORK 47
RB11	1-234-078-11	s	RES, CHIP NETWORK 47
RB12	1-234-078-11	s	RES, CHIP NETWORK 47
RB13	1-234-078-11	s	RES, CHIP NETWORK 47
RB14	1-234-078-11	s	RES, CHIP NETWORK 47
RB15	1-234-078-11	s	RES, CHIP NETWORK 47
RB16	1-234-078-11	s	RES, CHIP NETWORK 47
RB17	1-234-078-11	s	RES, CHIP NETWORK 47
RB18	1-234-078-11	s	RES, CHIP NETWORK 47
RB19	1-234-078-11	s	RES, CHIP NETWORK 47
RB20	1-234-078-11	s	RES, CHIP NETWORK 47
RB21	1-234-078-11	s	RES, CHIP NETWORK 47
RB22	1-234-078-11	s	RES, CHIP NETWORK 47
RB23	1-234-078-11	s	RES, CHIP NETWORK 47
RB24	1-234-078-11	s	RES, CHIP NETWORK 47
RB25	1-234-077-11	s	RES, CHIP NETWORK 68
RB26	1-234-077-11	s	RES, CHIP NETWORK 68
RB27	1-234-077-11	s	RES, CHIP NETWORK 68
RB28	1-234-077-11	s	RES, CHIP NETWORK 68
RB29	1-234-077-11	s	RES, CHIP NETWORK 68
RB30	1-234-077-11	s	RES, CHIP NETWORK 68

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB31	1-234-077-11	s	RES, CHIP NETWORK 68
RB32	1-234-077-11	s	RES, CHIP NETWORK 68
RB33	1-234-077-11	s	RES, CHIP NETWORK 68
RB34	1-234-077-11	s	RES, CHIP NETWORK 68
RB35	1-234-077-11	s	RES, CHIP NETWORK 68
RB36	1-234-077-11	s	RES, CHIP NETWORK 68
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB39	1-234-077-11	s	RES, CHIP NETWORK 68
RB40	1-233-448-11	s	RES, CHIP NETWORK 22
RB41	1-233-448-11	s	RES, CHIP NETWORK 22
RB42	1-234-077-11	s	RES, CHIP NETWORK 68
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22
RB45	1-233-448-11	s	RES, CHIP NETWORK 22
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB47	1-233-448-11	s	RES, CHIP NETWORK 22
RB48	1-233-448-11	s	RES, CHIP NETWORK 22
RB49	1-233-448-11	s	RES, CHIP NETWORK 22
RB50	1-233-448-11	s	RES, CHIP NETWORK 22
RB51	1-233-448-11	s	RES, CHIP NETWORK 22
RB52	1-233-448-11	s	RES, CHIP NETWORK 22
RB53	1-233-448-11	s	RES, CHIP NETWORK 22
RB54	1-234-078-11	s	RES, CHIP NETWORK 47
RB55	1-234-078-11	s	RES, CHIP NETWORK 47
RB56	1-234-078-11	s	RES, CHIP NETWORK 47
RB57	1-234-078-11	s	RES, CHIP NETWORK 47
RB58	1-234-078-11	s	RES, CHIP NETWORK 47
RB59	1-234-078-11	s	RES, CHIP NETWORK 47
RB60	1-234-078-11	s	RES, CHIP NETWORK 47
RB61	1-234-078-11	s	RES, CHIP NETWORK 47
RB62	1-234-078-11	s	RES, CHIP NETWORK 47
RB63	1-234-078-11	s	RES, CHIP NETWORK 47
RB64	1-234-078-11	s	RES, CHIP NETWORK 47
RB65	1-234-078-11	s	RES, CHIP NETWORK 47
RB66	1-234-078-11	s	RES, CHIP NETWORK 47
RB67	1-234-078-11	s	RES, CHIP NETWORK 47
RB68	1-234-078-11	s	RES, CHIP NETWORK 47
RB69	1-234-078-11	s	RES, CHIP NETWORK 47
RB70	1-234-078-11	s	RES, CHIP NETWORK 47
RB71	1-234-078-11	s	RES, CHIP NETWORK 47
RB72	1-234-078-11	s	RES, CHIP NETWORK 47
RB73	1-234-078-11	s	RES, CHIP NETWORK 47
RB74	1-234-078-11	s	RES, CHIP NETWORK 47
RB75	1-234-077-11	s	RES, CHIP NETWORK 68
RB76	1-234-077-11	s	RES, CHIP NETWORK 68
RB77	1-234-077-11	s	RES, CHIP NETWORK 68
RB78	1-234-077-11	s	RES, CHIP NETWORK 68
RB79	1-234-077-11	s	RES, CHIP NETWORK 68
RB80	1-234-077-11	s	RES, CHIP NETWORK 68
RB81	1-234-077-11	s	RES, CHIP NETWORK 68
RB82	1-234-077-11	s	RES, CHIP NETWORK 68
RB83	1-234-077-11	s	RES, CHIP NETWORK 68
RB84	1-233-448-11	s	RES, CHIP NETWORK 22
RB85	1-234-077-11	s	RES, CHIP NETWORK 68
RB86	1-233-448-11	s	RES, CHIP NETWORK 22
RB87	1-234-077-11	s	RES, CHIP NETWORK 68
RB88	1-234-077-11	s	RES, CHIP NETWORK 68
RB89	1-233-448-11	s	RES, CHIP NETWORK 22

(MIX-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB90	1-233-448-11	s	RES, CHIP NETWORK 22
RB91	1-233-448-11	s	RES, CHIP NETWORK 22
RB92	1-233-448-11	s	RES, CHIP NETWORK 22
RB93	1-233-448-11	s	RES, CHIP NETWORK 22
RB94	1-233-448-11	s	RES, CHIP NETWORK 22
RB95	1-233-448-11	s	RES, CHIP NETWORK 22
RB96	1-233-448-11	s	RES, CHIP NETWORK 22
RB97	1-233-448-11	s	RES, CHIP NETWORK 22
RB124 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB125 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB126 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB127 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB128 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB129 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB145 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB146 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB147 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB148 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB149 *d	1-234-078-11	s	RES, CHIP NETWORK 47
RB150 *d	1-234-078-11	s	RES, CHIP NETWORK 47

MY-65 BOARD (HKDS-7041)
---

*a:[Lot No. 812 - 908]

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	3-194-878-01	s	LEVER, PC BOARD
14pcs	4-886-821-11	s	SCREW,M3X6 CASE (SILVER)
10pcs	7-621-773-87	s	SCREW +B2.6X10(EP-FE/CU,NI,CR)
2pcs	7-622-207-05	s	NUT M2.6 TYPE2
2pcs	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
C1	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C6	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C8	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C9	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C10	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C11	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C12	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C13	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C14	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C15	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C16	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C17	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C18	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C19	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C20	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C22	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C23	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C24	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C25	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C26	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C27	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C28	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C29	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C32	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C33	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C35	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C36	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C37	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C38	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C39	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C41	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C43	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C44	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C45	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C46	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C47	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C48	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C49	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C50	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C51	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C52	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C53	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C54	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C55	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C57	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C58	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C62	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C63	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C64	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C65	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C66	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C67	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C68	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C69	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C70	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C71	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C72	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C73	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C74	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C75	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C76	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C77	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C78	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C79	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C80	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C81	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C82	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C83	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C84	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C85	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C86	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C87	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C88	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C89	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C90	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C91	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C93	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C94	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C95	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C96	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C97	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C98	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C99	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C100	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C105	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C107	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C113	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C114	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C120	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C121	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C130	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C134	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C137	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C138	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C139	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C140	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C141	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C142	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C143	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C144	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C145	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C146	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C147	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C148	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C149	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C150	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C152	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C153	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C154	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C155	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C158	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C159	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C160	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C161	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C162	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C163	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C164	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C165	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C166	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C167	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C168	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C169	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C170	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C171	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C172	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C173	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C174	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C175	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C176	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C178	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C179	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C180	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C181	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C182	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C183	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C184	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C185	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C186	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C187	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C188	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C189	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C190	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C191	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C192	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C193	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C194	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C195	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C196	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C197	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C198	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C199	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C201	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C204	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C205	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C206	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C207	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C216	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C220	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C221	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C222	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C223	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C224	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C225	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C226	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C227	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C228	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C229	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C230	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C231	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C232	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C233	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C234	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C235	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C236	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C237	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C238	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C239	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C240	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C241	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C242	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C243	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C244	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C245	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C246	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C247	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C248	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C249	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C250	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C251	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C252	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C254	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C255	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C256	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C257	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C258	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C259	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C260	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C261	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C262	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C263	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C264	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C265	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C266	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C267	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C268	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C269	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C270	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C271	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C272	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C273	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C274	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C275	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C276	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C277	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C278	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C279	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C280	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C281	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C282	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C283	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C284	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C285	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C286	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C287	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C288	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C289	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C290	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C291	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C292	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C293	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C294	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C295	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C296	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C297	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C298	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C299	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C300	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C301	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C302	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C304	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C305	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C306	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C307	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C308	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C309	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C310	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C311	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C312	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C313	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C314	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C315	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C316	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C317	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C318	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C319	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C320	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C321	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C322	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C323	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C324	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C325	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C326	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C327	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C328	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C329	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C330	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C331	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C333	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C334	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C335	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C336	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C337	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C338	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C339	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C340	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C341	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C342	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C343	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C344	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C345	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C346	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C347	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C348	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C349	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C350	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C351	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C352	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C353	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C354	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C355	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C356	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C357	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C358	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C359	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C360	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C361	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C362	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C363	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C364	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C365	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C366	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C367	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C368	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C369	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C370	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C371	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C372	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C373	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C374	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C375	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C376	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C377	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C378	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C379	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C380	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C381	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C382	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C383	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C384	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C385	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C386	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C387	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C388	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C389	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C390	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C391	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C392	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C393	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C394	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C395	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C396	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C397	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C398	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C399	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C400	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C401	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C402	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C403	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C404	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C405	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C407	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C408	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C409	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C410	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C411	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C412	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C413	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C414	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C416	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C417	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C418	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C419	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C420	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C421	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C422	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C423	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C424	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C425	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C426	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C427	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C428	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C429	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C430	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C431	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C432	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C433	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C434	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C435	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C436	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C437	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C438	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C439	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C440	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C441	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C442	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C443	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C444	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C445	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C446	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C447	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C448	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C449	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C450	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C451	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C452	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C453	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C454	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C455	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C456	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C457	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C458	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C459	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C460	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C461	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C462	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C463	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C464	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C465	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C466	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C467	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C468	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C469	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C470	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C471	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C472	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C473	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C474	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C475	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C476	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C477	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C478	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C479	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C480	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C481	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C482	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C483	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C484	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C485	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C486	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C487	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C488	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C489	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C490	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C491	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C492	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C493	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C494	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C495	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C496	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C497	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C498	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C499	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C500	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C501	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C502	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C503	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C504	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C505	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C506	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C507	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C508	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C509	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C510	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C511	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C512	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C513	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C514	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C515	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C516	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C517	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C518	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C519	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C520	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C521	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C522	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C523	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C524	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C525	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C526	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C527	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C528	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C529	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C530	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C531	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C532	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C533	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C534	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C535	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C536	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C537	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C538	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C539	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C540	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C541	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C542	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C543	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C544	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C545	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C546	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C547	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C548	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C549	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C550	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C551	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C552	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C553	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C554	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C555	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C556	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C557	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C558	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C559	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C560	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C561	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C562	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C563	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C564	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C565	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C566	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C567	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C568	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C569	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C570	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C571	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C572	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C573	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C574	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C575	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C576	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C577	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C578	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C579	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C580	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C581	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C582	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C583	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C584	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C585	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C586	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C587	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C588	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C589	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C590	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C591	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C592	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C593	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C594	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C595	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C596	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C597	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C598	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C599	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C600	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C601	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C602	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C603	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C604	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C605	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C606	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C607	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C608	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C609	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C610	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C611	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C612	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C613	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C614	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C615	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C616	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C617	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C618	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C619	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C620	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C621	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C622	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C623	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C624	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C625	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C626	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C627	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C628	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C629	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C630	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C631	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C632	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C633	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C634	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C635	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C636	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C637	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C638	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C639	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C640	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C641	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C642	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C643	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C644	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C645	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C646	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C647	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C648	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C649	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C650	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C651	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C652	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C653	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C654	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C655	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C656	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C657	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C658	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C659	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C660	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C661	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C662	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C663	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C664	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C665	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C666	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C667	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C668	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C669	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C670	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C671	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C672	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C673	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C674	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C675	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C676	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C677	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C678	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C679	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C680	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C681	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C682	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C683	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C684	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C685	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C686	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C687	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C688	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C689	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C690	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C691	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C692	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C693	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C694	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C695	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C696	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C697	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C698	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C699	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C700	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C701	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C702	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C703	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C704	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C705	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C706	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C707	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C708	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C709	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C710	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C711	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C712	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C713	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C714	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C715	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C716	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C717	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C718	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C719	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C720	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C721	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C722	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C723	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C724	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C725	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C726	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C727	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C728	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C729	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C730	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C731	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C732	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C733	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C734	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C735	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C736	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C737	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C738	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C739	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C740	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C741	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C742	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C743	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C744	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C745	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C746	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C747	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C748	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C749	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C750	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C751	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C752	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C753	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C754	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C755	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C756	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C757	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C758	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C759	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C760	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C761	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C762	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C763	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C764	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C765	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C766	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C767	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C768	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C769	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C770	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C771	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C772	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C773	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C774	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C775	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C776	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C777	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C778	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C779	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C780	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C781	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C782	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C783	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C784	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C785	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C786	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C787	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C788	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C789	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C790	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C791	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C792	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C793	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C794	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C795	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C796	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C797	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C798	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C799	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C800	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C801	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C802	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C803	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C804	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C805	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C806	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C807	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C808	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C809	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C810	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C811	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C812	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C813	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C814	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C815	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C816	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C817	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C818	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C819	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C820	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C821	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C822	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C823	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C824	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C825	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C826	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C827	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C828	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C829	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C830	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C831	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C832	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C833	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C834	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C835	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C836	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C837	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C838	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C839	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C840	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C841	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C842	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C843	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C844	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C845	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C846	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C847	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C848	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C849	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C850	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C851	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C852	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C853	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C854	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C855	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C856	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C857	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C858	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C859	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C860	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C861	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C862	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C863	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C864	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C865	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C866	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C867	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C868	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C869	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C870	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C871	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C872	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C873	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C874	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C875	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C876	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C877	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C878	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C879	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C880	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C881	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C882	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C883	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C884	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C885	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C886	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C887	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C888	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C889	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C890	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C891	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C892	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C893	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C894	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C895	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C896	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C897	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C898	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C899	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C900	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C901	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C902	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C903	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C904	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C905	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C906	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C907	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C908	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C909	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C910	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C911	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C912	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C913	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C914	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C915	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C916	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C917	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C918	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C919	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C920	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C921	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C922	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C923	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C924	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C925	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C926	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C927	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C928	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C929	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C930	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C931	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C932	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C933	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C934	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C935	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C936	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C937	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C938	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C939	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C940	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C941	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C942	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C943	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C944	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C945	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C946	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C947	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C948	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C949	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C950	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C951	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C952	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C953	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C954	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C955	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C956	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C957	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C958	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C959	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C960	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C961	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C962	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C963	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C964	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C965	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C966	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C967	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C968	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C969	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C970	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C971	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C972	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C973	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C974	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C975	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C976	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C977	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C978	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C979	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C980	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C981	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C982	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C983	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C984	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C985	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C986	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C987	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C988	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C989	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C990	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C991	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C992	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C993	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C994	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C995	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C996	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C997	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C998	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C999	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1000	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1001	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1002	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1003	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1004	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1005	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C1006	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1007	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1008	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1009	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1010	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1011	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1012	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1013	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1014	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1015	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1016	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1017	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1018	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1019	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1020	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1021	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1022	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1023	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1024	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1025	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1026	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1027	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1028	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1029	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1030	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1031	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1032	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1033	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1034	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1035	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1036	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1037	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1038	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1039	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1040	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1041	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1042	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1043	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1044	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1045	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1046	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1047	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1048	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1049	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1050	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1051	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1052	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1053	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1054	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1055	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1056	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1057	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1058	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1059	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1060	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1061	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1062	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1063	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1064	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C1065	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1066	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1067	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1068	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1069	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1070	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1071	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1072	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1073	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1074	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1075	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1076	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1077	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1078	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1079	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1080	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1081	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1082	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1083	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1084	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1085	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1086	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1087	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1088	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1089	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1090	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1091	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1092	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1093	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1094	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1095	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1096	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1097	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1098	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1099	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1100	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1101	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1102	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1103	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1104	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1105	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1106	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1107	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1108	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1109	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1110	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1111	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1112	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1113	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1114	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1115	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1116	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1117	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1118	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1119	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1120	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1121	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1122	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1123	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C1124	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1125	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1126	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1127	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1128	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1129	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1130	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1131	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1132	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1133	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1134	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1135	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1136	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1137	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1138	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1139	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1140	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1141	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1142	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1143	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1144	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1145	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1146	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1147	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1148	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1149	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1150	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1151	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1152	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1153	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1154	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1155	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1156	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1157	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1158	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1159	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1182	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1185	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1186	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1188	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1190	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1192	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1215	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1217	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1218	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1219	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1227	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1234	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1252	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1253	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1256	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1258	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1269	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1286	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1300	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1600	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1601	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1602	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1603	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
C1604	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1605	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C1606	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
D1	8-719-975-84	s	LED AY1101W
D2	8-719-975-84	s	LED AY1101W
F1	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F2	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F3	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F4	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F5	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
F6	⚠ 1-533-843-21	s	FUSE, CHIP 10A (6125)
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
IC1	8-759-523-49	s	IC TC74ACT541FT(EL)
IC2	8-759-523-49	s	IC TC74ACT541FT(EL)
IC3	8-759-271-82	s	IC DS3695ATM
IC4	8-759-271-78	s	IC DS26C32ATM
IC5	8-759-464-48	s	IC CXD8900J
IC6	8-759-464-48	s	IC CXD8900J
IC7	8-759-464-48	s	IC CXD8900J
IC8	8-759-464-48	s	IC CXD8900J
IC9	8-759-464-48	s	IC CXD8900J
IC13	8-759-464-48	s	IC CXD8900J
IC14	8-759-464-48	s	IC CXD8900J
IC15	8-759-464-48	s	IC CXD8900J
IC16	8-759-469-98	s	IC CAT93C66K-LE10
IC17	8-759-523-49	s	IC TC74ACT541FT(EL)
IC20	8-759-464-48	s	IC CXD8900J
IC21	8-759-466-57	s	IC 74LCX157MTCX
IC22	8-759-466-57	s	IC 74LCX157MTCX
IC23	8-759-466-57	s	IC 74LCX157MTCX
IC24	8-759-466-57	s	IC 74LCX157MTCX
IC25	8-759-466-57	s	IC 74LCX157MTCX
IC26	8-759-466-57	s	IC 74LCX157MTCX
IC27	8-759-466-57	s	IC 74LCX157MTCX
IC28	8-759-466-57	s	IC 74LCX157MTCX
IC29	8-759-466-57	s	IC 74LCX157MTCX
IC30	8-759-386-26	s	IC 74LCX574MTCX
IC31	8-759-386-26	s	IC 74LCX574MTCX
IC34	8-759-464-48	s	IC CXD8900J
IC35	8-759-389-48	s	IC 74LCX16374MTDX
IC36	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC37	8-759-456-26	s	IC 74LCX541MTCX
IC38	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC39	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC40	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC41	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC42	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC43	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC44	8-759-386-26	s	IC 74LCX574MTCX
IC45	8-759-386-26	s	IC 74LCX574MTCX
IC46	8-759-505-00	s	IC CXD8052Q
IC47	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC48	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC49	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC50	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC51	8-759-523-49	s	IC TC74ACT541FT(EL)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC53	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC54	8-759-389-48	s	IC 74LCX16374MTDX
IC55	8-759-389-48	s	IC 74LCX16374MTDX
IC56	8-759-389-48	s	IC 74LCX16374MTDX
IC57	8-759-523-49	s	IC TC74ACT541FT(EL)
IC58	8-759-456-26	s	IC 74LCX541MTCX
IC59	8-759-386-26	s	IC 74LCX574MTCX
IC60	8-759-572-83	s	IC CXD8898AQ
IC61	8-759-386-26	s	IC 74LCX574MTCX
IC62	8-759-505-09	s	IC CXD8061
IC63	8-759-505-06	s	IC CXD8058Q
IC64	8-759-505-09	s	IC CXD8061
IC66	8-759-523-49	s	IC TC74ACT541FT(EL)
IC67	8-759-456-26	s	IC 74LCX541MTCX
IC68	8-759-456-26	s	IC 74LCX541MTCX
IC69	8-759-464-48	s	IC CXD8900J
IC70	8-759-439-44	s	IC CXD9024Q
IC74	8-759-456-26	s	IC 74LCX541MTCX
IC75	8-759-523-49	s	IC TC74ACT541FT(EL)
IC76	8-759-456-26	s	IC 74LCX541MTCX
IC77	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC78	8-759-456-26	s	IC 74LCX541MTCX
IC79	8-759-386-27	s	IC 74LCX04MTCX
IC80	8-759-386-26	s	IC 74LCX574MTCX
IC81	8-759-386-26	s	IC 74LCX574MTCX
IC82	8-759-386-26	s	IC 74LCX574MTCX
IC83	8-759-456-26	s	IC 74LCX541MTCX
IC84	8-759-456-26	s	IC 74LCX541MTCX
IC85	8-759-456-26	s	IC 74LCX541MTCX
IC86	8-759-523-49	s	IC TC74ACT541FT(EL)
IC87	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC88	8-759-505-00	s	IC CXD8052Q
IC89	8-759-531-44	o	IC WS57C71-ENH LSB
IC90	8-759-531-45	o	IC WS57C71-ENH MSB
IC91	8-759-531-44	o	IC WS57C71-ENH LSB
IC92	8-759-531-45	o	IC WS57C71-ENH MSB
IC93	8-759-389-48	s	IC 74LCX16374MTDX
IC94	8-759-389-48	s	IC 74LCX16374MTDX
IC95	8-759-389-48	s	IC 74LCX16374MTDX
IC96	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC97	8-759-386-26	s	IC 74LCX574MTCX
IC98	8-759-386-26	s	IC 74LCX574MTCX
IC99	8-759-386-26	s	IC 74LCX574MTCX
IC100	8-759-523-49	s	IC TC74ACT541FT(EL)
IC101	8-759-386-26	s	IC 74LCX574MTCX
IC102	8-759-389-48	s	IC 74LCX16374MTDX
IC103	8-759-389-48	s	IC 74LCX16374MTDX
IC104	8-759-389-48	s	IC 74LCX16374MTDX
IC106	8-759-389-48	s	IC 74LCX16374MTDX
IC107	8-759-389-48	s	IC 74LCX16374MTDX
IC108	8-759-389-48	s	IC 74LCX16374MTDX
IC109	8-759-389-48	s	IC 74LCX16374MTDX
IC110	8-759-466-59	s	IC CGS2535TVX
IC111	8-759-466-59	s	IC CGS2535TVX
IC112	8-759-466-59	s	IC CGS2535TVX
IC113	8-759-465-49	s	IC MC10ELT21DR2
IC114	8-759-456-26	s	IC 74LCX541MTCX
IC115	8-759-456-26	s	IC 74LCX541MTCX
IC116	8-759-386-26	s	IC 74LCX574MTCX

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC117	8-759-389-48	s	IC 74LCX16374MTDX
IC120	8-759-439-42	s	IC CXD9022R
IC121	8-759-464-48	s	IC CXD8900J
IC122	8-759-523-51	s	IC TC74ACT574FT(EL)
IC123	8-759-505-00	s	IC CXD8052Q
IC124	8-759-389-48	s	IC 74LCX16374MTDX
IC125	8-759-466-59	s	IC CGS2535TVX
IC126	8-759-466-21	s	IC S4405B-80
IC127	8-759-523-51	s	IC TC74ACT574FT(EL)
IC128	8-759-523-51	s	IC TC74ACT574FT(EL)
IC129	8-759-505-08	s	IC CXD8060Q
IC130	8-759-505-08	s	IC CXD8060Q
IC131	8-759-474-52	s	IC CXD9038R
IC132	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC133	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC134	8-759-464-46	s	IC CXD8899J
IC137	8-759-466-59	s	IC CGS2535TVX
IC138	8-759-466-59	s	IC CGS2535TVX
IC139	8-759-466-59	s	IC CGS2535TVX
IC140	8-759-523-49	s	IC TC74ACT541FT(EL)
IC141	8-759-456-26	s	IC 74LCX541MTCX
IC142	8-759-456-26	s	IC 74LCX541MTCX
IC143	8-759-456-26	s	IC 74LCX541MTCX
IC145	8-759-523-43	s	IC TC74ACT157FT(EL)
IC146	8-759-523-43	s	IC TC74ACT157FT(EL)
IC147	8-759-523-43	s	IC TC74ACT157FT(EL)
IC148	8-759-456-26	s	IC 74LCX541MTCX
IC149	8-759-456-26	s	IC 74LCX541MTCX
IC150	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC151	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC152	8-759-523-49	s	IC TC74ACT541FT(EL)
IC153	8-759-456-26	s	IC 74LCX541MTCX
IC154	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC155	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC156	8-759-456-26	s	IC 74LCX541MTCX
IC157	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC158	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC159	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC160	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC161	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC162	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC163	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC164	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC165	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC166	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC167	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC168	8-759-295-88	s	IC HM530281RTT-20
IC169	8-759-295-88	s	IC HM530281RTT-20
IC170	8-759-295-88	s	IC HM530281RTT-20
IC172	8-759-464-46	s	IC CXD8899J
IC174	8-759-523-43	s	IC TC74ACT157FT(EL)
IC175	8-759-523-43	s	IC TC74ACT157FT(EL)
IC176	8-759-523-43	s	IC TC74ACT157FT(EL)
IC177	8-759-527-57	s	IC SN74ABT16823DGGR
IC178	8-759-527-57	s	IC SN74ABT16823DGGR
IC179	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC180	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC181	8-759-295-88	s	IC HM530281RTT-20
IC182	8-759-295-88	s	IC HM530281RTT-20

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC183	8-759-295-88	s	IC HM530281RTT-20
IC184	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC185	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC186	8-759-464-48	s	IC CXD8900J
IC187	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC188	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC189	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC190	8-759-386-26	s	IC 74LCX574MTCX
IC191	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC192	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC193	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC194	8-759-360-61	s	IC CXD8848AQ
IC195	8-759-360-61	s	IC CXD8848AQ
IC196	8-759-389-30	s	IC 74LCX32MTCX
IC197	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC198	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC199	8-759-295-88	s	IC HM530281RTT-20
IC200	8-759-295-88	s	IC HM530281RTT-20
IC201	8-759-295-88	s	IC HM530281RTT-20
IC202	8-759-386-28	s	IC 74LCX00MTCX
IC203	8-759-386-27	s	IC 74LCX04MTCX
IC204	8-759-527-57	s	IC SN74ABT16823DGGR
IC205	8-759-295-88	s	IC HM530281RTT-20
IC206	8-759-295-88	s	IC HM530281RTT-20
IC207	8-759-527-57	s	IC SN74ABT16823DGGR
IC208	8-759-527-57	s	IC SN74ABT16823DGGR
IC209	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC210	8-759-464-48	s	IC CXD8900J
IC211	8-759-464-48	s	IC CXD8900J
IC212	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC213	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC214	8-759-295-88	s	IC HM530281RTT-20
IC215	8-759-295-88	s	IC HM530281RTT-20
IC216	8-759-295-88	s	IC HM530281RTT-20
IC217	8-759-527-57	s	IC SN74ABT16823DGGR
IC218	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC219	8-759-295-88	s	IC HM530281RTT-20
IC220	8-759-295-88	s	IC HM530281RTT-20
IC221	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC222	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC223	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC224	8-759-386-27	s	IC 74LCX04MTCX
IC225	8-759-389-30	s	IC 74LCX32MTCX
IC226	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC227	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC228	8-759-295-88	s	IC HM530281RTT-20
IC229	8-759-295-88	s	IC HM530281RTT-20
IC230	8-759-527-57	s	IC SN74ABT16823DGGR
IC231	8-759-360-61	s	IC CXD8848AQ
IC232	8-759-360-61	s	IC CXD8848AQ
IC233	8-759-464-48	s	IC CXD8900J
IC234	8-759-464-48	s	IC CXD8900J
IC235	8-759-389-26	s	IC 74LCX08MTCX
IC236	8-759-464-48	s	IC CXD8900J
IC237	8-759-464-48	s	IC CXD8900J
IC238	8-759-464-48	s	IC CXD8900J
IC239	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC240	8-759-523-39	s	IC TC74ACT32FT(EL)
IC241	8-759-527-57	s	IC SN74ABT16823DGGR

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC242	8-759-295-88	s	IC HM530281RTT-20
IC243	8-759-295-88	s	IC HM530281RTT-20
IC244	8-759-505-06	s	IC CXD8058Q
IC245	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC246	8-759-464-48	s	IC CXD8900J
IC247	8-759-464-48	s	IC CXD8900J
IC248	8-759-464-48	s	IC CXD8900J
IC249	8-759-464-48	s	IC CXD8900J
IC250	8-759-464-48	s	IC CXD8900J
IC251	8-759-464-48	s	IC CXD8900J
IC252	8-759-389-48	s	IC 74LCX16374MTDX
IC253	8-759-389-26	s	IC 74LCX08MTCX
IC254	8-759-464-48	s	IC CXD8900J
IC255	8-759-464-48	s	IC CXD8900J
IC256	8-759-464-48	s	IC CXD8900J
IC257	8-759-464-48	s	IC CXD8900J
IC258	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC259	8-759-464-48	s	IC CXD8900J
IC263	8-759-464-48	s	IC CXD8900J
IC264	8-759-389-48	s	IC 74LCX16374MTDX
IC265	8-759-389-48	s	IC 74LCX16374MTDX
IC266	8-759-389-48	s	IC 74LCX16374MTDX
IC267	8-759-464-48	s	IC CXD8900J
IC268	8-759-389-26	s	IC 74LCX08MTCX
IC269	8-759-386-26	s	IC 74LCX574MTCX
IC270	8-759-386-26	s	IC 74LCX574MTCX
IC271	8-759-456-26	s	IC 74LCX541MTCX
IC272	8-759-466-55	s	IC 74LCX74MTCX
IC273	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC274	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC276	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC277	8-759-523-49	s	IC TC74ACT541FT(EL)
IC278	8-759-456-26	s	IC 74LCX541MTCX
IC279	8-759-456-26	s	IC 74LCX541MTCX
IC280	8-759-572-83	s	IC CXD8898AQ
IC281	8-759-464-48	s	IC CXD8900J
IC282	8-759-464-48	s	IC CXD8900J
IC283	8-759-464-48	s	IC CXD8900J
IC284	8-759-505-09	s	IC CXD8061
IC285	8-759-505-09	s	IC CXD8061
IC286	8-759-466-59	s	IC CGS2535TVX
IC287	8-759-466-59	s	IC CGS2535TVX
IC288	8-759-439-44	s	IC CXD9024Q
IC289	8-759-456-26	s	IC 74LCX541MTCX
IC290	8-759-456-26	s	IC 74LCX541MTCX
IC291	8-759-523-49	s	IC TC74ACT541FT(EL)
IC292	8-759-456-26	s	IC 74LCX541MTCX
IC293	8-759-523-49	s	IC TC74ACT541FT(EL)
IC294	8-759-523-49	s	IC TC74ACT541FT(EL)
IC295	8-759-456-26	s	IC 74LCX541MTCX
IC296	8-759-531-45	o	IC WS57C71-ENH MSB
IC297	8-759-531-44	o	IC WS57C71-ENH LSB
IC298	8-759-531-44	o	IC WS57C71-ENH LSB
IC299	8-759-531-45	o	IC WS57C71-ENH MSB
IC300	8-759-389-48	s	IC 74LCX16374MTDX
IC301	8-759-389-48	s	IC 74LCX16374MTDX
IC302	8-759-389-48	s	IC 74LCX16374MTDX
IC303	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC306	8-759-523-49	s	IC TC74ACT541FT(EL)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC307	8-759-456-26	s	IC 74LCX541MTCX
IC308	8-759-389-48	s	IC 74LCX16374MTDX
IC309	8-759-389-48	s	IC 74LCX16374MTDX
IC310	8-759-389-48	s	IC 74LCX16374MTDX
IC312	8-759-389-48	s	IC 74LCX16374MTDX
IC313	8-759-389-48	s	IC 74LCX16374MTDX
IC314	8-759-389-48	s	IC 74LCX16374MTDX
IC315	8-759-389-48	s	IC 74LCX16374MTDX
IC316	8-759-466-59	s	IC CGS2535TVX
IC317	8-759-523-49	s	IC TC74ACT541FT(EL)
IC318	8-759-389-48	s	IC 74LCX16374MTDX
IC321	8-759-439-42	s	IC CXD9022R
IC322	8-759-456-26	s	IC 74LCX541MTCX
IC323	8-759-456-26	s	IC 74LCX541MTCX
IC325	8-759-389-48	s	IC 74LCX16374MTDX
IC326	8-759-466-59	s	IC CGS2535TVX
IC327	8-759-468-08	s	IC 74LVX3L384QSCX
IC328	8-759-456-26	s	IC 74LCX541MTCX
IC329	8-759-456-26	s	IC 74LCX541MTCX
IC330	8-759-505-08	s	IC CXD8060Q
IC331	8-759-505-08	s	IC CXD8060Q
IC332	8-759-474-52	s	IC CXD9038R
IC333	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC334	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC335	8-759-464-46	s	IC CXD8899J
IC337	8-759-468-08	s	IC 74LVX3L384QSCX
IC338	8-759-466-59	s	IC CGS2535TVX
IC339	8-759-466-59	s	IC CGS2535TVX
IC340	8-759-456-26	s	IC 74LCX541MTCX
IC342	8-759-523-43	s	IC TC74ACT157FT(EL)
IC343	8-759-523-43	s	IC TC74ACT157FT(EL)
IC344	8-759-523-43	s	IC TC74ACT157FT(EL)
IC345	8-759-456-26	s	IC 74LCX541MTCX
IC346	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC347	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC348	8-759-456-26	s	IC 74LCX541MTCX
IC349	8-759-456-26	s	IC 74LCX541MTCX
IC350	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC351	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC352	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC353	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC355	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC356	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC357	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC358	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC359	8-759-295-88	s	IC HM530281RTT-20
IC360	8-759-295-88	s	IC HM530281RTT-20
IC363	8-759-439-42	s	IC CXD9022R
IC364	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC365	8-759-527-57	s	IC SN74ABT16823DGGR
IC366	8-759-527-57	s	IC SN74ABT16823DGGR
IC367	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC368	8-759-295-88	s	IC HM530281RTT-20
IC369	8-759-295-88	s	IC HM530281RTT-20
IC370	8-759-464-48	s	IC CXD8900J
IC371	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC372	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC373	8-759-466-59	s	IC CGS2535TVX
IC374	8-759-572-89	s	IC IDT74FCT162374ETPA-TL

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC375	8-759-386-27	s	IC 74LCX04MTCX
IC376	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC377	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC378	8-759-360-61	s	IC CXD8848AQ
IC379	8-759-360-61	s	IC CXD8848AQ
IC380	8-759-386-27	s	IC 74LCX04MTCX
IC381	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC382	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC383	8-759-295-88	s	IC HM530281RTT-20
IC384	8-759-295-88	s	IC HM530281RTT-20
IC385	8-759-466-58	s	IC CGS2534TVX
IC386	8-759-389-30	s	IC 74LCX32MTCX
IC387	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC388	8-759-527-57	s	IC SN74ABT16823DGGR
IC389	8-759-295-88	s	IC HM530281RTT-20
IC390	8-759-464-48	s	IC CXD8900J
IC391	8-759-464-48	s	IC CXD8900J
IC392	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC393	8-759-466-58	s	IC CGS2534TVX
IC394	8-759-295-88	s	IC HM530281RTT-20
IC395	8-759-295-88	s	IC HM530281RTT-20
IC396	8-759-527-57	s	IC SN74ABT16823DGGR
IC397	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC398	8-759-389-30	s	IC 74LCX32MTCX
IC399	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC400	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC401	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC402	8-759-295-88	s	IC HM530281RTT-20
IC403	8-759-523-39	s	IC TC74ACT32FT(EL)
IC404	8-759-386-27	s	IC 74LCX04MTCX
IC405	8-759-389-30	s	IC 74LCX32MTCX
IC406	8-759-466-59	s	IC CGS2535TVX
IC407	8-759-523-36	s	IC TC74ACT04FT(EL)
IC408	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC409	8-759-389-30	s	IC 74LCX32MTCX
IC410	8-759-386-27	s	IC 74LCX04MTCX
IC411	8-759-386-27	s	IC 74LCX04MTCX
IC412	8-759-295-88	s	IC HM530281RTT-20
IC413	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC414	8-759-360-61	s	IC CXD8848AQ
IC415	8-759-360-61	s	IC CXD8848AQ
IC416	8-759-464-48	s	IC CXD8900J
IC417	8-759-464-48	s	IC CXD8900J
IC418	8-759-464-48	s	IC CXD8900J
IC419	8-759-295-88	s	IC HM530281RTT-20
IC420	8-759-523-36	s	IC TC74ACT04FT(EL)
IC421	8-759-464-48	s	IC CXD8900J
IC422	8-759-464-48	s	IC CXD8900J
IC423	8-759-464-48	s	IC CXD8900J
IC424	8-759-464-48	s	IC CXD8900J
IC425	8-759-464-48	s	IC CXD8900J
IC426	8-759-464-48	s	IC CXD8900J
IC427	8-759-464-48	s	IC CXD8900J
IC500	8-759-464-48	s	IC CXD8900J
IC501	8-759-464-48	s	IC CXD8900J
IC502	8-759-464-46	s	IC CXD8899J
IC503	8-759-464-46	s	IC CXD8899J
IC504	8-759-464-46	s	IC CXD8899J
IC507	8-759-523-39	s	IC TC74ACT32FT(EL)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
IC508	8-759-523-39	s	IC TC74ACT32FT(EL)
IC509	8-759-523-37	s	IC TC74ACT08FT(EL)
IC510	8-759-523-35	s	IC TC74ACT02FT(EL)
IC511	8-759-464-48	s	IC CXD8900J
IC512	8-759-464-48	s	IC CXD8900J
IC513	8-759-527-57	s	IC SN74ABT16823DGGR
IC514	8-759-527-57	s	IC SN74ABT16823DGGR
IC515	8-759-527-57	s	IC SN74ABT16823DGGR
IC516	8-759-466-58	s	IC CGS2534TVX
IC517	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC518	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC519	8-759-527-57	s	IC SN74ABT16823DGGR
IC520	6-701-480-01	s	IC SN74ABT2244APW(R)
IC521	8-759-523-39	s	IC TC74ACT32FT(EL)
IC522	8-759-523-39	s	IC TC74ACT32FT(EL)
IC523	8-759-523-39	s	IC TC74ACT32FT(EL)
IC524	8-759-523-39	s	IC TC74ACT32FT(EL)
IC525	8-759-523-36	s	IC TC74ACT04FT(EL)
IC526	8-759-389-48	s	IC 74LCX16374MTDX
IC527	8-759-389-48	s	IC 74LCX16374MTDX
IS89	*a 1-540-151-21	s	SOCKET, IC
IS90	*a 1-540-151-21	s	SOCKET, IC
IS91	*a 1-540-151-21	s	SOCKET, IC
IS296	*a 1-540-151-21	s	SOCKET, IC
IS297	*a 1-540-151-21	s	SOCKET, IC
IS298	*a 1-540-151-21	s	SOCKET, IC
IS299	*a 1-540-151-21	s	SOCKET, IC
R1	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R2	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R3	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R4	1-216-699-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R8	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R9	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R10	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R11	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R12	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R15	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R16	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R17	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R18	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R20	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R21	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R23	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R24	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R25	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R27	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R28	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R31	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R33	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R34	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R35	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R37	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R38	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R40	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R44	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R45	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R47	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R49	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R50	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R53	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R54	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R55	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R56	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R60	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R61	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R62	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R63	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R65	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R66	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R67	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R68	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R70	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R71	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R72	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R73	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R74	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R75	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R76	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R77	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R79	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R80	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R83	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R84	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R85	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R86	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R87	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R89	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R90	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R93	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R94	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R95	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R97	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R99	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R100	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R101	1-216-655-11	s	RESISTOR,CHIP 1.5K 1/10W(2012)
R102	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R103	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R104	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R105	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R106	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R107	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R108	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R109	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R110	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R111	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R112	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R113	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R114	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R115	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R117	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R119	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R121	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R123	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R124	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R125	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R126	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R127	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R128	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R129	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R130	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R131	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R132	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R133	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R134	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R135	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R136	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R137	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R139	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R140	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R141	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R142	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R143	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R144	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R145	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R146	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R147	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R148	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R150	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R151	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R152	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R154	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R156	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R159	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R161	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R162	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R163	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R164	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R165	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R166	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R167	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R169	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R171	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R172	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R173	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R174	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R175	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R176	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R177	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R178	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R179	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R180	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R181	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R182	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R183	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R184	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R185	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R186	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R187	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R188	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R189	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R190	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R191	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R192	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R193	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R194	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R197	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R199	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R201	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R202	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R205	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R206	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R209	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R210	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R211	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R213	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R214	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R215	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R216	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R217	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R218	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R220	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R222	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R223	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R224	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R225	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R226	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R227	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R228	1-216-612-11	s	RESISTOR,CHIP 24 1/10W(2012)
R230	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R231	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R232	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R233	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R234	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R235	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R236	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R237	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R238	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R239	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R240	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R241	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R243	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R244	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R245	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R246	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R247	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R248	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R250	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R251	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R252	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R254	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R255	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R256	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R259	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R260	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R261	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R262	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R263	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R264	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R265	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R266	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R267	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R268	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R270	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R271	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R272	1-216-295-91	s	CONDUCTOR, CHIP (2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R273	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R274	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R275	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R276	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R277	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R278	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R280	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R281	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R283	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R285	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R288	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R289	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R292	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R294	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R295	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R297	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R298	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R299	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R300	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R301	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R305	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R308	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R309	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R311	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R312	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
R315	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R317	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R319	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R320	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R322	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R324	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R326	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R328	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R330	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R332	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R333	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R334	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R337	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R339	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R341	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R342	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R344	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R347	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R348	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R349	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R350	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R351	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R352	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R354	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R357	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R360	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R361	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R362	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R363	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R365	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R366	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R367	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R368	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R369	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R370	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R371	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R376	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R377	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R378	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R379	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R381	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R382	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R388	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R389	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R390	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R391	1-216-620-11	s	RESISTOR CHIP 51 1/10W (2012)
R392	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R393	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R394	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R395	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R396	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R398	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R399	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R400	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R402	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R403	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R404	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R405	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R406	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R408	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R409	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R410	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R411	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R412	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R413	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R414	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R415	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R416	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R418	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R419	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R420	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R423	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R424	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R425	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R426	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R427	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R428	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R429	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R430	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R431	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R432	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R435	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R436	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R437	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R438	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R440	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R442	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R443	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R444	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R445	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R447	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R448	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R449	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R451	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R452	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R454	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R456	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R457	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R458	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R459	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R460	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R463	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R465	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R466	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R468	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R469	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R470	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R473	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R475	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R476	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R478	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R479	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R480	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R481	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R482	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R483	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R484	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R485	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R486	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R487	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R488	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R489	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R492	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R493	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R495	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R496	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R497	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R498	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R500	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R501	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R503	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R504	1-218-776-11	s	RESISTOR CHIP 1M 1/10W (2012)
R506	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R508	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R510	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R512	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R513	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R515	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R517	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R520	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R522	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R900	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1600	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1601	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1602	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1603	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1604	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1605	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1606	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R1607	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R1608	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R1609	1-216-295-91	s	CONDUCTOR, CHIP (2012)

(MY-65 BOARD (HKDS-7041))

Ref. No. or Q'ty	Part No.	SP	Description
R1610	1-216-295-91	s	CONDUCTOR, CHIP (2012)
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB16	1-234-078-11	s	RES, CHIP NETWORK 47
RB17	1-234-078-11	s	RES, CHIP NETWORK 47
RB18	1-234-078-11	s	RES, CHIP NETWORK 47
RB19	1-234-078-11	s	RES, CHIP NETWORK 47
RB20	1-234-078-11	s	RES, CHIP NETWORK 47
RB21	1-234-078-11	s	RES, CHIP NETWORK 47
RB22	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB23	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB24	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB25	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB26	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB27	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB28	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB29	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB30	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB31	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB32	1-234-077-11	s	RES, CHIP NETWORK 68
RB33	1-234-077-11	s	RES, CHIP NETWORK 68
RB34	1-234-077-11	s	RES, CHIP NETWORK 68
RB35	1-234-077-11	s	RES, CHIP NETWORK 68
RB36	1-234-077-11	s	RES, CHIP NETWORK 68
RB37	1-234-077-11	s	RES, CHIP NETWORK 68
RB38	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB39	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB40	1-234-077-11	s	RES, CHIP NETWORK 68
RB41	1-234-077-11	s	RES, CHIP NETWORK 68
RB42	1-234-077-11	s	RES, CHIP NETWORK 68
RB43	1-234-077-11	s	RES, CHIP NETWORK 68
RB50	1-234-077-11	s	RES, CHIP NETWORK 68
RB51	1-234-077-11	s	RES, CHIP NETWORK 68
RB52	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB53	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB54	1-234-077-11	s	RES, CHIP NETWORK 68
RB55	1-234-077-11	s	RES, CHIP NETWORK 68
RB56	1-234-077-11	s	RES, CHIP NETWORK 68
RB57	1-234-077-11	s	RES, CHIP NETWORK 68
RB58	1-234-077-11	s	RES, CHIP NETWORK 68
RB59	1-234-077-11	s	RES, CHIP NETWORK 68
RB60	1-234-077-11	s	RES, CHIP NETWORK 68
RB61	1-234-077-11	s	RES, CHIP NETWORK 68
RB62	1-234-077-11	s	RES, CHIP NETWORK 68
RB63	1-234-077-11	s	RES, CHIP NETWORK 68
RB64	1-234-077-11	s	RES, CHIP NETWORK 68
RB65	1-234-077-11	s	RES, CHIP NETWORK 68
RB66	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB67	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB68	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB69	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

OUT-7 BOARD
---

*a:[Lot No. 710 - 801]
*b:[Lot No. 802 -]
*c:[Lot No. 710 - 805]
*d:[Lot No. 806 -]
*e:[Lot No. 710 - 806]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-487-A	o	MOUNTED CIRCUIT BOARD, OUT-7
1pc	1-783-440-11	o	CABLE ASSY, COAXIAL(CLN)
1pc	1-783-441-11	o	CABLE ASSY, COAXIAL(1ME1)
1pc	1-783-442-12	o	CABLE ASSY, COAXIAL(1ME2)
1pc	1-783-443-11	o	CABLE ASSY, COAXIAL(2ME1)
1pc	1-783-444-11	o	CABLE ASSY, COAXIAL(2ME2)
1pc	1-783-445-11	o	CABLE ASSY, COAXIAL(PGM1)
1pc	1-783-446-11	o	CABLE ASSY, COAXIAL(PGM2)
1pc	1-783-447-11	o	CABLE ASSY, COAXIAL(PGM3)
1pc	1-783-448-11	o	CABLE ASSY, COAXIAL(PVW)
1pc	1-783-449-11	o	CABLE ASSY, COAXIAL(AX1)
1pc	1-783-450-11	o	CABLE ASSY, COAXIAL(AX2)
1pc	1-783-451-11	o	CABLE ASSY, COAXIAL(AX3)
1pc	1-783-452-11	o	CABLE ASSY, COAXIAL(AX4)
1pc	1-783-453-11	o	CABLE ASSY, COAXIAL(AX5)
1pc	1-783-454-11	o	CABLE ASSY, COAXIAL(AX6)
1pc	1-783-455-11	o	CABLE ASSY, COAXIAL(AX7)
1pc	1-783-456-11	o	CABLE ASSY, COAXIAL(AX8)
1pc	1-783-457-11	o	CABLE ASSY, COAXIAL(AX9)
1pc	1-783-458-11	o	CABLE ASSY, COAXIAL(AX10)
45pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
2pcs	3-194-878-01	s	LEVER, PC BOARD
8pcs	3-683-631-01	o	CLAMP
14pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
2pcs	7-626-320-11	s	PIN, SPRING 3x8
45pcs	7-682-547-04	s	SCREW +B 3x6
C1	1-125-783-11	s	ELECT 820uF 20% 4V
C2	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C3	1-128-401-11	s	ELECT 100uF 20% 25V
C4	1-125-783-11	s	ELECT 820uF 20% 4V
C5	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C6	1-163-257-11	s	CERAMIC, CHIP 180pF 5% 50V
C7	1-164-346-11	s	CERAMIC 1uF 16V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-117-372-11	s	TANTALUM 100uF 20% 10V
C10	1-125-783-11	s	ELECT 820uF 20% 4V
C11	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C12	1-128-401-11	s	ELECT 100uF 20% 25V
C13	1-128-401-11	s	ELECT 100uF 20% 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C16	1-117-372-11	s	TANTALUM 100uF 20% 10V
C17	1-128-401-11	s	ELECT 100uF 20% 25V
C18	1-117-372-11	s	TANTALUM 100uF 20% 10V
C20	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C21	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C22	1-125-783-11	s	ELECT 820uF 20% 4V
C23	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C24	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C25	1-164-346-11	s	CERAMIC 1uF 16V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C27	1-125-783-11	s	ELECT 820uF 20% 4V
C28	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C29	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C30	1-164-346-11	s	CERAMIC 1uF 16V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C33	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C34	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C35	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C48	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V
C58	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-038-00	s	CERAMIC 0.1uF 25V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-038-00	s	CERAMIC 0.1uF 25V
C279	1-163-038-00	s	CERAMIC 0.1uF 25V
C280	1-163-038-00	s	CERAMIC 0.1uF 25V
C281	1-163-038-00	s	CERAMIC 0.1uF 25V
C282	1-163-038-00	s	CERAMIC 0.1uF 25V
C283	1-163-038-00	s	CERAMIC 0.1uF 25V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-038-00	s	CERAMIC 0.1uF 25V
C292	1-163-038-00	s	CERAMIC 0.1uF 25V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-038-00	s	CERAMIC 0.1uF 25V
C296	1-163-038-00	s	CERAMIC 0.1uF 25V
C297	1-163-038-00	s	CERAMIC 0.1uF 25V
C298	1-163-038-00	s	CERAMIC 0.1uF 25V
C299	1-163-038-00	s	CERAMIC 0.1uF 25V
C430	1-163-038-00	s	CERAMIC 0.1uF 25V
C431	1-163-038-00	s	CERAMIC 0.1uF 25V
C432	1-163-038-00	s	CERAMIC 0.1uF 25V
C433	1-163-038-00	s	CERAMIC 0.1uF 25V
C434	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C435	1-163-038-00	s	CERAMIC 0.1uF 25V
C436	1-163-038-00	s	CERAMIC 0.1uF 25V
C437	1-163-038-00	s	CERAMIC 0.1uF 25V
C438	1-163-038-00	s	CERAMIC 0.1uF 25V
C439	1-163-038-00	s	CERAMIC 0.1uF 25V
C440	1-163-038-00	s	CERAMIC 0.1uF 25V
C441	1-163-038-00	s	CERAMIC 0.1uF 25V
C442	1-163-038-00	s	CERAMIC 0.1uF 25V
C443	1-163-038-00	s	CERAMIC 0.1uF 25V
C444	1-163-038-00	s	CERAMIC 0.1uF 25V
C445	1-163-038-00	s	CERAMIC 0.1uF 25V
C446	1-163-038-00	s	CERAMIC 0.1uF 25V
C447	1-163-038-00	s	CERAMIC 0.1uF 25V
C448	1-163-038-00	s	CERAMIC 0.1uF 25V
C449	1-163-038-00	s	CERAMIC 0.1uF 25V
C450	1-163-038-00	s	CERAMIC 0.1uF 25V
C451	1-163-038-00	s	CERAMIC 0.1uF 25V
C452	1-163-038-00	s	CERAMIC 0.1uF 25V
C453	1-163-038-00	s	CERAMIC 0.1uF 25V
C500	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C501	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C502	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C503	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C504	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C505	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C506	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C507	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C508	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C509	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C510	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C511	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C512	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C513	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C514	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C515	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C527	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C528	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C529	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C530	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C531	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C532	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C533	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C534	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C535	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C536	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C537	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C538	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C539	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C540	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C541	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C542	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C543	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C544	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C545	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C546	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C547	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C548	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C549	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C550	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C551	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C552	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C553	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C554	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C555	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C556	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C557	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C558	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C559	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C560	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C561	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C562	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C563	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C564	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C565	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C566	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C567	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C568	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C569	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C570	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C571	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C572	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C574	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C575	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C576	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C577	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C578	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C591	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C592	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C593	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C594	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C595	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C596	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C597	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C598	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C599	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C600	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C601	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C602	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C603	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C604	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C605	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C606	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C615	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C616	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C617	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C618	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C619	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C620	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C621	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C622	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C623	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C624	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C625	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C626	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C631	1-163-038-00	s	CERAMIC 0.1uF 25V
C632	1-163-038-00	s	CERAMIC 0.1uF 25V
C633	1-163-038-00	s	CERAMIC 0.1uF 25V
C634	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C635	1-163-038-00	s	CERAMIC 0.1uF 25V
C636	1-163-038-00	s	CERAMIC 0.1uF 25V
C637	1-163-038-00	s	CERAMIC 0.1uF 25V
C638	1-163-038-00	s	CERAMIC 0.1uF 25V
C639	1-163-038-00	s	CERAMIC 0.1uF 25V
C640	1-163-038-00	s	CERAMIC 0.1uF 25V
C641	1-163-038-00	s	CERAMIC 0.1uF 25V
C642	1-163-038-00	s	CERAMIC 0.1uF 25V
C643	1-163-038-00	s	CERAMIC 0.1uF 25V
C644	1-163-038-00	s	CERAMIC 0.1uF 25V
C645	1-163-038-00	s	CERAMIC 0.1uF 25V
C646	1-163-038-00	s	CERAMIC 0.1uF 25V
C647	1-163-038-00	s	CERAMIC 0.1uF 25V
C648	1-163-038-00	s	CERAMIC 0.1uF 25V
C649	1-163-038-00	s	CERAMIC 0.1uF 25V
C650	1-163-038-00	s	CERAMIC 0.1uF 25V
C651	1-163-038-00	s	CERAMIC 0.1uF 25V
C652	1-163-038-00	s	CERAMIC 0.1uF 25V
C653	1-163-038-00	s	CERAMIC 0.1uF 25V
C654	1-163-038-00	s	CERAMIC 0.1uF 25V
C655	1-163-038-00	s	CERAMIC 0.1uF 25V
C656	1-163-038-00	s	CERAMIC 0.1uF 25V
C657	1-163-038-00	s	CERAMIC 0.1uF 25V
C658	1-163-038-00	s	CERAMIC 0.1uF 25V
C659	1-163-038-00	s	CERAMIC 0.1uF 25V
C660	1-163-038-00	s	CERAMIC 0.1uF 25V
C661	1-163-038-00	s	CERAMIC 0.1uF 25V
C662	1-163-038-00	s	CERAMIC 0.1uF 25V
C663	1-163-038-00	s	CERAMIC 0.1uF 25V
C664	1-163-038-00	s	CERAMIC 0.1uF 25V
C665	1-163-038-00	s	CERAMIC 0.1uF 25V
C666	1-163-038-00	s	CERAMIC 0.1uF 25V
C667	1-163-038-00	s	CERAMIC 0.1uF 25V
C668	1-163-038-00	s	CERAMIC 0.1uF 25V
C669	1-163-038-00	s	CERAMIC 0.1uF 25V
C670	1-163-038-00	s	CERAMIC 0.1uF 25V
C671	1-163-038-00	s	CERAMIC 0.1uF 25V
C672	1-163-038-00	s	CERAMIC 0.1uF 25V
C673	1-163-038-00	s	CERAMIC 0.1uF 25V
C674	1-163-038-00	s	CERAMIC 0.1uF 25V
C675	1-163-038-00	s	CERAMIC 0.1uF 25V
C676	1-163-038-00	s	CERAMIC 0.1uF 25V
C677	1-163-038-00	s	CERAMIC 0.1uF 25V
C678	1-163-038-00	s	CERAMIC 0.1uF 25V
C679	1-163-038-00	s	CERAMIC 0.1uF 25V
C680	1-163-038-00	s	CERAMIC 0.1uF 25V
C681	1-163-038-00	s	CERAMIC 0.1uF 25V
C682	1-163-038-00	s	CERAMIC 0.1uF 25V
C683	1-163-038-00	s	CERAMIC 0.1uF 25V
C684	1-163-038-00	s	CERAMIC 0.1uF 25V
C685	1-163-038-00	s	CERAMIC 0.1uF 25V
C686	1-163-038-00	s	CERAMIC 0.1uF 25V
C687	1-163-038-00	s	CERAMIC 0.1uF 25V
C688	1-163-038-00	s	CERAMIC 0.1uF 25V
C689	1-163-038-00	s	CERAMIC 0.1uF 25V
C690	1-163-038-00	s	CERAMIC 0.1uF 25V
C691	1-163-038-00	s	CERAMIC 0.1uF 25V
C692	1-163-038-00	s	CERAMIC 0.1uF 25V
C693	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C694	1-163-038-00	s	CERAMIC 0.1uF 25V
C695	1-163-038-00	s	CERAMIC 0.1uF 25V
C696	1-163-038-00	s	CERAMIC 0.1uF 25V
C697	1-163-038-00	s	CERAMIC 0.1uF 25V
C698	1-163-038-00	s	CERAMIC 0.1uF 25V
C699	1-163-038-00	s	CERAMIC 0.1uF 25V
C700	1-163-038-00	s	CERAMIC 0.1uF 25V
C701	1-163-038-00	s	CERAMIC 0.1uF 25V
C702	1-163-038-00	s	CERAMIC 0.1uF 25V
C703	1-163-038-00	s	CERAMIC 0.1uF 25V
C704	1-163-038-00	s	CERAMIC 0.1uF 25V
C705	1-163-038-00	s	CERAMIC 0.1uF 25V
C706	1-163-038-00	s	CERAMIC 0.1uF 25V
C707	1-163-038-00	s	CERAMIC 0.1uF 25V
C708	1-163-038-00	s	CERAMIC 0.1uF 25V
C709	1-163-038-00	s	CERAMIC 0.1uF 25V
C710	1-163-038-00	s	CERAMIC 0.1uF 25V
C711	1-163-038-00	s	CERAMIC 0.1uF 25V
C712	1-163-038-00	s	CERAMIC 0.1uF 25V
C713	1-163-038-00	s	CERAMIC 0.1uF 25V
C714	1-163-038-00	s	CERAMIC 0.1uF 25V
C715	1-163-038-00	s	CERAMIC 0.1uF 25V
C716	1-163-038-00	s	CERAMIC 0.1uF 25V
C717	1-163-038-00	s	CERAMIC 0.1uF 25V
C718	1-163-038-00	s	CERAMIC 0.1uF 25V
C719	1-163-038-00	s	CERAMIC 0.1uF 25V
C720	1-163-038-00	s	CERAMIC 0.1uF 25V
C721	1-163-038-00	s	CERAMIC 0.1uF 25V
C722	1-163-038-00	s	CERAMIC 0.1uF 25V
C723	1-163-038-00	s	CERAMIC 0.1uF 25V
C724	1-163-038-00	s	CERAMIC 0.1uF 25V
C725	1-163-038-00	s	CERAMIC 0.1uF 25V
C726	1-163-038-00	s	CERAMIC 0.1uF 25V
C727	1-163-038-00	s	CERAMIC 0.1uF 25V
C728	1-163-038-00	s	CERAMIC 0.1uF 25V
C729	1-163-038-00	s	CERAMIC 0.1uF 25V
C730	1-163-038-00	s	CERAMIC 0.1uF 25V
C731	1-163-038-00	s	CERAMIC 0.1uF 25V
C732	1-163-038-00	s	CERAMIC 0.1uF 25V
C733	1-163-038-00	s	CERAMIC 0.1uF 25V
C734	1-163-038-00	s	CERAMIC 0.1uF 25V
C735	1-163-038-00	s	CERAMIC 0.1uF 25V
C736	1-163-038-00	s	CERAMIC 0.1uF 25V
C737	1-163-038-00	s	CERAMIC 0.1uF 25V
C738	1-163-038-00	s	CERAMIC 0.1uF 25V
C739	1-163-038-00	s	CERAMIC 0.1uF 25V
C740	1-163-038-00	s	CERAMIC 0.1uF 25V
C741	1-163-038-00	s	CERAMIC 0.1uF 25V
C742	1-163-038-00	s	CERAMIC 0.1uF 25V
C743	1-163-038-00	s	CERAMIC 0.1uF 25V
C744	1-163-038-00	s	CERAMIC 0.1uF 25V
C745	1-163-038-00	s	CERAMIC 0.1uF 25V
C746	1-163-038-00	s	CERAMIC 0.1uF 25V
C747	1-163-038-00	s	CERAMIC 0.1uF 25V
C748	1-163-038-00	s	CERAMIC 0.1uF 25V
C749	1-163-038-00	s	CERAMIC 0.1uF 25V
C750	1-163-038-00	s	CERAMIC 0.1uF 25V
C751	1-163-038-00	s	CERAMIC 0.1uF 25V
C752	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C753	1-163-038-00	s	CERAMIC 0.1uF 25V
C754	1-163-038-00	s	CERAMIC 0.1uF 25V
C755	1-163-038-00	s	CERAMIC 0.1uF 25V
C756	1-163-038-00	s	CERAMIC 0.1uF 25V
C757	1-163-038-00	s	CERAMIC 0.1uF 25V
C758	1-163-038-00	s	CERAMIC 0.1uF 25V
C759	1-163-038-00	s	CERAMIC 0.1uF 25V
C760	1-163-038-00	s	CERAMIC 0.1uF 25V
C761	1-163-038-00	s	CERAMIC 0.1uF 25V
C762	1-163-038-00	s	CERAMIC 0.1uF 25V
C763	1-163-038-00	s	CERAMIC 0.1uF 25V
C764	1-163-038-00	s	CERAMIC 0.1uF 25V
C765	1-163-038-00	s	CERAMIC 0.1uF 25V
C766	1-163-038-00	s	CERAMIC 0.1uF 25V
C767	1-163-038-00	s	CERAMIC 0.1uF 25V
C768	1-163-038-00	s	CERAMIC 0.1uF 25V
C769	1-163-038-00	s	CERAMIC 0.1uF 25V
C770	1-163-038-00	s	CERAMIC 0.1uF 25V
C771	1-163-038-00	s	CERAMIC 0.1uF 25V
C772	1-163-038-00	s	CERAMIC 0.1uF 25V
C773	1-163-038-00	s	CERAMIC 0.1uF 25V
C774	1-163-038-00	s	CERAMIC 0.1uF 25V
C775	1-163-038-00	s	CERAMIC 0.1uF 25V
C776	1-163-038-00	s	CERAMIC 0.1uF 25V
C777	1-163-038-00	s	CERAMIC 0.1uF 25V
C778	1-163-038-00	s	CERAMIC 0.1uF 25V
C779	1-163-038-00	s	CERAMIC 0.1uF 25V
C780	1-163-038-00	s	CERAMIC 0.1uF 25V
C781	1-163-038-00	s	CERAMIC 0.1uF 25V
C782	1-163-038-00	s	CERAMIC 0.1uF 25V
C783	1-163-038-00	s	CERAMIC 0.1uF 25V
C784	1-163-038-00	s	CERAMIC 0.1uF 25V
C785	1-163-038-00	s	CERAMIC 0.1uF 25V
C786	1-163-038-00	s	CERAMIC 0.1uF 25V
C787	1-163-038-00	s	CERAMIC 0.1uF 25V
C788	1-163-038-00	s	CERAMIC 0.1uF 25V
C789	1-163-038-00	s	CERAMIC 0.1uF 25V
C790	1-163-038-00	s	CERAMIC 0.1uF 25V
C791	1-163-038-00	s	CERAMIC 0.1uF 25V
C792	1-163-038-00	s	CERAMIC 0.1uF 25V
C793	1-163-038-00	s	CERAMIC 0.1uF 25V
C794	1-163-038-00	s	CERAMIC 0.1uF 25V
C795	1-163-038-00	s	CERAMIC 0.1uF 25V
C796	1-163-038-00	s	CERAMIC 0.1uF 25V
C797	1-163-038-00	s	CERAMIC 0.1uF 25V
C798	1-163-038-00	s	CERAMIC 0.1uF 25V
C799	1-163-038-00	s	CERAMIC 0.1uF 25V
C800	1-163-038-00	s	CERAMIC 0.1uF 25V
C801	1-163-038-00	s	CERAMIC 0.1uF 25V
C802	1-163-038-00	s	CERAMIC 0.1uF 25V
C803	1-163-038-00	s	CERAMIC 0.1uF 25V
C804	1-163-038-00	s	CERAMIC 0.1uF 25V
C805	1-163-038-00	s	CERAMIC 0.1uF 25V
C806	1-163-038-00	s	CERAMIC 0.1uF 25V
C807	1-163-038-00	s	CERAMIC 0.1uF 25V
C808	1-163-038-00	s	CERAMIC 0.1uF 25V
C809	1-163-038-00	s	CERAMIC 0.1uF 25V
C810	1-163-038-00	s	CERAMIC 0.1uF 25V
C811	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C812	1-163-038-00	s	CERAMIC 0.1uF 25V
C813	1-163-038-00	s	CERAMIC 0.1uF 25V
C814	1-163-038-00	s	CERAMIC 0.1uF 25V
C815	1-163-038-00	s	CERAMIC 0.1uF 25V
C816	1-163-038-00	s	CERAMIC 0.1uF 25V
C817	1-163-038-00	s	CERAMIC 0.1uF 25V
C818	1-163-038-00	s	CERAMIC 0.1uF 25V
C819	1-163-038-00	s	CERAMIC 0.1uF 25V
C820	1-163-038-00	s	CERAMIC 0.1uF 25V
C821	1-163-038-00	s	CERAMIC 0.1uF 25V
C822	1-163-038-00	s	CERAMIC 0.1uF 25V
C823	1-163-038-00	s	CERAMIC 0.1uF 25V
C824	1-163-038-00	s	CERAMIC 0.1uF 25V
C825	1-163-038-00	s	CERAMIC 0.1uF 25V
C826	1-163-038-00	s	CERAMIC 0.1uF 25V
C827	1-163-038-00	s	CERAMIC 0.1uF 25V
C828	1-163-038-00	s	CERAMIC 0.1uF 25V
C829	1-163-038-00	s	CERAMIC 0.1uF 25V
C830	1-163-038-00	s	CERAMIC 0.1uF 25V
C831	1-163-038-00	s	CERAMIC 0.1uF 25V
C832	1-163-038-00	s	CERAMIC 0.1uF 25V
C833	1-163-038-00	s	CERAMIC 0.1uF 25V
C834	1-163-038-00	s	CERAMIC 0.1uF 25V
C835	1-163-038-00	s	CERAMIC 0.1uF 25V
C836	1-163-038-00	s	CERAMIC 0.1uF 25V
C837	1-163-038-00	s	CERAMIC 0.1uF 25V
C838	1-163-038-00	s	CERAMIC 0.1uF 25V
C839	1-163-038-00	s	CERAMIC 0.1uF 25V
C840	1-163-038-00	s	CERAMIC 0.1uF 25V
C841	1-163-038-00	s	CERAMIC 0.1uF 25V
C842	1-163-038-00	s	CERAMIC 0.1uF 25V
C843	1-163-038-00	s	CERAMIC 0.1uF 25V
C844	1-163-038-00	s	CERAMIC 0.1uF 25V
C845	1-163-038-00	s	CERAMIC 0.1uF 25V
C846	1-163-038-00	s	CERAMIC 0.1uF 25V
C847	1-163-038-00	s	CERAMIC 0.1uF 25V
C848	1-163-038-00	s	CERAMIC 0.1uF 25V
C849	1-163-038-00	s	CERAMIC 0.1uF 25V
C850	1-163-038-00	s	CERAMIC 0.1uF 25V
C851	1-163-038-00	s	CERAMIC 0.1uF 25V
C852	1-163-038-00	s	CERAMIC 0.1uF 25V
C853	1-163-038-00	s	CERAMIC 0.1uF 25V
C854	1-163-038-00	s	CERAMIC 0.1uF 25V
C855	1-163-038-00	s	CERAMIC 0.1uF 25V
C856	1-163-038-00	s	CERAMIC 0.1uF 25V
C857	1-163-038-00	s	CERAMIC 0.1uF 25V
C858	1-163-038-00	s	CERAMIC 0.1uF 25V
C859	1-163-038-00	s	CERAMIC 0.1uF 25V
C860	1-163-038-00	s	CERAMIC 0.1uF 25V
C862	1-163-038-00	s	CERAMIC 0.1uF 25V
C863	1-163-038-00	s	CERAMIC 0.1uF 25V
C864	1-163-038-00	s	CERAMIC 0.1uF 25V
C865	1-163-038-00	s	CERAMIC 0.1uF 25V
C866	1-163-038-00	s	CERAMIC 0.1uF 25V
C867	1-163-038-00	s	CERAMIC 0.1uF 25V
C868	1-163-038-00	s	CERAMIC 0.1uF 25V
C869	1-163-038-00	s	CERAMIC 0.1uF 25V
C870	1-163-038-00	s	CERAMIC 0.1uF 25V
C871	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C872	1-163-038-00	s	CERAMIC 0.1uF 25V
C873	1-163-038-00	s	CERAMIC 0.1uF 25V
C1000	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1001	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1002	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1919	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1920	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1921	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C2006	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C2200	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2201	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2202	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2203	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2204	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2205	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2206	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2207	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2208	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2212	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2213	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2214	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2215	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2216	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2217	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2500	1-163-038-00	s	CERAMIC 0.1uF 25V
C3000	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
CN2	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN3	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN4	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN5	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN6	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN7	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN8	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN9	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN10	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN11	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN12	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN13	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN14	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN15	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN16	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN50	1-560-759-00	o	CONNECTOR, RIGHT ANGLE 10P, MALE
D1	8-719-048-17	s	DIODE MBRS130LT3
D2	8-719-048-17	s	DIODE MBRS130LT3
D3	8-719-048-17	s	DIODE MBRS130LT3
D4	8-719-048-17	s	DIODE MBRS130LT3
D5	8-719-048-17	s	DIODE MBRS130LT3
D6	8-719-048-17	s	DIODE MBRS130LT3
D7	8-719-975-84	s	DIODE AY1101W-88
D8	8-719-975-84	s	DIODE AY1101W-88
D9	8-719-975-84	s	DIODE AY1101W-88
D10	8-719-975-84	s	DIODE AY1101W-88

(OUT-7 BOARD)

Ref. No. or Q'ty		Part No.	SP	Description
F1	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F2	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F3	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F4	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F5	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F6	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F20	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F21	*d ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
	*c ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
FB1		1-543-256-11	s	BEAD, FERRITE
FB2		1-543-256-11	s	BEAD, FERRITE
IC1		8-759-466-60	s	IC LTC1266CS-E2
IC6		8-759-466-60	s	IC LTC1266CS-E2
IC7		8-759-466-60	s	IC LTC1266CS-E2
IC10		8-759-466-21	s	IC S4405B-80
IC11		8-759-465-49	s	IC MC10ELT21DR2
IC13		8-759-386-26	s	IC 74LCX574MTCX
IC14		8-759-386-26	s	IC 74LCX574MTCX
IC15		8-759-386-27	s	IC 74LCX04MTCX
IC16		8-759-386-26	s	IC 74LCX574MTCX
IC17		8-759-271-82	s	IC DS3695ATM
IC18		8-759-464-46	s	IC CXD8899J
IC19		8-759-386-26	s	IC 74LCX574MTCX
IC20		8-759-386-26	s	IC 74LCX574MTCX
IC21		8-759-464-46	s	IC CXD8899J
IC22	*b	8-759-464-48	s	IC CXD8900J
IC23		8-759-464-46	s	IC CXD8899J
IC24		8-759-464-46	s	IC CXD8899J
IC25	*b	8-759-464-48	s	IC CXD8900J
IC26		8-759-386-27	s	IC 74LCX04MTCX
IC27		8-759-271-78	s	IC DS26C32ATM
IC28		8-759-386-26	s	IC 74LCX574MTCX
IC29		8-759-542-61	s	IC EPM7128-TXINIT-V1
IC30		8-759-386-27	s	IC 74LCX04MTCX
IC31		8-759-386-26	s	IC 74LCX574MTCX
IC32		8-759-386-26	s	IC 74LCX574MTCX
IC33	*b	8-759-464-48	s	IC CXD8900J
IC34	*b	8-759-464-48	s	IC CXD8900J
IC35	*b	8-759-464-48	s	IC CXD8900J
IC36		8-759-469-98	s	IC CAT93C66K-LE10
IC37	*b	8-759-464-48	s	IC CXD8900J
IC38		8-759-464-46	s	IC CXD8899J
IC39		8-759-386-26	s	IC 74LCX574MTCX
IC40		8-759-464-46	s	IC CXD8899J
IC41		8-759-523-51	s	IC TC74ACT574FT(EL)
IC42		8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC43		8-759-505-00	s	IC CXD8052Q
IC46		8-759-466-59	s	IC CGS2535TVX
IC47		8-759-466-59	s	IC CGS2535TVX
IC48	*b	8-759-464-48	s	IC CXD8900J
IC49	*b	8-759-464-48	s	IC CXD8900J
IC50	*b	8-759-464-48	s	IC CXD8900J

(OUT-7 BOARD)

Ref. No. or Q'ty		Part No.	SP	Description
IC51	*b	8-759-464-48	s	IC CXD8900J
IC52	*b	8-759-464-48	s	IC CXD8900J
IC53	*b	8-759-464-48	s	IC CXD8900J
IC54	*b	8-759-464-48	s	IC CXD8900J
IC55	*b	8-759-464-48	s	IC CXD8900J
IC56	*b	8-759-464-48	s	IC CXD8900J
IC57	*b	8-759-464-48	s	IC CXD8900J
IC58	*b	8-759-464-48	s	IC CXD8900J
IC59	*b	8-759-464-48	s	IC CXD8900J
IC60		8-759-464-46	s	IC CXD8899J
IC61		8-759-464-46	s	IC CXD8899J
IC62		8-759-464-46	s	IC CXD8899J
IC63		8-759-464-46	s	IC CXD8899J
IC64		8-759-464-46	s	IC CXD8899J
IC65		8-759-464-46	s	IC CXD8899J
IC66		8-759-464-46	s	IC CXD8899J
IC67		8-759-464-46	s	IC CXD8899J
IC68		8-759-464-46	s	IC CXD8899J
IC69		8-759-464-46	s	IC CXD8899J
IC70		8-759-464-46	s	IC CXD8899J
IC71		8-759-464-46	s	IC CXD8899J
IC72		8-759-386-26	s	IC 74LCX574MTCX
IC73		8-759-386-27	s	IC 74LCX04MTCX
IC74		8-759-386-26	s	IC 74LCX574MTCX
IC75		8-759-386-26	s	IC 74LCX574MTCX
IC76		8-759-386-26	s	IC 74LCX574MTCX
IC77		8-759-386-27	s	IC 74LCX04MTCX
IC78		8-759-386-26	s	IC 74LCX574MTCX
IC79		8-759-386-26	s	IC 74LCX574MTCX
IC80		8-759-386-26	s	IC 74LCX574MTCX
IC81		8-759-386-27	s	IC 74LCX04MTCX
IC82		8-759-386-26	s	IC 74LCX574MTCX
IC83		8-759-386-26	s	IC 74LCX574MTCX
IC84		8-759-386-26	s	IC 74LCX574MTCX
IC85		8-759-386-27	s	IC 74LCX04MTCX
IC86		8-759-386-26	s	IC 74LCX574MTCX
IC87		8-759-386-26	s	IC 74LCX574MTCX
IC88		8-759-386-26	s	IC 74LCX574MTCX
IC89		8-759-386-27	s	IC 74LCX04MTCX
IC90		8-759-386-26	s	IC 74LCX574MTCX
IC91		8-759-386-26	s	IC 74LCX574MTCX
IC92		8-759-386-26	s	IC 74LCX574MTCX
IC93		8-759-386-27	s	IC 74LCX04MTCX
IC94		8-759-386-26	s	IC 74LCX574MTCX
IC95		8-759-386-26	s	IC 74LCX574MTCX
IC96		8-759-523-49	s	IC TC74ACT541FT(EL)
IC97		8-759-523-49	s	IC TC74ACT541FT(EL)
IC99		8-759-523-49	s	IC TC74ACT541FT(EL)
IC100	*b	8-759-464-48	s	IC CXD8900J
IC101	*b	8-759-464-48	s	IC CXD8900J
IC102	*b	8-759-464-48	s	IC CXD8900J
IC103	*b	8-759-464-48	s	IC CXD8900J
IC104	*b	8-759-464-48	s	IC CXD8900J
IC105	*b	8-759-464-48	s	IC CXD8900J
IC106	*b	8-759-464-48	s	IC CXD8900J
IC107	*b	8-759-464-48	s	IC CXD8900J
IC108	*b	8-759-464-48	s	IC CXD8900J
IC109	*b	8-759-464-48	s	IC CXD8900J
IC110	*b	8-759-464-48	s	IC CXD8900J

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC111 *b	8-759-464-48	s	IC CXD8900J
IC112	8-759-464-46	s	IC CXD8899J
IC113	8-759-464-46	s	IC CXD8899J
IC114	8-759-464-46	s	IC CXD8899J
IC115	8-759-464-46	s	IC CXD8899J
IC116	8-759-464-46	s	IC CXD8899J
IC117	8-759-464-46	s	IC CXD8899J
IC118	8-759-464-46	s	IC CXD8899J
IC119	8-759-464-46	s	IC CXD8899J
IC120	8-759-464-46	s	IC CXD8899J
IC121	8-759-464-46	s	IC CXD8899J
IC122	8-759-464-46	s	IC CXD8899J
IC123	8-759-464-46	s	IC CXD8899J
IC124	8-759-386-26	s	IC 74LCX574MTCX
IC125	8-759-386-27	s	IC 74LCX04MTCX
IC126	8-759-386-26	s	IC 74LCX574MTCX
IC127	8-759-386-26	s	IC 74LCX574MTCX
IC128	8-759-386-26	s	IC 74LCX574MTCX
IC129	8-759-386-27	s	IC 74LCX04MTCX
IC130	8-759-386-26	s	IC 74LCX574MTCX
IC131	8-759-386-26	s	IC 74LCX574MTCX
IC132	8-759-386-26	s	IC 74LCX574MTCX
IC133	8-759-386-27	s	IC 74LCX04MTCX
IC134	8-759-386-26	s	IC 74LCX574MTCX
IC135	8-759-386-26	s	IC 74LCX574MTCX
IC136	8-759-386-26	s	IC 74LCX574MTCX
IC137	8-759-386-27	s	IC 74LCX04MTCX
IC138	8-759-386-26	s	IC 74LCX574MTCX
IC139	8-759-386-26	s	IC 74LCX574MTCX
IC140	8-759-386-26	s	IC 74LCX574MTCX
IC141	8-759-386-27	s	IC 74LCX04MTCX
IC142	8-759-386-26	s	IC 74LCX574MTCX
IC143	8-759-386-26	s	IC 74LCX574MTCX
IC144	8-759-386-26	s	IC 74LCX574MTCX
IC145	8-759-386-27	s	IC 74LCX04MTCX
IC146	8-759-386-26	s	IC 74LCX574MTCX
IC147	8-759-386-26	s	IC 74LCX574MTCX
IC300	8-759-389-45	s	IC 74LCX16244MTDX
IC301	8-759-389-45	s	IC 74LCX16244MTDX
IC302	8-759-389-45	s	IC 74LCX16244MTDX
IC303	8-759-389-45	s	IC 74LCX16244MTDX
IC305	8-759-389-45	s	IC 74LCX16244MTDX
IC508	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC509	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC510	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC511	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC512	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC513	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC514	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC515	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC521	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC528	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC536	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC538	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC543	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC545	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC553	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC555	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC560	8-759-528-53	s	IC IDT74FCT16374ETPA-TL

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC562	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC569	8-759-466-63	s	IC CXD8895Q
IC570	8-759-466-63	s	IC CXD8895Q
IC572	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC574	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC579	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC581	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC584	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC585	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC586	8-759-662-08	s	IC EPF10K40RC208-3(04)
IC587	8-759-577-23	o	IC EPC1-SAFE-V2
IC593	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC600	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC607	8-759-466-59	s	IC CGS2535TVX
IC608	8-759-466-59	s	IC CGS2535TVX
IC609	8-759-466-59	s	IC CGS2535TVX
IC610	8-759-466-59	s	IC CGS2535TVX
IC611	8-759-523-51	s	IC TC74ACT574FT(EL)
IC613	8-759-389-48	s	IC 74LCX16374MTDX
IC614	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC618	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC621 *b	8-759-464-48	s	IC CXD8900J
IC623 *b	8-759-464-48	s	IC CXD8900J
IC624	8-759-386-26	s	IC 74LCX574MTCX
IC626 *b	8-759-464-48	s	IC CXD8900J
IC628 *b	8-759-464-48	s	IC CXD8900J
IC634	8-759-448-56	s	IC TC74AC240F-EL
IC635	8-759-523-49	s	IC TC74ACT541FT(EL)
IC636	8-759-523-49	s	IC TC74ACT541FT(EL)
IC637	8-759-523-49	s	IC TC74ACT541FT(EL)
IC638	8-759-523-49	s	IC TC74ACT541FT(EL)
IC639	8-759-456-26	s	IC 74LCX541MTCX
IC640	8-759-456-26	s	IC 74LCX541MTCX
IC642	8-759-244-75	s	IC TC74AC541F
IC644	8-759-456-26	s	IC 74LCX541MTCX
IC645	8-759-456-26	s	IC 74LCX541MTCX
IC646	8-759-505-00	s	IC CXD8052Q
IC648	8-759-523-49	s	IC TC74ACT541FT(EL)
IC649	8-759-523-49	s	IC TC74ACT541FT(EL)
IC650	8-759-523-49	s	IC TC74ACT541FT(EL)
IC651	8-759-523-49	s	IC TC74ACT541FT(EL)
IC652	8-759-523-49	s	IC TC74ACT541FT(EL)
IC653	8-759-523-49	s	IC TC74ACT541FT(EL)
IC654	8-759-523-49	s	IC TC74ACT541FT(EL)
IC655	8-759-523-49	s	IC TC74ACT541FT(EL)
IC656	8-759-523-49	s	IC TC74ACT541FT(EL)
IC657	8-759-523-49	s	IC TC74ACT541FT(EL)
IC658	8-759-456-26	s	IC 74LCX541MTCX
IC659	8-759-456-26	s	IC 74LCX541MTCX
IC660	8-759-456-26	s	IC 74LCX541MTCX
IC661	8-759-456-26	s	IC 74LCX541MTCX
IC662	8-759-456-26	s	IC 74LCX541MTCX
IC663	8-759-456-26	s	IC 74LCX541MTCX
IC664	8-759-456-26	s	IC 74LCX541MTCX
IC665	8-759-456-26	s	IC 74LCX541MTCX
IC666	8-759-456-26	s	IC 74LCX541MTCX
IC667	8-759-456-26	s	IC 74LCX541MTCX
IC700	8-759-466-59	s	IC CGS2535TVX
IC701	8-759-466-59	s	IC CGS2535TVX

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC702	8-759-468-08	s	IC 74LVX3L384QSCX
IC703	8-759-468-08	s	IC 74LVX3L384QSCX
IC706	8-759-456-26	s	IC 74LCX541MTCX
IC707	8-759-523-34	s	IC TC74ACT00FT(EL)
IC708	8-759-523-39	s	IC TC74ACT32FT(EL)
IC800	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC3000	8-759-456-26	s	IC 74LCX541MTCX
IC3001 *b	8-759-464-48	s	IC CXD8900J
IC3002	8-759-389-26	s	IC 74LCX08MTCX
IS29 *d	1-251-272-11	o	SOCKET, IC 84P
*c	1-251-353-11	o	SOCKET, IC 84P
IS587 *d	1-251-093-11	o	SOCKET, IC 20P
*c	1-251-421-11	o	SOCKET, IC 20P
L4	1-469-060-11	s	INDUCTOR 6.1uH
L5	1-469-060-11	s	INDUCTOR 6.1uH
L6	1-469-060-11	s	INDUCTOR 6.1uH
Q1	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q2	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q3	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q4	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q5	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q6	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
R1	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R2	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R3	1-216-688-11	s	METAL, CHIP 36k 0.5% 1/10W
R4	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W
R5	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R6	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R7	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R8	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R9	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R10	1-218-756-11	s	METAL 150k 0.5% 1/10W
R11	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R12	1-218-756-11	s	METAL 150k 0.5% 1/10W
R13	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R14	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R15	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R16	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R17	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R18	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R25	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R26	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R27	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R28	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R30	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R31	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R39	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R52	1-216-295-91	s	RES, CHIP 0
R53	1-216-295-91	s	RES, CHIP 0
R54	1-216-295-91	s	RES, CHIP 0
R55	1-216-295-91	s	RES, CHIP 0
R56	1-216-295-91	s	RES, CHIP 0
R57	1-216-295-91	s	RES, CHIP 0
R58	1-216-295-91	s	RES, CHIP 0
R59	1-216-295-91	s	RES, CHIP 0
R64	1-216-295-91	s	RES, CHIP 0
R65	1-216-295-91	s	RES, CHIP 0

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R66	1-216-295-91	s	RES, CHIP 0
R67	1-216-295-91	s	RES, CHIP 0
R68	1-216-295-91	s	RES, CHIP 0
R69	1-216-295-91	s	RES, CHIP 0
R70	1-216-295-91	s	RES, CHIP 0
R79	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R80	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R81	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R82	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R84	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R93	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R94	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R95	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R96	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R97	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R98	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R99	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R100	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R101	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R506	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R507	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R510	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R511	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R512	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R513	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R514	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R515	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R516	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R517	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R518	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R519	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R520	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R521	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R522	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R523	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R524	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R525	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R564	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R565	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R566	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R567	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R568	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R569	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R570	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R571	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R572	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R573	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R574	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R575	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R576	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R577	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R578	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R595	1-216-295-91	s	RES, CHIP 0
R596	1-216-295-91	s	RES, CHIP 0
R597	1-216-295-91	s	RES, CHIP 0
R598	1-216-295-91	s	RES, CHIP 0
R604	1-216-295-91	s	RES, CHIP 0
R605	1-216-295-91	s	RES, CHIP 0
R606	1-216-295-91	s	RES, CHIP 0

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R607	1-216-295-91	s	RES, CHIP 0
R608	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R609	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R610	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R611	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R612	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R613	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R614	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R615	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R616	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R617	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R618	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R619	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R620	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R621	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R622	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R640	1-216-295-91	s	RES, CHIP 0
R641	1-216-295-91	s	RES, CHIP 0
R644	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R645	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R646	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R647	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R648	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R660	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R661	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R662	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R663	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R664	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R665	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R666	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R667	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R668	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R669	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R670	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R671	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R672	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R673	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R674	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R675	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R676	1-216-295-91	s	RES, CHIP 0
R684	1-216-295-91	s	RES, CHIP 0
R685	1-216-295-91	s	RES, CHIP 0
R686	1-216-295-91	s	RES, CHIP 0
R687	1-216-295-91	s	RES, CHIP 0
R688	1-216-295-91	s	RES, CHIP 0
R689	1-216-295-91	s	RES, CHIP 0
R690	1-216-295-91	s	RES, CHIP 0
R692	1-216-295-91	s	RES, CHIP 0
R693	1-216-295-91	s	RES, CHIP 0
R694	1-216-295-91	s	RES, CHIP 0
R695	1-216-295-91	s	RES, CHIP 0
R696	1-216-295-91	s	RES, CHIP 0
R697	1-216-295-91	s	RES, CHIP 0
R698	1-216-295-91	s	RES, CHIP 0
R699	1-216-295-91	s	RES, CHIP 0
R700	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R701	*e 1-216-295-91	s	RES, CHIP 0
R710	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R711	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R712	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R713	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R714	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R715	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R716	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R717	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R726	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R727	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R728	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R729	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R730	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R731	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R732	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R733	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R739	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R740	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R741	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R742	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R743	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R744	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R745	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R746	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R766	1-216-295-91	s	RES, CHIP 0
R770	1-216-295-91	s	RES, CHIP 0
R771	1-216-295-91	s	RES, CHIP 0
R772	1-216-295-91	s	RES, CHIP 0
R773	1-216-295-91	s	RES, CHIP 0
R774	1-216-295-91	s	RES, CHIP 0
R775	1-216-295-91	s	RES, CHIP 0
R776	1-216-295-91	s	RES, CHIP 0
R777	1-216-295-91	s	RES, CHIP 0
R778	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R779	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R780	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R781	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R791	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R792	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R793	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R794	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R795	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R796	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R797	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R798	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R806	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R807	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R2000	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R2002	1-216-295-91	s	RES, CHIP 0
R2003	1-216-295-91	s	RES, CHIP 0
R2004	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R2006	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R2500	1-216-295-91	s	RES, CHIP 0
R2501	1-216-295-91	s	RES, CHIP 0
R2502	1-216-295-91	s	RES, CHIP 0
R2503	1-216-295-91	s	RES, CHIP 0
R2504	1-216-295-91	s	RES, CHIP 0
R2505	1-216-295-91	s	RES, CHIP 0
R2506	1-216-295-91	s	RES, CHIP 0
R2507	1-216-295-91	s	RES, CHIP 0
R2508	1-216-295-91	s	RES, CHIP 0

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2509	1-216-295-91	s	RES, CHIP 0
R2510	1-216-295-91	s	RES, CHIP 0
R2511	1-216-295-91	s	RES, CHIP 0
R2512	1-216-295-91	s	RES, CHIP 0
R2513	1-216-295-91	s	RES, CHIP 0
R2515	1-216-295-91	s	RES, CHIP 0
R2517	1-216-295-91	s	RES, CHIP 0
R2518	1-216-295-91	s	RES, CHIP 0
R2519	1-216-295-91	s	RES, CHIP 0
R2520	1-216-295-91	s	RES, CHIP 0
R2521	1-216-295-91	s	RES, CHIP 0
R2522	1-216-295-91	s	RES, CHIP 0
R2523	1-216-295-91	s	RES, CHIP 0
R2524	1-216-295-91	s	RES, CHIP 0
R2525	1-216-295-91	s	RES, CHIP 0
R2526	1-216-295-91	s	RES, CHIP 0
R3000	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3001	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3002	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3003	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3101	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R4004	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4005	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4006	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4007	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4008	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4009	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4010	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R5000	1-216-295-91	s	RES, CHIP 0
R5001	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R5002	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R5003	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R5004	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R5005	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R5010	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R5012	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
RB1	1-233-448-11	s	RES, CHIP NETWORK 22
RB3	1-233-448-11	s	RES, CHIP NETWORK 22
RB6	1-233-448-11	s	RES, CHIP NETWORK 22
RB7	1-233-448-11	s	RES, CHIP NETWORK 22
RB9	1-233-448-11	s	RES, CHIP NETWORK 22
RB12	1-233-448-11	s	RES, CHIP NETWORK 22
RB13	1-233-448-11	s	RES, CHIP NETWORK 22
RB15	1-233-448-11	s	RES, CHIP NETWORK 22
RB18	1-233-448-11	s	RES, CHIP NETWORK 22
RB20	1-233-448-11	s	RES, CHIP NETWORK 22
RB22	1-233-448-11	s	RES, CHIP NETWORK 22
RB25	1-233-448-11	s	RES, CHIP NETWORK 22
RB26	1-233-448-11	s	RES, CHIP NETWORK 22
RB28	1-233-448-11	s	RES, CHIP NETWORK 22
RB31	1-233-448-11	s	RES, CHIP NETWORK 22
RB32	1-233-448-11	s	RES, CHIP NETWORK 22
RB34	1-233-448-11	s	RES, CHIP NETWORK 22
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB40	1-233-448-11	s	RES, CHIP NETWORK 22
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB49	1-233-448-11	s	RES, CHIP NETWORK 22
RB50	1-233-448-11	s	RES, CHIP NETWORK 22
RB51	1-233-448-11	s	RES, CHIP NETWORK 22
RB52	1-233-448-11	s	RES, CHIP NETWORK 22
RB53	1-233-448-11	s	RES, CHIP NETWORK 22
RB54	1-233-448-11	s	RES, CHIP NETWORK 22
RB55	1-233-448-11	s	RES, CHIP NETWORK 22
RB56	1-233-448-11	s	RES, CHIP NETWORK 22
RB57	1-233-448-11	s	RES, CHIP NETWORK 22
RB58	1-233-448-11	s	RES, CHIP NETWORK 22
RB59	1-233-448-11	s	RES, CHIP NETWORK 22
RB60	1-233-448-11	s	RES, CHIP NETWORK 22
RB61	1-233-448-11	s	RES, CHIP NETWORK 22
RB62	1-233-448-11	s	RES, CHIP NETWORK 22
RB63	1-233-448-11	s	RES, CHIP NETWORK 22
RB64	1-233-448-11	s	RES, CHIP NETWORK 22
RB65	1-233-448-11	s	RES, CHIP NETWORK 22
RB66	1-233-448-11	s	RES, CHIP NETWORK 22
RB67	1-233-448-11	s	RES, CHIP NETWORK 22
RB68	1-233-448-11	s	RES, CHIP NETWORK 22
RB69	1-233-448-11	s	RES, CHIP NETWORK 22
RB70	1-233-448-11	s	RES, CHIP NETWORK 22
RB71	1-233-448-11	s	RES, CHIP NETWORK 22
RB72	1-233-448-11	s	RES, CHIP NETWORK 22
RB73	1-233-448-11	s	RES, CHIP NETWORK 22
RB74	1-233-448-11	s	RES, CHIP NETWORK 22
RB75	1-233-448-11	s	RES, CHIP NETWORK 22
RB76	1-233-448-11	s	RES, CHIP NETWORK 22
RB77	1-233-448-11	s	RES, CHIP NETWORK 22
RB78	1-233-448-11	s	RES, CHIP NETWORK 22
RB79	1-233-448-11	s	RES, CHIP NETWORK 22
RB80	1-233-448-11	s	RES, CHIP NETWORK 22
RB81	1-233-448-11	s	RES, CHIP NETWORK 22
RB82	1-233-448-11	s	RES, CHIP NETWORK 22
RB83	1-233-448-11	s	RES, CHIP NETWORK 22
RB84	1-233-448-11	s	RES, CHIP NETWORK 22
RB85	1-233-448-11	s	RES, CHIP NETWORK 22
RB86	1-233-448-11	s	RES, CHIP NETWORK 22
RB87	1-233-448-11	s	RES, CHIP NETWORK 22
RB88	1-233-448-11	s	RES, CHIP NETWORK 22
RB89	1-233-448-11	s	RES, CHIP NETWORK 22
RB90	1-233-448-11	s	RES, CHIP NETWORK 22
RB91	1-233-448-11	s	RES, CHIP NETWORK 22
RB92	1-233-448-11	s	RES, CHIP NETWORK 22
RB93	1-233-448-11	s	RES, CHIP NETWORK 22
RB94	1-233-448-11	s	RES, CHIP NETWORK 22
RB95	1-233-448-11	s	RES, CHIP NETWORK 22
RB96	1-233-448-11	s	RES, CHIP NETWORK 22
RB97	1-233-448-11	s	RES, CHIP NETWORK 22
RB98	1-233-448-11	s	RES, CHIP NETWORK 22
RB100	1-233-448-11	s	RES, CHIP NETWORK 22
RB103	1-233-448-11	s	RES, CHIP NETWORK 22
RB104	1-233-448-11	s	RES, CHIP NETWORK 22
RB106	1-233-448-11	s	RES, CHIP NETWORK 22
RB109	1-233-448-11	s	RES, CHIP NETWORK 22
RB110	1-233-448-11	s	RES, CHIP NETWORK 22
RB111	1-233-448-11	s	RES, CHIP NETWORK 22
RB112	1-233-448-11	s	RES, CHIP NETWORK 22

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB113	1-233-448-11	s	RES, CHIP NETWORK 22
RB114	1-233-448-11	s	RES, CHIP NETWORK 22
RB115	1-233-448-11	s	RES, CHIP NETWORK 22
RB122	1-233-448-11	s	RES, CHIP NETWORK 22
RB123	1-233-448-11	s	RES, CHIP NETWORK 22
RB124	1-233-448-11	s	RES, CHIP NETWORK 22
RB125	1-233-448-11	s	RES, CHIP NETWORK 22
RB126	1-233-448-11	s	RES, CHIP NETWORK 22
RB127	1-233-448-11	s	RES, CHIP NETWORK 22
RB128	1-233-448-11	s	RES, CHIP NETWORK 22
RB129	1-233-448-11	s	RES, CHIP NETWORK 22
RB130	1-233-448-11	s	RES, CHIP NETWORK 22
RB131	1-233-448-11	s	RES, CHIP NETWORK 22
RB132	1-233-448-11	s	RES, CHIP NETWORK 22
RB133	1-233-448-11	s	RES, CHIP NETWORK 22
RB134	1-233-448-11	s	RES, CHIP NETWORK 22
RB135	1-233-448-11	s	RES, CHIP NETWORK 22
RB136	1-233-448-11	s	RES, CHIP NETWORK 22
RB137	1-233-448-11	s	RES, CHIP NETWORK 22
RB138	1-233-448-11	s	RES, CHIP NETWORK 22
RB139	1-233-448-11	s	RES, CHIP NETWORK 22
RB140	1-233-448-11	s	RES, CHIP NETWORK 22
RB141	1-233-448-11	s	RES, CHIP NETWORK 22
RB142	1-233-448-11	s	RES, CHIP NETWORK 22
RB143	1-233-448-11	s	RES, CHIP NETWORK 22
RB144	1-233-448-11	s	RES, CHIP NETWORK 22
RB145	1-233-448-11	s	RES, CHIP NETWORK 22
RB146	1-233-448-11	s	RES, CHIP NETWORK 22
RB147	1-233-448-11	s	RES, CHIP NETWORK 22
RB148	1-233-448-11	s	RES, CHIP NETWORK 22
RB149	1-233-448-11	s	RES, CHIP NETWORK 22
RB150	1-233-448-11	s	RES, CHIP NETWORK 22
RB151	1-233-448-11	s	RES, CHIP NETWORK 22
RB152	1-233-448-11	s	RES, CHIP NETWORK 22
RB153	1-233-448-11	s	RES, CHIP NETWORK 22
RB154	1-233-448-11	s	RES, CHIP NETWORK 22
RB155	1-233-448-11	s	RES, CHIP NETWORK 22
RB156	1-233-448-11	s	RES, CHIP NETWORK 22
RB157	1-233-448-11	s	RES, CHIP NETWORK 22
RB158	1-233-448-11	s	RES, CHIP NETWORK 22
RB159	1-233-448-11	s	RES, CHIP NETWORK 22
RB161	1-233-448-11	s	RES, CHIP NETWORK 22
RB165	1-233-448-11	s	RES, CHIP NETWORK 22
RB166	1-233-448-11	s	RES, CHIP NETWORK 22
RB168	1-233-448-11	s	RES, CHIP NETWORK 22
RB171	1-233-448-11	s	RES, CHIP NETWORK 22
RB172	1-233-448-11	s	RES, CHIP NETWORK 22
RB173	1-233-448-11	s	RES, CHIP NETWORK 22
RB174	1-233-448-11	s	RES, CHIP NETWORK 22
RB175	1-233-448-11	s	RES, CHIP NETWORK 22
RB176	1-233-448-11	s	RES, CHIP NETWORK 22
RB183	1-233-448-11	s	RES, CHIP NETWORK 22
RB184	1-233-448-11	s	RES, CHIP NETWORK 22
RB185	1-233-448-11	s	RES, CHIP NETWORK 22
RB186	1-233-448-11	s	RES, CHIP NETWORK 22
RB187	1-233-448-11	s	RES, CHIP NETWORK 22
RB189	1-233-448-11	s	RES, CHIP NETWORK 22
RB190	1-233-448-11	s	RES, CHIP NETWORK 22
RB191	1-233-448-11	s	RES, CHIP NETWORK 22

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB192	1-233-448-11	s	RES, CHIP NETWORK 22
RB194	1-233-448-11	s	RES, CHIP NETWORK 22
RB195	1-233-448-11	s	RES, CHIP NETWORK 22
RB196	1-233-448-11	s	RES, CHIP NETWORK 22
RB197	1-233-448-11	s	RES, CHIP NETWORK 22
RB198	1-233-448-11	s	RES, CHIP NETWORK 22
RB199	1-233-448-11	s	RES, CHIP NETWORK 22
RB200	1-233-448-11	s	RES, CHIP NETWORK 22
RB201	1-233-448-11	s	RES, CHIP NETWORK 22
RB202	1-233-448-11	s	RES, CHIP NETWORK 22
RB203	1-233-448-11	s	RES, CHIP NETWORK 22
RB204	1-233-448-11	s	RES, CHIP NETWORK 22
RB205	1-233-448-11	s	RES, CHIP NETWORK 22
RB206	1-233-448-11	s	RES, CHIP NETWORK 22
RB207	1-233-448-11	s	RES, CHIP NETWORK 22
RB208	1-233-448-11	s	RES, CHIP NETWORK 22
RB209	1-233-448-11	s	RES, CHIP NETWORK 22
RB210	1-233-448-11	s	RES, CHIP NETWORK 22
RB211	1-233-448-11	s	RES, CHIP NETWORK 22
RB212	1-233-448-11	s	RES, CHIP NETWORK 22
RB213	1-233-448-11	s	RES, CHIP NETWORK 22
RB214	1-233-448-11	s	RES, CHIP NETWORK 22
RB215	1-233-448-11	s	RES, CHIP NETWORK 22
RB216	1-233-448-11	s	RES, CHIP NETWORK 22
RB217	1-233-448-11	s	RES, CHIP NETWORK 22
RB218	1-233-448-11	s	RES, CHIP NETWORK 22
RB222	1-233-448-11	s	RES, CHIP NETWORK 22
RB223	1-233-448-11	s	RES, CHIP NETWORK 22
RB224	1-233-448-11	s	RES, CHIP NETWORK 22
RB400	1-233-448-11	s	RES, CHIP NETWORK 22
RB401	1-233-448-11	s	RES, CHIP NETWORK 22
RB402	1-233-448-11	s	RES, CHIP NETWORK 22
RB403	1-233-448-11	s	RES, CHIP NETWORK 22
RB404	1-233-448-11	s	RES, CHIP NETWORK 22
RB405	1-233-448-11	s	RES, CHIP NETWORK 22
RB406	1-233-448-11	s	RES, CHIP NETWORK 22
RB407	1-233-448-11	s	RES, CHIP NETWORK 22
RB408	1-233-448-11	s	RES, CHIP NETWORK 22
RB409	1-233-448-11	s	RES, CHIP NETWORK 22
RB410	1-233-448-11	s	RES, CHIP NETWORK 22
RB411	1-233-448-11	s	RES, CHIP NETWORK 22
RB412	1-233-448-11	s	RES, CHIP NETWORK 22
RB413	1-233-448-11	s	RES, CHIP NETWORK 22
RB414	1-233-448-11	s	RES, CHIP NETWORK 22
RB415	1-233-448-11	s	RES, CHIP NETWORK 22
RB420	1-233-448-11	s	RES, CHIP NETWORK 22
RB421	1-233-448-11	s	RES, CHIP NETWORK 22
RB422	1-233-448-11	s	RES, CHIP NETWORK 22
RB423	1-233-448-11	s	RES, CHIP NETWORK 22
RB3000	1-233-938-11	s	RES, CHIP NETWORK 470
RB3001	1-233-938-11	s	RES, CHIP NETWORK 470
RB3002	1-233-938-11	s	RES, CHIP NETWORK 470
RB3003	1-233-938-11	s	RES, CHIP NETWORK 470
RB3004	1-233-938-11	s	RES, CHIP NETWORK 470
RB3005	1-233-938-11	s	RES, CHIP NETWORK 470
RB3006	1-233-938-11	s	RES, CHIP NETWORK 470
RB3007	1-233-938-11	s	RES, CHIP NETWORK 470
RB3008	1-233-938-11	s	RES, CHIP NETWORK 470
RB3009	1-233-938-11	s	RES, CHIP NETWORK 470

(OUT-7 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3010	1-233-938-11	s	RES, CHIP NETWORK 470
RB3011	1-233-938-11	s	RES, CHIP NETWORK 470
RB3012	1-233-938-11	s	RES, CHIP NETWORK 470
RB3013	1-233-938-11	s	RES, CHIP NETWORK 470
RB3014	1-233-938-11	s	RES, CHIP NETWORK 470
RB3015	1-233-938-11	s	RES, CHIP NETWORK 470
RB3016	1-233-938-11	s	RES, CHIP NETWORK 470
RB3017	1-233-938-11	s	RES, CHIP NETWORK 470
RB3018	1-233-938-11	s	RES, CHIP NETWORK 470
RB3019	1-233-938-11	s	RES, CHIP NETWORK 470
RB3020	1-233-938-11	s	RES, CHIP NETWORK 470
RB3021	1-233-938-11	s	RES, CHIP NETWORK 470
RB3022	1-233-938-11	s	RES, CHIP NETWORK 470
RB3023	1-233-938-11	s	RES, CHIP NETWORK 470
RB3024	1-233-938-11	s	RES, CHIP NETWORK 470
RB3025	1-233-938-11	s	RES, CHIP NETWORK 470
RB3026	1-233-938-11	s	RES, CHIP NETWORK 470
RB3027	1-233-938-11	s	RES, CHIP NETWORK 470
RB3028	1-233-938-11	s	RES, CHIP NETWORK 470
RB3029	1-233-938-11	s	RES, CHIP NETWORK 470

OUT-20 BOARD
---

*a:[Lot No. 002]
*b:[Lot No. 003 -]
*c:[Lot No. 002 - 081]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8325-882-A	o	MOUNTED CIRCUIT BOARD, OUT-20B
1pc	A-8328-630-A	s	MOUNTED CIRCUIT BOARD, OUT-20C (for 24P system)
1pc	1-783-440-11	o	CABLE ASSY, COAXIAL(CLN) (Not used in 24P system)
1pc	1-783-441-11	o	CABLE ASSY, COAXIAL(1ME1)
1pc	1-783-442-12	o	CABLE ASSY, COAXIAL(1ME2)
1pc	1-783-443-11	o	CABLE ASSY, COAXIAL(2ME1)
1pc	1-783-444-11	o	CABLE ASSY, COAXIAL(2ME2)
1pc	1-783-445-11	o	CABLE ASSY, COAXIAL(PGM1)
1pc	1-783-446-11	o	CABLE ASSY, COAXIAL(PGM2)
1pc	1-783-447-11	o	CABLE ASSY, COAXIAL(PGM3)
1pc	1-783-448-11	o	CABLE ASSY, COAXIAL(PVW)
1pc	1-783-449-11	o	CABLE ASSY, COAXIAL(AX1)
1pc	1-783-450-11	o	CABLE ASSY, COAXIAL(AX2)
1pc	1-783-451-11	o	CABLE ASSY, COAXIAL(AX3)
1pc	1-783-452-11	o	CABLE ASSY, COAXIAL(AX4)
1pc	1-783-453-11	o	CABLE ASSY, COAXIAL(AX5)
1pc	1-783-454-11	o	CABLE ASSY, COAXIAL(AX6)
1pc	1-783-455-11	o	CABLE ASSY, COAXIAL(AX7)
1pc	1-783-456-11	o	CABLE ASSY, COAXIAL(AX8)
1pc	1-783-457-11	o	CABLE ASSY, COAXIAL(AX9)
1pc	1-783-458-11	o	CABLE ASSY, COAXIAL(AX10)
45pcs	3-191-747-01	o	SUPPORT (M3), HEXAGON
2pcs	3-194-878-01	s	LEVER, PC BOARD
8pcs	3-683-631-01	o	CLAMP
14pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
2pcs	7-626-320-11	s	PIN, SPRING 3x8
45pcs	7-682-547-04	s	SCREW +B 3x6
C1	1-125-783-11	s	ELECT 820uF 20% 4V
C2	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C3	1-128-401-11	s	ELECT 100uF 20% 25V
C4	1-125-783-11	s	ELECT 820uF 20% 4V
C5	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C6	1-163-257-11	s	CERAMIC, CHIP 180pF 5% 50V
C7	1-164-346-11	s	CERAMIC 1uF 16V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-117-372-11	s	TANTALUM 100uF 20% 10V
C10	1-125-783-11	s	ELECT 820uF 20% 4V
C11	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C12	1-128-401-11	s	ELECT 100uF 20% 25V
C13	1-128-401-11	s	ELECT 100uF 20% 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C16	1-117-372-11	s	TANTALUM 100uF 20% 10V
C17	1-128-401-11	s	ELECT 100uF 20% 25V
C18	1-117-372-11	s	TANTALUM 100uF 20% 10V
C20	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C21	1-126-401-11	s	ELECT, CHIP 1uF 20% 50V
C22	1-125-783-11	s	ELECT 820uF 20% 4V
C23	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C24	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C25	1-164-346-11	s	CERAMIC 1uF 16V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-125-783-11	s	ELECT 820uF 20% 4V
C28	1-164-182-11	s	CERAMIC, CHIP 3300pF 10% 100V
C29	1-163-259-91	s	CERAMIC, CHIP 220pF 5% 50V
C30	1-164-346-11	s	CERAMIC 1uF 16V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C33	1-127-518-11	s	ALUMN SOLID 100uF 20% 16V
C34	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C35	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C48	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V
C58	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-038-00	s	CERAMIC 0.1uF 25V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-038-00	s	CERAMIC 0.1uF 25V
C279	1-163-038-00	s	CERAMIC 0.1uF 25V
C280	1-163-038-00	s	CERAMIC 0.1uF 25V
C281	1-163-038-00	s	CERAMIC 0.1uF 25V
C282	1-163-038-00	s	CERAMIC 0.1uF 25V
C283	1-163-038-00	s	CERAMIC 0.1uF 25V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-038-00	s	CERAMIC 0.1uF 25V
C292	1-163-038-00	s	CERAMIC 0.1uF 25V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-038-00	s	CERAMIC 0.1uF 25V
C296	1-163-038-00	s	CERAMIC 0.1uF 25V
C297	1-163-038-00	s	CERAMIC 0.1uF 25V
C298	1-163-038-00	s	CERAMIC 0.1uF 25V
C299	1-163-038-00	s	CERAMIC 0.1uF 25V
C430	1-163-038-00	s	CERAMIC 0.1uF 25V
C431	1-163-038-00	s	CERAMIC 0.1uF 25V
C432	1-163-038-00	s	CERAMIC 0.1uF 25V
C433	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C434	1-163-038-00	s	CERAMIC 0.1uF 25V
C435	1-163-038-00	s	CERAMIC 0.1uF 25V
C436	1-163-038-00	s	CERAMIC 0.1uF 25V
C437	1-163-038-00	s	CERAMIC 0.1uF 25V
C438	1-163-038-00	s	CERAMIC 0.1uF 25V
C439	1-163-038-00	s	CERAMIC 0.1uF 25V
C440	1-163-038-00	s	CERAMIC 0.1uF 25V
C441	1-163-038-00	s	CERAMIC 0.1uF 25V
C442	1-163-038-00	s	CERAMIC 0.1uF 25V
C443	1-163-038-00	s	CERAMIC 0.1uF 25V
C444	1-163-038-00	s	CERAMIC 0.1uF 25V
C445	1-163-038-00	s	CERAMIC 0.1uF 25V
C446	1-163-038-00	s	CERAMIC 0.1uF 25V
C447	1-163-038-00	s	CERAMIC 0.1uF 25V
C448	1-163-038-00	s	CERAMIC 0.1uF 25V
C449	1-163-038-00	s	CERAMIC 0.1uF 25V
C450	1-163-038-00	s	CERAMIC 0.1uF 25V
C451	1-163-038-00	s	CERAMIC 0.1uF 25V
C452	1-163-038-00	s	CERAMIC 0.1uF 25V
C453	1-163-038-00	s	CERAMIC 0.1uF 25V
C500	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C501	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C502	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C503	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C504	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C505	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C506	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C507	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C508	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C509	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C510	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C511	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C512	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C513	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C514	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C515	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C527	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C528	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C529	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C530	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C531	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C532	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C533	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C534	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C535	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C536	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C537	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C538	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C539	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C540	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C541	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C542	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C543	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C544	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C545	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C546	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C547	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C548	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C549	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C550	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C551	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C552	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C553	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C554	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C555	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C556	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C557	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C558	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C559	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C560	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C561	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C562	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C563	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C564	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C565	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C566	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C567	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C568	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C569	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C570	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C571	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C572	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C574	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C575	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C576	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C577	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C578	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C590	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C591	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C592	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C593	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C594	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C595	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C596	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C597	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C598	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C599	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C600	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C601	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C602	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C603	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C604	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C605	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C606	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C615	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C616	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C617	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C618	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C619	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C620	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C621	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C622	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C623	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C624	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C625	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C626	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C631	1-163-038-00	s	CERAMIC 0.1uF 25V
C632	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C633	1-163-038-00	s	CERAMIC 0.1uF 25V
C634	1-163-038-00	s	CERAMIC 0.1uF 25V
C635	1-163-038-00	s	CERAMIC 0.1uF 25V
C636	1-163-038-00	s	CERAMIC 0.1uF 25V
C637	1-163-038-00	s	CERAMIC 0.1uF 25V
C638	1-163-038-00	s	CERAMIC 0.1uF 25V
C639	1-163-038-00	s	CERAMIC 0.1uF 25V
C640	1-163-038-00	s	CERAMIC 0.1uF 25V
C641	1-163-038-00	s	CERAMIC 0.1uF 25V
C642	1-163-038-00	s	CERAMIC 0.1uF 25V
C643	1-163-038-00	s	CERAMIC 0.1uF 25V
C644	1-163-038-00	s	CERAMIC 0.1uF 25V
C645	1-163-038-00	s	CERAMIC 0.1uF 25V
C646	1-163-038-00	s	CERAMIC 0.1uF 25V
C647	1-163-038-00	s	CERAMIC 0.1uF 25V
C648	1-163-038-00	s	CERAMIC 0.1uF 25V
C649	1-163-038-00	s	CERAMIC 0.1uF 25V
C650	1-163-038-00	s	CERAMIC 0.1uF 25V
C651	1-163-038-00	s	CERAMIC 0.1uF 25V
C652	1-163-038-00	s	CERAMIC 0.1uF 25V
C653	1-163-038-00	s	CERAMIC 0.1uF 25V
C654	1-163-038-00	s	CERAMIC 0.1uF 25V
C655	1-163-038-00	s	CERAMIC 0.1uF 25V
C656	1-163-038-00	s	CERAMIC 0.1uF 25V
C657	1-163-038-00	s	CERAMIC 0.1uF 25V
C658	1-163-038-00	s	CERAMIC 0.1uF 25V
C659	1-163-038-00	s	CERAMIC 0.1uF 25V
C660	1-163-038-00	s	CERAMIC 0.1uF 25V
C661	1-163-038-00	s	CERAMIC 0.1uF 25V
C662	1-163-038-00	s	CERAMIC 0.1uF 25V
C663	1-163-038-00	s	CERAMIC 0.1uF 25V
C664	1-163-038-00	s	CERAMIC 0.1uF 25V
C665	1-163-038-00	s	CERAMIC 0.1uF 25V
C666	1-163-038-00	s	CERAMIC 0.1uF 25V
C667	1-163-038-00	s	CERAMIC 0.1uF 25V
C668	1-163-038-00	s	CERAMIC 0.1uF 25V
C669	1-163-038-00	s	CERAMIC 0.1uF 25V
C670	1-163-038-00	s	CERAMIC 0.1uF 25V
C671	1-163-038-00	s	CERAMIC 0.1uF 25V
C672	1-163-038-00	s	CERAMIC 0.1uF 25V
C673	1-163-038-00	s	CERAMIC 0.1uF 25V
C674	1-163-038-00	s	CERAMIC 0.1uF 25V
C675	1-163-038-00	s	CERAMIC 0.1uF 25V
C676	1-163-038-00	s	CERAMIC 0.1uF 25V
C677	1-163-038-00	s	CERAMIC 0.1uF 25V
C678	1-163-038-00	s	CERAMIC 0.1uF 25V
C679	1-163-038-00	s	CERAMIC 0.1uF 25V
C680	1-163-038-00	s	CERAMIC 0.1uF 25V
C681	1-163-038-00	s	CERAMIC 0.1uF 25V
C682	1-163-038-00	s	CERAMIC 0.1uF 25V
C683	1-163-038-00	s	CERAMIC 0.1uF 25V
C684	1-163-038-00	s	CERAMIC 0.1uF 25V
C685	1-163-038-00	s	CERAMIC 0.1uF 25V
C686	1-163-038-00	s	CERAMIC 0.1uF 25V
C687	1-163-038-00	s	CERAMIC 0.1uF 25V
C688	1-163-038-00	s	CERAMIC 0.1uF 25V
C689	1-163-038-00	s	CERAMIC 0.1uF 25V
C690	1-163-038-00	s	CERAMIC 0.1uF 25V
C691	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C692	1-163-038-00	s	CERAMIC 0.1uF 25V
C693	1-163-038-00	s	CERAMIC 0.1uF 25V
C694	1-163-038-00	s	CERAMIC 0.1uF 25V
C695	1-163-038-00	s	CERAMIC 0.1uF 25V
C696	1-163-038-00	s	CERAMIC 0.1uF 25V
C697	1-163-038-00	s	CERAMIC 0.1uF 25V
C698	1-163-038-00	s	CERAMIC 0.1uF 25V
C699	1-163-038-00	s	CERAMIC 0.1uF 25V
C700	1-163-038-00	s	CERAMIC 0.1uF 25V
C701	1-163-038-00	s	CERAMIC 0.1uF 25V
C702	1-163-038-00	s	CERAMIC 0.1uF 25V
C703	1-163-038-00	s	CERAMIC 0.1uF 25V
C704	1-163-038-00	s	CERAMIC 0.1uF 25V
C705	1-163-038-00	s	CERAMIC 0.1uF 25V
C706	1-163-038-00	s	CERAMIC 0.1uF 25V
C707	1-163-038-00	s	CERAMIC 0.1uF 25V
C708	1-163-038-00	s	CERAMIC 0.1uF 25V
C709	1-163-038-00	s	CERAMIC 0.1uF 25V
C710	1-163-038-00	s	CERAMIC 0.1uF 25V
C711	1-163-038-00	s	CERAMIC 0.1uF 25V
C712	1-163-038-00	s	CERAMIC 0.1uF 25V
C713	1-163-038-00	s	CERAMIC 0.1uF 25V
C714	1-163-038-00	s	CERAMIC 0.1uF 25V
C715	1-163-038-00	s	CERAMIC 0.1uF 25V
C716	1-163-038-00	s	CERAMIC 0.1uF 25V
C717	1-163-038-00	s	CERAMIC 0.1uF 25V
C718	1-163-038-00	s	CERAMIC 0.1uF 25V
C719	1-163-038-00	s	CERAMIC 0.1uF 25V
C720	1-163-038-00	s	CERAMIC 0.1uF 25V
C721	1-163-038-00	s	CERAMIC 0.1uF 25V
C722	1-163-038-00	s	CERAMIC 0.1uF 25V
C723	1-163-038-00	s	CERAMIC 0.1uF 25V
C724	1-163-038-00	s	CERAMIC 0.1uF 25V
C725	1-163-038-00	s	CERAMIC 0.1uF 25V
C726	1-163-038-00	s	CERAMIC 0.1uF 25V
C727	1-163-038-00	s	CERAMIC 0.1uF 25V
C728	1-163-038-00	s	CERAMIC 0.1uF 25V
C729	1-163-038-00	s	CERAMIC 0.1uF 25V
C730	1-163-038-00	s	CERAMIC 0.1uF 25V
C731	1-163-038-00	s	CERAMIC 0.1uF 25V
C732	1-163-038-00	s	CERAMIC 0.1uF 25V
C733	1-163-038-00	s	CERAMIC 0.1uF 25V
C734	1-163-038-00	s	CERAMIC 0.1uF 25V
C735	1-163-038-00	s	CERAMIC 0.1uF 25V
C736	1-163-038-00	s	CERAMIC 0.1uF 25V
C737	1-163-038-00	s	CERAMIC 0.1uF 25V
C738	1-163-038-00	s	CERAMIC 0.1uF 25V
C739	1-163-038-00	s	CERAMIC 0.1uF 25V
C740	1-163-038-00	s	CERAMIC 0.1uF 25V
C741	1-163-038-00	s	CERAMIC 0.1uF 25V
C742	1-163-038-00	s	CERAMIC 0.1uF 25V
C743	1-163-038-00	s	CERAMIC 0.1uF 25V
C744	1-163-038-00	s	CERAMIC 0.1uF 25V
C745	1-163-038-00	s	CERAMIC 0.1uF 25V
C746	1-163-038-00	s	CERAMIC 0.1uF 25V
C747	1-163-038-00	s	CERAMIC 0.1uF 25V
C748	1-163-038-00	s	CERAMIC 0.1uF 25V
C749	1-163-038-00	s	CERAMIC 0.1uF 25V
C750	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C751	1-163-038-00	s	CERAMIC 0.1uF 25V
C752	1-163-038-00	s	CERAMIC 0.1uF 25V
C753	1-163-038-00	s	CERAMIC 0.1uF 25V
C754	1-163-038-00	s	CERAMIC 0.1uF 25V
C755	1-163-038-00	s	CERAMIC 0.1uF 25V
C756	1-163-038-00	s	CERAMIC 0.1uF 25V
C757	1-163-038-00	s	CERAMIC 0.1uF 25V
C758	1-163-038-00	s	CERAMIC 0.1uF 25V
C759	1-163-038-00	s	CERAMIC 0.1uF 25V
C760	1-163-038-00	s	CERAMIC 0.1uF 25V
C761	1-163-038-00	s	CERAMIC 0.1uF 25V
C762	1-163-038-00	s	CERAMIC 0.1uF 25V
C763	1-163-038-00	s	CERAMIC 0.1uF 25V
C764	1-163-038-00	s	CERAMIC 0.1uF 25V
C765	1-163-038-00	s	CERAMIC 0.1uF 25V
C766	1-163-038-00	s	CERAMIC 0.1uF 25V
C767	1-163-038-00	s	CERAMIC 0.1uF 25V
C768	1-163-038-00	s	CERAMIC 0.1uF 25V
C769	1-163-038-00	s	CERAMIC 0.1uF 25V
C770	1-163-038-00	s	CERAMIC 0.1uF 25V
C771	1-163-038-00	s	CERAMIC 0.1uF 25V
C772	1-163-038-00	s	CERAMIC 0.1uF 25V
C773	1-163-038-00	s	CERAMIC 0.1uF 25V
C774	1-163-038-00	s	CERAMIC 0.1uF 25V
C775	1-163-038-00	s	CERAMIC 0.1uF 25V
C776	1-163-038-00	s	CERAMIC 0.1uF 25V
C777	1-163-038-00	s	CERAMIC 0.1uF 25V
C778	1-163-038-00	s	CERAMIC 0.1uF 25V
C779	1-163-038-00	s	CERAMIC 0.1uF 25V
C780	1-163-038-00	s	CERAMIC 0.1uF 25V
C781	1-163-038-00	s	CERAMIC 0.1uF 25V
C782	1-163-038-00	s	CERAMIC 0.1uF 25V
C783	1-163-038-00	s	CERAMIC 0.1uF 25V
C784	1-163-038-00	s	CERAMIC 0.1uF 25V
C785	1-163-038-00	s	CERAMIC 0.1uF 25V
C786	1-163-038-00	s	CERAMIC 0.1uF 25V
C787	1-163-038-00	s	CERAMIC 0.1uF 25V
C788	1-163-038-00	s	CERAMIC 0.1uF 25V
C789	1-163-038-00	s	CERAMIC 0.1uF 25V
C790	1-163-038-00	s	CERAMIC 0.1uF 25V
C791	1-163-038-00	s	CERAMIC 0.1uF 25V
C792	1-163-038-00	s	CERAMIC 0.1uF 25V
C793	1-163-038-00	s	CERAMIC 0.1uF 25V
C794	1-163-038-00	s	CERAMIC 0.1uF 25V
C795	1-163-038-00	s	CERAMIC 0.1uF 25V
C796	1-163-038-00	s	CERAMIC 0.1uF 25V
C797	1-163-038-00	s	CERAMIC 0.1uF 25V
C798	1-163-038-00	s	CERAMIC 0.1uF 25V
C799	1-163-038-00	s	CERAMIC 0.1uF 25V
C800	1-163-038-00	s	CERAMIC 0.1uF 25V
C801	1-163-038-00	s	CERAMIC 0.1uF 25V
C802	1-163-038-00	s	CERAMIC 0.1uF 25V
C803	1-163-038-00	s	CERAMIC 0.1uF 25V
C804	1-163-038-00	s	CERAMIC 0.1uF 25V
C805	1-163-038-00	s	CERAMIC 0.1uF 25V
C806	1-163-038-00	s	CERAMIC 0.1uF 25V
C807	1-163-038-00	s	CERAMIC 0.1uF 25V
C808	1-163-038-00	s	CERAMIC 0.1uF 25V
C809	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C810	1-163-038-00	s	CERAMIC 0.1uF 25V
C811	1-163-038-00	s	CERAMIC 0.1uF 25V
C812	1-163-038-00	s	CERAMIC 0.1uF 25V
C813	1-163-038-00	s	CERAMIC 0.1uF 25V
C814	1-163-038-00	s	CERAMIC 0.1uF 25V
C815	1-163-038-00	s	CERAMIC 0.1uF 25V
C816	1-163-038-00	s	CERAMIC 0.1uF 25V
C817	1-163-038-00	s	CERAMIC 0.1uF 25V
C818	1-163-038-00	s	CERAMIC 0.1uF 25V
C819	1-163-038-00	s	CERAMIC 0.1uF 25V
C820	1-163-038-00	s	CERAMIC 0.1uF 25V
C821	1-163-038-00	s	CERAMIC 0.1uF 25V
C822	1-163-038-00	s	CERAMIC 0.1uF 25V
C823	1-163-038-00	s	CERAMIC 0.1uF 25V
C824	1-163-038-00	s	CERAMIC 0.1uF 25V
C825	1-163-038-00	s	CERAMIC 0.1uF 25V
C826	1-163-038-00	s	CERAMIC 0.1uF 25V
C827	1-163-038-00	s	CERAMIC 0.1uF 25V
C828	1-163-038-00	s	CERAMIC 0.1uF 25V
C829	1-163-038-00	s	CERAMIC 0.1uF 25V
C830	1-163-038-00	s	CERAMIC 0.1uF 25V
C831	1-163-038-00	s	CERAMIC 0.1uF 25V
C832	1-163-038-00	s	CERAMIC 0.1uF 25V
C833	1-163-038-00	s	CERAMIC 0.1uF 25V
C834	1-163-038-00	s	CERAMIC 0.1uF 25V
C835	1-163-038-00	s	CERAMIC 0.1uF 25V
C836	1-163-038-00	s	CERAMIC 0.1uF 25V
C837	1-163-038-00	s	CERAMIC 0.1uF 25V
C838	1-163-038-00	s	CERAMIC 0.1uF 25V
C839	1-163-038-00	s	CERAMIC 0.1uF 25V
C840	1-163-038-00	s	CERAMIC 0.1uF 25V
C841	1-163-038-00	s	CERAMIC 0.1uF 25V
C842	1-163-038-00	s	CERAMIC 0.1uF 25V
C843	1-163-038-00	s	CERAMIC 0.1uF 25V
C844	1-163-038-00	s	CERAMIC 0.1uF 25V
C845	1-163-038-00	s	CERAMIC 0.1uF 25V
C846	1-163-038-00	s	CERAMIC 0.1uF 25V
C847	1-163-038-00	s	CERAMIC 0.1uF 25V
C848	1-163-038-00	s	CERAMIC 0.1uF 25V
C849	1-163-038-00	s	CERAMIC 0.1uF 25V
C850	1-163-038-00	s	CERAMIC 0.1uF 25V
C851	1-163-038-00	s	CERAMIC 0.1uF 25V
C852	1-163-038-00	s	CERAMIC 0.1uF 25V
C853	1-163-038-00	s	CERAMIC 0.1uF 25V
C854	1-163-038-00	s	CERAMIC 0.1uF 25V
C855	1-163-038-00	s	CERAMIC 0.1uF 25V
C856	1-163-038-00	s	CERAMIC 0.1uF 25V
C857	1-163-038-00	s	CERAMIC 0.1uF 25V
C858	1-163-038-00	s	CERAMIC 0.1uF 25V
C859	1-163-038-00	s	CERAMIC 0.1uF 25V
C860	1-163-038-00	s	CERAMIC 0.1uF 25V
C862	1-163-038-00	s	CERAMIC 0.1uF 25V
C863	1-163-038-00	s	CERAMIC 0.1uF 25V
C864	1-163-038-00	s	CERAMIC 0.1uF 25V
C865	1-163-038-00	s	CERAMIC 0.1uF 25V
C866	1-163-038-00	s	CERAMIC 0.1uF 25V
C867	1-163-038-00	s	CERAMIC 0.1uF 25V
C868	1-163-038-00	s	CERAMIC 0.1uF 25V
C869	1-163-038-00	s	CERAMIC 0.1uF 25V

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C870	1-163-038-00	s	CERAMIC 0.1uF 25V
C871	1-163-038-00	s	CERAMIC 0.1uF 25V
C872	1-163-038-00	s	CERAMIC 0.1uF 25V
C873	1-163-038-00	s	CERAMIC 0.1uF 25V
C1000	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1001	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1002	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1919	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1920	1-117-372-11	s	TANTALUM 100uF 20% 10V
C1921	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C2006	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C2200	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2201	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2202	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2203	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2204	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2205	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2206	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2207	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2208	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2212	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2213	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2214	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2215	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2216	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2217	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C2500	1-163-038-00	s	CERAMIC 0.1uF 25V
C3000	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C3002	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (for 24P system)
C3003	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3004	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3005	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3006	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3007	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3008	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3009	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3010	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3011	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3012	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3013	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3014	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3015	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3016	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3018	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (for 24P system)
C3019	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V (Not used in 24P system)
C3020	1-126-933-11	s	CAPACITOR, ELECT 100MF/16V (Not used in 24P system)
C3021	1-164-159-21	s	CAPACITOR, CERAMIC 0.1MF (Not used in 24P system)
CN2	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN3	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN4	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN5	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN6	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN7	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN8	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN9	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN10	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN11	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN12	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN13	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN14	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN15	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN16	1-779-393-11	o	CONNECTOR, BB 100P, MALE
CN50	1-560-759-00	o	CONNECTOR, RIGHT ANGLE 10P, MALE
D1	8-719-048-17	s	DIODE MBRS130LT3
D2	8-719-048-17	s	DIODE MBRS130LT3
D3	8-719-048-17	s	DIODE MBRS130LT3
D4	8-719-048-17	s	DIODE MBRS130LT3
D5	8-719-048-17	s	DIODE MBRS130LT3
D6	8-719-048-17	s	DIODE MBRS130LT3
D7	8-719-975-84	s	DIODE AY1101W-88
D8	8-719-975-84	s	DIODE AY1101W-88
D9	8-719-975-84	s	DIODE AY1101W-88
D10	8-719-975-84	s	DIODE AY1101W-88
F1	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F2	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F3	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F4	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F5	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F6	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F20	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
F21	⚠ 1-533-843-21	s	FUSE, CHIP 10A 125V
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE
IC1	8-759-466-60	s	IC LTC1266CS-E2
IC6	8-759-466-60	s	IC LTC1266CS-E2
IC7	8-759-466-60	s	IC LTC1266CS-E2
IC10	8-759-466-21	s	IC S4405B-80
IC11	8-759-465-49	s	IC MC10ELT21DR2
IC13	8-759-386-26	s	IC 74LCX574MTCX
IC14	8-759-386-26	s	IC 74LCX574MTCX
IC15	8-759-386-27	s	IC 74LCX04MTCX
IC16	8-759-386-26	s	IC 74LCX574MTCX
IC17	8-759-271-82	s	IC DS3695ATM
IC18	8-759-464-46	s	IC CXD8899J

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC19	8-759-386-26	s	IC 74LCX574MTCX
IC20	8-759-386-26	s	IC 74LCX574MTCX
IC21	8-759-464-46	s	IC CXD8899J
IC22	8-759-464-48	s	IC CXD8900J
IC23	8-759-464-46	s	IC CXD8899J
IC24	8-759-464-46	s	IC CXD8899J
IC25	8-759-464-48	s	IC CXD8900J
IC26	8-759-386-27	s	IC 74LCX04MTCX
IC27	8-759-271-78	s	IC DS26C32ATM
IC28	8-759-386-26	s	IC 74LCX574MTCX
IC29	8-759-542-61	s	IC EPM7128-TXINIT-V1
IC30	8-759-386-27	s	IC 74LCX04MTCX
IC31	8-759-386-26	s	IC 74LCX574MTCX
IC32	8-759-386-26	s	IC 74LCX574MTCX
IC33	8-759-464-48	s	IC CXD8900J
IC34	8-759-464-48	s	IC CXD8900J
IC35	8-759-464-48	s	IC CXD8900J
IC36	8-759-469-98	s	IC CAT93C66K-LE10
IC37	8-759-464-48	s	IC CXD8900J
IC38	8-759-464-46	s	IC CXD8899J
IC39	8-759-386-26	s	IC 74LCX574MTCX
IC40	8-759-464-46	s	IC CXD8899J
IC41	8-759-523-51	s	IC TC74ACT574FT(EL)
IC42	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC43	8-759-505-00	s	IC CXD8052Q
IC46	8-759-466-59	s	IC CGS2535TVX
IC47	8-759-466-59	s	IC CGS2535TVX
IC48	8-759-464-48	s	IC CXD8900J
IC49	8-759-464-48	s	IC CXD8900J
IC50	8-759-464-48	s	IC CXD8900J
IC51	8-759-464-48	s	IC CXD8900J
IC52	8-759-464-48	s	IC CXD8900J
IC53	8-759-464-48	s	IC CXD8900J
IC54	8-759-464-48	s	IC CXD8900J
IC55	8-759-464-48	s	IC CXD8900J
IC56	8-759-464-48	s	IC CXD8900J
IC57	8-759-464-48	s	IC CXD8900J
IC58	8-759-464-48	s	IC CXD8900J
IC59	8-759-464-48	s	IC CXD8900J
IC60	8-759-464-46	s	IC CXD8899J
IC61	8-759-464-46	s	IC CXD8899J
IC62	8-759-464-46	s	IC CXD8899J
IC63	8-759-464-46	s	IC CXD8899J
IC64	8-759-464-46	s	IC CXD8899J
IC65	8-759-464-46	s	IC CXD8899J
IC66	8-759-464-46	s	IC CXD8899J
IC67	8-759-464-46	s	IC CXD8899J
IC68	8-759-464-46	s	IC CXD8899J
IC69	8-759-464-46	s	IC CXD8899J
IC70	8-759-464-46	s	IC CXD8899J
IC71	8-759-464-46	s	IC CXD8899J
IC72	8-759-386-26	s	IC 74LCX574MTCX
IC73	8-759-386-27	s	IC 74LCX04MTCX
IC74	8-759-386-26	s	IC 74LCX574MTCX
IC75	8-759-386-26	s	IC 74LCX574MTCX
IC76	8-759-386-26	s	IC 74LCX574MTCX
IC77	8-759-386-27	s	IC 74LCX04MTCX
IC78	8-759-386-26	s	IC 74LCX574MTCX
IC79	8-759-386-26	s	IC 74LCX574MTCX

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC80	8-759-386-26	s	IC 74LCX574MTCX
IC81	8-759-386-27	s	IC 74LCX04MTCX
IC82	8-759-386-26	s	IC 74LCX574MTCX
IC83	8-759-386-26	s	IC 74LCX574MTCX
IC84	8-759-386-26	s	IC 74LCX574MTCX
IC85	8-759-386-27	s	IC 74LCX04MTCX
IC86	8-759-386-26	s	IC 74LCX574MTCX
IC87	8-759-386-26	s	IC 74LCX574MTCX
IC88	8-759-386-26	s	IC 74LCX574MTCX
IC89	8-759-386-27	s	IC 74LCX04MTCX
IC90	8-759-386-26	s	IC 74LCX574MTCX
IC91	8-759-386-26	s	IC 74LCX574MTCX
IC92	8-759-386-26	s	IC 74LCX574MTCX
IC93	8-759-386-27	s	IC 74LCX04MTCX
IC94	8-759-386-26	s	IC 74LCX574MTCX
IC95	8-759-386-26	s	IC 74LCX574MTCX
IC96	8-759-523-49	s	IC TC74ACT541FT(EL)
IC97	8-759-523-49	s	IC TC74ACT541FT(EL)
IC99	8-759-523-49	s	IC TC74ACT541FT(EL)
IC100	8-759-464-48	s	IC CXD8900J
IC101	8-759-464-48	s	IC CXD8900J
IC102	8-759-464-48	s	IC CXD8900J
IC103	8-759-464-48	s	IC CXD8900J
IC104	8-759-464-48	s	IC CXD8900J
IC105	8-759-464-48	s	IC CXD8900J
IC106	8-759-464-48	s	IC CXD8900J
IC107	8-759-464-48	s	IC CXD8900J
IC108	8-759-464-48	s	IC CXD8900J
IC109	8-759-464-48	s	IC CXD8900J
IC110	8-759-464-48	s	IC CXD8900J
IC111	8-759-464-48	s	IC CXD8900J
IC112	8-759-464-46	s	IC CXD8899J
IC113	8-759-464-46	s	IC CXD8899J
IC114	8-759-464-46	s	IC CXD8899J
IC115	8-759-464-46	s	IC CXD8899J
IC116	8-759-464-46	s	IC CXD8899J
IC117	8-759-464-46	s	IC CXD8899J
IC118	8-759-464-46	s	IC CXD8899J
IC119	8-759-464-46	s	IC CXD8899J
IC120	8-759-464-46	s	IC CXD8899J
IC121	8-759-464-46	s	IC CXD8899J
IC122	8-759-464-46	s	IC CXD8899J
IC123	8-759-464-46	s	IC CXD8899J
IC124	8-759-386-26	s	IC 74LCX574MTCX
IC125	8-759-386-27	s	IC 74LCX04MTCX
IC126	8-759-386-26	s	IC 74LCX574MTCX
IC127	8-759-386-26	s	IC 74LCX574MTCX
IC128	8-759-386-26	s	IC 74LCX574MTCX
IC129	8-759-386-27	s	IC 74LCX04MTCX
IC130	8-759-386-26	s	IC 74LCX574MTCX
IC131	8-759-386-26	s	IC 74LCX574MTCX
IC132	8-759-386-26	s	IC 74LCX574MTCX
IC133	8-759-386-27	s	IC 74LCX04MTCX
IC134	8-759-386-26	s	IC 74LCX574MTCX
IC135	8-759-386-26	s	IC 74LCX574MTCX
IC136	8-759-386-26	s	IC 74LCX574MTCX
IC137	8-759-386-27	s	IC 74LCX04MTCX
IC138	8-759-386-26	s	IC 74LCX574MTCX
IC139	8-759-386-26	s	IC 74LCX574MTCX

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC140	8-759-386-26	s	IC 74LCX574MTCX
IC141	8-759-386-27	s	IC 74LCX04MTCX
IC142	8-759-386-26	s	IC 74LCX574MTCX
IC143	8-759-386-26	s	IC 74LCX574MTCX
IC144	8-759-386-26	s	IC 74LCX574MTCX
IC145	8-759-386-27	s	IC 74LCX04MTCX
IC146	8-759-386-26	s	IC 74LCX574MTCX
IC147	8-759-386-26	s	IC 74LCX574MTCX
IC300	8-759-389-45	s	IC 74LCX16244MTDX
IC301	8-759-389-45	s	IC 74LCX16244MTDX
IC302	8-759-389-45	s	IC 74LCX16244MTDX
IC303	8-759-389-45	s	IC 74LCX16244MTDX
IC305	8-759-389-45	s	IC 74LCX16244MTDX
IC508	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC509	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC510	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC511	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC512	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC513	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC514	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC515	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC521	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC528	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC536	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC538	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC543	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC545	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC553	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC555	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC560	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC562	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC569	8-759-466-63	s	IC CXD8895Q
IC570	8-759-466-63	s	IC CXD8895Q
IC572	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC574	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC579	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC581	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC584	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC585	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC586	8-759-662-08	s	IC EPF10K40RC208-3(04)
IC587	8-759-577-23	o	IC EPC1-SAFE-V2
IC593	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC600	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC607	8-759-466-59	s	IC CGS2535TVX
IC608	8-759-466-59	s	IC CGS2535TVX
IC609	8-759-466-59	s	IC CGS2535TVX
IC610	8-759-466-59	s	IC CGS2535TVX
IC611	8-759-523-51	s	IC TC74ACT574FT(EL)
IC613	8-759-389-48	s	IC 74LCX16374MTDX
IC614	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC618	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC621	8-759-464-48	s	IC CXD8900J
IC623	8-759-464-48	s	IC CXD8900J
IC624	8-759-386-26	s	IC 74LCX574MTCX
IC626	8-759-464-48	s	IC CXD8900J
IC628	8-759-464-48	s	IC CXD8900J
IC634	8-759-448-56	s	IC TC74AC240F-EL
IC635	8-759-523-49	s	IC TC74ACT541FT(EL)
IC636	8-759-523-49	s	IC TC74ACT541FT(EL)

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC637	8-759-523-49	s	IC TC74ACT541FT(EL)
IC638	8-759-523-49	s	IC TC74ACT541FT(EL)
IC639	8-759-456-26	s	IC 74LCX541MTCX
IC640	8-759-456-26	s	IC 74LCX541MTCX
IC642	8-759-244-75	s	IC TC74AC541F
IC644	8-759-456-26	s	IC 74LCX541MTCX
IC645	8-759-456-26	s	IC 74LCX541MTCX
IC646	8-759-505-00	s	IC CXD8052Q
IC648	8-759-523-49	s	IC TC74ACT541FT(EL)
IC649	8-759-523-49	s	IC TC74ACT541FT(EL)
IC650	8-759-523-49	s	IC TC74ACT541FT(EL)
IC651	8-759-523-49	s	IC TC74ACT541FT(EL)
IC652	8-759-523-49	s	IC TC74ACT541FT(EL)
IC653	8-759-523-49	s	IC TC74ACT541FT(EL)
IC654	8-759-523-49	s	IC TC74ACT541FT(EL)
IC655	8-759-523-49	s	IC TC74ACT541FT(EL)
IC656	8-759-523-49	s	IC TC74ACT541FT(EL)
IC657	8-759-523-49	s	IC TC74ACT541FT(EL)
IC658	8-759-456-26	s	IC 74LCX541MTCX
IC659	8-759-456-26	s	IC 74LCX541MTCX
IC660	8-759-456-26	s	IC 74LCX541MTCX
IC661	8-759-456-26	s	IC 74LCX541MTCX
IC662	8-759-456-26	s	IC 74LCX541MTCX
IC663	8-759-456-26	s	IC 74LCX541MTCX
IC664	8-759-456-26	s	IC 74LCX541MTCX
IC665	8-759-456-26	s	IC 74LCX541MTCX
IC666	8-759-456-26	s	IC 74LCX541MTCX
IC667	8-759-456-26	s	IC 74LCX541MTCX
IC700	8-759-466-59	s	IC CGS2535TVX
IC701	8-759-466-59	s	IC CGS2535TVX
IC702	8-759-468-08	s	IC 74LVX3L384QSCX
IC703	8-759-468-08	s	IC 74LVX3L384QSCX
IC706	8-759-456-26	s	IC 74LCX541MTCX
IC707	8-759-523-34	s	IC TC74ACT00FT(EL)
IC708	8-759-523-39	s	IC TC74ACT32FT(EL)
IC800	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC3000	8-759-456-26	s	IC 74LCX541MTCX
IC3001	8-759-464-48	s	IC CXD8900J
IC3002	8-759-389-26	s	IC 74LCX08MTCX
IS29	1-251-272-11	o	SOCKET, IC 84P
IS587	1-251-093-11	o	SOCKET, IC 20P
L4	1-469-060-11	s	INDUCTOR 6.1uH
L5	1-469-060-11	s	INDUCTOR 6.1uH
L6	1-469-060-11	s	INDUCTOR 6.1uH
Q1	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q2	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q3	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q4	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q5	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
Q6	8-729-045-16	s	TRANSISTOR SI4410DY-T1-REVA
R1	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R2	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R3	1-216-688-11	s	METAL, CHIP 36k 0.5% 1/10W
R4 *b	1-216-683-11	s	RESISTOR, CHIP 22K 1/10W(2012) (Except for 24P system)
*a	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W (Except for 24P system)
	1-216-686-11	s	METAL, CHIP 30k 0.5% 1/10W (For 24P system)

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R6	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R7	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R8	1-219-610-11	s	METAL, CHIP 0.02 1% 1W
R9 *b	1-216-295-91	s	CONDUCTOR, CHIP(2012) (Except for 24P system)
*a	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W (Except for 24P system)
	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (for 24P system)
R10	1-218-756-11	s	METAL 150k 0.5% 1/10W
R11 *b	1-216-295-91	s	CONDUCTOR, CHIP(2012) (Except for 24P system)
*a	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W (Except for 24P system)
	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (for 24P system)
R12	1-218-756-11	s	METAL 150k 0.5% 1/10W
R13	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R14	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R15	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R16	1-216-655-11	s	METAL, CHIP 1.5k 0.5% 1/10W
R17	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R18	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R25	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R26	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R27	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R28	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R30	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R31	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R39	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R52	1-216-295-91	s	RES, CHIP 0
R53	1-216-295-91	s	RES, CHIP 0
R54	1-216-295-91	s	RES, CHIP 0
R55	1-216-295-91	s	RES, CHIP 0
R56	1-216-295-91	s	RES, CHIP 0
R57	1-216-295-91	s	RES, CHIP 0
R58	1-216-295-91	s	RES, CHIP 0
R59	1-216-295-91	s	RES, CHIP 0
R64	1-216-295-91	s	RES, CHIP 0
R65	1-216-295-91	s	RES, CHIP 0
R66	1-216-295-91	s	RES, CHIP 0
R67	1-216-295-91	s	RES, CHIP 0
R68	1-216-295-91	s	RES, CHIP 0
R69	1-216-295-91	s	RES, CHIP 0
R70	1-216-295-91	s	RES, CHIP 0
R79	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R80	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R81	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R82	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R84	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R93	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R94	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R95	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R96	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R97	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R98	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R99	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R100	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R101	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R506	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R507	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R510	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R511	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R512	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R513	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R514	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R515	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R516	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R517	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R518	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R519	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R520	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R521	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R522	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R523	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R524	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R525	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R564	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R565	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R566	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R567	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R568	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R569	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R570	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R571	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R572	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R573	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R574	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R575	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R576	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R577	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R578	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R595	1-216-295-91	s	RES, CHIP 0
R596	1-216-295-91	s	RES, CHIP 0 (Not used in 24P system)
R597	1-216-295-91	s	RES, CHIP 0
R598	1-216-295-91	s	RES, CHIP 0 (Not used in 24P system)
R604	1-216-295-91	s	RES, CHIP 0
R605	1-216-295-91	s	RES, CHIP 0 (Not used in 24P system)
R606	1-216-295-91	s	RES, CHIP 0
R607	1-216-295-91	s	RES, CHIP 0 (Not used in 24P system)
R608	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R609	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R610	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R611	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R612	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R613	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R614	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R615	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R616	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R617	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R618	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R619	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R620	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R621	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R622	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R640	1-216-295-91	s	RES, CHIP 0
R641	1-216-295-91	s	RES, CHIP 0
R644	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R645	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R646	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R647	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R648	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R660	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R661	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R662	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R663	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R664	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R665	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R666	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R667	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R668	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R669	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R670	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R671	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R672	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R673	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R674	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R675	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R676	1-216-295-91	s	RES, CHIP 0
R684	1-216-295-91	s	RES, CHIP 0
R685	1-216-295-91	s	RES, CHIP 0
R686	1-216-295-91	s	RES, CHIP 0
R687	1-216-295-91	s	RES, CHIP 0
R688	1-216-295-91	s	RES, CHIP 0
R689	1-216-295-91	s	RES, CHIP 0
R690	1-216-295-91	s	RES, CHIP 0
R692	1-216-295-91	s	RES, CHIP 0
R693	1-216-295-91	s	RES, CHIP 0
R694	1-216-295-91	s	RES, CHIP 0
R695	1-216-295-91	s	RES, CHIP 0
R696	1-216-295-91	s	RES, CHIP 0
R697	1-216-295-91	s	RES, CHIP 0
R698	1-216-295-91	s	RES, CHIP 0
R699	1-216-295-91	s	RES, CHIP 0
R700	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R701	1-216-651-11	s	RESISTOR, CHIP 1K 1/10W(2012)
R710	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R711	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R712	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R713	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R714	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R715	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R716	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R717	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R726	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R727	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R728	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R729	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R730	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R731	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R732	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R733	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R739	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R740	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R741	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R742	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R743	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R744	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R745	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R746	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R766	1-216-295-91	s	RES, CHIP 0
R770	1-216-295-91	s	RES, CHIP 0
R771	1-216-295-91	s	RES, CHIP 0
R772	1-216-295-91	s	RES, CHIP 0
R773	1-216-295-91	s	RES, CHIP 0
R774	1-216-295-91	s	RES, CHIP 0
R775	1-216-295-91	s	RES, CHIP 0
R776	1-216-295-91	s	RES, CHIP 0
R777	1-216-295-91	s	RES, CHIP 0
R778	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R779	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R780	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R781	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R791	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R792	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R793	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R794	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R795	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R796	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R797	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R798	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R806	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R807	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R2000	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R2002	1-216-295-91	s	RES, CHIP 0
R2003	1-216-295-91	s	RES, CHIP 0
R2004	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R2006	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R2500	1-216-295-91	s	RES, CHIP 0
R2501	1-216-295-91	s	RES, CHIP 0
R2502	1-216-295-91	s	RES, CHIP 0
R2503	1-216-295-91	s	RES, CHIP 0
R2504	1-216-295-91	s	RES, CHIP 0
R2505	1-216-295-91	s	RES, CHIP 0
R2506	1-216-295-91	s	RES, CHIP 0
R2507	1-216-295-91	s	RES, CHIP 0
R2508	1-216-295-91	s	RES, CHIP 0
R2509	1-216-295-91	s	RES, CHIP 0
R2510	1-216-295-91	s	RES, CHIP 0
R2511	1-216-295-91	s	RES, CHIP 0
R2512	1-216-295-91	s	RES, CHIP 0
R2513	1-216-295-91	s	RES, CHIP 0
R2515	1-216-295-91	s	RES, CHIP 0
R2517	1-216-295-91	s	RES, CHIP 0
R2518	1-216-295-91	s	RES, CHIP 0
R2519	1-216-295-91	s	RES, CHIP 0
R2520	1-216-295-91	s	RES, CHIP 0
R2521	1-216-295-91	s	RES, CHIP 0
R2522	1-216-295-91	s	RES, CHIP 0
R2523	1-216-295-91	s	RES, CHIP 0
R2524	1-216-295-91	s	RES, CHIP 0
R2525	1-216-295-91	s	RES, CHIP 0
R2526	1-216-295-91	s	RES, CHIP 0

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3000	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3001	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3002	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3003	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3101	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R4004	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4005	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4006	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4007	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4008	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4009	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R4010	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R5000	1-216-295-91	s	RES, CHIP 0
R5001	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R5002	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R5003	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R5004	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R5005	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R5010	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R5012	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R6009	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6010	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6011	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6012	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6013	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6014	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6015	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6016	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6023	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R6024 *c	1-216-295-91	s	CONDUCTOR, CHIP (2012) (Except for 24P system)
	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6025 *c	1-216-295-91	s	CONDUCTOR, CHIP (2012) (Except for 24P system)
	1-216-295-91	s	CONDUCTOR, CHIP (2012) (for 24P system)
R6034	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (for 24P system)
R6035	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (for 24P system)
R6036	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (for 24P system)
R6046	1-216-295-91	s	CONDUCTOR, CHIP (2012) (Not used in 24P system)
R6052	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (for 24P system)
R6053	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6054	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6055	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R6056	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6057	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6058	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6059	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6060	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6061	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6062	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6063	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6064	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6065	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6066	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6067	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (Not used in 24P system)
R6069	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (for 24P system)
R6071	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012)
R6072 *c	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (Except for 24P system)
	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (for 24P system)
R6073 *c	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (Except for 24P system)
	1-216-623-11	s	RESISTOR, CHIP 68 1/10W(2012) (for 24P system)
RB1	1-233-448-11	s	RES, CHIP NETWORK 22
RB3	1-233-448-11	s	RES, CHIP NETWORK 22
RB6	1-233-448-11	s	RES, CHIP NETWORK 22
RB7	1-233-448-11	s	RES, CHIP NETWORK 22
RB9	1-233-448-11	s	RES, CHIP NETWORK 22
RB12	1-233-448-11	s	RES, CHIP NETWORK 22
RB13	1-233-448-11	s	RES, CHIP NETWORK 22
RB15	1-233-448-11	s	RES, CHIP NETWORK 22
RB18	1-233-448-11	s	RES, CHIP NETWORK 22
RB20	1-233-448-11	s	RES, CHIP NETWORK 22
RB22	1-233-448-11	s	RES, CHIP NETWORK 22
RB25	1-233-448-11	s	RES, CHIP NETWORK 22
RB26	1-233-448-11	s	RES, CHIP NETWORK 22
RB28	1-233-448-11	s	RES, CHIP NETWORK 22
RB31	1-233-448-11	s	RES, CHIP NETWORK 22
RB32	1-233-448-11	s	RES, CHIP NETWORK 22
RB34	1-233-448-11	s	RES, CHIP NETWORK 22
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB40	1-233-448-11	s	RES, CHIP NETWORK 22
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB49	1-233-448-11	s	RES, CHIP NETWORK 22
RB50	1-233-448-11	s	RES, CHIP NETWORK 22

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB51	1-233-448-11	s	RES, CHIP NETWORK 22
RB52	1-233-448-11	s	RES, CHIP NETWORK 22
RB53	1-233-448-11	s	RES, CHIP NETWORK 22
RB54	1-233-448-11	s	RES, CHIP NETWORK 22
RB55	1-233-448-11	s	RES, CHIP NETWORK 22
RB56	1-233-448-11	s	RES, CHIP NETWORK 22
RB57	1-233-448-11	s	RES, CHIP NETWORK 22
RB58	1-233-448-11	s	RES, CHIP NETWORK 22
RB59	1-233-448-11	s	RES, CHIP NETWORK 22
RB60	1-233-448-11	s	RES, CHIP NETWORK 22
RB61	1-233-448-11	s	RES, CHIP NETWORK 22
RB62	1-233-448-11	s	RES, CHIP NETWORK 22
RB63	1-233-448-11	s	RES, CHIP NETWORK 22
RB64	1-233-448-11	s	RES, CHIP NETWORK 22
RB65	1-233-448-11	s	RES, CHIP NETWORK 22
RB66	1-233-448-11	s	RES, CHIP NETWORK 22
RB67	1-233-448-11	s	RES, CHIP NETWORK 22
RB68	1-233-448-11	s	RES, CHIP NETWORK 22
RB69	1-233-448-11	s	RES, CHIP NETWORK 22
RB70	1-233-448-11	s	RES, CHIP NETWORK 22
RB71	1-233-448-11	s	RES, CHIP NETWORK 22
RB72	1-233-448-11	s	RES, CHIP NETWORK 22
RB73	1-233-448-11	s	RES, CHIP NETWORK 22
RB74	1-233-448-11	s	RES, CHIP NETWORK 22
RB75	1-233-448-11	s	RES, CHIP NETWORK 22
RB76	1-233-448-11	s	RES, CHIP NETWORK 22
RB77	1-233-448-11	s	RES, CHIP NETWORK 22
RB78	1-233-448-11	s	RES, CHIP NETWORK 22
RB79	1-233-448-11	s	RES, CHIP NETWORK 22
RB80	1-233-448-11	s	RES, CHIP NETWORK 22
RB81	1-233-448-11	s	RES, CHIP NETWORK 22
RB82	1-233-448-11	s	RES, CHIP NETWORK 22
RB83	1-233-448-11	s	RES, CHIP NETWORK 22
RB84	1-233-448-11	s	RES, CHIP NETWORK 22
RB85	1-233-448-11	s	RES, CHIP NETWORK 22
RB86	1-233-448-11	s	RES, CHIP NETWORK 22
RB87	1-233-448-11	s	RES, CHIP NETWORK 22
RB88	1-233-448-11	s	RES, CHIP NETWORK 22
RB89	1-233-448-11	s	RES, CHIP NETWORK 22
RB90	1-233-448-11	s	RES, CHIP NETWORK 22
RB91	1-233-448-11	s	RES, CHIP NETWORK 22
RB92	1-233-448-11	s	RES, CHIP NETWORK 22
RB93	1-233-448-11	s	RES, CHIP NETWORK 22
RB94	1-233-448-11	s	RES, CHIP NETWORK 22
RB95	1-233-448-11	s	RES, CHIP NETWORK 22
RB96	1-233-448-11	s	RES, CHIP NETWORK 22
RB97	1-233-448-11	s	RES, CHIP NETWORK 22
RB98	1-233-448-11	s	RES, CHIP NETWORK 22
RB100	1-233-448-11	s	RES, CHIP NETWORK 22
RB103	1-233-448-11	s	RES, CHIP NETWORK 22
RB104	1-233-448-11	s	RES, CHIP NETWORK 22
RB106	1-233-448-11	s	RES, CHIP NETWORK 22
RB109	1-233-448-11	s	RES, CHIP NETWORK 22
RB110	1-233-448-11	s	RES, CHIP NETWORK 22
RB111	1-233-448-11	s	RES, CHIP NETWORK 22
RB112	1-233-448-11	s	RES, CHIP NETWORK 22
RB113	1-233-448-11	s	RES, CHIP NETWORK 22
RB114	1-233-448-11	s	RES, CHIP NETWORK 22
RB115	1-233-448-11	s	RES, CHIP NETWORK 22

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB122	1-233-448-11	s	RES, CHIP NETWORK 22
RB123	1-233-448-11	s	RES, CHIP NETWORK 22
RB124	1-233-448-11	s	RES, CHIP NETWORK 22
RB125	1-233-448-11	s	RES, CHIP NETWORK 22
RB126	1-233-448-11	s	RES, CHIP NETWORK 22
RB127	1-233-448-11	s	RES, CHIP NETWORK 22
RB128	1-233-448-11	s	RES, CHIP NETWORK 22
RB129	1-233-448-11	s	RES, CHIP NETWORK 22
RB130	1-233-448-11	s	RES, CHIP NETWORK 22
RB131	1-233-448-11	s	RES, CHIP NETWORK 22
RB132	1-233-448-11	s	RES, CHIP NETWORK 22
RB133	1-233-448-11	s	RES, CHIP NETWORK 22
RB134	1-233-448-11	s	RES, CHIP NETWORK 22
RB135	1-233-448-11	s	RES, CHIP NETWORK 22
RB136	1-233-448-11	s	RES, CHIP NETWORK 22
RB137	1-233-448-11	s	RES, CHIP NETWORK 22
RB138	1-233-448-11	s	RES, CHIP NETWORK 22
RB139	1-233-448-11	s	RES, CHIP NETWORK 22
RB140	1-233-448-11	s	RES, CHIP NETWORK 22
RB141	1-233-448-11	s	RES, CHIP NETWORK 22
RB142	1-233-448-11	s	RES, CHIP NETWORK 22
RB143	1-233-448-11	s	RES, CHIP NETWORK 22
RB144	1-233-448-11	s	RES, CHIP NETWORK 22
RB145	1-233-448-11	s	RES, CHIP NETWORK 22
RB146	1-233-448-11	s	RES, CHIP NETWORK 22
RB147	1-233-448-11	s	RES, CHIP NETWORK 22
RB148	1-233-448-11	s	RES, CHIP NETWORK 22
RB149	1-233-448-11	s	RES, CHIP NETWORK 22
RB150	1-233-448-11	s	RES, CHIP NETWORK 22
RB151	1-233-448-11	s	RES, CHIP NETWORK 22
RB152	1-233-448-11	s	RES, CHIP NETWORK 22
RB153	1-233-448-11	s	RES, CHIP NETWORK 22
RB154	1-233-448-11	s	RES, CHIP NETWORK 22
RB155	1-233-448-11	s	RES, CHIP NETWORK 22
RB156	1-233-448-11	s	RES, CHIP NETWORK 22
RB157	1-233-448-11	s	RES, CHIP NETWORK 22
RB158	1-233-448-11	s	RES, CHIP NETWORK 22
RB159	1-233-448-11	s	RES, CHIP NETWORK 22
RB161	1-233-448-11	s	RES, CHIP NETWORK 22
RB165	1-233-448-11	s	RES, CHIP NETWORK 22
RB166	1-233-448-11	s	RES, CHIP NETWORK 22
RB168	1-233-448-11	s	RES, CHIP NETWORK 22
RB171	1-233-448-11	s	RES, CHIP NETWORK 22
RB172	1-233-448-11	s	RES, CHIP NETWORK 22
RB173	1-233-448-11	s	RES, CHIP NETWORK 22
RB174	1-233-448-11	s	RES, CHIP NETWORK 22
RB175	1-233-448-11	s	RES, CHIP NETWORK 22
RB176	1-233-448-11	s	RES, CHIP NETWORK 22
RB183	1-233-448-11	s	RES, CHIP NETWORK 22
RB184	1-233-448-11	s	RES, CHIP NETWORK 22
RB185	1-233-448-11	s	RES, CHIP NETWORK 22
RB186	1-233-448-11	s	RES, CHIP NETWORK 22
RB187	1-233-448-11	s	RES, CHIP NETWORK 22
RB189	1-233-448-11	s	RES, CHIP NETWORK 22
RB190	1-233-448-11	s	RES, CHIP NETWORK 22
RB191	1-233-448-11	s	RES, CHIP NETWORK 22
RB192	1-233-448-11	s	RES, CHIP NETWORK 22
RB194	1-233-448-11	s	RES, CHIP NETWORK 22
RB195	1-233-448-11	s	RES, CHIP NETWORK 22

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB196	1-233-448-11	s	RES, CHIP NETWORK 22
RB197	1-233-448-11	s	RES, CHIP NETWORK 22
RB198	1-233-448-11	s	RES, CHIP NETWORK 22
RB199	1-233-448-11	s	RES, CHIP NETWORK 22
RB200	1-233-448-11	s	RES, CHIP NETWORK 22
RB201	1-233-448-11	s	RES, CHIP NETWORK 22
RB202	1-233-448-11	s	RES, CHIP NETWORK 22
RB203	1-233-448-11	s	RES, CHIP NETWORK 22
RB204	1-233-448-11	s	RES, CHIP NETWORK 22
RB205	1-233-448-11	s	RES, CHIP NETWORK 22
RB206	1-233-448-11	s	RES, CHIP NETWORK 22
RB207	1-233-448-11	s	RES, CHIP NETWORK 22
RB208	1-233-448-11	s	RES, CHIP NETWORK 22
RB209	1-233-448-11	s	RES, CHIP NETWORK 22
RB210	1-233-448-11	s	RES, CHIP NETWORK 22
RB211	1-233-448-11	s	RES, CHIP NETWORK 22
RB212	1-233-448-11	s	RES, CHIP NETWORK 22
RB213	1-233-448-11	s	RES, CHIP NETWORK 22
RB214	1-233-448-11	s	RES, CHIP NETWORK 22
RB215	1-233-448-11	s	RES, CHIP NETWORK 22
RB216	1-233-448-11	s	RES, CHIP NETWORK 22
RB217	1-233-448-11	s	RES, CHIP NETWORK 22
RB218	1-233-448-11	s	RES, CHIP NETWORK 22
RB222	1-233-448-11	s	RES, CHIP NETWORK 22
RB223	1-233-448-11	s	RES, CHIP NETWORK 22
RB224	1-233-448-11	s	RES, CHIP NETWORK 22
RB301	1-233-448-11	s	RES, CHIP NETWORK 22 (for 24P system)
RB302	1-233-448-11	s	RES, CHIP NETWORK 22 (for 24P system)
RB303	1-233-448-11	s	RES, CHIP NETWORK 22 (for 24P system)
RB400	1-233-448-11	s	RES, CHIP NETWORK 22
RB401	1-233-448-11	s	RES, CHIP NETWORK 22
RB402	1-233-448-11	s	RES, CHIP NETWORK 22
RB403	1-233-448-11	s	RES, CHIP NETWORK 22
RB404	1-233-448-11	s	RES, CHIP NETWORK 22
RB405	1-233-448-11	s	RES, CHIP NETWORK 22
RB406	1-233-448-11	s	RES, CHIP NETWORK 22
RB407	1-233-448-11	s	RES, CHIP NETWORK 22
RB408	1-233-448-11	s	RES, CHIP NETWORK 22
RB409	1-233-448-11	s	RES, CHIP NETWORK 22
RB410	1-233-448-11	s	RES, CHIP NETWORK 22
RB411	1-233-448-11	s	RES, CHIP NETWORK 22
RB412	1-233-448-11	s	RES, CHIP NETWORK 22
RB413	1-233-448-11	s	RES, CHIP NETWORK 22
RB414	1-233-448-11	s	RES, CHIP NETWORK 22
RB415	1-233-448-11	s	RES, CHIP NETWORK 22
RB420	1-233-448-11	s	RES, CHIP NETWORK 22
RB421	1-233-448-11	s	RES, CHIP NETWORK 22
RB422	1-233-448-11	s	RES, CHIP NETWORK 22
RB423	1-233-448-11	s	RES, CHIP NETWORK 22
RB3000	1-233-938-11	s	RES, CHIP NETWORK 470
RB3001	1-233-938-11	s	RES, CHIP NETWORK 470
RB3002	1-233-938-11	s	RES, CHIP NETWORK 470
RB3003	1-233-938-11	s	RES, CHIP NETWORK 470
RB3004	1-233-938-11	s	RES, CHIP NETWORK 470
RB3005	1-233-938-11	s	RES, CHIP NETWORK 470
RB3006	1-233-938-11	s	RES, CHIP NETWORK 470

(OUT-20 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3007	1-233-938-11	s	RES, CHIP NETWORK 470
RB3008	1-233-938-11	s	RES, CHIP NETWORK 470
RB3009	1-233-938-11	s	RES, CHIP NETWORK 470
RB3010	1-233-938-11	s	RES, CHIP NETWORK 470
RB3011	1-233-938-11	s	RES, CHIP NETWORK 470
RB3012	1-233-938-11	s	RES, CHIP NETWORK 470
RB3013	1-233-938-11	s	RES, CHIP NETWORK 470
RB3014	1-233-938-11	s	RES, CHIP NETWORK 470
RB3015	1-233-938-11	s	RES, CHIP NETWORK 470
RB3016	1-233-938-11	s	RES, CHIP NETWORK 470
RB3017	1-233-938-11	s	RES, CHIP NETWORK 470
RB3018	1-233-938-11	s	RES, CHIP NETWORK 470
RB3019	1-233-938-11	s	RES, CHIP NETWORK 470
RB3020	1-233-938-11	s	RES, CHIP NETWORK 470
RB3021	1-233-938-11	s	RES, CHIP NETWORK 470
RB3022	1-233-938-11	s	RES, CHIP NETWORK 470
RB3023	1-233-938-11	s	RES, CHIP NETWORK 470
RB3024	1-233-938-11	s	RES, CHIP NETWORK 470
RB3025	1-233-938-11	s	RES, CHIP NETWORK 470
RB3026	1-233-938-11	s	RES, CHIP NETWORK 470
RB3027	1-233-938-11	s	RES, CHIP NETWORK 470
RB3028	1-233-938-11	s	RES, CHIP NETWORK 470
RB3029	1-233-938-11	s	RES, CHIP NETWORK 470

RE-194 BOARD (HKDS-7690A)

Ref. No. or Q'ty	Part No.	SP	Description
C124	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C125	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C126	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C127	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C128	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C129	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C130	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C132	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C133	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C134	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C135	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C136	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C137	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
C138	1-125-601-11	s	CAPACITOR, ELECT 470MF/450V
CP101	1-476-195-11	s	AC-DC INVERTER UNIT
CP102	1-476-195-11	s	AC-DC INVERTER UNIT
CP103	1-476-195-11	s	AC-DC INVERTER UNIT
CP104	1-476-195-11	s	AC-DC INVERTER UNIT
CP105	1-476-195-11	s	AC-DC INVERTER UNIT
CP106	1-476-195-11	s	AC-DC INVERTER UNIT
CP107	1-476-195-11	s	AC-DC INVERTER UNIT
CP108	1-476-195-11	s	AC-DC INVERTER UNIT
PS101	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS102	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS103	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS104	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS105	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS106	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS107	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)
PS108	⚠ 1-533-714-11	s	FUSE 10A (L=30MM)

RE-196 BORAD (HKDS-7690A)

Ref. No. or Q'ty	Part No.	SP	Description
CP202	1-476-200-11	s	DC-DC CONVERTER (UNIT)
CP203	1-476-200-11	s	DC-DC CONVERTER (UNIT)
CP204	1-476-200-11	s	DC-DC CONVERTER (UNIT)
CP205	1-476-200-11	s	DC-DC CONVERTER (UNIT)
CP206	1-476-200-11	s	DC-DC CONVERTER (UNIT)
CP207	1-476-197-11	s	DC-DC CONVERTER (UNIT)
CP208	1-476-199-11	s	DC-DC CONVERTER (UNIT)
CP210	1-476-199-11	s	DC-DC CONVERTER (UNIT)
CP212	1-476-196-11	s	DC-DC CONVERTER (UNIT)
CP213	1-476-197-11	s	DC-DC CONVERTER (UNIT)
CP214	1-476-198-11	s	DC-DC CONVERTER (UNIT)
F202	⚠ 1-533-708-11	s	FUSE
F203	⚠ 1-533-708-11	s	FUSE
F204	⚠ 1-533-708-11	s	FUSE
F205	⚠ 1-533-708-11	s	FUSE
F206	⚠ 1-533-708-11	s	FUSE
F207	⚠ 1-533-708-11	s	FUSE
F208	⚠ 1-533-708-11	s	FUSE
F210	⚠ 1-533-708-11	s	FUSE
F212	⚠ 1-533-708-11	s	FUSE
F213	⚠ 1-533-708-11	s	FUSE
F214	⚠ 1-533-708-11	s	FUSE
F215	⚠ 1-533-275-21	s	FUSE, CHIP

RX-35 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

If requiring the RX-35 board, please purchase HK-102.

RX-46 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

If requiring the RX-46 board, please purchase HK-202.

TX-52 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

If requiring the TX-52 board, please purchase HK-101.

TX-68 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

If requiring the TX-68 board, please purchase HK-201.

VSW-33 BOARD

*a:[Lot No. 710 - 805]
*b:[Lot No. 806 -]
*c:[Lot No. 802 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-483-A	o	MOUNTED CIRCUIT BOARD, VSW-33
1pc	A-8344-381-A	s	MOUNTED CIRCUIT BOARD, VSW-33A (for 24P system)
2pcs	3-194-878-01	s	LEVER, PC BOARD
14pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
10pcs	7-621-773-87	s	SCREW +B 2.6x10
2pcs	7-622-207-05	s	N 2.6, TYPE 2
2pcs	7-626-320-11	s	PIN, SPRING 3x8
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-038-00	s	CERAMIC 0.1uF 25V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7	1-163-038-00	s	CERAMIC 0.1uF 25V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-163-038-00	s	CERAMIC 0.1uF 25V
C25	1-163-038-00	s	CERAMIC 0.1uF 25V
C26	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C27	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C28	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C29	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C30	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C31	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C32	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C33	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C34	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-117-372-11	s	TANTALUM 100uF 20% 10V
C38	1-117-372-11	s	TANTALUM 100uF 20% 10V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C43	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C45	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C46	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C47	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C48	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C49	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C50	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C53	1-163-038-00	s	CERAMIC 0.1uF 25V
C54	1-163-038-00	s	CERAMIC 0.1uF 25V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-038-00	s	CERAMIC 0.1uF 25V
C74	1-163-038-00	s	CERAMIC 0.1uF 25V
C75	1-163-038-00	s	CERAMIC 0.1uF 25V
C76	1-163-038-00	s	CERAMIC 0.1uF 25V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-038-00	s	CERAMIC 0.1uF 25V
C80	1-163-038-00	s	CERAMIC 0.1uF 25V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-038-00	s	CERAMIC 0.1uF 25V
C85	1-163-038-00	s	CERAMIC 0.1uF 25V
C86	1-163-038-00	s	CERAMIC 0.1uF 25V
C87	1-163-038-00	s	CERAMIC 0.1uF 25V
C88	1-163-038-00	s	CERAMIC 0.1uF 25V
C89	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-038-00	s	CERAMIC 0.1uF 25V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-163-038-00	s	CERAMIC 0.1uF 25V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C105	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C106	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C107	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C108	1-163-038-00	s	CERAMIC 0.1uF 25V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-038-00	s	CERAMIC 0.1uF 25V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-163-038-00	s	CERAMIC 0.1uF 25V
C119	1-163-038-00	s	CERAMIC 0.1uF 25V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C126	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-038-00	s	CERAMIC 0.1uF 25V
C133	1-163-038-00	s	CERAMIC 0.1uF 25V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-038-00	s	CERAMIC 0.1uF 25V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C138	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-038-00	s	CERAMIC 0.1uF 25V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V
C164	1-163-038-00	s	CERAMIC 0.1uF 25V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C165	1-163-038-00	s	CERAMIC 0.1uF 25V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-038-00	s	CERAMIC 0.1uF 25V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-038-00	s	CERAMIC 0.1uF 25V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-038-00	s	CERAMIC 0.1uF 25V
C215	1-163-038-00	s	CERAMIC 0.1uF 25V
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-038-00	s	CERAMIC 0.1uF 25V
C220	1-163-038-00	s	CERAMIC 0.1uF 25V
C221	1-163-038-00	s	CERAMIC 0.1uF 25V
C222	1-163-038-00	s	CERAMIC 0.1uF 25V
C223	1-163-038-00	s	CERAMIC 0.1uF 25V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-038-00	s	CERAMIC 0.1uF 25V
C226	1-163-038-00	s	CERAMIC 0.1uF 25V
C227	1-163-038-00	s	CERAMIC 0.1uF 25V
C228	1-163-038-00	s	CERAMIC 0.1uF 25V
C229	1-163-038-00	s	CERAMIC 0.1uF 25V
C230	1-163-038-00	s	CERAMIC 0.1uF 25V
C231	1-163-038-00	s	CERAMIC 0.1uF 25V
C232	1-163-038-00	s	CERAMIC 0.1uF 25V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-038-00	s	CERAMIC 0.1uF 25V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C242	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C243	1-163-038-00	s	CERAMIC 0.1uF 25V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-038-00	s	CERAMIC 0.1uF 25V
C250	1-163-038-00	s	CERAMIC 0.1uF 25V
C251	1-163-038-00	s	CERAMIC 0.1uF 25V
C252	1-163-038-00	s	CERAMIC 0.1uF 25V
C253	1-163-038-00	s	CERAMIC 0.1uF 25V
C254	1-163-038-00	s	CERAMIC 0.1uF 25V
C255	1-163-038-00	s	CERAMIC 0.1uF 25V
C256	1-163-038-00	s	CERAMIC 0.1uF 25V
C257	1-163-038-00	s	CERAMIC 0.1uF 25V
C258	1-126-396-11	s	ELECT, CHIP 47uF 20% 16V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C261	1-163-038-00	s	CERAMIC 0.1uF 25V
C262	1-163-038-00	s	CERAMIC 0.1uF 25V
C263	1-163-038-00	s	CERAMIC 0.1uF 25V
C264	1-163-038-00	s	CERAMIC 0.1uF 25V
C265	1-163-038-00	s	CERAMIC 0.1uF 25V
C266	1-163-038-00	s	CERAMIC 0.1uF 25V
C267	1-163-038-00	s	CERAMIC 0.1uF 25V
C268	1-163-038-00	s	CERAMIC 0.1uF 25V
C269	1-163-038-00	s	CERAMIC 0.1uF 25V
C270	1-163-038-00	s	CERAMIC 0.1uF 25V
C271	1-163-038-00	s	CERAMIC 0.1uF 25V
C272	1-163-038-00	s	CERAMIC 0.1uF 25V
C273	1-163-038-00	s	CERAMIC 0.1uF 25V
C274	1-163-038-00	s	CERAMIC 0.1uF 25V
C275	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-038-00	s	CERAMIC 0.1uF 25V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-038-00	s	CERAMIC 0.1uF 25V
C279	1-163-038-00	s	CERAMIC 0.1uF 25V
C280	1-163-038-00	s	CERAMIC 0.1uF 25V
C281	1-163-038-00	s	CERAMIC 0.1uF 25V
C282	1-163-038-00	s	CERAMIC 0.1uF 25V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C283	1-163-038-00	s	CERAMIC 0.1uF 25V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-038-00	s	CERAMIC 0.1uF 25V
C292	1-163-038-00	s	CERAMIC 0.1uF 25V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-038-00	s	CERAMIC 0.1uF 25V
C299	1-163-038-00	s	CERAMIC 0.1uF 25V
C300	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C301	1-163-021-91	s	CERAMIC 0.01uF 10% 50V
C302	1-163-038-00	s	CERAMIC 0.1uF 25V
*c C303	1-163-038-00	s	CERAMIC 0.1uF 25V
C314	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C329	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C330	1-163-038-00	s	CERAMIC 0.1uF 25V
C331	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C332	1-163-038-00	s	CERAMIC 0.1uF 25V
C333	1-163-038-00	s	CERAMIC 0.1uF 25V
C334	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C335	1-163-038-00	s	CERAMIC 0.1uF 25V
C336	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C345	1-117-372-11	s	TANTALUM 100uF 20% 10V
C346	1-117-372-11	s	TANTALUM 100uF 20% 10V
C347	1-117-372-11	s	TANTALUM 100uF 20% 10V
C348	1-117-372-11	s	TANTALUM 100uF 20% 10V
C349	1-163-038-00	s	CERAMIC 0.1uF 25V
C350	1-117-372-11	s	TANTALUM 100uF 20% 10V
C351	1-117-372-11	s	TANTALUM 100uF 20% 10V
C352	1-117-372-11	s	TANTALUM 100uF 20% 10V
C353	1-117-372-11	s	TANTALUM 100uF 20% 10V
C398	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C399	1-163-038-00	s	CERAMIC 0.1uF 25V
C400	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C401	1-163-038-00	s	CERAMIC 0.1uF 25V
C402	1-163-038-00	s	CERAMIC 0.1uF 25V
C403	1-117-372-11	s	TANTALUM 100uF 20% 10V
C404	1-117-372-11	s	TANTALUM 100uF 20% 10V
C405	1-163-038-00	s	CERAMIC 0.1uF 25V
C406	1-163-038-00	s	CERAMIC 0.1uF 25V
C407	1-117-372-11	s	TANTALUM 100uF 20% 10V
C408	1-117-372-11	s	TANTALUM 100uF 20% 10V
C409	1-117-372-11	s	TANTALUM 100uF 20% 10V
C410	1-117-372-11	s	TANTALUM 100uF 20% 10V
C411	1-163-038-00	s	CERAMIC 0.1uF 25V
C412	1-163-038-00	s	CERAMIC 0.1uF 25V
C413	1-163-038-00	s	CERAMIC 0.1uF 25V
C414	1-117-372-11	s	TANTALUM 100uF 20% 10V
C449	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C450	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C451	1-163-038-00	s	CERAMIC 0.1uF 25V
C452	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C453	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C454	1-163-038-00	s	CERAMIC 0.1uF 25V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C455	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C456	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C457	1-163-038-00	s	CERAMIC 0.1uF 25V
C458	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C459	1-163-038-00	s	CERAMIC 0.1uF 25V
C460	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C461	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C462	1-163-038-00	s	CERAMIC 0.1uF 25V
C463	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C464	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C465	1-163-038-00	s	CERAMIC 0.1uF 25V
C466	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C467	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C468	1-163-038-00	s	CERAMIC 0.1uF 25V
C469	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C470	1-163-038-00	s	CERAMIC 0.1uF 25V
C471	1-163-038-00	s	CERAMIC 0.1uF 25V
C472	1-117-372-11	s	TANTALUM 100uF 20% 10V
C473	1-117-372-11	s	TANTALUM 100uF 20% 10V
C474	1-117-372-11	s	TANTALUM 100uF 20% 10V
C475	1-117-372-11	s	TANTALUM 100uF 20% 10V
C476	1-117-372-11	s	TANTALUM 100uF 20% 10V
C477	1-117-372-11	s	TANTALUM 100uF 20% 10V
C478	1-117-372-11	s	TANTALUM 100uF 20% 10V
C525	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C526	1-163-038-00	s	CERAMIC 0.1uF 25V
C561	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C567	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C568	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C583	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C598	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C619	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C620	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C621	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C622	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C623	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C644	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C645	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V
C646	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C647	1-163-038-00	s	CERAMIC 0.1uF 25V
C648	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C695	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C696	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C697	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C698	1-163-038-00	s	CERAMIC 0.1uF 25V
C699	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C717	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C718	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C723	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C778	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C800	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C821	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C822	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C863	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C864	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C873	1-117-372-11	s	TANTALUM 100uF 20% 10V
C874	1-117-372-11	s	TANTALUM 100uF 20% 10V
C875	1-117-372-11	s	TANTALUM 100uF 20% 10V
C876	1-117-372-11	s	TANTALUM 100uF 20% 10V

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C877	1-117-372-11	s	TANTALUM 100uF 20% 10V
C878	1-117-372-11	s	TANTALUM 100uF 20% 10V
C879	1-117-372-11	s	TANTALUM 100uF 20% 10V
C910	1-117-372-11	s	TANTALUM 100uF 20% 10V
C911	1-117-372-11	s	TANTALUM 100uF 20% 10V
C912	1-117-372-11	s	TANTALUM 100uF 20% 10V
C913	1-117-372-11	s	TANTALUM 100uF 20% 10V
C914	1-117-372-11	s	TANTALUM 100uF 20% 10V
C924	1-117-372-11	s	TANTALUM 100uF 20% 10V
C942	1-163-038-00	s	CERAMIC 0.1uF 25V
C943	1-163-038-00	s	CERAMIC 0.1uF 25V
CN1	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
D1	8-719-029-30	s	DIODE BAS16-215
D2	8-719-029-30	s	DIODE BAS16-215
D3	8-719-029-30	s	DIODE BAS16-215
D4	8-719-029-30	s	DIODE BAS16-215
D5	8-719-029-30	s	DIODE BAS16-215
D6	8-719-029-30	s	DIODE BAS16-215
D7	8-719-029-30	s	DIODE BAS16-215
D8	8-719-029-30	s	DIODE BAS16-215
D9	8-719-029-30	s	DIODE BAS16-215
D10	8-719-029-30	s	DIODE BAS16-215
D11	8-719-029-30	s	DIODE BAS16-215
D12	8-719-029-30	s	DIODE BAS16-215
D13	8-719-029-30	s	DIODE BAS16-215
D14	8-719-029-30	s	DIODE BAS16-215
D15	8-719-029-30	s	DIODE BAS16-215
D16	8-719-029-30	s	DIODE BAS16-215
D17	8-719-029-30	s	DIODE BAS16-215
D18	8-719-029-30	s	DIODE BAS16-215
D19	8-719-029-30	s	DIODE BAS16-215
D20	8-719-029-30	s	DIODE BAS16-215
D21	8-719-029-30	s	DIODE BAS16-215
D22	8-719-029-30	s	DIODE BAS16-215
D23	8-719-029-30	s	DIODE BAS16-215
D24	8-719-029-30	s	DIODE BAS16-215
D25	8-719-029-30	s	DIODE BAS16-215
D26	8-719-029-30	s	DIODE BAS16-215
D27	8-719-029-30	s	DIODE BAS16-215
D28	8-719-029-30	s	DIODE BAS16-215
D29	8-719-029-30	s	DIODE BAS16-215
D30	8-719-029-30	s	DIODE BAS16-215
D31	8-719-029-30	s	DIODE BAS16-215
D32	8-719-029-30	s	DIODE BAS16-215
D33	8-719-029-30	s	DIODE BAS16-215
D34	8-719-029-30	s	DIODE BAS16-215
D35	8-719-029-30	s	DIODE BAS16-215
D36	8-719-029-30	s	DIODE BAS16-215
D37	8-719-029-30	s	DIODE BAS16-215
D38	8-719-029-30	s	DIODE BAS16-215
D39	8-719-975-84	s	DIODE AY1101W-88
D40	8-719-975-84	s	DIODE AY1101W-88
D41	8-719-029-30	s	DIODE BAS16-215
D42	8-719-029-30	s	DIODE BAS16-215
D43	8-719-029-30	s	DIODE BAS16-215
D44	8-719-029-30	s	DIODE BAS16-215
D45	8-719-029-30	s	DIODE BAS16-215

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D46	8-719-029-30	s	DIODE BAS16-215
D47	8-719-029-30	s	DIODE BAS16-215
D48	8-719-029-30	s	DIODE BAS16-215
D49	8-719-029-30	s	DIODE BAS16-215
D50	8-719-029-30	s	DIODE BAS16-215
D51	8-719-029-30	s	DIODE BAS16-215
D52	8-719-029-30	s	DIODE BAS16-215
D53	8-719-029-30	s	DIODE BAS16-215
D54	8-719-029-30	s	DIODE BAS16-215
D55	8-719-029-30	s	DIODE BAS16-215
D56	8-719-029-30	s	DIODE BAS16-215
D57	8-719-029-30	s	DIODE BAS16-215
D58	8-719-029-30	s	DIODE BAS16-215
D59	8-719-029-30	s	DIODE BAS16-215
D60	8-719-029-30	s	DIODE BAS16-215
D61	8-719-029-30	s	DIODE BAS16-215
D62	8-719-029-30	s	DIODE BAS16-215
D63	8-719-029-30	s	DIODE BAS16-215
D64	8-719-029-30	s	DIODE BAS16-215
D65	8-719-029-30	s	DIODE BAS16-215
D66	8-719-029-30	s	DIODE BAS16-215
D67	8-719-029-30	s	DIODE BAS16-215
D68	8-719-029-30	s	DIODE BAS16-215
D69	8-719-029-30	s	DIODE BAS16-215
D70	8-719-029-30	s	DIODE BAS16-215
D71	8-719-029-30	s	DIODE BAS16-215
D72	8-719-029-30	s	DIODE BAS16-215
D73	8-719-029-30	s	DIODE BAS16-215
D74	8-719-029-30	s	DIODE BAS16-215
D75	8-719-029-30	s	DIODE BAS16-215
D76	8-719-029-30	s	DIODE BAS16-215
D77	8-719-029-30	s	DIODE BAS16-215
D78	8-719-029-30	s	DIODE BAS16-215
E21	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E22	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E23	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E24	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E25	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E26	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E27	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E28	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E29	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E30	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E31	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E32	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E33	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E34	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
E35	1-535-877-22	o	CHIP, CHECKER (TEST POINT)
F1 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F2 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F3 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
F4 *b ⚠	1-533-843-21	s	FUSE, CHIP 10A 125V
*a ⚠	1-533-707-11	s	CIRCUIT PROTECTOR 10A(CHIP)
FB1	1-543-256-11	s	BEAD, FERRITE
FB2	1-543-256-11	s	BEAD, FERRITE

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1	8-759-465-49	s	IC MC10ELT21DR2
IC3	8-759-523-49	s	IC TC74ACT541FT(EL)
IC4 *c	8-759-464-48	s	IC CXD8900J
IC5 *c	8-759-464-48	s	IC CXD8900J
IC6 *c	8-759-464-48	s	IC CXD8900J
IC7 *c	8-759-464-48	s	IC CXD8900J
IC8 *c	8-759-464-48	s	IC CXD8900J
IC9 *c	8-759-464-48	s	IC CXD8900J
IC10 *c	8-759-464-48	s	IC CXD8900J
IC11 *c	8-759-464-48	s	IC CXD8900J
IC12 *c	8-759-464-48	s	IC CXD8900J
IC13 *c	8-759-464-48	s	IC CXD8900J
IC14 *c	8-759-464-48	s	IC CXD8900J
IC15 *c	8-759-464-48	s	IC CXD8900J
IC16 *c	8-759-464-48	s	IC CXD8900J
IC17 *c	8-759-464-48	s	IC CXD8900J
IC18 *c	8-759-464-48	s	IC CXD8900J
IC19 *c	8-759-464-48	s	IC CXD8900J
IC20 *c	8-759-464-48	s	IC CXD8900J
IC21	8-759-466-21	s	IC S4405B-80
IC22	8-759-456-26	s	IC 74LCX541MTCX
IC23 *c	8-759-464-48	s	IC CXD8900J
IC24 *c	8-759-464-48	s	IC CXD8900J
IC25 *c	8-759-464-48	s	IC CXD8900J
IC26 *c	8-759-464-48	s	IC CXD8900J
IC27 *c	8-759-464-48	s	IC CXD8900J
IC28 *c	8-759-464-48	s	IC CXD8900J
IC29 *c	8-759-464-48	s	IC CXD8900J
IC30 *c	8-759-464-48	s	IC CXD8900J
IC31 *c	8-759-464-48	s	IC CXD8900J
IC32 *c	8-759-464-48	s	IC CXD8900J
IC33 *c	8-759-464-48	s	IC CXD8900J
IC34 *c	8-759-464-48	s	IC CXD8900J
IC35 *c	8-759-464-48	s	IC CXD8900J
IC36 *c	8-759-464-48	s	IC CXD8900J
IC37 *c	8-759-464-48	s	IC CXD8900J
IC38 *c	8-759-464-48	s	IC CXD8900J
IC39 *c	8-759-464-48	s	IC CXD8900J
IC40	8-759-456-26	s	IC 74LCX541MTCX
IC41 *c	8-759-464-48	s	IC CXD8900J
IC42 *c	8-759-464-48	s	IC CXD8900J
IC43 *c	8-759-464-48	s	IC CXD8900J
IC44 *c	8-759-464-48	s	IC CXD8900J
IC45 *c	8-759-464-48	s	IC CXD8900J
IC46 *c	8-759-464-48	s	IC CXD8900J
IC47 *c	8-759-464-48	s	IC CXD8900J
IC48 *c	8-759-464-48	s	IC CXD8900J
IC49 *c	8-759-464-48	s	IC CXD8900J
IC50	8-759-389-48	s	IC 74LCX16374MTDX
IC51	8-759-466-59	s	IC CGS2535TVX
IC52 *c	8-759-464-48	s	IC CXD8900J
IC53 *c	8-759-464-48	s	IC CXD8900J
IC54 *c	8-759-464-48	s	IC CXD8900J
IC55 *c	8-759-464-48	s	IC CXD8900J
IC56 *c	8-759-464-48	s	IC CXD8900J
IC57 *c	8-759-464-48	s	IC CXD8900J
IC58 *c	8-759-464-48	s	IC CXD8900J
IC59 *c	8-759-464-48	s	IC CXD8900J
IC60	8-759-271-78	s	IC DS26C32ATM

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC61	8-759-456-26	s	IC 74LCX541MTCX
IC62 *c	8-759-464-48	s	IC CXD8900J
IC63 *c	8-759-464-48	s	IC CXD8900J
IC64 *c	8-759-464-48	s	IC CXD8900J
IC65 *c	8-759-464-48	s	IC CXD8900J
IC66 *c	8-759-464-48	s	IC CXD8900J
IC67 *c	8-759-464-48	s	IC CXD8900J
IC68 *c	8-759-464-48	s	IC CXD8900J
IC69 *c	8-759-464-48	s	IC CXD8900J
IC70 *c	8-759-464-48	s	IC CXD8900J
IC71 *c	8-759-464-48	s	IC CXD8900J
IC72	8-759-389-48	s	IC 74LCX16374MTDX
IC73	8-759-466-59	s	IC CGS2535TVX
IC74 *c	8-759-464-48	s	IC CXD8900J
IC75 *c	8-759-464-48	s	IC CXD8900J
IC76 *c	8-759-464-48	s	IC CXD8900J
IC77 *c	8-759-464-48	s	IC CXD8900J
IC78 *c	8-759-464-48	s	IC CXD8900J
IC79 *c	8-759-464-48	s	IC CXD8900J
IC80 *c	8-759-464-48	s	IC CXD8900J
IC81 *c	8-759-464-48	s	IC CXD8900J
IC82 *c	8-759-464-48	s	IC CXD8900J
IC83 *c	8-759-464-48	s	IC CXD8900J
IC84 *c	8-759-464-48	s	IC CXD8900J
IC85 *c	8-759-464-48	s	IC CXD8900J
IC86 *c	8-759-464-48	s	IC CXD8900J
IC87 *c	8-759-464-48	s	IC CXD8900J
IC88 *c	8-759-464-48	s	IC CXD8900J
IC89 *c	8-759-464-48	s	IC CXD8900J
IC90 *c	8-759-464-48	s	IC CXD8900J
IC91 *c	8-759-464-48	s	IC CXD8900J
IC92 *c	8-759-464-48	s	IC CXD8900J
IC93 *c	8-759-464-48	s	IC CXD8900J
IC94 *c	8-759-464-48	s	IC CXD8900J
IC95 *c	8-759-464-48	s	IC CXD8900J
IC96 *c	8-759-464-48	s	IC CXD8900J
IC97 *c	8-759-464-48	s	IC CXD8900J
IC98	8-759-505-00	s	IC CXD8052Q
IC99	8-759-389-26	s	IC 74LCX08MTCX
IC100	8-759-469-98	s	IC CAT93C66K-LE10
IC102	8-759-271-82	s	IC DS3695ATM
IC103	8-759-505-00	s	IC CXD8052Q
IC104	8-759-456-26	s	IC 74LCX541MTCX
IC105	8-759-456-26	s	IC 74LCX541MTCX
IC106	8-759-523-49	s	IC TC74ACT541FT(EL)
IC107	8-759-464-47	s	IC CXD8893J
IC108	8-759-464-47	s	IC CXD8893J
IC109	8-759-464-47	s	IC CXD8893J
IC110	8-759-464-47	s	IC CXD8893J
IC111	8-759-464-47	s	IC CXD8893J
IC112	8-759-464-47	s	IC CXD8893J
IC113	8-759-464-47	s	IC CXD8893J
IC114	8-759-524-50	s	IC TC74VHC541FT(EL)
IC115	8-759-524-50	s	IC TC74VHC541FT(EL)
IC116	8-759-456-26	s	IC 74LCX541MTCX
IC117	8-759-464-47	s	IC CXD8893J
IC118	8-759-464-47	s	IC CXD8893J
IC119	8-759-464-47	s	IC CXD8893J
IC120	8-759-464-47	s	IC CXD8893J

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC121	8-759-464-47	s	IC CXD8893J
IC122	8-759-464-47	s	IC CXD8893J
IC123	8-759-464-47	s	IC CXD8893J
IC124 *c	8-759-464-48	s	IC CXD8900J
IC127 *c	8-759-464-48	s	IC CXD8900J
IC128 *c	8-759-464-48	s	IC CXD8900J
IC130	8-759-464-47	s	IC CXD8893J
IC131	8-759-464-47	s	IC CXD8893J
IC132	8-759-464-47	s	IC CXD8893J
IC133	8-759-464-47	s	IC CXD8893J
IC134	8-759-464-47	s	IC CXD8893J
IC135	8-759-464-47	s	IC CXD8893J
IC136	8-759-464-47	s	IC CXD8893J
IC141	8-759-466-63	s	IC CXD8895Q
IC143	8-759-464-47	s	IC CXD8893J
IC144	8-759-464-47	s	IC CXD8893J
IC145	8-759-464-47	s	IC CXD8893J
IC146	8-759-464-47	s	IC CXD8893J
IC147	8-759-464-47	s	IC CXD8893J
IC148	8-759-464-47	s	IC CXD8893J
IC149	8-759-464-47	s	IC CXD8893J
IC152	8-759-527-57	s	IC SN74ABT16823DGGR
IC153	8-759-389-48	s	IC 74LCX16374MTDX
IC158	8-759-464-47	s	IC CXD8893J
IC159	8-759-464-47	s	IC CXD8893J
IC160	8-759-464-47	s	IC CXD8893J
IC161	8-759-464-47	s	IC CXD8893J
IC162	8-759-464-47	s	IC CXD8893J
IC163	8-759-464-47	s	IC CXD8893J
IC164	8-759-464-47	s	IC CXD8893J
IC166	8-759-439-44	s	IC CXD9024Q
IC200	8-759-389-48	s	IC 74LCX16374MTDX
IC201	8-759-386-26	s	IC 74LCX574MTCX
IC202	8-759-468-08	s	IC 74LVX3L384QSCX
IC203	8-759-468-08	s	IC 74LVX3L384QSCX
IC204	8-759-468-08	s	IC 74LVX3L384QSCX
IC205	8-759-468-08	s	IC 74LVX3L384QSCX
IC206	8-759-468-08	s	IC 74LVX3L384QSCX
IC207	8-759-468-08	s	IC 74LVX3L384QSCX
IC208	8-759-468-08	s	IC 74LVX3L384QSCX
IC209	8-759-468-08	s	IC 74LVX3L384QSCX
IC210	8-759-468-08	s	IC 74LVX3L384QSCX
IC211	8-759-468-08	s	IC 74LVX3L384QSCX
IC212	8-759-468-08	s	IC 74LVX3L384QSCX
IC213	8-759-468-08	s	IC 74LVX3L384QSCX
IC214	8-759-468-08	s	IC 74LVX3L384QSCX
IC215	8-759-468-08	s	IC 74LVX3L384QSCX
IC216	8-759-468-08	s	IC 74LVX3L384QSCX
IC217	8-759-468-08	s	IC 74LVX3L384QSCX
IC218	8-759-468-08	s	IC 74LVX3L384QSCX
IC219	8-759-468-08	s	IC 74LVX3L384QSCX
IC220	8-759-468-08	s	IC 74LVX3L384QSCX
IC221	8-759-468-08	s	IC 74LVX3L384QSCX
IC222	8-759-468-08	s	IC 74LVX3L384QSCX
IC223	8-759-468-08	s	IC 74LVX3L384QSCX
IC224	8-759-468-08	s	IC 74LVX3L384QSCX
IC225	8-759-468-08	s	IC 74LVX3L384QSCX
IC226	8-759-468-08	s	IC 74LVX3L384QSCX
IC227	8-759-468-08	s	IC 74LVX3L384QSCX

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC228	8-759-468-08	s	IC 74LVX3L384QSCX
IC229	8-759-468-08	s	IC 74LVX3L384QSCX
IC230	8-759-468-08	s	IC 74LVX3L384QSCX
IC231	8-759-468-08	s	IC 74LVX3L384QSCX
IC232	8-759-468-08	s	IC 74LVX3L384QSCX
IC233	8-759-468-08	s	IC 74LVX3L384QSCX
IC234	8-759-468-08	s	IC 74LVX3L384QSCX
IC235	8-759-468-08	s	IC 74LVX3L384QSCX
IC236	8-759-468-08	s	IC 74LVX3L384QSCX
IC237	8-759-468-08	s	IC 74LVX3L384QSCX
IC238	8-759-468-08	s	IC 74LVX3L384QSCX
IC239	8-759-468-08	s	IC 74LVX3L384QSCX
IC240	8-759-468-08	s	IC 74LVX3L384QSCX
IC241	8-759-468-08	s	IC 74LVX3L384QSCX
IC242	8-759-468-08	s	IC 74LVX3L384QSCX
IC243	8-759-468-08	s	IC 74LVX3L384QSCX
IC244	8-759-468-08	s	IC 74LVX3L384QSCX
IC245	8-759-468-08	s	IC 74LVX3L384QSCX
IC246	8-759-468-08	s	IC 74LVX3L384QSCX
IC247	8-759-468-08	s	IC 74LVX3L384QSCX
IC248	8-759-468-08	s	IC 74LVX3L384QSCX
IC249	8-759-468-08	s	IC 74LVX3L384QSCX
IC250	8-759-468-08	s	IC 74LVX3L384QSCX
IC251	8-759-468-08	s	IC 74LVX3L384QSCX
IC252	8-759-468-08	s	IC 74LVX3L384QSCX
IC253	8-759-468-08	s	IC 74LVX3L384QSCX
IC254	8-759-468-08	s	IC 74LVX3L384QSCX
IC255	8-759-468-08	s	IC 74LVX3L384QSCX
IC256	8-759-468-08	s	IC 74LVX3L384QSCX
IC257	8-759-468-08	s	IC 74LVX3L384QSCX
IC258	8-759-468-08	s	IC 74LVX3L384QSCX
IC259	8-759-468-08	s	IC 74LVX3L384QSCX
IC260	8-759-468-08	s	IC 74LVX3L384QSCX
IC261	8-759-468-08	s	IC 74LVX3L384QSCX
IC262	8-759-468-08	s	IC 74LVX3L384QSCX
IC263	8-759-468-08	s	IC 74LVX3L384QSCX
IC264	8-759-468-08	s	IC 74LVX3L384QSCX
IC265	8-759-468-08	s	IC 74LVX3L384QSCX
IC266	8-759-468-08	s	IC 74LVX3L384QSCX
IC267	8-759-468-08	s	IC 74LVX3L384QSCX
IC268	8-759-468-08	s	IC 74LVX3L384QSCX
IC269	8-759-468-08	s	IC 74LVX3L384QSCX
IC270	8-759-468-08	s	IC 74LVX3L384QSCX
IC271	8-759-468-08	s	IC 74LVX3L384QSCX
IC272	8-759-468-08	s	IC 74LVX3L384QSCX
IC273	8-759-523-36	s	IC TC74ACT04FT(EL)
IC274	8-759-523-36	s	IC TC74ACT04FT(EL)
IC275	8-759-523-36	s	IC TC74ACT04FT(EL)
IC276	8-759-523-36	s	IC TC74ACT04FT(EL)
IC277	8-759-468-08	s	IC 74LVX3L384QSCX
IC278	8-759-468-08	s	IC 74LVX3L384QSCX
IC279	8-759-468-08	s	IC 74LVX3L384QSCX
IC280	8-759-468-08	s	IC 74LVX3L384QSCX
IC281	8-759-468-08	s	IC 74LVX3L384QSCX
IC282	8-759-523-36	s	IC TC74ACT04FT(EL)
IC283	8-759-523-36	s	IC TC74ACT04FT(EL)
IC284	8-759-523-36	s	IC TC74ACT04FT(EL)
IC285	8-759-523-49	s	IC TC74ACT541FT(EL)
IC286	8-759-505-06	s	IC CXD8058Q

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC287	8-759-505-06	s	IC CXD8058Q
IC288	8-759-523-49	s	IC TC74ACT541FT(EL)
IC289	8-759-389-45	s	IC 74LCX16244MTDX
IC290	8-759-505-00	s	IC CXD8052Q
IC291	8-759-389-45	s	IC 74LCX16244MTDX
IC292	8-759-389-45	s	IC 74LCX16244MTDX
IC293	8-759-389-45	s	IC 74LCX16244MTDX
IC294	8-759-389-45	s	IC 74LCX16244MTDX
IC295	8-759-389-45	s	IC 74LCX16244MTDX
IC296	8-759-456-26	s	IC 74LCX541MTCX
IC297	8-759-523-49	s	IC TC74ACT541FT(EL)
IC298	8-759-456-26	s	IC 74LCX541MTCX
IC299	8-759-456-26	s	IC 74LCX541MTCX
IC300	8-759-456-26	s	IC 74LCX541MTCX
IC301	8-759-456-26	s	IC 74LCX541MTCX
IC302	8-759-456-26	s	IC 74LCX541MTCX
IC303	8-759-456-26	s	IC 74LCX541MTCX
IC304	8-759-456-26	s	IC 74LCX541MTCX
IC305	8-759-523-49	s	IC TC74ACT541FT(EL)
IC306	8-759-523-51	s	IC TC74ACT574FT(EL)
IC307	8-759-523-49	s	IC TC74ACT541FT(EL)
IC308	8-759-523-49	s	IC TC74ACT541FT(EL)
IC309	8-759-468-08	s	IC 74LVX3L384QSCX
IC310	8-759-466-59	s	IC CGS2535TVX
IC311	8-759-468-08	s	IC 74LVX3L384QSCX
IC312	8-759-466-59	s	IC CGS2535TVX
IC314	8-759-466-59	s	IC CGS2535TVX
IC315	8-759-466-59	s	IC CGS2535TVX
IC316	8-759-523-49	s	IC TC74ACT541FT(EL)
R1	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R2	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R3	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R4	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R5	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R6	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R7	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R9	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R10	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R11	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R12	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R13	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R15	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R16	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R17	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R18	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R33	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R35	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R36	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R37	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R38	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R39	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R40	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R41	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R42	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R43	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R44	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R45	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R46	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R47	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R48	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R49	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R50	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R51	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R52	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R53	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R62	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R63	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R64	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R65	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R66	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R67	1-216-675-11	s	METAL, CHIP 10k 0.5% 1/10W
R68	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R69	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R70	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R71	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R72	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R73	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R75	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R76	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R77	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R78	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R79	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R80	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R81	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R82	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R83	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R84	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R85	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R86	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R87	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R88	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R89	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R90	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R91	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R93	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R94	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R95	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R96	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R97	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R98	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R99	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R100	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R101	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R102	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R103	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R104	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R105	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R106	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R107	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R108	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R109	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R110	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R111	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R112	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R113	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R114	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R115	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R116	*c 1-216-655-91	s	METAL 1.5k 0.5% 1/10W

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R117	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R118	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R119	1-216-295-91	s	RES, CHIP 0
R120	1-216-295-91	s	RES, CHIP 0
R121	1-216-295-91	s	RES, CHIP 0
R122	1-216-295-91	s	RES, CHIP 0
R123	1-216-295-91	s	RES, CHIP 0
R124	1-216-295-91	s	RES, CHIP 0
R125	1-216-295-91	s	RES, CHIP 0
R126	1-216-295-91	s	RES, CHIP 0
R128	1-216-295-91	s	RES, CHIP 0
R129	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R130	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R131	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R133	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R135	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R137	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R139	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R141	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R143	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R145	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R146	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R149	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R150	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R153	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R154	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R156	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R159	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R160	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R163	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R164	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R167	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R168	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R171	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R172	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R176	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R177	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R179	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R180	1-216-295-91	s	RES, CHIP 0
R181	1-216-295-91	s	RES, CHIP 0
R182	1-216-295-91	s	RES, CHIP 0
R183	1-216-295-91	s	RES, CHIP 0
R184	1-216-295-91	s	RES, CHIP 0
R185	1-216-295-91	s	RES, CHIP 0
R187	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R188	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R189	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R190	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R191	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R192	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R194	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R195	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R196	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R197	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R198	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R199	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R200	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R201	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R202	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R203	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R205	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R207	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R216	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R217	1-216-620-11	s	METAL, CHIP 51 0.5% 1/10W
R218	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R219	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R220	1-216-699-11	s	METAL, CHIP 100k 0.5% 1/10W
R221	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R222	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R223	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R224	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R225	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R226	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R227	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R228	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R229	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R230	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R231	1-216-651-11	s	METAL, CHIP 1k 0.5% 1/10W
R234	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R239	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R240	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R241	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R242	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R245	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R246	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W
R252	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R253	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R255	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R256	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R257	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R258	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R259	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R260	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R262	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R264	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R265	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R266	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R267	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R268	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R269	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R270	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R271	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R272	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R273	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R274	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R275	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R280	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R285	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R286	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R289	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R290	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R291	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R292	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R293	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R294	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R295	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R296	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R297	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R298	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R299	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R300	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R301	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R302	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R303	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R304	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R305	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R306	1-216-659-11	s	METAL, CHIP 2.2k 0.5% 1/10W
R307	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R309	1-216-295-91	s	RES, CHIP 0
R310	1-216-295-91	s	RES, CHIP 0
R312	1-216-295-91	s	RES, CHIP 0
R314	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R315	1-216-295-91	s	RES, CHIP 0
R316	1-216-295-91	s	RES, CHIP 0
R318	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R319	1-216-295-91	s	RES, CHIP 0
R320	1-216-295-91	s	RES, CHIP 0
R323	1-216-295-91	s	RES, CHIP 0
R324	1-216-295-91	s	RES, CHIP 0
R325	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R326	1-216-295-91	s	RES, CHIP 0
R327	1-216-295-91	s	RES, CHIP 0
R330	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R331	1-216-295-91	s	RES, CHIP 0
R333	1-216-295-91	s	RES, CHIP 0
R334	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R335	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R345	1-216-623-11	s	METAL, CHIP 68 0.5% 1/10W
R346	1-216-623-11	s	METAL, CHIP 68 0.5% 1/10W
R347	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R348	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
R349	*a 1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W (Except for 24P system)
	1-216-295-91	s	RES, CHIP 0 (for 24P system)
R353	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W
R354	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W
RB1	1-234-078-11	s	RES, CHIP NETWORK 47
RB2	1-234-078-11	s	RES, CHIP NETWORK 47
RB3	1-234-078-11	s	RES, CHIP NETWORK 47
RB4	1-234-078-11	s	RES, CHIP NETWORK 47
RB5	1-234-078-11	s	RES, CHIP NETWORK 47
RB6	1-234-078-11	s	RES, CHIP NETWORK 47
RB7	1-234-078-11	s	RES, CHIP NETWORK 47
RB8	1-234-078-11	s	RES, CHIP NETWORK 47
RB9	1-234-078-11	s	RES, CHIP NETWORK 47
RB10	1-234-078-11	s	RES, CHIP NETWORK 47
RB11	1-234-078-11	s	RES, CHIP NETWORK 47
RB12	1-234-078-11	s	RES, CHIP NETWORK 47
RB13	1-234-078-11	s	RES, CHIP NETWORK 47
RB14	1-234-078-11	s	RES, CHIP NETWORK 47
RB15	1-234-078-11	s	RES, CHIP NETWORK 47
RB16	1-234-078-11	s	RES, CHIP NETWORK 47
RB17	1-234-078-11	s	RES, CHIP NETWORK 47
RB18	1-234-078-11	s	RES, CHIP NETWORK 47
RB19	1-234-078-11	s	RES, CHIP NETWORK 47

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB20	1-234-078-11	s	RES, CHIP NETWORK 47
RB21	1-234-078-11	s	RES, CHIP NETWORK 47
RB22	1-233-448-11	s	RES, CHIP NETWORK 22
RB23	1-233-448-11	s	RES, CHIP NETWORK 22
RB24	1-233-448-11	s	RES, CHIP NETWORK 22
RB25	1-233-448-11	s	RES, CHIP NETWORK 22
RB26	1-233-448-11	s	RES, CHIP NETWORK 22
RB27	1-233-448-11	s	RES, CHIP NETWORK 22
RB28	1-233-448-11	s	RES, CHIP NETWORK 22
RB29	1-233-448-11	s	RES, CHIP NETWORK 22
RB30	1-233-448-11	s	RES, CHIP NETWORK 22
RB31	1-233-448-11	s	RES, CHIP NETWORK 22
RB32	1-233-448-11	s	RES, CHIP NETWORK 22
RB33	1-233-448-11	s	RES, CHIP NETWORK 22
RB34	1-233-448-11	s	RES, CHIP NETWORK 22
RB35	1-233-448-11	s	RES, CHIP NETWORK 22
RB36	1-233-448-11	s	RES, CHIP NETWORK 22
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB39	1-233-448-11	s	RES, CHIP NETWORK 22
RB40	1-233-448-11	s	RES, CHIP NETWORK 22
RB41	1-233-448-11	s	RES, CHIP NETWORK 22
RB42	1-233-448-11	s	RES, CHIP NETWORK 22
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22
RB45	1-233-448-11	s	RES, CHIP NETWORK 22
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB47	1-233-448-11	s	RES, CHIP NETWORK 22
RB48	1-233-448-11	s	RES, CHIP NETWORK 22
RB49	1-233-448-11	s	RES, CHIP NETWORK 22
RB50	1-233-448-11	s	RES, CHIP NETWORK 22
RB51	1-233-448-11	s	RES, CHIP NETWORK 22
RB52	1-234-078-11	s	RES, CHIP NETWORK 47
RB53	1-234-078-11	s	RES, CHIP NETWORK 47
RB54	1-234-078-11	s	RES, CHIP NETWORK 47
RB55	1-234-078-11	s	RES, CHIP NETWORK 47
RB56	1-234-078-11	s	RES, CHIP NETWORK 47
RB57	1-234-078-11	s	RES, CHIP NETWORK 47
RB58	1-234-078-11	s	RES, CHIP NETWORK 47
RB59	1-234-078-11	s	RES, CHIP NETWORK 47
RB60	1-234-078-11	s	RES, CHIP NETWORK 47
RB61	1-234-078-11	s	RES, CHIP NETWORK 47
RB62	1-234-078-11	s	RES, CHIP NETWORK 47
RB63	1-234-078-11	s	RES, CHIP NETWORK 47
RB64	1-234-078-11	s	RES, CHIP NETWORK 47
RB65	1-234-078-11	s	RES, CHIP NETWORK 47
RB66	1-234-078-11	s	RES, CHIP NETWORK 47
RB67	1-234-078-11	s	RES, CHIP NETWORK 47
RB68	1-234-078-11	s	RES, CHIP NETWORK 47
RB69	1-234-078-11	s	RES, CHIP NETWORK 47
RB70	1-234-078-11	s	RES, CHIP NETWORK 47
RB71	1-234-078-11	s	RES, CHIP NETWORK 47
RB72	1-234-078-11	s	RES, CHIP NETWORK 47
RB73	1-234-078-11	s	RES, CHIP NETWORK 47
RB74	1-234-078-11	s	RES, CHIP NETWORK 47
RB75	1-234-078-11	s	RES, CHIP NETWORK 47
RB76	1-233-448-11	s	RES, CHIP NETWORK 22
RB77	1-233-448-11	s	RES, CHIP NETWORK 22
RB78	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB79	1-233-448-11	s	RES, CHIP NETWORK 22
RB80	1-233-448-11	s	RES, CHIP NETWORK 22
RB81	1-233-448-11	s	RES, CHIP NETWORK 22
RB82	1-233-448-11	s	RES, CHIP NETWORK 22
RB83	1-233-448-11	s	RES, CHIP NETWORK 22
RB84	1-233-448-11	s	RES, CHIP NETWORK 22
RB85	1-233-448-11	s	RES, CHIP NETWORK 22
RB86	1-233-448-11	s	RES, CHIP NETWORK 22
RB87	1-233-448-11	s	RES, CHIP NETWORK 22
RB88	1-233-448-11	s	RES, CHIP NETWORK 22
RB89	1-233-448-11	s	RES, CHIP NETWORK 22
RB90	1-233-448-11	s	RES, CHIP NETWORK 22
RB91	1-233-448-11	s	RES, CHIP NETWORK 22
RB92	1-233-448-11	s	RES, CHIP NETWORK 22
RB93	1-233-448-11	s	RES, CHIP NETWORK 22
RB94	1-233-448-11	s	RES, CHIP NETWORK 22
RB95	1-233-448-11	s	RES, CHIP NETWORK 22
RB96	1-233-448-11	s	RES, CHIP NETWORK 22
RB97	1-233-448-11	s	RES, CHIP NETWORK 22
RB98	1-233-448-11	s	RES, CHIP NETWORK 22
RB99	1-233-448-11	s	RES, CHIP NETWORK 22
RB100	1-233-448-11	s	RES, CHIP NETWORK 22
RB101	1-233-448-11	s	RES, CHIP NETWORK 22
RB102	1-233-448-11	s	RES, CHIP NETWORK 22
RB103	1-234-078-11	s	RES, CHIP NETWORK 47
RB104	1-234-078-11	s	RES, CHIP NETWORK 47
RB105	1-234-078-11	s	RES, CHIP NETWORK 47
RB106	1-234-078-11	s	RES, CHIP NETWORK 47
RB107	1-234-078-11	s	RES, CHIP NETWORK 47
RB108	1-234-078-11	s	RES, CHIP NETWORK 47
RB109	1-234-078-11	s	RES, CHIP NETWORK 47
RB110	1-234-078-11	s	RES, CHIP NETWORK 47
RB111	1-234-078-11	s	RES, CHIP NETWORK 47
RB112	1-234-078-11	s	RES, CHIP NETWORK 47
RB113	1-234-078-11	s	RES, CHIP NETWORK 47
RB114	1-234-078-11	s	RES, CHIP NETWORK 47
RB115	1-233-448-11	s	RES, CHIP NETWORK 22
RB116	1-233-448-11	s	RES, CHIP NETWORK 22
RB117	1-233-448-11	s	RES, CHIP NETWORK 22
RB118	1-233-448-11	s	RES, CHIP NETWORK 22
RB119	1-233-448-11	s	RES, CHIP NETWORK 22
RB120	1-233-448-11	s	RES, CHIP NETWORK 22
RB121	1-233-448-11	s	RES, CHIP NETWORK 22
RB122	1-233-448-11	s	RES, CHIP NETWORK 22
RB123	1-233-448-11	s	RES, CHIP NETWORK 22
RB124	1-233-448-11	s	RES, CHIP NETWORK 22
RB125	1-233-448-11	s	RES, CHIP NETWORK 22
RB126	1-233-448-11	s	RES, CHIP NETWORK 22
RB127	1-233-448-11	s	RES, CHIP NETWORK 22
RB128	1-233-448-11	s	RES, CHIP NETWORK 22
RB129	1-233-448-11	s	RES, CHIP NETWORK 22
RB130	1-233-448-11	s	RES, CHIP NETWORK 22
RB131	1-233-448-11	s	RES, CHIP NETWORK 22
RB132	1-233-448-11	s	RES, CHIP NETWORK 22
RB133	1-233-448-11	s	RES, CHIP NETWORK 22
RB134	1-233-448-11	s	RES, CHIP NETWORK 22
RB135	1-233-448-11	s	RES, CHIP NETWORK 22
RB136	1-233-448-11	s	RES, CHIP NETWORK 22
RB137	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB138	1-233-448-11	s	RES, CHIP NETWORK 22
RB139	1-233-448-11	s	RES, CHIP NETWORK 22
RB140	1-233-448-11	s	RES, CHIP NETWORK 22
RB141	1-233-448-11	s	RES, CHIP NETWORK 22
RB142	1-233-448-11	s	RES, CHIP NETWORK 22
RB143	1-233-448-11	s	RES, CHIP NETWORK 22
RB144	1-233-448-11	s	RES, CHIP NETWORK 22
RB145	1-233-448-11	s	RES, CHIP NETWORK 22
RB146	1-233-448-11	s	RES, CHIP NETWORK 22
RB147	1-233-448-11	s	RES, CHIP NETWORK 22
RB148	1-233-448-11	s	RES, CHIP NETWORK 22
RB149	1-233-448-11	s	RES, CHIP NETWORK 22
RB150	1-233-448-11	s	RES, CHIP NETWORK 22
RB151	1-233-448-11	s	RES, CHIP NETWORK 22
RB152	1-233-448-11	s	RES, CHIP NETWORK 22
RB153	1-233-448-11	s	RES, CHIP NETWORK 22
RB154	1-233-448-11	s	RES, CHIP NETWORK 22
RB155	1-233-448-11	s	RES, CHIP NETWORK 22
RB156	1-233-448-11	s	RES, CHIP NETWORK 22
RB157	1-234-077-11	s	RES, CHIP NETWORK 68
RB158	1-233-448-11	s	RES, CHIP NETWORK 22
RB159	1-233-448-11	s	RES, CHIP NETWORK 22
RB160	1-233-448-11	s	RES, CHIP NETWORK 22
RB161	1-233-448-11	s	RES, CHIP NETWORK 22
RB162	1-233-448-11	s	RES, CHIP NETWORK 22
RB163	1-233-448-11	s	RES, CHIP NETWORK 22
RB164	1-233-448-11	s	RES, CHIP NETWORK 22
RB165	1-233-448-11	s	RES, CHIP NETWORK 22
RB166	1-233-448-11	s	RES, CHIP NETWORK 22
RB167	1-234-077-11	s	RES, CHIP NETWORK 68
RB168	1-233-448-11	s	RES, CHIP NETWORK 22
RB169	1-233-448-11	s	RES, CHIP NETWORK 22
RB170	1-233-448-11	s	RES, CHIP NETWORK 22
RB171	1-233-448-11	s	RES, CHIP NETWORK 22
RB172	1-233-448-11	s	RES, CHIP NETWORK 22
RB173	1-233-448-11	s	RES, CHIP NETWORK 22
RB174	1-233-448-11	s	RES, CHIP NETWORK 22
RB175	1-233-448-11	s	RES, CHIP NETWORK 22
RB176	1-233-448-11	s	RES, CHIP NETWORK 22
RB177	1-233-448-11	s	RES, CHIP NETWORK 22
RB178	1-233-448-11	s	RES, CHIP NETWORK 22
RB179	1-233-448-11	s	RES, CHIP NETWORK 22
RB180	1-233-448-11	s	RES, CHIP NETWORK 22
RB181	1-233-448-11	s	RES, CHIP NETWORK 22
RB182	1-233-448-11	s	RES, CHIP NETWORK 22
RB183	1-233-448-11	s	RES, CHIP NETWORK 22
RB184	1-233-448-11	s	RES, CHIP NETWORK 22
RB185	1-233-448-11	s	RES, CHIP NETWORK 22
RB186	1-233-448-11	s	RES, CHIP NETWORK 22
RB187	1-234-077-11	s	RES, CHIP NETWORK 68
RB188	1-233-448-11	s	RES, CHIP NETWORK 22
RB189	1-234-077-11	s	RES, CHIP NETWORK 68
RB190	1-233-448-11	s	RES, CHIP NETWORK 22
RB191	1-233-448-11	s	RES, CHIP NETWORK 22
RB192	1-233-448-11	s	RES, CHIP NETWORK 22
RB193	1-233-448-11	s	RES, CHIP NETWORK 22
RB194	1-233-448-11	s	RES, CHIP NETWORK 22
RB195	1-233-448-11	s	RES, CHIP NETWORK 22
RB196	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB197	1-233-448-11	s	RES, CHIP NETWORK 22
RB198	1-233-448-11	s	RES, CHIP NETWORK 22
RB199	1-233-448-11	s	RES, CHIP NETWORK 22
RB200	1-233-448-11	s	RES, CHIP NETWORK 22
RB201	1-233-448-11	s	RES, CHIP NETWORK 22
RB202	1-233-448-11	s	RES, CHIP NETWORK 22
RB203	1-233-448-11	s	RES, CHIP NETWORK 22
RB204	1-233-448-11	s	RES, CHIP NETWORK 22
RB205	1-233-448-11	s	RES, CHIP NETWORK 22
RB206	1-233-448-11	s	RES, CHIP NETWORK 22
RB207	1-233-448-11	s	RES, CHIP NETWORK 22
RB208	1-233-448-11	s	RES, CHIP NETWORK 22
RB209	1-233-448-11	s	RES, CHIP NETWORK 22
RB210	1-233-448-11	s	RES, CHIP NETWORK 22
RB211	1-233-448-11	s	RES, CHIP NETWORK 22
RB212	1-233-448-11	s	RES, CHIP NETWORK 22
RB213	1-233-448-11	s	RES, CHIP NETWORK 22
RB214	1-233-448-11	s	RES, CHIP NETWORK 22
RB215	1-233-448-11	s	RES, CHIP NETWORK 22
RB216	1-233-448-11	s	RES, CHIP NETWORK 22
RB217	1-233-448-11	s	RES, CHIP NETWORK 22
RB218	1-233-448-11	s	RES, CHIP NETWORK 22
RB219	1-233-448-11	s	RES, CHIP NETWORK 22
RB220	1-233-448-11	s	RES, CHIP NETWORK 22
RB221	1-233-448-11	s	RES, CHIP NETWORK 22
RB222	1-233-448-11	s	RES, CHIP NETWORK 22
RB223	1-233-448-11	s	RES, CHIP NETWORK 22
RB224	1-233-448-11	s	RES, CHIP NETWORK 22
RB225	1-233-448-11	s	RES, CHIP NETWORK 22
RB226	1-233-448-11	s	RES, CHIP NETWORK 22
RB227	1-233-448-11	s	RES, CHIP NETWORK 22
RB228	1-233-448-11	s	RES, CHIP NETWORK 22
RB229	1-233-448-11	s	RES, CHIP NETWORK 22
RB230	1-233-448-11	s	RES, CHIP NETWORK 22
RB231	1-233-448-11	s	RES, CHIP NETWORK 22
RB232	1-233-448-11	s	RES, CHIP NETWORK 22
RB233	1-233-448-11	s	RES, CHIP NETWORK 22
RB234	1-233-448-11	s	RES, CHIP NETWORK 22
RB235	1-233-448-11	s	RES, CHIP NETWORK 22
RB236	1-233-448-11	s	RES, CHIP NETWORK 22
RB237	1-233-448-11	s	RES, CHIP NETWORK 22
RB238	1-233-448-11	s	RES, CHIP NETWORK 22
RB239	1-233-448-11	s	RES, CHIP NETWORK 22
RB240	1-233-448-11	s	RES, CHIP NETWORK 22
RB241	1-233-448-11	s	RES, CHIP NETWORK 22
RB242	1-233-448-11	s	RES, CHIP NETWORK 22
RB243	1-233-448-11	s	RES, CHIP NETWORK 22
RB244	1-233-448-11	s	RES, CHIP NETWORK 22
RB245	1-233-448-11	s	RES, CHIP NETWORK 22
RB246	1-233-448-11	s	RES, CHIP NETWORK 22
RB247	1-233-448-11	s	RES, CHIP NETWORK 22
RB248	1-233-448-11	s	RES, CHIP NETWORK 22
RB249	1-233-448-11	s	RES, CHIP NETWORK 22
RB250	1-233-448-11	s	RES, CHIP NETWORK 22
RB251	1-233-448-11	s	RES, CHIP NETWORK 22
RB252	1-233-448-11	s	RES, CHIP NETWORK 22
RB253	1-233-448-11	s	RES, CHIP NETWORK 22
RB254	1-233-448-11	s	RES, CHIP NETWORK 22
RB255	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB256	1-233-448-11	s	RES, CHIP NETWORK 22
RB257	1-233-448-11	s	RES, CHIP NETWORK 22
RB258	1-233-448-11	s	RES, CHIP NETWORK 22
RB259	1-233-448-11	s	RES, CHIP NETWORK 22
RB260	1-233-448-11	s	RES, CHIP NETWORK 22
RB261	1-233-448-11	s	RES, CHIP NETWORK 22
RB262	1-233-448-11	s	RES, CHIP NETWORK 22
RB263	1-233-448-11	s	RES, CHIP NETWORK 22
RB264	1-233-448-11	s	RES, CHIP NETWORK 22
RB265	1-233-448-11	s	RES, CHIP NETWORK 22
RB266	1-233-448-11	s	RES, CHIP NETWORK 22
RB267	1-233-448-11	s	RES, CHIP NETWORK 22
RB268	1-233-448-11	s	RES, CHIP NETWORK 22
RB269	1-233-448-11	s	RES, CHIP NETWORK 22
RB270	1-233-448-11	s	RES, CHIP NETWORK 22
RB271	1-233-448-11	s	RES, CHIP NETWORK 22
RB272	1-233-448-11	s	RES, CHIP NETWORK 22
RB273	1-233-448-11	s	RES, CHIP NETWORK 22
RB274	1-233-448-11	s	RES, CHIP NETWORK 22
RB275	1-234-078-11	s	RES, CHIP NETWORK 47
RB276	1-234-078-11	s	RES, CHIP NETWORK 47
RB277	1-234-078-11	s	RES, CHIP NETWORK 47
RB278	1-234-078-11	s	RES, CHIP NETWORK 47
RB279	1-234-078-11	s	RES, CHIP NETWORK 47
RB280	1-234-078-11	s	RES, CHIP NETWORK 47
RB281	1-234-078-11	s	RES, CHIP NETWORK 47
RB282	1-234-078-11	s	RES, CHIP NETWORK 47
RB283	1-234-078-11	s	RES, CHIP NETWORK 47
RB284	1-234-078-11	s	RES, CHIP NETWORK 47
RB285	1-234-078-11	s	RES, CHIP NETWORK 47
RB286	1-234-078-11	s	RES, CHIP NETWORK 47
RB287	1-234-078-11	s	RES, CHIP NETWORK 47
RB288	1-234-078-11	s	RES, CHIP NETWORK 47
RB289	1-234-078-11	s	RES, CHIP NETWORK 47
RB290	1-234-078-11	s	RES, CHIP NETWORK 47
RB291	1-234-078-11	s	RES, CHIP NETWORK 47
RB292	1-234-078-11	s	RES, CHIP NETWORK 47
RB293	1-234-078-11	s	RES, CHIP NETWORK 47
RB294	1-234-078-11	s	RES, CHIP NETWORK 47
RB295	1-234-078-11	s	RES, CHIP NETWORK 47
RB296	1-234-078-11	s	RES, CHIP NETWORK 47
RB297	1-234-078-11	s	RES, CHIP NETWORK 47
RB298	1-234-078-11	s	RES, CHIP NETWORK 47
RB299	1-233-448-11	s	RES, CHIP NETWORK 22
RB300	1-233-448-11	s	RES, CHIP NETWORK 22
RB301	1-233-448-11	s	RES, CHIP NETWORK 22
RB302	1-233-448-11	s	RES, CHIP NETWORK 22
RB303	1-233-448-11	s	RES, CHIP NETWORK 22
RB304	1-233-448-11	s	RES, CHIP NETWORK 22
RB305	1-233-448-11	s	RES, CHIP NETWORK 22
RB306	1-233-448-11	s	RES, CHIP NETWORK 22
RB307	1-233-448-11	s	RES, CHIP NETWORK 22
RB308	1-233-448-11	s	RES, CHIP NETWORK 22
RB309	1-233-448-11	s	RES, CHIP NETWORK 22
RB310	1-233-448-11	s	RES, CHIP NETWORK 22
RB311	1-233-448-11	s	RES, CHIP NETWORK 22
RB312	1-233-448-11	s	RES, CHIP NETWORK 22
RB313	1-233-448-11	s	RES, CHIP NETWORK 22
RB314	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB315	1-233-448-11	s	RES, CHIP NETWORK 22
RB316	1-233-448-11	s	RES, CHIP NETWORK 22
RB317	1-233-448-11	s	RES, CHIP NETWORK 22
RB318	1-233-448-11	s	RES, CHIP NETWORK 22
RB319	1-233-448-11	s	RES, CHIP NETWORK 22
RB320	1-233-448-11	s	RES, CHIP NETWORK 22
RB321	1-233-448-11	s	RES, CHIP NETWORK 22
RB322	1-233-448-11	s	RES, CHIP NETWORK 22
RB323	1-233-448-11	s	RES, CHIP NETWORK 22
RB324	1-233-448-11	s	RES, CHIP NETWORK 22
RB325	1-233-448-11	s	RES, CHIP NETWORK 22
RB326	1-234-078-11	s	RES, CHIP NETWORK 47
RB327	1-234-078-11	s	RES, CHIP NETWORK 47
RB328	1-234-078-11	s	RES, CHIP NETWORK 47
RB329	1-234-078-11	s	RES, CHIP NETWORK 47
RB330	1-234-078-11	s	RES, CHIP NETWORK 47
RB331	1-234-078-11	s	RES, CHIP NETWORK 47
RB332	1-234-078-11	s	RES, CHIP NETWORK 47
RB333	1-234-078-11	s	RES, CHIP NETWORK 47
RB334	1-234-078-11	s	RES, CHIP NETWORK 47
RB335	1-234-078-11	s	RES, CHIP NETWORK 47
RB336	1-234-078-11	s	RES, CHIP NETWORK 47
RB337	1-234-078-11	s	RES, CHIP NETWORK 47
RB338	1-234-078-11	s	RES, CHIP NETWORK 47
RB339	1-234-078-11	s	RES, CHIP NETWORK 47
RB340	1-234-078-11	s	RES, CHIP NETWORK 47
RB341	1-234-078-11	s	RES, CHIP NETWORK 47
RB342	1-234-078-11	s	RES, CHIP NETWORK 47
RB343	1-234-078-11	s	RES, CHIP NETWORK 47
RB344	1-234-078-11	s	RES, CHIP NETWORK 47
RB345	1-234-078-11	s	RES, CHIP NETWORK 47
RB346	1-234-078-11	s	RES, CHIP NETWORK 47
RB347	1-234-078-11	s	RES, CHIP NETWORK 47
RB348	1-234-078-11	s	RES, CHIP NETWORK 47
RB349	1-234-078-11	s	RES, CHIP NETWORK 47
RB350	1-233-448-11	s	RES, CHIP NETWORK 22
RB351	1-233-448-11	s	RES, CHIP NETWORK 22
RB352	1-233-448-11	s	RES, CHIP NETWORK 22
RB353	1-233-448-11	s	RES, CHIP NETWORK 22
RB354	1-233-448-11	s	RES, CHIP NETWORK 22
RB355	1-233-448-11	s	RES, CHIP NETWORK 22
RB356	1-233-448-11	s	RES, CHIP NETWORK 22
RB357	1-233-448-11	s	RES, CHIP NETWORK 22
RB358	1-233-448-11	s	RES, CHIP NETWORK 22
RB359	1-233-448-11	s	RES, CHIP NETWORK 22
RB360	1-233-448-11	s	RES, CHIP NETWORK 22
RB361	1-233-448-11	s	RES, CHIP NETWORK 22
RB362	1-233-448-11	s	RES, CHIP NETWORK 22
RB363	1-233-448-11	s	RES, CHIP NETWORK 22
RB364	1-233-448-11	s	RES, CHIP NETWORK 22
RB365	1-233-448-11	s	RES, CHIP NETWORK 22
RB366	1-233-448-11	s	RES, CHIP NETWORK 22
RB367	1-233-448-11	s	RES, CHIP NETWORK 22
RB368	1-233-448-11	s	RES, CHIP NETWORK 22
RB369	1-233-448-11	s	RES, CHIP NETWORK 22
RB370	1-233-448-11	s	RES, CHIP NETWORK 22
RB371	1-233-448-11	s	RES, CHIP NETWORK 22
RB372	1-233-448-11	s	RES, CHIP NETWORK 22
RB373	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB374	1-233-448-11	s	RES, CHIP NETWORK 22
RB375	1-233-448-11	s	RES, CHIP NETWORK 22
RB376	1-233-448-11	s	RES, CHIP NETWORK 22
RB377	1-234-078-11	s	RES, CHIP NETWORK 47
RB378	1-234-078-11	s	RES, CHIP NETWORK 47
RB379	1-234-078-11	s	RES, CHIP NETWORK 47
RB380	1-234-078-11	s	RES, CHIP NETWORK 47
RB381	1-234-078-11	s	RES, CHIP NETWORK 47
RB382	1-234-078-11	s	RES, CHIP NETWORK 47
RB383	1-234-078-11	s	RES, CHIP NETWORK 47
RB384	1-234-078-11	s	RES, CHIP NETWORK 47
RB385	1-234-078-11	s	RES, CHIP NETWORK 47
RB386	1-233-448-11	s	RES, CHIP NETWORK 22
RB387	1-233-448-11	s	RES, CHIP NETWORK 22
RB388	1-233-448-11	s	RES, CHIP NETWORK 22
RB389	1-233-448-11	s	RES, CHIP NETWORK 22
RB390	1-233-448-11	s	RES, CHIP NETWORK 22
RB391	1-233-448-11	s	RES, CHIP NETWORK 22
RB392	1-233-448-11	s	RES, CHIP NETWORK 22
RB393	1-233-448-11	s	RES, CHIP NETWORK 22
RB394	1-233-448-11	s	RES, CHIP NETWORK 22
RB395	1-233-448-11	s	RES, CHIP NETWORK 22
RB396	1-233-448-11	s	RES, CHIP NETWORK 22
RB397	1-233-448-11	s	RES, CHIP NETWORK 22
RB398	1-233-448-11	s	RES, CHIP NETWORK 22
RB399	1-233-448-11	s	RES, CHIP NETWORK 22
RB400	1-233-448-11	s	RES, CHIP NETWORK 22
RB401	1-233-448-11	s	RES, CHIP NETWORK 22
RB402	1-233-448-11	s	RES, CHIP NETWORK 22
RB403	1-233-448-11	s	RES, CHIP NETWORK 22
RB404	1-233-448-11	s	RES, CHIP NETWORK 22
RB405	1-233-448-11	s	RES, CHIP NETWORK 22
RB406	1-233-448-11	s	RES, CHIP NETWORK 22
RB407	1-233-448-11	s	RES, CHIP NETWORK 22
RB408	1-233-448-11	s	RES, CHIP NETWORK 22
RB409	1-233-448-11	s	RES, CHIP NETWORK 22
RB410	1-233-448-11	s	RES, CHIP NETWORK 22
RB411	1-233-448-11	s	RES, CHIP NETWORK 22
RB412	1-233-448-11	s	RES, CHIP NETWORK 22
RB413	1-233-448-11	s	RES, CHIP NETWORK 22
RB414	1-233-448-11	s	RES, CHIP NETWORK 22
RB415	1-233-448-11	s	RES, CHIP NETWORK 22
RB416	1-233-448-11	s	RES, CHIP NETWORK 22
RB417	1-233-448-11	s	RES, CHIP NETWORK 22
RB418	1-233-448-11	s	RES, CHIP NETWORK 22
RB419	1-233-448-11	s	RES, CHIP NETWORK 22
RB420	1-233-448-11	s	RES, CHIP NETWORK 22
RB421	1-233-448-11	s	RES, CHIP NETWORK 22
RB422	1-233-448-11	s	RES, CHIP NETWORK 22
RB423	1-233-448-11	s	RES, CHIP NETWORK 22
RB424	1-233-448-11	s	RES, CHIP NETWORK 22
RB425	1-233-448-11	s	RES, CHIP NETWORK 22
RB426	1-233-448-11	s	RES, CHIP NETWORK 22
RB427	1-233-448-11	s	RES, CHIP NETWORK 22
RB428	1-233-448-11	s	RES, CHIP NETWORK 22
RB429	1-233-448-11	s	RES, CHIP NETWORK 22
RB430	1-233-448-11	s	RES, CHIP NETWORK 22
RB431	1-233-448-11	s	RES, CHIP NETWORK 22
RB432	1-233-448-11	s	RES, CHIP NETWORK 22

(VSW-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB433	1-233-448-11	s	RES, CHIP NETWORK 22
RB434	1-233-448-11	s	RES, CHIP NETWORK 22
RB435	1-233-448-11	s	RES, CHIP NETWORK 22
RB436	1-233-448-11	s	RES, CHIP NETWORK 22
RB437	1-233-448-11	s	RES, CHIP NETWORK 22
RB438	1-233-448-11	s	RES, CHIP NETWORK 22
RB439	1-233-448-11	s	RES, CHIP NETWORK 22
RB440	1-233-448-11	s	RES, CHIP NETWORK 22
RB441	1-233-448-11	s	RES, CHIP NETWORK 22
RB442	1-233-448-11	s	RES, CHIP NETWORK 22
RB443	1-233-448-11	s	RES, CHIP NETWORK 22
RB444	1-233-448-11	s	RES, CHIP NETWORK 22
RB445	1-233-448-11	s	RES, CHIP NETWORK 22
RB446	1-233-448-11	s	RES, CHIP NETWORK 22
RB447	1-233-448-11	s	RES, CHIP NETWORK 22
RB448	1-233-448-11	s	RES, CHIP NETWORK 22
RB449	1-233-448-11	s	RES, CHIP NETWORK 22
RB450	1-233-448-11	s	RES, CHIP NETWORK 22
RB451	1-233-448-11	s	RES, CHIP NETWORK 22
RB452	1-233-448-11	s	RES, CHIP NETWORK 22
RB453	1-233-448-11	s	RES, CHIP NETWORK 22
RB454	1-233-448-11	s	RES, CHIP NETWORK 22
RB455	1-233-448-11	s	RES, CHIP NETWORK 22
RB456	1-233-448-11	s	RES, CHIP NETWORK 22
RB457	1-233-448-11	s	RES, CHIP NETWORK 22
RB458	1-233-448-11	s	RES, CHIP NETWORK 22
RB459	1-233-448-11	s	RES, CHIP NETWORK 22
RB460	1-233-448-11	s	RES, CHIP NETWORK 22
RB461	1-233-448-11	s	RES, CHIP NETWORK 22
RB462	1-233-448-11	s	RES, CHIP NETWORK 22
RB463	1-233-448-11	s	RES, CHIP NETWORK 22
RB464	1-233-448-11	s	RES, CHIP NETWORK 22
RB465	1-233-448-11	s	RES, CHIP NETWORK 22
RB466	1-233-448-11	s	RES, CHIP NETWORK 22
RB467	1-233-448-11	s	RES, CHIP NETWORK 22
RB468	1-233-448-11	s	RES, CHIP NETWORK 22
RB469	1-233-448-11	s	RES, CHIP NETWORK 22
RB470	1-233-448-11	s	RES, CHIP NETWORK 22
RB471	1-233-448-11	s	RES, CHIP NETWORK 22
RB472	1-233-448-11	s	RES, CHIP NETWORK 22
RB473	1-233-448-11	s	RES, CHIP NETWORK 22
RB474	1-233-448-11	s	RES, CHIP NETWORK 22
RB475	1-233-448-11	s	RES, CHIP NETWORK 22
RB476	1-233-448-11	s	RES, CHIP NETWORK 22
RB477	1-233-448-11	s	RES, CHIP NETWORK 22
RB478	1-233-448-11	s	RES, CHIP NETWORK 22
RB479	1-233-448-11	s	RES, CHIP NETWORK 22

WKG-25 BOARD
---

*a:[Lot No. 710 - 801]
*b:[Lot No. 802 -]
*c:[Lot No. 710 - 805]
*d:[Lot No. 806 - 807]
*e:[Lot No. 808 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8318-830-A	o	MOUNTED CIRCUIT BOARD, WKG-25
2pcs	3-194-878-01	s	LEVER, PC BOARD
2pcs	7-626-320-11	s	PIN, SPRING 3x8
4pcs	4-886-821-11	s	SCREW, S TIGHT, +PTTWH 3x6
6pcs *b	7-685-104-21	s	SCREW +P 2x6 TYPE2 SLIT
*a	7-621-772-48	s	SCREW +B 2x8
6pcs *a	7-622-205-05	s	NUT, M2 TYPE2
C1	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C2	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C3	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C6	1-163-038-00	s	CERAMIC 0.1uF 25V
C7	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C8	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C9	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C10	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C13	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-038-00	s	CERAMIC 0.1uF 25V
C23	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C24	1-163-038-00	s	CERAMIC 0.1uF 25V
C25	1-163-038-00	s	CERAMIC 0.1uF 25V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-163-038-00	s	CERAMIC 0.1uF 25V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C43	1-163-038-00	s	CERAMIC 0.1uF 25V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-163-038-00	s	CERAMIC 0.1uF 25V
C48	1-163-038-00	s	CERAMIC 0.1uF 25V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V
C52	1-163-038-00	s	CERAMIC 0.1uF 25V
C53	1-163-038-00	s	CERAMIC 0.1uF 25V
C54	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-038-00	s	CERAMIC 0.1uF 25V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-038-00	s	CERAMIC 0.1uF 25V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
C72	1-163-038-00	s	CERAMIC 0.1uF 25V
C73	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C74	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C75	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C76	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C77	1-163-038-00	s	CERAMIC 0.1uF 25V
C78	1-163-038-00	s	CERAMIC 0.1uF 25V
C79	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C80	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C81	1-163-038-00	s	CERAMIC 0.1uF 25V
C82	1-163-038-00	s	CERAMIC 0.1uF 25V
C83	1-163-038-00	s	CERAMIC 0.1uF 25V
C84	1-163-038-00	s	CERAMIC 0.1uF 25V
C85	1-163-038-00	s	CERAMIC 0.1uF 25V
C86	1-163-038-00	s	CERAMIC 0.1uF 25V
C87	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C88	1-163-038-00	s	CERAMIC 0.1uF 25V
C89	1-163-038-00	s	CERAMIC 0.1uF 25V
C90	1-163-038-00	s	CERAMIC 0.1uF 25V
C91	1-163-038-00	s	CERAMIC 0.1uF 25V
C92	1-163-038-00	s	CERAMIC 0.1uF 25V
C93	1-163-038-00	s	CERAMIC 0.1uF 25V
C94	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C95	1-163-038-00	s	CERAMIC 0.1uF 25V
C96	1-163-038-00	s	CERAMIC 0.1uF 25V
C97	1-163-038-00	s	CERAMIC 0.1uF 25V
C98	1-163-038-00	s	CERAMIC 0.1uF 25V
C99	1-163-038-00	s	CERAMIC 0.1uF 25V
C100	1-163-038-00	s	CERAMIC 0.1uF 25V
C101	1-163-038-00	s	CERAMIC 0.1uF 25V
C102	1-163-038-00	s	CERAMIC 0.1uF 25V
C103	1-163-038-00	s	CERAMIC 0.1uF 25V
C104	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C105	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C106	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C107	1-163-038-00	s	CERAMIC 0.1uF 25V
C108	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C109	1-163-038-00	s	CERAMIC 0.1uF 25V
C110	1-163-038-00	s	CERAMIC 0.1uF 25V
C111	1-163-038-00	s	CERAMIC 0.1uF 25V
C112	1-163-038-00	s	CERAMIC 0.1uF 25V
C113	1-163-038-00	s	CERAMIC 0.1uF 25V
C114	1-163-038-00	s	CERAMIC 0.1uF 25V
C115	1-163-038-00	s	CERAMIC 0.1uF 25V
C116	1-163-038-00	s	CERAMIC 0.1uF 25V
C117	1-163-038-00	s	CERAMIC 0.1uF 25V
C118	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C119	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C120	1-163-038-00	s	CERAMIC 0.1uF 25V
C121	1-163-038-00	s	CERAMIC 0.1uF 25V
C122	1-163-038-00	s	CERAMIC 0.1uF 25V
C123	1-163-038-00	s	CERAMIC 0.1uF 25V
C124	1-163-038-00	s	CERAMIC 0.1uF 25V
C125	1-163-038-00	s	CERAMIC 0.1uF 25V
C126	1-163-038-00	s	CERAMIC 0.1uF 25V
C127	1-163-038-00	s	CERAMIC 0.1uF 25V
C128	1-163-038-00	s	CERAMIC 0.1uF 25V
C129	1-163-038-00	s	CERAMIC 0.1uF 25V
C130	1-163-038-00	s	CERAMIC 0.1uF 25V
C131	1-163-038-00	s	CERAMIC 0.1uF 25V
C132	1-163-038-00	s	CERAMIC 0.1uF 25V
C133	1-163-038-00	s	CERAMIC 0.1uF 25V
C134	1-163-038-00	s	CERAMIC 0.1uF 25V
C135	1-163-038-00	s	CERAMIC 0.1uF 25V
C136	1-163-038-00	s	CERAMIC 0.1uF 25V
C137	1-163-038-00	s	CERAMIC 0.1uF 25V
C138	1-163-038-00	s	CERAMIC 0.1uF 25V
C139	1-163-038-00	s	CERAMIC 0.1uF 25V
C140	1-163-038-00	s	CERAMIC 0.1uF 25V
C141	1-163-038-00	s	CERAMIC 0.1uF 25V
C142	1-163-038-00	s	CERAMIC 0.1uF 25V
C143	1-163-038-00	s	CERAMIC 0.1uF 25V
C144	1-163-038-00	s	CERAMIC 0.1uF 25V
C145	1-163-038-00	s	CERAMIC 0.1uF 25V
C146	1-163-038-00	s	CERAMIC 0.1uF 25V
C147	1-163-038-00	s	CERAMIC 0.1uF 25V
C148	1-163-038-00	s	CERAMIC 0.1uF 25V
C149	1-163-038-00	s	CERAMIC 0.1uF 25V
C150	1-163-038-00	s	CERAMIC 0.1uF 25V
C151	1-163-038-00	s	CERAMIC 0.1uF 25V
C152	1-163-038-00	s	CERAMIC 0.1uF 25V
C153	1-163-038-00	s	CERAMIC 0.1uF 25V
C154	1-163-038-00	s	CERAMIC 0.1uF 25V
C155	1-163-038-00	s	CERAMIC 0.1uF 25V
C156	1-163-038-00	s	CERAMIC 0.1uF 25V
C157	1-163-038-00	s	CERAMIC 0.1uF 25V
C158	1-163-038-00	s	CERAMIC 0.1uF 25V
C159	1-163-038-00	s	CERAMIC 0.1uF 25V
C160	1-163-038-00	s	CERAMIC 0.1uF 25V
C161	1-163-038-00	s	CERAMIC 0.1uF 25V
C162	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C163	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C164	1-163-038-00	s	CERAMIC 0.1uF 25V
C165	1-163-038-00	s	CERAMIC 0.1uF 25V
C166	1-163-038-00	s	CERAMIC 0.1uF 25V
C167	1-163-038-00	s	CERAMIC 0.1uF 25V
C168	1-163-038-00	s	CERAMIC 0.1uF 25V
C169	1-163-038-00	s	CERAMIC 0.1uF 25V
C170	1-163-038-00	s	CERAMIC 0.1uF 25V
C171	1-163-038-00	s	CERAMIC 0.1uF 25V
C172	1-163-038-00	s	CERAMIC 0.1uF 25V
C173	1-163-038-00	s	CERAMIC 0.1uF 25V
C174	1-163-038-00	s	CERAMIC 0.1uF 25V
C175	1-163-038-00	s	CERAMIC 0.1uF 25V
C176	1-163-038-00	s	CERAMIC 0.1uF 25V
C177	1-163-038-00	s	CERAMIC 0.1uF 25V
C178	1-163-038-00	s	CERAMIC 0.1uF 25V
C179	1-163-038-00	s	CERAMIC 0.1uF 25V
C180	1-163-038-00	s	CERAMIC 0.1uF 25V
C181	1-163-038-00	s	CERAMIC 0.1uF 25V
C182	1-163-038-00	s	CERAMIC 0.1uF 25V
C183	1-163-038-00	s	CERAMIC 0.1uF 25V
C184	1-163-038-00	s	CERAMIC 0.1uF 25V
C185	1-163-038-00	s	CERAMIC 0.1uF 25V
C186	1-163-038-00	s	CERAMIC 0.1uF 25V
C187	1-163-038-00	s	CERAMIC 0.1uF 25V
C188	1-163-038-00	s	CERAMIC 0.1uF 25V
C189	1-163-038-00	s	CERAMIC 0.1uF 25V
C190	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C191	1-163-038-00	s	CERAMIC 0.1uF 25V
C192	1-163-038-00	s	CERAMIC 0.1uF 25V
C193	1-163-038-00	s	CERAMIC 0.1uF 25V
C194	1-163-038-00	s	CERAMIC 0.1uF 25V
C195	1-163-038-00	s	CERAMIC 0.1uF 25V
C196	1-163-038-00	s	CERAMIC 0.1uF 25V
C197	1-163-038-00	s	CERAMIC 0.1uF 25V
C198	1-163-038-00	s	CERAMIC 0.1uF 25V
C199	1-163-038-00	s	CERAMIC 0.1uF 25V
C200	1-163-038-00	s	CERAMIC 0.1uF 25V
C201	1-163-038-00	s	CERAMIC 0.1uF 25V
C202	1-163-038-00	s	CERAMIC 0.1uF 25V
C203	1-163-038-00	s	CERAMIC 0.1uF 25V
C204	1-163-038-00	s	CERAMIC 0.1uF 25V
C205	1-163-038-00	s	CERAMIC 0.1uF 25V
C206	1-163-038-00	s	CERAMIC 0.1uF 25V
C207	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C208	1-163-038-00	s	CERAMIC 0.1uF 25V
C209	1-163-038-00	s	CERAMIC 0.1uF 25V
C210	1-163-038-00	s	CERAMIC 0.1uF 25V
C211	1-163-038-00	s	CERAMIC 0.1uF 25V
C212	1-163-038-00	s	CERAMIC 0.1uF 25V
C213	1-163-038-00	s	CERAMIC 0.1uF 25V
C214	1-163-038-00	s	CERAMIC 0.1uF 25V
C215	1-163-038-00	s	CERAMIC 0.1uF 25V
C216	1-163-038-00	s	CERAMIC 0.1uF 25V
C217	1-163-038-00	s	CERAMIC 0.1uF 25V
C218	1-163-038-00	s	CERAMIC 0.1uF 25V
C219	1-163-038-00	s	CERAMIC 0.1uF 25V
C220	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C221	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C222	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C223	1-163-038-00	s	CERAMIC 0.1uF 25V
C224	1-163-038-00	s	CERAMIC 0.1uF 25V
C225	1-163-038-00	s	CERAMIC 0.1uF 25V
C226	1-163-038-00	s	CERAMIC 0.1uF 25V
C227	1-163-038-00	s	CERAMIC 0.1uF 25V
C228	1-163-038-00	s	CERAMIC 0.1uF 25V
C229	1-163-038-00	s	CERAMIC 0.1uF 25V
C230	1-163-038-00	s	CERAMIC 0.1uF 25V
C231	1-163-038-00	s	CERAMIC 0.1uF 25V
C232	1-163-038-00	s	CERAMIC 0.1uF 25V
C233	1-163-038-00	s	CERAMIC 0.1uF 25V
C234	1-163-038-00	s	CERAMIC 0.1uF 25V
C235	1-163-038-00	s	CERAMIC 0.1uF 25V
C236	1-163-038-00	s	CERAMIC 0.1uF 25V
C237	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C238	1-163-038-00	s	CERAMIC 0.1uF 25V
C239	1-163-038-00	s	CERAMIC 0.1uF 25V
C240	1-163-038-00	s	CERAMIC 0.1uF 25V
C241	1-163-038-00	s	CERAMIC 0.1uF 25V
C242	1-163-038-00	s	CERAMIC 0.1uF 25V
C243	1-163-038-00	s	CERAMIC 0.1uF 25V
C244	1-163-038-00	s	CERAMIC 0.1uF 25V
C245	1-163-038-00	s	CERAMIC 0.1uF 25V
C246	1-163-038-00	s	CERAMIC 0.1uF 25V
C247	1-163-038-00	s	CERAMIC 0.1uF 25V
C248	1-163-038-00	s	CERAMIC 0.1uF 25V
C249	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C250	1-163-038-00	s	CERAMIC 0.1uF 25V
C251	1-163-038-00	s	CERAMIC 0.1uF 25V
C252	1-163-038-00	s	CERAMIC 0.1uF 25V
C253	1-163-038-00	s	CERAMIC 0.1uF 25V
C254	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C255	1-163-038-00	s	CERAMIC 0.1uF 25V
C256	1-163-038-00	s	CERAMIC 0.1uF 25V
C257	1-163-038-00	s	CERAMIC 0.1uF 25V
C258	1-163-038-00	s	CERAMIC 0.1uF 25V
C259	1-163-038-00	s	CERAMIC 0.1uF 25V
C260	1-163-038-00	s	CERAMIC 0.1uF 25V
C261	1-163-038-00	s	CERAMIC 0.1uF 25V
C262	1-163-038-00	s	CERAMIC 0.1uF 25V
C263	1-163-038-00	s	CERAMIC 0.1uF 25V
C264	1-163-038-00	s	CERAMIC 0.1uF 25V
C265	1-163-038-00	s	CERAMIC 0.1uF 25V
C266	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C267	1-163-038-00	s	CERAMIC 0.1uF 25V
C268	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C269	1-163-038-00	s	CERAMIC 0.1uF 25V
C270	1-163-038-00	s	CERAMIC 0.1uF 25V
C271	1-163-038-00	s	CERAMIC 0.1uF 25V
C272	1-163-038-00	s	CERAMIC 0.1uF 25V
C273	1-163-038-00	s	CERAMIC 0.1uF 25V
C274	1-163-038-00	s	CERAMIC 0.1uF 25V
C275	1-163-038-00	s	CERAMIC 0.1uF 25V
C276	1-163-038-00	s	CERAMIC 0.1uF 25V
C277	1-163-038-00	s	CERAMIC 0.1uF 25V
C278	1-163-038-00	s	CERAMIC 0.1uF 25V
C279	1-163-038-00	s	CERAMIC 0.1uF 25V
C280	1-163-038-00	s	CERAMIC 0.1uF 25V
C281	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C282	1-163-038-00	s	CERAMIC 0.1uF 25V
C283	1-163-038-00	s	CERAMIC 0.1uF 25V
C284	1-163-038-00	s	CERAMIC 0.1uF 25V
C285	1-163-038-00	s	CERAMIC 0.1uF 25V
C286	1-163-038-00	s	CERAMIC 0.1uF 25V
C287	1-163-038-00	s	CERAMIC 0.1uF 25V
C288	1-163-038-00	s	CERAMIC 0.1uF 25V
C289	1-163-038-00	s	CERAMIC 0.1uF 25V
C290	1-163-038-00	s	CERAMIC 0.1uF 25V
C291	1-163-038-00	s	CERAMIC 0.1uF 25V
C292	1-163-038-00	s	CERAMIC 0.1uF 25V
C293	1-163-038-00	s	CERAMIC 0.1uF 25V
C294	1-163-038-00	s	CERAMIC 0.1uF 25V
C295	1-163-038-00	s	CERAMIC 0.1uF 25V
C296	1-163-038-00	s	CERAMIC 0.1uF 25V
C297	1-163-038-00	s	CERAMIC 0.1uF 25V
C298	1-163-038-00	s	CERAMIC 0.1uF 25V
C299	1-163-038-00	s	CERAMIC 0.1uF 25V
C300	1-163-038-00	s	CERAMIC 0.1uF 25V
C301	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C302	1-163-038-00	s	CERAMIC 0.1uF 25V
C303	1-163-038-00	s	CERAMIC 0.1uF 25V
C304	1-163-038-00	s	CERAMIC 0.1uF 25V
C305	1-163-038-00	s	CERAMIC 0.1uF 25V
C306	1-163-038-00	s	CERAMIC 0.1uF 25V
C307	1-163-038-00	s	CERAMIC 0.1uF 25V
C308	1-163-038-00	s	CERAMIC 0.1uF 25V
C309	1-163-038-00	s	CERAMIC 0.1uF 25V
C310	1-163-038-00	s	CERAMIC 0.1uF 25V
C311	1-163-038-00	s	CERAMIC 0.1uF 25V
C312	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C313	1-163-038-00	s	CERAMIC 0.1uF 25V
C314	1-163-038-00	s	CERAMIC 0.1uF 25V
C315	1-163-038-00	s	CERAMIC 0.1uF 25V
C316	1-163-038-00	s	CERAMIC 0.1uF 25V
C317	1-163-038-00	s	CERAMIC 0.1uF 25V
C318	1-163-038-00	s	CERAMIC 0.1uF 25V
C319	1-163-038-00	s	CERAMIC 0.1uF 25V
C320	1-163-038-00	s	CERAMIC 0.1uF 25V
C321	1-163-038-00	s	CERAMIC 0.1uF 25V
C322	1-163-038-00	s	CERAMIC 0.1uF 25V
C323	1-163-038-00	s	CERAMIC 0.1uF 25V
C324	1-163-038-00	s	CERAMIC 0.1uF 25V
C325	1-163-038-00	s	CERAMIC 0.1uF 25V
C326	1-163-038-00	s	CERAMIC 0.1uF 25V
C327	1-163-038-00	s	CERAMIC 0.1uF 25V
C328	1-163-038-00	s	CERAMIC 0.1uF 25V
C329	1-163-038-00	s	CERAMIC 0.1uF 25V
C330	1-163-038-00	s	CERAMIC 0.1uF 25V
C331	1-163-038-00	s	CERAMIC 0.1uF 25V
C332	1-163-038-00	s	CERAMIC 0.1uF 25V
C333	1-163-038-00	s	CERAMIC 0.1uF 25V
C334	1-163-038-00	s	CERAMIC 0.1uF 25V
C335	1-163-038-00	s	CERAMIC 0.1uF 25V
C336	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C337	1-163-038-00	s	CERAMIC 0.1uF 25V
C338	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C339	1-163-038-00	s	CERAMIC 0.1uF 25V
C340	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C341	1-163-038-00	s	CERAMIC 0.1uF 25V
C342	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C343	1-163-038-00	s	CERAMIC 0.1uF 25V
C344	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C345	1-163-038-00	s	CERAMIC 0.1uF 25V
C346	1-163-038-00	s	CERAMIC 0.1uF 25V
C347	1-163-038-00	s	CERAMIC 0.1uF 25V
C348	1-163-038-00	s	CERAMIC 0.1uF 25V
C349	1-163-038-00	s	CERAMIC 0.1uF 25V
C350	1-163-038-00	s	CERAMIC 0.1uF 25V
C351	1-163-038-00	s	CERAMIC 0.1uF 25V
C352	1-163-038-00	s	CERAMIC 0.1uF 25V
C353	1-163-038-00	s	CERAMIC 0.1uF 25V
C354	1-163-038-00	s	CERAMIC 0.1uF 25V
C355	1-163-038-00	s	CERAMIC 0.1uF 25V
C356	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C357	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C358	1-163-038-00	s	CERAMIC 0.1uF 25V
C359	1-163-038-00	s	CERAMIC 0.1uF 25V
C360	1-163-038-00	s	CERAMIC 0.1uF 25V
C361	1-163-038-00	s	CERAMIC 0.1uF 25V
C362	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C363	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C364	1-163-038-00	s	CERAMIC 0.1uF 25V
C365	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C366	1-163-038-00	s	CERAMIC 0.1uF 25V
C367	1-163-038-00	s	CERAMIC 0.1uF 25V
C368	1-163-038-00	s	CERAMIC 0.1uF 25V
C369	1-163-038-00	s	CERAMIC 0.1uF 25V
C370	1-163-038-00	s	CERAMIC 0.1uF 25V
C404	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C474	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C532	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C574	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C586	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C607	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C608	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C644	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C645	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C646	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C647	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C648	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C649	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C650	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C651	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-764-615-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-764-615-11	s	CONNECTOR, BB 100P, FEMALE
CN3	1-764-615-11	s	CONNECTOR, BB 100P, FEMALE
D1	8-719-975-84	s	DIODE AY1101W-88
D2	8-719-975-84	s	DIODE AY1101W-88
IC1	8-759-466-56	s	IC 74LCX86MTCX
IC2	8-759-389-26	s	IC 74LCX08MTCX
IC3	8-759-389-48	s	IC 74LCX16374MTDX
IC4	8-759-466-59	s	IC CGS2535TVX
IC5	8-759-466-59	s	IC CGS2535TVX
IC6	8-759-466-58	s	IC CGS2534TVX
IC7 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC8	8-759-386-27	s	IC 74LCX04MTCX
IC9 *b	8-759-464-48	s	IC CXD8900J
IC10 *b	8-759-464-48	s	IC CXD8900J
IC11	8-759-386-27	s	IC 74LCX04MTCX
IC12	8-759-389-48	s	IC 74LCX16374MTDX
IC13 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC14	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC15 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC16 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC17	8-759-466-63	s	IC CXD8895Q
IC18	8-759-505-02	s	IC CXD8053Q
IC19	8-759-505-02	s	IC CXD8053Q
IC20	8-759-389-48	s	IC 74LCX16374MTDX
IC21 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC22 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC23 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC24 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC25 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC26 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC27 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC28 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC29 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC30 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC31 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC32 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC33 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC34	8-759-531-41	o	IC WS57C71-MOS MSB
IC35 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC36 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC37	8-759-389-48	s	IC 74LCX16374MTDX
IC38	8-759-389-48	s	IC 74LCX16374MTDX
IC39	8-759-531-43	o	IC WS57C51-SIN MSB
IC40 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC41	8-759-389-48	s	IC 74LCX16374MTDX
IC42	8-759-505-09	s	IC CXD8061

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC43	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC44	8-759-072-97	s	IC ZA4041
IC45 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC46	8-759-505-02	s	IC CXD8053Q
IC47 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC48	8-759-505-02	s	IC CXD8053Q
IC49	8-759-389-48	s	IC 74LCX16374MTDX
IC50 *b	8-759-464-48	s	IC CXD8900J
IC51	8-759-389-48	s	IC 74LCX16374MTDX
IC52	8-759-389-48	s	IC 74LCX16374MTDX
IC53 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC54	8-759-360-61	s	IC CXD8848AQ
IC55	8-759-505-08	s	IC CXD8060Q
IC56	8-759-505-08	s	IC CXD8060Q
IC57	8-759-360-61	s	IC CXD8848AQ
IC58	8-759-389-48	s	IC 74LCX16374MTDX
IC59	8-759-466-63	s	IC CXD8895Q
IC60 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC61	8-759-531-42	o	IC WS57C51-SIN LSB
IC62 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC63	8-759-389-48	s	IC 74LCX16374MTDX
IC64	8-759-389-48	s	IC 74LCX16374MTDX
IC65	8-759-389-48	s	IC 74LCX16374MTDX
IC66	8-759-531-45	o	IC WS57C71-ENH MSB
IC67	8-759-531-44	o	IC WS57C71-ENH LSB
IC68	8-759-072-97	s	IC ZA4041
IC69	8-759-456-26	s	IC 74LCX541MTCX
IC70	8-759-523-49	s	IC TC74ACT541FT(EL)
IC71	8-759-456-26	s	IC 74LCX541MTCX
IC72	8-759-466-63	s	IC CXD8895Q
IC73	8-759-386-26	s	IC 74LCX574MTCX
IC74 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC75	8-759-386-26	s	IC 74LCX574MTCX
IC76	8-759-456-26	s	IC 74LCX541MTCX
IC77	8-759-456-26	s	IC 74LCX541MTCX
IC78 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC79	8-759-531-43	o	IC WS57C51-SIN MSB
IC80	8-759-389-48	s	IC 74LCX16374MTDX
IC81	8-759-466-63	s	IC CXD8895Q
IC82	8-759-389-48	s	IC 74LCX16374MTDX
IC83	8-759-389-48	s	IC 74LCX16374MTDX
IC84	8-759-389-48	s	IC 74LCX16374MTDX
IC85	8-759-505-09	s	IC CXD8061
IC86	8-759-505-00	s	IC CXD8052Q
IC87 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC88	8-759-505-06	s	IC CXD8058Q

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC89	8-759-505-08	s	IC CXD8060Q
IC90	8-759-456-26	s	IC 74LCX541MTCX
IC91	8-759-523-49	s	IC TC74ACT541FT(EL)
IC92	8-759-505-08	s	IC CXD8060Q
IC93	8-759-360-61	s	IC CXD8848AQ
IC94 *b	8-759-464-48	s	IC CXD8900J
IC95	8-759-360-61	s	IC CXD8848AQ
IC96	8-759-389-48	s	IC 74LCX16374MTDX
IC97	8-759-389-48	s	IC 74LCX16374MTDX
IC98	8-759-389-48	s	IC 74LCX16374MTDX
IC99	8-759-456-26	s	IC 74LCX541MTCX
IC100	8-759-456-26	s	IC 74LCX541MTCX
IC101	8-759-531-42	o	IC WS57C51-SIN LSB
IC102	8-759-389-48	s	IC 74LCX16374MTDX
IC103	8-759-531-45	o	IC WS57C71-ENH MSB
IC104	8-759-531-44	o	IC WS57C71-ENH LSB
IC105	8-759-389-30	s	IC 74LCX32MTCX
IC106	8-759-389-48	s	IC 74LCX16374MTDX
IC107	8-759-389-26	s	IC 74LCX08MTCX
IC108	8-759-466-59	s	IC CGS2535TVX
IC109	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC110 *b	8-759-464-48	s	IC CXD8900J
IC111 *b	8-759-464-48	s	IC CXD8900J
IC112	8-759-386-28	s	IC 74LCX00MTCX
IC113	8-759-389-48	s	IC 74LCX16374MTDX
IC114 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC115 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC116 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC117	8-759-505-02	s	IC CXD8053Q
IC118	8-759-505-02	s	IC CXD8053Q
IC119	8-759-505-02	s	IC CXD8053Q
IC120	8-759-389-48	s	IC 74LCX16374MTDX
IC121 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC122 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC123 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC124 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC125 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC126	8-759-389-26	s	IC 74LCX08MTCX
IC127 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC128 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC129 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC130 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC131 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC132	8-759-531-40	o	IC WS57C71-MOS LSB
IC133 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC ICT74FCT16374ETPA-TL
IC134 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC135 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC136 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC137 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC138 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC139 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC140	8-759-386-27	s	IC 74LCX04MTCX
IC141	8-759-389-48	s	IC 74LCX16374MTDX
IC142	8-759-531-43	o	IC WS57C51-SIN MSB
IC143	8-759-389-48	s	IC 74LCX16374MTDX
IC144	8-759-072-97	s	IC ZA4041
IC145	8-759-389-48	s	IC 74LCX16374MTDX
IC146 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC147 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC148	8-759-531-45	o	IC WS57C71-ENH MSB
IC149	8-759-531-44	o	IC WS57C71-ENH LSB
IC150	8-759-386-26	s	IC 74LCX574MTCX
IC151 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC152	8-759-505-02	s	IC CXD8053Q
IC153	8-759-505-02	s	IC CXD8053Q
IC154	8-759-389-48	s	IC 74LCX16374MTDX
IC155	8-759-389-48	s	IC 74LCX16374MTDX
IC156	8-759-389-48	s	IC 74LCX16374MTDX
IC157 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC158	8-759-360-61	s	IC CXD8848AQ
IC159	8-759-505-08	s	IC CXD8060Q
IC160	8-759-505-08	s	IC CXD8060Q
IC161	8-759-360-61	s	IC CXD8848AQ
IC162	8-759-389-48	s	IC 74LCX16374MTDX
IC163	8-759-466-63	s	IC CXD8895Q
IC164	8-759-466-56	s	IC 74LCX86MTCX
IC165 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC166	8-759-531-42	o	IC WS57C51-SIN LSB
IC167 *d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC168	8-759-389-48	s	IC 74LCX16374MTDX
IC169	8-759-505-09	s	IC CXD8061
IC170	8-759-072-97	s	IC ZA4041
IC171	8-759-389-48	s	IC 74LCX16374MTDX
IC172	8-759-389-48	s	IC 74LCX16374MTDX

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC173	8-759-456-26	s	IC 74LCX541MTCX
IC174	8-759-499-65	o	IC EPM7032-DUST-V1
IC175	8-759-523-49	s	IC TC74ACT541FT(EL)
IC176	8-759-523-49	s	IC TC74ACT541FT(EL)
IC177	8-759-389-48	s	IC 74LCX16374MTDX
IC178	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC179	8-759-466-56	s	IC 74LCX86MTCX
IC180	8-759-523-49	s	IC TC74ACT541FT(EL)
IC181	8-759-523-49	s	IC TC74ACT541FT(EL)
IC182 *e	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
*d	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
*c	8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC183	8-759-531-43	o	IC WS57C51-SIN MSB
IC184	8-759-389-48	s	IC 74LCX16374MTDX
IC185	8-759-389-48	s	IC 74LCX16374MTDX
IC186	8-759-505-00	s	IC CXD8052Q
IC187	8-759-389-48	s	IC 74LCX16374MTDX
IC188	8-759-466-63	s	IC CXD8895Q
IC189	8-759-389-48	s	IC 74LCX16374MTDX
IC190	8-759-531-44	o	IC WS57C71-ENH LSB
IC191	8-759-531-45	o	IC WS57C71-ENH MSB
IC192	8-759-466-56	s	IC 74LCX86MTCX
IC193	8-759-523-49	s	IC TC74ACT541FT(EL)
IC194	8-759-523-49	s	IC TC74ACT541FT(EL)
IC195	8-759-505-08	s	IC CXD8060Q
IC196	8-759-505-08	s	IC CXD8060Q
IC197	8-759-360-61	s	IC CXD8848AQ
IC198	8-759-360-61	s	IC CXD8848AQ
IC199	8-759-389-48	s	IC 74LCX16374MTDX
IC200	8-759-389-48	s	IC 74LCX16374MTDX
IC201	8-759-389-48	s	IC 74LCX16374MTDX
IC202	8-759-531-42	o	IC WS57C51-SIN LSB
IC203	8-759-469-98	s	IC CAT93C66K-LE10
IC204	8-759-271-82	s	IC DS3695ATM
IC205	8-759-523-49	s	IC TC74ACT541FT(EL)
IC206	8-759-456-26	s	IC 74LCX541MTCX
IC207	8-759-389-48	s	IC 74LCX16374MTDX
IC208	8-759-505-09	s	IC CXD8061
IC209	8-759-389-48	s	IC 74LCX16374MTDX
IS34 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS39 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS61 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS66 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS67 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS79 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS101 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS103 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS104 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS132 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS142 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IS148 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS149 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS166 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS174	1-251-047-11	s	SOCKET, IC
IS183 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS190 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS191 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
IS202 *b	1-540-151-21	s	SOCKET, IC
*a	1-540-151-11	s	SOCKET, IC
R1	1-216-295-91	s	RES, CHIP 0
R2	1-216-295-91	s	RES, CHIP 0
R3	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R4	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R5	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R6	1-216-295-91	s	RES, CHIP 0
R7	1-216-295-91	s	RES, CHIP 0
R8	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R12	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R14	1-216-295-91	s	RES, CHIP 0
R16	1-216-295-91	s	RES, CHIP 0
R18	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R20	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R21	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R24	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R25	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R27	1-216-295-91	s	RES, CHIP 0
R28	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R29	1-216-295-91	s	RES, CHIP 0
R30	1-216-295-91	s	RES, CHIP 0
R31	1-216-295-91	s	RES, CHIP 0
R32	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R35	1-216-295-91	s	RES, CHIP 0
R36	1-216-295-91	s	RES, CHIP 0
R37	1-216-295-91	s	RES, CHIP 0
R38	1-216-295-91	s	RES, CHIP 0
R39	1-216-295-91	s	RES, CHIP 0
R41	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R42	1-216-295-91	s	RES, CHIP 0
R44	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R45	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R47	1-216-295-91	s	RES, CHIP 0
R50	1-216-295-91	s	RES, CHIP 0
R51	1-216-295-91	s	RES, CHIP 0
R52	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R53	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R56	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R58	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R59	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R61	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R62	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R64	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R66	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R68	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R70	1-216-295-91	s	RES, CHIP 0

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R71	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R73	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R76	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R77	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R79	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R80	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R84	1-216-295-91	s	RES, CHIP 0
R85	1-216-295-91	s	RES, CHIP 0
R86	1-216-295-91	s	RES, CHIP 0
R88	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R89	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R92	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R93	1-216-295-91	s	RES, CHIP 0
R96	1-216-295-91	s	RES, CHIP 0
R97	1-216-295-91	s	RES, CHIP 0
R98	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R99	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R100	1-216-295-91	s	RES, CHIP 0
R102	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R103	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R104	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R108	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R109	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R111	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R112	1-216-295-91	s	RES, CHIP 0
R113	1-216-295-91	s	RES, CHIP 0
R114	1-216-295-91	s	RES, CHIP 0
R115	1-216-295-91	s	RES, CHIP 0
R117	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R118	1-216-295-91	s	RES, CHIP 0
R119	1-216-295-91	s	RES, CHIP 0
R120	1-216-295-91	s	RES, CHIP 0
R121	1-216-295-91	s	RES, CHIP 0
R122	1-216-295-91	s	RES, CHIP 0
R124	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R126	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R127	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R129	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R131	1-216-651-11	s	METAL, CHIP 1K 0.5% 1/10W
R132	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W
R134	1-216-295-91	s	RES, CHIP 0
R135	1-216-295-91	s	RES, CHIP 0
R136	1-216-295-91	s	RES, CHIP 0
R137	1-216-295-91	s	RES, CHIP 0
R138	1-216-295-91	s	RES, CHIP 0
R139	1-216-295-91	s	RES, CHIP 0
R140	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R141	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R142	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R143	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R146	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R151	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R152	1-216-295-91	s	RES, CHIP 0
R153	1-216-295-91	s	RES, CHIP 0
R154	1-216-295-91	s	RES, CHIP 0
R156	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R157	1-216-295-91	s	RES, CHIP 0
R158	1-216-295-91	s	RES, CHIP 0
R160	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R161	1-216-295-91	s	RES, CHIP 0
R162	1-216-295-91	s	RES, CHIP 0
R163	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R165	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R167	1-216-295-91	s	RES, CHIP 0
R168	1-216-295-91	s	RES, CHIP 0
R169	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R170	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R173	1-216-295-91	s	RES, CHIP 0
R174	1-216-295-91	s	RES, CHIP 0
R175	1-216-295-91	s	RES, CHIP 0
R176	1-216-295-91	s	RES, CHIP 0
R177	1-216-295-91	s	RES, CHIP 0
R178	1-216-295-91	s	RES, CHIP 0
R179	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R181	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
R182	1-216-611-11	s	METAL, CHIP 22 0.5% 1/10W
RB1	1-233-448-11	s	RES, CHIP NETWORK 22
RB2	1-233-448-11	s	RES, CHIP NETWORK 22
RB3	1-233-448-11	s	RES, CHIP NETWORK 22
RB4	1-233-448-11	s	RES, CHIP NETWORK 22
RB5	1-233-448-11	s	RES, CHIP NETWORK 22
RB6	1-233-448-11	s	RES, CHIP NETWORK 22
RB7	1-233-448-11	s	RES, CHIP NETWORK 22
RB8	1-233-448-11	s	RES, CHIP NETWORK 22
RB9	1-233-448-11	s	RES, CHIP NETWORK 22
RB10	1-233-448-11	s	RES, CHIP NETWORK 22
RB11	1-233-448-11	s	RES, CHIP NETWORK 22
RB12	1-233-448-11	s	RES, CHIP NETWORK 22
RB13	1-233-448-11	s	RES, CHIP NETWORK 22
RB14	1-233-448-11	s	RES, CHIP NETWORK 22
RB15	1-233-448-11	s	RES, CHIP NETWORK 22
RB16	1-233-448-11	s	RES, CHIP NETWORK 22
RB17	1-233-448-11	s	RES, CHIP NETWORK 22
RB18	1-233-448-11	s	RES, CHIP NETWORK 22
RB19	1-233-448-11	s	RES, CHIP NETWORK 22
RB20	1-233-448-11	s	RES, CHIP NETWORK 22
RB21	1-233-448-11	s	RES, CHIP NETWORK 22
RB22	1-233-448-11	s	RES, CHIP NETWORK 22
RB23	1-233-448-11	s	RES, CHIP NETWORK 22
RB24	1-233-448-11	s	RES, CHIP NETWORK 22
RB25	1-233-448-11	s	RES, CHIP NETWORK 22
RB26	1-233-448-11	s	RES, CHIP NETWORK 22
RB27	1-233-448-11	s	RES, CHIP NETWORK 22
RB28	1-233-448-11	s	RES, CHIP NETWORK 22
RB29	1-233-448-11	s	RES, CHIP NETWORK 22
RB30	1-233-448-11	s	RES, CHIP NETWORK 22
RB31	1-233-448-11	s	RES, CHIP NETWORK 22
RB32	1-233-448-11	s	RES, CHIP NETWORK 22
RB33	1-233-448-11	s	RES, CHIP NETWORK 22
RB34	1-233-448-11	s	RES, CHIP NETWORK 22
RB35	1-233-448-11	s	RES, CHIP NETWORK 22
RB36	1-233-448-11	s	RES, CHIP NETWORK 22
RB37	1-233-448-11	s	RES, CHIP NETWORK 22
RB38	1-233-448-11	s	RES, CHIP NETWORK 22
RB39	1-233-448-11	s	RES, CHIP NETWORK 22
RB40	1-233-448-11	s	RES, CHIP NETWORK 22
RB41	1-233-448-11	s	RES, CHIP NETWORK 22

(WKG-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB42	1-233-448-11	s	RES, CHIP NETWORK 22
RB43	1-233-448-11	s	RES, CHIP NETWORK 22
RB44	1-233-448-11	s	RES, CHIP NETWORK 22
RB45	1-233-448-11	s	RES, CHIP NETWORK 22
RB46	1-233-448-11	s	RES, CHIP NETWORK 22
RB47	1-233-448-11	s	RES, CHIP NETWORK 22
RB48	1-233-448-11	s	RES, CHIP NETWORK 22
RB49	1-233-448-11	s	RES, CHIP NETWORK 22
RB50	1-233-448-11	s	RES, CHIP NETWORK 22
RB51	1-233-448-11	s	RES, CHIP NETWORK 22
RB52	1-233-448-11	s	RES, CHIP NETWORK 22
RB53	1-233-448-11	s	RES, CHIP NETWORK 22
RB54	1-233-448-11	s	RES, CHIP NETWORK 22
RB55	1-233-448-11	s	RES, CHIP NETWORK 22
RB56	1-233-448-11	s	RES, CHIP NETWORK 22
RB57	1-233-448-11	s	RES, CHIP NETWORK 22
RB58	1-233-448-11	s	RES, CHIP NETWORK 22
RB59	1-233-448-11	s	RES, CHIP NETWORK 22
RB60	1-233-448-11	s	RES, CHIP NETWORK 22
RB61	1-233-448-11	s	RES, CHIP NETWORK 22
RB62	1-233-448-11	s	RES, CHIP NETWORK 22
RB63	1-233-448-11	s	RES, CHIP NETWORK 22
RB64	1-233-448-11	s	RES, CHIP NETWORK 22
RB65	1-233-448-11	s	RES, CHIP NETWORK 22
RB66	1-233-448-11	s	RES, CHIP NETWORK 22
RB67	1-233-448-11	s	RES, CHIP NETWORK 22
RB68	1-233-448-11	s	RES, CHIP NETWORK 22
RB69	1-233-448-11	s	RES, CHIP NETWORK 22
RB70	1-233-448-11	s	RES, CHIP NETWORK 22
RB71	1-233-448-11	s	RES, CHIP NETWORK 22
RB72	1-233-448-11	s	RES, CHIP NETWORK 22
RB73	1-233-448-11	s	RES, CHIP NETWORK 22
RB74	1-233-448-11	s	RES, CHIP NETWORK 22
RB75	1-233-448-11	s	RES, CHIP NETWORK 22
RB76	1-233-448-11	s	RES, CHIP NETWORK 22
RB77	1-233-448-11	s	RES, CHIP NETWORK 22
RB78	1-233-448-11	s	RES, CHIP NETWORK 22
RB79	1-233-448-11	s	RES, CHIP NETWORK 22
RB80	1-233-448-11	s	RES, CHIP NETWORK 22
RB81	1-233-448-11	s	RES, CHIP NETWORK 22
RB82	1-233-448-11	s	RES, CHIP NETWORK 22
RB83	1-233-448-11	s	RES, CHIP NETWORK 22
RB84	1-233-448-11	s	RES, CHIP NETWORK 22
RB85	1-233-448-11	s	RES, CHIP NETWORK 22
RB86	1-233-448-11	s	RES, CHIP NETWORK 22

WKG-26 BOARD

*a:[Lot No. 710 - 807]
*b:[Lot No. 710 - 805]
*c:[Lot No. 806 -]
*d:[Lot No. 806 - 807]
*e:[Lot No. 808 -]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8317-494-A	o	MOUNTED CIRCUIT BOARD, WKG-26
C1	1-163-038-00	s	CERAMIC 0.1uF 25V
C2	1-163-038-00	s	CERAMIC 0.1uF 25V
C3	1-163-038-00	s	CERAMIC 0.1uF 25V
C4	1-163-038-00	s	CERAMIC 0.1uF 25V
C5	1-163-038-00	s	CERAMIC 0.1uF 25V
C6	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C7	1-163-038-00	s	CERAMIC 0.1uF 25V
C8	1-163-038-00	s	CERAMIC 0.1uF 25V
C9	1-163-038-00	s	CERAMIC 0.1uF 25V
C10	1-163-038-00	s	CERAMIC 0.1uF 25V
C11	1-163-038-00	s	CERAMIC 0.1uF 25V
C12	1-163-038-00	s	CERAMIC 0.1uF 25V
C13	1-163-038-00	s	CERAMIC 0.1uF 25V
C14	1-163-038-00	s	CERAMIC 0.1uF 25V
C15	1-163-038-00	s	CERAMIC 0.1uF 25V
C16	1-163-038-00	s	CERAMIC 0.1uF 25V
C17	1-163-038-00	s	CERAMIC 0.1uF 25V
C18	1-163-038-00	s	CERAMIC 0.1uF 25V
C19	1-163-038-00	s	CERAMIC 0.1uF 25V
C20	1-163-038-00	s	CERAMIC 0.1uF 25V
C21	1-163-038-00	s	CERAMIC 0.1uF 25V
C22	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C23	1-163-038-00	s	CERAMIC 0.1uF 25V
C24	1-163-038-00	s	CERAMIC 0.1uF 25V
C25	1-163-038-00	s	CERAMIC 0.1uF 25V
C26	1-163-038-00	s	CERAMIC 0.1uF 25V
C27	1-163-038-00	s	CERAMIC 0.1uF 25V
C28	1-163-038-00	s	CERAMIC 0.1uF 25V
C29	1-163-038-00	s	CERAMIC 0.1uF 25V
C30	1-163-038-00	s	CERAMIC 0.1uF 25V
C31	1-163-038-00	s	CERAMIC 0.1uF 25V
C32	1-163-038-00	s	CERAMIC 0.1uF 25V
C33	1-163-038-00	s	CERAMIC 0.1uF 25V
C34	1-163-038-00	s	CERAMIC 0.1uF 25V
C35	1-163-038-00	s	CERAMIC 0.1uF 25V
C36	1-163-038-00	s	CERAMIC 0.1uF 25V
C37	1-163-038-00	s	CERAMIC 0.1uF 25V
C38	1-163-038-00	s	CERAMIC 0.1uF 25V
C39	1-117-372-11	s	TANTALUM 100uF 20% 10V
C40	1-163-038-00	s	CERAMIC 0.1uF 25V
C41	1-163-038-00	s	CERAMIC 0.1uF 25V
C42	1-163-038-00	s	CERAMIC 0.1uF 25V
C43	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C44	1-163-038-00	s	CERAMIC 0.1uF 25V
C45	1-163-038-00	s	CERAMIC 0.1uF 25V
C46	1-163-038-00	s	CERAMIC 0.1uF 25V
C47	1-117-372-11	s	TANTALUM 100uF 20% 10V
C48	1-163-038-00	s	CERAMIC 0.1uF 25V
C49	1-163-038-00	s	CERAMIC 0.1uF 25V
C50	1-163-038-00	s	CERAMIC 0.1uF 25V
C51	1-163-038-00	s	CERAMIC 0.1uF 25V

(WKG-26 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C52	1-163-038-00	s	CERAMIC 0.1uF 25V
C53	1-163-038-00	s	CERAMIC 0.1uF 25V
C54	1-163-038-00	s	CERAMIC 0.1uF 25V
C55	1-163-038-00	s	CERAMIC 0.1uF 25V
C56	1-163-038-00	s	CERAMIC 0.1uF 25V
C57	1-163-038-00	s	CERAMIC 0.1uF 25V
C58	1-163-038-00	s	CERAMIC 0.1uF 25V
C59	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C60	1-163-038-00	s	CERAMIC 0.1uF 25V
C61	1-163-038-00	s	CERAMIC 0.1uF 25V
C62	1-163-038-00	s	CERAMIC 0.1uF 25V
C63	1-163-038-00	s	CERAMIC 0.1uF 25V
C64	1-163-038-00	s	CERAMIC 0.1uF 25V
C65	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C66	1-163-038-00	s	CERAMIC 0.1uF 25V
C67	1-163-038-00	s	CERAMIC 0.1uF 25V
C68	1-163-038-00	s	CERAMIC 0.1uF 25V
C69	1-163-038-00	s	CERAMIC 0.1uF 25V
C70	1-163-038-00	s	CERAMIC 0.1uF 25V
C71	1-163-038-00	s	CERAMIC 0.1uF 25V
CN1	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
CN2	1-770-600-11	s	CONNECTOR, BB 100P, FEMALE
IC1	*c 8-759-572-89	s	IC IDT74FCT162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC2	*c 8-759-572-89	s	IC IDT74FCT162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC3	*c 8-759-572-89	s	IC IDT74FCT162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC4	*c 8-759-572-89	s	IC IDT74FCT162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC5	8-759-271-82	s	IC DS3695ATM
IC6	8-759-389-30	s	IC 74LCX32MTCX
IC7	*e 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
	*d 8-759-572-89	s	IC IDT74FC162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC8	*e 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
	*d 8-759-572-89	s	IC IDT74FC162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC9	8-759-389-26	s	IC 74LCX08MTCX
IC10	8-759-469-98	s	IC CAT93C66K-LE10
IC11	*e 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
	*d 8-759-572-89	s	IC IDT74FC162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC12	8-759-386-28	s	IC 74LCX00MTCX
IC13	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC14	8-759-456-26	s	IC 74LCX541MTCX
IC15	8-759-386-27	s	IC 74LCX04MTCX
IC16	*e 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
	*d 8-759-572-89	s	IC IDT74FC162374ETPA-TL
	*b 8-759-528-53	s	IC IDT74FCT16374ETPA-TL
IC17	8-759-505-00	s	IC CXD8052Q
IC18	8-759-386-26	s	IC 74LCX574MTCX
IC19	8-759-456-26	s	IC 74LCX541MTCX
IC20	8-759-456-26	s	IC 74LCX541MTCX
IC21	8-759-360-61	s	IC CXD8848AQ
IC22	8-759-360-61	s	IC CXD8848AQ
IC23	8-759-360-61	s	IC CXD8848AQ
IC24	8-759-360-61	s	IC CXD8848AQ
R1	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R3	1-216-295-91	s	RES, CHIP 0

(WKG-26 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4	1-216-295-91	s	RES, CHIP 0
R6	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R7 *e	1-216-603-11	s	RESISTOR, CHIP 10 1/10W(2012)
*a	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R8	1-216-295-91	s	RES, CHIP 0
R9	1-216-295-91	s	RES, CHIP 0
R10	1-216-295-91	s	RES, CHIP 0
R11	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R12	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R13	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R14	1-216-295-91	s	RES, CHIP 0
R15	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R16	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R17	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R18	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R19	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R20	1-216-295-91	s	RES, CHIP 0
R21	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R22	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R23	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R24	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R25	1-216-295-91	s	RES, CHIP 0
R26	1-216-295-91	s	RES, CHIP 0
R27	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R28	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R29	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R30	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R31	1-216-295-91	s	RES, CHIP 0
R32	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R33	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R34	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R35	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R36	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R37	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R38	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R39	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R40	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R41	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R42	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R43	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R44	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R45	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R47	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R48	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R49	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R50	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R51	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R52	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R53	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R54	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R55	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R56	1-216-295-91	s	RES, CHIP 0
R57	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R58	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R59	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R60	1-216-612-11	s	METAL, CHIP 24 0.5% 1/10W
R61	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
R63	1-216-295-91	s	RES, CHIP 0
R64	1-216-295-91	s	RES, CHIP 0

(WKG-26 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R65	1-216-295-91	s	RES, CHIP 0
R66	1-216-295-91	s	RES, CHIP 0
R67	1-216-295-91	s	RES, CHIP 0
R68	1-216-295-91	s	RES, CHIP 0
R69	1-216-295-91	s	RES, CHIP 0
R71	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W
RB2	1-233-448-11	s	RES, CHIP NETWORK 22
RB3	1-233-448-11	s	RES, CHIP NETWORK 22
RB4	1-233-448-11	s	RES, CHIP NETWORK 22
RB5	1-233-448-11	s	RES, CHIP NETWORK 22

WKG-29 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8322-466-A	o	MOUNTED CIRCUIT BOARD, WKG-29
2pcs	3-194-878-01	s	LEVER, PC BOARD
4pcs	4-886-821-11	s	SCREW,M3X6 CASE (SILVER)
2pcs	7-626-320-11	s	SPRING PIN,3X8 (STEEL)
6pcs	7-685-104-21	s	SCREW,+PTP 2X6(EP-FE/ZN/CM2)
C1	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C2	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C3	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C4	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C6	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C8	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C9	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C10	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C11	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C12	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C13	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C14	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C15	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C16	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C17	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C18	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C19	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C20	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C22	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C23	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C24	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C25	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C26	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C27	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C28	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C29	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C32	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C33	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C35	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C36	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C37	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C38	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C39	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C41	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C43	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C44	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C45	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C46	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C47	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C48	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C49	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C50	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C51	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C52	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C53	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C54	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C55	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C57	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C58	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C59	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C62	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C63	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C64	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C65	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C66	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C67	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C68	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C69	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C70	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C71	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C72	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C73	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C74	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C75	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C76	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C77	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C78	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C79	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C80	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C81	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C82	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C83	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C84	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C85	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C86	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C87	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C88	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C89	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C90	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C91	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C92	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C93	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C94	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C95	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C96	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C97	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C98	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C99	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C100	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C106	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C107	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C109	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C119	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C120	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C121	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C130	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C134	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C137	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C138	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C139	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C140	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C141	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C142	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C143	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C144	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C145	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C146	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C147	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C148	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C149	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C150	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C152	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C153	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C154	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C155	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C158	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C159	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C160	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C161	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C162	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C163	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C164	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C165	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C166	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C167	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C168	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C169	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C170	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C171	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C172	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C173	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C174	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C175	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C176	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C178	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C179	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C180	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C181	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C182	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C183	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C184	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C185	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C186	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C187	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C188	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C189	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C190	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C191	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C192	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C193	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C194	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C195	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C196	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C197	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C198	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C199	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C204	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C205	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C206	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C207	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C208	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C212	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C213	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C214	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C215	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C216	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C217	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C218	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C219	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C220	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C221	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C222	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C223	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C224	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C225	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C226	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C227	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C228	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C229	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C230	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C231	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C232	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C233	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C234	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C235	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C236	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C237	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C238	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C239	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C240	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C241	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C242	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C243	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C244	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C245	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C246	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C247	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C248	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C249	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C250	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C251	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C252	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C254	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C255	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C256	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C257	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C258	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C259	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C260	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C261	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C262	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C263	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C264	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C265	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C266	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C267	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C268	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C269	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C270	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C271	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C272	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C273	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C274	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C275	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C276	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C277	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C278	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C279	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C280	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C281	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C282	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C283	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C284	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C285	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C286	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C287	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C288	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C289	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C290	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C291	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C292	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C293	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C294	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C295	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C296	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C297	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C298	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C299	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C300	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C302	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C304	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C305	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C306	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C307	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C308	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C309	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C310	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C311	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C312	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C313	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C314	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C315	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C316	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C317	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C318	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C319	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C320	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C321	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C322	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C323	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C324	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C325	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C326	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C327	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C328	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C329	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C330	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C331	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C332	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C333	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C334	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C335	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C336	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C337	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C338	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C339	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C340	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C341	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C342	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C343	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C344	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C345	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C346	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C347	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C348	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C349	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C350	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C351	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C352	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C353	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C354	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C355	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C356	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C357	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C358	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C359	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C360	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C361	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C362	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C363	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C364	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C365	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C366	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C367	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C368	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C369	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C370	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C371	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C372	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C373	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C374	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C375	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C376	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C377	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C378	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C379	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C380	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C381	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C382	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C383	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C384	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C385	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C386	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C387	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C388	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C389	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C390	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C391	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C392	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C393	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C394	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C395	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C396	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C397	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C398	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C399	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C400	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C401	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C402	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C403	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C404	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C405	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C406	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C407	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C408	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C409	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C410	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C411	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C412	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C413	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C414	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C415	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C416	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C417	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C418	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C419	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C420	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C421	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C422	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C423	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C424	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C425	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C426	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C427	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C428	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C429	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C430	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C431	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C432	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C433	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C434	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C435	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C436	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C437	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C438	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C439	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C440	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C441	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C442	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C443	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C444	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C445	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C446	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C447	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C448	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C449	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C450	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C451	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C452	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C453	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C454	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C455	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C456	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C457	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C458	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C459	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C460	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C461	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C462	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C463	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C464	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C465	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C466	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C467	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C468	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C469	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C470	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C471	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C472	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C473	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C474	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C475	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C476	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C477	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C478	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C479	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C480	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C481	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C482	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C483	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C484	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C485	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C486	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C487	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C488	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C489	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C490	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C491	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C492	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C493	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C494	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C495	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C496	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C497	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C498	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C499	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C500	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C501	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C502	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C503	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C504	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C505	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C506	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C507	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C508	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C509	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C510	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C511	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C512	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C513	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C514	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C515	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C516	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C517	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C518	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C519	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C520	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C521	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C522	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C523	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C524	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C525	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C526	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C527	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C528	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C529	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C530	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C531	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C532	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C533	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C534	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C535	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C536	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C537	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C538	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C539	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C540	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C541	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C542	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C543	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C544	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C545	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C546	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C547	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C548	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C549	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C550	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C551	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C552	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C553	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C554	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C555	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C556	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C557	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C558	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C559	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C560	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C561	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C562	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C563	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C564	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C565	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C566	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C567	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C568	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C569	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C570	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C571	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C572	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C573	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C574	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C575	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C576	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C577	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C578	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C579	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C580	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C581	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C582	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C583	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C584	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C585	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C586	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C587	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C588	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C589	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C590	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C591	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C592	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C593	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C594	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C595	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C596	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C597	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C598	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C599	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C600	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C601	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C602	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C603	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C604	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C605	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C606	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C607	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C608	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C609	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C610	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C611	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C612	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C613	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C614	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C615	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C616	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C617	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C618	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C619	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C620	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C621	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C622	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C623	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C624	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C625	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C626	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C627	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C628	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C629	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C630	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C631	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C632	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C633	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C634	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C635	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C636	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C637	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C638	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C639	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C640	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C641	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C642	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C643	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C644	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C645	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C646	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C647	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C648	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C649	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C650	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C651	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-764-615-11	s	CONNECTOR, BOARD TO BOARD 100P
CN2	1-764-615-11	s	CONNECTOR, BOARD TO BOARD 100P
CN3	1-764-615-11	s	CONNECTOR, BOARD TO BOARD 100P
D1	8-719-975-84	s	LED AY1101W
D2	8-719-975-84	s	LED AY1101W
IC1	8-759-466-56	s	IC 74LCX86MTCX
IC2	8-759-389-26	s	IC 74LCX08MTCX
IC3	8-759-389-48	s	IC 74LCX16374MTDX
IC4	8-759-466-59	s	IC CGS2535TVX
IC5	8-759-466-59	s	IC CGS2535TVX
IC6	8-759-466-58	s	IC CGS2534TVX
IC7	8-759-830-39	s	IC PI74FCT16374ETA
IC8	8-759-386-27	s	IC 74LCX04MTCX
IC9	8-759-464-48	s	IC CXD8900J
IC10	8-759-464-48	s	IC CXD8900J
IC11	8-759-386-27	s	IC 74LCX04MTCX
IC12	8-759-389-48	s	IC 74LCX16374MTDX
IC13	8-759-830-39	s	IC PI74FCT16374ETA
IC14	8-759-528-40	s	IC IDT74FCT163CTSO-TL
IC15	8-759-830-39	s	IC PI74FCT16374ETA
IC16	8-759-830-39	s	IC PI74FCT16374ETA
IC17	8-759-466-63	s	IC CXD8895Q
IC18	8-759-505-02	s	IC CXD8053Q
IC19	8-759-505-02	s	IC CXD8053Q
IC20	8-759-389-48	s	IC 74LCX16374MTDX
IC21	8-759-830-39	s	IC PI74FCT16374ETA
IC22	8-759-830-39	s	IC PI74FCT16374ETA
IC23	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC24	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC25	8-759-830-39	s	IC PI74FCT16374ETA
IC26	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC27	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC28	8-759-830-39	s	IC PI74FCT16374ETA
IC29	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC30	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC31	8-759-830-39	s	IC PI74FCT16374ETA
IC32	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC33	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC34	8-759-531-41	o	IC WS57C71-MOS MSB
IC35	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC36	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC37	8-759-389-48	s	IC 74LCX16374MTDX
IC38	8-759-389-48	s	IC 74LCX16374MTDX
IC39	8-759-531-43	o	IC WS57C51-SIN MSB
IC40	8-759-830-39	s	IC PI74FCT16374ETA
IC41	8-759-389-48	s	IC 74LCX16374MTDX
IC42	8-759-505-09	s	IC CXD8061
IC43	8-759-830-39	s	IC PI74FCT16374ETA
IC44	8-759-295-88	s	IC HM530281RTT-20
IC45	8-759-572-89	s	IC IDT74FCT162374ETPA-TL

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC46	8-759-505-02	s	IC CXD8053Q
IC47	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC48	8-759-505-02	s	IC CXD8053Q
IC49	8-759-389-48	s	IC 74LCX16374MTDX
IC50	8-759-464-48	s	IC CXD8900J
IC51	8-759-389-48	s	IC 74LCX16374MTDX
IC52	8-759-389-48	s	IC 74LCX16374MTDX
IC53	8-759-830-39	s	IC PI74FCT16374ETA
IC54	8-759-360-61	s	IC CXD8848AQ
IC55	8-759-505-08	s	IC CXD8060Q
IC56	8-759-505-08	s	IC CXD8060Q
IC57	8-759-360-61	s	IC CXD8848AQ
IC58	8-759-389-48	s	IC 74LCX16374MTDX
IC59	8-759-466-63	s	IC CXD8895Q
IC60	8-759-830-39	s	IC PI74FCT16374ETA
IC61	8-759-531-42	o	IC WS57C51-SIN LSB
IC62	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC63	8-759-389-48	s	IC 74LCX16374MTDX
IC64	8-759-389-48	s	IC 74LCX16374MTDX
IC65	8-759-389-48	s	IC 74LCX16374MTDX
IC66	8-759-531-45	o	IC WS57C71-ENH MSB
IC67	8-759-531-44	o	IC WS57C71-ENH LSB
IC68	8-759-295-88	s	IC HM530281RTT-20
IC69	8-759-456-26	s	IC 74LCX541MTCX
IC70	8-759-523-49	s	IC TC74ACT541FT(EL)
IC71	8-759-456-26	s	IC 74LCX541MTCX
IC72	8-759-466-63	s	IC CXD8895Q
IC73	8-759-386-26	s	IC 74LCX574MTCX
IC74	8-759-830-39	s	IC PI74FCT16374ETA
IC75	8-759-386-26	s	IC 74LCX574MTCX
IC76	8-759-456-26	s	IC 74LCX541MTCX
IC77	8-759-456-26	s	IC 74LCX541MTCX
IC78	8-759-830-39	s	IC PI74FCT16374ETA
IC79	8-759-531-43	o	IC WS57C51-SIN MSB
IC80	8-759-389-48	s	IC 74LCX16374MTDX
IC81	8-759-466-63	s	IC CXD8895Q
IC82	8-759-389-48	s	IC 74LCX16374MTDX
IC83	8-759-389-48	s	IC 74LCX16374MTDX
IC84	8-759-389-48	s	IC 74LCX16374MTDX
IC85	8-759-505-09	s	IC CXD8061
IC86	8-759-505-00	s	IC CXD8052Q
IC87	8-759-830-39	s	IC PI74FCT16374ETA
IC88	8-759-505-06	s	IC CXD8058Q
IC89	8-759-505-08	s	IC CXD8060Q
IC90	8-759-456-26	s	IC 74LCX541MTCX
IC91	8-759-523-49	s	IC TC74ACT541FT(EL)
IC92	8-759-505-08	s	IC CXD8060Q
IC93	8-759-360-61	s	IC CXD8848AQ
IC94	8-759-464-48	s	IC CXD8900J
IC95	8-759-360-61	s	IC CXD8848AQ
IC96	8-759-389-48	s	IC 74LCX16374MTDX
IC97	8-759-389-48	s	IC 74LCX16374MTDX
IC98	8-759-389-48	s	IC 74LCX16374MTDX
IC99	8-759-456-26	s	IC 74LCX541MTCX
IC100	8-759-456-26	s	IC 74LCX541MTCX
IC101	8-759-531-42	o	IC WS57C51-SIN LSB
IC102	8-759-389-48	s	IC 74LCX16374MTDX
IC103	8-759-531-45	o	IC WS57C71-ENH MSB
IC104	8-759-531-44	o	IC WS57C71-ENH LSB

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC105	8-759-389-30	s	IC 74LCX32MTCX
IC106	8-759-389-48	s	IC 74LCX16374MTDX
IC107	8-759-389-26	s	IC 74LCX08MTCX
IC108	8-759-466-59	s	IC CGS2535TVX
IC109	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC110	8-759-464-48	s	IC CXD8900J
IC111	8-759-464-48	s	IC CXD8900J
IC112	8-759-386-28	s	IC 74LCX00MTCX
IC113	8-759-389-48	s	IC 74LCX16374MTDX
IC114	8-759-830-39	s	IC PI74FCT16374ETA
IC115	8-759-830-39	s	IC PI74FCT16374ETA
IC116	8-759-830-39	s	IC PI74FCT16374ETA
IC117	8-759-505-02	s	IC CXD8053Q
IC118	8-759-505-02	s	IC CXD8053Q
IC119	8-759-505-02	s	IC CXD8053Q
IC120	8-759-389-48	s	IC 74LCX16374MTDX
IC121	8-759-830-39	s	IC PI74FCT16374ETA
IC122	8-759-830-39	s	IC PI74FCT16374ETA
IC123	8-759-830-39	s	IC PI74FCT16374ETA
IC124	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC125	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC126	8-759-389-26	s	IC 74LCX08MTCX
IC127	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC128	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC129	8-759-830-39	s	IC PI74FCT16374ETA
IC130	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC131	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC132	8-759-531-40	o	IC WS57C71-MOS LSB
IC133	8-759-830-39	s	IC PI74FCT16374ETA
IC134	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC135	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC136	8-759-830-39	s	IC PI74FCT16374ETA
IC137	8-759-830-39	s	IC PI74FCT16374ETA
IC138	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC139	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC140	8-759-386-27	s	IC 74LCX04MTCX
IC141	8-759-389-48	s	IC 74LCX16374MTDX
IC142	8-759-531-43	o	IC WS57C51-SIN MSB
IC143	8-759-389-48	s	IC 74LCX16374MTDX
IC144	8-759-295-88	s	IC HM530281RTT-20
IC145	8-759-389-48	s	IC 74LCX16374MTDX
IC146	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC147	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC148	8-759-531-45	o	IC WS57C71-ENH MSB
IC149	8-759-531-44	o	IC WS57C71-ENH LSB
IC150	8-759-386-26	s	IC 74LCX574MTCX
IC151	8-759-830-39	s	IC PI74FCT16374ETA
IC152	8-759-505-02	s	IC CXD8053Q
IC153	8-759-505-02	s	IC CXD8053Q
IC154	8-759-389-48	s	IC 74LCX16374MTDX
IC155	8-759-389-48	s	IC 74LCX16374MTDX
IC156	8-759-389-48	s	IC 74LCX16374MTDX
IC157	8-759-830-39	s	IC PI74FCT16374ETA
IC158	8-759-360-61	s	IC CXD8848AQ
IC159	8-759-505-08	s	IC CXD8060Q
IC160	8-759-505-08	s	IC CXD8060Q
IC161	8-759-360-61	s	IC CXD8848AQ
IC162	8-759-389-48	s	IC 74LCX16374MTDX
IC163	8-759-466-63	s	IC CXD8895Q

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC164	8-759-466-56	s	IC 74LCX86MTCX
IC165	8-759-830-39	s	IC PI74FCT16374ETA
IC166	8-759-531-42	o	IC WS57C51-SIN LSB
IC167	8-759-572-89	s	IC IDT74FCT162374ETPA-TL
IC168	8-759-389-48	s	IC 74LCX16374MTDX
IC169	8-759-505-09	s	IC CXD8061
IC170	8-759-295-88	s	IC HM530281RTT-20
IC171	8-759-389-48	s	IC 74LCX16374MTDX
IC172	8-759-389-48	s	IC 74LCX16374MTDX
IC173	8-759-456-26	s	IC 74LCX541MTCX
IC174	8-759-499-65	o	IC EPM7032-DUST-V1
IC175	8-759-523-49	s	IC TC74ACT541FT(EL)
IC176	8-759-523-49	s	IC TC74ACT541FT(EL)
IC177	8-759-389-48	s	IC 74LCX16374MTDX
IC178	8-759-831-99	s	IC IDT74FCT574CTPY-TL
IC179	8-759-466-56	s	IC 74LCX86MTCX
IC180	8-759-523-49	s	IC TC74ACT541FT(EL)
IC181	8-759-523-49	s	IC TC74ACT541FT(EL)
IC182	8-759-830-39	s	IC PI74FCT16374ETA
IC183	8-759-531-43	o	IC WS57C51-SIN MSB
IC184	8-759-389-48	s	IC 74LCX16374MTDX
IC185	8-759-389-48	s	IC 74LCX16374MTDX
IC186	8-759-505-00	s	IC CXD8052Q
IC187	8-759-389-48	s	IC 74LCX16374MTDX
IC188	8-759-466-63	s	IC CXD8895Q
IC189	8-759-389-48	s	IC 74LCX16374MTDX
IC190	8-759-531-44	o	IC WS57C71-ENH LSB
IC191	8-759-531-45	o	IC WS57C71-ENH MSB
IC192	8-759-466-56	s	IC 74LCX86MTCX
IC193	8-759-523-49	s	IC TC74ACT541FT(EL)
IC194	8-759-523-49	s	IC TC74ACT541FT(EL)
IC195	8-759-505-08	s	IC CXD8060Q
IC196	8-759-505-08	s	IC CXD8060Q
IC197	8-759-360-61	s	IC CXD8848AQ
IC198	8-759-360-61	s	IC CXD8848AQ
IC199	8-759-389-48	s	IC 74LCX16374MTDX
IC200	8-759-389-48	s	IC 74LCX16374MTDX
IC201	8-759-389-48	s	IC 74LCX16374MTDX
IC202	8-759-531-42	o	IC WS57C51-SIN LSB
IC203	8-759-469-98	s	IC CAT93C66K-LE10
IC204	8-759-271-82	s	IC DS3695ATM
IC205	8-759-523-49	s	IC TC74ACT541FT(EL)
IC206	8-759-456-26	s	IC 74LCX541MTCX
IC207	8-759-389-48	s	IC 74LCX16374MTDX
IC208	8-759-505-09	s	IC CXD8061
IC209	8-759-389-48	s	IC 74LCX16374MTDX
IC211	8-759-386-26	s	IC 74LCX574MTCX
IS174	1-251-047-11	s	SOCKET,IC
R1	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R2	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R3	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R4	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R5	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R6	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R7	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R8	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R12	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R14	1-216-295-91	s	CONDUCTOR, CHIP (2012)

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R15	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R16	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R18	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R20	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R21	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R24	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R25	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R27	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R28	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R29	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R30	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R31	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R32	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R35	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R36	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R37	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R38	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R39	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R41	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R42	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R44	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R45	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R46	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R47	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R50	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R51	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R52	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R53	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R56	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R58	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R59	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R61	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R62	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R64	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R66	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R68	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R70	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R71	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R73	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R76	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R77	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R79	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R80	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R84	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R85	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R86	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R88	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R89	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R92	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R93	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R96	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R97	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R98	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R99	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R100	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R102	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R103	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R104	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R108	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R109	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R111	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R112	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R113	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R114	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R115	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R117	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R118	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R119	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R120	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R121	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R122	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R124	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R126	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R127	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R129	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R131	1-216-651-11	s	RESISTOR,CHIP 1K 1/10W(2012)
R132	1-216-643-11	s	RESISTOR,CHIP 470 1/10W (2012)
R134	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R135	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R136	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R137	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R138	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R139	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R140	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R141	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R142	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R143	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R146	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R151	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R152	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R153	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R154	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R156	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R157	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R158	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R160	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R161	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R162	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R163	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R165	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R167	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R168	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R169	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R170	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R173	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R174	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R175	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R176	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R177	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R178	1-216-295-91	s	CONDUCTOR, CHIP (2012)
R179	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R181	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
R182	1-216-611-11	s	RESISTOR,CHIP 22 1/10W (2012)
RB1	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB2	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB3	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB4	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB5	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB6	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB7	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB8	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB9	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB10	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB11	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB12	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB13	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB14	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB15	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB16	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB17	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB18	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB19	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB20	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB21	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB22	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB23	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB24	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB25	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB26	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB27	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB28	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB29	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB30	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB31	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB32	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB33	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB34	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB35	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB36	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB37	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB38	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB39	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB40	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB41	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB42	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB43	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB44	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB45	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB46	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB47	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB48	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB49	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB50	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB51	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB52	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB53	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB54	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB55	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB56	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB57	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB58	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB59	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB60	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB61	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB62	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB63	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB64	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

(WKG-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB65	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB66	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB67	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB68	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB69	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB70	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB71	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB72	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB73	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB74	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB75	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB76	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB77	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB78	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB79	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB80	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB81	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB82	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB83	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB84	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB85	1-233-448-11	s	RESISTOR, CHIP NETWORK 22
RB86	1-233-448-11	s	RESISTOR, CHIP NETWORK 22

FRAME(HDS-7000)

Ref. No. or Q'ty	Part No.	SP	Description
12pcs	1-763-092-11	s	FAN, DC
6pcs	1-698-873-11	s	FAN, DC
			HN101: Not supplied. Replace by components.
			(TO CN8/CN-1701 BOARD on the top)
4pcs	1-562-210-11	o	CONTACT, FEMALE AWG18-22
1pc	1-562-285-11	o	HOUSING 4P
			(TO CN203/MB-494 BOARD)
4pcs	1-562-210-11	o	CONTACT, FEMALE AWG18-22
1pc	1-562-285-11	o	HOUSING 4P
			HN102: Not supplied. Replace by components.
			(TO CN8/CN-1701 BOARD on the bottom)
4pcs	1-562-210-11	o	CONTACT, FEMALE AWG18-22
1pc	1-562-285-11	o	HOUSING 4P
			(TO CN204/MB-494 BOARD)
4pcs	1-562-210-11	o	CONTACT, FEMALE AWG18-22
1pc	1-562-285-11	o	HOUSING 4P
			HN103: Not supplied. Replace by components.
			(TO CN4/CN-1539 BOARD on the top and left)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			(TO CN9/CN-1701 BOARD on the top)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			HN104: Not supplied. Replace by components.
			(TO CN4/CN-1539 BOARD on the bottom and left)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			(TO CN9/CN-1701 BOARD on the bottom)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			HN105: Not supplied. Replace by components.
			(TO CN4/CN-1539 BOARD on the top and center)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			(TO CN10/CN-1701 BOARD on the top)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			HN106: Not supplied. Replace by components.
			(TO CN4/CN-1539 BOARD on the bottom and center)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			(TO CN10/CN-1701 BOARD on the bottom)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			HN107: Not supplied. Replace by components.
			(TO CN4/CN-1539 BOARD on the top and right)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			(TO CN11/CN-1701 BOARD on the top)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			HN108: Not supplied. Replace by components.
			(TO CN4/CN-1539 BOARD on the bottom and right)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
			(TO CN11/CN-1701 BOARD on the bottom)
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P

(FRAME(HDS-7000))

Ref. No. or Q'ty	Part No.	SP	Description
HN109: Not supplied. Replace by components.			
(TO CN1/CN-1700 BOARD on the top)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
(TO CN201/MB-494 BOARD)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
HN110: Not supplied. Replace by components.			
(TO CN1/CN-1700 BOARD on the bottom)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
(TO CN202/MB-494 BOARD)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
HN111: Not supplied. Replace by components.			
(TO CN4/CN-1539 BOARD on the top of front fan)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
(TO CN2/CN-1700 BOARD on the top)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
HN112: Not supplied. Replace by components.			
(TO CN4/CN-1539 BOARD on the bottom of front fan)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
(TO CN2/CN-1700 BOARD on the bottom)			
4pcs	1-560-372-00	o	CONTACT, FEMALE AWG22-28
1pc	1-561-516-00	o	HOUSING, ILG 4P
HN113	1-959-321-11	o	HARNESS (SHORT)
(TO CN5/CN-1539 BOARD on the top of front fan)			
HN114	1-959-321-11	o	HARNESS (SHORT)
(TO CN5/CN-1539 BOARD on the top of front fan)			
HN115	1-959-321-11	o	HARNESS (SHORT)
(TO CN5/CN-1539 BOARD on the top of front fan)			
HN116	1-959-321-11	o	HARNESS (SHORT)
(TO CN7/CN-1539 BOARD on the bottom of front fan)			
HN117	1-959-321-11	o	HARNESS (SHORT)
(TO CN7/CN-1539 BOARD on the bottom of front fan)			
HN118	1-959-321-11	o	HARNESS (SHORT)
(TO CN7/CN-1539 BOARD on the bottom of front fan)			
HN119	1-783-388-11	o	CABLE ASSY, COAXIAL(1ME1, 2ME1)
HN120	1-783-389-11	o	CABLE ASSY, COAXIAL(1ME2, 2ME2)
HN121	1-783-390-11	o	CABLE ASSY, COAXIAL(PGM1, PGM2)
HN122	1-783-391-11	o	CABLE ASSY, COAXIAL(PGM3)
HN123	1-783-392-11	o	CABLE ASSY, COAXIAL(AX1, AX2)
HN124	1-783-393-11	o	CABLE ASSY, COAXIAL(AX3, AX4)
HN125	1-783-394-11	o	CABLE ASSY, COAXIAL(AX5)
HN126	1-783-395-11	o	CABLE ASSY, COAXIAL(AX6, AX7)
HN127	1-783-396-11	o	CABLE ASSY, COAXIAL(AX8, AX9)
HN128	1-783-397-11	o	CABLE ASSY, COAXIAL(AX10)
HN129	1-783-398-11	o	CABLE ASSY, COAXIAL(I1, I2)
HN130	1-783-399-11	o	CABLE ASSY, COAXIAL(I3, I4)
HN131	1-783-400-11	o	CABLE ASSY, COAXIAL(I5, I6)
HN132	1-783-401-11	o	CABLE ASSY, COAXIAL(I7, I8)
HN133	1-783-402-11	o	CABLE ASSY, COAXIAL(I9, I10)
HN134	1-783-403-11	o	CABLE ASSY, COAXIAL(I11, I12)
HN135	1-783-404-11	o	CABLE ASSY, COAXIAL(I13, I14)
HN136	1-783-405-11	o	CABLE ASSY, COAXIAL(I15, I16)
HN137	1-783-406-11	o	CABLE ASSY, COAXIAL(I17, I18)
HN138	1-783-407-11	o	CABLE ASSY, COAXIAL(I19, I20)
HN139	1-783-408-11	o	CABLE ASSY, COAXIAL(I21, I22)

(FRAME(HDS-7000))

Ref. No. or Q'ty	Part No.	SP	Description
HN140	1-783-409-11	o	CABLE ASSY, COAXIAL(I23, I24)
HN141	1-783-410-11	o	CABLE ASSY, COAXIAL(I25, I26)
HN142	1-783-411-11	o	CABLE ASSY, COAXIAL(I27, I28)
HN143	1-783-412-11	o	CABLE ASSY, COAXIAL(I29, I30)
HN144	1-783-413-11	o	CABLE ASSY, COAXIAL(PVW)
HN145	1-783-414-11	o	CABLE ASSY, COAXIAL(CLN)

FRAME(HKDS-7690A)

Ref. No. or Q'ty	Part No.	SP	Description
HN001	9-885-019-88	s	HARNESS (YF120101)
(TO CN209/RE-196 BOARD)			
(TO CN210/RE-196 BOARD)			
(TO CN211/RE-196 BOARD)			
(TO CN212/RE-196 BOARD)			
(TO CN216/RE-196 BOARD)			
(TO CN3/REAR PANEL)			
HN002	9-885-019-89	s	HARNESS (YF120102)
(TO CN213/RE-196 BOARD)			
(TO CN214/RE-196 BOARD)			
(TO CN215/RE-196 BOARD)			
(TO CN217/RE-196 BOARD)			
(TO CN4/REAR PANEL)			

PACKING MATERIALS(HDS-7000)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-695-542-11	o	TERMINATOR


OPTIONAL FIXTURES(HDS-7000)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8320-622-A	o	EXTENSION BOARD, EX-638
1pc	A-8320-623-A	o	EXTENSION BOARD, EX-700

Section 4
Location of Mounted Circuit Boards


4-1. HDS-7000

1. Except Plug-in Boards

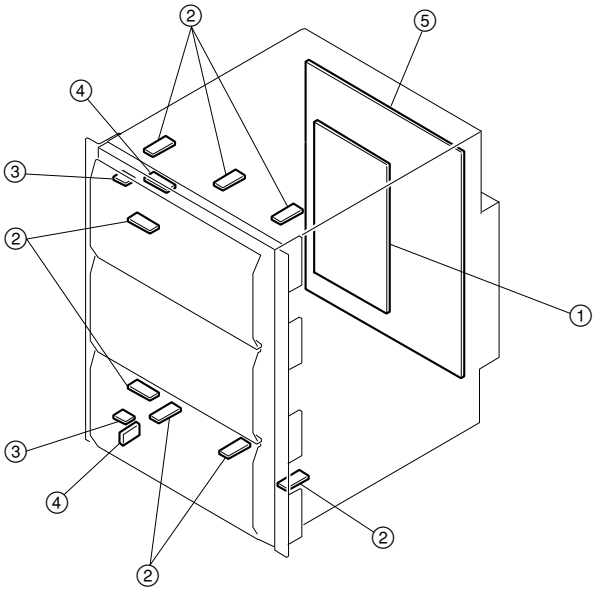


No	Board name	Circuit function	Model name
1	CN-1439	Connector board	HDS-7000
2	CN-1539	Connector board	
3	CN-1700	Connector board	
4	CN-1701	Connector board	
5	MB-494	Mother board	

2. Plug-in Boards

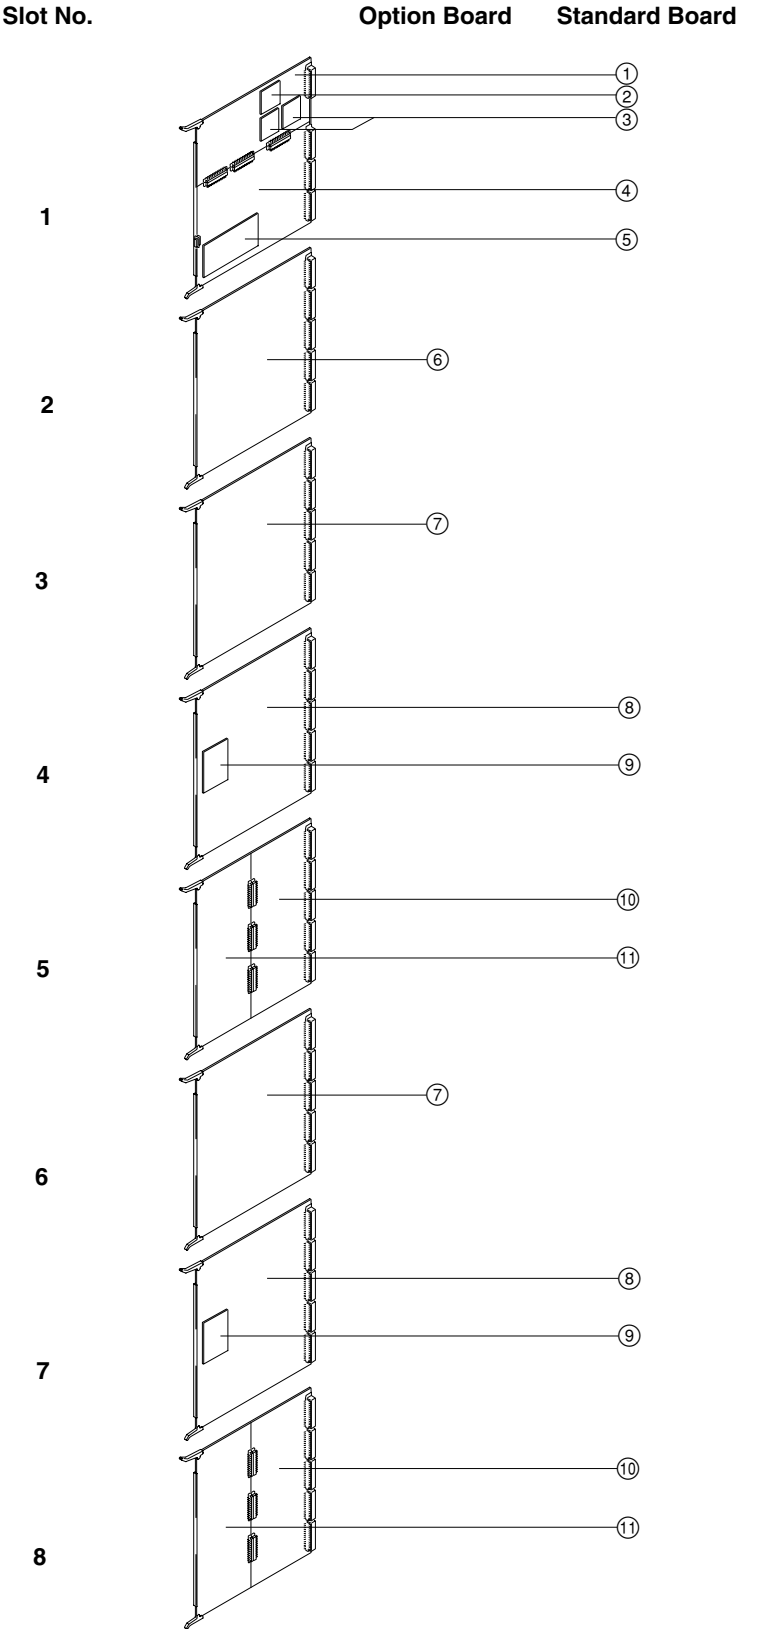


No	Board name	Circuit function	Model name
1	CPU-183	CPU board	HDS-7000
2	MEM-92	Memory board	
3	MEM-87	Memory board	
4	CKG-10/CKG-29	Clock generator board	
5	IF-656	RS-422A IF board	
6	MY-65	Frame memory board	HKDS-7041
7	CRK-9	Chromakey board	HKDS-7031
8	MIX-13	Mixer board	HDS-7000
9	WKG-26	Wipe generator board	
10	KPC-3/KPC-15	Key processor board	
11	WKG-25/WKG-29	Wipe generator board	

Slot No.	Option Board	Standard Board
9		⑦
10		⑧ ⑨
11		⑩ ⑪
12		⑫ ⑨
13		⑬ ⑨
14		⑭ ⑮
15		⑭ ⑮
16		⑯ ⑰

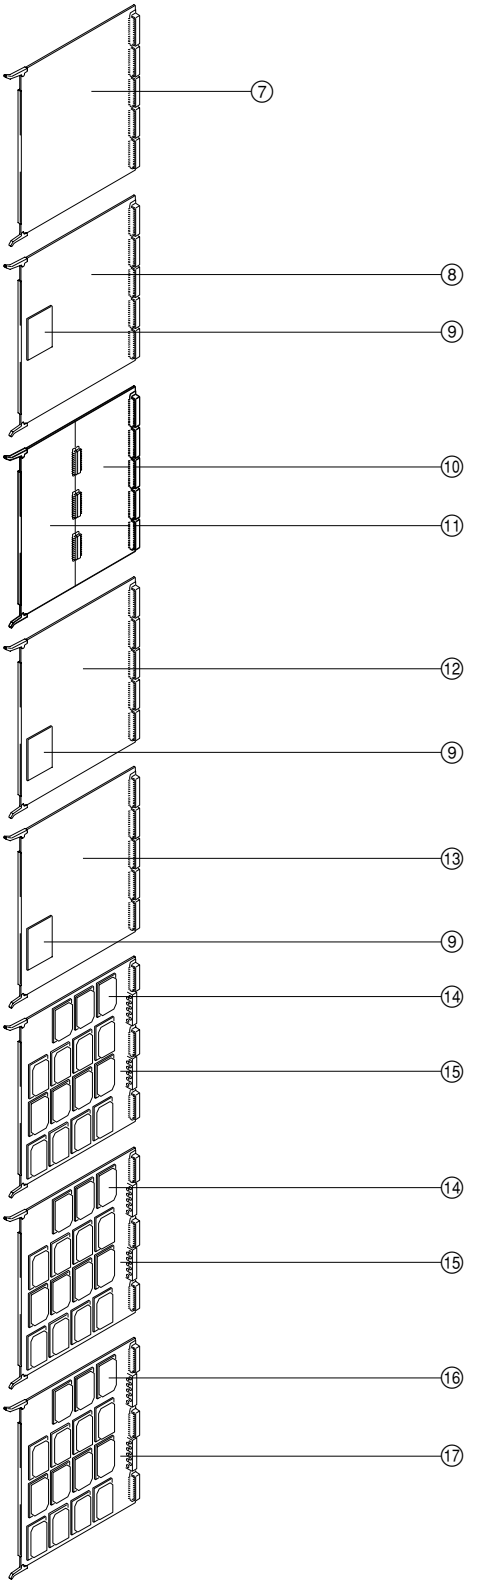

No	Board name	Circuit function	Model name
7	CRK-9	Chromakey board	HKDS-7031
8	MIX-13	Mixer board	HDS-7000
9	WKG-26	Wipe generator board	
10	KPC-3/KPC-15	Key processor board	
11	WKG-25/WKG-29	Wipe generator board	
12	VSW-33	Crosspoint board (Luminance)	
13	VSW-33	Crosspoint board (Chrominance)	
14	RX-35	HD SDI input module	
15	DI-21/DI-37	Input board (IN16 to IN30)	
16	TX-52	HD SDI output module	
17	OUT-7/OUT-20	Output board	

4-2. HKDS-7690A

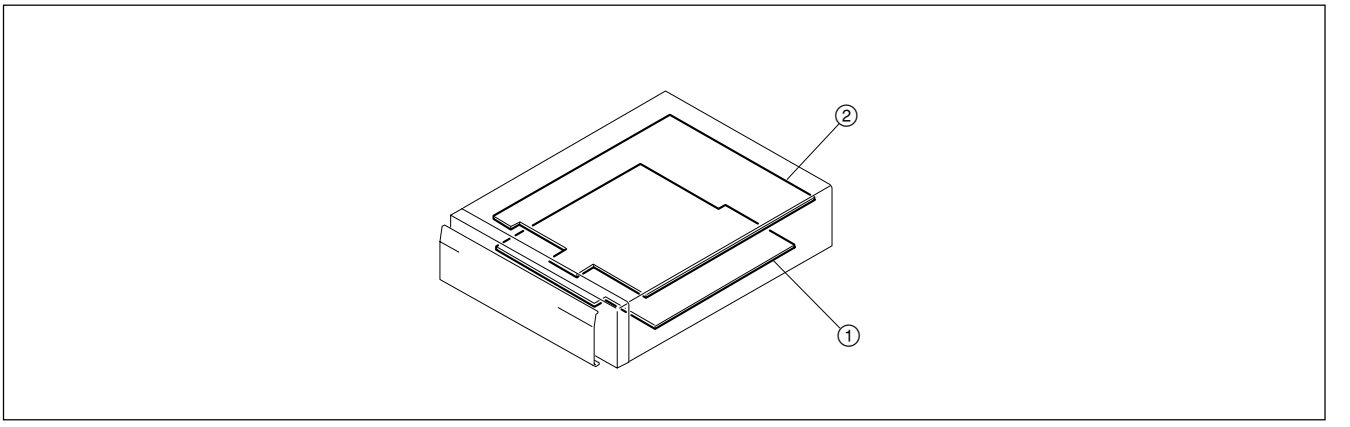

No	Board name	Circuit function	Model name
1	RE-194	AC-DC converter board	HKDS-7690A
2	RE-196	DC-DC converter board	

Section 5
Block Diagrams

5-1. Overall Block Diagrams

No.	Model	Description	Page
5-1-1.	HDS-7000	–	5-2
5-1-2.	BKDS-7011/7012	–	5-3
5-1-3.	BKDS-7025/7026	–	5-6
5-1-4.	HKDS-7690A	(Frame Wiring)	5-9

5-2. PC Board Block Diagrams/HDS-7000

No.	Board Designation	Description	Page
5-2-1.	CKG-10, IF-656	Clock Generator Board, RS-422A IF Board	5-10
5-2-2.	CKG-29, IF-656 (For 24P System)	Clock Generator Board, RS-422A IF Board	5-11
5-2-3.	CPU-183	CPU Board	5-12
5-2-4.	DI-21/DI-37	Input Board	5-14
5-2-5.	KPC-3/KPC-15	Key Processor Board	5-16
5-2-6.	MEM-87	Memory Board	5-17
5-2-7.	MEM-92	Memory Board	5-18
5-2-8.	MIX-13	Mixer Board	5-19
5-2-9.	OUT-7/OUT-20	Output Board	5-24
5-2-10.	DU-79, OUT-20 (For 24P System)	Clock Generator Board, Output Board	5-27
5-2-11.	VSW-33	Crosspoint Board	5-30
5-2-12.	WKG-25/WKG-29	Wipe Generator Board	5-32
5-2-13.	WKG-26	Wipe Generator Board	5-33

5-3. PC Board Block Diagrams/HKDS-7690A

No.	Board Designation	Description	Page
5-3-1.	RE-194	AC-DC Converter	5-34
5-3-2.	RE-196	DC-DC Converter	5-34

5-4. PC Board Block Diagram/HKDS-7031

No.	Board Designation	Description	Page
5-4-1.	CRK-9	Chromakey Board	5-35


5-5. PC Board Block Diagram/HKDS-7041

No.	Board Designation	Description	Page
5-5-1.	MY-65	Frame Memory Board	5-36

5-1. Overall Block Diagrams


5-1-1. HDS-7000

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

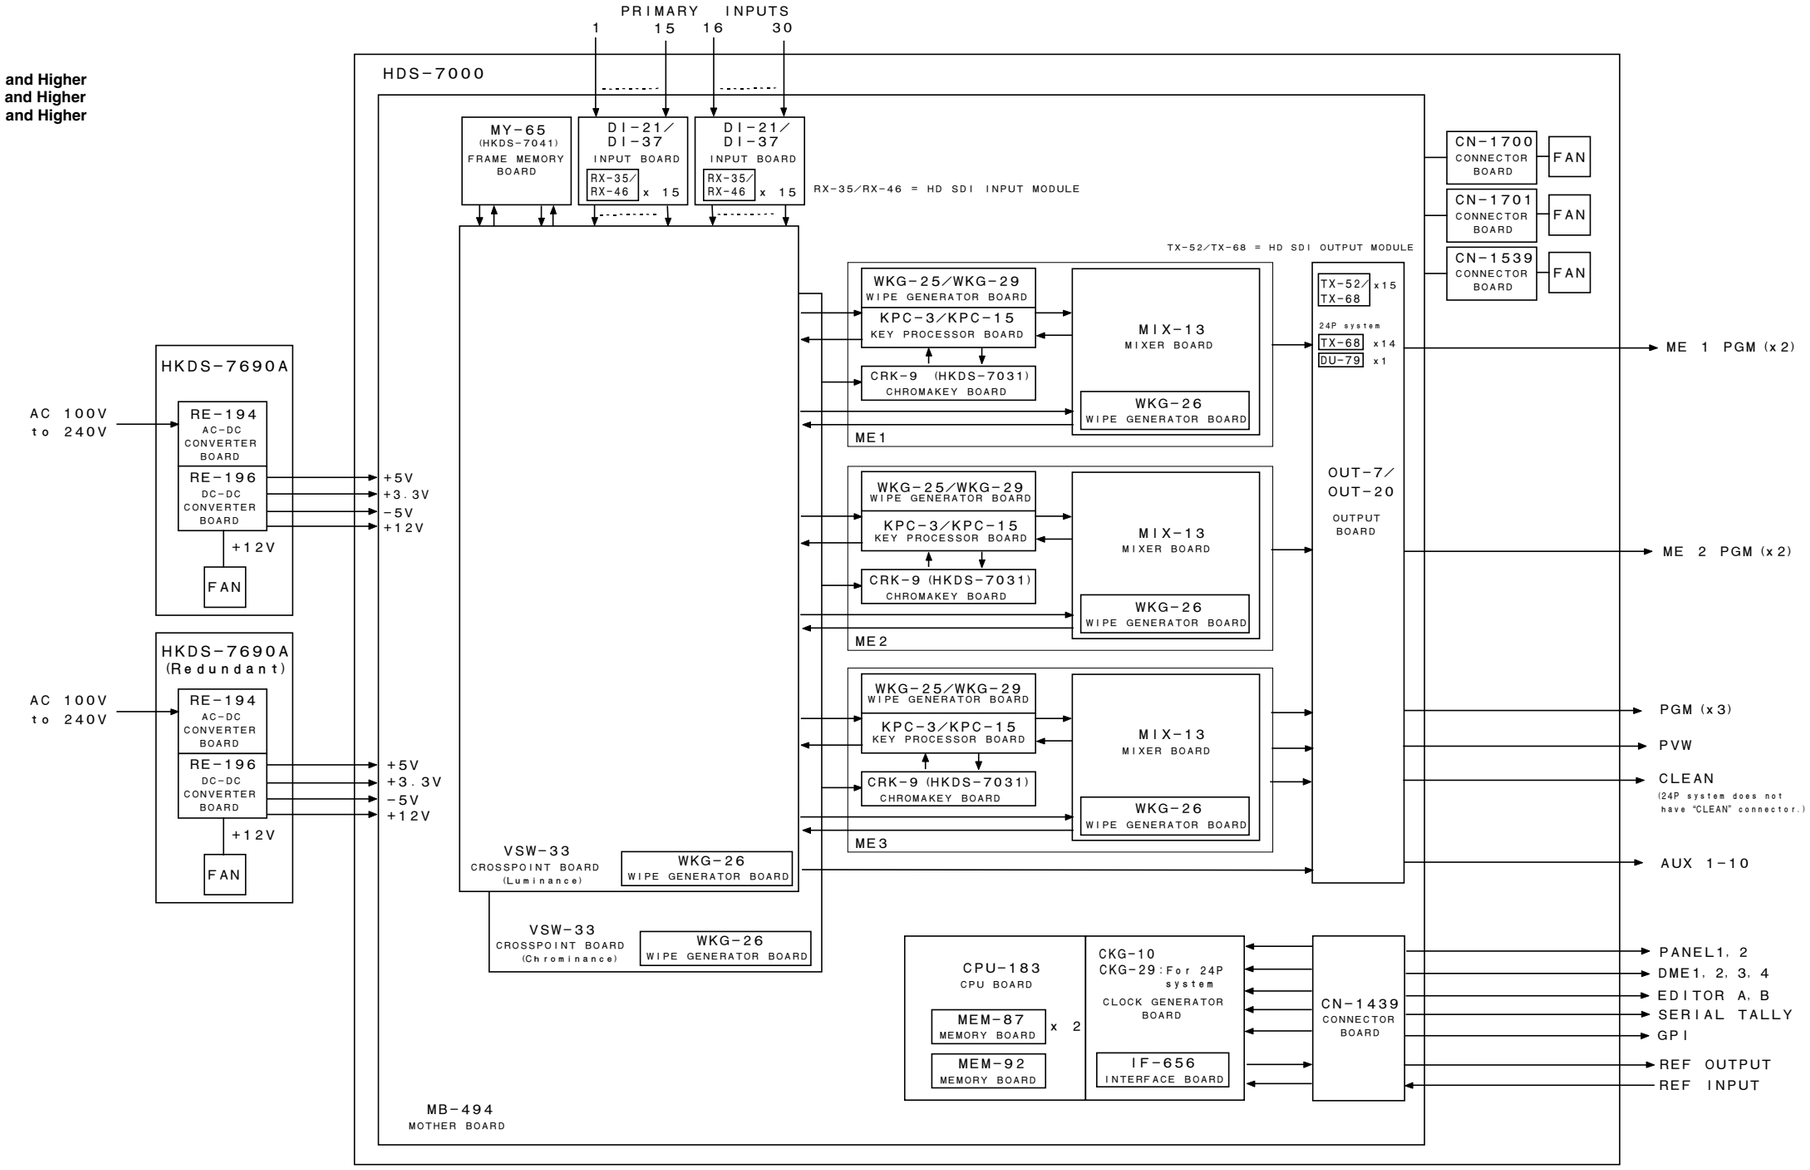

5-1-2. BKDS-7011/7012

BKDS-7011 (SY) : S/N 10001 and Higher
BKDS-7012 (SY) : S/N 10001 and Higher

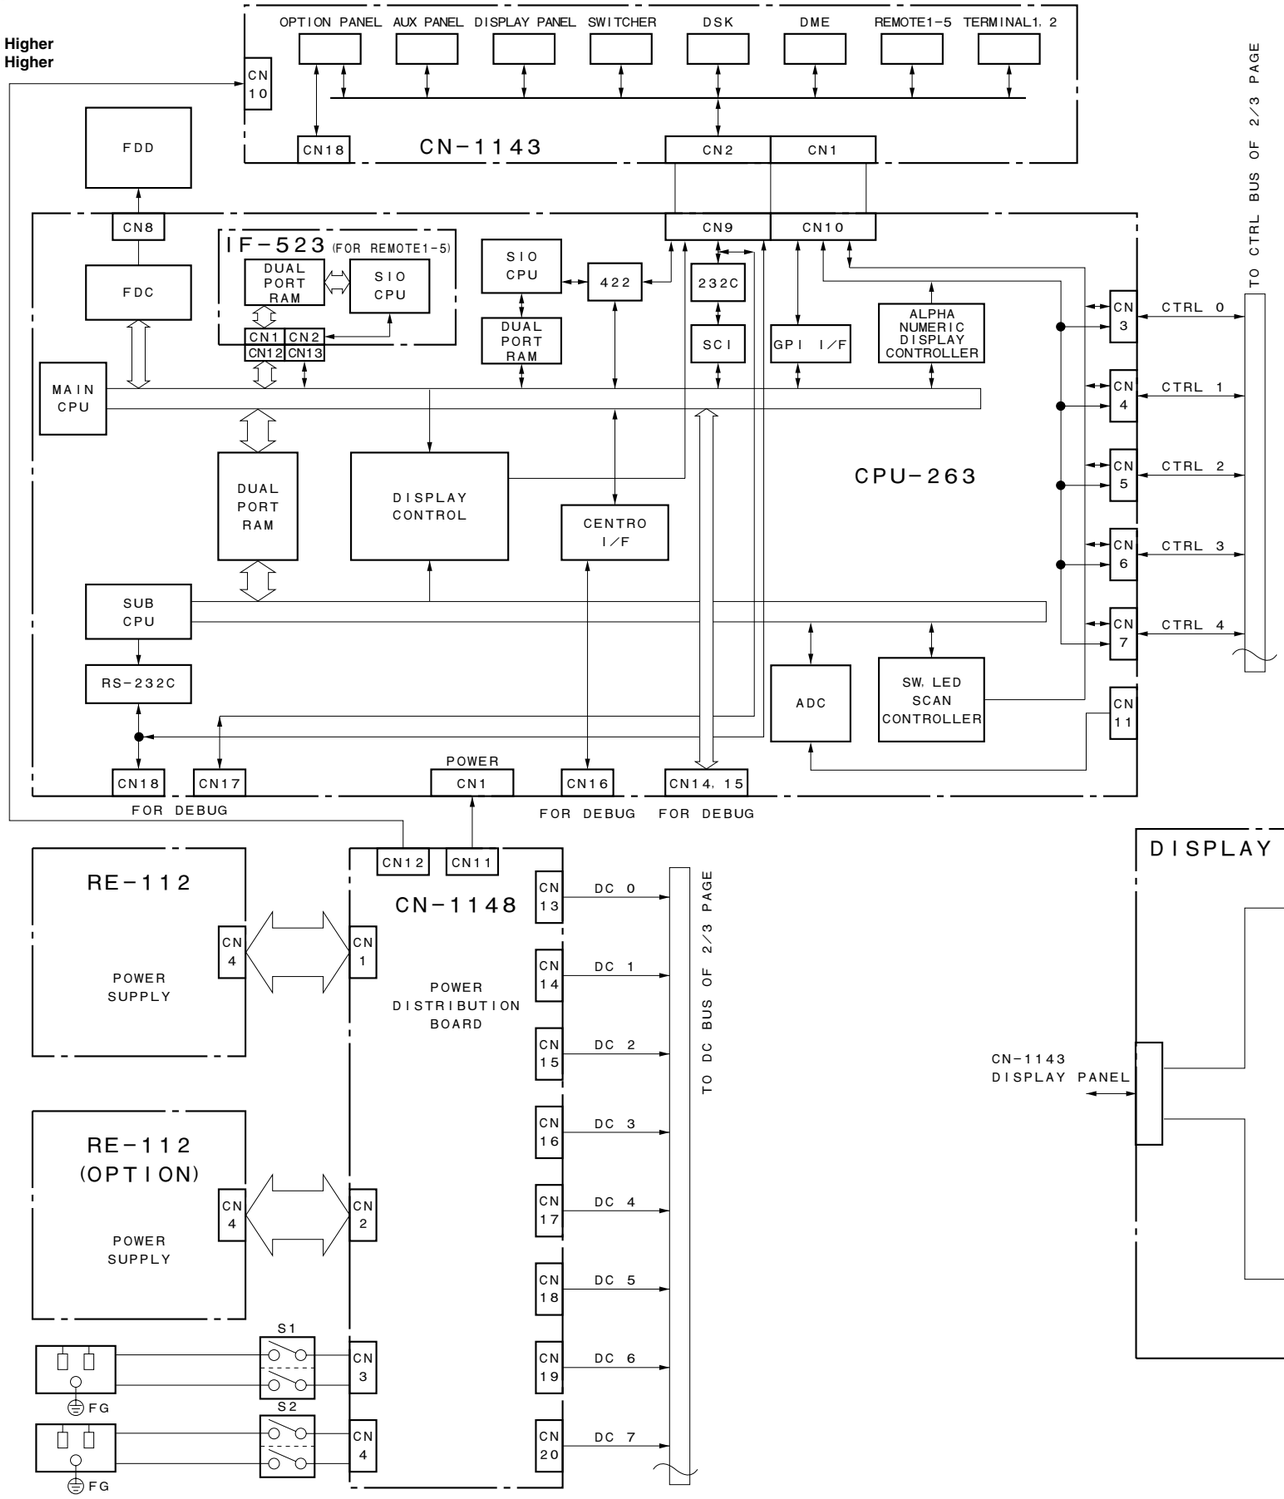

Overall (1/3)
BKDS-7011/7012


BKDS-7011 (SY) : S/N 10001 and Higher
BKDS-7012 (SY) : S/N 10001 and Higher



Overall (2/3)

BKDS-7011/7012


BKDS-7011 (SY) : S/N 10001 and Higher
BKDS-7012 (SY) : S/N 10001 and Higher

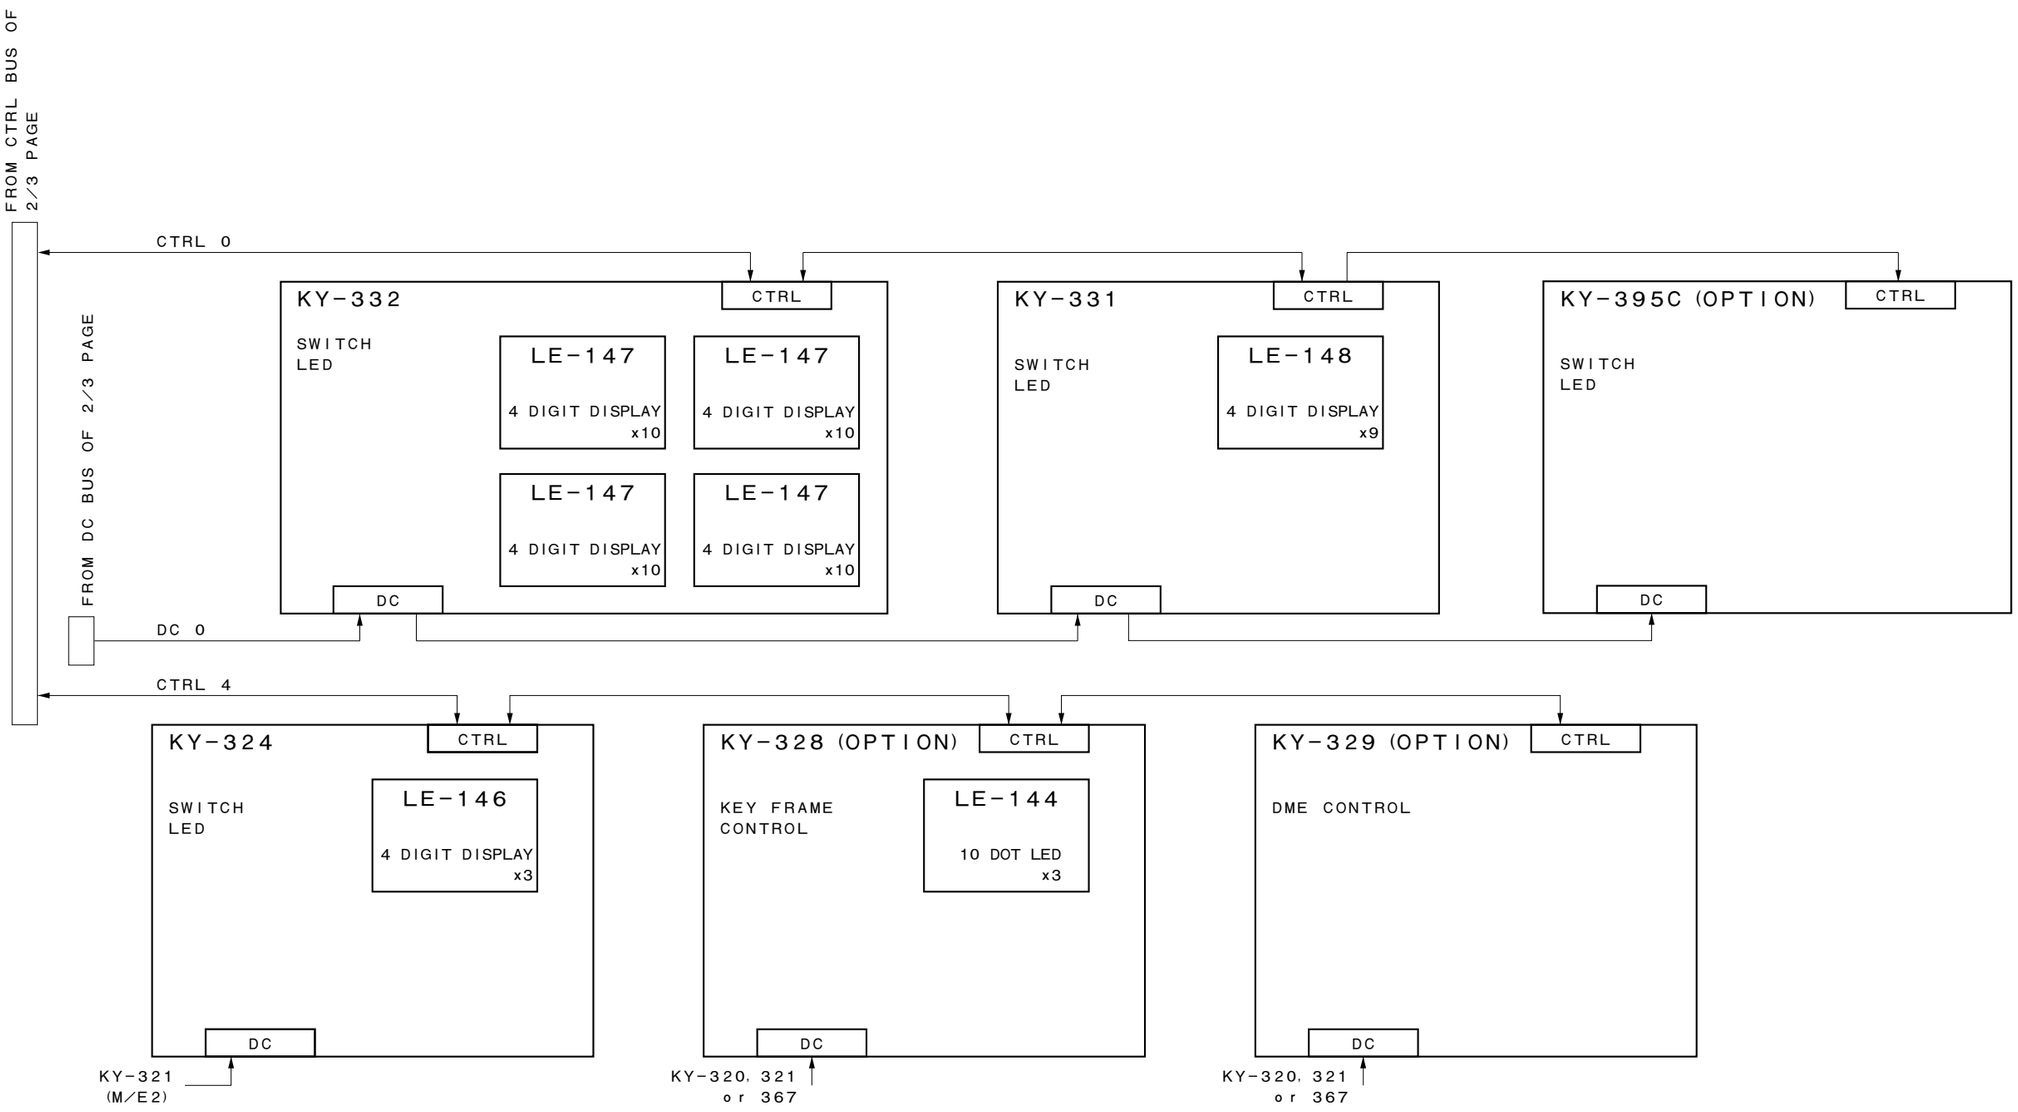

Overall (3/3)
BKDS-7011/7012


5-1-3. BKDS-7025/7026

BKDS-7025 (SY) : S/N 10001 and Higher
BKDS-7026 (J) : S/N 10001 and Higher

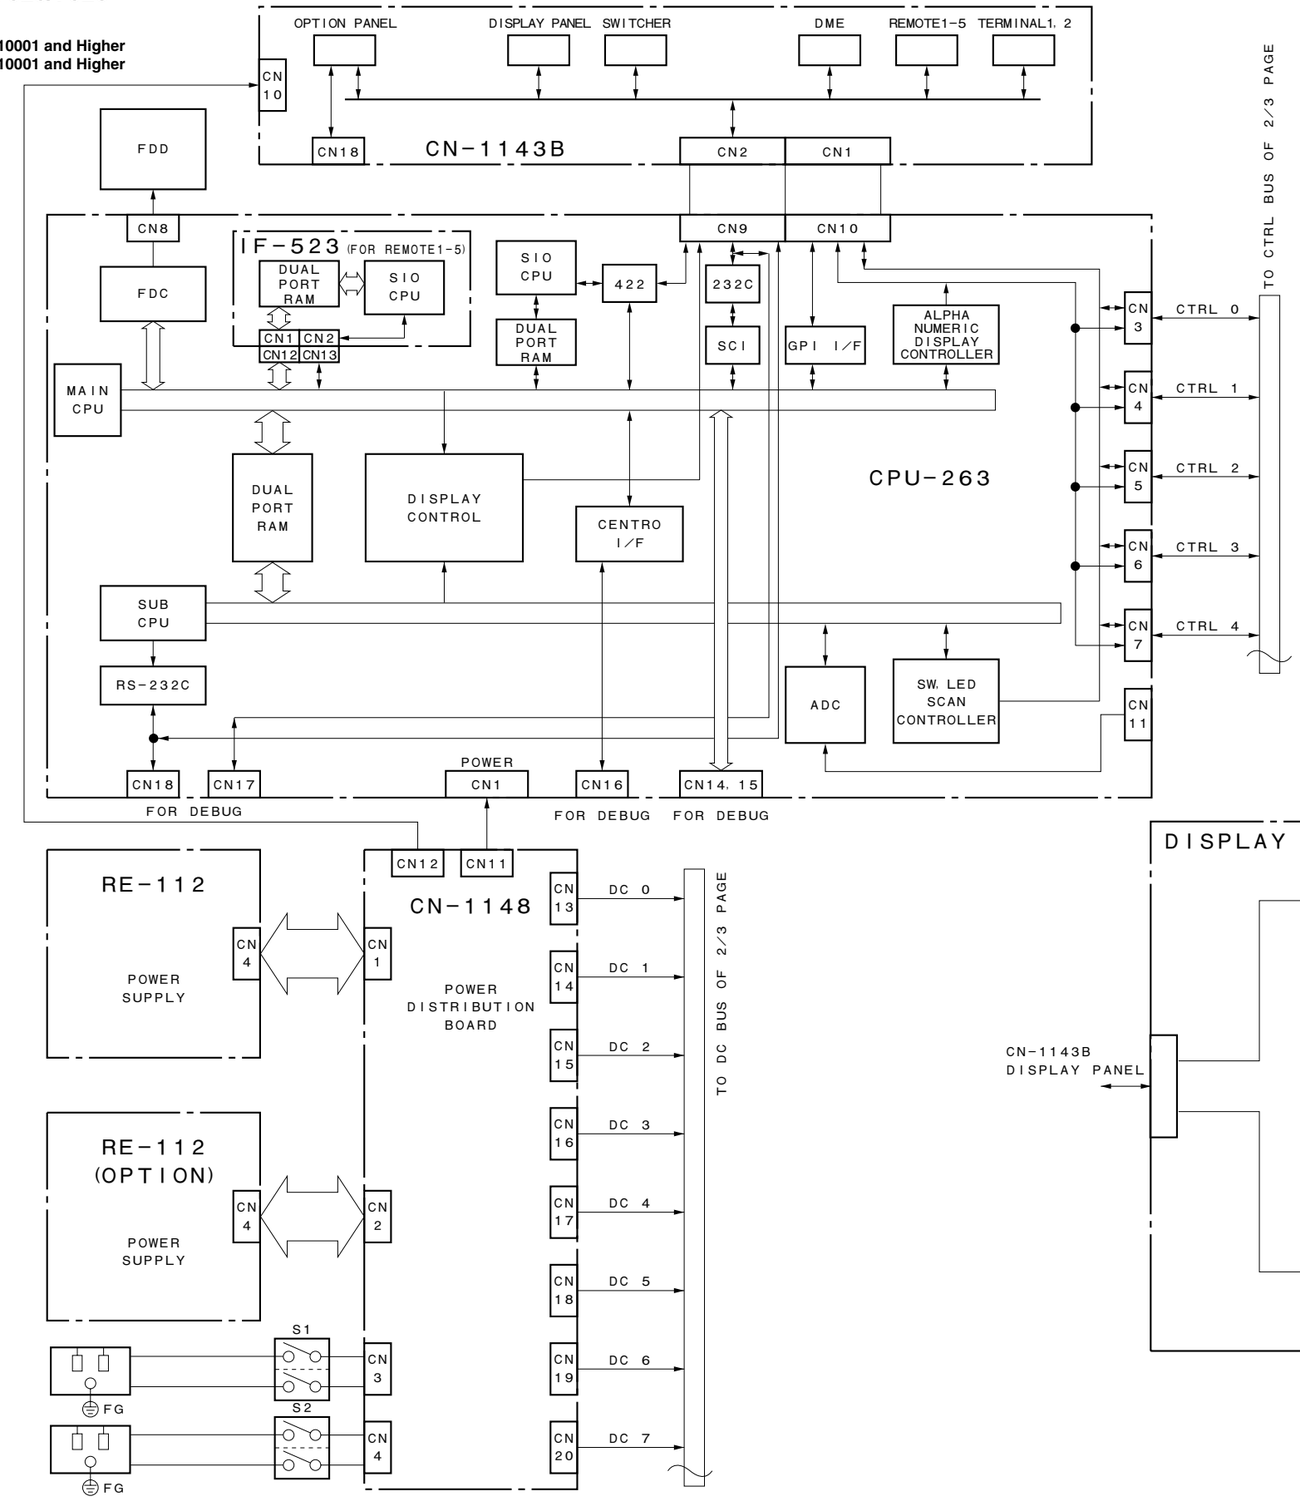


Overall (1/3)
BKDS-7025/7026

BKDS-7025 (SY) : S/N 10001 and Higher
BKDS-7026 (J) : S/N 10001 and Higher

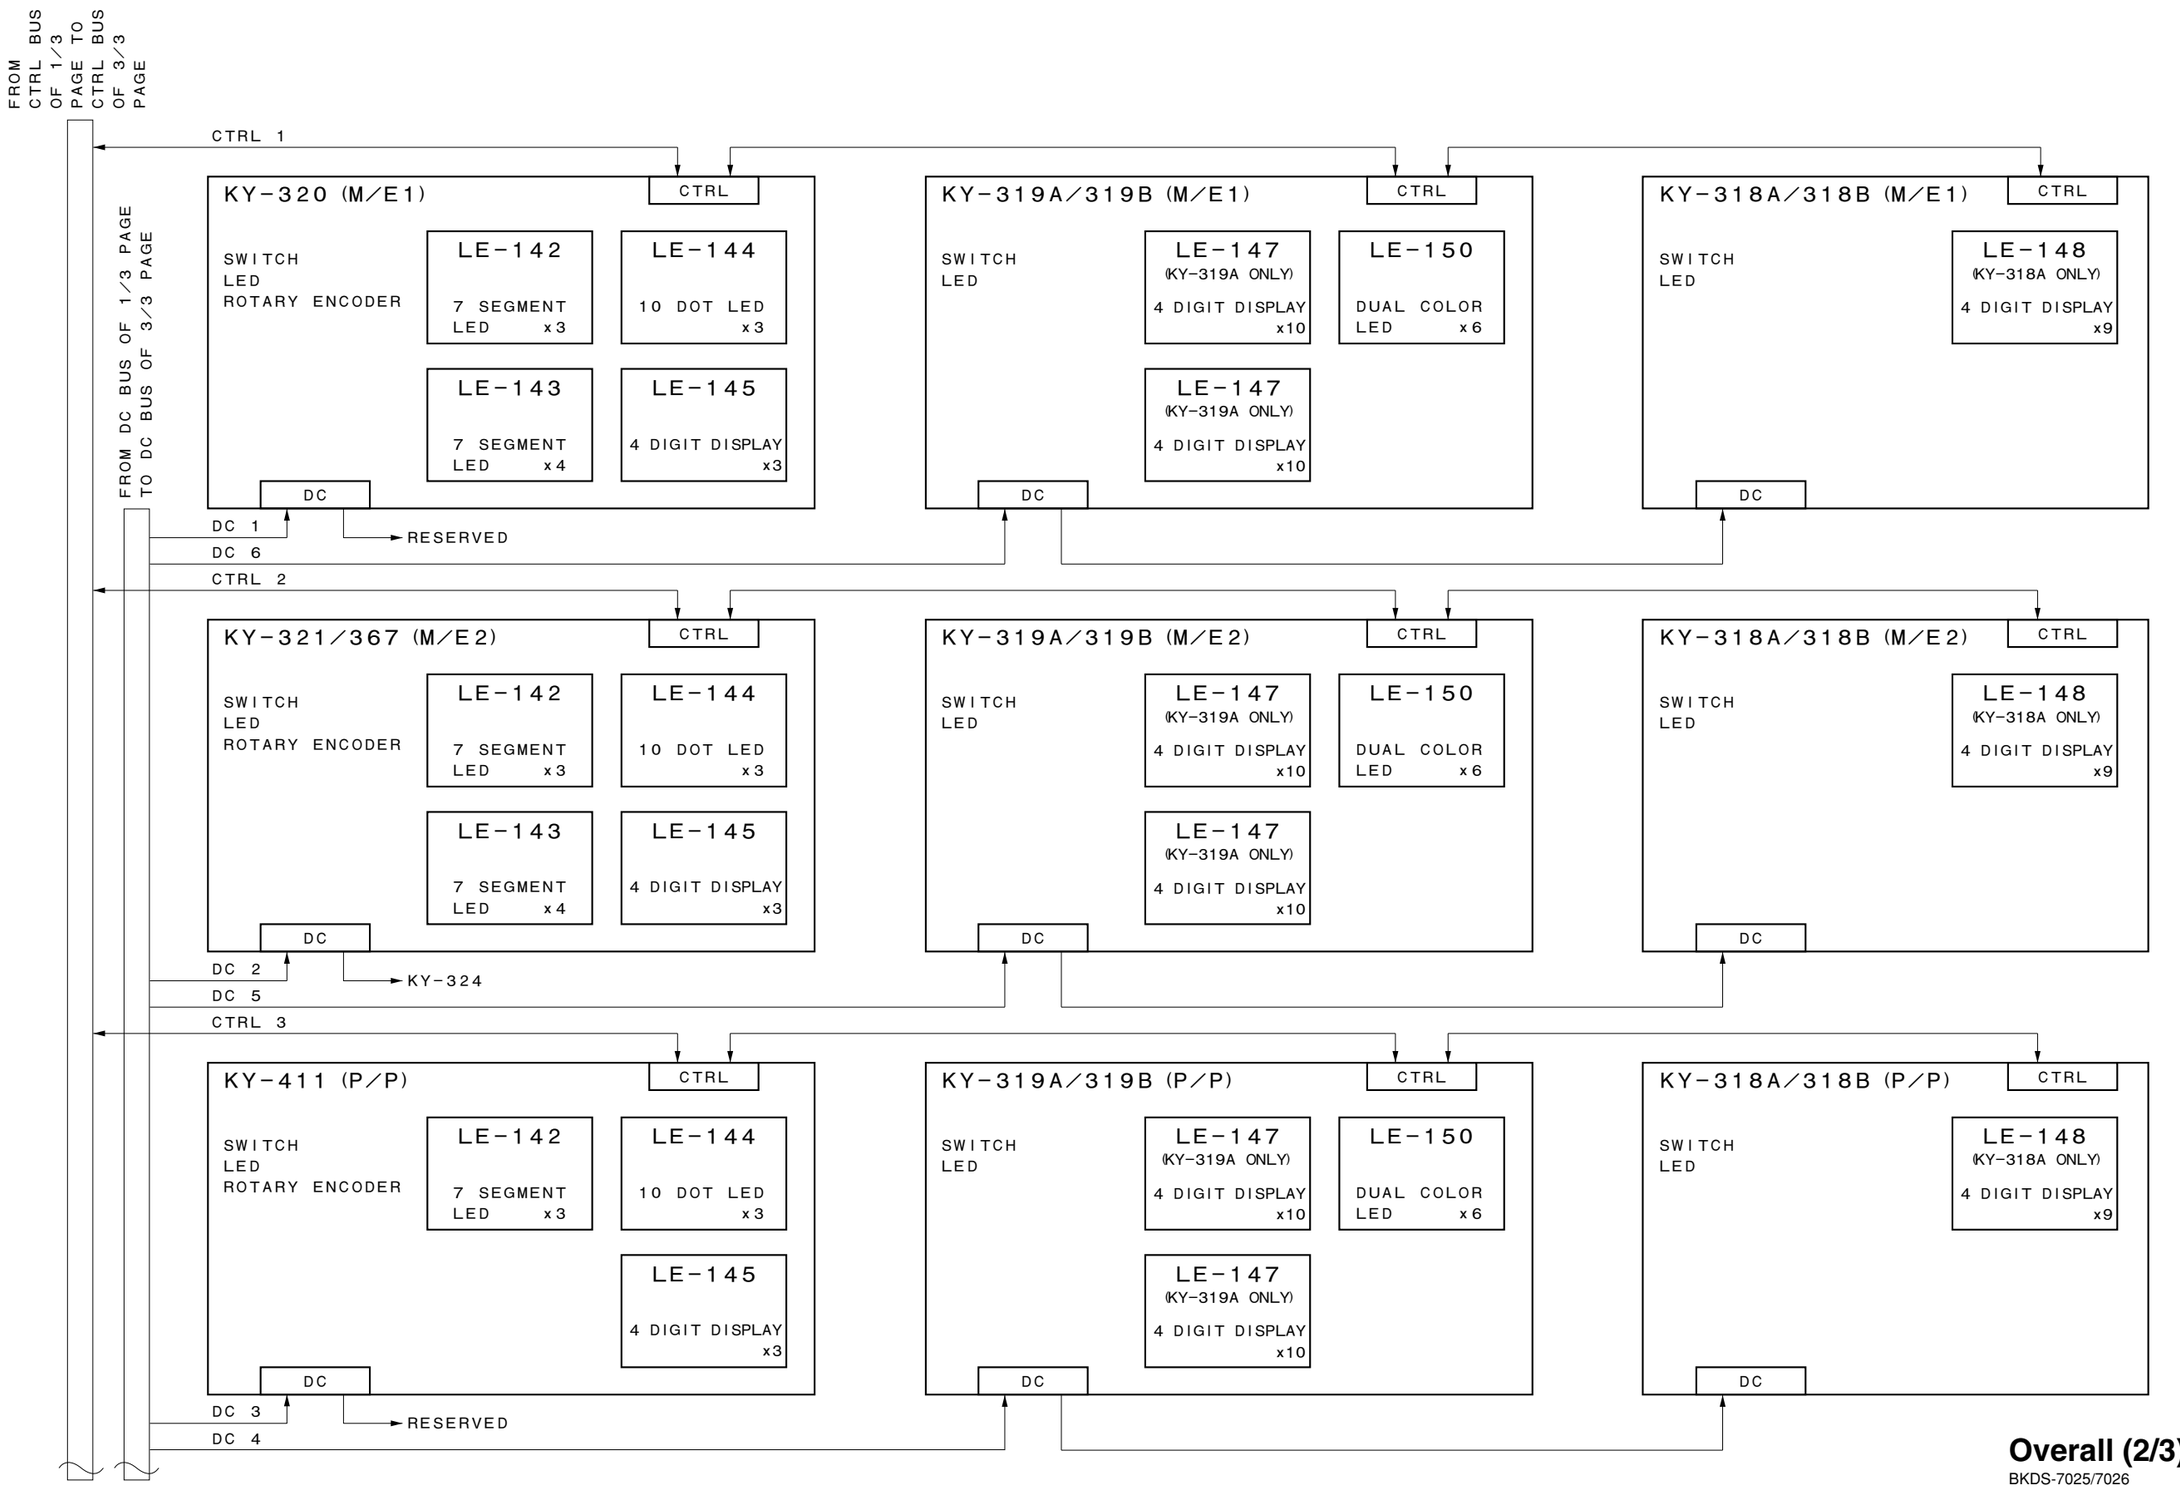

Overall (2/3)
BKDS-7025/7026


BKDS-7025 (SY) : S/N 10001 and Higher
BKDS-7026 (J) : S/N 10001 and Higher

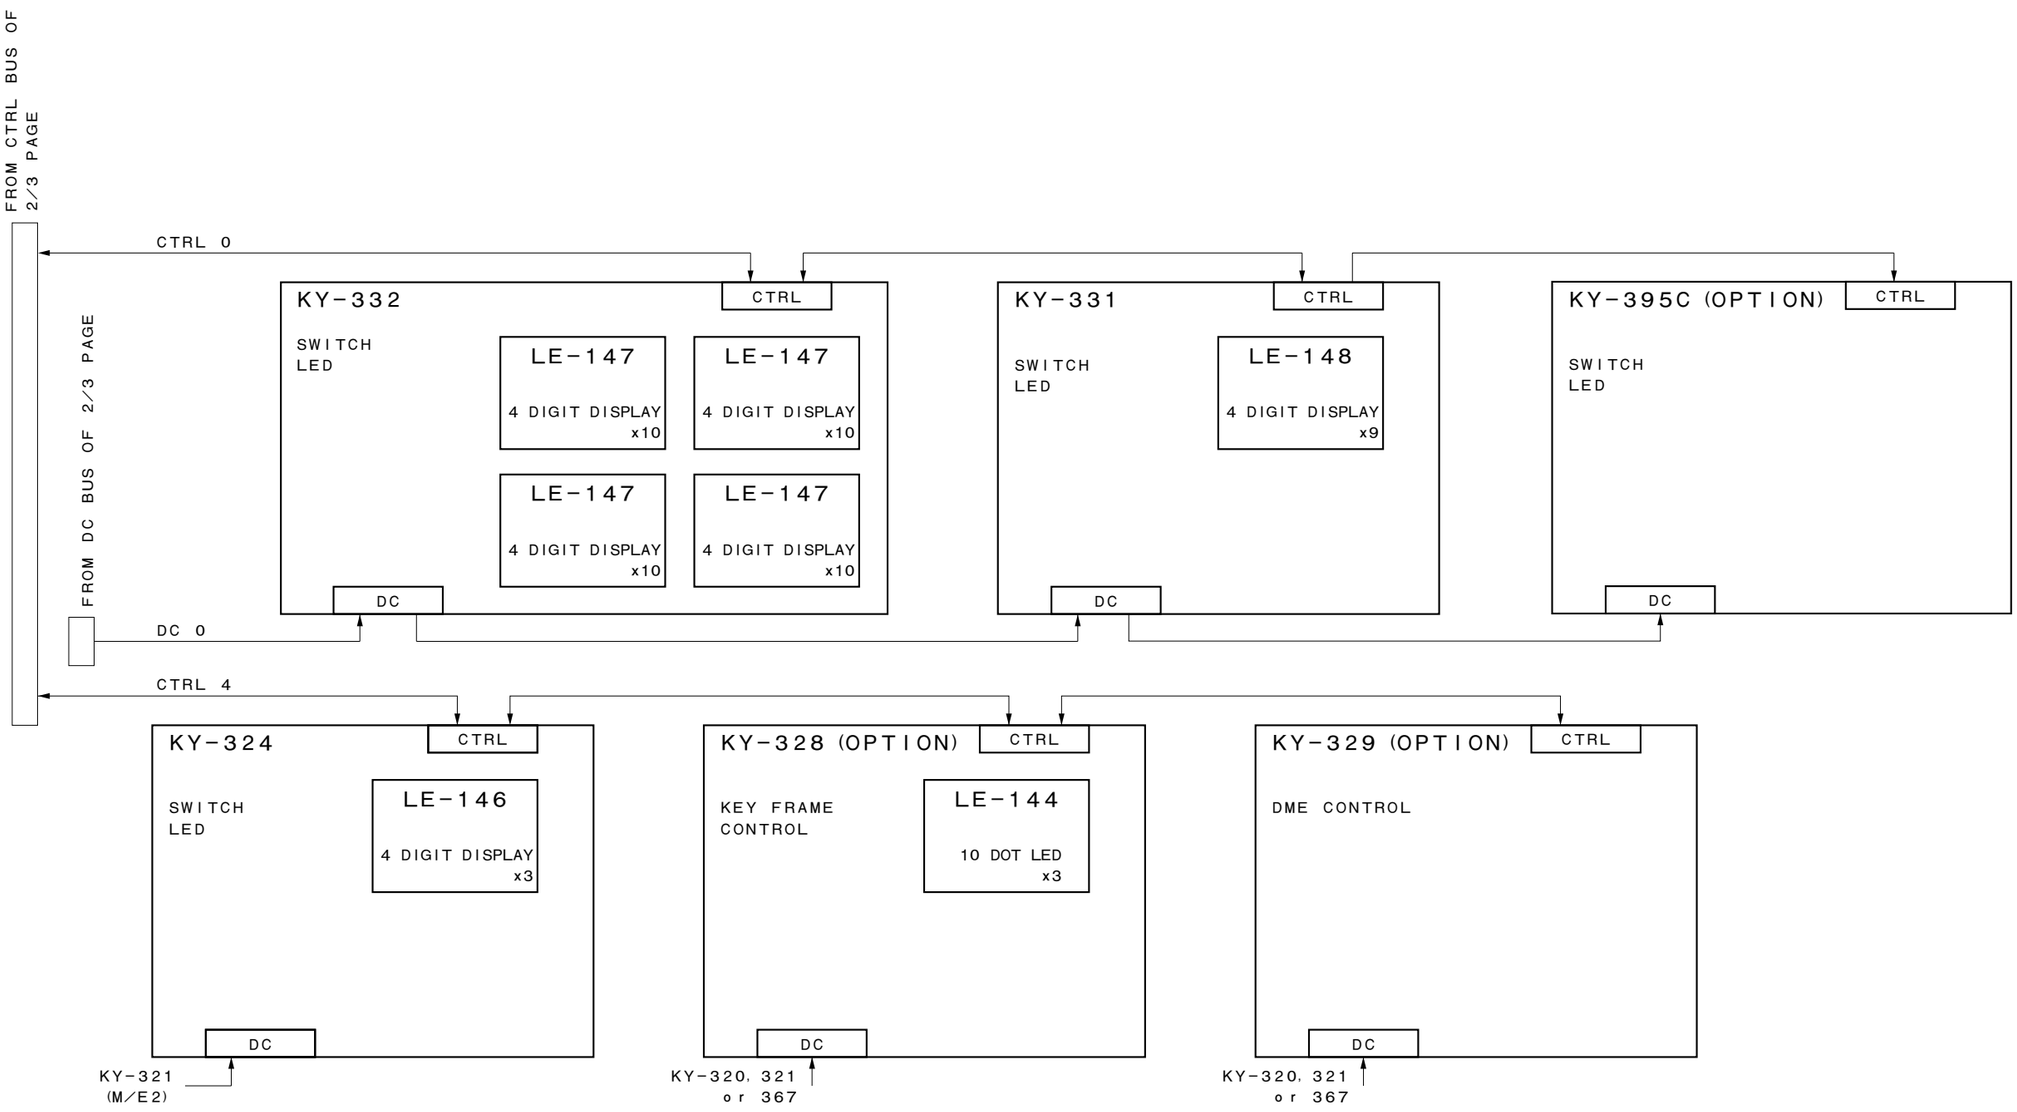

Overall (3/3)
BKDS-7025/7026

5-1-4. HKDS-7690A


HKDS-7690A (SY) : S/N 10001 and Higher

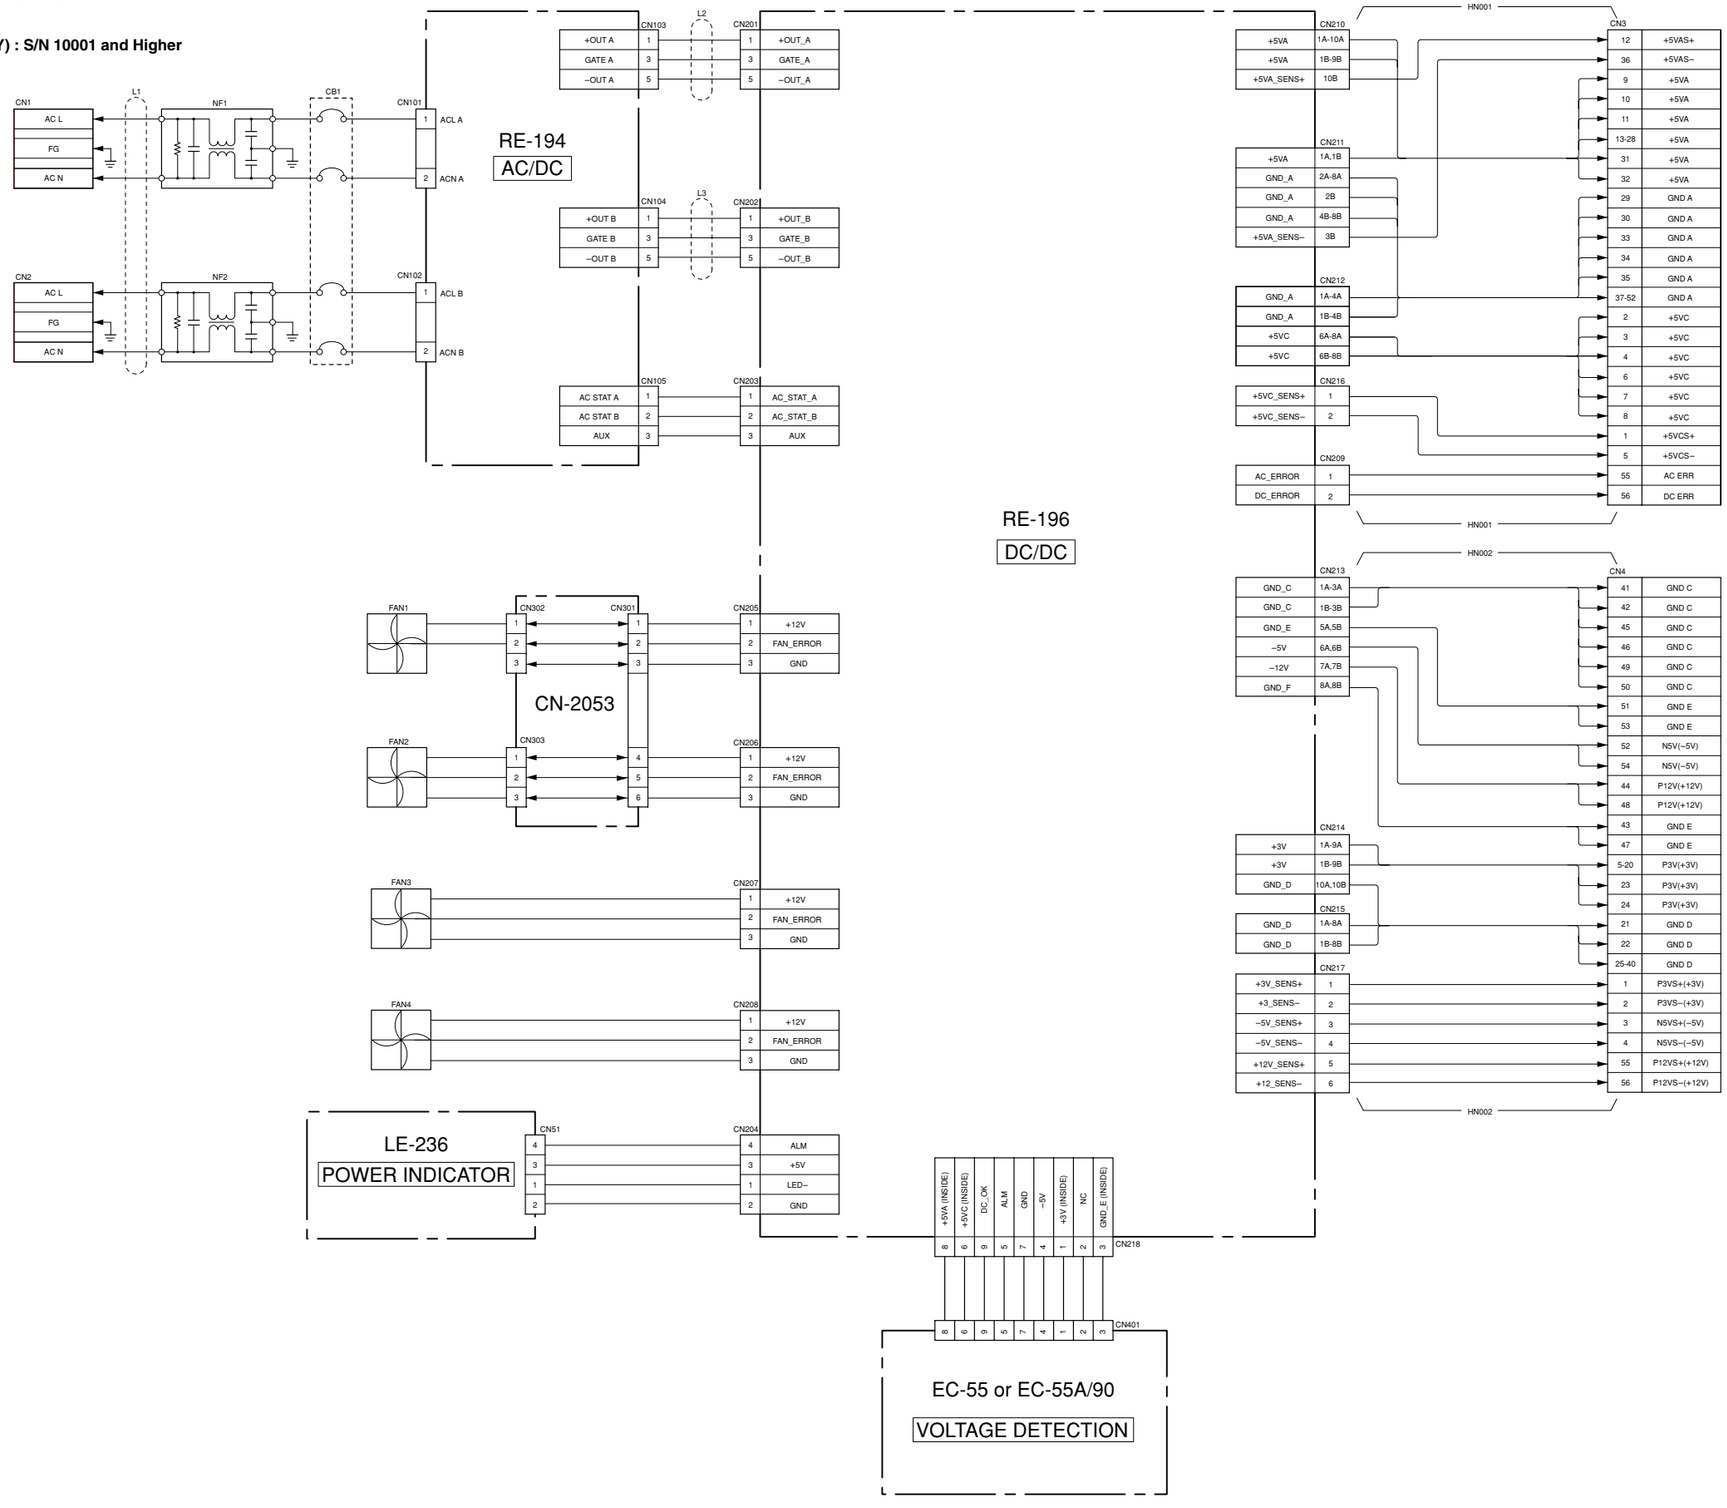

5-2. PC Board Block Diagrams/HDS-7000

5-2-1. CKG-10, IF-656

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

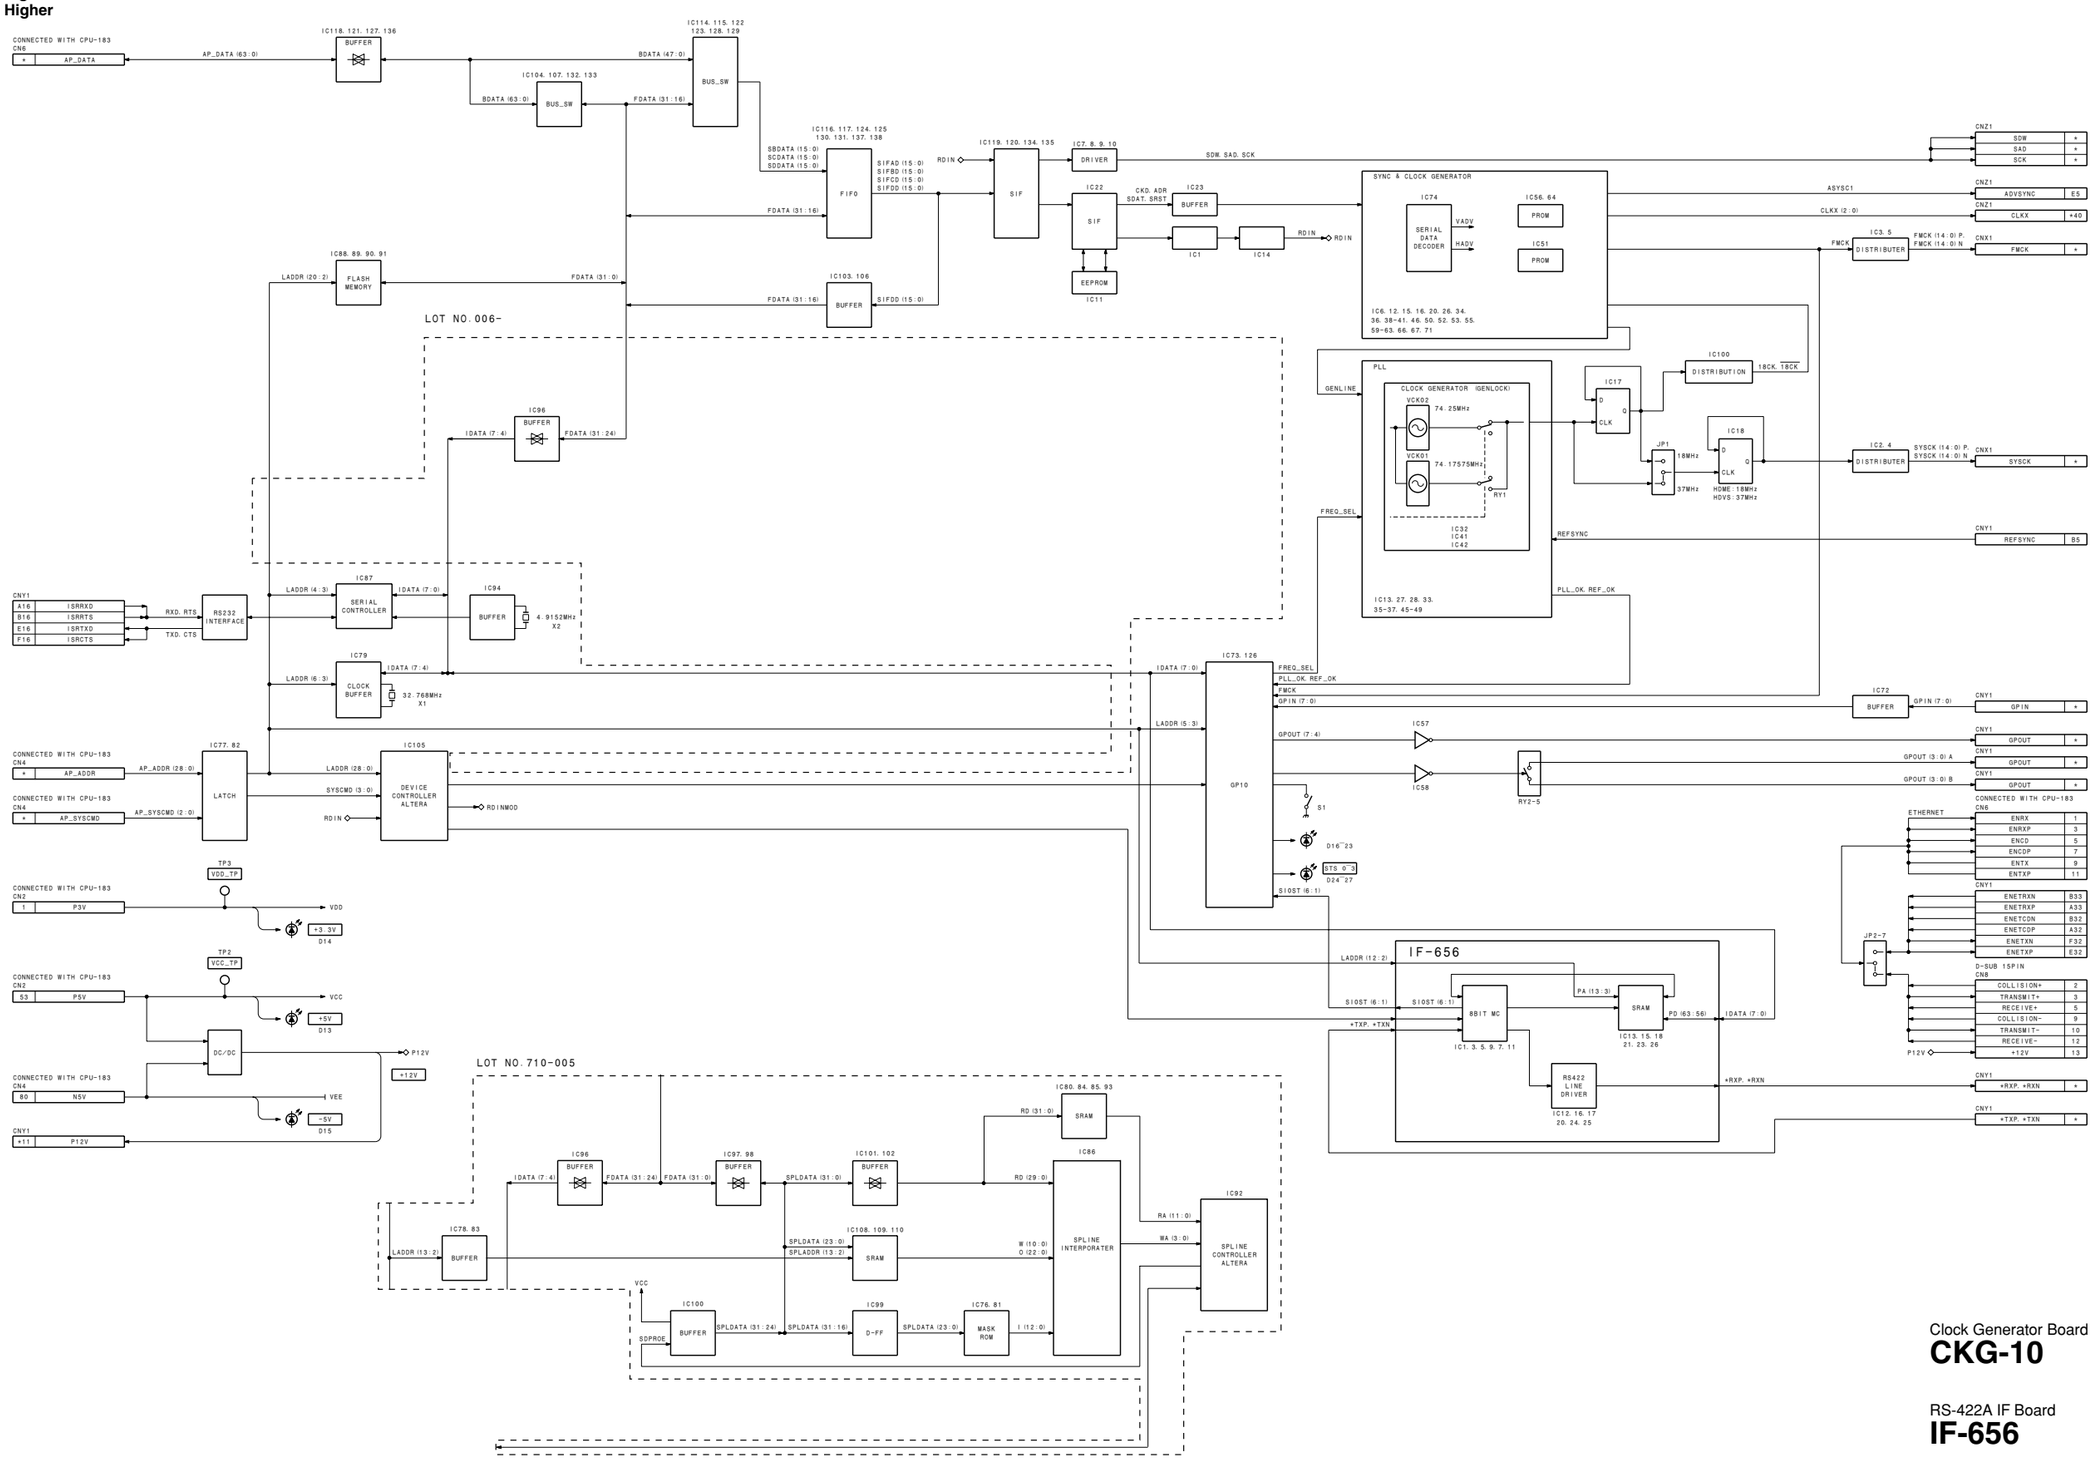


Clock Generator Board
CKG-10

RS-422A IF Board
IF-656

5-2-2. CKG-29, IF-656 (For 24P System)

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

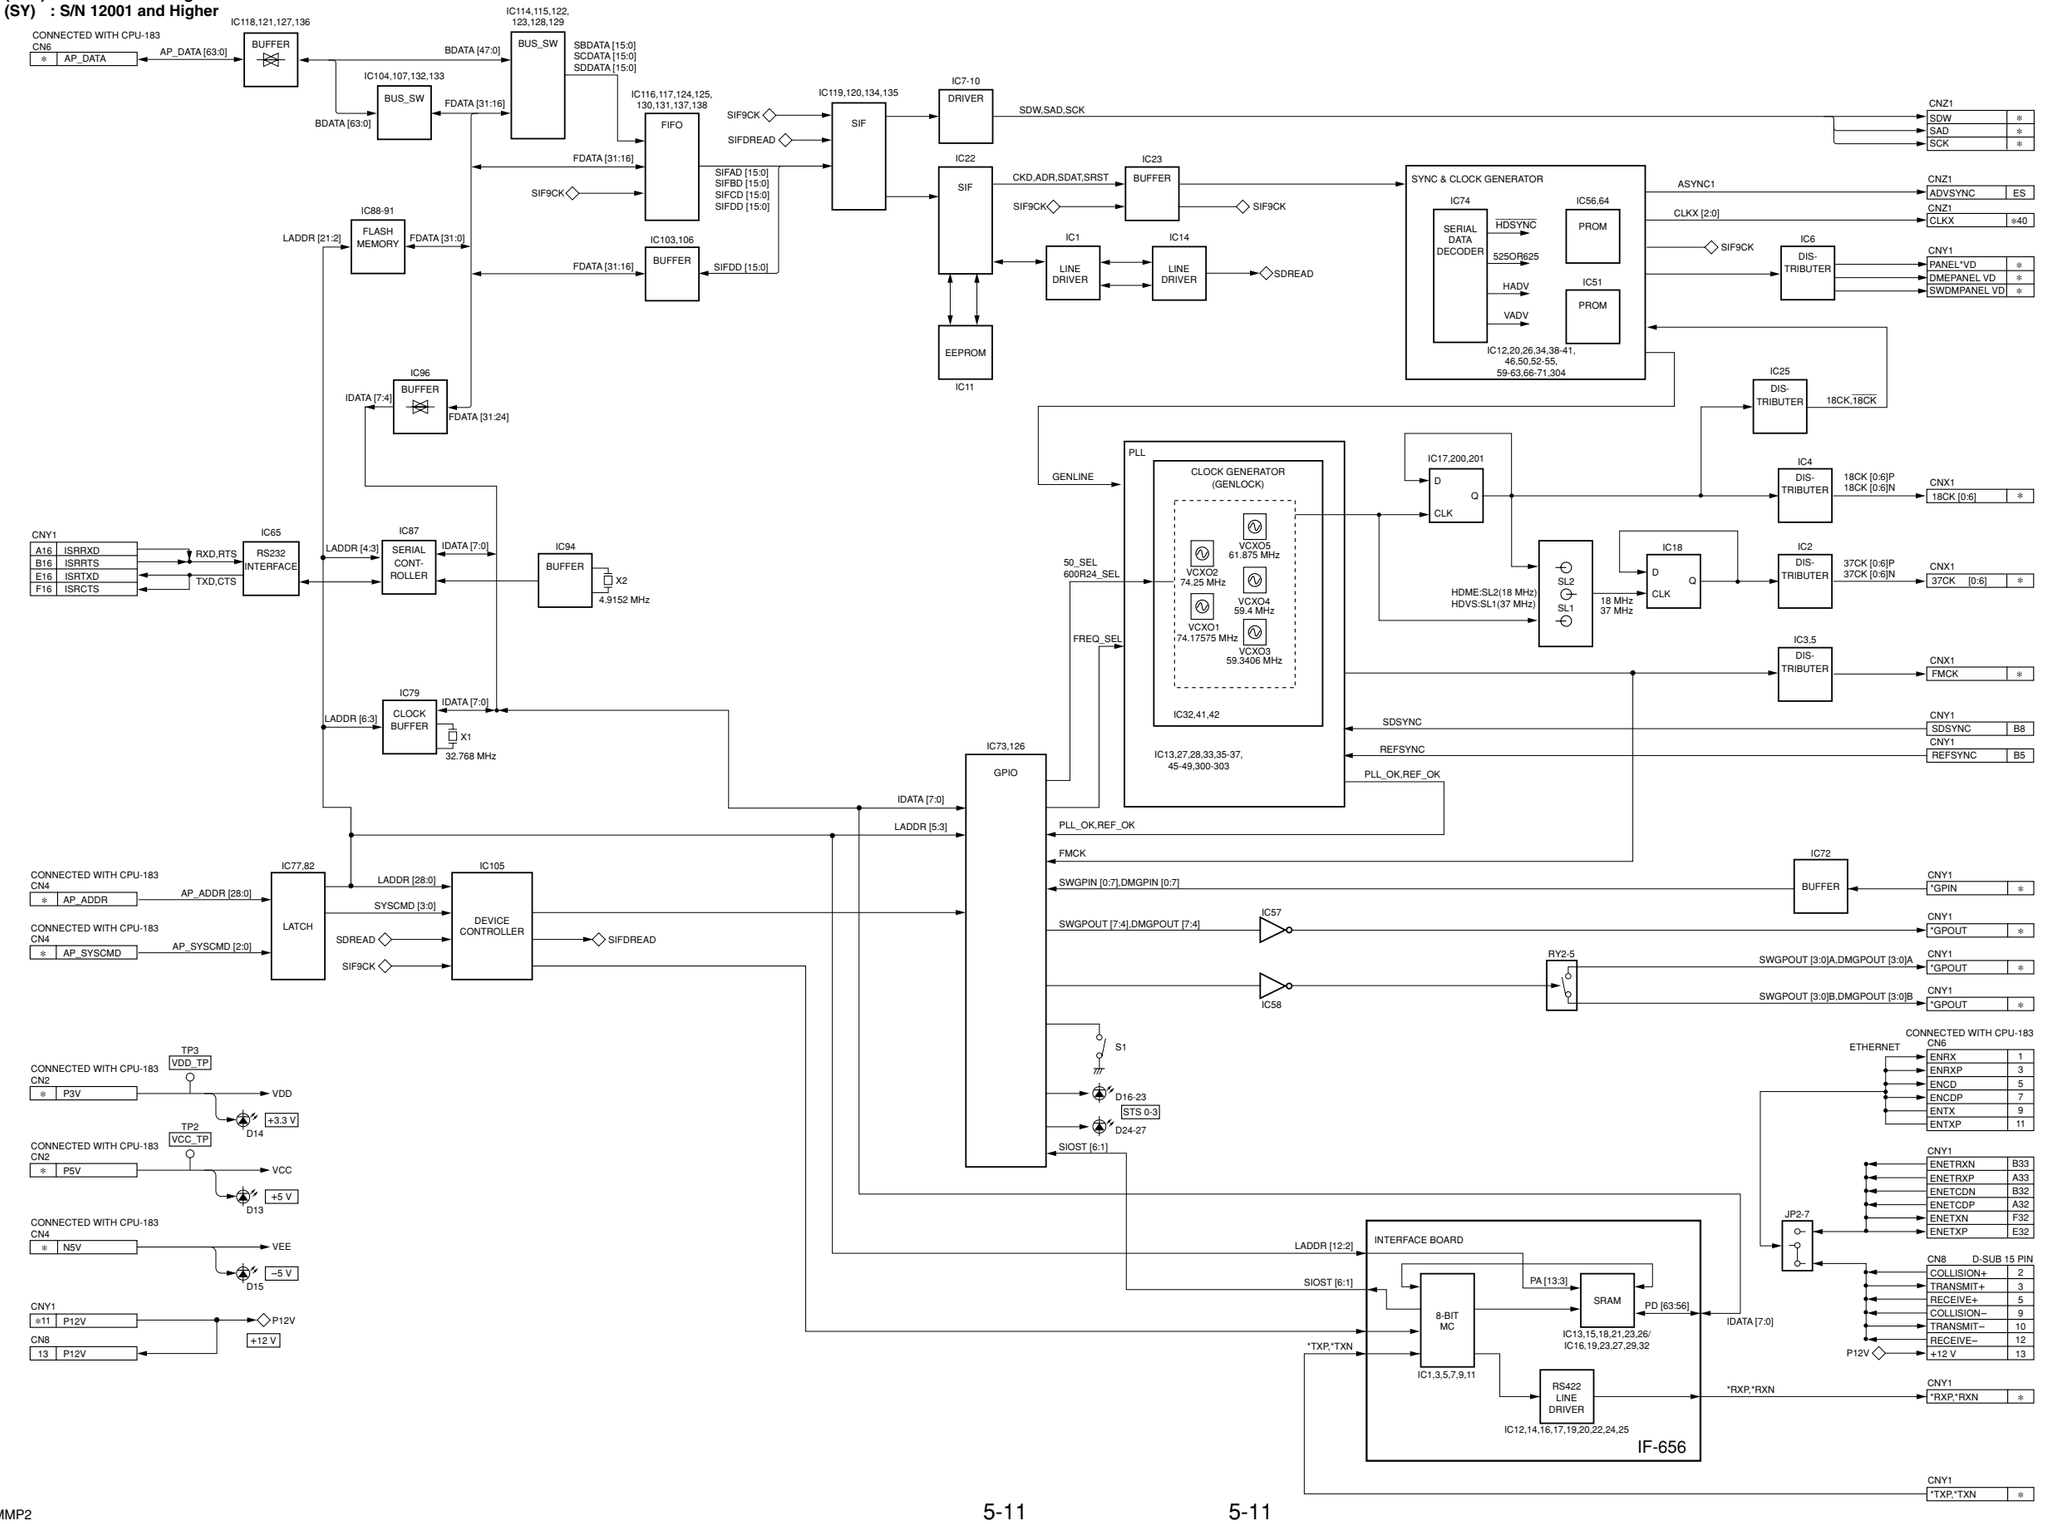


Clock Generator Board
CKG-29

RS-422A IF Board
IF-656


5-2-3. CPU-183

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

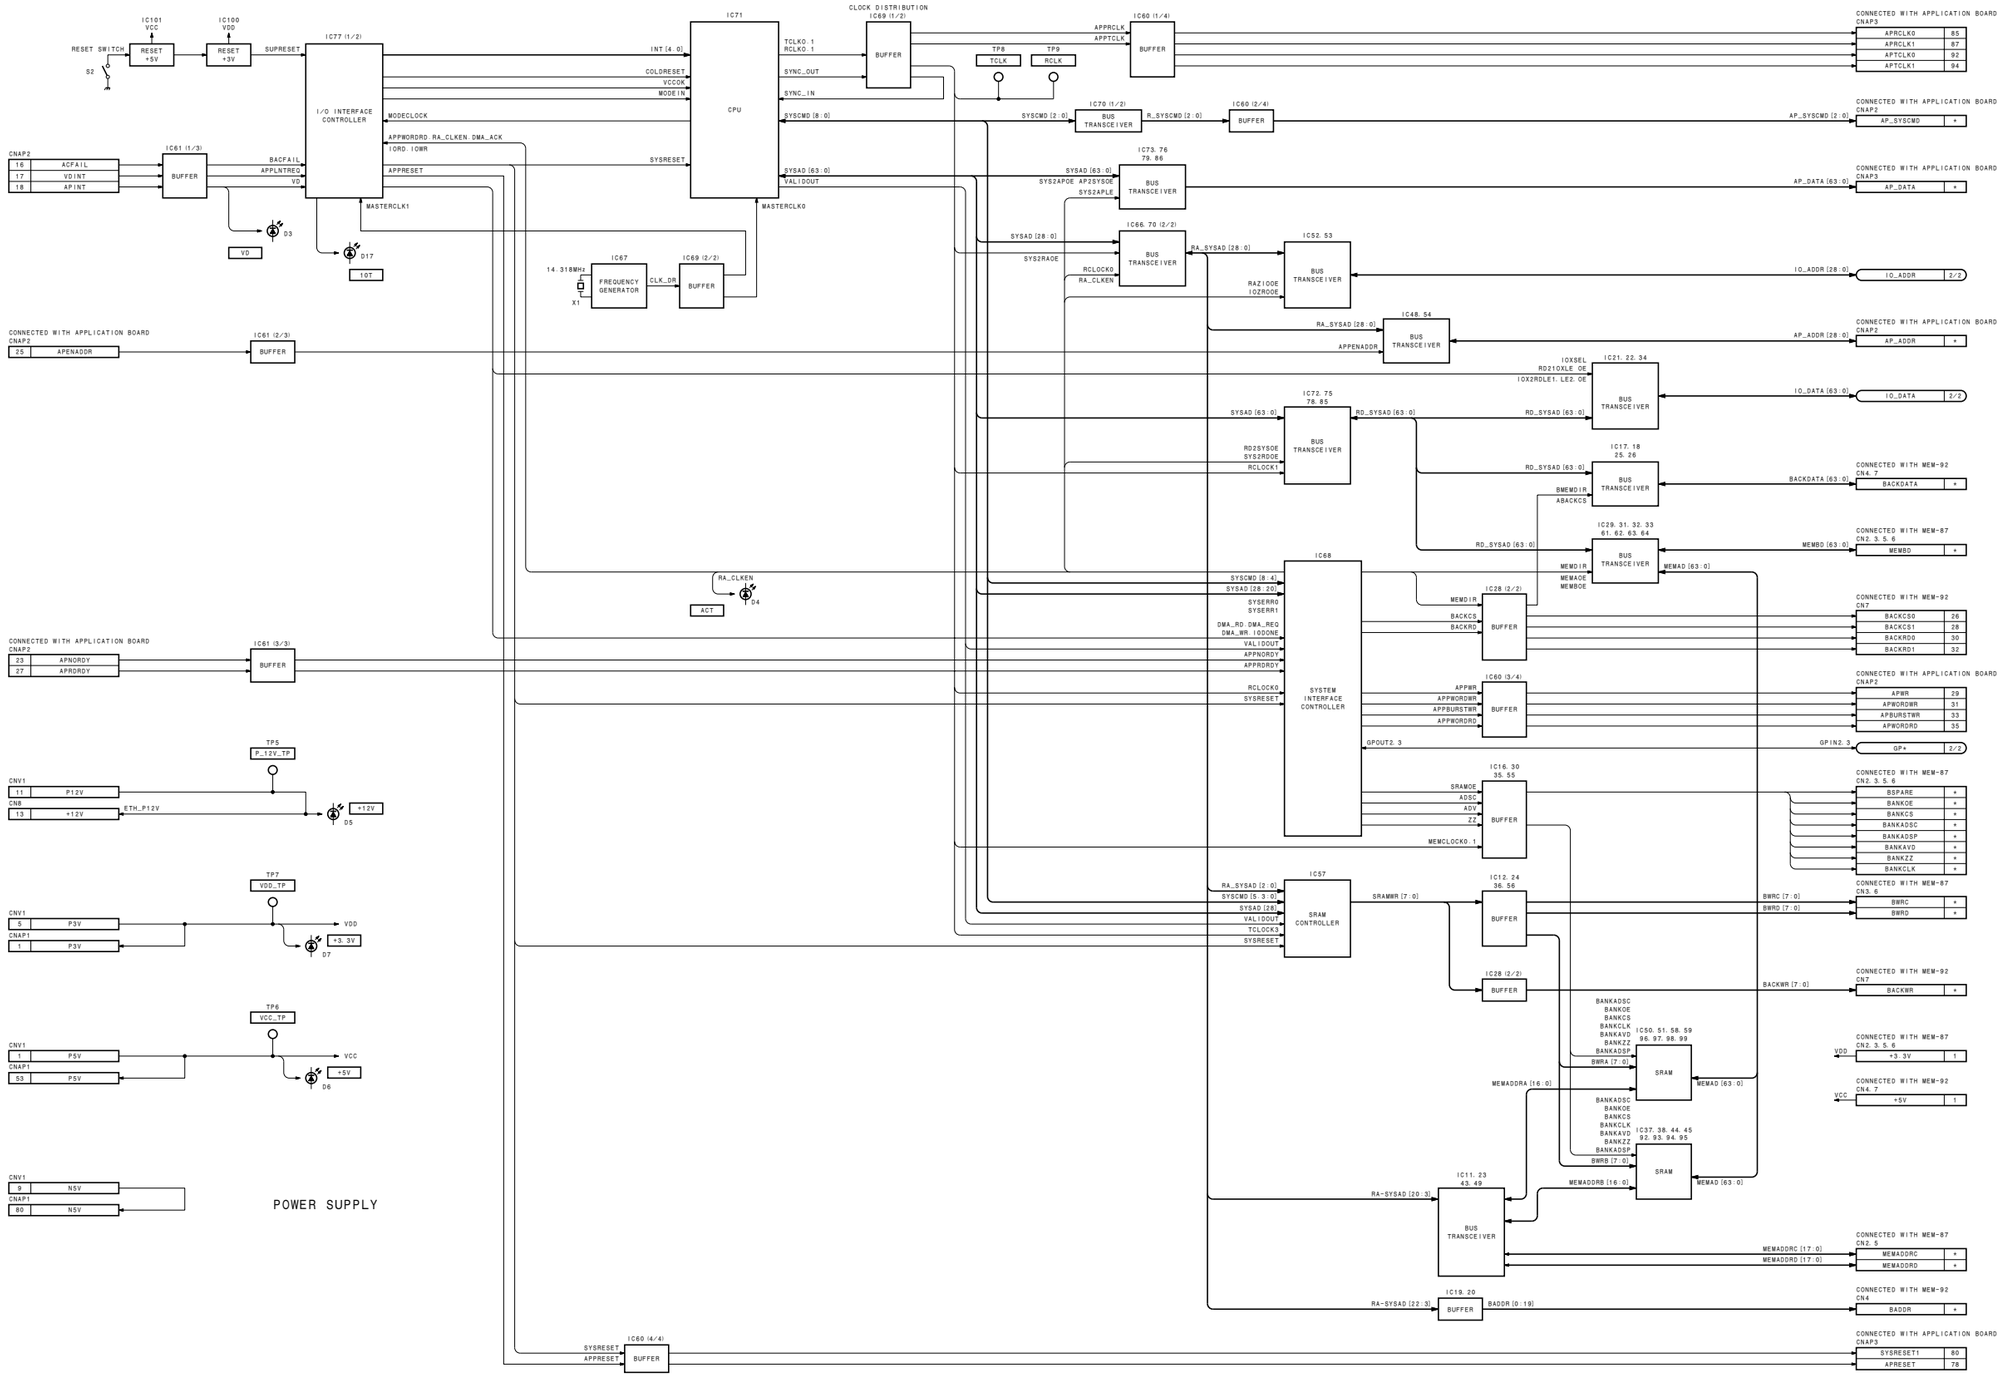

CPU Board
CPU-183 (1/2)

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

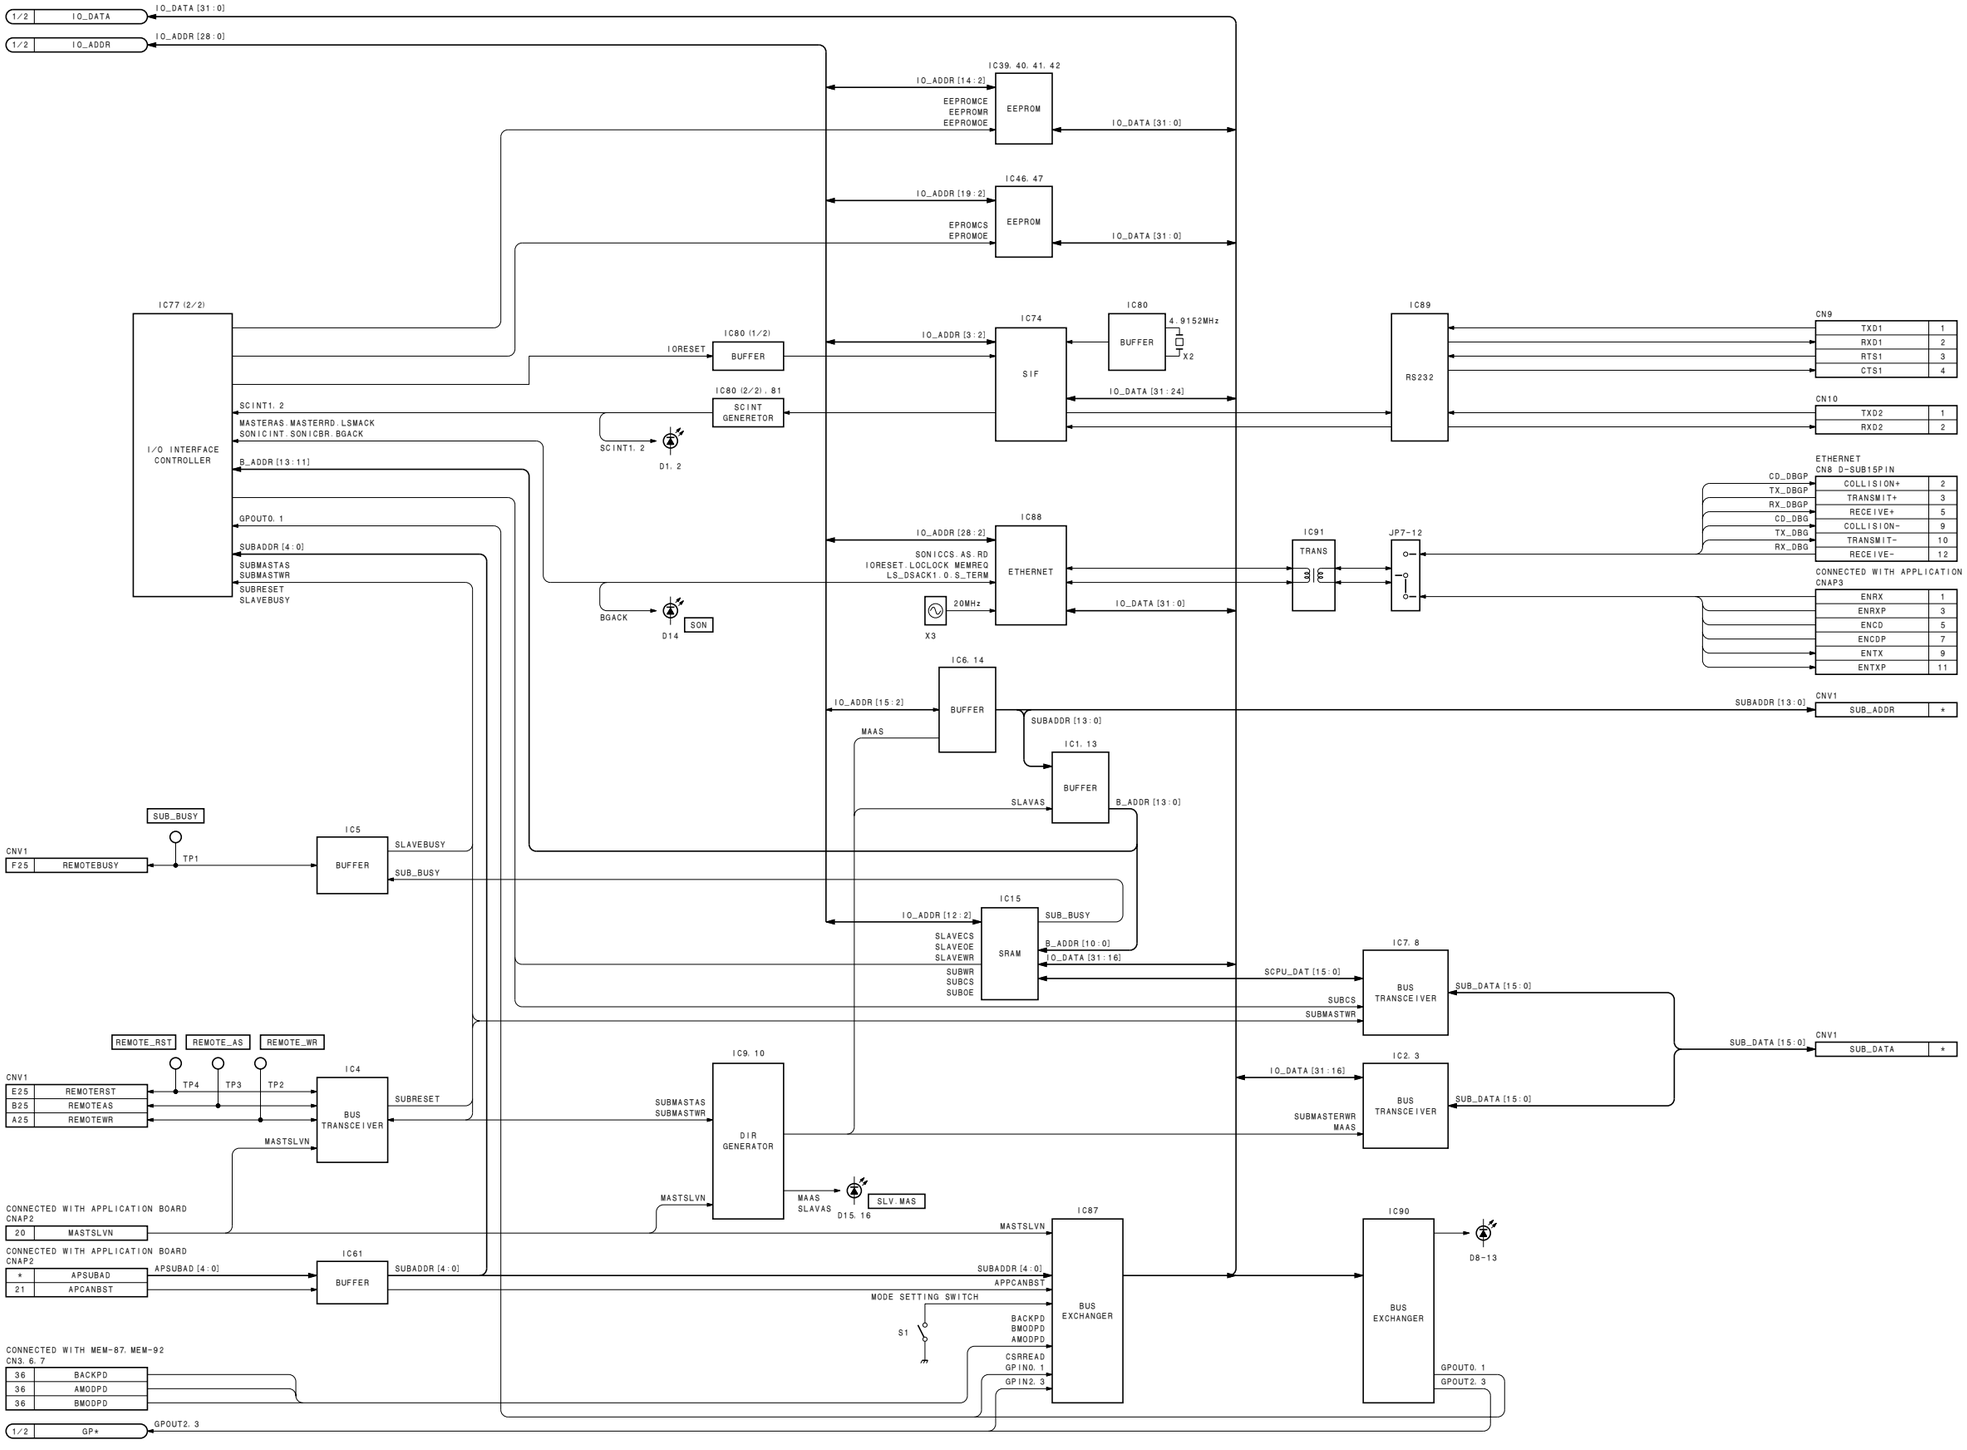


CPU Board
CPU-183 (2/2)

5-2-4. DI-21/DI-37

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

DI-21/DI-37 (1/2) Block Diagram

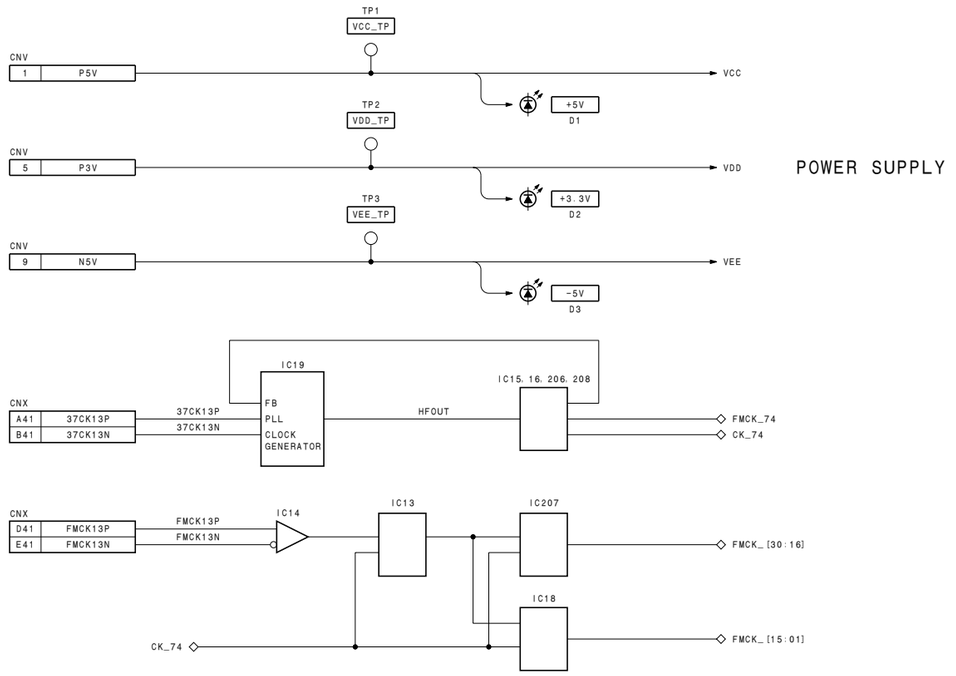


Input Board
DI-21/DI-37 (1/2)

5-14


DI-21/DI-37 (2/2) Block Diagram

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

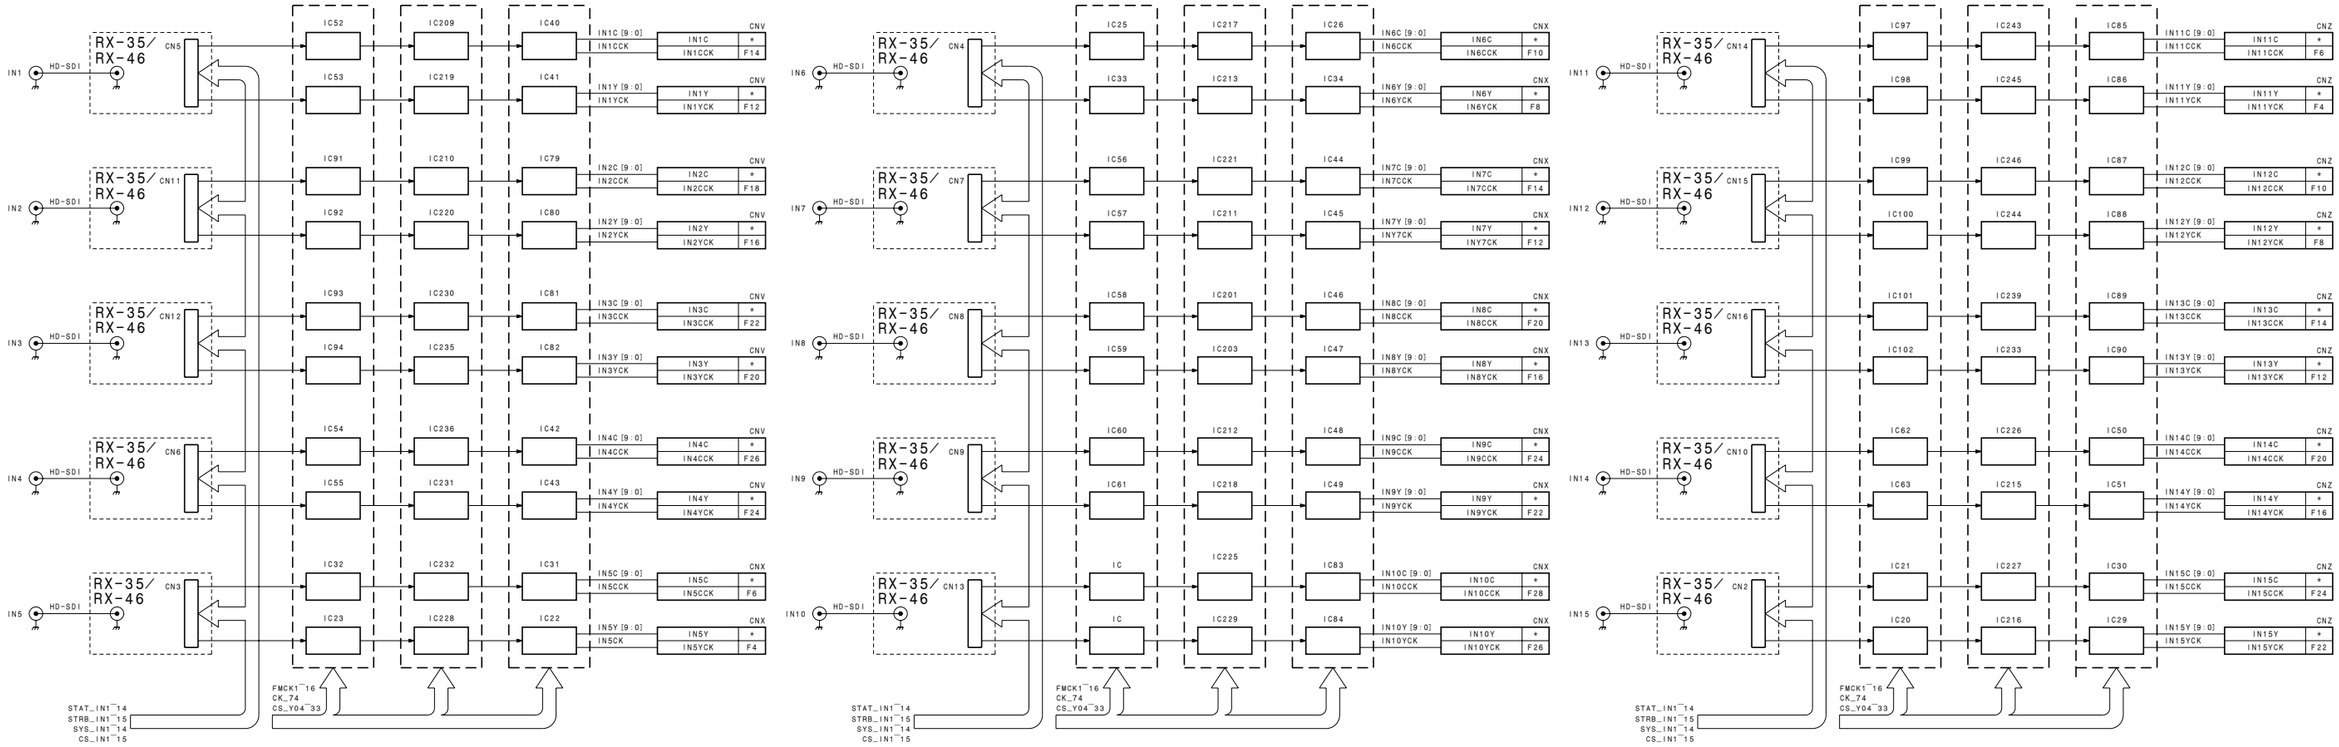


5-2-5. KPC-3/KPC-15

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

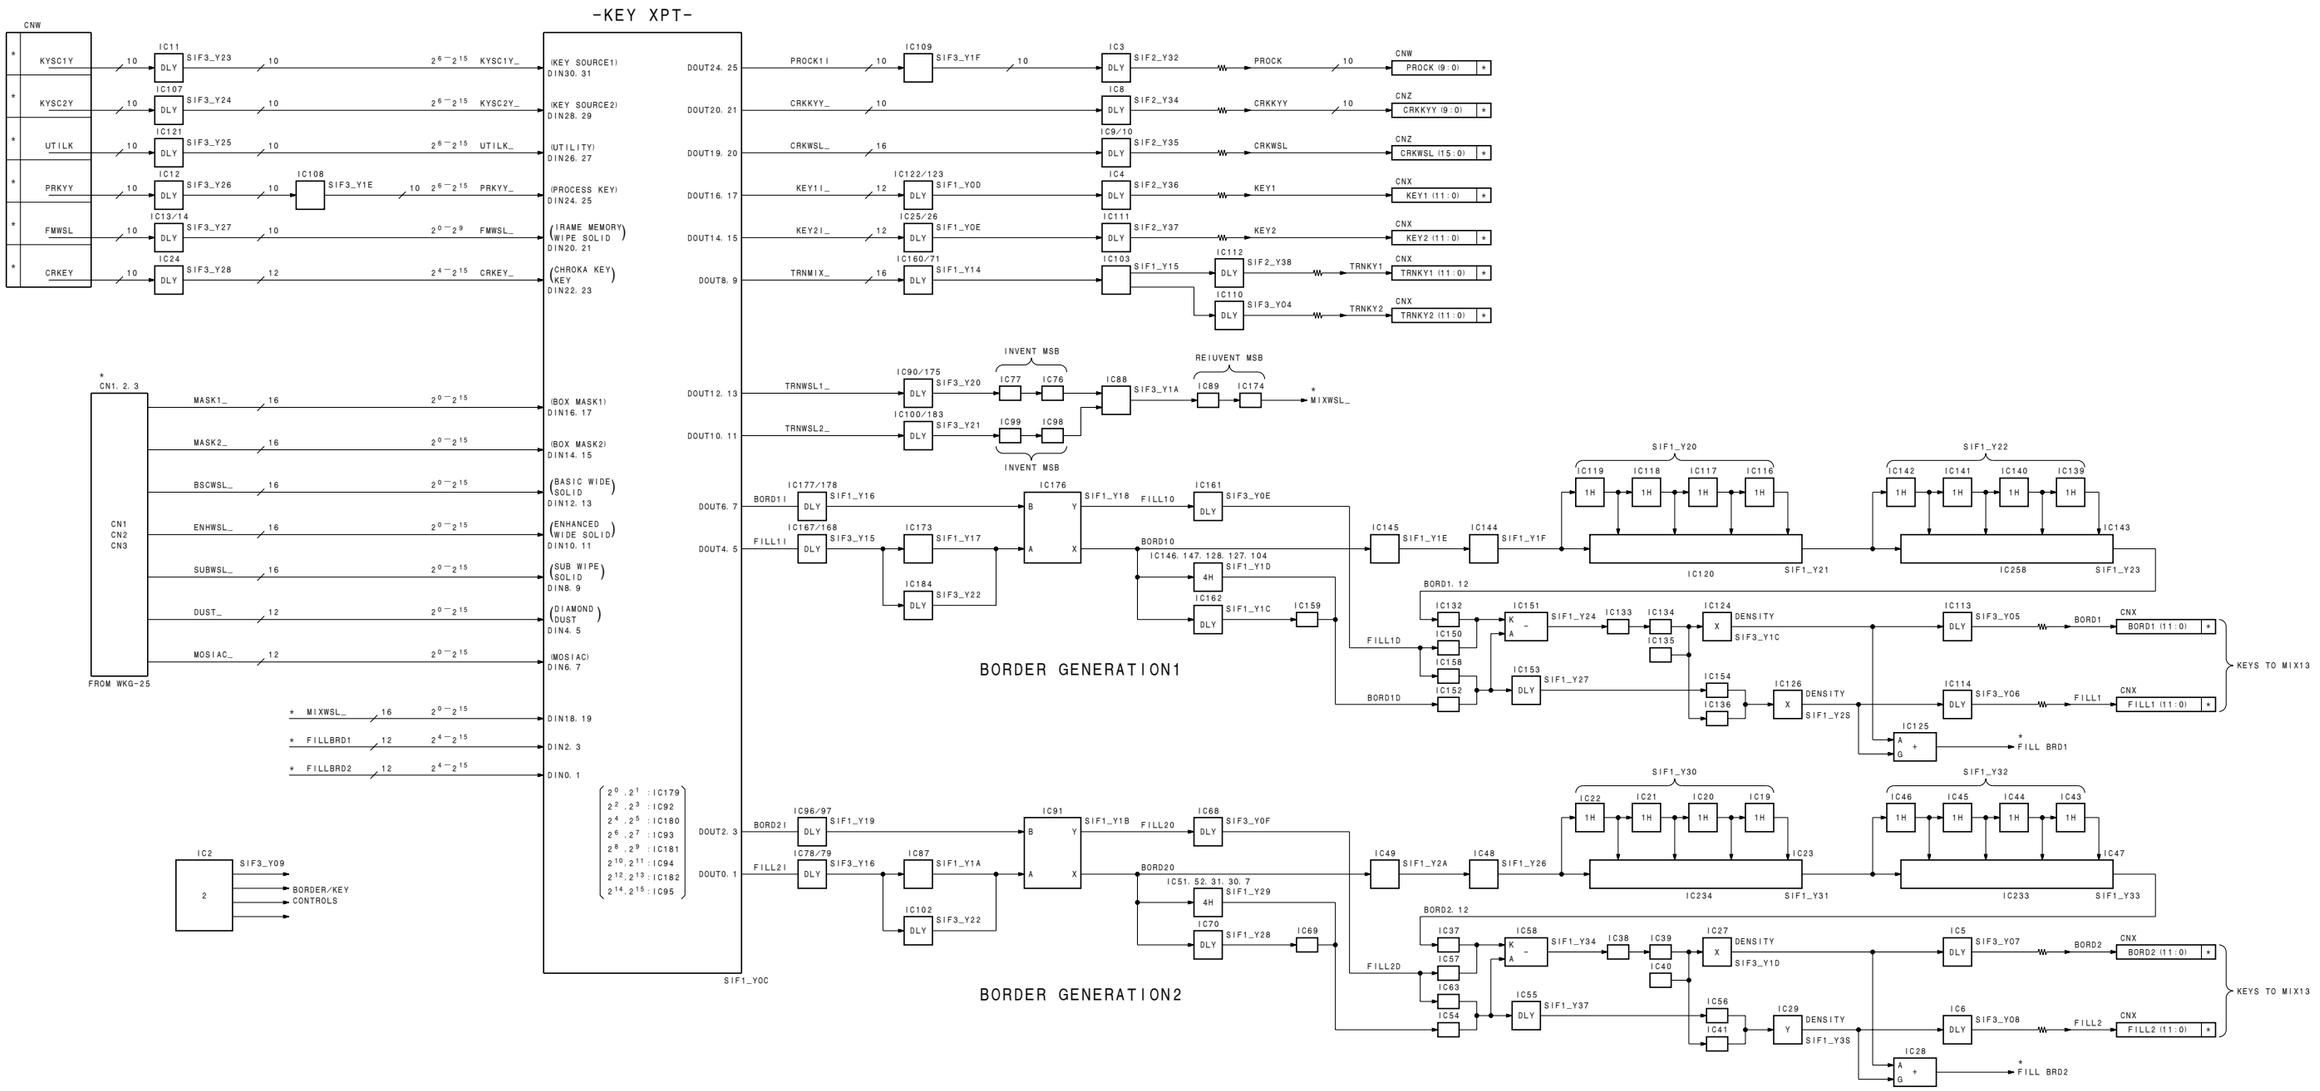


5-2-6. MEM-87

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

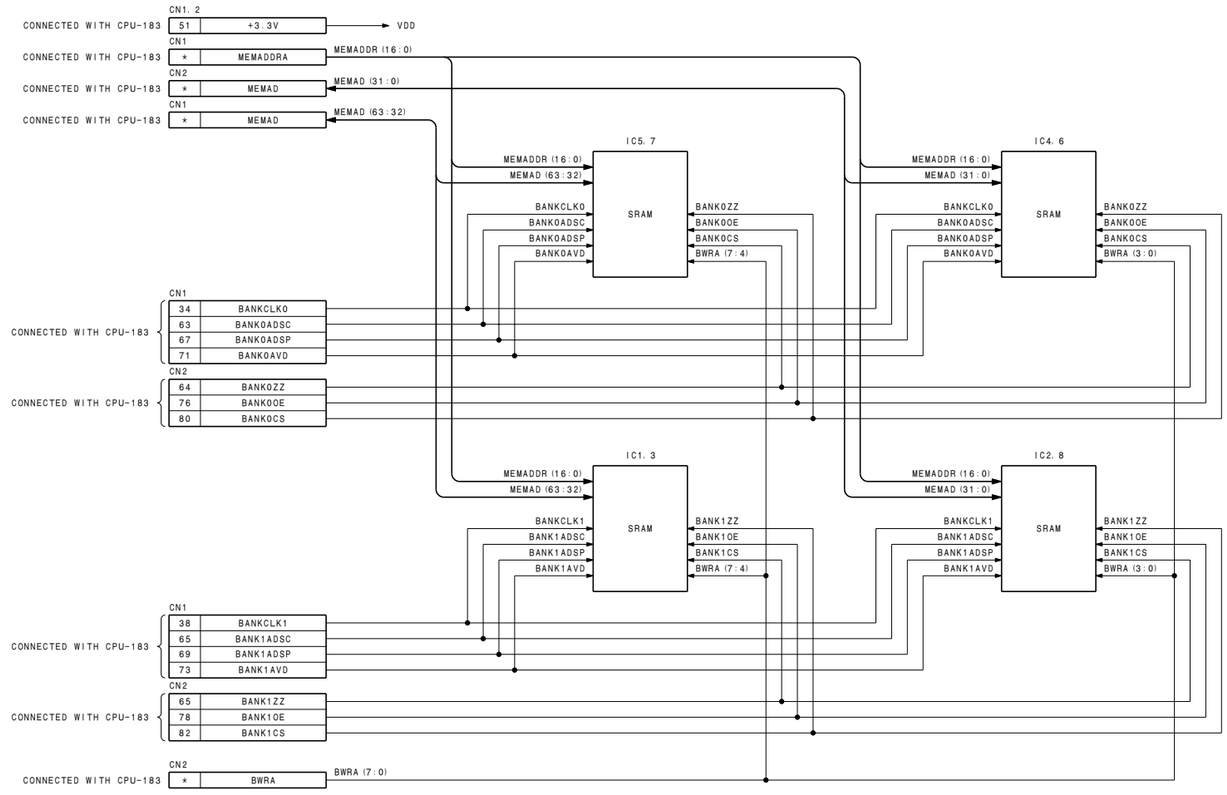


5-2-7. MEM-92

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

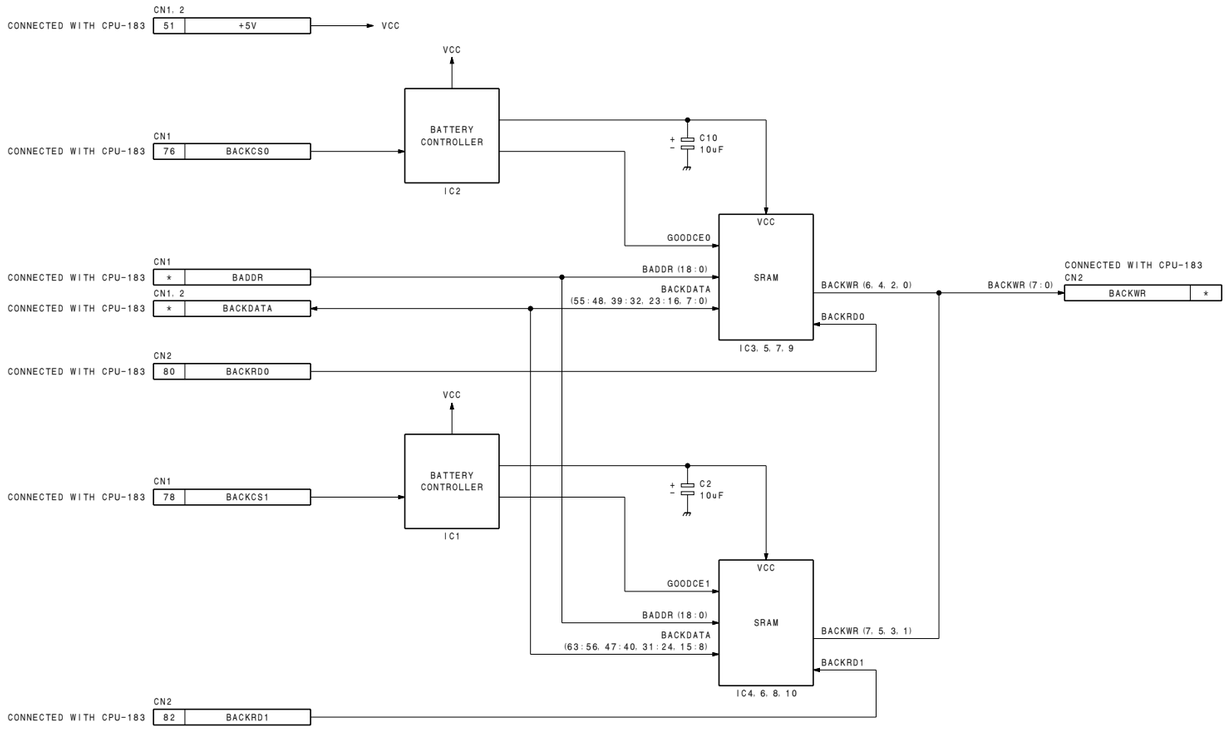


5-2-8. MIX-13

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

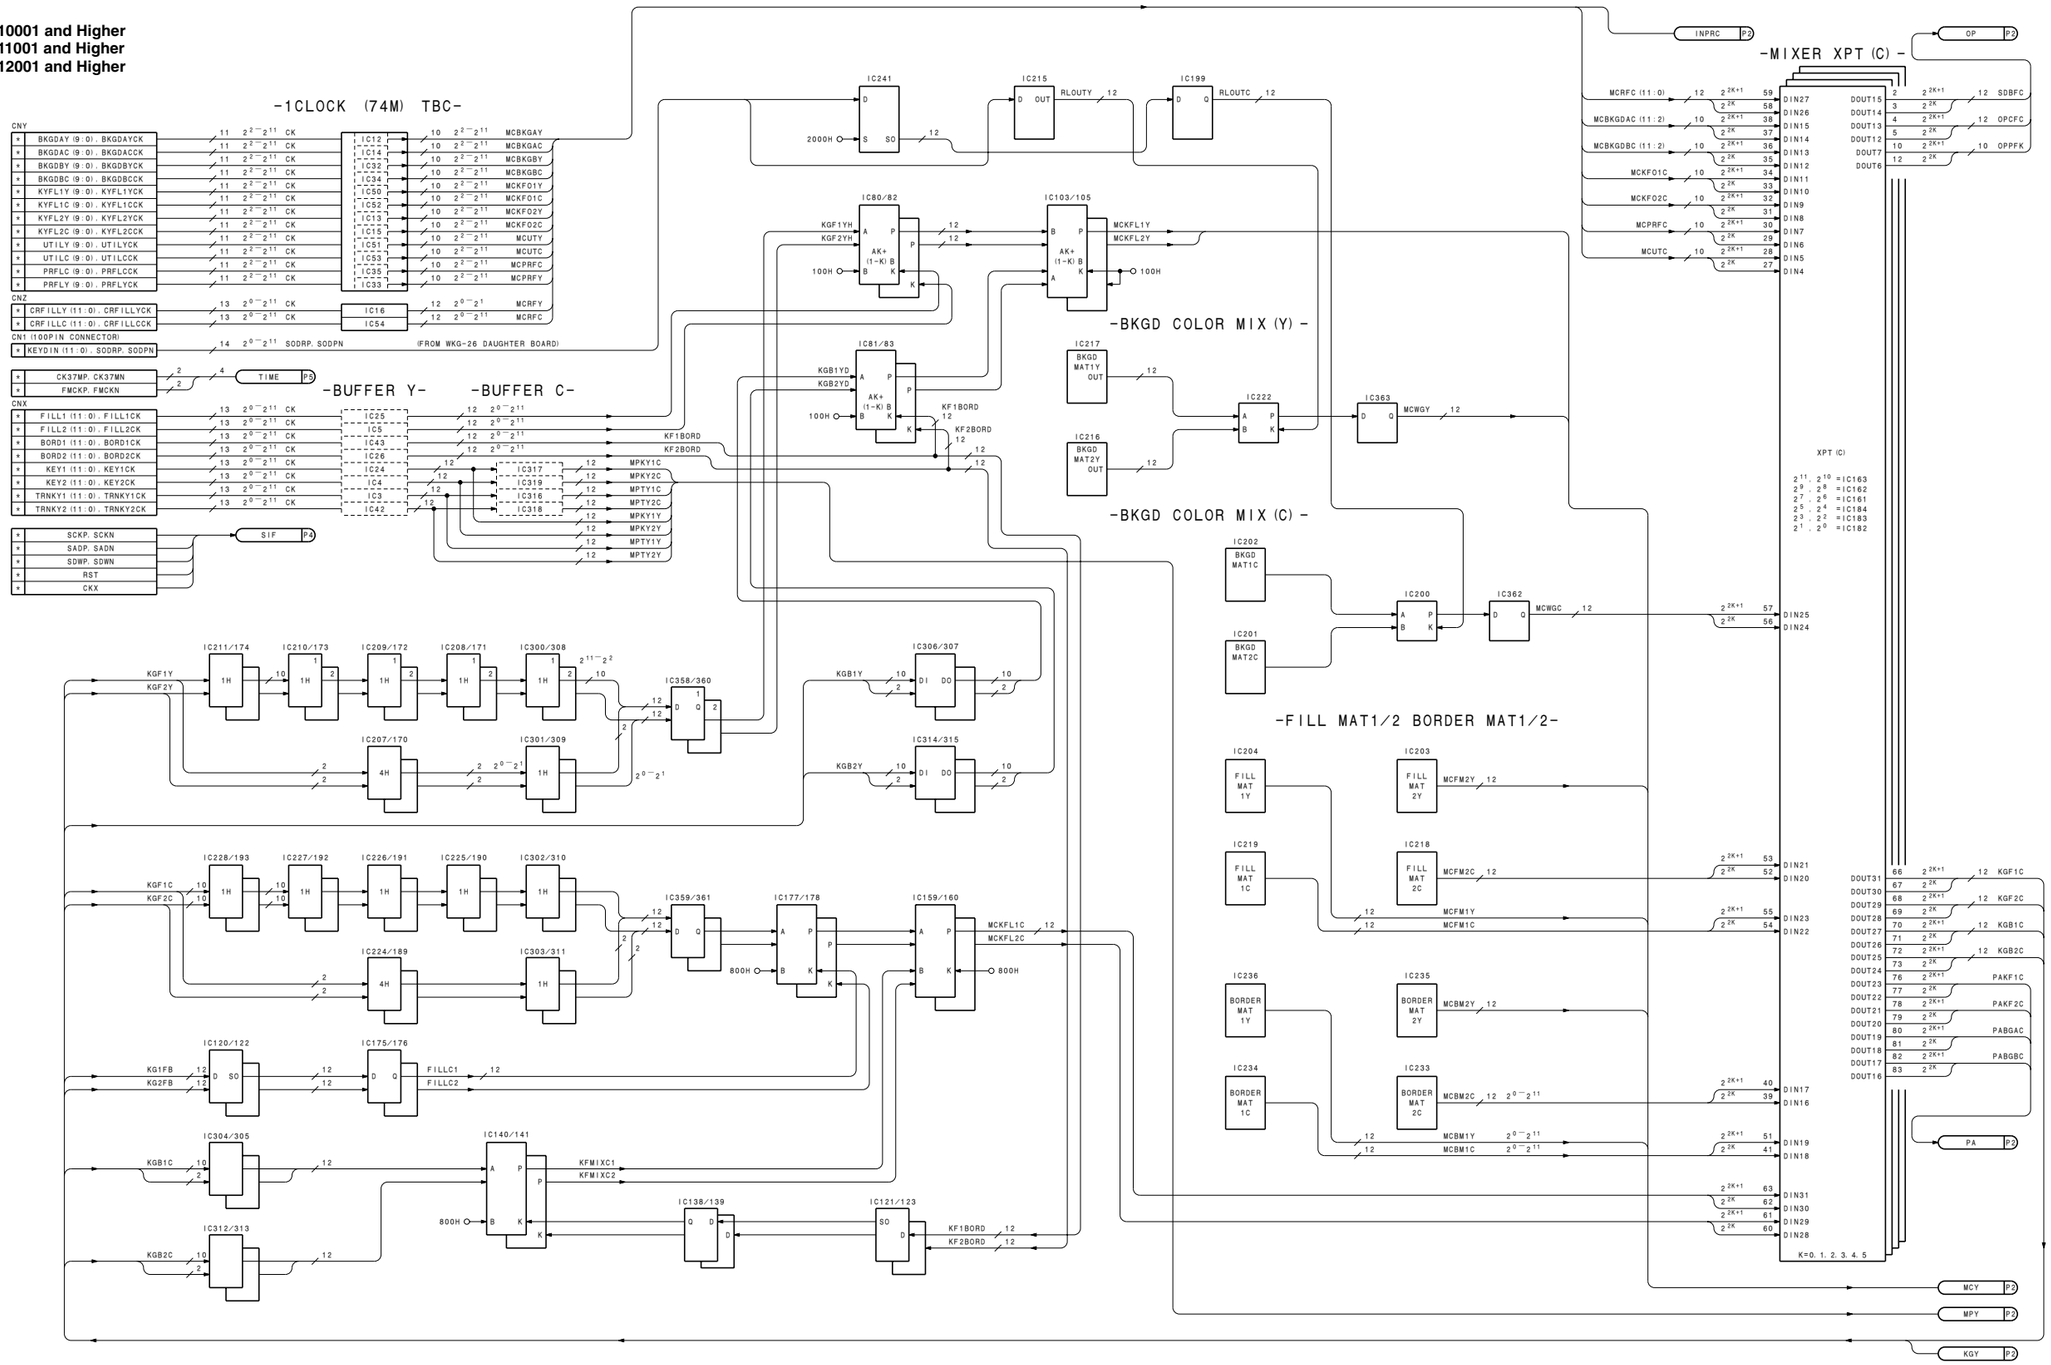

Mixer Board
MIX-13 (1/5)


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

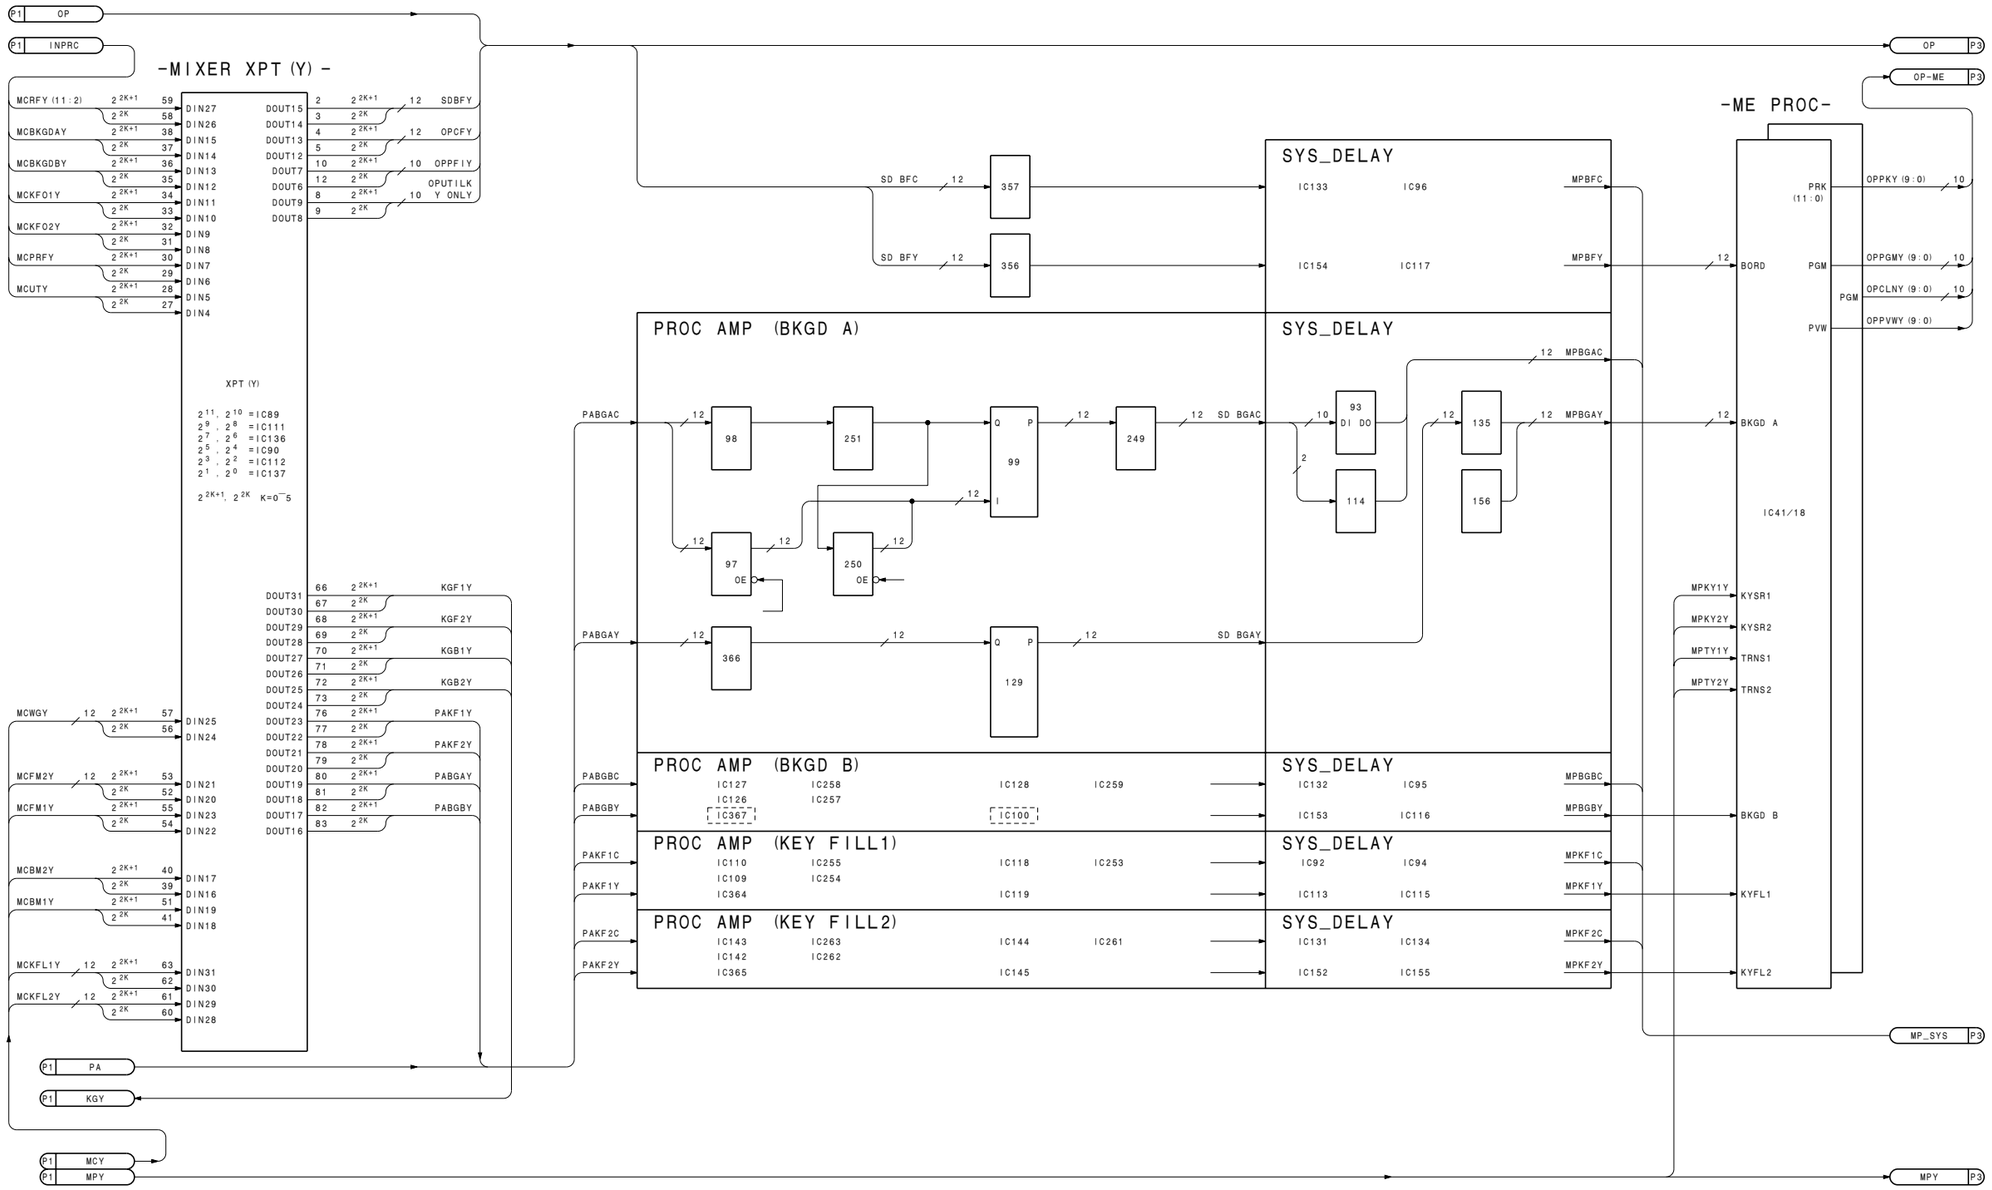

Mixer Board
MIX-13 (2/5)

MIX-13 (3/5) Block Diagram

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

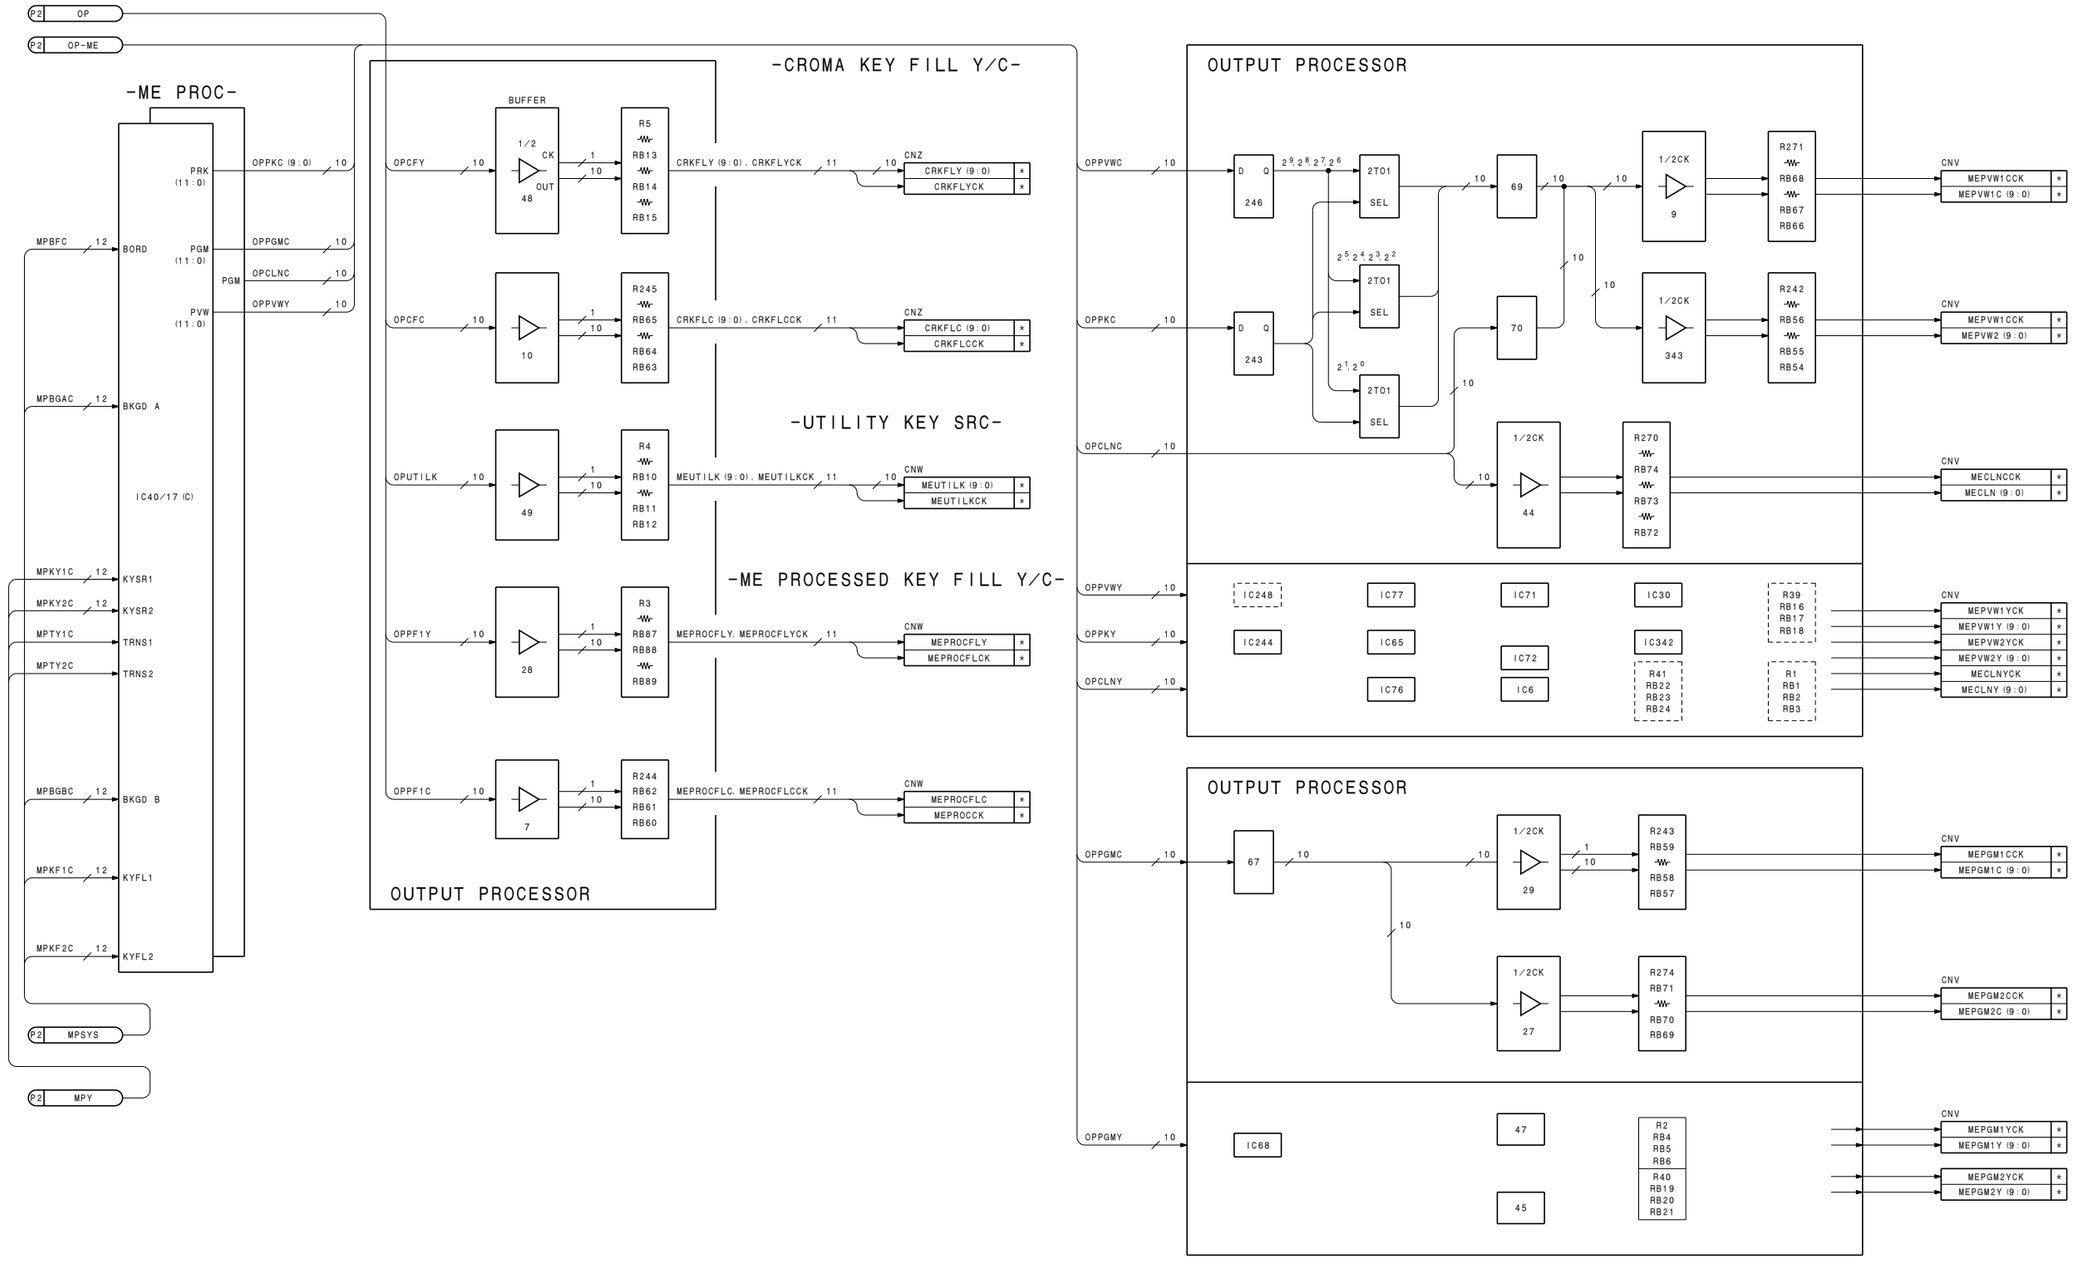


Mixer Board
MIX-13 (3/5)

5-21

MIX-13 (4/5) Block Diagram


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

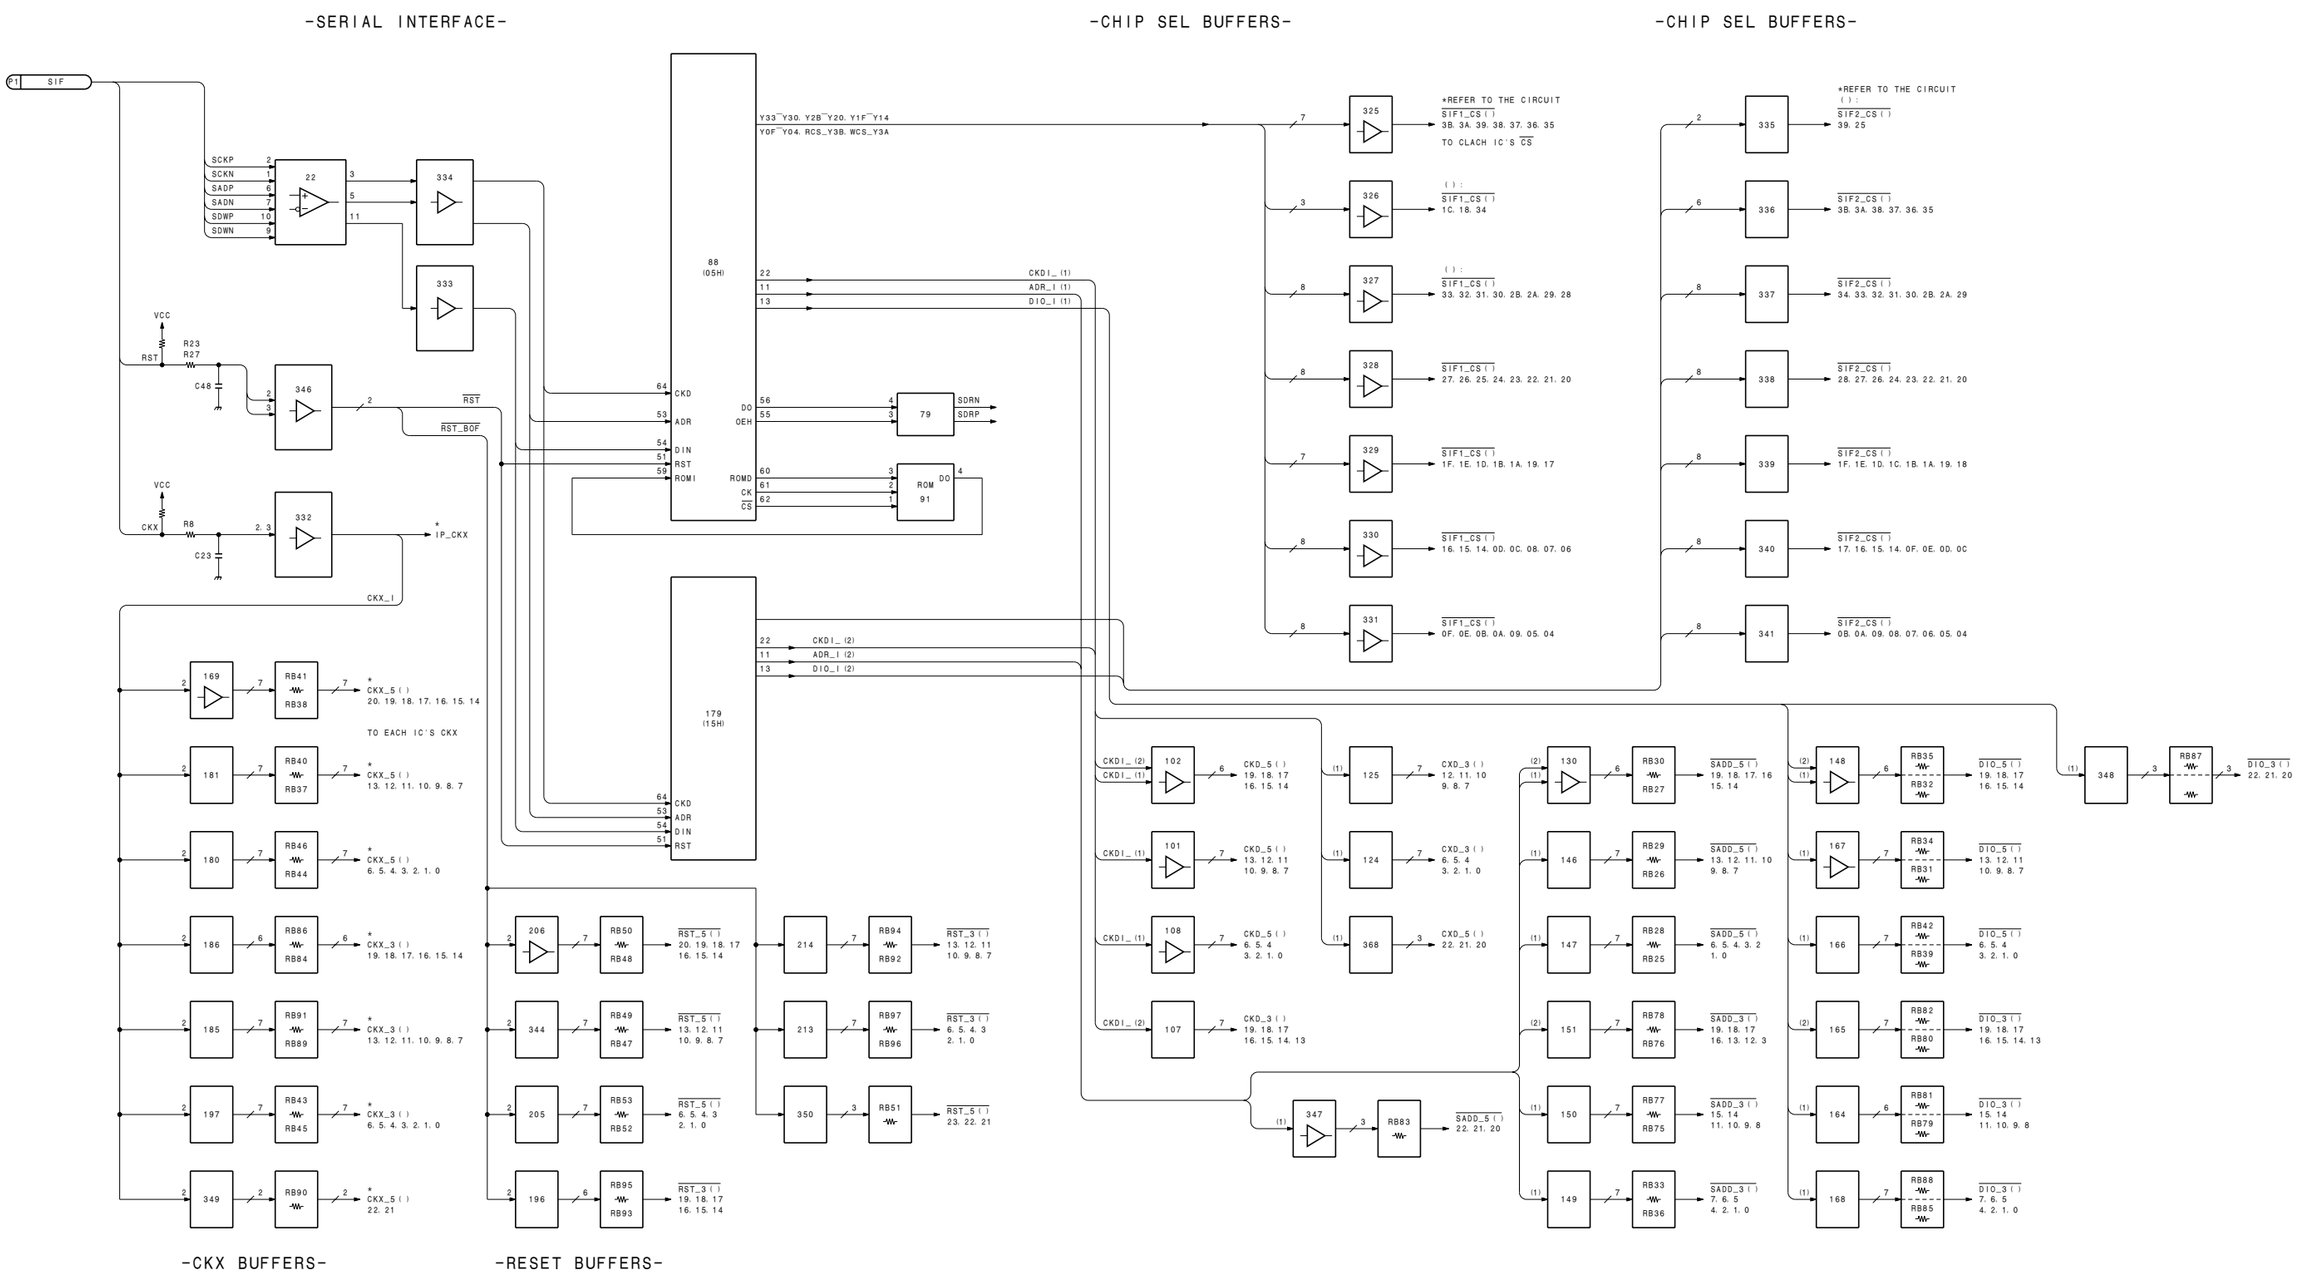

5-22


Mixer Board
MIX-13 (4/5)

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

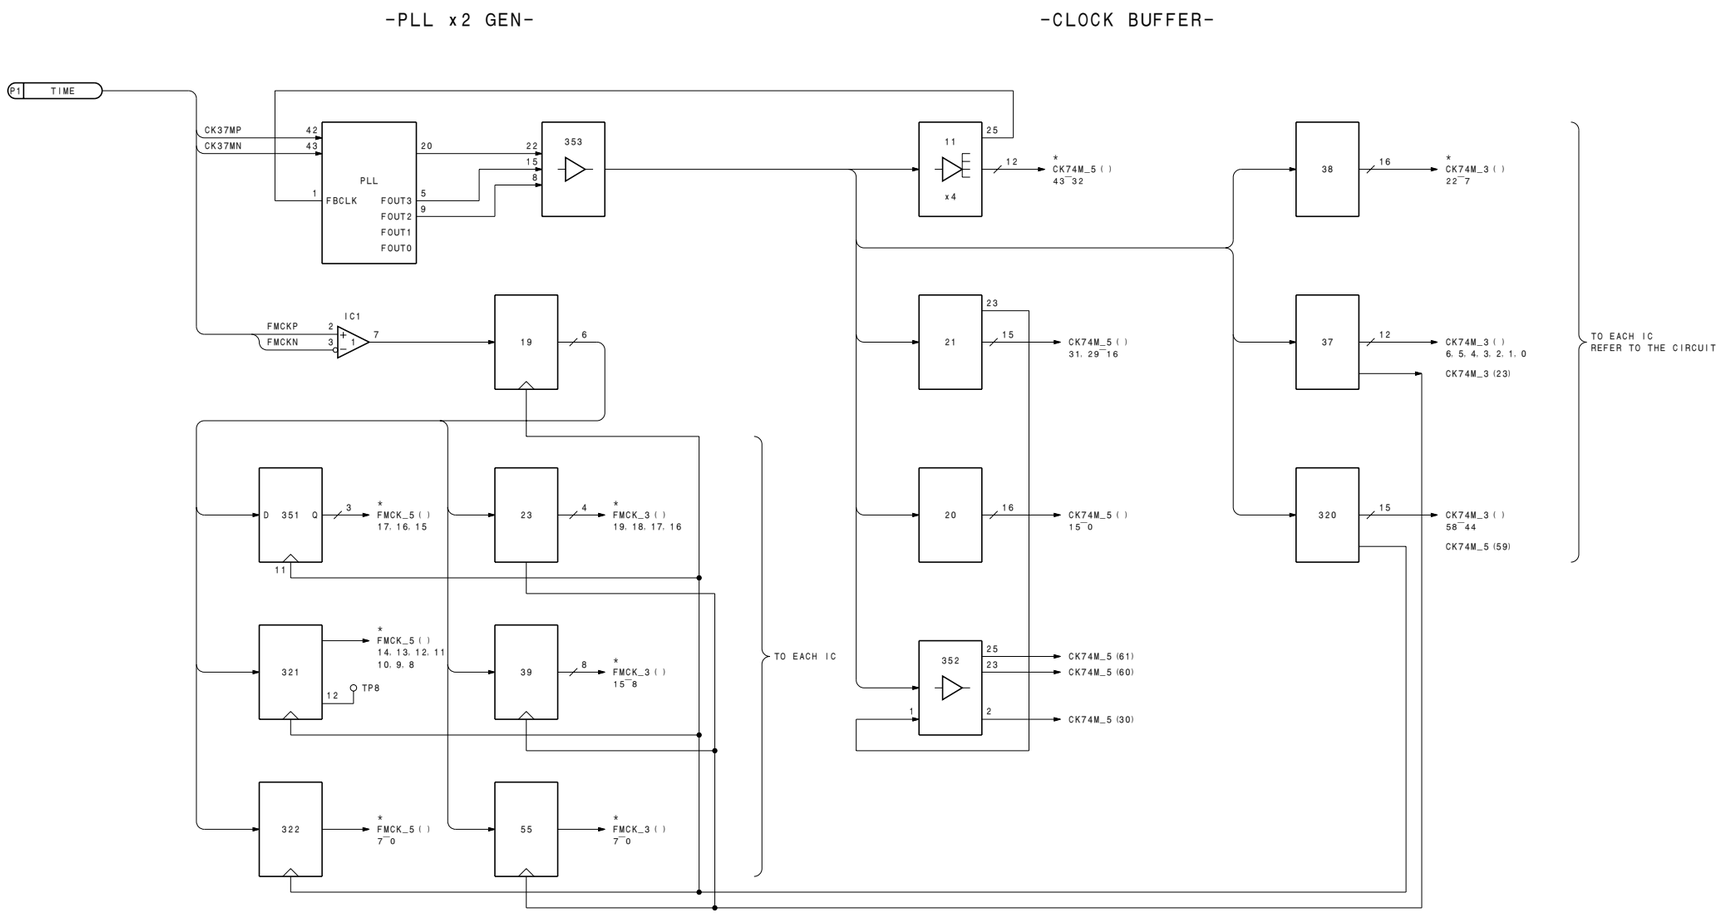

5-2-9. OUT-7/OUT-20


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

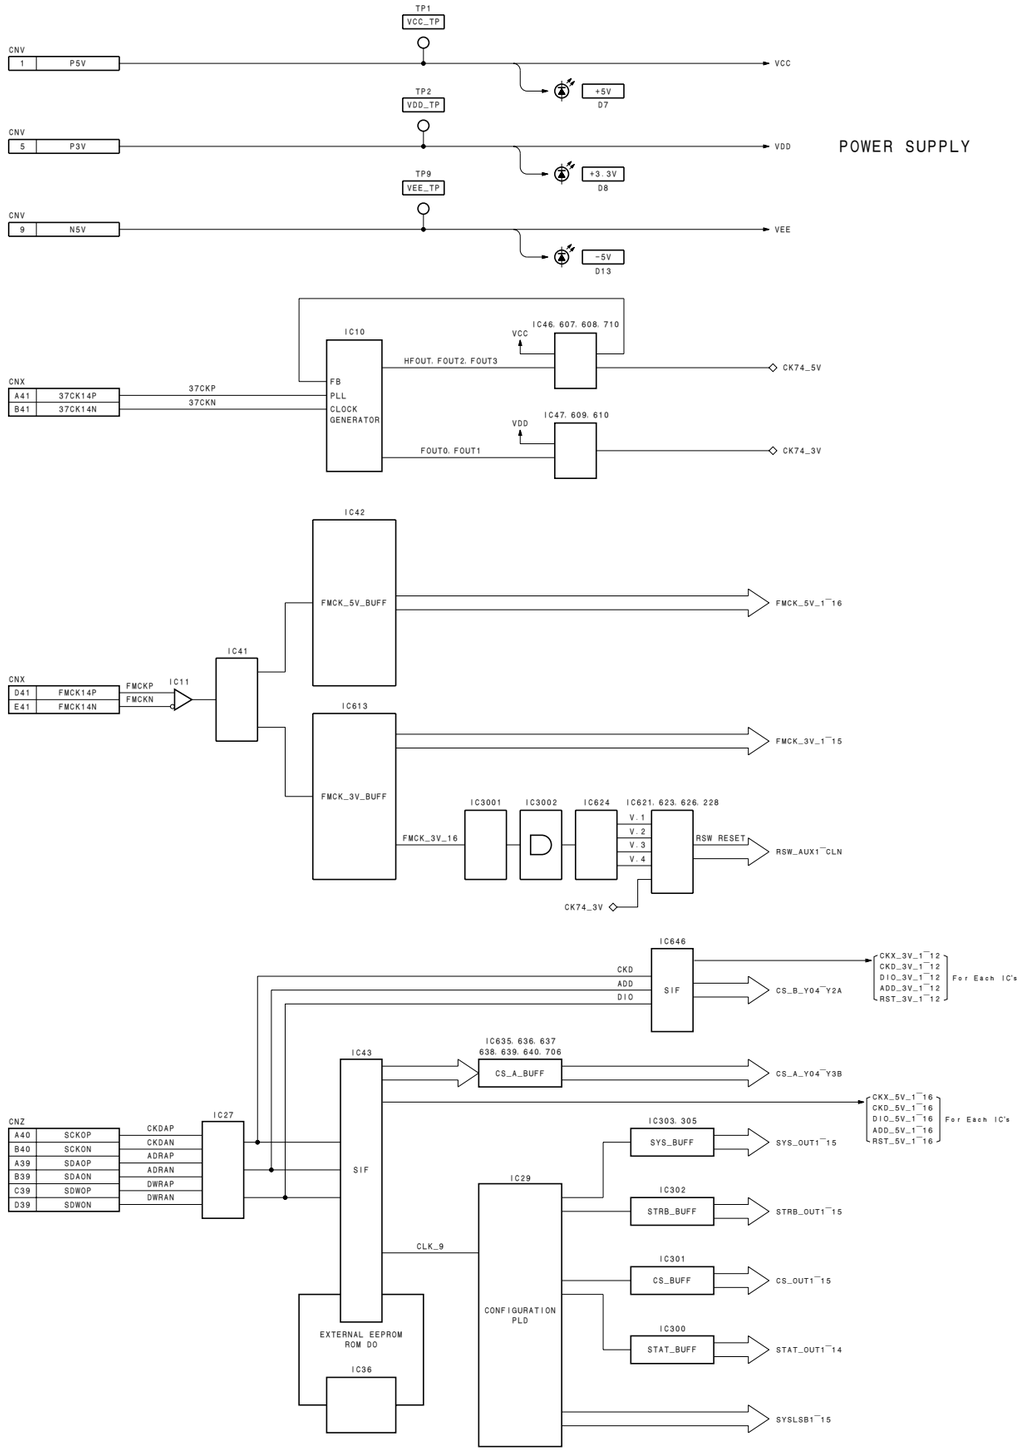

Output Board
OUT-7/OUT-20 (1/3)

OUT-7/OUT-20 (2/3) Block Diagram


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

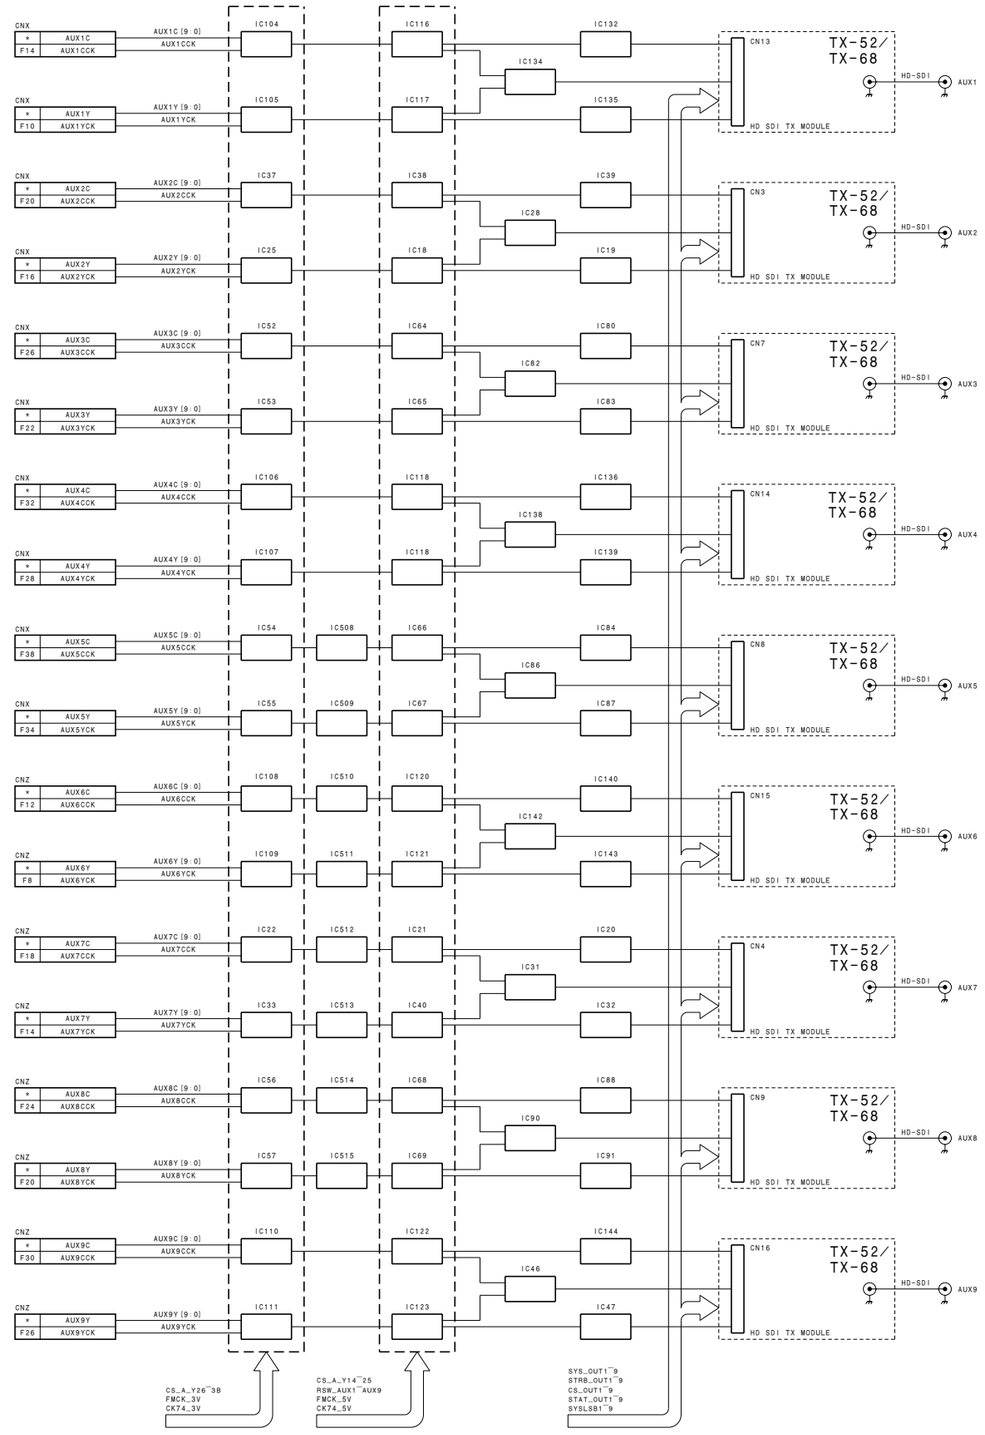

Output Board
OUT-7/OUT-20 (2/3)

OUT-7/OUT-20 (3/3) Block Diagram

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

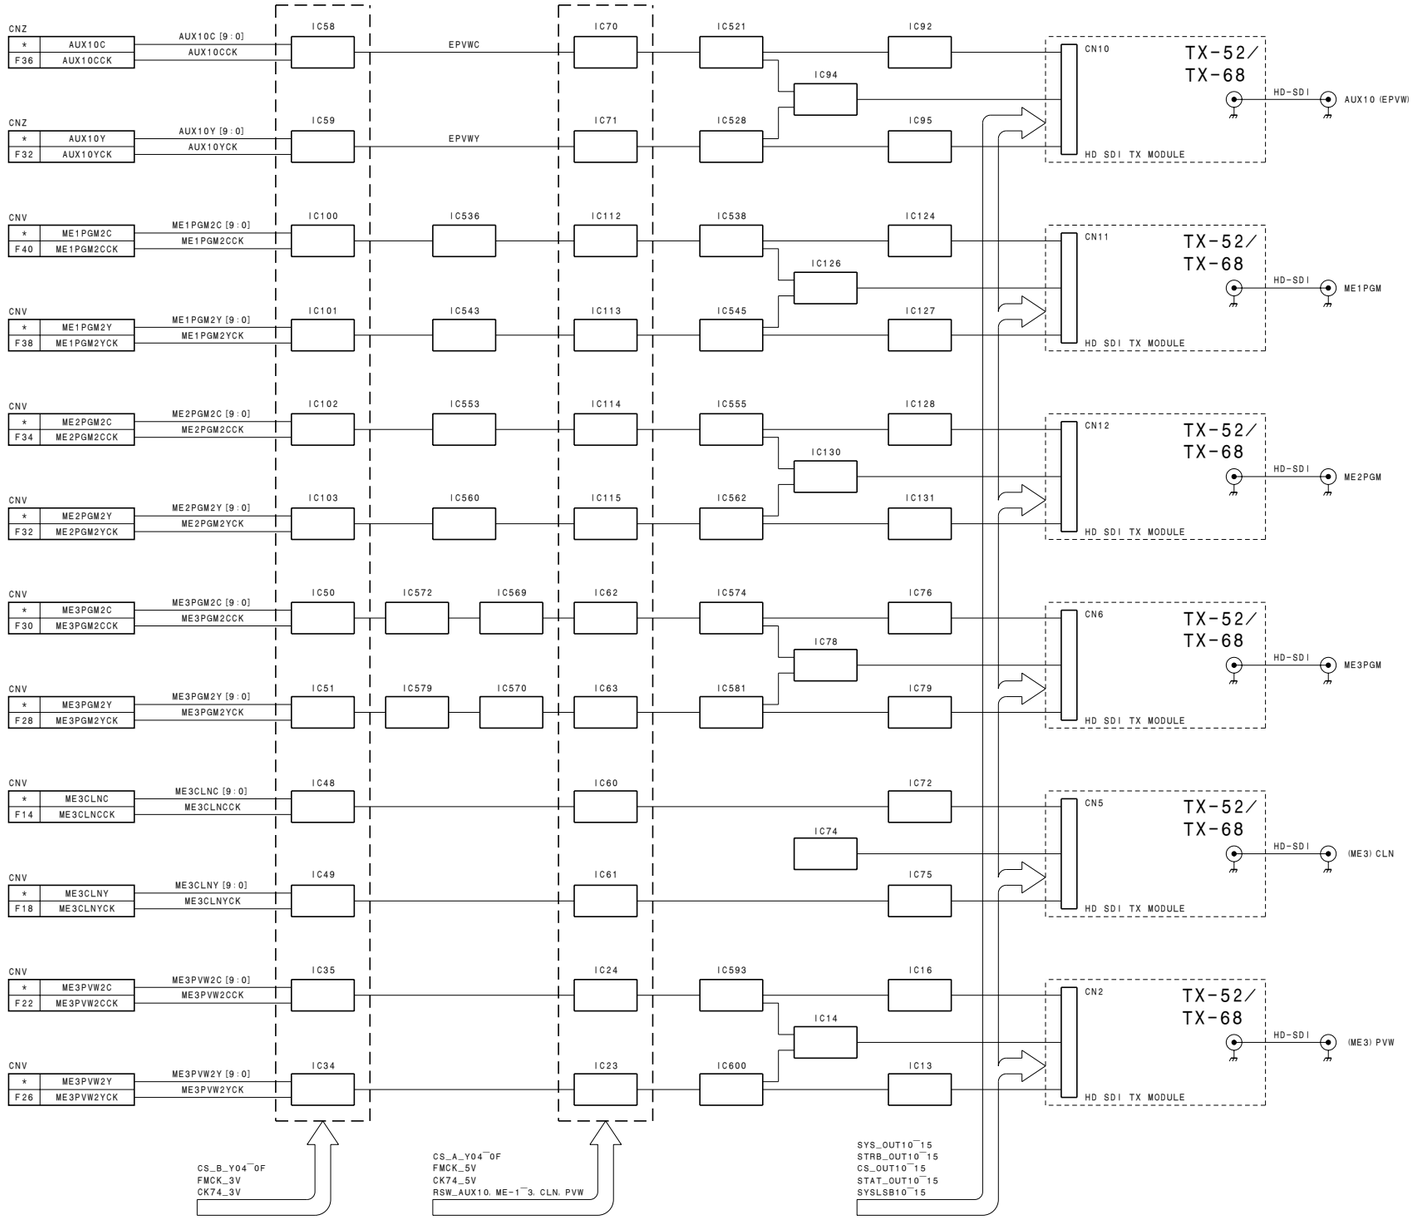


Output Board
OUT-7/OUT-20 (3/3)

DU-79, OUT-20 (1/3) Block Diagram (For 24P System)

5-2-10. DU-79, OUT-20 (For 24P System)

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

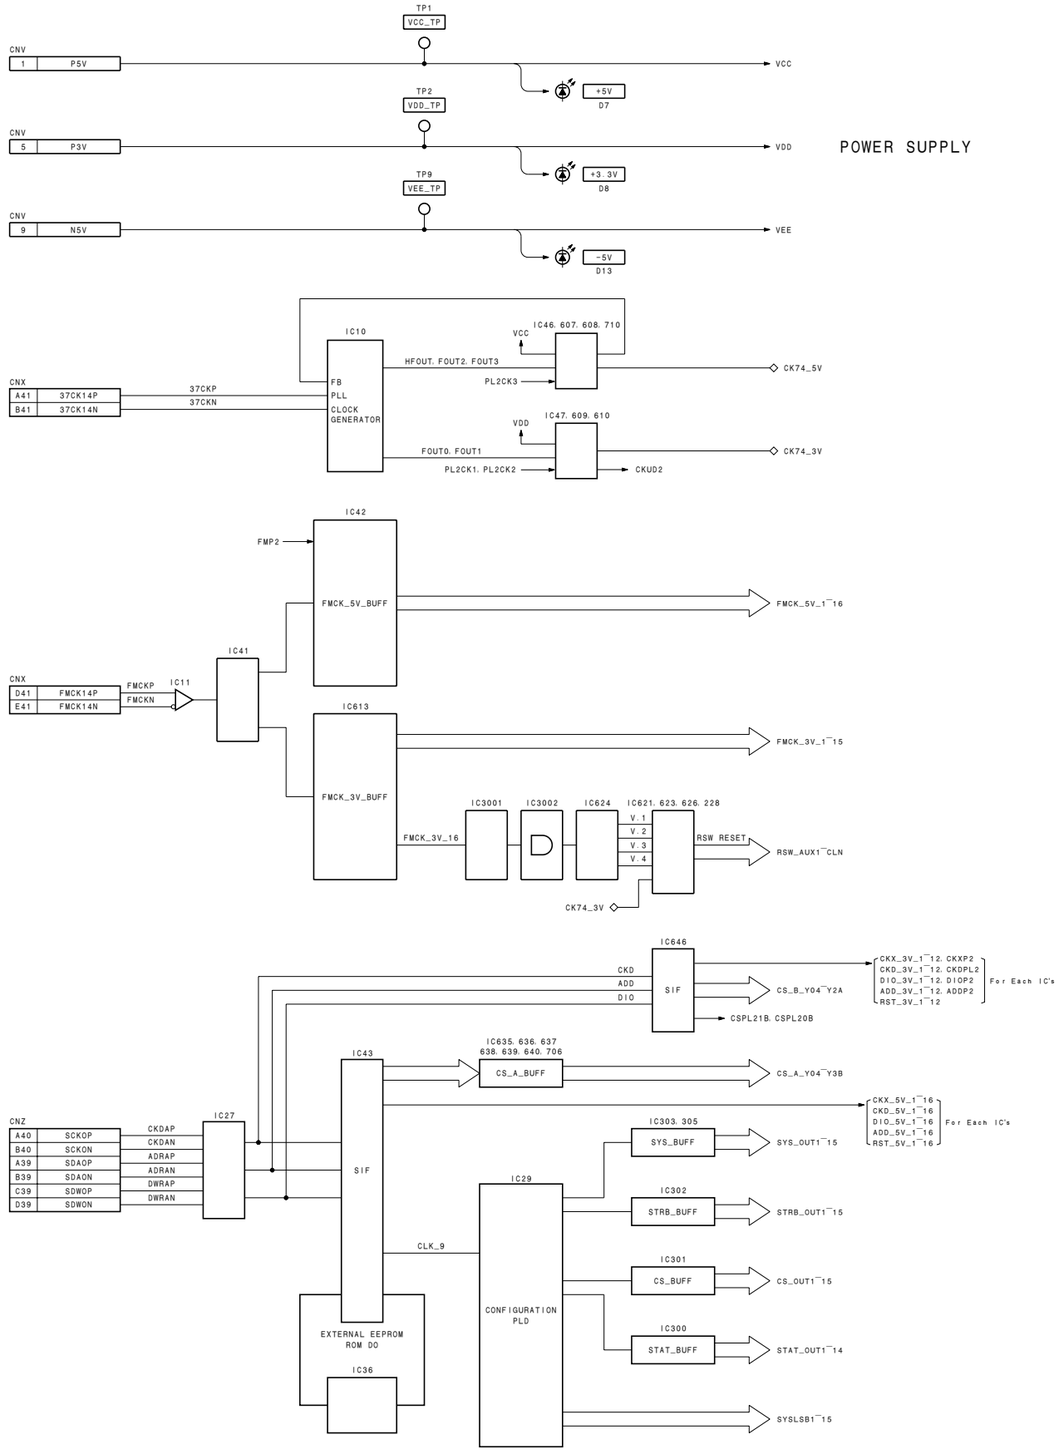


Clock Generator Board
DU-79 (1/3)


Output Board
OUT-20 (1/3)

5-27

DU-79, OUT-20 (2/3) Block Diagram (For 24P System)

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

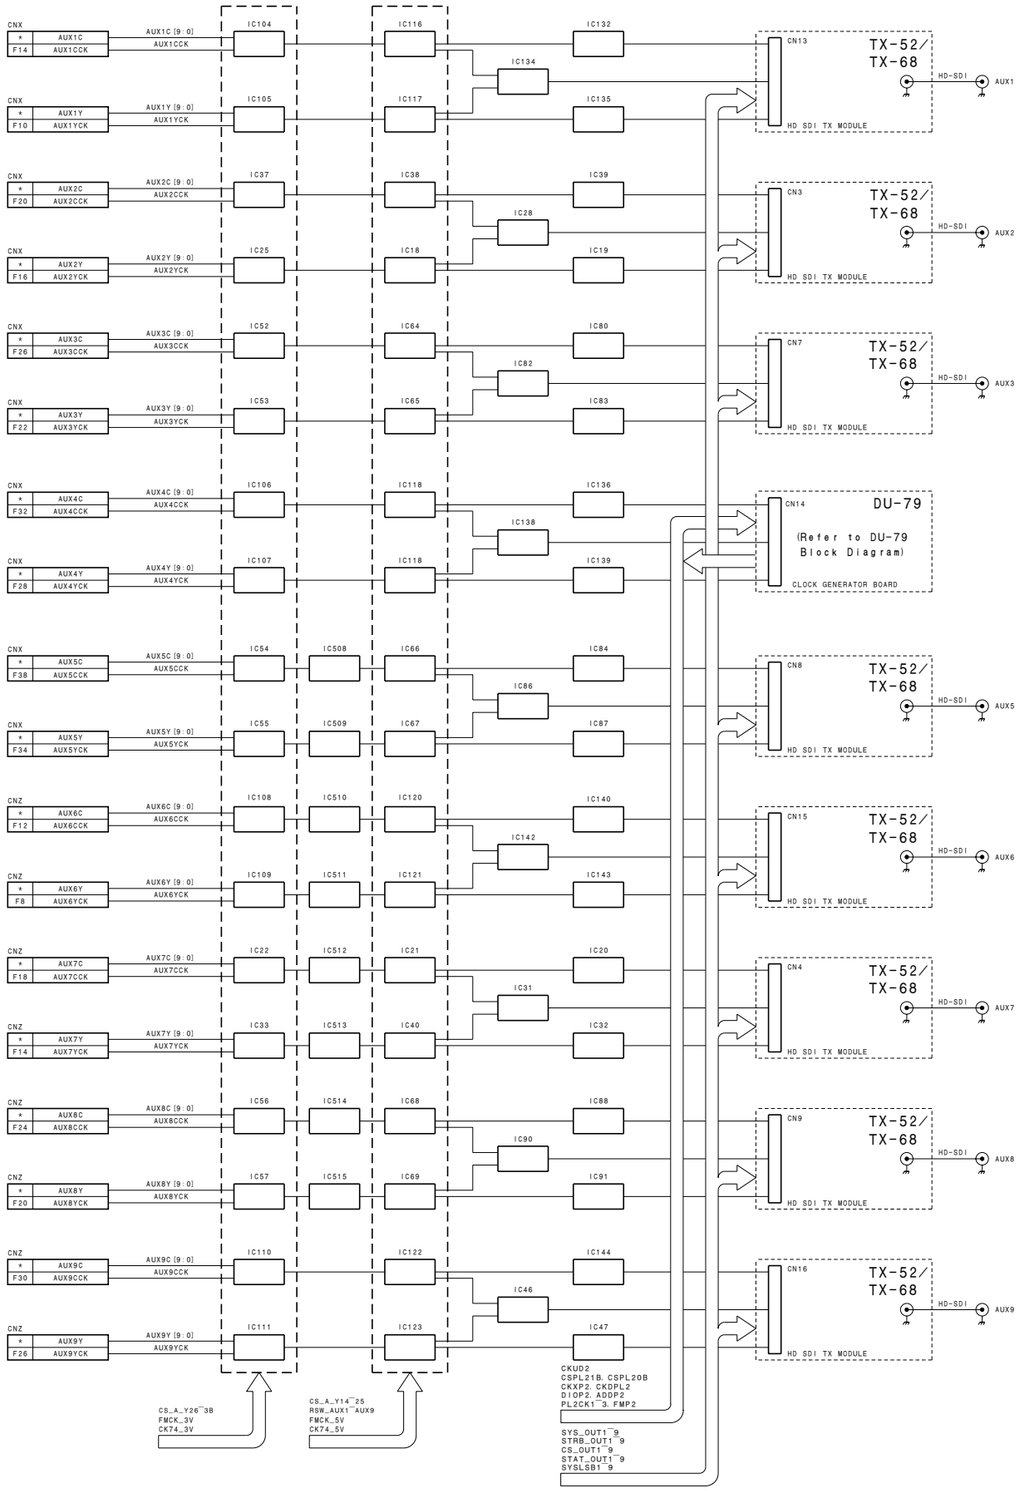

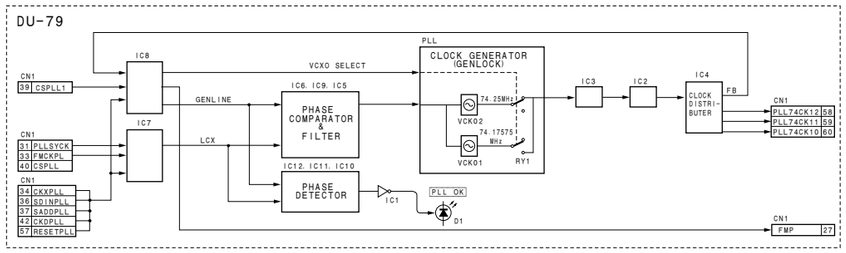


Clock Generator Board
DU-79 (2/3)

Output Board
OUT-20 (2/3)

DU-79, OUT-20 (3/3) Block Diagram (For 24P System)

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

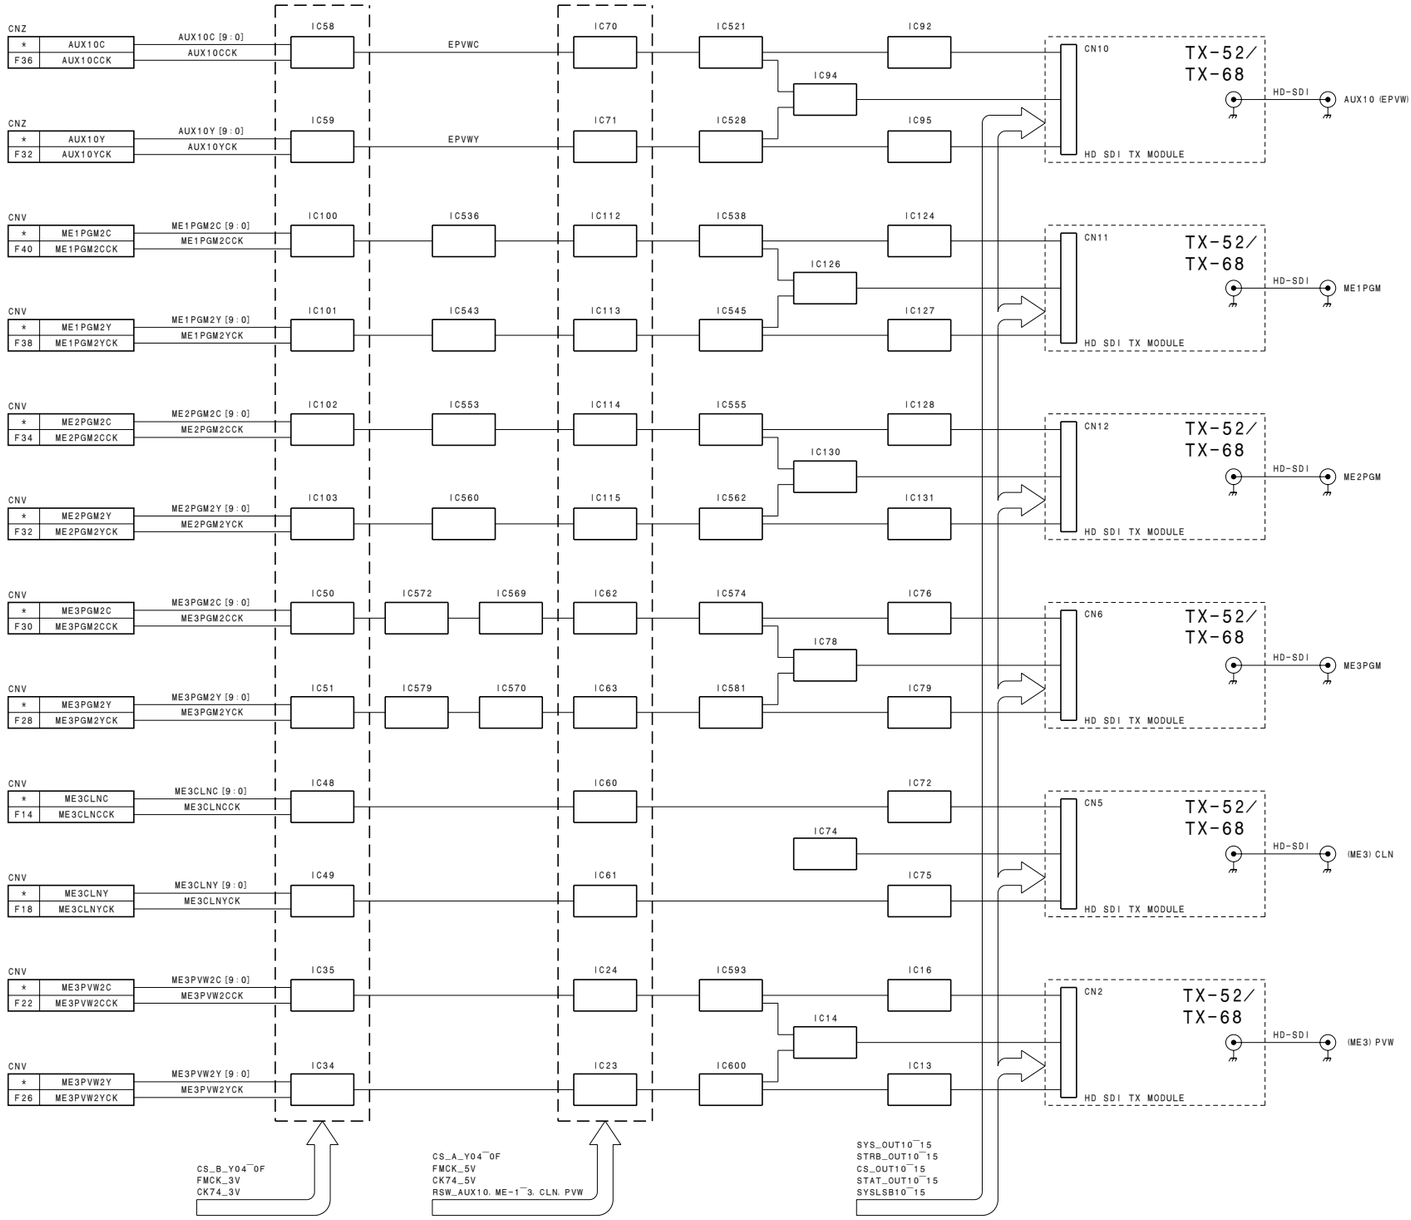


Clock Generator Board
DU-79 (3/3)

Output Board
OUT-20 (3/3)


5-2-11. VSW-33

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

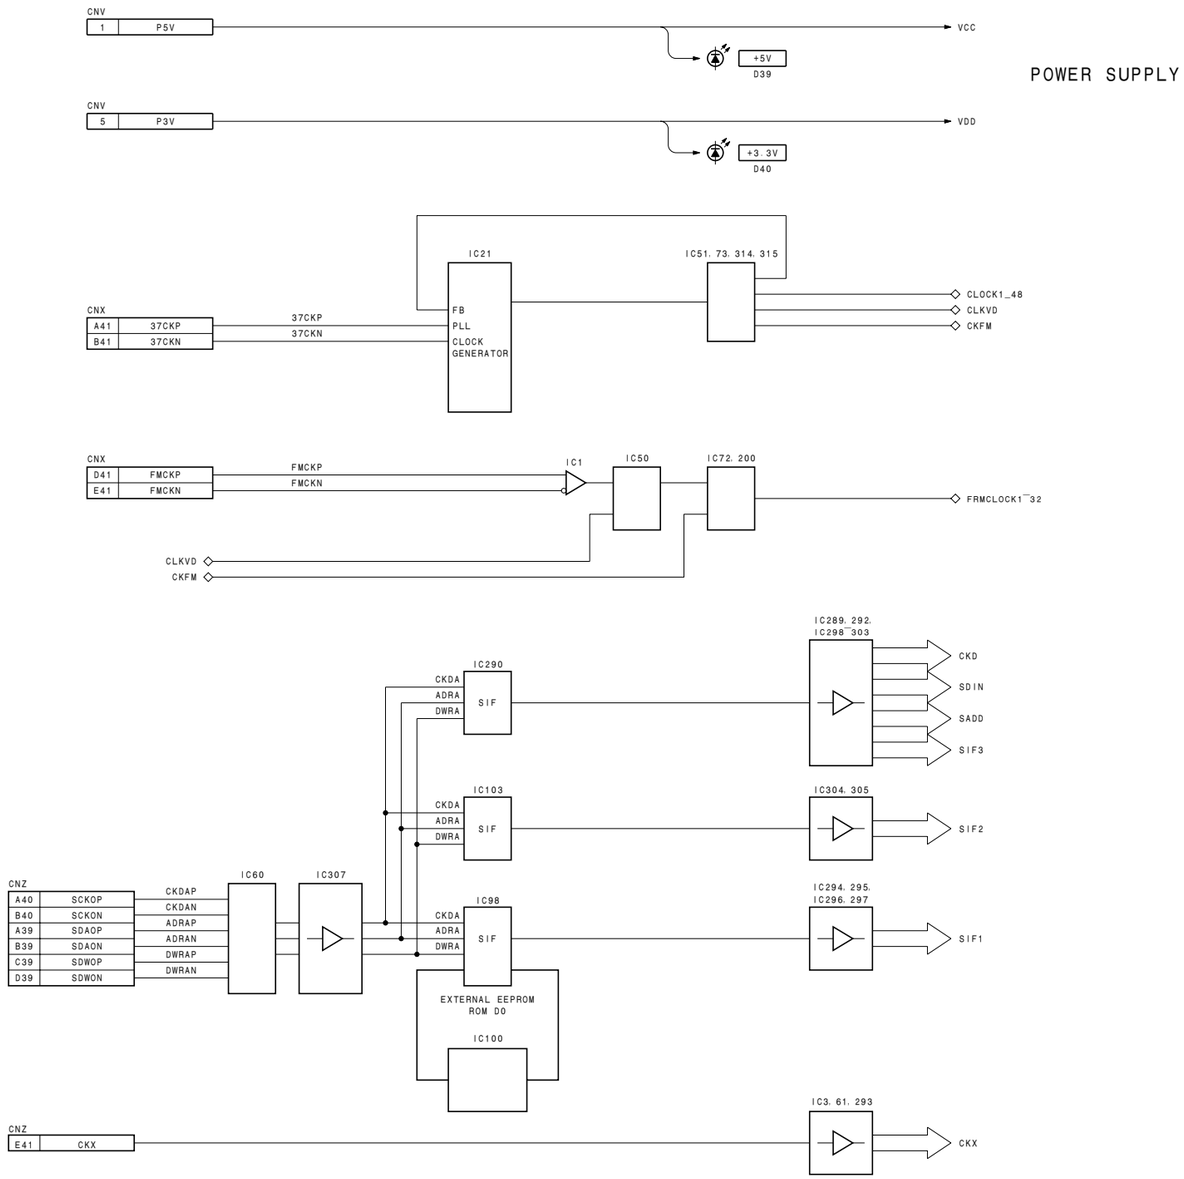

5-30

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

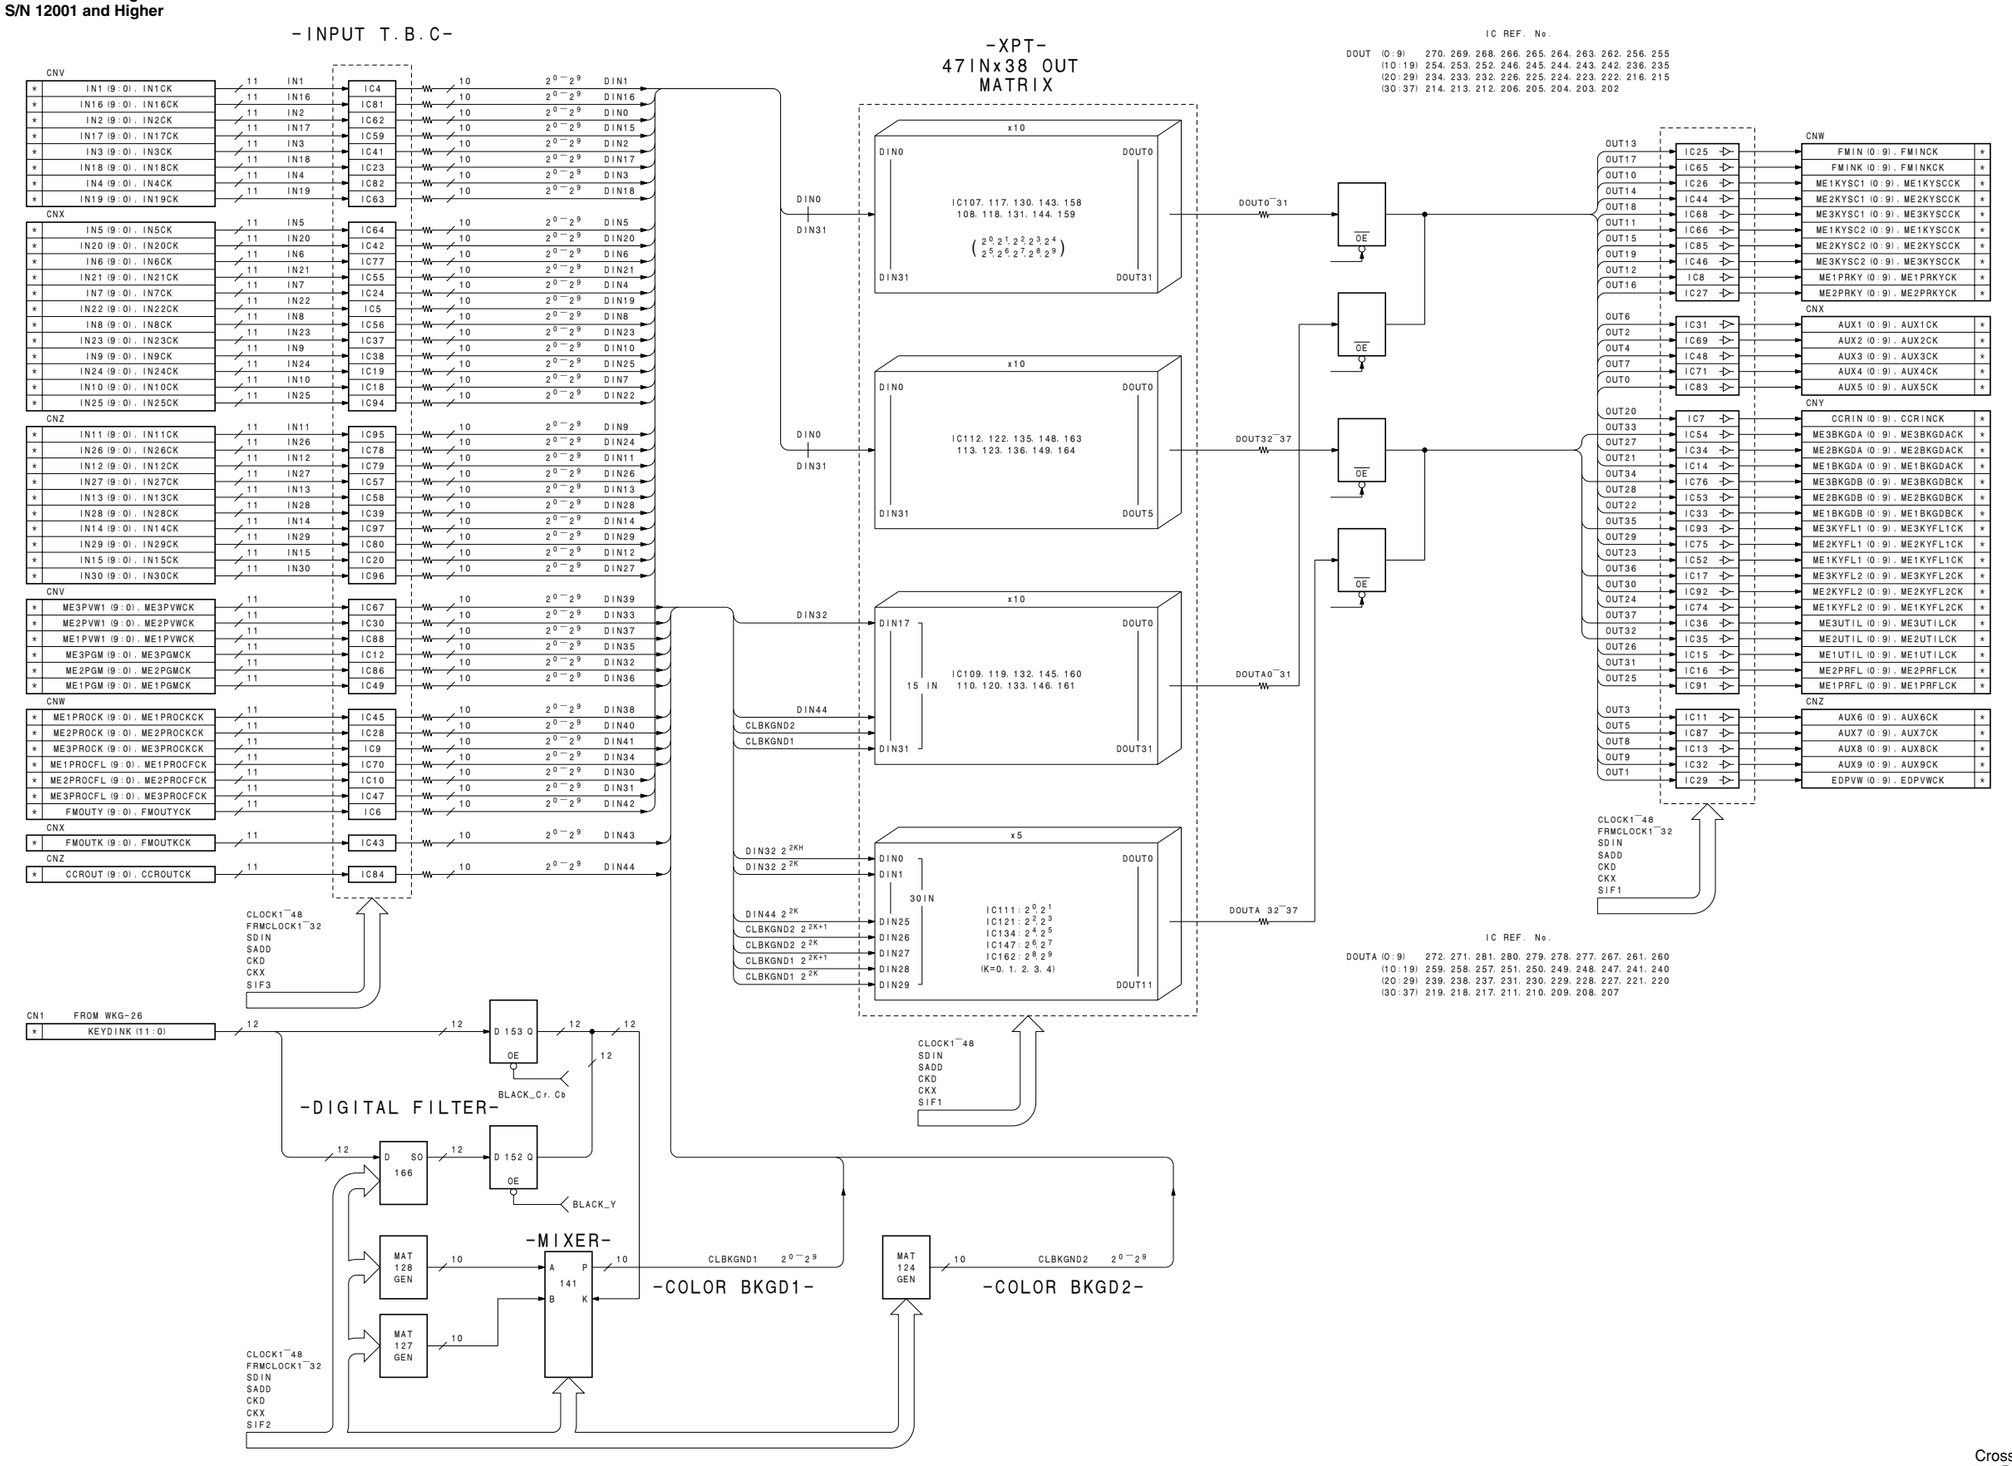



Crosspoint Board
VSW-33 (2/2)

WKG-25/WKG-29 Block Diagram

5-2-12. WKG-25/WKG-29

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

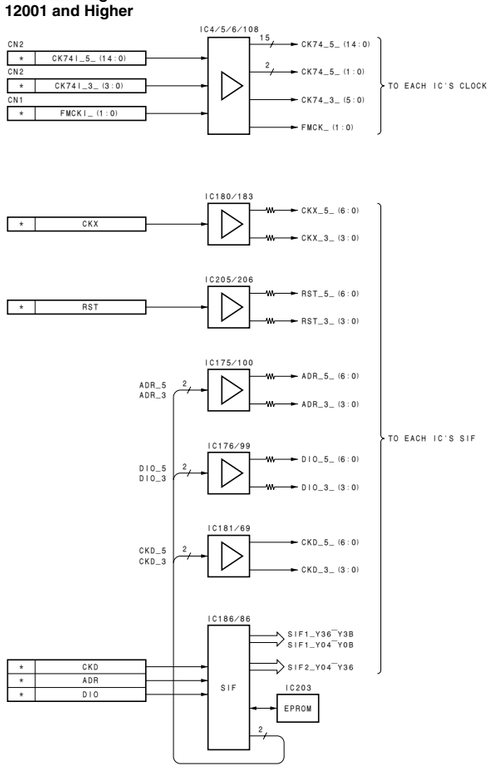


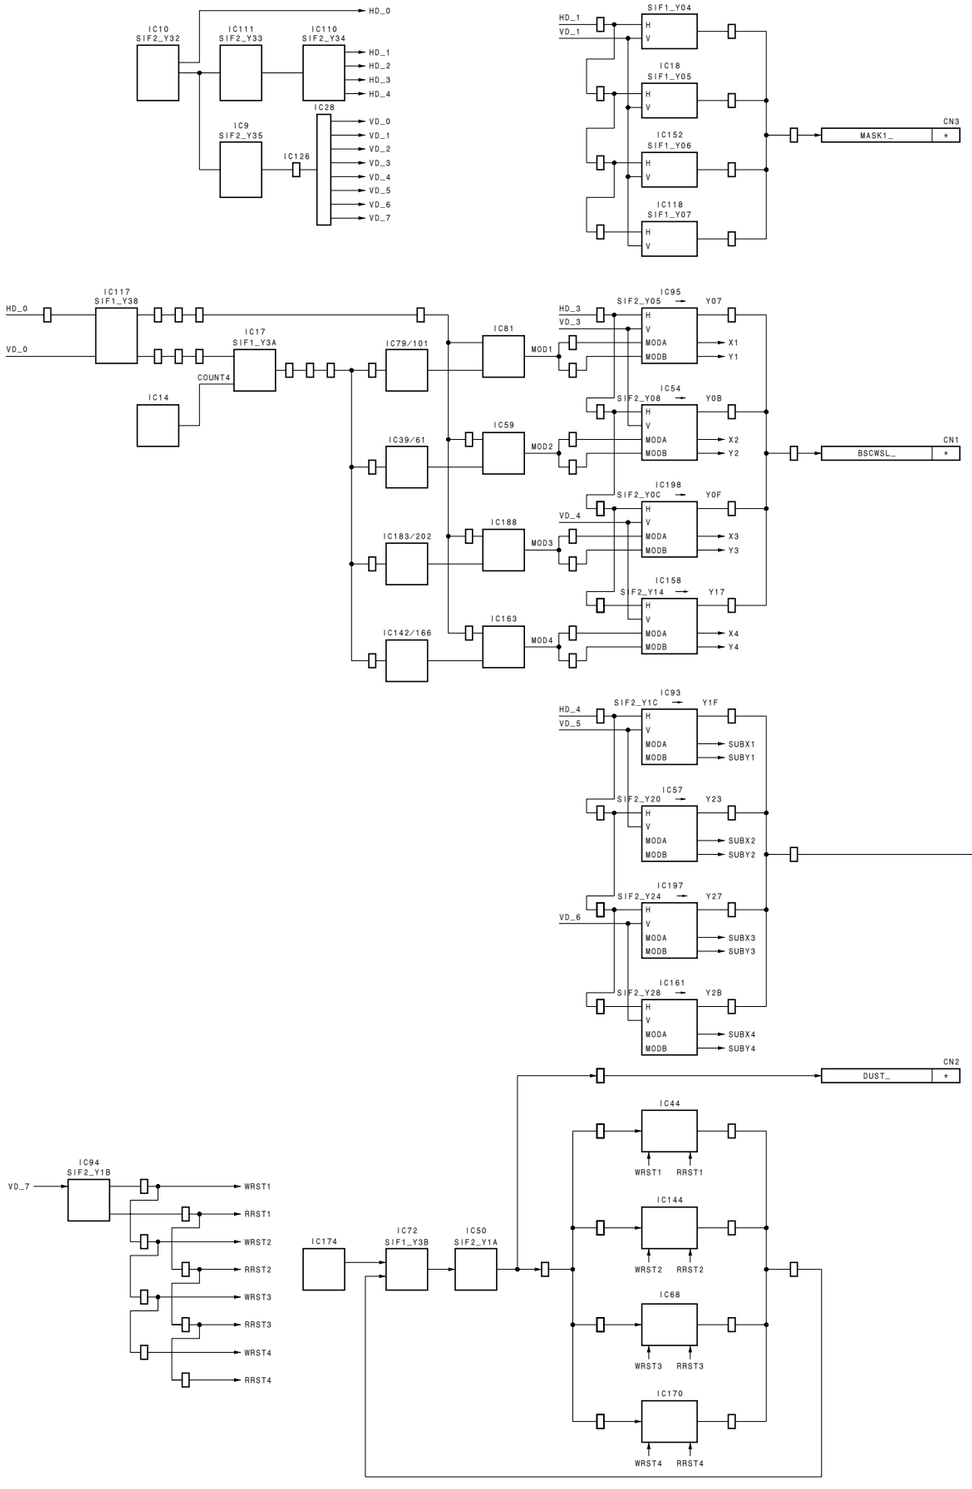

Wipe Generator Board
WKG-25/WKG-29

5-2-13. WKG-26

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

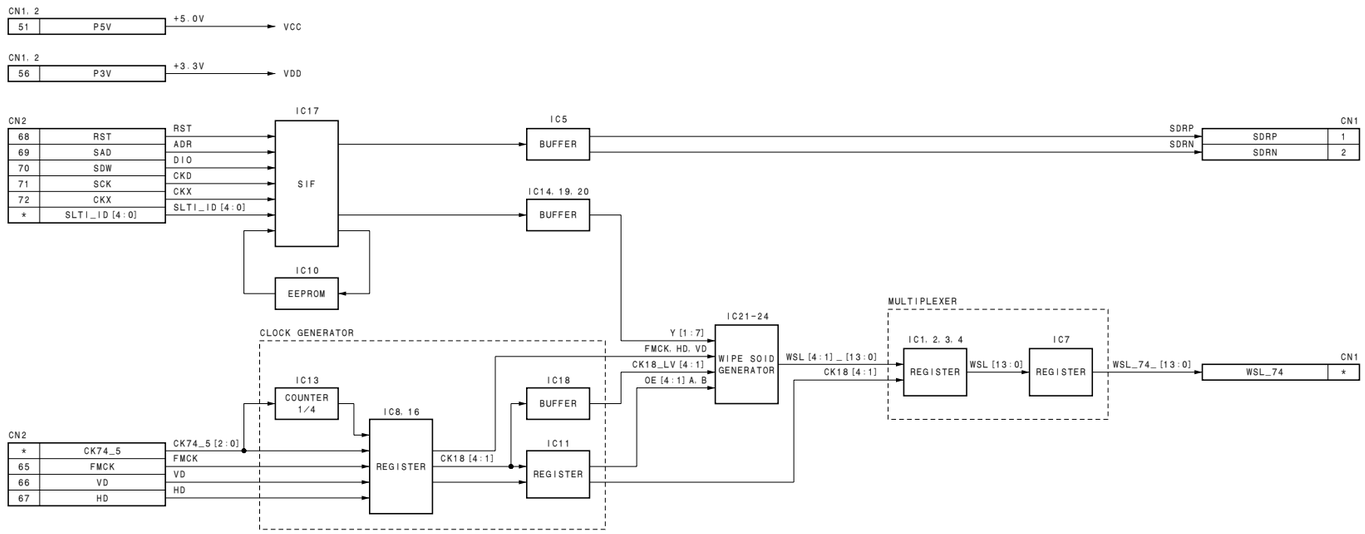


Wipe Generator Board
WKG-26

5-3. PC Board Block Diagrams/HKDS-7690A


5-3-1. RE-194

HKDS-7690A (SY) : S/N 10001 and Higher

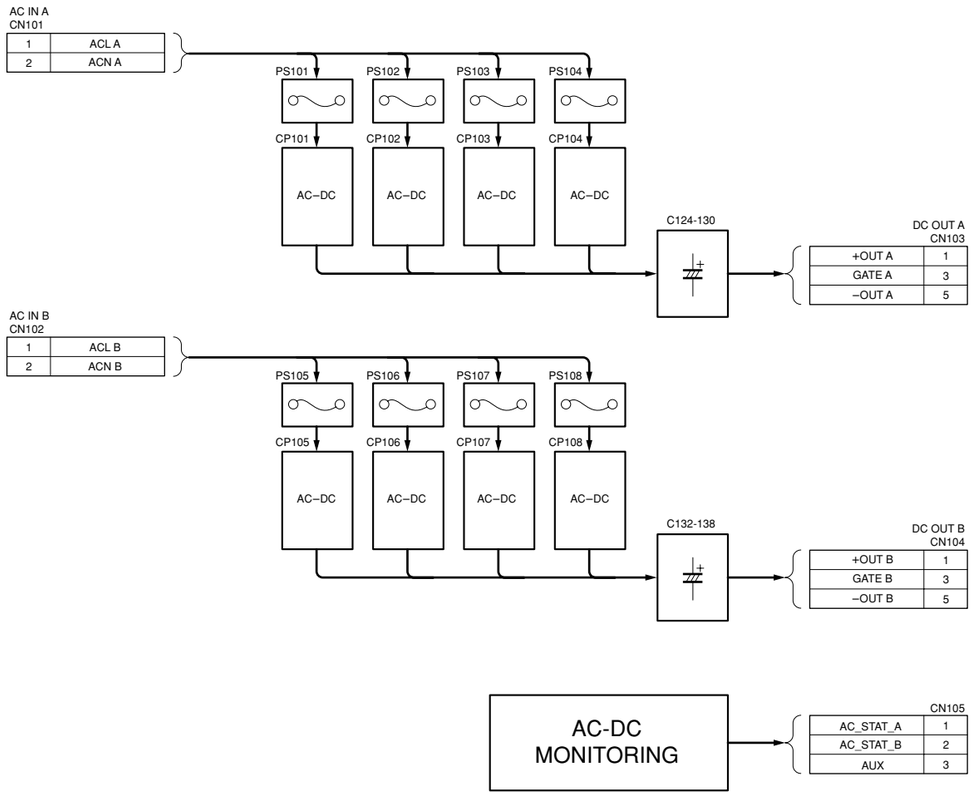

5-3-2. RE-196


HKDS-7690A (SY) : S/N 10001 and Higher

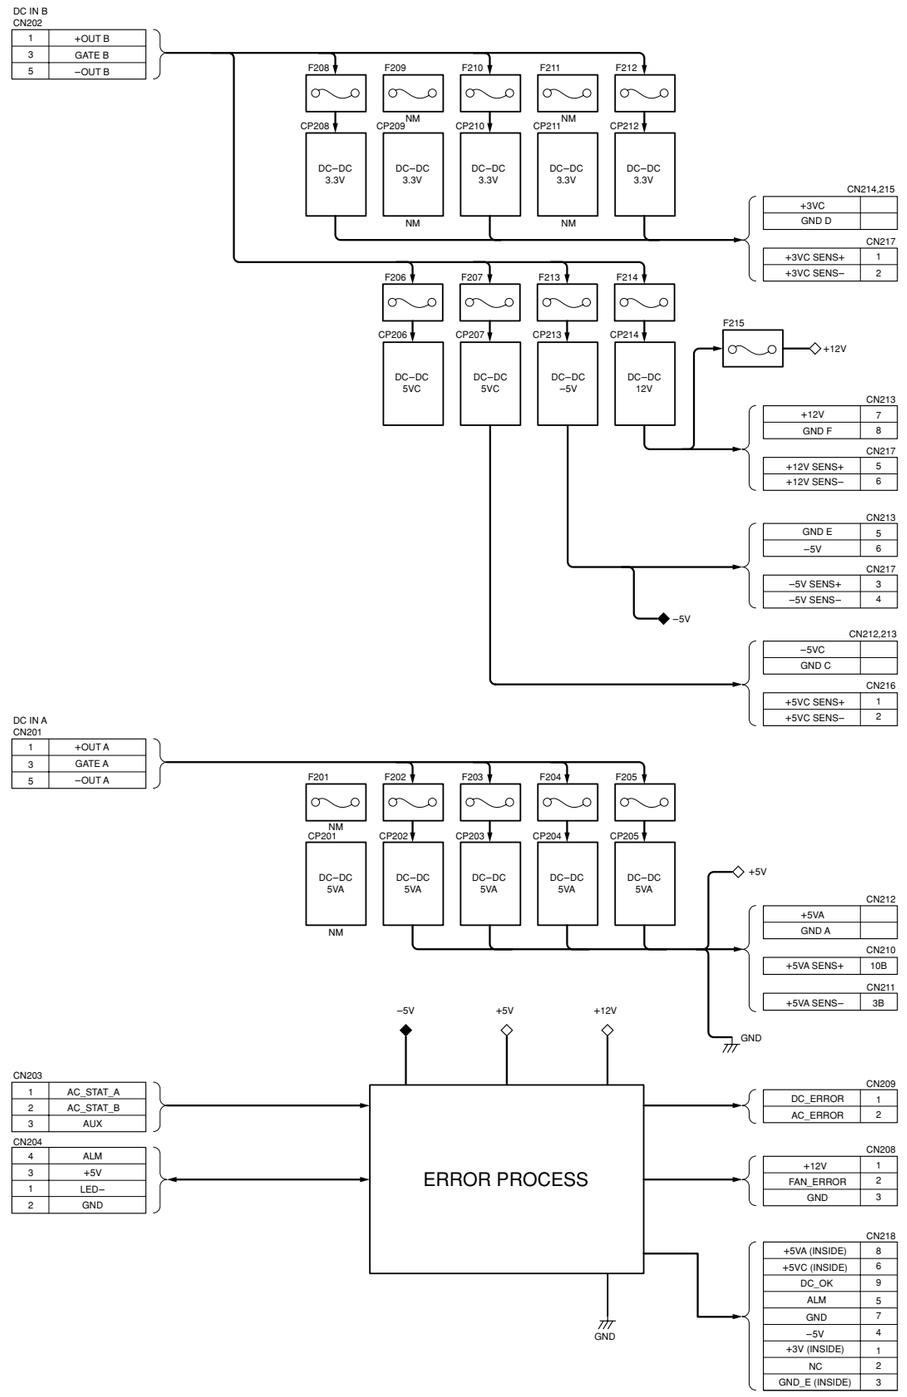

5-4. PC Board Block Diagram/HKDS-7031

5-4-1. CRK-9

HKDS-7031 (UCJ) : S/N 10001 and Higher,
S/N 11001 and Higher
HKDS-7031 (SY) : S/N 12001 and Higher

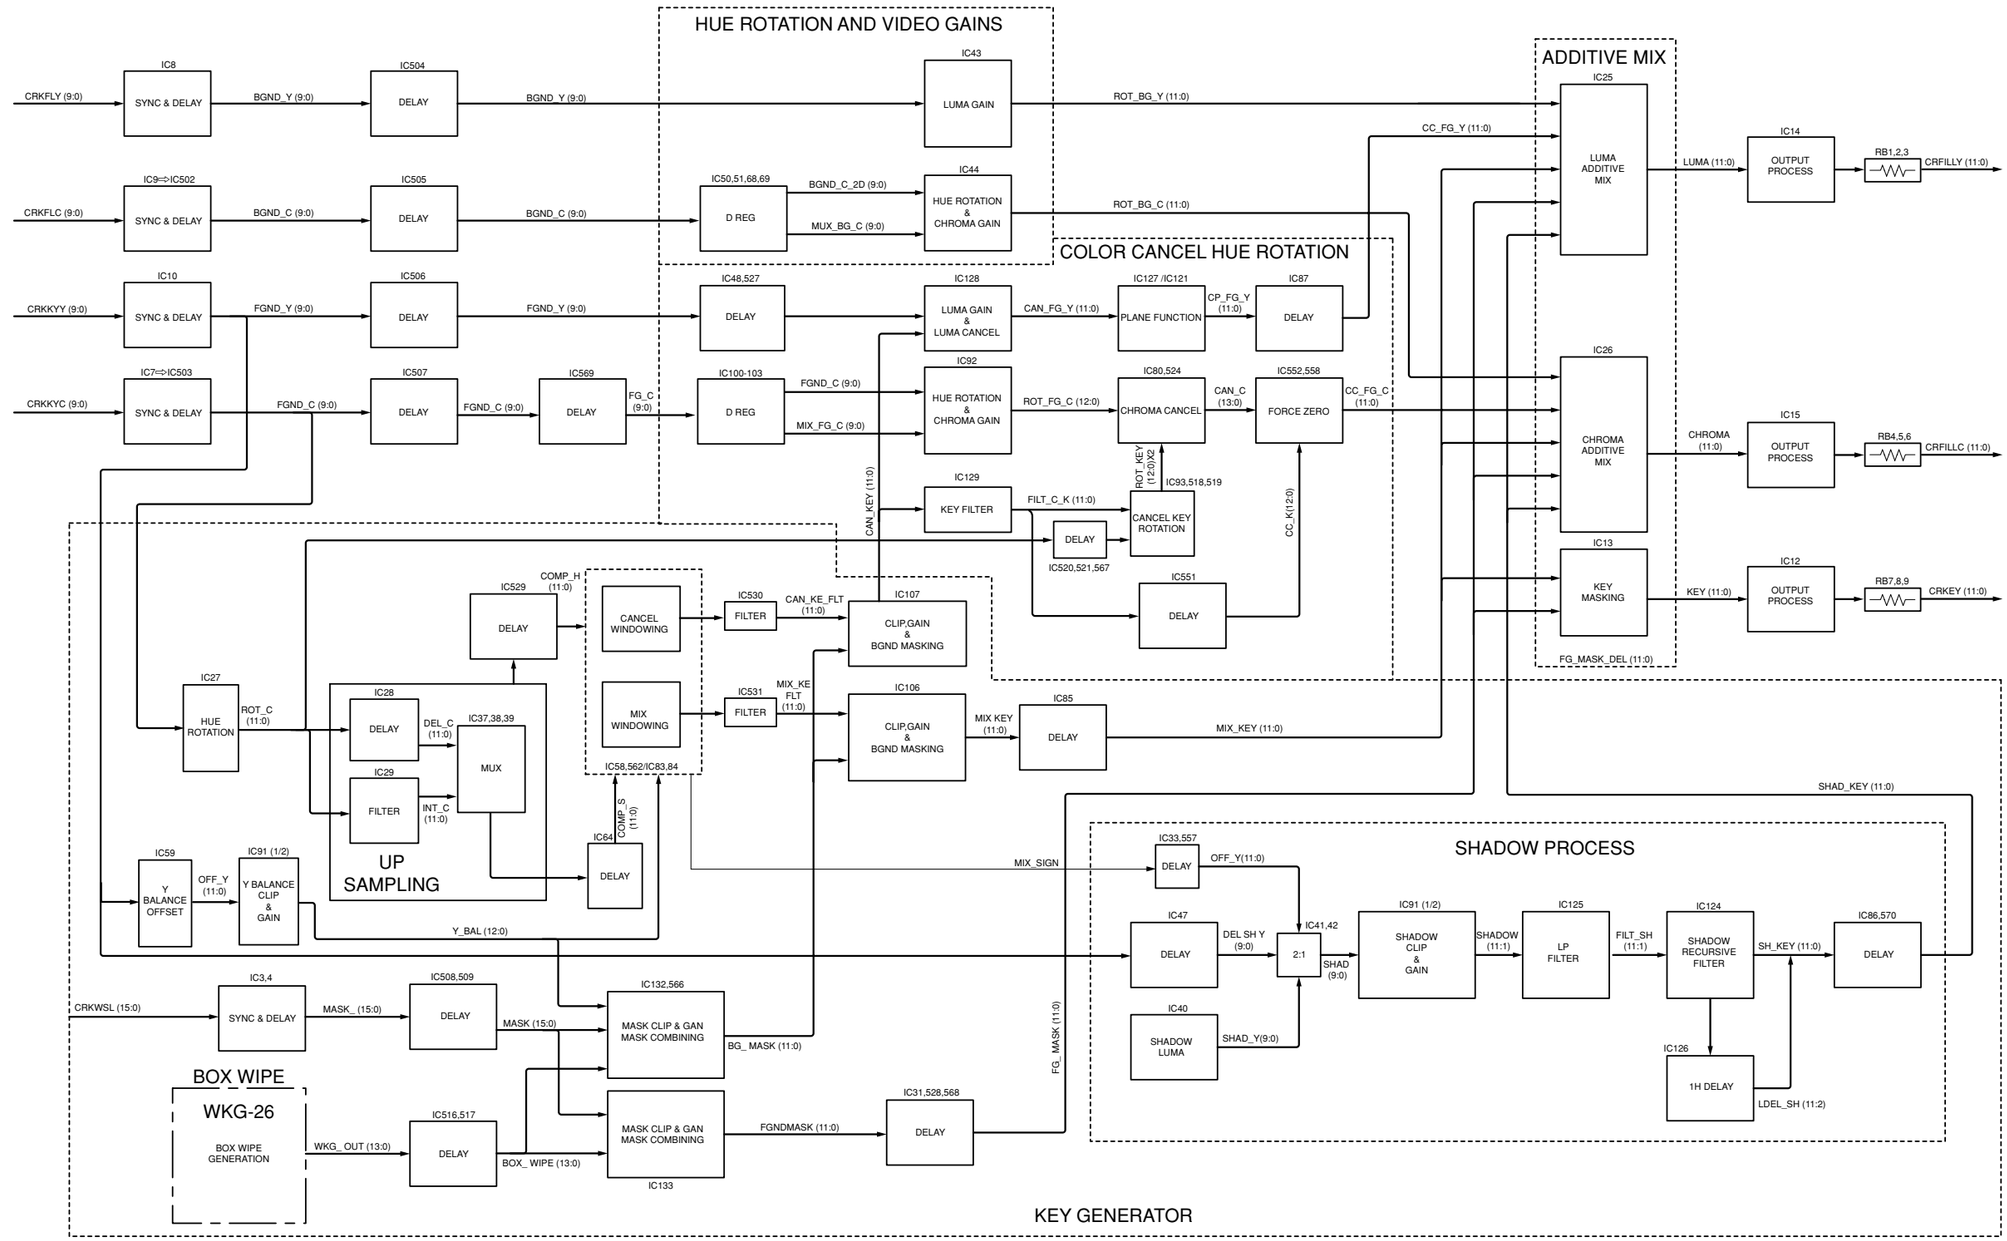


Chromakey Board
CRK-9

5-5. PC Board Block Diagram/HKDS-7041

5-5-1. MY-65

HKDS-7041 (UCJ) : S/N 10001 and Higher
HKDS-7041 (SY) : S/N 11001 and Higher

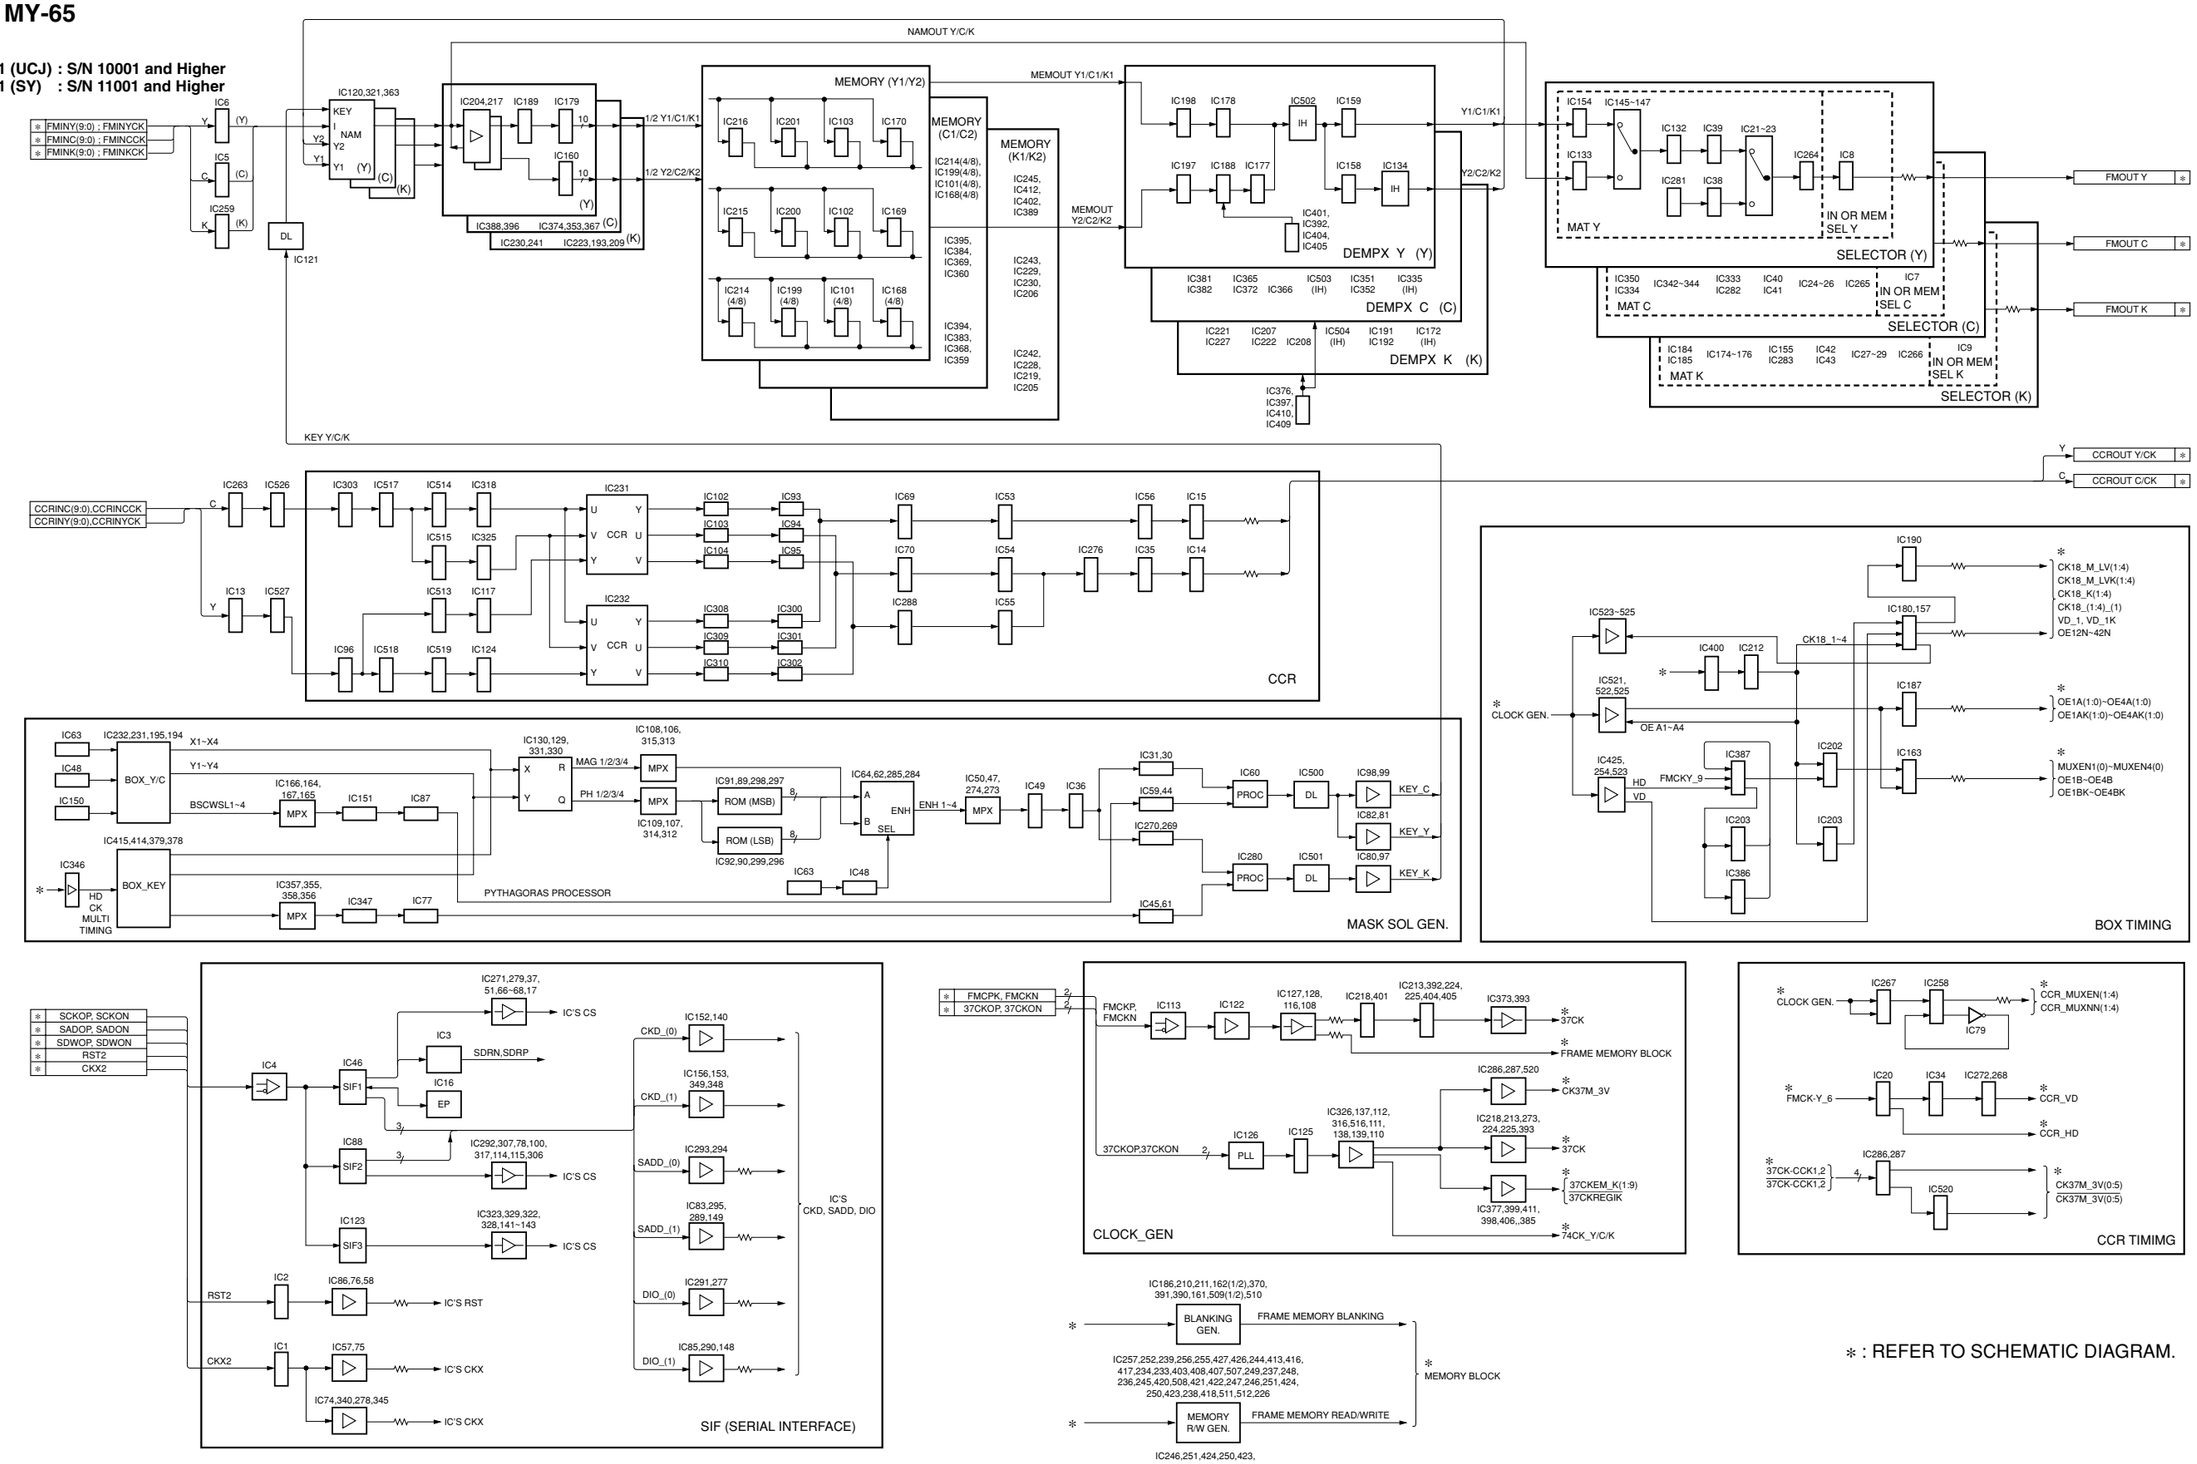

∗ : REFER TO SCHEMATIC DIAGRAM.

Frame Memory Board
MY-65


Section 6
Board Layouts

INDEX

Board name	Circuit function	Page
CKG-10	Clock generator board	6-2
CKG-29	Clock generator board	6-4
CN-1439	Connector board	6-6
CN-1539	Connector board	6-9
CN-1700	Connector board	6-9
CN-1701	Connector board	6-9
CPU-183	CPU board	6-10
CRK-9 (HKDS-7031)	Chromakey board	6-12
DI-21	Input board	6-14
DI-37	Input board	6-16
DU-79	Clock generator board	6-9
IF-656	RS-422A IF board	6-19
KPC-3	Key processor board	6-20
KPC-15	Key processor board	6-22
MB-494	Mother board	6-24
MEM-87	Memory board	6-27
MEM-92	Memory board	6-27
MIX-13	Mixer board	6-28
MY-65 (HKDS-7041)	Frame memory board	6-30
OUT-7	Output board	6-32
OUT-20	HD SDI output board	6-34
VSW-33	Crosspoint board	6-36
WKG-25	Wipe generator board	6-38
WKG-26	Wipe generator board	6-41
WKG-29	Wipe generator board	6-42

∗ : The board layouts for the RE-194 board and RE-196 board are not included.

6-1

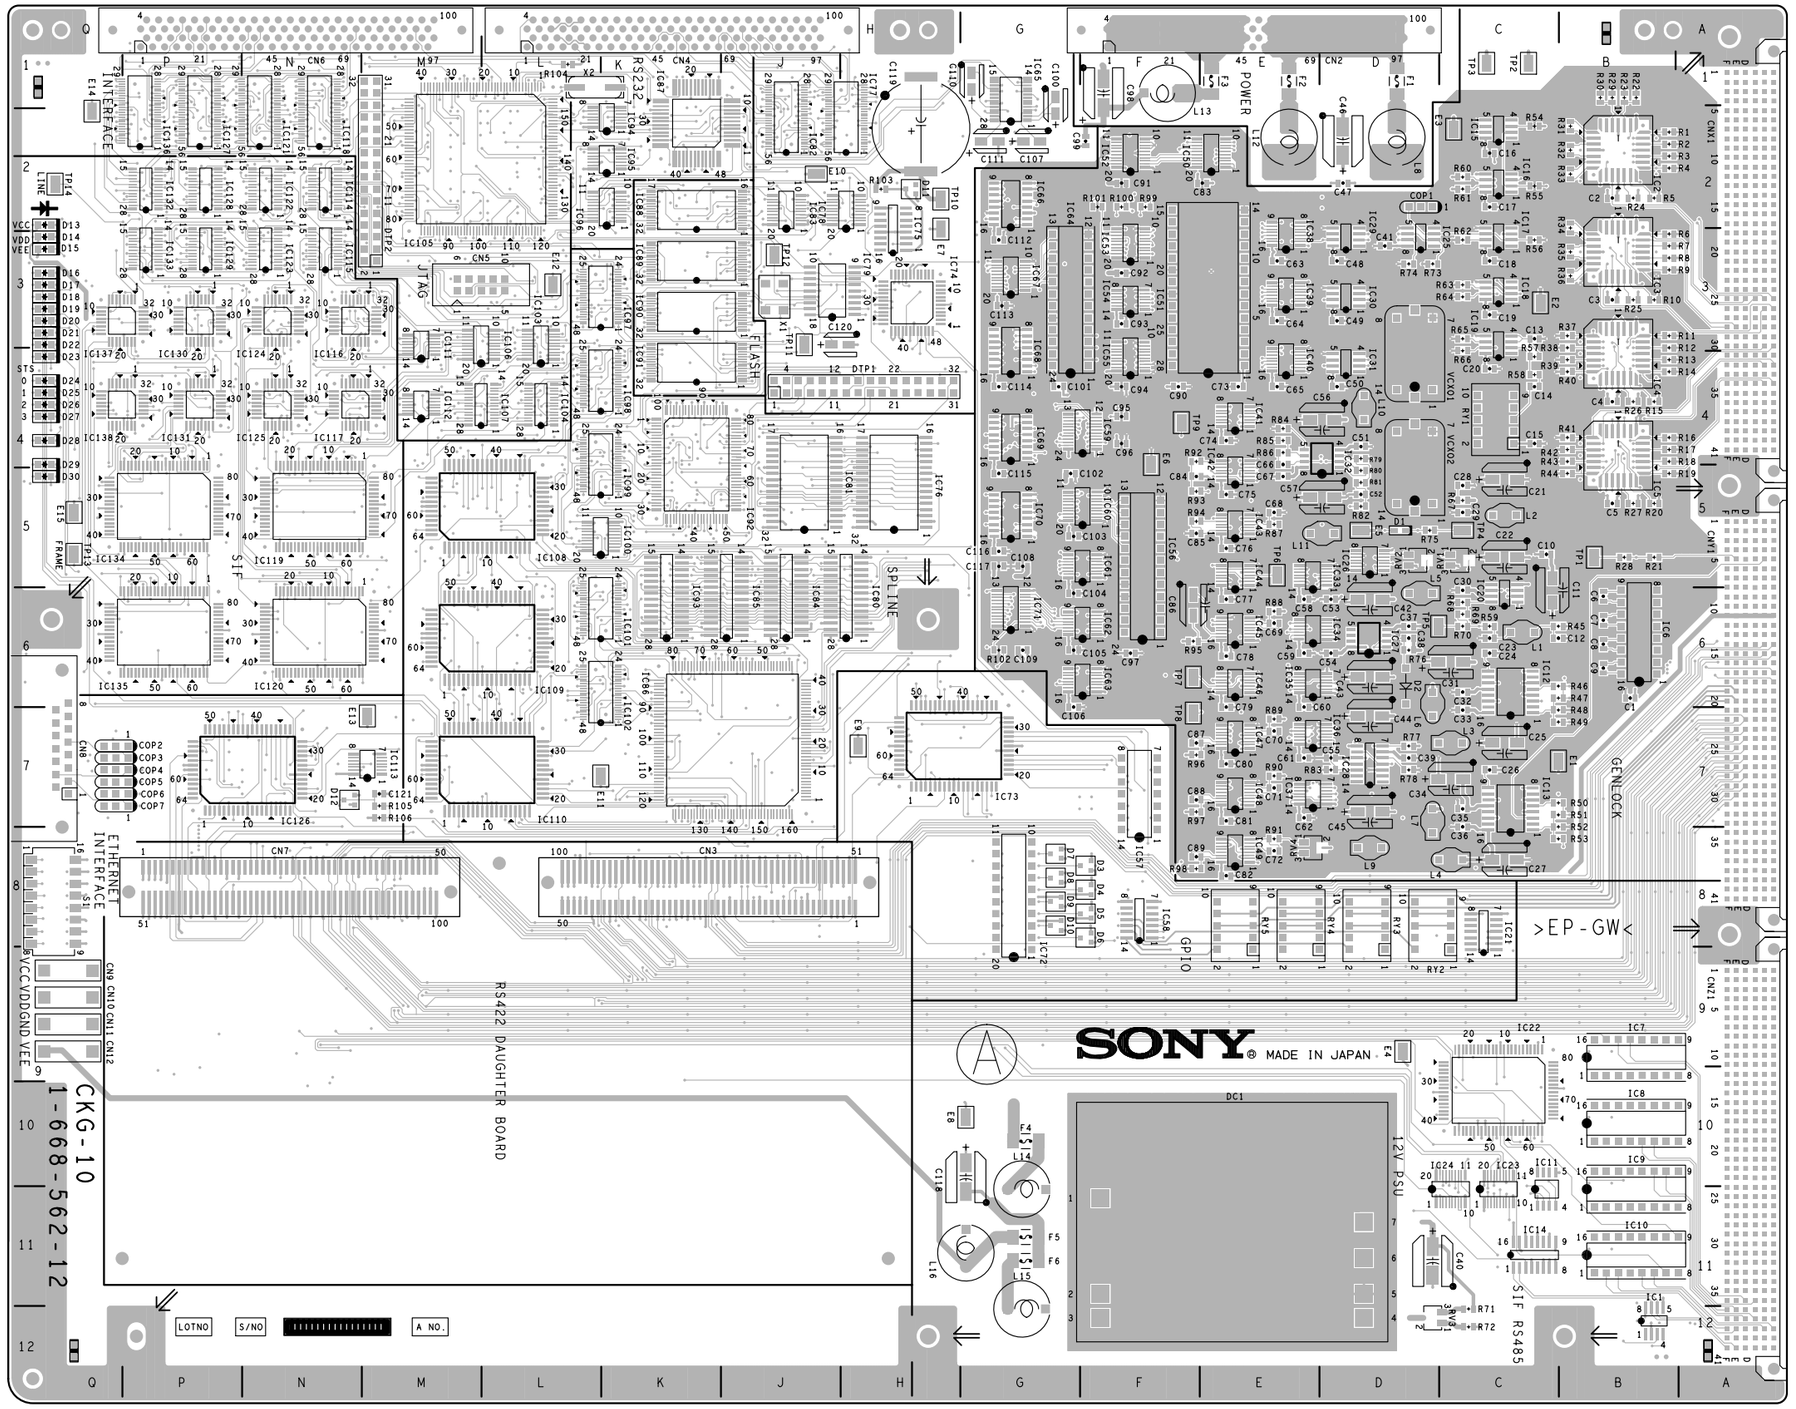


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher


CKG-10 -A SIDE-
SUFFIX: -12

CKG-10 (1-668-562-12)

CNX1	A1	F4	G10	IC89	K3	TP5	D6
		F5	G11	IC90	K3	TP6	E5
CNY1	A4	F6	G11	IC91	K4	TP7	F6
				IC92	K4	TP8	F7
CNZ1	A7	IC1	B12	IC93	K6	TP9	F4
		IC2	B2	IC94	K2	TP10	H2
CN2	F1	IC3	B3	IC95	K2	TP11	J3
CN3	K8	IC4	B4	IC96	K2	TP12	J3
CN4	L1	IC5	B4	IC97	K3	TP13	Q5
CN5	M3	IC6	B6	IC98	K4	TP14	Q2
CN6	P1	IC7	B10	IC99	K4		
CN7	N8	IC8	B10	IC100	K5	VCX1	D4
CN8	Q7	IC9	B11	IC101	K6	VCX2	D5
CN9	Q9	IC10	B11	IC102	K6		
CN10	Q9	IC11	C11	IC103	L3	X1	J3
CN11	Q9	IC12	C6	IC104	L4	X2	L1
CN12	Q9	IC13	C7	IC105	M2		
		IC14	C11	IC106	M3	*:B SIDE	
COP1	D2	IC15	C2	IC107	M4		
COP2	P7	IC16	C2	IC108	L5		
COP3	P7	IC17	C3	IC109	L6		
COP4	P7	IC18	C3	IC110	L7		
COP5	P7	IC19	C3	IC111	M3		
COP6	P7	IC20	C6	IC112	M4		
COP7	P7	IC21	C8	IC114	N2		
		IC22	C10	IC115	N3		
COR1	D2	IC23	C11	IC116	N3		
COR2	P7	IC24	C11	IC117	N4		
COR3	P7	IC25	D3	IC118	N2		
COR4	P7	IC26	D5	IC119	N5		
COR5	P7	IC27	D6	IC120	N6		
COR6	P7	IC28	D7	IC121	N2		
COR7	P7	IC29	D3	IC122	N2		
		IC30	D3	IC123	N3		
CP1		IC31	D4	IC124	N3		
		IC32	D5	IC125	N4		
D1	D5	IC33	E5	IC126	N7		
D2	D6	IC34	E6	IC127	P2		
D3	F8	IC35	E6	IC128	P2		
D4	F8	IC36	E7	IC129	P3		
D5	F8	IC37	E7	IC130	P3		
D6	F8	IC38	E3	IC131	P4		
D7	G8	IC39	E3	IC132	P2		
D8	G8	IC40	E4	IC133	P3		
D9	G8	IC41	E4	IC134	P5		
D10	G8	IC42	E5	IC135	P6		
D11	H2	IC43	E5	IC136	P2		
D12	N7	IC44	E5	IC137	Q3		
D13	Q2	IC45	E6	IC138	Q4		
D14	Q3	IC46	E6				
D15	Q3	IC47	E7	IS7	B10		
D16	Q3	IC48	E7	IS8	B10		
D17	Q3	IC49	E8	IS9	B11		
D18	Q3	IC50	E2	IS10	B11		
D19	Q3	IC51	E4	IS51	E4		
D20	Q3	IC52	F2	IS56	F6		
D21	Q3	IC53	F3	IS64	F4		
D22	Q3	IC54	F3				
D23	Q4	IC55	F4	L1	C6		
D24	Q4	IC56	F6	L2	C5		
D25	Q4	IC57	F8	L3	C7		
D26	Q4	IC58	F8	L4	D8		
D27	Q4	IC59	F4	L5	D6		
D28	Q4	IC60	F5	L6	D7		
D29	Q4	IC61	F5	L7	D7		
D30	Q5	IC62	F6	L8	D2		
		IC63	F6	L9	D8		
E1	C7	IC64	F4	L10	D4		
E2	C3	IC65	G1	L11	E5		
E3	C2	IC66	G2	L12	E2		
E4	D9	IC67	G3	L13	F1		
E5	D5	IC68	G3	L14	G11		
E6	F4	IC69	G4	L15	G12		
E7	H3	IC70	G5	L16	G11		
E8	G10	IC71	G6				
E9	H7	IC72	G9	RV1	C5		
E10	J2	IC73	H7	RV2	D5		
E11	K7	IC74	H3	RV3	D12		
E12	L3	IC75	H3	RV4	E8		
E13	M7	IC76	H5				
E14	Q2	IC77	H2	RY1	C4		
E15	Q5	IC78	H2	RY2	C9		
E16	*B9	IC79	J3	RY3	D9		
E17	*D7	IC80	H6	RY4	E9		
E18	*E3	IC81	J5	RY5	E9		
E19	*H3	IC82	J2				
E20	*M3	IC83	J2	S1	Q8		
E21	*N6	IC84	J6				
		IC85	J6	TP1	B5		
F1	D1	IC86	J7	TP2	C1		
F2	E1	IC87	K2	TP3	C1		
F3	E1	IC88	K2	TP4	C5		

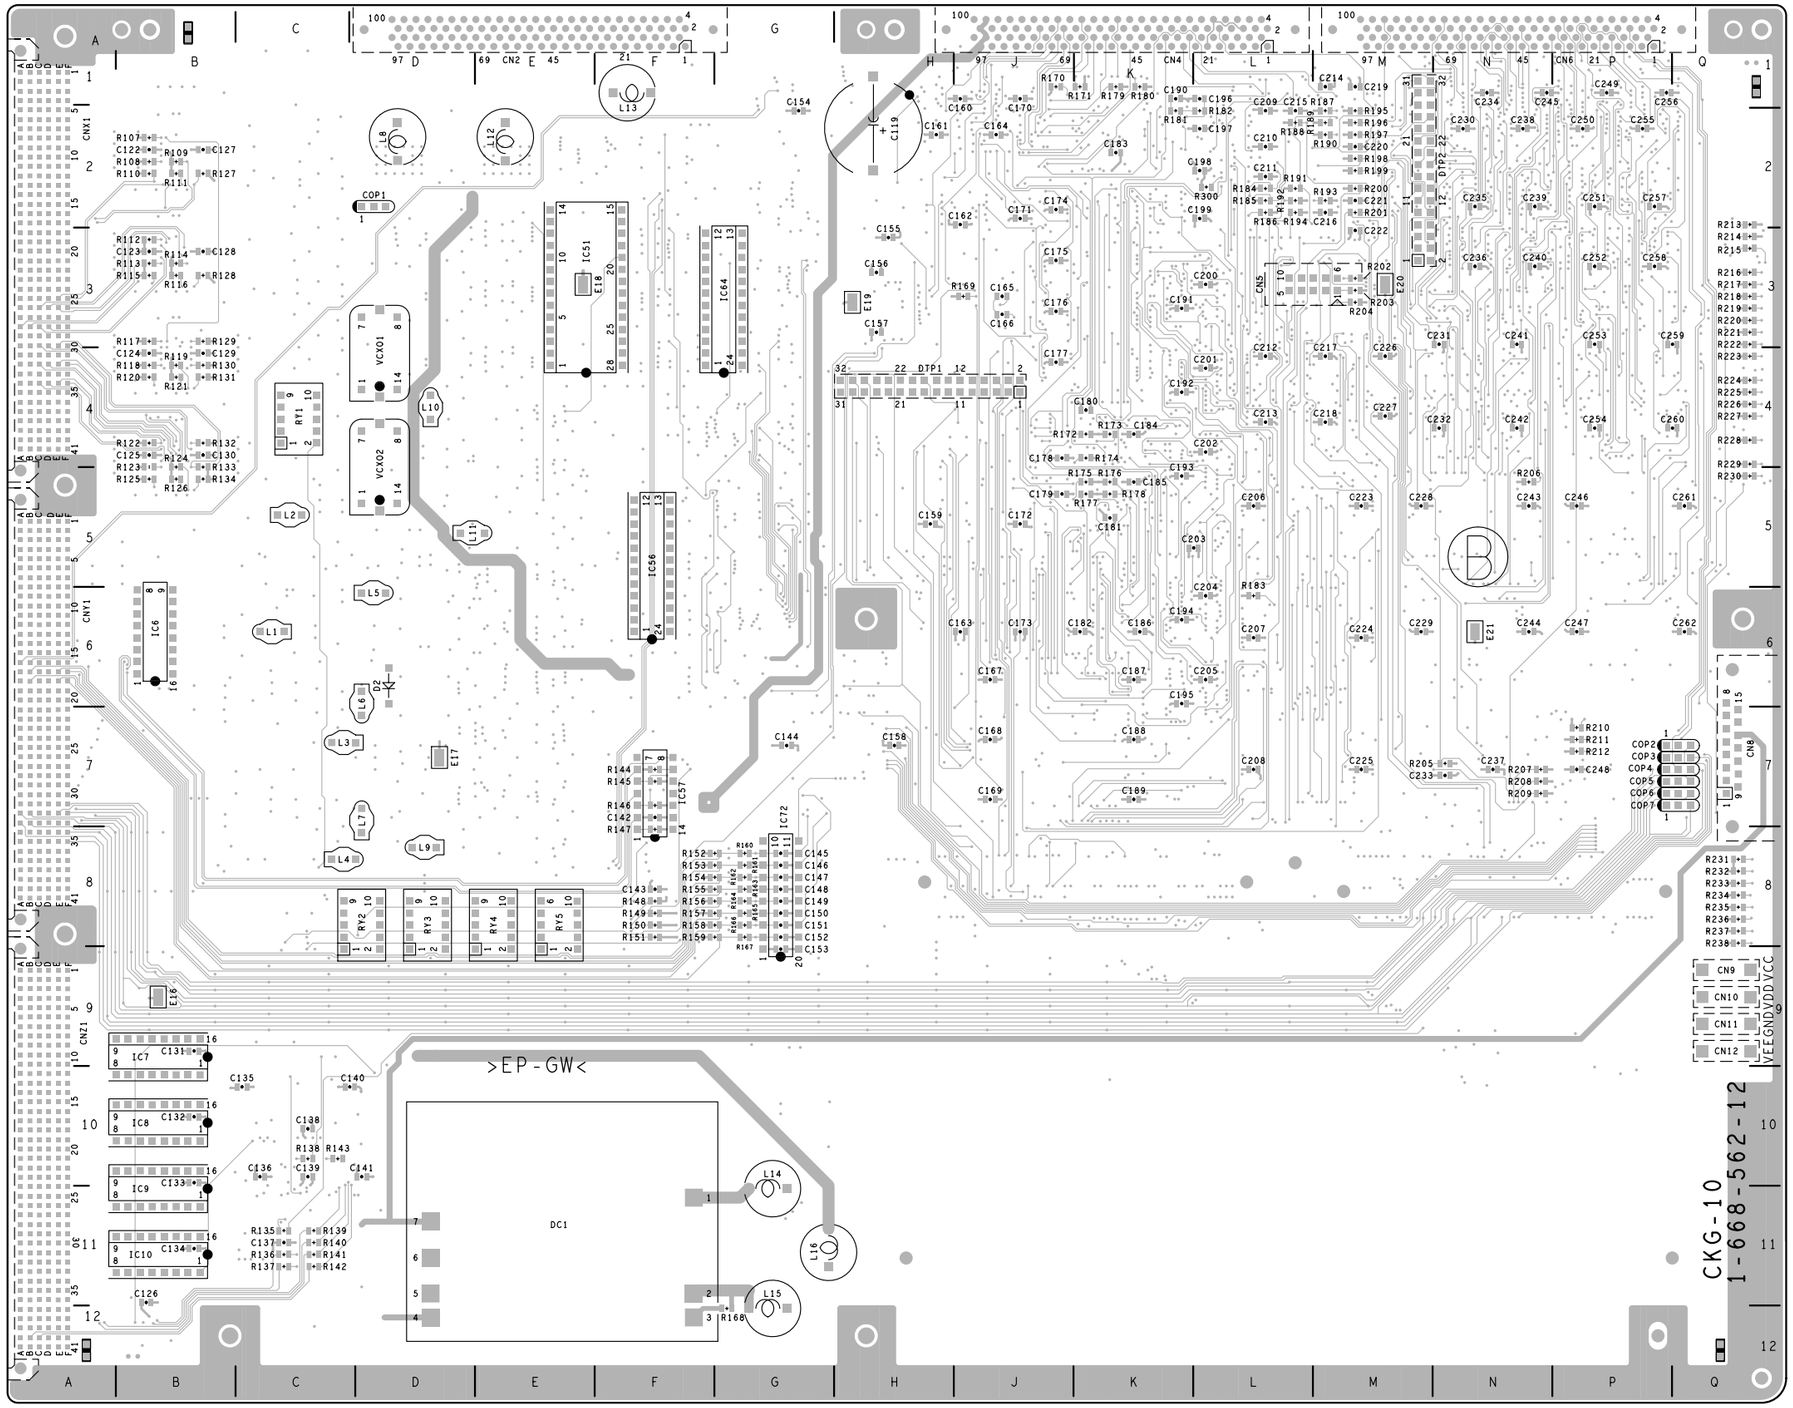

CKG-10 -B SIDE-
SUFFIX: -12

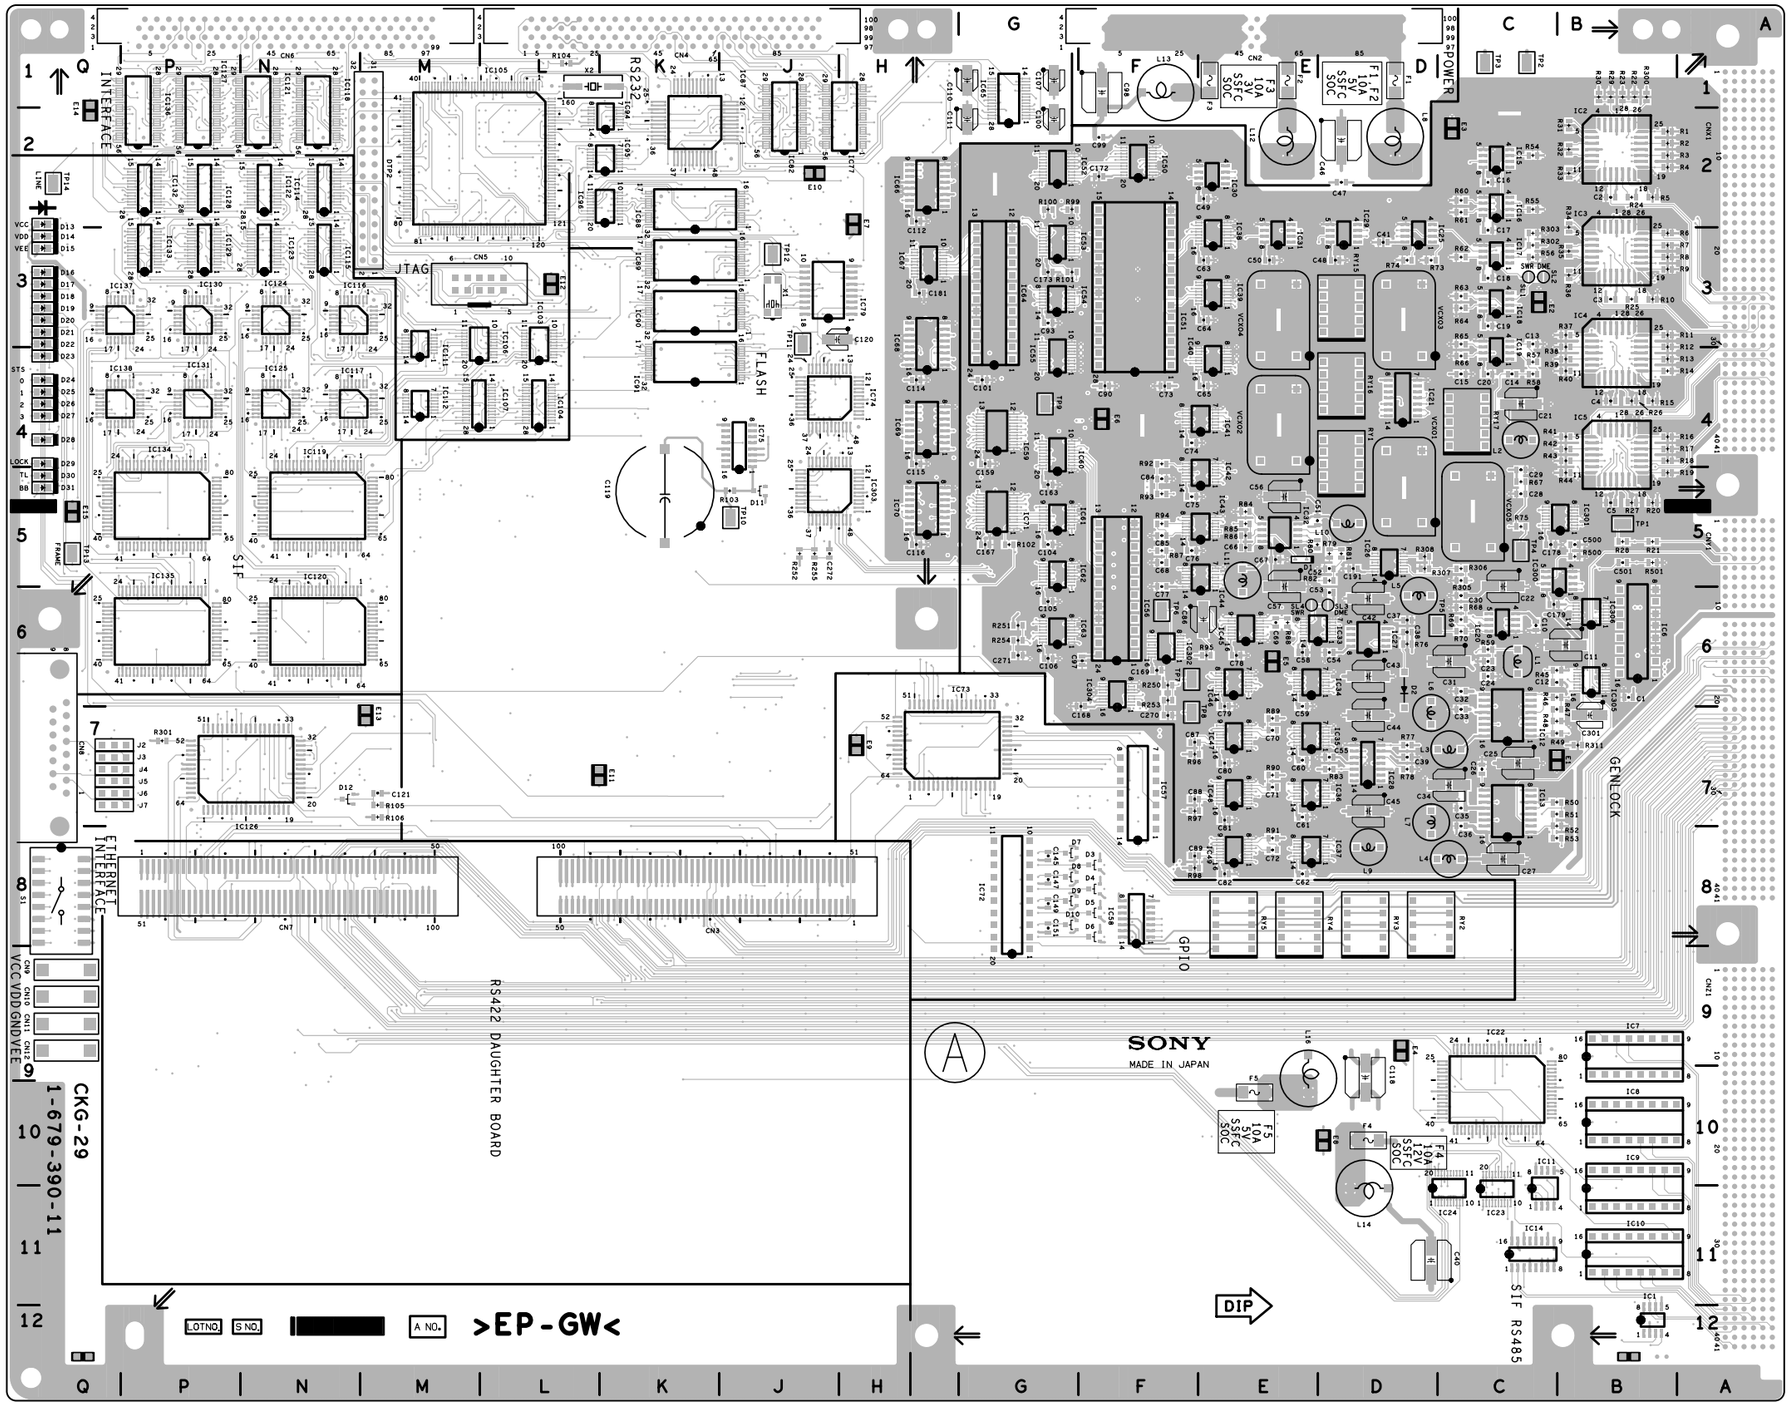


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher


CKG-29 -A SIDE-
SUFFIX: -11

CKG-29 (1-679-390-11)

CN2	E1	IC19	C4	IC131	P4
CN3	K8	IC20	C6	IC132	P2
CN4	K1	IC21	D4	IC133	P3
CN5	M3	IC22	C10	IC134	P5
CN6	N1	IC23	C11	IC135	P6
CN7	N8	IC24	D11	IC136	P2
CN8	Q7	IC25	D3	IC137	Q3
CN9	Q9	IC26	D5	IC138	Q4
CN10	Q9	IC27	D6	IC300	B6
CN11	Q9	IC28	D7	IC301	B5
CN12	Q9	IC29	D3	IC302	F6
		IC30	E2	IC303	J5
D1	E5	IC31	E3	IC304	F6
D2	D6	IC32	E5	IC305	B6
D3	F8	IC33	D6	IC306	B6
D4	F8	IC34	D6		
D5	F8	IC35	D7	J2	Q7
D6	F8	IC36	D7	J3	Q7
D7	G8	IC37	D8	J4	Q7
D8	G8	IC38	E3	J5	Q7
D9	G8	IC39	E3	J6	Q7
D10	G8	IC40	E4	J7	Q7
D11	J5	IC41	E4		
D12	N7	IC42	E5	L1	C6
D13	Q2	IC43	E5	L2	C4
D14	Q3	IC44	E6	L3	C7
D15	Q3	IC45	E6	L4	C8
D16	Q3	IC46	E6	L5	D6
D17	Q3	IC47	E7	L6	D7
D18	Q3	IC48	E7	L7	D7
D19	Q3	IC49	E8	L8	D2
D20	Q3	IC50	F2	L9	D8
D21	Q3	IC51	F4	L10	D5
D22	Q3	IC52	G2	L11	E5
D23	Q4	IC53	G3	L12	E2
D24	Q4	IC54	G3	L13	F1
D25	Q4	IC55	G4	L14	D11
D26	Q4	IC56	F6	L16	E10
D27	Q4	IC57	F8		
D28	Q4	IC58	F8	RY1	D4
D29	Q4	IC59	G4	RY2	D8
D30	Q5	IC60	G5	RY3	D8
D31	Q5	IC61	G5	RY4	E8
		IC62	G5	RY5	E8
DTP2	M2	IC63	G6	RY15	D3
		IC64	G4	RY16	D4
E1	C7	IC65	G2	RY17	C4
E2	C3	IC66	H2		
E3	C2	IC67	H3	S1	Q8
E4	D9	IC68	H4		
E5	E6	IC69	H4	SL1	C3
E6	F4	IC70	H5	SL2	C3
E7	H2	IC71	G5	SL3	D6
E8	D10	IC72	G9	SL4	E6
E9	H7	IC73	H7		
E10	J2	IC74	J4	TP1	B5
E11	L7	IC75	J4	TP2	C1
E12	L3	IC77	H2	TP3	C1
E13	M7	IC79	H3	TP4	C5
E14	Q2	IC82	J2	TP5	D6
E15	Q5	IC87	K2	TP6	F6
E16	*B9	IC88	J2	TP7	F6
E17	*D7	IC89	J3	TP8	F7
E18	*F3	IC90	J3	TP9	G4
E19	*H4	IC91	J4	TP10	J5
E20	*M3	IC94	K2	TP11	J3
E21	*N6	IC95	K2	TP12	J3
		IC96	K2	TP13	Q5
F1	D1	IC103	L4	TP14	Q2
F2	E1	IC104	L4		
F3	E1	IC105	M2	VCX1	D5
F4	D10	IC106	L4	VCX2	E4
F5	E10	IC107	L4	VCX3	D3
		IC111	M4	VCX4	E3
IC1	B12	IC112	M4	VCX5	C5
IC2	B2	IC114	N2		
IC3	B3	IC115	N3	X1	J3
IC4	B4	IC116	N3	X2	L1
IC5	B4	IC117	N4		
IC6	B6	IC118	N2	*:B SIDE	
IC7	B10	IC119	N5		
IC8	B10	IC120	N6		
IC9	B11	IC121	N2		
IC10	B11	IC122	N2		
IC11	C11	IC123	N3		
IC12	C7	IC124	N3		
IC13	C8	IC125	N4		
IC14	C11	IC126	N7		
IC15	C2	IC127	P2		
IC16	C2	IC128	P2		
IC17	C3	IC129	P3		
IC18	C3	IC130	P3		

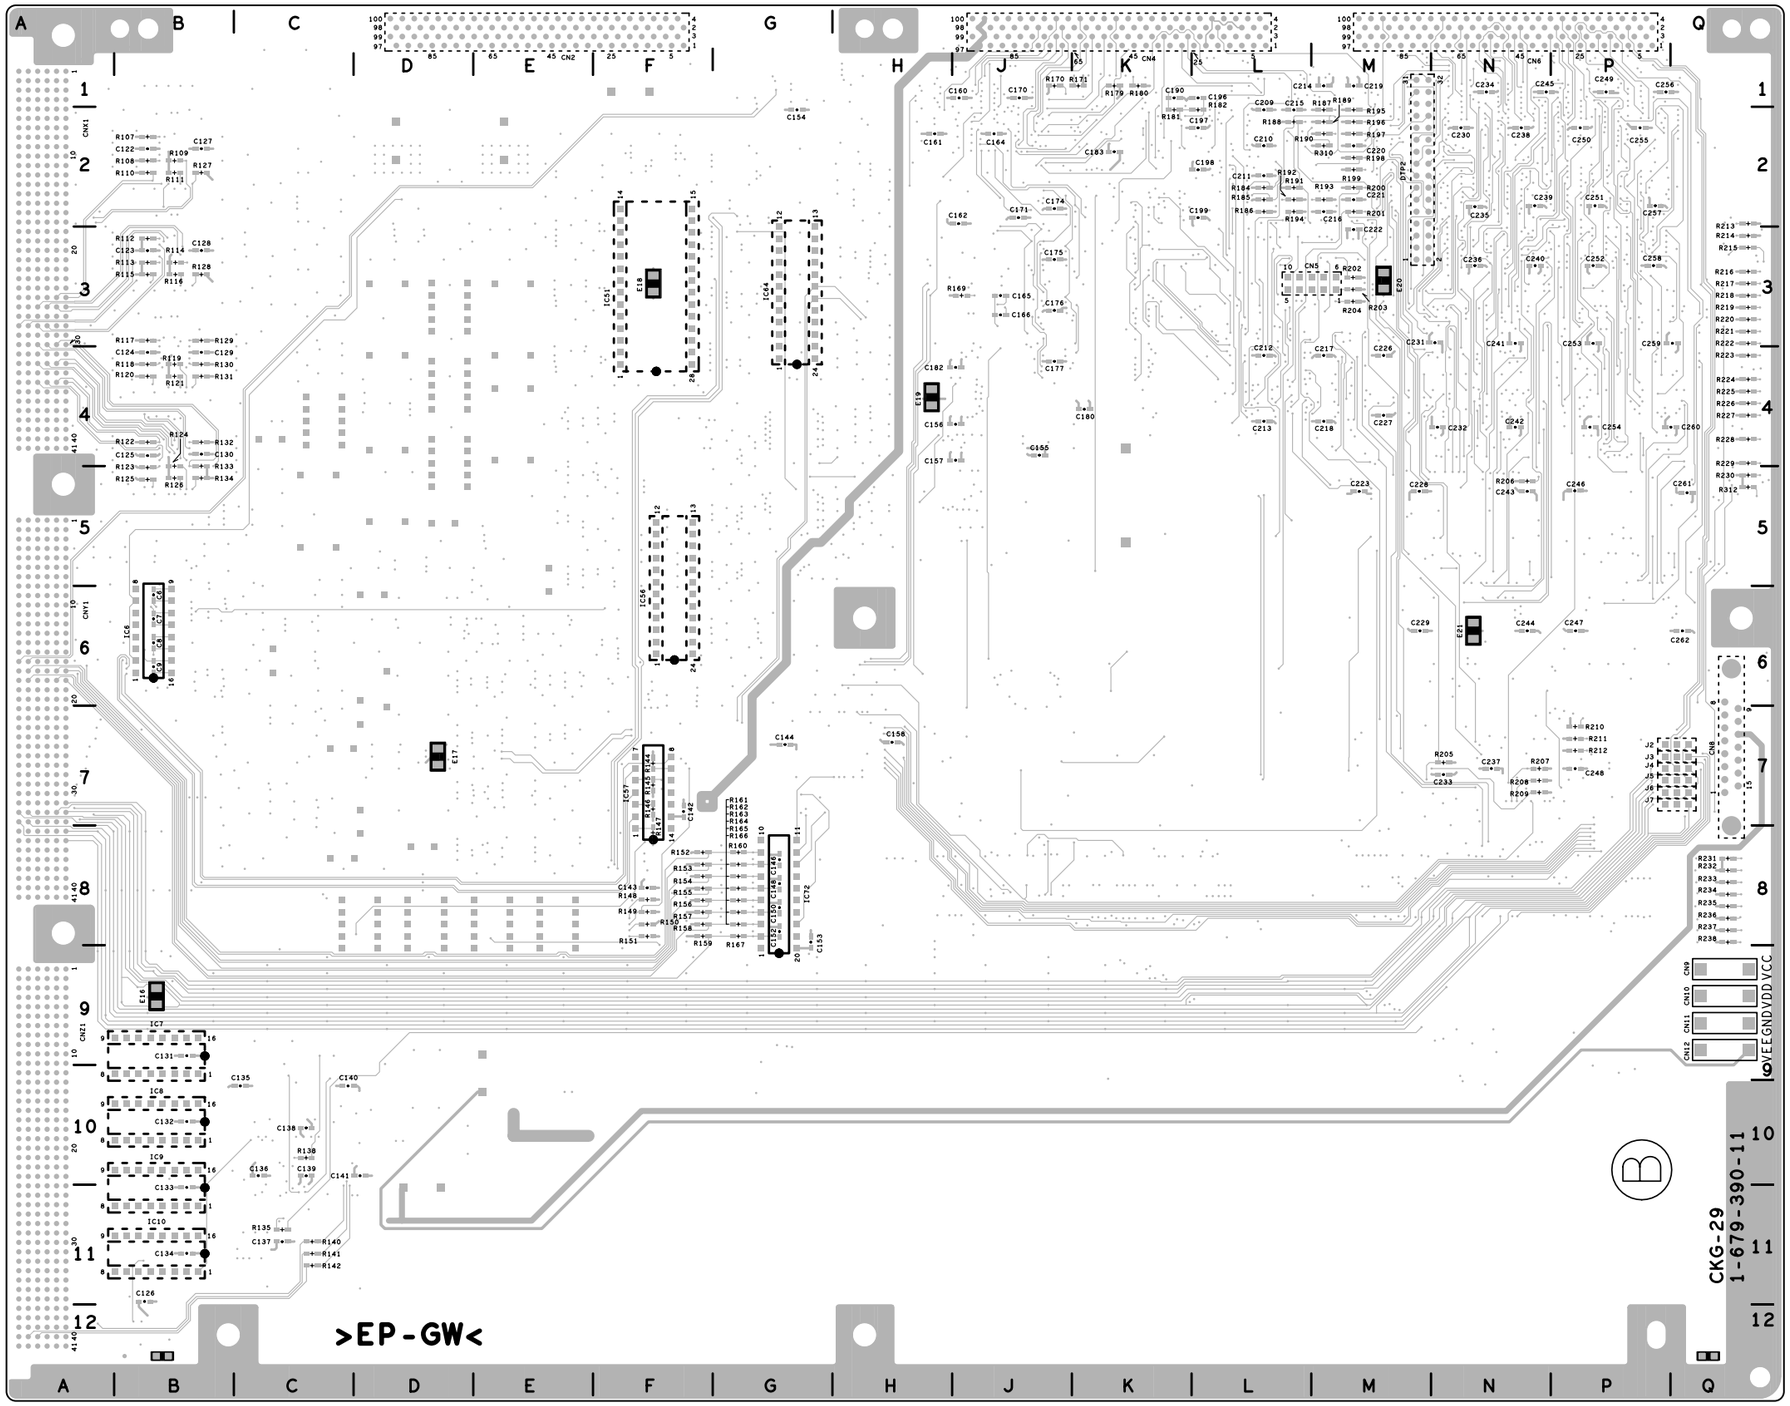

CKG-29 -B SIDE-
SUFFIX: -11

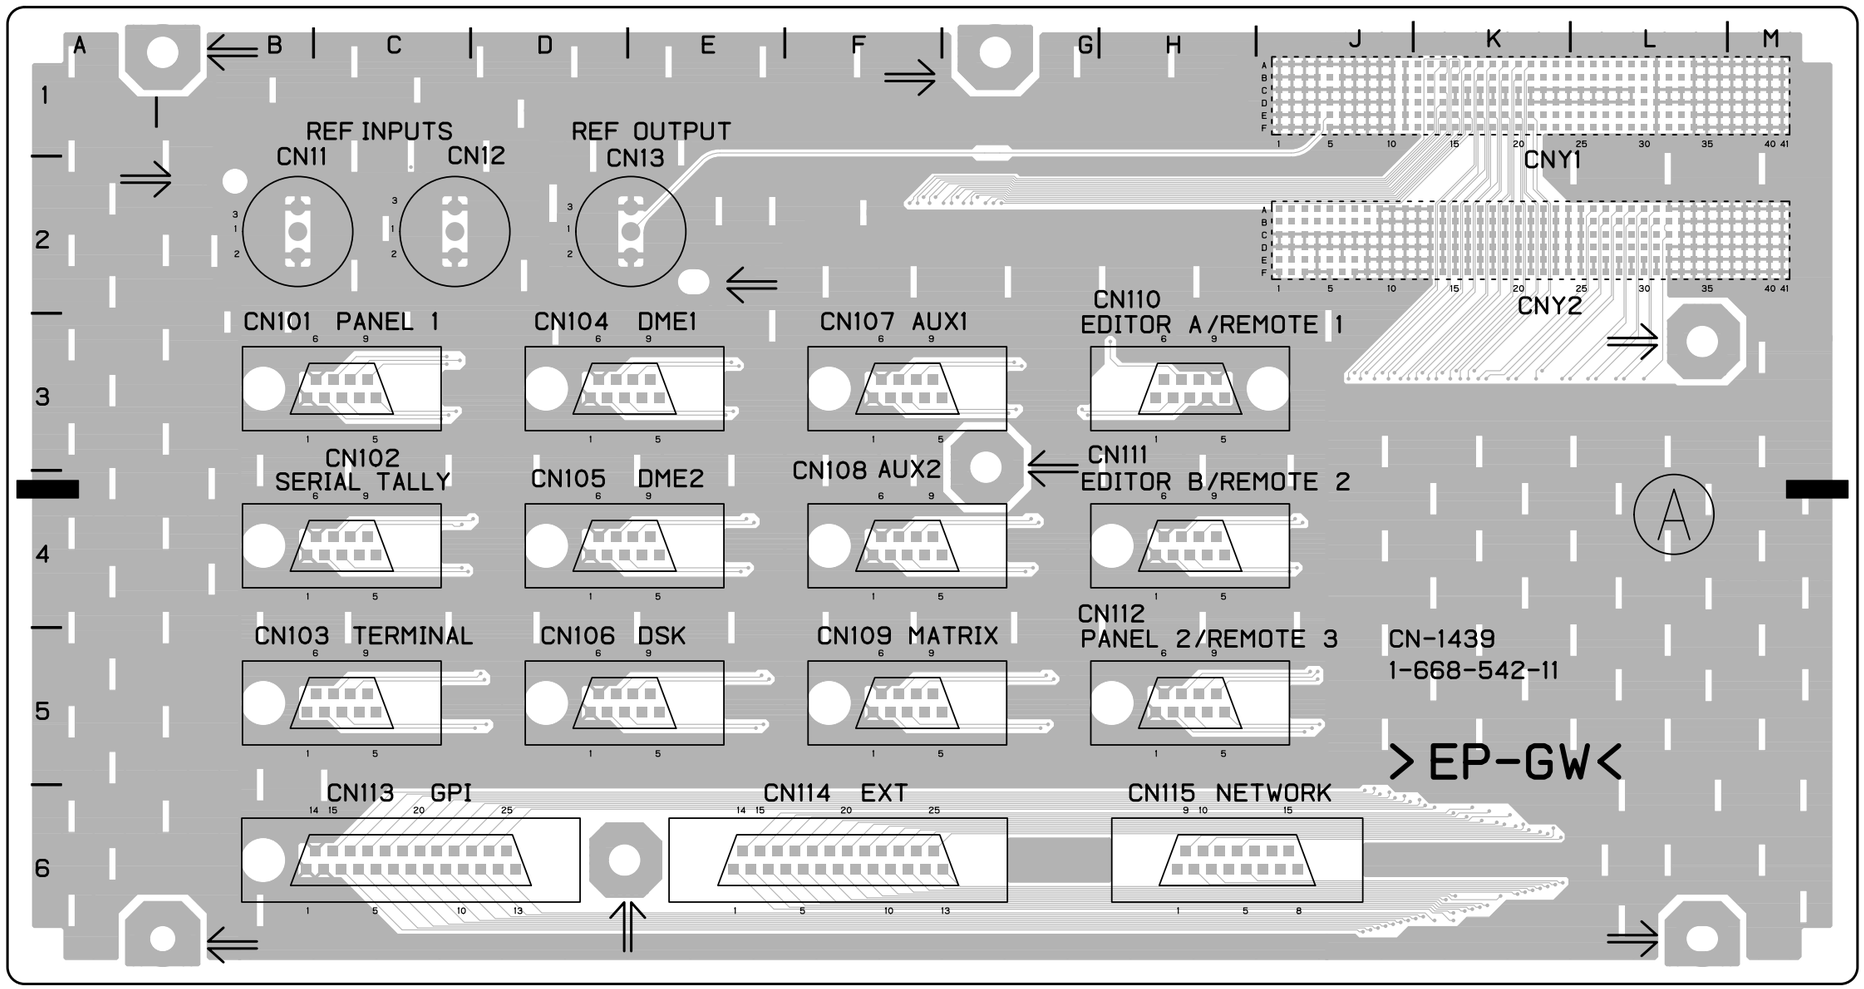


CN-1439 (1-668-542-11)

CN11	B2
CN12	C2
CN13	E2
CN101	C3
CN102	C4
CN103	C5
CN104	D3
CN105	D4
CN106	D5
CN107	F3
CN108	F4
CN109	F5
CN110	H3
CN111	H4
CN112	H5
CN113	C6
CN114	F6
CN115	H6
CNY1	*K1
CNY2	*K2
JW1	*C2
JW2	*C2
L1	*C2
L2	*C2

*:B SIDE


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

CN-1439 -A SIDE-
SUFFIX: -11

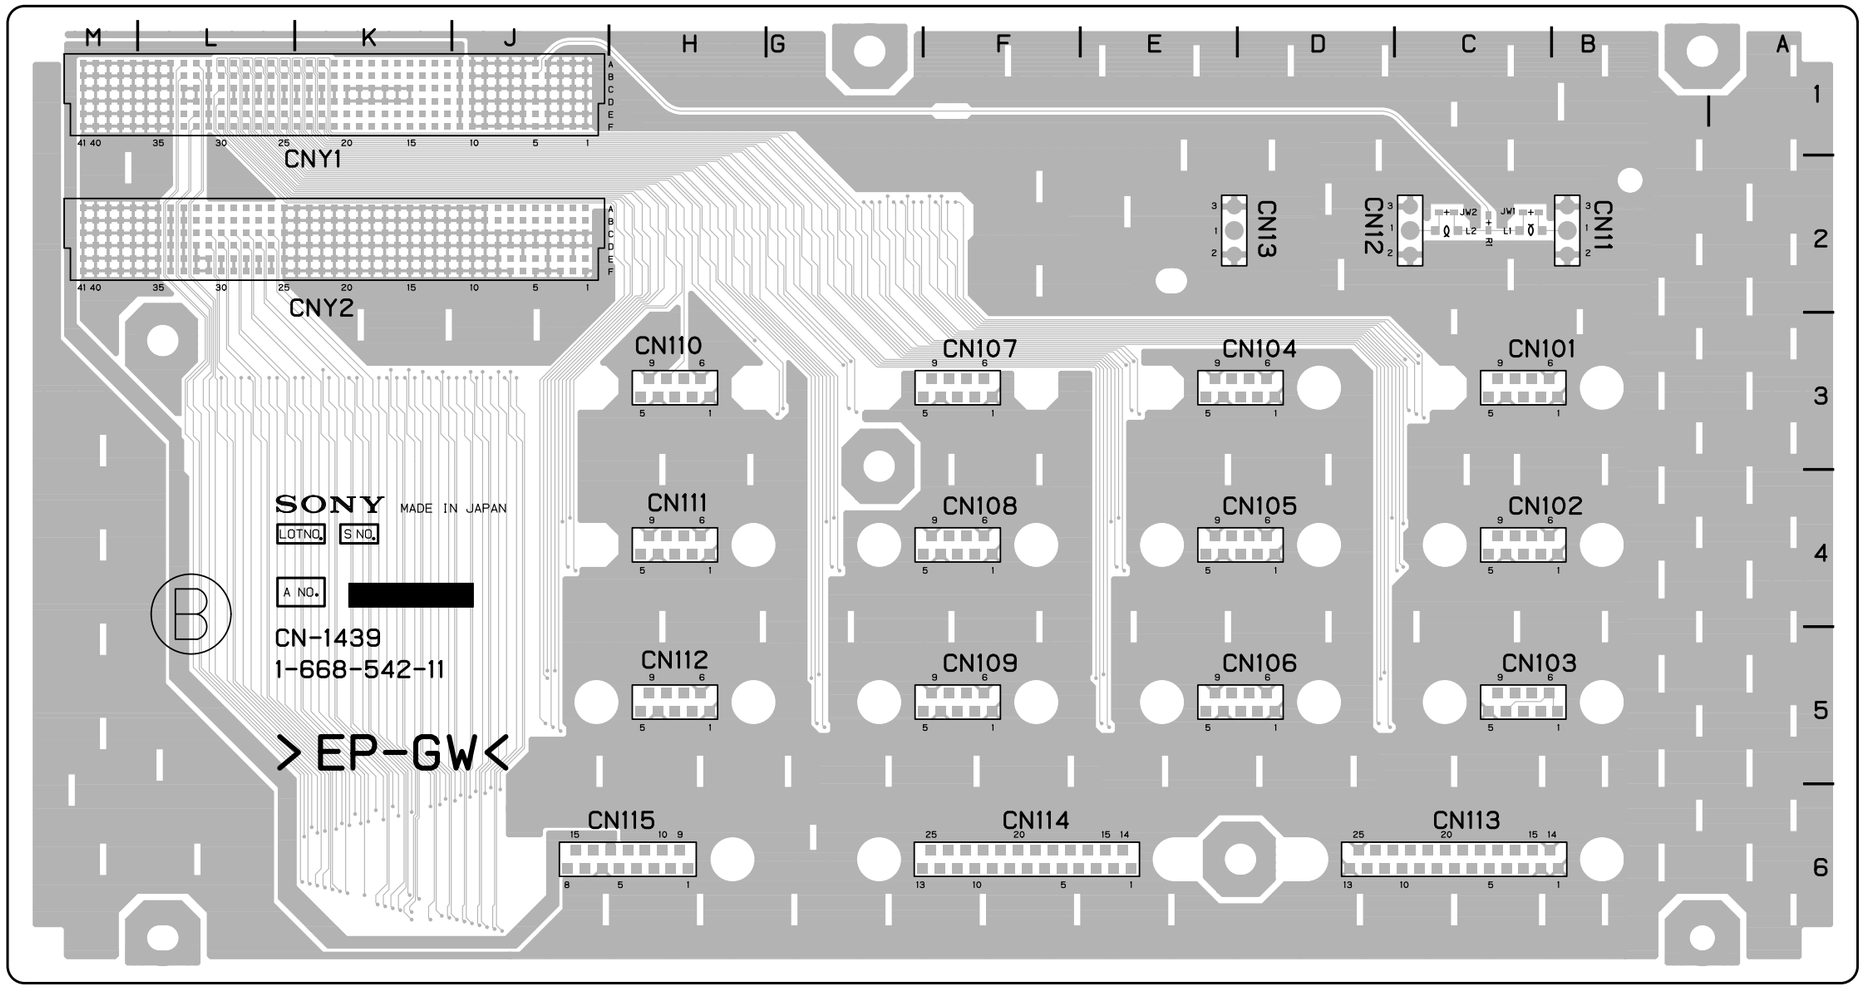


CN-1439 -B SIDE-
SUFFIX: -11

CN-1539, CN-1700, CN-1701, DU-79

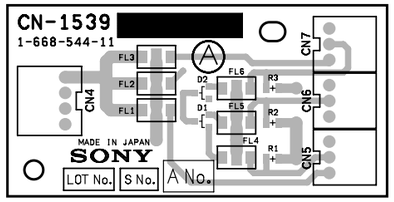


HDS-7000 (J) : S/N 10001 and Higher

CN-1539 -A SIDE-
SUFFIX: -11

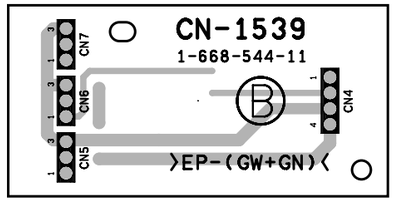


CN-1539 -B SIDE-
SUFFIX: -11

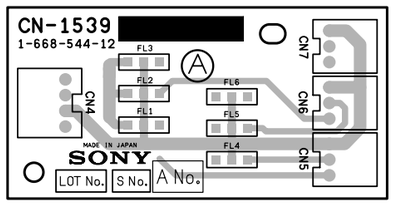


HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

CN-1539 -A SIDE-
SUFFIX: -12

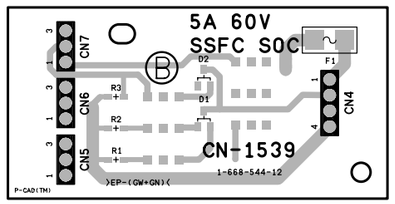

CN-1539 -B SIDE-
SUFFIX: -12

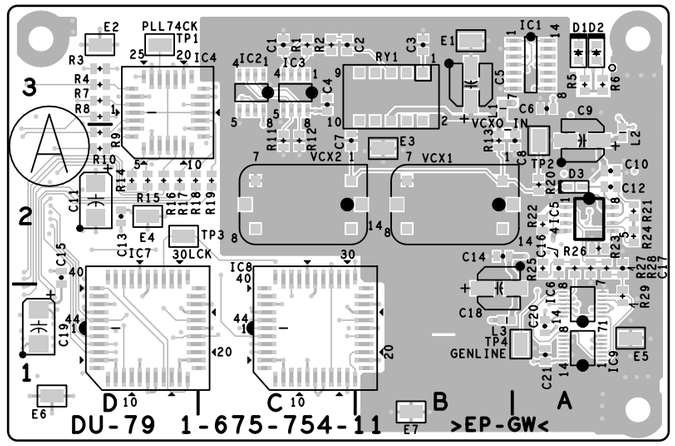

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher


DU-79 -A SIDE-
SUFFIX: -11

DU-79 (1-675-754-11)

*:B SIDE


CN1	*D2
D1	A3
D2	A3
D3	A2
E1	B3
E2	D3
E3	B2
E4	D2
E5	A1
E6	D1
E7	B1
E8	*A2
IC1	A3
IC2	C3
IC3	C3
IC4	D3
IC5	A2
IC6	A1
IC7	D1
IC8	C1
IC9	A1
IC10	*A2
IC11	*A2
IC12	*A2
L1	B3
L2	A2
L3	B1
RY1	B3
TP1	D3
TP2	A2
TP3	D2
TP4	A1
VCX1	B2
VCX2	C2

DU-79 -A SIDE-
SUFFIX: -11




HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

CN-1700 -A SIDE-
SUFFIX: -11




CN-1700 -B SIDE-
SUFFIX: -11




HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

CN-1701 -A SIDE-
SUFFIX: -11



CN-1701 -B SIDE-
SUFFIX: -11

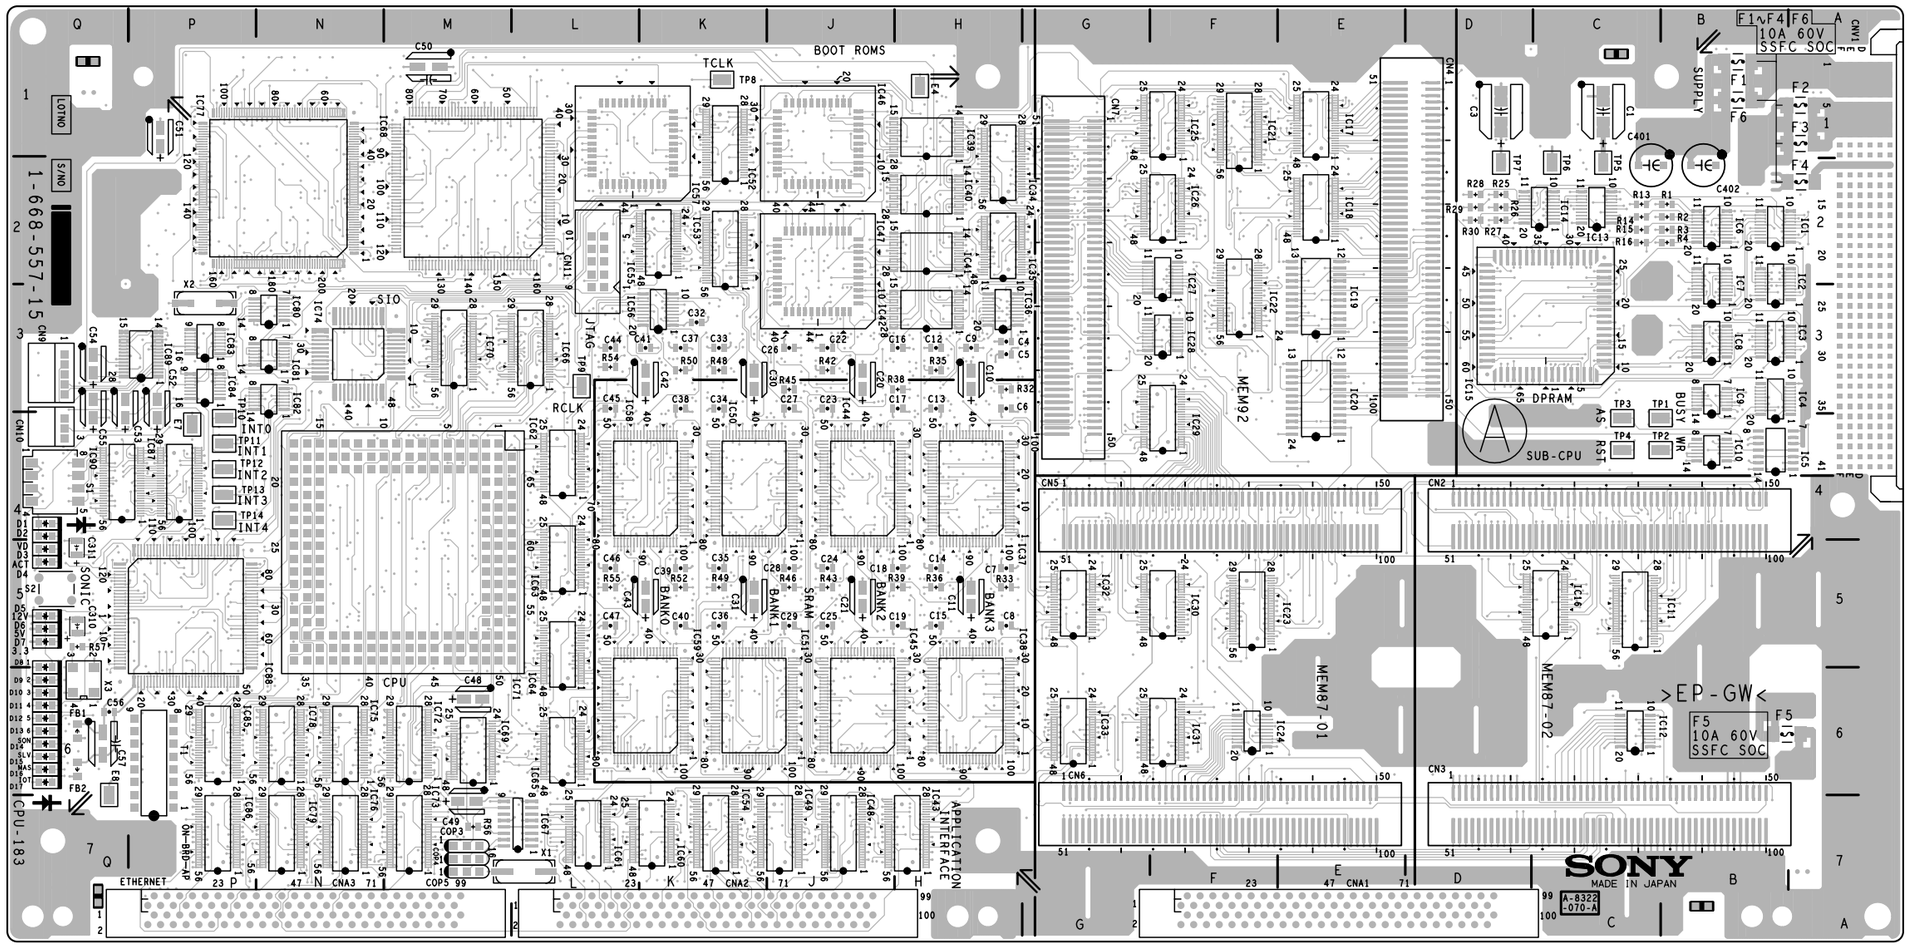


HDS-7000 (SY) : S/N 12021 and Higher


CPU-183 -A SIDE-
SUFFIX: -15

CPU-183 (1-668-557-15)

CN2	C4	IC28	F3	TP13	P4
CN3	C7	IC29	F4	TP14	P4
CN4	D2	IC30	F5		
CN5	F4	IC31	F6	X1	L7
CN6	F7	IC32	G5	X2	P3
CN7	G2	IC33	G6	X3	Q6
CN9	Q3	IC34	H2		
CN10	Q4	IC35	H2	*:B SIDE	
CN11	L3	IC36	H3		
		IC37	H4		
CNA1	F7	IC38	H6		
CNA2	L7	IC39	H1		
CNA3	P7	IC40	H2		
		IC41	H2		
CNV1	A1	IC42	H3		
		IC43	H7		
COP3	M7	IC44	J4		
COP4	M7	IC45	J6		
COP5	M7	IC46	J1		
		IC47	J2		
D1	Q4	IC48	J7		
D2	Q4	IC49	J7		
D3	Q5	IC50	K4		
D4	Q5	IC51	K6		
D5	Q5	IC52	K1		
D6	Q5	IC53	K2		
D7	Q5	IC54	K7		
D8	Q5	IC55	K2		
D9	Q6	IC56	K3		
D10	Q6	IC57	L1		
D11	Q6	IC58	K4		
D12	Q6	IC59	K6		
D13	Q6	IC60	K7		
D14	Q6	IC61	L7		
D15	Q6	IC62	L4		
D16	Q6	IC63	L5		
D17	Q6	IC64	L5		
		IC65	L6		
E4	H1	IC66	L3		
E7	P4	IC67	L7		
E8	Q6	IC68	M2		
E9	*C2	IC69	M6		
E10	*G5	IC70	M3		
E11	*L3	IC71	M4		
		IC72	M6		
F1	B1	IC73	M7		
F2	A1	IC74	N3		
F3	A1	IC75	N6		
F4	A2	IC76	N7		
F5	B6	IC77	N2		
F6	B1	IC78	N6		
		IC79	N7		
FB1	Q6	IC80	N3		
FB2	Q6	IC81	N3		
FB3	*M7	IC82	N3		
FB4	*M7	IC83	P3		
FB5	*M5	IC84	P3		
FB6	*M5	IC85	P6		
		IC86	P7		
FID1	Q1	IC87	P4		
FID2	A7	IC88	P5		
FID3	*Q1	IC89	P3		
FID4	*A7	IC90	Q4		
		IC91	P7		
IC1	B2	IC92	*H3		
IC2	B2	IC93	*H5		
IC3	B3	IC94	*J3		
IC4	B3	IC95	*J5		
IC5	B4	IC96	*K3		
IC6	B2	IC97	*K5		
IC7	B2	IC98	*K3		
IC8	B3	IC99	*K5		
IC9	B3	IC100	*Q5		
IC10	B4	IC101	*Q5		
IC11	C5	IC200	*N2		
IC12	C6				
IC13	C2	S1	Q4		
IC14	C2	S2	Q5		
IC15	C3				
IC16	C5	TP1	B4		
IC17	E1	TP2	B4		
IC18	E2	TP3	C4		
IC19	E3	TP4	C4		
IC20	E3	TP5	C2		
IC21	F1	TP6	C2		
IC22	F3	TP7	D2		
IC23	F5	TP8	K1		
IC24	F6	TP9	L3		
IC25	F1	TP10	P4		
IC26	F2	TP11	P4		
IC27	F2	TP12	P4		

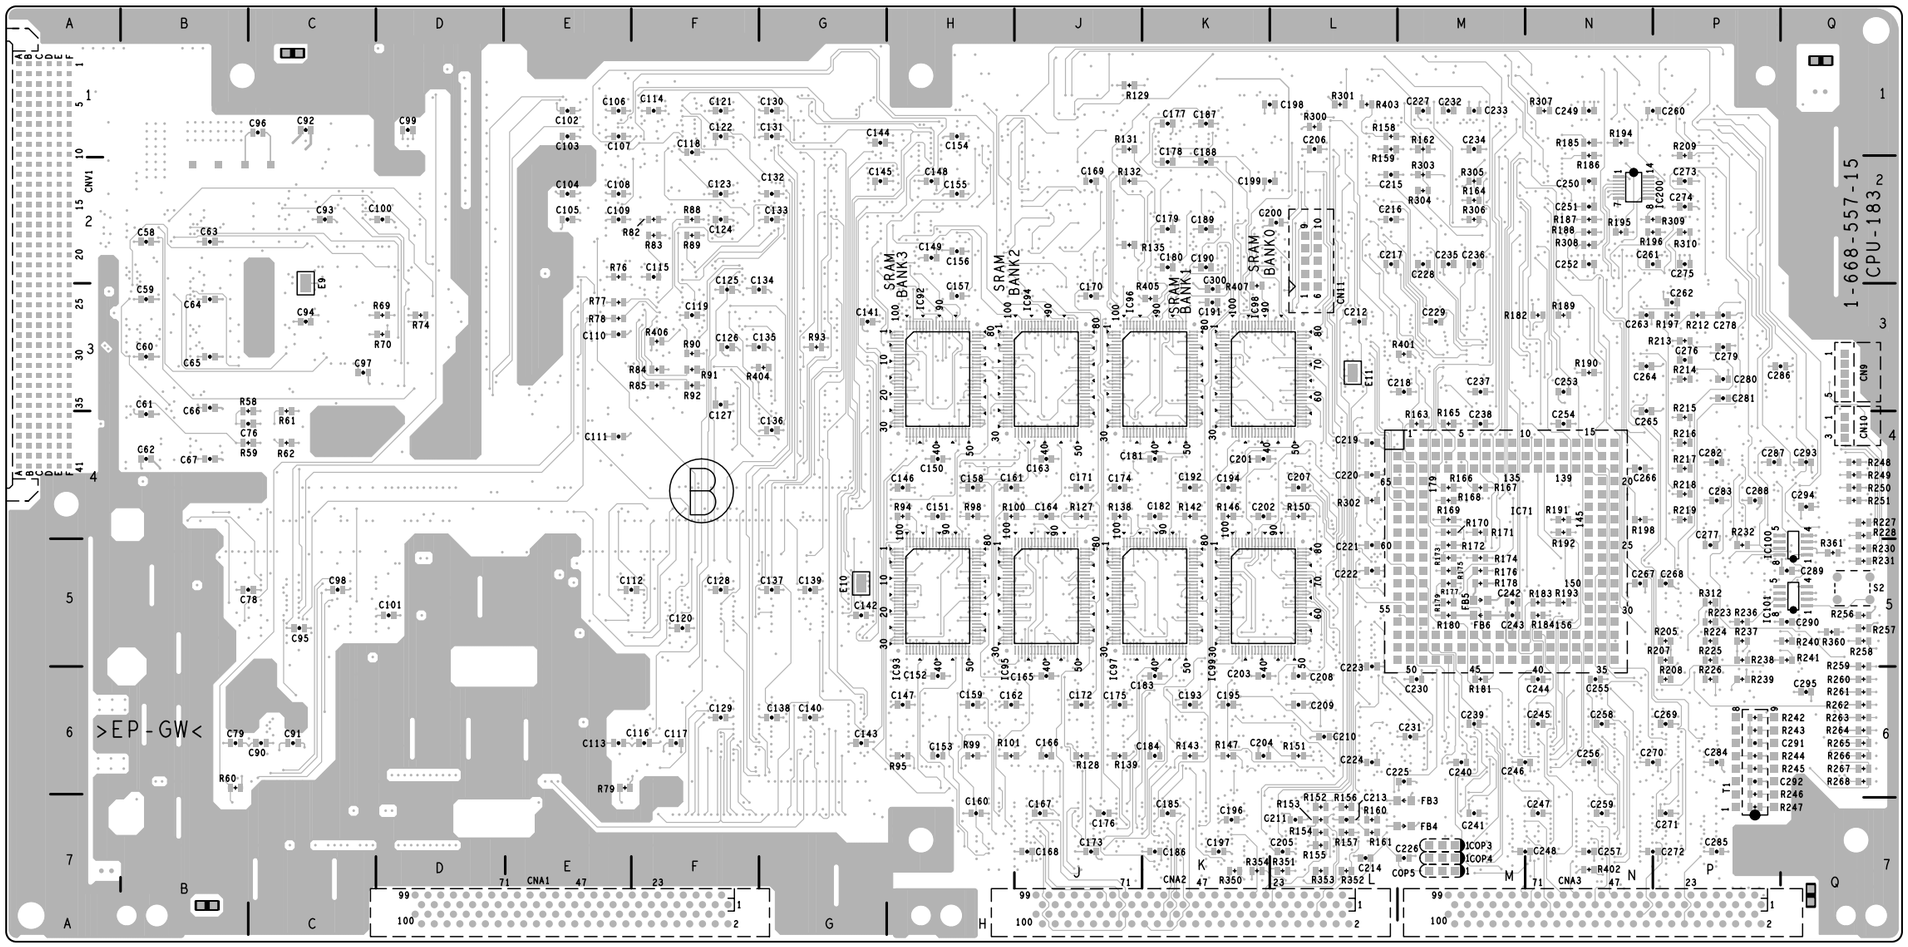

CPU-183 -B SIDE-
SUFFIX: -15

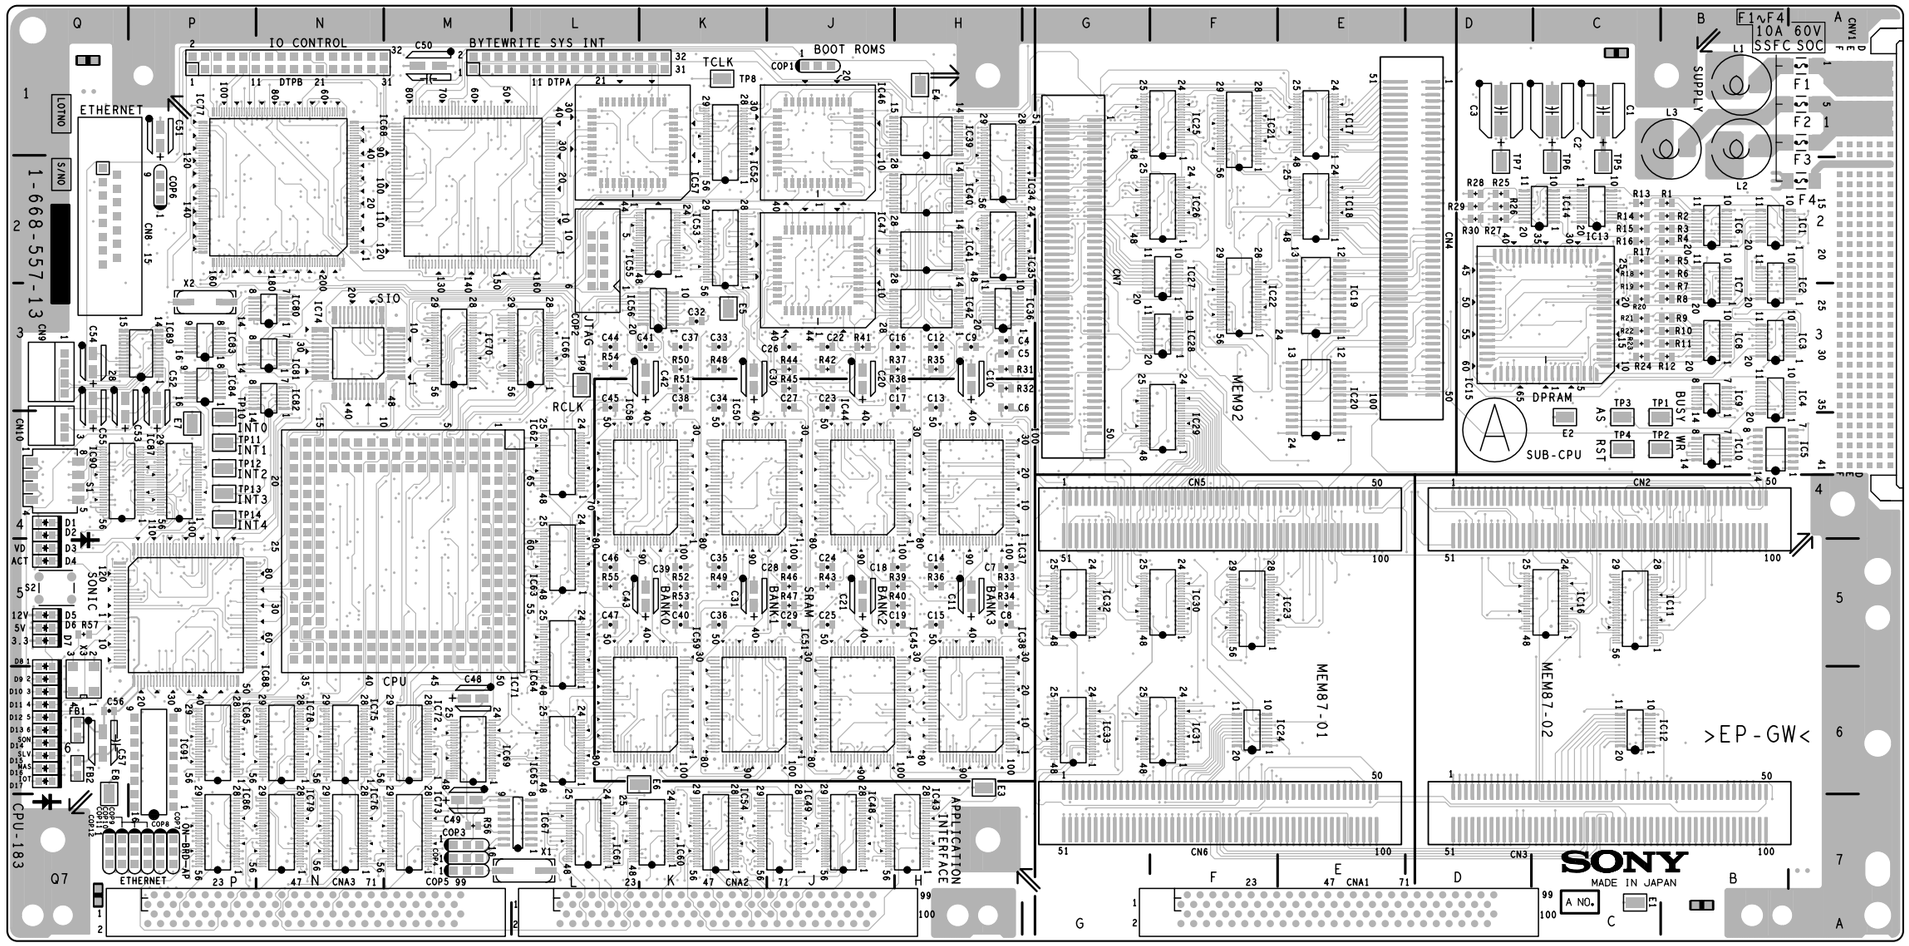


HDS-7000 (UCJ) : S/N 11029 and Higher
HDS-7000 (SY) : S/N 12001 through 12020


CPU-183 -A SIDE-
SUFFIX: -13

CPU-183 (1-668-557-13)

CN2	C4	IC16	C5	L3	B1
CN3	C7	IC17	E1		
CN4	D2	IC18	E2	S1	Q4
CN5	F4	IC19	E3	S2	Q5
CN6	F7	IC20	E3		
CN7	G2	IC21	F1	TP1	B4
CN8	Q2	IC22	F3	TP2	B4
CN9	Q3	IC23	F5	TP3	C4
CN10	Q4	IC24	F6	TP4	C4
		IC25	F1	TP5	C2
CNA1	F7	IC26	F2	TP6	C2
CNA2	L7	IC27	F2	TP7	D2
CNA3	P7	IC28	F3	TP8	K1
		IC29	F4	TP9	L3
CNV1	A1	IC30	F5	TP10	P4
		IC31	F6	TP11	P4
COP1	J1	IC32	G5	TP12	P4
COP2	L3	IC33	G6	TP13	P4
COP3	M7	IC34	H2	TP14	P4
COP4	M7	IC35	H2		
COP5	M7	IC36	H3	X1	L7
COP6	P2	IC37	H4	X2	P3
COP7	P7	IC38	H6	X3	Q6
COP8	P7	IC39	H1		
COP9	P7	IC40	H2	*:B SIDE	
COP10	P7	IC41	H2		
COP11	Q7	IC42	H3		
COP12	Q7	IC43	H7		
		IC44	J4		
D1	Q4	IC45	J6		
D2	Q4	IC46	J1		
D3	Q5	IC47	J2		
D4	Q5	IC48	J7		
D5	Q5	IC49	J7		
D6	Q5	IC50	K4		
D7	Q5	IC51	K6		
D8	Q5	IC52	K1		
D9	Q6	IC53	K2		
D10	Q6	IC54	K7		
D11	Q6	IC55	K2		
D12	Q6	IC56	K3		
D13	Q6	IC57	L1		
D14	Q6	IC58	K4		
D15	Q6	IC59	K6		
D16	Q6	IC60	K7		
D17	Q6	IC61	L7		
		IC62	L4		
DTP1	M1	IC63	L5		
DTP2	P1	IC64	L5		
		IC65	L6		
E1	C7	IC66	L3		
E2	C4	IC67	L7		
E3	H6	IC68	M2		
E4	H1	IC69	M6		
E5	K3	IC70	M3		
E6	K6	IC71	M4		
E7	P4	IC72	M6		
E8	Q6	IC73	M7		
E9	*C2	IC74	N3		
E10	*G5	IC75	N6		
E11	*L3	IC76	N7		
E12	*P3	IC77	N2		
		IC78	N6		
F1	A1	IC79	N7		
F2	A1	IC80	N3		
F3	A1	IC81	N3		
F4	A2	IC82	N3		
		IC83	P3		
FB1	Q6	IC84	P3		
FB2	Q6	IC85	P6		
FB3	*M7	IC86	P7		
FB4	*M7	IC87	P4		
FB5	*M5	IC88	P5		
FB6	*M5	IC89	P3		
		IC90	Q4		
IC1	B2	IC91	P7		
IC2	B2	IC92	*H3		
IC3	B3	IC93	*H5		
IC4	B3	IC94	*J3		
IC5	B4	IC95	*J5		
IC6	B2	IC96	*K3		
IC7	B2	IC97	*K5		
IC8	B3	IC98	*K3		
IC9	B3	IC99	*K5		
IC10	B4	IC100	*Q5		
IC11	C5	IC101	*Q5		
IC12	C6	IC200	*N2		
IC13	C2				
IC14	C2	L1	B1		
IC15	C3	L2	B1		

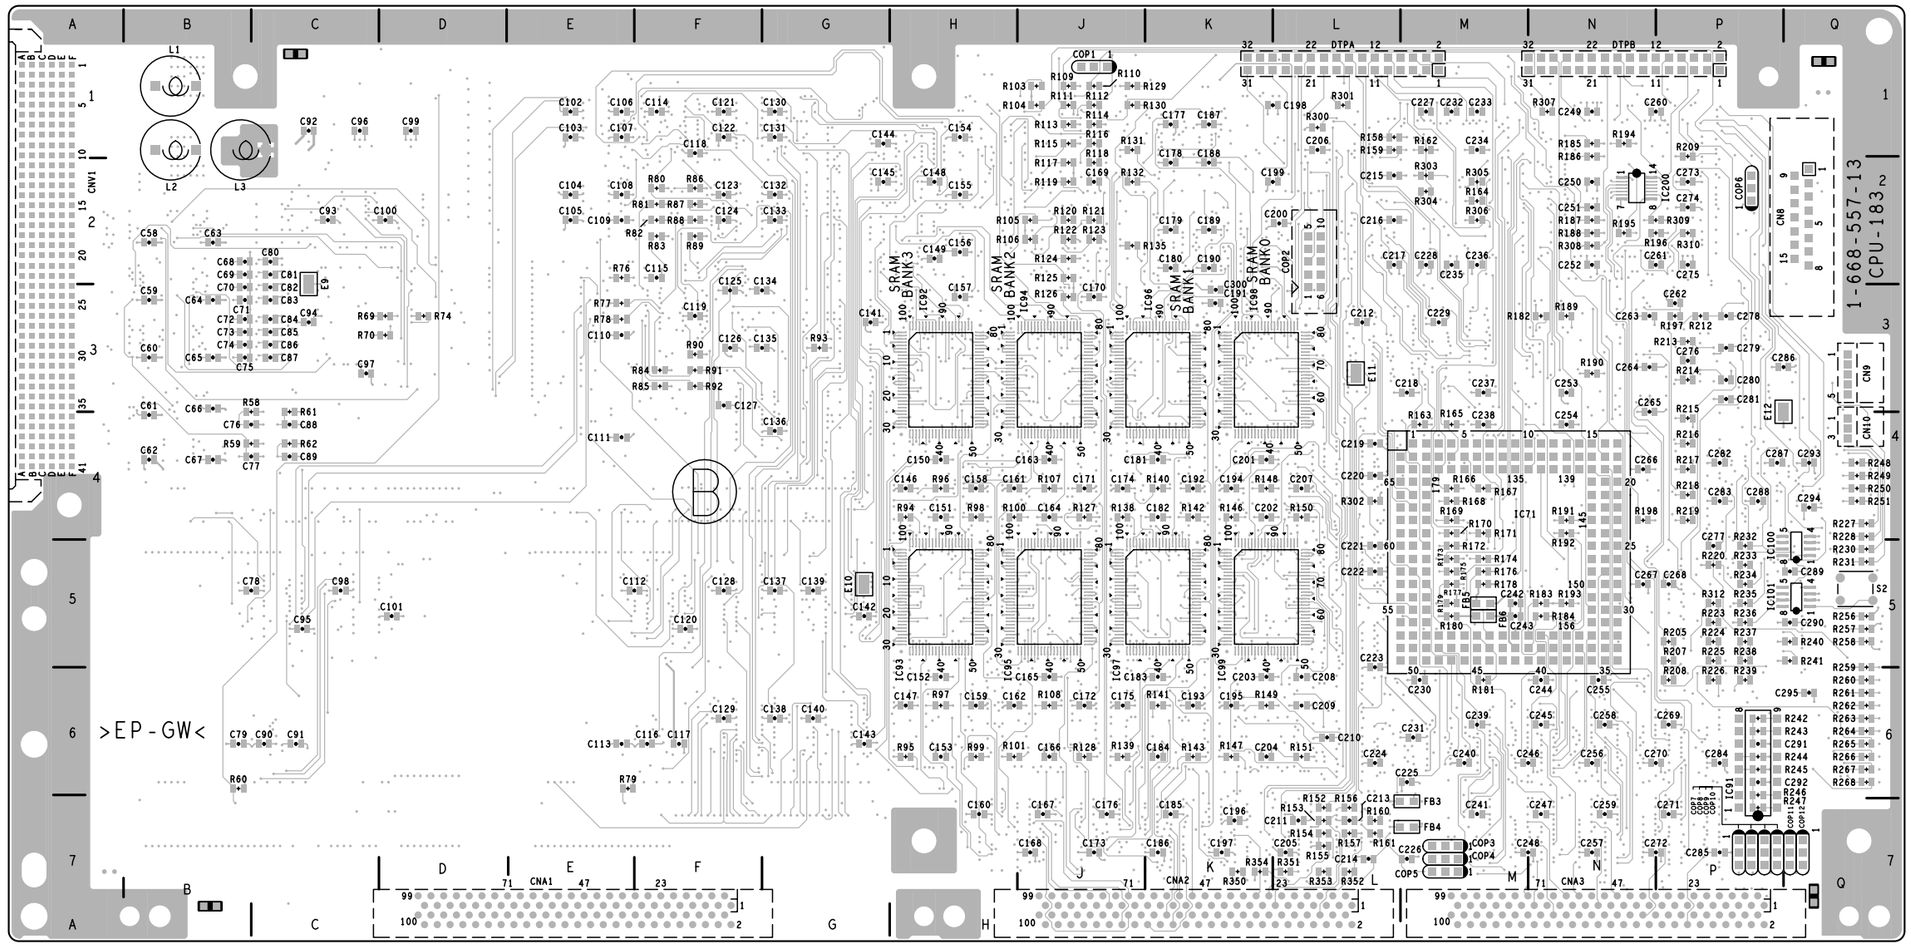

CPU-183 -B SIDE-
SUFFIX: -13

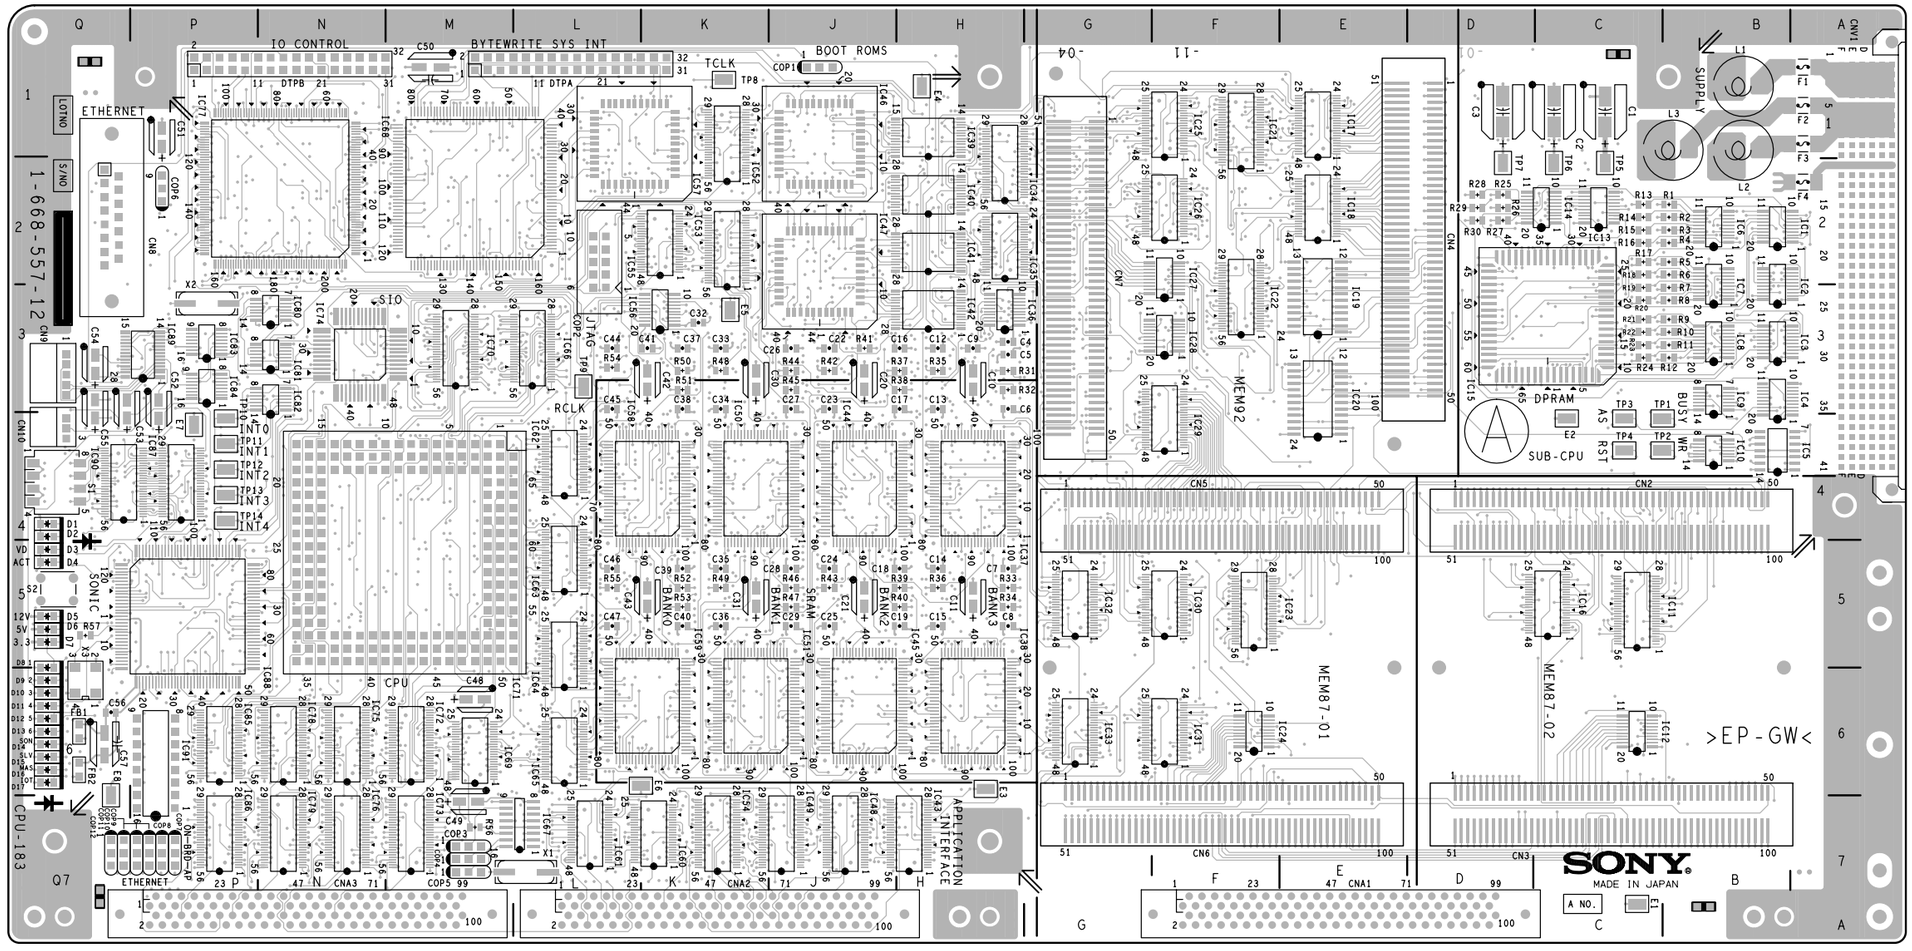


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 through 11028

CPU-183 -A SIDE-


SUFFIX: -12

CPU-183 (1-668-557-12)

CN2	C4	IC20	E3	TP1	B4
CN3	C7	IC21	F1	TP2	B4
CN4	D2	IC22	F3	TP3	C4
CN5	F4	IC23	F5	TP4	C4
CN6	F7	IC24	F6	TP5	C2
CN7	G2	IC25	F1	TP6	C2
CN8	Q2	IC26	F2	TP7	D2
CN9	Q3	IC27	F2	TP8	K1
CN10	Q4	IC28	F3	TP9	L3
		IC29	F4	TP10	P4
CNA1	F7	IC30	F5	TP11	P4
CNA2	L7	IC31	F6	TP12	P4
CNA3	P7	IC32	G5	TP13	P4
		IC33	G6	TP14	P4
COP1	J1	IC34	H2		
COP2	L3	IC35	H2	X1	L7
COP3	M7	IC36	H3	X2	P3
COP4	M7	IC37	H4	X3	Q6
COP5	M7	IC38	H6		
COP6	P2	IC39	H1	*:B SIDE	
COP7	P7	IC40	H2		
COP8	P7	IC41	H2		
COP9	P7	IC42	H3		
COP10	P7	IC43	H7		
COP11	Q7	IC44	J4		
COP12	Q7	IC45	J6		
		IC46	J1		
D1	Q4	IC47	J2		
D2	Q4	IC48	J7		
D3	Q5	IC49	J7		
D4	Q5	IC50	K4		
D5	Q5	IC51	K6		
D6	Q5	IC52	K1		
D7	Q5	IC53	K2		
D8	Q5	IC54	K7		
D9	Q6	IC55	K2		
D10	Q6	IC56	K3		
D11	Q6	IC57	L1		
D12	Q6	IC58	K4		
D13	Q6	IC59	K6		
D14	Q6	IC60	K7		
D15	Q6	IC61	L7		
D16	Q6	IC62	L4		
D17	Q6	IC63	L5		
		IC64	L5		
DTP1	M1	IC65	L6		
DTP2	P1	IC66	L3		
		IC67	L7		
E1	C7	IC68	M2		
E2	C4	IC69	M6		
E3	H6	IC70	M3		
E4	H1	IC71	M4		
E5	K3	IC72	M6		
E6	K6	IC73	M7		
E7	P4	IC74	N3		
E8	Q6	IC75	N6		
E9	*C2	IC76	N7		
E10	*G5	IC77	N2		
E11	*L3	IC78	N6		
E12	*P3	IC79	N7		
		IC80	N3		
F1	A1	IC81	N3		
F2	A1	IC82	N3		
F3	A1	IC83	P3		
F4	A2	IC84	P3		
		IC85	P6		
FB1	Q6	IC86	P7		
FB2	Q6	IC87	P4		
FB3	*M7	IC88	P5		
FB4	*M7	IC89	P3		
FB5	*M5	IC90	Q4		
FB6	*M5	IC91	P7		
		IC92	*H3		
IC1	B2	IC93	*H5		
IC2	B2	IC94	*J3		
IC3	B3	IC95	*J5		
IC4	B3	IC96	*K3		
IC5	B4	IC97	*K5		
IC6	B2	IC98	*K3		
IC7	B2	IC99	*K5		
IC8	B3	IC100	*Q5		
IC9	B3	IC101	*Q5		
IC10	B4	IC200	*N2		
IC11	C5				
IC12	C6	L1	B1		
IC13	C2	L2	B1		
IC14	C2	L3	B1		
IC15	C3				
IC16	C5				
IC17	E1	S1	Q4		
IC18	E2	S2	Q5		
IC19	E3				

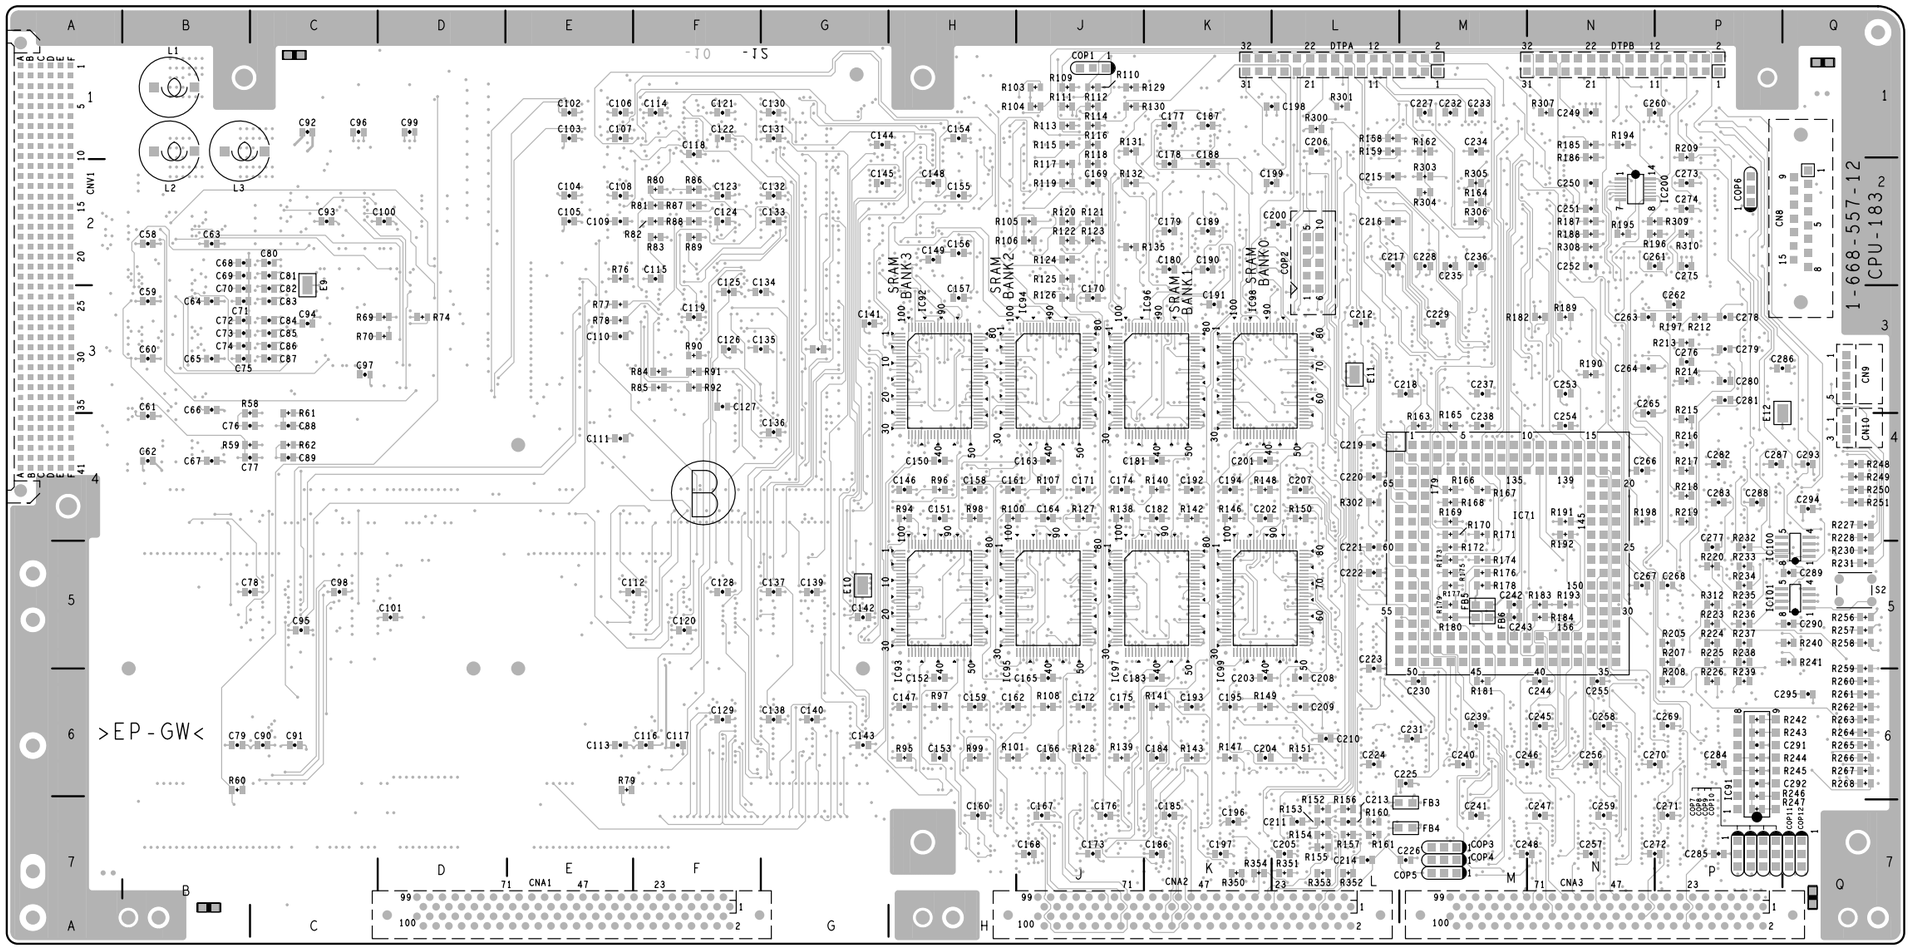

CPU-183 -B SIDE-
SUFFIX: -12

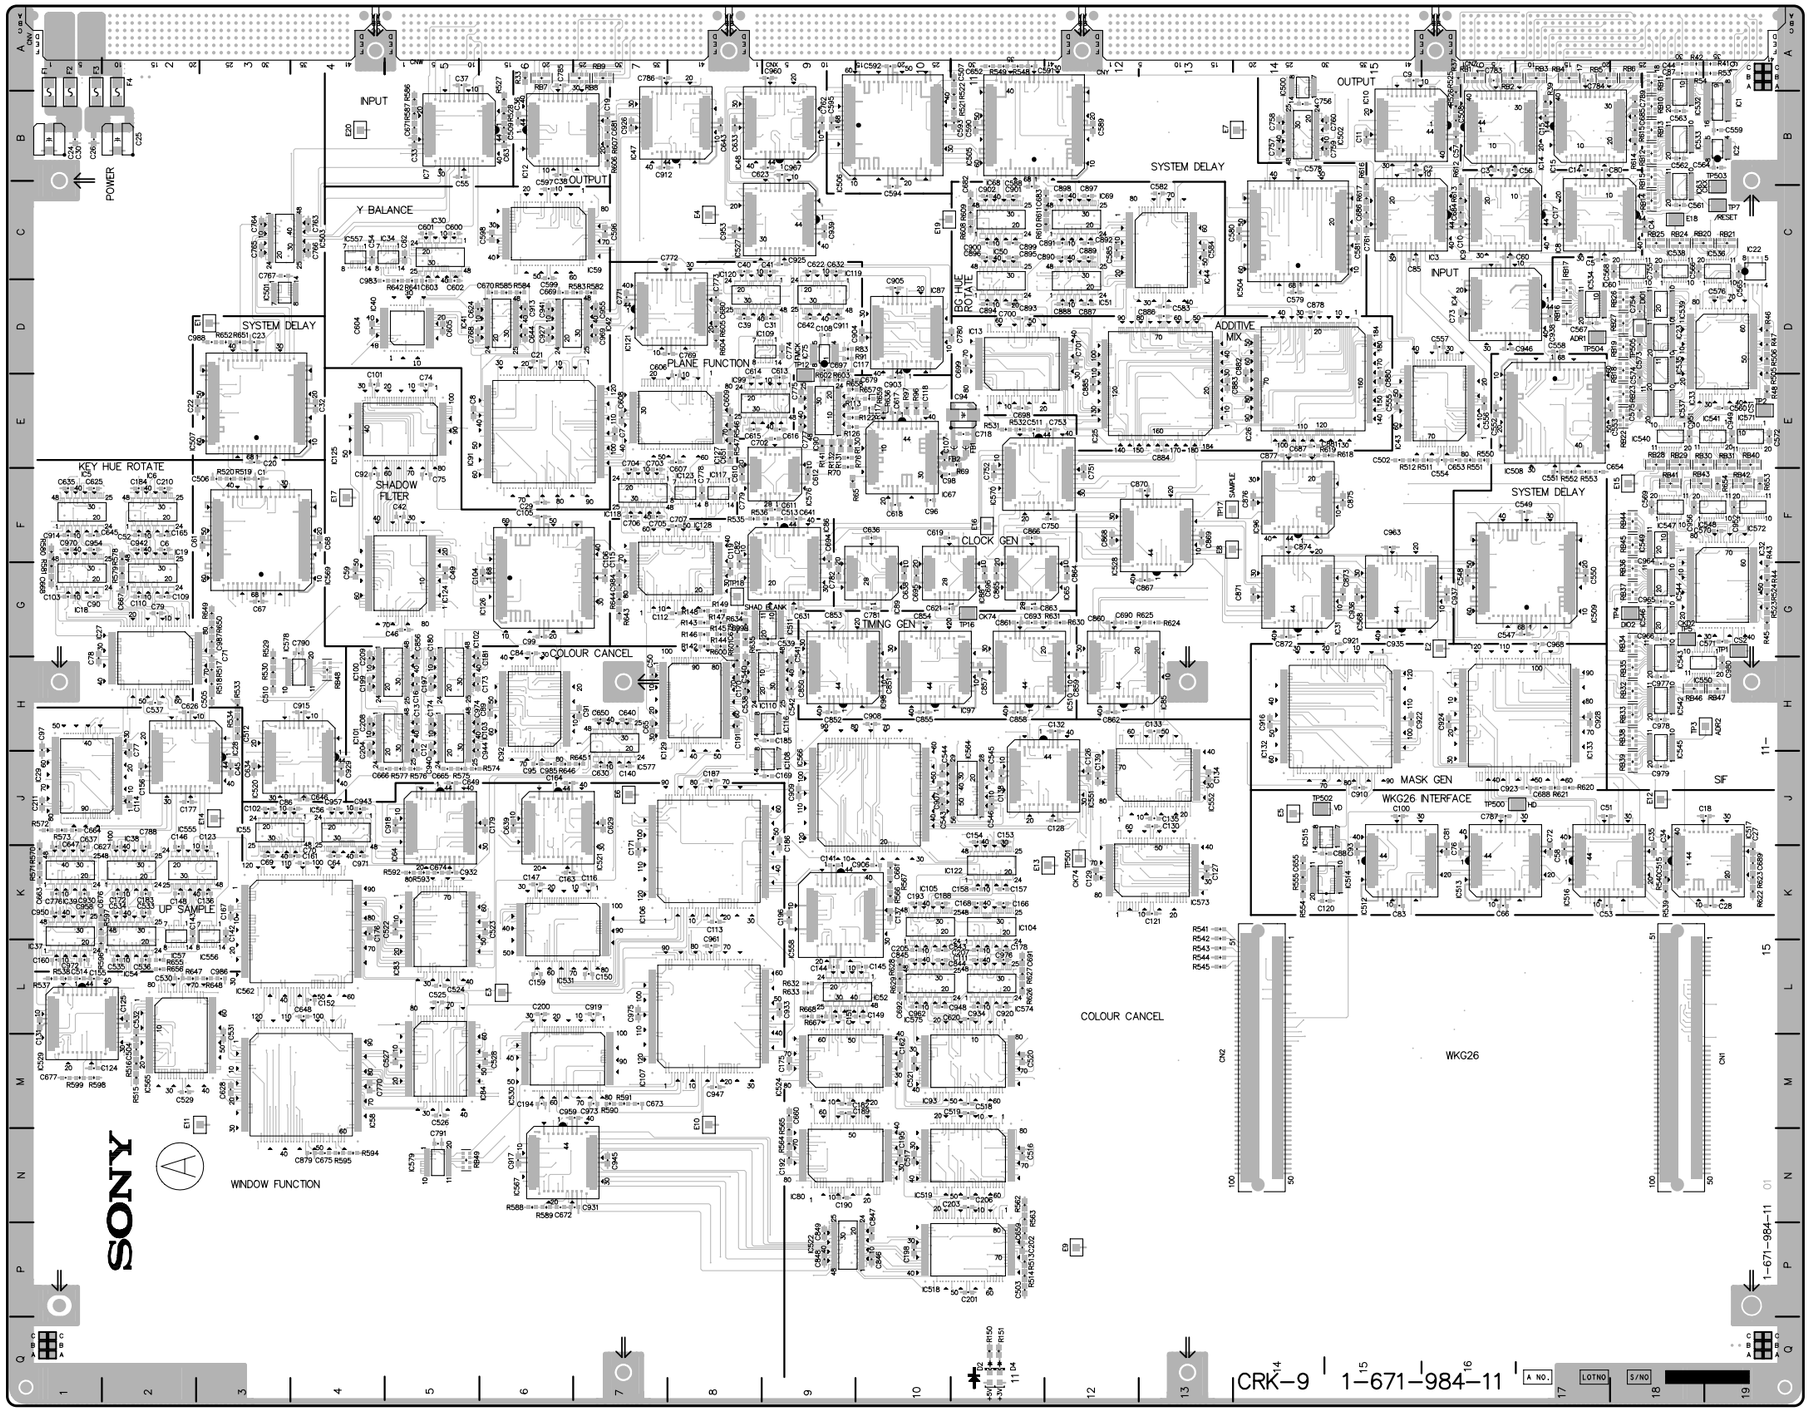

HKDS-7031 (UCJ) : S/N 10001 and Higher, S/N 11001 and Higher
HKDS-7031 (SY) : S/N 12001 and Higher

CRK-9 -A SIDE-
SUFFIX: -11


CRK-9 (1-671-984-11)

CNV1	A3	IC59	C6
		IC60	C18
CNW1	A6	IC63	C18
		IC64	J5
CNX1	A10	IC65	G11
		IC67	E10
CNY1	A14	IC68	C11
		IC69	C12
CNZ1	A18	IC75	D9
		IC80	N9
CN1	L18	IC83	K5
CN2	L14	IC84	M5
		IC85	H12
D2	Q11	IC86	G9
D4	Q11	IC87	D10
		IC88	G10
E1	D3	IC89	G10
E2	G16	IC90	E9
E3	L6	IC91	E6
E4	C8	IC92	H6
E5	J14	IC93	M11
E6	J7	IC96	F14
E7	B14	IC97	H10
E8	F13	IC98	H9
E9	P12	IC99	E9
E10	M8	IC100	H5
E11	M3	IC101	H5
E12	J18	IC102	H5
E13	K12	IC103	H5
E14	J3	IC104	K11
E15	F18	IC105	K10
E16	F11	IC106	K8
E17	F4	IC107	L8
E18	C18	IC108	J9
E19	C10	IC109	D9
E20	B4	IC110	H9
		IC116	H9
F1	B1	IC117	F8
F2	B1	IC118	F7
F3	B1	IC119	D9
F4	B2	IC120	D8
		IC121	D8
FB1	E11	IC122	K11
FB2	E11	IC123	F8
		IC124	G5
IC1	B19	IC125	E5
IC2	B19	IC126	G6
IC3	C15	IC127	E8
IC4	D16	IC128	G8
IC5	F1	IC129	H8
IC6	F2	IC132	H15
IC7	B5	IC133	H17
IC8	C17	IC500	A14
IC9	C16	IC501	D3
IC10	B15	IC502	B14
IC12	B6	IC503	C3
IC13	D11	IC504	C14
IC14	B16	IC505	B11
IC15	B17	IC506	B10
IC18	G1	IC507	E3
IC19	G2	IC508	E17
IC22	C19	IC509	G17
IC23	D18	IC510	H11
IC25	E13	IC511	G9
IC26	E14	IC512	K15
IC27	H2	IC513	K16
IC28	J2	IC514	K14
IC29	J1	IC515	J14
IC30	C5	IC516	K17
IC31	G14	IC517	K19
IC32	G19	IC518	P11
IC33	D19	IC519	N11
IC34	C5	IC520	J4
IC37	K1	IC521	J6
IC38	K2	IC522	P9
IC39	K1	IC524	M9
IC40	D5	IC527	C9
IC41	D6	IC528	F13
IC42	D6	IC529	L1
IC43	E16	IC530	M6
IC44	C13	IC531	K6
IC47	B8	IC532	B18
IC48	B9	IC533	B18
IC50	D11	IC534	D17
IC51	D12	IC535	D18
IC52	L9	IC536	C19
IC54	K2	IC537	E18
IC55	J3	IC538	C18
IC56	J4	IC539	D18
IC57	K2	IC540	E18
IC58	M4	IC541	E19


IC542	H18	TP17	F13
IC543	H18	TP18	G8
IC544	G18	TP500	J17
IC545	H18	TP501	K12
IC546	G18	TP502	J14
IC547	F18	TP503	C19
IC548	F19	TP504	D17
IC549	F18	TP505	D18
IC550	H18		
IC551	J11	*:B SIDE	
IC552	J13		
IC555	K2		
IC556	K3		
IC557	C4		
IC558	K9		
IC562	K4		
IC564	J11		
IC565	M2		
IC566	J10		
IC567	N6		
IC568	G15		
IC569	F3		
IC570	F11		
IC571	E19		
IC572	F19		
IC573	K13		
IC574	L11		
IC575	L10		
IC576	F9		
IC577	H7		
IC578	H4		
IC579	N5		

RB1	A16
RB2	A16
RB3	A17
RB4	A17
RB5	A17
RB6	A18
RB7	A6
RB8	A7
RB9	A7
RB10	B18
RB11	A18
RB12	B18
RB13	B18
RB14	C18
RB15	B18
RB16	D17
RB17	D17
RB18	D18
RB19	D18
RB20	C18
RB21	C19
RB22	E18
RB23	E18
RB24	C18
RB25	C18
RB26	D18
RB27	D18
RB28	E18
RB29	E18
RB30	E18
RB31	E19
RB32	H18
RB33	H18
RB34	G18
RB35	H18
RB36	G18
RB37	G18
RB38	H18
RB39	J18
RB40	E19
RB41	F18
RB42	F19
RB43	F18
RB44	F18
RB45	F18
RB46	H18
RB47	H19
RB48	H4
RB49	N5

TP1	G19
TP2	E19
TP3	H19
TP4	G18
TP5	G18
TP7	C19
TP12	E9
TP16	G11

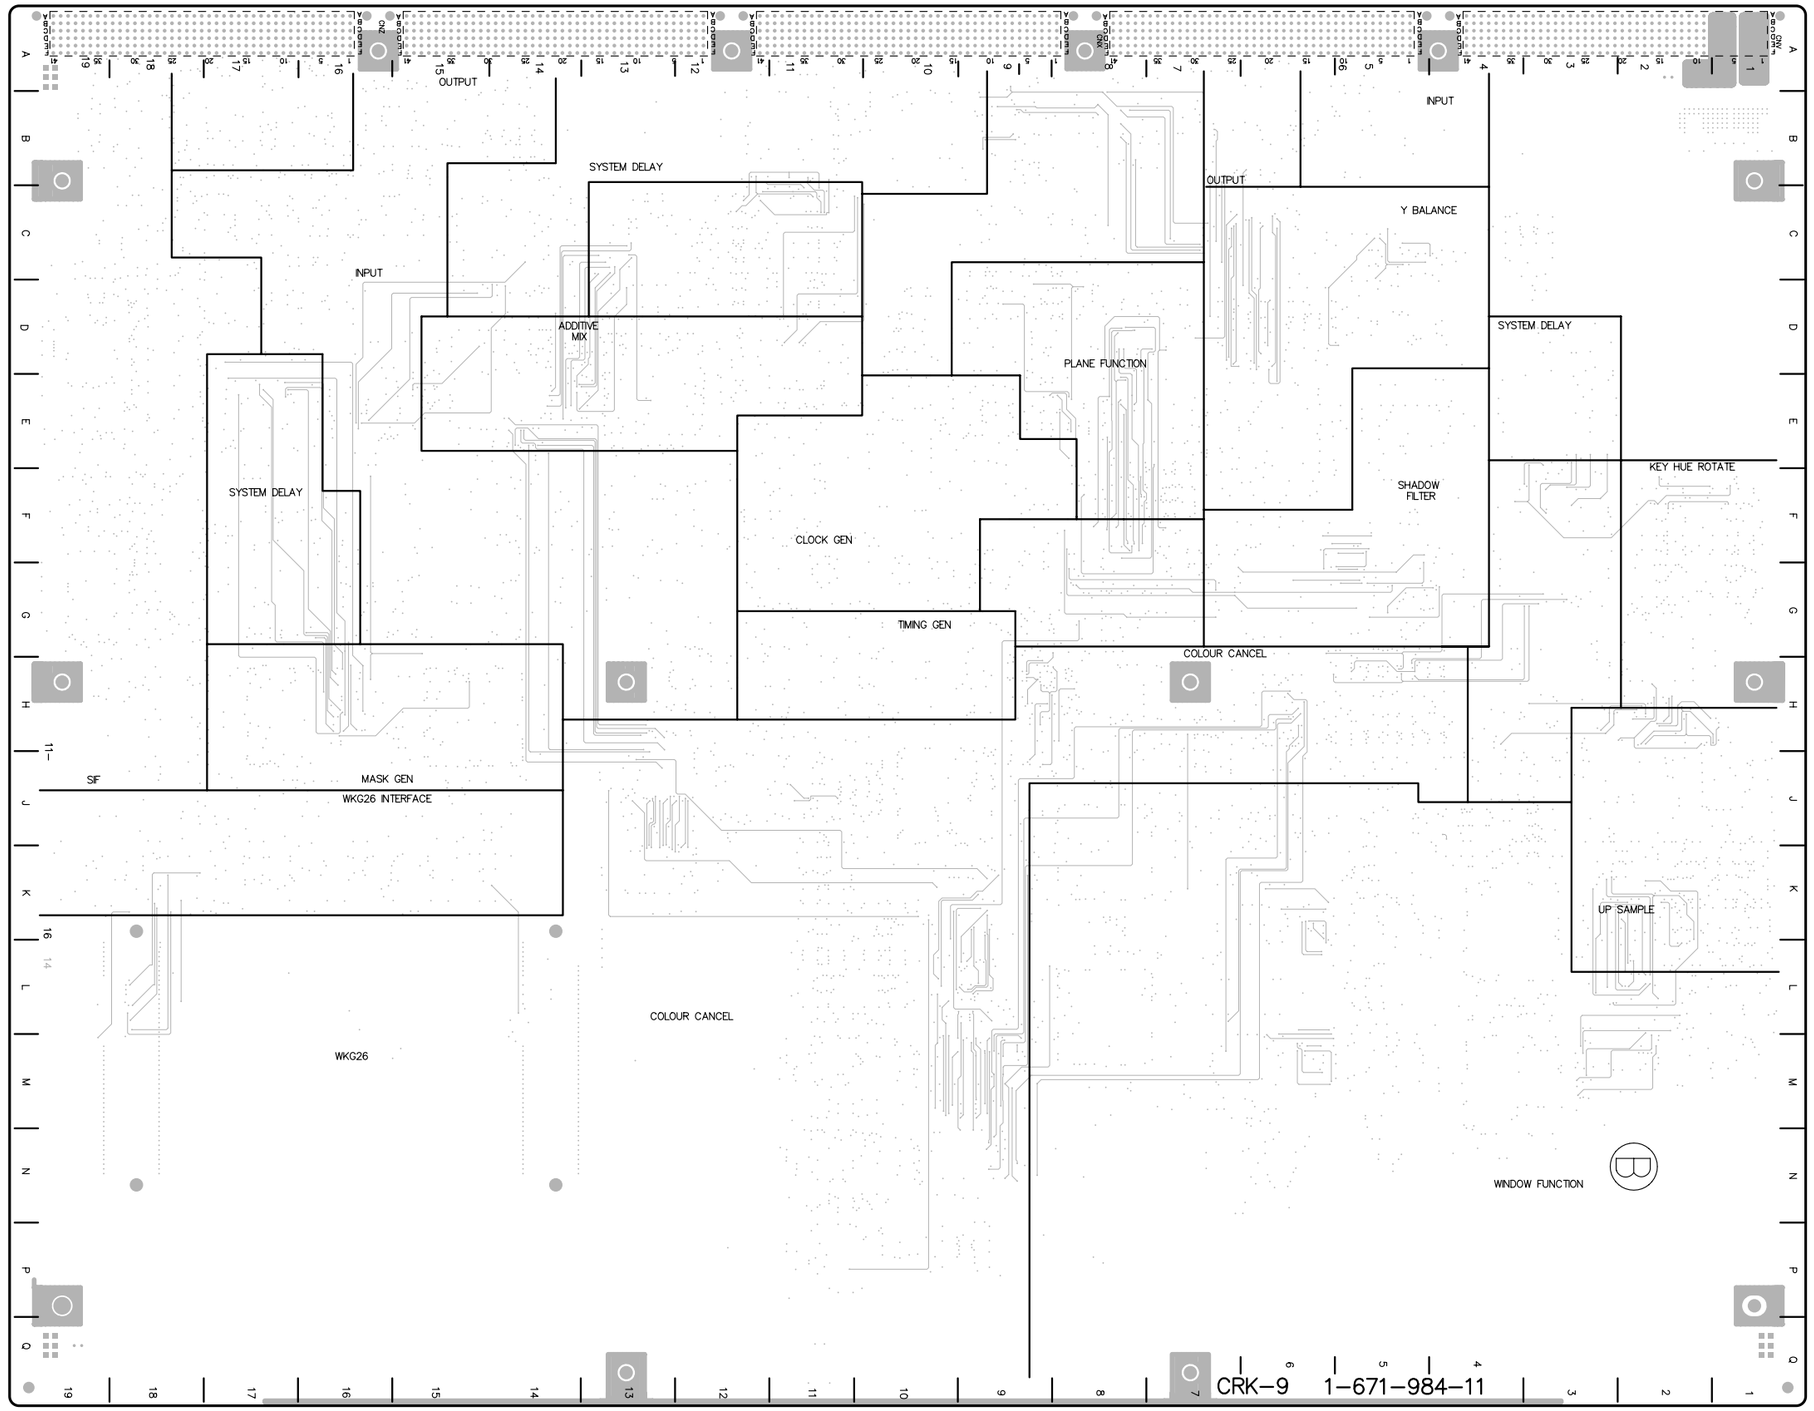

CRK-9 -B SIDE-
SUFFIX: -11

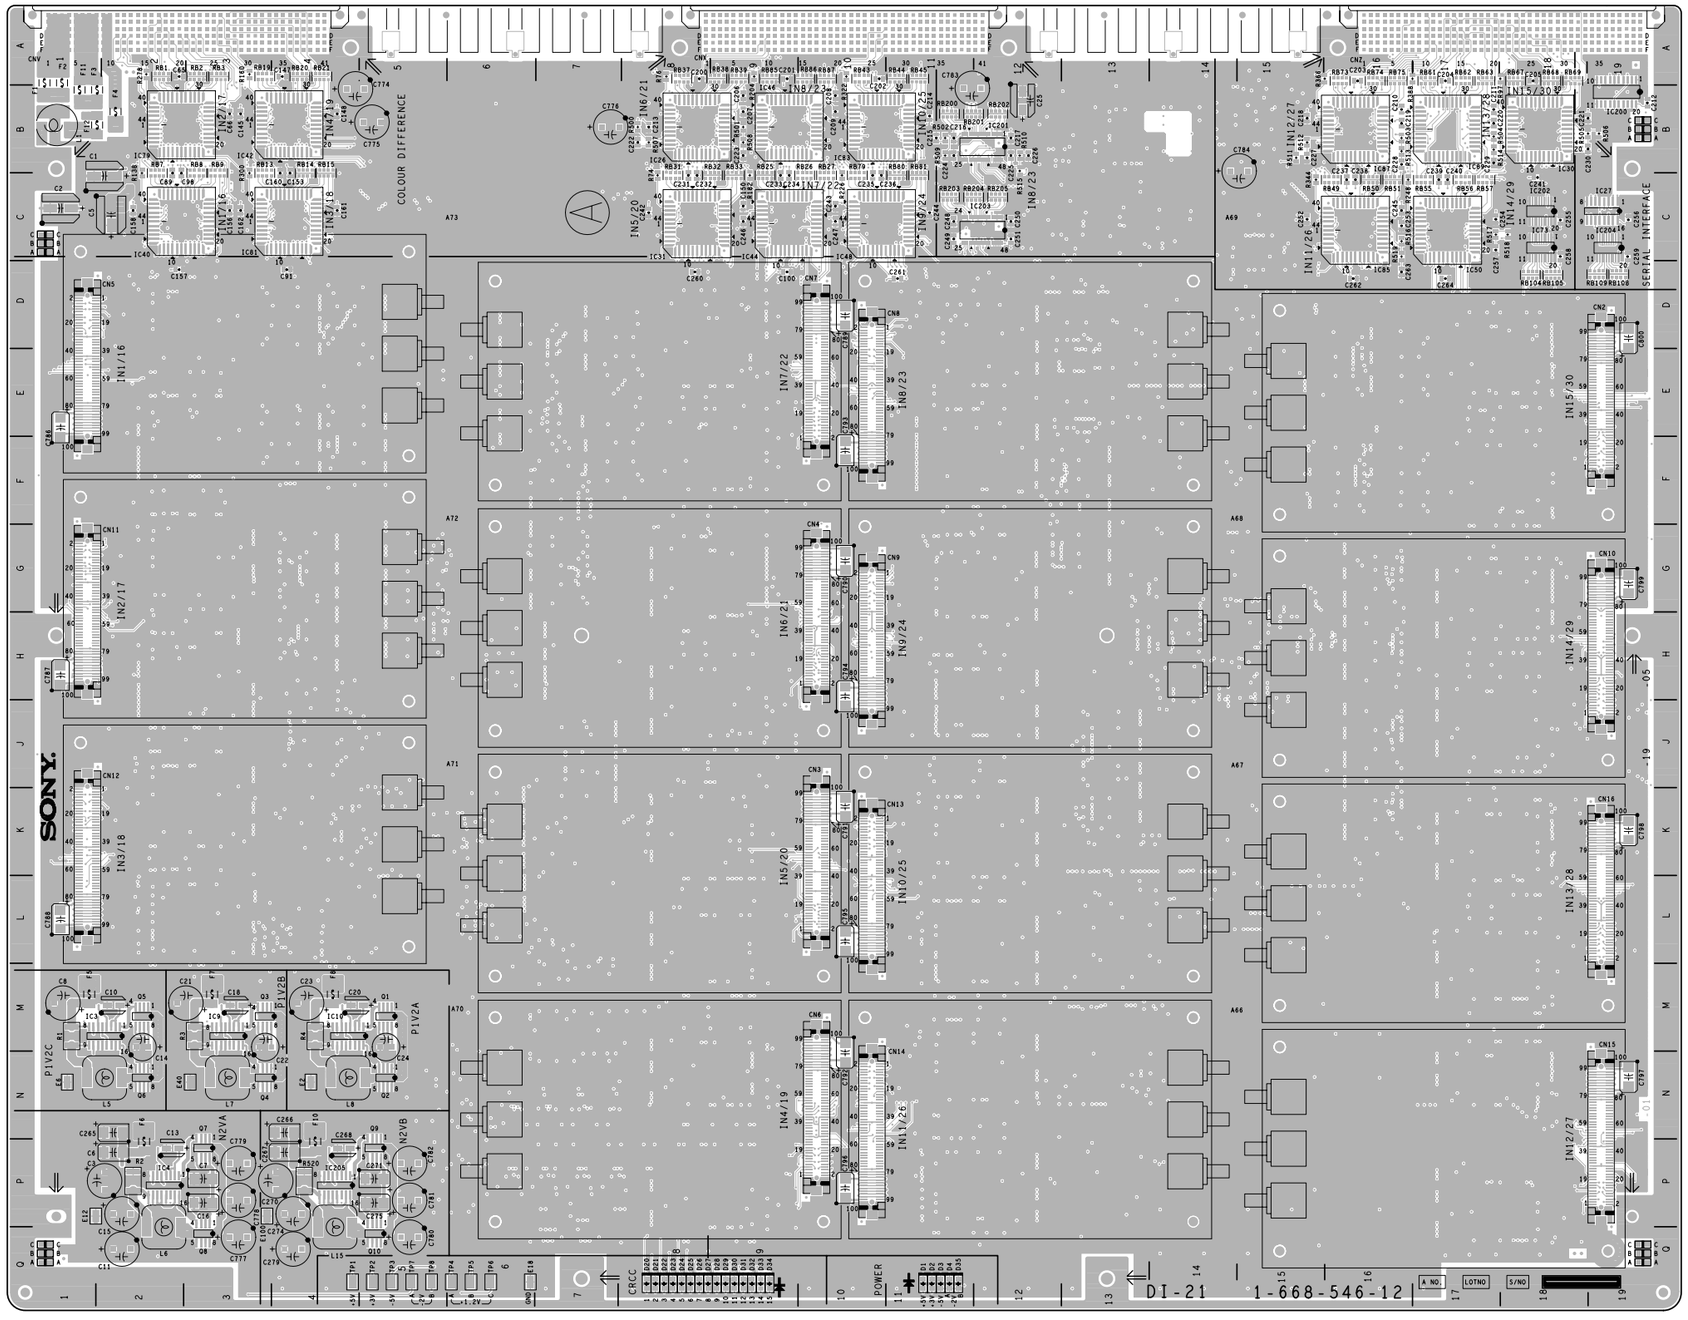


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 through 12015

DI-21 -A SIDE-
SUFFIX: -12


DI-21 (1-668-546-12)

CN2	E19	F6	P2	IC92	*H3	L6	Q2
CN3	K10	F7	M3	IC93	*K3	L7	N3
CN4	H10	F8	M4	IC94	*L3	L8	N4
CN5	E1	F10	P4	IC95	*K11	L15	Q4
CN6	N10	F11	B1	IC96	*L11		
CN7	E10	F12	B2	IC97	*N11	Q1	M5
CN8	E10			IC98	*P11	Q2	N5
CN9	H10	FB1	*B14	IC99	*P18	Q3	M3
CN10	H19	FB2	*B14	IC100	*N18	Q4	N3
CN11	G1			IC101	*M18	Q5	M2
CN12	K1	IC3	M2	IC102	*K18	Q6	N2
CN13	L10	IC4	P2	IC103	*G2	Q7	P3
CN14	N10	IC9	M3	IC104	*K2	Q8	Q3
CN15	N19	IC10	M4	IC105	*K11	Q9	P5
CN16	L19	IC13	*B12	IC106	*N11	Q10	Q5
		IC14	*B12	IC107	*P18		
D1	Q11	IC15	*D15	IC108	*L18	RB1	A2
D2	Q11	IC16	*C12	IC200	B19	RB2	A3
D3	Q11	IC17	*F18	IC201	B12	RB3	A3
D4	Q11	IC18	*D14	IC202	C18	RB4	*A3
D5	*M2	IC19	*B13	IC203	C12	RB5	*A2
D6	*P2	IC20	*E18	IC204	C19	RB6	*A2
D7	*N2	IC21	*F18	IC205	P4	RB7	C2
D8	*P2	IC22	*C8	IC206	*B15	RB8	C3
D9	*M3	IC23	*K9	IC207	*B12	RB9	C3
D10	*M4	IC24	*H9	IC208	*C13	RB10	*C3
D11	*N3	IC25	*J9	IC209	*D4	RB11	*C2
D12	*N5	IC26	B8	IC210	*D4	RB12	*C2
D20	Q8	IC27	C19	IC211	*D8	RB13	C3
D21	Q8	IC28	*G14	IC212	*D13	RB14	C4
D22	Q8	IC29	*B18	IC213	*E7	RB15	C4
D23	Q8	IC30	B18	IC214	*E15	RB16	*C4
D24	Q8	IC31	C8	IC215	*E16	RB17	*C4
D25	Q8	IC32	*L9	IC216	*E16	RB18	*C3
D26	Q8	IC33	*G9	IC217	*E7	RB19	A3
D27	Q8	IC34	*B8	IC218	*E13	RB20	A4
D28	Q9	IC36	*G15	IC219	*E4	RB21	A4
D29	Q9	IC37	*L9	IC220	*E4	RB22	*A4
D30	Q9	IC38	*H14	IC221	*F8	RB23	*A4
D31	Q9	IC39	*K5	IC222	*E14	RB24	*A3
D32	Q9	IC40	C2	IC223	*F14	RB25	C9
D33	Q9	IC41	*C2	IC224	*F15	RB26	C10
D34	Q9	IC42	B4	IC225	*F13	RB27	C10
D35	Q11	IC43	*B4	IC226	*F16	RB28	*C10
D36	*P4	IC44	C9	IC227	*F16	RB29	*C9
D37	*P4	IC45	*C9	IC228	*F7	RB30	*C9
		IC46	B9	IC229	*G13	RB31	C8
E1	*P1	IC47	*B9	IC230	*G4	RB32	C9
E2	N4	IC48	C10	IC231	*G5	RB33	C9
E3	*P13	IC49	*C10	IC232	*G7	RB34	*C9
E4	*M16	IC50	C17	IC233	*G16	RB35	*C8
E5	*D2	IC51	*C17	IC234	*G14	RB36	*C8
E6	N1	IC52	*D3	IC235	*H4	RB37	A8
E7	*K4	IC53	*F3	IC236	*H5	RB38	A9
E8	*C18	IC54	*P9	IC237	*H14	RB39	A9
E9	*D5	IC55	*N9	IC238	*H15	RB40	*A9
E10	*J2	IC56	*F9	IC239	*H16	RB41	*A8
E11	*F2	IC57	*D9	IC240	*H14	RB42	*A8
E12	P1	IC58	*D11	IC241	*H14	RB43	A10
E13	*Q3	IC59	*F11	IC242	*H15	RB44	A11
E14	*F14	IC60	*G11	IC243	*J13	RB45	A11
E15	*B5	IC61	*J11	IC244	*J16	RB46	*A11
E16	*F4	IC62	*J18	IC245	*K13	RB47	*A10
E17	*K7	IC63	*G18	IC246	*K16	RB48	*A10
E18	Q6	IC64	*E2	IC247	*L15	RB49	C16
E19	*Q11	IC65	*P9	IC248	*M7	RB50	C16
E20	*P16	IC66	*E9	IC249	*M13	RB51	C16
E21	*P19	IC67	*E11	IC250	*M13	RB52	*C16
E22	*G18	IC68	*H11	IC251	*M7	RB53	*C16
E23	*J11	IC69	*H18	IC252	*M7	RB54	*C15
E24	*F10	IC70	*P6	IC253	*N13	RB55	C17
E25	*C11	IC71	*M7	IC254	*N13	RB56	C17
E26	*E7	IC72	*L13	IC255	*N6	RB57	C17
E27	*M11	IC73	C18	IC256	*N7	RB58	*C17
E28	*K14	IC74	*L16	IC257	*N7	RB59	*C17
E29	*D19	IC75	*L14	IC258	*N7	RB60	*C16
E30	*M18	IC76	*L13	IC259	*P6	RB61	A17
E31	*K18	IC77	*N6	IC260	*P7	RB62	A17
E32	*L2	IC78	*M7	IC261	*P7	RB63	A17
E33	*C15	IC79	B2	IC262	*P7	RB64	*A17
E34	*M6	IC80	*B2	IC263	*P7	RB65	*A17
E38	*E13	IC81	C4	IC264	*P7	RB66	*A16
E39	*M13	IC82	*C4	IC265	*P7	RB67	A18
E40	N3	IC83	B10	IC300	*J4	RB68	A18
E41	*C7	IC84	*B10	IC301	*H6	RB69	A18
E100	P3	IC85	C16	IC302	*J7	RB70	*A18
		IC86	*C16	IC303	*L4	RB71	*A18
F1	A1	IC87	B16	IC304	*L6	RB72	*A18
F2	A1	IC88	*B16	IC305	*K6	RB73	A16
F3	B2	IC89	B17			RB74	A16
F4	B2	IC90	*B17	L1	B1	RB75	A16
F5	M1	IC91	*G3	L5	N2	RB76	*A16

RB77	*A16	RB254	*F8	RB346	*K17	TP35	*L18
RB78	*A15	RB255	*E12	RB347	*K8	TP36	*K18
RB79	C10	RB256	*F13	RB348	*K12	TP37	*E18
RB80	C11	RB257	*F15	RB349	*K17	TP38	*D18
RB81	C11	RB258	*F16	RB350	*L3	TP39	*P18
RB82	*C11	RB259	*F17	RB351	*L3	TP40	*M18
RB83	*C10	RB260	*F3	RB352	*L8	TP41	*H11
RB84	*C10	RB261	*F4	RB353	*L12	TP42	*J11
RB85	A9	RB262	*F5	RB354	*L3	TP43	*G14
RB86	A10	RB263	*F7	RB355	*L8	TP44	*K15
RB87	A10	RB264	*F7	RB356	*L12	TP45	*K15
RB88	*A10	RB265	*F8	RB357	*L17	TP46	*K15
RB89	*A9	RB266	*F12	RB358	*M8	TP47	*K15
RB90	*A9	RB267	*F13	RB359	*M12	TP48	*C18
RB102	*L13	RB268	*F15	RB360	*L17	TP49	*D13
RB103	*L14	RB269	*F16	RB361	*M17	TP50	*D13
RB104	D18	RB270	*F17	RB362	*M8	TP51	*N6
RB105	D18	RB271	*F7	RB363	*M12	TP52	*N6
RB106	*M13	RB272	*F12	RB364	*N17	TP53	*N6
RB107	*M14	RB273	*F13	RB365	*N8	TP54	*N5
RB108	D19	RB274	*F15	RB366	*N12	TP55	*N5
RB109	D19	RB275	*F16	RB367	*N17	TP56	*N5
RB112	*M13	RB276	*F17	RB368	*N8	TP57	*N6
RB113	*M13	RB277	*G5	RB369	*N12	TP58	*N6
RB114	*N13	RB278	*G7	RB370	*N17	TP59	*P6
RB115	*N13	RB279	*G13	RB371	*P8	TP60	*P6
RB116	*L13	RB280	*G3	RB372	*P12	TP61	*P6
RB117	*L13	RB281	*G4	RB373	*P8	TP62	*P5
RB118	*L14	RB282	*G5	RB374	*P12	TP63	*P5
RB119	*L14	RB283	*G7	RB375	*P17	TP64	*P6
RB132	*E13	RB284	*G8	RB376	*P8	TP65	*P6
RB133	*E14	RB285	*G12	RB377	*P12	TP66	*M8
RB134	*E14	RB286	*G13	RB378	*P17	TP67	*M8
RB135	*E14	RB287	*G16	RB379	*Q17	TP68	*M7
RB136	*C11	RB288	*G3	RB400	*J4	TP69	*M7
RB137	*C11	RB289	*G4	RB401	*J4	TP70	*N7
RB138	*C12	RB290	*G5	RB402	*J4	TP71	*N7
RB139	*C12	RB291	*G7	RB403	*H4	TP72	*N7
RB200	B11	RB292	*G8	RB404	*K7	TP73	*N8
RB201	B11	RB293	*G13	RB405	*J7	TP74	*M7
RB202	B12	RB294	*G16	RB406	*J7	TP75	*M7
RB203	C11	RB295	*G17	RB407	*J7	TP76	*M7
RB204	C11	RB296	*G3	RB408	*H7	TP77	*M6
RB205	C12	RB297	*G4	RB409	*H7	TP78	*N6
RB206	*D3	RB298	*G5	RB410	*H7	TP79	*N7
RB207	*D4	RB299	*G7	RB411	*H7	TP80	*N7
RB208	*D5	RB300	*G8	RB412	*M4	TP99	*E2
RB209	*D6	RB301	*G12	RB413	*L4		
RB210	*D7	RB302	*H12	RB414	*L4	*:B SIDE	
RB211	*D8	RB303	*G16	RB415	*L4		
RB212	*D12	RB304	*G17	RB416	*L6		
RB213	*D12	RB305	*H4	RB417	*L6		
RB214	*D13	RB306	*H4	RB418	*L6		
RB215	*D13	RB307	*H5	RB419	*L6		
RB216	*D3	RB308	*H16	RB420	*K6		
RB217	*D4	RB309	*H17	RB421	*K6		
RB218	*D4	RB310	*H3	RB422	*K6		
RB219	*D5	RB311	*H4	RB423	*K6		
RB220	*D5	RB312	*H5				
RB221	*D6	RB313	*H16	TP1	Q4		
RB222	*D7	RB314	*H3	TP2	Q5		
RB223	*D8	RB315	*H8	TP3	Q5		
RB224	*D12	RB316	*H12	TP4	Q6		
RB225	*D15	RB317	*H16	TP5	Q6		
RB226	*D16	RB318	*J3	TP6	Q6		
RB227	*D17	RB319	*H8	TP7	Q5		
RB228	*E3	RB320	*J12	TP8	Q5		
RB229	*E6	RB321	*J13	TP10	*H2		
RB230	*E7	RB322	*J16	TP11	*E3		
RB231	*E8	RB323	*H17	TP12	*F2		
RB232	*E12	RB324	*J17	TP13	*J2		
RB233	*E15	RB325	*J8	TP14	*F3		
RB234	*E16	RB326	*J12	TP15	*E2		
RB235	*E17	RB327	*J13	TP16	*F2		
RB236	*E6	RB328	*J16	TP17	*K2		
RB237	*E12	RB329	*J13	TP18	*M2		
RB238	*E13	RB330	*J16	TP19	*N9		
RB239	*E13	RB331	*J17	TP20	*M9		
RB240	*E15	RB332	*J3	TP21	*E9		
RB241	*E16	RB333	*K13	TP22	*D9		
RB242	*E17	RB334	*J16	TP23	*L9		
RB243	*E3	RB335	*K3	TP24	*J9		
RB244	*E4	RB336	*K8	TP25	*H9		
RB245	*E5	RB337	*K8	TP26	*G9		
RB246	*E6	RB338	*K12	TP27	*L11		
RB247	*E7	RB339	*K13	TP28	*M11		
RB248	*E8	RB340	*K16	TP29	*E11		
RB249	*F3	RB341	*K17	TP30	*F11		
RB250	*F4	RB342	*K3	TP31	*N11		
RB251	*F5	RB343	*K12	TP32	*Q11		
RB252	*F6	RB344	*K13	TP33	*H18		
RB253	*F7	RB345	*K16	TP34	*G18		

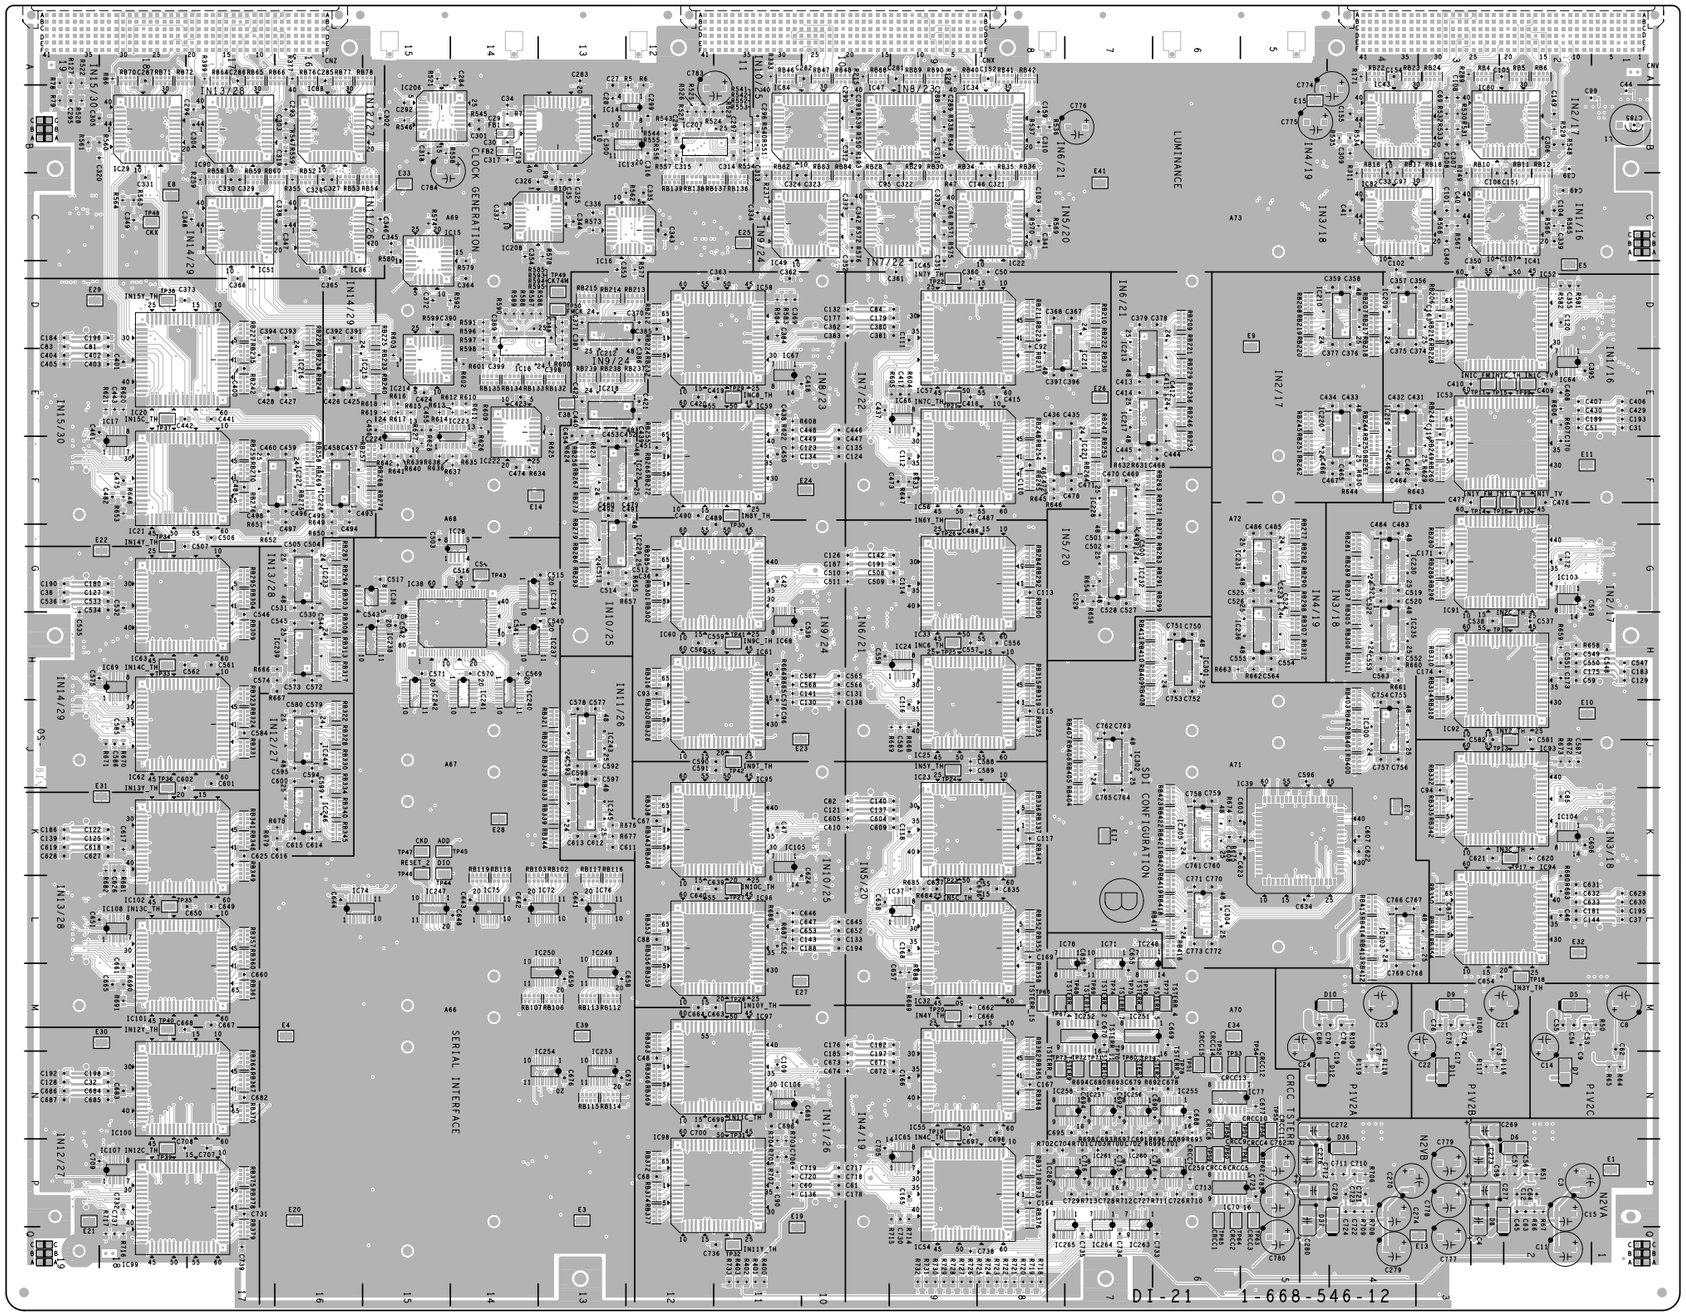

DI-21 -B SIDE-
SUFFIX: -12

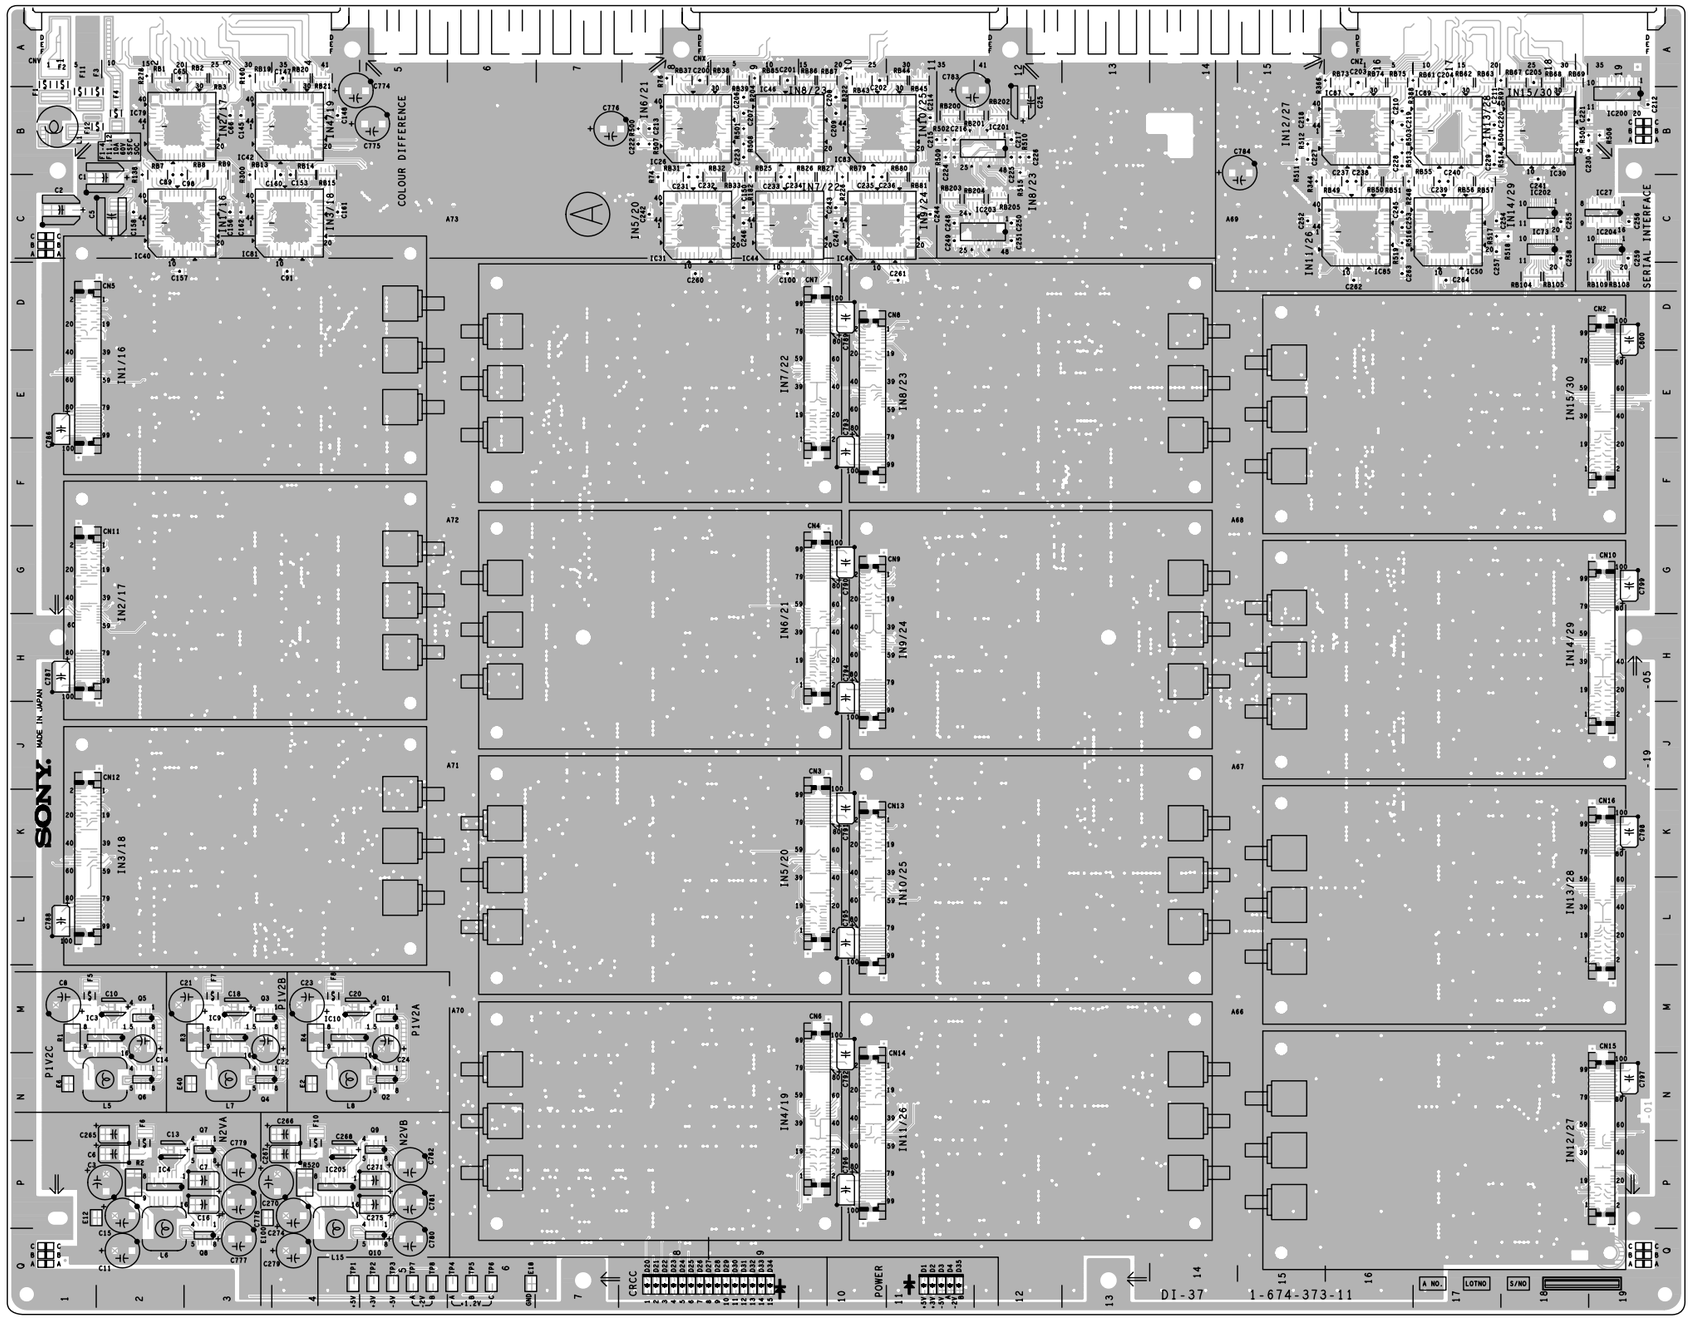


HDS-7000 (SY) : S/N 12016 and Higher

DI-37 -A SIDE-
SUFFIX: -11


DI-37 (1-674-373-11)

CN2	E19	F6	P2	IC92	*H3	L6	Q2
CN3	K10	F7	M3	IC93	*K3	L7	N3
CN4	H10	F8	M4	IC94	*L3	L8	N4
CN5	E1	F10	P4	IC95	*K11	L15	Q4
CN6	N10	F11	B1	IC96	*L11		
CN7	E10	F12	B2	IC97	*N11	Q1	M5
CN8	E10			IC98	*P11	Q2	N5
CN9	H10	FB1	*B14	IC99	*P18	Q3	M3
CN10	H19	FB2	*B14	IC100	*N18	Q4	N3
CN11	G1			IC101	*M18	Q5	M2
CN12	K1	IC3	M2	IC102	*K18	Q6	N2
CN13	L10	IC4	P2	IC103	*G2	Q7	P3
CN14	N10	IC9	M3	IC104	*K2	Q8	Q3
CN15	N19	IC10	M4	IC105	*K11	Q9	P5
CN16	L19	IC13	*B12	IC106	*N11	Q10	Q5
		IC14	*B12	IC107	*P18		
D1	Q11	IC15	*D15	IC108	*L18	RB1	A2
D2	Q11	IC16	*C12	IC200	B19	RB2	A3
D3	Q11	IC17	*F18	IC201	B12	RB3	A3
D4	Q11	IC18	*D14	IC202	C18	RB4	*A3
D5	*M2	IC19	*B13	IC203	C12	RB5	*A2
D6	*P2	IC20	*E18	IC204	C19	RB6	*A2
D7	*N2	IC21	*F18	IC205	P4	RB7	C2
D8	*P2	IC22	*C8	IC206	*B15	RB8	C3
D9	*M3	IC23	*K9	IC207	*B12	RB9	C3
D10	*M4	IC24	*H9	IC208	*C13	RB10	*C3
D11	*N3	IC25	*J9	IC209	*D4	RB11	*C2
D12	*N5	IC26	B8	IC210	*D4	RB12	*C2
D20	Q8	IC27	C19	IC211	*D8	RB13	C3
D21	Q8	IC28	*G14	IC212	*D13	RB14	C4
D22	Q8	IC29	*B18	IC213	*E7	RB15	C4
D23	Q8	IC30	B18	IC214	*E15	RB16	*C4
D24	Q8	IC31	C8	IC215	*E16	RB17	*C4
D25	Q8	IC32	*L9	IC216	*E16	RB18	*C3
D26	Q8	IC33	*G9	IC217	*E7	RB19	A3
D27	Q8	IC34	*B8	IC218	*E13	RB20	A4
D28	Q9	IC36	*G15	IC219	*E4	RB21	A4
D29	Q9	IC37	*L9	IC220	*E4	RB22	*A4
D30	Q9	IC38	*H14	IC221	*F8	RB23	*A4
D31	Q9	IC39	*K5	IC222	*E14	RB24	*A3
D32	Q9	IC40	C2	IC223	*F14	RB25	C9
D33	Q9	IC41	*C2	IC224	*F15	RB26	C10
D34	Q9	IC42	B4	IC225	*F13	RB27	C10
D35	Q11	IC43	*B4	IC226	*F16	RB28	*C10
D36	*P4	IC44	C9	IC227	*F16	RB29	*C9
D37	*P4	IC45	*C9	IC228	*F7	RB30	*C9
		IC46	B9	IC229	*G13	RB31	C8
E1	*P1	IC47	*B9	IC230	*G4	RB32	C9
E2	N4	IC48	C10	IC231	*G5	RB33	C9
E3	*P13	IC49	*C10	IC232	*G7	RB34	*C9
E4	*M16	IC50	C17	IC233	*G16	RB35	*C8
E5	*D2	IC51	*C17	IC234	*G14	RB36	*C8
E6	N1	IC52	*D3	IC235	*H4	RB37	A8
E7	*K4	IC53	*F3	IC236	*H5	RB38	A9
E8	*C18	IC54	*P9	IC237	*H14	RB39	A9
E9	*D5	IC55	*N9	IC238	*H15	RB40	*A9
E10	*J2	IC56	*F9	IC239	*H16	RB41	*A8
E11	*F2	IC57	*D9	IC240	*H14	RB42	*A8
E12	P1	IC58	*D11	IC241	*H14	RB43	A10
E13	*Q3	IC59	*F11	IC242	*H15	RB44	A11
E14	*F14	IC60	*G11	IC243	*J13	RB45	A11
E15	*B5	IC61	*J11	IC244	*J16	RB46	*A11
E16	*F4	IC62	*J18	IC245	*K13	RB47	*A10
E17	*K7	IC63	*G18	IC246	*K16	RB48	*A10
E18	Q6	IC64	*E2	IC247	*L15	RB49	C16
E19	*Q11	IC65	*P9	IC248	*M7	RB50	C16
E20	*P16	IC66	*E9	IC249	*M13	RB51	C16
E21	*P19	IC67	*E11	IC250	*M13	RB52	*C16
E22	*G18	IC68	*H11	IC251	*M7	RB53	*C16
E23	*J11	IC69	*H18	IC252	*M7	RB54	*C15
E24	*F10	IC70	*P6	IC253	*N13	RB55	C17
E25	*C11	IC71	*M7	IC254	*N13	RB56	C17
E26	*E7	IC72	*L13	IC255	*N6	RB57	C17
E27	*M11	IC73	C18	IC256	*N7	RB58	*C17
E28	*K14	IC74	*L16	IC257	*N7	RB59	*C17
E29	*D19	IC75	*L14	IC258	*N8	RB60	*C16
E30	*M18	IC76	*L13	IC259	*P6	RB61	A17
E31	*K18	IC77	*N6	IC260	*P7	RB62	A17
E32	*L2	IC78	*M8	IC261	*P7	RB63	A17
E33	*C15	IC79	B2	IC262	*P8	RB64	*A17
E34	*M6	IC80	*B2	IC263	*P7	RB65	*A17
E38	*E13	IC81	C4	IC264	*P7	RB66	*A16
E39	*M13	IC82	*C4	IC265	*P8	RB67	A18
E40	N3	IC83	B10	IC300	*J4	RB68	A18
E41	*C7	IC84	*B10	IC301	*H6	RB69	A18
E100	P3	IC85	C16	IC302	*J7	RB70	*A18
		IC86	*C16	IC303	*L4	RB71	*A18
F1	A1	IC87	B16	IC304	*L6	RB72	*A18
F2	A1	IC88	*B16	IC305	*K6	RB73	A16
F3	B2	IC89	B17			RB74	A16
F4	B2	IC90	*B17	L1	B1	RB75	A16
F5	M1	IC91	*G3	L5	N2	RB76	*A16


RB77	*A16	RB254	*F8	RB346	*K17	TP35	*L18
RB78	*A15	RB255	*E12	RB347	*K8	TP36	*K18
RB79	C10	RB256	*F13	RB348	*K12	TP37	*E18
RB80	C11	RB257	*F15	RB349	*K17	TP38	*D18
RB81	C11	RB258	*F16	RB350	*L3	TP39	*P18
RB82	*C11	RB259	*F17	RB351	*L3	TP40	*M18
RB83	*C10	RB260	*F3	RB352	*L8	TP41	*H11
RB84	*C10	RB261	*F4	RB353	*L12	TP42	*J11
RB85	A9	RB262	*F5	RB354	*L3	TP43	*G14
RB86	A10	RB263	*F7	RB355	*L8	TP44	*K15
RB87	A10	RB264	*F7	RB356	*L12	TP45	*K15
RB88	*A10	RB265	*F8	RB357	*L17	TP46	*K15
RB89	*A9	RB266	*F12	RB358	*M8	TP47	*K15
RB90	*A9	RB267	*F13	RB359	*M12	TP48	*C18
RB102	*L13	RB268	*F15	RB360	*L17	TP49	*D13
RB103	*L14	RB269	*F16	RB361	*M17	TP50	*D13
RB104	D18	RB270	*F17	RB362	*M8	TP51	*N6
RB105	D18	RB271	*F7	RB363	*M12	TP52	*N6
RB106	*M13	RB272	*F12	RB364	*N17	TP53	*N6
RB107	*M14	RB273	*F13	RB365	*N8	TP54	*N5
RB108	D19	RB274	*F15	RB366	*N12	TP55	*N5
RB109	D19	RB275	*F16	RB367	*N17	TP56	*N5
RB112	*M13	RB276	*F17	RB368	*N8	TP57	*N6
RB113	*M13	RB277	*G5	RB369	*N12	TP58	*N6
RB114	*N13	RB278	*G7	RB370	*N17	TP59	*P6
RB115	*N13	RB279	*G13	RB371	*P8	TP60	*P6
RB116	*L13	RB280	*G3	RB372	*P12	TP61	*P6
RB117	*L13	RB281	*G4	RB373	*P8	TP62	*P5
RB118	*L14	RB282	*G5	RB374	*P12	TP63	*P5
RB119	*L14	RB283	*G7	RB375	*P17	TP64	*P6
RB132	*E13	RB284	*G8	RB376	*P8	TP65	*P6
RB133	*E14	RB285	*G12	RB377	*P12	TP66	*M8
RB134	*E14	RB286	*G13	RB378	*P17	TP67	*M8
RB135	*E14	RB287	*G16	RB379	*Q17	TP68	*M7
RB136	*C11	RB288	*G3	RB400	*J4	TP69	*M7
RB137	*C11	RB289	*G4	RB401	*J4	TP70	*N7
RB138	*C12	RB290	*G5	RB402	*J4	TP71	*N7
RB139	*C12	RB291	*G7	RB403	*H4	TP72	*N7
RB200	B11	RB292	*G8	RB404	*K7	TP73	*N8
RB201	B11	RB293	*G13	RB405	*J7	TP74	*M7
RB202	B12	RB294	*G16	RB406	*J7	TP75	*M7
RB203	C11	RB295	*G17	RB407	*J7	TP76	*M7
RB204	C11	RB296	*G3	RB408	*H7	TP77	*M6
RB205	C12	RB297	*G4	RB409	*H7	TP78	*N6
RB206	*D3	RB298	*G5	RB410	*H7	TP79	*N7
RB207	*D4	RB299	*G7	RB411	*H7	TP80	*N7
RB208	*D5	RB300	*G8	RB412	*M4	TP99	*E2
RB209	*D6	RB301	*G12	RB413	*L4		
RB210	*D7	RB302	*H12	RB414	*L4	*:B SIDE	
RB211	*D8	RB303	*G16	RB415	*L4		
RB212	*D12	RB304	*G17	RB416	*L6		
RB213	*D12	RB305	*H4	RB417	*L6		
RB214	*D13	RB306	*H4	RB418	*L6		
RB215	*D13	RB307	*H5	RB419	*L6		
RB216	*D3	RB308	*H16	RB420	*K6		
RB217	*D4	RB309	*H17	RB421	*K6		
RB218	*D4	RB310	*H3	RB422	*K6		
RB219	*D5	RB311	*H4	RB423	*K6		
RB220	*D5	RB312	*H5				
RB221	*D6	RB313	*H16	TP1	Q4		
RB222	*D7	RB314	*H3	TP2	Q5		
RB223	*D8	RB315	*H8	TP3	Q5		
RB224	*D12	RB316	*H12	TP4	Q6		
RB225	*D15	RB317	*H16	TP5	Q6		
RB226	*D16	RB318	*J3	TP6	Q6		
RB227	*D17	RB319	*H8	TP7	Q5		
RB228	*E3	RB320	*J12	TP8	Q5		
RB229	*E6	RB321	*J13	TP10	*H2		
RB230	*E7	RB322	*J16	TP11	*E3		
RB231	*E8	RB323	*H17	TP12	*F2		
RB232	*E12	RB324	*J17	TP13	*J2		
RB233	*E15	RB325	*J8	TP14	*F3		
RB234	*E16	RB326	*J12	TP15	*E2		
RB235	*E17	RB327	*J13	TP16	*F2		
RB236	*E6	RB328	*J16	TP17	*K2		
RB237	*E12	RB329	*J13	TP18	*M2		
RB238	*E13	RB330	*J16	TP19	*N9		
RB239	*E13	RB331	*J17	TP20	*M9		
RB240	*E15	RB332	*J3	TP21	*E9		
RB241	*E16	RB333	*K13	TP22	*D9		
RB242	*E17	RB334	*J16	TP23	*L9		
RB243	*E3	RB335	*K3	TP24	*J9		
RB244	*E4	RB336	*K8	TP25	*H9		
RB245	*E5	RB337	*K8	TP26	*G9		
RB246	*E6	RB338	*K12	TP27	*L11		
RB247	*E7	RB339	*K13	TP28	*M11		
RB248	*E8	RB340	*K16	TP29	*E11		
RB249	*F3	RB341	*K17	TP30	*F11		
RB250	*F4	RB342	*K3	TP31	*N11		
RB251	*F5	RB343	*K12	TP32	*Q11		
RB252	*F6	RB344	*K13	TP33	*H18		
RB253	*F7	RB345	*K16	TP34	*G18		

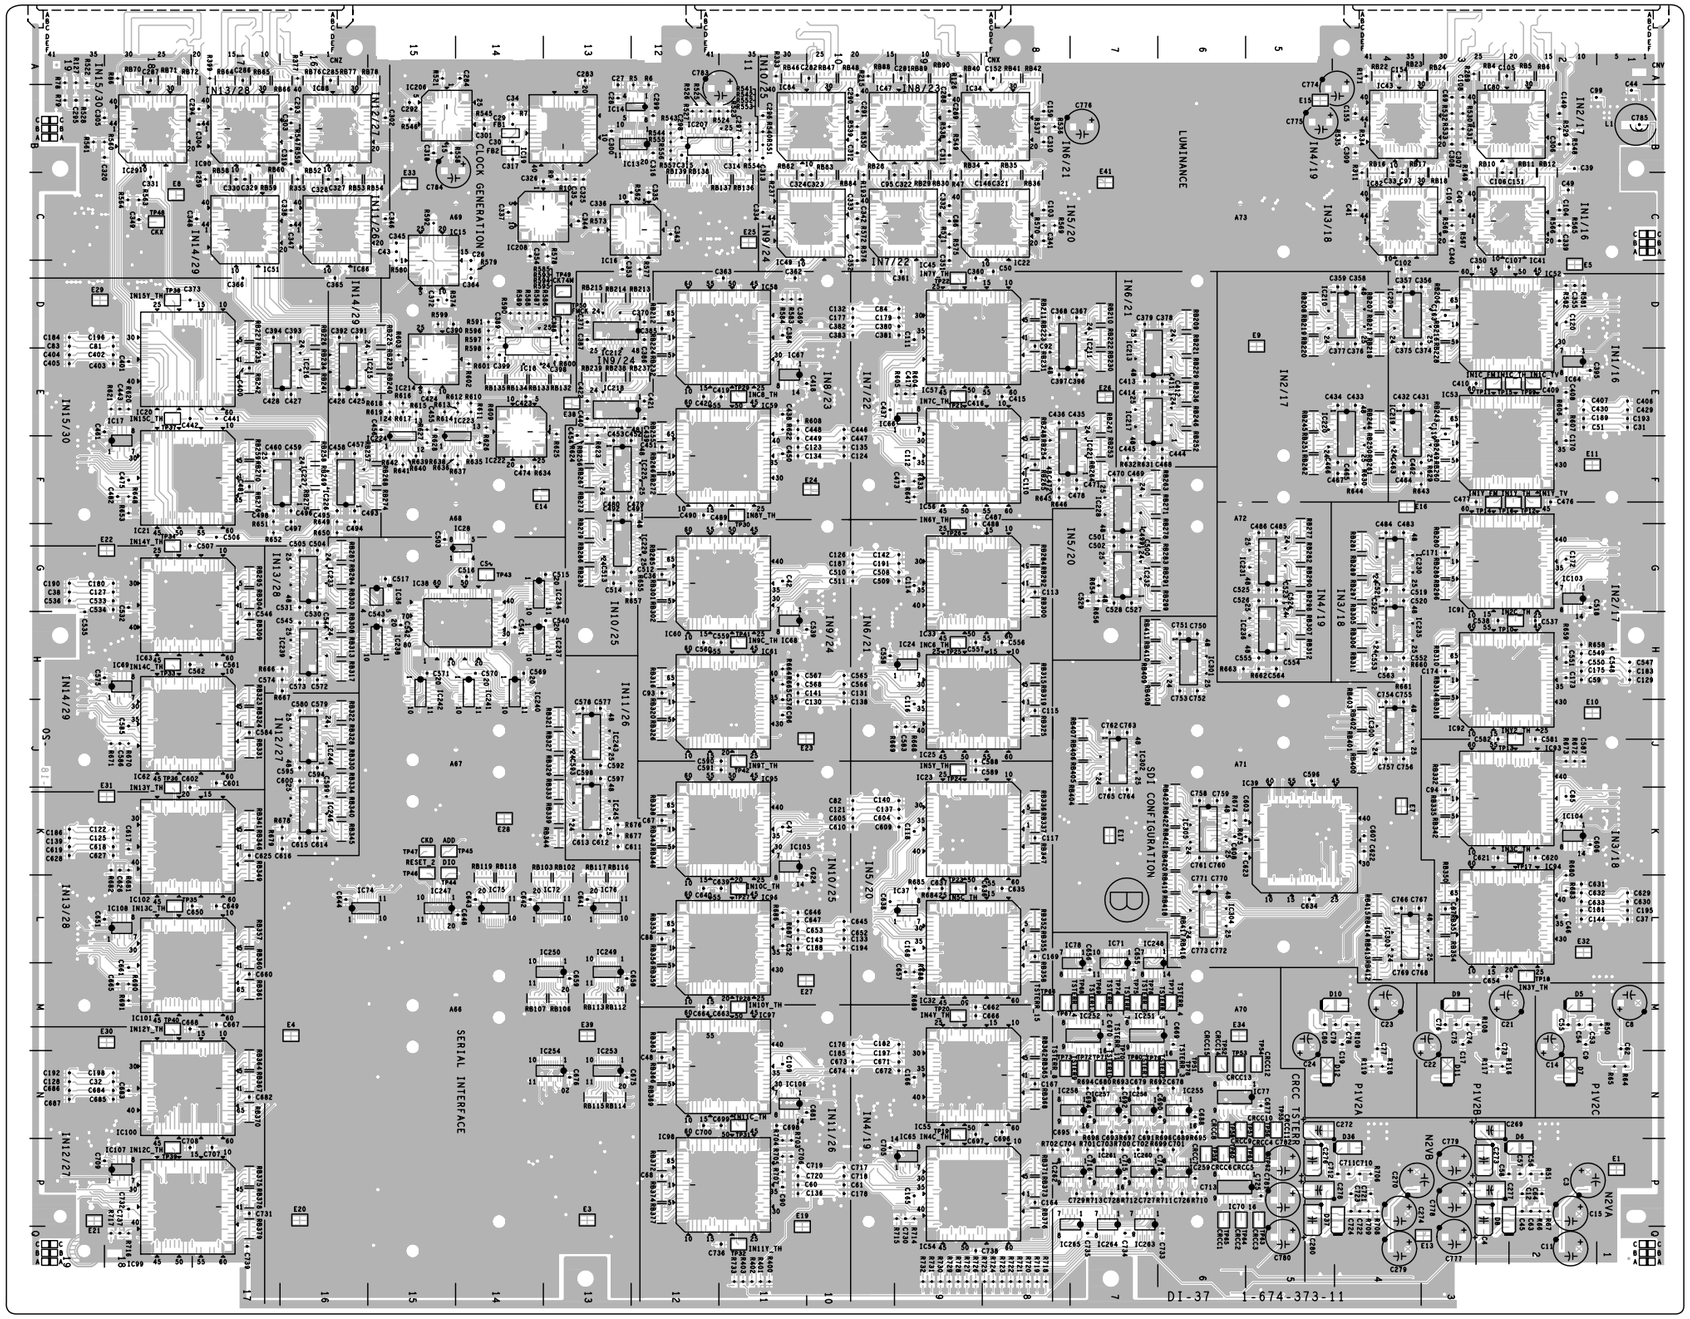

DI-37 -B SIDE-
SUFFIX: -11

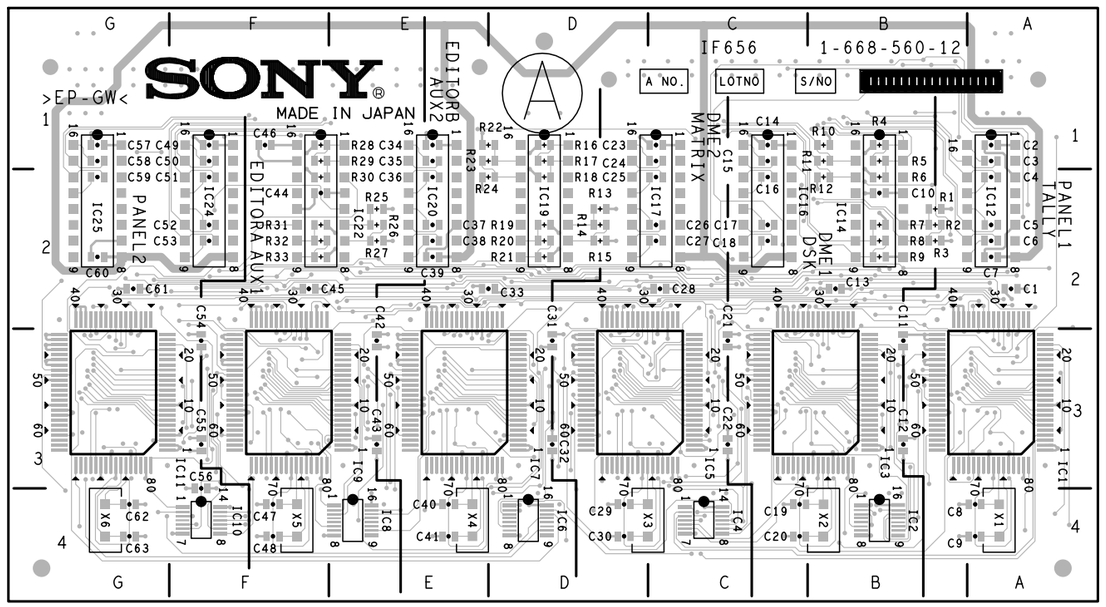

IF-656 -A SIDE-
SUFFIX: -12

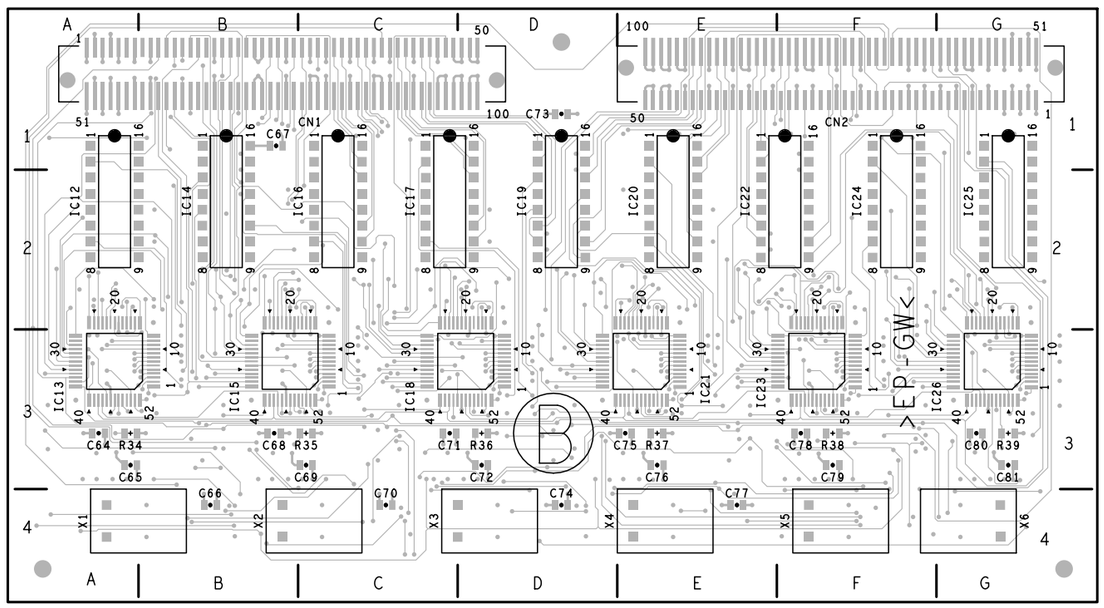


IF-656 -B SIDE-
SUFFIX: -12

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

IF-656 (1-668-560-12)

CN1	*B1
CN2	*F1
IC1	A3
IC2	B4
IC3	B3
IC4	C4
IC5	D3
IC6	D4
IC7	E3
IC8	E4
IC9	F3
IC10	F4
IC11	G3
IC12	*A1
IC13	*A3
IC14	*B1
IC15	*B3
IC16	*C1
IC17	*C1
IC18	*D3
IC19	*D1
IC20	*E1
IC21	*E3
IC22	*E1
IC23	*F3
IC24	*F1
IC25	*G1
IC26	*G3
X1	*A4
X2	*B4
X3	*C4
X4	*E4
X5	*F4
X6	*G4

*:B SIDE

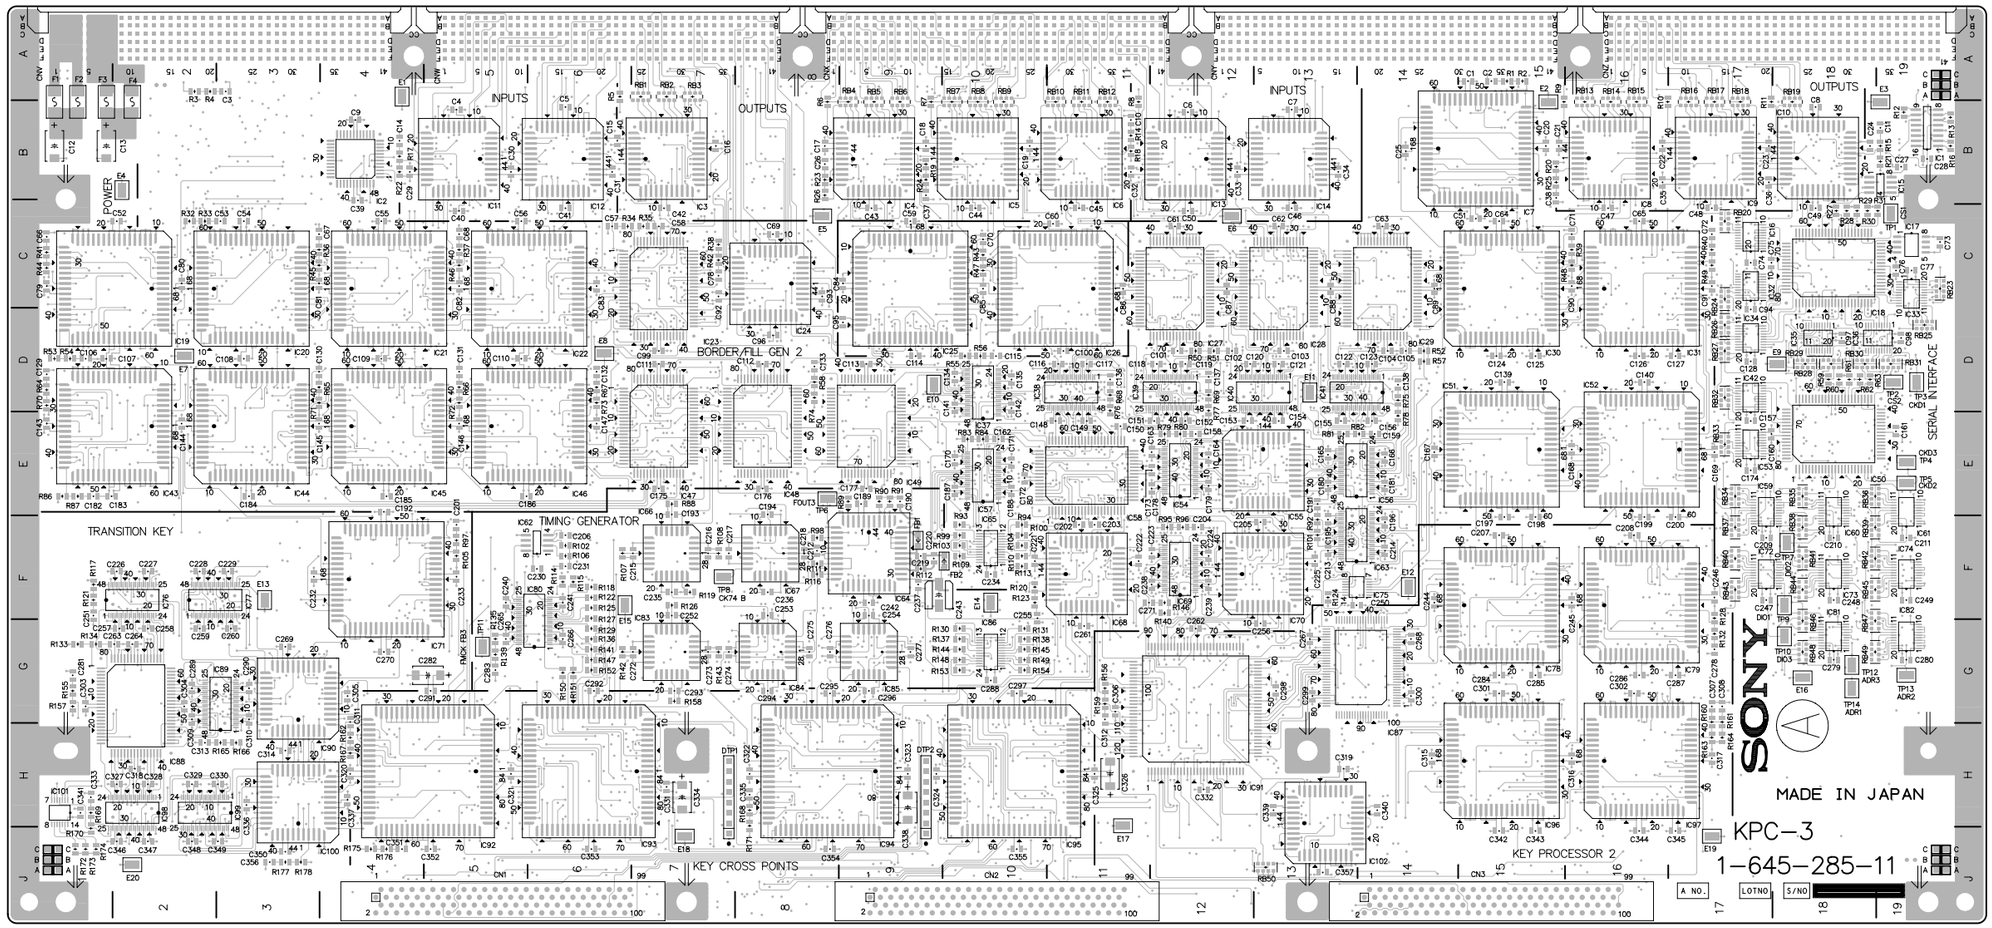

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 through 12015

KPC-3 -A SIDE-


SUFFIX: -11

KPC-3 (1-645-285-11)


CN1	J5	IC40	D13
CN2	J10	IC41	D13
CN3	J15	IC42	D17
		IC43	E2
E1	A4	IC44	E3
E2	B15	IC45	E4
E3	B19	IC46	E6
E4	B2	IC47	E7
E5	C8	IC48	E8
E6	C12	IC49	E9
E7	D2	IC50	E18
E8	D6	IC51	E15
E9	D18	IC52	E16
E10	D9	IC53	E17
E11	D13	IC54	E12
E12	F14	IC55	E13
E13	F3	IC56	E13
E14	F10	IC57	E10
E15	F6	IC58	E11
E16	G18	IC59	E17
E17	H11	IC60	E18
E18	J7	IC61	E19
E19	J17	IC62	F6
E20	J2	IC63	F13
E21	*A4	IC64	F9
E22	*B15	IC65	F10
E23	*B19	IC66	F7
E24	*B2	IC67	F8
E25	*C8	IC68	F11
E26	*C12	IC69	F12
E27	*D6	IC70	F13
E28	*D2	IC71	F4
E29	*D18	IC72	F17
E30	*D9	IC73	F18
E31	*D13	IC74	F19
E32	*F14	IC75	F14
E33	*F3	IC76	F2
E34	*F10	IC77	F2
E35	*F6	IC78	F15
E36	*G18	IC79	F16
E37	*H11	IC80	G6
E38	*J7	IC81	G18
E39	*J17	IC82	G19
E40	*J2	IC83	G7
		IC84	G8
F1	B1	IC85	G9
F2	B1	IC86	G10
F3	B1	IC87	G14
F4	B2	IC88	G2
		IC89	G3
FB1	F9	IC90	G3
FB2	F10	IC91	G12
		IC92	H5
IC1	B19	IC93	H6
IC2	B4	IC94	H8
IC3	B7	IC95	H10
IC4	B9	IC96	H15
IC5	B10	IC97	H16
IC6	B11	IC98	H2
IC7	B15	IC99	H2
IC8	B16	IC100	H3
IC9	B17	IC101	H1
IC10	B18	IC102	H13
IC11	B5	IC103	*B3
IC12	B6	IC104	*B15
IC13	B12	IC105	*B18
IC14	B13	IC106	*B19
IC15	B19	IC107	*B5
IC16	C17	IC108	*B6
IC17	C19	IC109	*B7
IC18	C18	IC110	*B8
IC19	C2	IC111	*B9
IC20	C3	IC112	*B10
IC21	C4	IC113	*B11
IC22	C6	IC114	*B12
IC23	C7	IC115	*C18
IC24	C8	IC116	*C2
IC25	C9	IC117	*C3
IC26	C11	IC118	*C4
IC27	C12	IC119	*C6
IC28	C13	IC120	*C7
IC29	C14	IC121	*C8
IC30	C15	IC122	*C9
IC31	C16	IC123	*C11
IC32	C17	IC124	*C12
IC33	C19	IC125	*C13
IC34	D17	IC126	*C14
IC35	D18	IC127	*C15
IC36	D19	IC128	*C16
IC37	D10	IC129	*C17
IC38	D11	IC130	*D18
IC39	D12	IC131	*D19

IC132	*D10	RB41	F18
IC133	*D11	RB42	F18
IC134	*D12	RB43	F17
IC135	*D13	RB44	F18
IC136	*D13	RB45	F18
IC137	*E18	RB46	G18
IC138	*E19	RB47	G18
IC139	*E2	RB48	G18
IC140	*E3	RB49	G18
IC141	*E4	RB50	J13
IC142	*E6	RB51	*A7
IC143	*E7	RB52	*A8
IC144	*E8	RB53	*A8
IC145	*E9	RB54	*B9
IC146	*E15	RB55	*B9
IC147	*E16	RB56	*B9
IC148	*E18	RB57	*B10
IC149	*E19	RB58	*B10
IC150	*E10	RB59	*B10
IC151	*E11	RB60	*B11
IC152	*E12	RB61	*B11
IC153	*E13	RB62	*B11
IC154	*E13	RB63	*B12
IC155	*E17	RB64	*B12
IC156	*E18	RB65	*B12
IC157	*E19	RB66	*B18
IC158	*F13	RB67	*B18
IC159	*F12	RB68	*B18
IC160	*F4	RB69	*B18
IC161	*F11	RB70	*C17
IC162	*F13	RB71	*C17
IC163	*F17	RB72	*D18
IC164	*F18	RB73	*D18
IC165	*F19	RB74	*D18
IC166	*F14	RB75	*D19
IC167	*F15	RB76	*E17
IC168	*F16	RB77	*E18
IC169	*G18	RB78	*E18
IC170	*G19	RB79	*F17
IC171	*G8	RB80	*F18
IC172	*G9	RB81	*F18
IC173	*G14	RB82	*F17
IC174	*G3	RB83	*F18
IC175	*G3	RB84	*F18
IC176	*G12	RB85	*F17
IC177	*H15	RB86	*F18
IC178	*H16	RB87	*F18
IC179	*H5	RB88	*G18
IC180	*H6	RB89	*G18
IC181	*H8	RB90	*G18
IC182	*H10	RB91	*G18
IC183	*H3	RB92	*J13
IC184	*H13		

		TP1	C19
RB1	A7	TP2	D19
RB2	A7	TP3	D19
RB3	A7	TP4	E19
RB4	B9	TP5	E19
RB5	B9	TP6	E8
RB6	B9	TP7	F18
RB7	B10	TP8	F7
RB8	B10	TP9	F18
RB9	B10	TP10	G18
RB10	B11	TP11	G5
RB11	B11	TP12	G18
RB12	B11	TP13	G19
RB13	B16	TP14	G18
RB14	B16	TP15	*C18
RB15	B16		
RB16	B17	*:B SIDE	
RB17	B17		
RB18	B17		
RB19	B18		
RB20	C17		
RB23	C19		
RB24	C17		
RB25	D19		
RB26	D17		
RB27	D17		
RB28	D18		
RB29	D18		
RB30	D18		
RB31	D19		
RB32	D17		
RB33	E17		
RB34	E17		
RB35	E18		
RB36	E18		
RB37	F17		
RB38	F18		
RB39	F18		
RB40	F17		

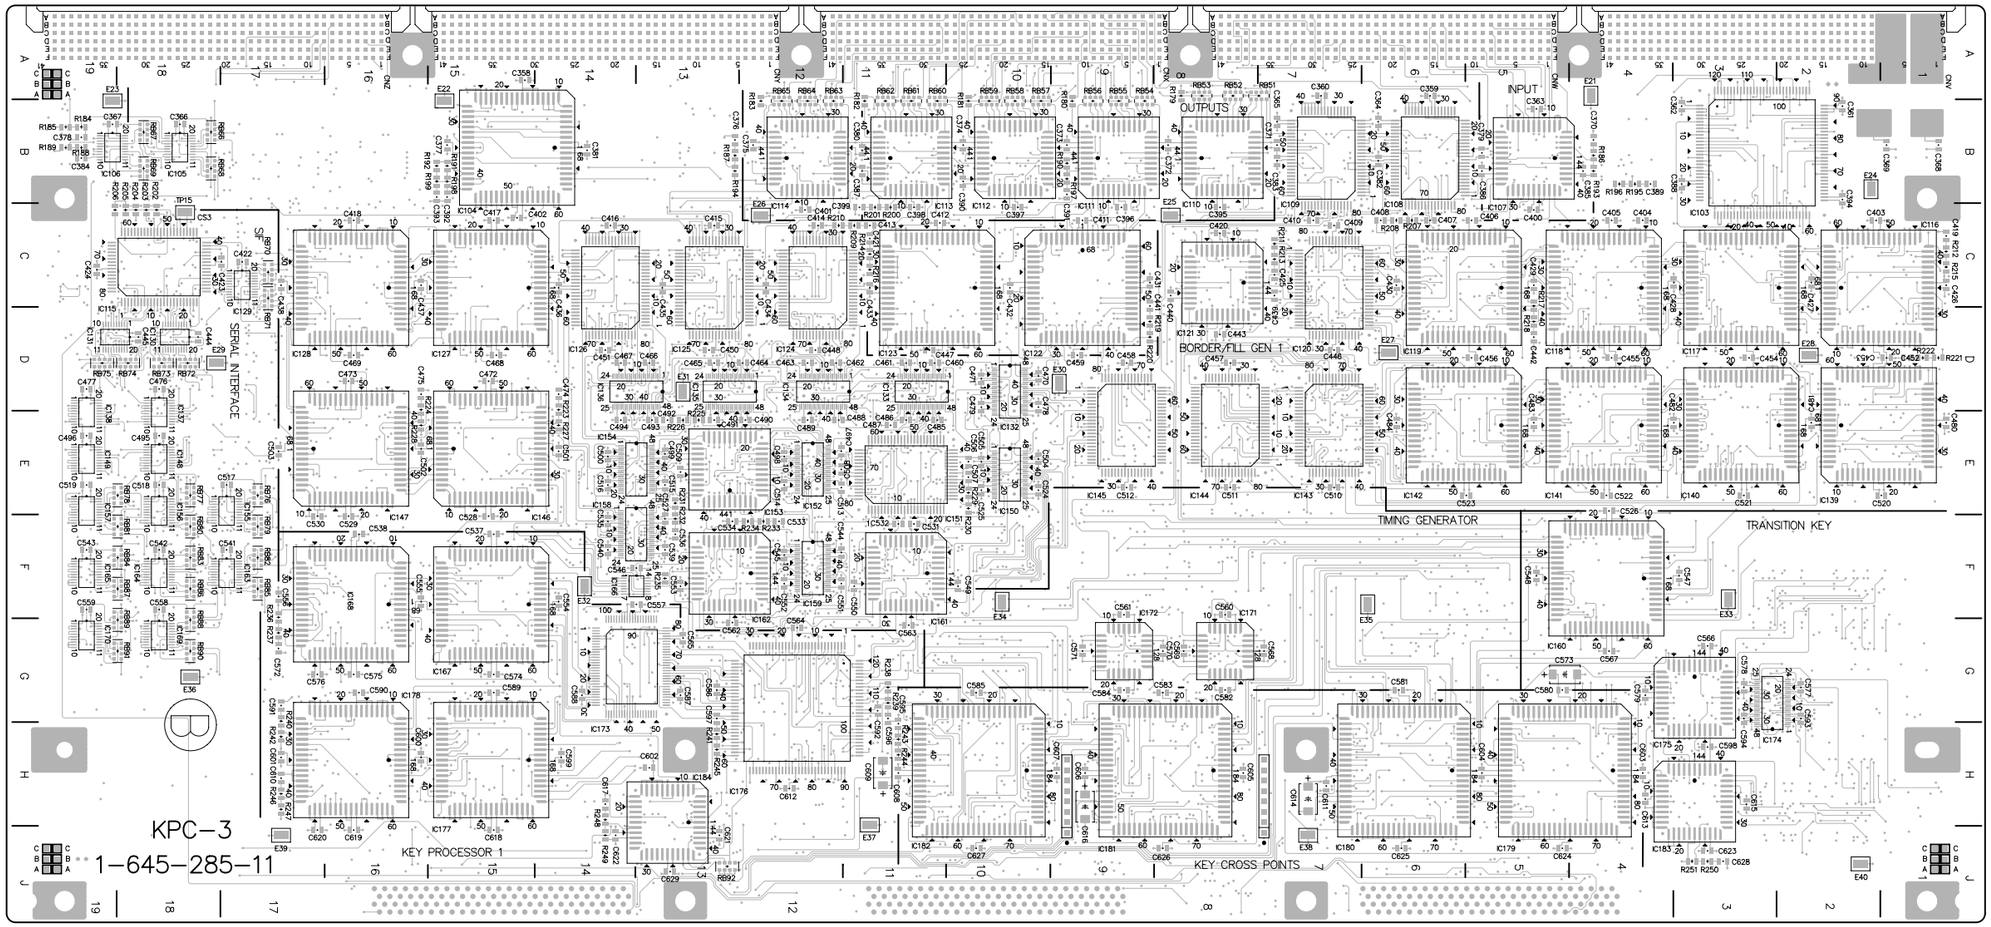

KPC-3 -B SIDE-
SUFFIX: -11

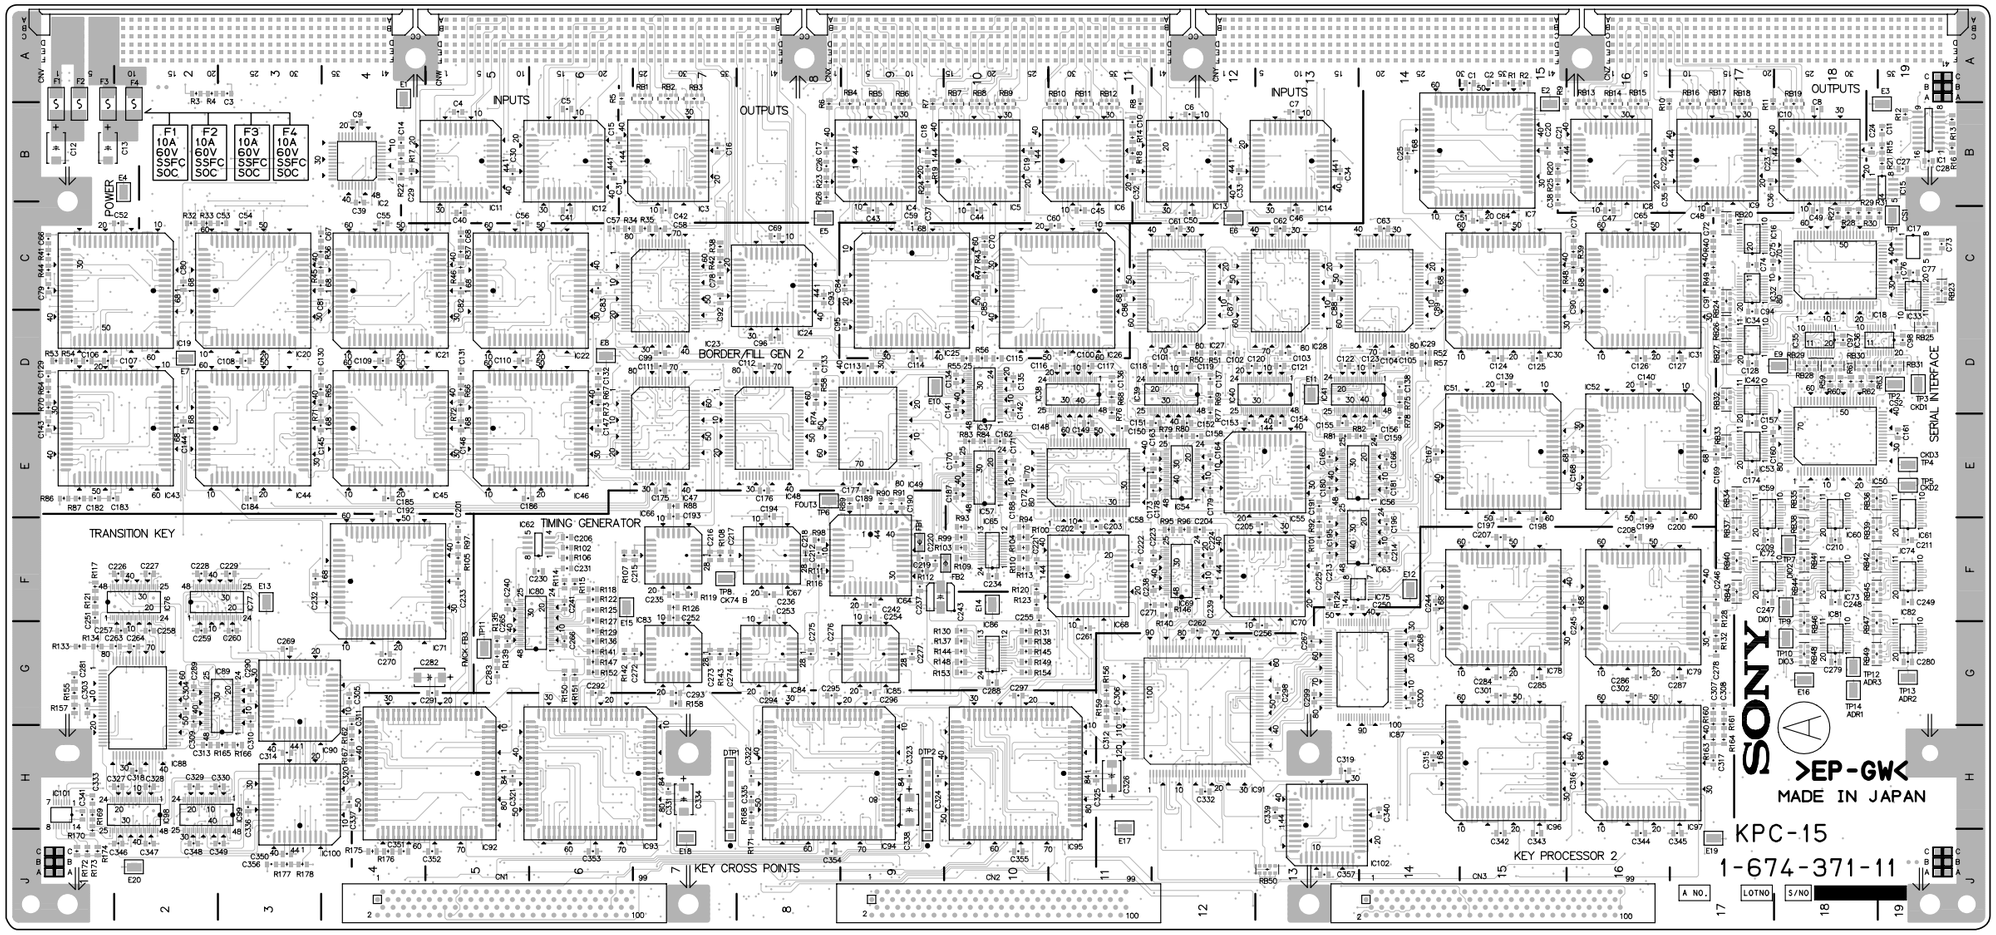


HDS-7000 (SY) : S/N 12016 and Higher

KPC-15 -A SIDE-
SUFFIX: -11


KPC-15 (1-674-371-11)

CN1	J5	IC40	D13
CN2	J10	IC41	D13
CN3	J15	IC42	D17
		IC43	E2
E1	A4	IC44	E3
E2	B15	IC45	E4
E3	B19	IC46	E6
E4	B2	IC47	E7
E5	C8	IC48	E8
E6	C12	IC49	E9
E7	D2	IC50	E18
E8	D6	IC51	E15
E9	D18	IC52	E16
E10	D9	IC53	E17
E11	D13	IC54	E12
E12	F14	IC55	E13
E13	F3	IC56	E13
E14	F10	IC57	E10
E15	F6	IC58	E11
E16	G18	IC59	E17
E17	H11	IC60	E18
E18	J7	IC61	E19
E19	J17	IC62	F6
E20	J2	IC63	F13
E21	*A4	IC64	F9
E22	*B15	IC65	F10
E23	*B19	IC66	F7
E24	*B2	IC67	F8
E25	*C8	IC68	F11
E26	*C12	IC69	F12
E27	*D6	IC70	F13
E28	*D2	IC71	F4
E29	*D18	IC72	F17
E30	*D9	IC73	F18
E31	*D13	IC74	F19
E32	*F14	IC75	F14
E33	*F3	IC76	F2
E34	*F10	IC77	F2
E35	*F6	IC78	F15
E36	*G18	IC79	F16
E37	*H11	IC80	G6
E38	*J7	IC81	G18
E39	*J17	IC82	G19
E40	*J2	IC83	G7
		IC84	G8
F1	B1	IC85	G9
F2	B1	IC86	G10
F3	B1	IC87	G14
F4	B2	IC88	G2
		IC89	G3
FB1	F9	IC90	G3
FB2	F10	IC91	G12
		IC92	H5
IC1	B19	IC93	H6
IC2	B4	IC94	H8
IC3	B7	IC95	H10
IC4	B9	IC96	H15
IC5	B10	IC97	H16
IC6	B11	IC98	H2
IC7	B15	IC99	H2
IC8	B16	IC100	H3
IC9	B17	IC101	H1
IC10	B18	IC102	H13
IC11	B5	IC103	*B3
IC12	B6	IC104	*B15
IC13	B12	IC105	*B18
IC14	B13	IC106	*B19
IC15	B19	IC107	*B5
IC16	C17	IC108	*B6
IC17	C19	IC109	*B7
IC18	C18	IC110	*B8
IC19	C2	IC111	*B9
IC20	C3	IC112	*B10
IC21	C4	IC113	*B11
IC22	C6	IC114	*B12
IC23	C7	IC115	*C18
IC24	C8	IC116	*C2
IC25	C9	IC117	*C3
IC26	C11	IC118	*C4
IC27	C12	IC119	*C6
IC28	C13	IC120	*C7
IC29	C14	IC121	*C8
IC30	C15	IC122	*C9
IC31	C16	IC123	*C11
IC32	C17	IC124	*C12
IC33	C19	IC125	*C13
IC34	D17	IC126	*C14
IC35	D18	IC127	*C15
IC36	D19	IC128	*C16
IC37	D10	IC129	*C17
IC38	D11	IC130	*D18
IC39	D12	IC131	*D19

IC132	*D10	RB41	F18
IC133	*D11	RB42	F18
IC134	*D12	RB43	F17
IC135	*D13	RB44	F18
IC136	*D13	RB45	F18
IC137	*E18	RB46	G18
IC138	*E19	RB47	G18
IC139	*E2	RB48	G18
IC140	*E3	RB49	G18
IC141	*E4	RB50	J13
IC142	*E6	RB51	*A7
IC143	*E7	RB52	*A8
IC144	*E8	RB53	*A8
IC145	*E9	RB54	*B9
IC146	*E15	RB55	*B9
IC147	*E16	RB56	*B9
IC148	*E18	RB57	*B10
IC149	*E19	RB58	*B10
IC150	*E10	RB59	*B10
IC151	*E11	RB60	*B11
IC152	*E12	RB61	*B11
IC153	*E13	RB62	*B11
IC154	*E13	RB63	*B12
IC155	*E17	RB64	*B12
IC156	*E18	RB65	*B12
IC157	*E19	RB66	*B18
IC158	*F13	RB67	*B18
IC159	*F12	RB68	*B18
IC160	*F4	RB69	*B18
IC161	*F11	RB70	*C17
IC162	*F13	RB71	*C17
IC163	*F17	RB72	*D18
IC164	*F18	RB73	*D18
IC165	*F19	RB74	*D18
IC166	*F14	RB75	*D19
IC167	*F15	RB76	*E17
IC168	*F16	RB77	*E18
IC169	*G18	RB78	*E18
IC170	*G19	RB79	*F17
IC171	*G8	RB80	*F18
IC172	*G9	RB81	*F18
IC173	*G14	RB82	*F17
IC174	*G3	RB83	*F18
IC175	*G3	RB84	*F18
IC176	*G12	RB85	*F17
IC177	*H15	RB86	*F18
IC178	*H16	RB87	*F18
IC179	*H5	RB88	*G18
IC180	*H6	RB89	*G18
IC181	*H8	RB90	*G18
IC182	*H10	RB91	*G18
IC183	*H3	RB92	*J13
IC184	*H13		
		TP1	C19
RB1	A7	TP2	D19
RB2	A7	TP3	D19
RB3	A7	TP4	E19
RB4	B9	TP5	E19
RB5	B9	TP6	E8
RB6	B9	TP7	F18
RB7	B10	TP8	F7
RB8	B10	TP9	F18
RB9	B10	TP10	G18
RB10	B11	TP11	G5
RB11	B11	TP12	G18
RB12	B11	TP13	G19
RB13	B16	TP14	G18
RB14	B16	TP15	*C18
RB15	B16		
RB16	B17	*:B SIDE	
RB17	B17		
RB18	B17		
RB19	B18		
RB20	C17		
RB23	C19		
RB24	C17		
RB25	D19		
RB26	D17		
RB27	D17		
RB28	D18		
RB29	D18		
RB30	D18		
RB31	D19		
RB32	D17		
RB33	E17		
RB34	E17		
RB35	E18		
RB36	E18		
RB37	F17		
RB38	F18		
RB39	F18		
RB40	F17		

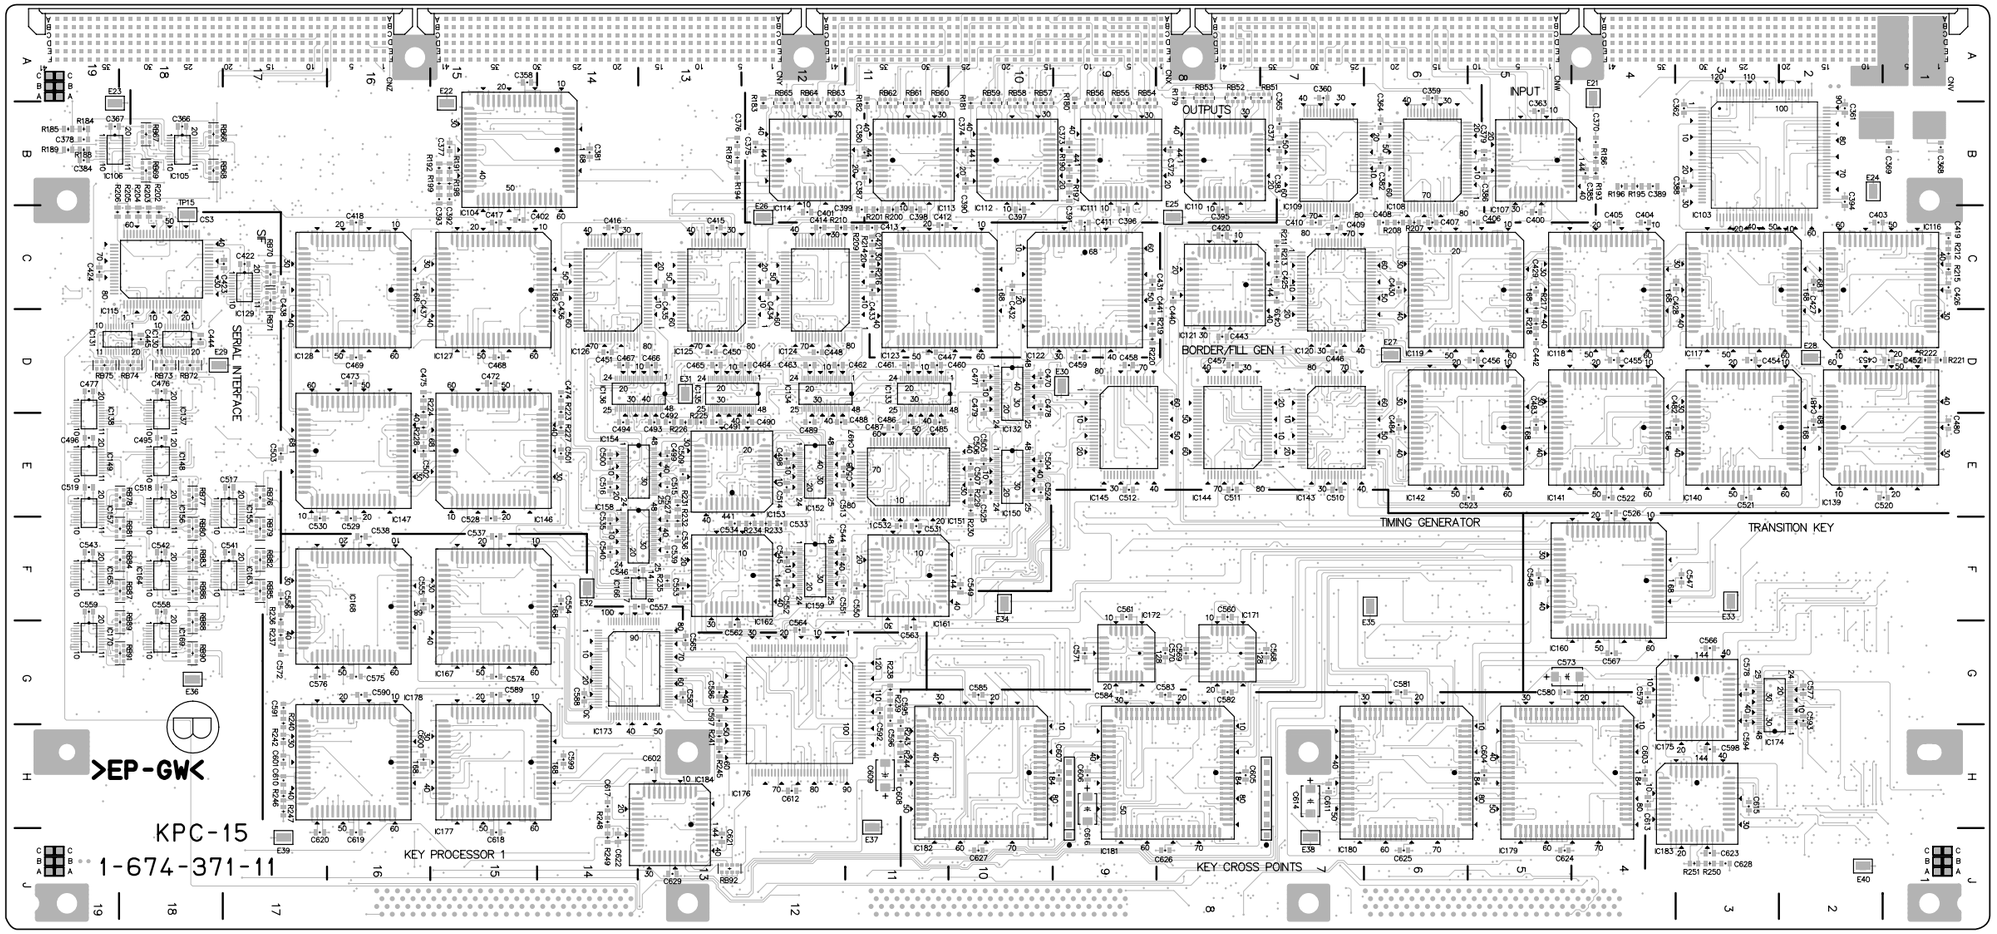

KPC-15 -B SIDE-
SUFFIX: -11

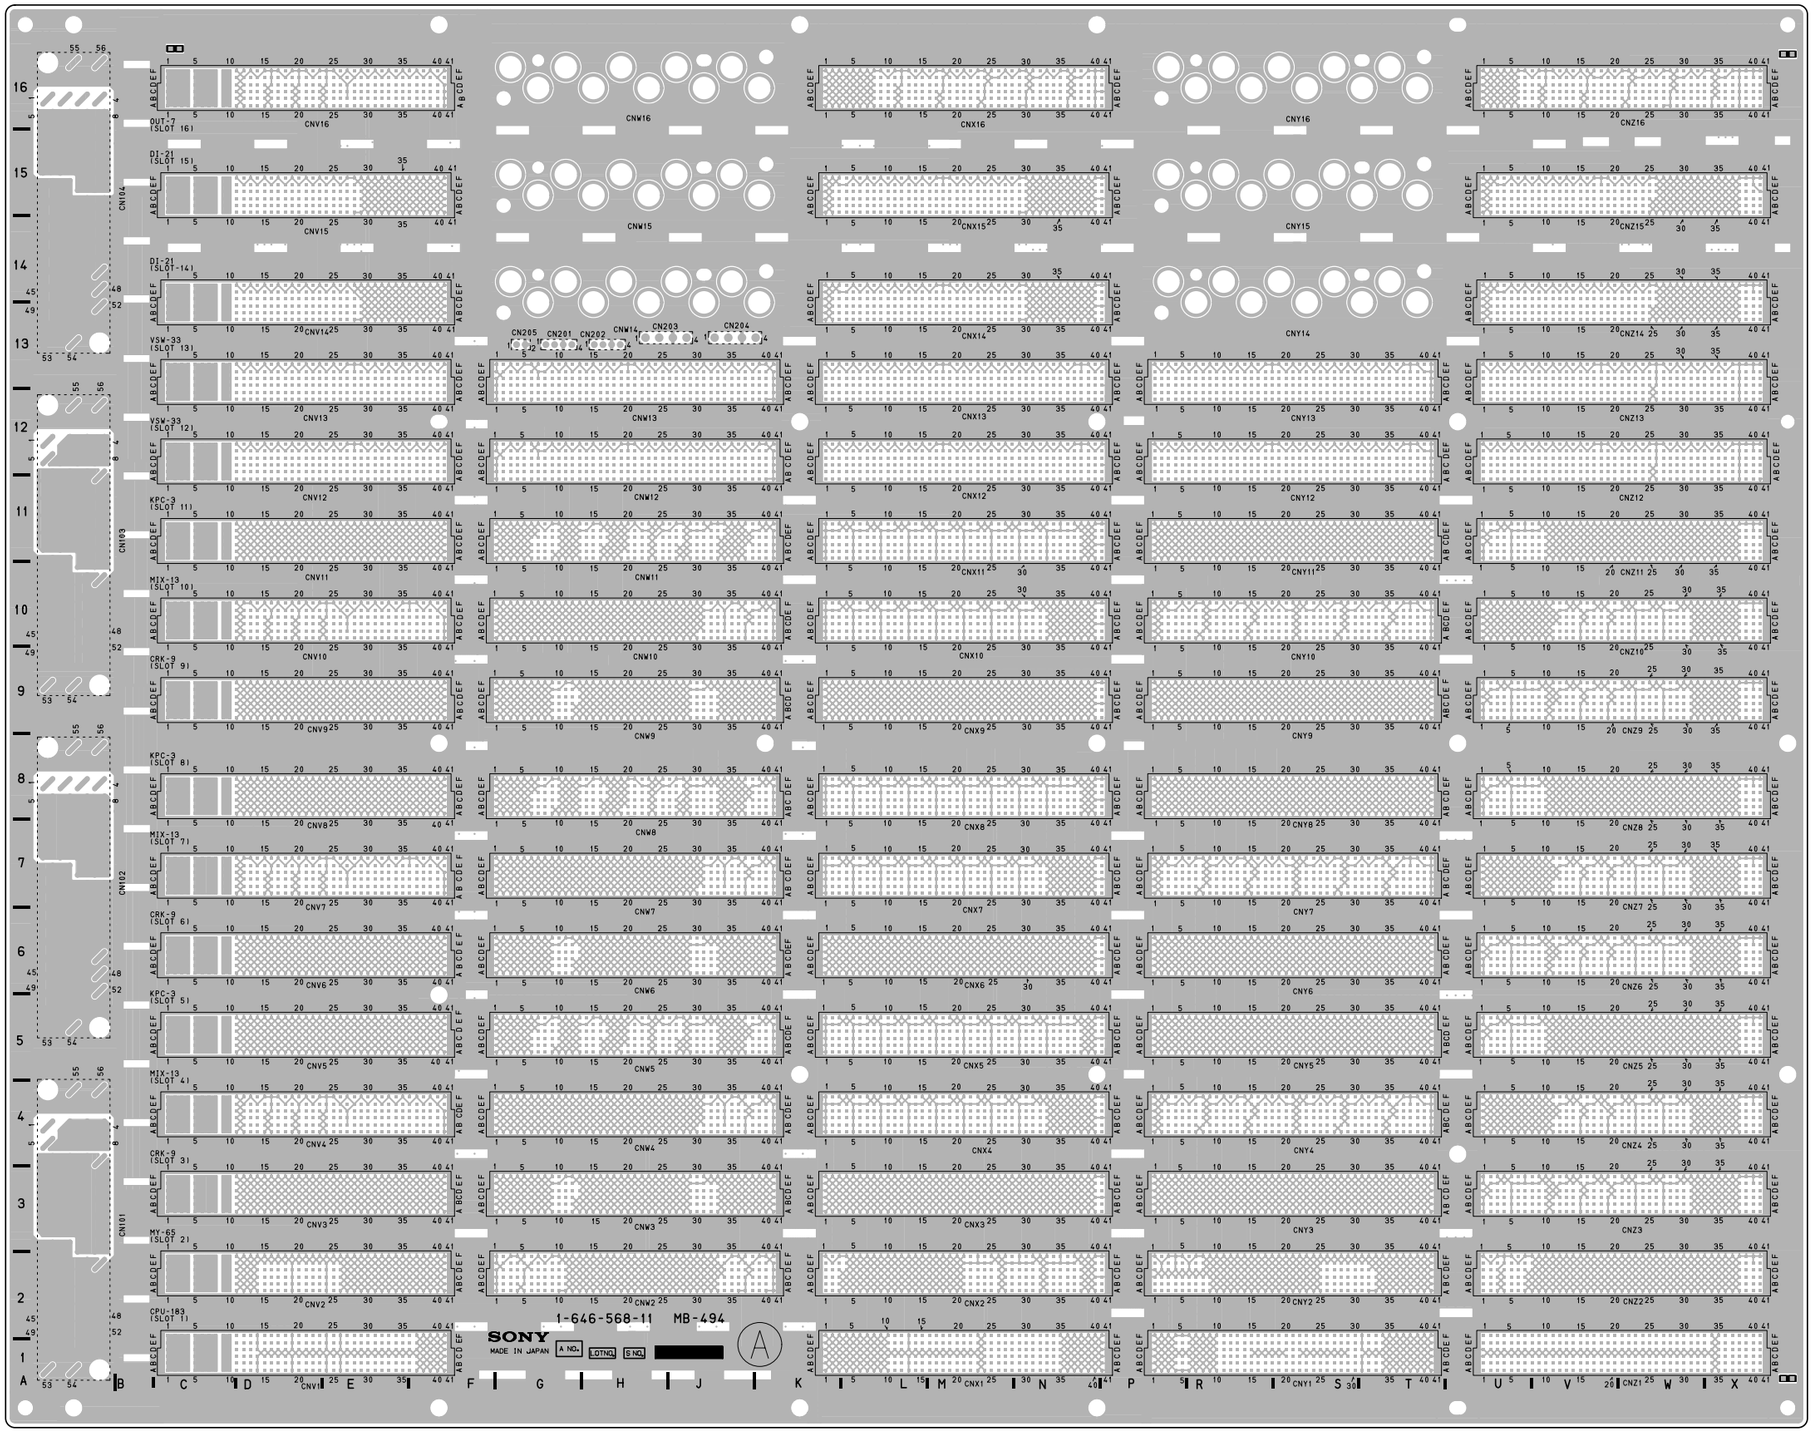


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

MB-494 (1-646-568-11)

CN101	*A3
CN102	*A7
CN103	*A11
CN104	*A15
CN201	*G13
CN202	*H13
CN203	*H13
CN204	*J13
CN205	*G13
CNV1	D1
CNV2	D2
CNV3	D3
CNV4	D4
CNV5	D5
CNV6	D6
CNV7	D7
CNV8	D8
CNV9	D9
CNV10	D10
CNV11	D11
CNV12	D12
CNV13	D13
CNV14	D13
CNV15	D15
CNV16	D16
CNW2	H2
CNW3	H3
CNW4	H4
CNW5	H5
CNW6	H6
CNW7	H7
CNW8	H8
CNW9	H9
CNW10	H10
CNW11	H11
CNW12	H12
CNW13	H13
CNX1	M1
CNX2	M2
CNX3	M3
CNX4	M4
CNX5	M5
CNX6	M6
CNX7	M7
CNX8	M8
CNX9	M9
CNX10	M10
CNX11	M11
CNX12	M12
CNX13	M13
CNX14	M13
CNX15	M15
CNX16	M16
CNY1	S1
CNY2	S2
CNY3	S3
CNY4	S4
CNY5	S5
CNY6	S6
CNY7	S7
CNY8	S8
CNY9	S9
CNY10	S10
CNY11	S11
CNY12	S12
CNY13	S13
CNZ1	W1
CNZ2	W2
CNZ3	W3
CNZ4	W4
CNZ5	W5
CNZ6	W6
CNZ7	W7
CNZ8	W8
CNZ9	W9
CNZ10	W10
CNZ11	W11
CNZ12	W12
CNZ13	W13
CNZ14	W13
CNZ15	W15
CNZ16	W16

*:B SIDE

MB-494 -A SIDE-
SUFFIX: -11

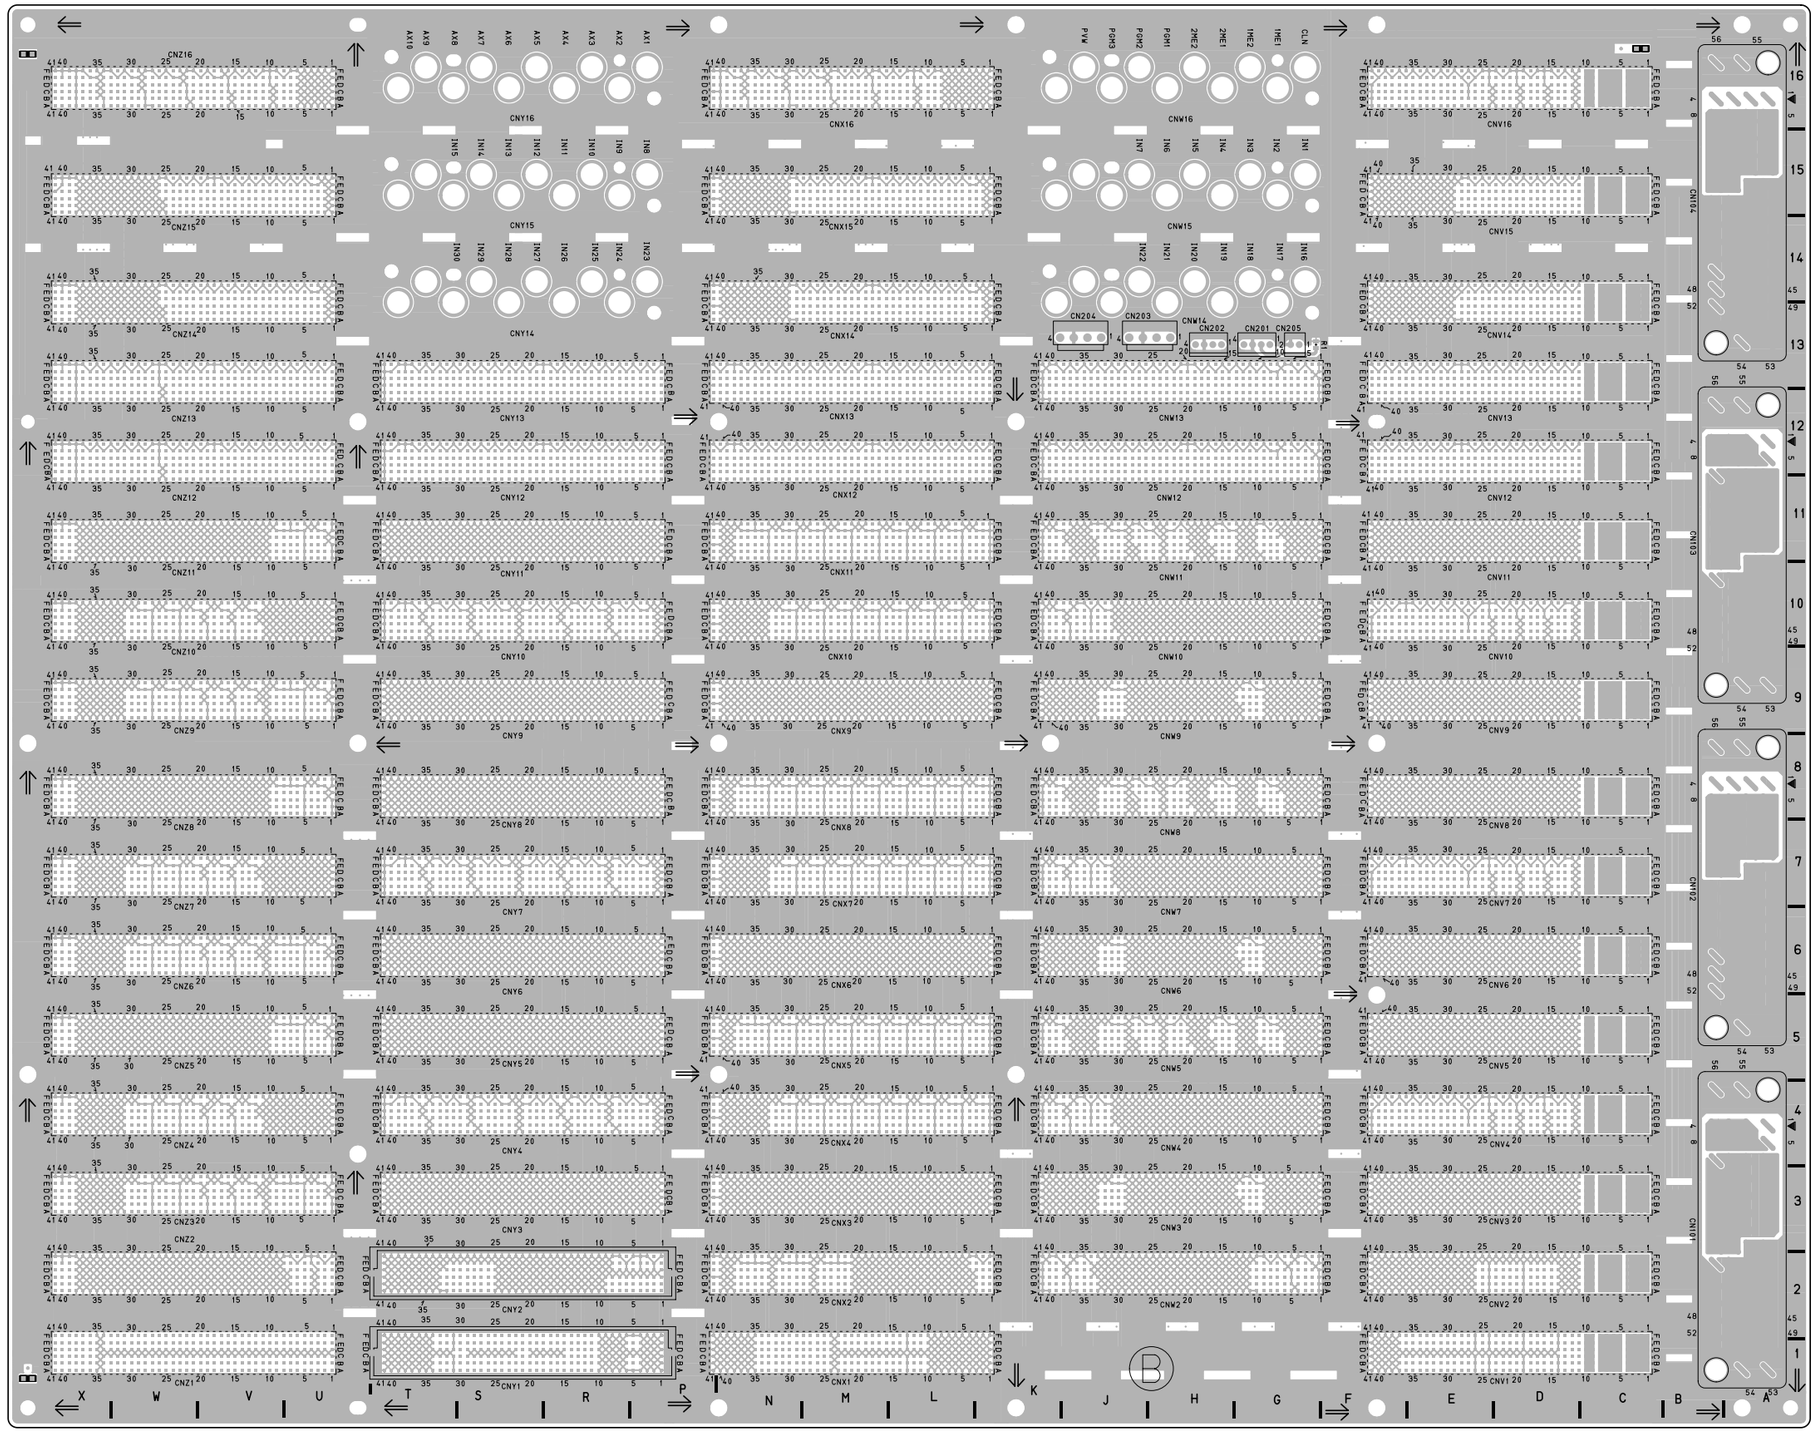


MB-494 -B SIDE-
SUFFIX: -11

MEM-87 (1-668-558-11)


CN1	*A1
CN2	*A1
IC1	A1
IC2	A1
IC3	A1
IC4	A1
IC5	*A1
IC6	*A1
IC7	*A1
IC8	*A1

*:B SIDE

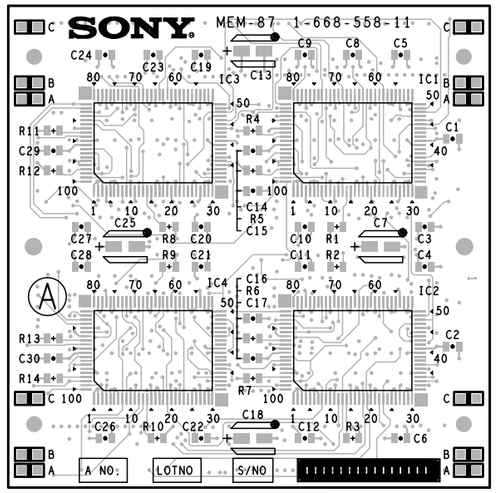

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

MEM-87 -A SIDE-
SUFFIX: -11

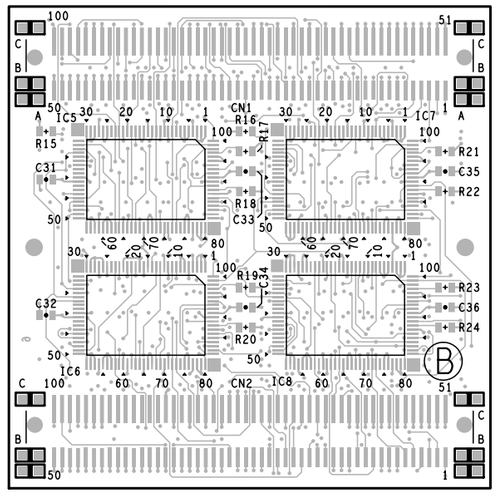


MEM-87 -B SIDE-
SUFFIX: -11

MEM-92 (1-668-559-11)


CN1	*A2
CN2	*C2
D1	A2
D2	C2
E1	B3
IC1	B2
IC2	B2
IC3	*B1
IC4	*B2
IC5	*B2
IC6	*B3
IC7	*B1
IC8	*B2
IC9	*B2
IC10	*B3
SC1	A1
SC2	A2
SC3	C1
SC4	C2
TP1	A1
TP2	B3
TP3	B3
TP4	C1

*:B SIDE

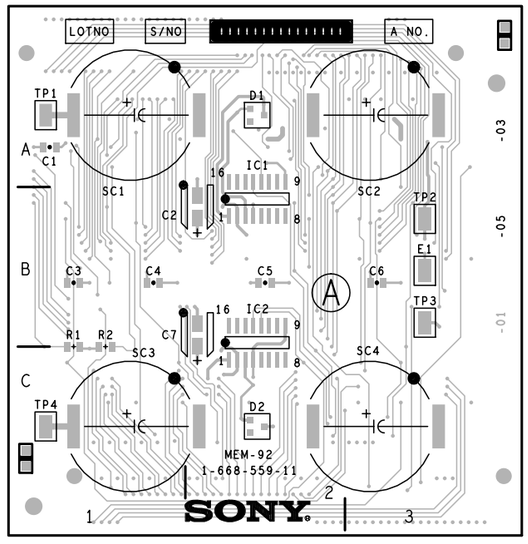


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

MEM-92 -A SIDE-
SUFFIX: -11

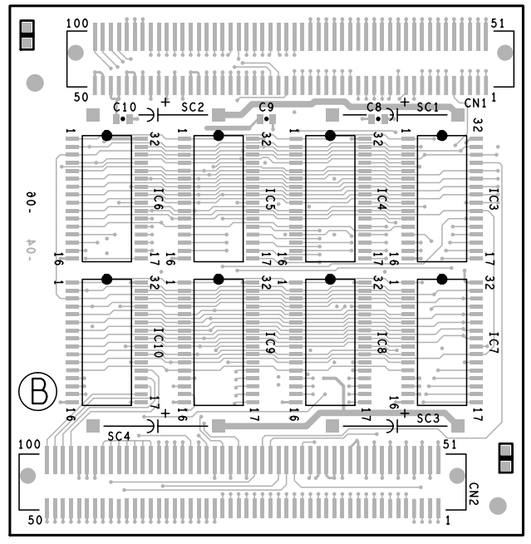

MEM-92 -B SIDE-
SUFFIX: -11

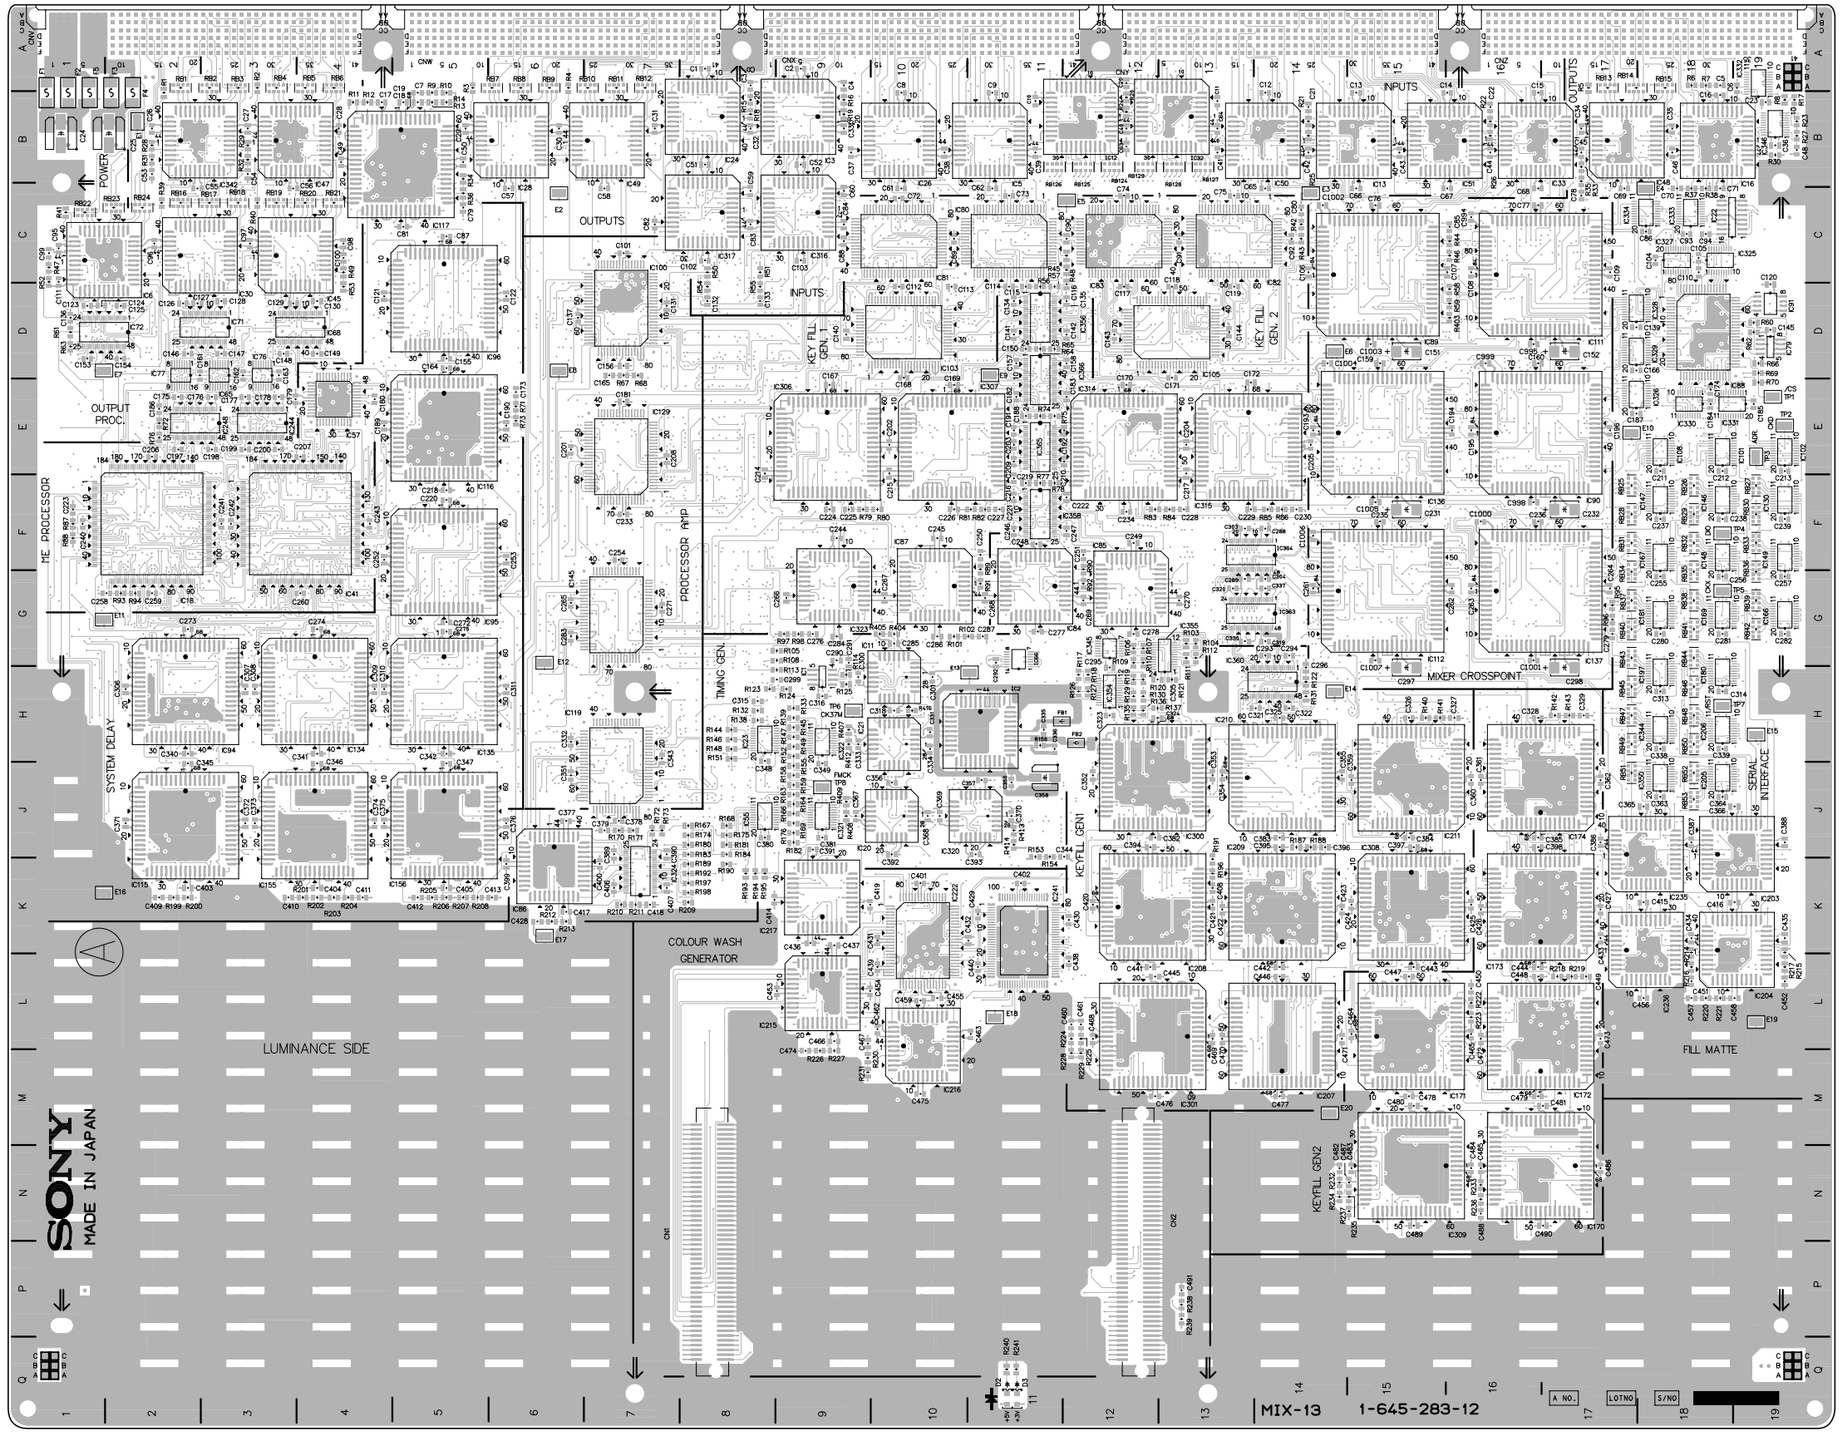


HDS-7000 (UCJ) : S/N 11016 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

MIX-13 -A SIDE-
SUFFIX: -12


MIX-13 (1-645-283-12)

CN1	P8	IC40	*F4	IC143	*G8
CN2	P12	IC41	F4	IC144	*G7
		IC42	*B9	IC145	G7
D2	R11	IC43	*B10	IC146	F18
D3	R11	IC44	*C1	IC147	F18
		IC45	C3	IC148	F18
E1	B2	IC47	B3	IC149	F19
E2	C6	IC48	B17	IC150	*F18
E3	C14	IC49	B7	IC151	*F18
E4	C18	IC50	B14	IC152	*J4
E5	C12	IC51	B15	IC153	*E5
E6	D14	IC52	*B14	IC154	*B5
E7	D1	IC53	*B15	IC155	J4
E8	D6	IC54	*B18	IC156	J5
E9	D11	IC55	J8	IC159	*F10
E10	E17	IC57	E4	IC160	*F13
E11	G1	IC65	D3	IC161	*E15
E12	G6	IC66	G11	IC162	*C16
E13	H11	IC67	*D4	IC163	*C15
E14	H14	IC68	D4	IC164	*F18
E15	H19	IC69	*D3	IC165	*F18
E16	K1	IC70	*D1	IC166	G19
E17	K6	IC71	D3	IC167	F18
E18	L11	IC72	D1	IC168	*G19
E19	L19	IC73	*D3	IC169	G18
E20	M14	IC74	*D3	IC170	N16
E21	*B2	IC75	*D2	IC171	L15
E22	*C6	IC76	D3	IC172	L16
E23	*C14	IC77	D2	IC173	K16
E24	*C18	IC78	*D2	IC174	J16
E25	*C12	IC79	D19	IC175	*D11
E26	*D14	IC80	C11	IC176	*D14
E27	*D1	IC81	C10	IC177	*E10
E28	*D6	IC82	C13	IC178	*E13
E29	*E17	IC83	C12	IC179	*D18
E30	*E11	IC84	G11	IC180	H18
E31	*G1	IC85	G12	IC181	G18
E32	*G6	IC86	K6	IC182	*G16
E33	*G10	IC87	G10	IC183	*G15
E34	*H14	IC88	D18	IC184	*E16
E35	*H19	IC89	C15	IC185	*H18
E36	*K1	IC90	E16	IC186	*G18
E37	*K6	IC91	D19	IC189	*N16
E38	*L11	IC92	*H2	IC190	*L15
E39	*L19	IC93	*H5	IC191	*L16
E40	*M14	IC94	H2	IC192	*K16
		IC95	F5	IC193	*J16
F1	B1	IC96	D5	IC196	*H18
F2	B1	IC97	*F8	IC197	H18
F3	B2	IC98	*E8	IC199	*L11
F4	B2	IC99	*E7	IC200	*K10
F5	B1	IC100	D7	IC201	*L10
		IC101	E18	IC202	*K9
FB1	H11	IC102	E19	IC203	J19
FB2	H12	IC103	D10	IC204	K19
		IC105	D13	IC205	J18
IC1	H9	IC107	*E19	IC206	H18
IC2	H11	IC108	E18	IC207	L14
IC3	B9	IC109	*J8	IC208	K12
IC4	*B8	IC110	*H8	IC209	K14
IC5	B11	IC111	C16	IC210	J14
IC6	C1	IC112	G15	IC211	J15
IC7	*B6	IC113	*J2	IC213	*J18
IC9	*C2	IC114	*J5	IC214	*H18
IC10	*B17	IC115	J2	IC215	L9
IC11	H10	IC116	E5	IC216	L10
IC12	B12	IC117	B5	IC217	K9
IC13	B15	IC118	*J7	IC218	*J19
IC14	*B12	IC119	J7	IC219	*K19
IC15	*B15	IC120	*C11	IC222	K10
IC16	B18	IC121	*C10	IC224	*L14
IC17	*F2	IC122	*C13	IC225	*K12
IC18	F2	IC123	*C12	IC226	*K14
IC19	*H9	IC124	*E18	IC227	*J14
IC20	J10	IC125	*E18	IC228	*J15
IC21	H10	IC126	*D8	IC233	*J18
IC22	C18	IC127	*D8	IC234	*K18
IC23	H8	IC128	*D7	IC235	J18
IC24	B8	IC129	E7	IC236	K18
IC25	*B11	IC130	F19	IC241	K11
IC26	B10	IC131	*H4	IC243	*E2
IC27	*C3	IC132	*F5	IC244	E3
IC28	B6	IC133	*D5	IC246	*E3
IC29	*B3	IC134	H4	IC248	E2
IC30	C2	IC135	H5	IC249	*E6
IC32	B13	IC136	E15	IC250	*F8
IC33	B16	IC137	G16	IC251	*E8
IC34	*B13	IC138	*D10	IC253	*H6
IC35	*B16	IC139	*D12	IC254	*J8
IC37	*J10	IC140	*E9	IC255	*H8
IC38	*J11	IC141	*E12	IC257	*D8
IC39	*J9	IC142	*G8	IC258	*D8

IC259	*D6	RB19	C3	TP1	E19
IC261	*G6	RB20	C4	TP2	E19
IC262	*G8	RB21	C4	TP3	E19
IC263	*G8	RB22	C1	TP4	F18
IC300	J12	RB23	C2	TP5	G18
IC301	L12	RB24	C2	TP6	H9
IC302	*J12	RB25	F17	TP7	H18
IC303	*L12	RB26	F18	TP8	J9
IC304	*G9	RB27	F19		
IC305	*G10	RB28	F17	*:B SIDE	
IC306	E9	RB29	F18		
IC307	E10	RB30	F19		
IC308	K15	RB31	F17		
IC309	N15	RB32	F18		
IC310	*K15	RB33	F19		
IC311	*N15	RB34	G17		
IC312	*G12	RB35	G18		
IC313	*G13	RB36	G19		
IC314	E12	RB37	G17		
IC315	E13	RB38	G18		
IC316	C9	RB39	G19		
IC317	C8	RB40	G17		
IC318	*C9	RB41	G18		
IC319	*C8	RB42	G19		
IC320	J11	RB43	G17		
IC321	J9	RB44	G18		
IC322	H9	RB45	H17		
IC323	G9	RB46	H18		
IC324	K7	RB47	H17		
IC325	C18	RB48	H18		
IC326	E17	RB49	H17		
IC327	C18	RB50	H18		
IC328	D17	RB51	J17		
IC329	D17	RB52	J18		
IC330	E18	RB53	J18		
IC331	E18	RB54	*A2		
IC332	A19	RB55	*A3		
IC333	C18	RB56	*A3		
IC334	C18	RB57	*A3		
IC335	*E17	RB58	*A4		
IC336	*E18	RB59	*A4		
IC337	*E18	RB60	*A6		
IC338	*D17	RB61	*A6		
IC339	*D17	RB62	*A6		
IC340	*C18	RB63	*A17		
IC341	*C18	RB64	*A17		
IC342	B2	RB65	*A18		
IC343	*B2	RB66	*C2		
IC344	H18	RB67	*C3		
IC345	G12	RB68	*C3		
IC346	B19	RB69	*C3		
IC347	*F19	RB70	*C4		
IC348	*G18	RB71	*C4		
IC349	*H18	RB72	*C1		
IC350	J18	RB73	*C2		
IC351	*H9	RB74	*C2		
IC352	*H10	RB75	*F17		
IC353	*H10	RB76	*F18		
IC354	H12	RB77	*F17		
IC355	H13	RB78	*F18		
IC356	D11	RB79	*F17		
IC357	*D11	RB80	*F18		
IC358	F11	RB81	*G17		
IC359	*F11	RB82	*G18		
IC360	H14	RB83	*G19		
IC361	*H14	RB84	*G17		
IC362	*J11	RB85	*G19		
IC363	G13	RB86	*G17		
IC364	F13	RB87	*G18		
IC365	E11	RB88	*G19		
IC366	E11	RB89	*G18		
IC367	*E11	RB90	*H17		
IC368	*F19	RB91	*H18		
		RB92	*H17		
RB1	A2	RB93	*H18		
RB2	A3	RB94	*H17		
RB3	A3	RB95	*H18		
RB4	A3	RB96	*J18		
RB5	A4	RB97	*J18		
RB6	A4	RB124	B12		
RB7	A6	RB125	B12		
RB8	A6	RB126	B11		
RB9	A6	RB127	B13		
RB10	A7	RB128	B13		
RB11	A7	RB129	B12		
RB12	A7	RB145	*B11		
RB13	A17	RB146	*B12		
RB14	A17	RB147	*B12		
RB15	A18	RB148	*B12		
RB16	C2	RB149	*B13		
RB17	C3	RB150	*B13		
RB18	C3				

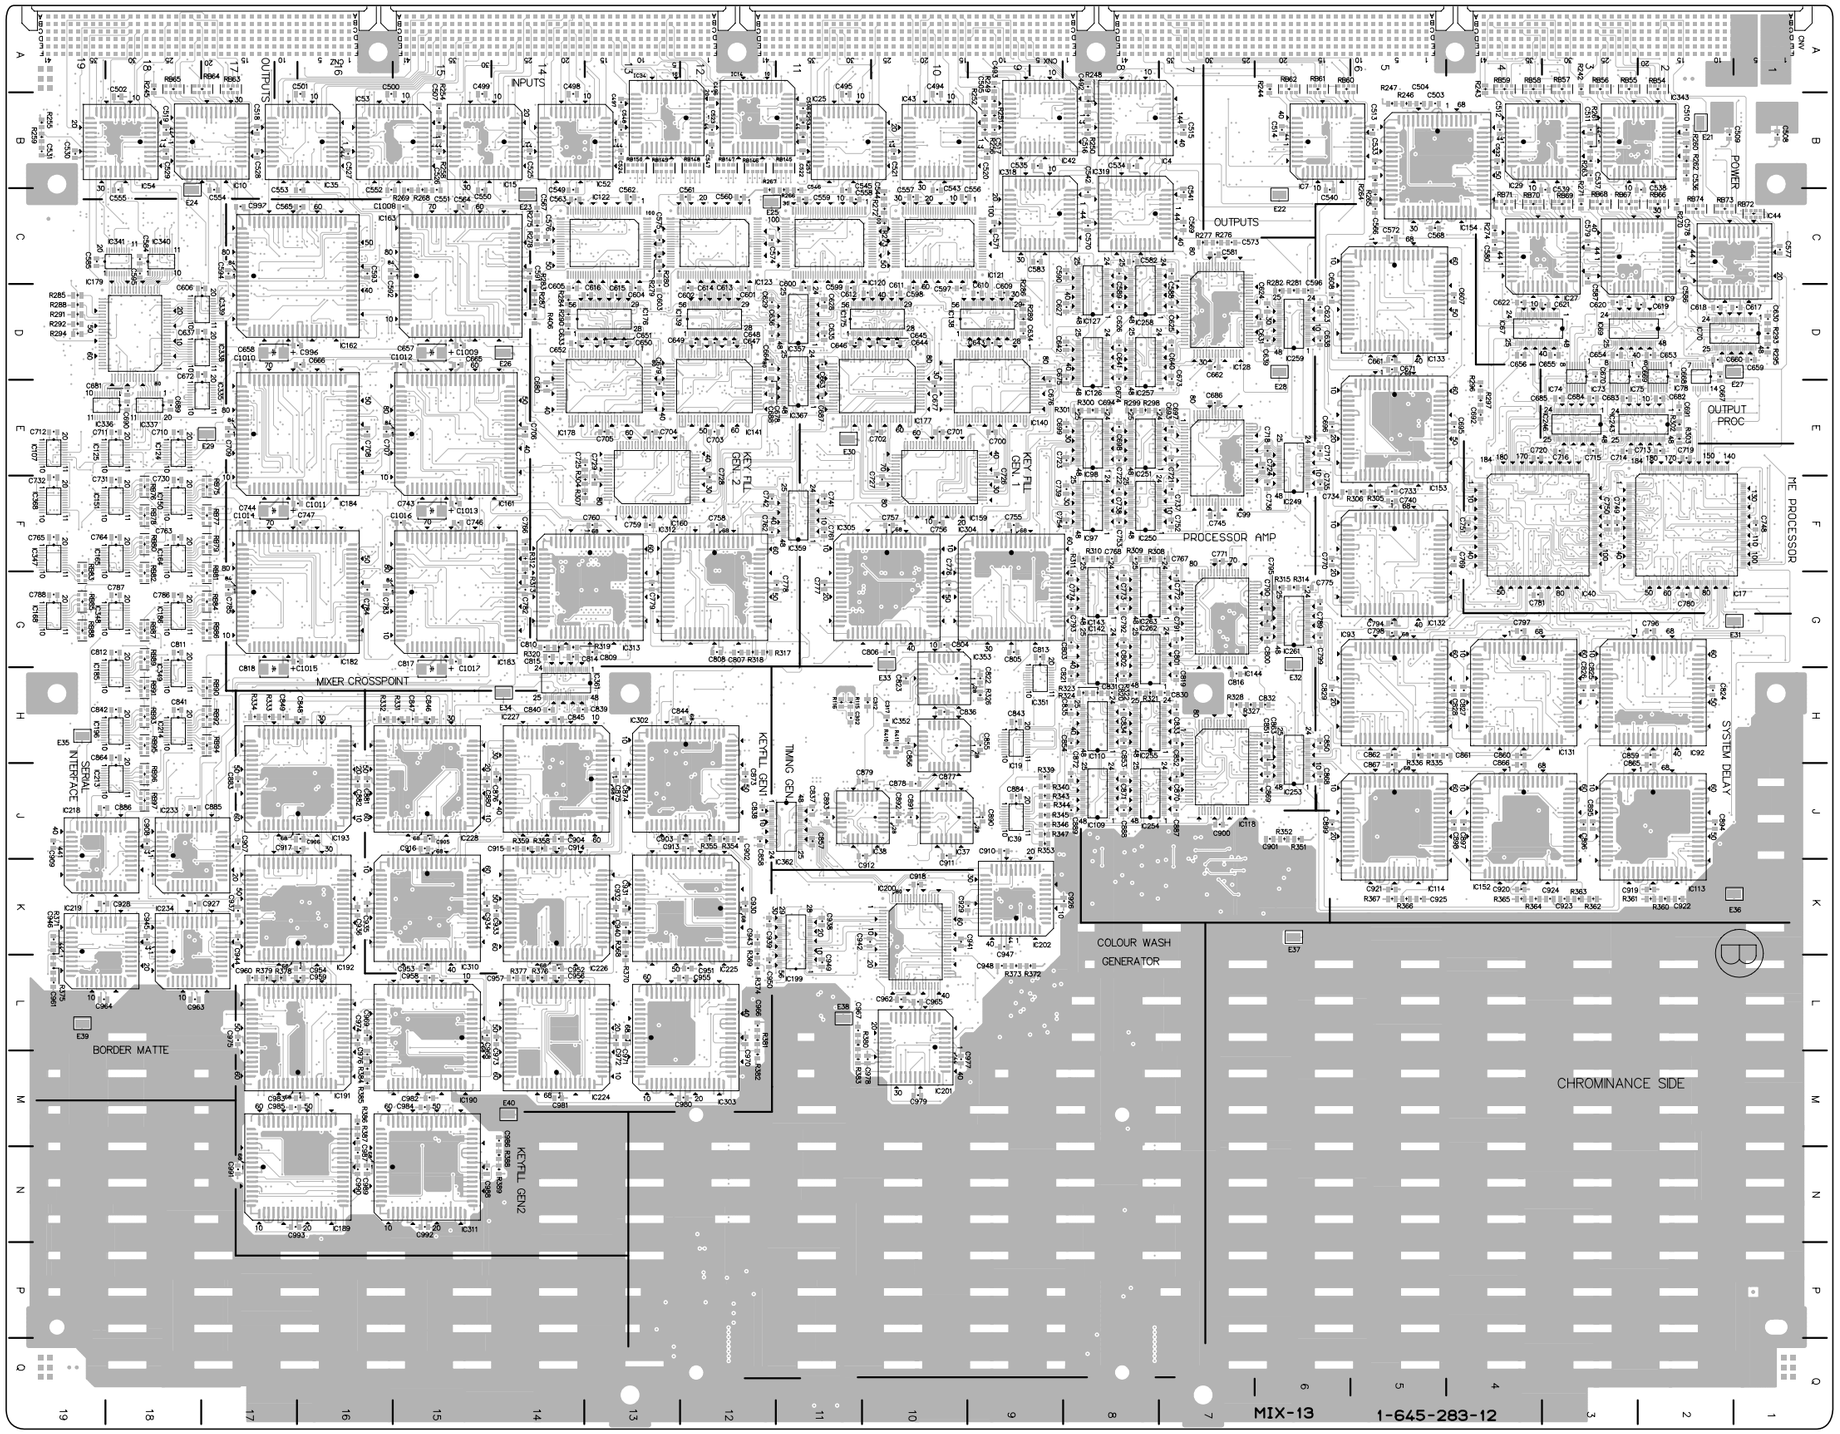

MIX-13 -B SIDE-
SUFFIX: -12

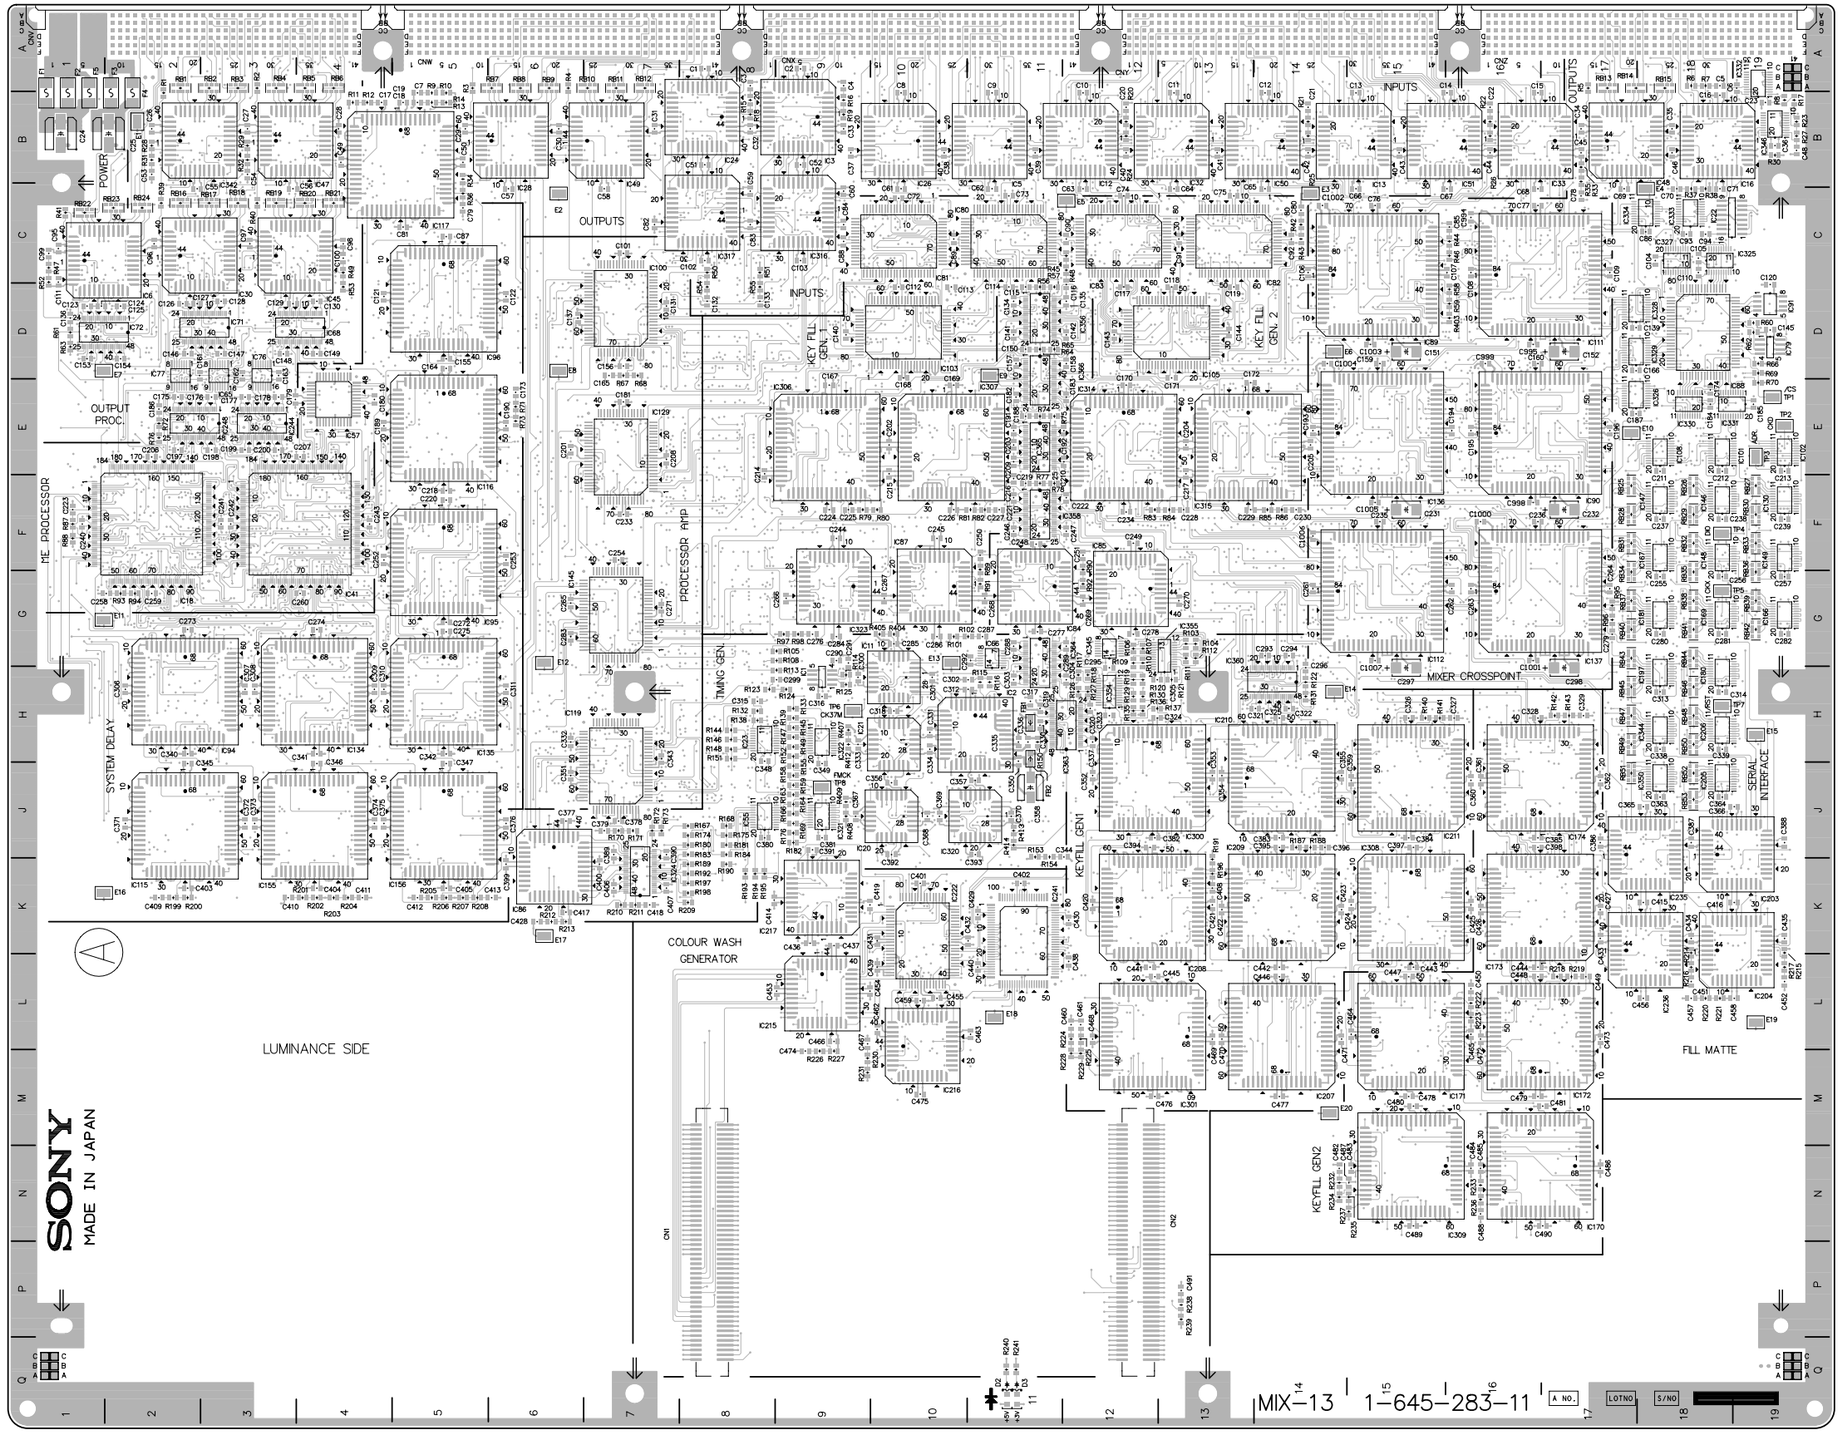


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 through 11015

MIX-13 -A SIDE-
SUFFIX: -11


MIX-13 (1-645-283-11)

CN1	P8	IC40	*F4	IC143	*G8
CN2	P12	IC41	F4	IC144	*G7
		IC42	*B9	IC145	G7
D2	R11	IC43	*B10	IC146	F18
D3	R11	IC44	*C1	IC147	F18
		IC45	C3	IC148	F18
E1	B2	IC47	B3	IC149	F19
E2	C6	IC48	B17	IC150	*F18
E3	C14	IC49	B7	IC151	*F18
E4	C18	IC50	B14	IC152	*J4
E5	C12	IC51	B15	IC153	*E5
E6	D14	IC52	*B14	IC154	*B5
E7	D1	IC53	*B15	IC155	J4
E8	D6	IC54	*B18	IC156	J5
E9	D11	IC55	J8	IC159	*F10
E10	E17	IC57	E4	IC160	*F13
E11	G1	IC65	D3	IC161	*E15
E12	G6	IC66	G11	IC162	*C16
E13	G10	IC67	*D4	IC163	*C15
E14	H14	IC68	D4	IC164	*F18
E15	H19	IC69	*D3	IC165	*F18
E16	K1	IC70	*D1	IC166	G19
E17	K6	IC71	D3	IC167	F18
E18	L11	IC72	D1	IC168	*G19
E19	L19	IC73	*D3	IC169	G18
E20	M14	IC74	*D3	IC170	N16
E21	*B2	IC75	*D2	IC171	L15
E22	*C6	IC76	D3	IC172	L16
E23	*C14	IC77	D2	IC173	K16
E24	*C18	IC78	*D2	IC174	J16
E25	*C12	IC79	D19	IC175	*D11
E26	*D14	IC80	C11	IC176	*D14
E27	*D1	IC81	C10	IC177	*E10
E28	*D6	IC82	C13	IC178	*E13
E29	*E17	IC83	C12	IC179	*D18
E30	*E11	IC84	G11	IC180	H18
E31	*G1	IC85	G12	IC181	G18
E32	*G6	IC86	K6	IC182	*G16
E33	*G10	IC87	G10	IC183	*G15
E34	*H14	IC88	D18	IC184	*E16
E35	*H19	IC89	C15	IC185	*H18
E36	*K1	IC90	E16	IC186	*G18
E37	*K6	IC91	D19	IC189	*N16
E38	*L11	IC92	*H2	IC190	*L15
E39	*L19	IC93	*H5	IC191	*L16
E40	*M14	IC94	H2	IC192	*K16
		IC95	F5	IC193	*J16
F1	B1	IC96	D5	IC196	*H18
F2	B1	IC97	*F8	IC197	H18
F3	B2	IC98	*E8	IC199	*L11
F4	B2	IC99	*E7	IC200	*K10
F5	B1	IC100	D7	IC201	*L10
		IC101	E18	IC202	*K9
FB1	H11	IC102	E19	IC203	J19
FB2	H11	IC103	D10	IC204	K19
		IC105	D13	IC205	J18
IC1	H9	IC107	*E19	IC206	H18
IC2	H11	IC108	E18	IC207	L14
IC3	B9	IC109	*J8	IC208	K12
IC4	*B8	IC110	*H8	IC209	K14
IC5	B11	IC111	C16	IC210	J14
IC6	C1	IC112	G15	IC211	J15
IC7	*B6	IC113	*J2	IC213	*J18
IC9	*C2	IC114	*J5	IC214	*H18
IC10	*B17	IC115	J2	IC215	L9
IC11	H10	IC116	E5	IC216	L10
IC12	B12	IC117	B5	IC217	K9
IC13	B15	IC118	*J7	IC218	*J19
IC14	*B12	IC119	J7	IC219	*K19
IC15	*B15	IC120	*C11	IC222	K10
IC16	B18	IC121	*C10	IC224	*L14
IC17	*F2	IC122	*C13	IC225	*K12
IC18	F2	IC123	*C12	IC226	*K14
IC19	*H9	IC124	*E18	IC227	*J14
IC20	J10	IC125	*E18	IC228	*J15
IC21	H10	IC126	*D8	IC233	*J18
IC22	C18	IC127	*D8	IC234	*K18
IC23	H8	IC128	*D7	IC235	J18
IC24	B8	IC129	E7	IC236	K18
IC25	*B11	IC130	F19	IC241	K11
IC26	B10	IC131	*H4	IC243	*E2
IC27	*C3	IC132	*F5	IC244	E3
IC28	B6	IC133	*D5	IC246	*E3
IC29	*B3	IC134	H4	IC248	E2
IC30	C2	IC135	H5	IC249	*E6
IC32	B13	IC136	E15	IC250	*F8
IC33	B16	IC137	G16	IC251	*E8
IC34	*B13	IC138	*D10	IC253	*H6
IC35	*B16	IC139	*D12	IC254	*J8
IC37	*J10	IC140	*E9	IC255	*H8
IC38	*J11	IC141	*E12	IC257	*D8
IC39	*J9	IC142	*G8	IC258	*D8

IC259	*D6	RB19	C3
IC261	*G6	RB20	C4
IC262	*G8	RB21	C4
IC263	*G8	RB22	C1
IC300	J12	RB23	C2
IC301	L12	RB24	C2
IC302	*J12	RB25	F17
IC303	*L12	RB26	F18
IC304	*G9	RB27	F19
IC305	*G10	RB28	F17
IC306	E9	RB29	F18
IC307	E10	RB30	F19
IC308	K15	RB31	F17
IC309	N15	RB32	F18
IC310	*K15	RB33	F19
IC311	*N15	RB34	G17
IC312	*G12	RB35	G18
IC313	*G13	RB36	G19
IC314	E12	RB37	G17
IC315	E13	RB38	G18
IC316	C9	RB39	G19
IC317	C8	RB40	G17
IC318	*C9	RB41	G18
IC319	*C8	RB42	G19
IC320	J11	RB43	G17
IC321	J9	RB44	G18
IC322	H9	RB45	H17
IC323	G9	RB46	H18
IC324	K7	RB47	H17
IC325	C18	RB48	H18
IC326	E17	RB49	H17
IC327	C18	RB50	H18
IC328	D17	RB51	J17
IC329	D17	RB52	J18
IC330	E18	RB53	J18
IC331	E18	RB54	*A2
IC332	A19	RB55	*A3
IC333	C18	RB56	*A3
IC334	C18	RB57	*A3
IC335	*E17	RB58	*A4
IC336	*E18	RB59	*A4
IC337	*E18	RB60	*A6
IC338	*D17	RB61	*A6
IC339	*D17	RB62	*A6
IC340	*C18	RB63	*A17
IC341	*C18	RB64	*A17
IC342	B2	RB65	*A18
IC343	*B2	RB66	*C2
IC344	H18	RB67	*C3
IC345	G12	RB68	*C3
IC346	B19	RB69	*C3
IC347	*F19	RB70	*C4
IC348	*G18	RB71	*C4
IC349	*H18	RB72	*C1
IC350	J18	RB73	*C2
IC351	*H9	RB74	*C2
IC352	*H10	RB75	*F17
IC353	*H10	RB76	*F18
IC354	H12	RB77	*F17
IC355	H13	RB78	*F18
IC356	D11	RB79	*F17
IC357	*D11	RB80	*F18
IC358	F11	RB81	*G17
IC359	*F11	RB82	*G18
IC360	H14	RB83	*G19
IC361	*H14	RB84	*G17
IC362	*J11	RB85	*G19
IC363	H12	RB86	*G17
IC364	G11	RB87	*G18
IC365	E11	RB88	*G19
IC366	E11	RB89	*G18
IC367	*E11	RB90	*H17
IC368	*F19	RB91	*H18
		RB92	*H17
RB1	A2	RB93	*H18
RB2	A3	RB94	*H17
RB3	A3	RB95	*H18
RB4	A3	RB96	*J18
RB5	A4	RB97	*J18
RB6	A4		
RB7	A6	TP1	E19
RB8	A6	TP2	E19
RB9	A6	TP3	E19
RB10	A7	TP4	F18
RB11	A7	TP5	G18
RB12	A7	TP6	H9
RB13	A17	TP7	H18
RB14	A17	TP8	J9
RB15	A18		
RB16	C2	*:B SIDE	
RB17	C3		
RB18	C3		

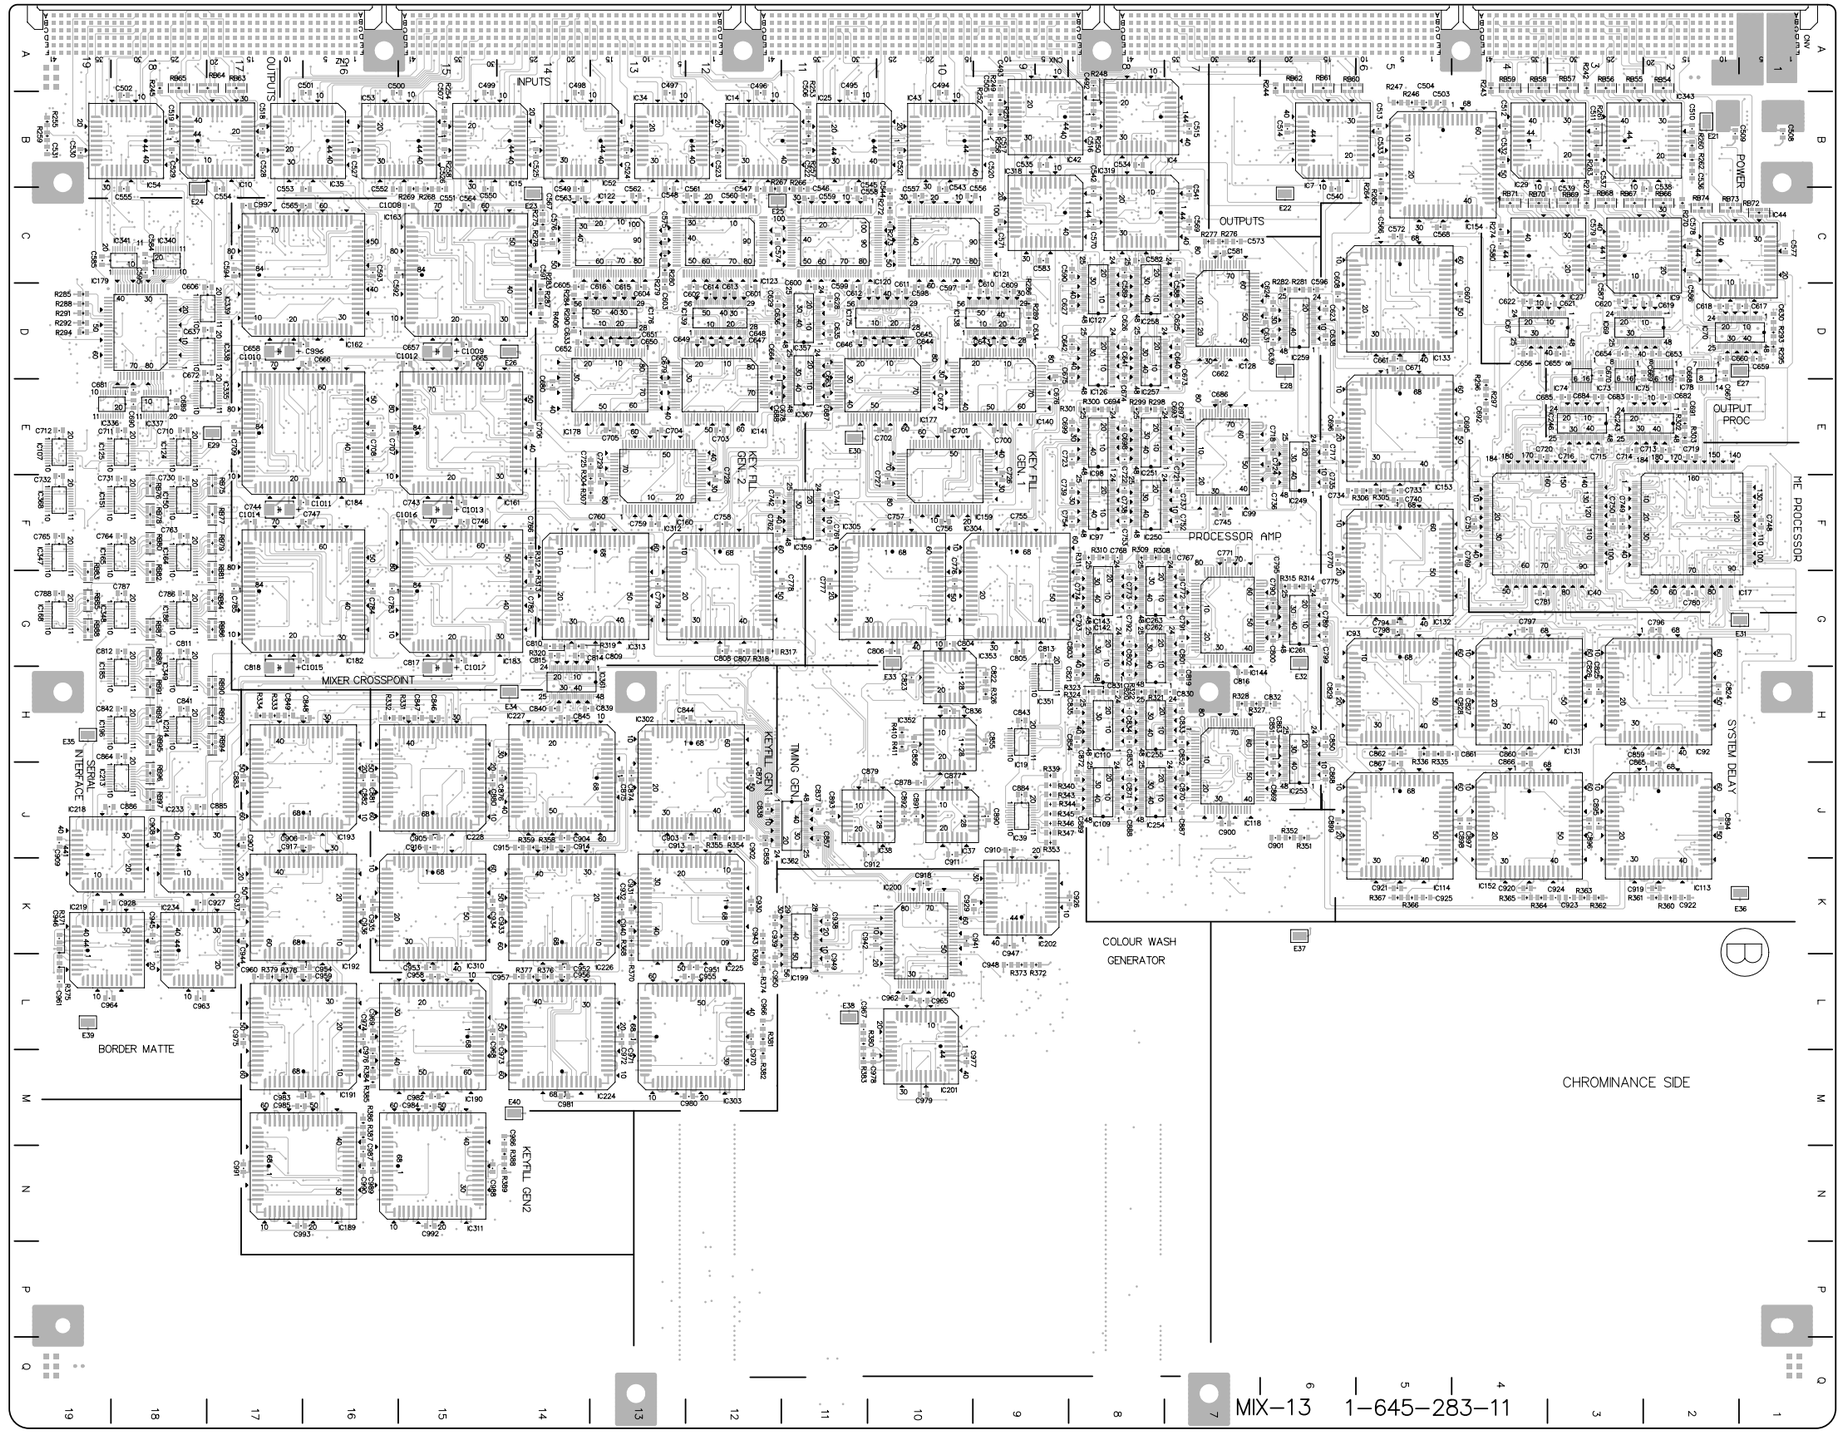

MIX-13 -B SIDE-
SUFFIX: -11

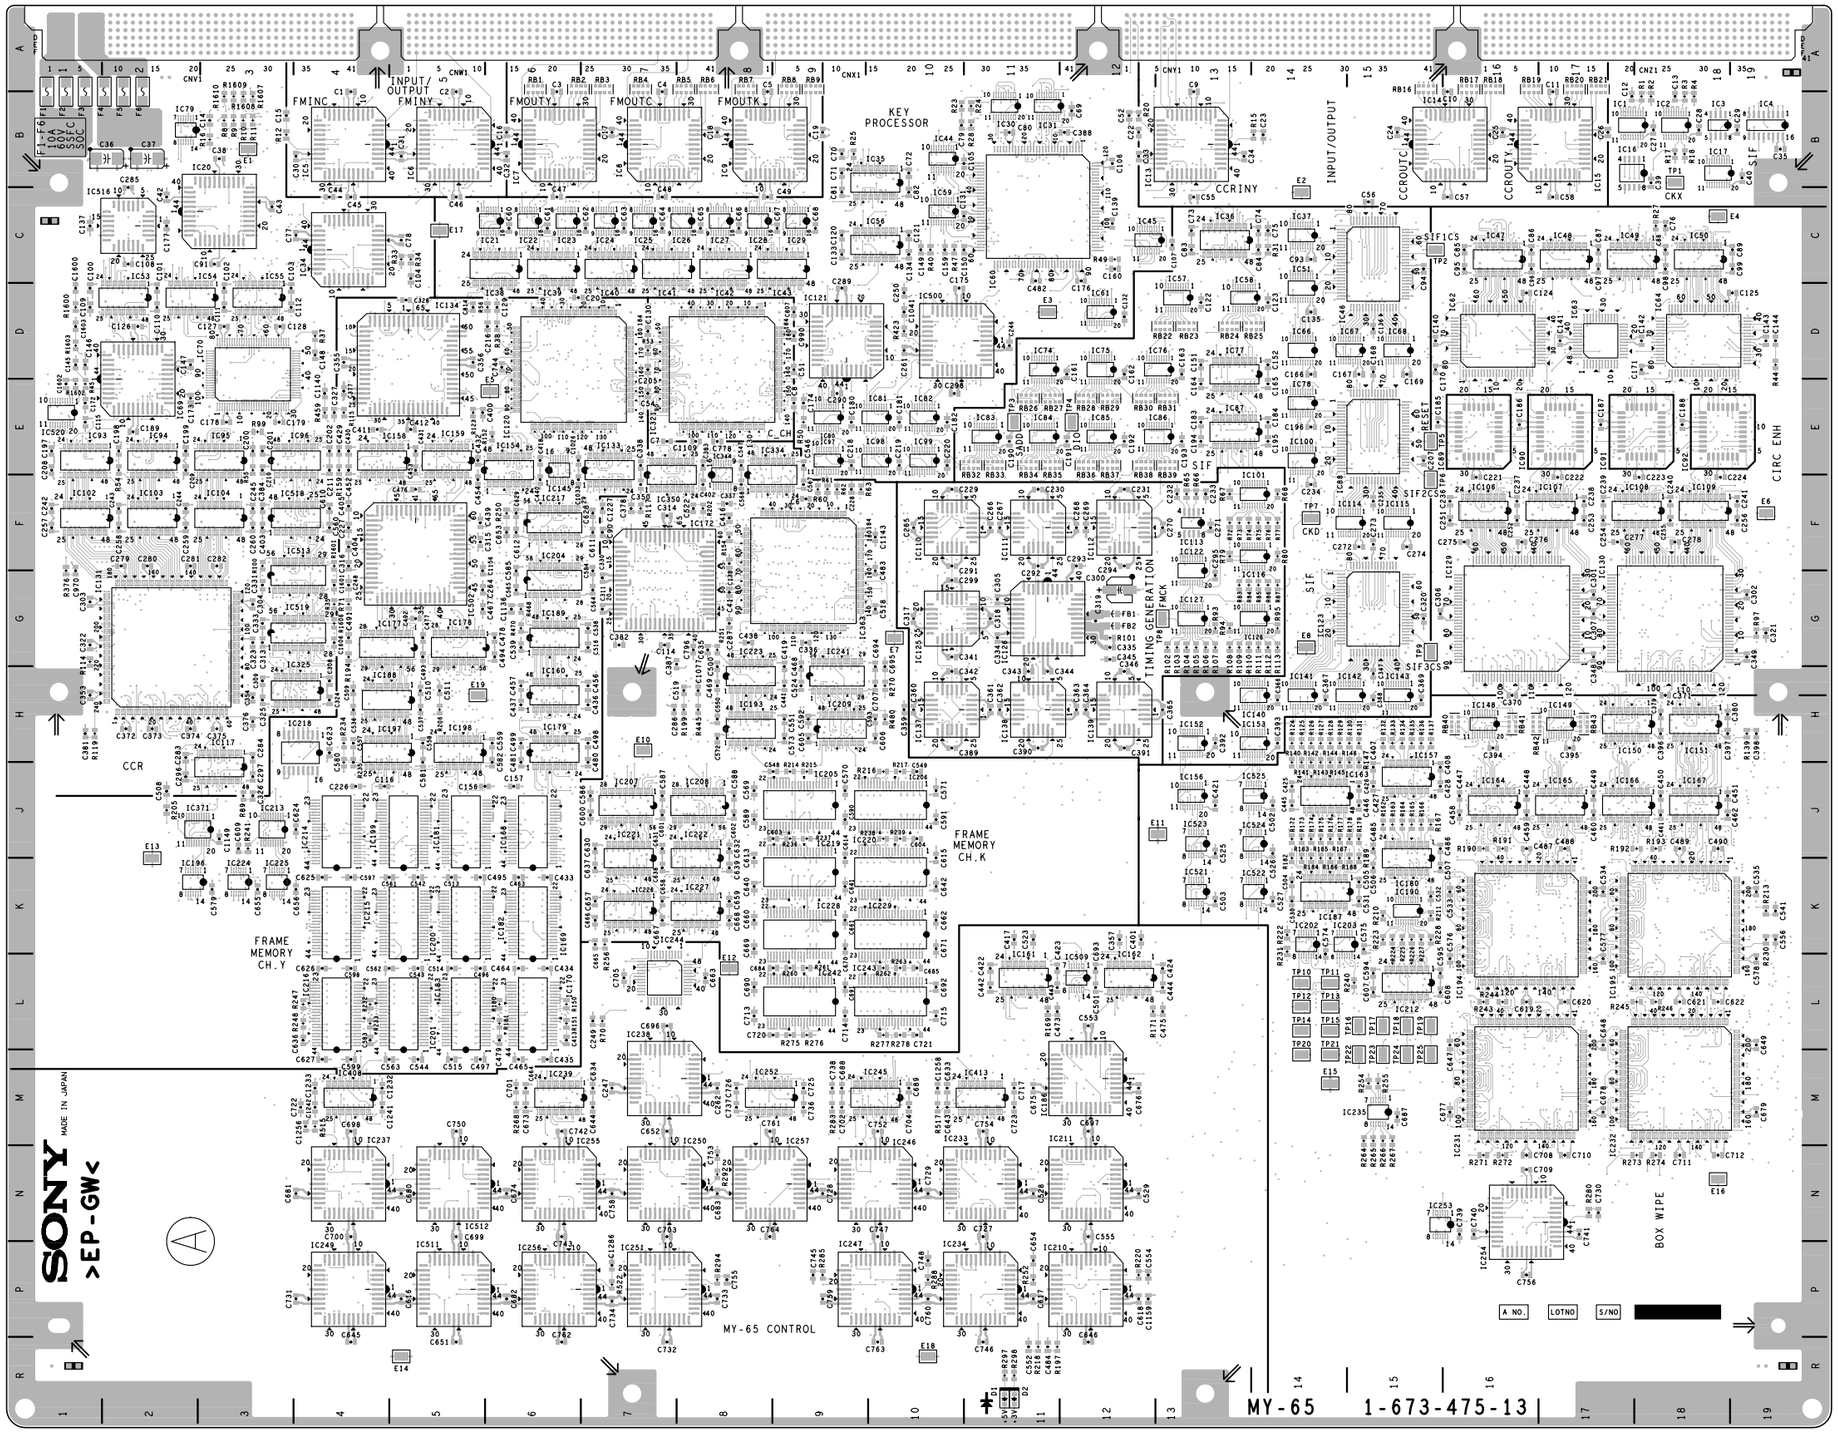


HKDS-7041 (UCJ) : S/N 10001 and Higher
HKDS-7041 (SY) : S/N 11001 and Higher

MY-65 -A SIDE-
SUFFIX: -11, 13


MY-65 (1-673-475-11, 13)

CNV1	A1	IC42	C8	IC148	H16
		IC43	C9	IC149	H17
CNW1	A5	IC44	B10	IC150	H17
		IC45	C12	IC151	H18
CNX1	A8	IC46	C15	IC152	H13
		IC47	C16	IC153	H14
CNY1	A12	IC48	C17	IC154	E6
		IC49	C17	IC155	*F9
CNZ1	A16	IC50	C18	IC156	J13
		IC51	D14	IC157	J15
D1	R11	IC53	D2	IC158	E4
D2	R11	IC54	D2	IC159	E5
		IC55	D3	IC160	H6
E1	B3	IC56	C10	IC161	L11
E2	C14	IC57	D13	IC162	L12
E3	D11	IC58	D13	IC163	J14
E4	C18	IC59	C10	IC164	J16
E5	E6	IC60	C11	IC165	J17
E6	F19	IC61	D12	IC166	J17
E7	G10	IC62	D16	IC167	J18
E8	G14	IC63	D17	IC168	J6
E9	*K7	IC64	D18	IC169	K6
E10	H7	IC66	D14	IC170	L6
E11	J13	IC67	D15	IC172	G7
E12	L8	IC68	D15	IC174	*G9
E13	K2	IC69	E2	IC175	*G9
E14	R5	IC70	D3	IC176	*G9
E15	M14	IC74	D11	IC177	G4
E16	N18	IC75	D12	IC178	G5
E17	C5	IC76	D13	IC179	H6
E18	R10	IC77	D13	IC180	K15
E19	H5	IC78	E14	IC181	J5
E20	*B8	IC79	B2	IC182	K5
E21	*B2	IC80	E9	IC183	L5
E22	*C17	IC81	E10	IC184	*F8
E23	*D12	IC82	E10	IC185	*G9
E24	*C5	IC83	E11	IC186	M12
E25	*D15	IC84	E11	IC187	K14
E26	*F19	IC85	E12	IC188	H4
E27	*F13	IC86	E13	IC189	G6
E28	*G9	IC87	E13	IC190	K15
E29	*J11	IC88	E15	IC191	*G8
E30	*J4	IC89	E16	IC192	*G7
E31	*H14	IC90	E17	IC193	H8
E32	*K15	IC91	E18	IC194	K16
E33	*L11	IC92	E18	IC195	K18
E34	*M3	IC93	E1	IC196	K2
E35	*N8	IC94	E2	IC197	H4
E36	*N18	IC95	E3	IC198	H5
E37	*N13	IC96	E4	IC199	J5
		IC97	E9	IC200	K5
F1	B1	IC98	E10	IC201	L5
F2	B1	IC99	E10	IC202	K14
F3	B1	IC100	E14	IC203	K14
F4	B2	IC101	F14	IC204	G6
F5	B2	IC102	F1	IC205	J9
F6	B2	IC103	F2	IC206	J10
		IC104	F3	IC207	J7
FB1	G12	IC106	F16	IC208	J8
FB2	G12	IC107	F17	IC209	H9
		IC108	F18	IC210	P12
IC1	B17	IC109	F18	IC211	N12
IC2	B18	IC110	F10	IC212	L15
IC3	B18	IC111	F11	IC213	J3
IC4	B19	IC112	F12	IC214	J4
IC5	B4	IC113	F13	IC215	K4
IC6	B5	IC114	F15	IC216	L4
IC7	B6	IC115	F15	IC217	F6
IC8	B7	IC116	F14	IC218	H4
IC9	B8	IC117	J3	IC219	K9
IC13	B13	IC120	D6	IC220	K10
IC14	B16	IC121	D9	IC221	K7
IC15	B17	IC122	G13	IC222	K8
IC16	B17	IC123	G15	IC223	H8
IC17	B18	IC124	*J3	IC224	K3
IC20	C3	IC125	G10	IC225	K3
IC21	C6	IC126	G11	IC226	K7
IC22	C6	IC127	G13	IC227	K8
IC23	C6	IC128	G14	IC228	K9
IC24	C7	IC129	G16	IC229	K10
IC25	C7	IC130	G18	IC230	*H9
IC26	C8	IC131	G2	IC231	M16
IC27	C8	IC132	*E6	IC232	M18
IC28	C8	IC133	E7	IC233	N11
IC29	C9	IC134	D5	IC234	P11
IC30	B11	IC137	H10	IC235	M15
IC31	B11	IC138	H11	IC236	*N4
IC34	C4	IC139	H12	IC237	N4
IC35	B10	IC140	H14	IC238	M7
IC36	C13	IC141	H14	IC239	M6
IC37	C14	IC142	H15	IC240	*M7
IC38	C6	IC143	H15	IC241	H9
IC39	C6	IC145	E6	IC242	L9
IC40	C7	IC146	*E6	IC243	L10
IC41	C7	IC147	*E7	IC244	L7

IC245	M10	IC352	*E5	IC524	J14
IC246	N10	IC353	*H6	IC525	J14
IC247	P10	IC355	*J16	IC526	*E8
IC248	*P4	IC356	*J17	IC527	*E8
IC249	P4	IC357	*J17		
IC250	N7	IC358	*J18	RB1	A6
IC251	P7	IC359	*K6	RB2	A6
IC252	M8	IC360	*L6	RB3	A7
IC253	N15	IC363	G9	RB4	A7
IC254	N16	IC364	*J2	RB5	A8
IC255	N6	IC365	*G4	RB6	A8
IC256	P6	IC366	*G5	RB7	A8
IC257	N8	IC367	*H6	RB8	A9
IC258	*B3	IC368	*K5	RB9	A9
IC259	*B5	IC369	*L5	RB16	A15
IC263	*B13	IC370	*M12	RB17	A16
IC264	*C6	IC371	J2	RB18	A16
IC265	*C7	IC372	*H5	RB19	A16
IC266	*C8	IC373	*J5	RB20	A17
IC267	*C3	IC374	*G6	RB21	A17
IC268	*C4	IC375	*G6	RB22	D13
IC269	*B11	IC376	*J7	RB23	D13
IC270	*B11	IC377	*J8	RB24	D13
IC271	*C15	IC378	*K16	RB25	D14
IC272	*C4	IC379	*K18	RB26	E11
IC273	*C16	IC380	*K2	RB27	E11
IC274	*C18	IC381	*H4	RB28	E12
IC276	*D3	IC382	*H5	RB29	E12
IC277	*D13	IC383	*K5	RB30	E12
IC278	*D13	IC384	*L5	RB31	E13
IC279	*D15	IC385	*J9	RB32	E11
IC280	*C11	IC386	*K14	RB33	E11
IC281	*D6	IC387	*K15	RB34	E11
IC282	*D7	IC388	*G6	RB35	E11
IC283	*D9	IC389	*J10	RB36	E12
IC284	*D16	IC390	*P12	RB37	E12
IC285	*D18	IC391	*N12	RB38	E12
IC286	*E1	IC392	*J3	RB39	E13
IC287	*E2	IC393	*J6	RB40	H16
IC288	*D3	IC394	*K4	RB41	H16
IC289	*D11	IC395	*L4	RB42	H16
IC290	*D12	IC396	*F6	RB43	H17
IC291	*D12	IC397	*J7	RB50	*D13
IC292	*E15	IC398	*J7	RB51	*D13
IC293	*E11	IC399	*J8	RB52	*D13
IC294	*E11	IC400	*L14	RB53	*D14
IC295	*E12	IC401	*H4	RB54	*E11
IC296	*E16	IC402	*K10	RB55	*E11
IC297	*E17	IC403	*M10	RB56	*E12
IC298	*E18	IC404	*K3	RB57	*E12
IC299	*E18	IC405	*K3	RB58	*E12
IC300	*E1	IC406	*K9	RB59	*E13
IC301	*E2	IC407	*M4	RB60	*E11
IC302	*E3	IC408	M4	RB61	*E11
IC303	*E4	IC409	*K7	RB62	*E11
IC306	*E14	IC410	*K7	RB63	*E11
IC307	*E15	IC411	*K8	RB64	*E12
IC308	*F1	IC412	*K10	RB65	*E12
IC309	*F2	IC413	M11	RB66	*H15
IC310	*F3	IC414	*M16	RB67	*H15
IC312	*F16	IC415	*M18	RB68	*H16
IC313	*F17	IC416	*N11	RB69	*H16
IC314	*F18	IC417	*P11		
IC315	*F18	IC418	*M7	TP1	B18
IC316	*F10	IC419	*L10	TP2	C15
IC317	*F14	IC420	*M9	TP3	E11
IC318	*H4	IC421	*N10	TP4	E12
IC321	D8	IC422	*P10	TP5	E15
IC322	*G14	IC423	*N7	TP6	F15
IC323	*G15	IC424	*P7	TP7	F14
IC325	H4	IC425	*N16	TP8	G13
IC326	*G10	IC426	*N6	TP9	G15
IC327	*G13	IC427	*P6	TP10	L14
IC328	*G14	IC500	D10	TP11	L14
IC329	*G15	IC501	*D10	TP12	L14
IC330	*G16	IC502	F5	TP13	L14
IC331	*G18	IC503	*F5	TP14	L14
IC332	*G2	IC504	*H8	TP15	L14
IC333	*F7	IC507	*M4	TP16	L15
IC334	F8	IC508	*M10	TP17	L15
IC335	*D5	IC509	L12	TP18	L15
IC337	*J12	IC510	*L12	TP19	L15
IC338	*H10	IC511	P5	TP20	M14
IC339	*H11	IC512	N5	TP21	M14
IC340	*H15	IC513	G4	TP22	M15
IC342	*F8	IC514	*G4	TP23	M15
IC343	*F8	IC515	*G4	TP24	M15
IC344	F8	IC516	C2	TP25	M15
IC345	*H16	IC517	*F4		
IC346	*H17	IC518	F4	*:B SIDE	
IC347	*H18	IC519	G4		
IC348	*H13	IC520	E1		
IC349	*H14	IC521	K13		
IC350	F7	IC522	K14		
IC351	*E4	IC523	J13		

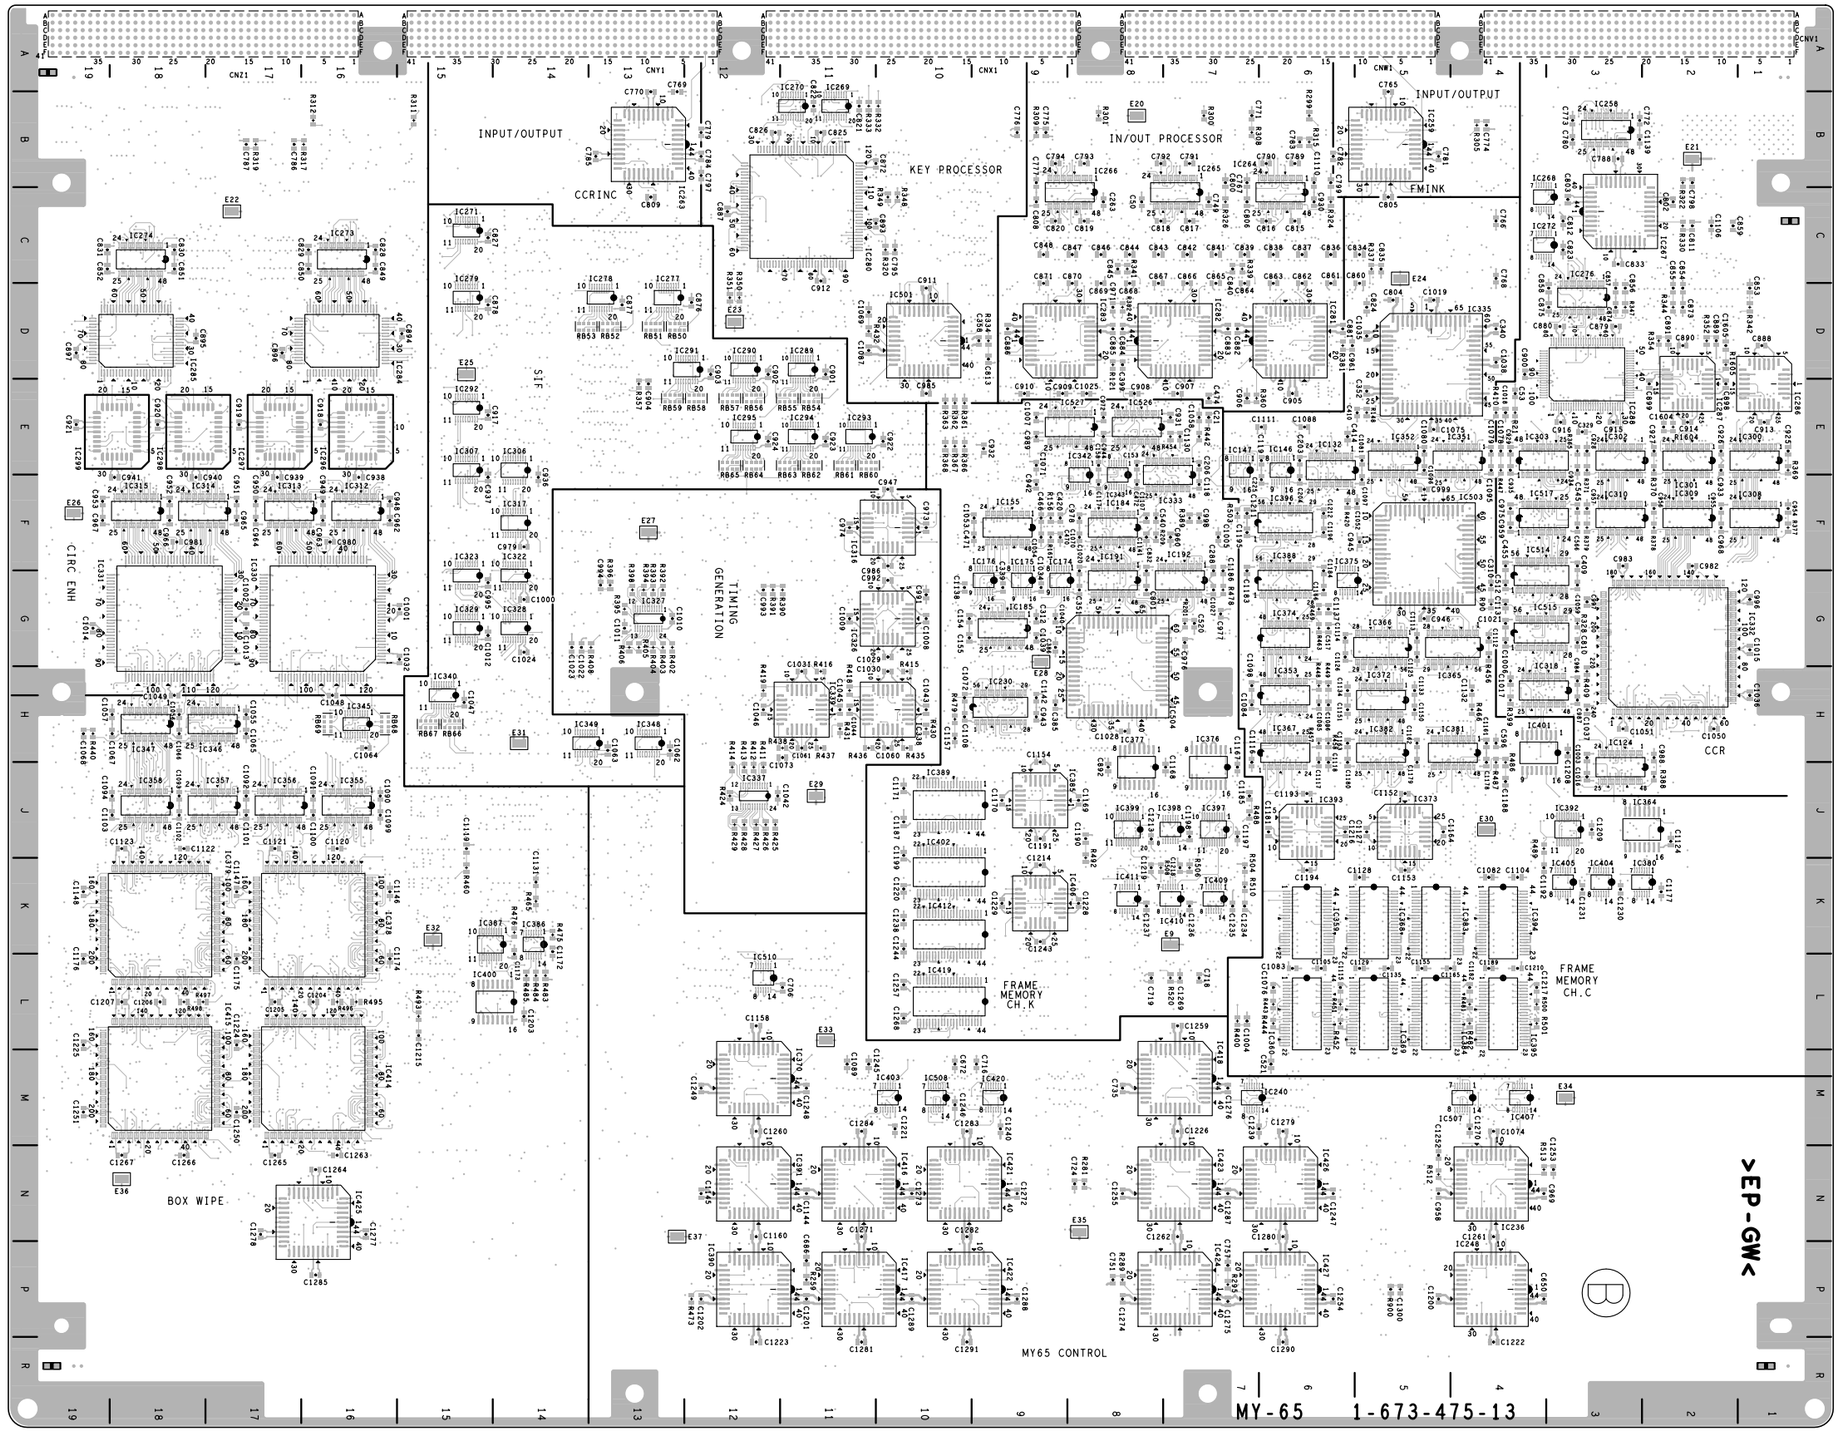

MY-65 -B SIDE-
SUFFIX: -11, 13

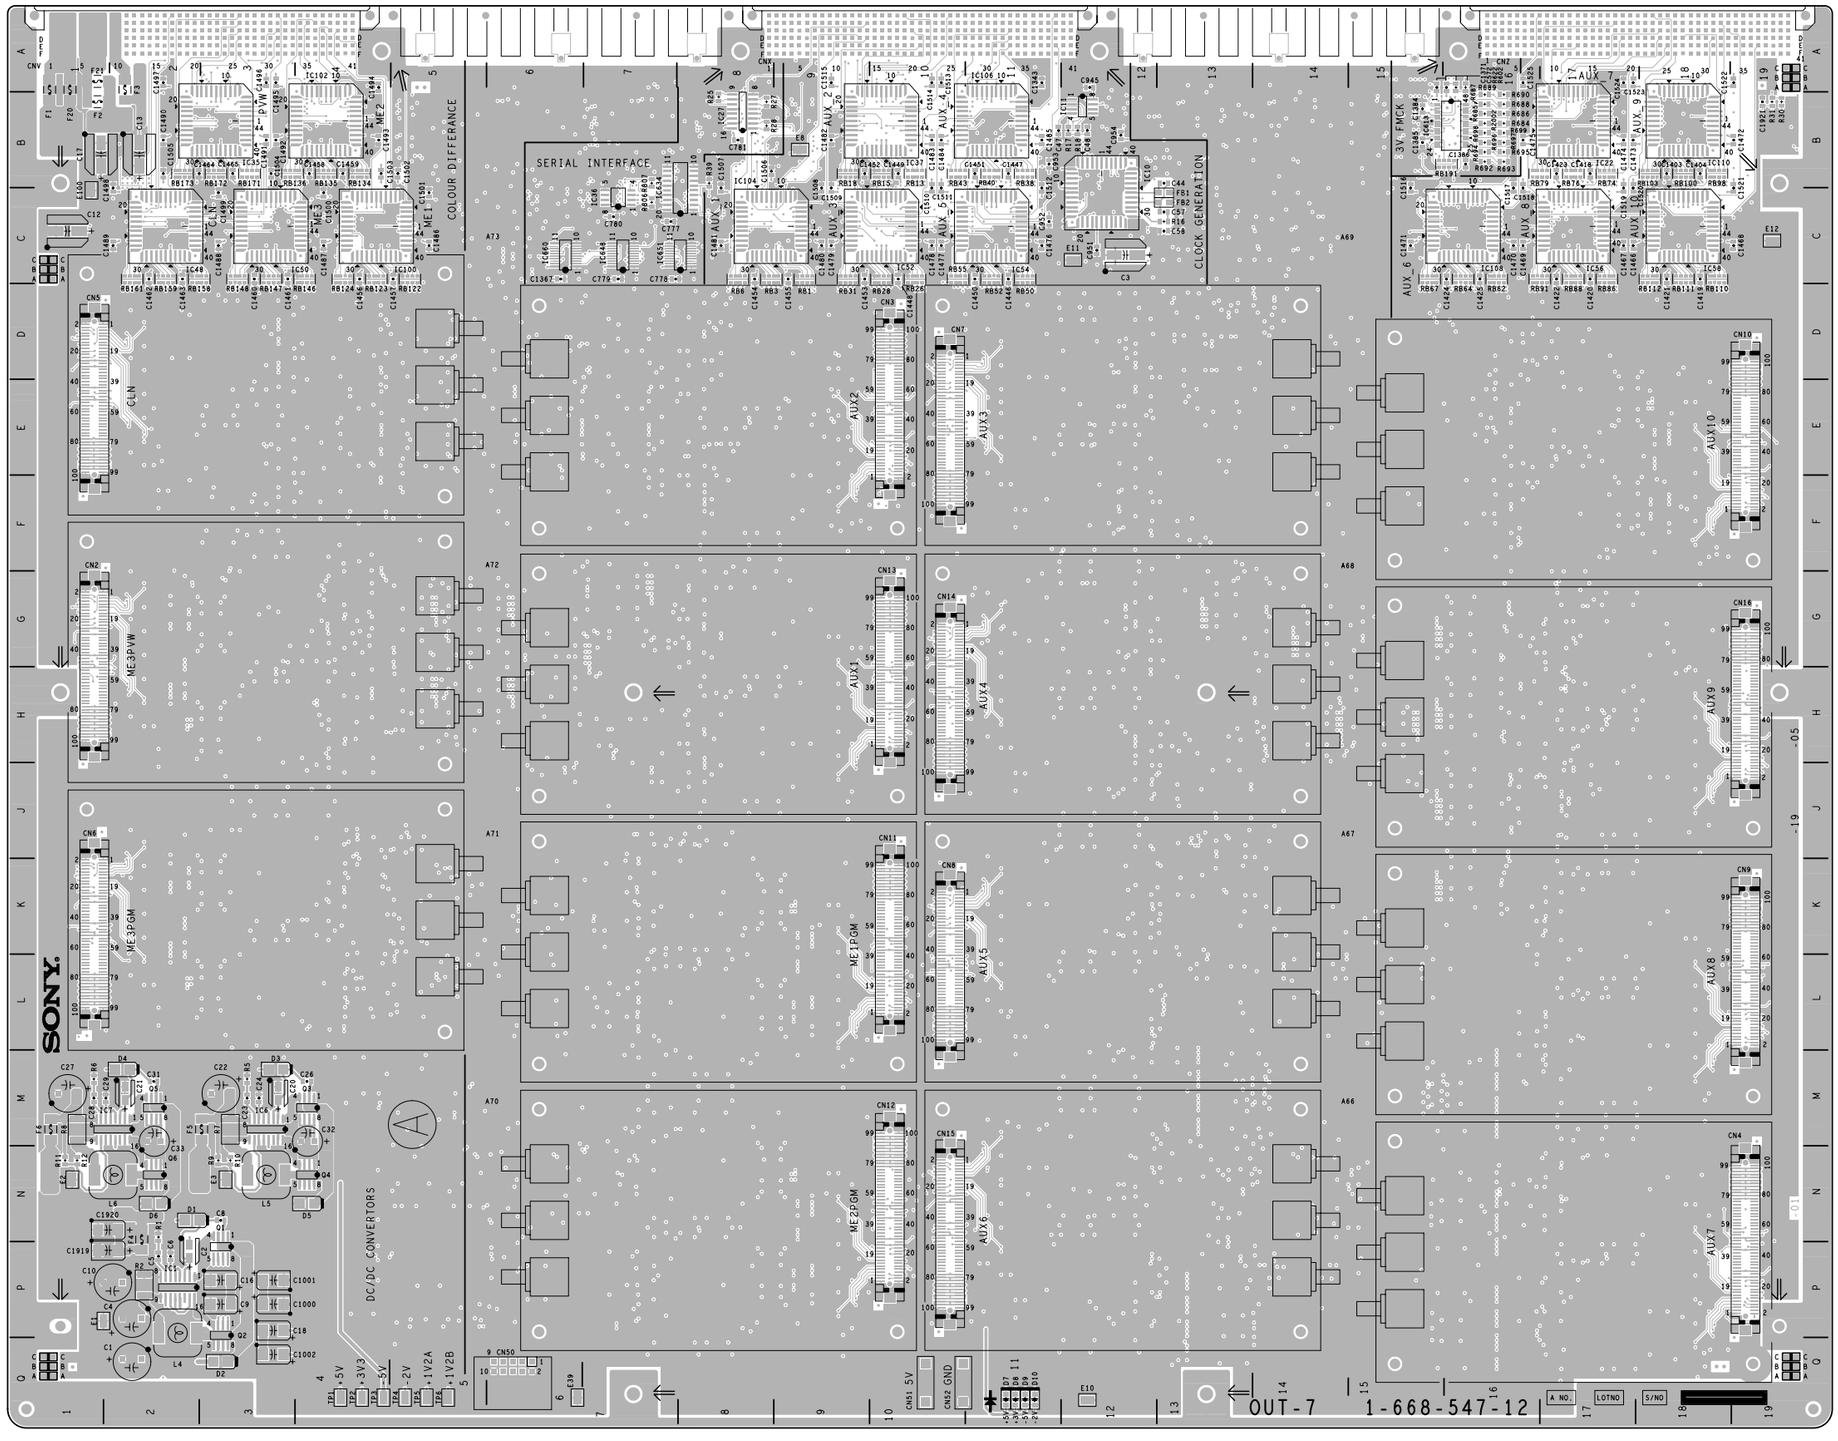


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 through 11040

OUT-7 -A SIDE-
SUFFIX: -12


OUT-7 (1-668-547-12)

CN2	G1	IC19	*E9	IC117	*G8
CN3	E10	IC20	*P18	IC118	*G12
CN4	N19	IC21	*P17	IC119	*H12
CN5	E1	IC22	B17	IC120	*N12
CN6	K1	IC23	*H3	IC121	*P12
CN7	E10	IC24	*G3	IC122	*J17
CN8	L10	IC25	*B10	IC123	*G17
CN9	L19	IC26	*N18	IC124	*L9
CN10	E19	IC27	B8	IC125	*K9
CN11	K10	IC28	*E9	IC126	*L9
CN12	N10	IC29	*N14	IC127	*K9
CN13	H10	IC30	*D9	IC128	*P9
CN14	H10	IC31	*P18	IC129	*N9
CN15	N10	IC32	*N18	IC130	*P9
CN16	H19	IC33	*B17	IC131	*N9
CN50	Q6	IC34	*B3	IC132	*J9
CN51	Q10	IC35	B3	IC133	*G9
CN52	Q10	IC36	C7	IC134	*H9
		IC37	B10	IC135	*H9
D1	N2	IC38	*F8	IC136	*G11
D2	Q3	IC39	*F9	IC137	*H11
D3	M3	IC40	*N17	IC138	*G11
D4	M2	IC41	*B12	IC139	*H11
D5	N4	IC42	*B15	IC140	*M11
D6	N2	IC43	*B7	IC141	*P11
D7	Q11	IC46	*D13	IC142	*N11
D8	Q11	IC47	*B13	IC143	*N11
D9	Q11	IC48	C2	IC144	*J18
D10	Q11	IC49	*C2	IC145	*G18
		IC50	C3	IC146	*H18
E1	P1	IC51	*C3	IC147	*H18
E2	N1	IC52	C10	IC300	*P13
E3	N3	IC53	*C10	IC301	*P16
E4	*J6	IC54	C11	IC302	*N16
E5	*F4	IC55	*C11	IC303	*M16
E6	*M16	IC56	C17	IC305	*M13
E7	*G9	IC57	*C17	IC508	*G13
E8	B9	IC58	C18	IC509	*G14
E9	*Q8	IC59	*C18	IC510	*H14
E10	Q12	IC60	*D3	IC511	*H15
E11	C12	IC61	*F3	IC512	*K16
E12	C19	IC62	*K3	IC513	*J16
E13	*D18	IC63	*L3	IC514	*H16
E14	*K18	IC64	*D12	IC515	*G16
E15	*Q16	IC65	*F12	IC521	*F17
E16	*Q11	IC66	*K12	IC528	*E17
E17	*Q4	IC67	*L12	IC536	*G7
E18	*K14	IC68	*M17	IC538	*L8
E19	*K9	IC69	*K17	IC543	*H6
E20	*J2	IC70	*F17	IC545	*K8
E21	*D12	IC71	*E17	IC553	*G6
E22	*D6	IC72	*D2	IC555	*P8
E23	*D1	IC73	*E2	IC560	*H6
E24	*C6	IC74	*E2	IC562	*N8
E25	*A13	IC75	*E2	IC569	*K5
E26	*B19	IC76	*J2	IC570	*L5
E27	*G15	IC77	*L2	IC572	*H5
E28	*F7	IC78	*K2	IC574	*K3
E29	*M7	IC79	*K2	IC579	*G5
E30	*M14	IC80	*D11	IC581	*L3
E31	*M11	IC81	*F11	IC584	*N6
E32	*M9	IC82	*E11	IC585	*N6
E33	*N1	IC83	*E11	IC586	*P5
E34	*F2	IC84	*K11	IC587	*N6
E35	*F11	IC85	*L11	IC593	*G3
E36	*C15	IC86	*K11	IC600	*H3
E37	*P19	IC87	*L11	IC607	*C12
E38	*J11	IC88	*M18	IC608	*C13
E39	Q6	IC89	*K18	IC609	*C14
E100	C1	IC90	*L18	IC610	*B14
		IC91	*L18	IC611	*B12
		IC92	*F18	IC613	B16
F1	A1	IC93	*E18	IC614	*J13
F2	B1	IC94	*F18	IC618	*J13
F3	A2	IC95	*E18	IC621	*J7
F4	N2	IC96	*D5	IC623	*L13
F5	M3	IC97	*E4	IC624	*L6
F6	M1	IC99	*E6	IC626	*L15
F20	A1	IC100	C4	IC628	*K6
F21	A1	IC101	*C4	IC634	C8
		IC102	B4	IC635	*C7
FB1	C13	IC103	*B4	IC636	*C7
FB2	C13	IC104	C8	IC637	*C6
		IC105	*C8	IC638	*C8
IC1	P2	IC106	B11	IC639	*B8
IC6	M3	IC107	*B11	IC640	*B9
IC7	M2	IC108	C16	IC642	*C5
IC10	C12	IC109	*C16	IC644	*B5
IC11	B12	IC110	B18	IC645	*B5
IC13	*H2	IC111	*B18	IC646	*B6
IC14	*G2	IC112	*L8	IC648	C7
IC15	*H2	IC113	*K8	IC649	*C6
IC16	*G2	IC114	*P8	IC650	*C6
IC17	*B9	IC115	*N8	IC651	C8
IC18	*D8	IC116	*H8	IC652	*C7

IC653	*E7	RB83	*J16	RB205	*D5
IC654	*E6	RB84	*J16	RB206	*E7
IC655	*D4	RB85	*B17	RB207	*E4
IC656	*E7	RB86	C17	RB208	*D7
IC657	*E5	RB87	*H16	RB209	*D4
IC658	*D7	RB88	C17	RB210	*D7
IC659	*F7	RB89	*H16	RB211	*E4
IC660	C6	RB90	*H16	RB212	*D6
IC661	*C8	RB91	C16	RB213	*D7
IC662	*F4	RB92	*C16	RB214	*E4
IC663	*E5	RB93	*G16	RB215	*E6
IC664	*E5	RB94	*C17	RB216	*E6
IC665	*E4	RB95	*G16	RB217	*F7
IC666	*E5	RB96	*G16	RB218	*D6
IC667	*D5	RB97	*C17	RB222	*E5
IC700	*E14	RB98	B18	RB223	*E5
IC701	*E13	RB100	B18	RB224	*F4
IC702	*F15	RB103	B18	RB400	*P13
IC703	*F14	RB104	*B18	RB401	*P13
IC706	*B8	RB106	*B18	RB402	*P13
IC707	*K13	RB109	*B18	RB403	*Q13
IC708	*J13	RB110	C18	RB404	*P16
IC800	*H13	RB111	C18	RB405	*N16
IC3000	*F6	RB112	C18	RB406	*N16
IC3001	*M5	RB113	*C18	RB407	*N16
IC3002	*L6	RB114	*C18	RB408	*Q16
		RB115	*C18	RB409	*Q16
L4	P2	RB122	C5	RB410	*P16
L5	N3	RB123	C4	RB411	*P16
L6	N2	RB124	C4	RB412	*M16
		RB125	*C4	RB413	*M16
Q1	P3	RB126	*C4	RB414	*M16
Q2	P3	RB127	*C5	RB415	*M16
Q3	M4	RB128	*F7	RB420	*M13
Q4	N4	RB129	*G7	RB421	*M13
Q5	M2	RB130	*G7	RB422	*M13
Q6	N2	RB131	*G6	RB423	*M13
		RB132	*G6	RB3000	*F18
RB1	C9	RB133	*H6	RB3001	*F18
RB3	C8	RB134	B4	RB3002	*F18
RB6	C8	RB135	B4	RB3003	*E18
RB7	*C8	RB136	B3	RB3004	*E18
RB9	*C8	RB137	*B3	RB3005	*E18
RB12	*C9	RB138	*B4	RB3006	*L9
RB13	B10	RB139	*B4	RB3007	*L9
RB15	B10	RB140	*G5	RB3008	*L9
RB18	B9	RB141	*G5	RB3009	*L9
RB20	*B9	RB142	*G5	RB3010	*K9
RB22	*B10	RB143	*H5	RB3011	*K9
RB25	*B10	RB144	*H5	RB3012	*P9
RB26	C10	RB145	*H5	RB3013	*P9
RB28	C10	RB146	C4	RB3014	*P9
RB31	C9	RB147	C3	RB3015	*N9
RB32	*C9	RB148	C3	RB3016	*N9
RB34	*C10	RB149	*C3	RB3017	*N9
RB37	*C10	RB150	*C3	RB3018	*J2
RB38	B11	RB151	*C4	RB3019	*K2
RB40	B11	RB152	*H4	RB3020	*K2
RB43	B10	RB153	*H4	RB3021	*K2
RB44	*B10	RB154	*H4	RB3022	*K2
RB46	*B11	RB155	*G4	RB3023	*L2
RB49	*B11	RB156	*G4	RB3024	*G2
RB50	C11	RB157	*G4	RB3025	*G2
RB51	*G14	RB158	C2	RB3026	*G2
RB52	C11	RB159	C2	RB3027	*H2
RB53	*G14	RB161	C2	RB3028	*H2
RB54	*G14	RB165	*C2	RB3029	*H2
RB55	C10	RB166	*C2		
RB56	*C10	RB168	*C2	TP1	Q4
RB57	*G15	RB171	B3	TP2	Q4
RB58	*C11	RB172	B3	TP3	Q4
RB59	*G15	RB173	B2	TP4	Q5
RB60	*G15	RB174	*B2	TP5	Q5
RB61	*C11	RB175	*B3	TP6	Q5
RB62	C16	RB176	*B3	TP21	*B6
RB63	*H14	RB183	*B15	TP22	*B5
RB64	C16	RB184	*B15	TP23	*C15
RB65	*H14	RB185	*A15	TP24	*C14
RB66	*H14	RB186	*A15	TP50	*L7
RB67	C15	RB187	*B12	TP63	*J3
RB68	*C15	RB189	*B16	TP100	*D7
RB69	*H15	RB190	*A16	TP101	*C6
RB70	*C16	RB191	B16	TP102	*D7
RB71	*H15	RB192	*B16	TP103	*D6
RB72	*H15	RB194	*D5	TP104	*C7
RB73	*C16	RB195	*E6	TP105	*D5
RB74	B17	RB196	*D5	TP106	*C5
RB75	*K16	RB197	*D6	TP107	*C5
RB76	B17	RB198	*D4	TP1000	*L5
RB77	*K16	RB199	*E7	TP1001	*L5
RB78	*K16	RB200	*D4		
RB79	B16	RB201	*E7	*:B SIDE	
RB80	*B16	RB202	*E6		
RB81	*J16	RB203	*E5		
RB82	*B17	RB204	*E6		

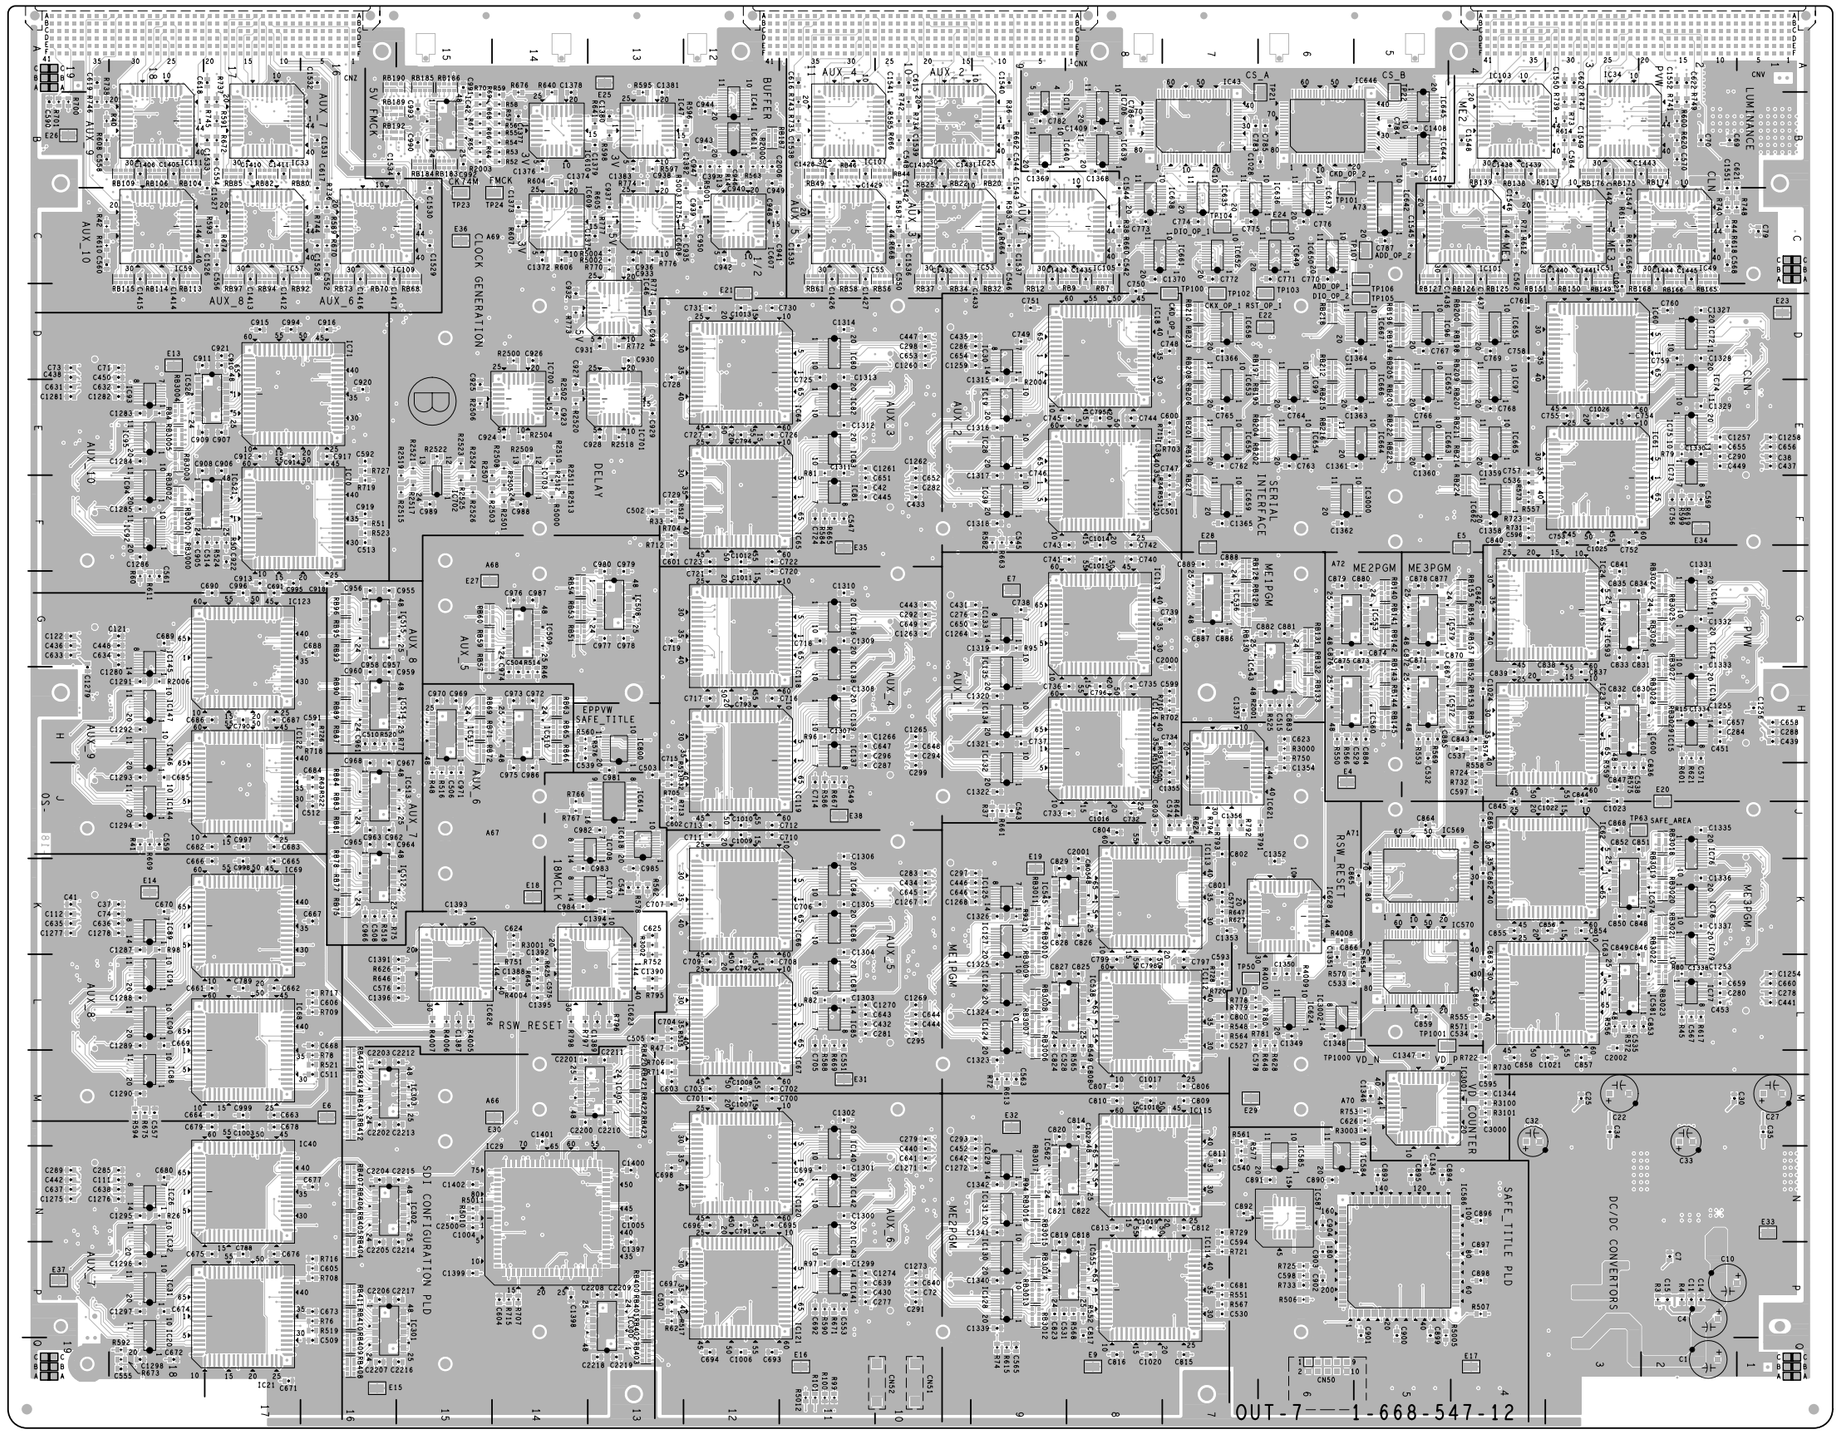

OUT-7 -B SIDE-
SUFFIX: -12

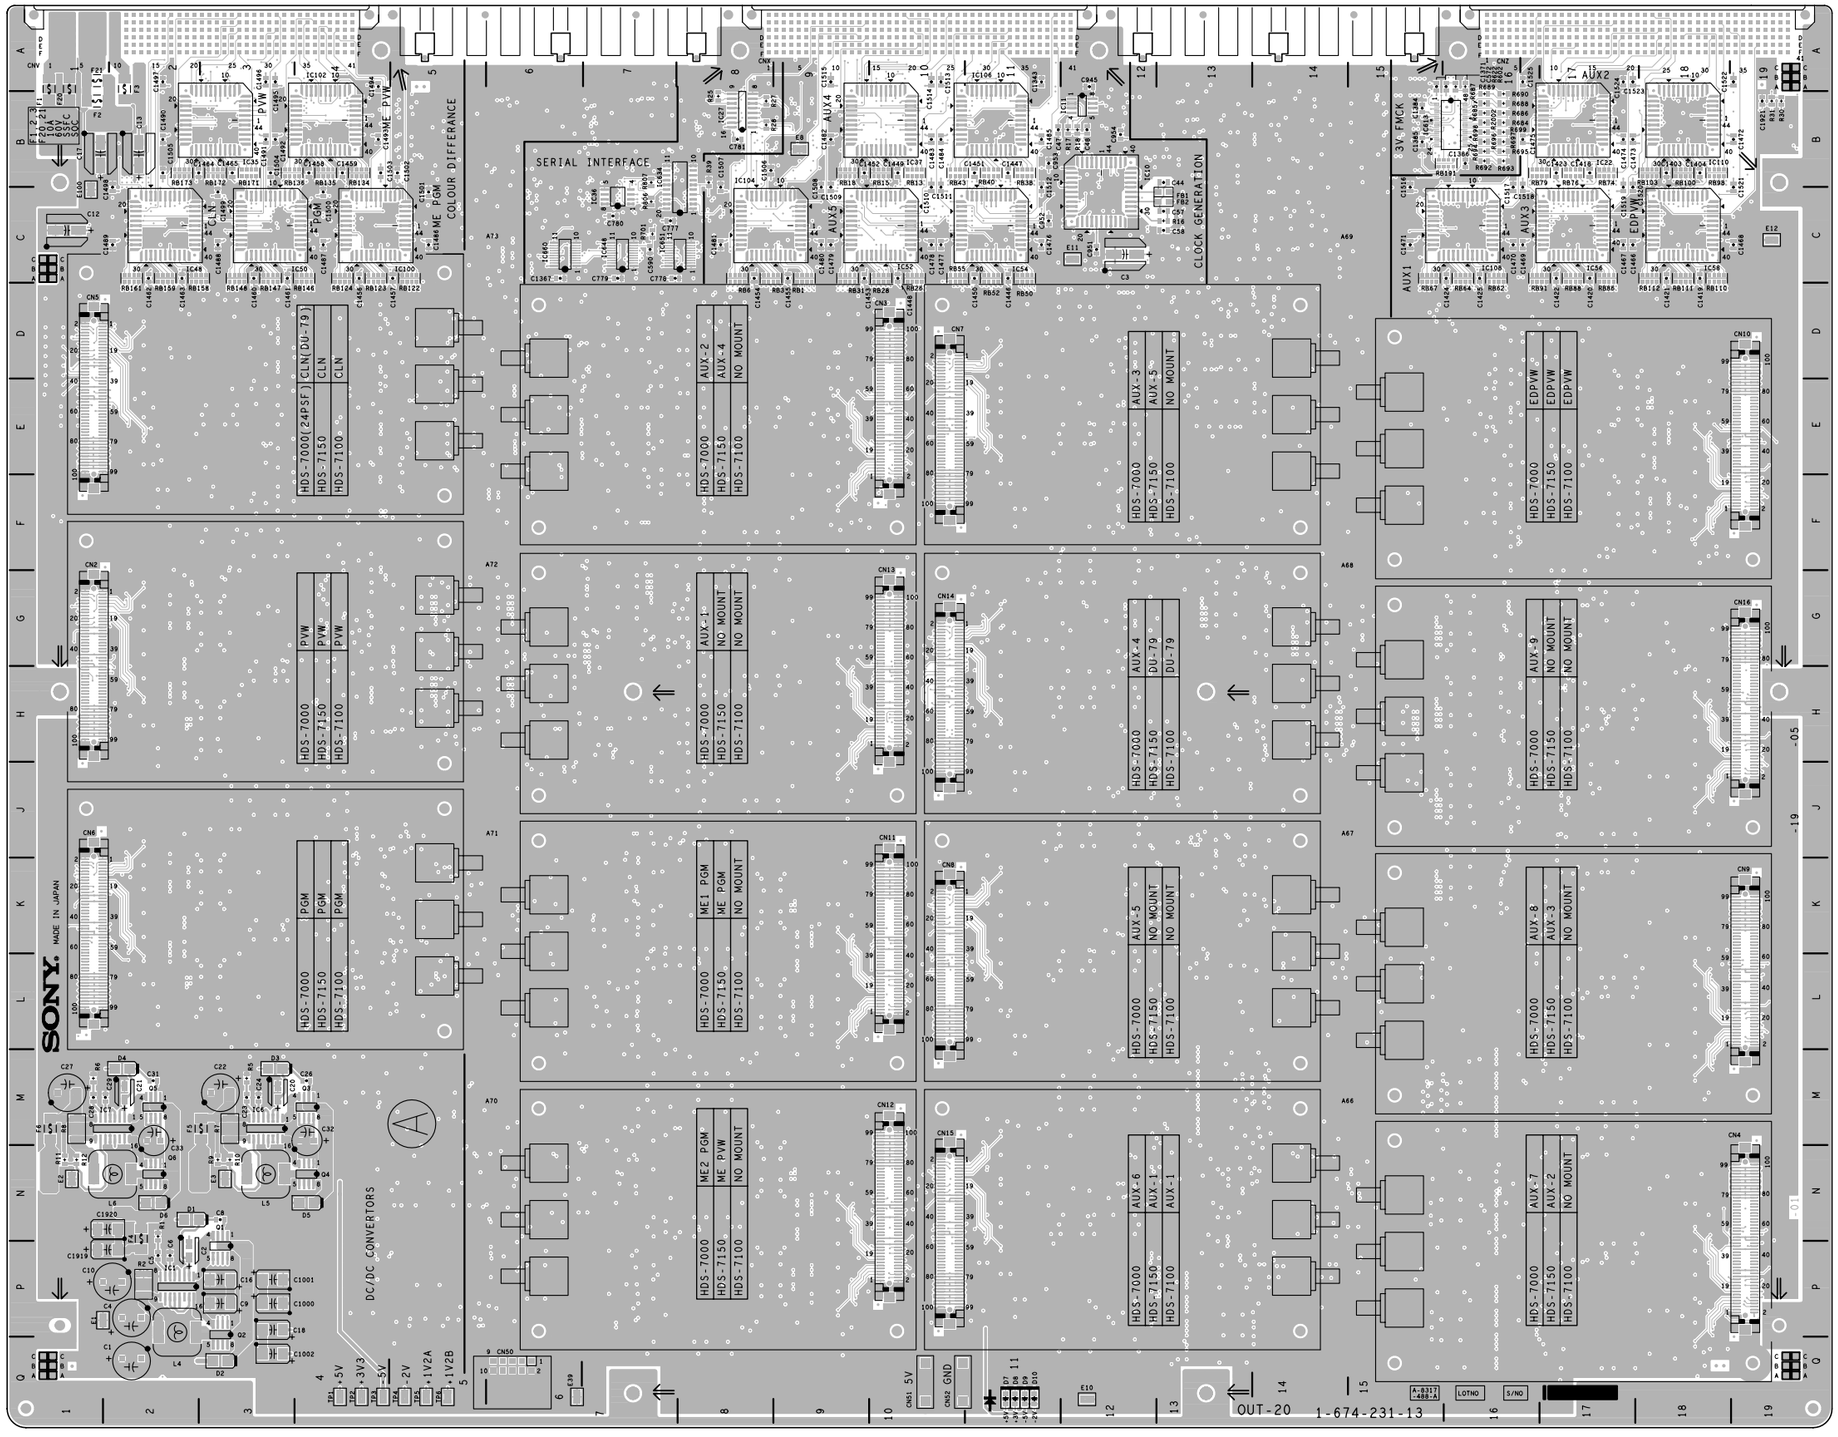


OUT-20 (1-674-231-13)

CL1A	A19	FB1	C13	IC106	B11
CL1B	A19	FB2	C13	IC107	*B11
CL1C	A19			IC108	C16
CL2A	Q19	IC1	P2	IC109	*C16
CL2B	Q19	IC6	M3	IC110	B18
CL2C	Q19	IC7	M2	IC111	*B18
CL3A	Q1	IC10	C12	IC112	*L8
CL3B	Q1	IC11	B12	IC113	*K8
CL3C	Q1	IC13	*H2	IC114	*P8
CL4A	C1	IC14	*G2	IC115	*N8
CL4B	C1	IC15	*H2	IC116	*H8
CL4C	C1	IC16	*G2	IC117	*G8
		IC17	*B9	IC118	*G12
CN2	G1	IC18	*D8	IC119	*H12
CN3	E10	IC19	*E9	IC120	*N12
CN4	N19	IC20	*P18	IC121	*P12
CN5	E1	IC21	*P17	IC122	*J17
CN6	K1	IC22	B17	IC123	*G17
CN7	E10	IC23	*H3	IC124	*L9
CN8	L10	IC24	*G3	IC125	*K9
CN9	L19	IC25	*B10	IC126	*L9
CN10	E19	IC26	*N18	IC127	*K9
CN11	K10	IC27	B8	IC128	*P9
CN12	N10	IC28	*E9	IC129	*N9
CN13	H10	IC29	*N14	IC130	*P9
CN14	H10	IC30	*D9	IC131	*N9
CN15	N10	IC31	*P18	IC132	*J9
CN16	H19	IC32	*N18	IC133	*G9
CN50	Q6	IC33	*B17	IC134	*H9
CN51	R10	IC34	*B3	IC135	*H9
CN52	R10	IC35	B3	IC136	*G11
		IC36	C7	IC137	*H11
CNV1	A1	IC37	B10	IC138	*G11
		IC38	*F8	IC139	*H11
CNX1	A8	IC39	*F9	IC140	*M11
		IC40	*N17	IC141	*P11
CNZ1	A16	IC41	*B12	IC142	*N11
		IC42	*B15	IC143	*N11
D1	N2	IC43	*B7	IC144	*J18
D2	Q3	IC46	*D13	IC145	*G18
D3	M3	IC47	*B13	IC146	*H18
D4	M2	IC48	C2	IC147	*H18
D5	N4	IC49	*C2	IC300	*P13
D6	N2	IC50	C3	IC301	*P16
D7	R11	IC51	*C3	IC302	*N16
D8	R11	IC52	C10	IC303	*M16
D9	R11	IC53	*C10	IC305	*M13
D10	R11	IC54	C11	IC508	*G13
		IC55	*C11	IC509	*G14
E1	P1	IC56	C17	IC510	*H14
E2	N1	IC57	*C17	IC511	*H15
E3	N3	IC58	C18	IC512	*K16
E4	*J6	IC59	*C18	IC513	*J16
E5	*F4	IC60	*D3	IC514	*H16
E6	*M16	IC61	*F3	IC515	*G16
E7	*G9	IC62	*K3	IC521	*F17
E8	B9	IC63	*L3	IC528	*E17
E9	*Q8	IC64	*D12	IC536	*G7
E10	R12	IC65	*F12	IC538	*L8
E11	C12	IC66	*K12	IC543	*H6
E12	C19	IC67	*L12	IC545	*K8
E13	*D18	IC68	*M17	IC553	*G6
E14	*K18	IC69	*K17	IC555	*P8
E15	*Q16	IC70	*F17	IC560	*H6
E16	*Q11	IC71	*E17	IC562	*N8
E17	*Q4	IC72	*D2	IC569	*K5
E18	*K14	IC73	*E2	IC570	*L5
E19	*K9	IC74	*E2	IC572	*H5
E20	*J2	IC75	*E2	IC574	*K3
E21	*D12	IC76	*J2	IC579	*G5
E22	*D6	IC77	*L2	IC581	*L3
E23	*D1	IC78	*K2	IC584	*N6
E24	*C6	IC79	*K2	IC585	*N6
E25	*A13	IC80	*D11	IC586	*P5
E26	*B19	IC81	*F11	IC587	*N6
E27	*G15	IC82	*E11	IC593	*G3
E28	*F7	IC83	*E11	IC600	*H3
E29	*M7	IC84	*K11	IC607	*C12
E30	*M14	IC85	*L11	IC608	*C13
E31	*M11	IC86	*K11	IC609	*C14
E32	*M9	IC87	*L11	IC610	*B14
E33	*N1	IC88	*M18	IC611	*B12
E34	*F2	IC89	*K18	IC613	B16
E35	*F11	IC90	*L18	IC614	*J13
E36	*C15	IC91	*L18	IC618	*J13
E37	*P19	IC92	*F18	IC621	*J7
E38	*J11	IC93	*E18	IC623	*L13
E39	R6	IC94	*F18	IC624	*L6
E100	C1	IC95	*E18	IC626	*L15
		IC96	*D5	IC628	*K6
F1	A1	IC97	*E4	IC634	C8
F2	B1	IC99	*E6	IC635	*C7
F3	A2	IC100	C4	IC636	*C7
F4	N2	IC101	*C4	IC637	*C6
F5	M3	IC102	B4	IC638	*C8
F6	M1	IC103	*B4	IC639	*B8
F20	A1	IC104	C8	IC640	*B9
F21	A1	IC105	*C8	IC642	*C5


HDS-7000 (UCJ) : S/N 11041 and Higher
HDS-7000 (SY) : S/N 12001 and Higher

OUT-20 -A SIDE-
SUFFIX: -13

IC644	*B5	RB78	*K16	RB203	*E5
IC645	*B5	RB79	B16	RB204	*E6
IC646	*B6	RB80	*B16	RB205	*D5
IC648	C7	RB81	*J16	RB206	*E7
IC649	*C6	RB82	*B17	RB207	*E4
IC650	*C6	RB83	*J16	RB208	*D7
IC651	C8	RB84	*J16	RB209	*D4
IC652	*C7	RB85	*B17	RB210	*D7
IC653	*E7	RB86	C17	RB211	*E4
IC654	*E6	RB87	*H16	RB212	*D6
IC655	*D4	RB88	C17	RB213	*D7
IC656	*E7	RB89	*H16	RB214	*E4
IC657	*E5	RB90	*H16	RB215	*E6
IC658	*D7	RB91	C16	RB216	*E6
IC659	*F7	RB92	*C16	RB217	*F7
IC660	C6	RB93	*G16	RB218	*D6
IC661	*C8	RB94	*C17	RB222	*E5
IC662	*F4	RB95	*G16	RB223	*E5
IC663	*E5	RB96	*G16	RB224	*F4
IC664	*E5	RB97	*C17	RB301	*F7
IC665	*E4	RB98	B18	RB302	*E6
IC666	*E5	RB100	B18	RB303	*F4
IC667	*D5	RB103	B18	RB400	*P13
IC700	*E14	RB104	*B18	RB401	*P13
IC701	*E13	RB106	*B18	RB402	*P13
IC702	*F15	RB109	*B18	RB403	*Q13
IC703	*F14	RB110	C18	RB404	*P16
IC706	*B8	RB111	C18	RB405	*N16
IC707	*K13	RB112	C18	RB406	*N16
IC708	*J13	RB113	*C18	RB407	*N16
IC800	*H13	RB114	*C18	RB408	*Q16
IC3000	*F6	RB115	*C18	RB409	*Q16
IC3001	*M5	RB122	C5	RB410	*P16
IC3002	*L6	RB123	C4	RB411	*P16
		RB124	C4	RB412	*M16
L4	P2	RB125	*C4	RB413	*M16
L5	N3	RB126	*C4	RB414	*M16
L6	N2	RB127	*C5	RB415	*M16
		RB128	*F7	RB420	*M13
Q1	P3	RB129	*G7	RB421	*M13
Q2	P3	RB130	*G7	RB422	*M13
Q3	M4	RB131	*G6	RB423	*M13
Q4	N4	RB132	*G6	RB3000	*F18
Q5	M2	RB133	*H6	RB3001	*F18
Q6	N2	RB134	B4	RB3002	*F18
		RB135	B4	RB3003	*E18
RB1	C9	RB136	B3	RB3004	*E18
RB3	C8	RB137	*B3	RB3005	*E18
RB6	C8	RB138	*B4	RB3006	*L9
RB7	*C8	RB139	*B4	RB3007	*L9
RB9	*C8	RB140	*G5	RB3008	*L9
RB12	*C9	RB141	*G5	RB3009	*L9
RB13	B10	RB142	*G5	RB3010	*K9
RB15	B10	RB143	*H5	RB3011	*K9
RB18	B9	RB144	*H5	RB3012	*P9
RB20	*B9	RB145	*H5	RB3013	*P9
RB22	*B10	RB146	C4	RB3014	*P9
RB25	*B10	RB147	C3	RB3015	*N9
RB26	C10	RB148	C3	RB3016	*N9
RB28	C10	RB149	*C3	RB3017	*N9
RB31	C9	RB150	*C3	RB3018	*J2
RB32	*C9	RB151	*C4	RB3019	*K2
RB34	*C10	RB152	*H4	RB3020	*K2
RB37	*C10	RB153	*H4	RB3021	*K2
RB38	B11	RB154	*H4	RB3022	*K2
RB40	B11	RB155	*G4	RB3023	*L2
RB43	B10	RB156	*G4	RB3024	*G2
RB44	*B10	RB157	*G4	RB3025	*G2
RB46	*B11	RB158	C2	RB3026	*G2
RB49	*B11	RB159	C2	RB3027	*H2
RB50	C11	RB161	C2	RB3028	*H2
RB51	*G14	RB165	*C2	RB3029	*H2
RB52	C11	RB166	*C2		
RB53	*G14	RB168	*C2	TP1	R4
RB54	*G14	RB171	B3	TP2	R4
RB55	C10	RB172	B3	TP3	R4
RB56	*C10	RB173	B2	TP4	R5
RB57	*G15	RB174	*B2	TP5	R5
RB58	*C11	RB175	*B3	TP6	R5
RB59	*G15	RB176	*B3	TP21	*B6
RB60	*G15	RB183	*B15	TP22	*B5
RB61	*C11	RB184	*B15	TP23	*C15
RB62	C16	RB185	*A15	TP24	*C14
RB63	*H14	RB186	*A15	TP50	*L7
RB64	C16	RB187	*B12	TP63	*J3
RB65	*H14	RB189	*B16	TP100	*D7
RB66	*H14	RB190	*A16	TP101	*C6
RB67	C15	RB191	B16	TP102	*D7
RB68	*C15	RB192	*B16	TP103	*D6
RB69	*H15	RB194	*D5	TP104	*C7
RB70	*C16	RB195	*E6	TP105	*D5
RB71	*H15	RB196	*D5	TP106	*C5
RB72	*H15	RB197	*D6	TP107	*C5
RB73	*C16	RB198	*D4	TP1000	*L5
RB74	B17	RB199	*E7	TP1001	*L5
RB75	*K16	RB200	*D4		
RB76	B17	RB201	*E7	*:B SIDE	
RB77	*K16	RB202	*E6		

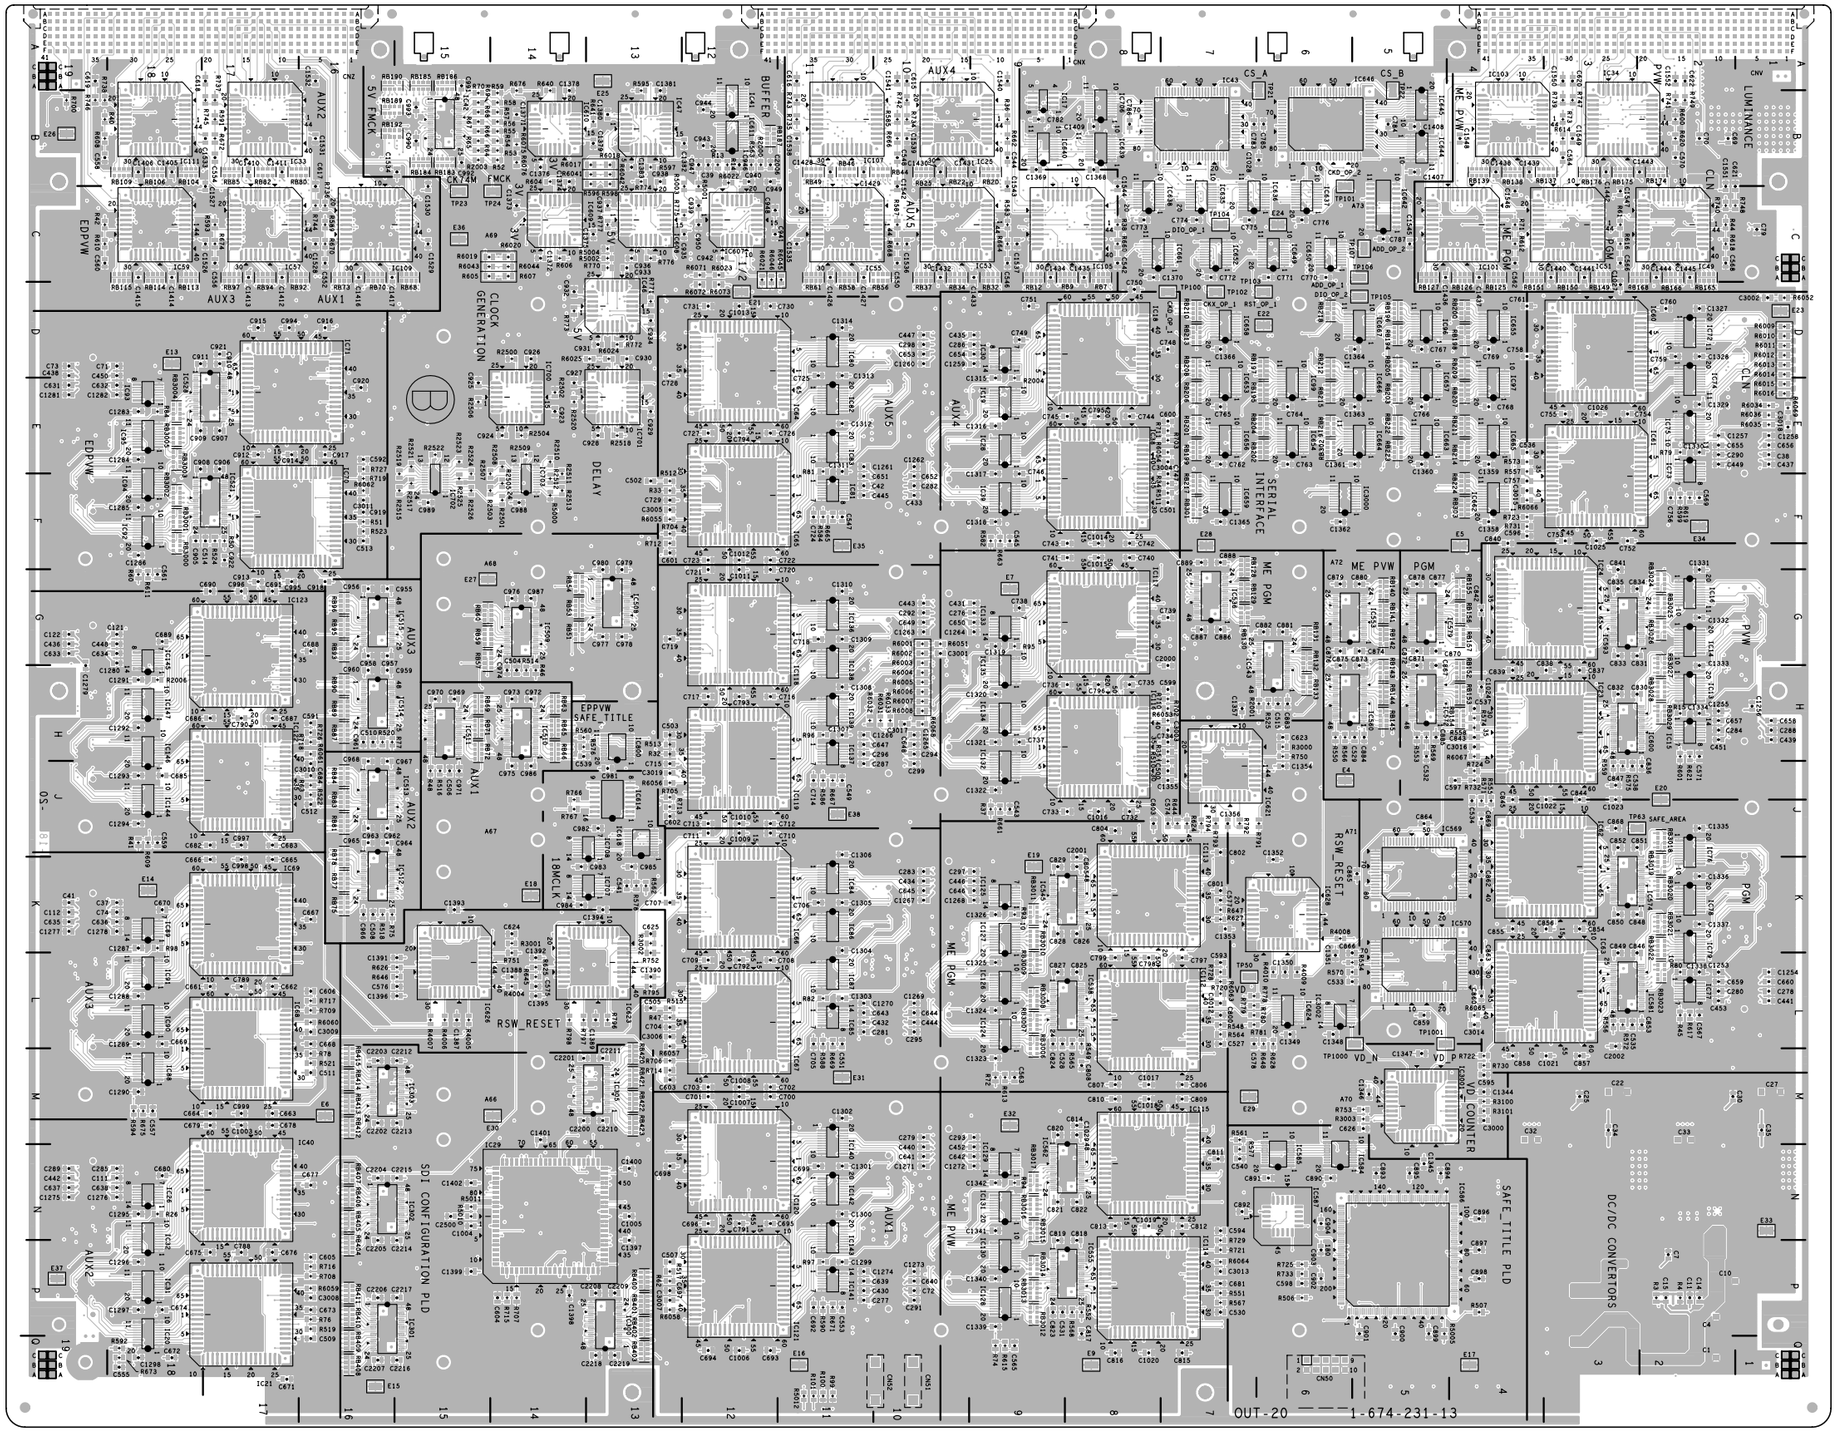

OUT-20 -B SIDE-
SUFFIX: -13

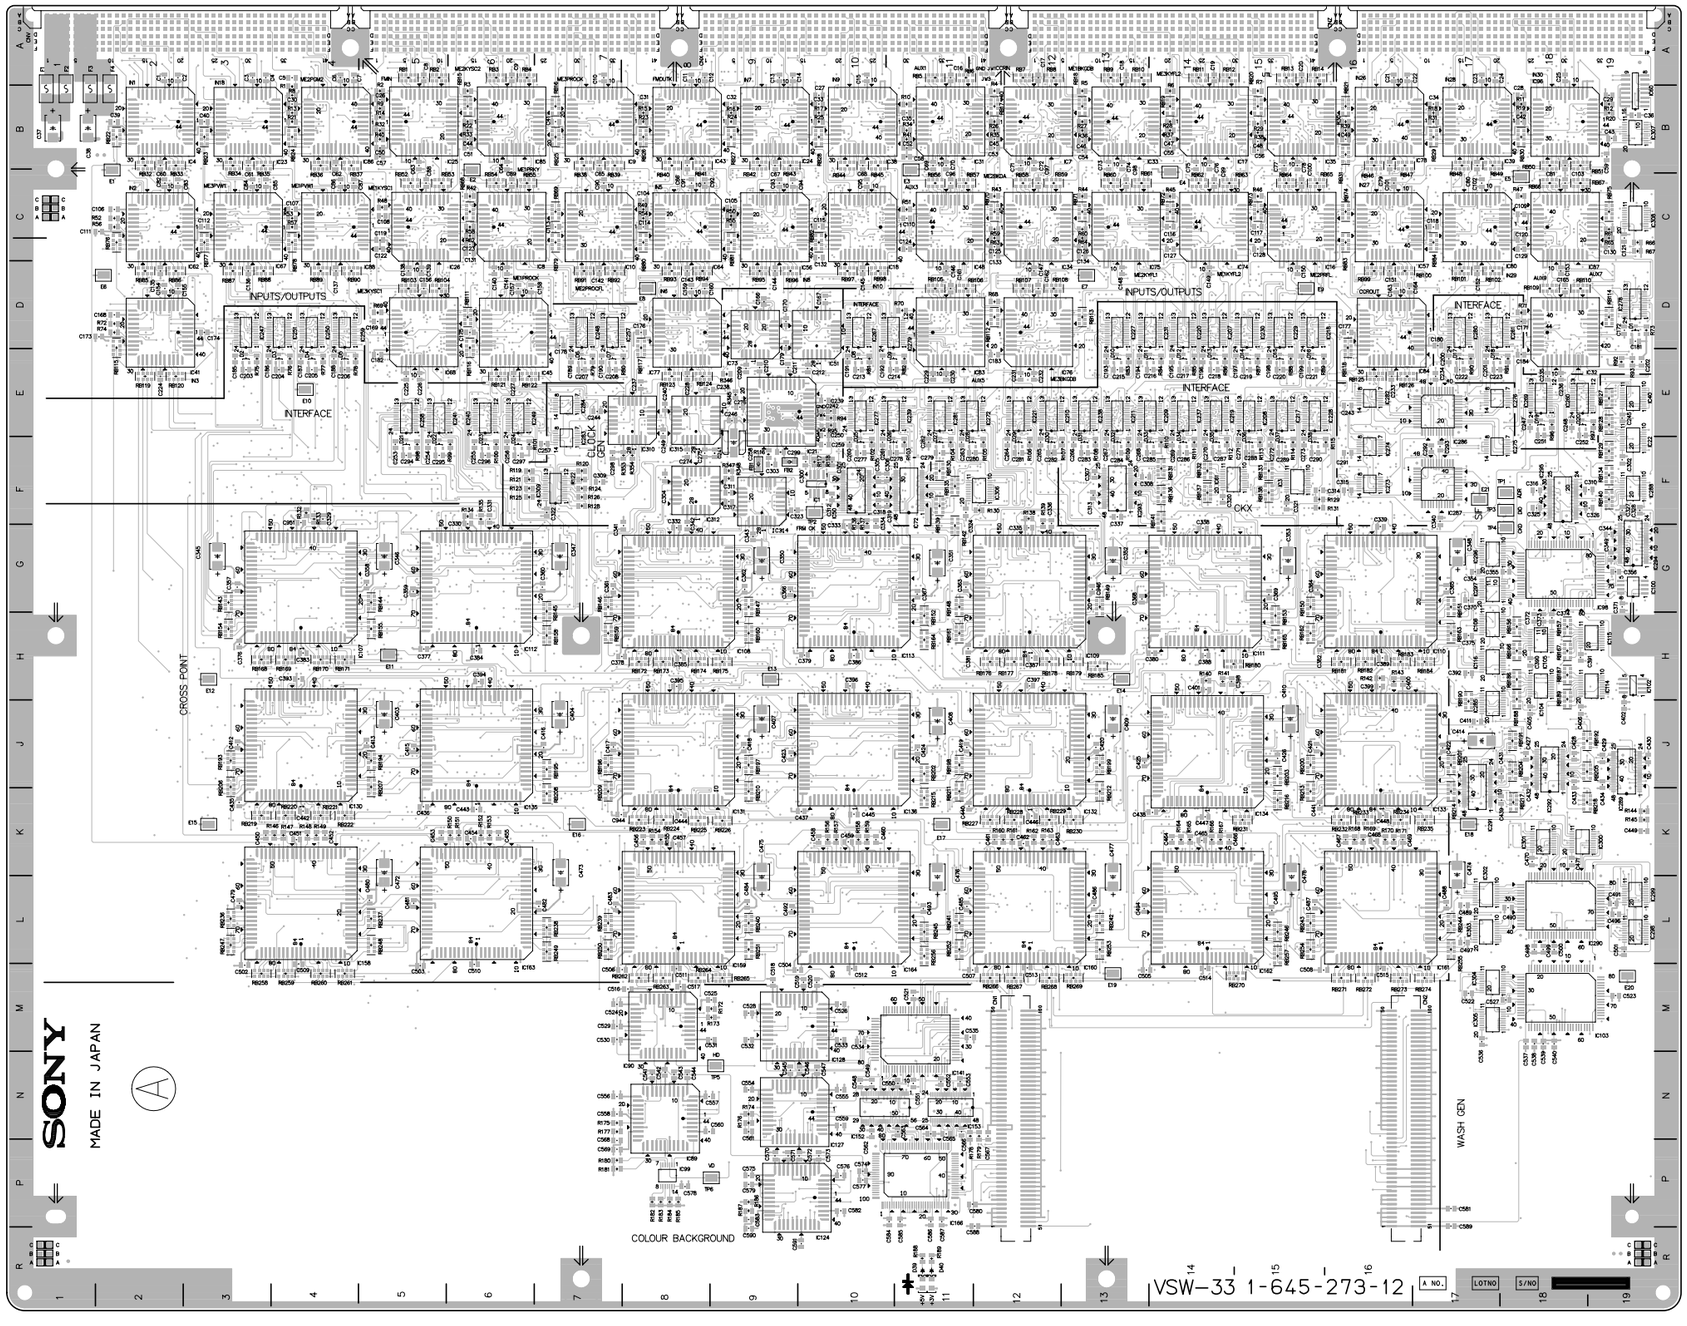


VSW-33 (1-645-273-12)

CN1	N12	E11	H5	IC60	B19	IC201	*F10	IC293	F13
CN2	N16	E12	H3	IC61	F14	IC202	*D14	IC294	G19
		E13	H9	IC62	C2	IC203	*E15	IC295	F18
D1	D19	E14	H13	IC63	*B3	IC204	*E13	IC296	G17
D2	E3	E15	K3	IC64	C8	IC205	*E12	IC297	G17
D3	E4	E16	K7	IC65	*B5	IC206	*E13	IC298	L19
D4	E4	E17	K11	IC66	*D5	IC207	D14	IC299	L19
D5	E4	E18	K17	IC67	C3	IC208	E15	IC300	K18
D6	E7	E19	M13	IC68	D5	IC209	E14	IC301	K18
D7	E7	E20	M19	IC69	*B11	IC210	E12	IC302	L17
D8	E10	E21	F17	IC70	*B7	IC211	E13	IC303	L17
D9	E11	E22	*B2	IC71	*C11	IC212	*E15	IC304	M17
D10	E13	E23	*B6	IC72	F11	IC213	*D15	IC305	M17
D11	E14	E24	*C14	IC73	D9	IC214	*E14	IC306	F12
D12	E14	E25	*C18	IC74	C14	IC215	*D14	IC307	B19
D13	E14	E26	*D13	IC75	C13	IC216	*E12	IC308	C19
D14	E15	E27	*D8	IC76	D12	IC217	E15	IC309	F7
D15	E15	E28	*E4	IC77	D8	IC218	D15	IC310	E8
D16	E15	E29	*H5	IC78	B16	IC219	E14	IC311	*F7
D17	E17	E30	*H9	IC79	*C16	IC220	D14	IC312	F8
D18	E17	E31	*H13	IC80	C17	IC221	E12	IC314	F9
D19	E18	E32	*K7	IC81	*B2	IC222	*D13	IC315	E8
D20	E18	E33	*K11	IC82	*D2	IC223	*E15	IC316	*F15
D21	F5	E34	*E16	IC83	D11	IC224	*D15		
D22	F5	E35	*F8	IC84	D16	IC225	*D15	RB1	A5
D23	F6			IC85	B6	IC226	*D13	RB2	A5
D24	F6	F1	B1	IC86	B4	IC227	D13	RB3	A6
D25	F10	F2	B1	IC87	C18	IC228	E15	RB4	A6
D26	F11	F3	B1	IC88	C4	IC229	D15	RB5	A11
D27	F11	F4	B2	IC89	N8	IC230	D15	RB6	A11
D28	F12			IC90	M8	IC231	D14	RB7	A12
D29	F12	FB1	F9	IC91	*C15	IC232	*E14	RB8	A12
D30	F12	FB2	F9	IC92	*B14	IC233	*E13	RB9	A13
D31	F13			IC93	*B13	IC234	*E10	RB10	A13
D32	F13	IC1	F10	IC94	*C10	IC235	*E6	RB11	A14
D33	F14	IC3	F15	IC95	*B16	IC236	*E5	RB12	A14
D34	F14	IC4	B2	IC96	B18	IC237	E14	RB13	A15
D35	F14	IC5	*B9	IC97	*B17	IC238	E13	RB14	A15
D36	F15	IC6	*D8	IC98	G18	IC239	E11	RB15	B6
D37	F15	IC7	B12	IC99	P8	IC240	E6	RB16	B7
D38	F15	IC8	C6	IC100	G19	IC241	E6	RB17	B12
D39	R11	IC9	B7	IC102	H19	IC242	*D3	RB18	B13
D40	R11	IC10	C7	IC103	M18	IC243	*D7	RB19	B14
D41	*D19	IC11	*B18	IC104	H18	IC244	*E6	RB20	B15
D42	*E3	IC12	*C4	IC105	H18	IC245	*D4	RB21	B16
D43	*E4	IC13	*C18	IC106	H17	IC246	*D4	RB22	B2
D44	*E4	IC14	*C12	IC107	G4	IC247	D3	RB23	B3
D45	*E4	IC15	*B15	IC108	G8	IC248	D7	RB24	B4
D46	*E7	IC16	C15	IC109	G12	IC249	E6	RB25	B7
D47	*E7	IC17	B14	IC110	G16	IC250	D4	RB26	B8
D48	*E10	IC18	C10	IC111	G14	IC251	D4	RB27	B9
D49	*E11	IC19	*B10	IC112	G6	IC252	*D7	RB28	B10
D50	*E13	IC20	*C17	IC113	G10	IC253	*E5	RB29	B17
D51	*E14	IC21	E9	IC114	H19	IC254	*D4	RB30	B18
D52	*E14	IC22	F19	IC115	H19	IC255	*E18	RB31	B16
D53	*E14	IC23	B3	IC116	H17	IC256	*D17	RB32	B2
D54	*E15	IC24	B9	IC117	*G4	IC257	D8	RB33	B2
D55	*E15	IC25	B5	IC118	*G8	IC258	E5	RB34	B3
D56	*E15	IC26	C5	IC119	*G12	IC259	D4	RB35	B3
D57	*E17	IC27	*C6	IC120	*G16	IC260	E19	RB36	B4
D58	*E17	IC28	*D6	IC121	*G14	IC261	D18	RB37	B4
D59	*E18	IC29	*D18	IC122	*G6	IC262	*D10	RB38	B7
D60	*E18	IC30	*C3	IC123	*G10	IC263	*E10	RB39	B7
D61	*F10	IC31	B11	IC124	P9	IC264	*D19	RB40	B8
D62	*F11	IC32	D18	IC127	N9	IC265	*D10	RB41	B8
D63	*F11	IC33	B13	IC128	M9	IC266	*D17	RB42	B9
D64	*F11	IC34	C12	IC130	J4	IC267	D10	RB43	B9
D65	*F12	IC35	B15	IC131	J8	IC268	*E11	RB44	B10
D66	*F12	IC36	*C14	IC132	J12	IC269	E18	RB45	B10
D67	*F13	IC37	*C9	IC133	J16	IC270	*E11	RB46	B16
D68	*F13	IC38	B10	IC134	J14	IC271	*E18	RB47	B16
D69	*F14	IC39	B17	IC135	J6	IC272	E12	RB48	B17
D70	*F14	IC40	E19	IC136	J10	IC273	F16	RB49	B17
D71	*F14	IC41	D2	IC141	M11	IC274	F16	RB50	B18
D72	*F15	IC42	*B8	IC143	*J4	IC275	F17	RB51	B18
D73	*F15	IC43	B8	IC144	*J8	IC276	E17	RB52	C5
D74	*F15	IC44	*C5	IC145	*J12	IC277	E10	RB53	C5
D75	*F5	IC45	D6	IC146	*J16	IC278	D19	RB54	C6
D76	*F5	IC46	*B6	IC147	*J14	IC279	D11	RB55	C6
D77	*F6	IC47	*C7	IC148	*J6	IC280	D17	RB56	C11
D78	*F6	IC48	C11	IC149	*J10	IC281	E11	RB57	C11
		IC49	*B4	IC152	N11	IC282	E16	RB58	C12
E1	C2	IC50	F10	IC153	N11	IC283	F7	RB59	C12
E2	C6	IC51	D10	IC158	L4	IC284	E7	RB60	C13
E3	C11	IC52	*C13	IC159	L8	IC285	J17	RB61	C13
E4	C14	IC53	*D12	IC160	L12	IC286	E17	RB62	C14
E5	C18	IC54	*B12	IC161	L16	IC287	F17	RB63	C14
E6	D2	IC55	*C8	IC162	L14	IC288	F19	RB64	C15
E7	D13	IC56	C9	IC163	L6	IC289	J19	RB65	C15
E8	D8	IC57	C16	IC164	L10	IC290	L18	RB66	C18
E9	D15	IC58	*D16	IC166	P11	IC291	J17	RB67	C18
E10	E4	IC59	*C2	IC200	*F11	IC292	J18	RB68	C6


HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher


VSW-33 -A SIDE-
SUFFIX: -12

RB69	C7	RB161	H11	RB253	L13	RB345	*C12	RB437	*H16
RB70	C12	RB162	H15	RB254	L15	RB346	*C13	RB438	*H16
RB71	C13	RB163	H17	RB255	L17	RB347	*C14	RB439	*H16
RB72	C14	RB164	H11	RB256	L11	RB348	*C15	RB440	*H17
RB73	C15	RB165	H15	RB257	L15	RB349	*C18	RB441	*J3
RB74	C16	RB166	H18	RB258	M3	RB350	*C3	RB442	*J5
RB75	C19	RB167	H18	RB259	M4	RB351	*C4	RB443	*J7
RB76	C2	RB168	H3	RB260	M4	RB352	*C5	RB444	*J9
RB77	C3	RB169	H4	RB261	M4	RB353	*C8	RB445	*J11
RB78	C4	RB170	H4	RB262	M8	RB354	*C9	RB446	*J13
RB79	C7	RB171	H4	RB263	M8	RB355	*C10	RB447	*J15
RB80	C8	RB172	H8	RB264	M8	RB356	*C11	RB448	*J17
RB81	C9	RB173	H8	RB265	M9	RB357	*D2	RB449	*J5
RB82	C10	RB174	H8	RB266	M12	RB358	*D2	RB450	*J9
RB83	C16	RB175	H9	RB267	M12	RB359	*D3	RB451	*J13
RB84	C17	RB176	H12	RB268	M12	RB360	*D3	RB452	*J3
RB85	D2	RB177	H12	RB269	M13	RB361	*D4	RB453	*J5
RB86	D2	RB178	H12	RB270	M15	RB362	*D4	RB454	*K7
RB87	D3	RB179	H13	RB271	M16	RB363	*D7	RB455	*K9
RB88	D3	RB180	H14	RB272	M16	RB364	*D7	RB456	*K11
RB89	D4	RB181	H16	RB273	M16	RB365	*D8	RB457	*K13
RB90	D4	RB182	H16	RB274	M17	RB366	*D8	RB458	*K13
RB91	D7	RB183	H16	RB275	*A5	RB367	*D9	RB459	*K15
RB92	D7	RB184	H17	RB276	*A5	RB368	*D9	RB460	*K17
RB93	D8	RB185	H13	RB277	*A6	RB369	*D10	RB461	*K5
RB94	D8	RB186	H18	RB278	*A6	RB370	*D10	RB462	*K9
RB95	D9	RB187	H18	RB279	*A11	RB371	*D16	RB463	*K3
RB96	D9	RB188	H18	RB280	*A11	RB372	*D16	RB464	*K4
RB97	D10	RB189	H18	RB281	*A12	RB373	*D17	RB465	*K4
RB98	D10	RB190	J17	RB282	*A12	RB374	*D17	RB466	*K4
RB99	D16	RB191	J18	RB283	*A13	RB375	*D17	RB467	*K8
RB100	D16	RB192	J18	RB284	*A13	RB376	*D18	RB468	*K8
RB101	D17	RB193	J3	RB285	*A14	RB377	*D5	RB469	*K8
RB102	D17	RB194	J5	RB286	*A14	RB378	*D5	RB470	*K9
RB103	D5	RB195	J7	RB287	*A15	RB379	*D12	RB471	*K12
RB104	D5	RB196	J7	RB288	*A15	RB380	*D12	RB472	*K12
RB105	D11	RB197	J9	RB289	*A18	RB381	*D18	RB473	*K12
RB106	D11	RB198	J11	RB290	*A18	RB382	*D18	RB474	*K13
RB107	D12	RB199	J13	RB291	*B5	RB383	*D5	RB475	*K14
RB108	D12	RB200	J15	RB292	*B6	RB384	*D12	RB476	*K16
RB109	D18	RB201	J17	RB293	*B11	RB385	*D18	RB477	*K16
RB110	D18	RB202	J11	RB294	*B12	RB386	*D3	RB478	*K16
RB111	D6	RB203	J15	RB295	*B13	RB387	*D7	RB479	*K17
RB112	D12	RB204	J18	RB296	*B14	RB388	*D9		
RB113	D13	RB205	J18	RB297	*B15	RB389	*D17	TP1	F18
RB114	D19	RB206	J3	RB298	*B18	RB390	*E2	TP2	F10
RB115	D2	RB207	J5	RB299	*B3	RB391	*E2	TP3	F18
RB116	D6	RB208	K7	RB300	*B4	RB392	*E6	TP4	G18
RB117	D8	RB209	K7	RB301	*B5	RB393	*E6	TP5	N9
RB118	D16	RB210	K9	RB302	*B8	RB394	*E8	TP6	P9
RB119	E2	RB211	K11	RB303	*B9	RB395	*E8		
RB120	E2	RB212	K13	RB304	*B10	RB396	*E16	*:B SIDE	
RB121	E6	RB213	K15	RB305	*B11	RB397	*E16		
RB122	E6	RB214	K17	RB306	*B17	RB398	*F11		
RB123	E8	RB215	K11	RB307	*B18	RB399	*F11		
RB124	E8	RB216	K15	RB308	*B2	RB400	*F11		
RB125	E16	RB217	K18	RB309	*B2	RB401	*F11		
RB126	E16	RB218	K18	RB310	*B3	RB402	*G3		
RB127	E19	RB219	K3	RB311	*B3	RB403	*G5		
RB128	E19	RB220	K4	RB312	*B4	RB404	*G7		
RB129	F19	RB221	K4	RB313	*B4	RB405	*G9		
RB130	F11	RB222	K4	RB314	*B7	RB406	*G11		
RB131	F14	RB223	K8	RB315	*B7	RB407	*G13		
RB132	F14	RB224	K8	RB316	*B8	RB408	*G15		
RB133	F15	RB225	K8	RB317	*B8	RB409	*G17		
RB134	F19	RB226	K9	RB318	*B9	RB410	*G5		
RB135	F11	RB227	K12	RB319	*B9	RB411	*H9		
RB136	F14	RB228	K12	RB320	*B10	RB412	*G13		
RB137	F14	RB229	K12	RB321	*B10	RB413	*H3		
RB138	F15	RB230	K13	RB322	*B16	RB414	*H5		
RB139	F11	RB231	K15	RB323	*B16	RB415	*H7		
RB140	F19	RB232	K16	RB324	*B17	RB416	*H9		
RB141	F14	RB233	K16	RB325	*B17	RB417	*H11		
RB142	G11	RB234	K16	RB326	*C5	RB418	*H13		
RB143	G3	RB235	K17	RB327	*C5	RB419	*H15		
RB144	G5	RB236	L3	RB328	*C6	RB420	*H17		
RB145	G7	RB237	L5	RB329	*C6	RB421	*H5		
RB146	G7	RB238	L7	RB330	*C11	RB422	*H9		
RB147	G9	RB239	L7	RB331	*C11	RB423	*H3		
RB148	G11	RB240	L9	RB332	*C12	RB424	*H4		
RB149	G13	RB241	L11	RB333	*C12	RB425	*H4		
RB150	G15	RB242	L13	RB334	*C13	RB426	*H4		
RB151	G17	RB243	L15	RB335	*C13	RB427	*H8		
RB152	H11	RB244	L17	RB336	*C14	RB428	*H8		
RB153	H15	RB245	L11	RB337	*C14	RB429	*H8		
RB154	H3	RB246	L15	RB338	*C15	RB430	*H9		
RB155	H5	RB247	L3	RB339	*C15	RB431	*H12		
RB156	H18	RB248	L5	RB340	*C18	RB432	*H12		
RB157	H18	RB249	L7	RB341	*C18	RB433	*H12		
RB158	H7	RB250	L7	RB342	*C5	RB434	*H13		
RB159	H7	RB251	L9	RB343	*C6	RB435	*H13		
RB160	H9	RB252	L11	RB344	*C11	RB436	*H14		

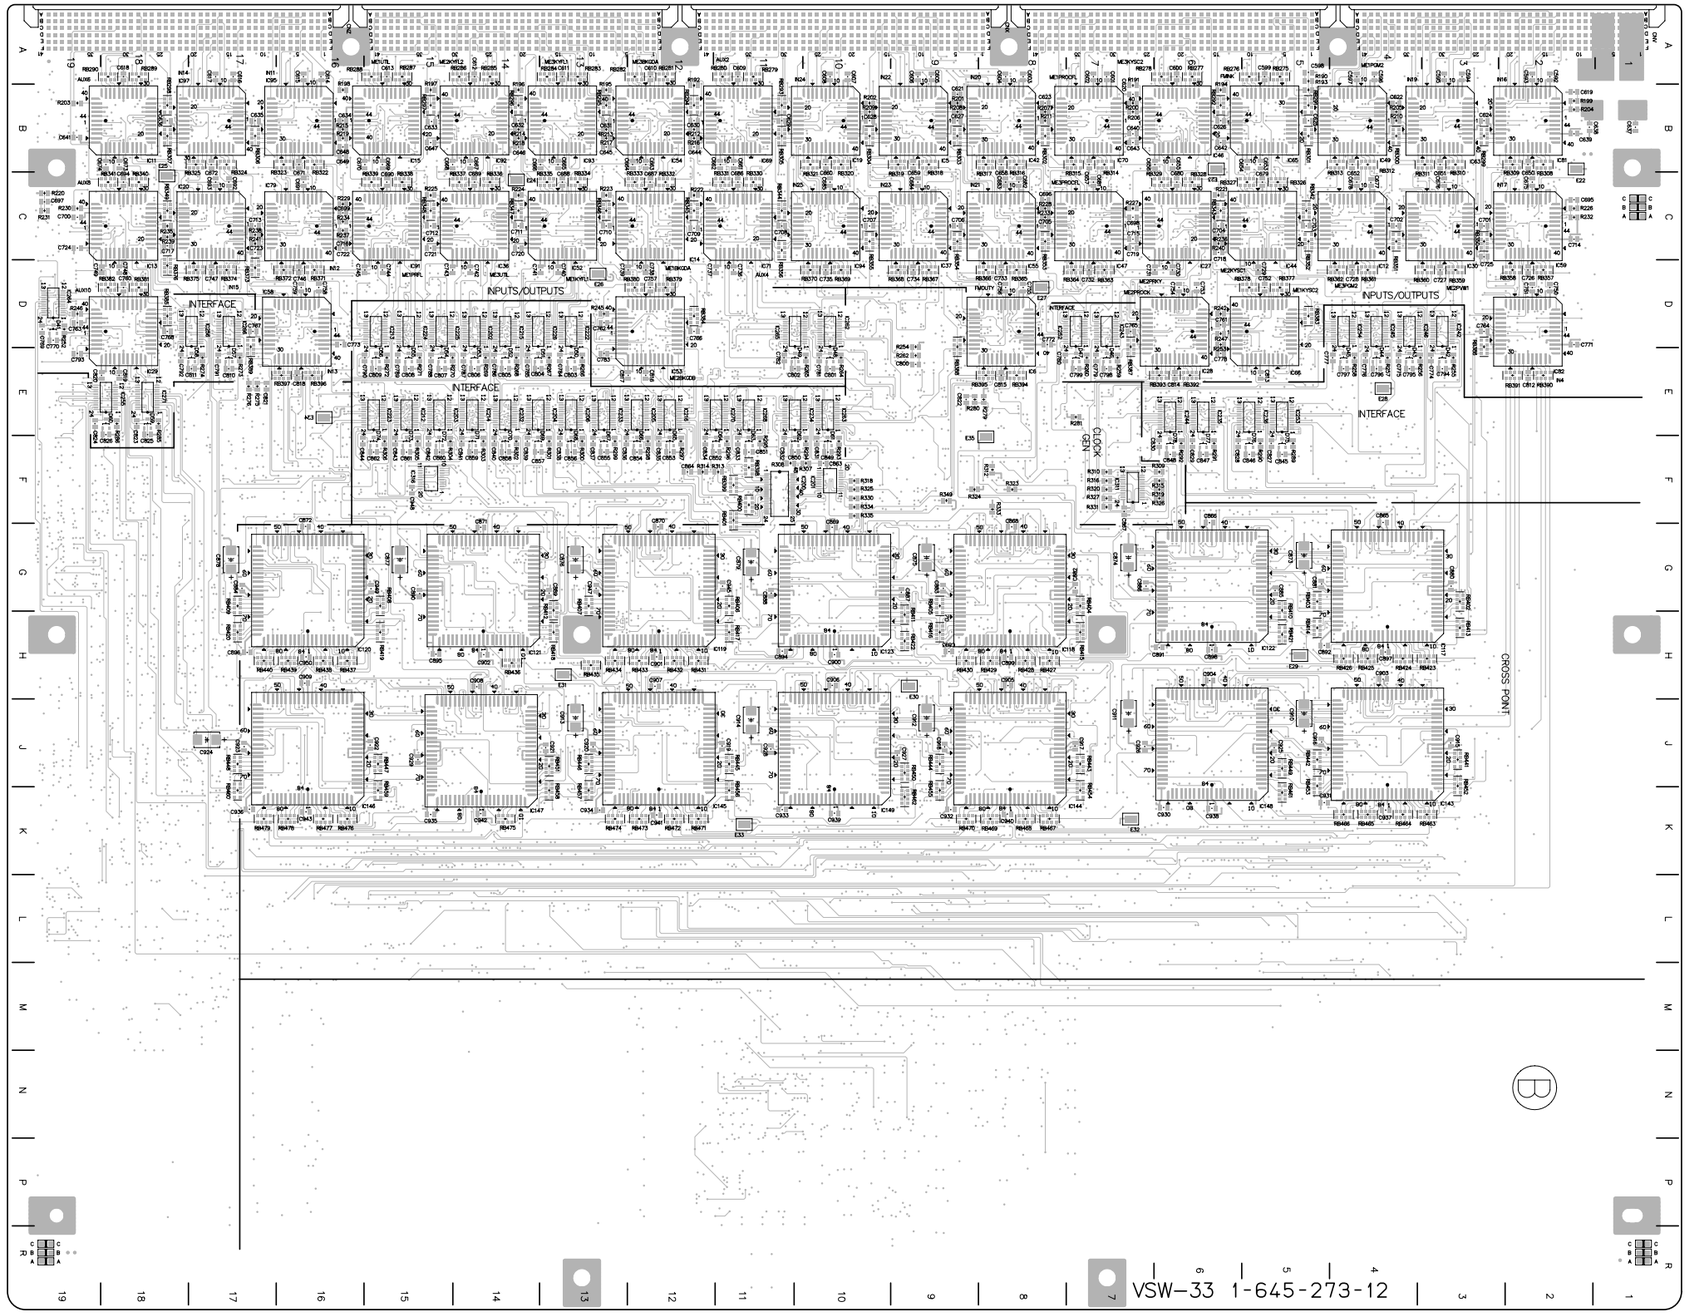

VSW-33 -B SIDE-
SUFFIX: -12

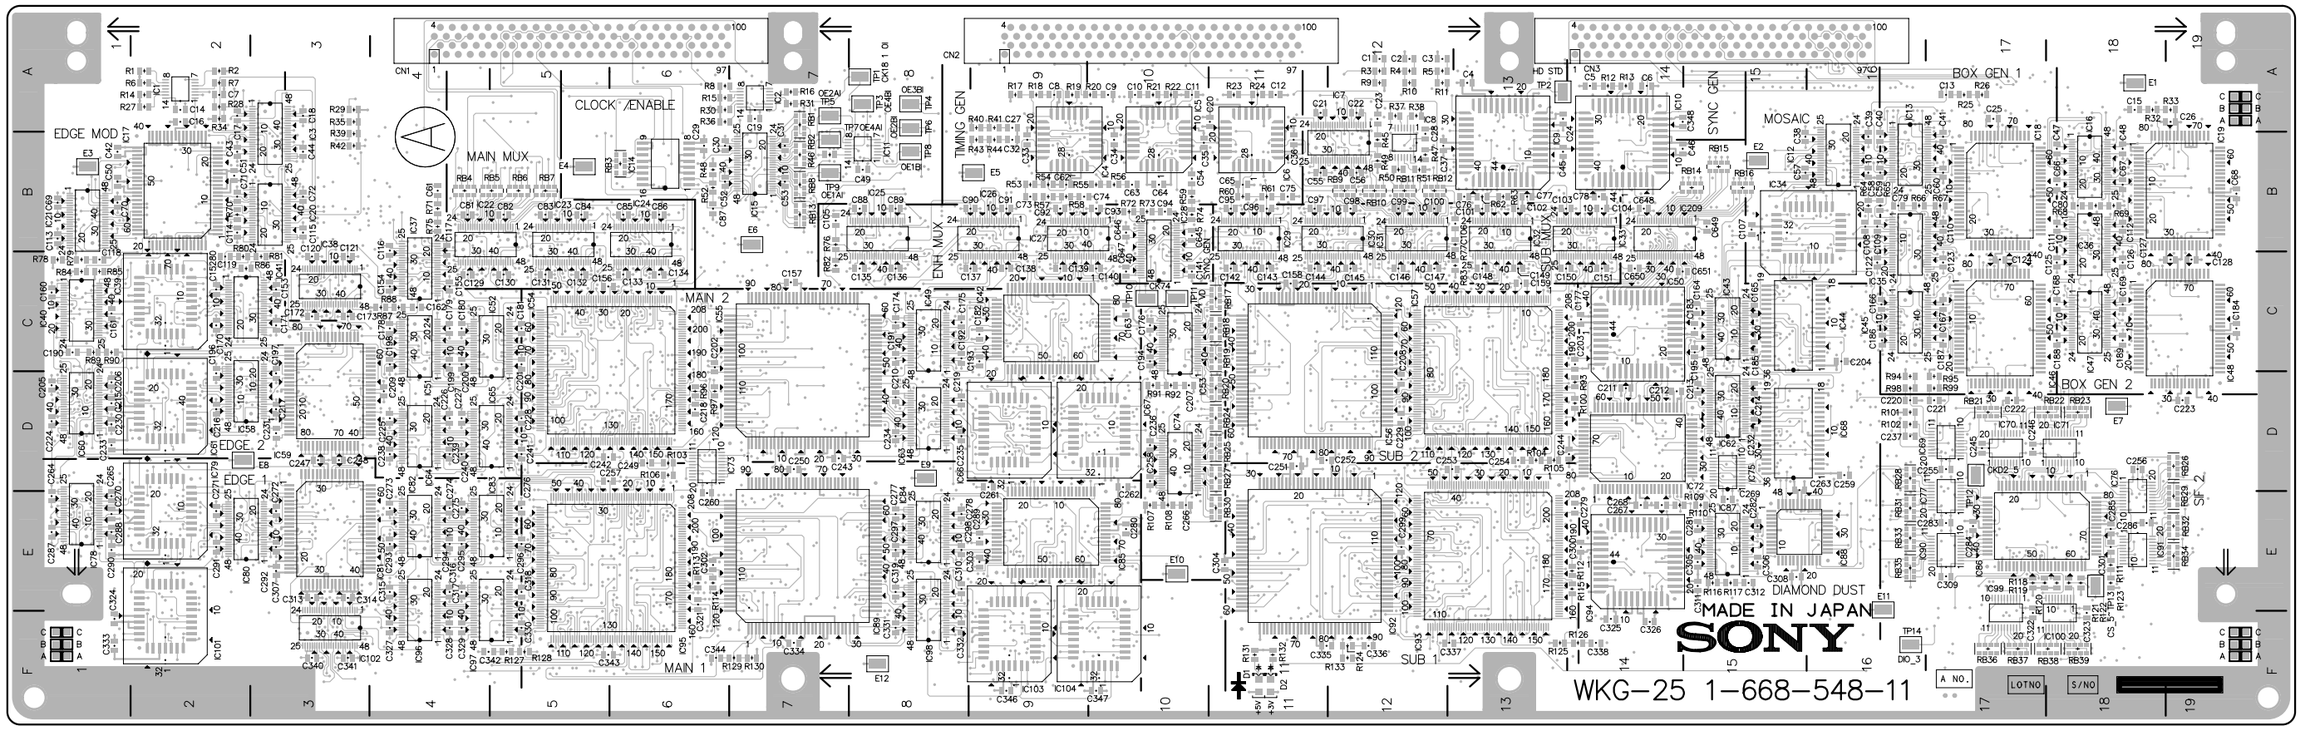
EDGE MOD
CLOCK ENABLE
MAIN MUX
TIMING GEN
ENH MUX
SYNC GEN
MOSAIC
BOX GEN 1
BOX GEN 2
MAIN 2
MAIN 1
SUB 2
SUB 1
EDGE 2
EDGE 1
SF 2
DIAMOND DUST
MADE IN JAPAN
SONY
WKG-25 1-668-548-11

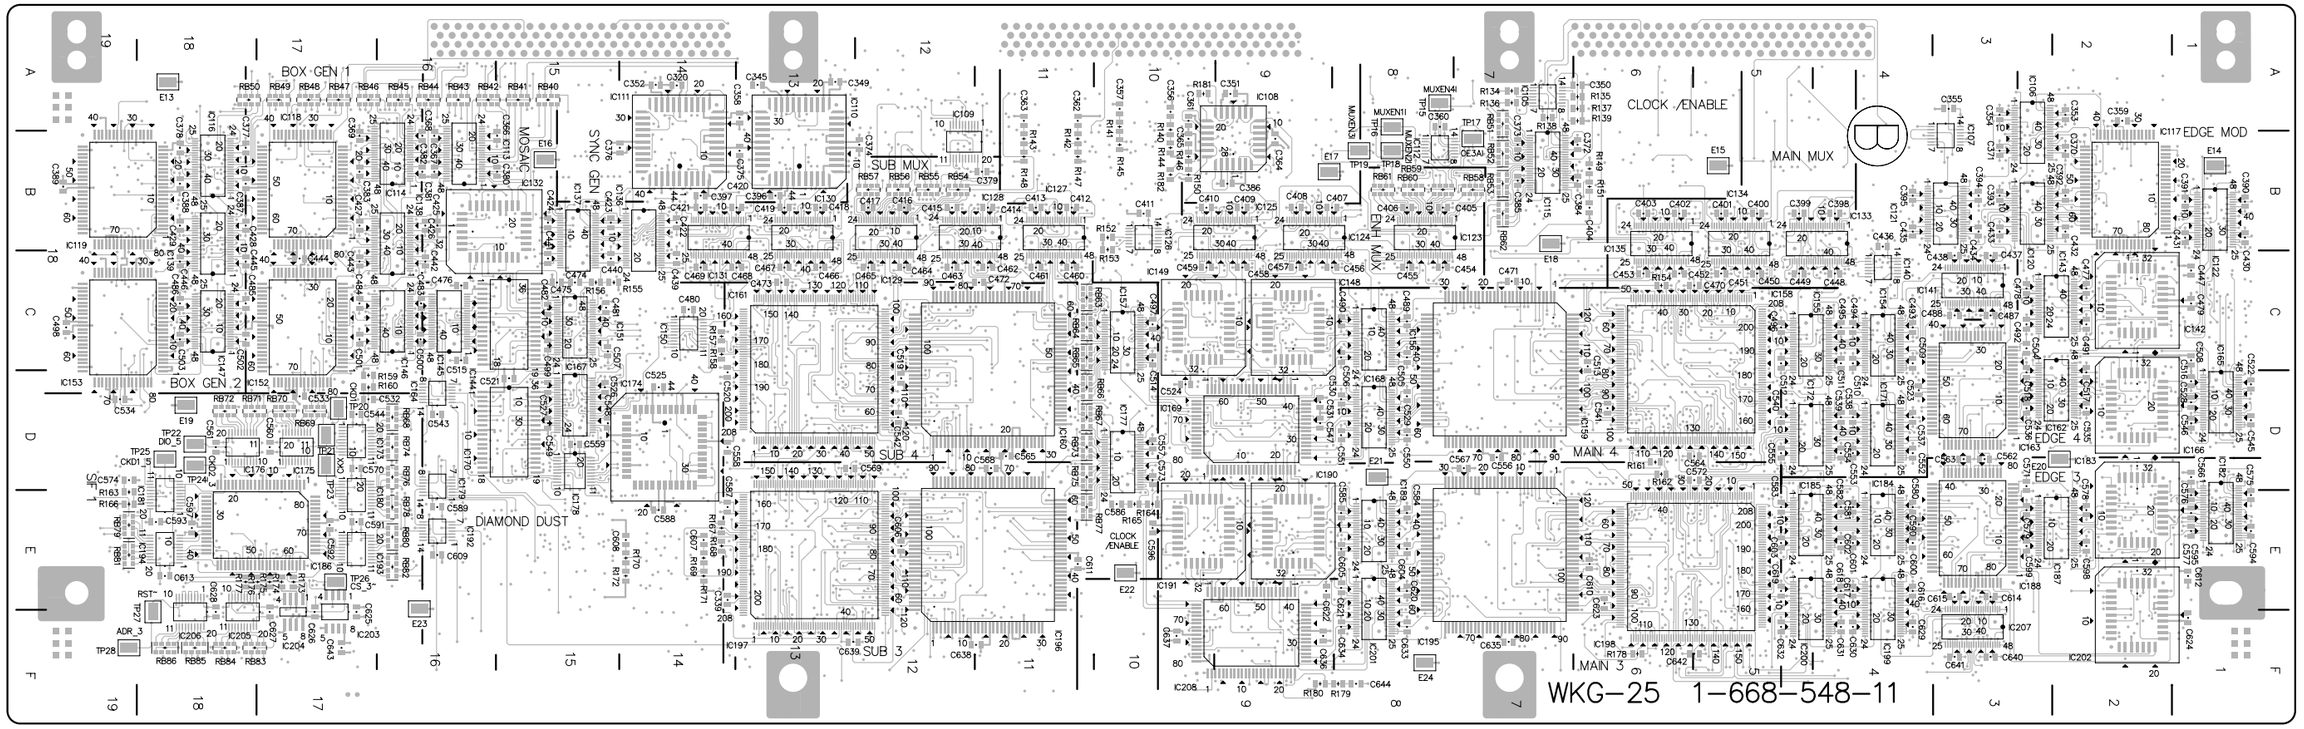


WKG-25 -B SIDE-
SUFFIX: -11

WKG-25 (1-668-548-11)

CN1	A4	IC3	B3	IC37	C4	IC71	D18	IC105	*A7	IC139	*B18	IC173	*D17	IC207	*F3	RB31	E16
CN2	A9	IC4	B9	IC38	C3	IC72	D14	IC106	*B3	IC140	*C4	IC174	*D14	IC208	*F9	RB32	E19
CN3	A14	IC5	B10	IC39	C2	IC73	D6	IC107	*B3	IC141	*C3	IC175	*D17	IC209	B14	RB33	E16
		IC6	B11	IC40	C1	IC74	D10	IC108	*B9	IC142	*C2	IC176	*D18			RB34	E19
D1	F11	IC7	B12	IC41	C2	IC75	D15	IC109	*A11	IC143	*C2	IC177	*D10	RB1	A7	RB35	E16
D2	F11	IC8	B12	IC42	C9	IC76	E18	IC110	*B13	IC144	*C16	IC178	*D15	RB2	B7	RB36	F17
		IC9	B13	IC43	C15	IC77	E17	IC111	*B14	IC145	*C16	IC179	*D16	RB3	B6	RB37	F17
E1	A18	IC10	B14	IC44	C16	IC78	E1	IC112	*B8	IC146	*C16	IC180	*E17	RB4	B4	RB38	F18
E2	B15	IC11	B8	IC45	C16	IC79	E2	IC113	*B16	IC147	*C18	IC181	*E18	RB5	B5	RB39	F18
E3	B1	IC12	B16	IC46	C17	IC80	E2	IC114	*B16	IC148	*C9	IC182	*E1	RB6	B5	RB40	*A15
E4	B5	IC13	B16	IC47	C18	IC81	E3	IC115	*B7	IC149	*C10	IC183	*E2	RB7	B5	RB41	*A15
E5	B9	IC14	B6	IC48	C19	IC82	E4	IC116	*B18	IC150	*C14	IC184	*E4	RB8	B7	RB42	*A16
E6	B7	IC15	B7	IC49	C8	IC83	E5	IC117	*B2	IC151	*C15	IC185	*E5	RB9	B12	RB43	*A16
E7	D18	IC16	B18	IC50	C14	IC84	E8	IC118	*B17	IC152	*C17	IC186	*E17	RB10	B12	RB44	*A16
E8	D2	IC17	B2	IC51	C4	IC85	E9	IC119	*B19	IC153	*C19	IC187	*E2	RB11	B12	RB45	*A16
E9	D8	IC18	B17	IC52	C5	IC86	E17	IC120	*B3	IC154	*C4	IC188	*E3	RB12	B12	RB46	*A17
E10	E10	IC19	B19	IC53	C10	IC87	E15	IC121	*B3	IC155	*C5	IC189	*E8	RB13	B7	RB47	*A17
E11	E16	IC20	B3	IC54	C6	IC88	E15	IC122	*B1	IC156	*C8	IC190	*E9	RB14	B15	RB48	*A17
E12	F8	IC21	B1	IC55	C7	IC89	E7	IC123	*B8	IC157	*C10	IC191	*E10	RB15	B15	RB49	*A17
E13	*A18	IC22	B4	IC56	C11	IC90	E17	IC124	*B9	IC158	*C6	IC192	*E16	RB16	B15	RB50	*A18
E14	*B1	IC23	B5	IC57	C13	IC91	E18	IC125	*B9	IC159	*C7	IC193	*E17	RB17	C11	RB51	*A7
E15	*B5	IC24	B6	IC58	D2	IC92	E11	IC126	*B10	IC160	*C11	IC194	*E18	RB18	C11	RB52	*B7
E16	*B15	IC25	B8	IC59	D3	IC93	E13	IC127	*B11	IC161	*C13	IC195	*E7	RB19	C11	RB53	*B7
E17	*B9	IC26	B9	IC60	D1	IC94	E14	IC128	*B12	IC162	*D2	IC196	*E11	RB20	D11	RB54	*B12
E18	*B7	IC27	B9	IC61	D2	IC95	E6	IC129	*B12	IC163	*D3	IC197	*E13	RB21	D17	RB55	*B12
E19	*D18	IC28	B10	IC62	D15	IC96	E4	IC130	*B13	IC164	*D16	IC198	*E6	RB22	D18	RB56	*B12
E20	*D2	IC29	B11	IC63	D8	IC97	E5	IC131	*B14	IC165	*D1	IC199	*E4	RB23	D18	RB57	*B12
E21	*D8	IC30	B12	IC64	D4	IC98	E8	IC132	*B16	IC166	*D2	IC200	*E5	RB24	D11	RB58	*B7
E22	*E10	IC31	B12	IC65	D5	IC99	F17	IC133	*B4	IC167	*D15	IC201	*E8	RB25	D11	RB59	*B8
E23	*E16	IC32	B13	IC66	D9	IC100	F18	IC134	*B5	IC168	*D8	IC202	*F2	RB26	D19	RB60	*B8
E24	*F8	IC33	B14	IC67	D10	IC101	F2	IC135	*B6	IC169	*D9	IC203	*F17	RB27	D11	RB61	*B8
		IC34	B16	IC68	D16	IC102	F3	IC136	*B14	IC170	*D16	IC204	*F17	RB28	D16	RB62	*B7
IC1	A2	IC35	B16	IC69	D17	IC103	F9	IC137	*B15	IC171	*D4	IC205	*F18	RB29	E19	RB63	*C11
IC2	A7	IC36	B18	IC70	D17	IC104	F10	IC138	*B16	IC172	*D5	IC206	*F18	RB30	E11	RB64	*C11


RB65	*C11	TP12	D17
RB66	*D11	TP13	E18
RB67	*D11	TP14	F16
RB68	*D16	TP15	*A8
RB69	*D17	TP16	*A8
RB70	*D17	TP17	*B7
RB71	*D18	TP18	*B8
RB72	*D18	TP19	*B8
RB73	*D11	TP20	*D17
RB74	*D16	TP21	*D17
RB75	*D11	TP22	*D18
RB76	*D16	TP23	*D17
RB77	*E11	TP24	*D18
RB78	*E16	TP25	*D18
RB79	*E19	TP26	*E17
RB80	*E16	TP27	*F18
RB81	*E19	TP28	*F19
RB82	*E16		
RB83	*F18	*:B SIDE	
RB84	*F18		
RB85	*F18		
RB86	*F18		

TP1	A8
TP2	A13
TP3	A8
TP4	A8
TP5	A7
TP6	A8
TP7	B7
TP8	B8
TP9	B7
TP10	C10
TP11	C10

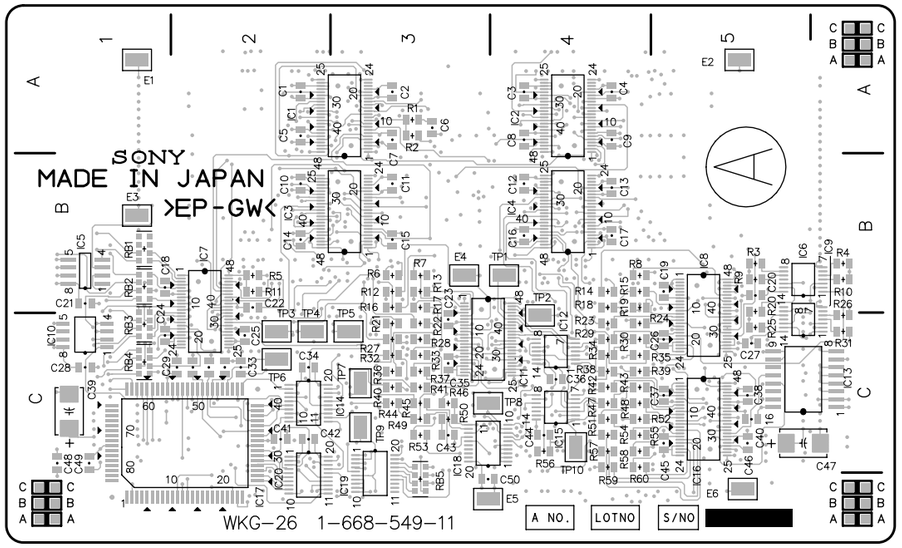

HDS-7000 (J) : S/N 10001 and Higher
HDS-7000 (UCJ) : S/N 11001 and Higher
HDS-7000 (SY) : S/N 12001 and Higher


WKG-26 -A SIDE-
SUFFIX: -11

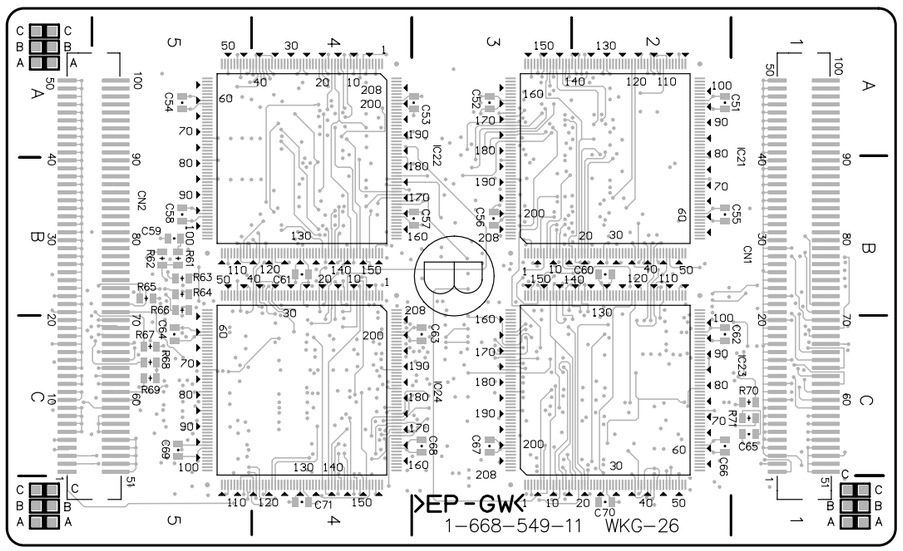


WKG-26 -B SIDE-
SUFFIX: -11

WKG-26 (1-668-549-11)

CN1	*B1	RB2	B1
CN2	*B5	RB3	C1
		RB4	C1
E1	A1	RB5	C3
E2	A5		
E3	B1	TP1	B4
E4	B3	TP2	C4
E5	C3	TP3	C2
E6	C5	TP4	C2
		TP5	C3
IC1	A3	TP6	C2
IC2	A4	TP7	C3
IC3	B3	TP8	C3
IC4	B4	TP9	C3
IC5	B1	TP10	C4
IC6	B5		
IC7	B2	*:B SIDE	
IC8	C5		
IC9	C5		
IC10	C1		
IC11	C3		
IC12	C4		
IC13	C5		
IC14	C2		
IC15	C4		
IC16	C5		
IC17	C2		
IC18	C3		
IC19	C3		
IC20	C2		
IC21	*B2		
IC22	*B4		
IC23	*C2		
IC24	*C4		

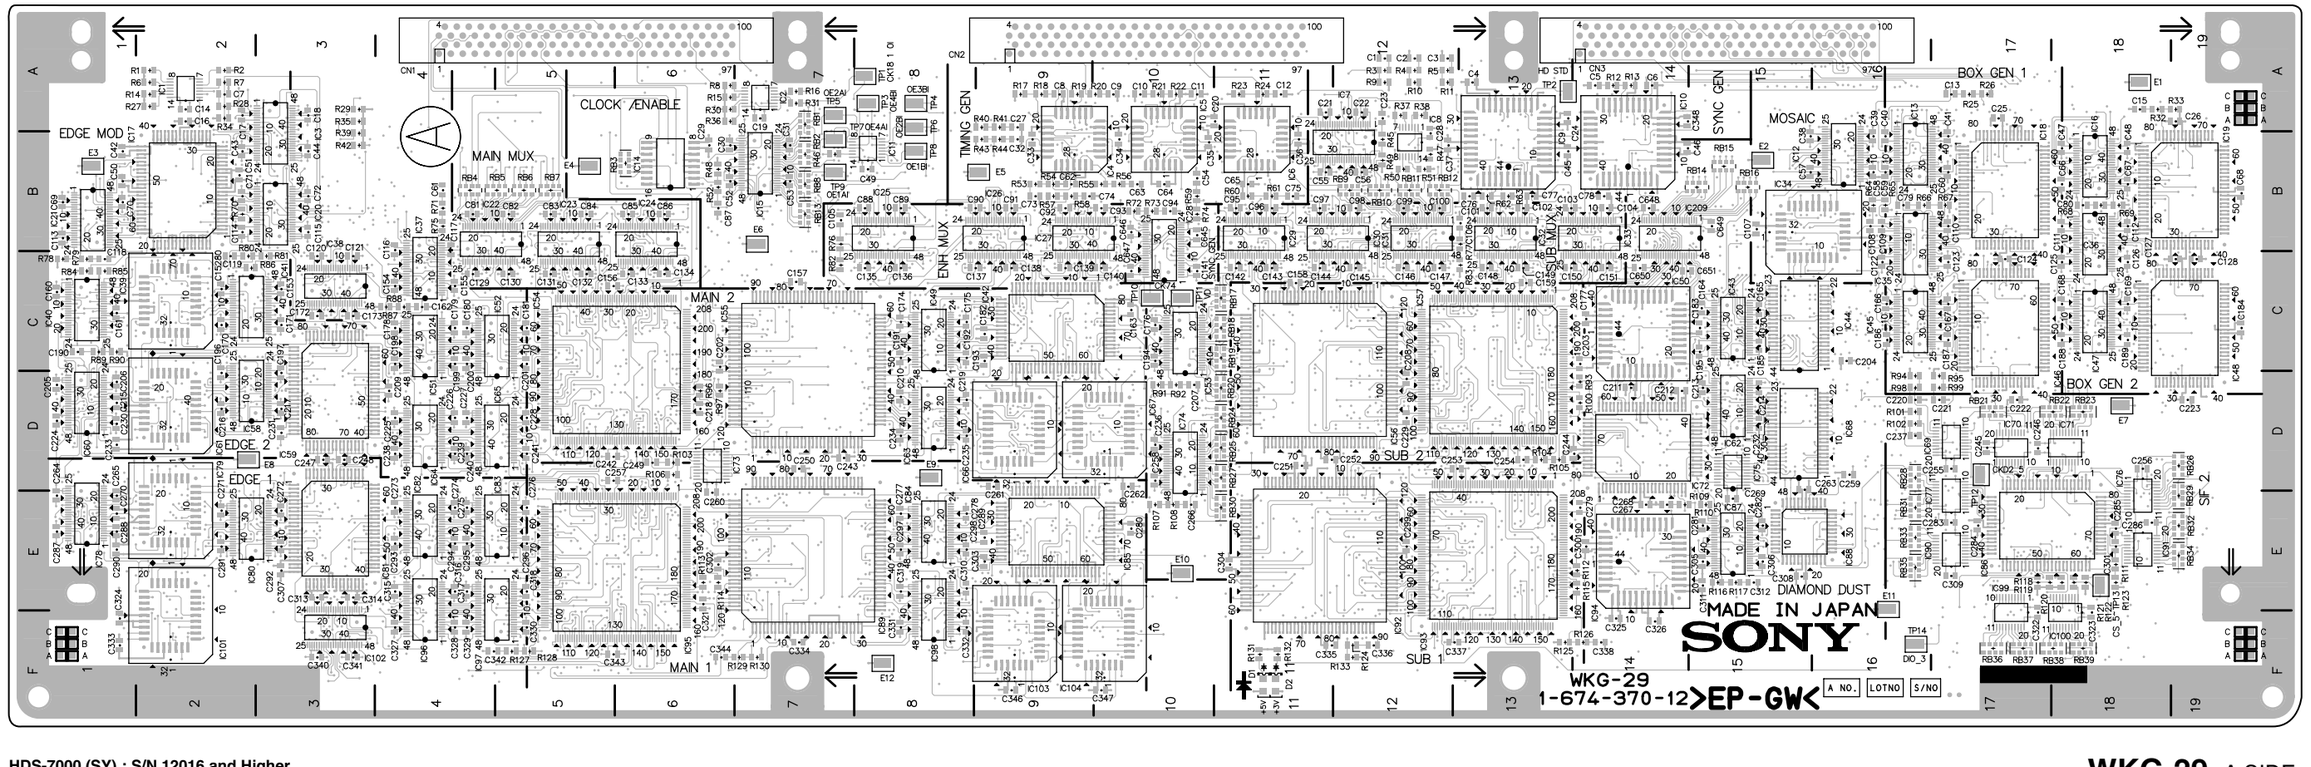
EDGE MOD
CLOCK /ENABLE
MAIN MUX
TIMING GEN
ENH MUX
SUB MUX
SYNC GEN
MOSAIC
BOX GEN 1
BOX GEN 2
DIF 2
MAIN 2
MAIN 1
SUB 2
SUB 1
EDGE 2
EDGE
DIAMOND DUST
MADE IN JAPAN
SONY
WKG-29
1-674-370-12 >EP-GW<

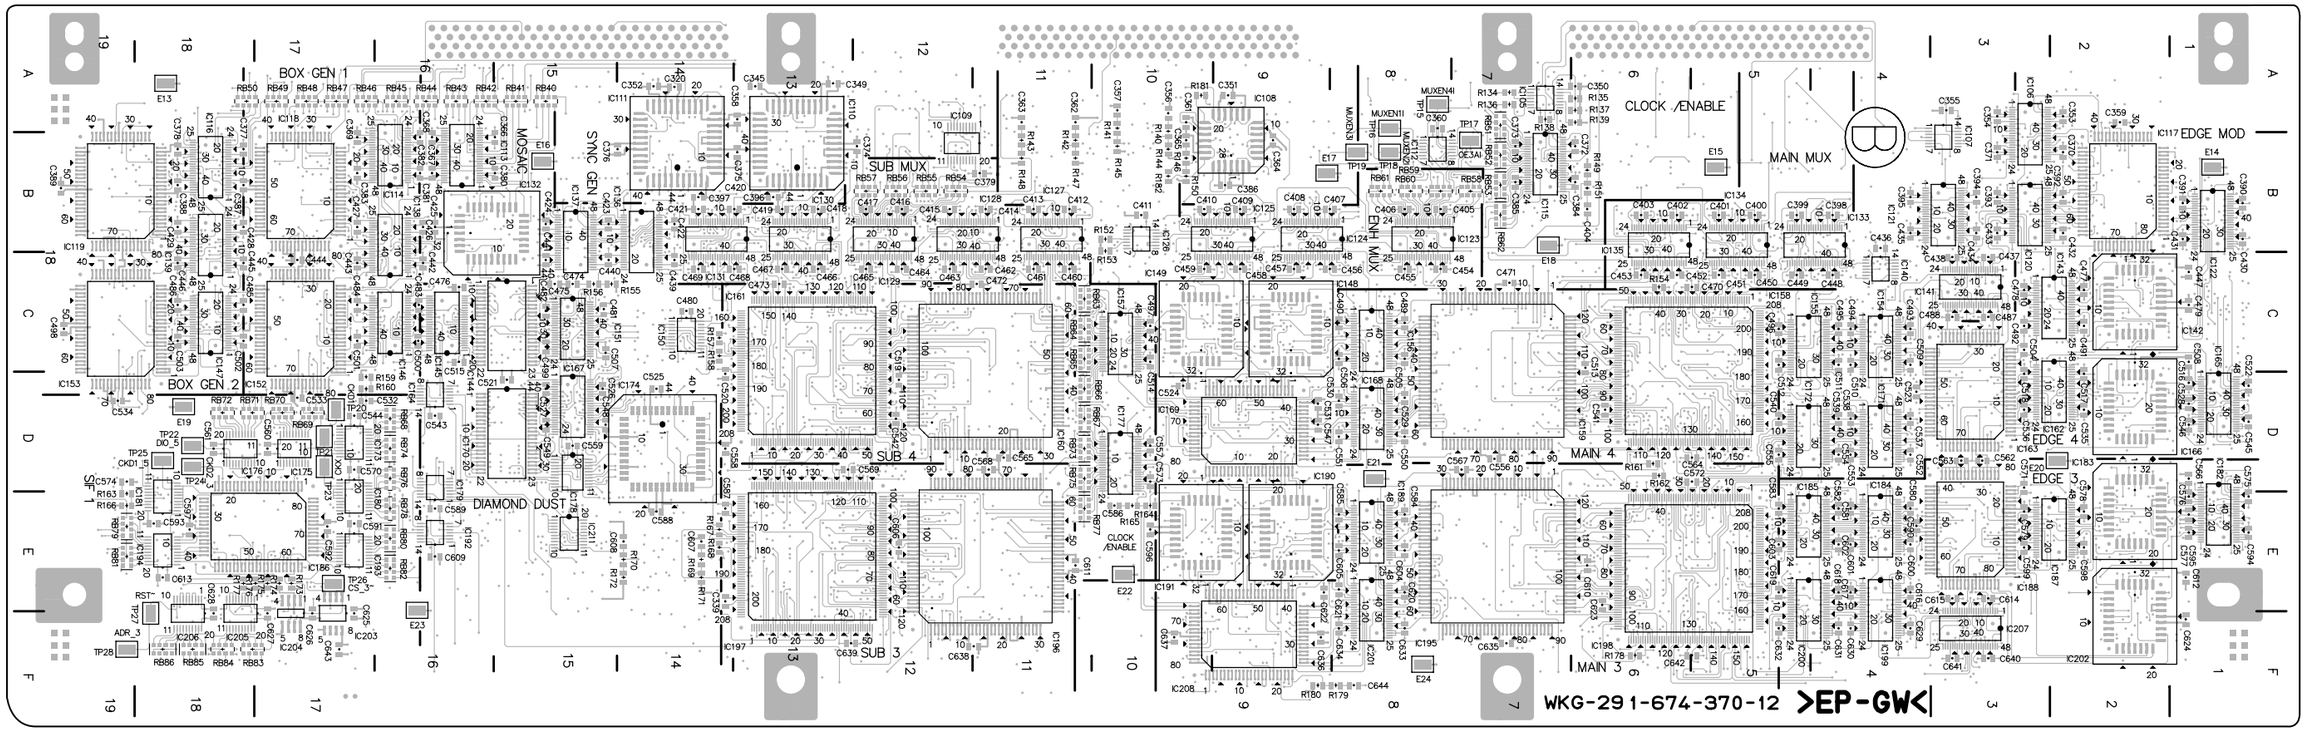

WKG-29 (1-674-370-12)

CN1	A4	IC3	B3	IC37	C4	IC71	D18	IC105	*A7	IC139	*B18	IC173	*D17	IC207	*F3	RB30	E11	RB64	*C11	TP11	C10
CN2	A9	IC4	B9	IC38	C3	IC72	D14	IC106	*B3	IC140	*C4	IC174	*D14	IC208	*F9	RB31	E16	RB65	*C11	TP12	D17
CN3	A14	IC5	B10	IC39	C2	IC73	D6	IC107	*B3	IC141	*C3	IC175	*D17	IC209	B14	RB32	E19	RB66	*D11	TP13	E18
		IC6	B11	IC40	C1	IC74	D10	IC108	*B9	IC142	*C2	IC176	*D18	IC211	*E15	RB33	E16	RB67	*D11	TP14	F16
D1	F11	IC7	B12	IC41	C2	IC75	D15	IC109	*A11	IC143	*C2	IC177	*D10			RB34	E19	RB68	*D16	TP15	*A8
D2	F11	IC8	B12	IC42	C9	IC76	E18	IC110	*B13	IC144	*C16	IC178	*D15	RB1	A7	RB35	E16	RB69	*D17	TP16	*A8
		IC9	B13	IC43	C15	IC77	E17	IC111	*B14	IC145	*C16	IC179	*D16	RB2	B7	RB36	F17	RB70	*D17	TP17	*B7
E1	A18	IC10	B14	IC44	C16	IC78	E1	IC112	*B8	IC146	*C16	IC180	*E17	RB3	B6	RB37	F17	RB71	*D18	TP18	*B8
E2	B15	IC11	B8	IC45	C16	IC79	E2	IC113	*B16	IC147	*C18	IC181	*E18	RB4	B4	RB38	F18	RB72	*D18	TP19	*B8
E3	B1	IC12	B16	IC46	C17	IC80	E2	IC114	*B16	IC148	*C9	IC182	*E1	RB5	B5	RB39	F18	RB73	*D11	TP20	*D17
E4	B5	IC13	B16	IC47	C18	IC81	E3	IC115	*B7	IC149	*C10	IC183	*E2	RB6	B5	RB40	*A15	RB74	*D16	TP21	*D17
E5	B9	IC14	B6	IC48	C19	IC82	E4	IC116	*B18	IC150	*C14	IC184	*E4	RB7	B5	RB41	*A15	RB75	*D11	TP22	*D18
E6	B7	IC15	B7	IC49	C8	IC83	E5	IC117	*B2	IC151	*C15	IC185	*E5	RB8	B7	RB42	*A16	RB76	*D16	TP23	*D17
E7	D18	IC16	B18	IC50	C14	IC84	E8	IC118	*B17	IC152	*C17	IC186	*E17	RB9	B12	RB43	*A16	RB77	*E11	TP24	*D18
E8	D2	IC17	B2	IC51	C4	IC85	E9	IC119	*B19	IC153	*C19	IC187	*E2	RB10	B12	RB44	*A16	RB78	*E16	TP25	*D18
E9	D8	IC18	B17	IC52	C5	IC86	E17	IC120	*B3	IC154	*C4	IC188	*E3	RB11	B12	RB45	*A16	RB79	*E19	TP26	*E17
E10	E10	IC19	B19	IC53	C10	IC87	E15	IC121	*B3	IC155	*C5	IC189	*E8	RB12	B12	RB46	*A17	RB80	*E16	TP27	*F18
E11	E16	IC20	B3	IC54	C6	IC88	E15	IC122	*B1	IC156	*C8	IC190	*E9	RB13	B7	RB47	*A17	RB81	*E19	TP28	*F19
E12	F8	IC21	B1	IC55	C7	IC89	E7	IC123	*B8	IC157	*C10	IC191	*E10	RB14	B15	RB48	*A17	RB82	*E16		
E13	*A18	IC22	B4	IC56	C11	IC90	E17	IC124	*B9	IC158	*C6	IC192	*E16	RB15	B15	RB49	*A17	RB83	*F18	*:B SIDE	
E14	*B1	IC23	B5	IC57	C13	IC91	E18	IC125	*B9	IC159	*C7	IC193	*E17	RB16	B15	RB50	*A18	RB84	*F18		
E15	*B5	IC24	B6	IC58	D2	IC92	E11	IC126	*B10	IC160	*C11	IC194	*E18	RB17	C11	RB51	*A7	RB85	*F18		
E16	*B15	IC25	B8	IC59	D3	IC93	E13	IC127	*B11	IC161	*C13	IC195	*E7	RB18	C11	RB52	*B7	RB86	*F18		
E17	*B9	IC26	B9	IC60	D1	IC94	E14	IC128	*B12	IC162	*D2	IC196	*E11	RB19	C11	RB53	*B7				
E18	*B7	IC27	B9	IC61	D2	IC95	E6	IC129	*B12	IC163	*D3	IC197	*E13	RB20	D11	RB54	*B12	TP1	A8		
E19	*D18	IC28	B10	IC62	D15	IC96	E4	IC130	*B13	IC164	*D16	IC198	*E6	RB21	D17	RB55	*B12	TP2	A13		
E20	*D2	IC29	B11	IC63	D8	IC97	E5	IC131	*B14	IC165	*D1	IC199	*E4	RB22	D18	RB56	*B12	TP3	A8		
E21	*D8	IC30	B12	IC64	D4	IC98	E8	IC132	*B16	IC166	*D2	IC200	*E5	RB23	D18	RB57	*B12	TP4	A8		
E22	*E10	IC31	B12	IC65	D5	IC99	F17	IC133	*B4	IC167	*D15	IC201	*E8	RB24	D11	RB58	*B7	TP5	A7		
E23	*E16	IC32	B13	IC66	D9	IC100	F18	IC134	*B5	IC168	*D8	IC202	*F2	RB25	D11	RB59	*B8	TP6	A8		
E24	*F8	IC33	B14	IC67	D10	IC101	F2	IC135	*B6	IC169	*D9	IC203	*F17	RB26	D19	RB60	*B8	TP7	B7		
		IC34	B16	IC68	D16	IC102	F3	IC136	*B14	IC170	*D16	IC204	*F17	RB27	D11	RB61	*B8	TP8	B8		
IC1	A2	IC35	B16	IC69	D17	IC103	F9	IC137	*B15	IC171	*D4	IC205	*F18	RB28	D16	RB62	*B7	TP9	B7		
IC2	A7	IC36	B18	IC70	D17	IC104	F10	IC138	*B16	IC172	*D5	IC206	*F18	RB29	E19	RB63	*C11	TP10	C10		

このマニュアルに記載されている事柄の著作権は当社にあります。
従って，当社の許可なしに無断で複写したり，説明内容(操作，保守等)と異なる目的で本マニュアルを使用することを禁止します。

The material contained in this manual consists of information that is the property of Sony Corporation.
Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

Le matériel contenu dans ce manuel consiste en informations qui sont la propriété de Sony Corporation.
Sony Corporation interdit formellement la copie de quelque partie que ce soit de ce manuel ou son emploi pour tout autre but que des opérations ou entretiens de l'équipement à moins d'une permission écrite de Sony Corporation.

Das in dieser Anleitung enthaltene Material besteht aus Informationen, die Eigentum der Sony Corporation sind.
Die Sony Corporation untersagt ausdrücklich die Vervielfältigung jeglicher Teile dieser Anleitung oder den Gebrauch derselben für irgendeinen anderen Zweck als die Bedienung oder Wartung der in dieser Anleitung beschriebenen Ausrüstung ohne ausdrückliche schriftliche Erlaubnis der Sony Corporation.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer :

Check the metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 3.5 mA. Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 5.25 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 20 V AC range are suitable. (See Fig. A)

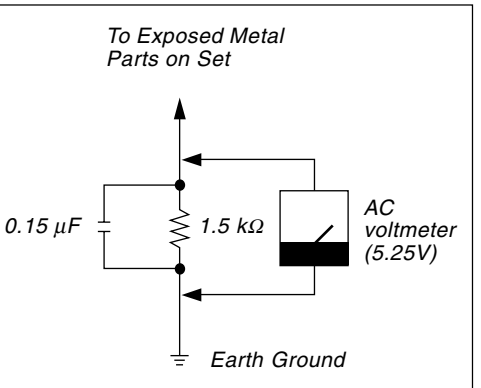


Fig A. Using an AC voltmeter to check AC leakage.

HDS-7000 (J, UCJ, SY) J, E
9-968-528-03

Sony Corporation
B&P Company

Printed in Japan
2002. 5 16
©1998