SONY

SWITCHER PROCESSOR PACK

MVS-6000-C

MULTI FORMAT SWITCHER PROCESSOR

MVS-6000

HK-PSU04

MKS-6470

MKS-8110G

MKS-8161M

MKS-8442G

MKS-8450G

MAINTENANCE MANUAL

1st Edition

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠ WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

MVS-6000 (SY)	Serial No. 10001 and Higher
HK-PSU04 (SY)	Serial No. 10001 and Higher
MKS-6470 (SY)	Serial No. 10001 and Higher
MKS-8110G (SY)	Serial No. 10001 and Higher
MKS-8442G (SY)	Serial No. 10001 and Higher
MKS-8450G (SY)	Serial No. 10001 and Higher
MKS-8161M (SY)	Serial No. 10001 and Higher

Attention-when the product is installed in Rack:

1. **Prevention against overloading of branch circuit**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please make sure that the rack does not overload the supply circuit.

2. **Providing protective earth**
   When this product is installed in a rack and is supplied power from an outlet on the rack, please confirm that the outlet is provided with a suitable protective earth connection.

3. **Internal air ambient temperature of the rack**
   When this product is installed in a rack, please make sure that the internal air ambient temperature of the rack is within the specified limit of this product.

4. **Prevention against achieving hazardous condition due to uneven mechanical loading**
   When this product is installed in a rack, please make sure that the rack does not achieve hazardous condition due to uneven mechanical loading.

5. **Install the equipment while taking the operating temperature of the equipment into consideration**
   For the operating temperature of the equipment, refer to the specifications of the Operation Manual.

6. **When performing the installation, keep the following space away from walls in order to obtain proper exhaust and radiation of heat.**
   Front, Right and Left : 10 cm (4 inches) or more

- For safety, do not connect the connector for peripheral device wiring that might have excessive voltage to the following port(s).
  : DATA connector
  : CTRL connector
  : FM DATA connector
  : DME DATA connector
  : DME CTRL connector
  Follow the instructions for the above port(s).
- When you connect the DATA, CTRL, FM DATA, DME DATA, and DME CTRL connectors of the unit to peripheral device, use a shielded-type cable to prevent malfunction due to radiation noise.

- 安全のために，周辺機器を接続する際は，過大電圧を持つ可能性があるコネクターを以下のポートに接続しないでください。
  : DATAコネクター
  : CTRLコネクター
  : FM DATAコネクター
  : DME DATAコネクター
  : DME CTRLコネクター
  上記のポートについては本書の指示に従ってください。
- DATA, CTRL, FM DATA, DME DATAおよびDME CTRLコネクターを使用の際は，輻射ノイズによる誤動作を防ぐため，シールドタイプのケーブルを使用してください。

Table of Contents

Manual Structure

Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)

1. Service Overview

1-1. Location of Main Parts ..... 1-1 (E)
1-2. Replacement of Main Parts ..... 1-3 (E)
1-2-1. Front Panel Removal ..... 1-3 (E)
1-2-2. Power Supply Unit Replacement ..... 1-3 (E)
1-2-3. Fan Replacement ..... 1-4 (E)
1-2-4. Fuse and IC Link Replacement ..... 1-6 (E)
1-3. Fixtures ..... 1-7 (E)
1-4. PLD Data Writing/Rewriting ..... 1-7 (E)
1-5. Periodic Replacement Parts ..... 1-8 (E)
1-6. How to Extend the Plug-in Board ..... 1-9 (E)
1-7. Unleaded Solder ..... 1-10 (E)
1-8. Circuit Description ..... 1-11 (E)
1-9. Maintenance Menu ..... 1-16 (E)
1-9-1. Calling the Maintenance Menu ..... 1-16 (E)
1-9-2. Maintenance Main Menu ..... 1-17 (E)
1-9-3. Maintenance Latest Error Menu ..... 1-19 (E)
1-9-4. Maintenance Circuit Board Menu ..... 1-20 (E)
1-9-5. Maintenance PSU Menu ..... 1-22 (E)
1-9-6. Maintenance Fan Menu ..... 1-24 (E)
1-9-7. Error Indication and Action ..... 1-25 (E)

2. Spare Parts

2-1. Notes on Repair Parts 2-1
2-2. Exploded Views 2-2
2-3. Electrical Parts List 2-15
2-4. Supplied Accessories List 2-224

3. Block Diagrams

Overall 3-2
CA-54C 3-3
CA-54CFE 3-4
CNI-32 3-5
CNI-35 3-5
CNO-24 3-6
CNO-35 3-6
CNO-36 3-7
DIF-184 3-7
DVP-49 3-8
FC-109 3-10
MIX-52 3-11
MY-114 3-12
OUT-33 3-13
SG-272 3-14
SIO-26 3-14
XPT-29 3-15

4. Schematic Diagrams

CA-54C 4-2
CA-54CFE 4-30
CN-3141 4-58
CN-3147 4-59
CNI-32 4-60
CNI-35 4-63
CNO-24 4-66
CNO-35 4-70
CNO-36 4-72
DIF-184 4-74
DVP-49 4-77
FC-109 4-108
HN-305A 4-142
IF-937 4-143
MB-1133 4-144
MIX-52 4-153
MY-114 4-193
OUT-33 4-238
SG-272 4-273
SIO-26 4-276
XPT-29 4-281
Frame Wiring 4-304

5. Board Layouts

CA-54 5-3
CN-3141 5-6
CN-3147 5-8
CNI-32 5-10
CNI-35 5-12
CNO-24 5-14
CNO-35 5-16
CNO-36 5-18
DIF-184 5-21
DVP-49 5-22
FC-109 5-26
SUFFIX: -11 5-26
SUFFIX: -12 ..... 5-26 (a)
HN-305 5-31
IF-937 5-31
MB-1133 5-32
MIX-52 5-34
MY-114 5-39
OUT-33 5-44
SG-272 5-48
SIO-26 5-49
XPT-29 5-50

Manual Structure

Purpose of this manual

This manual is the maintenance manual of Switcher Processor Pack MVS-6000-C and their optional boards and units.
This manual is intended for use by trained system and service engineers, and provides the information of maintenance and detailed service (parts replacement, exploded views, detailed parts list, schematic diagrams, and board layouts).

Related manuals

The following manuals are prepared for MVS-6000-C and their optional boards and units.


- **Operation Manual (Supplied with MVS-6000-C)**
  This manual describes the application and operation of MVS-6000-C.

- **Installation Manual (Supplied with MVS-6000-C)**
  This manual describes the information on installing the MVS-6000-C.


- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  Part number: 9-968-546-06

Section 1
Service Overview


1-1. Location of Main Parts

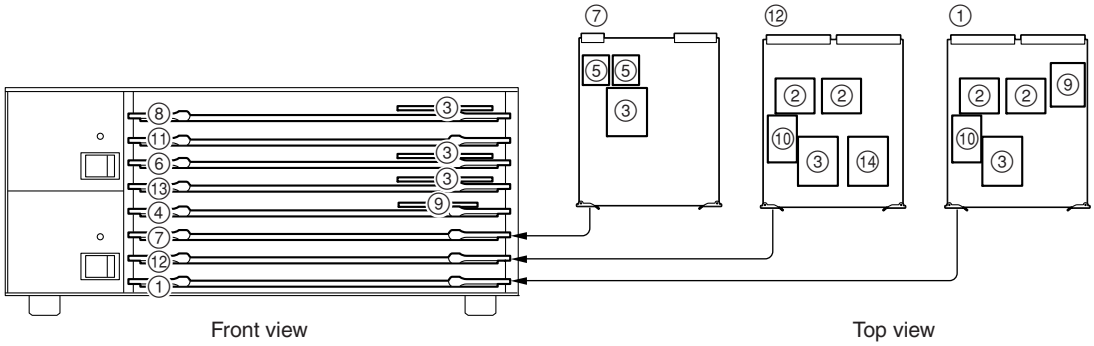

No.	Name	Function	Remarks
①	CA-54C Board	CPU Board	MVS-6000
②	CPU-DK Module	CPU-DK Module	On the CA-54CFE Board (Slot No. 7) On the CA-54C Board (Slot No. 8)
③	CPU-DT Module	CPU-DT Module	On the OUT-33 Board (Slot No. 1) On the MIX-52 Board (Slot No. 3) On the DVP-49 Board (Slot No. 4) On the MY-114 Board (Slot No. 6) On the CA-54CFE Board (Slot No. 7) On the CA-54C Board (Slot No. 8)
④	FC-109 Board	Format Converter Board	MKS-8450G
⑤	IF-937 Board	Interface Board	On the MY-114 Board (Slot No. 6)
⑥	MIX-52 Board	Mix/Effect Board	MVS-6000
⑦	MY-114 Board	Frame Memory Board	MKS-8442G
⑧	OUT-33 Board	Output Board	MVS-6000
⑨	SG-272 Board	Signal Generator Board	On the FC-109 Board (Slot No. 5) On the CA-54C Board (Slot No. 8)
⑩	SIO-26 Board	Serial Interface Board	On the CA-54CFE Board (Slot No. 7) On the CA-54C Board (Slot No. 8)
⑪	XPT-29 Board	Cross Point Board	MVS-6000
⑫	CA-54CFE Board	CPU Board	MKS-6470
⑬	DVP-49 Board	DME Board	MKS-6470
⑭	DIF-184 Board	Compact Flash Interface Board	MKS-6470

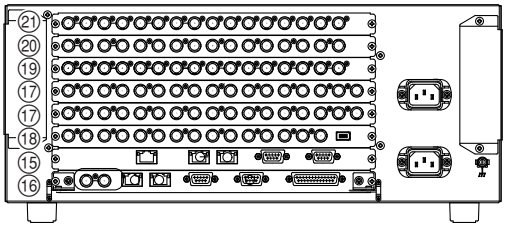

Rear view

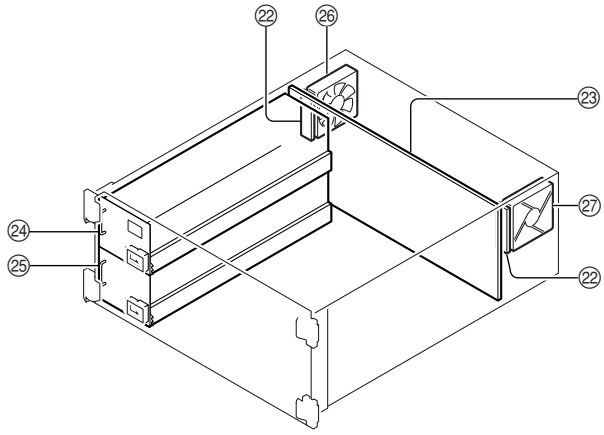

No.	Name	Function	Remarks
⑮	CN-3141 Board	Control Board	MVS-6000
⑯	CN-3147 Board	Control Board	MVS-6000
⑰	CNI-32 Board	17-Input Board	MKS-8110G
⑱	CNI-35 Board	15-Input Board	MVS-6000
⑲	CNO-24 Board	Monitor Output Board	MKS-8161M
⑳	CNO-35 Board	Output Board	MVS-6000
㉑	CNO-36 Board	Output Board	MVS-6000
㉒	HN-305A Board	Fan Connector Board	MVS-6000
㉓	MB-1133 Board	Mother Board	MVS-6000
㉔	Power Supply Unit A	–	MVS-6000
㉕	Power Supply Unit B	–	HK-PSU04
㉖	Fan R1	–	On both sides of rear
㉗	Fan L1	–	On both sides of rear


1-2. Replacement of Main Parts

1-2-1. Front Panel Removal

CAUTION


Be sure to set the POWER switch to OFF and unplug the power cord before starting any of the replacement work to protect inside of the machine from damage.
If the replacement work is attempted with the power ON, it may result in electric shock or damage of circuits.

1. Turn the power off, and then unplug the power cord.
2. Fully loosen the four screws (with drop-safe). Remove the front panel in the direction of the arrow.

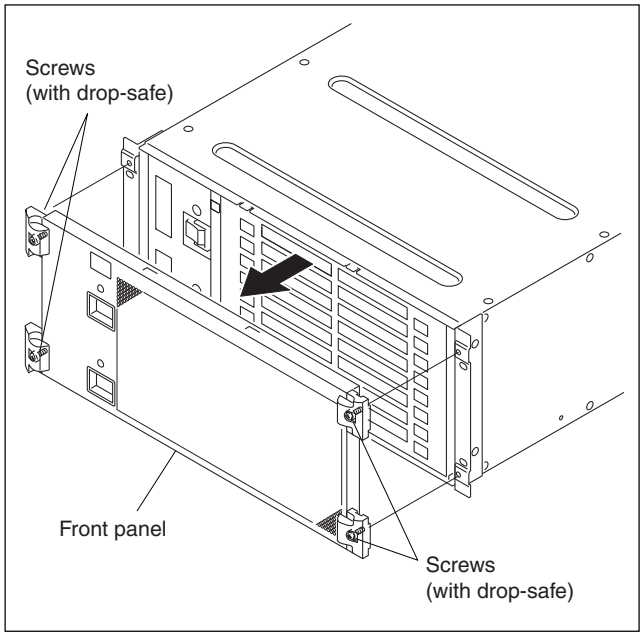


1-2-2. Power Supply Unit Replacement

1. Remove the front panel. (Refer to Section 1-2-1.)
2. Remove the two screws (B3 × 5) and remove the PS cover.
3. Remove the two screws (PSW3 × 6) and pull the power supply unit out in the direction of the arrow by holding the handle.

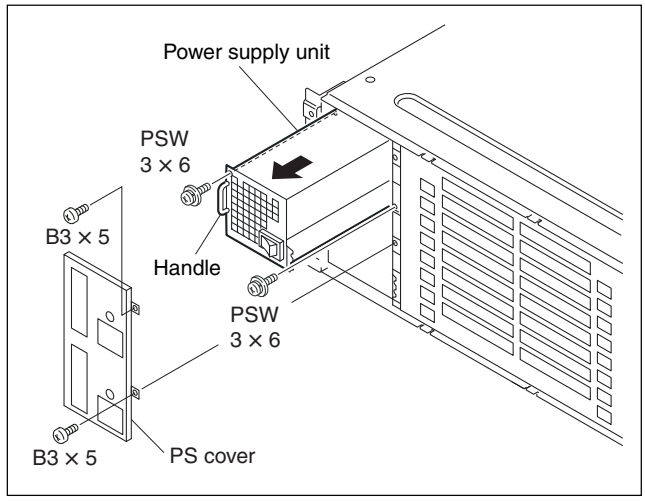

4. Push the power supply unit by applying force into the portion marked by the arrow in the illustration until clearance is removed at the portion A.
5. Install the new power supply unit, the PS cover and the front panel by reversing the steps of removal.

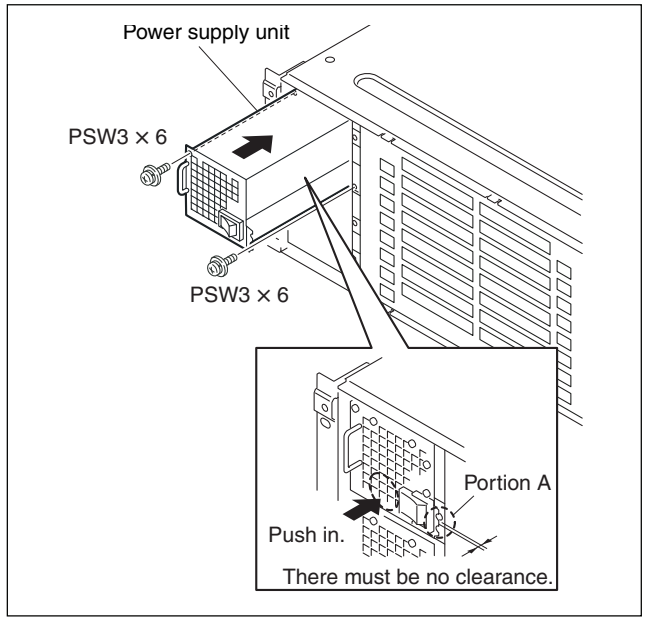

6. Reset the elapsed time of the new power supply unit. (Refer to Section 1-9-5.)


1-2-3. Fan Replacement

CAUTION


Be sure to set the POWER switch to OFF and unplug the power cord before starting any of the replacement work to protect inside of the machine from damage.
If the replacement work is attempted with the power ON, it may result in electric shock or damage of circuits.

Fan (Both Sides of Rear) Replacement

1. Turn the power off, and then unplug the power cord.
2. Loosen the two screws fully and pull out the fan assembly.

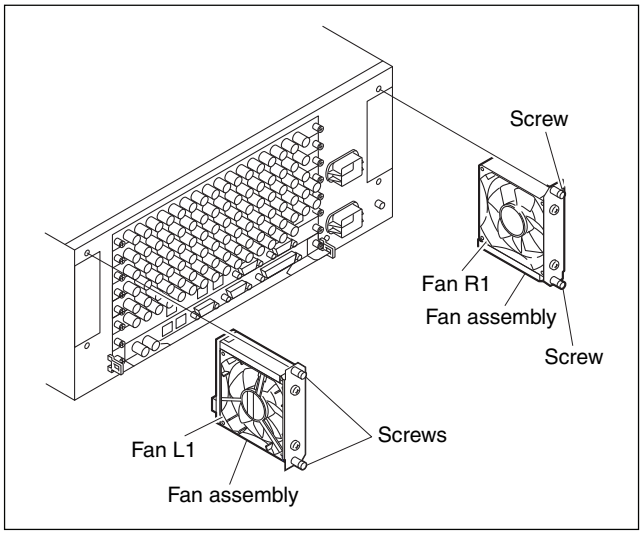

3. Remove screw A (two pieces), and remove the fan panel.
4. Remove screw B (two pieces), and remove the fan bracket (2).

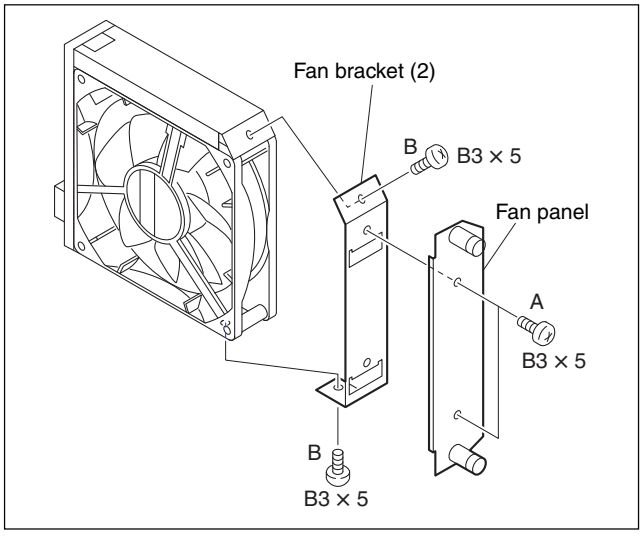


5. Unplug the harness from connector CN2 on the HN-305A board.
6. Open the fan bracket (1) in the direction A and pull out the fan in the direction B.
7. Fold and bind the harness of the new fan as illustrated.
8. Make the harness pass through the hole of the fan bracket (1) and plug it in connector CN2 on the HN-305A board.
9. Fit the new fan to the claws on the fan bracket (1).

Notes

- Mind the fan label side and the harness direction.
- Take care that the harness is not pinched with the fan and the bracket.


10. Install the fan by reversing steps 1 through 4.

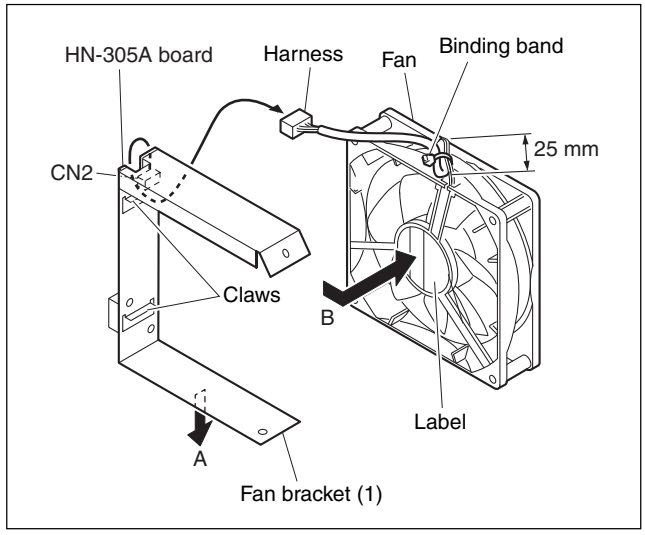


11. Reset the elapsed time of the new fan.
(Refer to Section 1-9-6.)

Power Supply Unit Fan Replacement

1. Remove the power supply unit. (Refer to Section 1-2-2.)
2. Remove the three screws (K3 × 5) and the four screws (PS3 × 6). Open the upper cover assembly in the direction of the arrow, and remove it. (The harness connected with the upper cover assembly need not remove it.)

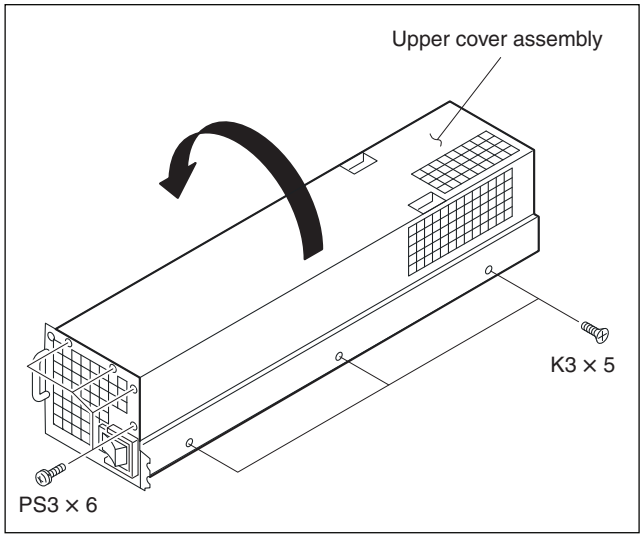

3. Remove the two screws (PS3 × 6) and remove the fan assembly.
4. Remove the harness from the fan connector.
5. Remove the two nylon rivets and remove the fan from the fan bracket.

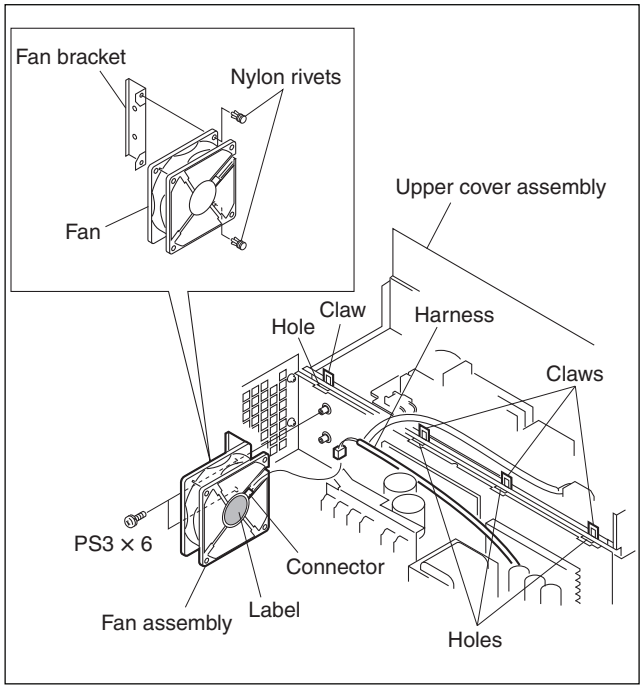

6. Assemble and install a new fan into the power supply unit by reversing steps 1 through 5.

Notes

- Mind the fan label side and connector direction.
- Install the upper cover assembly by inserting the four craws in the holes of the power supply unit chassis.
- When installing the fan and the upper cover assembly, be careful not to pinch the harness.

1-2-4. Fuse and IC Link Replacement

WARNING

The fuse and IC link are essential parts for safe operation. Replace the components with Sony parts whose part numbers appear in the manual published by Sony. If the components are replaced with any parts other than the specified ones, it may cause a fire or electric shock.

This unit is equipped with Fuse(s) and IC link(s).
If an excessive current flows due to abnormality inside the equipment, the fuse and/or IC link blow. When they blow, turn off the main power of the equipment, and remove the cause of excessive current.
After that, replace the fuse and/or IC link.

Board	Ref. No. (Address)	Part No./Name
CA-54C	F1 (B-1)	⚠ 1-576-329-21 Fuse 10 A/125 V
	PS1 (E-2)	⚠ 1-576-124-21 IC link 1 A/72 V
CA-54CFE	F1 (B-1)	⚠ 1-576-329-21 Fuse 10 A/125 V
	PS1 (E-2)	⚠ 1-576-124-21 IC link 1 A/72 V
CN-3147	PS1 (L-1)	⚠ 1-576-677-21 IC link 4 A/72 V
CNI-32	PS1 (L-1) PS2 (A-2) PS3 (E-1)	⚠ 1-576-677-21 IC link 4 A/72 V
CNI-35	PS1 (L-1) PS2 (A-2) PS3 (D-1)	⚠ 1-576-677-21 IC link 4 A/72 V
CNO-24	IF1701 (J-1)	⚠ 1-576-329-21 Fuse 10 A/125 V
CNO-35	PS101 (K-1) PS102 (F-2)	⚠ 1-576-677-21 IC link 4 A/72 V
CNO-36	PS101 (K-1) PS102 (F-2)	⚠ 1-576-677-21 IC link 4 A/72 V
DVP-49	F1 (R-1)	⚠ 1-576-566-21 Fuse 15 A/65 V
	F101 (N-1) F102 (L-1) F103 (J-1) F104 (G-1) F105 (E-1)	⚠ 1-533-627-21 Fuse 5 A/125 V
FC-109	F201 (R-1)	⚠ 1-576-329-21 Fuse 10 A/125 V
	F202 (E-1) F203 (J-1) F204 (B-1) F205 (G-1)	⚠ 1-533-627-21 Fuse 5 A/125 V
HN-305A	F1 (C-2)	⚠ 1-533-627-21 Fuse 5 A/125 V
MIX-52	F1 (R-1)	⚠ 1-576-566-21 Fuse 15 A/65 V
	F200 (H-1) F201 (L-1) F202 (N-1) F203 (K-1) F204 (G-1) F205 (E-1) F206 (C-1)	⚠ 1-533-627-21 Fuse 5 A/125 V
MY-114	F200 (G-1) F201 (E-1) F202 (C-1) F203 (L-1) F204 (J-1)	⚠ 1-533-627-21 Fuse 5 A/125 V
	F205 (R-1)	⚠ 1-576-329-21 Fuse 10 A/125 V
OUT-33	F201 (R-1)	⚠ 1-576-566-21 Fuse 15 A/65 V
	F202 (N-1) F203 (L-1) F204 (K-1) F205 (H-1)	⚠ 1-533-627-21 Fuse 5 A/125 V
SG-272	F300 (A-1)	⚠ 1-533-969-21 Fuse 0.5 A/125 V
XPT-29	F1 (L-1)	⚠ 1-576-329-21 Fuse 10 A/125 V

1-3. Fixtures

Following fixtures are needed for MVS-6000 maintenance.

Part No.	Name and Usage
A-1148-051-A	Extension board EX-1015 For extension of the plug-in board
A-1650-499-A	PLD download tool (for USB port) For writing/rewriting the PLD data
J-7120-140-A	PLD download tool (for parallel port) For writing/rewriting the PLD data

1-4. PLD Data Writing/Rewriting

This section provides the procedure to rewrite data of the PLD on the circuit boards.

Equipment required

- A personal computer equipped with the parallel port
  For the target OS, refer to the Operation Manual supplied with the PLD Download Tool.
- PLD Download Tool for USB Port (A-1650-499-A)
  or
  PLD Download Tool for Parallel Port (J-7120-140-A)

Connection

1. Connect the PLD Download Tool to the USB port or the parallel port of the personal computer.
2. Connect the cable (8-pin connector) coming from the PLD Download Tool to the following connectors on the target boards.

Target Board	Connector	Project File No.
XPT-29	CN501	E-000-003-80-01
MY-114	CN3500	E-000-003-83-01
FC-109	CN1201	E-000-003-84-01
MIX-52	CN1500	E-000-004-36-01
DVP-49	CN1101	E-000-004-37-01
OUT-33	CN1901	E-000-004-38-01
CA-54C	CN1003	E-000-004-39-01
CA-54CFE	CN1003	E-000-004-45-01

Downloading

1. Start up the PLD Download Tool Software on the personal computer. After data for upgrading the PLD version is read, write the data and confirm that it is correctly written.

   Note

   For details of the operation, refer to the Operation Manual of the PLD Download Tool.

2. Upon completion of downloading, turn off the main power of the MVS-6000 once.

1-5. Periodic Replacement Parts

The following parts require periodic replacement.

Notes

- The replacement period shown in the following list are not guaranteed period of the parts. Use this list as guidelines form maintenance and inspection.
- The replacement period of each part is changed according to the environment and condition.

Part	Where used	Replacing parts	Replacement period	Remarks
Fan	Side on the rear of the MVS-6000	⚠ 1-787-007-21	Once in about 4 years	After replacement, reset the elapsed time of the new fan (Refer to Section 1-9-6.)
Power supply unit	MVS-6000	HK-PSU04	Once in about 7 years	After replacement, reset the elapsed time of the new power supply unit (Refer to Section 1-9-5.)
Built-in power supply unit fan	Power supply unit of the MVS-6000	⚠ 1-698-841-11	Once in about 3 years	–

1-6. How to Extend the Plug-in Board

The extension board EX-1015 is available to extend the plug-in board for MVS-6000.

Name: Extension Board EX-1015
Part No.: A-1148-051-A

The extension board EX-1015 is used when inspecting the following plug-in boards of the MVS-6000.


CA-54C, CA-54CFE, DVP-49, FC-109, MIX-52, MY-114, OUT-33, XPT-29

CAUTION


Be sure to set the POWER switch to OFF and unplug the power cord before inserting or pulling out the extension board.
If insertion/pulling-out is attempted with the power ON, it may result in electric shock or damage of circuits.

Procedure


1. Turn off the power and unplug the power cord.
2. Remove the front panel. (Refer to Section 1-2-1.)
3. Remove the four screws (B3 × 5) and remove the Extract PWB stopper assembly.

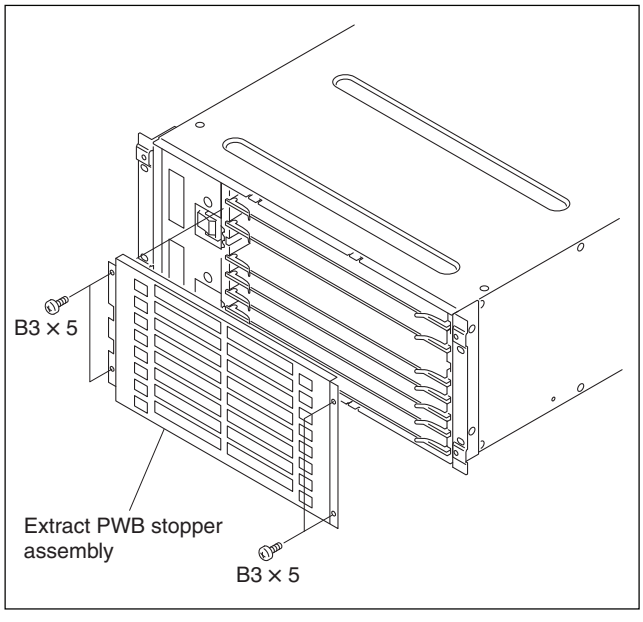


4. Draw the board to be inspected.
5. Insert the extension board EX-1015 into the slot from which the plug-in board is removed, in the direction of the arrow.

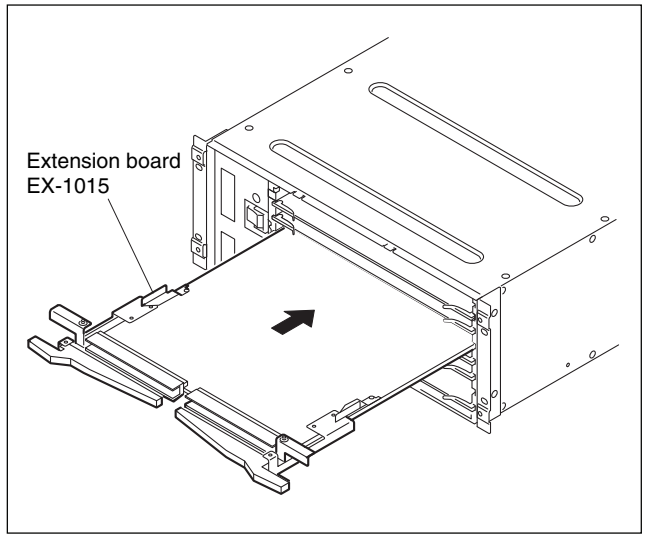

6. Close the EX levers in the direction of arrow A and lock it.
7. Open the rail in the direction of arrow B.

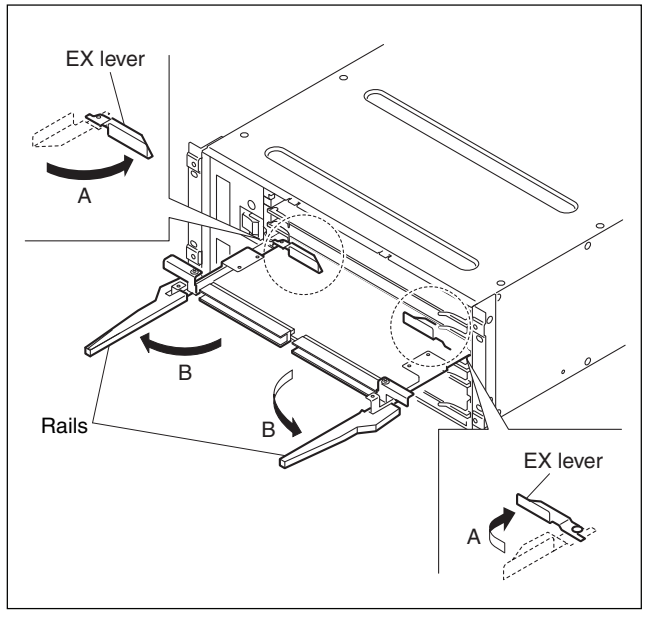


8. Move the lever in the direction of arrow A.
9. Insert the plug-in board that is removed in step 4, into the rail groove. Push the board in with force until it is connected securely.

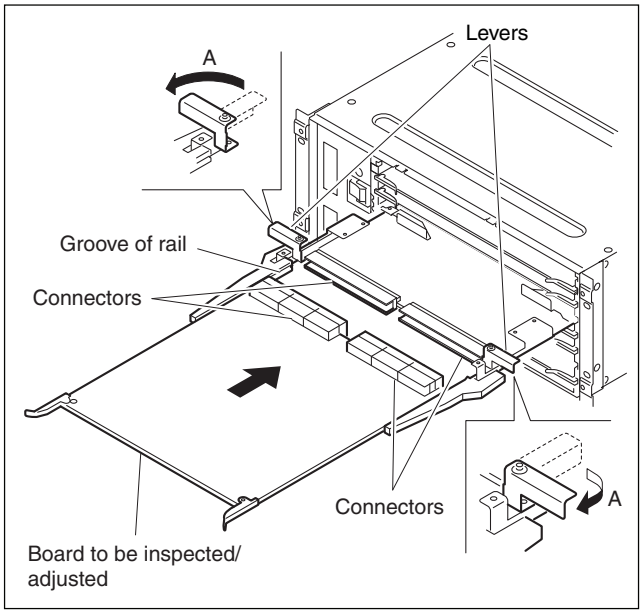

Note

To remove the inspected/adjusted board, close the levers on both sides in the direction of the arrow A.

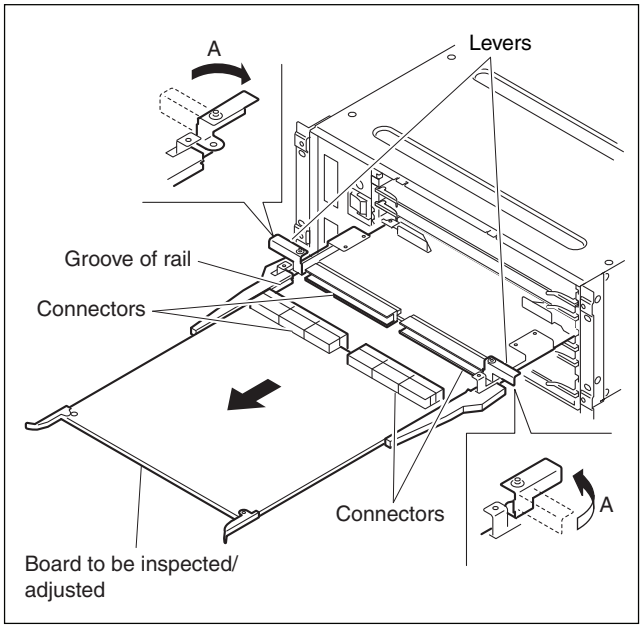

1-7. Unleaded Solder

Boards requiring use of unleaded solder are printed with a lead free mark (LF) indicating the solder contains no lead. (Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size.)

: LEAD FREE MARK

Notes

- Be sure to use the unleaded solder for the printed circuit board printed with the lead free mark.
- The unleaded solder melts at a temperature about 40 °C higher than the ordinary solder, therefore, it is recommended to use the soldering iron having a temperature regulator.
- The ordinary soldering iron can be used but the iron tip has to be applied to the solder joint for a slightly longer time. The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful.

1-8. Circuit Description

This section provides the circuit description of MVS-6000 and optional boards.
Each circuit block is described respectively as follows:

1. Cross-point Block
2. M/E Block
3. Output Processor Block
4. Frame Memory Block
5. CPU and SG Block
6. Color Corrector Block
7. Format Converter Block
8. DME Block

1. Cross-point Block

(1) XPT-29 Board (MVS-6000)

The XPT-29 board is used to constitute the serial matrix of 64 × 64.
All input signals and all internal entry signals are input to the XPT-29 board from which these signals are sent to the M/E block and Output Processor block and other blocks via the matrix.
The cross-point block is controlled by the local CPU mounted on the OUT-33 board that is inserted in slot 1.

(2) CNI-35 Board (MVS-6000)

The CNI-35 board is a connector board installed at the rear of the unit.
This board consists of the following circuits.

- A signal equalizer to compensate SDI signal characteristics
- A buffer to send input signals to the FC-109 board
- A signal selector to select input signals or format-converted signals
- The signals are sent to the XPT-29 board.

(3) CNI-32 Board (MKS-8110G)

The CNI-32 board is connector board at the rear of the unit.
This board consists of the following circuits:

- A signal equalizer to compensate SDI signal characteristics
- The signals are sent to the XPT-29 board.

2. M/E Block (After acquiring the simple P/P software license, it works as the ME1 and ME2.)

The M/E block consists of the two M/E systems. It accepts the input signals of 24 channels from the cross-point block and returns the output signals of 9 channels (4 channels from the M/E 1 and M/E2 respectively and 1 channel from the CLBG) to the cross-point block.
In addition to the above, this block sends and receives the input/output signals to (from) the DVP-49 board, which are the dedicated signals between the M/E block and the MVE.
In the MVS-6000, the entire M/E processing for the two M/E systems is performed within the single board (MIX-52 board).
When the simple P/P software is not installed, the M/E block performs the functions of P/P and M/E1.

MIX-52 Board (MVS-6000)

[SDI I/O block]: IC2, IC3 and IC4
The 24-channel SDI signals supplied from the cross-point block are converted to the parallel signals, and are sent to the key process block and the mixer block.
In this block, the phase difference between the input signals is absorbed (TBC), and the video signal processing (video level adjustment for each input) is performed.
At the same time, the signals supplied from the mixer block are converted to the SDI signals, and are sent to the cross-point block.

[Key process block]: IC5 to IC12
A single pair of ICs processes the two KEYER channels. (Example: The IC5 and IC6 are used for the key processing of M/E1_KEY1&3 where IC5 is used for signal I/F and IC6 is used for processing.) The four pairs of the ICs in total are used for the M/E1 and M/E2. They perform the key processing of M/E1_KEY1&3, M/E1_KEY2&4, M/E2_KEY1&3 and M/E2_KEY2&4.
In this block, the key signal processing such as the Luminance Key processing, the Linear Key processing and the Chroma Key processing are performed on all of the KEYER channels. A mask signal is generated in this block. These processed key signals are sent to the mixer block together with the generated signals.
The respective KEYER channels have the different functions. Especially, the Resizer and the Key_Edge functions can be used in KEY1&2.

[Resizer block]: IC6, IC8, IC10 and IC12
This block works in the same IC (so called Image Processor) as the above Key process block works.
The main functions of the resizer are shown below. (Some of these functions are provided for two channels.)
(1) Enlargement, reduction, move and aspect
(2) Crop and border
(3) Mosaic, edge enhancement and defocusing
(4) Mask, drop shadow and wide key border (threefold choice)
(5) DME Wipe (Slide, squeeze, frame in/out, etc,)

[Wipe/color background signal generator]: IC13
This block generates the wipe signal, the Color Wash signal to be used in the wipe border and the color background signal, and sends them to the mixer block.

[Mixer block]: IC13
This block mixes the three signals: the signal directly supplied from the SDI I/O block, the KEY signal supplied from the key process block, and the wipe signal supplied from the wipe/color background signal generator block to generate the M/E1 and the M/E2 output signals.
The color background signal is sent to the SDI I/O block without being processed in this block.
Furthermore, when a DME effect is selected, the signal to which the DME effect is to be applied is output from the mixer block to the MVE I/F block, and the signal to which the effect is applied in the DME block is sent back to the mixer to be mixed with other signals.

[Control block]
The MIX-52 board is controlled mainly by the local CPU module (CPU-DT) on this board.
Each KEYER is controlled by the local CPU of the respective Image Processors.

3. Output Processor Block

(1) OUT-33 Board (MVS-6000)

In the OUT-33 board, the 24-channel SDI signals that are input from the XPT-29 board are sent to the OUTPUT PROCESSOR ICs (IC2, IC3 and IC4) where the processes such as video processing, blanking, and addition of a safe title are performed. The processed signals are output from the CNO-35 board (channel 1 to channel 12) and the CNO-36 board (channel 13 to channel 24).
By adding the simple P/P software BZS-6250, the OUT-33 board implements the P/P function (P/P; Program/Preset function) that is a simplified Mix/Effect function, and the DME Wipe function of the BKGD bus is provided.
By installing the FC-109 board (MKS-8450G), the OUT-33 board allows 2-channel format conversion output. The signals whose format is converted of the format by IC8 and IC9 are again converted to the SDI signal by IC5, and are output from the CNO-35 board.
The OUT-33 board is controlled by the CPU module (CPU-DT) on this board. The XPT-29 board and the FC-109 board are also controlled by the CPU module (CPU-DT) on this board at the same time.

(2) CNO-35 Board (MVS-6000)

The CNO-35 board is a 14-channel output connector board installed at the rear of the unit.
This board includes the SDI signal output drivers.
The signals for channel-1 and channel-2 have the 2-channel output capability, and the signals for channel-3 to channel-12 have the 1-channel output capability. In addition, this board has the FC OUT 1 and FC OUT 2 output signals.

(3) CNO-36 Board (MVS-6000)

The CNO-36 board is a 12-channel output connector board installed at the rear of the unit.
This board includes the SDI signal output drivers.
The signals for channel-1 to channel-4 have the 2-channel output capability, and the signals for channel-5 to channel-12 have the 1-channel output capability.

4. Frame Memory Block

The frame memory block consists of the MY-114 board (MKS-8442G) that has the 2-channel input and 8-channel output.

MY-114 Board (MKS-8442G)

The MY-114 board (MKS-8442G) has functions to store the 2-channel signal in the SDRAM memory as a still picture and to output the stored still picture signal to 8-channels.
This board converts the 2-channel SDI signal supplied from the XPT-29 board to parallel signals, eliminates phase differences, performs video signal processing (including video level adjustment for each input), and then the processing results in the memory. The output picture signal from the memory is converted to the SDI signal again and the SDI signal is sent to the XPT-29 board.

This board also has a signal bypass circuit to bypass input signals directly to the output to check an image to be stored.
This board is equipped with the network interface for image transfer between devices connected on the LAN through the FM DATA LAN, and is also equipped with the i.LINK interface for reading and writing images on the external hard disk dedicated for the frame memory. The frame memory block is controlled by the single local CPU, and the CPU module (CPU-DT) is mounted on the MY-114 board.

5. CPU and SG Block

MVS-6000 Switcher Block

The CPU and SG block consists of the single CA-54C board.

CA-54C Board (MVS-6000)
The CA-54C board performs the following processing.

- Generating a clock and a timing signal that are synchronous with the reference signal, and sending them to other circuit boards
- Control LAN and data LAN communication
- RS-422 communication
- GPI input/output
- Control of the MVS-6000 switcher block

The clock and the timing signal are generated by the SG-272 board on the CA-54C board. The CA-54C board includes the following three CPU modules.

- Main CPU module (CPU-DT module) that controls the MVS-6000 switcher block and performs the GPI input and output
- CPU-DK module for control LAN communication
- CPU-DK module for data LAN communication

The MVS-6000 switcher block control is achieved in practice by establishing the dedicated serial data communication (INET) between the main CPU and the local CPUs that are installed respectively in the M/E block, output processor block, and frame memory block.

The RS-422 communication is controlled by the SIO-26 board on the CA-54C board.

MKS-6470 DME Block

CA-54CFE Board

The CA-54CFE board performs the following signal processing.

- Synchronous control by receiving the VD signal from the CA-54C board of the MVS-6000 Switcher block.
- The DME Control LAN communication and the DME Data LAN communication
- RS-422 communication
- GPI input/output
- Control over the entire MKS-6470 system

The CA-54CFE board contains the following three CPU modules.

- The main CPU module (CPU-DT module) that controls the entire MKS-6470 system, and controls the GPI input and output.
- The CPU-DK module for the DME Control LAN communication
- The CPU-DK module for the DME Data LAN communication

At the same time, the DIF-184 board is installed in the CA-54CFE board. The DIF-184 board has the function of interfacing and controlling the compact flash card that is installed in the DIF-184 board.

The compact flash card in the DIF-184 board contains the MKS-6470 system program and the configuration data of the respective FPGAs that are installed on each board.

The DIF-184 board is controlled by the COM CPU2 on the CA-54CFE board via the PCI bus.

Interface between the PCI bus and the compact flash card, and the control of the interface are performed by PCI1420PDV (IC1) on the DIF-184 board. The DIF-184 board has the two sockets for compact flash card: socket A and socket B. The socket A contains the compact flash card in which all of the data that are required to start up the MKS-6470 system are saved. The socket B is the spare socket used for data copying and others.

The 3.3 V power is supplied from the CA-54CFE board.

The MKS-6470 system is controlled by the local CPU that is installed in the DVP-49 board using a dual port memory.

6. Color Corrector Block

The color corrector block consisting of the MY-114 board (MKS-8442G) has 2-channel input and 2-channel output.

MY-114 Board (MKS-8442G)

The MY-114 board converts the 2-channel SDI signal supplied from the XPT-29 board to parallel signals, eliminates phase differences, and then performs color correction. After that, the parallel signals are converted to the SDI signal, and the SDI signal is sent to the XPT-29 board.

The color corrector block is controlled by the single local CPU (CPU-DT module) mounted on this board.

7. Format Converter Block

The format converter block on the input side consists of the input connector board and the FC-109 board.

The format converter block on the output side consists of the FC-109 board, the OUT-33 board, and the output connector board.

FC-109 Board (MKS-8450G)

The FC-109 board performs the following.

- Generates clock and timing signals in synchronization with the reference signal for use on this board, and also sends these clock and timing signals to the OUT-33 board.
- The FC-109 board performs the format conversion for eight channels per board.
- The FC-109 board is controlled by the local CPU on the OUT-33 board.

The FC-109 board converts the 8-channel SDI signals supplied from the input connector board to parallel signals using the clock and timing signals generated by the SG-272 board on the FC-109 board.

The converted parallel signals are sent to the format converter block through the interface block for format conversion. The converted signals are returned through the interface block and converted to serial signals. The serial signals are then returned to the input connector board.

The input connector board selects input signals or format-converted signals to be used. Control signals are sent from this board to the input connector board, but they are controlled by the local CPU on the OUT-33 board.

8. DME Block

DVP-49 Board (MKS-6470)

The DVP-49 board consists of the control block and the signal processing block.
The control block consists of the sub CPU (CPU-DT) that receives the commands from the main CPU (CA-54CFE board) via a dual port RAM (IC701), and controls the signal processing block via BOOT PLD (IC6).
The FPGA is controlled by the sub CPU via FPGA IF (IC5).
The sub CPU starts up by the 1st boot of the flash memory that is contained in the own sub CPU. After that, applications start up by the 2nd boot of the booting flash memory (IC801) on the DVP-49 board.
The BOOT PLD performs configuration of the other FPGAs on the DVP-49 board using the address decode to the sub CPU peripheral devices, and using the configuration data that is stored in the configuration flash memory (IC802 and IC803) as controlled by the sub CPU.
The configuration data and the applications that are stored in the flash memory are newly rewritten when the installation work is done by the compact flash located in the main CPU side.
The signal processing block consists of the 4 FPGAs that are Pre Video Modify (PVM), Filter (FILTER), Address Generator & Interpolator (AINTP) and Mixer (MIX).
The abbreviated names shown in parenthesis ( ) are used for the descriptions below.
The respective FPGAs have the following main functions.

(1) PVM (IC1)
- Border/Crop/Beveled Edge
- Video Modify (Posterization, Solarization, Mosaic and others)
- Input Freeze
- Mask key generation

(2) FILTER (IC2)
- Anti-alias Filter (Horizontal and vertical directions)
- Scan Conversion
- Field/Frame Conversion
- Defocus/Blur
- Through Image for Mask

(3) AINTP (IC3)
- 3D Linear Transform
- Interpolation
- Lighting

(4) MIX (IC4)
- Recursive/Drop Shadow
- Combine
- Graphic

The signal flow is described below.
The video and key signals of the main signal line are supplied from the MIX-52 board via the LVDS transmission and are received by the LVDS receiver (IC1401 to IC1403). Then, these signals are sent to the PVM.
In the PVM, these signals receive the signal processing such as Input Freeze, Video Modify and Border/Crop/Beveled Edge using the DDR SDRAM (IC1701 and IC1703). The video and the key signals are sent to the FILTER.
In the FILTER, these signals receive the filtering processing (anti-alias filtering) in accordance with the Defocus/Blur in the horizontal direction, and the compression ratio. After that, these signals receive the data rearrangement (Scan Conversion) using the DDR SDRAM (IC1801, IC1802, IC1901 and IC1902). These signals also receive the Defocus/Blur in the vertical direction, and then receive the anti-alias filtering.
These signals also receive the Field/Frame Conversion using the DDR SDRAM (IC2001). The output data are sent to the AINTP where they are stored in the ZBT SRAM.
In the AINTP, the address of the 3D Linear Transform is generated and the data is read from the ZBT SRAM at the generated address to perform the interpolation processing. The interpolated video and the key signals are sent to the MIX where the Lighting process is performed by the Light key that is generated by AINTP.
In the MIX, the Recursive processing using the DDR SDRAM (IC2701 and IC2703) is performed, and the video and the key signals of the main signal line are sent to the MIX-52 board via the LVDS transmission using the LVDS transmitter (IC1601 to IC1603). At the same time, the video and the key signals for the DME MONITOR are sent to the OUT-33 board via the LVDS transmission using the LVDS transmitter (IC1604 and IC1605).

1-9. Maintenance Menu

The MVS-6000 executes the self-diagnosis in the following cases.
- When the unit is turned on
- When the unit is reset from the control panel (CCP-8000/9000/6224/6324) of the connected system
- When the reset switch S401 on the CA-54C board is pressed

The self-diagnosis is also performed during operation on a periodic basis.
You can check the self-diagnosis result with the maintenance menu.
The following describes the structure and contents of the maintenance menu.

Menu Items (Menu Number)

Maintenance Menu
- Maintenance Main (9991) ..... Displays the latest measurement data.
- Maintenance Latest Error (9991.1) ..... Displays recent errors.
- Maintenance Circuit Board (9991.2)..... Displays the front board operating status and temperature sensor measurement result
- Maintenance PSU (9991.3) ..... Displays and resets the total operating hours of power supply unit
- Maintenance Fan (9991.4) ..... Displays the speed and total operating hours of fan

1-9-1. Calling the Maintenance Menu

Use the control panel (CCP-8000/9000/6224/6324) of the system connected to the unit for maintenance menu operations.

1. Press a top menu selection button at the upper left of the menu display.
   The top menu window appears.
2. Enter a menu number with the numeric keypad.

Menu Item	Menu Number
Maintenance Main	9991
Maintenance Latest Error	9991.1
Maintenance Circuit Board	9991.2
Maintenance PSU	9991.3
Maintenance Fan	9991.4

3. Press the Enter button.
4. Repeat steps 2 and 3 twice.
   The selected menu item is displayed.

   Note

   A menu number must be entered three times in total.

1-9-2. Maintenance Main Menu

This menu displays the latest measurement data obtained during the self-diagnosis.

Status area

Normal operation

Category/Sub Category		Status	Comment
Circuit Board	Function	OK	
	Temperature	OK	Slot 10 FC-109 (50)
PSU	Function	OK	
	Operation Hours	OK	PowerA (10000h)
Fan	Fan Speed (Min)	OK	FAN-L2 (3120)
	Fan Speed (Max)	OK	
	Operation Hours	OK	FAN-L1 (10000h)

When an error is detected

Category/Sub Category		Status	Comment
Circuit Board	Function	Error	Slot 9 XPT-25
	Temperature	Error	Slot 10 FC-109 (80)
PSU	Function	Error	PowerA
	Operation Hours	Error	PowerA (30132h)
Fan	Fan Speed (Min)	Error	FAN-L2 (1000)
	Fan Speed (Max)	Error	FAN-L1 (4500)
	Operation Hours	Error	FAN-L1 (30132h)

Function button area



Sub Category	Description	Status	Comment
Function	Front board operating status	OK	Not displayed
	(CPU error)	Error	The slot number and board name of the faulty board are displayed.
Temperature	Internal temperature error	OK, Error	The slot number, board name, and temperature (°C) of the highest-temperature board are displayed.
PSU Function	Power supply unit operating status	OK	Not displayed
		Error	The power supply unit name with abnormal AC, DC, or fan is displayed.
PSU Operation Hours	Total operating hours of the power supply unit	OK, Error	The power supply unit name with maximum operating hours and the total operating hours are displayed.
Fan Speed (Min)	Minimum fan speed	OK, Error	The name and the speed (rpm) of the fan with the lowest (or zero) speed are displayed.
Fan Speed (Max)	Maximum fan speed	OK, Error	The name and the speed (rpm) of the fan with the highest speed exceeding the specified upper limit are displayed.
Fan Operation Hours	Total operating hours of the fan	OK, Error	The name and the total operating hours of the fan with the maximum operating hours are displayed.

Notes

- When no problem occurred during the self-diagnosis, “OK” is indicated in the Status column. If any problem was detected, “Error” is indicated.
- In the Comment column, fan names are written as FAN-L1, FAN-L2, . . . and power supply unit names are written as PowerA, PowerB, . . . to identify each fan. For the installation location of these parts, refer to Section 1-1 “Location of Main Parts.”
- Only one name is displayed in the Comment column even if there are two or more applicable names.

Buttons

Circuit Board button:	This switches the menu to the Maintenance Circuit Board menu.
PSU button:	This switches the menu to the Maintenance PSU menu.
Fan button:	This switches the menu to the Maintenance Fan menu.
SWR1 button:	This displays the Maintenance Main menu of Switcher 1.
SWR2 button:	This displays the Maintenance Main menu of Switcher 2.
PNL button:	This displays the Maintenance Main menu of PNL.
DME1 button:	This displays the Maintenance Main menu of DME1.
DME2 button:	This displays the Maintenance Main menu of DME2.
Latest Err button:	This switches the menu to the Maintenance Latest Error menu.
Board Config button:	Not supported.

1-9-3. Maintenance Latest Error Menu

This menu displays the error location and time of recent errors using the self-diagnosis result.

Status area

Category/Sub Category		Latest Error	
Circuit Board	Function		
	Temperature	Slot 10 FC-109	Dec 15. 2006 10:00:00
PSU	PSU Function		
	PSU Operation Hours	PowerA	Jan 15. 2007 12:00:00
Fan	Fan Speed (Min)	FAN-L2	Nov. 10. 2006 17:30:00
	Fan Speed (Max)		
	Fan Operation Hours	FAN-L1	Jan 15. 2007 12:00:00

Function button area



Sub Category	Description	Error Location
Function	Front board (CPU) error	The slot number of the board and board name are displayed.
Temperature	Internal temperature error	The slot number of the board and board name are displayed.
PSU Function	Power supply unit error	The power supply unit name is displayed.
PSU Operation Hours	Guaranteed operating hours of PSU exceeded	The power supply unit name is displayed.
Fan Speed (Min)	Minimum fan speed error	The fan name is displayed.
Fan Speed (Max)	Maximum fan speed error	The fan name is displayed.
Fan Operation Hours	Guaranteed operating hours of fan exceeded	The fan name is displayed.

Note

In the Latest Error column, fan names are written as FAN-L1, FAN-L2, . . . and power supply unit names are written as PowerA, PowerB, . . . to identify each fan. For the installation location of these parts, refer to Section 1-1 “Location of Main Parts.”

Buttons

Circuit Board button: This switches the menu to the Maintenance Circuit Board menu.
PSU button: This switches the menu to the Maintenance PSU menu.
Fan button: This switches the menu to the Maintenance Fan menu.
SWR1 button: This displays the Maintenance Main menu of Switcher 1.
SWR2 button: This displays the Maintenance Main menu of Switcher 2.
PNL button: This displays the Maintenance Main menu of PNL.
DME1 button: This displays the Maintenance Main menu of DME1.
DME2 button: This displays the Maintenance Main menu of DME2.
Maintenance Main button: This switches the menu to the Maintenance Main menu.

1-9-4. Maintenance Circuit Board Menu


This menu displays the front board operating status and the measurement result of the onboard temperature sensor.
This menu also displays errors that require board replacement.

Note


When one control board is monitoring the operation of other controlled boards simultaneously, and if the control board malfunctions, the controlled boards can no longer be monitored. For this reason, the controlled boards are also regarded as faulty and an error is displayed.
Combinations of control boards and controlled boards are as follows:

	Control Board	Board Controlled
MVS-6000	Slot 1 (OUT-33)	Slot 2 (XPT-29), Slot 5 (FC-109)

Status area

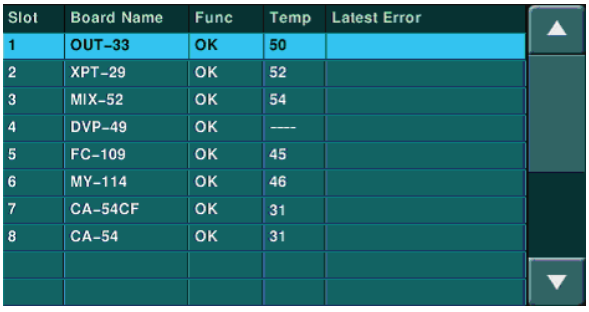

Function button area

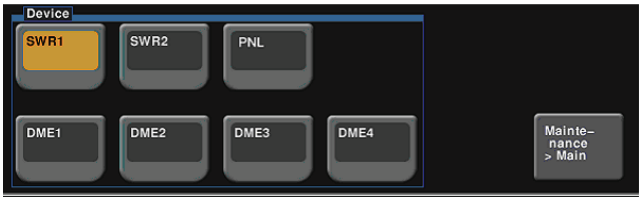

Status area description

When the board is installed in a wrong slot or no board is installed in the slot, the slot number and name of the board that should be installed in the slot are displayed gray.

When the board is installed in a wrong slot or the board is not working correctly, "???" is indicated in the Board Name column, and "Error" in the Func column.

Items

Func: "OK" is indicated when the CPU on the board is working correctly, and "Error" is indicated if the CPU malfunctions.

Temp: The temperature (˚C) measured by the onboard temperature sensor is displayed.
If the temperature exceeds the specified value (90 ˚C), the measured temperature is displayed yellow.

Latest Error: The date and time of the latest error are displayed.

Buttons

SWR1 button:	This displays the Maintenance Main menu of Switcher 1.
SWR2 button:	This displays the Maintenance Main menu of Switcher 2.
PNL button:	This displays the Maintenance Main menu of PNL.
DME1 button:	This displays the Maintenance Main menu of DME1.
DME2 button:	This displays the Maintenance Main menu of DME2.
Maintenance Main button:	This switches the menu to the Maintenance Main menu.

1-9-5. Maintenance PSU Menu


This menu displays the operating status and total operating hours of power supply units. This menu also resets the total operating hours.
This menu displays errors that require replacement of power supply units.

Notes


- As many power supply units as those required for the system operation must be working (MVS-6000: 1 unit).
- This unit cannot distinguish a power supply unit failure from the power-off state. When all the power supply units are turned off in a predetermined time (10 seconds), the system determines that the power of the power supply units is off. Therefore, if an option power supply unit is installed with its power off, the power supply units is regarded as faulty though it is in a normal state.

Status area

MVS-6000

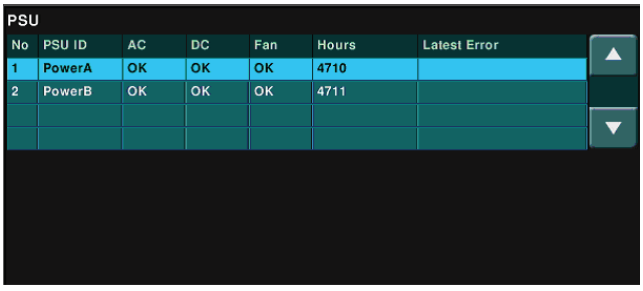

Function button area

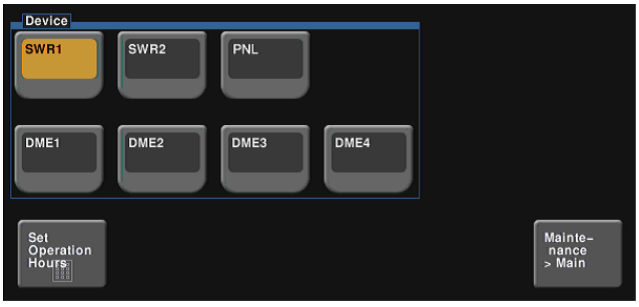

Items

PSU ID: Power supply unit names is displayed.
If no power supply unit is installed, contents in the No and PSU ID columns are displayed gray.

Note

Each power supply unit is indicated as “Power A” or “Power B” to enable identification of the target fan. For the installation locations, refer to Section “1-1. Location of Main Parts”.

AC, DC, Fan: The AC, DC, and fan states of each power supply unit are displayed.
“OK” is indicated when the power supply unit is working correctly, and “Error” is indicated if the power supply unit malfunctions.

Hours: The total operating time (hours) of each power supply unit is displayed.
If the total operating time exceeds the guaranteed value, it is displayed yellow.

Latest Error: The date and time of the latest error are displayed.


Buttons

SWR1 button:	This displays the Maintenance Main menu of Switcher 1.
SWR2 button:	This displays the Maintenance Main menu of Switcher 2.
PNL button:	This displays the Maintenance Main menu of PNL.
DME1 button:	This displays the Maintenance Main menu of DME1.
DME2 button:	This displays the Maintenance Main menu of DME2.
Set Operation Hours button:	This sets the total operating hours of the selected power supply unit.
Maintenance Main button:	This switches the menu to the Maintenance Main menu.

Resetting Total Operating Hours

When a power supply unit is replaced, its total operating hours must be reset.
Reset the total operating hours using the following procedure.

1. Select the replaced power supply unit or fan from the status area.
2. Press the Set Operation Hours button.
   The confirmation message appears.

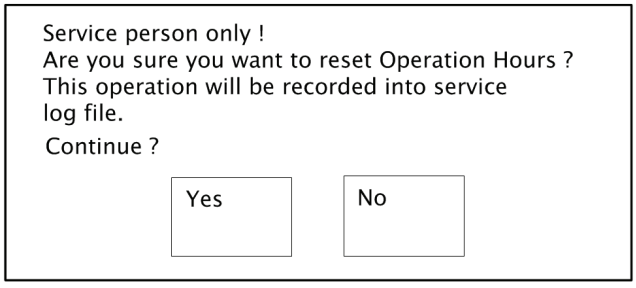


3. Press the Yes button.
   The numeric keypad window appears.
4. Enter “0” and press the Enter button.
5. Check that the total operating hours of the selected power supply unit is reset to “0” in the Hours column in the status area.

1-9-6. Maintenance Fan Menu


This menu displays the speed and total operating hours of fans. This menu also resets the total operating hours.
This menu displays errors that require replacement of fan.

Status area

MVS-6000

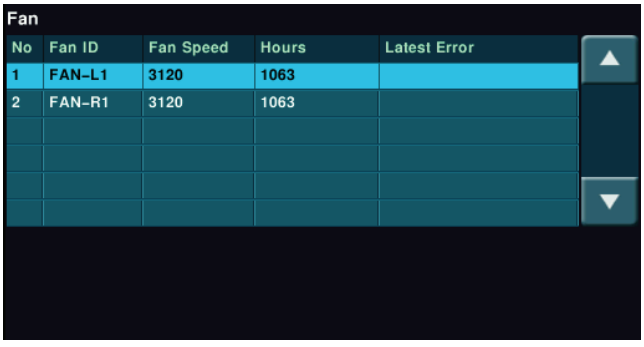

Function button area

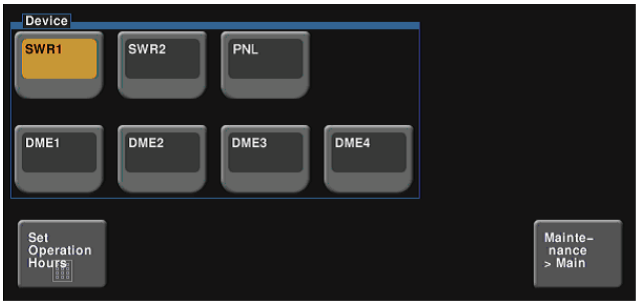

Items

Fan ID: Fan name is displayed.

Note

Each fan is indicated as “FAN-L1” or “FAN-R1” to enable identification of the target fan. For the installation locations, refer to Section “1-1. Location of Main Parts”.

Hours: The total operating time (hours) of fan is displayed.
If the total operating time exceeds the guaranteed value, it is displayed yellow.

Fan Speed: The fan speed (rpm) of each fan is displayed.
When the fan is not working or is not installed, “0” is indicated.
If the fan speed is outside the specified range, it is displayed yellow.

Latest Error: The date and time of the latest error are displayed.


Buttons

SWR1 button: This displays the Maintenance Main menu of Switcher 1.
SWR2 button: This displays the Maintenance Main menu of Switcher 2.
PNL button: This displays the Maintenance Main menu of PNL.
DME1 button: This displays the Maintenance Main menu of DME1.
DME2 button: This displays the Maintenance Main menu of DME2.
Set Operation Hours: This sets the total operating hours of the selected fan.
Maintenance Main button: This switches the menu to the Maintenance Main menu.

Resetting Total Operating Hours

When a fan is replaced, its total operating hours must be reset.
Reset the total operating hours using the following procedure.

1. Select the replaced power supply unit or fan from the status area.
2. Press the Set Operation Hours button.
   The confirmation message appears.

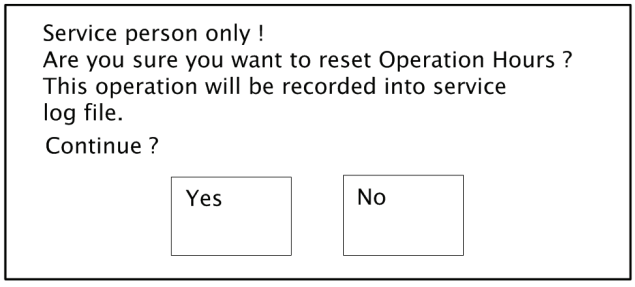

3. Press the Yes button.
   The numeric keypad window appears.
4. Enter “0” and press the Enter button.
5. Check that the total operating hours of the selected fan is reset to “0” in the Hours column in the status area.

1-9-7. Error Indication and Action

Errors as a result of the self-diagnosis and actions to be taken can be displayed with these menus.

Menu	Error Indication	Action
Maintenance Circuit Board	“Error” is indicated in the Func column.	Replace the faulty board. (Refer to Section 1-1.)
Maintenance PSU	“Error” is indicated in the AC, DC, or Fan column.	Replace the faulty power supply unit. (Refer to Section 1-2-2.)
	A value in the Hours column of a power supply unit is displayed yellow.	After replacement, reset the total operating hours. (Refer to Section 1-9-5.)
Maintenance Fan	A fan speed value is displayed yellow.	Replace the faulty fan. (Refer to Section 1-2-3.)
	A value in the Hours column of a fan is displayed yellow.	After replacement, reset the total operating hours. (Refer to Section 1-9-6.)

Section 2
Spare Parts

2-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

2-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。


3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス


部品番号が記載されていないハーネスは，サービス部品として登録されていません。

2-2. Exploded Views

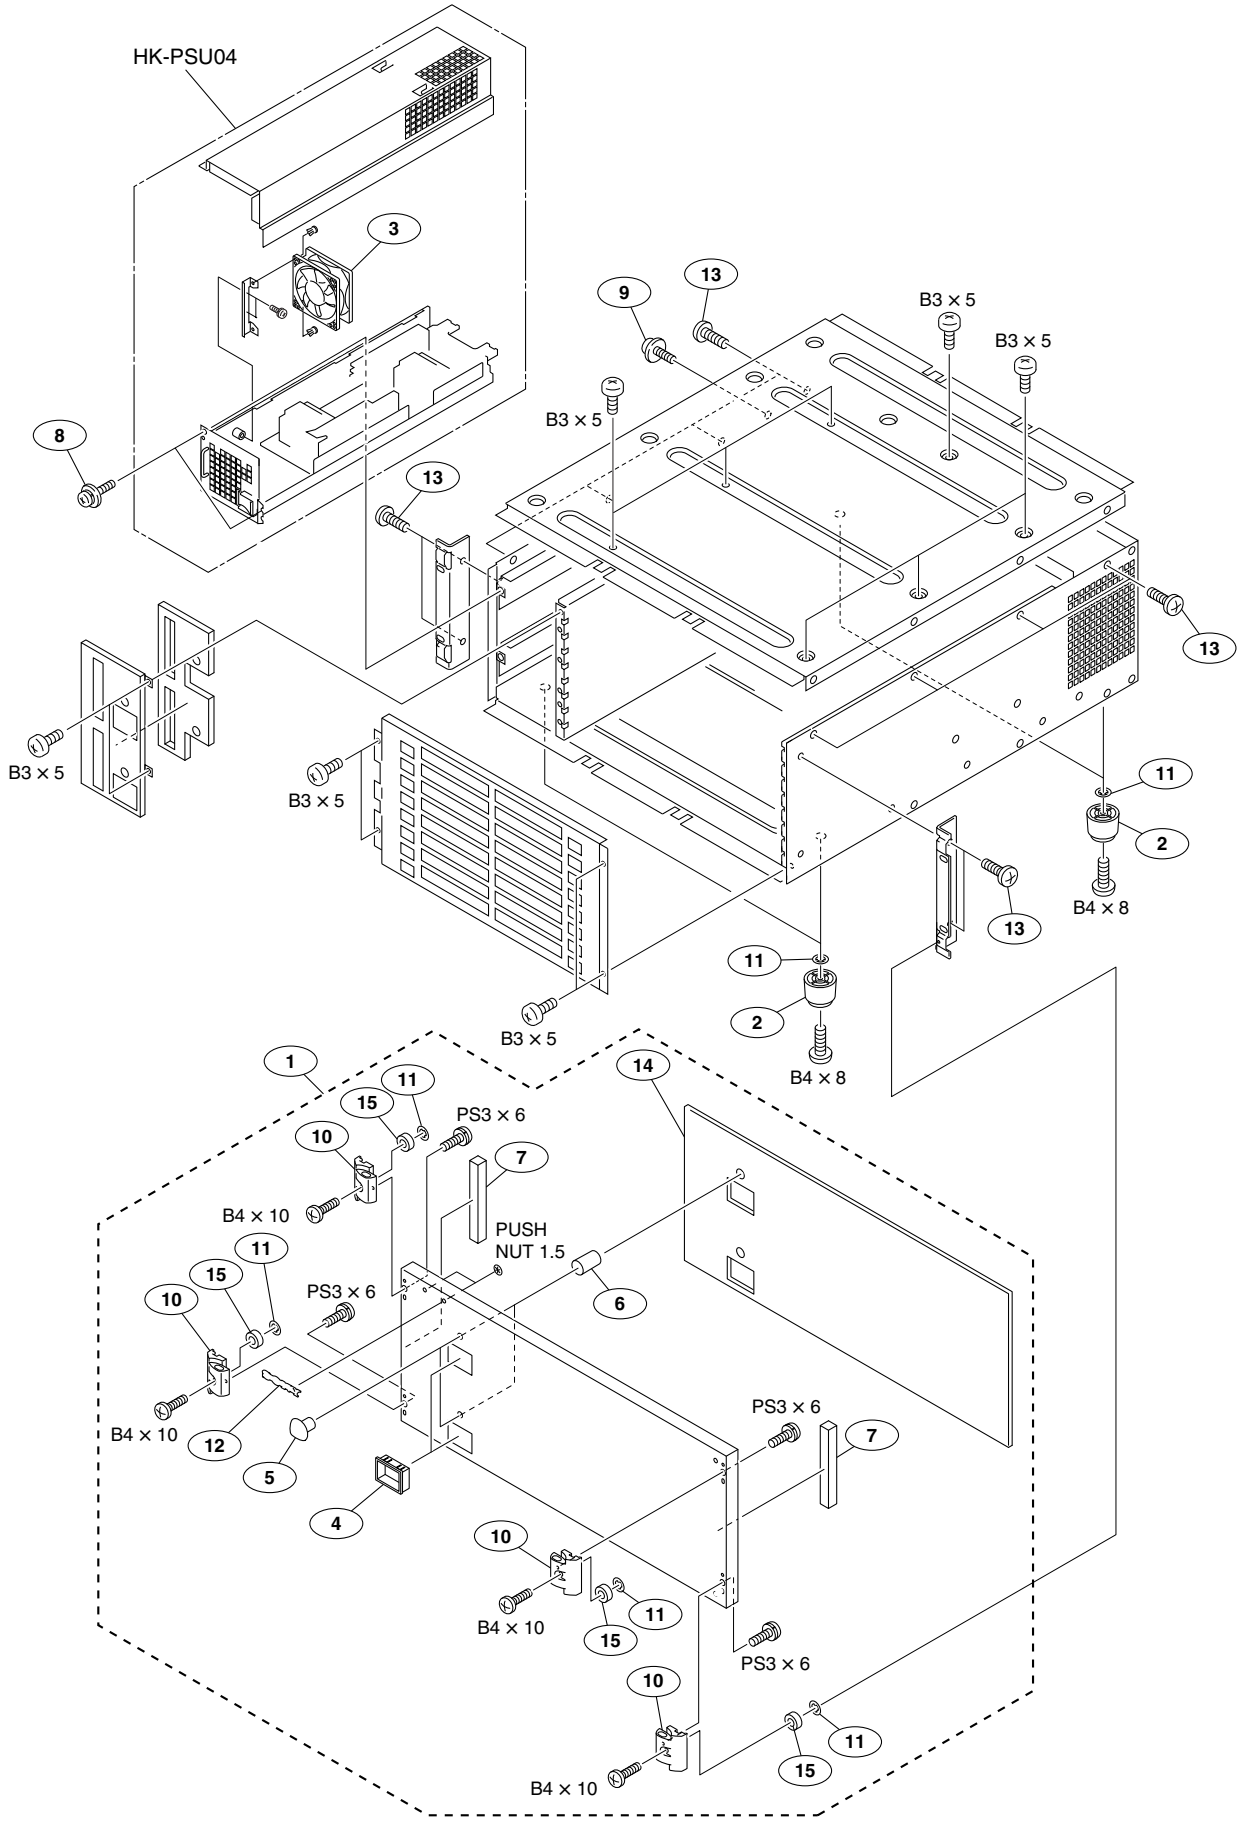

No.	Part No.	SP	Description
1	A-1564-847-A	s	DOOR ASSY,FRONT
2	X-3605-751-1	s	FOOT ASSY
3	1-698-841-11	s	FAN, DC
4	3-189-361-01	o	COVER, SW
5	3-193-264-01	o	ACRYLIC, PW
6	3-200-188-02	s	FRAME, OUTER
7	3-201-420-41	s	TITE (5X5), SHIELD
8	3-624-821-01	s	+PSW3X6(CU,NI)
9	3-624-822-01	s	+PSW3X8(CU,NI)
10	3-624-859-03	s	BRACKET, PANEL
11	3-650-537-01	s	WASHER
12	3-718-322-02	s	EMBLEM, SONY
13	3-733-690-01	s	+B 4X6 (CU,NI)
14	3-854-740-01	s	FILTER
15	3-994-237-01	s	SPACER
	7-624-200-01	s	NUT, PUSH 1.5
	7-682-546-03	s	SCREW +B 3X5
	7-682-561-09	s	SCREW +B 4X8
	7-682-562-04	s	SCREW +B 4X10
	7-682-647-01	s	SCREW +PS 3X6


Fan Assembly

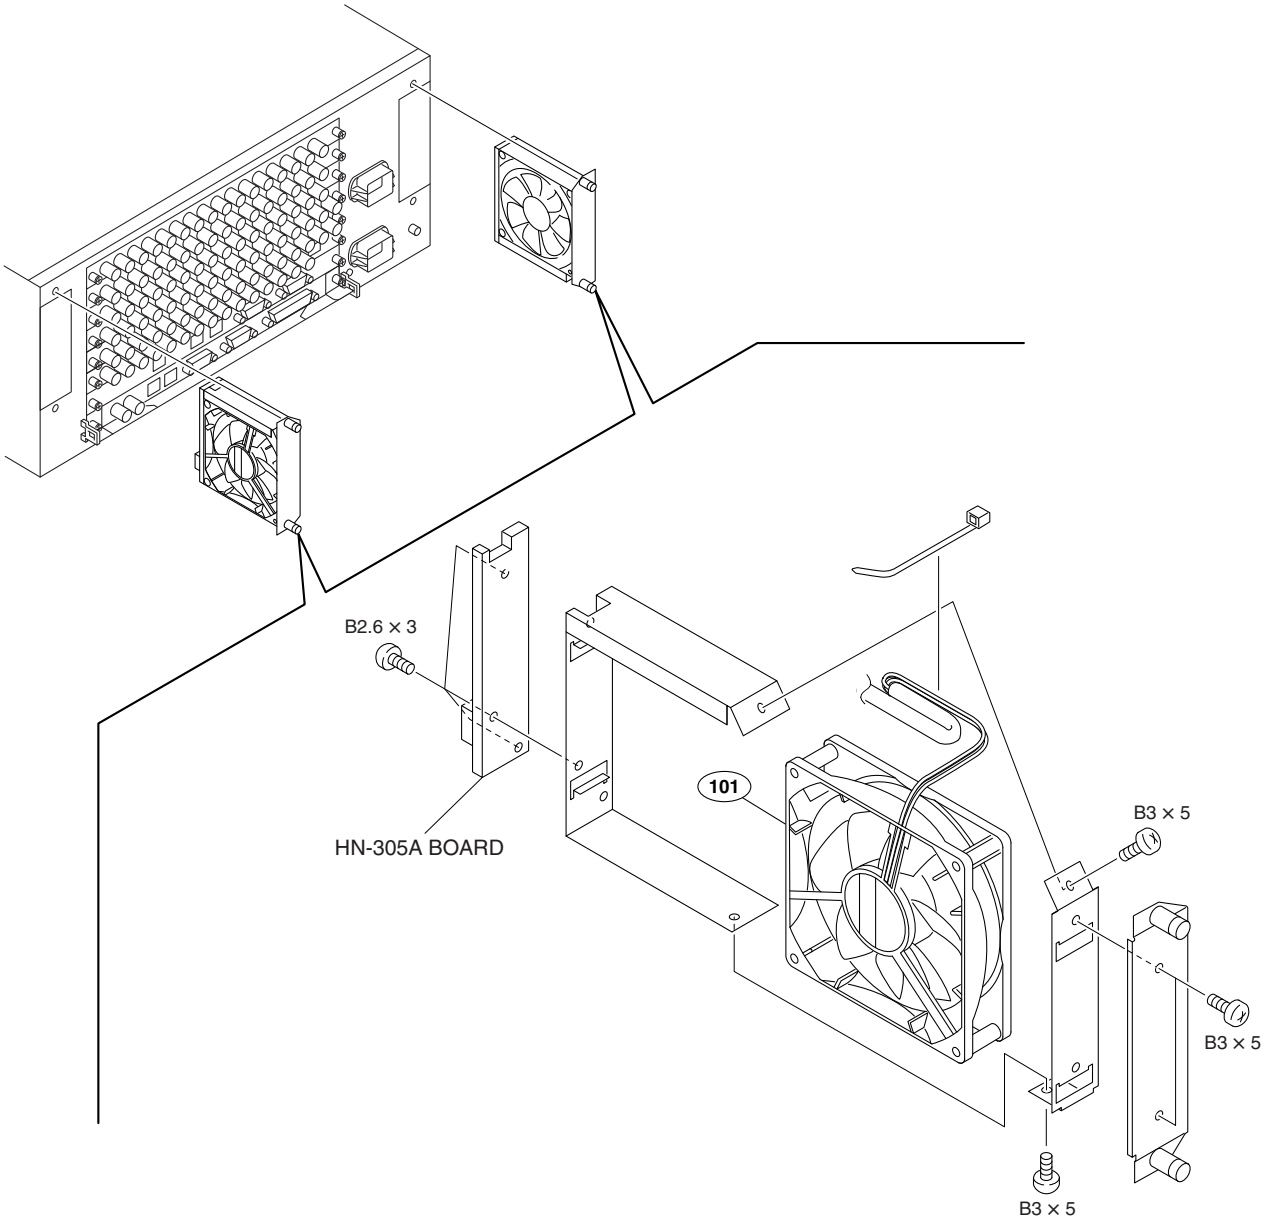

No. Part No. SP Description


101 ⚠ 1-787-030-21 s FAN, DC (92 SQUARE)

7-621-775-08 s SCREW +B 2.6X3
7-682-546-03 s SCREW +B 3X5

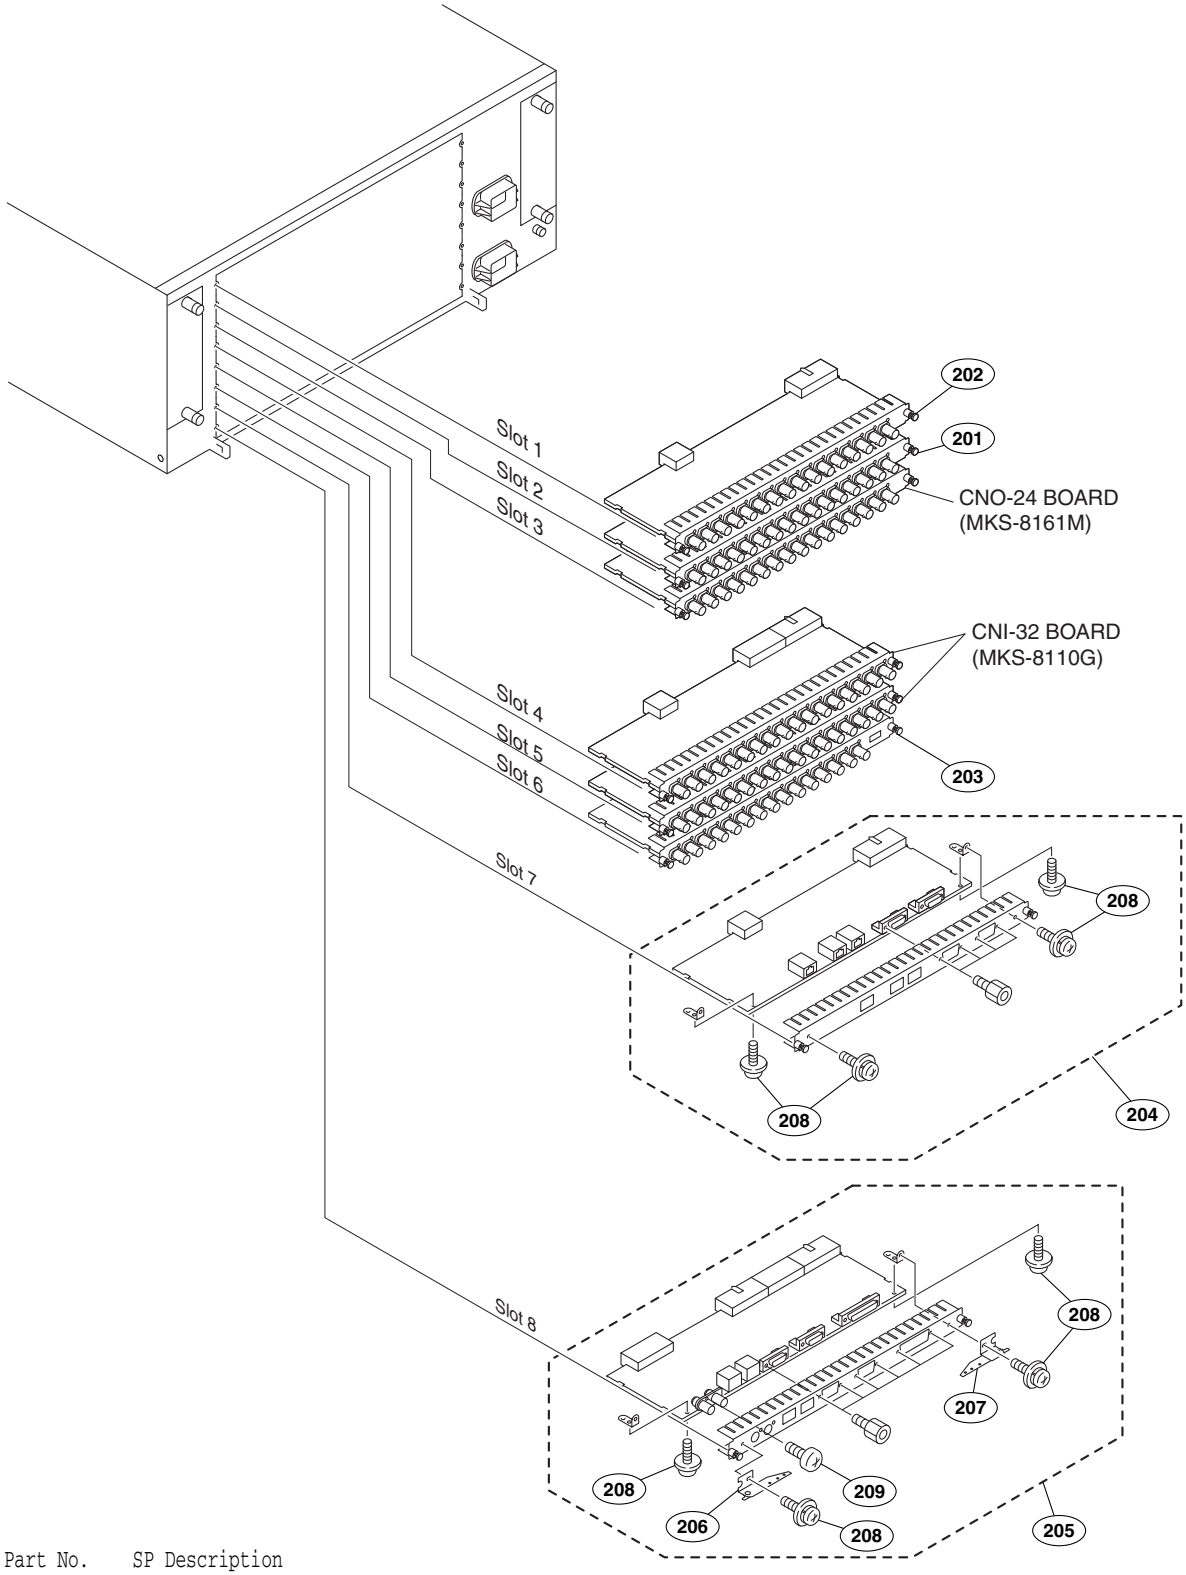


No.	Part No.	SP	Description
201	A-1738-460-A	s	MOUNTED CIRCUIT BOARD, CNO-35
202	A-1738-461-A	s	MOUNTED CIRCUIT BOARD, CNO-36
203	A-1547-172-A	s	MOUNTED CIRCUIT BOARD, CNI-35
204	A-1547-173-A	s	MOUNTED CIRCUIT BOARD, CN-3141
205	A-1551-022-A	s	MOUNTED CIRCUIT BOARD, CN-3147
206	X-3608-350-6	s	PC BOARD LEVER ASSY(L)
207	X-3608-351-5	s	PC BOARD LEVER ASSY(R)
208	3-624-821-01	s	+PSW3X6(CU,NI)
209	3-637-901-02	s	SCREW M2.6X5

Rear Block 2

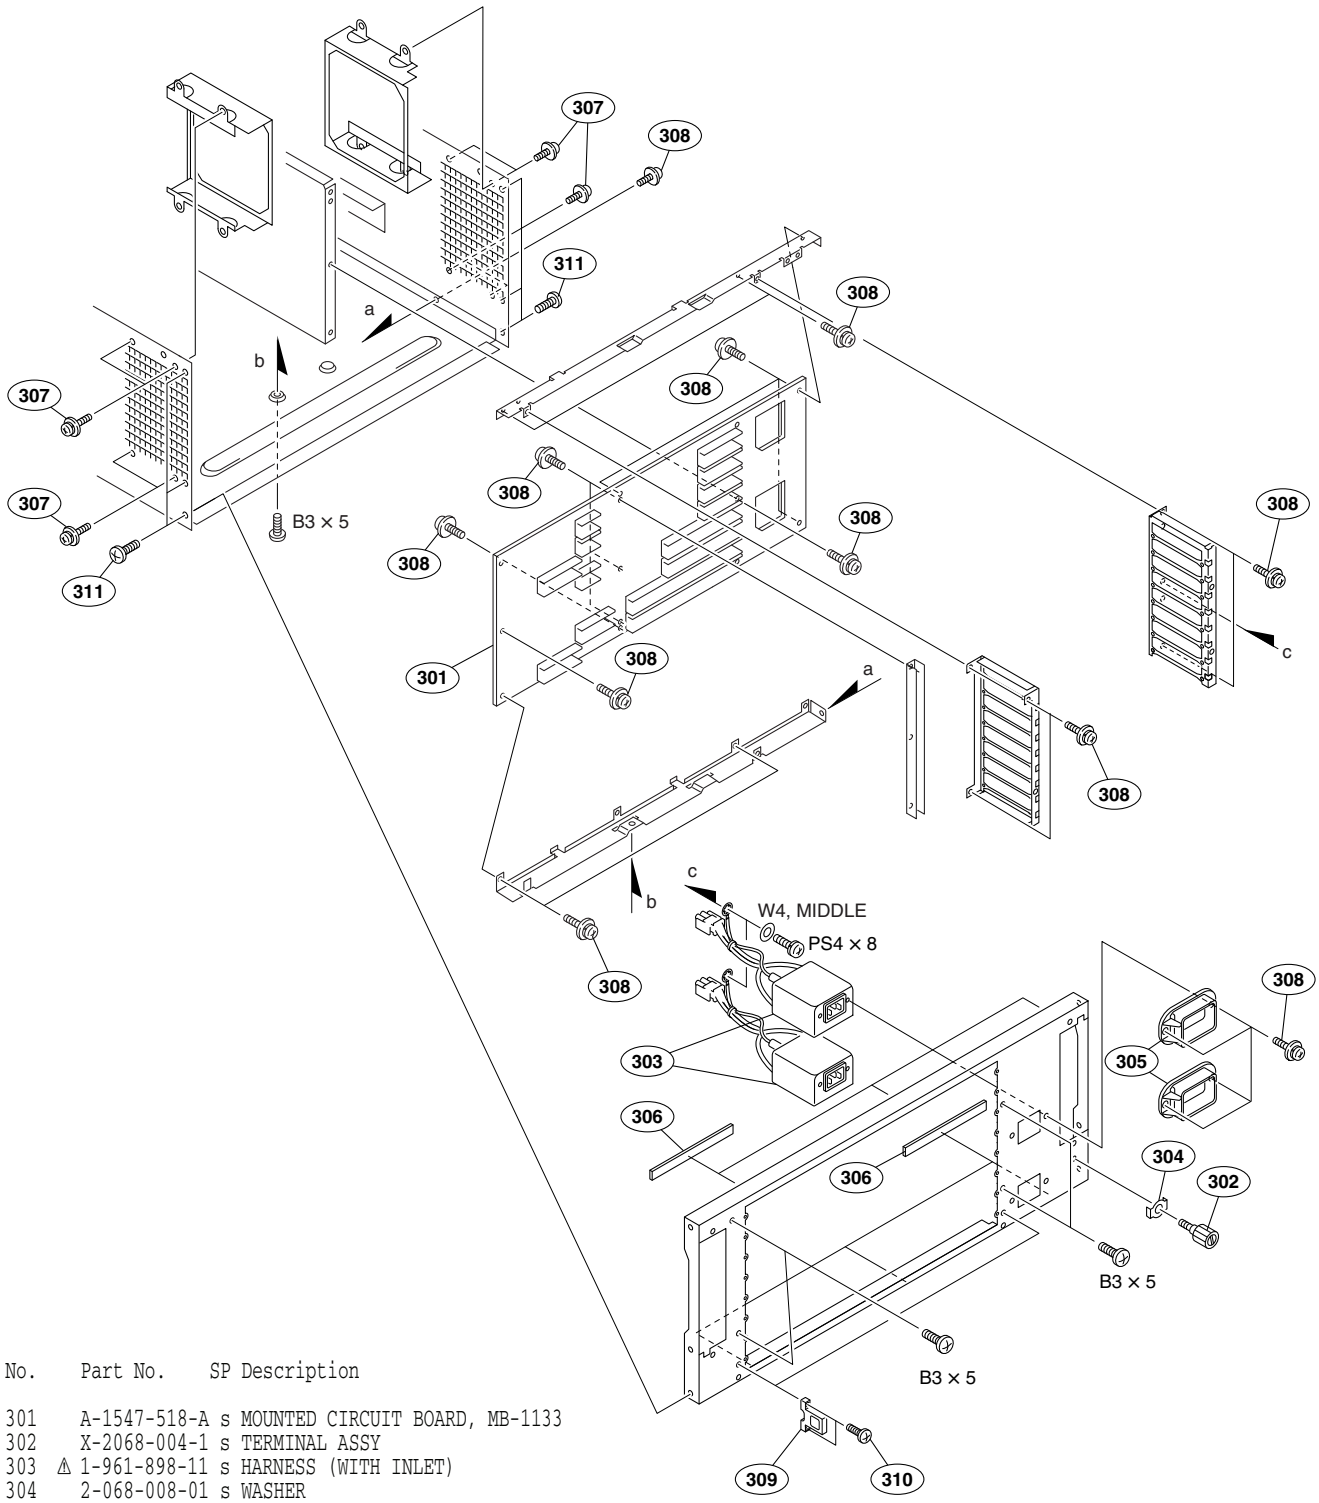


No.	Part No.	SP	Description
301	A-1547-518-A	s	MOUNTED CIRCUIT BOARD, MB-1133
302	X-2068-004-1	s	TERMINAL ASSY
303	⚠ 1-961-898-11	s	HARNESS (WITH INLET)
304	2-068-008-01	s	WASHER
305	2-990-241-02	s	HOLDER (A), PLUG
306	3-201-420-41	s	TITE (5X5), SHIELD
307	3-624-821-01	s	+PSW3X6(CU,NI)
308	3-624-822-01	s	+PSW3X8(CU,NI)
309	3-639-784-02	o	BASE,PC BOARD LEVER
310	3-729-076-21	s	SCREW (+B) (2X6)
311	3-733-690-01	s	+B 4X6 (CU,NI)
	7-682-546-03	s	SCREW +B 3X5
	7-682-661-01	s	SCREW +PS 4X8
	7-688-004-11	o	W 4, MIDDLE

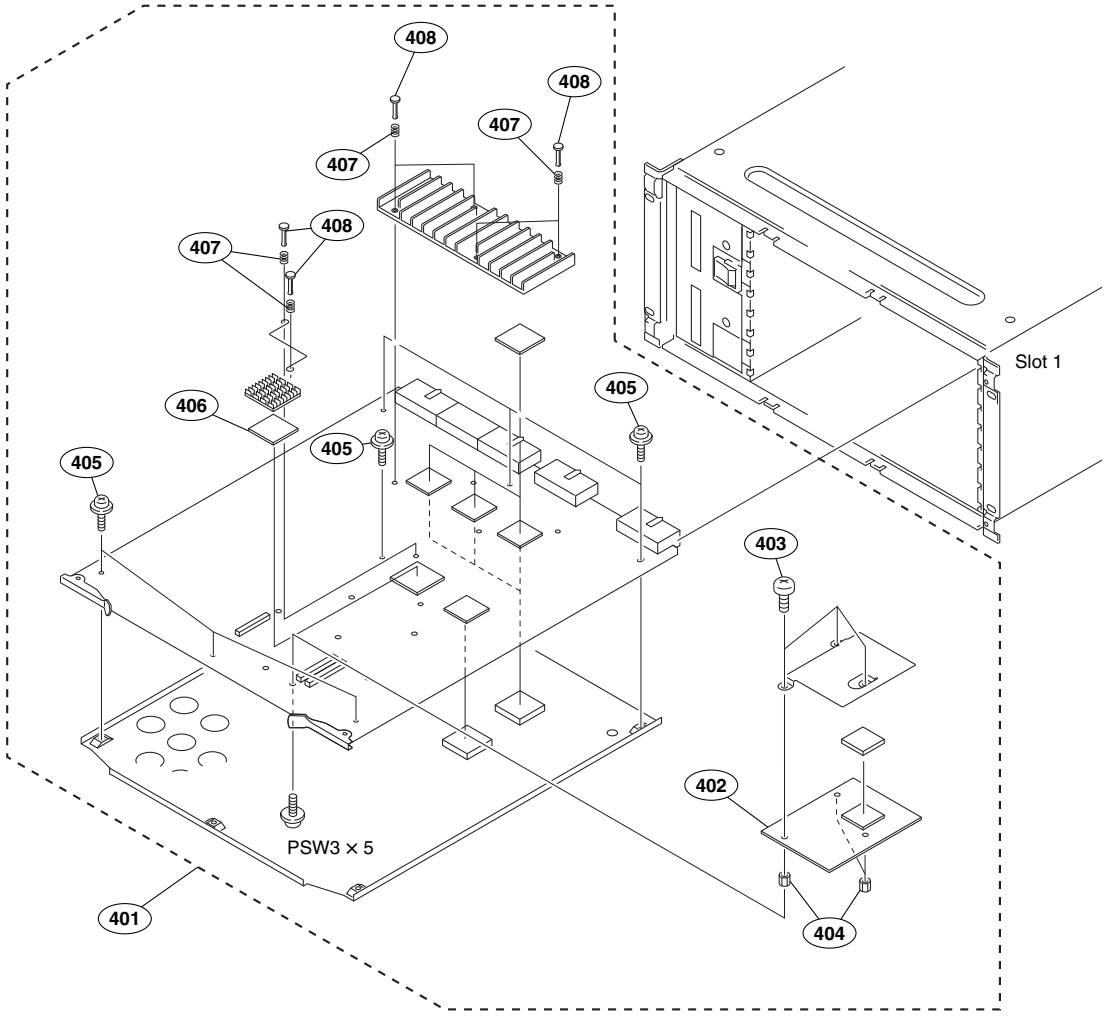


No.	Part No.	SP	Description
401	A-1547-164-A	s	MOUNTED CIRCUIT BOARD, OUT-33
402	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
403	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
404	3-636-891-01	o	SPACER
405	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
406	3-854-851-01	s	SHEET,RADIATION
407	4-143-557-01	s	SPRING, COMPRESSION
408	4-143-559-01	s	PIN, PUSH
	7-682-946-01	s	SCREW +PSW 3X5

XPT-29 Board

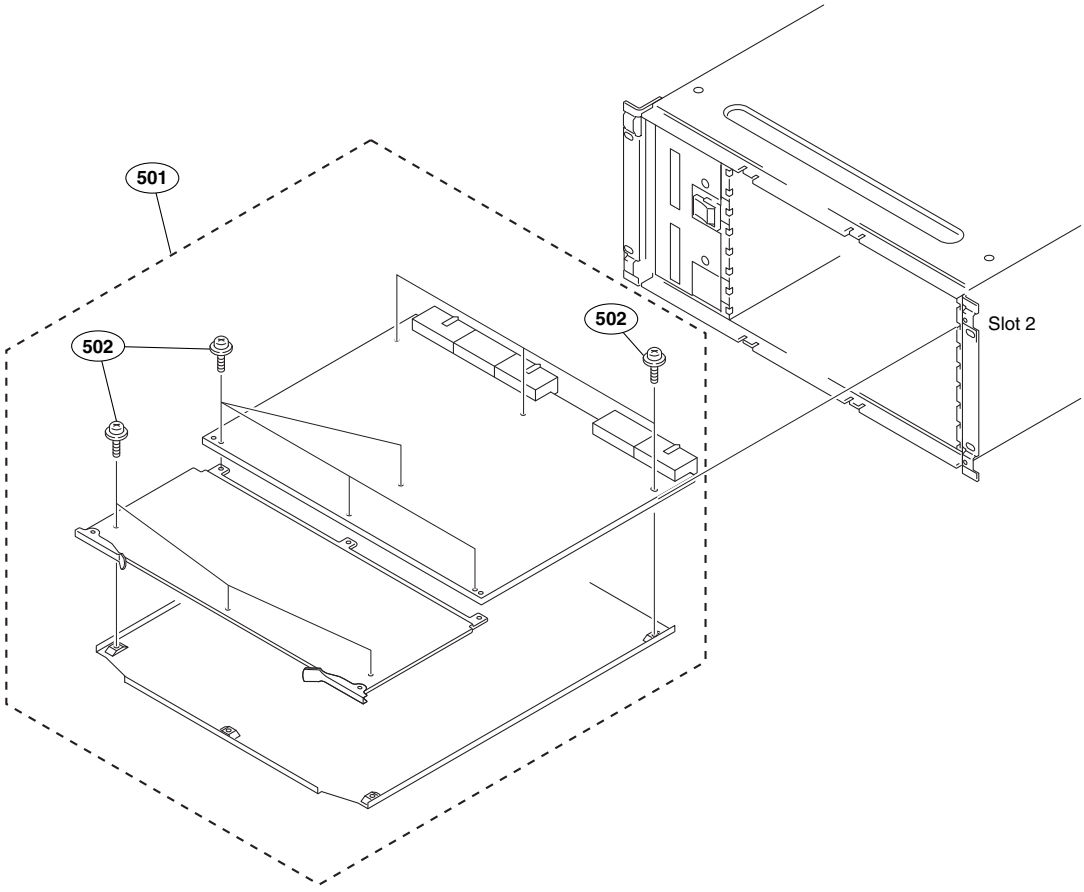


No.	Part No.	SP	Description
501	A-1217-386-A	s	MOUNTED CIRCUIT BOARD, XPT-29
502	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6

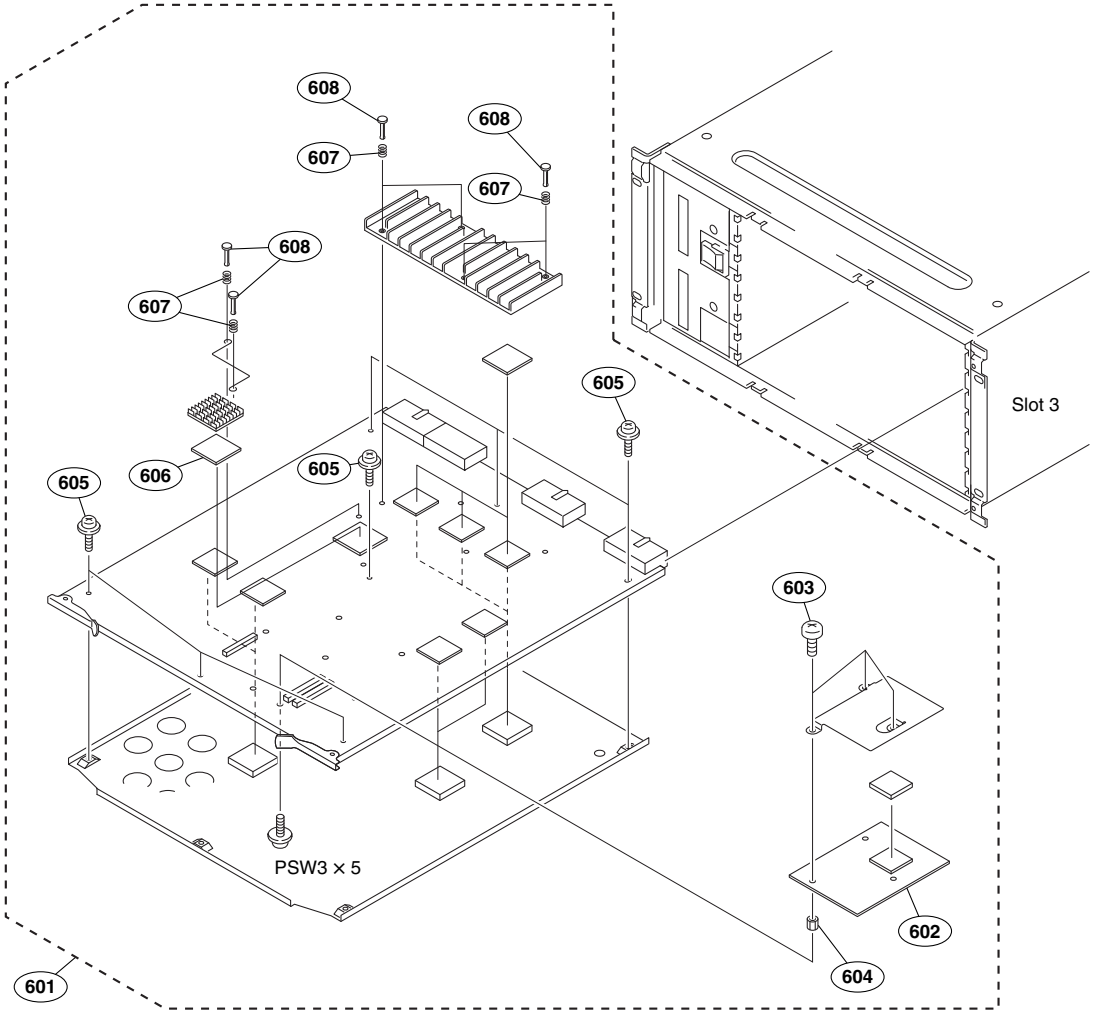


No.	Part No.	SP	Description
601	A-1547-166-A	s	MOUNTED CIRCUIT BOARD, MIX-52
602	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
603	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
604	3-636-891-01	o	SPACER
605	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
606	3-854-851-01	s	SHEET,RADIATION
607	4-143-557-01	s	SPRING, COMPRESSION
608	4-143-559-01	s	PIN, PUSH
	7-682-946-01	s	SCREW +PSW 3X5

DVP-49 Board (MKS-6470)

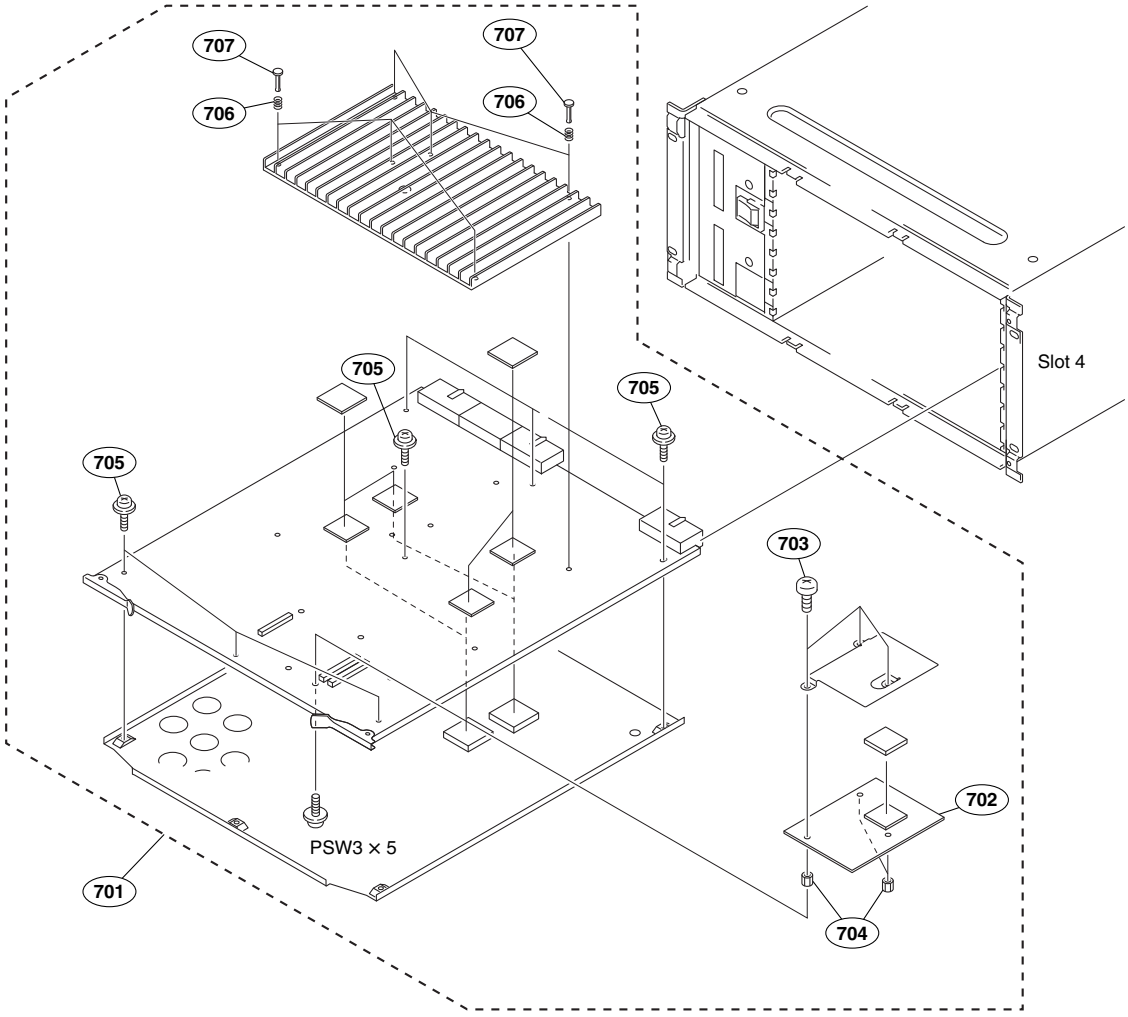


No.	Part No.	SP	Description
701	A-1547-168-A	s	MOUNTED CIRCUIT BOARD, DVP-49
702	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
703	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
704	3-636-891-01	o	SPACER
705	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
706	4-143-557-01	s	SPRING, COMPRESSION
707	4-143-559-01	s	PIN, PUSH
	7-682-946-01	s	SCREW +PSW 3X5

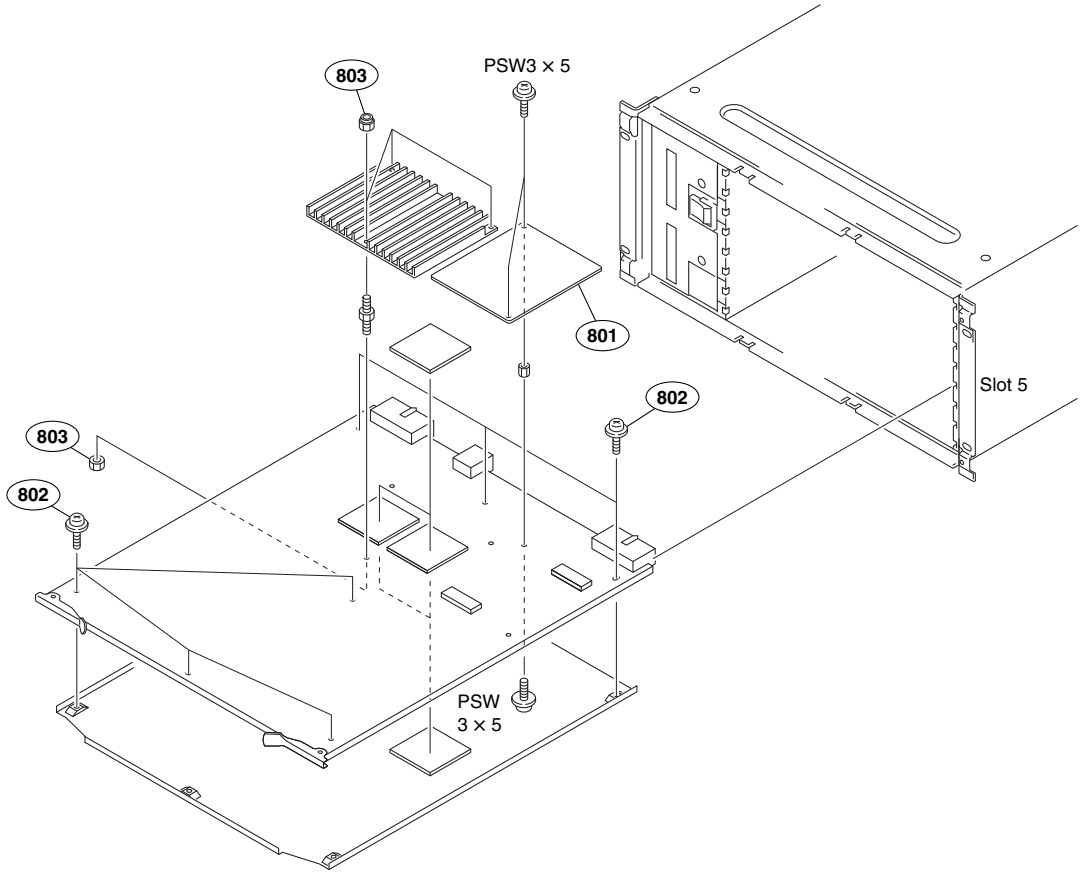


No.	Part No.	SP	Description
801	A-8328-403-A	s	MOUNTED CIRCUIT BOARD, SG-272
802	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
803	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
	7-682-946-01	s	SCREW +PSW 3X5

MY-114 Board (MKS-8442G)

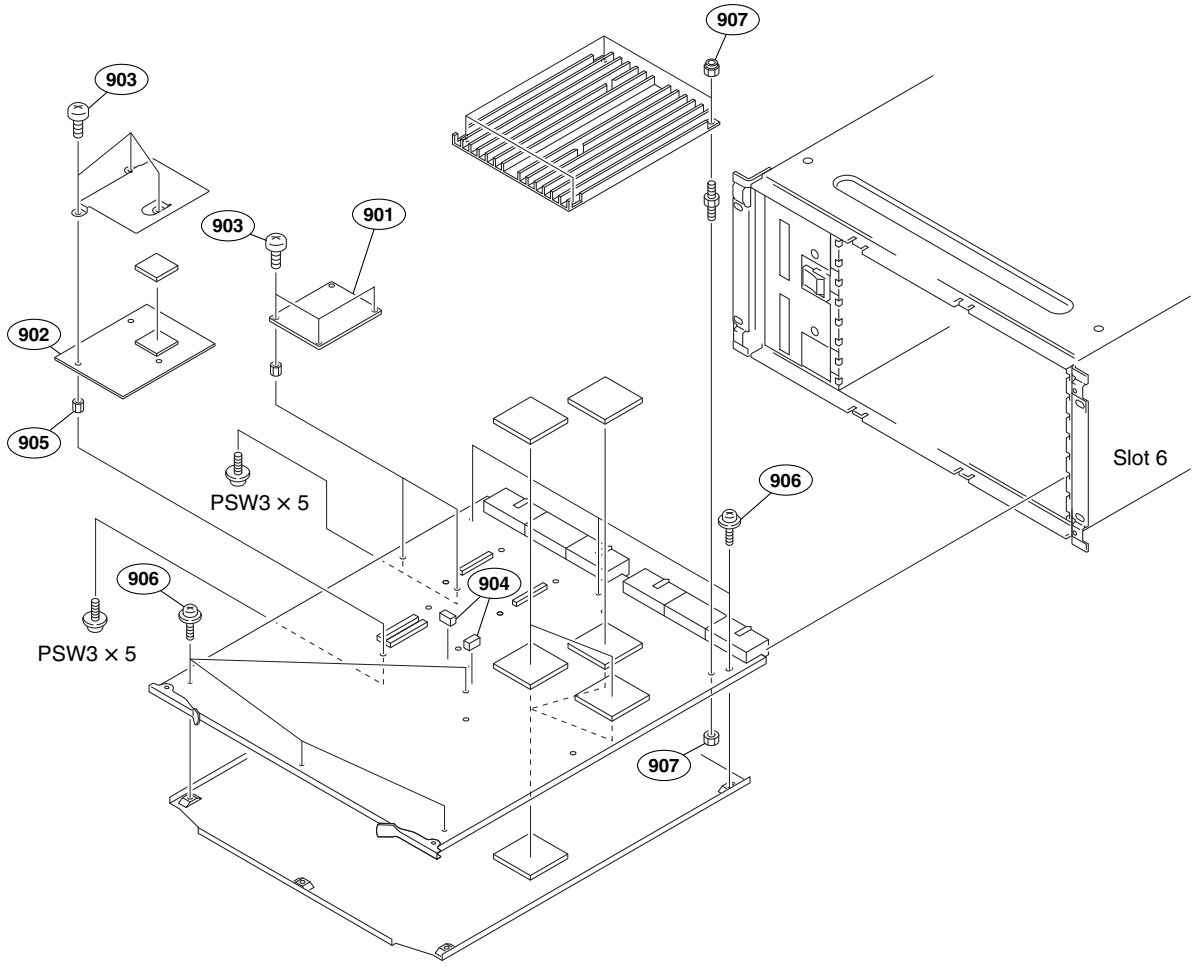

No.	Part No.	SP	Description
901	A-1558-544-A	s	MOUNTED CIRCUIT BOARD, IF-937
902	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
903	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
904	3-561-426-01	s	CUSHION
905	3-636-891-01	o	SPACER
906	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
907	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
	7-682-946-01	s	SCREW +PSW 3X5

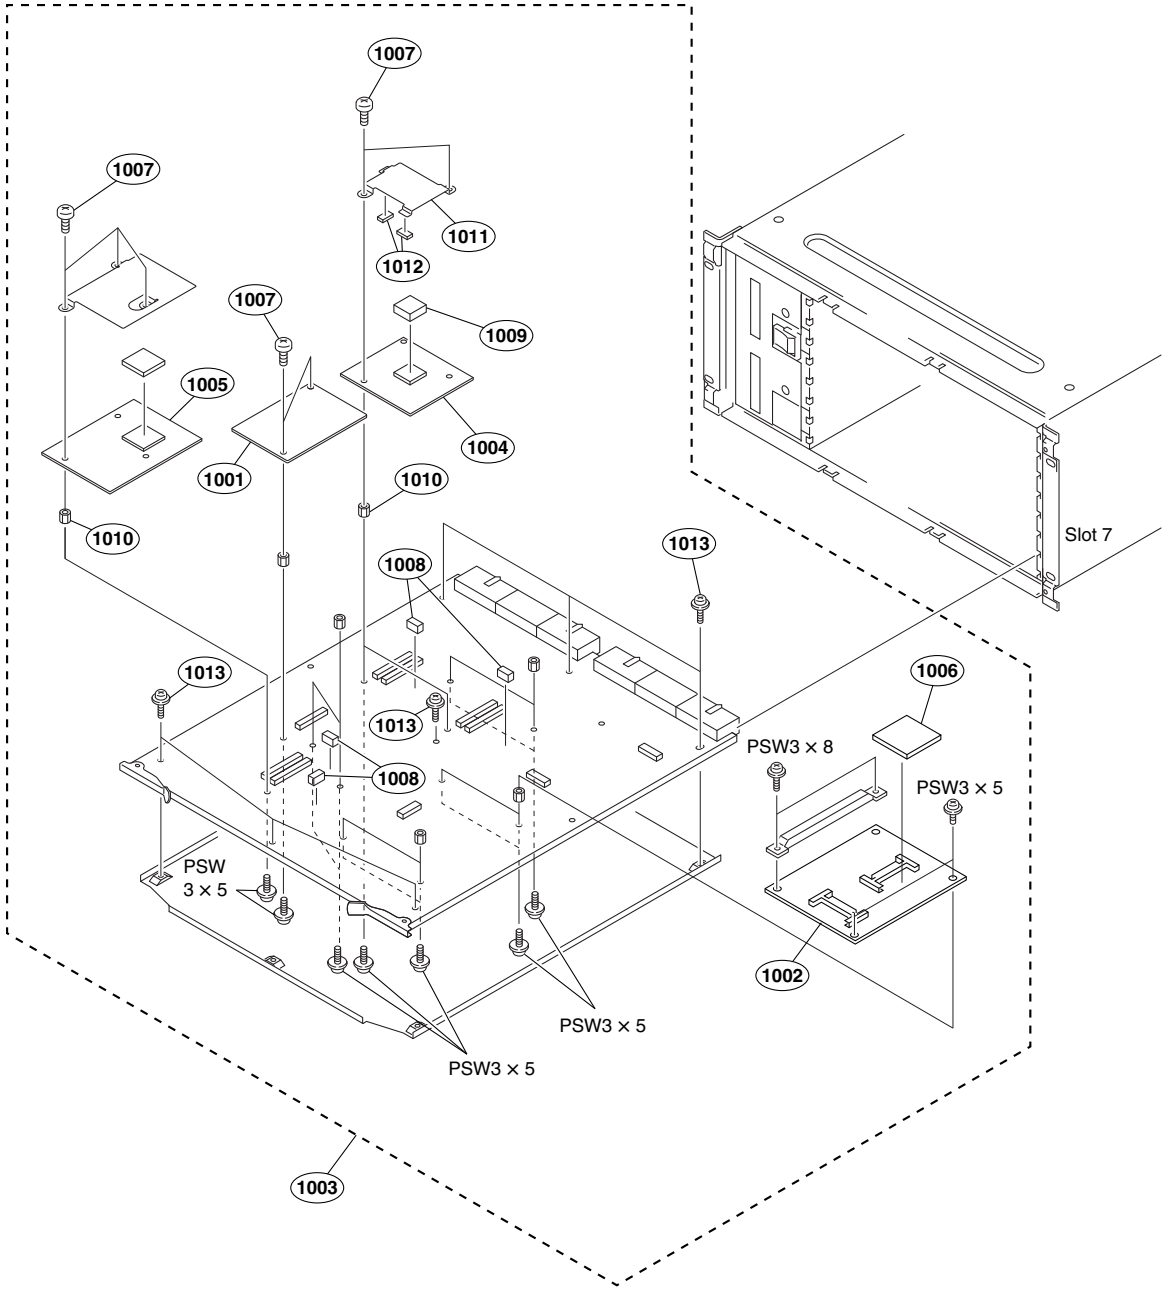

No. Part No. SP Description


1001 A-1276-367-A s MOUNTED CIRCUIT BOARD, SIO-26A
1002 A-1558-837-A s MOUNTED CIRCUIT BOARD, DIF-184
1003 A-1633-323-A s CA-54CFE ASSY
1004 1-761-434-13 s PC BOARD, (CPU-DK MODULE)
1005 1-789-288-12 s PC BOARD, (CPU-DT MODULE)

1006 1-840-096-11 s CARD, COMPACT FLASH (128M)
1007 3-370-475-01 s SCREW (NYLOCK +B 3X6)
1008 3-561-426-01 s CUSHION
1009 3-626-956-02 o SHEET1,HEAT CONDUCTION(SDI)
1010 3-636-891-01 o SPACER

1011 3-639-733-01 o BRACKET(K)
1012 3-639-734-01 o CUSHION
1013 3-703-249-02 s SCREW, S TIGHT, +PTTWH 3X6

7-682-946-01 s SCREW +PSW 3X5
7-682-948-01 s SCREW +PSW 3X8

CA-54C Board

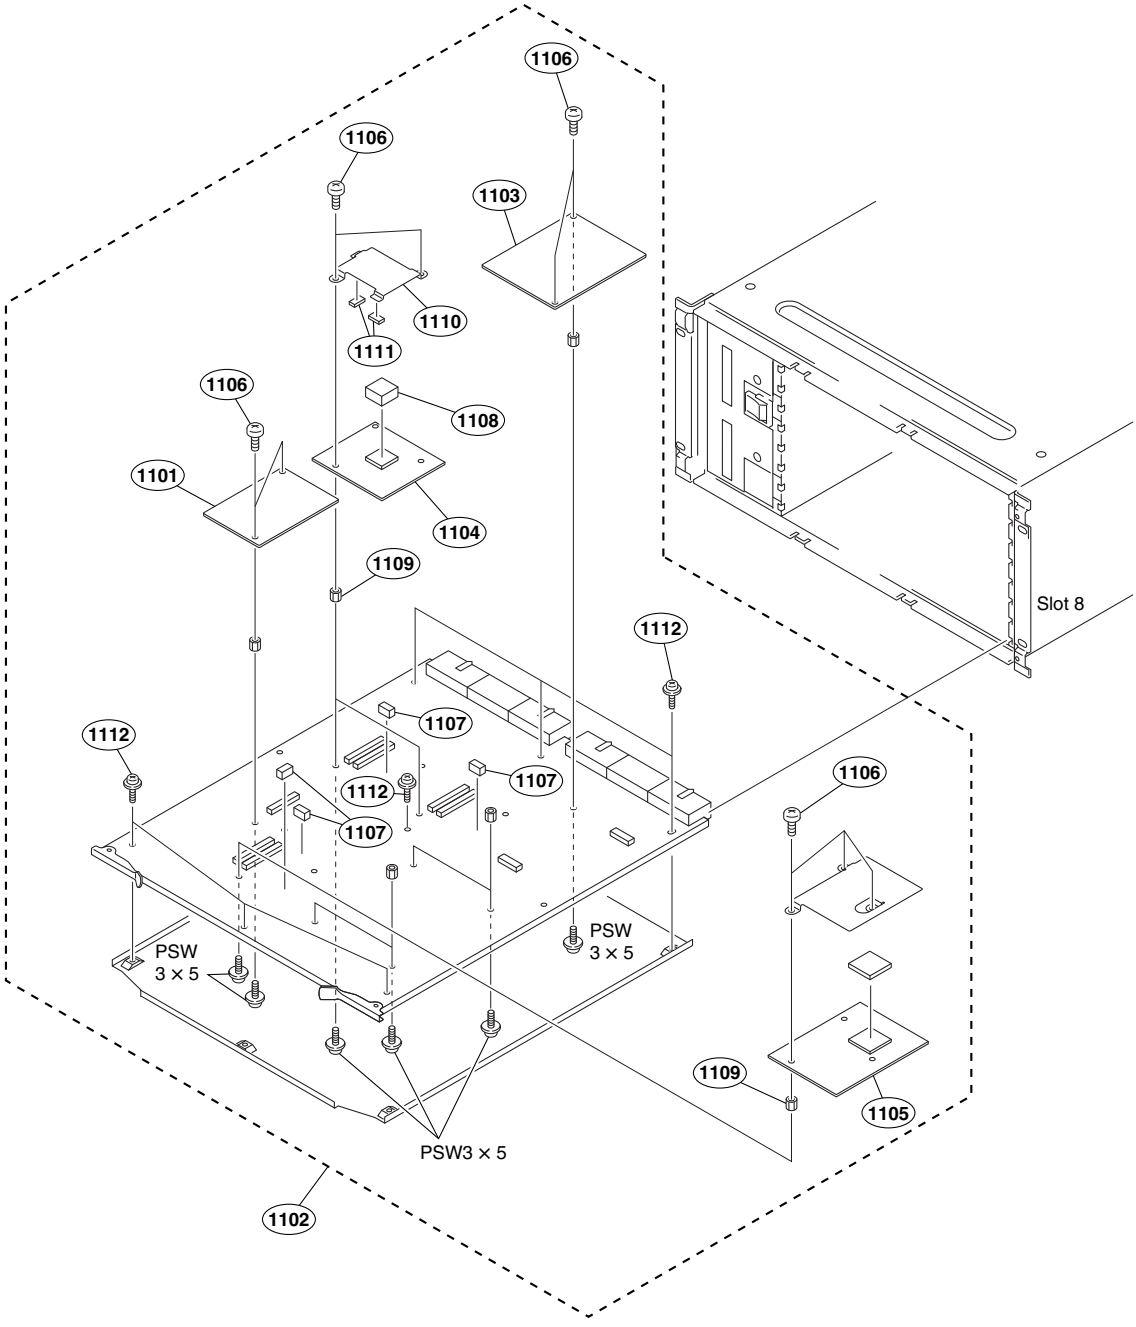

No.	Part No.	SP	Description
1101	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
1102	A-1557-059-A	s	CA-54C ASSY
1103	A-8328-403-A	s	MOUNTED CIRCUIT BOARD, SG-272
1104	1-761-434-13	s	PC BOARD, (CPU-DK MODULE)
1105	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
1106	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
1107	3-561-426-01	s	CUSHION
1108	3-626-956-02	o	SHEET1,HEAT CONDUCTION(SDI)
1109	3-636-891-01	o	SPACER
1110	3-639-733-01	o	BRACKET(K)
1111	3-639-734-01	o	CUSHION
1112	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
	7-682-946-01	s	SCREW +PSW 3X5

2-3. Electrical Parts List

CA-54C BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1557-059-A	s	CA-54C ASSY (WITH MOUNT)
1pc	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
1pc	A-8328-403-A	s	MOUNTED CIRCUIT BOARD, SG-272
2pcs	1-761-434-13	s	PC BOARD, (CPU-DK MODULE)
1pc	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
7pcs	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
2pcs	3-626-956-02	o	SHEET1,HEAT CONDUCTION(SDI)
7pcs	3-636-891-01	o	SPACER
2pcs	3-639-733-01	o	BRACKET(K)
4pcs	3-639-734-01	o	CUSHION
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
2pcs	7-626-300-54	s	SPRING PIN 3X6
19pcs	7-682-946-01	s	SCREW +PSW 3X5
4pcs	9-911-841-99	s	CUSHION, METER
C101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C104	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C105	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C106	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C107	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C108	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C109	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C110	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C111	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C112	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C113	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C114	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C115	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C116	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C117	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C118	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C119	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C120	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C121	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C122	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C123	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C124	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C125	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C126	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C127	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C128	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C129	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C130	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C131	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C132	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C133	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C134	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C135	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C136	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C137	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C138	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C141	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C142	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C201	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C202	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C203	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C204	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C205	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C206	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C207	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C208	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C209	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C210	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C211	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C212	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C213	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C214	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C215	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C217	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C219	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C220	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C221	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C222	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C223	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C224	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C225	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C226	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C227	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C228	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C229	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C230	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C231	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C232	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C233	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C234	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C235	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C236	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C237	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C238	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C239	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C240	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C241	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C242	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C243	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C244	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C245	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C246	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C247	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C248	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C249	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C250	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C251	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C252	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C253	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C254	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C255	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C256	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C257	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C258	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C260	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C261	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C262	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C263	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C264	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C265	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C266	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C267	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C268	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C269	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C270	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C271	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C272	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C273	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C274	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C275	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C276	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C277	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C278	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C279	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C280	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C281	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C282	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C283	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C284	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C285	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C286	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C287	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C301	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C302	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C303	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C304	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C305	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C306	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C307	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C308	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C309	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C310	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C311	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C312	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C313	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C314	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C315	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C316	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C317	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C318	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C319	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C320	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C321	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C322	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C323	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C324	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C325	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C326	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C327	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C328	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C329	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C330	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C331	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C332	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C333	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C334	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C335	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C336	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C337	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C338	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C339	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C340	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C341	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C342	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C343	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C344	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C345	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C346	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C347	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C348	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C349	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C350	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C351	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C352	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C353	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C354	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C355	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C356	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C357	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C358	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C359	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C360	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C361	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C362	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C363	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C364	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C365	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C366	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C367	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C368	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C401	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C403	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C404	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C405	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C406	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C407	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C408	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C410	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C411	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C412	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C413	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C414	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C415	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C416	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C417	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C418	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C419	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C420	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C421	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C422	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C423	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C424	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C425	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C426	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C427	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C428	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C429	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C430	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C431	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C432	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C433	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C434	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C435	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C436	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C437	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C438	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C439	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C440	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C441	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C442	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C443	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C444	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C445	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C446	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C447	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C448	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C449	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C450	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C451	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C452	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C453	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C454	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C455	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C456	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C457	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C458	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C459	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C460	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C461	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C462	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C463	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C464	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C465	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C466	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C467	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C468	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C469	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C470	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C471	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C472	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C473	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C474	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C475	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C476	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C477	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C478	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C479	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C480	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C481	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C482	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C483	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C484	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C485	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C486	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C487	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C488	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C489	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C501	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C502	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C503	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C504	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C505	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C506	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C507	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C508	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C509	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C510	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C511	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C512	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C513	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C514	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C515	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C516	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C517	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C518	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C519	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C520	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C521	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C522	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C523	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C524	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C525	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C526	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C527	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C528	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C529	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C601	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C602	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C603	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C604	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C605	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C606	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C607	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C608	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C611	1-165-585-21	s	CAP, CHIP ELECT 47MF
C612	1-165-585-21	s	CAP, CHIP ELECT 47MF
C613	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C614	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C615	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C616	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C617	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C618	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C619	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C620	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C621	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C622	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C623	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C624	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C625	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C626	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C627	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C628	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C629	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C630	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C631	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C632	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C633	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C634	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C635	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C636	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C637	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C638	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C639	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C640	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C641	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C642	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C643	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C644	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C645	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C646	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C647	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C648	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C701	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C702	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C703	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C704	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C705	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C706	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C707	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C708	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C709	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C710	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C711	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C712	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C713	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C714	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C715	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C716	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C717	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C718	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C719	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C720	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C725	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C726	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C727	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C728	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C729	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C730	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C731	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C732	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C733	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C734	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C735	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C736	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C737	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C738	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C739	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C740	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C741	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C742	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C743	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C744	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C745	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C746	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C747	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C748	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C749	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C750	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C751	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C752	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C753	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C754	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C755	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C756	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C757	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C758	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C759	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C760	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C761	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C762	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C763	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C764	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C803	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C804	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C805	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C806	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C807	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C808	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C809	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C810	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C811	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C812	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C813	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C814	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C816	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C817	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C818	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C819	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C820	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C821	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C824	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C825	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C826	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C827	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C831	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C832	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C833	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C834	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C835	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C836	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C838	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C839	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C840	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C841	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C842	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C843	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C844	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C845	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C846	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C847	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C848	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C849	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C850	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C851	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C852	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C853	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C854	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C855	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C856	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C857	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C858	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C859	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C860	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C861	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C862	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C863	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C864	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C865	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C866	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C867	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C868	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C869	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C870	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C871	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C872	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C873	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C874	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C875	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C876	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C877	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C878	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C879	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C880	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C881	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C882	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C883	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C884	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C885	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C886	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C887	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C888	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C889	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C890	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C891	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C892	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C893	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C894	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C895	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C896	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C897	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C898	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C899	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C900	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C901	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C902	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C903	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C904	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C905	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C906	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C907	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C908	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C909	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C910	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C911	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C912	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C913	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C914	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C915	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C916	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C917	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C918	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C919	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C920	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C921	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C922	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C923	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C924	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C925	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C926	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C927	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C928	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C929	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C930	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C931	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C932	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C933	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C934	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C935	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C936	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C937	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C938	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C939	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C940	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C941	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C942	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C943	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C944	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C945	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C950	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C951	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C952	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C953	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C954	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C955	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C956	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C957	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C958	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C959	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C960	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C961	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C962	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C963	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C964	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C965	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C966	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C967	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C968	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C969	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C970	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C971	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C972	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C973	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C974	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C975	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C976	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C977	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C980	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C981	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C982	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C983	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C984	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C985	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C986	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C987	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C988	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C989	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C990	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C991	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C992	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C993	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C994	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C995	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1001	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1002	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1003	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1004	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1005	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1006	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1007	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1008	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1009	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1010	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1011	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1012	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1013	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1014	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1015	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1016	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1017	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1018	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1019	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1020	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1021	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1022	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1023	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1104	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C1105	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1107	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1108	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1109	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1110	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1111	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1112	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1113	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1114	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1115	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1116	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1117	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1118	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1119	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1120	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1121	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1122	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1123	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1124	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1125	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1126	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1127	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1128	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1131	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1132	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1133	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1134	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1135	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1136	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1137	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1138	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1139	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1140	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1141	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1142	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1143	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1144	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1145	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1146	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1201	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1202	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1203	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1204	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1205	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1206	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1207	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1208	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1209	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1210	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1211	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1212	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1213	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1214	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1215	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1217	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1219	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1220	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1221	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1222	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1223	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1301	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1302	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1304	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1305	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C1307	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1308	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1309	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1310	1-100-118-21	s	CAP, ELECT 82MF (8X7)
C1311	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1312	1-165-585-21	s	CAP, CHIP ELECT 47MF
C1313	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C1314	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1315	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1316	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1317	1-128-993-21	s	CAP, ELECT 22MF (4.3X5.5)
C1318	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1319	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C1320	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1322	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C1323	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1324	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1401	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1403	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1404	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1405	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1406	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1407	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1408	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1410	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1411	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1412	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1413	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1414	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1415	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1416	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1417	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1418	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1419	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1420	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1421	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1422	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1423	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1424	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1425	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1426	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1427	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1428	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1429	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1430	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1431	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1432	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1501	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1502	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1503	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1504	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1601	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1602	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1603	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1604	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1605	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1701	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1702	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1703	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1704	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN101	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN103	1-564-013-11	o	PIN, CONNECTOR 3P
CN401	1-779-048-12	s	CONNECTOR, SQUARE TYPE (1394)
CN501	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN503	1-564-013-11	o	PIN, CONNECTOR 3P
CN701	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN703	1-564-013-11	o	PIN, CONNECTOR 3P
CN801	1-785-552-21	o	CONNECTOR, BOARD TO BOARD 80P
CN901	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN902	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN1003	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-024-83	s	DIODE 1SS301-TE85L
D2	8-719-072-83	s	DIODE MBRS340T3
D3	8-719-072-83	s	DIODE MBRS340T3
D4	8-719-074-31	s	DIODE CL-196YG-CD-T
D5	8-719-074-31	s	DIODE CL-196YG-CD-T
D6	8-719-024-83	s	DIODE 1SS301-TE85L
D101	8-719-074-31	s	DIODE CL-196YG-CD-T
D102	8-719-074-31	s	DIODE CL-196YG-CD-T
D103	8-719-074-31	s	DIODE CL-196YG-CD-T
D104	8-719-074-31	s	DIODE CL-196YG-CD-T
D105	8-719-074-31	s	DIODE CL-196YG-CD-T
D106	8-719-074-31	s	DIODE CL-196YG-CD-T
D107	8-719-074-31	s	DIODE CL-196YG-CD-T
D108	8-719-074-31	s	DIODE CL-196YG-CD-T
D109	8-719-074-31	s	DIODE CL-196YG-CD-T
D110	8-719-074-31	s	DIODE CL-196YG-CD-T
D111	8-719-074-31	s	DIODE CL-196YG-CD-T
D112	8-719-074-31	s	DIODE CL-196YG-CD-T
D113	8-719-074-31	s	DIODE CL-196YG-CD-T
D114	8-719-074-31	s	DIODE CL-196YG-CD-T
D115	8-719-074-31	s	DIODE CL-196YG-CD-T
D116	8-719-074-31	s	DIODE CL-196YG-CD-T
D117	8-719-074-31	s	DIODE CL-196YG-CD-T
D118	8-719-074-31	s	DIODE CL-196YG-CD-T
D119	8-719-074-31	s	DIODE CL-196YG-CD-T
D120	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-016-87	s	DIODE 02DZ2.2-TPH3
D302	8-719-056-65	s	DIODE 1SS372-TE85L
D401	8-719-820-42	s	DIODE 1SS302-TE85L
D402	8-719-820-42	s	DIODE 1SS302-TE85L
D403	8-719-820-42	s	DIODE 1SS302-TE85L
D404	8-719-820-42	s	DIODE 1SS302-TE85L
D405	8-719-820-42	s	DIODE 1SS302-TE85L
D406	8-719-820-42	s	DIODE 1SS302-TE85L
D407	8-719-820-42	s	DIODE 1SS302-TE85L
D408	8-719-820-42	s	DIODE 1SS302-TE85L
D409	8-719-077-09	s	DIODE CL-196HR-CD-T
D410	8-719-077-09	s	DIODE CL-196HR-CD-T
D411	8-719-820-42	s	DIODE 1SS302-TE85L
D412	8-719-820-42	s	DIODE 1SS302-TE85L
D413	8-719-820-42	s	DIODE 1SS302-TE85L
D414	8-719-820-42	s	DIODE 1SS302-TE85L
D415	8-719-820-42	s	DIODE 1SS302-TE85L
D416	8-719-820-42	s	DIODE 1SS302-TE85L
D417	8-719-820-42	s	DIODE 1SS302-TE85L

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D418	8-719-820-42	s	DIODE 1SS302-TE85L
D501	8-719-820-42	s	DIODE 1SS302-TE85L
D502	8-719-820-42	s	DIODE 1SS302-TE85L
D503	8-719-820-42	s	DIODE 1SS302-TE85L
D504	8-719-820-42	s	DIODE 1SS302-TE85L
D505	8-719-820-42	s	DIODE 1SS302-TE85L
D506	8-719-820-42	s	DIODE 1SS302-TE85L
D507	8-719-820-42	s	DIODE 1SS302-TE85L
D508	8-719-820-42	s	DIODE 1SS302-TE85L
D509	8-719-820-42	s	DIODE 1SS302-TE85L
D510	8-719-820-42	s	DIODE 1SS302-TE85L
D511	8-719-820-42	s	DIODE 1SS302-TE85L
D512	8-719-820-42	s	DIODE 1SS302-TE85L
D513	8-719-024-83	s	DIODE 1SS301-TE85L
D514	8-719-024-83	s	DIODE 1SS301-TE85L
D515	8-719-024-83	s	DIODE 1SS301-TE85L
D516	8-719-024-83	s	DIODE 1SS301-TE85L
D517	8-719-024-83	s	DIODE 1SS301-TE85L
D518	8-719-024-83	s	DIODE 1SS301-TE85L
D519	8-719-820-42	s	DIODE 1SS302-TE85L
D520	8-719-820-42	s	DIODE 1SS302-TE85L
D521	8-719-820-42	s	DIODE 1SS302-TE85L
D522	8-719-820-42	s	DIODE 1SS302-TE85L
D523	8-719-820-42	s	DIODE 1SS302-TE85L
D524	8-719-820-42	s	DIODE 1SS302-TE85L
D525	8-719-024-83	s	DIODE 1SS301-TE85L
D526	8-719-024-83	s	DIODE 1SS301-TE85L
D527	8-719-024-83	s	DIODE 1SS301-TE85L
D601	8-719-074-31	s	DIODE CL-196YG-CD-T
D602	8-719-074-31	s	DIODE CL-196YG-CD-T
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-074-31	s	DIODE CL-196YG-CD-T
D903	8-719-074-31	s	DIODE CL-196YG-CD-T
D904	8-719-074-31	s	DIODE CL-196YG-CD-T
D905	8-719-074-31	s	DIODE CL-196YG-CD-T
D906	8-719-074-31	s	DIODE CL-196YG-CD-T
D907	8-719-074-31	s	DIODE CL-196YG-CD-T
D908	8-719-074-31	s	DIODE CL-196YG-CD-T
D909	8-719-074-31	s	DIODE CL-196YG-CD-T
D910	8-719-074-31	s	DIODE CL-196YG-CD-T
D911	8-719-074-31	s	DIODE CL-196YG-CD-T
D912	8-719-074-31	s	DIODE CL-196YG-CD-T
D913	8-719-074-31	s	DIODE CL-196YG-CD-T
D914	8-719-074-31	s	DIODE CL-196YG-CD-T
D915	8-719-074-31	s	DIODE CL-196YG-CD-T
D916	8-719-074-31	s	DIODE CL-196YG-CD-T
D917	8-719-074-31	s	DIODE CL-196YG-CD-T
D918	8-719-074-31	s	DIODE CL-196YG-CD-T
D919	8-719-074-31	s	DIODE CL-196YG-CD-T
D920	8-719-074-31	s	DIODE CL-196YG-CD-T
D1001	8-719-074-31	s	DIODE CL-196YG-CD-T
D1002	8-719-074-31	s	DIODE CL-196YG-CD-T
D1101	8-719-074-31	s	DIODE CL-196YG-CD-T
D1102	8-719-074-31	s	DIODE CL-196YG-CD-T
D1103	8-719-074-31	s	DIODE CL-196YG-CD-T
D1104	8-719-074-31	s	DIODE CL-196YG-CD-T
D1105	8-719-074-31	s	DIODE CL-196YG-CD-T
D1106	8-719-074-31	s	DIODE CL-196YG-CD-T
D1107	8-719-074-31	s	DIODE CL-196YG-CD-T

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1108	8-719-074-31	s	DIODE CL-196YG-CD-T
D1109	8-719-074-31	s	DIODE CL-196YG-CD-T
D1110	8-719-074-31	s	DIODE CL-196YG-CD-T
D1111	8-719-074-31	s	DIODE CL-196YG-CD-T
D1112	8-719-074-31	s	DIODE CL-196YG-CD-T
D1113	8-719-074-31	s	DIODE CL-196YG-CD-T
D1114	8-719-074-31	s	DIODE CL-196YG-CD-T
D1115	8-719-074-31	s	DIODE CL-196YG-CD-T
D1116	8-719-074-31	s	DIODE CL-196YG-CD-T
D1117	8-719-074-31	s	DIODE CL-196YG-CD-T
D1118	8-719-074-31	s	DIODE CL-196YG-CD-T
D1119	8-719-074-31	s	DIODE CL-196YG-CD-T
D1120	8-719-074-31	s	DIODE CL-196YG-CD-T
D1201	8-719-074-31	s	DIODE CL-196YG-CD-T
D1202	8-719-074-31	s	DIODE CL-196YG-CD-T
D1301	8-719-820-42	s	DIODE 1SS302-TE85L
D1302	8-719-048-17	s	DIODE MBRS130LT3
D1303	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB801	1-500-448-21	s	FERRITE, EMI (SMD) (3216)
FB802	1-500-448-21	s	FERRITE, EMI (SMD) (3216)
FB803	1-500-448-21	s	FERRITE, EMI (SMD) (3216)
FL801	1-239-899-21	s	FILTER, CHIP EMI
FL802	1-239-899-21	s	FILTER, CHIP EMI
FL803	1-239-899-21	s	FILTER, CHIP EMI
IC1	6-703-320-01	s	IC EPM7128AETC100-7N
IC4	6-710-018-01	s	IC CAT24C02WI-GT3
IC5	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC10	8-759-549-15	s	IC SN74LV245APWR
IC11	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC12	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC13	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC14	8-759-549-15	s	IC SN74LV245APWR
IC15	8-759-549-15	s	IC SN74LV245APWR
IC16	6-705-514-01	s	IC MAX3222IPWR
IC17	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC101	8-759-392-81	s	IC SN74LVC16245ADGGR
IC102	8-759-392-81	s	IC SN74LVC16245ADGGR
IC103	8-759-392-81	s	IC SN74LVC16245ADGGR
IC104	8-759-392-81	s	IC SN74LVC16245ADGGR
IC105	8-759-392-81	s	IC SN74LVC16245ADGGR
IC106	8-759-392-81	s	IC SN74LVC16245ADGGR
IC107	8-759-549-15	s	IC SN74LV245APWR
IC108	8-759-392-81	s	IC SN74LVC16245ADGGR
IC109	8-759-392-81	s	IC SN74LVC16245ADGGR
IC110	8-759-392-81	s	IC SN74LVC16245ADGGR
IC111	8-759-549-15	s	IC SN74LV245APWR
IC112	8-759-392-81	s	IC SN74LVC16245ADGGR
IC113	8-759-392-77	s	IC SN74LVC245APWR
IC114	8-759-549-15	s	IC SN74LV245APWR

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC116	8-759-472-59	s	IC 74VHC541MTCX
IC117	8-759-549-15	s	IC SN74LV245APWR
IC203	6-707-242-01	s	IC R1LV0416CSB-5SI
IC204	6-707-242-01	s	IC R1LV0416CSB-5SI
IC205	6-707-242-01	s	IC R1LV0416CSB-5SI
IC206	6-707-242-01	s	IC R1LV0416CSB-5SI
IC207	6-707-242-01	s	IC R1LV0416CSB-5SI
IC208	6-707-242-01	s	IC R1LV0416CSB-5SI
IC209	6-707-242-01	s	IC R1LV0416CSB-5SI
IC210	6-707-242-01	s	IC R1LV0416CSB-5SI
IC211	6-707-242-01	s	IC R1LV0416CSB-5SI
IC212	6-707-242-01	s	IC R1LV0416CSB-5SI
IC213	6-707-242-01	s	IC R1LV0416CSB-5SI
IC214	6-707-242-01	s	IC R1LV0416CSB-5SI
IC215	6-707-242-01	s	IC R1LV0416CSB-5SI
IC216	6-707-242-01	s	IC R1LV0416CSB-5SI
IC217	6-707-242-01	s	IC R1LV0416CSB-5SI
IC218	6-707-242-01	s	IC R1LV0416CSB-5SI
IC219	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC221	8-759-392-81	s	IC SN74LVC16245ADGGR
IC222	8-759-392-81	s	IC SN74LVC16245ADGGR
IC223	8-759-392-81	s	IC SN74LVC16245ADGGR
IC301	8-752-392-03	s	IC CXD1095BR
IC302	8-759-669-44	s	IC SN74LVC74APWR-12
IC303	8-752-392-03	s	IC CXD1095BR
IC304	8-759-549-15	s	IC SN74LV245APWR
IC305	6-703-319-01	s	IC EPM7128AETC100-10N
IC306	8-759-437-39	s	IC MB3771PF-ER
IC307	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC308	8-759-557-51	s	IC RN5VD30AA-TL
IC309	8-759-549-15	s	IC SN74LV245APWR
IC311	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC312	8-759-669-42	s	IC SN74LVC138APWR-12
IC313	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC314	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC315	8-759-585-55	s	IC SN74LVC540APWR
IC316	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC320	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC321	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC322	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC323	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC324	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC325	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC326	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC327	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC328	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC329	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC330	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC401	6-703-624-01	s	IC UPD72874GC-YEB
IC402	6-710-018-01	s	IC CAT24C02WI-GT3
IC403	6-700-591-01	s	IC TSB41LV06APZP
IC404	6-700-591-01	s	IC TSB41LV06APZP
IC501	6-703-319-01	s	IC EPM7128AETC100-10N
IC504	6-700-419-01	s	IC CY7C024AV-25AXC
IC505	6-700-419-01	s	IC CY7C024AV-25AXC
IC508	6-710-018-01	s	IC CAT24C02WI-GT3
IC512	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC513	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC514	6-707-876-01	s	IC TC74VHC273FT(EKJ)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC515	8-759-549-15	s	IC SN74LV245APWR
IC602	6-705-039-01	s	IC 93LC46BT-I/SN
IC605	8-759-669-44	s	IC SN74LVC74APWR-12
IC606	8-759-675-47	s	IC SN74LVC04APWR
IC607	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-703-319-01	s	IC EPM7128AETC100-10N
IC704	6-700-419-01	s	IC CY7C024AV-25AXC
IC705	6-700-419-01	s	IC CY7C024AV-25AXC
IC708	6-710-018-01	s	IC CAT24C02WI-GT3
IC712	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC713	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC714	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC715	8-759-549-15	s	IC SN74LV245APWR
IC753	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC754	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC755	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC802	6-705-039-01	s	IC 93LC46BT-I/SN
IC803	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC804	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC901	8-759-639-85	s	IC SN65LVDS31DR
IC902	8-759-639-85	s	IC SN65LVDS31DR
IC903	8-759-639-85	s	IC SN65LVDS31DR
IC904	8-759-639-85	s	IC SN65LVDS31DR
IC905	8-759-639-85	s	IC SN65LVDS31DR
IC906	8-759-639-85	s	IC SN65LVDS31DR
IC907	8-759-639-85	s	IC SN65LVDS31DR
IC908	8-759-639-85	s	IC SN65LVDS31DR
IC909	8-759-639-85	s	IC SN65LVDS31DR
IC910	8-759-639-85	s	IC SN65LVDS31DR
IC911	8-759-639-85	s	IC SN65LVDS31DR
IC912	8-759-639-85	s	IC SN65LVDS31DR
IC913	8-759-549-15	s	IC SN74LV245APWR
IC914	8-752-392-03	s	IC CXD1095BR
IC1011	8-759-714-00	s	IC LT1576CS8#TR
IC1012	6-700-648-01	s	IC LTC1929CG#TR
IC1021	8-759-549-15	s	IC SN74LV245APWR
IC1102	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC1103	6-707-858-01	s	IC TC74VHC00FT(EKJ)
IC1107	8-759-644-10	s	IC MAX3491CSD+TG068
IC1108	8-759-644-10	s	IC MAX3491CSD+TG068
IC1109	8-759-644-10	s	IC MAX3491CSD+TG068
IC1110	8-759-644-10	s	IC MAX3491CSD+TG068
IC1111	8-759-484-69	s	IC MAX3221CAE+TG068
IC1112	8-759-644-10	s	IC MAX3491CSD+TG068
IC1113	8-759-644-10	s	IC MAX3491CSD+TG068
IC1114	8-759-644-10	s	IC MAX3491CSD+TG068
IC1115	8-759-644-10	s	IC MAX3491CSD+TG068
IC1116	8-759-484-69	s	IC MAX3221CAE+TG068
IC1117	8-759-644-10	s	IC MAX3491CSD+TG068
IC1118	8-759-644-10	s	IC MAX3491CSD+TG068
IC1501	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1502	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1601	8-759-472-59	s	IC 74VHC541MTCX
IC1602	8-759-472-59	s	IC 74VHC541MTCX
IC1603	8-759-392-77	s	IC SN74LVC245APWR
IC1604	8-759-669-42	s	IC SN74LVC138APWR-12
IC1605	8-759-523-93	s	IC TC74VHC27FT(EL)
IC1701	8-759-639-86	s	IC SN65LVDS32DR
IC1702	6-707-858-01	s	IC TC74VHC00FT(EKJ)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1	1-469-060-21	s	INDUCTOR
L2	1-469-060-21	s	INDUCTOR
L801	1-469-294-21	s	COIL, 1394 COMMON MODE
L802	1-469-294-21	s	COIL, 1394 COMMON MODE
L803	1-469-294-21	s	COIL, 1394 COMMON MODE
L804	1-469-294-21	s	COIL, 1394 COMMON MODE
L805	1-469-294-21	s	COIL, 1394 COMMON MODE
L806	1-469-294-21	s	COIL, 1394 COMMON MODE
L807	1-469-294-21	s	COIL, 1394 COMMON MODE
L808	1-469-294-21	s	COIL, 1394 COMMON MODE
L809	1-469-294-21	s	COIL, 1394 COMMON MODE
L810	1-469-294-21	s	COIL, 1394 COMMON MODE
L811	1-469-294-21	s	COIL, 1394 COMMON MODE
L812	1-469-294-21	s	COIL, 1394 COMMON MODE
L813	1-469-294-21	s	COIL, 1394 COMMON MODE
L814	1-469-294-21	s	COIL, 1394 COMMON MODE
L815	1-469-294-21	s	COIL, 1394 COMMON MODE
L1301	1-469-530-21	s	INDUCTOR, (SMD) 47UH
PS1	⚠ 1-576-124-21	s	LINK, IC (1A/72V)
Q1	8-729-052-19	s	TRANSISTOR FDS6680A
Q2	8-729-052-19	s	TRANSISTOR FDS6680A
Q3	8-729-052-19	s	TRANSISTOR FDS6680A
Q4	8-729-052-19	s	TRANSISTOR FDS6680A
Q301	8-729-114-84	s	TRANSISTOR 2SB962Z-E2-E
Q302	8-729-120-12	s	TRANSISTOR 2SC1623-T1-L5L6
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q409	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q410	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q411	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q412	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q413	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q414	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q415	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q416	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q417	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q418	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q419	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q420	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q421	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q422	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q751	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R101	1-218-823-91	s	RES, CHIP 100 (1608)
R102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R106	1-218-895-91	s	RES, CHIP 100K (1608)
R107	1-218-895-91	s	RES, CHIP 100K (1608)
R108	1-211-977-91	s	RES, CHIP 22 (1608)
R109	1-211-977-91	s	RES, CHIP 22 (1608)
R110	1-218-823-91	s	RES, CHIP 100 (1608)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R201	1-218-871-91	s	RES, CHIP 10K (1608)
R202	1-218-871-91	s	RES, CHIP 10K (1608)
R203	1-218-871-91	s	RES, CHIP 10K (1608)
R204	1-218-871-91	s	RES, CHIP 10K (1608)
R205	1-218-871-91	s	RES, CHIP 10K (1608)
R206	1-218-871-91	s	RES, CHIP 10K (1608)
R207	1-218-871-91	s	RES, CHIP 10K (1608)
R208	1-211-977-91	s	RES, CHIP 22 (1608)
R209	1-218-863-91	s	RES, CHIP 4.7K (1608)
R210	1-218-863-91	s	RES, CHIP 4.7K (1608)
R301	1-218-843-91	s	RES, CHIP 680 (1608)
R302	1-218-863-91	s	RES, CHIP 4.7K (1608)
R303	1-218-871-91	s	RES, CHIP 10K (1608)
R304	1-218-839-91	s	RES, CHIP 470 (1608)
R305	1-218-871-91	s	RES, CHIP 10K (1608)
R306	1-218-871-91	s	RES, CHIP 10K (1608)
R307	1-218-871-91	s	RES, CHIP 10K (1608)
R308	1-218-871-91	s	RES, CHIP 10K (1608)
R401	1-218-871-91	s	RES, CHIP 10K (1608)
R402	1-218-871-91	s	RES, CHIP 10K (1608)
R403	1-218-911-91	s	RES, CHIP 470K (1608)
R404	1-218-871-91	s	RES, CHIP 10K (1608)
R405	1-218-843-91	s	RES, CHIP 680 (1608)
R406	1-218-843-91	s	RES, CHIP 680 (1608)
R407	1-218-871-91	s	RES, CHIP 10K (1608)
R408	1-218-871-91	s	RES, CHIP 10K (1608)
R409	1-218-871-91	s	RES, CHIP 10K (1608)
R411	1-218-847-91	s	RES, CHIP 1.0K (1608)
R412	1-218-887-91	s	RES, CHIP 47K (1608)
R413	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R414	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R415	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R416	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R417	1-218-871-91	s	RES, CHIP 10K (1608)
R418	1-218-871-91	s	RES, CHIP 10K (1608)
R419	1-218-871-91	s	RES, CHIP 10K (1608)
R420	1-218-871-91	s	RES, CHIP 10K (1608)
R421	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R422	1-218-871-91	s	RES, CHIP 10K (1608)
R425	1-218-871-91	s	RES, CHIP 10K (1608)
R501	1-218-915-91	s	RES, CHIP 680K (1608)
R502	1-218-915-91	s	RES, CHIP 680K (1608)
R503	1-218-915-91	s	RES, CHIP 680K (1608)
R504	1-218-915-91	s	RES, CHIP 680K (1608)
R505	1-218-915-91	s	RES, CHIP 680K (1608)
R506	1-218-915-91	s	RES, CHIP 680K (1608)
R507	1-218-915-91	s	RES, CHIP 680K (1608)
R508	1-218-915-91	s	RES, CHIP 680K (1608)
R509	1-218-915-91	s	RES, CHIP 680K (1608)
R510	1-218-915-91	s	RES, CHIP 680K (1608)
R511	1-218-915-91	s	RES, CHIP 680K (1608)
R512	1-218-915-91	s	RES, CHIP 680K (1608)
R513	1-218-915-91	s	RES, CHIP 680K (1608)
R514	1-218-915-91	s	RES, CHIP 680K (1608)
R515	1-218-915-91	s	RES, CHIP 680K (1608)
R516	1-218-915-91	s	RES, CHIP 680K (1608)
R517	1-218-915-91	s	RES, CHIP 680K (1608)
R518	1-218-915-91	s	RES, CHIP 680K (1608)
R601	1-218-847-91	s	RES, CHIP 1.0K (1608)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R602	1-218-871-91	s	RES, CHIP 10K (1608)
R603	1-218-847-91	s	RES, CHIP 1.0K (1608)
R604	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R605	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R607	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R608	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R609	1-211-990-91	s	RES, CHIP 75 (1608)
R610	1-211-990-91	s	RES, CHIP 75 (1608)
R611	1-211-990-91	s	RES, CHIP 75 (1608)
R612	1-211-990-91	s	RES, CHIP 75 (1608)
R613	1-211-990-91	s	RES, CHIP 75 (1608)
R614	1-211-990-91	s	RES, CHIP 75 (1608)
R615	1-211-990-91	s	RES, CHIP 75 (1608)
R616	1-211-990-91	s	RES, CHIP 75 (1608)
R617	1-211-990-91	s	RES, CHIP 75 (1608)
R618	1-211-990-91	s	RES, CHIP 75 (1608)
R619	1-211-977-91	s	RES, CHIP 22 (1608)
R620	1-211-977-91	s	RES, CHIP 22 (1608)
R703	1-218-887-91	s	RES, CHIP 47K (1608)
R707	1-211-977-91	s	RES, CHIP 22 (1608)
R711	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R712	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R713	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R714	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R715	1-218-823-91	s	RES, CHIP 100 (1608)
R716	1-218-823-91	s	RES, CHIP 100 (1608)
R801	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R802	1-218-823-91	s	RES, CHIP 100 (1608)
R803	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R805	1-218-864-91	s	RES, CHIP 5.1K (1608)
R806	1-218-864-91	s	RES, CHIP 5.1K (1608)
R808	1-218-864-91	s	RES, CHIP 5.1K (1608)
R810	1-218-909-91	s	RES, CHIP 390K (1608)
R811	1-218-895-91	s	RES, CHIP 100K (1608)
R812	1-218-871-91	s	RES, CHIP 10K (1608)
R813	1-218-847-91	s	RES, CHIP 1.0K (1608)
R814	1-218-847-91	s	RES, CHIP 1.0K (1608)
R815	1-218-847-91	s	RES, CHIP 1.0K (1608)
R817	1-218-871-91	s	RES, CHIP 10K (1608)
R818	1-218-871-91	s	RES, CHIP 10K (1608)
R819	1-218-871-91	s	RES, CHIP 10K (1608)
R820	1-218-871-91	s	RES, CHIP 10K (1608)
R821	1-218-871-91	s	RES, CHIP 10K (1608)
R822	1-218-895-91	s	RES, CHIP 100K (1608)
R823	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R824	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R825	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R826	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R827	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R829	1-211-987-91	s	RES, CHIP 56 (1608)
R830	1-211-987-91	s	RES, CHIP 56 (1608)
R831	1-211-987-91	s	RES, CHIP 56 (1608)
R832	1-211-987-91	s	RES, CHIP 56 (1608)
R833	1-211-987-91	s	RES, CHIP 56 (1608)
R834	1-211-987-91	s	RES, CHIP 56 (1608)
R835	1-211-987-91	s	RES, CHIP 56 (1608)
R836	1-211-987-91	s	RES, CHIP 56 (1608)
R837	1-211-987-91	s	RES, CHIP 56 (1608)
R838	1-211-987-91	s	RES, CHIP 56 (1608)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R839	1-211-987-91	s	RES, CHIP 56 (1608)
R840	1-211-987-91	s	RES, CHIP 56 (1608)
R841	1-218-909-91	s	RES, CHIP 390K (1608)
R842	1-218-847-91	s	RES, CHIP 1.0K (1608)
R843	1-218-847-91	s	RES, CHIP 1.0K (1608)
R844	1-218-847-91	s	RES, CHIP 1.0K (1608)
R845	1-218-871-91	s	RES, CHIP 10K (1608)
R846	1-218-871-91	s	RES, CHIP 10K (1608)
R847	1-218-847-91	s	RES, CHIP 1.0K (1608)
R848	1-218-919-91	s	RES, CHIP 1M (1608)
R849	1-218-863-91	s	RES, CHIP 4.7K (1608)
R850	1-218-871-91	s	RES, CHIP 10K (1608)
R851	1-218-871-91	s	RES, CHIP 10K (1608)
R852	1-218-847-91	s	RES, CHIP 1.0K (1608)
R853	1-218-847-91	s	RES, CHIP 1.0K (1608)
R854	1-218-864-91	s	RES, CHIP 5.1K (1608)
R855	1-211-987-91	s	RES, CHIP 56 (1608)
R856	1-211-987-91	s	RES, CHIP 56 (1608)
R857	1-211-987-91	s	RES, CHIP 56 (1608)
R858	1-211-987-91	s	RES, CHIP 56 (1608)
R859	1-211-987-91	s	RES, CHIP 56 (1608)
R860	1-211-987-91	s	RES, CHIP 56 (1608)
R861	1-218-864-91	s	RES, CHIP 5.1K (1608)
R862	1-218-864-91	s	RES, CHIP 5.1K (1608)
R863	1-218-864-91	s	RES, CHIP 5.1K (1608)
R864	1-211-987-91	s	RES, CHIP 56 (1608)
R865	1-211-987-91	s	RES, CHIP 56 (1608)
R866	1-211-987-91	s	RES, CHIP 56 (1608)
R867	1-211-987-91	s	RES, CHIP 56 (1608)
R868	1-211-987-91	s	RES, CHIP 56 (1608)
R869	1-211-987-91	s	RES, CHIP 56 (1608)
R870	1-211-987-91	s	RES, CHIP 56 (1608)
R871	1-211-987-91	s	RES, CHIP 56 (1608)
R872	1-211-987-91	s	RES, CHIP 56 (1608)
R873	1-211-987-91	s	RES, CHIP 56 (1608)
R874	1-218-864-91	s	RES, CHIP 5.1K (1608)
R875	1-218-864-91	s	RES, CHIP 5.1K (1608)
R876	1-211-987-91	s	RES, CHIP 56 (1608)
R877	1-211-987-91	s	RES, CHIP 56 (1608)
R878	1-211-987-91	s	RES, CHIP 56 (1608)
R879	1-211-987-91	s	RES, CHIP 56 (1608)
R880	1-211-987-91	s	RES, CHIP 56 (1608)
R881	1-211-987-91	s	RES, CHIP 56 (1608)
R882	1-211-987-91	s	RES, CHIP 56 (1608)
R883	1-211-987-91	s	RES, CHIP 56 (1608)
R884	1-218-847-91	s	RES, CHIP 1.0K (1608)
R885	1-218-919-91	s	RES, CHIP 1M (1608)
R886	1-218-863-91	s	RES, CHIP 4.7K (1608)
R887	1-218-909-91	s	RES, CHIP 390K (1608)
R888	1-218-847-91	s	RES, CHIP 1.0K (1608)
R889	1-218-847-91	s	RES, CHIP 1.0K (1608)
R890	1-218-847-91	s	RES, CHIP 1.0K (1608)
R891	1-218-871-91	s	RES, CHIP 10K (1608)
R892	1-218-871-91	s	RES, CHIP 10K (1608)
R893	1-218-871-91	s	RES, CHIP 10K (1608)
R894	1-218-871-91	s	RES, CHIP 10K (1608)
R895	1-218-847-91	s	RES, CHIP 1.0K (1608)
R896	1-218-847-91	s	RES, CHIP 1.0K (1608)
R897	1-218-864-91	s	RES, CHIP 5.1K (1608)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R898	1-211-987-91	s	RES, CHIP 56 (1608)
R899	1-211-987-91	s	RES, CHIP 56 (1608)
R900	1-211-987-91	s	RES, CHIP 56 (1608)
R901	1-211-987-91	s	RES, CHIP 56 (1608)
R902	1-211-987-91	s	RES, CHIP 56 (1608)
R903	1-211-987-91	s	RES, CHIP 56 (1608)
R904	1-218-864-91	s	RES, CHIP 5.1K (1608)
R905	1-218-864-91	s	RES, CHIP 5.1K (1608)
R906	1-218-864-91	s	RES, CHIP 5.1K (1608)
R907	1-211-987-91	s	RES, CHIP 56 (1608)
R908	1-211-987-91	s	RES, CHIP 56 (1608)
R909	1-211-987-91	s	RES, CHIP 56 (1608)
R910	1-211-987-91	s	RES, CHIP 56 (1608)
R911	1-211-987-91	s	RES, CHIP 56 (1608)
R912	1-211-987-91	s	RES, CHIP 56 (1608)
R913	1-211-987-91	s	RES, CHIP 56 (1608)
R914	1-211-987-91	s	RES, CHIP 56 (1608)
R915	1-211-987-91	s	RES, CHIP 56 (1608)
R916	1-211-987-91	s	RES, CHIP 56 (1608)
R917	1-218-864-91	s	RES, CHIP 5.1K (1608)
R918	1-218-864-91	s	RES, CHIP 5.1K (1608)
R919	1-211-987-91	s	RES, CHIP 56 (1608)
R920	1-211-987-91	s	RES, CHIP 56 (1608)
R921	1-211-987-91	s	RES, CHIP 56 (1608)
R922	1-211-987-91	s	RES, CHIP 56 (1608)
R923	1-211-987-91	s	RES, CHIP 56 (1608)
R924	1-211-987-91	s	RES, CHIP 56 (1608)
R925	1-211-987-91	s	RES, CHIP 56 (1608)
R926	1-211-987-91	s	RES, CHIP 56 (1608)
R927	1-218-843-91	s	RES, CHIP 680 (1608)
R929	1-218-843-91	s	RES, CHIP 680 (1608)
R930	1-218-871-91	s	RES, CHIP 10K (1608)
R950	1-218-823-91	s	RES, CHIP 100 (1608)
R951	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R952	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R953	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R954	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R955	1-218-871-91	s	RES, CHIP 10K (1608)
R956	1-218-871-91	s	RES, CHIP 10K (1608)
R957	1-218-871-91	s	RES, CHIP 10K (1608)
R958	1-218-871-91	s	RES, CHIP 10K (1608)
R959	1-218-871-91	s	RES, CHIP 10K (1608)
R960	1-218-871-91	s	RES, CHIP 10K (1608)
R1001	1-218-823-91	s	RES, CHIP 100 (1608)
R1002	1-218-871-91	s	RES, CHIP 10K (1608)
R1003	1-218-871-91	s	RES, CHIP 10K (1608)
R1004	1-218-871-91	s	RES, CHIP 10K (1608)
R1005	1-211-977-91	s	RES, CHIP 22 (1608)
R1006	1-211-977-91	s	RES, CHIP 22 (1608)
R1007	1-211-977-91	s	RES, CHIP 22 (1608)
R1008	1-211-977-91	s	RES, CHIP 22 (1608)
R1009	1-218-839-91	s	RES, CHIP 470 (1608)
R1010	1-218-839-91	s	RES, CHIP 470 (1608)
R1011	1-218-823-91	s	RES, CHIP 100 (1608)
R1012	1-218-823-91	s	RES, CHIP 100 (1608)
R1013	1-218-839-91	s	RES, CHIP 470 (1608)
R1014	1-218-839-91	s	RES, CHIP 470 (1608)
R1015	1-218-827-91	s	RES, CHIP 150 (1608)
R1016	1-218-839-91	s	RES, CHIP 470 (1608)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1017	1-218-871-91	s	RES, CHIP 10K (1608)
R1018	1-218-871-91	s	RES, CHIP 10K (1608)
R1021	1-211-977-91	s	RES, CHIP 22 (1608)
R1022	1-218-831-91	s	RES, CHIP 220 (1608)
R1024	1-218-839-91	s	RES, CHIP 470 (1608)
R1025	1-218-839-91	s	RES, CHIP 470 (1608)
R1101	1-218-823-91	s	RES, CHIP 100 (1608)
R1102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1106	1-218-871-91	s	RES, CHIP 10K (1608)
R1107	1-218-871-91	s	RES, CHIP 10K (1608)
R1108	1-218-871-91	s	RES, CHIP 10K (1608)
R1109	1-218-871-91	s	RES, CHIP 10K (1608)
R1110	1-218-871-91	s	RES, CHIP 10K (1608)
R1111	1-218-871-91	s	RES, CHIP 10K (1608)
R1201	1-218-823-91	s	RES, CHIP 100 (1608)
R1202	1-218-871-91	s	RES, CHIP 10K (1608)
R1203	1-218-871-91	s	RES, CHIP 10K (1608)
R1204	1-218-871-91	s	RES, CHIP 10K (1608)
R1205	1-218-839-91	s	RES, CHIP 470 (1608)
R1206	1-218-839-91	s	RES, CHIP 470 (1608)
R1207	1-218-839-91	s	RES, CHIP 470 (1608)
R1208	1-218-839-91	s	RES, CHIP 470 (1608)
R1209	1-218-823-91	s	RES, CHIP 100 (1608)
R1210	1-218-823-91	s	RES, CHIP 100 (1608)
R1211	1-218-827-91	s	RES, CHIP 150 (1608)
R1212	1-218-839-91	s	RES, CHIP 470 (1608)
R1213	1-218-871-91	s	RES, CHIP 10K (1608)
R1214	1-218-871-91	s	RES, CHIP 10K (1608)
R1218	1-211-977-91	s	RES, CHIP 22 (1608)
R1219	1-218-831-91	s	RES, CHIP 220 (1608)
R1221	1-218-839-91	s	RES, CHIP 470 (1608)
R1222	1-218-839-91	s	RES, CHIP 470 (1608)
R1301	1-218-871-91	s	RES, CHIP 10K (1608)
R1302	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1303	1-218-839-91	s	RES, CHIP 470 (1608)
R1304	1-218-879-91	s	RES, CHIP 22K (1608)
R1305	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1306	1-218-919-91	s	RES, CHIP 1M (1608)
R1307	1-218-831-91	s	RES, CHIP 220 (1608)
R1308	1-218-887-91	s	RES, CHIP 47K (1608)
R1309	1-218-879-91	s	RES, CHIP 22K (1608)
R1310	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1311	1-218-871-91	s	RES, CHIP 10K (1608)
R1312	1-218-871-91	s	RES, CHIP 10K (1608)
R1313	1-211-969-91	s	RES, CHIP 10 (1608)
R1314	1-218-871-91	s	RES, CHIP 10K (1608)
R1315	1-218-871-91	s	RES, CHIP 10K (1608)
R1316	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1317	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1318	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1319	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1320	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1321	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1322	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1323	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1324	1-218-847-91	s	RES, CHIP 1.0K (1608)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1325	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1326	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1327	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1328	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1329	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1401	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1402	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1403	1-218-871-91	s	RES, CHIP 10K (1608)
R1404	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1406	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1407	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1409	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1410	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1411	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1412	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1413	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1414	1-218-871-91	s	RES, CHIP 10K (1608)
R1415	1-218-871-91	s	RES, CHIP 10K (1608)
R1416	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1418	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1419	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1421	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1424	1-218-871-91	s	RES, CHIP 10K (1608)
R1425	1-218-871-91	s	RES, CHIP 10K (1608)
R1427	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1428	1-218-871-91	s	RES, CHIP 10K (1608)
R1430	1-218-871-91	s	RES, CHIP 10K (1608)
R1431	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1501	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1502	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1503	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1504	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1513	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1701	1-218-823-91	s	RES, CHIP 100 (1608)
R1702	1-211-977-91	s	RES, CHIP 22 (1608)
R1703	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1704	1-218-871-91	s	RES, CHIP 10K (1608)
R1706	1-218-823-91	s	RES, CHIP 100 (1608)
R1707	1-211-977-91	s	RES, CHIP 22 (1608)
RB101	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB102	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB103	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB104	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB105	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB106	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB107	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB108	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB109	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB110	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB111	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB112	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB113	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB114	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB115	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB116	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB117	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB118	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB119	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB201	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB202	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB203	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB204	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB205	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB206	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB207	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB208	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB209	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB210	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB211	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB212	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB215	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB216	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB301	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB302	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB303	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB304	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB305	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB306	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB307	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB308	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB309	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB311	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB312	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB313	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB314	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB315	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB316	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB317	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB318	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB321	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB322	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB323	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB324	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB326	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB327	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB329	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB402	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB403	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB404	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB405	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB406	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB407	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB408	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB409	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB410	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB411	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB412	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB413	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB414	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB415	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB416	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB417	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB418	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB419	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB420	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB421	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB422	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB423	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB424	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB425	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB426	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB427	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB428	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB429	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB430	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB431	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB432	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB433	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB434	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB435	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB436	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB437	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB438	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB501	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB502	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB503	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB504	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB505	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB506	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB507	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB508	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB509	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB510	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB601	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB602	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB603	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB604	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB605	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB606	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB701	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB702	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB703	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB704	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB705	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB706	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB707	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB708	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB901	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB902	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB903	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB904	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB905	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB906	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB907	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB908	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB909	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1101	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1102	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1103	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1104	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1105	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB1106	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1107	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1108	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1109	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1301	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1302	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)

(CA-54C BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1601	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1602	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1603	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1604	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1605	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1606	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1607	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1608	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RY401	1-755-379-21	s	RELAY
RY402	1-755-379-21	s	RELAY
RY403	1-755-379-21	s	RELAY
RY404	1-755-379-21	s	RELAY
RY405	1-755-379-21	s	RELAY
RY406	1-755-379-21	s	RELAY
RY407	1-755-379-21	s	RELAY
RY408	1-755-379-21	s	RELAY
S101	1-692-271-41	s	SWITCH, SLIDE
S102	1-771-881-21	s	SWITCH, DIGITAL (SMD)
S103	1-771-881-21	s	SWITCH, DIGITAL (SMD)
S104	1-771-721-21	s	SWITCH, TACTILE
S401	1-771-721-21	s	SWITCH, TACTILE
S402	1-771-721-21	s	SWITCH, TACTILE
S403	1-692-270-41	s	SWITCH, SLIDE
S901	1-771-721-21	s	SWITCH, TACTILE
S902	1-692-271-41	s	SWITCH, SLIDE
S1101	1-771-721-21	s	SWITCH, TACTILE
S1102	1-692-271-41	s	SWITCH, SLIDE
TP1	1-535-877-22	s	CHIP, CHECKER
TP23	1-535-877-22	s	CHIP, CHECKER
TP1301	1-535-877-22	s	CHIP, CHECKER
X701	1-795-944-21	s	OSCILLATOR, CRYSTAL (SMD)
X801	1-813-043-11	s	VIBRATOR, CRYSTAL (24.576MHZ)
X802	1-813-043-11	s	VIBRATOR, CRYSTAL (24.576MHZ)
X803	1-813-043-11	s	VIBRATOR, CRYSTAL (24.576MHZ)
X1001	1-813-038-21	s	OSCILLATOR, CRYSTAL (SMD)

CA-54CFE BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1633-323-A	s	CA-54CFE ASSY (WITH MOUNT)
1pc	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
1pc	A-1558-837-A	s	MOUNTED CIRCUIT BOARD, DIF-184
2pcs	1-761-434-13	s	PC BOARD, (CPU-DK MODULE)
1pc	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
1pc	1-840-096-11	s	CARD, COMPACT FLASH (128M)
5pcs	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
2pcs	3-626-956-02	o	SHEET1,HEAT CONDUCTION(SDI)
7pcs	3-636-891-01	o	SPACER
2pcs	3-639-733-01	o	BRACKET(K)
4pcs	3-639-734-01	o	CUSHION
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
2pcs	7-626-300-54	s	SPRING PIN 3X6
23pcs	7-682-946-01	s	SCREW +PSW 3X5
2pcs	7-682-948-01	s	SCREW +PSW 3X8
4pcs	9-911-841-99	s	CUSHION, METER
C101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C104	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C105	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C106	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C107	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C108	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C109	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C110	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C111	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C112	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C113	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C114	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C115	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C116	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C117	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C118	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C119	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C120	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C121	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C122	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C123	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C124	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C125	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C126	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C127	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C128	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C129	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C130	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C131	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C132	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C133	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C134	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C135	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C136	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C137	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C138	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C141	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C142	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C201	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C202	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C203	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C204	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C205	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C206	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C207	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C208	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C209	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C210	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C211	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C212	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C213	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C214	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C215	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C217	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C219	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C220	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C221	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C222	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C223	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C224	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C225	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C226	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C227	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C228	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C229	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C230	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C231	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C232	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C233	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C234	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C235	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C236	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C237	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C238	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C239	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C240	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C241	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C242	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C243	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C244	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C245	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C246	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C247	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C248	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C249	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C250	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C251	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C252	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C253	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C254	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C255	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C256	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C257	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C258	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C260	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C261	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C262	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C263	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C264	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C265	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C266	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C267	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C268	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C269	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C270	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C271	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C272	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C273	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C274	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C275	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C276	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C277	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C278	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C279	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C280	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C281	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C282	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C283	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C284	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C285	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C286	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C287	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C301	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C302	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C303	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C304	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C305	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C306	1-165-603-11	s	CAP, DOUBLE LAYERS 1.5F
C307	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C308	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C309	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C310	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C311	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C312	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C313	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C314	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C315	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C316	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C317	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C318	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C319	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C320	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C321	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C322	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C323	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C324	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C325	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C326	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C327	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C328	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C329	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C330	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C331	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C332	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C333	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C334	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C335	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C336	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C337	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C338	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C339	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C340	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C341	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C342	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C343	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C344	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C345	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C346	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C347	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C348	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C349	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C350	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C351	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C352	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C353	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C354	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C355	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C356	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C357	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C358	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C359	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C360	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C361	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C362	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C363	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C364	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C365	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C366	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C367	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C368	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C401	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C403	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C404	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C405	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C406	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C407	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C408	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C410	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C411	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C412	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C413	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C414	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C415	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C416	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C417	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C418	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C419	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C420	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C421	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C422	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C423	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C424	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C425	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C426	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C427	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C428	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C429	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C430	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C431	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C432	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C433	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C434	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C435	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C436	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C437	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C438	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C439	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C440	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C441	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C442	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C443	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C444	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C445	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C446	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C447	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C448	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C449	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C450	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C451	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C452	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C453	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C454	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C455	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C456	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C457	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C458	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C459	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C460	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C461	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C462	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C463	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C464	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C465	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C466	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C467	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C468	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C469	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C470	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C471	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C472	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C473	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C474	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C475	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C476	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C477	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C478	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C479	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C480	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C481	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C482	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C483	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C484	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C485	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C486	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C487	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C488	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C489	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C501	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C502	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C503	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C504	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C505	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C506	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C507	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C508	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C509	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C510	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C511	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C512	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C513	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C514	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C515	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C516	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C517	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C518	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C519	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C520	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C521	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C522	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C523	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C524	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C525	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C526	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C527	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C528	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C529	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C601	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C602	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C603	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C604	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C605	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C606	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C607	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C608	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C611	1-165-585-21	s	CAP, CHIP ELECT 47MF
C612	1-165-585-21	s	CAP, CHIP ELECT 47MF
C613	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C614	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C701	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C702	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C703	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C704	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C705	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C706	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C707	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C708	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C709	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C710	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C711	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C712	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C713	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C714	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C715	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C716	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C717	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C718	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C719	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C720	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C725	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C726	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C727	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C728	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C729	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C730	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C731	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C732	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C733	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C734	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C735	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C736	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C737	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C738	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C739	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C740	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C741	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C742	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C743	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C744	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C745	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C746	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C747	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C748	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C749	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C750	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C751	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C752	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C753	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C754	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C755	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C756	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C757	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C758	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C759	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C760	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C761	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C762	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C763	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C764	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C803	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C804	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C805	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C806	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C807	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C808	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C809	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C810	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C811	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C812	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C813	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C814	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C816	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C817	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C818	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C819	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C820	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C821	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C824	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C825	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C826	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C827	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C831	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C832	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C838	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C839	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C840	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C841	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C894	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C895	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C896	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C897	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C898	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C899	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C900	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C901	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C902	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C903	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C904	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C905	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C906	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C907	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C908	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C909	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C910	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C911	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C912	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C913	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C914	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C915	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C916	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C917	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C918	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C919	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C920	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C921	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C922	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C923	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C924	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C925	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C926	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C927	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C928	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C929	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C930	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C931	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C932	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C933	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C934	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C935	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C936	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C937	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C950	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C951	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C952	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C953	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C954	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C955	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C956	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C957	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C958	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C959	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C960	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C961	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C962	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C963	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C964	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C965	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C966	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C967	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C968	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C969	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C970	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C971	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C972	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C973	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C974	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C975	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C976	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C977	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C980	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C981	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C982	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C983	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C984	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C985	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C986	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C987	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C988	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C989	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C990	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C991	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C992	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C993	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C994	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C995	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1001	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1002	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1003	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1004	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1005	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1006	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1007	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1008	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1009	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1010	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1011	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1012	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1013	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1014	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1015	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1016	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1017	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1018	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1019	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1020	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1021	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1022	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1023	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1102	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1104	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C1105	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1107	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1108	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1109	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1110	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1111	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1112	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1113	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1114	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1115	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1116	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1117	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1118	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1119	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1120	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1121	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1122	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1123	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1124	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1125	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1126	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1127	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1128	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1131	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1132	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1133	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1134	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1135	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1136	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1137	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1138	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1139	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1140	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1141	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1142	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1143	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1144	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1145	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1146	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1201	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1202	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1203	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1204	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1205	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1206	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1207	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1208	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1209	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1210	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1211	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1212	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1213	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1214	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1215	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1217	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1219	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1220	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1221	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1222	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1223	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1301	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1302	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1304	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1305	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C1307	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1308	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1309	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1310	1-100-118-21	s	CAP, ELECT 82MF (8X7)
C1311	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1312	1-165-585-21	s	CAP, CHIP ELECT 47MF
C1313	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C1314	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1315	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1316	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1317	1-128-993-21	s	CAP, ELECT 22MF (4.3X5.5)
C1318	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1319	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C1320	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1322	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C1323	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1324	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1401	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1403	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1404	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1405	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1406	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1407	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1408	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1410	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1411	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1412	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1413	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1414	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1415	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1416	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1425	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1426	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1427	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1428	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1429	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1430	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1431	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1432	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1501	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1502	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1503	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1504	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1601	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1602	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1603	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1604	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1605	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1701	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C1702	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1703	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1704	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN101	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN103	1-564-013-11	o	PIN, CONNECTOR 3P
CN501	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN503	1-564-013-11	o	PIN, CONNECTOR 3P
CN701	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN703	1-564-013-11	o	PIN, CONNECTOR 3P
CN801	1-785-552-21	o	CONNECTOR, BOARD TO BOARD 80P
CN1003	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-024-83	s	DIODE 1SS301-TE85L
D2	8-719-072-83	s	DIODE MBRS340T3
D3	8-719-072-83	s	DIODE MBRS340T3
D4	8-719-074-31	s	DIODE CL-196YG-CD-T
D5	8-719-074-31	s	DIODE CL-196YG-CD-T
D6	8-719-024-83	s	DIODE 1SS301-TE85L
D101	8-719-074-31	s	DIODE CL-196YG-CD-T
D102	8-719-074-31	s	DIODE CL-196YG-CD-T
D103	8-719-074-31	s	DIODE CL-196YG-CD-T
D104	8-719-074-31	s	DIODE CL-196YG-CD-T
D105	8-719-074-31	s	DIODE CL-196YG-CD-T
D106	8-719-074-31	s	DIODE CL-196YG-CD-T
D107	8-719-074-31	s	DIODE CL-196YG-CD-T
D108	8-719-074-31	s	DIODE CL-196YG-CD-T
D109	8-719-074-31	s	DIODE CL-196YG-CD-T
D110	8-719-074-31	s	DIODE CL-196YG-CD-T
D111	8-719-074-31	s	DIODE CL-196YG-CD-T
D112	8-719-074-31	s	DIODE CL-196YG-CD-T
D113	8-719-074-31	s	DIODE CL-196YG-CD-T
D114	8-719-074-31	s	DIODE CL-196YG-CD-T
D115	8-719-074-31	s	DIODE CL-196YG-CD-T
D116	8-719-074-31	s	DIODE CL-196YG-CD-T
D117	8-719-074-31	s	DIODE CL-196YG-CD-T
D118	8-719-074-31	s	DIODE CL-196YG-CD-T
D119	8-719-074-31	s	DIODE CL-196YG-CD-T
D120	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-016-87	s	DIODE 02DZ2.2-TPH3
D302	8-719-056-65	s	DIODE 1SS372-TE85L
D401	8-719-820-42	s	DIODE 1SS302-TE85L
D402	8-719-820-42	s	DIODE 1SS302-TE85L
D403	8-719-820-42	s	DIODE 1SS302-TE85L
D404	8-719-820-42	s	DIODE 1SS302-TE85L
D405	8-719-820-42	s	DIODE 1SS302-TE85L
D406	8-719-820-42	s	DIODE 1SS302-TE85L

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D407	8-719-820-42	s	DIODE 1SS302-TE85L
D408	8-719-820-42	s	DIODE 1SS302-TE85L
D409	8-719-077-09	s	DIODE CL-196HR-CD-T
D410	8-719-077-09	s	DIODE CL-196HR-CD-T
D411	8-719-820-42	s	DIODE 1SS302-TE85L
D412	8-719-820-42	s	DIODE 1SS302-TE85L
D413	8-719-820-42	s	DIODE 1SS302-TE85L
D414	8-719-820-42	s	DIODE 1SS302-TE85L
D415	8-719-820-42	s	DIODE 1SS302-TE85L
D416	8-719-820-42	s	DIODE 1SS302-TE85L
D417	8-719-820-42	s	DIODE 1SS302-TE85L
D418	8-719-820-42	s	DIODE 1SS302-TE85L
D501	8-719-820-42	s	DIODE 1SS302-TE85L
D502	8-719-820-42	s	DIODE 1SS302-TE85L
D503	8-719-820-42	s	DIODE 1SS302-TE85L
D504	8-719-820-42	s	DIODE 1SS302-TE85L
D505	8-719-820-42	s	DIODE 1SS302-TE85L
D506	8-719-820-42	s	DIODE 1SS302-TE85L
D507	8-719-820-42	s	DIODE 1SS302-TE85L
D508	8-719-820-42	s	DIODE 1SS302-TE85L
D509	8-719-820-42	s	DIODE 1SS302-TE85L
D510	8-719-820-42	s	DIODE 1SS302-TE85L
D511	8-719-820-42	s	DIODE 1SS302-TE85L
D512	8-719-820-42	s	DIODE 1SS302-TE85L
D513	8-719-024-83	s	DIODE 1SS301-TE85L
D514	8-719-024-83	s	DIODE 1SS301-TE85L
D515	8-719-024-83	s	DIODE 1SS301-TE85L
D516	8-719-024-83	s	DIODE 1SS301-TE85L
D517	8-719-024-83	s	DIODE 1SS301-TE85L
D518	8-719-024-83	s	DIODE 1SS301-TE85L
D519	8-719-820-42	s	DIODE 1SS302-TE85L
D520	8-719-820-42	s	DIODE 1SS302-TE85L
D521	8-719-820-42	s	DIODE 1SS302-TE85L
D522	8-719-820-42	s	DIODE 1SS302-TE85L
D523	8-719-820-42	s	DIODE 1SS302-TE85L
D524	8-719-820-42	s	DIODE 1SS302-TE85L
D525	8-719-024-83	s	DIODE 1SS301-TE85L
D526	8-719-024-83	s	DIODE 1SS301-TE85L
D527	8-719-024-83	s	DIODE 1SS301-TE85L
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-074-31	s	DIODE CL-196YG-CD-T
D903	8-719-074-31	s	DIODE CL-196YG-CD-T
D904	8-719-074-31	s	DIODE CL-196YG-CD-T
D905	8-719-074-31	s	DIODE CL-196YG-CD-T
D906	8-719-074-31	s	DIODE CL-196YG-CD-T
D907	8-719-074-31	s	DIODE CL-196YG-CD-T
D908	8-719-074-31	s	DIODE CL-196YG-CD-T
D909	8-719-074-31	s	DIODE CL-196YG-CD-T
D910	8-719-074-31	s	DIODE CL-196YG-CD-T
D911	8-719-074-31	s	DIODE CL-196YG-CD-T
D912	8-719-074-31	s	DIODE CL-196YG-CD-T
D913	8-719-074-31	s	DIODE CL-196YG-CD-T
D914	8-719-074-31	s	DIODE CL-196YG-CD-T
D915	8-719-074-31	s	DIODE CL-196YG-CD-T
D916	8-719-074-31	s	DIODE CL-196YG-CD-T
D917	8-719-074-31	s	DIODE CL-196YG-CD-T
D918	8-719-074-31	s	DIODE CL-196YG-CD-T
D919	8-719-074-31	s	DIODE CL-196YG-CD-T
D920	8-719-074-31	s	DIODE CL-196YG-CD-T

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1001	8-719-074-31	s	DIODE CL-196YG-CD-T
D1002	8-719-074-31	s	DIODE CL-196YG-CD-T
D1101	8-719-074-31	s	DIODE CL-196YG-CD-T
D1102	8-719-074-31	s	DIODE CL-196YG-CD-T
D1103	8-719-074-31	s	DIODE CL-196YG-CD-T
D1104	8-719-074-31	s	DIODE CL-196YG-CD-T
D1105	8-719-074-31	s	DIODE CL-196YG-CD-T
D1106	8-719-074-31	s	DIODE CL-196YG-CD-T
D1107	8-719-074-31	s	DIODE CL-196YG-CD-T
D1108	8-719-074-31	s	DIODE CL-196YG-CD-T
D1109	8-719-074-31	s	DIODE CL-196YG-CD-T
D1110	8-719-074-31	s	DIODE CL-196YG-CD-T
D1111	8-719-074-31	s	DIODE CL-196YG-CD-T
D1112	8-719-074-31	s	DIODE CL-196YG-CD-T
D1113	8-719-074-31	s	DIODE CL-196YG-CD-T
D1114	8-719-074-31	s	DIODE CL-196YG-CD-T
D1115	8-719-074-31	s	DIODE CL-196YG-CD-T
D1116	8-719-074-31	s	DIODE CL-196YG-CD-T
D1117	8-719-074-31	s	DIODE CL-196YG-CD-T
D1118	8-719-074-31	s	DIODE CL-196YG-CD-T
D1119	8-719-074-31	s	DIODE CL-196YG-CD-T
D1120	8-719-074-31	s	DIODE CL-196YG-CD-T
D1201	8-719-074-31	s	DIODE CL-196YG-CD-T
D1202	8-719-074-31	s	DIODE CL-196YG-CD-T
D1301	8-719-820-42	s	DIODE 1SS302-TE85L
D1302	8-719-048-17	s	DIODE MBRS130LT3
D1303	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB801	1-500-448-21	s	FERRITE, EMI (SMD) (3216)
FB803	1-500-448-21	s	FERRITE, EMI (SMD) (3216)
FL801	1-239-899-21	s	FILTER, CHIP EMI
FL803	1-239-899-21	s	FILTER, CHIP EMI
IC1	6-703-320-01	s	IC EPM7128AETC100-7N
IC4	6-710-018-01	s	IC CAT24C02WI-GT3
IC5	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC10	8-759-549-15	s	IC SN74LV245APWR
IC11	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC12	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC13	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC14	8-759-549-15	s	IC SN74LV245APWR
IC15	8-759-549-15	s	IC SN74LV245APWR
IC16	6-705-514-01	s	IC MAX3222IPWR
IC17	8-759-831-52	s	IC TC7WH125FK(TE85R)
IC101	8-759-392-81	s	IC SN74LVC16245ADGGR
IC102	8-759-392-81	s	IC SN74LVC16245ADGGR
IC103	8-759-392-81	s	IC SN74LVC16245ADGGR
IC104	8-759-392-81	s	IC SN74LVC16245ADGGR
IC105	8-759-392-81	s	IC SN74LVC16245ADGGR
IC106	8-759-392-81	s	IC SN74LVC16245ADGGR

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC107	8-759-549-15	s	IC SN74LV245APWR
IC108	8-759-392-81	s	IC SN74LVC16245ADGGR
IC109	8-759-392-81	s	IC SN74LVC16245ADGGR
IC110	8-759-392-81	s	IC SN74LVC16245ADGGR
IC111	8-759-549-15	s	IC SN74LV245APWR
IC112	8-759-392-81	s	IC SN74LVC16245ADGGR
IC113	8-759-392-77	s	IC SN74LVC245APWR
IC114	8-759-549-15	s	IC SN74LV245APWR
IC116	8-759-472-59	s	IC 74VHC541MTCX
IC117	8-759-549-15	s	IC SN74LV245APWR
IC201	6-707-621-01	s	IC S29AL016D70TFI020
IC202	6-707-621-01	s	IC S29AL016D70TFI020
IC203	6-707-242-01	s	IC R1LV0416CSB-5SI
IC204	6-707-242-01	s	IC R1LV0416CSB-5SI
IC205	6-707-242-01	s	IC R1LV0416CSB-5SI
IC206	6-707-242-01	s	IC R1LV0416CSB-5SI
IC207	6-707-242-01	s	IC R1LV0416CSB-5SI
IC208	6-707-242-01	s	IC R1LV0416CSB-5SI
IC209	6-707-242-01	s	IC R1LV0416CSB-5SI
IC210	6-707-242-01	s	IC R1LV0416CSB-5SI
IC211	6-707-242-01	s	IC R1LV0416CSB-5SI
IC212	6-707-242-01	s	IC R1LV0416CSB-5SI
IC213	6-707-242-01	s	IC R1LV0416CSB-5SI
IC214	6-707-242-01	s	IC R1LV0416CSB-5SI
IC215	6-707-242-01	s	IC R1LV0416CSB-5SI
IC216	6-707-242-01	s	IC R1LV0416CSB-5SI
IC217	6-707-242-01	s	IC R1LV0416CSB-5SI
IC218	6-707-242-01	s	IC R1LV0416CSB-5SI
IC219	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC221	8-759-392-81	s	IC SN74LVC16245ADGGR
IC222	8-759-392-81	s	IC SN74LVC16245ADGGR
IC223	8-759-392-81	s	IC SN74LVC16245ADGGR
IC301	8-752-392-03	s	IC CXD1095BR
IC302	8-759-669-44	s	IC SN74LVC74APWR-12
IC303	8-752-392-03	s	IC CXD1095BR
IC304	8-759-549-15	s	IC SN74LV245APWR
IC305	6-703-319-01	s	IC EPM7128AETC100-10N
IC306	8-759-437-39	s	IC MB3771PF-ER
IC307	8-759-363-26	s	IC RN5VD28AA-TL-FA
IC308	8-759-557-51	s	IC RN5VD30AA-TL
IC309	8-759-549-15	s	IC SN74LV245APWR
IC311	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC312	8-759-669-42	s	IC SN74LVC138APWR-12
IC313	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC314	6-707-862-01	s	IC TC74VHC05FT(EKJ)
IC315	8-759-585-55	s	IC SN74LVC540APWR
IC316	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC320	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC321	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC322	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC323	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC324	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC325	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC326	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC327	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC328	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC329	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC330	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC401	6-703-624-01	s	IC UPD72874GC-YEB

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC402	6-710-018-01	s	IC CAT24C02WI-GT3
IC403	6-700-591-01	s	IC TSB41LV06APZP
IC501	6-703-319-01	s	IC EPM7128AETC100-10N
IC502	6-707-621-01	s	IC S29AL016D70TFI020
IC503	6-707-621-01	s	IC S29AL016D70TFI020
IC504	6-700-419-01	s	IC CY7C024AV-25AXC
IC505	6-700-419-01	s	IC CY7C024AV-25AXC
IC508	6-710-018-01	s	IC CAT24C02WI-GT3
IC512	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC513	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC514	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC515	8-759-549-15	s	IC SN74LV245APWR
IC602	6-705-039-01	s	IC 93LC46BT-I/SN
IC605	8-759-669-44	s	IC SN74LVC74APWR-12
IC606	8-759-675-47	s	IC SN74LVC04APWR
IC607	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-703-319-01	s	IC EPM7128AETC100-10N
IC702	6-707-621-01	s	IC S29AL016D70TFI020
IC703	6-707-621-01	s	IC S29AL016D70TFI020
IC704	6-700-419-01	s	IC CY7C024AV-25AXC
IC705	6-700-419-01	s	IC CY7C024AV-25AXC
IC708	6-710-018-01	s	IC CAT24C02WI-GT3
IC712	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC713	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC714	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC715	8-759-549-15	s	IC SN74LV245APWR
IC753	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC754	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC755	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC802	6-705-039-01	s	IC 93LC46BT-I/SN
IC803	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC804	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC913	8-759-549-15	s	IC SN74LV245APWR
IC914	8-752-392-03	s	IC CXD1095BR
IC1011	8-759-714-00	s	IC LT1576CS8#TR
IC1012	6-700-648-01	s	IC LTC1929CG#TR
IC1021	8-759-549-15	s	IC SN74LV245APWR
IC1102	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC1103	6-707-858-01	s	IC TC74VHC00FT(EKJ)
IC1107	8-759-644-10	s	IC MAX3491CSD+TG068
IC1108	8-759-644-10	s	IC MAX3491CSD+TG068
IC1109	8-759-644-10	s	IC MAX3491CSD+TG068
IC1110	8-759-644-10	s	IC MAX3491CSD+TG068
IC1111	8-759-484-69	s	IC MAX3221CAE+TG068
IC1116	8-759-484-69	s	IC MAX3221CAE+TG068
IC1117	8-759-644-10	s	IC MAX3491CSD+TG068
IC1118	8-759-644-10	s	IC MAX3491CSD+TG068
IC1501	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1502	6-707-868-01	s	IC TC74VHC138FT(EKJ)
IC1601	8-759-472-59	s	IC 74VHC541MTCX
IC1602	8-759-472-59	s	IC 74VHC541MTCX
IC1603	8-759-392-77	s	IC SN74LVC245APWR
IC1604	8-759-669-42	s	IC SN74LVC138APWR-12
IC1605	8-759-523-93	s	IC TC74VHC27FT(EL)
IC1701	8-759-639-86	s	IC SN65LVDS32DR
IC1702	6-707-858-01	s	IC TC74VHC00FT(EKJ)
L1	1-469-060-21	s	INDUCTOR
L2	1-469-060-21	s	INDUCTOR

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L801	1-469-294-21	s	COIL, 1394 COMMON MODE
L810	1-469-294-21	s	COIL, 1394 COMMON MODE
L811	1-469-294-21	s	COIL, 1394 COMMON MODE
L1301	1-469-530-21	s	INDUCTOR, (SMD) 47UH
PS1	⚠ 1-576-124-21	s	LINK, IC (1A/72V)
Q1	8-729-052-19	s	TRANSISTOR FDS6680A
Q2	8-729-052-19	s	TRANSISTOR FDS6680A
Q3	8-729-052-19	s	TRANSISTOR FDS6680A
Q4	8-729-052-19	s	TRANSISTOR FDS6680A
Q301	8-729-114-84	s	TRANSISTOR 2SB962Z-E2-E
Q302	8-729-120-12	s	TRANSISTOR 2SC1623-T1-L5L6
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q409	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q410	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q411	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q412	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q413	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q414	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q415	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q416	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q417	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q418	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q419	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q420	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q421	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q422	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q751	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R101	1-218-823-91	s	RES, CHIP 100 (1608)
R102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R106	1-218-895-91	s	RES, CHIP 100K (1608)
R107	1-218-895-91	s	RES, CHIP 100K (1608)
R108	1-211-977-91	s	RES, CHIP 22 (1608)
R109	1-211-977-91	s	RES, CHIP 22 (1608)
R110	1-218-823-91	s	RES, CHIP 100 (1608)
R201	1-218-871-91	s	RES, CHIP 10K (1608)
R202	1-218-871-91	s	RES, CHIP 10K (1608)
R203	1-218-871-91	s	RES, CHIP 10K (1608)
R204	1-218-871-91	s	RES, CHIP 10K (1608)
R205	1-218-871-91	s	RES, CHIP 10K (1608)
R206	1-218-871-91	s	RES, CHIP 10K (1608)
R207	1-218-871-91	s	RES, CHIP 10K (1608)
R208	1-211-977-91	s	RES, CHIP 22 (1608)
R209	1-218-863-91	s	RES, CHIP 4.7K (1608)
R210	1-218-863-91	s	RES, CHIP 4.7K (1608)
R301	1-218-843-91	s	RES, CHIP 680 (1608)
R302	1-218-863-91	s	RES, CHIP 4.7K (1608)
R303	1-218-871-91	s	RES, CHIP 10K (1608)
R304	1-218-839-91	s	RES, CHIP 470 (1608)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R305	1-218-871-91	s	RES, CHIP 10K (1608)
R306	1-218-871-91	s	RES, CHIP 10K (1608)
R307	1-218-871-91	s	RES, CHIP 10K (1608)
R308	1-218-871-91	s	RES, CHIP 10K (1608)
R401	1-218-871-91	s	RES, CHIP 10K (1608)
R402	1-218-871-91	s	RES, CHIP 10K (1608)
R403	1-218-911-91	s	RES, CHIP 470K (1608)
R404	1-218-871-91	s	RES, CHIP 10K (1608)
R405	1-218-843-91	s	RES, CHIP 680 (1608)
R406	1-218-843-91	s	RES, CHIP 680 (1608)
R407	1-218-871-91	s	RES, CHIP 10K (1608)
R408	1-218-871-91	s	RES, CHIP 10K (1608)
R409	1-218-871-91	s	RES, CHIP 10K (1608)
R411	1-218-847-91	s	RES, CHIP 1.0K (1608)
R412	1-218-887-91	s	RES, CHIP 47K (1608)
R413	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R414	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R415	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R416	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R417	1-218-871-91	s	RES, CHIP 10K (1608)
R418	1-218-871-91	s	RES, CHIP 10K (1608)
R419	1-218-871-91	s	RES, CHIP 10K (1608)
R420	1-218-871-91	s	RES, CHIP 10K (1608)
R421	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R422	1-218-871-91	s	RES, CHIP 10K (1608)
R425	1-218-871-91	s	RES, CHIP 10K (1608)
R501	1-218-915-91	s	RES, CHIP 680K (1608)
R502	1-218-915-91	s	RES, CHIP 680K (1608)
R503	1-218-915-91	s	RES, CHIP 680K (1608)
R504	1-218-915-91	s	RES, CHIP 680K (1608)
R505	1-218-915-91	s	RES, CHIP 680K (1608)
R506	1-218-915-91	s	RES, CHIP 680K (1608)
R507	1-218-915-91	s	RES, CHIP 680K (1608)
R508	1-218-915-91	s	RES, CHIP 680K (1608)
R509	1-218-915-91	s	RES, CHIP 680K (1608)
R510	1-218-915-91	s	RES, CHIP 680K (1608)
R511	1-218-915-91	s	RES, CHIP 680K (1608)
R512	1-218-915-91	s	RES, CHIP 680K (1608)
R513	1-218-915-91	s	RES, CHIP 680K (1608)
R514	1-218-915-91	s	RES, CHIP 680K (1608)
R515	1-218-915-91	s	RES, CHIP 680K (1608)
R516	1-218-915-91	s	RES, CHIP 680K (1608)
R517	1-218-915-91	s	RES, CHIP 680K (1608)
R518	1-218-915-91	s	RES, CHIP 680K (1608)
R602	1-218-871-91	s	RES, CHIP 10K (1608)
R606	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R619	1-211-977-91	s	RES, CHIP 22 (1608)
R620	1-211-977-91	s	RES, CHIP 22 (1608)
R703	1-218-887-91	s	RES, CHIP 47K (1608)
R707	1-211-977-91	s	RES, CHIP 22 (1608)
R711	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R712	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R713	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R714	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R715	1-218-823-91	s	RES, CHIP 100 (1608)
R716	1-218-823-91	s	RES, CHIP 100 (1608)
R801	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R802	1-218-823-91	s	RES, CHIP 100 (1608)
R803	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R805	1-218-864-91	s	RES, CHIP 5.1K (1608)
R810	1-218-909-91	s	RES, CHIP 390K (1608)
R811	1-218-895-91	s	RES, CHIP 100K (1608)
R812	1-218-871-91	s	RES, CHIP 10K (1608)
R813	1-218-847-91	s	RES, CHIP 1.0K (1608)
R814	1-218-847-91	s	RES, CHIP 1.0K (1608)
R815	1-218-847-91	s	RES, CHIP 1.0K (1608)
R817	1-218-871-91	s	RES, CHIP 10K (1608)
R818	1-218-871-91	s	RES, CHIP 10K (1608)
R819	1-218-871-91	s	RES, CHIP 10K (1608)
R820	1-218-871-91	s	RES, CHIP 10K (1608)
R821	1-218-871-91	s	RES, CHIP 10K (1608)
R822	1-218-895-91	s	RES, CHIP 100K (1608)
R823	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R824	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R825	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R826	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R827	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R829	1-211-987-91	s	RES, CHIP 56 (1608)
R830	1-211-987-91	s	RES, CHIP 56 (1608)
R831	1-211-987-91	s	RES, CHIP 56 (1608)
R832	1-211-987-91	s	RES, CHIP 56 (1608)
R884	1-218-847-91	s	RES, CHIP 1.0K (1608)
R885	1-218-919-91	s	RES, CHIP 1M (1608)
R886	1-218-863-91	s	RES, CHIP 4.7K (1608)
R887	1-218-909-91	s	RES, CHIP 390K (1608)
R888	1-218-847-91	s	RES, CHIP 1.0K (1608)
R889	1-218-847-91	s	RES, CHIP 1.0K (1608)
R890	1-218-847-91	s	RES, CHIP 1.0K (1608)
R891	1-218-871-91	s	RES, CHIP 10K (1608)
R892	1-218-871-91	s	RES, CHIP 10K (1608)
R893	1-218-871-91	s	RES, CHIP 10K (1608)
R894	1-218-871-91	s	RES, CHIP 10K (1608)
R895	1-218-847-91	s	RES, CHIP 1.0K (1608)
R896	1-218-847-91	s	RES, CHIP 1.0K (1608)
R897	1-218-864-91	s	RES, CHIP 5.1K (1608)
R898	1-211-987-91	s	RES, CHIP 56 (1608)
R899	1-211-987-91	s	RES, CHIP 56 (1608)
R900	1-211-987-91	s	RES, CHIP 56 (1608)
R901	1-211-987-91	s	RES, CHIP 56 (1608)
R902	1-211-987-91	s	RES, CHIP 56 (1608)
R903	1-211-987-91	s	RES, CHIP 56 (1608)
R904	1-218-864-91	s	RES, CHIP 5.1K (1608)
R907	1-211-987-91	s	RES, CHIP 56 (1608)
R908	1-211-987-91	s	RES, CHIP 56 (1608)
R929	1-218-843-91	s	RES, CHIP 680 (1608)
R930	1-218-871-91	s	RES, CHIP 10K (1608)
R950	1-218-823-91	s	RES, CHIP 100 (1608)
R951	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R952	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R953	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R954	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R955	1-218-871-91	s	RES, CHIP 10K (1608)
R956	1-218-871-91	s	RES, CHIP 10K (1608)
R957	1-218-871-91	s	RES, CHIP 10K (1608)
R958	1-218-871-91	s	RES, CHIP 10K (1608)
R959	1-218-871-91	s	RES, CHIP 10K (1608)
R960	1-218-871-91	s	RES, CHIP 10K (1608)
R1001	1-218-823-91	s	RES, CHIP 100 (1608)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1002	1-218-871-91	s	RES, CHIP 10K (1608)
R1003	1-218-871-91	s	RES, CHIP 10K (1608)
R1004	1-218-871-91	s	RES, CHIP 10K (1608)
R1005	1-211-977-91	s	RES, CHIP 22 (1608)
R1006	1-211-977-91	s	RES, CHIP 22 (1608)
R1007	1-211-977-91	s	RES, CHIP 22 (1608)
R1008	1-211-977-91	s	RES, CHIP 22 (1608)
R1009	1-218-839-91	s	RES, CHIP 470 (1608)
R1010	1-218-839-91	s	RES, CHIP 470 (1608)
R1011	1-218-823-91	s	RES, CHIP 100 (1608)
R1012	1-218-823-91	s	RES, CHIP 100 (1608)
R1013	1-218-839-91	s	RES, CHIP 470 (1608)
R1014	1-218-839-91	s	RES, CHIP 470 (1608)
R1015	1-218-827-91	s	RES, CHIP 150 (1608)
R1016	1-218-839-91	s	RES, CHIP 470 (1608)
R1017	1-218-871-91	s	RES, CHIP 10K (1608)
R1018	1-218-871-91	s	RES, CHIP 10K (1608)
R1021	1-211-977-91	s	RES, CHIP 22 (1608)
R1022	1-218-831-91	s	RES, CHIP 220 (1608)
R1024	1-218-839-91	s	RES, CHIP 470 (1608)
R1025	1-218-839-91	s	RES, CHIP 470 (1608)
R1101	1-218-823-91	s	RES, CHIP 100 (1608)
R1102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1106	1-218-871-91	s	RES, CHIP 10K (1608)
R1107	1-218-871-91	s	RES, CHIP 10K (1608)
R1108	1-218-871-91	s	RES, CHIP 10K (1608)
R1109	1-218-871-91	s	RES, CHIP 10K (1608)
R1110	1-218-871-91	s	RES, CHIP 10K (1608)
R1111	1-218-871-91	s	RES, CHIP 10K (1608)
R1201	1-218-823-91	s	RES, CHIP 100 (1608)
R1202	1-218-871-91	s	RES, CHIP 10K (1608)
R1203	1-218-871-91	s	RES, CHIP 10K (1608)
R1204	1-218-871-91	s	RES, CHIP 10K (1608)
R1205	1-218-839-91	s	RES, CHIP 470 (1608)
R1206	1-218-839-91	s	RES, CHIP 470 (1608)
R1207	1-218-839-91	s	RES, CHIP 470 (1608)
R1208	1-218-839-91	s	RES, CHIP 470 (1608)
R1209	1-218-823-91	s	RES, CHIP 100 (1608)
R1210	1-218-823-91	s	RES, CHIP 100 (1608)
R1211	1-218-827-91	s	RES, CHIP 150 (1608)
R1212	1-218-839-91	s	RES, CHIP 470 (1608)
R1213	1-218-871-91	s	RES, CHIP 10K (1608)
R1214	1-218-871-91	s	RES, CHIP 10K (1608)
R1218	1-211-977-91	s	RES, CHIP 22 (1608)
R1219	1-218-831-91	s	RES, CHIP 220 (1608)
R1221	1-218-839-91	s	RES, CHIP 470 (1608)
R1222	1-218-839-91	s	RES, CHIP 470 (1608)
R1301	1-218-871-91	s	RES, CHIP 10K (1608)
R1302	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1303	1-218-839-91	s	RES, CHIP 470 (1608)
R1304	1-218-879-91	s	RES, CHIP 22K (1608)
R1305	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1306	1-218-919-91	s	RES, CHIP 1M (1608)
R1307	1-218-831-91	s	RES, CHIP 220 (1608)
R1308	1-218-887-91	s	RES, CHIP 47K (1608)
R1309	1-218-879-91	s	RES, CHIP 22K (1608)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1310	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1311	1-218-871-91	s	RES, CHIP 10K (1608)
R1312	1-218-871-91	s	RES, CHIP 10K (1608)
R1313	1-211-969-91	s	RES, CHIP 10 (1608)
R1314	1-218-871-91	s	RES, CHIP 10K (1608)
R1315	1-218-871-91	s	RES, CHIP 10K (1608)
R1316	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1317	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1318	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1319	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1320	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1321	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1322	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1323	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1324	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1325	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1326	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1327	1-218-847-91	s	RES, CHIP 1.0K (1608)
R1328	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1329	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1401	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1402	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1403	1-218-871-91	s	RES, CHIP 10K (1608)
R1404	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1406	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1407	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1409	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1414	1-218-871-91	s	RES, CHIP 10K (1608)
R1415	1-218-871-91	s	RES, CHIP 10K (1608)
R1424	1-218-871-91	s	RES, CHIP 10K (1608)
R1425	1-218-871-91	s	RES, CHIP 10K (1608)
R1427	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1428	1-218-871-91	s	RES, CHIP 10K (1608)
R1430	1-218-871-91	s	RES, CHIP 10K (1608)
R1431	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1501	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1502	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1503	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1504	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1513	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1701	1-218-823-91	s	RES, CHIP 100 (1608)
R1702	1-211-977-91	s	RES, CHIP 22 (1608)
R1703	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1704	1-218-871-91	s	RES, CHIP 10K (1608)
R1706	1-218-823-91	s	RES, CHIP 100 (1608)
R1707	1-211-977-91	s	RES, CHIP 22 (1608)
RB101	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB102	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB103	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB104	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB105	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB106	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB107	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB108	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB109	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB110	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB111	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB112	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB113	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB114	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB115	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB116	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB117	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB118	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB119	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB201	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB202	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB203	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB204	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB205	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB206	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB207	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB208	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB209	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB210	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB211	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB212	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB215	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB216	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB301	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB302	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB303	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB304	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB305	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB306	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB307	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB308	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB309	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB311	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB312	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB313	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB314	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB315	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB316	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB317	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB318	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB321	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB322	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB323	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB324	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB326	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB327	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB329	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB402	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB403	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB404	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB405	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB406	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB407	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB408	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB409	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB410	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB411	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB412	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB413	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB414	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB415	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB416	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB417	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB418	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB419	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB420	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB421	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB422	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB423	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB424	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB425	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB426	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB427	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB428	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB429	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB430	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB431	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB432	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB433	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB434	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB435	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB436	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB437	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB438	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB501	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB502	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB503	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB504	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB505	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB506	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB507	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB508	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB509	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB510	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB601	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB602	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB603	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB604	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB605	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB606	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB701	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB702	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB703	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB704	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB705	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB706	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB707	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB708	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB901	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB902	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB903	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB904	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB905	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB906	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB907	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB908	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB909	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1101	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1102	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1103	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)

(CA-54CFE BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1104	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1105	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB1106	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1107	1-233-576-21	s	RES, CHIP NETWORK 100 (3216)
RB1108	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1109	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1301	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1302	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB1601	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1602	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1603	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1604	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1605	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1606	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1607	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB1608	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RY401	1-755-379-21	s	RELAY
RY402	1-755-379-21	s	RELAY
RY403	1-755-379-21	s	RELAY
RY404	1-755-379-21	s	RELAY
RY405	1-755-379-21	s	RELAY
RY406	1-755-379-21	s	RELAY
RY407	1-755-379-21	s	RELAY
RY408	1-755-379-21	s	RELAY
S101	1-692-271-41	s	SWITCH, SLIDE
S102	1-771-881-21	s	SWITCH, DIGITAL (SMD)
S103	1-771-881-21	s	SWITCH, DIGITAL (SMD)
S104	1-771-721-21	s	SWITCH, TACTILE
S401	1-771-721-21	s	SWITCH, TACTILE
S402	1-771-721-21	s	SWITCH, TACTILE
S403	1-692-270-41	s	SWITCH, SLIDE
S901	1-771-721-21	s	SWITCH, TACTILE
S902	1-692-271-41	s	SWITCH, SLIDE
S1101	1-771-721-21	s	SWITCH, TACTILE
S1102	1-692-271-41	s	SWITCH, SLIDE
TP1	1-535-877-22	s	CHIP, CHECKER
TP23	1-535-877-22	s	CHIP, CHECKER
TP1301	1-535-877-22	s	CHIP, CHECKER
X701	1-795-944-21	s	OSCILLATOR, CRYSTAL (SMD)
X801	1-813-043-11	s	VIBRATOR, CRYSTAL (24.576MHZ)
X803	1-813-043-11	s	VIBRATOR, CRYSTAL (24.576MHZ)
X1001	1-813-038-21	s	OSCILLATOR, CRYSTAL (SMD)

CN-3141 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1547-173-A	s	MOUNTED CIRCUIT BOARD, CN-3141
4pcs	3-624-821-01	s	+PSW3X6(CU,NI)
CN2	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN3	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN4	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN5	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN104	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FL1	1-239-898-22	s	FILTER, EMI (SMD)
FL2	1-239-898-22	s	FILTER, EMI (SMD)
FL3	1-239-898-22	s	FILTER, EMI (SMD)
FL4	1-239-898-22	s	FILTER, EMI (SMD)
FL5	1-239-898-22	s	FILTER, EMI (SMD)
FL6	1-239-898-22	s	FILTER, EMI (SMD)
FL7	1-239-898-22	s	FILTER, EMI (SMD)
FL8	1-239-898-22	s	FILTER, EMI (SMD)
LF51	1-456-826-11	s	COIL, COMMON MODE CHOKE
LF52	1-456-826-11	s	COIL, COMMON MODE CHOKE
LF151	1-456-826-11	s	COIL, COMMON MODE CHOKE
LF152	1-456-826-11	s	COIL, COMMON MODE CHOKE
Q5	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q6	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q101	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R18	1-208-855-81	s	RES, CHIP 47 (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R28	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R29	1-208-855-81	s	RES, CHIP 47 (1005)
R30	1-208-855-81	s	RES, CHIP 47 (1005)
R31	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R33	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R37	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R42	1-208-903-81	s	RES, CHIP 4.7K (1005)
R43	1-208-903-81	s	RES, CHIP 4.7K (1005)
R110	1-208-855-81	s	RES, CHIP 47 (1005)
R111	1-208-855-81	s	RES, CHIP 47 (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-218-990-81	s	CONDUCTOR, CHIP (1005)

CN-3147 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1551-022-A	s	MOUNTED CIRCUIT BOARD, CN-3147
1pc	2-655-586-01	s	SCREW +B M2.6 EG
4pcs	3-624-821-01	s	+PSW3X6(CU,NI)
2pcs	3-637-896-04	s	SCREW,STEP(+B3X14)
1pc	3-637-901-02	s	SCREW M2.6X5
1pc	7-623-924-11	s	WASHER 3.0, NYLON
1pc	7-623-924-11	s	WASHER 3.0, NYLON
1pc	X-360-835-06	s	PC BOARD LEVER ASSY(L)
1pc	X-360-835-15	s	PC BOARD LEVER ASSY(R)
C1	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C2	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C3	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C4	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C5	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C10	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C11	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C12	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN2	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN3	1-822-629-11	s	MODULAR JACK(LOW PROFILE GIGA)
CN4	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN5	1-573-566-11	s	CONNECTOR, D-SUB(ANGLE TYPE)9P
CN6	1-750-890-11	s	CONNECTOR,D-SUB(ANGLE TYPE)25P
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-069-28	s	DIODE 1SS400TE-61
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB2	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB3	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB4	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB5	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB6	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB7	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB8	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB9	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB10	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB11	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB12	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB13	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB14	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FL1	1-239-898-22	s	FILTER, EMI (SMD)
FL2	1-239-898-22	s	FILTER, EMI (SMD)
FL3	1-239-898-22	s	FILTER, EMI (SMD)
FL4	1-239-898-22	s	FILTER, EMI (SMD)
FL5	1-239-898-22	s	FILTER, EMI (SMD)
FL6	1-239-898-22	s	FILTER, EMI (SMD)
FL7	1-239-898-22	s	FILTER, EMI (SMD)
FL8	1-239-898-22	s	FILTER, EMI (SMD)
FL9	1-239-898-22	s	FILTER, EMI (SMD)
FL10	1-239-898-22	s	FILTER, EMI (SMD)
FL11	1-239-898-22	s	FILTER, EMI (SMD)

(CN-3147 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FL12	1-239-898-22	s	FILTER, EMI (SMD)
FL13	1-239-898-22	s	FILTER, EMI (SMD)
FL14	1-239-898-22	s	FILTER, EMI (SMD)
FL15	1-239-898-22	s	FILTER, EMI (SMD)
FL16	1-239-898-22	s	FILTER, EMI (SMD)
IC1	6-700-792-01	s	IC NJM78M09DL1A(TE1)
L1	1-416-511-21	s	COIL, CHOKE 47.0UH
L2	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L3	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
LF51	1-456-826-11	s	COIL, COMMON MODE CHOKE
LF52	1-456-826-11	s	COIL, COMMON MODE CHOKE
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q2	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q3	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q4	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q5	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q6	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R3	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4	1-208-855-81	s	RES, CHIP 47 (1005)
R5	1-208-927-81	s	RES, CHIP 47K (1005)
R6	1-208-903-81	s	RES, CHIP 4.7K (1005)
R7	1-208-927-81	s	RES, CHIP 47K (1005)
R8	1-208-879-81	s	RES, CHIP 470 (1005)
R9	1-208-879-81	s	RES, CHIP 470 (1005)
R10	1-208-887-81	s	RES, CHIP 1.0K (1005)
R11	1-208-879-81	s	RES, CHIP 470 (1005)
R12	1-208-887-81	s	RES, CHIP 1.0K (1005)
R13	1-208-879-81	s	RES, CHIP 470 (1005)
R14	1-208-887-81	s	RES, CHIP 1.0K (1005)
R15	1-208-855-81	s	RES, CHIP 47 (1005)
R16	1-208-855-81	s	RES, CHIP 47 (1005)
R17	1-208-855-81	s	RES, CHIP 47 (1005)
R18	1-208-855-81	s	RES, CHIP 47 (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R28	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R29	1-208-855-81	s	RES, CHIP 47 (1005)
R30	1-208-855-81	s	RES, CHIP 47 (1005)
R31	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R33	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R37	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R39	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R40	1-208-935-81	s	RES, CHIP 100K (1005)
R41	1-208-935-81	s	RES, CHIP 100K (1005)
R42	1-208-903-81	s	RES, CHIP 4.7K (1005)
R43	1-208-903-81	s	RES, CHIP 4.7K (1005)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER

CNI-32 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
9pcs	2-655-586-01	s	SCREW +B M2.6 EG
2pcs	3-637-896-04	s	SCREW,STEP(+B3X14)
9pcs	3-637-901-02	s	SCREW M2.6X5
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C5	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C6	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C7	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C8	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C13	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C14	1-100-986-21	s	CAP, ELECT 330MF
C15	1-100-986-21	s	CAP, ELECT 330MF
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-100-986-21	s	CAP, ELECT 330MF
C19	1-100-986-21	s	CAP, ELECT 330MF
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C23	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C24	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C25	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C26	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C27	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C28	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C29	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C106	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C107	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C108	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C109	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C110	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C111	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C112	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C113	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C115	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C117	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C119	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C138	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C139	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C140	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C141	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C142	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C143	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C144	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C145	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C146	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C147	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C148	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C149	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C150	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C151	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C152	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C158	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C159	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C160	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C161	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C162	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C163	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C164	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C165	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C167	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C169	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C171	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C189	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C190	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C191	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C192	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C193	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C194	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C195	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C196	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C197	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C198	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C199	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C200	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C201	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C202	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C203	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C204	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C306	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C307	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C308	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C309	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C310	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C311	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C312	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C313	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C315	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C317	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C319	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C338	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C339	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C340	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C341	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C342	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C343	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C344	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C345	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C346	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C347	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C348	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C349	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C350	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C351	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C352	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C359	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C360	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C361	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C362	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C363	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C364	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C365	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C366	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C367	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C368	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C370	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C372	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C374	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C376	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C382	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C384	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C386	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C387	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C388	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C389	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C392	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C394	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C395	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C396	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C397	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C398	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C399	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C400	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C401	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C402	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C403	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C404	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C405	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C406	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C407	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C408	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C409	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C410	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C411	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C412	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C413	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C414	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C415	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C416	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C417	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN15	1-819-994-11	s	CONNECTOR, COAXIAL(BNC TRIPLE)
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-072-43	s	DIODE RB050L-40TE25
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
D5	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC101	6-702-620-01	s	IC GS1524-CKDE3
IC102	6-702-620-01	s	IC GS1524-CKDE3
IC103	6-702-620-01	s	IC GS1524-CKDE3
IC104	6-702-620-01	s	IC GS1524-CKDE3
IC105	6-702-535-01	s	IC MC100LVEL11DTR2
IC106	6-702-535-01	s	IC MC100LVEL11DTR2
IC107	6-702-535-01	s	IC MC100LVEL11DTR2
IC108	6-702-535-01	s	IC MC100LVEL11DTR2
IC109	6-702-620-01	s	IC GS1524-CKDE3
IC110	6-702-620-01	s	IC GS1524-CKDE3
IC111	6-702-620-01	s	IC GS1524-CKDE3
IC112	6-702-620-01	s	IC GS1524-CKDE3
IC113	6-702-535-01	s	IC MC100LVEL11DTR2
IC114	6-702-535-01	s	IC MC100LVEL11DTR2
IC115	6-702-535-01	s	IC MC100LVEL11DTR2
IC116	6-702-535-01	s	IC MC100LVEL11DTR2
IC301	6-702-620-01	s	IC GS1524-CKDE3
IC302	6-702-620-01	s	IC GS1524-CKDE3
IC303	6-702-620-01	s	IC GS1524-CKDE3
IC304	6-702-620-01	s	IC GS1524-CKDE3
IC305	6-702-535-01	s	IC MC100LVEL11DTR2
IC306	6-702-535-01	s	IC MC100LVEL11DTR2
IC307	6-702-535-01	s	IC MC100LVEL11DTR2
IC308	6-702-535-01	s	IC MC100LVEL11DTR2
IC309	6-702-620-01	s	IC GS1524-CKDE3
IC310	6-702-620-01	s	IC GS1524-CKDE3
IC311	6-702-620-01	s	IC GS1524-CKDE3
IC312	6-702-620-01	s	IC GS1524-CKDE3
IC313	6-702-620-01	s	IC GS1524-CKDE3
IC314	6-702-535-01	s	IC MC100LVEL11DTR2
IC315	6-702-535-01	s	IC MC100LVEL11DTR2
IC316	6-702-535-01	s	IC MC100LVEL11DTR2
IC317	6-702-535-01	s	IC MC100LVEL11DTR2
IC318	6-702-535-01	s	IC MC100LVEL11DTR2
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-419-491-21	s	COIL, CHOKE 10UH
L3	1-400-175-21	s	COIL, CHOKE 47UH
L4	1-400-175-21	s	COIL, CHOKE 47UH
L5	1-419-491-21	s	COIL, CHOKE 10UH

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L6	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L102	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L103	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L104	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L105	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L106	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L107	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L108	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L301	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L302	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L303	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L304	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L305	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L306	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L307	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L308	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
L309	1-414-839-21	s	INDUCTOR, CHIP 8.2NH (1005)
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS2	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS3	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q7	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q8	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q9	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q10	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-863-81	s	RES, CHIP 100 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-871-81	s	RES, CHIP 220 (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-919-81	s	RES, CHIP 22K (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)
R16	1-208-919-81	s	RES, CHIP 22K (1005)
R17	1-208-927-81	s	RES, CHIP 47K (1005)
R18	1-208-911-81	s	RES, CHIP 10K (1005)
R19	1-208-919-81	s	RES, CHIP 22K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-911-81	s	RES, CHIP 10K (1005)
R22	1-208-855-81	s	RES, CHIP 47 (1005)
R23	1-208-863-81	s	RES, CHIP 100 (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-943-81	s	RES, CHIP 220K (1005)
R33	1-208-927-81	s	RES, CHIP 47K (1005)
R34	1-208-943-81	s	RES, CHIP 220K (1005)
R35	1-208-927-81	s	RES, CHIP 47K (1005)
R36	1-208-943-81	s	RES, CHIP 220K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-943-81	s	RES, CHIP 220K (1005)
R39	1-208-927-81	s	RES, CHIP 47K (1005)
R40	1-208-903-81	s	RES, CHIP 4.7K (1005)
R41	1-208-903-81	s	RES, CHIP 4.7K (1005)
R42	1-208-943-81	s	RES, CHIP 220K (1005)
R43	1-208-943-81	s	RES, CHIP 220K (1005)
R44	1-208-935-81	s	RES, CHIP 100K (1005)
R45	1-208-927-81	s	RES, CHIP 47K (1005)
R46	1-208-935-81	s	RES, CHIP 100K (1005)
R47	1-208-927-81	s	RES, CHIP 47K (1005)
R48	1-208-919-81	s	RES, CHIP 22K (1005)
R49	1-208-943-81	s	RES, CHIP 220K (1005)
R50	1-208-927-81	s	RES, CHIP 47K (1005)
R51	1-208-943-81	s	RES, CHIP 220K (1005)
R52	1-208-927-81	s	RES, CHIP 47K (1005)
R53	1-208-871-81	s	RES, CHIP 220 (1005)
R54	1-208-871-81	s	RES, CHIP 220 (1005)
R105	1-208-860-81	s	RES, CHIP 75 (1005)
R106	1-208-860-81	s	RES, CHIP 75 (1005)
R107	1-208-860-81	s	RES, CHIP 75 (1005)
R108	1-208-860-81	s	RES, CHIP 75 (1005)
R117	1-220-883-81	s	RES, CHIP 36 (1005)
R118	1-220-883-81	s	RES, CHIP 36 (1005)
R119	1-220-883-81	s	RES, CHIP 36 (1005)
R120	1-220-883-81	s	RES, CHIP 36 (1005)
R121	1-208-860-81	s	RES, CHIP 75 (1005)
R122	1-208-860-81	s	RES, CHIP 75 (1005)
R123	1-208-860-81	s	RES, CHIP 75 (1005)
R124	1-208-860-81	s	RES, CHIP 75 (1005)
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R126	1-208-887-81	s	RES, CHIP 1.0K (1005)
R127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R133	1-220-870-81	s	RES, CHIP 10 (1005)
R134	1-220-870-81	s	RES, CHIP 10 (1005)
R135	1-220-870-81	s	RES, CHIP 10 (1005)
R136	1-220-870-81	s	RES, CHIP 10 (1005)
R137	1-220-870-81	s	RES, CHIP 10 (1005)
R138	1-220-870-81	s	RES, CHIP 10 (1005)
R139	1-220-870-81	s	RES, CHIP 10 (1005)
R140	1-220-870-81	s	RES, CHIP 10 (1005)
R141	1-208-855-81	s	RES, CHIP 47 (1005)
R142	1-208-855-81	s	RES, CHIP 47 (1005)
R143	1-208-855-81	s	RES, CHIP 47 (1005)
R144	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R145	1-208-855-81	s	RES, CHIP 47 (1005)
R146	1-208-855-81	s	RES, CHIP 47 (1005)
R147	1-208-855-81	s	RES, CHIP 47 (1005)
R148	1-208-855-81	s	RES, CHIP 47 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-220-878-81	s	RES, CHIP 22 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-220-878-81	s	RES, CHIP 22 (1005)
R160	1-220-878-81	s	RES, CHIP 22 (1005)
R161	1-220-878-81	s	RES, CHIP 22 (1005)
R162	1-220-878-81	s	RES, CHIP 22 (1005)
R163	1-220-878-81	s	RES, CHIP 22 (1005)
R164	1-220-878-81	s	RES, CHIP 22 (1005)
R165	1-208-875-81	s	RES, CHIP 330 (1005)
R166	1-208-875-81	s	RES, CHIP 330 (1005)
R167	1-208-875-81	s	RES, CHIP 330 (1005)
R168	1-208-875-81	s	RES, CHIP 330 (1005)
R169	1-208-875-81	s	RES, CHIP 330 (1005)
R170	1-208-875-81	s	RES, CHIP 330 (1005)
R171	1-208-875-81	s	RES, CHIP 330 (1005)
R172	1-208-875-81	s	RES, CHIP 330 (1005)
R173	1-208-875-81	s	RES, CHIP 330 (1005)
R174	1-208-875-81	s	RES, CHIP 330 (1005)
R175	1-208-875-81	s	RES, CHIP 330 (1005)
R176	1-208-875-81	s	RES, CHIP 330 (1005)
R177	1-208-875-81	s	RES, CHIP 330 (1005)
R178	1-208-875-81	s	RES, CHIP 330 (1005)
R179	1-208-875-81	s	RES, CHIP 330 (1005)
R180	1-208-875-81	s	RES, CHIP 330 (1005)
R185	1-208-860-81	s	RES, CHIP 75 (1005)
R186	1-208-860-81	s	RES, CHIP 75 (1005)
R187	1-208-860-81	s	RES, CHIP 75 (1005)
R188	1-208-860-81	s	RES, CHIP 75 (1005)
R197	1-220-883-81	s	RES, CHIP 36 (1005)
R198	1-220-883-81	s	RES, CHIP 36 (1005)
R199	1-220-883-81	s	RES, CHIP 36 (1005)
R200	1-220-883-81	s	RES, CHIP 36 (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-887-81	s	RES, CHIP 1.0K (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-220-870-81	s	RES, CHIP 10 (1005)
R214	1-220-870-81	s	RES, CHIP 10 (1005)
R215	1-220-870-81	s	RES, CHIP 10 (1005)

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R216	1-220-870-81	s	RES, CHIP 10 (1005)
R217	1-220-870-81	s	RES, CHIP 10 (1005)
R218	1-220-870-81	s	RES, CHIP 10 (1005)
R219	1-220-870-81	s	RES, CHIP 10 (1005)
R220	1-220-870-81	s	RES, CHIP 10 (1005)
R221	1-208-855-81	s	RES, CHIP 47 (1005)
R222	1-208-855-81	s	RES, CHIP 47 (1005)
R223	1-208-855-81	s	RES, CHIP 47 (1005)
R224	1-208-855-81	s	RES, CHIP 47 (1005)
R225	1-208-855-81	s	RES, CHIP 47 (1005)
R226	1-208-855-81	s	RES, CHIP 47 (1005)
R227	1-208-855-81	s	RES, CHIP 47 (1005)
R228	1-208-855-81	s	RES, CHIP 47 (1005)
R229	1-220-878-81	s	RES, CHIP 22 (1005)
R230	1-220-878-81	s	RES, CHIP 22 (1005)
R231	1-220-878-81	s	RES, CHIP 22 (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R237	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-220-878-81	s	RES, CHIP 22 (1005)
R239	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-220-878-81	s	RES, CHIP 22 (1005)
R241	1-220-878-81	s	RES, CHIP 22 (1005)
R242	1-220-878-81	s	RES, CHIP 22 (1005)
R243	1-220-878-81	s	RES, CHIP 22 (1005)
R244	1-220-878-81	s	RES, CHIP 22 (1005)
R245	1-208-875-81	s	RES, CHIP 330 (1005)
R246	1-208-875-81	s	RES, CHIP 330 (1005)
R247	1-208-875-81	s	RES, CHIP 330 (1005)
R248	1-208-875-81	s	RES, CHIP 330 (1005)
R249	1-208-875-81	s	RES, CHIP 330 (1005)
R250	1-208-875-81	s	RES, CHIP 330 (1005)
R251	1-208-875-81	s	RES, CHIP 330 (1005)
R252	1-208-875-81	s	RES, CHIP 330 (1005)
R253	1-208-875-81	s	RES, CHIP 330 (1005)
R254	1-208-875-81	s	RES, CHIP 330 (1005)
R255	1-208-875-81	s	RES, CHIP 330 (1005)
R256	1-208-875-81	s	RES, CHIP 330 (1005)
R257	1-208-875-81	s	RES, CHIP 330 (1005)
R258	1-208-875-81	s	RES, CHIP 330 (1005)
R259	1-208-875-81	s	RES, CHIP 330 (1005)
R260	1-208-875-81	s	RES, CHIP 330 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-860-81	s	RES, CHIP 75 (1005)
R317	1-220-883-81	s	RES, CHIP 36 (1005)
R318	1-220-883-81	s	RES, CHIP 36 (1005)
R319	1-220-883-81	s	RES, CHIP 36 (1005)
R320	1-220-883-81	s	RES, CHIP 36 (1005)
R321	1-208-860-81	s	RES, CHIP 75 (1005)
R322	1-208-860-81	s	RES, CHIP 75 (1005)
R323	1-208-860-81	s	RES, CHIP 75 (1005)
R324	1-208-860-81	s	RES, CHIP 75 (1005)
R325	1-208-887-81	s	RES, CHIP 1.0K (1005)
R326	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R327	1-208-887-81	s	RES, CHIP 1.0K (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R333	1-220-870-81	s	RES, CHIP 10 (1005)
R334	1-220-870-81	s	RES, CHIP 10 (1005)
R335	1-220-870-81	s	RES, CHIP 10 (1005)
R336	1-220-870-81	s	RES, CHIP 10 (1005)
R337	1-220-870-81	s	RES, CHIP 10 (1005)
R338	1-220-870-81	s	RES, CHIP 10 (1005)
R339	1-220-870-81	s	RES, CHIP 10 (1005)
R340	1-220-870-81	s	RES, CHIP 10 (1005)
R341	1-208-855-81	s	RES, CHIP 47 (1005)
R342	1-208-855-81	s	RES, CHIP 47 (1005)
R343	1-208-855-81	s	RES, CHIP 47 (1005)
R344	1-208-855-81	s	RES, CHIP 47 (1005)
R345	1-208-855-81	s	RES, CHIP 47 (1005)
R346	1-208-855-81	s	RES, CHIP 47 (1005)
R347	1-208-855-81	s	RES, CHIP 47 (1005)
R348	1-208-855-81	s	RES, CHIP 47 (1005)
R349	1-220-878-81	s	RES, CHIP 22 (1005)
R350	1-220-878-81	s	RES, CHIP 22 (1005)
R351	1-220-878-81	s	RES, CHIP 22 (1005)
R352	1-220-878-81	s	RES, CHIP 22 (1005)
R353	1-220-878-81	s	RES, CHIP 22 (1005)
R354	1-220-878-81	s	RES, CHIP 22 (1005)
R355	1-220-878-81	s	RES, CHIP 22 (1005)
R356	1-220-878-81	s	RES, CHIP 22 (1005)
R357	1-220-878-81	s	RES, CHIP 22 (1005)
R358	1-220-878-81	s	RES, CHIP 22 (1005)
R359	1-220-878-81	s	RES, CHIP 22 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R361	1-220-878-81	s	RES, CHIP 22 (1005)
R362	1-220-878-81	s	RES, CHIP 22 (1005)
R363	1-220-878-81	s	RES, CHIP 22 (1005)
R364	1-220-878-81	s	RES, CHIP 22 (1005)
R365	1-208-875-81	s	RES, CHIP 330 (1005)
R366	1-208-875-81	s	RES, CHIP 330 (1005)
R367	1-208-875-81	s	RES, CHIP 330 (1005)
R368	1-208-875-81	s	RES, CHIP 330 (1005)
R369	1-208-875-81	s	RES, CHIP 330 (1005)
R370	1-208-875-81	s	RES, CHIP 330 (1005)
R371	1-208-875-81	s	RES, CHIP 330 (1005)
R372	1-208-875-81	s	RES, CHIP 330 (1005)
R373	1-208-875-81	s	RES, CHIP 330 (1005)
R374	1-208-875-81	s	RES, CHIP 330 (1005)
R375	1-208-875-81	s	RES, CHIP 330 (1005)
R376	1-208-875-81	s	RES, CHIP 330 (1005)
R377	1-208-875-81	s	RES, CHIP 330 (1005)
R378	1-208-875-81	s	RES, CHIP 330 (1005)
R379	1-208-875-81	s	RES, CHIP 330 (1005)
R380	1-208-875-81	s	RES, CHIP 330 (1005)
R386	1-208-860-81	s	RES, CHIP 75 (1005)
R387	1-208-860-81	s	RES, CHIP 75 (1005)
R388	1-208-860-81	s	RES, CHIP 75 (1005)
R389	1-208-860-81	s	RES, CHIP 75 (1005)
R390	1-208-860-81	s	RES, CHIP 75 (1005)

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R401	1-220-883-81	s	RES, CHIP 36 (1005)
R402	1-220-883-81	s	RES, CHIP 36 (1005)
R403	1-220-883-81	s	RES, CHIP 36 (1005)
R404	1-220-883-81	s	RES, CHIP 36 (1005)
R405	1-220-883-81	s	RES, CHIP 36 (1005)
R406	1-208-860-81	s	RES, CHIP 75 (1005)
R407	1-208-860-81	s	RES, CHIP 75 (1005)
R408	1-208-860-81	s	RES, CHIP 75 (1005)
R409	1-208-860-81	s	RES, CHIP 75 (1005)
R410	1-208-860-81	s	RES, CHIP 75 (1005)
R411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-220-870-81	s	RES, CHIP 10 (1005)
R422	1-220-870-81	s	RES, CHIP 10 (1005)
R423	1-220-870-81	s	RES, CHIP 10 (1005)
R424	1-220-870-81	s	RES, CHIP 10 (1005)
R425	1-220-870-81	s	RES, CHIP 10 (1005)
R426	1-220-870-81	s	RES, CHIP 10 (1005)
R427	1-220-870-81	s	RES, CHIP 10 (1005)
R428	1-220-870-81	s	RES, CHIP 10 (1005)
R429	1-220-870-81	s	RES, CHIP 10 (1005)
R430	1-220-870-81	s	RES, CHIP 10 (1005)
R431	1-208-855-81	s	RES, CHIP 47 (1005)
R432	1-208-855-81	s	RES, CHIP 47 (1005)
R433	1-208-855-81	s	RES, CHIP 47 (1005)
R434	1-208-855-81	s	RES, CHIP 47 (1005)
R435	1-208-855-81	s	RES, CHIP 47 (1005)
R436	1-208-855-81	s	RES, CHIP 47 (1005)
R437	1-208-855-81	s	RES, CHIP 47 (1005)
R438	1-208-855-81	s	RES, CHIP 47 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-208-855-81	s	RES, CHIP 47 (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-220-878-81	s	RES, CHIP 22 (1005)
R444	1-220-878-81	s	RES, CHIP 22 (1005)
R445	1-220-878-81	s	RES, CHIP 22 (1005)
R446	1-220-878-81	s	RES, CHIP 22 (1005)
R447	1-220-878-81	s	RES, CHIP 22 (1005)
R448	1-220-878-81	s	RES, CHIP 22 (1005)
R449	1-220-878-81	s	RES, CHIP 22 (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R451	1-220-878-81	s	RES, CHIP 22 (1005)
R452	1-220-878-81	s	RES, CHIP 22 (1005)
R453	1-220-878-81	s	RES, CHIP 22 (1005)
R454	1-220-878-81	s	RES, CHIP 22 (1005)
R455	1-220-878-81	s	RES, CHIP 22 (1005)
R456	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-220-878-81	s	RES, CHIP 22 (1005)
R458	1-220-878-81	s	RES, CHIP 22 (1005)
R459	1-220-878-81	s	RES, CHIP 22 (1005)

(CNI-32 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R460	1-220-878-81	s	RES, CHIP 22 (1005)
R461	1-208-875-81	s	RES, CHIP 330 (1005)
R462	1-208-875-81	s	RES, CHIP 330 (1005)
R463	1-208-875-81	s	RES, CHIP 330 (1005)
R464	1-208-875-81	s	RES, CHIP 330 (1005)
R465	1-208-875-81	s	RES, CHIP 330 (1005)
R466	1-208-875-81	s	RES, CHIP 330 (1005)
R467	1-208-875-81	s	RES, CHIP 330 (1005)
R468	1-208-875-81	s	RES, CHIP 330 (1005)
R469	1-208-875-81	s	RES, CHIP 330 (1005)
R470	1-208-875-81	s	RES, CHIP 330 (1005)
R471	1-208-875-81	s	RES, CHIP 330 (1005)
R472	1-208-875-81	s	RES, CHIP 330 (1005)
R473	1-208-875-81	s	RES, CHIP 330 (1005)
R474	1-208-875-81	s	RES, CHIP 330 (1005)
R475	1-208-875-81	s	RES, CHIP 330 (1005)
R476	1-208-875-81	s	RES, CHIP 330 (1005)
R477	1-208-875-81	s	RES, CHIP 330 (1005)
R478	1-208-875-81	s	RES, CHIP 330 (1005)
R479	1-208-875-81	s	RES, CHIP 330 (1005)
R480	1-208-875-81	s	RES, CHIP 330 (1005)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP3	1-535-877-22	s	CHIP, CHECKER

CNI-35 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1547-172-A	s	MOUNTED CIRCUIT BOARD, CNI-35
8pcs	2-655-586-01	s	SCREW +B M2.6 EG
8pcs	3-637-901-02	s	SCREW M2.6X5
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C5	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C6	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C7	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C8	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C9	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C12	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C13	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C14	1-100-986-21	s	CAP, ELECT 330MF
C15	1-100-986-21	s	CAP, ELECT 330MF
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-100-986-21	s	CAP, ELECT 330MF
C19	1-100-986-21	s	CAP, ELECT 330MF
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C23	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C24	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C25	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C26	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C27	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C28	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C29	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C106	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C107	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C108	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C109	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C110	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C111	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C112	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C113	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C114	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C115	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C116	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C117	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C118	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C119	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C120	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C121	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C123	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C124	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C125	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C126	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C127	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C128	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C129	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C130	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C131	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C132	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C150	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C151	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C152	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C153	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C154	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C155	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C156	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C157	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C158	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C159	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C160	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C161	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C162	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C163	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C164	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C168	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C169	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C170	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C171	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C172	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C173	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C174	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C175	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C176	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C177	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C178	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C179	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C180	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C181	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C182	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C183	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C184	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C185	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C186	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C187	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C188	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C189	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C190	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C191	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C192	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C193	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C194	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C195	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C196	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C214	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C215	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C216	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C217	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C218	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C219	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C220	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C221	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C222	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C223	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C224	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C225	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C226	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C227	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C228	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C312	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C313	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C314	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C315	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C316	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C317	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C318	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C319	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C320	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C326	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C327	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C337	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C338	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C339	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C340	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C341	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C342	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C343	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C344	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C352	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C353	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C354	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C355	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C356	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C357	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C358	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C359	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C360	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C361	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C362	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C363	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C364	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C365	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C372	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C373	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C374	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C375	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C376	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C377	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
CN1	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN3	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN5	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN7	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN9	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN11	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN13	1-819-994-11	s	CONNECTOR, COAXIAL(BNC TRIPLE)
CN301	1-785-444-11	s	CONNECTOR, SQUARE TYPE
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-072-43	s	DIODE RB050L-40TE25
D3	8-719-072-43	s	DIODE RB050L-40TE25
D4	8-719-072-43	s	DIODE RB050L-40TE25
D5	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
IC1	8-759-669-64	s	IC TL1451ACPWR-12
IC101	6-709-612-01	s	IC GS1574ACNE3
IC102	6-709-612-01	s	IC GS1574ACNE3
IC103	6-709-612-01	s	IC GS1574ACNE3
IC104	6-709-612-01	s	IC GS1574ACNE3
IC105	6-700-641-01	s	IC MC10EP56DTR2
IC106	6-700-641-01	s	IC MC10EP56DTR2
IC107	6-700-641-01	s	IC MC10EP56DTR2
IC108	6-700-641-01	s	IC MC10EP56DTR2
IC109	6-709-612-01	s	IC GS1574ACNE3
IC110	6-709-612-01	s	IC GS1574ACNE3
IC111	6-709-612-01	s	IC GS1574ACNE3
IC112	6-709-612-01	s	IC GS1574ACNE3
IC113	6-700-641-01	s	IC MC10EP56DTR2
IC114	6-700-641-01	s	IC MC10EP56DTR2
IC115	6-700-641-01	s	IC MC10EP56DTR2
IC116	6-700-641-01	s	IC MC10EP56DTR2
IC301	6-709-612-01	s	IC GS1574ACNE3
IC302	6-709-612-01	s	IC GS1574ACNE3
IC303	6-709-612-01	s	IC GS1574ACNE3
IC304	6-709-612-01	s	IC GS1574ACNE3
IC305	6-702-535-01	s	IC MC100LVEL11DTR2
IC306	6-702-535-01	s	IC MC100LVEL11DTR2
IC307	6-702-535-01	s	IC MC100LVEL11DTR2
IC308	6-702-535-01	s	IC MC100LVEL11DTR2
IC309	6-709-612-01	s	IC GS1574ACNE3
IC310	6-709-612-01	s	IC GS1574ACNE3
IC311	6-709-612-01	s	IC GS1574ACNE3
IC312	6-702-535-01	s	IC MC100LVEL11DTR2
IC313	6-702-535-01	s	IC MC100LVEL11DTR2
IC314	6-702-535-01	s	IC MC100LVEL11DTR2
L1	1-419-491-21	s	COIL, CHOKE 10UH
L2	1-419-491-21	s	COIL, CHOKE 10UH
L3	1-400-175-21	s	COIL, CHOKE 47UH
L4	1-400-175-21	s	COIL, CHOKE 47UH
L5	1-419-491-21	s	COIL, CHOKE 10UH
L6	1-419-491-21	s	COIL, CHOKE 10UH
L101	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L102	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L103	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L104	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L105	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L106	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L107	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L108	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L109	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L110	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L111	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L112	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L113	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L114	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L115	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L116	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L301	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L302	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L303	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L304	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L305	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L306	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L307	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L308	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L309	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L310	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L311	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L312	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L313	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
L314	1-469-553-21	s	INDUCTOR, CHIP 4.7UH (LB2016)
LF301	1-456-826-11	s	COIL, COMMON MODE CHOKE
PS1	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS2	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS3	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q2	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q6	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q7	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q8	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q9	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q10	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-863-81	s	RES, CHIP 100 (1005)
R3	1-208-871-81	s	RES, CHIP 220 (1005)
R4	1-208-863-81	s	RES, CHIP 100 (1005)
R5	1-208-871-81	s	RES, CHIP 220 (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-871-81	s	RES, CHIP 220 (1005)
R8	1-208-927-81	s	RES, CHIP 47K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-871-81	s	RES, CHIP 220 (1005)
R11	1-208-927-81	s	RES, CHIP 47K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-919-81	s	RES, CHIP 22K (1005)
R15	1-208-919-81	s	RES, CHIP 22K (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R16	1-208-919-81	s	RES, CHIP 22K (1005)
R17	1-208-927-81	s	RES, CHIP 47K (1005)
R18	1-208-911-81	s	RES, CHIP 10K (1005)
R19	1-208-919-81	s	RES, CHIP 22K (1005)
R20	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-911-81	s	RES, CHIP 10K (1005)
R22	1-208-855-81	s	RES, CHIP 47 (1005)
R23	1-208-863-81	s	RES, CHIP 100 (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-208-863-81	s	RES, CHIP 100 (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R31	1-208-903-81	s	RES, CHIP 4.7K (1005)
R32	1-208-943-81	s	RES, CHIP 220K (1005)
R33	1-208-927-81	s	RES, CHIP 47K (1005)
R34	1-208-943-81	s	RES, CHIP 220K (1005)
R35	1-208-927-81	s	RES, CHIP 47K (1005)
R36	1-208-943-81	s	RES, CHIP 220K (1005)
R37	1-208-927-81	s	RES, CHIP 47K (1005)
R38	1-208-943-81	s	RES, CHIP 220K (1005)
R39	1-208-927-81	s	RES, CHIP 47K (1005)
R40	1-208-903-81	s	RES, CHIP 4.7K (1005)
R41	1-208-903-81	s	RES, CHIP 4.7K (1005)
R42	1-208-943-81	s	RES, CHIP 220K (1005)
R43	1-208-943-81	s	RES, CHIP 220K (1005)
R44	1-208-935-81	s	RES, CHIP 100K (1005)
R45	1-208-927-81	s	RES, CHIP 47K (1005)
R46	1-208-935-81	s	RES, CHIP 100K (1005)
R47	1-208-927-81	s	RES, CHIP 47K (1005)
R48	1-208-919-81	s	RES, CHIP 22K (1005)
R49	1-208-943-81	s	RES, CHIP 220K (1005)
R50	1-208-927-81	s	RES, CHIP 47K (1005)
R51	1-208-943-81	s	RES, CHIP 220K (1005)
R52	1-208-927-81	s	RES, CHIP 47K (1005)
R53	1-208-871-81	s	RES, CHIP 220 (1005)
R54	1-208-871-81	s	RES, CHIP 220 (1005)
R101	1-208-860-81	s	RES, CHIP 75 (1005)
R102	1-208-860-81	s	RES, CHIP 75 (1005)
R103	1-208-860-81	s	RES, CHIP 75 (1005)
R104	1-208-860-81	s	RES, CHIP 75 (1005)
R105	1-208-860-81	s	RES, CHIP 75 (1005)
R106	1-208-860-81	s	RES, CHIP 75 (1005)
R107	1-208-860-81	s	RES, CHIP 75 (1005)
R108	1-208-860-81	s	RES, CHIP 75 (1005)
R109	1-220-884-81	s	RES, CHIP 39 (1005)
R110	1-220-884-81	s	RES, CHIP 39 (1005)
R111	1-220-884-81	s	RES, CHIP 39 (1005)
R112	1-220-884-81	s	RES, CHIP 39 (1005)
R117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R119	1-208-887-81	s	RES, CHIP 1.0K (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R122	1-208-887-81	s	RES, CHIP 1.0K (1005)
R123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R132	1-208-887-81	s	RES, CHIP 1.0K (1005)
R133	1-208-863-81	s	RES, CHIP 100 (1005)
R134	1-208-863-81	s	RES, CHIP 100 (1005)
R135	1-208-863-81	s	RES, CHIP 100 (1005)
R136	1-208-863-81	s	RES, CHIP 100 (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-911-81	s	RES, CHIP 10K (1005)
R139	1-208-911-81	s	RES, CHIP 10K (1005)
R140	1-208-911-81	s	RES, CHIP 10K (1005)
R141	1-208-887-81	s	RES, CHIP 1.0K (1005)
R142	1-208-887-81	s	RES, CHIP 1.0K (1005)
R143	1-208-887-81	s	RES, CHIP 1.0K (1005)
R144	1-208-887-81	s	RES, CHIP 1.0K (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R146	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-208-887-81	s	RES, CHIP 1.0K (1005)
R149	1-208-855-81	s	RES, CHIP 47 (1005)
R150	1-208-855-81	s	RES, CHIP 47 (1005)
R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-208-855-81	s	RES, CHIP 47 (1005)
R153	1-208-855-81	s	RES, CHIP 47 (1005)
R154	1-208-855-81	s	RES, CHIP 47 (1005)
R155	1-208-855-81	s	RES, CHIP 47 (1005)
R156	1-208-855-81	s	RES, CHIP 47 (1005)
R157	1-208-855-81	s	RES, CHIP 47 (1005)
R158	1-208-855-81	s	RES, CHIP 47 (1005)
R159	1-208-855-81	s	RES, CHIP 47 (1005)
R160	1-208-855-81	s	RES, CHIP 47 (1005)
R161	1-208-855-81	s	RES, CHIP 47 (1005)
R162	1-208-855-81	s	RES, CHIP 47 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-855-81	s	RES, CHIP 47 (1005)
R165	1-220-878-81	s	RES, CHIP 22 (1005)
R166	1-220-878-81	s	RES, CHIP 22 (1005)
R167	1-220-878-81	s	RES, CHIP 22 (1005)
R168	1-220-878-81	s	RES, CHIP 22 (1005)
R169	1-220-878-81	s	RES, CHIP 22 (1005)
R170	1-220-878-81	s	RES, CHIP 22 (1005)
R171	1-220-878-81	s	RES, CHIP 22 (1005)
R172	1-220-878-81	s	RES, CHIP 22 (1005)
R173	1-220-878-81	s	RES, CHIP 22 (1005)
R174	1-220-878-81	s	RES, CHIP 22 (1005)
R175	1-220-878-81	s	RES, CHIP 22 (1005)
R176	1-220-878-81	s	RES, CHIP 22 (1005)
R177	1-220-878-81	s	RES, CHIP 22 (1005)
R178	1-220-878-81	s	RES, CHIP 22 (1005)
R179	1-220-878-81	s	RES, CHIP 22 (1005)
R180	1-220-878-81	s	RES, CHIP 22 (1005)
R181	1-208-875-81	s	RES, CHIP 330 (1005)
R182	1-208-875-81	s	RES, CHIP 330 (1005)
R183	1-208-875-81	s	RES, CHIP 330 (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R184	1-208-875-81	s	RES, CHIP 330 (1005)
R185	1-208-875-81	s	RES, CHIP 330 (1005)
R186	1-208-875-81	s	RES, CHIP 330 (1005)
R187	1-208-875-81	s	RES, CHIP 330 (1005)
R188	1-208-875-81	s	RES, CHIP 330 (1005)
R189	1-208-875-81	s	RES, CHIP 330 (1005)
R190	1-208-875-81	s	RES, CHIP 330 (1005)
R191	1-208-875-81	s	RES, CHIP 330 (1005)
R192	1-208-875-81	s	RES, CHIP 330 (1005)
R193	1-208-875-81	s	RES, CHIP 330 (1005)
R194	1-208-875-81	s	RES, CHIP 330 (1005)
R195	1-208-875-81	s	RES, CHIP 330 (1005)
R196	1-208-875-81	s	RES, CHIP 330 (1005)
R197	1-208-860-81	s	RES, CHIP 75 (1005)
R198	1-208-860-81	s	RES, CHIP 75 (1005)
R199	1-208-860-81	s	RES, CHIP 75 (1005)
R200	1-208-860-81	s	RES, CHIP 75 (1005)
R201	1-208-860-81	s	RES, CHIP 75 (1005)
R202	1-208-860-81	s	RES, CHIP 75 (1005)
R203	1-208-860-81	s	RES, CHIP 75 (1005)
R204	1-208-860-81	s	RES, CHIP 75 (1005)
R205	1-220-884-81	s	RES, CHIP 39 (1005)
R206	1-220-884-81	s	RES, CHIP 39 (1005)
R207	1-220-884-81	s	RES, CHIP 39 (1005)
R208	1-220-884-81	s	RES, CHIP 39 (1005)
R213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R215	1-208-887-81	s	RES, CHIP 1.0K (1005)
R216	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221	1-208-887-81	s	RES, CHIP 1.0K (1005)
R222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R223	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R224	1-208-887-81	s	RES, CHIP 1.0K (1005)
R225	1-208-887-81	s	RES, CHIP 1.0K (1005)
R226	1-208-887-81	s	RES, CHIP 1.0K (1005)
R227	1-208-887-81	s	RES, CHIP 1.0K (1005)
R228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R229	1-208-863-81	s	RES, CHIP 100 (1005)
R230	1-208-863-81	s	RES, CHIP 100 (1005)
R231	1-208-863-81	s	RES, CHIP 100 (1005)
R232	1-208-863-81	s	RES, CHIP 100 (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)
R237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R238	1-208-887-81	s	RES, CHIP 1.0K (1005)
R239	1-208-887-81	s	RES, CHIP 1.0K (1005)
R240	1-208-887-81	s	RES, CHIP 1.0K (1005)
R241	1-208-887-81	s	RES, CHIP 1.0K (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R243	1-208-887-81	s	RES, CHIP 1.0K (1005)
R244	1-208-887-81	s	RES, CHIP 1.0K (1005)
R245	1-208-855-81	s	RES, CHIP 47 (1005)
R246	1-208-855-81	s	RES, CHIP 47 (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R247	1-208-855-81	s	RES, CHIP 47 (1005)
R248	1-208-855-81	s	RES, CHIP 47 (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R250	1-208-855-81	s	RES, CHIP 47 (1005)
R251	1-208-855-81	s	RES, CHIP 47 (1005)
R252	1-208-855-81	s	RES, CHIP 47 (1005)
R253	1-208-855-81	s	RES, CHIP 47 (1005)
R254	1-208-855-81	s	RES, CHIP 47 (1005)
R255	1-208-855-81	s	RES, CHIP 47 (1005)
R256	1-208-855-81	s	RES, CHIP 47 (1005)
R257	1-208-855-81	s	RES, CHIP 47 (1005)
R258	1-208-855-81	s	RES, CHIP 47 (1005)
R259	1-208-855-81	s	RES, CHIP 47 (1005)
R260	1-208-855-81	s	RES, CHIP 47 (1005)
R261	1-220-878-81	s	RES, CHIP 22 (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R263	1-220-878-81	s	RES, CHIP 22 (1005)
R264	1-220-878-81	s	RES, CHIP 22 (1005)
R265	1-220-878-81	s	RES, CHIP 22 (1005)
R266	1-220-878-81	s	RES, CHIP 22 (1005)
R267	1-220-878-81	s	RES, CHIP 22 (1005)
R268	1-220-878-81	s	RES, CHIP 22 (1005)
R269	1-220-878-81	s	RES, CHIP 22 (1005)
R270	1-220-878-81	s	RES, CHIP 22 (1005)
R271	1-220-878-81	s	RES, CHIP 22 (1005)
R272	1-220-878-81	s	RES, CHIP 22 (1005)
R273	1-220-878-81	s	RES, CHIP 22 (1005)
R274	1-220-878-81	s	RES, CHIP 22 (1005)
R275	1-220-878-81	s	RES, CHIP 22 (1005)
R276	1-220-878-81	s	RES, CHIP 22 (1005)
R277	1-208-875-81	s	RES, CHIP 330 (1005)
R278	1-208-875-81	s	RES, CHIP 330 (1005)
R279	1-208-875-81	s	RES, CHIP 330 (1005)
R280	1-208-875-81	s	RES, CHIP 330 (1005)
R281	1-208-875-81	s	RES, CHIP 330 (1005)
R282	1-208-875-81	s	RES, CHIP 330 (1005)
R283	1-208-875-81	s	RES, CHIP 330 (1005)
R284	1-208-875-81	s	RES, CHIP 330 (1005)
R285	1-208-875-81	s	RES, CHIP 330 (1005)
R286	1-208-875-81	s	RES, CHIP 330 (1005)
R287	1-208-875-81	s	RES, CHIP 330 (1005)
R288	1-208-875-81	s	RES, CHIP 330 (1005)
R289	1-208-875-81	s	RES, CHIP 330 (1005)
R290	1-208-875-81	s	RES, CHIP 330 (1005)
R291	1-208-875-81	s	RES, CHIP 330 (1005)
R292	1-208-875-81	s	RES, CHIP 330 (1005)
R301	1-208-860-81	s	RES, CHIP 75 (1005)
R302	1-208-860-81	s	RES, CHIP 75 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-860-81	s	RES, CHIP 75 (1005)
R306	1-208-860-81	s	RES, CHIP 75 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-860-81	s	RES, CHIP 75 (1005)
R309	1-220-884-81	s	RES, CHIP 39 (1005)
R310	1-220-884-81	s	RES, CHIP 39 (1005)
R311	1-220-884-81	s	RES, CHIP 39 (1005)
R312	1-220-884-81	s	RES, CHIP 39 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R319	1-208-887-81	s	RES, CHIP 1.0K (1005)
R320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R322	1-208-887-81	s	RES, CHIP 1.0K (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R325	1-208-887-81	s	RES, CHIP 1.0K (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-208-887-81	s	RES, CHIP 1.0K (1005)
R329	1-208-887-81	s	RES, CHIP 1.0K (1005)
R330	1-208-887-81	s	RES, CHIP 1.0K (1005)
R331	1-208-887-81	s	RES, CHIP 1.0K (1005)
R332	1-208-887-81	s	RES, CHIP 1.0K (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-208-855-81	s	RES, CHIP 47 (1005)
R335	1-208-855-81	s	RES, CHIP 47 (1005)
R336	1-208-855-81	s	RES, CHIP 47 (1005)
R337	1-208-855-81	s	RES, CHIP 47 (1005)
R338	1-208-855-81	s	RES, CHIP 47 (1005)
R339	1-208-855-81	s	RES, CHIP 47 (1005)
R340	1-208-855-81	s	RES, CHIP 47 (1005)
R341	1-220-878-81	s	RES, CHIP 22 (1005)
R342	1-220-878-81	s	RES, CHIP 22 (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R344	1-220-878-81	s	RES, CHIP 22 (1005)
R345	1-220-878-81	s	RES, CHIP 22 (1005)
R346	1-220-878-81	s	RES, CHIP 22 (1005)
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R349	1-208-875-81	s	RES, CHIP 330 (1005)
R350	1-208-875-81	s	RES, CHIP 330 (1005)
R351	1-208-875-81	s	RES, CHIP 330 (1005)
R352	1-208-875-81	s	RES, CHIP 330 (1005)
R353	1-208-875-81	s	RES, CHIP 330 (1005)
R354	1-208-875-81	s	RES, CHIP 330 (1005)
R355	1-208-875-81	s	RES, CHIP 330 (1005)
R356	1-208-875-81	s	RES, CHIP 330 (1005)
R357	1-208-860-81	s	RES, CHIP 75 (1005)
R358	1-208-860-81	s	RES, CHIP 75 (1005)
R359	1-208-860-81	s	RES, CHIP 75 (1005)
R360	1-208-860-81	s	RES, CHIP 75 (1005)
R361	1-208-860-81	s	RES, CHIP 75 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-220-884-81	s	RES, CHIP 39 (1005)
R364	1-220-884-81	s	RES, CHIP 39 (1005)
R365	1-220-884-81	s	RES, CHIP 39 (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R370	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R371	1-208-887-81	s	RES, CHIP 1.0K (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R374	1-208-887-81	s	RES, CHIP 1.0K (1005)
R375	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R376	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R377	1-208-887-81	s	RES, CHIP 1.0K (1005)
R378	1-208-887-81	s	RES, CHIP 1.0K (1005)
R379	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNI-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R380	1-208-887-81	s	RES, CHIP 1.0K (1005)
R381	1-208-855-81	s	RES, CHIP 47 (1005)
R382	1-208-855-81	s	RES, CHIP 47 (1005)
R383	1-208-855-81	s	RES, CHIP 47 (1005)
R385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R386	1-208-855-81	s	RES, CHIP 47 (1005)
R387	1-208-855-81	s	RES, CHIP 47 (1005)
R388	1-208-855-81	s	RES, CHIP 47 (1005)
R389	1-220-878-81	s	RES, CHIP 22 (1005)
R390	1-220-878-81	s	RES, CHIP 22 (1005)
R391	1-220-878-81	s	RES, CHIP 22 (1005)
R392	1-220-878-81	s	RES, CHIP 22 (1005)
R393	1-220-878-81	s	RES, CHIP 22 (1005)
R394	1-220-878-81	s	RES, CHIP 22 (1005)
R395	1-208-875-81	s	RES, CHIP 330 (1005)
R396	1-208-875-81	s	RES, CHIP 330 (1005)
R397	1-208-875-81	s	RES, CHIP 330 (1005)
R398	1-208-875-81	s	RES, CHIP 330 (1005)
R399	1-208-875-81	s	RES, CHIP 330 (1005)
R400	1-208-875-81	s	RES, CHIP 330 (1005)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP3	1-535-877-22	s	CHIP, CHECKER

CNO-24 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
16pcs	2-655-586-01	s	SCREW +B M2.6 EG
2pcs	3-637-896-04	s	SCREW,STEP(+B3X14)
16pcs	3-637-901-02	s	SCREW M2.6X5
C101	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C102	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C103	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C104	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C105	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C106	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C107	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C108	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C109	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C110	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C111	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C112	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C113	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C114	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C115	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C116	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C117	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C118	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C201	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C202	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C203	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C204	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C205	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C206	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C207	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C208	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C209	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C210	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C211	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C212	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C213	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C214	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C215	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C217	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C301	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C302	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C303	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C304	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C305	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C306	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C307	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C308	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C309	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C310	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C311	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C312	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C313	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C314	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C315	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C316	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C317	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C318	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C401	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C402	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C403	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C404	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C405	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C406	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C407	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C408	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C410	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C411	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C412	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C413	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C414	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C415	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C416	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C417	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C418	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C501	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C502	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C503	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C504	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C505	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C506	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C507	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C508	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C509	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C510	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C511	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C512	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C513	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C514	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C515	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C516	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C517	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C518	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C601	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C602	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C603	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C604	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C605	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C606	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C607	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C608	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C609	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C610	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C611	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C612	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C613	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C614	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C615	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C616	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C617	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C618	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C701	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C702	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C703	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C704	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C705	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C706	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C707	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C708	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C709	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C710	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C711	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C712	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C713	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C714	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C715	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C716	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C717	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C718	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C801	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C802	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C803	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C804	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C805	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C806	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C807	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C808	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C809	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C810	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C811	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C812	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C813	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C814	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C815	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C816	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C817	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C818	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C901	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C902	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C903	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C904	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C905	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C906	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1001	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1002	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1003	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1004	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1005	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1006	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1101	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1102	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1104	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1105	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1201	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1202	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1203	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1204	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1205	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1206	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1301	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1302	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1303	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1304	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1305	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1306	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1401	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1403	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1404	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1405	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1406	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1501	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1502	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1503	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1504	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1505	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1506	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1601	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1602	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1603	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1604	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1605	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C1606	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1701	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1702	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C1703	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1704	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C1705	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C1706	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1707	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1708	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1709	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1710	1-164-390-91	s	CAP, CERAMIC 330PF CH 1608
C1711	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1712	1-125-827-91	s	CAP, CHIP CERAMIC 1MF B
C1713	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C1714	1-131-862-91	s	CAP, CHIP TANTALUM ELECT 47MF
C1715	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1716	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C1717	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
CN901	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN902	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1001	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1002	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1101	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1102	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1201	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1202	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1301	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1302	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1401	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1402	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1501	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1502	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1601	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN1602	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
D1701	8-719-938-77	s	DIODE SB05-05C-TB-E
D1702	8-719-938-77	s	DIODE SB05-05C-TB-E
D1703	8-719-800-77	s	DIODE 1SS226-TE85L
E401	1-535-877-22	s	CHIP, CHECKER
E402	1-535-877-22	s	CHIP, CHECKER

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E403	1-535-877-22	s	CHIP, CHECKER
E404	1-535-877-22	s	CHIP, CHECKER
F1701	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
IC101	6-702-622-01	s	IC GS1535-CFUE3
IC201	6-702-622-01	s	IC GS1535-CFUE3
IC301	6-702-622-01	s	IC GS1535-CFUE3
IC401	6-702-622-01	s	IC GS1535-CFUE3
IC501	6-702-622-01	s	IC GS1535-CFUE3
IC601	6-702-622-01	s	IC GS1535-CFUE3
IC701	6-702-622-01	s	IC GS1535-CFUE3
IC801	6-702-622-01	s	IC GS1535-CFUE3
IC901	6-702-621-01	s	IC GS1528-CKAE3
IC1001	6-702-621-01	s	IC GS1528-CKAE3
IC1101	6-702-621-01	s	IC GS1528-CKAE3
IC1201	6-702-621-01	s	IC GS1528-CKAE3
IC1301	6-702-621-01	s	IC GS1528-CKAE3
IC1401	6-702-621-01	s	IC GS1528-CKAE3
IC1501	6-702-621-01	s	IC GS1528-CKAE3
IC1601	6-702-621-01	s	IC GS1528-CKAE3
IC1701	8-759-669-64	s	IC TL1451ACPWR-12
L901	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L902	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1001	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1002	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1101	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1102	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1201	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1202	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1301	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1302	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1401	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1402	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1501	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1502	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1601	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1602	1-414-459-21	s	INDUCTOR, CHIP (S) 4.7NH
L1701	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L1702	1-419-823-21	s	COIL, CHOKE 33UH
L1703	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
Q1701	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
Q1702	6-551-662-01	s	TRANSISTOR SI4431BDY-T1-E3
Q1703	8-729-120-12	s	TRANSISTOR 2SC1623-T1-L5L6
Q1704	8-729-142-13	s	TRANSISTOR 2SA1462-T1Y33Y34
Q1705	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
R101	1-211-987-91	s	RES, CHIP 56 (1608)
R102	1-211-987-91	s	RES, CHIP 56 (1608)
R103	1-216-839-91	s	RES, CHIP 33K (1608)
R104	1-218-855-91	s	RES, CHIP 2.2K (1608)
R105	1-218-855-91	s	RES, CHIP 2.2K (1608)
R106	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R108	1-211-969-91	s	RES, CHIP 10 (1608)
R109	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R110	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R111	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R112	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R113	1-211-987-91	s	RES, CHIP 56 (1608)
R116	1-211-969-91	s	RES, CHIP 10 (1608)

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R117	1-211-969-91	s	RES, CHIP 10 (1608)
R118	1-218-823-91	s	RES, CHIP 100 (1608)
R201	1-211-987-91	s	RES, CHIP 56 (1608)
R202	1-211-987-91	s	RES, CHIP 56 (1608)
R203	1-216-839-91	s	RES, CHIP 33K (1608)
R204	1-218-855-91	s	RES, CHIP 2.2K (1608)
R205	1-218-855-91	s	RES, CHIP 2.2K (1608)
R206	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R208	1-211-969-91	s	RES, CHIP 10 (1608)
R209	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R210	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R211	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R212	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R213	1-211-987-91	s	RES, CHIP 56 (1608)
R216	1-211-969-91	s	RES, CHIP 10 (1608)
R217	1-211-969-91	s	RES, CHIP 10 (1608)
R218	1-218-823-91	s	RES, CHIP 100 (1608)
R301	1-211-987-91	s	RES, CHIP 56 (1608)
R302	1-211-987-91	s	RES, CHIP 56 (1608)
R303	1-216-839-91	s	RES, CHIP 33K (1608)
R304	1-218-855-91	s	RES, CHIP 2.2K (1608)
R305	1-218-855-91	s	RES, CHIP 2.2K (1608)
R306	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R308	1-211-969-91	s	RES, CHIP 10 (1608)
R309	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R310	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R311	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R312	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R313	1-211-987-91	s	RES, CHIP 56 (1608)
R316	1-211-969-91	s	RES, CHIP 10 (1608)
R317	1-211-969-91	s	RES, CHIP 10 (1608)
R318	1-218-823-91	s	RES, CHIP 100 (1608)
R401	1-211-987-91	s	RES, CHIP 56 (1608)
R402	1-211-987-91	s	RES, CHIP 56 (1608)
R403	1-216-839-91	s	RES, CHIP 33K (1608)
R404	1-218-855-91	s	RES, CHIP 2.2K (1608)
R405	1-218-855-91	s	RES, CHIP 2.2K (1608)
R406	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R408	1-211-969-91	s	RES, CHIP 10 (1608)
R409	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R410	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R411	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R412	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R413	1-211-987-91	s	RES, CHIP 56 (1608)
R416	1-211-969-91	s	RES, CHIP 10 (1608)
R417	1-211-969-91	s	RES, CHIP 10 (1608)
R418	1-218-823-91	s	RES, CHIP 100 (1608)
R501	1-211-987-91	s	RES, CHIP 56 (1608)
R502	1-211-987-91	s	RES, CHIP 56 (1608)
R503	1-216-839-91	s	RES, CHIP 33K (1608)
R504	1-218-855-91	s	RES, CHIP 2.2K (1608)
R505	1-218-855-91	s	RES, CHIP 2.2K (1608)
R506	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R508	1-211-969-91	s	RES, CHIP 10 (1608)
R509	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R510	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R511	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R512	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R513	1-211-987-91	s	RES, CHIP 56 (1608)

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R516	1-211-969-91	s	RES, CHIP 10 (1608)
R517	1-211-969-91	s	RES, CHIP 10 (1608)
R518	1-218-823-91	s	RES, CHIP 100 (1608)
R601	1-211-987-91	s	RES, CHIP 56 (1608)
R602	1-211-987-91	s	RES, CHIP 56 (1608)
R603	1-216-839-91	s	RES, CHIP 33K (1608)
R604	1-218-855-91	s	RES, CHIP 2.2K (1608)
R605	1-218-855-91	s	RES, CHIP 2.2K (1608)
R606	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R608	1-211-969-91	s	RES, CHIP 10 (1608)
R609	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R610	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R611	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R612	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R613	1-211-987-91	s	RES, CHIP 56 (1608)
R616	1-211-969-91	s	RES, CHIP 10 (1608)
R617	1-211-969-91	s	RES, CHIP 10 (1608)
R618	1-218-823-91	s	RES, CHIP 100 (1608)
R701	1-211-987-91	s	RES, CHIP 56 (1608)
R702	1-211-987-91	s	RES, CHIP 56 (1608)
R703	1-216-839-91	s	RES, CHIP 33K (1608)
R704	1-218-855-91	s	RES, CHIP 2.2K (1608)
R705	1-218-855-91	s	RES, CHIP 2.2K (1608)
R706	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R708	1-211-969-91	s	RES, CHIP 10 (1608)
R709	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R710	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R711	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R712	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R713	1-211-987-91	s	RES, CHIP 56 (1608)
R716	1-211-969-91	s	RES, CHIP 10 (1608)
R717	1-211-969-91	s	RES, CHIP 10 (1608)
R718	1-218-823-91	s	RES, CHIP 100 (1608)
R801	1-211-987-91	s	RES, CHIP 56 (1608)
R802	1-211-987-91	s	RES, CHIP 56 (1608)
R803	1-216-839-91	s	RES, CHIP 33K (1608)
R804	1-218-855-91	s	RES, CHIP 2.2K (1608)
R805	1-218-855-91	s	RES, CHIP 2.2K (1608)
R806	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R808	1-211-969-91	s	RES, CHIP 10 (1608)
R809	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R810	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R811	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R812	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R813	1-211-987-91	s	RES, CHIP 56 (1608)
R816	1-211-969-91	s	RES, CHIP 10 (1608)
R817	1-211-969-91	s	RES, CHIP 10 (1608)
R818	1-218-823-91	s	RES, CHIP 100 (1608)
R901	1-211-987-91	s	RES, CHIP 56 (1608)
R902	1-211-987-91	s	RES, CHIP 56 (1608)
R903	1-218-844-91	s	RES, CHIP 750 (1608)
R904	1-211-990-91	s	RES, CHIP 75 (1608)
R905	1-211-990-91	s	RES, CHIP 75 (1608)
R906	1-218-823-91	s	RES, CHIP 100 (1608)
R907	1-218-823-91	s	RES, CHIP 100 (1608)
R908	1-218-871-91	s	RES, CHIP 10K (1608)
R909	1-218-871-91	s	RES, CHIP 10K (1608)
R1001	1-211-987-91	s	RES, CHIP 56 (1608)
R1002	1-211-987-91	s	RES, CHIP 56 (1608)

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1003	1-218-844-91	s	RES, CHIP 750 (1608)
R1004	1-211-990-91	s	RES, CHIP 75 (1608)
R1005	1-211-990-91	s	RES, CHIP 75 (1608)
R1006	1-218-823-91	s	RES, CHIP 100 (1608)
R1007	1-218-823-91	s	RES, CHIP 100 (1608)
R1008	1-218-871-91	s	RES, CHIP 10K (1608)
R1009	1-218-871-91	s	RES, CHIP 10K (1608)
R1101	1-211-987-91	s	RES, CHIP 56 (1608)
R1102	1-211-987-91	s	RES, CHIP 56 (1608)
R1103	1-218-844-91	s	RES, CHIP 750 (1608)
R1104	1-211-990-91	s	RES, CHIP 75 (1608)
R1105	1-211-990-91	s	RES, CHIP 75 (1608)
R1106	1-218-823-91	s	RES, CHIP 100 (1608)
R1107	1-218-823-91	s	RES, CHIP 100 (1608)
R1108	1-218-871-91	s	RES, CHIP 10K (1608)
R1109	1-218-871-91	s	RES, CHIP 10K (1608)
R1201	1-211-987-91	s	RES, CHIP 56 (1608)
R1202	1-211-987-91	s	RES, CHIP 56 (1608)
R1203	1-218-844-91	s	RES, CHIP 750 (1608)
R1204	1-211-990-91	s	RES, CHIP 75 (1608)
R1205	1-211-990-91	s	RES, CHIP 75 (1608)
R1206	1-218-823-91	s	RES, CHIP 100 (1608)
R1207	1-218-823-91	s	RES, CHIP 100 (1608)
R1208	1-218-871-91	s	RES, CHIP 10K (1608)
R1209	1-218-871-91	s	RES, CHIP 10K (1608)
R1301	1-211-987-91	s	RES, CHIP 56 (1608)
R1302	1-211-987-91	s	RES, CHIP 56 (1608)
R1303	1-218-844-91	s	RES, CHIP 750 (1608)
R1304	1-211-990-91	s	RES, CHIP 75 (1608)
R1305	1-211-990-91	s	RES, CHIP 75 (1608)
R1306	1-218-823-91	s	RES, CHIP 100 (1608)
R1307	1-218-823-91	s	RES, CHIP 100 (1608)
R1308	1-218-871-91	s	RES, CHIP 10K (1608)
R1309	1-218-871-91	s	RES, CHIP 10K (1608)
R1401	1-211-987-91	s	RES, CHIP 56 (1608)
R1402	1-211-987-91	s	RES, CHIP 56 (1608)
R1403	1-218-844-91	s	RES, CHIP 750 (1608)
R1404	1-211-990-91	s	RES, CHIP 75 (1608)
R1405	1-211-990-91	s	RES, CHIP 75 (1608)
R1406	1-218-823-91	s	RES, CHIP 100 (1608)
R1407	1-218-823-91	s	RES, CHIP 100 (1608)
R1408	1-218-871-91	s	RES, CHIP 10K (1608)
R1409	1-218-871-91	s	RES, CHIP 10K (1608)
R1501	1-211-987-91	s	RES, CHIP 56 (1608)
R1502	1-211-987-91	s	RES, CHIP 56 (1608)
R1503	1-218-844-91	s	RES, CHIP 750 (1608)
R1504	1-211-990-91	s	RES, CHIP 75 (1608)
R1505	1-211-990-91	s	RES, CHIP 75 (1608)
R1506	1-218-823-91	s	RES, CHIP 100 (1608)
R1507	1-218-823-91	s	RES, CHIP 100 (1608)
R1508	1-218-871-91	s	RES, CHIP 10K (1608)
R1509	1-218-871-91	s	RES, CHIP 10K (1608)
R1601	1-211-987-91	s	RES, CHIP 56 (1608)
R1602	1-211-987-91	s	RES, CHIP 56 (1608)
R1603	1-218-844-91	s	RES, CHIP 750 (1608)
R1604	1-211-990-91	s	RES, CHIP 75 (1608)
R1605	1-211-990-91	s	RES, CHIP 75 (1608)
R1606	1-218-823-91	s	RES, CHIP 100 (1608)
R1607	1-218-823-91	s	RES, CHIP 100 (1608)

(CNO-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1608	1-218-871-91	s	RES, CHIP 10K (1608)
R1609	1-218-871-91	s	RES, CHIP 10K (1608)
R1701	1-218-871-91	s	RES, CHIP 10K (1608)
R1702	1-218-871-91	s	RES, CHIP 10K (1608)
R1703	1-211-985-91	s	RES, CHIP 47 (1608)
R1704	1-218-823-91	s	RES, CHIP 100 (1608)
R1705	1-216-835-91	s	RES, CHIP 15K (1608)
R1706	1-218-871-91	s	RES, CHIP 10K (1608)
R1707	1-218-871-91	s	RES, CHIP 10K (1608)
R1708	1-218-865-91	s	RES, CHIP 5.6K (1608)
R1709	1-218-843-91	s	RES, CHIP 680 (1608)
R1710	1-216-807-91	s	RES, CHIP 68 (1608)
R1713	1-216-829-91	s	RES, CHIP 4.7K (1608)
R1714	1-216-849-91	s	RES, CHIP 220K (1608)
R1715	1-216-813-91	s	RES, CHIP 220 (1608)
R1716	1-216-837-91	s	RES, CHIP 22K (1608)
R1717	1-216-813-91	s	RES, CHIP 220 (1608)
R1719	1-216-839-91	s	RES, CHIP 33K (1608)
R1720	1-216-849-91	s	RES, CHIP 220K (1608)
R1721	1-216-849-91	s	RES, CHIP 220K (1608)
R1722	1-216-849-91	s	RES, CHIP 220K (1608)
R1723	1-216-841-91	s	RES, CHIP 47K (1608)
R1724	1-216-841-91	s	RES, CHIP 47K (1608)
R1725	1-216-841-91	s	RES, CHIP 47K (1608)
X101	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X201	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X301	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X401	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X501	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X601	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X701	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)
X801	1-795-710-21	s	VIBRATOR, CRYSTAL (SMD) (14.14 MHz)

CNO-35 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1738-460-A	s	MOUNTED CIRCUIT BOARD, CNO-35
8pcs	2-655-586-01	s	SCREW +B M2.6 EG
2pcs	3-637-896-04	s	SCREW,STEP(+B3X14)
8pcs	3-637-901-02	s	SCREW M2.6X5
C101	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C102	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C103	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C104	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C105	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C106	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C107	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C108	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C111	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C112	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C113	1-100-986-21	s	CAP, ELECT 330MF
C114	1-100-986-21	s	CAP, ELECT 330MF
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C207	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C212	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C213	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C214	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C219	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C225	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C226	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C232	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C233	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C238	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C239	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C240	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C245	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C246	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C247	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C252	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C254	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C261	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C266	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C267	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C275	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C280	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C281	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C282	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C287	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C288	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C289	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C293	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C294	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C295	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C296	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C308	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
CN201	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN202	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN203	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN204	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN205	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN206	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN207	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN208	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
D101	8-719-069-28	s	DIODE 1SS400TE-61
D102	8-719-072-43	s	DIODE RB050L-40TE25
D103	8-719-072-43	s	DIODE RB050L-40TE25
E101	1-535-877-22	s	CHIP, CHECKER
E102	1-535-877-22	s	CHIP, CHECKER
E103	1-535-877-22	s	CHIP, CHECKER
IC101	8-759-669-64	s	IC TL1451ACPWR-12
IC102	8-759-573-97	s	IC SN74LVC541APWR
IC201	6-709-619-01	s	IC GS1578ACNE3
IC202	6-709-619-01	s	IC GS1578ACNE3
IC203	6-709-619-01	s	IC GS1578ACNE3
IC204	6-709-619-01	s	IC GS1578ACNE3
IC205	6-709-619-01	s	IC GS1578ACNE3
IC206	6-709-619-01	s	IC GS1578ACNE3
IC207	6-709-619-01	s	IC GS1578ACNE3
IC208	6-709-619-01	s	IC GS1578ACNE3
IC209	6-709-619-01	s	IC GS1578ACNE3
IC210	6-709-619-01	s	IC GS1578ACNE3
IC211	6-709-619-01	s	IC GS1578ACNE3
IC212	6-709-619-01	s	IC GS1578ACNE3
IC213	6-709-619-01	s	IC GS1578ACNE3
IC214	6-709-619-01	s	IC GS1578ACNE3
IC215	6-709-619-01	s	IC GS1578ACNE3
IC216	6-709-619-01	s	IC GS1578ACNE3
L101	1-419-491-21	s	COIL, CHOKE 10UH
L102	1-400-175-21	s	COIL, CHOKE 47UH
L103	1-419-491-21	s	COIL, CHOKE 10UH
L201	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L202	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L203	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L204	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L205	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L206	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L207	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L208	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L213	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L214	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L215	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L216	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L217	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L218	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L219	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L220	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L221	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L222	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L223	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L224	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L225	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L226	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L227	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L228	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L229	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L230	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L231	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L232	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L233	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L234	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L235	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L236	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L237	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L238	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L239	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L240	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L241	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L242	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L243	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L244	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L245	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L246	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L247	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L248	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
PS101	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS102	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q101	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q102	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q103	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q104	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q105	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-943-81	s	RES, CHIP 220K (1005)
R103	1-208-943-81	s	RES, CHIP 220K (1005)
R104	1-208-927-81	s	RES, CHIP 47K (1005)
R105	1-208-943-81	s	RES, CHIP 220K (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-871-81	s	RES, CHIP 220 (1005)
R109	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-208-911-81	s	RES, CHIP 10K (1005)
R111	1-208-919-81	s	RES, CHIP 22K (1005)
R112	1-208-871-81	s	RES, CHIP 220 (1005)
R113	1-208-871-81	s	RES, CHIP 220 (1005)
R114	1-208-919-81	s	RES, CHIP 22K (1005)

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R115	1-208-943-81	s	RES, CHIP 220K (1005)
R116	1-208-927-81	s	RES, CHIP 47K (1005)
R117	1-208-935-81	s	RES, CHIP 100K (1005)
R118	1-208-927-81	s	RES, CHIP 47K (1005)
R119	1-208-863-81	s	RES, CHIP 100 (1005)
R120	1-208-871-81	s	RES, CHIP 220 (1005)
R121	1-208-919-81	s	RES, CHIP 22K (1005)
R122	1-208-927-81	s	RES, CHIP 47K (1005)
R123	1-208-911-81	s	RES, CHIP 10K (1005)
R124	1-208-911-81	s	RES, CHIP 10K (1005)
R125	1-208-855-81	s	RES, CHIP 47 (1005)
R126	1-208-863-81	s	RES, CHIP 100 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R128	1-208-903-81	s	RES, CHIP 4.7K (1005)
R129	1-208-911-81	s	RES, CHIP 10K (1005)
R130	1-208-911-81	s	RES, CHIP 10K (1005)
R131	1-208-911-81	s	RES, CHIP 10K (1005)
R132	1-208-863-81	s	RES, CHIP 100 (1005)
R133	1-208-863-81	s	RES, CHIP 100 (1005)
R134	1-208-863-81	s	RES, CHIP 100 (1005)
R201	1-220-874-81	s	RES, CHIP 15 (1005)
R202	1-220-874-81	s	RES, CHIP 15 (1005)
R203	1-220-874-81	s	RES, CHIP 15 (1005)
R204	1-220-874-81	s	RES, CHIP 15 (1005)
R206	1-220-878-81	s	RES, CHIP 22 (1005)
R207	1-208-884-81	s	RES, CHIP 750 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R209	1-208-855-81	s	RES, CHIP 47 (1005)
R210	1-208-863-81	s	RES, CHIP 100 (1005)
R211	1-208-860-81	s	RES, CHIP 75 (1005)
R212	1-208-860-81	s	RES, CHIP 75 (1005)
R213	1-208-867-81	s	RES, CHIP 150 (1005)
R214	1-208-867-81	s	RES, CHIP 150 (1005)
R215	1-208-860-81	s	RES, CHIP 75 (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-220-874-81	s	RES, CHIP 15 (1005)
R218	1-220-874-81	s	RES, CHIP 15 (1005)
R219	1-208-855-81	s	RES, CHIP 47 (1005)
R220	1-208-855-81	s	RES, CHIP 47 (1005)
R222	1-220-878-81	s	RES, CHIP 22 (1005)
R223	1-208-884-81	s	RES, CHIP 750 (1005)
R224	1-208-863-81	s	RES, CHIP 100 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-867-81	s	RES, CHIP 150 (1005)
R228	1-208-867-81	s	RES, CHIP 150 (1005)
R229	1-208-860-81	s	RES, CHIP 75 (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-220-874-81	s	RES, CHIP 15 (1005)
R232	1-220-874-81	s	RES, CHIP 15 (1005)
R233	1-220-874-81	s	RES, CHIP 15 (1005)
R234	1-220-874-81	s	RES, CHIP 15 (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R237	1-208-884-81	s	RES, CHIP 750 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R239	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-863-81	s	RES, CHIP 100 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R243	1-208-867-81	s	RES, CHIP 150 (1005)
R244	1-208-867-81	s	RES, CHIP 150 (1005)
R245	1-208-860-81	s	RES, CHIP 75 (1005)
R246	1-208-911-81	s	RES, CHIP 10K (1005)
R247	1-220-874-81	s	RES, CHIP 15 (1005)
R248	1-220-874-81	s	RES, CHIP 15 (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R250	1-208-855-81	s	RES, CHIP 47 (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-208-884-81	s	RES, CHIP 750 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-860-81	s	RES, CHIP 75 (1005)
R256	1-208-860-81	s	RES, CHIP 75 (1005)
R257	1-208-867-81	s	RES, CHIP 150 (1005)
R258	1-208-867-81	s	RES, CHIP 150 (1005)
R259	1-208-860-81	s	RES, CHIP 75 (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R263	1-208-884-81	s	RES, CHIP 750 (1005)
R264	1-208-855-81	s	RES, CHIP 47 (1005)
R265	1-208-855-81	s	RES, CHIP 47 (1005)
R266	1-208-863-81	s	RES, CHIP 100 (1005)
R267	1-208-860-81	s	RES, CHIP 75 (1005)
R268	1-208-860-81	s	RES, CHIP 75 (1005)
R269	1-208-867-81	s	RES, CHIP 150 (1005)
R270	1-208-867-81	s	RES, CHIP 150 (1005)
R271	1-208-860-81	s	RES, CHIP 75 (1005)
R272	1-208-911-81	s	RES, CHIP 10K (1005)
R273	1-208-855-81	s	RES, CHIP 47 (1005)
R274	1-208-855-81	s	RES, CHIP 47 (1005)
R276	1-220-878-81	s	RES, CHIP 22 (1005)
R277	1-208-884-81	s	RES, CHIP 750 (1005)
R278	1-208-863-81	s	RES, CHIP 100 (1005)
R279	1-208-860-81	s	RES, CHIP 75 (1005)
R280	1-208-860-81	s	RES, CHIP 75 (1005)
R281	1-208-867-81	s	RES, CHIP 150 (1005)
R282	1-208-867-81	s	RES, CHIP 150 (1005)
R283	1-208-860-81	s	RES, CHIP 75 (1005)
R284	1-208-911-81	s	RES, CHIP 10K (1005)
R286	1-220-878-81	s	RES, CHIP 22 (1005)
R287	1-208-884-81	s	RES, CHIP 750 (1005)
R288	1-208-860-81	s	RES, CHIP 75 (1005)
R289	1-208-860-81	s	RES, CHIP 75 (1005)
R290	1-208-855-81	s	RES, CHIP 47 (1005)
R291	1-208-855-81	s	RES, CHIP 47 (1005)
R292	1-208-863-81	s	RES, CHIP 100 (1005)
R293	1-208-867-81	s	RES, CHIP 150 (1005)
R294	1-208-867-81	s	RES, CHIP 150 (1005)
R295	1-208-860-81	s	RES, CHIP 75 (1005)
R296	1-208-911-81	s	RES, CHIP 10K (1005)
R297	1-208-855-81	s	RES, CHIP 47 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-220-878-81	s	RES, CHIP 22 (1005)
R301	1-208-884-81	s	RES, CHIP 750 (1005)
R302	1-208-863-81	s	RES, CHIP 100 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-867-81	s	RES, CHIP 150 (1005)
R306	1-208-867-81	s	RES, CHIP 150 (1005)

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-911-81	s	RES, CHIP 10K (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-208-884-81	s	RES, CHIP 750 (1005)
R312	1-208-860-81	s	RES, CHIP 75 (1005)
R313	1-208-860-81	s	RES, CHIP 75 (1005)
R314	1-208-855-81	s	RES, CHIP 47 (1005)
R315	1-208-855-81	s	RES, CHIP 47 (1005)
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-867-81	s	RES, CHIP 150 (1005)
R318	1-208-867-81	s	RES, CHIP 150 (1005)
R319	1-208-860-81	s	RES, CHIP 75 (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-855-81	s	RES, CHIP 47 (1005)
R322	1-208-855-81	s	RES, CHIP 47 (1005)
R324	1-220-878-81	s	RES, CHIP 22 (1005)
R325	1-208-884-81	s	RES, CHIP 750 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-863-81	s	RES, CHIP 100 (1005)
R329	1-208-867-81	s	RES, CHIP 150 (1005)
R330	1-208-867-81	s	RES, CHIP 150 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-911-81	s	RES, CHIP 10K (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-208-884-81	s	RES, CHIP 750 (1005)
R336	1-208-860-81	s	RES, CHIP 75 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-855-81	s	RES, CHIP 47 (1005)
R339	1-208-855-81	s	RES, CHIP 47 (1005)
R340	1-208-863-81	s	RES, CHIP 100 (1005)
R341	1-208-867-81	s	RES, CHIP 150 (1005)
R342	1-208-867-81	s	RES, CHIP 150 (1005)
R343	1-208-860-81	s	RES, CHIP 75 (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-855-81	s	RES, CHIP 47 (1005)
R346	1-208-855-81	s	RES, CHIP 47 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R349	1-208-884-81	s	RES, CHIP 750 (1005)
R350	1-208-860-81	s	RES, CHIP 75 (1005)
R351	1-208-860-81	s	RES, CHIP 75 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-867-81	s	RES, CHIP 150 (1005)
R354	1-208-867-81	s	RES, CHIP 150 (1005)
R355	1-208-860-81	s	RES, CHIP 75 (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R358	1-208-855-81	s	RES, CHIP 47 (1005)
R359	1-208-855-81	s	RES, CHIP 47 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R361	1-208-884-81	s	RES, CHIP 750 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-860-81	s	RES, CHIP 75 (1005)
R364	1-208-863-81	s	RES, CHIP 100 (1005)
R365	1-208-867-81	s	RES, CHIP 150 (1005)
R366	1-208-867-81	s	RES, CHIP 150 (1005)
R367	1-208-860-81	s	RES, CHIP 75 (1005)
R368	1-208-911-81	s	RES, CHIP 10K (1005)
R369	1-208-855-81	s	RES, CHIP 47 (1005)
R370	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R372	1-220-878-81	s	RES, CHIP 22 (1005)
R373	1-208-884-81	s	RES, CHIP 750 (1005)
R374	1-208-863-81	s	RES, CHIP 100 (1005)
R375	1-208-860-81	s	RES, CHIP 75 (1005)
R376	1-208-860-81	s	RES, CHIP 75 (1005)
R377	1-208-867-81	s	RES, CHIP 150 (1005)
R378	1-208-867-81	s	RES, CHIP 150 (1005)
R379	1-208-860-81	s	RES, CHIP 75 (1005)
R380	1-208-911-81	s	RES, CHIP 10K (1005)
R382	1-208-855-81	s	RES, CHIP 47 (1005)
R383	1-208-855-81	s	RES, CHIP 47 (1005)
R384	1-220-878-81	s	RES, CHIP 22 (1005)
R385	1-208-884-81	s	RES, CHIP 750 (1005)
R386	1-208-860-81	s	RES, CHIP 75 (1005)
R387	1-208-860-81	s	RES, CHIP 75 (1005)
R388	1-208-863-81	s	RES, CHIP 100 (1005)
R389	1-208-867-81	s	RES, CHIP 150 (1005)
R390	1-208-867-81	s	RES, CHIP 150 (1005)
R391	1-208-860-81	s	RES, CHIP 75 (1005)
R392	1-208-911-81	s	RES, CHIP 10K (1005)
R393	1-208-855-81	s	RES, CHIP 47 (1005)
R394	1-208-855-81	s	RES, CHIP 47 (1005)
R396	1-220-878-81	s	RES, CHIP 22 (1005)
R397	1-208-884-81	s	RES, CHIP 750 (1005)
R398	1-208-860-81	s	RES, CHIP 75 (1005)
R399	1-208-860-81	s	RES, CHIP 75 (1005)
R400	1-208-863-81	s	RES, CHIP 100 (1005)
R401	1-208-867-81	s	RES, CHIP 150 (1005)
R402	1-208-867-81	s	RES, CHIP 150 (1005)
R403	1-208-860-81	s	RES, CHIP 75 (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)

CNO-36 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1738-461-A	s	MOUNTED CIRCUIT BOARD, CNO-36
8pcs	2-655-586-01	s	SCREW +B M2.6 EG
8pcs	3-637-901-02	s	SCREW M2.6X5
C101	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C102	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C103	1-164-934-81	s	CAP, CHIP CERAMIC 330PF B 1005
C104	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C105	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C106	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C107	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C108	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C111	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C112	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C113	1-100-986-21	s	CAP, ELECT 330MF
C114	1-100-986-21	s	CAP, ELECT 330MF
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C207	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C212	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C213	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C214	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C219	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C225	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C226	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C238	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C239	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C240	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C245	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C251	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C252	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C253	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C254	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C258	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C259	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C260	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C261	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C266	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C267	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C274	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C275	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C280	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C281	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C282	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C286	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C287	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C288	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C289	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C293	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C294	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C295	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C296	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C308	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
CN201	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN202	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN203	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN204	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN205	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN206	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN207	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN208	1-819-993-11	s	CONNECTOR, COAXIAL(BNC DOUBLE)
D101	8-719-069-28	s	DIODE 1SS400TE-61
D102	8-719-072-43	s	DIODE RB050L-40TE25
D103	8-719-072-43	s	DIODE RB050L-40TE25
E101	1-535-877-22	s	CHIP, CHECKER
E102	1-535-877-22	s	CHIP, CHECKER
E103	1-535-877-22	s	CHIP, CHECKER
IC101	8-759-669-64	s	IC TL1451ACPWR-12
IC102	8-759-573-97	s	IC SN74LVC541APWR
IC201	6-709-619-01	s	IC GS1578ACNE3
IC202	6-709-619-01	s	IC GS1578ACNE3
IC203	6-709-619-01	s	IC GS1578ACNE3
IC204	6-709-619-01	s	IC GS1578ACNE3
IC205	6-709-619-01	s	IC GS1578ACNE3
IC206	6-709-619-01	s	IC GS1578ACNE3
IC207	6-709-619-01	s	IC GS1578ACNE3
IC208	6-709-619-01	s	IC GS1578ACNE3
IC209	6-709-619-01	s	IC GS1578ACNE3
IC210	6-709-619-01	s	IC GS1578ACNE3
IC211	6-709-619-01	s	IC GS1578ACNE3
IC212	6-709-619-01	s	IC GS1578ACNE3
IC213	6-709-619-01	s	IC GS1578ACNE3
IC214	6-709-619-01	s	IC GS1578ACNE3
IC215	6-709-619-01	s	IC GS1578ACNE3
IC216	6-709-619-01	s	IC GS1578ACNE3
L101	1-419-491-21	s	COIL, CHOKE 10UH
L102	1-400-175-21	s	COIL, CHOKE 47UH
L103	1-419-491-21	s	COIL, CHOKE 10UH
L201	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L202	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L203	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L204	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L205	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L206	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L207	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L208	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L209	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L210	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L211	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L212	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L213	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L214	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L215	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L216	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L217	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L218	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L219	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L220	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L221	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L222	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L223	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L224	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L225	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L226	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L227	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L228	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L229	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L230	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L231	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L232	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L233	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L234	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L235	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L236	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L237	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L238	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L239	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L240	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L241	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L242	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L243	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L244	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L245	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L246	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L247	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L248	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
PS101	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
PS102	⚠ 1-576-677-21	s	RINK, IC (4A/72V)
Q101	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q102	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q103	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q104	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q105	6-550-657-01	s	TRANSISTOR NTD20N03L27-T4
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-943-81	s	RES, CHIP 220K (1005)
R103	1-208-943-81	s	RES, CHIP 220K (1005)
R104	1-208-927-81	s	RES, CHIP 47K (1005)
R105	1-208-943-81	s	RES, CHIP 220K (1005)
R106	1-208-927-81	s	RES, CHIP 47K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-871-81	s	RES, CHIP 220 (1005)
R109	1-208-927-81	s	RES, CHIP 47K (1005)
R110	1-208-911-81	s	RES, CHIP 10K (1005)
R111	1-208-919-81	s	RES, CHIP 22K (1005)
R112	1-208-871-81	s	RES, CHIP 220 (1005)
R113	1-208-871-81	s	RES, CHIP 220 (1005)
R114	1-208-919-81	s	RES, CHIP 22K (1005)
R115	1-208-943-81	s	RES, CHIP 220K (1005)
R116	1-208-927-81	s	RES, CHIP 47K (1005)
R117	1-208-935-81	s	RES, CHIP 100K (1005)
R118	1-208-927-81	s	RES, CHIP 47K (1005)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R119	1-208-863-81	s	RES, CHIP 100 (1005)
R120	1-208-871-81	s	RES, CHIP 220 (1005)
R121	1-208-919-81	s	RES, CHIP 22K (1005)
R122	1-208-927-81	s	RES, CHIP 47K (1005)
R123	1-208-911-81	s	RES, CHIP 10K (1005)
R124	1-208-911-81	s	RES, CHIP 10K (1005)
R125	1-208-855-81	s	RES, CHIP 47 (1005)
R126	1-208-863-81	s	RES, CHIP 100 (1005)
R127	1-208-911-81	s	RES, CHIP 10K (1005)
R128	1-208-903-81	s	RES, CHIP 4.7K (1005)
R129	1-208-911-81	s	RES, CHIP 10K (1005)
R132	1-208-863-81	s	RES, CHIP 100 (1005)
R201	1-220-874-81	s	RES, CHIP 15 (1005)
R202	1-220-874-81	s	RES, CHIP 15 (1005)
R203	1-220-874-81	s	RES, CHIP 15 (1005)
R204	1-220-874-81	s	RES, CHIP 15 (1005)
R206	1-220-878-81	s	RES, CHIP 22 (1005)
R207	1-208-884-81	s	RES, CHIP 750 (1005)
R208	1-208-855-81	s	RES, CHIP 47 (1005)
R209	1-208-855-81	s	RES, CHIP 47 (1005)
R210	1-208-863-81	s	RES, CHIP 100 (1005)
R211	1-208-860-81	s	RES, CHIP 75 (1005)
R212	1-208-860-81	s	RES, CHIP 75 (1005)
R213	1-208-867-81	s	RES, CHIP 150 (1005)
R214	1-208-867-81	s	RES, CHIP 150 (1005)
R215	1-208-860-81	s	RES, CHIP 75 (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-220-874-81	s	RES, CHIP 15 (1005)
R218	1-220-874-81	s	RES, CHIP 15 (1005)
R219	1-208-855-81	s	RES, CHIP 47 (1005)
R220	1-208-855-81	s	RES, CHIP 47 (1005)
R222	1-220-878-81	s	RES, CHIP 22 (1005)
R223	1-208-884-81	s	RES, CHIP 750 (1005)
R224	1-208-863-81	s	RES, CHIP 100 (1005)
R225	1-208-860-81	s	RES, CHIP 75 (1005)
R226	1-208-860-81	s	RES, CHIP 75 (1005)
R227	1-208-867-81	s	RES, CHIP 150 (1005)
R228	1-208-867-81	s	RES, CHIP 150 (1005)
R229	1-208-860-81	s	RES, CHIP 75 (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-220-874-81	s	RES, CHIP 15 (1005)
R232	1-220-874-81	s	RES, CHIP 15 (1005)
R233	1-220-874-81	s	RES, CHIP 15 (1005)
R234	1-220-874-81	s	RES, CHIP 15 (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R237	1-208-884-81	s	RES, CHIP 750 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R239	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-863-81	s	RES, CHIP 100 (1005)
R241	1-208-860-81	s	RES, CHIP 75 (1005)
R242	1-208-860-81	s	RES, CHIP 75 (1005)
R243	1-208-867-81	s	RES, CHIP 150 (1005)
R244	1-208-867-81	s	RES, CHIP 150 (1005)
R245	1-208-860-81	s	RES, CHIP 75 (1005)
R246	1-208-911-81	s	RES, CHIP 10K (1005)
R247	1-220-874-81	s	RES, CHIP 15 (1005)
R248	1-220-874-81	s	RES, CHIP 15 (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R250	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-208-884-81	s	RES, CHIP 750 (1005)
R254	1-208-863-81	s	RES, CHIP 100 (1005)
R255	1-208-860-81	s	RES, CHIP 75 (1005)
R256	1-208-860-81	s	RES, CHIP 75 (1005)
R257	1-208-867-81	s	RES, CHIP 150 (1005)
R258	1-208-867-81	s	RES, CHIP 150 (1005)
R259	1-208-860-81	s	RES, CHIP 75 (1005)
R260	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R263	1-208-884-81	s	RES, CHIP 750 (1005)
R264	1-208-855-81	s	RES, CHIP 47 (1005)
R265	1-208-855-81	s	RES, CHIP 47 (1005)
R266	1-208-863-81	s	RES, CHIP 100 (1005)
R267	1-208-860-81	s	RES, CHIP 75 (1005)
R268	1-208-860-81	s	RES, CHIP 75 (1005)
R269	1-208-867-81	s	RES, CHIP 150 (1005)
R270	1-208-867-81	s	RES, CHIP 150 (1005)
R271	1-208-860-81	s	RES, CHIP 75 (1005)
R272	1-208-911-81	s	RES, CHIP 10K (1005)
R273	1-208-855-81	s	RES, CHIP 47 (1005)
R274	1-208-855-81	s	RES, CHIP 47 (1005)
R276	1-220-878-81	s	RES, CHIP 22 (1005)
R277	1-208-884-81	s	RES, CHIP 750 (1005)
R278	1-208-863-81	s	RES, CHIP 100 (1005)
R279	1-208-860-81	s	RES, CHIP 75 (1005)
R280	1-208-860-81	s	RES, CHIP 75 (1005)
R281	1-208-867-81	s	RES, CHIP 150 (1005)
R282	1-208-867-81	s	RES, CHIP 150 (1005)
R283	1-208-860-81	s	RES, CHIP 75 (1005)
R284	1-208-911-81	s	RES, CHIP 10K (1005)
R286	1-220-878-81	s	RES, CHIP 22 (1005)
R287	1-208-884-81	s	RES, CHIP 750 (1005)
R288	1-208-860-81	s	RES, CHIP 75 (1005)
R289	1-208-860-81	s	RES, CHIP 75 (1005)
R290	1-208-855-81	s	RES, CHIP 47 (1005)
R291	1-208-855-81	s	RES, CHIP 47 (1005)
R292	1-208-863-81	s	RES, CHIP 100 (1005)
R293	1-208-867-81	s	RES, CHIP 150 (1005)
R294	1-208-867-81	s	RES, CHIP 150 (1005)
R295	1-208-860-81	s	RES, CHIP 75 (1005)
R296	1-208-911-81	s	RES, CHIP 10K (1005)
R297	1-208-855-81	s	RES, CHIP 47 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-220-878-81	s	RES, CHIP 22 (1005)
R301	1-208-884-81	s	RES, CHIP 750 (1005)
R302	1-208-863-81	s	RES, CHIP 100 (1005)
R303	1-208-860-81	s	RES, CHIP 75 (1005)
R304	1-208-860-81	s	RES, CHIP 75 (1005)
R305	1-208-867-81	s	RES, CHIP 150 (1005)
R306	1-208-867-81	s	RES, CHIP 150 (1005)
R307	1-208-860-81	s	RES, CHIP 75 (1005)
R308	1-208-911-81	s	RES, CHIP 10K (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-208-884-81	s	RES, CHIP 750 (1005)
R312	1-208-860-81	s	RES, CHIP 75 (1005)
R313	1-208-860-81	s	RES, CHIP 75 (1005)
R314	1-208-855-81	s	RES, CHIP 47 (1005)
R315	1-208-855-81	s	RES, CHIP 47 (1005)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R316	1-208-863-81	s	RES, CHIP 100 (1005)
R317	1-208-867-81	s	RES, CHIP 150 (1005)
R318	1-208-867-81	s	RES, CHIP 150 (1005)
R319	1-208-860-81	s	RES, CHIP 75 (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-855-81	s	RES, CHIP 47 (1005)
R322	1-208-855-81	s	RES, CHIP 47 (1005)
R324	1-220-878-81	s	RES, CHIP 22 (1005)
R325	1-208-884-81	s	RES, CHIP 750 (1005)
R326	1-208-860-81	s	RES, CHIP 75 (1005)
R327	1-208-860-81	s	RES, CHIP 75 (1005)
R328	1-208-863-81	s	RES, CHIP 100 (1005)
R329	1-208-867-81	s	RES, CHIP 150 (1005)
R330	1-208-867-81	s	RES, CHIP 150 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-911-81	s	RES, CHIP 10K (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-208-884-81	s	RES, CHIP 750 (1005)
R336	1-208-860-81	s	RES, CHIP 75 (1005)
R337	1-208-860-81	s	RES, CHIP 75 (1005)
R338	1-208-855-81	s	RES, CHIP 47 (1005)
R339	1-208-855-81	s	RES, CHIP 47 (1005)
R340	1-208-863-81	s	RES, CHIP 100 (1005)
R341	1-208-867-81	s	RES, CHIP 150 (1005)
R342	1-208-867-81	s	RES, CHIP 150 (1005)
R343	1-208-860-81	s	RES, CHIP 75 (1005)
R344	1-208-911-81	s	RES, CHIP 10K (1005)
R345	1-208-855-81	s	RES, CHIP 47 (1005)
R346	1-208-855-81	s	RES, CHIP 47 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R349	1-208-884-81	s	RES, CHIP 750 (1005)
R350	1-208-860-81	s	RES, CHIP 75 (1005)
R351	1-208-860-81	s	RES, CHIP 75 (1005)
R352	1-208-863-81	s	RES, CHIP 100 (1005)
R353	1-208-867-81	s	RES, CHIP 150 (1005)
R354	1-208-867-81	s	RES, CHIP 150 (1005)
R355	1-208-860-81	s	RES, CHIP 75 (1005)
R356	1-208-911-81	s	RES, CHIP 10K (1005)
R358	1-208-855-81	s	RES, CHIP 47 (1005)
R359	1-208-855-81	s	RES, CHIP 47 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R361	1-208-884-81	s	RES, CHIP 750 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-860-81	s	RES, CHIP 75 (1005)
R364	1-208-863-81	s	RES, CHIP 100 (1005)
R365	1-208-867-81	s	RES, CHIP 150 (1005)
R366	1-208-867-81	s	RES, CHIP 150 (1005)
R367	1-208-860-81	s	RES, CHIP 75 (1005)
R368	1-208-911-81	s	RES, CHIP 10K (1005)
R369	1-208-855-81	s	RES, CHIP 47 (1005)
R370	1-208-855-81	s	RES, CHIP 47 (1005)
R372	1-220-878-81	s	RES, CHIP 22 (1005)
R373	1-208-884-81	s	RES, CHIP 750 (1005)
R374	1-208-863-81	s	RES, CHIP 100 (1005)
R375	1-208-860-81	s	RES, CHIP 75 (1005)
R376	1-208-860-81	s	RES, CHIP 75 (1005)
R377	1-208-867-81	s	RES, CHIP 150 (1005)
R378	1-208-867-81	s	RES, CHIP 150 (1005)
R379	1-208-860-81	s	RES, CHIP 75 (1005)

(CNO-36 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R380	1-208-911-81	s	RES, CHIP 10K (1005)
R382	1-208-855-81	s	RES, CHIP 47 (1005)
R383	1-208-855-81	s	RES, CHIP 47 (1005)
R384	1-220-878-81	s	RES, CHIP 22 (1005)
R385	1-208-884-81	s	RES, CHIP 750 (1005)
R386	1-208-860-81	s	RES, CHIP 75 (1005)
R387	1-208-860-81	s	RES, CHIP 75 (1005)
R388	1-208-863-81	s	RES, CHIP 100 (1005)
R389	1-208-867-81	s	RES, CHIP 150 (1005)
R390	1-208-867-81	s	RES, CHIP 150 (1005)
R391	1-208-860-81	s	RES, CHIP 75 (1005)
R392	1-208-911-81	s	RES, CHIP 10K (1005)
R393	1-208-855-81	s	RES, CHIP 47 (1005)
R394	1-208-855-81	s	RES, CHIP 47 (1005)
R396	1-220-878-81	s	RES, CHIP 22 (1005)
R397	1-208-884-81	s	RES, CHIP 750 (1005)
R398	1-208-860-81	s	RES, CHIP 75 (1005)
R399	1-208-860-81	s	RES, CHIP 75 (1005)
R400	1-208-863-81	s	RES, CHIP 100 (1005)
R401	1-208-867-81	s	RES, CHIP 150 (1005)
R402	1-208-867-81	s	RES, CHIP 150 (1005)
R403	1-208-860-81	s	RES, CHIP 75 (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R421	1-220-874-81	s	RES, CHIP 15 (1005)
R422	1-220-874-81	s	RES, CHIP 15 (1005)
R423	1-220-874-81	s	RES, CHIP 15 (1005)
R424	1-220-874-81	s	RES, CHIP 15 (1005)
R425	1-220-874-81	s	RES, CHIP 15 (1005)
R426	1-220-874-81	s	RES, CHIP 15 (1005)
R427	1-220-874-81	s	RES, CHIP 15 (1005)
R428	1-220-874-81	s	RES, CHIP 15 (1005)
R429	1-220-874-81	s	RES, CHIP 15 (1005)
R430	1-220-874-81	s	RES, CHIP 15 (1005)
R431	1-220-874-81	s	RES, CHIP 15 (1005)
R432	1-220-874-81	s	RES, CHIP 15 (1005)

DIF-184 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1558-837-A	s	MOUNTED CIRCUIT BOARD, DIF-184
C1	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C2	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C4	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C6	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C7	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C8	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C9	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C10	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C11	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C12	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C13	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C14	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C15	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C16	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C17	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C18	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C19	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN1	1-774-206-21	o	CONNECTOR, BOARD TO BOARD 80P
CN2	1-815-893-11	s	CONNECTOR, CARD (CFA) 50P
CN3	1-815-893-11	s	CONNECTOR, CARD (CFA) 50P
D1	8-719-074-31	s	DIODE CL-196YG-CD-T
D2	8-719-074-31	s	DIODE CL-196YG-CD-T
D3	8-719-074-31	s	DIODE CL-196YG-CD-T
D4	8-719-074-31	s	DIODE CL-196YG-CD-T
D5	8-719-074-31	s	DIODE CL-196YG-CD-T
D6	8-719-074-31	s	DIODE CL-196YG-CD-T
D7	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
IC1	6-700-694-01	s	IC PCI1420PDV
R1	1-218-823-91	s	RES, CHIP 100 (1608)
R2	1-218-823-91	s	RES, CHIP 100 (1608)
R3	1-218-839-91	s	RES, CHIP 470 (1608)
R4	1-218-839-91	s	RES, CHIP 470 (1608)
R5	1-218-839-91	s	RES, CHIP 470 (1608)
R6	1-218-839-91	s	RES, CHIP 470 (1608)
R7	1-218-855-91	s	RES, CHIP 2.2K (1608)
R8	1-218-839-91	s	RES, CHIP 470 (1608)
R9	1-218-839-91	s	RES, CHIP 470 (1608)
R10	1-218-855-91	s	RES, CHIP 2.2K (1608)
R11	1-218-855-91	s	RES, CHIP 2.2K (1608)
R12	1-218-855-91	s	RES, CHIP 2.2K (1608)
R13	1-218-839-91	s	RES, CHIP 470 (1608)
R21	1-218-823-91	s	RES, CHIP 100 (1608)
R27	1-218-855-91	s	RES, CHIP 2.2K (1608)
R30	1-218-855-91	s	RES, CHIP 2.2K (1608)
R31	1-218-839-91	s	RES, CHIP 470 (1608)
R32	1-218-839-91	s	RES, CHIP 470 (1608)
RB1	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB2	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB3	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)

(DIF-184 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB4	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB5	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB6	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB7	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB8	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB9	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB10	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)

DVP-49 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1547-168-A	s	MOUNTED CIRCUIT BOARD, DVP-49
1pc	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
3pcs	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
3pcs	3-636-891-01	o	SPACER
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
6pcs	4-143-557-01	s	SPRING, COMPRESSION
6pcs	4-143-559-01	s	PIN, PUSH
2pcs	7-626-300-54	s	SPRING PIN 3X6
3pcs	7-682-946-01	s	SCREW +PSW 3X5
C1	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C101	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C102	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C103	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C104	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C105	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C106	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C107	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C108	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C109	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C110	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C111	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C112	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C113	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C114	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C115	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C116	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C117	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C118	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C119	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C120	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C121	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C122	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C123	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C124	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C125	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C126	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C127	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C128	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C129	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C130	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C131	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C132	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C133	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C134	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C135	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C136	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C137	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C138	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C139	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C140	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C146	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C148	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C149	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C201	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C202	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C203	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C318	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C336	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C339	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C341	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1634	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1646	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1647	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1655	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1718	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1720	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1818	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1833	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1928	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2119	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2141	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2214	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2219	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2241	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2246	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2314	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2319	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2341	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2346	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2349	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2353	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2419	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2441	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2446	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2514	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2519	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2541	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2544	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2546	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2549	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2604	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2608	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2619	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2718	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2720	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2801	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2802	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2803	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2804	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2858	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2859	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C2860	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2861	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2862	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2863	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2864	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2865	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2866	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2867	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2868	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2870	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2872	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2874	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2877	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2882	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2883	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2887	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2889	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2902	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2903	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2904	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2919	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2932	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2949	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2958	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2959	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C2960	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2961	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2962	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2963	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2964	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2965	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2966	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2967	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2968	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2969	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2970	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2972	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2973	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2974	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2975	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2977	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2981	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2983	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2985	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2987	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2991	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2994	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2995	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2996	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2997	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3001	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3002	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3003	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3004	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3027	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3047	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3057	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3058	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3059	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C3060	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3061	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3062	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3063	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3064	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3065	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3067	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3068	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3102	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3103	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3104	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3158	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3159	1-100-881-91	s	CAP, CERAMIC 47MF C (3216)
C3160	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3161	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3162	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3163	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3164	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3165	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3166	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3167	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3168	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3181	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3183	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3187	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3202	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3219	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3220	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3221	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3222	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3224	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3235	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3236	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
CN501	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN502	1-564-013-11	o	PIN, CONNECTOR 3P
CN1101	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-074-31	s	DIODE CL-196YG-CD-T
D101	8-719-069-28	s	DIODE 1SS400TE-61
D102	8-719-069-28	s	DIODE 1SS400TE-61
D201	8-719-074-31	s	DIODE CL-196YG-CD-T
D202	8-719-074-31	s	DIODE CL-196YG-CD-T
D203	8-719-074-31	s	DIODE CL-196YG-CD-T
D204	8-719-074-31	s	DIODE CL-196YG-CD-T
D205	8-719-074-31	s	DIODE CL-196YG-CD-T
D206	8-719-074-31	s	DIODE CL-196YG-CD-T
D401	8-719-074-31	s	DIODE CL-196YG-CD-T
D402	8-719-074-31	s	DIODE CL-196YG-CD-T
D601	8-719-074-31	s	DIODE CL-196YG-CD-T
D602	8-719-074-31	s	DIODE CL-196YG-CD-T
D603	8-719-074-31	s	DIODE CL-196YG-CD-T
D604	8-719-074-31	s	DIODE CL-196YG-CD-T
D701	8-719-074-31	s	DIODE CL-196YG-CD-T
D702	8-719-074-31	s	DIODE CL-196YG-CD-T
D703	8-719-074-31	s	DIODE CL-196YG-CD-T
D704	8-719-074-31	s	DIODE CL-196YG-CD-T
D705	8-719-074-31	s	DIODE CL-196YG-CD-T
D706	8-719-074-31	s	DIODE CL-196YG-CD-T
D707	8-719-074-31	s	DIODE CL-196YG-CD-T
D708	8-719-074-31	s	DIODE CL-196YG-CD-T
D709	8-719-074-31	s	DIODE CL-196YG-CD-T
D710	8-719-074-31	s	DIODE CL-196YG-CD-T
D711	8-719-074-31	s	DIODE CL-196YG-CD-T
D712	8-719-074-31	s	DIODE CL-196YG-CD-T
D713	8-719-074-31	s	DIODE CL-196YG-CD-T
D714	8-719-074-31	s	DIODE CL-196YG-CD-T
D715	8-719-074-31	s	DIODE CL-196YG-CD-T

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D716	8-719-074-31	s	DIODE CL-196YG-CD-T
D717	8-719-074-31	s	DIODE CL-196YG-CD-T
D718	8-719-074-31	s	DIODE CL-196YG-CD-T
D719	8-719-074-31	s	DIODE CL-196YG-CD-T
D720	8-719-074-31	s	DIODE CL-196YG-CD-T
DD101	1-487-092-11	s	DC-DC CONVERTER
DD102	1-487-092-11	s	DC-DC CONVERTER
DD103	1-487-092-11	s	DC-DC CONVERTER
DD104	1-487-092-11	s	DC-DC CONVERTER
DD105	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
E19	1-535-877-22	s	CHIP, CHECKER
E20	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F101	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F102	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F103	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F104	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F105	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB301	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1401	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1402	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1403	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1404	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1405	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1406	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1601	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1602	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1603	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1604	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1605	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1606	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1607	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1608	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1609	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1610	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB2801	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB2901	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB3001	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB3101	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
IC201	8-759-338-95	s	IC NJM2903V(TE2)
IC202	8-759-338-95	s	IC NJM2903V(TE2)
IC203	8-759-338-95	s	IC NJM2903V(TE2)
IC301	8-759-639-86	s	IC SN65LVDS32DR
IC302	8-759-639-86	s	IC SN65LVDS32DR
IC303	6-703-520-01	s	IC CY7B9930V-5AXC
IC304	6-707-855-01	s	IC TC74LCX574FT(EKJ)
IC305	6-707-855-01	s	IC TC74LCX574FT(EKJ)
IC306	6-707-855-01	s	IC TC74LCX574FT(EKJ)
IC307	6-706-342-01	s	IC IDT5V2528APGGI
IC401	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC502	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC503	6-705-514-01	s	IC MAX3222IPWR
IC504	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC601	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC602	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC603	6-708-324-01	s	IC R3112N301A-TR-FA
IC604	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC605	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC702	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC703	6-700-421-01	s	IC SN74LVCH16245ADGGR
IC704	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC705	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC706	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC707	6-707-876-01	s	IC TC74VHC273FT(EKJ)
IC708	6-707-839-01	s	IC TC74LCX04FT(EKJ)
IC901	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1001	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1002	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1003	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1004	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1005	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1006	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1007	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1101	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1102	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1103	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1104	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC1105	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1106	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC1401	6-701-870-01	s	IC THC63LVDF84B-T
IC1402	6-701-870-01	s	IC THC63LVDF84B-T
IC1403	6-701-870-01	s	IC THC63LVDF84B-T
IC1601	6-701-098-11	s	IC THC63LVDM83R-T
IC1602	6-701-098-11	s	IC THC63LVDM83R-T
IC1603	6-701-098-11	s	IC THC63LVDM83R-T
IC1604	6-701-098-11	s	IC THC63LVDM83R-T
IC1605	6-701-098-11	s	IC THC63LVDM83R-T
IC1702	8-759-388-62	s	IC NJU7062M(TE2)
IC1803	8-759-388-62	s	IC NJU7062M(TE2)
IC2702	8-759-388-62	s	IC NJU7062M(TE2)
L301	1-416-344-21	s	COIL, CHOKE 10UH
Q101	8-729-929-09	s	TRANSISTOR DTC123JE-TL

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q102	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q103	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q104	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q105	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q106	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R101	1-208-927-81	s	RES, CHIP 47K (1005)
R102	1-208-927-81	s	RES, CHIP 47K (1005)
R103	1-208-927-81	s	RES, CHIP 47K (1005)
R104	1-208-927-81	s	RES, CHIP 47K (1005)
R105	1-208-927-81	s	RES, CHIP 47K (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R113	1-208-887-81	s	RES, CHIP 1.0K (1005)
R114	1-208-925-81	s	RES, CHIP 39K (1005)
R115	1-208-895-81	s	RES, CHIP 2.2K (1005)
R116	1-208-925-81	s	RES, CHIP 39K (1005)
R117	1-208-895-81	s	RES, CHIP 2.2K (1005)
R118	1-208-907-81	s	RES, CHIP 6.8K (1005)
R119	1-208-895-81	s	RES, CHIP 2.2K (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R121	1-208-911-81	s	RES, CHIP 10K (1005)
R122	1-208-895-81	s	RES, CHIP 2.2K (1005)
R123	1-208-911-81	s	RES, CHIP 10K (1005)
R124	1-208-903-81	s	RES, CHIP 4.7K (1005)
R125	1-208-903-81	s	RES, CHIP 4.7K (1005)
R126	1-208-903-81	s	RES, CHIP 4.7K (1005)
R127	1-208-903-81	s	RES, CHIP 4.7K (1005)
R128	1-208-903-81	s	RES, CHIP 4.7K (1005)
R129	1-208-927-81	s	RES, CHIP 47K (1005)
R130	1-208-943-81	s	RES, CHIP 220K (1005)
R133	1-208-927-81	s	RES, CHIP 47K (1005)
R134	1-208-903-81	s	RES, CHIP 4.7K (1005)
R135	1-208-903-81	s	RES, CHIP 4.7K (1005)
R136	1-208-903-81	s	RES, CHIP 4.7K (1005)
R138	1-208-903-81	s	RES, CHIP 4.7K (1005)
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R205	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-935-81	s	RES, CHIP 100K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R211	1-208-895-81	s	RES, CHIP 2.2K (1005)
R212	1-208-935-81	s	RES, CHIP 100K (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-903-81	s	RES, CHIP 4.7K (1005)
R217	1-208-895-81	s	RES, CHIP 2.2K (1005)
R218	1-208-935-81	s	RES, CHIP 100K (1005)
R219	1-208-903-81	s	RES, CHIP 4.7K (1005)
R220	1-208-903-81	s	RES, CHIP 4.7K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-895-81	s	RES, CHIP 2.2K (1005)
R225	1-208-935-81	s	RES, CHIP 100K (1005)
R226	1-208-911-81	s	RES, CHIP 10K (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-911-81	s	RES, CHIP 10K (1005)
R229	1-208-911-81	s	RES, CHIP 10K (1005)
R230	1-208-903-81	s	RES, CHIP 4.7K (1005)
R231	1-208-895-81	s	RES, CHIP 2.2K (1005)
R232	1-208-935-81	s	RES, CHIP 100K (1005)
R233	1-208-919-81	s	RES, CHIP 22K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-903-81	s	RES, CHIP 4.7K (1005)
R237	1-208-895-81	s	RES, CHIP 2.2K (1005)
R238	1-208-935-81	s	RES, CHIP 100K (1005)
R239	1-208-911-81	s	RES, CHIP 10K (1005)
R240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R241	1-208-895-81	s	RES, CHIP 2.2K (1005)
R301	1-208-863-81	s	RES, CHIP 100 (1005)
R302	1-208-863-81	s	RES, CHIP 100 (1005)
R303	1-208-863-81	s	RES, CHIP 100 (1005)
R304	1-208-863-81	s	RES, CHIP 100 (1005)
R305	1-208-863-81	s	RES, CHIP 100 (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-220-878-81	s	RES, CHIP 22 (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-903-81	s	RES, CHIP 4.7K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-208-855-81	s	RES, CHIP 47 (1005)
R329	1-208-903-81	s	RES, CHIP 4.7K (1005)
R331	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-855-81	s	RES, CHIP 47 (1005)
R334	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R335	1-208-855-81	s	RES, CHIP 47 (1005)
R336	1-208-935-81	s	RES, CHIP 100K (1005)
R337	1-220-878-81	s	RES, CHIP 22 (1005)
R338	1-220-878-81	s	RES, CHIP 22 (1005)
R339	1-220-878-81	s	RES, CHIP 22 (1005)
R340	1-220-878-81	s	RES, CHIP 22 (1005)
R341	1-220-878-81	s	RES, CHIP 22 (1005)
R342	1-220-878-81	s	RES, CHIP 22 (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R344	1-220-878-81	s	RES, CHIP 22 (1005)
R345	1-220-878-81	s	RES, CHIP 22 (1005)
R346	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R408	1-208-879-81	s	RES, CHIP 470 (1005)
R409	1-208-879-81	s	RES, CHIP 470 (1005)
R501	1-208-927-81	s	RES, CHIP 47K (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-208-935-81	s	RES, CHIP 100K (1005)
R506	1-208-935-81	s	RES, CHIP 100K (1005)
R507	1-220-878-81	s	RES, CHIP 22 (1005)
R508	1-220-878-81	s	RES, CHIP 22 (1005)
R509	1-220-878-81	s	RES, CHIP 22 (1005)
R510	1-208-863-81	s	RES, CHIP 100 (1005)
R511	1-208-935-81	s	RES, CHIP 100K (1005)
R512	1-208-935-81	s	RES, CHIP 100K (1005)
R513	1-208-935-81	s	RES, CHIP 100K (1005)
R514	1-208-935-81	s	RES, CHIP 100K (1005)
R601	1-208-935-81	s	RES, CHIP 100K (1005)
R603	1-208-935-81	s	RES, CHIP 100K (1005)
R604	1-208-863-81	s	RES, CHIP 100 (1005)
R605	1-208-935-81	s	RES, CHIP 100K (1005)
R606	1-208-871-81	s	RES, CHIP 220 (1005)
R607	1-208-887-81	s	RES, CHIP 1.0K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-935-81	s	RES, CHIP 100K (1005)
R701	1-208-911-81	s	RES, CHIP 10K (1005)
R702	1-208-911-81	s	RES, CHIP 10K (1005)
R703	1-208-911-81	s	RES, CHIP 10K (1005)
R704	1-208-911-81	s	RES, CHIP 10K (1005)
R705	1-208-911-81	s	RES, CHIP 10K (1005)
R706	1-208-911-81	s	RES, CHIP 10K (1005)
R707	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-208-911-81	s	RES, CHIP 10K (1005)
R802	1-208-911-81	s	RES, CHIP 10K (1005)
R804	1-208-911-81	s	RES, CHIP 10K (1005)
R805	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-220-878-81	s	RES, CHIP 22 (1005)
R904	1-220-878-81	s	RES, CHIP 22 (1005)
R1001	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1002	1-208-879-81	s	RES, CHIP 470 (1005)
R1003	1-208-879-81	s	RES, CHIP 470 (1005)
R1004	1-208-863-81	s	RES, CHIP 100 (1005)
R1005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1006	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1007	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1008	1-208-911-81	s	RES, CHIP 10K (1005)
R1009	1-208-911-81	s	RES, CHIP 10K (1005)
R1011	1-208-879-81	s	RES, CHIP 470 (1005)
R1012	1-208-863-81	s	RES, CHIP 100 (1005)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1103	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1104	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1105	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1106	1-208-863-81	s	RES, CHIP 100 (1005)
R1107	1-208-911-81	s	RES, CHIP 10K (1005)
R1108	1-208-863-81	s	RES, CHIP 100 (1005)
R1109	1-208-863-81	s	RES, CHIP 100 (1005)
R1110	1-208-879-81	s	RES, CHIP 470 (1005)
R1111	1-208-879-81	s	RES, CHIP 470 (1005)
R1113	1-208-863-81	s	RES, CHIP 100 (1005)
R1114	1-208-863-81	s	RES, CHIP 100 (1005)
R1115	1-208-863-81	s	RES, CHIP 100 (1005)
R1401	1-208-911-81	s	RES, CHIP 10K (1005)
R1402	1-208-911-81	s	RES, CHIP 10K (1005)
R1403	1-208-863-81	s	RES, CHIP 100 (1005)
R1404	1-208-863-81	s	RES, CHIP 100 (1005)
R1405	1-208-863-81	s	RES, CHIP 100 (1005)
R1406	1-208-863-81	s	RES, CHIP 100 (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-208-911-81	s	RES, CHIP 10K (1005)
R1409	1-208-911-81	s	RES, CHIP 10K (1005)
R1410	1-208-863-81	s	RES, CHIP 100 (1005)
R1411	1-208-863-81	s	RES, CHIP 100 (1005)
R1412	1-208-863-81	s	RES, CHIP 100 (1005)
R1413	1-208-863-81	s	RES, CHIP 100 (1005)
R1414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1415	1-208-911-81	s	RES, CHIP 10K (1005)
R1416	1-208-911-81	s	RES, CHIP 10K (1005)
R1417	1-208-863-81	s	RES, CHIP 100 (1005)
R1418	1-208-863-81	s	RES, CHIP 100 (1005)
R1419	1-208-863-81	s	RES, CHIP 100 (1005)
R1420	1-208-863-81	s	RES, CHIP 100 (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1504	1-208-863-81	s	RES, CHIP 100 (1005)
R1506	1-208-863-81	s	RES, CHIP 100 (1005)
R1507	1-208-863-81	s	RES, CHIP 100 (1005)
R1601	1-208-855-81	s	RES, CHIP 47 (1005)
R1602	1-208-855-81	s	RES, CHIP 47 (1005)
R1603	1-208-911-81	s	RES, CHIP 10K (1005)
R1604	1-208-911-81	s	RES, CHIP 10K (1005)
R1605	1-208-911-81	s	RES, CHIP 10K (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-855-81	s	RES, CHIP 47 (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-855-81	s	RES, CHIP 47 (1005)
R1611	1-208-855-81	s	RES, CHIP 47 (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1701	1-208-863-81	s	RES, CHIP 100 (1005)
R1702	1-208-911-81	s	RES, CHIP 10K (1005)
R1703	1-208-911-81	s	RES, CHIP 10K (1005)
R1704	1-208-855-81	s	RES, CHIP 47 (1005)
R1705	1-208-855-81	s	RES, CHIP 47 (1005)
R1706	1-208-863-81	s	RES, CHIP 100 (1005)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1801	1-208-863-81	s	RES, CHIP 100 (1005)
R1802	1-208-863-81	s	RES, CHIP 100 (1005)
R1803	1-208-911-81	s	RES, CHIP 10K (1005)
R1804	1-208-911-81	s	RES, CHIP 10K (1005)
R1805	1-208-855-81	s	RES, CHIP 47 (1005)
R1806	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-863-81	s	RES, CHIP 100 (1005)
R1902	1-208-863-81	s	RES, CHIP 100 (1005)
R2001	1-208-863-81	s	RES, CHIP 100 (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2102	1-208-911-81	s	RES, CHIP 10K (1005)
R2104	1-208-911-81	s	RES, CHIP 10K (1005)
R2201	1-220-878-81	s	RES, CHIP 22 (1005)
R2202	1-208-911-81	s	RES, CHIP 10K (1005)
R2204	1-208-911-81	s	RES, CHIP 10K (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-208-911-81	s	RES, CHIP 10K (1005)
R2304	1-208-911-81	s	RES, CHIP 10K (1005)
R2401	1-220-878-81	s	RES, CHIP 22 (1005)
R2402	1-208-911-81	s	RES, CHIP 10K (1005)
R2404	1-208-911-81	s	RES, CHIP 10K (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)
R2502	1-208-911-81	s	RES, CHIP 10K (1005)
R2504	1-208-911-81	s	RES, CHIP 10K (1005)
R2601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2605	1-208-911-81	s	RES, CHIP 10K (1005)
R2607	1-208-911-81	s	RES, CHIP 10K (1005)
R2608	1-208-911-81	s	RES, CHIP 10K (1005)
R2701	1-208-863-81	s	RES, CHIP 100 (1005)
R2702	1-208-911-81	s	RES, CHIP 10K (1005)
R2703	1-208-911-81	s	RES, CHIP 10K (1005)
R2704	1-208-855-81	s	RES, CHIP 47 (1005)
R2705	1-208-855-81	s	RES, CHIP 47 (1005)
R2706	1-208-863-81	s	RES, CHIP 100 (1005)
R2801	1-208-855-81	s	RES, CHIP 47 (1005)
R2802	1-208-855-81	s	RES, CHIP 47 (1005)
R2803	1-208-855-81	s	RES, CHIP 47 (1005)
R2804	1-208-855-81	s	RES, CHIP 47 (1005)
R2805	1-208-855-81	s	RES, CHIP 47 (1005)
R2806	1-208-855-81	s	RES, CHIP 47 (1005)
R2807	1-208-855-81	s	RES, CHIP 47 (1005)
R2808	1-208-855-81	s	RES, CHIP 47 (1005)
R2901	1-208-855-81	s	RES, CHIP 47 (1005)
R2902	1-208-855-81	s	RES, CHIP 47 (1005)
R2903	1-208-855-81	s	RES, CHIP 47 (1005)
R2904	1-208-855-81	s	RES, CHIP 47 (1005)
R2905	1-208-855-81	s	RES, CHIP 47 (1005)
R2906	1-208-855-81	s	RES, CHIP 47 (1005)
R2907	1-208-855-81	s	RES, CHIP 47 (1005)
R2908	1-208-855-81	s	RES, CHIP 47 (1005)
R2909	1-208-855-81	s	RES, CHIP 47 (1005)
R2910	1-208-855-81	s	RES, CHIP 47 (1005)
R2911	1-208-855-81	s	RES, CHIP 47 (1005)
R2912	1-208-855-81	s	RES, CHIP 47 (1005)
R2913	1-208-855-81	s	RES, CHIP 47 (1005)
R2914	1-208-855-81	s	RES, CHIP 47 (1005)
R2915	1-208-855-81	s	RES, CHIP 47 (1005)
R2916	1-208-855-81	s	RES, CHIP 47 (1005)
R2917	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2918	1-208-855-81	s	RES, CHIP 47 (1005)
R3101	1-208-855-81	s	RES, CHIP 47 (1005)
R3102	1-208-855-81	s	RES, CHIP 47 (1005)
R3103	1-208-855-81	s	RES, CHIP 47 (1005)
R3104	1-208-855-81	s	RES, CHIP 47 (1005)
R3105	1-208-855-81	s	RES, CHIP 47 (1005)
R3106	1-208-855-81	s	RES, CHIP 47 (1005)
R3107	1-208-855-81	s	RES, CHIP 47 (1005)
R3108	1-208-855-81	s	RES, CHIP 47 (1005)
RB301	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB302	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB303	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB304	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB305	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB306	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB307	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB308	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB309	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB310	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB311	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB603	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB608	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB613	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB614	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB701	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB702	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB703	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB704	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB705	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB706	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB707	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB716	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB717	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB718	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB719	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB720	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB721	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB722	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB723	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB724	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB725	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB726	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB727	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB728	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB729	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB730	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB731	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB732	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB906	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB907	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB908	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB909	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1001	1-234-374-21	s	RES, NETWORK 470 (1005X4)
RB1002	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1003	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1008	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1013	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1014	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1015	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1016	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1017	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1018	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1101	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1102	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1103	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1104	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1105	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1106	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1201	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1202	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1203	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1204	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1205	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1206	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1207	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1208	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1209	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1210	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1211	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1212	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1213	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1214	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1215	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1216	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1217	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1218	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1219	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1220	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1221	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1222	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1223	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1224	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1225	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1226	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1227	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1228	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1229	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1230	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1231	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1232	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1233	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1234	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1235	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1236	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1237	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1238	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1239	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1240	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1241	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1242	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1243	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1244	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1245	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1246	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1301	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1302	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1303	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1304	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1305	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1306	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1307	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1308	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1309	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1310	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1311	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1312	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1313	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1314	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1315	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1316	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1317	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1318	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1319	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1320	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1321	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1322	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1323	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1324	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1325	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1326	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1327	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1328	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1329	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1330	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1331	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1332	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1333	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1334	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1335	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1336	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1337	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1338	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1339	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1340	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1341	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1342	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1343	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1344	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1345	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1346	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1408	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1409	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1410	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1411	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1412	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1413	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1414	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1415	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2116	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2117	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2119	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2120	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2121	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2122	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2123	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2124	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2201	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2203	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2213	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2214	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2215	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2216	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2217	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2223	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2224	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2301	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2302	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2303	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2304	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2305	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2306	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2307	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2308	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2309	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2310	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2311	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2312	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2313	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2314	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2315	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2316	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2317	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2318	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2319	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2320	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2321	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2322	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2323	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2324	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2408	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2409	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2410	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2411	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2412	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2413	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2414	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(DVP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2415	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2416	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2417	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2418	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2419	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2420	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2421	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2422	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2423	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2424	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2504	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2508	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2509	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2510	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2511	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2512	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2513	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2514	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2515	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2516	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2517	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2518	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2519	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2520	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2521	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2522	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2523	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2524	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S501	1-771-721-21	s	SWITCH, TACTILE
S701	1-692-271-41	s	SWITCH, SLIDE
TP1	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP103	1-535-877-22	s	CHIP, CHECKER
TP104	1-535-877-22	s	CHIP, CHECKER
TP105	1-535-877-22	s	CHIP, CHECKER
TP106	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP304	1-535-877-22	s	CHIP, CHECKER
TP305	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP702	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER

FC-109 BOARD
---
*1: Suffix 11
*2: Suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
6pcs	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
2pcs	7-626-300-54	s	SPRING PIN 3X6
2pcs	7-682-946-01	s	SCREW +PSW 3X5
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C203	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C204	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C205	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C206	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C207	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-986-21	s	CAP, ELECT 330MF
C237	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C238	1-100-986-21	s	CAP, ELECT 330MF
C239	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C240	1-100-986-21	s	CAP, ELECT 330MF
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-100-986-21	s	CAP, ELECT 330MF
C243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C301	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C302	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C304	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C305	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C306	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C307	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C308	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C313	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C314	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C315	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C316	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C317	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C319	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C320	1-128-414-21	s	CAP, CHIP ELECT 220MF
C321	1-128-414-21	s	CAP, CHIP ELECT 220MF
C322	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C323	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C324	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C325	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C326	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C327	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C328	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C329	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C333	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C334	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C335	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C336	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C337	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C338	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C339	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C340	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C341	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C345	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C401	1-107-420-21	s	CAP, CHIP ELECT 47MF
C402	1-107-420-21	s	CAP, CHIP ELECT 47MF
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C501	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C813	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1305	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1306	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1307	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1308	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1309	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1310	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1311	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1312	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1313	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1314	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1315	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1316	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1403	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1404	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1406	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1408	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1409	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1410	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1411	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1412	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1413	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1414	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1415	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1416	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1429	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1430	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1431	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1432	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1433	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1434	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1435	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1436	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1437	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1438	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1439	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1440	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1441	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1442	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1443	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1444	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1519	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1525	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1526	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1527	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1528	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1532	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1537	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1540	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1542	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1547	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1557	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1561	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1568	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1570	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1572	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1576	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1577	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1580	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1582	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1584	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1586	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1588	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1589	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1590	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1591	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1592	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1593	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1594	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1595	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1596	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1598	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
*2 C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1704	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1710	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1719	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1725	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1726	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1727	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1728	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1732	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1737	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1740	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1741	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1742	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1747	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1757	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1761	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1768	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1770	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1772	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1777	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1780	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1782	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1790	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1797	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1799	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1802 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1803 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1804 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1807 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1808 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1904	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1906	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1910	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1913	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1919	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1925	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1926	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1927	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1928	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1932	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1937	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1940	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1942	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1947	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1957	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1961	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1968	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1970	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1972	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1973	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1974	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1975	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1976	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1977	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1978	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1980	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1981	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1982	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1983	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1984	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1985	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1986	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1987	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1988	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1989	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1990	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1991	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1992	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1993	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1995	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1996	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1997	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1999	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2104	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2113	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2119	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2125	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2126	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2127	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2128	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2132	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2137	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2142	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2147	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2157	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2161	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2168	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2170	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2172	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2177	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2180	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2182	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2201 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2202 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2203 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2310	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2313	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2319	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2325	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2326	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2327	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2328	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2332	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2337	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2340	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2342	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2347	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2357	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2361	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2368	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2370	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2372	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2374	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2376	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2377	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2380	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2382	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2384	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2386	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2387	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2388	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2389	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2392	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2394	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2395	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2396	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2397	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2398	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2399	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2401 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2402 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2403 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2404 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2407 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2504	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2510	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2513	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2519	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2525	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2526	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2527	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2528	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2532	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2537	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2540	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2542	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2547	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2557	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2561	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2568	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2570	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2572	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2576	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2577	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2580	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2582	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2584	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2586	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2588	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2589	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2590	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2591	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2592	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2593	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2594	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2595	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2596	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2598	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2601 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2602 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2603 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2604 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2605 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2606 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2607 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2608 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2704	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2706	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2710	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2713	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2719	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2725	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2726	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2727	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2728	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2732	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2737	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2740	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2741	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2742	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2747	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2757	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2761	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2768	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2770	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2772	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2777	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2780	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2782	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2790	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2797	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2799	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2801 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2802 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2803 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2804 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2806 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2807 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2808 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2904	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2906	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2910	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2913	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2919	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2925	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2926	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2927	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2928	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2932	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2937	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2940	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2942	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2947	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2957	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2961	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2968	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2970	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2972	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2973	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2974	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2975	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2976	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2977	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2978	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2980	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2981	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2982	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2983	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2984	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2985	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2986	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2987	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2988	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2989	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2990	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2991	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2992	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2993	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2995	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2996	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2997	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2999	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3001 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3002 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3003 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3004 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3005 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3006 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3007 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3008 *2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3104	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3105	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3106	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3107	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3117	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3122	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3123	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3124	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3135	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3151	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3152	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3153	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3154	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3155	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3159	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3257	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3263	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3266	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3267	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3271	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3272	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3273	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3278	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3279	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3282	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3283	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3284	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3286	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3287	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3289	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3290	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3291	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3292	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3313	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3314	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3317	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3318	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3319	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3320	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3322	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3323	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3325	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3326	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3327	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3328	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4001	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4002	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4029	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4030	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4031	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4032	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4033	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4034	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4052	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4053	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4054	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4057	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4059	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4062	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4065	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4067	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4068	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4069	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4072	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4074	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4076	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4078	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4084	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4095	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4096	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4097	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4098	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4099	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4113	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4115	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4116	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4501	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4502	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4528	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4529	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4530	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4531	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4532	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4533	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4534	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4544	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4546	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4547	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4549	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4552	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4553	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4554	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4559	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4561	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4562	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4568	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4584	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4586	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4588	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4589	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4590	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4591	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4592	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4593	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4594	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4595	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4596	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4598	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4600	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4604	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4608	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4613	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4615	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4616	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN401	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN402	1-779-754-11	o	CONNECTOR, BOARD TO BOARD 40P
CN1201	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D201	8-719-069-28	s	DIODE 1SS400TE-61
D202	8-719-069-28	s	DIODE 1SS400TE-61
D203	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-074-31	s	DIODE CL-196YG-CD-T
D302	8-719-074-31	s	DIODE CL-196YG-CD-T
D303	8-719-074-31	s	DIODE CL-196YG-CD-T
D304	8-719-074-31	s	DIODE CL-196YG-CD-T
D401	8-719-074-31	s	DIODE CL-196YG-CD-T
D402	8-719-074-31	s	DIODE CL-196YG-CD-T
D801	8-719-077-09	s	DIODE CL-196HR-CD-T
D802	8-719-077-09	s	DIODE CL-196HR-CD-T
DD201	1-480-011-11	s	CONVERTER, DC-DC
DD202	1-480-011-11	s	CONVERTER, DC-DC
DD203	1-480-011-11	s	CONVERTER, DC-DC
DD204	1-480-011-11	s	CONVERTER, DC-DC
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
E19	1-535-877-22	s	CHIP, CHECKER
E20	1-535-877-22	s	CHIP, CHECKER

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E21	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3104	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3105	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC201	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC301	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC302	8-759-581-89	s	IC LM317SX
IC303	8-759-581-89	s	IC LM317SX
IC304	6-703-449-01	s	IC LP2995MX
IC305	6-703-449-01	s	IC LP2995MX
IC306	6-703-449-01	s	IC LP2995MX
IC307	6-703-449-01	s	IC LP2995MX
IC308	8-759-338-95	s	IC NJM2903V(TE2)
IC309	8-759-338-95	s	IC NJM2903V(TE2)
IC401	8-759-392-77	s	IC SN74LVC245APWR
IC402	8-759-639-85	s	IC SN65LVDS31DR
IC403	8-759-639-85	s	IC SN65LVDS31DR
IC404	8-759-639-85	s	IC SN65LVDS31DR
IC501	8-759-669-44	s	IC SN74LVC74APWR-12
IC502	6-709-646-01	s	IC TLC2933AIPWR
IC503	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC504	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC505	8-759-388-62	s	IC NJU7062M(TE2)
IC506	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC507	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC508	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC509	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC510	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC511	8-759-639-85	s	IC SN65LVDS31DR
IC601	8-759-639-86	s	IC SN65LVDS32DR
IC602	6-709-646-01	s	IC TLC2933AIPWR
IC603	8-759-392-77	s	IC SN74LVC245APWR
IC604	8-759-388-62	s	IC NJU7062M(TE2)
IC605	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC606	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC607	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC608	8-759-669-44	s	IC SN74LVC74APWR-12
IC609	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC610	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC611	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC612	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC613	8-759-639-85	s	IC SN65LVDS31DR
IC701	8-759-639-86	s	IC SN65LVDS32DR
IC702	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC703	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC801	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC901	8-759-392-81	s	IC SN74LVC16245ADGGR
IC902	8-759-392-81	s	IC SN74LVC16245ADGGR
IC903	8-759-392-77	s	IC SN74LVC245APWR

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC904	8-759-392-77	s	IC SN74LVC245APWR
IC1001	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1002	6-710-018-01	s	IC CAT24C02WI-GT3
IC1003	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC1004	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1005	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1202	8-759-392-77	s	IC SN74LVC245APWR
IC1203	8-759-392-77	s	IC SN74LVC245APWR
IC1401	6-702-956-01	s	IC MC100LVEL17DWR2
IC1402	6-702-956-01	s	IC MC100LVEL17DWR2
IC1501*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1502*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1701*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1702*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1901*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC1902*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2101*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2102*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2301*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2302*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2501*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2502*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2701*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2702*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2901*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC2902*1	6-706-350-01	s	IC EDD2516AKTA-6B-E
*2	6-710-620-01	s	IC EDD2516AETA-5B-E
IC3501	6-706-224-01	s	IC ADM1032ARMZ-R7
IC3502	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4001	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4501	6-706-224-01	s	IC ADM1032ARMZ-R7
L201	1-416-344-21	s	COIL, CHOKE 10UH
L501	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L601	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L1500	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1700	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1900	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1901	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2100	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2300	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2301	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2500	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L2700	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2900	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2901	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L3101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3105	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3106	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3107	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3108	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3109	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3110	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3111	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3112	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3113	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3114	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4004	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4005	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4006	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4505	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4506	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q310	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q311	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q502	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q503	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q601	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q602	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q603	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R202	1-208-903-81	s	RES, CHIP 4.7K (1005)
R203	1-208-895-81	s	RES, CHIP 2.2K (1005)
R204	1-208-943-81	s	RES, CHIP 220K (1005)
R205	1-208-927-81	s	RES, CHIP 47K (1005)
R206	1-208-903-81	s	RES, CHIP 4.7K (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-208-911-81	s	RES, CHIP 10K (1005)
R210	1-208-911-81	s	RES, CHIP 10K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-208-919-81	s	RES, CHIP 22K (1005)
R213	1-208-919-81	s	RES, CHIP 22K (1005)
R214	1-208-879-81	s	RES, CHIP 470 (1005)
R215	1-208-895-81	s	RES, CHIP 2.2K (1005)
R216	1-208-919-81	s	RES, CHIP 22K (1005)
R217	1-208-919-81	s	RES, CHIP 22K (1005)
R218	1-208-919-81	s	RES, CHIP 22K (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
R222	1-208-887-81	s	RES, CHIP 1.0K (1005)
R223	1-208-895-81	s	RES, CHIP 2.2K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-903-81	s	RES, CHIP 4.7K (1005)
R226	1-208-903-81	s	RES, CHIP 4.7K (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-863-81	s	RES, CHIP 100 (1005)
R302	1-208-879-81	s	RES, CHIP 470 (1005)
R303	1-208-895-81	s	RES, CHIP 2.2K (1005)
R304	1-208-863-81	s	RES, CHIP 100 (1005)
R305	1-208-879-81	s	RES, CHIP 470 (1005)
R306	1-208-895-81	s	RES, CHIP 2.2K (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R311	1-208-903-81	s	RES, CHIP 4.7K (1005)
R312	1-208-903-81	s	RES, CHIP 4.7K (1005)
R313	1-208-911-81	s	RES, CHIP 10K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-887-81	s	RES, CHIP 1.0K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R320	1-208-911-81	s	RES, CHIP 10K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-903-81	s	RES, CHIP 4.7K (1005)
R323	1-208-895-81	s	RES, CHIP 2.2K (1005)
R324	1-208-935-81	s	RES, CHIP 100K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-911-81	s	RES, CHIP 10K (1005)
R328	1-208-911-81	s	RES, CHIP 10K (1005)
R329	1-208-903-81	s	RES, CHIP 4.7K (1005)
R330	1-208-895-81	s	RES, CHIP 2.2K (1005)
R331	1-208-935-81	s	RES, CHIP 100K (1005)
R332	1-208-919-81	s	RES, CHIP 22K (1005)
R333	1-208-911-81	s	RES, CHIP 10K (1005)
R334	1-208-911-81	s	RES, CHIP 10K (1005)
R335	1-208-903-81	s	RES, CHIP 4.7K (1005)
R336	1-208-895-81	s	RES, CHIP 2.2K (1005)
R337	1-208-935-81	s	RES, CHIP 100K (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R338	1-208-911-81	s	RES, CHIP 10K (1005)
R339	1-208-903-81	s	RES, CHIP 4.7K (1005)
R340	1-208-895-81	s	RES, CHIP 2.2K (1005)
R401	1-208-887-81	s	RES, CHIP 1.0K (1005)
R402	1-208-887-81	s	RES, CHIP 1.0K (1005)
R403	1-208-860-81	s	RES, CHIP 75 (1005)
R404	1-208-860-81	s	RES, CHIP 75 (1005)
R405	1-208-860-81	s	RES, CHIP 75 (1005)
R406	1-208-860-81	s	RES, CHIP 75 (1005)
R407	1-208-860-81	s	RES, CHIP 75 (1005)
R408	1-208-860-81	s	RES, CHIP 75 (1005)
R409	1-208-860-81	s	RES, CHIP 75 (1005)
R410	1-208-860-81	s	RES, CHIP 75 (1005)
R411	1-208-860-81	s	RES, CHIP 75 (1005)
R412	1-208-860-81	s	RES, CHIP 75 (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-208-911-81	s	RES, CHIP 10K (1005)
R503	1-219-570-91	s	RES, CHIP 10M (1608)
R504	1-208-935-81	s	RES, CHIP 100K (1005)
R505	1-208-943-81	s	RES, CHIP 220K (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-919-81	s	RES, CHIP 22K (1005)
R509	1-220-878-81	s	RES, CHIP 22 (1005)
R510	1-220-870-81	s	RES, CHIP 10 (1005)
R511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R517	1-220-878-81	s	RES, CHIP 22 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-220-878-81	s	RES, CHIP 22 (1005)
R604	1-220-878-81	s	RES, CHIP 22 (1005)
R605	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-219-570-91	s	RES, CHIP 10M (1608)
R609	1-208-935-81	s	RES, CHIP 100K (1005)
R610	1-208-943-81	s	RES, CHIP 220K (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R614	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-220-878-81	s	RES, CHIP 22 (1005)
R616	1-220-878-81	s	RES, CHIP 22 (1005)
R617	1-220-870-81	s	RES, CHIP 10 (1005)
R618	1-208-911-81	s	RES, CHIP 10K (1005)
R620	1-208-919-81	s	RES, CHIP 22K (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R701	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R702	1-208-863-81	s	RES, CHIP 100 (1005)
R703	1-208-867-81	s	RES, CHIP 150 (1005)
R704	1-208-867-81	s	RES, CHIP 150 (1005)
R705	1-208-867-81	s	RES, CHIP 150 (1005)
R706	1-208-867-81	s	RES, CHIP 150 (1005)
R707	1-208-887-81	s	RES, CHIP 1.0K (1005)
R709	1-208-887-81	s	RES, CHIP 1.0K (1005)
R711	1-220-878-81	s	RES, CHIP 22 (1005)
R712	1-220-878-81	s	RES, CHIP 22 (1005)
R713	1-220-878-81	s	RES, CHIP 22 (1005)
R714	1-220-878-81	s	RES, CHIP 22 (1005)
R715	1-220-878-81	s	RES, CHIP 22 (1005)
R716	1-220-878-81	s	RES, CHIP 22 (1005)
R717	1-220-878-81	s	RES, CHIP 22 (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R719	1-220-878-81	s	RES, CHIP 22 (1005)
R720	1-220-878-81	s	RES, CHIP 22 (1005)
R721	1-220-878-81	s	RES, CHIP 22 (1005)
R722	1-220-878-81	s	RES, CHIP 22 (1005)
R723	1-220-878-81	s	RES, CHIP 22 (1005)
R724	1-220-878-81	s	RES, CHIP 22 (1005)
R725	1-220-878-81	s	RES, CHIP 22 (1005)
R726	1-220-878-81	s	RES, CHIP 22 (1005)
R727	1-220-878-81	s	RES, CHIP 22 (1005)
R728	1-220-878-81	s	RES, CHIP 22 (1005)
R729	1-220-878-81	s	RES, CHIP 22 (1005)
R730	1-220-878-81	s	RES, CHIP 22 (1005)
R731	1-220-878-81	s	RES, CHIP 22 (1005)
R732	1-220-878-81	s	RES, CHIP 22 (1005)
R733	1-220-878-81	s	RES, CHIP 22 (1005)
R734	1-220-878-81	s	RES, CHIP 22 (1005)
R735	1-220-878-81	s	RES, CHIP 22 (1005)
R736	1-220-878-81	s	RES, CHIP 22 (1005)
R737	1-220-878-81	s	RES, CHIP 22 (1005)
R738	1-220-878-81	s	RES, CHIP 22 (1005)
R739	1-220-878-81	s	RES, CHIP 22 (1005)
R740	1-220-878-81	s	RES, CHIP 22 (1005)
R741	1-220-878-81	s	RES, CHIP 22 (1005)
R742	1-220-878-81	s	RES, CHIP 22 (1005)
R743	1-220-878-81	s	RES, CHIP 22 (1005)
R744	1-220-878-81	s	RES, CHIP 22 (1005)
R745	1-220-878-81	s	RES, CHIP 22 (1005)
R746	1-220-878-81	s	RES, CHIP 22 (1005)
R747	1-220-878-81	s	RES, CHIP 22 (1005)
R748	1-220-878-81	s	RES, CHIP 22 (1005)
R749	1-220-878-81	s	RES, CHIP 22 (1005)
R750	1-220-878-81	s	RES, CHIP 22 (1005)
R751	1-220-878-81	s	RES, CHIP 22 (1005)
R752	1-220-878-81	s	RES, CHIP 22 (1005)
R753	1-220-878-81	s	RES, CHIP 22 (1005)
R754	1-220-878-81	s	RES, CHIP 22 (1005)
R755	1-220-878-81	s	RES, CHIP 22 (1005)
R756	1-220-878-81	s	RES, CHIP 22 (1005)
R757	1-220-878-81	s	RES, CHIP 22 (1005)
R758	1-220-878-81	s	RES, CHIP 22 (1005)
R759	1-220-878-81	s	RES, CHIP 22 (1005)
R760	1-220-878-81	s	RES, CHIP 22 (1005)
R761	1-220-878-81	s	RES, CHIP 22 (1005)
R762	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R763	1-220-878-81	s	RES, CHIP 22 (1005)
R764	1-220-878-81	s	RES, CHIP 22 (1005)
R765	1-220-878-81	s	RES, CHIP 22 (1005)
R766	1-220-878-81	s	RES, CHIP 22 (1005)
R771	1-208-927-81	s	RES, CHIP 47K (1005)
R773	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R774	1-208-887-81	s	RES, CHIP 1.0K (1005)
R775	1-208-855-81	s	RES, CHIP 47 (1005)
R776	1-208-887-81	s	RES, CHIP 1.0K (1005)
R779	1-208-887-81	s	RES, CHIP 1.0K (1005)
R780	1-208-855-81	s	RES, CHIP 47 (1005)
R781	1-208-887-81	s	RES, CHIP 1.0K (1005)
R801	1-220-878-81	s	RES, CHIP 22 (1005)
R802	1-220-878-81	s	RES, CHIP 22 (1005)
R803	1-220-878-81	s	RES, CHIP 22 (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-208-935-81	s	RES, CHIP 100K (1005)
R806	1-208-935-81	s	RES, CHIP 100K (1005)
R807	1-208-935-81	s	RES, CHIP 100K (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-208-911-81	s	RES, CHIP 10K (1005)
R811	1-208-911-81	s	RES, CHIP 10K (1005)
R812	1-208-911-81	s	RES, CHIP 10K (1005)
R813	1-208-911-81	s	RES, CHIP 10K (1005)
R814	1-208-911-81	s	RES, CHIP 10K (1005)
R815	1-208-911-81	s	RES, CHIP 10K (1005)
R816	1-208-911-81	s	RES, CHIP 10K (1005)
R817	1-208-911-81	s	RES, CHIP 10K (1005)
R818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-208-887-81	s	RES, CHIP 1.0K (1005)
R828	1-220-878-81	s	RES, CHIP 22 (1005)
R829	1-220-878-81	s	RES, CHIP 22 (1005)
R830	1-220-878-81	s	RES, CHIP 22 (1005)
R831	1-220-878-81	s	RES, CHIP 22 (1005)
R832	1-220-878-81	s	RES, CHIP 22 (1005)
R833	1-220-878-81	s	RES, CHIP 22 (1005)
R834	1-220-878-81	s	RES, CHIP 22 (1005)
R835	1-220-878-81	s	RES, CHIP 22 (1005)
R836	1-220-878-81	s	RES, CHIP 22 (1005)
R837	1-220-878-81	s	RES, CHIP 22 (1005)
R838	1-220-878-81	s	RES, CHIP 22 (1005)
R839	1-220-878-81	s	RES, CHIP 22 (1005)
R840	1-220-878-81	s	RES, CHIP 22 (1005)
R841	1-220-878-81	s	RES, CHIP 22 (1005)
R842	1-220-878-81	s	RES, CHIP 22 (1005)
R843	1-220-878-81	s	RES, CHIP 22 (1005)
R844	1-220-878-81	s	RES, CHIP 22 (1005)
R845	1-220-878-81	s	RES, CHIP 22 (1005)
R846	1-220-878-81	s	RES, CHIP 22 (1005)
R847	1-220-878-81	s	RES, CHIP 22 (1005)
R848	1-220-878-81	s	RES, CHIP 22 (1005)
R849	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R850	1-220-878-81	s	RES, CHIP 22 (1005)
R851	1-220-878-81	s	RES, CHIP 22 (1005)
R852	1-220-878-81	s	RES, CHIP 22 (1005)
R853	1-220-878-81	s	RES, CHIP 22 (1005)
R854	1-220-878-81	s	RES, CHIP 22 (1005)
R855	1-220-878-81	s	RES, CHIP 22 (1005)
R856	1-220-878-81	s	RES, CHIP 22 (1005)
R857	1-220-878-81	s	RES, CHIP 22 (1005)
R858	1-220-878-81	s	RES, CHIP 22 (1005)
R859	1-220-878-81	s	RES, CHIP 22 (1005)
R860	1-220-878-81	s	RES, CHIP 22 (1005)
R861	1-220-878-81	s	RES, CHIP 22 (1005)
R862	1-220-878-81	s	RES, CHIP 22 (1005)
R863	1-220-878-81	s	RES, CHIP 22 (1005)
R864	1-220-878-81	s	RES, CHIP 22 (1005)
R865	1-208-911-81	s	RES, CHIP 10K (1005)
R866	1-208-911-81	s	RES, CHIP 10K (1005)
R867	1-208-911-81	s	RES, CHIP 10K (1005)
R868	1-208-911-81	s	RES, CHIP 10K (1005)
R869	1-208-911-81	s	RES, CHIP 10K (1005)
R870	1-208-911-81	s	RES, CHIP 10K (1005)
R871	1-208-911-81	s	RES, CHIP 10K (1005)
R872	1-208-911-81	s	RES, CHIP 10K (1005)
R873	1-208-911-81	s	RES, CHIP 10K (1005)
R874	1-208-911-81	s	RES, CHIP 10K (1005)
R875	1-208-911-81	s	RES, CHIP 10K (1005)
R876	1-208-911-81	s	RES, CHIP 10K (1005)
R877	1-208-911-81	s	RES, CHIP 10K (1005)
R878	1-208-911-81	s	RES, CHIP 10K (1005)
R879	1-208-911-81	s	RES, CHIP 10K (1005)
R880	1-208-887-81	s	RES, CHIP 1.0K (1005)
R881	1-208-887-81	s	RES, CHIP 1.0K (1005)
R882	1-208-887-81	s	RES, CHIP 1.0K (1005)
R883	1-208-887-81	s	RES, CHIP 1.0K (1005)
R884	1-208-887-81	s	RES, CHIP 1.0K (1005)
R885	1-208-887-81	s	RES, CHIP 1.0K (1005)
R886	1-208-887-81	s	RES, CHIP 1.0K (1005)
R887	1-208-911-81	s	RES, CHIP 10K (1005)
R889	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R890	1-208-911-81	s	RES, CHIP 10K (1005)
R891	1-208-911-81	s	RES, CHIP 10K (1005)
R892	1-208-911-81	s	RES, CHIP 10K (1005)
R893	1-208-911-81	s	RES, CHIP 10K (1005)
R894	1-208-911-81	s	RES, CHIP 10K (1005)
R895	1-208-911-81	s	RES, CHIP 10K (1005)
R896	1-208-911-81	s	RES, CHIP 10K (1005)
R897	1-208-911-81	s	RES, CHIP 10K (1005)
R898	1-208-911-81	s	RES, CHIP 10K (1005)
R899	1-208-911-81	s	RES, CHIP 10K (1005)
R900	1-208-911-81	s	RES, CHIP 10K (1005)
R901	1-208-887-81	s	RES, CHIP 1.0K (1005)
R902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R903	1-208-911-81	s	RES, CHIP 10K (1005)
R904	1-208-911-81	s	RES, CHIP 10K (1005)
R906	1-208-935-81	s	RES, CHIP 100K (1005)
R907	1-208-935-81	s	RES, CHIP 100K (1005)
R908	1-208-935-81	s	RES, CHIP 100K (1005)
R909	1-208-935-81	s	RES, CHIP 100K (1005)
R910	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R911	1-220-878-81	s	RES, CHIP 22 (1005)
R912	1-220-878-81	s	RES, CHIP 22 (1005)
R913	1-220-878-81	s	RES, CHIP 22 (1005)
R914	1-220-878-81	s	RES, CHIP 22 (1005)
R915	1-220-878-81	s	RES, CHIP 22 (1005)
R916	1-220-878-81	s	RES, CHIP 22 (1005)
R917	1-220-878-81	s	RES, CHIP 22 (1005)
R918	1-208-935-81	s	RES, CHIP 100K (1005)
R919	1-208-935-81	s	RES, CHIP 100K (1005)
R920	1-208-935-81	s	RES, CHIP 100K (1005)
R921	1-208-935-81	s	RES, CHIP 100K (1005)
R922	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R923	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R924	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R925	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R926	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R927	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R928	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R929	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R930	1-208-935-81	s	RES, CHIP 100K (1005)
R931	1-208-935-81	s	RES, CHIP 100K (1005)
R932	1-208-935-81	s	RES, CHIP 100K (1005)
R933	1-208-935-81	s	RES, CHIP 100K (1005)
R934	1-220-878-81	s	RES, CHIP 22 (1005)
R935	1-220-878-81	s	RES, CHIP 22 (1005)
R936	1-220-878-81	s	RES, CHIP 22 (1005)
R937	1-220-878-81	s	RES, CHIP 22 (1005)
R938	1-220-878-81	s	RES, CHIP 22 (1005)
R939	1-220-878-81	s	RES, CHIP 22 (1005)
R940	1-220-878-81	s	RES, CHIP 22 (1005)
R941	1-220-878-81	s	RES, CHIP 22 (1005)
R942	1-220-878-81	s	RES, CHIP 22 (1005)
R943	1-220-878-81	s	RES, CHIP 22 (1005)
R944	1-220-878-81	s	RES, CHIP 22 (1005)
R945	1-220-878-81	s	RES, CHIP 22 (1005)
R946	1-220-878-81	s	RES, CHIP 22 (1005)
R947	1-220-878-81	s	RES, CHIP 22 (1005)
R948	1-220-878-81	s	RES, CHIP 22 (1005)
R949	1-220-878-81	s	RES, CHIP 22 (1005)
R950	1-220-878-81	s	RES, CHIP 22 (1005)
R951	1-220-878-81	s	RES, CHIP 22 (1005)
R952	1-220-878-81	s	RES, CHIP 22 (1005)
R953	1-220-878-81	s	RES, CHIP 22 (1005)
R954	1-208-935-81	s	RES, CHIP 100K (1005)
R955	1-208-935-81	s	RES, CHIP 100K (1005)
R981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R983	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R984	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R985	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R986	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R987	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R988	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R989	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R990	1-220-878-81	s	RES, CHIP 22 (1005)
R991	1-220-878-81	s	RES, CHIP 22 (1005)
R992	1-220-878-81	s	RES, CHIP 22 (1005)
R993	1-220-878-81	s	RES, CHIP 22 (1005)
R994	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R995	1-220-878-81	s	RES, CHIP 22 (1005)
R996	1-220-878-81	s	RES, CHIP 22 (1005)
R997	1-220-878-81	s	RES, CHIP 22 (1005)
R998	1-220-878-81	s	RES, CHIP 22 (1005)
R999	1-220-878-81	s	RES, CHIP 22 (1005)
R1000	1-220-878-81	s	RES, CHIP 22 (1005)
R1001	1-220-878-81	s	RES, CHIP 22 (1005)
R1002	1-220-878-81	s	RES, CHIP 22 (1005)
R1003	1-220-878-81	s	RES, CHIP 22 (1005)
R1004	1-220-878-81	s	RES, CHIP 22 (1005)
R1005	1-220-878-81	s	RES, CHIP 22 (1005)
R1006	1-220-878-81	s	RES, CHIP 22 (1005)
R1007	1-220-878-81	s	RES, CHIP 22 (1005)
R1008	1-220-878-81	s	RES, CHIP 22 (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1051	1-220-878-81	s	RES, CHIP 22 (1005)
R1052	1-220-878-81	s	RES, CHIP 22 (1005)
R1053	1-220-878-81	s	RES, CHIP 22 (1005)
R1054	1-220-878-81	s	RES, CHIP 22 (1005)
R1055	1-220-878-81	s	RES, CHIP 22 (1005)
R1056	1-220-878-81	s	RES, CHIP 22 (1005)
R1057	1-220-878-81	s	RES, CHIP 22 (1005)
R1058	1-220-878-81	s	RES, CHIP 22 (1005)
R1059	1-220-878-81	s	RES, CHIP 22 (1005)
R1060	1-220-878-81	s	RES, CHIP 22 (1005)
R1061	1-220-878-81	s	RES, CHIP 22 (1005)
R1062	1-220-878-81	s	RES, CHIP 22 (1005)
R1063	1-220-878-81	s	RES, CHIP 22 (1005)
R1064	1-220-878-81	s	RES, CHIP 22 (1005)
R1065	1-220-878-81	s	RES, CHIP 22 (1005)
R1066	1-220-878-81	s	RES, CHIP 22 (1005)
R1067	1-208-935-81	s	RES, CHIP 100K (1005)
R1068	1-208-935-81	s	RES, CHIP 100K (1005)
R1101	1-208-935-81	s	RES, CHIP 100K (1005)
R1103	1-208-935-81	s	RES, CHIP 100K (1005)
R1105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1201	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1202	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1203	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1204	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1205	1-208-855-81	s	RES, CHIP 47 (1005)
R1206	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1213	1-208-855-81	s	RES, CHIP 47 (1005)
R1214	1-208-855-81	s	RES, CHIP 47 (1005)
R1215	1-208-855-81	s	RES, CHIP 47 (1005)
R1216	1-208-855-81	s	RES, CHIP 47 (1005)
R1217	1-208-855-81	s	RES, CHIP 47 (1005)
R1218	1-208-855-81	s	RES, CHIP 47 (1005)
R1219	1-208-855-81	s	RES, CHIP 47 (1005)
R1220	1-208-855-81	s	RES, CHIP 47 (1005)
R1221	1-208-855-81	s	RES, CHIP 47 (1005)
R1222	1-208-855-81	s	RES, CHIP 47 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1223	1-208-855-81	s	RES, CHIP 47 (1005)
R1224	1-208-855-81	s	RES, CHIP 47 (1005)
R1225	1-208-855-81	s	RES, CHIP 47 (1005)
R1226	1-208-855-81	s	RES, CHIP 47 (1005)
R1227	1-208-855-81	s	RES, CHIP 47 (1005)
R1228	1-208-855-81	s	RES, CHIP 47 (1005)
R1230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1235	1-208-855-81	s	RES, CHIP 47 (1005)
R1236	1-208-855-81	s	RES, CHIP 47 (1005)
R1237	1-208-855-81	s	RES, CHIP 47 (1005)
R1239	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1244	1-208-855-81	s	RES, CHIP 47 (1005)
R1245	1-208-855-81	s	RES, CHIP 47 (1005)
R1247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1250	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1252	1-208-855-81	s	RES, CHIP 47 (1005)
R1253	1-208-855-81	s	RES, CHIP 47 (1005)
R1254	1-208-855-81	s	RES, CHIP 47 (1005)
R1301	1-208-863-81	s	RES, CHIP 100 (1005)
R1302	1-208-863-81	s	RES, CHIP 100 (1005)
R1401	1-208-863-81	s	RES, CHIP 100 (1005)
R1402	1-208-863-81	s	RES, CHIP 100 (1005)
R1403	1-208-919-81	s	RES, CHIP 22K (1005)
R1404	1-208-919-81	s	RES, CHIP 22K (1005)
R1405	1-208-855-81	s	RES, CHIP 47 (1005)
R1406	1-208-855-81	s	RES, CHIP 47 (1005)
R1407	1-208-855-81	s	RES, CHIP 47 (1005)
R1408	1-208-855-81	s	RES, CHIP 47 (1005)
R1409	1-208-919-81	s	RES, CHIP 22K (1005)
R1410	1-208-919-81	s	RES, CHIP 22K (1005)
R1411	1-208-855-81	s	RES, CHIP 47 (1005)
R1412	1-208-855-81	s	RES, CHIP 47 (1005)
R1413	1-208-855-81	s	RES, CHIP 47 (1005)
R1414	1-208-855-81	s	RES, CHIP 47 (1005)
R1415	1-208-919-81	s	RES, CHIP 22K (1005)
R1416	1-208-919-81	s	RES, CHIP 22K (1005)
R1417	1-208-855-81	s	RES, CHIP 47 (1005)
R1418	1-208-855-81	s	RES, CHIP 47 (1005)
R1419	1-208-855-81	s	RES, CHIP 47 (1005)
R1420	1-208-855-81	s	RES, CHIP 47 (1005)
R1421	1-208-919-81	s	RES, CHIP 22K (1005)
R1422	1-208-919-81	s	RES, CHIP 22K (1005)
R1423	1-208-855-81	s	RES, CHIP 47 (1005)
R1424	1-208-855-81	s	RES, CHIP 47 (1005)
R1425	1-208-855-81	s	RES, CHIP 47 (1005)
R1426	1-208-855-81	s	RES, CHIP 47 (1005)
R1427	1-220-878-81	s	RES, CHIP 22 (1005)
R1428	1-220-878-81	s	RES, CHIP 22 (1005)
R1429	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1430	1-220-878-81	s	RES, CHIP 22 (1005)
R1431	1-220-878-81	s	RES, CHIP 22 (1005)
R1432	1-220-878-81	s	RES, CHIP 22 (1005)
R1433	1-220-878-81	s	RES, CHIP 22 (1005)
R1434	1-220-878-81	s	RES, CHIP 22 (1005)
R1435	1-220-878-81	s	RES, CHIP 22 (1005)
R1436	1-220-878-81	s	RES, CHIP 22 (1005)
R1437	1-220-878-81	s	RES, CHIP 22 (1005)
R1438	1-220-878-81	s	RES, CHIP 22 (1005)
R1439	1-220-878-81	s	RES, CHIP 22 (1005)
R1440	1-220-878-81	s	RES, CHIP 22 (1005)
R1441	1-220-878-81	s	RES, CHIP 22 (1005)
R1442	1-220-878-81	s	RES, CHIP 22 (1005)
R1443	1-208-875-81	s	RES, CHIP 330 (1005)
R1444	1-208-875-81	s	RES, CHIP 330 (1005)
R1445	1-208-875-81	s	RES, CHIP 330 (1005)
R1446	1-208-875-81	s	RES, CHIP 330 (1005)
R1447	1-208-875-81	s	RES, CHIP 330 (1005)
R1448	1-208-875-81	s	RES, CHIP 330 (1005)
R1449	1-208-875-81	s	RES, CHIP 330 (1005)
R1450	1-208-875-81	s	RES, CHIP 330 (1005)
R1451	1-208-875-81	s	RES, CHIP 330 (1005)
R1452	1-208-875-81	s	RES, CHIP 330 (1005)
R1453	1-208-875-81	s	RES, CHIP 330 (1005)
R1454	1-208-875-81	s	RES, CHIP 330 (1005)
R1455	1-208-875-81	s	RES, CHIP 330 (1005)
R1456	1-208-875-81	s	RES, CHIP 330 (1005)
R1457	1-208-875-81	s	RES, CHIP 330 (1005)
R1458	1-208-875-81	s	RES, CHIP 330 (1005)
R1500	1-208-855-81	s	RES, CHIP 47 (1005)
R1501	1-208-855-81	s	RES, CHIP 47 (1005)
R1502	1-208-855-81	s	RES, CHIP 47 (1005)
R1503	1-208-855-81	s	RES, CHIP 47 (1005)
R1504	1-208-855-81	s	RES, CHIP 47 (1005)
R1505	1-208-855-81	s	RES, CHIP 47 (1005)
R1506	1-220-878-81	s	RES, CHIP 22 (1005)
R1507	1-220-878-81	s	RES, CHIP 22 (1005)
R1508	1-220-878-81	s	RES, CHIP 22 (1005)
R1509	1-220-878-81	s	RES, CHIP 22 (1005)
R1510	1-208-855-81	s	RES, CHIP 47 (1005)
R1511	1-208-855-81	s	RES, CHIP 47 (1005)
R1512	1-208-863-81	s	RES, CHIP 100 (1005)
R1513	1-208-863-81	s	RES, CHIP 100 (1005)
R1514	1-208-855-81	s	RES, CHIP 47 (1005)
R1515	1-208-855-81	s	RES, CHIP 47 (1005)
R1516	1-208-863-81	s	RES, CHIP 100 (1005)
R1517	1-208-863-81	s	RES, CHIP 100 (1005)
R1518	1-208-863-81	s	RES, CHIP 100 (1005)
R1519	1-208-863-81	s	RES, CHIP 100 (1005)
R1520	1-208-863-81	s	RES, CHIP 100 (1005)
R1521	1-208-863-81	s	RES, CHIP 100 (1005)
R1522	1-208-863-81	s	RES, CHIP 100 (1005)
R1523	1-208-863-81	s	RES, CHIP 100 (1005)
R1524	1-208-863-81	s	RES, CHIP 100 (1005)
R1525	1-208-863-81	s	RES, CHIP 100 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1528	1-208-863-81	s	RES, CHIP 100 (1005)
R1529	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1530	1-208-863-81	s	RES, CHIP 100 (1005)
R1531	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-208-863-81	s	RES, CHIP 100 (1005)
R1533	1-208-863-81	s	RES, CHIP 100 (1005)
R1621	1-220-878-81	s	RES, CHIP 22 (1005)
R1622	1-220-878-81	s	RES, CHIP 22 (1005)
R1623	1-220-878-81	s	RES, CHIP 22 (1005)
R1624	1-220-878-81	s	RES, CHIP 22 (1005)
R1625	1-220-878-81	s	RES, CHIP 22 (1005)
R1626	1-220-878-81	s	RES, CHIP 22 (1005)
R1627	1-208-935-81	s	RES, CHIP 100K (1005)
R1628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1633	1-208-935-81	s	RES, CHIP 100K (1005)
R1634	1-208-935-81	s	RES, CHIP 100K (1005)
R1636	1-220-878-81	s	RES, CHIP 22 (1005)
R1637	1-220-878-81	s	RES, CHIP 22 (1005)
R1638	1-220-878-81	s	RES, CHIP 22 (1005)
R1639	1-220-878-81	s	RES, CHIP 22 (1005)
R1640	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1642	1-220-878-81	s	RES, CHIP 22 (1005)
R1643	1-220-878-81	s	RES, CHIP 22 (1005)
R1644	1-220-878-81	s	RES, CHIP 22 (1005)
R1646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1648	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1649	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1650	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1651	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1652	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1653	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1655	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1656	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1659	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1660	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1663	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1666	1-220-878-81	s	RES, CHIP 22 (1005)
R1700	1-208-855-81	s	RES, CHIP 47 (1005)
R1701	1-208-855-81	s	RES, CHIP 47 (1005)
R1702	1-208-855-81	s	RES, CHIP 47 (1005)
R1703	1-208-855-81	s	RES, CHIP 47 (1005)
R1704	1-208-855-81	s	RES, CHIP 47 (1005)
R1705	1-208-855-81	s	RES, CHIP 47 (1005)
R1706	1-220-878-81	s	RES, CHIP 22 (1005)
R1707	1-220-878-81	s	RES, CHIP 22 (1005)
R1708	1-220-878-81	s	RES, CHIP 22 (1005)
R1709	1-220-878-81	s	RES, CHIP 22 (1005)
R1710	1-208-855-81	s	RES, CHIP 47 (1005)
R1711	1-208-855-81	s	RES, CHIP 47 (1005)
R1712	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1713	1-208-863-81	s	RES, CHIP 100 (1005)
R1714	1-208-855-81	s	RES, CHIP 47 (1005)
R1715	1-208-855-81	s	RES, CHIP 47 (1005)
R1716	1-208-863-81	s	RES, CHIP 100 (1005)
R1717	1-208-863-81	s	RES, CHIP 100 (1005)
R1718	1-208-863-81	s	RES, CHIP 100 (1005)
R1719	1-208-863-81	s	RES, CHIP 100 (1005)
R1720	1-208-863-81	s	RES, CHIP 100 (1005)
R1721	1-208-863-81	s	RES, CHIP 100 (1005)
R1722	1-208-863-81	s	RES, CHIP 100 (1005)
R1723	1-208-863-81	s	RES, CHIP 100 (1005)
R1724	1-208-863-81	s	RES, CHIP 100 (1005)
R1725	1-208-863-81	s	RES, CHIP 100 (1005)
R1726	1-208-863-81	s	RES, CHIP 100 (1005)
R1727	1-208-863-81	s	RES, CHIP 100 (1005)
R1728	1-208-863-81	s	RES, CHIP 100 (1005)
R1729	1-208-863-81	s	RES, CHIP 100 (1005)
R1730	1-208-863-81	s	RES, CHIP 100 (1005)
R1731	1-208-863-81	s	RES, CHIP 100 (1005)
R1732	1-208-863-81	s	RES, CHIP 100 (1005)
R1733	1-208-863-81	s	RES, CHIP 100 (1005)
R1821	1-220-878-81	s	RES, CHIP 22 (1005)
R1822	1-220-878-81	s	RES, CHIP 22 (1005)
R1823	1-220-878-81	s	RES, CHIP 22 (1005)
R1824	1-220-878-81	s	RES, CHIP 22 (1005)
R1825	1-220-878-81	s	RES, CHIP 22 (1005)
R1826	1-220-878-81	s	RES, CHIP 22 (1005)
R1827	1-208-935-81	s	RES, CHIP 100K (1005)
R1828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1833	1-208-935-81	s	RES, CHIP 100K (1005)
R1834	1-208-935-81	s	RES, CHIP 100K (1005)
R1836	1-220-878-81	s	RES, CHIP 22 (1005)
R1837	1-220-878-81	s	RES, CHIP 22 (1005)
R1838	1-220-878-81	s	RES, CHIP 22 (1005)
R1839	1-220-878-81	s	RES, CHIP 22 (1005)
R1840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1841	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1842	1-220-878-81	s	RES, CHIP 22 (1005)
R1843	1-220-878-81	s	RES, CHIP 22 (1005)
R1844	1-220-878-81	s	RES, CHIP 22 (1005)
R1846	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1848	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1849	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1850	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1851	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1852	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1853	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1854	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1855	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1856	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1857	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1858	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1859	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1860	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1861	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1862	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1863	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1864	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1865	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1866	1-220-878-81	s	RES, CHIP 22 (1005)
R1900	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-855-81	s	RES, CHIP 47 (1005)
R1902	1-208-855-81	s	RES, CHIP 47 (1005)
R1903	1-208-855-81	s	RES, CHIP 47 (1005)
R1904	1-208-855-81	s	RES, CHIP 47 (1005)
R1905	1-208-855-81	s	RES, CHIP 47 (1005)
R1906	1-220-878-81	s	RES, CHIP 22 (1005)
R1907	1-220-878-81	s	RES, CHIP 22 (1005)
R1908	1-220-878-81	s	RES, CHIP 22 (1005)
R1909	1-220-878-81	s	RES, CHIP 22 (1005)
R1910	1-208-855-81	s	RES, CHIP 47 (1005)
R1911	1-208-855-81	s	RES, CHIP 47 (1005)
R1912	1-208-863-81	s	RES, CHIP 100 (1005)
R1913	1-208-863-81	s	RES, CHIP 100 (1005)
R1914	1-208-855-81	s	RES, CHIP 47 (1005)
R1915	1-208-855-81	s	RES, CHIP 47 (1005)
R1916	1-208-863-81	s	RES, CHIP 100 (1005)
R1917	1-208-863-81	s	RES, CHIP 100 (1005)
R1918	1-208-863-81	s	RES, CHIP 100 (1005)
R1919	1-208-863-81	s	RES, CHIP 100 (1005)
R1920	1-208-863-81	s	RES, CHIP 100 (1005)
R1921	1-208-863-81	s	RES, CHIP 100 (1005)
R1922	1-208-863-81	s	RES, CHIP 100 (1005)
R1923	1-208-863-81	s	RES, CHIP 100 (1005)
R1924	1-208-863-81	s	RES, CHIP 100 (1005)
R1925	1-208-863-81	s	RES, CHIP 100 (1005)
R1926	1-208-863-81	s	RES, CHIP 100 (1005)
R1927	1-208-863-81	s	RES, CHIP 100 (1005)
R1928	1-208-863-81	s	RES, CHIP 100 (1005)
R1929	1-208-863-81	s	RES, CHIP 100 (1005)
R1930	1-208-863-81	s	RES, CHIP 100 (1005)
R1931	1-208-863-81	s	RES, CHIP 100 (1005)
R1932	1-208-863-81	s	RES, CHIP 100 (1005)
R1933	1-208-863-81	s	RES, CHIP 100 (1005)
R2021	1-220-878-81	s	RES, CHIP 22 (1005)
R2022	1-220-878-81	s	RES, CHIP 22 (1005)
R2023	1-220-878-81	s	RES, CHIP 22 (1005)
R2024	1-220-878-81	s	RES, CHIP 22 (1005)
R2025	1-220-878-81	s	RES, CHIP 22 (1005)
R2026	1-220-878-81	s	RES, CHIP 22 (1005)
R2027	1-208-935-81	s	RES, CHIP 100K (1005)
R2028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-208-935-81	s	RES, CHIP 100K (1005)
R2034	1-208-935-81	s	RES, CHIP 100K (1005)
R2036	1-220-878-81	s	RES, CHIP 22 (1005)
R2037	1-220-878-81	s	RES, CHIP 22 (1005)
R2038	1-220-878-81	s	RES, CHIP 22 (1005)
R2039	1-220-878-81	s	RES, CHIP 22 (1005)
R2040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2042	1-220-878-81	s	RES, CHIP 22 (1005)
R2043	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2044	1-220-878-81	s	RES, CHIP 22 (1005)
R2046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2066	1-220-878-81	s	RES, CHIP 22 (1005)
R2100	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-220-878-81	s	RES, CHIP 22 (1005)
R2109	1-220-878-81	s	RES, CHIP 22 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-863-81	s	RES, CHIP 100 (1005)
R2113	1-208-863-81	s	RES, CHIP 100 (1005)
R2114	1-208-855-81	s	RES, CHIP 47 (1005)
R2115	1-208-855-81	s	RES, CHIP 47 (1005)
R2116	1-208-863-81	s	RES, CHIP 100 (1005)
R2117	1-208-863-81	s	RES, CHIP 100 (1005)
R2118	1-208-863-81	s	RES, CHIP 100 (1005)
R2119	1-208-863-81	s	RES, CHIP 100 (1005)
R2120	1-208-863-81	s	RES, CHIP 100 (1005)
R2121	1-208-863-81	s	RES, CHIP 100 (1005)
R2122	1-208-863-81	s	RES, CHIP 100 (1005)
R2123	1-208-863-81	s	RES, CHIP 100 (1005)
R2124	1-208-863-81	s	RES, CHIP 100 (1005)
R2125	1-208-863-81	s	RES, CHIP 100 (1005)
R2126	1-208-863-81	s	RES, CHIP 100 (1005)
R2127	1-208-863-81	s	RES, CHIP 100 (1005)
R2128	1-208-863-81	s	RES, CHIP 100 (1005)
R2129	1-208-863-81	s	RES, CHIP 100 (1005)
R2130	1-208-863-81	s	RES, CHIP 100 (1005)
R2131	1-208-863-81	s	RES, CHIP 100 (1005)
R2132	1-208-863-81	s	RES, CHIP 100 (1005)
R2133	1-208-863-81	s	RES, CHIP 100 (1005)
R2221	1-220-878-81	s	RES, CHIP 22 (1005)
R2222	1-220-878-81	s	RES, CHIP 22 (1005)
R2223	1-220-878-81	s	RES, CHIP 22 (1005)
R2224	1-220-878-81	s	RES, CHIP 22 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2225	1-220-878-81	s	RES, CHIP 22 (1005)
R2226	1-220-878-81	s	RES, CHIP 22 (1005)
R2227	1-208-935-81	s	RES, CHIP 100K (1005)
R2228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2232	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2233	1-208-935-81	s	RES, CHIP 100K (1005)
R2234	1-208-935-81	s	RES, CHIP 100K (1005)
R2236	1-220-878-81	s	RES, CHIP 22 (1005)
R2237	1-220-878-81	s	RES, CHIP 22 (1005)
R2238	1-220-878-81	s	RES, CHIP 22 (1005)
R2239	1-220-878-81	s	RES, CHIP 22 (1005)
R2240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2242	1-220-878-81	s	RES, CHIP 22 (1005)
R2243	1-220-878-81	s	RES, CHIP 22 (1005)
R2244	1-220-878-81	s	RES, CHIP 22 (1005)
R2246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2250	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2253	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2254	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2255	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2256	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2257	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2259	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2263	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2266	1-220-878-81	s	RES, CHIP 22 (1005)
R2300	1-208-855-81	s	RES, CHIP 47 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2307	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-220-878-81	s	RES, CHIP 22 (1005)
R2309	1-220-878-81	s	RES, CHIP 22 (1005)
R2310	1-208-855-81	s	RES, CHIP 47 (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-863-81	s	RES, CHIP 100 (1005)
R2313	1-208-863-81	s	RES, CHIP 100 (1005)
R2314	1-208-855-81	s	RES, CHIP 47 (1005)
R2315	1-208-855-81	s	RES, CHIP 47 (1005)
R2316	1-208-863-81	s	RES, CHIP 100 (1005)
R2317	1-208-863-81	s	RES, CHIP 100 (1005)
R2318	1-208-863-81	s	RES, CHIP 100 (1005)
R2319	1-208-863-81	s	RES, CHIP 100 (1005)
R2320	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2321	1-208-863-81	s	RES, CHIP 100 (1005)
R2322	1-208-863-81	s	RES, CHIP 100 (1005)
R2323	1-208-863-81	s	RES, CHIP 100 (1005)
R2324	1-208-863-81	s	RES, CHIP 100 (1005)
R2325	1-208-863-81	s	RES, CHIP 100 (1005)
R2326	1-208-863-81	s	RES, CHIP 100 (1005)
R2327	1-208-863-81	s	RES, CHIP 100 (1005)
R2328	1-208-863-81	s	RES, CHIP 100 (1005)
R2329	1-208-863-81	s	RES, CHIP 100 (1005)
R2330	1-208-863-81	s	RES, CHIP 100 (1005)
R2331	1-208-863-81	s	RES, CHIP 100 (1005)
R2332	1-208-863-81	s	RES, CHIP 100 (1005)
R2333	1-208-863-81	s	RES, CHIP 100 (1005)
R2421	1-220-878-81	s	RES, CHIP 22 (1005)
R2422	1-220-878-81	s	RES, CHIP 22 (1005)
R2423	1-220-878-81	s	RES, CHIP 22 (1005)
R2424	1-220-878-81	s	RES, CHIP 22 (1005)
R2425	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-220-878-81	s	RES, CHIP 22 (1005)
R2427	1-208-935-81	s	RES, CHIP 100K (1005)
R2428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2433	1-208-935-81	s	RES, CHIP 100K (1005)
R2434	1-208-935-81	s	RES, CHIP 100K (1005)
R2436	1-220-878-81	s	RES, CHIP 22 (1005)
R2437	1-220-878-81	s	RES, CHIP 22 (1005)
R2438	1-220-878-81	s	RES, CHIP 22 (1005)
R2439	1-220-878-81	s	RES, CHIP 22 (1005)
R2440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2442	1-220-878-81	s	RES, CHIP 22 (1005)
R2443	1-220-878-81	s	RES, CHIP 22 (1005)
R2444	1-220-878-81	s	RES, CHIP 22 (1005)
R2446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2449	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2457	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2466	1-220-878-81	s	RES, CHIP 22 (1005)
R2500	1-208-855-81	s	RES, CHIP 47 (1005)
R2501	1-208-855-81	s	RES, CHIP 47 (1005)
R2502	1-208-855-81	s	RES, CHIP 47 (1005)
R2503	1-208-855-81	s	RES, CHIP 47 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2504	1-208-855-81	s	RES, CHIP 47 (1005)
R2505	1-208-855-81	s	RES, CHIP 47 (1005)
R2506	1-220-878-81	s	RES, CHIP 22 (1005)
R2507	1-220-878-81	s	RES, CHIP 22 (1005)
R2508	1-220-878-81	s	RES, CHIP 22 (1005)
R2509	1-220-878-81	s	RES, CHIP 22 (1005)
R2510	1-208-855-81	s	RES, CHIP 47 (1005)
R2511	1-208-855-81	s	RES, CHIP 47 (1005)
R2512	1-208-863-81	s	RES, CHIP 100 (1005)
R2513	1-208-863-81	s	RES, CHIP 100 (1005)
R2514	1-208-855-81	s	RES, CHIP 47 (1005)
R2515	1-208-855-81	s	RES, CHIP 47 (1005)
R2516	1-208-863-81	s	RES, CHIP 100 (1005)
R2517	1-208-863-81	s	RES, CHIP 100 (1005)
R2518	1-208-863-81	s	RES, CHIP 100 (1005)
R2519	1-208-863-81	s	RES, CHIP 100 (1005)
R2520	1-208-863-81	s	RES, CHIP 100 (1005)
R2521	1-208-863-81	s	RES, CHIP 100 (1005)
R2522	1-208-863-81	s	RES, CHIP 100 (1005)
R2523	1-208-863-81	s	RES, CHIP 100 (1005)
R2524	1-208-863-81	s	RES, CHIP 100 (1005)
R2525	1-208-863-81	s	RES, CHIP 100 (1005)
R2526	1-208-863-81	s	RES, CHIP 100 (1005)
R2527	1-208-863-81	s	RES, CHIP 100 (1005)
R2528	1-208-863-81	s	RES, CHIP 100 (1005)
R2529	1-208-863-81	s	RES, CHIP 100 (1005)
R2530	1-208-863-81	s	RES, CHIP 100 (1005)
R2531	1-208-863-81	s	RES, CHIP 100 (1005)
R2532	1-208-863-81	s	RES, CHIP 100 (1005)
R2533	1-208-863-81	s	RES, CHIP 100 (1005)
R2621	1-220-878-81	s	RES, CHIP 22 (1005)
R2622	1-220-878-81	s	RES, CHIP 22 (1005)
R2623	1-220-878-81	s	RES, CHIP 22 (1005)
R2624	1-220-878-81	s	RES, CHIP 22 (1005)
R2625	1-220-878-81	s	RES, CHIP 22 (1005)
R2626	1-220-878-81	s	RES, CHIP 22 (1005)
R2627	1-208-935-81	s	RES, CHIP 100K (1005)
R2628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2631	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2632	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2633	1-208-935-81	s	RES, CHIP 100K (1005)
R2634	1-208-935-81	s	RES, CHIP 100K (1005)
R2636	1-220-878-81	s	RES, CHIP 22 (1005)
R2637	1-220-878-81	s	RES, CHIP 22 (1005)
R2638	1-220-878-81	s	RES, CHIP 22 (1005)
R2639	1-220-878-81	s	RES, CHIP 22 (1005)
R2640	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2642	1-220-878-81	s	RES, CHIP 22 (1005)
R2643	1-220-878-81	s	RES, CHIP 22 (1005)
R2644	1-220-878-81	s	RES, CHIP 22 (1005)
R2646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2648	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2649	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2650	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2651	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2652	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2653	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2655	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2656	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2659	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2660	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2663	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2666	1-220-878-81	s	RES, CHIP 22 (1005)
R2700	1-208-855-81	s	RES, CHIP 47 (1005)
R2701	1-208-855-81	s	RES, CHIP 47 (1005)
R2702	1-208-855-81	s	RES, CHIP 47 (1005)
R2703	1-208-855-81	s	RES, CHIP 47 (1005)
R2704	1-208-855-81	s	RES, CHIP 47 (1005)
R2705	1-208-855-81	s	RES, CHIP 47 (1005)
R2706	1-220-878-81	s	RES, CHIP 22 (1005)
R2707	1-220-878-81	s	RES, CHIP 22 (1005)
R2708	1-220-878-81	s	RES, CHIP 22 (1005)
R2709	1-220-878-81	s	RES, CHIP 22 (1005)
R2710	1-208-855-81	s	RES, CHIP 47 (1005)
R2711	1-208-855-81	s	RES, CHIP 47 (1005)
R2712	1-208-863-81	s	RES, CHIP 100 (1005)
R2713	1-208-863-81	s	RES, CHIP 100 (1005)
R2714	1-208-855-81	s	RES, CHIP 47 (1005)
R2715	1-208-855-81	s	RES, CHIP 47 (1005)
R2716	1-208-863-81	s	RES, CHIP 100 (1005)
R2717	1-208-863-81	s	RES, CHIP 100 (1005)
R2718	1-208-863-81	s	RES, CHIP 100 (1005)
R2719	1-208-863-81	s	RES, CHIP 100 (1005)
R2720	1-208-863-81	s	RES, CHIP 100 (1005)
R2721	1-208-863-81	s	RES, CHIP 100 (1005)
R2722	1-208-863-81	s	RES, CHIP 100 (1005)
R2723	1-208-863-81	s	RES, CHIP 100 (1005)
R2724	1-208-863-81	s	RES, CHIP 100 (1005)
R2725	1-208-863-81	s	RES, CHIP 100 (1005)
R2726	1-208-863-81	s	RES, CHIP 100 (1005)
R2727	1-208-863-81	s	RES, CHIP 100 (1005)
R2728	1-208-863-81	s	RES, CHIP 100 (1005)
R2729	1-208-863-81	s	RES, CHIP 100 (1005)
R2730	1-208-863-81	s	RES, CHIP 100 (1005)
R2731	1-208-863-81	s	RES, CHIP 100 (1005)
R2732	1-208-863-81	s	RES, CHIP 100 (1005)
R2733	1-208-863-81	s	RES, CHIP 100 (1005)
R2821	1-220-878-81	s	RES, CHIP 22 (1005)
R2822	1-220-878-81	s	RES, CHIP 22 (1005)
R2823	1-220-878-81	s	RES, CHIP 22 (1005)
R2824	1-220-878-81	s	RES, CHIP 22 (1005)
R2825	1-220-878-81	s	RES, CHIP 22 (1005)
R2826	1-220-878-81	s	RES, CHIP 22 (1005)
R2827	1-208-935-81	s	RES, CHIP 100K (1005)
R2828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2833	1-208-935-81	s	RES, CHIP 100K (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2834	1-208-935-81	s	RES, CHIP 100K (1005)
R2836	1-220-878-81	s	RES, CHIP 22 (1005)
R2837	1-220-878-81	s	RES, CHIP 22 (1005)
R2838	1-220-878-81	s	RES, CHIP 22 (1005)
R2839	1-220-878-81	s	RES, CHIP 22 (1005)
R2840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2841	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2842	1-220-878-81	s	RES, CHIP 22 (1005)
R2843	1-220-878-81	s	RES, CHIP 22 (1005)
R2844	1-220-878-81	s	RES, CHIP 22 (1005)
R2846	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2848	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2849	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2850	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2851	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2852	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2853	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2854	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2855	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2856	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2857	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2858	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2859	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2860	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2861	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2862	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2863	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2864	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2865	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2866	1-220-878-81	s	RES, CHIP 22 (1005)
R2900	1-208-855-81	s	RES, CHIP 47 (1005)
R2901	1-208-855-81	s	RES, CHIP 47 (1005)
R2902	1-208-855-81	s	RES, CHIP 47 (1005)
R2903	1-208-855-81	s	RES, CHIP 47 (1005)
R2904	1-208-855-81	s	RES, CHIP 47 (1005)
R2905	1-208-855-81	s	RES, CHIP 47 (1005)
R2906	1-220-878-81	s	RES, CHIP 22 (1005)
R2907	1-220-878-81	s	RES, CHIP 22 (1005)
R2908	1-220-878-81	s	RES, CHIP 22 (1005)
R2909	1-220-878-81	s	RES, CHIP 22 (1005)
R2910	1-208-855-81	s	RES, CHIP 47 (1005)
R2911	1-208-855-81	s	RES, CHIP 47 (1005)
R2912	1-208-863-81	s	RES, CHIP 100 (1005)
R2913	1-208-863-81	s	RES, CHIP 100 (1005)
R2914	1-208-855-81	s	RES, CHIP 47 (1005)
R2915	1-208-855-81	s	RES, CHIP 47 (1005)
R2916	1-208-863-81	s	RES, CHIP 100 (1005)
R2917	1-208-863-81	s	RES, CHIP 100 (1005)
R2918	1-208-863-81	s	RES, CHIP 100 (1005)
R2919	1-208-863-81	s	RES, CHIP 100 (1005)
R2920	1-208-863-81	s	RES, CHIP 100 (1005)
R2921	1-208-863-81	s	RES, CHIP 100 (1005)
R2922	1-208-863-81	s	RES, CHIP 100 (1005)
R2923	1-208-863-81	s	RES, CHIP 100 (1005)
R2924	1-208-863-81	s	RES, CHIP 100 (1005)
R2925	1-208-863-81	s	RES, CHIP 100 (1005)
R2926	1-208-863-81	s	RES, CHIP 100 (1005)
R2927	1-208-863-81	s	RES, CHIP 100 (1005)
R2928	1-208-863-81	s	RES, CHIP 100 (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2929	1-208-863-81	s	RES, CHIP 100 (1005)
R2930	1-208-863-81	s	RES, CHIP 100 (1005)
R2931	1-208-863-81	s	RES, CHIP 100 (1005)
R2932	1-208-863-81	s	RES, CHIP 100 (1005)
R2933	1-208-863-81	s	RES, CHIP 100 (1005)
R3021	1-220-878-81	s	RES, CHIP 22 (1005)
R3022	1-220-878-81	s	RES, CHIP 22 (1005)
R3023	1-220-878-81	s	RES, CHIP 22 (1005)
R3024	1-220-878-81	s	RES, CHIP 22 (1005)
R3025	1-220-878-81	s	RES, CHIP 22 (1005)
R3026	1-220-878-81	s	RES, CHIP 22 (1005)
R3027	1-208-935-81	s	RES, CHIP 100K (1005)
R3028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3033	1-208-935-81	s	RES, CHIP 100K (1005)
R3034	1-208-935-81	s	RES, CHIP 100K (1005)
R3036	1-220-878-81	s	RES, CHIP 22 (1005)
R3037	1-220-878-81	s	RES, CHIP 22 (1005)
R3038	1-220-878-81	s	RES, CHIP 22 (1005)
R3039	1-220-878-81	s	RES, CHIP 22 (1005)
R3040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3042	1-220-878-81	s	RES, CHIP 22 (1005)
R3043	1-220-878-81	s	RES, CHIP 22 (1005)
R3044	1-220-878-81	s	RES, CHIP 22 (1005)
R3046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3066	1-220-878-81	s	RES, CHIP 22 (1005)
R3101	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3102	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3103	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3104	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3113	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3114	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3115	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3116	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3517	1-208-935-81	s	RES, CHIP 100K (1005)
R4001	1-208-911-81	s	RES, CHIP 10K (1005)
R4002	1-208-911-81	s	RES, CHIP 10K (1005)
R4003	1-208-911-81	s	RES, CHIP 10K (1005)
R4004	1-208-911-81	s	RES, CHIP 10K (1005)
R4005	1-208-911-81	s	RES, CHIP 10K (1005)
R4006	1-208-911-81	s	RES, CHIP 10K (1005)
R4501	1-208-911-81	s	RES, CHIP 10K (1005)
R4502	1-208-911-81	s	RES, CHIP 10K (1005)
R4503	1-208-911-81	s	RES, CHIP 10K (1005)
R4504	1-208-911-81	s	RES, CHIP 10K (1005)
R4505	1-208-911-81	s	RES, CHIP 10K (1005)
R4506	1-208-911-81	s	RES, CHIP 10K (1005)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB903	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB904	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB905	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB912	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB913	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB914	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB915	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB916	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB917	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB918	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB919	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB920	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB921	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB922	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB923	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1001	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1002	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1003	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1004	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1005	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1006	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1007	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1008	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1013	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1014	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1015	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1016	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1512	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1515	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1516	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1621	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1622	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1623	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1624	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1625	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1626	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1627	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1628	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1700	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1702	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1703	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1704	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1705	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1706	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1707	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1709	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1710	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1711	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1712	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1713	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1714	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1715	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1716	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1821	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1822	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1823	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1824	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1825	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1826	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1827	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1828	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1900	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1901	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1908	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1911	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1913	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1914	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1915	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1916	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2021	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2022	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2023	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2024	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2025	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2026	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2027	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2028	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2114	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2115	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2116	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2223	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2224	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2225	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2228	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2300	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2306	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2307	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2308	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2309	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2310	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2311	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2312	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2313	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2314	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2315	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2316	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2421	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2422	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2423	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2424	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2425	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2426	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2427	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2428	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2512	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2514	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2515	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2516	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2621	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2622	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2623	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2624	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2625	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2626	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2627	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2628	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2700	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2702	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2703	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2704	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2705	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2706	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2707	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2708	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2709	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2710	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2711	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2712	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2713	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2714	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2715	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2716	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2821	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2822	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2823	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2824	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2825	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2826	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2827	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2828	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2900	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2901	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(FC-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2907	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2908	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2909	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2910	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2911	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2912	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2913	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2914	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2915	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2916	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3021	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3022	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3023	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3024	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3025	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3026	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3027	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3028	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3501	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3502	1-234-381-21	s	RES, NETWORK 100K (1005X4)
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP702	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP705	1-535-877-22	s	CHIP, CHECKER
TP706	1-535-877-22	s	CHIP, CHECKER
TP707	1-535-877-22	s	CHIP, CHECKER
TP708	1-535-877-22	s	CHIP, CHECKER
TP709	1-535-877-22	s	CHIP, CHECKER
TP710	1-535-877-22	s	CHIP, CHECKER
TP711	1-535-877-22	s	CHIP, CHECKER
TP712	1-535-877-22	s	CHIP, CHECKER
X501	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X502	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X503	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X601	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X602	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X603	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X701	1-795-677-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

HN-305A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C2	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C11	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C12	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C15	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C16	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C17	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
CN1	1-820-003-11	s	CONNECTOR,BOARD TO BOARD 8P
CN2	1-774-730-21	s	PIN, CONNECTOR (PC BOARD) 3P
D1	8-719-072-83	s	DIODE MBRS340T3
F1	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
IC1	8-759-646-33	s	IC MAX1627ESA+TG068
IC2	8-759-083-42	s	IC TC4W53FU(TE12R)
L1	1-419-630-21	s	COIL, CHOKE 4.7UH
L2	1-469-060-21	s	INDUCTOR
Q1	6-551-380-01	s	TRANSISTOR SI4425BDY-T1
Q2	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R2	1-208-911-81	s	RES, CHIP 10K (1005)
R3	1-208-927-81	s	RES, CHIP 47K (1005)
R4	1-208-911-81	s	RES, CHIP 10K (1005)
R5	1-208-927-81	s	RES, CHIP 47K (1005)
R6	1-208-927-81	s	RES, CHIP 47K (1005)
R7	1-208-935-81	s	RES, CHIP 100K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)

IF-937 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1558-544-A	s	MOUNTED CIRCUIT BOARD, IF-937
C1	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C2	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C4	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C5	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C6	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C7	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C8	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C9	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C10	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C11	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C12	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C13	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C14	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C15	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C16	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C17	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C18	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C19	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C20	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C21	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C22	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C23	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C24	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C25	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C26	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C27	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C28	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C29	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C30	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C31	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C32	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C33	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
D1	8-719-064-52	s	DIODE CL-191YG-CD-T
FL1	1-239-899-21	s	FILTER, CHIP EMI
IC1	6-703-624-01	s	IC UPD72874GC-YEB
IC2	6-710-018-01	s	IC CAT24C02WI-GT3
L1	1-469-294-21	s	COIL, 1394 COMMON MODE
L2	1-469-294-21	s	COIL, 1394 COMMON MODE
L3	1-469-294-21	s	COIL, 1394 COMMON MODE
R1	1-218-871-91	s	RES, CHIP 10K (1608)
R2	1-218-823-91	s	RES, CHIP 100 (1608)
R3	1-218-871-91	s	RES, CHIP 10K (1608)
R4	1-218-864-91	s	RES, CHIP 5.1K (1608)
R5	1-218-864-91	s	RES, CHIP 5.1K (1608)
R6	1-218-864-91	s	RES, CHIP 5.1K (1608)
R7	1-218-903-91	s	RES, CHIP 220K (1608)
R8	1-218-895-91	s	RES, CHIP 100K (1608)
R9	1-218-871-91	s	RES, CHIP 10K (1608)
R10	1-218-847-91	s	RES, CHIP 1.0K (1608)
R11	1-218-847-91	s	RES, CHIP 1.0K (1608)
R12	1-218-847-91	s	RES, CHIP 1.0K (1608)
R13	1-218-871-91	s	RES, CHIP 10K (1608)
R14	1-218-871-91	s	RES, CHIP 10K (1608)
R15	1-218-871-91	s	RES, CHIP 10K (1608)

(IF-937 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R16	1-218-871-91	s	RES, CHIP 10K (1608)
R17	1-218-871-91	s	RES, CHIP 10K (1608)
R18	1-218-895-91	s	RES, CHIP 100K (1608)
R19	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R20	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R21	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R22	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R23	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R24	1-211-987-91	s	RES, CHIP 56 (1608)
R25	1-211-987-91	s	RES, CHIP 56 (1608)
R26	1-211-987-91	s	RES, CHIP 56 (1608)
R27	1-211-987-91	s	RES, CHIP 56 (1608)
R28	1-211-987-91	s	RES, CHIP 56 (1608)
R29	1-211-987-91	s	RES, CHIP 56 (1608)
R30	1-211-987-91	s	RES, CHIP 56 (1608)
R31	1-211-987-91	s	RES, CHIP 56 (1608)
R32	1-211-987-91	s	RES, CHIP 56 (1608)
R33	1-211-987-91	s	RES, CHIP 56 (1608)
R34	1-211-987-91	s	RES, CHIP 56 (1608)
R35	1-211-987-91	s	RES, CHIP 56 (1608)
R36	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R37	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R38	1-211-977-91	s	RES, CHIP 22 (1608)
R39	1-218-895-91	s	RES, CHIP 100K (1608)
R40	1-218-823-91	s	RES, CHIP 100 (1608)
R41	1-218-831-91	s	RES, CHIP 220 (1608)
X1	1-795-796-11	s	VIBRATOR, CRYSTAL (24.576 MHz)

MB-1133 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1547-518-A	s	MOUNTED CIRCUIT BOARD, MB-1133
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CNF1	1-820-004-11	s	CONNECTOR,BOARD TO BOARD 8P
CNF2	1-820-004-11	s	CONNECTOR,BOARD TO BOARD 8P
IC1	6-710-018-01	s	IC CAT24C02WI-GT3
IC2	6-710-018-01	s	IC CAT24C02WI-GT3
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)

MIX-52 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1547-166-A	s	MOUNTED CIRCUIT BOARD, MIX-52
1pc	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
3pcs	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
3pcs	3-636-891-01	o	SPACER
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
1pc	3-854-851-01	s	SHEET,RADIATION
6pcs	4-143-557-01	s	SPRING, COMPRESSION
6pcs	4-143-559-01	s	PIN, PUSH
2pcs	7-626-300-54	s	SPRING PIN 3X6
3pcs	7-682-946-01	s	SCREW +PSW 3X5
C1	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C100	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C101	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C102	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C103	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C104	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C105	1-128-414-21	s	CAP, CHIP ELECT 220MF
C106	1-128-414-21	s	CAP, CHIP ELECT 220MF
C107	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C108	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C109	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C110	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C111	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C112	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C113	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C114	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C115	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C116	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C117	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C118	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C200	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C201	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C234	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C236	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C237	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C238	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C239	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C240	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C241	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C242	1-100-986-21	s	CAP, ELECT 330MF
C243	1-100-986-21	s	CAP, ELECT 330MF
C244	1-100-986-21	s	CAP, ELECT 330MF
C245	1-100-986-21	s	CAP, ELECT 330MF
C246	1-100-986-21	s	CAP, ELECT 330MF
C247	1-100-986-21	s	CAP, ELECT 330MF
C248	1-100-986-21	s	CAP, ELECT 330MF
C249	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C250	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C251	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C252	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C253	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C254	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C255	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C256	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C257	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C258	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C259	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C513	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C905	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1308	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1320	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1323	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1326	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1327	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1328	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1329	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1330	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1605	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1606	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1607	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1608	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1609	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1610	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1611	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1612	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1613	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1614	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1615	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1700	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1702	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1704	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1705	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1706	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1707	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1708	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1709	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1710	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1711	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1712	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1713	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1714	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1715	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1800	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1801	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1802	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1803	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1804	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1805	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1806	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1807	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1808	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1809	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1810	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1811	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1812	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1813	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1814	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1815	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1900	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1902	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1903	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1904	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1907	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1908	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1909	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1910	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1911	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1912	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1913	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1914	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1915	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1916	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1917	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3200	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3203	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3206	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3209	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3212	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3215	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3218	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3221	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3224	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3227	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3228	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3231	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3234	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3237	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3238	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3241	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3244	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3247	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3248	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3251	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3254	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3257	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3260	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3263	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3266	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3269	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3272	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3273	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3300	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3304	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3305	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3308	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3309	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3338	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3339	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3340	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3341	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3342	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3343	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3356	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3359	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3360	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3361	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3362	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3371	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3372	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3381	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3382	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3384	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3385	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3386	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3387	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3388	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3389	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3390	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3391	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3392	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3393	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3394	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3395	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3396	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3397	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3398	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3399	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3500	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3503	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3504	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3505	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3508	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3509	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3538	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3539	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3541	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3542	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3543	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3544	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3545	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3546	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3552	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3559	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3560	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3561	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3562	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3569	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3571	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3572	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3577	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3580	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3581	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3582	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3584	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3585	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3586	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3587	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3588	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3589	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3590	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3591	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3592	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3593	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3594	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3595	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3596	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3598	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3604	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3700	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3702	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3704	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3705	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3712	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3713	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3714	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3727	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3740	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3741	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3746	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3748	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3749	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3750	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3752	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3753	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3754	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3759	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3760	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3761	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3762	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3768	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3771	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3772	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3774	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3781	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3782	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3784	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3785	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3786	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3787	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3788	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3789	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3790	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3791	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3792	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3793	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3794	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3795	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3796	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3797	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3799	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3900	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3902	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3903	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3904	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3905	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3906	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3907	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3908	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3909	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3910	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3911	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3919	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3926	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3938	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3947	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3948	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3950	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3964	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3965	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3966	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3967	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3972	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3973	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3974	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3975	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3977	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3978	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3981	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3982	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3983	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3984	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3985	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3986	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3987	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3991	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3995	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3996	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3997	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3999	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4049	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4052	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4062	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4063	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4065	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4066	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4067	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4068	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4074	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4077	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4081	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4083	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4087	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4089	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4090	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4093	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4095	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4096	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4097	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4098	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4099	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4100	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4101	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4102	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4103	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4104	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4105	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4106	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4107	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4108	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4109	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4110	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4111	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4200	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4201	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4202	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4203	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4204	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4205	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4206	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4207	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4208	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4209	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4210	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4211	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4243	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4255	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4259	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4263	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4264	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4266	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4267	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4272	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4273	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4274	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4275	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4289	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4291	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4293	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4297	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4341	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4355	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4371	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4372	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4383	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4384	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4386	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4387	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4388	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4389	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4393	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4394	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4396	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4397	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4400	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4401	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4402	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4403	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4404	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4405	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4406	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4407	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4408	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4409	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4410	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4411	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4500	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4501	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4502	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4503	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4504	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4505	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4506	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4507	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4508	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4509	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4510	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4511	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4512	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4518	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4520	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4523	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4526	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4529	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4533	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4534	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4536	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4539	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4540	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4542	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4545	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4547	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4550	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4553	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4558	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4562	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4563	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4564	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4565	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4566	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4567	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4568	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4570	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4572	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4573	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4575	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4576	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4577	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4589	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4590	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4591	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4592	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4593	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4594	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4595	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4596	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4597	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4598	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4599	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4600	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4601	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4602	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4603	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4604	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4605	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4606	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4607	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4608	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4609	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4610	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4611	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4612	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4613	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4614	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4615	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4616	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4618	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4621	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4624	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4627	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4630	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4633	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4634	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4636	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4639	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4642	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4644	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4646	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4647	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4650	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4651	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4652	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4653	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4655	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4656	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4657	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4659	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4660	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4661	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4662	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4664	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4665	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4666	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4667	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4668	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4669	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4670	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4671	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4672	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4673	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4674	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4675	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4676	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4677	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4678	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4679	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4680	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4681	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4682	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4683	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4684	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4685	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4686	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4687	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4688	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4689	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4690	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4691	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4692	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4693	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4694	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4695	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4696	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4697	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4698	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4699	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4702	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4705	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4708	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4711	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4716	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4719	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4722	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4727	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4731	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4732	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4733	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4734	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4735	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4736	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4739	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4741	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4742	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4744	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4745	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4746	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4759	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4760	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4761	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4762	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4763	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4764	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4765	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4766	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4767	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4768	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4769	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4770	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4771	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4772	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4773	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4774	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4775	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4776	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4777	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4778	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4779	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4780	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4781	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4782	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4783	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4784	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4787	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4790	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4793	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4794	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4796	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4797	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4799	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4800	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4802	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4805	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4808	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4811	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4813	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4815	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4816	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4819	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4821	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4822	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4824	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4825	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4828	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4830	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4831	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4833	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4834	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4835	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4836	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4837	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4900	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4901	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4902	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4903	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4904	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4905	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4906	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4907	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4908	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4909	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4910	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4911	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4912	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4918	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4920	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4923	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4926	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4929	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4930	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4933	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4936	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4939	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4940	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4942	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4947	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4950	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4951	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4953	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4958	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4962	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4963	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4964	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4965	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4966	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4967	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4970	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4971	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4972	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4973	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4974	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4975	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4976	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4977	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4989	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4990	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4991	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4992	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4993	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4994	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4995	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4996	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4997	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4998	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4999	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5000	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5001	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5002	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5003	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5004	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5005	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5006	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5007	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5008	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5009	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5010	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5011	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5012	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5013	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5014	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5015	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5018	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5021	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5024	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5027	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5030	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5033	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5036	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5039	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5042	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5044	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5046	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5047	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5049	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5050	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5052	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5053	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5055	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5056	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5057	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5058	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5059	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5061	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5062	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5063	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5064	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5065	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5066	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5067	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5068	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5069	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5070	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C5071	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C5072	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C5073	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C5074	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5075	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C5076	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5077	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5078	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5079	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5080	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5081	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5086	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5087	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5088	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5089	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5092	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5093	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5094	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5095	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5096	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5097	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5098	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5099	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5102	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5105	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5108	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5111	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5116	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5127	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5131	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5133	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5134	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5135	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5136	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5139	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5141	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5142	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5144	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5145	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5146	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C5158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5159	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5160	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5161	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5162	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5163	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5164	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5165	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5166	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5167	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5168	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5169	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5170	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5171	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5172	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5173	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5174	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5175	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5176	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5177	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5178	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5179	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5181	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5183	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C5184	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5187	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5190	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5193	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5196	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5197	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5199	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5211	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5213	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5215	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5216	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5219	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5221	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5222	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5224	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5225	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5228	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5230	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5231	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5233	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5234	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5235	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C5236	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5237	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5300	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5301	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5321	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5331	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5333	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5339	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5343	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5345	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5348	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5353	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5356	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5361	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5371	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5372	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5376	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5381	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5384	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5385	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5386	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5387	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5388	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5389	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5390	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5391	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5394	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5395	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5396	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5397	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5407	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5422	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5423	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5424	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5425	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5427	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5428	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5429	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5430	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5431	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5432	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5433	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5434	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5435	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5436	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5437	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5438	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5439	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5440	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5441	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5451	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5457	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5458	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5459	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5461	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5462	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5463	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5466	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C5467	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C5468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN600	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN700	1-564-013-11	o	PIN, CONNECTOR 3P
CN701	1-564-013-11	o	PIN, CONNECTOR 3P
CN1500	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1501	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1502	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1503	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1504	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-074-31	s	DIODE CL-196YG-CD-T
D200	8-719-074-31	s	DIODE CL-196YG-CD-T
D201	8-719-074-31	s	DIODE CL-196YG-CD-T
D202	8-719-069-28	s	DIODE 1SS400TE-61

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D203	8-719-074-31	s	DIODE CL-196YG-CD-T
D204	8-719-074-31	s	DIODE CL-196YG-CD-T
D205	8-719-074-31	s	DIODE CL-196YG-CD-T
D206	8-719-074-31	s	DIODE CL-196YG-CD-T
D207	8-719-074-31	s	DIODE CL-196YG-CD-T
D208	8-719-069-28	s	DIODE 1SS400TE-61
D209	8-719-069-28	s	DIODE 1SS400TE-61
D210	8-719-069-28	s	DIODE 1SS400TE-61
D211	8-719-069-28	s	DIODE 1SS400TE-61
D500	8-719-077-09	s	DIODE CL-196HR-CD-T
D501	8-719-077-09	s	DIODE CL-196HR-CD-T
D502	8-719-074-31	s	DIODE CL-196YG-CD-T
D503	8-719-074-31	s	DIODE CL-196YG-CD-T
D504	8-719-074-31	s	DIODE CL-196YG-CD-T
D3000	8-719-074-31	s	DIODE CL-196YG-CD-T
D3001	8-719-074-31	s	DIODE CL-196YG-CD-T
D3002	8-719-074-31	s	DIODE CL-196YG-CD-T
D3003	8-719-074-31	s	DIODE CL-196YG-CD-T
D3004	8-719-074-31	s	DIODE CL-196YG-CD-T
D3005	8-719-074-31	s	DIODE CL-196YG-CD-T
D3006	8-719-074-31	s	DIODE CL-196YG-CD-T
D3007	8-719-074-31	s	DIODE CL-196YG-CD-T
D3008	8-719-074-31	s	DIODE CL-196YG-CD-T
D3009	8-719-074-31	s	DIODE CL-196YG-CD-T
D3010	8-719-074-31	s	DIODE CL-196YG-CD-T
D3011	8-719-074-31	s	DIODE CL-196YG-CD-T
D3012	8-719-074-31	s	DIODE CL-196YG-CD-T
D3013	8-719-074-31	s	DIODE CL-196YG-CD-T
D3014	8-719-074-31	s	DIODE CL-196YG-CD-T
D3015	8-719-074-31	s	DIODE CL-196YG-CD-T
D3100	8-719-074-31	s	DIODE CL-196YG-CD-T
D3101	8-719-074-31	s	DIODE CL-196YG-CD-T
D3102	8-719-074-31	s	DIODE CL-196YG-CD-T
D3103	8-719-074-31	s	DIODE CL-196YG-CD-T
D3104	8-719-074-31	s	DIODE CL-196YG-CD-T
D3105	8-719-074-31	s	DIODE CL-196YG-CD-T
D3106	8-719-074-31	s	DIODE CL-196YG-CD-T
D3107	8-719-074-31	s	DIODE CL-196YG-CD-T
D3108	8-719-074-31	s	DIODE CL-196YG-CD-T
D3109	8-719-074-31	s	DIODE CL-196YG-CD-T
D3110	8-719-074-31	s	DIODE CL-196YG-CD-T
D3111	8-719-074-31	s	DIODE CL-196YG-CD-T
D3112	8-719-074-31	s	DIODE CL-196YG-CD-T
D3113	8-719-074-31	s	DIODE CL-196YG-CD-T
D3114	8-719-074-31	s	DIODE CL-196YG-CD-T
D3115	8-719-074-31	s	DIODE CL-196YG-CD-T
DD200	1-487-092-11	s	DC-DC CONVERTER
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
DD205	1-487-092-11	s	DC-DC CONVERTER
DD206	1-487-092-11	s	DC-DC CONVERTER
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
E19	1-535-877-22	s	CHIP, CHECKER
E20	1-535-877-22	s	CHIP, CHECKER
E21	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F200	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F201	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F206	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB400	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3300	1-400-580-21	s	FERRITE, EMI (SMD)
FB3301	1-400-580-21	s	FERRITE, EMI (SMD)
FB3302	1-400-580-21	s	FERRITE, EMI (SMD)
FB3303	1-400-580-21	s	FERRITE, EMI (SMD)
FB3304	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3500	1-400-580-21	s	FERRITE, EMI (SMD)
FB3501	1-400-580-21	s	FERRITE, EMI (SMD)
FB3502	1-400-580-21	s	FERRITE, EMI (SMD)
FB3503	1-400-580-21	s	FERRITE, EMI (SMD)
FB3700	1-400-580-21	s	FERRITE, EMI (SMD)
FB3701	1-400-580-21	s	FERRITE, EMI (SMD)
FB3702	1-400-580-21	s	FERRITE, EMI (SMD)
FB3703	1-400-580-21	s	FERRITE, EMI (SMD)
FB5301	1-400-580-21	s	FERRITE, EMI (SMD)
FB5302	1-400-580-21	s	FERRITE, EMI (SMD)
FB5303	1-400-580-21	s	FERRITE, EMI (SMD)
FL1300	1-239-899-21	s	FILTER, CHIP EMI
IC100	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC104	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC105	6-708-324-01	s	IC R3112N301A-TR-FA
IC201	8-759-338-95	s	IC NJM2903V(TE2)
IC202	8-759-338-95	s	IC NJM2903V(TE2)
IC204	8-759-338-95	s	IC NJM2903V(TE2)
IC209	8-759-338-95	s	IC NJM2903V(TE2)
IC300	8-759-639-86	s	IC SN65LVDS32DR
IC301	6-709-646-01	s	IC TLC2933AIPWR
IC302	8-759-639-85	s	IC SN65LVDS31DR
IC303	8-759-388-62	s	IC NJU7062M(TE2)
IC304	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC305	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC306	8-759-592-49	s	IC TC7SZ125FU(TE85R)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC307	8-759-669-44	s	IC SN74LVC74APWR-12
IC308	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC309	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC310	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC311	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC400	6-703-875-01	s	IC CDCVF2505PWR
IC401	8-759-639-86	s	IC SN65LVDS32DR
IC500	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC700	8-759-669-42	s	IC SN74LVC138APWR-12
IC701	8-759-392-77	s	IC SN74LVC245APWR
IC702	8-759-669-41	s	IC SN74LVC125APWR-12
IC703	8-759-669-41	s	IC SN74LVC125APWR-12
IC704	8-759-392-77	s	IC SN74LVC245APWR
IC705	6-705-514-01	s	IC MAX3222IPWR
IC706	8-759-392-77	s	IC SN74LVC245APWR
IC707	8-759-392-77	s	IC SN74LVC245APWR
IC708	6-705-514-01	s	IC MAX3222IPWR
IC709	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC710	6-710-018-01	s	IC CAT24C02WI-GT3
IC800	8-759-392-81	s	IC SN74LVC16245ADGGR
IC801	8-759-392-81	s	IC SN74LVC16245ADGGR
IC802	8-759-392-81	s	IC SN74LVC16245ADGGR
IC803	8-759-392-81	s	IC SN74LVC16245ADGGR
IC900	8-759-392-81	s	IC SN74LVC16245ADGGR
IC901	8-759-392-81	s	IC SN74LVC16245ADGGR
IC902	8-759-392-81	s	IC SN74LVC16245ADGGR
IC903	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1200	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1201	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1202	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1203	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1300	6-703-624-01	s	IC UPD72874GC-YEB
IC1301	6-710-018-01	s	IC CAT24C02WI-GT3
IC1400	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1500	8-759-392-77	s	IC SN74LVC245APWR
IC1501	8-759-392-77	s	IC SN74LVC245APWR
IC1502	8-759-392-77	s	IC SN74LVC245APWR
IC3200	6-700-141-11	s	IC DS90CF386MTDX
IC3201	6-700-141-11	s	IC DS90CF386MTDX
IC3202	6-700-141-11	s	IC DS90CF386MTDX
IC3203	6-701-098-11	s	IC THC63LVDM83R-T
IC3204	6-701-098-11	s	IC THC63LVDM83R-T
IC3205	6-701-098-11	s	IC THC63LVDM83R-T
L300	1-469-561-21	s	INDUCTOR, CHIP 100UH (LB2016)
L1300	1-469-294-21	s	COIL, 1394 COMMON MODE
L1301	1-469-294-21	s	COIL, 1394 COMMON MODE
L1302	1-469-294-21	s	COIL, 1394 COMMON MODE
L3300	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3700	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L3703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3900	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3905	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3906	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3907	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4200	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4500	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4501	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4502	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4503	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4504	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4505	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4506	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4507	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4508	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4509	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4900	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4901	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4902	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4903	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4904	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4905	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4906	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4907	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4908	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4909	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L5300	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L5307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q100	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q200	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q207	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q208	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q209	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q210	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q211	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q212	8-729-929-09	s	TRANSISTOR DTC123JE-TL

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q213	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q214	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q215	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q216	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q217	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q218	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q219	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q220	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q221	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q300	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q301	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q302	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4	1-208-903-81	s	RES, CHIP 4.7K (1005)
R5	1-208-887-81	s	RES, CHIP 1.0K (1005)
R50	1-220-878-81	s	RES, CHIP 22 (1005)
R51	1-220-878-81	s	RES, CHIP 22 (1005)
R52	1-220-878-81	s	RES, CHIP 22 (1005)
R53	1-220-878-81	s	RES, CHIP 22 (1005)
R54	1-220-878-81	s	RES, CHIP 22 (1005)
R55	1-220-878-81	s	RES, CHIP 22 (1005)
R56	1-220-878-81	s	RES, CHIP 22 (1005)
R57	1-220-878-81	s	RES, CHIP 22 (1005)
R58	1-208-935-81	s	RES, CHIP 100K (1005)
R59	1-208-935-81	s	RES, CHIP 100K (1005)
R60	1-208-935-81	s	RES, CHIP 100K (1005)
R61	1-208-935-81	s	RES, CHIP 100K (1005)
R62	1-208-935-81	s	RES, CHIP 100K (1005)
R63	1-208-935-81	s	RES, CHIP 100K (1005)
R64	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R65	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R66	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R67	1-208-935-81	s	RES, CHIP 100K (1005)
R68	1-208-935-81	s	RES, CHIP 100K (1005)
R69	1-220-878-81	s	RES, CHIP 22 (1005)
R70	1-220-878-81	s	RES, CHIP 22 (1005)
R71	1-220-878-81	s	RES, CHIP 22 (1005)
R72	1-208-935-81	s	RES, CHIP 100K (1005)
R73	1-208-935-81	s	RES, CHIP 100K (1005)
R74	1-208-935-81	s	RES, CHIP 100K (1005)
R100	1-208-903-81	s	RES, CHIP 4.7K (1005)
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-927-81	s	RES, CHIP 47K (1005)
R103	1-208-903-81	s	RES, CHIP 4.7K (1005)
R104	1-208-903-81	s	RES, CHIP 4.7K (1005)
R105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R107	1-208-927-81	s	RES, CHIP 47K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-903-81	s	RES, CHIP 4.7K (1005)
R110	1-208-903-81	s	RES, CHIP 4.7K (1005)
R111	1-208-903-81	s	RES, CHIP 4.7K (1005)
R112	1-208-927-81	s	RES, CHIP 47K (1005)
R113	1-208-903-81	s	RES, CHIP 4.7K (1005)
R114	1-208-903-81	s	RES, CHIP 4.7K (1005)
R115	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R116	1-208-903-81	s	RES, CHIP 4.7K (1005)
R200	1-208-927-81	s	RES, CHIP 47K (1005)
R201	1-208-927-81	s	RES, CHIP 47K (1005)
R202	1-208-927-81	s	RES, CHIP 47K (1005)
R203	1-208-927-81	s	RES, CHIP 47K (1005)
R204	1-208-927-81	s	RES, CHIP 47K (1005)
R205	1-208-927-81	s	RES, CHIP 47K (1005)
R206	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-919-81	s	RES, CHIP 22K (1005)
R214	1-208-919-81	s	RES, CHIP 22K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R219	1-208-922-81	s	RES, CHIP 30K (1005)
R220	1-208-895-81	s	RES, CHIP 2.2K (1005)
R221	1-208-921-81	s	RES, CHIP 27K (1005)
R222	1-208-895-81	s	RES, CHIP 2.2K (1005)
R223	1-208-919-81	s	RES, CHIP 22K (1005)
R224	1-208-879-81	s	RES, CHIP 470 (1005)
R225	1-208-919-81	s	RES, CHIP 22K (1005)
R226	1-208-879-81	s	RES, CHIP 470 (1005)
R227	1-208-907-81	s	RES, CHIP 6.8K (1005)
R228	1-208-895-81	s	RES, CHIP 2.2K (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-208-895-81	s	RES, CHIP 2.2K (1005)
R232	1-208-911-81	s	RES, CHIP 10K (1005)
R233	1-208-903-81	s	RES, CHIP 4.7K (1005)
R234	1-208-903-81	s	RES, CHIP 4.7K (1005)
R235	1-208-903-81	s	RES, CHIP 4.7K (1005)
R236	1-208-903-81	s	RES, CHIP 4.7K (1005)
R237	1-208-903-81	s	RES, CHIP 4.7K (1005)
R238	1-208-903-81	s	RES, CHIP 4.7K (1005)
R239	1-208-903-81	s	RES, CHIP 4.7K (1005)
R240	1-208-911-81	s	RES, CHIP 10K (1005)
R241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R243	1-208-887-81	s	RES, CHIP 1.0K (1005)
R244	1-208-911-81	s	RES, CHIP 10K (1005)
R245	1-208-935-81	s	RES, CHIP 100K (1005)
R246	1-208-887-81	s	RES, CHIP 1.0K (1005)
R247	1-208-911-81	s	RES, CHIP 10K (1005)
R248	1-208-911-81	s	RES, CHIP 10K (1005)
R249	1-208-903-81	s	RES, CHIP 4.7K (1005)
R250	1-208-895-81	s	RES, CHIP 2.2K (1005)
R251	1-208-927-81	s	RES, CHIP 47K (1005)
R252	1-208-935-81	s	RES, CHIP 100K (1005)
R253	1-208-887-81	s	RES, CHIP 1.0K (1005)
R254	1-208-911-81	s	RES, CHIP 10K (1005)
R255	1-208-911-81	s	RES, CHIP 10K (1005)
R256	1-208-903-81	s	RES, CHIP 4.7K (1005)
R257	1-208-895-81	s	RES, CHIP 2.2K (1005)
R258	1-208-943-81	s	RES, CHIP 220K (1005)
R259	1-208-935-81	s	RES, CHIP 100K (1005)
R260	1-208-887-81	s	RES, CHIP 1.0K (1005)
R261	1-208-911-81	s	RES, CHIP 10K (1005)
R262	1-208-911-81	s	RES, CHIP 10K (1005)
R263	1-208-903-81	s	RES, CHIP 4.7K (1005)
R264	1-208-895-81	s	RES, CHIP 2.2K (1005)
R265	1-208-935-81	s	RES, CHIP 100K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R266	1-208-903-81	s	RES, CHIP 4.7K (1005)
R267	1-208-903-81	s	RES, CHIP 4.7K (1005)
R268	1-208-911-81	s	RES, CHIP 10K (1005)
R269	1-208-911-81	s	RES, CHIP 10K (1005)
R270	1-208-903-81	s	RES, CHIP 4.7K (1005)
R271	1-208-895-81	s	RES, CHIP 2.2K (1005)
R272	1-208-935-81	s	RES, CHIP 100K (1005)
R273	1-208-911-81	s	RES, CHIP 10K (1005)
R274	1-208-903-81	s	RES, CHIP 4.7K (1005)
R275	1-208-911-81	s	RES, CHIP 10K (1005)
R276	1-208-911-81	s	RES, CHIP 10K (1005)
R277	1-208-903-81	s	RES, CHIP 4.7K (1005)
R278	1-208-895-81	s	RES, CHIP 2.2K (1005)
R279	1-208-935-81	s	RES, CHIP 100K (1005)
R280	1-208-919-81	s	RES, CHIP 22K (1005)
R281	1-208-911-81	s	RES, CHIP 10K (1005)
R282	1-208-911-81	s	RES, CHIP 10K (1005)
R283	1-208-903-81	s	RES, CHIP 4.7K (1005)
R284	1-208-895-81	s	RES, CHIP 2.2K (1005)
R285	1-208-935-81	s	RES, CHIP 100K (1005)
R286	1-208-911-81	s	RES, CHIP 10K (1005)
R287	1-208-903-81	s	RES, CHIP 4.7K (1005)
R288	1-208-895-81	s	RES, CHIP 2.2K (1005)
R300	1-208-863-81	s	RES, CHIP 100 (1005)
R301	1-220-878-81	s	RES, CHIP 22 (1005)
R302	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-245-604-81	s	RES, CHIP 10M (1005)
R305	1-208-943-81	s	RES, CHIP 220K (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-208-919-81	s	RES, CHIP 22K (1005)
R308	1-220-870-81	s	RES, CHIP 10 (1005)
R309	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-208-911-81	s	RES, CHIP 10K (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-220-878-81	s	RES, CHIP 22 (1005)
R400	1-208-911-81	s	RES, CHIP 10K (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-863-81	s	RES, CHIP 100 (1005)
R403	1-208-863-81	s	RES, CHIP 100 (1005)
R404	1-208-863-81	s	RES, CHIP 100 (1005)
R405	1-220-878-81	s	RES, CHIP 22 (1005)
R406	1-208-863-81	s	RES, CHIP 100 (1005)
R408	1-220-878-81	s	RES, CHIP 22 (1005)
R409	1-220-878-81	s	RES, CHIP 22 (1005)
R410	1-220-878-81	s	RES, CHIP 22 (1005)
R411	1-220-878-81	s	RES, CHIP 22 (1005)
R412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R413	1-220-882-81	s	RES, CHIP 33 (1005)
R414	1-220-882-81	s	RES, CHIP 33 (1005)
R415	1-220-882-81	s	RES, CHIP 33 (1005)
R416	1-220-882-81	s	RES, CHIP 33 (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R419	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R421	1-220-878-81	s	RES, CHIP 22 (1005)
R422	1-220-878-81	s	RES, CHIP 22 (1005)
R423	1-220-878-81	s	RES, CHIP 22 (1005)
R424	1-220-878-81	s	RES, CHIP 22 (1005)
R425	1-220-878-81	s	RES, CHIP 22 (1005)
R426	1-220-878-81	s	RES, CHIP 22 (1005)
R427	1-220-878-81	s	RES, CHIP 22 (1005)
R428	1-220-878-81	s	RES, CHIP 22 (1005)
R429	1-220-878-81	s	RES, CHIP 22 (1005)
R430	1-220-878-81	s	RES, CHIP 22 (1005)
R431	1-220-878-81	s	RES, CHIP 22 (1005)
R432	1-220-878-81	s	RES, CHIP 22 (1005)
R433	1-220-878-81	s	RES, CHIP 22 (1005)
R434	1-220-878-81	s	RES, CHIP 22 (1005)
R435	1-220-878-81	s	RES, CHIP 22 (1005)
R436	1-220-878-81	s	RES, CHIP 22 (1005)
R437	1-220-878-81	s	RES, CHIP 22 (1005)
R438	1-220-878-81	s	RES, CHIP 22 (1005)
R439	1-220-878-81	s	RES, CHIP 22 (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-220-878-81	s	RES, CHIP 22 (1005)
R444	1-220-878-81	s	RES, CHIP 22 (1005)
R445	1-220-878-81	s	RES, CHIP 22 (1005)
R446	1-220-878-81	s	RES, CHIP 22 (1005)
R447	1-208-863-81	s	RES, CHIP 100 (1005)
R449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R451	1-220-878-81	s	RES, CHIP 22 (1005)
R452	1-220-878-81	s	RES, CHIP 22 (1005)
R453	1-220-878-81	s	RES, CHIP 22 (1005)
R454	1-220-878-81	s	RES, CHIP 22 (1005)
R456	1-208-863-81	s	RES, CHIP 100 (1005)
R462	1-208-887-81	s	RES, CHIP 1.0K (1005)
R463	1-208-911-81	s	RES, CHIP 10K (1005)
R464	1-208-911-81	s	RES, CHIP 10K (1005)
R465	1-208-911-81	s	RES, CHIP 10K (1005)
R466	1-208-911-81	s	RES, CHIP 10K (1005)
R467	1-208-911-81	s	RES, CHIP 10K (1005)
R468	1-208-911-81	s	RES, CHIP 10K (1005)
R500	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-911-81	s	RES, CHIP 10K (1005)
R502	1-208-911-81	s	RES, CHIP 10K (1005)
R503	1-208-911-81	s	RES, CHIP 10K (1005)
R504	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-208-911-81	s	RES, CHIP 10K (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-911-81	s	RES, CHIP 10K (1005)
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R511	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-208-911-81	s	RES, CHIP 10K (1005)
R514	1-208-911-81	s	RES, CHIP 10K (1005)
R515	1-208-911-81	s	RES, CHIP 10K (1005)
R517	1-208-911-81	s	RES, CHIP 10K (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-911-81	s	RES, CHIP 10K (1005)
R520	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R521	1-220-878-81	s	RES, CHIP 22 (1005)
R522	1-220-878-81	s	RES, CHIP 22 (1005)
R523	1-220-878-81	s	RES, CHIP 22 (1005)
R524	1-220-878-81	s	RES, CHIP 22 (1005)
R525	1-220-878-81	s	RES, CHIP 22 (1005)
R526	1-220-878-81	s	RES, CHIP 22 (1005)
R527	1-220-878-81	s	RES, CHIP 22 (1005)
R528	1-220-878-81	s	RES, CHIP 22 (1005)
R529	1-220-878-81	s	RES, CHIP 22 (1005)
R530	1-220-878-81	s	RES, CHIP 22 (1005)
R531	1-220-878-81	s	RES, CHIP 22 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-220-878-81	s	RES, CHIP 22 (1005)
R538	1-220-878-81	s	RES, CHIP 22 (1005)
R539	1-220-878-81	s	RES, CHIP 22 (1005)
R540	1-220-878-81	s	RES, CHIP 22 (1005)
R541	1-220-878-81	s	RES, CHIP 22 (1005)
R542	1-220-878-81	s	RES, CHIP 22 (1005)
R543	1-220-878-81	s	RES, CHIP 22 (1005)
R544	1-220-878-81	s	RES, CHIP 22 (1005)
R545	1-220-878-81	s	RES, CHIP 22 (1005)
R546	1-220-878-81	s	RES, CHIP 22 (1005)
R547	1-220-878-81	s	RES, CHIP 22 (1005)
R548	1-220-878-81	s	RES, CHIP 22 (1005)
R549	1-220-878-81	s	RES, CHIP 22 (1005)
R550	1-220-878-81	s	RES, CHIP 22 (1005)
R551	1-220-878-81	s	RES, CHIP 22 (1005)
R552	1-220-878-81	s	RES, CHIP 22 (1005)
R553	1-220-878-81	s	RES, CHIP 22 (1005)
R554	1-220-878-81	s	RES, CHIP 22 (1005)
R555	1-220-878-81	s	RES, CHIP 22 (1005)
R556	1-220-878-81	s	RES, CHIP 22 (1005)
R557	1-220-878-81	s	RES, CHIP 22 (1005)
R558	1-208-911-81	s	RES, CHIP 10K (1005)
R559	1-208-887-81	s	RES, CHIP 1.0K (1005)
R560	1-208-911-81	s	RES, CHIP 10K (1005)
R561	1-208-887-81	s	RES, CHIP 1.0K (1005)
R562	1-208-911-81	s	RES, CHIP 10K (1005)
R563	1-208-887-81	s	RES, CHIP 1.0K (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-208-911-81	s	RES, CHIP 10K (1005)
R566	1-208-887-81	s	RES, CHIP 1.0K (1005)
R567	1-208-911-81	s	RES, CHIP 10K (1005)
R568	1-208-911-81	s	RES, CHIP 10K (1005)
R569	1-208-887-81	s	RES, CHIP 1.0K (1005)
R570	1-208-911-81	s	RES, CHIP 10K (1005)
R571	1-208-911-81	s	RES, CHIP 10K (1005)
R572	1-208-887-81	s	RES, CHIP 1.0K (1005)
R573	1-208-911-81	s	RES, CHIP 10K (1005)
R574	1-208-887-81	s	RES, CHIP 1.0K (1005)
R576	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R577	1-208-911-81	s	RES, CHIP 10K (1005)
R578	1-208-887-81	s	RES, CHIP 1.0K (1005)
R579	1-208-911-81	s	RES, CHIP 10K (1005)
R580	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R581	1-208-911-81	s	RES, CHIP 10K (1005)
R582	1-208-911-81	s	RES, CHIP 10K (1005)
R583	1-208-911-81	s	RES, CHIP 10K (1005)
R584	1-208-911-81	s	RES, CHIP 10K (1005)
R585	1-208-911-81	s	RES, CHIP 10K (1005)
R586	1-208-911-81	s	RES, CHIP 10K (1005)
R587	1-208-911-81	s	RES, CHIP 10K (1005)
R588	1-208-911-81	s	RES, CHIP 10K (1005)
R589	1-208-911-81	s	RES, CHIP 10K (1005)
R590	1-208-887-81	s	RES, CHIP 1.0K (1005)
R591	1-208-887-81	s	RES, CHIP 1.0K (1005)
R592	1-208-887-81	s	RES, CHIP 1.0K (1005)
R593	1-208-887-81	s	RES, CHIP 1.0K (1005)
R594	1-208-887-81	s	RES, CHIP 1.0K (1005)
R595	1-208-911-81	s	RES, CHIP 10K (1005)
R596	1-208-911-81	s	RES, CHIP 10K (1005)
R597	1-208-911-81	s	RES, CHIP 10K (1005)
R598	1-208-911-81	s	RES, CHIP 10K (1005)
R599	1-208-887-81	s	RES, CHIP 1.0K (1005)
R600	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R601	1-220-878-81	s	RES, CHIP 22 (1005)
R602	1-208-935-81	s	RES, CHIP 100K (1005)
R603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R605	1-208-935-81	s	RES, CHIP 100K (1005)
R606	1-208-935-81	s	RES, CHIP 100K (1005)
R607	1-220-878-81	s	RES, CHIP 22 (1005)
R608	1-220-878-81	s	RES, CHIP 22 (1005)
R609	1-220-878-81	s	RES, CHIP 22 (1005)
R610	1-220-878-81	s	RES, CHIP 22 (1005)
R611	1-220-878-81	s	RES, CHIP 22 (1005)
R612	1-220-878-81	s	RES, CHIP 22 (1005)
R613	1-220-878-81	s	RES, CHIP 22 (1005)
R614	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-220-878-81	s	RES, CHIP 22 (1005)
R616	1-220-878-81	s	RES, CHIP 22 (1005)
R617	1-220-878-81	s	RES, CHIP 22 (1005)
R618	1-220-878-81	s	RES, CHIP 22 (1005)
R619	1-220-878-81	s	RES, CHIP 22 (1005)
R620	1-220-878-81	s	RES, CHIP 22 (1005)
R621	1-220-878-81	s	RES, CHIP 22 (1005)
R622	1-220-878-81	s	RES, CHIP 22 (1005)
R623	1-220-878-81	s	RES, CHIP 22 (1005)
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R625	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-220-878-81	s	RES, CHIP 22 (1005)
R627	1-220-878-81	s	RES, CHIP 22 (1005)
R628	1-220-878-81	s	RES, CHIP 22 (1005)
R629	1-220-878-81	s	RES, CHIP 22 (1005)
R630	1-220-878-81	s	RES, CHIP 22 (1005)
R631	1-220-878-81	s	RES, CHIP 22 (1005)
R632	1-208-935-81	s	RES, CHIP 100K (1005)
R633	1-208-935-81	s	RES, CHIP 100K (1005)
R634	1-208-935-81	s	RES, CHIP 100K (1005)
R635	1-208-935-81	s	RES, CHIP 100K (1005)
R636	1-208-935-81	s	RES, CHIP 100K (1005)
R637	1-208-935-81	s	RES, CHIP 100K (1005)
R638	1-208-935-81	s	RES, CHIP 100K (1005)
R639	1-208-935-81	s	RES, CHIP 100K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R640	1-208-935-81	s	RES, CHIP 100K (1005)
R641	1-208-935-81	s	RES, CHIP 100K (1005)
R642	1-208-935-81	s	RES, CHIP 100K (1005)
R643	1-208-935-81	s	RES, CHIP 100K (1005)
R644	1-208-935-81	s	RES, CHIP 100K (1005)
R645	1-208-935-81	s	RES, CHIP 100K (1005)
R646	1-208-935-81	s	RES, CHIP 100K (1005)
R647	1-208-935-81	s	RES, CHIP 100K (1005)
R648	1-208-935-81	s	RES, CHIP 100K (1005)
R649	1-208-935-81	s	RES, CHIP 100K (1005)
R650	1-208-935-81	s	RES, CHIP 100K (1005)
R651	1-208-935-81	s	RES, CHIP 100K (1005)
R652	1-208-935-81	s	RES, CHIP 100K (1005)
R653	1-208-935-81	s	RES, CHIP 100K (1005)
R654	1-208-935-81	s	RES, CHIP 100K (1005)
R655	1-220-878-81	s	RES, CHIP 22 (1005)
R656	1-220-878-81	s	RES, CHIP 22 (1005)
R657	1-220-878-81	s	RES, CHIP 22 (1005)
R658	1-220-878-81	s	RES, CHIP 22 (1005)
R659	1-220-878-81	s	RES, CHIP 22 (1005)
R660	1-220-878-81	s	RES, CHIP 22 (1005)
R661	1-220-878-81	s	RES, CHIP 22 (1005)
R662	1-220-878-81	s	RES, CHIP 22 (1005)
R663	1-220-878-81	s	RES, CHIP 22 (1005)
R664	1-220-878-81	s	RES, CHIP 22 (1005)
R665	1-220-878-81	s	RES, CHIP 22 (1005)
R666	1-220-878-81	s	RES, CHIP 22 (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R700	1-208-879-81	s	RES, CHIP 470 (1005)
R701	1-220-878-81	s	RES, CHIP 22 (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)
R703	1-220-878-81	s	RES, CHIP 22 (1005)
R704	1-220-878-81	s	RES, CHIP 22 (1005)
R705	1-220-878-81	s	RES, CHIP 22 (1005)
R706	1-208-935-81	s	RES, CHIP 100K (1005)
R707	1-208-935-81	s	RES, CHIP 100K (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R709	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-220-878-81	s	RES, CHIP 22 (1005)
R711	1-220-878-81	s	RES, CHIP 22 (1005)
R712	1-220-878-81	s	RES, CHIP 22 (1005)
R713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R714	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R715	1-208-935-81	s	RES, CHIP 100K (1005)
R716	1-208-935-81	s	RES, CHIP 100K (1005)
R717	1-208-935-81	s	RES, CHIP 100K (1005)
R718	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R719	1-208-935-81	s	RES, CHIP 100K (1005)
R720	1-220-878-81	s	RES, CHIP 22 (1005)
R721	1-220-878-81	s	RES, CHIP 22 (1005)
R722	1-220-878-81	s	RES, CHIP 22 (1005)
R723	1-220-878-81	s	RES, CHIP 22 (1005)
R724	1-220-878-81	s	RES, CHIP 22 (1005)
R725	1-220-878-81	s	RES, CHIP 22 (1005)
R726	1-220-878-81	s	RES, CHIP 22 (1005)
R727	1-220-878-81	s	RES, CHIP 22 (1005)
R728	1-220-878-81	s	RES, CHIP 22 (1005)
R729	1-220-878-81	s	RES, CHIP 22 (1005)
R730	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R731	1-220-878-81	s	RES, CHIP 22 (1005)
R732	1-220-878-81	s	RES, CHIP 22 (1005)
R733	1-220-878-81	s	RES, CHIP 22 (1005)
R734	1-220-878-81	s	RES, CHIP 22 (1005)
R735	1-220-878-81	s	RES, CHIP 22 (1005)
R1000	1-208-935-81	s	RES, CHIP 100K (1005)
R1001	1-208-935-81	s	RES, CHIP 100K (1005)
R1002	1-208-935-81	s	RES, CHIP 100K (1005)
R1003	1-208-935-81	s	RES, CHIP 100K (1005)
R1004	1-208-935-81	s	RES, CHIP 100K (1005)
R1005	1-208-935-81	s	RES, CHIP 100K (1005)
R1006	1-208-935-81	s	RES, CHIP 100K (1005)
R1007	1-208-935-81	s	RES, CHIP 100K (1005)
R1008	1-208-935-81	s	RES, CHIP 100K (1005)
R1009	1-208-935-81	s	RES, CHIP 100K (1005)
R1010	1-208-935-81	s	RES, CHIP 100K (1005)
R1011	1-208-935-81	s	RES, CHIP 100K (1005)
R1100	1-208-935-81	s	RES, CHIP 100K (1005)
R1104	1-208-935-81	s	RES, CHIP 100K (1005)
R1107	1-208-935-81	s	RES, CHIP 100K (1005)
R1224	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-911-81	s	RES, CHIP 10K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-208-911-81	s	RES, CHIP 10K (1005)
R1228	1-208-911-81	s	RES, CHIP 10K (1005)
R1229	1-208-911-81	s	RES, CHIP 10K (1005)
R1230	1-208-935-81	s	RES, CHIP 100K (1005)
R1232	1-208-935-81	s	RES, CHIP 100K (1005)
R1234	1-208-935-81	s	RES, CHIP 100K (1005)
R1236	1-208-935-81	s	RES, CHIP 100K (1005)
R1238	1-208-911-81	s	RES, CHIP 10K (1005)
R1239	1-208-911-81	s	RES, CHIP 10K (1005)
R1300	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1302	1-208-911-81	s	RES, CHIP 10K (1005)
R1303	1-220-878-81	s	RES, CHIP 22 (1005)
R1304	1-208-863-81	s	RES, CHIP 100 (1005)
R1305	1-208-935-81	s	RES, CHIP 100K (1005)
R1306	1-208-911-81	s	RES, CHIP 10K (1005)
R1307	1-208-911-81	s	RES, CHIP 10K (1005)
R1308	1-208-911-81	s	RES, CHIP 10K (1005)
R1309	1-208-911-81	s	RES, CHIP 10K (1005)
R1310	1-208-911-81	s	RES, CHIP 10K (1005)
R1311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1316	1-208-935-81	s	RES, CHIP 100K (1005)
R1317	1-208-911-81	s	RES, CHIP 10K (1005)
R1319	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1320	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1321	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1322	1-208-943-81	s	RES, CHIP 220K (1005)
R1323	1-208-935-81	s	RES, CHIP 100K (1005)
R1324	1-208-904-81	s	RES, CHIP 5.1K (1005)
R1325	1-208-904-81	s	RES, CHIP 5.1K (1005)
R1326	1-208-904-81	s	RES, CHIP 5.1K (1005)
R1327	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1328	1-208-857-81	s	RES, CHIP 56 (1005)
R1329	1-208-857-81	s	RES, CHIP 56 (1005)
R1330	1-208-857-81	s	RES, CHIP 56 (1005)
R1331	1-208-857-81	s	RES, CHIP 56 (1005)
R1332	1-208-857-81	s	RES, CHIP 56 (1005)
R1333	1-208-857-81	s	RES, CHIP 56 (1005)
R1334	1-208-857-81	s	RES, CHIP 56 (1005)
R1335	1-208-857-81	s	RES, CHIP 56 (1005)
R1336	1-208-857-81	s	RES, CHIP 56 (1005)
R1337	1-208-857-81	s	RES, CHIP 56 (1005)
R1338	1-208-857-81	s	RES, CHIP 56 (1005)
R1339	1-208-857-81	s	RES, CHIP 56 (1005)
R1340	1-208-911-81	s	RES, CHIP 10K (1005)
R1400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1412	1-220-878-81	s	RES, CHIP 22 (1005)
R1413	1-220-878-81	s	RES, CHIP 22 (1005)
R1414	1-220-878-81	s	RES, CHIP 22 (1005)
R1415	1-220-878-81	s	RES, CHIP 22 (1005)
R1416	1-220-878-81	s	RES, CHIP 22 (1005)
R1417	1-220-878-81	s	RES, CHIP 22 (1005)
R1418	1-220-878-81	s	RES, CHIP 22 (1005)
R1419	1-220-878-81	s	RES, CHIP 22 (1005)
R1420	1-220-878-81	s	RES, CHIP 22 (1005)
R1421	1-220-878-81	s	RES, CHIP 22 (1005)
R1422	1-220-878-81	s	RES, CHIP 22 (1005)
R1423	1-220-878-81	s	RES, CHIP 22 (1005)
R1424	1-220-878-81	s	RES, CHIP 22 (1005)
R1425	1-220-878-81	s	RES, CHIP 22 (1005)
R1426	1-220-878-81	s	RES, CHIP 22 (1005)
R1427	1-220-878-81	s	RES, CHIP 22 (1005)
R1428	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1429	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1430	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1431	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1433	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1436	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1437	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1438	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1445	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1446	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1449	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1457	1-208-911-81	s	RES, CHIP 10K (1005)
R1458	1-208-911-81	s	RES, CHIP 10K (1005)
R1459	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1463	1-208-911-81	s	RES, CHIP 10K (1005)
R1464	1-208-911-81	s	RES, CHIP 10K (1005)
R1465	1-208-911-81	s	RES, CHIP 10K (1005)
R1466	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1469	1-208-911-81	s	RES, CHIP 10K (1005)
R1470	1-208-911-81	s	RES, CHIP 10K (1005)
R1471	1-208-911-81	s	RES, CHIP 10K (1005)
R1472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1475	1-208-911-81	s	RES, CHIP 10K (1005)
R1476	1-208-911-81	s	RES, CHIP 10K (1005)
R1477	1-208-911-81	s	RES, CHIP 10K (1005)
R1478	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1481	1-208-911-81	s	RES, CHIP 10K (1005)
R1482	1-208-911-81	s	RES, CHIP 10K (1005)
R1483	1-208-911-81	s	RES, CHIP 10K (1005)
R1485	1-208-911-81	s	RES, CHIP 10K (1005)
R1486	1-208-911-81	s	RES, CHIP 10K (1005)
R1488	1-208-911-81	s	RES, CHIP 10K (1005)
R1489	1-208-911-81	s	RES, CHIP 10K (1005)
R1490	1-208-911-81	s	RES, CHIP 10K (1005)
R1492	1-208-911-81	s	RES, CHIP 10K (1005)
R1493	1-208-911-81	s	RES, CHIP 10K (1005)
R1500	1-208-911-81	s	RES, CHIP 10K (1005)
R1501	1-208-911-81	s	RES, CHIP 10K (1005)
R1502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1503	1-208-911-81	s	RES, CHIP 10K (1005)
R1504	1-208-911-81	s	RES, CHIP 10K (1005)
R1505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1506	1-208-911-81	s	RES, CHIP 10K (1005)
R1507	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1509	1-208-911-81	s	RES, CHIP 10K (1005)
R1510	1-208-911-81	s	RES, CHIP 10K (1005)
R1511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1512	1-208-911-81	s	RES, CHIP 10K (1005)
R1513	1-208-911-81	s	RES, CHIP 10K (1005)
R1514	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1515	1-208-855-81	s	RES, CHIP 47 (1005)
R1516	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1517	1-220-882-81	s	RES, CHIP 33 (1005)
R1518	1-220-882-81	s	RES, CHIP 33 (1005)
R1519	1-208-855-81	s	RES, CHIP 47 (1005)
R1520	1-208-855-81	s	RES, CHIP 47 (1005)
R1521	1-208-855-81	s	RES, CHIP 47 (1005)
R1522	1-208-855-81	s	RES, CHIP 47 (1005)
R1523	1-208-855-81	s	RES, CHIP 47 (1005)
R1526	1-208-855-81	s	RES, CHIP 47 (1005)
R1527	1-208-855-81	s	RES, CHIP 47 (1005)
R1528	1-208-855-81	s	RES, CHIP 47 (1005)
R1529	1-208-855-81	s	RES, CHIP 47 (1005)
R1530	1-208-855-81	s	RES, CHIP 47 (1005)
R1531	1-208-855-81	s	RES, CHIP 47 (1005)
R1532	1-208-855-81	s	RES, CHIP 47 (1005)
R1535	1-208-855-81	s	RES, CHIP 47 (1005)
R1536	1-208-855-81	s	RES, CHIP 47 (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1537	1-208-855-81	s	RES, CHIP 47 (1005)
R1538	1-208-855-81	s	RES, CHIP 47 (1005)
R1539	1-208-855-81	s	RES, CHIP 47 (1005)
R1542	1-208-855-81	s	RES, CHIP 47 (1005)
R1543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1545	1-208-911-81	s	RES, CHIP 10K (1005)
R1546	1-208-911-81	s	RES, CHIP 10K (1005)
R1547	1-208-911-81	s	RES, CHIP 10K (1005)
R1548	1-208-911-81	s	RES, CHIP 10K (1005)
R1549	1-208-911-81	s	RES, CHIP 10K (1005)
R1550	1-208-911-81	s	RES, CHIP 10K (1005)
R1551	1-208-911-81	s	RES, CHIP 10K (1005)
R1552	1-208-911-81	s	RES, CHIP 10K (1005)
R1553	1-208-855-81	s	RES, CHIP 47 (1005)
R1554	1-208-911-81	s	RES, CHIP 10K (1005)
R1555	1-208-911-81	s	RES, CHIP 10K (1005)
R1556	1-220-882-81	s	RES, CHIP 33 (1005)
R1557	1-220-882-81	s	RES, CHIP 33 (1005)
R1559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1560	1-208-855-81	s	RES, CHIP 47 (1005)
R1561	1-208-855-81	s	RES, CHIP 47 (1005)
R1562	1-208-855-81	s	RES, CHIP 47 (1005)
R1563	1-208-855-81	s	RES, CHIP 47 (1005)
R1564	1-208-855-81	s	RES, CHIP 47 (1005)
R1566	1-208-855-81	s	RES, CHIP 47 (1005)
R1567	1-208-855-81	s	RES, CHIP 47 (1005)
R1568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1700	1-208-863-81	s	RES, CHIP 100 (1005)
R1701	1-208-863-81	s	RES, CHIP 100 (1005)
R1702	1-208-863-81	s	RES, CHIP 100 (1005)
R1703	1-208-863-81	s	RES, CHIP 100 (1005)
R1704	1-208-863-81	s	RES, CHIP 100 (1005)
R1705	1-208-863-81	s	RES, CHIP 100 (1005)
R1706	1-208-863-81	s	RES, CHIP 100 (1005)
R1707	1-208-863-81	s	RES, CHIP 100 (1005)
R1708	1-208-863-81	s	RES, CHIP 100 (1005)
R1709	1-208-863-81	s	RES, CHIP 100 (1005)
R1710	1-208-863-81	s	RES, CHIP 100 (1005)
R1711	1-208-863-81	s	RES, CHIP 100 (1005)
R1712	1-208-863-81	s	RES, CHIP 100 (1005)
R1713	1-208-863-81	s	RES, CHIP 100 (1005)
R1714	1-208-863-81	s	RES, CHIP 100 (1005)
R1715	1-208-863-81	s	RES, CHIP 100 (1005)
R1716	1-208-863-81	s	RES, CHIP 100 (1005)
R1717	1-208-863-81	s	RES, CHIP 100 (1005)
R1800	1-208-863-81	s	RES, CHIP 100 (1005)
R1801	1-208-863-81	s	RES, CHIP 100 (1005)
R1802	1-208-863-81	s	RES, CHIP 100 (1005)
R1803	1-208-863-81	s	RES, CHIP 100 (1005)
R1804	1-208-863-81	s	RES, CHIP 100 (1005)
R1805	1-208-863-81	s	RES, CHIP 100 (1005)
R1806	1-208-863-81	s	RES, CHIP 100 (1005)
R1807	1-208-863-81	s	RES, CHIP 100 (1005)
R1808	1-208-863-81	s	RES, CHIP 100 (1005)
R1809	1-208-863-81	s	RES, CHIP 100 (1005)
R1810	1-208-863-81	s	RES, CHIP 100 (1005)
R1811	1-208-863-81	s	RES, CHIP 100 (1005)
R1812	1-208-863-81	s	RES, CHIP 100 (1005)
R1813	1-208-863-81	s	RES, CHIP 100 (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1814	1-208-863-81	s	RES, CHIP 100 (1005)
R1815	1-208-863-81	s	RES, CHIP 100 (1005)
R1816	1-208-863-81	s	RES, CHIP 100 (1005)
R1817	1-208-863-81	s	RES, CHIP 100 (1005)
R1900	1-208-863-81	s	RES, CHIP 100 (1005)
R1901	1-208-863-81	s	RES, CHIP 100 (1005)
R1902	1-208-863-81	s	RES, CHIP 100 (1005)
R1903	1-208-863-81	s	RES, CHIP 100 (1005)
R2000	1-208-863-81	s	RES, CHIP 100 (1005)
R2001	1-208-863-81	s	RES, CHIP 100 (1005)
R2002	1-208-863-81	s	RES, CHIP 100 (1005)
R2003	1-208-863-81	s	RES, CHIP 100 (1005)
R2004	1-208-863-81	s	RES, CHIP 100 (1005)
R2005	1-208-863-81	s	RES, CHIP 100 (1005)
R2006	1-208-863-81	s	RES, CHIP 100 (1005)
R2007	1-208-863-81	s	RES, CHIP 100 (1005)
R2008	1-208-863-81	s	RES, CHIP 100 (1005)
R2009	1-208-863-81	s	RES, CHIP 100 (1005)
R2010	1-208-863-81	s	RES, CHIP 100 (1005)
R2011	1-208-863-81	s	RES, CHIP 100 (1005)
R2012	1-208-863-81	s	RES, CHIP 100 (1005)
R2013	1-208-863-81	s	RES, CHIP 100 (1005)
R2014	1-208-863-81	s	RES, CHIP 100 (1005)
R2015	1-208-863-81	s	RES, CHIP 100 (1005)
R2016	1-208-863-81	s	RES, CHIP 100 (1005)
R2017	1-208-863-81	s	RES, CHIP 100 (1005)
R2018	1-208-863-81	s	RES, CHIP 100 (1005)
R2100	1-208-863-81	s	RES, CHIP 100 (1005)
R2101	1-208-863-81	s	RES, CHIP 100 (1005)
R2102	1-208-863-81	s	RES, CHIP 100 (1005)
R2103	1-208-863-81	s	RES, CHIP 100 (1005)
R2104	1-208-863-81	s	RES, CHIP 100 (1005)
R2105	1-208-863-81	s	RES, CHIP 100 (1005)
R2106	1-208-863-81	s	RES, CHIP 100 (1005)
R2107	1-208-863-81	s	RES, CHIP 100 (1005)
R2108	1-208-863-81	s	RES, CHIP 100 (1005)
R2109	1-208-863-81	s	RES, CHIP 100 (1005)
R2110	1-208-863-81	s	RES, CHIP 100 (1005)
R2111	1-208-863-81	s	RES, CHIP 100 (1005)
R2112	1-208-863-81	s	RES, CHIP 100 (1005)
R2113	1-208-863-81	s	RES, CHIP 100 (1005)
R2114	1-208-863-81	s	RES, CHIP 100 (1005)
R2115	1-208-863-81	s	RES, CHIP 100 (1005)
R2116	1-208-863-81	s	RES, CHIP 100 (1005)
R2117	1-208-863-81	s	RES, CHIP 100 (1005)
R2118	1-208-863-81	s	RES, CHIP 100 (1005)
R2200	1-220-878-81	s	RES, CHIP 22 (1005)
R2201	1-220-878-81	s	RES, CHIP 22 (1005)
R2202	1-220-878-81	s	RES, CHIP 22 (1005)
R2203	1-220-878-81	s	RES, CHIP 22 (1005)
R2204	1-220-878-81	s	RES, CHIP 22 (1005)
R2205	1-220-878-81	s	RES, CHIP 22 (1005)
R2300	1-220-878-81	s	RES, CHIP 22 (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-220-878-81	s	RES, CHIP 22 (1005)
R2303	1-220-878-81	s	RES, CHIP 22 (1005)
R2304	1-220-878-81	s	RES, CHIP 22 (1005)
R2305	1-220-878-81	s	RES, CHIP 22 (1005)
R2400	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2401	1-220-878-81	s	RES, CHIP 22 (1005)
R2402	1-220-878-81	s	RES, CHIP 22 (1005)
R2403	1-220-878-81	s	RES, CHIP 22 (1005)
R2404	1-220-878-81	s	RES, CHIP 22 (1005)
R2405	1-220-878-81	s	RES, CHIP 22 (1005)
R2500	1-220-878-81	s	RES, CHIP 22 (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)
R2502	1-220-878-81	s	RES, CHIP 22 (1005)
R2503	1-220-878-81	s	RES, CHIP 22 (1005)
R2504	1-220-878-81	s	RES, CHIP 22 (1005)
R2505	1-220-878-81	s	RES, CHIP 22 (1005)
R2602	1-208-863-81	s	RES, CHIP 100 (1005)
R2603	1-208-863-81	s	RES, CHIP 100 (1005)
R2604	1-220-878-81	s	RES, CHIP 22 (1005)
R2605	1-220-878-81	s	RES, CHIP 22 (1005)
R2606	1-220-878-81	s	RES, CHIP 22 (1005)
R2607	1-220-878-81	s	RES, CHIP 22 (1005)
R2608	1-220-878-81	s	RES, CHIP 22 (1005)
R2609	1-220-878-81	s	RES, CHIP 22 (1005)
R2610	1-220-878-81	s	RES, CHIP 22 (1005)
R2611	1-220-878-81	s	RES, CHIP 22 (1005)
R2612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2614	1-208-911-81	s	RES, CHIP 10K (1005)
R2615	1-208-911-81	s	RES, CHIP 10K (1005)
R2702	1-208-863-81	s	RES, CHIP 100 (1005)
R2703	1-208-863-81	s	RES, CHIP 100 (1005)
R2704	1-220-878-81	s	RES, CHIP 22 (1005)
R2705	1-220-878-81	s	RES, CHIP 22 (1005)
R2706	1-220-878-81	s	RES, CHIP 22 (1005)
R2707	1-220-878-81	s	RES, CHIP 22 (1005)
R2708	1-220-878-81	s	RES, CHIP 22 (1005)
R2709	1-220-878-81	s	RES, CHIP 22 (1005)
R2710	1-220-878-81	s	RES, CHIP 22 (1005)
R2711	1-220-878-81	s	RES, CHIP 22 (1005)
R2712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2714	1-208-911-81	s	RES, CHIP 10K (1005)
R2715	1-208-911-81	s	RES, CHIP 10K (1005)
R2802	1-208-863-81	s	RES, CHIP 100 (1005)
R2803	1-208-863-81	s	RES, CHIP 100 (1005)
R2804	1-220-878-81	s	RES, CHIP 22 (1005)
R2805	1-220-878-81	s	RES, CHIP 22 (1005)
R2806	1-220-878-81	s	RES, CHIP 22 (1005)
R2807	1-220-878-81	s	RES, CHIP 22 (1005)
R2808	1-220-878-81	s	RES, CHIP 22 (1005)
R2809	1-220-878-81	s	RES, CHIP 22 (1005)
R2810	1-220-878-81	s	RES, CHIP 22 (1005)
R2811	1-220-878-81	s	RES, CHIP 22 (1005)
R2812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2814	1-208-911-81	s	RES, CHIP 10K (1005)
R2815	1-208-911-81	s	RES, CHIP 10K (1005)
R2902	1-208-863-81	s	RES, CHIP 100 (1005)
R2903	1-208-863-81	s	RES, CHIP 100 (1005)
R2904	1-220-878-81	s	RES, CHIP 22 (1005)
R2905	1-220-878-81	s	RES, CHIP 22 (1005)
R2906	1-220-878-81	s	RES, CHIP 22 (1005)
R2907	1-220-878-81	s	RES, CHIP 22 (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2908	1-220-878-81	s	RES, CHIP 22 (1005)
R2909	1-220-878-81	s	RES, CHIP 22 (1005)
R2910	1-220-878-81	s	RES, CHIP 22 (1005)
R2911	1-220-878-81	s	RES, CHIP 22 (1005)
R2912	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2914	1-208-911-81	s	RES, CHIP 10K (1005)
R2915	1-208-911-81	s	RES, CHIP 10K (1005)
R3000	1-208-911-81	s	RES, CHIP 10K (1005)
R3002	1-208-911-81	s	RES, CHIP 10K (1005)
R3004	1-208-911-81	s	RES, CHIP 10K (1005)
R3006	1-208-911-81	s	RES, CHIP 10K (1005)
R3008	1-208-911-81	s	RES, CHIP 10K (1005)
R3010	1-208-911-81	s	RES, CHIP 10K (1005)
R3013	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3015	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-911-81	s	RES, CHIP 10K (1005)
R3020	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3021	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3022	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3023	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3024	1-208-911-81	s	RES, CHIP 10K (1005)
R3025	1-208-911-81	s	RES, CHIP 10K (1005)
R3026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3032	1-208-911-81	s	RES, CHIP 10K (1005)
R3033	1-208-911-81	s	RES, CHIP 10K (1005)
R3034	1-208-911-81	s	RES, CHIP 10K (1005)
R3035	1-208-911-81	s	RES, CHIP 10K (1005)
R3036	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3037	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3038	1-208-855-81	s	RES, CHIP 47 (1005)
R3100	1-208-911-81	s	RES, CHIP 10K (1005)
R3102	1-208-911-81	s	RES, CHIP 10K (1005)
R3104	1-208-911-81	s	RES, CHIP 10K (1005)
R3106	1-208-911-81	s	RES, CHIP 10K (1005)
R3108	1-208-911-81	s	RES, CHIP 10K (1005)
R3110	1-208-911-81	s	RES, CHIP 10K (1005)
R3113	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3115	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3116	1-208-911-81	s	RES, CHIP 10K (1005)
R3118	1-208-911-81	s	RES, CHIP 10K (1005)
R3120	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3121	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3122	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3123	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3124	1-208-911-81	s	RES, CHIP 10K (1005)
R3125	1-208-911-81	s	RES, CHIP 10K (1005)
R3126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3131	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3132	1-208-911-81	s	RES, CHIP 10K (1005)
R3133	1-208-911-81	s	RES, CHIP 10K (1005)
R3134	1-208-911-81	s	RES, CHIP 10K (1005)
R3135	1-208-911-81	s	RES, CHIP 10K (1005)
R3136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3138	1-208-855-81	s	RES, CHIP 47 (1005)
R3200	1-208-863-81	s	RES, CHIP 100 (1005)
R3201	1-208-863-81	s	RES, CHIP 100 (1005)
R3202	1-208-863-81	s	RES, CHIP 100 (1005)
R3203	1-208-863-81	s	RES, CHIP 100 (1005)
R3204	1-208-863-81	s	RES, CHIP 100 (1005)
R3205	1-208-863-81	s	RES, CHIP 100 (1005)
R3206	1-208-863-81	s	RES, CHIP 100 (1005)
R3207	1-208-863-81	s	RES, CHIP 100 (1005)
R3208	1-208-863-81	s	RES, CHIP 100 (1005)
R3209	1-208-863-81	s	RES, CHIP 100 (1005)
R3210	1-208-863-81	s	RES, CHIP 100 (1005)
R3211	1-208-863-81	s	RES, CHIP 100 (1005)
R3212	1-220-878-81	s	RES, CHIP 22 (1005)
R3213	1-220-878-81	s	RES, CHIP 22 (1005)
R3214	1-220-878-81	s	RES, CHIP 22 (1005)
R3215	1-208-911-81	s	RES, CHIP 10K (1005)
R3216	1-208-911-81	s	RES, CHIP 10K (1005)
R3217	1-208-911-81	s	RES, CHIP 10K (1005)
R3218	1-208-911-81	s	RES, CHIP 10K (1005)
R3220	1-208-911-81	s	RES, CHIP 10K (1005)
R3222	1-208-911-81	s	RES, CHIP 10K (1005)
R3224	1-208-911-81	s	RES, CHIP 10K (1005)
R3225	1-208-911-81	s	RES, CHIP 10K (1005)
R3226	1-208-911-81	s	RES, CHIP 10K (1005)
R3227	1-208-911-81	s	RES, CHIP 10K (1005)
R3228	1-208-911-81	s	RES, CHIP 10K (1005)
R3229	1-208-911-81	s	RES, CHIP 10K (1005)
R3300	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3301	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3302	1-208-911-81	s	RES, CHIP 10K (1005)
R3303	1-208-911-81	s	RES, CHIP 10K (1005)
R3304	1-208-911-81	s	RES, CHIP 10K (1005)
R3305	1-208-911-81	s	RES, CHIP 10K (1005)
R3306	1-208-911-81	s	RES, CHIP 10K (1005)
R3307	1-208-911-81	s	RES, CHIP 10K (1005)
R3308	1-208-911-81	s	RES, CHIP 10K (1005)
R3309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3311	1-208-911-81	s	RES, CHIP 10K (1005)
R3312	1-208-911-81	s	RES, CHIP 10K (1005)
R3313	1-208-911-81	s	RES, CHIP 10K (1005)
R3314	1-208-911-81	s	RES, CHIP 10K (1005)
R3315	1-208-911-81	s	RES, CHIP 10K (1005)
R3316	1-208-911-81	s	RES, CHIP 10K (1005)
R3317	1-208-911-81	s	RES, CHIP 10K (1005)
R3500	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3501	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3502	1-208-911-81	s	RES, CHIP 10K (1005)
R3503	1-208-911-81	s	RES, CHIP 10K (1005)
R3504	1-208-911-81	s	RES, CHIP 10K (1005)
R3505	1-208-911-81	s	RES, CHIP 10K (1005)
R3506	1-208-911-81	s	RES, CHIP 10K (1005)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3507	1-208-911-81	s	RES, CHIP 10K (1005)
R3508	1-208-911-81	s	RES, CHIP 10K (1005)
R3509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3511	1-208-911-81	s	RES, CHIP 10K (1005)
R3512	1-208-911-81	s	RES, CHIP 10K (1005)
R3513	1-208-911-81	s	RES, CHIP 10K (1005)
R3514	1-208-911-81	s	RES, CHIP 10K (1005)
R3515	1-208-911-81	s	RES, CHIP 10K (1005)
R3516	1-208-911-81	s	RES, CHIP 10K (1005)
R3517	1-208-911-81	s	RES, CHIP 10K (1005)
R3700	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3701	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3702	1-208-911-81	s	RES, CHIP 10K (1005)
R3703	1-208-911-81	s	RES, CHIP 10K (1005)
R3704	1-208-911-81	s	RES, CHIP 10K (1005)
R3705	1-208-911-81	s	RES, CHIP 10K (1005)
R3706	1-208-911-81	s	RES, CHIP 10K (1005)
R3707	1-208-911-81	s	RES, CHIP 10K (1005)
R3708	1-208-911-81	s	RES, CHIP 10K (1005)
R3709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3711	1-208-911-81	s	RES, CHIP 10K (1005)
R3712	1-208-911-81	s	RES, CHIP 10K (1005)
R3713	1-208-911-81	s	RES, CHIP 10K (1005)
R3714	1-208-911-81	s	RES, CHIP 10K (1005)
R3715	1-208-911-81	s	RES, CHIP 10K (1005)
R3716	1-208-911-81	s	RES, CHIP 10K (1005)
R3717	1-208-911-81	s	RES, CHIP 10K (1005)
R4500	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4501	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4502	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4503	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4504	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4505	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4506	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4507	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4508	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4509	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4900	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4901	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4902	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4903	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4904	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4905	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4906	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4907	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4908	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4909	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R5306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB600	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB602	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB603	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB604	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB605	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB606	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB607	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB608	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB609	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB610	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB611	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB612	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB613	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB700	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB800	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB801	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB802	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB803	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB804	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB805	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB806	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB807	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB808	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB813	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB814	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB815	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB900	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB902	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB903	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB904	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB905	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB906	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB907	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB908	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB909	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB910	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB911	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB912	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB913	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB914	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB915	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3000	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3001	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3002	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3003	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3100	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3101	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3102	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3103	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S1	1-771-721-21	s	SWITCH, TACTILE
S600	1-771-721-21	s	SWITCH, TACTILE
S700	1-762-117-21	s	SWITCH, ROTARY
TP1	1-535-877-22	s	CHIP, CHECKER
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP103	1-535-877-22	s	CHIP, CHECKER
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER

(MIX-52 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP404	1-535-877-22	s	CHIP, CHECKER
TP405	1-535-877-22	s	CHIP, CHECKER
TP406	1-535-877-22	s	CHIP, CHECKER
TP407	1-535-877-22	s	CHIP, CHECKER
TP700	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
X300	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X301	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X302	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X400	1-813-480-11	s	OSCILLATOR, CRYSTAL
X1300	1-795-796-11	s	VIBRATOR, CRYSTAL (24.576 MHz)

MY-114 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
9pcs	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
3pcs	3-636-891-01	o	SPACER
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
8pcs	3-942-866-02	s	NUT (M3) (3X0.5), NYLON
2pcs	7-626-300-54	s	SPRING PIN 3X6
9pcs	7-682-946-01	s	SCREW +PSW 3X5
2pcs	9-911-841-99	s	CUSHION
C1	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C2	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C4	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C5	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C6	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C7	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C8	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C9	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C10	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C11	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C12	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C13	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C14	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C15	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C16	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C17	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C18	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C19	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C20	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C21	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C22	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C23	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C24	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C25	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C26	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C27	1-100-352-91	s	CAP, CERAMIC 1MF C (1608)
C28	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C29	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C30	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C31	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C32	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C33	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C200	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C201	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C202	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C203	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C204	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C205	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C206	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C207	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C208	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C235	1-100-986-21	s	CAP, ELECT 330MF
C236	1-100-986-21	s	CAP, ELECT 330MF
C237	1-100-986-21	s	CAP, ELECT 330MF
C238	1-100-986-21	s	CAP, ELECT 330MF
C239	1-100-986-21	s	CAP, ELECT 330MF
C240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C241	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C242	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C244	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C245	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C246	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C247	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C300	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C301	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C302	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C400	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C401	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C402	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C403	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C404	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C405	1-128-414-21	s	CAP, CHIP ELECT 220MF
C406	1-128-414-21	s	CAP, CHIP ELECT 220MF
C407	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C408	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C411	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C412	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C413	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C519	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C520	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C521	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C522	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C523	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C524	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C525	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C526	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C527	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C528	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C529	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C530	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C531	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C532	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C533	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C534	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C535	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C536	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C537	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C538	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C539	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C540	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C541	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C600	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C602	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C603	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C604	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C605	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C606	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C607	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C608	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C609	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C621	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C622	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C623	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C624	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C625	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C626	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C627	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C628	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C629	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C630	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C631	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C632	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C633	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C634	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C635	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C636	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C637	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C638	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C639	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C640	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C641	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C642	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C643	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C644	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C645	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C657	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C658	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C659	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C660	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C661	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C662	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C663	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C664	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C665	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C666	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C667	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C668	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C669	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C670	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C671	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C672	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C673	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C674	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C675	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C676	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C677	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C678	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C679	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C741	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C742	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C746	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C762	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C782	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C783	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C797	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C861	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C862	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C863	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C869	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C870	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C872	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C874	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C881	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C882	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C883	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C885	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C887	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C889	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C891	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C893	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C895	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C897	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C898	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C899	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C902	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C929	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C933	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C941	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C950	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1003	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1010	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1029	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1034	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1052	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1053	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1054	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1057	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1058	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1059	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1062	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1066	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1067	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1068	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1070	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1071	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1073	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1076	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1078	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1084	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1086	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1095	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1098	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1099	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1127	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1150	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1159	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1161	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1174	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1177	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1195	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1197	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1199	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1263	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1265	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1269	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1282	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1284	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1286	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1296	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1297	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1299	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1350	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1356	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1372	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1374	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1380	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1382	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1384	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1386	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1387	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1388	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1389	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1390	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1392	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1393	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1394	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1395	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1396	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1397	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1398	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1429	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1431	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1446	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1450	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1458	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1461	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1463	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1470	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1472	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1474	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1475	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1476	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1477	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1480	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1481	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1482	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1484	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1486	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1488	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1489	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1490	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1492	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1493	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1494	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1495	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1496	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1497	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1498	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1499	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1504	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1552	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1561	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1567	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1568	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1584	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1586	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1588	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1589	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1590	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1591	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1592	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1593	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1594	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1595	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1596	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1597	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1598	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1599	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1618	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1629	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1631	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1633	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1639	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1644	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1646	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1650	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1652	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1654	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1656	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1658	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1660	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1661	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1663	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1665	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1667	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1669	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1670	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1671	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1672	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1673	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1674	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1675	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1676	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1677	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1678	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1679	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1680	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1681	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1682	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1683	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1684	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1685	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1686	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1687	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1688	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1689	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1690	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1691	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1692	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1693	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1694	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1695	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1696	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1697	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1698	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1699	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1758	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1767	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1774	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1780	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1797	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1842	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1858	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1870	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1871	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1872	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1873	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1874	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1876	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1881	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1882	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1883	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1884	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1885	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1886	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1887	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1888	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1889	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1890	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1891	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1892	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1893	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1894	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1895	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1897	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1898	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1899	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1912	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1950	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1952	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1961	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1963	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1965	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1970	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1972	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1973	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1974	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1975	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1977	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1980	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1981	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1982	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1983	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1984	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1985	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1986	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1987	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1988	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1989	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1990	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1991	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1992	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1995	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1996	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1997	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1999	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2027	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2047	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2049	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2059	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2063	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2064	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2065	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2066	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2067	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2068	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2072	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2074	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2076	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2078	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2080	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2082	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2084	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2095	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2096	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2097	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2098	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2099	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2139	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2143	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2150	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2152	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2173	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2181	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2184	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2186	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2190	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2192	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2243	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2284	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2286	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2303	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2316	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2318	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2320	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2500	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2613	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2614	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2700	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2701	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2702	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2800	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2900	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2909	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2911	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2919	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3010	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3023	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3210	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3212	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3500	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3803	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C3804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3812	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C3813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3823	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C3900	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C3901	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C3902	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3904	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C3905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3907	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3928	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C3929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3933	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3939	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3941	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C3942	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3944	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3945	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4000	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4100	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C4200	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4201	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4204	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4205	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4206	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4207	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4233	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4237	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4246	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4250	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4263	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4264	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4265	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4266	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4267	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4268	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4269	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4270	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4271	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4272	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4278	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4280	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4282	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4283	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4284	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C4285	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C4286	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C4287	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C4288	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C4289	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4291	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4293	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4295	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4296	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4297	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4317	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4318	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4319	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4320	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4321	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4322	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4450	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4452	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4453	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4454	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4455	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4456	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4457	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4458	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4459	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4460	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4461	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4462	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4463	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4470	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4472	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4473	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4474	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4476	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4478	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4481	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4483	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4485	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4487	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4488	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4489	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4490	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4491	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4493	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4494	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4495	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4496	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4497	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4498	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4499	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4505	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4519	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4529	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4531	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4535	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4539	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4541	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4545	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4549	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4553	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4562	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4566	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4568	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4581	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4582	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4583	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4584	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4601	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4602	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4603	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4604	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4606	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4607	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4608	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4609	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4611	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4612	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4613	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4614	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4616	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4617	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4618	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4619	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4621	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4622	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4623	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4624	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4626	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4627	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4628	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4629	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4631	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4632	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4633	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4634	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4636	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4637	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4638	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4639	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4641	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4642	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4643	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4644	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4646	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4647	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4648	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4649	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4651	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4652	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4653	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4654	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4656	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4657	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4658	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4659	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4700	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4702	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4704	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4705	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4706	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4707	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4708	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4713	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4735	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4745	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4749	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4751	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4753	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4767	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4768	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4780	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4794	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4797	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4799	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4800	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4805	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4806	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4808	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4809	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C5000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5002	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5006	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5011	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5013	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5015	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5017	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5030	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5034	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5036	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5040	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5042	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5051	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5059	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5062	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5065	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5066	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5067	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5068	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5069	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5070	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5072	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5074	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5076	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5077	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5079	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5080	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5081	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5083	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5085	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5086	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5088	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5090	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5092	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5094	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5095	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5096	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5097	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5098	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5099	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5102	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5122	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5130	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5140	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5142	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5145	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5154	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5160	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5162	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5204	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5228	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5234	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5236	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5243	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5254	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5256	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5264	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5266	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5268	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5270	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5286	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5288	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5290	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5292	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5322	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5324	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5326	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5328	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5332	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5334	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5340	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5342	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5344	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5345	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5347	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5349	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5351	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5353	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5354	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5355	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5356	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5360	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5364	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5366	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN3500	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN3600	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN3601	1-564-013-11	o	PIN, CONNECTOR 3P
D1	8-719-064-52	s	DIODE CL-191YG-CD-T
D205	8-719-069-28	s	DIODE 1SS400TE-61
D206	8-719-074-31	s	DIODE CL-196YG-CD-T
D207	8-719-069-28	s	DIODE 1SS400TE-61
D300	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-074-31	s	DIODE CL-196YG-CD-T
D302	8-719-074-31	s	DIODE CL-196YG-CD-T
D303	8-719-074-31	s	DIODE CL-196YG-CD-T
D304	8-719-074-31	s	DIODE CL-196YG-CD-T
D2600	8-719-077-09	s	DIODE CL-196HR-CD-T
D2601	8-719-077-09	s	DIODE CL-196HR-CD-T
D2602	8-719-074-31	s	DIODE CL-196YG-CD-T
D2603	8-719-074-31	s	DIODE CL-196YG-CD-T
D2604	8-719-074-31	s	DIODE CL-196YG-CD-T
D3900	8-719-069-28	s	DIODE 1SS400TE-61
D3901	8-719-074-31	s	DIODE CL-196YG-CD-T
D3902	8-719-074-31	s	DIODE CL-196YG-CD-T
DD200	1-480-011-11	s	CONVERTER, DC-DC
DD201	1-480-011-11	s	CONVERTER, DC-DC
DD202	1-480-011-11	s	CONVERTER, DC-DC
DD203	1-480-011-11	s	CONVERTER, DC-DC
DD204	1-480-011-11	s	CONVERTER, DC-DC
E206	1-535-877-22	s	CHIP, CHECKER
E207	1-535-877-22	s	CHIP, CHECKER
E208	1-535-877-22	s	CHIP, CHECKER
E209	1-535-877-22	s	CHIP, CHECKER
E210	1-535-877-22	s	CHIP, CHECKER
E211	1-535-877-22	s	CHIP, CHECKER
E212	1-535-877-22	s	CHIP, CHECKER
E213	1-535-877-22	s	CHIP, CHECKER
E214	1-535-877-22	s	CHIP, CHECKER
E215	1-535-877-22	s	CHIP, CHECKER
E216	1-535-877-22	s	CHIP, CHECKER
E217	1-535-877-22	s	CHIP, CHECKER
E218	1-535-877-22	s	CHIP, CHECKER
E219	1-535-877-22	s	CHIP, CHECKER
E220	1-535-877-22	s	CHIP, CHECKER
E221	1-535-877-22	s	CHIP, CHECKER
E222	1-535-877-22	s	CHIP, CHECKER
E223	1-535-877-22	s	CHIP, CHECKER
E224	1-535-877-22	s	CHIP, CHECKER
E225	1-535-877-22	s	CHIP, CHECKER
E226	1-535-877-22	s	CHIP, CHECKER
F200	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F201	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1201	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1204	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1205	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1206	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB1207	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1208	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1209	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1210	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3800	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3900	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3901	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB3902	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4200	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4201	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4202	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FL1	1-239-899-21	s	FILTER, CHIP EMI
IC1	6-703-624-01	s	IC UPD72874GC-YEB
IC2	6-710-018-01	s	IC CAT24C02WI-GT3
IC200	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC201	6-708-324-01	s	IC R3112N301A-TR-FA
IC400	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC401	8-759-581-89	s	IC LM317SX
IC500	6-702-956-01	s	IC MC100LVEL17DWR2
IC501	6-702-956-01	s	IC MC100LVEL17DWR2
IC502	6-702-956-01	s	IC MC100LVEL17DWR2
IC503	8-759-338-95	s	IC NJM2903V(TE2)
IC504	8-759-338-95	s	IC NJM2903V(TE2)
IC505	8-759-338-95	s	IC NJM2903V(TE2)
IC600	6-702-535-01	s	IC MC100LVEL11DTR2
IC601	6-702-535-01	s	IC MC100LVEL11DTR2
IC602	6-702-535-01	s	IC MC100LVEL11DTR2
IC603	6-702-535-01	s	IC MC100LVEL11DTR2
IC604	6-702-535-01	s	IC MC100LVEL11DTR2
IC605	6-702-535-01	s	IC MC100LVEL11DTR2
IC606	6-702-535-01	s	IC MC100LVEL11DTR2
IC607	6-702-535-01	s	IC MC100LVEL11DTR2
IC608	6-702-535-01	s	IC MC100LVEL11DTR2
IC609	6-702-535-01	s	IC MC100LVEL11DTR2
IC1001	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1002	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1003	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1005	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1006	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1007	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1101	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1102	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1103	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1104	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1105	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1106	6-705-982-01	s	IC SN74SSTV16857DGGR
IC1201	6-705-981-01	s	IC CDCV857ADGGR
IC1202	6-705-981-01	s	IC CDCV857ADGGR
IC1203	6-705-981-01	s	IC CDCV857ADGGR
IC1204	6-705-981-01	s	IC CDCV857ADGGR
IC1205	6-705-981-01	s	IC CDCV857ADGGR
IC1206	6-705-981-01	s	IC CDCV857ADGGR
IC1207	6-705-981-01	s	IC CDCV857ADGGR
IC1208	6-705-981-01	s	IC CDCV857ADGGR
IC1209	6-705-981-01	s	IC CDCV857ADGGR
IC1210	6-705-981-01	s	IC CDCV857ADGGR
IC1301	6-709-708-01	s	IC MT46V32M16P-6T:F

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1302	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1303	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1304	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1305	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1306	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1307	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1308	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1309	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1310	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1401	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1402	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1403	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1404	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1405	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1406	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1407	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1408	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1409	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1410	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1501	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1502	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1503	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1504	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1505	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1506	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1507	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1508	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1509	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1510	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1601	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1602	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1603	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1604	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1605	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1606	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1607	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1608	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1609	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1610	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1701	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1702	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1703	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1704	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1705	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1706	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1707	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1708	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1709	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1710	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1801	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1802	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1803	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1804	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1805	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1806	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1807	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1808	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1809	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1810	6-709-708-01	s	IC MT46V32M16P-6T:F

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1901	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1902	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1903	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1904	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1905	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1906	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1907	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1908	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1909	6-709-708-01	s	IC MT46V32M16P-6T:F
IC1910	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2001	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2002	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2003	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2004	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2005	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2006	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2007	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2008	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2009	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2010	6-709-708-01	s	IC MT46V32M16P-6T:F
IC2300	8-759-639-86	s	IC SN65LVDS32DR
IC2301	6-709-646-01	s	IC TLC2933AIPWR
IC2302	8-759-639-85	s	IC SN65LVDS31DR
IC2303	8-759-388-62	s	IC NJU7062M(TE2)
IC2304	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2305	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2306	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2307	8-759-669-44	s	IC SN74LVC74APWR-12
IC2308	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2309	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2310	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2311	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2400	8-759-639-86	s	IC SN65LVDS32DR
IC2500	8-759-392-77	s	IC SN74LVC245APWR
IC2600	8-759-675-47	s	IC SN74LVC04APWR
IC2700	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2701	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2702	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2703	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2800	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2801	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2802	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2803	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2900	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2901	8-759-392-77	s	IC SN74LVC245APWR
IC2902	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2903	8-759-392-77	s	IC SN74LVC245APWR
IC3000	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3001	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3002	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3100	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3101	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3102	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3103	8-759-392-81	s	IC SN74LVC16245ADGGR
IC3200	8-759-392-77	s	IC SN74LVC245APWR
IC3201	8-759-392-77	s	IC SN74LVC245APWR
IC3202	8-759-658-44	s	IC DS92LV010ATMX
IC3203	8-759-392-77	s	IC SN74LVC245APWR
IC3500	8-759-392-77	s	IC SN74LVC245APWR

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC3501	8-759-392-77	s	IC SN74LVC245APWR
IC3602	8-759-392-77	s	IC SN74LVC245APWR
IC3605	6-710-018-01	s	IC CAT24C02WI-GT3
IC3606	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC3607	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3609	6-705-514-01	s	IC MAX3222IPWR
IC3801	6-705-039-01	s	IC 93LC46BT-I/SN
IC3802	8-759-669-44	s	IC SN74LVC74APWR-12
IC3803	8-759-675-47	s	IC SN74LVC04APWR
IC3902	6-700-398-01	s	IC UPC2918T-E1
IC3903	6-705-039-01	s	IC 93LC46BT-I/SN
IC4200	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4300	6-706-224-01	s	IC ADM1032ARMZ-R7
IC4401	6-703-449-01	s	IC LP2995MX
IC4402	6-703-449-01	s	IC LP2995MX
IC4403	6-703-449-01	s	IC LP2995MX
IC4404	6-703-449-01	s	IC LP2995MX
IC4405	6-703-449-01	s	IC LP2995MX
IC4406	6-703-449-01	s	IC LP2995MX
IC4407	6-703-449-01	s	IC LP2995MX
IC4408	6-703-449-01	s	IC LP2995MX
IC4409	6-703-449-01	s	IC LP2995MX
IC4410	6-703-449-01	s	IC LP2995MX
IC4411	6-703-449-01	s	IC LP2995MX
IC4412	6-703-449-01	s	IC LP2995MX
IC4500	6-706-224-01	s	IC ADM1032ARMZ-R7
L1	1-469-294-21	s	COIL, 1394 COMMON MODE
L2	1-469-294-21	s	COIL, 1394 COMMON MODE
L3	1-469-294-21	s	COIL, 1394 COMMON MODE
L500	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L501	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L502	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L503	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L504	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L505	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L506	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L507	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L508	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L509	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L510	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L511	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L512	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L513	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L514	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L515	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L516	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L517	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L518	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L519	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L520	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L521	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L522	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L523	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L2300	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L4200	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L4204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4207	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4300	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4305	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4306	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4307	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4308	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q200	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q300	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q301	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q302	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q303	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q304	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q305	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q306	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q307	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q308	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q309	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q2300	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2301	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2302	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R1	1-218-871-91	s	RES, CHIP 10K (1608)
R2	1-218-823-91	s	RES, CHIP 100 (1608)
R3	1-218-871-91	s	RES, CHIP 10K (1608)
R4	1-218-864-91	s	RES, CHIP 5.1K (1608)
R5	1-218-864-91	s	RES, CHIP 5.1K (1608)
R6	1-218-864-91	s	RES, CHIP 5.1K (1608)
R7	1-218-903-91	s	RES, CHIP 220K (1608)
R8	1-218-895-91	s	RES, CHIP 100K (1608)
R9	1-218-871-91	s	RES, CHIP 10K (1608)
R10	1-218-847-91	s	RES, CHIP 1.0K (1608)
R11	1-218-847-91	s	RES, CHIP 1.0K (1608)
R12	1-218-847-91	s	RES, CHIP 1.0K (1608)
R13	1-218-871-91	s	RES, CHIP 10K (1608)
R14	1-218-871-91	s	RES, CHIP 10K (1608)
R15	1-218-871-91	s	RES, CHIP 10K (1608)
R16	1-218-871-91	s	RES, CHIP 10K (1608)
R17	1-218-871-91	s	RES, CHIP 10K (1608)
R18	1-218-895-91	s	RES, CHIP 100K (1608)
R19	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R20	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R21	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R22	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R23	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R24	1-211-987-91	s	RES, CHIP 56 (1608)
R25	1-211-987-91	s	RES, CHIP 56 (1608)
R26	1-211-987-91	s	RES, CHIP 56 (1608)
R27	1-211-987-91	s	RES, CHIP 56 (1608)
R28	1-211-987-91	s	RES, CHIP 56 (1608)
R29	1-211-987-91	s	RES, CHIP 56 (1608)
R30	1-211-987-91	s	RES, CHIP 56 (1608)
R31	1-211-987-91	s	RES, CHIP 56 (1608)
R32	1-211-987-91	s	RES, CHIP 56 (1608)
R33	1-211-987-91	s	RES, CHIP 56 (1608)
R34	1-211-987-91	s	RES, CHIP 56 (1608)
R35	1-211-987-91	s	RES, CHIP 56 (1608)
R36	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R37	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R38	1-211-977-91	s	RES, CHIP 22 (1608)
R39	1-218-895-91	s	RES, CHIP 100K (1608)
R40	1-218-823-91	s	RES, CHIP 100 (1608)
R41	1-218-831-91	s	RES, CHIP 220 (1608)
R200	1-208-911-81	s	RES, CHIP 10K (1005)
R201	1-208-911-81	s	RES, CHIP 10K (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-887-81	s	RES, CHIP 1.0K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-208-919-81	s	RES, CHIP 22K (1005)
R209	1-208-919-81	s	RES, CHIP 22K (1005)
R210	1-208-895-81	s	RES, CHIP 2.2K (1005)
R211	1-208-911-81	s	RES, CHIP 10K (1005)
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-895-81	s	RES, CHIP 2.2K (1005)
R217	1-208-919-81	s	RES, CHIP 22K (1005)
R218	1-208-919-81	s	RES, CHIP 22K (1005)
R219	1-208-919-81	s	RES, CHIP 22K (1005)
R220	1-208-879-81	s	RES, CHIP 470 (1005)
R221	1-208-903-81	s	RES, CHIP 4.7K (1005)
R222	1-208-903-81	s	RES, CHIP 4.7K (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-903-81	s	RES, CHIP 4.7K (1005)
R225	1-208-903-81	s	RES, CHIP 4.7K (1005)
R226	1-208-927-81	s	RES, CHIP 47K (1005)
R227	1-208-943-81	s	RES, CHIP 220K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-935-81	s	RES, CHIP 100K (1005)
R230	1-208-903-81	s	RES, CHIP 4.7K (1005)
R231	1-208-895-81	s	RES, CHIP 2.2K (1005)
R232	1-208-887-81	s	RES, CHIP 1.0K (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-903-81	s	RES, CHIP 4.7K (1005)
R302	1-208-887-81	s	RES, CHIP 1.0K (1005)
R303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R304	1-208-911-81	s	RES, CHIP 10K (1005)
R305	1-208-935-81	s	RES, CHIP 100K (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R306	1-208-911-81	s	RES, CHIP 10K (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R308	1-208-895-81	s	RES, CHIP 2.2K (1005)
R309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R310	1-208-911-81	s	RES, CHIP 10K (1005)
R311	1-208-935-81	s	RES, CHIP 100K (1005)
R312	1-208-911-81	s	RES, CHIP 10K (1005)
R313	1-208-903-81	s	RES, CHIP 4.7K (1005)
R314	1-208-895-81	s	RES, CHIP 2.2K (1005)
R315	1-208-911-81	s	RES, CHIP 10K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-911-81	s	RES, CHIP 10K (1005)
R318	1-208-935-81	s	RES, CHIP 100K (1005)
R319	1-208-911-81	s	RES, CHIP 10K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-895-81	s	RES, CHIP 2.2K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-903-81	s	RES, CHIP 4.7K (1005)
R324	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-935-81	s	RES, CHIP 100K (1005)
R326	1-208-911-81	s	RES, CHIP 10K (1005)
R327	1-208-903-81	s	RES, CHIP 4.7K (1005)
R328	1-208-895-81	s	RES, CHIP 2.2K (1005)
R329	1-208-919-81	s	RES, CHIP 22K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-935-81	s	RES, CHIP 100K (1005)
R332	1-208-911-81	s	RES, CHIP 10K (1005)
R333	1-208-903-81	s	RES, CHIP 4.7K (1005)
R334	1-208-895-81	s	RES, CHIP 2.2K (1005)
R400	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-879-81	s	RES, CHIP 470 (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R404	1-208-895-81	s	RES, CHIP 2.2K (1005)
R500	1-208-855-81	s	RES, CHIP 47 (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-208-855-81	s	RES, CHIP 47 (1005)
R506	1-208-855-81	s	RES, CHIP 47 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R509	1-208-855-81	s	RES, CHIP 47 (1005)
R510	1-208-855-81	s	RES, CHIP 47 (1005)
R511	1-208-855-81	s	RES, CHIP 47 (1005)
R512	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-208-855-81	s	RES, CHIP 47 (1005)
R514	1-208-855-81	s	RES, CHIP 47 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-871-81	s	RES, CHIP 220 (1005)
R517	1-208-871-81	s	RES, CHIP 220 (1005)
R518	1-208-871-81	s	RES, CHIP 220 (1005)
R519	1-208-871-81	s	RES, CHIP 220 (1005)
R520	1-208-871-81	s	RES, CHIP 220 (1005)
R521	1-208-871-81	s	RES, CHIP 220 (1005)
R522	1-208-871-81	s	RES, CHIP 220 (1005)
R523	1-208-871-81	s	RES, CHIP 220 (1005)
R524	1-208-871-81	s	RES, CHIP 220 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R525	1-208-871-81	s	RES, CHIP 220 (1005)
R526	1-208-871-81	s	RES, CHIP 220 (1005)
R527	1-208-871-81	s	RES, CHIP 220 (1005)
R528	1-208-871-81	s	RES, CHIP 220 (1005)
R529	1-208-871-81	s	RES, CHIP 220 (1005)
R530	1-208-871-81	s	RES, CHIP 220 (1005)
R531	1-208-871-81	s	RES, CHIP 220 (1005)
R532	1-220-878-81	s	RES, CHIP 22 (1005)
R533	1-220-878-81	s	RES, CHIP 22 (1005)
R534	1-220-878-81	s	RES, CHIP 22 (1005)
R535	1-220-878-81	s	RES, CHIP 22 (1005)
R536	1-220-878-81	s	RES, CHIP 22 (1005)
R537	1-220-878-81	s	RES, CHIP 22 (1005)
R538	1-220-878-81	s	RES, CHIP 22 (1005)
R539	1-220-878-81	s	RES, CHIP 22 (1005)
R540	1-220-878-81	s	RES, CHIP 22 (1005)
R541	1-220-878-81	s	RES, CHIP 22 (1005)
R542	1-220-878-81	s	RES, CHIP 22 (1005)
R543	1-220-878-81	s	RES, CHIP 22 (1005)
R544	1-220-878-81	s	RES, CHIP 22 (1005)
R545	1-220-878-81	s	RES, CHIP 22 (1005)
R546	1-220-878-81	s	RES, CHIP 22 (1005)
R547	1-220-878-81	s	RES, CHIP 22 (1005)
R548	1-208-855-81	s	RES, CHIP 47 (1005)
R549	1-208-855-81	s	RES, CHIP 47 (1005)
R550	1-208-855-81	s	RES, CHIP 47 (1005)
R551	1-208-855-81	s	RES, CHIP 47 (1005)
R552	1-208-855-81	s	RES, CHIP 47 (1005)
R553	1-208-855-81	s	RES, CHIP 47 (1005)
R554	1-208-855-81	s	RES, CHIP 47 (1005)
R555	1-208-855-81	s	RES, CHIP 47 (1005)
R556	1-208-871-81	s	RES, CHIP 220 (1005)
R557	1-208-871-81	s	RES, CHIP 220 (1005)
R558	1-208-871-81	s	RES, CHIP 220 (1005)
R559	1-208-871-81	s	RES, CHIP 220 (1005)
R560	1-208-871-81	s	RES, CHIP 220 (1005)
R561	1-208-871-81	s	RES, CHIP 220 (1005)
R562	1-208-871-81	s	RES, CHIP 220 (1005)
R563	1-208-871-81	s	RES, CHIP 220 (1005)
R564	1-220-878-81	s	RES, CHIP 22 (1005)
R565	1-220-878-81	s	RES, CHIP 22 (1005)
R566	1-220-878-81	s	RES, CHIP 22 (1005)
R567	1-220-878-81	s	RES, CHIP 22 (1005)
R568	1-220-878-81	s	RES, CHIP 22 (1005)
R569	1-220-878-81	s	RES, CHIP 22 (1005)
R570	1-220-878-81	s	RES, CHIP 22 (1005)
R571	1-220-878-81	s	RES, CHIP 22 (1005)
R600	1-208-863-81	s	RES, CHIP 100 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-208-855-81	s	RES, CHIP 47 (1005)
R603	1-208-855-81	s	RES, CHIP 47 (1005)
R604	1-208-855-81	s	RES, CHIP 47 (1005)
R605	1-208-855-81	s	RES, CHIP 47 (1005)
R606	1-208-855-81	s	RES, CHIP 47 (1005)
R607	1-208-919-81	s	RES, CHIP 22K (1005)
R608	1-208-855-81	s	RES, CHIP 47 (1005)
R609	1-208-919-81	s	RES, CHIP 22K (1005)
R610	1-208-855-81	s	RES, CHIP 47 (1005)
R611	1-208-919-81	s	RES, CHIP 22K (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R612	1-208-855-81	s	RES, CHIP 47 (1005)
R613	1-208-919-81	s	RES, CHIP 22K (1005)
R614	1-208-855-81	s	RES, CHIP 47 (1005)
R615	1-208-919-81	s	RES, CHIP 22K (1005)
R616	1-208-855-81	s	RES, CHIP 47 (1005)
R617	1-208-875-81	s	RES, CHIP 330 (1005)
R618	1-208-875-81	s	RES, CHIP 330 (1005)
R619	1-208-875-81	s	RES, CHIP 330 (1005)
R620	1-208-875-81	s	RES, CHIP 330 (1005)
R621	1-208-875-81	s	RES, CHIP 330 (1005)
R622	1-208-875-81	s	RES, CHIP 330 (1005)
R623	1-208-875-81	s	RES, CHIP 330 (1005)
R624	1-208-875-81	s	RES, CHIP 330 (1005)
R625	1-208-875-81	s	RES, CHIP 330 (1005)
R626	1-208-875-81	s	RES, CHIP 330 (1005)
R627	1-208-875-81	s	RES, CHIP 330 (1005)
R628	1-208-875-81	s	RES, CHIP 330 (1005)
R629	1-208-875-81	s	RES, CHIP 330 (1005)
R630	1-208-875-81	s	RES, CHIP 330 (1005)
R631	1-208-875-81	s	RES, CHIP 330 (1005)
R632	1-208-875-81	s	RES, CHIP 330 (1005)
R633	1-208-875-81	s	RES, CHIP 330 (1005)
R634	1-208-875-81	s	RES, CHIP 330 (1005)
R635	1-208-875-81	s	RES, CHIP 330 (1005)
R636	1-208-875-81	s	RES, CHIP 330 (1005)
R637	1-220-878-81	s	RES, CHIP 22 (1005)
R638	1-220-878-81	s	RES, CHIP 22 (1005)
R639	1-220-878-81	s	RES, CHIP 22 (1005)
R640	1-220-878-81	s	RES, CHIP 22 (1005)
R641	1-220-878-81	s	RES, CHIP 22 (1005)
R642	1-220-878-81	s	RES, CHIP 22 (1005)
R643	1-220-878-81	s	RES, CHIP 22 (1005)
R644	1-220-878-81	s	RES, CHIP 22 (1005)
R645	1-220-878-81	s	RES, CHIP 22 (1005)
R646	1-220-878-81	s	RES, CHIP 22 (1005)
R647	1-220-878-81	s	RES, CHIP 22 (1005)
R648	1-220-878-81	s	RES, CHIP 22 (1005)
R649	1-220-878-81	s	RES, CHIP 22 (1005)
R650	1-220-878-81	s	RES, CHIP 22 (1005)
R651	1-220-878-81	s	RES, CHIP 22 (1005)
R652	1-220-878-81	s	RES, CHIP 22 (1005)
R653	1-220-878-81	s	RES, CHIP 22 (1005)
R654	1-220-878-81	s	RES, CHIP 22 (1005)
R655	1-220-878-81	s	RES, CHIP 22 (1005)
R656	1-220-878-81	s	RES, CHIP 22 (1005)
R657	1-208-855-81	s	RES, CHIP 47 (1005)
R658	1-208-855-81	s	RES, CHIP 47 (1005)
R659	1-208-855-81	s	RES, CHIP 47 (1005)
R660	1-208-855-81	s	RES, CHIP 47 (1005)
R661	1-208-855-81	s	RES, CHIP 47 (1005)
R662	1-208-919-81	s	RES, CHIP 22K (1005)
R663	1-208-855-81	s	RES, CHIP 47 (1005)
R664	1-208-919-81	s	RES, CHIP 22K (1005)
R665	1-208-855-81	s	RES, CHIP 47 (1005)
R666	1-208-919-81	s	RES, CHIP 22K (1005)
R667	1-208-855-81	s	RES, CHIP 47 (1005)
R668	1-208-855-81	s	RES, CHIP 47 (1005)
R669	1-208-855-81	s	RES, CHIP 47 (1005)
R670	1-208-875-81	s	RES, CHIP 330 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R671	1-208-875-81	s	RES, CHIP 330 (1005)
R672	1-208-875-81	s	RES, CHIP 330 (1005)
R673	1-208-875-81	s	RES, CHIP 330 (1005)
R674	1-208-875-81	s	RES, CHIP 330 (1005)
R675	1-208-875-81	s	RES, CHIP 330 (1005)
R676	1-208-875-81	s	RES, CHIP 330 (1005)
R677	1-208-875-81	s	RES, CHIP 330 (1005)
R678	1-208-875-81	s	RES, CHIP 330 (1005)
R679	1-208-875-81	s	RES, CHIP 330 (1005)
R680	1-208-875-81	s	RES, CHIP 330 (1005)
R681	1-208-875-81	s	RES, CHIP 330 (1005)
R682	1-208-875-81	s	RES, CHIP 330 (1005)
R683	1-208-875-81	s	RES, CHIP 330 (1005)
R684	1-208-875-81	s	RES, CHIP 330 (1005)
R685	1-208-875-81	s	RES, CHIP 330 (1005)
R686	1-208-875-81	s	RES, CHIP 330 (1005)
R687	1-208-875-81	s	RES, CHIP 330 (1005)
R688	1-208-875-81	s	RES, CHIP 330 (1005)
R689	1-208-875-81	s	RES, CHIP 330 (1005)
R690	1-220-878-81	s	RES, CHIP 22 (1005)
R691	1-220-878-81	s	RES, CHIP 22 (1005)
R692	1-220-878-81	s	RES, CHIP 22 (1005)
R693	1-220-878-81	s	RES, CHIP 22 (1005)
R694	1-220-878-81	s	RES, CHIP 22 (1005)
R695	1-220-878-81	s	RES, CHIP 22 (1005)
R696	1-220-878-81	s	RES, CHIP 22 (1005)
R697	1-220-878-81	s	RES, CHIP 22 (1005)
R698	1-220-878-81	s	RES, CHIP 22 (1005)
R699	1-220-878-81	s	RES, CHIP 22 (1005)
R700	1-220-878-81	s	RES, CHIP 22 (1005)
R701	1-220-878-81	s	RES, CHIP 22 (1005)
R702	1-220-878-81	s	RES, CHIP 22 (1005)
R703	1-220-878-81	s	RES, CHIP 22 (1005)
R704	1-220-878-81	s	RES, CHIP 22 (1005)
R705	1-220-878-81	s	RES, CHIP 22 (1005)
R706	1-220-878-81	s	RES, CHIP 22 (1005)
R707	1-220-878-81	s	RES, CHIP 22 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R709	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-208-919-81	s	RES, CHIP 22K (1005)
R711	1-208-919-81	s	RES, CHIP 22K (1005)
R750	1-208-863-81	s	RES, CHIP 100 (1005)
R752	1-208-863-81	s	RES, CHIP 100 (1005)
R754	1-208-887-81	s	RES, CHIP 1.0K (1005)
R757	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R801	1-208-911-81	s	RES, CHIP 10K (1005)
R802	1-208-865-81	s	RES, CHIP 120 (1005)
R803	1-208-911-81	s	RES, CHIP 10K (1005)
R804	1-208-865-81	s	RES, CHIP 120 (1005)
R805	1-208-911-81	s	RES, CHIP 10K (1005)
R806	1-208-865-81	s	RES, CHIP 120 (1005)
R807	1-208-911-81	s	RES, CHIP 10K (1005)
R808	1-208-911-81	s	RES, CHIP 10K (1005)
R809	1-208-865-81	s	RES, CHIP 120 (1005)
R810	1-208-865-81	s	RES, CHIP 120 (1005)
R811	1-208-911-81	s	RES, CHIP 10K (1005)
R812	1-208-865-81	s	RES, CHIP 120 (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-865-81	s	RES, CHIP 120 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R903	1-208-911-81	s	RES, CHIP 10K (1005)
R904	1-208-865-81	s	RES, CHIP 120 (1005)
R905	1-208-911-81	s	RES, CHIP 10K (1005)
R906	1-208-865-81	s	RES, CHIP 120 (1005)
R907	1-208-911-81	s	RES, CHIP 10K (1005)
R908	1-208-911-81	s	RES, CHIP 10K (1005)
R909	1-208-865-81	s	RES, CHIP 120 (1005)
R910	1-208-865-81	s	RES, CHIP 120 (1005)
R911	1-208-911-81	s	RES, CHIP 10K (1005)
R912	1-208-865-81	s	RES, CHIP 120 (1005)
R1000	1-208-911-81	s	RES, CHIP 10K (1005)
R1001	1-208-935-81	s	RES, CHIP 100K (1005)
R1002	1-208-865-81	s	RES, CHIP 120 (1005)
R1003	1-208-865-81	s	RES, CHIP 120 (1005)
R1004	1-208-935-81	s	RES, CHIP 100K (1005)
R1005	1-208-865-81	s	RES, CHIP 120 (1005)
R1006	1-208-911-81	s	RES, CHIP 10K (1005)
R1007	1-208-865-81	s	RES, CHIP 120 (1005)
R1008	1-220-870-81	s	RES, CHIP 10 (1005)
R1009	1-220-870-81	s	RES, CHIP 10 (1005)
R1010	1-220-870-81	s	RES, CHIP 10 (1005)
R1011	1-220-870-81	s	RES, CHIP 10 (1005)
R1012	1-220-870-81	s	RES, CHIP 10 (1005)
R1013	1-220-870-81	s	RES, CHIP 10 (1005)
R1014	1-220-870-81	s	RES, CHIP 10 (1005)
R1015	1-220-870-81	s	RES, CHIP 10 (1005)
R1016	1-220-870-81	s	RES, CHIP 10 (1005)
R1017	1-220-870-81	s	RES, CHIP 10 (1005)
R1018	1-220-870-81	s	RES, CHIP 10 (1005)
R1019	1-220-870-81	s	RES, CHIP 10 (1005)
R1020	1-220-870-81	s	RES, CHIP 10 (1005)
R1021	1-220-870-81	s	RES, CHIP 10 (1005)
R1022	1-220-870-81	s	RES, CHIP 10 (1005)
R1023	1-220-870-81	s	RES, CHIP 10 (1005)
R1024	1-220-870-81	s	RES, CHIP 10 (1005)
R1025	1-220-870-81	s	RES, CHIP 10 (1005)
R1026	1-220-870-81	s	RES, CHIP 10 (1005)
R1027	1-220-870-81	s	RES, CHIP 10 (1005)
R1028	1-220-870-81	s	RES, CHIP 10 (1005)
R1029	1-220-870-81	s	RES, CHIP 10 (1005)
R1030	1-220-870-81	s	RES, CHIP 10 (1005)
R1031	1-220-870-81	s	RES, CHIP 10 (1005)
R1032	1-220-870-81	s	RES, CHIP 10 (1005)
R1033	1-220-870-81	s	RES, CHIP 10 (1005)
R1034	1-220-870-81	s	RES, CHIP 10 (1005)
R1035	1-220-870-81	s	RES, CHIP 10 (1005)
R1036	1-220-870-81	s	RES, CHIP 10 (1005)
R1037	1-220-870-81	s	RES, CHIP 10 (1005)
R1038	1-220-870-81	s	RES, CHIP 10 (1005)
R1039	1-220-870-81	s	RES, CHIP 10 (1005)
R1040	1-220-870-81	s	RES, CHIP 10 (1005)
R1041	1-220-870-81	s	RES, CHIP 10 (1005)
R1042	1-220-870-81	s	RES, CHIP 10 (1005)
R1043	1-220-870-81	s	RES, CHIP 10 (1005)
R1044	1-220-870-81	s	RES, CHIP 10 (1005)
R1045	1-220-870-81	s	RES, CHIP 10 (1005)
R1046	1-220-870-81	s	RES, CHIP 10 (1005)
R1047	1-220-870-81	s	RES, CHIP 10 (1005)
R1048	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1049	1-208-865-81	s	RES, CHIP 120 (1005)
R1050	1-208-865-81	s	RES, CHIP 120 (1005)
R1051	1-208-865-81	s	RES, CHIP 120 (1005)
R1052	1-208-911-81	s	RES, CHIP 10K (1005)
R1053	1-208-865-81	s	RES, CHIP 120 (1005)
R1054	1-208-935-81	s	RES, CHIP 100K (1005)
R1055	1-208-935-81	s	RES, CHIP 100K (1005)
R1056	1-220-870-81	s	RES, CHIP 10 (1005)
R1057	1-220-870-81	s	RES, CHIP 10 (1005)
R1058	1-220-870-81	s	RES, CHIP 10 (1005)
R1059	1-220-870-81	s	RES, CHIP 10 (1005)
R1060	1-220-870-81	s	RES, CHIP 10 (1005)
R1061	1-220-870-81	s	RES, CHIP 10 (1005)
R1062	1-220-870-81	s	RES, CHIP 10 (1005)
R1063	1-220-870-81	s	RES, CHIP 10 (1005)
R1064	1-220-870-81	s	RES, CHIP 10 (1005)
R1065	1-220-870-81	s	RES, CHIP 10 (1005)
R1066	1-220-870-81	s	RES, CHIP 10 (1005)
R1067	1-220-870-81	s	RES, CHIP 10 (1005)
R1068	1-220-870-81	s	RES, CHIP 10 (1005)
R1069	1-220-870-81	s	RES, CHIP 10 (1005)
R1070	1-220-870-81	s	RES, CHIP 10 (1005)
R1071	1-220-870-81	s	RES, CHIP 10 (1005)
R1072	1-220-870-81	s	RES, CHIP 10 (1005)
R1073	1-220-870-81	s	RES, CHIP 10 (1005)
R1074	1-220-870-81	s	RES, CHIP 10 (1005)
R1075	1-220-870-81	s	RES, CHIP 10 (1005)
R1076	1-220-870-81	s	RES, CHIP 10 (1005)
R1077	1-220-870-81	s	RES, CHIP 10 (1005)
R1078	1-220-870-81	s	RES, CHIP 10 (1005)
R1079	1-220-870-81	s	RES, CHIP 10 (1005)
R1080	1-220-870-81	s	RES, CHIP 10 (1005)
R1081	1-220-870-81	s	RES, CHIP 10 (1005)
R1082	1-220-870-81	s	RES, CHIP 10 (1005)
R1083	1-220-870-81	s	RES, CHIP 10 (1005)
R1084	1-220-870-81	s	RES, CHIP 10 (1005)
R1085	1-220-870-81	s	RES, CHIP 10 (1005)
R1086	1-220-870-81	s	RES, CHIP 10 (1005)
R1087	1-220-870-81	s	RES, CHIP 10 (1005)
R1088	1-220-870-81	s	RES, CHIP 10 (1005)
R1089	1-220-870-81	s	RES, CHIP 10 (1005)
R1090	1-220-870-81	s	RES, CHIP 10 (1005)
R1091	1-220-870-81	s	RES, CHIP 10 (1005)
R1092	1-220-870-81	s	RES, CHIP 10 (1005)
R1093	1-220-870-81	s	RES, CHIP 10 (1005)
R1094	1-220-870-81	s	RES, CHIP 10 (1005)
R1095	1-220-870-81	s	RES, CHIP 10 (1005)
R1096	1-208-911-81	s	RES, CHIP 10K (1005)
R1097	1-208-935-81	s	RES, CHIP 100K (1005)
R1098	1-208-865-81	s	RES, CHIP 120 (1005)
R1099	1-208-865-81	s	RES, CHIP 120 (1005)
R1100	1-208-935-81	s	RES, CHIP 100K (1005)
R1101	1-208-865-81	s	RES, CHIP 120 (1005)
R1102	1-208-911-81	s	RES, CHIP 10K (1005)
R1103	1-208-865-81	s	RES, CHIP 120 (1005)
R1104	1-220-870-81	s	RES, CHIP 10 (1005)
R1105	1-220-870-81	s	RES, CHIP 10 (1005)
R1106	1-220-870-81	s	RES, CHIP 10 (1005)
R1107	1-220-870-81	s	RES, CHIP 10 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1108	1-220-870-81	s	RES, CHIP 10 (1005)
R1109	1-220-870-81	s	RES, CHIP 10 (1005)
R1110	1-220-870-81	s	RES, CHIP 10 (1005)
R1111	1-220-870-81	s	RES, CHIP 10 (1005)
R1112	1-220-870-81	s	RES, CHIP 10 (1005)
R1113	1-220-870-81	s	RES, CHIP 10 (1005)
R1114	1-220-870-81	s	RES, CHIP 10 (1005)
R1115	1-220-870-81	s	RES, CHIP 10 (1005)
R1116	1-220-870-81	s	RES, CHIP 10 (1005)
R1117	1-220-870-81	s	RES, CHIP 10 (1005)
R1118	1-220-870-81	s	RES, CHIP 10 (1005)
R1119	1-220-870-81	s	RES, CHIP 10 (1005)
R1120	1-220-870-81	s	RES, CHIP 10 (1005)
R1121	1-220-870-81	s	RES, CHIP 10 (1005)
R1122	1-220-870-81	s	RES, CHIP 10 (1005)
R1123	1-220-870-81	s	RES, CHIP 10 (1005)
R1124	1-220-870-81	s	RES, CHIP 10 (1005)
R1125	1-220-870-81	s	RES, CHIP 10 (1005)
R1126	1-220-870-81	s	RES, CHIP 10 (1005)
R1127	1-220-870-81	s	RES, CHIP 10 (1005)
R1128	1-220-870-81	s	RES, CHIP 10 (1005)
R1129	1-220-870-81	s	RES, CHIP 10 (1005)
R1130	1-220-870-81	s	RES, CHIP 10 (1005)
R1131	1-220-870-81	s	RES, CHIP 10 (1005)
R1132	1-220-870-81	s	RES, CHIP 10 (1005)
R1133	1-220-870-81	s	RES, CHIP 10 (1005)
R1134	1-220-870-81	s	RES, CHIP 10 (1005)
R1135	1-220-870-81	s	RES, CHIP 10 (1005)
R1136	1-220-870-81	s	RES, CHIP 10 (1005)
R1137	1-220-870-81	s	RES, CHIP 10 (1005)
R1138	1-220-870-81	s	RES, CHIP 10 (1005)
R1139	1-220-870-81	s	RES, CHIP 10 (1005)
R1140	1-220-870-81	s	RES, CHIP 10 (1005)
R1141	1-220-870-81	s	RES, CHIP 10 (1005)
R1142	1-220-870-81	s	RES, CHIP 10 (1005)
R1143	1-220-870-81	s	RES, CHIP 10 (1005)
R1144	1-208-911-81	s	RES, CHIP 10K (1005)
R1145	1-208-935-81	s	RES, CHIP 100K (1005)
R1146	1-208-865-81	s	RES, CHIP 120 (1005)
R1147	1-208-865-81	s	RES, CHIP 120 (1005)
R1148	1-208-935-81	s	RES, CHIP 100K (1005)
R1149	1-208-865-81	s	RES, CHIP 120 (1005)
R1150	1-208-911-81	s	RES, CHIP 10K (1005)
R1151	1-208-865-81	s	RES, CHIP 120 (1005)
R1152	1-220-870-81	s	RES, CHIP 10 (1005)
R1153	1-220-870-81	s	RES, CHIP 10 (1005)
R1154	1-220-870-81	s	RES, CHIP 10 (1005)
R1155	1-220-870-81	s	RES, CHIP 10 (1005)
R1156	1-220-870-81	s	RES, CHIP 10 (1005)
R1157	1-220-870-81	s	RES, CHIP 10 (1005)
R1158	1-220-870-81	s	RES, CHIP 10 (1005)
R1159	1-220-870-81	s	RES, CHIP 10 (1005)
R1160	1-220-870-81	s	RES, CHIP 10 (1005)
R1161	1-220-870-81	s	RES, CHIP 10 (1005)
R1162	1-220-870-81	s	RES, CHIP 10 (1005)
R1163	1-220-870-81	s	RES, CHIP 10 (1005)
R1164	1-220-870-81	s	RES, CHIP 10 (1005)
R1165	1-220-870-81	s	RES, CHIP 10 (1005)
R1166	1-220-870-81	s	RES, CHIP 10 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1167	1-220-870-81	s	RES, CHIP 10 (1005)
R1168	1-220-870-81	s	RES, CHIP 10 (1005)
R1169	1-220-870-81	s	RES, CHIP 10 (1005)
R1170	1-220-870-81	s	RES, CHIP 10 (1005)
R1171	1-220-870-81	s	RES, CHIP 10 (1005)
R1172	1-220-870-81	s	RES, CHIP 10 (1005)
R1173	1-220-870-81	s	RES, CHIP 10 (1005)
R1174	1-220-870-81	s	RES, CHIP 10 (1005)
R1175	1-220-870-81	s	RES, CHIP 10 (1005)
R1176	1-220-870-81	s	RES, CHIP 10 (1005)
R1177	1-220-870-81	s	RES, CHIP 10 (1005)
R1178	1-220-870-81	s	RES, CHIP 10 (1005)
R1179	1-220-870-81	s	RES, CHIP 10 (1005)
R1180	1-220-870-81	s	RES, CHIP 10 (1005)
R1181	1-220-870-81	s	RES, CHIP 10 (1005)
R1182	1-220-870-81	s	RES, CHIP 10 (1005)
R1183	1-220-870-81	s	RES, CHIP 10 (1005)
R1184	1-220-870-81	s	RES, CHIP 10 (1005)
R1185	1-220-870-81	s	RES, CHIP 10 (1005)
R1186	1-220-870-81	s	RES, CHIP 10 (1005)
R1187	1-220-870-81	s	RES, CHIP 10 (1005)
R1188	1-220-870-81	s	RES, CHIP 10 (1005)
R1189	1-220-870-81	s	RES, CHIP 10 (1005)
R1190	1-220-870-81	s	RES, CHIP 10 (1005)
R1191	1-220-870-81	s	RES, CHIP 10 (1005)
R1192	1-208-911-81	s	RES, CHIP 10K (1005)
R1193	1-208-935-81	s	RES, CHIP 100K (1005)
R1195	1-208-865-81	s	RES, CHIP 120 (1005)
R1196	1-208-935-81	s	RES, CHIP 100K (1005)
R1198	1-208-911-81	s	RES, CHIP 10K (1005)
R1199	1-208-865-81	s	RES, CHIP 120 (1005)
R1200	1-220-870-81	s	RES, CHIP 10 (1005)
R1201	1-220-870-81	s	RES, CHIP 10 (1005)
R1202	1-220-870-81	s	RES, CHIP 10 (1005)
R1203	1-220-870-81	s	RES, CHIP 10 (1005)
R1204	1-220-870-81	s	RES, CHIP 10 (1005)
R1205	1-220-870-81	s	RES, CHIP 10 (1005)
R1206	1-220-870-81	s	RES, CHIP 10 (1005)
R1207	1-220-870-81	s	RES, CHIP 10 (1005)
R1208	1-220-870-81	s	RES, CHIP 10 (1005)
R1209	1-220-870-81	s	RES, CHIP 10 (1005)
R1210	1-220-870-81	s	RES, CHIP 10 (1005)
R1211	1-220-870-81	s	RES, CHIP 10 (1005)
R1212	1-220-870-81	s	RES, CHIP 10 (1005)
R1213	1-220-870-81	s	RES, CHIP 10 (1005)
R1214	1-220-870-81	s	RES, CHIP 10 (1005)
R1215	1-220-870-81	s	RES, CHIP 10 (1005)
R1216	1-220-870-81	s	RES, CHIP 10 (1005)
R1217	1-220-870-81	s	RES, CHIP 10 (1005)
R1218	1-220-870-81	s	RES, CHIP 10 (1005)
R1219	1-220-870-81	s	RES, CHIP 10 (1005)
R1220	1-220-870-81	s	RES, CHIP 10 (1005)
R1221	1-220-870-81	s	RES, CHIP 10 (1005)
R1222	1-220-870-81	s	RES, CHIP 10 (1005)
R1223	1-220-870-81	s	RES, CHIP 10 (1005)
R1224	1-220-870-81	s	RES, CHIP 10 (1005)
R1225	1-220-870-81	s	RES, CHIP 10 (1005)
R1226	1-220-870-81	s	RES, CHIP 10 (1005)
R1227	1-220-870-81	s	RES, CHIP 10 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1228	1-220-870-81	s	RES, CHIP 10 (1005)
R1229	1-220-870-81	s	RES, CHIP 10 (1005)
R1230	1-220-870-81	s	RES, CHIP 10 (1005)
R1231	1-220-870-81	s	RES, CHIP 10 (1005)
R1232	1-220-870-81	s	RES, CHIP 10 (1005)
R1233	1-220-870-81	s	RES, CHIP 10 (1005)
R1234	1-220-870-81	s	RES, CHIP 10 (1005)
R1235	1-220-870-81	s	RES, CHIP 10 (1005)
R1236	1-220-870-81	s	RES, CHIP 10 (1005)
R1237	1-220-870-81	s	RES, CHIP 10 (1005)
R1238	1-220-870-81	s	RES, CHIP 10 (1005)
R1239	1-220-870-81	s	RES, CHIP 10 (1005)
R1240	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1241	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1242	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1301	1-208-865-81	s	RES, CHIP 120 (1005)
R1302	1-208-865-81	s	RES, CHIP 120 (1005)
R1303	1-208-865-81	s	RES, CHIP 120 (1005)
R1304	1-208-865-81	s	RES, CHIP 120 (1005)
R1305	1-208-865-81	s	RES, CHIP 120 (1005)
R1306	1-208-865-81	s	RES, CHIP 120 (1005)
R1307	1-208-865-81	s	RES, CHIP 120 (1005)
R1308	1-208-865-81	s	RES, CHIP 120 (1005)
R1309	1-208-865-81	s	RES, CHIP 120 (1005)
R1310	1-208-865-81	s	RES, CHIP 120 (1005)
R1401	1-208-865-81	s	RES, CHIP 120 (1005)
R1402	1-208-865-81	s	RES, CHIP 120 (1005)
R1403	1-208-865-81	s	RES, CHIP 120 (1005)
R1404	1-208-865-81	s	RES, CHIP 120 (1005)
R1405	1-208-865-81	s	RES, CHIP 120 (1005)
R1406	1-208-865-81	s	RES, CHIP 120 (1005)
R1407	1-208-865-81	s	RES, CHIP 120 (1005)
R1408	1-208-865-81	s	RES, CHIP 120 (1005)
R1409	1-208-865-81	s	RES, CHIP 120 (1005)
R1410	1-208-865-81	s	RES, CHIP 120 (1005)
R1501	1-208-865-81	s	RES, CHIP 120 (1005)
R1502	1-208-865-81	s	RES, CHIP 120 (1005)
R1503	1-208-865-81	s	RES, CHIP 120 (1005)
R1504	1-208-865-81	s	RES, CHIP 120 (1005)
R1505	1-208-865-81	s	RES, CHIP 120 (1005)
R1506	1-208-865-81	s	RES, CHIP 120 (1005)
R1507	1-208-865-81	s	RES, CHIP 120 (1005)
R1508	1-208-865-81	s	RES, CHIP 120 (1005)
R1509	1-208-865-81	s	RES, CHIP 120 (1005)
R1510	1-208-865-81	s	RES, CHIP 120 (1005)
R1601	1-208-865-81	s	RES, CHIP 120 (1005)
R1602	1-208-865-81	s	RES, CHIP 120 (1005)
R1603	1-208-865-81	s	RES, CHIP 120 (1005)
R1604	1-208-865-81	s	RES, CHIP 120 (1005)
R1605	1-208-865-81	s	RES, CHIP 120 (1005)
R1606	1-208-865-81	s	RES, CHIP 120 (1005)
R1607	1-208-865-81	s	RES, CHIP 120 (1005)
R1608	1-208-865-81	s	RES, CHIP 120 (1005)
R1609	1-208-865-81	s	RES, CHIP 120 (1005)
R1610	1-208-865-81	s	RES, CHIP 120 (1005)
R1701	1-208-865-81	s	RES, CHIP 120 (1005)
R1702	1-208-865-81	s	RES, CHIP 120 (1005)
R1703	1-208-865-81	s	RES, CHIP 120 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1704	1-208-865-81	s	RES, CHIP 120 (1005)
R1705	1-208-865-81	s	RES, CHIP 120 (1005)
R1706	1-208-865-81	s	RES, CHIP 120 (1005)
R1707	1-208-865-81	s	RES, CHIP 120 (1005)
R1708	1-208-865-81	s	RES, CHIP 120 (1005)
R1709	1-208-865-81	s	RES, CHIP 120 (1005)
R1710	1-208-865-81	s	RES, CHIP 120 (1005)
R1801	1-208-865-81	s	RES, CHIP 120 (1005)
R1802	1-208-865-81	s	RES, CHIP 120 (1005)
R1803	1-208-865-81	s	RES, CHIP 120 (1005)
R1804	1-208-865-81	s	RES, CHIP 120 (1005)
R1805	1-208-865-81	s	RES, CHIP 120 (1005)
R1806	1-208-865-81	s	RES, CHIP 120 (1005)
R1807	1-208-865-81	s	RES, CHIP 120 (1005)
R1808	1-208-865-81	s	RES, CHIP 120 (1005)
R1809	1-208-865-81	s	RES, CHIP 120 (1005)
R1810	1-208-865-81	s	RES, CHIP 120 (1005)
R1901	1-208-865-81	s	RES, CHIP 120 (1005)
R1902	1-208-865-81	s	RES, CHIP 120 (1005)
R1903	1-208-865-81	s	RES, CHIP 120 (1005)
R1904	1-208-865-81	s	RES, CHIP 120 (1005)
R1905	1-208-865-81	s	RES, CHIP 120 (1005)
R1906	1-208-865-81	s	RES, CHIP 120 (1005)
R1907	1-208-865-81	s	RES, CHIP 120 (1005)
R1908	1-208-865-81	s	RES, CHIP 120 (1005)
R1909	1-208-865-81	s	RES, CHIP 120 (1005)
R1910	1-208-865-81	s	RES, CHIP 120 (1005)
R2001	1-208-865-81	s	RES, CHIP 120 (1005)
R2002	1-208-865-81	s	RES, CHIP 120 (1005)
R2003	1-208-865-81	s	RES, CHIP 120 (1005)
R2004	1-208-865-81	s	RES, CHIP 120 (1005)
R2005	1-208-865-81	s	RES, CHIP 120 (1005)
R2006	1-208-865-81	s	RES, CHIP 120 (1005)
R2007	1-208-865-81	s	RES, CHIP 120 (1005)
R2008	1-208-865-81	s	RES, CHIP 120 (1005)
R2009	1-208-865-81	s	RES, CHIP 120 (1005)
R2010	1-208-865-81	s	RES, CHIP 120 (1005)
R2100	1-208-863-81	s	RES, CHIP 100 (1005)
R2102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2201	1-208-911-81	s	RES, CHIP 10K (1005)
R2300	1-208-863-81	s	RES, CHIP 100 (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-208-911-81	s	RES, CHIP 10K (1005)
R2303	1-245-604-81	s	RES, CHIP 10M (1005)
R2304	1-208-935-81	s	RES, CHIP 100K (1005)
R2305	1-220-870-81	s	RES, CHIP 10 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-208-919-81	s	RES, CHIP 22K (1005)
R2309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2315	1-220-878-81	s	RES, CHIP 22 (1005)
R2317	1-208-943-81	s	RES, CHIP 220K (1005)
R2318	1-208-911-81	s	RES, CHIP 10K (1005)
R2400	1-208-863-81	s	RES, CHIP 100 (1005)
R2401	1-208-867-81	s	RES, CHIP 150 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2402	1-208-867-81	s	RES, CHIP 150 (1005)
R2403	1-208-867-81	s	RES, CHIP 150 (1005)
R2404	1-208-867-81	s	RES, CHIP 150 (1005)
R2405	1-220-878-81	s	RES, CHIP 22 (1005)
R2406	1-220-878-81	s	RES, CHIP 22 (1005)
R2407	1-220-878-81	s	RES, CHIP 22 (1005)
R2408	1-220-878-81	s	RES, CHIP 22 (1005)
R2410	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2411	1-220-878-81	s	RES, CHIP 22 (1005)
R2412	1-220-878-81	s	RES, CHIP 22 (1005)
R2413	1-220-878-81	s	RES, CHIP 22 (1005)
R2414	1-220-878-81	s	RES, CHIP 22 (1005)
R2415	1-220-878-81	s	RES, CHIP 22 (1005)
R2416	1-220-878-81	s	RES, CHIP 22 (1005)
R2417	1-220-878-81	s	RES, CHIP 22 (1005)
R2418	1-220-878-81	s	RES, CHIP 22 (1005)
R2419	1-220-878-81	s	RES, CHIP 22 (1005)
R2420	1-220-878-81	s	RES, CHIP 22 (1005)
R2421	1-220-878-81	s	RES, CHIP 22 (1005)
R2422	1-220-878-81	s	RES, CHIP 22 (1005)
R2423	1-220-878-81	s	RES, CHIP 22 (1005)
R2424	1-220-878-81	s	RES, CHIP 22 (1005)
R2425	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-220-878-81	s	RES, CHIP 22 (1005)
R2500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)
R2502	1-220-878-81	s	RES, CHIP 22 (1005)
R2503	1-220-878-81	s	RES, CHIP 22 (1005)
R2504	1-220-878-81	s	RES, CHIP 22 (1005)
R2505	1-220-878-81	s	RES, CHIP 22 (1005)
R2506	1-220-878-81	s	RES, CHIP 22 (1005)
R2507	1-220-878-81	s	RES, CHIP 22 (1005)
R2508	1-220-878-81	s	RES, CHIP 22 (1005)
R2509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2600	1-208-911-81	s	RES, CHIP 10K (1005)
R2601	1-208-911-81	s	RES, CHIP 10K (1005)
R2602	1-208-911-81	s	RES, CHIP 10K (1005)
R2603	1-208-911-81	s	RES, CHIP 10K (1005)
R2606	1-208-911-81	s	RES, CHIP 10K (1005)
R2607	1-208-911-81	s	RES, CHIP 10K (1005)
R2608	1-208-911-81	s	RES, CHIP 10K (1005)
R2610	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2611	1-220-878-81	s	RES, CHIP 22 (1005)
R2612	1-220-878-81	s	RES, CHIP 22 (1005)
R2613	1-220-878-81	s	RES, CHIP 22 (1005)
R2616	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2617	1-220-878-81	s	RES, CHIP 22 (1005)
R2618	1-220-878-81	s	RES, CHIP 22 (1005)
R2619	1-220-878-81	s	RES, CHIP 22 (1005)
R2620	1-220-878-81	s	RES, CHIP 22 (1005)
R2621	1-220-878-81	s	RES, CHIP 22 (1005)
R2622	1-220-878-81	s	RES, CHIP 22 (1005)
R2623	1-220-878-81	s	RES, CHIP 22 (1005)
R2624	1-220-878-81	s	RES, CHIP 22 (1005)
R2625	1-220-878-81	s	RES, CHIP 22 (1005)
R2626	1-220-878-81	s	RES, CHIP 22 (1005)
R2627	1-220-878-81	s	RES, CHIP 22 (1005)
R2628	1-220-878-81	s	RES, CHIP 22 (1005)
R2629	1-220-878-81	s	RES, CHIP 22 (1005)
R2630	1-220-878-81	s	RES, CHIP 22 (1005)
R2631	1-220-878-81	s	RES, CHIP 22 (1005)
R2632	1-220-878-81	s	RES, CHIP 22 (1005)
R2633	1-220-878-81	s	RES, CHIP 22 (1005)
R2634	1-220-878-81	s	RES, CHIP 22 (1005)
R2635	1-220-878-81	s	RES, CHIP 22 (1005)
R2636	1-220-878-81	s	RES, CHIP 22 (1005)
R2637	1-220-878-81	s	RES, CHIP 22 (1005)
R2638	1-220-878-81	s	RES, CHIP 22 (1005)
R2639	1-220-878-81	s	RES, CHIP 22 (1005)
R2640	1-208-911-81	s	RES, CHIP 10K (1005)
R2641	1-208-911-81	s	RES, CHIP 10K (1005)
R2642	1-208-911-81	s	RES, CHIP 10K (1005)
R2643	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2644	1-208-911-81	s	RES, CHIP 10K (1005)
R2645	1-208-911-81	s	RES, CHIP 10K (1005)
R2646	1-208-911-81	s	RES, CHIP 10K (1005)
R2647	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2649	1-208-911-81	s	RES, CHIP 10K (1005)
R2650	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2652	1-208-911-81	s	RES, CHIP 10K (1005)
R2653	1-208-911-81	s	RES, CHIP 10K (1005)
R2654	1-208-911-81	s	RES, CHIP 10K (1005)
R2655	1-208-911-81	s	RES, CHIP 10K (1005)
R2656	1-208-911-81	s	RES, CHIP 10K (1005)
R2657	1-208-911-81	s	RES, CHIP 10K (1005)
R2658	1-208-911-81	s	RES, CHIP 10K (1005)
R2659	1-208-911-81	s	RES, CHIP 10K (1005)
R2660	1-208-911-81	s	RES, CHIP 10K (1005)
R2661	1-208-911-81	s	RES, CHIP 10K (1005)
R2662	1-208-911-81	s	RES, CHIP 10K (1005)
R2664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2665	1-208-911-81	s	RES, CHIP 10K (1005)
R2666	1-208-911-81	s	RES, CHIP 10K (1005)
R2667	1-208-911-81	s	RES, CHIP 10K (1005)
R2668	1-208-911-81	s	RES, CHIP 10K (1005)
R2671	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2672	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2673	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2674	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2675	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2676	1-220-878-81	s	RES, CHIP 22 (1005)
R2677	1-220-878-81	s	RES, CHIP 22 (1005)
R2678	1-220-878-81	s	RES, CHIP 22 (1005)
R2679	1-220-878-81	s	RES, CHIP 22 (1005)
R2680	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2681	1-220-878-81	s	RES, CHIP 22 (1005)
R2682	1-220-878-81	s	RES, CHIP 22 (1005)
R2683	1-220-878-81	s	RES, CHIP 22 (1005)
R2684	1-208-935-81	s	RES, CHIP 100K (1005)
R2685	1-208-935-81	s	RES, CHIP 100K (1005)
R2686	1-208-935-81	s	RES, CHIP 100K (1005)
R2687	1-208-935-81	s	RES, CHIP 100K (1005)
R2688	1-208-935-81	s	RES, CHIP 100K (1005)
R2689	1-208-935-81	s	RES, CHIP 100K (1005)
R2690	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2691	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2692	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2693	1-208-935-81	s	RES, CHIP 100K (1005)
R2694	1-208-935-81	s	RES, CHIP 100K (1005)
R2695	1-220-878-81	s	RES, CHIP 22 (1005)
R2696	1-220-878-81	s	RES, CHIP 22 (1005)
R2697	1-220-878-81	s	RES, CHIP 22 (1005)
R2699	1-220-878-81	s	RES, CHIP 22 (1005)
R2701	1-220-878-81	s	RES, CHIP 22 (1005)
R2702	1-220-878-81	s	RES, CHIP 22 (1005)
R2703	1-208-935-81	s	RES, CHIP 100K (1005)
R2704	1-208-935-81	s	RES, CHIP 100K (1005)
R2705	1-208-935-81	s	RES, CHIP 100K (1005)
R2706	1-208-911-81	s	RES, CHIP 10K (1005)
R2707	1-208-911-81	s	RES, CHIP 10K (1005)
R2708	1-208-911-81	s	RES, CHIP 10K (1005)
R2750	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3200	1-208-911-81	s	RES, CHIP 10K (1005)
R3201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3209	1-220-878-81	s	RES, CHIP 22 (1005)
R3210	1-220-878-81	s	RES, CHIP 22 (1005)
R3211	1-220-878-81	s	RES, CHIP 22 (1005)
R3212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3213	1-220-878-81	s	RES, CHIP 22 (1005)
R3214	1-220-878-81	s	RES, CHIP 22 (1005)
R3215	1-220-878-81	s	RES, CHIP 22 (1005)
R3216	1-220-878-81	s	RES, CHIP 22 (1005)
R3217	1-220-878-81	s	RES, CHIP 22 (1005)
R3218	1-220-878-81	s	RES, CHIP 22 (1005)
R3220	1-220-878-81	s	RES, CHIP 22 (1005)
R3221	1-208-863-81	s	RES, CHIP 100 (1005)
R3222	1-220-878-81	s	RES, CHIP 22 (1005)
R3223	1-220-878-81	s	RES, CHIP 22 (1005)
R3224	1-220-878-81	s	RES, CHIP 22 (1005)
R3225	1-220-878-81	s	RES, CHIP 22 (1005)
R3230	1-220-878-81	s	RES, CHIP 22 (1005)
R3300	1-208-911-81	s	RES, CHIP 10K (1005)
R3301	1-208-911-81	s	RES, CHIP 10K (1005)
R3302	1-208-911-81	s	RES, CHIP 10K (1005)
R3303	1-208-911-81	s	RES, CHIP 10K (1005)
R3304	1-208-911-81	s	RES, CHIP 10K (1005)
R3305	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3306	1-208-911-81	s	RES, CHIP 10K (1005)
R3307	1-208-911-81	s	RES, CHIP 10K (1005)
R3308	1-208-911-81	s	RES, CHIP 10K (1005)
R3309	1-208-911-81	s	RES, CHIP 10K (1005)
R3310	1-208-911-81	s	RES, CHIP 10K (1005)
R3311	1-208-911-81	s	RES, CHIP 10K (1005)
R3312	1-208-911-81	s	RES, CHIP 10K (1005)
R3313	1-208-911-81	s	RES, CHIP 10K (1005)
R3314	1-208-911-81	s	RES, CHIP 10K (1005)
R3315	1-208-911-81	s	RES, CHIP 10K (1005)
R3400	1-208-911-81	s	RES, CHIP 10K (1005)
R3401	1-208-911-81	s	RES, CHIP 10K (1005)
R3402	1-208-911-81	s	RES, CHIP 10K (1005)
R3403	1-208-911-81	s	RES, CHIP 10K (1005)
R3404	1-208-911-81	s	RES, CHIP 10K (1005)
R3405	1-208-911-81	s	RES, CHIP 10K (1005)
R3406	1-208-911-81	s	RES, CHIP 10K (1005)
R3407	1-208-911-81	s	RES, CHIP 10K (1005)
R3408	1-208-911-81	s	RES, CHIP 10K (1005)
R3409	1-208-911-81	s	RES, CHIP 10K (1005)
R3410	1-208-911-81	s	RES, CHIP 10K (1005)
R3411	1-208-911-81	s	RES, CHIP 10K (1005)
R3412	1-208-911-81	s	RES, CHIP 10K (1005)
R3413	1-208-911-81	s	RES, CHIP 10K (1005)
R3414	1-208-911-81	s	RES, CHIP 10K (1005)
R3415	1-208-911-81	s	RES, CHIP 10K (1005)
R3500	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3501	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3509	1-208-855-81	s	RES, CHIP 47 (1005)
R3510	1-208-855-81	s	RES, CHIP 47 (1005)
R3511	1-208-855-81	s	RES, CHIP 47 (1005)
R3512	1-208-855-81	s	RES, CHIP 47 (1005)
R3513	1-208-855-81	s	RES, CHIP 47 (1005)
R3514	1-208-855-81	s	RES, CHIP 47 (1005)
R3515	1-208-855-81	s	RES, CHIP 47 (1005)
R3516	1-208-855-81	s	RES, CHIP 47 (1005)
R3517	1-208-855-81	s	RES, CHIP 47 (1005)
R3518	1-208-855-81	s	RES, CHIP 47 (1005)
R3519	1-208-855-81	s	RES, CHIP 47 (1005)
R3522	1-208-855-81	s	RES, CHIP 47 (1005)
R3523	1-208-855-81	s	RES, CHIP 47 (1005)
R3524	1-208-855-81	s	RES, CHIP 47 (1005)
R3526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3527	1-208-855-81	s	RES, CHIP 47 (1005)
R3528	1-208-855-81	s	RES, CHIP 47 (1005)
R3529	1-208-855-81	s	RES, CHIP 47 (1005)
R3530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3600	1-208-855-81	s	RES, CHIP 47 (1005)
R3601	1-208-855-81	s	RES, CHIP 47 (1005)
R3602	1-208-911-81	s	RES, CHIP 10K (1005)
R3603	1-208-911-81	s	RES, CHIP 10K (1005)
R3604	1-208-911-81	s	RES, CHIP 10K (1005)
R3605	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3607	1-220-878-81	s	RES, CHIP 22 (1005)
R3608	1-220-878-81	s	RES, CHIP 22 (1005)
R3609	1-220-878-81	s	RES, CHIP 22 (1005)
R3610	1-220-878-81	s	RES, CHIP 22 (1005)
R3611	1-220-878-81	s	RES, CHIP 22 (1005)
R3617	1-208-855-81	s	RES, CHIP 47 (1005)
R3623	1-208-935-81	s	RES, CHIP 100K (1005)
R3624	1-208-935-81	s	RES, CHIP 100K (1005)
R3700	1-208-935-81	s	RES, CHIP 100K (1005)
R3701	1-220-878-81	s	RES, CHIP 22 (1005)
R3702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3800	1-208-863-81	s	RES, CHIP 100 (1005)
R3801	1-208-911-81	s	RES, CHIP 10K (1005)
R3802	1-208-911-81	s	RES, CHIP 10K (1005)
R3803	1-208-911-81	s	RES, CHIP 10K (1005)
R3804	1-220-878-81	s	RES, CHIP 22 (1005)
R3805	1-220-878-81	s	RES, CHIP 22 (1005)
R3806	1-208-879-81	s	RES, CHIP 470 (1005)
R3807	1-208-863-81	s	RES, CHIP 100 (1005)
R3808	1-208-865-81	s	RES, CHIP 120 (1005)
R3809	1-208-879-81	s	RES, CHIP 470 (1005)
R3810	1-208-911-81	s	RES, CHIP 10K (1005)
R3811	1-208-911-81	s	RES, CHIP 10K (1005)
R3812	1-220-878-81	s	RES, CHIP 22 (1005)
R3813	1-220-878-81	s	RES, CHIP 22 (1005)
R3814	1-208-865-81	s	RES, CHIP 120 (1005)
R3815	1-208-879-81	s	RES, CHIP 470 (1005)
R3816	1-208-911-81	s	RES, CHIP 10K (1005)
R3817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3819	1-208-871-81	s	RES, CHIP 220 (1005)
R3901	1-208-911-81	s	RES, CHIP 10K (1005)
R3902	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3904	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3906	1-208-863-81	s	RES, CHIP 100 (1005)
R3907	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3908	1-208-911-81	s	RES, CHIP 10K (1005)
R3909	1-208-863-81	s	RES, CHIP 100 (1005)
R3910	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3912	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3919	1-208-863-81	s	RES, CHIP 100 (1005)
R3920	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3921	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3922	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3923	1-208-911-81	s	RES, CHIP 10K (1005)
R3932	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3933	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3934	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3935	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3936	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3937	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3939	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3941	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3943	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3945	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3947	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3952	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3953	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3954	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3955	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3956	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3957	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3958	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3959	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3961	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3962	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3964	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3965	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3967	1-208-855-81	s	RES, CHIP 47 (1005)
R3968	1-208-855-81	s	RES, CHIP 47 (1005)
R3969	1-208-855-81	s	RES, CHIP 47 (1005)
R3970	1-208-855-81	s	RES, CHIP 47 (1005)
R3971	1-208-855-81	s	RES, CHIP 47 (1005)
R3972	1-208-855-81	s	RES, CHIP 47 (1005)
R3973	1-208-855-81	s	RES, CHIP 47 (1005)
R3974	1-208-855-81	s	RES, CHIP 47 (1005)
R3975	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4200	1-208-911-81	s	RES, CHIP 10K (1005)
R4201	1-208-911-81	s	RES, CHIP 10K (1005)
R4202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4206	1-208-911-81	s	RES, CHIP 10K (1005)
R4207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4215	1-208-894-81	s	RES, CHIP 2.0K (1005)
R4216	1-208-894-81	s	RES, CHIP 2.0K (1005)
R4217	1-208-894-81	s	RES, CHIP 2.0K (1005)
R4218	1-208-894-81	s	RES, CHIP 2.0K (1005)
R4300	1-208-911-81	s	RES, CHIP 10K (1005)
R4301	1-208-911-81	s	RES, CHIP 10K (1005)
R4504	1-208-911-81	s	RES, CHIP 10K (1005)
R4506	1-208-911-81	s	RES, CHIP 10K (1005)
RB1001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1006	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1301	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1305	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1306	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1307	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1308	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1309	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1310	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1311	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1312	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1313	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1314	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1315	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1316	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1401	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1402	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1403	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1404	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1406	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1407	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1408	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1409	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1410	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1411	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1412	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1413	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1414	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1415	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1416	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1506	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1507	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1508	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1509	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1510	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1511	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1512	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1513	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1514	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1515	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1516	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1601	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1602	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1603	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1604	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1605	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1606	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1607	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1608	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1609	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1610	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1611	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1612	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1613	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1614	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1615	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1616	1-234-373-21	s	RES, NETWORK 220 (1005X4)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1702	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1703	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1704	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1705	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1706	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1707	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1708	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1709	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1710	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1711	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1712	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1713	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1714	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1715	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1716	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1803	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1804	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1805	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1806	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1807	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1808	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1809	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1810	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1811	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1812	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1813	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1814	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1815	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1816	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1901	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1902	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1903	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1906	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1907	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1908	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1909	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1910	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1911	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1912	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1913	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1914	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1915	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1916	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2006	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2007	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2008	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2009	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2010	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2011	1-234-373-21	s	RES, NETWORK 220 (1005X4)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2012	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2013	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2014	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2015	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2016	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2500	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2501	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2700	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2701	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2702	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2703	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2704	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2705	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2706	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2707	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2714	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2715	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2716	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2717	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2718	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2719	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2720	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2721	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2722	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2723	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2724	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2725	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2726	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2727	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2728	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2729	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2730	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2731	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2800	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2801	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2802	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2803	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2804	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2805	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2806	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2807	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2808	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2809	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2810	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2811	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2812	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2813	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2814	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2815	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2816	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2817	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2818	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2819	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2820	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2821	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2822	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2823	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2824	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2825	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2826	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2827	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2828	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2829	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2830	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2831	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2901	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2902	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2903	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2906	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2907	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2908	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2909	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2910	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2911	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2912	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2913	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2914	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2915	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2918	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2919	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2920	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2921	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2922	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2923	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3002	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3004	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3005	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3008	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3009	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3010	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3011	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3012	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3013	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3014	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3015	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3016	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3017	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3018	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3019	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3020	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3021	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3022	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3023	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3100	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3101	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3102	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3105	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3107	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3116	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3117	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3118	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3119	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3120	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3121	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3122	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3123	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3124	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3125	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3126	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3127	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3128	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3129	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3130	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3131	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3700	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3701	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3702	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3703	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3704	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3705	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3706	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3707	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3708	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3709	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3710	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3711	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3712	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3713	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3714	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3715	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3716	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3717	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3718	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3719	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3720	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3721	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3722	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3723	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3724	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3725	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(MY-114 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3726	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3727	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3728	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB4200	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB4300	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB4500	1-234-381-21	s	RES, NETWORK 100K (1005X4)
S200	1-771-721-21	s	SWITCH, TACTILE
S3601	1-771-721-21	s	SWITCH, TACTILE
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP220	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP2400	1-535-877-22	s	CHIP, CHECKER
TP2401	1-535-877-22	s	CHIP, CHECKER
TP2402	1-535-877-22	s	CHIP, CHECKER
TP2403	1-535-877-22	s	CHIP, CHECKER
TP2404	1-535-877-22	s	CHIP, CHECKER
TP2405	1-535-877-22	s	CHIP, CHECKER
TP2406	1-535-877-22	s	CHIP, CHECKER
TP2407	1-535-877-22	s	CHIP, CHECKER
TP2700	1-535-877-22	s	CHIP, CHECKER
TP2701	1-535-877-22	s	CHIP, CHECKER
TP3200	1-535-877-22	s	CHIP, CHECKER
TP3201	1-535-877-22	s	CHIP, CHECKER
TP3202	1-535-877-22	s	CHIP, CHECKER
TP3203	1-535-877-22	s	CHIP, CHECKER
TP3601	1-535-877-22	s	CHIP, CHECKER
TP3900	1-535-877-22	s	CHIP, CHECKER
TP4200	1-535-877-22	s	CHIP, CHECKER
TP4201	1-535-877-22	s	CHIP, CHECKER
TP4202	1-535-877-22	s	CHIP, CHECKER
TP4203	1-535-877-22	s	CHIP, CHECKER
TP4300	1-535-877-22	s	CHIP, CHECKER
TP4301	1-535-877-22	s	CHIP, CHECKER
TP4302	1-535-877-22	s	CHIP, CHECKER
TP4303	1-535-877-22	s	CHIP, CHECKER
TP4500	1-535-877-22	s	CHIP, CHECKER
TP4501	1-535-877-22	s	CHIP, CHECKER
TP4502	1-535-877-22	s	CHIP, CHECKER
TP4503	1-535-877-22	s	CHIP, CHECKER
X1	1-795-796-11	s	VIBRATOR, CRYSTAL (24.576 MHz)
X2300	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2301	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X2302	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X3800	1-813-038-21	s	OSCILLATOR, CRYSTAL (SMD)
X3900	1-813-065-11	s	VIBRATOR, CRYSTAL (25 MHz)

OUT-33 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1547-164-A	s	MOUNTED CIRCUIT BOARD, OUT-33
1pc	1-789-288-12	s	PC BOARD, (CPU-DT MODULE)
3pcs	3-370-475-01	s	SCREW (NYLOCK +B 3X6)
3pcs	3-636-891-01	o	SPACER
7pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
1pc	3-854-851-01	s	SHEET,RADIATION
6pcs	4-143-557-01	s	SPRING, COMPRESSION
6pcs	4-143-559-01	s	PIN, PUSH
2pcs	7-626-300-54	s	SPRING PIN 3X6
3pcs	7-682-946-01	s	SCREW +PSW 3X5
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C207	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C208	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C212	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C213	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C214	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C215	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C216	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C217	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C218	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C219	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C220	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C221	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C222	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C223	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C224	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C225	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C226	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C227	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C228	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C229	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C230	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C231	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C232	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C233	1-100-986-21	s	CAP, ELECT 330MF
C234	1-100-986-21	s	CAP, ELECT 330MF
C235	1-100-986-21	s	CAP, ELECT 330MF
C236	1-100-986-21	s	CAP, ELECT 330MF
C237	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C238	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C239	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C241	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C242	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C301	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C303	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C304	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C307	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C308	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C309	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C310	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C311	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C312	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C314	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C315	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C318	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C321	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C322	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C323	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C325	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C326	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C328	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C329	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C331	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C332	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C333	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C334	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C335	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C336	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C338	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C339	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C401	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C402	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C403	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C404	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C405	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C406	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C407	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C408	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C409	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C410	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C411	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C412	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C413	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C414	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C415	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C416	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C417	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C418	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C513	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C514	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C616	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C617	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C902	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C1001	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1703	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1709	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1720	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1721	1-127-710-21	s	CAP, CHIP ELECT 47MF (7343)
C1722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1723	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1724	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C1725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1726	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1727	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1728	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1729	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1730	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1731	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2002	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2003	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2004	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2005	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2006	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2007	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2008	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2009	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2010	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2011	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2012	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2013	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2014	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2015	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2016	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2017	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2018	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2019	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2020	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2021	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2022	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2023	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2024	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2025	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2026	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2027	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2028	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2029	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2030	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2031	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2032	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2101	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2102	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2104	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2105	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2106	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2107	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2108	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2109	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2110	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2111	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2112	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2115	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2116	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2201	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2213	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2216	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2219	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2222	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2223	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2226	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2227	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2229	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2232	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2702	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2703	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2704	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2705	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2706	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2713	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2725	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2726	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2727	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2738	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2741	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2748	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2751	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2753	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2754	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2755	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2757	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2767	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2768	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2769	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2770	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2771	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2772	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2773	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C2774	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2778	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2780	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2782	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2786	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2790	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2794	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2797	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2798	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2799	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2821	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2831	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2832	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2833	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2834	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2835	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2836	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2837	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2838	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2839	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2840	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2841	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2842	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2843	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2844	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2845	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2846	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2847	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2848	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C2849	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C2850	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C2851	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C2852	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C2853	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C2854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2860	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2862	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2864	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2902	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2907	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2909	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2913	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2916	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2922	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2928	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2929	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2933	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2938	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2941	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2943	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2948	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2958	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2962	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2969	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2971	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2972	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2973	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2974	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2975	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2976	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2977	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2978	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2980	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2981	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2982	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2983	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2984	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2985	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2986	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2987	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2988	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2989	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2990	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2991	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2992	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2993	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2995	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2996	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2997	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2999	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3005	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3011	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3012	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3016	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3021	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3024	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3026	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3031	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3041	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3045	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3047	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3049	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3052	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3054	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3056	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3058	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3059	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3061	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3064	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3065	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3066	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3067	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3068	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C3069	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3070	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3076	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3080	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3086	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3088	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3101	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3102	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3103	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3104	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3105	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3118	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3119	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3120	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3137	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3139	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3140	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3141	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3142	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3143	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3144	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3145	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3146	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3147	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3152	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3153	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3154	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3155	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3156	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3157	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3158	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3159	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3165	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3167	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3168	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3169	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3170	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3171	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3172	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3173	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3176	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3177	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3180	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3182	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3183	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3184	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3185	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3186	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3187	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3188	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3189	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3190	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3191	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3192	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3193	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3198	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3199	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3200	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3304	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3305	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3309	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3318	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3319	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3320	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3336	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3338	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3339	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3340	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3341	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3342	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3343	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3352	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3353	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3354	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3355	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3356	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3357	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3358	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3363	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3371	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3372	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3373	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3374	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3375	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3376	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3377	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3378	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3382	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3383	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3384	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3385	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3386	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3387	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3388	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3389	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3390	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3391	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3392	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3393	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3394	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3395	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3396	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3397	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3398	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3399	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3502	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3503	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3504	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3505	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3507	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3508	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3518	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3519	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3520	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3537	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3538	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3539	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3541	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3542	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3543	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3544	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3545	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3546	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3547	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3552	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3553	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C3554	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3555	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3563	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3565	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3567	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3569	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3570	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3572	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3573	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3575	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3577	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3582	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3583	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3584	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3585	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C3586	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3587	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3588	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3589	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C3590	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3591	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3592	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3593	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C3594	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3595	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3596	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3598	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3599	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3600	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4001	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4002	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4003	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4004	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4005	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4006	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4007	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C4008	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4009	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4010	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4011	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4012	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4013	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4019	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4021	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4024	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4025	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4027	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4030	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4034	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4037	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4038	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4040	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4043	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4044	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4047	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4048	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4051	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4054	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4057	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4058	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4059	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4063	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4064	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4065	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4066	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4067	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4068	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4069	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4070	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4071	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4072	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4073	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4074	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4076	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4077	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4078	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4079	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4080	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4081	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4082	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4083	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4084	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4085	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4086	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4087	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4088	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4089	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4090	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4091	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4092	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4093	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4094	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4095	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4096	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4097	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4098	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4099	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4100	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4101	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4102	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4103	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C4104	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4107	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4110	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4113	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4116	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4117	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4119	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4122	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4123	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4125	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4128	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4129	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4131	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4132	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4133	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4135	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4136	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C4137	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4138	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4140	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4141	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4142	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4143	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4144	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4145	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4146	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4147	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4149	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4150	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4151	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4152	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4153	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4154	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4155	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4156	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4157	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4158	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4159	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4161	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4162	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4163	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4164	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4165	1-165-798-21	s	CAP, CHIP ELECT 100MF (7343)
C4166	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4168	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4170	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4172	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4173	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4175	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4177	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4179	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4180	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4182	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4183	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4185	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4186	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4188	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4189	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4191	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4194	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4195	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN901	1-779-419-11	s	CONNECTOR, BOARD TO BOARD 280P
CN1001	1-564-013-11	o	PIN, CONNECTOR 3P
CN1002	1-564-013-11	o	PIN, CONNECTOR 3P
CN1901	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN1902	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D201	8-719-069-28	s	DIODE 1SS400TE-61
D202	8-719-069-28	s	DIODE 1SS400TE-61
D203	8-719-074-31	s	DIODE CL-196YG-CD-T
D301	8-719-069-28	s	DIODE 1SS400TE-61
D302	8-719-069-28	s	DIODE 1SS400TE-61
D303	8-719-069-28	s	DIODE 1SS400TE-61
D304	8-719-069-28	s	DIODE 1SS400TE-61
D305	8-719-069-28	s	DIODE 1SS400TE-61
D306	8-719-069-28	s	DIODE 1SS400TE-61

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D307	8-719-069-28	s	DIODE 1SS400TE-61
D401	8-719-074-31	s	DIODE CL-196YG-CD-T
D402	8-719-074-31	s	DIODE CL-196YG-CD-T
D403	8-719-074-31	s	DIODE CL-196YG-CD-T
D404	8-719-074-31	s	DIODE CL-196YG-CD-T
D405	8-719-069-28	s	DIODE 1SS400TE-61
D406	8-719-069-28	s	DIODE 1SS400TE-61
D801	8-719-077-09	s	DIODE CL-196HR-CD-T
D802	8-719-077-09	s	DIODE CL-196HR-CD-T
D803	8-719-074-31	s	DIODE CL-196YG-CD-T
D804	8-719-074-31	s	DIODE CL-196YG-CD-T
D805	8-719-074-31	s	DIODE CL-196YG-CD-T
D3801	8-719-074-31	s	DIODE CL-196YG-CD-T
D3802	8-719-074-31	s	DIODE CL-196YG-CD-T
D3803	8-719-074-31	s	DIODE CL-196YG-CD-T
D3804	8-719-074-31	s	DIODE CL-196YG-CD-T
D3805	8-719-074-31	s	DIODE CL-196YG-CD-T
D3806	8-719-074-31	s	DIODE CL-196YG-CD-T
D3807	8-719-074-31	s	DIODE CL-196YG-CD-T
D3808	8-719-074-31	s	DIODE CL-196YG-CD-T
DD201	1-487-092-11	s	DC-DC CONVERTER
DD202	1-487-092-11	s	DC-DC CONVERTER
DD203	1-487-092-11	s	DC-DC CONVERTER
DD204	1-487-092-11	s	DC-DC CONVERTER
E401	1-535-877-22	s	CHIP, CHECKER
E402	1-535-877-22	s	CHIP, CHECKER
E403	1-535-877-22	s	CHIP, CHECKER
E404	1-535-877-22	s	CHIP, CHECKER
E405	1-535-877-22	s	CHIP, CHECKER
E406	1-535-877-22	s	CHIP, CHECKER
E407	1-535-877-22	s	CHIP, CHECKER
E408	1-535-877-22	s	CHIP, CHECKER
E409	1-535-877-22	s	CHIP, CHECKER
E410	1-535-877-22	s	CHIP, CHECKER
E411	1-535-877-22	s	CHIP, CHECKER
E412	1-535-877-22	s	CHIP, CHECKER
E413	1-535-877-22	s	CHIP, CHECKER
E414	1-535-877-22	s	CHIP, CHECKER
E415	1-535-877-22	s	CHIP, CHECKER
E416	1-535-877-22	s	CHIP, CHECKER
E417	1-535-877-22	s	CHIP, CHECKER
E418	1-535-877-22	s	CHIP, CHECKER
F201	⚠ 1-576-566-21	s	FUSE (SMD) (15A/65V)
F202	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F203	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F204	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F205	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB201	1-400-580-21	s	FERRITE, EMI (SMD)
FB202	1-400-580-21	s	FERRITE, EMI (SMD)
FB301	1-400-580-21	s	FERRITE, EMI (SMD)
FB401	1-400-580-21	s	FERRITE, EMI (SMD)
FB402	1-400-580-21	s	FERRITE, EMI (SMD)
FB501	1-400-580-21	s	FERRITE, EMI (SMD)
FB601	1-400-580-21	s	FERRITE, EMI (SMD)
FB701	1-400-580-21	s	FERRITE, EMI (SMD)
FB702	1-400-580-21	s	FERRITE, EMI (SMD)
FB2701	1-400-580-21	s	FERRITE, EMI (SMD)
FB2702	1-400-580-21	s	FERRITE, EMI (SMD)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB2703	1-400-580-21	s	FERRITE, EMI (SMD)
FB2704	1-400-580-21	s	FERRITE, EMI (SMD)
FB3101	1-400-580-21	s	FERRITE, EMI (SMD)
FB3102	1-400-580-21	s	FERRITE, EMI (SMD)
FB3103	1-400-580-21	s	FERRITE, EMI (SMD)
FB3104	1-400-580-21	s	FERRITE, EMI (SMD)
FB3301	1-400-580-21	s	FERRITE, EMI (SMD)
FB3302	1-400-580-21	s	FERRITE, EMI (SMD)
FB3303	1-400-580-21	s	FERRITE, EMI (SMD)
FB3304	1-400-580-21	s	FERRITE, EMI (SMD)
FB3501	1-400-580-21	s	FERRITE, EMI (SMD)
FB3502	1-400-580-21	s	FERRITE, EMI (SMD)
FB3503	1-400-580-21	s	FERRITE, EMI (SMD)
FB3504	1-400-580-21	s	FERRITE, EMI (SMD)
FB4001	1-400-580-21	s	FERRITE, EMI (SMD)
FB4002	1-400-580-21	s	FERRITE, EMI (SMD)
FL1701	1-239-899-21	s	FILTER, CHIP EMI
IC201	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC202	6-708-324-01	s	IC R3112N301A-TR-FA
IC303	6-703-449-01	s	IC LP2995MX
IC401	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC402	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC403	8-759-338-95	s	IC NJM2903V(TE2)
IC404	8-759-338-95	s	IC NJM2903V(TE2)
IC501	8-759-639-86	s	IC SN65LVDS32DR
IC502	6-709-646-01	s	IC TLC2933AIPWR
IC503	8-759-388-62	s	IC NJU7062M(TE2)
IC504	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC505	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC506	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC507	8-759-669-44	s	IC SN74LVC74APWR-12
IC508	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC509	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC510	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC511	8-759-639-85	s	IC SN65LVDS31DR
IC601	8-759-639-86	s	IC SN65LVDS32DR
IC602	6-709-646-01	s	IC TLC2933AIPWR
IC603	8-759-388-62	s	IC NJU7062M(TE2)
IC604	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC605	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC606	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC607	8-759-669-44	s	IC SN74LVC74APWR-12
IC608	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC609	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC610	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC611	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC614	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC615	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC701	6-703-875-01	s	IC CDCVF2505PWR
IC702	8-759-639-86	s	IC SN65LVDS32DR
IC703	8-759-639-86	s	IC SN65LVDS32DR
IC704	8-759-639-86	s	IC SN65LVDS32DR
IC801	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC802	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC803	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC804	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC1002	8-759-592-49	s	IC TC7SZ125FU(TE85R)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1003	8-759-639-86	s	IC SN65LVDS32DR
IC1004	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC1005	6-710-018-01	s	IC CAT24C02WI-GT3
IC1006	6-705-514-01	s	IC MAX3222IPWR
IC1007	8-759-669-43	s	IC SN74LVC157APWR-12
IC1008	8-759-392-77	s	IC SN74LVC245APWR
IC1009	8-759-639-85	s	IC SN65LVDS31DR
IC1010	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1011	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1012	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1013	6-705-514-01	s	IC MAX3222IPWR
IC1101	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1102	8-759-392-77	s	IC SN74LVC245APWR
IC1103	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1104	8-759-392-77	s	IC SN74LVC245APWR
IC1105	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1201	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1202	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1203	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1204	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1301	8-759-392-77	s	IC SN74LVC245APWR
IC1302	8-759-392-77	s	IC SN74LVC245APWR
IC1303	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1601	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1602	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1603	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1604	6-706-224-01	s	IC ADM1032ARMZ-R7
IC1701	6-703-624-01	s	IC UPD72874GC-YEB
IC1702	6-710-018-01	s	IC CAT24C02WI-GT3
IC1801	8-759-392-77	s	IC SN74LVC245APWR
IC1901	8-759-392-77	s	IC SN74LVC245APWR
IC1902	8-759-392-77	s	IC SN74LVC245APWR
IC2201	6-701-870-01	s	IC THC63LVDF84B-T
IC2202	6-701-870-01	s	IC THC63LVDF84B-T
L501	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L601	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L1701	1-469-294-21	s	COIL, 1394 COMMON MODE
L1702	1-469-294-21	s	COIL, 1394 COMMON MODE
L1703	1-469-294-21	s	COIL, 1394 COMMON MODE
L2701	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2702	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2703	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2704	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2705	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2706	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2901	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2902	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2903	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2904	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3101	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3102	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3103	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3104	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3301	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3302	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3303	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3304	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3501	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3502	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L3503	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L3504	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4001	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4002	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4003	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4004	1-412-943-21	s	INDUCTOR 2.2UH (2520)
L4005	1-412-943-21	s	INDUCTOR 2.2UH (2520)
Q201	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q205	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q407	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q408	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q409	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q410	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q502	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q503	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q602	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q603	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q604	8-729-928-55	s	TRANSISTOR DTA123JE-TL
R201	1-208-903-81	s	RES, CHIP 4.7K (1005)
R202	1-208-943-81	s	RES, CHIP 220K (1005)
R203	1-208-927-81	s	RES, CHIP 47K (1005)
R204	1-208-935-81	s	RES, CHIP 100K (1005)
R205	1-208-903-81	s	RES, CHIP 4.7K (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-887-81	s	RES, CHIP 1.0K (1005)
R208	1-208-927-81	s	RES, CHIP 47K (1005)
R209	1-208-927-81	s	RES, CHIP 47K (1005)
R210	1-208-927-81	s	RES, CHIP 47K (1005)
R211	1-208-927-81	s	RES, CHIP 47K (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R215	1-208-919-81	s	RES, CHIP 22K (1005)
R217	1-208-919-81	s	RES, CHIP 22K (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-895-81	s	RES, CHIP 2.2K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
R222	1-208-919-81	s	RES, CHIP 22K (1005)
R223	1-208-879-81	s	RES, CHIP 470 (1005)
R224	1-208-919-81	s	RES, CHIP 22K (1005)
R225	1-208-879-81	s	RES, CHIP 470 (1005)
R226	1-208-903-81	s	RES, CHIP 4.7K (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-927-81	s	RES, CHIP 47K (1005)
R302	1-208-927-81	s	RES, CHIP 47K (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R303	1-208-903-81	s	RES, CHIP 4.7K (1005)
R304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R305	1-208-903-81	s	RES, CHIP 4.7K (1005)
R306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R308	1-208-903-81	s	RES, CHIP 4.7K (1005)
R309	1-208-903-81	s	RES, CHIP 4.7K (1005)
R310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R311	1-208-927-81	s	RES, CHIP 47K (1005)
R312	1-208-927-81	s	RES, CHIP 47K (1005)
R313	1-208-903-81	s	RES, CHIP 4.7K (1005)
R314	1-208-903-81	s	RES, CHIP 4.7K (1005)
R315	1-208-903-81	s	RES, CHIP 4.7K (1005)
R316	1-208-903-81	s	RES, CHIP 4.7K (1005)
R317	1-208-903-81	s	RES, CHIP 4.7K (1005)
R318	1-208-903-81	s	RES, CHIP 4.7K (1005)
R319	1-208-903-81	s	RES, CHIP 4.7K (1005)
R320	1-208-903-81	s	RES, CHIP 4.7K (1005)
R321	1-208-903-81	s	RES, CHIP 4.7K (1005)
R322	1-208-903-81	s	RES, CHIP 4.7K (1005)
R323	1-208-927-81	s	RES, CHIP 47K (1005)
R324	1-208-903-81	s	RES, CHIP 4.7K (1005)
R325	1-208-903-81	s	RES, CHIP 4.7K (1005)
R326	1-208-903-81	s	RES, CHIP 4.7K (1005)
R327	1-208-927-81	s	RES, CHIP 47K (1005)
R328	1-208-903-81	s	RES, CHIP 4.7K (1005)
R329	1-208-903-81	s	RES, CHIP 4.7K (1005)
R330	1-208-903-81	s	RES, CHIP 4.7K (1005)
R331	1-208-903-81	s	RES, CHIP 4.7K (1005)
R332	1-208-903-81	s	RES, CHIP 4.7K (1005)
R333	1-208-903-81	s	RES, CHIP 4.7K (1005)
R334	1-208-903-81	s	RES, CHIP 4.7K (1005)
R335	1-208-903-81	s	RES, CHIP 4.7K (1005)
R336	1-208-927-81	s	RES, CHIP 47K (1005)
R337	1-208-903-81	s	RES, CHIP 4.7K (1005)
R338	1-208-903-81	s	RES, CHIP 4.7K (1005)
R339	1-208-903-81	s	RES, CHIP 4.7K (1005)
R340	1-208-903-81	s	RES, CHIP 4.7K (1005)
R341	1-208-903-81	s	RES, CHIP 4.7K (1005)
R342	1-208-903-81	s	RES, CHIP 4.7K (1005)
R343	1-208-903-81	s	RES, CHIP 4.7K (1005)
R344	1-208-903-81	s	RES, CHIP 4.7K (1005)
R345	1-208-903-81	s	RES, CHIP 4.7K (1005)
R346	1-208-903-81	s	RES, CHIP 4.7K (1005)
R347	1-208-903-81	s	RES, CHIP 4.7K (1005)
R348	1-208-903-81	s	RES, CHIP 4.7K (1005)
R349	1-208-903-81	s	RES, CHIP 4.7K (1005)
R350	1-208-903-81	s	RES, CHIP 4.7K (1005)
R351	1-208-903-81	s	RES, CHIP 4.7K (1005)
R352	1-208-903-81	s	RES, CHIP 4.7K (1005)
R401	1-208-903-81	s	RES, CHIP 4.7K (1005)
R402	1-208-903-81	s	RES, CHIP 4.7K (1005)
R403	1-208-903-81	s	RES, CHIP 4.7K (1005)
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R405	1-208-903-81	s	RES, CHIP 4.7K (1005)
R406	1-208-887-81	s	RES, CHIP 1.0K (1005)
R407	1-208-887-81	s	RES, CHIP 1.0K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-208-935-81	s	RES, CHIP 100K (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-903-81	s	RES, CHIP 4.7K (1005)
R412	1-208-895-81	s	RES, CHIP 2.2K (1005)
R413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-935-81	s	RES, CHIP 100K (1005)
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-208-903-81	s	RES, CHIP 4.7K (1005)
R418	1-208-895-81	s	RES, CHIP 2.2K (1005)
R419	1-208-911-81	s	RES, CHIP 10K (1005)
R420	1-208-903-81	s	RES, CHIP 4.7K (1005)
R421	1-208-911-81	s	RES, CHIP 10K (1005)
R422	1-208-935-81	s	RES, CHIP 100K (1005)
R423	1-208-911-81	s	RES, CHIP 10K (1005)
R424	1-208-903-81	s	RES, CHIP 4.7K (1005)
R425	1-208-895-81	s	RES, CHIP 2.2K (1005)
R426	1-208-919-81	s	RES, CHIP 22K (1005)
R427	1-208-911-81	s	RES, CHIP 10K (1005)
R428	1-208-935-81	s	RES, CHIP 100K (1005)
R429	1-208-911-81	s	RES, CHIP 10K (1005)
R430	1-208-903-81	s	RES, CHIP 4.7K (1005)
R431	1-208-895-81	s	RES, CHIP 2.2K (1005)
R432	1-208-903-81	s	RES, CHIP 4.7K (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-220-878-81	s	RES, CHIP 22 (1005)
R503	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-245-604-81	s	RES, CHIP 10M (1005)
R506	1-208-935-81	s	RES, CHIP 100K (1005)
R507	1-208-943-81	s	RES, CHIP 220K (1005)
R508	1-220-870-81	s	RES, CHIP 10 (1005)
R509	1-220-878-81	s	RES, CHIP 22 (1005)
R510	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-208-919-81	s	RES, CHIP 22K (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R601	1-208-863-81	s	RES, CHIP 100 (1005)
R602	1-208-863-81	s	RES, CHIP 100 (1005)
R603	1-220-878-81	s	RES, CHIP 22 (1005)
R604	1-220-878-81	s	RES, CHIP 22 (1005)
R605	1-208-911-81	s	RES, CHIP 10K (1005)
R606	1-220-878-81	s	RES, CHIP 22 (1005)
R607	1-220-878-81	s	RES, CHIP 22 (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-245-604-81	s	RES, CHIP 10M (1005)
R611	1-208-935-81	s	RES, CHIP 100K (1005)
R612	1-208-943-81	s	RES, CHIP 220K (1005)
R613	1-220-870-81	s	RES, CHIP 10 (1005)
R614	1-220-878-81	s	RES, CHIP 22 (1005)
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-919-81	s	RES, CHIP 22K (1005)
R618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R620	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R623	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R624	1-220-878-81	s	RES, CHIP 22 (1005)
R626	1-220-878-81	s	RES, CHIP 22 (1005)
R701	1-208-863-81	s	RES, CHIP 100 (1005)
R702	1-208-863-81	s	RES, CHIP 100 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R710	1-208-887-81	s	RES, CHIP 1.0K (1005)
R711	1-208-887-81	s	RES, CHIP 1.0K (1005)
R712	1-208-887-81	s	RES, CHIP 1.0K (1005)
R713	1-208-911-81	s	RES, CHIP 10K (1005)
R714	1-220-878-81	s	RES, CHIP 22 (1005)
R717	1-220-878-81	s	RES, CHIP 22 (1005)
R718	1-220-878-81	s	RES, CHIP 22 (1005)
R719	1-220-878-81	s	RES, CHIP 22 (1005)
R721	1-220-882-81	s	RES, CHIP 33 (1005)
R724	1-208-887-81	s	RES, CHIP 1.0K (1005)
R727	1-208-887-81	s	RES, CHIP 1.0K (1005)
R728	1-208-867-81	s	RES, CHIP 150 (1005)
R729	1-208-867-81	s	RES, CHIP 150 (1005)
R730	1-208-867-81	s	RES, CHIP 150 (1005)
R731	1-208-867-81	s	RES, CHIP 150 (1005)
R732	1-220-878-81	s	RES, CHIP 22 (1005)
R733	1-220-878-81	s	RES, CHIP 22 (1005)
R734	1-220-878-81	s	RES, CHIP 22 (1005)
R735	1-220-878-81	s	RES, CHIP 22 (1005)
R736	1-208-863-81	s	RES, CHIP 100 (1005)
R737	1-208-863-81	s	RES, CHIP 100 (1005)
R738	1-208-863-81	s	RES, CHIP 100 (1005)
R739	1-208-863-81	s	RES, CHIP 100 (1005)
R740	1-208-863-81	s	RES, CHIP 100 (1005)
R741	1-208-863-81	s	RES, CHIP 100 (1005)
R742	1-208-863-81	s	RES, CHIP 100 (1005)
R743	1-208-863-81	s	RES, CHIP 100 (1005)
R744	1-220-878-81	s	RES, CHIP 22 (1005)
R745	1-220-878-81	s	RES, CHIP 22 (1005)
R746	1-220-878-81	s	RES, CHIP 22 (1005)
R747	1-220-878-81	s	RES, CHIP 22 (1005)
R748	1-220-878-81	s	RES, CHIP 22 (1005)
R749	1-220-878-81	s	RES, CHIP 22 (1005)
R750	1-220-878-81	s	RES, CHIP 22 (1005)
R751	1-220-878-81	s	RES, CHIP 22 (1005)
R752	1-220-878-81	s	RES, CHIP 22 (1005)
R753	1-220-878-81	s	RES, CHIP 22 (1005)
R754	1-220-878-81	s	RES, CHIP 22 (1005)
R755	1-220-878-81	s	RES, CHIP 22 (1005)
R756	1-220-878-81	s	RES, CHIP 22 (1005)
R757	1-220-878-81	s	RES, CHIP 22 (1005)
R758	1-220-878-81	s	RES, CHIP 22 (1005)
R759	1-220-878-81	s	RES, CHIP 22 (1005)
R760	1-220-878-81	s	RES, CHIP 22 (1005)
R761	1-220-878-81	s	RES, CHIP 22 (1005)
R762	1-220-878-81	s	RES, CHIP 22 (1005)
R763	1-220-878-81	s	RES, CHIP 22 (1005)
R764	1-220-878-81	s	RES, CHIP 22 (1005)
R769	1-220-878-81	s	RES, CHIP 22 (1005)
R804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R805	1-220-878-81	s	RES, CHIP 22 (1005)
R806	1-220-878-81	s	RES, CHIP 22 (1005)
R807	1-220-878-81	s	RES, CHIP 22 (1005)
R808	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R809	1-220-878-81	s	RES, CHIP 22 (1005)
R810	1-220-878-81	s	RES, CHIP 22 (1005)
R811	1-220-878-81	s	RES, CHIP 22 (1005)
R812	1-220-878-81	s	RES, CHIP 22 (1005)
R813	1-220-878-81	s	RES, CHIP 22 (1005)
R814	1-220-878-81	s	RES, CHIP 22 (1005)
R815	1-220-878-81	s	RES, CHIP 22 (1005)
R816	1-220-878-81	s	RES, CHIP 22 (1005)
R817	1-220-878-81	s	RES, CHIP 22 (1005)
R818	1-220-878-81	s	RES, CHIP 22 (1005)
R819	1-220-878-81	s	RES, CHIP 22 (1005)
R820	1-208-911-81	s	RES, CHIP 10K (1005)
R821	1-208-887-81	s	RES, CHIP 1.0K (1005)
R822	1-208-911-81	s	RES, CHIP 10K (1005)
R823	1-208-887-81	s	RES, CHIP 1.0K (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-208-911-81	s	RES, CHIP 10K (1005)
R827	1-208-911-81	s	RES, CHIP 10K (1005)
R828	1-208-911-81	s	RES, CHIP 10K (1005)
R829	1-208-911-81	s	RES, CHIP 10K (1005)
R830	1-208-911-81	s	RES, CHIP 10K (1005)
R831	1-208-911-81	s	RES, CHIP 10K (1005)
R832	1-208-911-81	s	RES, CHIP 10K (1005)
R833	1-208-887-81	s	RES, CHIP 1.0K (1005)
R834	1-208-887-81	s	RES, CHIP 1.0K (1005)
R835	1-208-887-81	s	RES, CHIP 1.0K (1005)
R836	1-208-887-81	s	RES, CHIP 1.0K (1005)
R837	1-208-887-81	s	RES, CHIP 1.0K (1005)
R838	1-208-911-81	s	RES, CHIP 10K (1005)
R839	1-208-887-81	s	RES, CHIP 1.0K (1005)
R840	1-220-878-81	s	RES, CHIP 22 (1005)
R841	1-220-878-81	s	RES, CHIP 22 (1005)
R842	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R844	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R846	1-220-878-81	s	RES, CHIP 22 (1005)
R847	1-220-878-81	s	RES, CHIP 22 (1005)
R848	1-220-878-81	s	RES, CHIP 22 (1005)
R849	1-220-878-81	s	RES, CHIP 22 (1005)
R850	1-220-878-81	s	RES, CHIP 22 (1005)
R851	1-208-935-81	s	RES, CHIP 100K (1005)
R852	1-208-935-81	s	RES, CHIP 100K (1005)
R853	1-208-911-81	s	RES, CHIP 10K (1005)
R854	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R855	1-208-911-81	s	RES, CHIP 10K (1005)
R901	1-208-935-81	s	RES, CHIP 100K (1005)
R902	1-208-935-81	s	RES, CHIP 100K (1005)
R903	1-208-935-81	s	RES, CHIP 100K (1005)
R904	1-220-878-81	s	RES, CHIP 22 (1005)
R1001	1-208-863-81	s	RES, CHIP 100 (1005)
R1002	1-208-879-81	s	RES, CHIP 470 (1005)
R1003	1-220-878-81	s	RES, CHIP 22 (1005)
R1004	1-220-878-81	s	RES, CHIP 22 (1005)
R1005	1-220-878-81	s	RES, CHIP 22 (1005)
R1006	1-220-878-81	s	RES, CHIP 22 (1005)
R1007	1-208-855-81	s	RES, CHIP 47 (1005)
R1008	1-208-855-81	s	RES, CHIP 47 (1005)
R1009	1-220-878-81	s	RES, CHIP 22 (1005)
R1012	1-220-878-81	s	RES, CHIP 22 (1005)
R1013	1-220-878-81	s	RES, CHIP 22 (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1014	1-208-871-81	s	RES, CHIP 220 (1005)
R1015	1-220-878-81	s	RES, CHIP 22 (1005)
R1016	1-220-878-81	s	RES, CHIP 22 (1005)
R1017	1-220-878-81	s	RES, CHIP 22 (1005)
R1018	1-220-878-81	s	RES, CHIP 22 (1005)
R1019	1-220-878-81	s	RES, CHIP 22 (1005)
R1020	1-220-878-81	s	RES, CHIP 22 (1005)
R1024	1-208-935-81	s	RES, CHIP 100K (1005)
R1025	1-208-935-81	s	RES, CHIP 100K (1005)
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1601	1-208-911-81	s	RES, CHIP 10K (1005)
R1602	1-208-911-81	s	RES, CHIP 10K (1005)
R1603	1-208-911-81	s	RES, CHIP 10K (1005)
R1604	1-208-911-81	s	RES, CHIP 10K (1005)
R1605	1-208-911-81	s	RES, CHIP 10K (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1703	1-208-911-81	s	RES, CHIP 10K (1005)
R1704	1-220-878-81	s	RES, CHIP 22 (1005)
R1705	1-208-863-81	s	RES, CHIP 100 (1005)
R1706	1-208-935-81	s	RES, CHIP 100K (1005)
R1707	1-208-911-81	s	RES, CHIP 10K (1005)
R1708	1-208-911-81	s	RES, CHIP 10K (1005)
R1709	1-208-911-81	s	RES, CHIP 10K (1005)
R1710	1-208-911-81	s	RES, CHIP 10K (1005)
R1711	1-208-911-81	s	RES, CHIP 10K (1005)
R1712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1714	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1715	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1717	1-208-935-81	s	RES, CHIP 100K (1005)
R1718	1-208-911-81	s	RES, CHIP 10K (1005)
R1720	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1721	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1722	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1723	1-208-943-81	s	RES, CHIP 220K (1005)
R1724	1-208-935-81	s	RES, CHIP 100K (1005)
R1725	1-208-904-81	s	RES, CHIP 5.1K (1005)
R1726	1-208-904-81	s	RES, CHIP 5.1K (1005)
R1727	1-208-904-81	s	RES, CHIP 5.1K (1005)
R1728	1-208-911-81	s	RES, CHIP 10K (1005)
R1729	1-208-857-81	s	RES, CHIP 56 (1005)
R1730	1-208-857-81	s	RES, CHIP 56 (1005)
R1731	1-208-857-81	s	RES, CHIP 56 (1005)
R1732	1-208-857-81	s	RES, CHIP 56 (1005)
R1733	1-208-857-81	s	RES, CHIP 56 (1005)
R1734	1-208-857-81	s	RES, CHIP 56 (1005)
R1735	1-208-857-81	s	RES, CHIP 56 (1005)
R1736	1-208-857-81	s	RES, CHIP 56 (1005)
R1737	1-208-857-81	s	RES, CHIP 56 (1005)
R1738	1-208-857-81	s	RES, CHIP 56 (1005)
R1739	1-208-857-81	s	RES, CHIP 56 (1005)
R1740	1-208-857-81	s	RES, CHIP 56 (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1741	1-208-911-81	s	RES, CHIP 10K (1005)
R1801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1806	1-208-911-81	s	RES, CHIP 10K (1005)
R1807	1-208-911-81	s	RES, CHIP 10K (1005)
R1809	1-208-911-81	s	RES, CHIP 10K (1005)
R1810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1816	1-208-911-81	s	RES, CHIP 10K (1005)
R1817	1-208-911-81	s	RES, CHIP 10K (1005)
R1819	1-208-911-81	s	RES, CHIP 10K (1005)
R1821	1-220-878-81	s	RES, CHIP 22 (1005)
R1822	1-220-878-81	s	RES, CHIP 22 (1005)
R1823	1-220-878-81	s	RES, CHIP 22 (1005)
R1824	1-220-878-81	s	RES, CHIP 22 (1005)
R1825	1-220-878-81	s	RES, CHIP 22 (1005)
R1826	1-220-878-81	s	RES, CHIP 22 (1005)
R1827	1-220-878-81	s	RES, CHIP 22 (1005)
R1828	1-220-878-81	s	RES, CHIP 22 (1005)
R1829	1-208-911-81	s	RES, CHIP 10K (1005)
R1830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1835	1-208-911-81	s	RES, CHIP 10K (1005)
R1836	1-208-911-81	s	RES, CHIP 10K (1005)
R1838	1-208-911-81	s	RES, CHIP 10K (1005)
R1840	1-208-911-81	s	RES, CHIP 10K (1005)
R1842	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1845	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1847	1-208-911-81	s	RES, CHIP 10K (1005)
R1848	1-208-911-81	s	RES, CHIP 10K (1005)
R1850	1-208-911-81	s	RES, CHIP 10K (1005)
R1852	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1854	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1855	1-208-911-81	s	RES, CHIP 10K (1005)
R1902	1-208-911-81	s	RES, CHIP 10K (1005)
R1903	1-208-911-81	s	RES, CHIP 10K (1005)
R1904	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1905	1-208-911-81	s	RES, CHIP 10K (1005)
R1906	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1907	1-208-911-81	s	RES, CHIP 10K (1005)
R1908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1909	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1910	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1911	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1912	1-208-855-81	s	RES, CHIP 47 (1005)
R1913	1-208-855-81	s	RES, CHIP 47 (1005)
R1914	1-208-855-81	s	RES, CHIP 47 (1005)
R1915	1-208-855-81	s	RES, CHIP 47 (1005)
R1916	1-208-855-81	s	RES, CHIP 47 (1005)
R1917	1-208-855-81	s	RES, CHIP 47 (1005)
R1918	1-208-855-81	s	RES, CHIP 47 (1005)
R1919	1-208-855-81	s	RES, CHIP 47 (1005)
R1920	1-208-855-81	s	RES, CHIP 47 (1005)
R1921	1-208-855-81	s	RES, CHIP 47 (1005)
R1922	1-208-855-81	s	RES, CHIP 47 (1005)
R1923	1-208-855-81	s	RES, CHIP 47 (1005)
R1924	1-208-855-81	s	RES, CHIP 47 (1005)
R1925	1-208-855-81	s	RES, CHIP 47 (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1926	1-208-855-81	s	RES, CHIP 47 (1005)
R1927	1-208-855-81	s	RES, CHIP 47 (1005)
R1928	1-208-855-81	s	RES, CHIP 47 (1005)
R1930	1-208-855-81	s	RES, CHIP 47 (1005)
R1932	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1933	1-208-855-81	s	RES, CHIP 47 (1005)
R1937	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1939	1-208-911-81	s	RES, CHIP 10K (1005)
R1940	1-208-911-81	s	RES, CHIP 10K (1005)
R2001	1-208-863-81	s	RES, CHIP 100 (1005)
R2002	1-208-863-81	s	RES, CHIP 100 (1005)
R2003	1-208-863-81	s	RES, CHIP 100 (1005)
R2004	1-208-863-81	s	RES, CHIP 100 (1005)
R2101	1-208-863-81	s	RES, CHIP 100 (1005)
R2201	1-208-863-81	s	RES, CHIP 100 (1005)
R2202	1-208-863-81	s	RES, CHIP 100 (1005)
R2203	1-208-863-81	s	RES, CHIP 100 (1005)
R2204	1-208-863-81	s	RES, CHIP 100 (1005)
R2205	1-208-863-81	s	RES, CHIP 100 (1005)
R2206	1-208-863-81	s	RES, CHIP 100 (1005)
R2207	1-208-863-81	s	RES, CHIP 100 (1005)
R2208	1-208-863-81	s	RES, CHIP 100 (1005)
R2209	1-220-878-81	s	RES, CHIP 22 (1005)
R2210	1-220-878-81	s	RES, CHIP 22 (1005)
R2211	1-208-911-81	s	RES, CHIP 10K (1005)
R2212	1-208-911-81	s	RES, CHIP 10K (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-220-878-81	s	RES, CHIP 22 (1005)
R2303	1-220-878-81	s	RES, CHIP 22 (1005)
R2304	1-220-878-81	s	RES, CHIP 22 (1005)
R2305	1-220-878-81	s	RES, CHIP 22 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2336	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2338	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2340	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2342	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2344	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2345	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2346	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2347	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2348	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2349	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2401	1-208-855-81	s	RES, CHIP 47 (1005)
R2402	1-208-855-81	s	RES, CHIP 47 (1005)
R2403	1-208-855-81	s	RES, CHIP 47 (1005)
R2404	1-208-855-81	s	RES, CHIP 47 (1005)
R2405	1-208-855-81	s	RES, CHIP 47 (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2408	1-208-855-81	s	RES, CHIP 47 (1005)
R2409	1-220-878-81	s	RES, CHIP 22 (1005)
R2410	1-220-878-81	s	RES, CHIP 22 (1005)
R2413	1-208-911-81	s	RES, CHIP 10K (1005)
R2414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2417	1-208-911-81	s	RES, CHIP 10K (1005)
R2418	1-208-911-81	s	RES, CHIP 10K (1005)
R2419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2422	1-208-855-81	s	RES, CHIP 47 (1005)
R2423	1-208-855-81	s	RES, CHIP 47 (1005)
R2424	1-208-855-81	s	RES, CHIP 47 (1005)
R2425	1-208-855-81	s	RES, CHIP 47 (1005)
R2426	1-208-855-81	s	RES, CHIP 47 (1005)
R2427	1-208-855-81	s	RES, CHIP 47 (1005)
R2428	1-208-855-81	s	RES, CHIP 47 (1005)
R2429	1-208-855-81	s	RES, CHIP 47 (1005)
R2430	1-220-878-81	s	RES, CHIP 22 (1005)
R2431	1-220-878-81	s	RES, CHIP 22 (1005)
R2434	1-208-911-81	s	RES, CHIP 10K (1005)
R2435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2438	1-208-911-81	s	RES, CHIP 10K (1005)
R2439	1-208-911-81	s	RES, CHIP 10K (1005)
R2440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2443	1-208-855-81	s	RES, CHIP 47 (1005)
R2444	1-208-855-81	s	RES, CHIP 47 (1005)
R2445	1-208-855-81	s	RES, CHIP 47 (1005)
R2446	1-208-855-81	s	RES, CHIP 47 (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2501	1-208-855-81	s	RES, CHIP 47 (1005)
R2502	1-208-855-81	s	RES, CHIP 47 (1005)
R2503	1-208-855-81	s	RES, CHIP 47 (1005)
R2504	1-208-855-81	s	RES, CHIP 47 (1005)
R2505	1-208-855-81	s	RES, CHIP 47 (1005)
R2506	1-208-855-81	s	RES, CHIP 47 (1005)
R2507	1-220-878-81	s	RES, CHIP 22 (1005)
R2508	1-220-878-81	s	RES, CHIP 22 (1005)
R2509	1-220-878-81	s	RES, CHIP 22 (1005)
R2510	1-220-878-81	s	RES, CHIP 22 (1005)
R2511	1-208-855-81	s	RES, CHIP 47 (1005)
R2512	1-208-855-81	s	RES, CHIP 47 (1005)
R2513	1-208-855-81	s	RES, CHIP 47 (1005)
R2514	1-208-855-81	s	RES, CHIP 47 (1005)
R2515	1-208-863-81	s	RES, CHIP 100 (1005)
R2516	1-208-863-81	s	RES, CHIP 100 (1005)
R2517	1-208-863-81	s	RES, CHIP 100 (1005)
R2518	1-208-863-81	s	RES, CHIP 100 (1005)
R2519	1-208-863-81	s	RES, CHIP 100 (1005)
R2520	1-208-863-81	s	RES, CHIP 100 (1005)
R2521	1-208-863-81	s	RES, CHIP 100 (1005)
R2522	1-208-863-81	s	RES, CHIP 100 (1005)
R2523	1-208-863-81	s	RES, CHIP 100 (1005)
R2524	1-208-863-81	s	RES, CHIP 100 (1005)
R2525	1-208-863-81	s	RES, CHIP 100 (1005)
R2526	1-208-863-81	s	RES, CHIP 100 (1005)
R2527	1-208-863-81	s	RES, CHIP 100 (1005)
R2528	1-208-863-81	s	RES, CHIP 100 (1005)
R2529	1-208-863-81	s	RES, CHIP 100 (1005)
R2530	1-208-863-81	s	RES, CHIP 100 (1005)
R2531	1-208-863-81	s	RES, CHIP 100 (1005)
R2532	1-208-863-81	s	RES, CHIP 100 (1005)
R2533	1-208-863-81	s	RES, CHIP 100 (1005)
R2534	1-208-863-81	s	RES, CHIP 100 (1005)
R2601	1-208-855-81	s	RES, CHIP 47 (1005)
R2602	1-208-855-81	s	RES, CHIP 47 (1005)
R2603	1-208-855-81	s	RES, CHIP 47 (1005)
R2604	1-208-855-81	s	RES, CHIP 47 (1005)
R2605	1-208-855-81	s	RES, CHIP 47 (1005)
R2606	1-208-855-81	s	RES, CHIP 47 (1005)
R2607	1-220-878-81	s	RES, CHIP 22 (1005)
R2608	1-220-878-81	s	RES, CHIP 22 (1005)
R2609	1-220-878-81	s	RES, CHIP 22 (1005)
R2610	1-220-878-81	s	RES, CHIP 22 (1005)
R2611	1-208-855-81	s	RES, CHIP 47 (1005)
R2612	1-208-855-81	s	RES, CHIP 47 (1005)
R2613	1-208-855-81	s	RES, CHIP 47 (1005)
R2614	1-208-855-81	s	RES, CHIP 47 (1005)
R2615	1-208-863-81	s	RES, CHIP 100 (1005)
R2616	1-208-863-81	s	RES, CHIP 100 (1005)
R2617	1-208-863-81	s	RES, CHIP 100 (1005)
R2618	1-208-863-81	s	RES, CHIP 100 (1005)
R2619	1-208-863-81	s	RES, CHIP 100 (1005)
R2620	1-208-863-81	s	RES, CHIP 100 (1005)
R2621	1-208-863-81	s	RES, CHIP 100 (1005)
R2622	1-208-863-81	s	RES, CHIP 100 (1005)
R2623	1-208-863-81	s	RES, CHIP 100 (1005)
R2624	1-208-863-81	s	RES, CHIP 100 (1005)
R2625	1-208-863-81	s	RES, CHIP 100 (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2626	1-208-863-81	s	RES, CHIP 100 (1005)
R2627	1-208-863-81	s	RES, CHIP 100 (1005)
R2628	1-208-863-81	s	RES, CHIP 100 (1005)
R2629	1-208-863-81	s	RES, CHIP 100 (1005)
R2630	1-208-863-81	s	RES, CHIP 100 (1005)
R2631	1-208-863-81	s	RES, CHIP 100 (1005)
R2632	1-208-863-81	s	RES, CHIP 100 (1005)
R2633	1-208-863-81	s	RES, CHIP 100 (1005)
R2634	1-208-863-81	s	RES, CHIP 100 (1005)
R2703	1-208-911-81	s	RES, CHIP 10K (1005)
R2704	1-208-911-81	s	RES, CHIP 10K (1005)
R2705	1-208-911-81	s	RES, CHIP 10K (1005)
R2706	1-208-911-81	s	RES, CHIP 10K (1005)
R2707	1-208-911-81	s	RES, CHIP 10K (1005)
R2708	1-208-911-81	s	RES, CHIP 10K (1005)
R2709	1-208-911-81	s	RES, CHIP 10K (1005)
R2710	1-208-911-81	s	RES, CHIP 10K (1005)
R2711	1-208-911-81	s	RES, CHIP 10K (1005)
R2712	1-208-911-81	s	RES, CHIP 10K (1005)
R2713	1-208-911-81	s	RES, CHIP 10K (1005)
R2714	1-208-911-81	s	RES, CHIP 10K (1005)
R2715	1-208-911-81	s	RES, CHIP 10K (1005)
R2716	1-208-911-81	s	RES, CHIP 10K (1005)
R2717	1-208-911-81	s	RES, CHIP 10K (1005)
R2718	1-208-911-81	s	RES, CHIP 10K (1005)
R2719	1-208-911-81	s	RES, CHIP 10K (1005)
R2720	1-208-911-81	s	RES, CHIP 10K (1005)
R2721	1-208-911-81	s	RES, CHIP 10K (1005)
R2722	1-208-911-81	s	RES, CHIP 10K (1005)
R2723	1-208-911-81	s	RES, CHIP 10K (1005)
R2724	1-208-911-81	s	RES, CHIP 10K (1005)
R2725	1-208-911-81	s	RES, CHIP 10K (1005)
R2726	1-208-911-81	s	RES, CHIP 10K (1005)
R2727	1-208-911-81	s	RES, CHIP 10K (1005)
R2728	1-208-911-81	s	RES, CHIP 10K (1005)
R2729	1-208-911-81	s	RES, CHIP 10K (1005)
R2733	1-208-911-81	s	RES, CHIP 10K (1005)
R2734	1-208-911-81	s	RES, CHIP 10K (1005)
R2735	1-208-911-81	s	RES, CHIP 10K (1005)
R2736	1-208-911-81	s	RES, CHIP 10K (1005)
R2737	1-208-911-81	s	RES, CHIP 10K (1005)
R2738	1-208-911-81	s	RES, CHIP 10K (1005)
R2739	1-208-911-81	s	RES, CHIP 10K (1005)
R2740	1-208-911-81	s	RES, CHIP 10K (1005)
R2741	1-208-911-81	s	RES, CHIP 10K (1005)
R2742	1-208-911-81	s	RES, CHIP 10K (1005)
R2743	1-208-911-81	s	RES, CHIP 10K (1005)
R2744	1-208-911-81	s	RES, CHIP 10K (1005)
R2745	1-208-911-81	s	RES, CHIP 10K (1005)
R2746	1-208-911-81	s	RES, CHIP 10K (1005)
R2747	1-208-911-81	s	RES, CHIP 10K (1005)
R2748	1-208-911-81	s	RES, CHIP 10K (1005)
R2749	1-208-911-81	s	RES, CHIP 10K (1005)
R2750	1-208-911-81	s	RES, CHIP 10K (1005)
R2751	1-208-911-81	s	RES, CHIP 10K (1005)
R2752	1-208-911-81	s	RES, CHIP 10K (1005)
R2753	1-208-911-81	s	RES, CHIP 10K (1005)
R2754	1-208-911-81	s	RES, CHIP 10K (1005)
R2755	1-208-911-81	s	RES, CHIP 10K (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2756	1-208-911-81	s	RES, CHIP 10K (1005)
R2757	1-208-911-81	s	RES, CHIP 10K (1005)
R2758	1-208-911-81	s	RES, CHIP 10K (1005)
R2759	1-208-911-81	s	RES, CHIP 10K (1005)
R2764	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2765	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2766	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2767	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2768	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2769	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3103	1-208-911-81	s	RES, CHIP 10K (1005)
R3104	1-208-911-81	s	RES, CHIP 10K (1005)
R3105	1-208-911-81	s	RES, CHIP 10K (1005)
R3106	1-208-911-81	s	RES, CHIP 10K (1005)
R3107	1-208-911-81	s	RES, CHIP 10K (1005)
R3108	1-208-911-81	s	RES, CHIP 10K (1005)
R3109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3111	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3112	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3113	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3114	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3303	1-208-911-81	s	RES, CHIP 10K (1005)
R3304	1-208-911-81	s	RES, CHIP 10K (1005)
R3305	1-208-911-81	s	RES, CHIP 10K (1005)
R3306	1-208-911-81	s	RES, CHIP 10K (1005)
R3307	1-208-911-81	s	RES, CHIP 10K (1005)
R3308	1-208-911-81	s	RES, CHIP 10K (1005)
R3309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3311	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3312	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3313	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3314	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3503	1-208-911-81	s	RES, CHIP 10K (1005)
R3504	1-208-911-81	s	RES, CHIP 10K (1005)
R3505	1-208-911-81	s	RES, CHIP 10K (1005)
R3506	1-208-911-81	s	RES, CHIP 10K (1005)
R3507	1-208-911-81	s	RES, CHIP 10K (1005)
R3508	1-208-911-81	s	RES, CHIP 10K (1005)
R3509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3512	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3513	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3514	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3705	1-220-878-81	s	RES, CHIP 22 (1005)
R3706	1-220-878-81	s	RES, CHIP 22 (1005)
R3803	1-208-911-81	s	RES, CHIP 10K (1005)
R3805	1-208-911-81	s	RES, CHIP 10K (1005)
R3807	1-208-911-81	s	RES, CHIP 10K (1005)
R3810	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3811	1-208-911-81	s	RES, CHIP 10K (1005)
R3813	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3814	1-208-903-81	s	RES, CHIP 4.7K (1005)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3815	1-208-911-81	s	RES, CHIP 10K (1005)
R3816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3819	1-208-911-81	s	RES, CHIP 10K (1005)
R3820	1-208-911-81	s	RES, CHIP 10K (1005)
R3821	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3822	1-208-855-81	s	RES, CHIP 47 (1005)
R3823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3824	1-220-878-81	s	RES, CHIP 22 (1005)
R3903	1-208-863-81	s	RES, CHIP 100 (1005)
R3904	1-208-863-81	s	RES, CHIP 100 (1005)
R3905	1-220-878-81	s	RES, CHIP 22 (1005)
R3906	1-220-878-81	s	RES, CHIP 22 (1005)
R3907	1-220-878-81	s	RES, CHIP 22 (1005)
R3908	1-220-878-81	s	RES, CHIP 22 (1005)
R3909	1-220-878-81	s	RES, CHIP 22 (1005)
R3910	1-220-878-81	s	RES, CHIP 22 (1005)
R3911	1-220-878-81	s	RES, CHIP 22 (1005)
R3912	1-220-878-81	s	RES, CHIP 22 (1005)
R3913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3914	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3915	1-208-911-81	s	RES, CHIP 10K (1005)
R3916	1-208-911-81	s	RES, CHIP 10K (1005)
R4001	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4002	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4003	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4004	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
R4005	1-211-737-91	s	RES,SQUARE TYPE CHIP 0.47 3225
RB801	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB802	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB803	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB804	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB805	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB806	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB807	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB808	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB809	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB810	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB811	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB812	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB813	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB814	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB815	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB816	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB817	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB818	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB819	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB901	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB902	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB903	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB904	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB905	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB906	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB907	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB908	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB909	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB910	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB911	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB912	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB913	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB914	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB915	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB916	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB918	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB919	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB920	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB921	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB922	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB923	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB924	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB925	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB926	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB927	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB928	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB929	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB930	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB931	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB932	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB933	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB934	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB935	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB936	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB937	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1001	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1101	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1102	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1105	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1107	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1108	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1109	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1110	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1111	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1112	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1116	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1117	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1119	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1120	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1121	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1122	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1203	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1204	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1205	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1206	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1207	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1208	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1210	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1213	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1214	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1215	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1216	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1217	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1301	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1302	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1303	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1304	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1305	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1306	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1401	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB1402	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB1403	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB1404	1-234-380-21	s	RES, NETWORK 47K (1005X4)
RB1801	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1802	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2401	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2402	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2403	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2404	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2410	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2411	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2412	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2413	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2416	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2417	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2418	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2419	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2420	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2422	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2423	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2424	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2509	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2511	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2513	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2514	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2515	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2516	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2517	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2601	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2602	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2603	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2604	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2605	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2606	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2607	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2608	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2609	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2610	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2611	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2612	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2613	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2614	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2615	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2616	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2617	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3801	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3802	1-234-372-21	s	RES, NETWORK 100 (1005X4)
S201	1-771-721-21	s	SWITCH, TACTILE
S901	1-771-721-21	s	SWITCH, TACTILE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP304	1-535-877-22	s	CHIP, CHECKER
TP305	1-535-877-22	s	CHIP, CHECKER
TP306	1-535-877-22	s	CHIP, CHECKER
TP307	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP702	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP705	1-535-877-22	s	CHIP, CHECKER
TP706	1-535-877-22	s	CHIP, CHECKER
TP707	1-535-877-22	s	CHIP, CHECKER
TP708	1-535-877-22	s	CHIP, CHECKER
TP709	1-535-877-22	s	CHIP, CHECKER
TP710	1-535-877-22	s	CHIP, CHECKER
TP711	1-535-877-22	s	CHIP, CHECKER
TP712	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
X501	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X502	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X503	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X601	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X602	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

(OUT-33 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
X603	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X701	1-813-480-11	s	OSCILLATOR, CRYSTAL
X1701	1-795-796-11	s	VIBRATOR, CRYSTAL (24.576 MHz)

SG-272 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8328-403-A	s	MOUNTED CIRCUIT BOARD, SG-272
C100	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C101	1-115-672-21	s	CAP, ELECT 10MF
C102	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C103	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C104	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C105	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C107	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C109	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C110	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C111	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C112	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C113	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C114	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C115	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C116	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C117	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C200	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C201	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C202	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C203	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C204	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C205	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C206	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C207	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C208	1-165-908-91	s	CAP, CERAMIC 1MF B 1608
C209	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C210	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C211	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C212	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C213	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C214	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C215	1-162-928-91	s	CAP, CERAMIC 120PF CH 1608
C216	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C217	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C218	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C219	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C220	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C221	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C222	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C223	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C224	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C225	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C226	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C227	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C228	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C229	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C230	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C231	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C232	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C233	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C234	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C235	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C300	1-107-420-21	s	CAP, CHIP ELECT 47MF
C302	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C303	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C304	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608

(SG-272 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C305	1-135-347-21	s	CAP, ELECT 82MF (8X7)
C306	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C307	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C309	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C311	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C312	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C313	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C315	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C316	1-125-889-91	s	CAP, CHIP CERAMIC 2.2MF B 2012
C317	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C318	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C319	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C320	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C321	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C322	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C323	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C324	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C325	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C326	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C327	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C328	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C329	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C330	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C331	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C332	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C333	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C334	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
CN1	1-815-903-11	s	CONNECTOR, BOARD TO BOARD 40P
CN2	1-815-903-11	s	CONNECTOR, BOARD TO BOARD 40P
CN3	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-064-52	s	DIODE CL-191YG-CD-T
D101	8-719-064-52	s	DIODE CL-191YG-CD-T
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D200	8-719-064-52	s	DIODE CL-191YG-CD-T
D300	8-719-024-81	s	DIODE 1SS300-TE85L
D301	8-719-048-17	s	DIODE MBRS130LT3
D302	8-719-024-81	s	DIODE 1SS300-TE85L
D303	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
F300	⚠ 1-533-969-21	s	FUSE (SMD) (0.5A/125V)
IC100	6-700-661-01	s	IC MAX4615CUD+TG068
IC101	8-759-388-63	s	IC NJU7064V(TE2)
IC103	8-759-687-14	s	IC MAX4451EKA+TG069
IC106	8-759-398-57	s	IC LM1881MX NOPB
IC113	6-700-639-01	s	IC EP20K100ETC144-2-N
IC115	6-700-649-01	s	IC LT1720CMS8#TR
IC200	8-752-371-56	s	IC CXD1171M-TH
IC201	8-759-388-63	s	IC NJU7064V(TE2)
IC204	8-759-183-53	s	IC TL431CPK-E2
IC206	6-705-066-01	s	IC TK15405BMTB-G
IC207	8-759-389-33	s	IC 74LCX244MTCX
IC208	8-759-386-26	s	IC 74LCX574MTCX
IC300	8-759-714-00	s	IC LT1576CS8#TR
IC303	8-759-460-72	s	IC BA033FP-E2
IC305	6-710-018-01	s	IC CAT24C02WI-GT3

(SG-272 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC306	6-701-068-01	s	IC SI-3018LSA-TL
L101	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L102	1-414-521-41	s	INDUCTOR, SMALL TYPE 10.0UH
L103	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L200	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L201	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L202	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L206	1-414-396-41	s	INDUCTOR (SMD) 4.7UH
L300	1-469-530-21	s	INDUCTOR, (SMD) 47UH
Q100	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q201	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q202	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q203	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
R100	1-211-969-91	s	RES, CHIP 10 (1608)
R101	1-218-871-91	s	RES, CHIP 10K (1608)
R102	1-211-969-91	s	RES, CHIP 10 (1608)
R103	1-211-990-91	s	RES, CHIP 75 (1608)
R104	1-211-990-91	s	RES, CHIP 75 (1608)
R105	1-211-990-91	s	RES, CHIP 75 (1608)
R106	1-211-990-91	s	RES, CHIP 75 (1608)
R111	1-211-990-91	s	RES, CHIP 75 (1608)
R112	1-218-871-91	s	RES, CHIP 10K (1608)
R113	1-218-864-91	s	RES, CHIP 5.1K (1608)
R114	1-211-969-91	s	RES, CHIP 10 (1608)
R115	1-211-969-91	s	RES, CHIP 10 (1608)
R116	1-211-969-91	s	RES, CHIP 10 (1608)
R117	1-211-969-91	s	RES, CHIP 10 (1608)
R119	1-218-843-91	s	RES, CHIP 680 (1608)
R120	1-218-843-91	s	RES, CHIP 680 (1608)
R121	1-211-969-91	s	RES, CHIP 10 (1608)
R123	1-218-841-91	s	RES, CHIP 560 (1608)
R124	1-218-841-91	s	RES, CHIP 560 (1608)
R125	1-218-841-91	s	RES, CHIP 560 (1608)
R126	1-218-841-91	s	RES, CHIP 560 (1608)
R127	1-218-871-91	s	RES, CHIP 10K (1608)
R128	1-218-873-91	s	RES, CHIP 12K (1608)
R129	1-218-895-91	s	RES, CHIP 100K (1608)
R130	1-218-895-91	s	RES, CHIP 100K (1608)
R131	1-218-827-91	s	RES, CHIP 150 (1608)
R132	1-218-847-91	s	RES, CHIP 1.0K (1608)
R133	1-211-969-91	s	RES, CHIP 10 (1608)
R134	1-211-969-91	s	RES, CHIP 10 (1608)
R200	1-211-969-91	s	RES, CHIP 10 (1608)
R201	1-211-969-91	s	RES, CHIP 10 (1608)
R202	1-211-969-91	s	RES, CHIP 10 (1608)
R203	1-211-969-91	s	RES, CHIP 10 (1608)
R204	1-211-969-91	s	RES, CHIP 10 (1608)
R205	1-211-969-91	s	RES, CHIP 10 (1608)
R206	1-218-847-91	s	RES, CHIP 1.0K (1608)
R207	1-218-847-91	s	RES, CHIP 1.0K (1608)
R208	1-218-847-91	s	RES, CHIP 1.0K (1608)
R209	1-218-847-91	s	RES, CHIP 1.0K (1608)
R210	1-218-847-91	s	RES, CHIP 1.0K (1608)
R211	1-218-847-91	s	RES, CHIP 1.0K (1608)
R212	1-218-853-91	s	RES, CHIP 1.8K (1608)
R213	1-218-891-91	s	RES, CHIP 68K (1608)
R214	1-218-891-91	s	RES, CHIP 68K (1608)
R215	1-218-871-91	s	RES, CHIP 10K (1608)

(SG-272 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R219	1-218-847-91	s	RES, CHIP 1.0K (1608)
R223	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R224	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R225	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R226	1-218-855-91	s	RES, CHIP 2.2K (1608)
R227	1-218-861-91	s	RES, CHIP 3.9K (1608)
R228	1-211-986-91	s	RES, CHIP 51 (1608)
R229	1-211-969-91	s	RES, CHIP 10 (1608)
R230	1-211-969-91	s	RES, CHIP 10 (1608)
R231	1-211-969-91	s	RES, CHIP 10 (1608)
R232	1-211-986-91	s	RES, CHIP 51 (1608)
R233	1-211-969-91	s	RES, CHIP 10 (1608)
R234	1-211-969-91	s	RES, CHIP 10 (1608)
R235	1-211-969-91	s	RES, CHIP 10 (1608)
R236	1-218-871-91	s	RES, CHIP 10K (1608)
R237	1-211-990-91	s	RES, CHIP 75 (1608)
R238	1-211-969-91	s	RES, CHIP 10 (1608)
R239	1-218-843-91	s	RES, CHIP 680 (1608)
R240	1-218-871-91	s	RES, CHIP 10K (1608)
R243	1-218-871-91	s	RES, CHIP 10K (1608)
R244	1-218-847-91	s	RES, CHIP 1.0K (1608)
R245	1-218-847-91	s	RES, CHIP 1.0K (1608)
R246	1-218-847-91	s	RES, CHIP 1.0K (1608)
R300	1-218-847-91	s	RES, CHIP 1.0K (1608)
R301	1-218-878-91	s	RES, CHIP 20K (1608)
R302	1-218-871-91	s	RES, CHIP 10K (1608)
R303	1-218-847-91	s	RES, CHIP 1.0K (1608)
R304	1-218-876-91	s	RES, CHIP 16K (1608)
R305	1-218-864-91	s	RES, CHIP 5.1K (1608)
R307	1-218-847-91	s	RES, CHIP 1.0K (1608)
R308	1-211-969-91	s	RES, CHIP 10 (1608)
R309	1-211-969-91	s	RES, CHIP 10 (1608)
R312	1-218-857-91	s	RES, CHIP 2.7K (1608)
RB200	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB201	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB202	1-233-574-21	s	RES, CHIP NETWORK 10 (3216)
RB300	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB302	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
X200	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X201	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X202	1-813-285-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

SIO-26A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1276-367-A	s	MOUNTED CIRCUIT BOARD, SIO-26A
C100	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C101	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C102	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C103	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C104	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C105	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C106	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C400	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C401	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C403	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C404	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C405	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C406	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C407	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C408	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C409	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C424	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C425	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C426	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C500	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C501	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C502	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C503	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C504	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C505	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C506	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C507	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C510	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C512	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C514	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C516	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
CN400	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN500	1-564-013-11	o	PIN, CONNECTOR 3P
CN501	1-564-013-11	o	PIN, CONNECTOR 3P
D200	8-719-064-52	s	DIODE CL-191YG-CD-T
D201	8-719-064-52	s	DIODE CL-191YG-CD-T
D202	8-719-064-52	s	DIODE CL-191YG-CD-T
E402	1-535-877-22	s	CHIP, CHECKER
E403	1-535-877-22	s	CHIP, CHECKER
E404	1-535-877-22	s	CHIP, CHECKER
IC100	8-759-549-15	s	IC SN74LV245APWR
IC101	8-759-549-15	s	IC SN74LV245APWR
IC102	8-759-549-15	s	IC SN74LV245APWR
IC103	8-759-549-15	s	IC SN74LV245APWR
IC401	6-700-655-01	s	IC LT1963ES8#TR

(SIO-26A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC410	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC411	8-759-679-55	s	IC SN74LVC08APWR
IC500	6-701-874-01	s	IC IDT71V016SA15PHG-TL
IC501	6-701-874-01	s	IC IDT71V016SA15PHG-TL
IC502	8-759-524-77	s	IC RN5VD21AA-TL-FA
IC503	8-759-450-42	s	IC MAX3222CAP+TG068
IC505	6-708-425-01	s	IC S29AL008D70TFI010
R102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R200	1-216-833-91	s	RES, CHIP 10K (1608)
R201	1-216-833-91	s	RES, CHIP 10K (1608)
R202	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R203	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R300	1-216-833-91	s	RES, CHIP 10K (1608)
R301	1-216-833-91	s	RES, CHIP 10K (1608)
R302	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R400	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R401	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R402	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R403	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R404	1-218-833-91	s	RES, CHIP 270 (1608)
R405	1-218-855-91	s	RES, CHIP 2.2K (1608)
R406	1-218-855-91	s	RES, CHIP 2.2K (1608)
R415	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R416	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R417	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R418	1-216-833-91	s	RES, CHIP 10K (1608)
R419	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R420	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R421	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R422	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R500	1-218-871-91	s	RES, CHIP 10K (1608)
R501	1-216-833-91	s	RES, CHIP 10K (1608)
R503	1-216-833-91	s	RES, CHIP 10K (1608)
RB100	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB101	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB102	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB103	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB104	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB105	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB106	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB200	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB400	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB401	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB402	1-234-523-21	s	CONDUCTOR, NETWORK 1608X4
RB500	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
S300	1-692-270-41	s	SWITCH, SLIDE
S500	1-572-595-21	s	SWITCH, TACTILE (REFLOW TYPE)
TP100	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
X400	1-795-176-21	s	OSCILLATOR, CRYSTAL

XPT-29 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1217-386-A	s	MOUNTED CIRCUIT BOARD, XPT-29
10pcs	3-703-249-02	s	SCREW, S TIGHT, +PTTWH 3X6
2pcs	7-626-300-54	s	SPRING PIN 3X6
C1	1-137-894-21	s	CAP, CHIP ELECT 470MF
C2	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C3	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C4	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C5	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C6	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C7	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C8	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C9	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C10	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C12	1-100-986-21	s	CAP, ELECT 330MF
C13	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C14	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C15	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C21	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C22	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C51	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C52	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C101	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C210	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C302	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C318	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C319	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C320	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4019	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4020	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4021	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4022	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4023	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4024	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4025	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4026	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4027	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4028	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4029	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4030	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4047	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4049	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4050	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4051	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4052	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4053	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4054	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4055	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4056	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4057	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4058	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4059	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4060	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4119	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4120	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4121	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4122	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4123	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4124	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4125	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4126	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4127	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4128	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4129	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4130	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4149	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4150	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4151	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4152	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4153	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4154	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4155	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4156	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4157	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4158	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4159	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4160	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4219	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4220	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4221	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4222	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4223	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4224	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4225	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4226	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4227	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4228	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4229	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4230	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4243	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4244	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4245	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4246	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4247	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4248	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4249	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C4250	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5019	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5020	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5021	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5022	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5023	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5024	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5025	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5026	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5027	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5028	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5029	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5030	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5047	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5049	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5050	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5051	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5052	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5053	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5054	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5055	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5056	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5057	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5058	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5059	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5060	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5119	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5120	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5121	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5122	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5123	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5124	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5125	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5126	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5127	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5128	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5129	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5130	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5149	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5150	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5151	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5152	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5153	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5154	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5155	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5156	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5157	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5158	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5159	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5160	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5219	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5220	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5221	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5222	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5223	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5224	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5225	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5226	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5227	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5228	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5229	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5230	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5243	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5244	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5245	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C5246	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5247	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5248	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5249	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C5250	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
CN501	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	8-719-069-28	s	DIODE 1SS400TE-61
D2	8-719-069-28	s	DIODE 1SS400TE-61
D3	8-719-074-31	s	DIODE CL-196YG-CD-T
D51	8-719-074-31	s	DIODE CL-196YG-CD-T
D52	8-719-074-31	s	DIODE CL-196YG-CD-T
D53	8-719-074-31	s	DIODE CL-196YG-CD-T
D54	8-719-074-31	s	DIODE CL-196YG-CD-T
D201	8-719-077-09	s	DIODE CL-196HR-CD-T
DD1	1-480-011-11	s	CONVERTER, DC-DC
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC11	6-700-655-01	s	IC LT1963ES8#TR
IC12	6-700-655-01	s	IC LT1963ES8#TR
IC13	6-700-655-01	s	IC LT1963ES8#TR
IC51	8-759-338-95	s	IC NJM2903V(TE2)
IC52	8-759-338-95	s	IC NJM2903V(TE2)
IC101	8-759-592-46	s	IC TC7SZ05FU(TE85R)
IC102	6-708-324-01	s	IC R3112N301A-TR-FA
IC103	8-759-639-86	s	IC SN65LVDS32DR
IC104	8-759-639-86	s	IC SN65LVDS32DR
IC105	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC106	8-759-392-77	s	IC SN74LVC245APWR
IC107	6-700-804-01	s	IC SN74LVC574APWR
IC201	8-759-598-43	s	IC TC7WH04FK(TE85R)
IC301	8-759-392-81	s	IC SN74LVC16245ADGGR
IC302	8-759-392-81	s	IC SN74LVC16245ADGGR
IC303	8-759-392-81	s	IC SN74LVC16245ADGGR
IC304	6-710-018-01	s	IC CAT24C02WI-GT3
IC305	6-708-016-01	s	IC LM75BIMX-3/NOPB
IC306	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC401	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC501	8-759-392-77	s	IC SN74LVC245APWR
IC1001	6-702-535-01	s	IC MC100LVEL11DTR2
IC1002	6-702-535-01	s	IC MC100LVEL11DTR2
IC1003	6-702-535-01	s	IC MC100LVEL11DTR2
IC1004	6-702-535-01	s	IC MC100LVEL11DTR2
IC1005	6-702-535-01	s	IC MC100LVEL11DTR2
IC1006	6-702-535-01	s	IC MC100LVEL11DTR2
IC1101	6-702-535-01	s	IC MC100LVEL11DTR2
IC1102	6-702-535-01	s	IC MC100LVEL11DTR2
IC1103	6-702-535-01	s	IC MC100LVEL11DTR2

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1104	6-702-535-01	s	IC MC100LVEL11DTR2
IC1105	6-702-535-01	s	IC MC100LVEL11DTR2
IC1106	6-702-535-01	s	IC MC100LVEL11DTR2
IC1201	6-702-535-01	s	IC MC100LVEL11DTR2
IC1202	6-702-535-01	s	IC MC100LVEL11DTR2
IC1203	6-702-535-01	s	IC MC100LVEL11DTR2
IC1204	6-702-535-01	s	IC MC100LVEL11DTR2
IC1205	6-702-535-01	s	IC MC100LVEL11DTR2
IC1206	6-702-535-01	s	IC MC100LVEL11DTR2
IC1301	6-702-535-01	s	IC MC100LVEL11DTR2
IC1302	6-702-535-01	s	IC MC100LVEL11DTR2
IC1303	6-702-535-01	s	IC MC100LVEL11DTR2
IC1304	6-702-535-01	s	IC MC100LVEL11DTR2
IC1305	6-702-535-01	s	IC MC100LVEL11DTR2
IC1306	6-702-535-01	s	IC MC100LVEL11DTR2
IC1401	6-702-535-01	s	IC MC100LVEL11DTR2
IC1402	6-702-535-01	s	IC MC100LVEL11DTR2
IC1403	6-702-535-01	s	IC MC100LVEL11DTR2
IC1404	6-702-535-01	s	IC MC100LVEL11DTR2
IC1405	6-702-535-01	s	IC MC100LVEL11DTR2
IC1406	6-702-535-01	s	IC MC100LVEL11DTR2
IC1501	6-702-535-01	s	IC MC100LVEL11DTR2
IC1502	6-702-535-01	s	IC MC100LVEL11DTR2
IC1503	6-702-535-01	s	IC MC100LVEL11DTR2
IC1504	6-702-535-01	s	IC MC100LVEL11DTR2
IC2001	6-702-535-01	s	IC MC100LVEL11DTR2
IC2002	6-702-535-01	s	IC MC100LVEL11DTR2
IC2003	6-702-535-01	s	IC MC100LVEL11DTR2
IC2004	6-702-535-01	s	IC MC100LVEL11DTR2
IC2005	6-702-535-01	s	IC MC100LVEL11DTR2
IC2006	6-702-535-01	s	IC MC100LVEL11DTR2
IC2101	6-702-535-01	s	IC MC100LVEL11DTR2
IC2102	6-702-535-01	s	IC MC100LVEL11DTR2
IC2103	6-702-535-01	s	IC MC100LVEL11DTR2
IC2104	6-702-535-01	s	IC MC100LVEL11DTR2
IC2105	6-702-535-01	s	IC MC100LVEL11DTR2
IC2106	6-702-535-01	s	IC MC100LVEL11DTR2
IC2201	6-702-535-01	s	IC MC100LVEL11DTR2
IC2202	6-702-535-01	s	IC MC100LVEL11DTR2
IC2203	6-702-535-01	s	IC MC100LVEL11DTR2
IC2204	6-702-535-01	s	IC MC100LVEL11DTR2
IC2205	6-702-535-01	s	IC MC100LVEL11DTR2
IC2206	6-702-535-01	s	IC MC100LVEL11DTR2
IC2301	6-702-535-01	s	IC MC100LVEL11DTR2
IC2302	6-702-535-01	s	IC MC100LVEL11DTR2
IC2303	6-702-535-01	s	IC MC100LVEL11DTR2
IC2304	6-702-535-01	s	IC MC100LVEL11DTR2
IC2305	6-702-535-01	s	IC MC100LVEL11DTR2
IC2306	6-702-535-01	s	IC MC100LVEL11DTR2
IC2401	6-702-535-01	s	IC MC100LVEL11DTR2
IC2402	6-702-535-01	s	IC MC100LVEL11DTR2
IC2403	6-702-535-01	s	IC MC100LVEL11DTR2
IC2404	6-702-535-01	s	IC MC100LVEL11DTR2
IC2405	6-702-535-01	s	IC MC100LVEL11DTR2
IC2406	6-702-535-01	s	IC MC100LVEL11DTR2
IC2501	6-702-535-01	s	IC MC100LVEL11DTR2
IC2502	6-702-535-01	s	IC MC100LVEL11DTR2
IC2503	6-702-535-01	s	IC MC100LVEL11DTR2
IC2504	6-702-535-01	s	IC MC100LVEL11DTR2

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC4001	6-700-641-01	s	IC MC10EP56DTR2
IC4002	6-700-641-01	s	IC MC10EP56DTR2
IC4003	6-700-641-01	s	IC MC10EP56DTR2
IC4004	6-700-641-01	s	IC MC10EP56DTR2
IC4005	6-700-641-01	s	IC MC10EP56DTR2
IC4006	6-700-641-01	s	IC MC10EP56DTR2
IC4101	6-700-641-01	s	IC MC10EP56DTR2
IC4102	6-700-641-01	s	IC MC10EP56DTR2
IC4103	6-700-641-01	s	IC MC10EP56DTR2
IC4104	6-700-641-01	s	IC MC10EP56DTR2
IC4105	6-700-641-01	s	IC MC10EP56DTR2
IC4106	6-700-641-01	s	IC MC10EP56DTR2
IC4201	6-700-641-01	s	IC MC10EP56DTR2
IC4202	6-700-641-01	s	IC MC10EP56DTR2
IC4203	6-700-641-01	s	IC MC10EP56DTR2
IC4204	6-700-641-01	s	IC MC10EP56DTR2
IC4205	6-700-641-01	s	IC MC10EP56DTR2
IC5001	6-700-641-01	s	IC MC10EP56DTR2
IC5002	6-700-641-01	s	IC MC10EP56DTR2
IC5003	6-700-641-01	s	IC MC10EP56DTR2
IC5004	6-700-641-01	s	IC MC10EP56DTR2
IC5005	6-700-641-01	s	IC MC10EP56DTR2
IC5006	6-700-641-01	s	IC MC10EP56DTR2
IC5101	6-700-641-01	s	IC MC10EP56DTR2
IC5102	6-700-641-01	s	IC MC10EP56DTR2
IC5103	6-700-641-01	s	IC MC10EP56DTR2
IC5104	6-700-641-01	s	IC MC10EP56DTR2
IC5105	6-700-641-01	s	IC MC10EP56DTR2
IC5106	6-700-641-01	s	IC MC10EP56DTR2
IC5201	6-700-641-01	s	IC MC10EP56DTR2
IC5202	6-700-641-01	s	IC MC10EP56DTR2
IC5203	6-700-641-01	s	IC MC10EP56DTR2
IC5204	6-700-641-01	s	IC MC10EP56DTR2
IC5205	6-700-641-01	s	IC MC10EP56DTR2
Q1	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q2	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q51	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q52	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q53	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q54	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q55	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q56	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q57	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q58	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3	1-208-895-81	s	RES, CHIP 2.2K (1005)
R4	1-208-943-81	s	RES, CHIP 220K (1005)
R5	1-208-943-81	s	RES, CHIP 220K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-911-81	s	RES, CHIP 10K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-911-81	s	RES, CHIP 10K (1005)
R11	1-208-887-81	s	RES, CHIP 1.0K (1005)
R12	1-208-895-81	s	RES, CHIP 2.2K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-911-81	s	RES, CHIP 10K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-911-81	s	RES, CHIP 10K (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R17	1-208-911-81	s	RES, CHIP 10K (1005)
R18	1-208-911-81	s	RES, CHIP 10K (1005)
R19	1-208-927-81	s	RES, CHIP 47K (1005)
R21	1-208-943-81	s	RES, CHIP 220K (1005)
R23	1-208-943-81	s	RES, CHIP 220K (1005)
R26	1-208-903-81	s	RES, CHIP 4.7K (1005)
R27	1-208-903-81	s	RES, CHIP 4.7K (1005)
R28	1-208-903-81	s	RES, CHIP 4.7K (1005)
R29	1-208-903-81	s	RES, CHIP 4.7K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R51	1-208-911-81	s	RES, CHIP 10K (1005)
R52	1-208-903-81	s	RES, CHIP 4.7K (1005)
R53	1-208-887-81	s	RES, CHIP 1.0K (1005)
R54	1-208-911-81	s	RES, CHIP 10K (1005)
R55	1-208-903-81	s	RES, CHIP 4.7K (1005)
R56	1-208-911-81	s	RES, CHIP 10K (1005)
R57	1-208-935-81	s	RES, CHIP 100K (1005)
R58	1-208-911-81	s	RES, CHIP 10K (1005)
R59	1-208-903-81	s	RES, CHIP 4.7K (1005)
R60	1-208-895-81	s	RES, CHIP 2.2K (1005)
R61	1-208-911-81	s	RES, CHIP 10K (1005)
R62	1-208-903-81	s	RES, CHIP 4.7K (1005)
R63	1-208-911-81	s	RES, CHIP 10K (1005)
R64	1-208-935-81	s	RES, CHIP 100K (1005)
R65	1-208-911-81	s	RES, CHIP 10K (1005)
R66	1-208-903-81	s	RES, CHIP 4.7K (1005)
R67	1-208-895-81	s	RES, CHIP 2.2K (1005)
R68	1-208-903-81	s	RES, CHIP 4.7K (1005)
R69	1-208-911-81	s	RES, CHIP 10K (1005)
R70	1-208-935-81	s	RES, CHIP 100K (1005)
R71	1-208-911-81	s	RES, CHIP 10K (1005)
R72	1-208-903-81	s	RES, CHIP 4.7K (1005)
R73	1-208-895-81	s	RES, CHIP 2.2K (1005)
R74	1-208-919-81	s	RES, CHIP 22K (1005)
R75	1-208-911-81	s	RES, CHIP 10K (1005)
R76	1-208-935-81	s	RES, CHIP 100K (1005)
R77	1-208-911-81	s	RES, CHIP 10K (1005)
R78	1-208-903-81	s	RES, CHIP 4.7K (1005)
R79	1-208-895-81	s	RES, CHIP 2.2K (1005)
R101	1-208-903-81	s	RES, CHIP 4.7K (1005)
R102	1-208-863-81	s	RES, CHIP 100 (1005)
R103	1-208-863-81	s	RES, CHIP 100 (1005)
R104	1-208-863-81	s	RES, CHIP 100 (1005)
R105	1-208-863-81	s	RES, CHIP 100 (1005)
R106	1-208-863-81	s	RES, CHIP 100 (1005)
R107	1-208-863-81	s	RES, CHIP 100 (1005)
R108	1-220-878-81	s	RES, CHIP 22 (1005)
R109	1-220-878-81	s	RES, CHIP 22 (1005)
R110	1-220-878-81	s	RES, CHIP 22 (1005)
R111	1-220-878-81	s	RES, CHIP 22 (1005)
R112	1-220-878-81	s	RES, CHIP 22 (1005)
R113	1-220-878-81	s	RES, CHIP 22 (1005)
R114	1-208-887-81	s	RES, CHIP 1.0K (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)
R203	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R207	1-220-878-81	s	RES, CHIP 22 (1005)
R208	1-220-878-81	s	RES, CHIP 22 (1005)
R209	1-220-878-81	s	RES, CHIP 22 (1005)
R210	1-220-878-81	s	RES, CHIP 22 (1005)
R211	1-220-878-81	s	RES, CHIP 22 (1005)
R212	1-220-878-81	s	RES, CHIP 22 (1005)
R213	1-220-878-81	s	RES, CHIP 22 (1005)
R214	1-220-878-81	s	RES, CHIP 22 (1005)
R215	1-220-878-81	s	RES, CHIP 22 (1005)
R216	1-220-878-81	s	RES, CHIP 22 (1005)
R217	1-220-878-81	s	RES, CHIP 22 (1005)
R218	1-208-911-81	s	RES, CHIP 10K (1005)
R219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-911-81	s	RES, CHIP 10K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-911-81	s	RES, CHIP 10K (1005)
R226	1-208-911-81	s	RES, CHIP 10K (1005)
R227	1-208-911-81	s	RES, CHIP 10K (1005)
R228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R229	1-220-878-81	s	RES, CHIP 22 (1005)
R230	1-220-878-81	s	RES, CHIP 22 (1005)
R231	1-220-878-81	s	RES, CHIP 22 (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R237	1-208-935-81	s	RES, CHIP 100K (1005)
R238	1-208-935-81	s	RES, CHIP 100K (1005)
R239	1-208-935-81	s	RES, CHIP 100K (1005)
R240	1-208-935-81	s	RES, CHIP 100K (1005)
R241	1-208-935-81	s	RES, CHIP 100K (1005)
R242	1-208-935-81	s	RES, CHIP 100K (1005)
R243	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-208-935-81	s	RES, CHIP 100K (1005)
R247	1-208-935-81	s	RES, CHIP 100K (1005)
R248	1-220-878-81	s	RES, CHIP 22 (1005)
R249	1-220-878-81	s	RES, CHIP 22 (1005)
R250	1-220-878-81	s	RES, CHIP 22 (1005)
R301	1-220-878-81	s	RES, CHIP 22 (1005)
R302	1-220-878-81	s	RES, CHIP 22 (1005)
R303	1-220-878-81	s	RES, CHIP 22 (1005)
R304	1-220-878-81	s	RES, CHIP 22 (1005)
R305	1-220-878-81	s	RES, CHIP 22 (1005)
R306	1-220-878-81	s	RES, CHIP 22 (1005)
R307	1-208-935-81	s	RES, CHIP 100K (1005)
R308	1-208-935-81	s	RES, CHIP 100K (1005)
R309	1-208-935-81	s	RES, CHIP 100K (1005)
R311	1-208-935-81	s	RES, CHIP 100K (1005)
R313	1-208-935-81	s	RES, CHIP 100K (1005)
R315	1-208-935-81	s	RES, CHIP 100K (1005)
R317	1-208-935-81	s	RES, CHIP 100K (1005)
R402	1-220-878-81	s	RES, CHIP 22 (1005)
R403	1-220-878-81	s	RES, CHIP 22 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R404	1-220-878-81	s	RES, CHIP 22 (1005)
R405	1-220-878-81	s	RES, CHIP 22 (1005)
R406	1-220-878-81	s	RES, CHIP 22 (1005)
R407	1-220-878-81	s	RES, CHIP 22 (1005)
R408	1-220-878-81	s	RES, CHIP 22 (1005)
R409	1-220-878-81	s	RES, CHIP 22 (1005)
R410	1-220-878-81	s	RES, CHIP 22 (1005)
R411	1-220-878-81	s	RES, CHIP 22 (1005)
R412	1-220-878-81	s	RES, CHIP 22 (1005)
R413	1-220-878-81	s	RES, CHIP 22 (1005)
R414	1-220-878-81	s	RES, CHIP 22 (1005)
R415	1-220-878-81	s	RES, CHIP 22 (1005)
R416	1-220-878-81	s	RES, CHIP 22 (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R419	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)
R421	1-220-878-81	s	RES, CHIP 22 (1005)
R422	1-220-878-81	s	RES, CHIP 22 (1005)
R423	1-220-878-81	s	RES, CHIP 22 (1005)
R424	1-220-878-81	s	RES, CHIP 22 (1005)
R425	1-220-878-81	s	RES, CHIP 22 (1005)
R426	1-220-878-81	s	RES, CHIP 22 (1005)
R427	1-220-878-81	s	RES, CHIP 22 (1005)
R428	1-208-911-81	s	RES, CHIP 10K (1005)
R429	1-208-855-81	s	RES, CHIP 47 (1005)
R430	1-208-855-81	s	RES, CHIP 47 (1005)
R431	1-208-855-81	s	RES, CHIP 47 (1005)
R432	1-208-855-81	s	RES, CHIP 47 (1005)
R433	1-208-855-81	s	RES, CHIP 47 (1005)
R434	1-208-855-81	s	RES, CHIP 47 (1005)
R435	1-208-855-81	s	RES, CHIP 47 (1005)
R436	1-208-855-81	s	RES, CHIP 47 (1005)
R437	1-208-855-81	s	RES, CHIP 47 (1005)
R438	1-208-855-81	s	RES, CHIP 47 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-208-855-81	s	RES, CHIP 47 (1005)
R441	1-208-855-81	s	RES, CHIP 47 (1005)
R442	1-208-855-81	s	RES, CHIP 47 (1005)
R443	1-208-855-81	s	RES, CHIP 47 (1005)
R444	1-208-855-81	s	RES, CHIP 47 (1005)
R445	1-208-855-81	s	RES, CHIP 47 (1005)
R446	1-208-855-81	s	RES, CHIP 47 (1005)
R447	1-208-855-81	s	RES, CHIP 47 (1005)
R448	1-208-855-81	s	RES, CHIP 47 (1005)
R449	1-208-855-81	s	RES, CHIP 47 (1005)
R450	1-208-855-81	s	RES, CHIP 47 (1005)
R451	1-208-855-81	s	RES, CHIP 47 (1005)
R452	1-208-855-81	s	RES, CHIP 47 (1005)
R453	1-208-855-81	s	RES, CHIP 47 (1005)
R454	1-208-855-81	s	RES, CHIP 47 (1005)
R455	1-208-855-81	s	RES, CHIP 47 (1005)
R456	1-208-855-81	s	RES, CHIP 47 (1005)
R457	1-208-855-81	s	RES, CHIP 47 (1005)
R458	1-208-855-81	s	RES, CHIP 47 (1005)
R459	1-208-855-81	s	RES, CHIP 47 (1005)
R460	1-208-855-81	s	RES, CHIP 47 (1005)
R461	1-208-855-81	s	RES, CHIP 47 (1005)
R462	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R463	1-208-855-81	s	RES, CHIP 47 (1005)
R464	1-208-855-81	s	RES, CHIP 47 (1005)
R465	1-208-855-81	s	RES, CHIP 47 (1005)
R466	1-208-855-81	s	RES, CHIP 47 (1005)
R467	1-208-855-81	s	RES, CHIP 47 (1005)
R468	1-208-855-81	s	RES, CHIP 47 (1005)
R469	1-208-855-81	s	RES, CHIP 47 (1005)
R470	1-208-855-81	s	RES, CHIP 47 (1005)
R471	1-208-855-81	s	RES, CHIP 47 (1005)
R472	1-208-855-81	s	RES, CHIP 47 (1005)
R473	1-208-855-81	s	RES, CHIP 47 (1005)
R474	1-208-855-81	s	RES, CHIP 47 (1005)
R475	1-208-855-81	s	RES, CHIP 47 (1005)
R476	1-208-855-81	s	RES, CHIP 47 (1005)
R477	1-208-855-81	s	RES, CHIP 47 (1005)
R478	1-208-855-81	s	RES, CHIP 47 (1005)
R479	1-208-855-81	s	RES, CHIP 47 (1005)
R480	1-208-855-81	s	RES, CHIP 47 (1005)
R481	1-208-855-81	s	RES, CHIP 47 (1005)
R482	1-208-855-81	s	RES, CHIP 47 (1005)
R483	1-208-855-81	s	RES, CHIP 47 (1005)
R484	1-208-855-81	s	RES, CHIP 47 (1005)
R485	1-208-855-81	s	RES, CHIP 47 (1005)
R486	1-208-855-81	s	RES, CHIP 47 (1005)
R487	1-208-855-81	s	RES, CHIP 47 (1005)
R488	1-208-855-81	s	RES, CHIP 47 (1005)
R489	1-208-855-81	s	RES, CHIP 47 (1005)
R490	1-208-855-81	s	RES, CHIP 47 (1005)
R491	1-208-855-81	s	RES, CHIP 47 (1005)
R492	1-208-855-81	s	RES, CHIP 47 (1005)
R493	1-208-855-81	s	RES, CHIP 47 (1005)
R494	1-208-855-81	s	RES, CHIP 47 (1005)
R495	1-208-855-81	s	RES, CHIP 47 (1005)
R496	1-208-855-81	s	RES, CHIP 47 (1005)
R497	1-208-855-81	s	RES, CHIP 47 (1005)
R501	1-208-887-81	s	RES, CHIP 1.0K (1005)
R502	1-208-887-81	s	RES, CHIP 1.0K (1005)
R503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R504	1-208-887-81	s	RES, CHIP 1.0K (1005)
R505	1-208-887-81	s	RES, CHIP 1.0K (1005)
R506	1-208-887-81	s	RES, CHIP 1.0K (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-208-855-81	s	RES, CHIP 47 (1005)
R509	1-208-855-81	s	RES, CHIP 47 (1005)
R510	1-208-855-81	s	RES, CHIP 47 (1005)
R511	1-208-855-81	s	RES, CHIP 47 (1005)
R512	1-208-855-81	s	RES, CHIP 47 (1005)
R513	1-208-855-81	s	RES, CHIP 47 (1005)
R514	1-208-855-81	s	RES, CHIP 47 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-855-81	s	RES, CHIP 47 (1005)
R1001	1-208-855-81	s	RES, CHIP 47 (1005)
R1002	1-208-855-81	s	RES, CHIP 47 (1005)
R1003	1-208-855-81	s	RES, CHIP 47 (1005)
R1004	1-208-855-81	s	RES, CHIP 47 (1005)
R1005	1-208-855-81	s	RES, CHIP 47 (1005)
R1006	1-208-855-81	s	RES, CHIP 47 (1005)
R1007	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1008	1-208-855-81	s	RES, CHIP 47 (1005)
R1009	1-208-855-81	s	RES, CHIP 47 (1005)
R1010	1-208-855-81	s	RES, CHIP 47 (1005)
R1011	1-208-855-81	s	RES, CHIP 47 (1005)
R1012	1-208-855-81	s	RES, CHIP 47 (1005)
R1013	1-208-875-81	s	RES, CHIP 330 (1005)
R1014	1-208-875-81	s	RES, CHIP 330 (1005)
R1015	1-208-875-81	s	RES, CHIP 330 (1005)
R1016	1-208-875-81	s	RES, CHIP 330 (1005)
R1017	1-208-875-81	s	RES, CHIP 330 (1005)
R1018	1-208-875-81	s	RES, CHIP 330 (1005)
R1019	1-208-875-81	s	RES, CHIP 330 (1005)
R1020	1-208-875-81	s	RES, CHIP 330 (1005)
R1021	1-208-875-81	s	RES, CHIP 330 (1005)
R1022	1-208-875-81	s	RES, CHIP 330 (1005)
R1023	1-208-875-81	s	RES, CHIP 330 (1005)
R1024	1-208-875-81	s	RES, CHIP 330 (1005)
R1025	1-208-875-81	s	RES, CHIP 330 (1005)
R1026	1-208-875-81	s	RES, CHIP 330 (1005)
R1027	1-208-875-81	s	RES, CHIP 330 (1005)
R1028	1-208-875-81	s	RES, CHIP 330 (1005)
R1029	1-208-875-81	s	RES, CHIP 330 (1005)
R1030	1-208-875-81	s	RES, CHIP 330 (1005)
R1031	1-208-875-81	s	RES, CHIP 330 (1005)
R1032	1-208-875-81	s	RES, CHIP 330 (1005)
R1033	1-208-875-81	s	RES, CHIP 330 (1005)
R1034	1-208-875-81	s	RES, CHIP 330 (1005)
R1035	1-208-875-81	s	RES, CHIP 330 (1005)
R1036	1-208-875-81	s	RES, CHIP 330 (1005)
R1037	1-220-870-81	s	RES, CHIP 10 (1005)
R1038	1-220-870-81	s	RES, CHIP 10 (1005)
R1039	1-220-870-81	s	RES, CHIP 10 (1005)
R1040	1-220-870-81	s	RES, CHIP 10 (1005)
R1041	1-220-870-81	s	RES, CHIP 10 (1005)
R1042	1-220-870-81	s	RES, CHIP 10 (1005)
R1043	1-220-870-81	s	RES, CHIP 10 (1005)
R1044	1-220-870-81	s	RES, CHIP 10 (1005)
R1045	1-220-870-81	s	RES, CHIP 10 (1005)
R1046	1-220-870-81	s	RES, CHIP 10 (1005)
R1047	1-220-870-81	s	RES, CHIP 10 (1005)
R1048	1-220-870-81	s	RES, CHIP 10 (1005)
R1049	1-220-870-81	s	RES, CHIP 10 (1005)
R1050	1-220-870-81	s	RES, CHIP 10 (1005)
R1051	1-220-870-81	s	RES, CHIP 10 (1005)
R1052	1-220-870-81	s	RES, CHIP 10 (1005)
R1053	1-220-870-81	s	RES, CHIP 10 (1005)
R1054	1-220-870-81	s	RES, CHIP 10 (1005)
R1055	1-220-870-81	s	RES, CHIP 10 (1005)
R1056	1-220-870-81	s	RES, CHIP 10 (1005)
R1057	1-220-870-81	s	RES, CHIP 10 (1005)
R1058	1-220-870-81	s	RES, CHIP 10 (1005)
R1059	1-220-870-81	s	RES, CHIP 10 (1005)
R1060	1-220-870-81	s	RES, CHIP 10 (1005)
R1101	1-208-855-81	s	RES, CHIP 47 (1005)
R1102	1-208-855-81	s	RES, CHIP 47 (1005)
R1103	1-208-855-81	s	RES, CHIP 47 (1005)
R1104	1-208-855-81	s	RES, CHIP 47 (1005)
R1105	1-208-855-81	s	RES, CHIP 47 (1005)
R1106	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1107	1-208-855-81	s	RES, CHIP 47 (1005)
R1108	1-208-855-81	s	RES, CHIP 47 (1005)
R1109	1-208-855-81	s	RES, CHIP 47 (1005)
R1110	1-208-855-81	s	RES, CHIP 47 (1005)
R1111	1-208-855-81	s	RES, CHIP 47 (1005)
R1112	1-208-855-81	s	RES, CHIP 47 (1005)
R1113	1-208-875-81	s	RES, CHIP 330 (1005)
R1114	1-208-875-81	s	RES, CHIP 330 (1005)
R1115	1-208-875-81	s	RES, CHIP 330 (1005)
R1116	1-208-875-81	s	RES, CHIP 330 (1005)
R1117	1-208-875-81	s	RES, CHIP 330 (1005)
R1118	1-208-875-81	s	RES, CHIP 330 (1005)
R1119	1-208-875-81	s	RES, CHIP 330 (1005)
R1120	1-208-875-81	s	RES, CHIP 330 (1005)
R1121	1-208-875-81	s	RES, CHIP 330 (1005)
R1122	1-208-875-81	s	RES, CHIP 330 (1005)
R1123	1-208-875-81	s	RES, CHIP 330 (1005)
R1124	1-208-875-81	s	RES, CHIP 330 (1005)
R1125	1-208-875-81	s	RES, CHIP 330 (1005)
R1126	1-208-875-81	s	RES, CHIP 330 (1005)
R1127	1-208-875-81	s	RES, CHIP 330 (1005)
R1128	1-208-875-81	s	RES, CHIP 330 (1005)
R1129	1-208-875-81	s	RES, CHIP 330 (1005)
R1130	1-208-875-81	s	RES, CHIP 330 (1005)
R1131	1-208-875-81	s	RES, CHIP 330 (1005)
R1132	1-208-875-81	s	RES, CHIP 330 (1005)
R1133	1-208-875-81	s	RES, CHIP 330 (1005)
R1134	1-208-875-81	s	RES, CHIP 330 (1005)
R1135	1-208-875-81	s	RES, CHIP 330 (1005)
R1136	1-208-875-81	s	RES, CHIP 330 (1005)
R1137	1-220-870-81	s	RES, CHIP 10 (1005)
R1138	1-220-870-81	s	RES, CHIP 10 (1005)
R1139	1-220-870-81	s	RES, CHIP 10 (1005)
R1140	1-220-870-81	s	RES, CHIP 10 (1005)
R1141	1-220-870-81	s	RES, CHIP 10 (1005)
R1142	1-220-870-81	s	RES, CHIP 10 (1005)
R1143	1-220-870-81	s	RES, CHIP 10 (1005)
R1144	1-220-870-81	s	RES, CHIP 10 (1005)
R1145	1-220-870-81	s	RES, CHIP 10 (1005)
R1146	1-220-870-81	s	RES, CHIP 10 (1005)
R1147	1-220-870-81	s	RES, CHIP 10 (1005)
R1148	1-220-870-81	s	RES, CHIP 10 (1005)
R1149	1-220-870-81	s	RES, CHIP 10 (1005)
R1150	1-220-870-81	s	RES, CHIP 10 (1005)
R1151	1-220-870-81	s	RES, CHIP 10 (1005)
R1152	1-220-870-81	s	RES, CHIP 10 (1005)
R1153	1-220-870-81	s	RES, CHIP 10 (1005)
R1154	1-220-870-81	s	RES, CHIP 10 (1005)
R1155	1-220-870-81	s	RES, CHIP 10 (1005)
R1156	1-220-870-81	s	RES, CHIP 10 (1005)
R1157	1-220-870-81	s	RES, CHIP 10 (1005)
R1158	1-220-870-81	s	RES, CHIP 10 (1005)
R1159	1-220-870-81	s	RES, CHIP 10 (1005)
R1160	1-220-870-81	s	RES, CHIP 10 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-208-855-81	s	RES, CHIP 47 (1005)
R1204	1-208-855-81	s	RES, CHIP 47 (1005)
R1205	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1206	1-208-855-81	s	RES, CHIP 47 (1005)
R1207	1-208-855-81	s	RES, CHIP 47 (1005)
R1208	1-208-855-81	s	RES, CHIP 47 (1005)
R1209	1-208-855-81	s	RES, CHIP 47 (1005)
R1210	1-208-855-81	s	RES, CHIP 47 (1005)
R1211	1-208-855-81	s	RES, CHIP 47 (1005)
R1212	1-208-855-81	s	RES, CHIP 47 (1005)
R1213	1-208-875-81	s	RES, CHIP 330 (1005)
R1214	1-208-875-81	s	RES, CHIP 330 (1005)
R1215	1-208-875-81	s	RES, CHIP 330 (1005)
R1216	1-208-875-81	s	RES, CHIP 330 (1005)
R1217	1-208-875-81	s	RES, CHIP 330 (1005)
R1218	1-208-875-81	s	RES, CHIP 330 (1005)
R1219	1-208-875-81	s	RES, CHIP 330 (1005)
R1220	1-208-875-81	s	RES, CHIP 330 (1005)
R1221	1-208-875-81	s	RES, CHIP 330 (1005)
R1222	1-208-875-81	s	RES, CHIP 330 (1005)
R1223	1-208-875-81	s	RES, CHIP 330 (1005)
R1224	1-208-875-81	s	RES, CHIP 330 (1005)
R1225	1-208-875-81	s	RES, CHIP 330 (1005)
R1226	1-208-875-81	s	RES, CHIP 330 (1005)
R1227	1-208-875-81	s	RES, CHIP 330 (1005)
R1228	1-208-875-81	s	RES, CHIP 330 (1005)
R1229	1-208-875-81	s	RES, CHIP 330 (1005)
R1230	1-208-875-81	s	RES, CHIP 330 (1005)
R1231	1-208-875-81	s	RES, CHIP 330 (1005)
R1232	1-208-875-81	s	RES, CHIP 330 (1005)
R1233	1-208-875-81	s	RES, CHIP 330 (1005)
R1234	1-208-875-81	s	RES, CHIP 330 (1005)
R1235	1-208-875-81	s	RES, CHIP 330 (1005)
R1236	1-208-875-81	s	RES, CHIP 330 (1005)
R1237	1-220-870-81	s	RES, CHIP 10 (1005)
R1238	1-220-870-81	s	RES, CHIP 10 (1005)
R1239	1-220-870-81	s	RES, CHIP 10 (1005)
R1240	1-220-870-81	s	RES, CHIP 10 (1005)
R1241	1-220-870-81	s	RES, CHIP 10 (1005)
R1242	1-220-870-81	s	RES, CHIP 10 (1005)
R1243	1-220-870-81	s	RES, CHIP 10 (1005)
R1244	1-220-870-81	s	RES, CHIP 10 (1005)
R1245	1-220-870-81	s	RES, CHIP 10 (1005)
R1246	1-220-870-81	s	RES, CHIP 10 (1005)
R1247	1-220-870-81	s	RES, CHIP 10 (1005)
R1248	1-220-870-81	s	RES, CHIP 10 (1005)
R1249	1-220-870-81	s	RES, CHIP 10 (1005)
R1250	1-220-870-81	s	RES, CHIP 10 (1005)
R1251	1-220-870-81	s	RES, CHIP 10 (1005)
R1252	1-220-870-81	s	RES, CHIP 10 (1005)
R1253	1-220-870-81	s	RES, CHIP 10 (1005)
R1254	1-220-870-81	s	RES, CHIP 10 (1005)
R1255	1-220-870-81	s	RES, CHIP 10 (1005)
R1256	1-220-870-81	s	RES, CHIP 10 (1005)
R1257	1-220-870-81	s	RES, CHIP 10 (1005)
R1258	1-220-870-81	s	RES, CHIP 10 (1005)
R1259	1-220-870-81	s	RES, CHIP 10 (1005)
R1260	1-220-870-81	s	RES, CHIP 10 (1005)
R1301	1-208-855-81	s	RES, CHIP 47 (1005)
R1302	1-208-855-81	s	RES, CHIP 47 (1005)
R1303	1-208-855-81	s	RES, CHIP 47 (1005)
R1304	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1305	1-208-855-81	s	RES, CHIP 47 (1005)
R1306	1-208-855-81	s	RES, CHIP 47 (1005)
R1307	1-208-855-81	s	RES, CHIP 47 (1005)
R1308	1-208-855-81	s	RES, CHIP 47 (1005)
R1309	1-208-855-81	s	RES, CHIP 47 (1005)
R1310	1-208-855-81	s	RES, CHIP 47 (1005)
R1311	1-208-855-81	s	RES, CHIP 47 (1005)
R1312	1-208-855-81	s	RES, CHIP 47 (1005)
R1313	1-208-875-81	s	RES, CHIP 330 (1005)
R1314	1-208-875-81	s	RES, CHIP 330 (1005)
R1315	1-208-875-81	s	RES, CHIP 330 (1005)
R1316	1-208-875-81	s	RES, CHIP 330 (1005)
R1317	1-208-875-81	s	RES, CHIP 330 (1005)
R1318	1-208-875-81	s	RES, CHIP 330 (1005)
R1319	1-208-875-81	s	RES, CHIP 330 (1005)
R1320	1-208-875-81	s	RES, CHIP 330 (1005)
R1321	1-208-875-81	s	RES, CHIP 330 (1005)
R1322	1-208-875-81	s	RES, CHIP 330 (1005)
R1323	1-208-875-81	s	RES, CHIP 330 (1005)
R1324	1-208-875-81	s	RES, CHIP 330 (1005)
R1325	1-208-875-81	s	RES, CHIP 330 (1005)
R1326	1-208-875-81	s	RES, CHIP 330 (1005)
R1327	1-208-875-81	s	RES, CHIP 330 (1005)
R1328	1-208-875-81	s	RES, CHIP 330 (1005)
R1329	1-208-875-81	s	RES, CHIP 330 (1005)
R1330	1-208-875-81	s	RES, CHIP 330 (1005)
R1331	1-208-875-81	s	RES, CHIP 330 (1005)
R1332	1-208-875-81	s	RES, CHIP 330 (1005)
R1333	1-208-875-81	s	RES, CHIP 330 (1005)
R1334	1-208-875-81	s	RES, CHIP 330 (1005)
R1335	1-208-875-81	s	RES, CHIP 330 (1005)
R1336	1-208-875-81	s	RES, CHIP 330 (1005)
R1337	1-220-870-81	s	RES, CHIP 10 (1005)
R1338	1-220-870-81	s	RES, CHIP 10 (1005)
R1339	1-220-870-81	s	RES, CHIP 10 (1005)
R1340	1-220-870-81	s	RES, CHIP 10 (1005)
R1341	1-220-870-81	s	RES, CHIP 10 (1005)
R1342	1-220-870-81	s	RES, CHIP 10 (1005)
R1343	1-220-870-81	s	RES, CHIP 10 (1005)
R1344	1-220-870-81	s	RES, CHIP 10 (1005)
R1345	1-220-870-81	s	RES, CHIP 10 (1005)
R1346	1-220-870-81	s	RES, CHIP 10 (1005)
R1347	1-220-870-81	s	RES, CHIP 10 (1005)
R1348	1-220-870-81	s	RES, CHIP 10 (1005)
R1349	1-220-870-81	s	RES, CHIP 10 (1005)
R1350	1-220-870-81	s	RES, CHIP 10 (1005)
R1351	1-220-870-81	s	RES, CHIP 10 (1005)
R1352	1-220-870-81	s	RES, CHIP 10 (1005)
R1353	1-220-870-81	s	RES, CHIP 10 (1005)
R1354	1-220-870-81	s	RES, CHIP 10 (1005)
R1355	1-220-870-81	s	RES, CHIP 10 (1005)
R1356	1-220-870-81	s	RES, CHIP 10 (1005)
R1357	1-220-870-81	s	RES, CHIP 10 (1005)
R1358	1-220-870-81	s	RES, CHIP 10 (1005)
R1359	1-220-870-81	s	RES, CHIP 10 (1005)
R1360	1-220-870-81	s	RES, CHIP 10 (1005)
R1401	1-208-855-81	s	RES, CHIP 47 (1005)
R1402	1-208-855-81	s	RES, CHIP 47 (1005)
R1403	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1404	1-208-855-81	s	RES, CHIP 47 (1005)
R1405	1-208-855-81	s	RES, CHIP 47 (1005)
R1406	1-208-855-81	s	RES, CHIP 47 (1005)
R1407	1-208-855-81	s	RES, CHIP 47 (1005)
R1408	1-208-855-81	s	RES, CHIP 47 (1005)
R1409	1-208-855-81	s	RES, CHIP 47 (1005)
R1410	1-208-855-81	s	RES, CHIP 47 (1005)
R1411	1-208-855-81	s	RES, CHIP 47 (1005)
R1412	1-208-855-81	s	RES, CHIP 47 (1005)
R1413	1-208-875-81	s	RES, CHIP 330 (1005)
R1414	1-208-875-81	s	RES, CHIP 330 (1005)
R1415	1-208-875-81	s	RES, CHIP 330 (1005)
R1416	1-208-875-81	s	RES, CHIP 330 (1005)
R1417	1-208-875-81	s	RES, CHIP 330 (1005)
R1418	1-208-875-81	s	RES, CHIP 330 (1005)
R1419	1-208-875-81	s	RES, CHIP 330 (1005)
R1420	1-208-875-81	s	RES, CHIP 330 (1005)
R1421	1-208-875-81	s	RES, CHIP 330 (1005)
R1422	1-208-875-81	s	RES, CHIP 330 (1005)
R1423	1-208-875-81	s	RES, CHIP 330 (1005)
R1424	1-208-875-81	s	RES, CHIP 330 (1005)
R1425	1-208-875-81	s	RES, CHIP 330 (1005)
R1426	1-208-875-81	s	RES, CHIP 330 (1005)
R1427	1-208-875-81	s	RES, CHIP 330 (1005)
R1428	1-208-875-81	s	RES, CHIP 330 (1005)
R1429	1-208-875-81	s	RES, CHIP 330 (1005)
R1430	1-208-875-81	s	RES, CHIP 330 (1005)
R1431	1-208-875-81	s	RES, CHIP 330 (1005)
R1432	1-208-875-81	s	RES, CHIP 330 (1005)
R1433	1-208-875-81	s	RES, CHIP 330 (1005)
R1434	1-208-875-81	s	RES, CHIP 330 (1005)
R1435	1-208-875-81	s	RES, CHIP 330 (1005)
R1436	1-208-875-81	s	RES, CHIP 330 (1005)
R1437	1-220-870-81	s	RES, CHIP 10 (1005)
R1438	1-220-870-81	s	RES, CHIP 10 (1005)
R1439	1-220-870-81	s	RES, CHIP 10 (1005)
R1440	1-220-870-81	s	RES, CHIP 10 (1005)
R1441	1-220-870-81	s	RES, CHIP 10 (1005)
R1442	1-220-870-81	s	RES, CHIP 10 (1005)
R1443	1-220-870-81	s	RES, CHIP 10 (1005)
R1444	1-220-870-81	s	RES, CHIP 10 (1005)
R1445	1-220-870-81	s	RES, CHIP 10 (1005)
R1446	1-220-870-81	s	RES, CHIP 10 (1005)
R1447	1-220-870-81	s	RES, CHIP 10 (1005)
R1448	1-220-870-81	s	RES, CHIP 10 (1005)
R1449	1-220-870-81	s	RES, CHIP 10 (1005)
R1450	1-220-870-81	s	RES, CHIP 10 (1005)
R1451	1-220-870-81	s	RES, CHIP 10 (1005)
R1452	1-220-870-81	s	RES, CHIP 10 (1005)
R1453	1-220-870-81	s	RES, CHIP 10 (1005)
R1454	1-220-870-81	s	RES, CHIP 10 (1005)
R1455	1-220-870-81	s	RES, CHIP 10 (1005)
R1456	1-220-870-81	s	RES, CHIP 10 (1005)
R1457	1-220-870-81	s	RES, CHIP 10 (1005)
R1458	1-220-870-81	s	RES, CHIP 10 (1005)
R1459	1-220-870-81	s	RES, CHIP 10 (1005)
R1460	1-220-870-81	s	RES, CHIP 10 (1005)
R1501	1-208-855-81	s	RES, CHIP 47 (1005)
R1502	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1503	1-208-855-81	s	RES, CHIP 47 (1005)
R1504	1-208-855-81	s	RES, CHIP 47 (1005)
R1505	1-208-855-81	s	RES, CHIP 47 (1005)
R1506	1-208-855-81	s	RES, CHIP 47 (1005)
R1507	1-208-855-81	s	RES, CHIP 47 (1005)
R1508	1-208-855-81	s	RES, CHIP 47 (1005)
R1509	1-208-875-81	s	RES, CHIP 330 (1005)
R1510	1-208-875-81	s	RES, CHIP 330 (1005)
R1511	1-208-875-81	s	RES, CHIP 330 (1005)
R1512	1-208-875-81	s	RES, CHIP 330 (1005)
R1513	1-208-875-81	s	RES, CHIP 330 (1005)
R1514	1-208-875-81	s	RES, CHIP 330 (1005)
R1515	1-208-875-81	s	RES, CHIP 330 (1005)
R1516	1-208-875-81	s	RES, CHIP 330 (1005)
R1517	1-208-875-81	s	RES, CHIP 330 (1005)
R1518	1-208-875-81	s	RES, CHIP 330 (1005)
R1519	1-208-875-81	s	RES, CHIP 330 (1005)
R1520	1-208-875-81	s	RES, CHIP 330 (1005)
R1521	1-208-875-81	s	RES, CHIP 330 (1005)
R1522	1-208-875-81	s	RES, CHIP 330 (1005)
R1523	1-208-875-81	s	RES, CHIP 330 (1005)
R1524	1-208-875-81	s	RES, CHIP 330 (1005)
R1525	1-220-870-81	s	RES, CHIP 10 (1005)
R1526	1-220-870-81	s	RES, CHIP 10 (1005)
R1527	1-220-870-81	s	RES, CHIP 10 (1005)
R1528	1-220-870-81	s	RES, CHIP 10 (1005)
R1529	1-220-870-81	s	RES, CHIP 10 (1005)
R1530	1-220-870-81	s	RES, CHIP 10 (1005)
R1531	1-220-870-81	s	RES, CHIP 10 (1005)
R1532	1-220-870-81	s	RES, CHIP 10 (1005)
R1533	1-220-870-81	s	RES, CHIP 10 (1005)
R1534	1-220-870-81	s	RES, CHIP 10 (1005)
R1535	1-220-870-81	s	RES, CHIP 10 (1005)
R1536	1-220-870-81	s	RES, CHIP 10 (1005)
R1537	1-220-870-81	s	RES, CHIP 10 (1005)
R1538	1-220-870-81	s	RES, CHIP 10 (1005)
R1539	1-220-870-81	s	RES, CHIP 10 (1005)
R1540	1-220-870-81	s	RES, CHIP 10 (1005)
R2001	1-208-855-81	s	RES, CHIP 47 (1005)
R2002	1-208-855-81	s	RES, CHIP 47 (1005)
R2003	1-208-855-81	s	RES, CHIP 47 (1005)
R2004	1-208-855-81	s	RES, CHIP 47 (1005)
R2005	1-208-855-81	s	RES, CHIP 47 (1005)
R2006	1-208-855-81	s	RES, CHIP 47 (1005)
R2007	1-208-855-81	s	RES, CHIP 47 (1005)
R2008	1-208-855-81	s	RES, CHIP 47 (1005)
R2009	1-208-855-81	s	RES, CHIP 47 (1005)
R2010	1-208-855-81	s	RES, CHIP 47 (1005)
R2011	1-208-855-81	s	RES, CHIP 47 (1005)
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-875-81	s	RES, CHIP 330 (1005)
R2014	1-208-875-81	s	RES, CHIP 330 (1005)
R2015	1-208-875-81	s	RES, CHIP 330 (1005)
R2016	1-208-875-81	s	RES, CHIP 330 (1005)
R2017	1-208-875-81	s	RES, CHIP 330 (1005)
R2018	1-208-875-81	s	RES, CHIP 330 (1005)
R2019	1-208-875-81	s	RES, CHIP 330 (1005)
R2020	1-208-875-81	s	RES, CHIP 330 (1005)
R2021	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2022	1-208-875-81	s	RES, CHIP 330 (1005)
R2023	1-208-875-81	s	RES, CHIP 330 (1005)
R2024	1-208-875-81	s	RES, CHIP 330 (1005)
R2025	1-208-875-81	s	RES, CHIP 330 (1005)
R2026	1-208-875-81	s	RES, CHIP 330 (1005)
R2027	1-208-875-81	s	RES, CHIP 330 (1005)
R2028	1-208-875-81	s	RES, CHIP 330 (1005)
R2029	1-208-875-81	s	RES, CHIP 330 (1005)
R2030	1-208-875-81	s	RES, CHIP 330 (1005)
R2031	1-208-875-81	s	RES, CHIP 330 (1005)
R2032	1-208-875-81	s	RES, CHIP 330 (1005)
R2033	1-208-875-81	s	RES, CHIP 330 (1005)
R2034	1-208-875-81	s	RES, CHIP 330 (1005)
R2035	1-208-875-81	s	RES, CHIP 330 (1005)
R2036	1-208-875-81	s	RES, CHIP 330 (1005)
R2037	1-220-870-81	s	RES, CHIP 10 (1005)
R2038	1-220-870-81	s	RES, CHIP 10 (1005)
R2039	1-220-870-81	s	RES, CHIP 10 (1005)
R2040	1-220-870-81	s	RES, CHIP 10 (1005)
R2041	1-220-870-81	s	RES, CHIP 10 (1005)
R2042	1-220-870-81	s	RES, CHIP 10 (1005)
R2043	1-220-870-81	s	RES, CHIP 10 (1005)
R2044	1-220-870-81	s	RES, CHIP 10 (1005)
R2045	1-220-870-81	s	RES, CHIP 10 (1005)
R2046	1-220-870-81	s	RES, CHIP 10 (1005)
R2047	1-220-870-81	s	RES, CHIP 10 (1005)
R2048	1-220-870-81	s	RES, CHIP 10 (1005)
R2049	1-220-870-81	s	RES, CHIP 10 (1005)
R2050	1-220-870-81	s	RES, CHIP 10 (1005)
R2051	1-220-870-81	s	RES, CHIP 10 (1005)
R2052	1-220-870-81	s	RES, CHIP 10 (1005)
R2053	1-220-870-81	s	RES, CHIP 10 (1005)
R2054	1-220-870-81	s	RES, CHIP 10 (1005)
R2055	1-220-870-81	s	RES, CHIP 10 (1005)
R2056	1-220-870-81	s	RES, CHIP 10 (1005)
R2057	1-220-870-81	s	RES, CHIP 10 (1005)
R2058	1-220-870-81	s	RES, CHIP 10 (1005)
R2059	1-220-870-81	s	RES, CHIP 10 (1005)
R2060	1-220-870-81	s	RES, CHIP 10 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-208-855-81	s	RES, CHIP 47 (1005)
R2107	1-208-855-81	s	RES, CHIP 47 (1005)
R2108	1-208-855-81	s	RES, CHIP 47 (1005)
R2109	1-208-855-81	s	RES, CHIP 47 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-875-81	s	RES, CHIP 330 (1005)
R2114	1-208-875-81	s	RES, CHIP 330 (1005)
R2115	1-208-875-81	s	RES, CHIP 330 (1005)
R2116	1-208-875-81	s	RES, CHIP 330 (1005)
R2117	1-208-875-81	s	RES, CHIP 330 (1005)
R2118	1-208-875-81	s	RES, CHIP 330 (1005)
R2119	1-208-875-81	s	RES, CHIP 330 (1005)
R2120	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2121	1-208-875-81	s	RES, CHIP 330 (1005)
R2122	1-208-875-81	s	RES, CHIP 330 (1005)
R2123	1-208-875-81	s	RES, CHIP 330 (1005)
R2124	1-208-875-81	s	RES, CHIP 330 (1005)
R2125	1-208-875-81	s	RES, CHIP 330 (1005)
R2126	1-208-875-81	s	RES, CHIP 330 (1005)
R2127	1-208-875-81	s	RES, CHIP 330 (1005)
R2128	1-208-875-81	s	RES, CHIP 330 (1005)
R2129	1-208-875-81	s	RES, CHIP 330 (1005)
R2130	1-208-875-81	s	RES, CHIP 330 (1005)
R2131	1-208-875-81	s	RES, CHIP 330 (1005)
R2132	1-208-875-81	s	RES, CHIP 330 (1005)
R2133	1-208-875-81	s	RES, CHIP 330 (1005)
R2134	1-208-875-81	s	RES, CHIP 330 (1005)
R2135	1-208-875-81	s	RES, CHIP 330 (1005)
R2136	1-208-875-81	s	RES, CHIP 330 (1005)
R2137	1-220-870-81	s	RES, CHIP 10 (1005)
R2138	1-220-870-81	s	RES, CHIP 10 (1005)
R2139	1-220-870-81	s	RES, CHIP 10 (1005)
R2140	1-220-870-81	s	RES, CHIP 10 (1005)
R2141	1-220-870-81	s	RES, CHIP 10 (1005)
R2142	1-220-870-81	s	RES, CHIP 10 (1005)
R2143	1-220-870-81	s	RES, CHIP 10 (1005)
R2144	1-220-870-81	s	RES, CHIP 10 (1005)
R2145	1-220-870-81	s	RES, CHIP 10 (1005)
R2146	1-220-870-81	s	RES, CHIP 10 (1005)
R2147	1-220-870-81	s	RES, CHIP 10 (1005)
R2148	1-220-870-81	s	RES, CHIP 10 (1005)
R2149	1-220-870-81	s	RES, CHIP 10 (1005)
R2150	1-220-870-81	s	RES, CHIP 10 (1005)
R2151	1-220-870-81	s	RES, CHIP 10 (1005)
R2152	1-220-870-81	s	RES, CHIP 10 (1005)
R2153	1-220-870-81	s	RES, CHIP 10 (1005)
R2154	1-220-870-81	s	RES, CHIP 10 (1005)
R2155	1-220-870-81	s	RES, CHIP 10 (1005)
R2156	1-220-870-81	s	RES, CHIP 10 (1005)
R2157	1-220-870-81	s	RES, CHIP 10 (1005)
R2158	1-220-870-81	s	RES, CHIP 10 (1005)
R2159	1-220-870-81	s	RES, CHIP 10 (1005)
R2160	1-220-870-81	s	RES, CHIP 10 (1005)
R2201	1-208-855-81	s	RES, CHIP 47 (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-855-81	s	RES, CHIP 47 (1005)
R2205	1-208-855-81	s	RES, CHIP 47 (1005)
R2206	1-208-855-81	s	RES, CHIP 47 (1005)
R2207	1-208-855-81	s	RES, CHIP 47 (1005)
R2208	1-208-855-81	s	RES, CHIP 47 (1005)
R2209	1-208-855-81	s	RES, CHIP 47 (1005)
R2210	1-208-855-81	s	RES, CHIP 47 (1005)
R2211	1-208-855-81	s	RES, CHIP 47 (1005)
R2212	1-208-855-81	s	RES, CHIP 47 (1005)
R2213	1-208-875-81	s	RES, CHIP 330 (1005)
R2214	1-208-875-81	s	RES, CHIP 330 (1005)
R2215	1-208-875-81	s	RES, CHIP 330 (1005)
R2216	1-208-875-81	s	RES, CHIP 330 (1005)
R2217	1-208-875-81	s	RES, CHIP 330 (1005)
R2218	1-208-875-81	s	RES, CHIP 330 (1005)
R2219	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2220	1-208-875-81	s	RES, CHIP 330 (1005)
R2221	1-208-875-81	s	RES, CHIP 330 (1005)
R2222	1-208-875-81	s	RES, CHIP 330 (1005)
R2223	1-208-875-81	s	RES, CHIP 330 (1005)
R2224	1-208-875-81	s	RES, CHIP 330 (1005)
R2225	1-208-875-81	s	RES, CHIP 330 (1005)
R2226	1-208-875-81	s	RES, CHIP 330 (1005)
R2227	1-208-875-81	s	RES, CHIP 330 (1005)
R2228	1-208-875-81	s	RES, CHIP 330 (1005)
R2229	1-208-875-81	s	RES, CHIP 330 (1005)
R2230	1-208-875-81	s	RES, CHIP 330 (1005)
R2231	1-208-875-81	s	RES, CHIP 330 (1005)
R2232	1-208-875-81	s	RES, CHIP 330 (1005)
R2233	1-208-875-81	s	RES, CHIP 330 (1005)
R2234	1-208-875-81	s	RES, CHIP 330 (1005)
R2235	1-208-875-81	s	RES, CHIP 330 (1005)
R2236	1-208-875-81	s	RES, CHIP 330 (1005)
R2237	1-220-870-81	s	RES, CHIP 10 (1005)
R2238	1-220-870-81	s	RES, CHIP 10 (1005)
R2239	1-220-870-81	s	RES, CHIP 10 (1005)
R2240	1-220-870-81	s	RES, CHIP 10 (1005)
R2241	1-220-870-81	s	RES, CHIP 10 (1005)
R2242	1-220-870-81	s	RES, CHIP 10 (1005)
R2243	1-220-870-81	s	RES, CHIP 10 (1005)
R2244	1-220-870-81	s	RES, CHIP 10 (1005)
R2245	1-220-870-81	s	RES, CHIP 10 (1005)
R2246	1-220-870-81	s	RES, CHIP 10 (1005)
R2247	1-220-870-81	s	RES, CHIP 10 (1005)
R2248	1-220-870-81	s	RES, CHIP 10 (1005)
R2249	1-220-870-81	s	RES, CHIP 10 (1005)
R2250	1-220-870-81	s	RES, CHIP 10 (1005)
R2251	1-220-870-81	s	RES, CHIP 10 (1005)
R2252	1-220-870-81	s	RES, CHIP 10 (1005)
R2253	1-220-870-81	s	RES, CHIP 10 (1005)
R2254	1-220-870-81	s	RES, CHIP 10 (1005)
R2255	1-220-870-81	s	RES, CHIP 10 (1005)
R2256	1-220-870-81	s	RES, CHIP 10 (1005)
R2257	1-220-870-81	s	RES, CHIP 10 (1005)
R2258	1-220-870-81	s	RES, CHIP 10 (1005)
R2259	1-220-870-81	s	RES, CHIP 10 (1005)
R2260	1-220-870-81	s	RES, CHIP 10 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-208-855-81	s	RES, CHIP 47 (1005)
R2307	1-208-855-81	s	RES, CHIP 47 (1005)
R2308	1-208-855-81	s	RES, CHIP 47 (1005)
R2309	1-208-855-81	s	RES, CHIP 47 (1005)
R2310	1-208-855-81	s	RES, CHIP 47 (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-855-81	s	RES, CHIP 47 (1005)
R2313	1-208-875-81	s	RES, CHIP 330 (1005)
R2314	1-208-875-81	s	RES, CHIP 330 (1005)
R2315	1-208-875-81	s	RES, CHIP 330 (1005)
R2316	1-208-875-81	s	RES, CHIP 330 (1005)
R2317	1-208-875-81	s	RES, CHIP 330 (1005)
R2318	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2319	1-208-875-81	s	RES, CHIP 330 (1005)
R2320	1-208-875-81	s	RES, CHIP 330 (1005)
R2321	1-208-875-81	s	RES, CHIP 330 (1005)
R2322	1-208-875-81	s	RES, CHIP 330 (1005)
R2323	1-208-875-81	s	RES, CHIP 330 (1005)
R2324	1-208-875-81	s	RES, CHIP 330 (1005)
R2325	1-208-875-81	s	RES, CHIP 330 (1005)
R2326	1-208-875-81	s	RES, CHIP 330 (1005)
R2327	1-208-875-81	s	RES, CHIP 330 (1005)
R2328	1-208-875-81	s	RES, CHIP 330 (1005)
R2329	1-208-875-81	s	RES, CHIP 330 (1005)
R2330	1-208-875-81	s	RES, CHIP 330 (1005)
R2331	1-208-875-81	s	RES, CHIP 330 (1005)
R2332	1-208-875-81	s	RES, CHIP 330 (1005)
R2333	1-208-875-81	s	RES, CHIP 330 (1005)
R2334	1-208-875-81	s	RES, CHIP 330 (1005)
R2335	1-208-875-81	s	RES, CHIP 330 (1005)
R2336	1-208-875-81	s	RES, CHIP 330 (1005)
R2337	1-220-870-81	s	RES, CHIP 10 (1005)
R2338	1-220-870-81	s	RES, CHIP 10 (1005)
R2339	1-220-870-81	s	RES, CHIP 10 (1005)
R2340	1-220-870-81	s	RES, CHIP 10 (1005)
R2341	1-220-870-81	s	RES, CHIP 10 (1005)
R2342	1-220-870-81	s	RES, CHIP 10 (1005)
R2343	1-220-870-81	s	RES, CHIP 10 (1005)
R2344	1-220-870-81	s	RES, CHIP 10 (1005)
R2345	1-220-870-81	s	RES, CHIP 10 (1005)
R2346	1-220-870-81	s	RES, CHIP 10 (1005)
R2347	1-220-870-81	s	RES, CHIP 10 (1005)
R2348	1-220-870-81	s	RES, CHIP 10 (1005)
R2349	1-220-870-81	s	RES, CHIP 10 (1005)
R2350	1-220-870-81	s	RES, CHIP 10 (1005)
R2351	1-220-870-81	s	RES, CHIP 10 (1005)
R2352	1-220-870-81	s	RES, CHIP 10 (1005)
R2353	1-220-870-81	s	RES, CHIP 10 (1005)
R2354	1-220-870-81	s	RES, CHIP 10 (1005)
R2355	1-220-870-81	s	RES, CHIP 10 (1005)
R2356	1-220-870-81	s	RES, CHIP 10 (1005)
R2357	1-220-870-81	s	RES, CHIP 10 (1005)
R2358	1-220-870-81	s	RES, CHIP 10 (1005)
R2359	1-220-870-81	s	RES, CHIP 10 (1005)
R2360	1-220-870-81	s	RES, CHIP 10 (1005)
R2401	1-208-855-81	s	RES, CHIP 47 (1005)
R2402	1-208-855-81	s	RES, CHIP 47 (1005)
R2403	1-208-855-81	s	RES, CHIP 47 (1005)
R2404	1-208-855-81	s	RES, CHIP 47 (1005)
R2405	1-208-855-81	s	RES, CHIP 47 (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2408	1-208-855-81	s	RES, CHIP 47 (1005)
R2409	1-208-855-81	s	RES, CHIP 47 (1005)
R2410	1-208-855-81	s	RES, CHIP 47 (1005)
R2411	1-208-855-81	s	RES, CHIP 47 (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-875-81	s	RES, CHIP 330 (1005)
R2414	1-208-875-81	s	RES, CHIP 330 (1005)
R2415	1-208-875-81	s	RES, CHIP 330 (1005)
R2416	1-208-875-81	s	RES, CHIP 330 (1005)
R2417	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2418	1-208-875-81	s	RES, CHIP 330 (1005)
R2419	1-208-875-81	s	RES, CHIP 330 (1005)
R2420	1-208-875-81	s	RES, CHIP 330 (1005)
R2421	1-208-875-81	s	RES, CHIP 330 (1005)
R2422	1-208-875-81	s	RES, CHIP 330 (1005)
R2423	1-208-875-81	s	RES, CHIP 330 (1005)
R2424	1-208-875-81	s	RES, CHIP 330 (1005)
R2425	1-208-875-81	s	RES, CHIP 330 (1005)
R2426	1-208-875-81	s	RES, CHIP 330 (1005)
R2427	1-208-875-81	s	RES, CHIP 330 (1005)
R2428	1-208-875-81	s	RES, CHIP 330 (1005)
R2429	1-208-875-81	s	RES, CHIP 330 (1005)
R2430	1-208-875-81	s	RES, CHIP 330 (1005)
R2431	1-208-875-81	s	RES, CHIP 330 (1005)
R2432	1-208-875-81	s	RES, CHIP 330 (1005)
R2433	1-208-875-81	s	RES, CHIP 330 (1005)
R2434	1-208-875-81	s	RES, CHIP 330 (1005)
R2435	1-208-875-81	s	RES, CHIP 330 (1005)
R2436	1-208-875-81	s	RES, CHIP 330 (1005)
R2437	1-220-870-81	s	RES, CHIP 10 (1005)
R2438	1-220-870-81	s	RES, CHIP 10 (1005)
R2439	1-220-870-81	s	RES, CHIP 10 (1005)
R2440	1-220-870-81	s	RES, CHIP 10 (1005)
R2441	1-220-870-81	s	RES, CHIP 10 (1005)
R2442	1-220-870-81	s	RES, CHIP 10 (1005)
R2443	1-220-870-81	s	RES, CHIP 10 (1005)
R2444	1-220-870-81	s	RES, CHIP 10 (1005)
R2445	1-220-870-81	s	RES, CHIP 10 (1005)
R2446	1-220-870-81	s	RES, CHIP 10 (1005)
R2447	1-220-870-81	s	RES, CHIP 10 (1005)
R2448	1-220-870-81	s	RES, CHIP 10 (1005)
R2449	1-220-870-81	s	RES, CHIP 10 (1005)
R2450	1-220-870-81	s	RES, CHIP 10 (1005)
R2451	1-220-870-81	s	RES, CHIP 10 (1005)
R2452	1-220-870-81	s	RES, CHIP 10 (1005)
R2453	1-220-870-81	s	RES, CHIP 10 (1005)
R2454	1-220-870-81	s	RES, CHIP 10 (1005)
R2455	1-220-870-81	s	RES, CHIP 10 (1005)
R2456	1-220-870-81	s	RES, CHIP 10 (1005)
R2457	1-220-870-81	s	RES, CHIP 10 (1005)
R2458	1-220-870-81	s	RES, CHIP 10 (1005)
R2459	1-220-870-81	s	RES, CHIP 10 (1005)
R2460	1-220-870-81	s	RES, CHIP 10 (1005)
R2501	1-208-855-81	s	RES, CHIP 47 (1005)
R2502	1-208-855-81	s	RES, CHIP 47 (1005)
R2503	1-208-855-81	s	RES, CHIP 47 (1005)
R2504	1-208-855-81	s	RES, CHIP 47 (1005)
R2505	1-208-855-81	s	RES, CHIP 47 (1005)
R2506	1-208-855-81	s	RES, CHIP 47 (1005)
R2507	1-208-855-81	s	RES, CHIP 47 (1005)
R2508	1-208-855-81	s	RES, CHIP 47 (1005)
R2509	1-208-875-81	s	RES, CHIP 330 (1005)
R2510	1-208-875-81	s	RES, CHIP 330 (1005)
R2511	1-208-875-81	s	RES, CHIP 330 (1005)
R2512	1-208-875-81	s	RES, CHIP 330 (1005)
R2513	1-208-875-81	s	RES, CHIP 330 (1005)
R2514	1-208-875-81	s	RES, CHIP 330 (1005)
R2515	1-208-875-81	s	RES, CHIP 330 (1005)
R2516	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2517	1-208-875-81	s	RES, CHIP 330 (1005)
R2518	1-208-875-81	s	RES, CHIP 330 (1005)
R2519	1-208-875-81	s	RES, CHIP 330 (1005)
R2520	1-208-875-81	s	RES, CHIP 330 (1005)
R2521	1-208-875-81	s	RES, CHIP 330 (1005)
R2522	1-208-875-81	s	RES, CHIP 330 (1005)
R2523	1-208-875-81	s	RES, CHIP 330 (1005)
R2524	1-208-875-81	s	RES, CHIP 330 (1005)
R2525	1-220-870-81	s	RES, CHIP 10 (1005)
R2526	1-220-870-81	s	RES, CHIP 10 (1005)
R2527	1-220-870-81	s	RES, CHIP 10 (1005)
R2528	1-220-870-81	s	RES, CHIP 10 (1005)
R2529	1-220-870-81	s	RES, CHIP 10 (1005)
R2530	1-220-870-81	s	RES, CHIP 10 (1005)
R2531	1-220-870-81	s	RES, CHIP 10 (1005)
R2532	1-220-870-81	s	RES, CHIP 10 (1005)
R2533	1-220-870-81	s	RES, CHIP 10 (1005)
R2534	1-220-870-81	s	RES, CHIP 10 (1005)
R2535	1-220-870-81	s	RES, CHIP 10 (1005)
R2536	1-220-870-81	s	RES, CHIP 10 (1005)
R2537	1-220-870-81	s	RES, CHIP 10 (1005)
R2538	1-220-870-81	s	RES, CHIP 10 (1005)
R2539	1-220-870-81	s	RES, CHIP 10 (1005)
R2540	1-220-870-81	s	RES, CHIP 10 (1005)
R3001	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3101	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3201	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3301	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4001	1-208-855-81	s	RES, CHIP 47 (1005)
R4002	1-208-855-81	s	RES, CHIP 47 (1005)
R4003	1-208-855-81	s	RES, CHIP 47 (1005)
R4004	1-208-855-81	s	RES, CHIP 47 (1005)
R4005	1-208-855-81	s	RES, CHIP 47 (1005)
R4006	1-208-855-81	s	RES, CHIP 47 (1005)
R4007	1-208-855-81	s	RES, CHIP 47 (1005)
R4008	1-208-855-81	s	RES, CHIP 47 (1005)
R4009	1-208-855-81	s	RES, CHIP 47 (1005)
R4010	1-208-855-81	s	RES, CHIP 47 (1005)
R4011	1-208-855-81	s	RES, CHIP 47 (1005)
R4012	1-208-855-81	s	RES, CHIP 47 (1005)
R4013	1-208-855-81	s	RES, CHIP 47 (1005)
R4014	1-208-855-81	s	RES, CHIP 47 (1005)
R4015	1-208-855-81	s	RES, CHIP 47 (1005)
R4016	1-208-855-81	s	RES, CHIP 47 (1005)
R4017	1-208-855-81	s	RES, CHIP 47 (1005)
R4018	1-208-855-81	s	RES, CHIP 47 (1005)
R4019	1-208-855-81	s	RES, CHIP 47 (1005)
R4020	1-208-855-81	s	RES, CHIP 47 (1005)
R4021	1-208-855-81	s	RES, CHIP 47 (1005)
R4022	1-208-855-81	s	RES, CHIP 47 (1005)
R4023	1-208-855-81	s	RES, CHIP 47 (1005)
R4024	1-208-855-81	s	RES, CHIP 47 (1005)
R4025	1-220-882-81	s	RES, CHIP 33 (1005)
R4026	1-220-882-81	s	RES, CHIP 33 (1005)
R4027	1-220-882-81	s	RES, CHIP 33 (1005)
R4028	1-220-882-81	s	RES, CHIP 33 (1005)
R4029	1-220-882-81	s	RES, CHIP 33 (1005)
R4030	1-220-882-81	s	RES, CHIP 33 (1005)
R4031	1-220-882-81	s	RES, CHIP 33 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4032	1-220-882-81	s	RES, CHIP 33 (1005)
R4033	1-220-882-81	s	RES, CHIP 33 (1005)
R4034	1-220-882-81	s	RES, CHIP 33 (1005)
R4035	1-220-882-81	s	RES, CHIP 33 (1005)
R4036	1-220-882-81	s	RES, CHIP 33 (1005)
R4037	1-208-875-81	s	RES, CHIP 330 (1005)
R4038	1-208-875-81	s	RES, CHIP 330 (1005)
R4039	1-208-875-81	s	RES, CHIP 330 (1005)
R4040	1-208-875-81	s	RES, CHIP 330 (1005)
R4041	1-208-875-81	s	RES, CHIP 330 (1005)
R4042	1-208-875-81	s	RES, CHIP 330 (1005)
R4043	1-208-875-81	s	RES, CHIP 330 (1005)
R4044	1-208-875-81	s	RES, CHIP 330 (1005)
R4045	1-208-875-81	s	RES, CHIP 330 (1005)
R4046	1-208-875-81	s	RES, CHIP 330 (1005)
R4047	1-208-875-81	s	RES, CHIP 330 (1005)
R4048	1-208-875-81	s	RES, CHIP 330 (1005)
R4049	1-208-855-81	s	RES, CHIP 47 (1005)
R4050	1-208-855-81	s	RES, CHIP 47 (1005)
R4051	1-208-855-81	s	RES, CHIP 47 (1005)
R4052	1-208-855-81	s	RES, CHIP 47 (1005)
R4053	1-208-855-81	s	RES, CHIP 47 (1005)
R4054	1-208-855-81	s	RES, CHIP 47 (1005)
R4055	1-208-855-81	s	RES, CHIP 47 (1005)
R4056	1-208-855-81	s	RES, CHIP 47 (1005)
R4057	1-208-855-81	s	RES, CHIP 47 (1005)
R4058	1-208-855-81	s	RES, CHIP 47 (1005)
R4059	1-208-855-81	s	RES, CHIP 47 (1005)
R4060	1-208-855-81	s	RES, CHIP 47 (1005)
R4061	1-208-855-81	s	RES, CHIP 47 (1005)
R4062	1-208-855-81	s	RES, CHIP 47 (1005)
R4063	1-208-855-81	s	RES, CHIP 47 (1005)
R4064	1-208-855-81	s	RES, CHIP 47 (1005)
R4065	1-208-855-81	s	RES, CHIP 47 (1005)
R4066	1-208-855-81	s	RES, CHIP 47 (1005)
R4067	1-208-855-81	s	RES, CHIP 47 (1005)
R4068	1-208-855-81	s	RES, CHIP 47 (1005)
R4069	1-208-855-81	s	RES, CHIP 47 (1005)
R4070	1-208-855-81	s	RES, CHIP 47 (1005)
R4071	1-208-855-81	s	RES, CHIP 47 (1005)
R4072	1-208-855-81	s	RES, CHIP 47 (1005)
R4073	1-220-882-81	s	RES, CHIP 33 (1005)
R4074	1-220-882-81	s	RES, CHIP 33 (1005)
R4075	1-220-882-81	s	RES, CHIP 33 (1005)
R4076	1-220-882-81	s	RES, CHIP 33 (1005)
R4077	1-220-882-81	s	RES, CHIP 33 (1005)
R4078	1-220-882-81	s	RES, CHIP 33 (1005)
R4079	1-220-882-81	s	RES, CHIP 33 (1005)
R4080	1-220-882-81	s	RES, CHIP 33 (1005)
R4081	1-220-882-81	s	RES, CHIP 33 (1005)
R4082	1-220-882-81	s	RES, CHIP 33 (1005)
R4083	1-220-882-81	s	RES, CHIP 33 (1005)
R4084	1-220-882-81	s	RES, CHIP 33 (1005)
R4085	1-208-875-81	s	RES, CHIP 330 (1005)
R4086	1-208-875-81	s	RES, CHIP 330 (1005)
R4087	1-208-875-81	s	RES, CHIP 330 (1005)
R4088	1-208-875-81	s	RES, CHIP 330 (1005)
R4089	1-208-875-81	s	RES, CHIP 330 (1005)
R4090	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4091	1-208-875-81	s	RES, CHIP 330 (1005)
R4092	1-208-875-81	s	RES, CHIP 330 (1005)
R4093	1-208-875-81	s	RES, CHIP 330 (1005)
R4094	1-208-875-81	s	RES, CHIP 330 (1005)
R4095	1-208-875-81	s	RES, CHIP 330 (1005)
R4096	1-208-875-81	s	RES, CHIP 330 (1005)
R4101	1-208-855-81	s	RES, CHIP 47 (1005)
R4102	1-208-855-81	s	RES, CHIP 47 (1005)
R4103	1-208-855-81	s	RES, CHIP 47 (1005)
R4104	1-208-855-81	s	RES, CHIP 47 (1005)
R4105	1-208-855-81	s	RES, CHIP 47 (1005)
R4106	1-208-855-81	s	RES, CHIP 47 (1005)
R4107	1-208-855-81	s	RES, CHIP 47 (1005)
R4108	1-208-855-81	s	RES, CHIP 47 (1005)
R4109	1-208-855-81	s	RES, CHIP 47 (1005)
R4110	1-208-855-81	s	RES, CHIP 47 (1005)
R4111	1-208-855-81	s	RES, CHIP 47 (1005)
R4112	1-208-855-81	s	RES, CHIP 47 (1005)
R4113	1-208-855-81	s	RES, CHIP 47 (1005)
R4114	1-208-855-81	s	RES, CHIP 47 (1005)
R4115	1-208-855-81	s	RES, CHIP 47 (1005)
R4116	1-208-855-81	s	RES, CHIP 47 (1005)
R4117	1-208-855-81	s	RES, CHIP 47 (1005)
R4118	1-208-855-81	s	RES, CHIP 47 (1005)
R4119	1-208-855-81	s	RES, CHIP 47 (1005)
R4120	1-208-855-81	s	RES, CHIP 47 (1005)
R4121	1-208-855-81	s	RES, CHIP 47 (1005)
R4122	1-208-855-81	s	RES, CHIP 47 (1005)
R4123	1-208-855-81	s	RES, CHIP 47 (1005)
R4124	1-208-855-81	s	RES, CHIP 47 (1005)
R4125	1-220-882-81	s	RES, CHIP 33 (1005)
R4126	1-220-882-81	s	RES, CHIP 33 (1005)
R4127	1-220-882-81	s	RES, CHIP 33 (1005)
R4128	1-220-882-81	s	RES, CHIP 33 (1005)
R4129	1-220-882-81	s	RES, CHIP 33 (1005)
R4130	1-220-882-81	s	RES, CHIP 33 (1005)
R4131	1-220-882-81	s	RES, CHIP 33 (1005)
R4132	1-220-882-81	s	RES, CHIP 33 (1005)
R4133	1-220-882-81	s	RES, CHIP 33 (1005)
R4134	1-220-882-81	s	RES, CHIP 33 (1005)
R4135	1-220-882-81	s	RES, CHIP 33 (1005)
R4136	1-220-882-81	s	RES, CHIP 33 (1005)
R4137	1-208-875-81	s	RES, CHIP 330 (1005)
R4138	1-208-875-81	s	RES, CHIP 330 (1005)
R4139	1-208-875-81	s	RES, CHIP 330 (1005)
R4140	1-208-875-81	s	RES, CHIP 330 (1005)
R4141	1-208-875-81	s	RES, CHIP 330 (1005)
R4142	1-208-875-81	s	RES, CHIP 330 (1005)
R4143	1-208-875-81	s	RES, CHIP 330 (1005)
R4144	1-208-875-81	s	RES, CHIP 330 (1005)
R4145	1-208-875-81	s	RES, CHIP 330 (1005)
R4146	1-208-875-81	s	RES, CHIP 330 (1005)
R4147	1-208-875-81	s	RES, CHIP 330 (1005)
R4148	1-208-875-81	s	RES, CHIP 330 (1005)
R4149	1-208-855-81	s	RES, CHIP 47 (1005)
R4150	1-208-855-81	s	RES, CHIP 47 (1005)
R4151	1-208-855-81	s	RES, CHIP 47 (1005)
R4152	1-208-855-81	s	RES, CHIP 47 (1005)
R4153	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4154	1-208-855-81	s	RES, CHIP 47 (1005)
R4155	1-208-855-81	s	RES, CHIP 47 (1005)
R4156	1-208-855-81	s	RES, CHIP 47 (1005)
R4157	1-208-855-81	s	RES, CHIP 47 (1005)
R4158	1-208-855-81	s	RES, CHIP 47 (1005)
R4159	1-208-855-81	s	RES, CHIP 47 (1005)
R4160	1-208-855-81	s	RES, CHIP 47 (1005)
R4161	1-208-855-81	s	RES, CHIP 47 (1005)
R4162	1-208-855-81	s	RES, CHIP 47 (1005)
R4163	1-208-855-81	s	RES, CHIP 47 (1005)
R4164	1-208-855-81	s	RES, CHIP 47 (1005)
R4165	1-208-855-81	s	RES, CHIP 47 (1005)
R4166	1-208-855-81	s	RES, CHIP 47 (1005)
R4167	1-208-855-81	s	RES, CHIP 47 (1005)
R4168	1-208-855-81	s	RES, CHIP 47 (1005)
R4169	1-208-855-81	s	RES, CHIP 47 (1005)
R4170	1-208-855-81	s	RES, CHIP 47 (1005)
R4171	1-208-855-81	s	RES, CHIP 47 (1005)
R4172	1-208-855-81	s	RES, CHIP 47 (1005)
R4173	1-220-882-81	s	RES, CHIP 33 (1005)
R4174	1-220-882-81	s	RES, CHIP 33 (1005)
R4175	1-220-882-81	s	RES, CHIP 33 (1005)
R4176	1-220-882-81	s	RES, CHIP 33 (1005)
R4177	1-220-882-81	s	RES, CHIP 33 (1005)
R4178	1-220-882-81	s	RES, CHIP 33 (1005)
R4179	1-220-882-81	s	RES, CHIP 33 (1005)
R4180	1-220-882-81	s	RES, CHIP 33 (1005)
R4181	1-220-882-81	s	RES, CHIP 33 (1005)
R4182	1-220-882-81	s	RES, CHIP 33 (1005)
R4183	1-220-882-81	s	RES, CHIP 33 (1005)
R4184	1-220-882-81	s	RES, CHIP 33 (1005)
R4185	1-208-875-81	s	RES, CHIP 330 (1005)
R4186	1-208-875-81	s	RES, CHIP 330 (1005)
R4187	1-208-875-81	s	RES, CHIP 330 (1005)
R4188	1-208-875-81	s	RES, CHIP 330 (1005)
R4189	1-208-875-81	s	RES, CHIP 330 (1005)
R4190	1-208-875-81	s	RES, CHIP 330 (1005)
R4191	1-208-875-81	s	RES, CHIP 330 (1005)
R4192	1-208-875-81	s	RES, CHIP 330 (1005)
R4193	1-208-875-81	s	RES, CHIP 330 (1005)
R4194	1-208-875-81	s	RES, CHIP 330 (1005)
R4195	1-208-875-81	s	RES, CHIP 330 (1005)
R4196	1-208-875-81	s	RES, CHIP 330 (1005)
R4201	1-208-855-81	s	RES, CHIP 47 (1005)
R4202	1-208-855-81	s	RES, CHIP 47 (1005)
R4203	1-208-855-81	s	RES, CHIP 47 (1005)
R4204	1-208-855-81	s	RES, CHIP 47 (1005)
R4205	1-208-855-81	s	RES, CHIP 47 (1005)
R4206	1-208-855-81	s	RES, CHIP 47 (1005)
R4207	1-208-855-81	s	RES, CHIP 47 (1005)
R4208	1-208-855-81	s	RES, CHIP 47 (1005)
R4209	1-208-855-81	s	RES, CHIP 47 (1005)
R4210	1-208-855-81	s	RES, CHIP 47 (1005)
R4211	1-208-855-81	s	RES, CHIP 47 (1005)
R4212	1-208-855-81	s	RES, CHIP 47 (1005)
R4213	1-208-855-81	s	RES, CHIP 47 (1005)
R4214	1-208-855-81	s	RES, CHIP 47 (1005)
R4215	1-208-855-81	s	RES, CHIP 47 (1005)
R4216	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4217	1-208-855-81	s	RES, CHIP 47 (1005)
R4218	1-208-855-81	s	RES, CHIP 47 (1005)
R4219	1-208-855-81	s	RES, CHIP 47 (1005)
R4220	1-208-855-81	s	RES, CHIP 47 (1005)
R4221	1-208-855-81	s	RES, CHIP 47 (1005)
R4222	1-208-855-81	s	RES, CHIP 47 (1005)
R4223	1-208-855-81	s	RES, CHIP 47 (1005)
R4224	1-208-855-81	s	RES, CHIP 47 (1005)
R4225	1-220-882-81	s	RES, CHIP 33 (1005)
R4226	1-220-882-81	s	RES, CHIP 33 (1005)
R4227	1-220-882-81	s	RES, CHIP 33 (1005)
R4228	1-220-882-81	s	RES, CHIP 33 (1005)
R4229	1-220-882-81	s	RES, CHIP 33 (1005)
R4230	1-220-882-81	s	RES, CHIP 33 (1005)
R4231	1-220-882-81	s	RES, CHIP 33 (1005)
R4232	1-220-882-81	s	RES, CHIP 33 (1005)
R4233	1-220-882-81	s	RES, CHIP 33 (1005)
R4234	1-220-882-81	s	RES, CHIP 33 (1005)
R4235	1-220-882-81	s	RES, CHIP 33 (1005)
R4236	1-220-882-81	s	RES, CHIP 33 (1005)
R4237	1-208-875-81	s	RES, CHIP 330 (1005)
R4238	1-208-875-81	s	RES, CHIP 330 (1005)
R4239	1-208-875-81	s	RES, CHIP 330 (1005)
R4240	1-208-875-81	s	RES, CHIP 330 (1005)
R4241	1-208-875-81	s	RES, CHIP 330 (1005)
R4242	1-208-875-81	s	RES, CHIP 330 (1005)
R4243	1-208-875-81	s	RES, CHIP 330 (1005)
R4244	1-208-875-81	s	RES, CHIP 330 (1005)
R4245	1-208-875-81	s	RES, CHIP 330 (1005)
R4246	1-208-875-81	s	RES, CHIP 330 (1005)
R4247	1-208-875-81	s	RES, CHIP 330 (1005)
R4248	1-208-875-81	s	RES, CHIP 330 (1005)
R4249	1-208-855-81	s	RES, CHIP 47 (1005)
R4250	1-208-855-81	s	RES, CHIP 47 (1005)
R4251	1-208-855-81	s	RES, CHIP 47 (1005)
R4252	1-208-855-81	s	RES, CHIP 47 (1005)
R4253	1-208-855-81	s	RES, CHIP 47 (1005)
R4254	1-208-855-81	s	RES, CHIP 47 (1005)
R4255	1-208-855-81	s	RES, CHIP 47 (1005)
R4256	1-208-855-81	s	RES, CHIP 47 (1005)
R4257	1-208-855-81	s	RES, CHIP 47 (1005)
R4258	1-208-855-81	s	RES, CHIP 47 (1005)
R4259	1-208-855-81	s	RES, CHIP 47 (1005)
R4260	1-208-855-81	s	RES, CHIP 47 (1005)
R4261	1-208-855-81	s	RES, CHIP 47 (1005)
R4262	1-208-855-81	s	RES, CHIP 47 (1005)
R4263	1-208-855-81	s	RES, CHIP 47 (1005)
R4264	1-208-855-81	s	RES, CHIP 47 (1005)
R4265	1-220-882-81	s	RES, CHIP 33 (1005)
R4266	1-220-882-81	s	RES, CHIP 33 (1005)
R4267	1-220-882-81	s	RES, CHIP 33 (1005)
R4268	1-220-882-81	s	RES, CHIP 33 (1005)
R4269	1-220-882-81	s	RES, CHIP 33 (1005)
R4270	1-220-882-81	s	RES, CHIP 33 (1005)
R4271	1-220-882-81	s	RES, CHIP 33 (1005)
R4272	1-220-882-81	s	RES, CHIP 33 (1005)
R4273	1-208-875-81	s	RES, CHIP 330 (1005)
R4274	1-208-875-81	s	RES, CHIP 330 (1005)
R4275	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4276	1-208-875-81	s	RES, CHIP 330 (1005)
R4277	1-208-875-81	s	RES, CHIP 330 (1005)
R4278	1-208-875-81	s	RES, CHIP 330 (1005)
R4279	1-208-875-81	s	RES, CHIP 330 (1005)
R4280	1-208-875-81	s	RES, CHIP 330 (1005)
R5001	1-208-855-81	s	RES, CHIP 47 (1005)
R5002	1-208-855-81	s	RES, CHIP 47 (1005)
R5003	1-208-855-81	s	RES, CHIP 47 (1005)
R5004	1-208-855-81	s	RES, CHIP 47 (1005)
R5005	1-208-855-81	s	RES, CHIP 47 (1005)
R5006	1-208-855-81	s	RES, CHIP 47 (1005)
R5007	1-208-855-81	s	RES, CHIP 47 (1005)
R5008	1-208-855-81	s	RES, CHIP 47 (1005)
R5009	1-208-855-81	s	RES, CHIP 47 (1005)
R5010	1-208-855-81	s	RES, CHIP 47 (1005)
R5011	1-208-855-81	s	RES, CHIP 47 (1005)
R5012	1-208-855-81	s	RES, CHIP 47 (1005)
R5013	1-208-855-81	s	RES, CHIP 47 (1005)
R5014	1-208-855-81	s	RES, CHIP 47 (1005)
R5015	1-208-855-81	s	RES, CHIP 47 (1005)
R5016	1-208-855-81	s	RES, CHIP 47 (1005)
R5017	1-208-855-81	s	RES, CHIP 47 (1005)
R5018	1-208-855-81	s	RES, CHIP 47 (1005)
R5019	1-208-855-81	s	RES, CHIP 47 (1005)
R5020	1-208-855-81	s	RES, CHIP 47 (1005)
R5021	1-208-855-81	s	RES, CHIP 47 (1005)
R5022	1-208-855-81	s	RES, CHIP 47 (1005)
R5023	1-208-855-81	s	RES, CHIP 47 (1005)
R5024	1-208-855-81	s	RES, CHIP 47 (1005)
R5025	1-220-882-81	s	RES, CHIP 33 (1005)
R5026	1-220-882-81	s	RES, CHIP 33 (1005)
R5027	1-220-882-81	s	RES, CHIP 33 (1005)
R5028	1-220-882-81	s	RES, CHIP 33 (1005)
R5029	1-220-882-81	s	RES, CHIP 33 (1005)
R5030	1-220-882-81	s	RES, CHIP 33 (1005)
R5031	1-220-882-81	s	RES, CHIP 33 (1005)
R5032	1-220-882-81	s	RES, CHIP 33 (1005)
R5033	1-220-882-81	s	RES, CHIP 33 (1005)
R5034	1-220-882-81	s	RES, CHIP 33 (1005)
R5035	1-220-882-81	s	RES, CHIP 33 (1005)
R5036	1-220-882-81	s	RES, CHIP 33 (1005)
R5037	1-208-875-81	s	RES, CHIP 330 (1005)
R5038	1-208-875-81	s	RES, CHIP 330 (1005)
R5039	1-208-875-81	s	RES, CHIP 330 (1005)
R5040	1-208-875-81	s	RES, CHIP 330 (1005)
R5041	1-208-875-81	s	RES, CHIP 330 (1005)
R5042	1-208-875-81	s	RES, CHIP 330 (1005)
R5043	1-208-875-81	s	RES, CHIP 330 (1005)
R5044	1-208-875-81	s	RES, CHIP 330 (1005)
R5045	1-208-875-81	s	RES, CHIP 330 (1005)
R5046	1-208-875-81	s	RES, CHIP 330 (1005)
R5047	1-208-875-81	s	RES, CHIP 330 (1005)
R5048	1-208-875-81	s	RES, CHIP 330 (1005)
R5049	1-208-855-81	s	RES, CHIP 47 (1005)
R5050	1-208-855-81	s	RES, CHIP 47 (1005)
R5051	1-208-855-81	s	RES, CHIP 47 (1005)
R5052	1-208-855-81	s	RES, CHIP 47 (1005)
R5053	1-208-855-81	s	RES, CHIP 47 (1005)
R5054	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5055	1-208-855-81	s	RES, CHIP 47 (1005)
R5056	1-208-855-81	s	RES, CHIP 47 (1005)
R5057	1-208-855-81	s	RES, CHIP 47 (1005)
R5058	1-208-855-81	s	RES, CHIP 47 (1005)
R5059	1-208-855-81	s	RES, CHIP 47 (1005)
R5060	1-208-855-81	s	RES, CHIP 47 (1005)
R5061	1-208-855-81	s	RES, CHIP 47 (1005)
R5062	1-208-855-81	s	RES, CHIP 47 (1005)
R5063	1-208-855-81	s	RES, CHIP 47 (1005)
R5064	1-208-855-81	s	RES, CHIP 47 (1005)
R5065	1-208-855-81	s	RES, CHIP 47 (1005)
R5066	1-208-855-81	s	RES, CHIP 47 (1005)
R5067	1-208-855-81	s	RES, CHIP 47 (1005)
R5068	1-208-855-81	s	RES, CHIP 47 (1005)
R5069	1-208-855-81	s	RES, CHIP 47 (1005)
R5070	1-208-855-81	s	RES, CHIP 47 (1005)
R5071	1-208-855-81	s	RES, CHIP 47 (1005)
R5072	1-208-855-81	s	RES, CHIP 47 (1005)
R5073	1-220-882-81	s	RES, CHIP 33 (1005)
R5074	1-220-882-81	s	RES, CHIP 33 (1005)
R5075	1-220-882-81	s	RES, CHIP 33 (1005)
R5076	1-220-882-81	s	RES, CHIP 33 (1005)
R5077	1-220-882-81	s	RES, CHIP 33 (1005)
R5078	1-220-882-81	s	RES, CHIP 33 (1005)
R5079	1-220-882-81	s	RES, CHIP 33 (1005)
R5080	1-220-882-81	s	RES, CHIP 33 (1005)
R5081	1-220-882-81	s	RES, CHIP 33 (1005)
R5082	1-220-882-81	s	RES, CHIP 33 (1005)
R5083	1-220-882-81	s	RES, CHIP 33 (1005)
R5084	1-220-882-81	s	RES, CHIP 33 (1005)
R5085	1-208-875-81	s	RES, CHIP 330 (1005)
R5086	1-208-875-81	s	RES, CHIP 330 (1005)
R5087	1-208-875-81	s	RES, CHIP 330 (1005)
R5088	1-208-875-81	s	RES, CHIP 330 (1005)
R5089	1-208-875-81	s	RES, CHIP 330 (1005)
R5090	1-208-875-81	s	RES, CHIP 330 (1005)
R5091	1-208-875-81	s	RES, CHIP 330 (1005)
R5092	1-208-875-81	s	RES, CHIP 330 (1005)
R5093	1-208-875-81	s	RES, CHIP 330 (1005)
R5094	1-208-875-81	s	RES, CHIP 330 (1005)
R5095	1-208-875-81	s	RES, CHIP 330 (1005)
R5096	1-208-875-81	s	RES, CHIP 330 (1005)
R5101	1-208-855-81	s	RES, CHIP 47 (1005)
R5102	1-208-855-81	s	RES, CHIP 47 (1005)
R5103	1-208-855-81	s	RES, CHIP 47 (1005)
R5104	1-208-855-81	s	RES, CHIP 47 (1005)
R5105	1-208-855-81	s	RES, CHIP 47 (1005)
R5106	1-208-855-81	s	RES, CHIP 47 (1005)
R5107	1-208-855-81	s	RES, CHIP 47 (1005)
R5108	1-208-855-81	s	RES, CHIP 47 (1005)
R5109	1-208-855-81	s	RES, CHIP 47 (1005)
R5110	1-208-855-81	s	RES, CHIP 47 (1005)
R5111	1-208-855-81	s	RES, CHIP 47 (1005)
R5112	1-208-855-81	s	RES, CHIP 47 (1005)
R5113	1-208-855-81	s	RES, CHIP 47 (1005)
R5114	1-208-855-81	s	RES, CHIP 47 (1005)
R5115	1-208-855-81	s	RES, CHIP 47 (1005)
R5116	1-208-855-81	s	RES, CHIP 47 (1005)
R5117	1-208-855-81	s	RES, CHIP 47 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5118	1-208-855-81	s	RES, CHIP 47 (1005)
R5119	1-208-855-81	s	RES, CHIP 47 (1005)
R5120	1-208-855-81	s	RES, CHIP 47 (1005)
R5121	1-208-855-81	s	RES, CHIP 47 (1005)
R5122	1-208-855-81	s	RES, CHIP 47 (1005)
R5123	1-208-855-81	s	RES, CHIP 47 (1005)
R5124	1-208-855-81	s	RES, CHIP 47 (1005)
R5125	1-220-882-81	s	RES, CHIP 33 (1005)
R5126	1-220-882-81	s	RES, CHIP 33 (1005)
R5127	1-220-882-81	s	RES, CHIP 33 (1005)
R5128	1-220-882-81	s	RES, CHIP 33 (1005)
R5129	1-220-882-81	s	RES, CHIP 33 (1005)
R5130	1-220-882-81	s	RES, CHIP 33 (1005)
R5131	1-220-882-81	s	RES, CHIP 33 (1005)
R5132	1-220-882-81	s	RES, CHIP 33 (1005)
R5133	1-220-882-81	s	RES, CHIP 33 (1005)
R5134	1-220-882-81	s	RES, CHIP 33 (1005)
R5135	1-220-882-81	s	RES, CHIP 33 (1005)
R5136	1-220-882-81	s	RES, CHIP 33 (1005)
R5137	1-208-875-81	s	RES, CHIP 330 (1005)
R5138	1-208-875-81	s	RES, CHIP 330 (1005)
R5139	1-208-875-81	s	RES, CHIP 330 (1005)
R5140	1-208-875-81	s	RES, CHIP 330 (1005)
R5141	1-208-875-81	s	RES, CHIP 330 (1005)
R5142	1-208-875-81	s	RES, CHIP 330 (1005)
R5143	1-208-875-81	s	RES, CHIP 330 (1005)
R5144	1-208-875-81	s	RES, CHIP 330 (1005)
R5145	1-208-875-81	s	RES, CHIP 330 (1005)
R5146	1-208-875-81	s	RES, CHIP 330 (1005)
R5147	1-208-875-81	s	RES, CHIP 330 (1005)
R5148	1-208-875-81	s	RES, CHIP 330 (1005)
R5149	1-208-855-81	s	RES, CHIP 47 (1005)
R5150	1-208-855-81	s	RES, CHIP 47 (1005)
R5151	1-208-855-81	s	RES, CHIP 47 (1005)
R5152	1-208-855-81	s	RES, CHIP 47 (1005)
R5153	1-208-855-81	s	RES, CHIP 47 (1005)
R5154	1-208-855-81	s	RES, CHIP 47 (1005)
R5155	1-208-855-81	s	RES, CHIP 47 (1005)
R5156	1-208-855-81	s	RES, CHIP 47 (1005)
R5157	1-208-855-81	s	RES, CHIP 47 (1005)
R5158	1-208-855-81	s	RES, CHIP 47 (1005)
R5159	1-208-855-81	s	RES, CHIP 47 (1005)
R5160	1-208-855-81	s	RES, CHIP 47 (1005)
R5161	1-208-855-81	s	RES, CHIP 47 (1005)
R5162	1-208-855-81	s	RES, CHIP 47 (1005)
R5163	1-208-855-81	s	RES, CHIP 47 (1005)
R5164	1-208-855-81	s	RES, CHIP 47 (1005)
R5165	1-208-855-81	s	RES, CHIP 47 (1005)
R5166	1-208-855-81	s	RES, CHIP 47 (1005)
R5167	1-208-855-81	s	RES, CHIP 47 (1005)
R5168	1-208-855-81	s	RES, CHIP 47 (1005)
R5169	1-208-855-81	s	RES, CHIP 47 (1005)
R5170	1-208-855-81	s	RES, CHIP 47 (1005)
R5171	1-208-855-81	s	RES, CHIP 47 (1005)
R5172	1-208-855-81	s	RES, CHIP 47 (1005)
R5173	1-220-882-81	s	RES, CHIP 33 (1005)
R5174	1-220-882-81	s	RES, CHIP 33 (1005)
R5175	1-220-882-81	s	RES, CHIP 33 (1005)
R5176	1-220-882-81	s	RES, CHIP 33 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5177	1-220-882-81	s	RES, CHIP 33 (1005)
R5178	1-220-882-81	s	RES, CHIP 33 (1005)
R5179	1-220-882-81	s	RES, CHIP 33 (1005)
R5180	1-220-882-81	s	RES, CHIP 33 (1005)
R5181	1-220-882-81	s	RES, CHIP 33 (1005)
R5182	1-220-882-81	s	RES, CHIP 33 (1005)
R5183	1-220-882-81	s	RES, CHIP 33 (1005)
R5184	1-220-882-81	s	RES, CHIP 33 (1005)
R5185	1-208-875-81	s	RES, CHIP 330 (1005)
R5186	1-208-875-81	s	RES, CHIP 330 (1005)
R5187	1-208-875-81	s	RES, CHIP 330 (1005)
R5188	1-208-875-81	s	RES, CHIP 330 (1005)
R5189	1-208-875-81	s	RES, CHIP 330 (1005)
R5190	1-208-875-81	s	RES, CHIP 330 (1005)
R5191	1-208-875-81	s	RES, CHIP 330 (1005)
R5192	1-208-875-81	s	RES, CHIP 330 (1005)
R5193	1-208-875-81	s	RES, CHIP 330 (1005)
R5194	1-208-875-81	s	RES, CHIP 330 (1005)
R5195	1-208-875-81	s	RES, CHIP 330 (1005)
R5196	1-208-875-81	s	RES, CHIP 330 (1005)
R5201	1-208-855-81	s	RES, CHIP 47 (1005)
R5202	1-208-855-81	s	RES, CHIP 47 (1005)
R5203	1-208-855-81	s	RES, CHIP 47 (1005)
R5204	1-208-855-81	s	RES, CHIP 47 (1005)
R5205	1-208-855-81	s	RES, CHIP 47 (1005)
R5206	1-208-855-81	s	RES, CHIP 47 (1005)
R5207	1-208-855-81	s	RES, CHIP 47 (1005)
R5208	1-208-855-81	s	RES, CHIP 47 (1005)
R5209	1-208-855-81	s	RES, CHIP 47 (1005)
R5210	1-208-855-81	s	RES, CHIP 47 (1005)
R5211	1-208-855-81	s	RES, CHIP 47 (1005)
R5212	1-208-855-81	s	RES, CHIP 47 (1005)
R5213	1-208-855-81	s	RES, CHIP 47 (1005)
R5214	1-208-855-81	s	RES, CHIP 47 (1005)
R5215	1-208-855-81	s	RES, CHIP 47 (1005)
R5216	1-208-855-81	s	RES, CHIP 47 (1005)
R5217	1-208-855-81	s	RES, CHIP 47 (1005)
R5218	1-208-855-81	s	RES, CHIP 47 (1005)
R5219	1-208-855-81	s	RES, CHIP 47 (1005)
R5220	1-208-855-81	s	RES, CHIP 47 (1005)
R5221	1-208-855-81	s	RES, CHIP 47 (1005)
R5222	1-208-855-81	s	RES, CHIP 47 (1005)
R5223	1-208-855-81	s	RES, CHIP 47 (1005)
R5224	1-208-855-81	s	RES, CHIP 47 (1005)
R5225	1-220-882-81	s	RES, CHIP 33 (1005)
R5226	1-220-882-81	s	RES, CHIP 33 (1005)
R5227	1-220-882-81	s	RES, CHIP 33 (1005)
R5228	1-220-882-81	s	RES, CHIP 33 (1005)
R5229	1-220-882-81	s	RES, CHIP 33 (1005)
R5230	1-220-882-81	s	RES, CHIP 33 (1005)
R5231	1-220-882-81	s	RES, CHIP 33 (1005)
R5232	1-220-882-81	s	RES, CHIP 33 (1005)
R5233	1-220-882-81	s	RES, CHIP 33 (1005)
R5234	1-220-882-81	s	RES, CHIP 33 (1005)
R5235	1-220-882-81	s	RES, CHIP 33 (1005)
R5236	1-220-882-81	s	RES, CHIP 33 (1005)
R5237	1-208-875-81	s	RES, CHIP 330 (1005)
R5238	1-208-875-81	s	RES, CHIP 330 (1005)
R5239	1-208-875-81	s	RES, CHIP 330 (1005)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5240	1-208-875-81	s	RES, CHIP 330 (1005)
R5241	1-208-875-81	s	RES, CHIP 330 (1005)
R5242	1-208-875-81	s	RES, CHIP 330 (1005)
R5243	1-208-875-81	s	RES, CHIP 330 (1005)
R5244	1-208-875-81	s	RES, CHIP 330 (1005)
R5245	1-208-875-81	s	RES, CHIP 330 (1005)
R5246	1-208-875-81	s	RES, CHIP 330 (1005)
R5247	1-208-875-81	s	RES, CHIP 330 (1005)
R5248	1-208-875-81	s	RES, CHIP 330 (1005)
R5249	1-208-855-81	s	RES, CHIP 47 (1005)
R5250	1-208-855-81	s	RES, CHIP 47 (1005)
R5251	1-208-855-81	s	RES, CHIP 47 (1005)
R5252	1-208-855-81	s	RES, CHIP 47 (1005)
R5253	1-208-855-81	s	RES, CHIP 47 (1005)
R5254	1-208-855-81	s	RES, CHIP 47 (1005)
R5255	1-208-855-81	s	RES, CHIP 47 (1005)
R5256	1-208-855-81	s	RES, CHIP 47 (1005)
R5257	1-208-855-81	s	RES, CHIP 47 (1005)
R5258	1-208-855-81	s	RES, CHIP 47 (1005)
R5259	1-208-855-81	s	RES, CHIP 47 (1005)
R5260	1-208-855-81	s	RES, CHIP 47 (1005)
R5261	1-208-855-81	s	RES, CHIP 47 (1005)
R5262	1-208-855-81	s	RES, CHIP 47 (1005)
R5263	1-208-855-81	s	RES, CHIP 47 (1005)
R5264	1-208-855-81	s	RES, CHIP 47 (1005)
R5265	1-220-882-81	s	RES, CHIP 33 (1005)
R5266	1-220-882-81	s	RES, CHIP 33 (1005)
R5267	1-220-882-81	s	RES, CHIP 33 (1005)
R5268	1-220-882-81	s	RES, CHIP 33 (1005)
R5269	1-220-882-81	s	RES, CHIP 33 (1005)
R5270	1-220-882-81	s	RES, CHIP 33 (1005)
R5271	1-220-882-81	s	RES, CHIP 33 (1005)
R5272	1-220-882-81	s	RES, CHIP 33 (1005)
R5273	1-208-875-81	s	RES, CHIP 330 (1005)
R5274	1-208-875-81	s	RES, CHIP 330 (1005)
R5275	1-208-875-81	s	RES, CHIP 330 (1005)
R5276	1-208-875-81	s	RES, CHIP 330 (1005)
R5277	1-208-875-81	s	RES, CHIP 330 (1005)
R5278	1-208-875-81	s	RES, CHIP 330 (1005)
R5279	1-208-875-81	s	RES, CHIP 330 (1005)
R5280	1-208-875-81	s	RES, CHIP 330 (1005)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB301	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB302	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB303	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB304	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB305	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB306	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB307	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB308	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB309	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB310	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB311	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB312	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB313	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB314	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(XPT-29 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB315	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB316	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB317	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB318	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB319	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB320	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB321	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB322	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB323	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB324	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB325	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB326	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB327	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB328	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB329	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB330	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB331	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB332	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB333	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB334	1-234-370-21	s	RES, NETWORK 22 (1005X4)
TP1	1-535-877-22	s	CHIP, CHECKER
TP2	1-535-877-22	s	CHIP, CHECKER
TP3	1-535-877-22	s	CHIP, CHECKER
TP4	1-535-877-22	s	CHIP, CHECKER
TP5	1-535-877-22	s	CHIP, CHECKER

2-4. Supplied Accessories List


SUPPLIED ACCESSORIES


Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-695-542-21	s	TERMINATOR 75
2pcs	3-624-821-01	s	+PSW 3X6 (CU,NI)
1pc	3-636-844-02	o	PLATE(2), BLIND
4pcs	7-682-546-03	s	SCREW +B 3X5

Section 3
Block Diagrams


Index

Board Name	Function	Page
Overall	–	3-2
CA-54C	CPU Board	3-3
CA-54CFE	CPU Board	3-4
CNI-32	17-Input Board	3-5
CNI-35	15-Input Board	3-5
CNO-24	Monitor Output Board	3-6
CNO-35	Output Board	3-6
CNO-36	Output Board	3-7
DIF-184	Compact Flash Interface Board	3-7
DVP-49	DME Board	3-8
FC-109	Format Converter Board	3-10
MIX-52	Mix/Effect Board	3-11
MY-114	Frame Memory Board	3-12
OUT-33	Output Board	3-13
SG-272	Signal Generator Board	3-14
SIO-26	Serial Interface Board	3-14
XPT-29	Cross Point Board	3-15

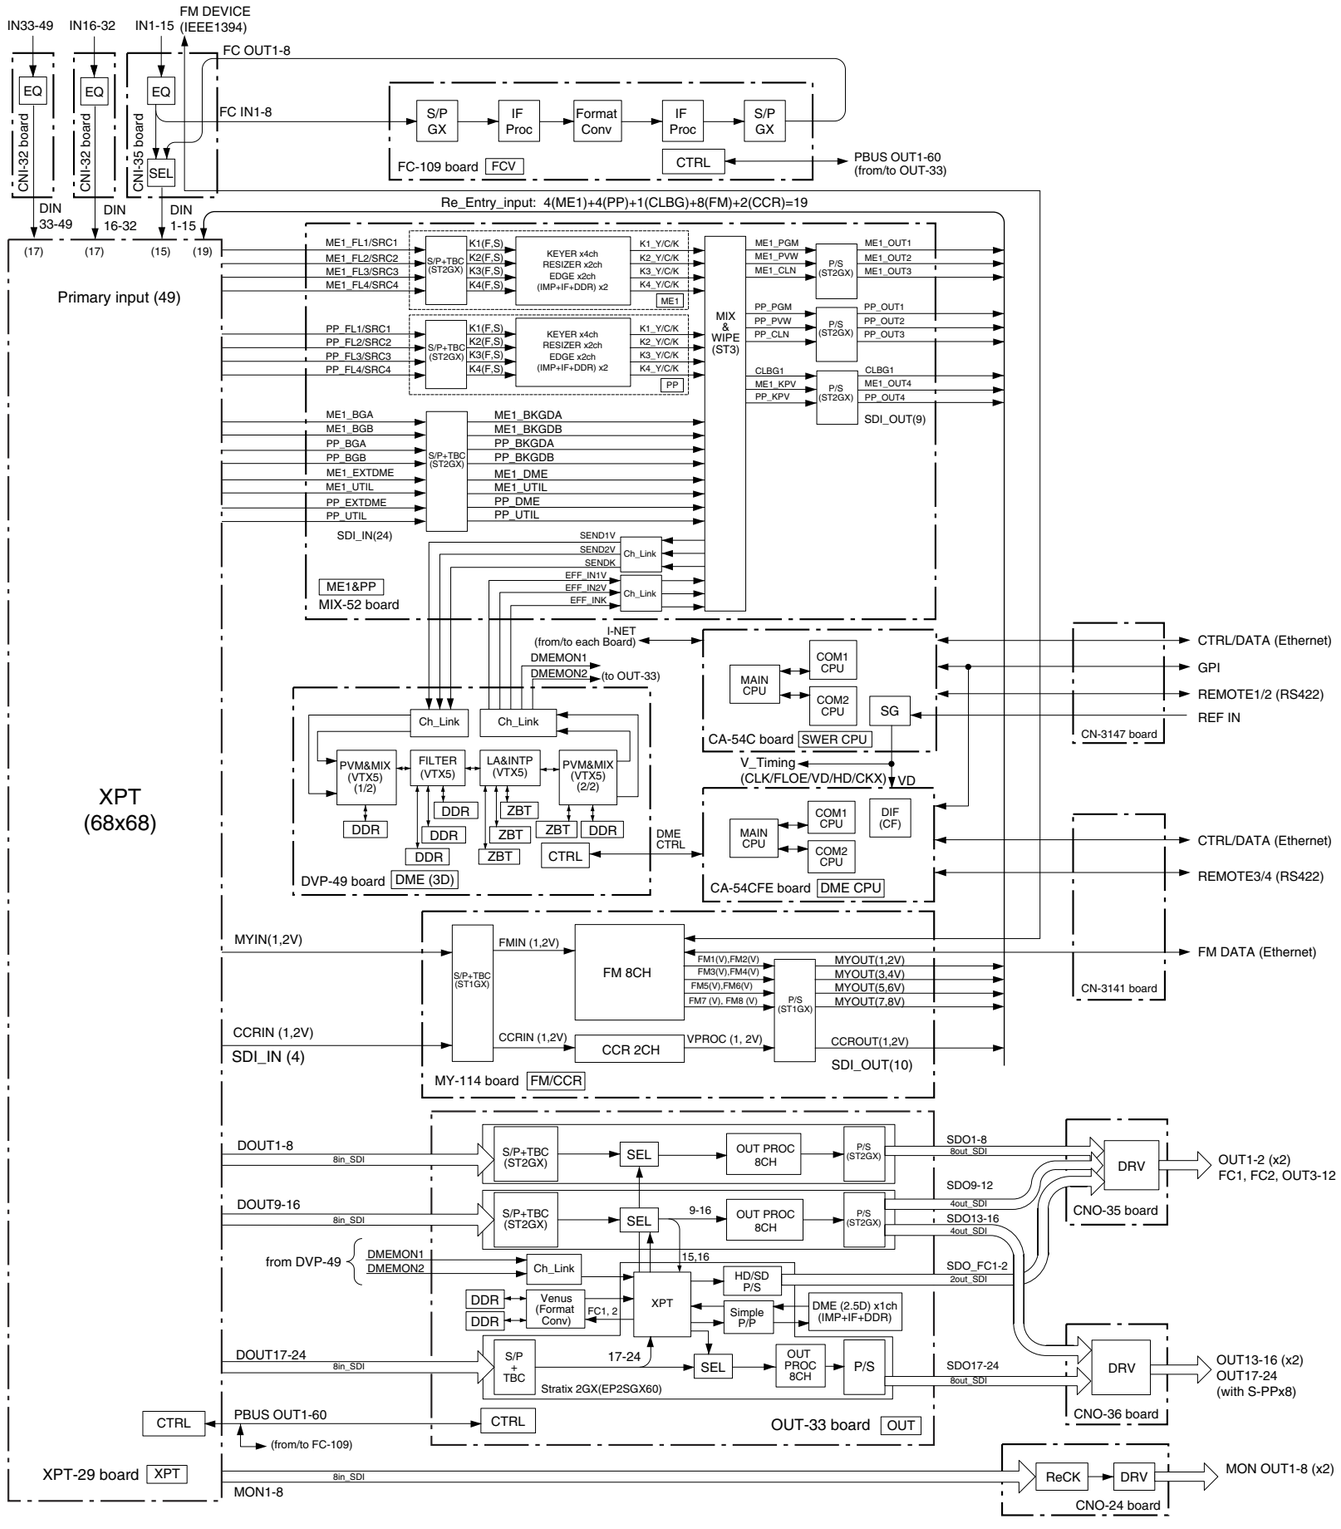
IN33-49
IN16-32
IN1-15
FM DEVICE (IEEE1394)
FC OUT1-8
FC IN1-8
EQ
CNI-32 board
CNI-35 board
SEL
S/P GX
IF Proc
Format Conv
FC-109 board FCV
CTRL
PBUS OUT1-60 (from/to OUT-33)
DIN 33-49
DIN 16-32
DIN 1-15
Re_Entry_input: 4(ME1)+4(PP)+1(CLBG)+8(FM)+2(CCR)=19
(17) (17) (15) (19)
Primary input (49)
ME1_FL1/SRC1
ME1_FL2/SRC2
ME1_FL3/SRC3
ME1_FL4/SRC4
S/P+TBC (ST2GX)
K1(F,S)
K2(F,S)
K3(F,S)
K4(F,S)
KEYER x4ch
RESIZER x2ch
EDGE x2ch
(IMP+IF+DDR) x2
K1_Y/C/K
K2_Y/C/K
K3_Y/C/K
K4_Y/C/K
ME1
PP_FL1/SRC1
PP_FL2/SRC2
PP_FL3/SRC3
PP_FL4/SRC4
PP
MIX & WIPE (ST3)
ME1_PGM
ME1_PVW
ME1_CLN
P/S (ST2GX)
ME1_OUT1
ME1_OUT2
ME1_OUT3
PP_PGM
PP_PVW
PP_CLN
PP_OUT1
PP_OUT2
PP_OUT3
CLBG1
ME1_KPV
PP_KPV
ME1_OUT4
PP_OUT4
SDI_OUT(9)
ME1_BGA
ME1_BGB
PP_BGA
PP_BGB
ME1_EXTDME
ME1_UTIL
PP_EXTDME
PP_UTIL
ME1_BKGDA
ME1_BKGDB
PP_BKGDA
PP_BKGDB
ME1_DME
ME1_UTIL
PP_DME
PP_UTIL
SDI_IN(24)
SEND1V
SEND2V
SENDK
EFF_IN1V
EFF_IN2V
EFF_INK
Ch_Link
ME1&PP
MIX-52 board
I-NET (from/to each Board)
DMEMON1
DMEMON2
(to OUT-33)
MAIN CPU
COM1 CPU
COM2 CPU
SG
CA-54C board SWER CPU
CTRL/DATA (Ethernet)
GPI
REMOTE1/2 (RS422)
REF IN
CN-3147 board
V_Timing (CLK/FLOE/VD/HD/CKX)
VD
PVM&MIX (VTX5) (1/2)
FILTER (VTX5)
LA&INTP (VTX5)
PVM&MIX (VTX5) (2/2)
DDR
ZBT
CTRL
DME CTRL
DVP-49 board DME (3D)
DIF (CF)
CA-54CFE board DME CPU
CTRL/DATA (Ethernet)
REMOTE3/4 (RS422)
XPT (68x68)
MYIN(1,2V)
FMIN (1,2V)
FM 8CH
FM1(V),FM2(V)
FM3(V),FM4(V)
FM5(V),FM6(V)
FM7 (V), FM8 (V)
MYOUT(1,2V)
MYOUT(3,4V)
MYOUT(5,6V)
MYOUT(7,8V)
FM DATA (Ethernet)
CN-3141 board
CCRIN (1,2V)
SDI_IN (4)
CCR 2CH
VPROC (1, 2V)
CCROUT(1,2V)
SDI_OUT(10)
MY-114 board FM/CCR
DOUT1-8
8in_SDI
DOUT9-16
DOUT17-24
from DVP-49
OUT PROC 8CH
9-16
15,16
17-24
HD/SD P/S
Simple P/P
DME (2.5D) x1ch (IMP+IF+DDR)
Venus (Format Conv)
FC1, 2
XPT
Stratix 2GX(EP2SGX60)
SDO1-8
8out_SDI
SDO9-12
4out_SDI
SDO13-16
4out_SDI
SDO_FC1-2
2out_SDI
SDO17-24
DRV
OUT1-2 (x2)
FC1, FC2, OUT3-12
CNO-35 board
OUT13-16 (x2)
OUT17-24
(with S-PPx8)
CNO-36 board
CTRL
PBUS OUT1-60
(from/to FC-109)
OUT-33 board OUT
XPT-29 board XPT
MON1-8
ReCK
MON OUT1-8 (x2)
CNO-24 board

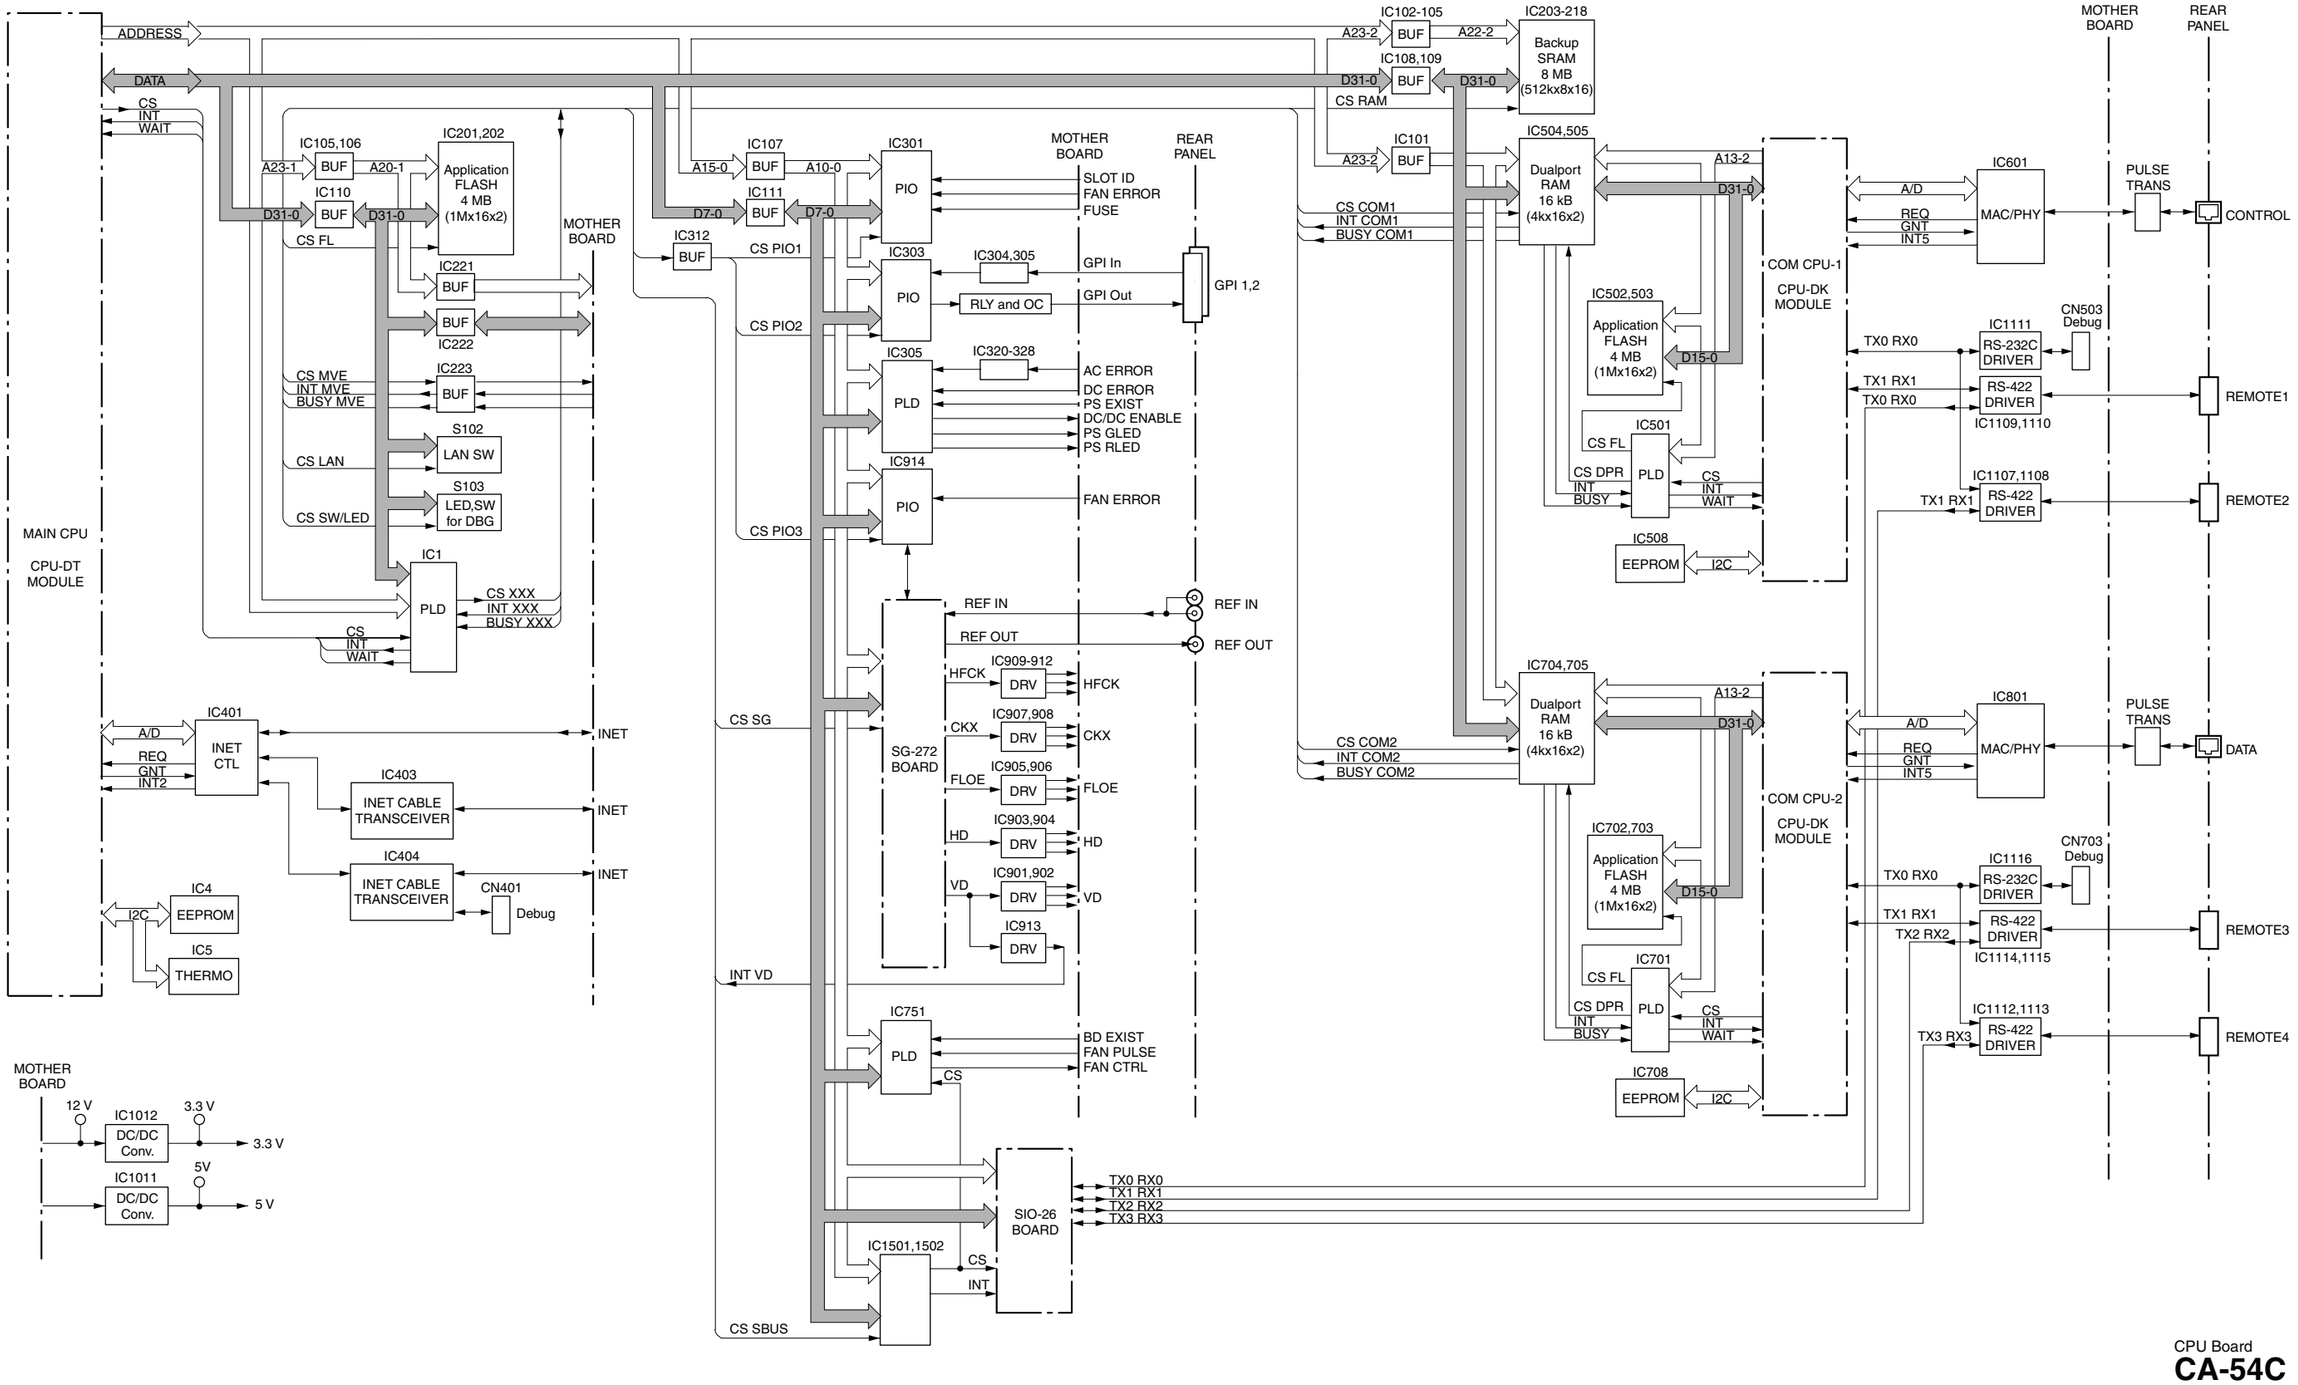


CPU Board
CA-54C

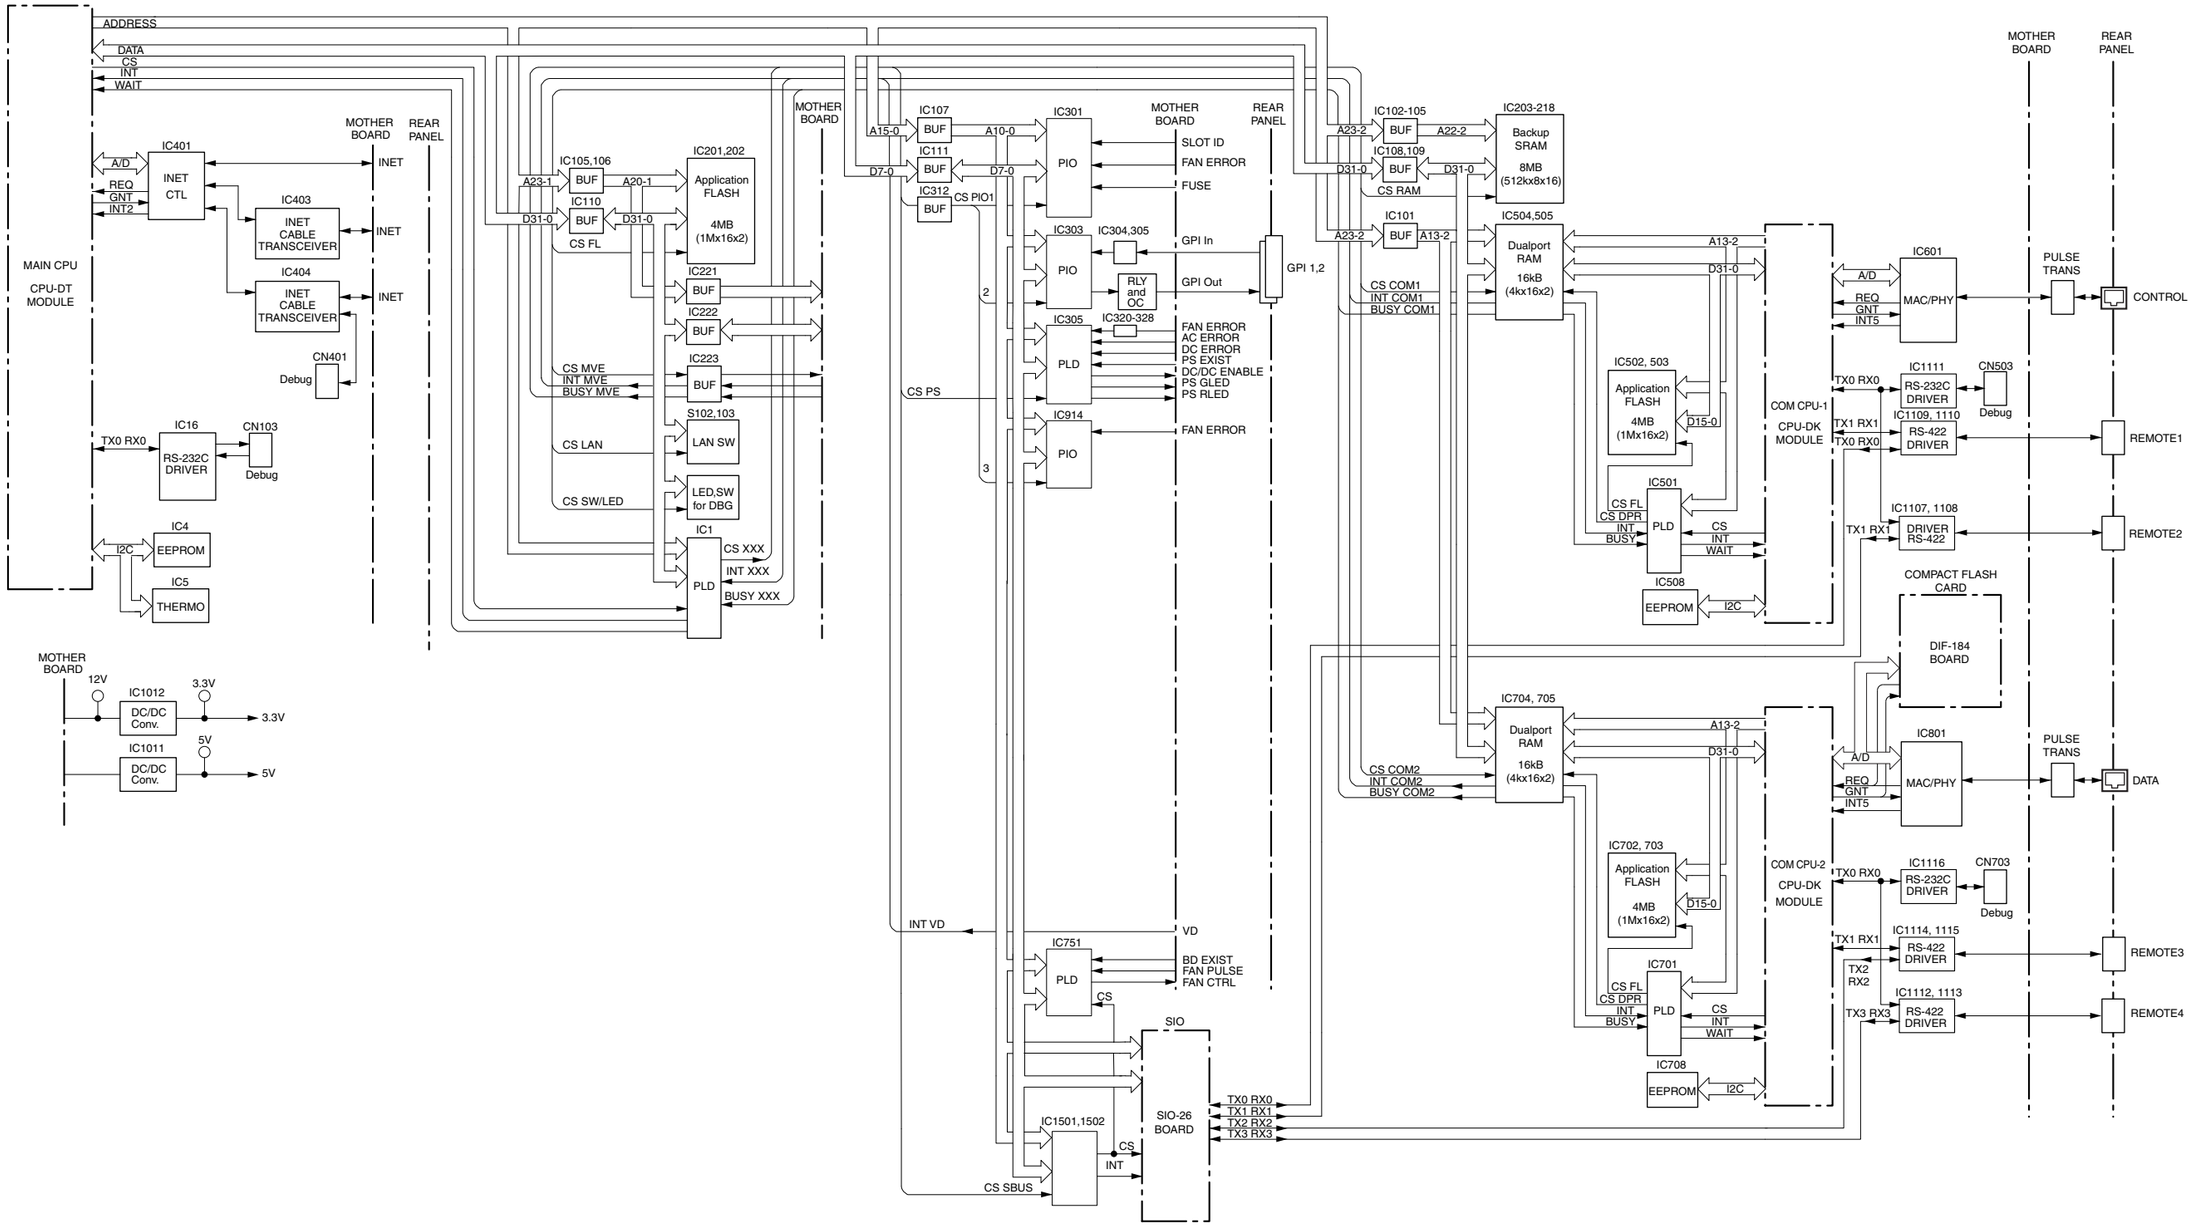


CPU Board
CA-54CFE


CNI-32, CNI-35

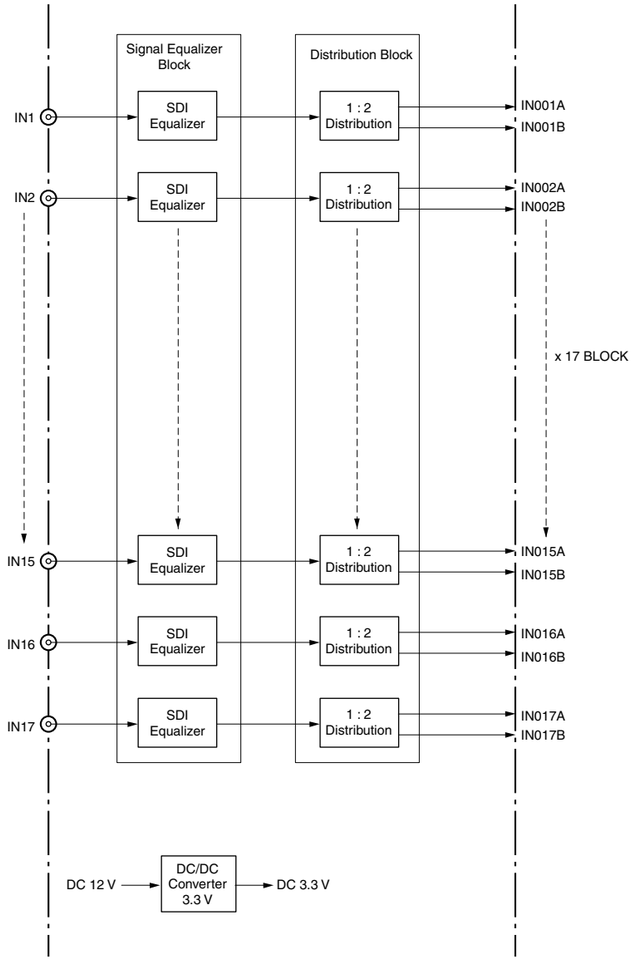


17-Input Board
CNI-32

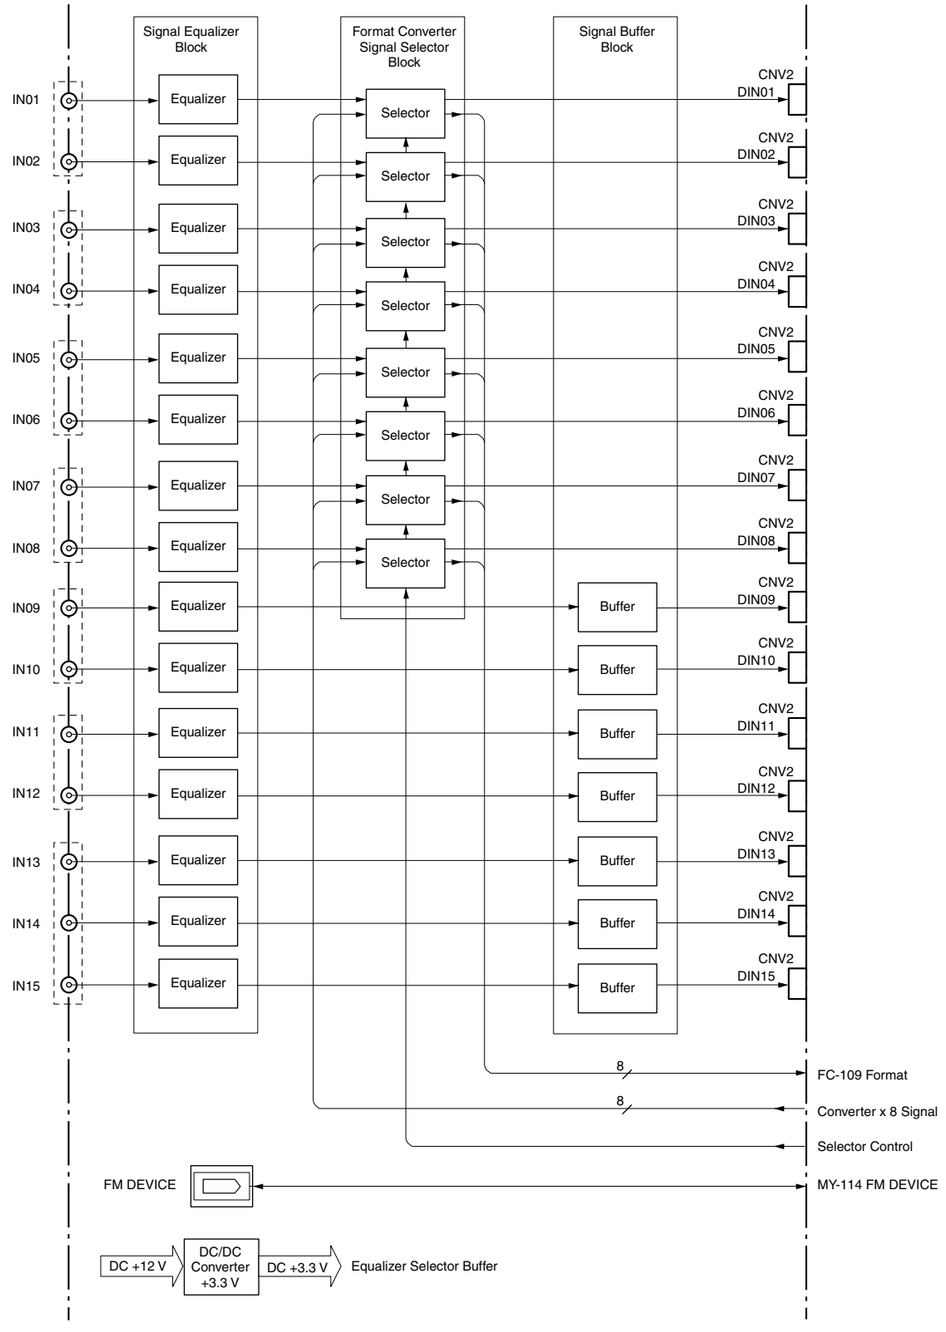


15-Input Board
CNI-35

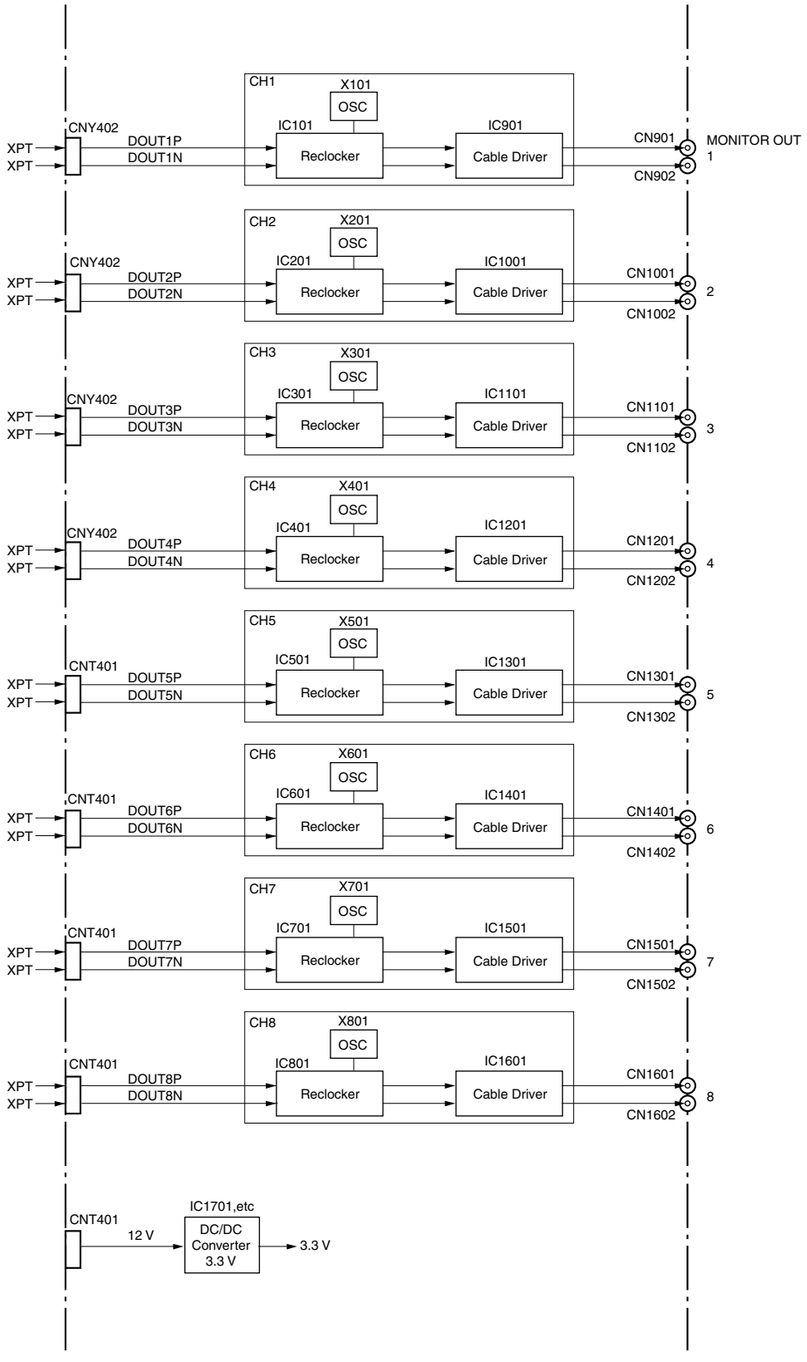


Monitor Output Board
CNO-24

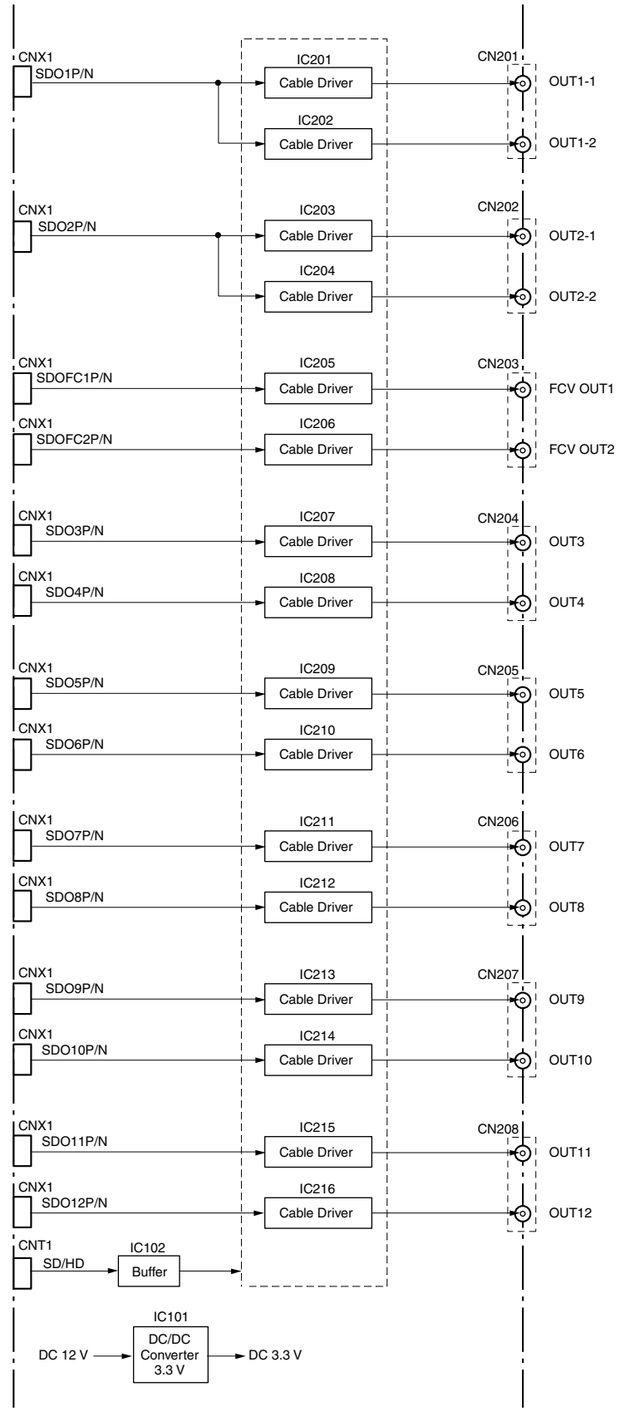

Output Board
CNO-35

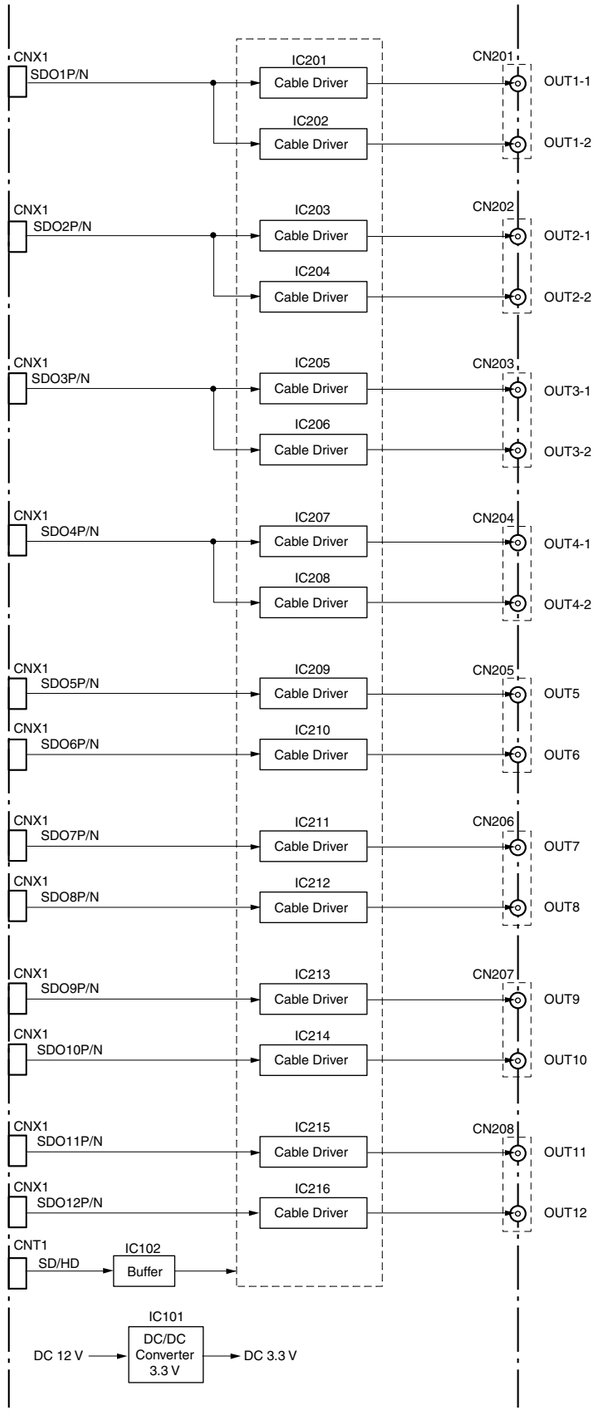


Output Board
CNO-36

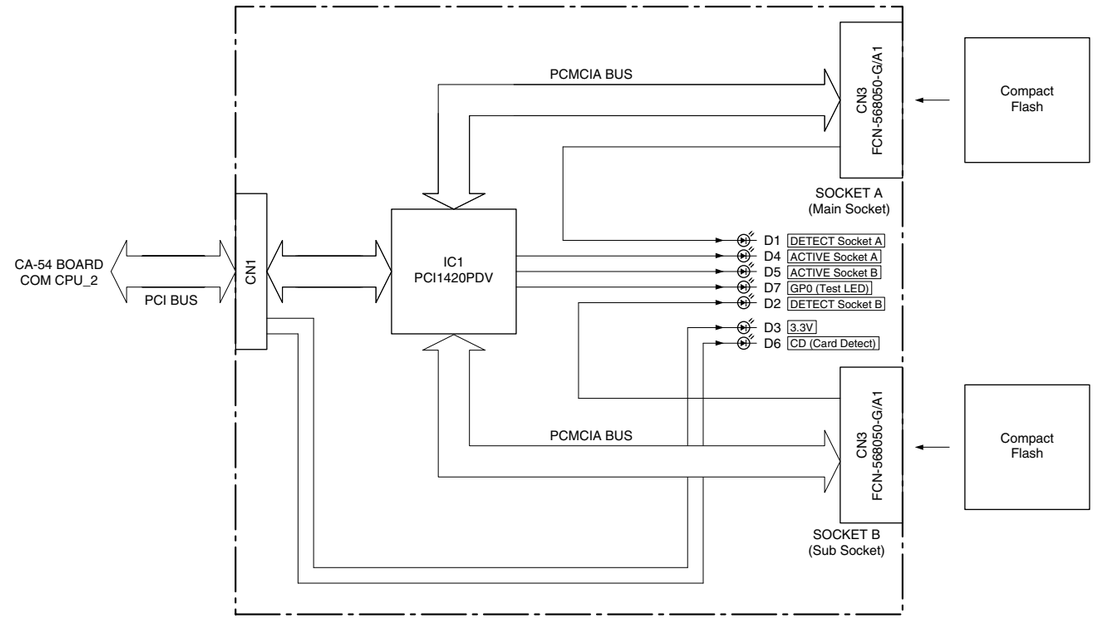


Compact Flash Interface Board
DIF-184

DVP-49 (1/2)

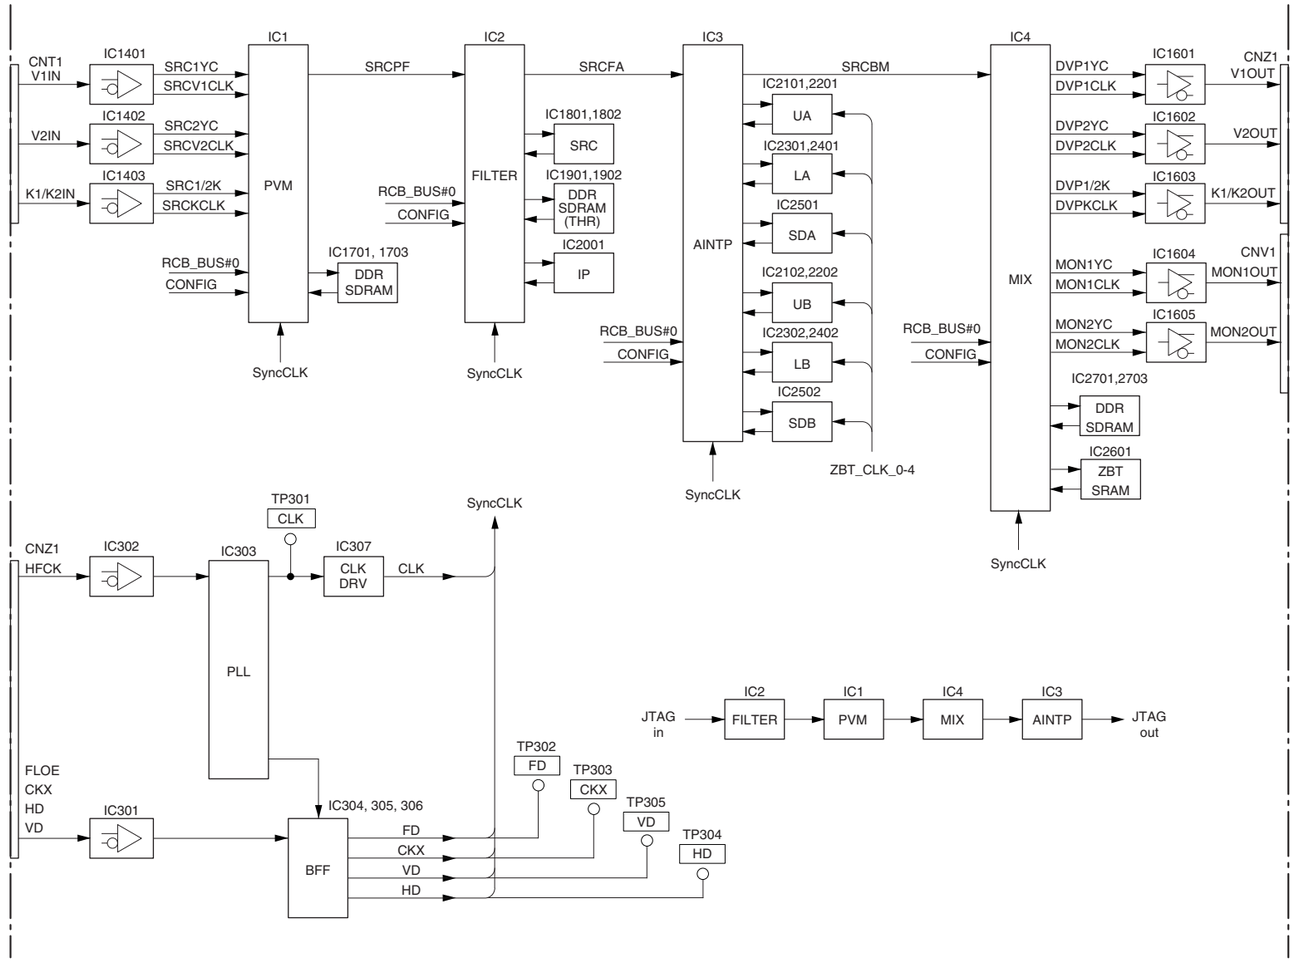


DME Board
DVP-49 (1/2)

3-8

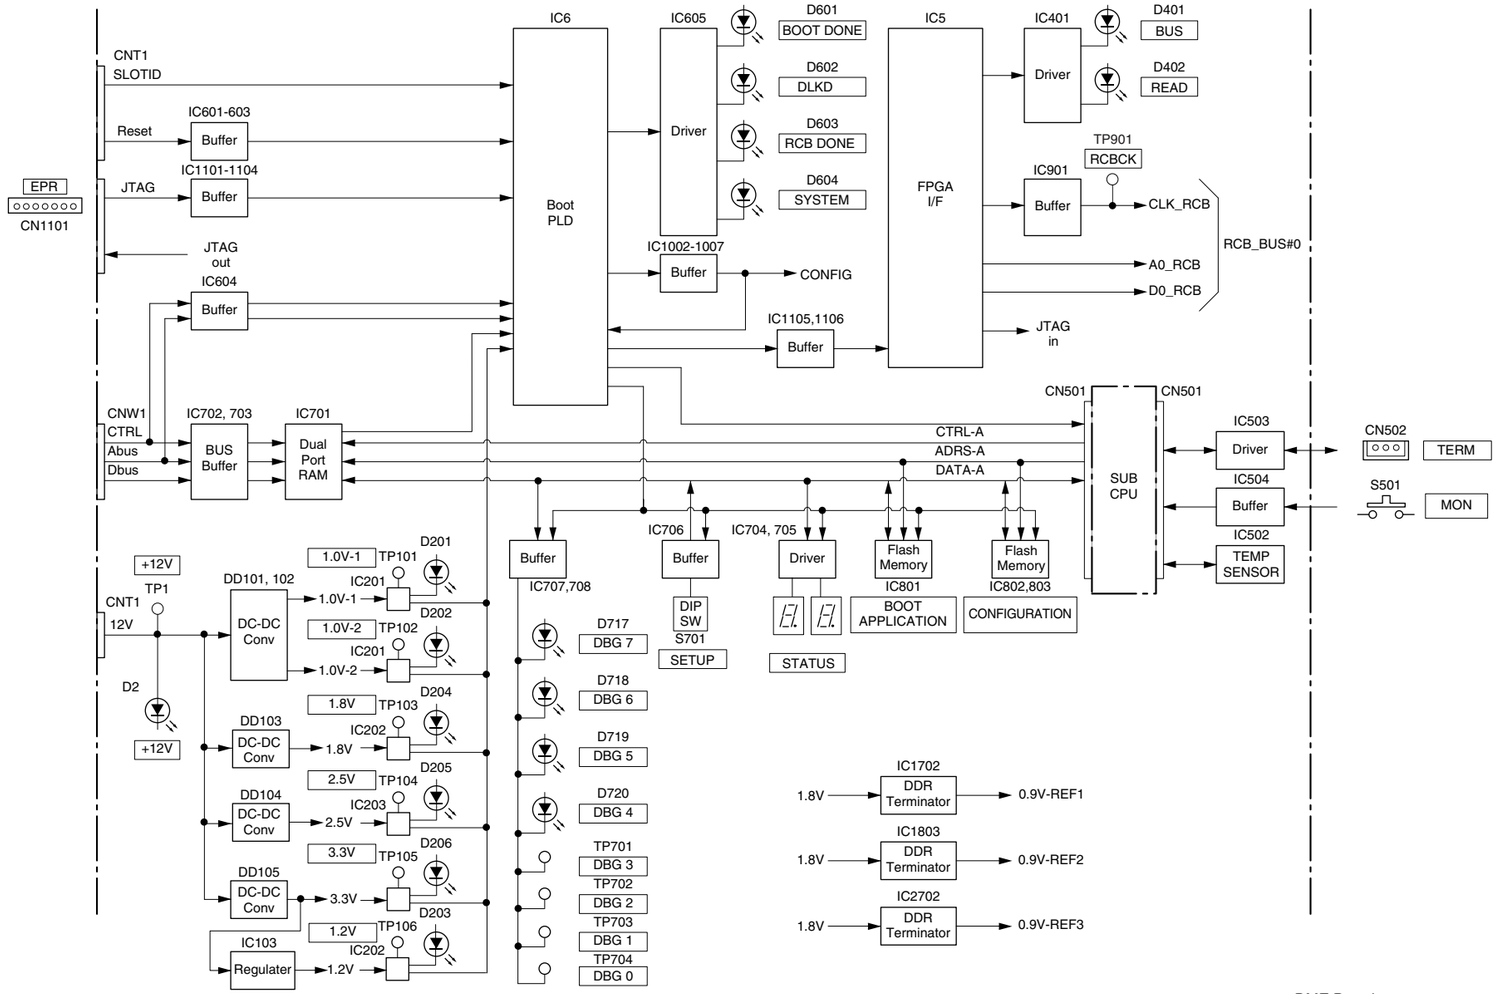


DME Board
DVP-49 (2/2)


VIDEO BLOCK

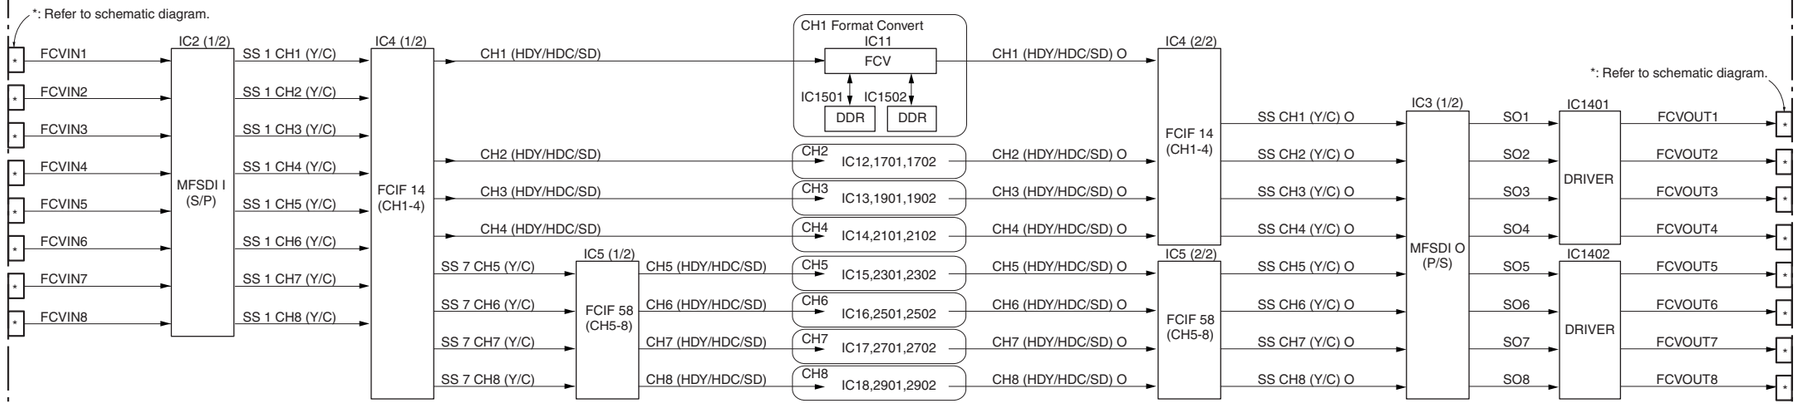


TIMING BLOCK

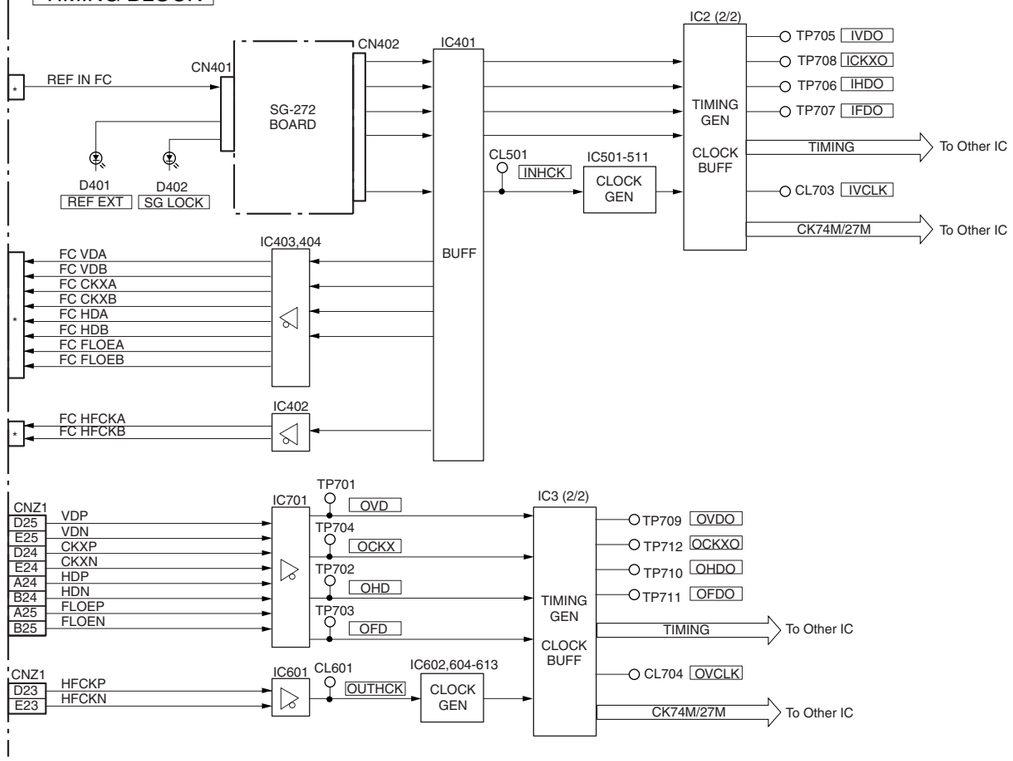


CONTROL BLOCK

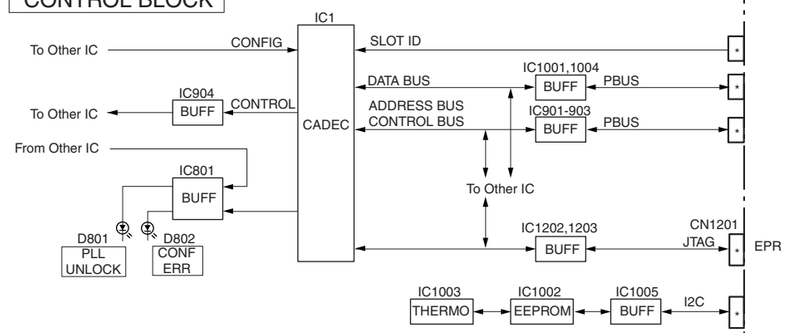


POWER BLOCK

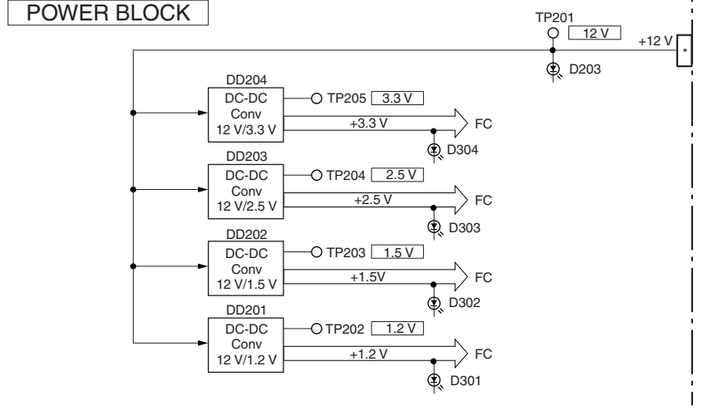


Format Converter Board
FC-109

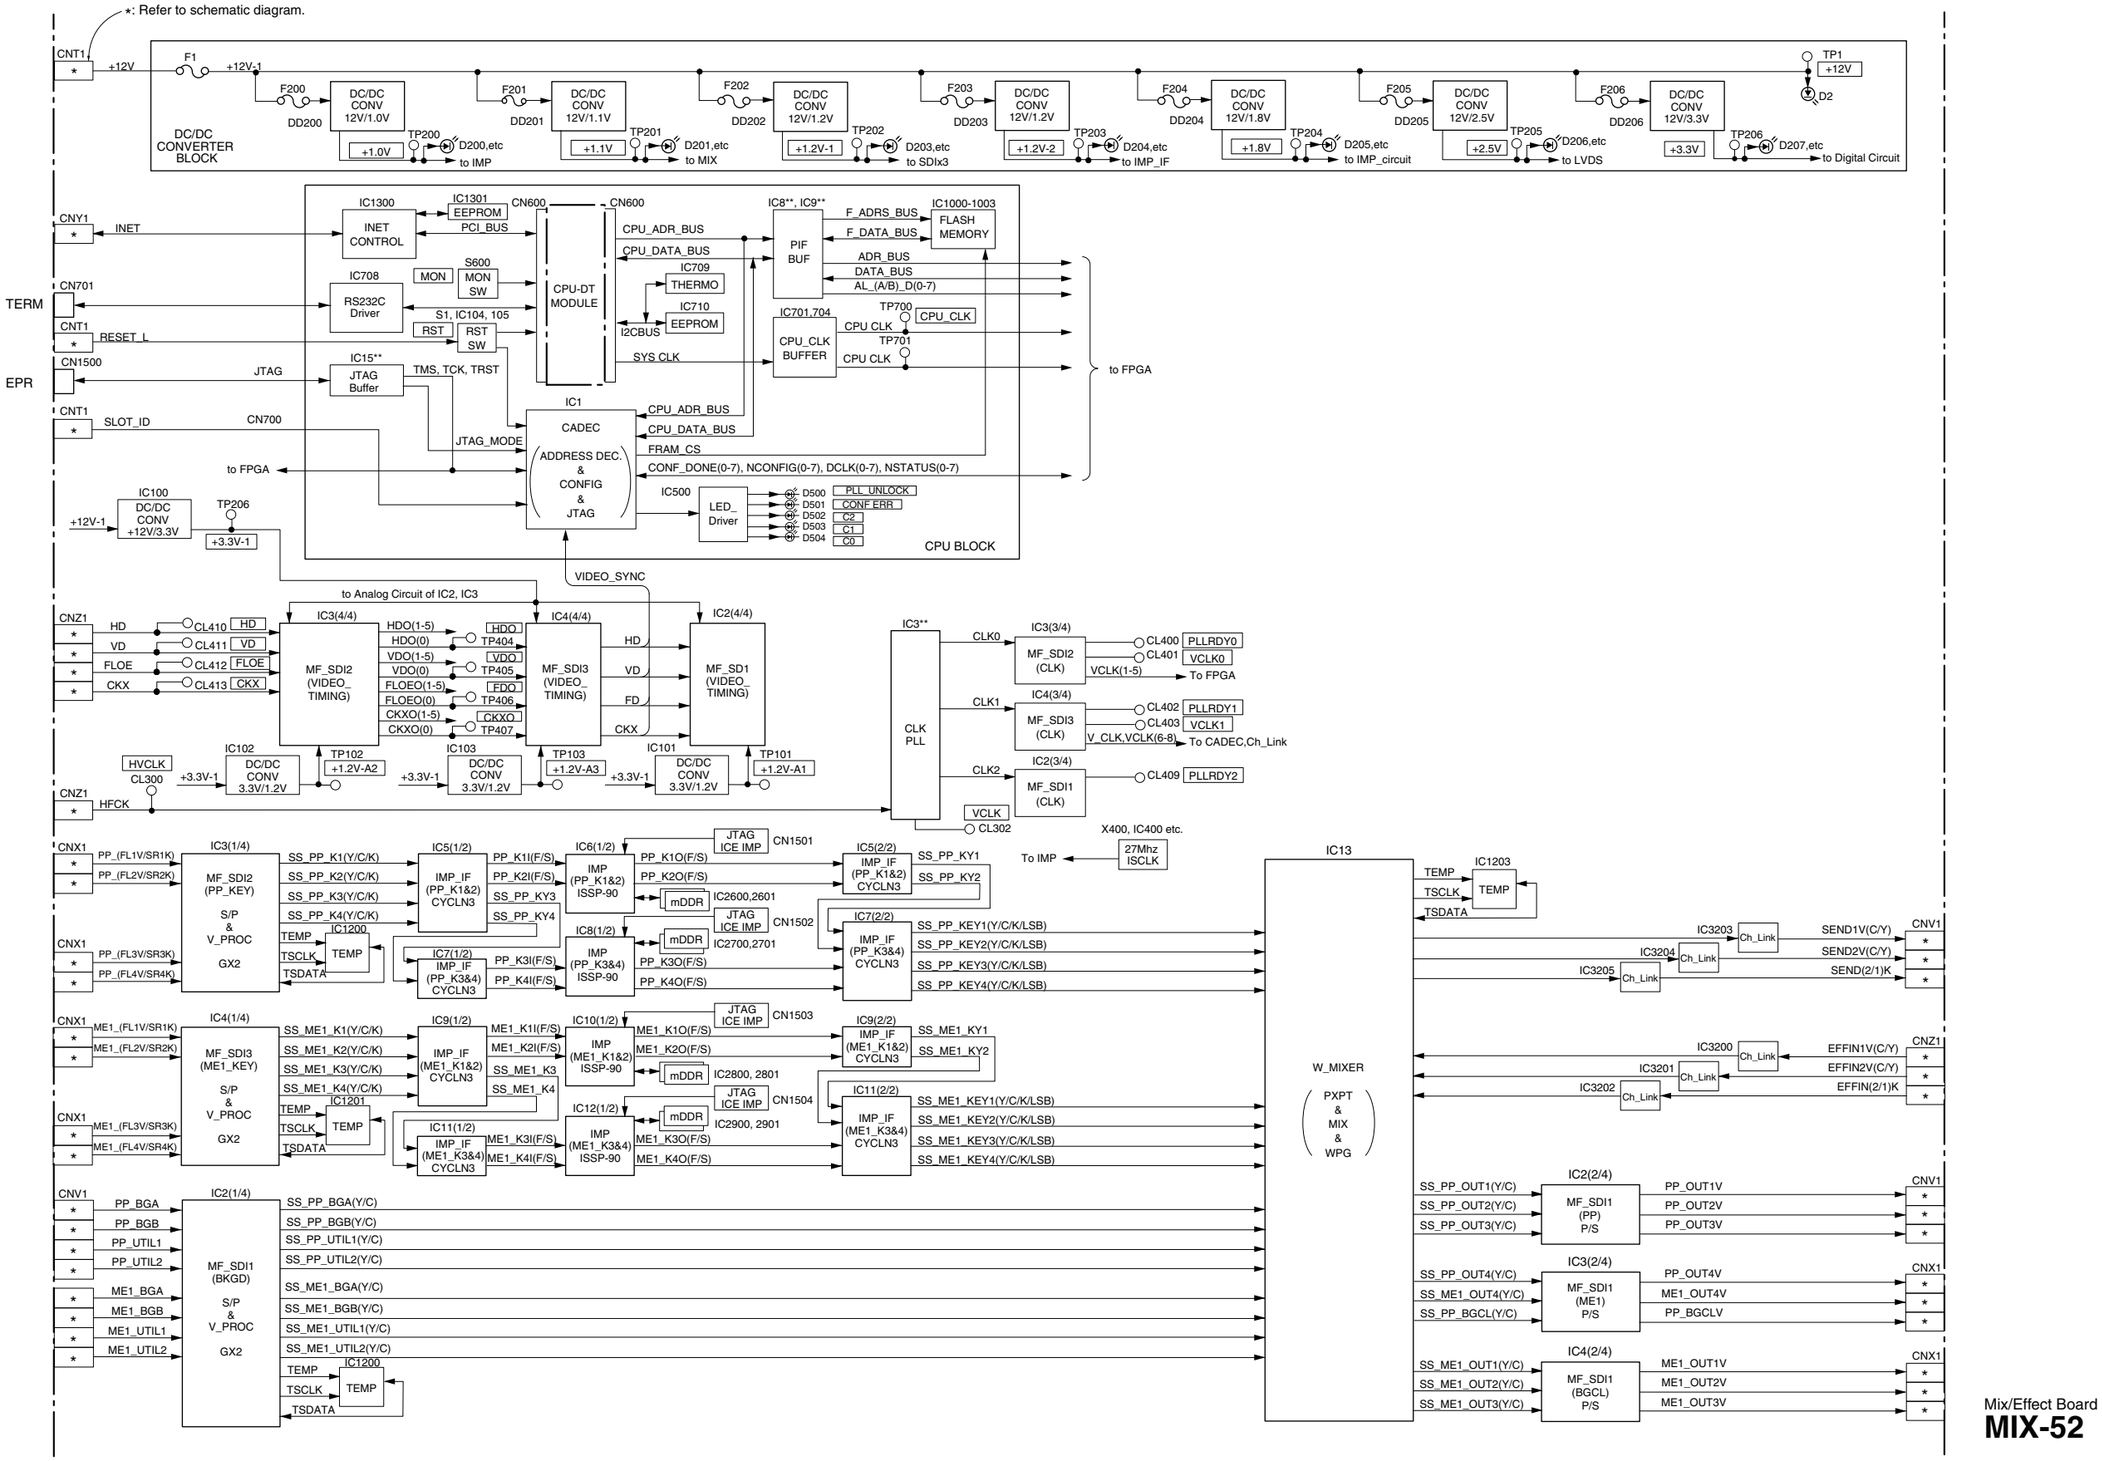

Mix/Effect Board
MIX-52

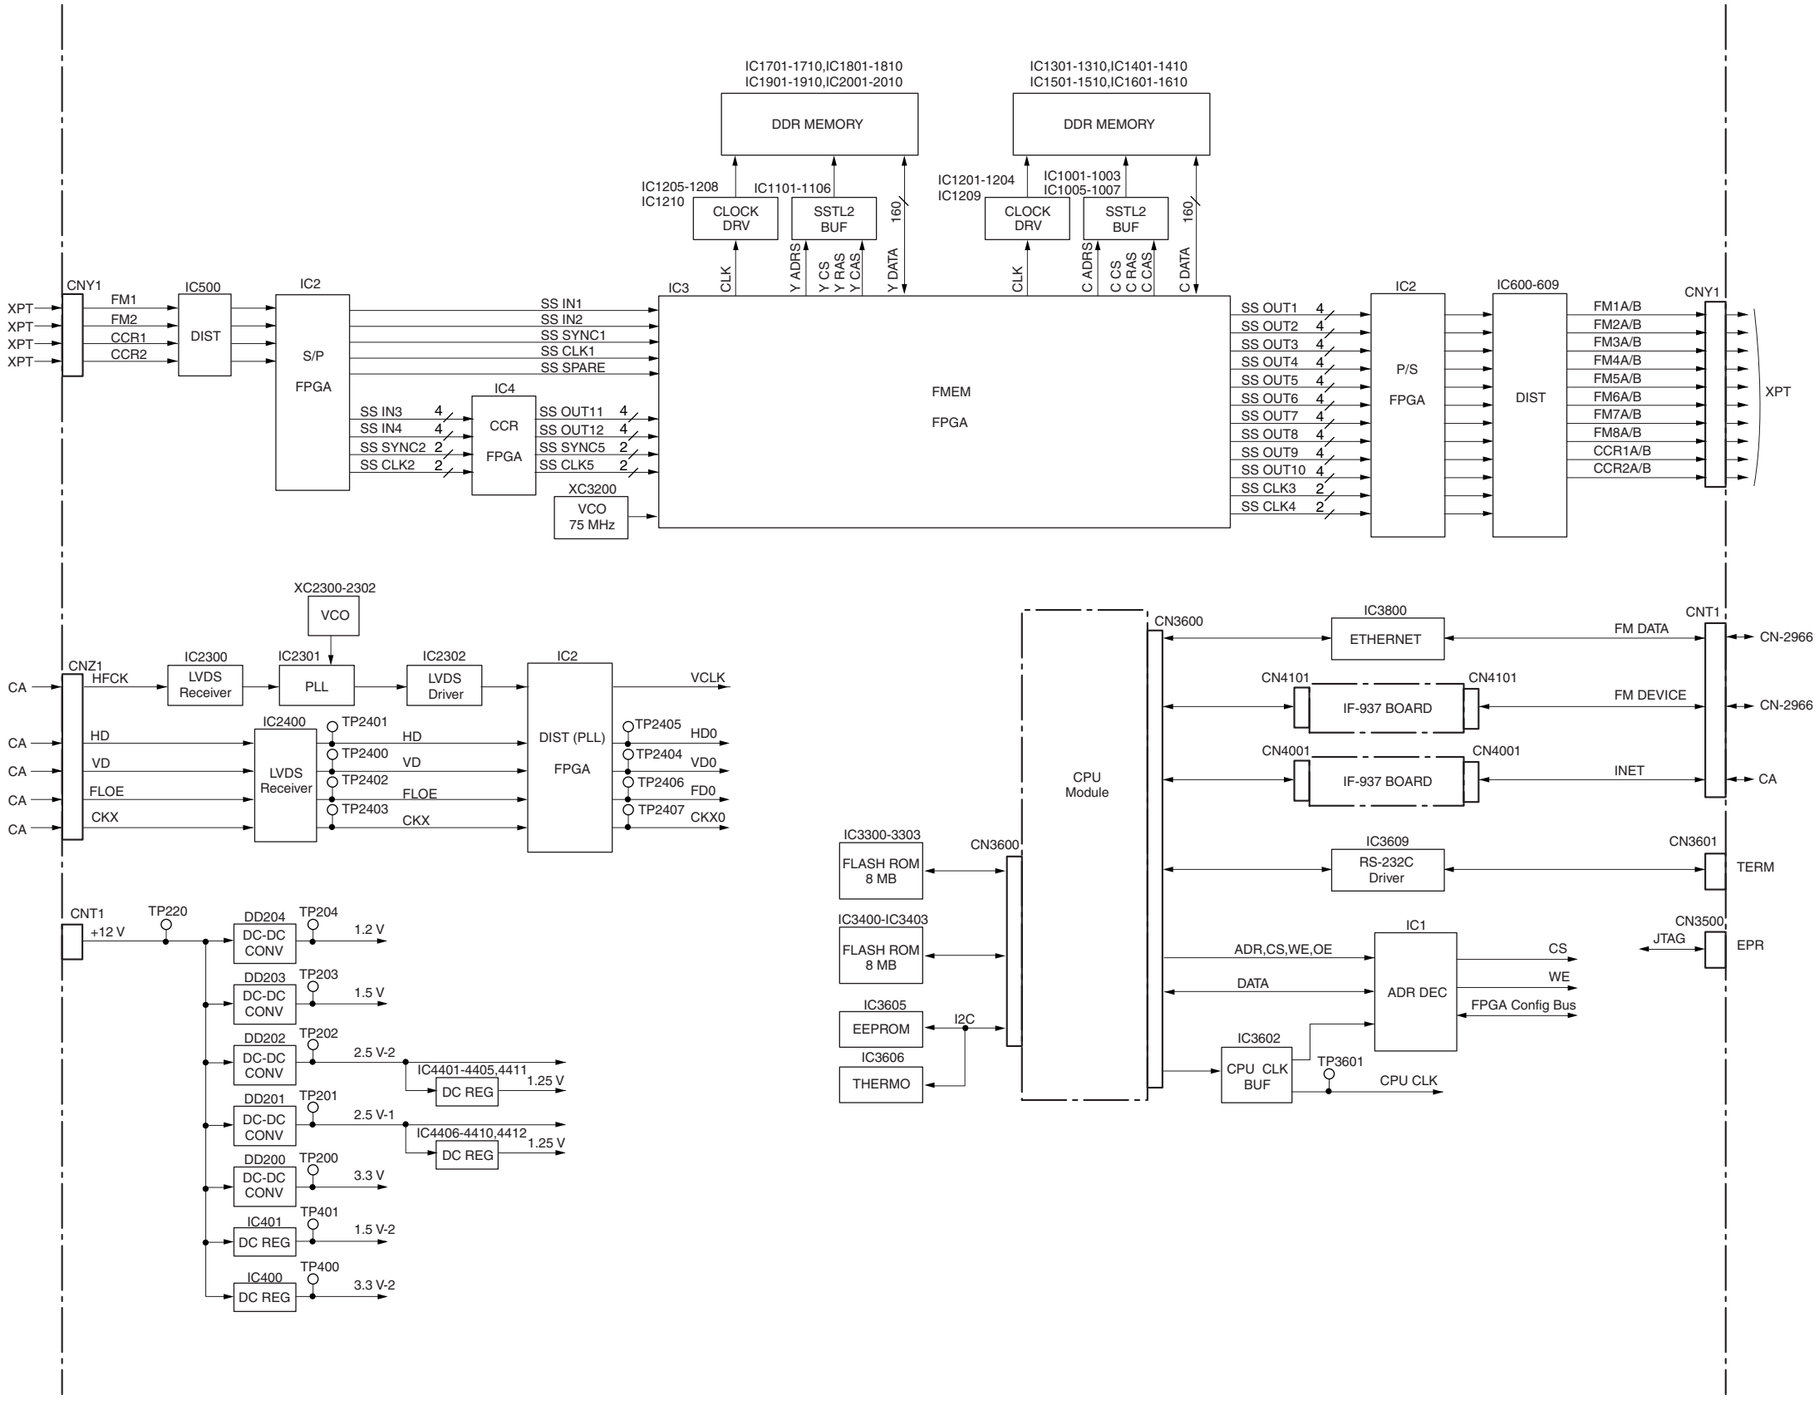


Frame Memory Board
MY-114

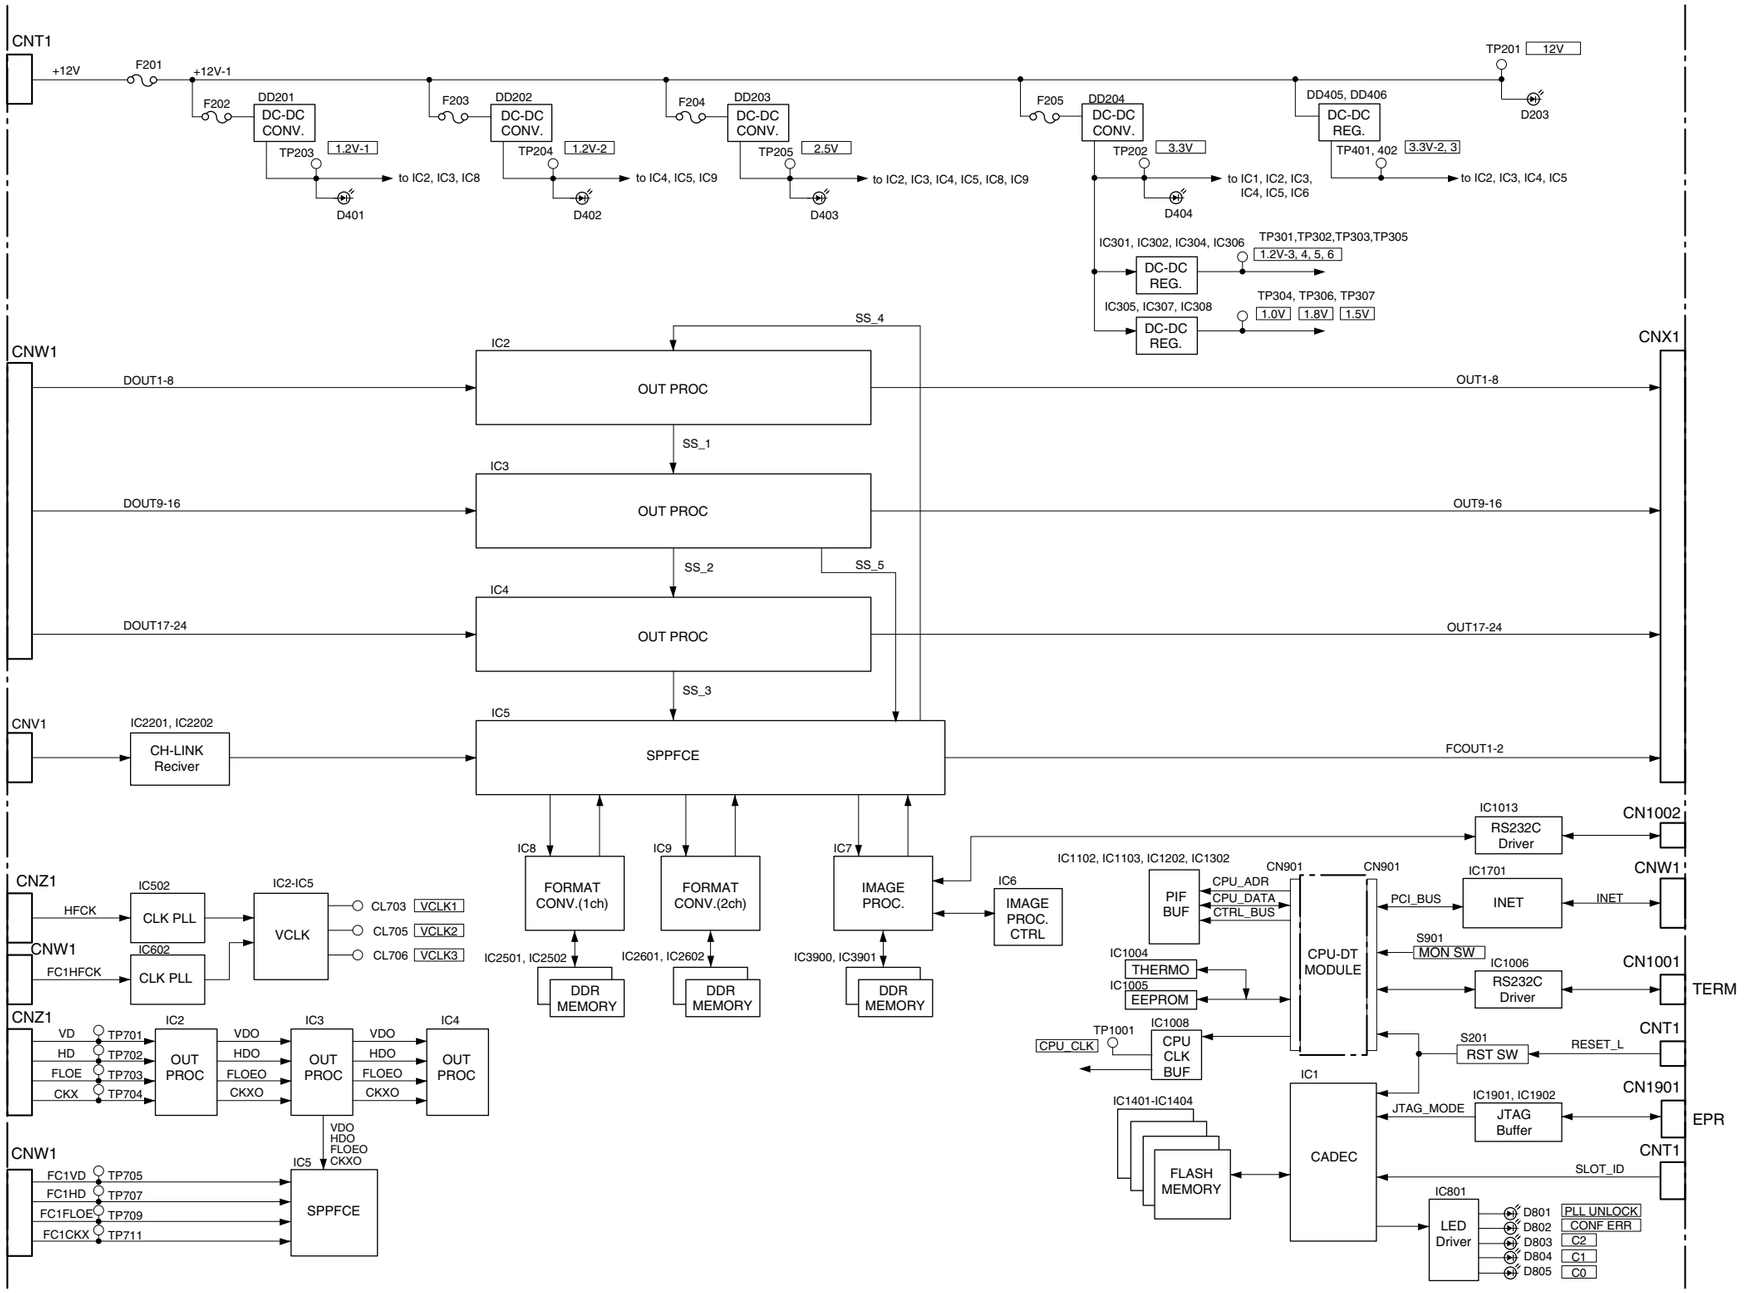


Output Board
OUT-33

SG-272, SIO-26

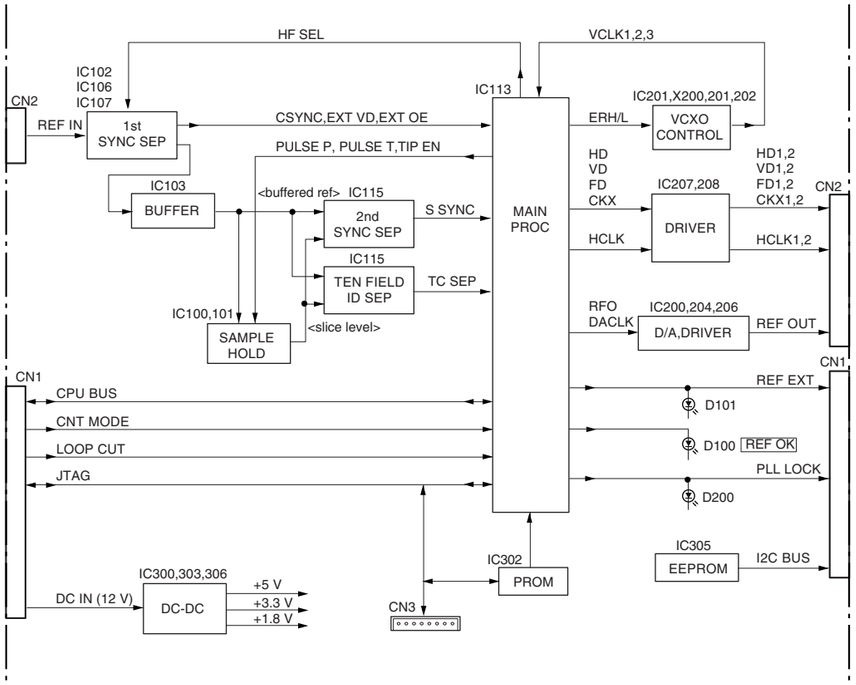


Signal Generator Board
SG-272

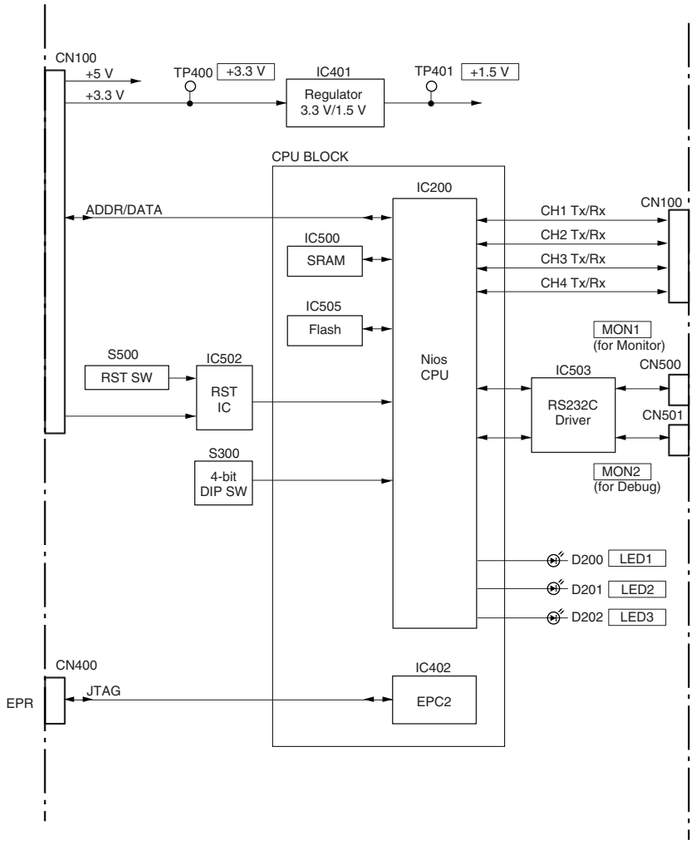

Serial Interface Board
SIO-26

3-14

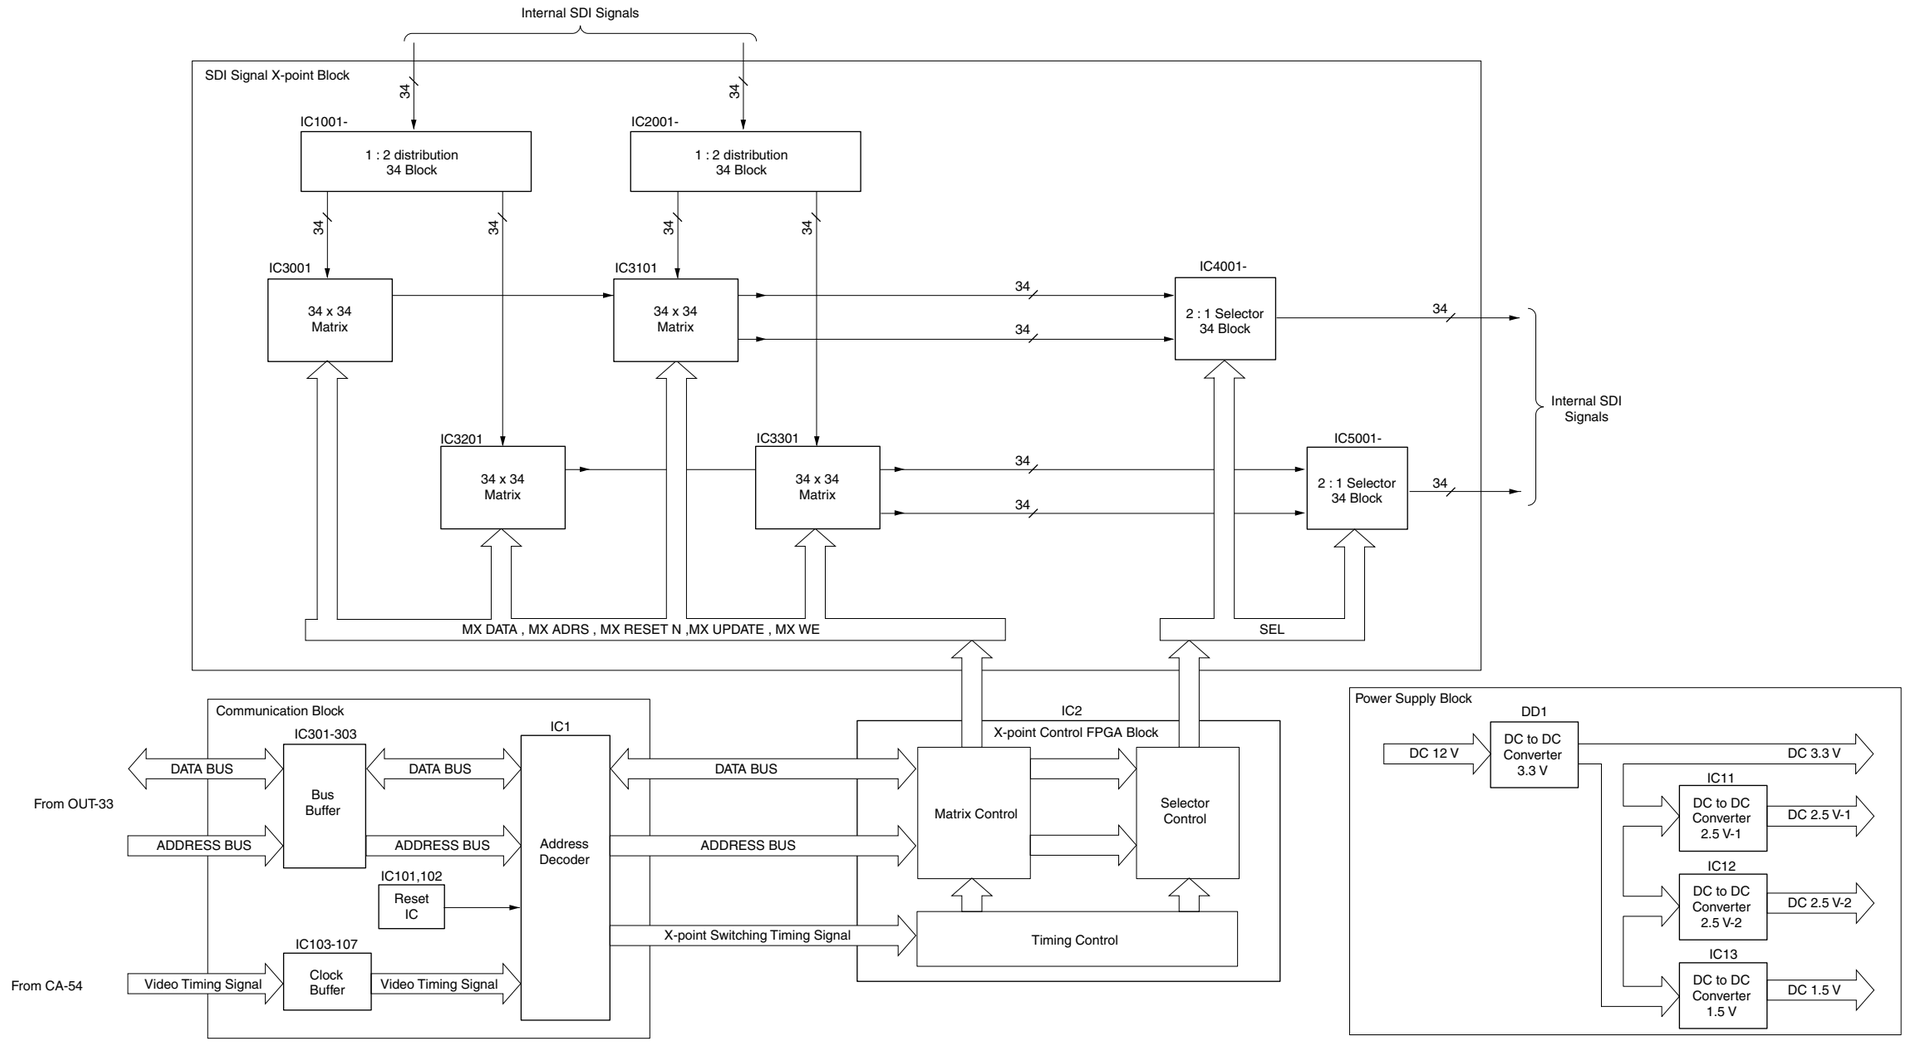

Cross Point Board
XPT-29

Section 4
Schematic Diagrams

Index


Board Name	Page
CA-54C	4-2
CA-54CFE	4-30
CN-3141	4-58
CN-3147	4-59
CNI-32	4-60
CNI-35	4-63
CNO-24	4-66
CNO-35	4-70
CNO-36	4-72
DIF-184	4-74
DVP-49	4-77
FC-109	4-108
HN-305A	4-142
IF-937	4-143
MB-1133	4-144
MIX-52	4-153
MY-114	4-193
OUT-33	4-238
SG-272	4-273
SIO-26	4-276
XPT-29	4-281
Frame Wiring	4-304

Index

Front (Option)	Main Board	(Piggyback Board)	Rear (Option)	Main Board
	OUT-33	(CPU-DT)		CNO-36
	XPT-29			CNO-35
	MIX-52	(CPU-DT)	(MKS-8161M)	CNO-24
(MKS-6470)	DVP-49	(CPU-DT)	(MKS-8110G)	CNI-32
(MKS-8450G)	FC-109	(SG-272)	(MKS-8110G)	CNI-32
(MKS-8442G)	MY-114	(CPU-DT, IF-937 (× 2))		CNI-35
(MKS-6470)	CA-54CFE	(CPU-DK (× 2), CPU-DT, SIO-26, DIF-184)		CN-3141
	CA-54C	(CPU-DK (× 2), CPU-DT, SIO-26, SG-272)		CN-3147


4-1

CA-54C (1/17)
SUFFIX: -24

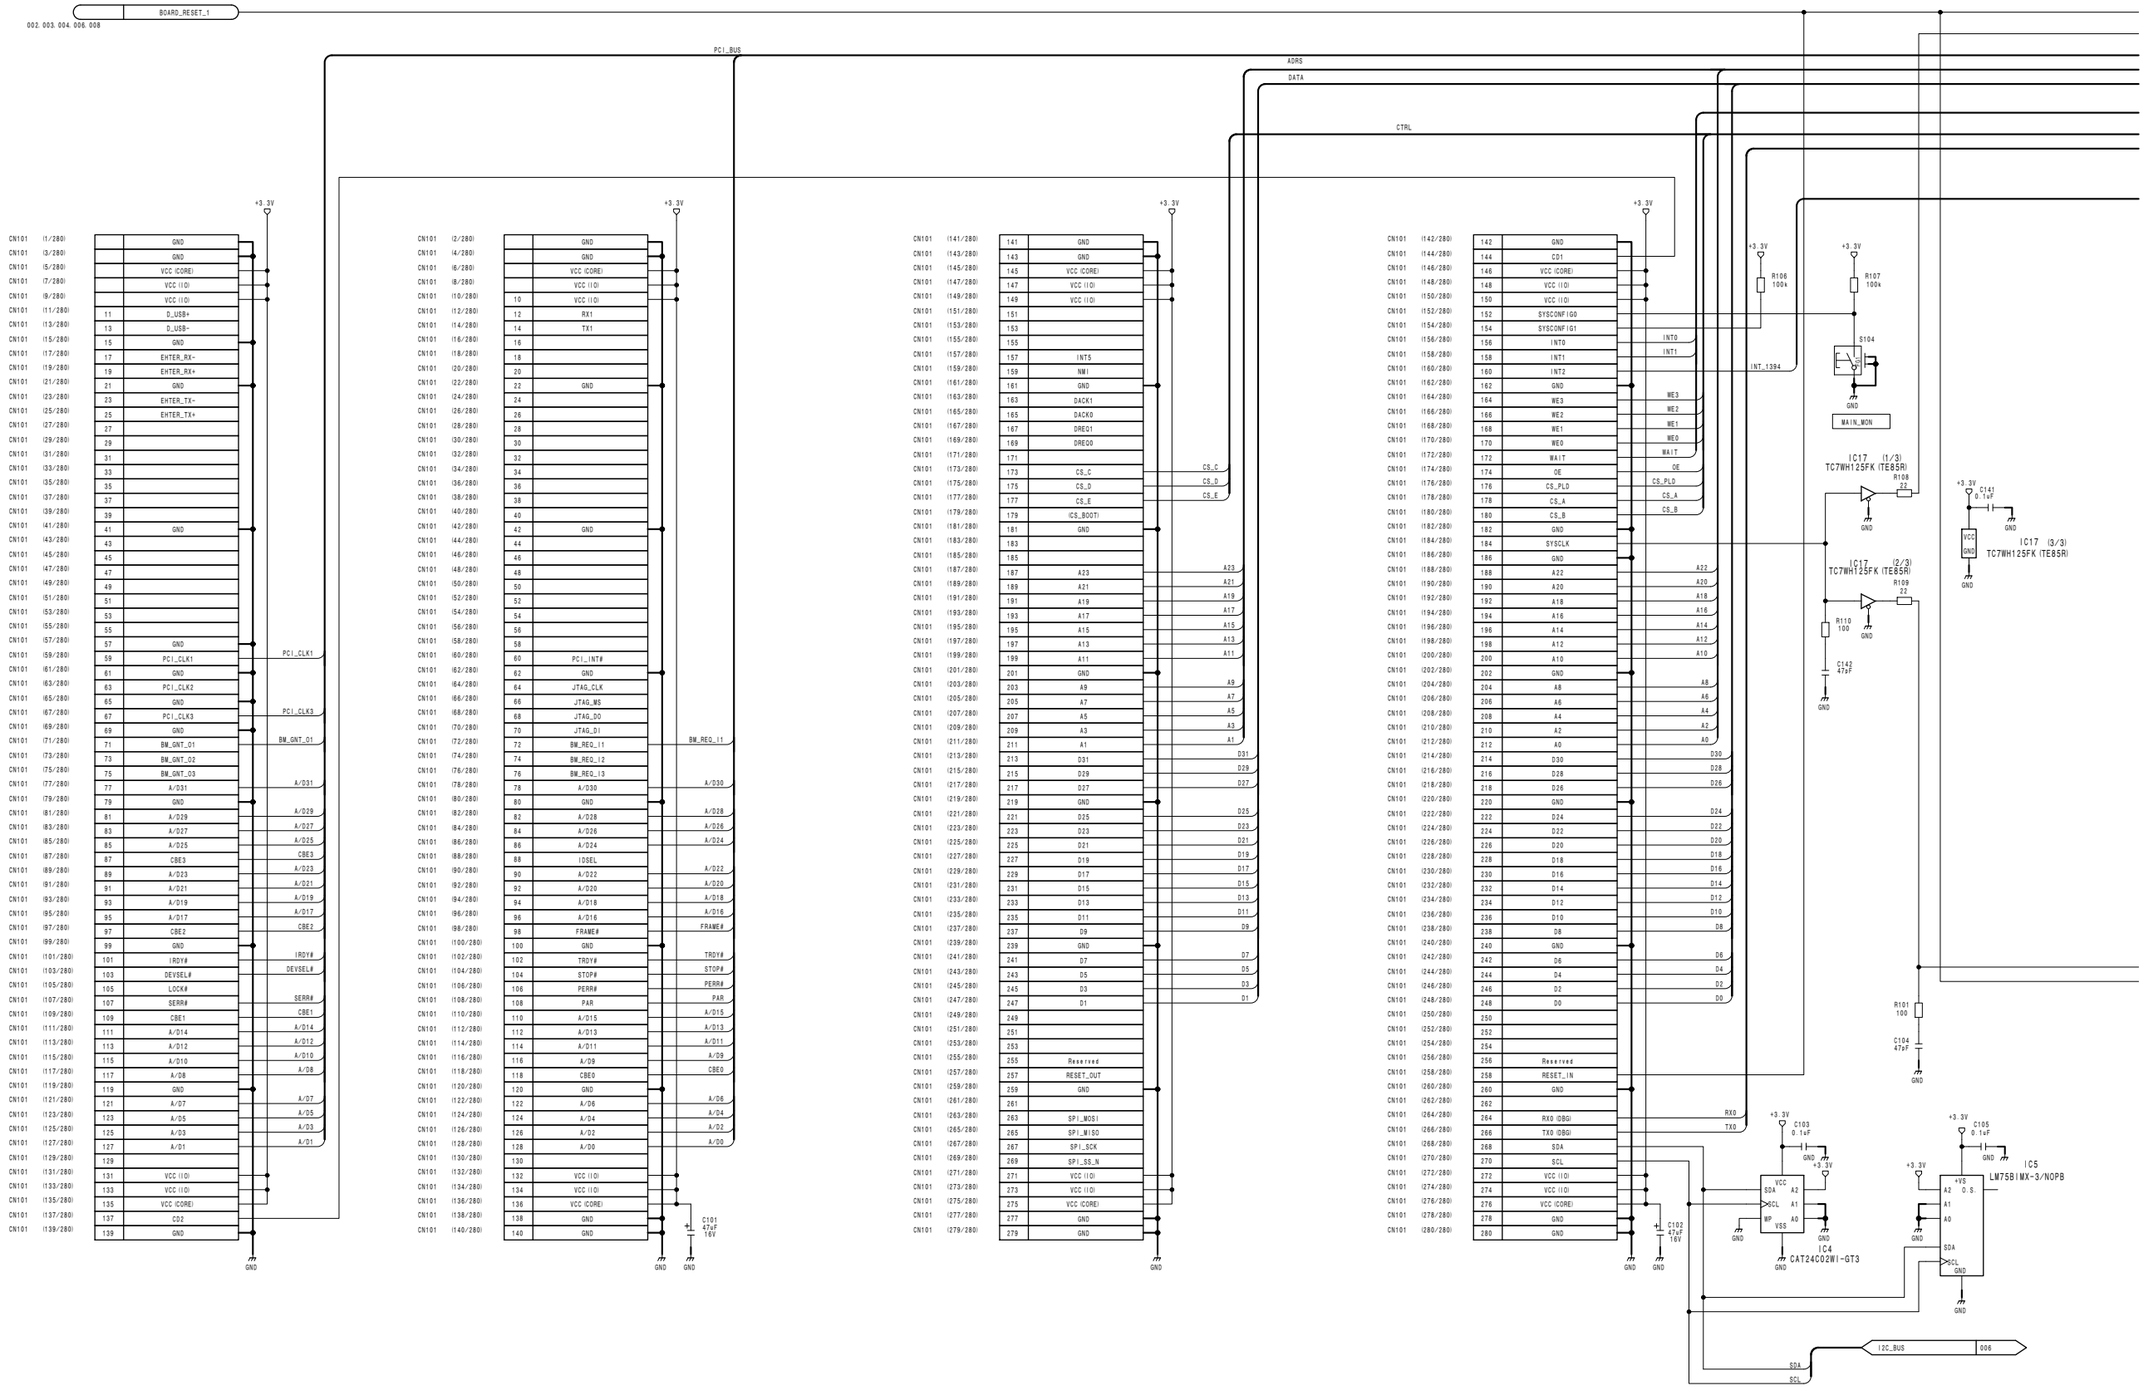



4-2

CA-54C (1/17) **SUFFIX: -24**

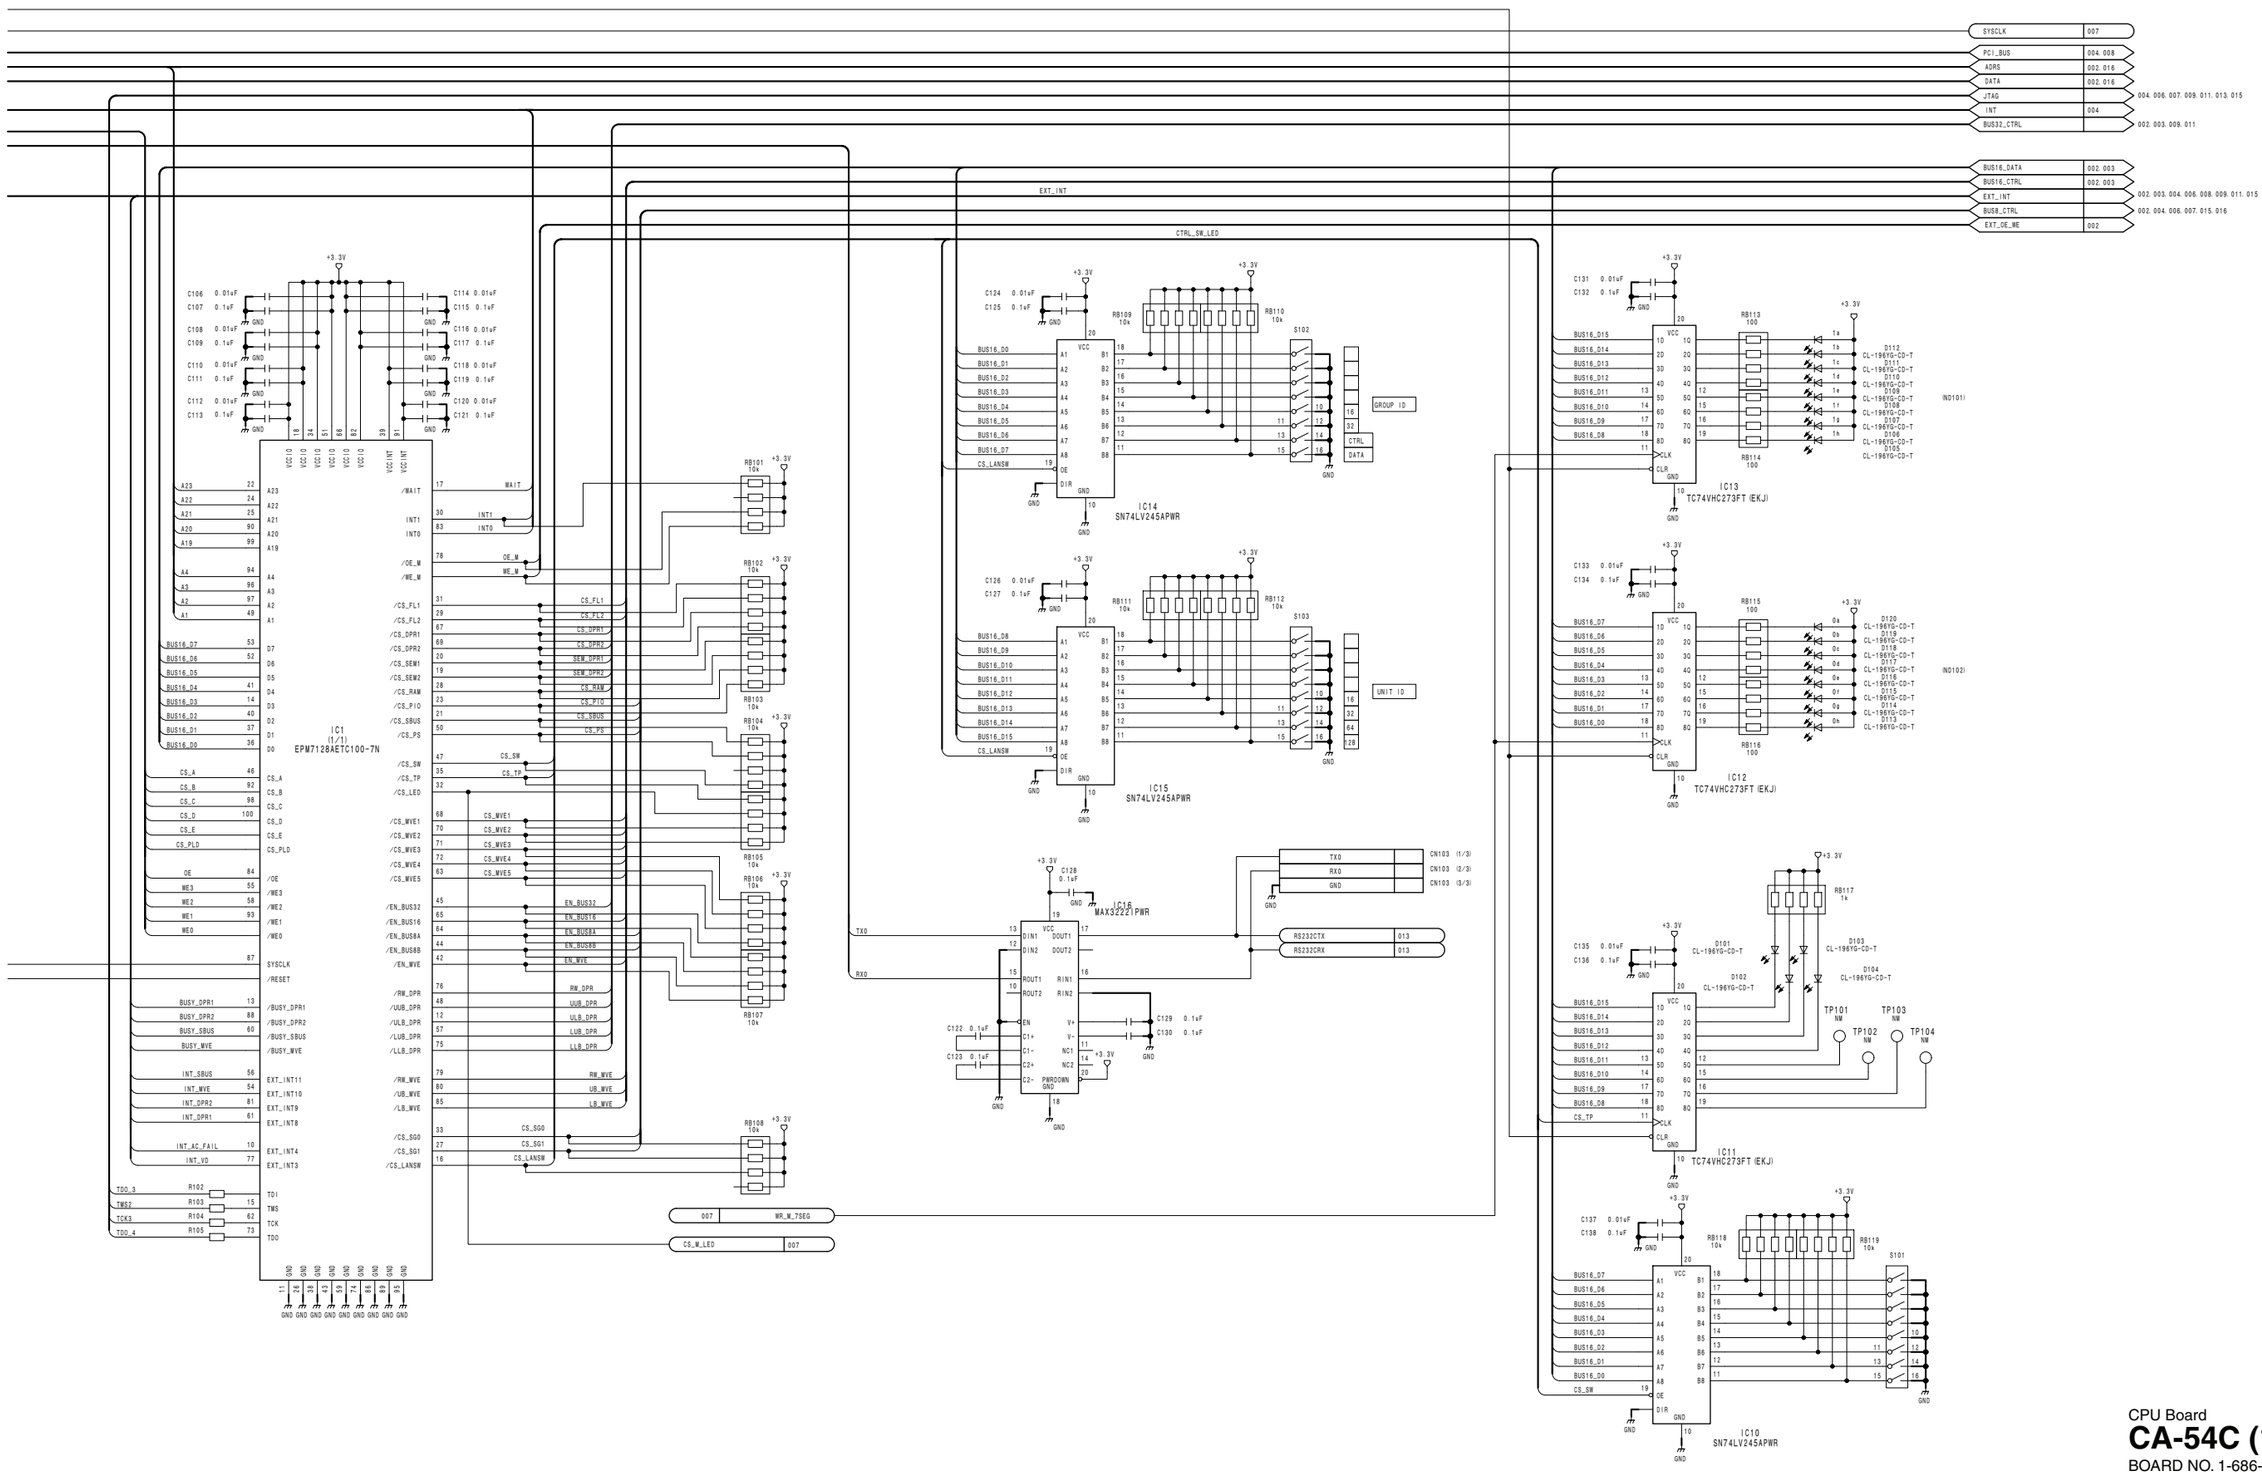


CPU Board
CA-54C (1/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_1

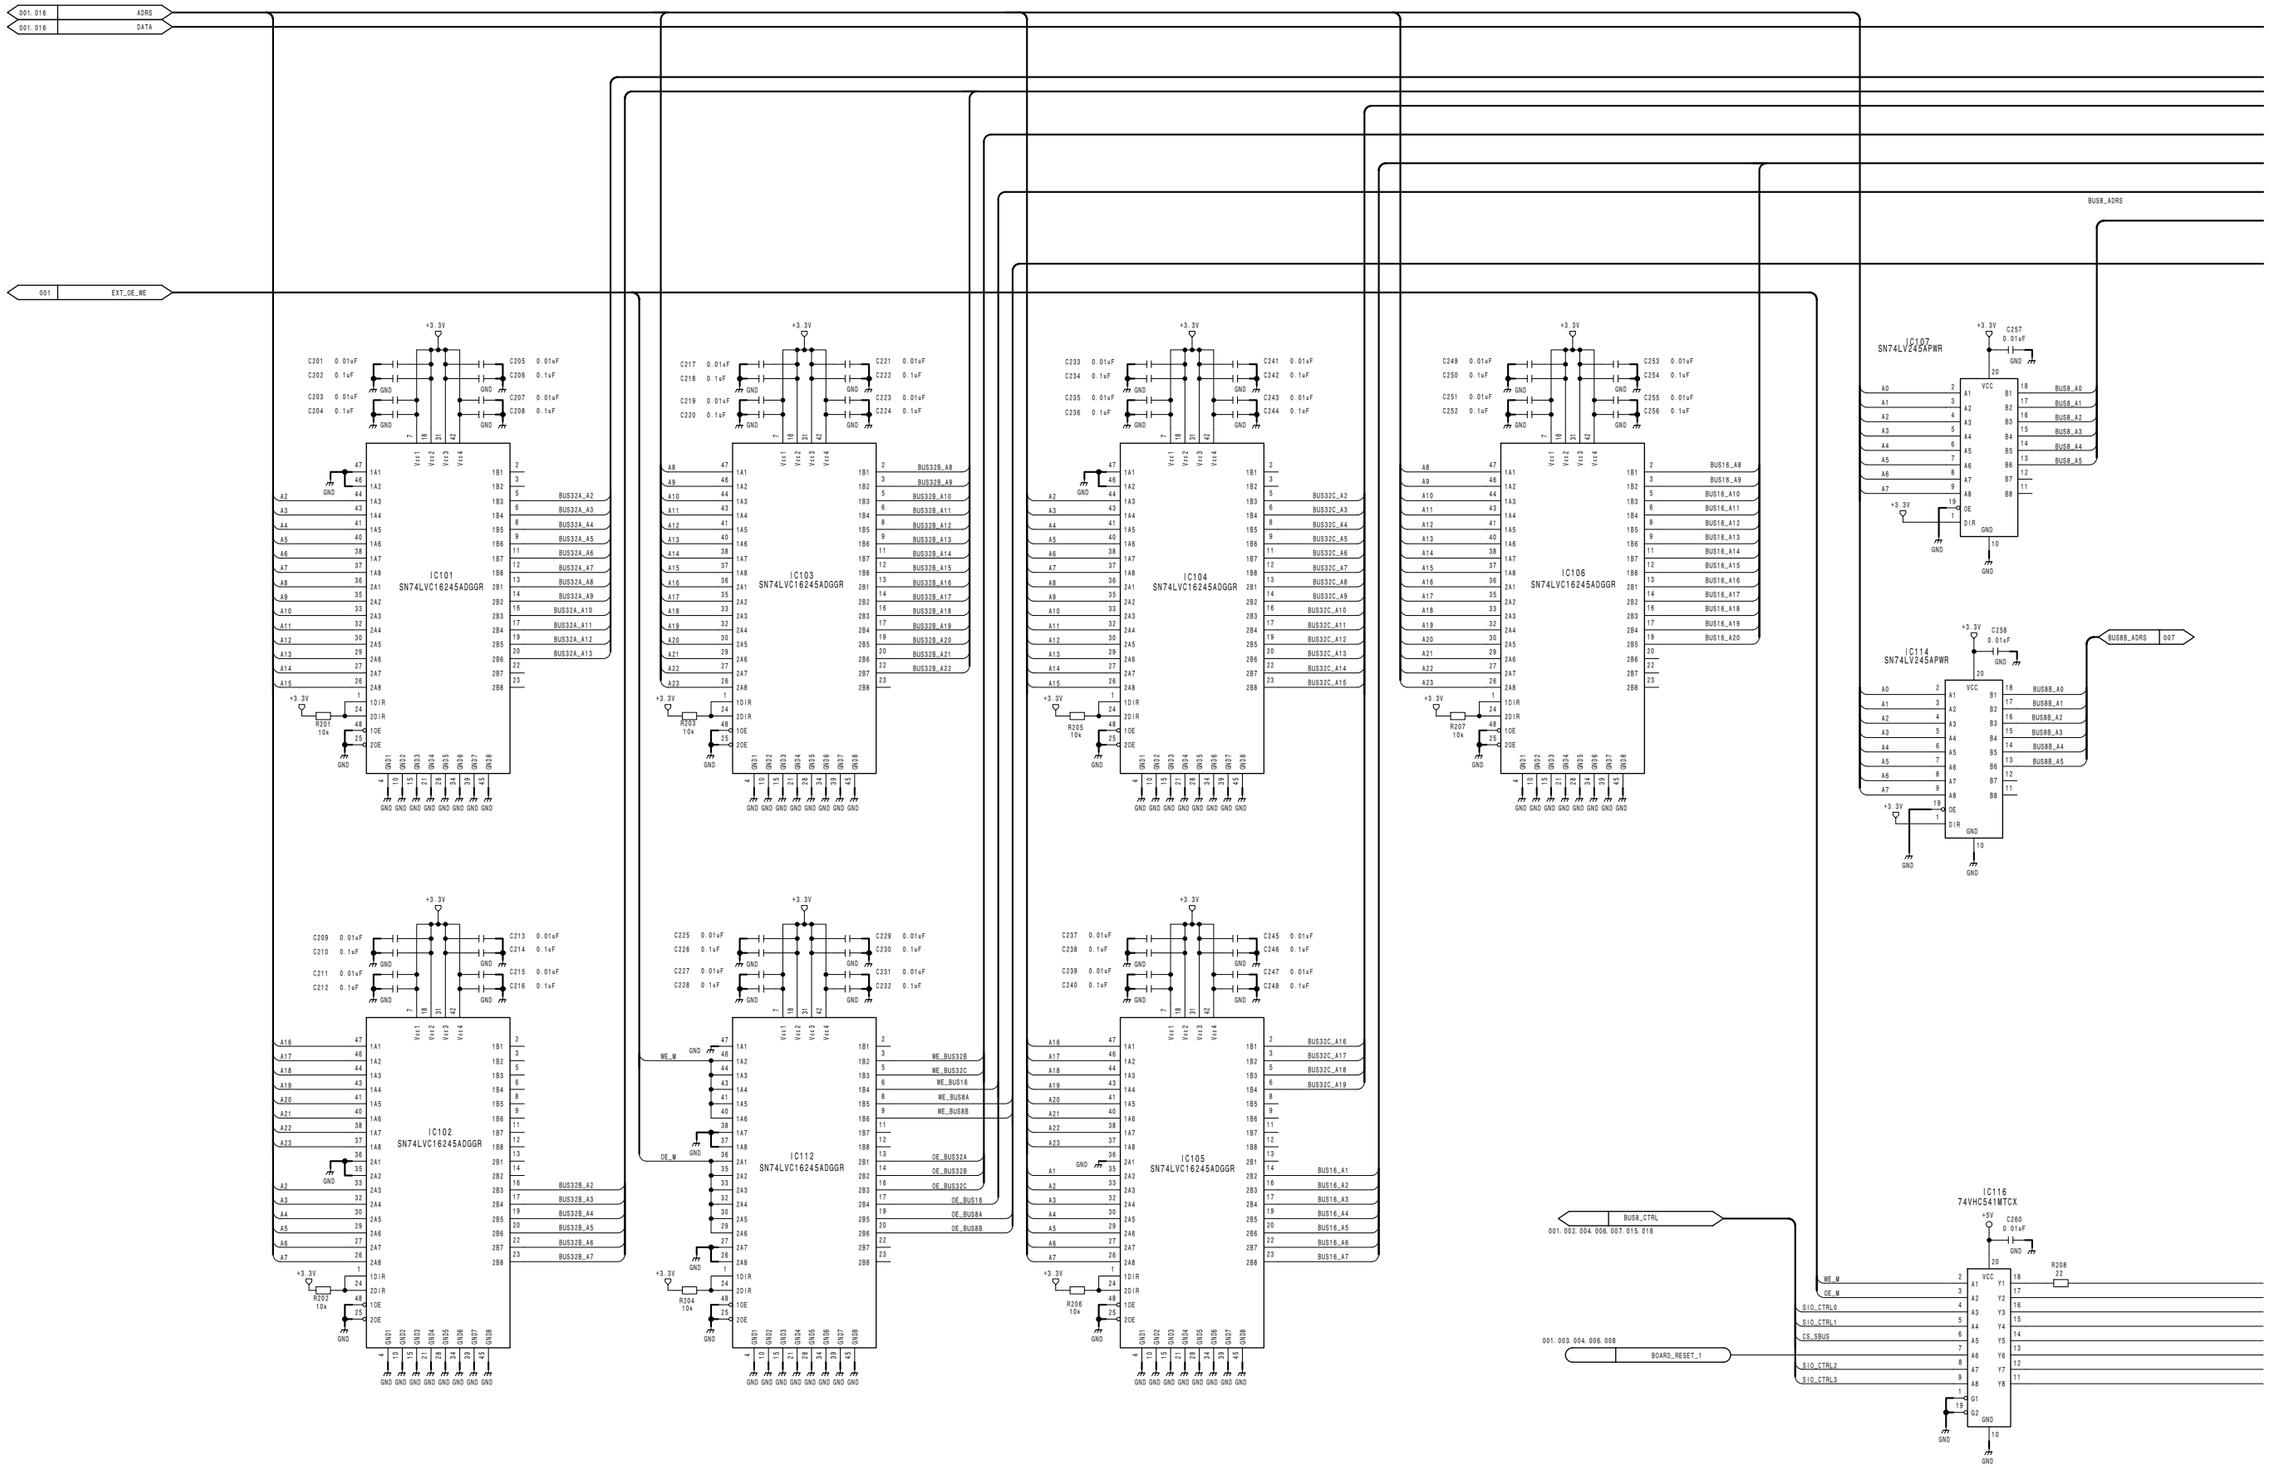
001.016 ADRS
001.016 DATA
001 EXT_OE_WE
IC101 SN74LVC16245ADGGR
IC102 SN74LVC16245ADGGR
IC103 SN74LVC16245ADGGR
IC104 SN74LVC16245ADGGR
IC105 SN74LVC16245ADGGR
IC106 SN74LVC16245ADGGR
IC112 SN74LVC16245ADGGR
IC107 SN74LV245APWR
IC114 SN74LV245APWR
IC116 74VHC541MTCX
BUS8_ADRS
BUS8B_ADRS 007
BUS8_CTRL
001. 002. 004. 006. 007. 015. 016
001. 003. 004. 006. 008
BOARD_RESET_1
WE_W
OE_W
SIO_CTRL0
SIO_CTRL1
CS_SBUS
SIO_CTRL2
SIO_CTRL3
+3.3V
+5V
GND

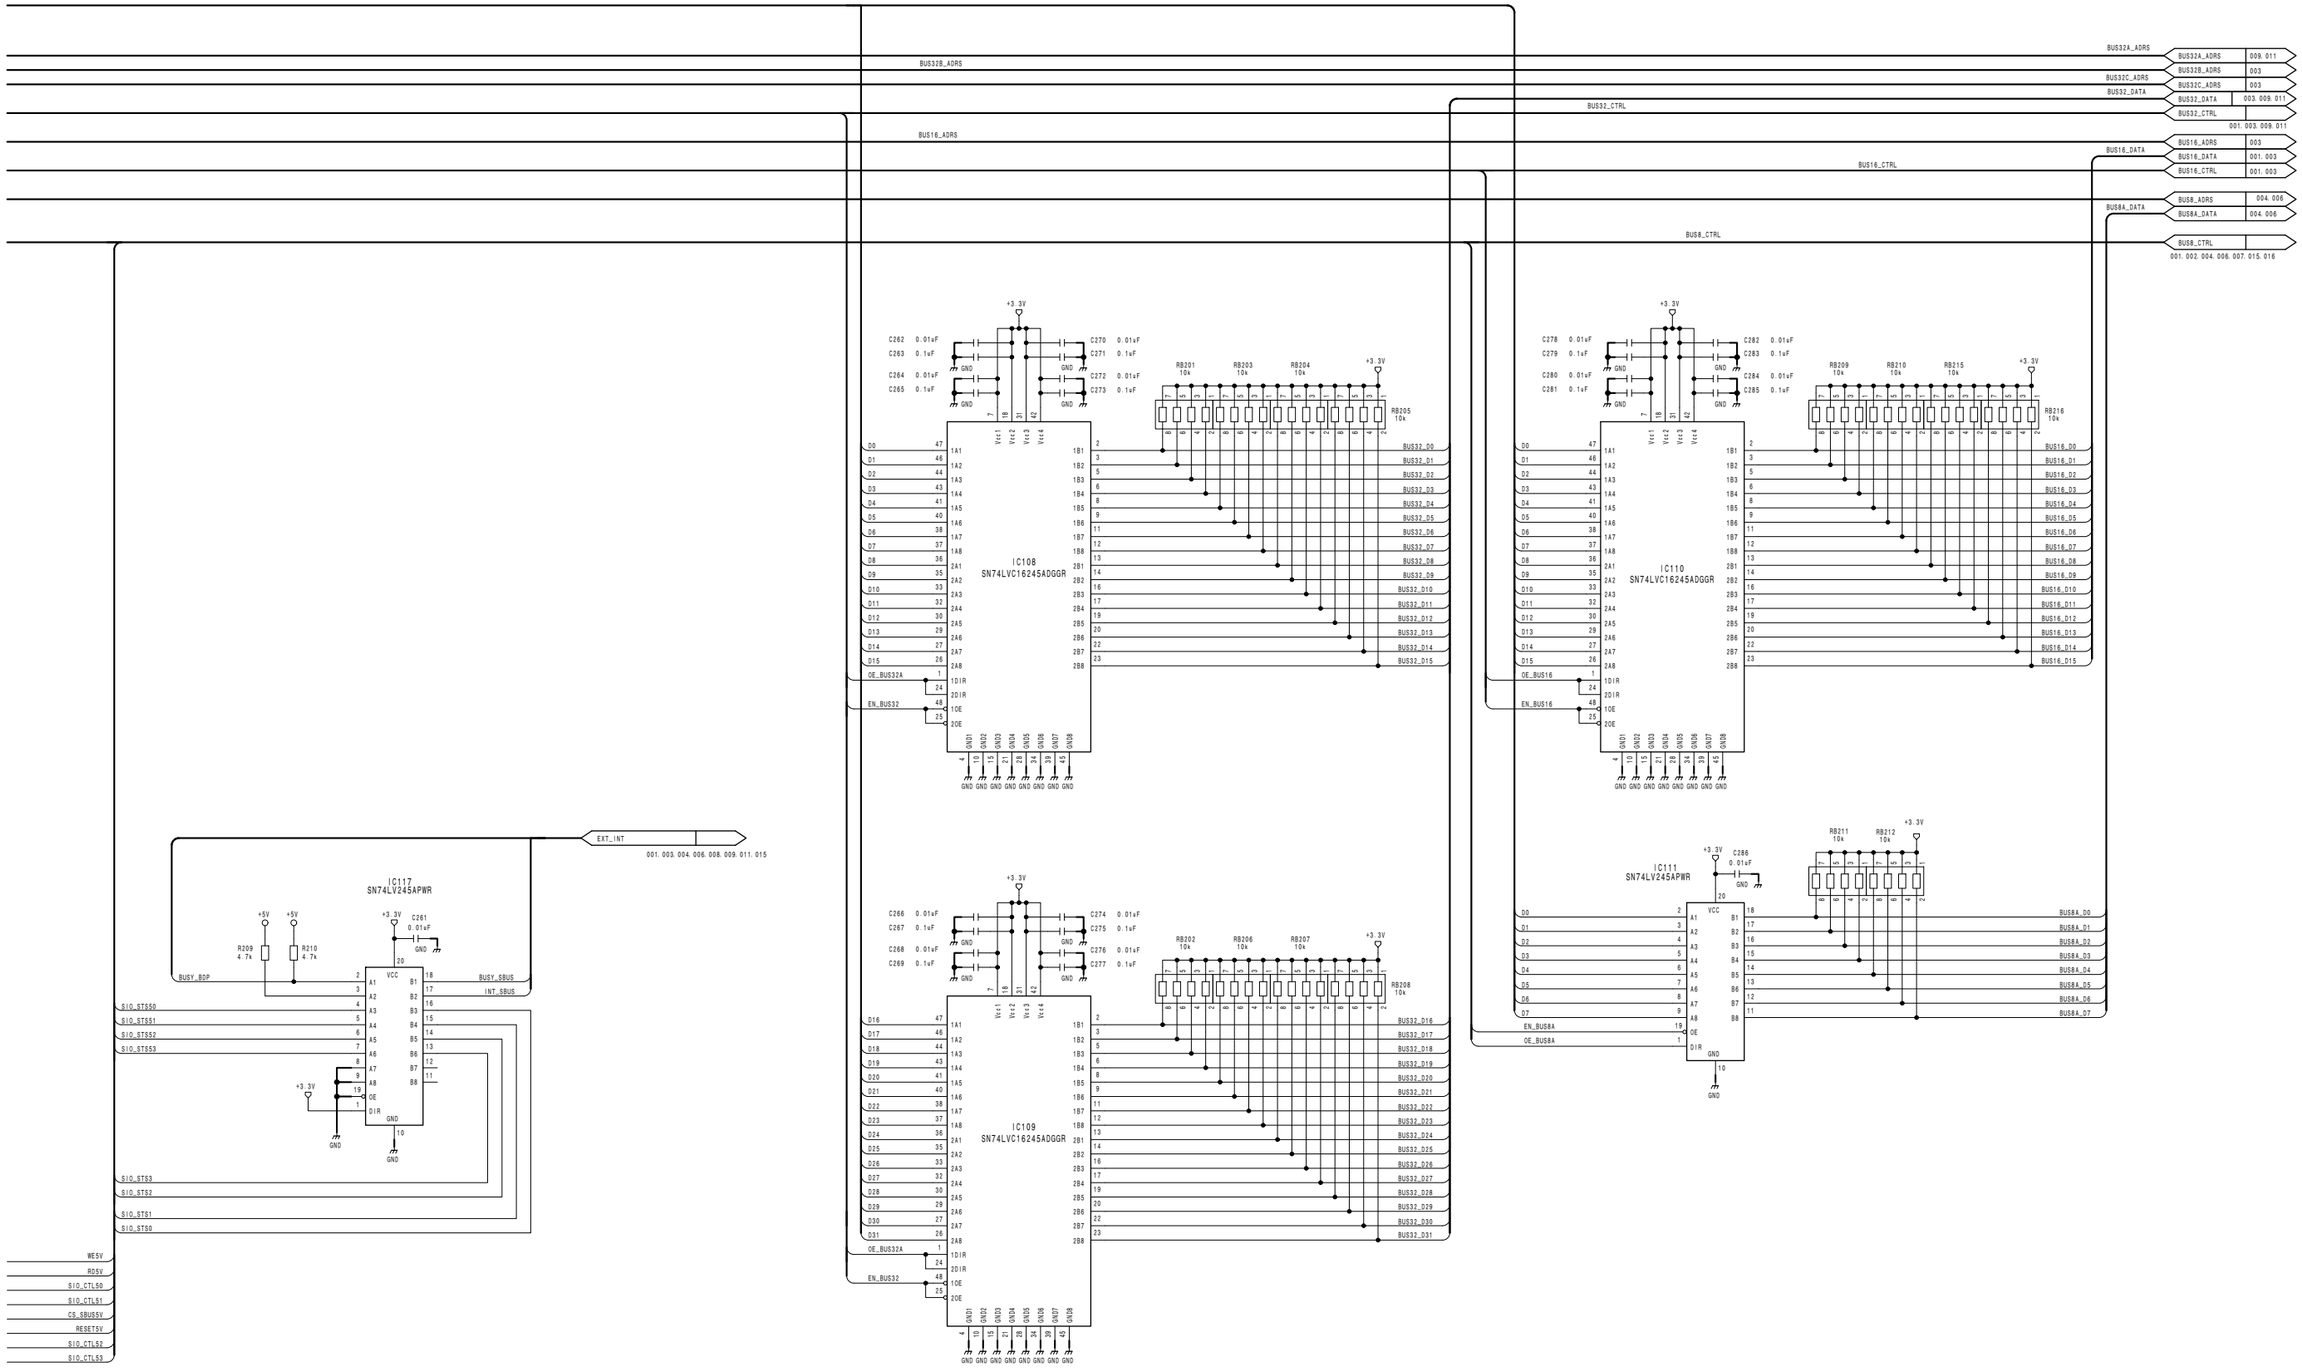


CPU Board
CA-54C (2/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_2

CA-54C (3/17)
SUFFIX: -24

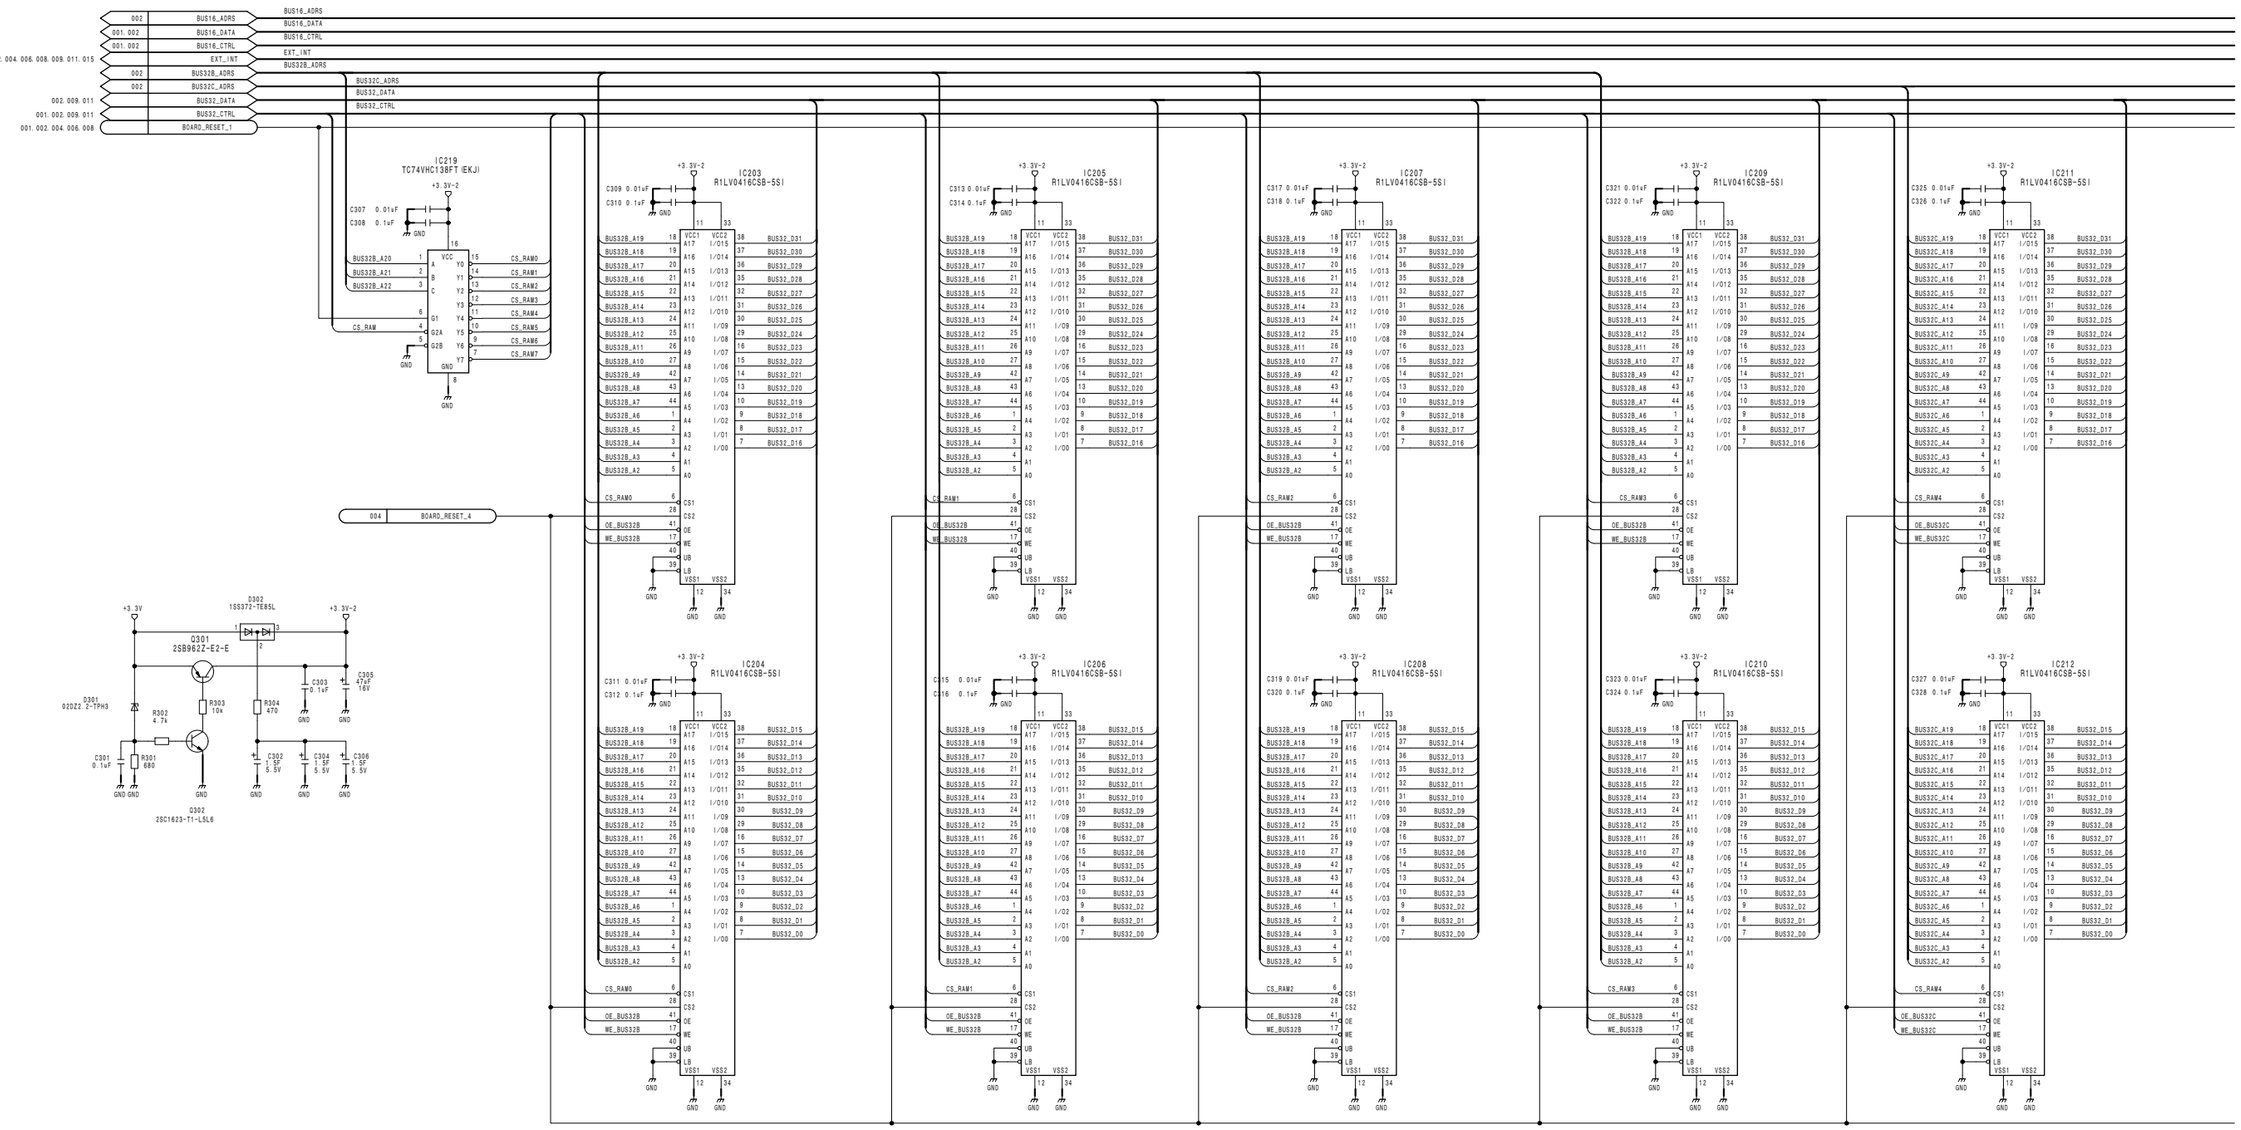



CA-54C (3/17)
SUFFIX: -24

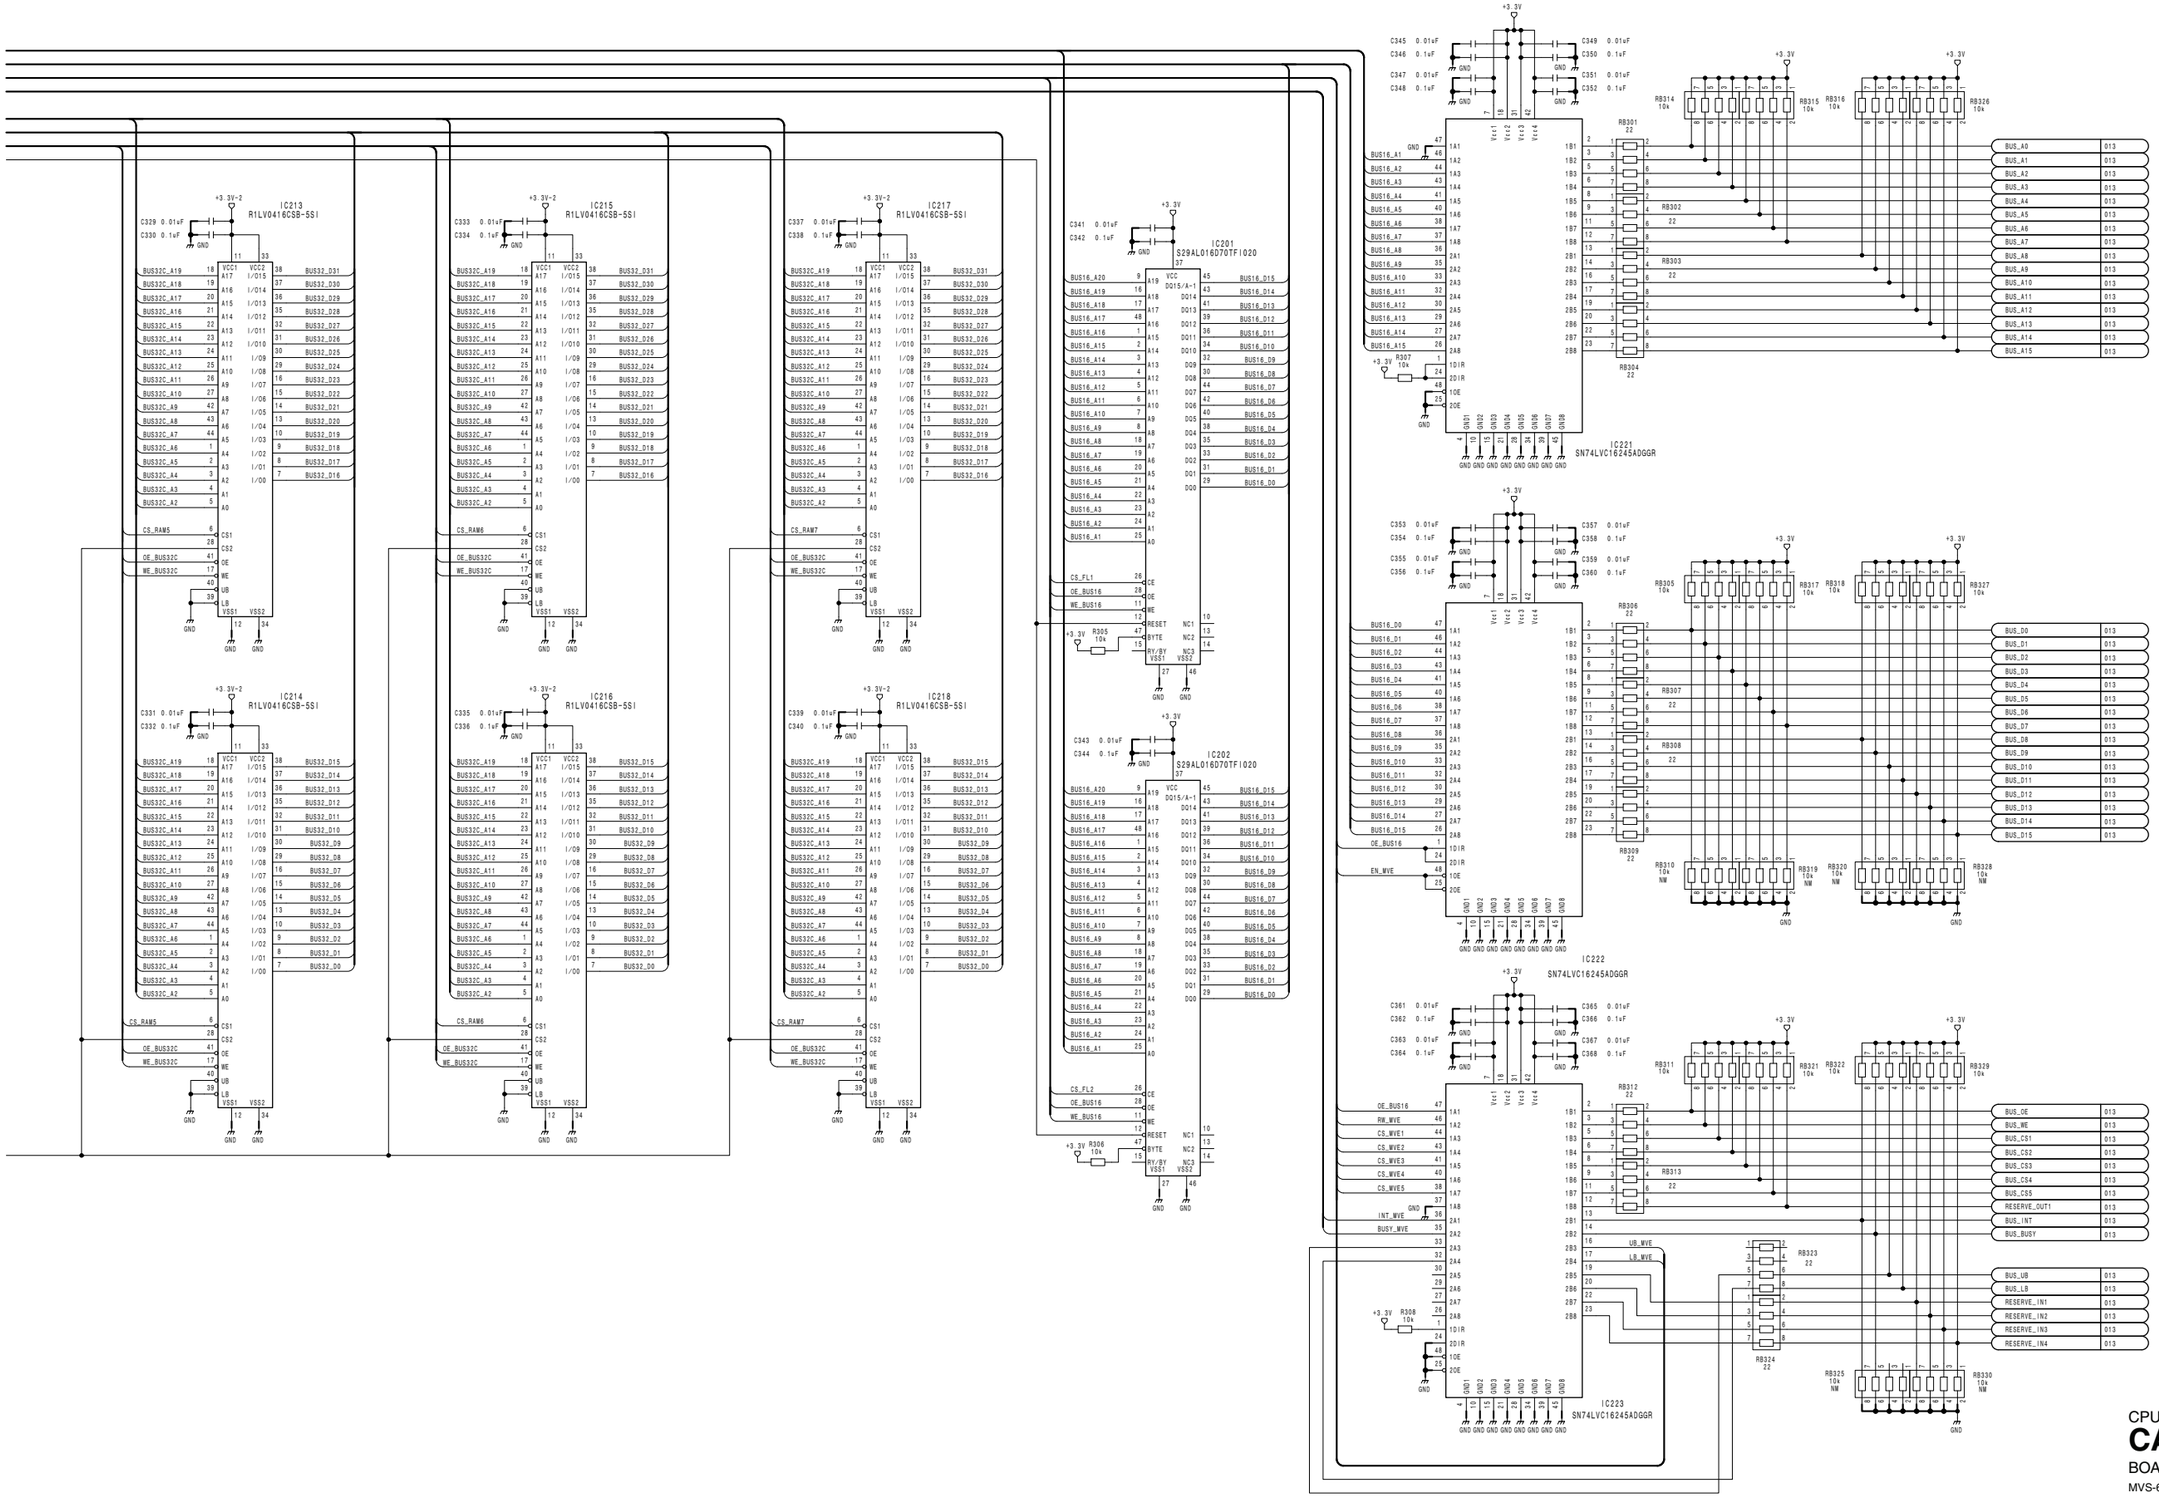


CPU Board
CA-54C (3/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_3

CA-54C (4/17)
SUFFIX: -24

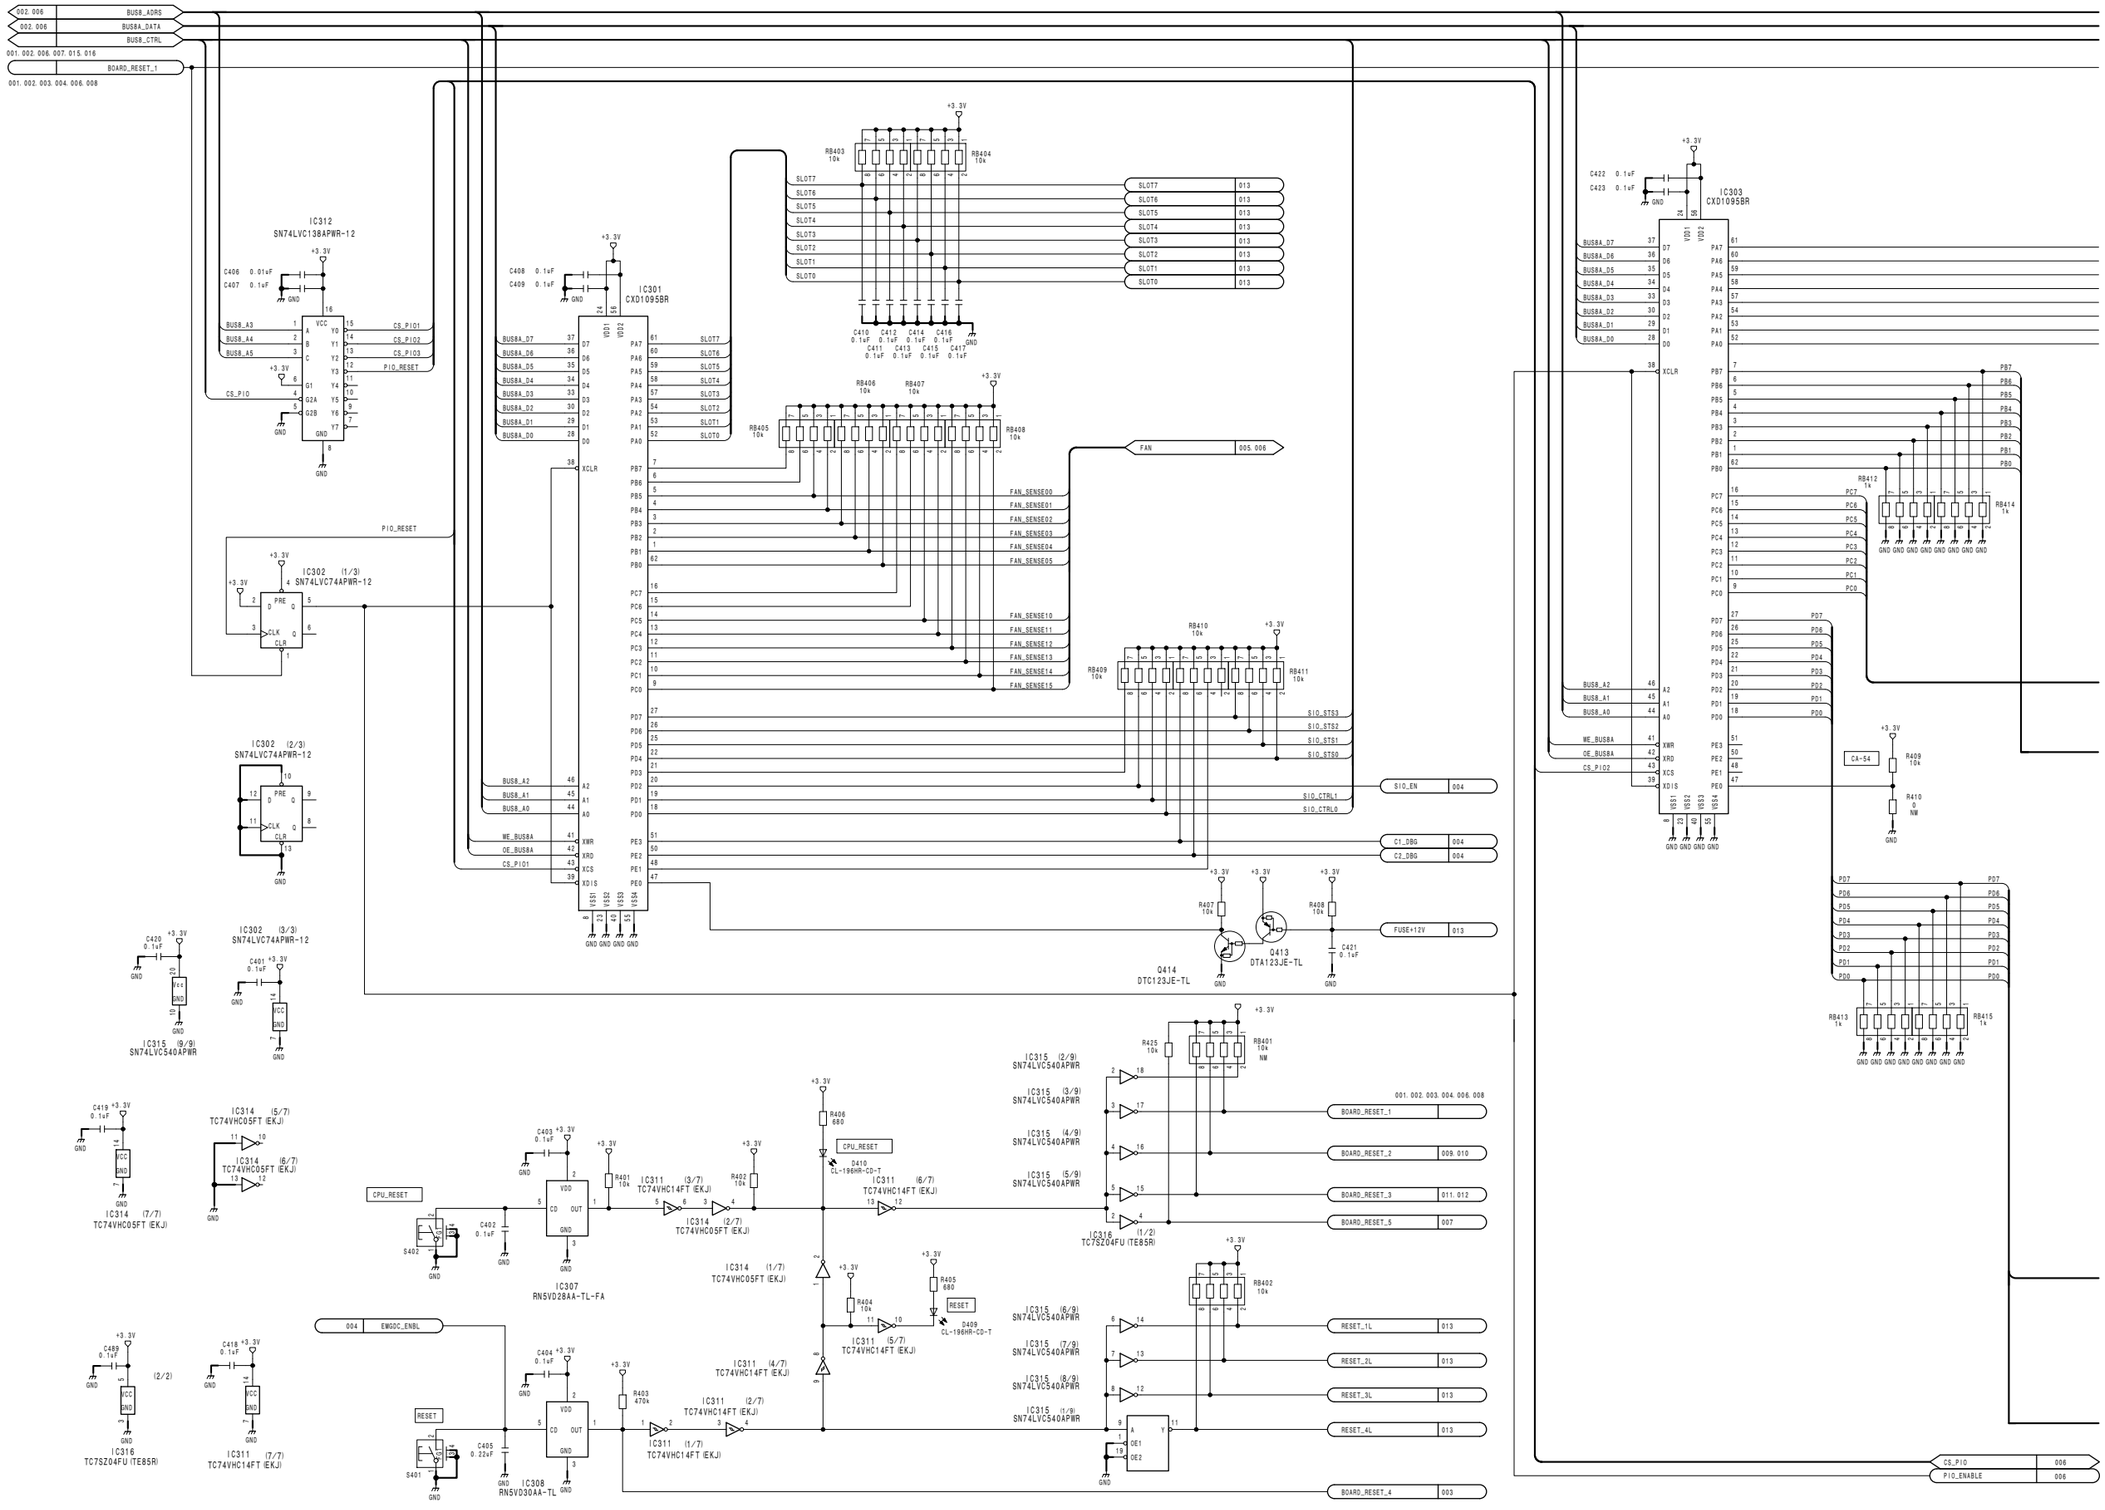

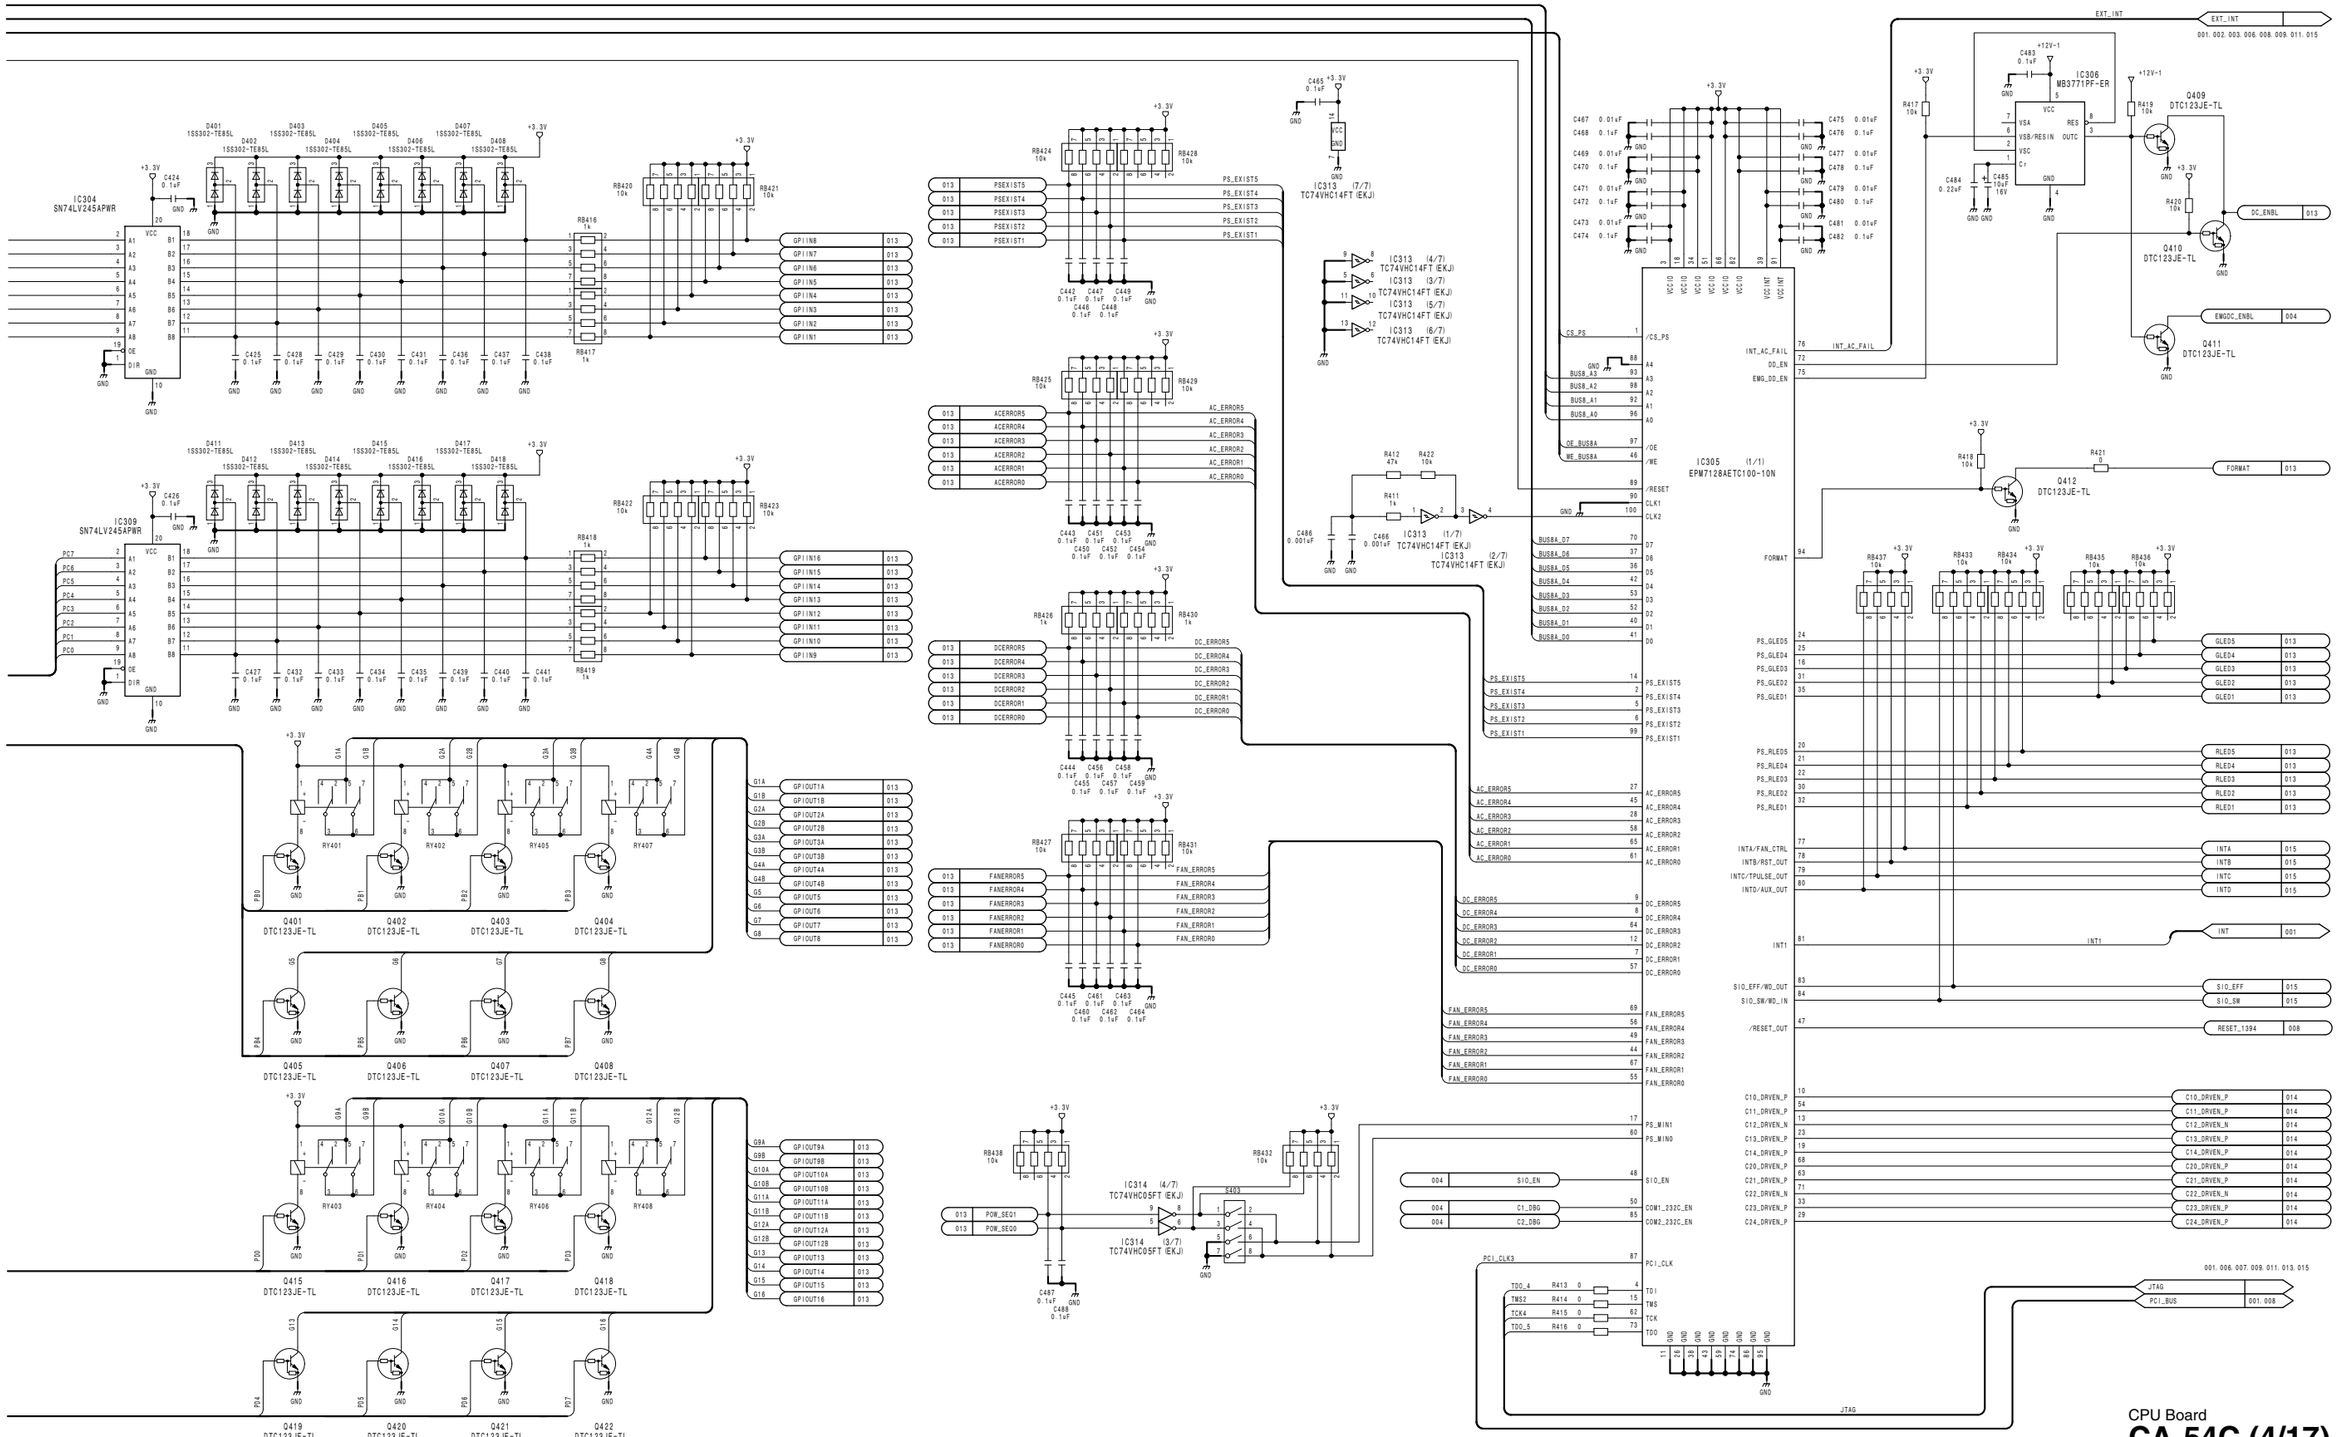

IC304 SN74LV245APWR
IC309 SN74LV245APWR
IC313 (7/7) TC74VHC14FT (EKJ)
IC313 (4/7) TC74VHC14FT (EKJ)
IC313 (3/7) TC74VHC14FT (EKJ)
IC313 (5/7) TC74VHC14FT (EKJ)
IC313 (6/7) TC74VHC14FT (EKJ)
IC313 (1/7) TC74VHC14FT (EKJ)
IC313 (2/7) TC74VHC14FT (EKJ)
IC314 (4/7) TC74VHC05FT (EKJ)
IC314 (3/7) TC74VHC05FT (EKJ)
IC305 (1/1) EPM7128AETC100-10N
IC306 MB3771PF-ER
Q401 DTC123JE-TL
Q402 DTC123JE-TL
Q403 DTC123JE-TL
Q404 DTC123JE-TL
Q405 DTC123JE-TL
Q406 DTC123JE-TL
Q407 DTC123JE-TL
Q408 DTC123JE-TL
Q409 DTC123JE-TL
Q410 DTC123JE-TL
Q411 DTC123JE-TL
Q412 DTC123JE-TL
Q415 DTC123JE-TL
Q416 DTC123JE-TL
Q417 DTC123JE-TL
Q418 DTC123JE-TL
Q419 DTC123JE-TL
Q420 DTC123JE-TL
Q421 DTC123JE-TL
Q422 DTC123JE-TL
RY401
RY402
RY403
RY404
RY405
RY406
RY407
RY408
EXT_INT
001. 002. 003. 006. 008. 009. 011. 015
DC_ENBL
EWDOG_ENBL
FORMAT
INT_AC_FAIL
INT1
JTAG
PCI_BUS
CPU Board
CA-54C (4/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_4

CA-54C (5/17)
SUFFIX: -24

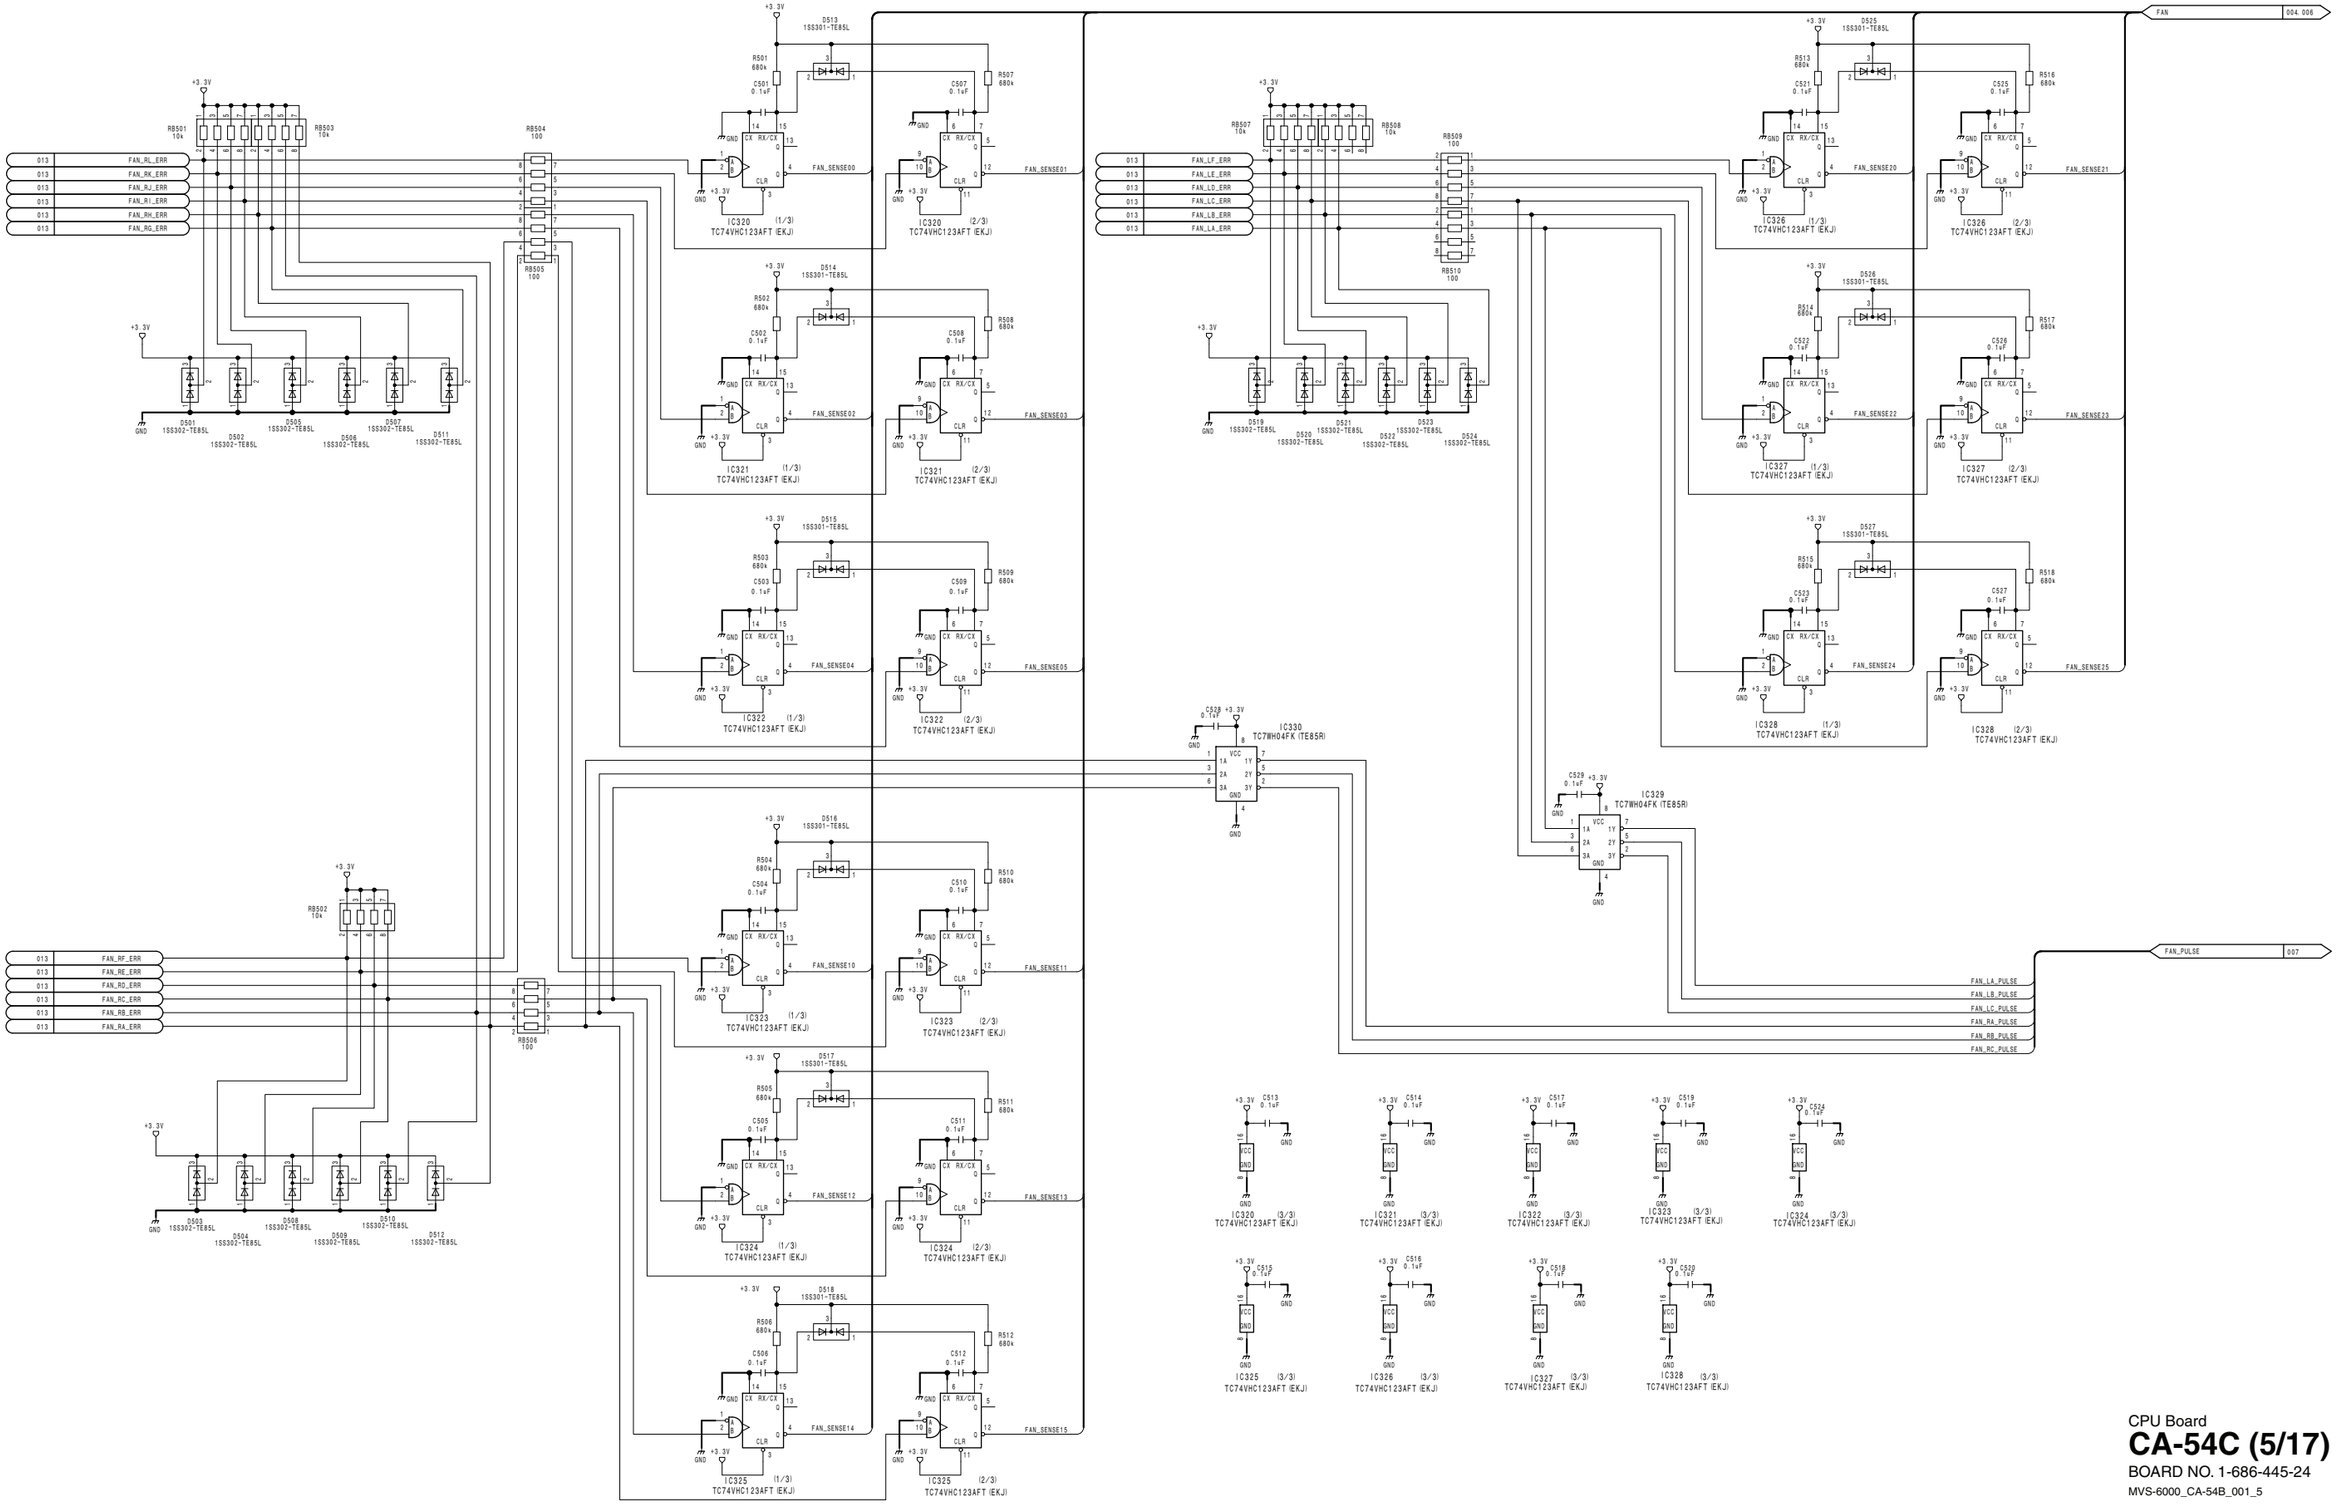


CPU Board
CA-54C (5/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_5

CA-54C (6/17)
SUFFIX: -24

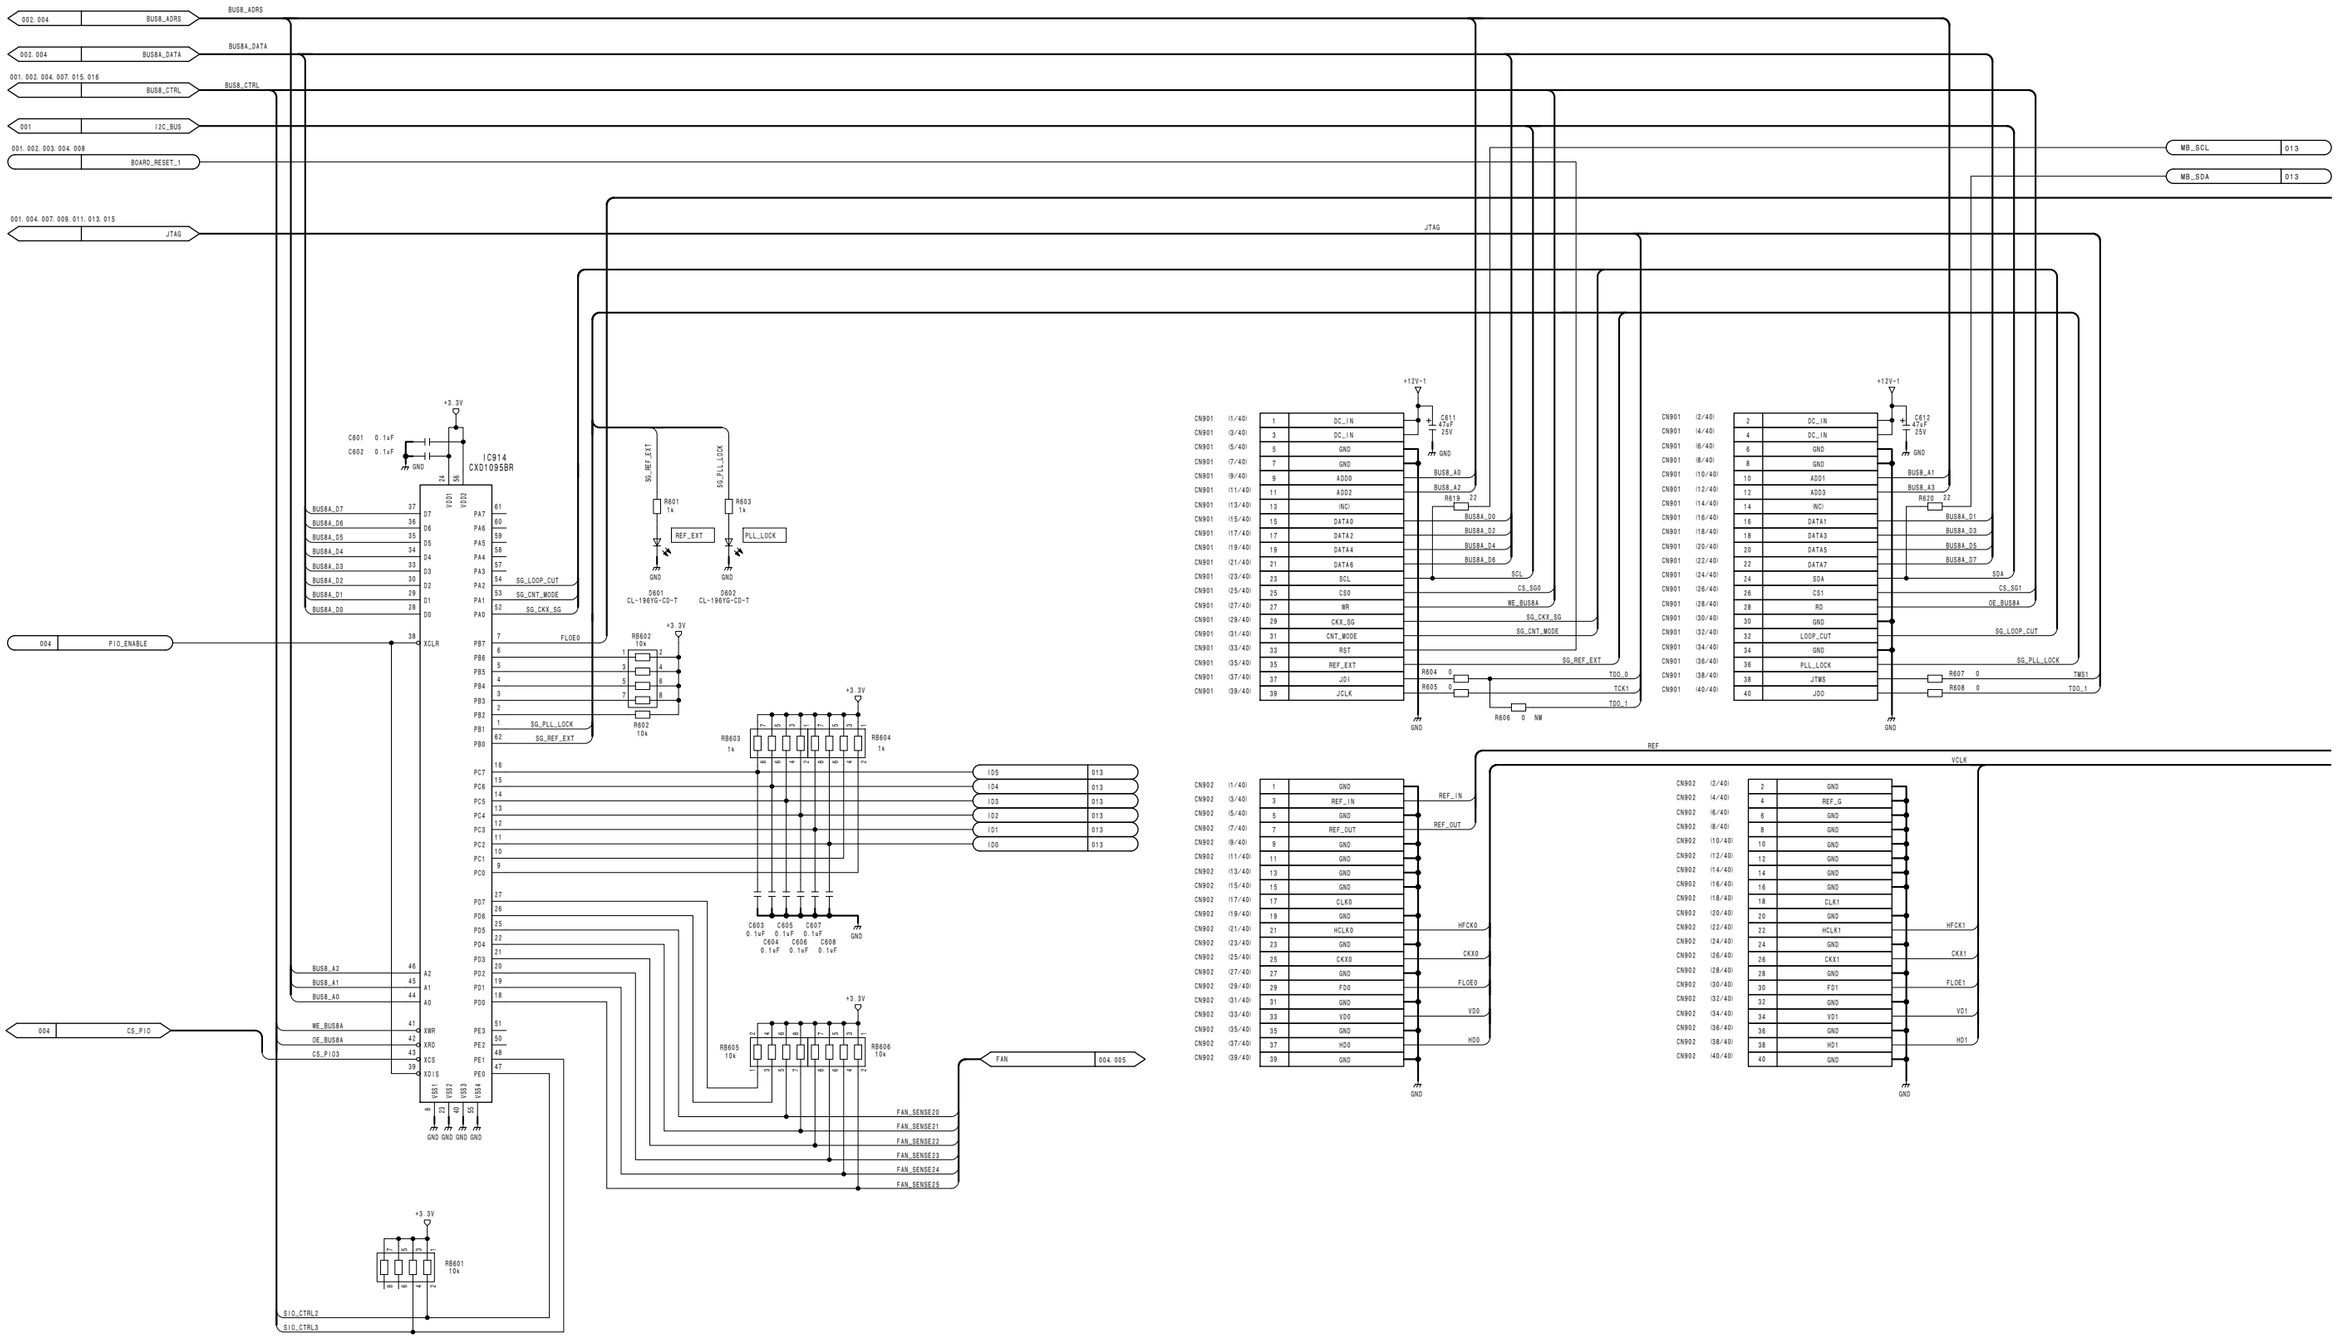


CA-54C (6/17)
SUFFIX: -24

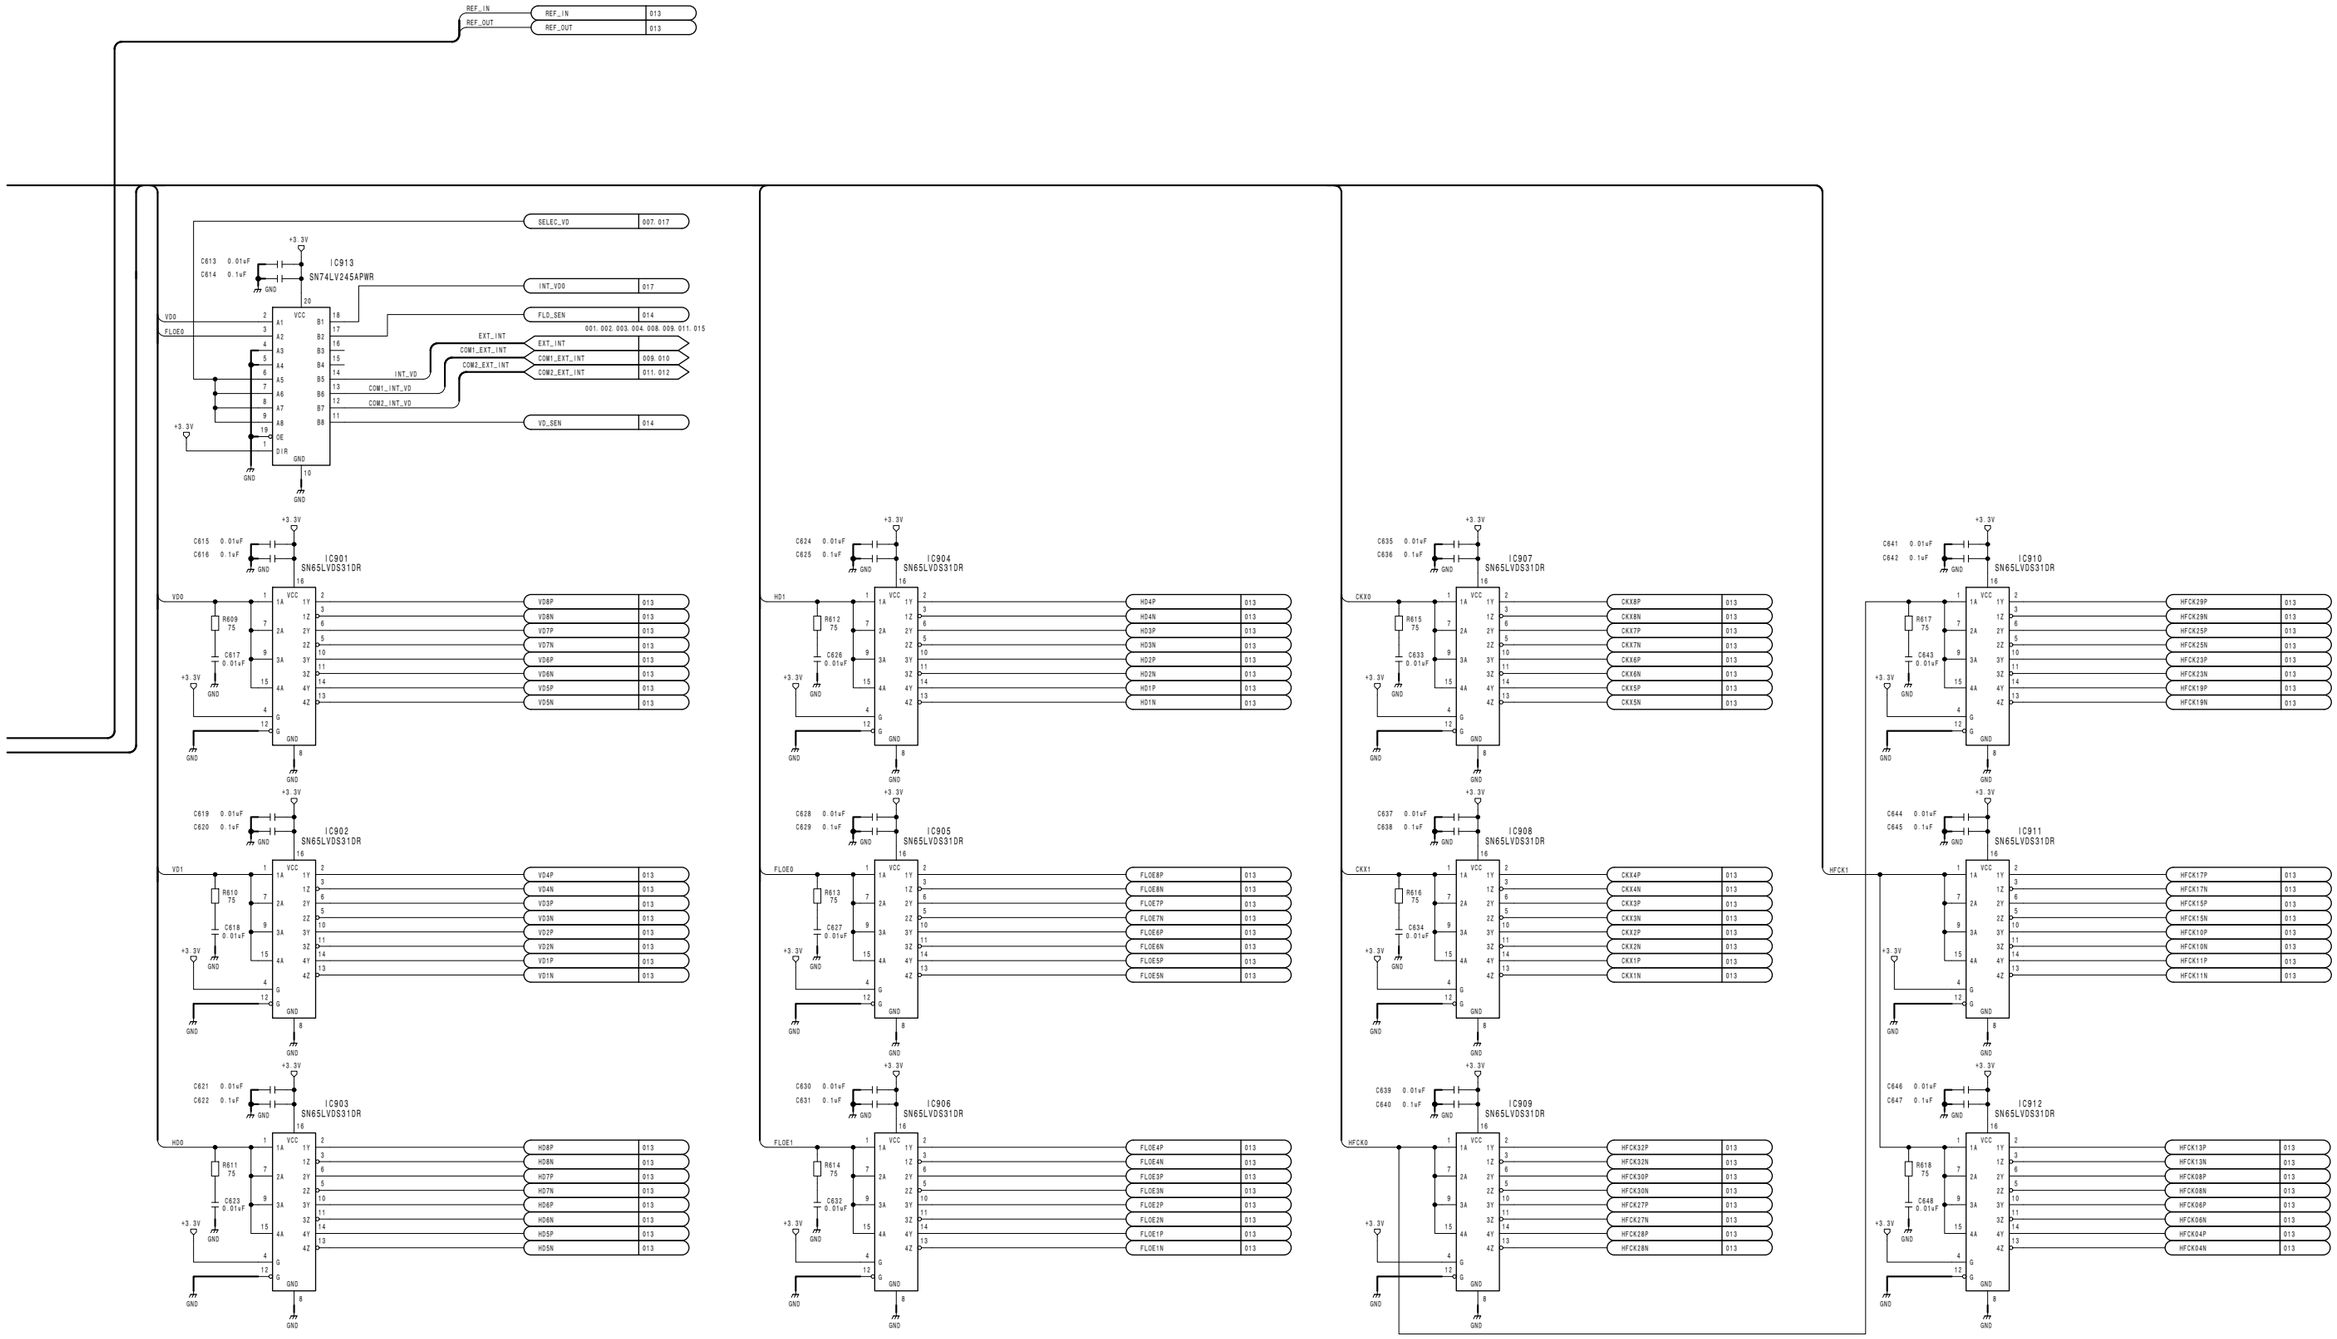


CPU Board
CA-54C (6/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_6

CA-54C (7/17) **SUFFIX: -24**

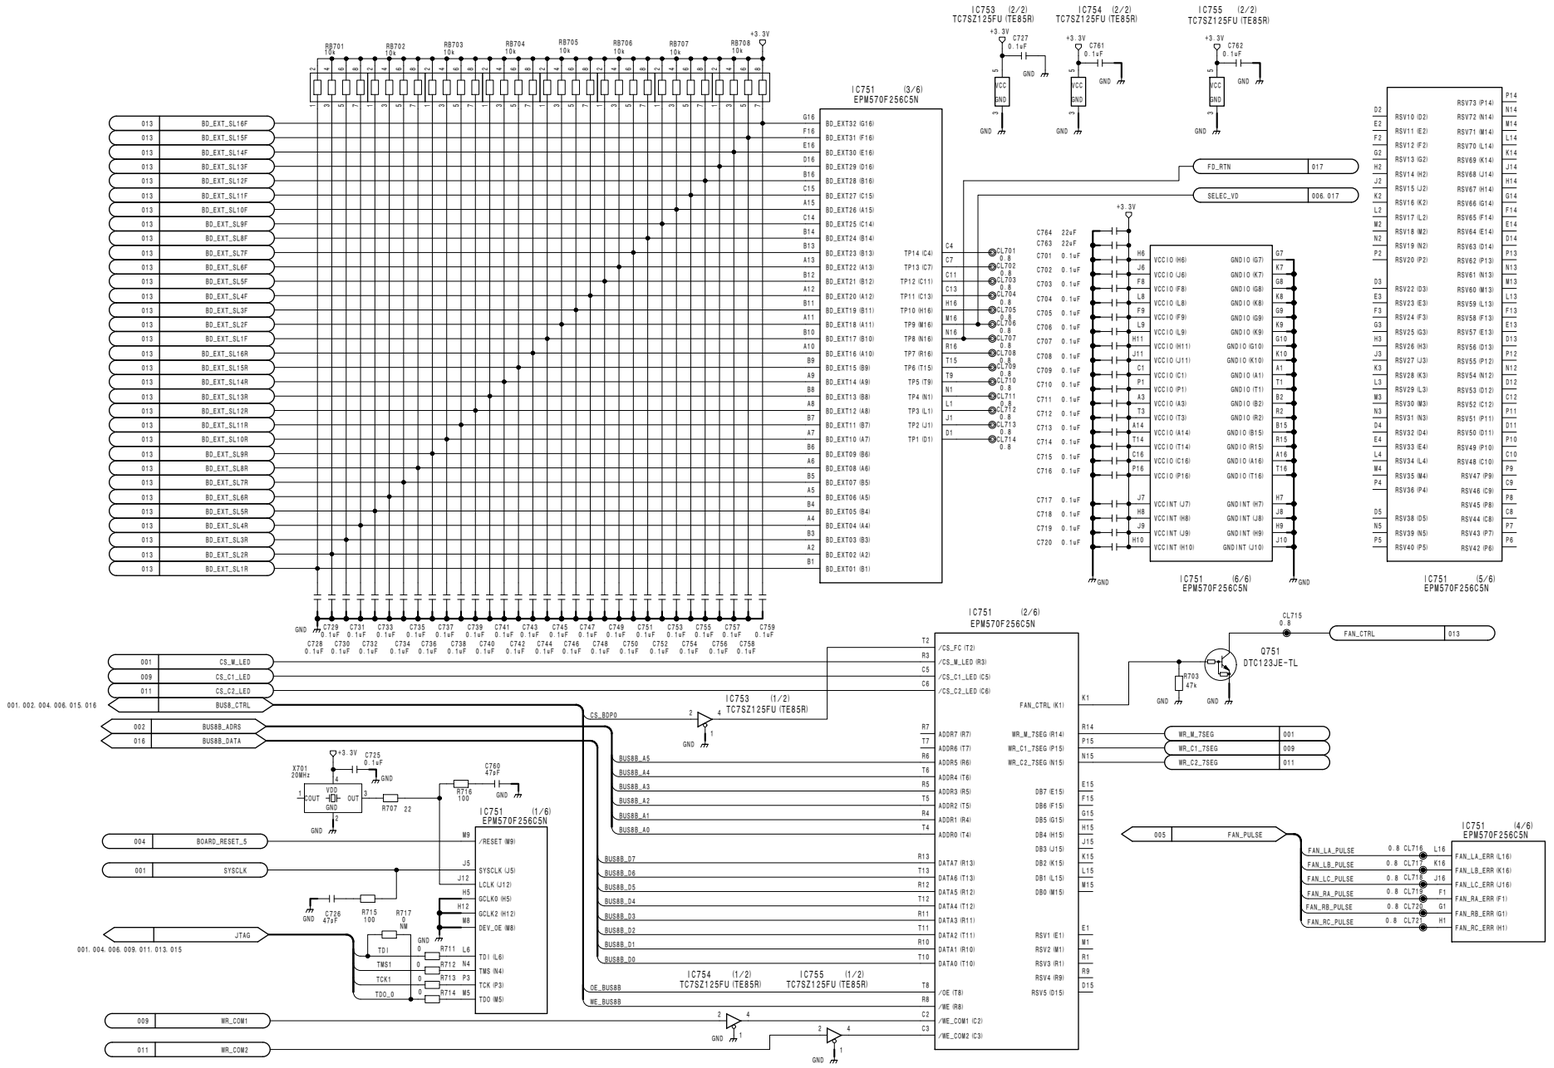


CPU Board
CA-54C (7/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_7


CA-54C (8/17)
SUFFIX: -24

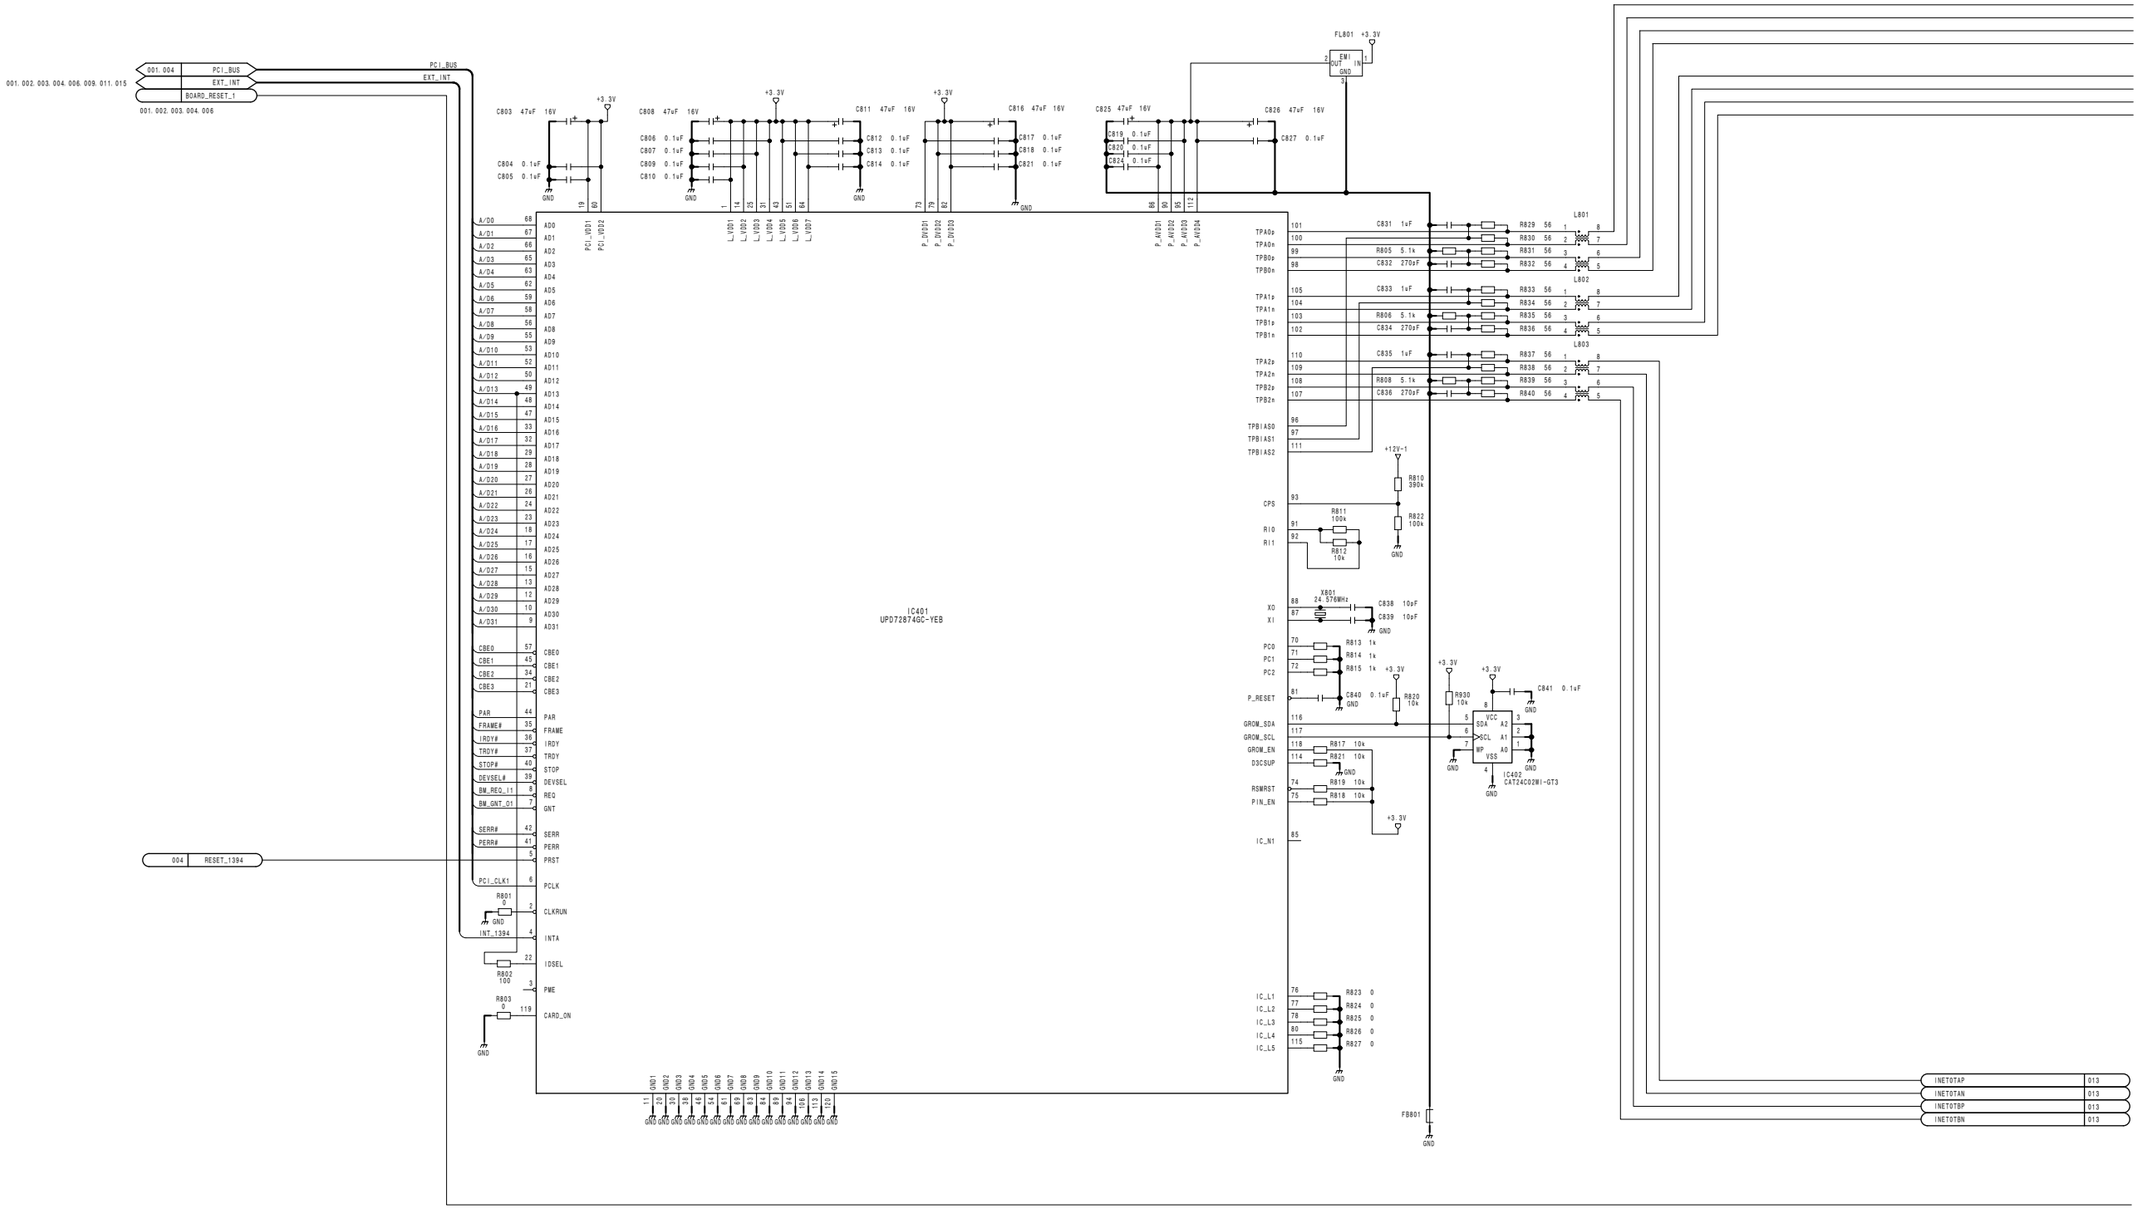

4-16

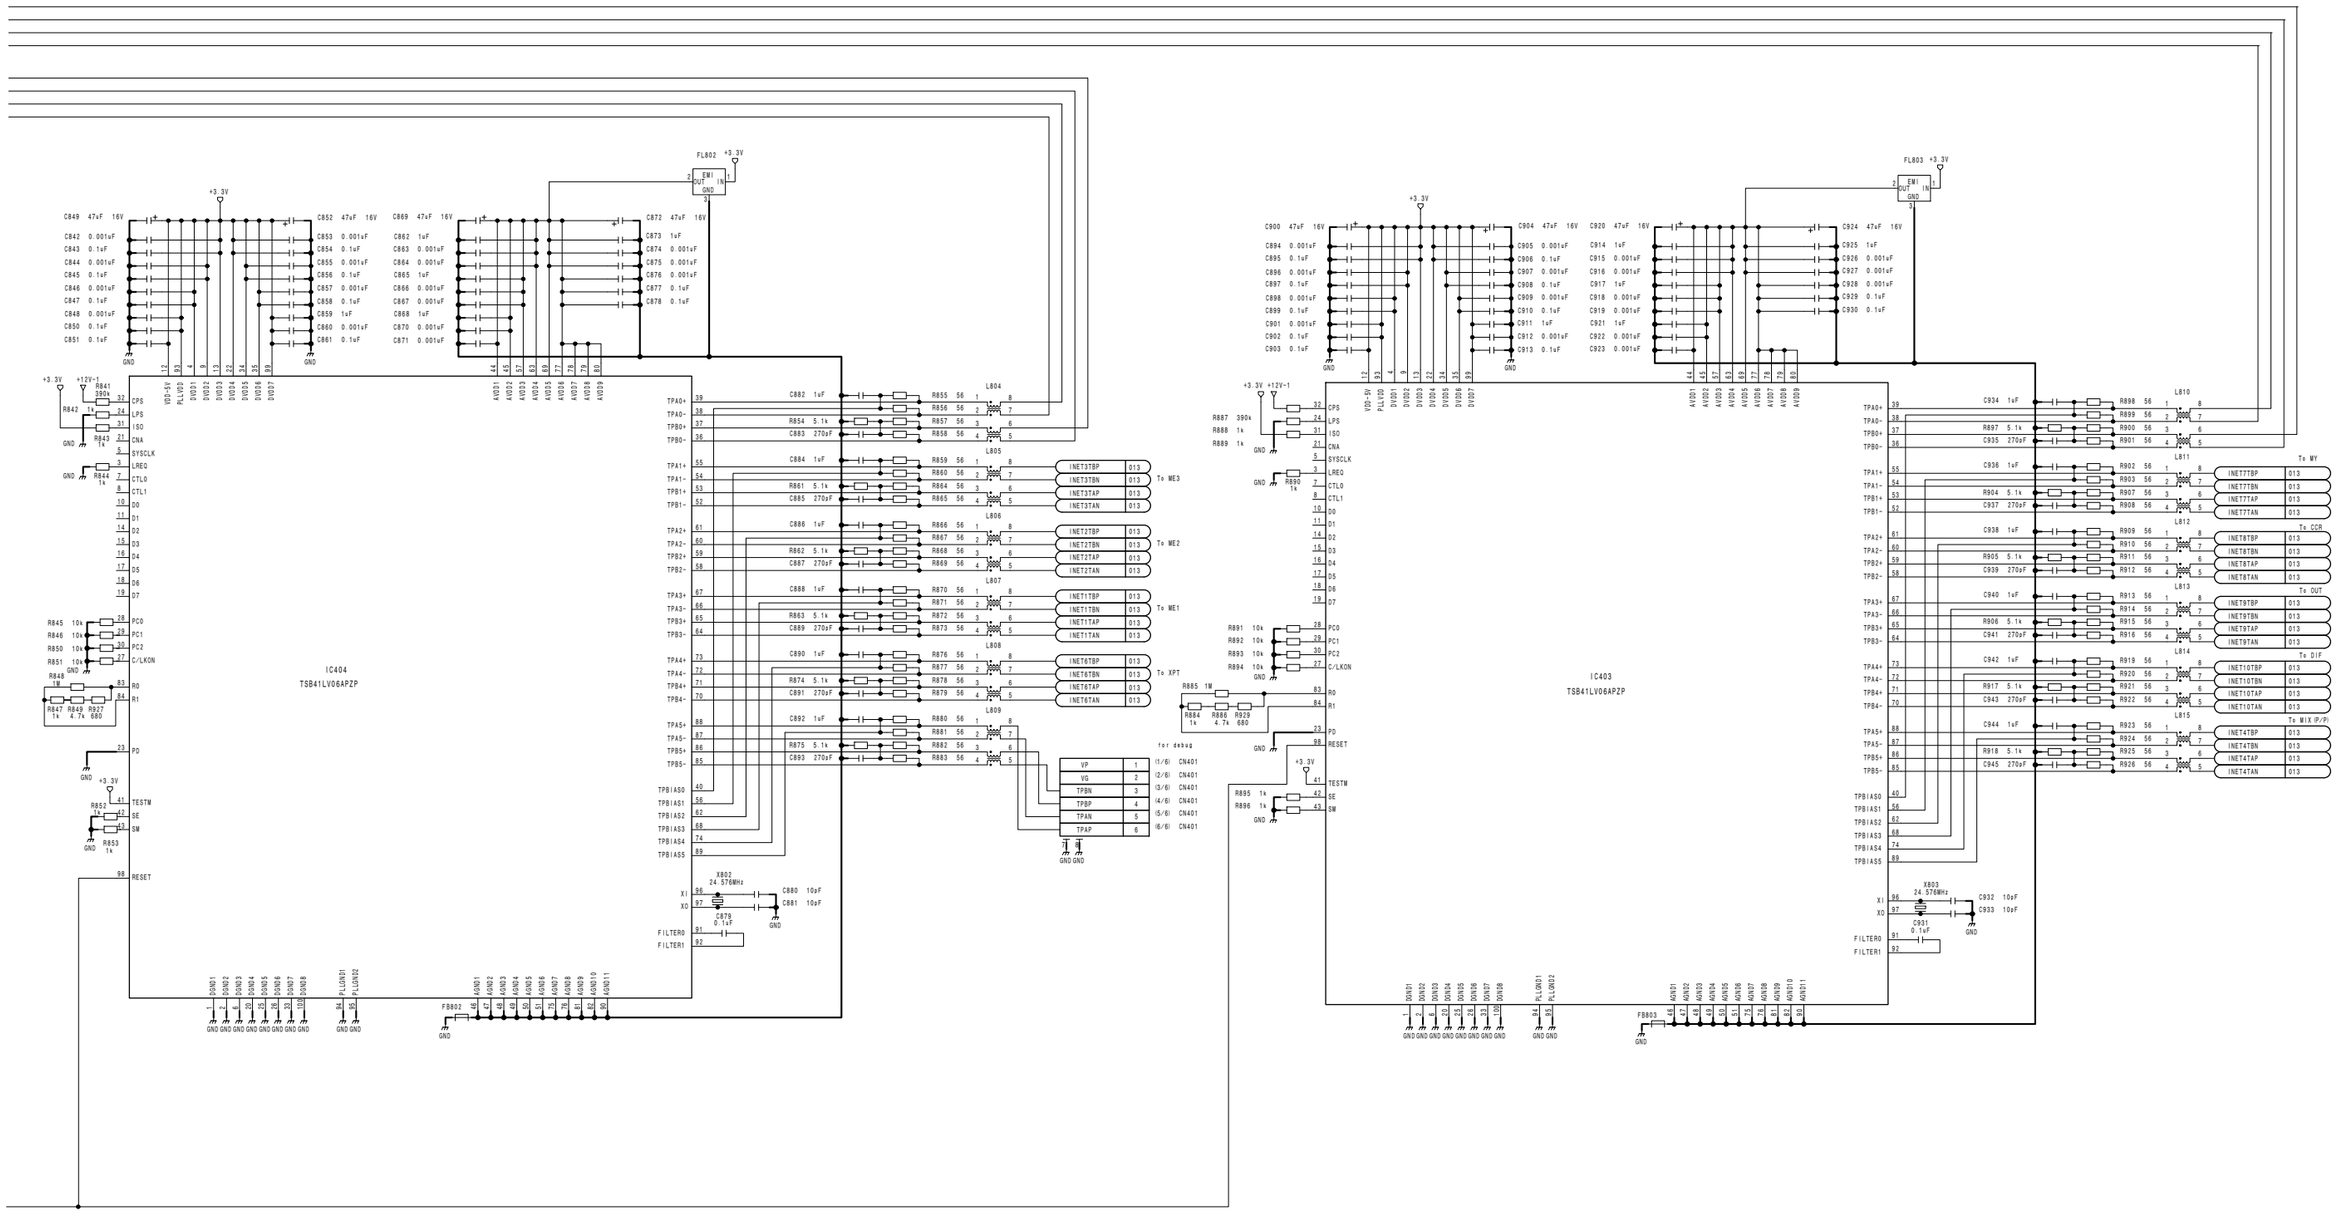

IC404
TSB41LV06APZP
IC403
TSB41LV06APZP
X802 24.576MHz
X803 24.576MHz
FL802
FL803
L804
L805
L806
L807
L808
L809
L810
L811
L812
L813
L814
L815
To ME3
To ME2
To ME1
To XPT
To MY
To CCR
To OUT
To DIF
To MIX (P/P)
for debug
CN401

CA-54C (9/17)
SUFFIX: -24

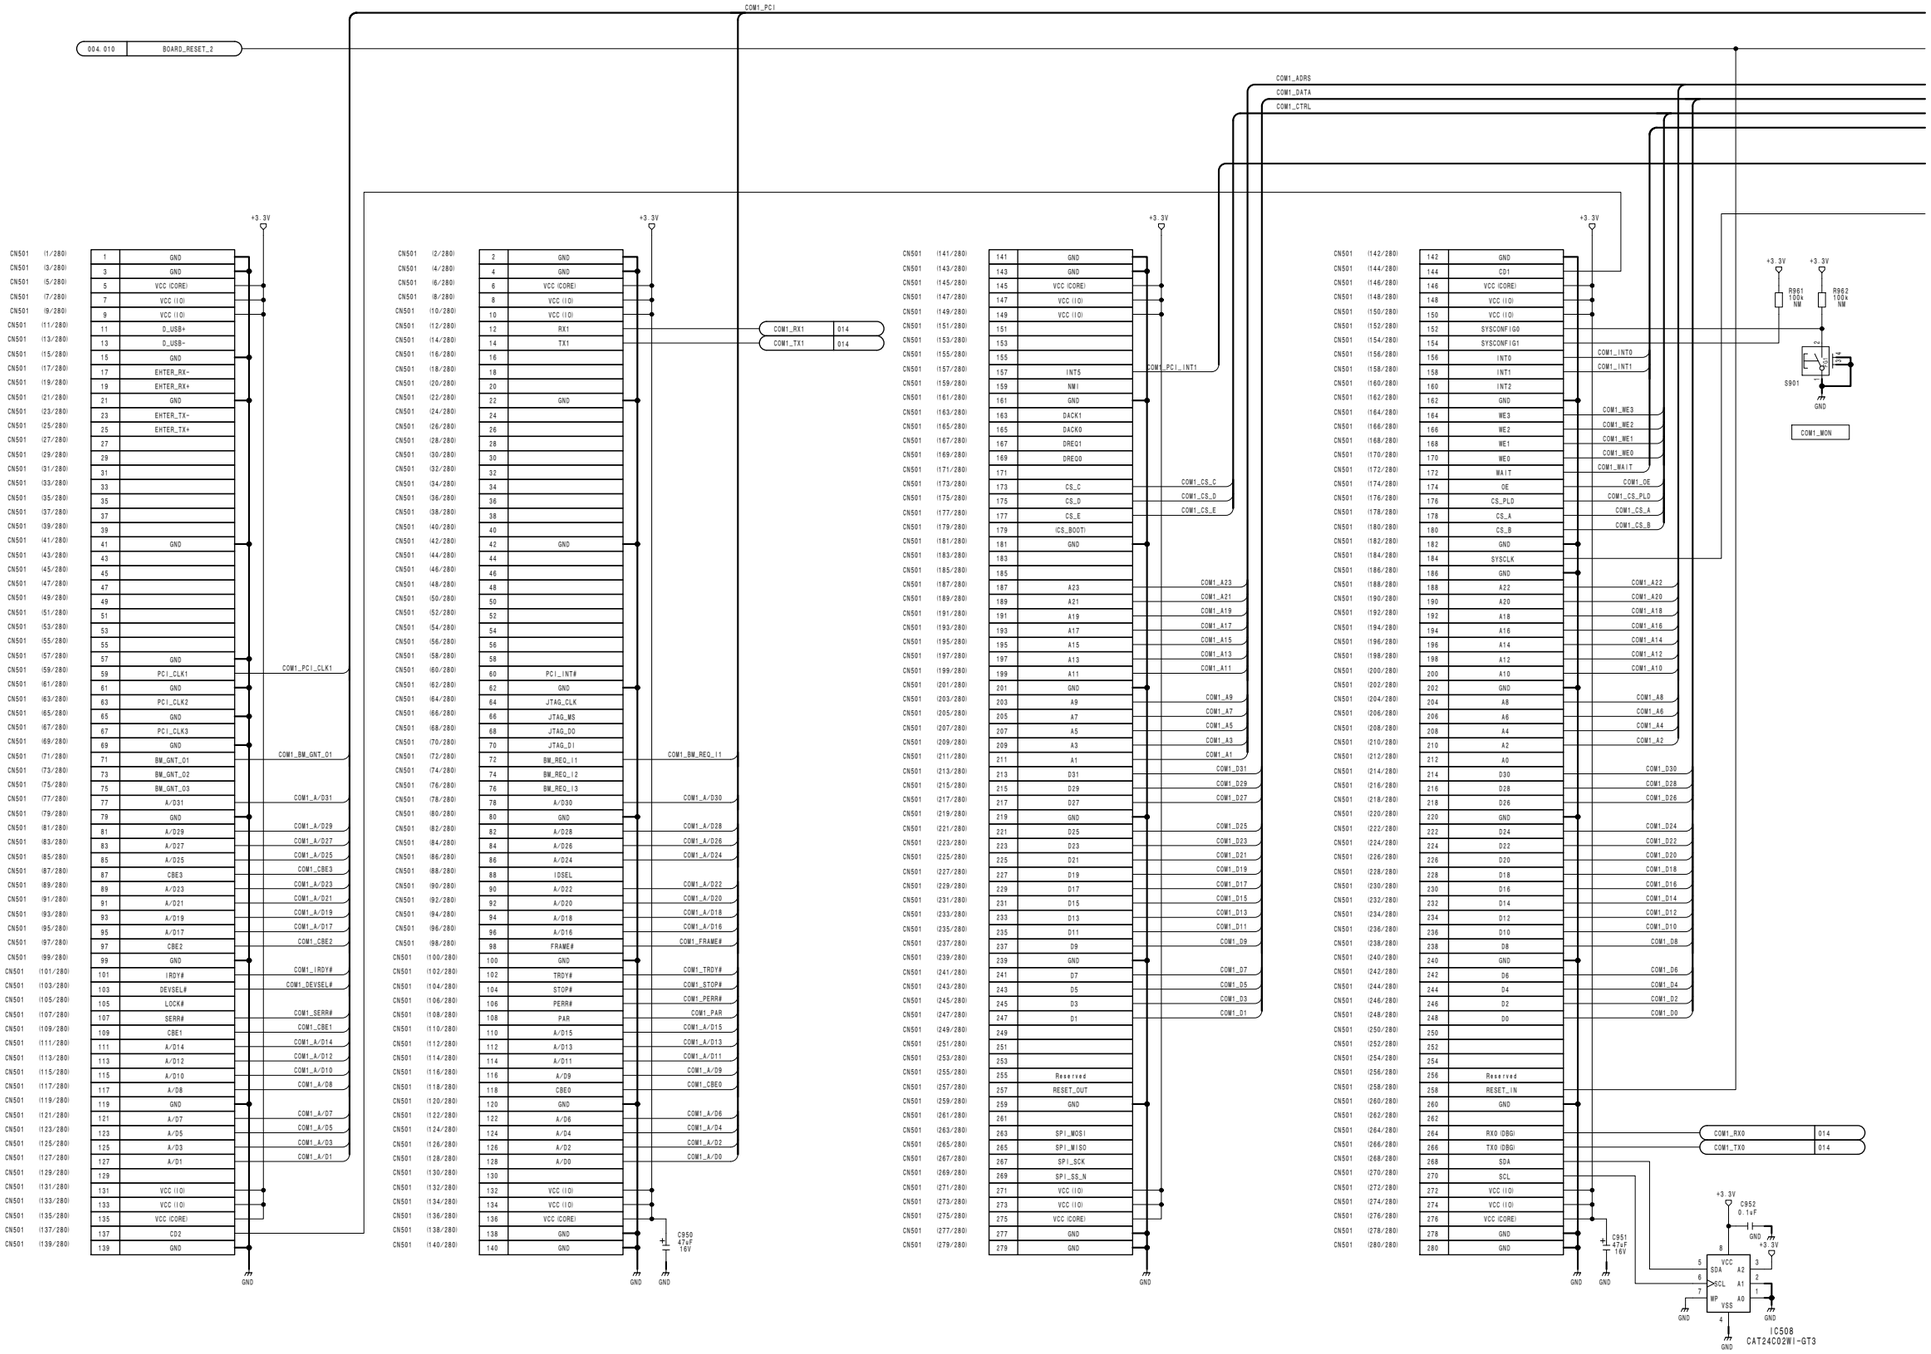


4-18

CA-54C (9/17)
SUFFIX: -24

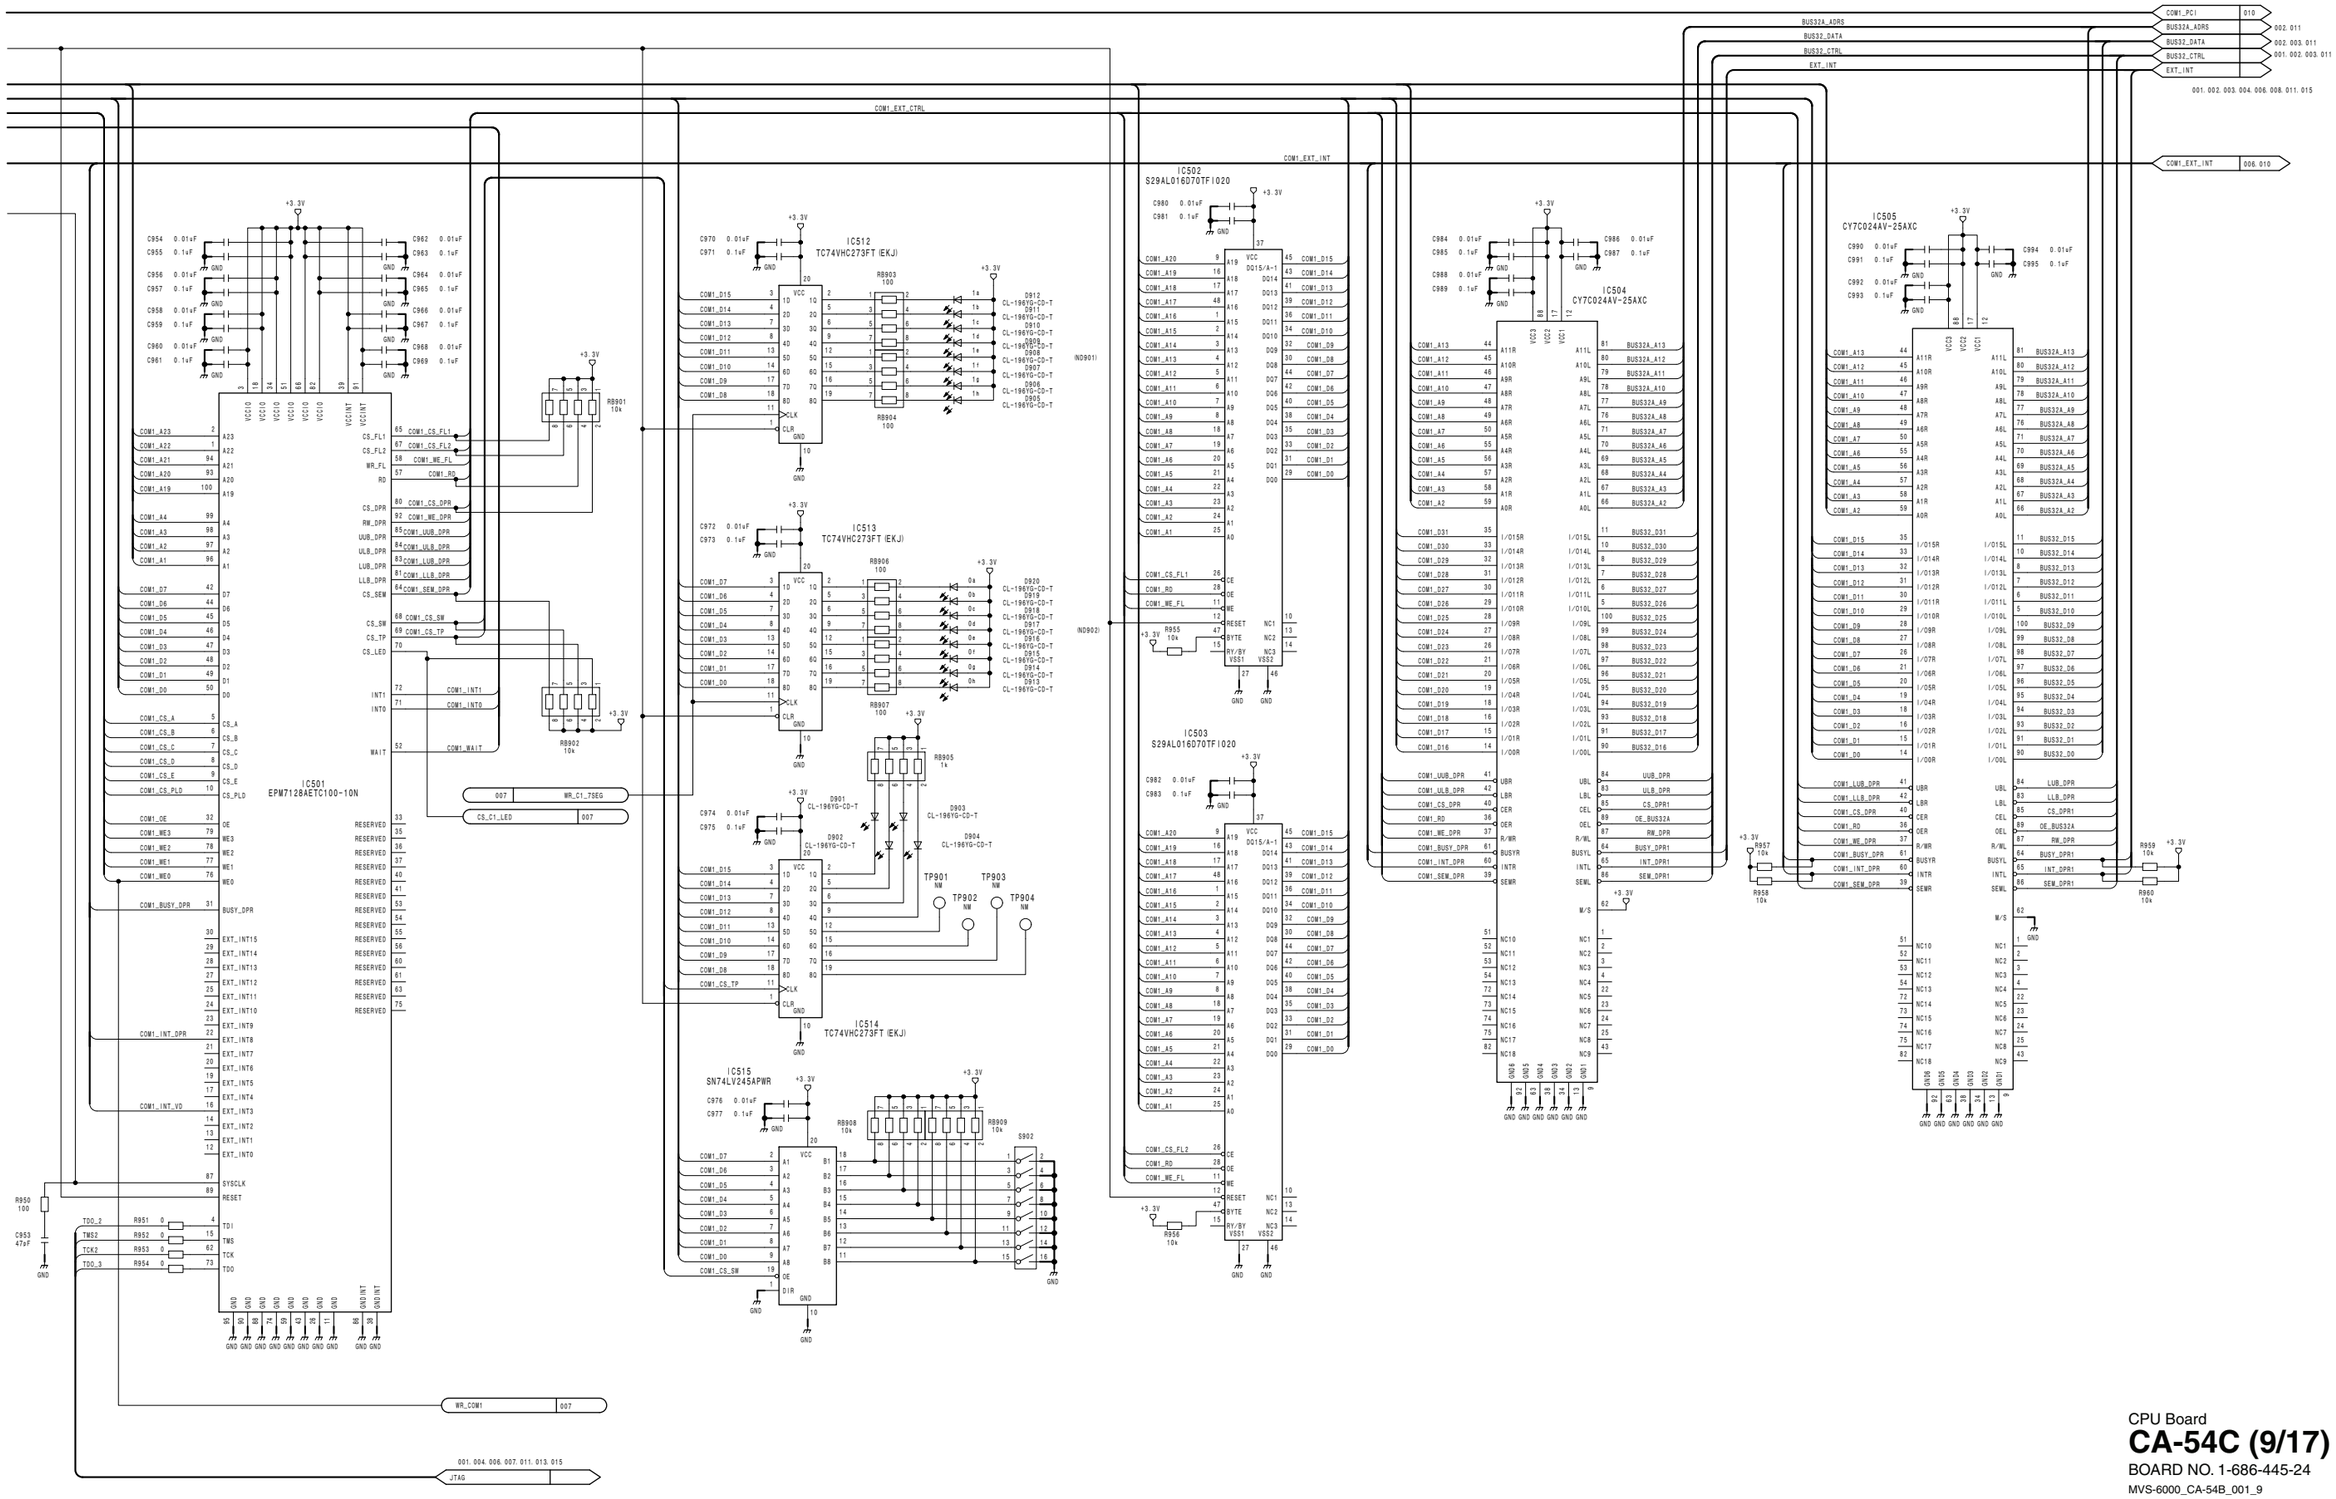



CPU Board
CA-54C (9/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_9

CA-54C (10/17) **SUFFIX: -24**

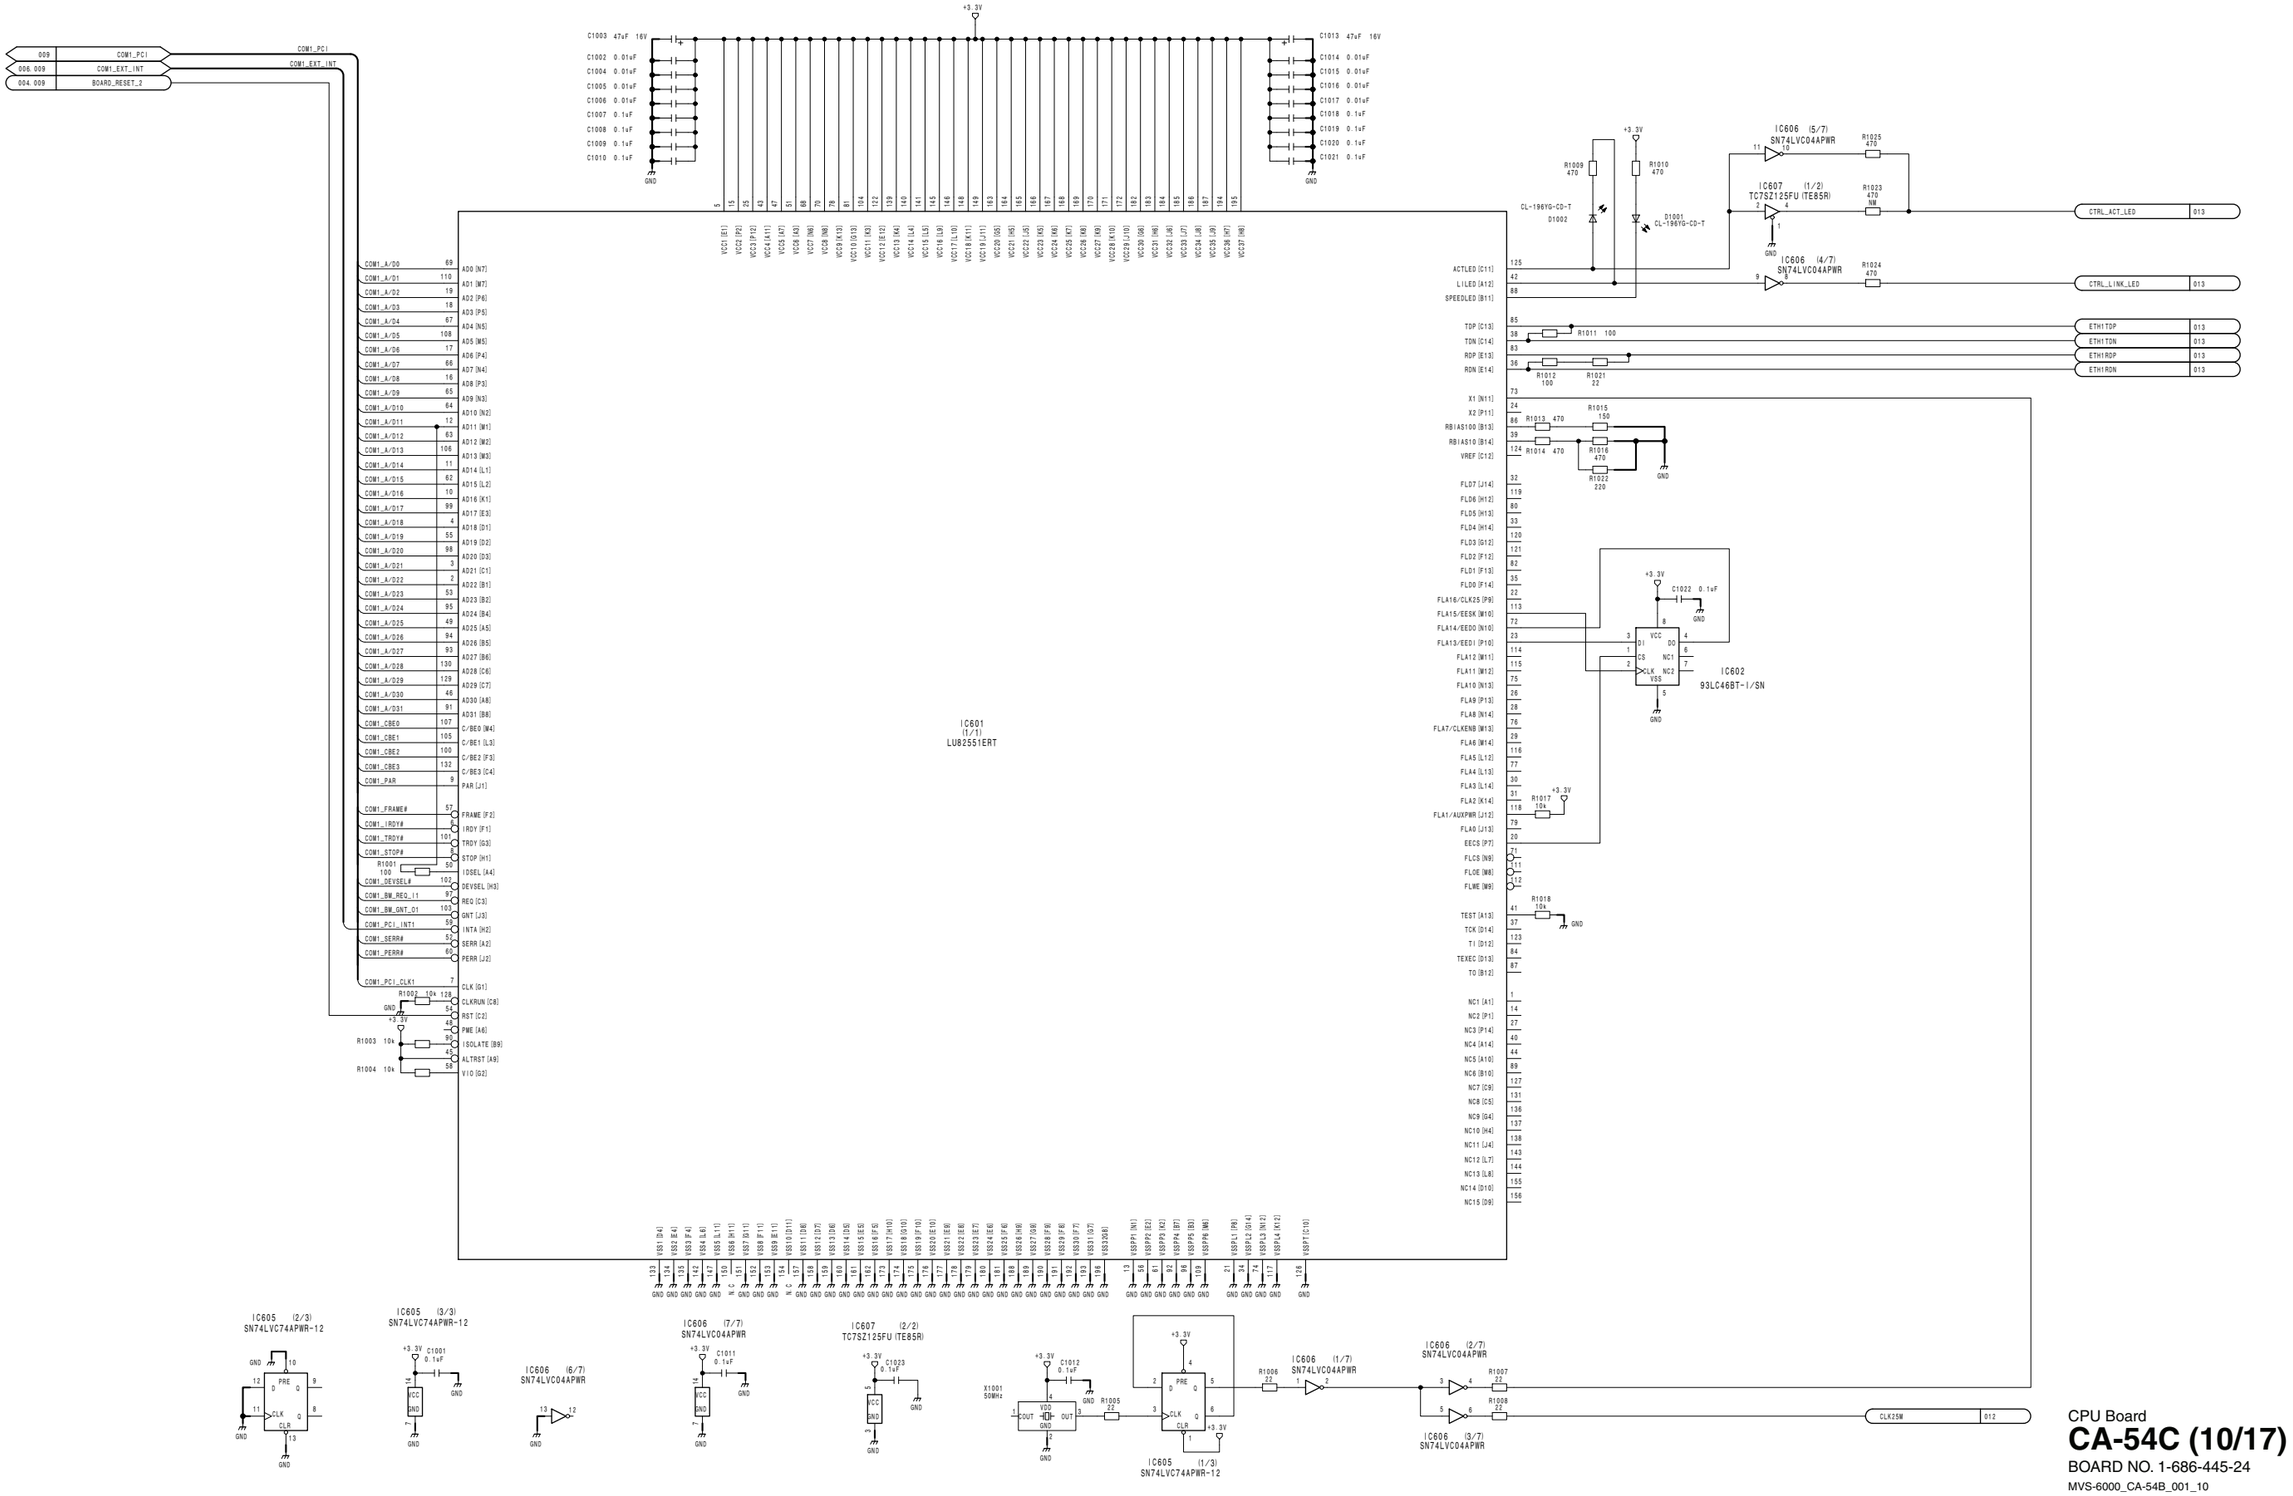

009 COM1_PCI
006, 009 COM1_EXT_INT
004, 009 BOARD_RESET_2
COM1_PCI
COM1_EXT_INT
+3.3V
C1003 47uF 16V
C1002 0.01uF
C1004 0.01uF
C1005 0.01uF
C1006 0.01uF
C1007 0.1uF
C1008 0.1uF
C1009 0.1uF
C1010 0.1uF
C1013 47uF 16V
C1014 0.01uF
C1015 0.01uF
C1016 0.01uF
C1017 0.01uF
C1018 0.1uF
C1019 0.1uF
C1020 0.1uF
C1021 0.1uF
GND
IC601
(1/1)
LU82551ERT
COM1_A/D0 69 AD0 [N7]
COM1_A/D1 110 AD1 [N7]
COM1_A/D2 19 AD2 [P6]
COM1_A/D3 18 AD3 [P5]
COM1_A/D4 67 AD4 [N5]
COM1_A/D5 108 AD5 [M5]
COM1_A/D6 17 AD6 [P4]
COM1_A/D7 66 AD7 [N4]
COM1_A/D8 16 AD8 [P3]
COM1_A/D9 65 AD9 [N3]
COM1_A/D10 64 AD10 [N2]
COM1_A/D11 12 AD11 [M1]
COM1_A/D12 63 AD12 [M2]
COM1_A/D13 106 AD13 [M3]
COM1_A/D14 11 AD14 [L1]
COM1_A/D15 62 AD15 [L2]
COM1_A/D16 10 AD16 [K1]
COM1_A/D17 99 AD17 [E3]
COM1_A/D18 4 AD18 [D1]
COM1_A/D19 55 AD19 [D2]
COM1_A/D20 98 AD20 [D3]
COM1_A/D21 3 AD21 [C1]
COM1_A/D22 2 AD22 [B1]
COM1_A/D23 53 AD23 [B2]
COM1_A/D24 95 AD24 [B4]
COM1_A/D25 49 AD25 [A5]
COM1_A/D26 94 AD26 [B5]
COM1_A/D27 93 AD27 [B6]
COM1_A/D28 130 AD28 [C4]
COM1_A/D29 129 AD29 [C7]
COM1_A/D30 46 AD30 [A8]
COM1_A/D31 91 AD31 [B8]
COM1_CBE0 107 C/BE0 [M4]
COM1_CBE1 105 C/BE1 [L3]
COM1_CBE2 100 C/BE2 [F3]
COM1_CBE3 132 C/BE3 [C4]
COM1_PAR 9 PAR [J1]
COM1_FRAME# 57 FRAME [F2]
COM1_IRDY# 4 IRDY [F1]
COM1_TRDY# 101 TRDY [G3]
COM1_STOP# 5 STOP [H1]
R1001 100 50 IDSEL [A4]
COM1_DEVSEL# 102 DEVSEL [H3]
COM1_BM_REQ_L1 97 REQ [C3]
COM1_BM_GNT_O1 103 GNT [J3]
COM1_PCI_INT1 58 INTA [H2]
COM1_SERR# 61 SERR [A2]
COM1_PERR# 60 PERR [J2]
COM1_PCI_CLK1 7 CLK [G1]
R1002 10k 128 CLKRUN [C8]
RST [C2]
PME [A6]
ISOLATE [B9]
ALTRST [A9]
V I O [G2]
R1003 10k
R1004 10k
R1009 470
R1010 470
CL-196YG-CD-T D1002
D1001 CL-196YG-CD-T
IC606 (5/7) SN74LVC04APWR
IC607 (1/2) TC7SZ125FU (TE85R)
IC606 (4/7) SN74LVC04APWR
R1025 470
R1023 470 NM
R1024 470
CTRL_ACT_LED 013
CTRL_LINK_LED 013
ACTLED [C11]
LILED [A12]
SPEEDLED [B11]
TDP [C13]
TDN [C14]
RDP [E13]
RDN [E14]
R1011 100
R1012 100
R1021 22
ETHTDP 013
ETHTDN 013
ETHRDP 013
ETHRDN 013
X1 [N11]
X2 [P11]
RBIAS100 [B13]
RBIAS10 [B14]
VREF [C12]
R1013 470
R1014 470
R1015 150
R1016 470
R1022 220
FLD7 [J14]
FLD6 [H12]
FLD5 [H13]
FLD4 [H14]
FLD3 [G12]
FLD2 [F12]
FLD1 [F13]
FLD0 [F14]
FLA16/CLK25 [P9]
FLA15/EESK [M10]
FLA14/EEDO [N10]
FLA13/EEDI [P10]
FLA12 [M11]
FLA11 [M12]
FLA10 [N13]
FLA9 [P13]
FLA8 [N14]
FLA7/CLKENB [M13]
FLA6 [M14]
FLA5 [L12]
FLA4 [L13]
FLA3 [L14]
FLA2 [K14]
FLA1/AUXPWR [J12]
FLA0 [J13]
EECS [P7]
FLCS [N9]
FLOE [M8]
FLWE [M9]
TEST [A13]
TCK [D14]
T I [D12]
TEXEC [D13]
TO [B12]
NC1 [A1]
NC2 [P1]
NC3 [P14]
NC4 [A14]
NC5 [A10]
NC6 [B10]
NC7 [C9]
NC8 [C5]
NC9 [G4]
NC10 [H4]
NC11 [J4]
NC12 [L7]
NC13 [L8]
NC14 [D10]
NC15 [D9]
IC602 93LC46BT-I/SN
C1022 0.1uF
R1017 10k
R1018 10k
VCC
DO
DI
CS
CLK
NC1
NC2
VSS
VSS [D4]
VSS [E4]
VSS [F4]
VSS [L6]
VSS [K11]
VSS [G11]
VSS [F11]
VSS [E11]
VSS [D11]
VSS [D10]
VSS [D7]
VSS [D6]
VSS [E6]
VSS [F6]
VSS [F7]
VSS [F8]
VSS [F9]
VSS [F10]
VSS [E10]
VSS [E9]
VSS [E8]
VSS [E7]
VSS [G6]
VSS [H6]
VSS [J6]
VSS [K6]
VSS [K7]
VSS [K8]
VSS [K9]
VSS [K10]
VSS [J10]
VSS [H10]
VSS [H9]
VSS [H8]
VSS [H7]
VSS [G7]
VSS [G8]
VSS [G9]
VSS [G10]
VSS [G5]
VSS [F5]
VSS [E5]
VSS [D5]
VSS [C6]
VSS [C7]
VSS [C8]
VSS [C9]
VSS [C10]
VSS [B7]
VSS [B6]
VSS [B5]
VSS [B4]
VSS [B3]
VSS [B2]
VSS [A4]
VSS [A5]
VSS [A6]
VSS [A7]
VSS [A8]
VSS [A9]
VSS [A11]
VSS [A12]
VSS [A13]
VSS [B8]
VSS [B9]
VSS [B10]
VSS [B11]
VSS [C11]
VSS [C12]
VSS [C13]
VSS [C14]
VSS [D12]
VSS [D13]
VSS [D14]
VSS [E12]
VSS [E13]
VSS [E14]
VSS [F14]
VSS [F13]
VSS [F12]
VSS [G12]
VSS [G13]
VSS [G14]
VSS [H12]
VSS [H13]
VSS [H14]
VSS [J14]
VSS [J13]
VSS [J12]
VSS [K12]
VSS [K13]
VSS [K14]
VSS [L14]
VSS [L13]
VSS [L12]
VSS [M12]
VSS [M13]
VSS [M14]
VSS [N14]
VSS [N13]
VSS [N12]
VSS [N11]
VSS [N10]
VSS [N9]
VSS [N8]
VSS [N7]
VSS [N6]
VSS [N5]
VSS [N4]
VSS [N3]
VSS [N2]
VSS [M1]
VSS [M2]
VSS [M3]
VSS [L1]
VSS [L2]
VSS [K1]
VSS [J1]
VSS [J2]
VSS [J3]
VSS [H2]
VSS [H1]
VSS [G1]
VSS [G2]
VSS [G3]
VSS [F2]
VSS [F1]
VSS [E1]
VSS [E2]
VSS [E3]
VSS [D1]
VSS [D2]
VSS [D3]
VSS [C1]
VSS [B1]
VSS [B2]
VSS [B4]
VSS [C4]
VSS [C5]
VSS [C6]
VSS [C7]
VSS [C8]
VSS [C9]
VSS [C10]
VSS [B7]
VSS [B6]
VSS [B5

CA-54C (11/17)
SUFFIX: -24

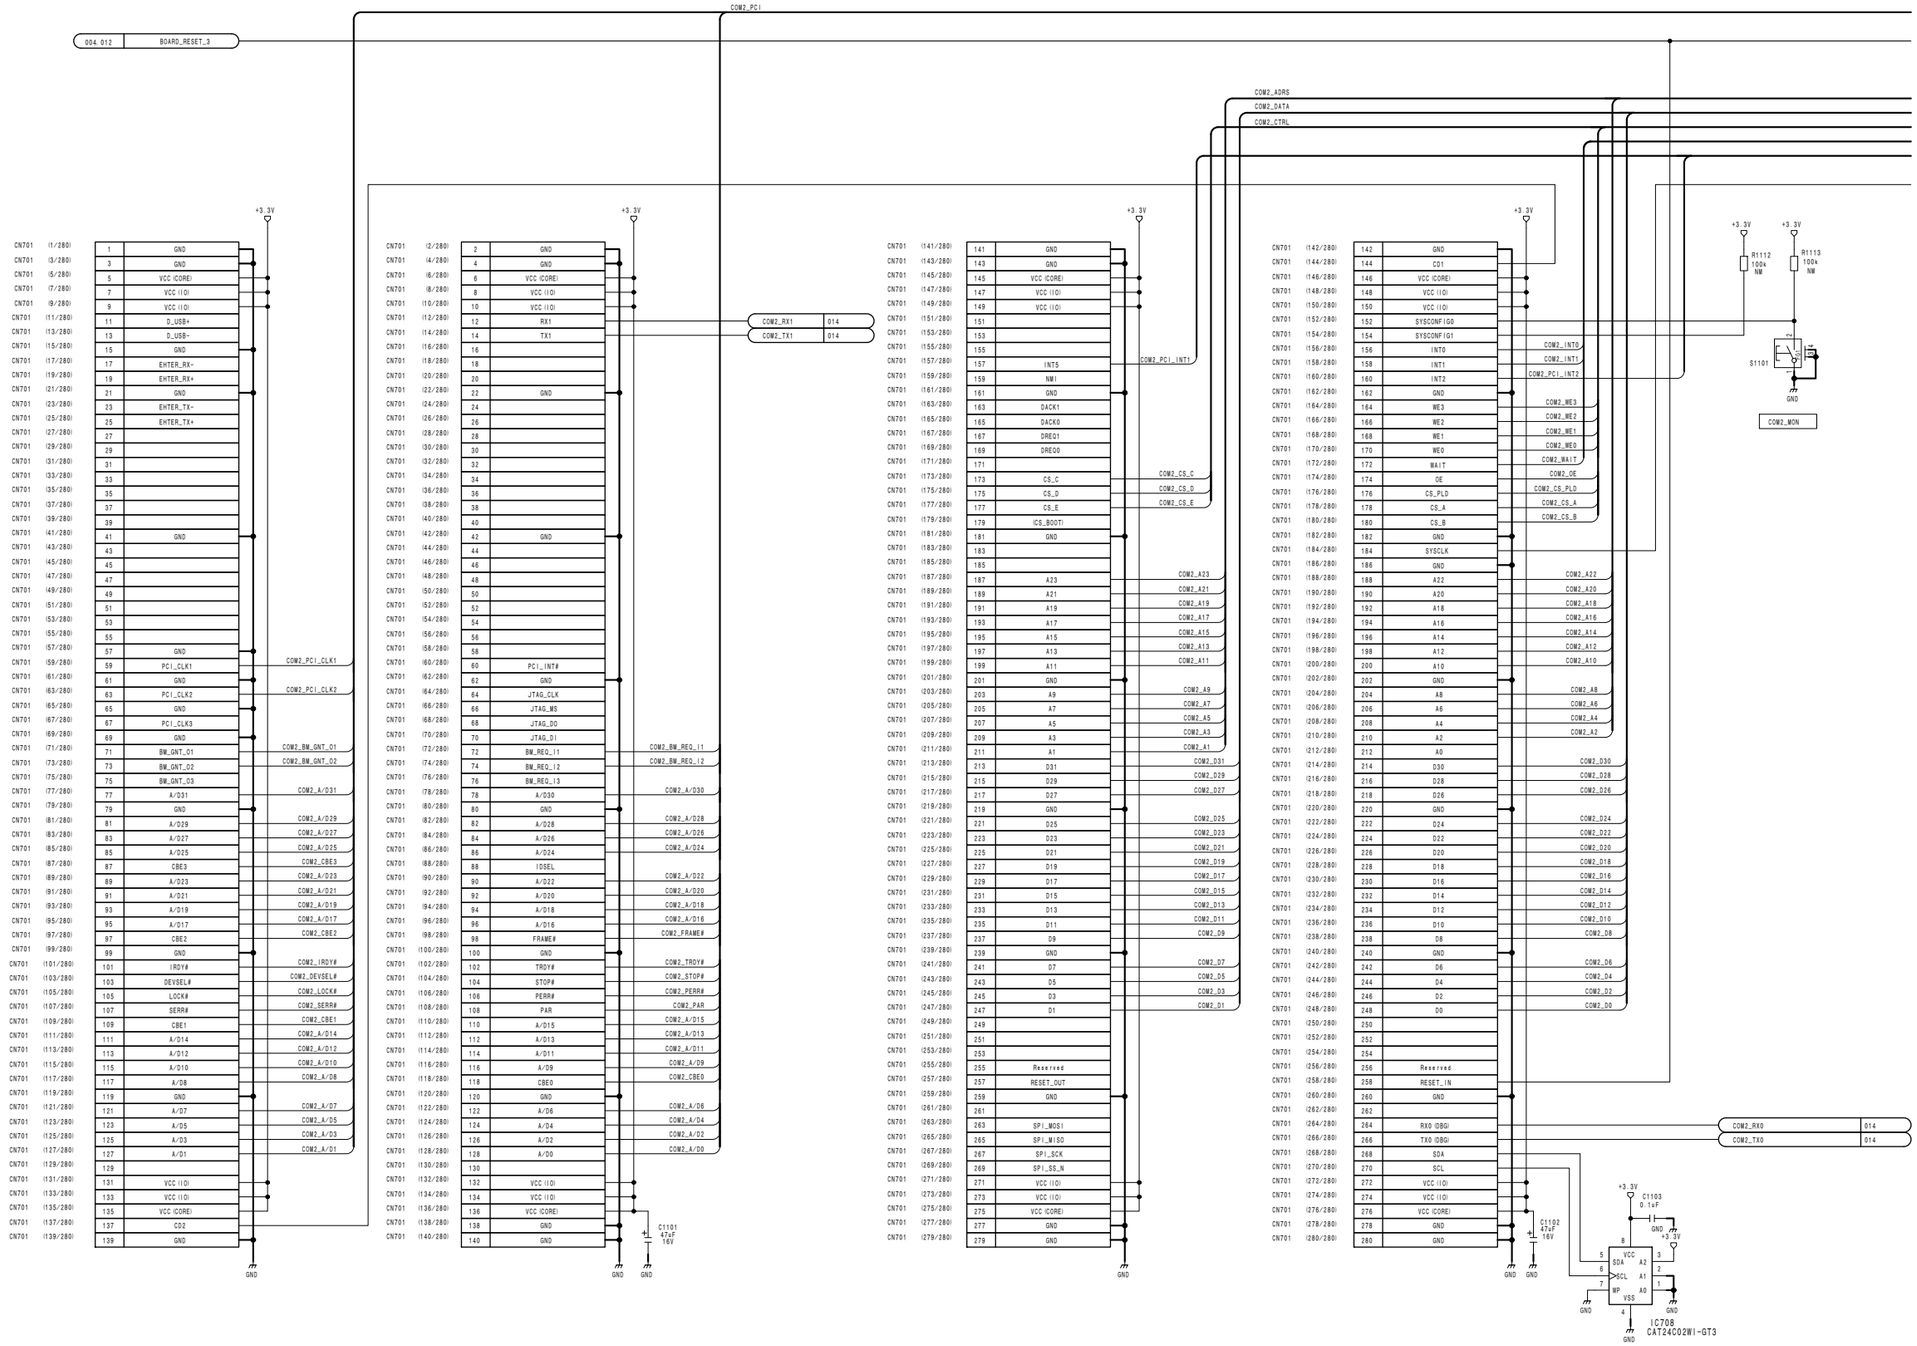

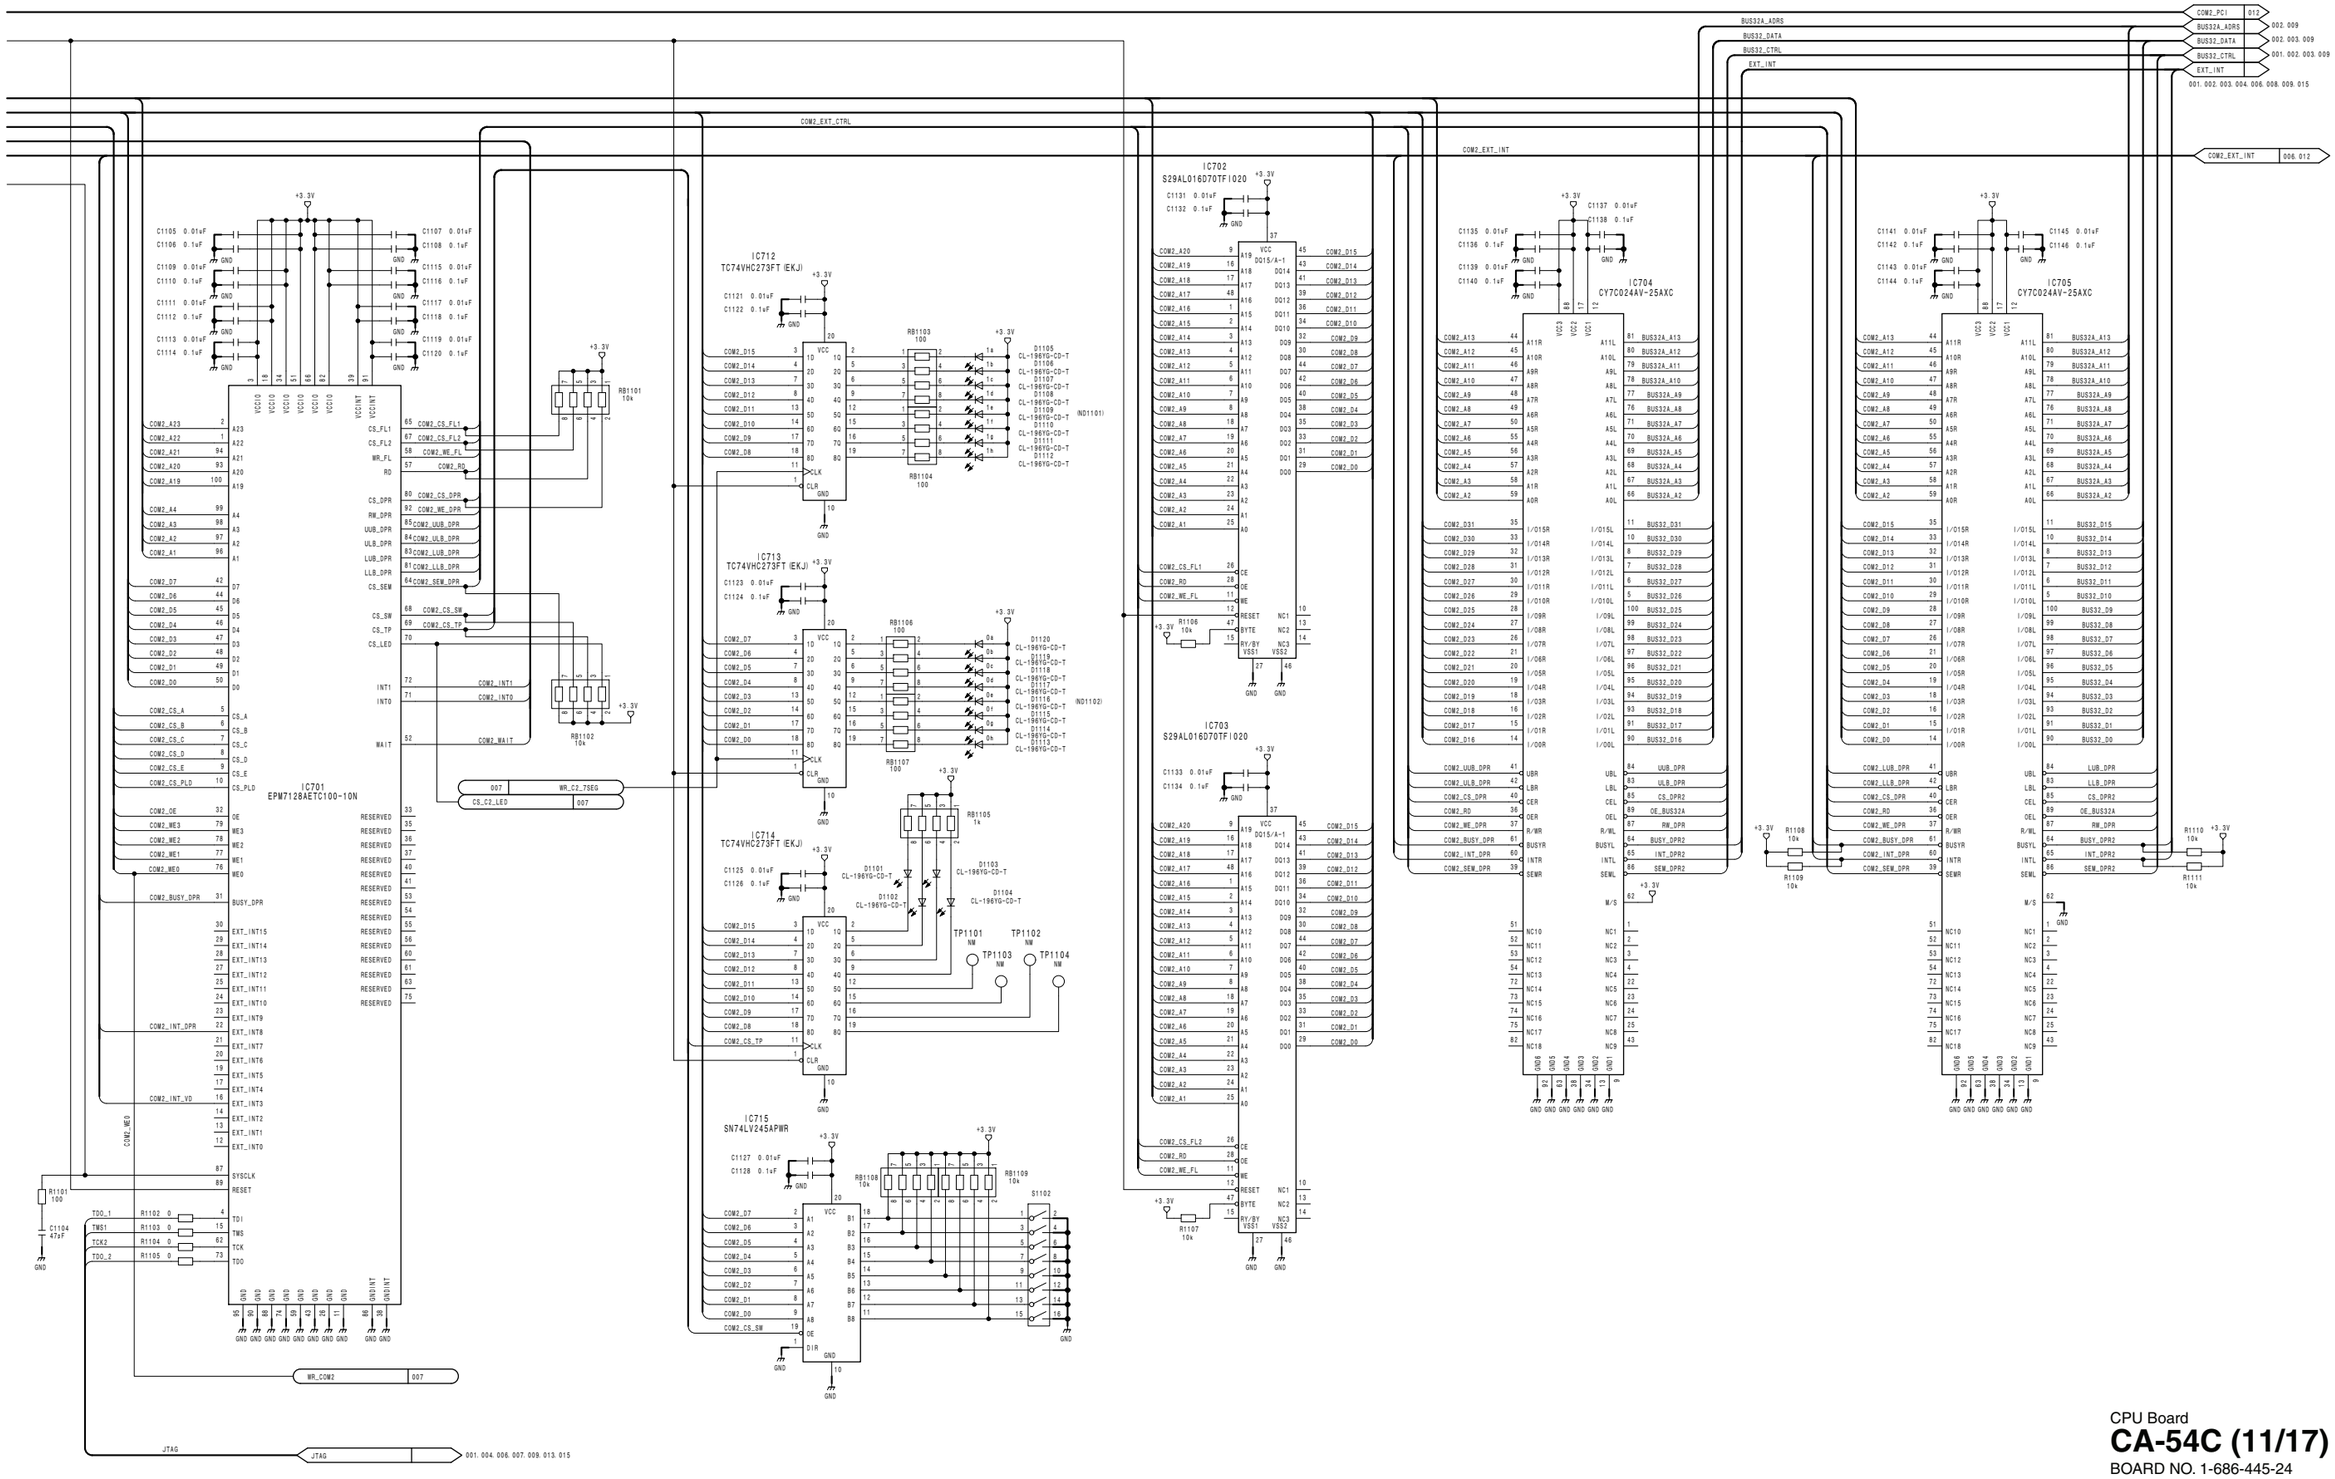


CPU Board
CA-54C (11/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_11

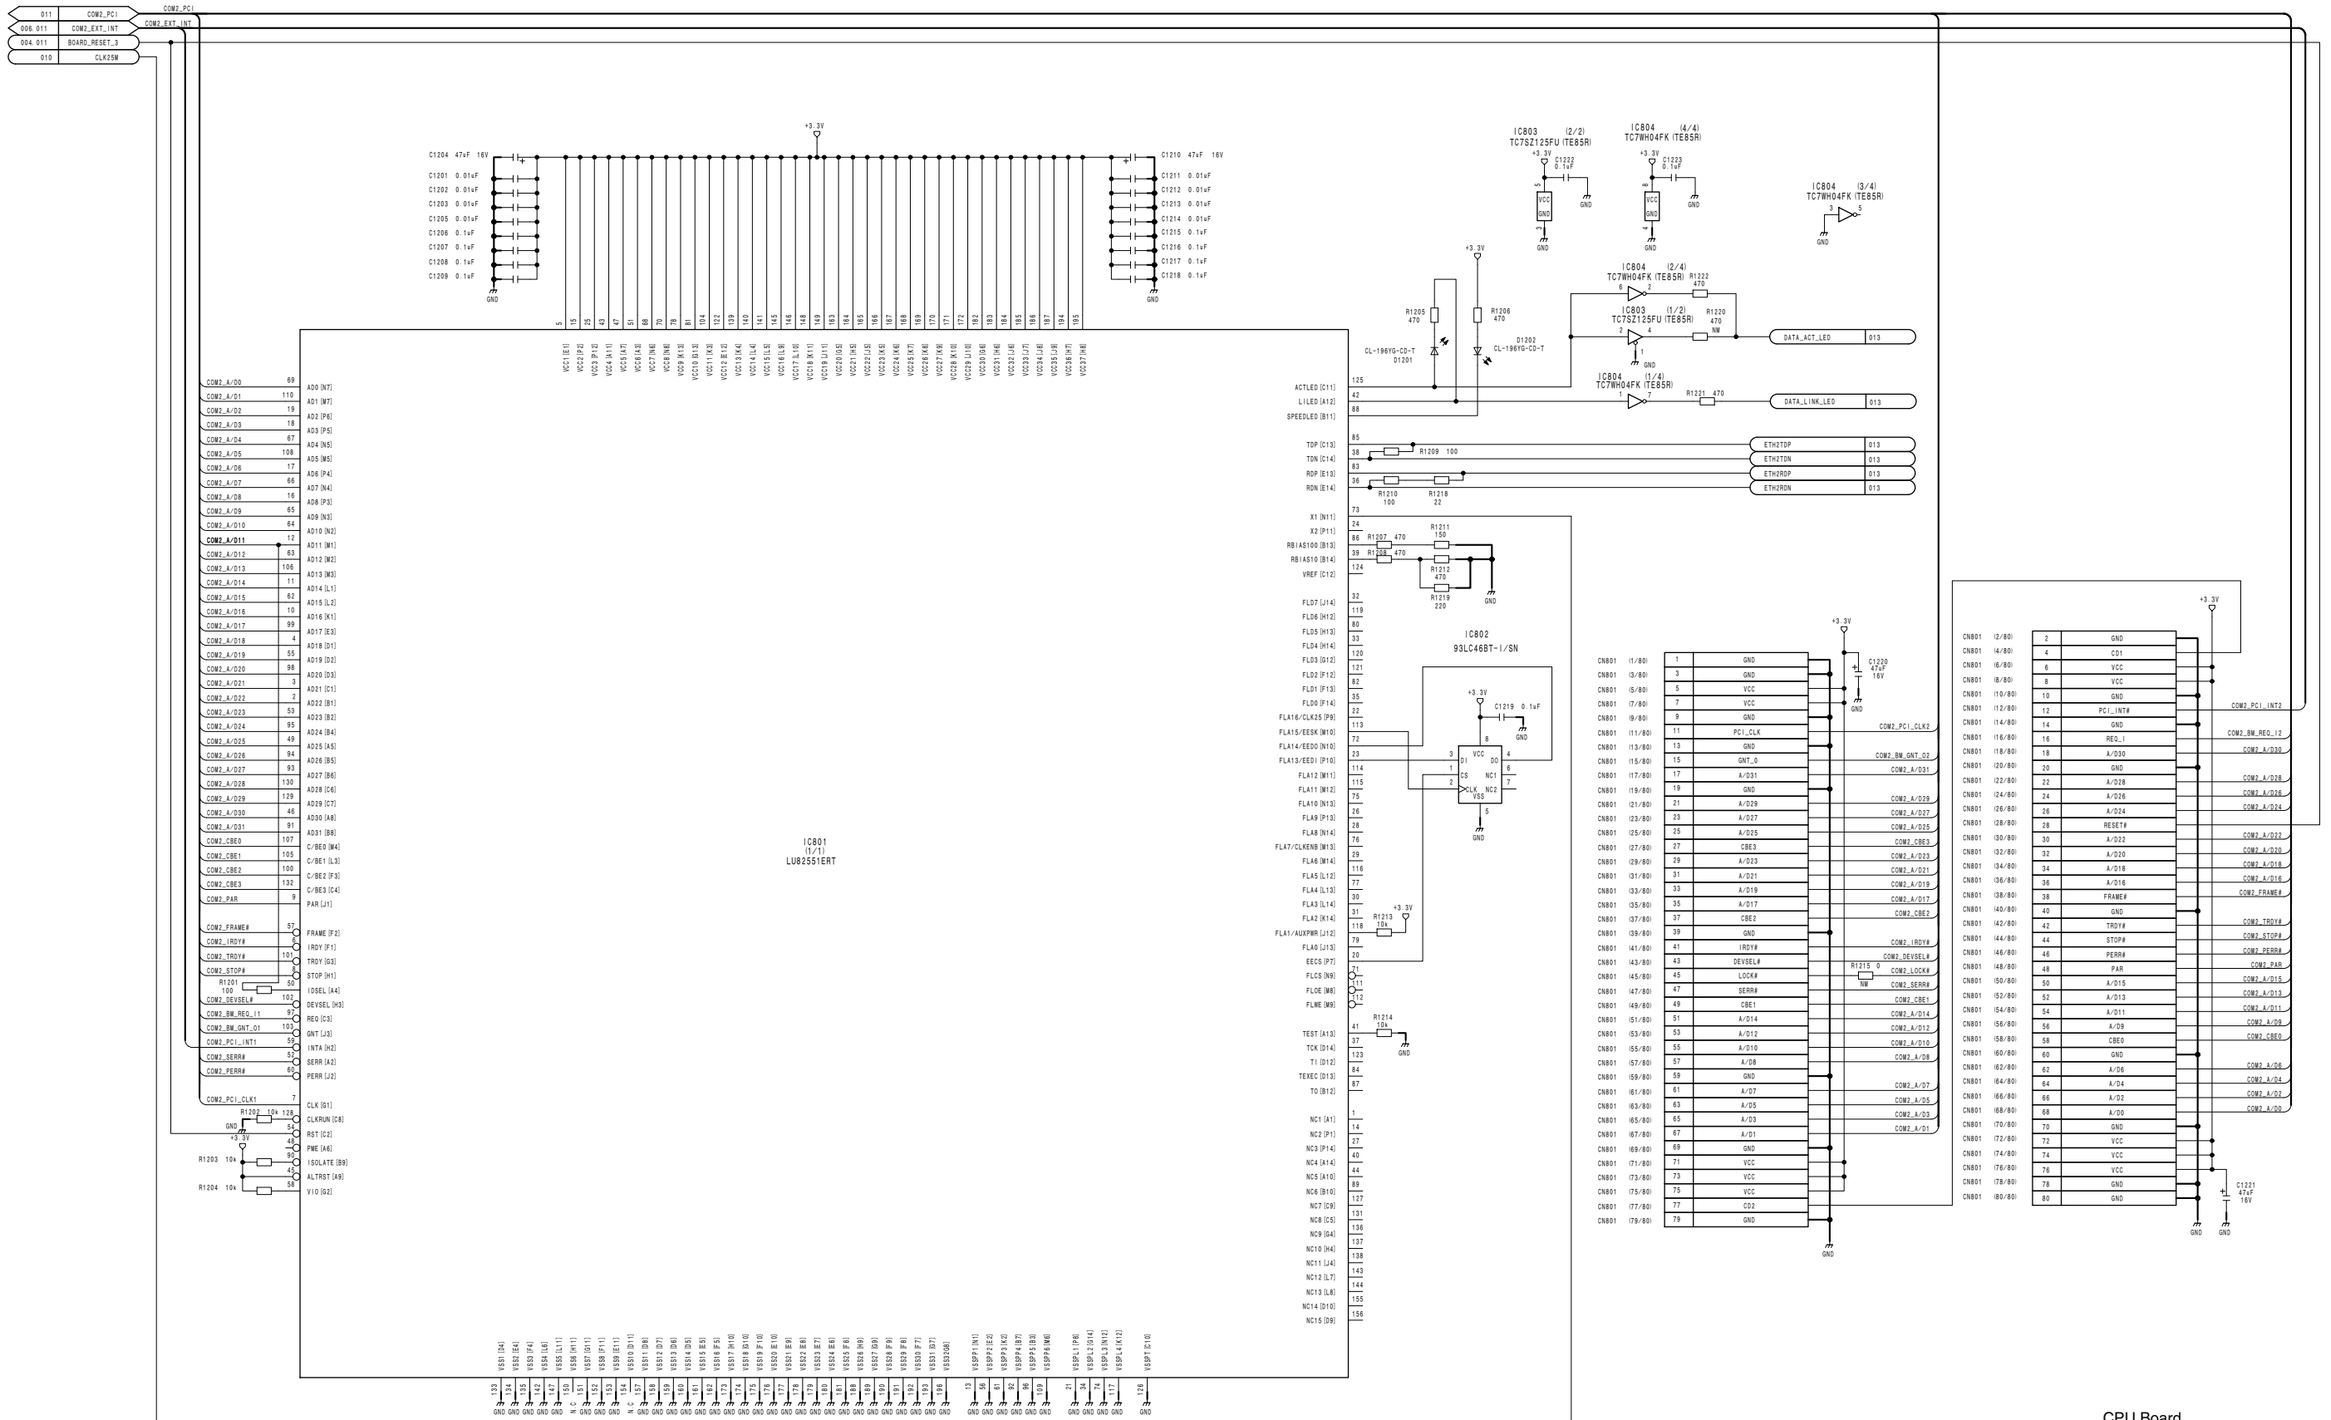

CPU Board
CA-54C (12/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_12

CA-54C (13/17)
SUFFIX: -24

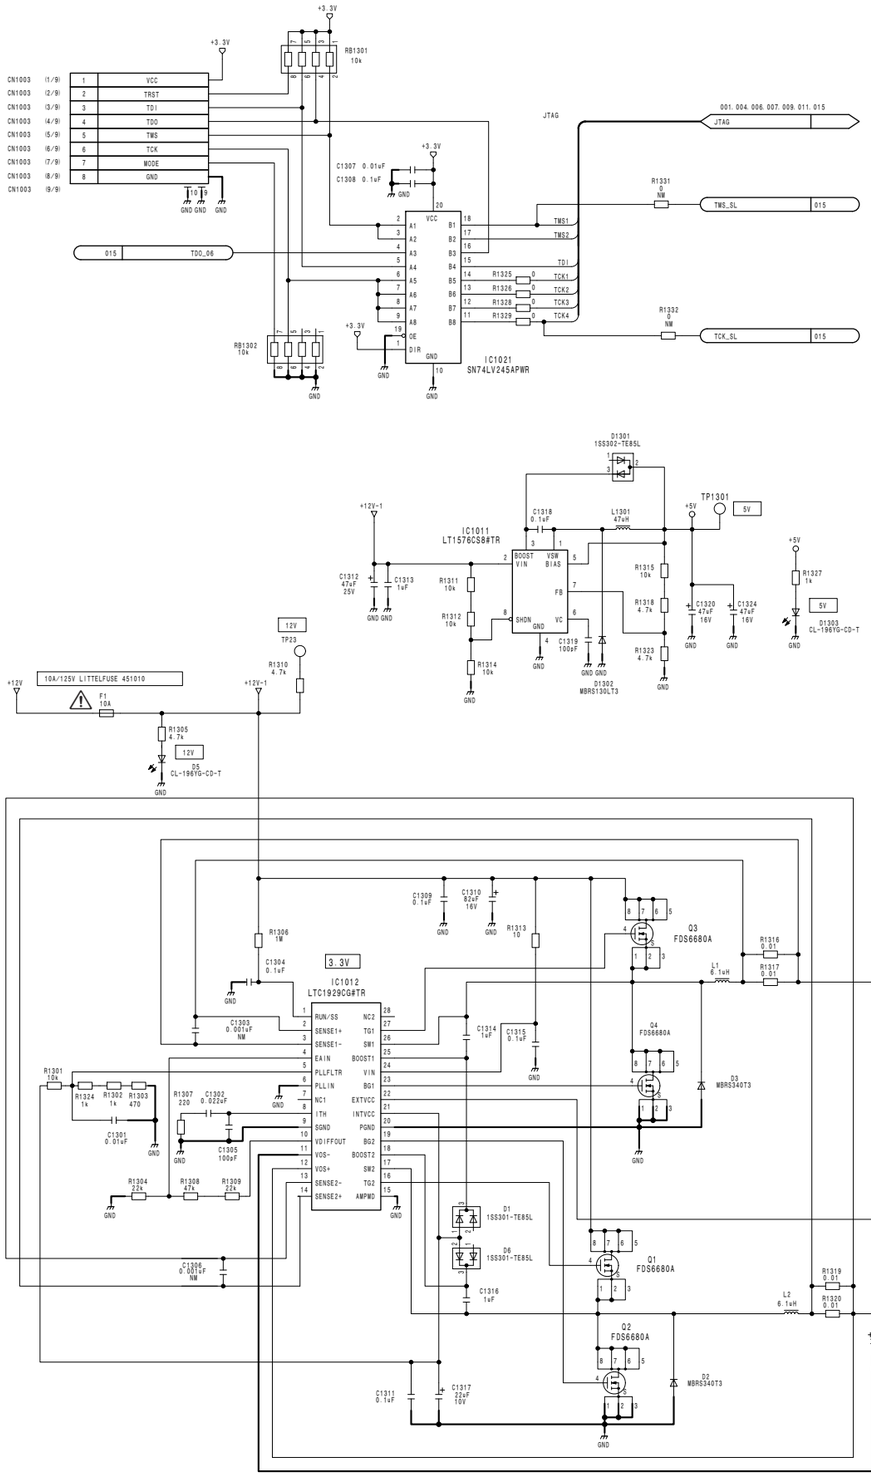

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	DC_ENBL	DC_ENBL	GND	FAN_CTRL	FUSE+12V	GND
6	SLOT7	SLOT6	GND	SLOT5	SLOT4	GND
7	SLOT3	SLOT2	GND	SLOT1	SLOT0	GND
8	RESET_1L	RESET_2L	GND	RESET_3L	RESET_4L	GND
9	FAN_RE_ERR	FAN_RF_ERR	GND	FAN_RG_ERR	FAN_RH_ERR	GND
10	FAN_RA_ERR	FAN_RB_ERR	GND	FAN_RC_ERR	FAN_RD_ERR	GND
11	FORMAT	ACERROR0	GND	DCERROR0	FANERROR0	GND
12						GND
13						GND
14						GND
15	FAN_RI_ERR	FAN_RJ_ERR	GND	FAN_RK_ERR	FAN_RL_ERR	GND
16	PSEXIST1	ACERROR1	GND	DCERROR1	FANERROR1	GND
17	GLED1	RLED1	GND	RS+ (1)	GNDRS- (1)	GND
18	PSEXIST2	ACERROR2	GND	DCERROR2	FANERROR2	GND
19	GLED2	RLED2	GND	RS+ (2)	GNDRS- (2)	GND
20	PSEXIST3	ACERROR3	GND	DCERROR3	FANERROR3	GND
21	GLED3	RLED3	GND	RS+ (3)	GNDRS- (3)	GND
22	PSEXIST4	ACERROR4	GND	DCERROR4	FANERROR4	GND
23	GLED4	RLED4	GND	RS+ (4)	GNDRS- (4)	GND
24	PSEXIST5	ACERROR5	GND	DCERROR5	FANERROR5	GND
25	GLED5	RLED5	GND	RS+ (5)	GNDRS- (5)	GND

CNX1

	a	b	c	d	e	FG
1	INET4TAP	INET4TAN	GND	INET4TBP	INET4TBN	GND
2	INET3TAP	INET3TAN	GND	INET3TBP	INET3TBN	GND
3	INET2TAP	INET2TAN	GND	INET2TBP	INET2TBN	GND
4	INET1TAP	INET1TAN	GND	INET1TBP	INET1TBN	GND
5			GND			GND
6			GND			GND
7	INET0TAP	INET0TAN	GND	INET0TBP	INET0TBN	GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16	INET6TAP	INET6TAN	GND	INET6TBP	INET6TBN	GND
17			GND			GND
18	GPIIN9	GPIIN10	GND	GPIIN11	GPIIN12	GND
19	GPIIN13	GPIIN14	GND	GPIIN15	GPIIN16	GND
20	GPIOUT9A	GPIOUT9B	GND	GPIOUT10A	GPIOUT10B	GND
21	GPIOUT11A	GPIOUT11B	GND	GPIOUT12A	GPIOUT12B	GND
22	GPIOUT13	GPIOUT14	GND	GPIOUT15	GPIOUT16	GND
23			GND	GND	GND	GND
24			GND	GND		GND
25			GND	GND	GND	GND

CNV1

	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	GPIIN1	GPIIN2	GND	GPIIN3	GPIIN4	GND
3	GPIIN5	GPIIN6	GND	GPIIN7	GPIIN8	GND
4	GPIOUT1A	GPIOUT1B	GND	GPIOUT2A	GPIOUT2B	GND
5	GPIOUT3A	GPIOUT3B	GND	GPIOUT4A	GPIOUT4B	GND
6	GPIOUT5	GPIOUT6	GND	GPIOUT7	GPIOUT8	GND
7	GND (GPICOM1)	GND (GPICOM2)	GND	GND (GPICOM3)	GND (GPICOM4)	GND
8	GND	GND	GND	GND	GND	GND
9	RS232CTX	RS232CRX	GND			GND
10	GND	GND	GND	GND	GND	GND
11	RS422TX1P	RS422TX1N	GND	RS422RX1P	RS422RX1N	GND
12	GND	GND	GND	GND	GND	GND
13	RS422TX2P	RS422TX2N	GND	RS422RX2P	RS422RX2N	GND
14	GND	GND	GND	GND	GND	GND
15	RS422TX3P	RS422TX3N	GND	RS422RX3P	RS422RX3N	GND
16	GND	GND	GND	GND	GND	GND
17	RS422TX4P	RS422TX4N	GND	RS422RX4P	RS422RX4N	GND
18	GND	GND	GND	GND	GND	GND
19	RS422VT1P	RS422VT1N	GND	RS422VT2P	RS422VT2N	GND
20	GND	GND	GND	GND	GND	GND
21	WB_3V	WB_3V	GND	WB_SCL	WB_SDA	GND
22	GND	GND	GND	GND	GND	GND

CNY1

	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	GND		GND	GND	REF_IN	GND
3	GND	GND	GND	GND	GND	GND
4	GND		GND	GND	REF_OUT	GND
5	GND	GND	GND	GND	GND	GND
6	POW_SEQ0	POW_SEQ1	GND	IO0	IO1	GND
7	IO2	IO3	GND	IO4	IO5	GND
8	BD_EXT_SL16F	BD_EXT_SL16R	GND	BD_EXT_SL8F	BD_EXT_SL8R	GND
9	BD_EXT_SL15F	BD_EXT_SL15R	GND	BD_EXT_SL7F	BD_EXT_SL7R	GND
10	BD_EXT_SL14F	BD_EXT_SL14R	GND	BD_EXT_SL6F	BD_EXT_SL6R	GND
11	BD_EXT_SL13F	BD_EXT_SL13R	GND	BD_EXT_SL5F	BD_EXT_SL5R	GND
12	BD_EXT_SL12F	BD_EXT_SL12R	GND	BD_EXT_SL4F	BD_EXT_SL4R	GND
13	BD_EXT_SL11F	BD_EXT_SL11R	GND	BD_EXT_SL3F	BD_EXT_SL3R	GND
14	BD_EXT_SL10F	BD_EXT_SL10R	GND	BD_EXT_SL2F	BD_EXT_SL2R	GND
15	BD_EXT_SL9F	BD_EXT_SL9R	GND	BD_EXT_SL1F	BD_EXT_SL1R	GND
16	CTRL_LINK_LED	CTRL_ACT_LED	GND	DATA_LINK_LED	DATA_ACT_LED	GND
17	HFCK32P	HFCK32N	GND	HFCK30P	HFCK30N	GND
18	HFCK29P	HFCK29N	GND	HFCK28P	HFCK28N	GND
19	HFCK27P	HFCK27N	GND	HFCK25P	HFCK25N	GND
20	HFCK23P	HFCK23N	GND	HFCK19P	HFCK19N	GND
21	HFCK17P	HFCK17N	GND	HFCK15P	HFCK15N	GND
22	HFCK13P	HFCK13N	GND	HFCK11P	HFCK11N	GND

CNW1


	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	ETH1TDP	ETH1TDN	GND	ETH1RDP	ETH1RDN	GND
3	GND	GND	GND	GND	GND	GND
4	ETH2TDP	ETH2TDN	GND	ETH2RDP	ETH2RDN	GND
5	GND	GND	GND	GND	GND	GND
6	BUS_A0	BUS_A1	GND	BUS_A2	BUS_A3	GND
7	BUS_A4	BUS_A5	GND	BUS_A6	BUS_A7	GND
8	BUS_A8	BUS_A9	GND	BUS_A10	BUS_A11	GND
9	BUS_A12	BUS_A13	GND	BUS_A14	BUS_A15	GND
10	BUS_OE	BUS_WE	GND	BUS_CS1	BUS_CS2	GND
11	BUS_CS3	BUS_CS4	GND	BUS_CS5	RESERVE_OUT1	GND
12						GND
13						GND
14						GND
15	BUS_D0	BUS_D1	GND	BUS_D2	BUS_D3	GND
16	BUS_D4	BUS_D5	GND	BUS_D6	BUS_D7	GND
17	BUS_D8	BUS_D9	GND	BUS_D10	BUS_D11	GND
18	BUS_D12	BUS_D13	GND	BUS_D14	BUS_D15	GND
19	BUS_INT	BUS_BUSY	GND	BUS_UB	BUS_LB	GND
20	RESERVE_IN1	RESERVE_IN2	GND	RESERVE_IN3	RESERVE_IN4	GND
21	FLOE_RTN_P	FLOE_RTN_N	GND		DME_BKE_N	GND
22	INET7TAP	INET7TAN	GND	INET7TBP	INET7TBN	GND
23	INET8TAP	INET8TAN	GND	INET8TBP	INET8TBN	GND
24	INET9TAP	INET9TAN	GND	INET9TBP	INET9TBN	GND
25	INET10TAP	INET10TAN	GND	INET10TBP	INET10TBN	GND

CNZ1

	a	b	c	d	e	FG
1	HFCK10P	HFCK10N	GND	HFCK08P	HFCK08N	GND
2	HFCK06P	HFCK06N	GND	HFCK04P	HFCK04N	GND
3	GND	GND	GND	GND	GND	GND
4	CKX8P	CKX8N	GND	CKX7P	CKX7N	GND
5	FLOE8P	FLOE8N	GND	FLOE7P	FLOE7N	GND
6	CKX6P	CKX6N	GND	CKX5P	CKX5N	GND
7	FLOE6P	FLOE6N	GND	FLOE5P	FLOE5N	GND
8	CKX4P	CKX4N	GND	CKX3P	CKX3N	GND
9	FLOE4P	FLOE4N	GND	FLOE3P	FLOE3N	GND
10	CKX2P	CKX2N	GND	CKX1P	CKX1N	GND
11	FLOE2P	FLOE2N	GND	FLOE1P	FLOE1N	GND
12						GND
13						GND
14						GND
15	HD8P	HD8N	GND	HD7P	HD7N	GND
16	VD8P	VD8N	GND	VD7P	VD7N	GND
17	HD6P	HD6N	GND	HD5P	HD5N	GND
18	VD6P	VD6N	GND	VD5P	VD5N	GND
19	HD4P	HD4N	GND	HD3P	HD3N	GND
20	VD4P	VD4N	GND	VD3P	VD3N	GND
21	HD2P	HD2N	GND	HD1P	HD1N	GND
22	VD2P	VD2N	GND	VD1P	VD1N	GND
23	GND	GND	GND	GND	GND	GND
24	FAN_LE_ERR	FAN_LF_ERR	GND	VD_IN_P	VD_IN_N	GND
25	FAN_LA_ERR	FAN_LB_ERR	GND	FAN_LC_ERR	FAN_LD_ERR	GND


CPU Board
CA-54C (13/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_13

CA-54C (14/17)
SUFFIX: -24

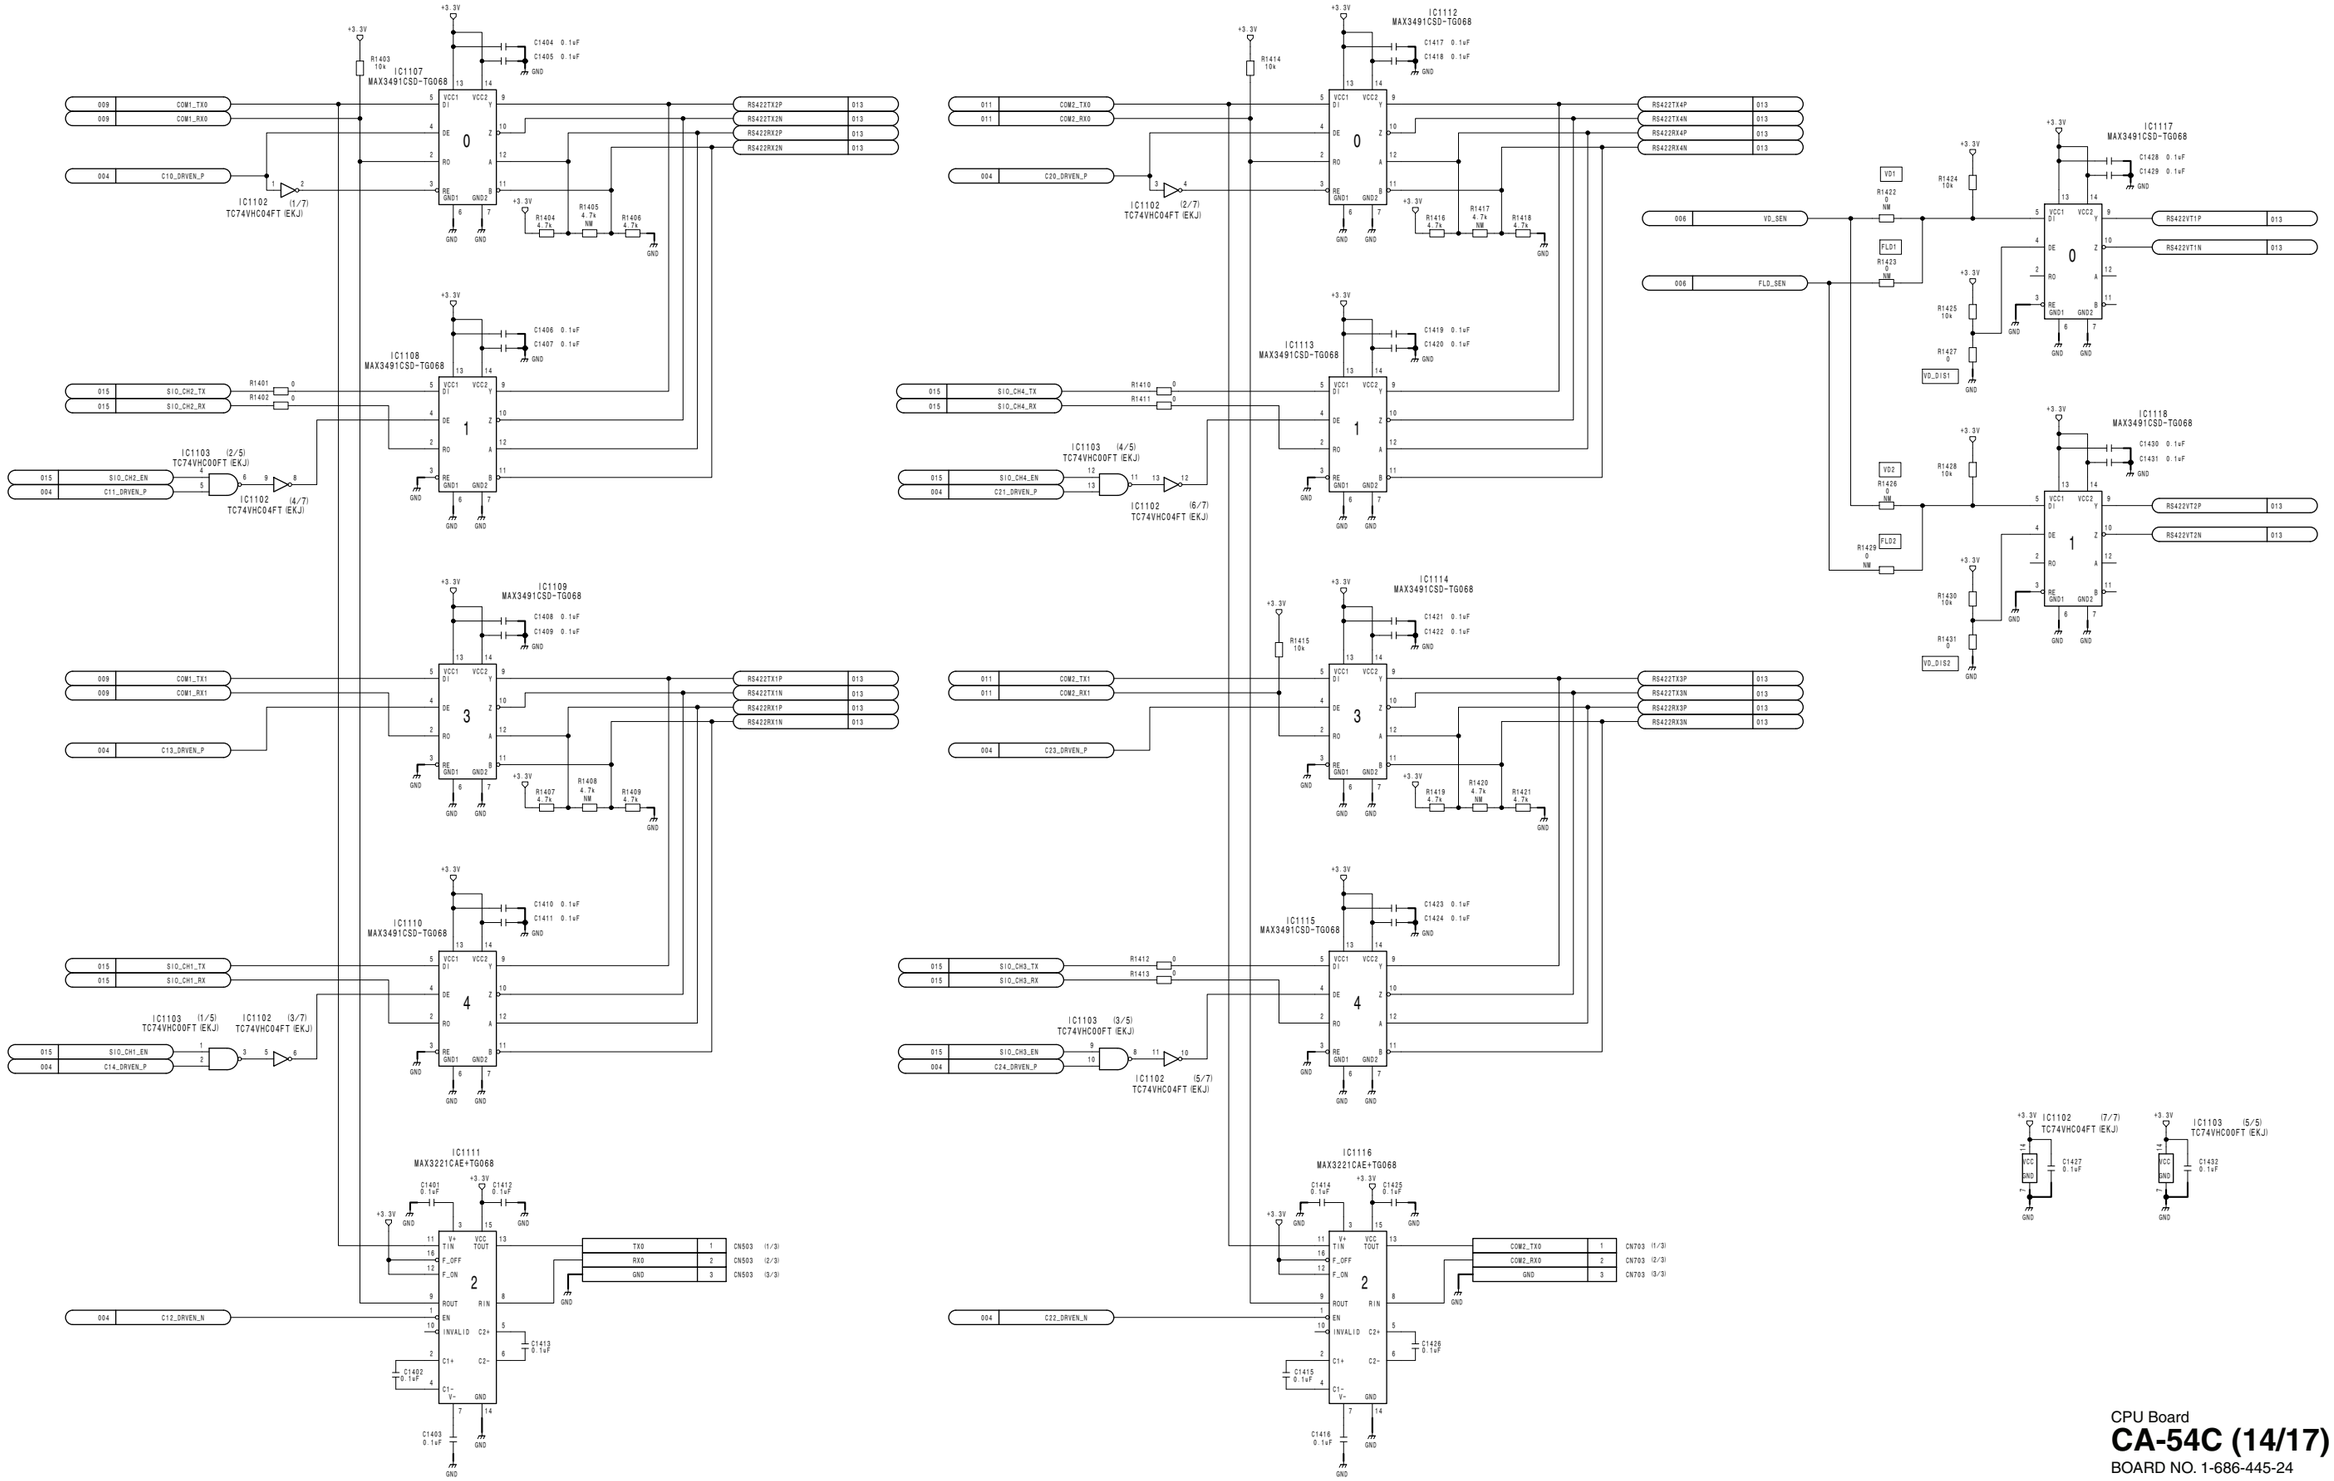


4-26


CPU Board
CA-54C (14/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_14

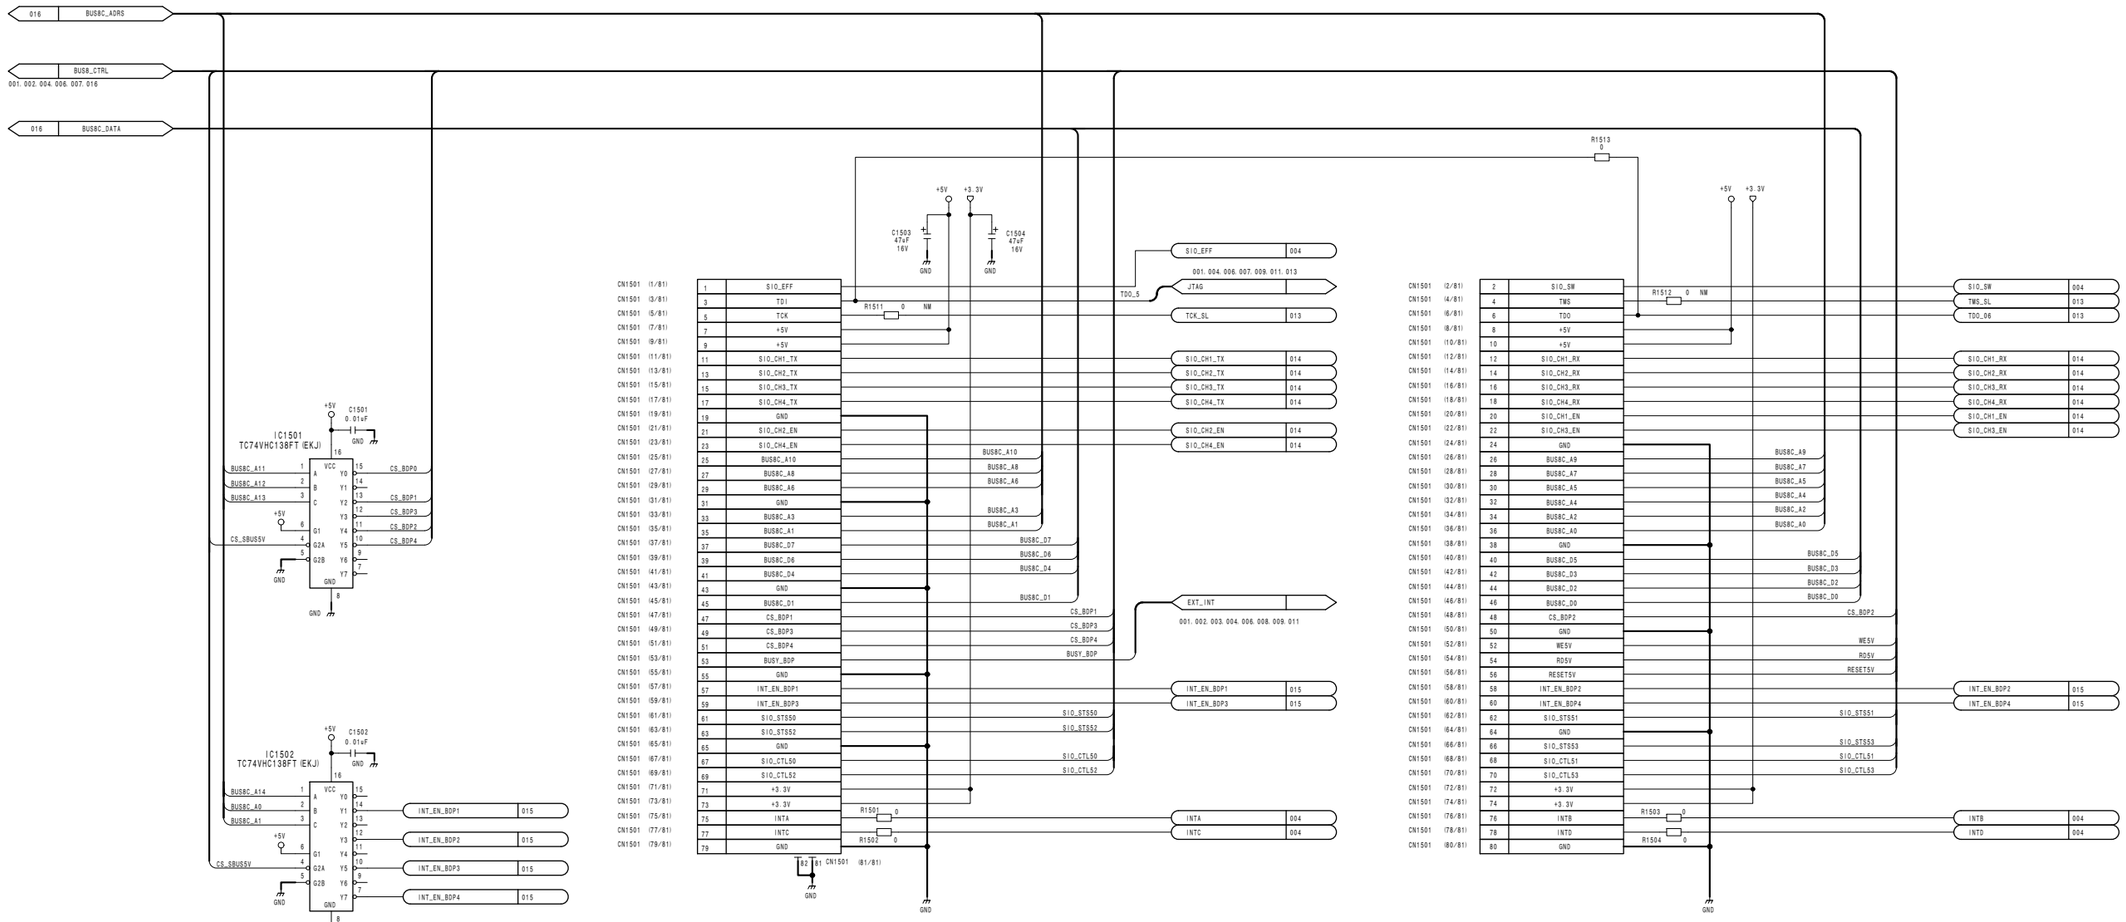

CPU Board
CA-54C (15/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_15


CA-54C (16/17)
SUFFIX: -24

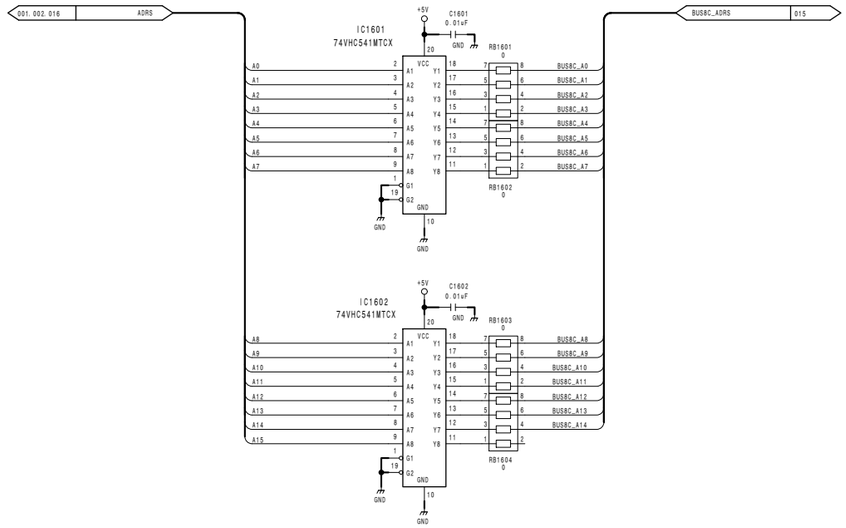

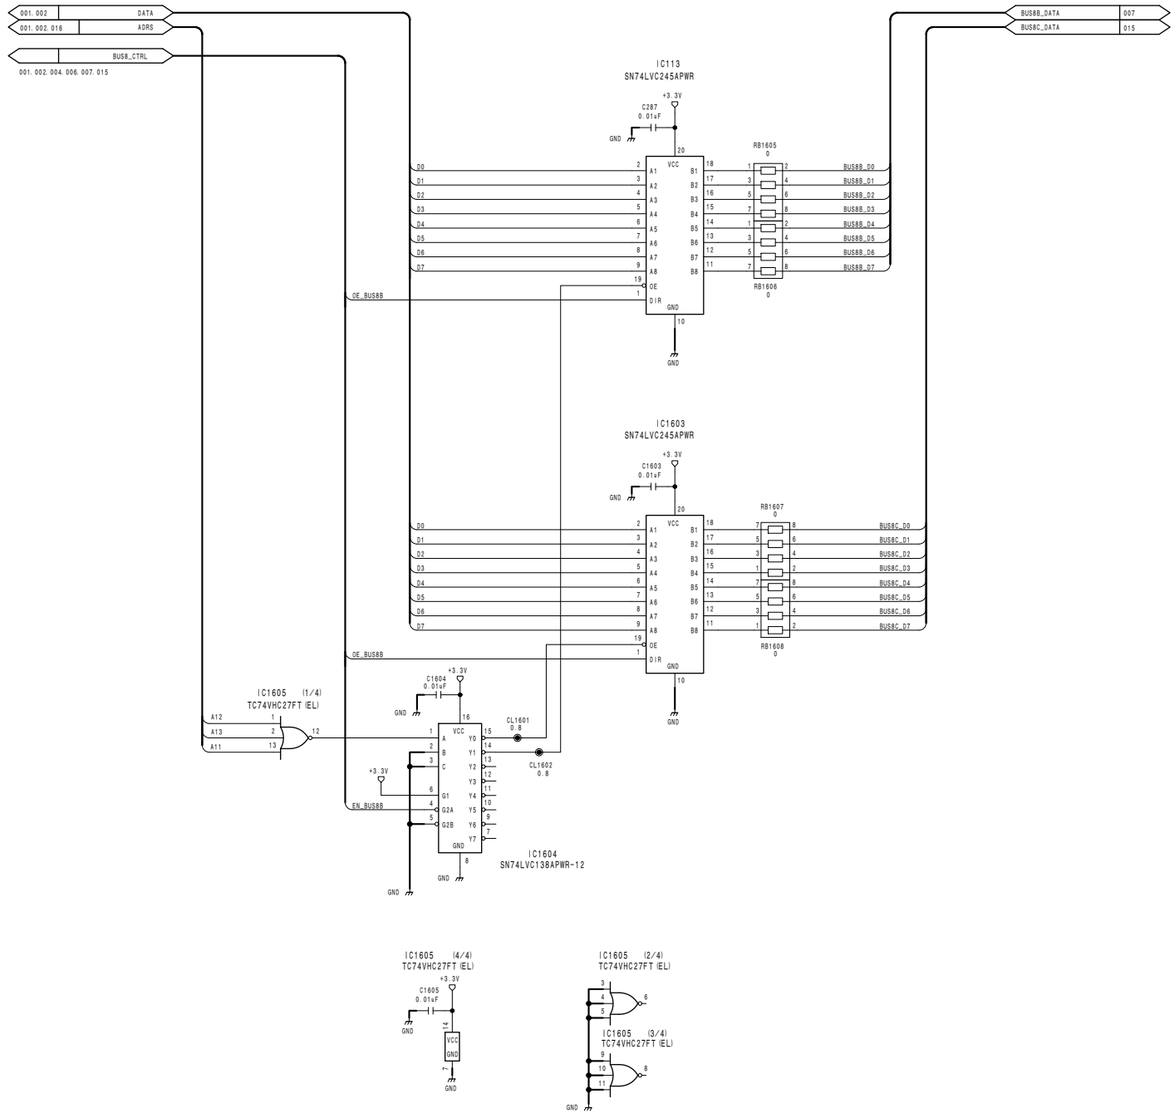

CPU Board
CA-54C (16/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_16


CA-54C (17/17)
SUFFIX: -24

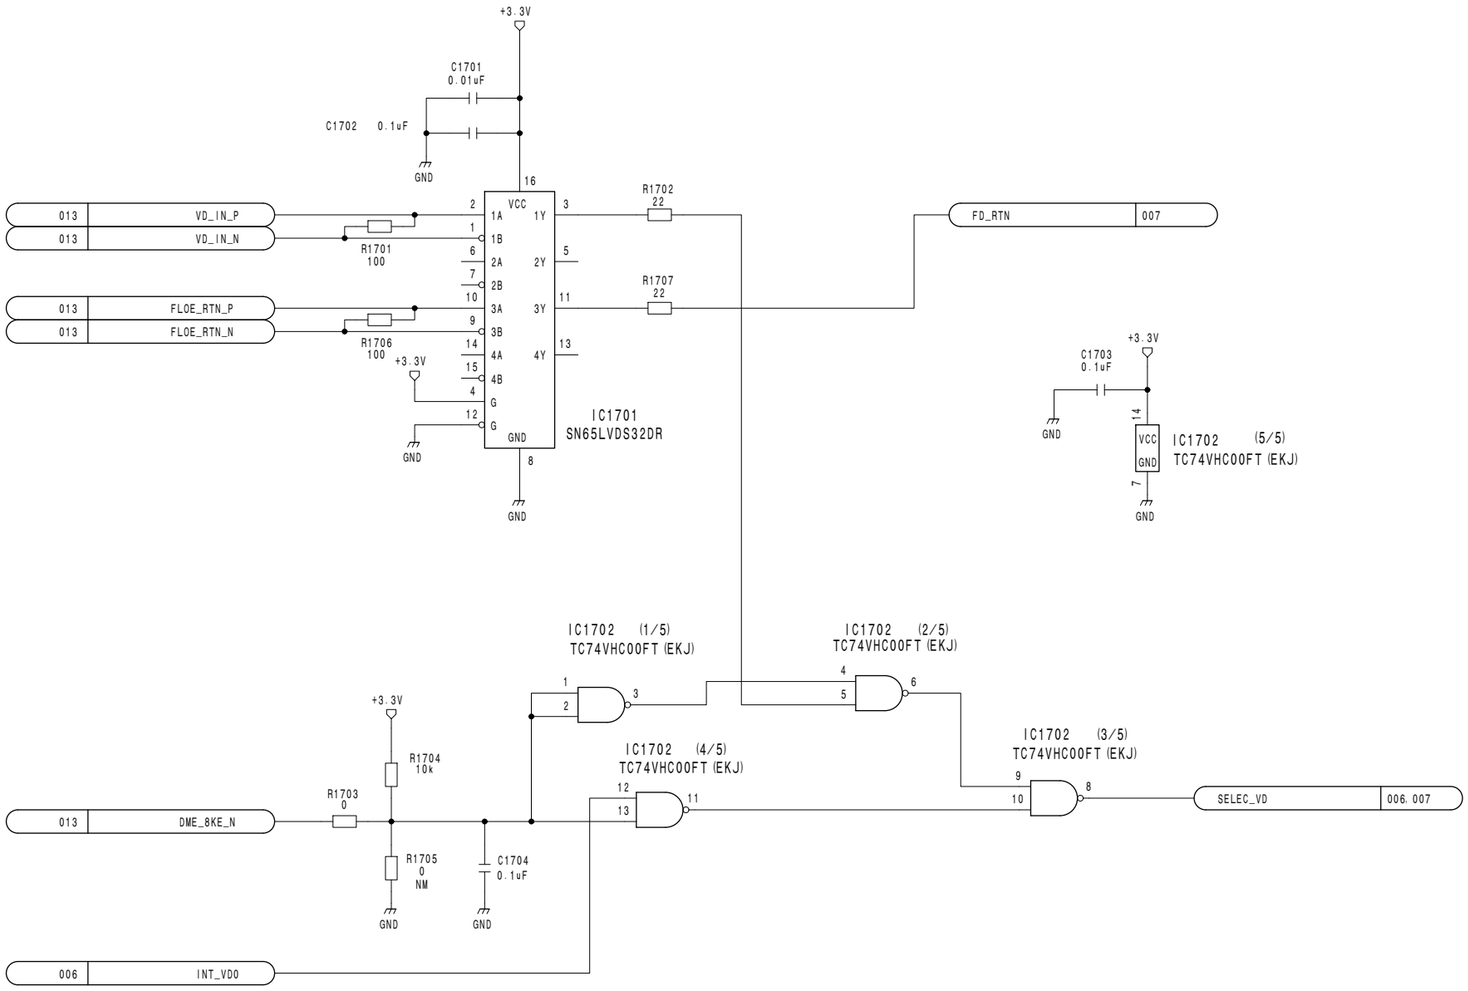

CPU Board
CA-54C (17/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54B_001_17

4-29


CA-54CFE (1/17)
SUFFIX: -24

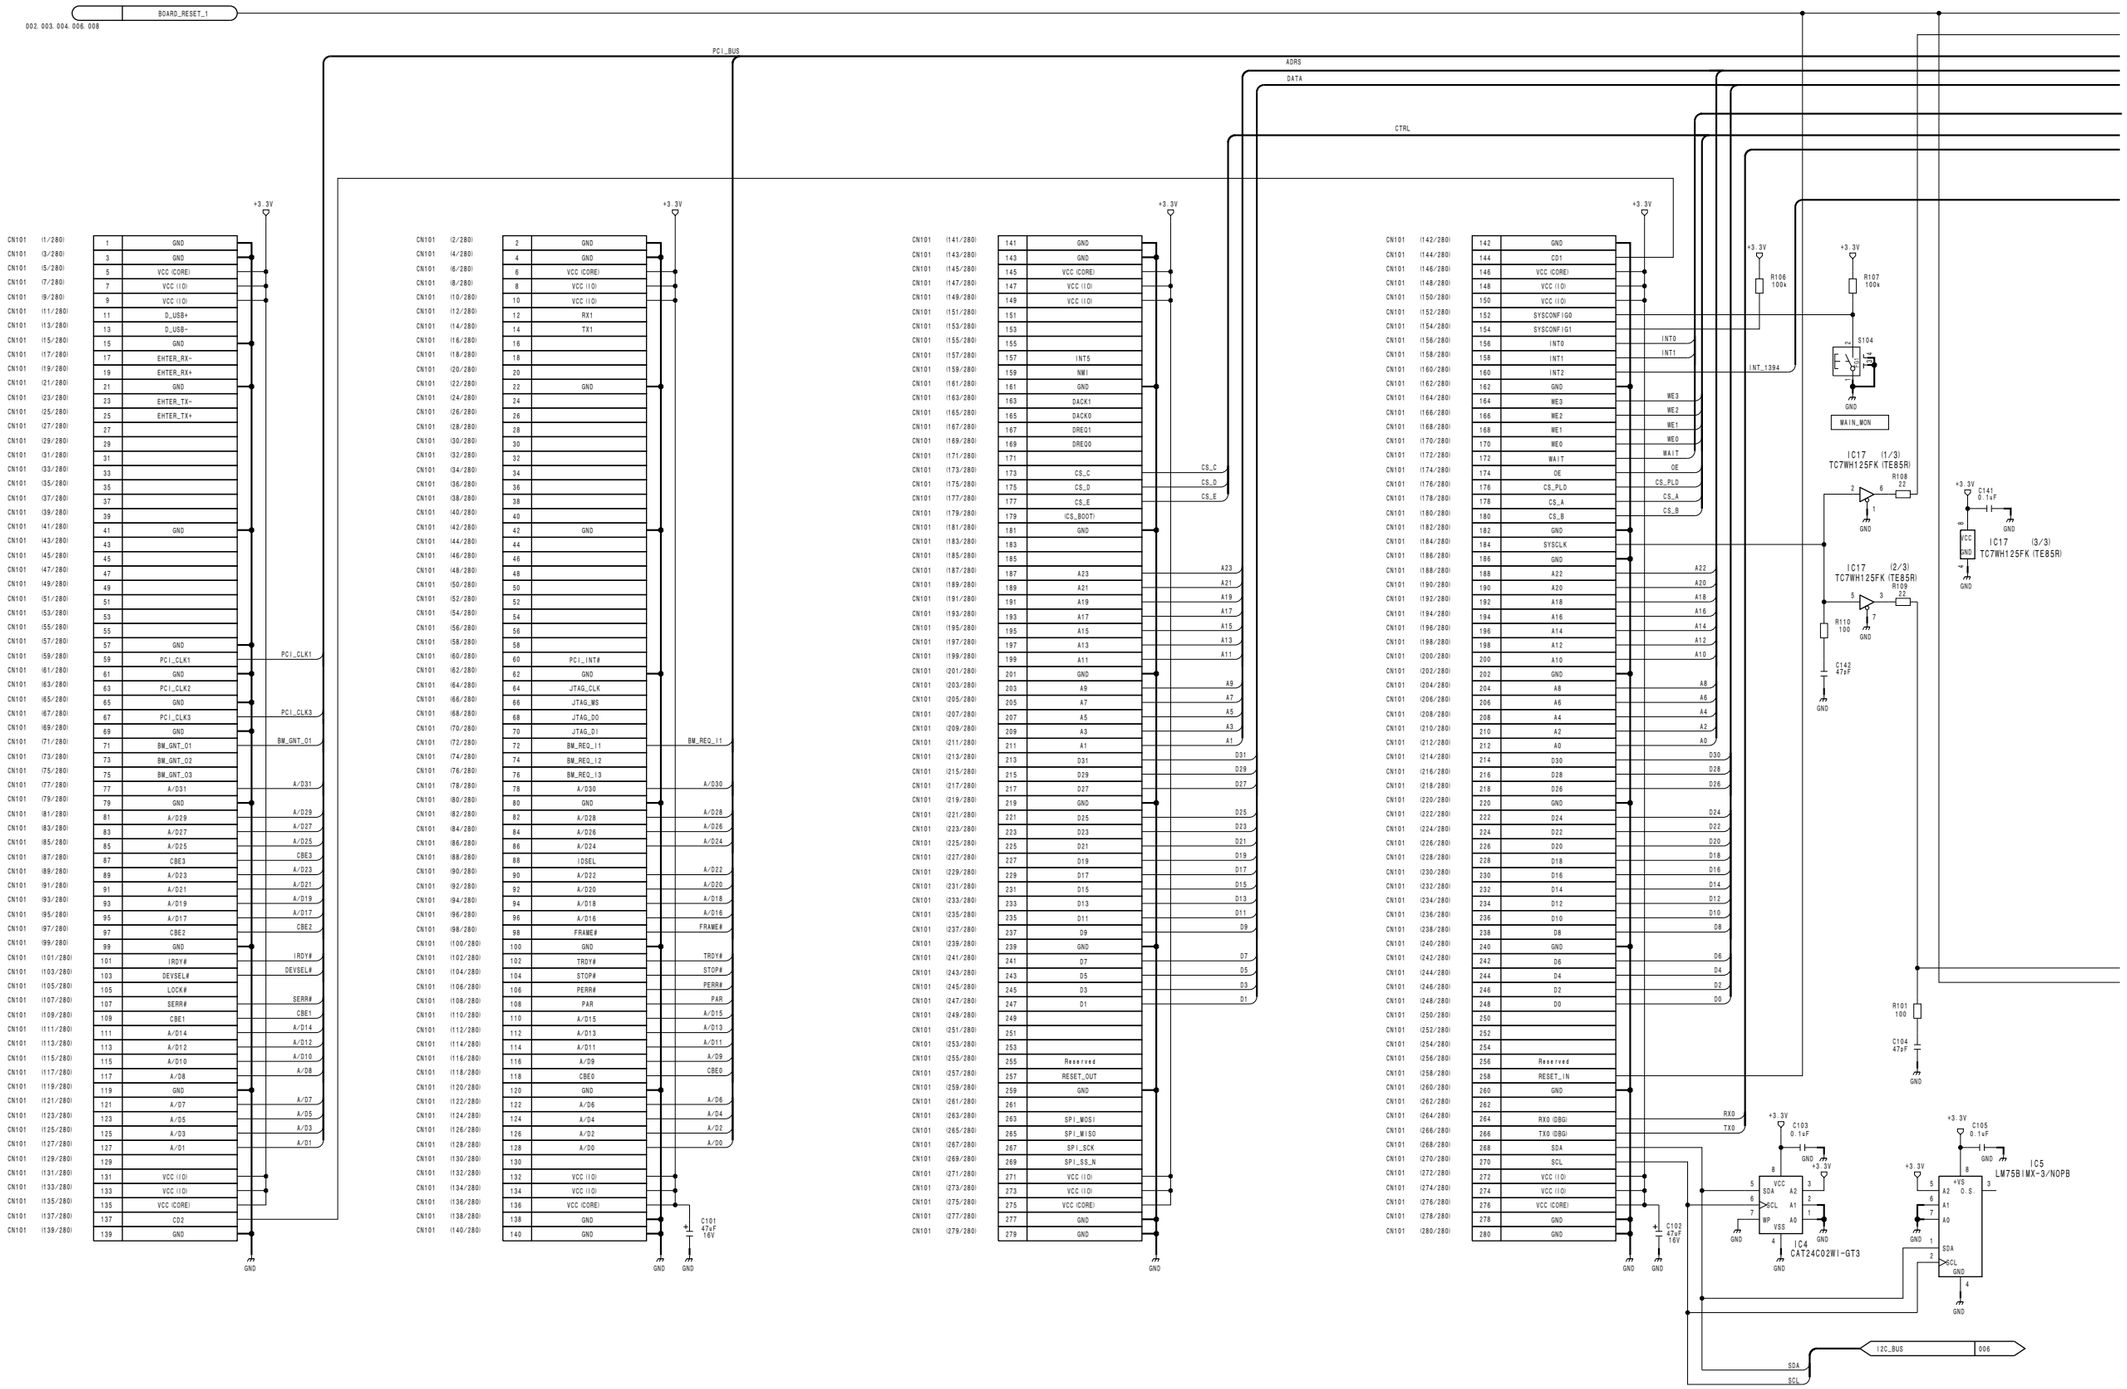

4-30

MVS-6000 MM

CA-54CFE (1/17) **SUFFIX: -24**

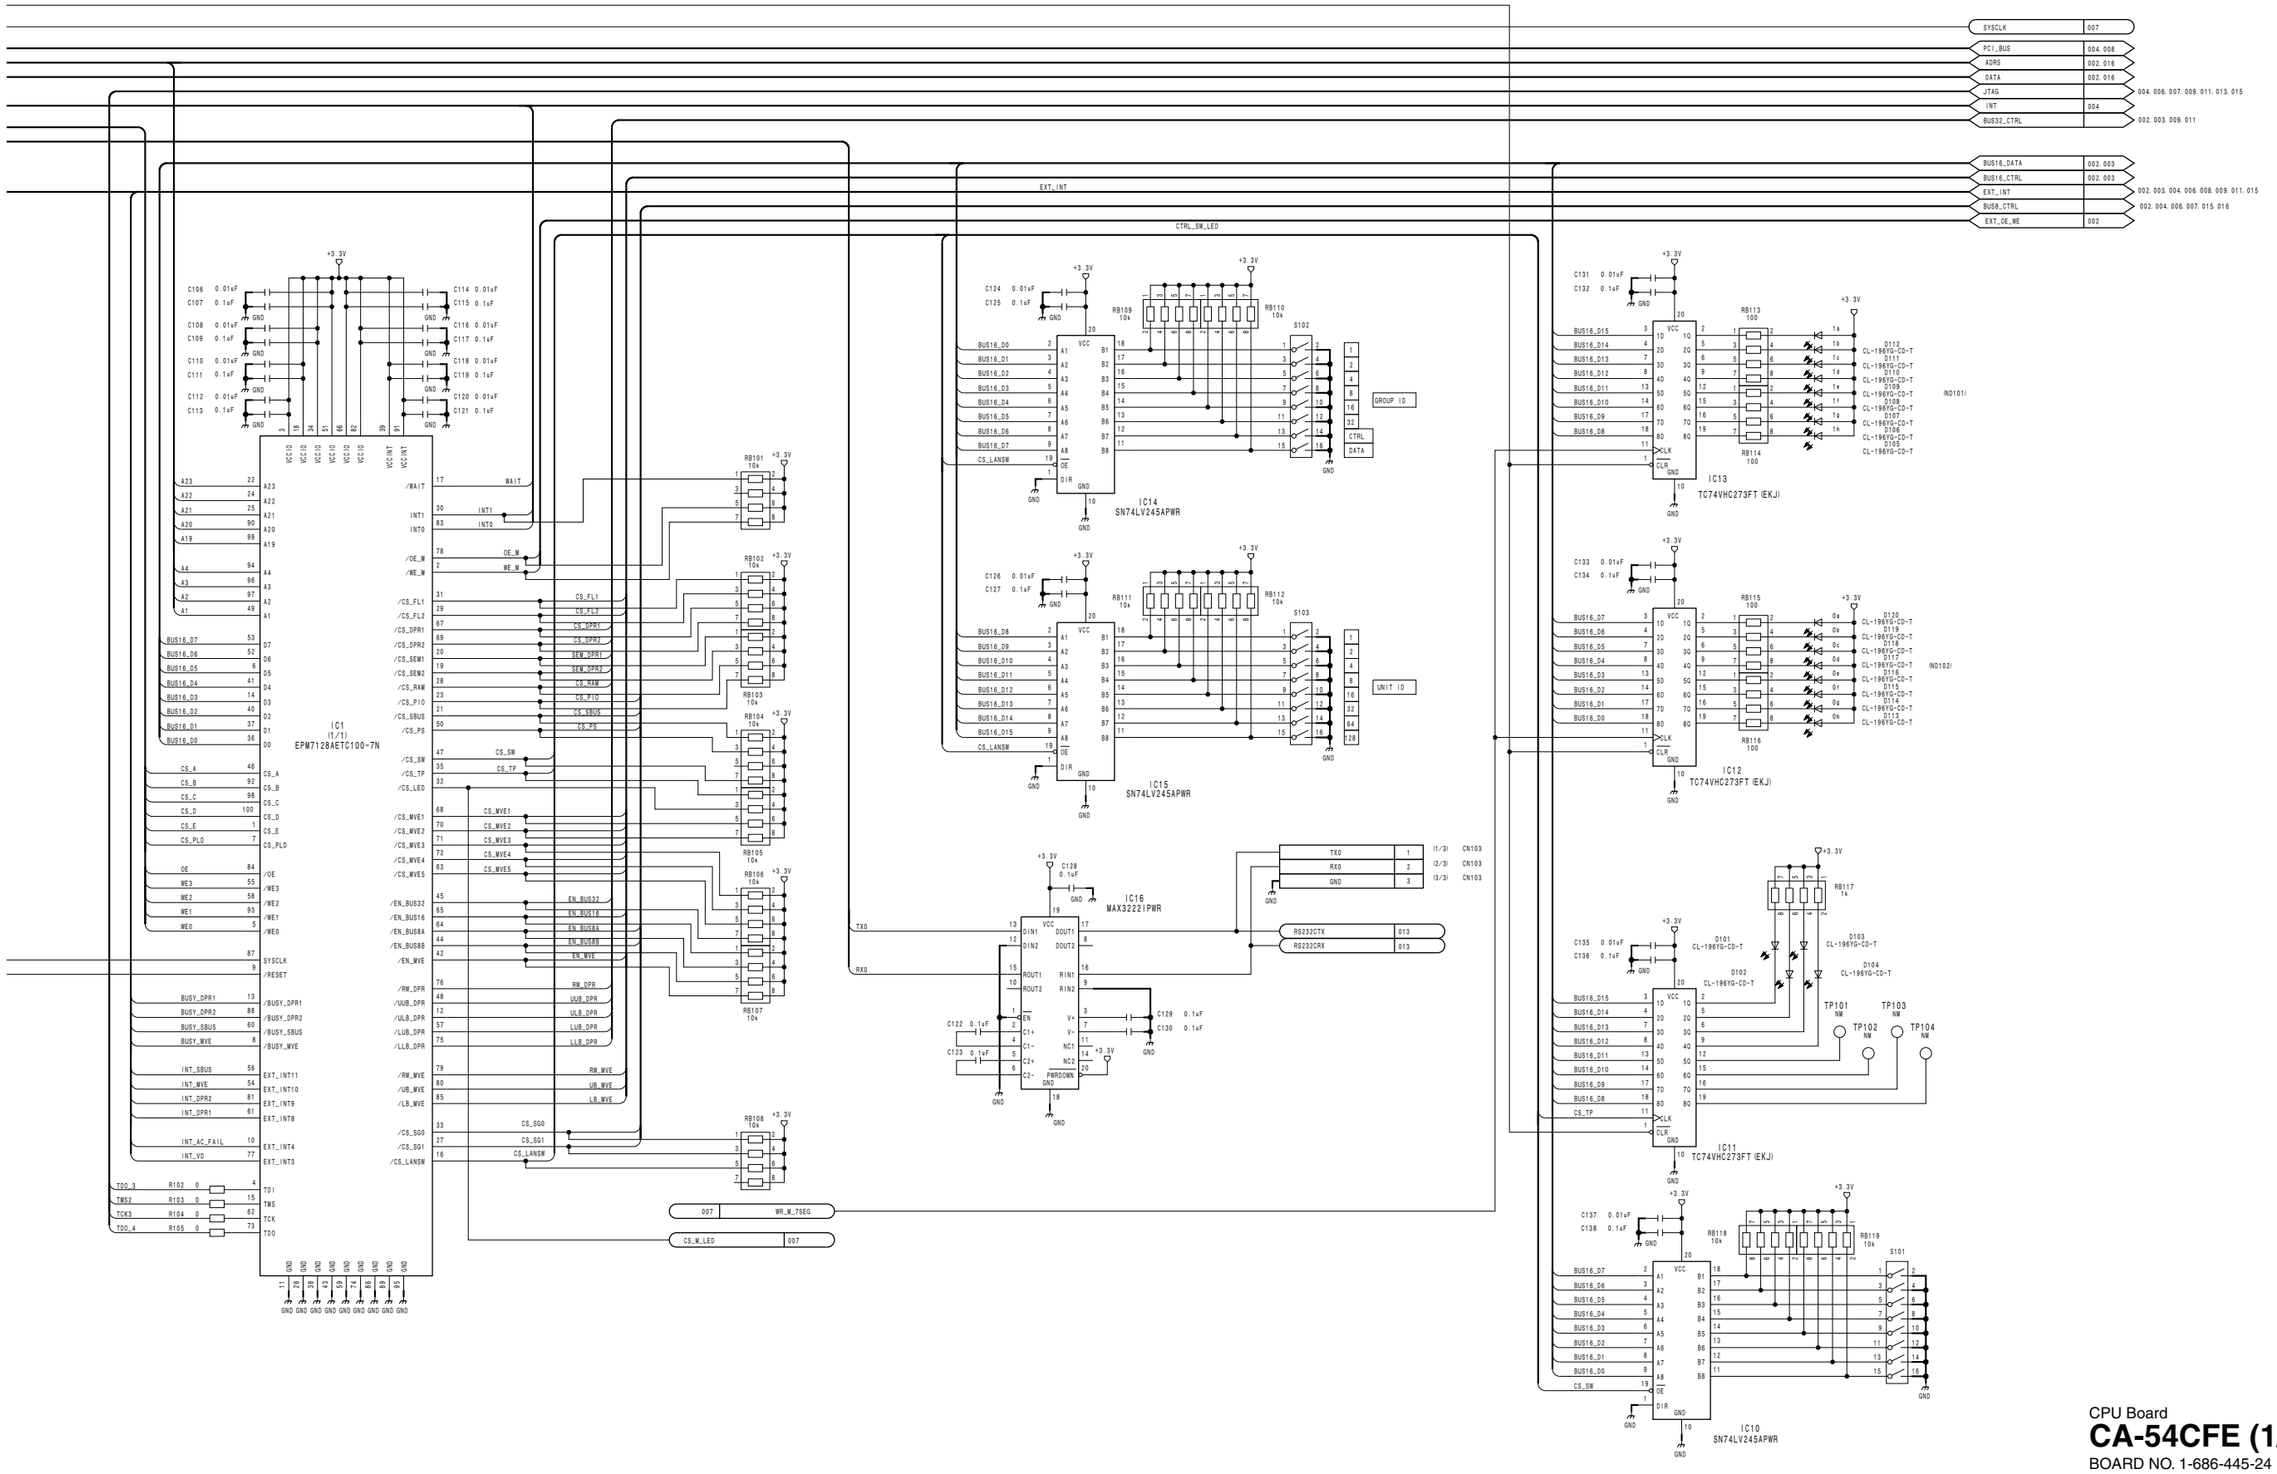

MVS-6000 MM

4-31

4-31


CPU Board

CA-54CFE (1/17)

BOARD NO. 1-686-445-24


MVS-6000_CA-54E_001_1

CA-54CFE (2/17)
SUFFIX: -24

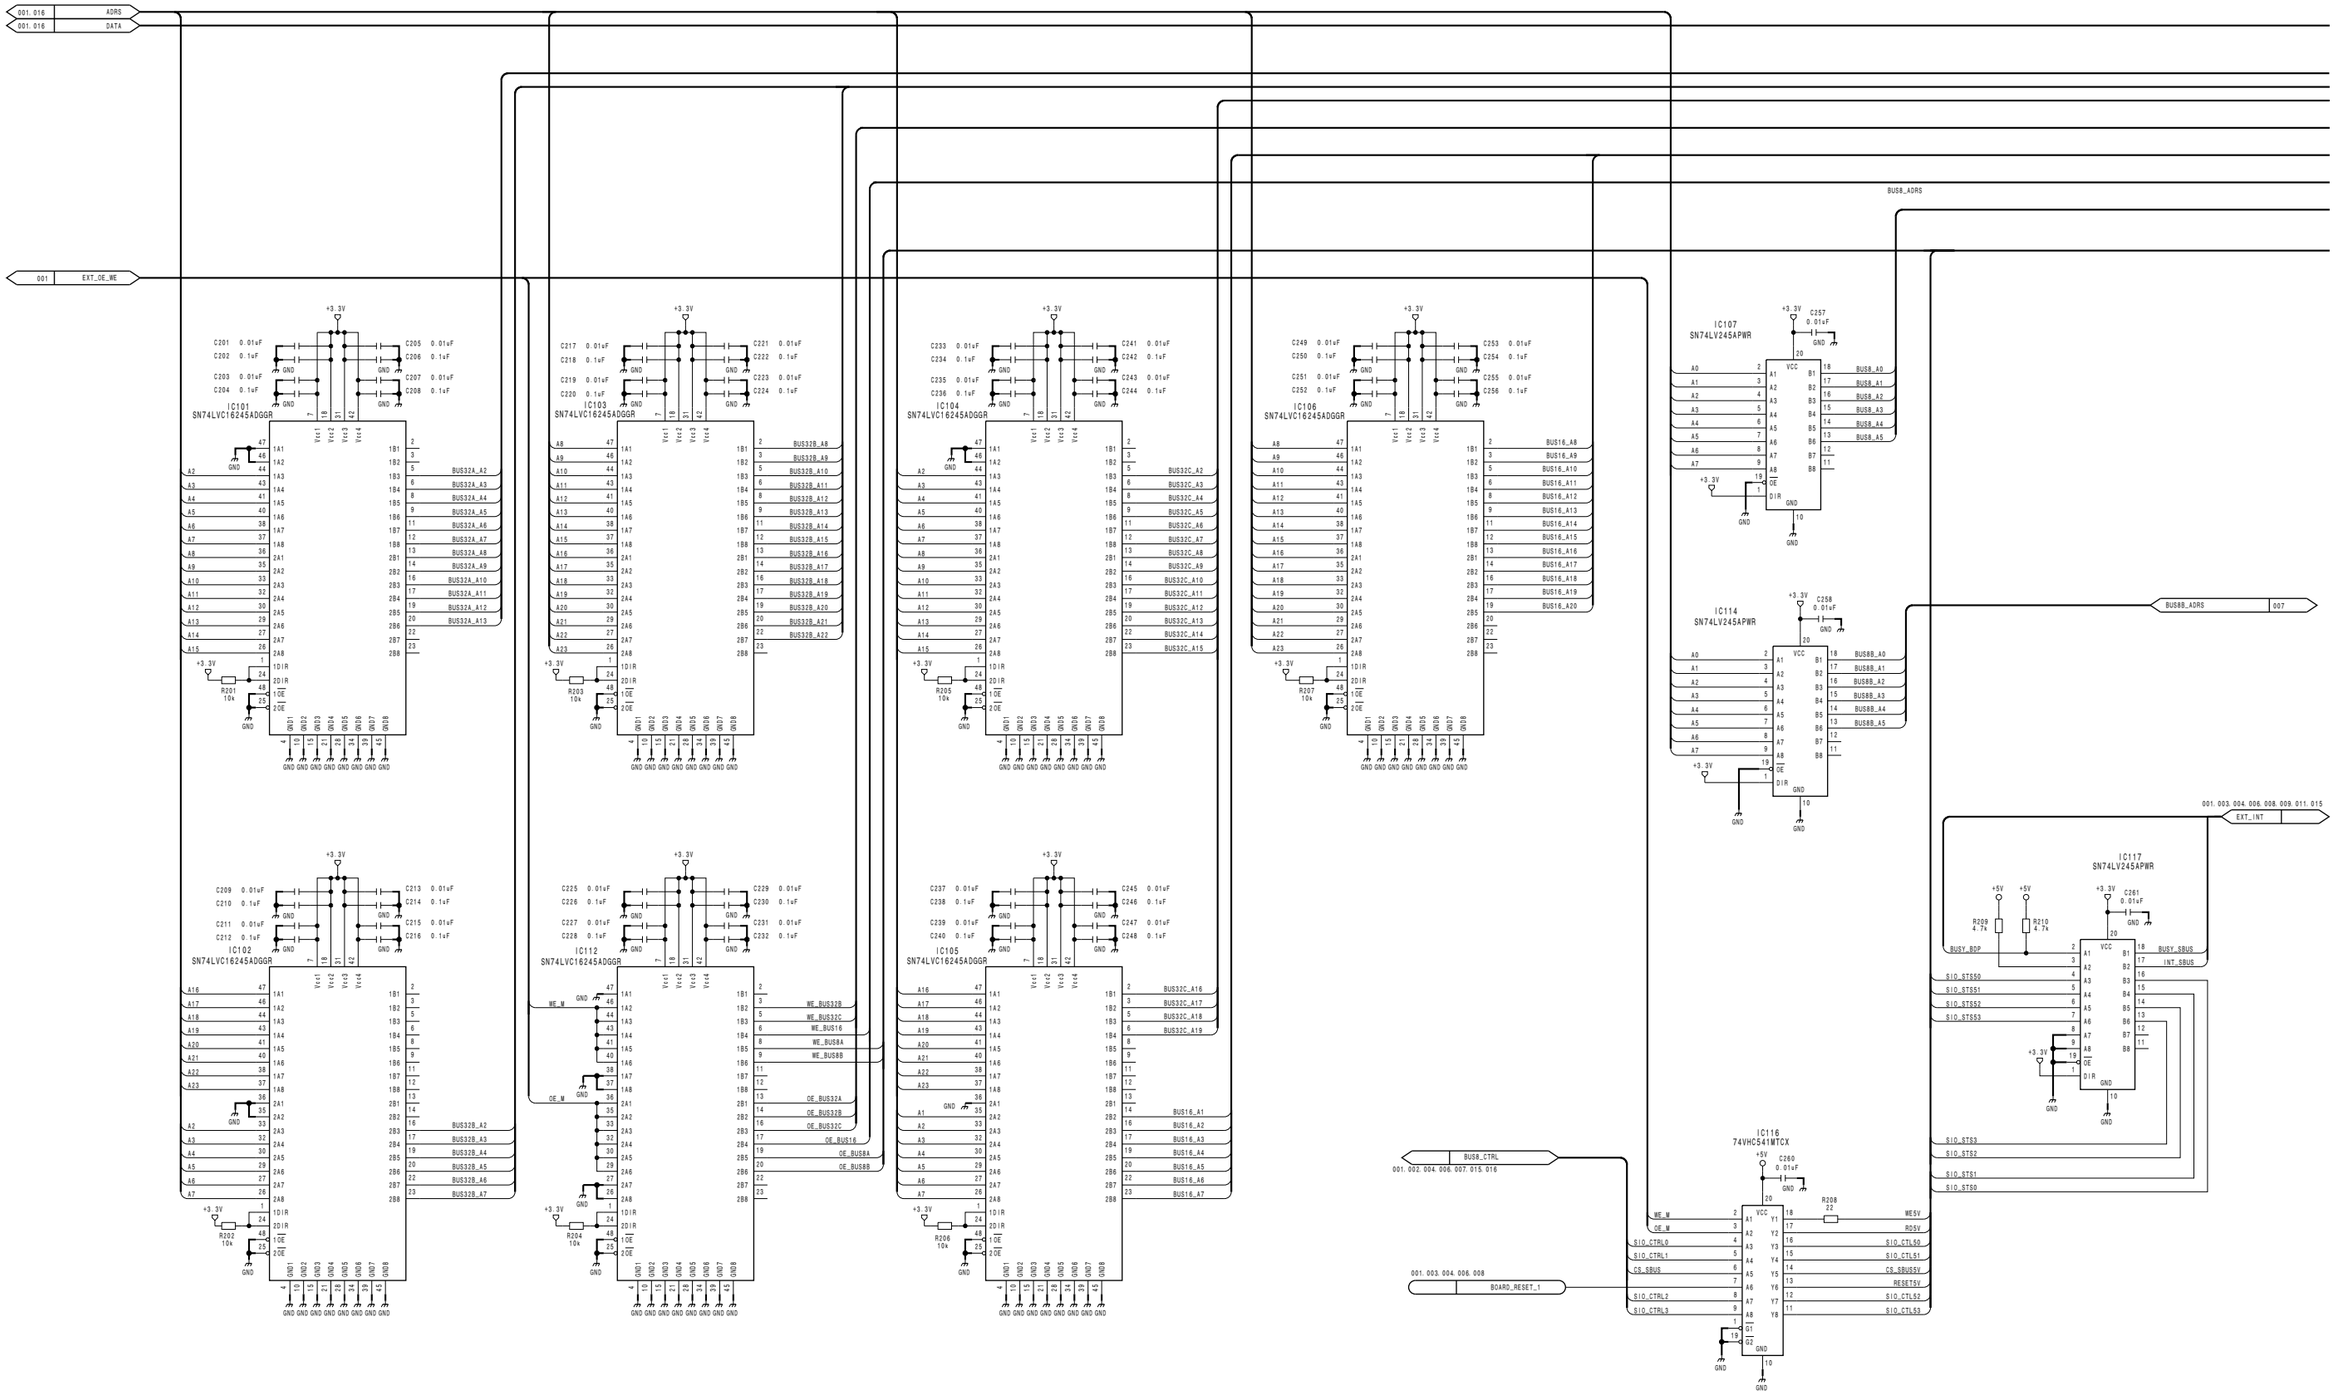


4-32


CA-54CFE (2/17)
SUFFIX: -24

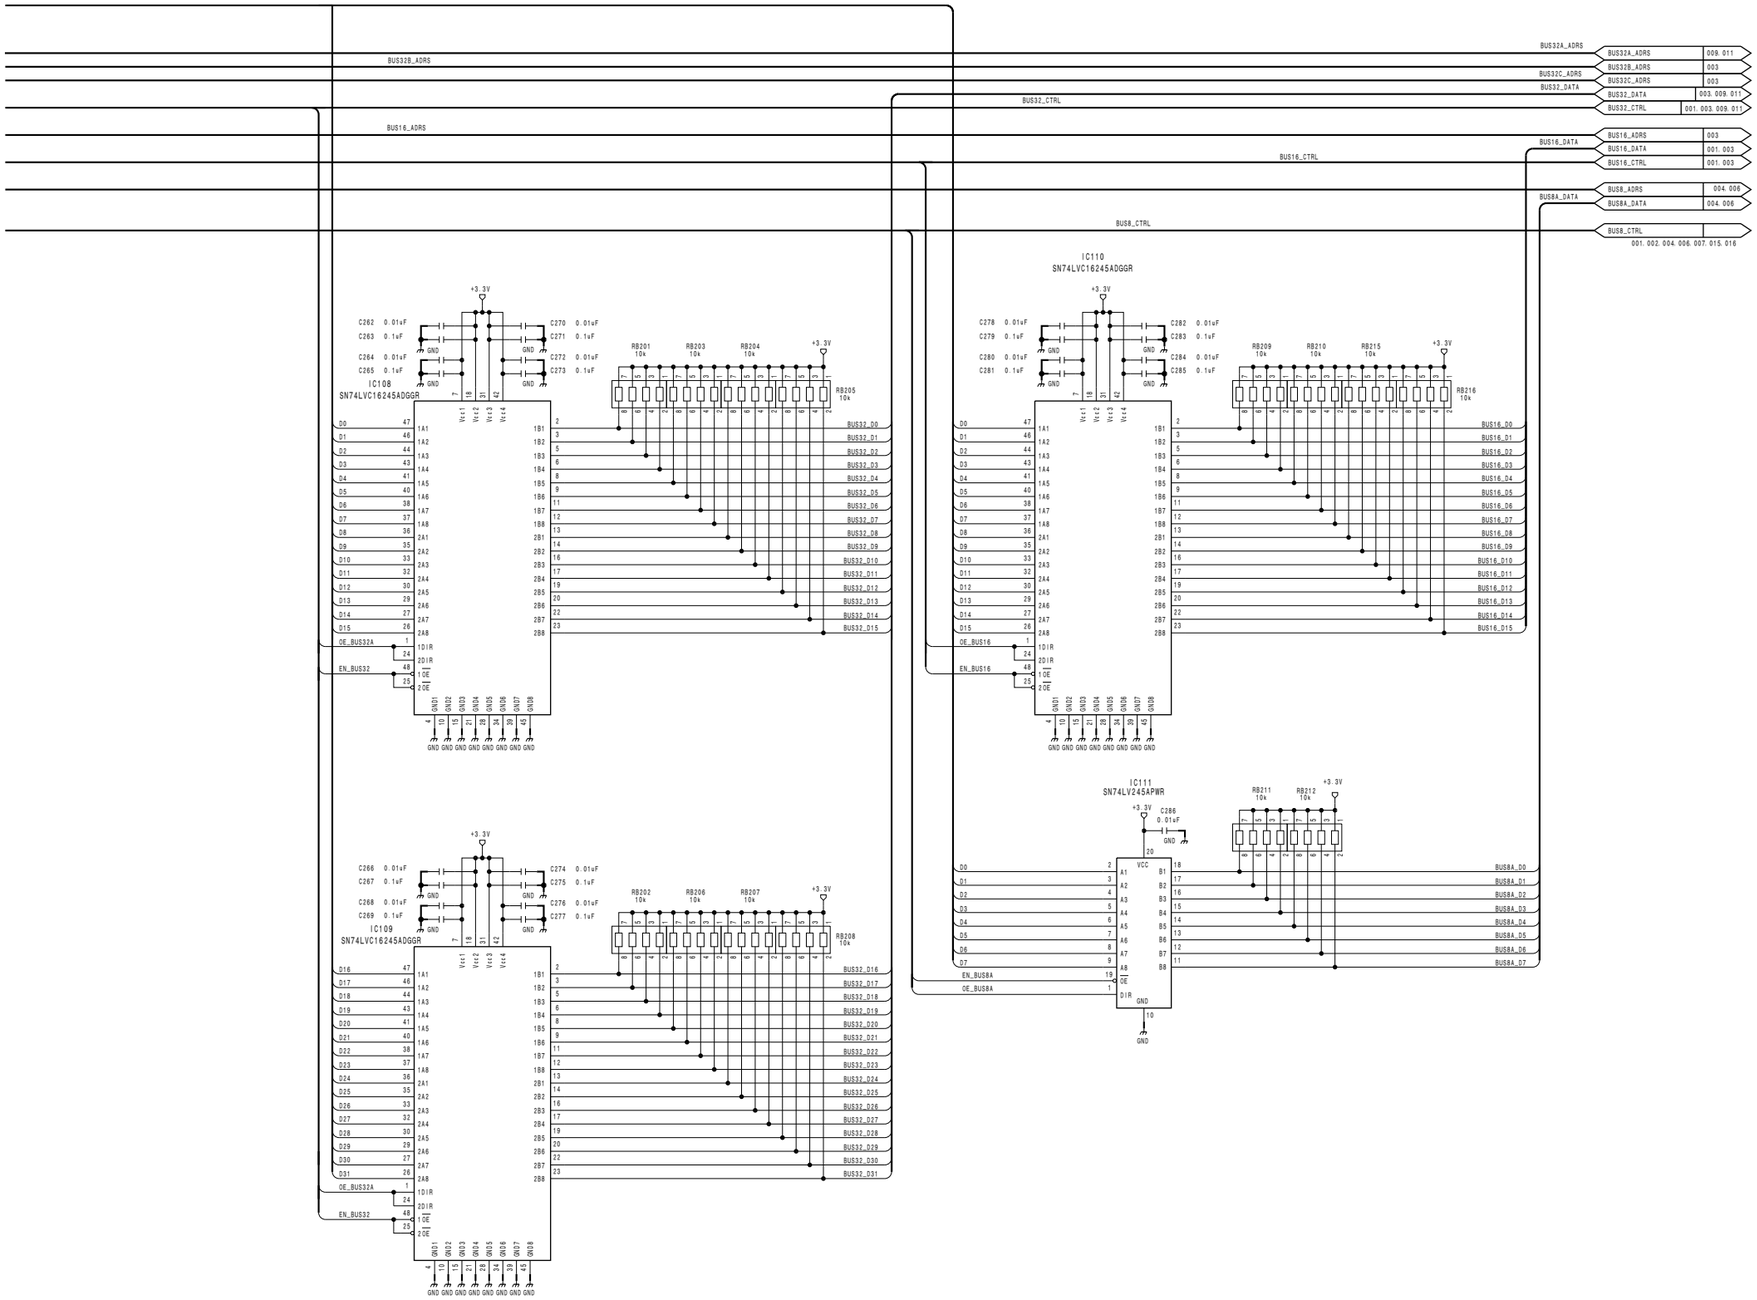


CPU Board
CA-54CFE (2/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_2

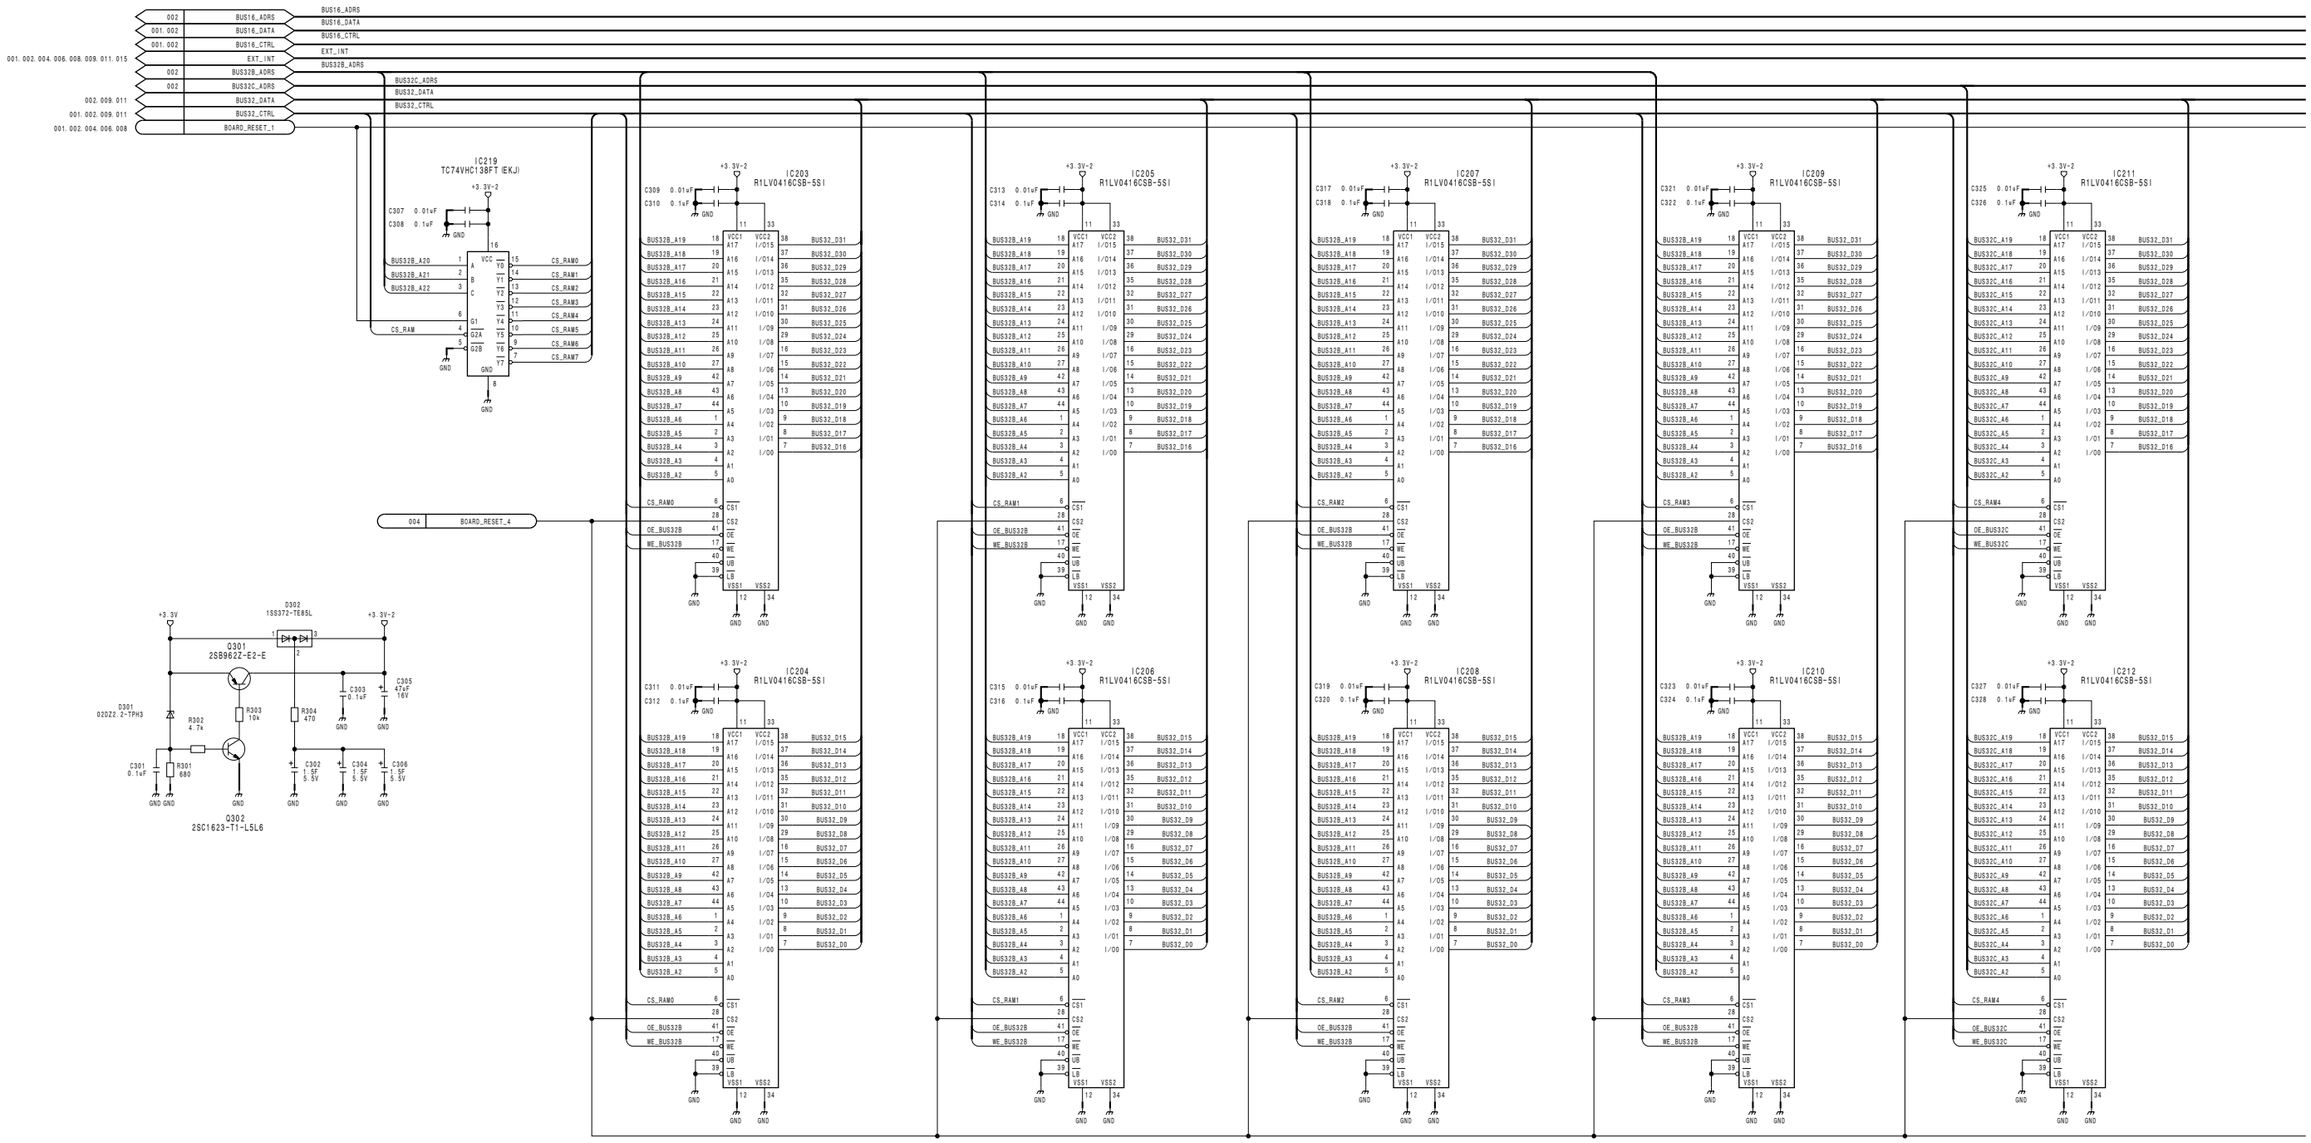
002 BUS16_ADRS
001. 002 BUS16_DATA
001. 002 BUS16_CTRL
EXT_INT
002 BUS32B_ADRS
002 BUS32C_ADRS
002. 009. 011 BUS32_DATA
001. 002. 009. 011 BUS32_CTRL
001. 002. 004. 006. 008 BOARD_RESET_1
001. 002. 004. 006. 008. 009. 011. 015
BUS16_ADRS
BUS16_DATA
BUS16_CTRL
EXT_INT
BUS32B_ADRS
BUS32C_ADRS
BUS32_DATA
BUS32_CTRL
IC219
TC74VHC138FT (EKJ)
+3.3V-2
C307 0.01uF
C308 0.1uF
GND
BUS32B_A20
BUS32B_A21
BUS32B_A22
CS_RAM
CS_RAM0
CS_RAM1
CS_RAM2
CS_RAM3
CS_RAM4
CS_RAM5
CS_RAM6
CS_RAM7
004 BOARD_RESET_4
IC203
R1LV0416CSB-5SI
IC204
IC205
IC206
IC207
IC208
IC209
IC210
IC211
IC212
C309 0.01uF
C310 0.1uF
C311 0.01uF
C312 0.1uF
C313 0.01uF
C314 0.1uF
C315 0.01uF
C316 0.1uF
C317 0.01uF
C318 0.1uF
C319 0.01uF
C320 0.1uF
C321 0.01uF
C322 0.1uF
C323 0.01uF
C324 0.1uF
C325 0.01uF
C326 0.1uF
C327 0.01uF
C328 0.1uF
BUS32B_A19
BUS32B_A18
BUS32B_A17
BUS32B_A16
BUS32B_A15
BUS32B_A14
BUS32B_A13
BUS32B_A12
BUS32B_A11
BUS32B_A10
BUS32B_A9
BUS32B_A8
BUS32B_A7
BUS32B_A6
BUS32B_A5
BUS32B_A4
BUS32B_A3
BUS32B_A2
BUS32C_A19
BUS32C_A18
BUS32C_A17
BUS32C_A16
BUS32C_A15
BUS32C_A14
BUS32C_A13
BUS32C_A12
BUS32C_A11
BUS32C_A10
BUS32C_A9
BUS32C_A8
BUS32C_A7
BUS32C_A6
BUS32C_A5
BUS32C_A4
BUS32C_A3
BUS32C_A2
BUS32_D31
BUS32_D30
BUS32_D29
BUS32_D28
BUS32_D27
BUS32_D26
BUS32_D25
BUS32_D24
BUS32_D23
BUS32_D22
BUS32_D21
BUS32_D20
BUS32_D19
BUS32_D18
BUS32_D17
BUS32_D16
BUS32_D15
BUS32_D14
BUS32_D13
BUS32_D12
BUS32_D11
BUS32_D10
BUS32_D9
BUS32_D8
BUS32_D7
BUS32_D6
BUS32_D5
BUS32_D4
BUS32_D3
BUS32_D2
BUS32_D1
BUS32_D0
CS_RAM0
CS_RAM1
CS_RAM2
CS_RAM3
CS_RAM4
OE_BUS32B
WE_BUS32B
OE_BUS32C
WE_BUS32C
D302
1SS372-TE85L
Q301
2SB962Z-E2-E
D301
02DZ2.2-TPH3
R302 4.7k
R303 10k
R304 470
R301 680
C301 0.1uF
C303 0.1uF
C305 47uF 16V
C302 1.5F 5.5V
C304 1.5F 5.5V
C306 1.5F 5.5V
Q302
2SC1623-T1-L5L6


CA-54CFE (3/17)
SUFFIX: -24

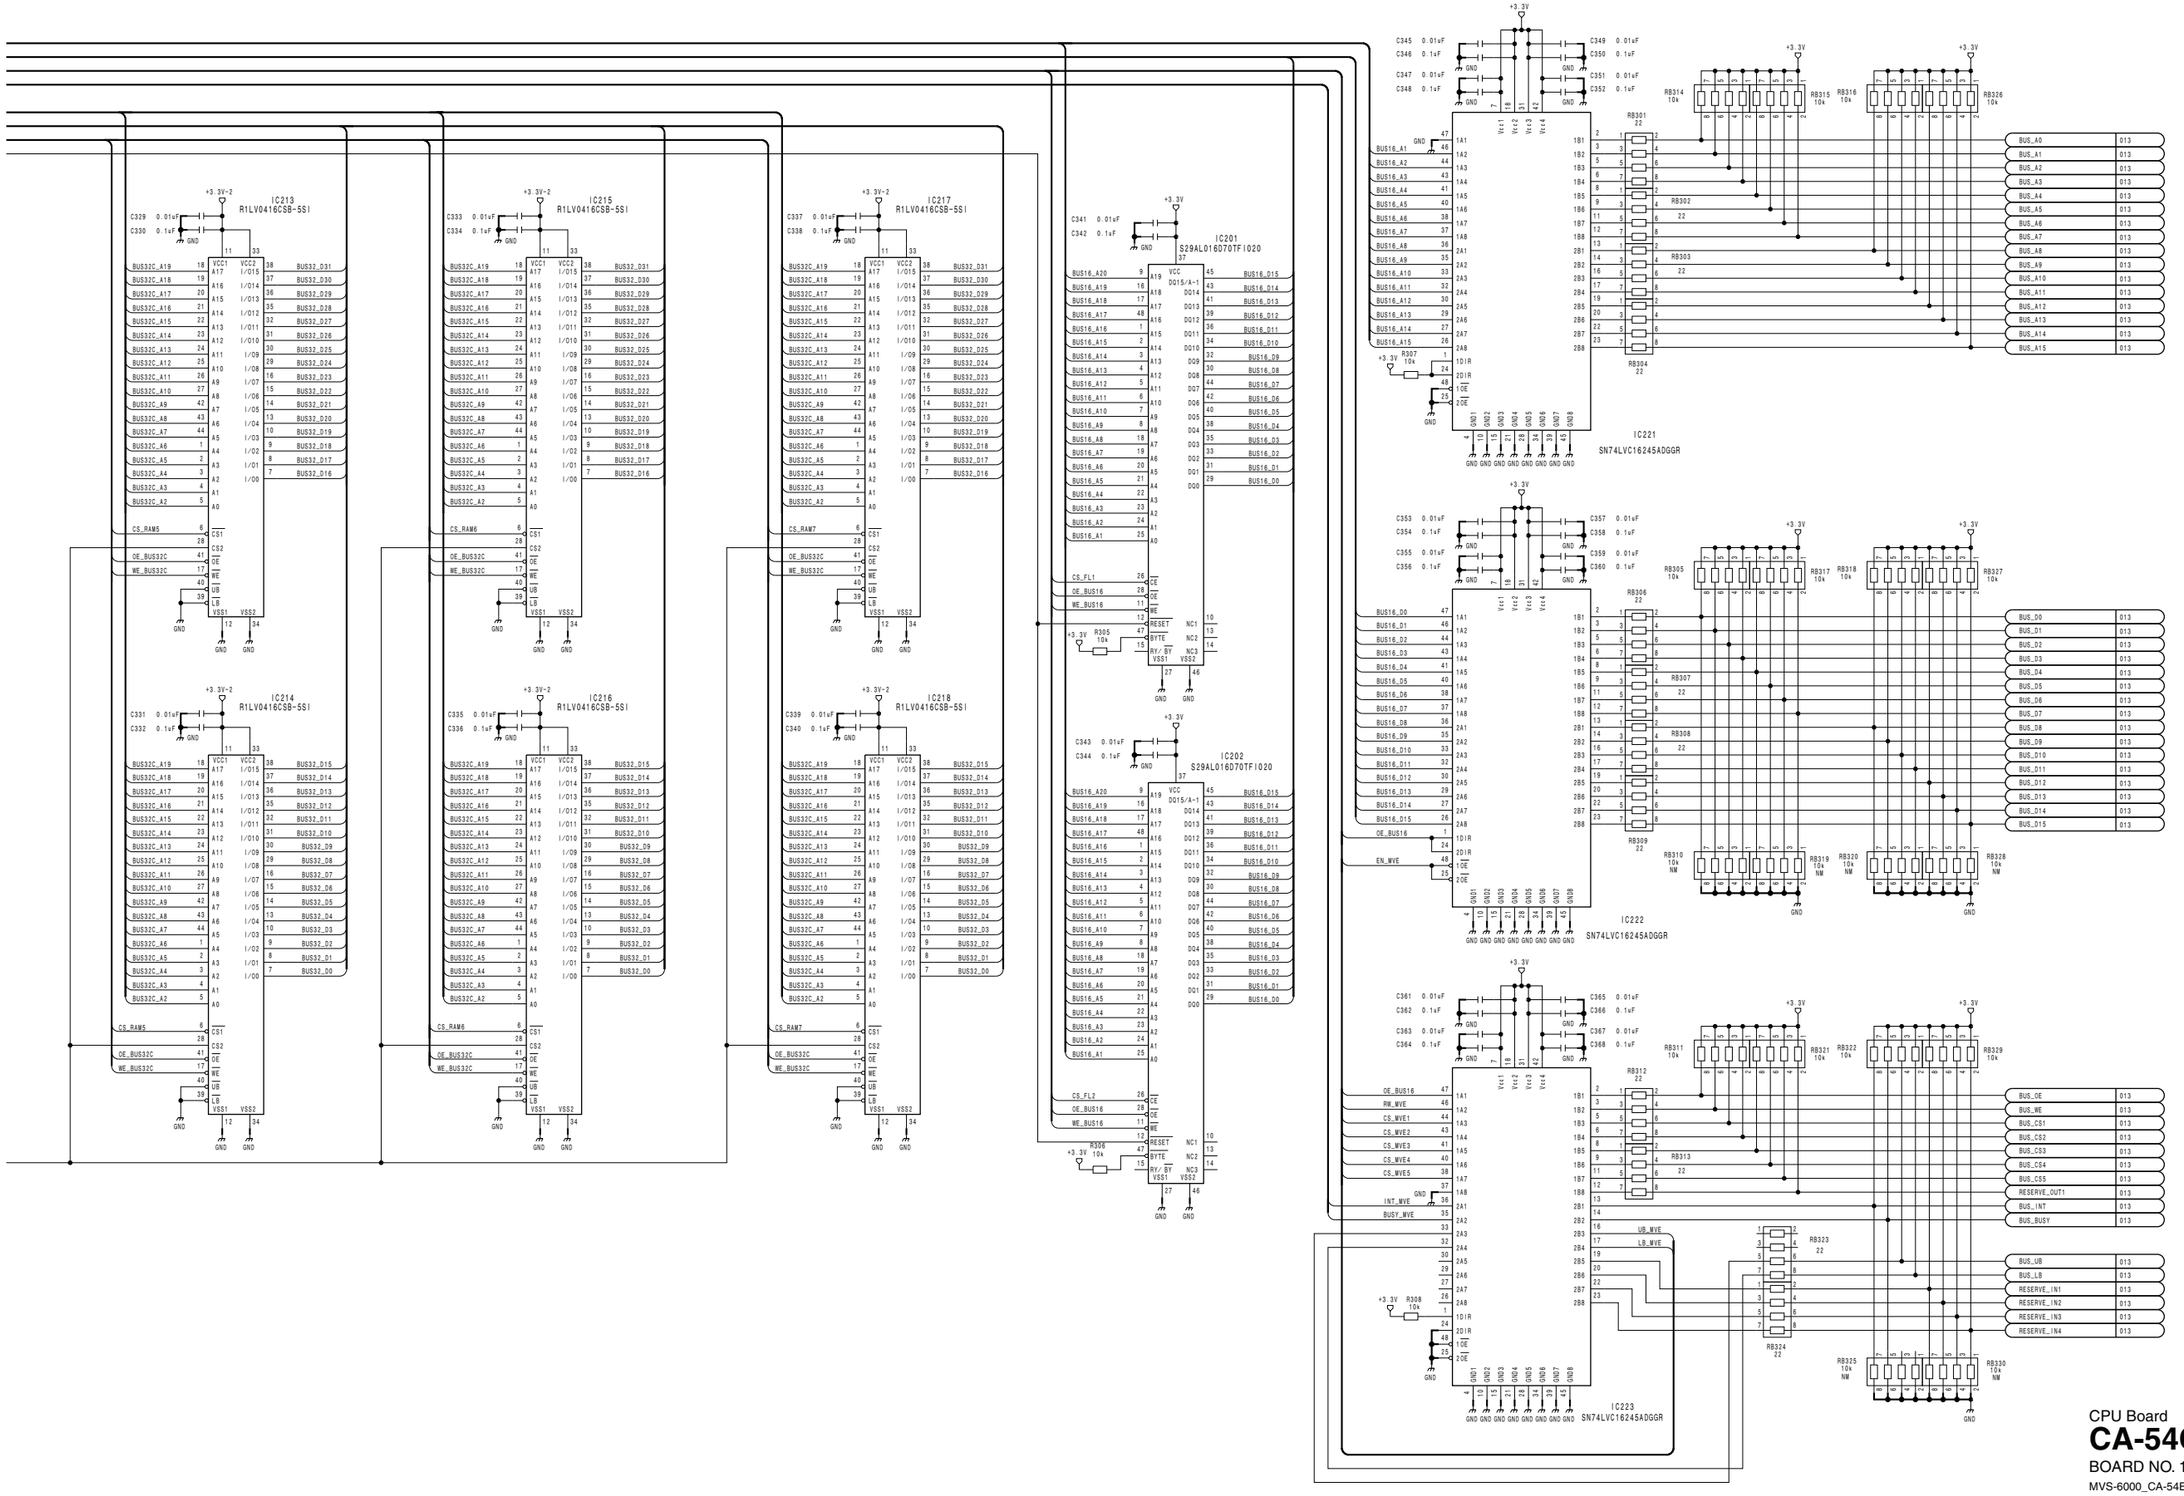

CPU Board
CA-54CFE (3/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_3

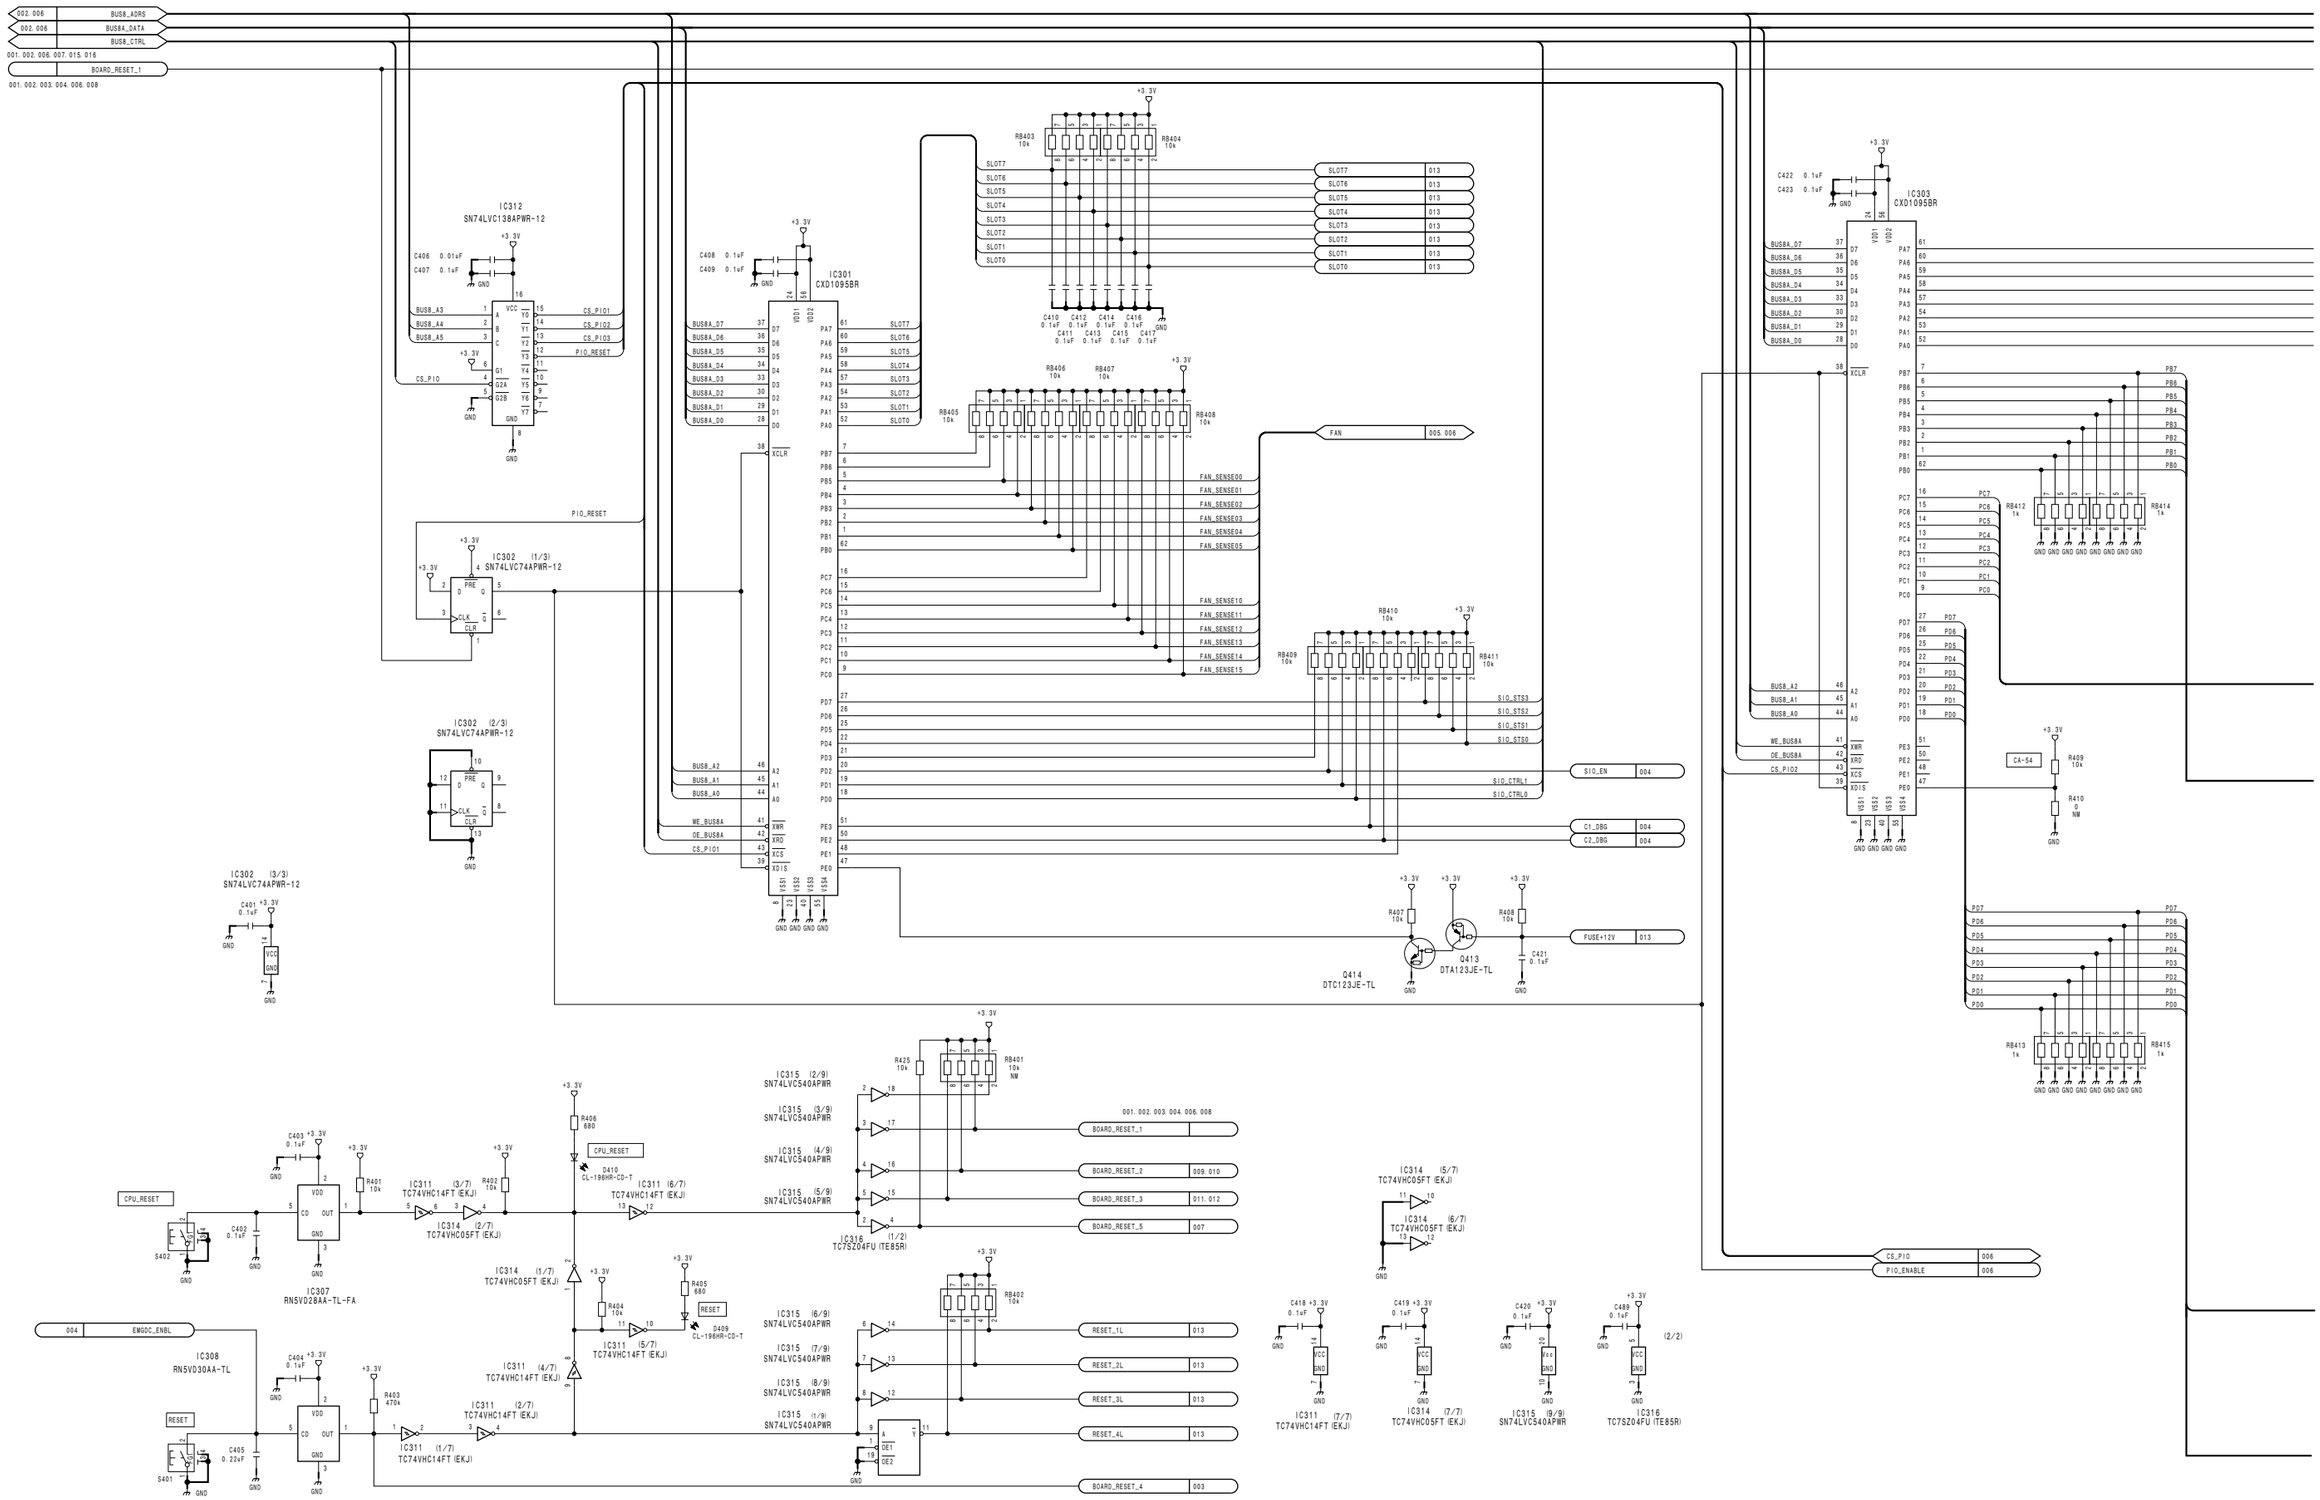
002. 006 BUS8_ADRS
002. 006 BUS8_DATA
BUS8_CTRL
001. 002. 006. 007. 015. 016
BOARD_RESET_1
001. 002. 003. 004. 006. 008
IC312
SN74LVC138APWR-12
IC301
CXD1095BR
IC303
CXD1095BR
IC302 (1/3)
SN74LVC74APWR-12
IC302 (2/3)
SN74LVC74APWR-12
IC302 (3/3)
SN74LVC74APWR-12
IC307
RN5VD28AA-TL-FA
IC308
RN5VD30AA-TL
IC311 (1/7) TC74VHC14FT (EKJ)
IC311 (2/7) TC74VHC14FT (EKJ)
IC311 (3/7) TC74VHC14FT (EKJ)
IC311 (4/7) TC74VHC14FT (EKJ)
IC311 (5/7) TC74VHC14FT (EKJ)
IC311 (6/7) TC74VHC14FT (EKJ)
IC311 (7/7) TC74VHC14FT (EKJ)
IC314 (1/7) TC74VHC05FT (EKJ)
IC314 (2/7) TC74VHC05FT (EKJ)
IC314 (5/7) TC74VHC05FT (EKJ)
IC314 (6/7) TC74VHC05FT (EKJ)
IC314 (7/7) TC74VHC05FT (EKJ)
IC315 (1/9) SN74LVC540APWR
IC315 (2/9) SN74LVC540APWR
IC315 (3/9) SN74LVC540APWR
IC315 (4/9) SN74LVC540APWR
IC315 (5/9) SN74LVC540APWR
IC315 (6/9) SN74LVC540APWR
IC315 (7/9) SN74LVC540APWR
IC315 (8/9) SN74LVC540APWR
IC315 (9/9) SN74LVC540APWR
IC316 TC7SZ04FU (TE85R)
Q413 DTA123JE-TL
Q414 DTC123JE-TL
FAN 005. 006
SIO_EN 004
C1_DBG 004
C2_DBG 004
FUSE+12V 013
CS_PIO 006
PIO_ENABLE 006
BOARD_RESET_1 001. 002. 003. 004. 006. 008
BOARD_RESET_2 009. 010
BOARD_RESET_3 011. 012
BOARD_RESET_5 007
BOARD_RESET_4 003
RESET_1L 013
RESET_2L 013
RESET_3L 013
RESET_4L 013
CPU_RESET
RESET
PIO_RESET
EWDOG_ENBL 004
CA-54
(2/2)

CA-54CFE (4/17) **SUFFIX: -24**

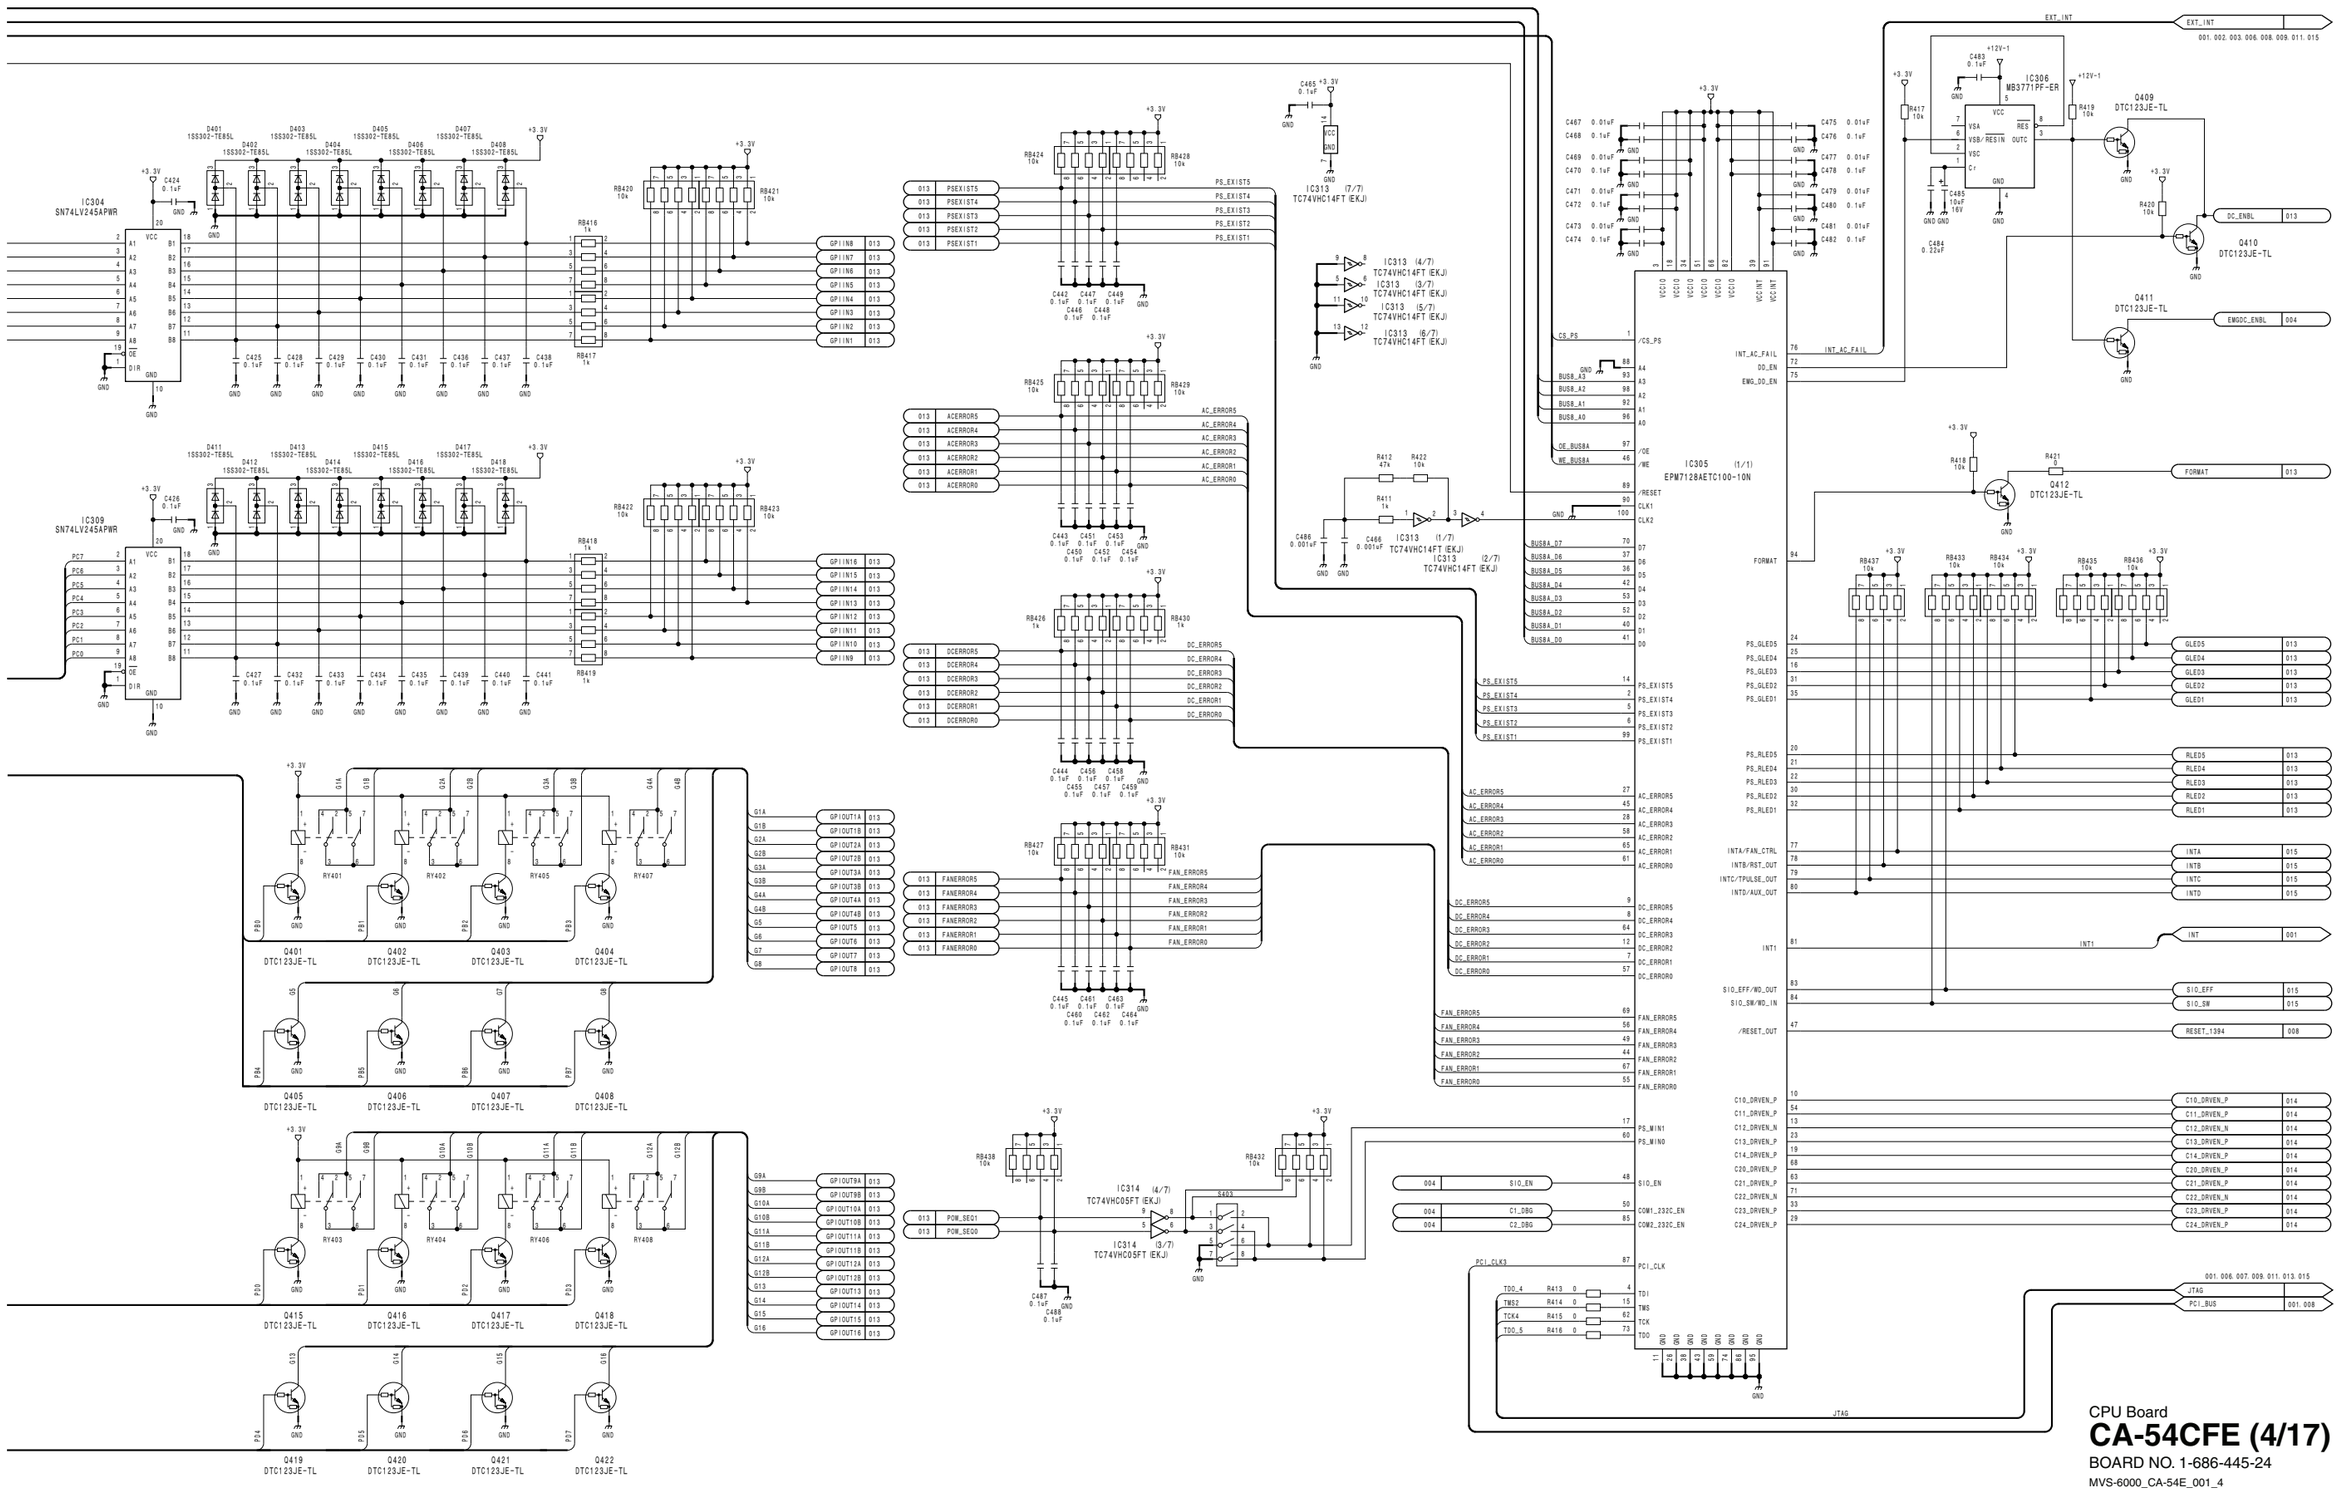


CPU Board

CA-54CFE (4/17)


BOARD NO. 1-686-445-24


MVS-6000_CA-54E_001_4

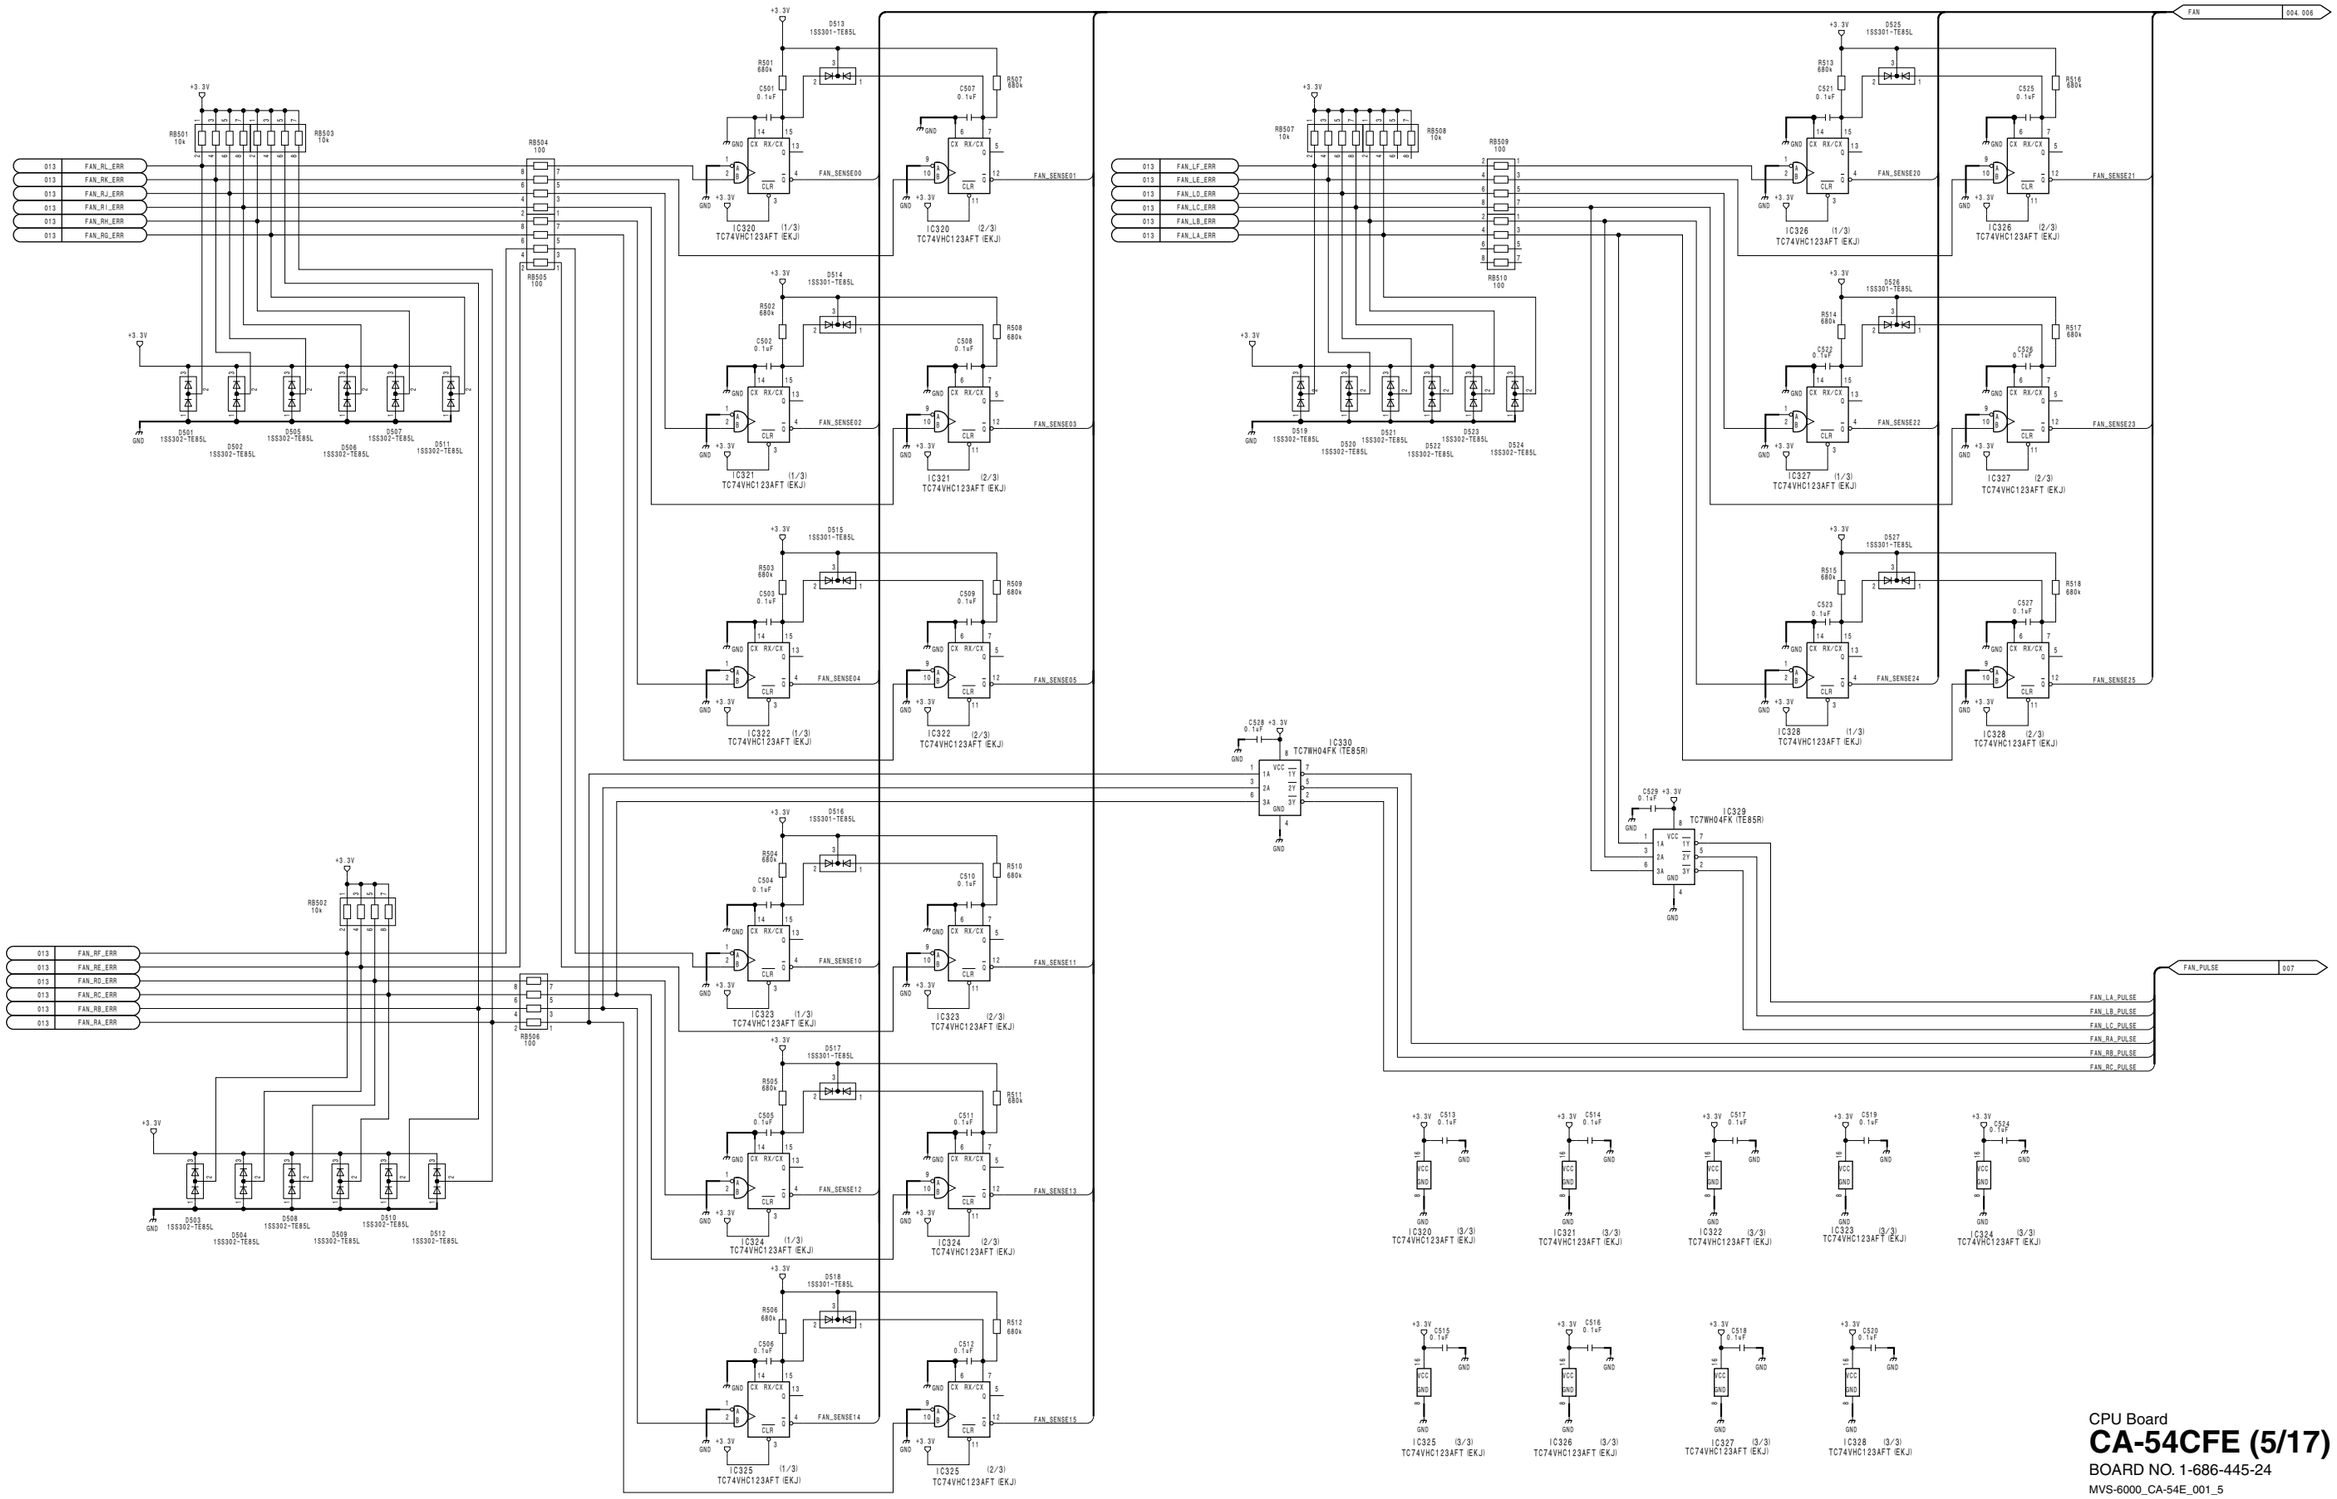

CPU Board
CA-54CFE (5/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_5


CA-54CFE (6/17)
SUFFIX: -24

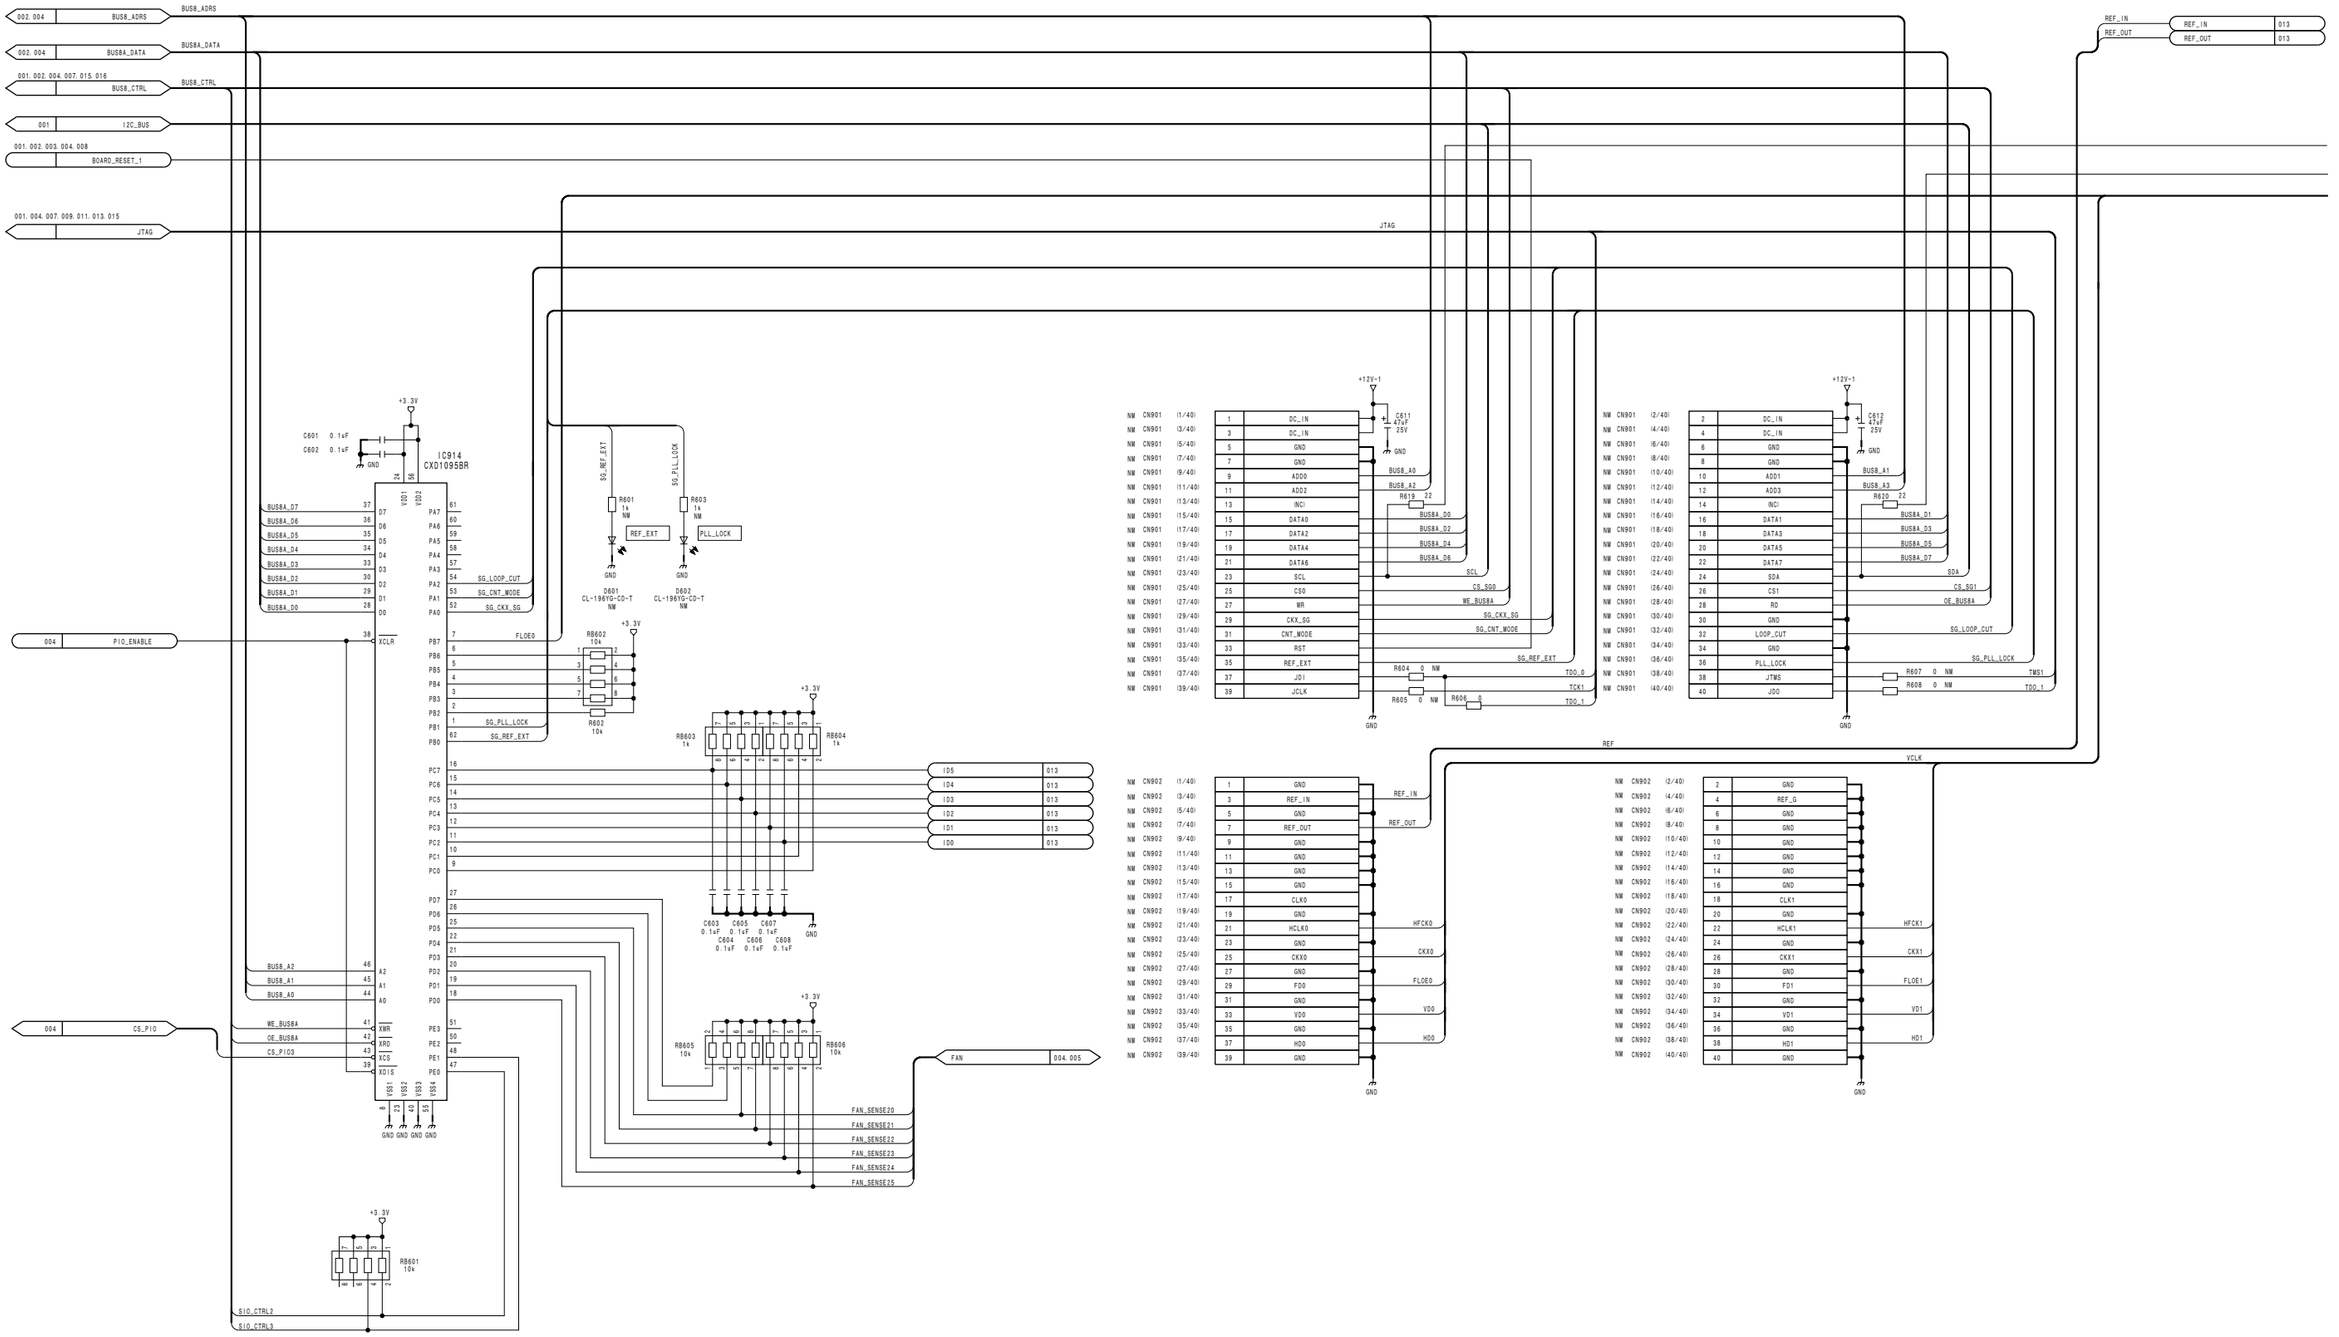

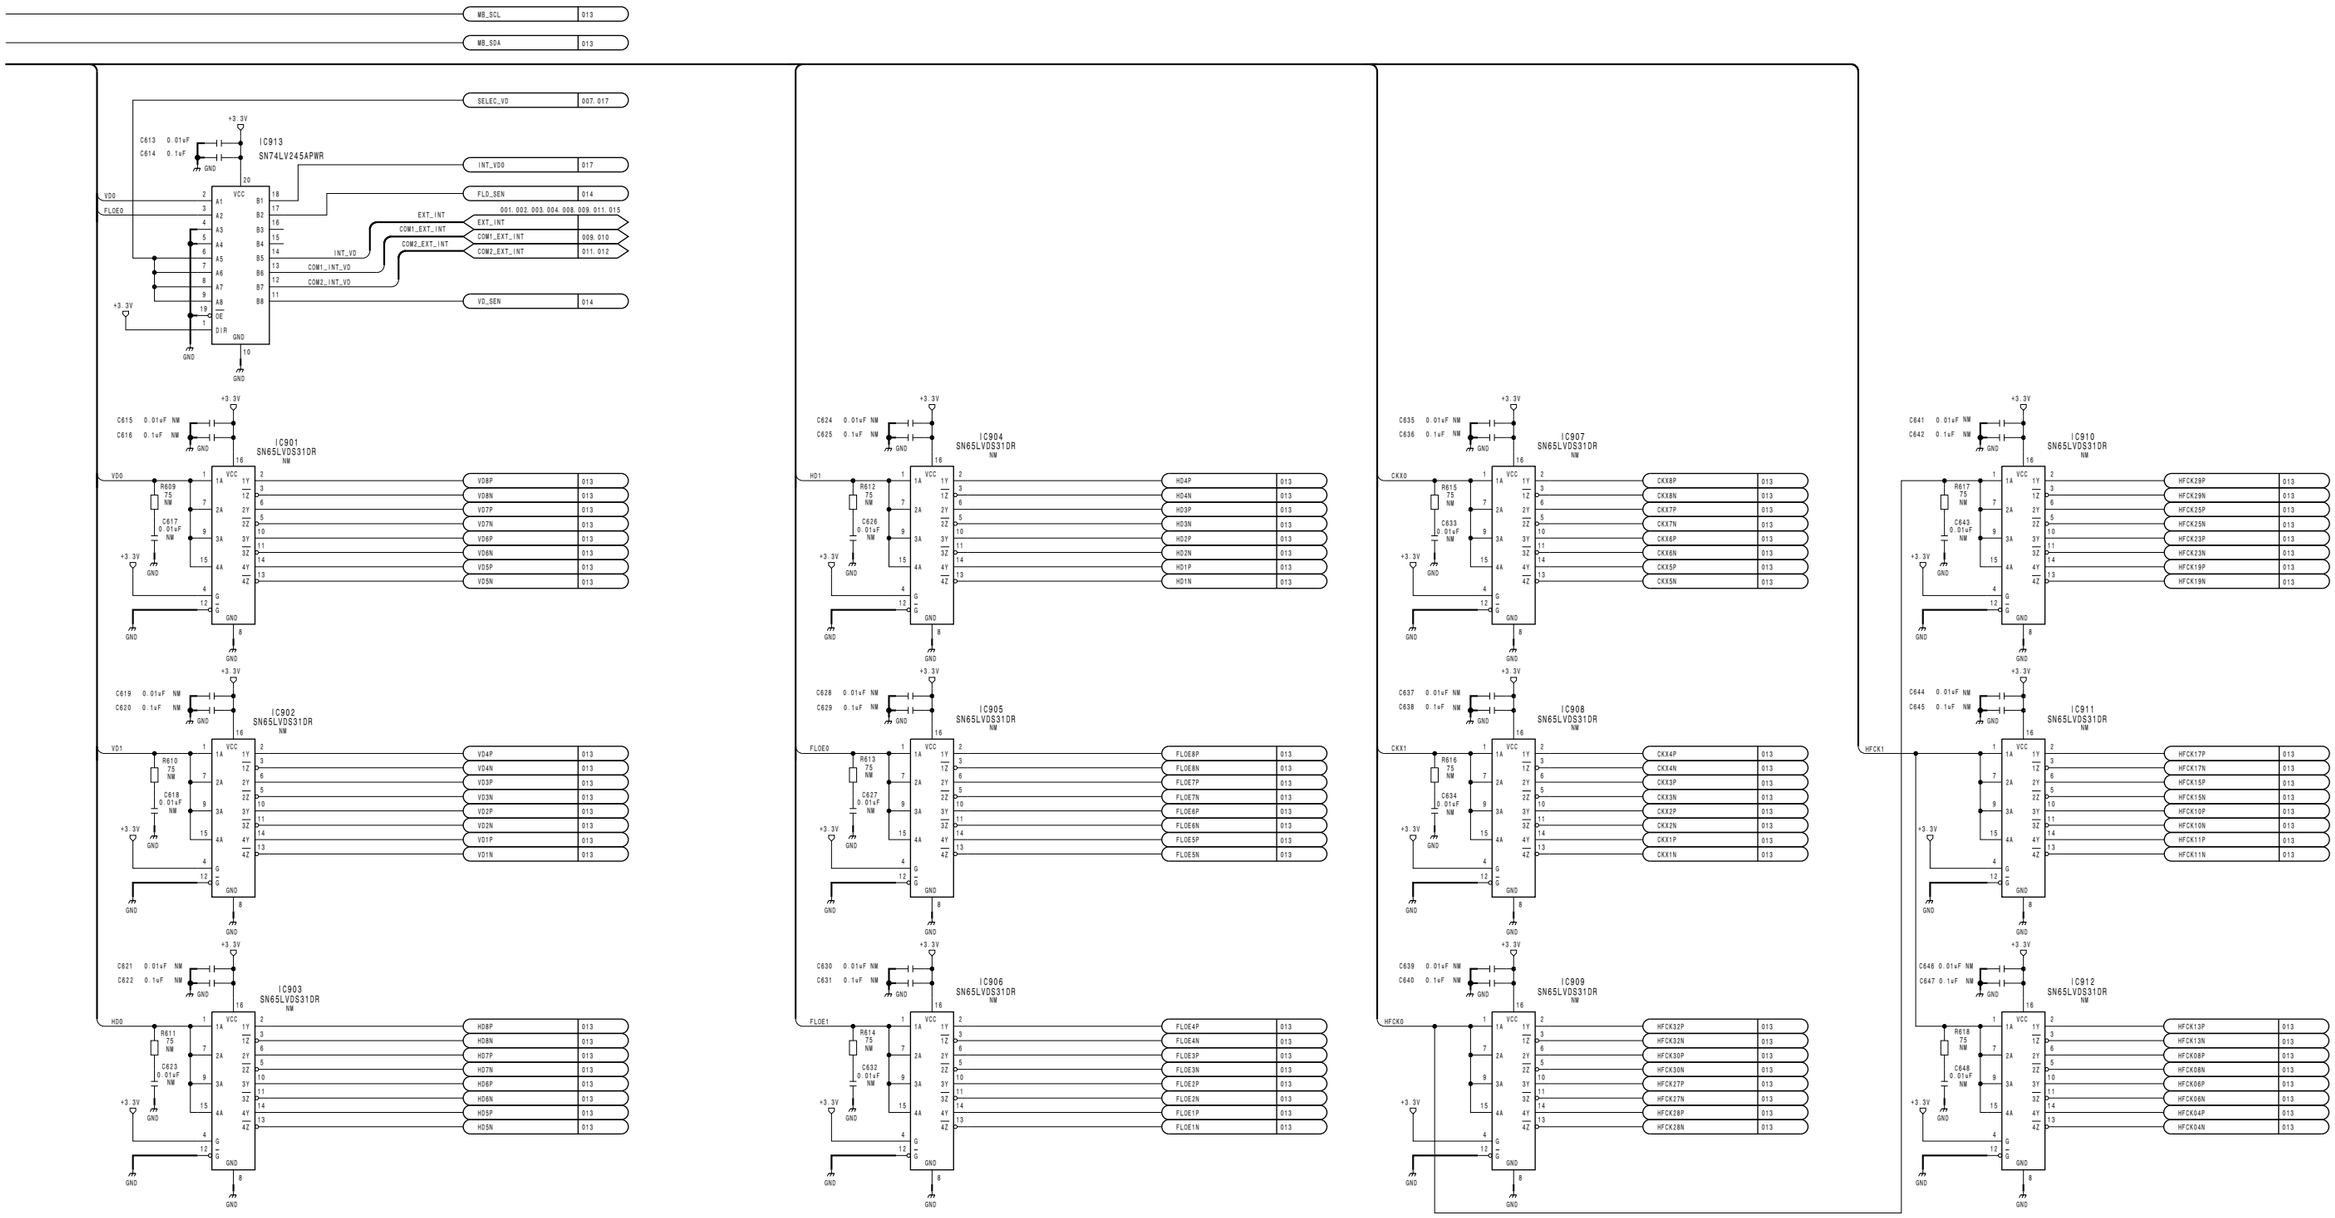


CPU Board
CA-54CFE (6/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_6

CA-54CFE (7/17)
SUFFIX: -24

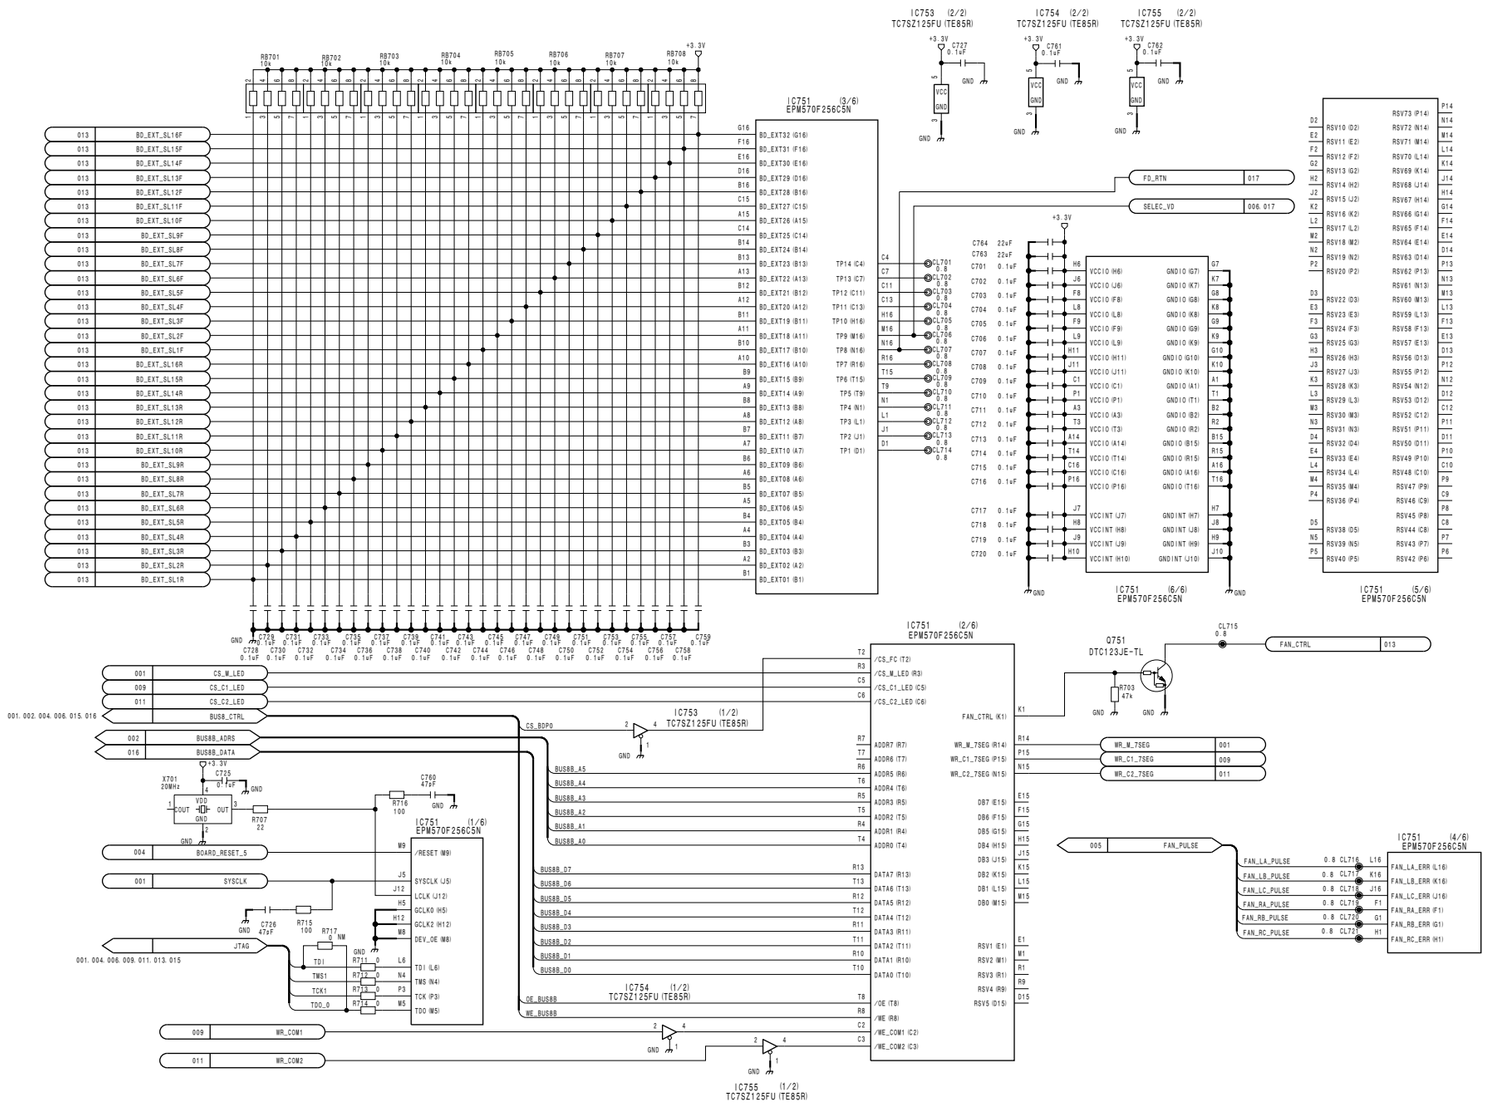

CPU Board
CA-54CFE (7/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_7


CA-54CFE (8/17)
SUFFIX: -24

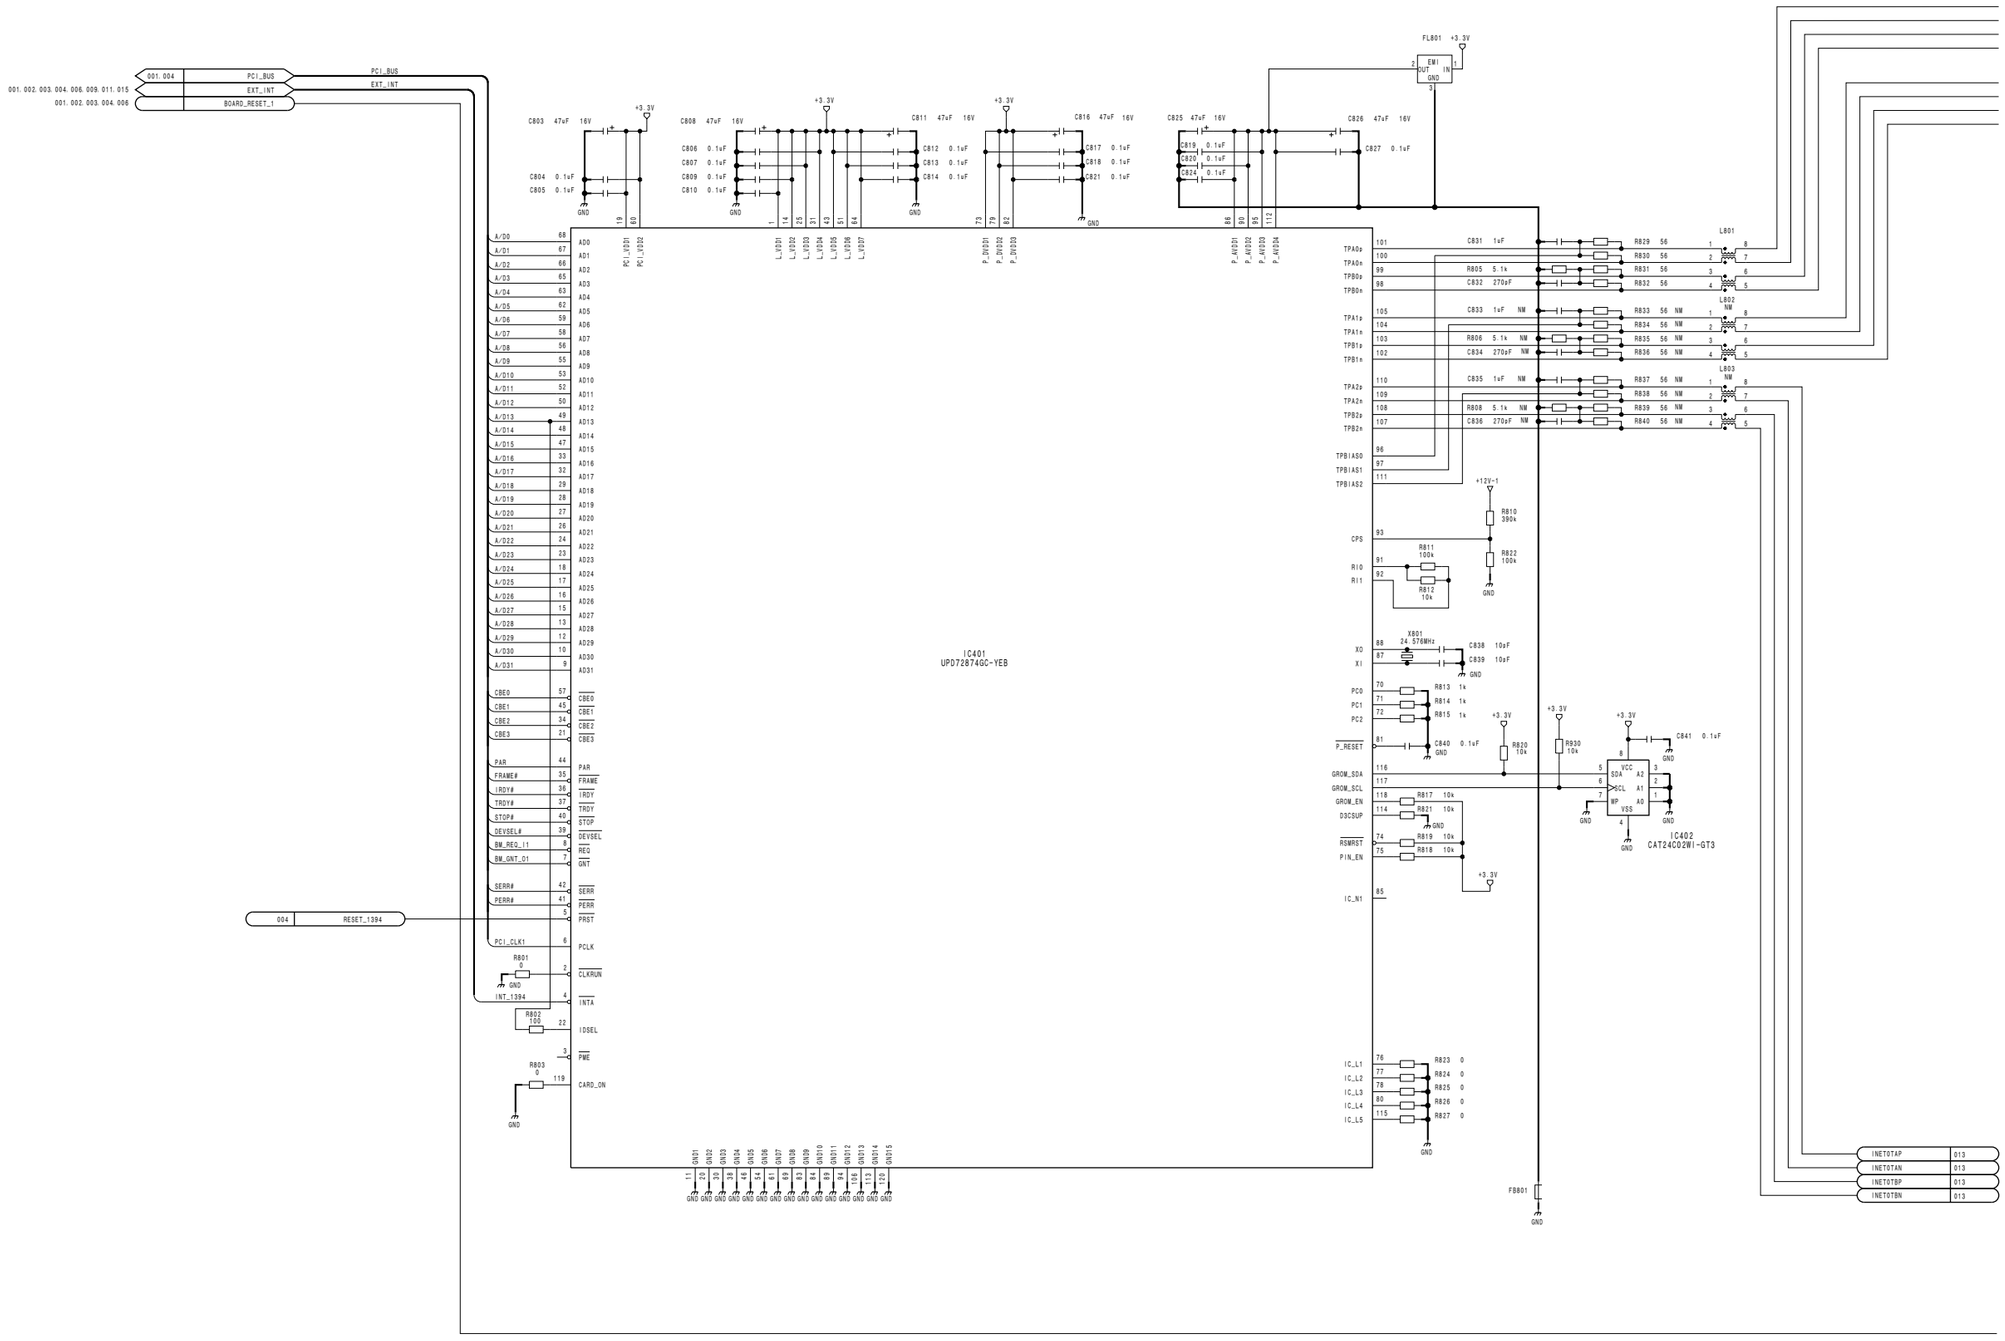

4-44


MVS-6000 MM

CA-54CFE (8/17)
SUFFIX: -24

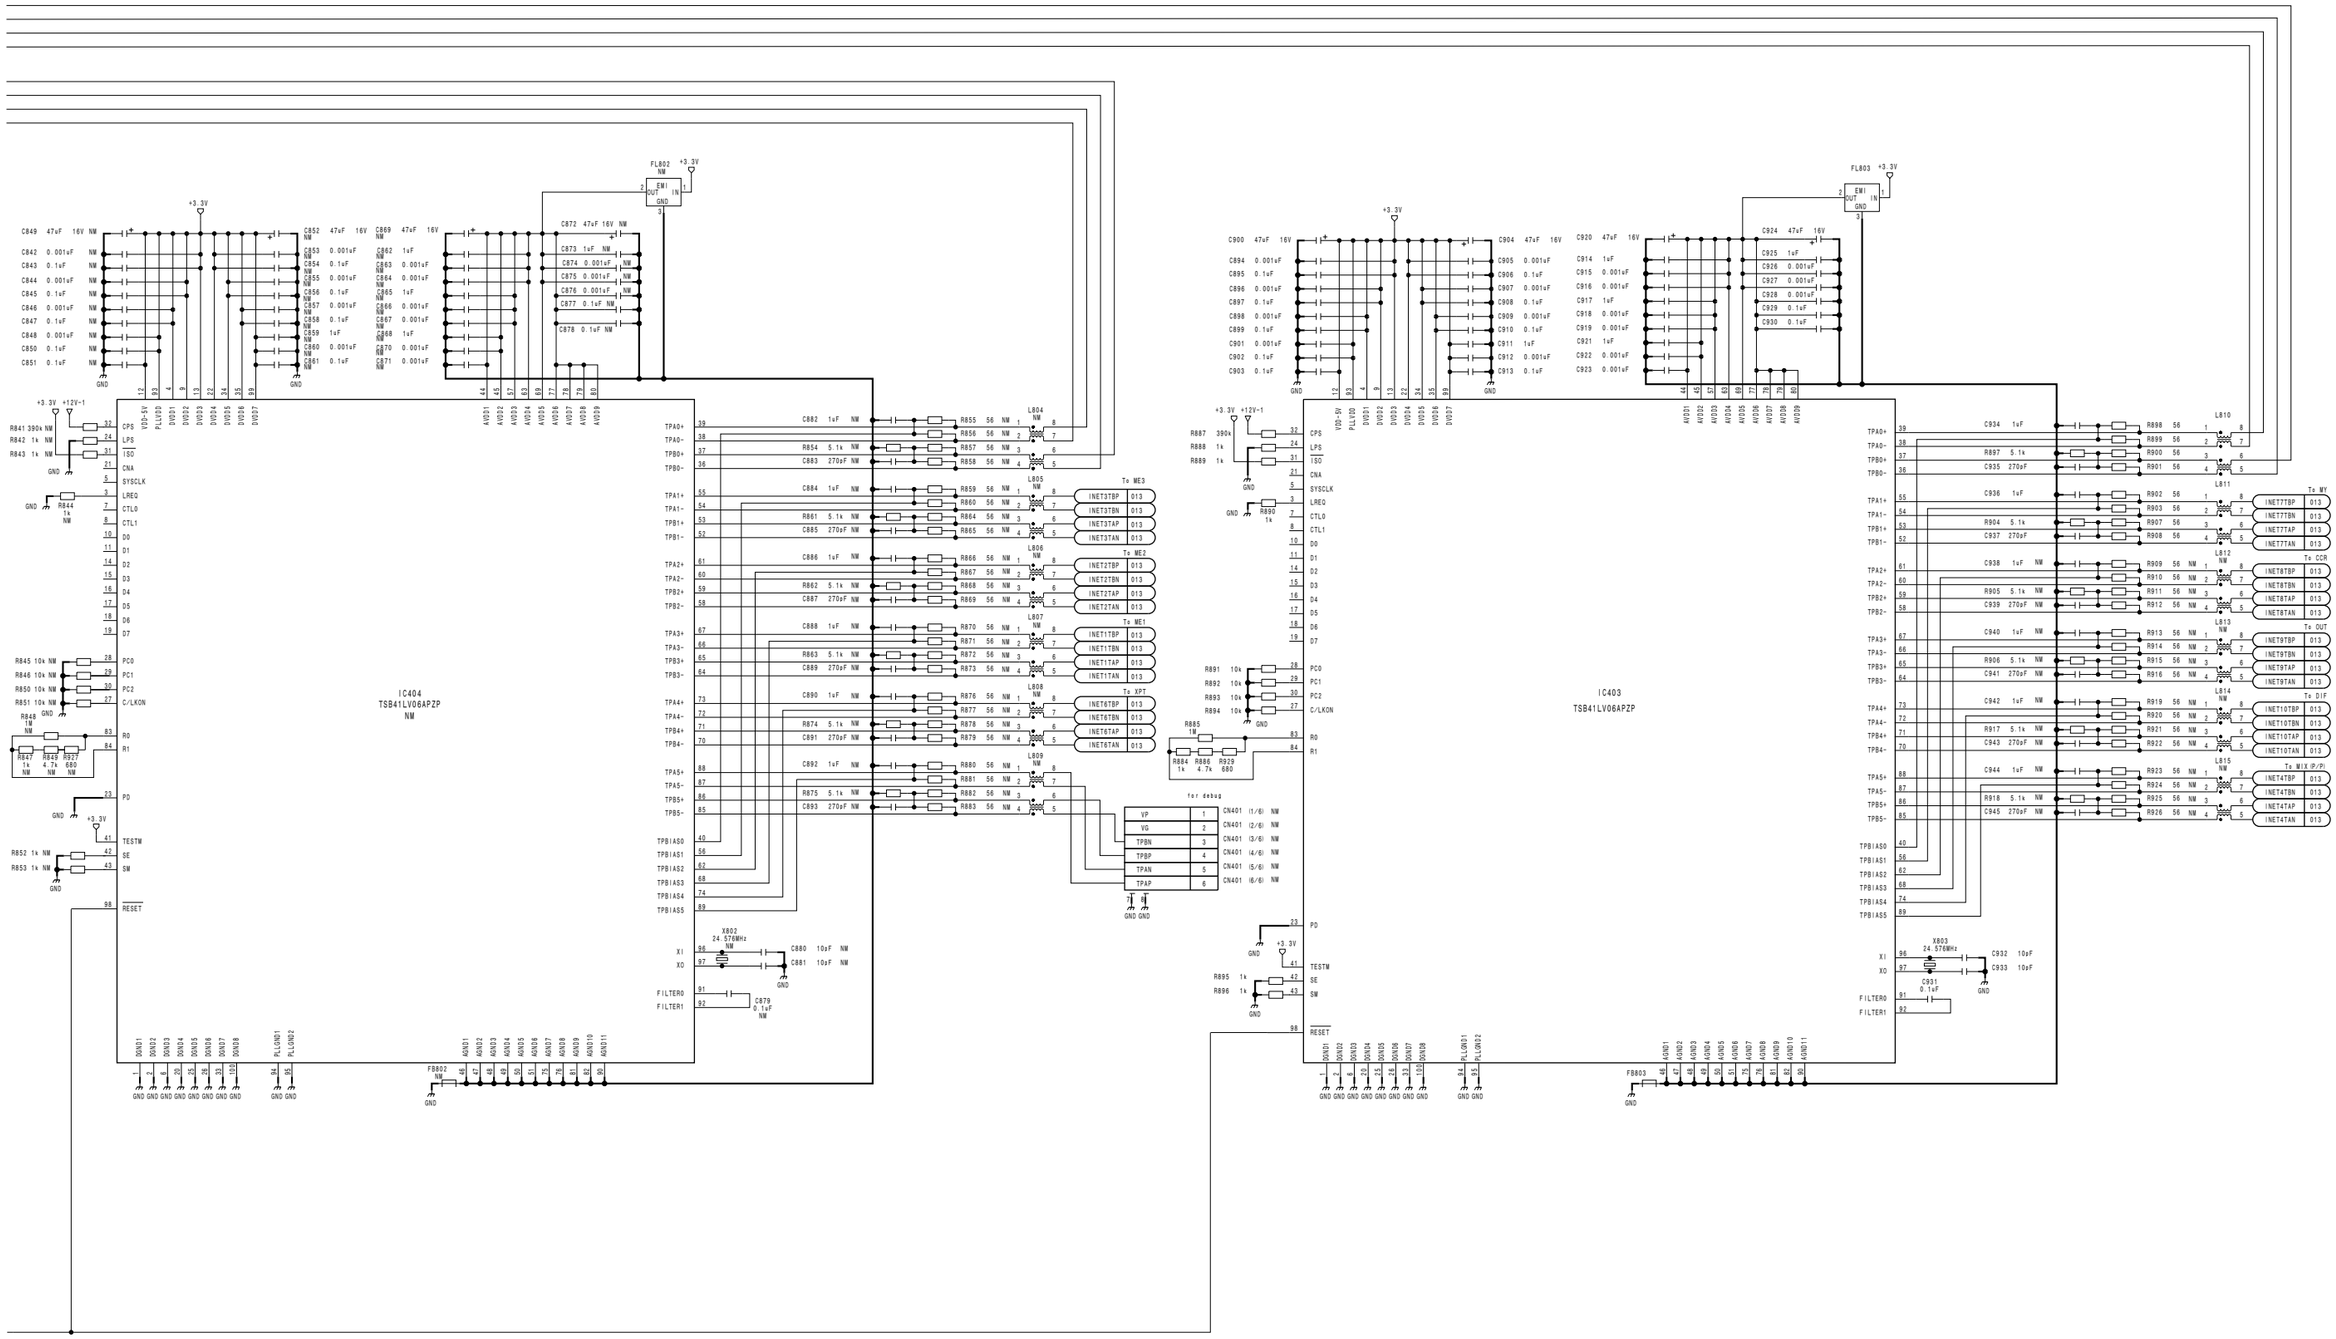


CPU Board
CA-54CFE (8/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_8


CA-54CFE (9/17)
SUFFIX: -24

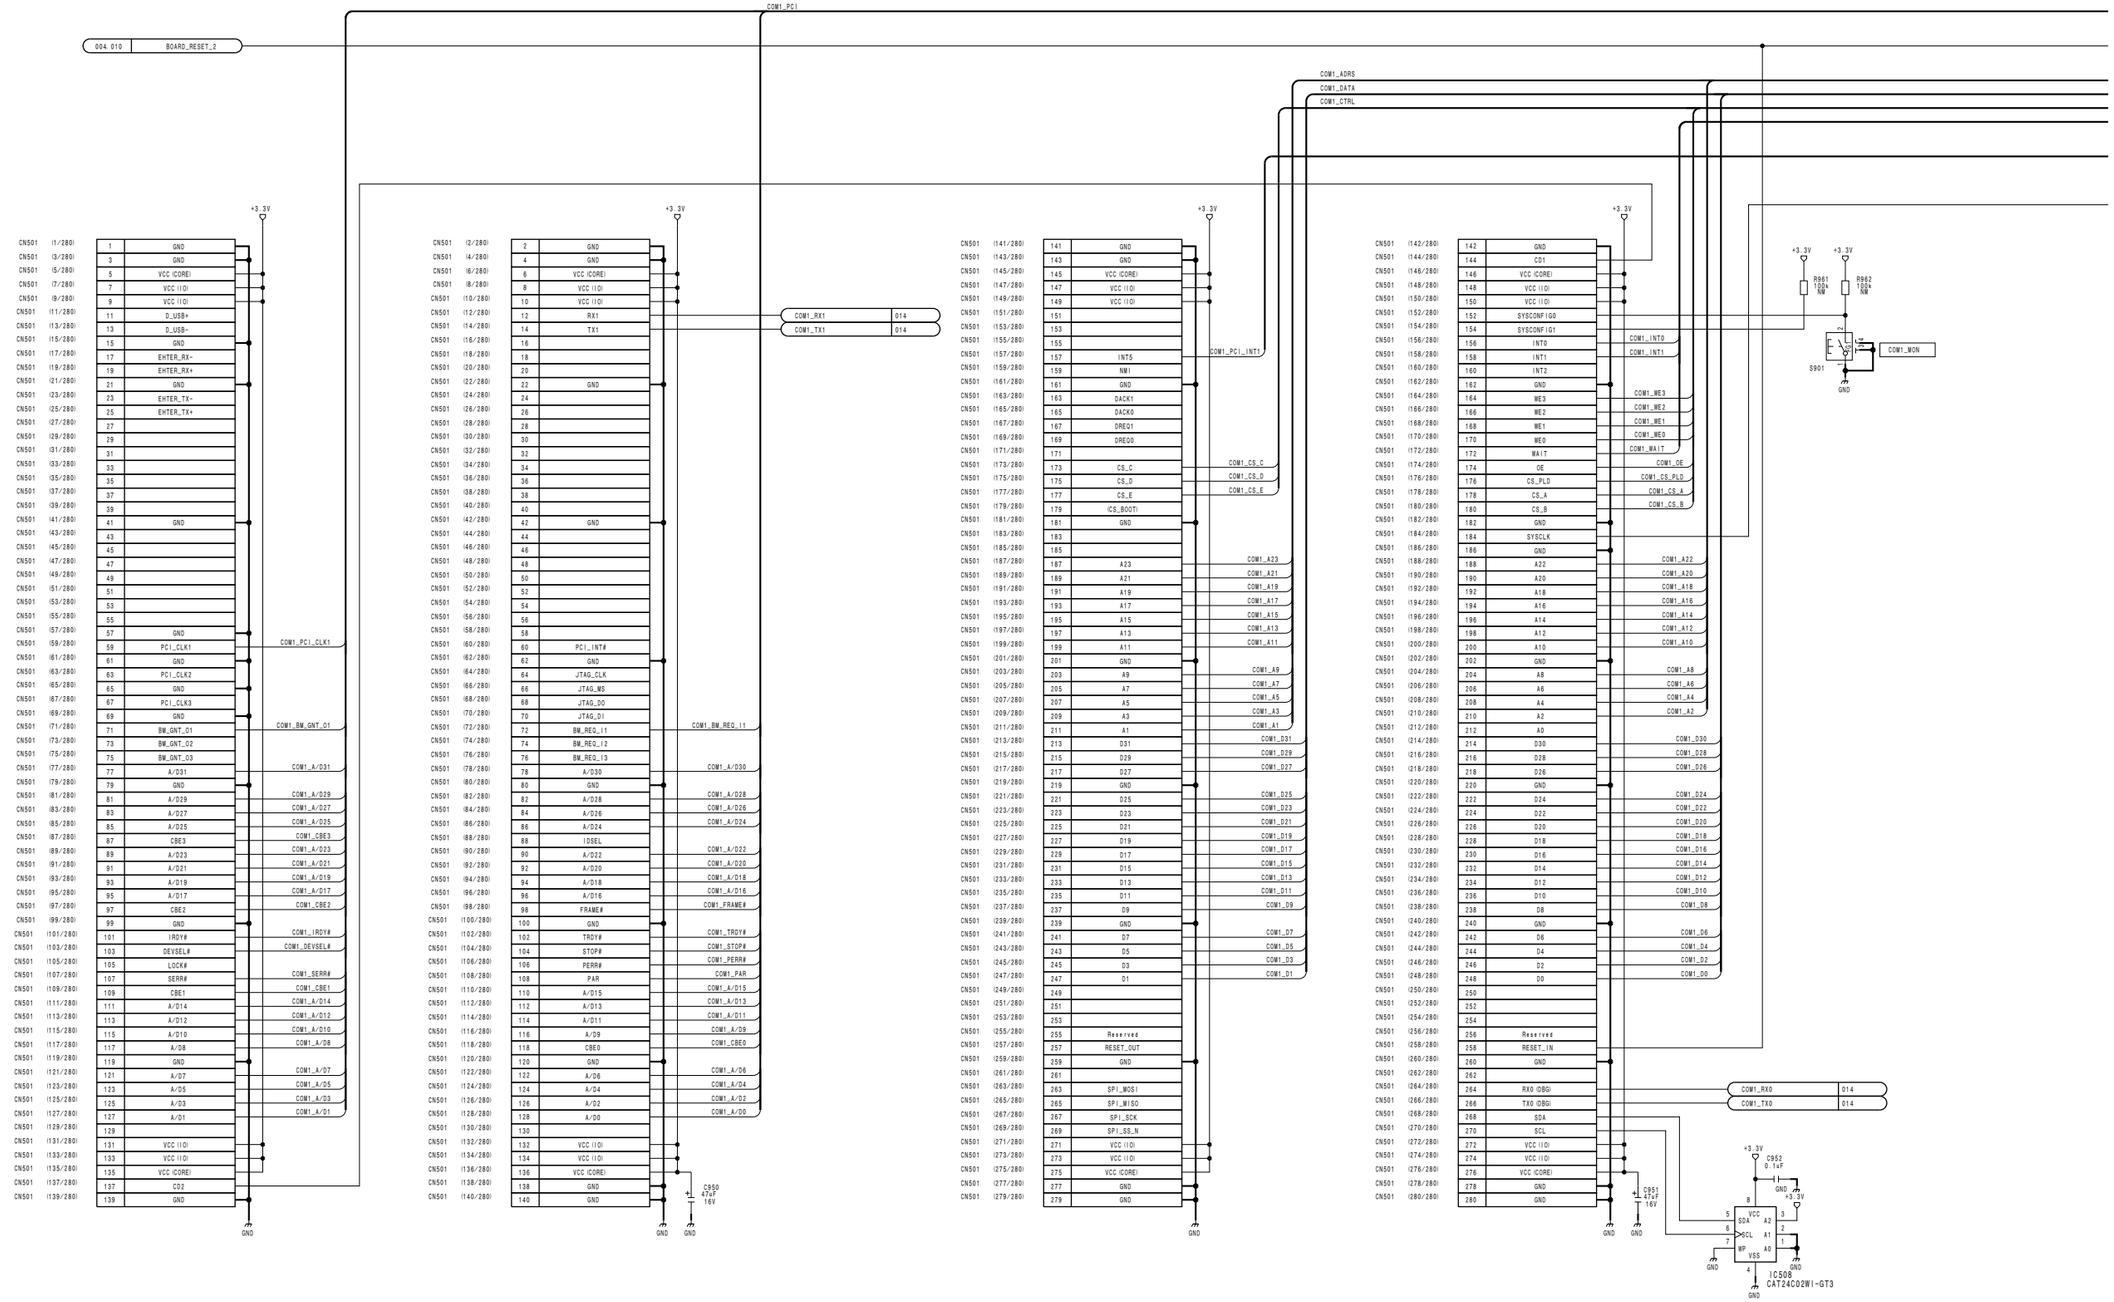

4-46

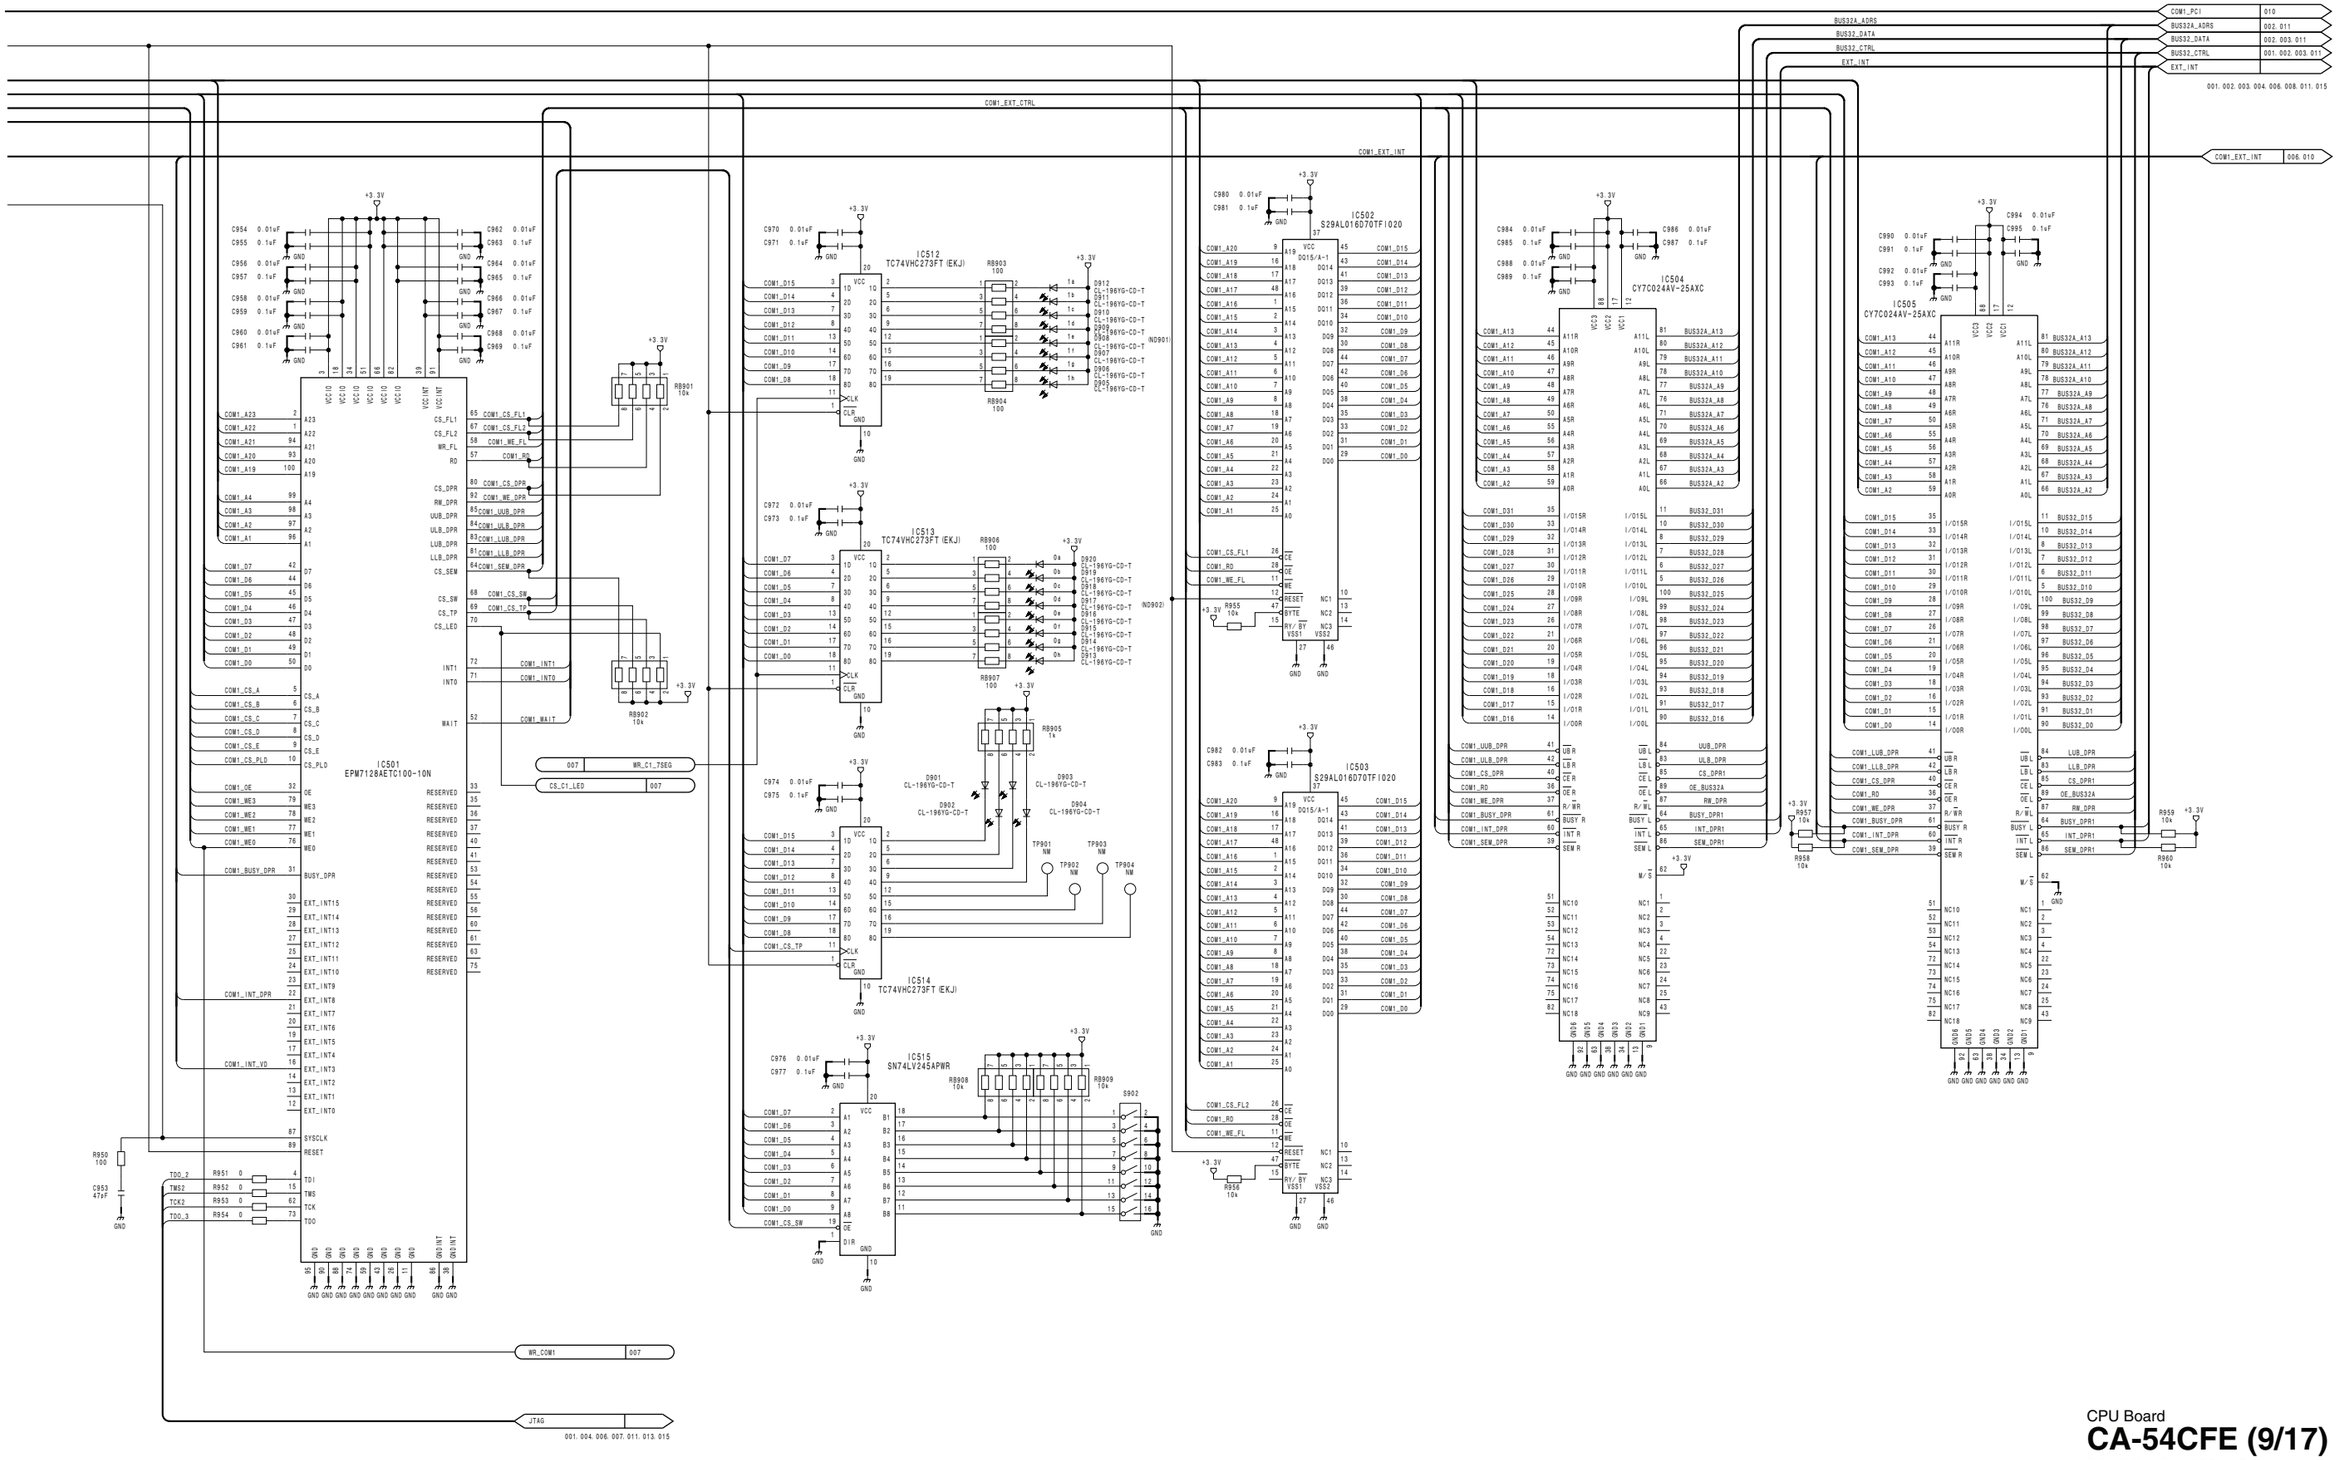

COM1_PC1 010
BUS32A_ADRS 002. 011
BUS32_DATA 002. 003. 011
BUS32_CTRL 001. 002. 003. 011
EXT_INT
001. 002. 003. 004. 006. 008. 011. 015
COM1_EXT_INT 006. 010
COM1_EXT_CTRL
BUS32A_ADRS
BUS32_DATA
BUS32_CTRL
EXT_INT
IC501 EPM7128AETC100-10N
IC502 S29AL016D70TFI020
IC503 S29AL016D70TFI020
IC504 CY7C024AV-25AXC
IC505 CY7C024AV-25AXC
IC512 TC74VHC273FT (EKJ)
IC513 TC74VHC273FT (EKJ)
IC514 TC74VHC273FT (EKJ)
IC515 SN74LV245APWR
WR_C1_75EG 007
CS_C1_LED 007
WR_COM1 007
JTAG 001. 004. 006. 007. 011. 013. 015
CPU Board
CA-54CFE (9/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_9

CA-54CFE (10/17)
SUFFIX: -24

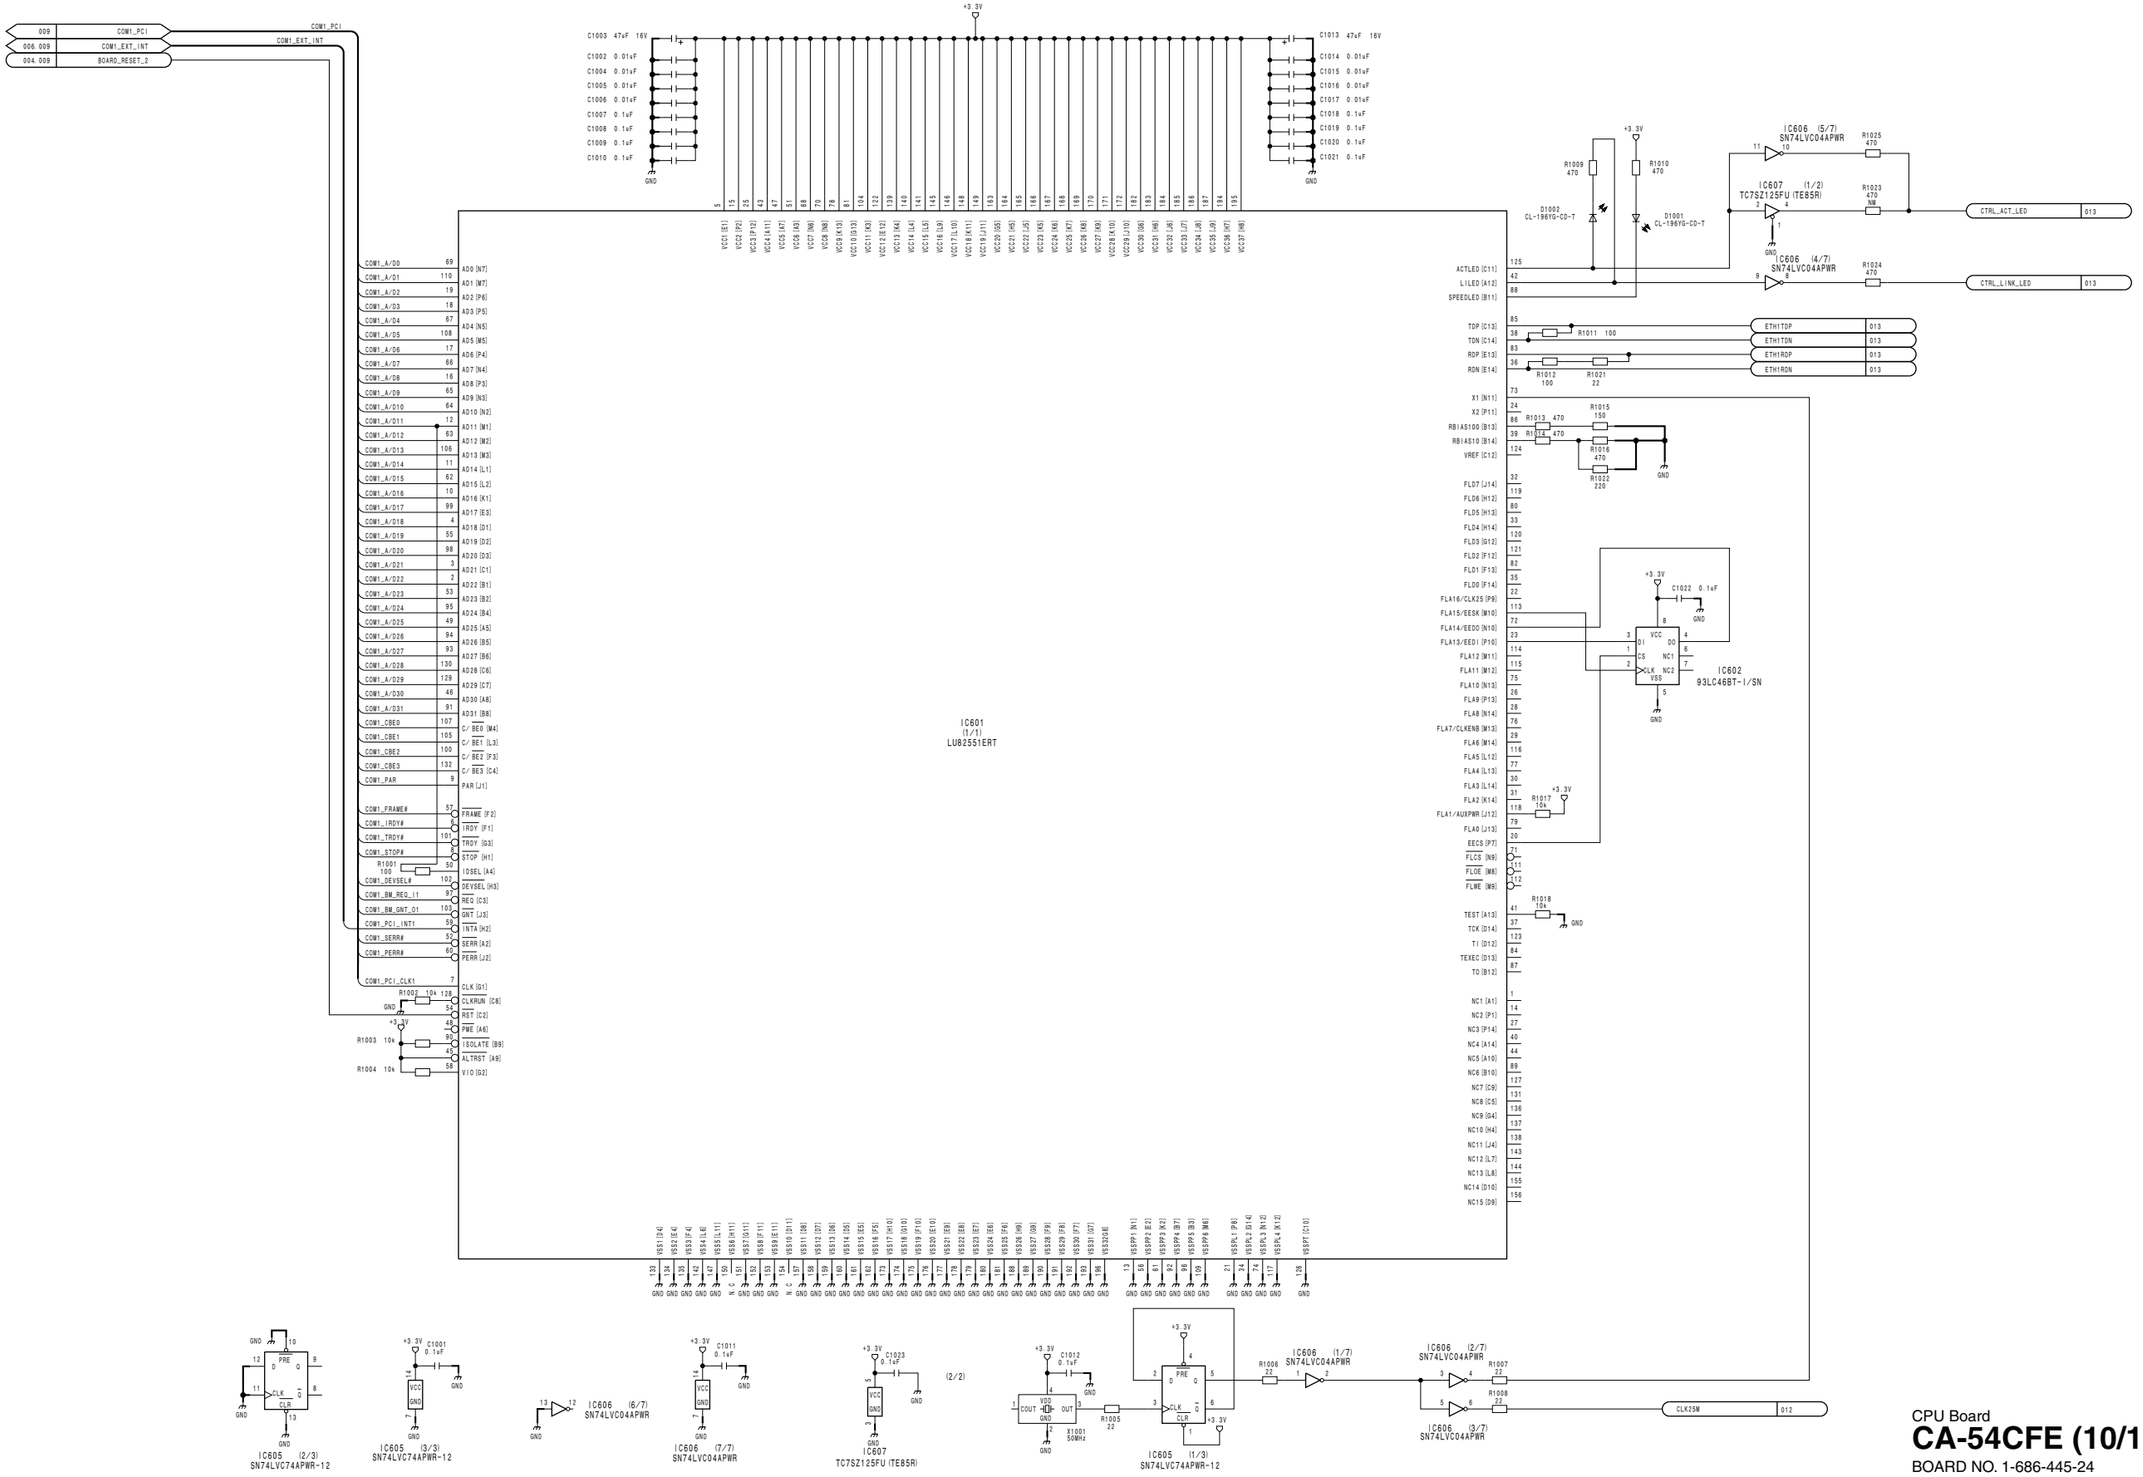


CPU Board
CA-54CFE (10/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_10

CA-54CFE (11/17)
SUFFIX: -24

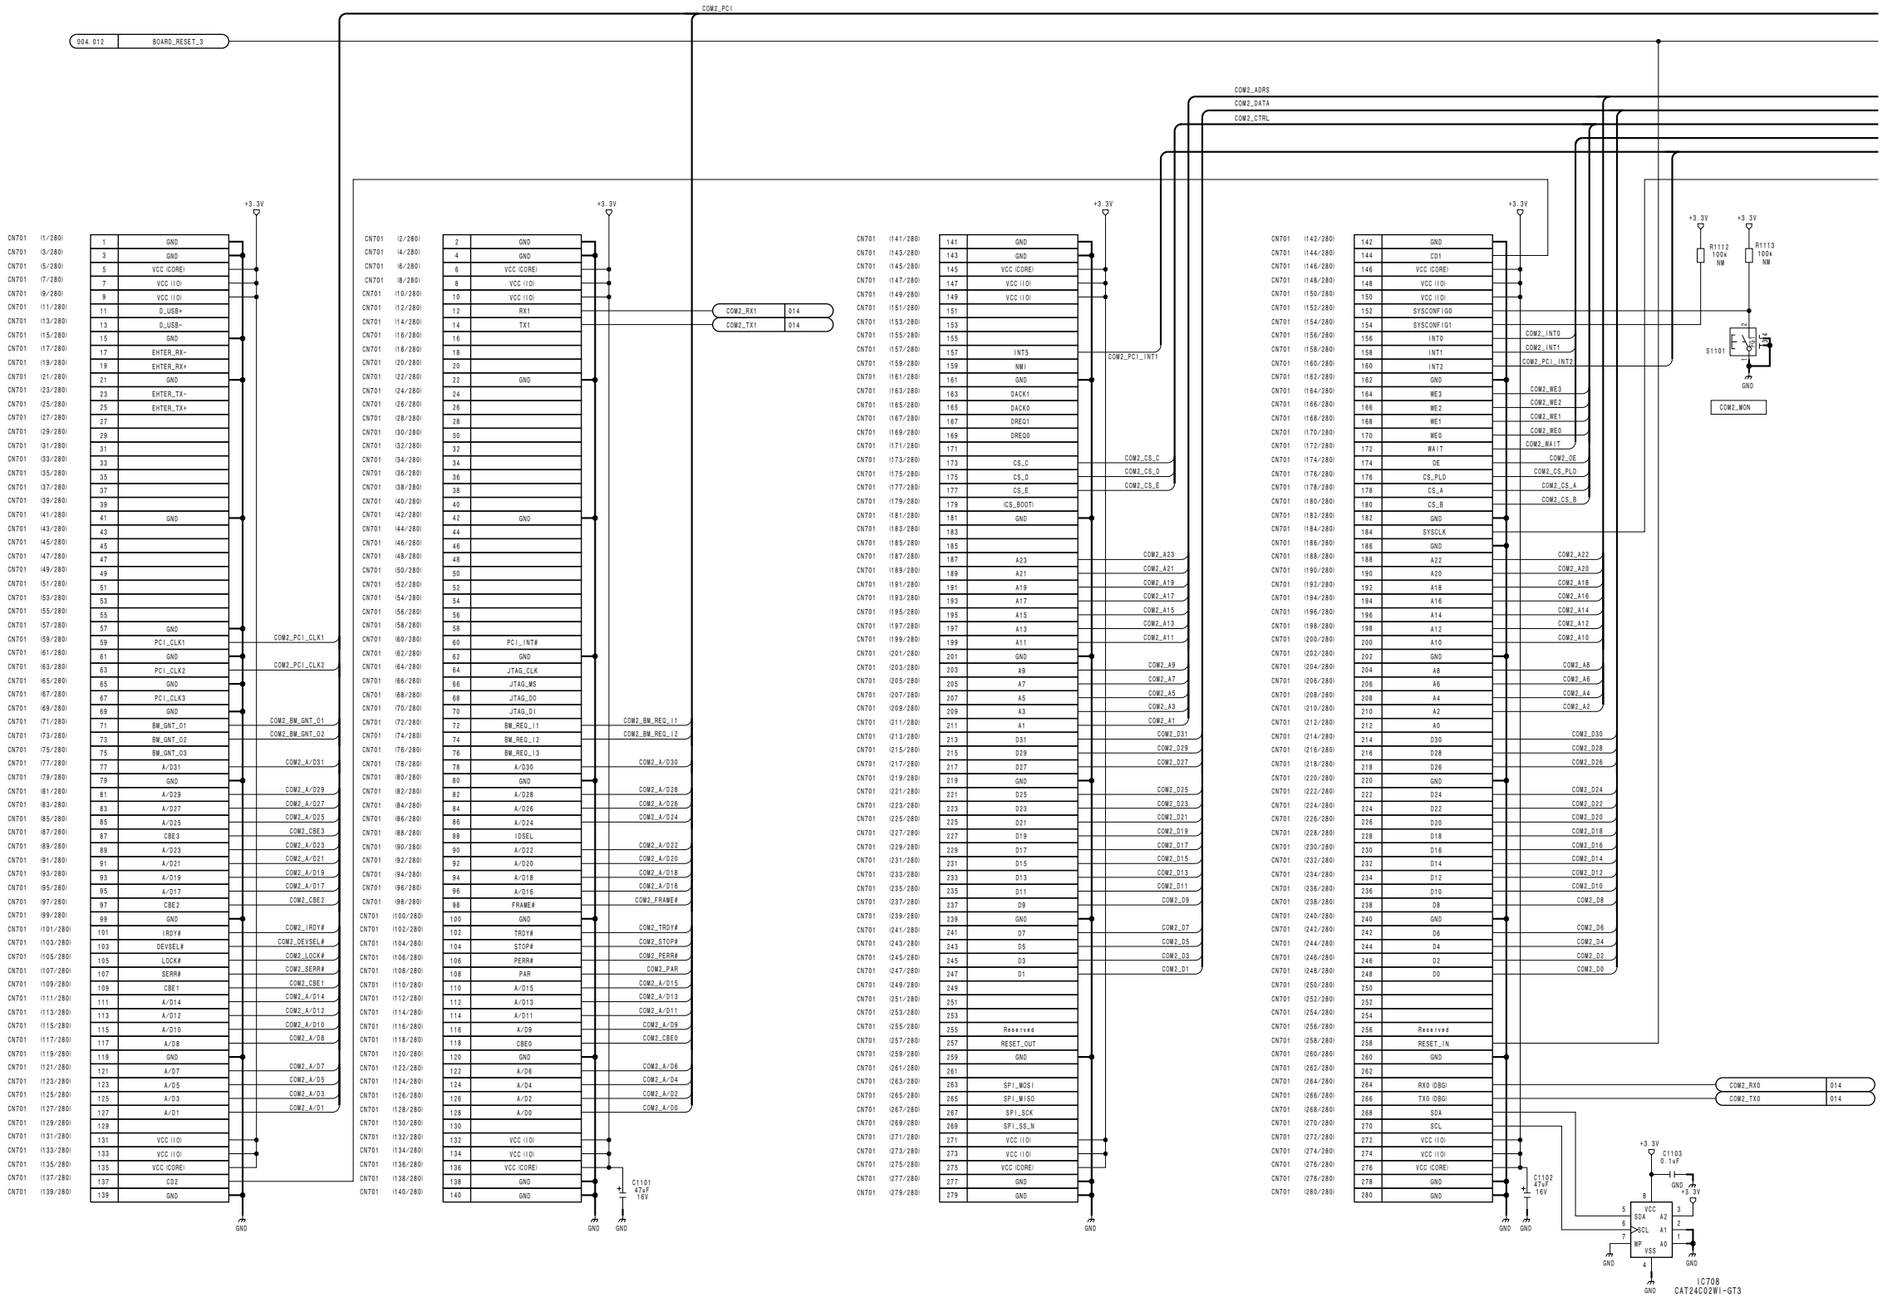


4-50

CA-54CFE (11/17)
SUFFIX: -24

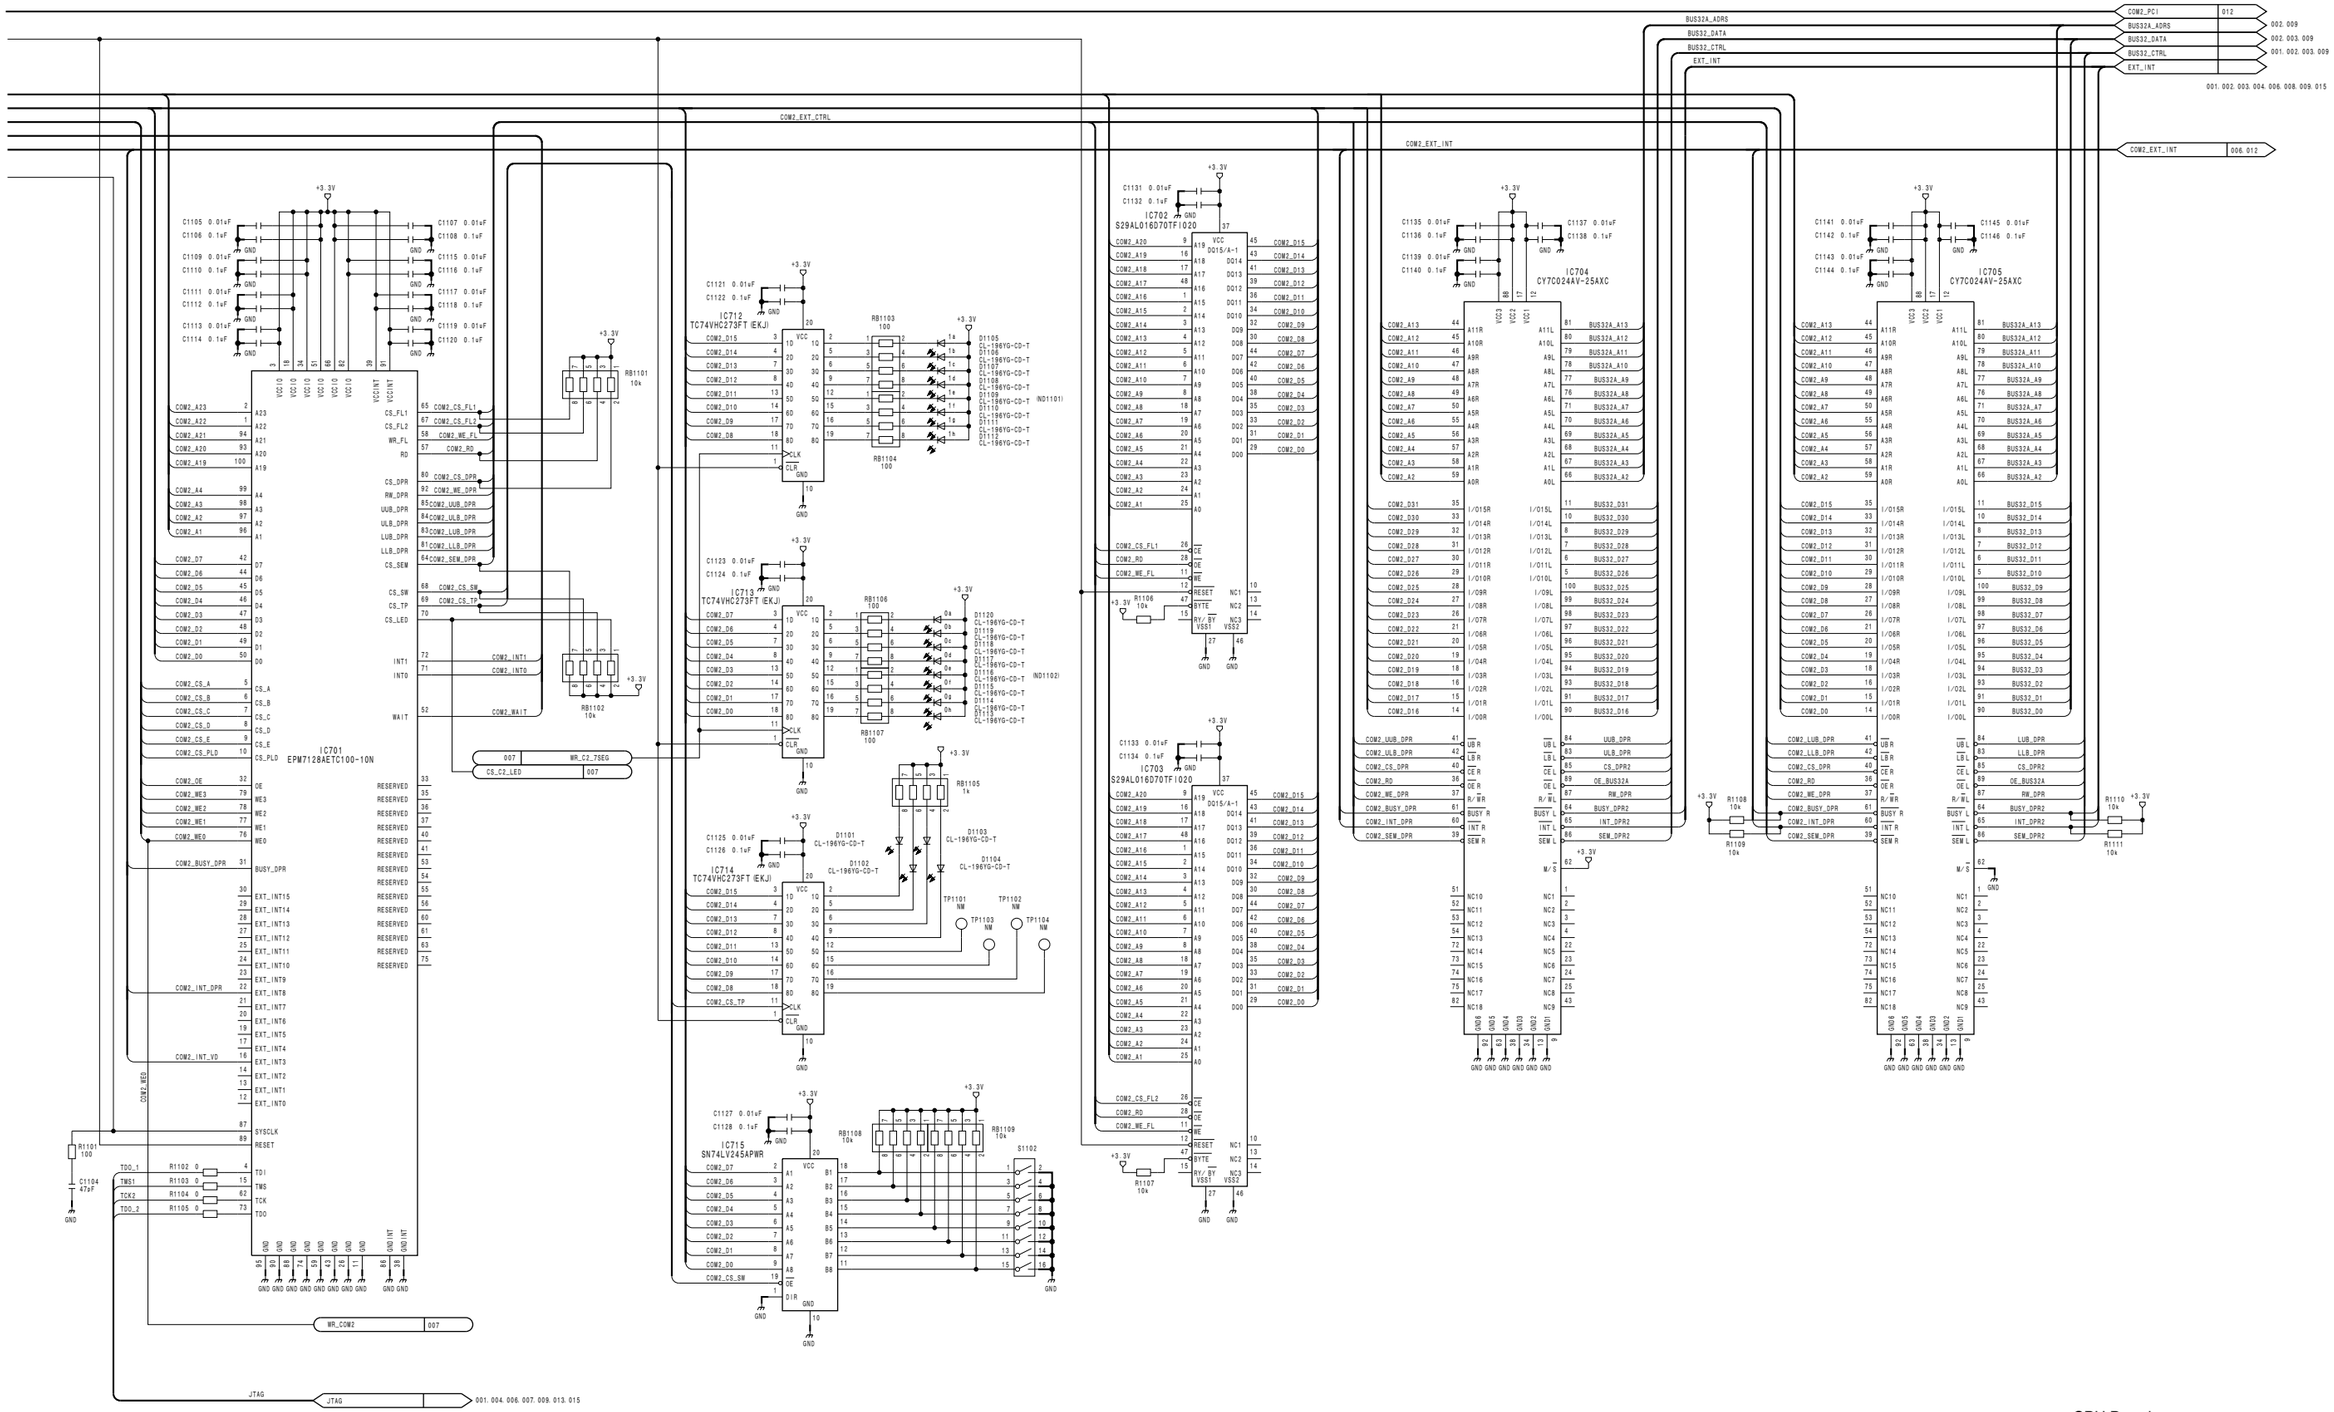


CPU Board
CA-54CFE (11/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_11

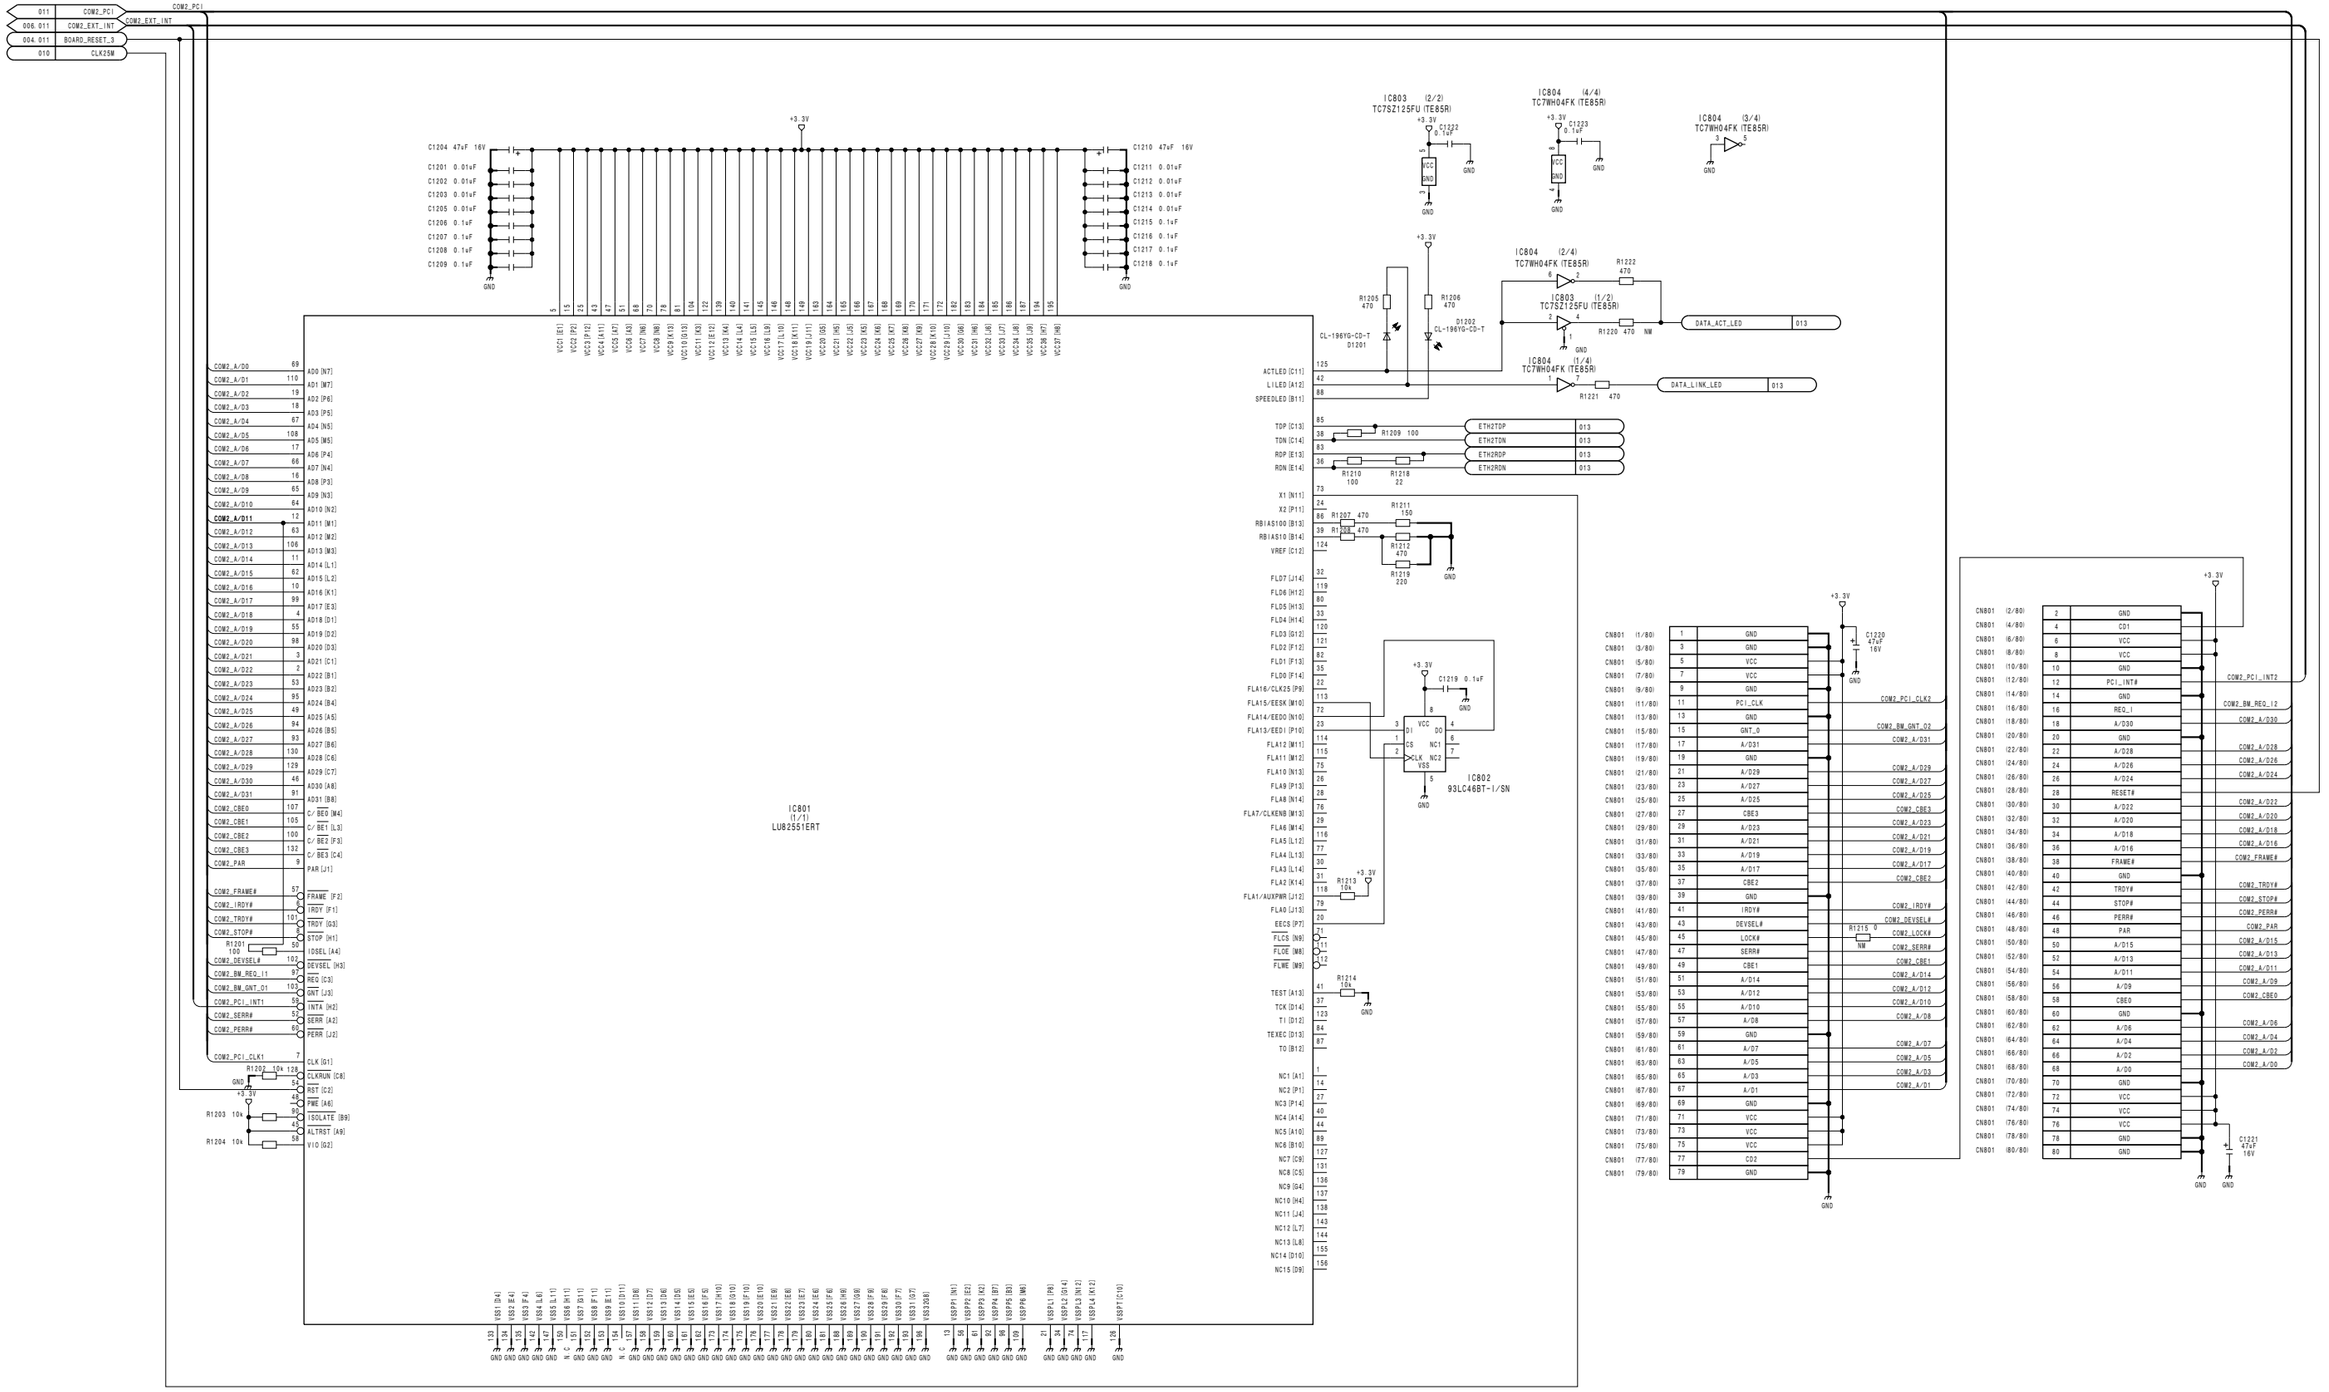

CPU Board
CA-54CFE (12/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_12

MVS-6000 MM

CA-54CFE (13/17) **SUFFIX: -24**

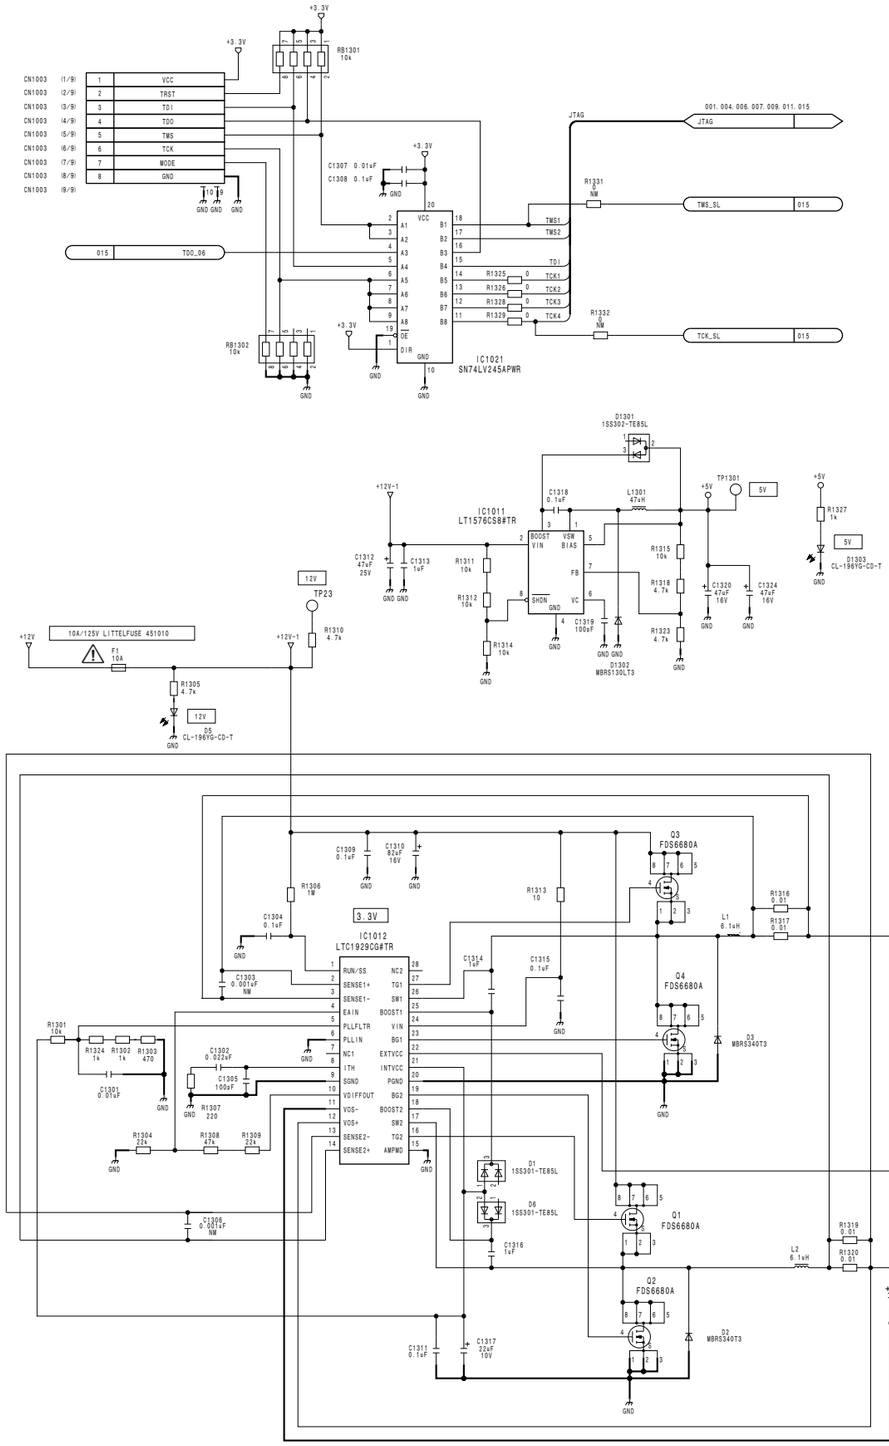

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	DC_ENBL	DC_ENBL	GND	FAN_CTRL	FUSE+12V	GND
6	SLOT7	SLOT6	GND	SLOT5	SLOT4	GND
7	SLOT3	SLOT2	GND	SLOT1	SLOT0	GND
8	RESET_1L	RESET_2L	GND	RESET_3L	RESET_4L	GND
9	FAN_RE_ERR	FAN_RF_ERR	GND	FAN_RG_ERR	FAN_RH_ERR	GND
10	FAN_RA_ERR	FAN_RB_ERR	GND	FAN_RC_ERR	FAN_RD_ERR	GND
11	FORMAT	ACERROR0	GND	DCERROR0	FANERROR0	GND
12						GND
13						GND
14						GND
15	FAN_RI_ERR	FAN_RJ_ERR	GND	FAN_RK_ERR	FAN_RL_ERR	GND
16	PSEXIST1	ACERROR1	GND	DCERROR1	FANERROR1	GND
17	GLED1	RLED1	GND	RS+ (1)	GNDRS- (1)	GND
18	PSEXIST2	ACERROR2	GND	DCERROR2	FANERROR2	GND
19	GLED2	RLED2	GND	RS+ (2)	GNDRS- (2)	GND
20	PSEXIST3	ACERROR3	GND	DCERROR3	FANERROR3	GND
21	GLED3	RLED3	GND	RS+ (3)	GNDRS- (3)	GND
22	PSEXIST4	ACERROR4	GND	DCERROR4	FANERROR4	GND
23	GLED4	RLED4	GND	RS+ (4)	GNDRS- (4)	GND
24	PSEXIST5	ACERROR5	GND	DCERROR5	FANERROR5	GND
25	GLED5	RLED5	GND	RS+ (5)	GNDRS- (5)	GND

CNX1

	a	b	c	d	e	FG
1	INET4TAP	INET4TAN	GND	INET4TBP	INET4TBN	GND
2	INET3TAP	INET3TAN	GND	INET3TBP	INET3TBN	GND
3	INET2TAP	INET2TAN	GND	INET2TBP	INET2TBN	GND
4	INET1TAP	INET1TAN	GND	INET1TBP	INET1TBN	GND
5			GND			GND
6			GND			GND
7	INET0TAP	INET0TAN	GND	INET0TBP	INET0TBN	GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16	INET6TAP	INET6TAN	GND	INET6TBP	INET6TBN	GND
17			GND			GND
18	GPIIN9	GPIIN10	GND	GPIIN11	GPIIN12	GND
19	GPIIN13	GPIIN14	GND	GPIIN15	GPIIN16	GND
20	GPIOUT9A	GPIOUT9B	GND	GPIOUT10A	GPIOUT10B	GND
21	GPIOUT11A	GPIOUT11B	GND	GPIOUT12A	GPIOUT12B	GND
22	GPIOUT13	GPIOUT14	GND	GPIOUT15	GPIOUT16	GND
23			GND	GND	GND	GND
24			GND	GND		GND
25			GND	GND	GND	GND

CNY1

	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	GPIIN1	GPIIN2	GND	GPIIN3	GPIIN4	GND
3	GPIIN5	GPIIN6	GND	GPIIN7	GPIIN8	GND
4	GPIOUT1A	GPIOUT1B	GND	GPIOUT2A	GPIOUT2B	GND
5	GPIOUT3A	GPIOUT3B	GND	GPIOUT4A	GPIOUT4B	GND
6	GPIOUT5	GPIOUT6	GND	GPIOUT7	GPIOUT8	GND
7	GND (GPICOM1)	GND (GPICOM2)	GND	GND (GPICOM3)	GND (GPICOM4)	GND
8	GND	GND	GND	GND	GND	GND
9	RS232CTX	RS232CRX	GND			GND
10	GND	GND	GND	GND	GND	GND
11	RS422TX1P	RS422TX1N	GND	RS422RX1P	RS422RX1N	GND
12	GND	GND	GND	GND	GND	GND
13	RS422TX2P	RS422TX2N	GND	RS422RX2P	RS422RX2N	GND
14	GND	GND	GND	GND	GND	GND
15	RS422TX3P	RS422TX3N	GND	RS422RX3P	RS422RX3N	GND
16	GND	GND	GND	GND	GND	GND
17	RS422TX4P	RS422TX4N	GND	RS422RX4P	RS422RX4N	GND
18	GND	GND	GND	GND	GND	GND
19	RS422VT1P	RS422VT1N	GND	RS422VT2P	RS422VT2N	GND
20	GND	GND	GND	GND	GND	GND
21	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
22	GND	GND	GND	GND	GND	GND

CNY1

	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	GND		GND	GND	REF_IN	GND
3	GND	GND	GND	GND	GND	GND
4	GND		GND	GND	REF_OUT	GND
5	GND	GND	GND	GND	GND	GND
6	POW_SEQ0	POW_SEQ1	GND	ID0	ID1	GND
7	ID2	ID3	GND	ID4	ID5	GND
8	BD_EXT_SL16F	BD_EXT_SL16R	GND	BD_EXT_SL8F	BD_EXT_SL8R	GND
9	BD_EXT_SL15F	BD_EXT_SL15R	GND	BD_EXT_SL7F	BD_EXT_SL7R	GND
10	BD_EXT_SL14F	BD_EXT_SL14R	GND	BD_EXT_SL6F	BD_EXT_SL6R	GND
11	BD_EXT_SL13F	BD_EXT_SL13R	GND	BD_EXT_SL5F	BD_EXT_SL5R	GND
12	BD_EXT_SL12F	BD_EXT_SL12R	GND	BD_EXT_SL4F	BD_EXT_SL4R	GND
13	BD_EXT_SL11F	BD_EXT_SL11R	GND	BD_EXT_SL3F	BD_EXT_SL3R	GND
14	BD_EXT_SL10F	BD_EXT_SL10R	GND	BD_EXT_SL2F	BD_EXT_SL2R	GND
15	BD_EXT_SL9F	BD_EXT_SL9R	GND	BD_EXT_SL1F	BD_EXT_SL1R	GND
16	CTRL_LINK_LED	CTRL_ACT_LED	GND	DATA_LINK_LED	DATA_ACT_LED	GND
17	HFCK32P	HFCK32N	GND	HFCK30P	HFCK30N	GND
18	HFCK29P	HFCK29N	GND	HFCK28P	HFCK28N	GND
19	HFCK27P	HFCK27N	GND	HFCK25P	HFCK25N	GND
20	HFCK23P	HFCK23N	GND	HFCK19P	HFCK19N	GND
21	HFCK17P	HFCK17N	GND	HFCK15P	HFCK15N	GND
22	HFCK13P	HFCK13N	GND	HFCK11P	HFCK11N	GND

CNW1


	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	ETH1TDP	ETH1TDN	GND	ETH1RDP	ETH1RDN	GND
3	GND	GND	GND	GND	GND	GND
4	ETH2TDP	ETH2TDN	GND	ETH2RDP	ETH2RDN	GND
5	GND	GND	GND	GND	GND	GND
6	BUS_A0	BUS_A1	GND	BUS_A2	BUS_A3	GND
7	BUS_A4	BUS_A5	GND	BUS_A6	BUS_A7	GND
8	BUS_A8	BUS_A9	GND	BUS_A10	BUS_A11	GND
9	BUS_A12	BUS_A13	GND	BUS_A14	BUS_A15	GND
10	BUS_OE	BUS_WE	GND	BUS_CS1	BUS_CS2	GND
11	BUS_CS3	BUS_CS4	GND	BUS_CS5	RESERVE_OUT1	GND
12						GND
13						GND
14						GND
15	BUS_D0	BUS_D1	GND	BUS_D2	BUS_D3	GND
16	BUS_D4	BUS_D5	GND	BUS_D6	BUS_D7	GND
17	BUS_D8	BUS_D9	GND	BUS_D10	BUS_D11	GND
18	BUS_D12	BUS_D13	GND	BUS_D14	BUS_D15	GND
19	BUS_INT	BUS_BUSY	GND	BUS_UB	BUS_LB	GND
20	RESERVE_IN1	RESERVE_IN2	GND	RESERVE_IN3	RESERVE_IN4	GND
21	FLOE_RTN_P	FLOE_RTN_N	GND		DME_BKE_N	GND
22	INET7TAP	INET7TAN	GND	INET7TBP	INET7TBN	GND
23	INET8TAP	INET8TAN	GND	INET8TBP	INET8TBN	GND
24	INET9TAP	INET9TAN	GND	INET9TBP	INET9TBN	GND
25	INET10TAP	INET10TAN	GND	INET10TBP	INET10TBN	GND

CNZ1

	a	b	c	d	e	FG
1	HFCK10P	HFCK10N	GND	HFCK08P	HFCK08N	GND
2	HFCK06P	HFCK06N	GND	HFCK04P	HFCK04N	GND
3	GND	GND	GND	GND	GND	GND
4	CKX8P	CKX8N	GND	CKX7P	CKX7N	GND
5	FLOE8P	FLOE8N	GND	FLOE7P	FLOE7N	GND
6	CKX6P	CKX6N	GND	CKX5P	CKX5N	GND
7	FLOE6P	FLOE6N	GND	FLOE5P	FLOE5N	GND
8	CKX4P	CKX4N	GND	CKX3P	CKX3N	GND
9	FLOE4P	FLOE4N	GND	FLOE3P	FLOE3N	GND
10	CKX2P	CKX2N	GND	CKX1P	CKX1N	GND
11	FLOE2P	FLOE2N	GND	FLOE1P	FLOE1N	GND
12						GND
13						GND
14						GND
15	HD8P	HD8N	GND	HD7P	HD7N	GND
16	VD8P	VD8N	GND	VD7P	VD7N	GND
17	HD6P	HD6N	GND	HD5P	HD5N	GND
18	VD6P	VD6N	GND	VD5P	VD5N	GND
19	HD4P	HD4N	GND	HD3P	HD3N	GND
20	VD4P	VD4N	GND	VD3P	VD3N	GND
21	HD2P	HD2N	GND	HD1P	HD1N	GND
22	VD2P	VD2N	GND	VD1P	VD1N	GND
23	GND	GND	GND	GND	GND	GND
24	FAN_LE_ERR	FAN_LF_ERR	GND	VD_IN_P	VD_IN_N	GND
25	FAN_LA_ERR	FAN_LB_ERR	GND	FAN_LC_ERR	FAN_LD_ERR	GND


CPU Board
CA-54CFE (13/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_13

CA-54CFE (14/17)
SUFFIX: -24

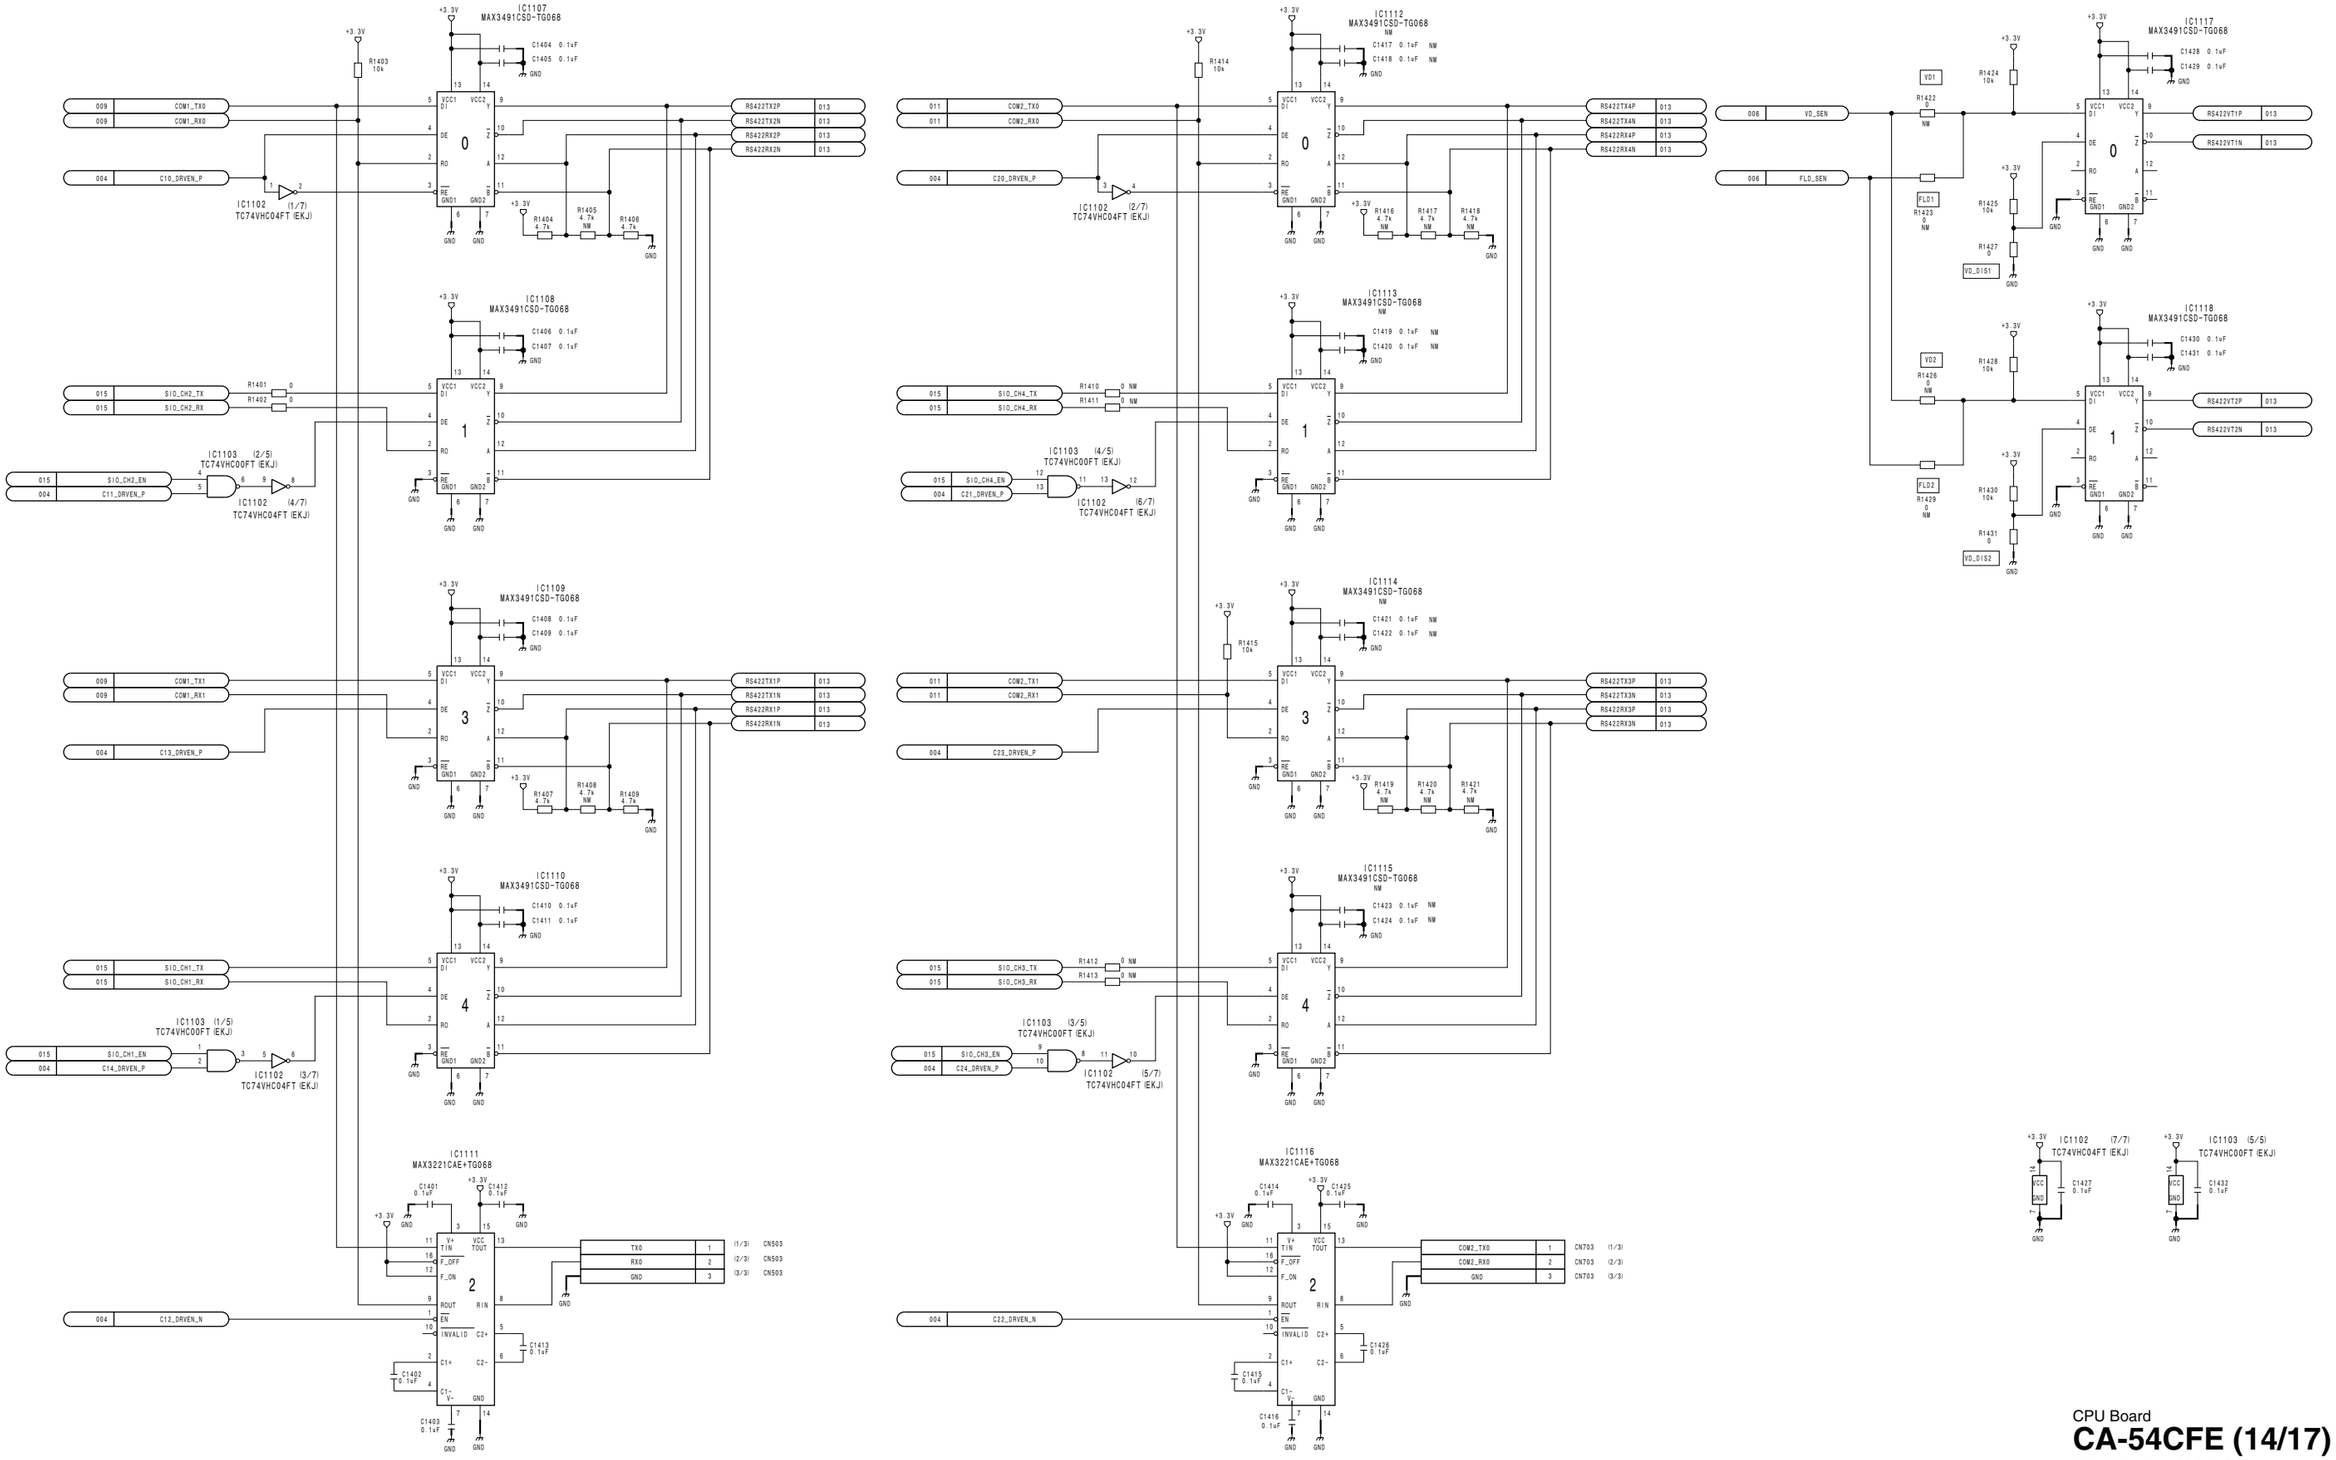



CPU Board
CA-54CFE (14/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_14

CA-54CFE (15/17)
SUFFIX: -24

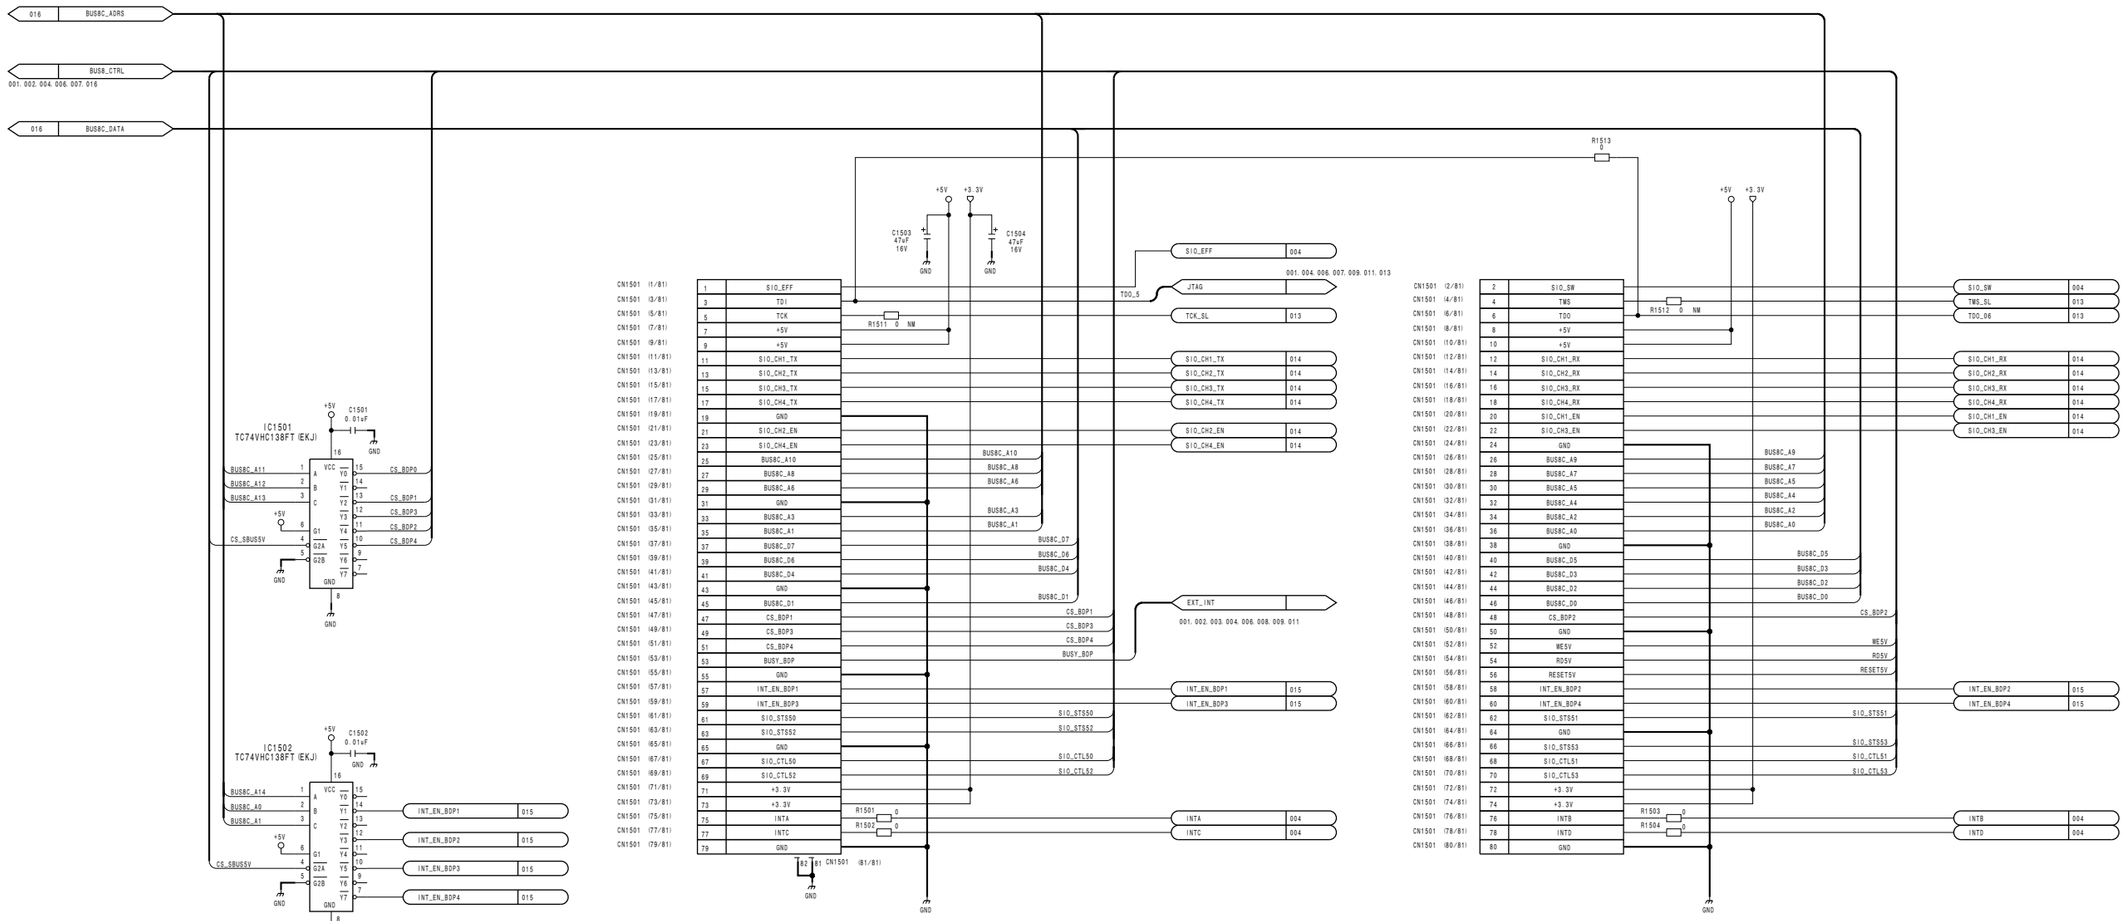


CA-54CFE (16/17)
SUFFIX: -24

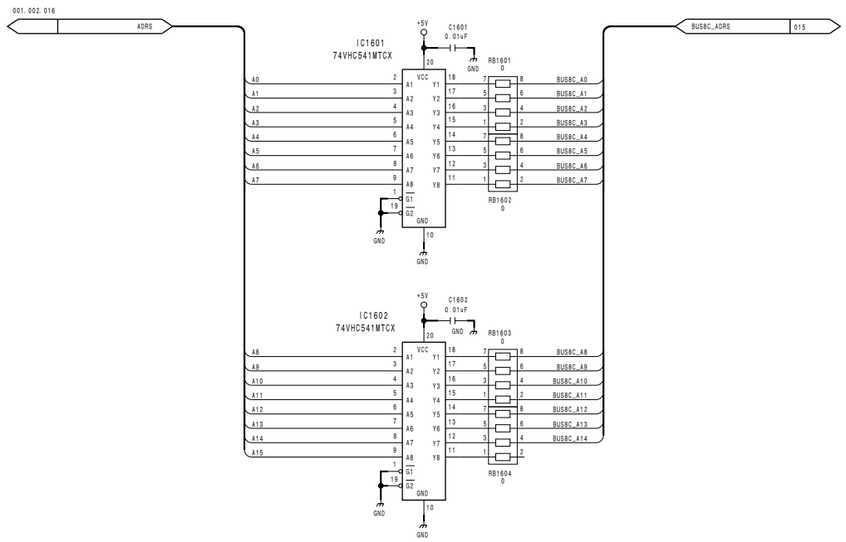

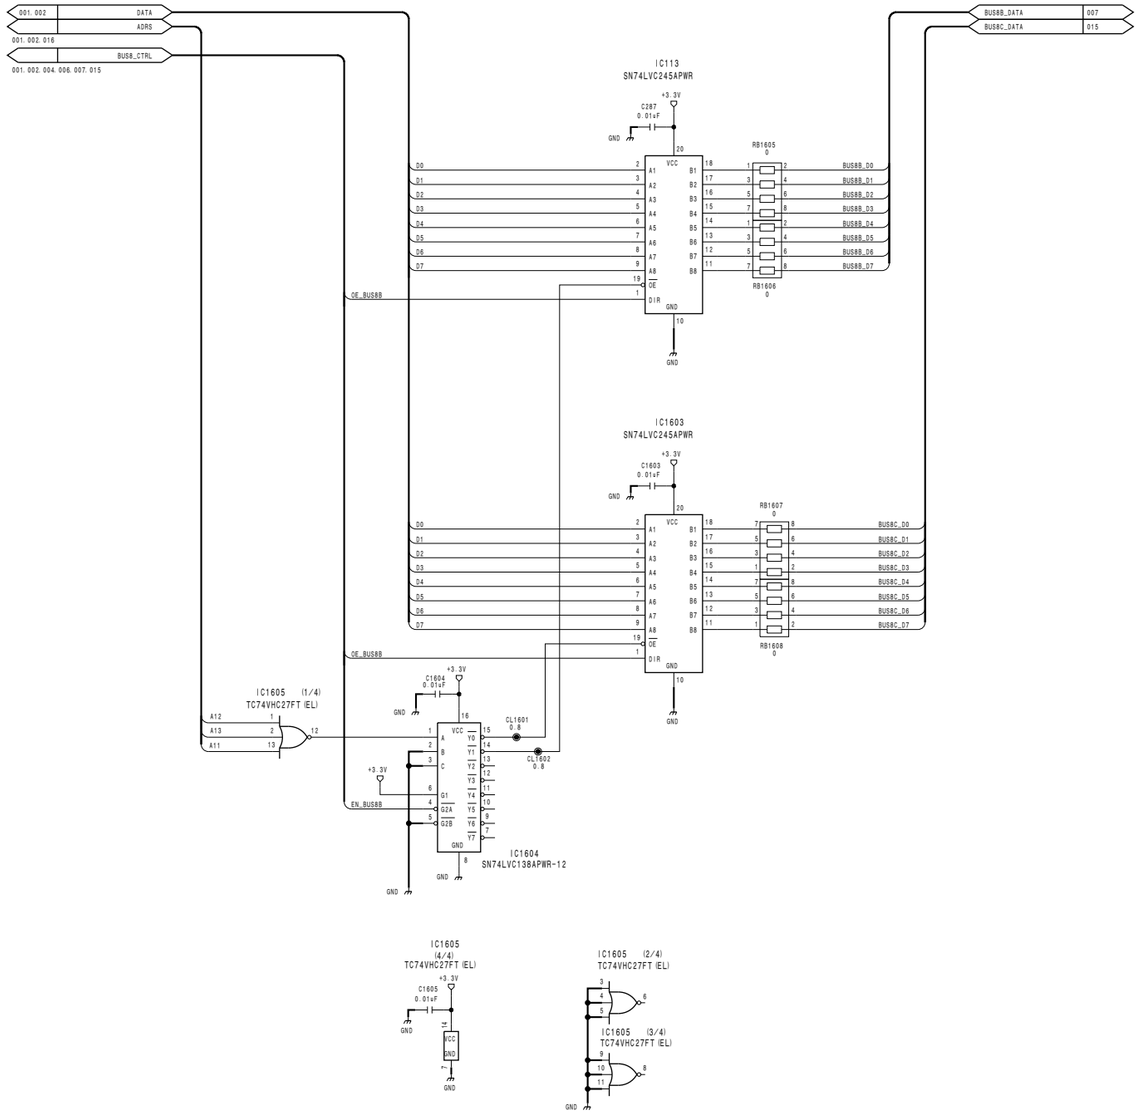

CPU Board
CA-54CFE (16/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_16

CA-54CFE (17/17)
SUFFIX: -24

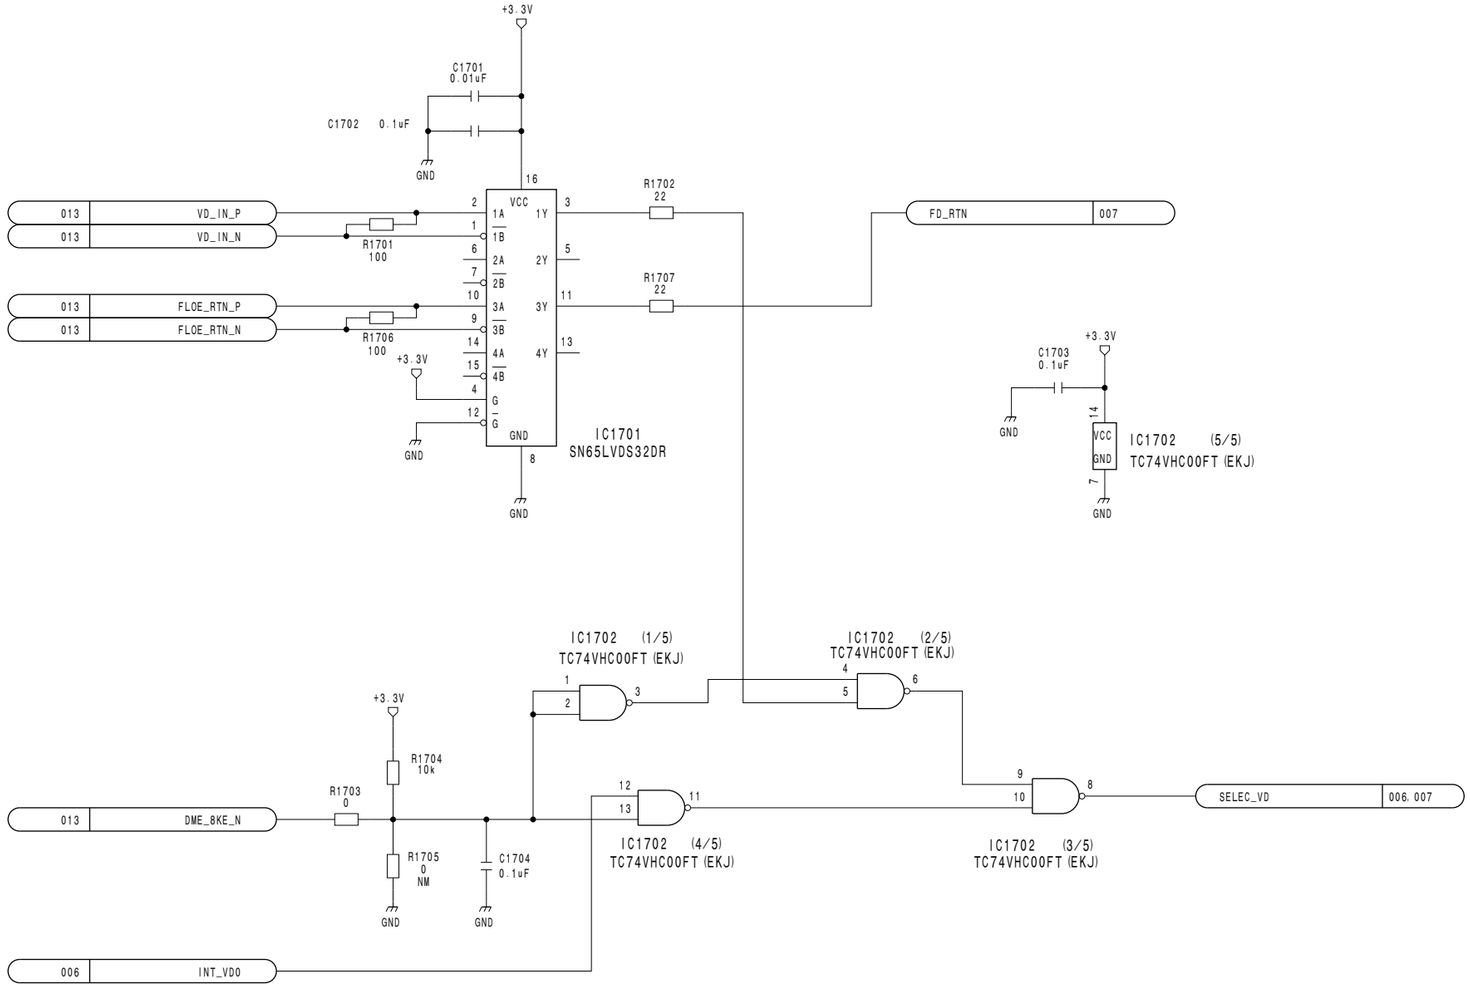



CPU Board
CA-54CFE (17/17)
BOARD NO. 1-686-445-24
MVS-6000_CA-54E_001_17


CN-3141 **SUFFIX: -11**

CNV1

		a	b	c	d	e	FG
CNV	11	RS422TX1P	RS422TX1N	GND	RS422RX1P	RS422RX1N	GND
	12	GND	GND	GND	GND	GND	GND
	13	RS422TX2P	RS422TX2N	GND	RS422RX2P	RS422RX2N	GND
	14	GND	GND	GND	GND	GND	GND
	15			GND			GND
	16	GND	GND	GND	GND	GND	GND
	17			GND			GND
	18	GND	GND	GND	GND	GND	GND
	19			GND			GND
	20	GND	GND	GND	GND	GND	GND
	21	DME_WB_3V	DME_WB_3V	GND			GND
	22	GND	GND	GND	GND	GND	GND
CNW	1	GND	GND	GND	GND	GND	GND
	2	ETH1TDP	ETH1TDN	GND	ETH1RDP	ETH1RDN	GND
	3	GND	GND	GND	GND	GND	GND
	4	ETH2TDP	ETH2TDN	GND	ETH2RDP	ETH2RDN	GND
	5	GND	GND	GND	GND	GND	GND
	6			GND			GND
	7	19		GND			GND
	8	20		GND			GND
	9	21		GND			GND
	10	22		GND			GND

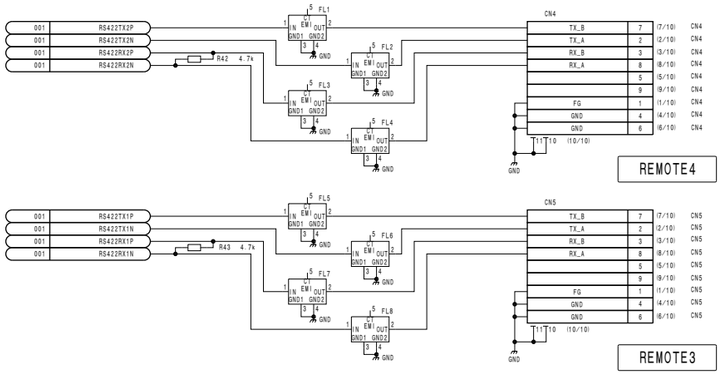


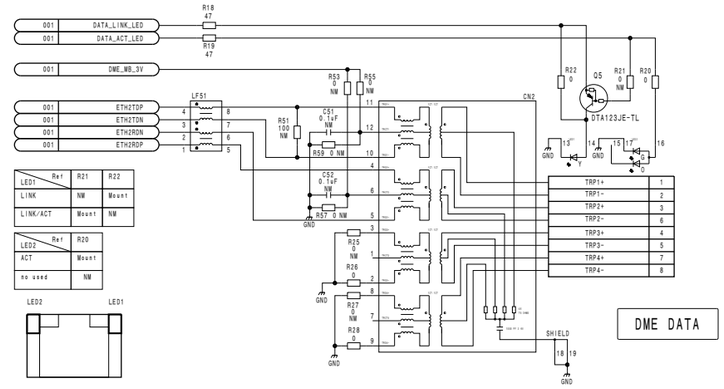


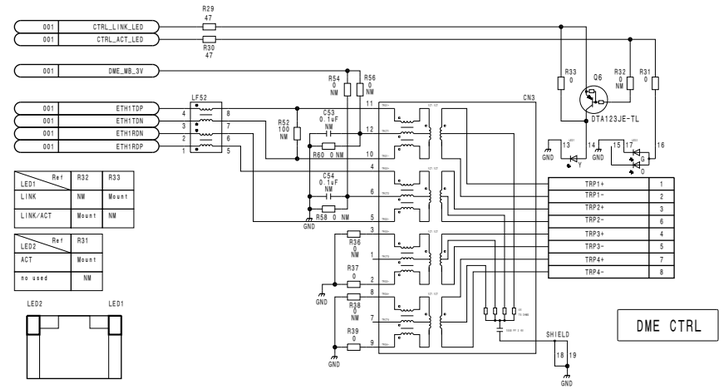

CNX1

	a	b	c	d	e	FG
1						GND
2						GND
3						GND
4						GND
5						GND
6			GND			GND
7						GND
8			GND			GND
9			GND			GND
10	CTRL_LINK_LED	CTRL_ACT_LED	GND	DATA_LINK_LED	DATA_ACT_LED	GND
11	G_ETH_LINK_LED	G_ETH_ACT_LED	GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16	G_ETH3P	G_ETH3N	GND	G_ETH4P	G_ETH4N	GND
17	G_ETH1P (ETH_TP)	G_ETH1N (ETH_TN)	GND	G_ETH2P (ETH_RP)	G_ETH2N (ETH_RN)	GND
18	(G_ETH_100M_LED)	G_ETH_1000M_LED	GND	(RESERVE)	(RESERVE)	GND
19	WY_1.8V	WY_1.8V	GND	(RESERVE)	(RESERVE)	GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

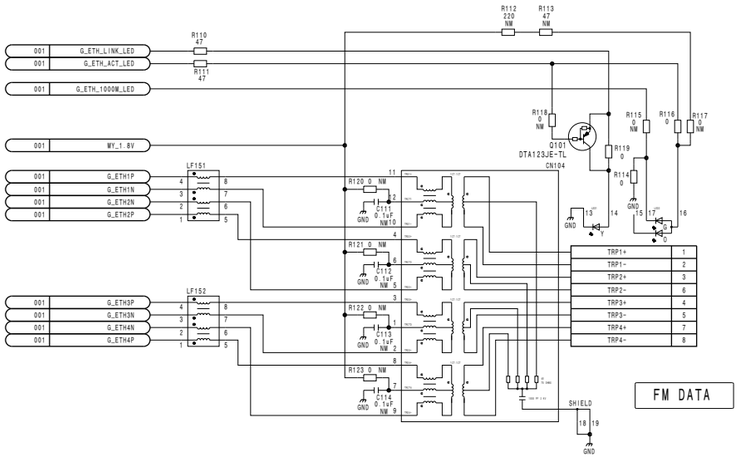



Control Board
CN-3141
BOARD NO. 1-877-217-11
MVS-6000_CN-3141_002_1

CN-3147 **SUFFIX: -11**

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	(RESET)	(DC_ENBL)		(FORMAT)	FUSE+12V	GND
6			GND (EXT_REAR)			GND
7						GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNV1


	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	GPIIN1	GPIIN2	GND	GPIIN3	GPIIN4	GND
3	GPIIN5	GPIIN6	GND	GPIIN7	GPIIN8	GND
4	GPIOUT1A	GPIOUT1B	GND	GPIOUT2A	GPIOUT2B	GND
5	GPIOUT3A	GPIOUT3B	GND	GPIOUT4A	GPIOUT4B	GND
6	GPIOUT5	GPIOUT6	GND	GPIOUT7	GPIOUT8	GND
7	GPICOM1	GPICOM2	GND			GND
8	GND	GND	GND	GND	GND	GND
9			GND			GND
10	GND	GND	GND	GND	GND	GND
11	RS422TX1P	RS422TX1N	GND	RS422RX1P	RS422RX1N	GND
12	GND	GND	GND	GND	GND	GND
13	RS422TX2P	RS422TX2N	GND	RS422RX2P	RS422RX2N	GND
14	GND	GND	GND	GND	GND	GND
15			GND			GND
16	GND	GND	GND	GND	GND	GND
17			GND			GND
18	GND	GND	GND	GND	GND	GND
19			GND			GND
20	GND	GND	GND	GND	GND	GND
21	WB_3V	WB_3V	GND	WB_SCL	WB_SDA	GND
22	GND	GND	GND	GND	GND	GND


CNW1


	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	ETH1TDP	ETH1TDN	GND	ETH1RDP	ETH1RDN	GND
3	GND	GND	GND	GND	GND	GND
4	ETH2TDP	ETH2TDN	GND	ETH2RDP	ETH2RDN	GND
5	GND	GND	GND	GND	GND	GND
6			GND			GND
7			GND			GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNY1


	a	b	c	d	e	FG
1	GND	GND	GND	GND	GND	GND
2	GND	REF_IN_FC1	GND	GND	REF_IN_BB	GND
3	GND	GND	GND	GND	GND	GND
4	GND	REF_IN_FC2	GND	GND	(REF_OUT)	GND
5	GND	GND	GND	GND	GND	GND
6			GND			GND
7			GND			GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12			GND			GND
13			GND			GND
14			GND			GND
15			GND			GND
16	CTRL_LINK_LED	CTRL_ACT_LED	GND	DATA_LINK_LED	DATA_ACT_LED	GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND

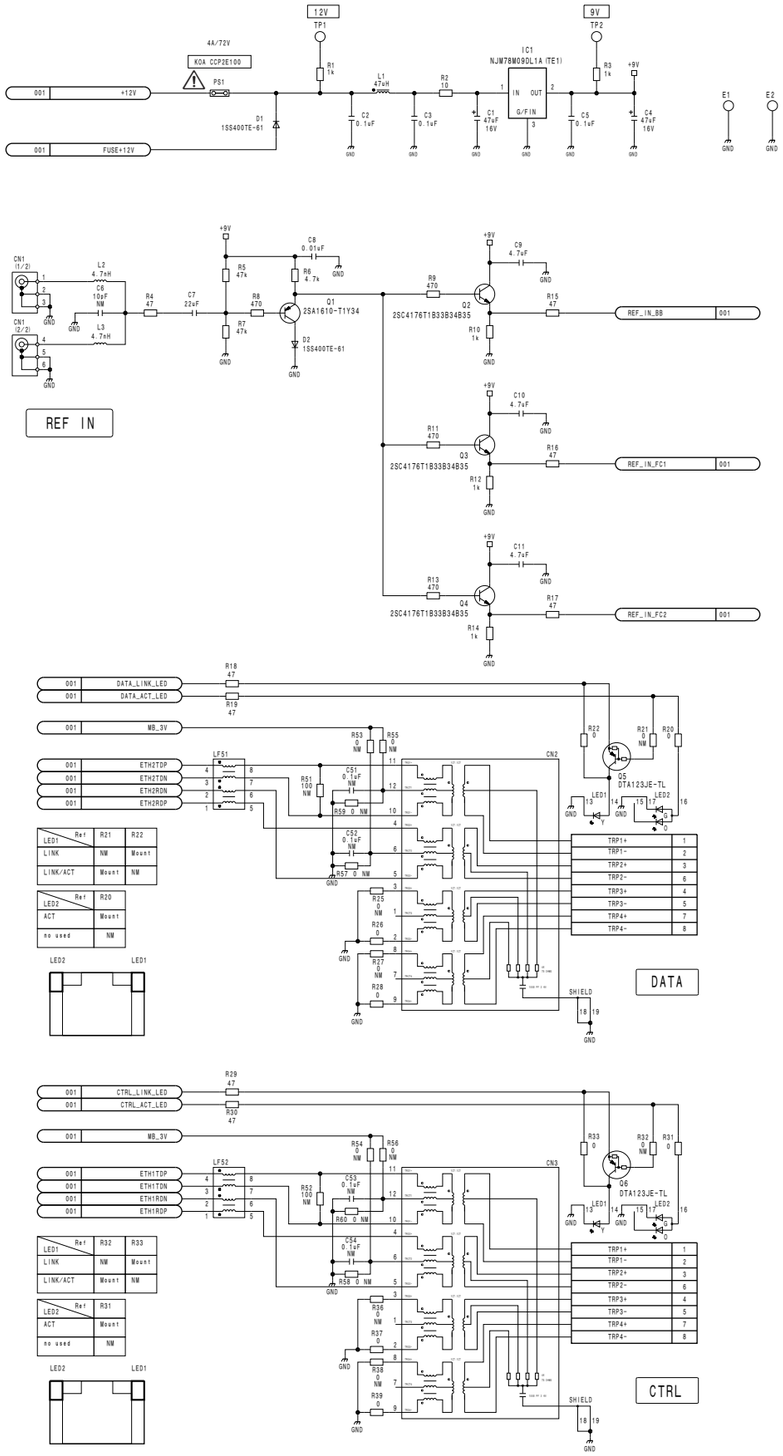


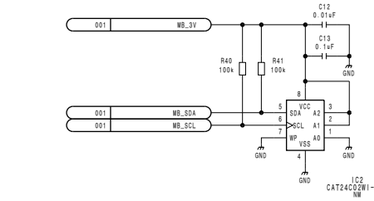


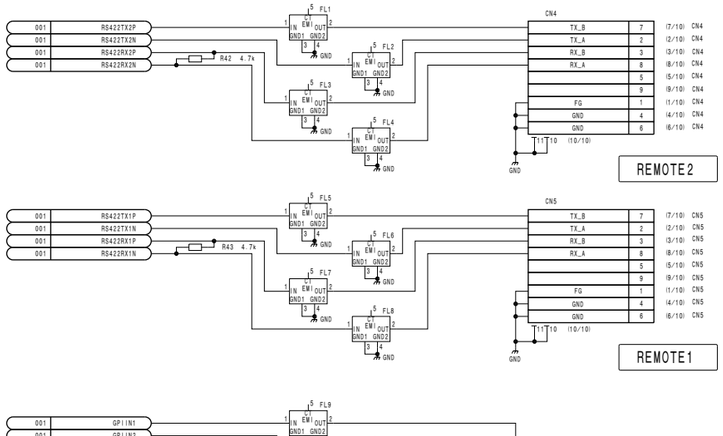

Control Board
CN-3147
BOARD NO. 1-877-422-11
MVS-6000_CN-3147_002_1

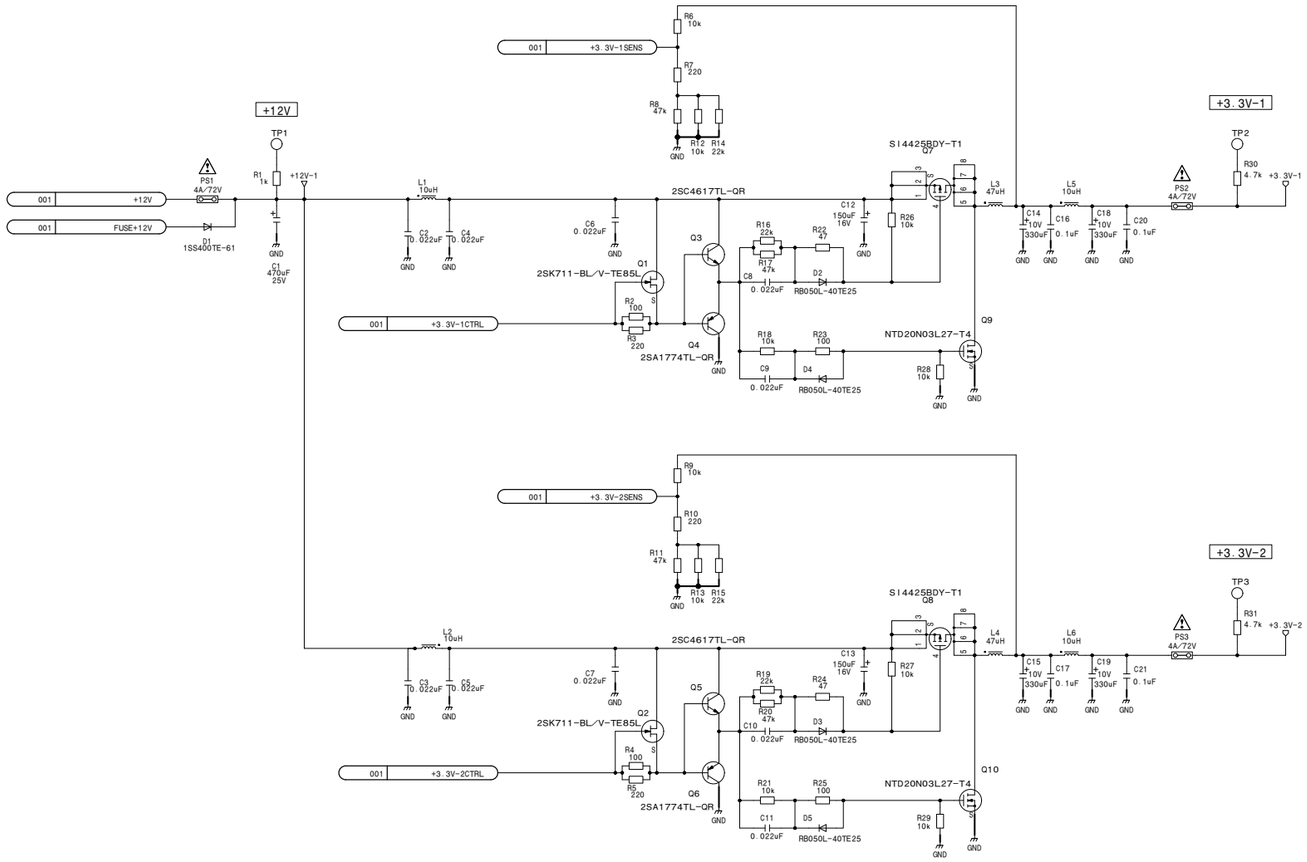

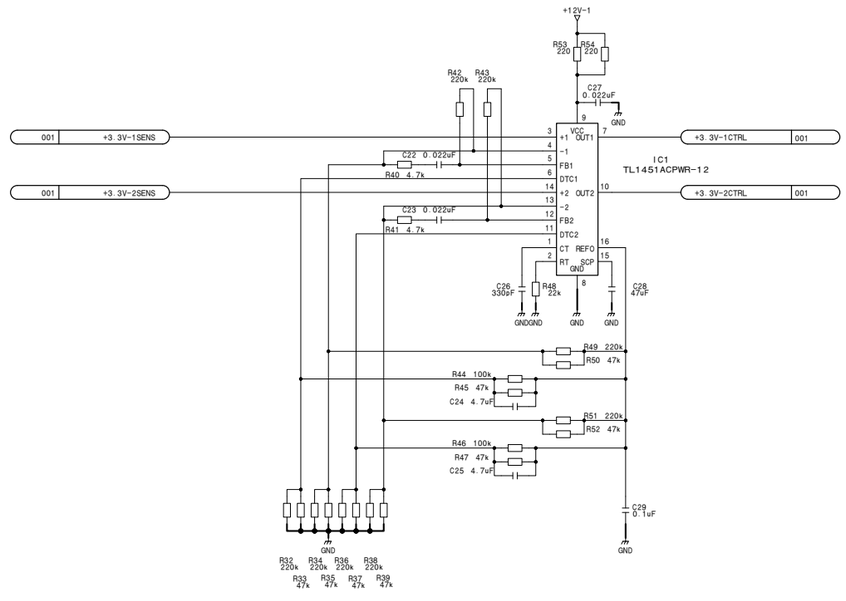





CNT1

	a	b	c	d	e	FG
1	+12V	+12V	NC	+12V	+12V	GND
2	+12V	+12V	NC	+12V	+12V	GND
3	+12V	+12V	NC	+12V	+12V	GND
4	+12V	+12V	NC	+12V	+12V	GND
5	RESET_L	DC_ENBL			FUSE+12V	GND
6			GND			GND
7						GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNV2


	a	b	c	d	e	FG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5	DIN09BP	DIN09BN	GND	DIN17BP	DIN17BN	GND
6	DIN08BP	DIN08BN	GND	DIN16BP	DIN16BN	GND
7	DIN07BP	DIN07BN	GND	DIN15BP	DIN15BN	GND
8	DIN06BP	DIN06BN	GND	DIN14BP	DIN14BN	GND
9	DIN05BP	DIN05BN	GND	DIN13BP	DIN13BN	GND
10	DIN04BP	DIN04BN	GND	DIN12BP	DIN12BN	GND
11	DIN03BP	DIN03BN	GND	DIN11BP	DIN11BN	GND
12	DIN02BP	DIN02BN	GND	DIN10BP	DIN10BN	GND
13	DIN01BP	DIN01BN	GND			GND
14			GND			GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND

CNX3


	a	b	c	d	e	FG
1	DIN17AP	DIN17AN	GND	DIN09AP	DIN09AN	GND
2	DIN16AP	DIN16AN	GND	DIN08AP	DIN08AN	GND
3	DIN15AP	DIN15AN	GND	DIN07AP	DIN07AN	GND
4	DIN14AP	DIN14AN	GND	DIN06AP	DIN06AN	GND
5	DIN13AP	DIN13AN	GND	DIN05AP	DIN05AN	GND
6	DIN12AP	DIN12AN	GND	DIN04AP	DIN04AN	GND
7	DIN11AP	DIN11AN	GND	DIN03AP	DIN03AN	GND
8	DIN10AP	DIN10AN	GND	DIN02AP	DIN02AN	GND
9			GND	DIN01AP	DIN01AN	GND
10			GND			GND
11			GND			GND

17-Input Board
CNI-32 (1/3)
BOARD NO. 1-871-704-11
MVS-8000G_CNI-32_001_1


CH 1

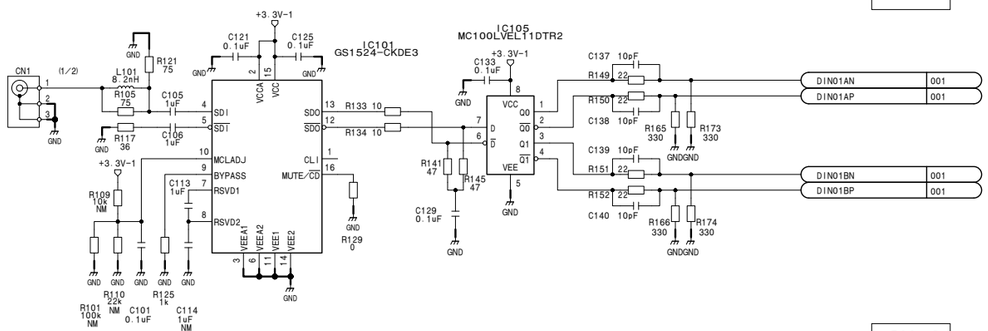


CH 2

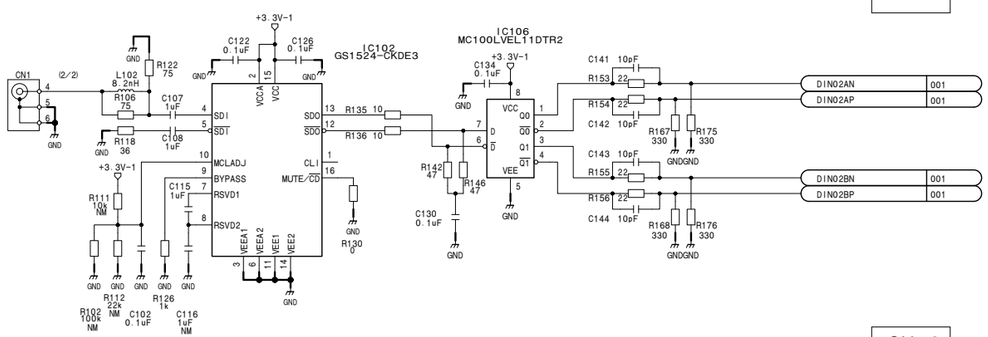


CH 3

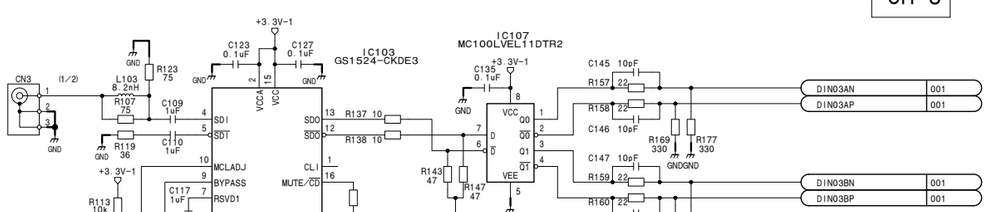


CH 4

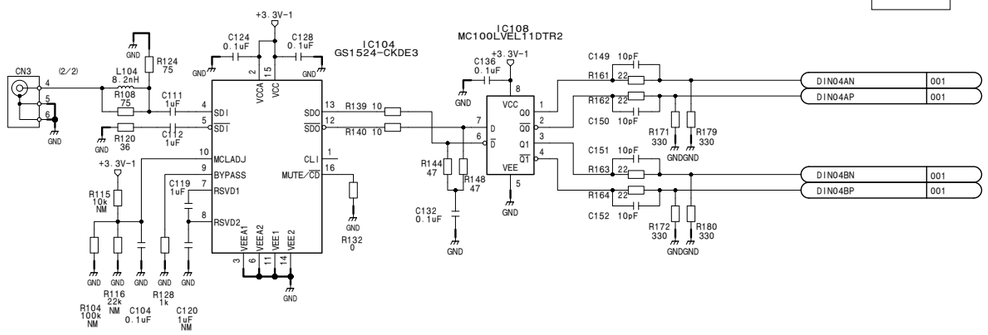


CH 5

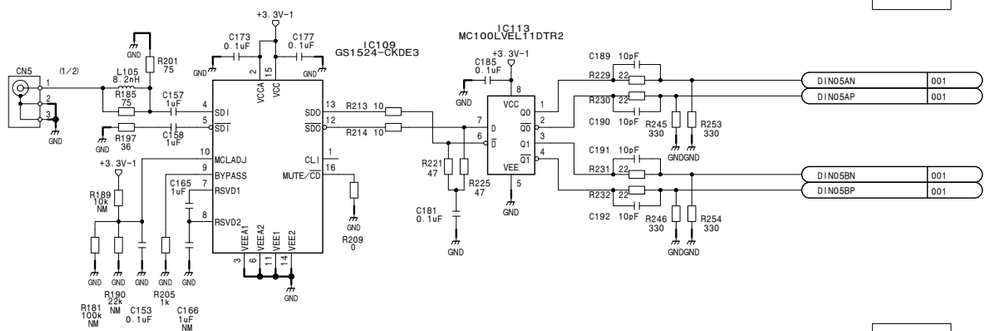


CH 6

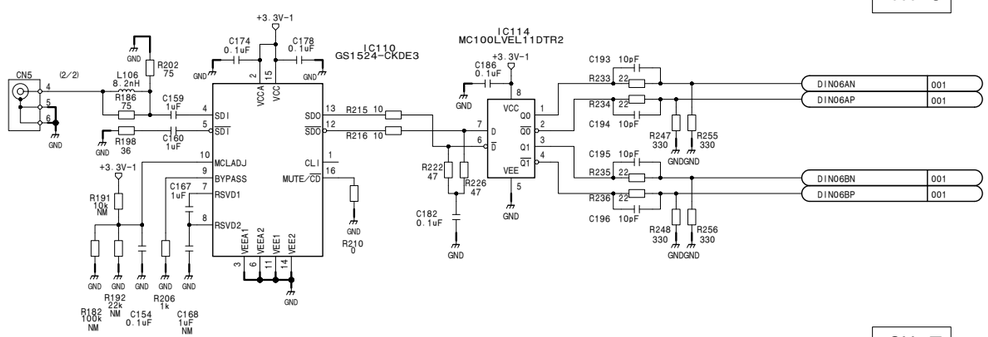

CH 7

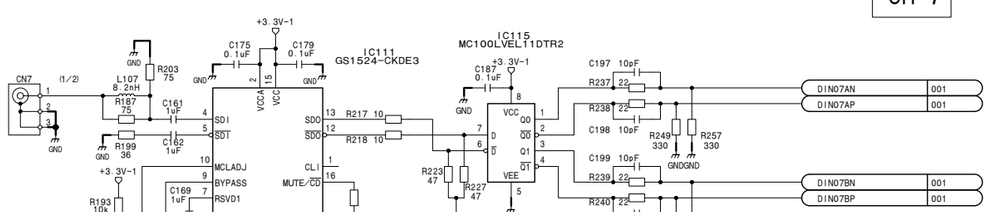


CH 8

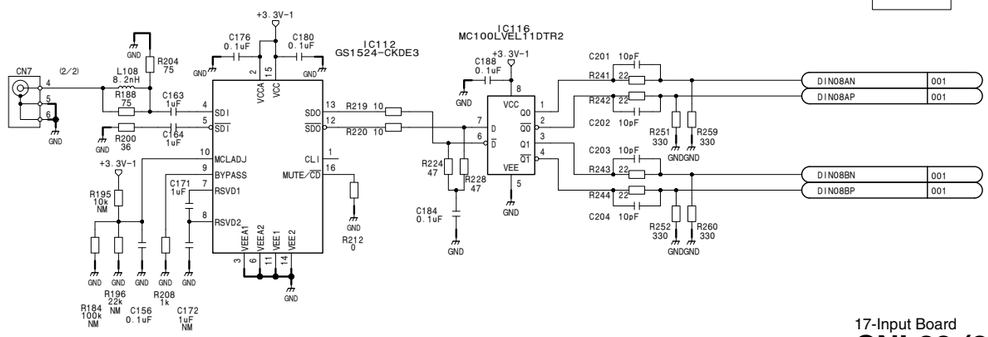


17-Input Board
CNI-32 (2/3)
BOARD NO. 1-871-704-11
MVS-8000G_CNI-32_001_2


CH 9

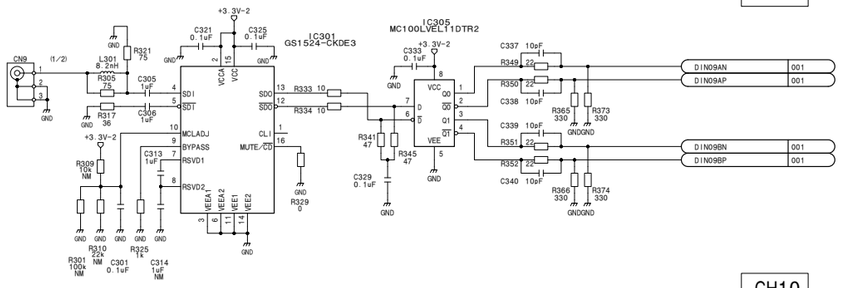


CH10

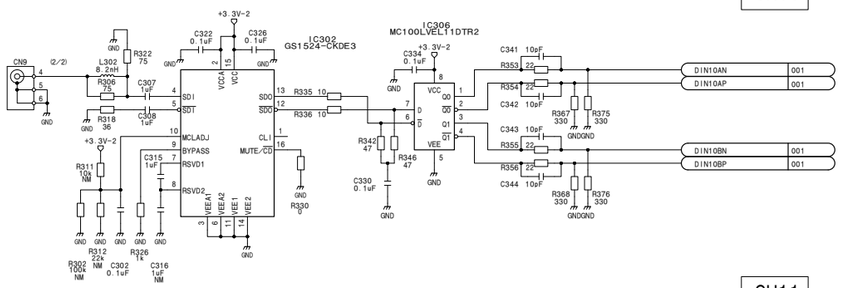


CH11

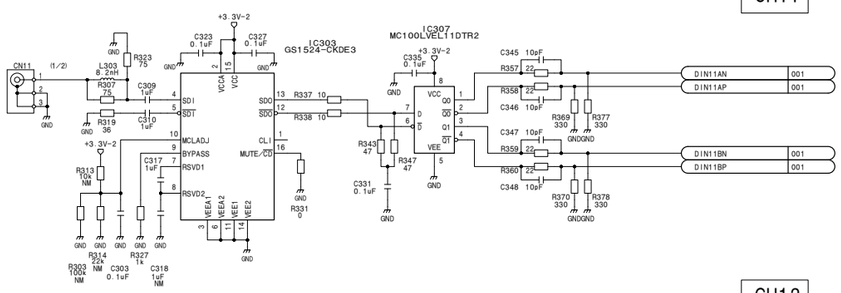


CH12

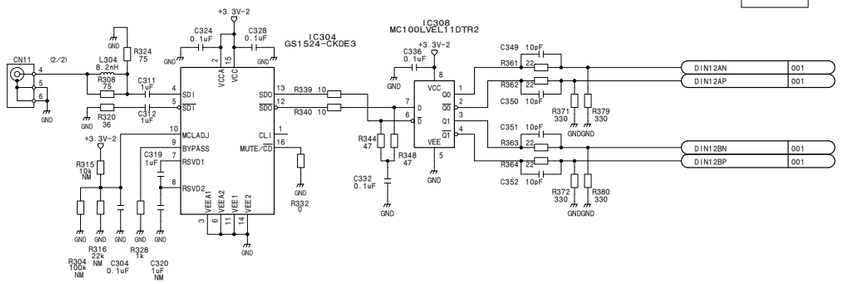


CH13

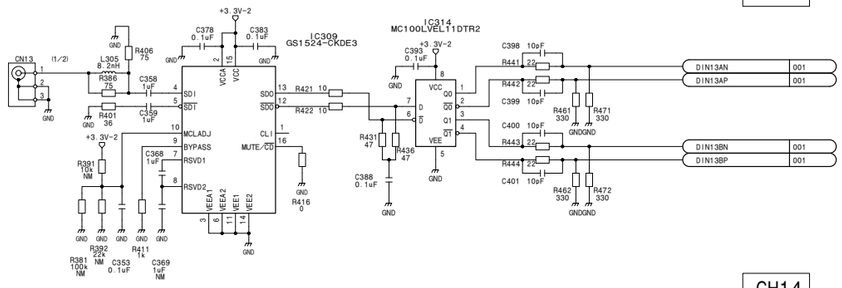


CH14

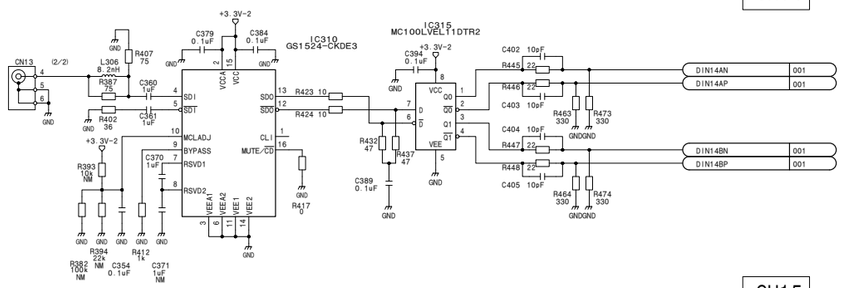


CH15

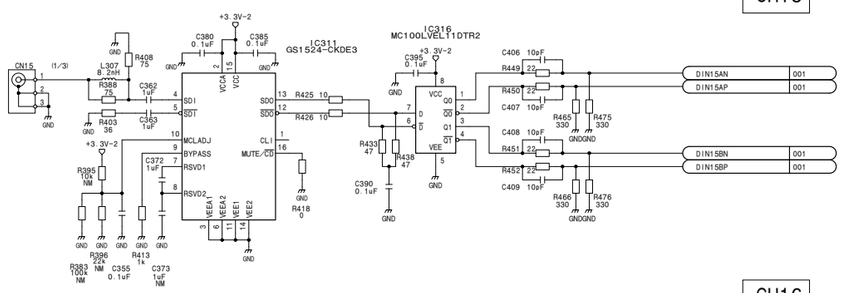


CH16

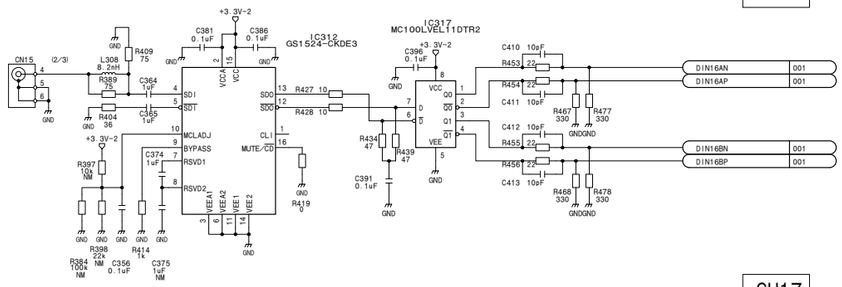



CH17

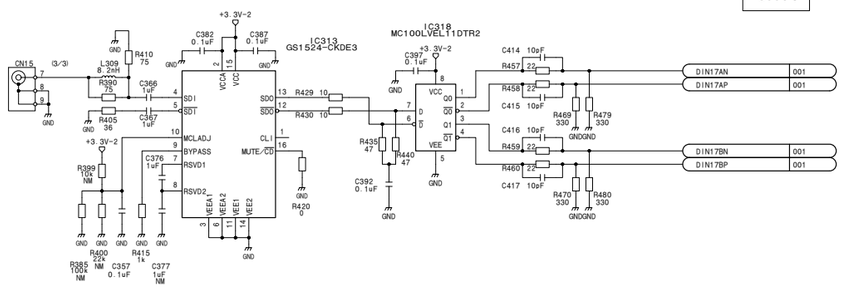

17-Input Board
CNI-32 (3/3)
BOARD NO. 1-871-704-11
MVS-8000G_CNI-32_001_3

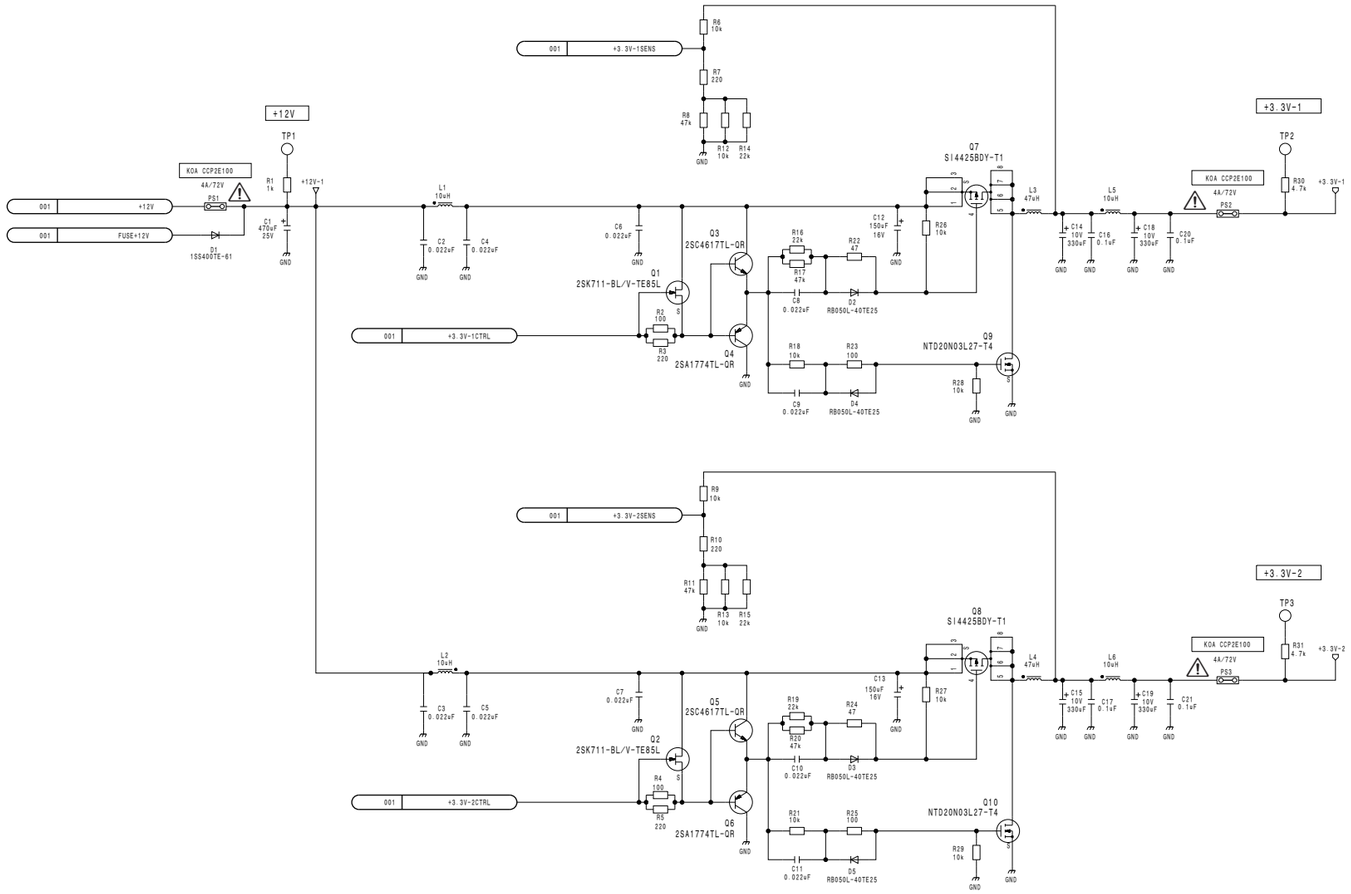

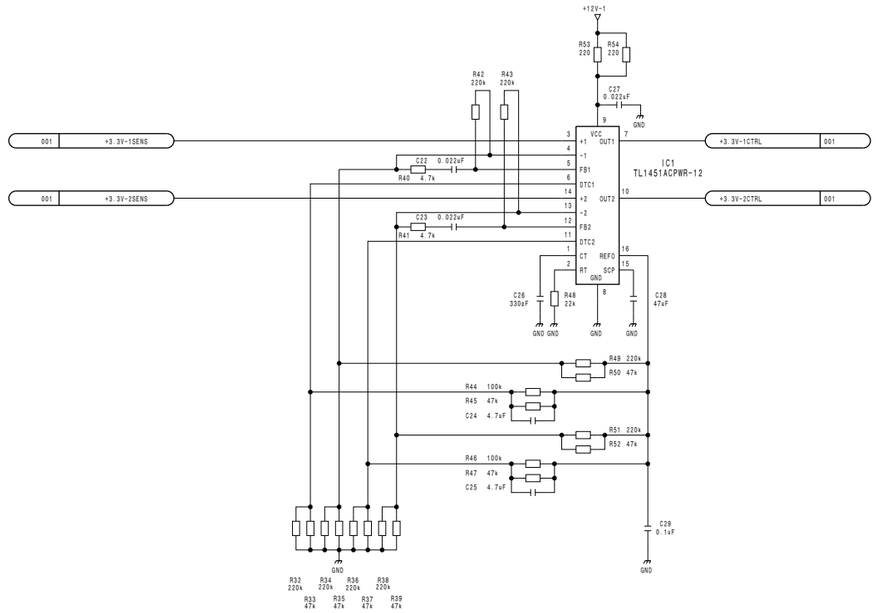





CNT1


	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_L	DC_ENBL		FORMAT	FUSE+12V	GND
6	SLOT ID 7	SLOT ID 6	GND	SLOT ID 5	SLOT ID 4	GND
7	SLOT ID 3	SLOT ID 2		SLOT ID 1	SLOT ID 0	GND
8	INET_WTAP	INET_WTAN	GND	INET_WTBP	INET_WTBN	GND
9	INET_WYTAP	INET_WYTAN	GND	INET_WYTBP	INET_WYTBN	GND
10			GND			GND
11	G_ETH_LINK_LED	G_ETH_ACT_LED	GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16	G_ETH3P	G_ETH3N	GND	G_ETH4P	G_ETH4N	GND
17	G_ETH1TDP	G_ETH1TDN	GND	G_ETH1RDP	G_ETH1RDN	GND
18	(G_ETH_100M_LED)	G_ETH_1000M_LED	GND	(RESERVE)	(RESERVE)	GND
19	MY_1.8V	MY_1.8V	GND	(RESERVE)	(RESERVE)	GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNV2

	a	b	c	d	e	FG
1	SEL7	SEL8	GND			GND
2	SEL5	SEL6	GND			GND
3	SEL3	SEL4	GND			GND
4	SEL1	SEL2	GND			GND
5	DIN09P	DIN09N	GND			GND
6	DIN08P	DIN08N	GND			GND
7	DIN07P	DIN07N	GND	DIN15P	DIN15N	GND
8	DIN06P	DIN06N	GND	DIN14P	DIN14N	GND
9	DIN05P	DIN05N	GND	DIN13P	DIN13N	GND
10	DIN04P	DIN04N	GND	DIN12P	DIN12N	GND
11	DIN03P	DIN03N	GND	DIN11P	DIN11N	GND
12	DIN02P	DIN02N	GND	DIN10P	DIN10N	GND
13	DIN01P	DIN01N	GND			GND
14	FCVOUT8P	FCVOUT8N	GND	FCVIN8P	FCVIN8N	GND
15	FCVOUT7P	FCVOUT7N	GND	FCVIN7P	FCVIN7N	GND
16	FCVOUT6P	FCVOUT6N	GND	FCVIN6P	FCVIN6N	GND
17	FCVOUT5P	FCVOUT5N	GND	FCVIN5P	FCVIN5N	GND
18	FCVOUT4P	FCVOUT4N	GND	FCVIN4P	FCVIN4N	GND
19	FCVOUT3P	FCVOUT3N	GND	FCVIN3P	FCVIN3N	GND
20	FCVOUT2P	FCVOUT2N	GND	FCVIN2P	FCVIN2N	GND
21	FCVOUT1P	FCVOUT1N	GND	FCVIN1P	FCVIN1N	GND
22			GND			GND


15-Input Board
CNI-35 (1/3)
BOARD NO. 1-877-216-11
MVS-6000_CNI-35_001_1


CNI-35 (2/3)
SUFFIX: -11

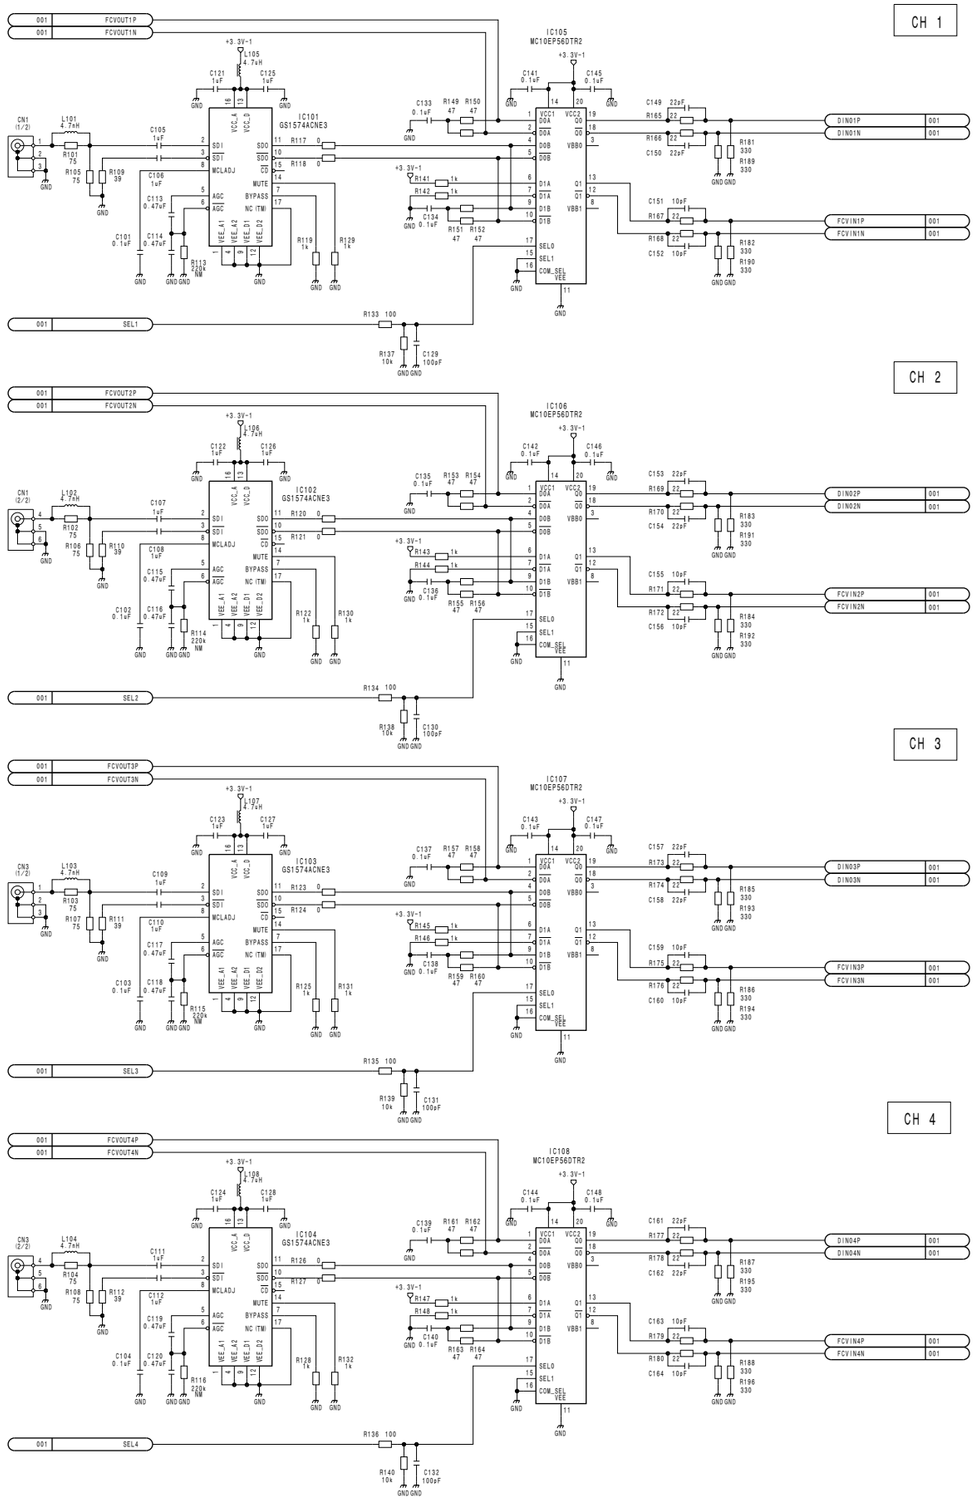



15-Input Board
CNI-35 (2/3)
BOARD NO. 1-877-216-11
MVS-6000_CNI-35_001_2


CNI-35 (3/3)
SUFFIX: -11

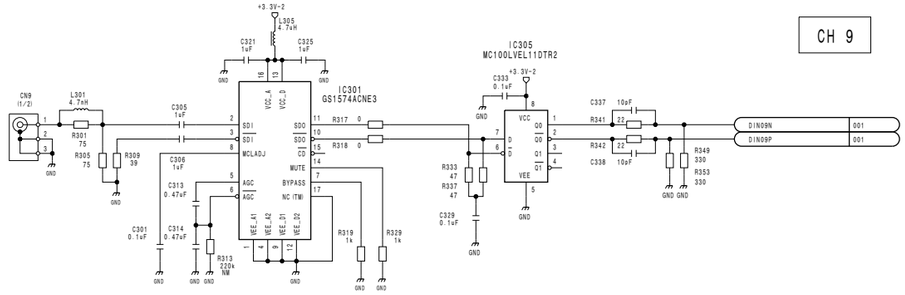


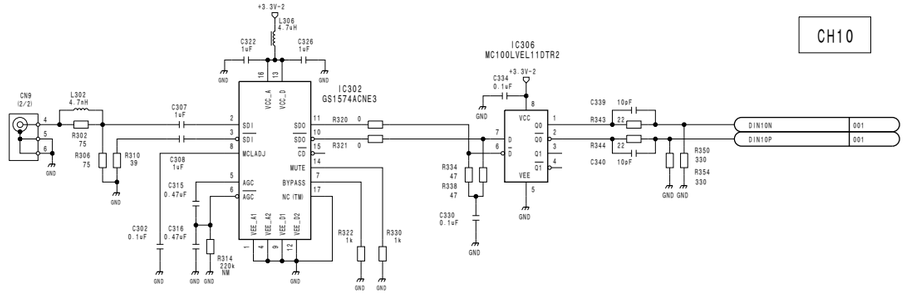


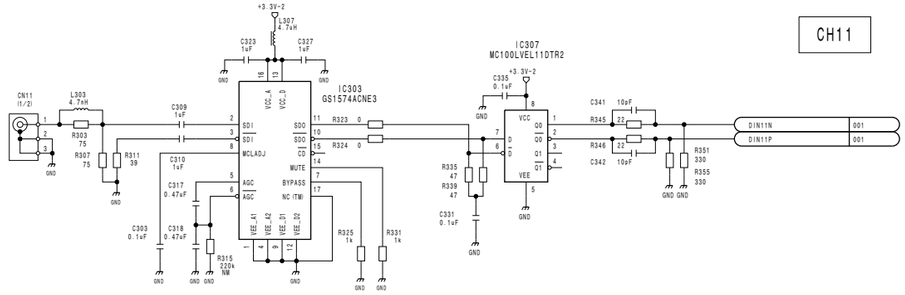


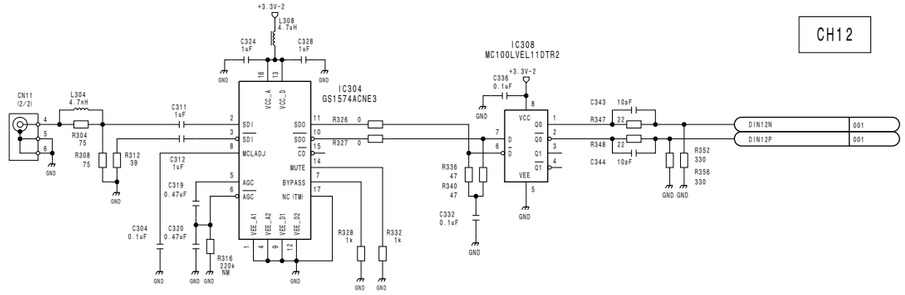

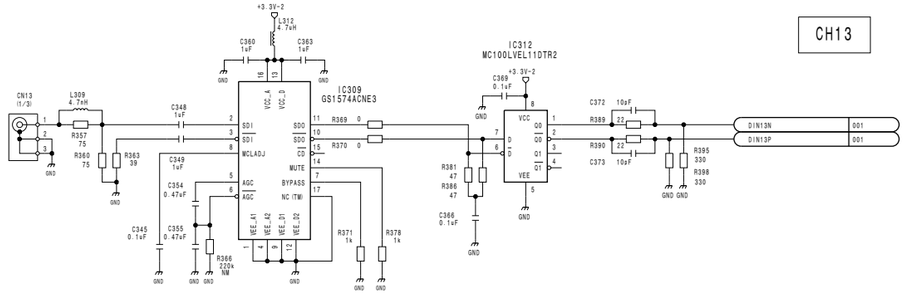

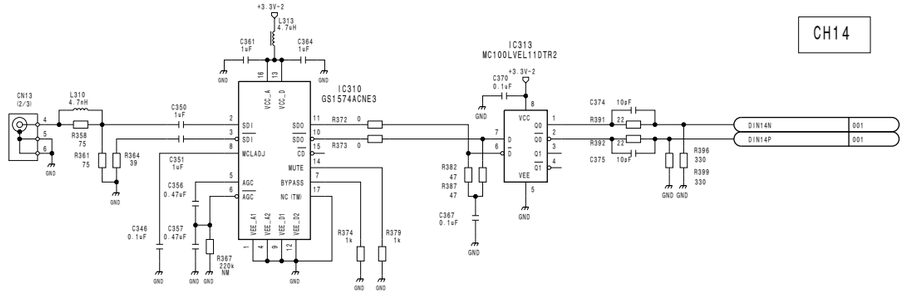

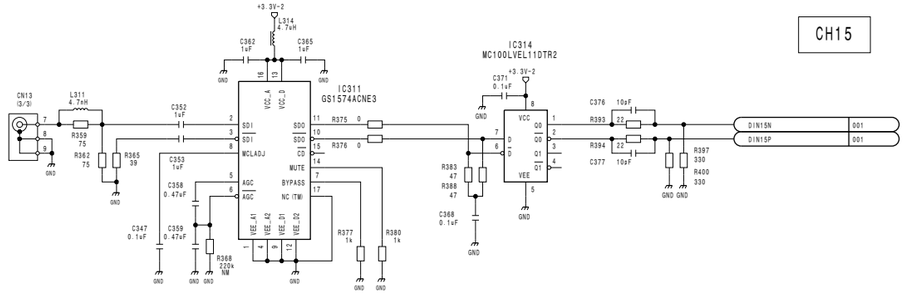


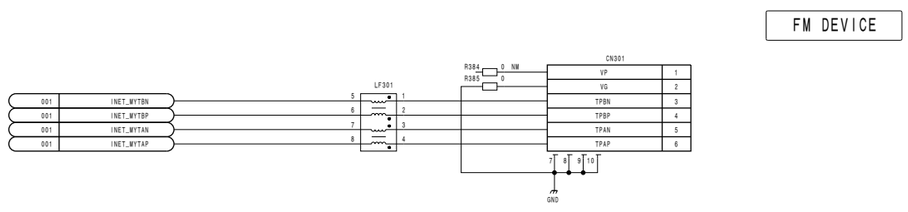



15-Input Board
CNI-35 (3/3)
BOARD NO. 1-877-216-11
MVS-6000_CNI-35_001_3


CNO-24 (1/4)
SUFFIX: -11

CNO-24 (1/4)
SUFFIX: -11

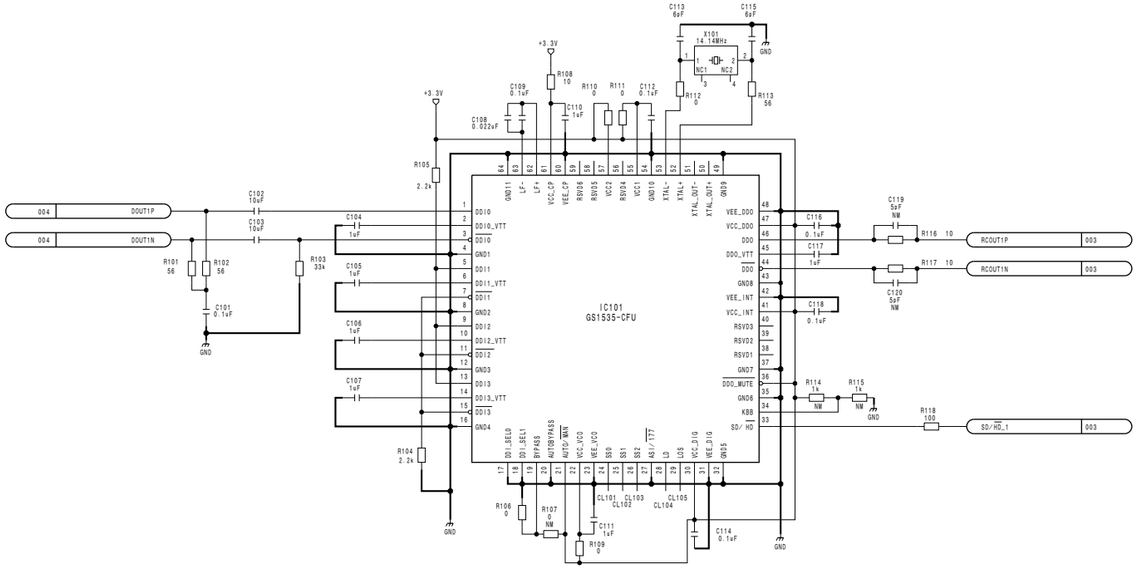

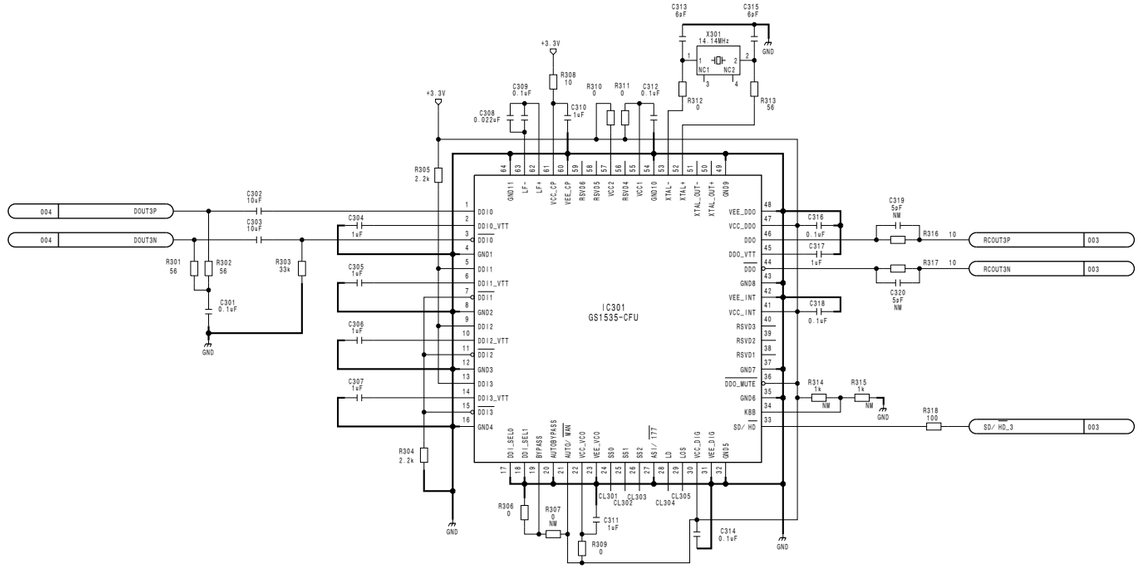

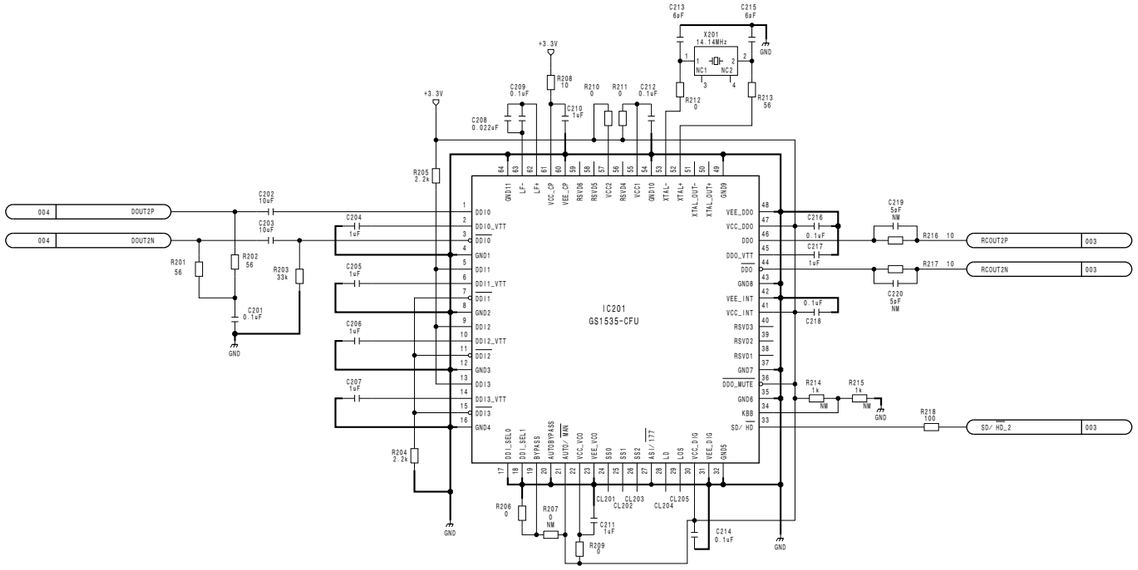


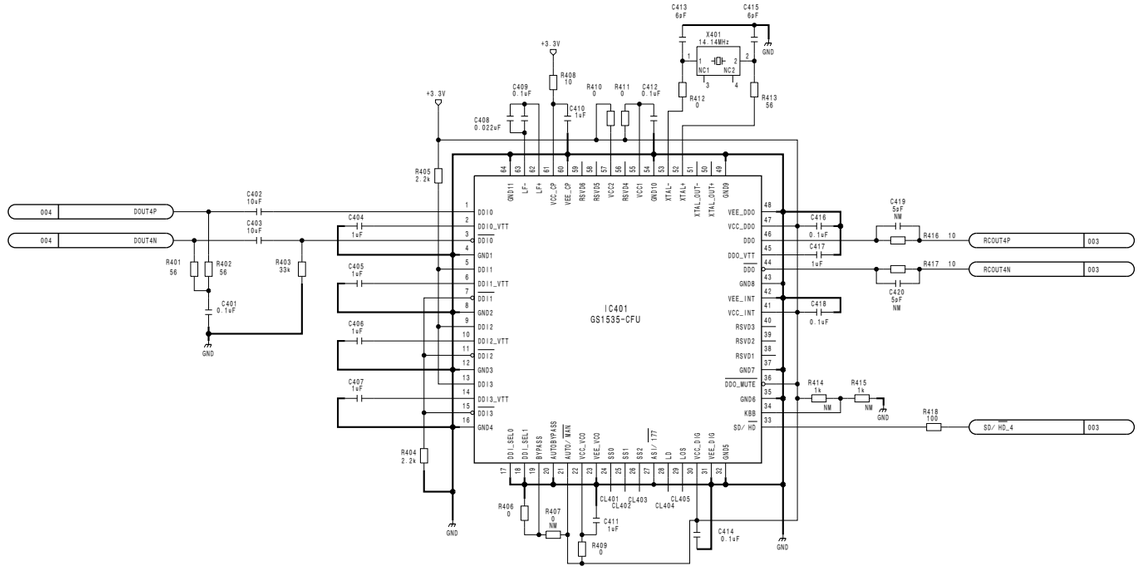



Monitor Output Board
CNO-24 (1/4)
BOARD NO. 1-686-455-11
SJXA-384_CNO-24_005_1


CNO-24 (2/4)
SUFFIX: -11

CNO-24 (2/4)
SUFFIX: -11

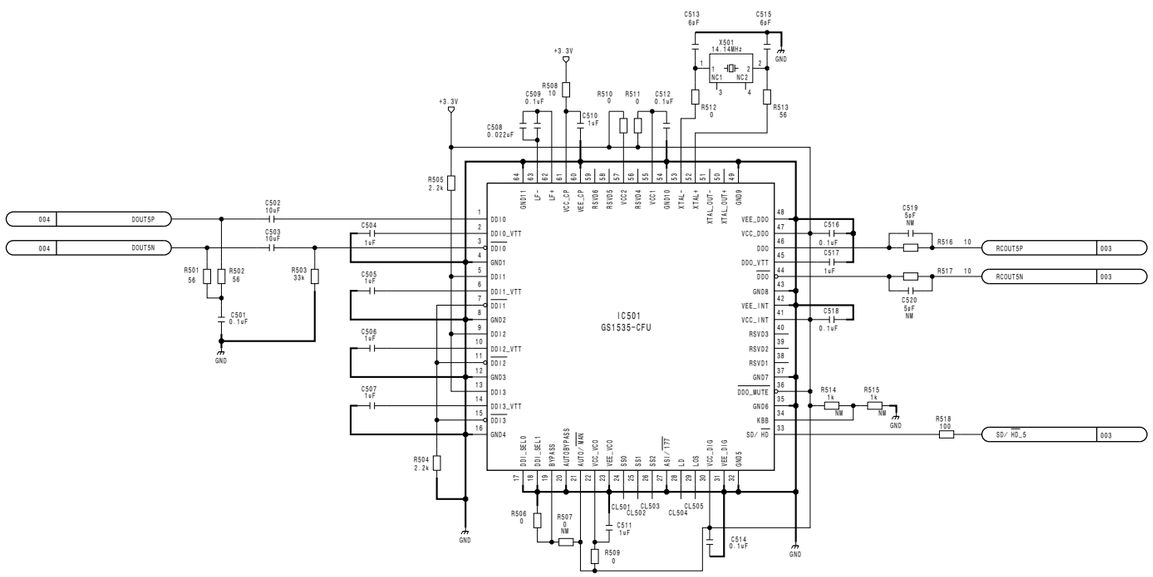

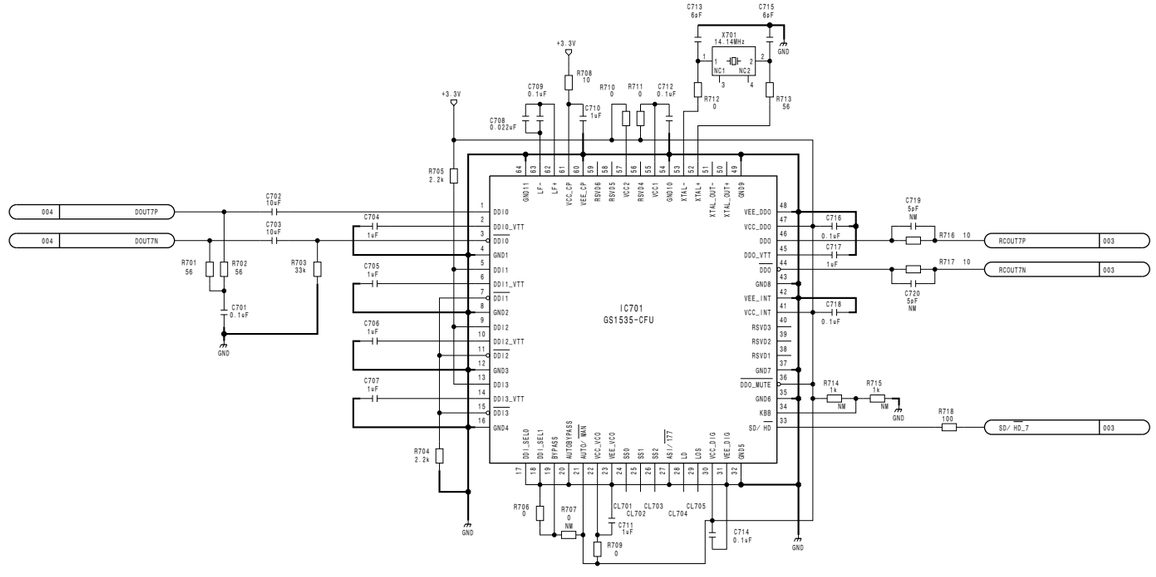

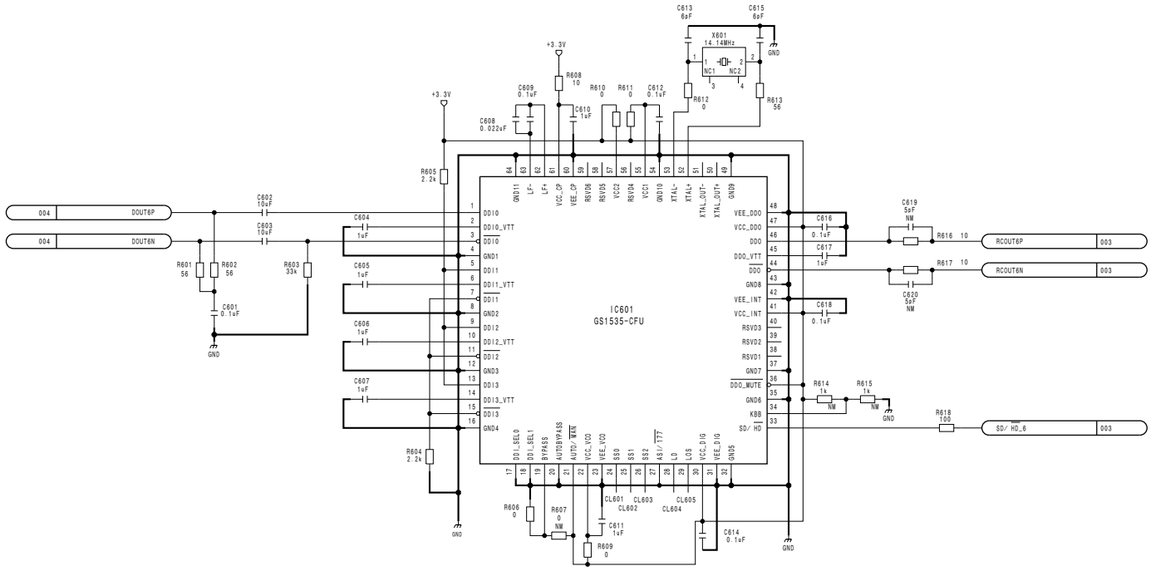


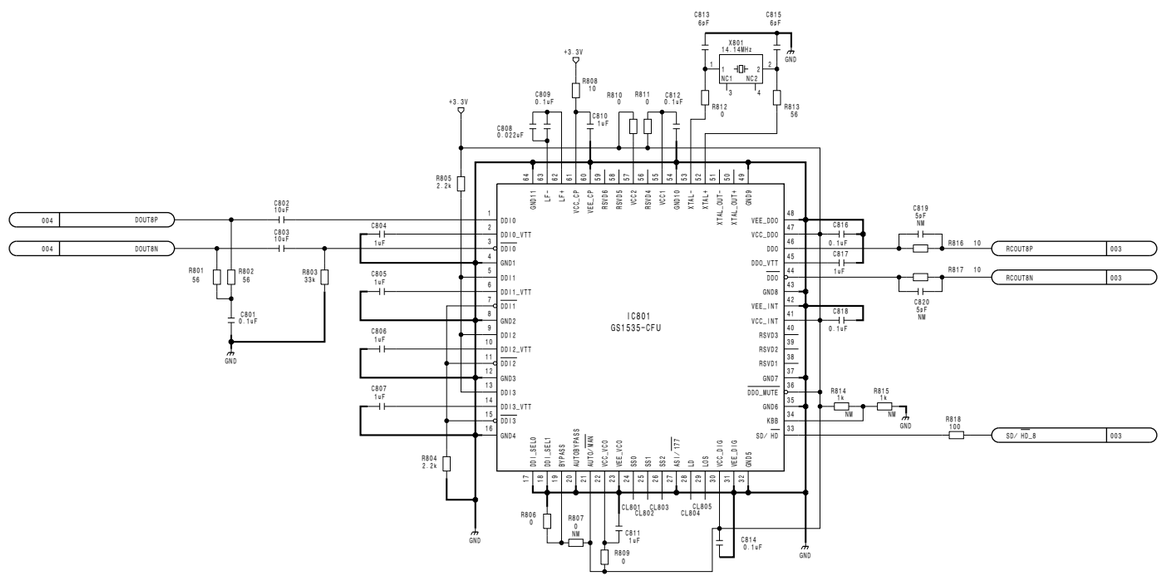



Monitor Output Board
CNO-24 (2/4)
BOARD NO. 1-686-455-11
SJXA-384_CNO-24_005_2


CNO-24 (3/4)
SUFFIX: -11


CNO-24 (3/4)
SUFFIX: -11

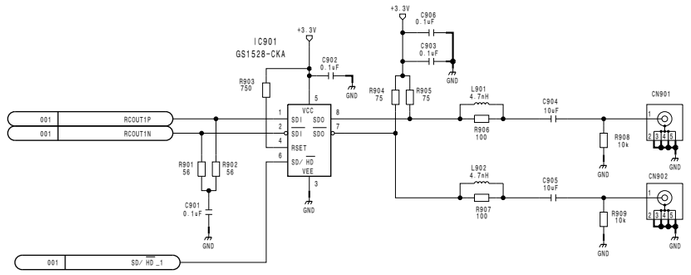


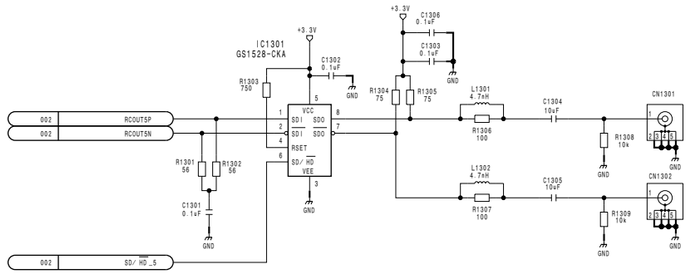


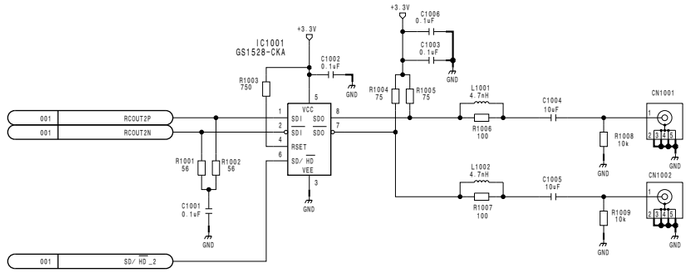


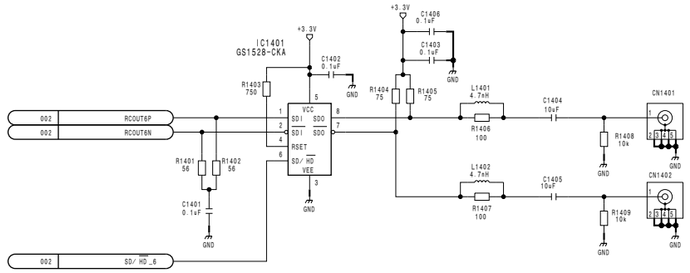

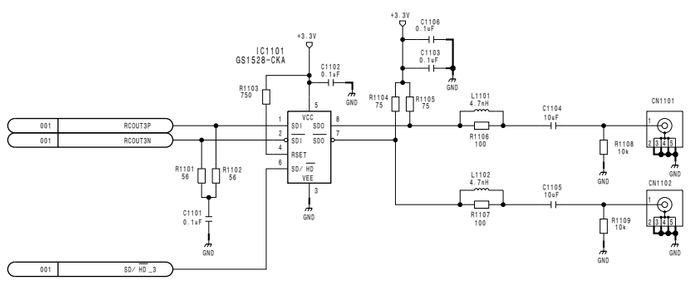

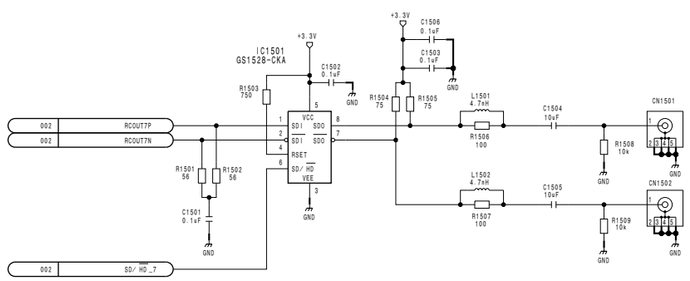

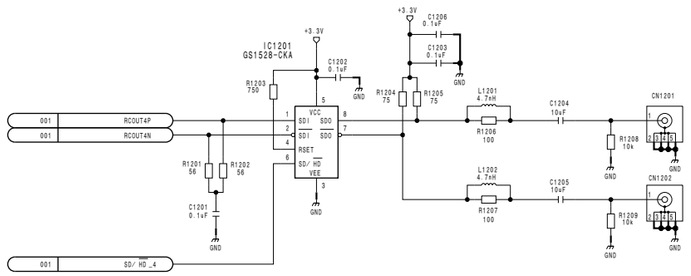


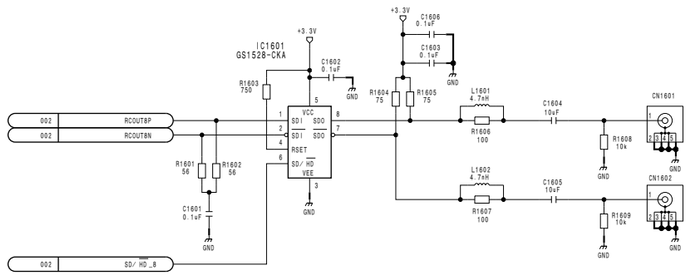

Monitor Output Board
CNO-24 (3/4)
BOARD NO. 1-686-455-11
SJXA-384_CNO-24_005_3

CNO-24 (4/4)
SUFFIX: -11

CNO-24 (4/4)
SUFFIX: -11

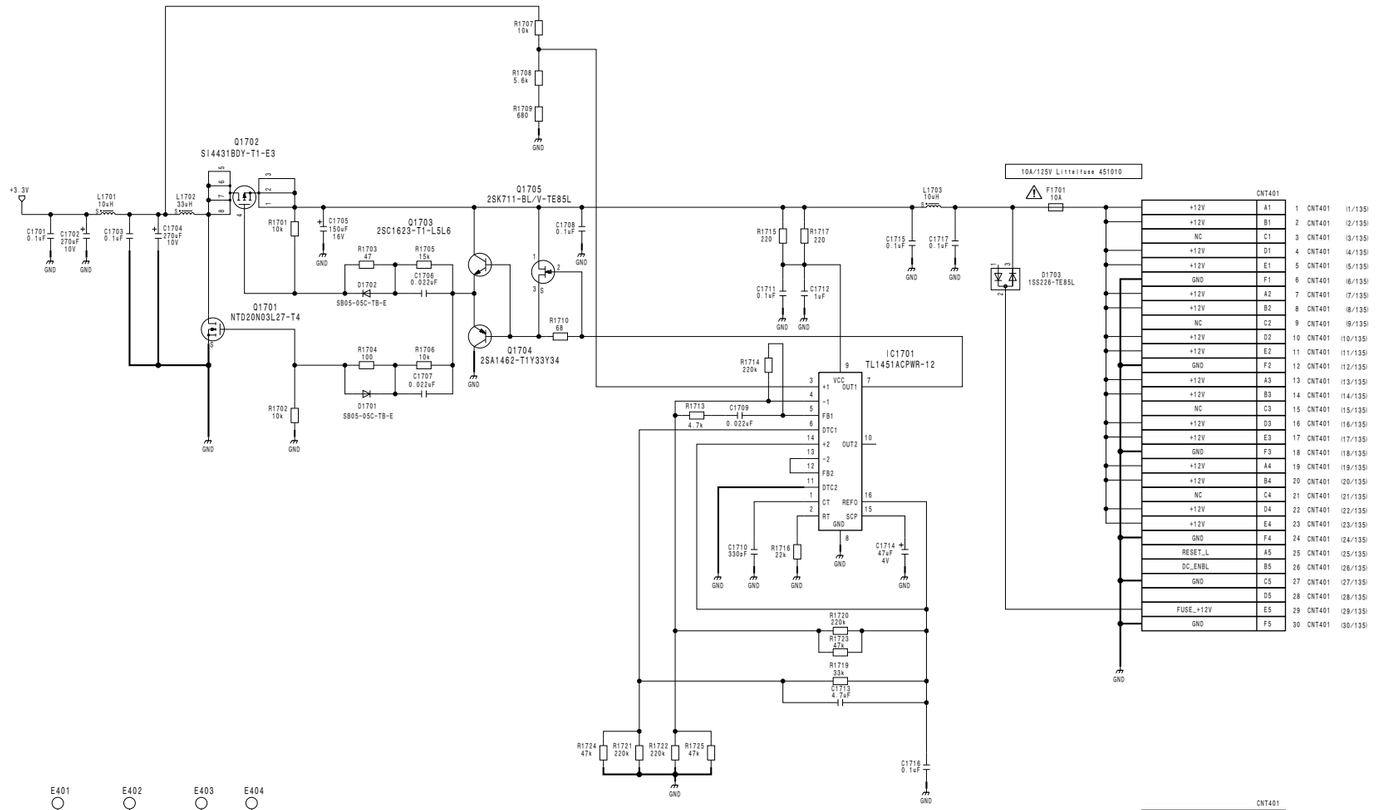

CNY402

	a	b	c	d	e	FG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5			GND			GND
6			GND			GND
7			GND			GND
8	DOUT4P	DOUT4N	GND			GND
9			GND			GND
10	DOUT3P	DOUT3N	GND			GND
11			GND			GND
12	DOUT2P	DOUT2N	GND			GND
13			GND			GND
14	DOUT1P	DOUT1N	GND			GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND

Monitor Output Board
CNO-24 (4/4)
BOARD NO. 1-686-455-11
SJXA-384_CNO-24_005_4


CNO-35 (1/2)
SUFFIX: -11

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	IRESET	IDC_ENBL		IFORMAT	FUSE+12V	GND
6			GND IEXT_REAR			GND
7						GND
8			GND			GND
9			GND			GND
10	SD/$\overline{HD}$_FC1	SD/$\overline{HD}$_FC2	GND		SD/$\overline{HD}$	GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNX1

	a	b	c	d	e	FG
1	SDO11P	SDO11N	GND	SDO12P	SDO12N	GND
2			GND			GND
3	SDO9P	SDO9N	GND	SDO10P	SDO10N	GND
4			GND			GND
5	SDO7P	SDO7N	GND	SDO8P	SDO8N	GND
6			GND			GND
7	SDO5P	SDO5N	GND	SDO6P	SDO6N	GND
8			GND			GND
9	SDO3P	SDO3N	GND	SDO4P	SDO4N	GND
10	SDOFC1P	SDOFC1N	GND	SDOFC2P	SDOFC2N	GND
11	SDO1P	SDO1N	GND	SDO2P	SDO2N	GND

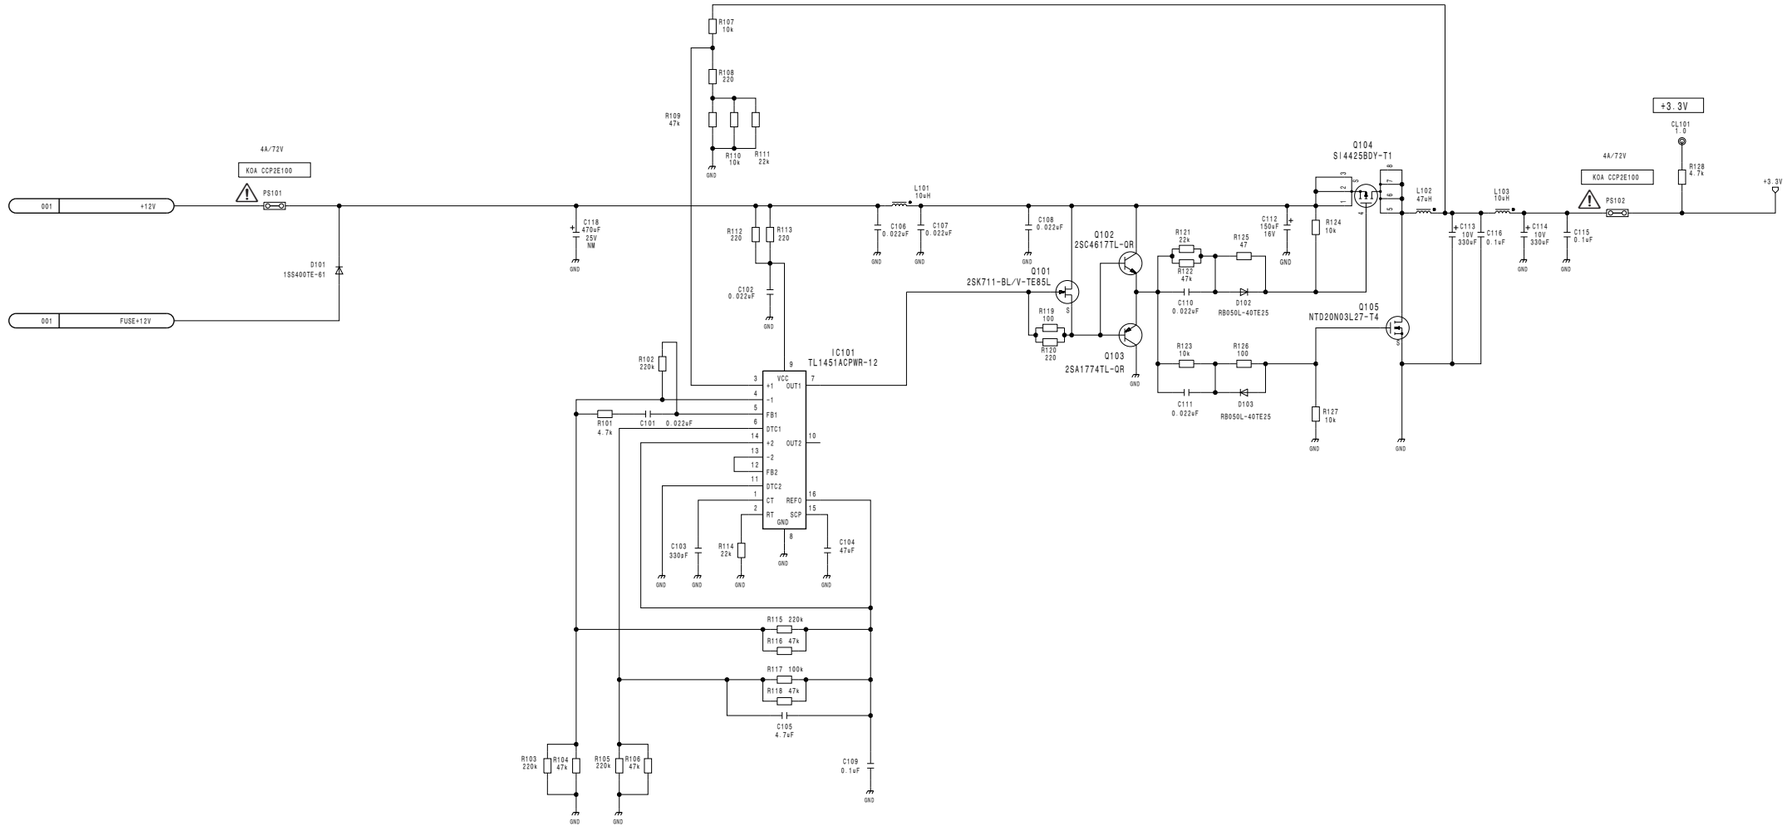


Output Board
CNO-35 (1/2)
BOARD NO. 1-877-214-11
MVS-6000_CNO-35_001_1

4-70

MVS-6000 MM

CNO-35 (2/2)
SUFFIX: -11

CNO-35 (2/2)
SUFFIX: -11

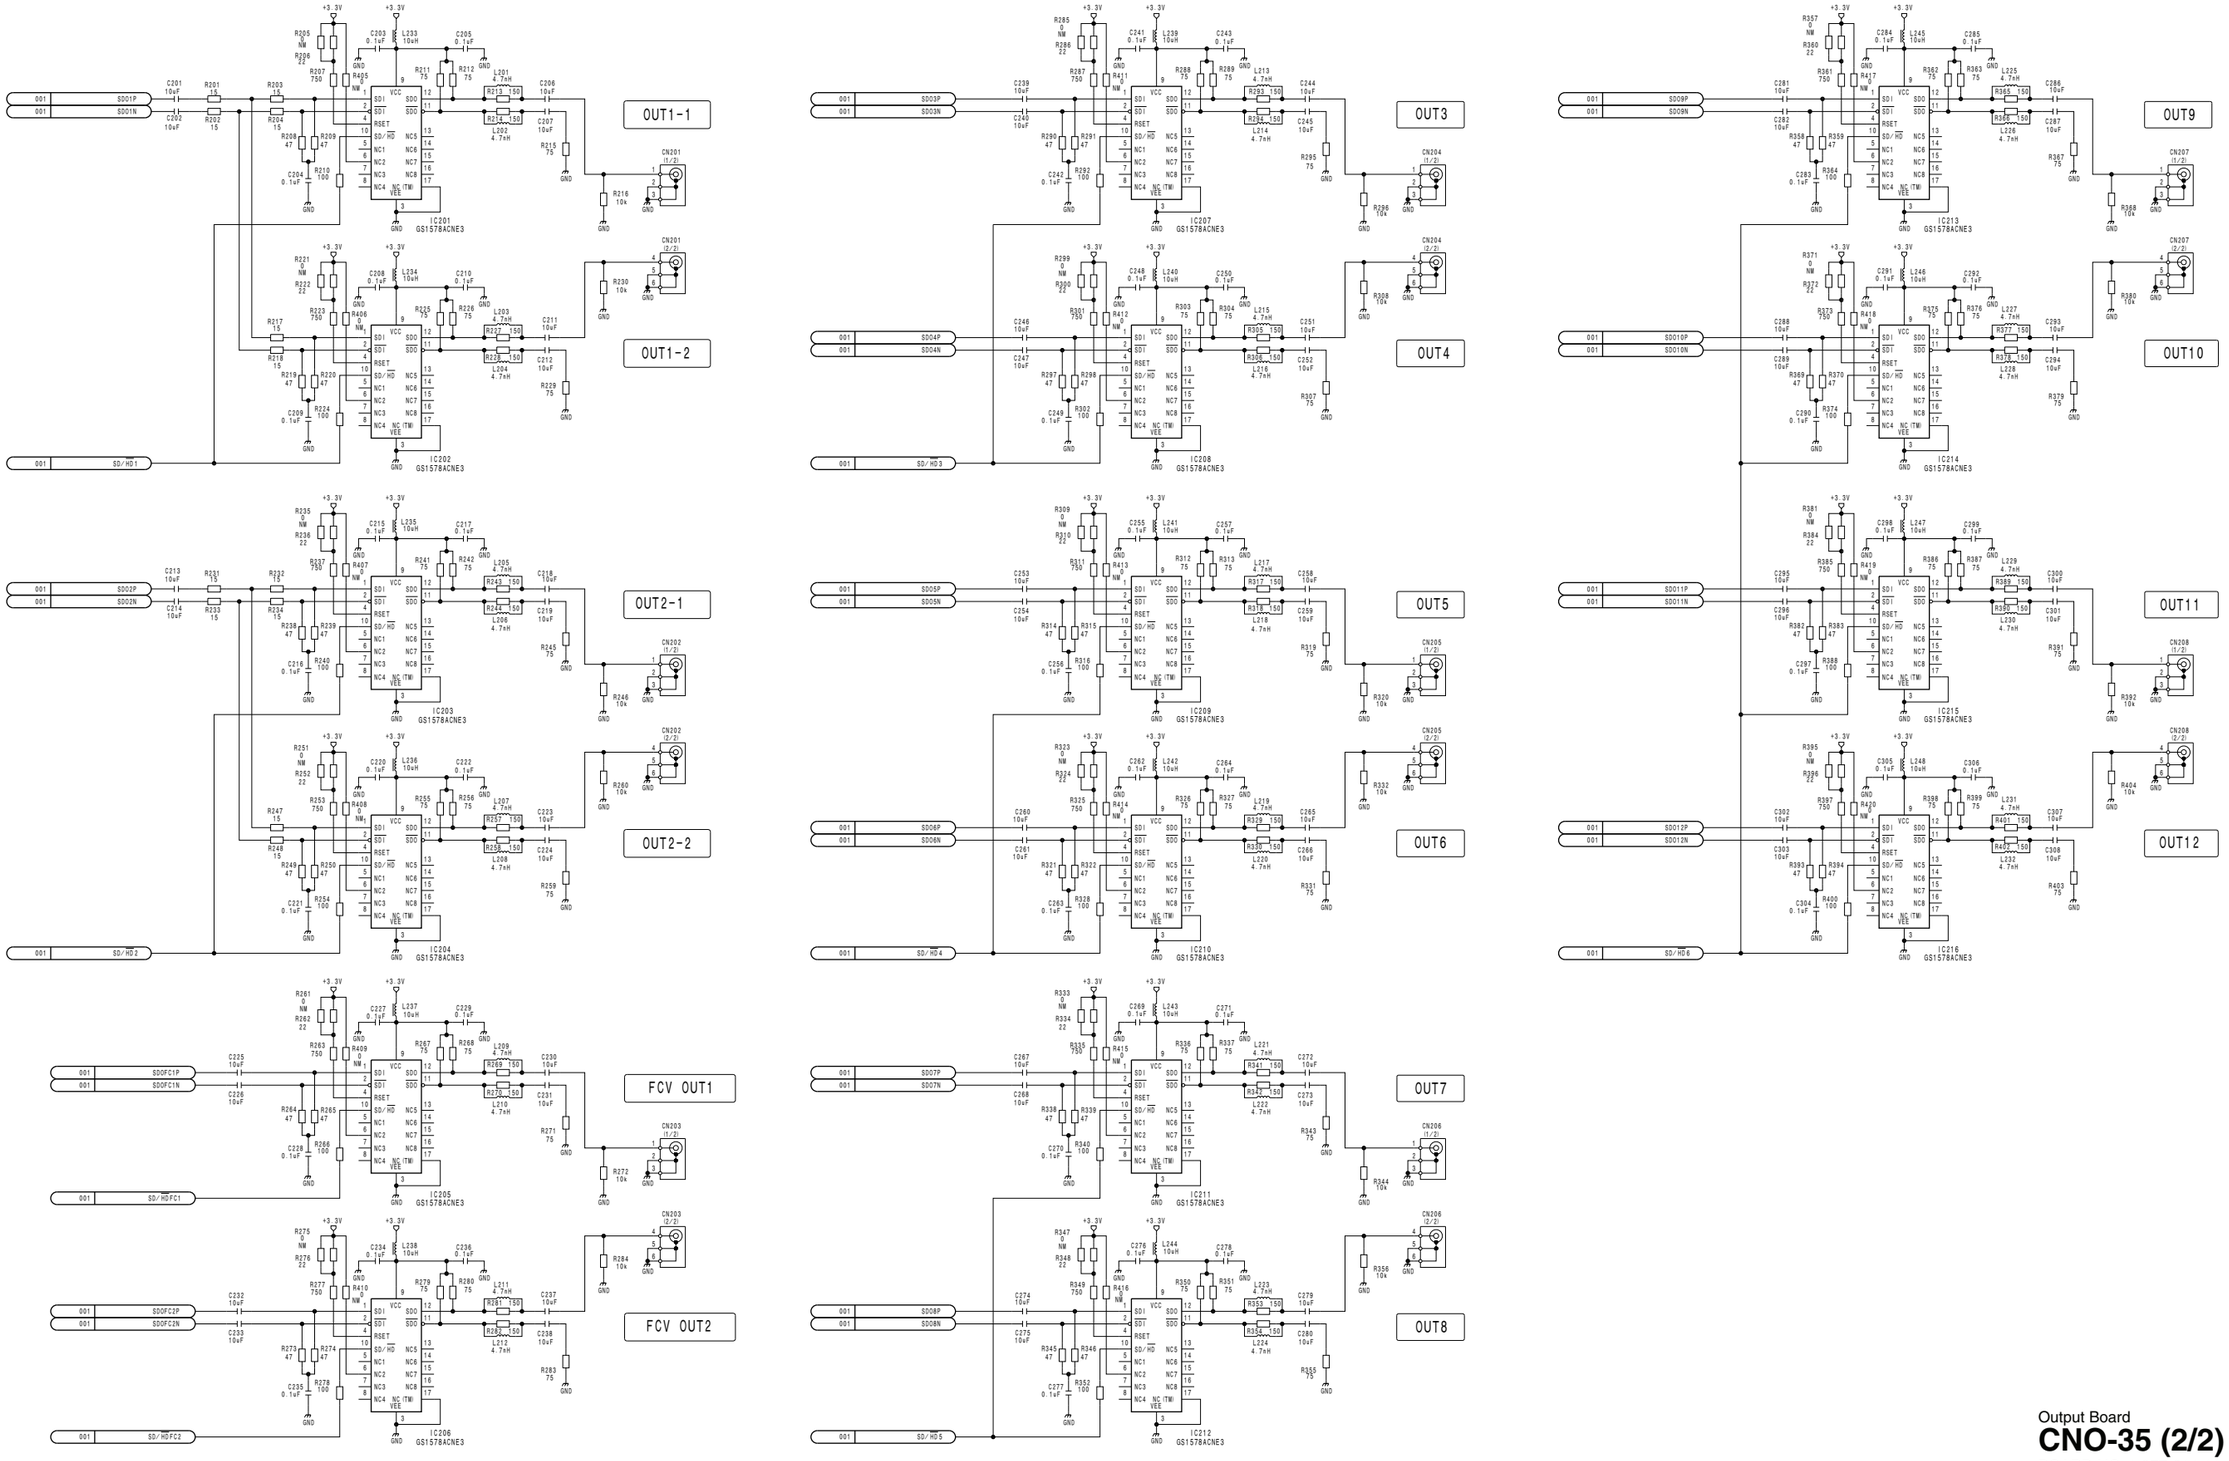

Output Board
CNO-35 (2/2)
BOARD NO. 1-877-214-11
MVS-6000_CNO-35_001_2


CNO-36 (1/2)
SUFFIX: -11

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	IRESETI	IDC_ENBLI		IFORMATI	FUSE+12V	GND
6			GND IEXT_REARI			GND
7						GND
8			GND			GND
9			GND			GND
10			GND		SD/ $\overline{HD}$	GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNX1

	a	b	c	d	e	FG
1	SDO11P	SDO11N	GND	SDO12P	SDO12N	GND
2			GND			GND
3	SDO9P	SDO9N	GND	SDO10P	SDO10N	GND
4			GND			GND
5	SDO7P	SDO7N	GND	SDO8P	SDO8N	GND
6			GND			GND
7	SDO5P	SDO5N	GND	SDO6P	SDO6N	GND
8			GND			GND
9	SDO3P	SDO3N	GND	SDO4P	SDO4N	GND
10			GND			GND
11	SDO1P	SDO1N	GND	SDO2P	SDO2N	GND

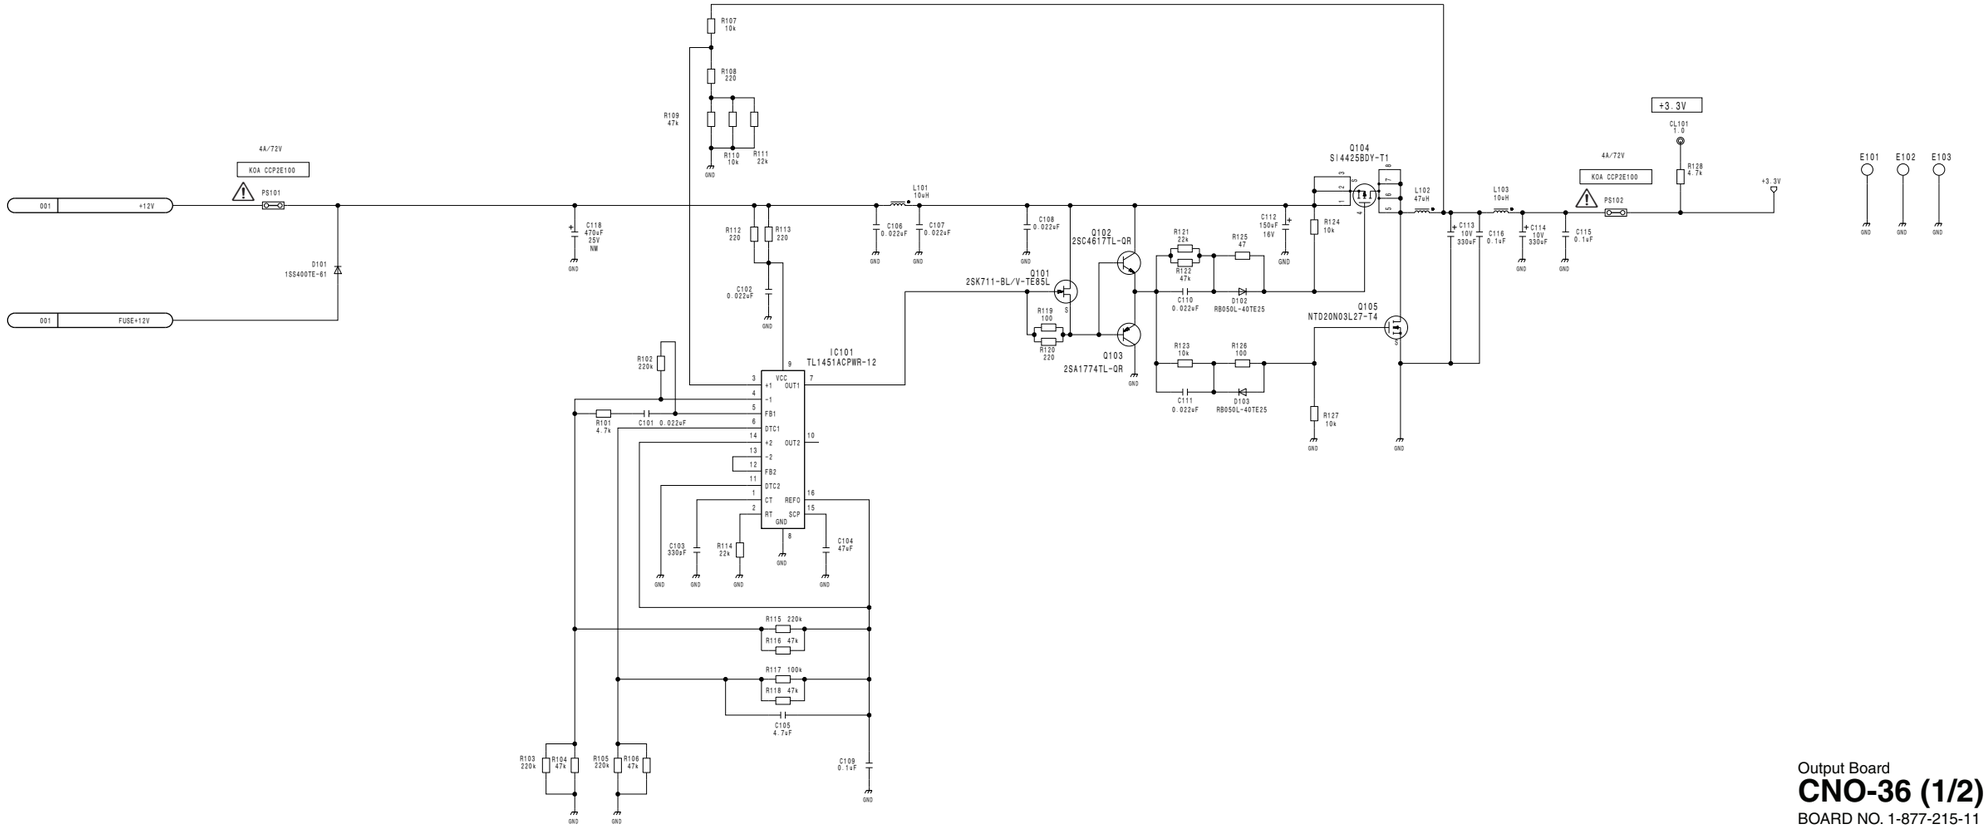


Output Board
CNO-36 (1/2)
BOARD NO. 1-877-215-11
MVS-6000_CNO-36_001_1

4-72


CNO-36 (2/2)
SUFFIX: -11

CNO-36 (2/2)
SUFFIX: -11

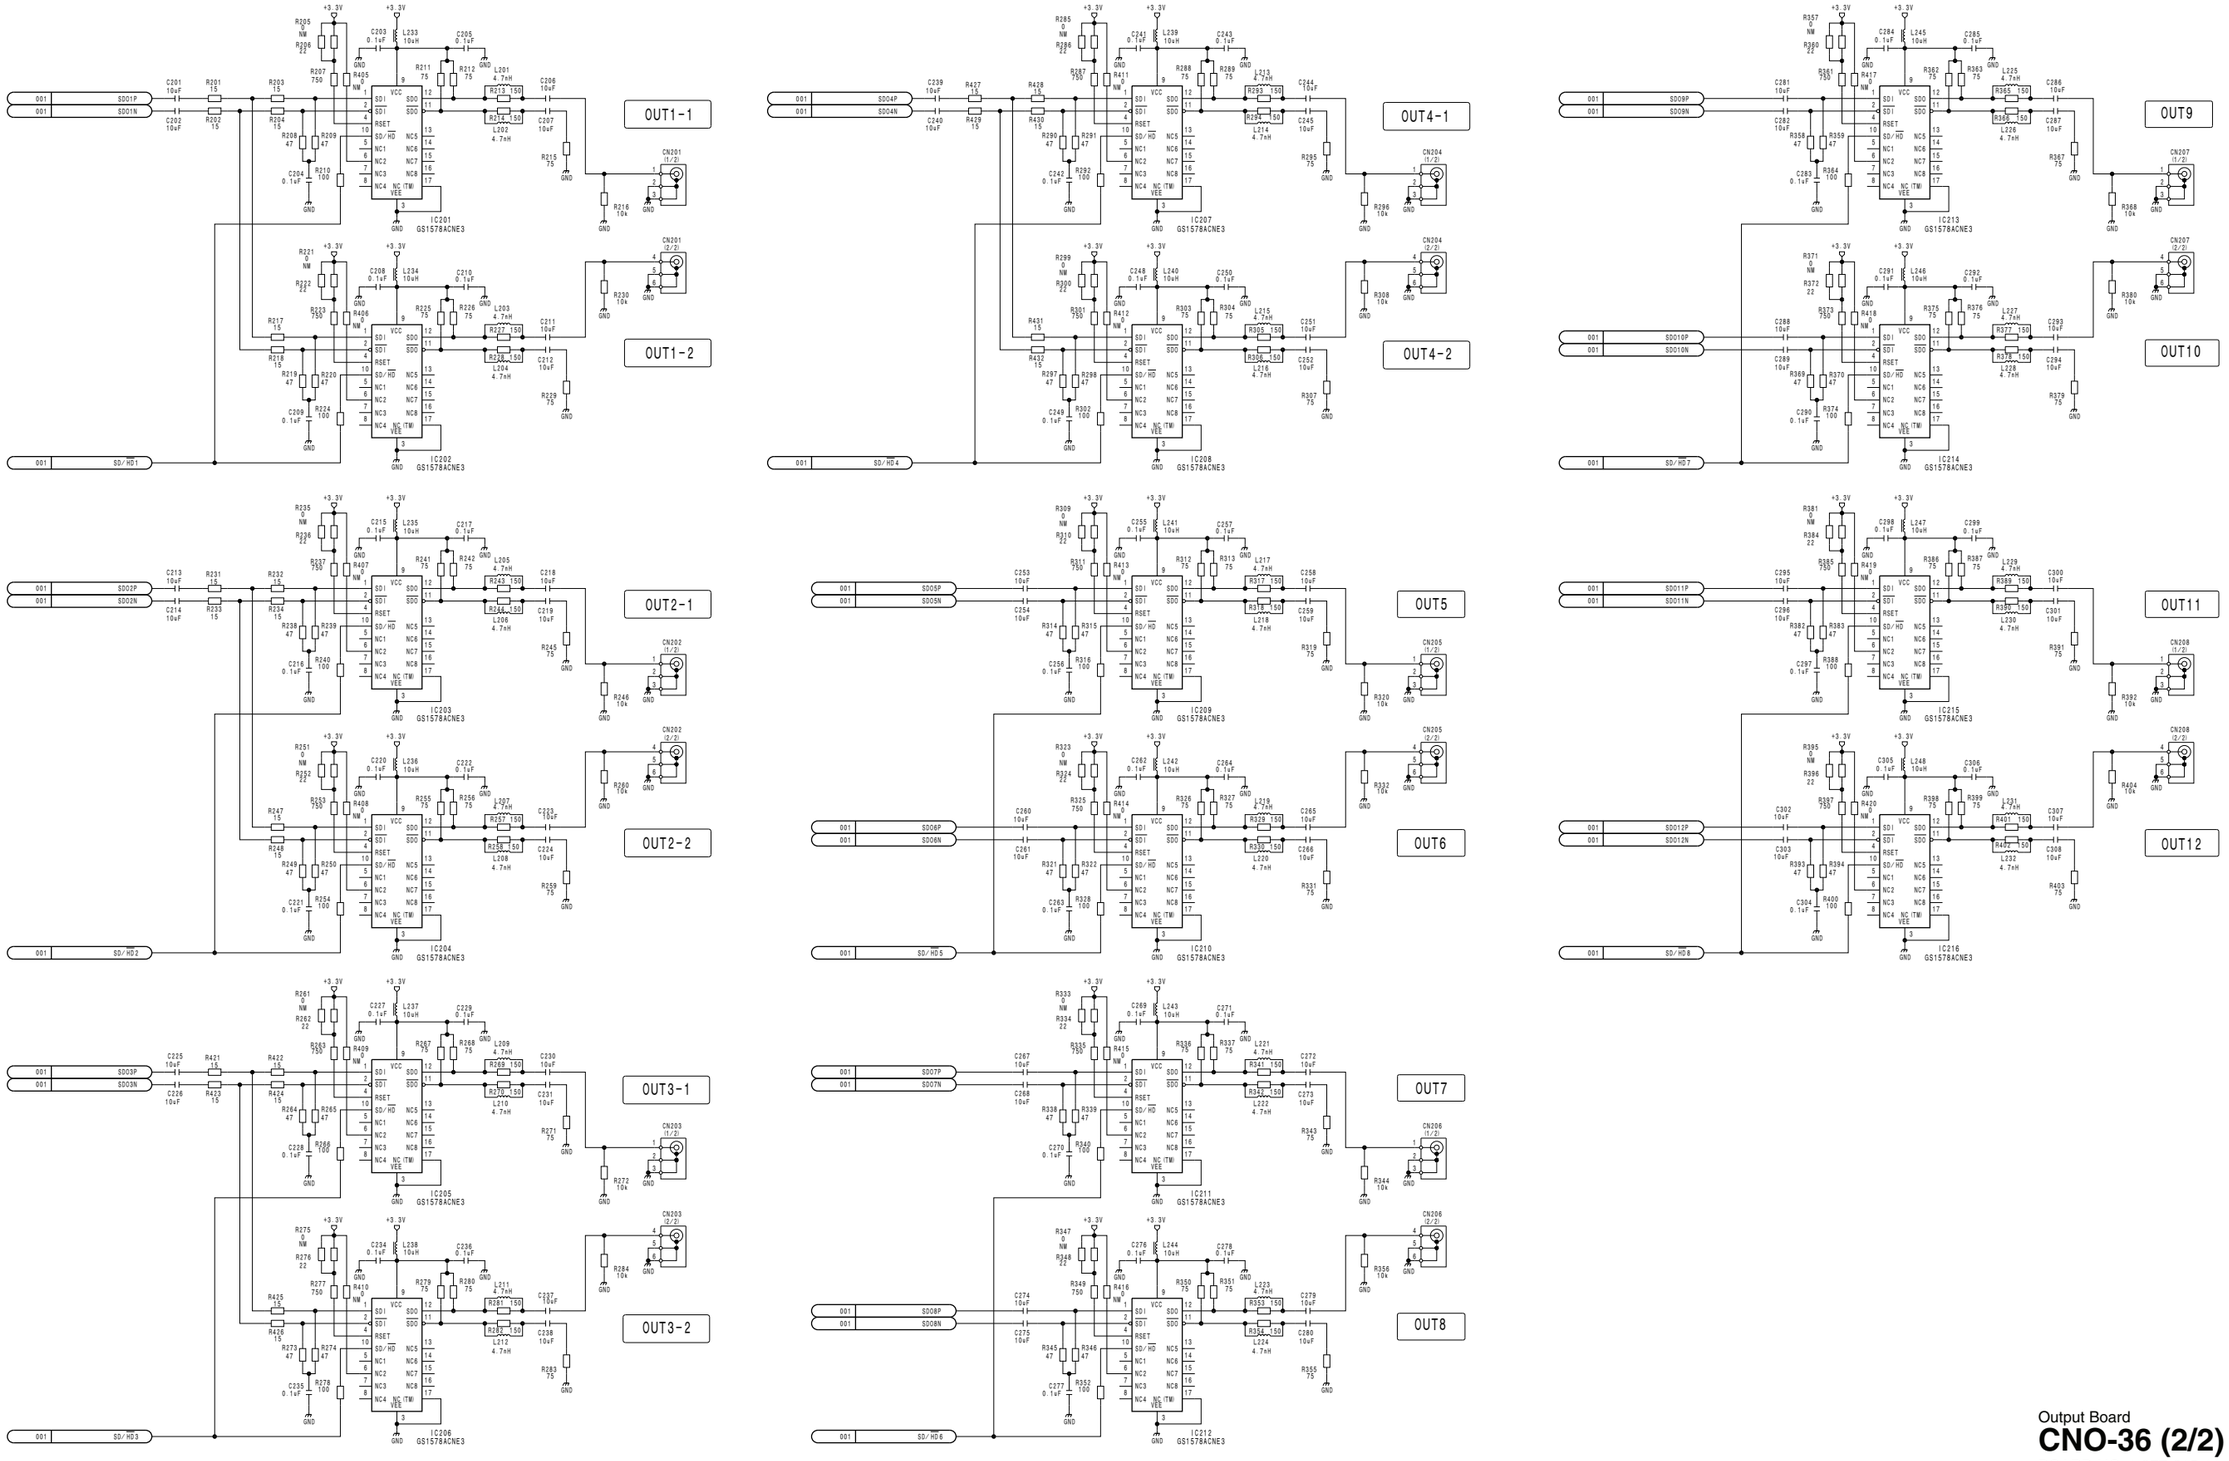


Output Board
CNO-36 (2/2)
BOARD NO. 1-877-215-11
MVS-6000_CNO-36_001_2


DIF-184 (1/3)
SUFFIX: -12

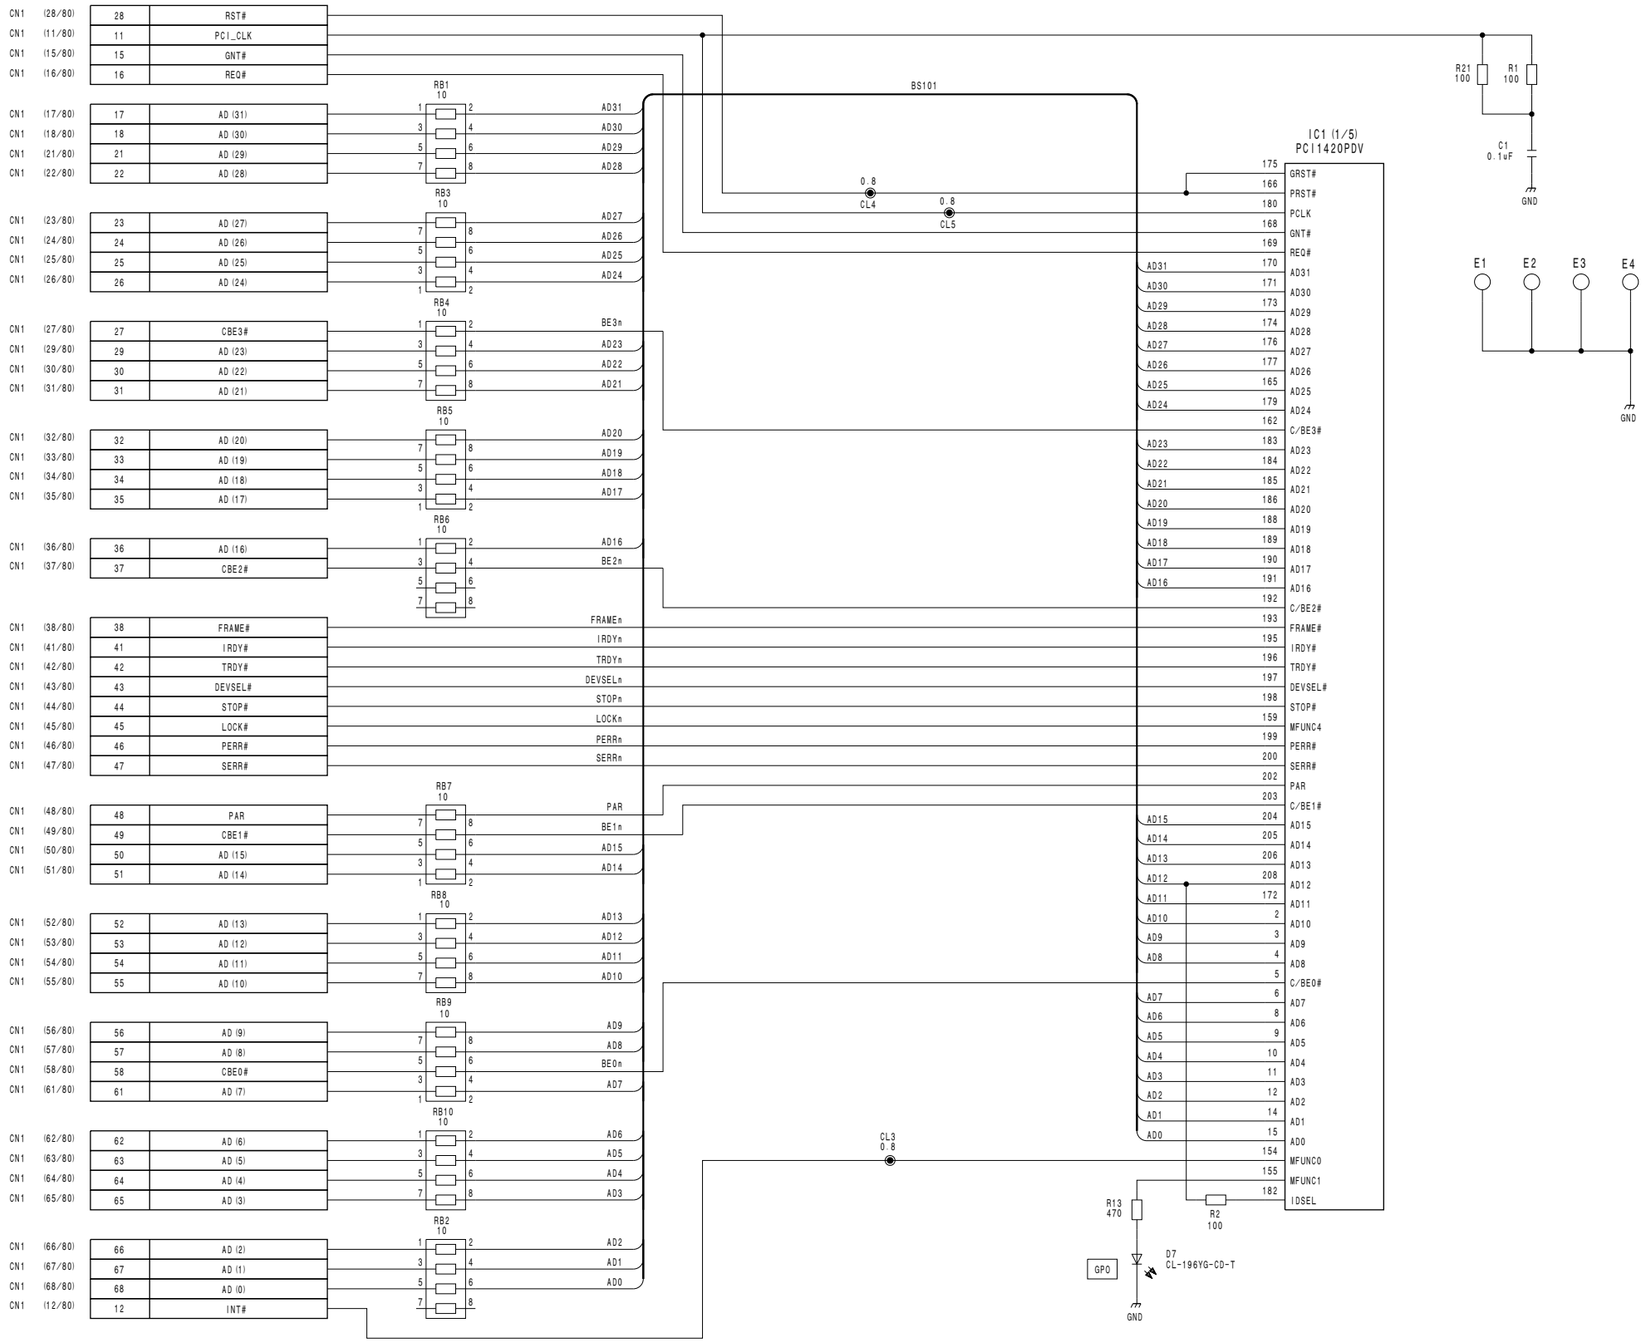

Compact Flash Interface Board
DIF-184 (1/3)
BOARD NO. 1-872-762-12
SJXA-340_DIF-184_002_1


DIF-184 (2/3)
SUFFIX: -12

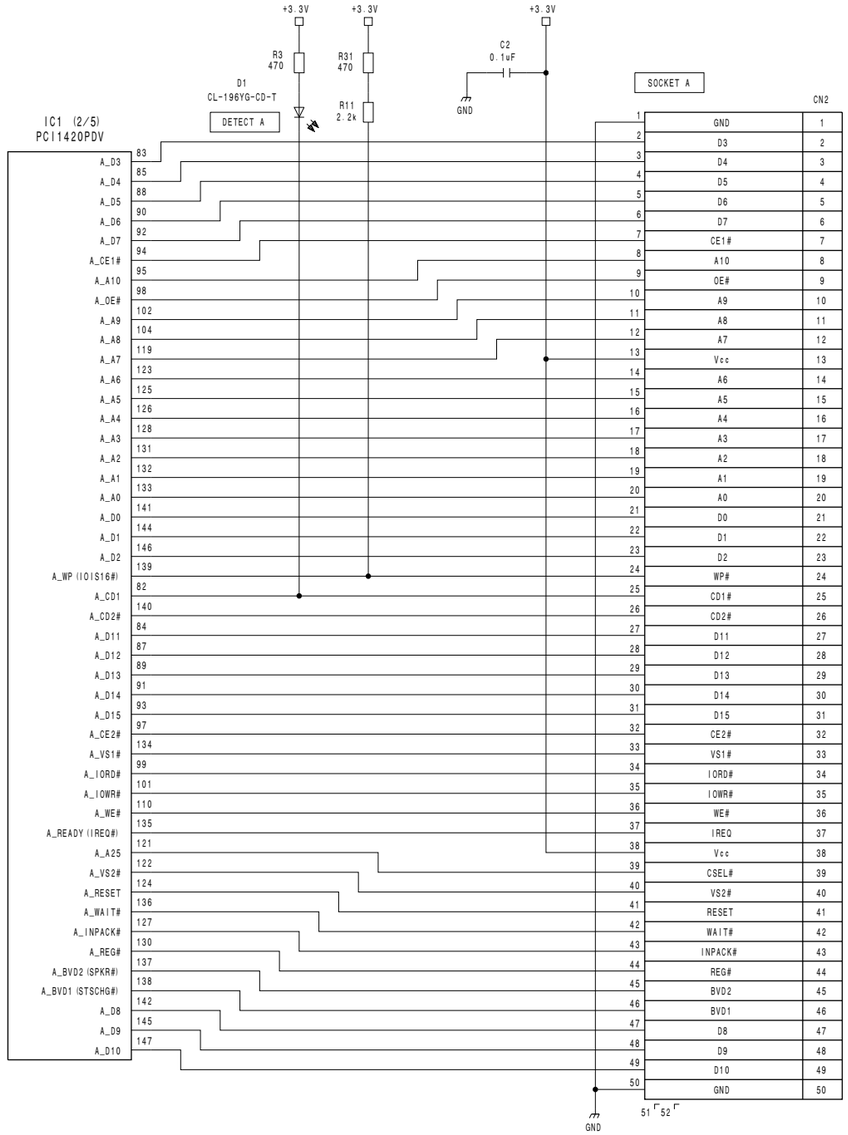


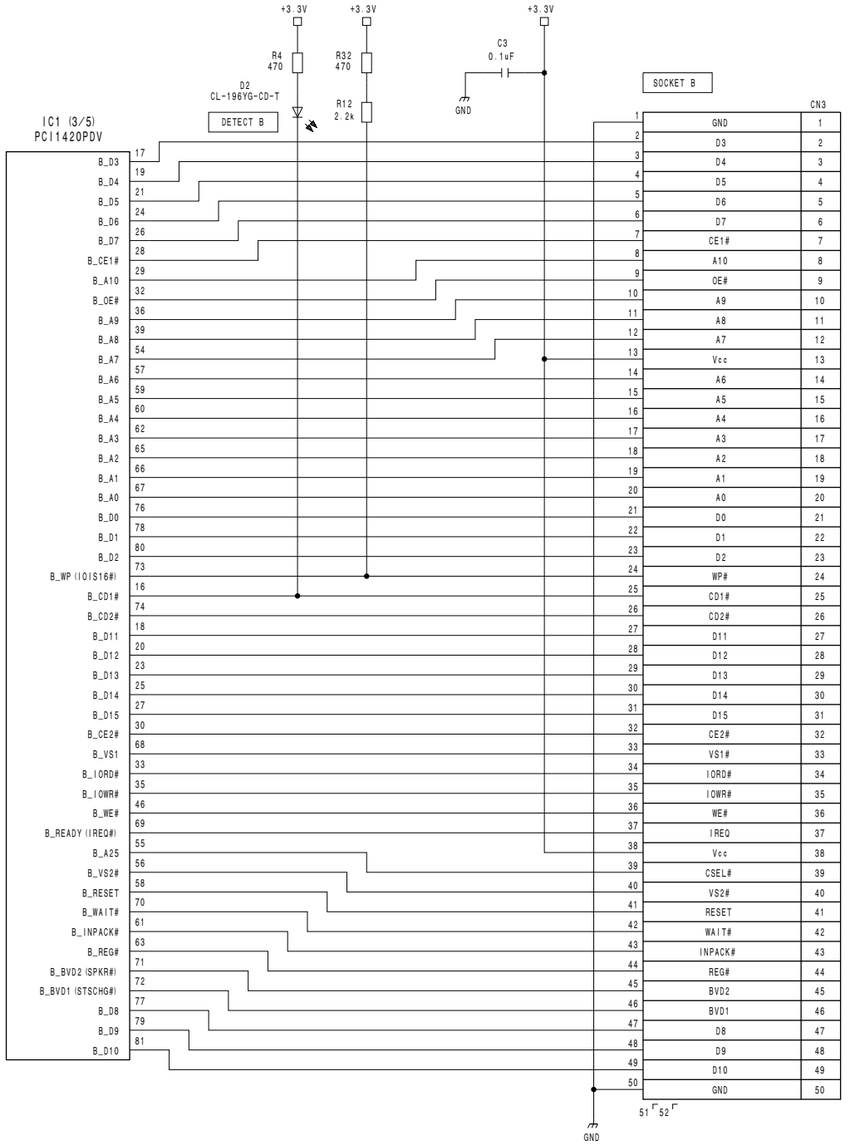


Compact Flash Interface Board
DIF-184 (2/3)
BOARD NO. 1-872-762-12
SJXA-340_DIF-184_002_2

DIF-184 (3/3)
SUFFIX: -12

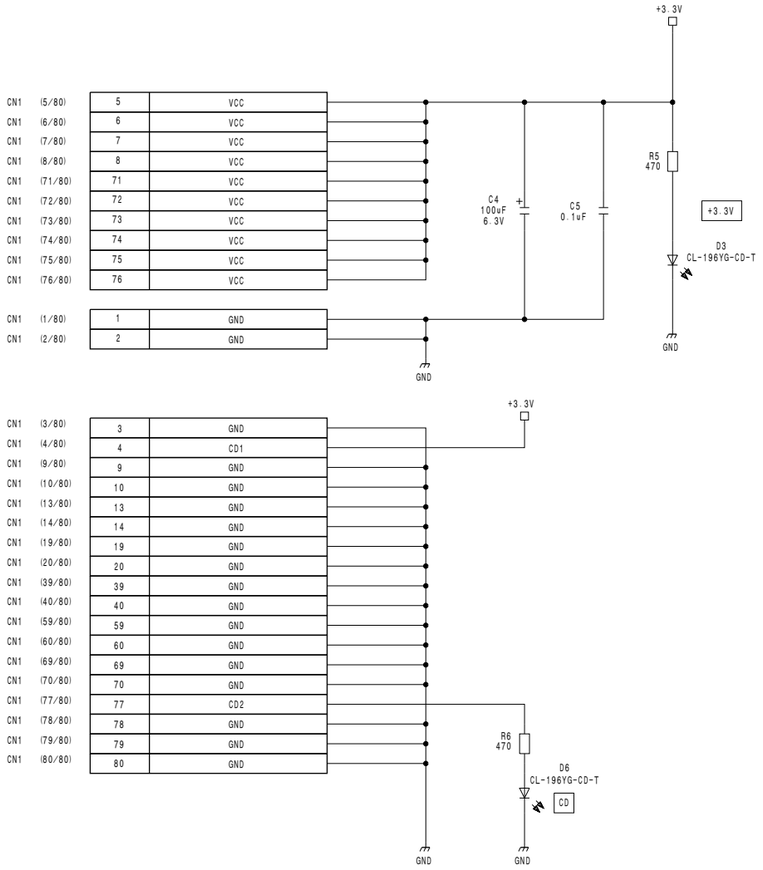

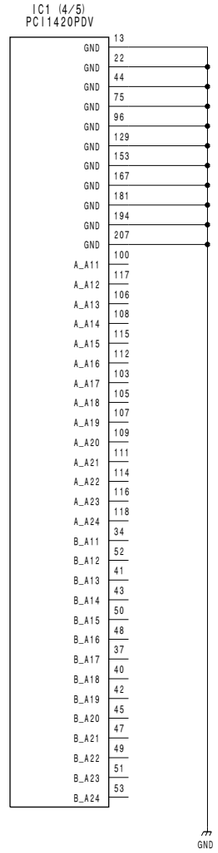

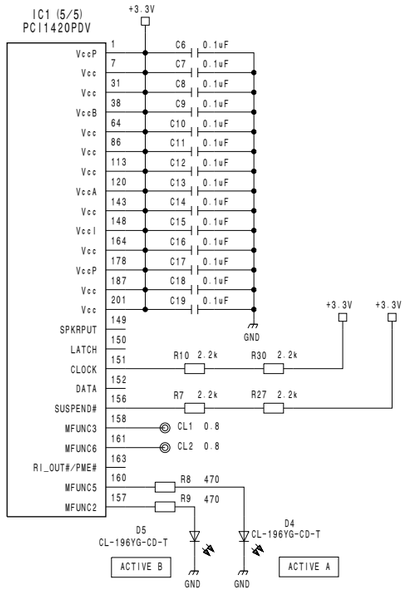

Compact Flash Interface Board
DIF-184 (3/3)
BOARD NO. 1-872-762-12
SJXA-340_DIF-184_002_3

DVP-49 (1/31)
SUFFIX: -12

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_L	DC_ENBL	GND (BD_EXT_SLF)	FORMAT	FUSE+12V	GND
6						GND
7	SLOT3	SLOT2	(Reserve_BD_EXT)	SLOT1	SLOT0	GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15	V1IN1P	V1IN1N	GND	V1IN2P	V1IN2N	GND
16	V1IN3P	V1IN3N	GND	V1INCKP	V1INCKN	GND
17			GND			GND
18			GND			GND
19	K1N1P	K1N1N	GND	K1N2P	K1N2N	GND
20	K1N3P	K1N3N	GND	K1NCKP	K1NCKN	GND
21			GND			GND
22			GND			GND
23	V2IN1P	V2IN1N	GND	V2IN2P	V2IN2N	GND
24	V2IN3P	V2IN3N	GND	V2INCKP	V2INCKN	GND
25			GND			GND

CNV1

	a	b	c	d	e	FG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5	DMEMON1_0P	DMEMON1_0N	GND	DMEMON1_1P	DMEMON1_1N	GND
6	DMEMON1_2P	DMEMON1_2N	GND	DMEMON1_CKP	DMEMON1_CKN	GND
7	(DMEMON1_3P)	(DMEMON1_3N)	GND	(DMEMON1_4P)	(DMEMON1_4N)	GND
8			GND			GND
9			GND			GND
10			GND			GND
11	DMEMON2_0P	DMEMON2_0N	GND	DMEMON2_1P	DMEMON2_1N	GND
12	DMEMON2_2P	DMEMON2_2N	GND	DMEMON2_CKP	DMEMON2_CKN	GND
13	(DMEMON2_3P)	(DMEMON2_3N)	GND	(DMEMON2_4P)	(DMEMON2_4N)	GND
14			GND			GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND


CNW1

	a	b	c	d	e	FG
1	(EXT1IN1P)	(EXT1IN1N)	GND	(EXT1IN2P)	(EXT1IN2N)	GND
2	(EXT1IN3P)	(EXT1IN3N)	GND	(EXT1INCKP)	(EXT1INCKN)	GND
3	(EXT3IN1P)	(EXT3IN1N)	GND	(EXT2IN2P)	(EXT2IN2N)	GND
4	(EXT3IN3P)	(EXT3IN3N)	GND	(EXT2INCKP)	(EXT2INCKN)	GND
5	PID1	PID0	GND	PID3	PID2	GND
6	BUS_A0	BUS_A1	GND	BUS_A2	BUS_A3	GND
7	BUS_A4	BUS_A5	GND	BUS_A6	BUS_A7	GND
8	BUS_A8	BUS_A9	GND	BUS_A10	BUS_A11	GND
9	BUS_A12	BUS_A13	GND	BUS_A14	BUS_A15	GND
10	BUS_OE	BUS_WE	GND	BUS_CS1	BUS_CS2	GND
11	BUS_CS3	BUS_CS4	GND	BUS_CS5	BUS_CSX	GND
12						GND
13						GND
14						GND
15	BUS_D0	BUS_D1	GND	BUS_D2	BUS_D3	GND
16	BUS_D4	BUS_D5	GND	BUS_D6	BUS_D7	GND
17	BUS_D8	BUS_D9	GND	BUS_D10	BUS_D11	GND
18	BUS_D12	BUS_D13	GND	BUS_D14	BUS_D15	GND
19	BUS_INT	BUS_BUSY	GND	BUS_UB	BUS_LB	GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND


CNZ1

	a	b	c	d	e	FG
1	V1OUT1P	V1OUT1N	GND	V1OUT2P	V1OUT2N	GND
2	V1OUT3P	V1OUT3N	GND	V1OUTCKP	V1OUTCKN	GND
3			GND			GND
4			GND			GND
5	KOUT1P	KOUT1N	GND	KOUT2P	KOUT2N	GND
6	KOUT3P	KOUT3N	GND	KOUTCKP	KOUTCKN	GND
7			GND			GND
8			GND			GND
9	V2OUT1P	V2OUT1N	GND	V2OUT2P	V2OUT2N	GND
10	V2OUT3P	V2OUT3N	GND	V2OUTCKP	V2OUTCKN	GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16	(PZKOUT1P)	(PZKOUT1N)	GND	(PZKOUT2P)	(PZKOUT2N)	GND
17	(PZKOUT3P)	(PZKOUT3N)	GND	(PZKOUTCKP)	(PZKOUTCKN)	GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND	HFCKP	HFCKN	GND
24	HDP	HDN	GND	CKXP	CKXN	GND
25	FLOEP	FLOEN	GND	VDP	VDN	GND

DME Board
DVP-49 (1/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_1

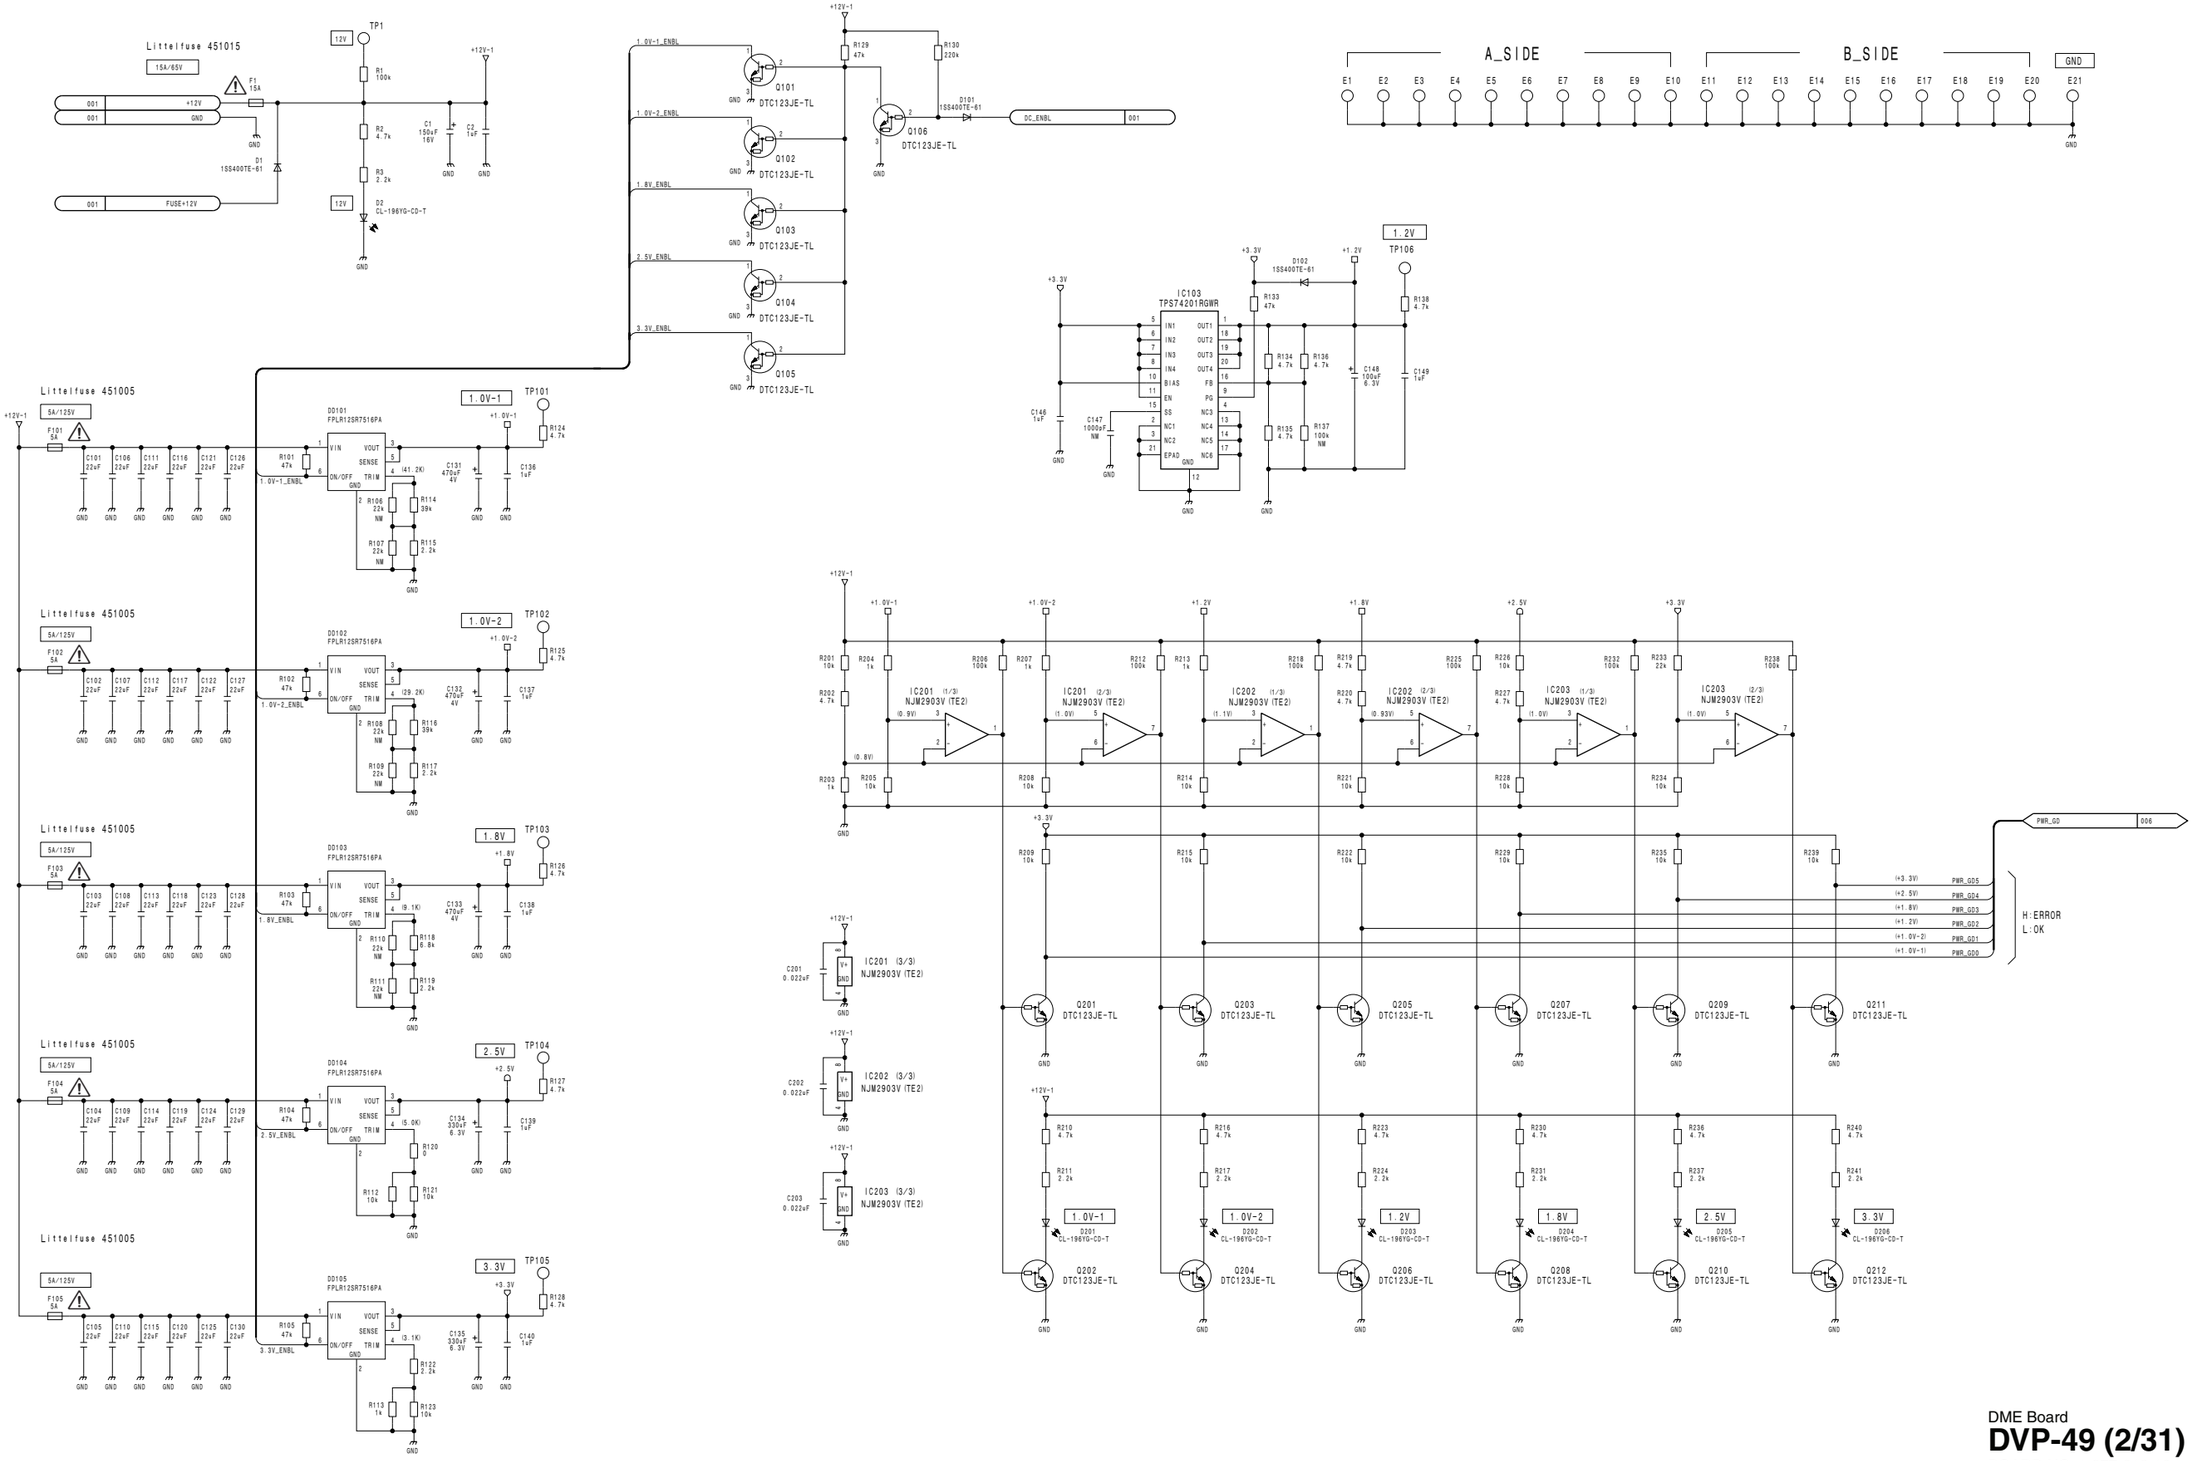


DME Board
DVP-49 (2/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_2

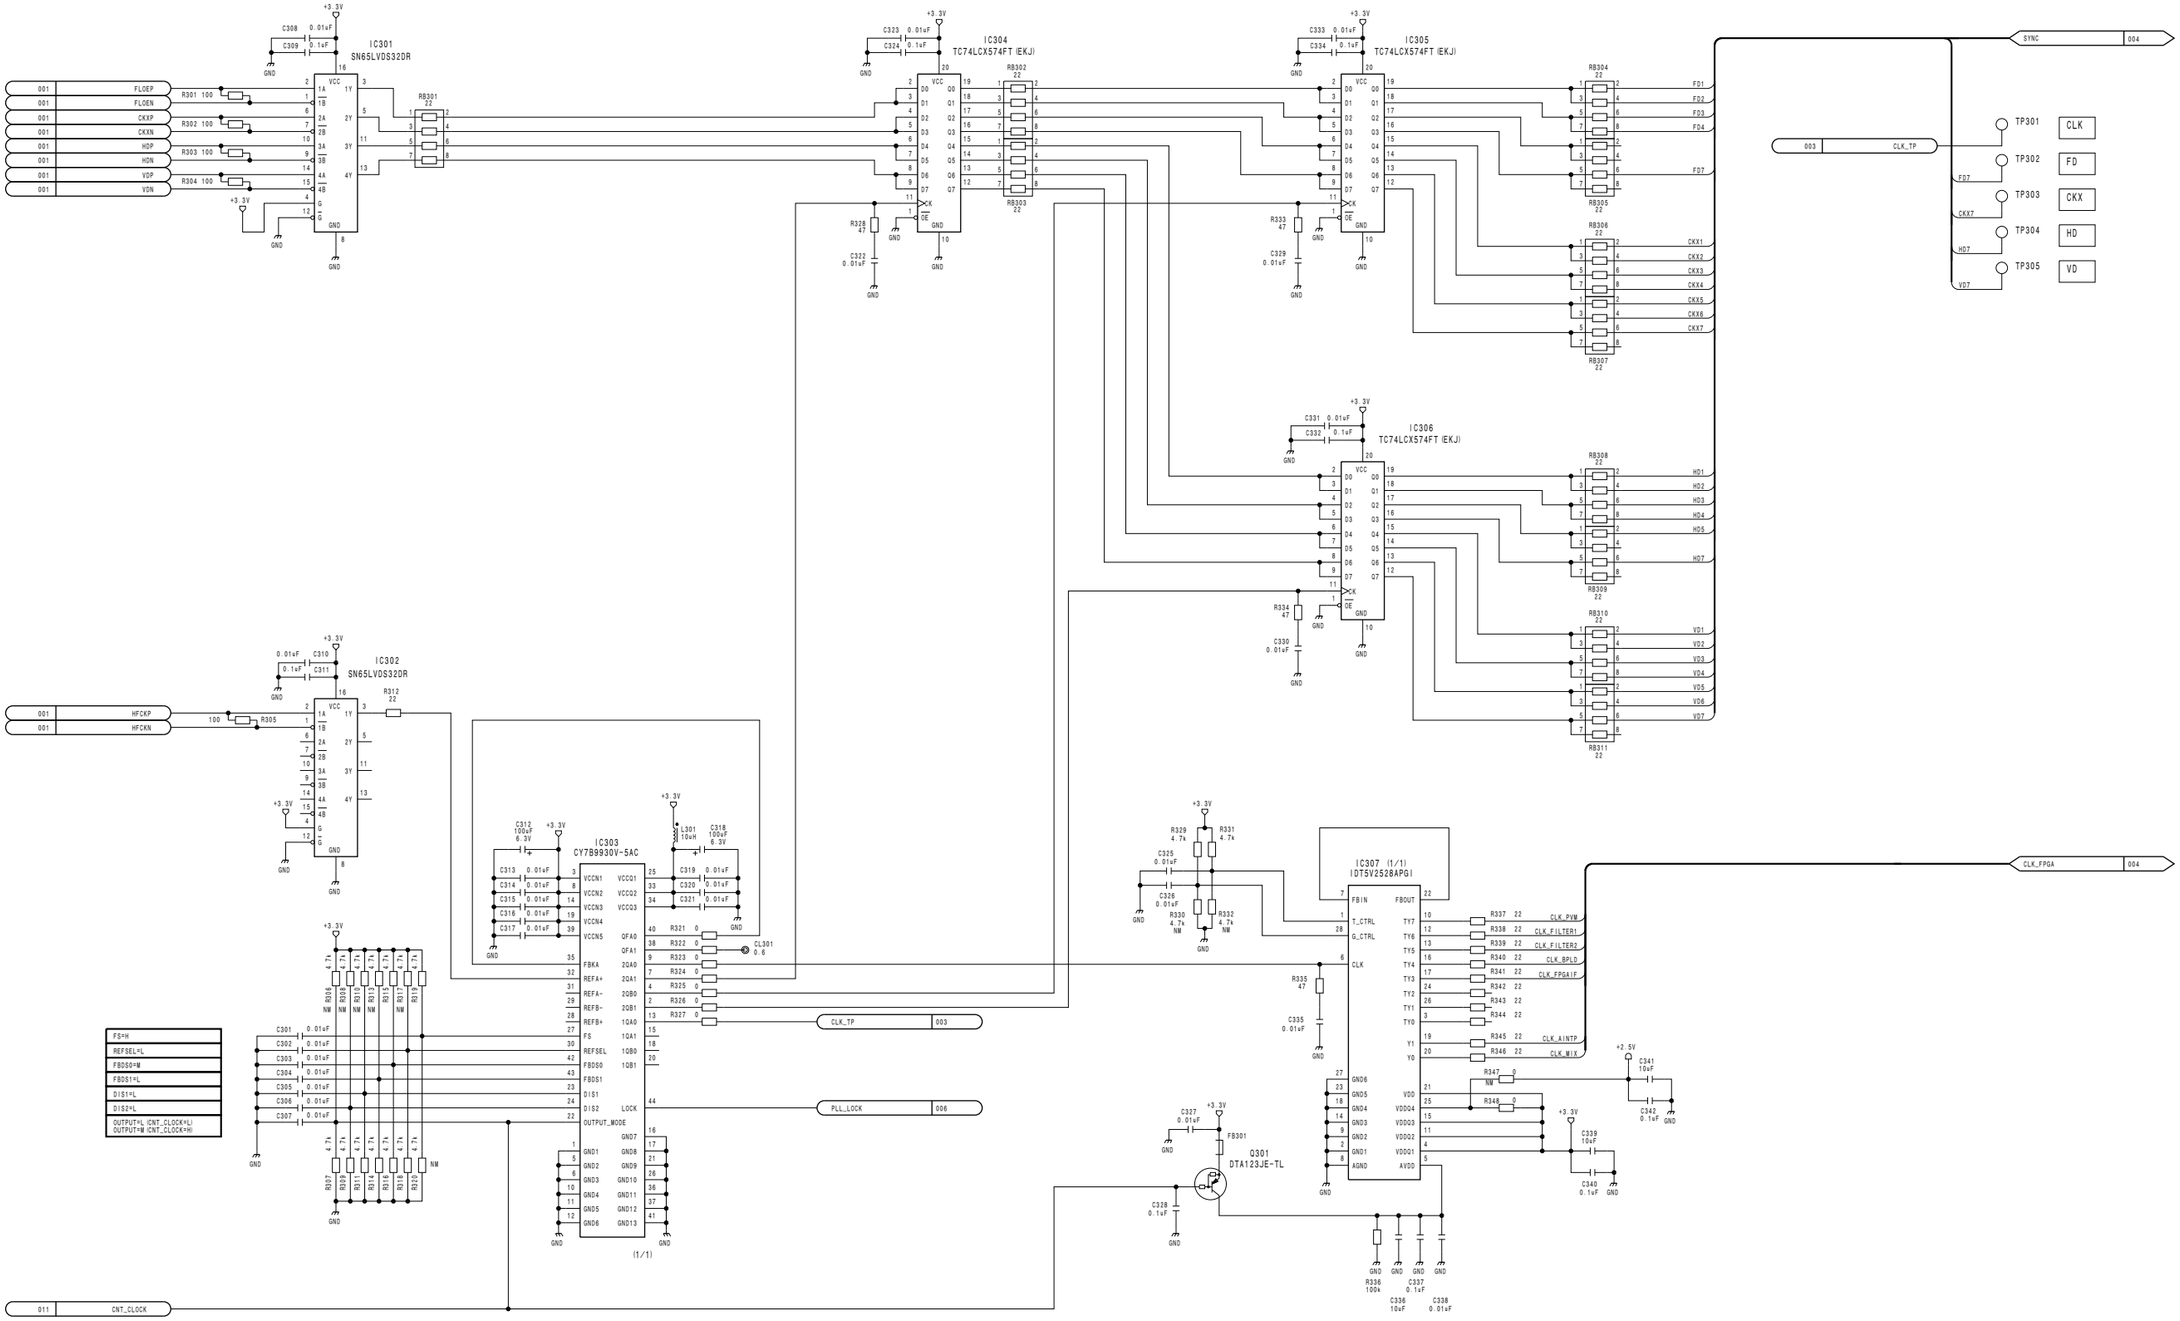


DME Board
DVP-49 (3/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_3

DVP-49 (4/31)
SUFFIX: -12

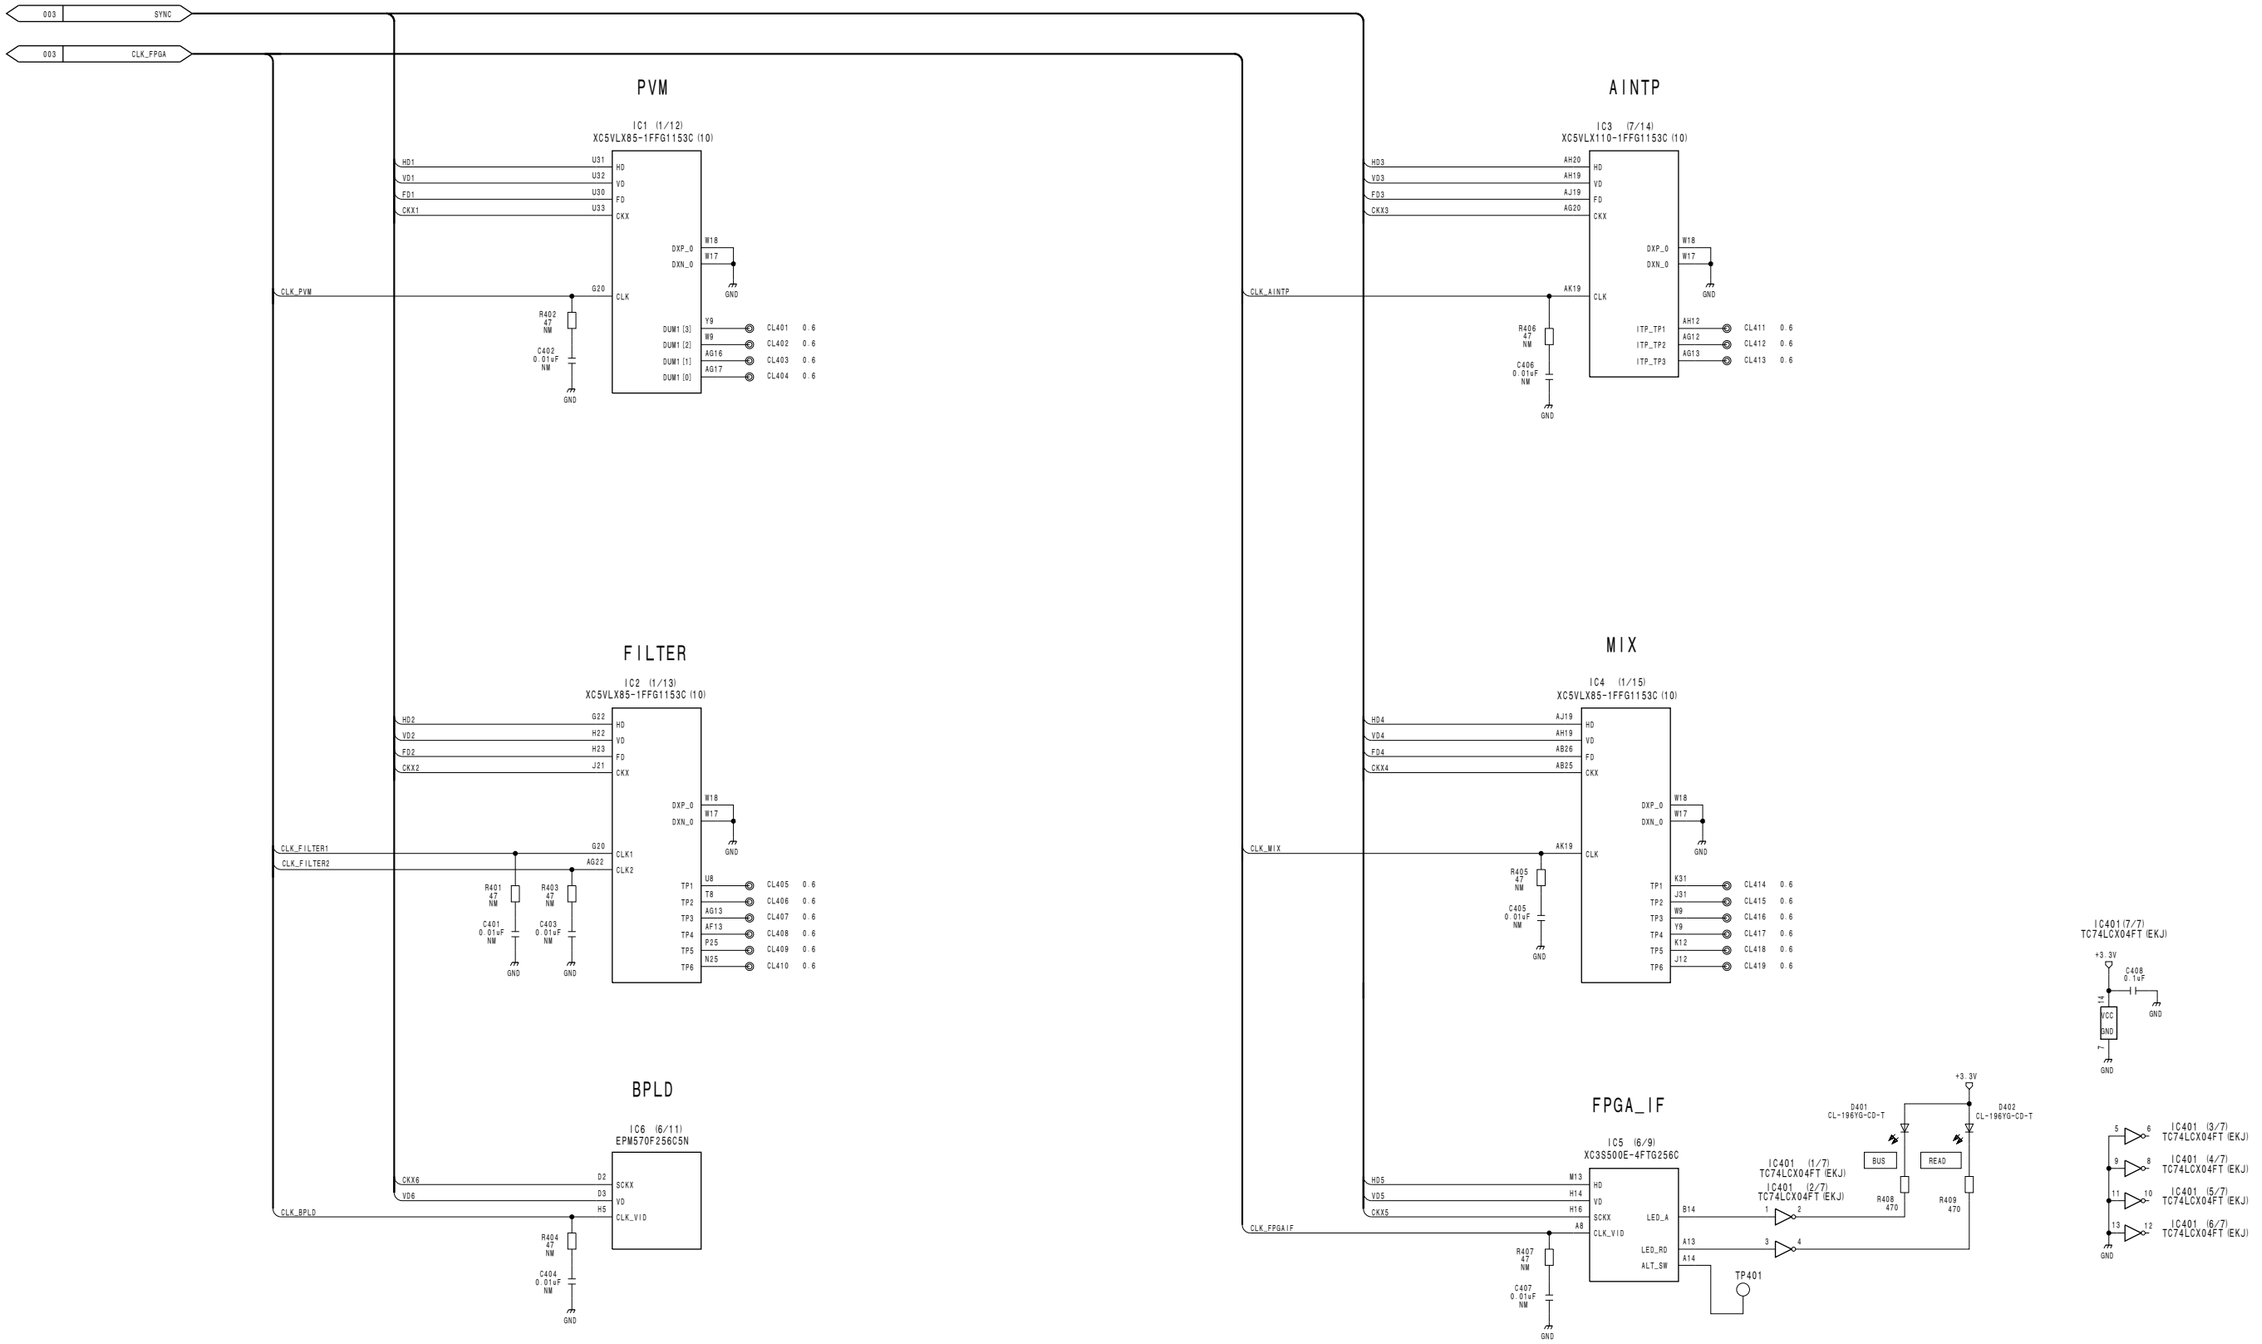


DME Board
DVP-49 (4/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_4

DVP-49 (5/31)
SUFFIX: -12

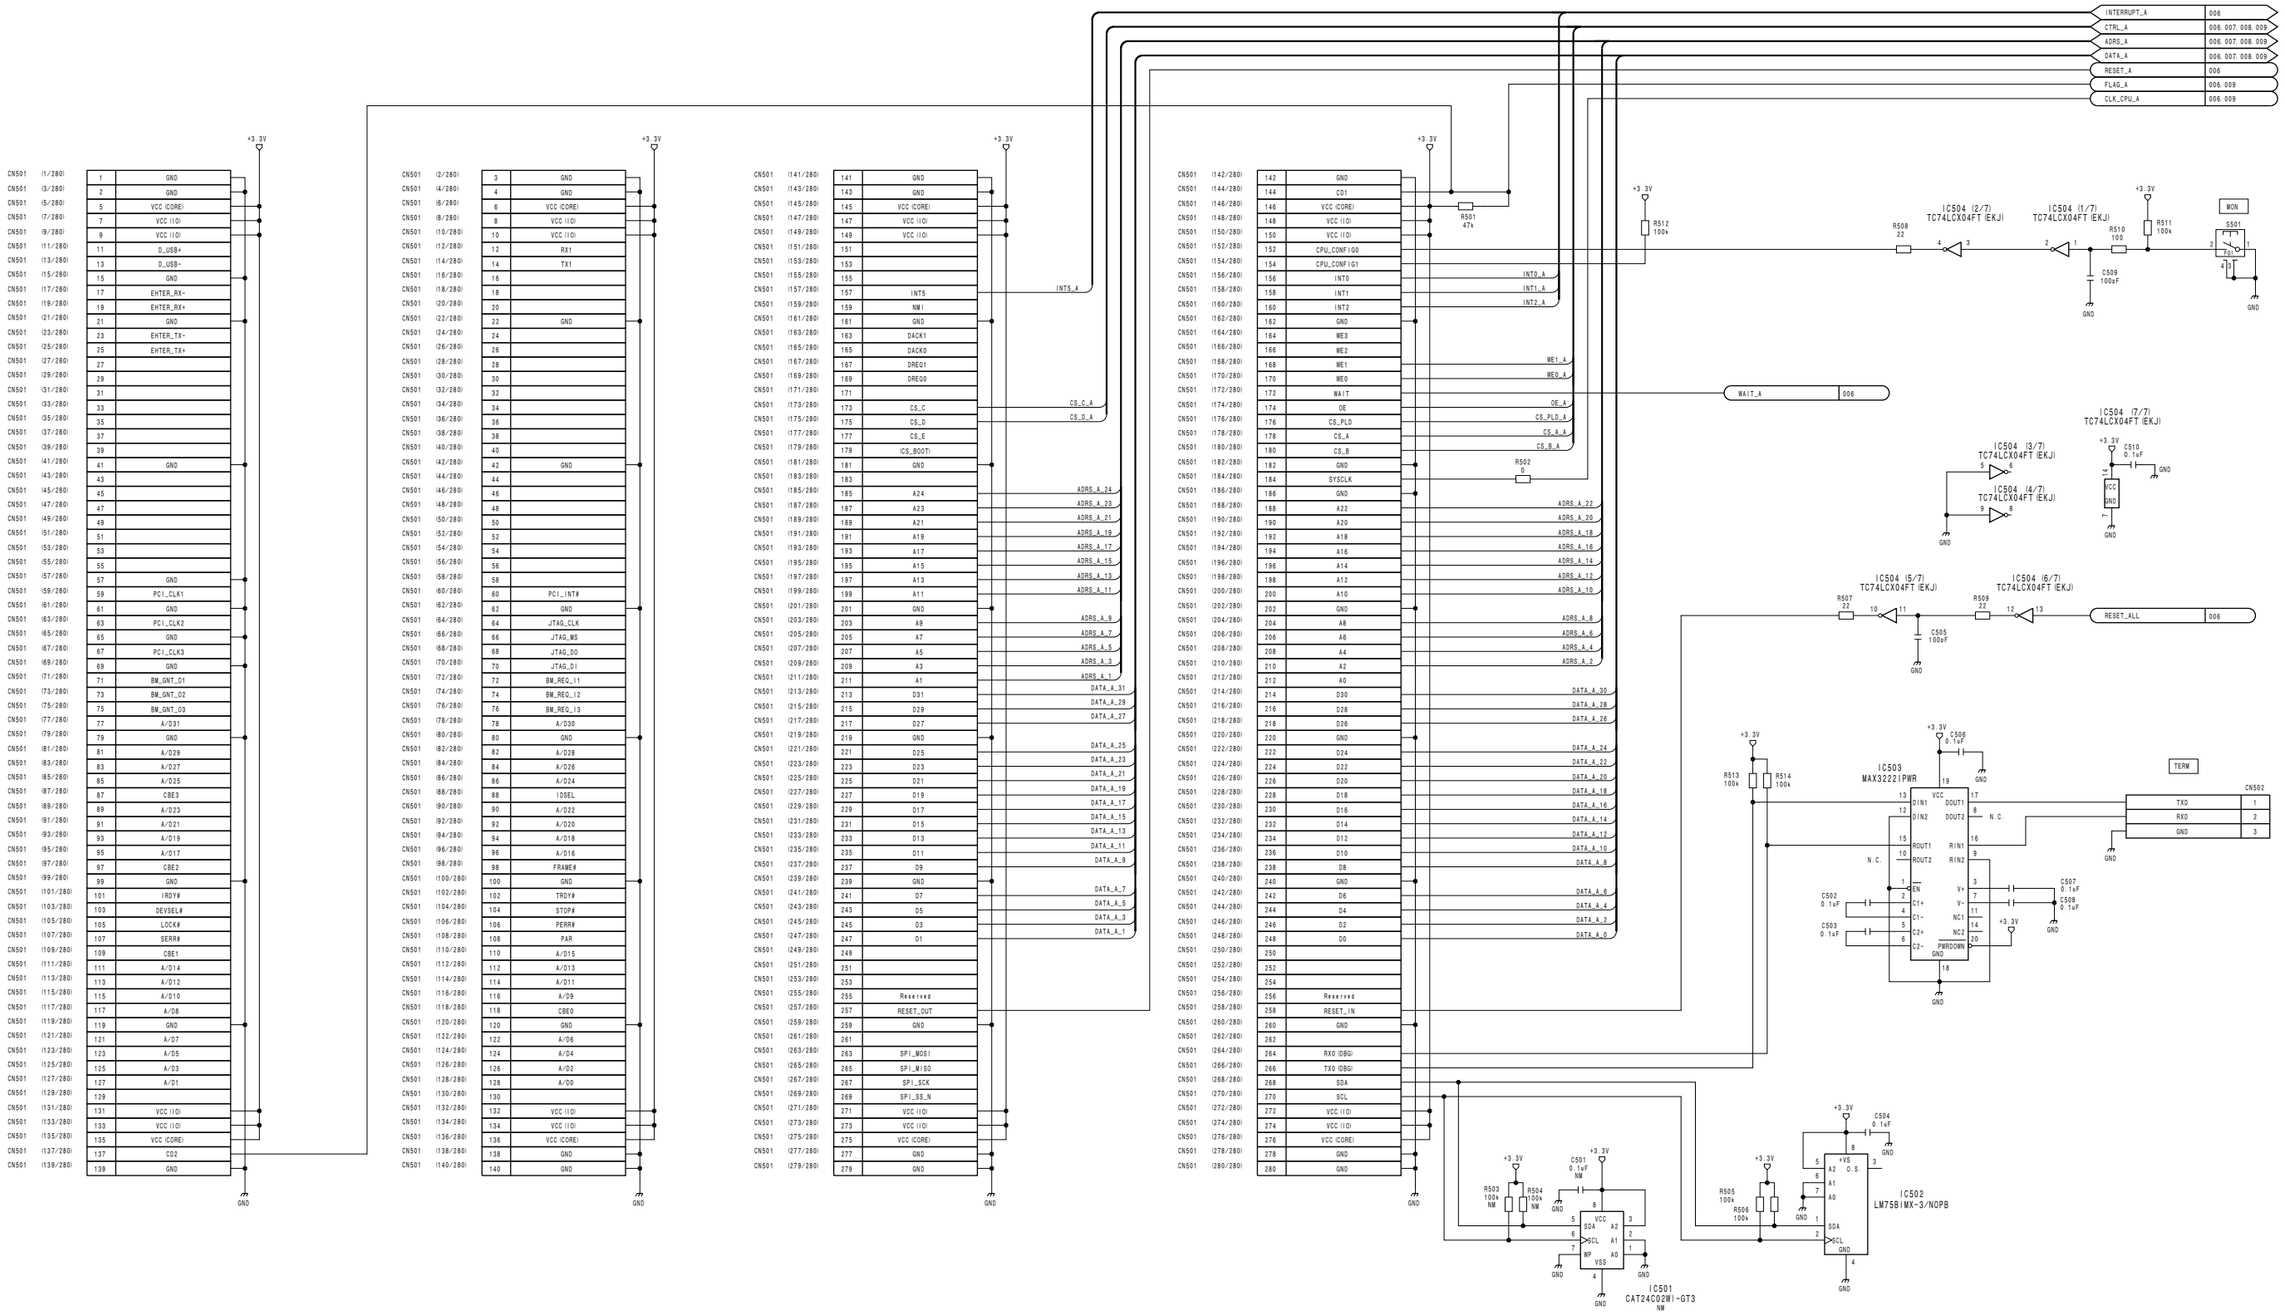

DME Board
DVP-49 (5/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_5

DVP-49 (6/31) **SUFFIX: -12**

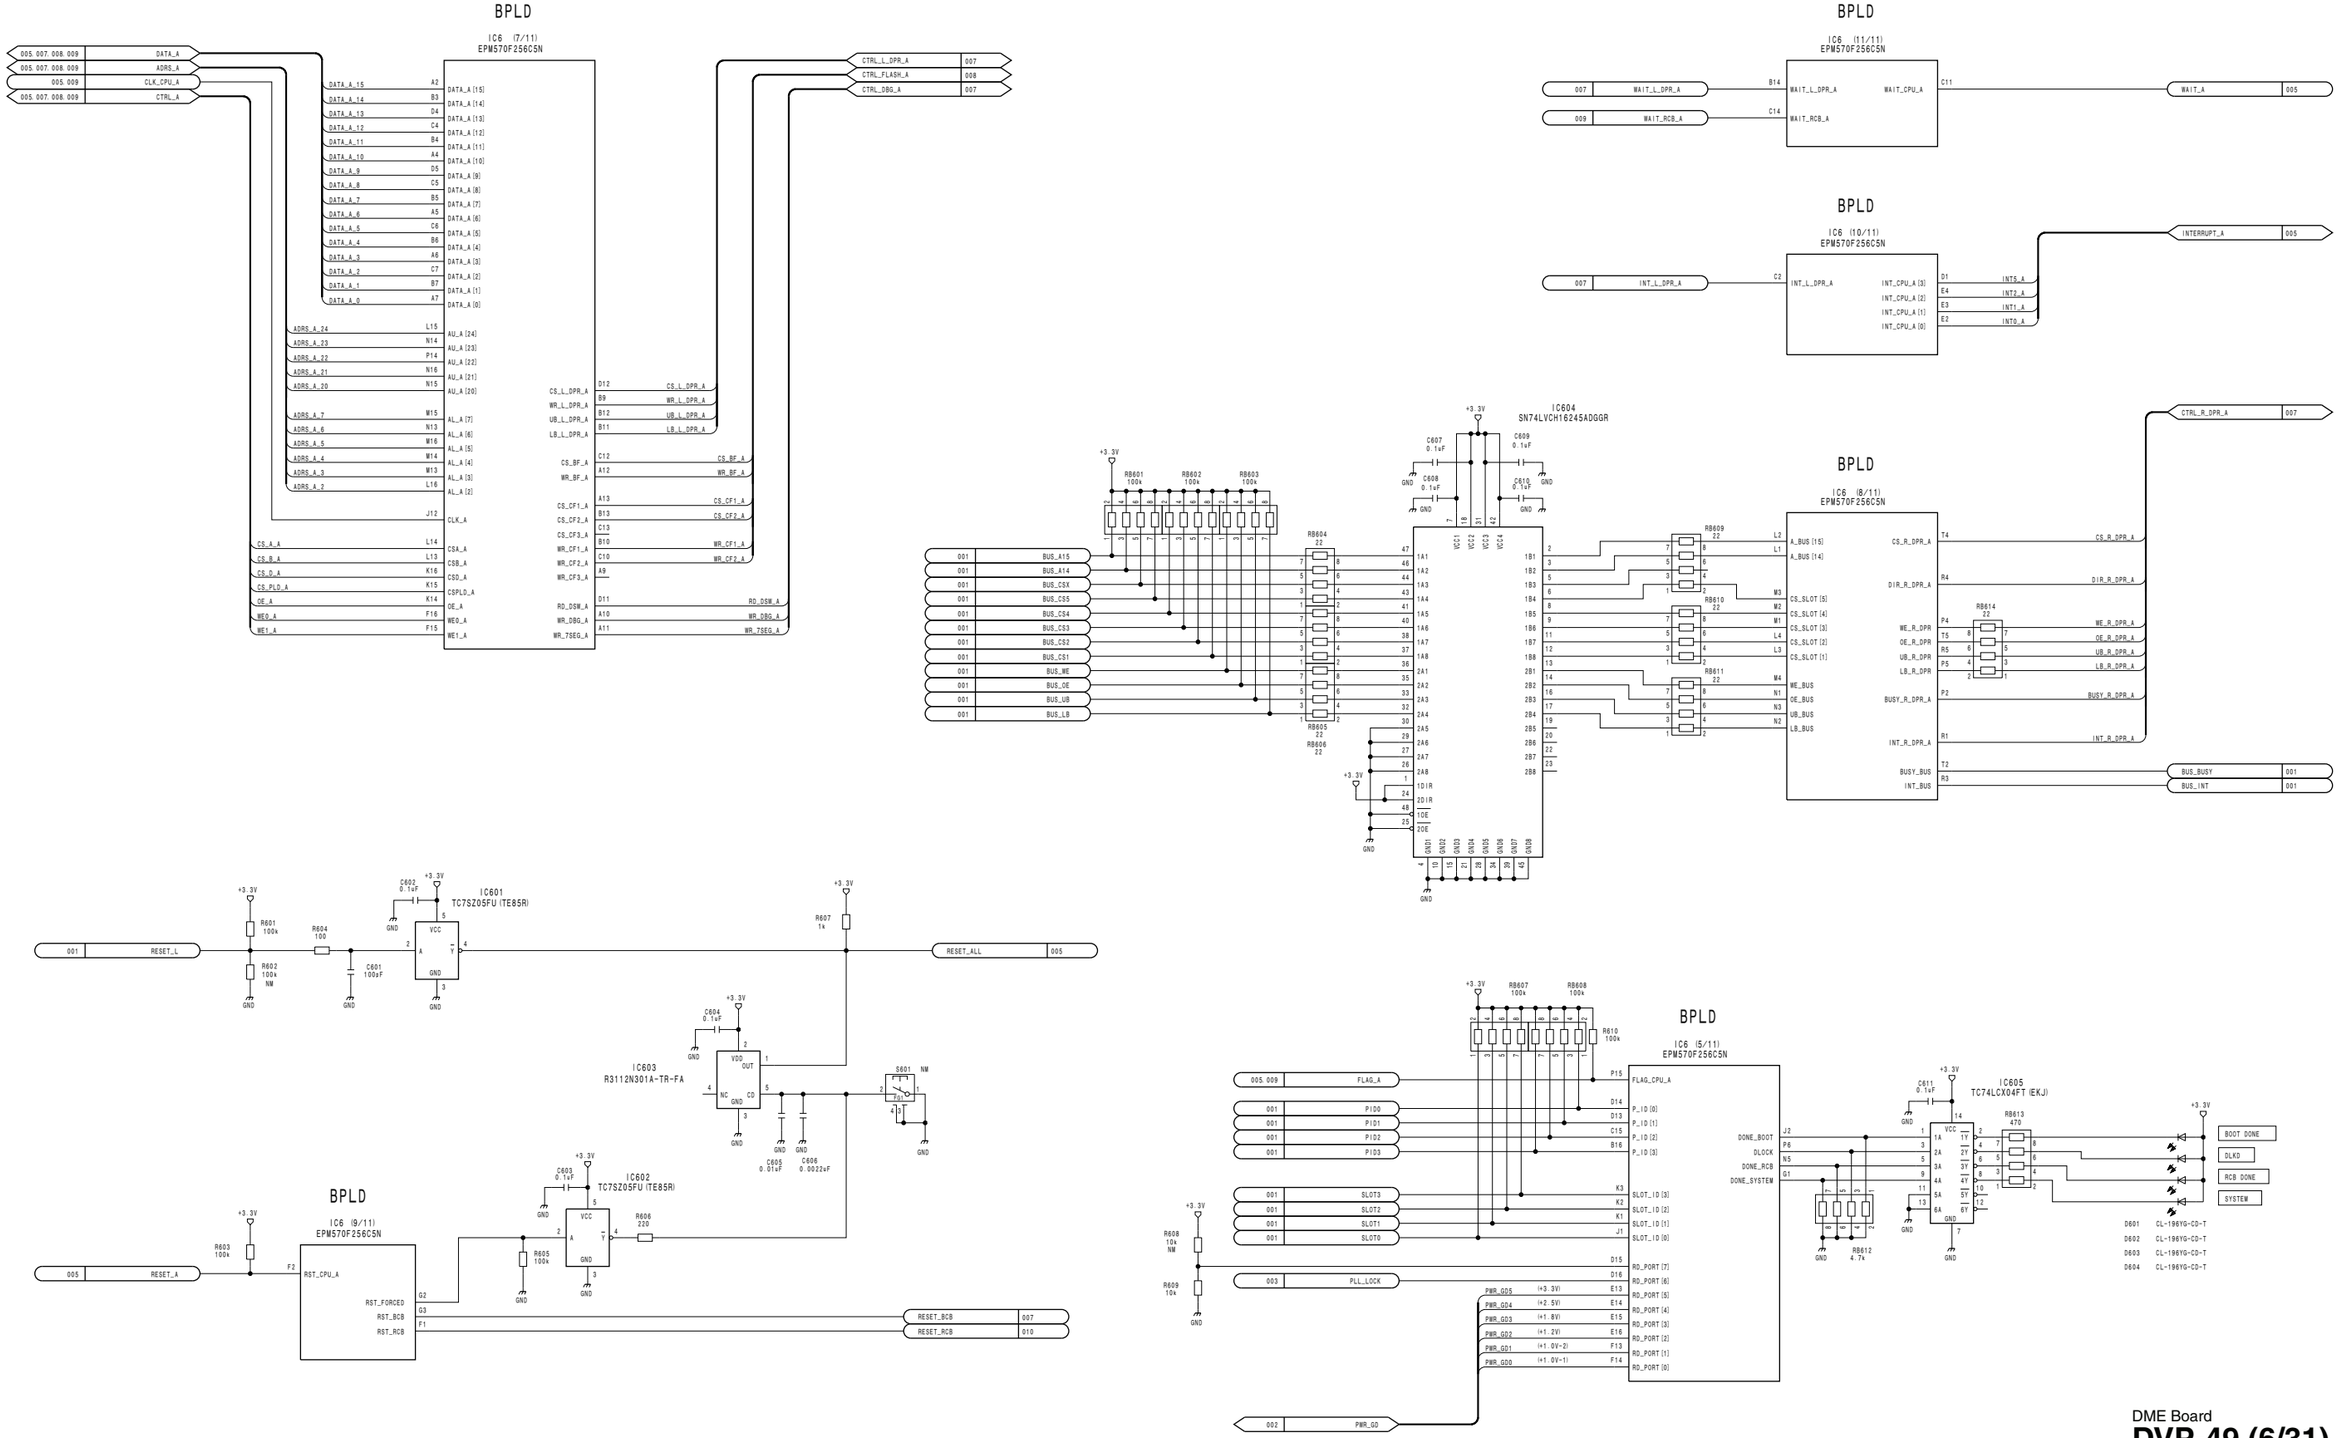


DME Board

DVP-49 (6/31)

BOARD NO. 1-877-213-12


MVS-6000_DVP-49_002_6

DVP-49 (7/31) **SUFFIX: -12**

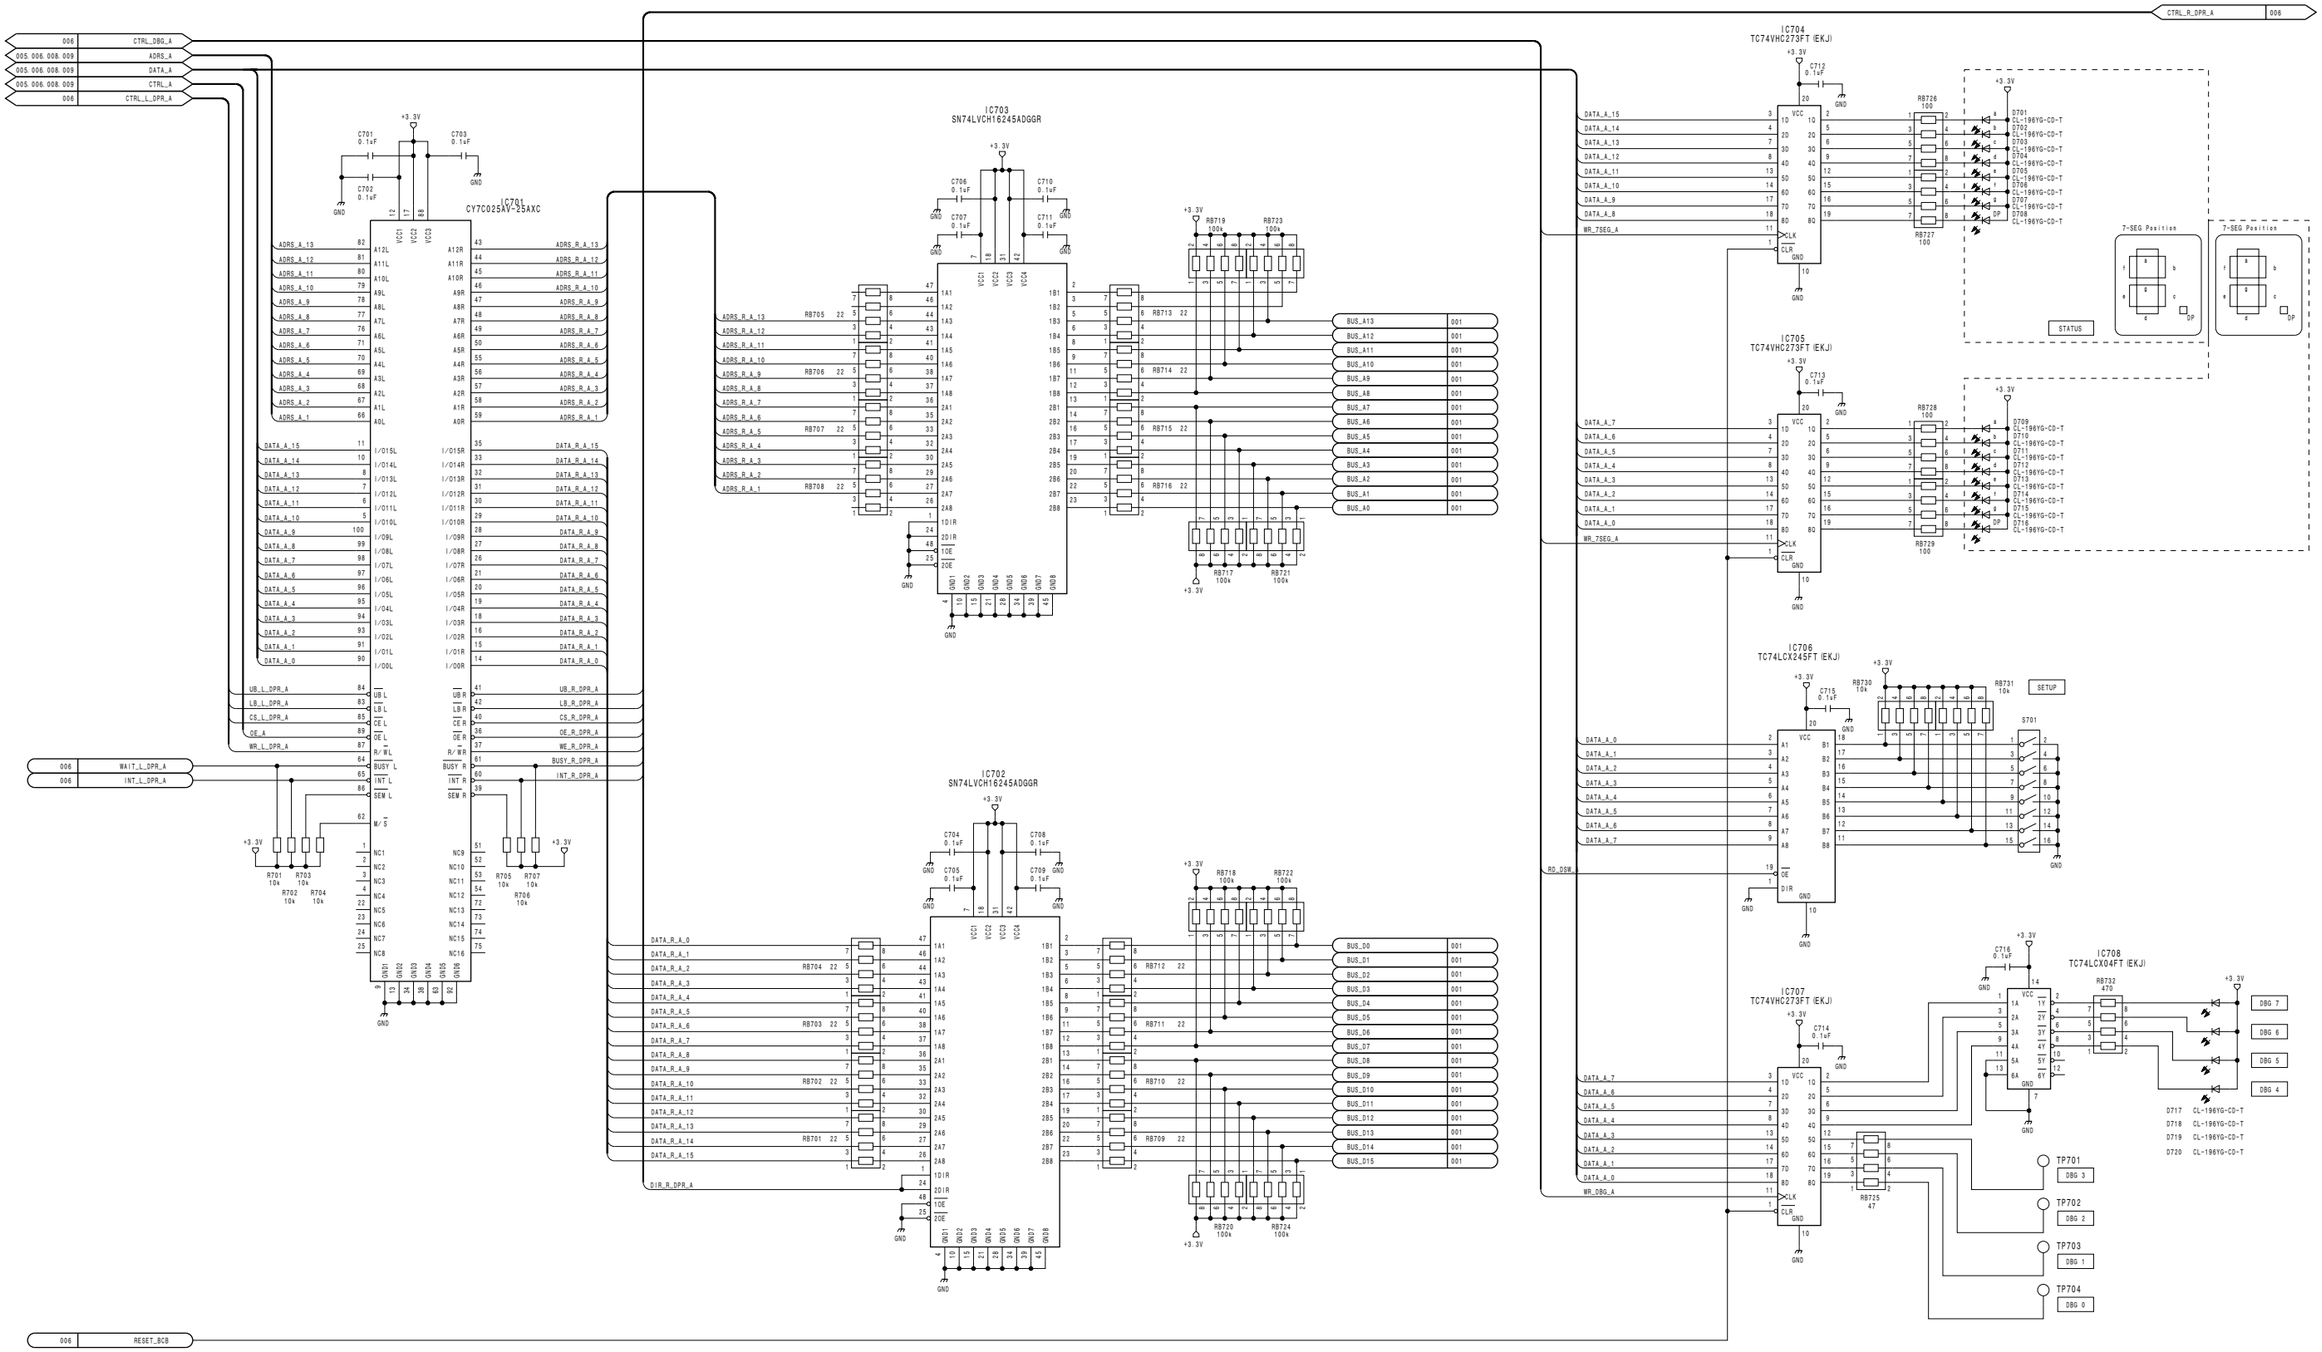

DME Board
DVP-49 (7/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_7


DVP-49 (8/31)
SUFFIX: -12

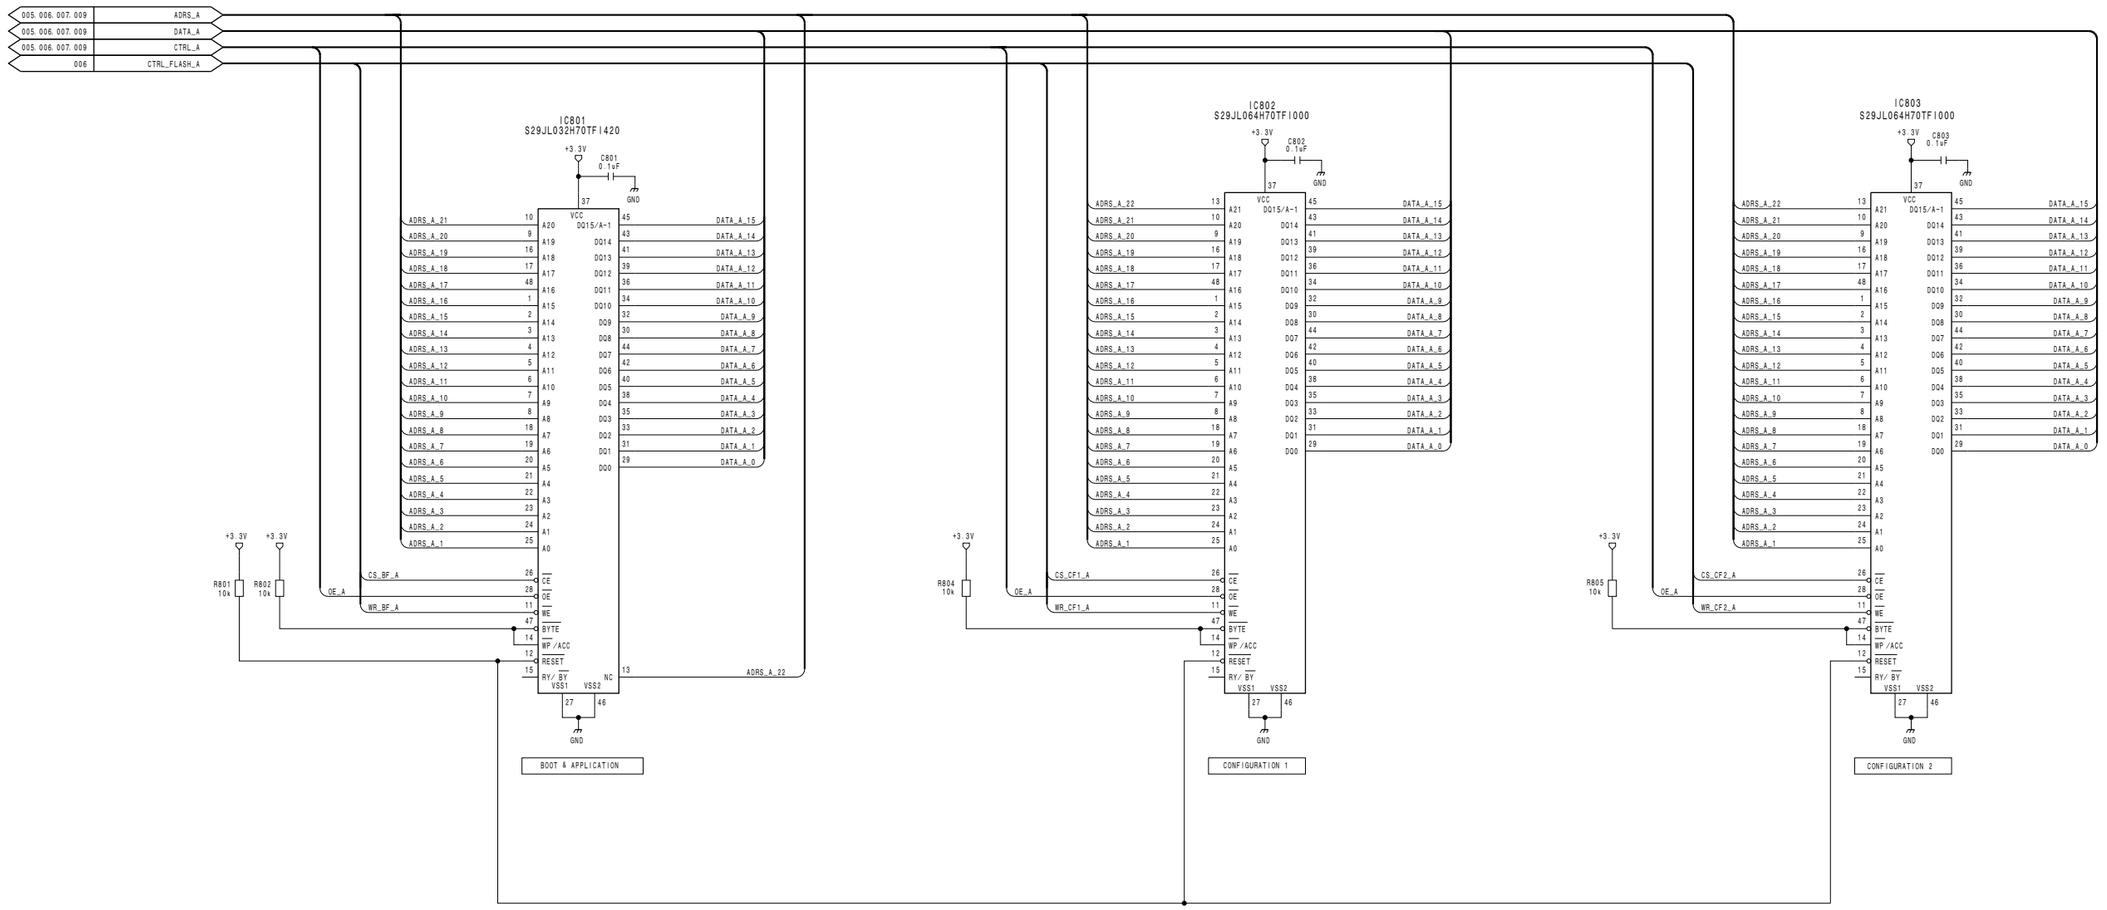


DME Board
DVP-49 (8/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_8


4-84

MVS-6000 MM

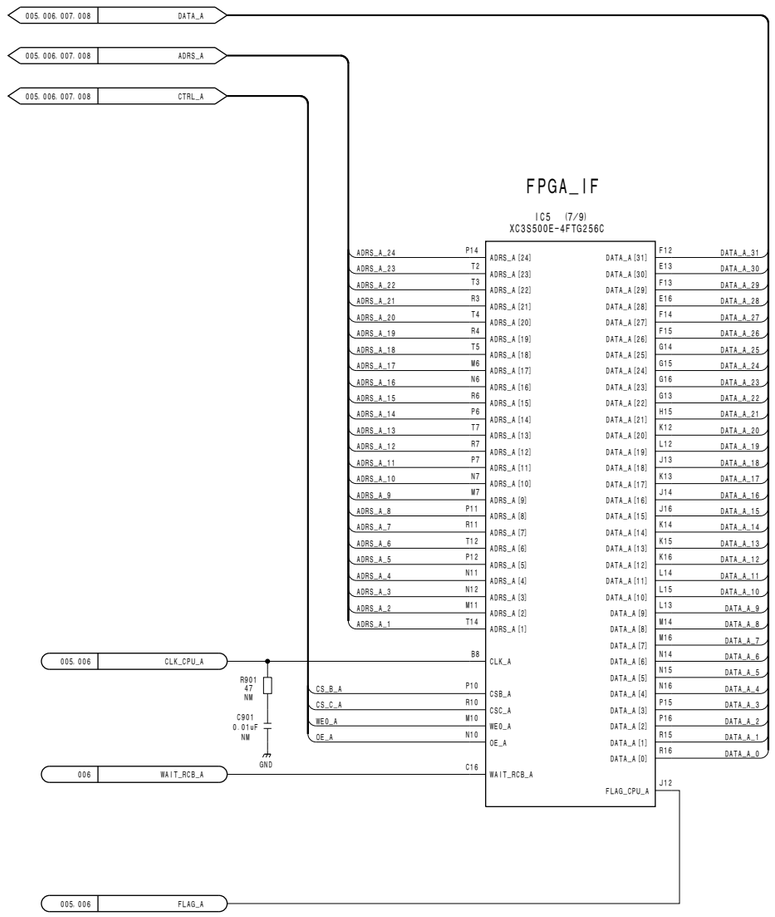

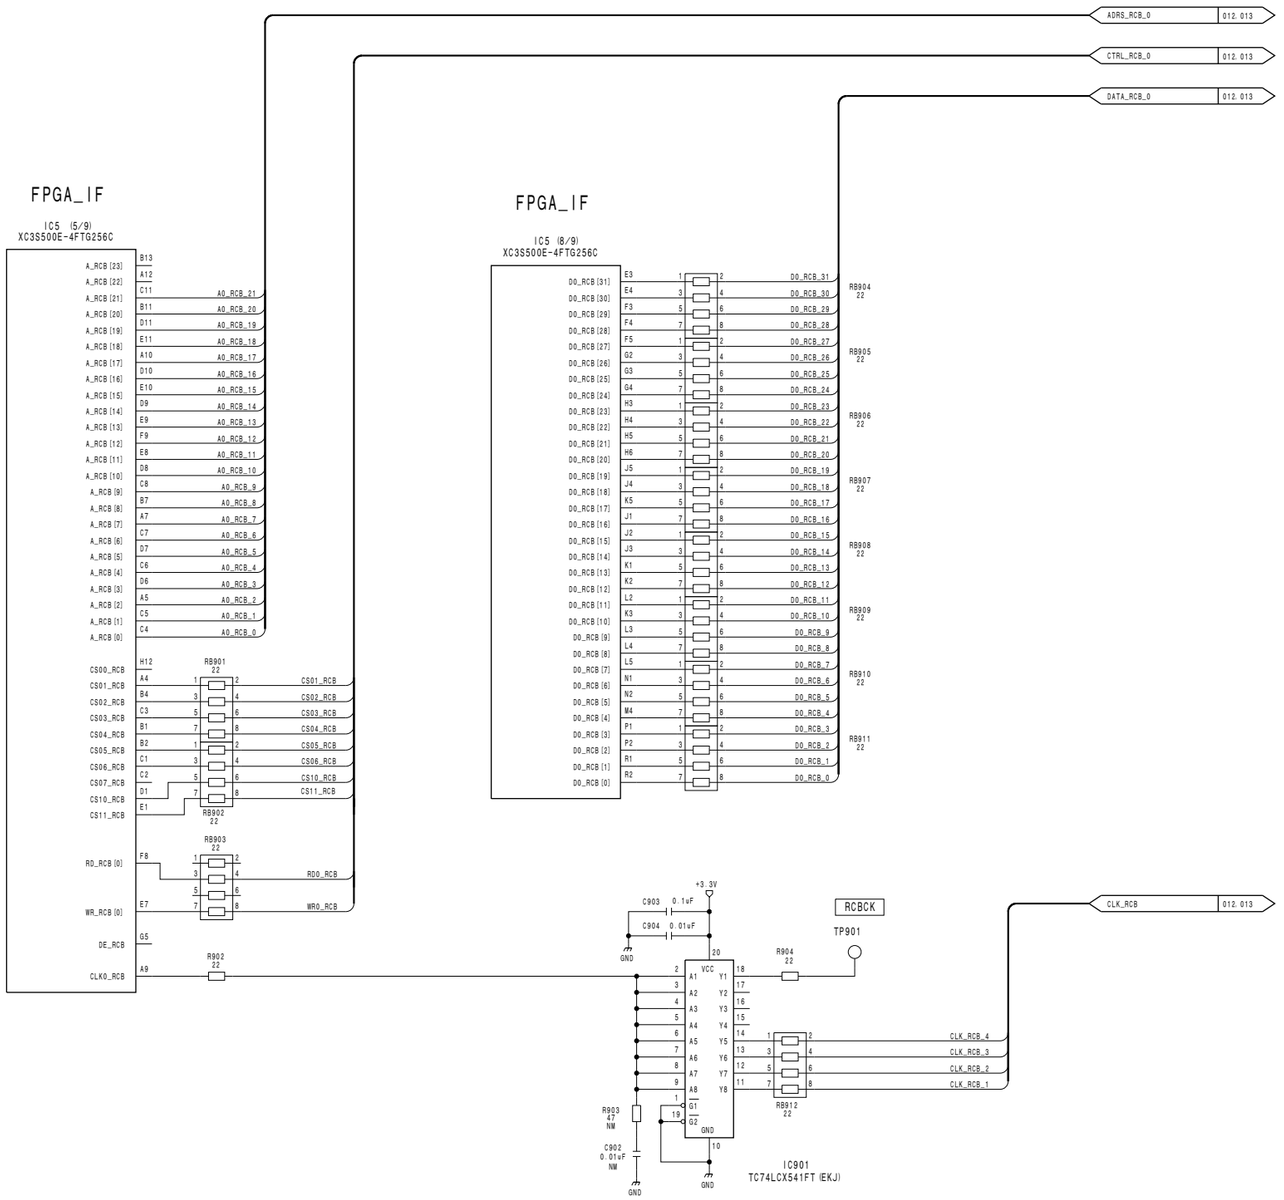


DME Board
DVP-49 (9/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_9

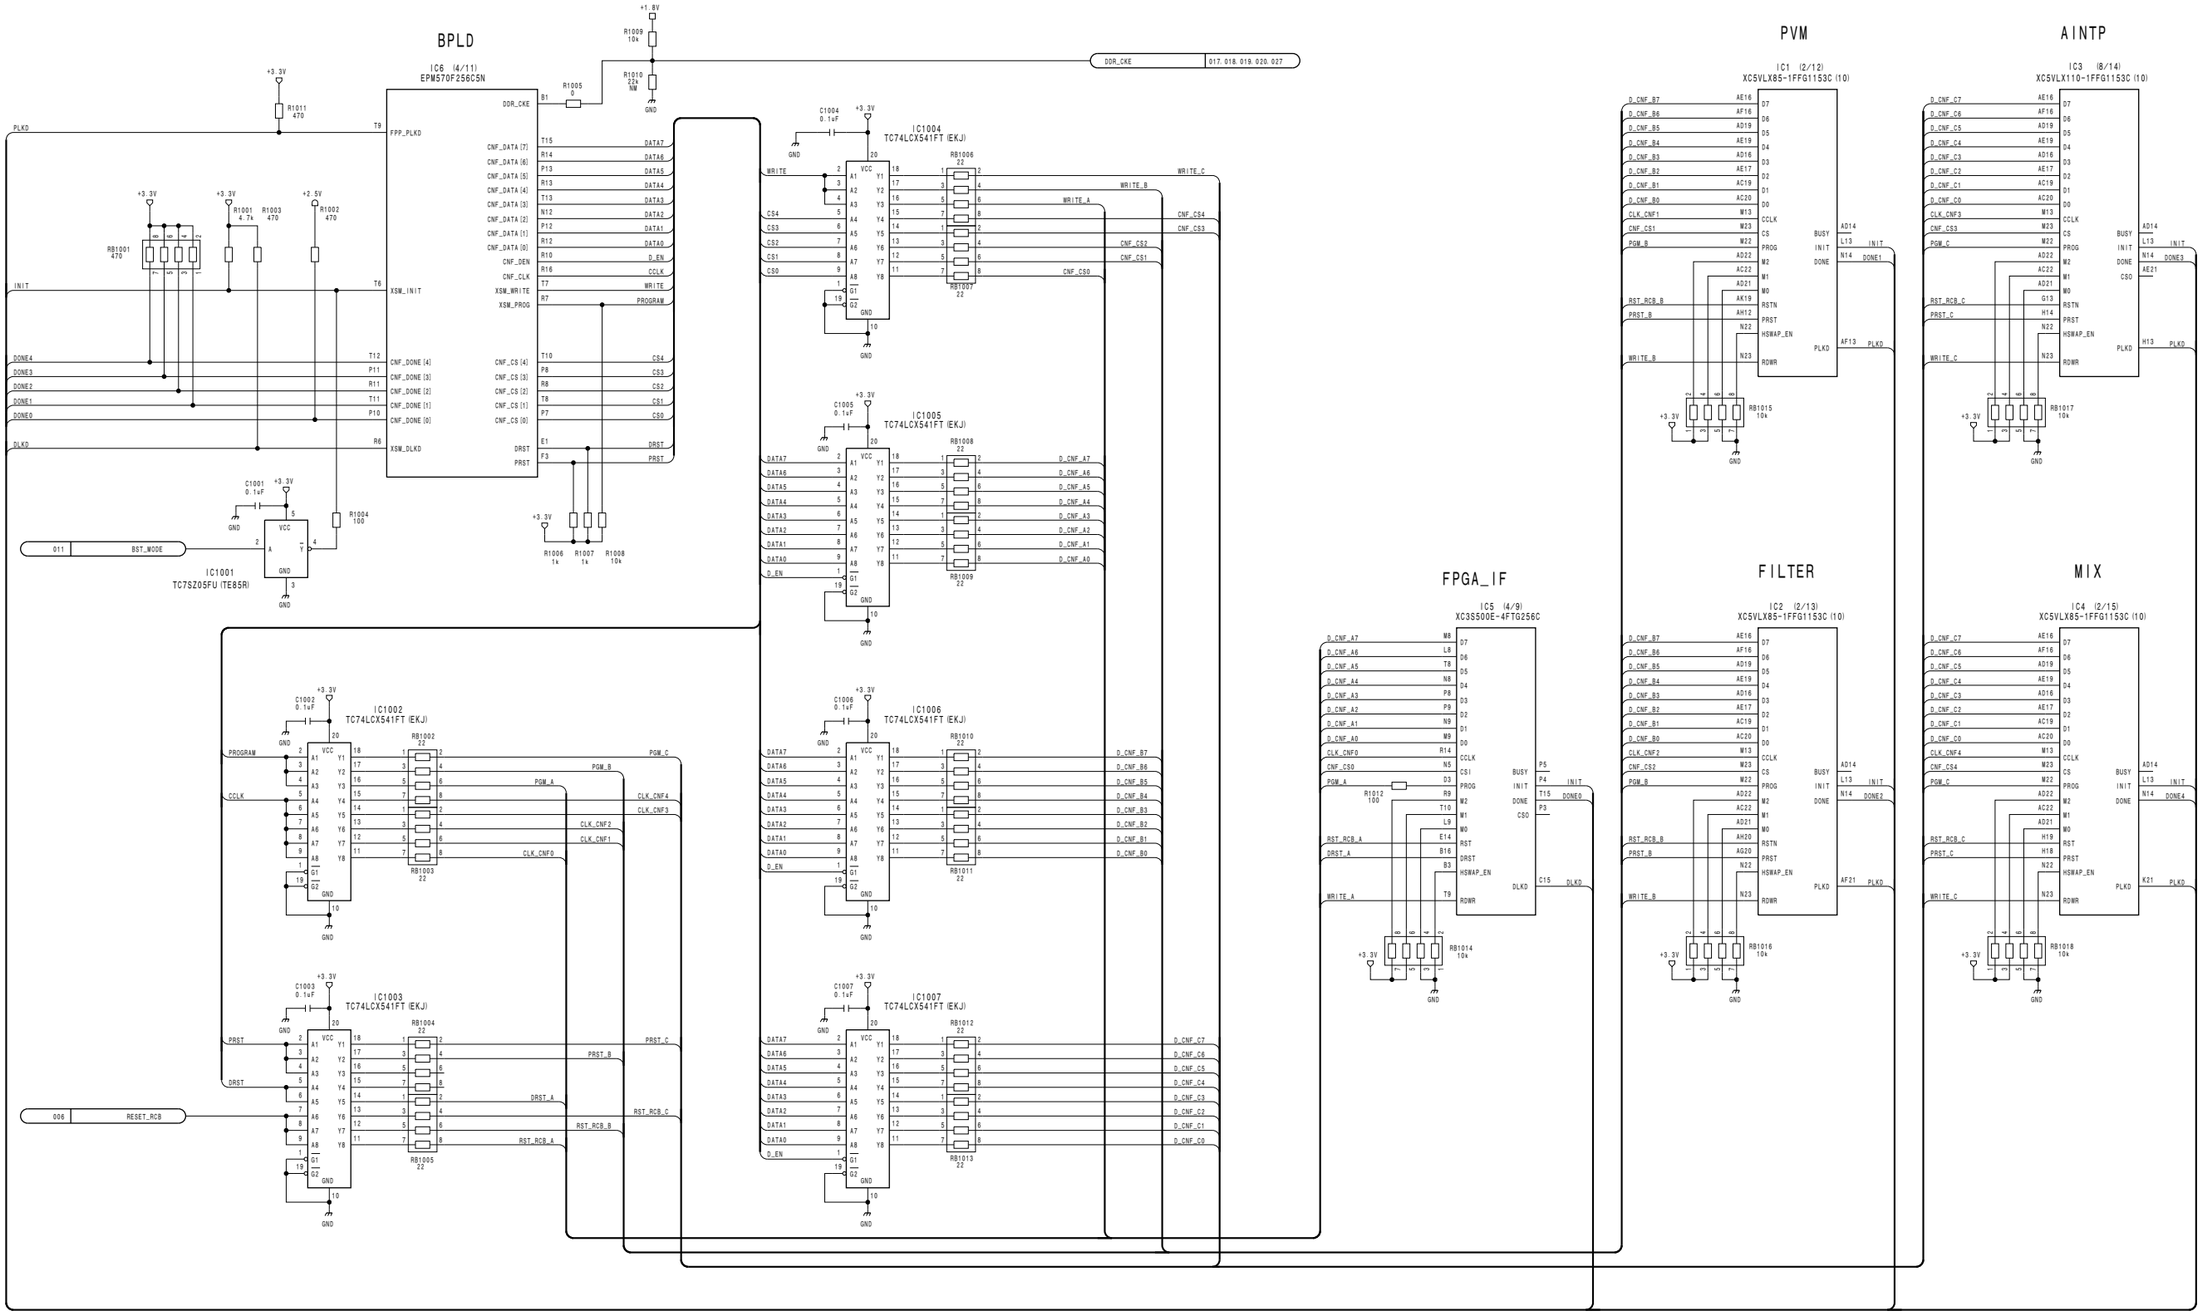


DME Board
DVP-49 (10/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_10

DVP-49 (11/31)
SUFFIX: -12

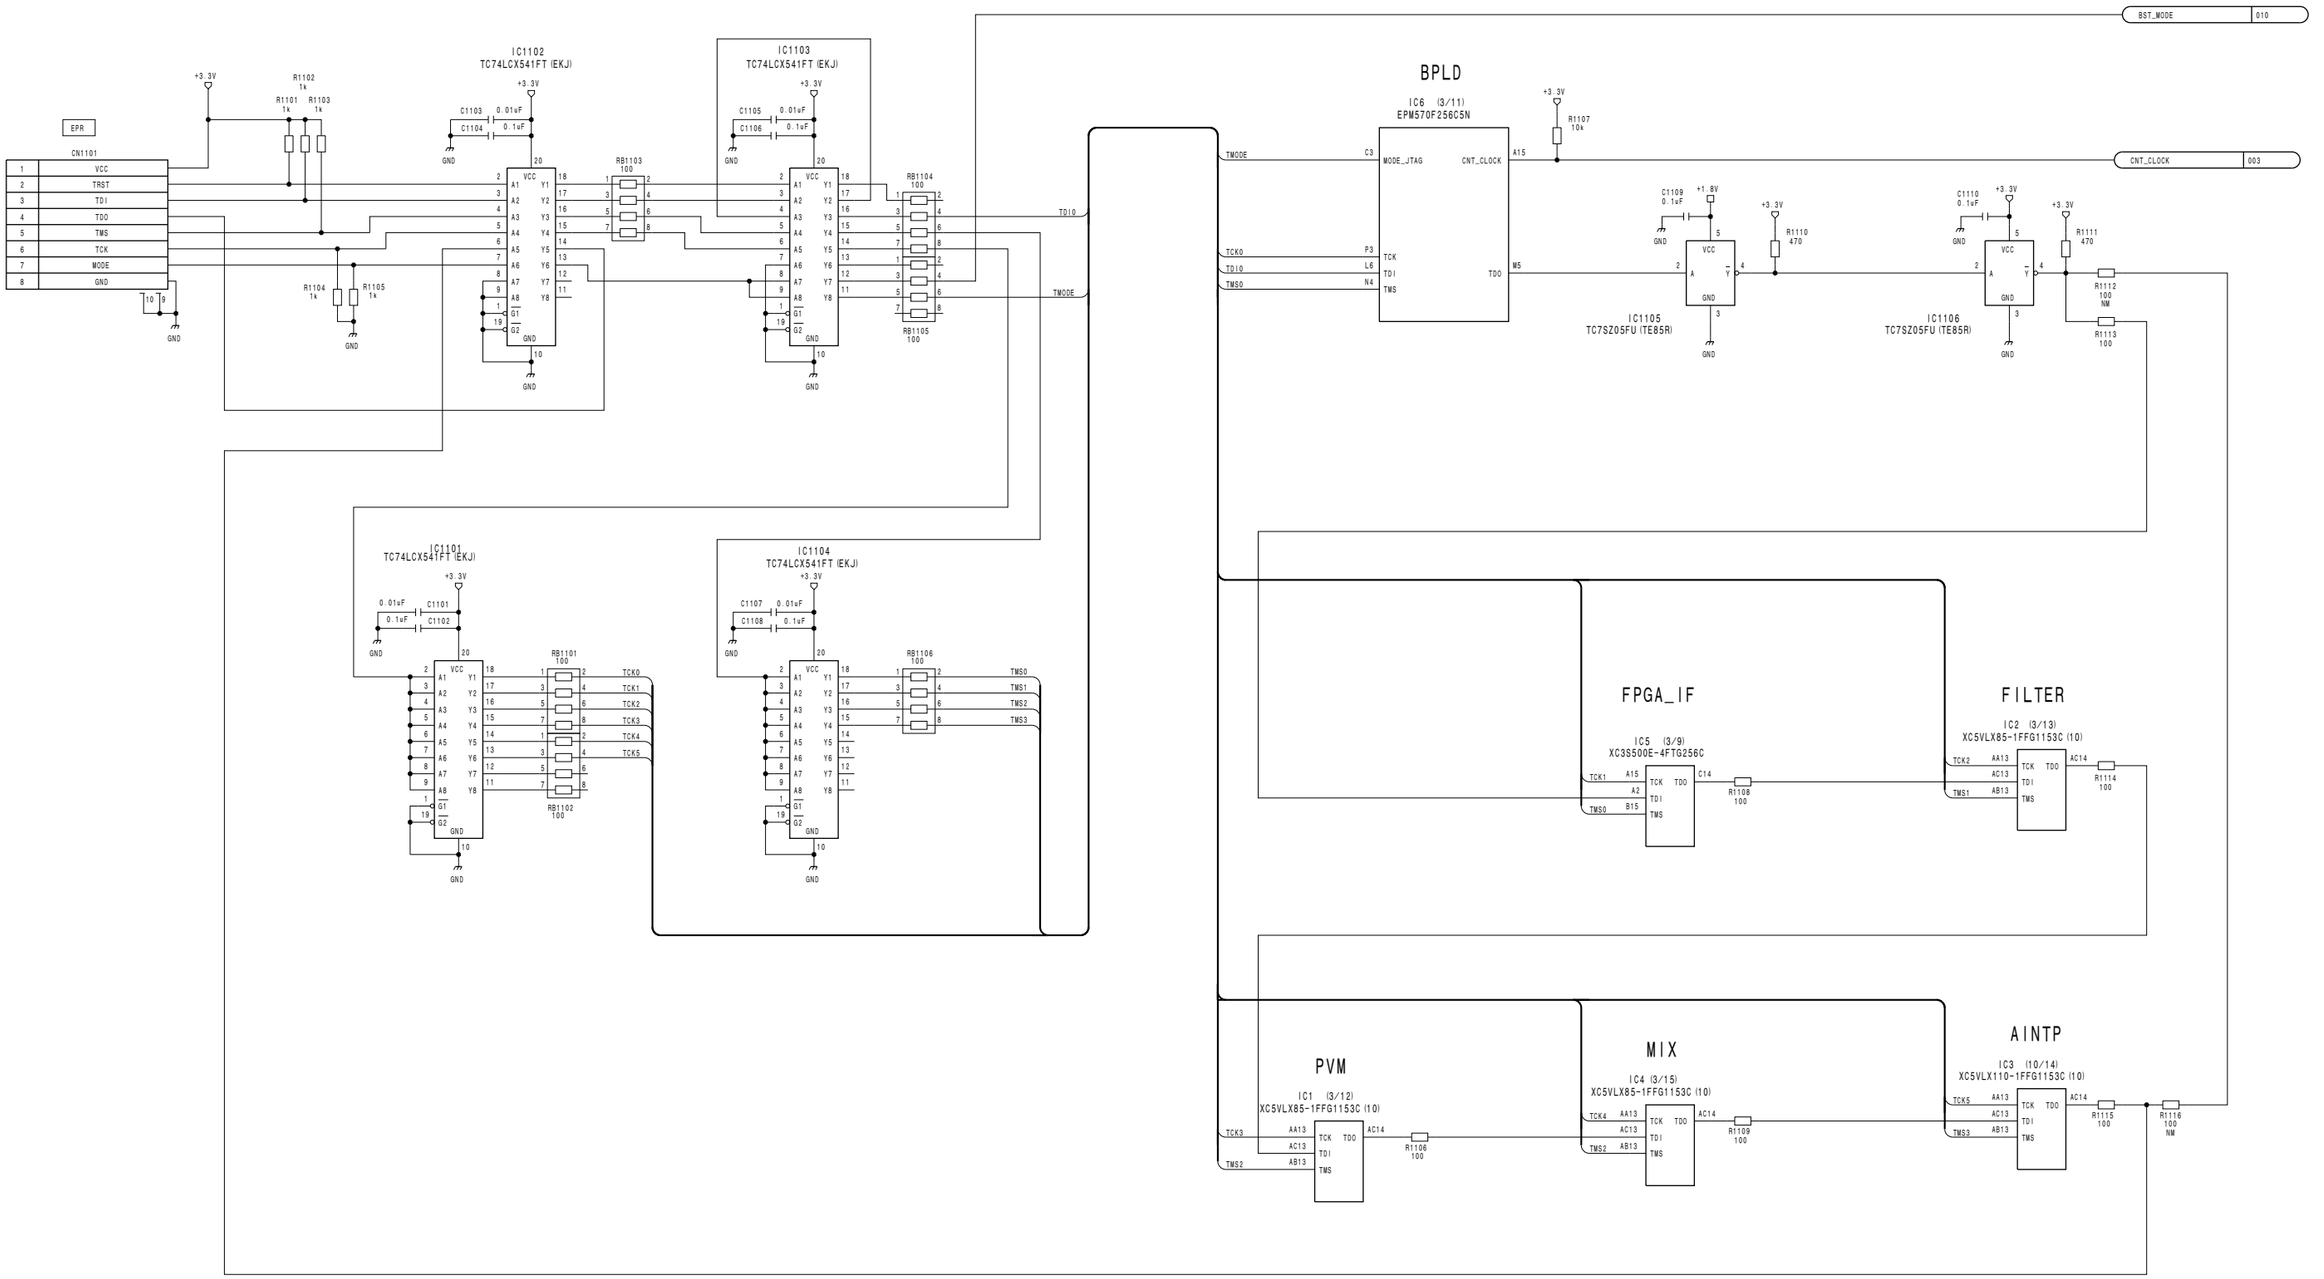


DME Board
DVP-49 (11/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_11

DVP-49 (12/31)
SUFFIX: -12

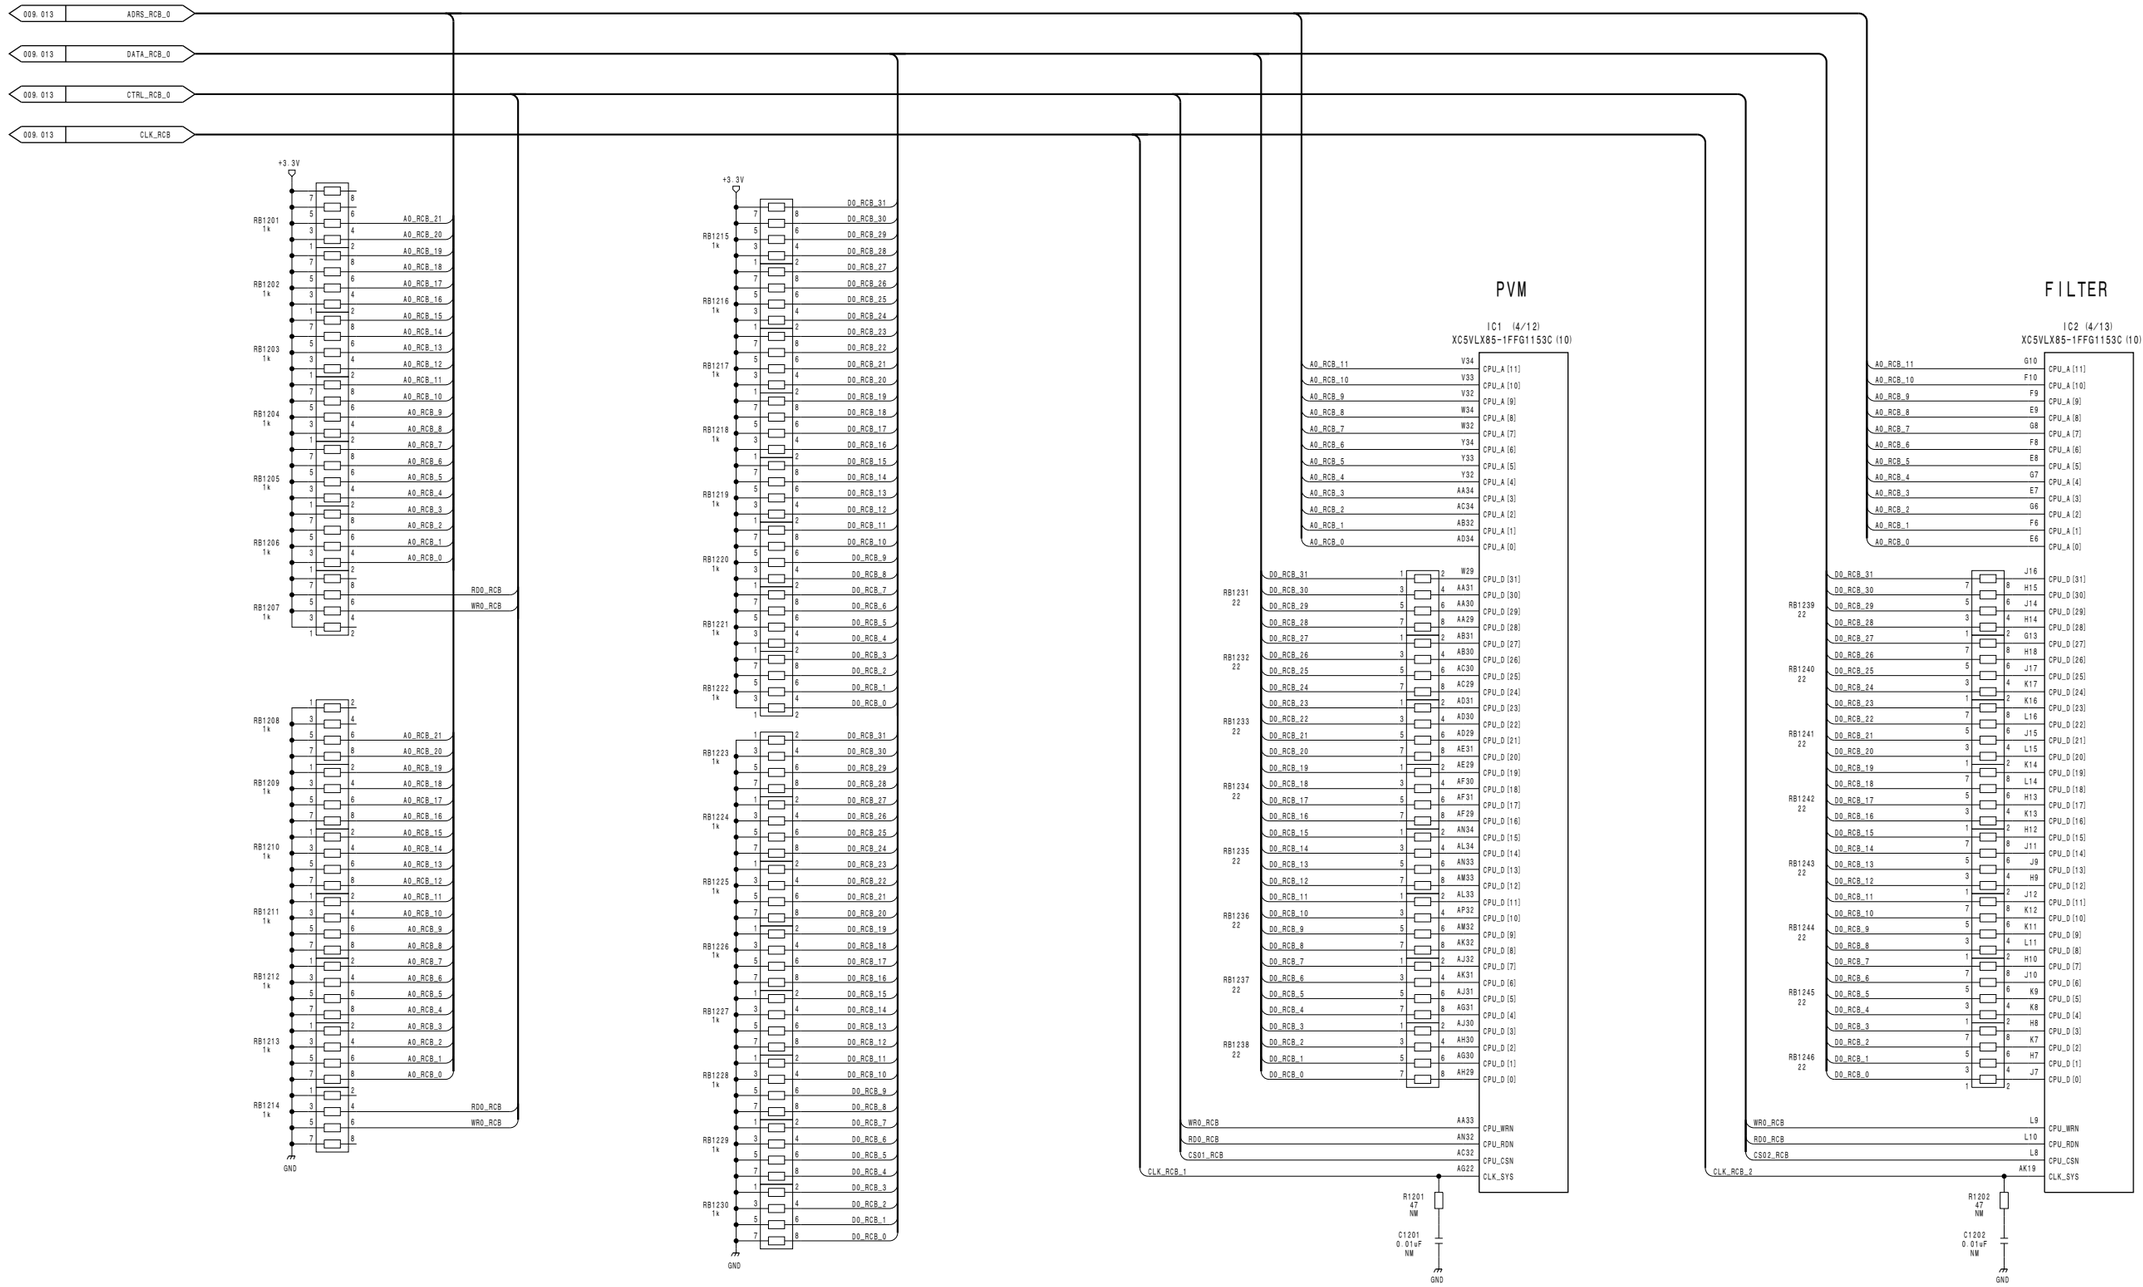


DME Board
DVP-49 (12/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_12

DVP-49 (13/31) **SUFFIX: -12**

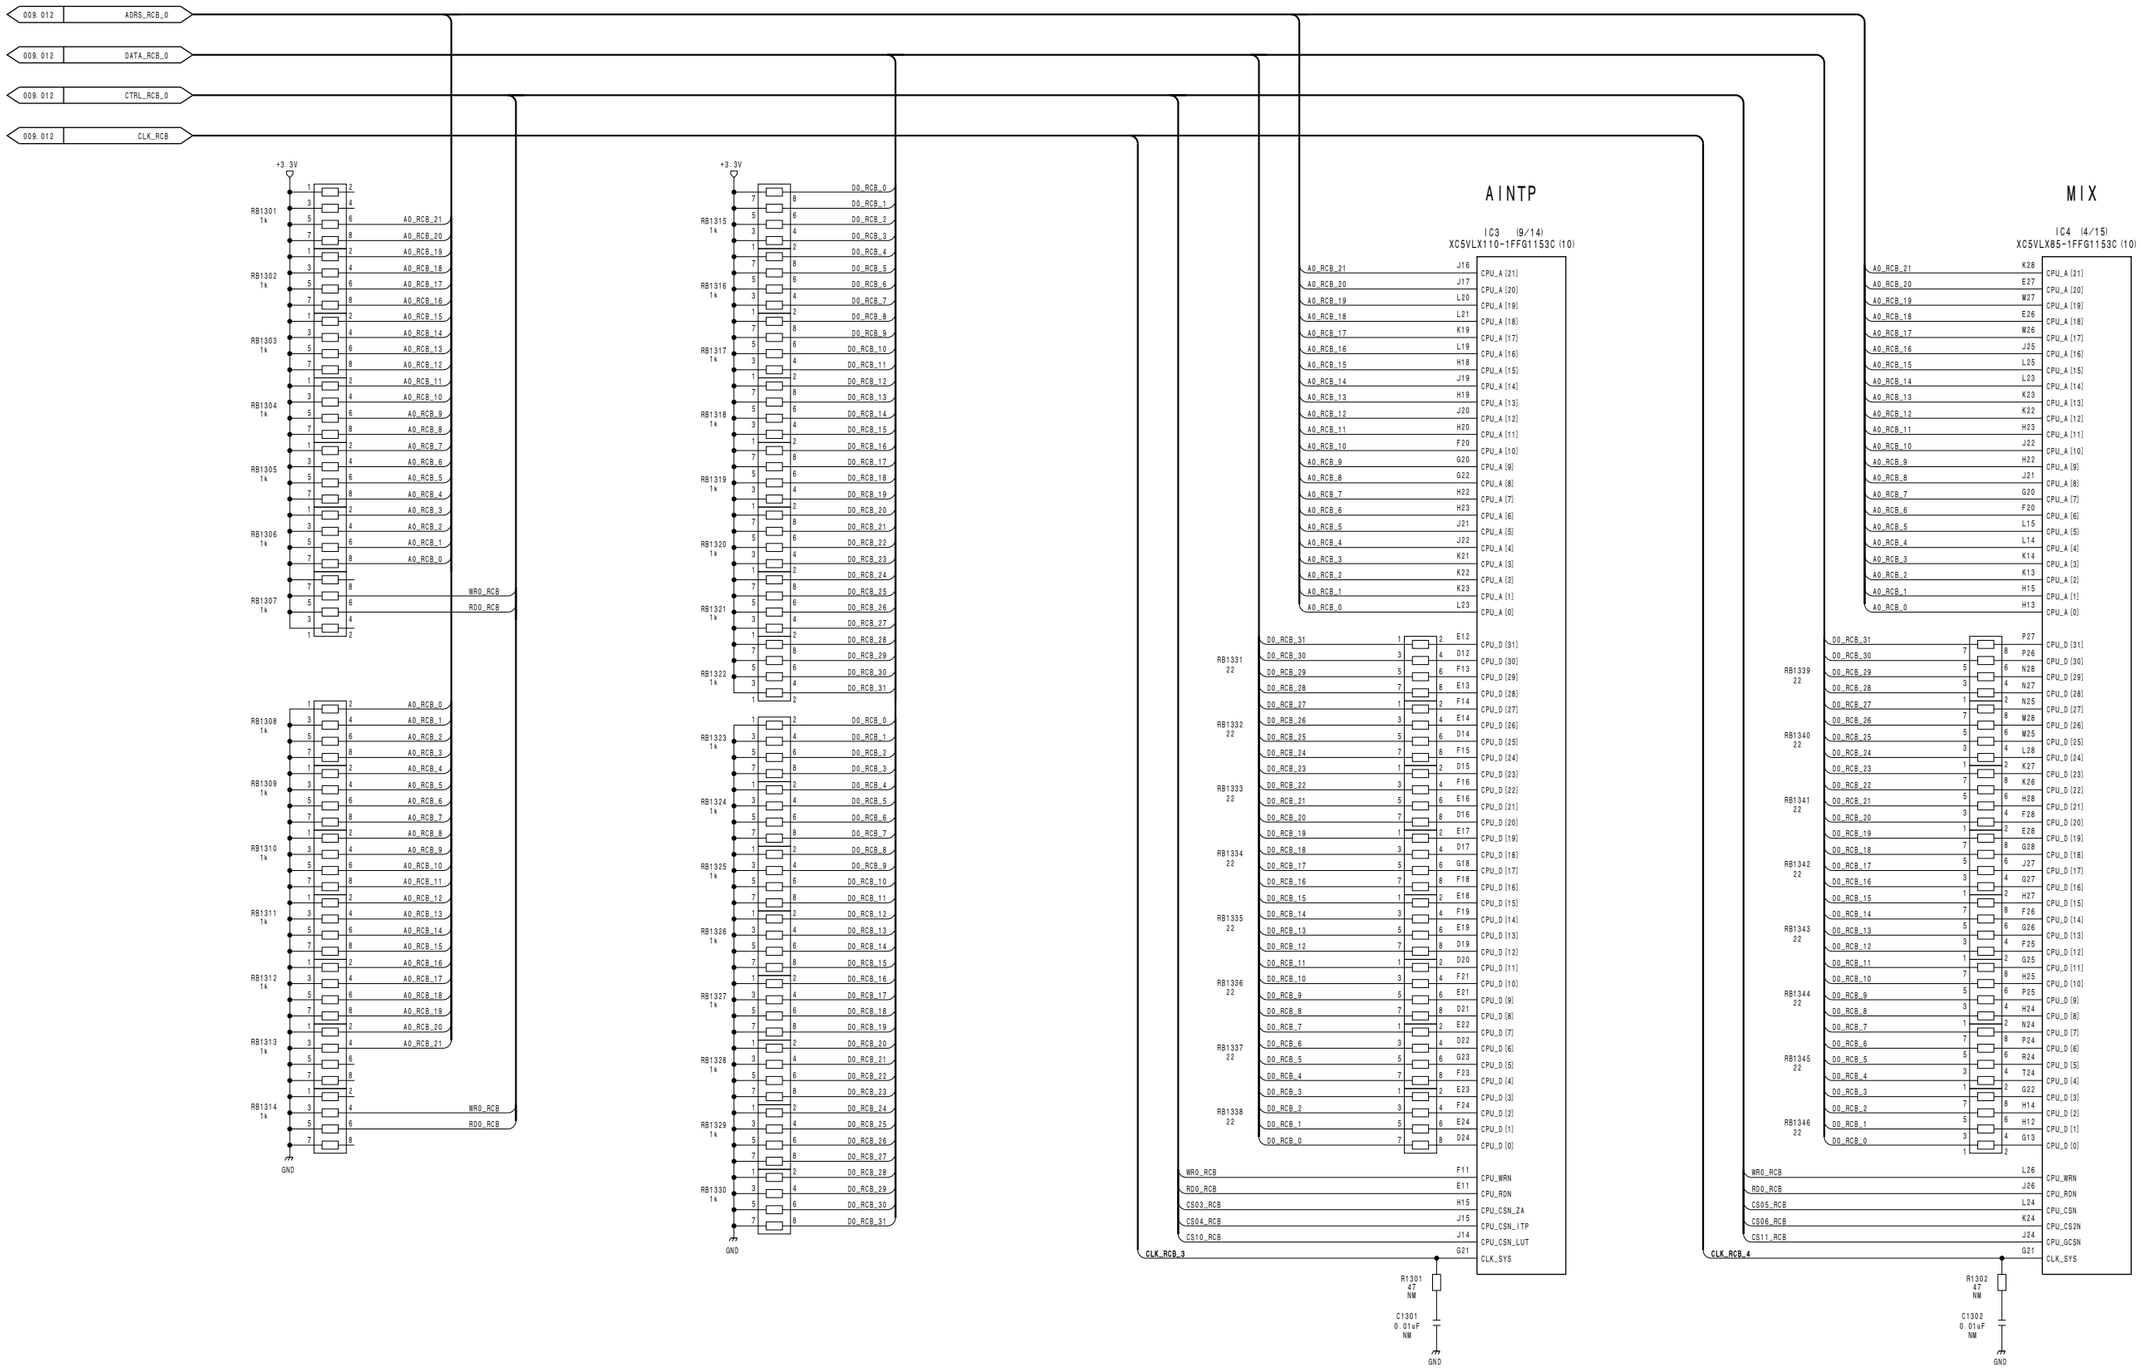


DME Board
DVP-49 (13/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_13

DVP-49 (14/31) **SUFFIX: -12**

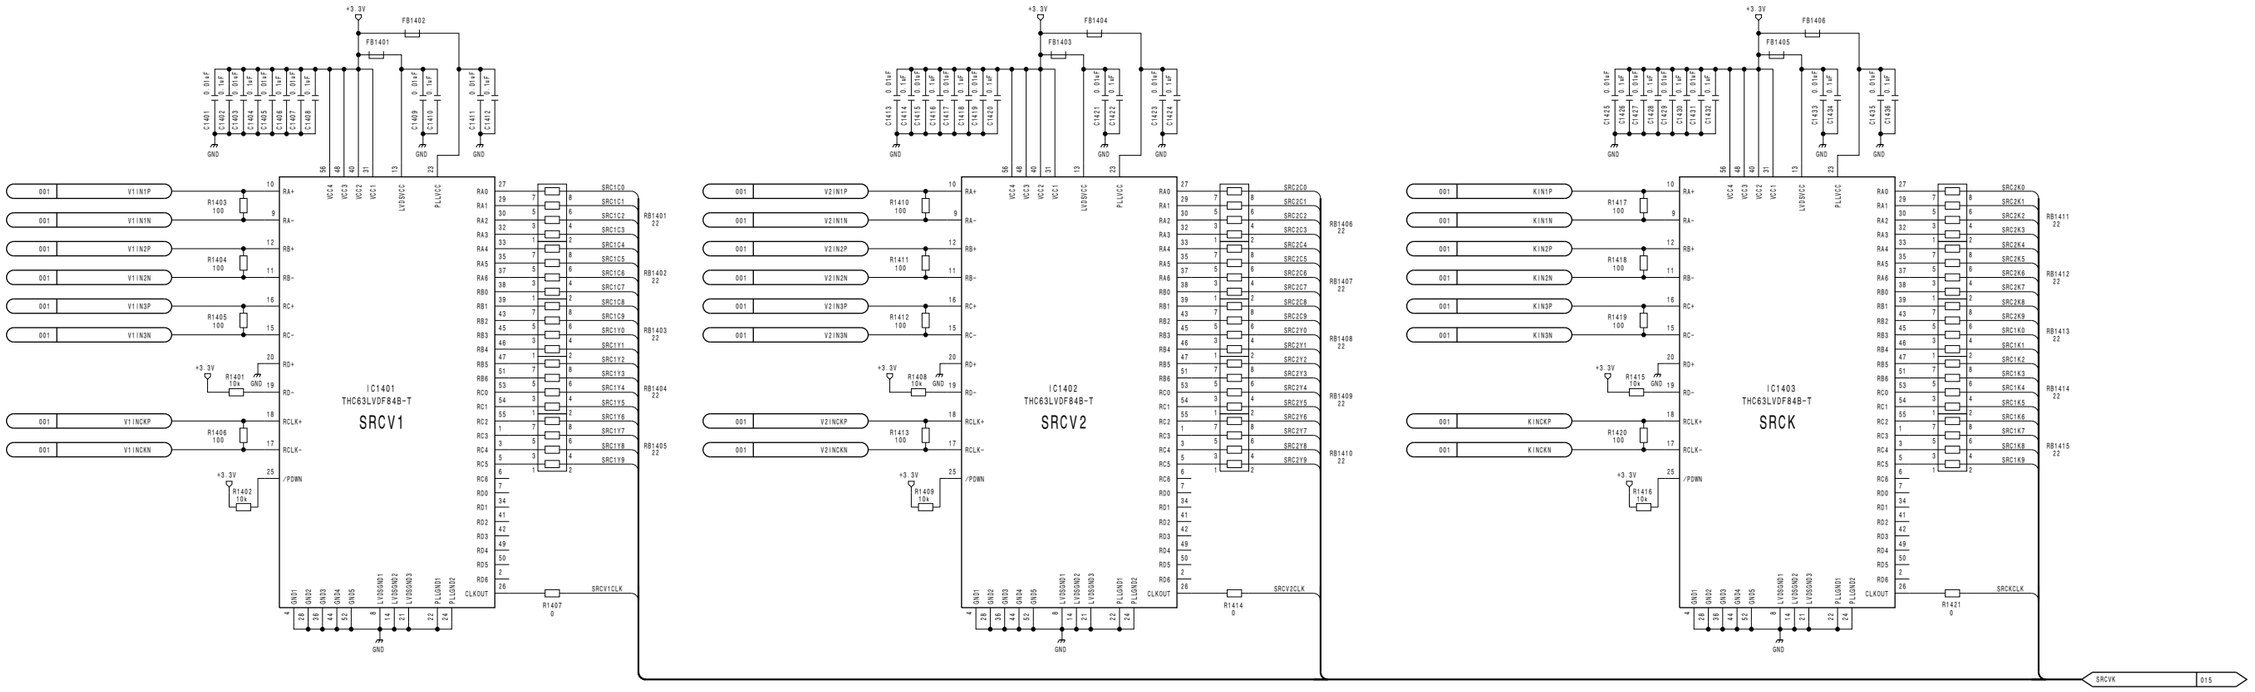

DME Board
DVP-49 (14/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_14


DVP-49 (15/31) **SUFFIX: -12**

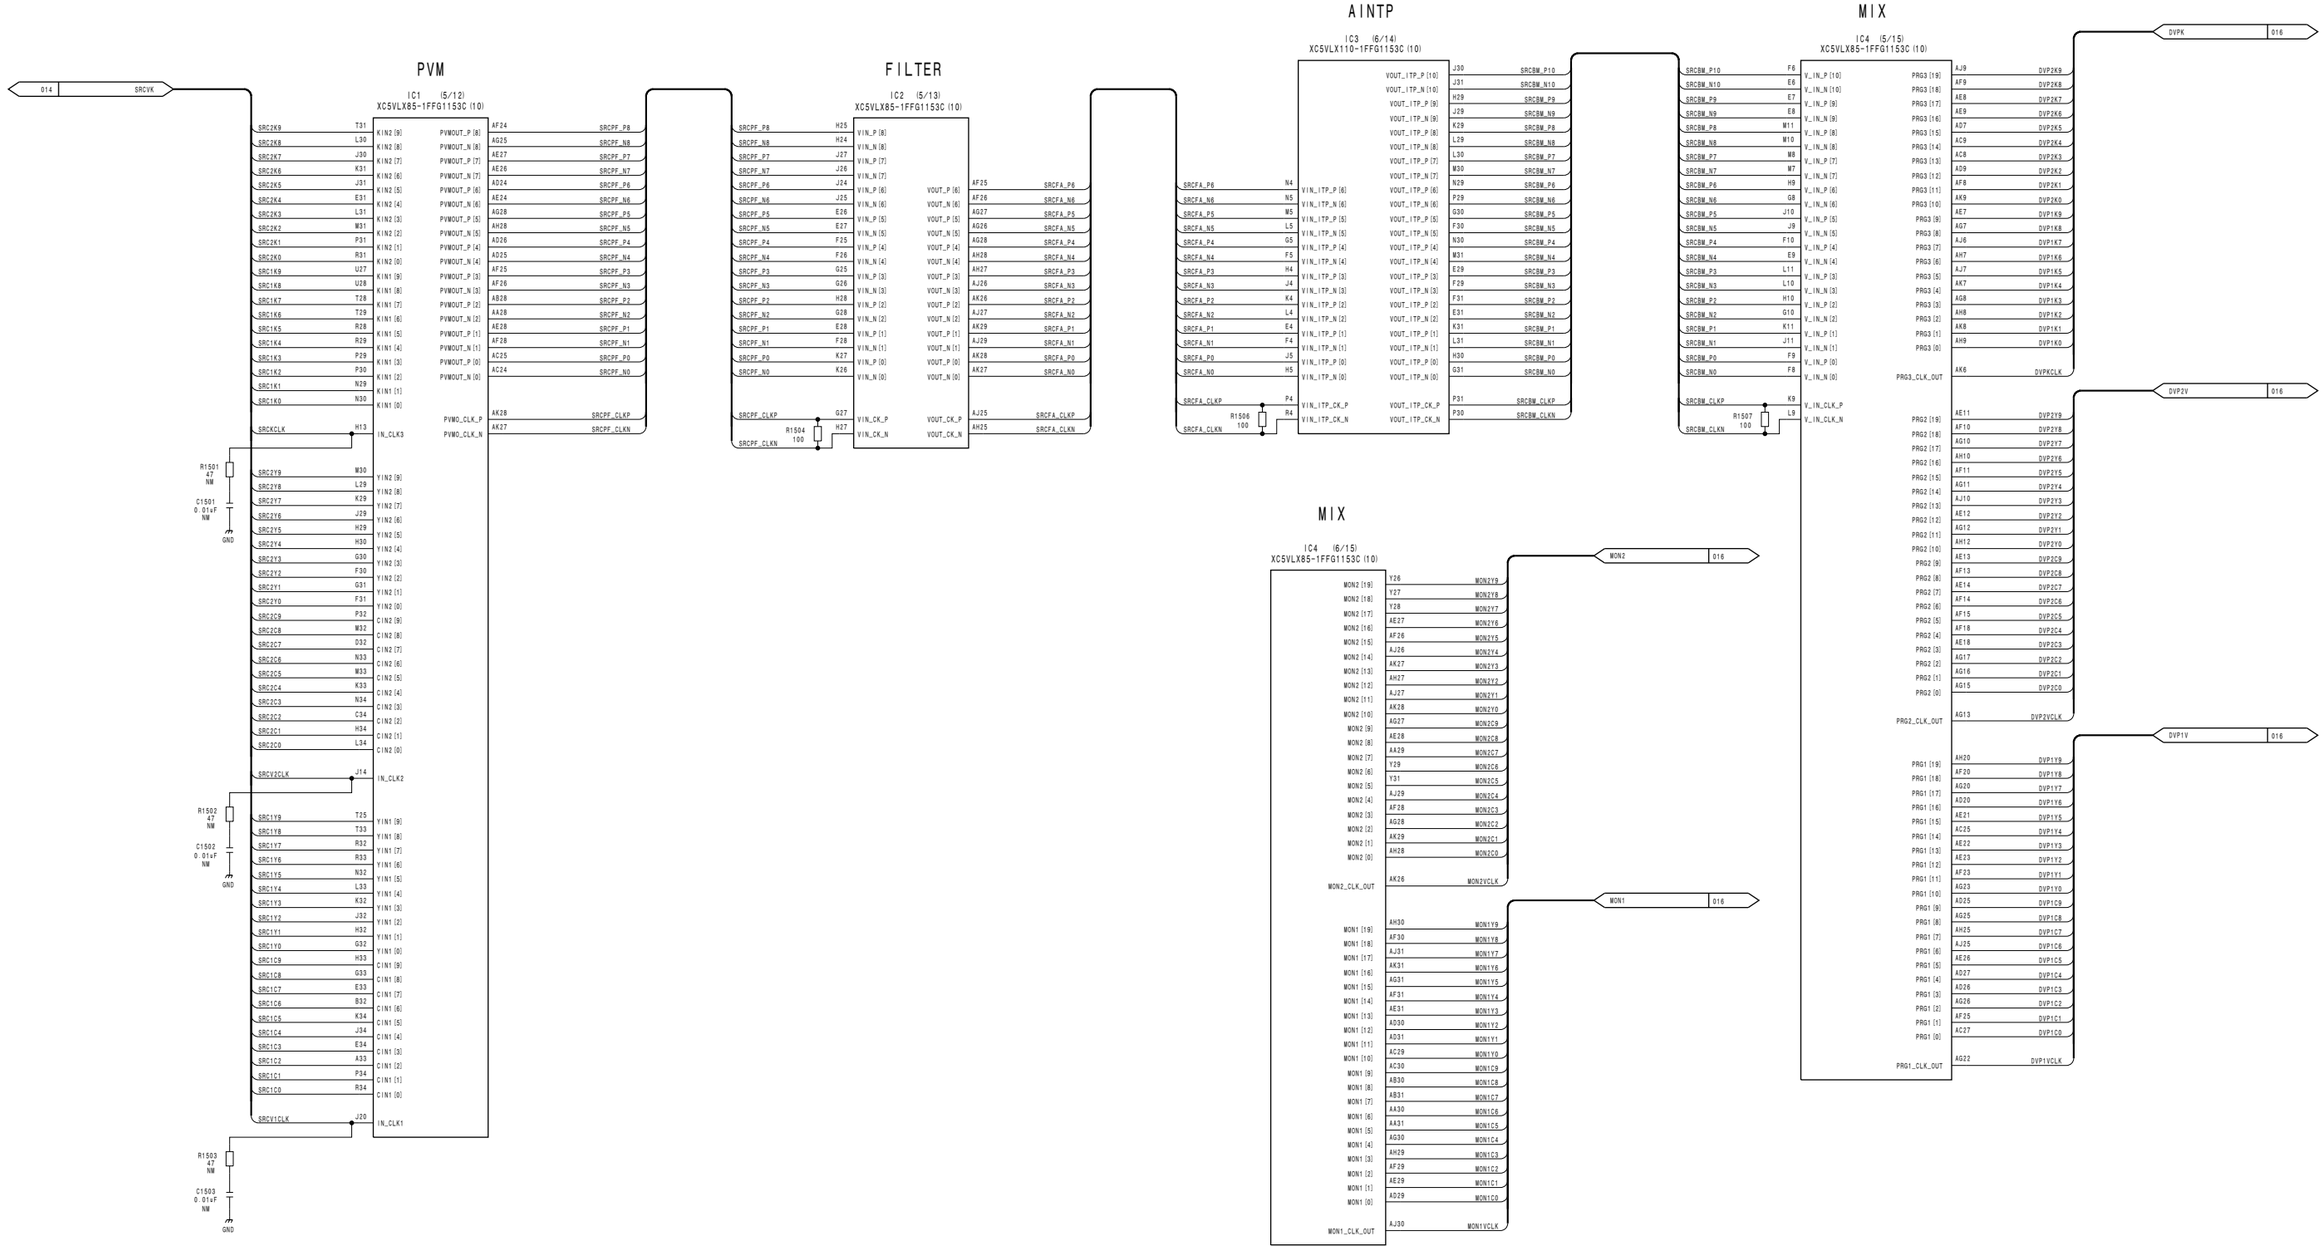



DME Board
DVP-49 (15/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_15


DVP-49 (16/31)
SUFFIX: -12

DVP-49 (16/31)
SUFFIX: -12

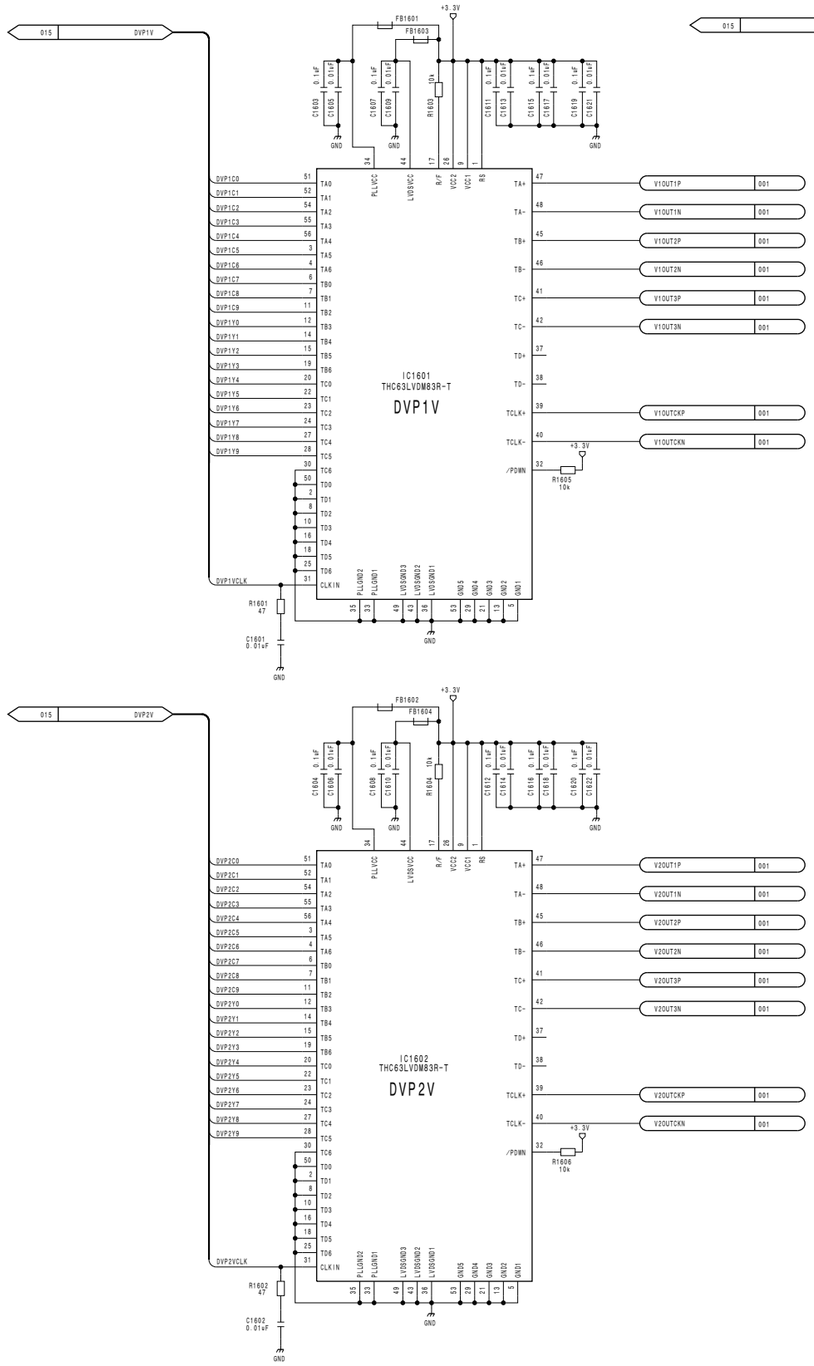

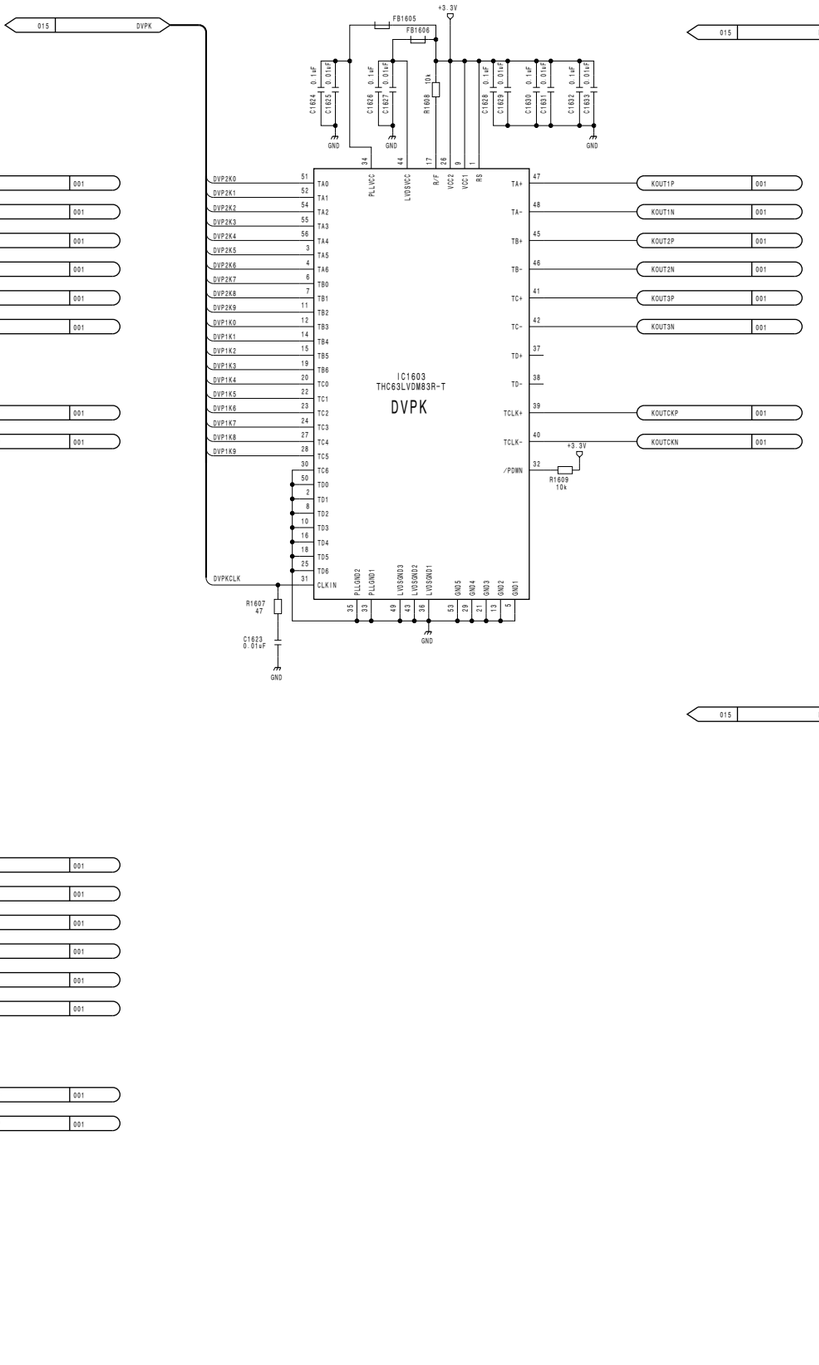


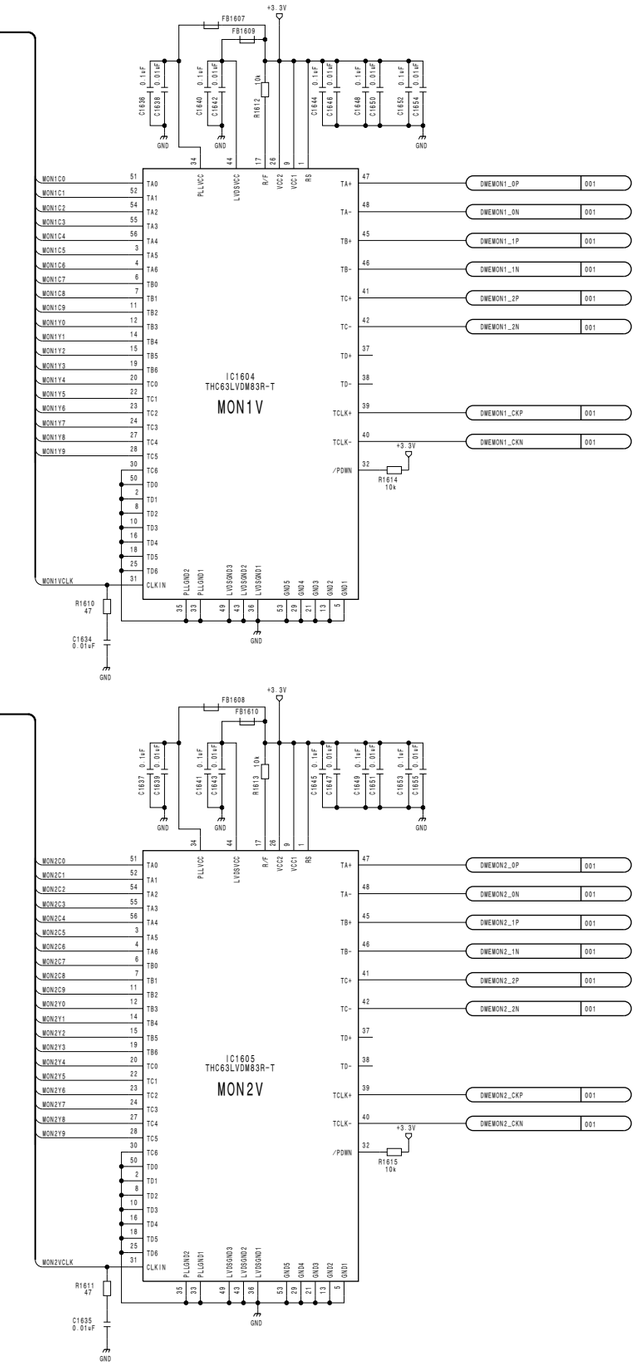

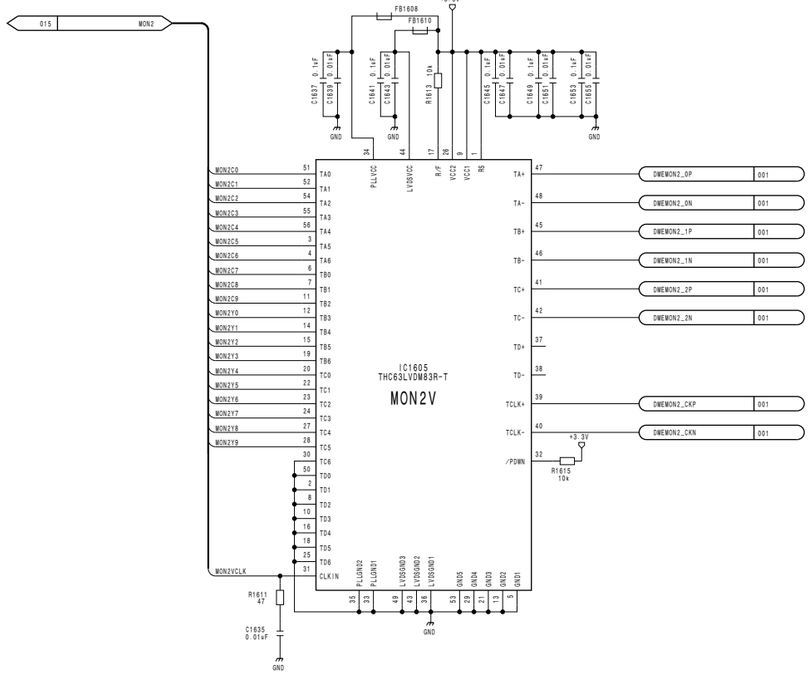


DME Board
DVP-49 (16/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_16

DVP-49 (17/31)
SUFFIX: -12

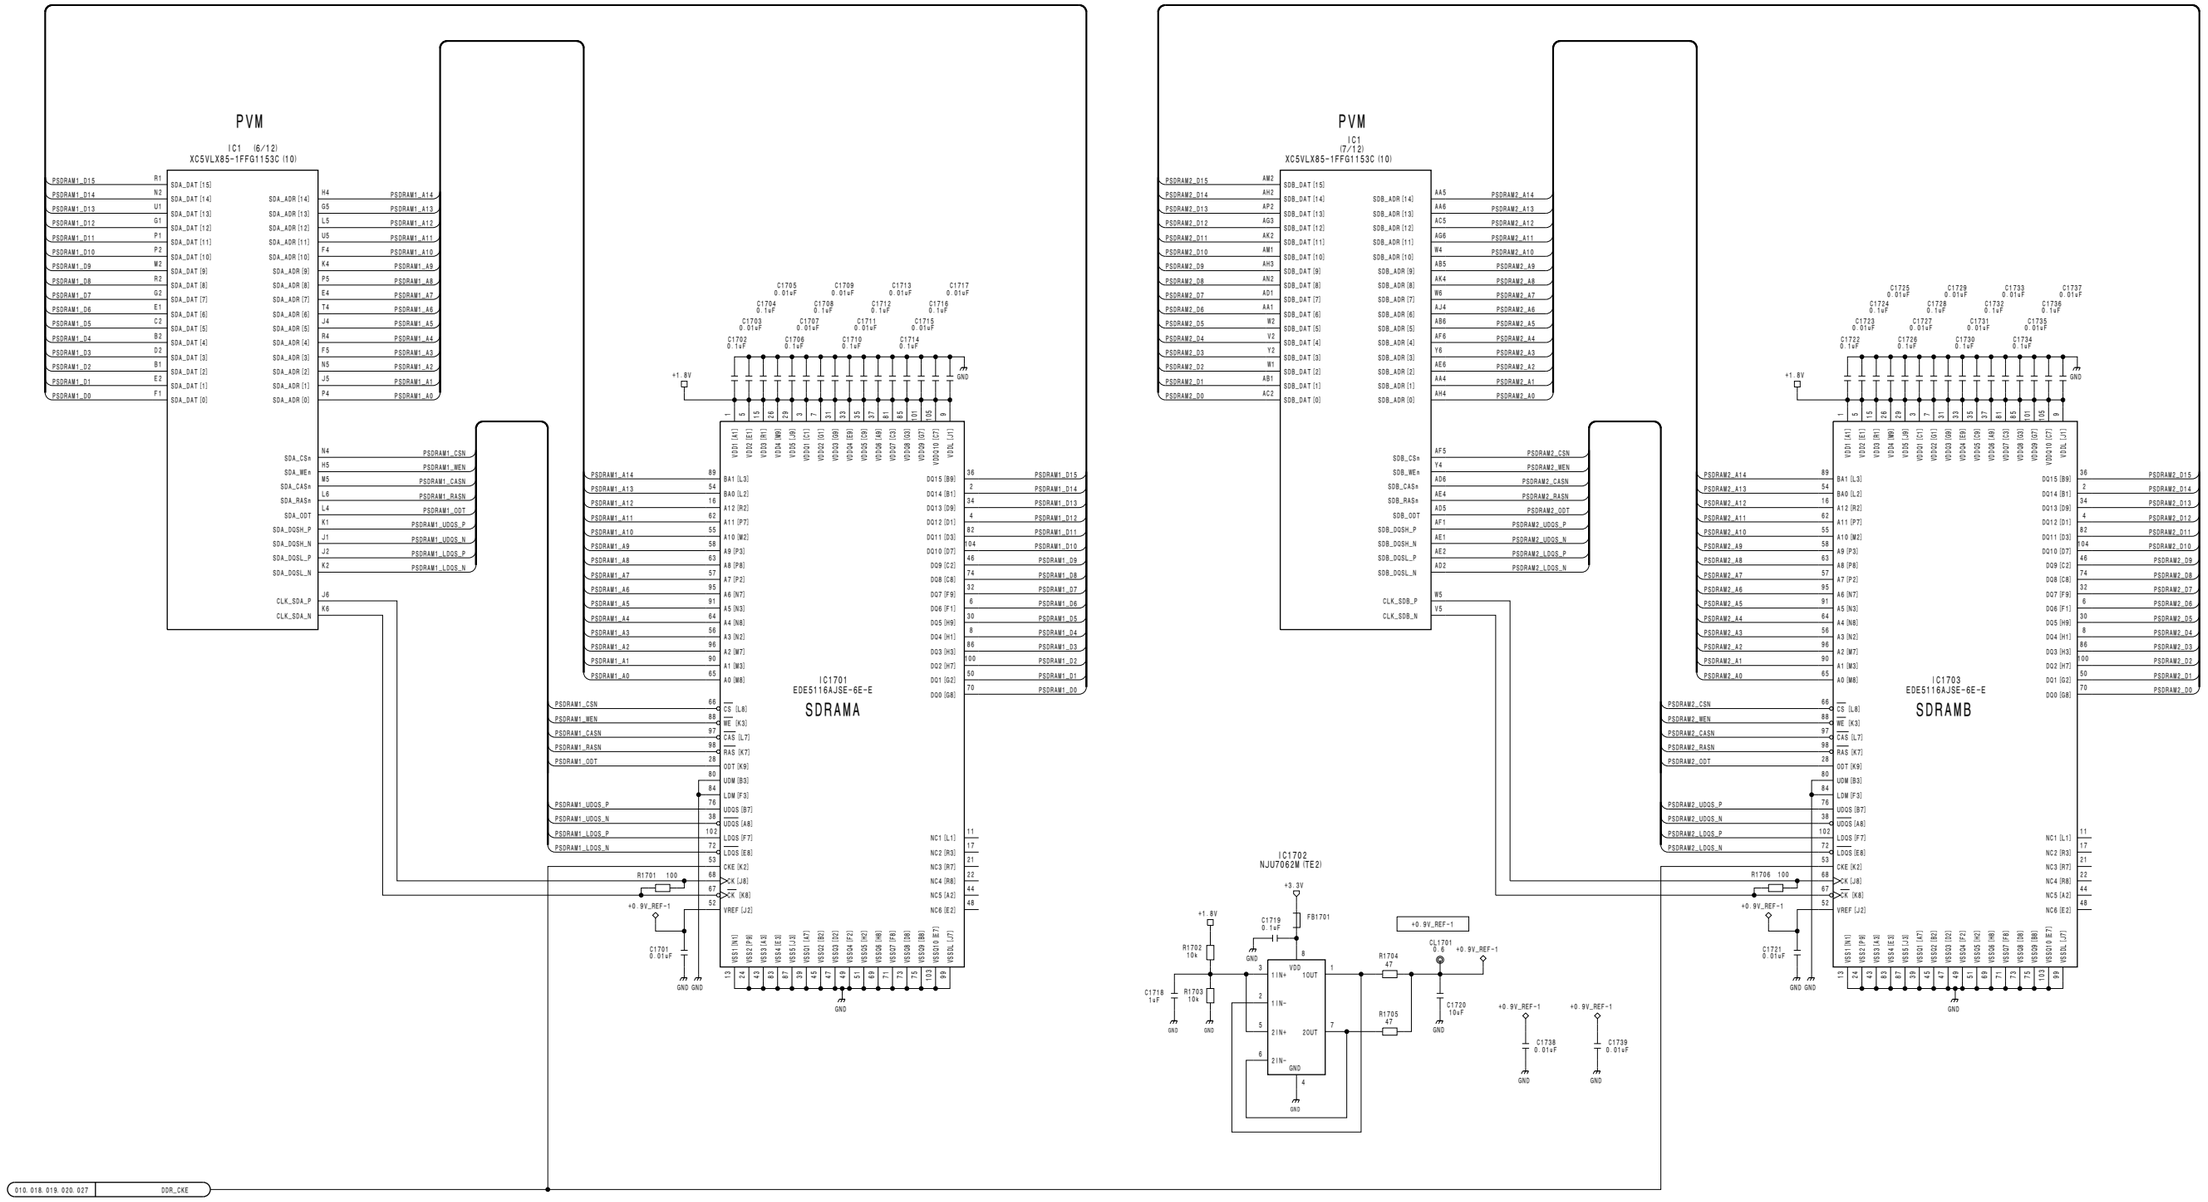


DME Board
DVP-49 (17/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_17

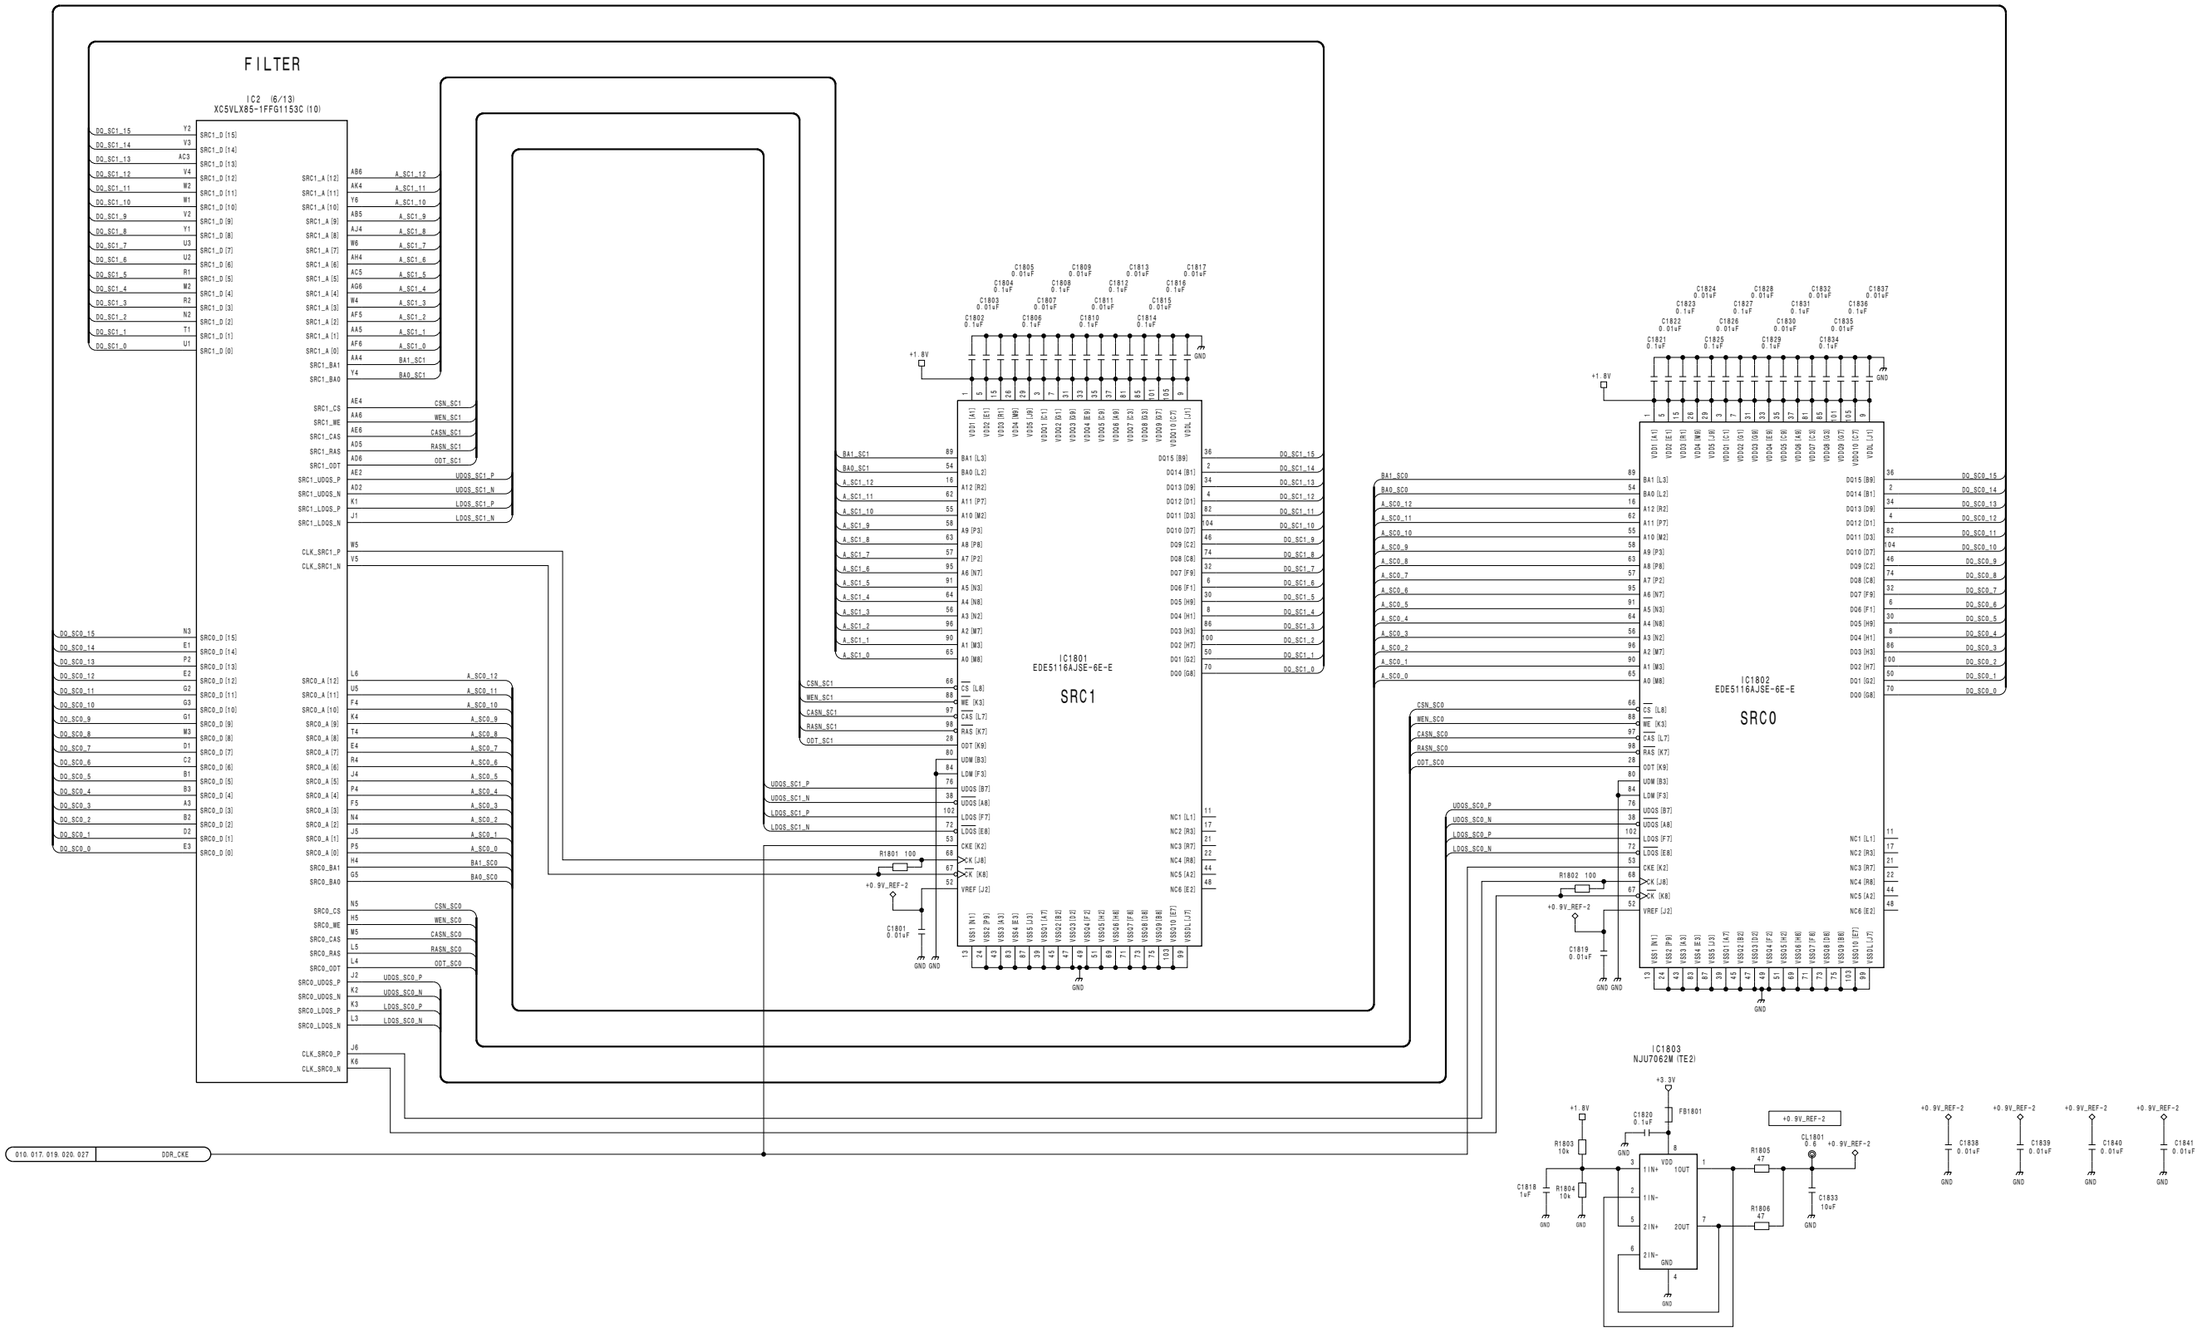


DME Board
DVP-49 (18/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_18

DVP-49 (19/31)
SUFFIX: -12

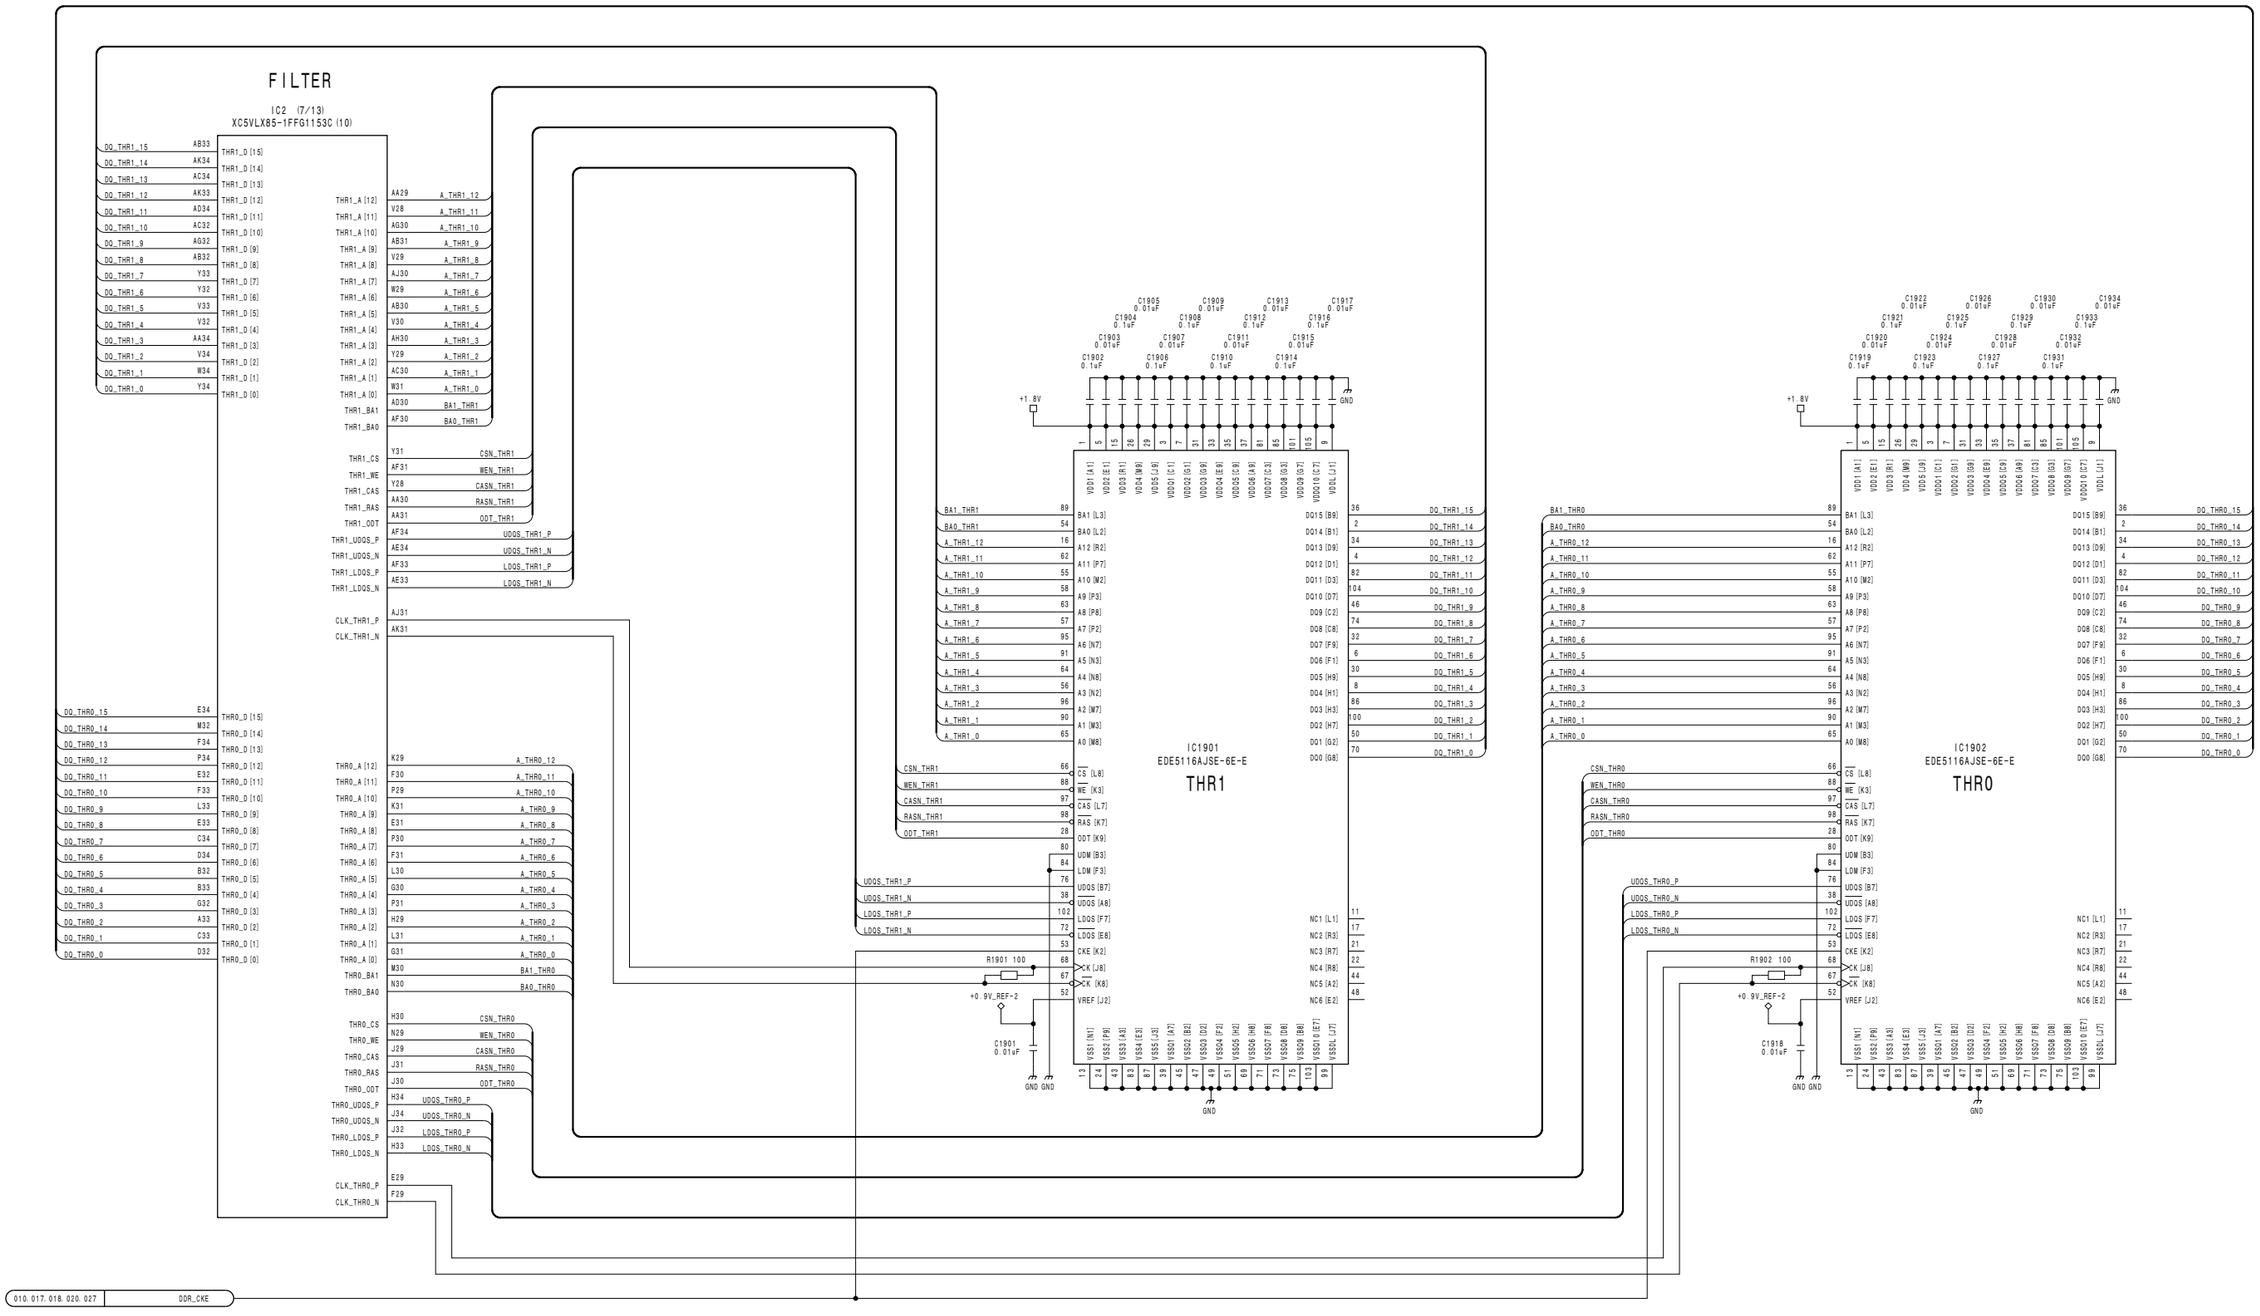


DME Board
DVP-49 (19/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_19


DVP-49 (20/31)
SUFFIX: -12

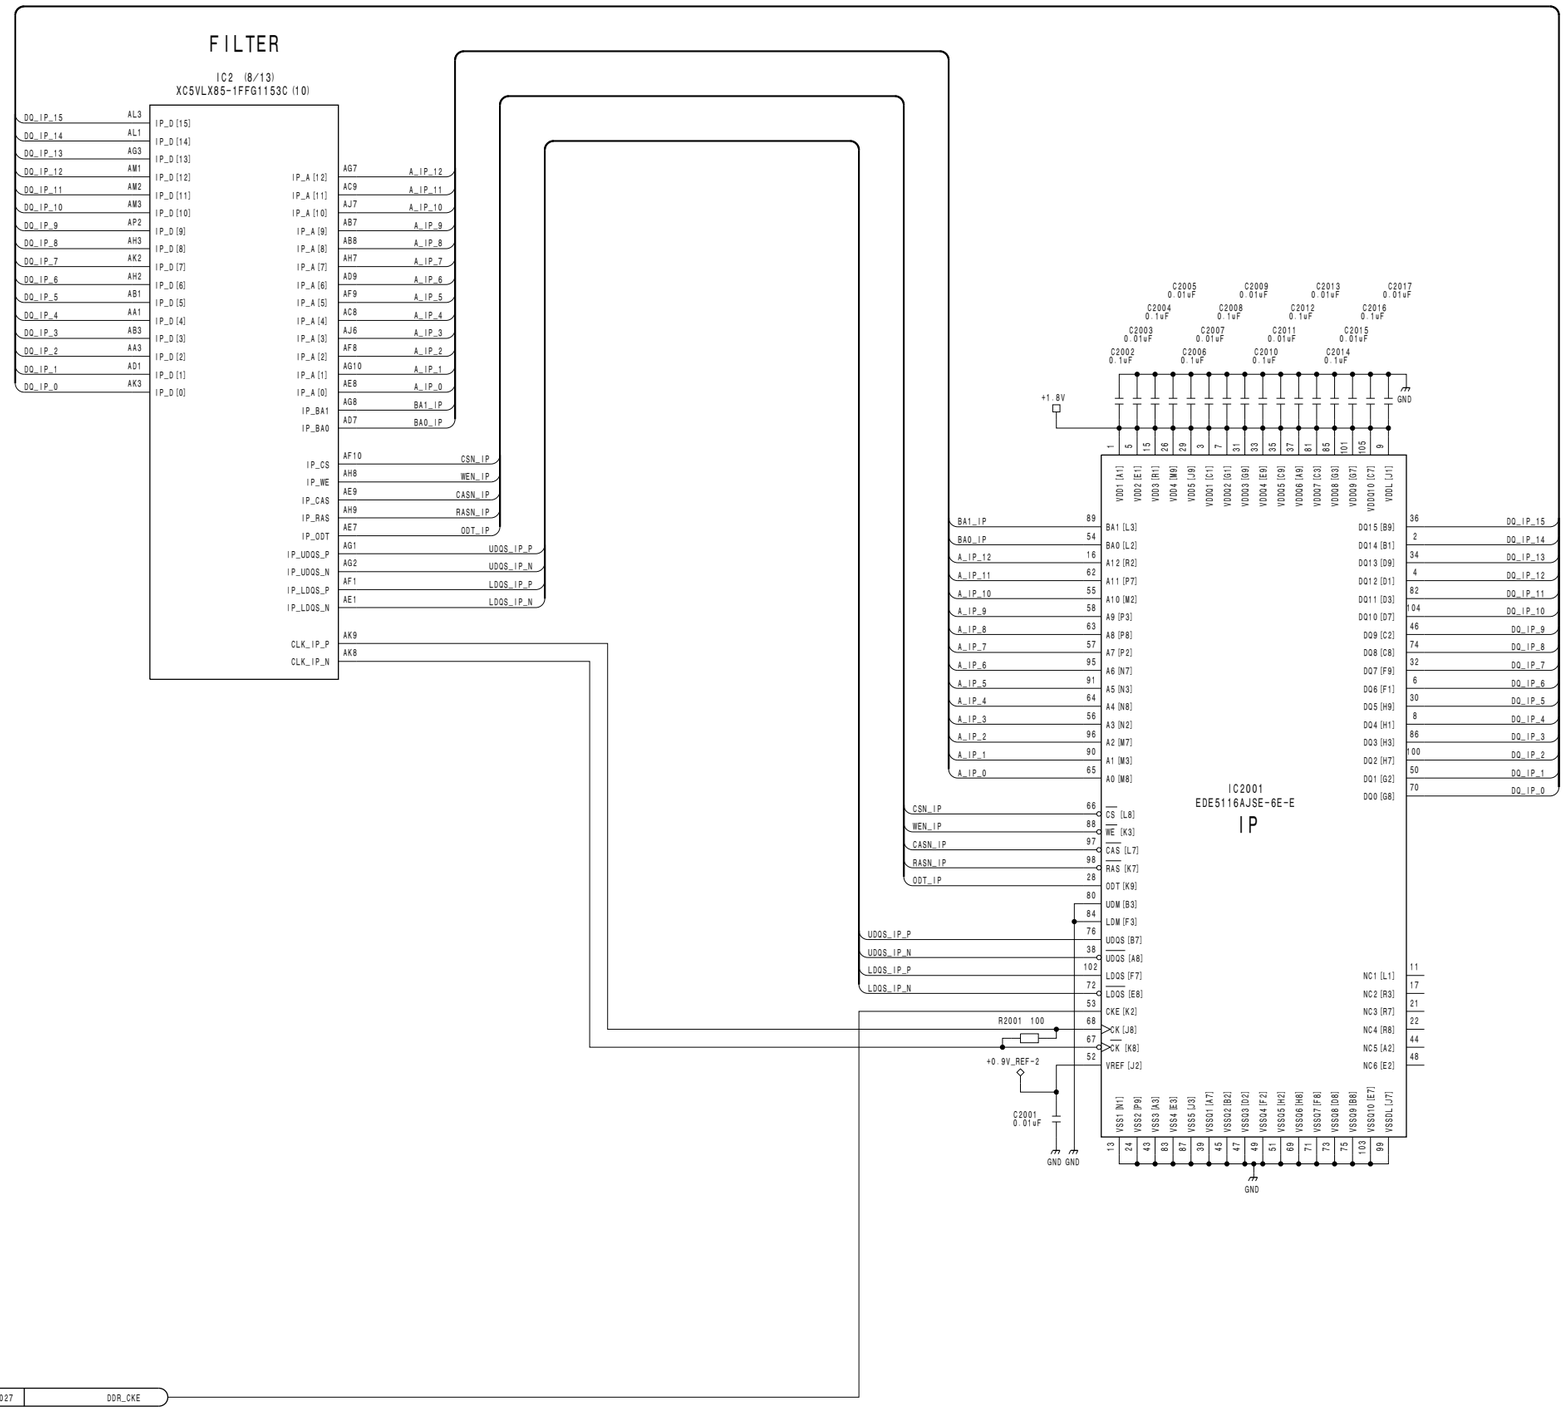

DME Board
DVP-49 (20/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_20

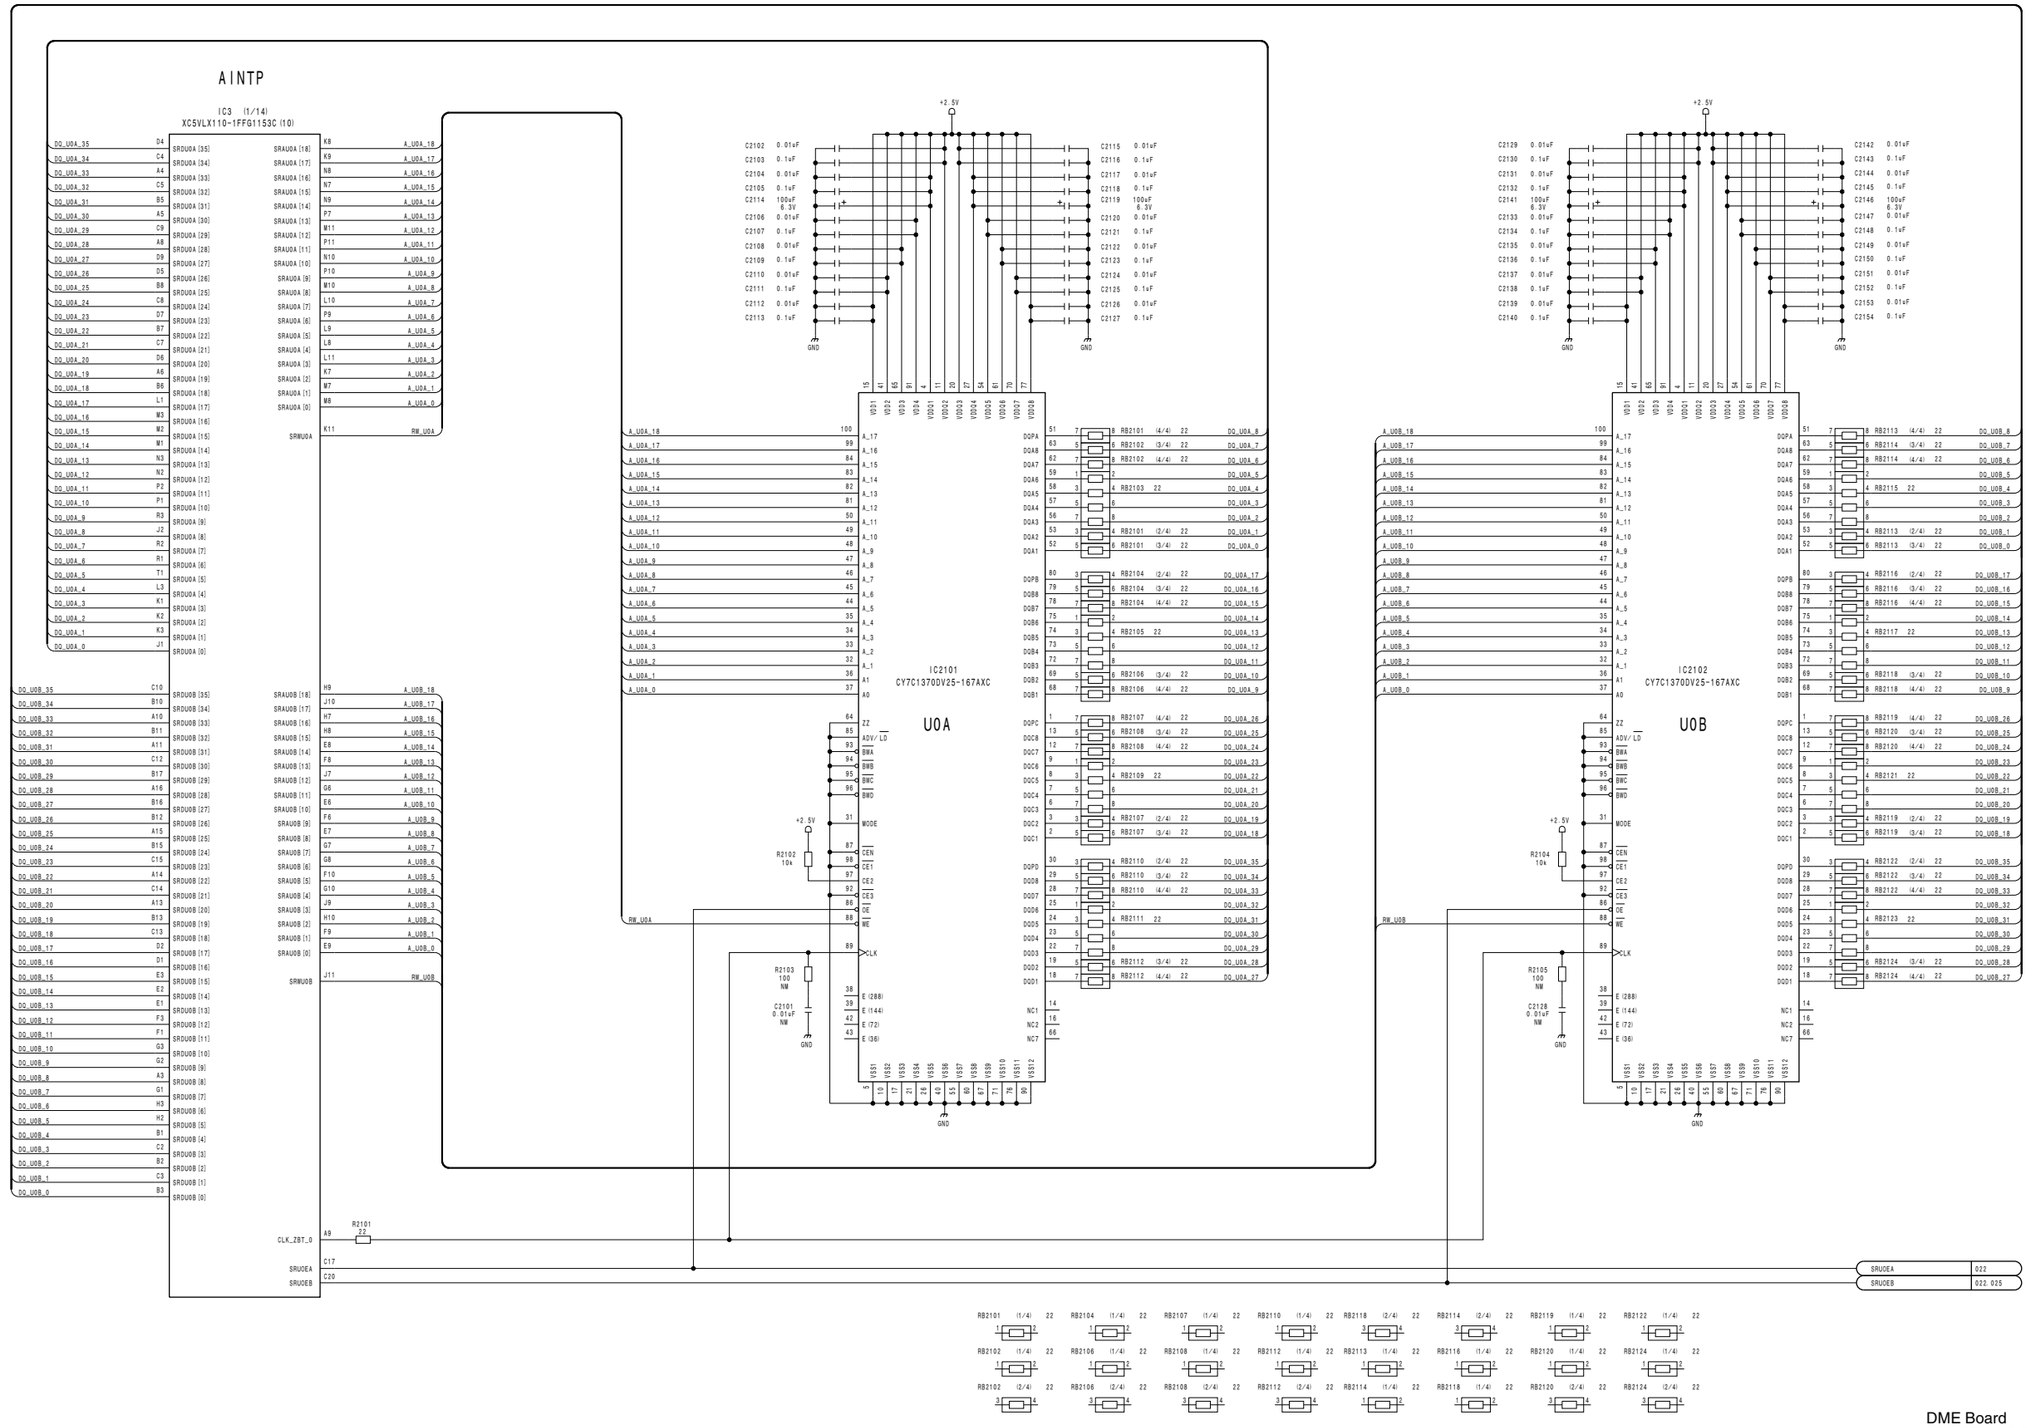


DME Board
DVP-49 (21/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_21

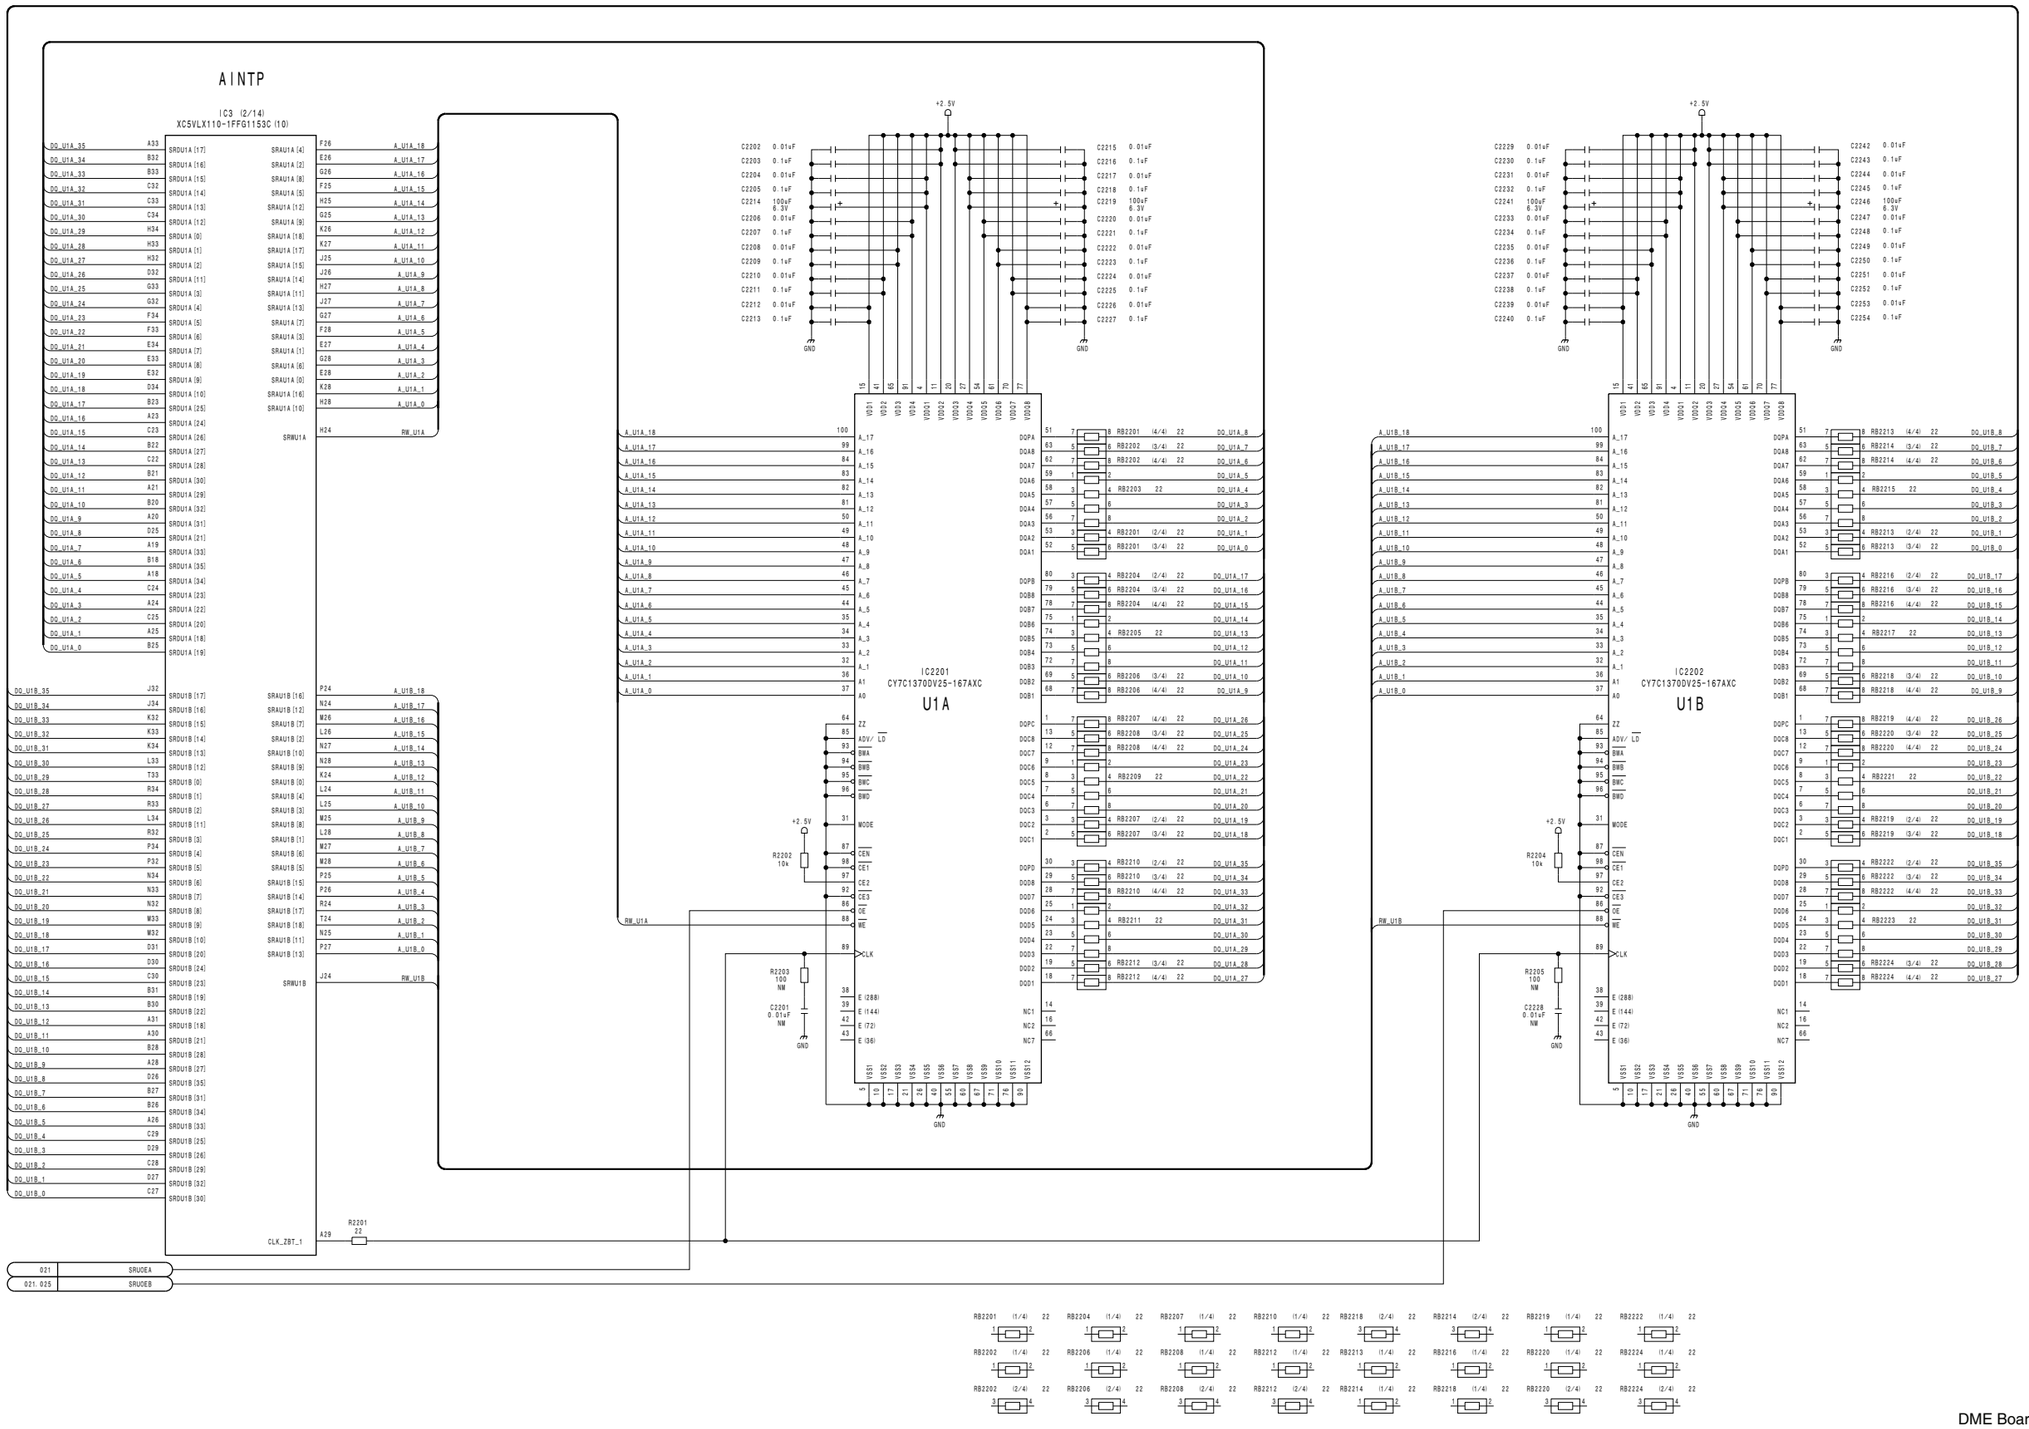


DME Board
DVP-49 (22/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_22

DVP-49 (23/31) **SUFFIX: -12**

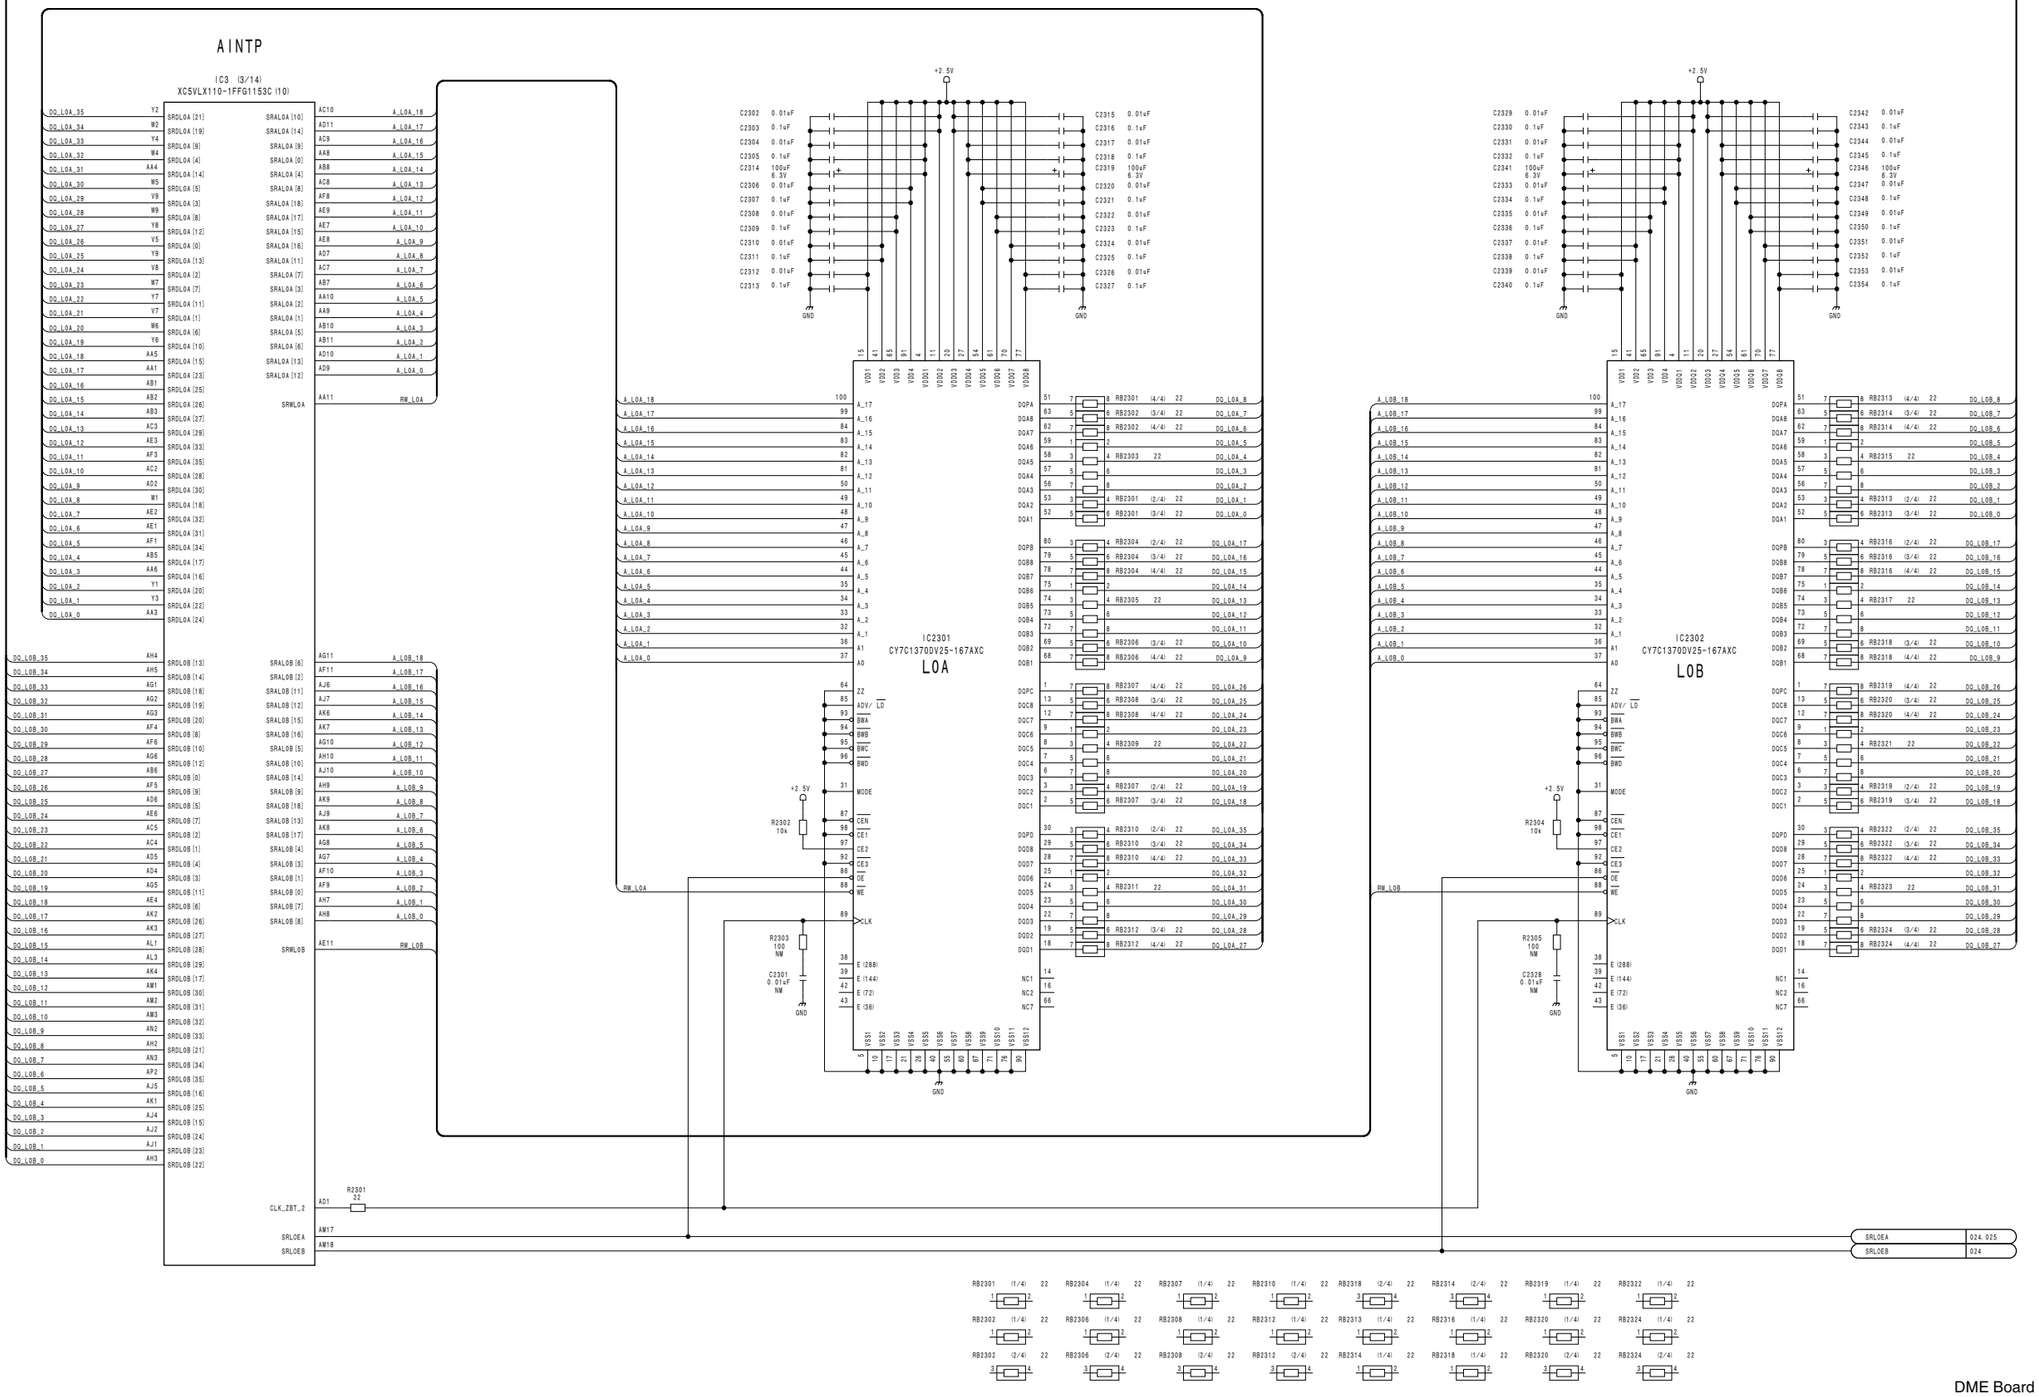


DME Board
DVP-49 (23/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_23

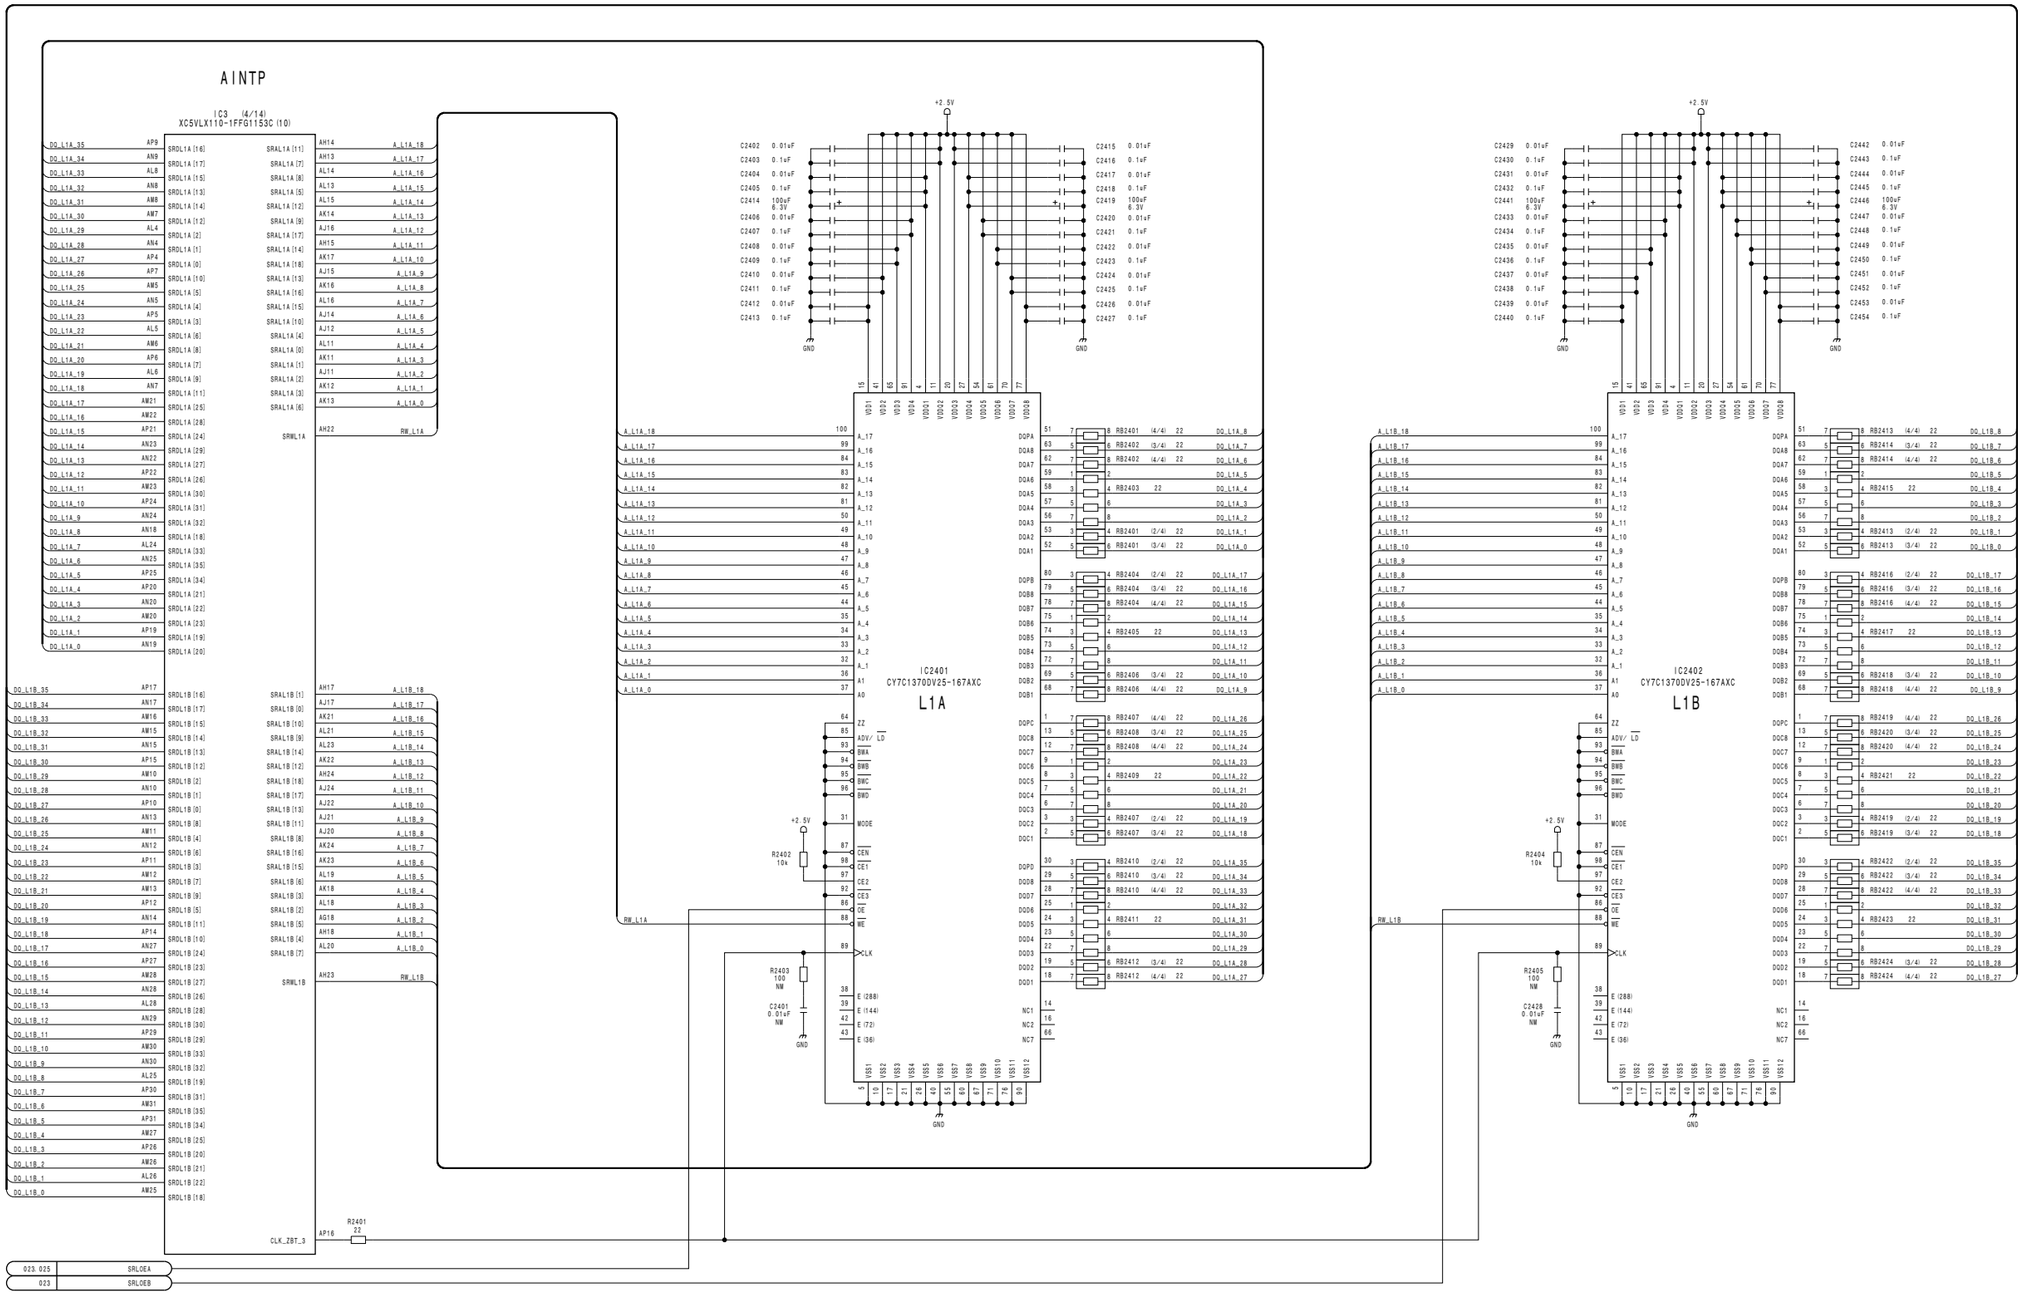


DME Board
DVP-49 (24/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_24


DVP-49 (25/31) **SUFFIX: -12**

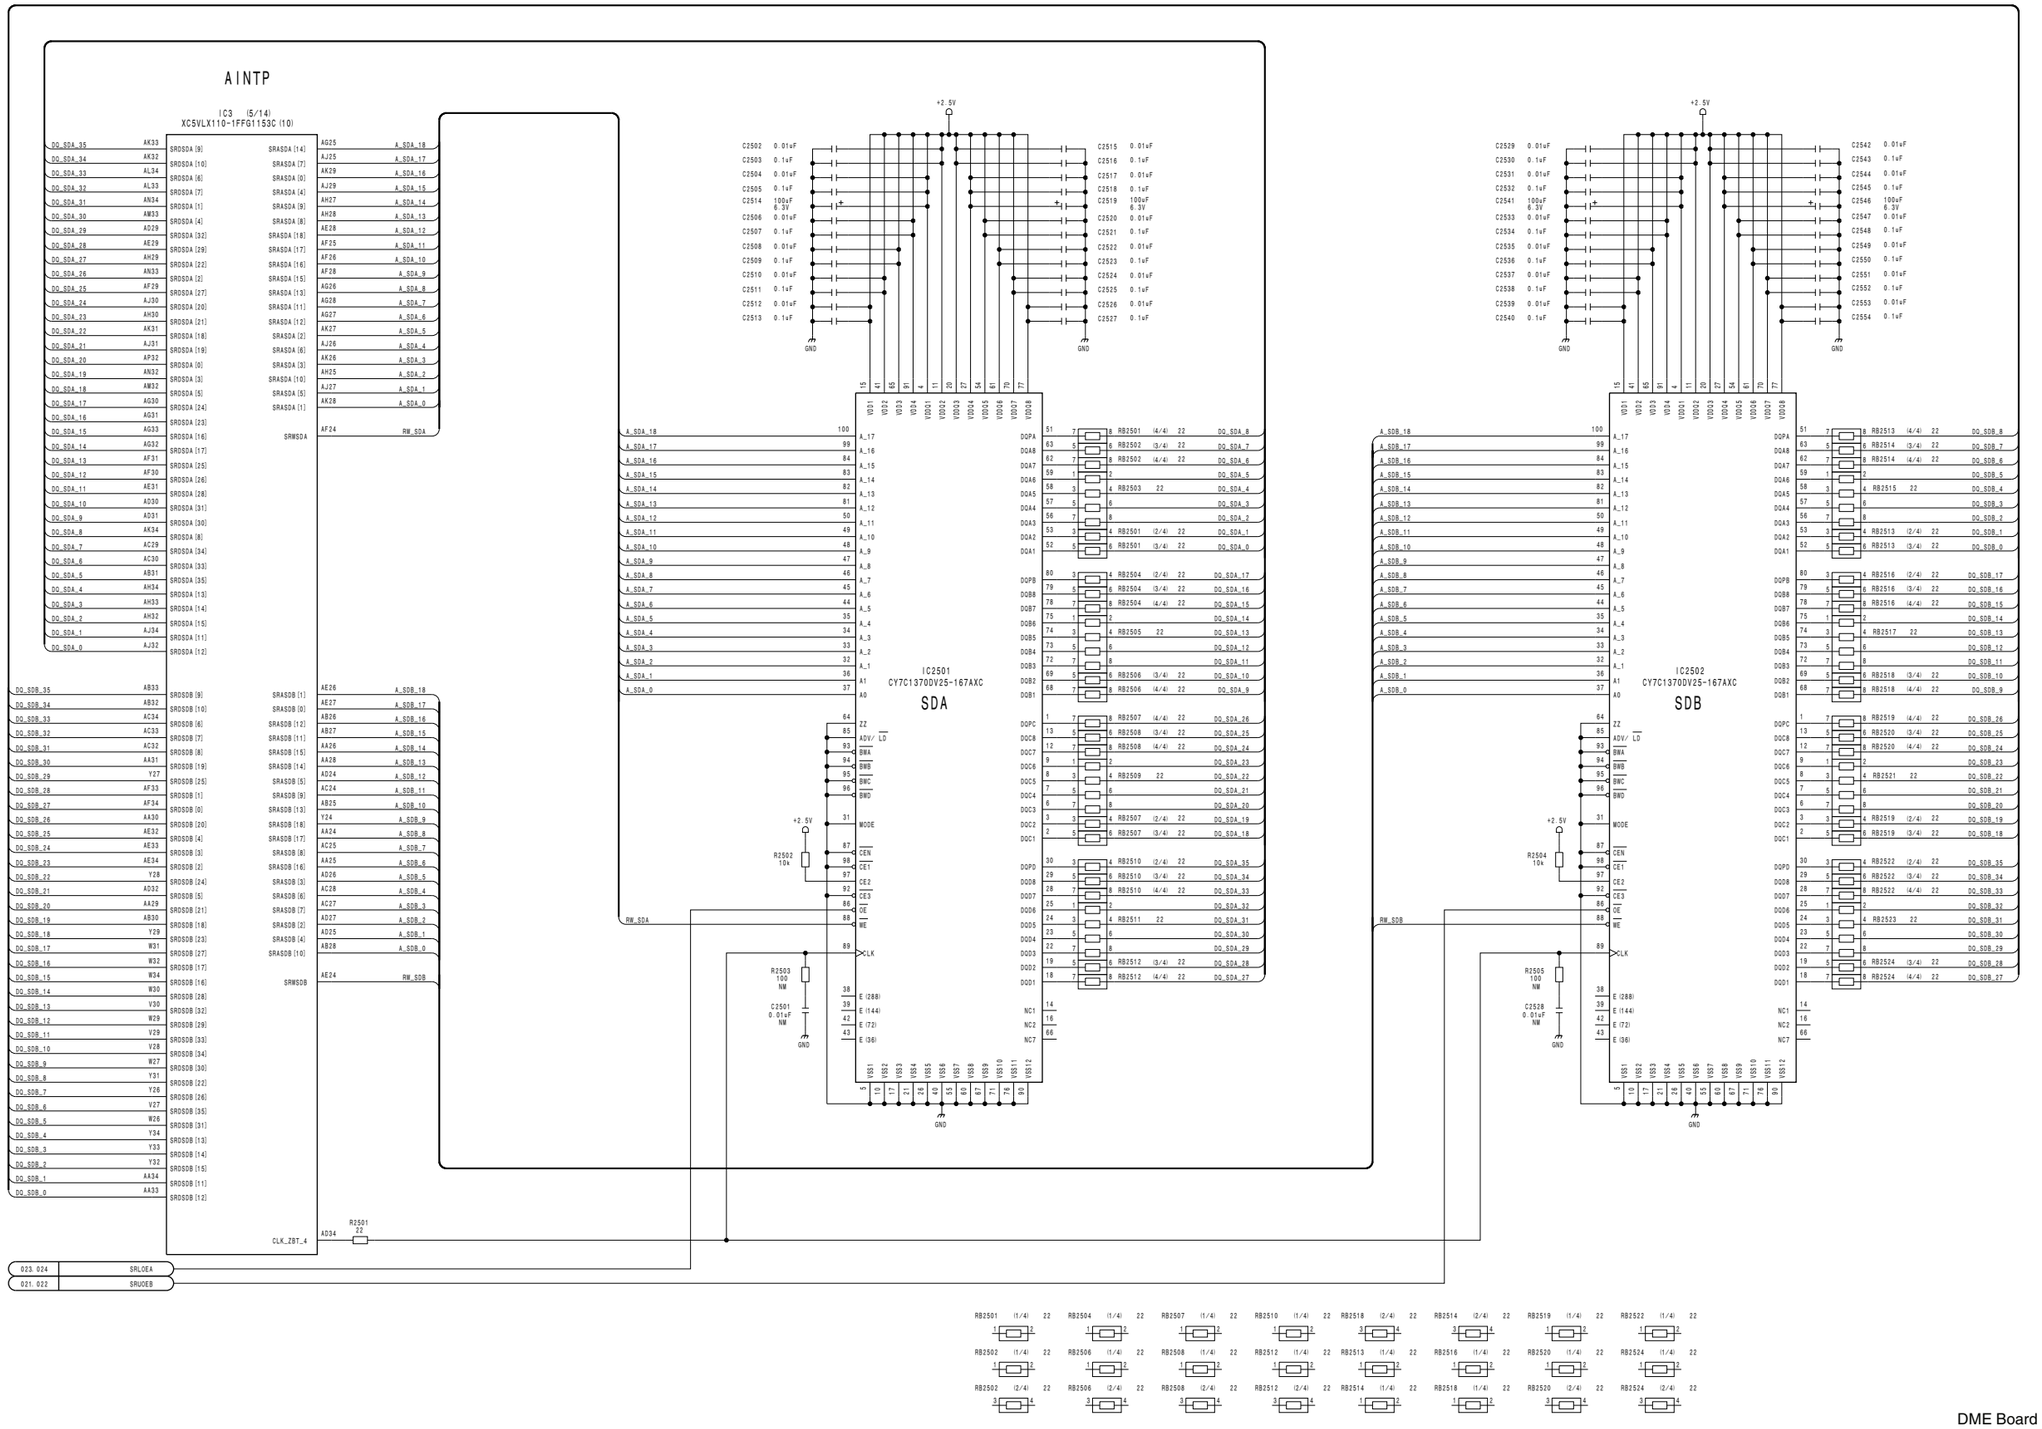

DME Board
DVP-49 (25/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_25


DVP-49 (26/31)
SUFFIX: -12

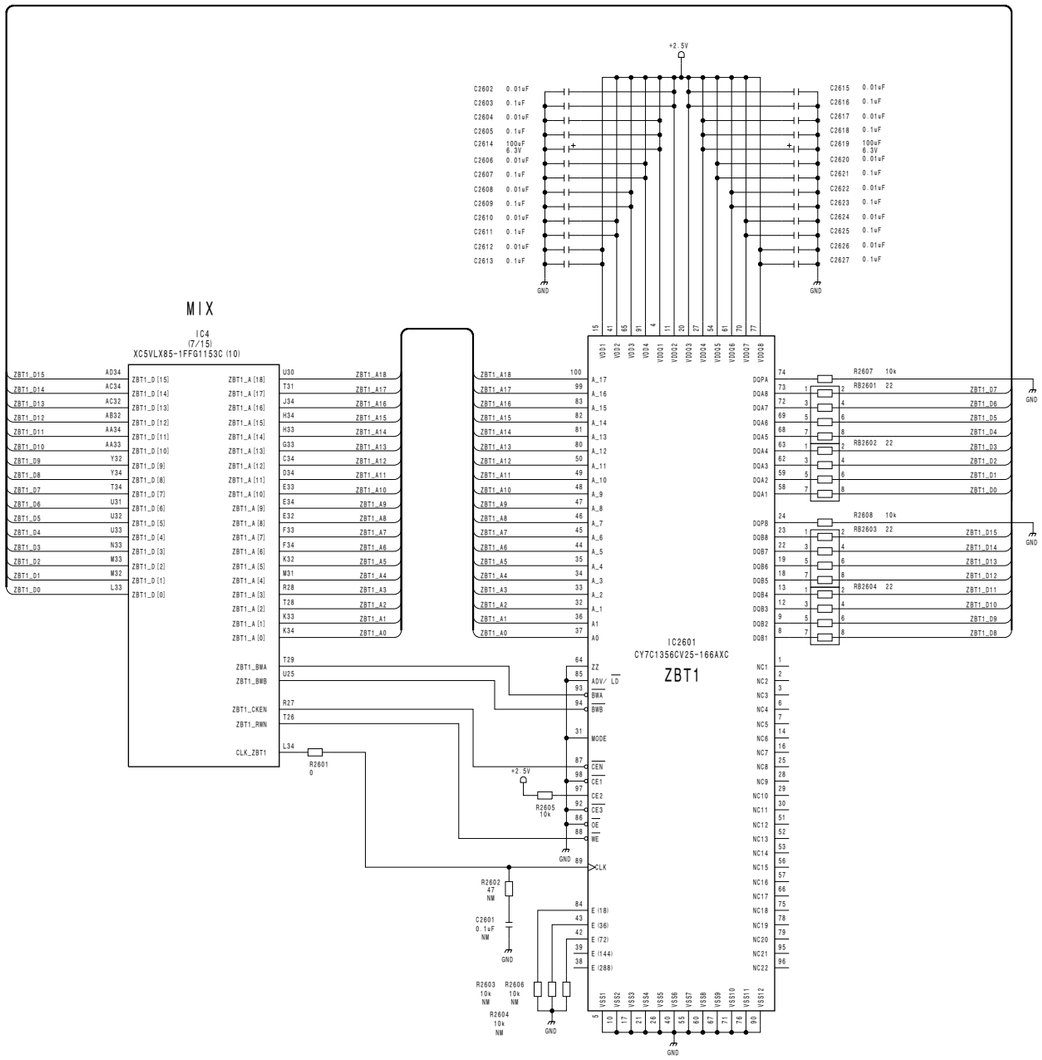

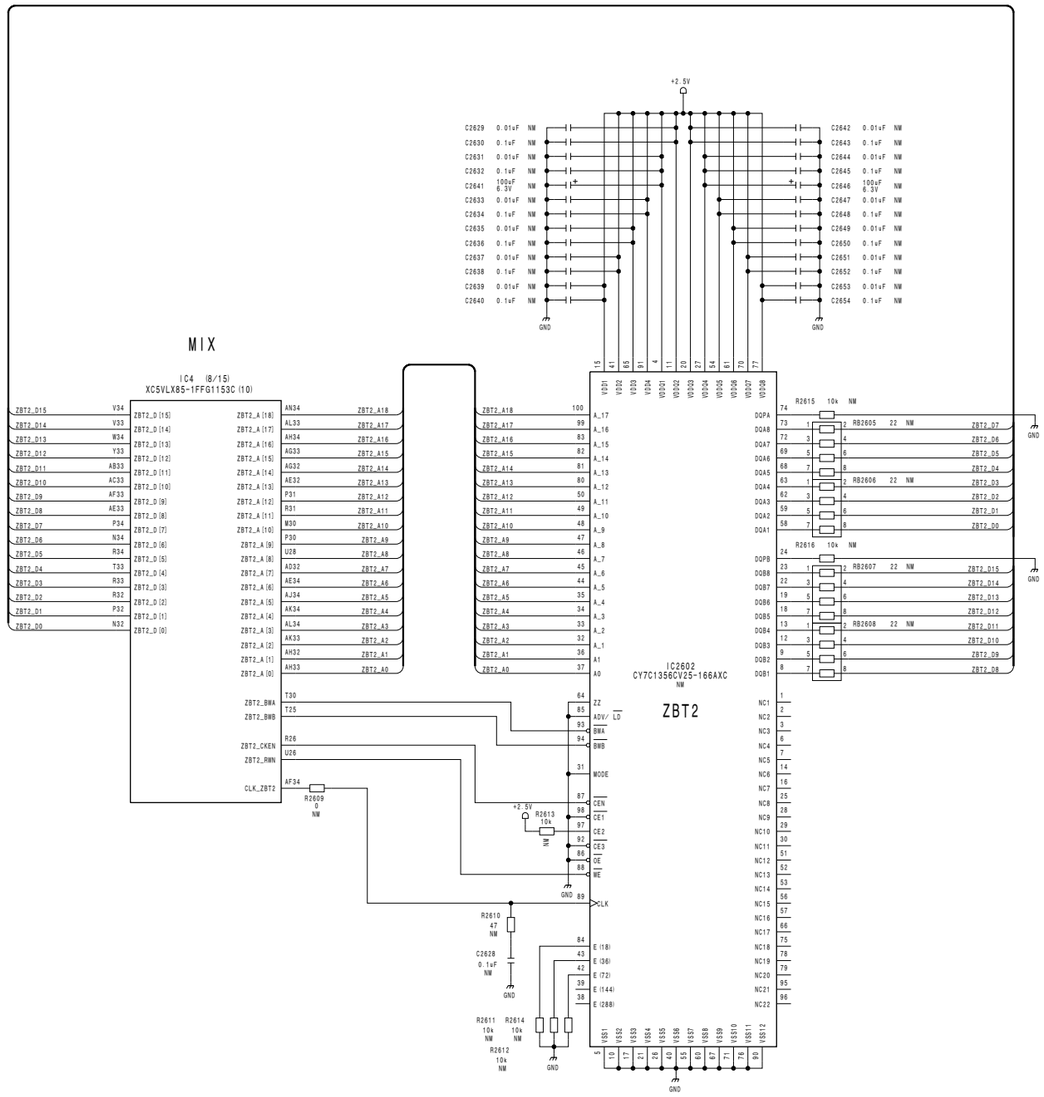


DME Board
DVP-49 (26/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_26

DVP-49 (27/31)
SUFFIX: -12

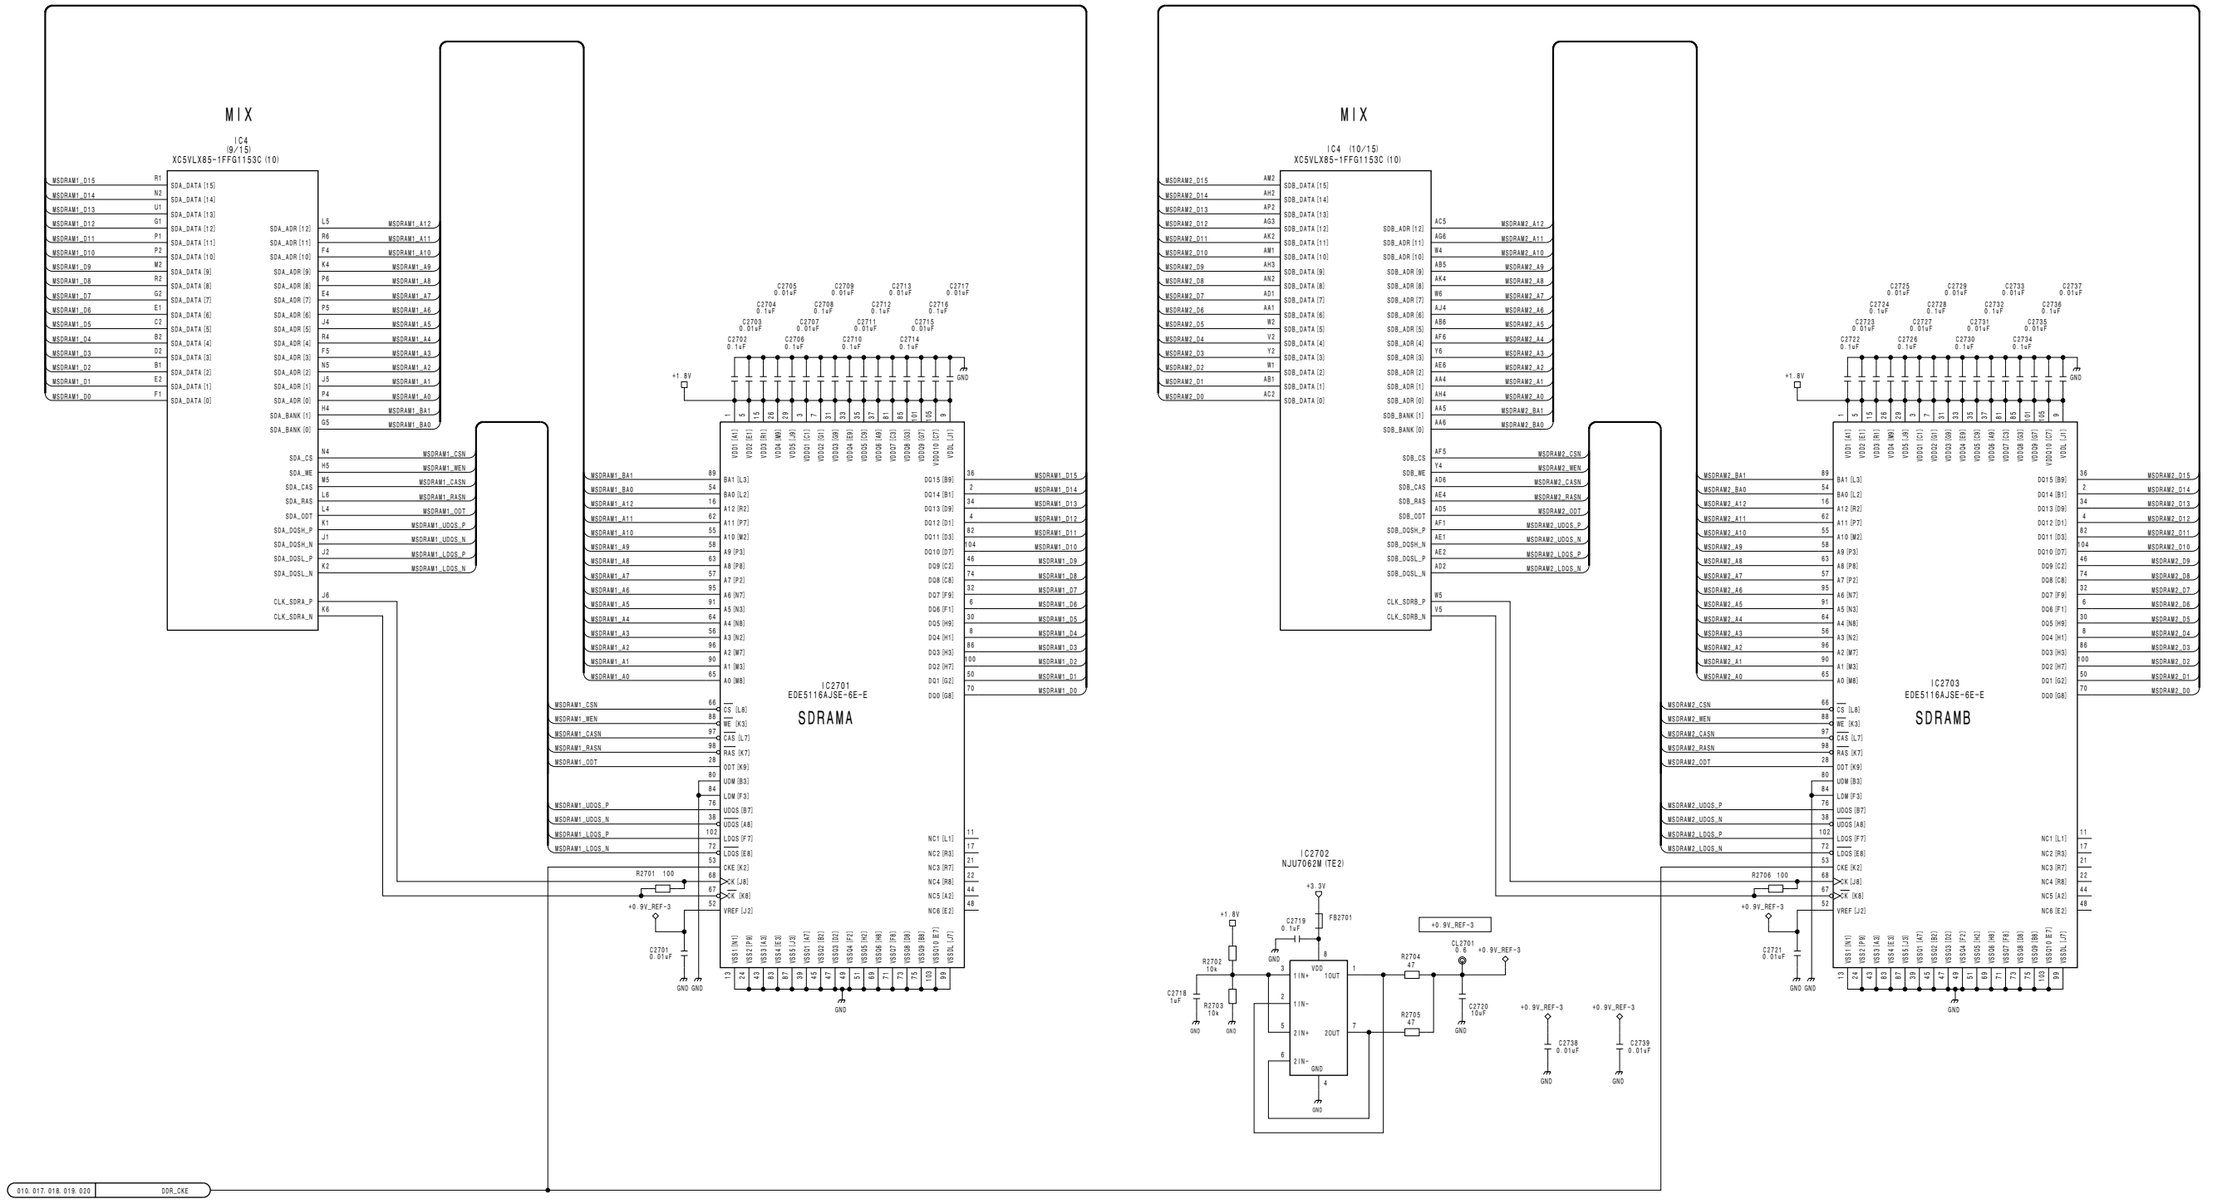



DME Board
DVP-49 (27/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_27

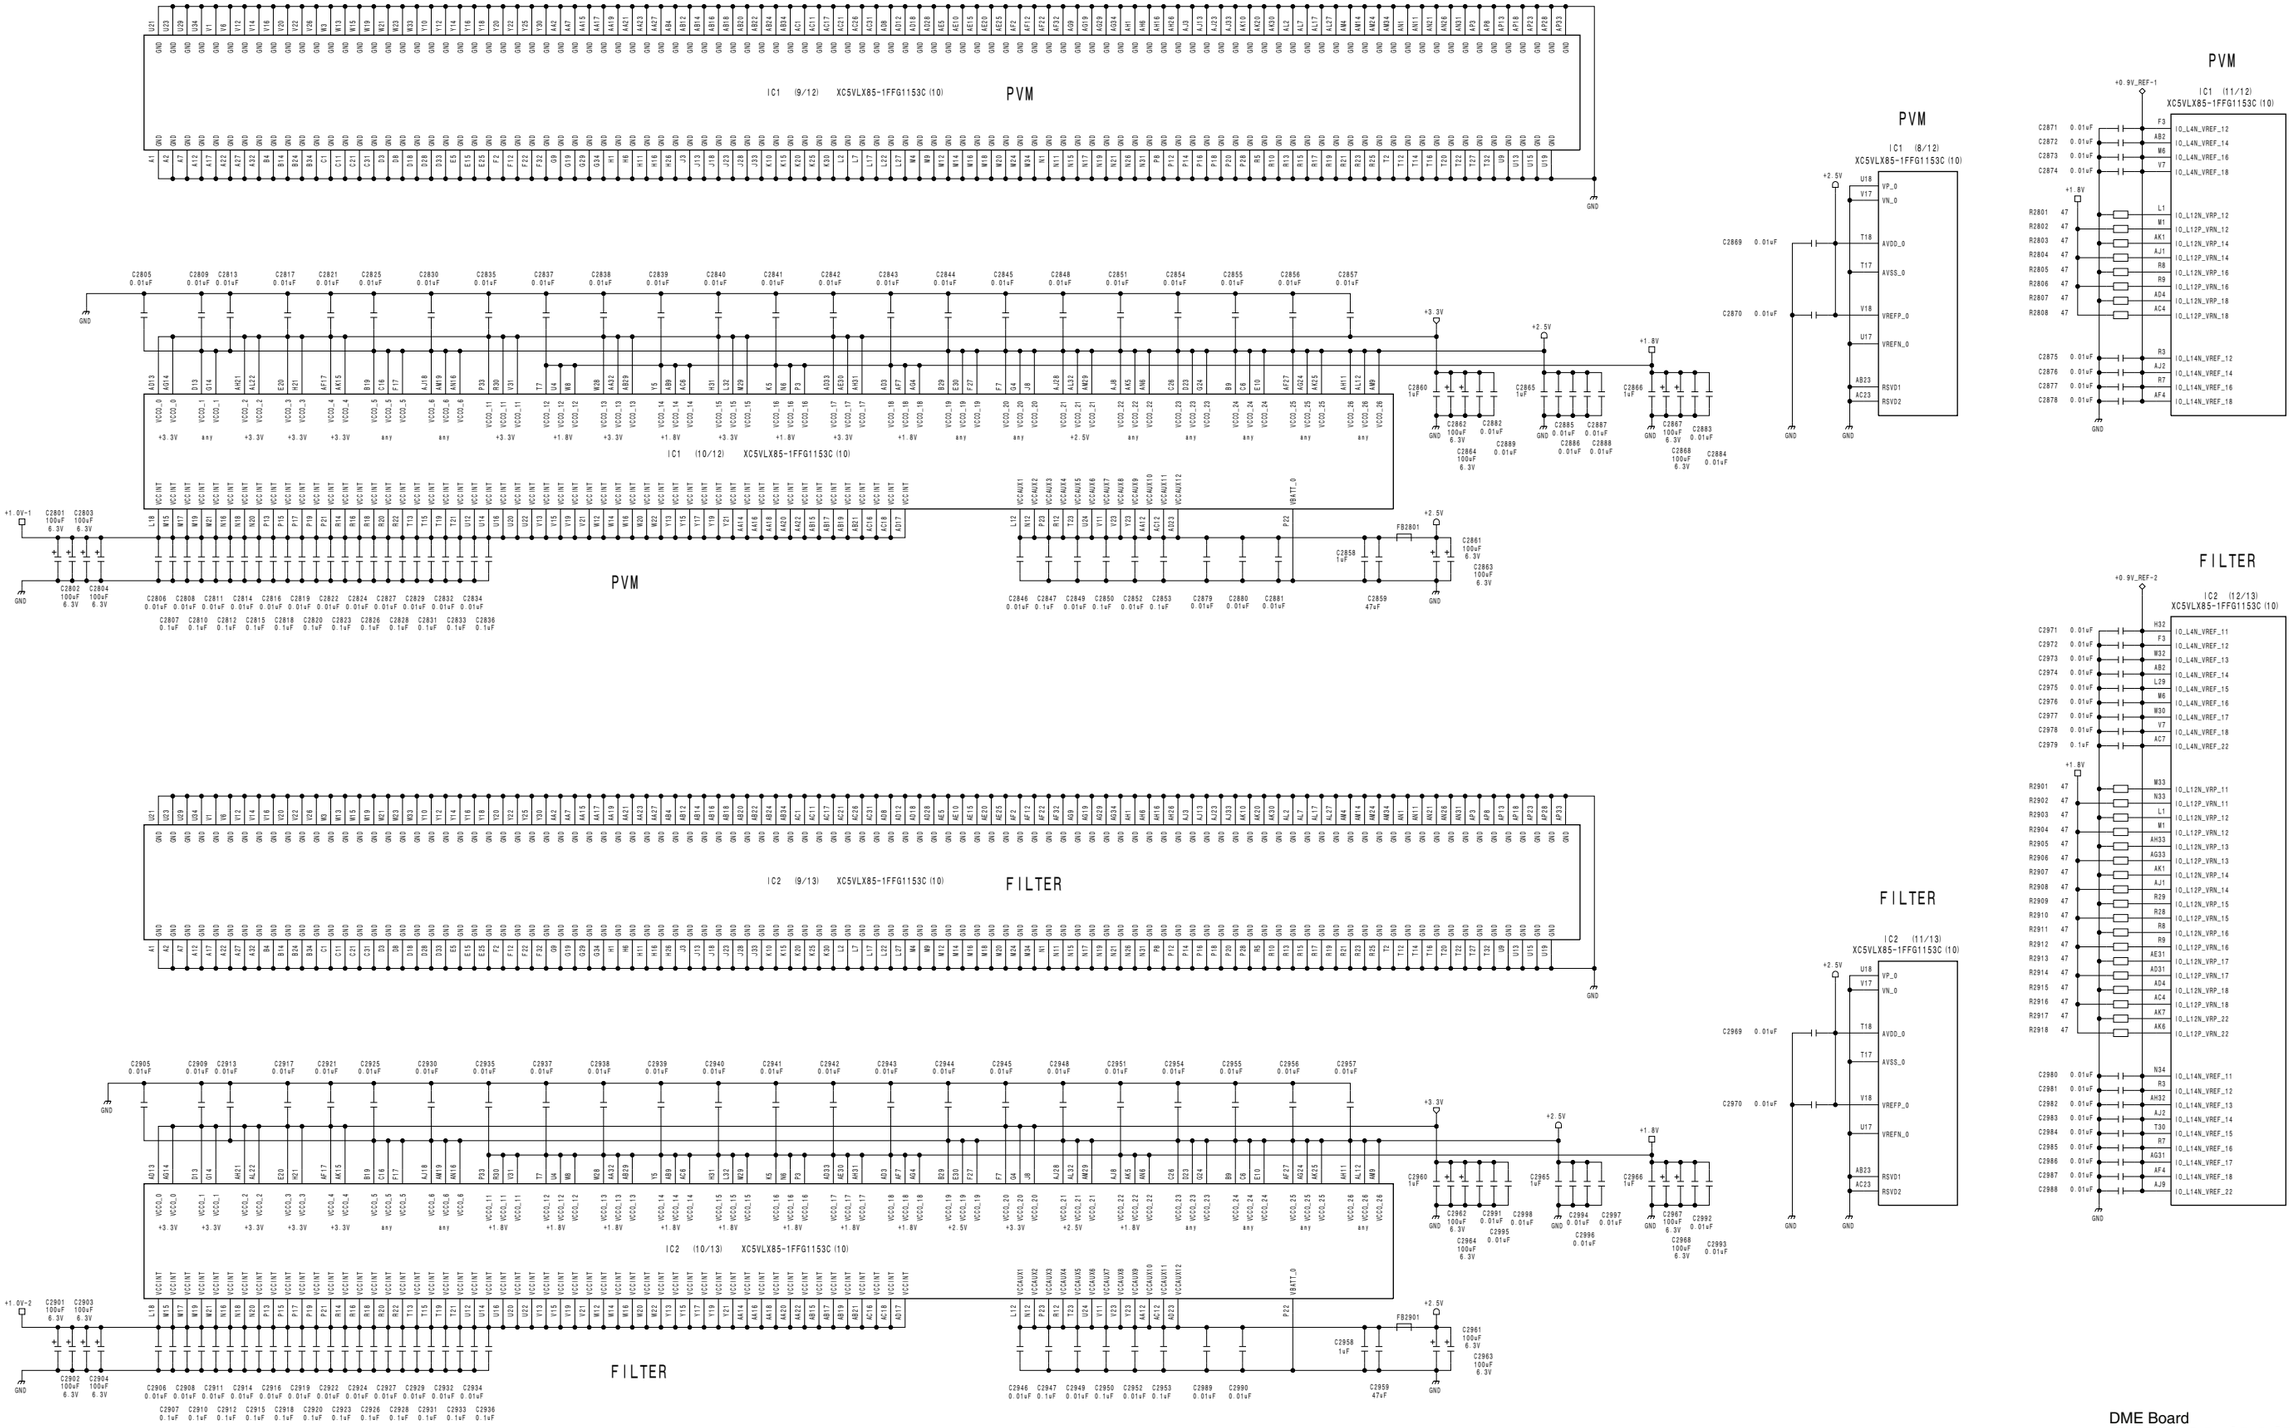



DME Board
DVP-49 (28/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_28


DVP-49 (29/31) **SUFFIX: -12**

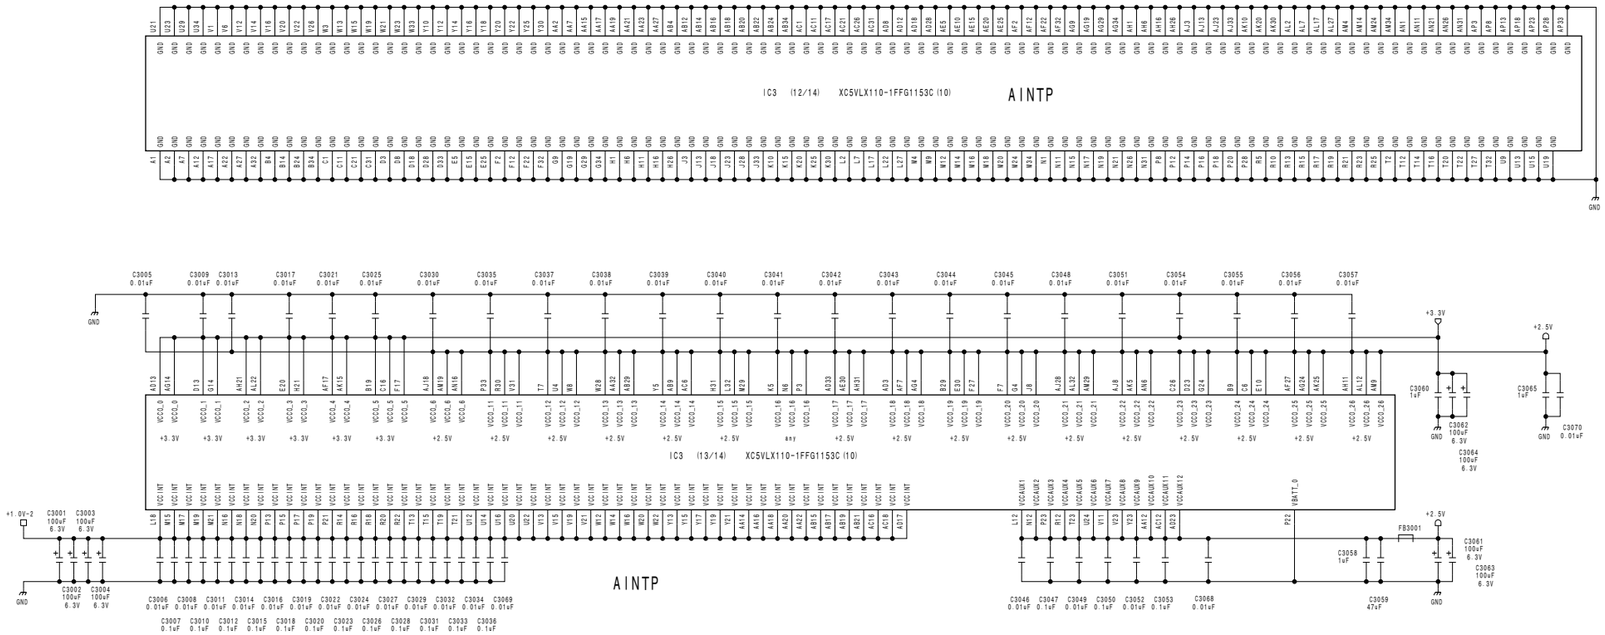



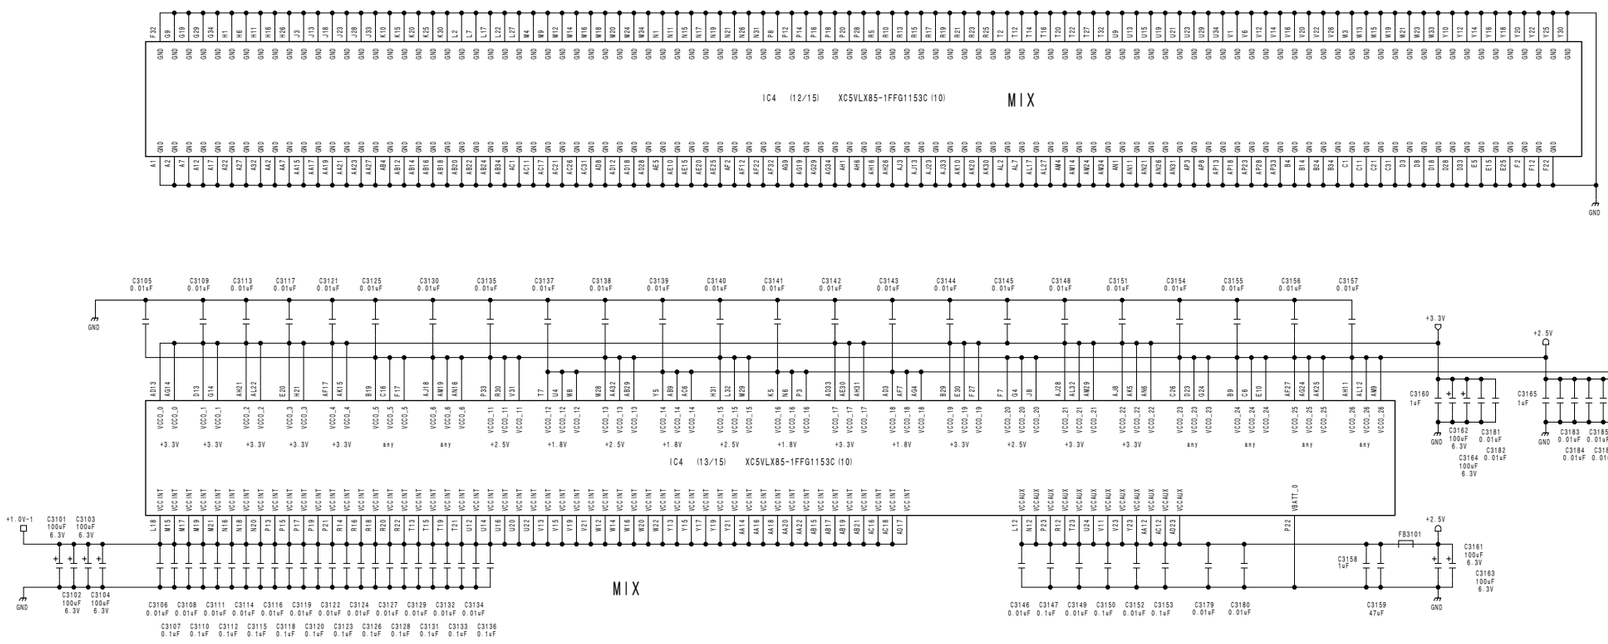


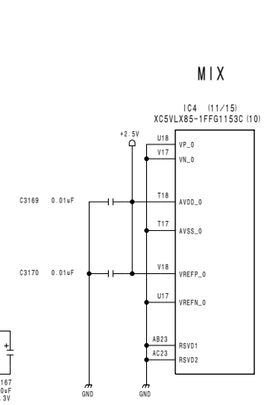

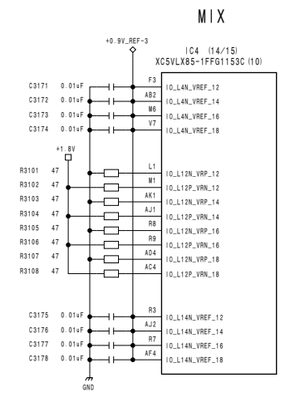


DME Board
DVP-49 (29/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_29


DVP-49 (30/31)
SUFFIX: -12

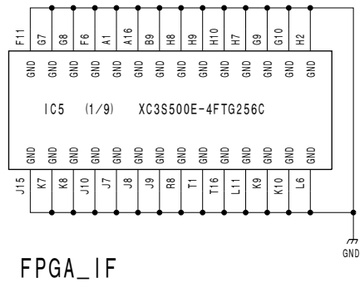


FPGA_IF

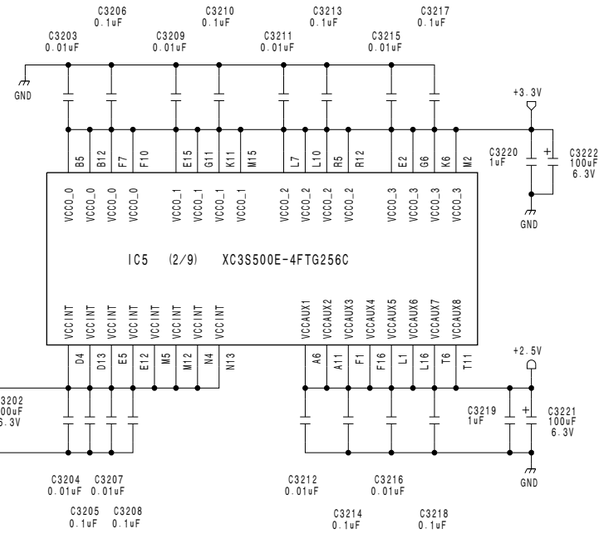


FPGA_IF

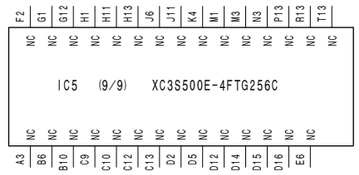

FPGA_IF

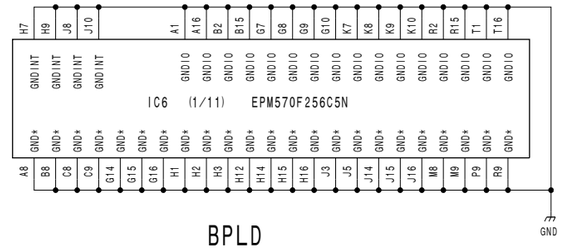

BPLD

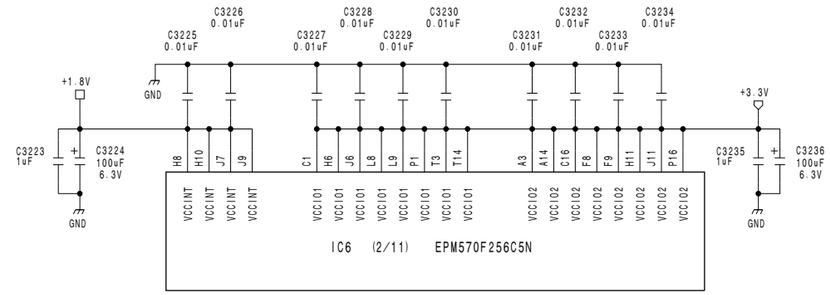


BPLD

DME Board
DVP-49 (30/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_30


4-106


MVS-6000 MM

DVP-49 (31/31)
SUFFIX: -12

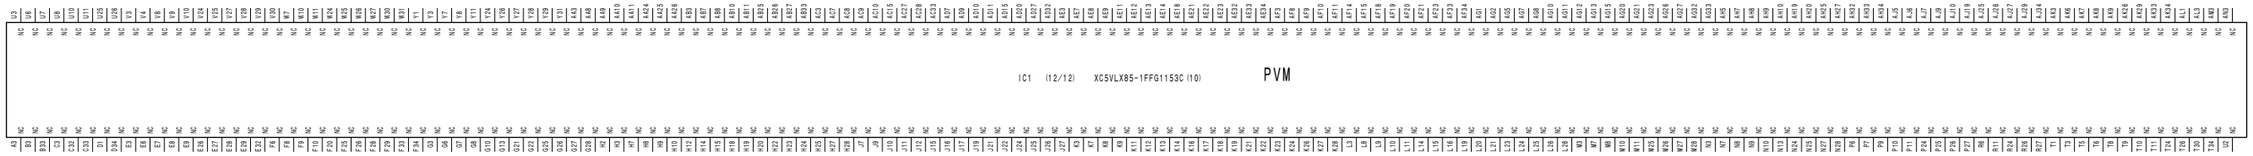



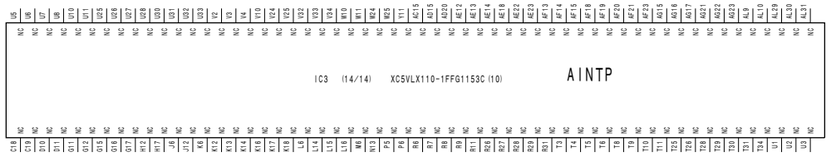

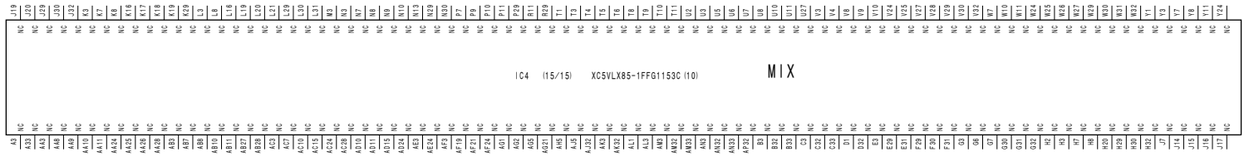

DME Board
DVP-49 (31/31)
BOARD NO. 1-877-213-12
MVS-6000_DVP-49_002_31

FC-109 (1/34)
SUFFIX: -11, -12

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_L	DC_ENBL	GND <BOARD EXT>	<FORMAT>	FUSE+12V	GND
6	SLOT7	SLOT6	(Reserve_BD_EXT)	SLOT5	SLOT4	GND
7	SLOT3	SLOT2	(Reserve_BD_EXT)	SLOT1	SLOT0	GND
8	FC_IP_SEL7	FC_IP_SEL8	GND			GND
9	FC_IP_SEL5	FC_IP_SEL6	GND			GND
10	FC_IP_SEL3	FC_IP_SEL4	GND			GND
11	FC_IP_SEL1	FC_IP_SEL2	GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17	FCVOUT8P	FCVOUT8N	GND	FCVIN8P	FCVIN8N	GND
18	FCVOUT7P	FCVOUT7N	GND	FCVIN7P	FCVIN7N	GND
19	FCVOUT6P	FCVOUT6N	GND	FCVIN6P	FCVIN6N	GND
20	FCVOUT5P	FCVOUT5N	GND	FCVIN5P	FCVIN5N	GND
21	FCVOUT4P	FCVOUT4N	GND	FCVIN4P	FCVIN4N	GND
22	FCVOUT3P	FCVOUT3N	GND	FCVIN3P	FCVIN3N	GND
23	FCVOUT2P	FCVOUT2N	GND	FCVIN2P	FCVIN2N	GND
24	FCVOUT1P	FCVOUT1N	GND	FCVIN1P	FCVIN1N	GND
25			GND			GND

CNW1


	a	b	c	d	e	FG
1	FC_HFCKAP	FC_HFCKAN	GND	FC_HFCKBP	FC_HFCKBN	GND
2	FC_CKXAP	FC_CKXAN	GND	FC_CKXBP	FC_CKXBN	GND
3	FC_VDAP	FC_VDAN	GND	FC_VDBP	FC_VDBN	GND
4	FC_HDAP	FC_HDAN	GND	FC_HDBP	FC_HDBN	GND
5	FC_FLOEAP	FC_FLOEAN	GND	FC_FLOEBP	FC_FLOEBN	GND
6			GND			GND
7			GND			GND
8			GND			GND
9	GND	GND	GND			GND
10	GND	REF_IN_FC	GND			GND
11	GND	GND	GND			GND

CNZ1

	a	b	c	d	e	FG
1			GND			GND
2			GND			GND
3	PBUSOUT01	PBUSOUT02	GND	PBUSOUT03	PBUSOUT04	GND
4	PBUSOUT05	PBUSOUT06	GND	PBUSOUT07	PBUSOUT08	GND
5	PBUSOUT09	PBUSOUT10	GND	PBUSOUT11	PBUSOUT12	GND
6	PBUSOUT13	PBUSOUT14	GND	PBUSOUT15	PBUSOUT16	GND
7	PBUSOUT17	PBUSOUT18	GND	PBUSOUT19	PBUSOUT20	GND
8	PBUSOUT21	PBUSOUT22	GND	PBUSOUT23	PBUSOUT24	GND
9	PBUSOUT25	PBUSOUT26	GND	PBUSOUT27	PBUSOUT28	GND
10	PBUSOUT29	PBUSOUT30	GND	PBUSOUT31	PBUSOUT32	GND
11	PBUSOUT33	PBUSOUT34	GND	PBUSOUT35	PBUSOUT36	GND
12						GND
13						GND
14						GND
15	PBUSOUT37	PBUSOUT38	GND	PBUSOUT39	PBUSOUT40	GND
16	PBUSOUT41	PBUSOUT42	GND	PBUSOUT43	PBUSOUT44	GND
17	PBUSOUT45	PBUSOUT46	GND	(PBUSOUT47)	(PBUSOUT48)	GND
18	(PBUSOUT49)	(PBUSOUT50)	GND	(PBUSOUT51)	(PBUSOUT52)	GND
19	CPU_CKP	CPU_CKN	GND	(PBUSOUT55)	(PBUSOUT56)	GND
20	PBUSOUT57	PBUSOUT58	GND	PBUSOUT59	PBUSOUT60	GND
21			GND			GND
22			GND			GND
23			GND	HFCKP	HFCKN	GND
24	HDP	HDN	GND	CKXP	CKXN	GND
25	FLOEP	FLOEN	GND	VDP	VDN	GND

Format Converter Board
FC-109 (1/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_1

FC-109 (2/34)
SUFFIX: -11, -12

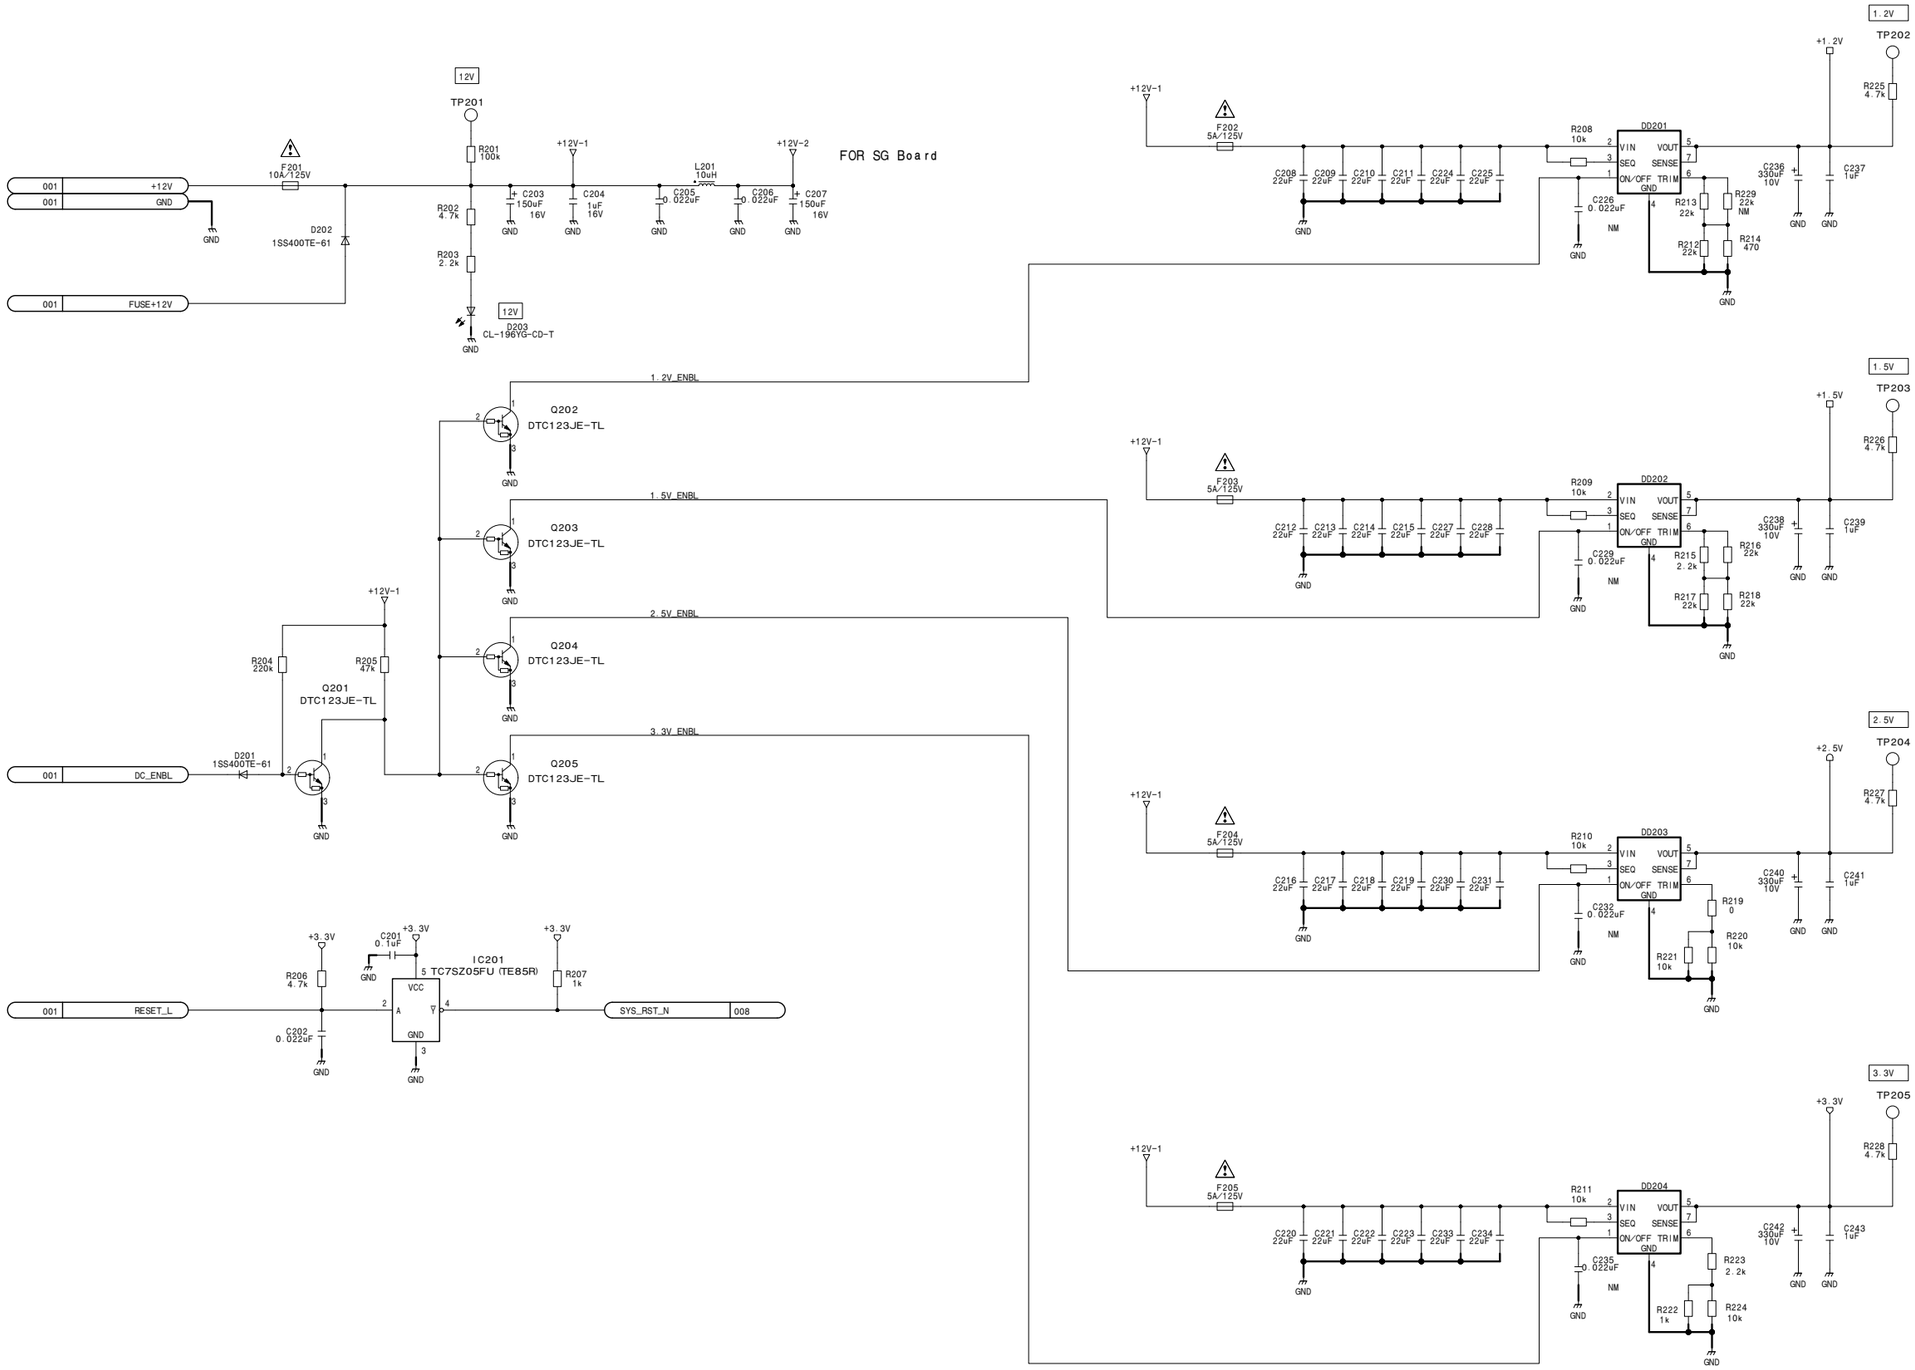

Format Converter Board
FC-109 (2/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_2

FC-109 (3/34)
SUFFIX: -11, -12

Format Converter Board
FC-109 (3/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_3

4-110

MVS-6000 MM

FC-109 (4/34)
SUFFIX: -11, -12

009 SG_RESET_N
008 SG_CTRL — CS_SG0, CS_SG1, SG_CNT_MODE, SG_LOOP_CUT, SG_PLL_LOCK, SG_REF_EXT
009 SG_WEOE
008, 010, 011 CPU_DT
008, 009, 011 CPU_AD

+12V-2 — C401 47uF 35V — GND

CN401 (1/40)	1	DC_IN	
CN401 (3/40)	3	DC_IN	
CN401 (5/40)	5	GND	
CN401 (7/40)	7	GND	
CN401 (9/40)	9	ADD0	CPU_AD1
CN401 (11/40)	11	ADD2	CPU_AD3
CN401 (13/40)	13	INC	
CN401 (15/40)	15	DATA0	CPU_DT0
CN401 (17/40)	17	DATA2	CPU_DT2
CN401 (19/40)	19	DATA4	CPU_DT4
CN401 (21/40)	21	DATA6	CPU_DT6
CN401 (23/40)	23	SCL	
CN401 (25/40)	25	CS0	CS_SG0
CN401 (27/40)	27	WR	SG_WE_N
CN401 (29/40)	29	CKX_SG	
CN401 (31/40)	31	CNT_MODE	SG_CNT_MODE
CN401 (33/40)	33	RST	
CN401 (35/40)	35	REF_EXT	SG_REF_EXT
CN401 (37/40)	37	JDI	SG_TDI
CN401 (39/40)	39	JCLK	SG_TCK

R401 1k — REF_EXT — D401 CL-196YG-CD-T

+12V-2 — C402 47uF 35V — GND

CN401 (2/40)	2	DC_IN	
CN401 (4/40)	4	DC_IN	
CN401 (6/40)	6	GND	
CN401 (8/40)	8	GND	
CN401 (10/40)	10	ADD1	CPU_AD2
CN401 (12/40)	12	ADD3	CPU_AD4
CN401 (14/40)	14	INC	
CN401 (16/40)	16	DATA1	CPU_DT1
CN401 (18/40)	18	DATA3	CPU_DT3
CN401 (20/40)	20	DATA5	CPU_DT5
CN401 (22/40)	22	DATA7	CPU_DT7
CN401 (24/40)	24	SDA	
CN401 (26/40)	26	CS1	CS_SG1
CN401 (28/40)	28	RD	SG_OE_N
CN401 (30/40)	30	GND	
CN401 (32/40)	32	LOOP_CUT	SG_LOOP_CUT
CN401 (34/40)	34	GND	
CN401 (36/40)	36	PLL_LOCK	SG_PLL_LOCK
CN401 (38/40)	38	JTMS	SG_TMS
CN401 (40/40)	40	JDO	SG_TDO

R402 1k — SG_LOCK — D402 CL-196YG-CD-T

012 SG_JTAG — SG_TCK, SG_TDI, SG_TDO, SG_TMS

001 REF_IN_FC — REF_IN_FC

CN402 (1/40)	1	GND	
CN402 (3/40)	3	REF_IN	REF_IN_FC
CN402 (5/40)	5	GND	
CN402 (7/40)	7	REF_OUT	
CN402 (9/40)	9	GND	
CN402 (11/40)	11	GND	
CN402 (13/40)	13	GND	
CN402 (15/40)	15	GND	
CN402 (17/40)	17	CLK0	
CN402 (19/40)	19	GND	
CN402 (21/40)	21	HCLK0	SG_HFCK0
CN402 (23/40)	23	GND	
CN402 (25/40)	25	CKX0	SG_CKX0
CN402 (27/40)	27	GND	
CN402 (29/40)	29	FD0	SG_FLOE0
CN402 (31/40)	31	GND	
CN402 (33/40)	33	VD0	SG_VD0
CN402 (35/40)	35	GND	
CN402 (37/40)	37	HD0	SG_HD0
CN402 (39/40)	39	GND	

CN402 (2/40)	2	GND	
CN402 (4/40)	4	REF_G	
CN402 (6/40)	6	GND	
CN402 (8/40)	8	GND	
CN402 (10/40)	10	GND	
CN402 (12/40)	12	GND	
CN402 (14/40)	14	GND	
CN402 (16/40)	16	GND	
CN402 (18/40)	18	CLK1	
CN402 (20/40)	20	GND	
CN402 (22/40)	22	HCLK1	SG_HFCK1
CN402 (24/40)	24	GND	
CN402 (26/40)	26	CKX1	SG_CKX1
CN402 (28/40)	28	GND	
CN402 (30/40)	30	FD1	SG_FLOE1
CN402 (32/40)	32	GND	
CN402 (34/40)	34	VD1	SG_VD1
CN402 (36/40)	36	GND	
CN402 (38/40)	38	HD1	SG_HD1
CN402 (40/40)	40	GND	

SG BOARD CONNECTOR

C414 10000pF, C411 0.1uF — +3.3V — GND
IC401 SN74LVC245APWR (VCC 20, GND 10, DIR 1, OE 19)

SG_HFCK0	A1	B1	R413 0 — IN_HFCK 005
SG_CKX0	A5	B5	R417 0 — IN_CKX 007
SG_FLOE0	A6	B6	R418 0 — IN_FLOE 007
SG_VD0	A7	B7	R419 0 — IN_VD 007
SG_HD0	A8	B8	R415 0 — IN_HD 007

R403–R407 75 — C403–C407 10000pF — GND

C418 10000pF, C415 0.1uF — +3.3V — GND
IC402 SN65LVDS31DR (VCC 16, GND 8, G 12, G 4)

1A	1Y	FC_HFCKAP 001
1Z		FC_HFCKAN 001
2A	2Y	
2Z		
3A	3Y	FC_HFCKBP 001
3Z		FC_HFCKBN 001
4A	4Y	
4Z		

R410 75, C410 10000pF — +3.3V — GND

C419 10000pF, C416 0.1uF — +3.3V — GND
IC403 SN65LVDS31DR (VCC 16, GND 8, G 12, G 4)

1A	1Y	FC_CKXAP 001
1Z		FC_CKXAN 001
2A	2Y	FC_VDAP 001
2Z		FC_VDAN 001
3A	3Y	FC_VDBP 001
3Z		FC_VDBN 001
4A	4Y	FC_CKXBP 001
4Z		FC_CKXBN 001


R408, R411 75, C408 10000pF, C412 10000pF — +3.3V — GND

C420 10000pF, C417 0.1uF — +3.3V — GND
IC404 SN65LVDS31DR (VCC 16, GND 8, G 12, G 4)

1A	1Y	FC_HDAP 001
1Z		FC_HDAN 001
2A	2Y	FC_FLOEAP 001
2Z		FC_FLOEAN 001
3A	3Y	FC_FLOEBP 001
3Z		FC_FLOEBN 001
4A	4Y	FC_HDBP 001
4Z		FC_HDBN 001


R409, R412 75, C409 10000pF, C413 10000pF — +3.3V — GND

Format Converter Board
FC-109 (4/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_4

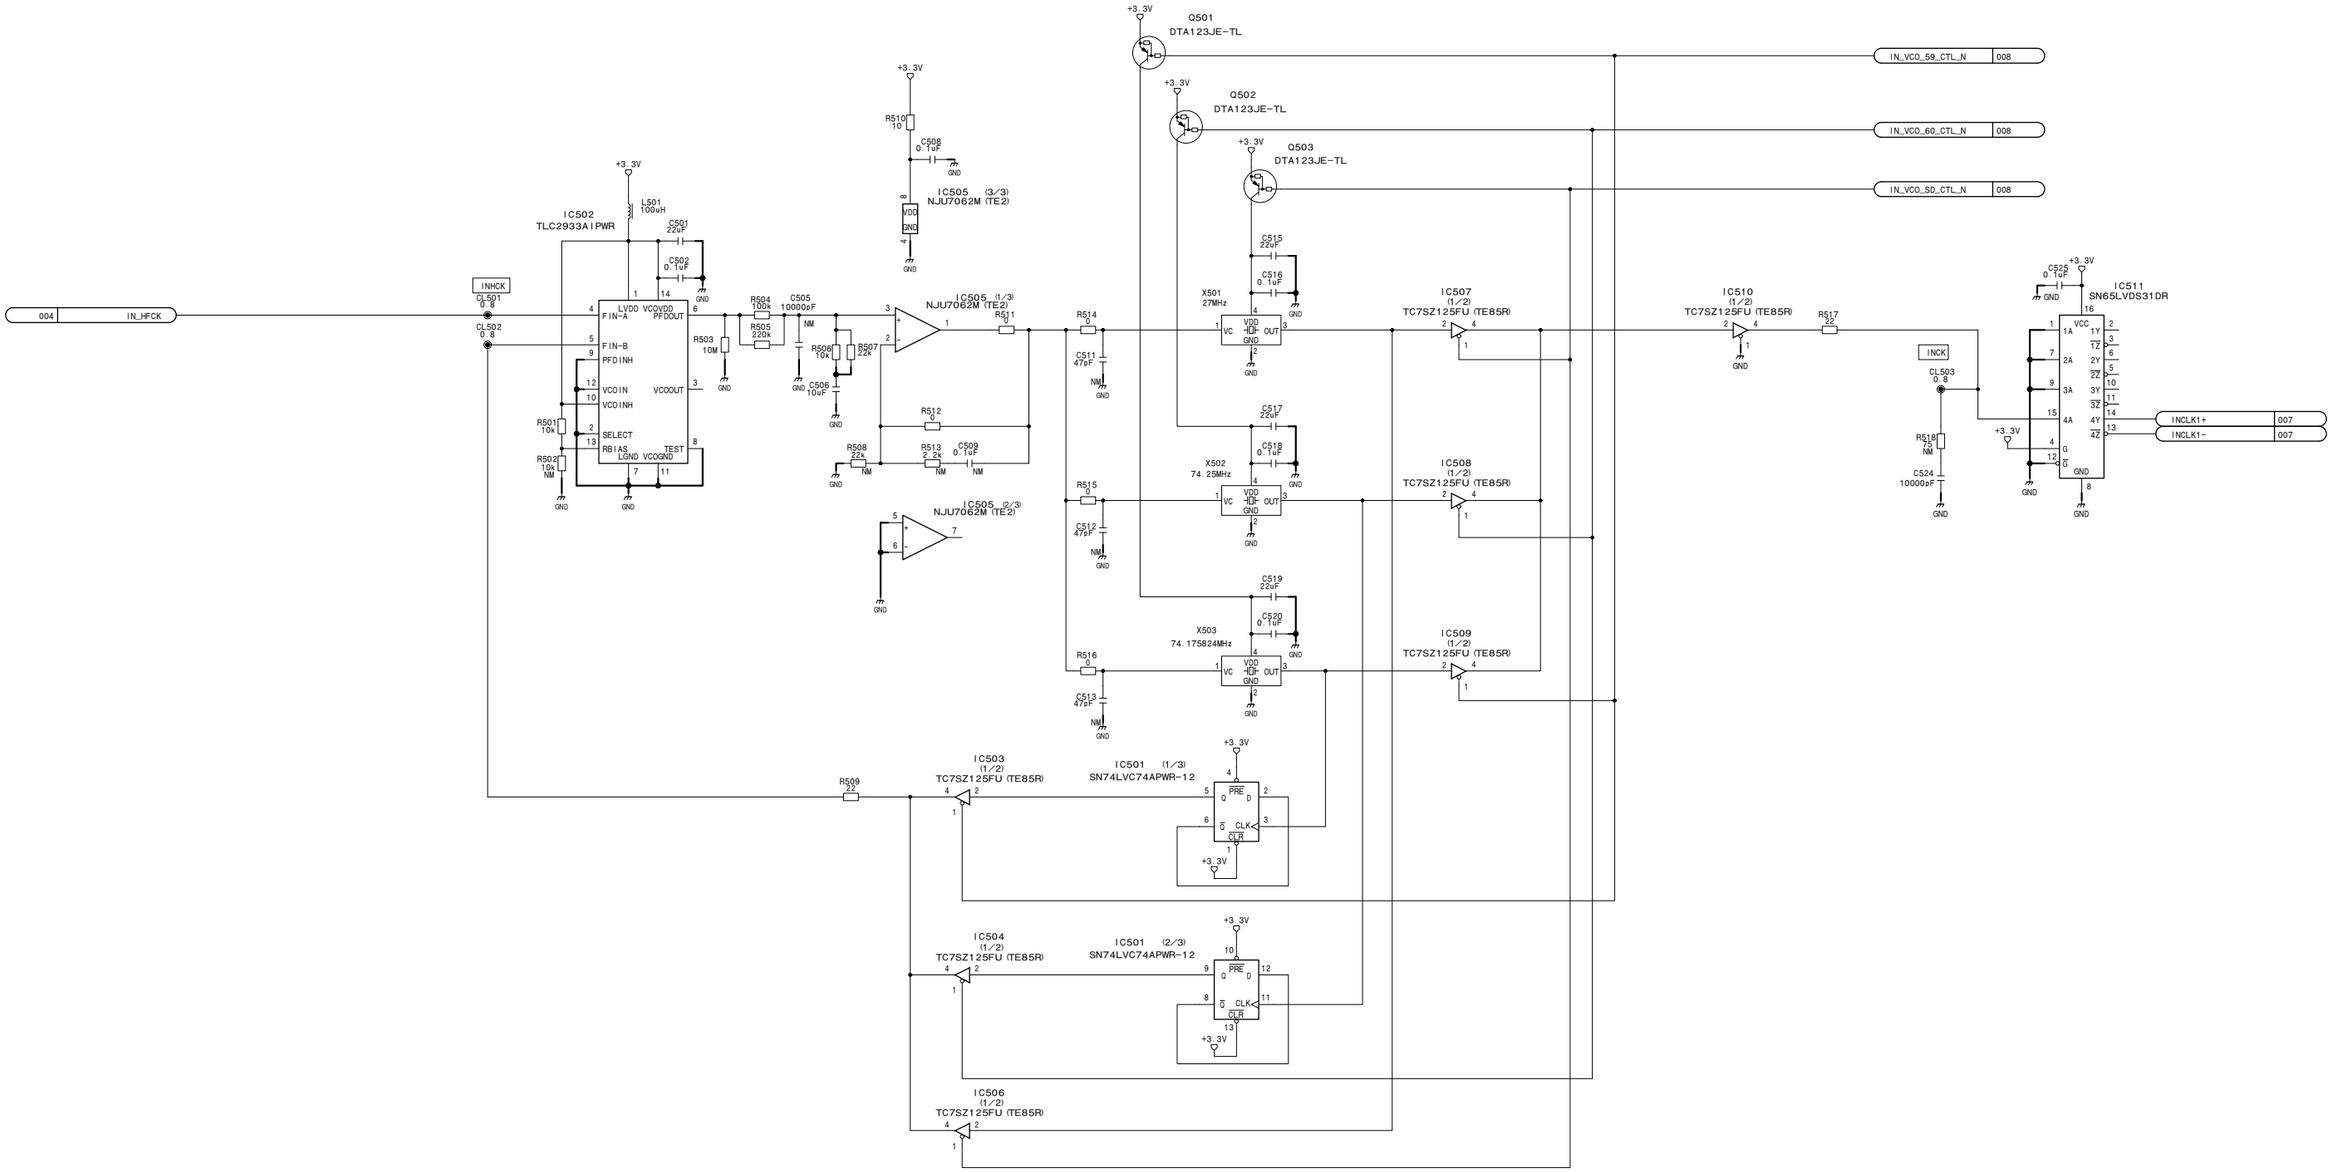


Format Converter Board
FC-109 (5/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_5


FC-109 (6/34)
SUFFIX: -11, -12

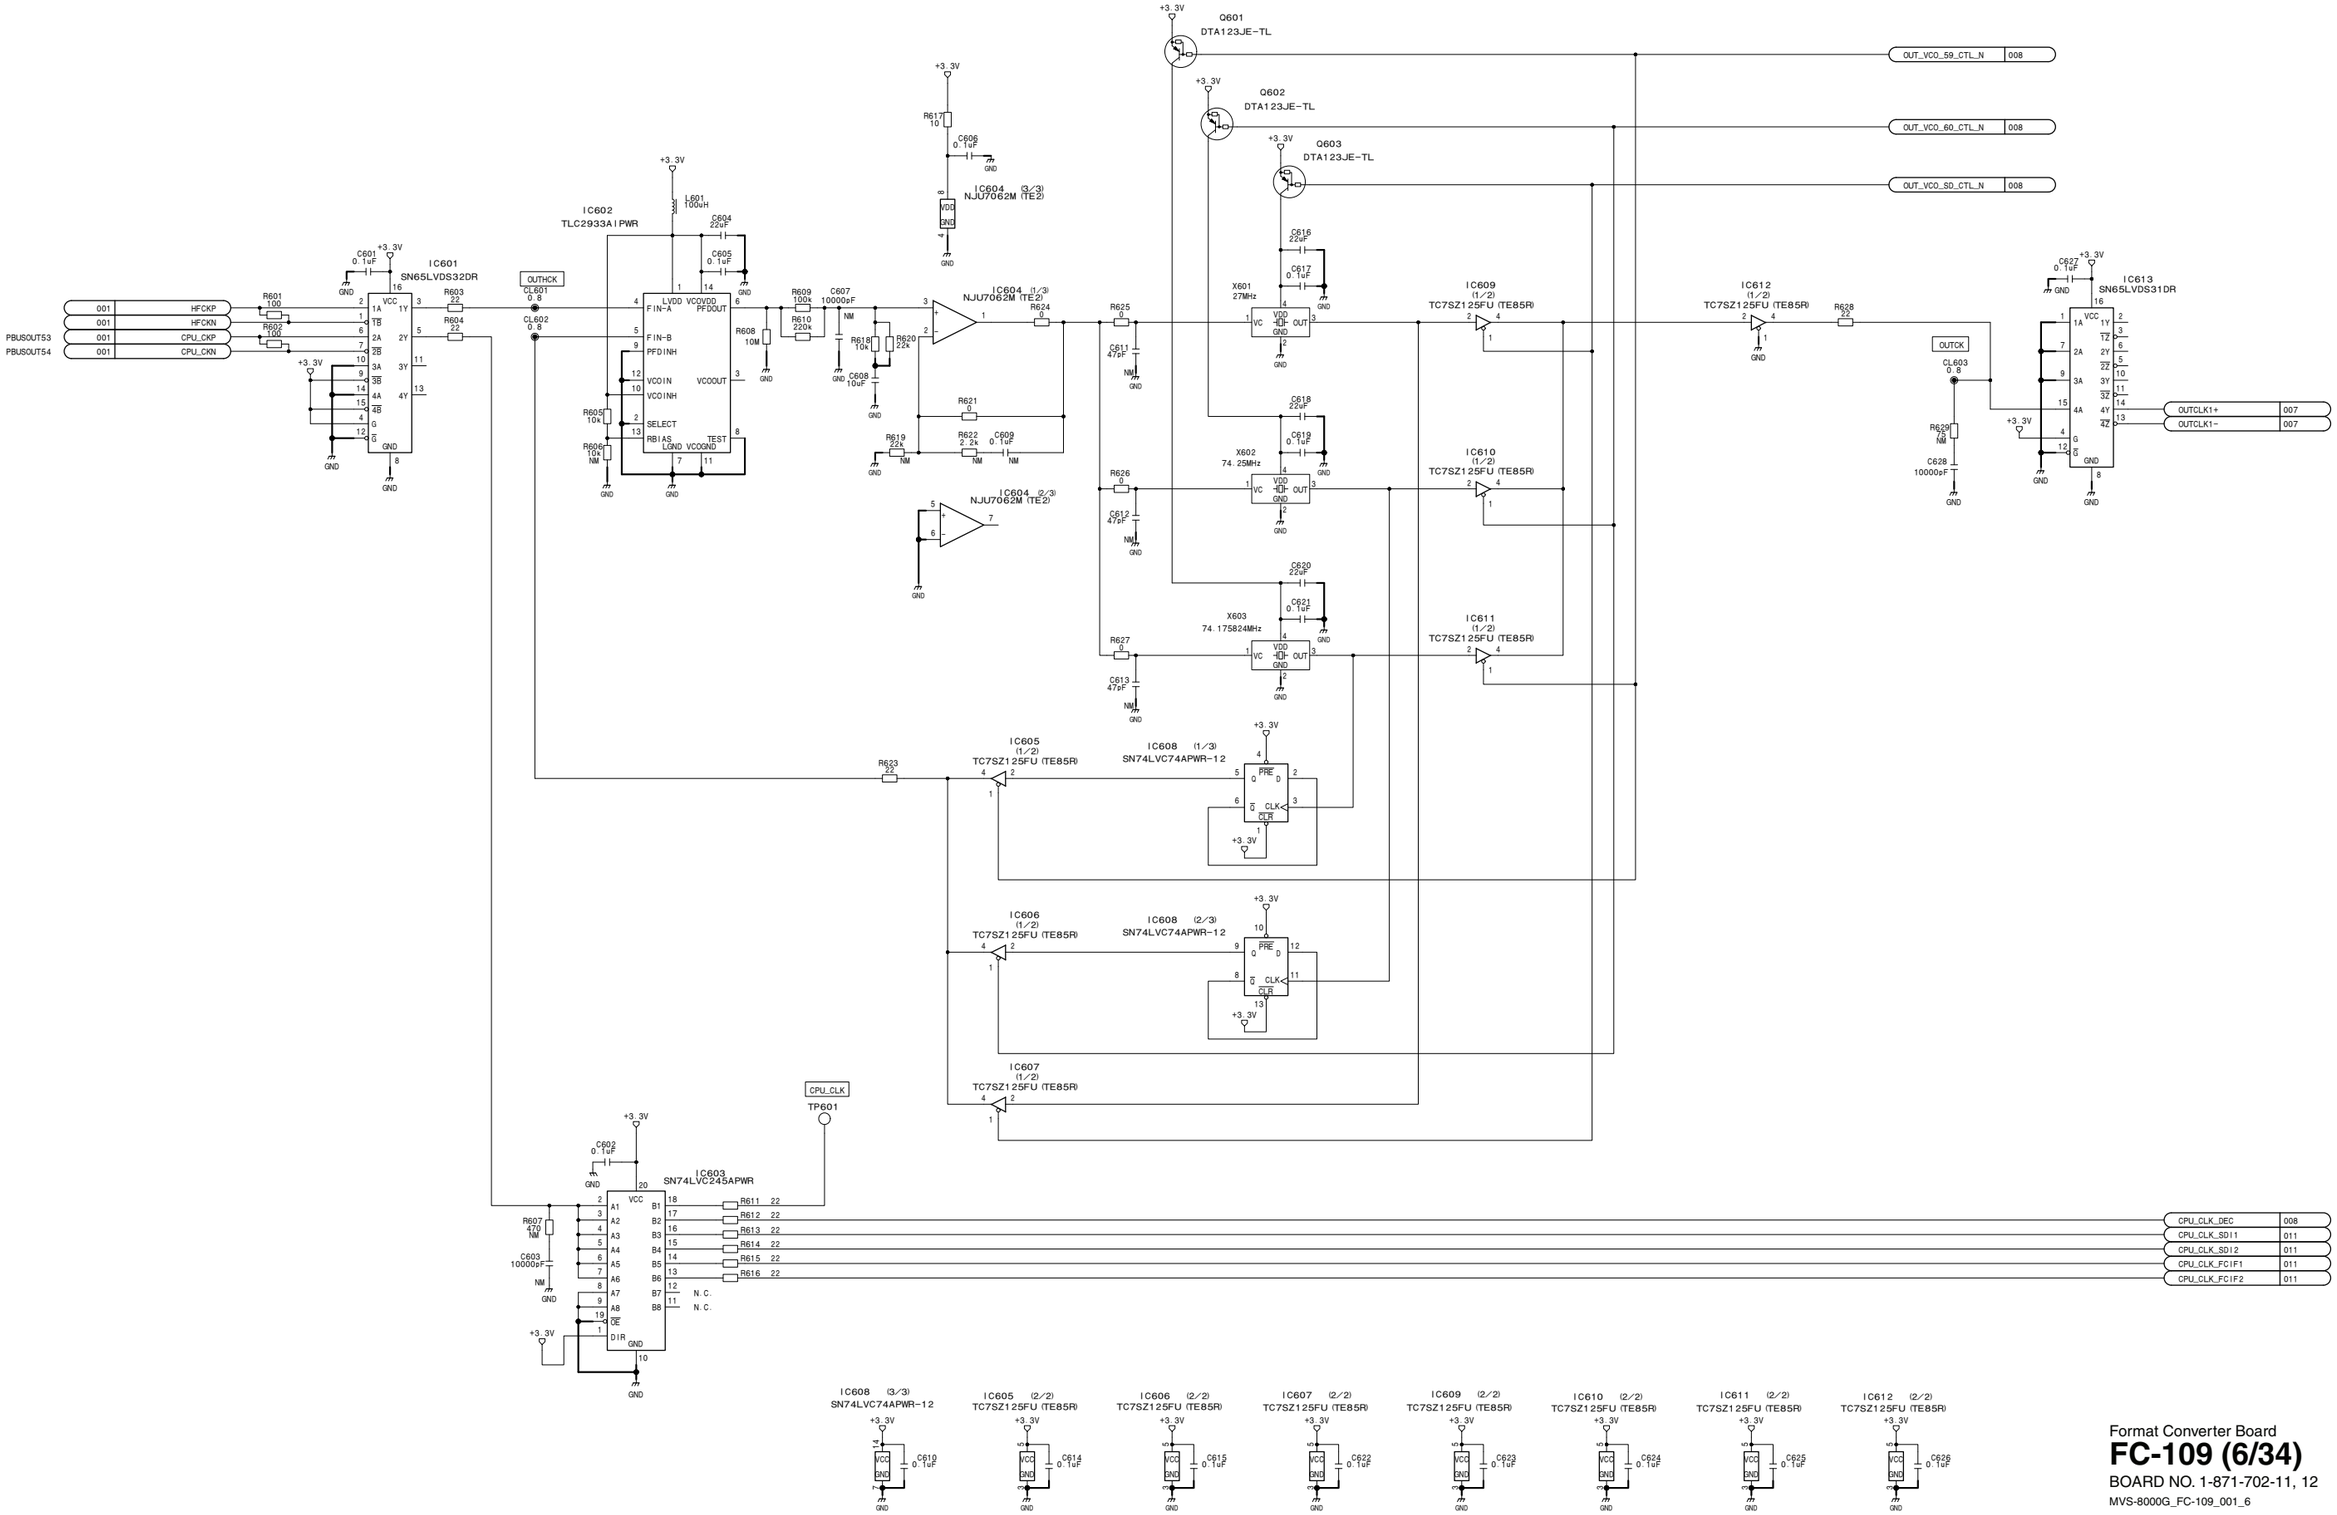

Format Converter Board
FC-109 (6/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_6

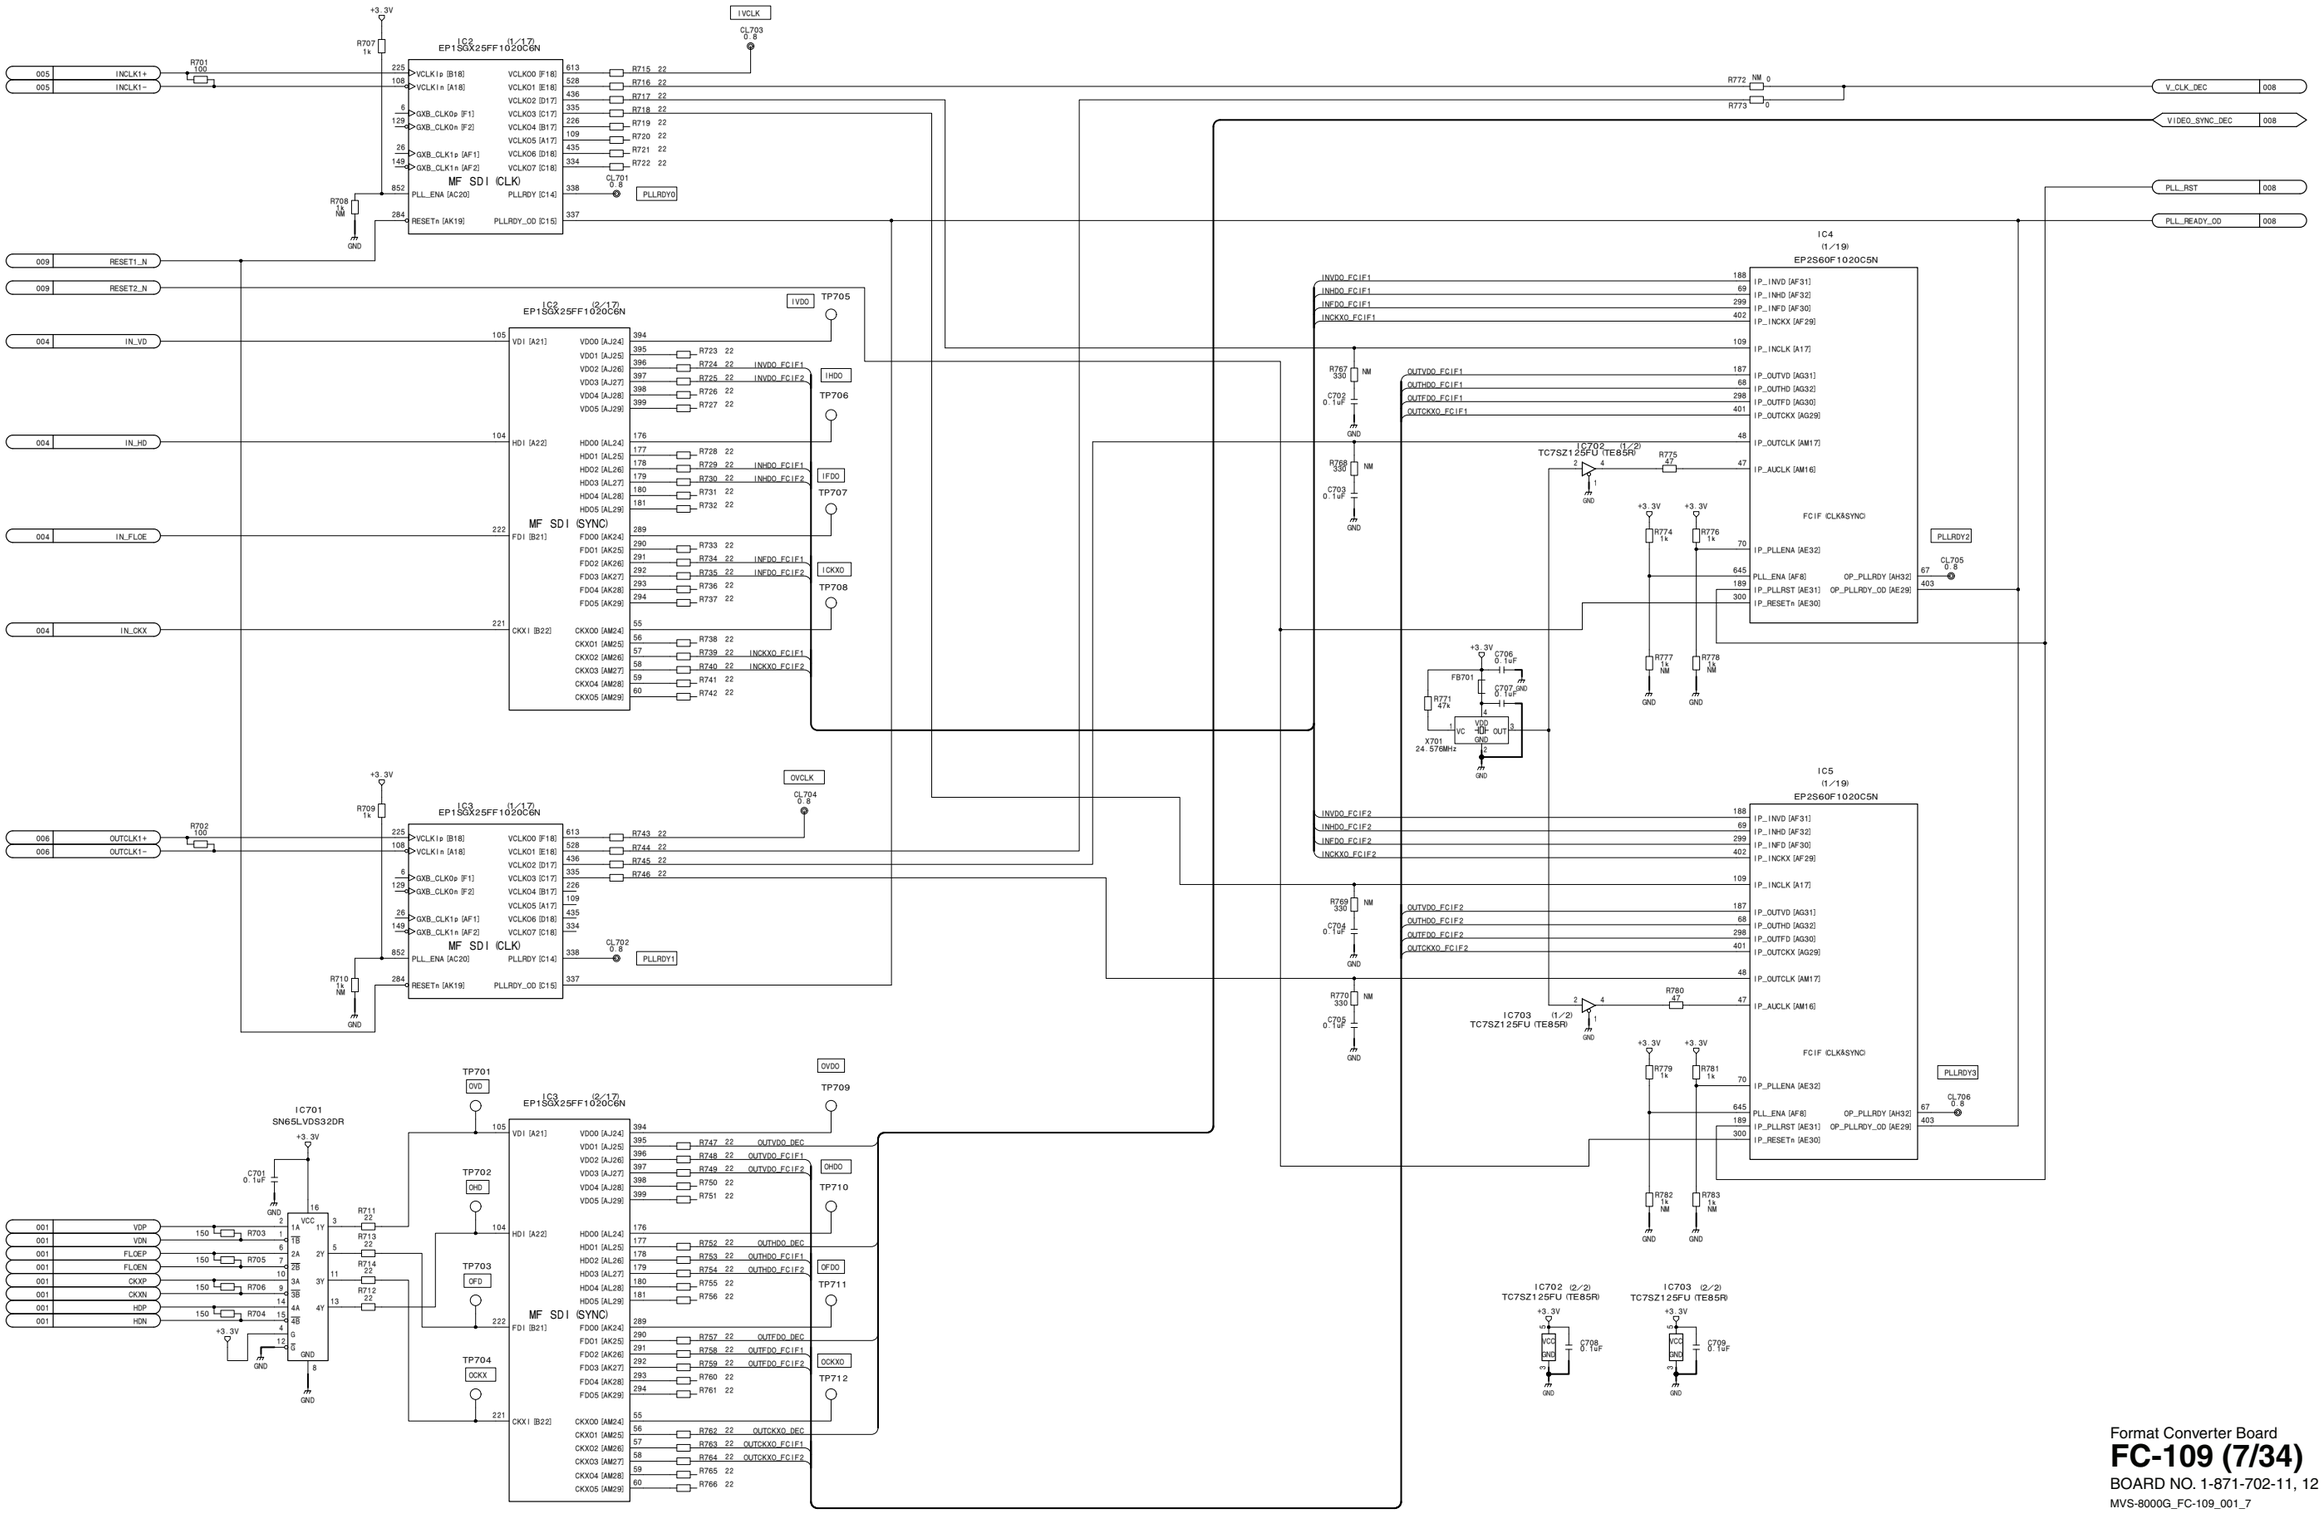


Format Converter Board
FC-109 (7/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_7

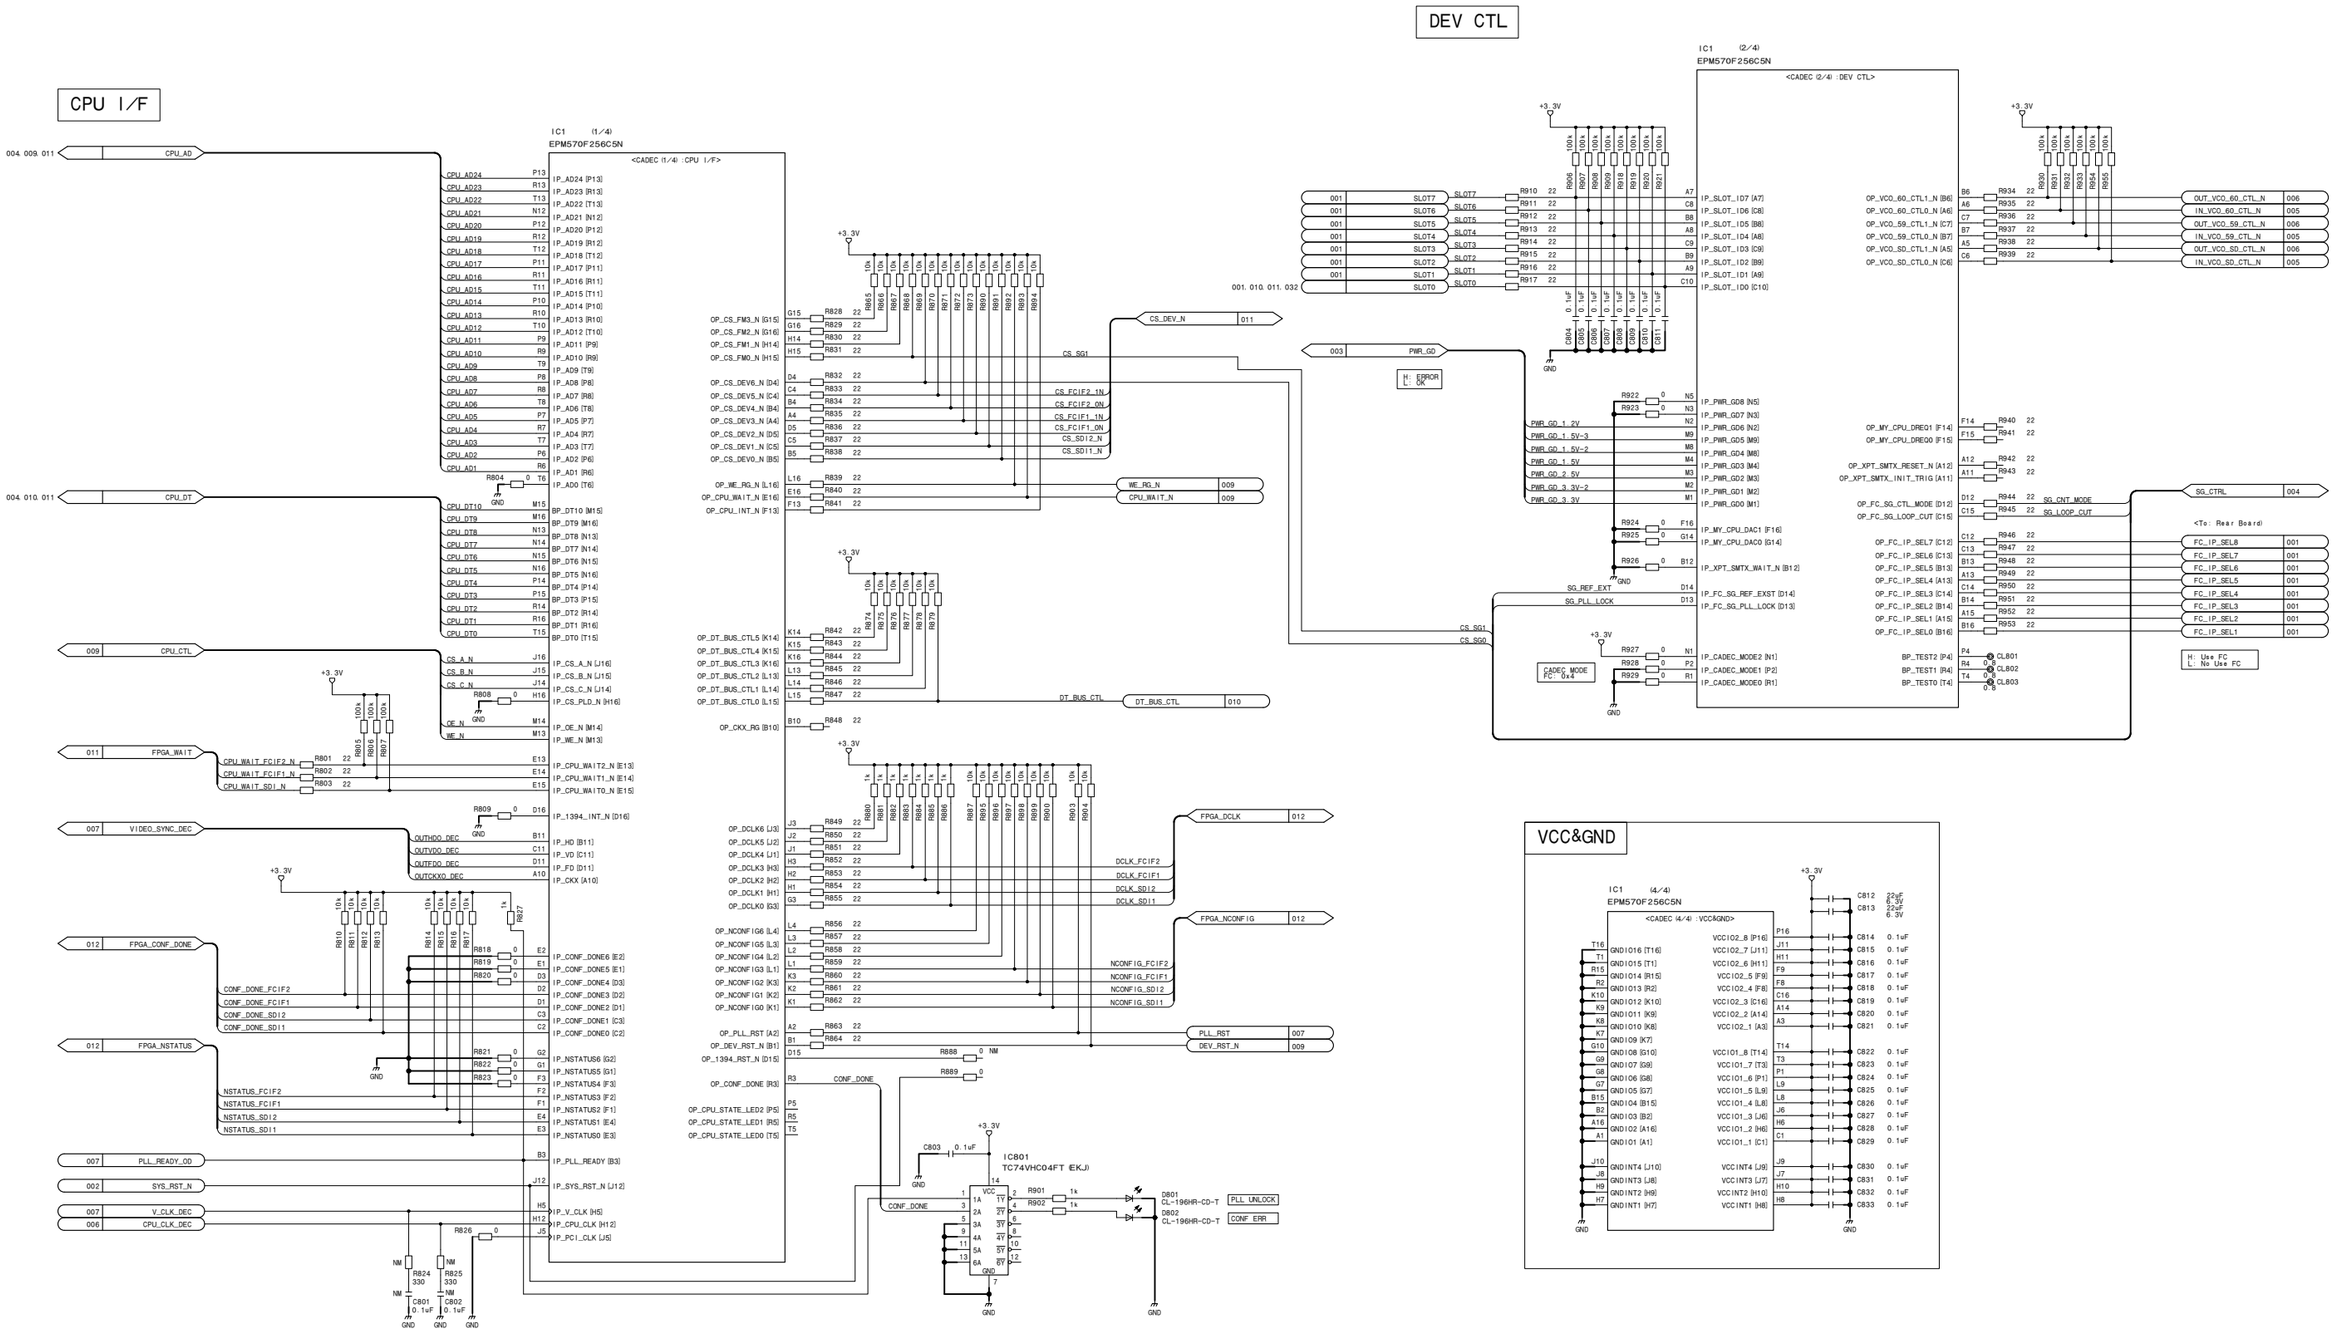

Format Converter Board
FC-109 (8/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_8


FC-109 (9/34)
SUFFIX: -11, -12

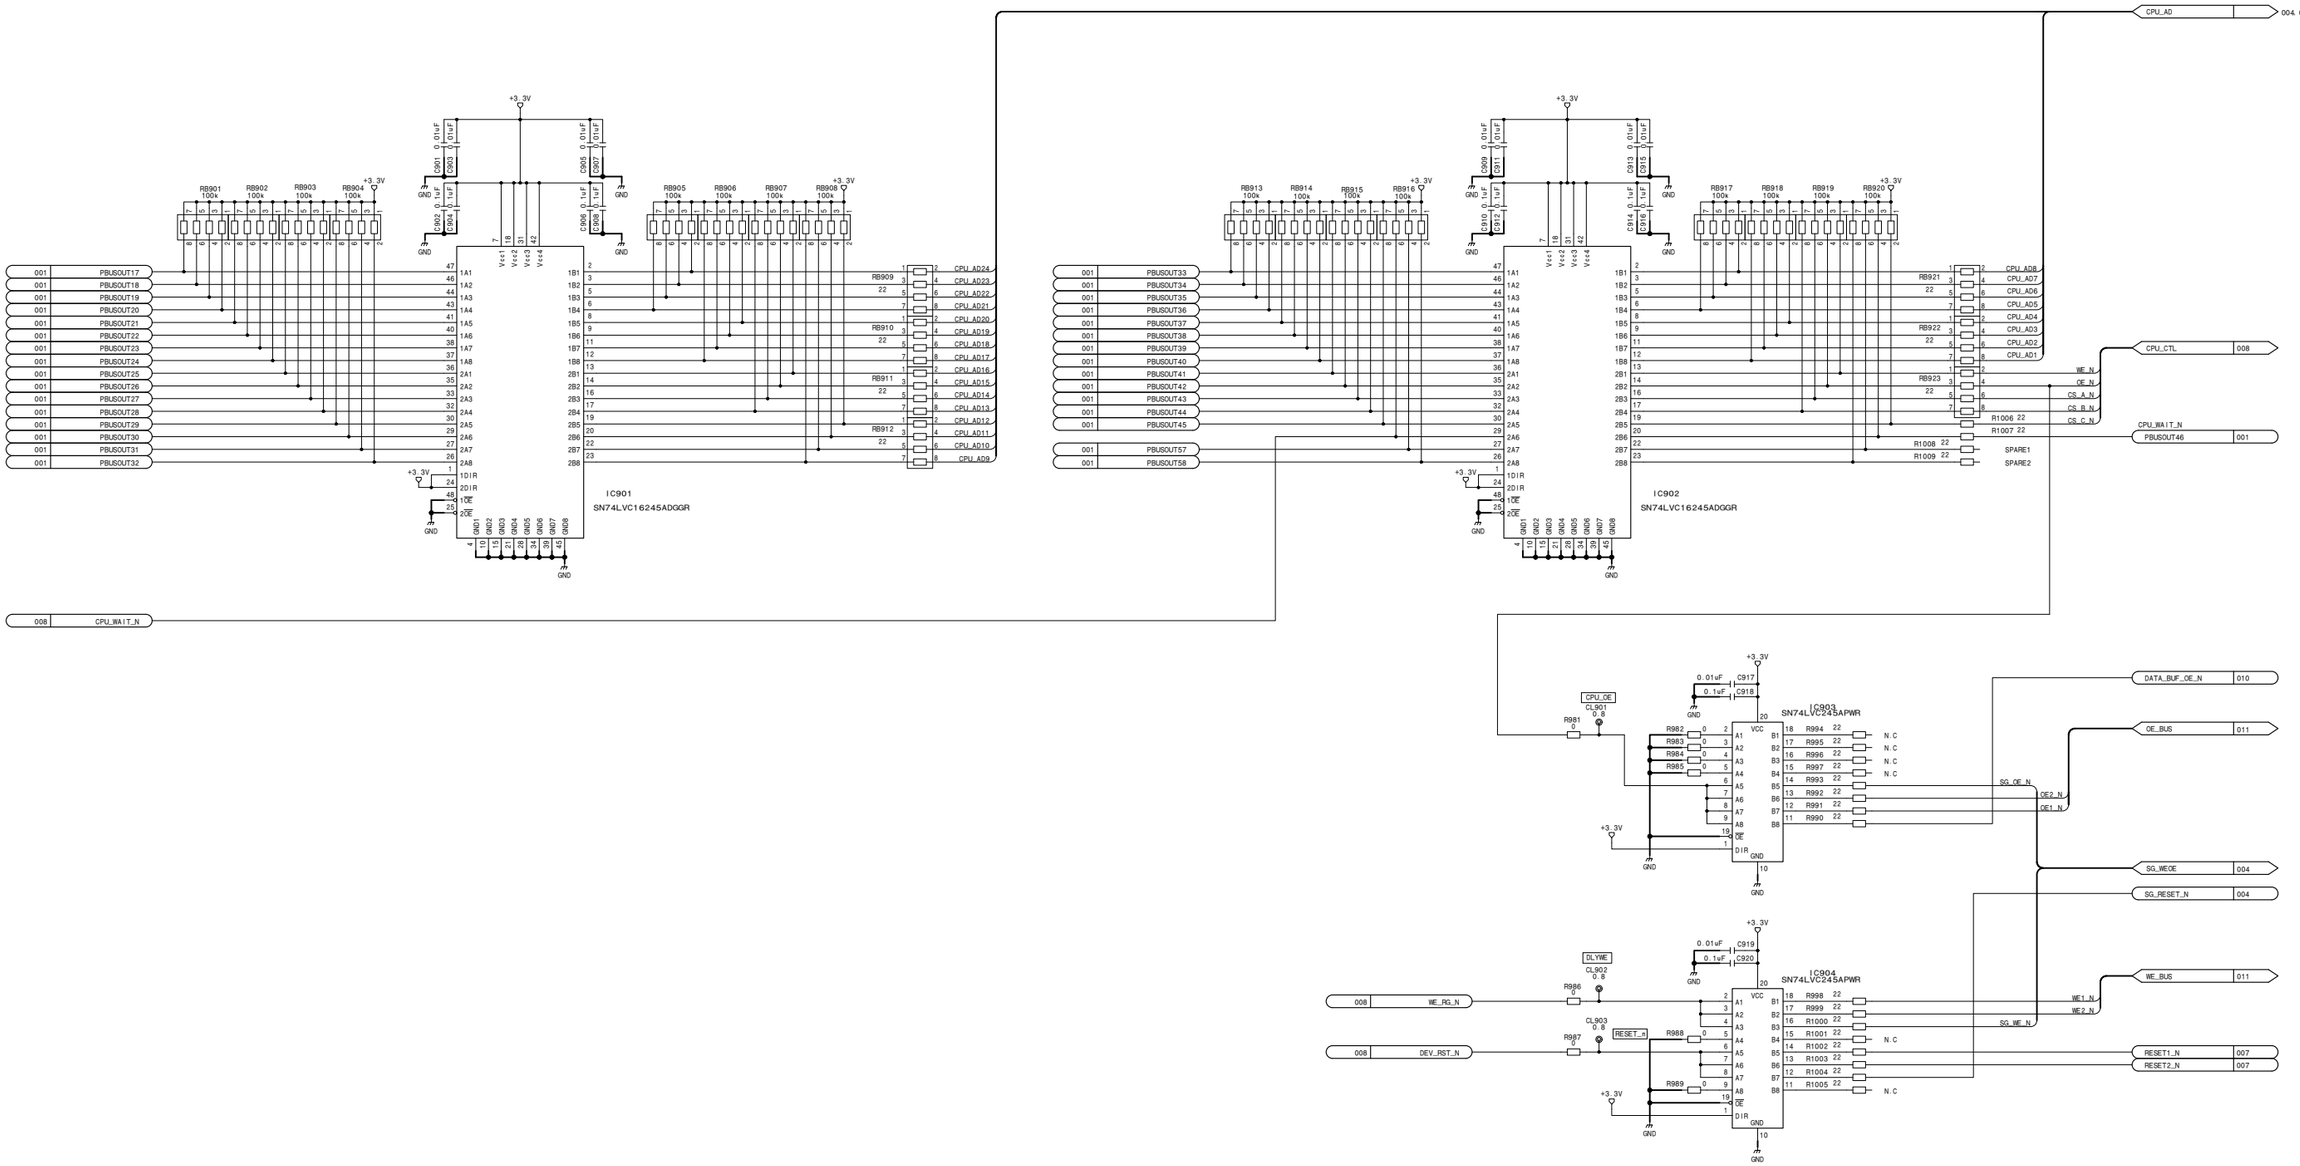



Format Converter Board
FC-109 (9/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_9

4-116

MVS-6000 MM

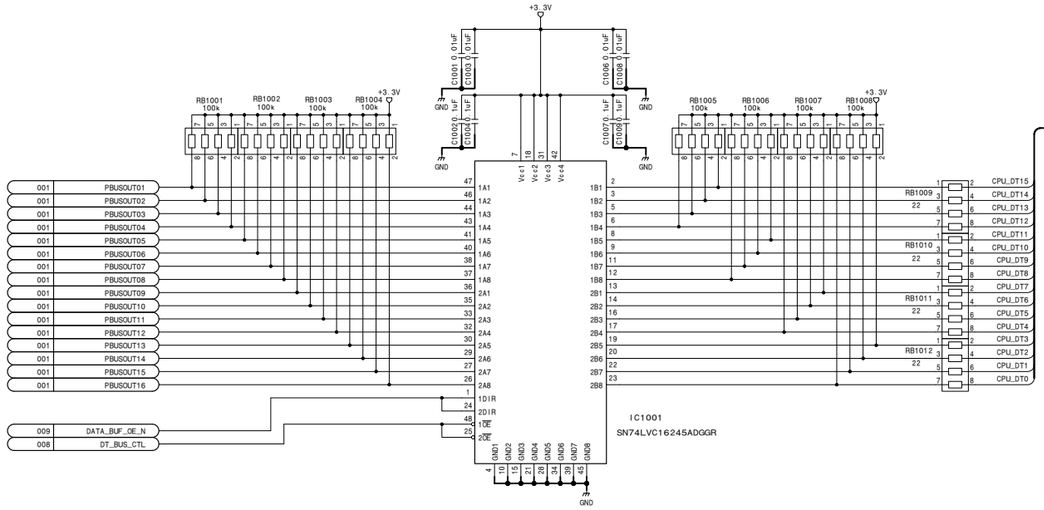


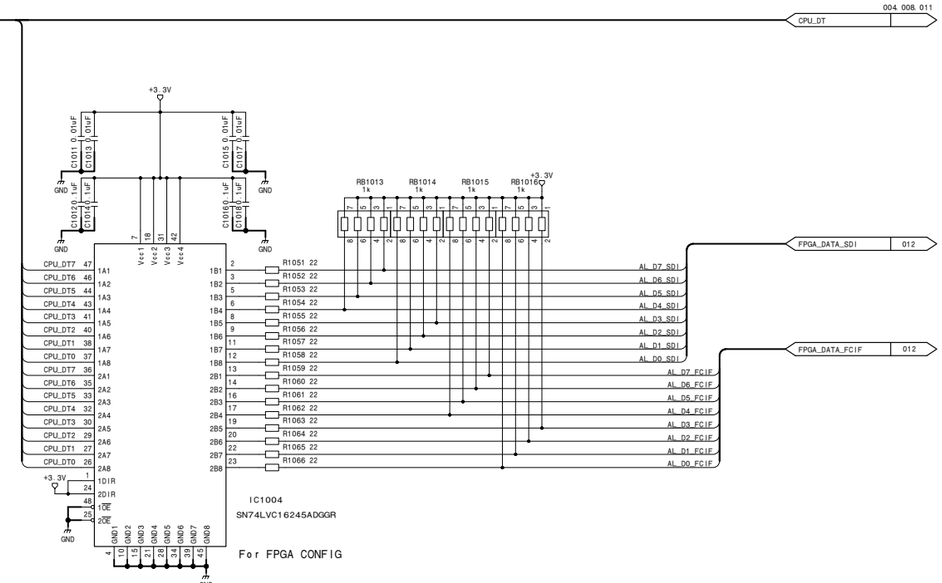

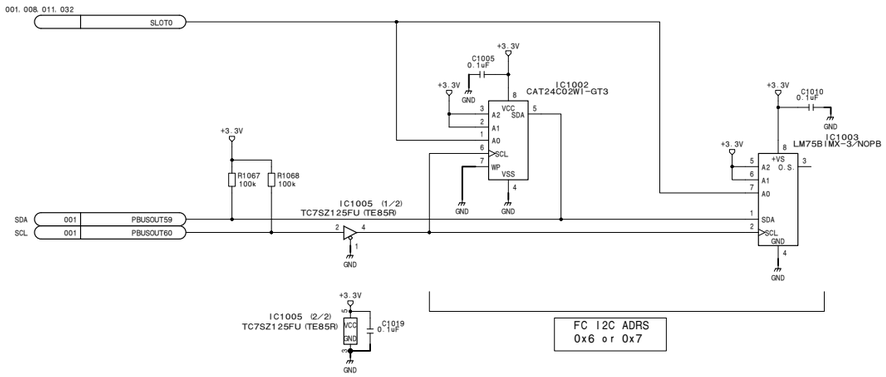

Format Converter Board
FC-109 (10/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_10

FC-109 (11/34)
SUFFIX: -11, -12

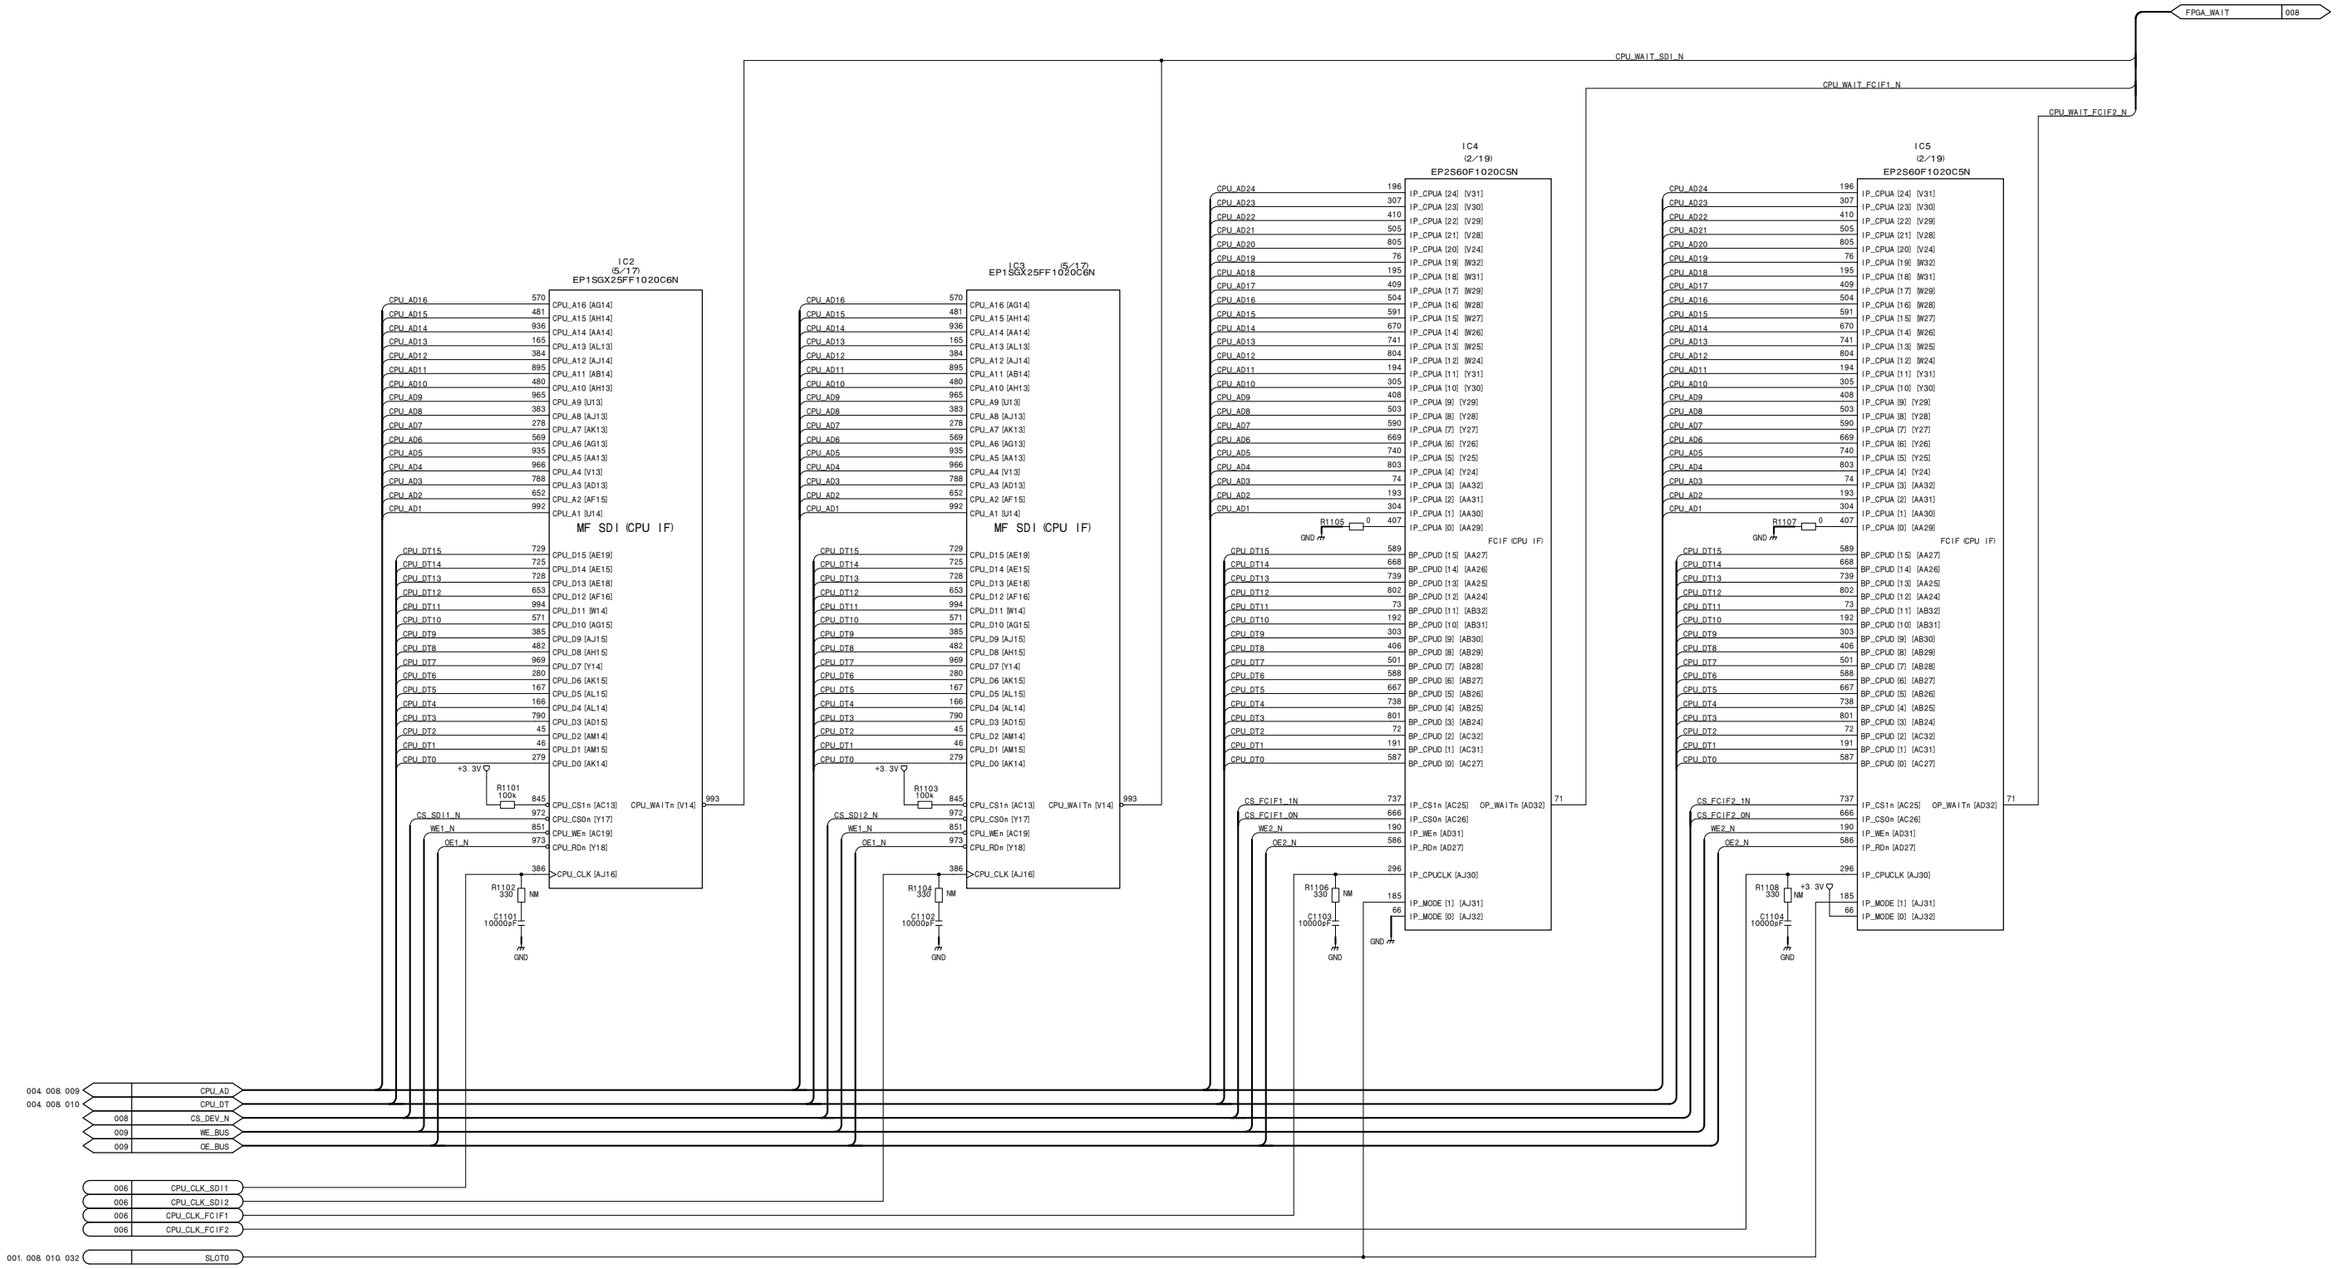


Format Converter Board
FC-109 (11/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_11


4-118

MVS-6000 MM

FC-109 (12/34)
SUFFIX: -11, -12

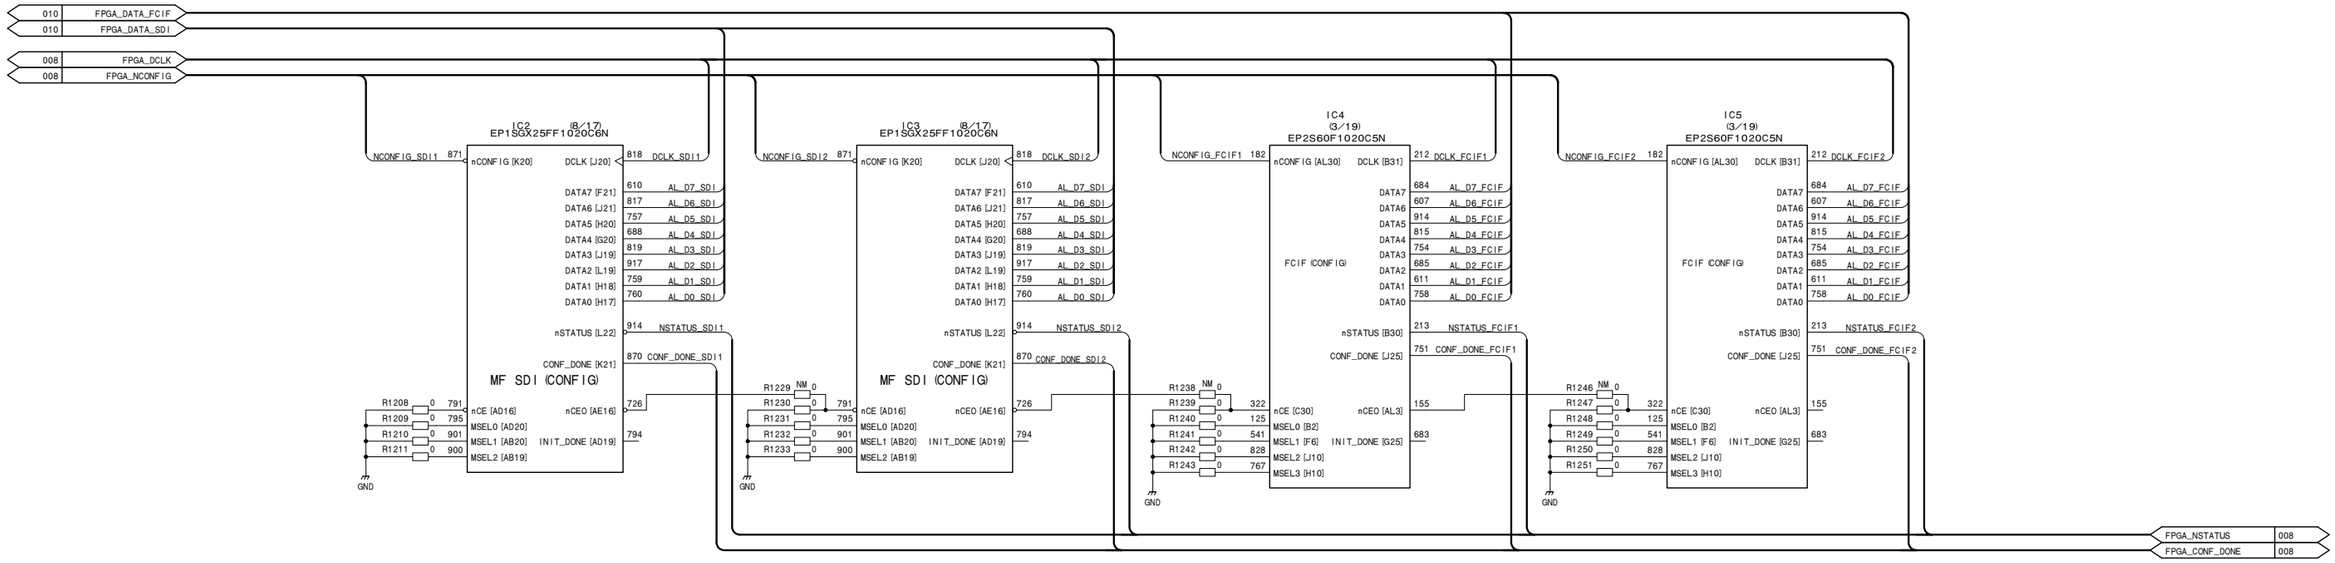


Ref / JTAG_CHAIN	R1234	R1235	R1254
CADEC (IC1)	M't	N.Mt	N.Mt
FULL	N.Mt	M't	M't

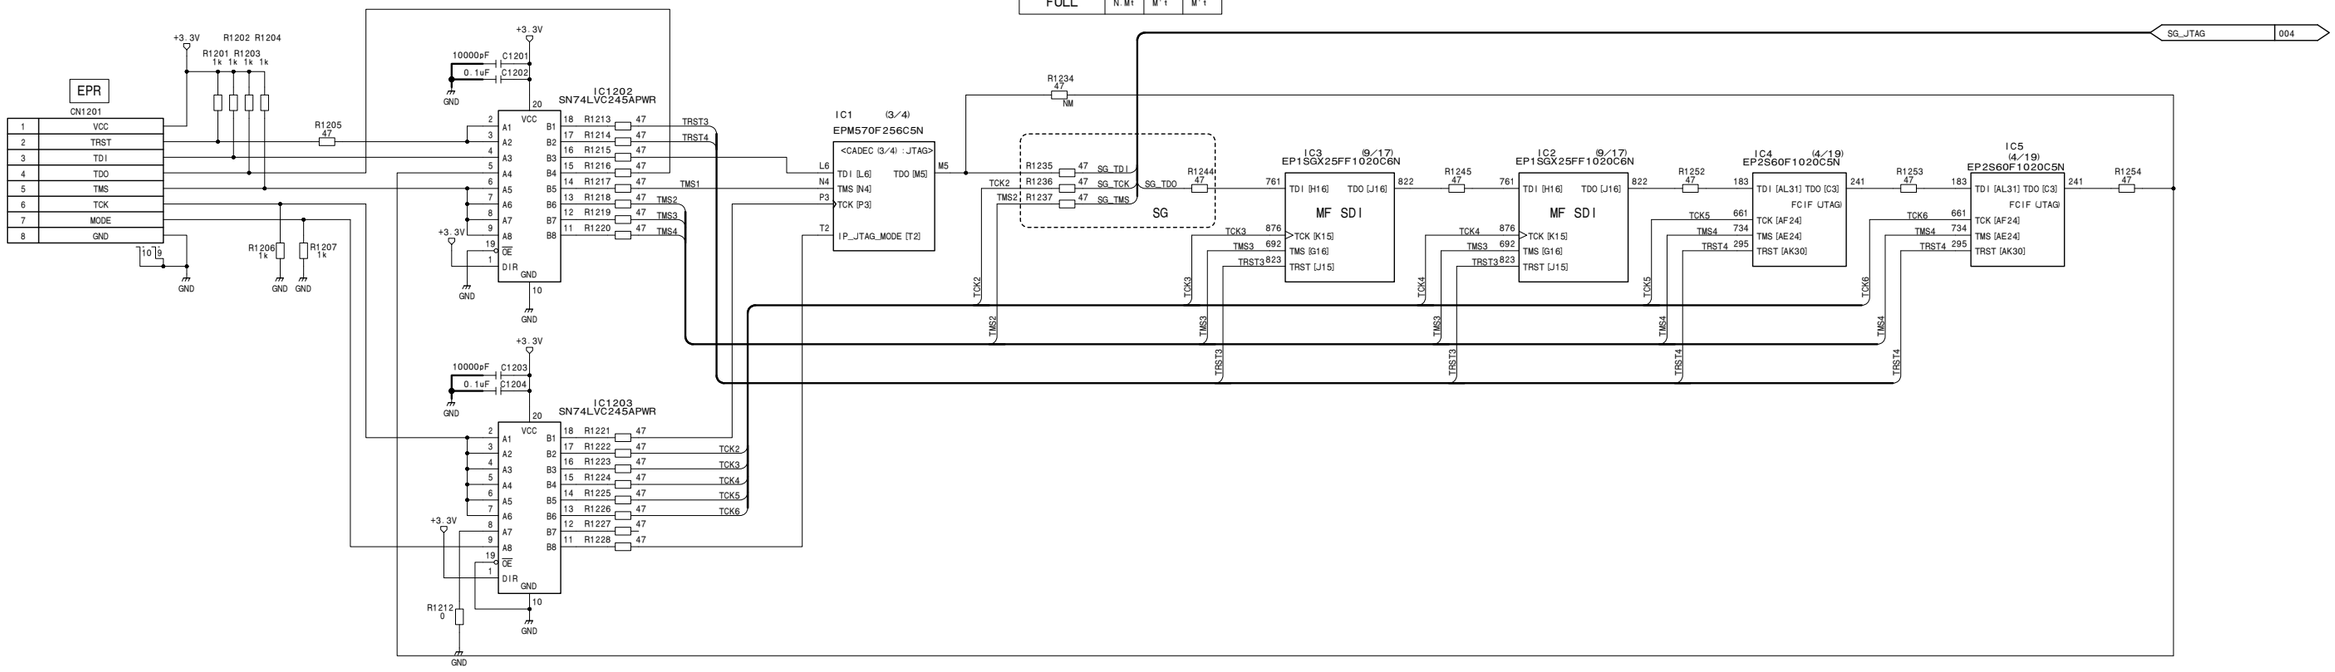


Format Converter Board
FC-109 (12/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_12

FC-109 (13/34)
SUFFIX: -11, -12

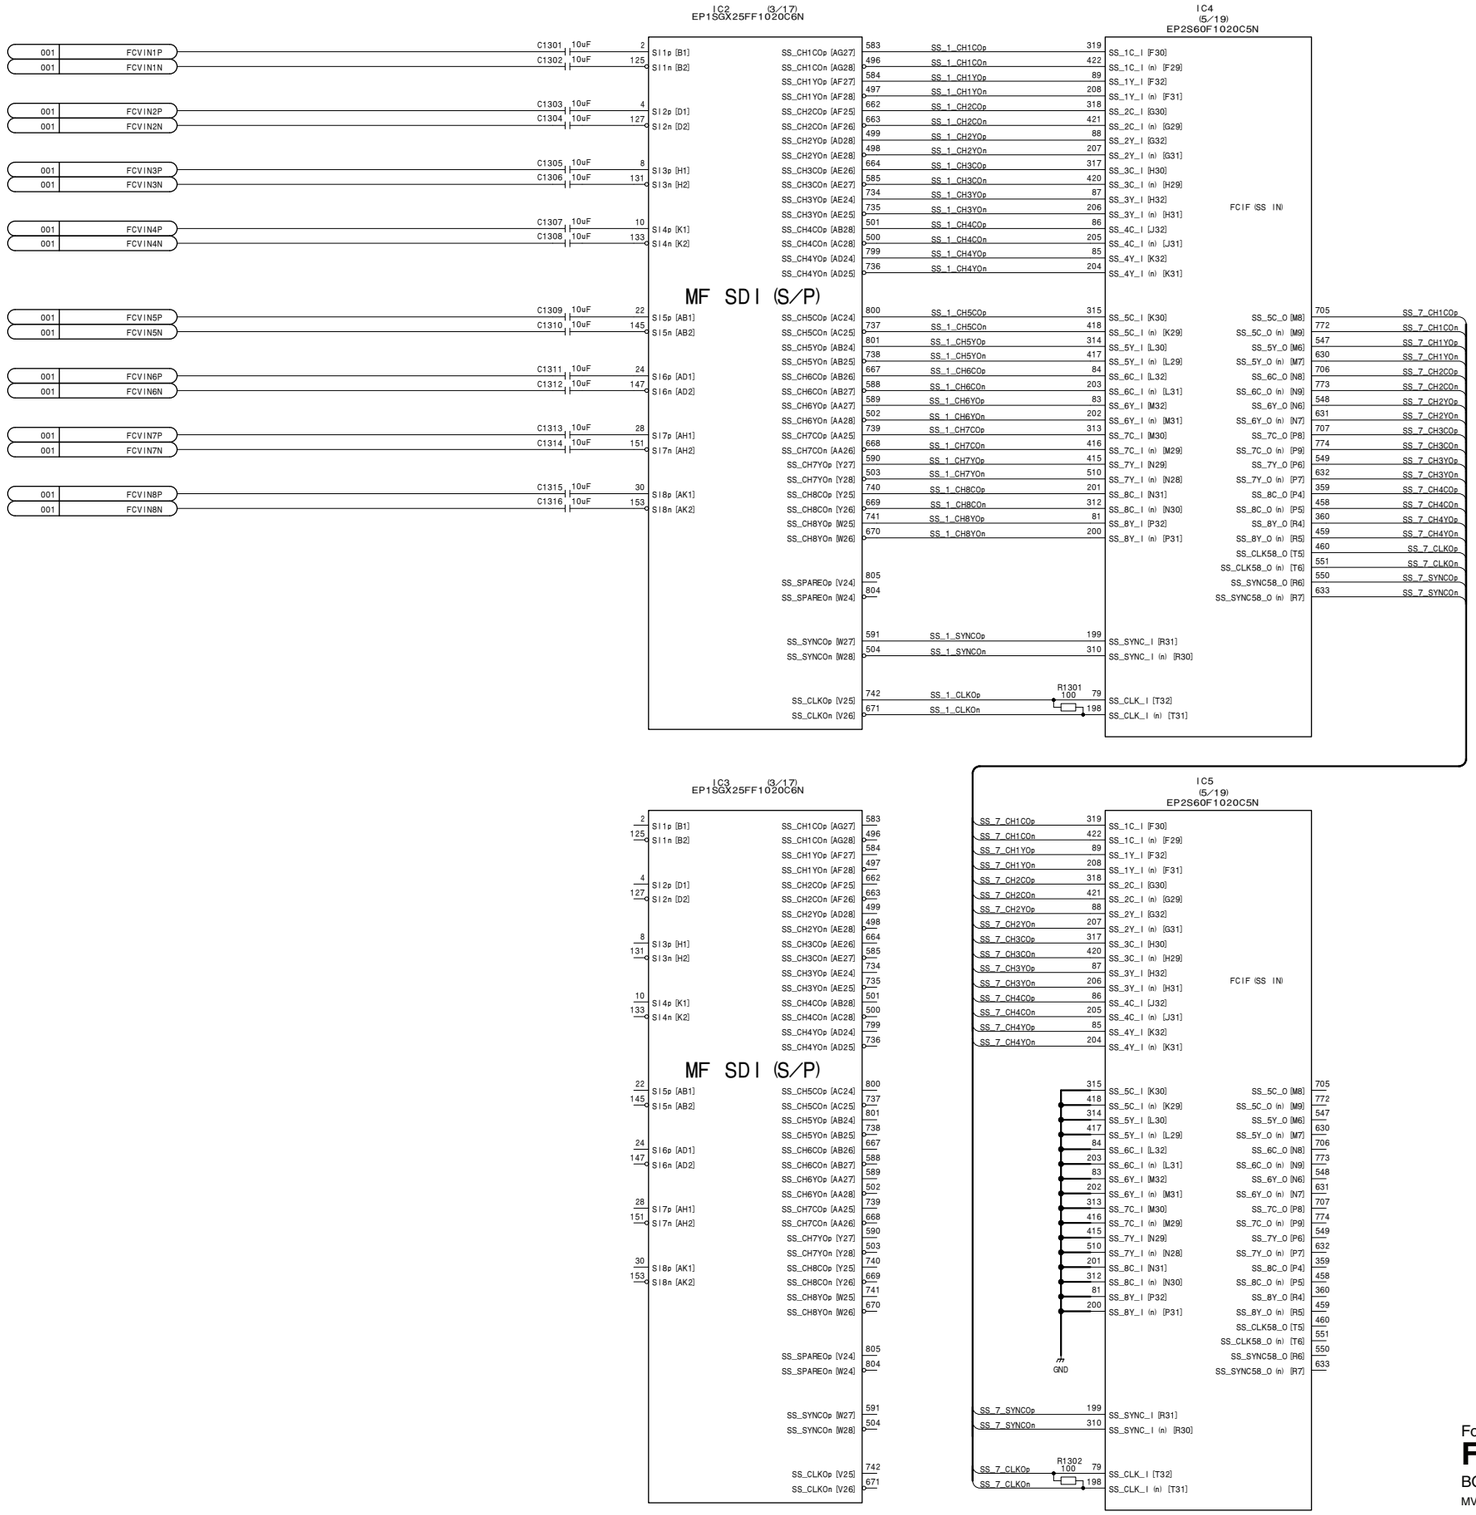


Format Converter Board
FC-109 (13/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_13

FC-109 (14/34)
SUFFIX: -11, -12

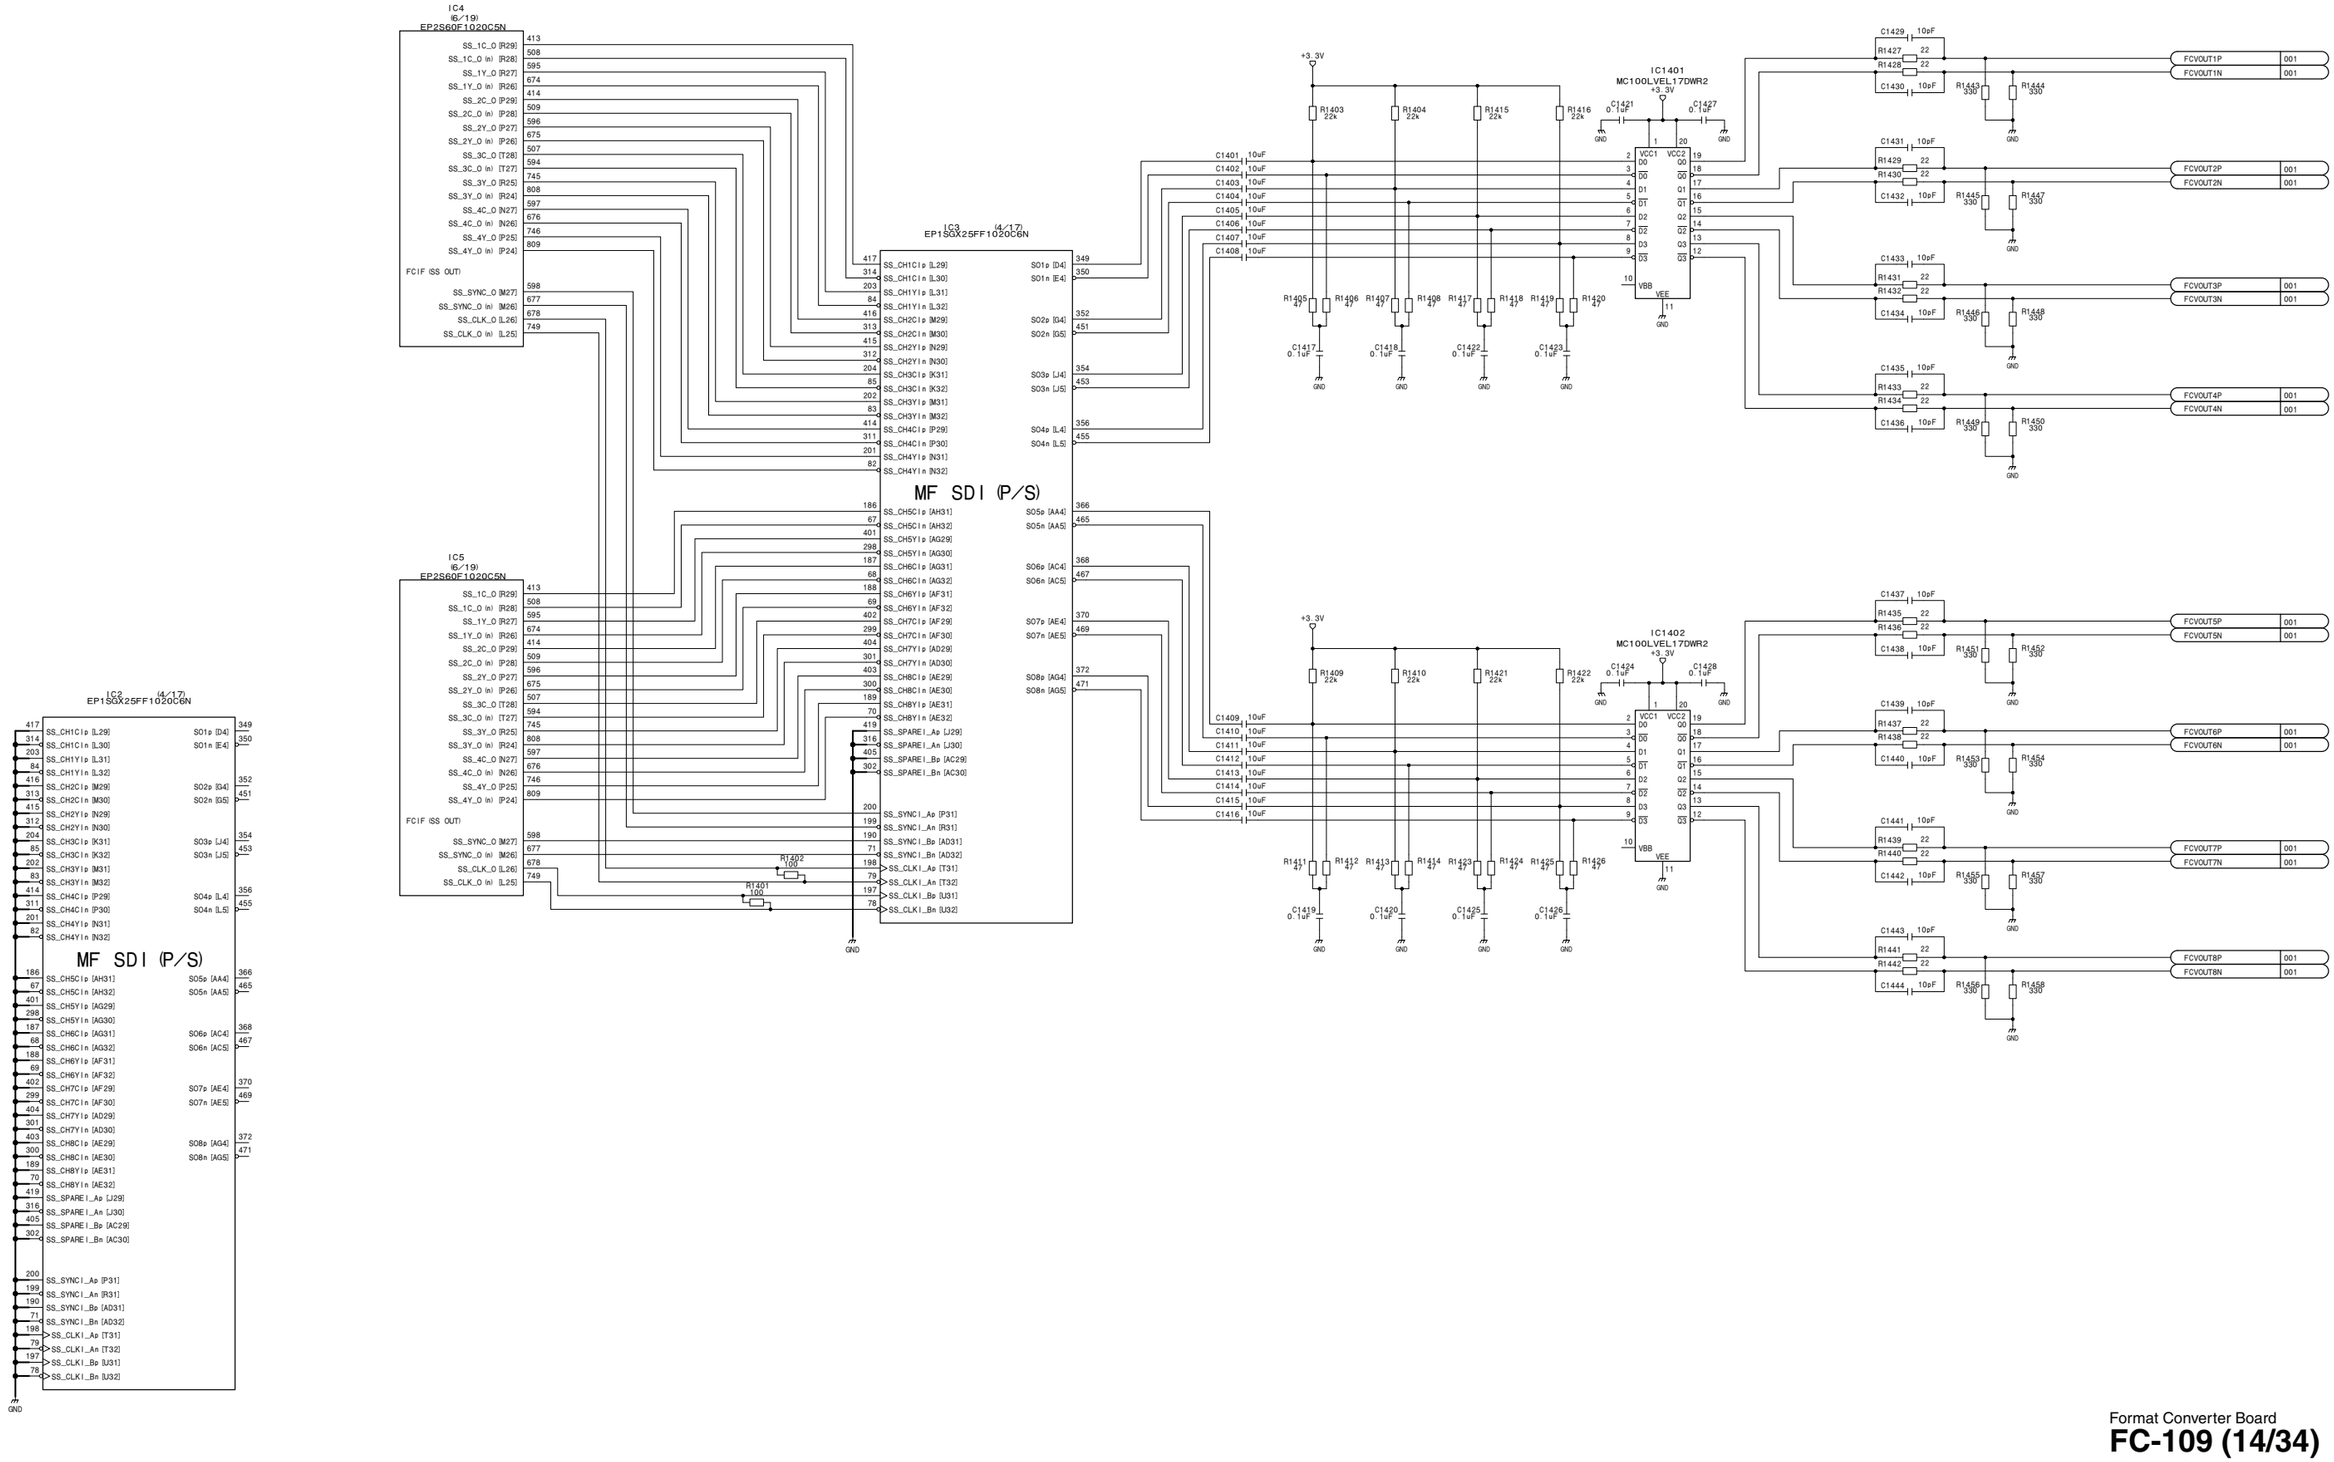

Format Converter Board
FC-109 (14/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_14


Virtual Module

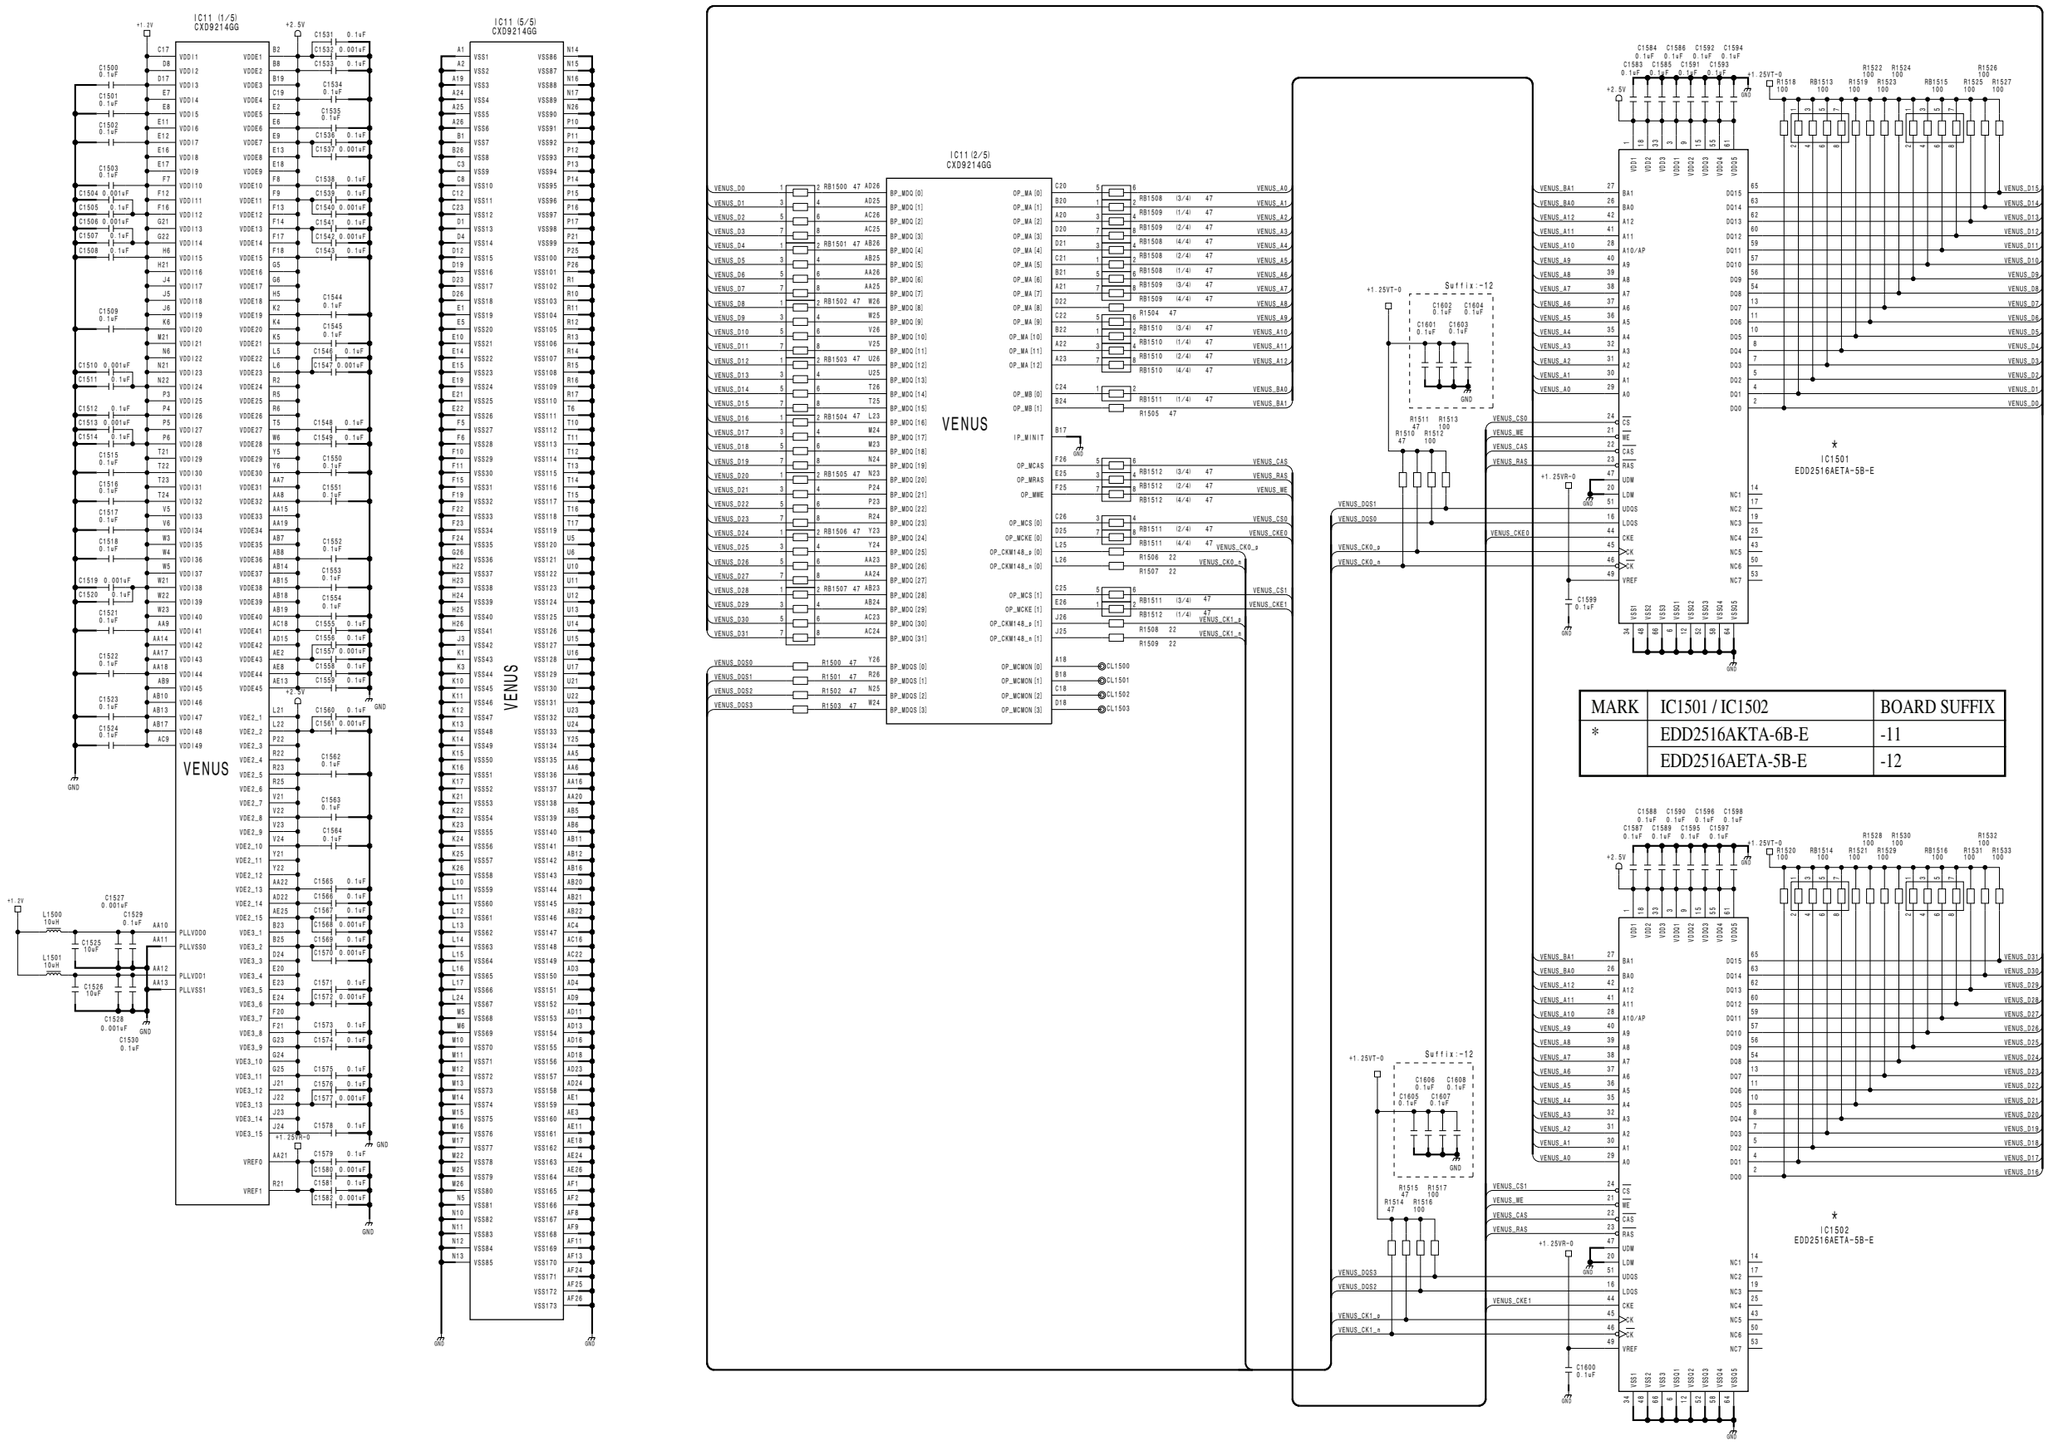


MARK	IC1501 / IC1502	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12

Format Converter Board
FC-109 (15/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_15


FC-109 (16/34)
SUFFIX: -11, -12

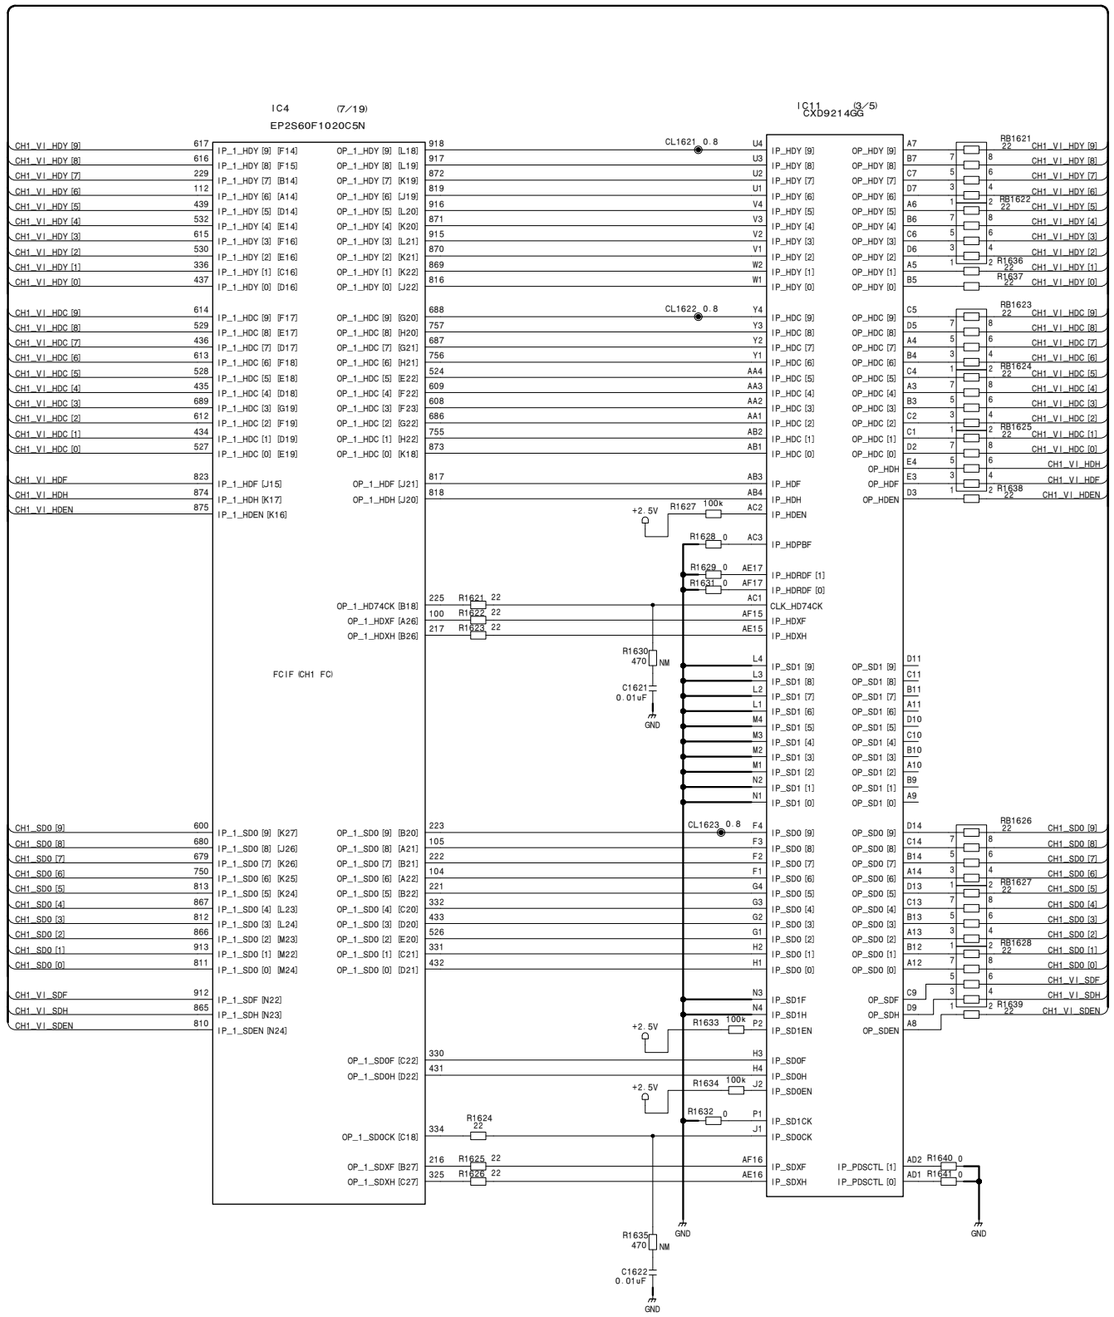

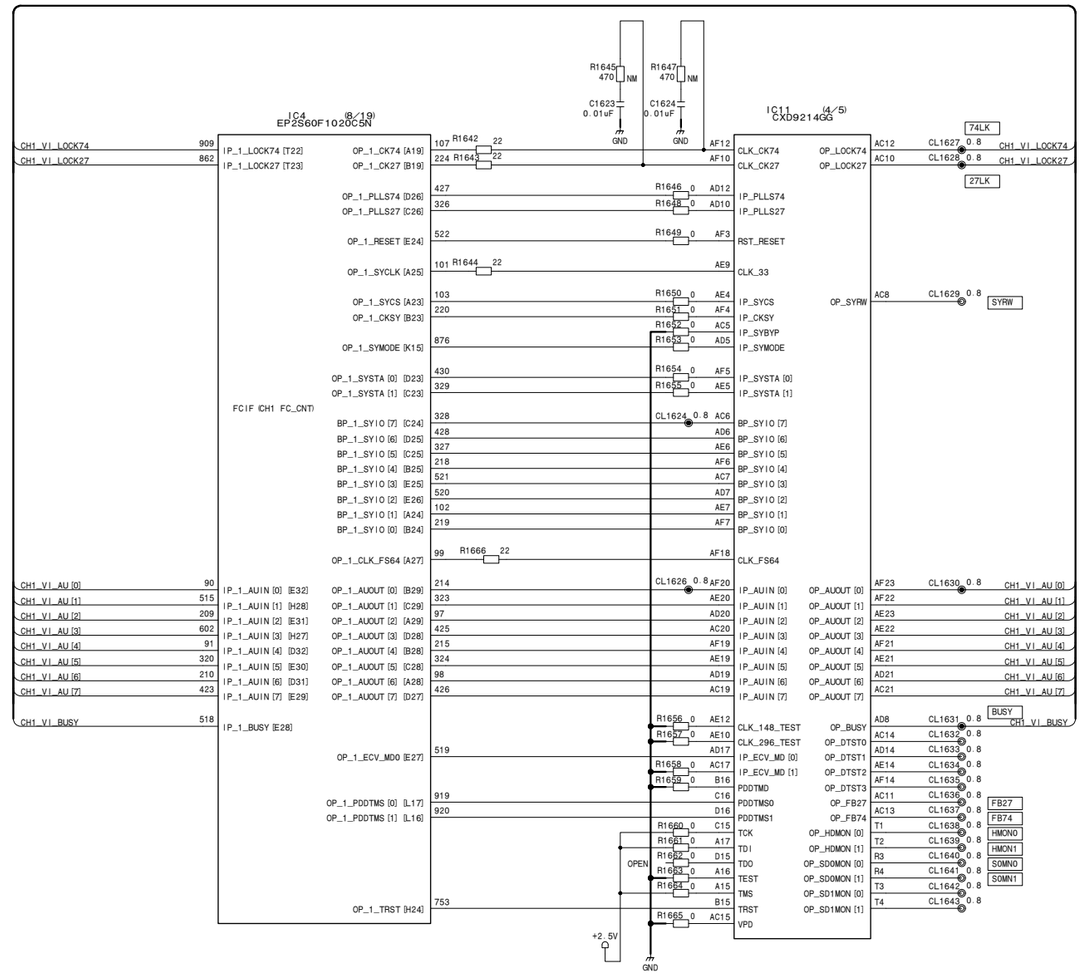

Format Converter Board
FC-109 (16/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_16


Virtual Module

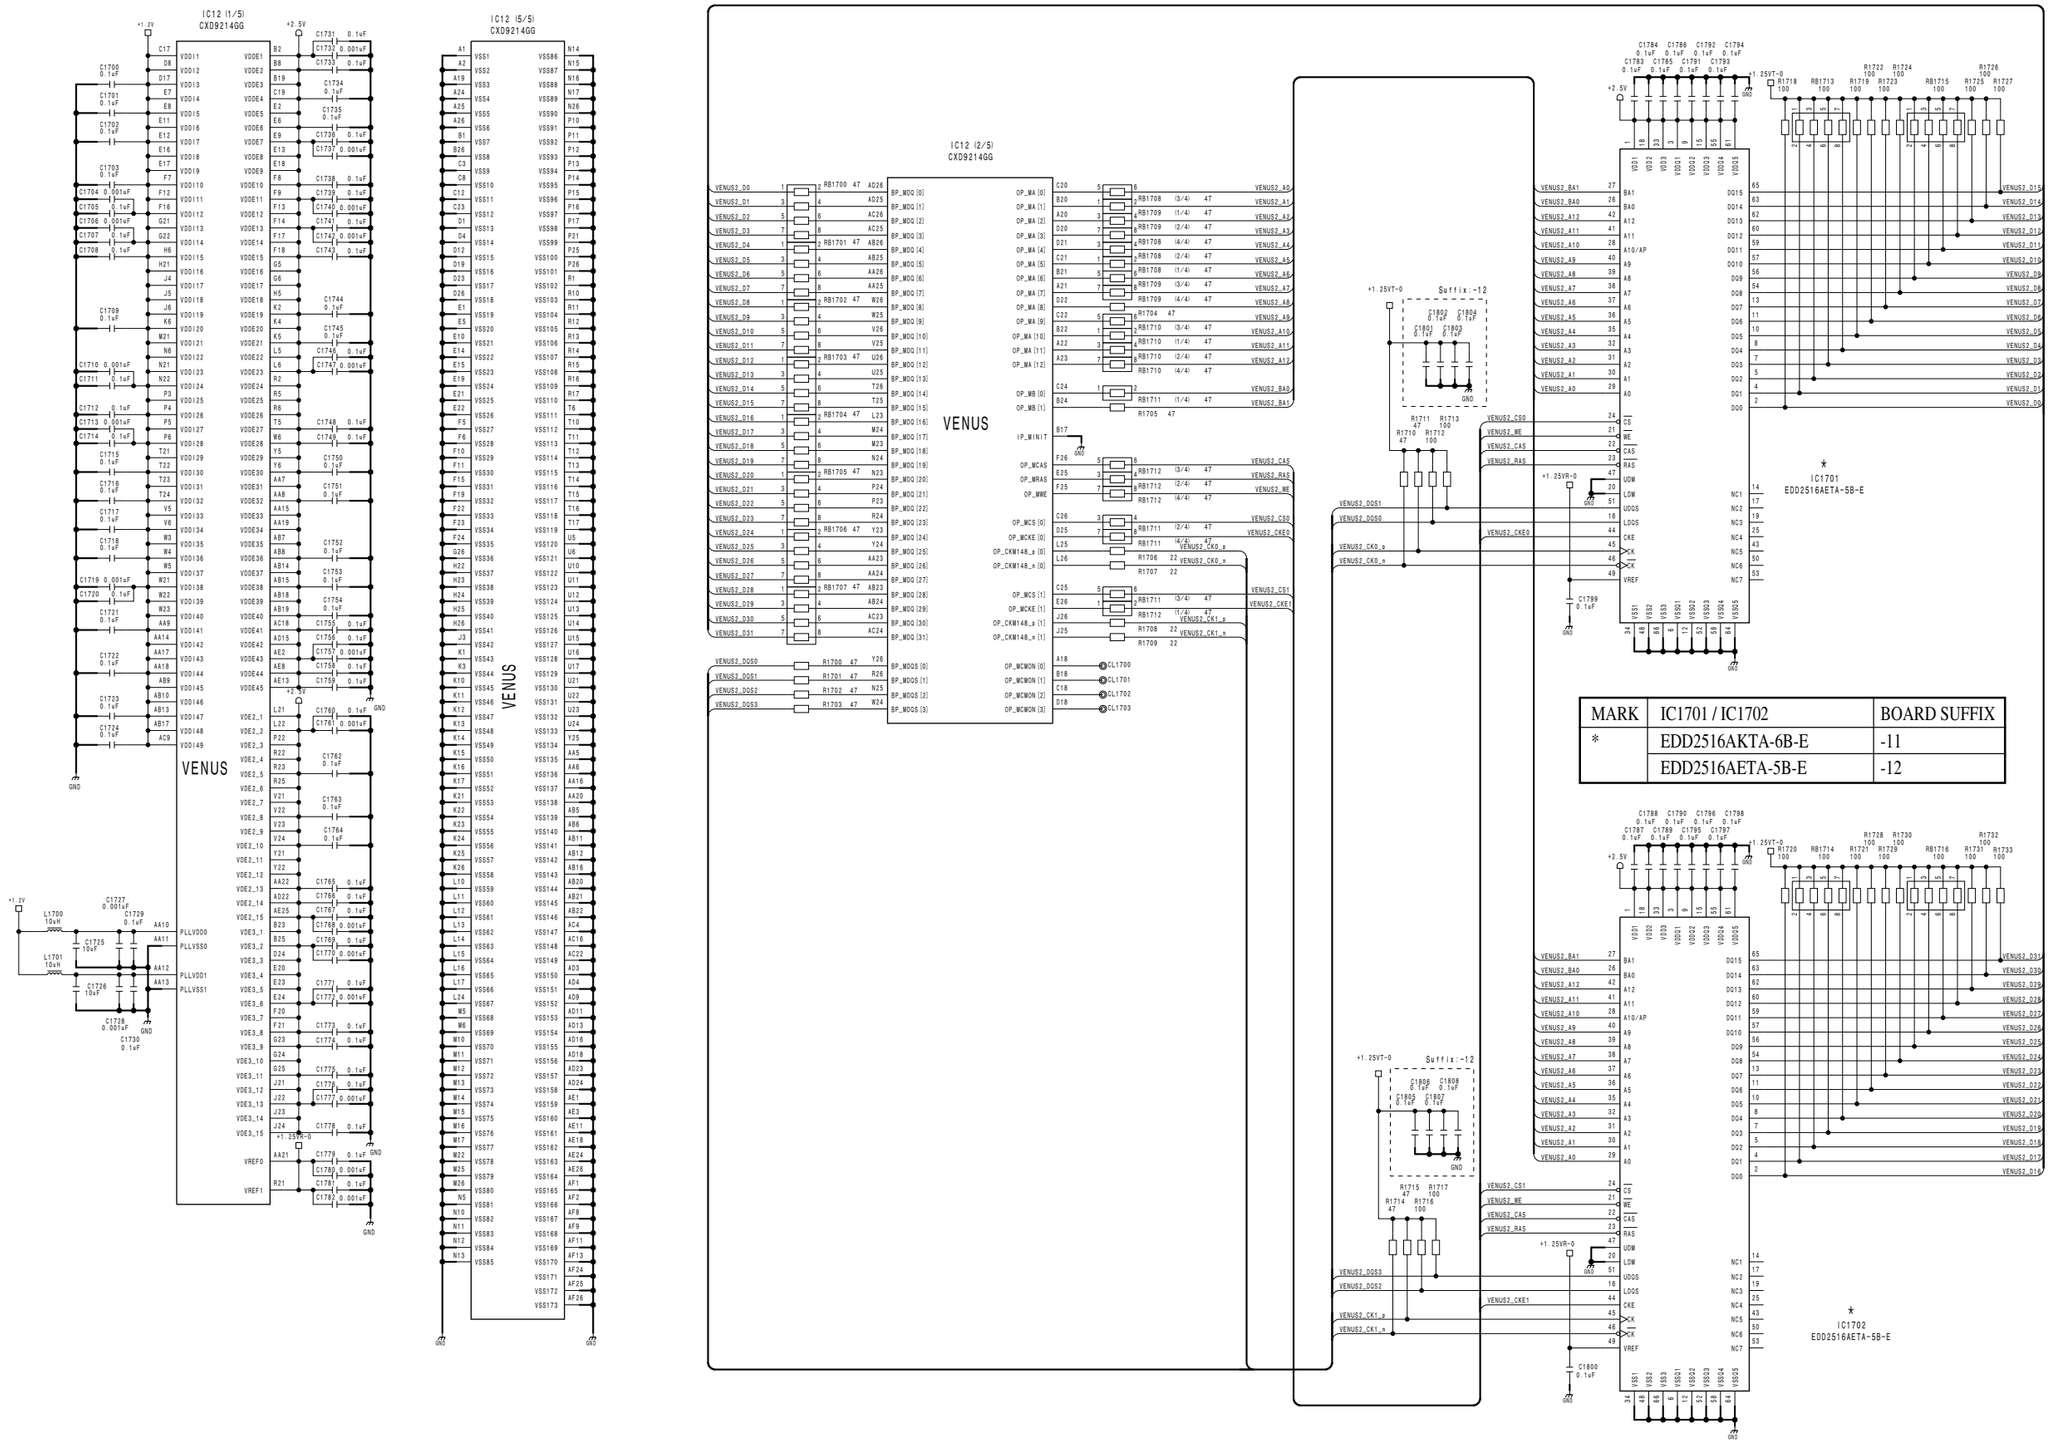


MARK	IC1701 / IC1702	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12

Format Converter Board
FC-109 (17/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_17


FC-109 (18/34)
SUFFIX: -11, -12

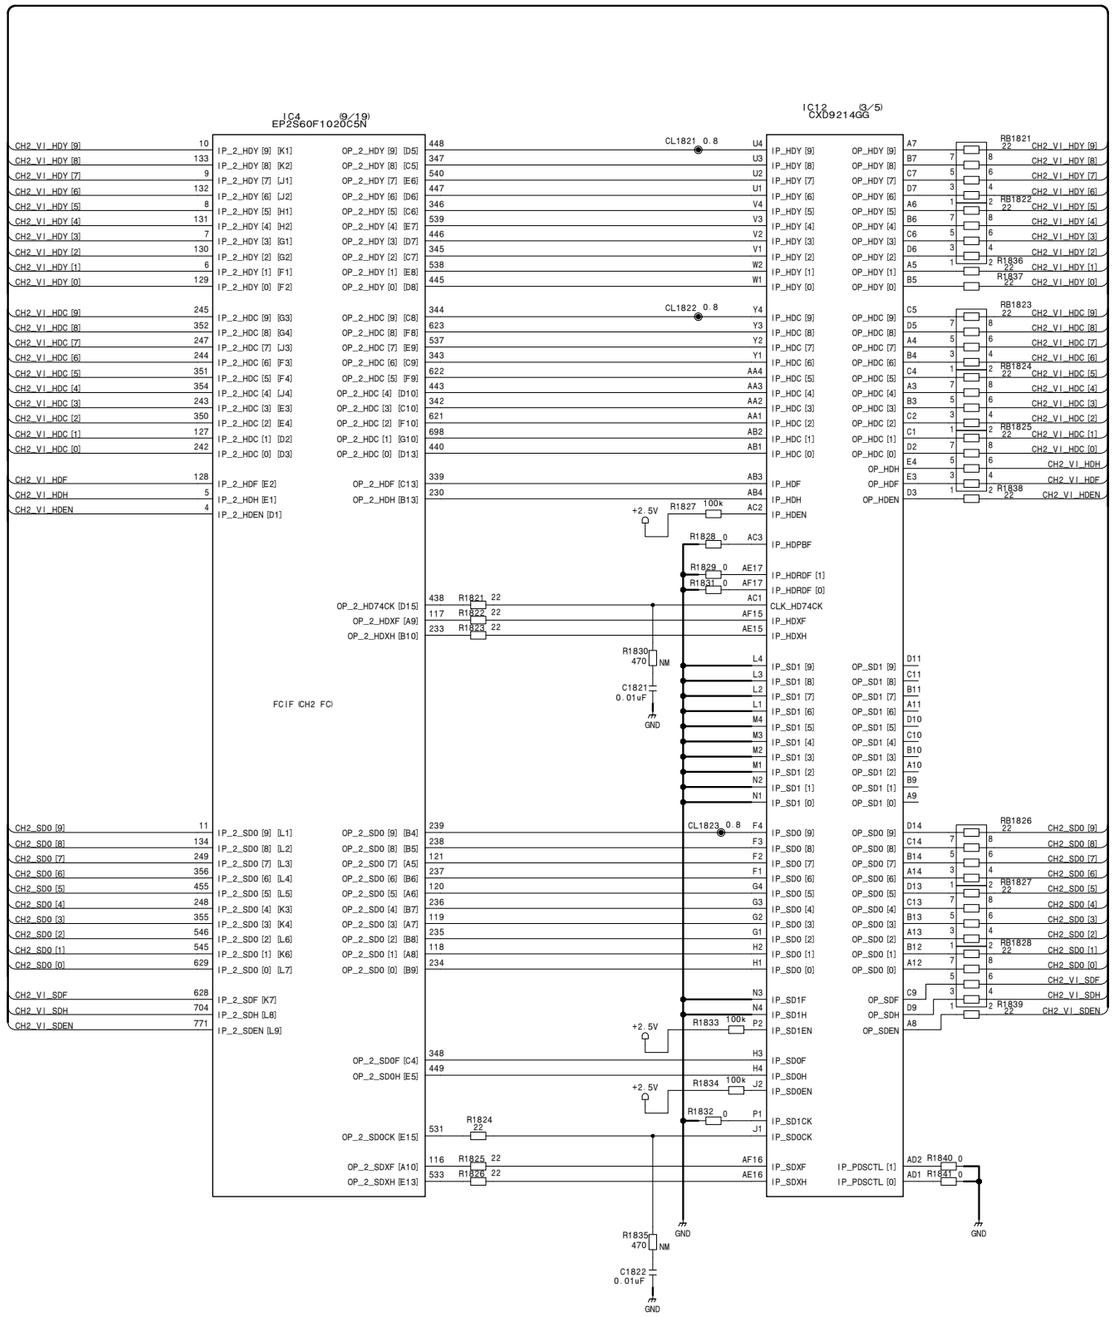

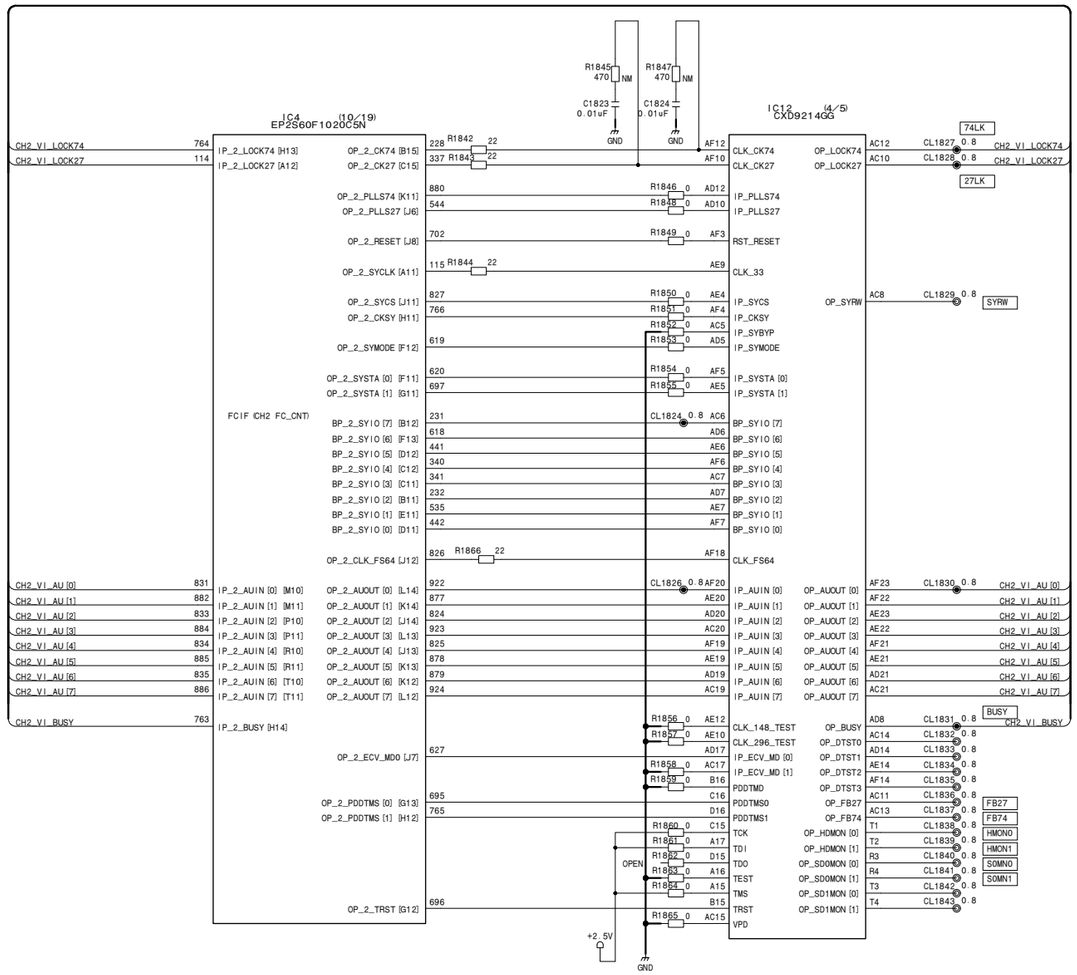

Format Converter Board
FC-109 (18/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_18


Virtual Module

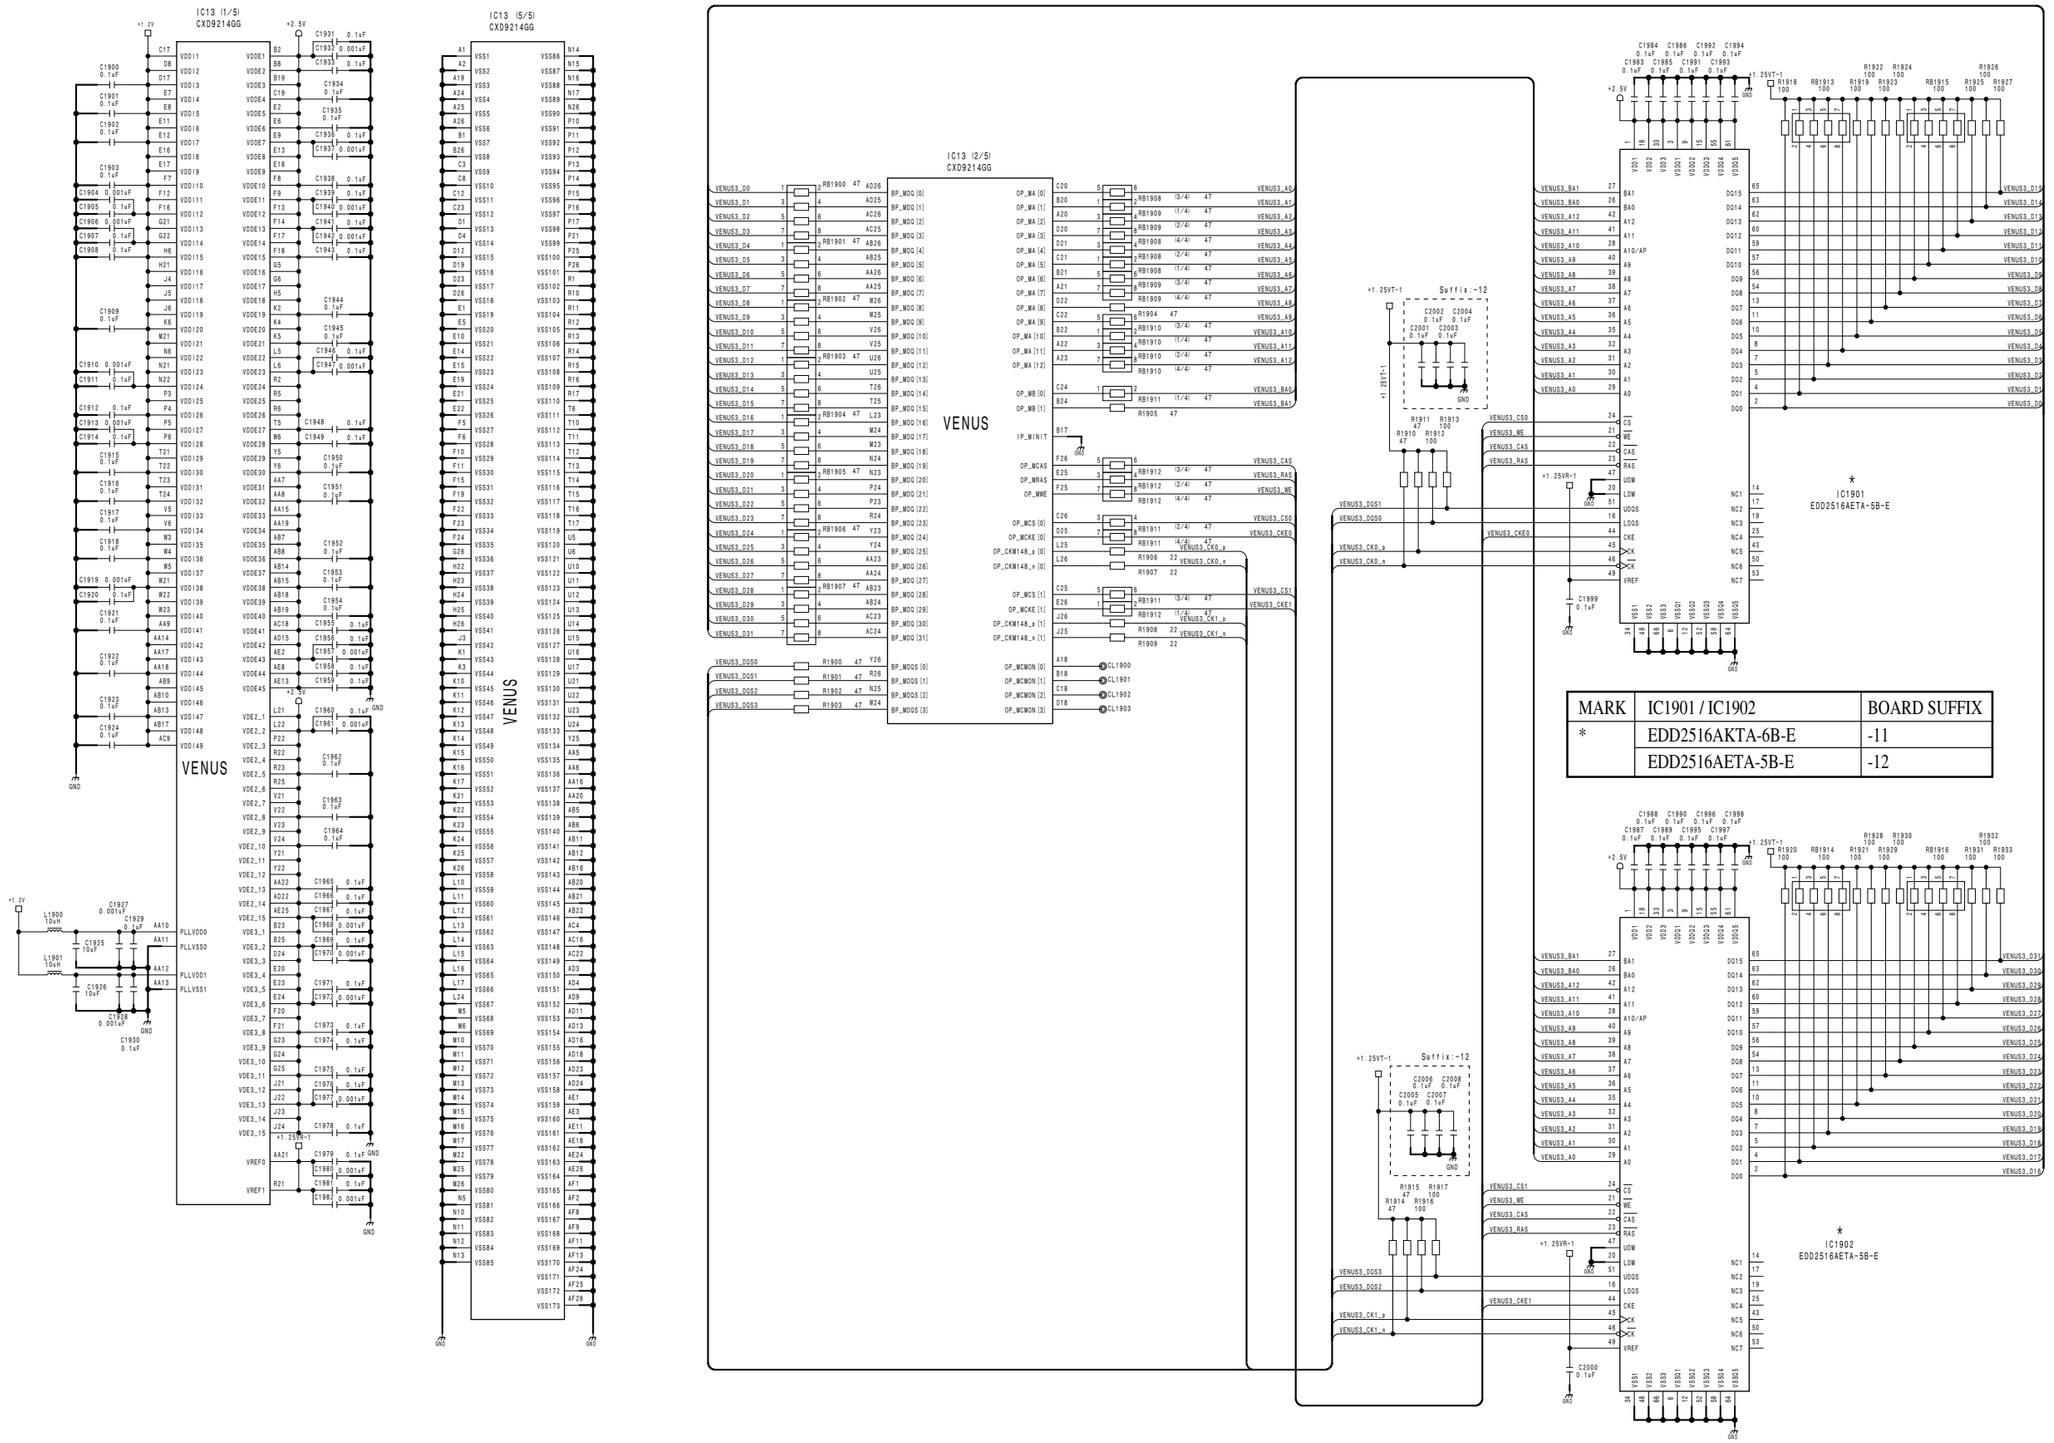


MARK	IC1901 / IC1902	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12

Format Converter Board
FC-109 (19/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_19


FC-109 (20/34)
SUFFIX: -11, -12

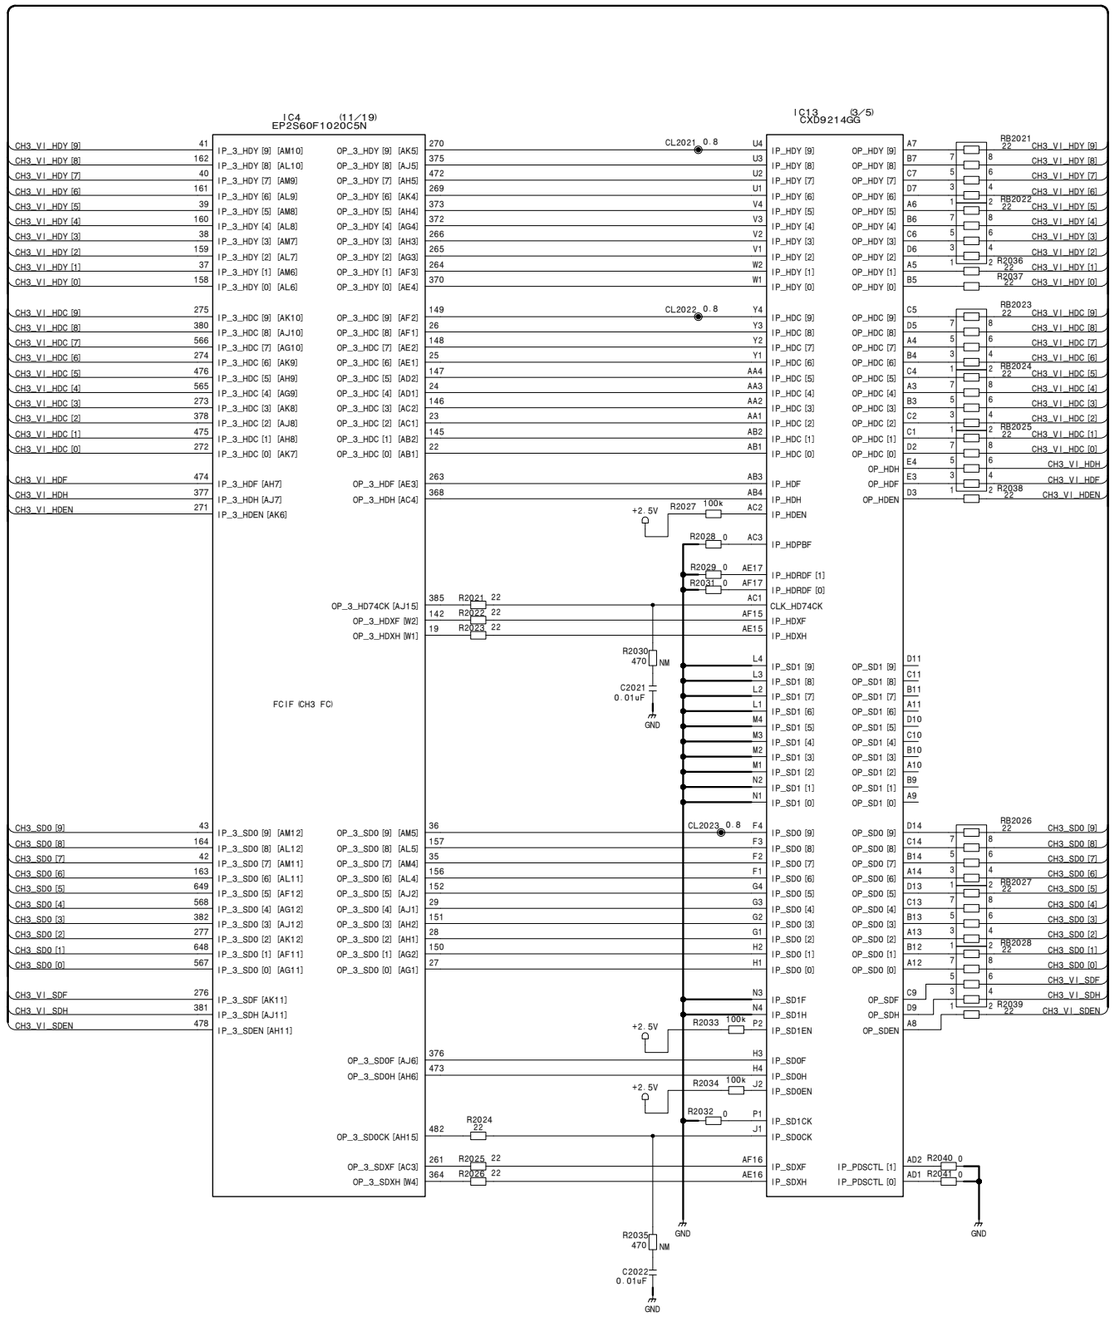

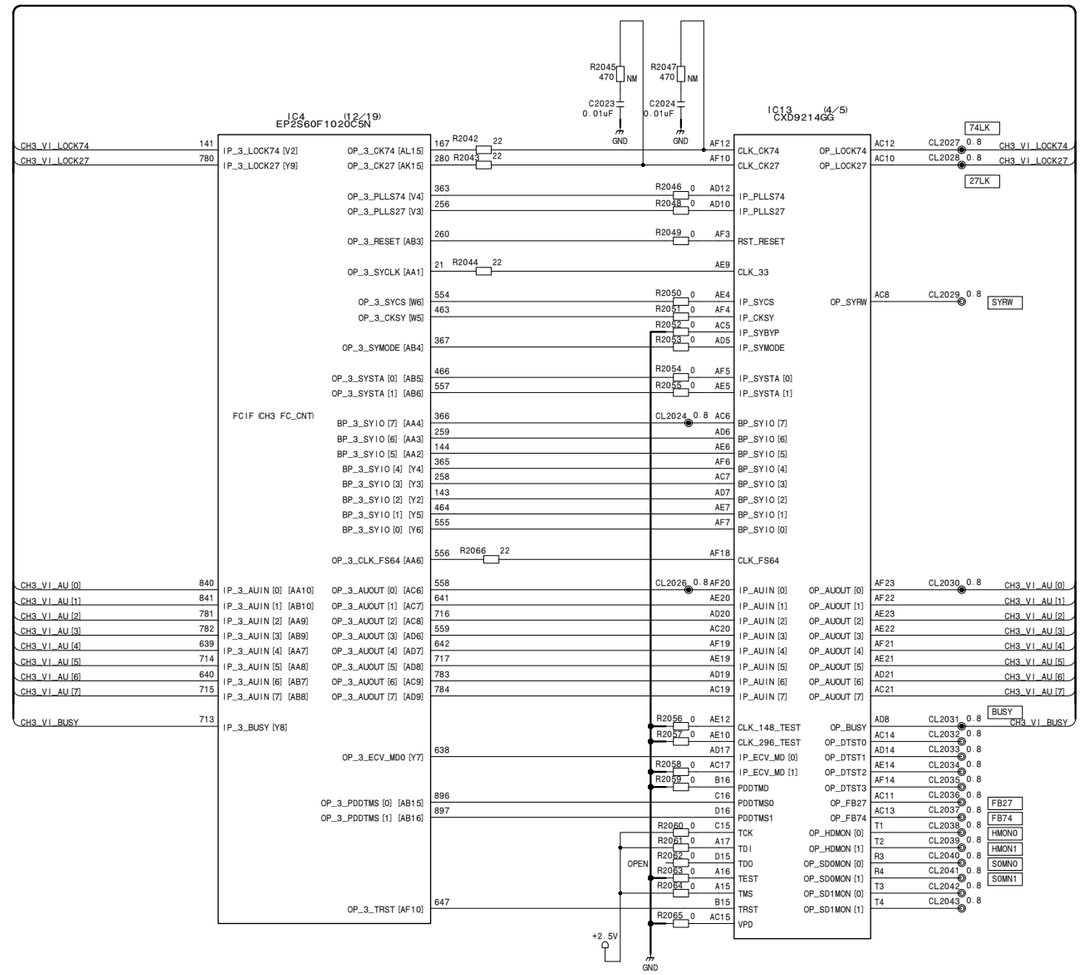

Format Converter Board
FC-109 (20/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_20


Virtual Module

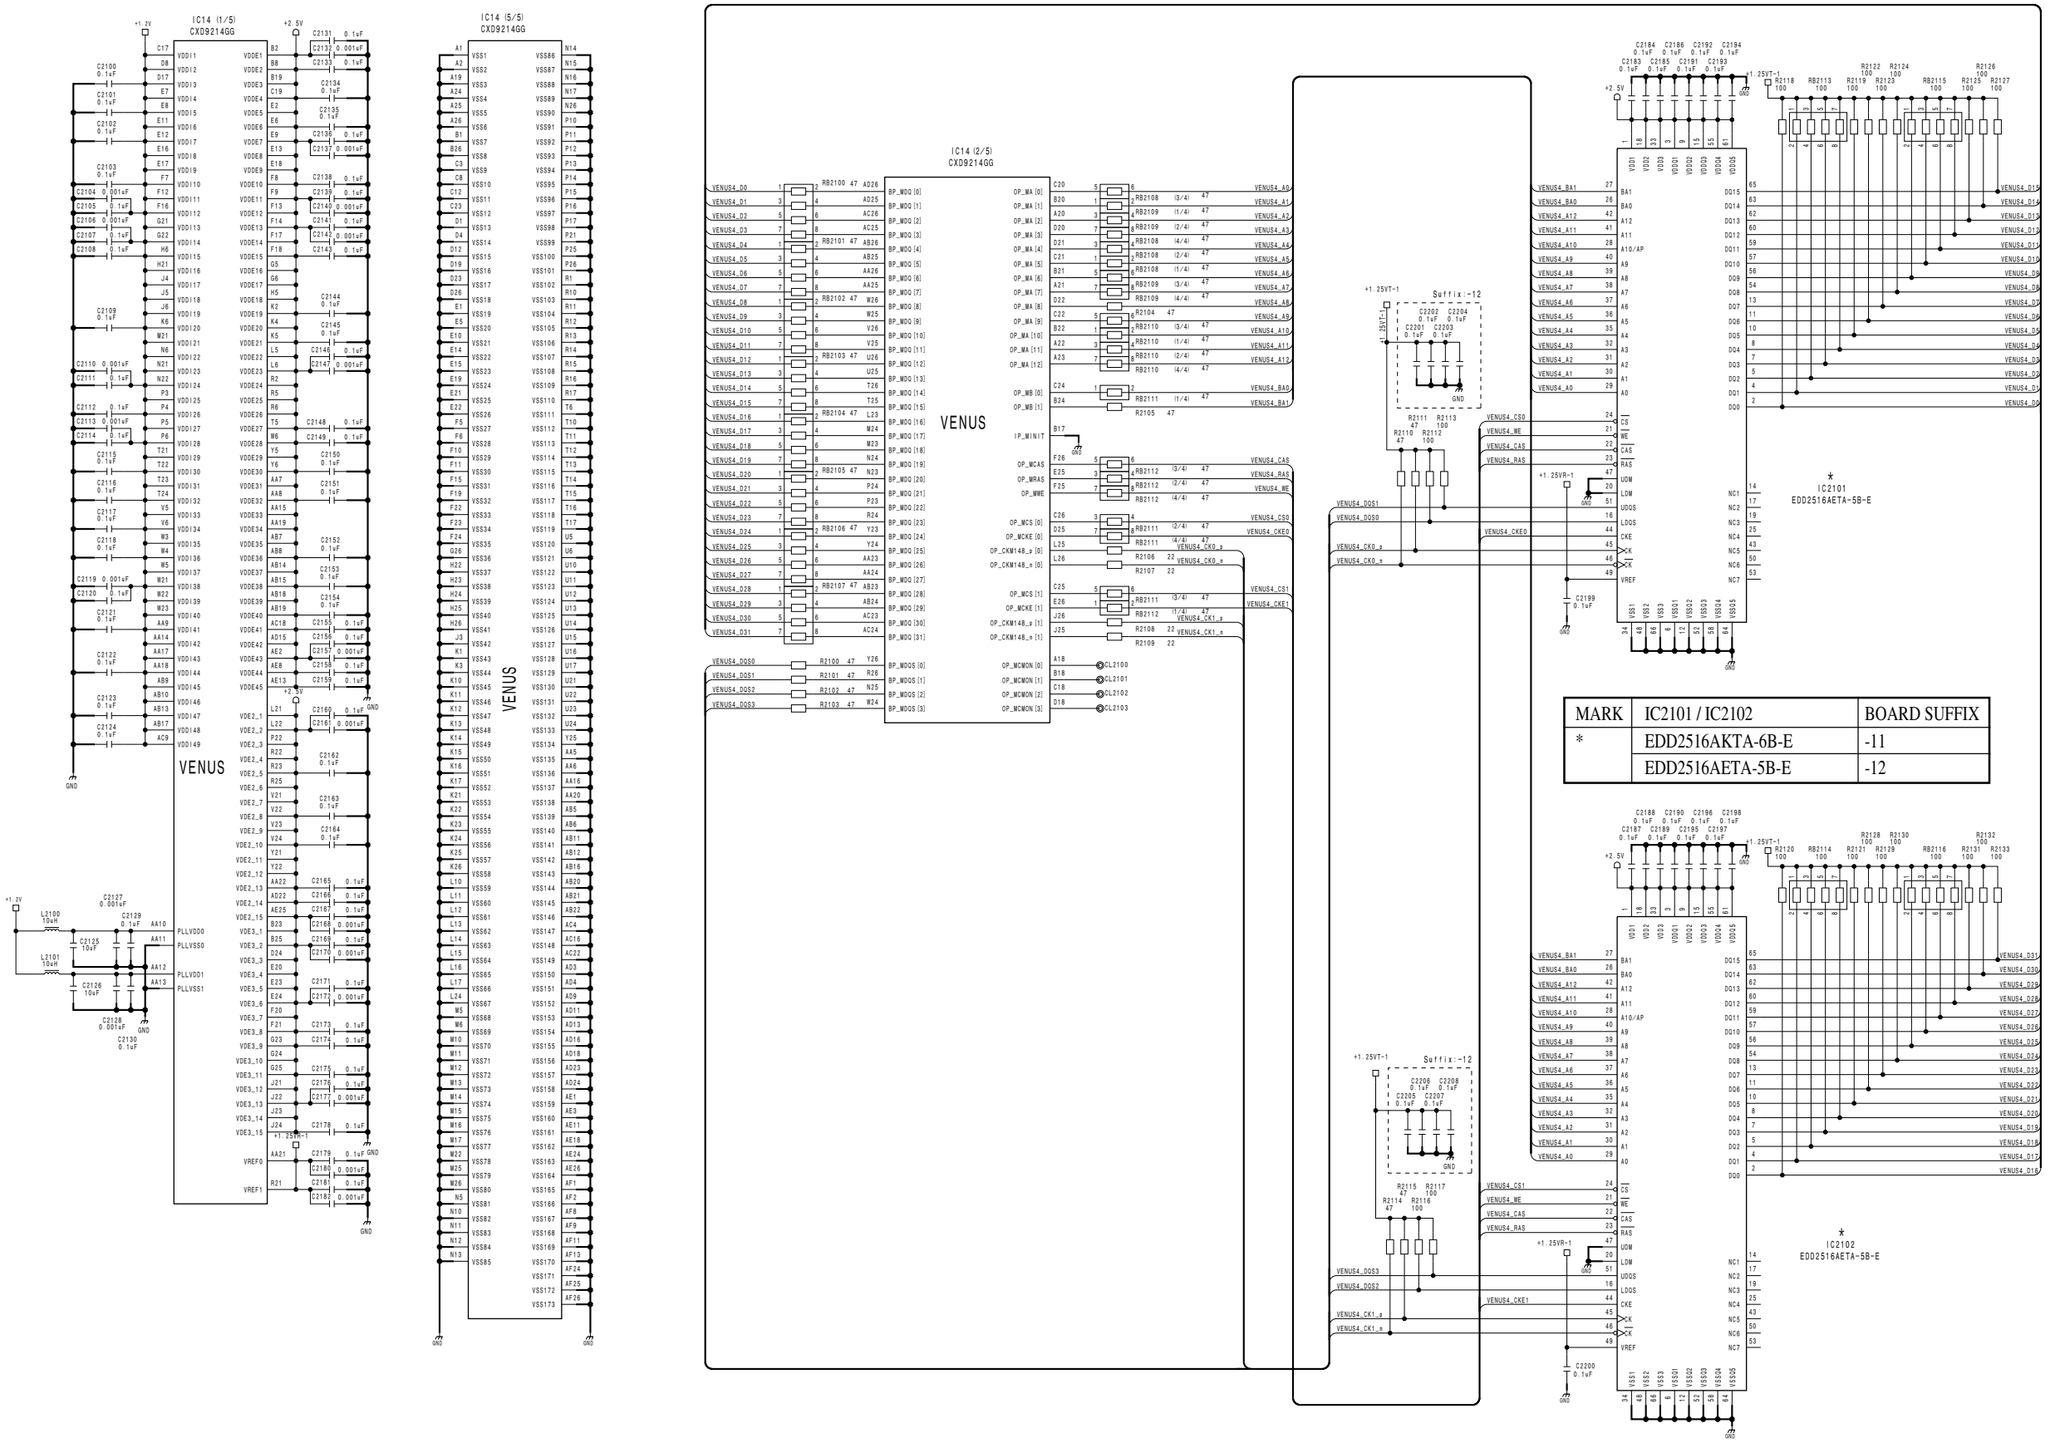


MARK	IC2101 / IC2102	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12

Format Converter Board
FC-109 (21/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_21


FC-109 (22/34)
SUFFIX: -11, -12

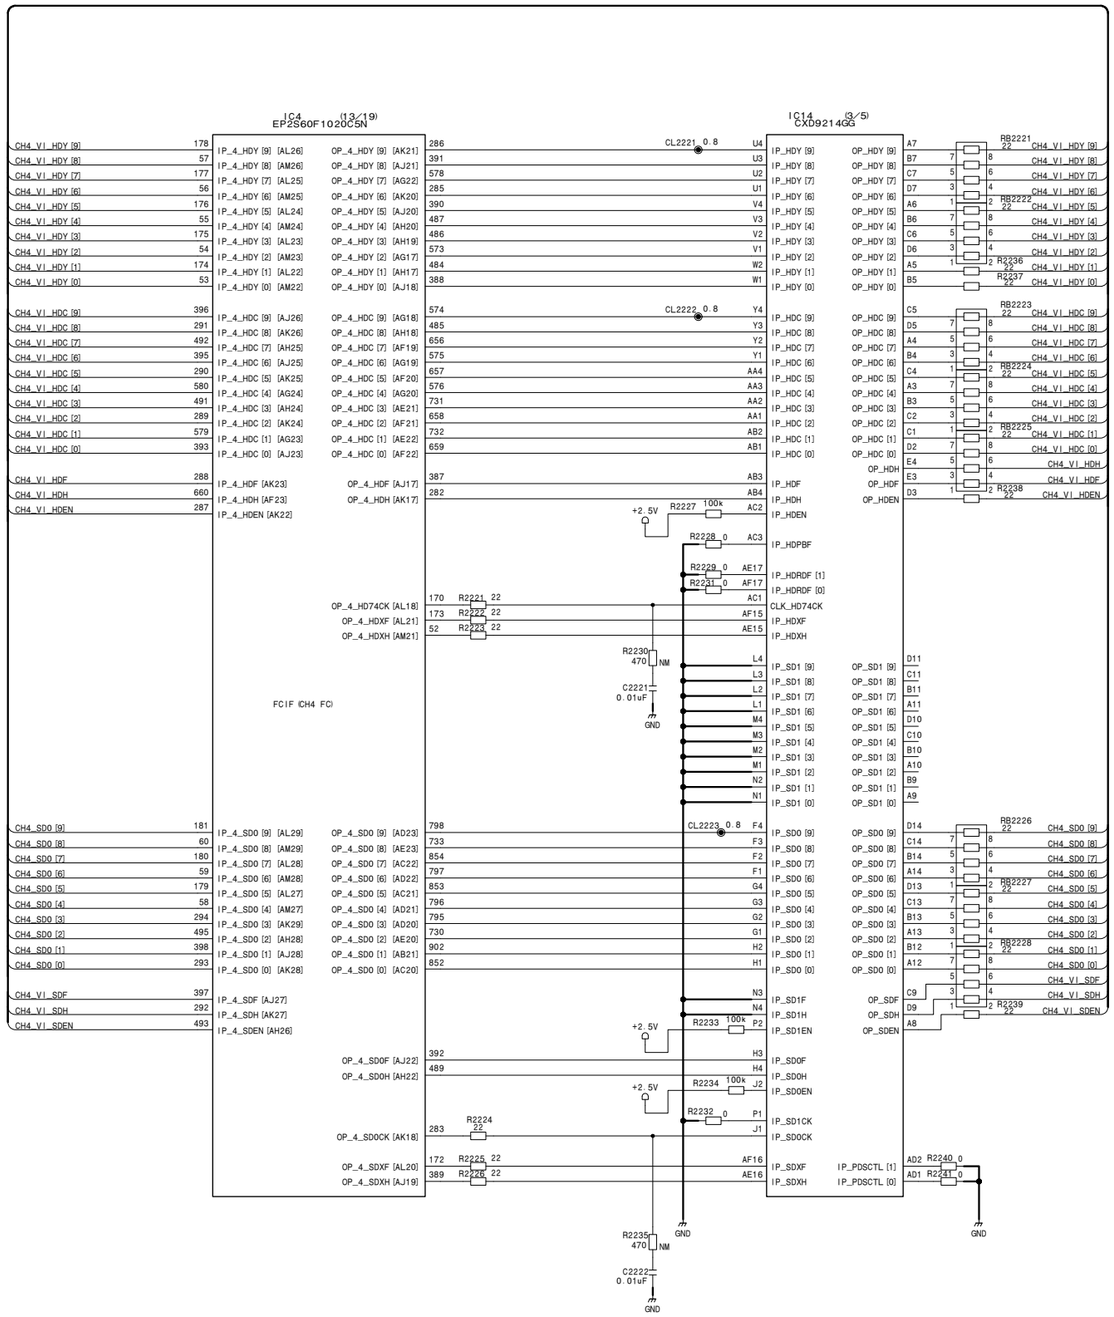

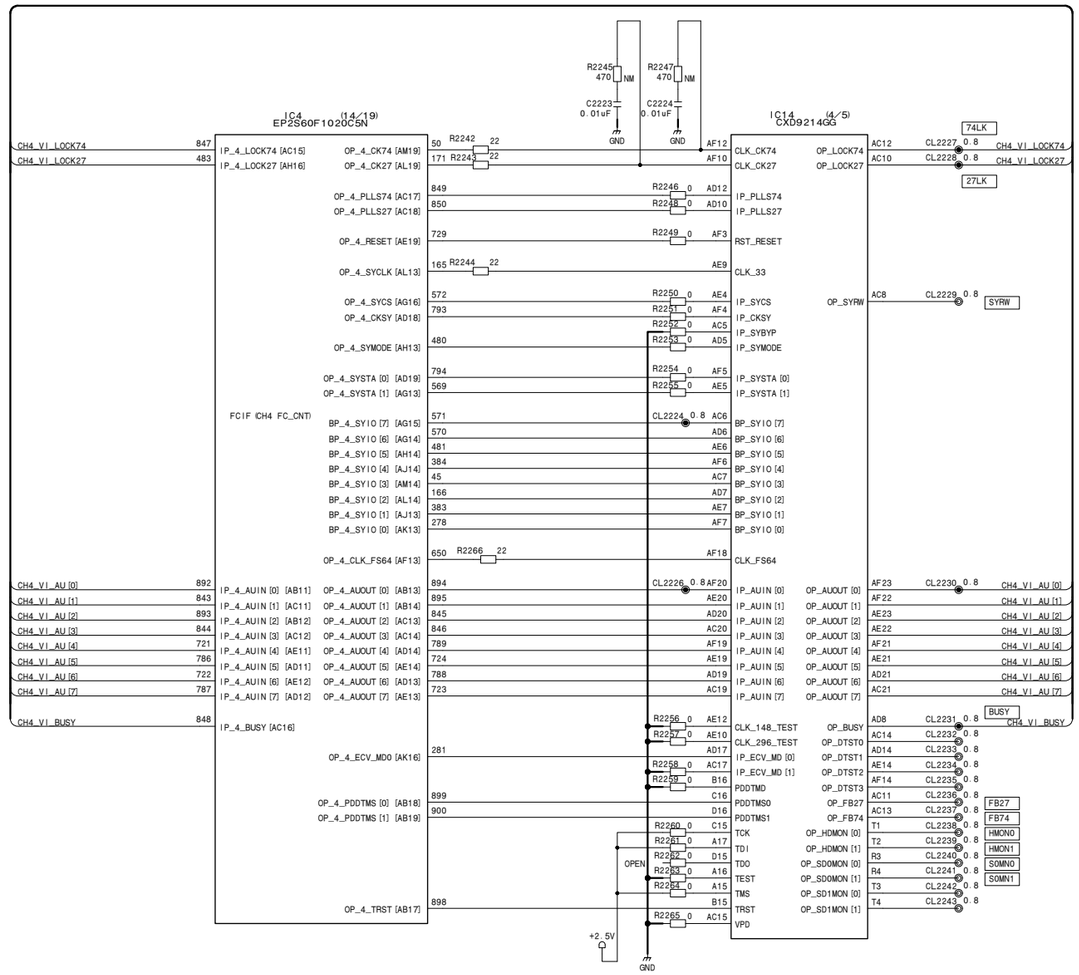


Format Converter Board
FC-109 (22/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_22


Virtual Module

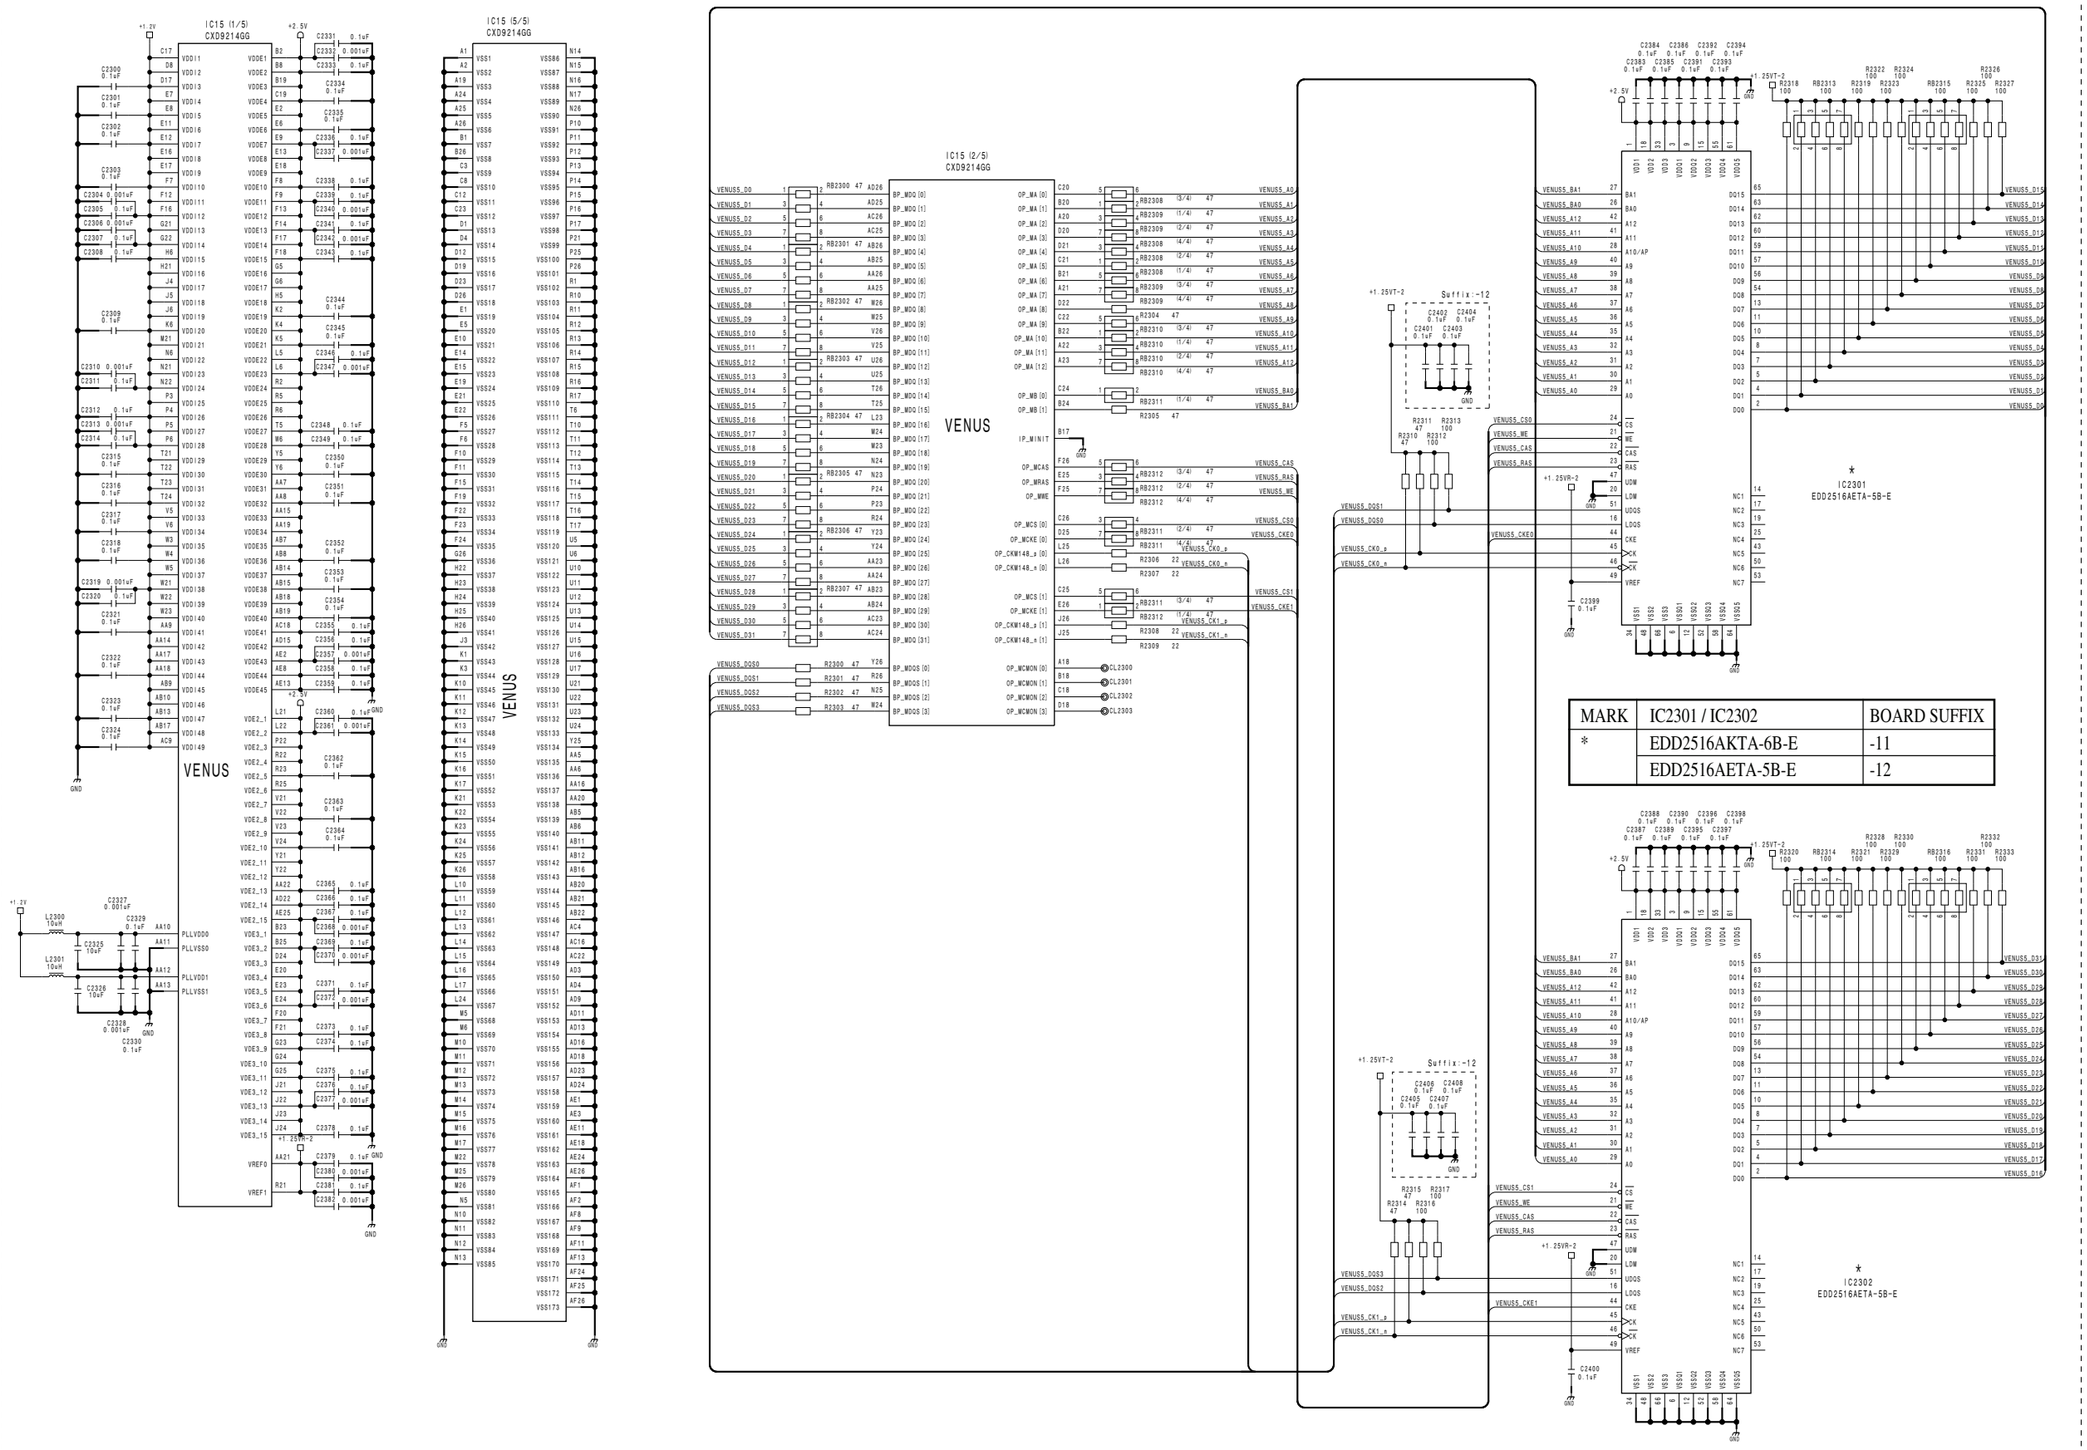

Format Converter Board
FC-109 (23/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_23


FC-109 (24/34)
SUFFIX: -11, -12

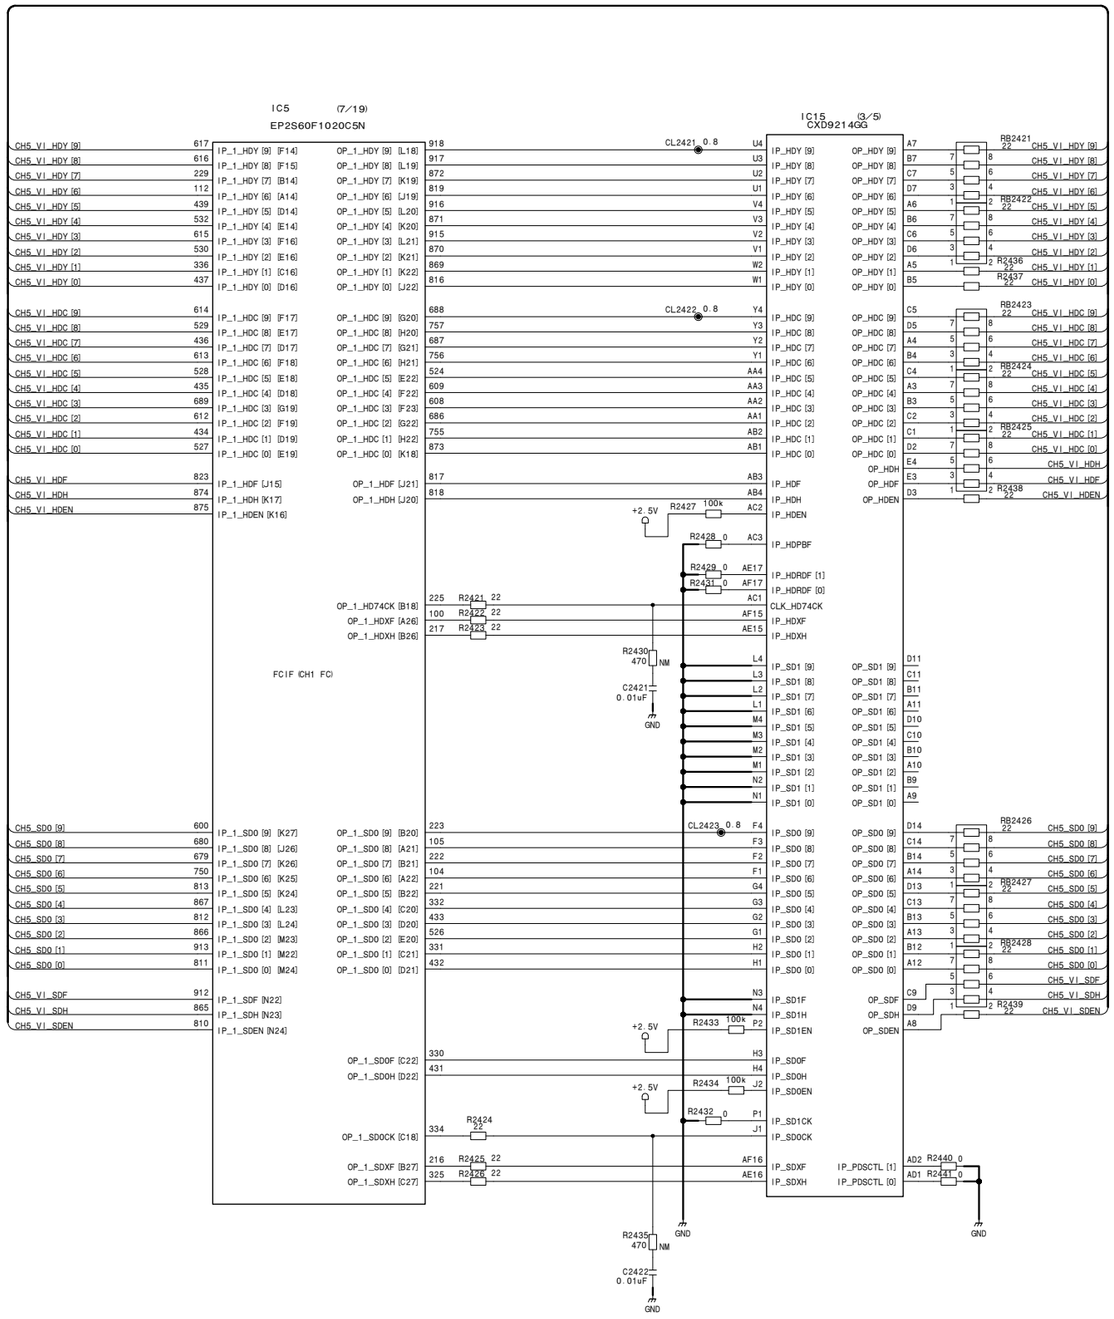


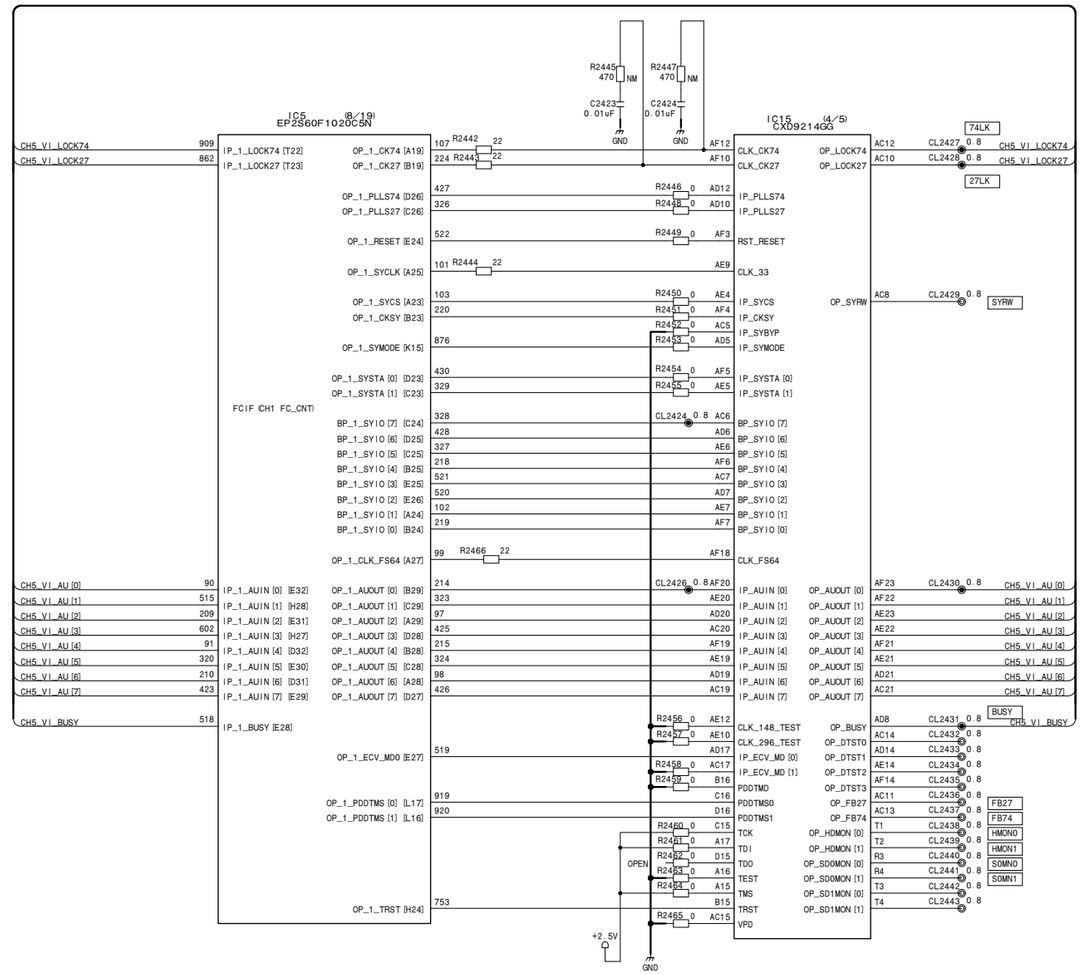

Format Converter Board
FC-109 (24/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_24

Virtual Module

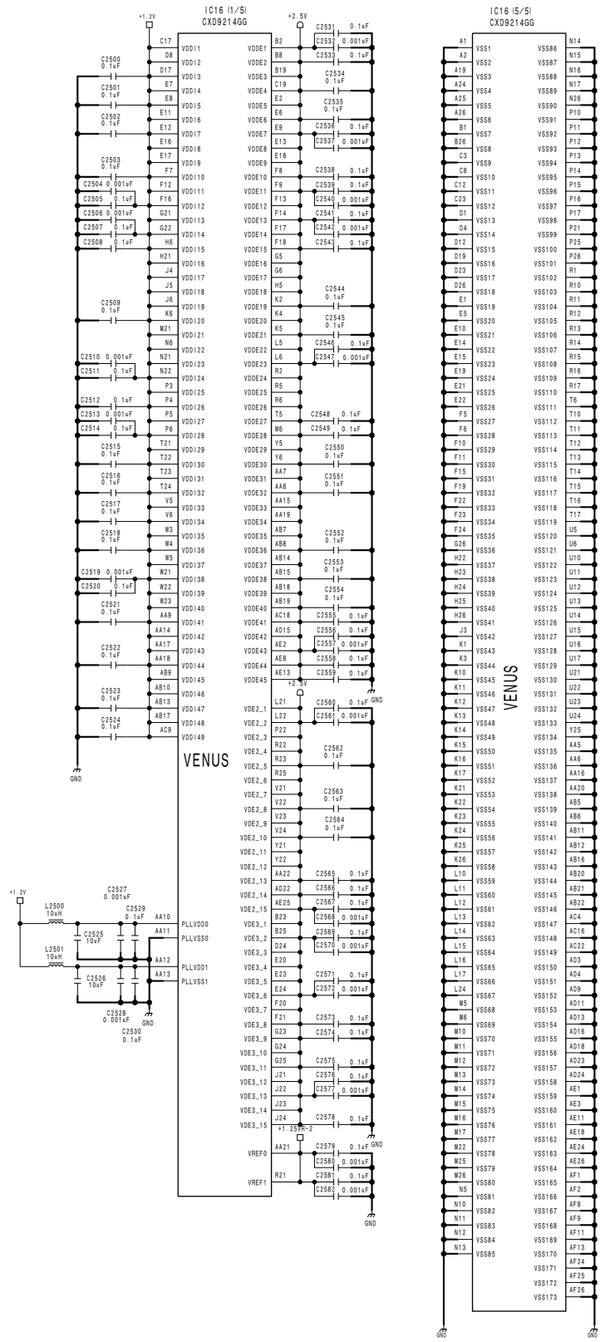


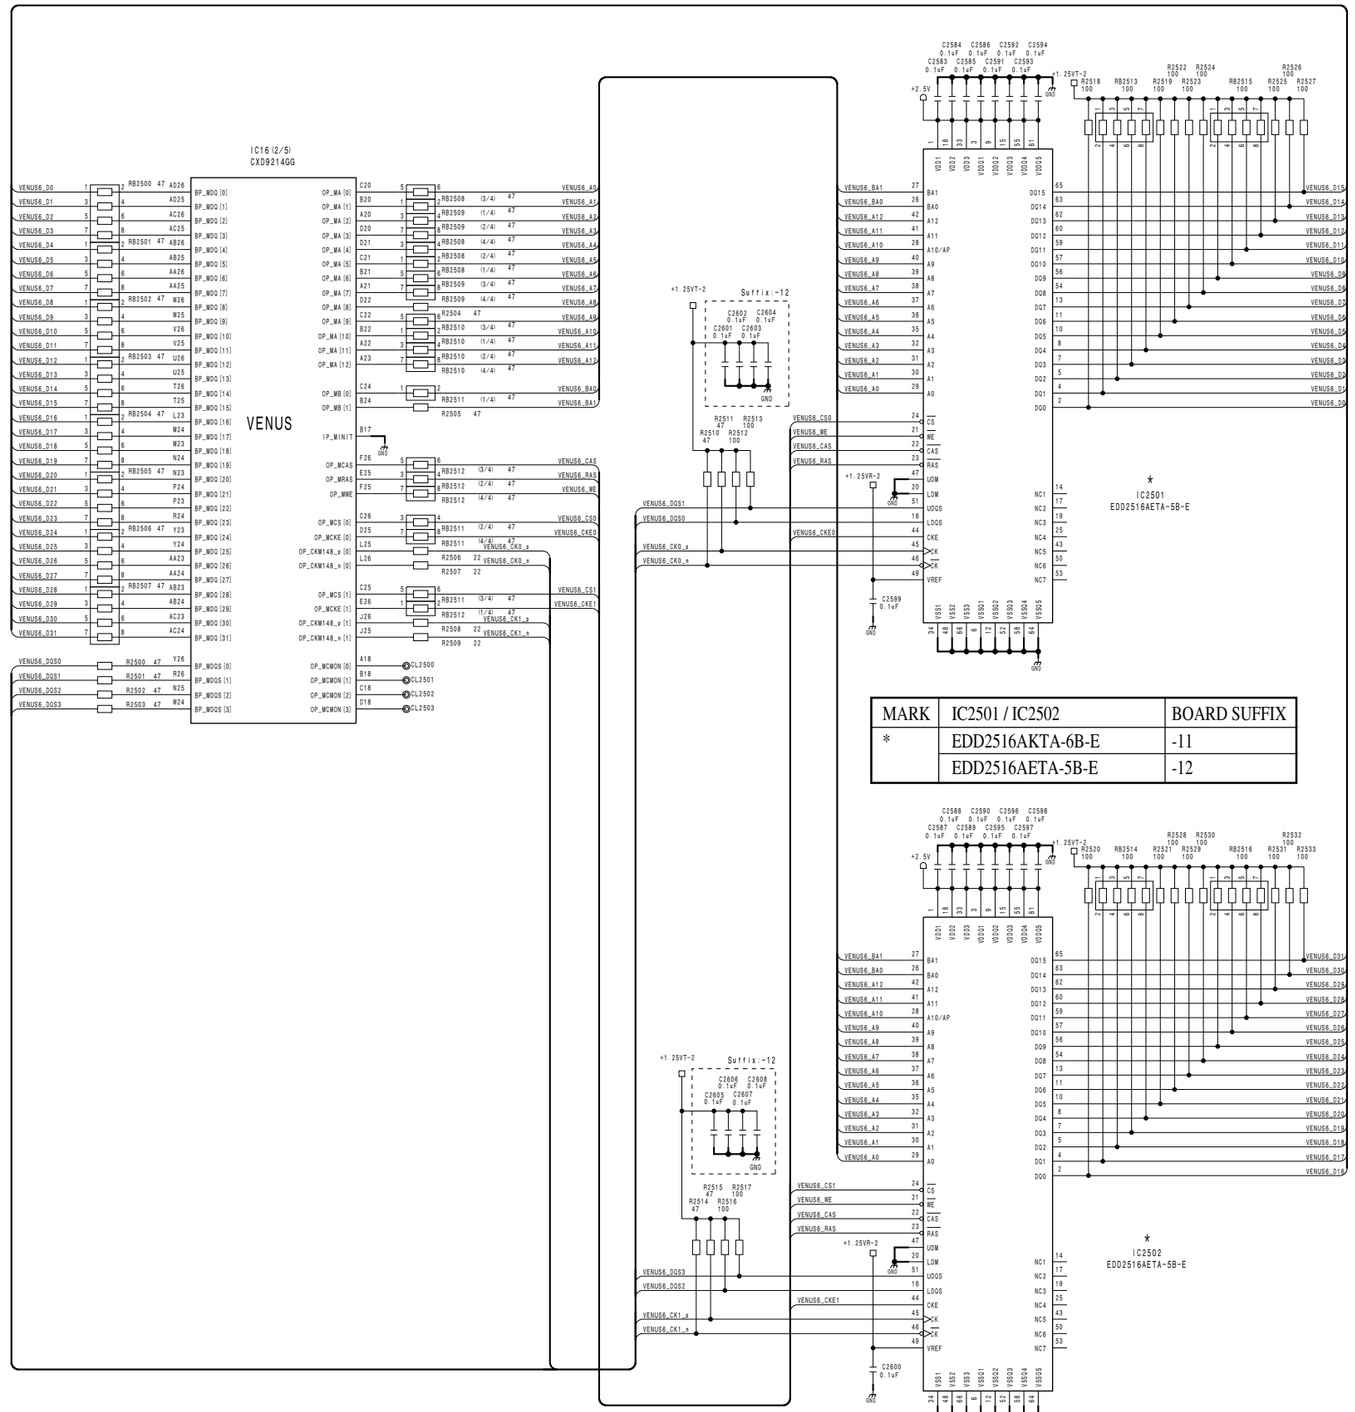


MARK	IC2501 / IC2502	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12

Format Converter Board
FC-109 (25/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_25


FC-109 (26/34)
SUFFIX: -11, -12

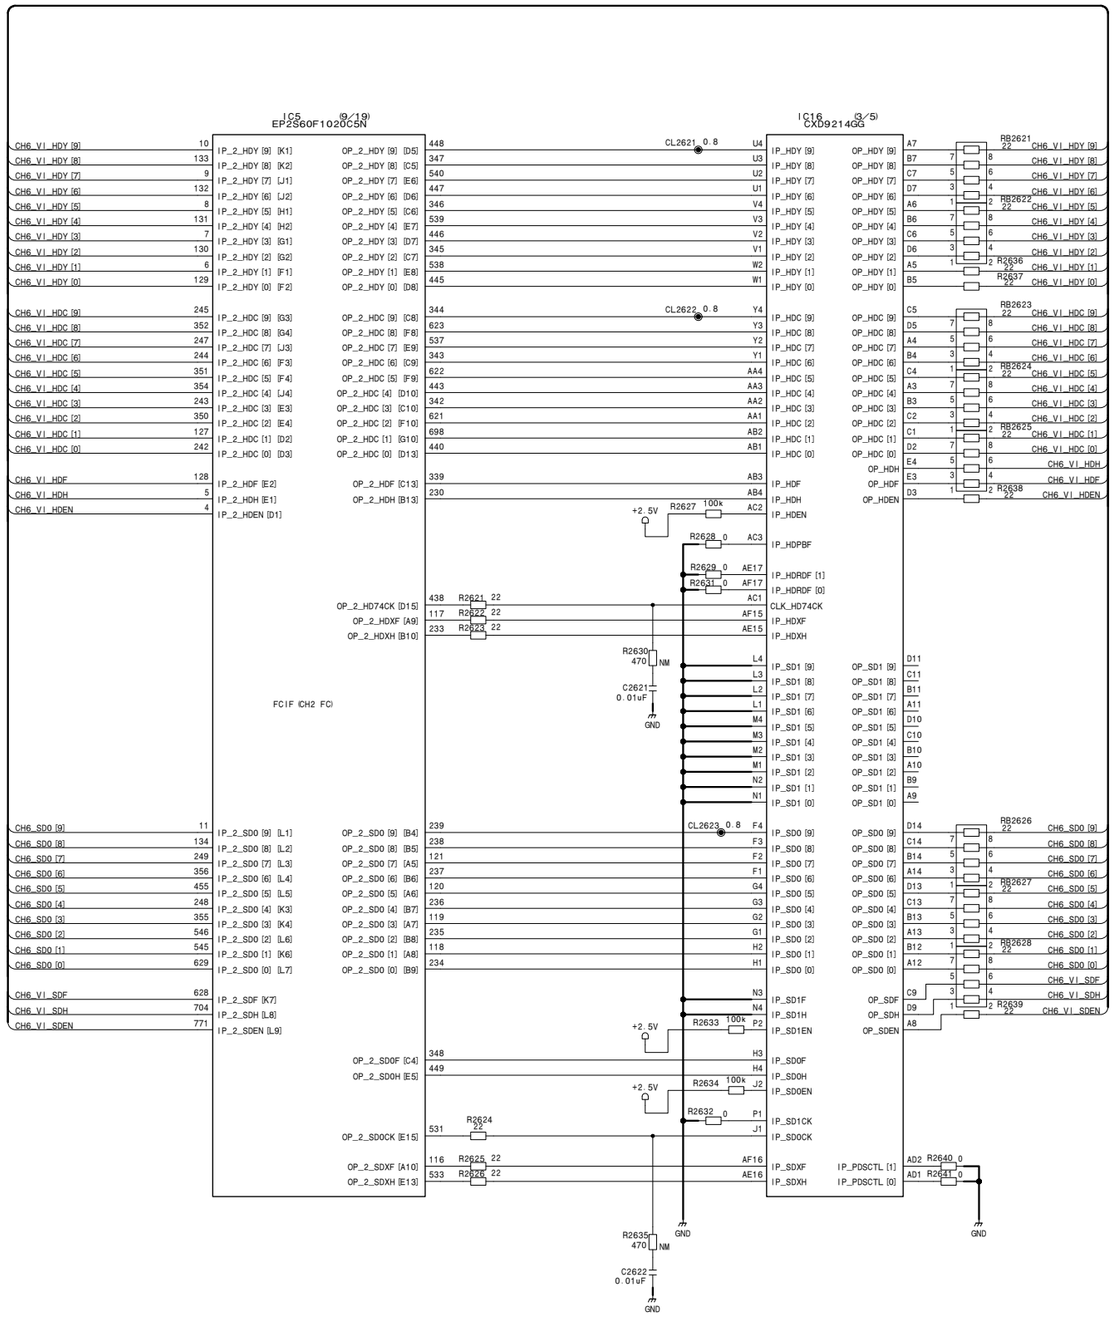

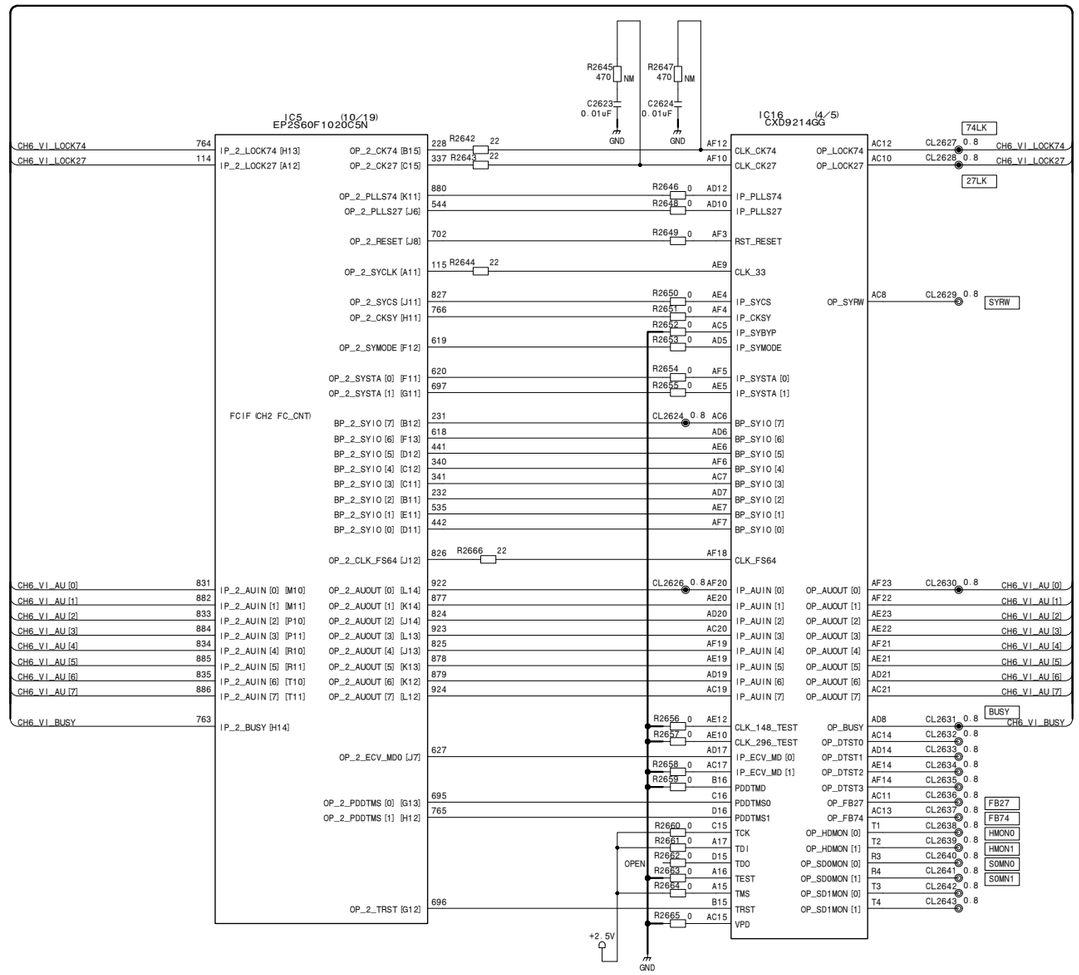

Format Converter Board
FC-109 (26/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_26


Virtual Module

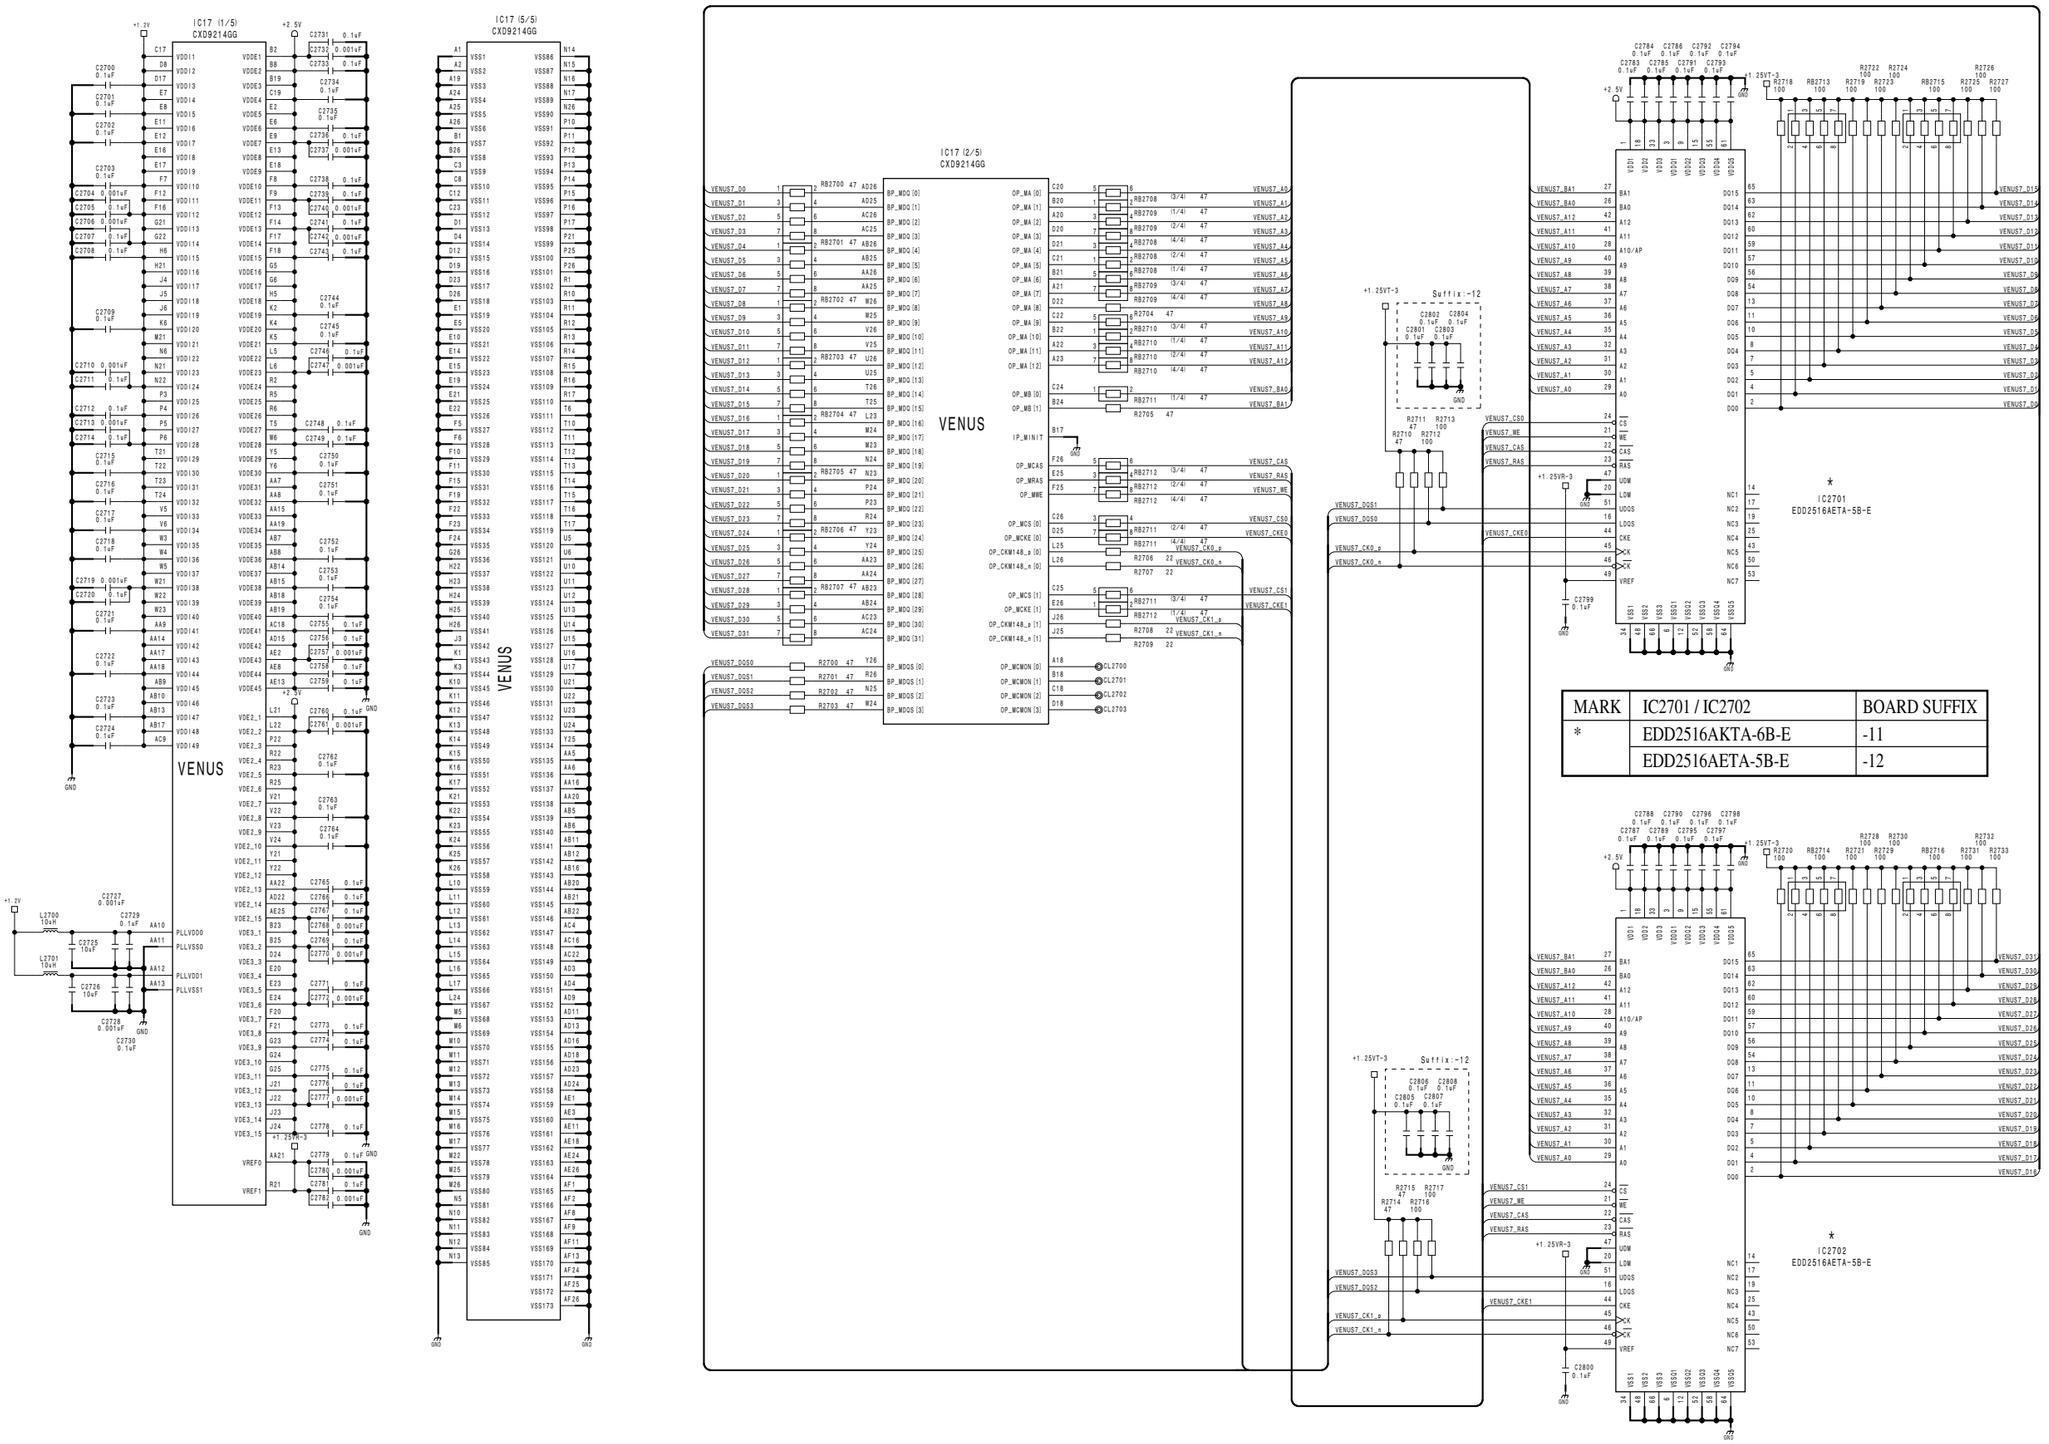


MARK	IC2701 / IC2702	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12

Format Converter Board
FC-109 (27/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_27


FC-109 (28/34)
SUFFIX: -11, -12

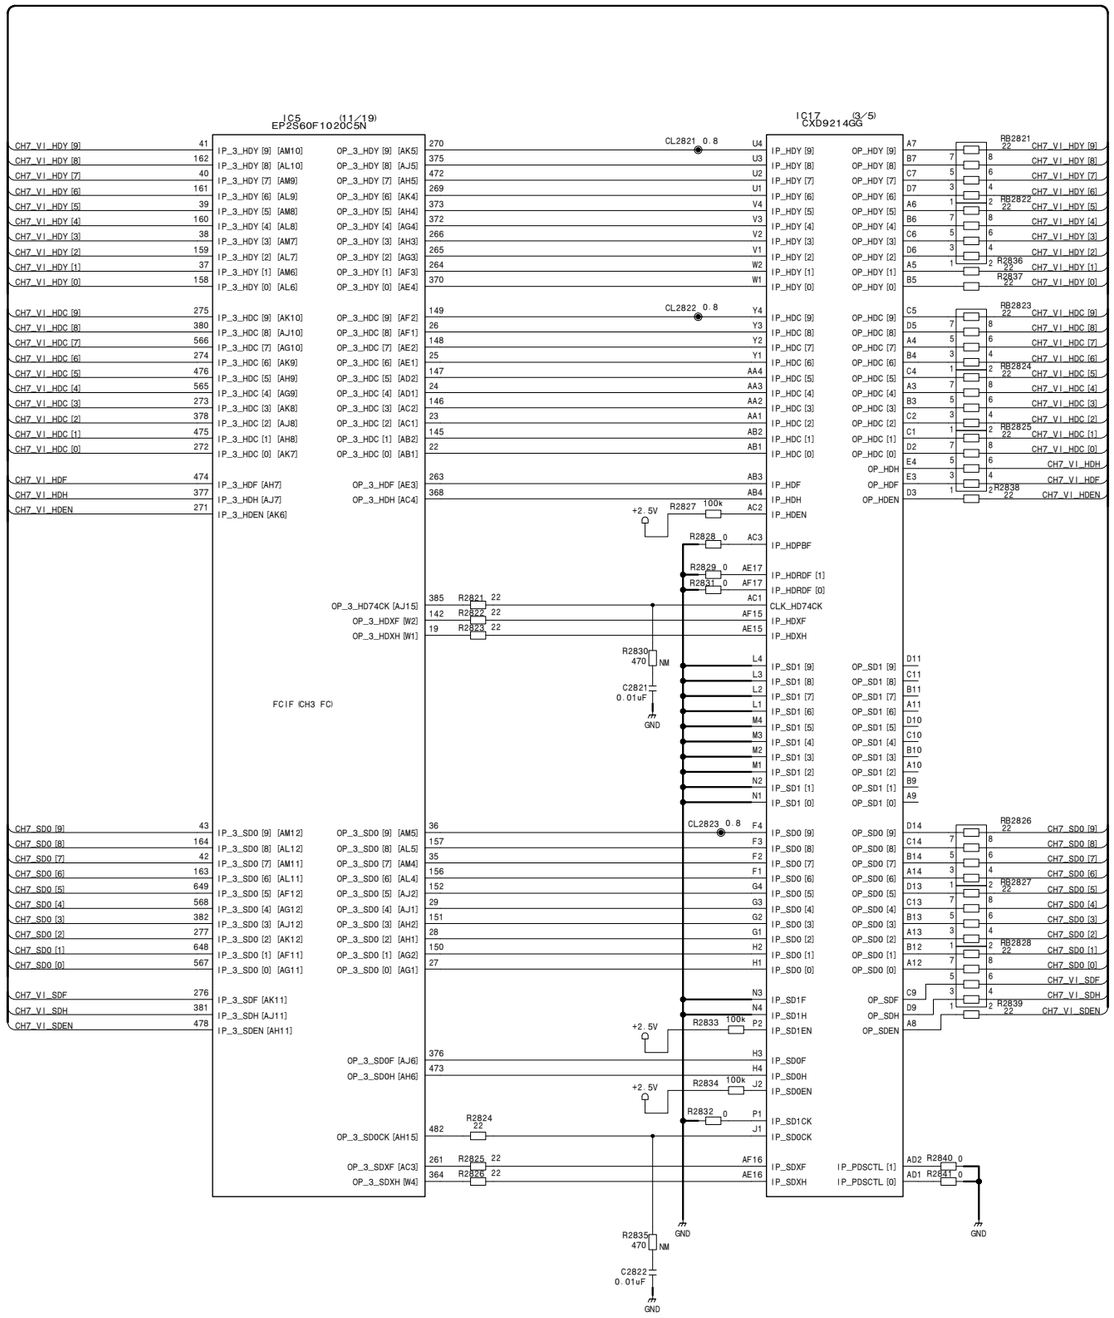

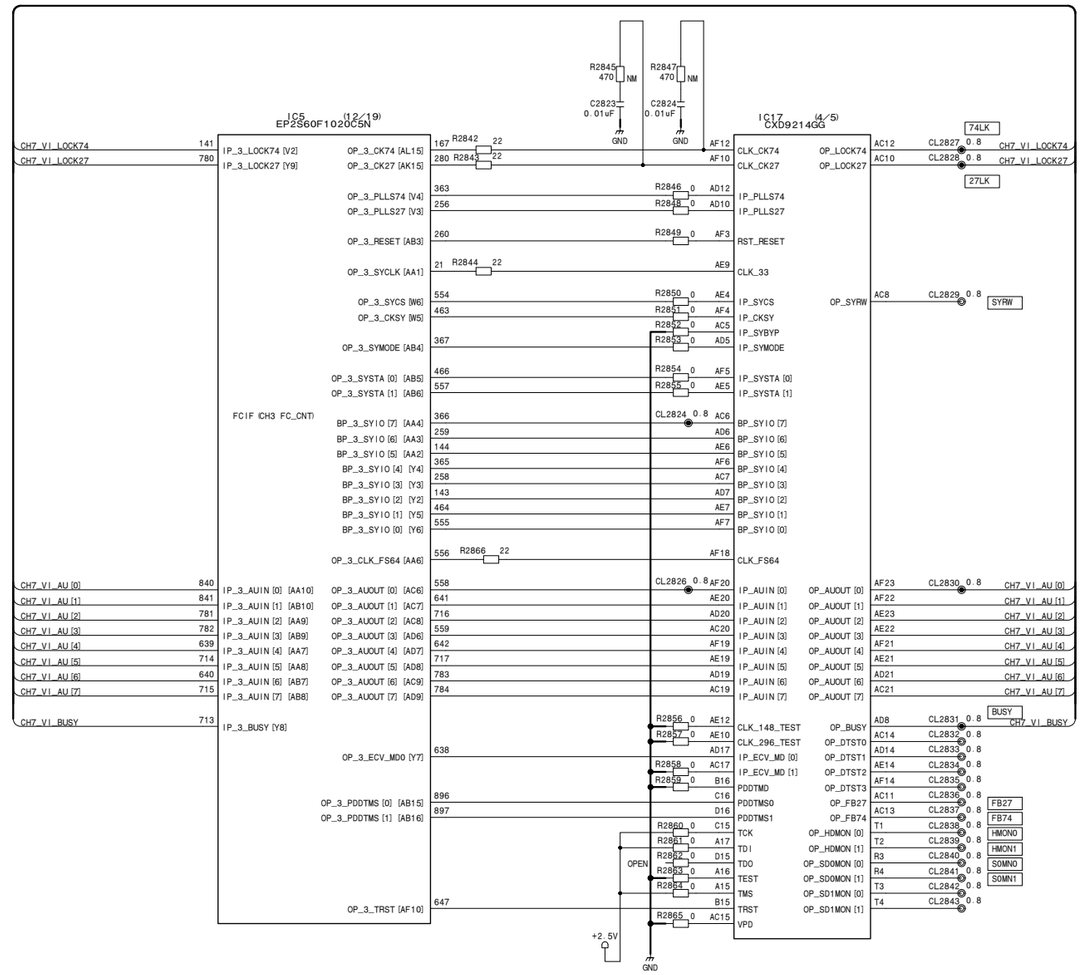

Format Converter Board
FC-109 (28/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_28


Virtual Module

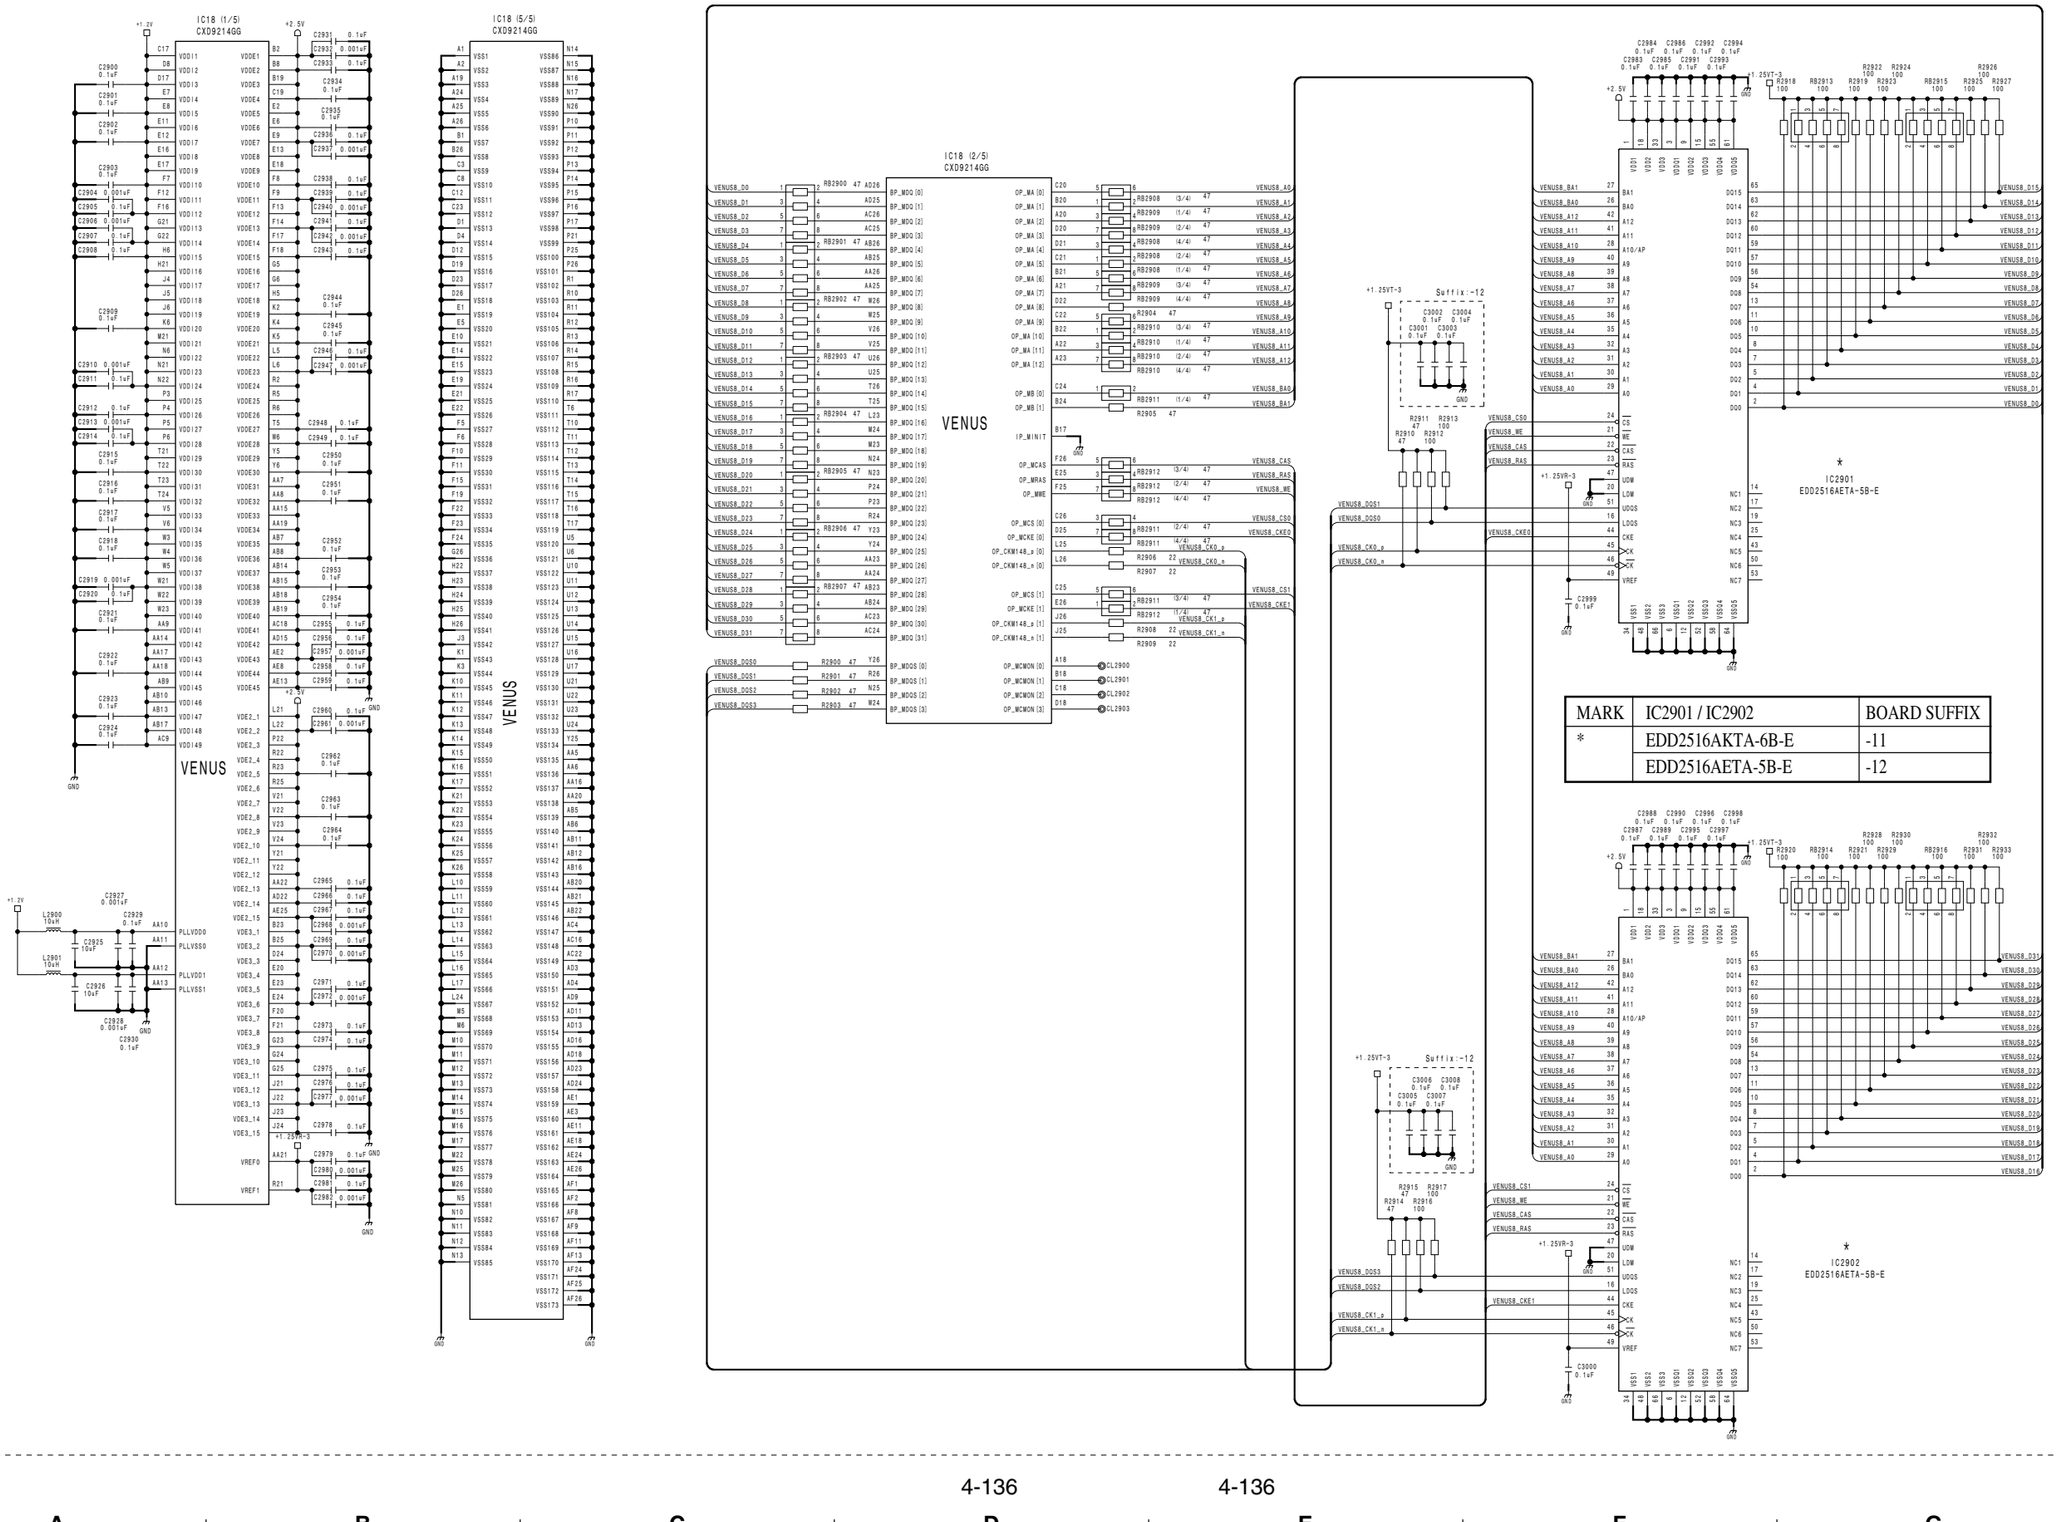


MARK	IC2901 / IC2902	BOARD SUFFIX
*	EDD2516AKTA-6B-E	-11
	EDD2516AETA-5B-E	-12


Format Converter Board
FC-109 (29/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_002_29


FC-109 (30/34)
SUFFIX: -11, -12

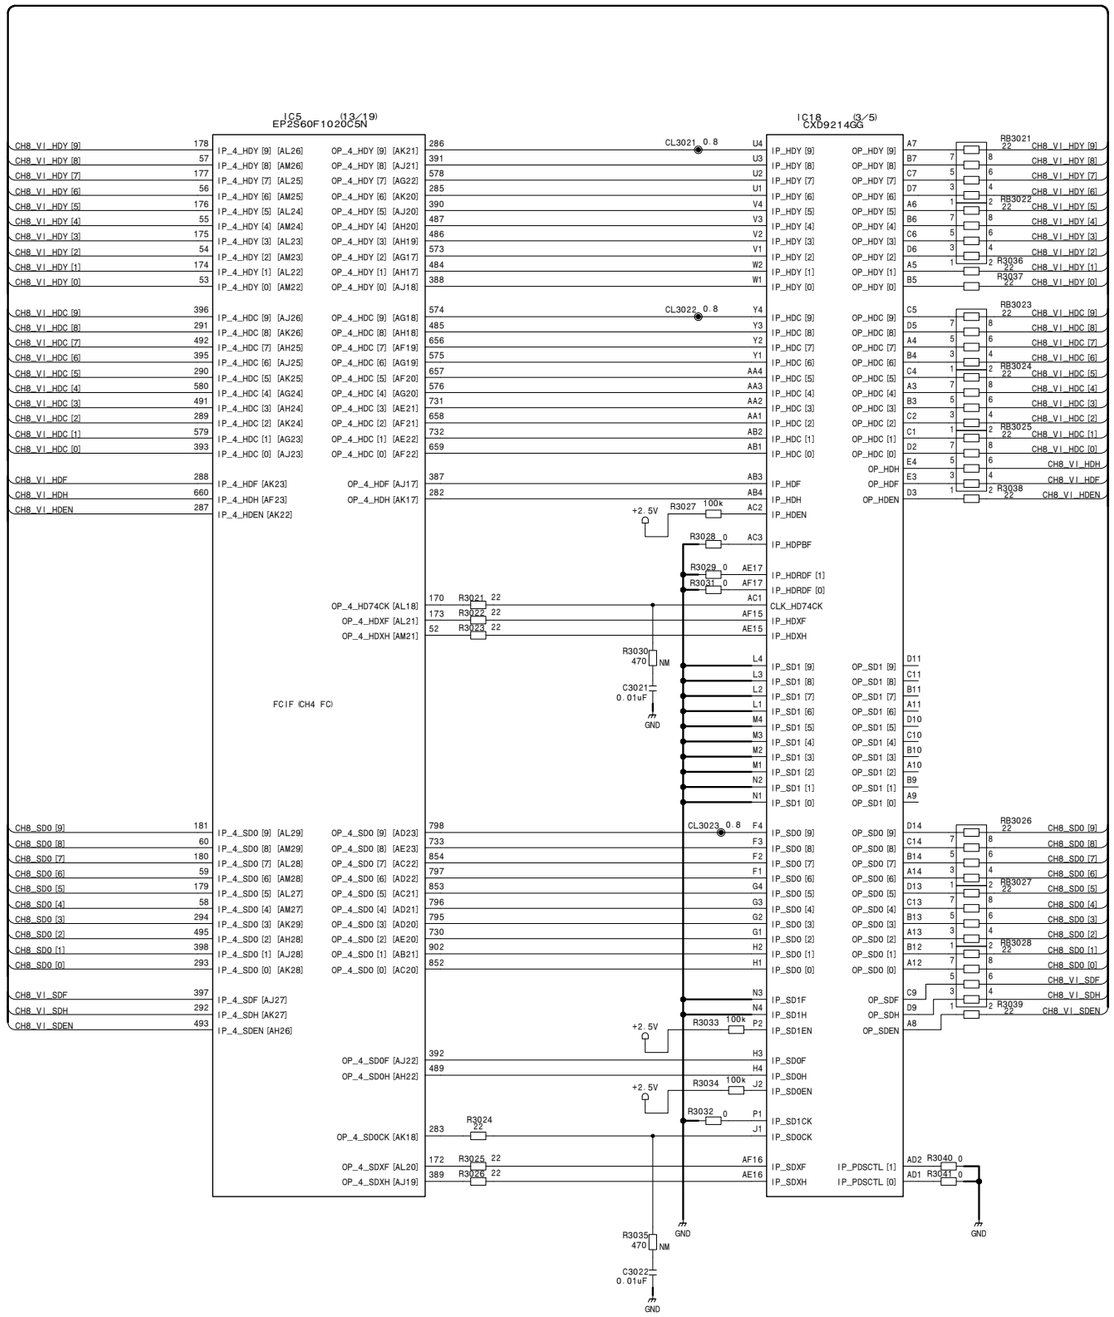


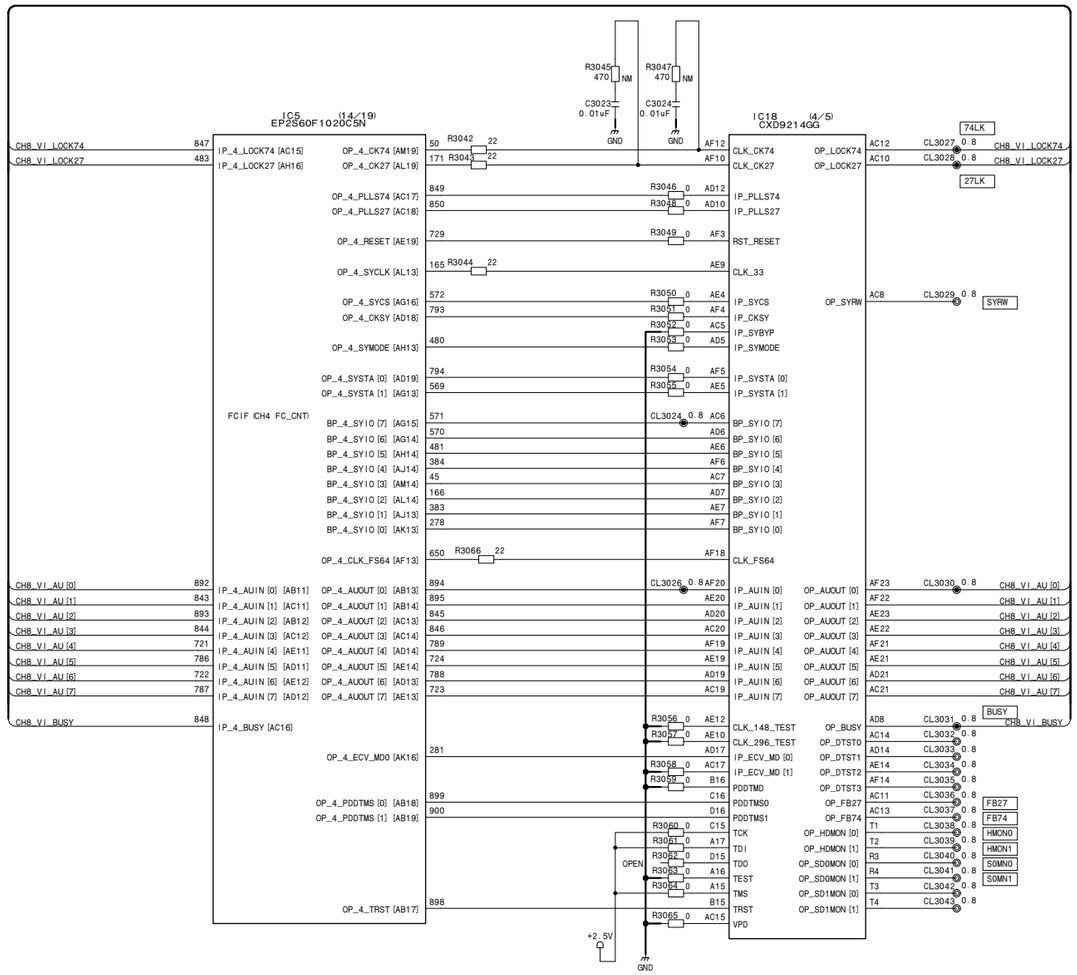



Format Converter Board
FC-109 (30/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_30

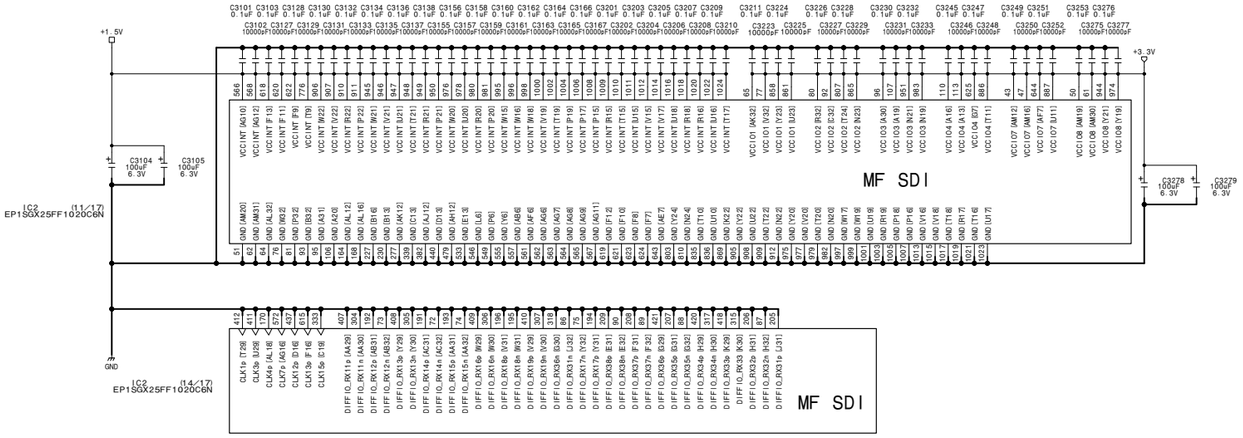


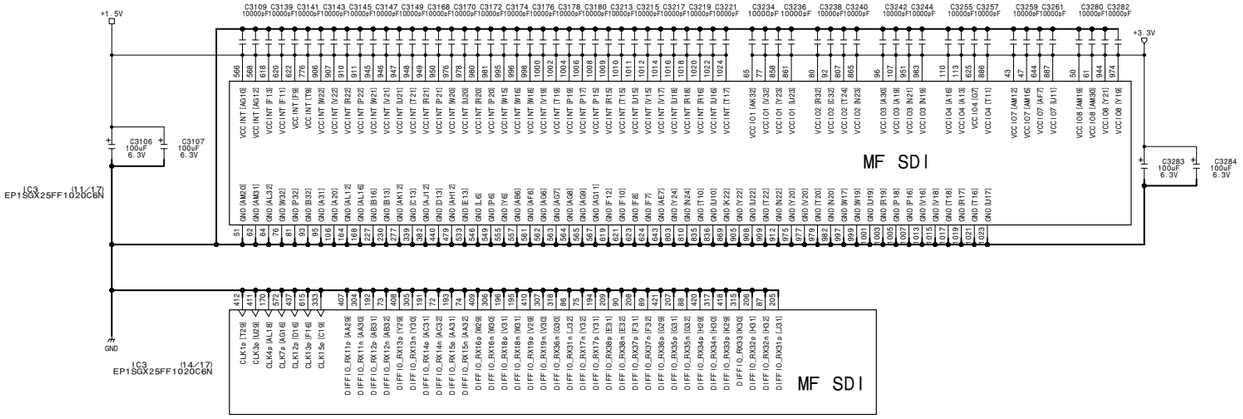








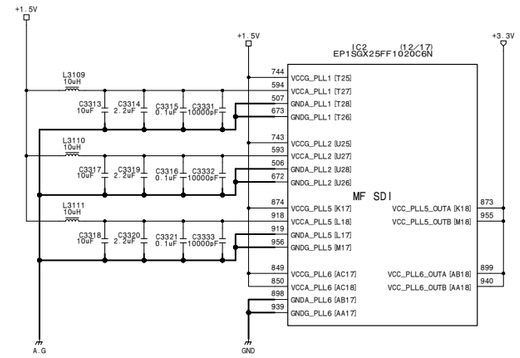

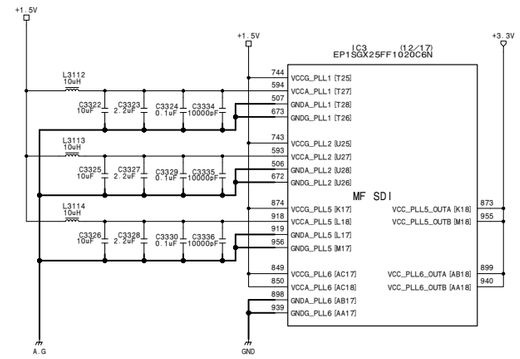


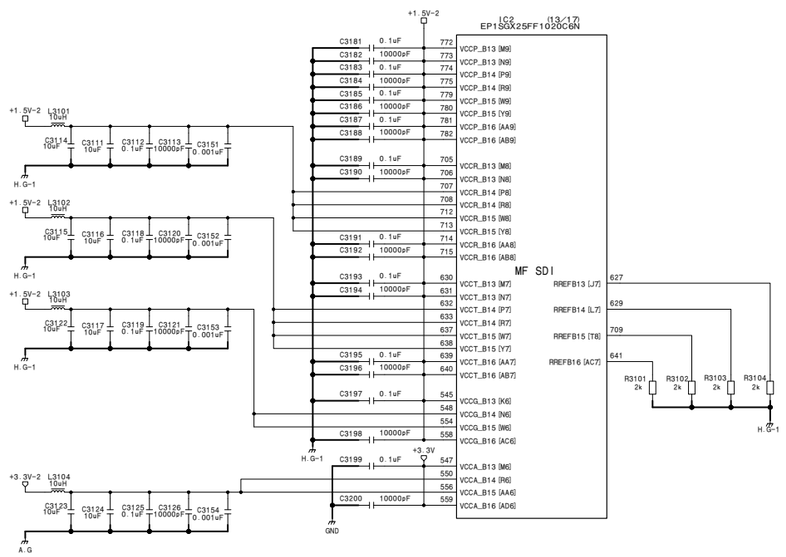

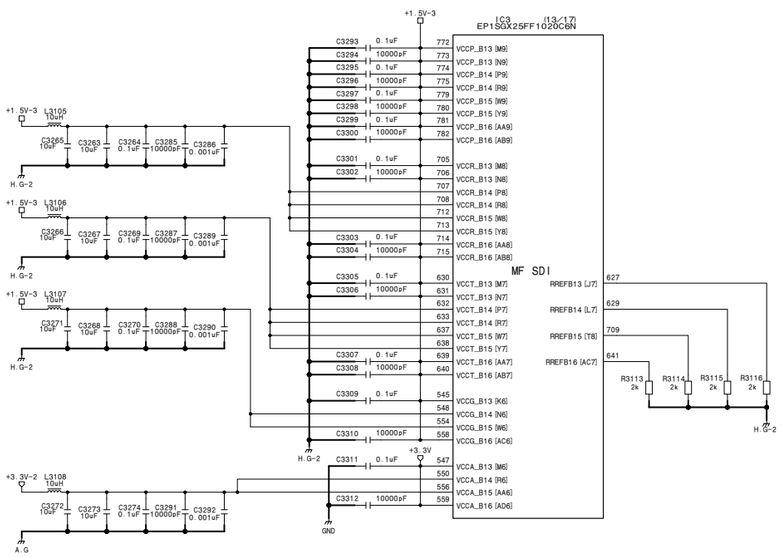





Format Converter Board
FC-109 (31/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_31

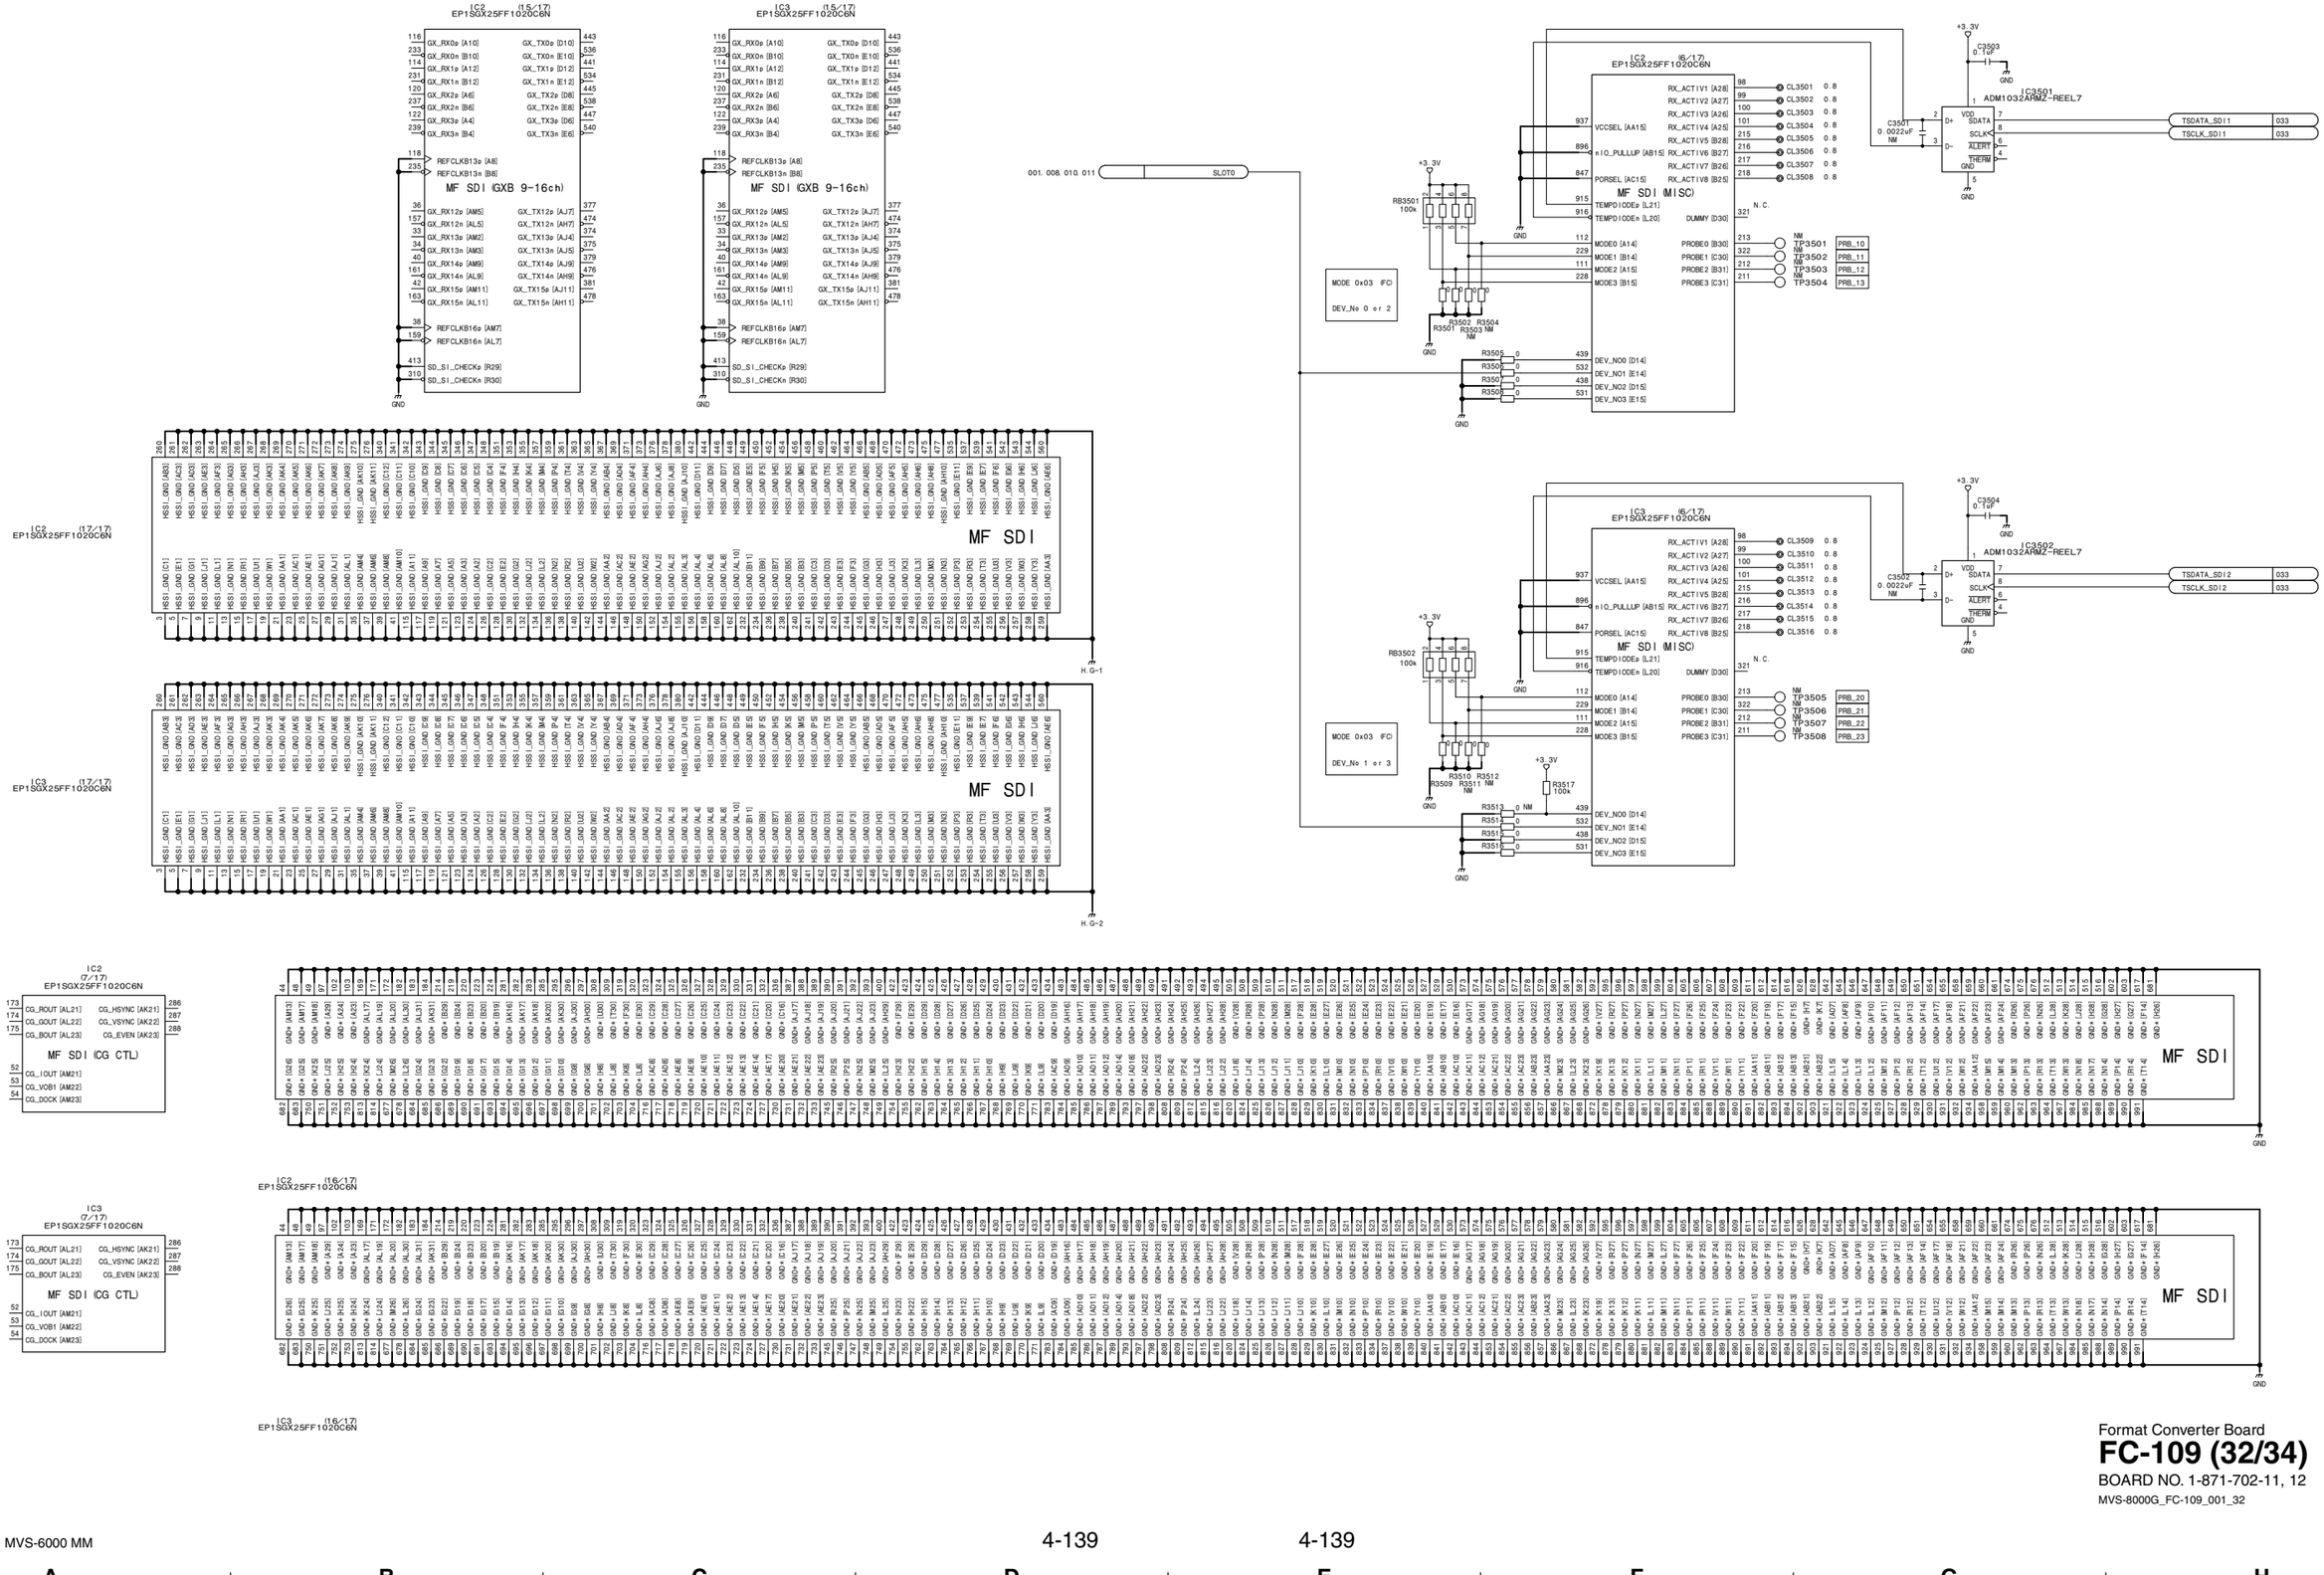



Format Converter Board
FC-109 (32/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_32


FC-109 (33/34)
SUFFIX: -11, -12

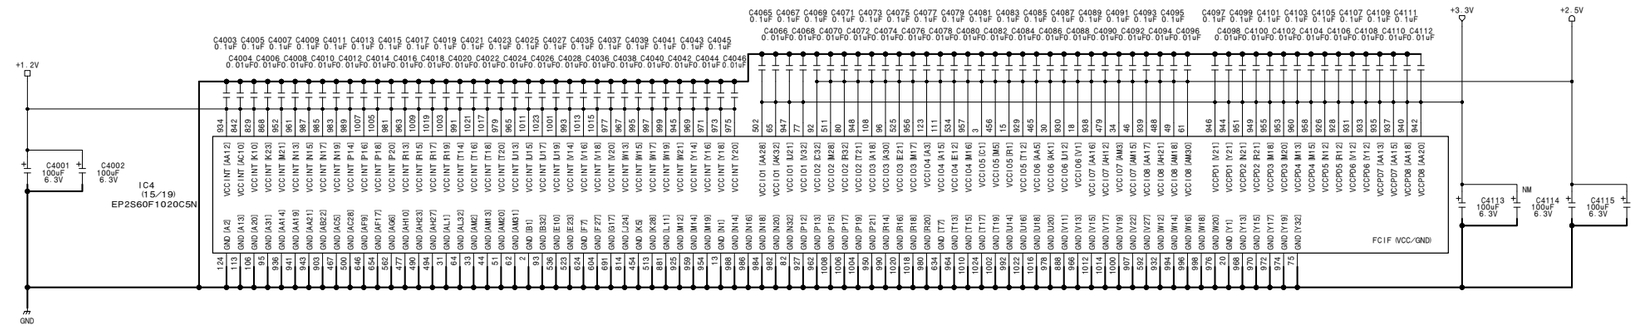





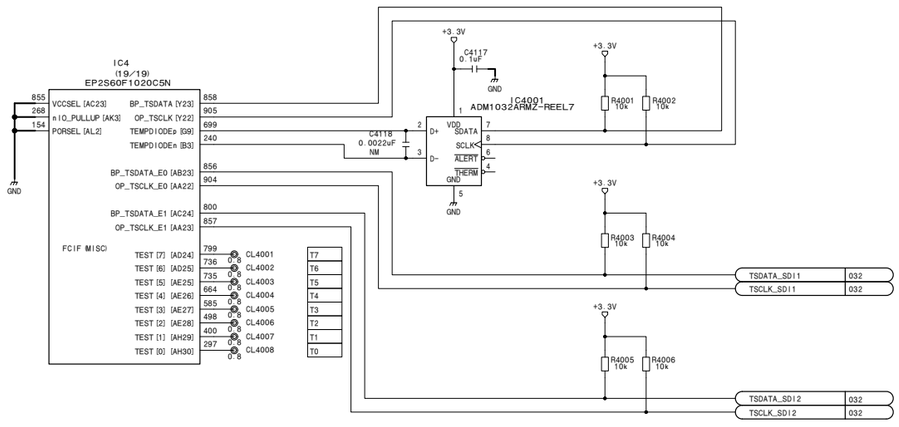

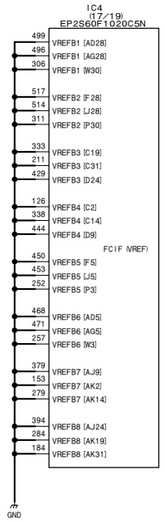



Format Converter Board
FC-109 (33/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_33


4-140


MVS-6000 MM


FC-109 (34/34)
SUFFIX: -11, -12

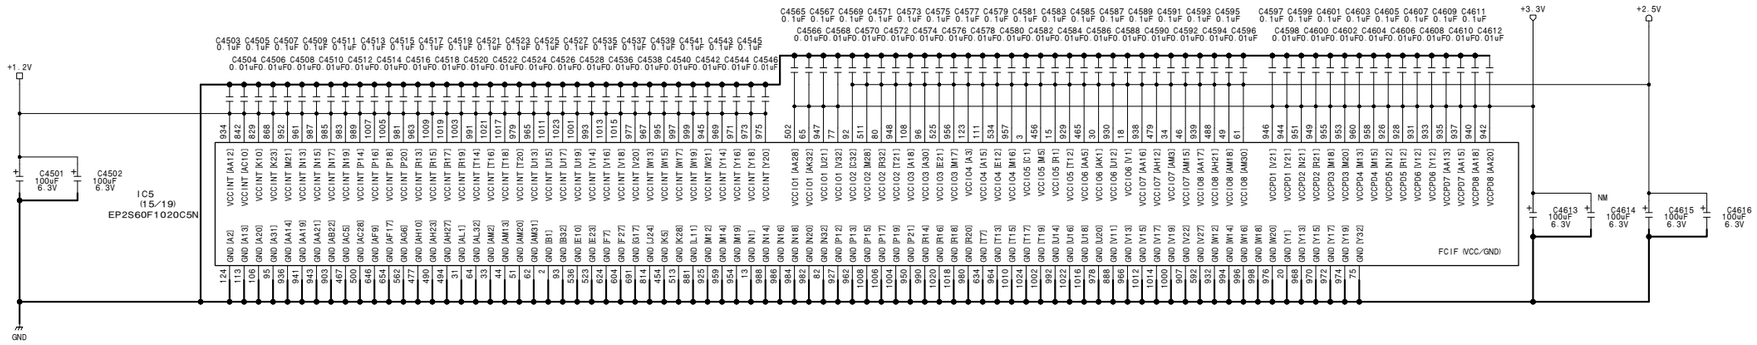

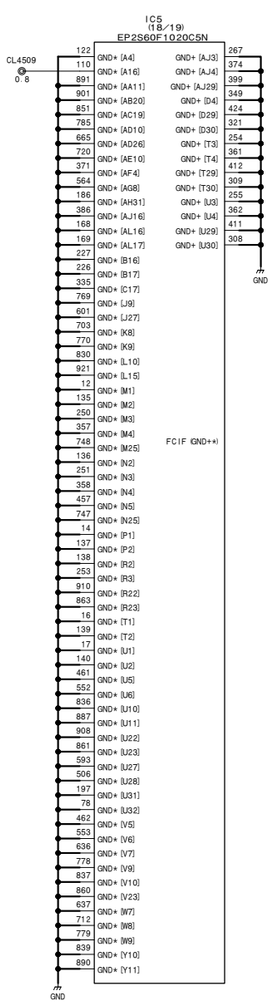


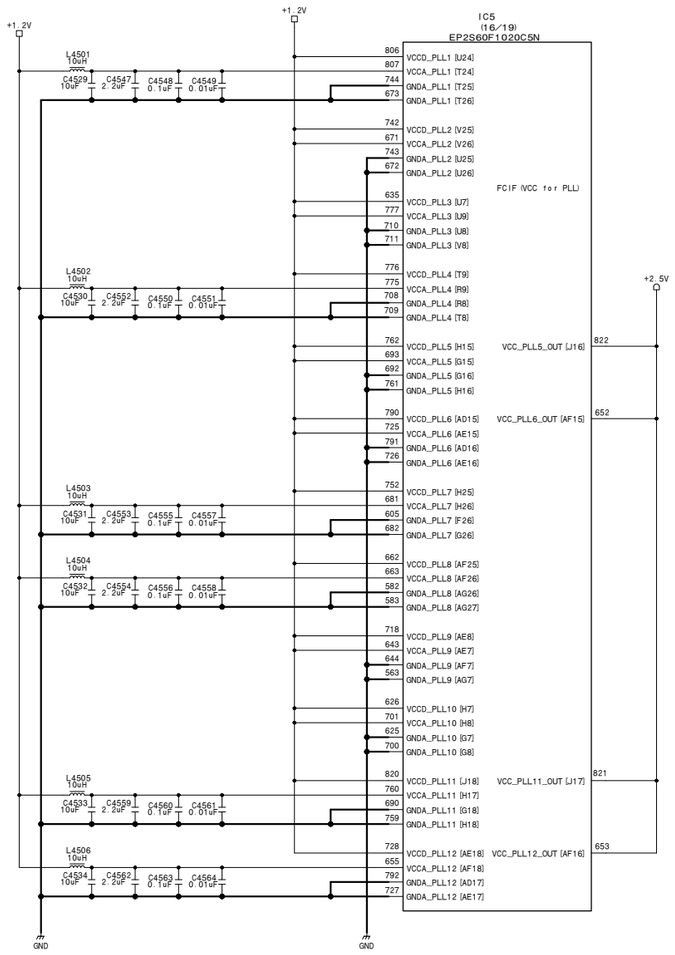

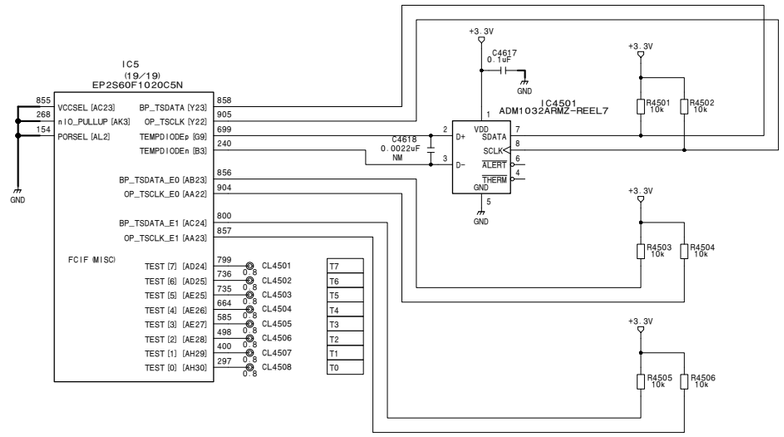

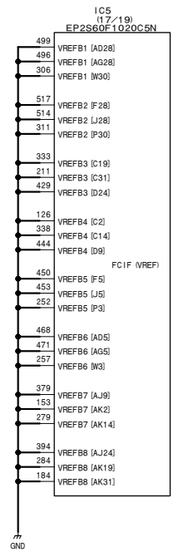

Format Converter Board
FC-109 (34/34)
BOARD NO. 1-871-702-11, 12
MVS-8000G_FC-109_001_34

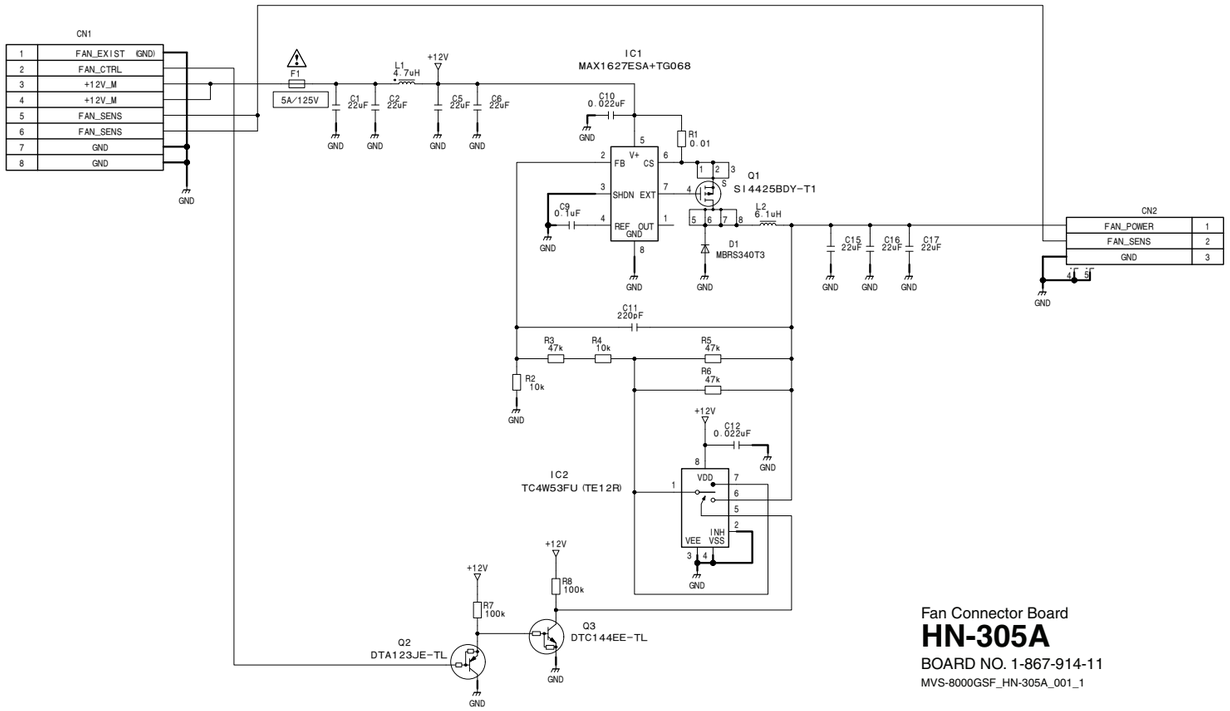


Fan Connector Board

HN-305A

BOARD NO. 1-867-914-11

MVS-8000GSF_HN-305A_001_1

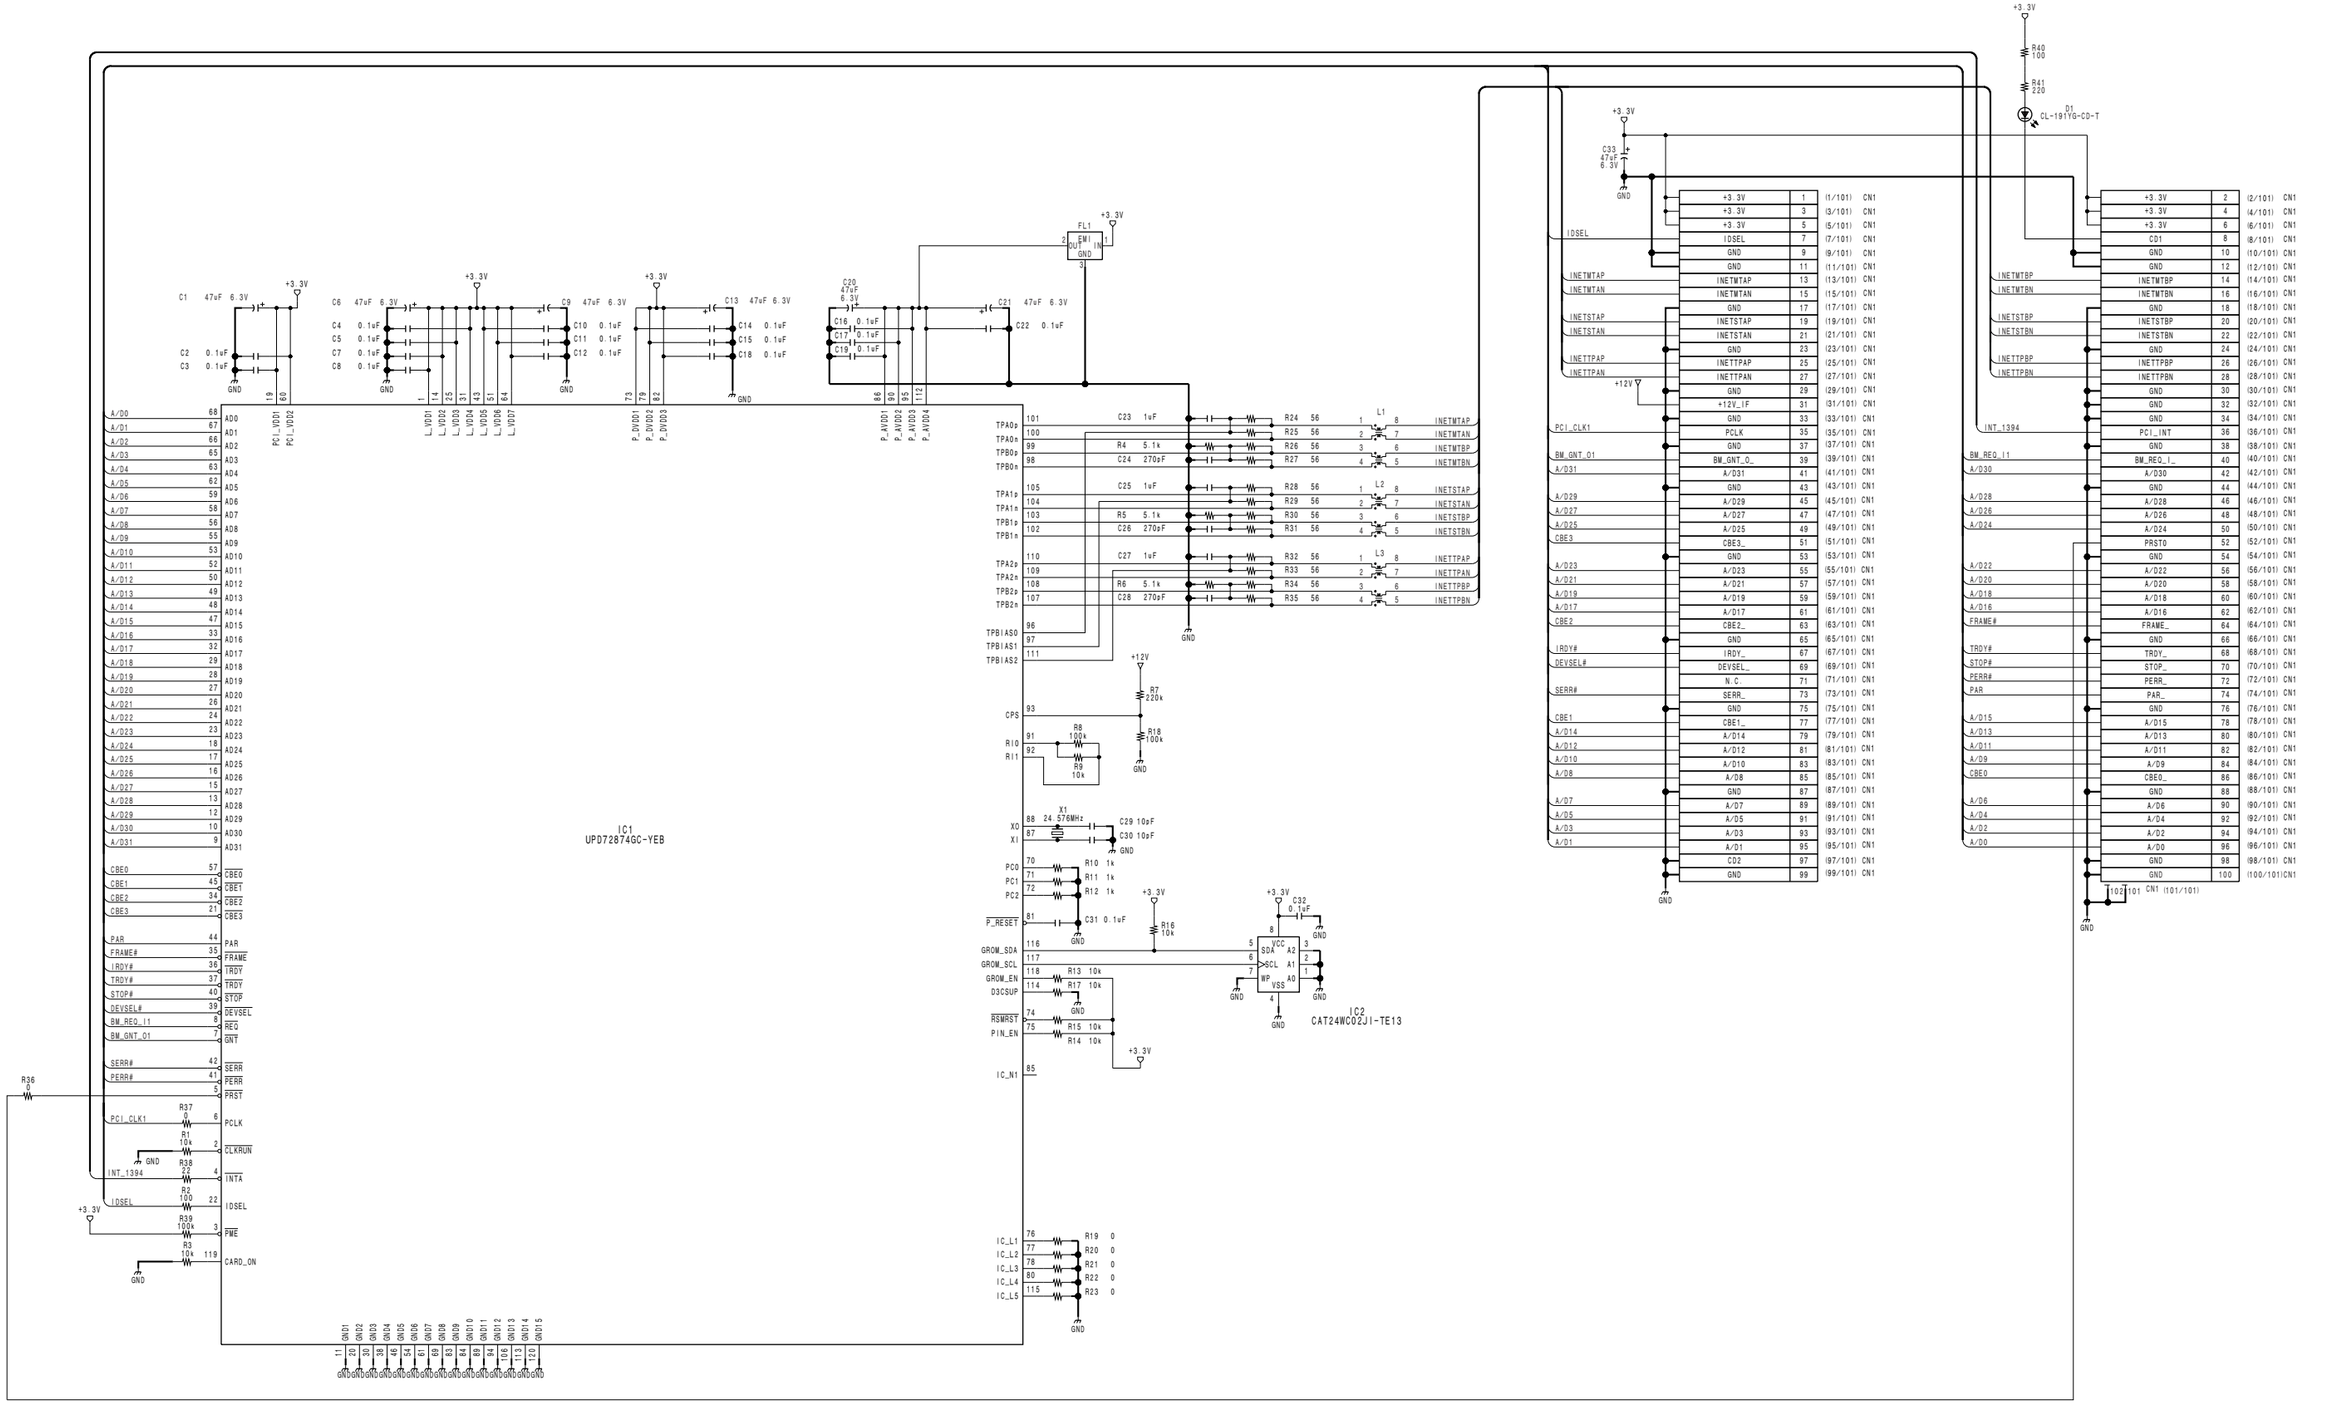

Interface Board
IF-937
BOARD NO. 1-861-064-11
SJX-283_IF-937_002_1

MB-1133 (1/9)
SUFFIX: -12

CNT1

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND	RESET_1L	DC_ENBL	BD_EXT_SL1F	FORMAT	FUSE+12V	GND
6	GND	GND	GND	BD_EXT_SL1R	GND		GND
7	GND	GND	GND		GND	GND	GND
8	GND			GND			GND
9	GND			GND			GND
10	GND	SD/ $\overline{\text{HD}}$ _1	SD/ $\overline{\text{HD}}$ _2	GND		SD/ $\overline{\text{HD}}$	GND
11	GND			GND			GND
12							
13							
14							
15	GND			GND			GND
16	GND			GND			GND
17	GND			GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND			GND
24	GND			GND			GND
25	GND			GND			GND

CNX1

	Z	A	B	C	D	E	F
1	GND	SDO11P	SDO11N	GND	SDO12P	SDO12N	GND
2	GND			GND			GND
3	GND	SDO9P	SDO9N	GND	SDO10P	SDO10N	GND
4	GND			GND			GND
5	GND	SDO7P	SDO7N	GND	SDO8P	SDO8N	GND
6	GND			GND			GND
7	GND	SDO5P	SDO5N	GND	SDO6P	SDO6N	GND
8	GND			GND			GND
9	GND	SDO3P	SDO3N	GND	SDO4P	SDO4N	GND
10	GND	SDO_FCV1P	SDO_FCV1N	GND	SDO_FCV2P	SDO_FCV2N	GND
11	GND	SDO1P	SDO1N	GND	SDO2P	SDO2N	GND
12							
13							
14							
15	GND	SDO23P	SDO23N	GND	SDO24P	SDO24N	GND
16	GND			GND			GND
17	GND	SDO21P	SDO21N	GND	SDO22P	SDO22N	GND
18	GND			GND			GND
19	GND	SDO19P	SDO19N	GND	SDO20P	SDO20N	GND
20	GND			GND			GND
21	GND	SDO17P	SDO17N	GND	SDO18P	SDO18N	GND
22	GND			GND			GND
23	GND	SDO15P	SDO15N	GND	SDO16P	SDO16N	GND
24	GND			GND			GND
25	GND	SDO13P	SDO13N	GND	SDO14P	SDO14N	GND

CNV1

	z	a	b	c	d	e	f
1	GND			GND			GND
2	GND			GND			GND
3	GND			GND			GND
4	GND			GND			GND
5	GND	DMEMON1_0P	DMEMON1_0N	GND	DMEMON1_1P	DMEMON1_1N	GND
6	GND	DMEMON1_2P	DMEMON1_2N	GND	DMEMON1_CKP	DMEMON1_CKN	GND
7	GND	DMEMON1_3P	DMEMON1_3N	GND	DMEMON1_4P	DMEMON1_4N	GND
8	GND			GND			GND
9	GND			GND			GND
10	GND			GND			GND
11	GND	DMEMON2_0P	DMEMON2_0N	GND	DMEMON2_1P	DMEMON2_1N	GND
12	GND	DMEMON2_2P	DMEMON2_2N	GND	DMEMON2_CKP	DMEMON2_CKN	GND
13	GND	DMEMON2_3P	DMEMON2_3N	GND	DMEMON2_4P	DMEMON2_4N	GND
14	GND			GND			GND
15	GND			GND			GND
16	GND			GND			GND
17	GND			GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND

CNW1

	Z	A	B	C	D	E	F
1	GND			GND			GND
2	GND	FC1_HFCKAP	FC1_HFCKAN	GND	(FC2_HFCKAP)	(FC2_HFCKAN)	GND
3	GND	FC1_CKXAP	FC1_CKXAN	GND	(FC2_CKXAP)	(FC2_CKXAN)	GND
4	GND	FC1_VDAP	FC1_VDAN	GND	(FC2_VDAP)	(FC2_VDAN)	GND
5	GND	FC1_HDAP	FC1_HDAN	GND	(FC2_HDAP)	(FC2_HDAN)	GND
6	GND	FC1_FLOEAP	FC1_FLOEAN	GND	(FC2_FLOEAP)	(FC2_FLOEAN)	GND
7	GND			GND			GND
8	GND	DOUT12P	DOUT12N	GND	DOUT24P	DOUT24N	GND
9	GND	DOUT11P	DOUT11N	GND	DOUT23P	DOUT23N	GND
10	GND	DOUT10P	DOUT10N	GND	DOUT22P	DOUT22N	GND
11	GND	DOUT9P	DOUT9N	GND	DOUT21P	DOUT21N	GND
12							
13							
14							
15	GND	DOUT8P	DOUT8N	GND	DOUT20P	DOUT20N	GND
16	GND	DOUT7P	DOUT7N	GND	DOUT19P	DOUT19N	GND
17	GND	DOUT6P	DOUT6N	GND	DOUT18P	DOUT18N	GND
18	GND	DOUT5P	DOUT5N	GND	DOUT17P	DOUT17N	GND
19	GND	DOUT4P	DOUT4N	GND	DOUT16P	DOUT16N	GND
20	GND	DOUT3P	DOUT3N	GND	DOUT15P	DOUT15N	GND
21	GND	DOUT2P	DOUT2N	GND	DOUT14P	DOUT14N	GND
22	GND	DOUT1P	DOUT1N	GND	DOUT13P	DOUT13N	GND
23	GND	DME_INET7WTAP	DME_INET7WTAN	GND	DME_INET7WTBP	DME_INET7WTBN	GND
24	GND	INET9WTAP	INET9WTAN	GND	INET9WTBP	INET9WTBN	GND
25	GND			GND			GND

CNZ1

	Z	A	B	C	D	E	F
1	GND	(DMEUTIL1VP)	(DMEUTIL1VN)	GND	(DMEUTIL2VP)	(DMEUTIL2VN)	GND
2	GND	(DMEMON1AP)	(DMEMON1AN)	GND	(DMEMON2AP)	(DMEMON2AN)	GND
3	GND	PBUSOUT01	PBUSOUT02	GND	PBUSOUT03	PBUSOUT04	GND
4	GND	PBUSOUT05	PBUSOUT06	GND	PBUSOUT07	PBUSOUT08	GND
5	GND	PBUSOUT09	PBUSOUT10	GND	PBUSOUT11	PBUSOUT12	GND
6	GND	PBUSOUT13	PBUSOUT14	GND	PBUSOUT15	PBUSOUT16	GND
7	GND	PBUSOUT17	PBUSOUT18	GND	PBUSOUT19	PBUSOUT20	GND
8	GND	PBUSOUT21	PBUSOUT22	GND	PBUSOUT23	PBUSOUT24	GND
9	GND	PBUSOUT25	PBUSOUT26	GND	PBUSOUT27	PBUSOUT28	GND
10	GND	PBUSOUT29	PBUSOUT30	GND	PBUSOUT31	PBUSOUT32	GND
11	GND	PBUSOUT33	PBUSOUT34	GND	PBUSOUT35	PBUSOUT36	GND
12							
13							
14							
15	GND	PBUSOUT37	PBUSOUT38	GND	PBUSOUT39	PBUSOUT40	GND
16	GND	PBUSOUT41	PBUSOUT42	GND	PBUSOUT43	PBUSOUT44	GND
17	GND	PBUSOUT45	PBUSOUT46	GND	(PBUSOUT47)	PBUSOUT48	GND
18	GND	PBUSOUT49	PBUSOUT50	GND	(PBUSOUT51)	(PBUSOUT52)	GND
19	GND	PBUSOUT53	PBUSOUT54	GND	(PBUSOUT55)	(PBUSOUT56)	GND
20	GND	PBUSOUT57	PBUSOUT58	GND	PBUSOUT59	PBUSOUT60	GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND	HFCK1SP	HFCK1SN	GND
24	GND	HD7P	HD7N	GND	CKXSP	CKXSN	GND
25	GND	FLOESP	FLOESN	GND	VD7P	VD7N	GND

Mother Board
MB-1133 (1/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_1

4-144

MB-1133 (2/9)
SUFFIX: -12

CNT2

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND	RESET_1L	DC_ENBL	BD_EXT_SL2F	FORMAT	FUSE+12V	GND
6	GND	GND	GND	BD_EXT_SL2R			GND
7	GND	GND	GND		GND	GND	GND
8	GND			GND			GND
9	GND			GND			GND
10	GND	SD/$\overline{\text{HD}}$_1	SD/$\overline{\text{HD}}$_2	GND		SD/$\overline{\text{HD}}$	GND
11	GND			GND			GND
12							
13							
14							
15	GND			GND			GND
16	GND			GND			GND
17	GND			GND			GND
18	GND	MON8P	MON8N	GND	DOUT12P	DOUT12N	GND
19	GND	MON7P	MON7N	GND	DOUT11P	DOUT11N	GND
20	GND	MON6P	MON6N	GND	DOUT10P	DOUT10N	GND
21	GND	MON5P	MON5N	GND	DOUT9P	DOUT9N	GND
22	GND	PP_BGA_P	PP_BGA_N	GND	DOUT8P	DOUT8N	GND
23	GND	PP_BGB_P	PP_BGB_N	GND	DOUT7P	DOUT7N	GND
24	GND	PP_UTIL1P	PP_UTIL1N	GND	DOUT6P	DOUT6N	GND
25	GND	PP_UTIL2P	PP_UTIL2N	GND	DOUT5P	DOUT5N	GND

B M't

CNB24

	z	a	b	c	d	e	f
1	GND	SDO11P	SDO11N	GND	SDO12P	SDO12N	GND
2	GND			GND			GND
3	GND	SDO9P	SDO9N	GND	SDO10P	SDO10N	GND
4	GND			GND			GND
5	GND	SDO7P	SDO7N	GND	SDO8P	SDO8N	GND
6	GND			GND			GND
7	GND	SDO5P	SDO5N	GND	SDO6P	SDO6N	GND
8	GND			GND			GND
9	GND	SDO3P	SDO3N	GND	SDO4P	SDO4N	GND
10	GND	SDO_FCV1P	SDO_FCV1N	GND	SDO_FCV2P	SDO_FCV2N	GND
11	GND	SDO1P	SDO1N	GND	SDO2P	SDO2N	GND

CNV2

	z	a	b	c	d	e	f
1	GND	DIN09BP	DIN09BN	GND	DIN32BP	DIN32BN	GND
2	GND	DIN08BP	DIN08BN	GND	DIN31BP	DIN31BN	GND
3	GND	DIN07BP	DIN07BN	GND	DIN30BP	DIN30BN	GND
4	GND	DIN06BP	DIN06BN	GND	DIN29BP	DIN29BN	GND
5	GND	DIN24BP	DIN24BN	GND	DIN15BP	DIN15BN	GND
6	GND	DIN23BP	DIN23BN	GND	DIN14BP	DIN14BN	GND
7	GND	DIN22BP	DIN22BN	GND	DIN28BP	DIN28BN	GND
8	GND	DIN21BP	DIN21BN	GND	DIN27BP	DIN27BN	GND
9	GND	DIN20BP	DIN20BN	GND	DIN11BP	DIN11BN	GND
10	GND	DIN19BP	DIN19BN	GND	DIN10BP	DIN10BN	GND
11	GND	DIN18BP	DIN18BN	GND	DIN01BP	DIN01BN	GND
12	GND	DIN17BP	DIN17BN	GND	DIN26BP	DIN26BN	GND
13	GND	DIN16BP	DIN16BN	GND	DIN25BP	DIN25BN	GND
14	GND	DIN13BP	DIN13BN	GND	PP_OUT1VP	PP_OUT1VN	GND
15	GND	DIN12BP	DIN12BN	GND	PP_OUT2VP	PP_OUT2VN	GND
16	GND	DIN05BP	DIN05BN	GND	PP_OUT3VP	PP_OUT3VN	GND
17	GND	DIN04BP	DIN04BN	GND	DIN39AP	DIN39AN	GND
18	GND	DIN03BP	DIN03BN	GND	DIN38AP	DIN38AN	GND
19	GND	DIN02BP	DIN02BN	GND	DIN37AP	DIN37AN	GND
20	GND	ME1_OUT1VP	ME1_OUT1VN	GND	PP_OUT4VP	PP_OUT4VN	GND
21	GND	ME1_OUT2VP	ME1_OUT2VN	GND	ME1_OUT4VP	ME1_OUT4VN	GND
22	GND	ME1_OUT3VP	ME1_OUT3VN	GND	PP_BGCLVP	PP_BGCLVN	GND

CNY2

	z	a	b	c	d	e	f
1	GND	PP_SR1KP	PP_SR1KN	GND	PP_SR3KP	PP_SR3KN	GND
2	GND	DIN49AP	DIN49AN	GND	DIN41AP	DIN41AN	GND
3	GND	PP_FL1VP	PP_FL1VN	GND	PP_FL3VP	PP_FL3VN	GND
4	GND	PP_SR2KP	PP_SR2KN	GND	PP_SR4KP	PP_SR4KN	GND
5	GND	PP_FL2VP	PP_FL2VN	GND	PP_FL4VP	PP_FL4VN	GND
6	GND	DIN48AP	DIN48AN	GND	DIN40AP	DIN40AN	GND
7	GND	DIN47AP	DIN47AN	GND	DIN43AP	DIN43AN	GND
8	GND	DIN46AP	DIN46AN	GND	DIN42AP	DIN42AN	GND
9	GND	DIN45AP	DIN45AN	GND	DIN36AP	DIN36AN	GND
10	GND	DIN44AP	DIN44AN	GND	DIN35AP	DIN35AN	GND
11	GND	(Reserve_OUT)	(Reserve_OUT)	GND	MON4P	MON4N	GND
12	GND	(Reserve_OUT)	(Reserve_OUT)	GND	MON3P	MON3N	GND
13	GND	DIN34AP	DIN34AN	GND	MON2P	MON2N	GND
14	GND	DIN33AP	DIN33AN	GND	MON1P	MON1N	GND
15	GND	(Reserve_OUT)	(Reserve_OUT)	GND	MYOUT7VBP	MYOUT7VBN	GND
16	GND	(Reserve_OUT)	(Reserve_OUT)	GND	MYOUT8VBP	MYOUT8VBN	GND
17	GND	(Reserve_OUT)	(Reserve_OUT)	GND	(Reserve_OUT)	(Reserve_OUT)	GND
18	GND	CCRIN1VP	CCRIN1VN	GND	MYIN2VP	MYIN2VN	GND
19	GND	CCRIN2VP	CCRIN2VN	GND	MYIN3VP	MYIN3VN	GND
20	GND	MYIN1VP	MYIN1VN	GND	MYIN4VP	MYIN4VN	GND
21	GND	CCROUT1VBP	CCROUT1VBN	GND	MYOUT3VBP	MYOUT3VBN	GND
22	GND	CCROUT2VBP	CCROUT2VBN	GND	MYOUT4VBP	MYOUT4VBN	GND

CNW2

	Z	A	B	C	D	E	F
1	GND			GND			GND
2	GND			GND			GND
3	GND			GND			GND
4	GND			GND			GND
5	GND			GND			GND
6	GND			GND			GND
7	GND	ME1_BGA_P	ME1_BGA_N	GND	DOUT24P	DOUT24N	GND
8	GND	ME1_BGB_P	ME1_BGB_N	GND	DOUT23P	DOUT23N	GND
9	GND	ME1_UTIL1P	ME1_UTIL1N	GND	DOUT22P	DOUT22N	GND
10	GND	ME1_UTIL2P	ME1_UTIL2N	GND	DOUT21P	DOUT21N	GND
11	GND	ME1_SR1KP	ME1_SR1KN	GND	DOUT20P	DOUT20N	GND
12							
13							
14							
15	GND	ME1_FL1VP	ME1_FL1VN	GND	DOUT19P	DOUT19N	GND
16	GND	ME1_SR2KP	ME1_SR2KN	GND	DOUT18P	DOUT18N	GND
17	GND	ME1_FL2VP	ME1_FL2VN	GND	DOUT17P	DOUT17N	GND
18	GND	ME1_SR3KP	ME1_SR3KN	GND	DOUT16P	DOUT16N	GND
19	GND	ME1_FL3VP	ME1_FL3VN	GND	DOUT15P	DOUT15N	GND
20	GND	DOUT4P	DOUT4N	GND	DOUT14P	DOUT14N	GND
21	GND	DOUT3P	DOUT3N	GND	DOUT13P	DOUT13N	GND
22	GND	ME1_SR4KP	ME1_SR4KN	GND	DOUT2P	DOUT2N	GND
23	GND	ME1_FL4VP	ME1_FL4VN	GND	DOUT1P	DOUT1N	GND
24	GND			GND			GND
25	GND			GND			GND

CNZ2

	Z	A	B	C	D	E	F
1	GND	MYOUT1VBP	MYOUT1VBN	GND	MYOUT5VBP	MYOUT5VBN	GND
2	GND	MYOUT2VBP	MYOUT2VBN	GND	MYOUT6VBP	MYOUT6VBN	GND
3	GND	PBUSOUT01	PBUSOUT02	GND	PBUSOUT03	PBUSOUT04	GND
4	GND	PBUSOUT05	PBUSOUT06	GND	PBUSOUT07	PBUSOUT08	GND
5	GND	PBUSOUT09	PBUSOUT10	GND	PBUSOUT11	PBUSOUT12	GND
6	GND	PBUSOUT13	PBUSOUT14	GND	PBUSOUT15	PBUSOUT16	GND
7	GND	PBUSOUT17	PBUSOUT18	GND	PBUSOUT19	PBUSOUT20	GND
8	GND	PBUSOUT21	PBUSOUT22	GND	PBUSOUT23	PBUSOUT24	GND
9	GND	PBUSOUT25	PBUSOUT26	GND	PBUSOUT27	PBUSOUT28	GND
10	GND	PBUSOUT29	PBUSOUT30	GND	PBUSOUT31	PBUSOUT32	GND
11	GND	PBUSOUT33	PBUSOUT34	GND	PBUSOUT35	PBUSOUT36	GND
12							
13							
14							
15	GND	PBUSOUT37	PBUSOUT38	GND	PBUSOUT39	PBUSOUT40	GND
16	GND	PBUSOUT41	PBUSOUT42	GND	PBUSOUT43	PBUSOUT44	GND
17	GND	PBUSOUT45	(PBUSOUT46)	GND	(PBUSOUT47)	PBUSOUT48	GND
18	GND	(PBUSOUT49)	(PBUSOUT50)	GND	PBUSOUT49	PBUSOUT50	GND
19	GND	(PBUSOUT53)	(PBUSOUT54)	GND	(PBUSOUT55)	(PBUSOUT56)	GND
20	GND	PBUSOUT57	PBUSOUT58	GND	PBUSOUT59	PBUSOUT60	GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND	HFCK11P	HFCK11N	GND
24	GND	HD5P	HD5N	GND	CKX7P	CKX7N	GND
25	GND	FLOE7P	FLOE7N	GND	VD5P	VD5N	GND

Mother Board
MB-1133 (2/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_2

MB-1133 (3/9)
SUFFIX: -12

B M't

CNB31

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND	RESET_2L	DC_ENBL		FORMAT	FUSE+12V	GND
6	GND	GND		BD_EXT_SL3R	GND	GND	GND
7	GND		GND		GND	GND	GND
8	GND			GND			GND
9	GND	MON8P	MON8N	GND			GND
10	GND			GND			GND
11	GND	MON7P	MON7N	GND			GND
12							
13							
14							
15	GND	MON6P	MON6N	GND			GND
16	GND			GND			GND
17	GND	MON5P	MON5N	GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND			GND
24	GND			GND			GND
25	GND			GND			GND

CNX3

	Z	A	B	C	D	E	F
1	GND			GND	ME1_SR1KP	ME1_SR1KN	GND
2	GND			GND	ME1_FL1VP	ME1_FL1VN	GND
3	GND			GND	ME1_SR2KP	ME1_SR2KN	GND
4	GND			GND	ME1_FL2VP	ME1_FL2VN	GND
5	GND			GND	ME1_SR3KP	ME1_SR3KN	GND
6	GND			GND	ME1_FL3VP	ME1_FL3VN	GND
7	GND			GND	ME1_SR4KP	ME1_SR4KN	GND
8	GND			GND	ME1_FL4VP	ME1_FL4VN	GND
9	GND	ME1_OUT1VP	ME1_OUT1VN	GND			GND
10	GND	ME1_OUT2VP	ME1_OUT2VN	GND			GND
11	GND	ME1_OUT3VP	ME1_OUT3VN	GND			GND
12							
13							
14							
15	GND			GND	PP_SR1KP	PP_SR1KN	GND
16	GND			GND	PP_FL1VP	PP_FL1VN	GND
17	GND			GND	PP_SR2KP	PP_SR2KN	GND
18	GND			GND	PP_FL2VP	PP_FL2VN	GND
19	GND			GND	PP_SR3KP	PP_SR3KN	GND
20	GND			GND	PP_FL3VP	PP_FL3VN	GND
21	GND			GND	PP_SR4KP	PP_SR4KN	GND
22	GND			GND	PP_FL4VP	PP_FL4VN	GND
23	GND	PP_OUT4VP	PP_OUT4VN	GND			GND
24	GND	ME1_OUT4VP	ME1_OUT4VN	GND			GND
25	GND	PP_BGCLVP	PP_BGCLVN	GND			GND

CNV3

	z	a	b	c	d	e	f
1	GND	SEND1V1P	SEND1V1N	GND	SEND1V2P	SEND1V2N	GND
2	GND	SEND1V3P	SEND1V3N	GND	SEND1V4P	SEND1V4N	GND
3	GND	SENDK1P	SENDK1N	GND	SENDK2P	SENDK2N	GND
4	GND	SENDK3P	SENDK3N	GND	SENDK4P	SENDK4N	GND
5	GND	SEND2V1P	SEND2V1N	GND	SEND2V2P	SEND2V2N	GND
6	GND	SEND2V3P	SEND2V3N	GND	SEND2V4P	SEND2V4N	GND
7	GND			GND			GND
8	GND			GND	PP_BGA_P	PP_BGA_N	GND
9	GND			GND	PP_BGB_P	PP_BGB_N	GND
10	GND			GND	PP_UTIL1P	PP_UTIL1N	GND
11	GND			GND	PP_UTIL2P	PP_UTIL2N	GND
12	GND			GND	ME1_BGA_P	ME1_BGA_N	GND
13	GND			GND	ME1_BGB_P	ME1_BGB_N	GND
14	GND			GND	ME1_UTIL1P	ME1_UTIL1N	GND
15	GND			GND	ME1_UTIL2P	ME1_UTIL2N	GND
16	GND	PP_OUT1VP	PP_OUT1VN	GND			GND
17	GND	PP_OUT2VP	PP_OUT2VN	GND			GND
18	GND	PP_OUT3VP	PP_OUT3VN	GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND

B M't

CNB35

	z	a	b	c	d	e	f
1	GND			GND			GND
2	GND			GND			GND
3	GND			GND			GND
4	GND			GND			GND
5	GND			GND			GND
6	GND			GND			GND
7	GND			GND			GND
8	GND	MON4P	MON4N	GND			GND
9	GND			GND			GND
10	GND	MON3P	MON3N	GND			GND
11	GND			GND			GND
12	GND	MON2P	MON2N	GND			GND
13	GND			GND			GND
14	GND	MON1P	MON1N	GND			GND
15	GND			GND			GND
16	GND			GND			GND
17	GND			GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND

CNZ3

	Z	A	B	C	D	E	F
1	GND	EFFIN1V1P	EFFIN1V1N	GND	EFFIN1V2P	EFFIN1V2N	GND
2	GND	EFFIN1V3P	EFFIN1V3N	GND	EFFIN1V4P	EFFIN1V4N	GND
3	GND			GND			GND
4	GND			GND			GND
5	GND	EFFINK1P	EFFINK1N	GND	EFFINK2P	EFFINK2N	GND
6	GND	EFFINK3P	EFFINK3N	GND	EFFINK4P	EFFINK4N	GND
7	GND			GND			GND
8	GND			GND			GND
9	GND	EFFIN2V1P	EFFIN2V1N	GND	EFFIN2V2P	EFFIN2V2N	GND
10	GND	EFFIN2V3P	EFFIN2V3N	GND	EFFIN2V4P	EFFIN2V4N	GND
11	GND			BD_EXT_SL3F			GND
12							
13							
14							
15	GND			GND			GND
16	GND	INET10WTAP	INET10WTAN	GND	INET10WTBP	INET10WTBN	GND
17	GND			GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND	HFCK08P	HFCK08N	GND
24	GND	HD3P	HD3N	GND	CKX3P	CKX3N	GND
25	GND	FLOE3P	FLOE3N	GND	VD3P	VD3N	GND

Mother Board
MB-1133 (3/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_3

4-146

MB-1133 (4/9)
SUFFIX: -12

CNT4

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND	DME_RESET_1L	DME_DC_ENBL	BD_EXT_SL4F	DME_FORMAT	DME_FUSE+12V	GND
6	GND			BD_EXT_SL4R			GND
7	GND	GND	GND		GND	GND	GND
8	GND			GND			GND
9	GND			GND			GND
10	GND			GND			GND
11	GND			GND			GND
12							
13							
14							
15	GND	SEND1V1P	SEND1V1N	GND	SEND1V2P	SEND1V2N	GND
16	GND	SEND1V3P	SEND1V3N	GND	SEND1V4P	SEND1V4N	GND
17	GND			GND			GND
18	GND			GND			GND
19	GND	SENDK1P	SENDK1N	GND	SENDK2P	SENDK2N	GND
20	GND	SENDK3P	SENDK3N	GND	SENDK4P	SENDK4N	GND
21	GND			GND			GND
22	GND			GND			GND
23	GND	SEND2V1P	SEND2V1N	GND	SEND2V2P	SEND2V2N	GND
24	GND	SEND2V3P	SEND2V3N	GND	SEND2V4P	SEND2V4N	GND
25	GND			GND			GND

CNV4

	z	a	b	c	d	e	f
1	GND			GND			GND
2	GND			GND			GND
3	GND			GND			GND
4	GND			GND			GND
5	GND	DMEMON1_0P	DMEMON1_0N	GND	DMEMON1_1P	DMEMON1_1N	GND
6	GND	DMEMON1_2P	DMEMON1_2N	GND	DMEMON1_CKP	DMEMON1_CKN	GND
7	GND	DMEMON1_3P	DMEMON1_3N	GND	DMEMON1_4P	DMEMON1_4N	GND
8	GND			GND			GND
9	GND			GND			GND
10	GND			GND			GND
11	GND	DMEMON2_0P	DMEMON2_0N	GND	DMEMON2_1P	DMEMON2_1N	GND
12	GND	DMEMON2_2P	DMEMON2_2N	GND	DMEMON2_CKP	DMEMON2_CKN	GND
13	GND	DMEMON2_3P	DMEMON2_3N	GND	DMEMON2_4P	DMEMON2_4N	GND
14	GND			GND			GND
15	GND			GND			GND
16	GND			GND			GND
17	GND			GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND

CNW4

	Z	A	B	C	D	E	F
1	GND	(EXT1IN1P)	(EXT1IN1N)	GND	(EXT1IN2P)	(EXT1IN2N)	GND
2	GND	(EXT1IN3P)	(EXT1IN3N)	GND	(EXT1INCKP)	(EXT1INCKN)	GND
3	GND	(EXT3IN1P)	(EXT3IN1N)	GND	(EXT2IN2P)	(EXT2IN2N)	GND
4	GND	(EXT3IN3P)	(EXT3IN3N)	GND	(EXT2INCKP)	(EXT2INCKN)	GND
5	GND	GND (PID1)	GND (PID0)	GND	GND (PID3)	(PID2)	GND
6	GND	BUS_A0	BUS_A1	GND	BUS_A2	BUS_A3	GND
7	GND	BUS_A4	BUS_A5	GND	BUS_A6	BUS_A7	GND
8	GND	BUS_A8	BUS_A9	GND	BUS_A10	BUS_A11	GND
9	GND	BUS_A12	BUS_A13	GND	BUS_A14	BUS_A15	GND
10	GND	BUS_OE	BUS_WE	GND	BUS_CS1	BUS_CS2	GND
11	GND	BUS_CS3	BUS_CS4	GND	BUS_CS5	BUS_CSX	GND
12							
13							
14							
15	GND	BUS_D0	BUS_D1	GND	BUS_D2	BUS_D3	GND
16	GND	BUS_D4	BUS_D5	GND	BUS_D6	BUS_D7	GND
17	GND	BUS_D8	BUS_D9	GND	BUS_D10	BUS_D11	GND
18	GND	BUS_D12	BUS_D13	GND	BUS_D14	BUS_D15	GND
19	GND	BUS_INT	BUS_BUSY	GND	BUS_UB	BUS_LB	GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND			GND
24	GND			GND			GND
25	GND			GND			GND

B M't

CNB44

	z	a	b	c	d	e	f
1	GND	DIN49AP	DIN49AN	GND	DIN41AP	DIN41AN	GND
2	GND	DIN48AP	DIN48AN	GND	DIN40AP	DIN40AN	GND
3	GND	DIN47AP	DIN47AN	GND	DIN39AP	DIN39AN	GND
4	GND	DIN46AP	DIN46AN	GND	DIN38AP	DIN38AN	GND
5	GND	DIN45AP	DIN45AN	GND	DIN37AP	DIN37AN	GND
6	GND	DIN44AP	DIN44AN	GND	DIN36AP	DIN36AN	GND
7	GND	DIN43AP	DIN43AN	GND	DIN35AP	DIN35AN	GND
8	GND	DIN42AP	DIN42AN	GND	DIN34AP	DIN34AN	GND
9	GND			GND	DIN33AP	DIN33AN	GND
10	GND			GND			GND
11	GND			GND			GND

CNZ4

	Z	A	B	C	D	E	F
1	GND	EFFIN1V1P	EFFIN1V1N	GND	EFFIN1V2P	EFFIN1V2N	GND
2	GND	EFFIN1V3P	EFFIN1V3N	GND	EFFIN1V4P	EFFIN1V4N	GND
3	GND			GND			GND
4	GND			GND			GND
5	GND	EFFINK1P	EFFINK1N	GND	EFFINK2P	EFFINK2N	GND
6	GND	EFFINK3P	EFFINK3N	GND	EFFINK4P	EFFINK4N	GND
7	GND			GND			GND
8	GND			GND			GND
9	GND	EFFIN2V1P	EFFIN2V1N	GND	EFFIN2V2P	EFFIN2V2N	GND
10	GND	EFFIN2V3P	EFFIN2V3N	GND	EFFIN2V4P	EFFIN2V4N	GND
11	GND			GND			GND
12							
13							
14							
15	GND			GND			GND
16	GND	(PZKOUT1P)	(PZKOUT1N)	GND	(PZKOUT2P)	(PZKOUT2N)	GND
17	GND	(PZKOUT3P)	(PZKOUT3N)	GND	(PZKOUTCKP)	(PZKOUTCKN)	GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND	HFCK04P	HFCK04N	GND
24	GND	HD1P	HD1N	GND	CKX1P	CKX1N	GND
25	GND	FLOE1P	FLOE1N	GND	VD1P	VD1N	GND

Mother Board
MB-1133 (4/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_4

4-147

MB-1133 (5/9)
SUFFIX: -12

CNT5

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND	RESET_3L	DC_ENBL	BD_EXT_SL5F	FORMAT	FUSE+12V	GND
6	GND	GND	GND	BD_EXT_SL5R		GND	GND
7	GND		GND			GND	GND
8	GND	SEL7	SEL8	GND			GND
9	GND	SEL5	SEL6	GND			GND
10	GND	SEL3	SEL4	GND			GND
11	GND	SEL1	SEL2	GND			GND
12							
13							
14							
15	GND			GND			GND
16	GND			GND			GND
17	GND	FCVOUT8P	FCVOUT8N	GND	FCVIN8P	FCVIN8N	GND
18	GND	FCVOUT7P	FCVOUT7N	GND	FCVIN7P	FCVIN7N	GND
19	GND	FCVOUT6P	FCVOUT6N	GND	FCVIN6P	FCVIN6N	GND
20	GND	FCVOUT5P	FCVOUT5N	GND	FCVIN5P	FCVIN5N	GND
21	GND	FCVOUT4P	FCVOUT4N	GND	FCVIN4P	FCVIN4N	GND
22	GND	FCVOUT3P	FCVOUT3N	GND	FCVIN3P	FCVIN3N	GND
23	GND	FCVOUT2P	FCVOUT2N	GND	FCVIN2P	FCVIN2N	GND
24	GND	FCVOUT1P	FCVOUT1N	GND	FCVIN1P	FCVIN1N	GND
25	GND			GND			GND

B M't

CNB52

	z	a	b	c	d	e	f
1	GND			GND			GND
2	GND			GND			GND
3	GND			GND			GND
4	GND			GND			GND
5	GND	DIN24BP	DIN24BN	GND	DIN32BP	DIN32BN	GND
6	GND	DIN23BP	DIN23BN	GND	DIN31BP	DIN31BN	GND
7	GND	DIN22BP	DIN22BN	GND	DIN30BP	DIN30BN	GND
8	GND	DIN21BP	DIN21BN	GND	DIN29BP	DIN29BN	GND
9	GND	DIN20BP	DIN20BN	GND	DIN28BP	DIN28BN	GND
10	GND	DIN19BP	DIN19BN	GND	DIN27BP	DIN27BN	GND
11	GND	DIN18BP	DIN18BN	GND	DIN26BP	DIN26BN	GND
12	GND	DIN17BP	DIN17BN	GND	DIN25BP	DIN25BN	GND
13	GND	DIN16BP	DIN16BN	GND			GND
14	GND			GND			GND
15	GND			GND			GND
16	GND			GND			GND
17	GND			GND			GND
18	GND			GND			GND
19	GND			GND			GND
20	GND			GND			GND
21	GND			GND			GND
22	GND			GND			GND

GNW5

	z	a	b	c	d	e	f
1	GND	FC1_HFCKAP	FC1_HFCKAN	GND	(FC1_HFCKBP)	(FC1_HFCKBN)	GND
2	GND	FC1_CKXAP	FC1_CKXAN	GND	(FC1_CKXBP)	(FC1_CKXBN)	GND
3	GND	FC1_VDAP	FC1_VDAN	GND	(FC1_VDBP)	(FC1_VDBN)	GND
4	GND	FC1_HDAP	FC1_HDAN	GND	(FC1_HDBP)	(FC1_HDBN)	GND
5	GND	FC1_FLOEAP	FC1_FLOEAN	GND	(FC1_FLOEBP)	(FC1_FLOEBN)	GND
6	GND			GND			GND
7	GND			GND			GND
8	GND			GND			GND
9	GND	GND	GND	GND			GND
10	GND	GND	REF_IN_FC1	GND			GND
11	GND	GND	GND	GND			GND

CNZ5

	Z	A	B	C	D	E	F
1	GND			GND			GND
2	GND			GND			GND
3	GND	PBUSOUT01	PBUSOUT02	GND	PBUSOUT03	PBUSOUT04	GND
4	GND	PBUSOUT05	PBUSOUT06	GND	PBUSOUT07	PBUSOUT08	GND
5	GND	PBUSOUT09	PBUSOUT10	GND	PBUSOUT11	PBUSOUT12	GND
6	GND	PBUSOUT13	PBUSOUT14	GND	PBUSOUT15	PBUSOUT16	GND
7	GND	PBUSOUT17	PBUSOUT18	GND	PBUSOUT19	PBUSOUT20	GND
8	GND	PBUSOUT21	PBUSOUT22	GND	PBUSOUT23	PBUSOUT24	GND
9	GND	PBUSOUT25	PBUSOUT26	GND	PBUSOUT27	PBUSOUT28	GND
10	GND	PBUSOUT29	PBUSOUT30	GND	PBUSOUT31	PBUSOUT32	GND
11	GND	PBUSOUT33	PBUSOUT34	GND	PBUSOUT35	PBUSOUT36	GND
12							
13							
14							
15	GND	PBUSOUT37	PBUSOUT38	GND	PBUSOUT39	PBUSOUT40	GND
16	GND	PBUSOUT41	PBUSOUT42	GND	PBUSOUT43	PBUSOUT44	GND
17	GND	PBUSOUT45	PBUSOUT46	GND	(PBUSOUT47)	(PBUSOUT48)	GND
18	GND	(PBUSOUT49)	(PBUSOUT50)	GND	(PBUSOUT51)	(PBUSOUT52)	GND
19	GND	PBUSOUT53	PBUSOUT54	GND	(PBUSOUT55)	(PBUSOUT56)	GND
20	GND	PBUSOUT57	PBUSOUT58	GND	PBUSOUT59	PBUSOUT60	GND
21	GND			GND			GND
22	GND			GND			GND
23	GND			GND	HFCK10P	HFCK10N	GND
24	GND	HD6P	HD6N	GND	CKX4P	CKX4N	GND
25	GND	FLOE4P	FLOE4N	GND	VD6P	VD6N	GND

Mother Board
MB-1133 (5/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_5

4-148

MVS-6000 MM

MB-1133 (6/9)
SUFFIX: -12

CNT6

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND	RESET_4L	DC_ENBL	BD_EXT_SL6F	FORMAT	FUSE+12V	GND
6	GND	GND	GND	BD_EXT_SL6R	GND	GND	GND
7	GND				GND	GND	GND
8	GND	INET7WTAP	INET7WTAN	GND	INET7WTBP	INET7WTBN	GND
9	GND	INET_WYTAP	INET_WYTAN	GND	INET_WYTBP	INET_WYTBN	GND
10	GND			GND			GND
11	GND	G_ETH1_LINK_LED	G_ETH1_ACT_LED	GND	RESERVE1	RESERVE2	GND
12							
13							
14							
15	GND			GND			GND
16	GND	G_ETH3P	G_ETH3N	GND	G_ETH4P	G_ETH4N	GND
17	GND	G_ETH1P	G_ETH1N	GND	G_ETH2P	G_ETH2N	GND
18	GND	G_ETH_100M_LED	G_ETH_1000M_LED	GND	RESERVE3	RESERVE4	GND
19	GND	MY_1.8V	MY_1.8V	GND	RESERVE5	RESERVE6	GND
20	GND			GND			GND
21	GND			GND			GND
22	GND	GND	GND	GND	GND	GND	GND
23	GND			GND			GND
24	GND			GND			GND
25	GND			GND			GND

B M't

CNB62

	z	a	b	c	d	e	f
1	GND	SEL7	SEL8	GND			GND
2	GND	SEL5	SEL6	GND			GND
3	GND	SEL3	SEL4	GND			GND
4	GND	SEL1	SEL2	GND			GND
5	GND	DIN09BP	DIN09BN	GND			GND
6	GND	DIN08BP	DIN08BN	GND			GND
7	GND	DIN07BP	DIN07BN	GND	DIN15BP	DIN15BN	GND
8	GND	DIN06BP	DIN06BN	GND	DIN14BP	DIN14BN	GND
9	GND	DIN05BP	DIN05BN	GND	DIN13BP	DIN13BN	GND
10	GND	DIN04BP	DIN04BN	GND	DIN12BP	DIN12BN	GND
11	GND	DIN03BP	DIN03BN	GND	DIN11BP	DIN11BN	GND
12	GND	DIN02BP	DIN02BN	GND	DIN10BP	DIN10BN	GND
13	GND	DIN01BP	DIN01BN	GND			GND
14	GND	FCVOUT8P	FCVOUT8N	GND	FCVIN8P	FCVIN8N	GND
15	GND	FCVOUT7P	FCVOUT7N	GND	FCVIN7P	FCVIN7N	GND
16	GND	FCVOUT6P	FCVOUT6N	GND	FCVIN6P	FCVIN6N	GND
17	GND	FCVOUT5P	FCVOUT5N	GND	FCVIN5P	FCVIN5N	GND
18	GND	FCVOUT4P	FCVOUT4N	GND	FCVIN4P	FCVIN4N	GND
19	GND	FCVOUT3P	FCVOUT3N	GND	FCVIN3P	FCVIN3N	GND
20	GND	FCVOUT2P	FCVOUT2N	GND	FCVIN2P	FCVIN2N	GND
21	GND	FCVOUT1P	FCVOUT1N	GND	FCVIN1P	FCVIN1N	GND
22	GND			GND			GND

CNY6

	z	a	b	c	d	e	f
1	GND	(CCROUT1VAP)	(CCROUT1VAN)	GND	CCRIN1VP	CCRIN1VN	GND
2	GND	CCROUT1VBP	CCROUT1VBN	GND			GND
3	GND	(CCROUT2VAP)	(CCROUT2VAN)	GND	CCRIN2VP	CCRIN2VN	GND
4	GND	CCROUT2VBP	CCROUT2VBN	GND			GND
5	GND			GND	MYIN1VP	MYIN1VN	GND
6	GND			GND			GND
7	GND	(MYOUT1VAP)	(MYOUT1VAN)	GND	MYIN2VP	MYIN2VN	GND
8	GND	MYOUT1VBP	MYOUT1VBN	GND			GND
9	GND	(MYOUT2VAP)	(MYOUT2VAN)	GND	(RE_MYIN9VP)	(RE_MYIN9VN)	GND
10	GND	MYOUT2VBP	MYOUT2VBN	GND			GND
11	GND	(MYOUT3VAP)	(MYOUT3VAN)	GND	(RE_MYIN10VP)	(RE_MYIN10VN)	GND
12	GND	MYOUT3VBP	MYOUT3VBN	GND			GND
13	GND	(MYOUT4VAP)	(MYOUT4VAN)	GND	(RE_MYIN7VP)	(RE_MYIN7VN)	GND
14	GND	MYOUT4VBP	MYOUT4VBN	GND			GND
15	GND	(MYOUT5VAP)	(MYOUT5VAN)	GND	(RE_MYIN8VP)	(RE_MYIN8VN)	GND
16	GND	MYOUT5VBP	MYOUT5VBN	GND			GND
17	GND	(MYOUT6VAP)	(MYOUT6VAN)	GND	(RE_MYIN5VP)	(RE_MYIN5VN)	GND
18	GND	MYOUT6VBP	MYOUT6VBN	GND			GND
19	GND	(MYOUT7VAP)	(MYOUT7VAN)	GND	(RE_MYIN6VP)	(RE_MYIN6VN)	GND
20	GND	MYOUT7VBP	MYOUT7VBN	GND			GND
21	GND	(MYOUT8VAP)	(MYOUT8VAN)	GND	MYIN3VP	MYIN3VN	GND
22	GND	MYOUT8VBP	MYOUT8VBN	GND			GND

CNZ6

	Z	A	B	C	D	E	F
1	GND			GND	MYIN4VP	MYIN4VN	GND
2	GND			GND			GND
3	GND	(PBUSMY01)	(PBUSMY02)	GND	(PBUSMY03)	(PBUSMY04)	GND
4	GND	(PBUSMY05)	(PBUSMY06)	GND	(PBUSMY07)	(PBUSMY08)	GND
5	GND	(PBUSMY09)	(PBUSMY10)	GND	(PBUSMY11)	(PBUSMY12)	GND
6	GND	(PBUSMY13)	(PBUSMY14)	GND	(PBUSMY15)	(PBUSMY16)	GND
7	GND	(PBUSMY17)	(PBUSMY18)	GND	(PBUSMY19)	(PBUSMY20)	GND
8	GND	(PBUSMY21)	(PBUSMY22)	GND	(PBUSMY23)	(PBUSMY24)	GND
9	GND	(PBUSMY25)	(PBUSMY26)	GND	(PBUSMY27)	(PBUSMY28)	GND
10	GND	(PBUSMY29)	(PBUSMY30)	GND	(PBUSMY31)	(PBUSMY32)	GND
11	GND	(PBUSMY33)	(PBUSMY34)	GND	(PBUSMY35)	(PBUSMY36)	GND
12							
13							
14							
15	GND	(PBUSMY37)	(PBUSMY38)	GND	(PBUSMY39)	(PBUSMY40)	GND
16	GND	(PBUSMY41)	(PBUSMY42)	GND	(PBUSMY43)	(PBUSMY44)	GND
17	GND	(PBUSMY45)	(PBUSMY46)	GND	(PBUSMY47)	(PBUSMY48)	GND
18	GND	(PBUSMY49)	(PBUSMY50)	GND	(PBUSMY51)	(PBUSMY52)	GND
19	GND	(PBUSMY53)	(PBUSMY54)	GND	(PBUSMY55)	(PBUSMY56)	GND
20	GND	(PBUSMY57)	(PBUSMY58)	GND	(PBUSMY59)	(PBUSMY60)	GND
21	GND	(PBUSMY61)	(PBUSMY62)	GND	(PBUSMY63)	(PBUSMY64)	GND
22	GND	(PBUSMY65)	(PBUSMY66)	GND	(PBUSMY67)	(PBUSMY68)	GND
23	GND	(PBUSMY69)	(PBUSMY70)	GND	HFCK06P	HFCK06N	GND
24	GND	HD4P	HD4N	GND	CKX2P	CKX2N	GND
25	GND	FLOE2P	FLOE2N	GND	VD4P	VD4N	GND

Mother Board
MB-1133 (6/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_6

MB-1133 (7/9)
SUFFIX: -12

B M't

CNT7

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND		DME_DC_ENBL	BD_EXT_SL7F	IFAN_CTRL)	DME_FUSE+12V	GND
6	GND						GND
7	GND	GND	GND				GND
8	GND	DME_RESET_1L	IRESET_2L)	GND	IRESET_3L)	IRESET_4L)	GND
9	GND	IFAN_RE_ERR)	IFAN_RF_ERR)	GND	IFAN_RG_ERR)	IFAN_RH_ERR)	GND
10	GND	FAN_RA_ERR	IFAN_RB_ERR)	GND	IFAN_RC_ERR)	IFAN_RD_ERR)	GND
11	GND	DME_FORMAT	IACERROR0)	GND	IDCERROR0)	IFANERROR0)	GND
12							
13							
14							
15	GND	IFAN_RE_ERR)	IFAN_RF_ERR)	GND	IFAN_RK_ERR)	IFAN_RL_ERR)	GND
16	GND	PSEXIST1	ACERROR1	GND	DCERROR1	FANERROR1	GND
17	GND	IGLED1)	IRLED1)	GND	IRS+ (1))	IGNDRS- (1))	GND
18	GND	PSEXIST2	ACERROR2	GND	DCERROR2	FANERROR2	GND
19	GND	IGLED2)	IRLED2)	GND	IRS+ (2))	IGNDRS- (2))	GND
20	GND	IPSEXIST3)	IACERROR3)	GND	IDCERROR3)	IFANERROR3)	GND
21	GND	IGLED3)	IRLED3)	GND	IRS+ (3))	IGNDRS- (3))	GND
22	GND	IPSEXIST4)	IACERROR4)	GND	IDCERROR4)	IFANERROR4)	GND
23	GND	IGLED4)	IRLED4)	GND	IRS+ (4))	IGNDRS- (4))	GND
24	GND	IPSEXIST5)	IACERROR5)	GND	IDCERROR5)	IFANERROR5)	GND
25	GND	IGLED5)	IRLED5)	GND	IRS+ (5))	IGNDRS- (5))	GND

CNB74

	Z	A	B	C	D	E	F
1	GND						GND
2	GND						GND
3	GND						GND
4	GND						GND
5	GND						GND
6	GND			BD_EXT_SL7R			GND
7	GND						GND
8	GND			GND			GND
9	GND			GND			GND
10	GND	DME_CTRL_LINK_LED	DME_CTRL_ACT_LED	GND	DME_DATA_LINK_LED	DME_DATA_ACT_LED	GND
11	GND	G_ETH1_LINK_LED	G_ETH1_ACT_LED	GND	RESERVE1	RESERVE2	GND
12							
13							
14							
15	GND			GND			GND
16	GND	G_ETH3P	G_ETH3N	GND	G_ETH4P	G_ETH4N	GND
17	GND	G_ETH1P	G_ETH1N	GND	G_ETH2P	G_ETH2N	GND
18	GND	G_ETH_100M_LED	G_ETH_1000M_LED	GND	RESERVE3	RESERVE4	GND
19	GND	MY_1.8V	MY_1.8V	GND	RESERVE5	RESERVE6	GND
20	GND			GND			GND
21	GND			GND			GND
22	GND	GND	GND	GND	GND	GND	GND
23	GND			GND			GND
24	GND			GND			GND
25	GND			GND			GND

CNV7

	z	a	b	c	d	e	f
1	GND	GND	GND	GND	GND	GND	GND
2	GND	GPIIN1	GPIIN2	GND	GPIIN3	GPIIN4	GND
3	GND	GPIIN5	GPIIN6	GND	GPIIN7	GPIIN8	GND
4	GND	IGPIOUT1A)	IGPIOUT1B)	GND	IGPIOUT2A)	IGPIOUT2B)	GND
5	GND	IGPIOUT3A)	IGPIOUT3B)	GND	IGPIOUT4A)	IGPIOUT4B)	GND
6	GND	IGPIOUT5)	IGPIOUT6)	GND	IGPIOUT7)	IGPIOUT8)	GND
7	GND	GND IGPICOM1)	GND IGPICOM2)	GND	GND IGPICOM3)	GND IGPICOM4)	GND
8	GND	GND	GND	GND	GND	GND	GND
9	GND	IRS232CTX)	IRS232CRX)	GND			GND
10	GND	GND	GND	GND	GND	GND	GND
11	GND	RS422TX1P (REMOTE3)	RS422TX1N (REMOTE3)	GND	RS422RX1P (REMOTE3)	RS422RX1N (REMOTE3)	GND
12	GND	GND	GND	GND	GND	GND	GND
13	GND	RS422TX2P (REMOTE4)	RS422TX2N (REMOTE4)	GND	RS422RX2P (REMOTE4)	RS422RX2N (REMOTE4)	GND
14	GND	GND	GND	GND	GND	GND	GND
15	GND	IRS422TX3P)	IRS422TX3N)	GND	IRS422RX3P)	IRS422RX3N)	GND
16	GND	GND	GND	GND	GND	GND	GND
17	GND	IRS422TX4P)	IRS422TX4N)	GND	IRS422RX4P)	IRS422RX4N)	GND
18	GND	GND	GND	GND	GND	GND	GND
19	GND	IRS422VT1P)	IRS422VT1N)	GND	IRS422VT2P)	IRS422VT2N)	GND
20	GND	GND	GND	GND	GND	GND	GND
21	GND	DME_MB_3V	DME_MB_3V	GND	DME_MB_SCL	DME_MB_SDA	GND
22	GND	GND	GND	GND	GND	GND	GND

CNY7

	z	a	b	c	d	e	f
1	GND	GND	GND	GND	GND	GND	GND
2	GND	GND		GND	GND	REF_IN_DME_CA	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	GND		GND	GND	IREF_OUT)	GND
5	GND	GND	GND	GND	GND	GND	GND
6	GND		GND	GND		GND	GND
7	GND		GND	GND			GND
8	GND	IBD_EXT_SL16F)	IBD_EXT_SL16R)	GND	BD_EXT_SL8F	BD_EXT_SL8R	GND
9	GND	IBD_EXT_SL15F)	IBD_EXT_SL15R)	GND	BD_EXT_SL7F	BD_EXT_SL7R	GND
10	GND	IBD_EXT_SL14F)	IBD_EXT_SL14R)	GND	BD_EXT_SL6F	BD_EXT_SL6R	GND
11	GND	IBD_EXT_SL13F)	IBD_EXT_SL13R)	GND	BD_EXT_SL5F	BD_EXT_SL5R	GND
12	GND	IBD_EXT_SL12F)	IBD_EXT_SL12R)	GND	BD_EXT_SL4F	BD_EXT_SL4R	GND
13	GND	IBD_EXT_SL11F)	IBD_EXT_SL11R)	GND	BD_EXT_SL3F	BD_EXT_SL3R	GND
14	GND	IBD_EXT_SL10F)	IBD_EXT_SL10R)	GND	BD_EXT_SL2F	BD_EXT_SL2R	GND
15	GND	IBD_EXT_SL9F)	IBD_EXT_SL9R)	GND	BD_EXT_SL1F	BD_EXT_SL1R	GND
16	GND	DME_CTRL_LINK_LED	DME_CTRL_ACT_LED	GND	DME_DATA_LINK_LED	DME_DATA_ACT_LED	GND
17	GND	IHFCK32P)	IHFCK32N)	GND	IHFCK30P)	IHFCK30N)	GND
18	GND	IHFCK29P)	IHFCK29N)	GND	IHFCK28P)	IHFCK28N)	GND
19	GND	IHFCK27P)	IHFCK27N)	GND	IHFCK25P)	IHFCK28N)	GND
20	GND	IHFCK23P)	IHFCK23N)	GND	IHFCK19P)	IHFCK19N)	GND
21	GND	IHFCK17P)	IHFCK17N)	GND	IHFCK15P)	IHFCK15N)	GND
22	GND	IHFCK13P)	IHFCK13N)	GND	IHFCK11P)	IHFCK11N)	GND

CNW7

	Z	A	B	C	D	E	F
1	GND	GND	GND	GND	GND	GND	GND
2	GND	ETH1_TDP (DME_CTRL)	ETH1_TDN (DME_CTRL)	GND	ETH1_RDP (DME_CTRL)	ETH1_RDN (DME_CTRL)	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	ETH2_TDP (DME_DATA)	ETH2_TDN (DME_DATA)	GND	ETH2_RDP (DME_DATA)	ETH2_RDN (DME_DATA)	GND
5	GND	GND	GND	GND	GND	GND	GND
6	GND	BUS_A0	BUS_A1	GND	BUS_A2	BUS_A3	GND
7	GND	BUS_A4	BUS_A5	GND	BUS_A6	BUS_A7	GND
8	GND	BUS_A8	BUS_A9	GND	BUS_A10	BUS_A11	GND
9	GND	BUS_A12	BUS_A13	GND	BUS_A14	BUS_A15	GND
10	GND	BUS_OE	BUS_WE	GND	BUS_CS1	BUS_CS2	GND
11	GND	BUS_CS3	BUS_CS4	GND	BUS_CS5	BUS_CSX	GND
12							
13							
14							
15	GND	BUS_D0	BUS_D1	GND	BUS_D2	BUS_D3	GND
16	GND	BUS_D4	BUS_D5	GND	BUS_D6	BUS_D7	GND
17	GND	BUS_D8	BUS_D9	GND	BUS_D10	BUS_D11	GND
18	GND	BUS_D12	BUS_D13	GND	BUS_D14	BUS_D15	GND
19	GND	BUS_INT	BUS_BUSY	GND	BUS_UB	BUS_LB	GND
20	GND	IRESERVE_IN1)	IRESERVE_IN2)	GND	IRESERVE_IN3)	IRESERVE_IN4)	GND
21	GND	FLOE8P	FLOE8N	GND		GND IDWE)	GND
22	GND	DME_INET7WTAP	DME_INET7WTAN	GND	DME_INET7WTBP	DME_INET7WTBN	GND
23	GND	IINET8WTAP)	IINET8WTAN)	GND	IINET8WTBP)	IINET8WTBN)	GND
24	GND	IINET9WTAP)	IINET9WTAN)	GND	IINET9WTBP)	IINET9WTBN)	GND
25	GND	IINET10WTAP)	IINET10WTAN)	GND	IINET10WTBP)	IINET10WTBN)	GND

CNZ7

	Z	A	B	C	D	E	F
1	GND	IHFCK10P)	IHFCK10N)	GND	IHFCK08P)	IHFCK08N)	GND
2	GND	IHFCK06P)	IHFCK06N)	GND	IHFCK04P)	IHFCK04N)	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	ICKX8P)	ICKX8N)	GND	ICKX7P)	ICKX7N)	GND
5	GND	IFLOE8P)	IFLOE8N)	GND	IFLOE7P)	IFLOE7N)	GND
6	GND	ICKX6P)	ICKX6N)	GND	ICKX5P)	ICKX5N)	GND
7	GND	IFLOE6P)	IFLOE6N)	GND	IFLOE5P)	IFLOE5N)	GND
8	GND	ICKX4P)	ICKX4N)	GND	ICKX3P)	ICKX3N)	GND
9	GND	IFLOE4P)	IFLOE4N)	GND	IFLOE3P)	IFLOE3N)	GND
10	GND	ICKX2P)	ICKX2N)	GND	ICKX1P)	ICKX1N)	GND
11	GND	IFLOE2P)	IFLOE2N)	GND	IFLOE1P)	IFLOE1N)	GND
12							
13							
14							
15	GND	IHD8P)	IHD8N)	GND	IHD7P)	IHD7N)	GND
16	GND	IVD8P)	IVD8N)	GND	IVD7P)	IVD7N)	GND
17	GND	IHD6P)	IHD6N)	GND	IHD5P)	IHD5N)	GND
18	GND	IVD6P)	IVD6N)	GND	IVD5P)	IVD5N)	GND
19	GND	IHD4P)	IHD4N)	GND	IHD3P)	IHD3N)	GND
20	GND	IVD4P)	IVD4N)	GND	IVD3P)	IVD3N)	GND
21	GND	IHD2P)	IHD2N)	GND	IHD1P)	IHD1N)	GND
22	GND	IVD2P)	IVD2N)	GND	IVD1P)	IVD1N)	GND
23	GND	GND	GND	GND	GND	GND	GND
24	GND	IFAN_LE_ERR)	IFAN_LF_ERR)	GND	VD2P	VD2N	GND
25	GND	FAN_LA_ERR	IFAN_LB_ERR)	GND	IFAN_LC_ERR)	IFAN_LD_ERR)	GND

Mother Board
MB-1133 (7/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_7

4-150

MVS-6000 MM

MB-1133 (8/9)
SUFFIX: -12

CNT8

	Z	A	B	C	D	E	F
1	GND	+12V	+12V		+12V	+12V	GND
2	GND	+12V	+12V		+12V	+12V	GND
3	GND	+12V	+12V		+12V	+12V	GND
4	GND	+12V	+12V		+12V	+12V	GND
5	GND		DC_ENBL	BD_EXT_SL8F	FAN_CTRL	FUSE+12V	GND
6	GND		GND	BD_EXT_SL8R	GND	GND	GND
7	GND		GND		GND		GND
8	GND	RESET_1L	RESET_2L	GND	RESET_3L	RESET_4L	GND
9	GND	(FAN_RE_ERR)	(FAN_RF_ERR)	GND	(FAN_RG_ERR)	(FAN_RH_ERR)	GND
10	GND	FAN_RA_ERR	(FAN_RB_ERR)	GND	(FAN_RC_ERR)	(FAN_RD_ERR)	GND
11	GND	FORMAT	(ACERROR0)	GND	(DCERROR0)	(FANERROR0)	GND
12							
13							
14							
15	GND	(FAN_RE_ERR)	(FAN_RF_ERR)	GND	(FAN_RK_ERR)	(FAN_RL_ERR)	GND
16	GND	PSEXIST1	ACERROR1	GND	DCERROR1	FANERROR1	GND
17	GND	GLED1	RLED1	GND	(RS+ (1))	(GNDRS- (1))	GND
18	GND	PSEXIST2	ACERROR2	GND	DCERROR2	FANERROR2	GND
19	GND	GLED2	RLED2	GND	(RS+ (2))	(GNDRS- (2))	GND
20	GND	(PSEXIST3)	(ACERROR3)	GND	(DCERROR3)	(FANERROR3)	GND
21	GND	(GLED3)	(RLED3)	GND	(RS+ (3))	(GNDRS- (3))	GND
22	GND	(PSEXIST4)	(ACERROR4)	GND	(DCERROR4)	(FANERROR4)	GND
23	GND	(GLED4)	(RLED4)	GND	(RS+ (4))	(GNDRS- (4))	GND
24	GND	(PSEXIST5)	(ACERROR5)	GND	(DCERROR5)	(FANERROR5)	GND
25	GND	(GLED5)	(RLED5)	GND	(RS+ (5))	(GNDRS- (5))	GND

CNV8

	z	a	b	c	d	e	f
1	GND	GND	GND	GND	GND	GND	GND
2	GND	GPIIN1	GPIIN2	GND	GPIIN3	GPIIN4	GND
3	GND	GPIIN5	GPIIN6	GND	GPIIN7	GPIIN8	GND
4	GND	GPIOUT1A	GPIOUT1B	GND	GPIOUT2A	GPIOUT2B	GND
5	GND	GPIOUT3A	GPIOUT3B	GND	GPIOUT4A	GPIOUT4B	GND
6	GND	GPIOUT5	GPIOUT6	GND	GPIOUT7	GPIOUT8	GND
7	GND	GND (GPICOM1)	GND (GPICOM2)	GND	GND (GPICOM3)	GND (GPICOM4)	GND
8	GND	GND	GND	GND	GND	GND	GND
9	GND	(RS232CTX)	(RS232CRX)	GND			GND
10	GND	GND	GND	GND	GND	GND	GND
11	GND	RS422TX1P (REMOTE1)	RS422TX1N (REMOTE1)	GND	RS422RX1P (REMOTE1)	RS422RX1N (REMOTE1)	GND
12	GND	GND	GND	GND	GND	GND	GND
13	GND	RS422TX2P (REMOTE2)	RS422TX2N (REMOTE2)	GND	RS422RX2P (REMOTE2)	RS422RX2N (REMOTE2)	GND
14	GND	GND	GND	GND	GND	GND	GND
15	GND	(RS422TX3P)	(RS422TX3N)	GND	(RS422RX3P)	(RS422RX3N)	GND
16	GND	GND	GND	GND	GND	GND	GND
17	GND	(RS422TX4P)	(RS422TX4N)	GND	(RS422RX4P)	(RS422RX4N)	GND
18	GND	GND	GND	GND	GND	GND	GND
19	GND	(RS422VT1P)	(RS422VT1N)	GND	(RS422VT2P)	(RS422VT2N)	GND
20	GND	GND	GND	GND	GND	GND	GND
21	GND	MB_3V	MB_3V	GND	MB_SCL	MB_SDA	GND
22	GND	GND	GND	GND	GND	GND	GND

CNW8

	Z	A	B	C	D	E	F
1	GND	GND	GND	GND	GND	GND	GND
2	GND	ETH1_TDP (CTRL)	ETH1_TDN (CTRL)	GND	ETH1_RDP (CTRL)	ETH1_RDN (CTRL)	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	ETH2_TDP (DATA)	ETH2_TDN (DATA)	GND	ETH2_RDP (DATA)	ETH2_RDN (DATA)	GND
5	GND	GND	GND	GND	GND	GND	GND
6	GND	(BUS_A0)	(BUS_A1)	GND	(BUS_A2)	(BUS_A3)	GND
7	GND	(BUS_A4)	(BUS_A5)	GND	(BUS_A6)	(BUS_A7)	GND
8	GND	(BUS_A8)	(BUS_A9)	GND	(BUS_A10)	(BUS_A11)	GND
9	GND	(BUS_A12)	(BUS_A13)	GND	(BUS_A14)	(BUS_A15)	GND
10	GND	(BUS_OE)	(BUS_WE)	GND	(BUS_CS1)	(BUS_CS2)	GND
11	GND	(BUS_CS3)	(BUS_CS4)	GND	(BUS_CS5)	(RESERVE_OUT1)	GND
12							
13							
14							
15	GND	(BUS_D0)	(BUS_D1)	GND	(BUS_D2)	(BUS_D3)	GND
16	GND	(BUS_D4)	(BUS_D5)	GND	(BUS_D6)	(BUS_D7)	GND
17	GND	(BUS_D8)	(BUS_D9)	GND	(BUS_D10)	(BUS_D11)	GND
18	GND	(BUS_D12)	(BUS_D13)	GND	(BUS_D14)	(BUS_D15)	GND
19	GND	(BUS_INT)	(BUS_BUSY)	GND	(BUS_UB)	(BUS_LB)	GND
20	GND	(RESERVE_IN1)	(RESERVE_IN2)	GND	(RESERVE_IN3)	(RESERVE_IN4)	GND
21	GND			GND		(OPEN SW*r)	GND
22	GND	INET7WTAP	INET7WTAN	GND	INET7WTBP	INET7WTBN	GND
23	GND	(INET8WTAP)	(INET8WTAN)	GND	(INET8WTBP)	(INET8WTBN)	GND
24	GND	INET9WTAP	INET9WTAN	GND	INET9WTBP	INET9WTBN	GND
25	GND	INET10WTAP	INET10WTAN	GND	INET10WTBP	INET10WTBN	GND

CNY8

	z	a	b	c	d	e	f
1	GND	GND	GND	GND	GND	GND	GND
2	GND	GND	REF_IN_FC1	GND	GND	REF_IN_BB	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	GND	REF_IN_DME_CA	GND	GND		GND
5	GND	GND	GND	GND	GND	GND	GND
6	GND		GND	GND		GND	GND
7	GND		GND	GND			GND
8	GND	(BD_EXT_SL16F)	(BD_EXT_SL16R)	GND	BD_EXT_SL8F	BD_EXT_SL8R	GND
9	GND	(BD_EXT_SL15F)	(BD_EXT_SL15R)	GND	BD_EXT_SL7F	BD_EXT_SL7R	GND
10	GND	(BD_EXT_SL14F)	(BD_EXT_SL14R)	GND	BD_EXT_SL6F	BD_EXT_SL6R	GND
11	GND	(BD_EXT_SL13F)	(BD_EXT_SL13R)	GND	BD_EXT_SL5F	BD_EXT_SL5R	GND
12	GND	(BD_EXT_SL12F)	(BD_EXT_SL12R)	GND	BD_EXT_SL4F	BD_EXT_SL4R	GND
13	GND	(BD_EXT_SL11F)	(BD_EXT_SL11R)	GND	BD_EXT_SL3F	BD_EXT_SL3R	GND
14	GND	(BD_EXT_SL10F)	(BD_EXT_SL10R)	GND	BD_EXT_SL2F	BD_EXT_SL2R	GND
15	GND	(BD_EXT_SL9F)	(BD_EXT_SL9R)	GND	BD_EXT_SL1F	BD_EXT_SL1R	GND
16	GND	CTRL_LINK_LED	CTRL_ACT_LED	GND	DATA_LINK_LED	DATA_ACT_LED	GND
17	GND	(HFCK32P)	(HFCK32N)	GND	(HFCK30P)	(HFCK30N)	GND
18	GND	(HFCK29P)	(HFCK29N)	GND	(HFCK28P)	(HFCK28N)	GND
19	GND	(HFCK27P)	(HFCK27N)	GND	(HFCK25P)	(HFCK25N)	GND
20	GND	(HFCK23P)	(HFCK23N)	GND	(HFCK19P)	(HFCK19N)	GND
21	GND	(HFCK17P)	(HFCK17N)	GND	HFCK15P	HFCK15N	GND
22	GND	(HFCK13P)	(HFCK13N)	GND	HFCK11P	HFCK11N	GND


CNZ8


	Z	A	B	C	D	E	F
1	GND	HFCK10P	HFCK10N	GND	HFCK08P	HFCK08N	GND
2	GND	HFCK06P	HFCK06N	GND	HFCK04P	HFCK04N	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	(CKX8P)	(CKX8N)	GND	CKX7P	CKX7N	GND
5	GND	FLOE8P	FLOE8N	GND	FLOE7P	FLOE7N	GND
6	GND	(CKX6P)	(CKX6N)	GND	CKX5P	CKX5N	GND
7	GND	(FLOE6P)	(FLOE6N)	GND	FLOE5P	FLOE5N	GND
8	GND	CKX4P	CKX4N	GND	CKX3P	CKX3N	GND
9	GND	FLOE4P	FLOE4N	GND	FLOE3P	FLOE3N	GND
10	GND	CKX2P	CKX2N	GND	CKX1P	CKX1N	GND
11	GND	FLOE2P	FLOE2N	GND	FLOE1P	FLOE1N	GND
12							
13							
14							
15	GND	(HD8P)	(HD8N)	GND	HD7P	HD7N	GND
16	GND	(VD8P)	(VD8N)	GND	VD7P	VD7N	GND
17	GND	HD6P	HD6N	GND	HD5P	HD5N	GND
18	GND	VD6P	VD6N	GND	VD5P	VD5N	GND
19	GND	HD4P	HD4N	GND	HD3P	HD3N	GND
20	GND	VD4P	VD4N	GND	VD3P	VD3N	GND
21	GND	(HD2P)	(HD2N)	GND	HD1P	HD1N	GND
22	GND	VD2P	VD2N	GND	VD1P	VD1N	GND
23	GND	GND	GND	GND	GND	GND	GND
24	GND	(FAN_LE_ERR)	(FAN_LF_ERR)	GND	(VD_INP)	(VD_INN)	GND
25	GND	FAN_LA_ERR	(FAN_LB_ERR)	GND	(FAN_LC_ERR)	(FAN_LD_ERR)	GND


Mother Board
MB-1133 (8/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_8

4-151

MB-1133 (9/9)
SUFFIX: -12

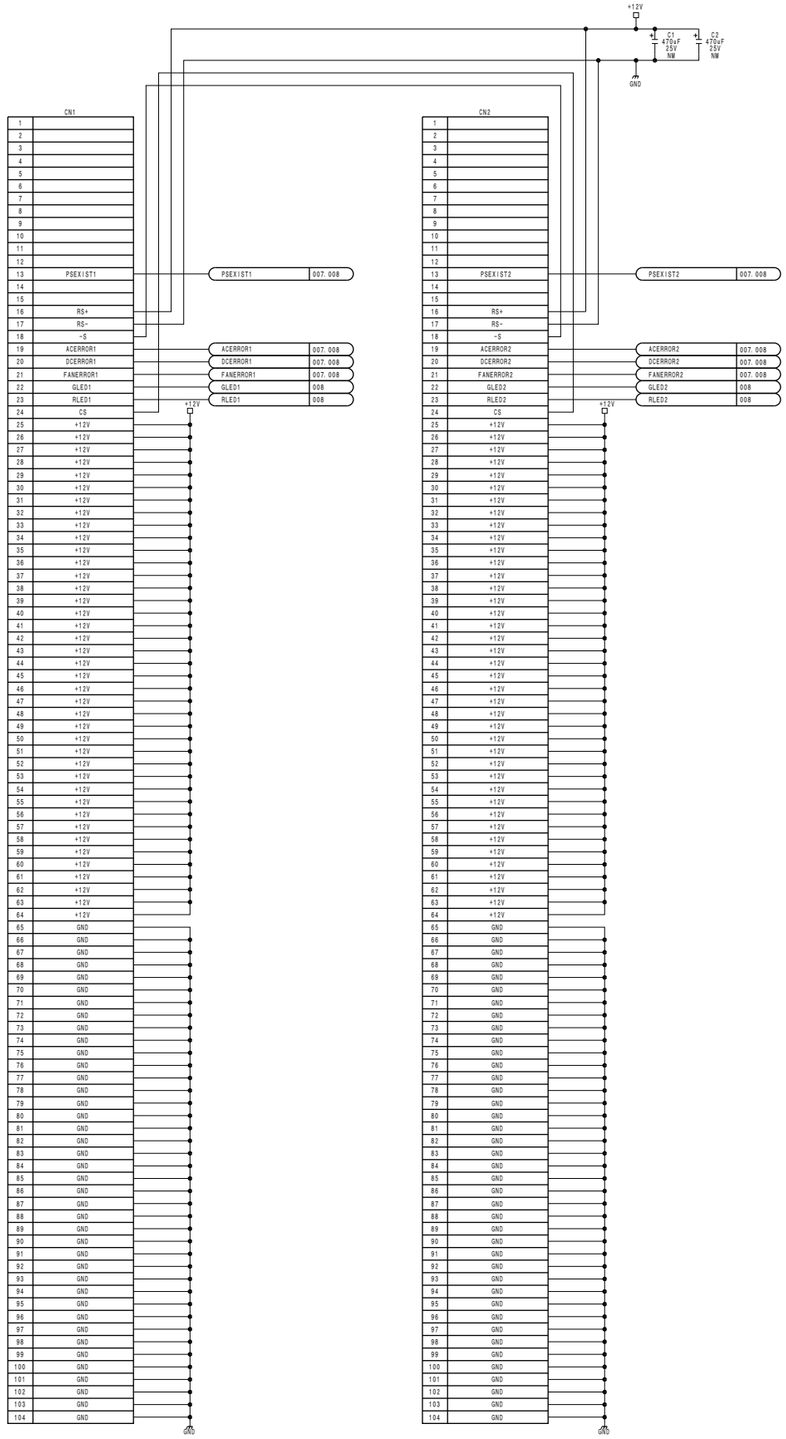

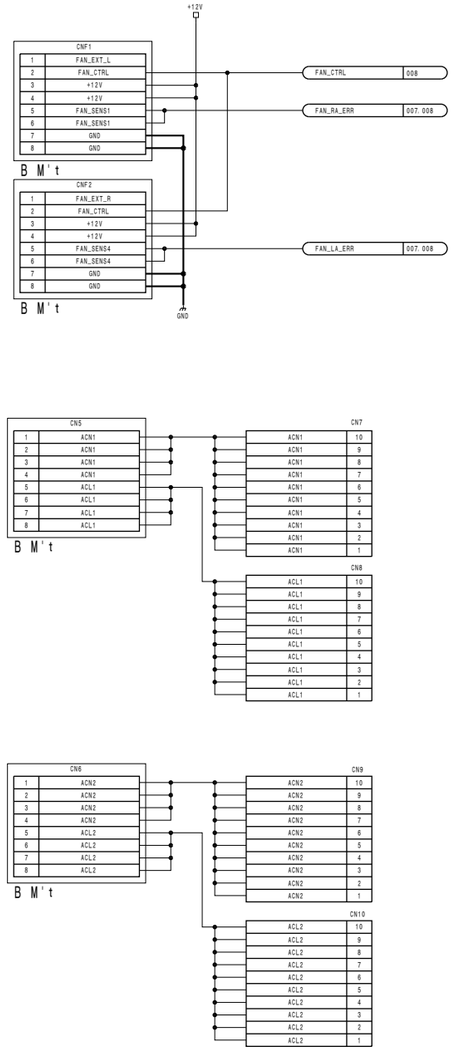

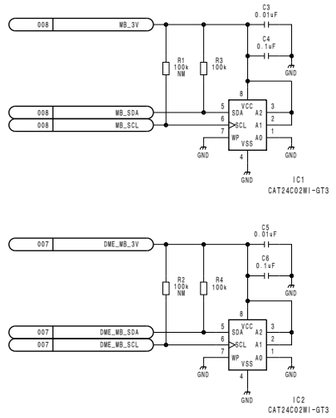

Mother Board
MB-1133 (9/9)
BOARD NO. 1-877-219-12
MVS-6000_MB-1133_002_9

MIX-52 (1/40)
SUFFIX: -12

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_L	DC_ENBL	GND	(FORMAT)	FUSE+12V	GND
6	SLOT_ID7	SLOT_ID6	(BD_EXT_SLR)	SLOT_ID5	SLOT_ID4	GND
7	SLOT_ID3	SLOT_ID2		SLOT_ID1	SLOT_ID0	GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNX1

	a	b	c	d	e	FG
1			GND	ME1_SR4KP	ME1_SR4KN	GND
2			GND	ME1_FL4VP	ME1_FL4VN	GND
3			GND	ME1_SR3KP	ME1_SR3KN	GND
4			GND	ME1_FL3VP	ME1_FL3VN	GND
5			GND	ME1_SR2KP	ME1_SR2KN	GND
6			GND	ME1_FL2VP	ME1_FL2VN	GND
7			GND	ME1_SR1KP	ME1_SR1KN	GND
8			GND	ME1_FL1VP	ME1_FL1VN	GND
9	ME1_OUT3VP	ME1_OUT3VN	GND			GND
10	ME1_OUT2VP	ME1_OUT2VN	GND			GND
11	ME1_OUT1VP	ME1_OUT1VN	GND			GND
12						GND
13						GND
14						GND
15			GND	PP_SR4KP	PP_SR4KN	GND
16			GND	PP_FL4VP	PP_FL4VN	GND
17			GND	PP_SR3KP	PP_SR3KN	GND
18			GND	PP_FL3VP	PP_FL3VN	GND
19			GND	PP_SR2KP	PP_SR2KN	GND
20			GND	PP_FL2VP	PP_FL2VN	GND
21			GND	PP_SR1KP	PP_SR1KN	GND
22			GND	PP_FL1VP	PP_FL1VN	GND
23	PP_BGCLVP	PP_BGCLVN	GND			GND
24	ME1_OUT4VP	ME1_OUT4VN	GND			GND
25	PP_OUT4VP	PP_OUT4VN	GND			GND

CNV1

	a	b	c	d	e	FG
1	SEND1V1P	SEND1V1N	GND	SEND1V2P	SEND1V2N	GND
2	SEND1V3P	SEND1V3N	GND	SEND1V4P	SEND1V4N	GND
3	SENDK1P	SENDK1N	GND	SENDK2P	SENDK2N	GND
4	SENDK3P	SENDK3N	GND	SENDK4P	SENDK4N	GND
5	SEND2V1P	SEND2V1N	GND	SEND2V2P	SEND2V2N	GND
6	SEND2V3P	SEND2V3N	GND	SEND2V4P	SEND2V4N	GND
7			GND			GND
8			GND	ME1_UTIL2P	ME1_UTIL2N	GND
9			GND	ME1_UTIL1P	ME1_UTIL1N	GND
10			GND	ME1_BGB_P	ME1_BGB_N	GND
11			GND	ME1_BGA_P	ME1_BGA_N	GND
12			GND	PP_UTIL2P	PP_UTIL2N	GND
13			GND	PP_UTIL1P	PP_UTIL1N	GND
14			GND	PP_BGB_P	PP_BGB_N	GND
15			GND	PP_BGA_P	PP_BGA_N	GND
16	PP_OUT3VP	PP_OUT3VN	GND			GND
17	PP_OUT2VP	PP_OUT2VN	GND			GND
18	PP_OUT1VP	PP_OUT1VN	GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND


CNZ1

	a	b	c	d	e	FG
1	EFFIN1V1P	EFFIN1V1N	GND	EFFIN1V2P	EFFIN1V2N	GND
2	EFFIN1V3P	EFFIN1V3N	GND	EFFIN1V4P	EFFIN1V4N	GND
3			GND			GND
4			GND			GND
5	EFFINK1P	EFFINK1N	GND	EFFINK2P	EFFINK2N	GND
6	EFFINK3P	EFFINK3N	GND	EFFINK4P	EFFINK4N	GND
7			GND			GND
8			GND			GND
9	EFFIN2V1P	EFFIN2V1N	GND	EFFIN2V2P	EFFIN2V2N	GND
10	EFFIN2V3P	EFFIN2V3N	GND	EFFIN2V4P	EFFIN2V4N	GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16	INETMTAP	INETMTAN	GND	INETMTBP	INETMTBN	GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND	HFCKP	HFCKN	GND
24	HDP	HDN	GND	CKXP	CKXN	GND
25	FLOEP	FLOEN	GND	VDP	VDN	GND

Mix/Effect Board
MIX-52 (1/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_1

4-153

MIX-52 (2/40)
SUFFIX: -12

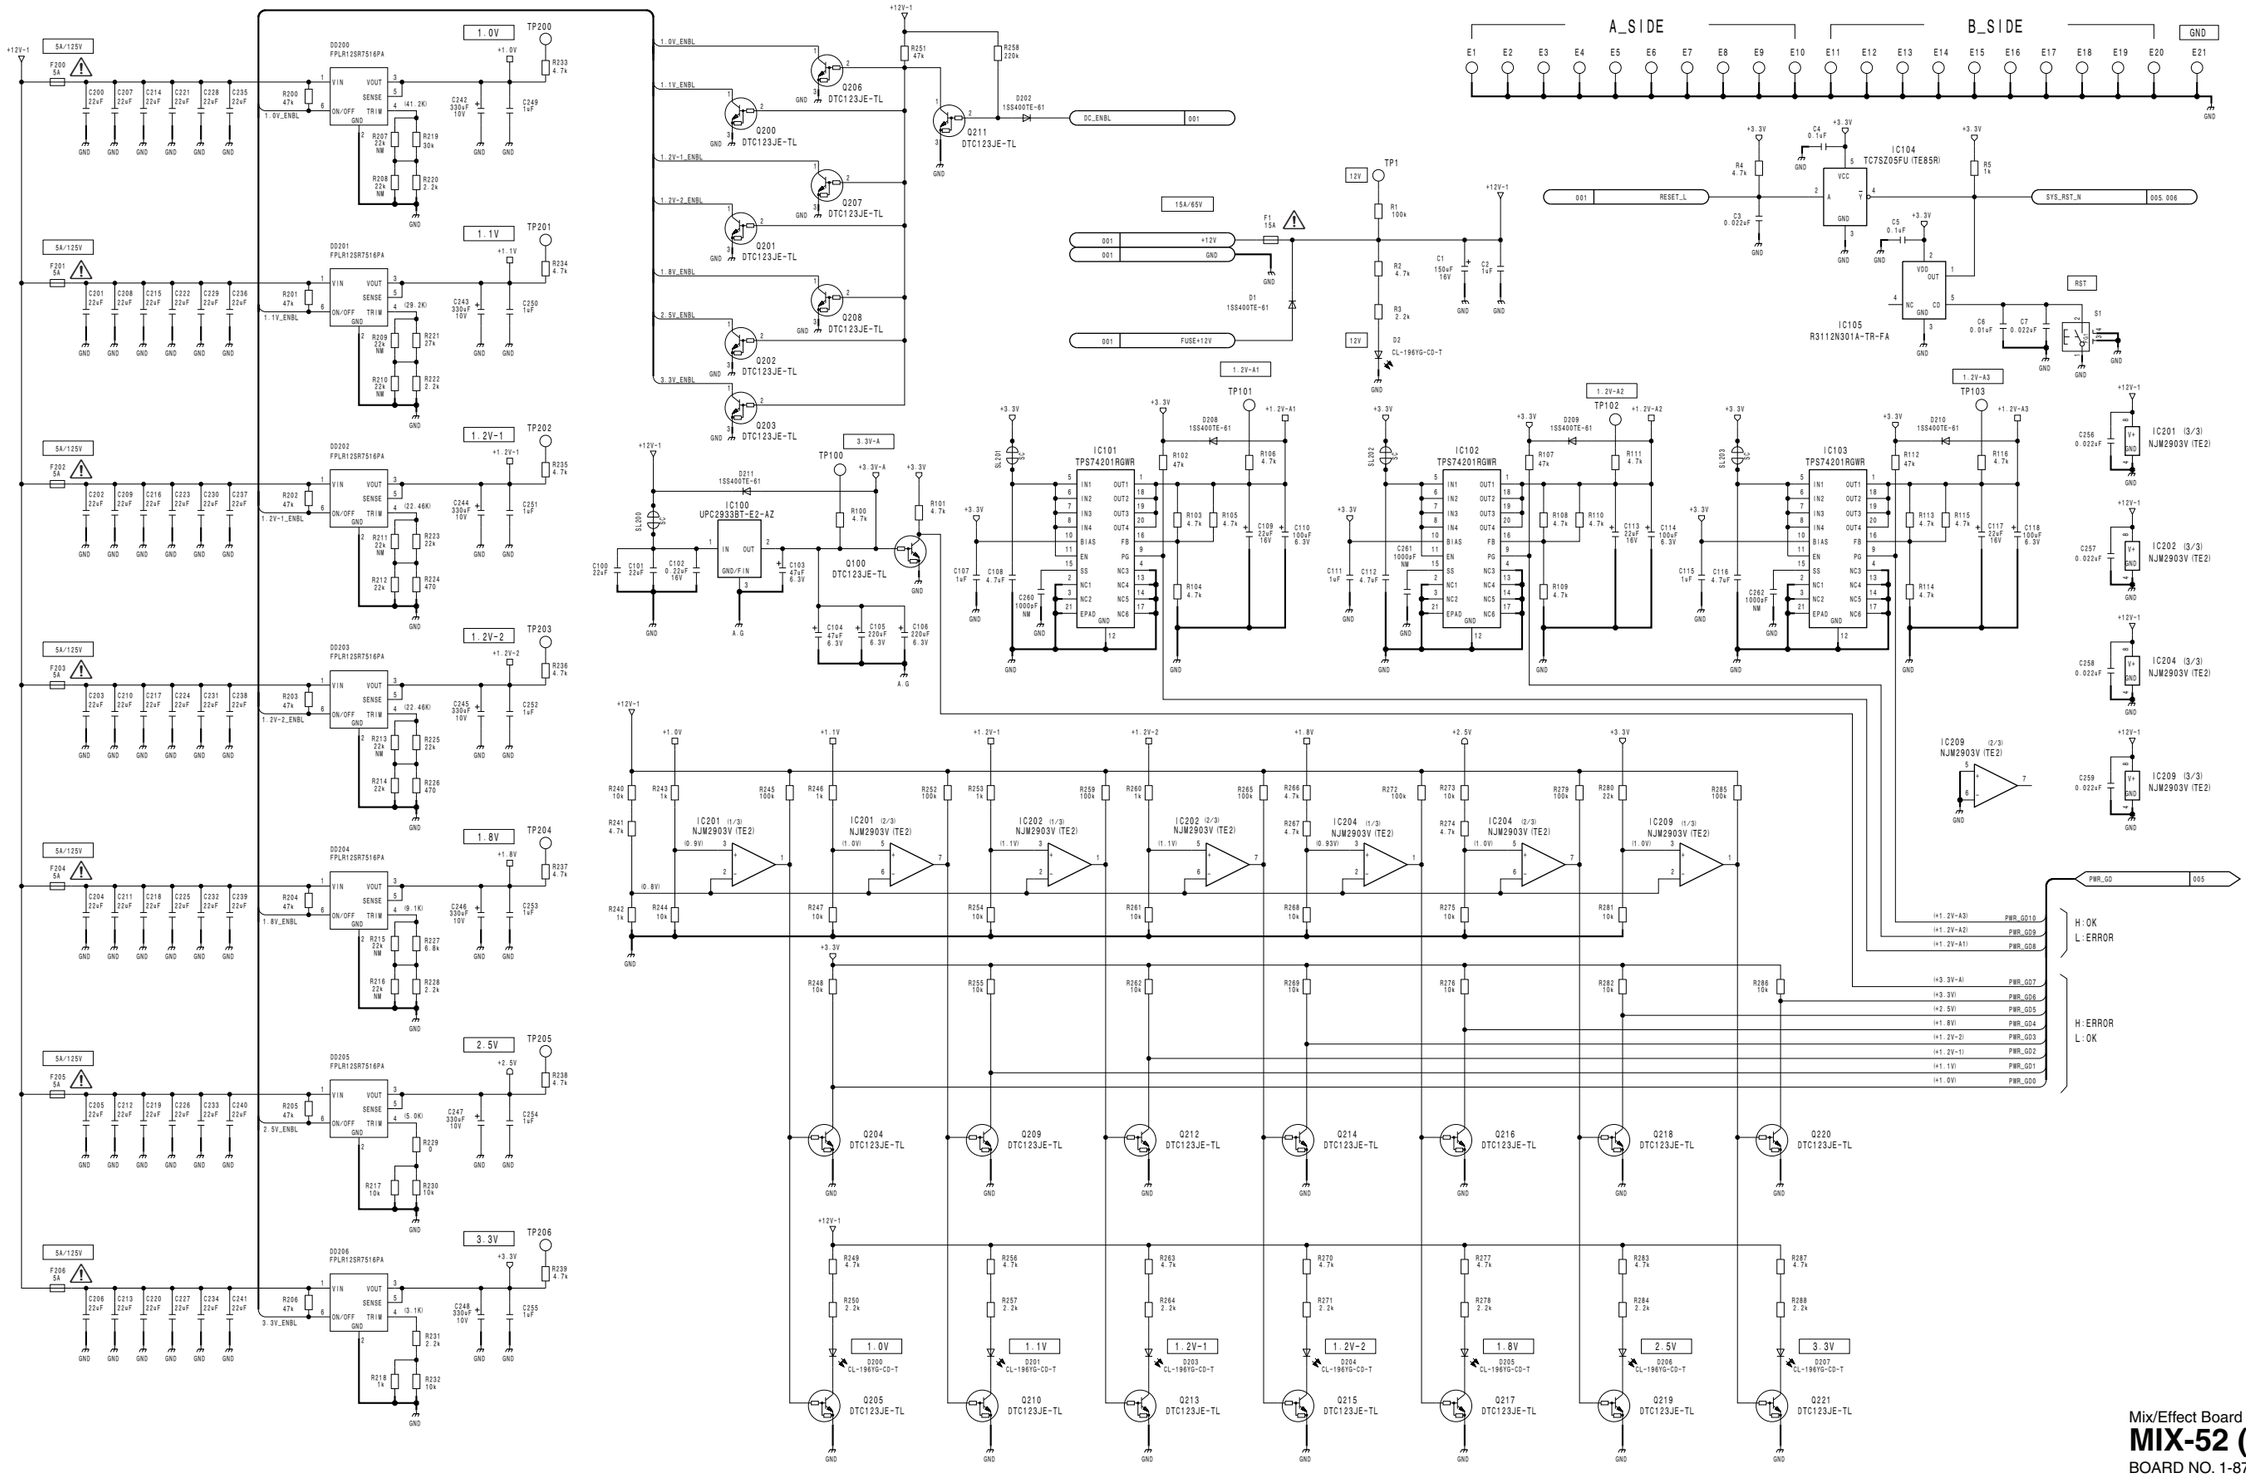


4-154

Mix/Effect Board
MIX-52 (2/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_2

MIX-52 (3/40)
SUFFIX: -12


MIX-52 (3/40)
SUFFIX: -12

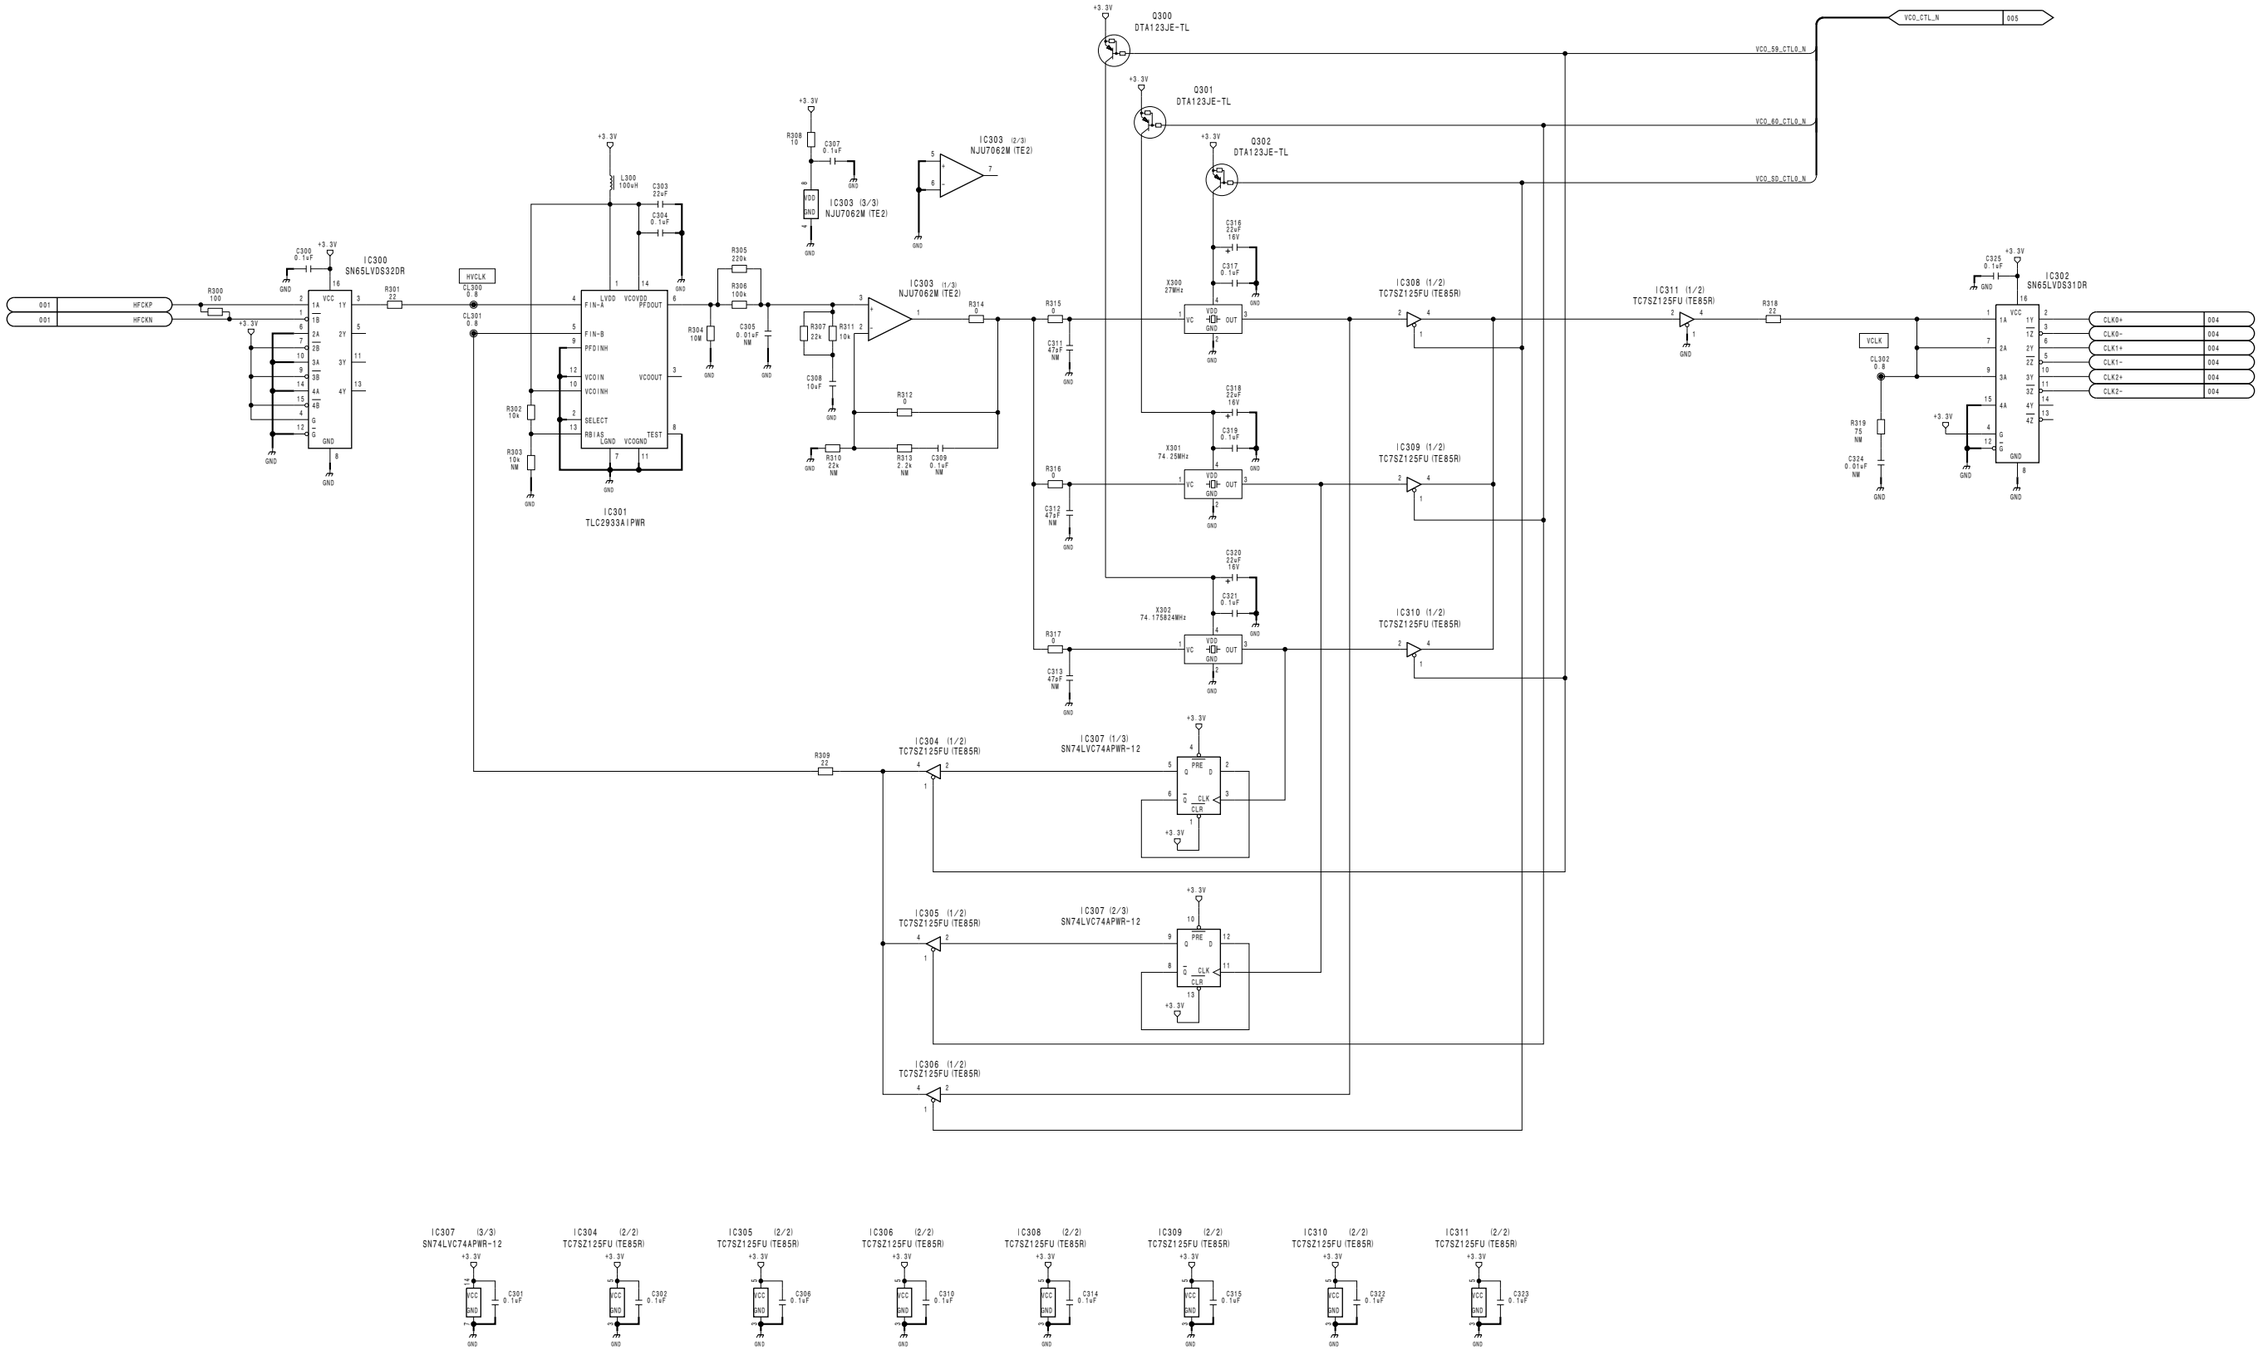

Mix/Effect Board
MIX-52 (3/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_3

4-155


MIX-52 (4/40)
SUFFIX: -12

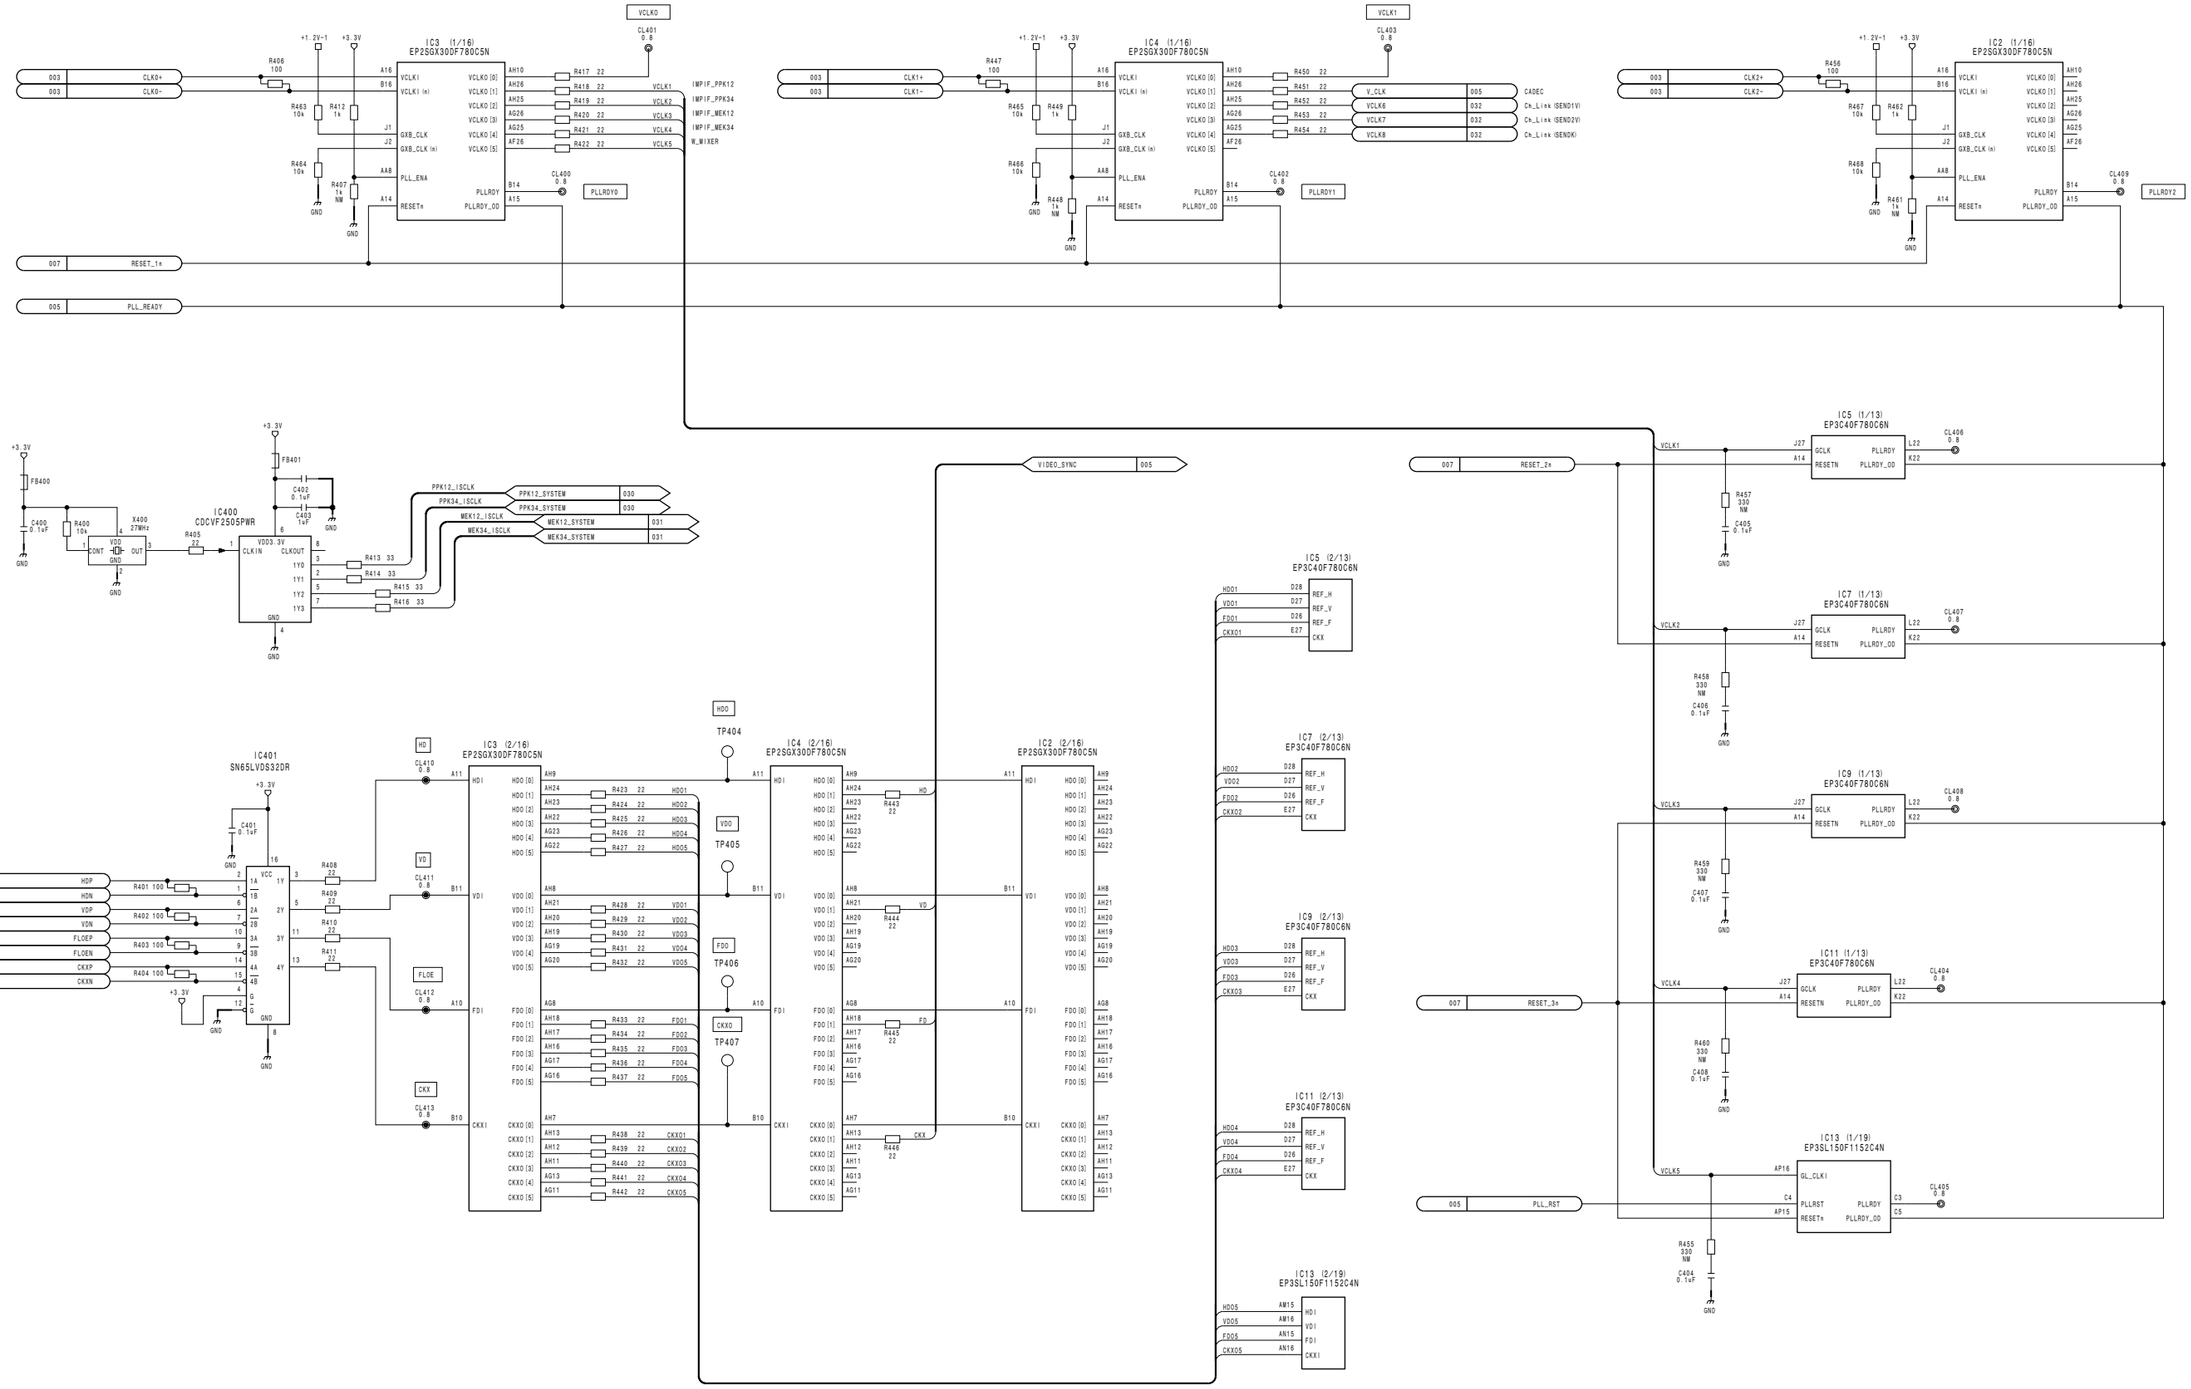


Mix/Effect Board
MIX-52 (4/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_4

MIX-52 (5/40) **SUFFIX: -12**


CPU I/F

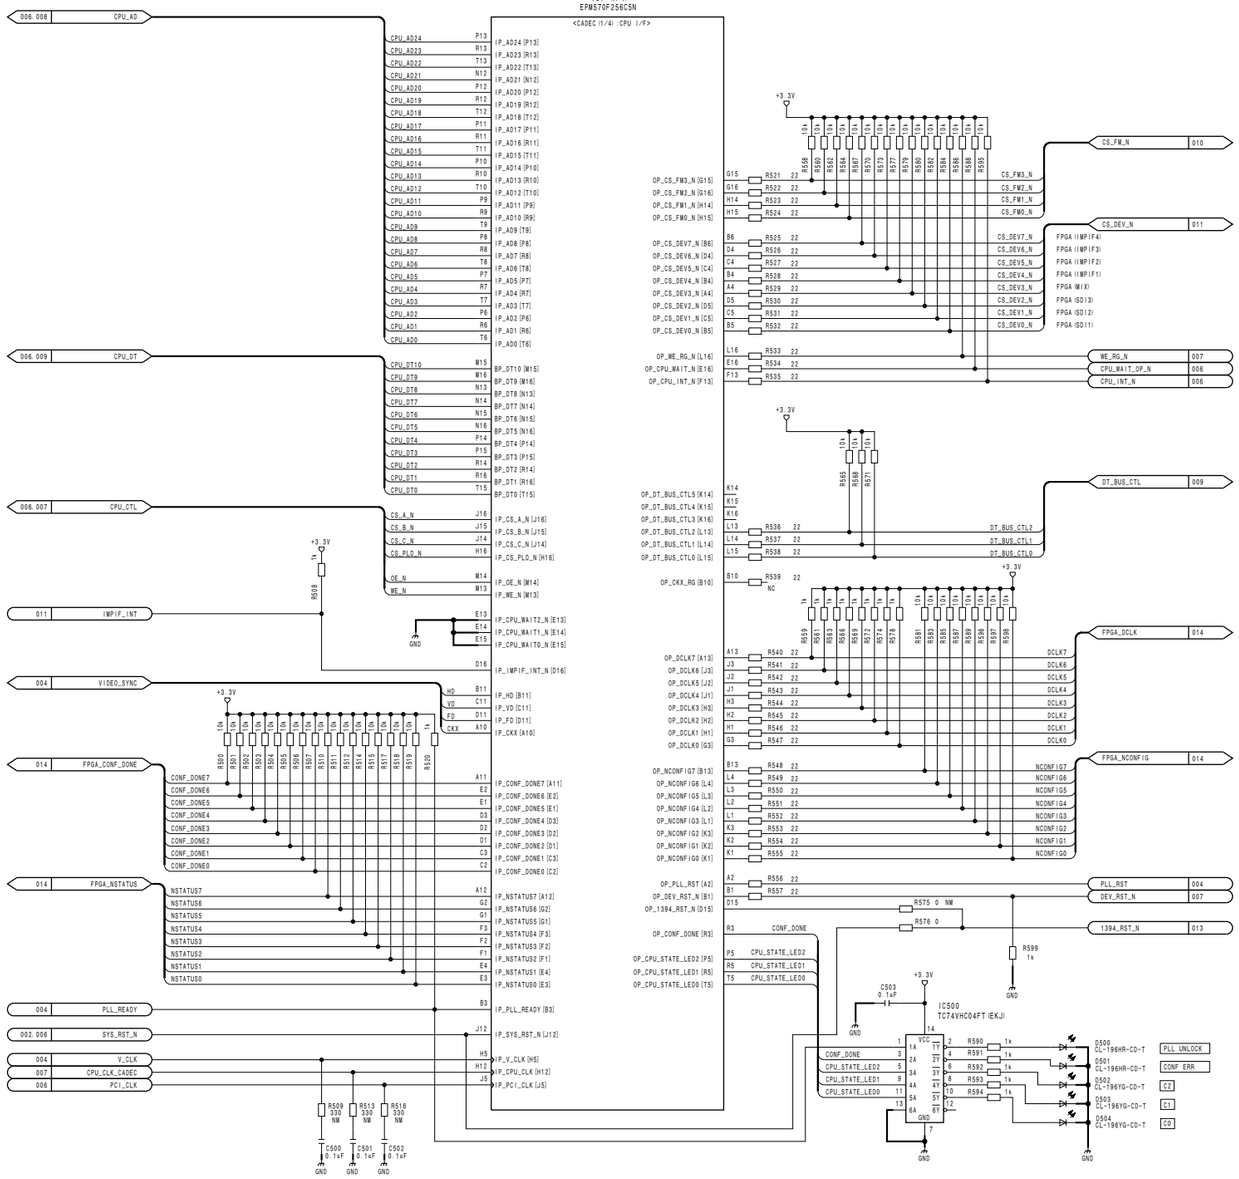

DEV CTL

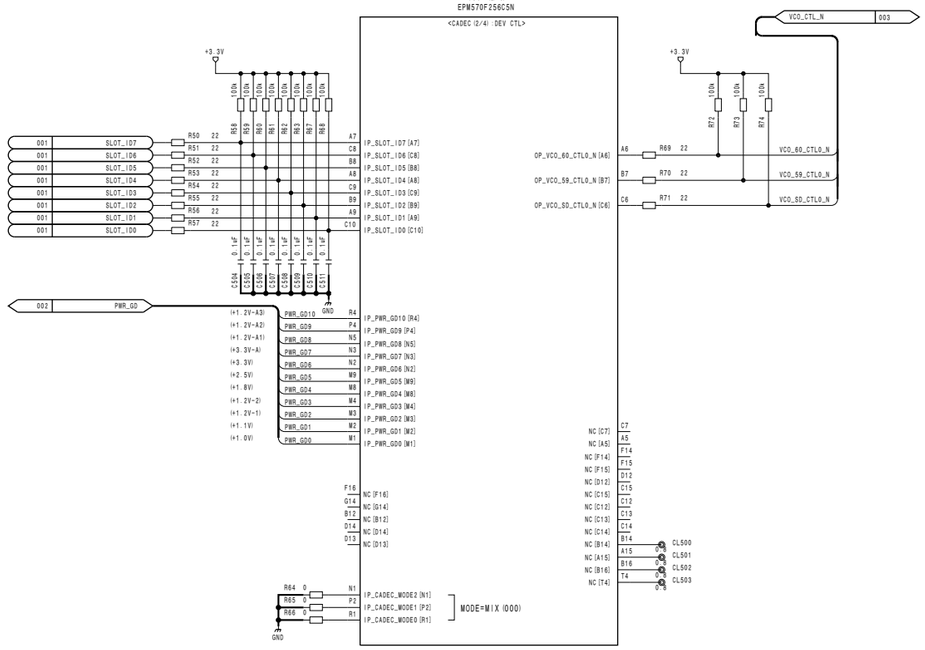


CADEC (VCC&GND)

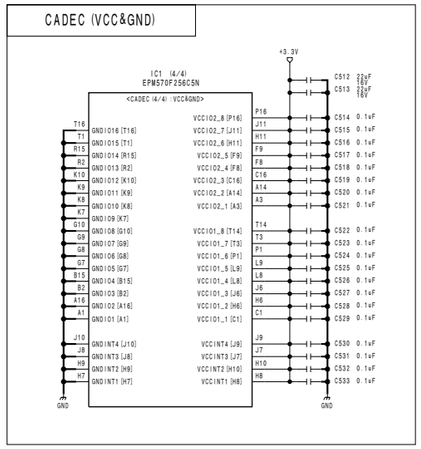

Mix/Effect Board
MIX-52 (5/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_5


MIX-52 (6/40) **SUFFIX: -12**


CPU

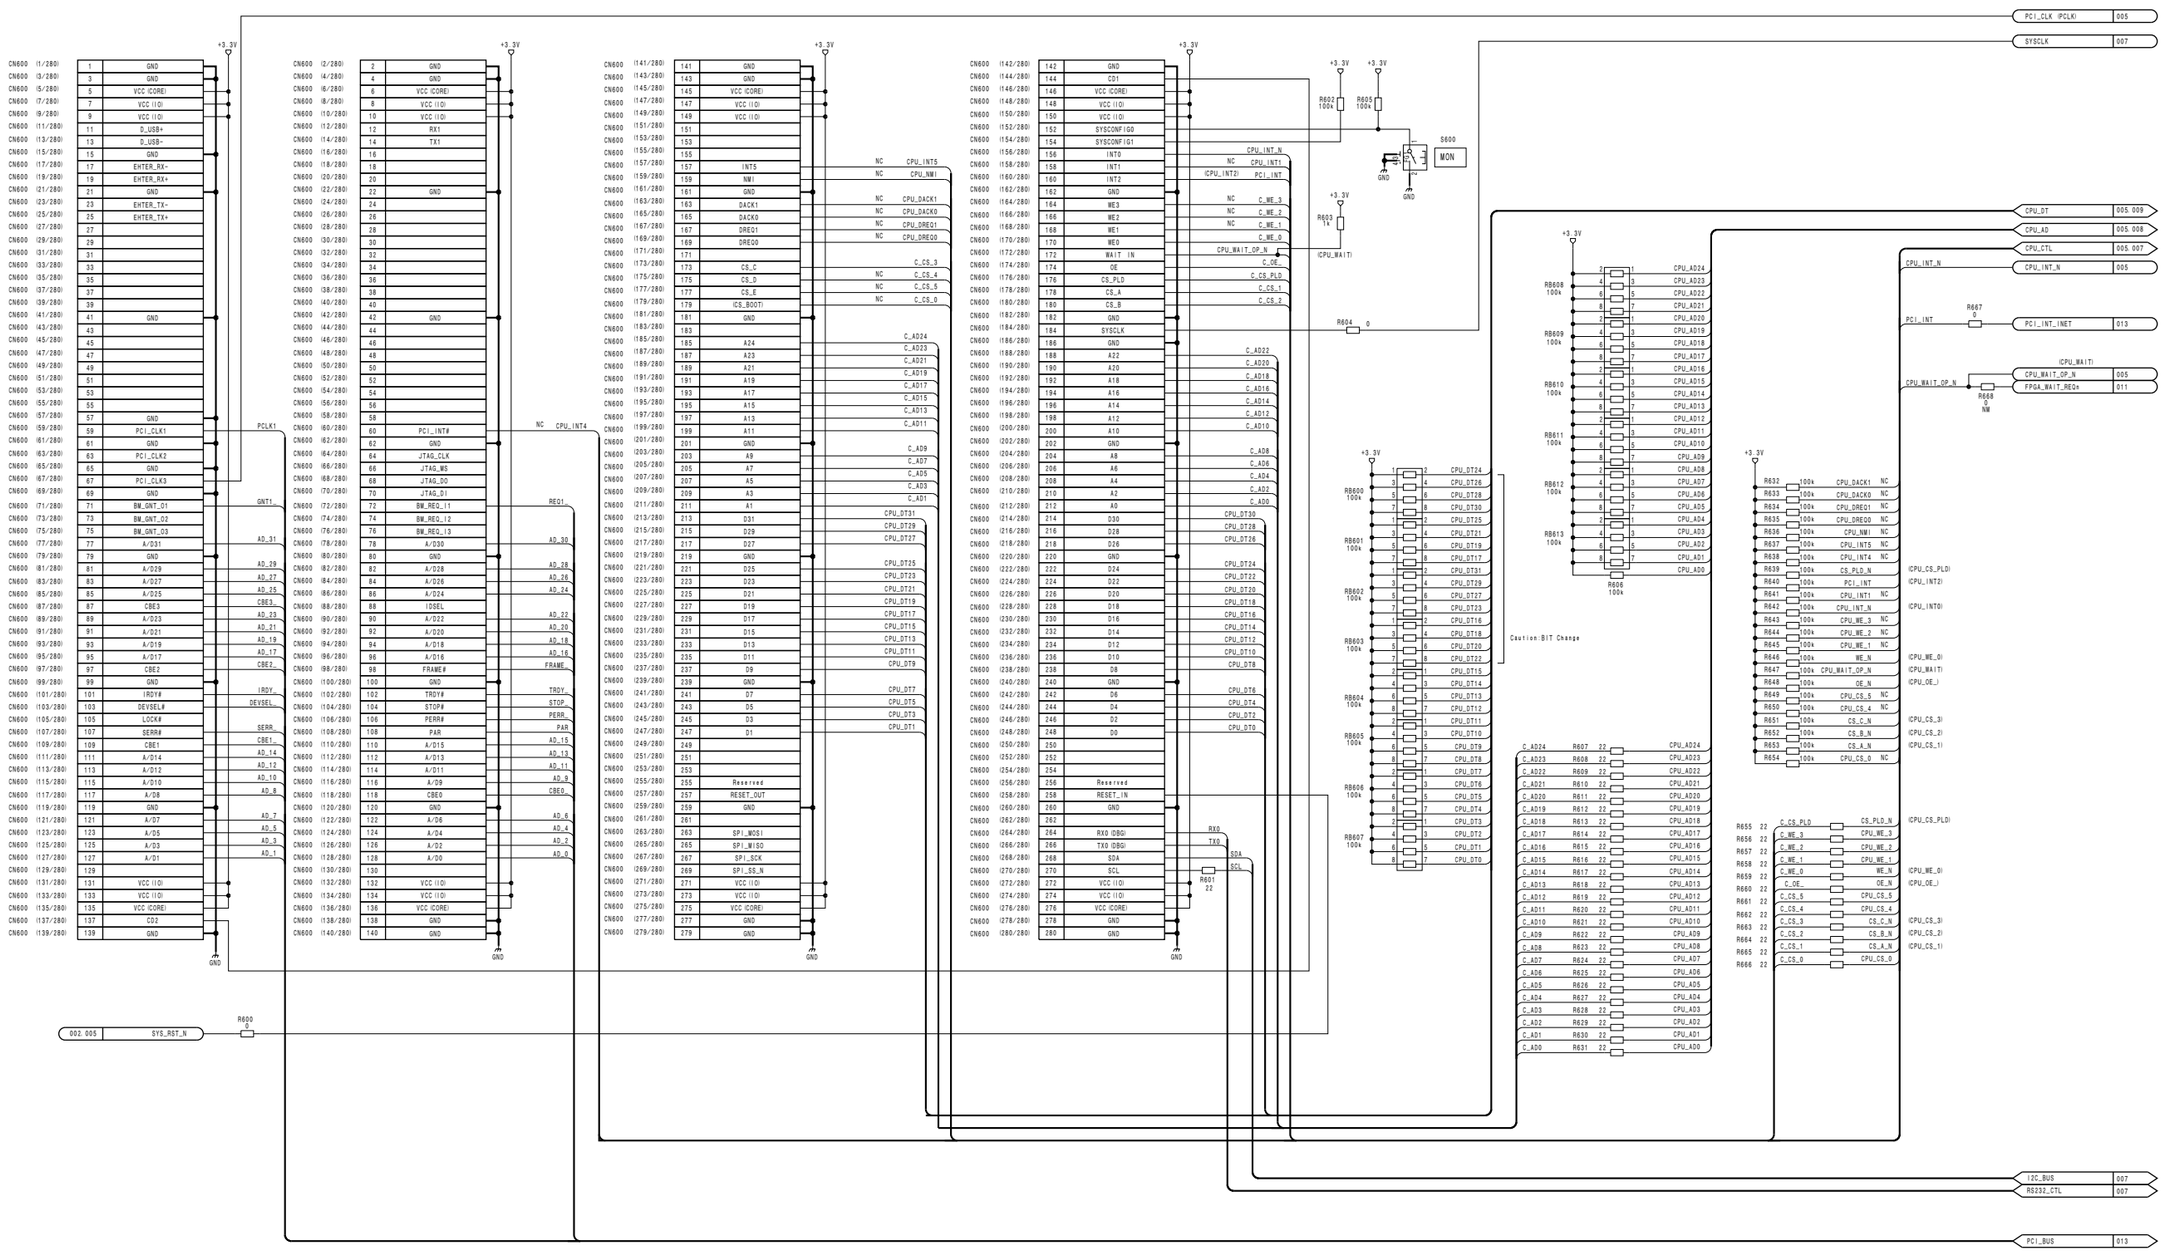

Mix/Effect Board
MIX-52 (6/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_6


MIX-52 (7/40)
SUFFIX: -12

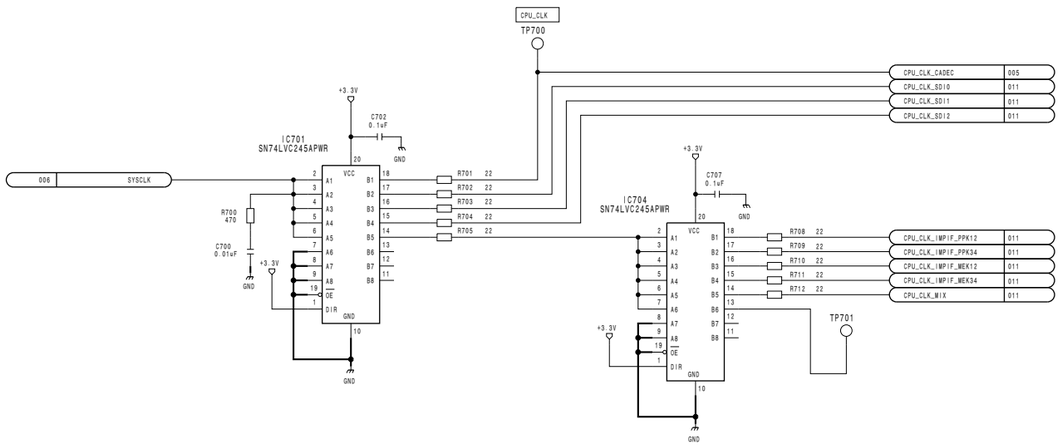

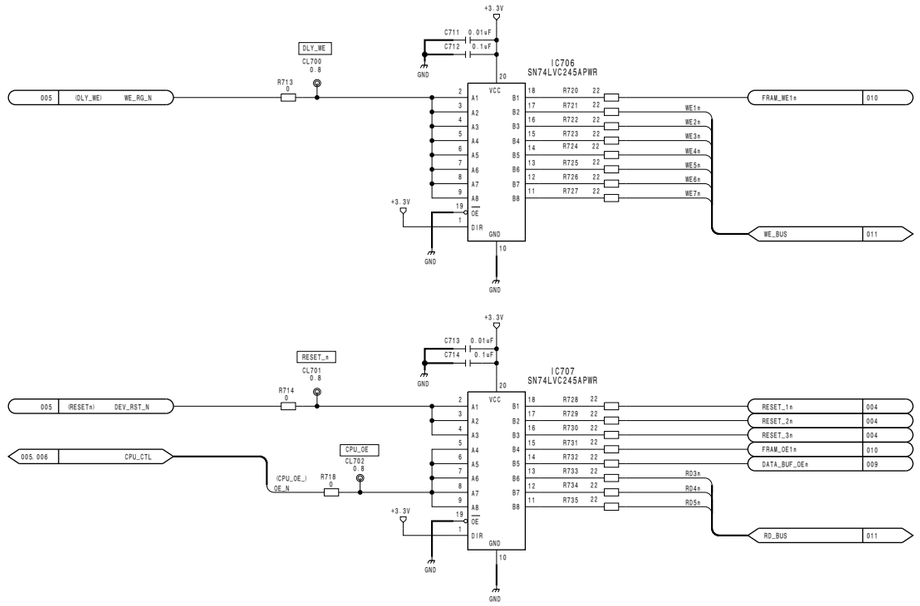


Mix/Effect Board
MIX-52 (7/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_7

MIX-52 (8/40)
SUFFIX: -12

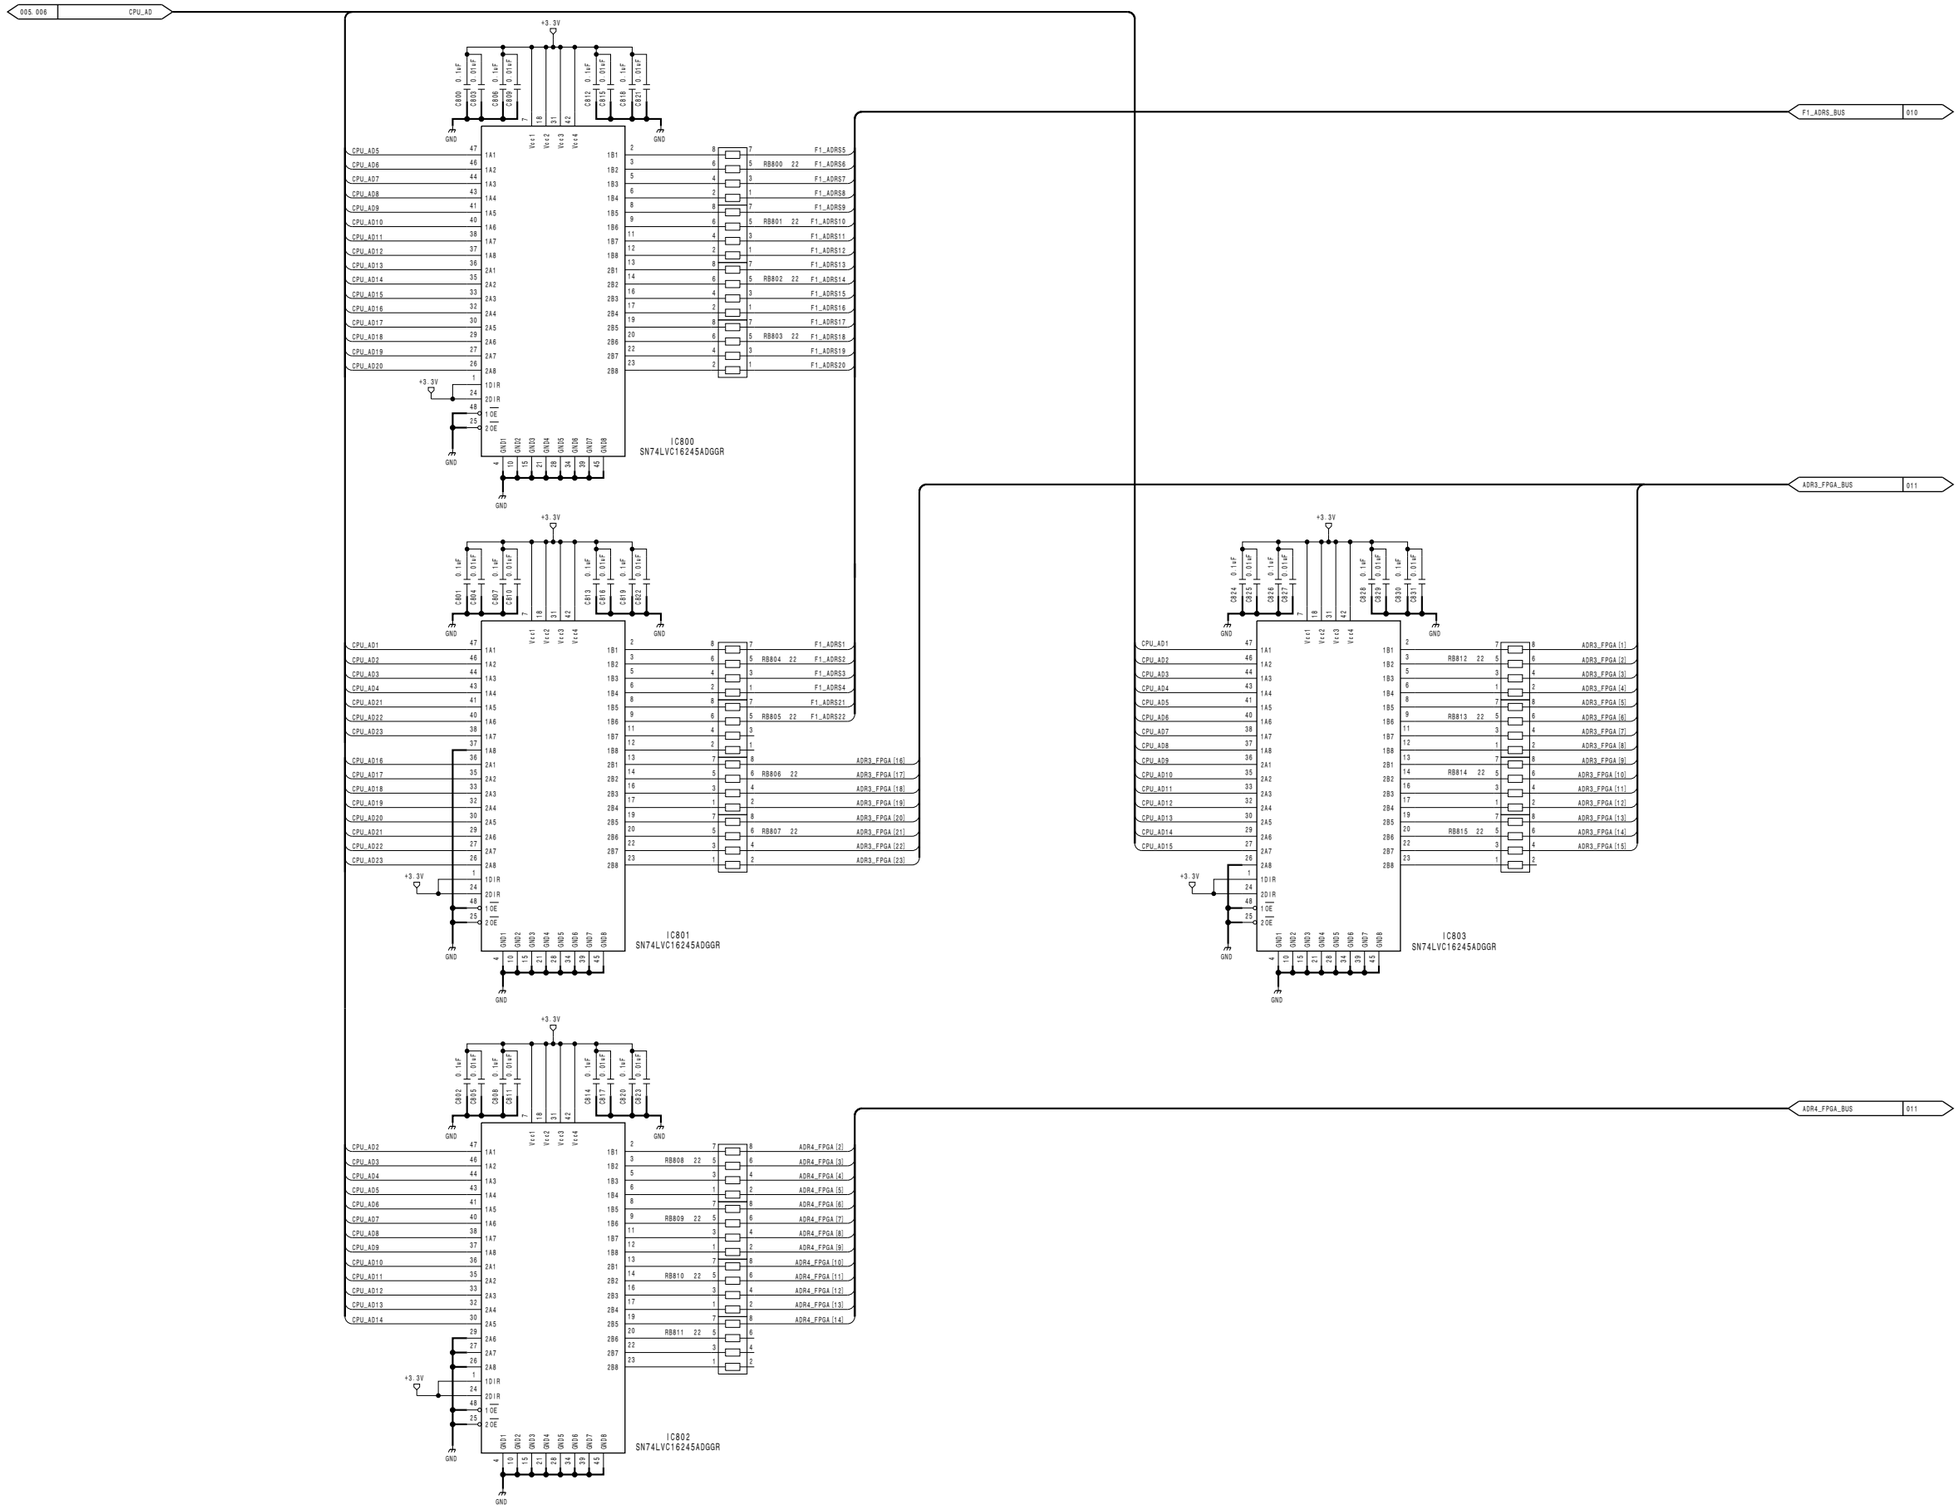


Mix/Effect Board
MIX-52 (8/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_8

MIX-52 (9/40)
SUFFIX: -12

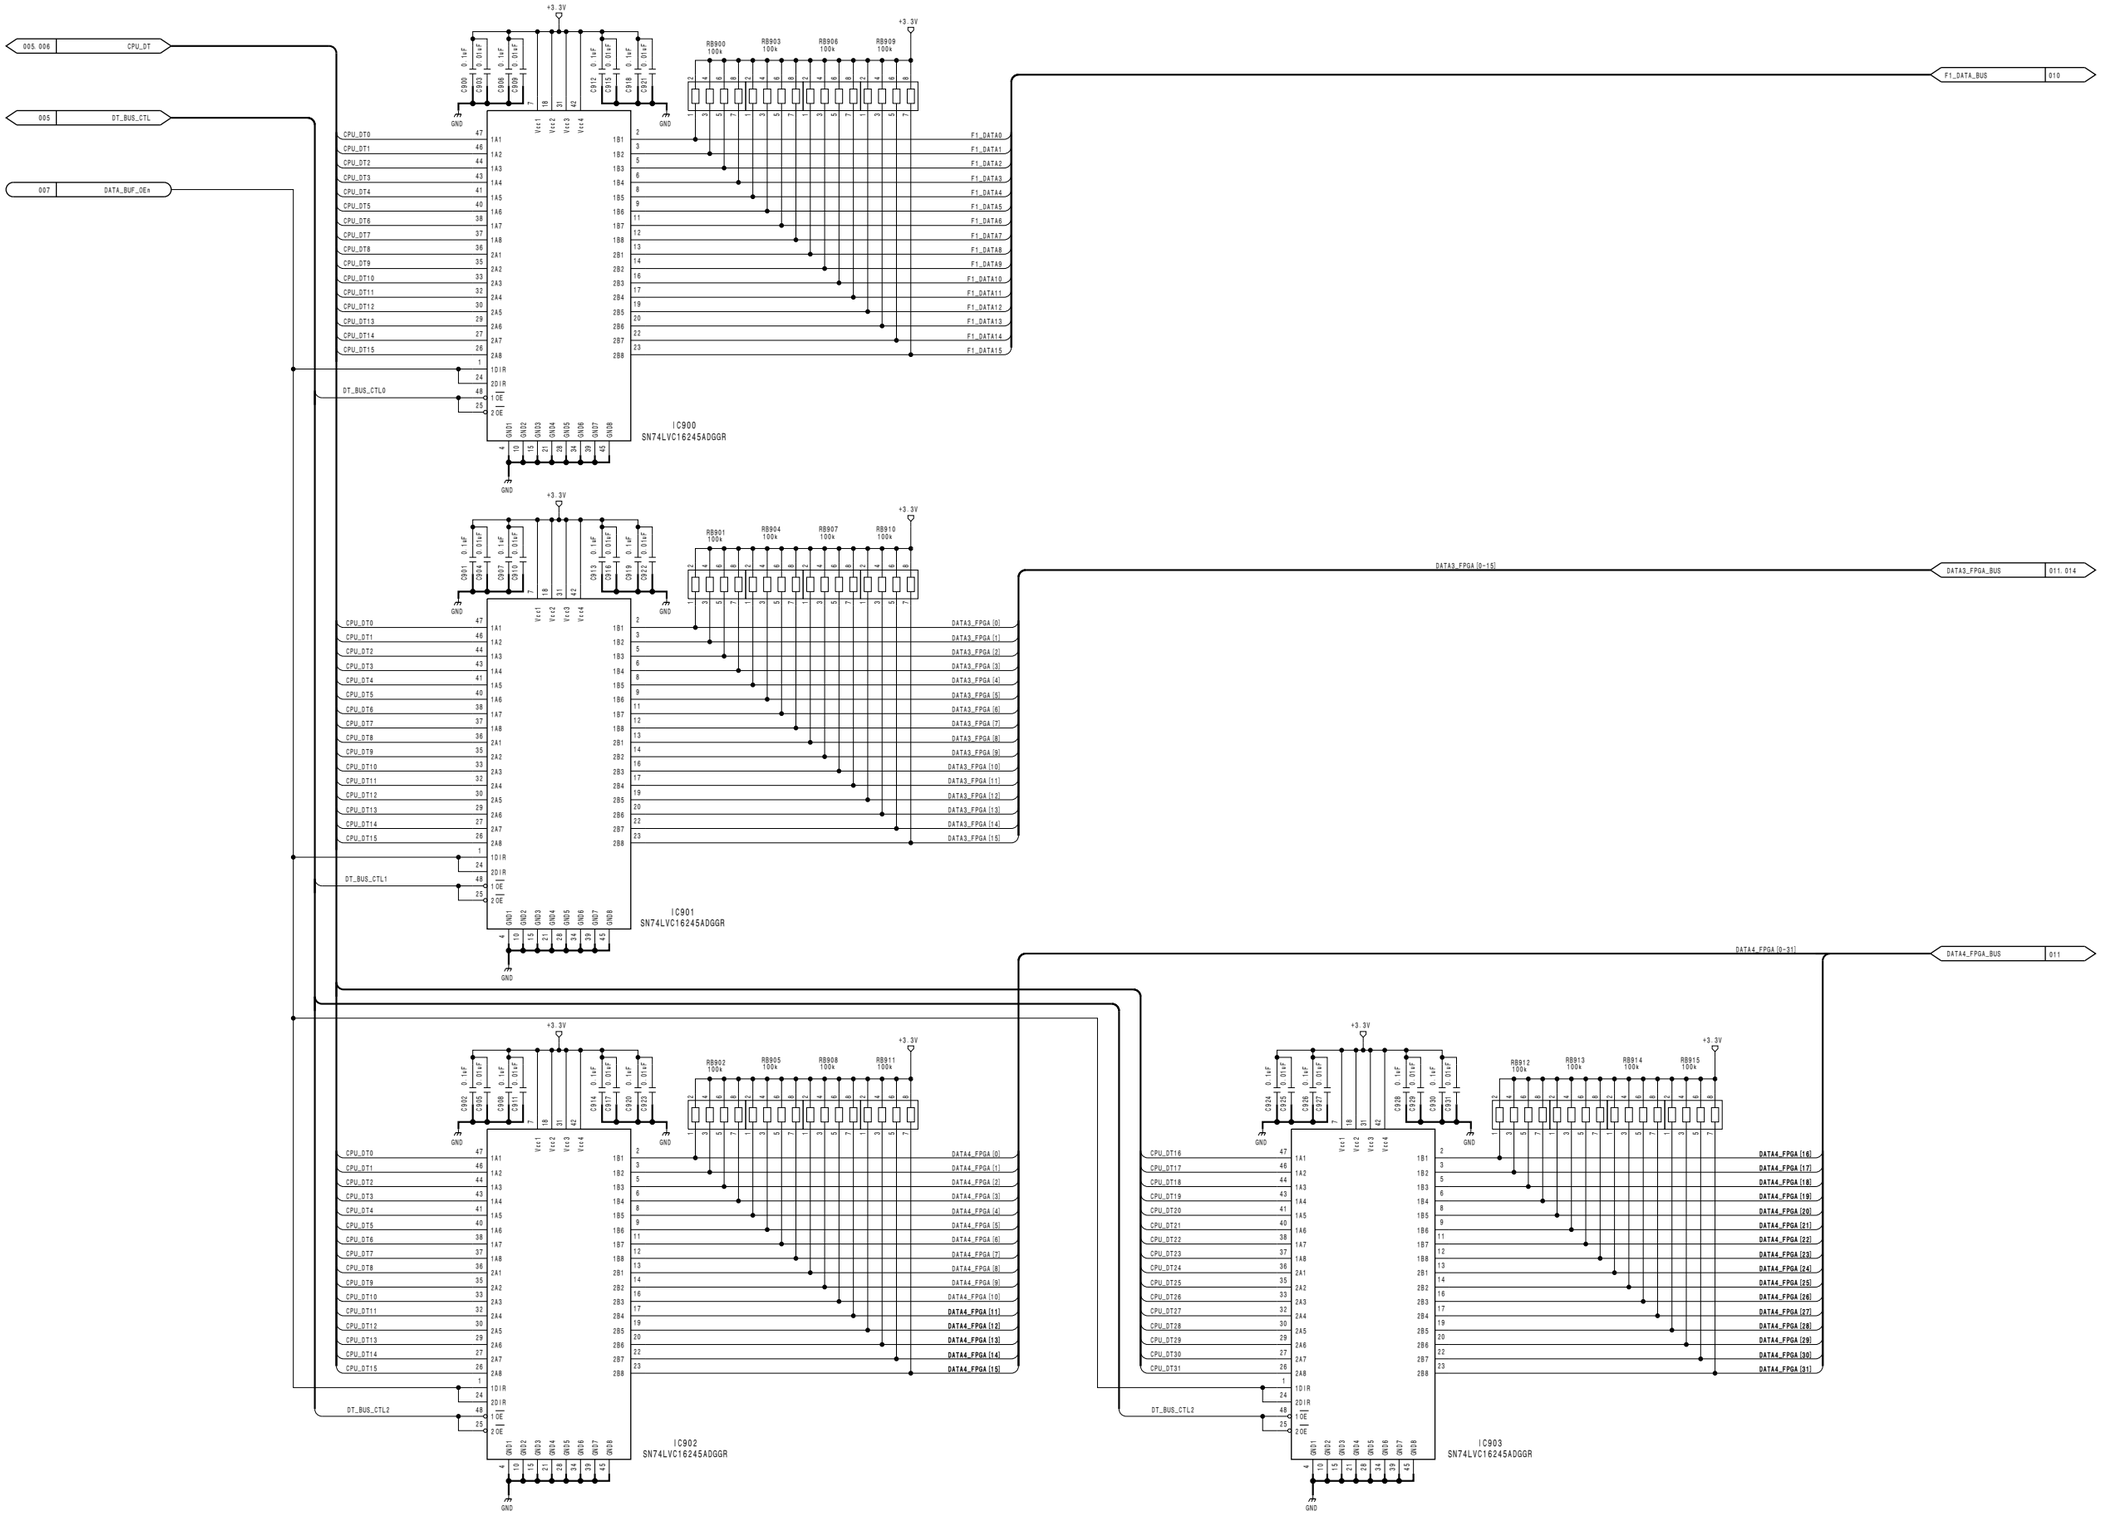


Mix/Effect Board
MIX-52 (9/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_9

MIX-52 (10/40)
SUFFIX: -12

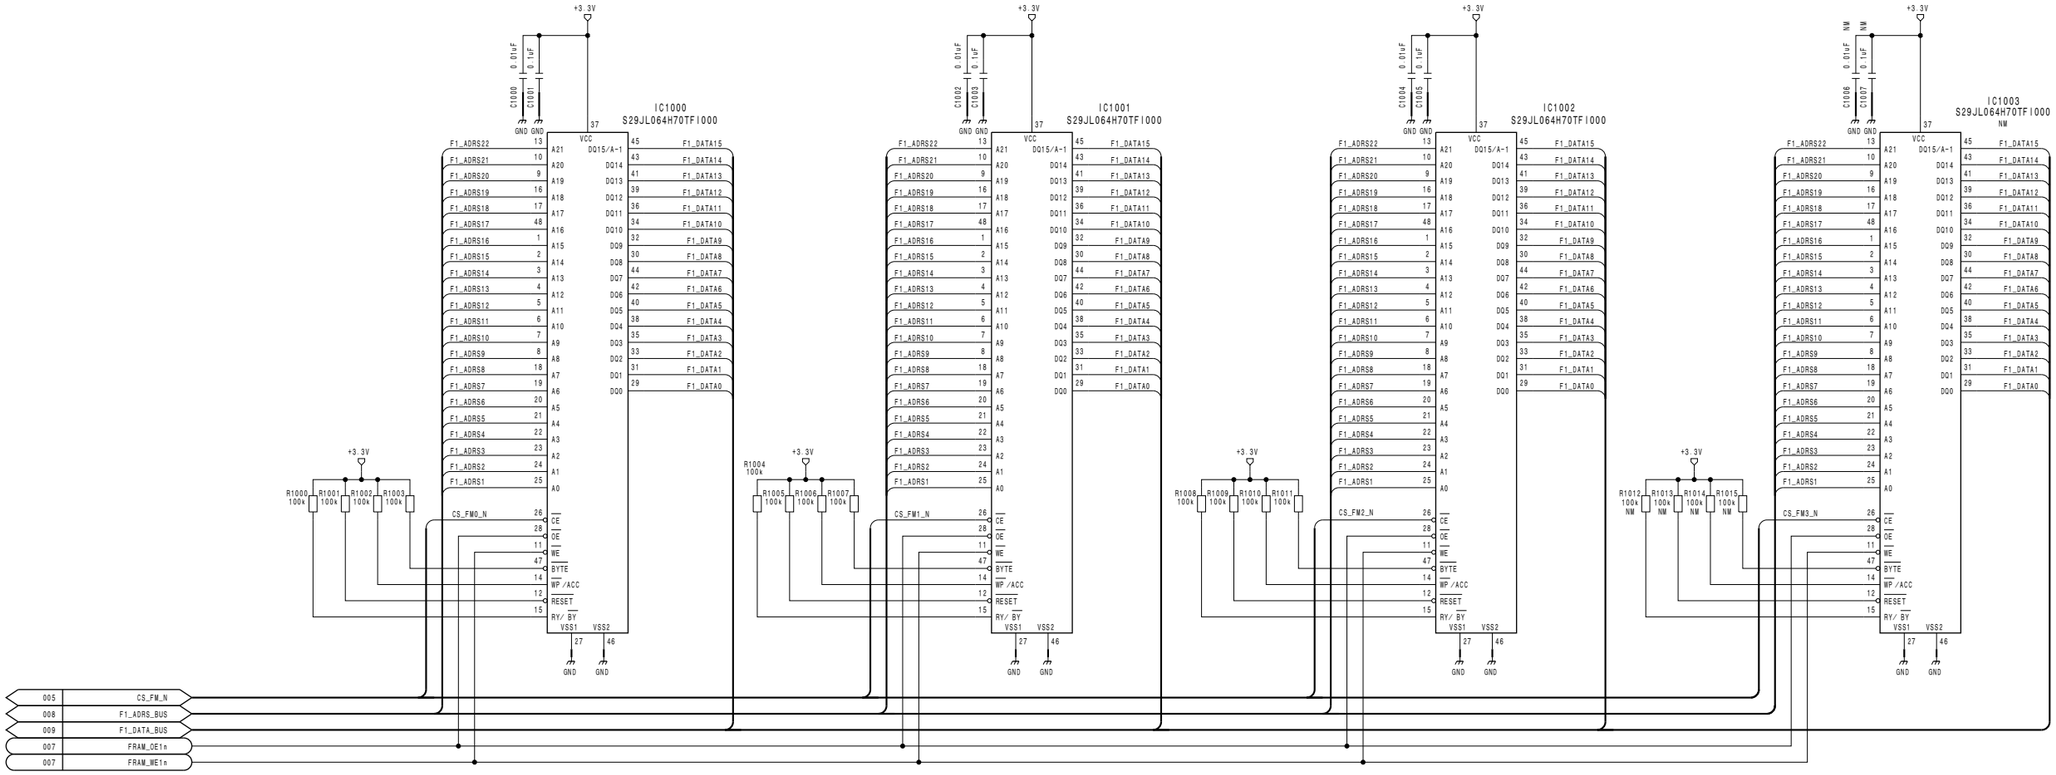


Mix/Effect Board
MIX-52 (10/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_10

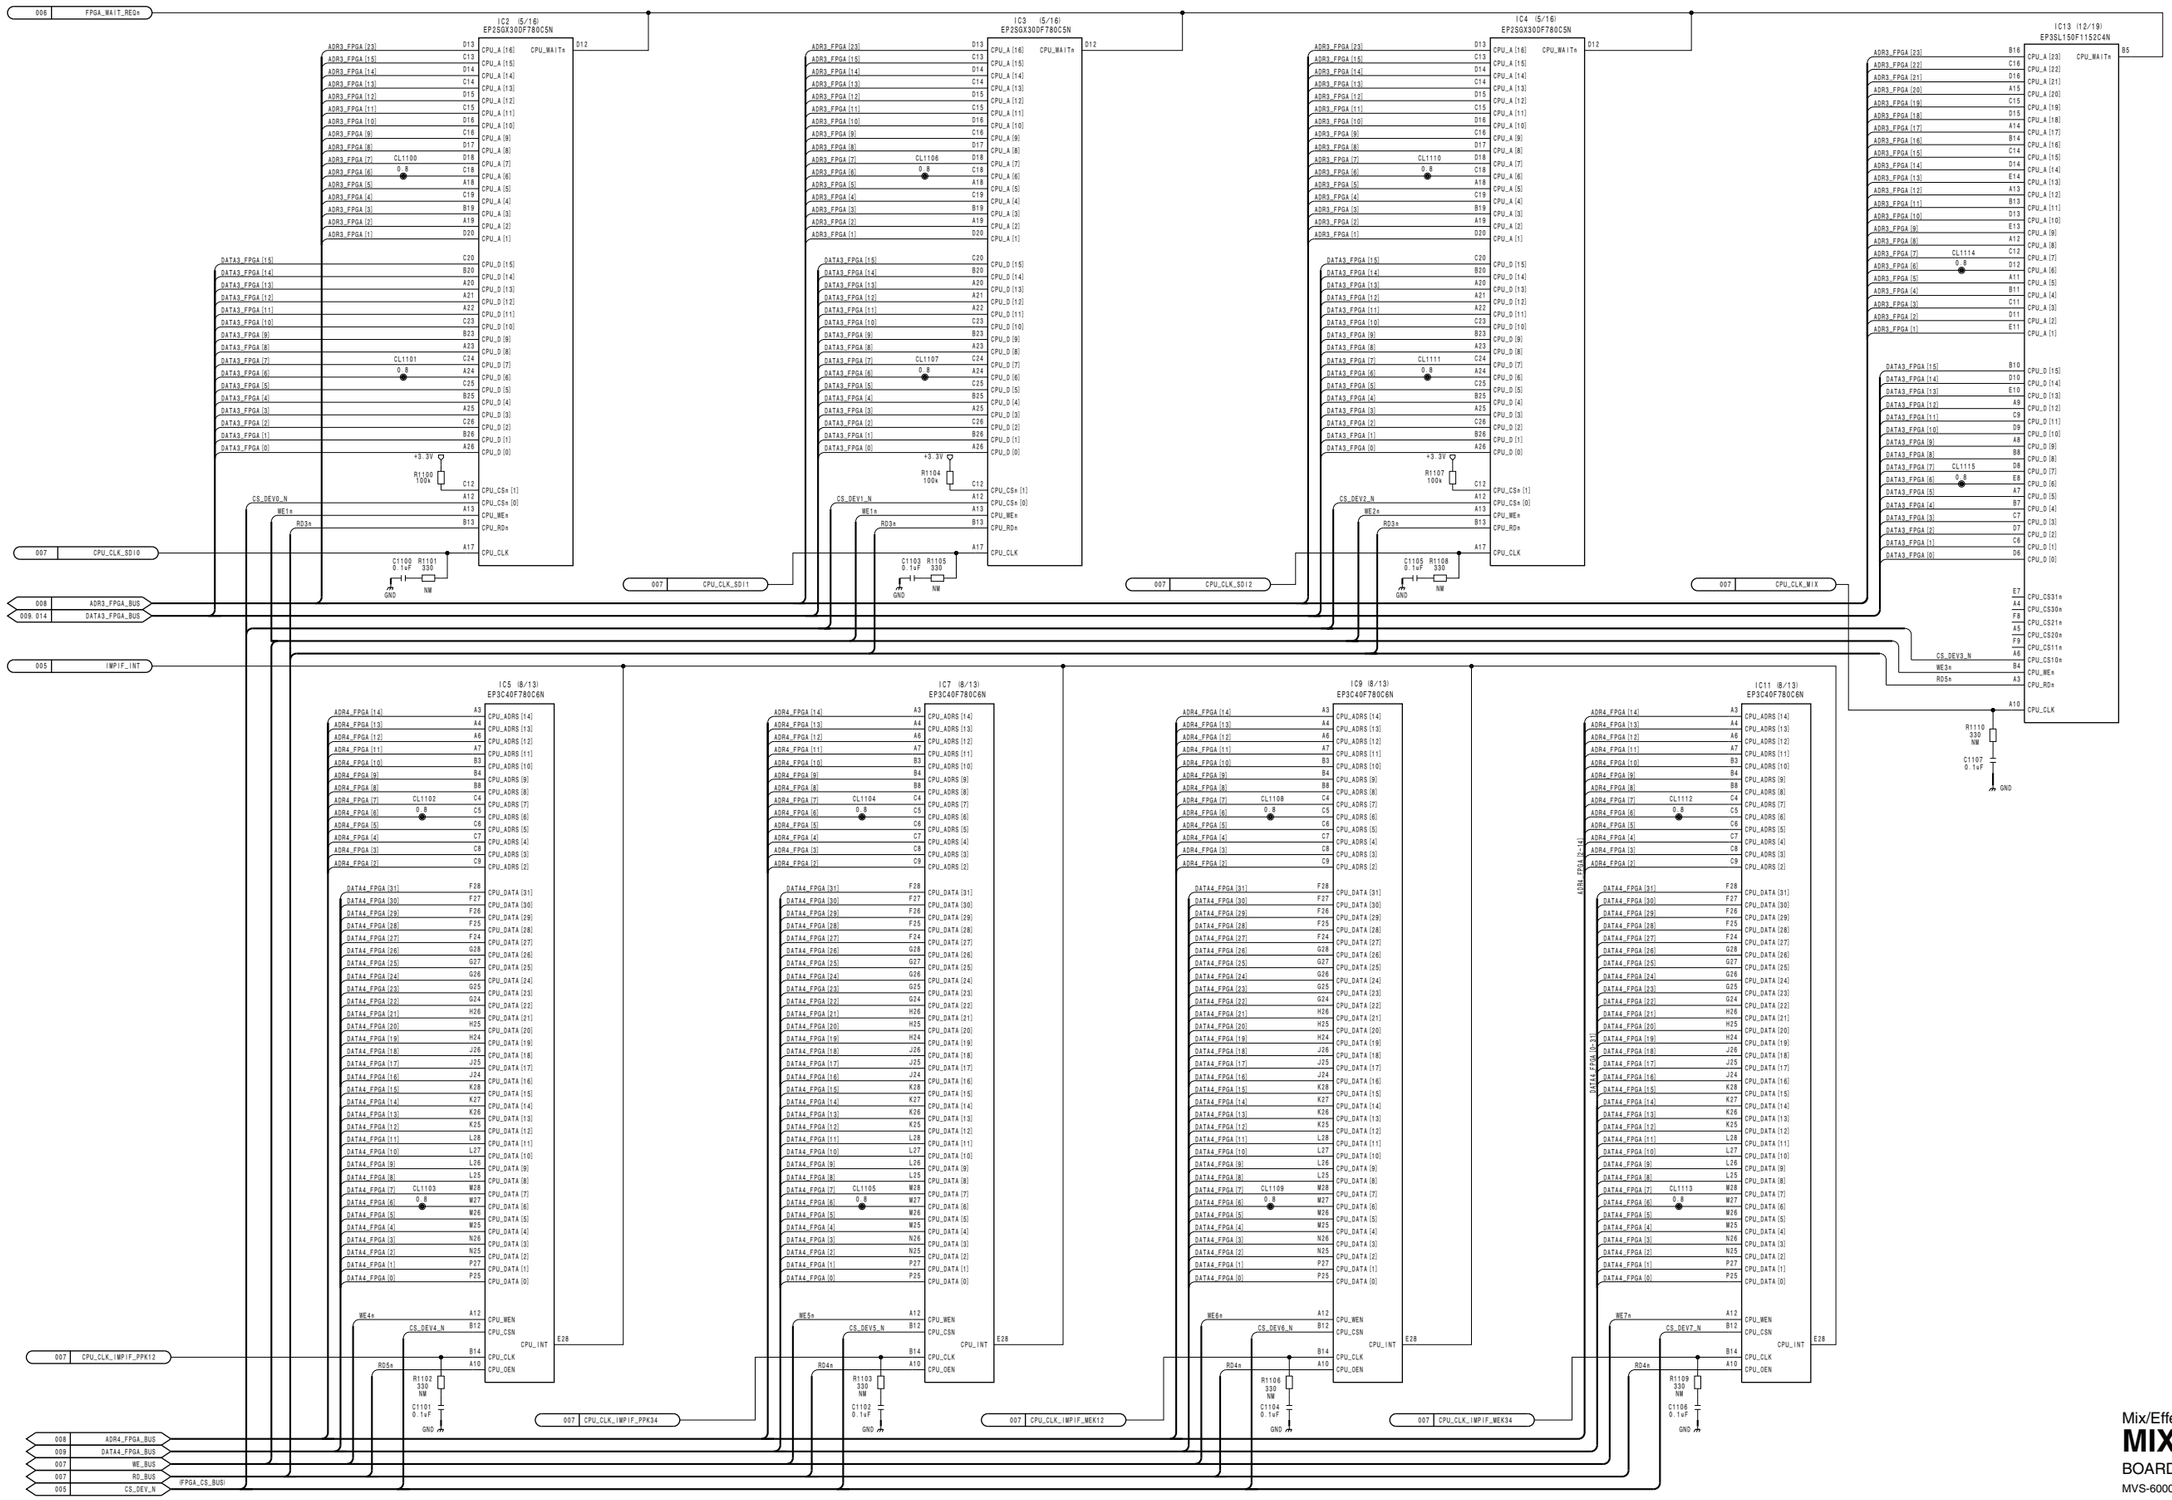



Mix/Effect Board
MIX-52 (11/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_11


MIX-52 (12/40)
SUFFIX: -12




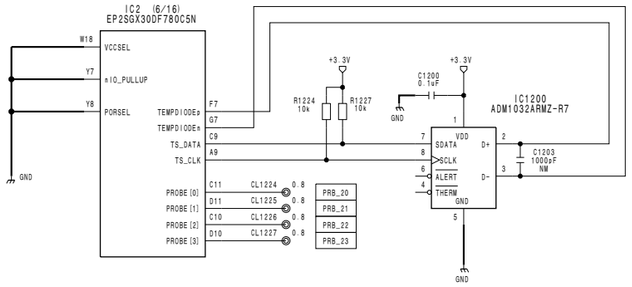


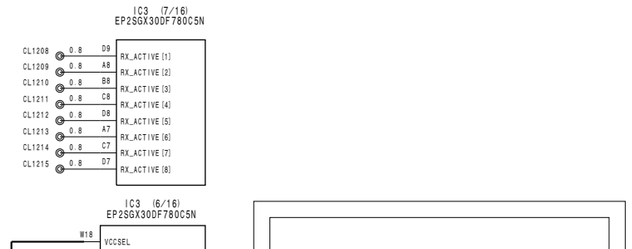


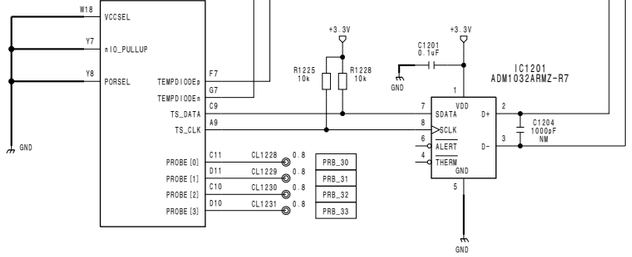


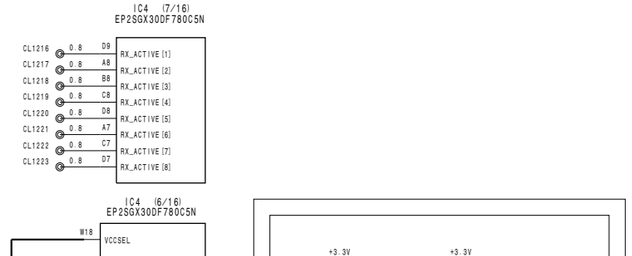


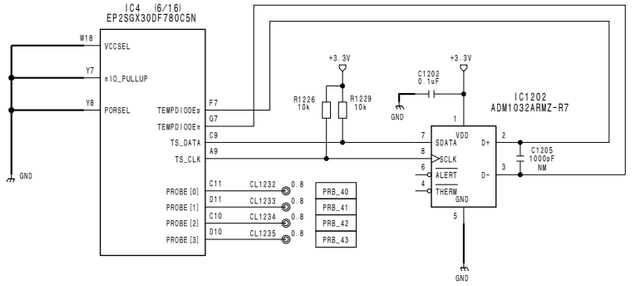








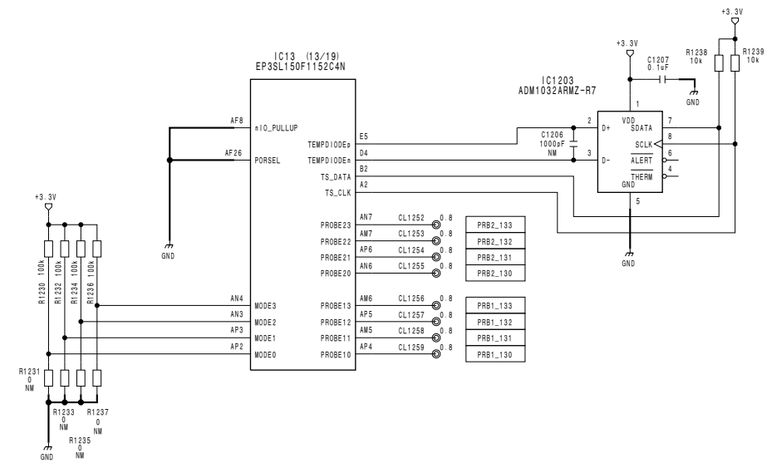


Mix/Effect Board
MIX-52 (12/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_12

MIX-52 (13/40) **SUFFIX: -12**

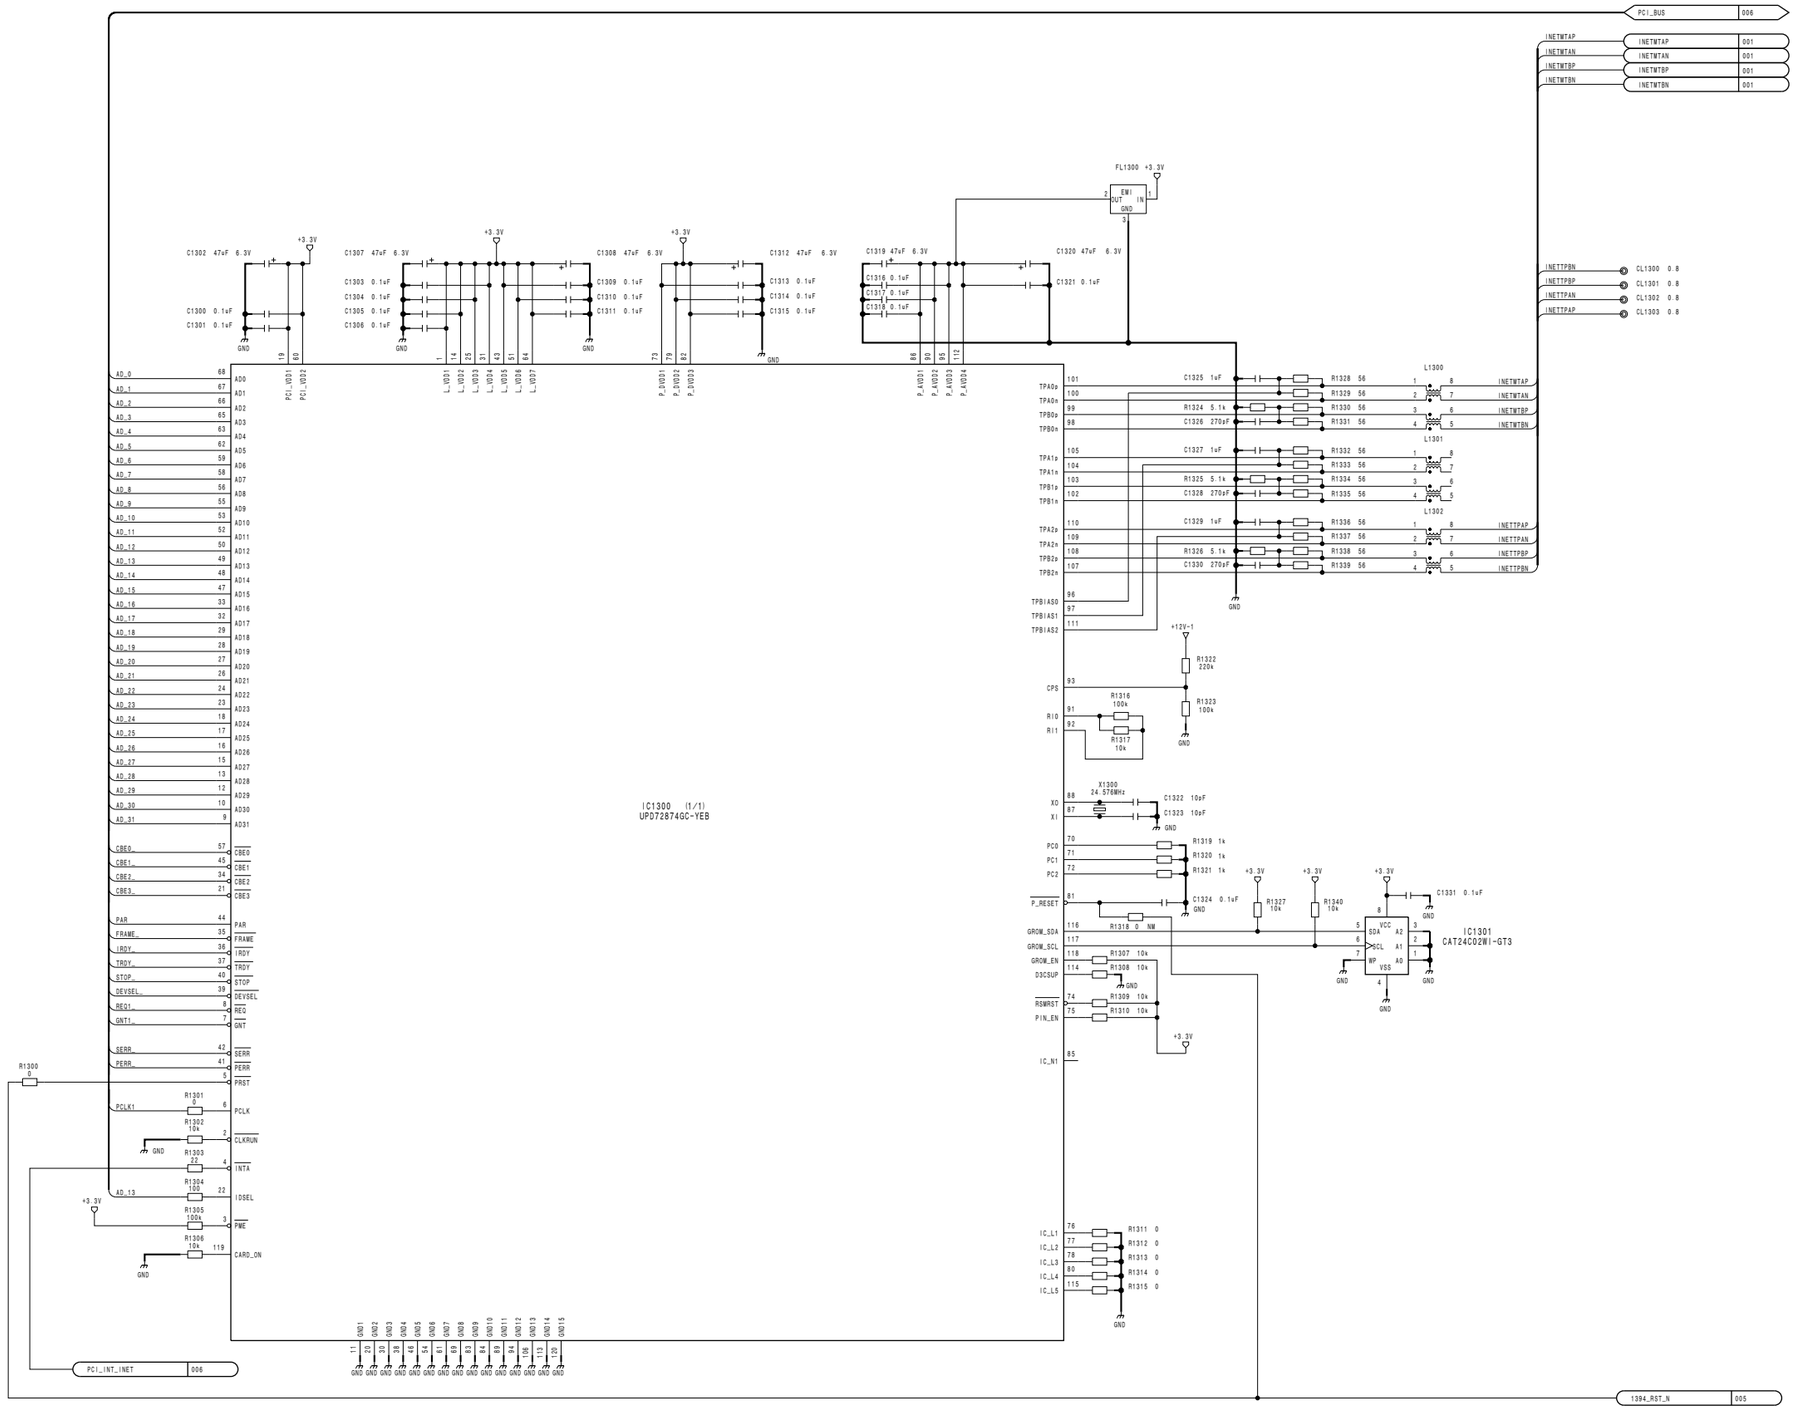

Mix/Effect Board
MIX-52 (13/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_13

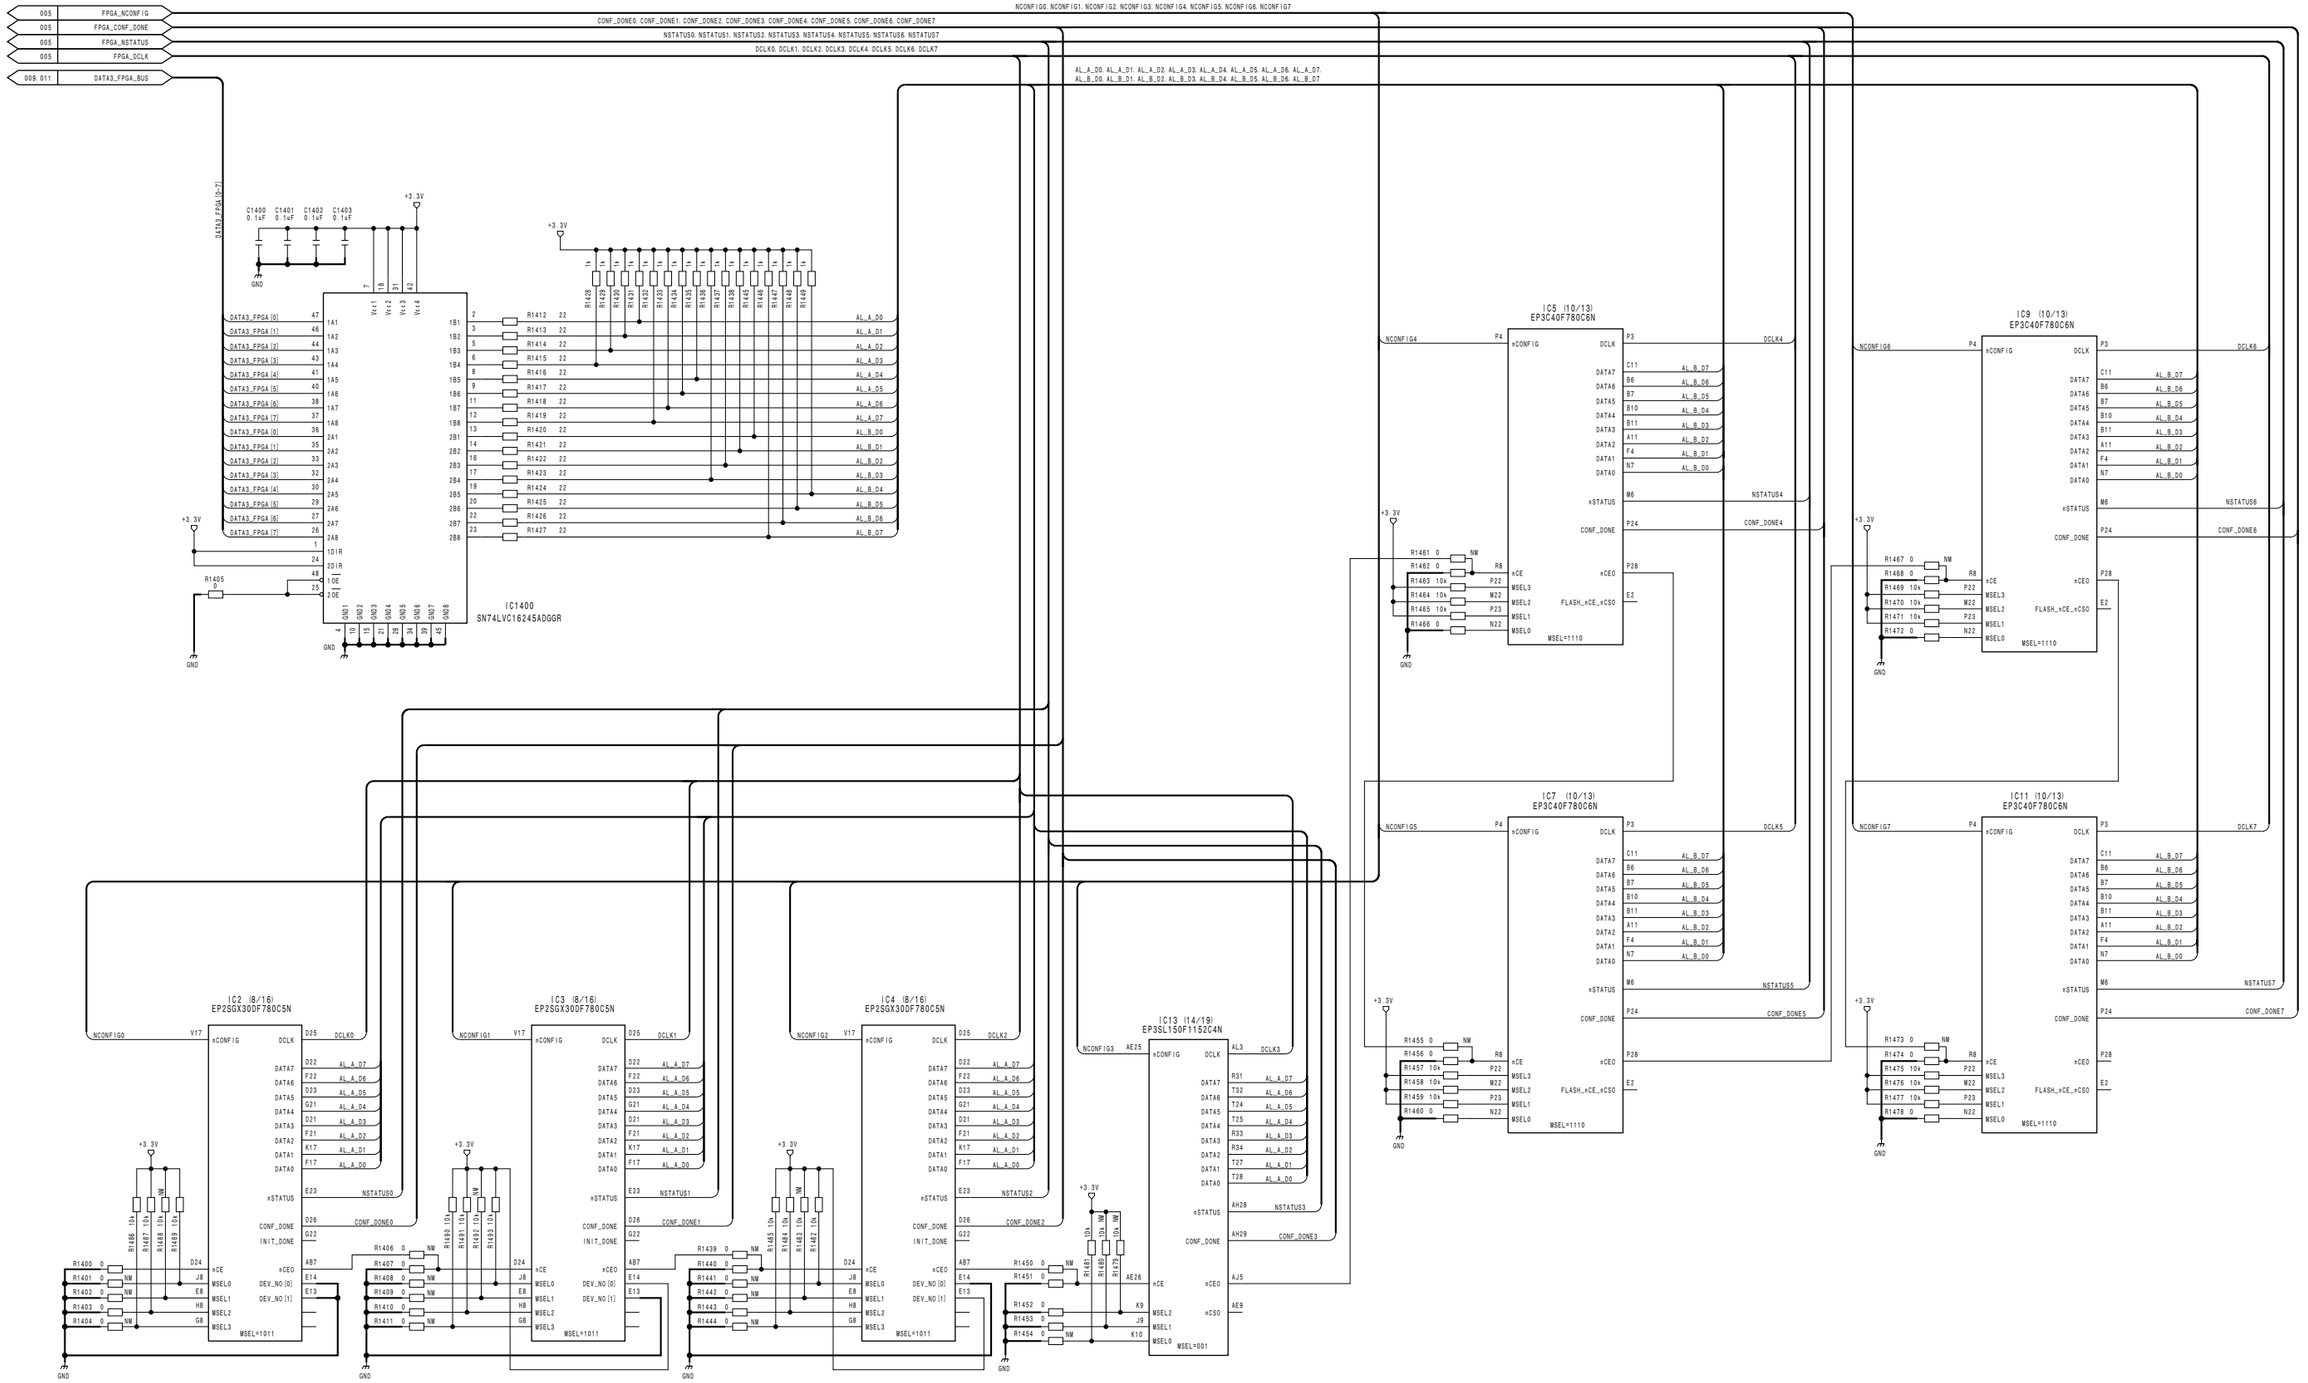



Mix/Effect Board
MIX-52 (14/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_14


MIX-52 (15/40) **SUFFIX: -12**


JTAG_CHAIN \ Ref	R1543	R1544	R1558	R1559	R1568	R1565	R1566
FULL (def)	0	X	X	0	0	X	0
CADEC (IC1)	0	X	0	X	X	X	0
IMP	X	0	X	0	0	0	X


(Note)
O:Mount
X:No mount

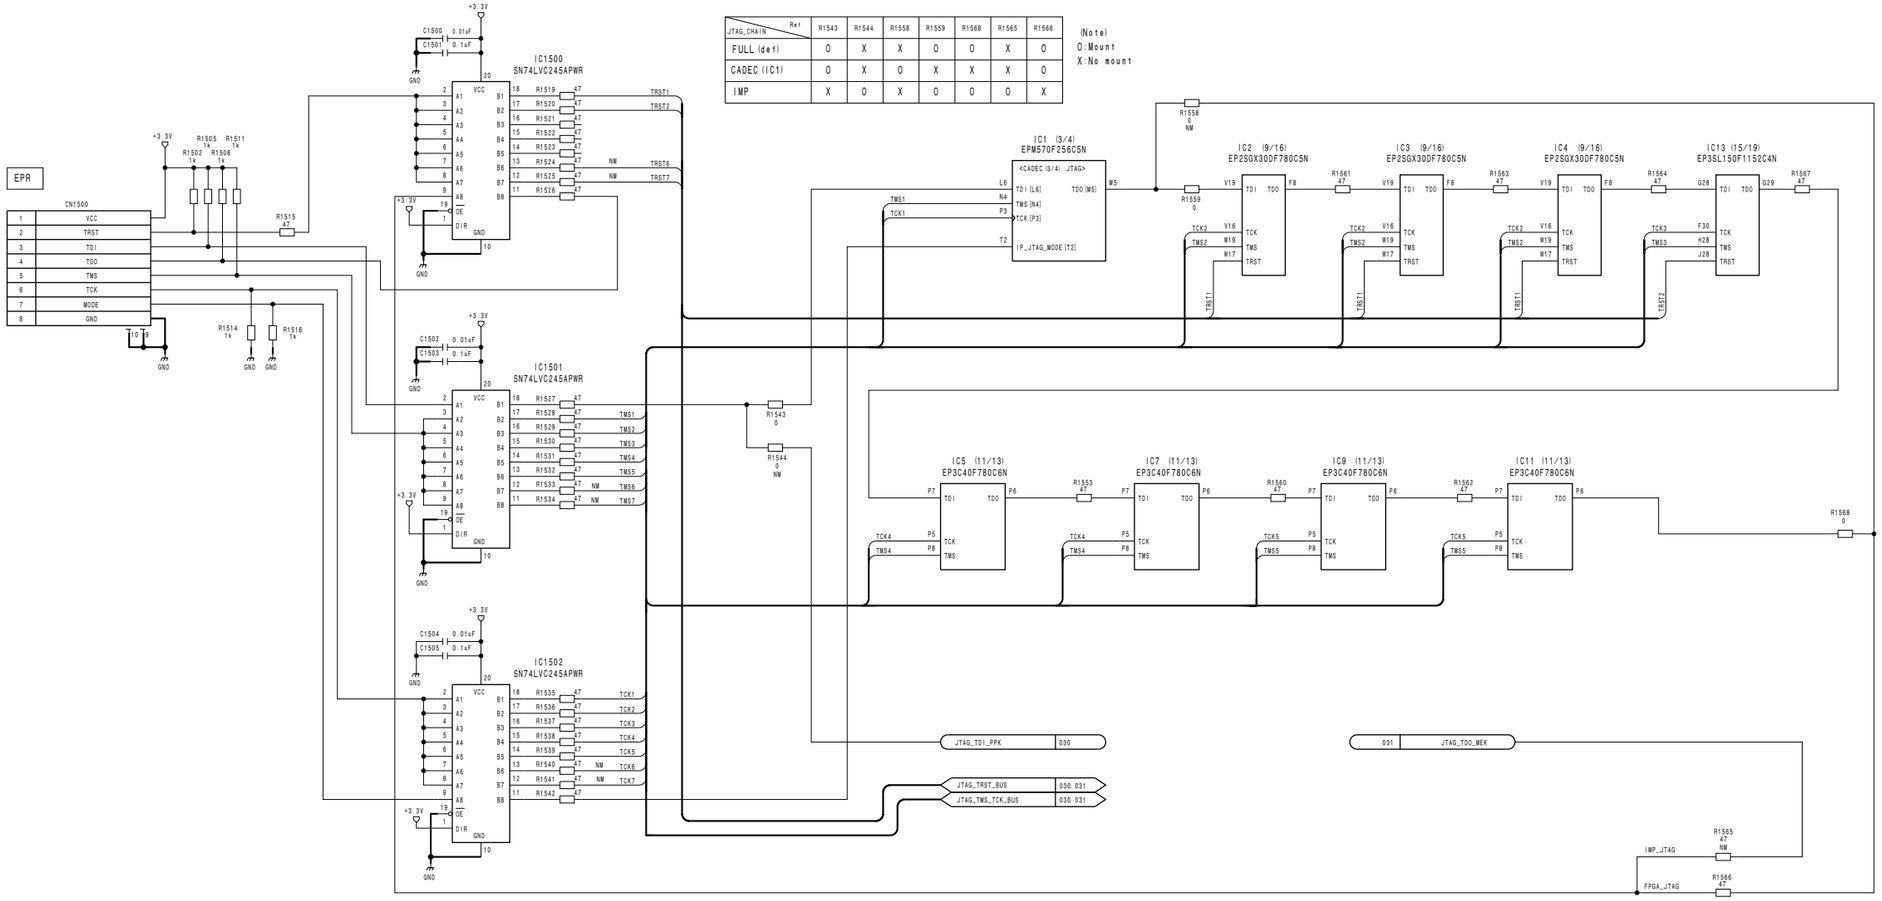

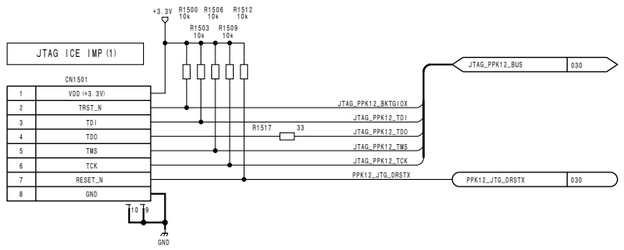

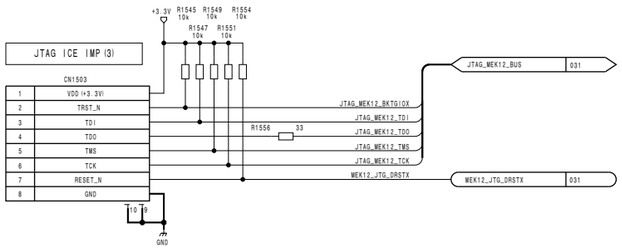


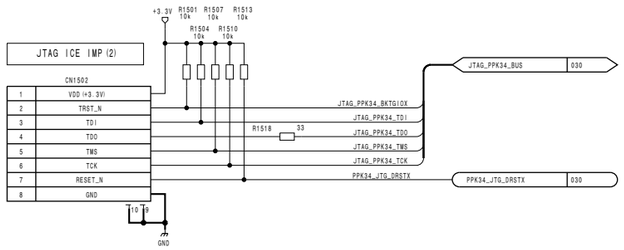

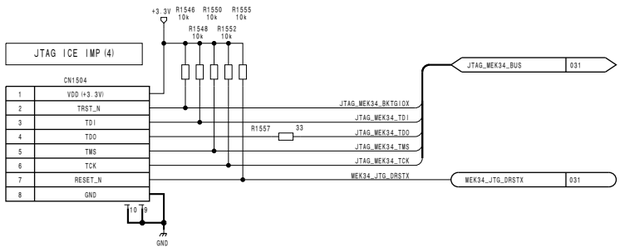


Mix/Effect Board
MIX-52 (15/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_15

MIX-52 (16/40)
SUFFIX: -12

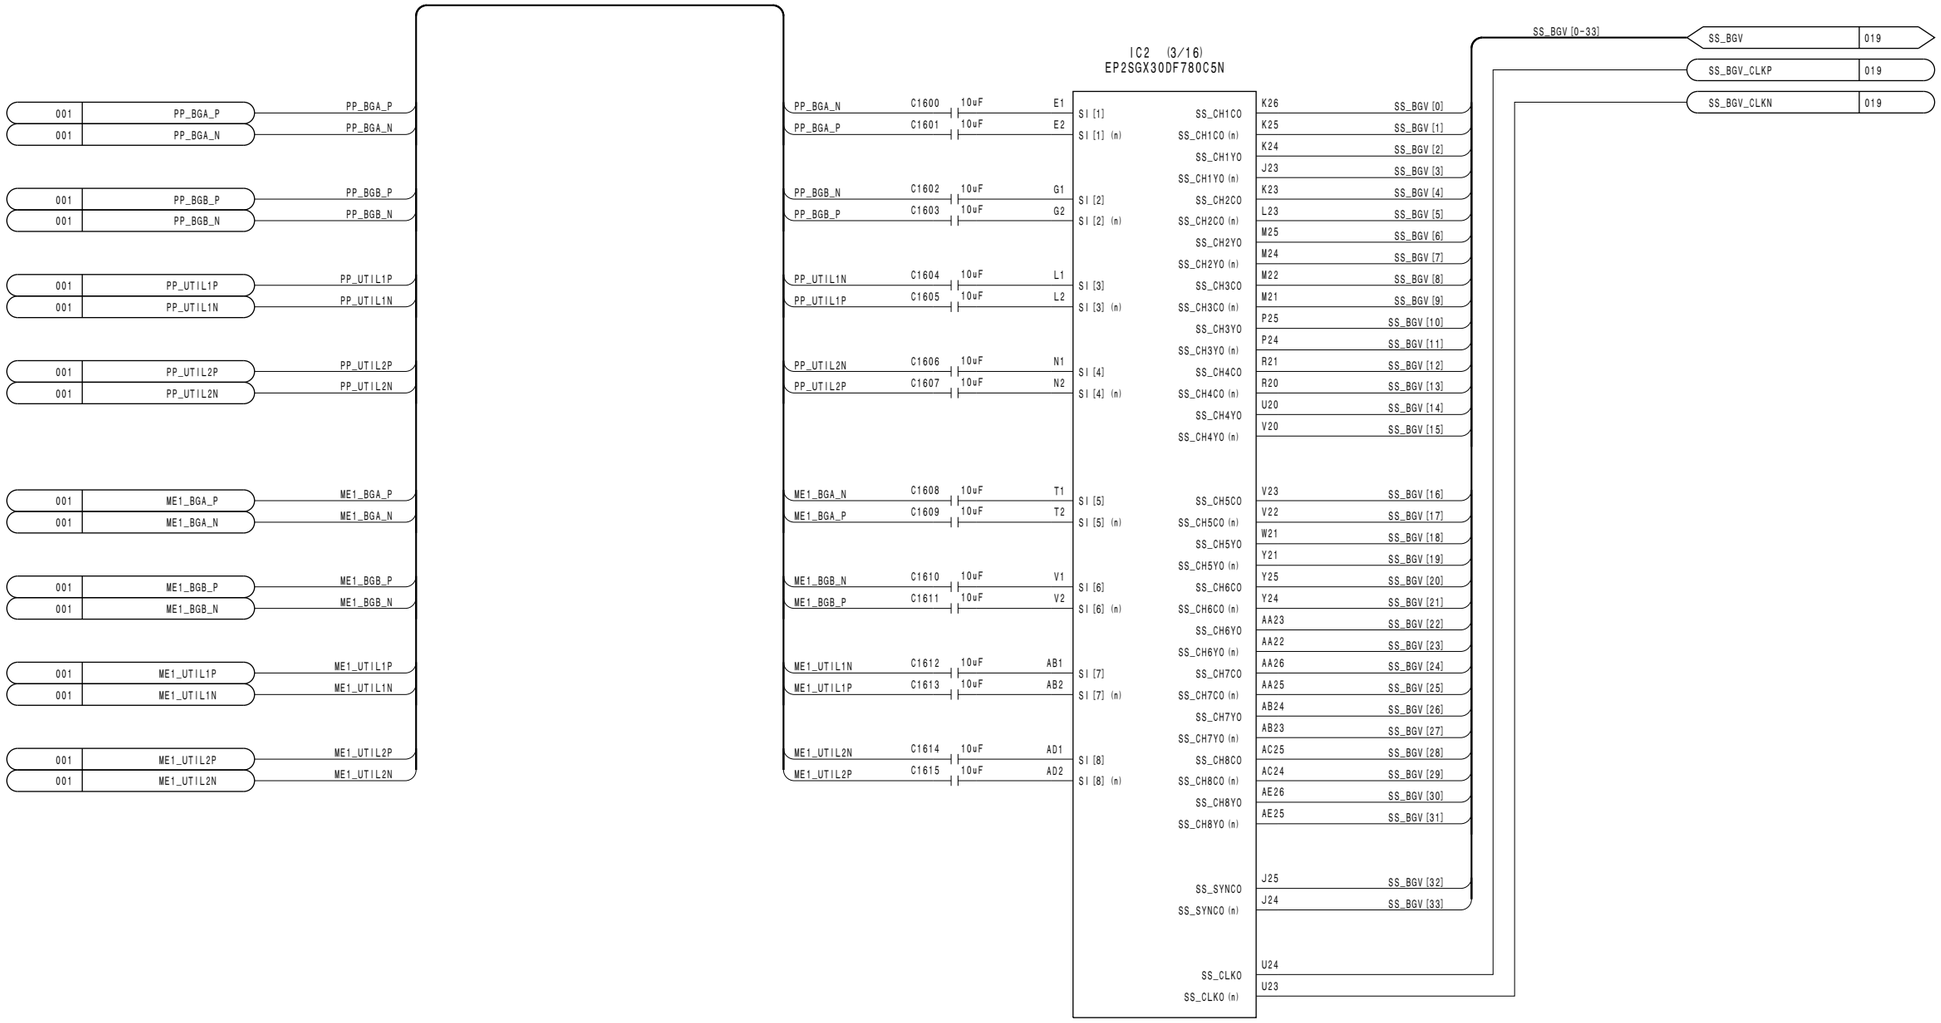

Mix/Effect Board
MIX-52 (16/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_16


MIX-52 (17/40)
SUFFIX: -12

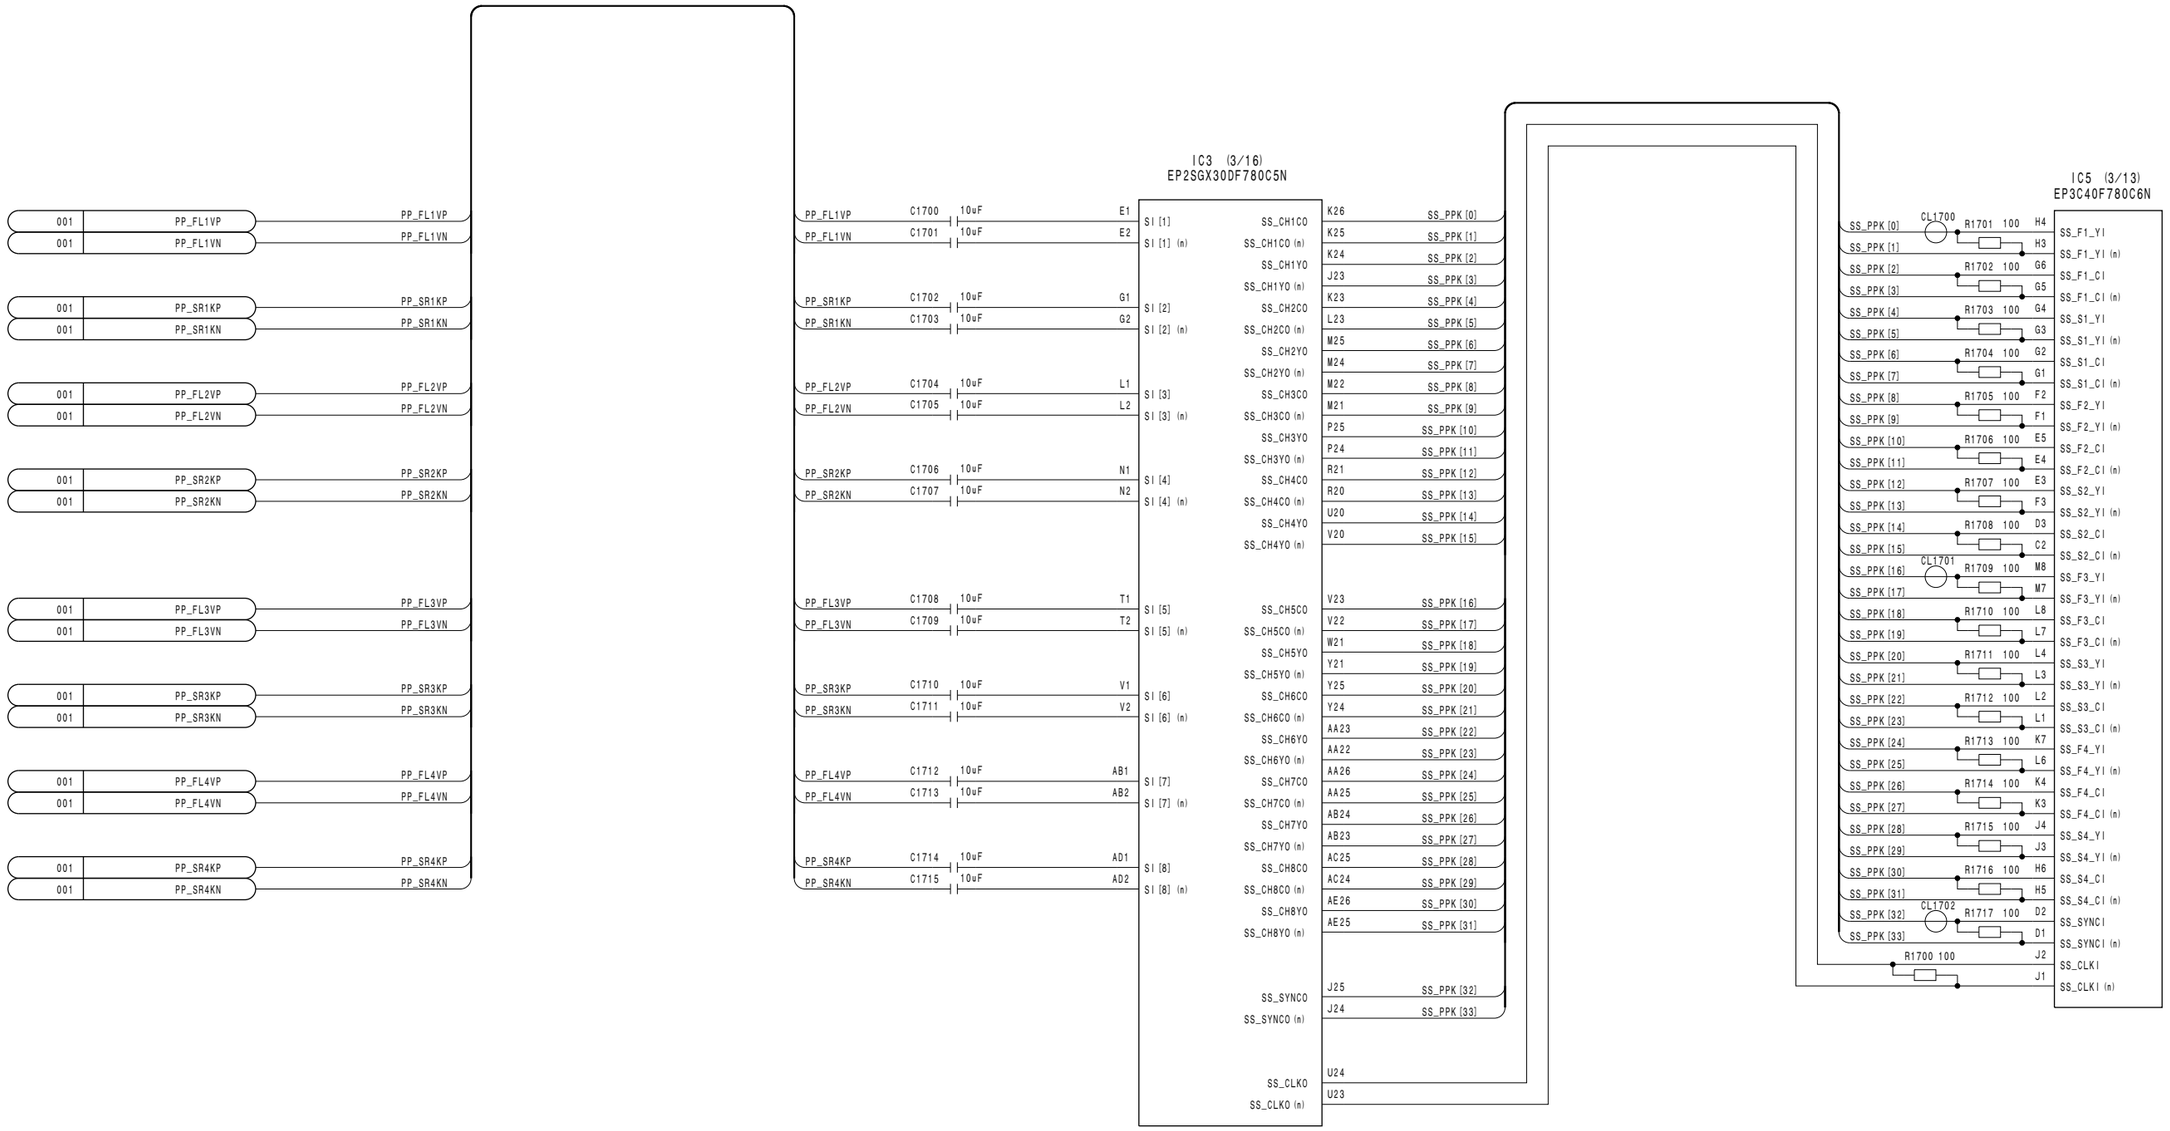


Mix/Effect Board
MIX-52 (17/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_17

4-169

MIX-52 (18/40)
SUFFIX: -12

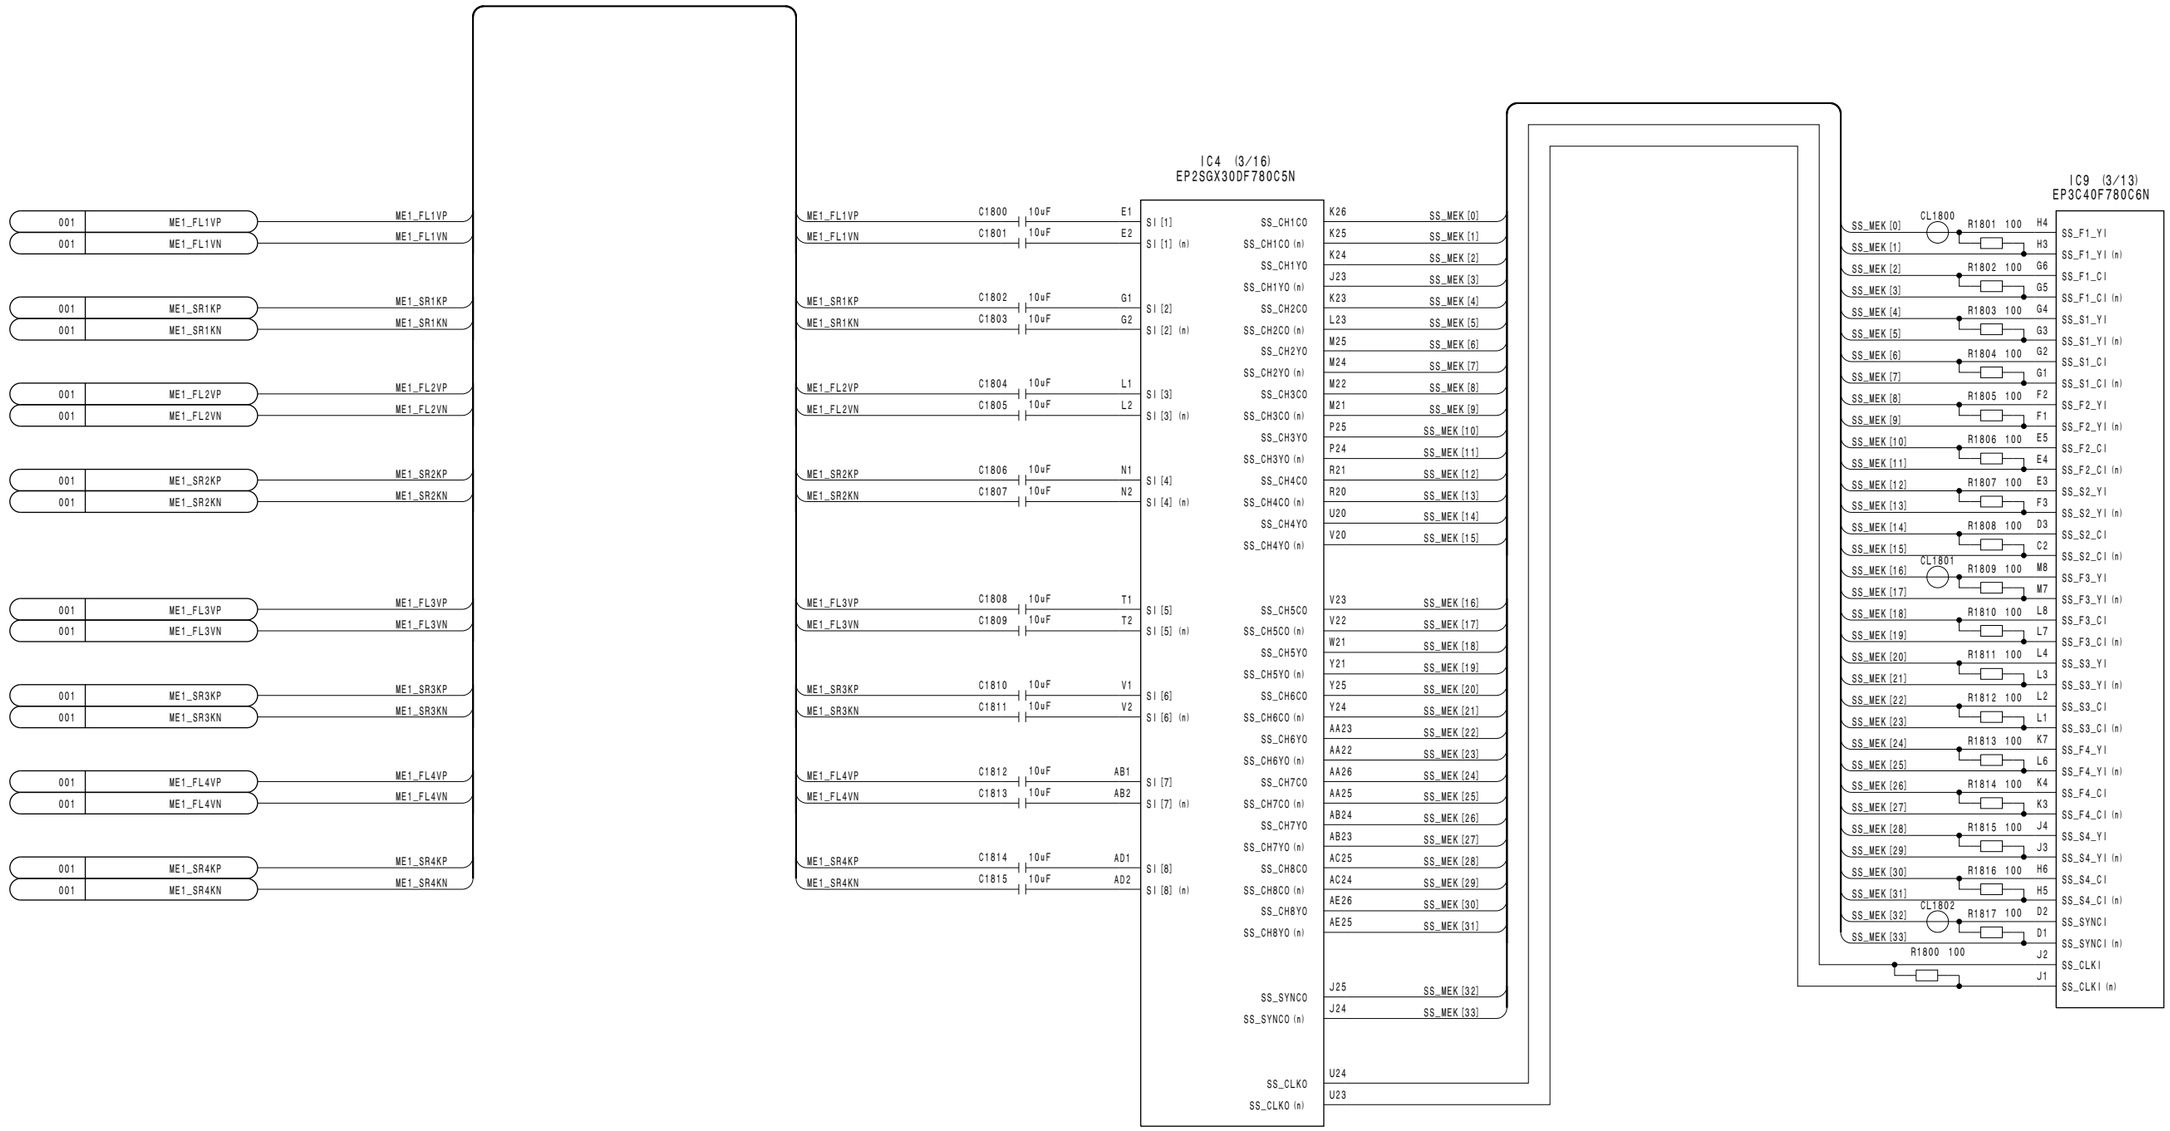



Mix/Effect Board
MIX-52 (18/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_18

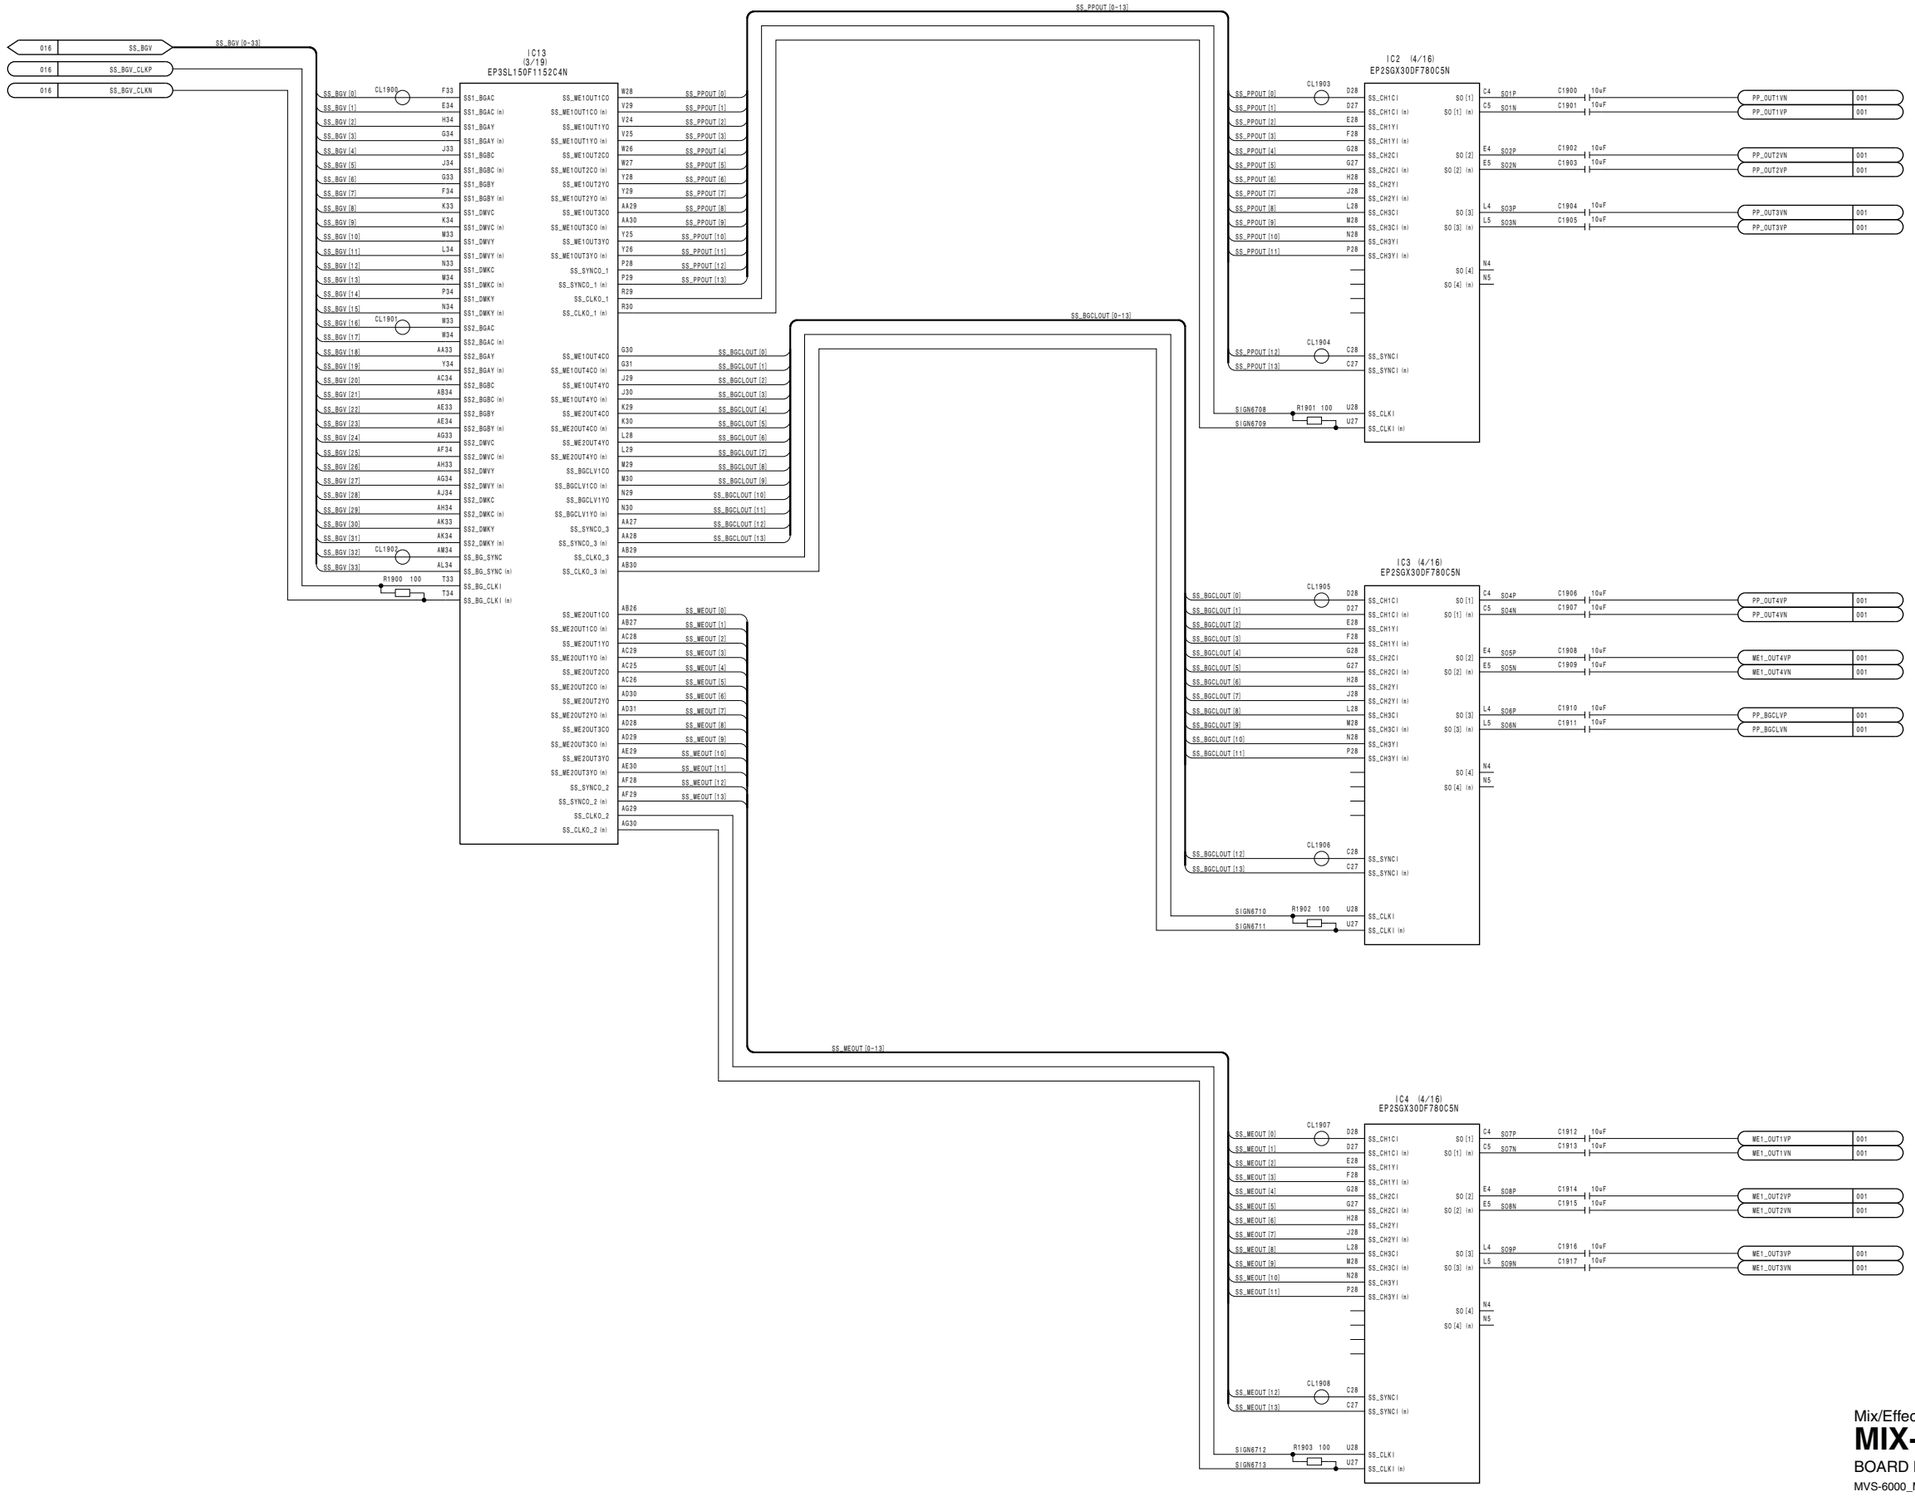

Mix/Effect Board
MIX-52 (19/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_19


MIX-52 (20/40)
SUFFIX: -12

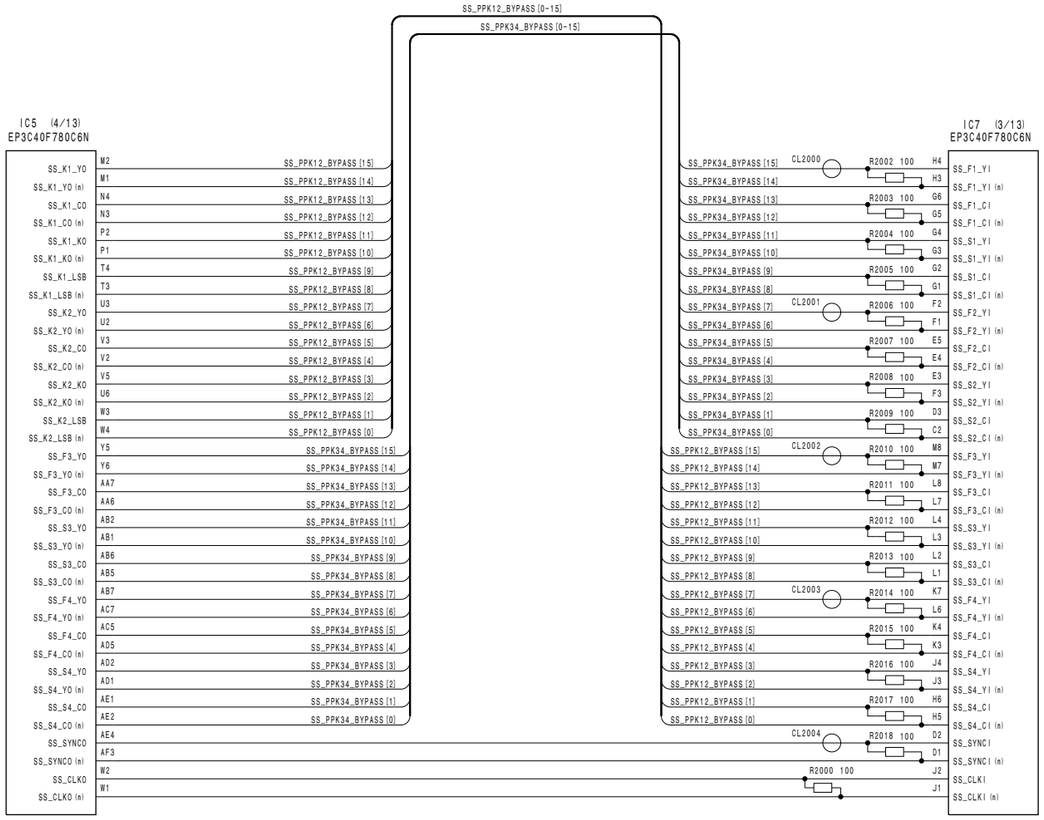


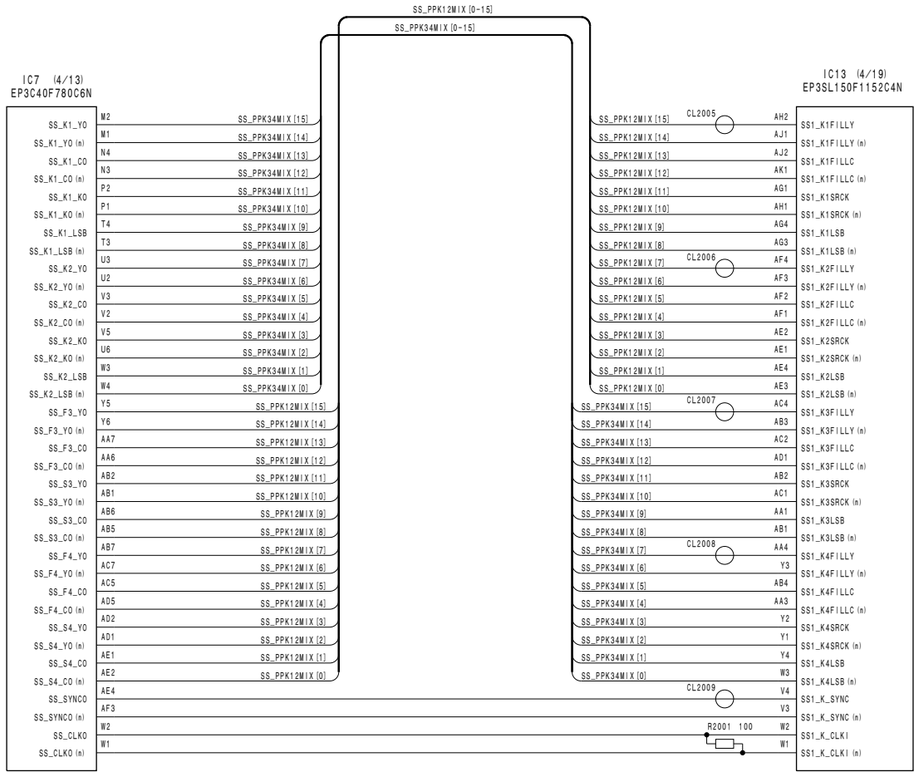

Mix/Effect Board
MIX-52 (20/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_20

MIX-52 (21/40)
SUFFIX: -12

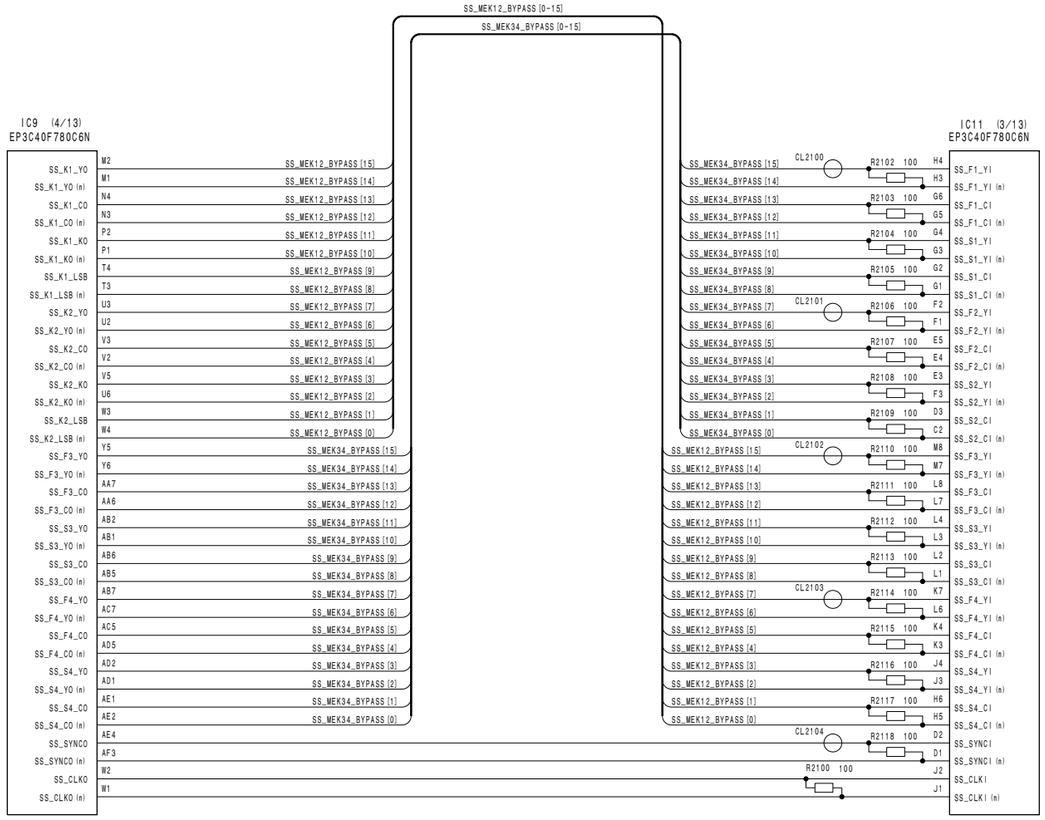


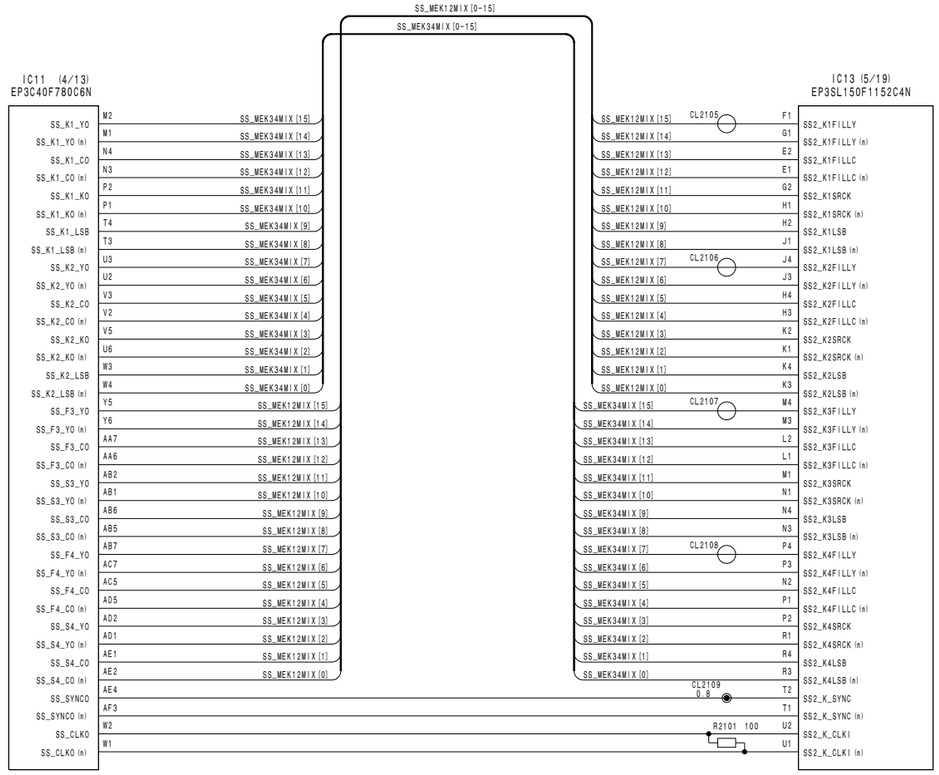


Mix/Effect Board
MIX-52 (21/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_21

4-173

MIX-52 (22/40)
SUFFIX: -12

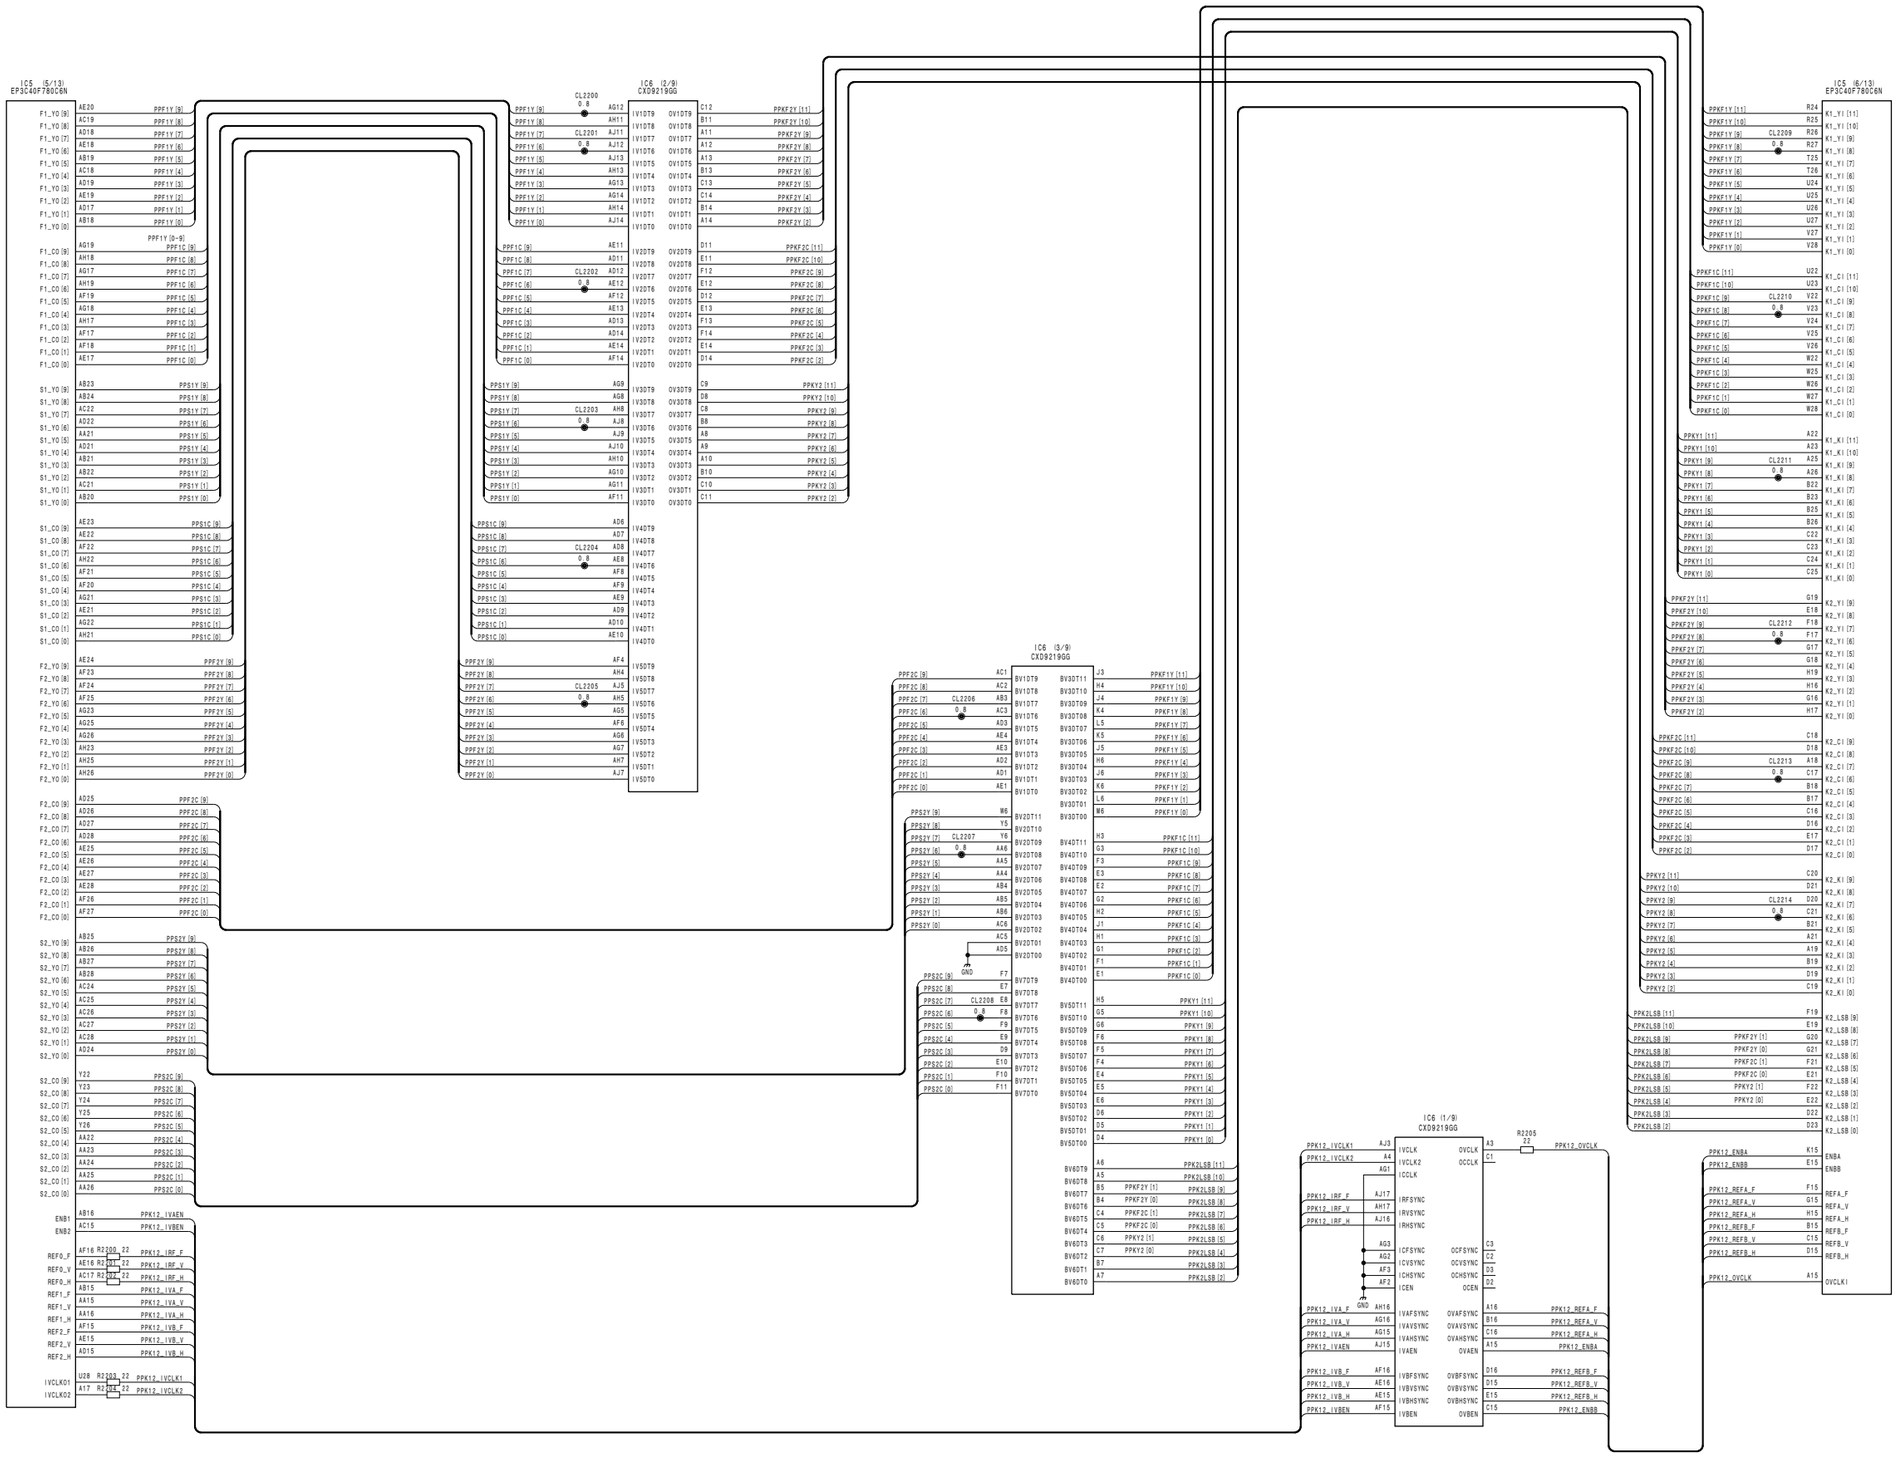


Mix/Effect Board
MIX-52 (22/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_22

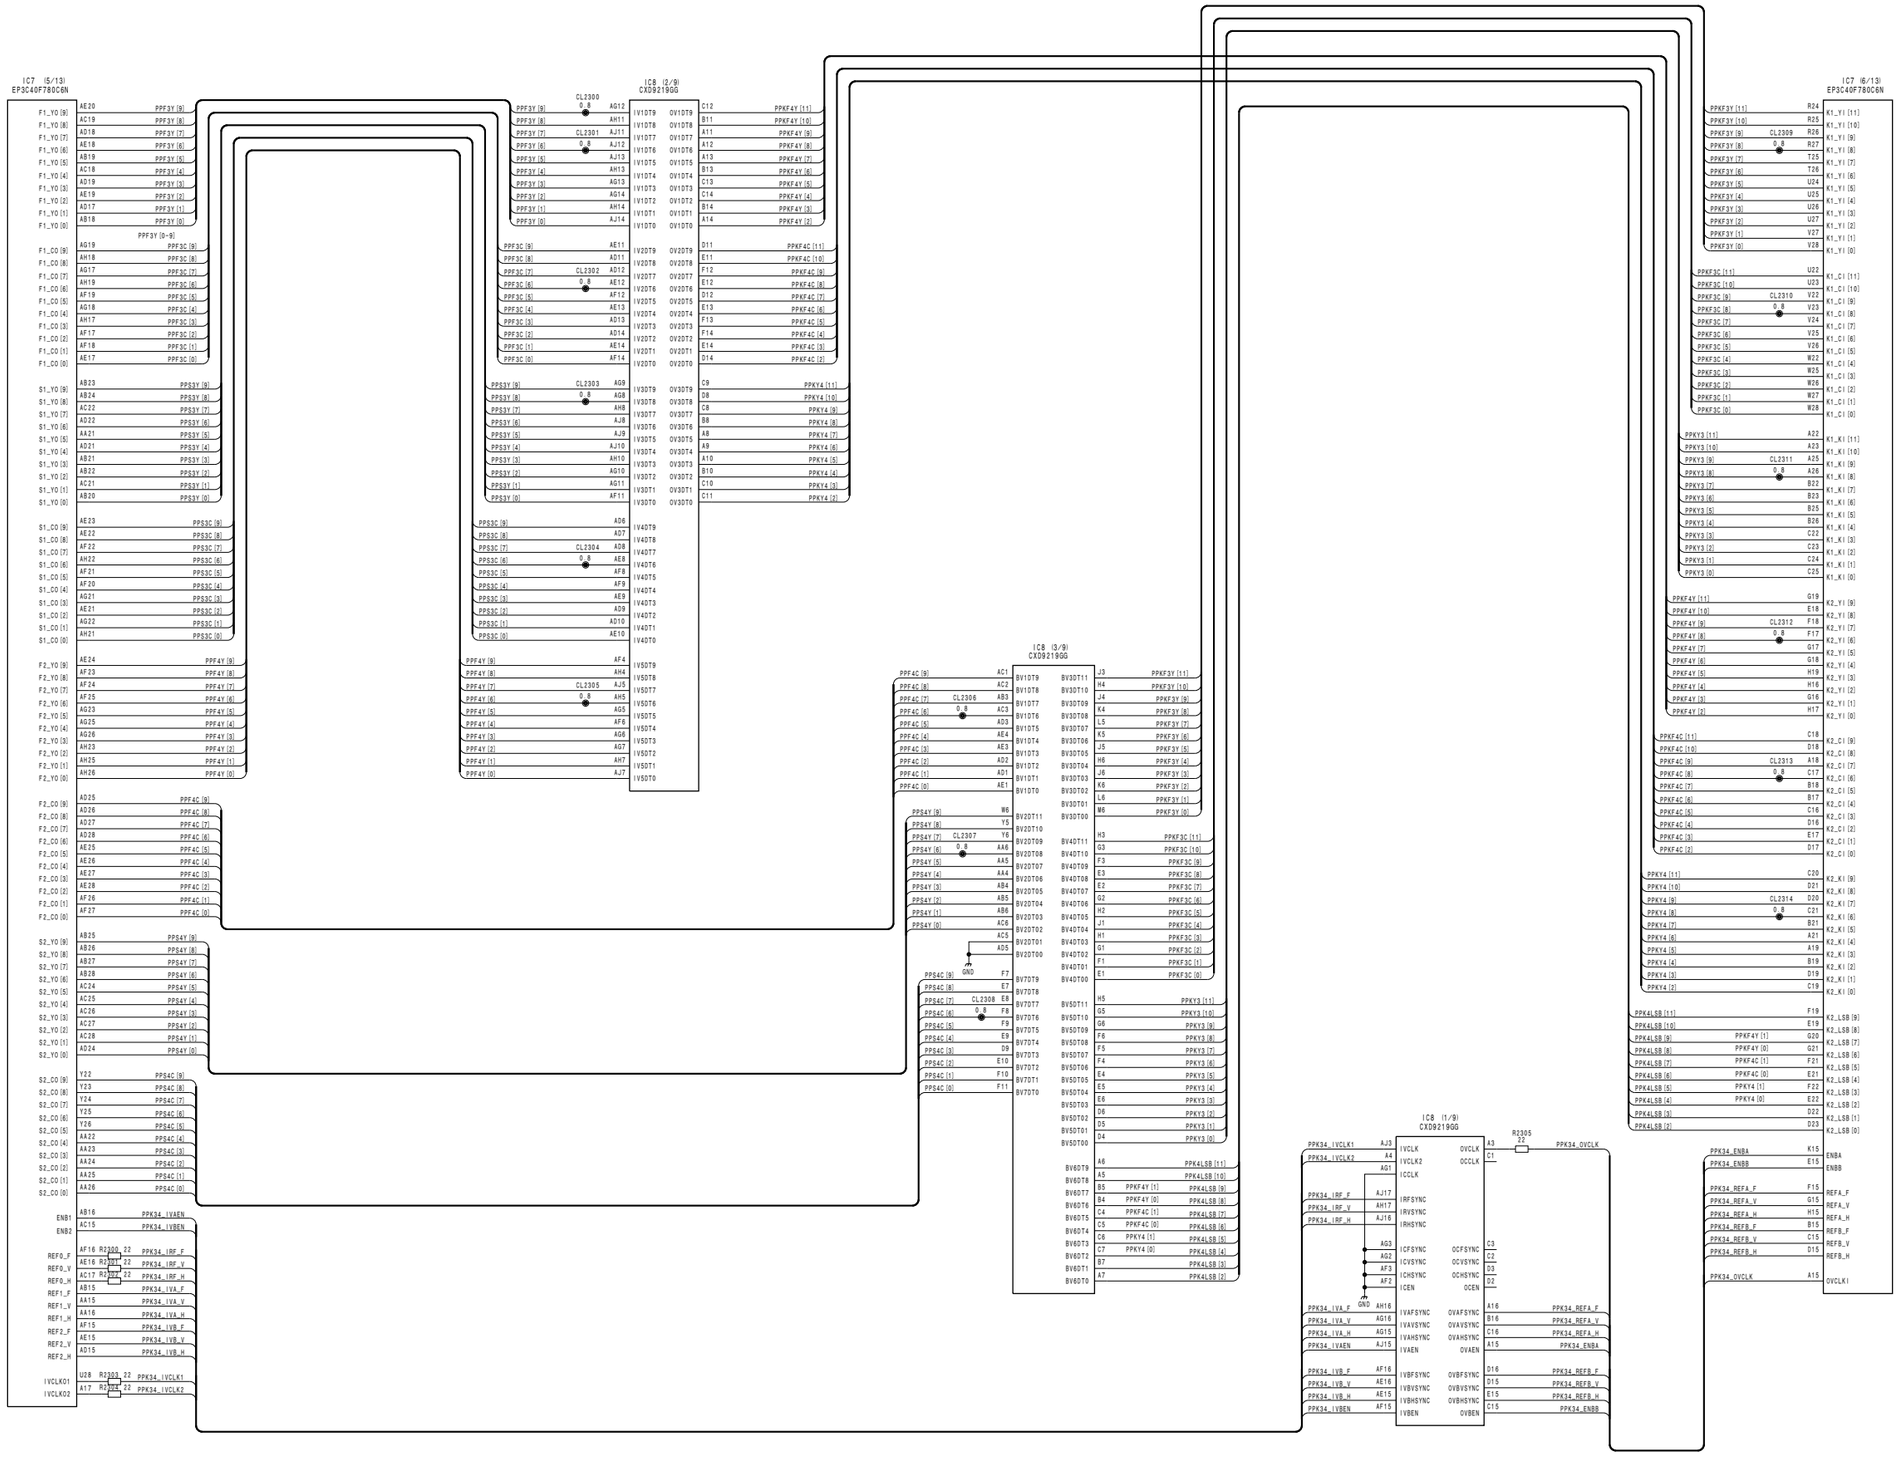

Mix/Effect Board
MIX-52 (23/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_23

MIX-52 (24/40)
SUFFIX: -12

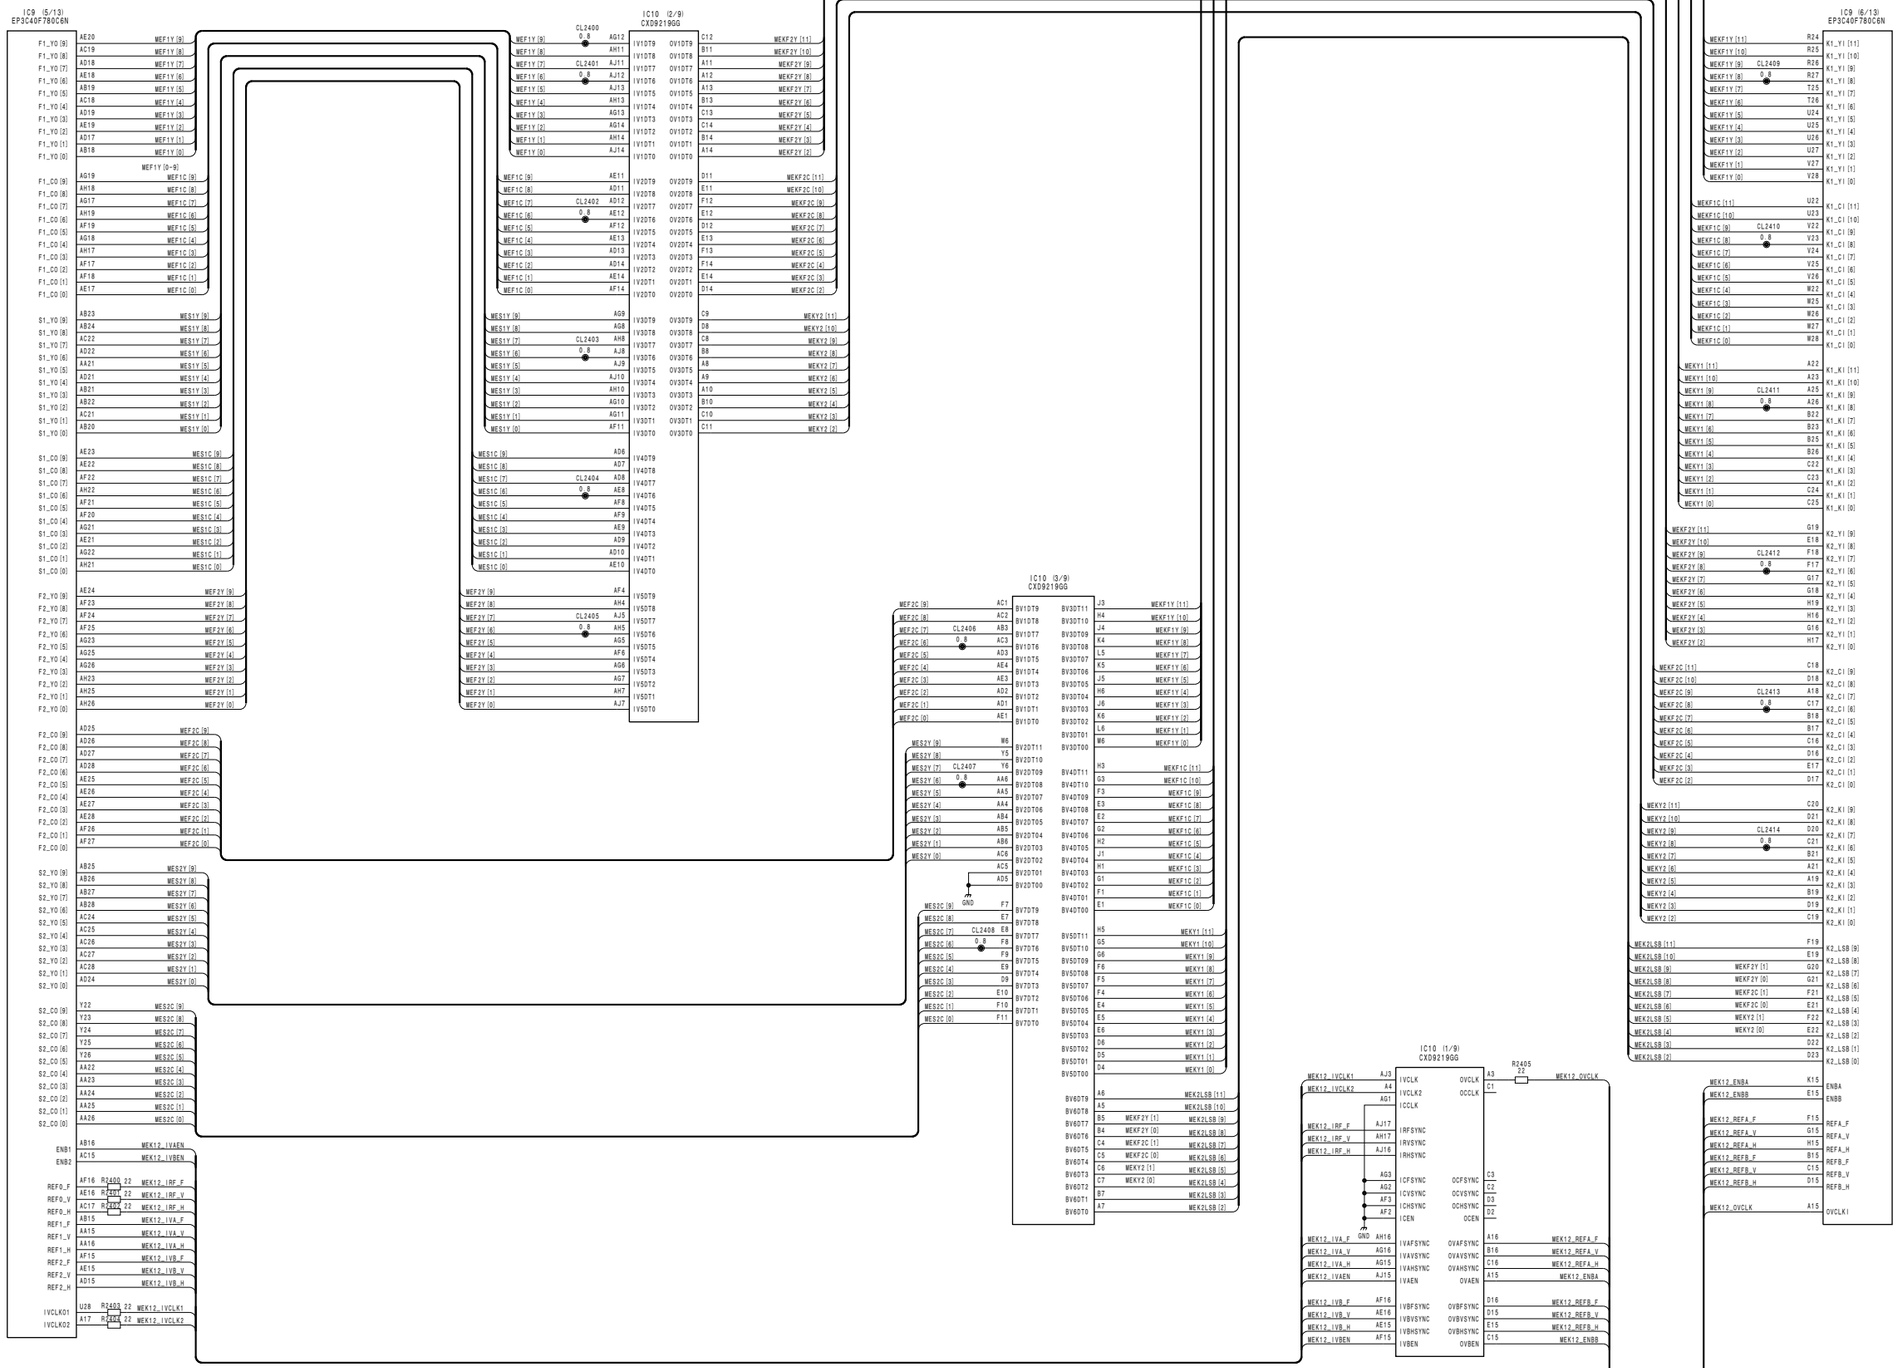


Mix/Effect Board
MIX-52 (24/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_24

4-176


MVS-6000 MM

MIX-52 (25/40)
SUFFIX: -12

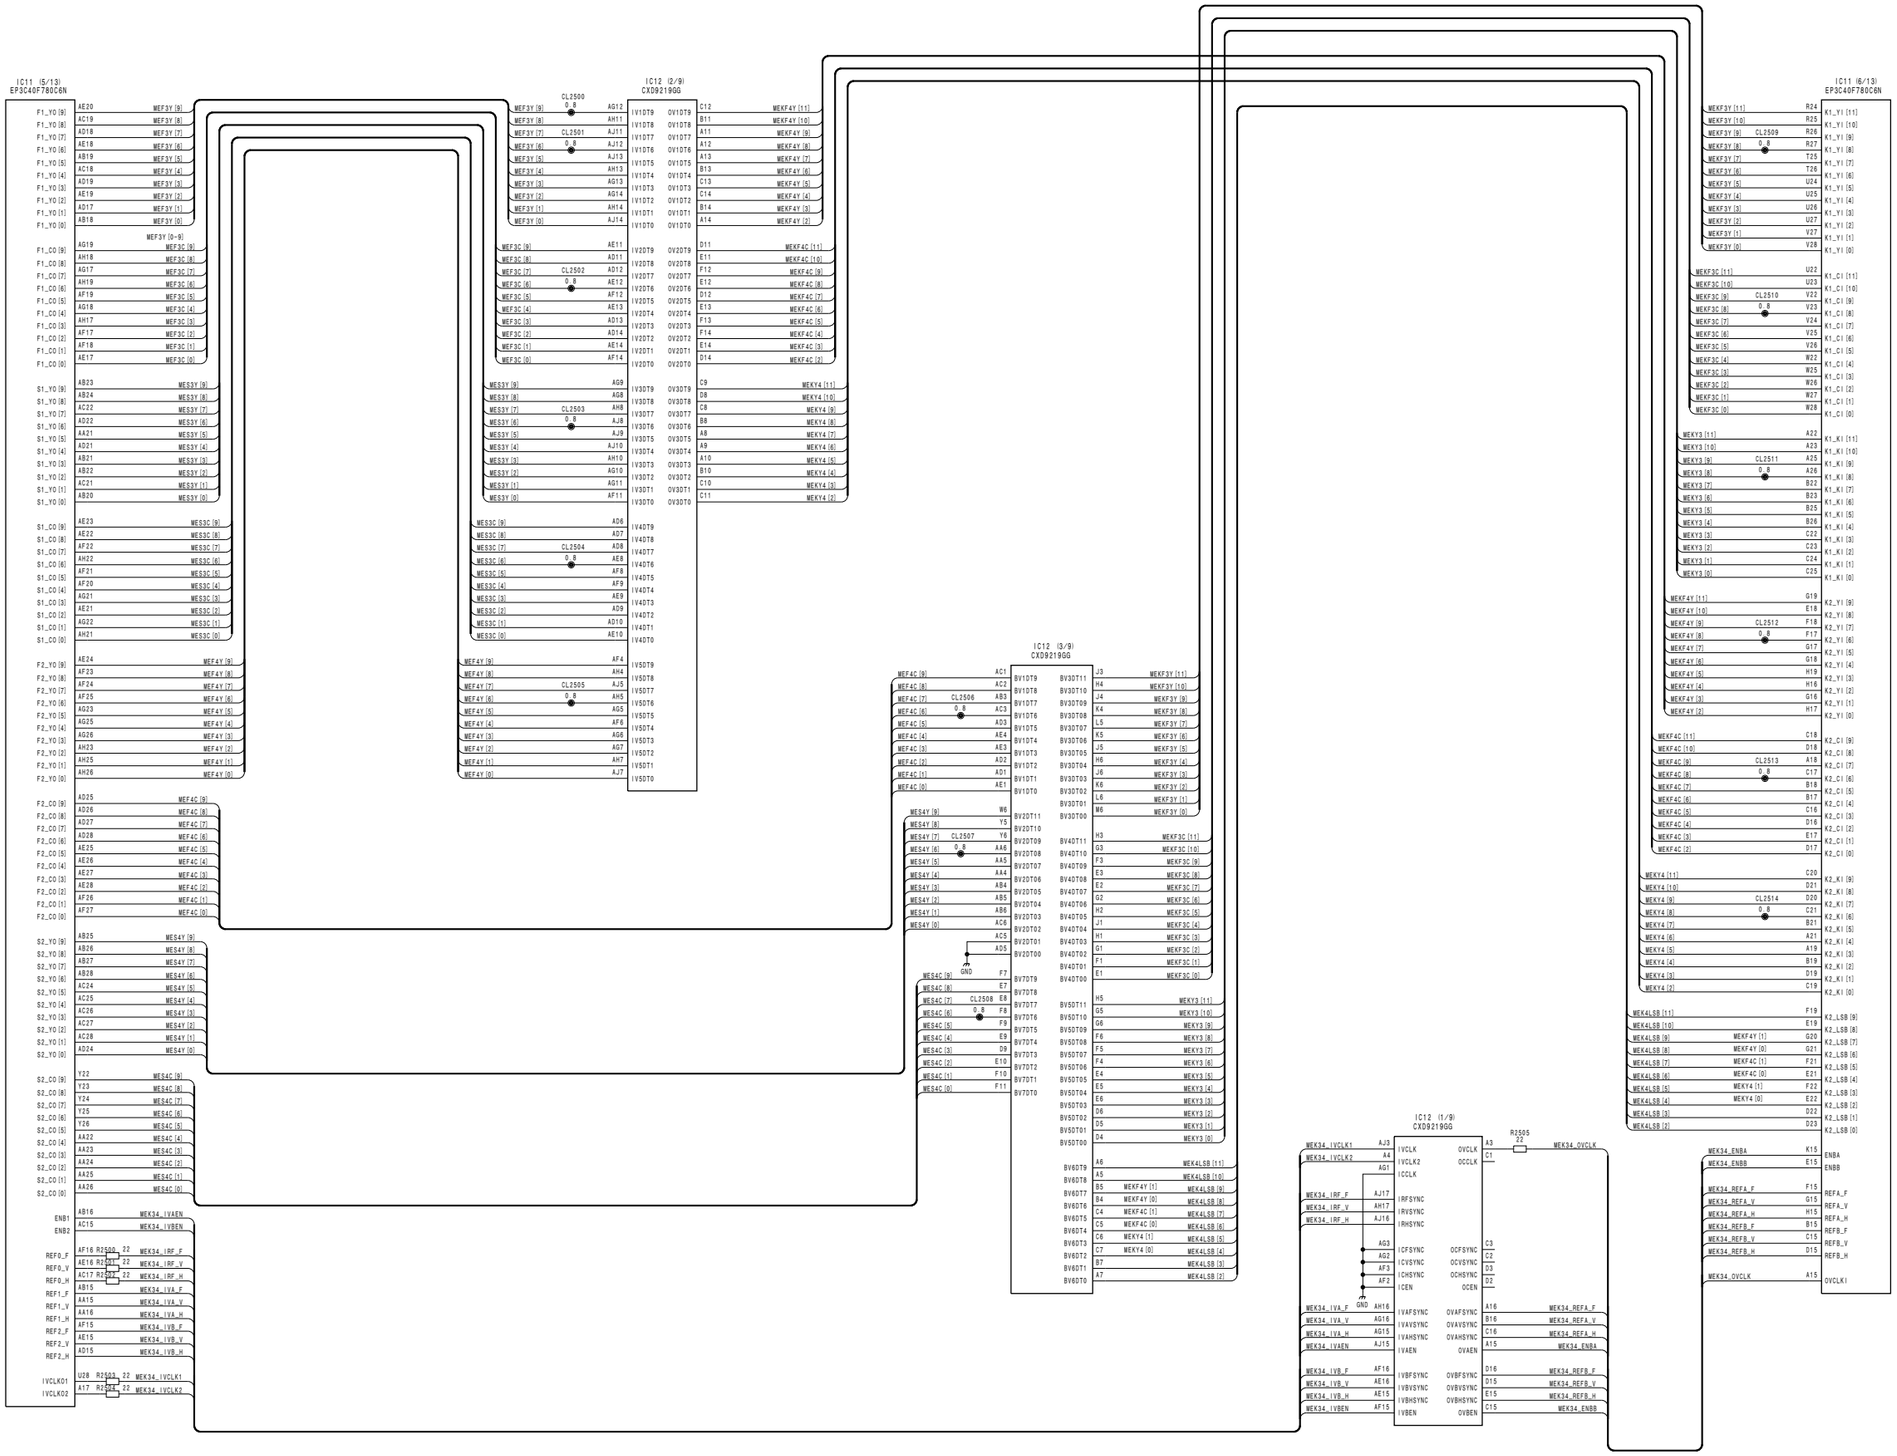

Mix/Effect Board
MIX-52 (25/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_25


MIX-52 (26/40) **SUFFIX: -12**

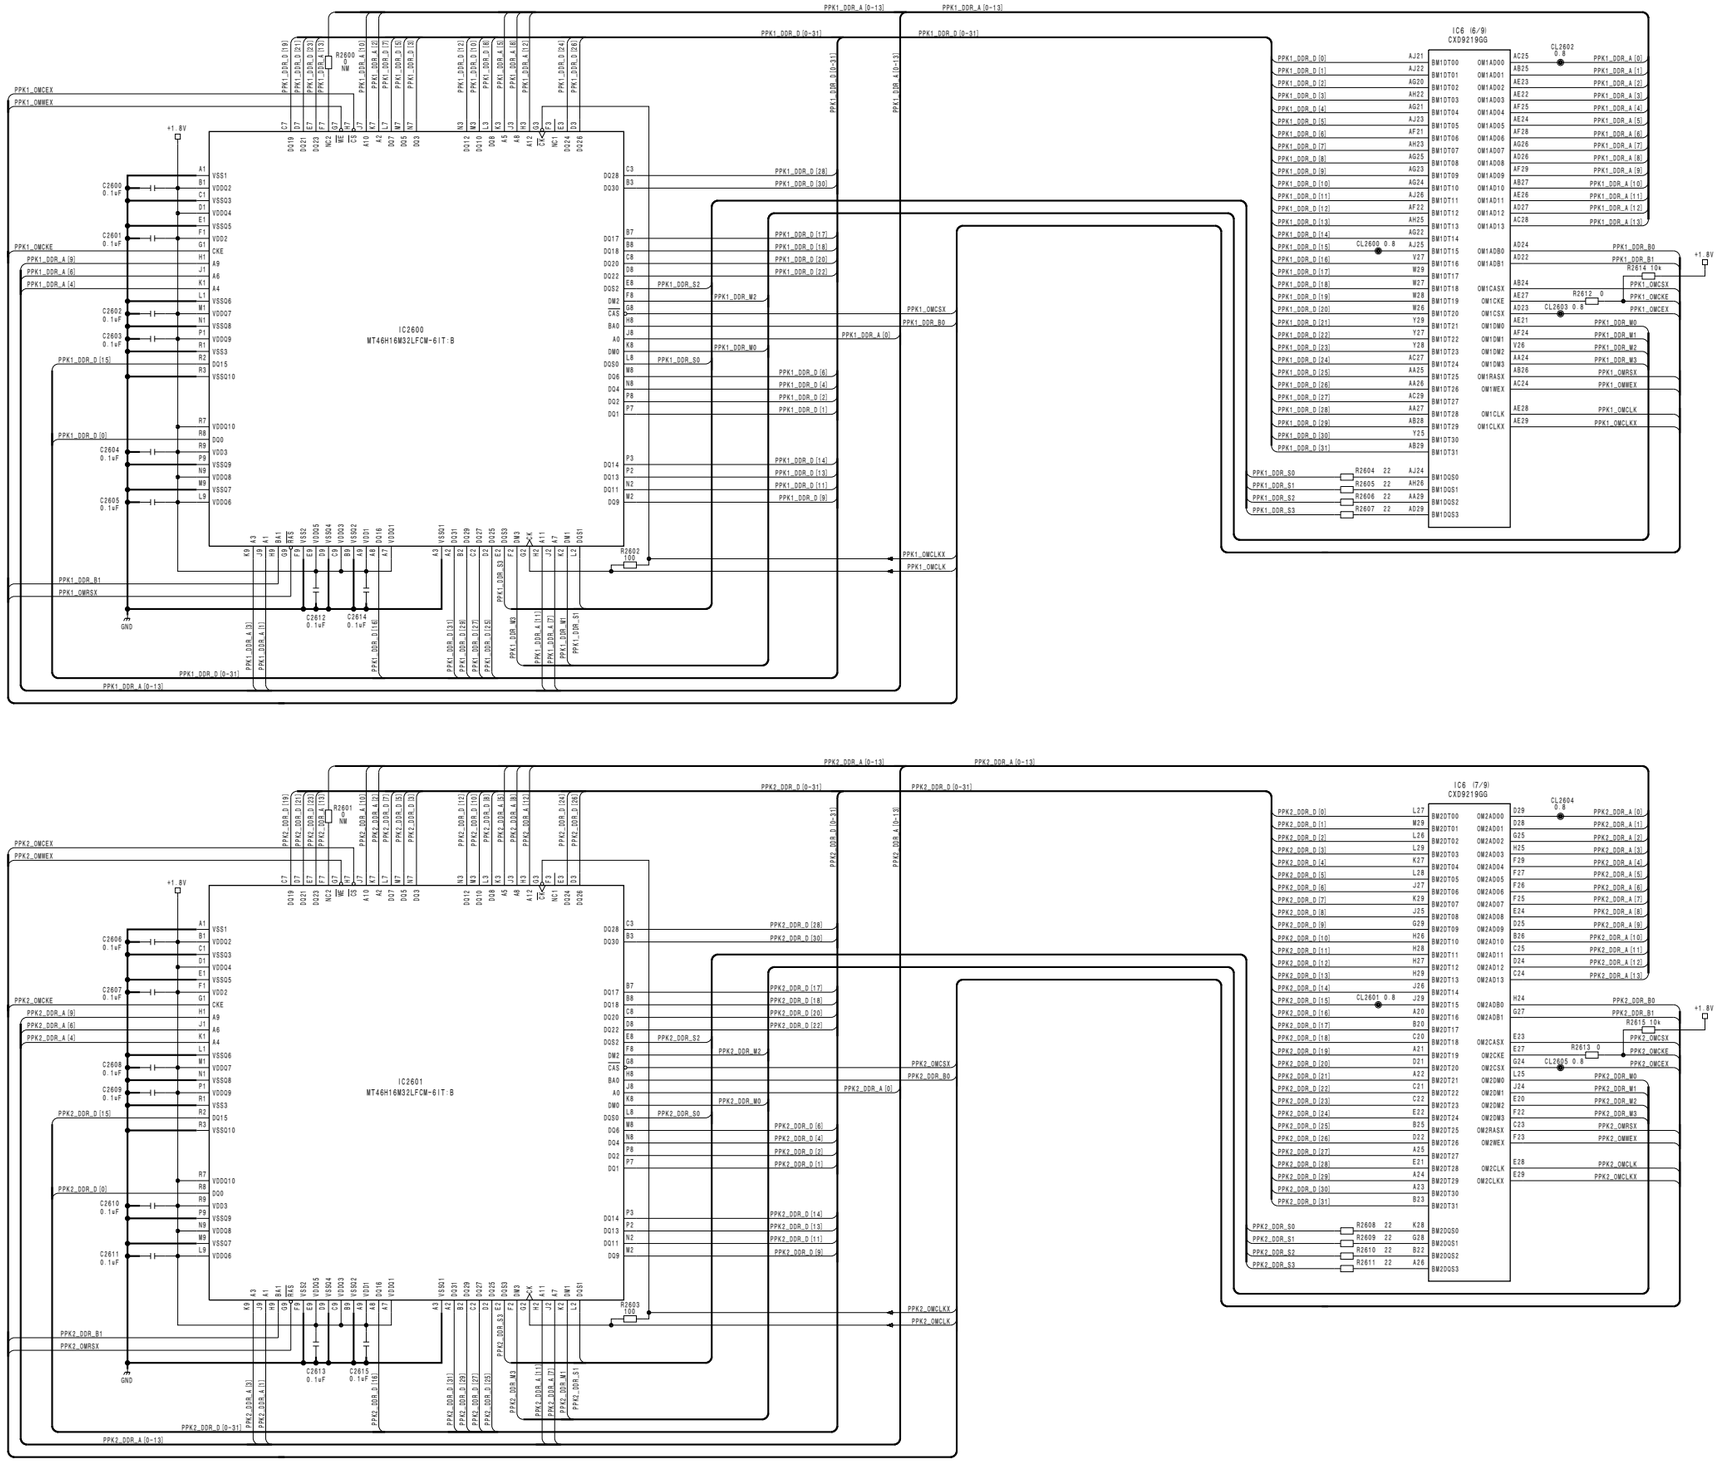


4-178

Mix/Effect Board
MIX-52 (26/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_26


MIX-52 (27/40) **SUFFIX: -12**

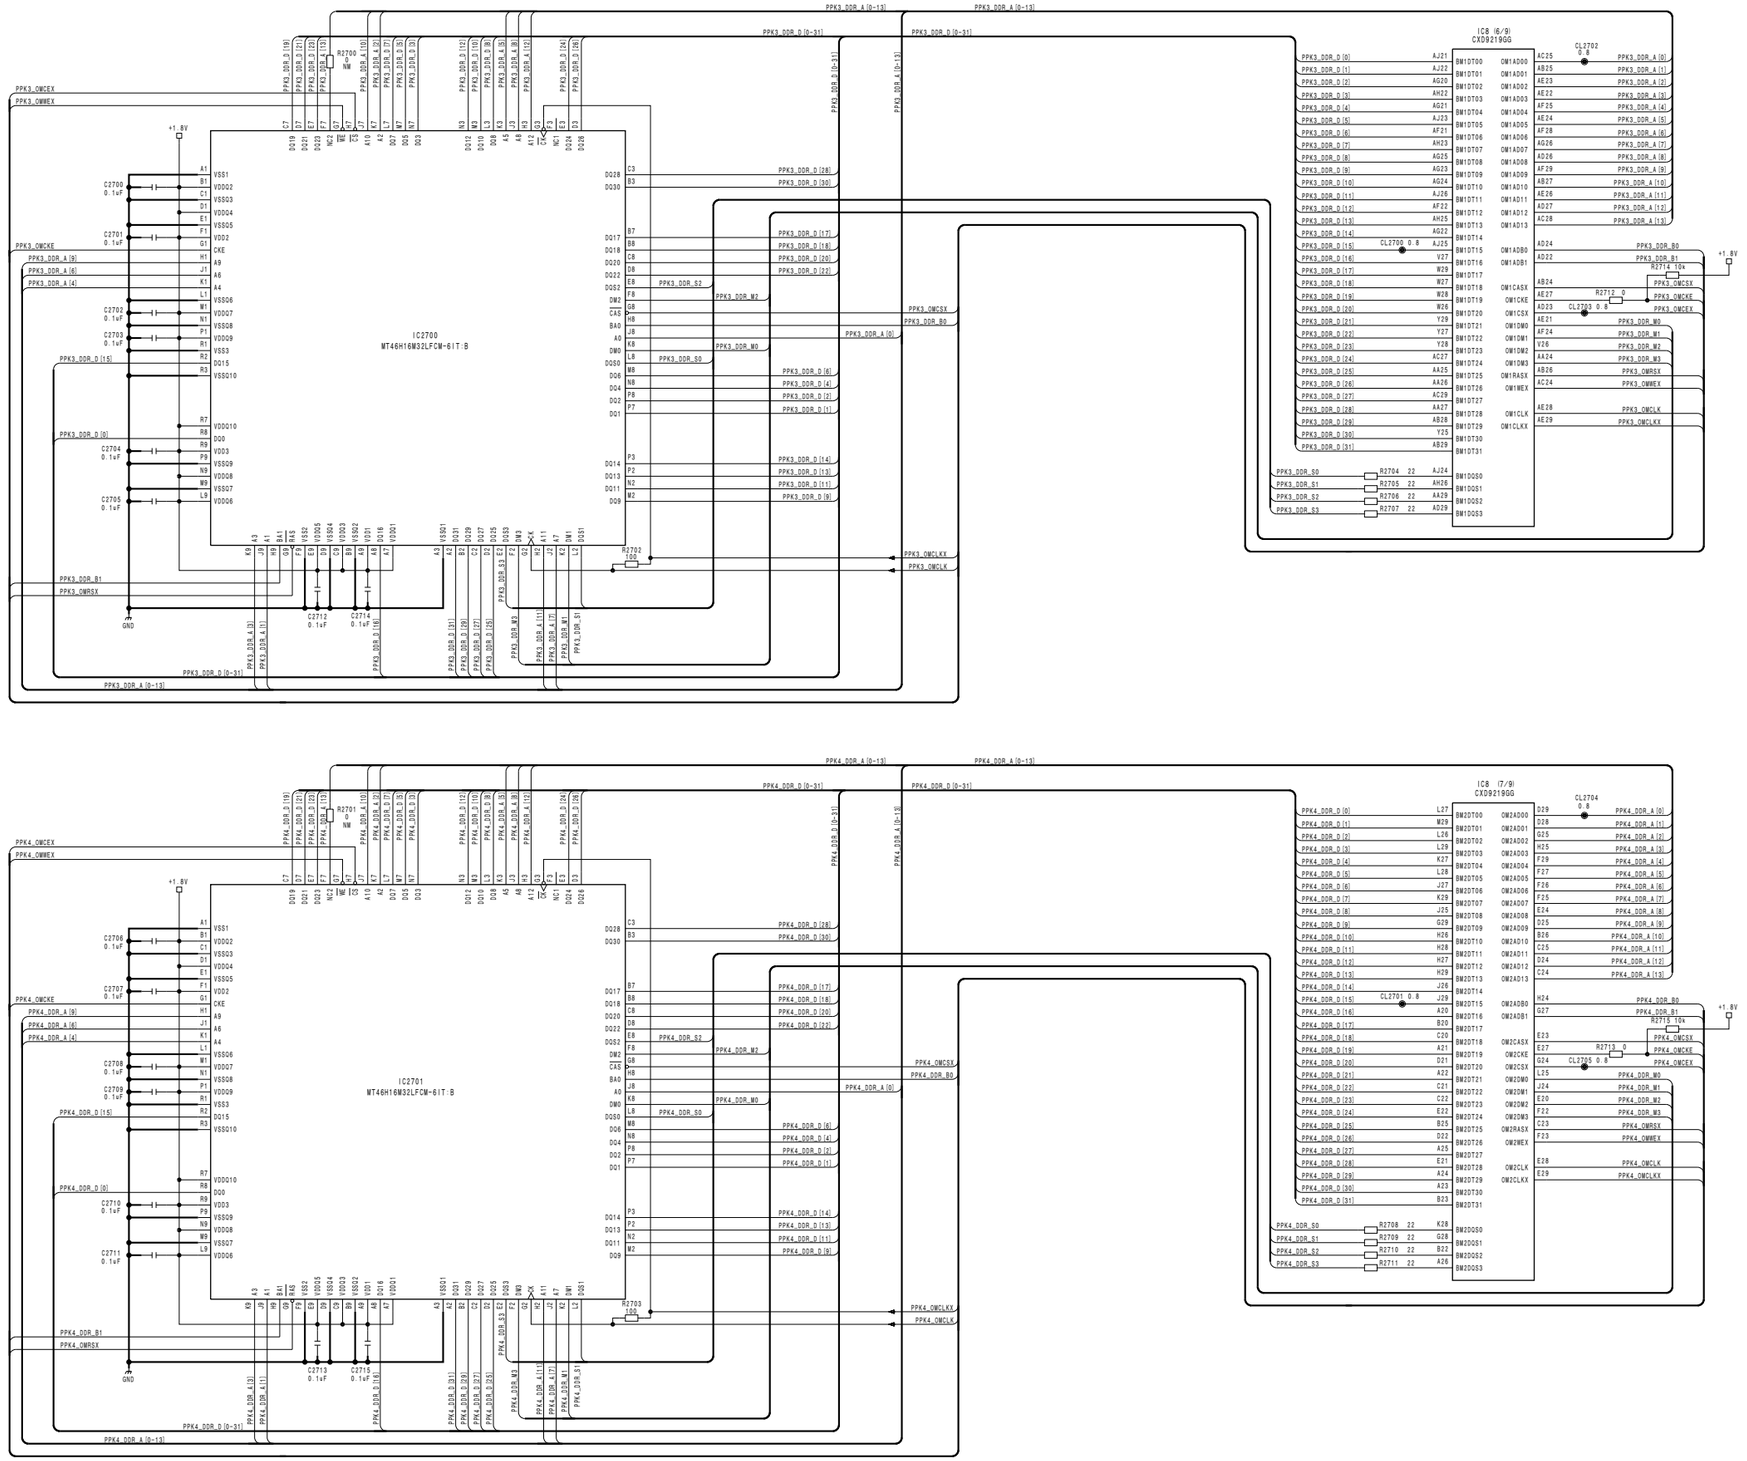

Mix/Effect Board
MIX-52 (27/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_27

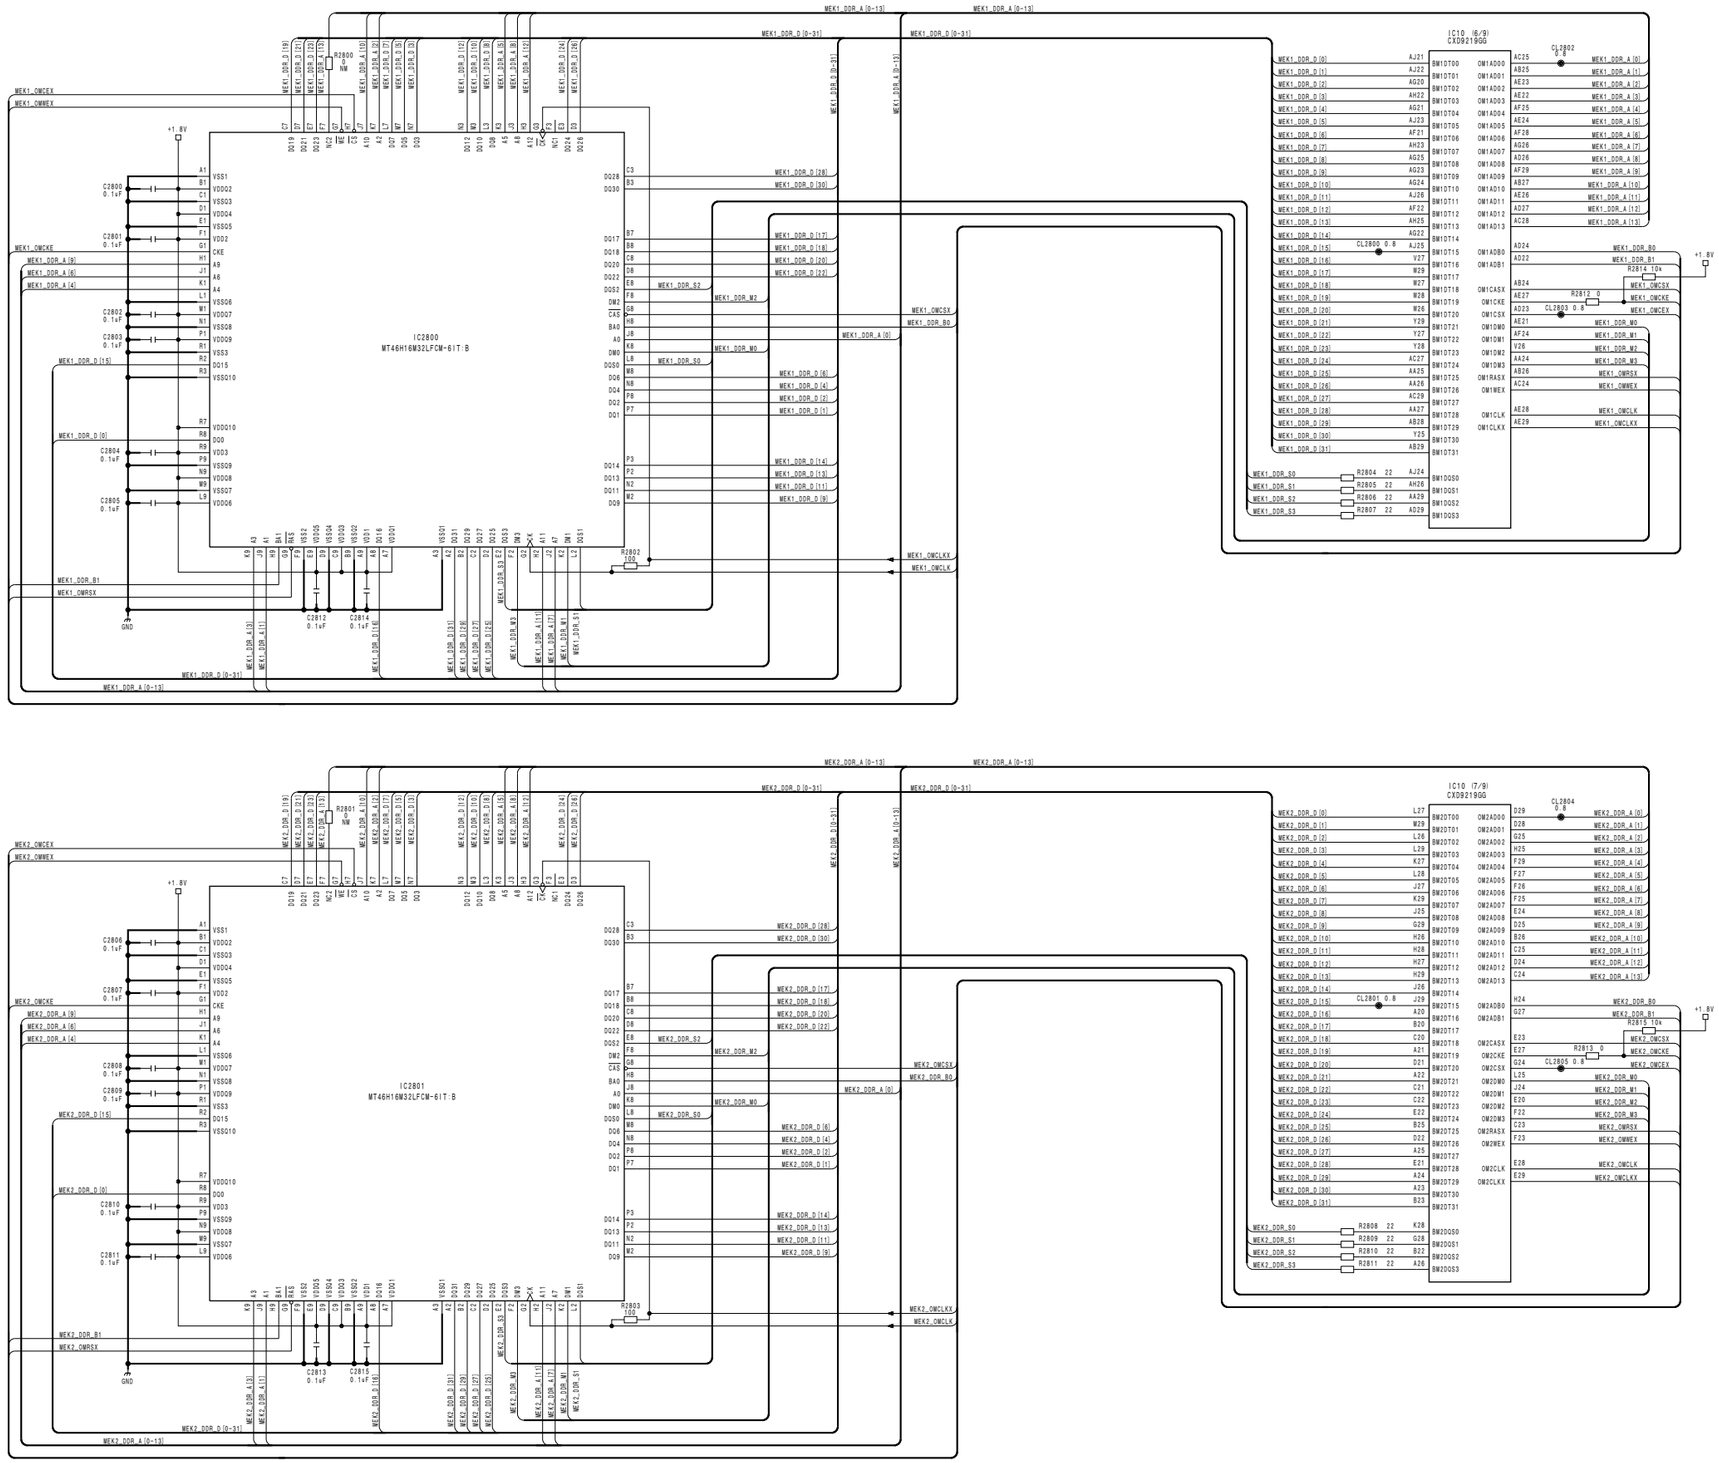


Mix/Effect Board
MIX-52 (28/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_28

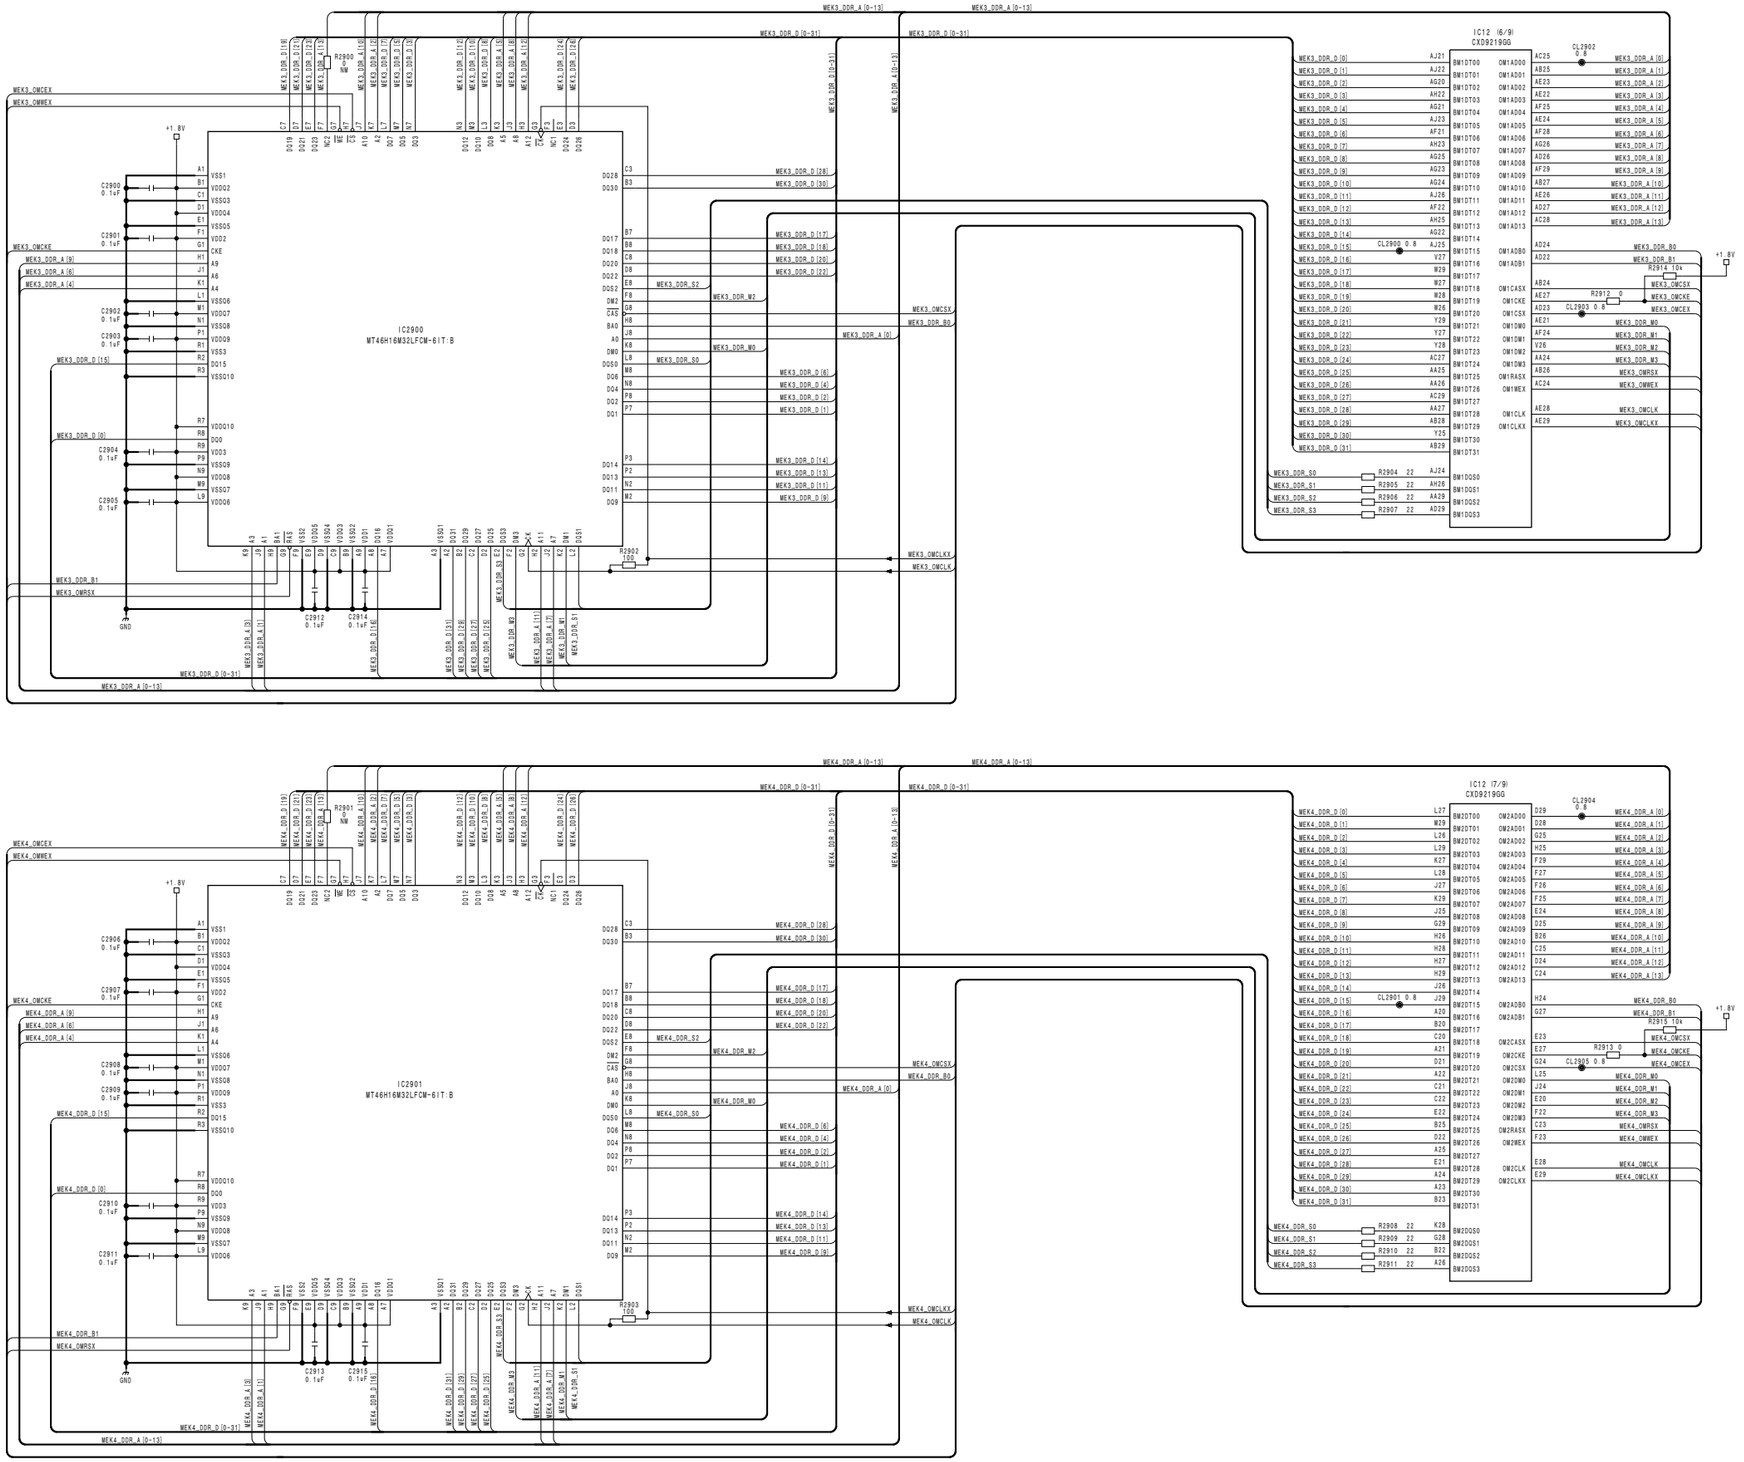


Mix/Effect Board
MIX-52 (29/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_29

MIX-52 (30/40)
SUFFIX: -12

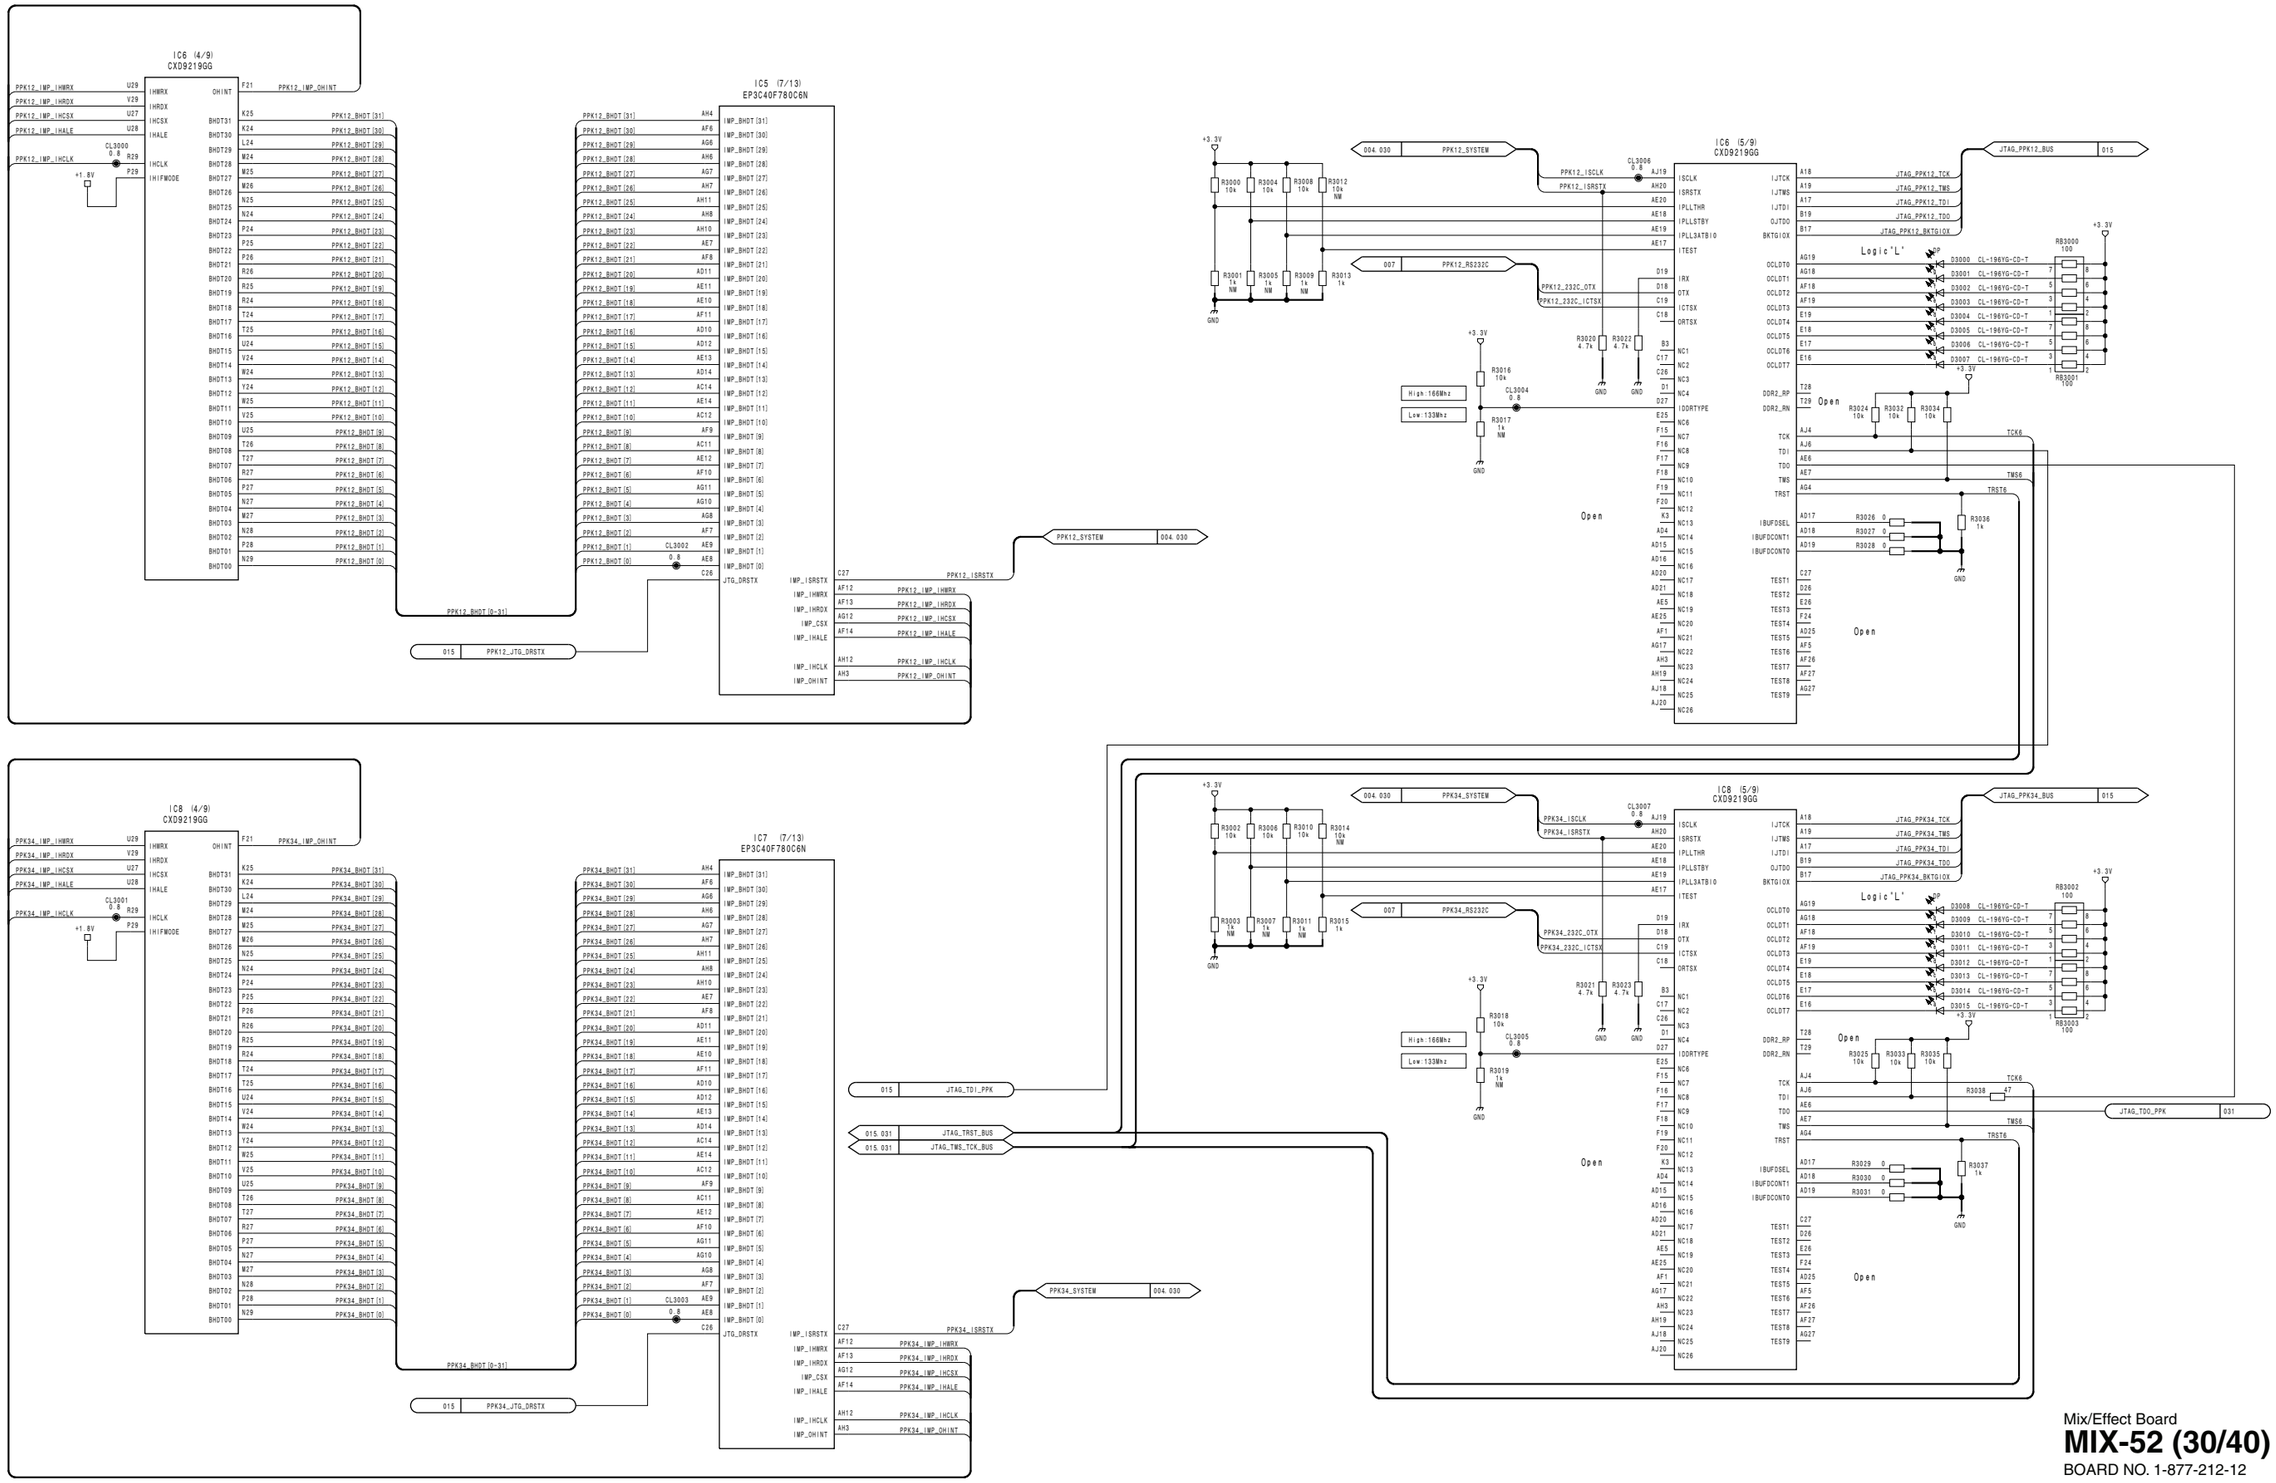


Mix/Effect Board
MIX-52 (30/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_30


MIX-52 (31/40) **SUFFIX: -12**

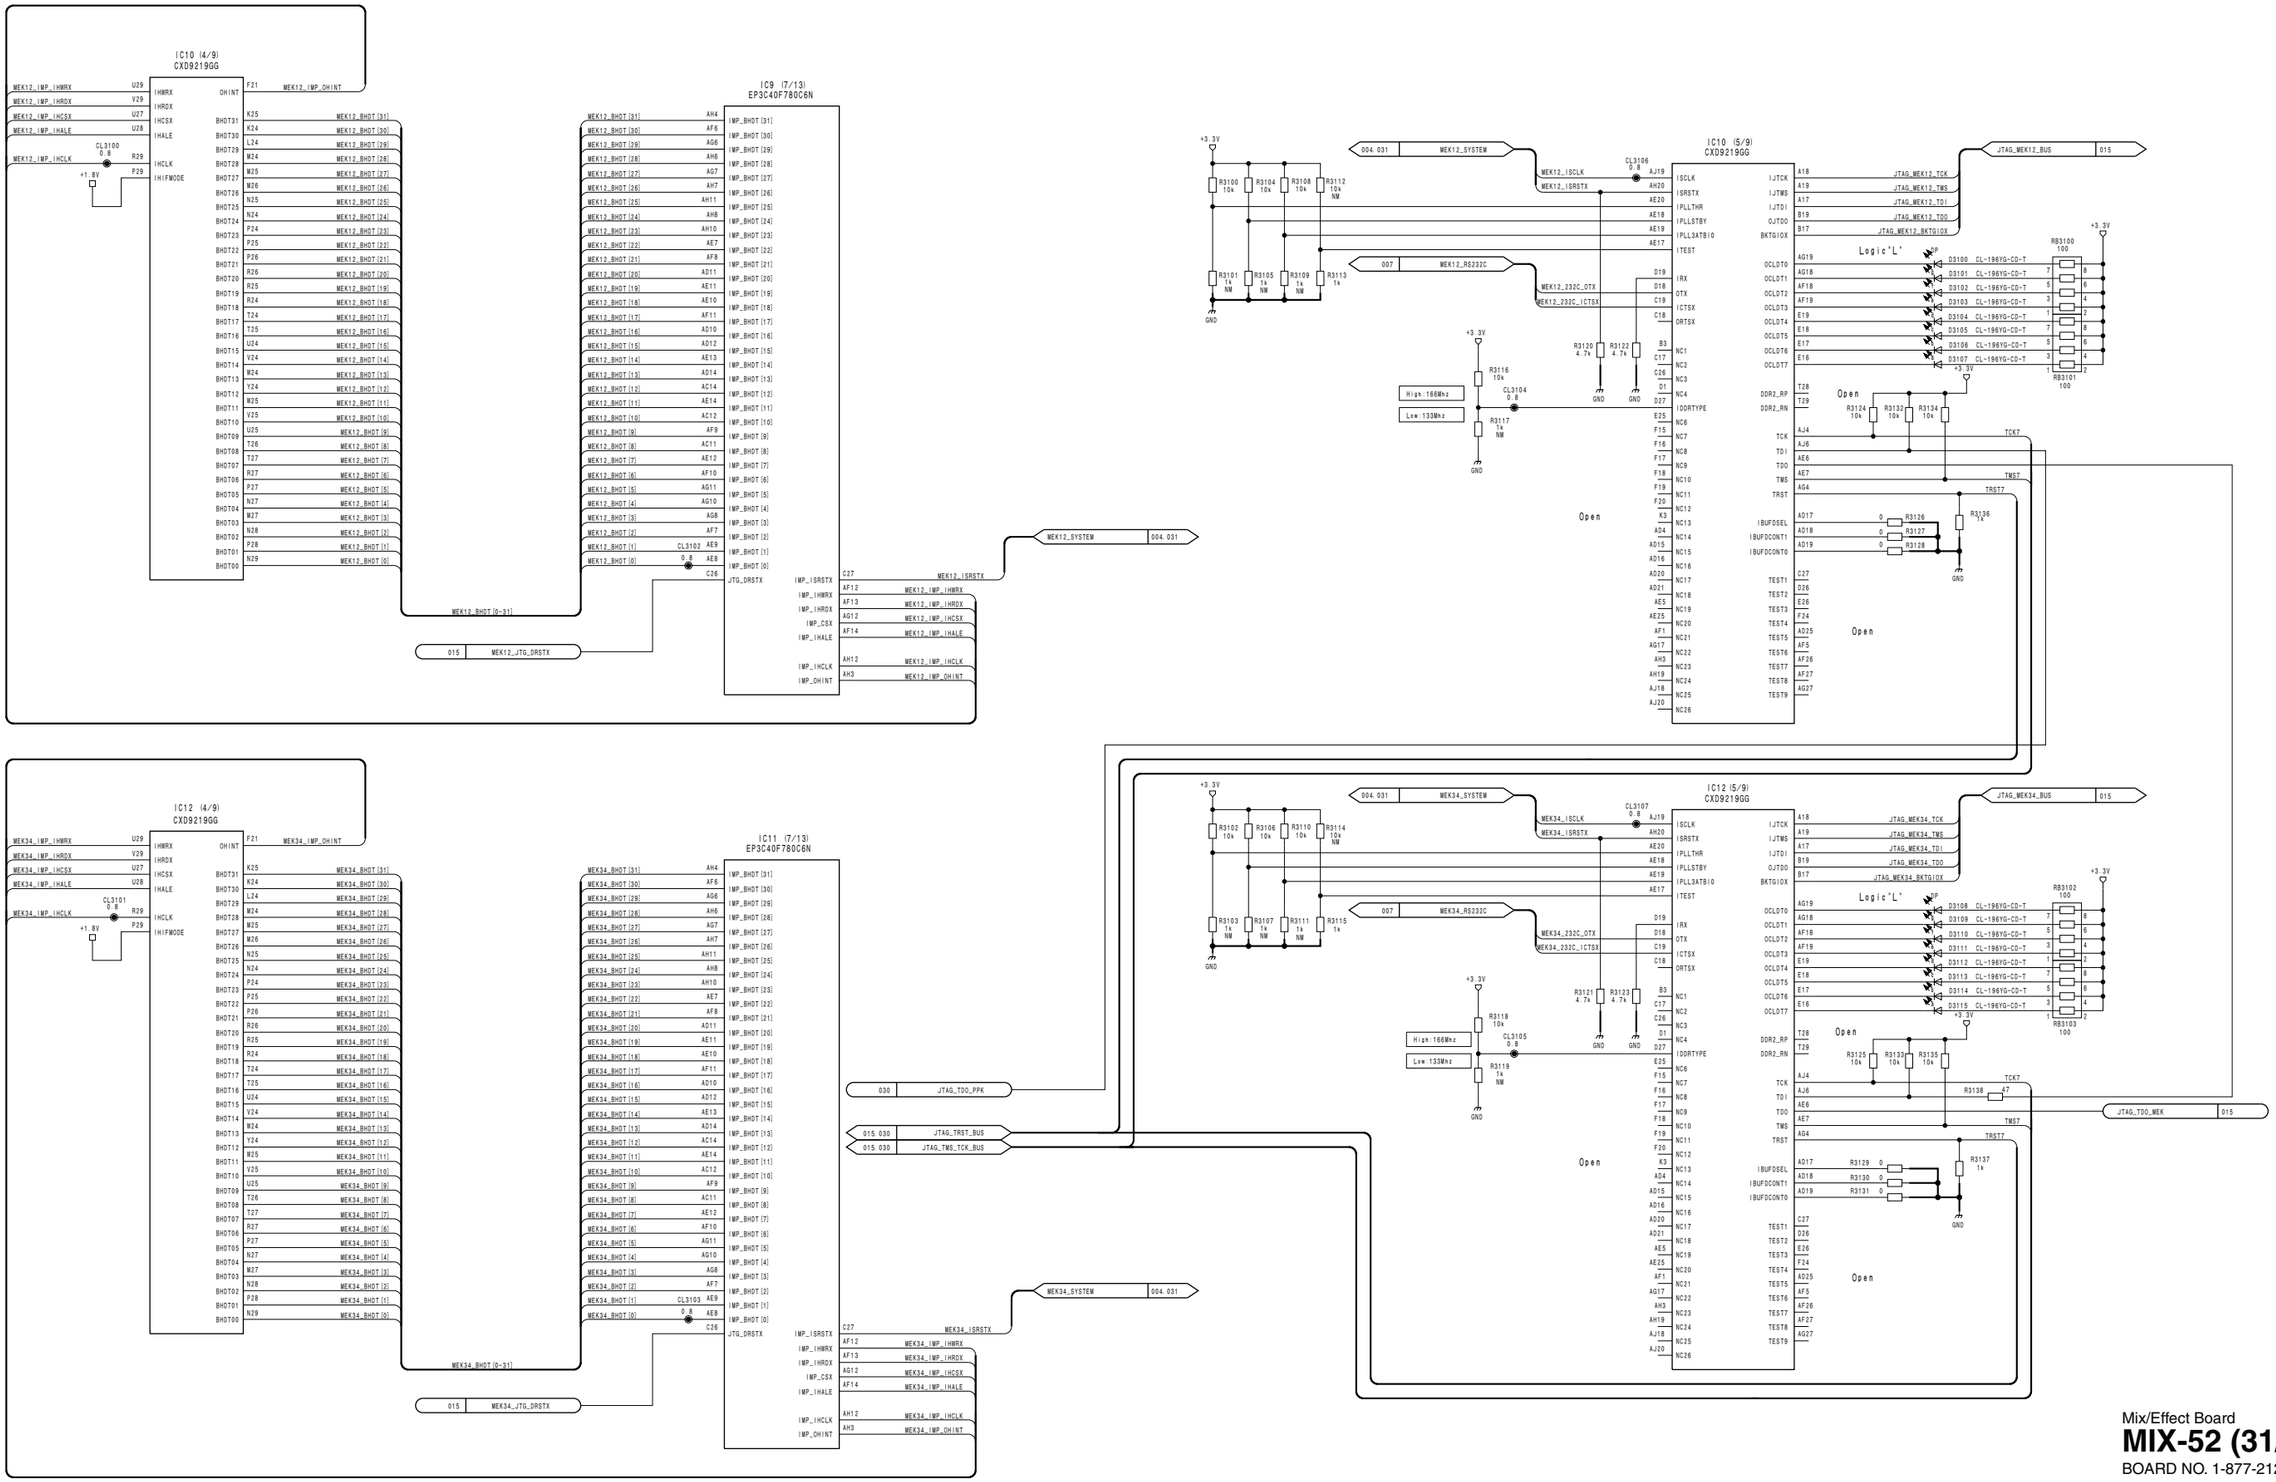



Mix/Effect Board
MIX-52 (31/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_31


MIX-52 (32/40)
SUFFIX: -12

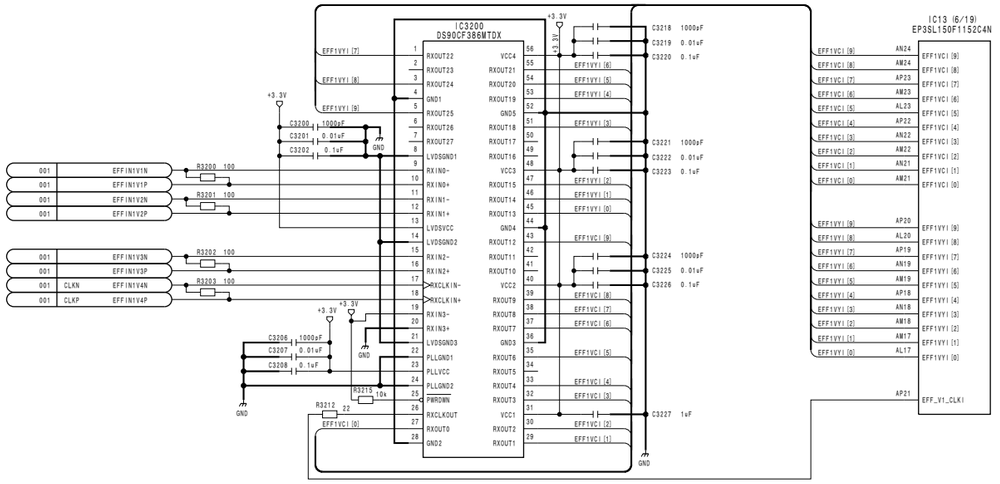


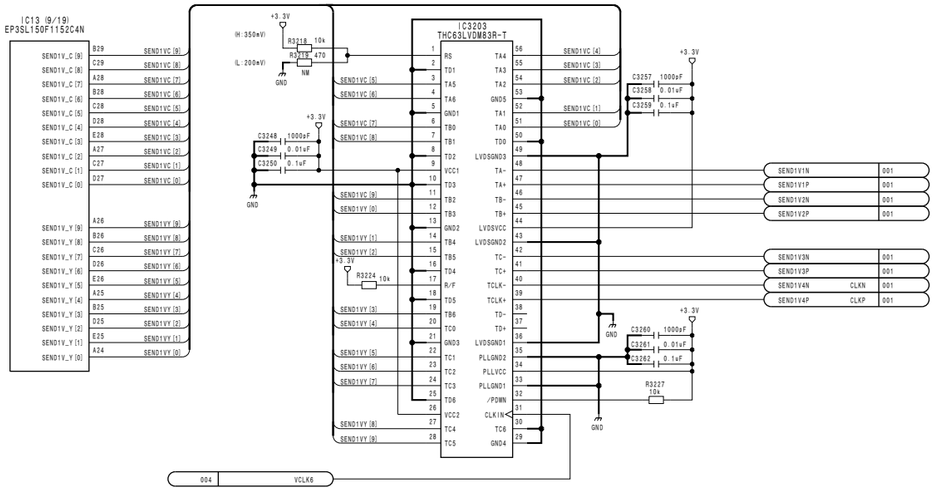

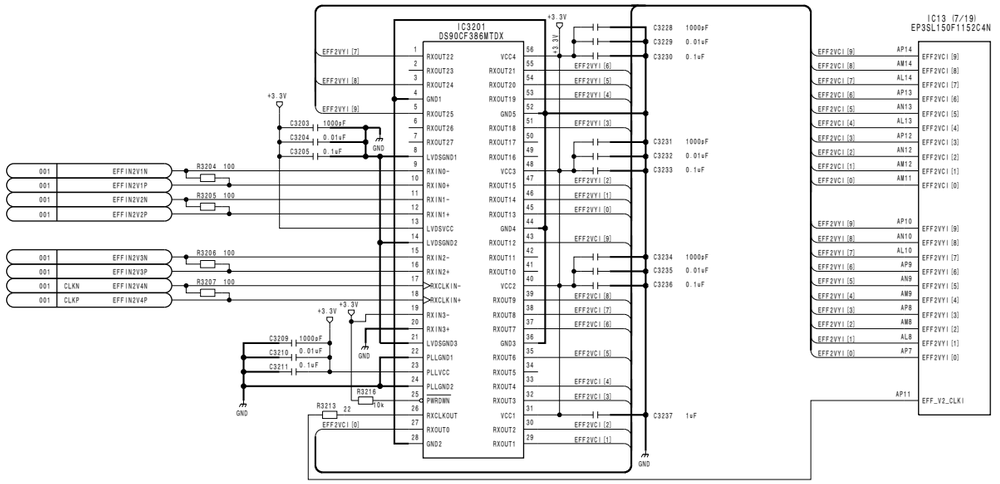

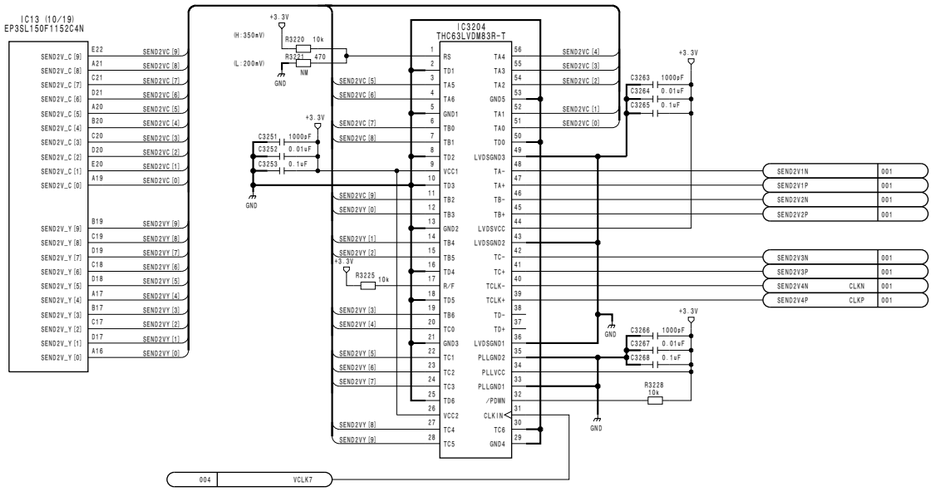

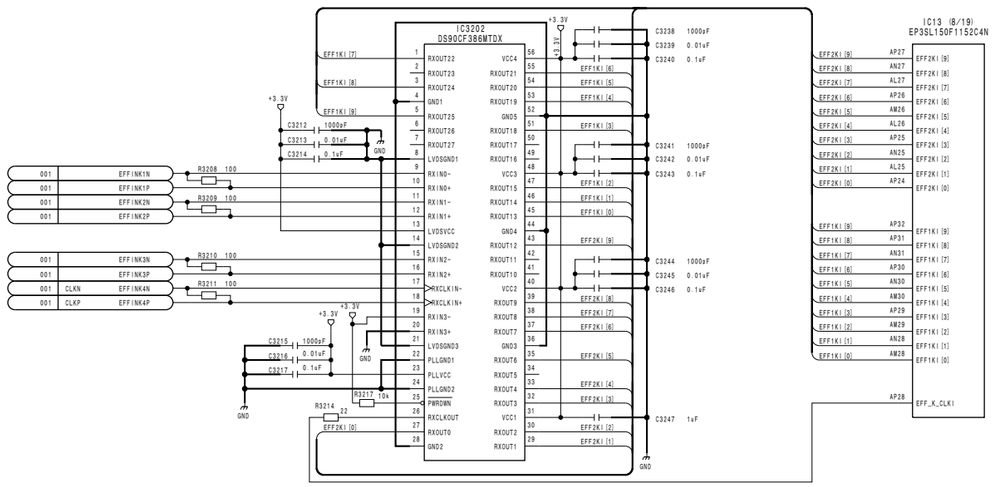


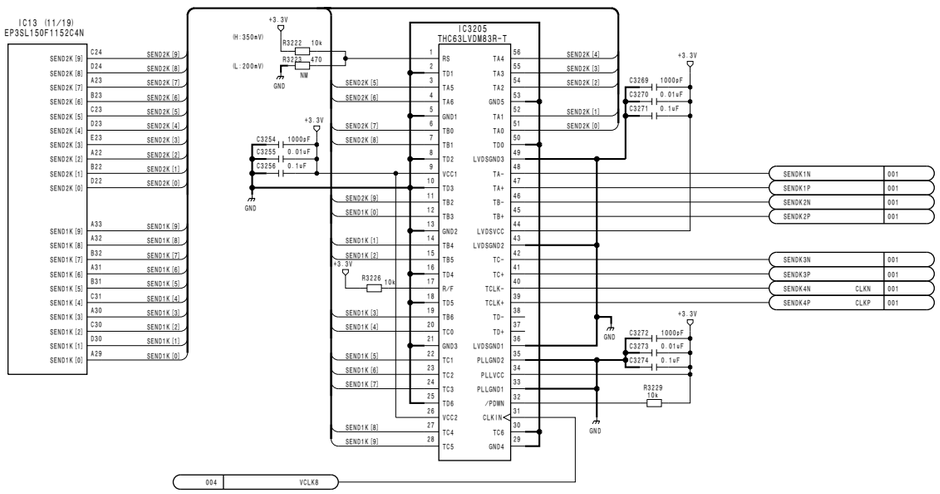



4-184


Mix/Effect Board
MIX-52 (32/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_32


MIX-52 (33/40) **SUFFIX: -12**

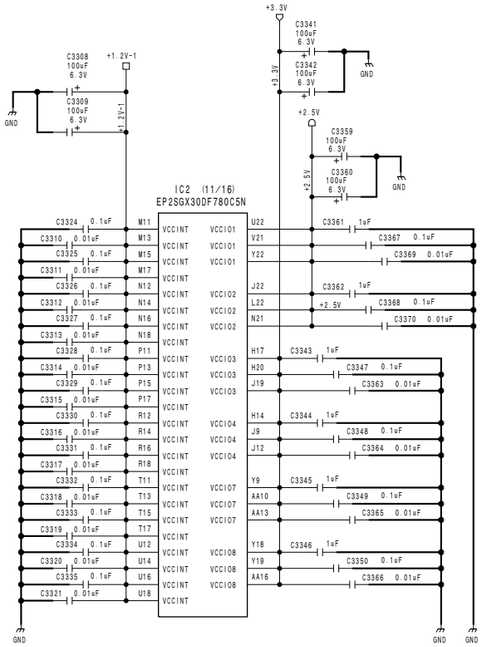


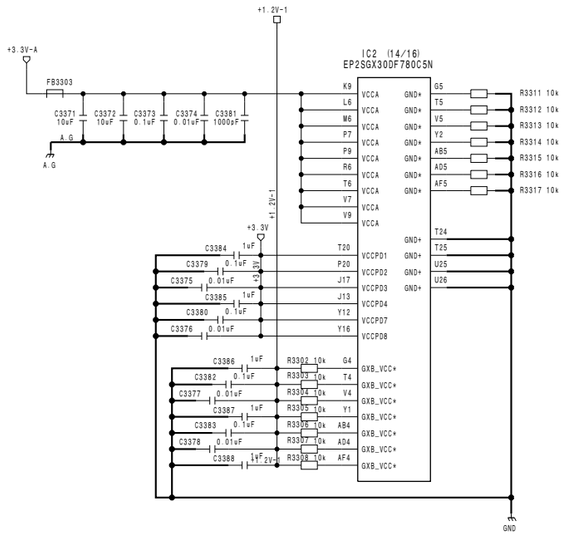





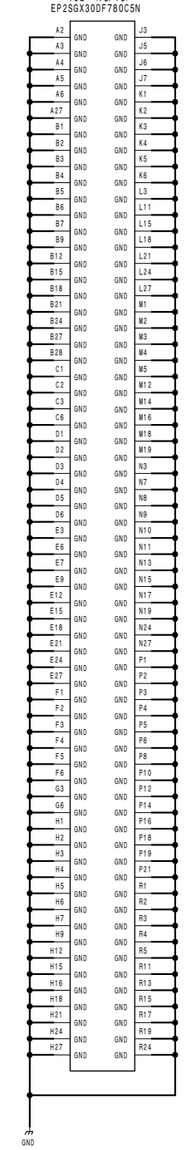

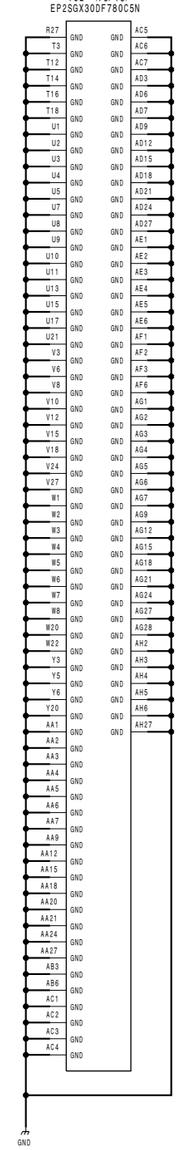

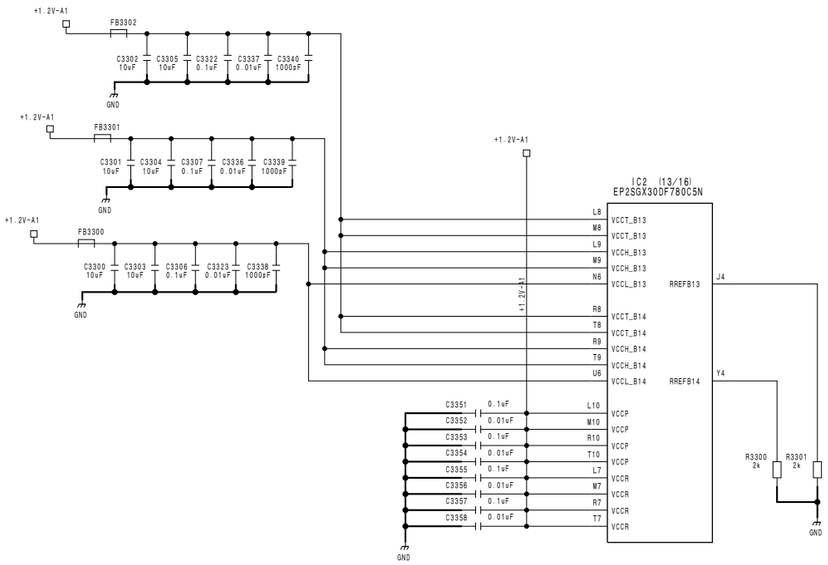


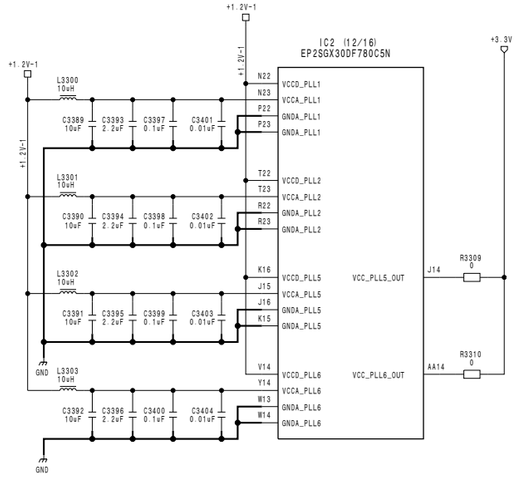






Mix/Effect Board
MIX-52 (33/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_33


MIX-52 (34/40) **SUFFIX: -12**

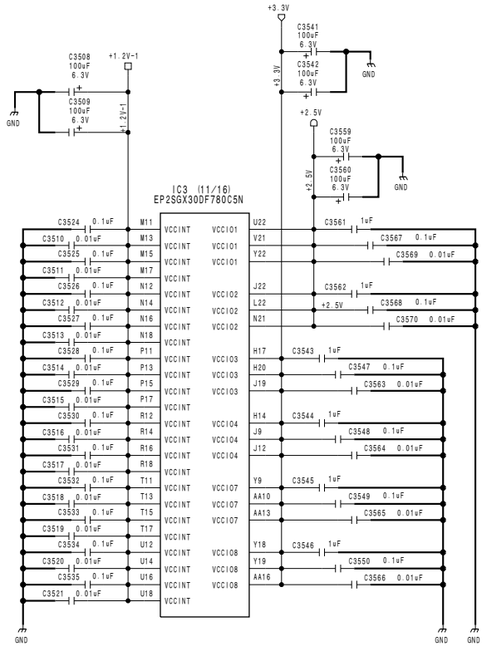


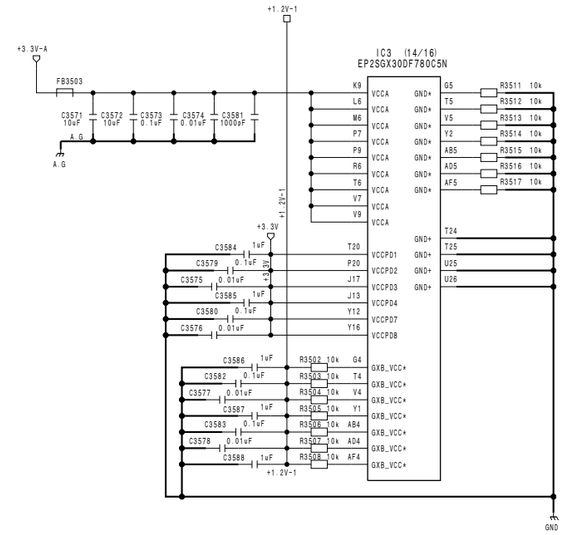




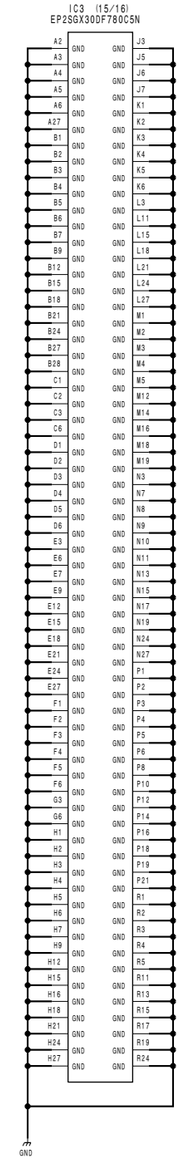

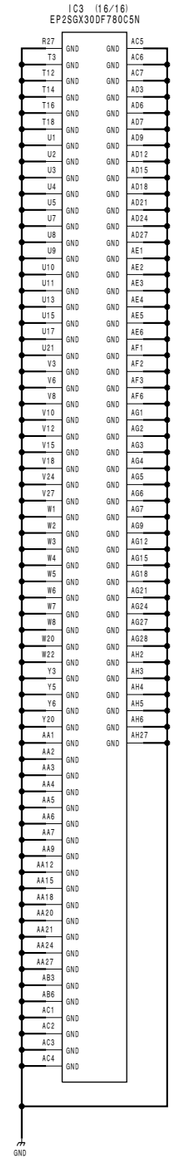


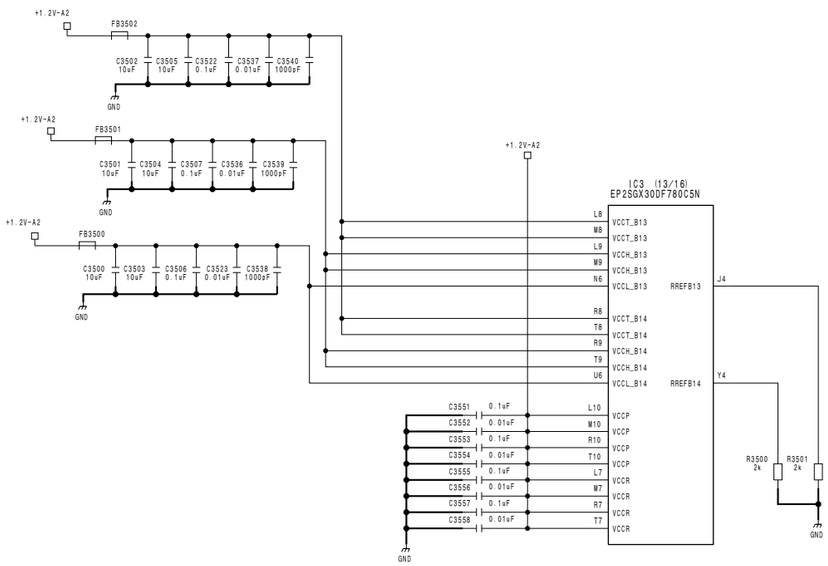


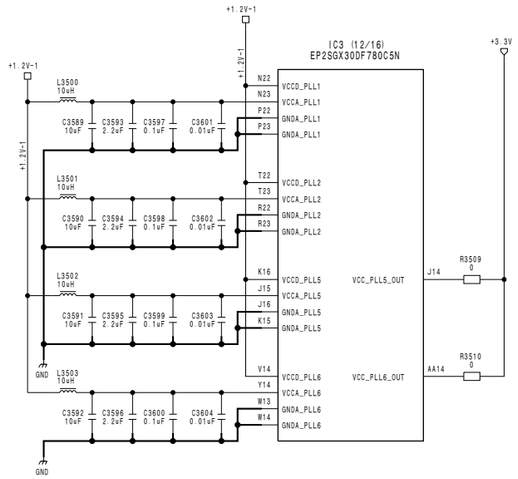



Mix/Effect Board
MIX-52 (34/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_34


MIX-52 (35/40) **SUFFIX: -12**

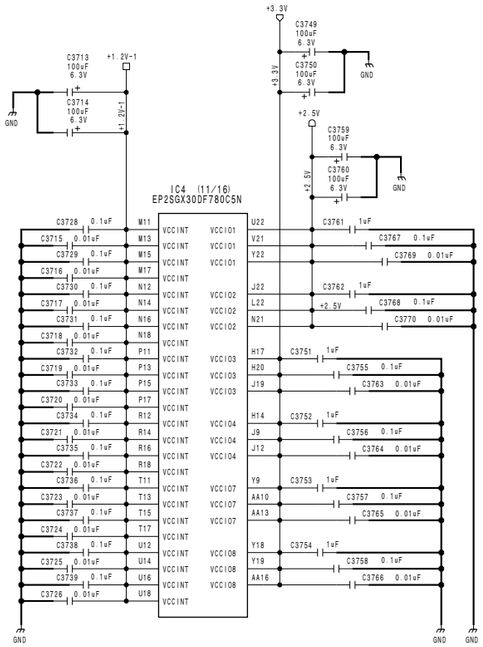


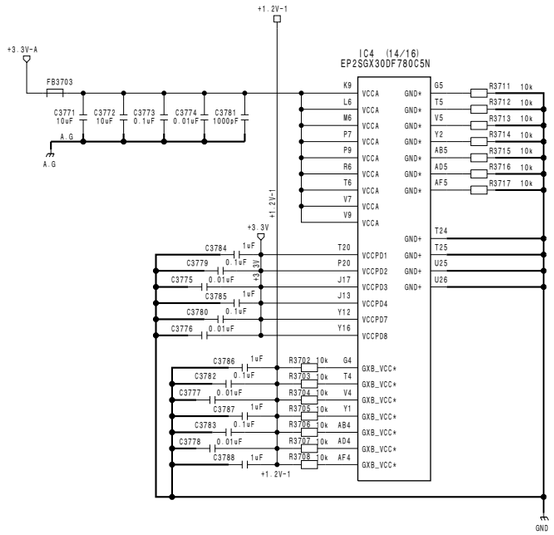









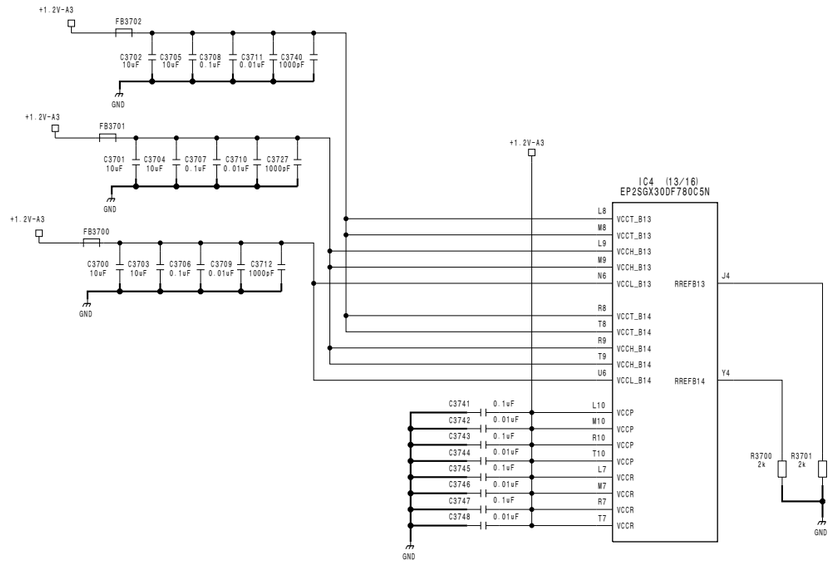


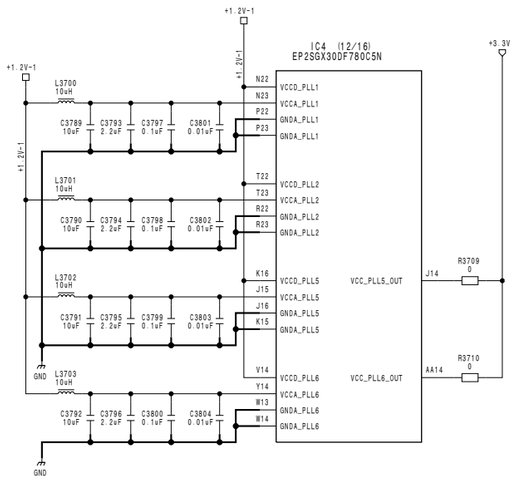


Mix/Effect Board
MIX-52 (35/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_35


4-187

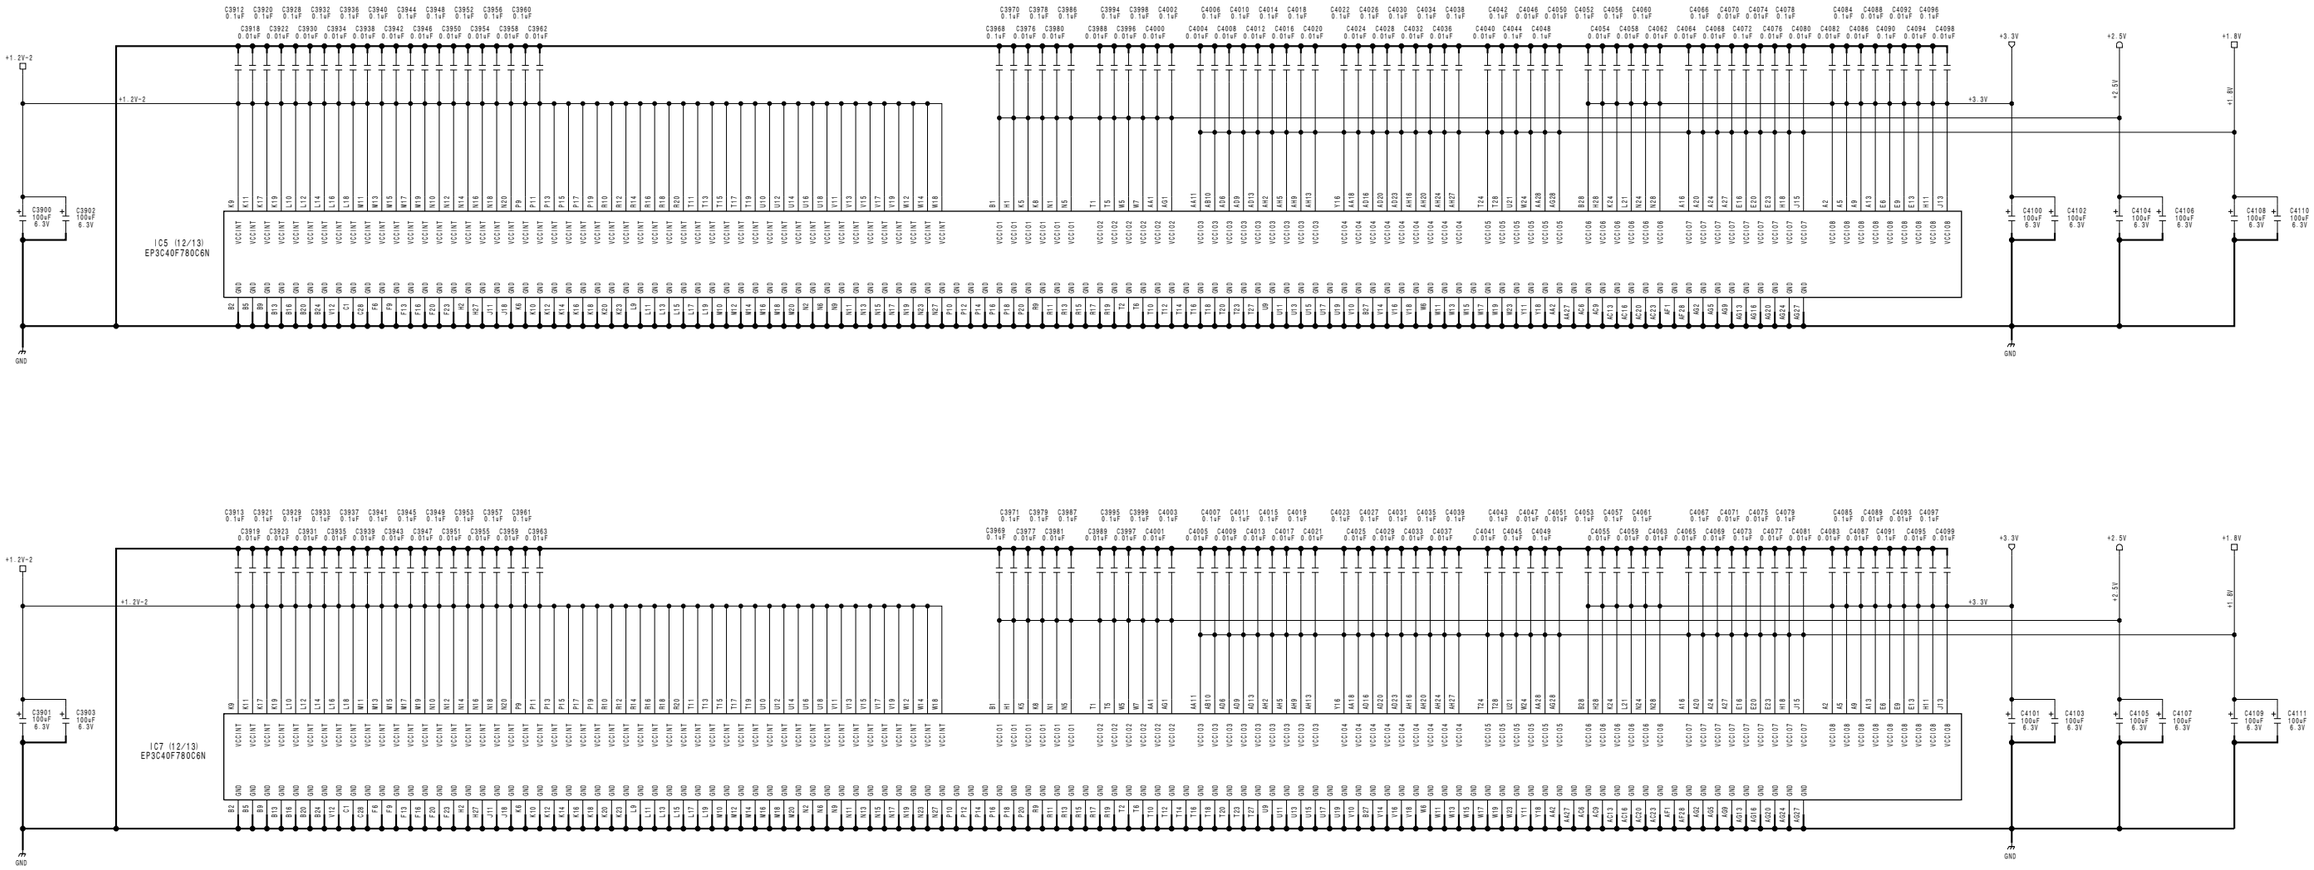


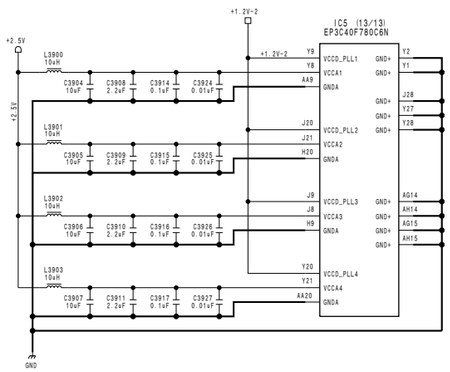


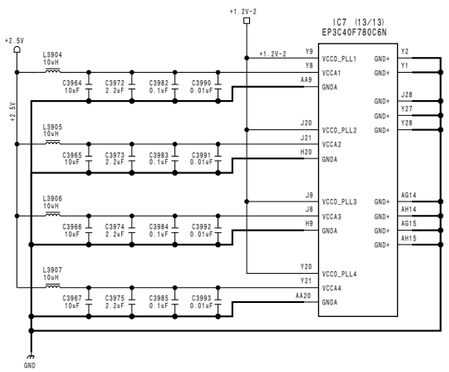

Mix/Effect Board
MIX-52 (36/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_36

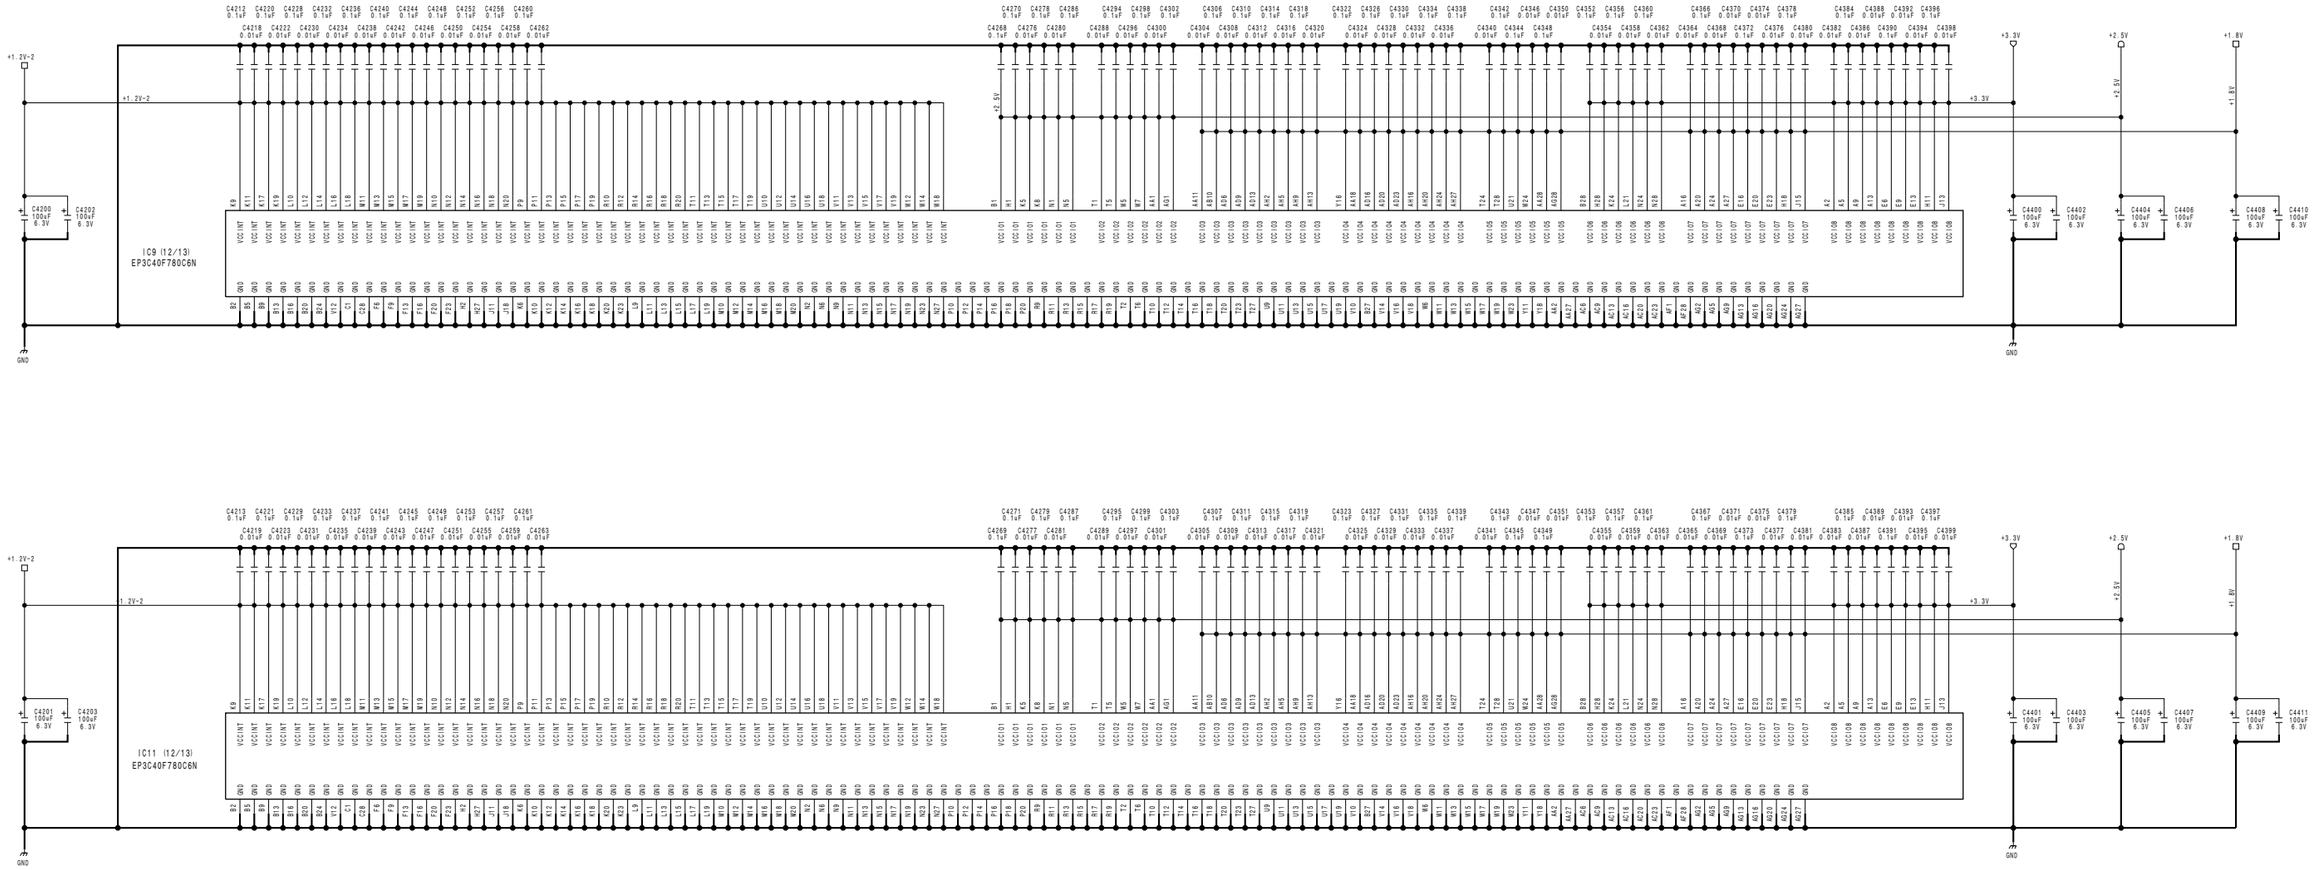

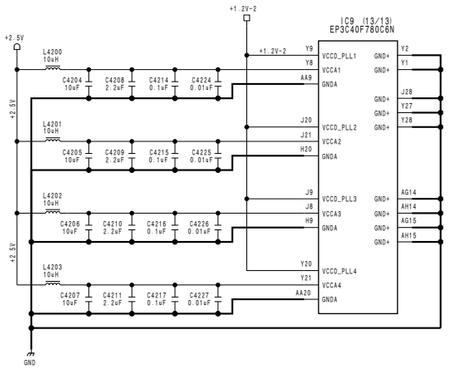

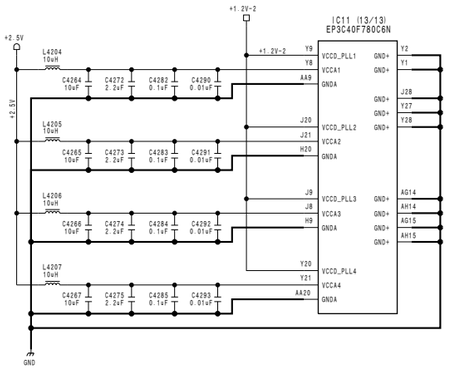

Mix/Effect Board
MIX-52 (37/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_37

MIX-52 (38/40)
SUFFIX: -12


4-190


Mix/Effect Board
MIX-52 (38/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_38


MVS-6000 MM


MIX-52 (39/40)
SUFFIX: -12

MIX-52 (39/40)
SUFFIX: -12

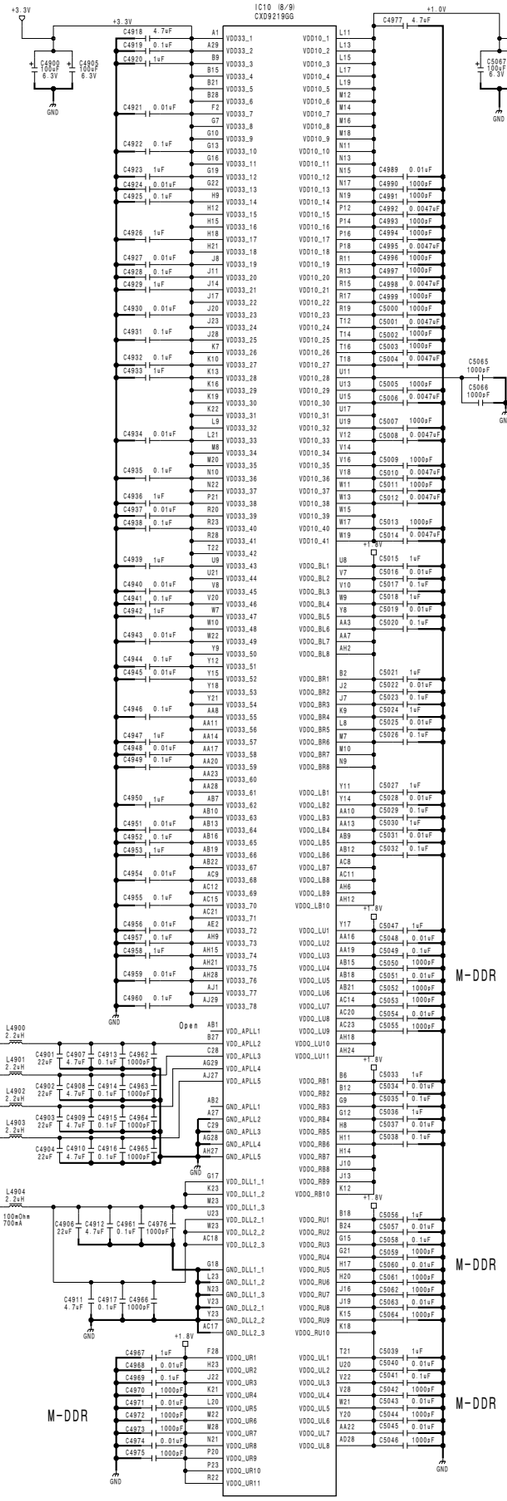

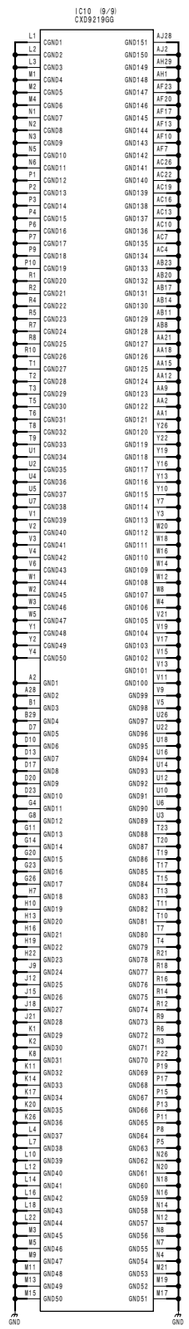


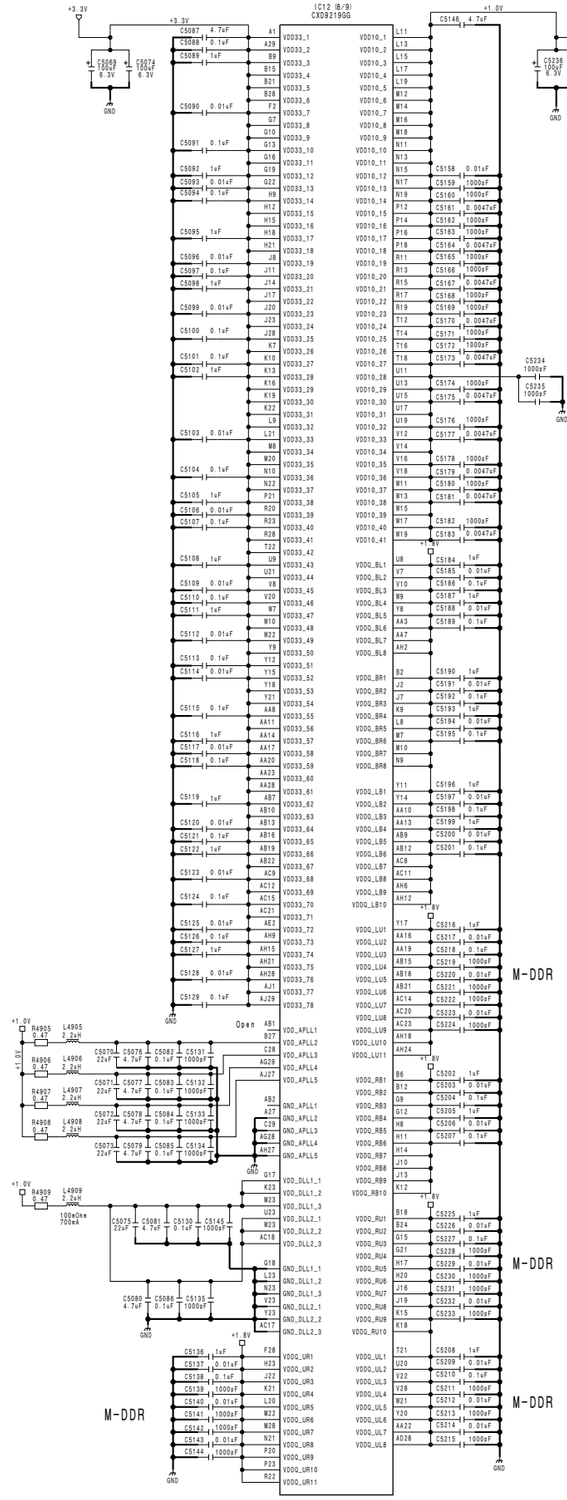


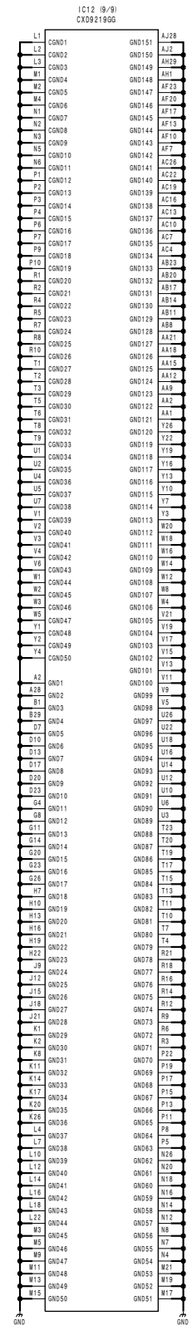



Mix/Effect Board
MIX-52 (39/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_39

MIX-52 (40/40)
SUFFIX: -12

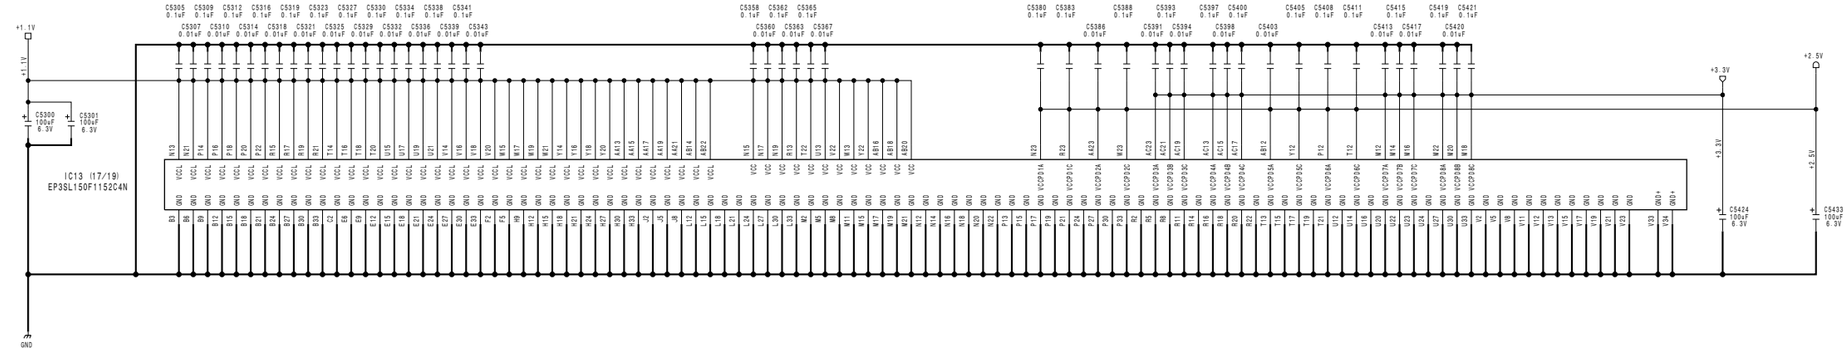

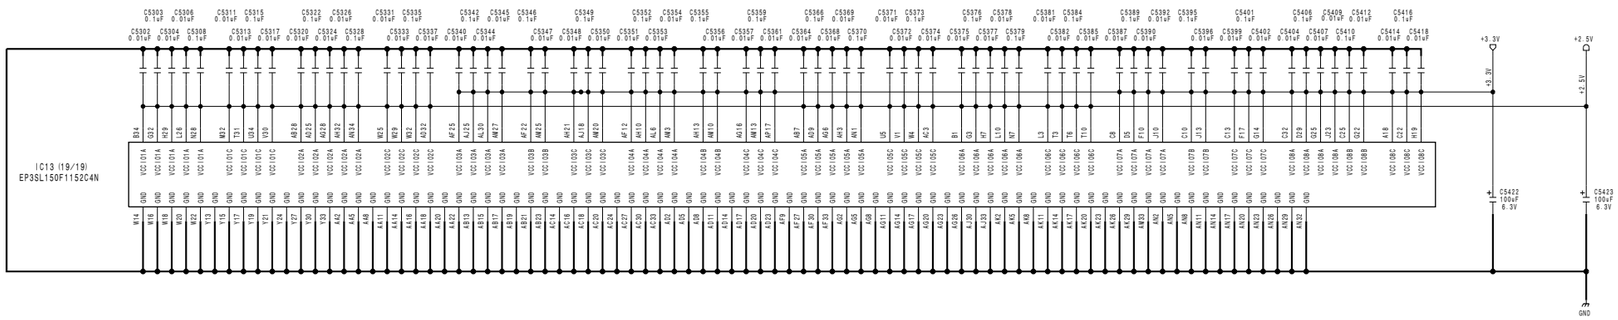

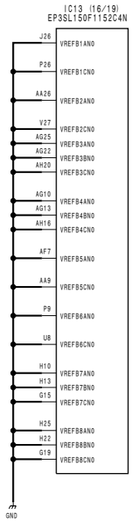

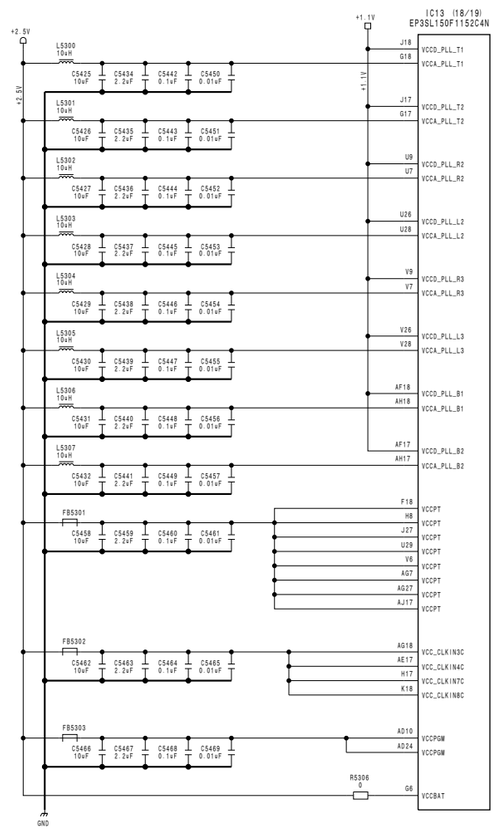

Mix/Effect Board
MIX-52 (40/40)
BOARD NO. 1-877-212-12
MVS-6000_MIX-52_002_40

4-192

MY-114 (1/45)
SUFFIX: -11

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_4L	DC_ENBL	BD_EXT_SL16F	(FORMAT)	FUSE+12V	GND
6	SLOT7	SLOT6	(BD_EXT_SL16R)	SLOT5	SLOT4	GND
7	SLOT3	SLOT2	(Reserve_BD_EXT)	SLOT1	SLOT0	GND
8	INET7MTAP	INET7MTAN	GND	INET7MTBP	INET7MTBN	GND
9	INET_MYTAP	INET_MYTAN	GND	INET_MYTBP	INET_MYTBN	GND
10			GND			GND
11	G_ETH_LINK_LED	G_ETH_ACT_LED	GND			GND
12						
13						
14						
15			GND			GND
16	G_ETH3P	G_ETH3N	GND	G_ETH4P	G_ETH4N	GND
17	G_ETH1P (ETH_TP)	G_ETH1N (ETH_TN)	GND	G_ETH2P (ETH_RP)	G_ETH2N (ETH_RN)	GND
18	G_ETH_100M_LED	G_ETH_1000M_LED	GND	(RESERVE)	(RESERVE)	GND
19	MY_1.8V	MY_1.8V	GND	(RESERVE)	(RESERVE)	GND
20			GND			GND
21			GND			GND
22	GND	GND	GND	GND	GND	GND
23	(RS422TX3P)	(RS422TX3N)	GND	(RS422RX3P)	(RS422RX3N)	GND
24	(RS422TX4P)	(RS422TX4N)	GND	(RS422RX4P)	(RS422RX4N)	GND
25			GND			GND

CNY1

	a	b	c	d	e	FG
1	CCROUT1VAP	CCROUT1VAN	GND	CCRIN1VP	CCRIN1VN	GND
2	CCROUT1VBP	CCROUT1VBN	GND			GND
3	CCROUT2VAP	CCROUT2VAN	GND	CCRIN2VP	CCRIN2VN	GND
4	CCROUT2VBP	CCROUT2VBN	GND			GND
5			GND	MYIN1VP	MYIN1VN	GND
6			GND			GND
7	MYOUT1VAP	MYOUT1VAN	GND	MYIN2VP	MYIN2VN	GND
8	MYOUT1VBP	MYOUT1VBN	GND			GND
9	MYOUT2VAP	MYOUT2VAN	GND	RE_MYIN9VP	RE_MYIN9VN	GND
10	MYOUT2VBP	MYOUT2VBN	GND			GND
11	MYOUT3VAP	MYOUT3VAN	GND	RE_MYIN10VP	RE_MYIN10VN	GND
12	MYOUT3VBP	MYOUT3VBN	GND			GND
13	MYOUT4VAP	MYOUT4VAN	GND	RE_MYIN7VP	RE_MYIN7VN	GND
14	MYOUT4VBP	MYOUT4VBN	GND			GND
15	MYOUT5VAP	MYOUT5VAN	GND	RE_MYIN8VP	RE_MYIN8VN	GND
16	MYOUT5VBP	MYOUT5VBN	GND			GND
17	MYOUT6VAP	MYOUT6VAN	GND	RE_MYIN5VP	RE_MYIN5VN	GND
18	MYOUT6VBP	MYOUT6VBN	GND			GND
19	MYOUT7VAP	MYOUT7VAN	GND	RE_MYIN6VP	RE_MYIN6VN	GND
20	MYOUT7VBP	MYOUT7VBN	GND			GND
21	MYOUT8VAP	MYOUT8VAN	GND	RE_MYIN3VP	RE_MYIN3VN	GND
22	MYOUT8VBP	MYOUT8VBN	GND			GND


CNZ1

	a	b	c	d	e	FG
1			GND	RE_MYIN4VP	RE_MYIN4VN	GND
2			GND			GND
3	PBUSMY01	PBUSMY02	GND	PBUSMY03	PBUSMY04	GND
4	PBUSMY05	PBUSMY06	GND	PBUSMY07	PBUSMY08	GND
5	PBUSMY09	PBUSMY10	GND	PBUSMY11	PBUSMY12	GND
6	PBUSMY13	PBUSMY14	GND	PBUSMY15	PBUSMY16	GND
7	PBUSMY17	PBUSMY18	GND	PBUSMY19	PBUSMY20	GND
8	PBUSMY21	PBUSMY22	GND	PBUSMY23	PBUSMY24	GND
9	PBUSMY25	PBUSMY26	GND	PBUSMY27	PBUSMY28	GND
10	PBUSMY29	PBUSMY30	GND	PBUSMY31	PBUSMY32	GND
11	PBUSMY33	PBUSMY34	GND	PBUSMY35	PBUSMY36	GND
12						GND
13						GND
14						GND
15	PBUSMY37	PBUSMY38	GND	PBUSMY39	PBUSMY40	GND
16	PBUSMY41	PBUSMY42	GND	PBUSMY43	PBUSMY44	GND
17	PBUSMY45	PBUSMY46	GND	PBUSMY47	PBUSMY48	GND
18	PBUSMY49	PBUSMY50	GND	PBUSMY51	PBUSMY52	GND
19	PBUSMY53	PBUSMY54	GND	PBUSMY55	PBUSMY56	GND
20	PBUSMY57	PBUSMY58	GND	PBUSMY59	PBUSMY60	GND
21	PBUSMY61	PBUSMY62	GND	PBUSMY63	PBUSMY64	GND
22	PBUSMY65	PBUSMY66	GND	(PBUSMY67)	(PBUSMY68)	GND
23	(PBUSMY69)	(PBUSMY70)	GND	HFCK3P	HFCK3N	GND
24	HD3P	HD3N	GND	CKX3P	CKX3N	GND
25	FLOE3P	FLOE3N	GND	VD3P	VD3N	GND

Frame Memory Board
MY-114 (1/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_1


4-193

MY-114 (2/45)
SUFFIX: -11

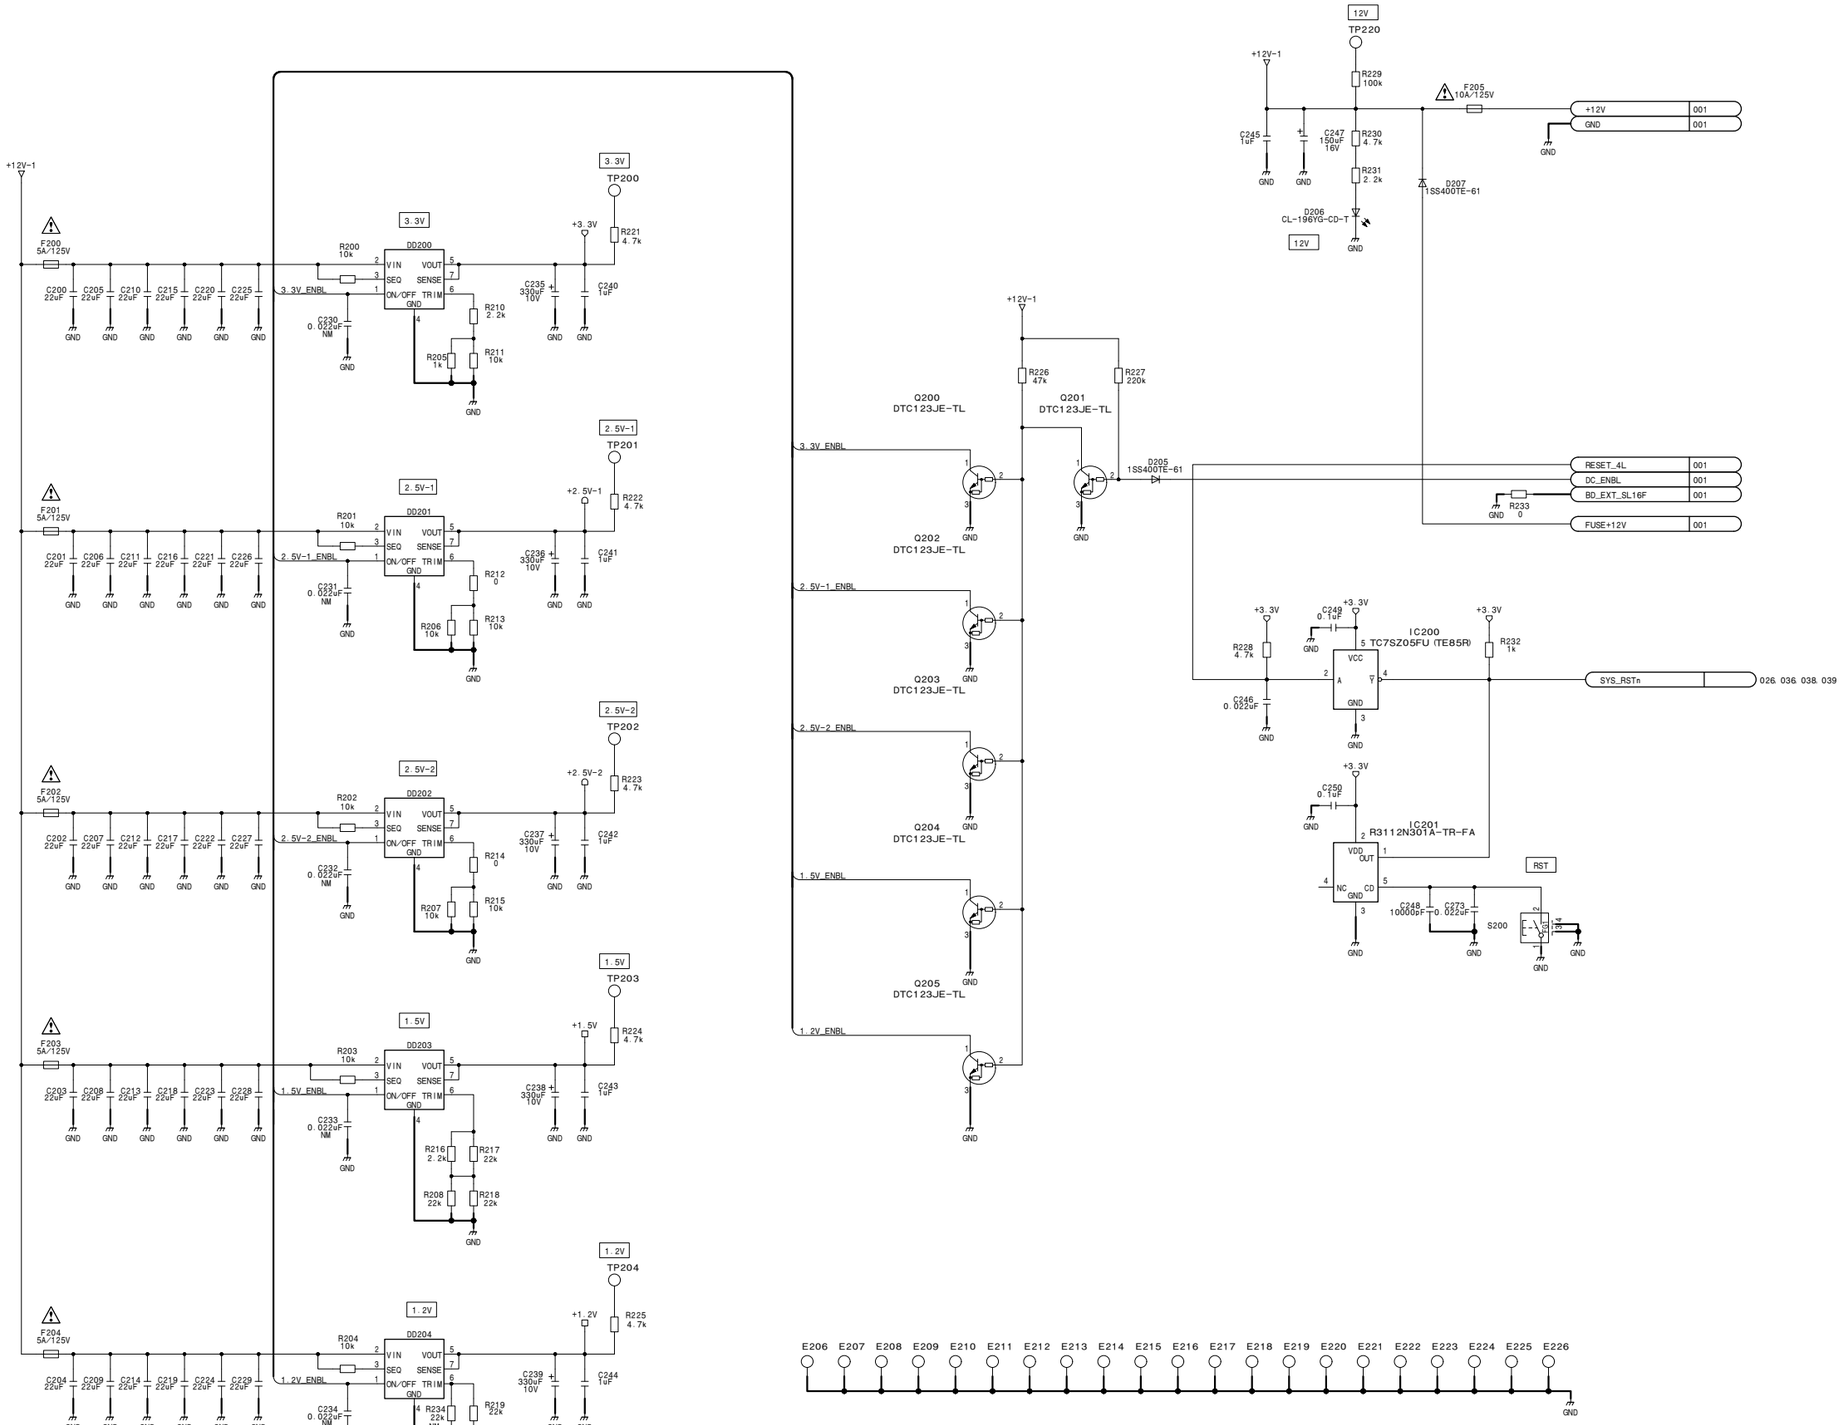


Frame Memory Board
MY-114 (2/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_2

MY-114 (3/45)
SUFFIX: -11

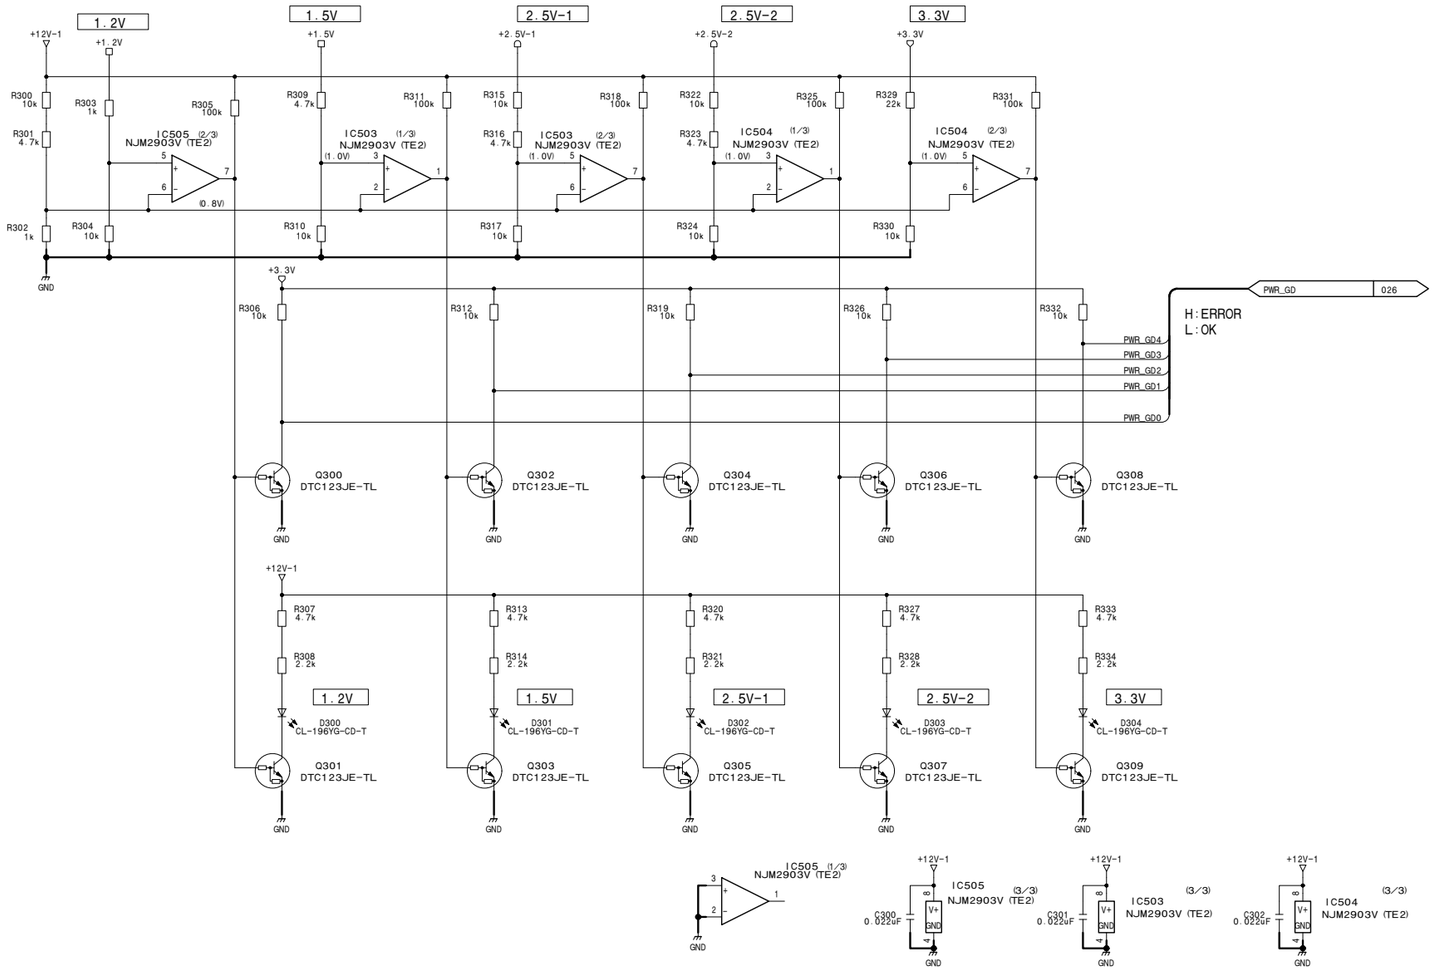

Frame Memory Board
MY-114 (3/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_3

MY-114 (4/45)
SUFFIX: -11

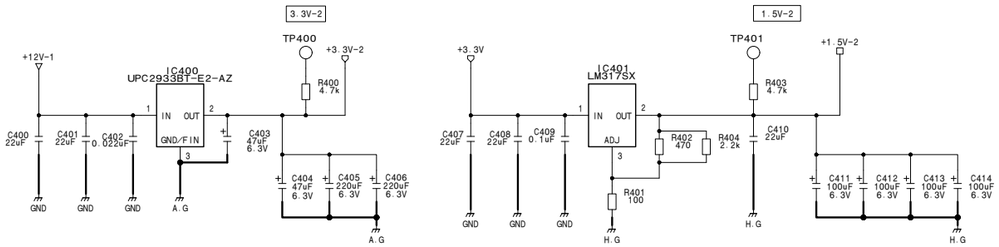

Frame Memory Board


MY-114 (4/45)


BOARD NO. 1-871-701-11


MVS-8000G_MY-114_002_4

4-196

MY-114 (5/45)
SUFFIX: -11

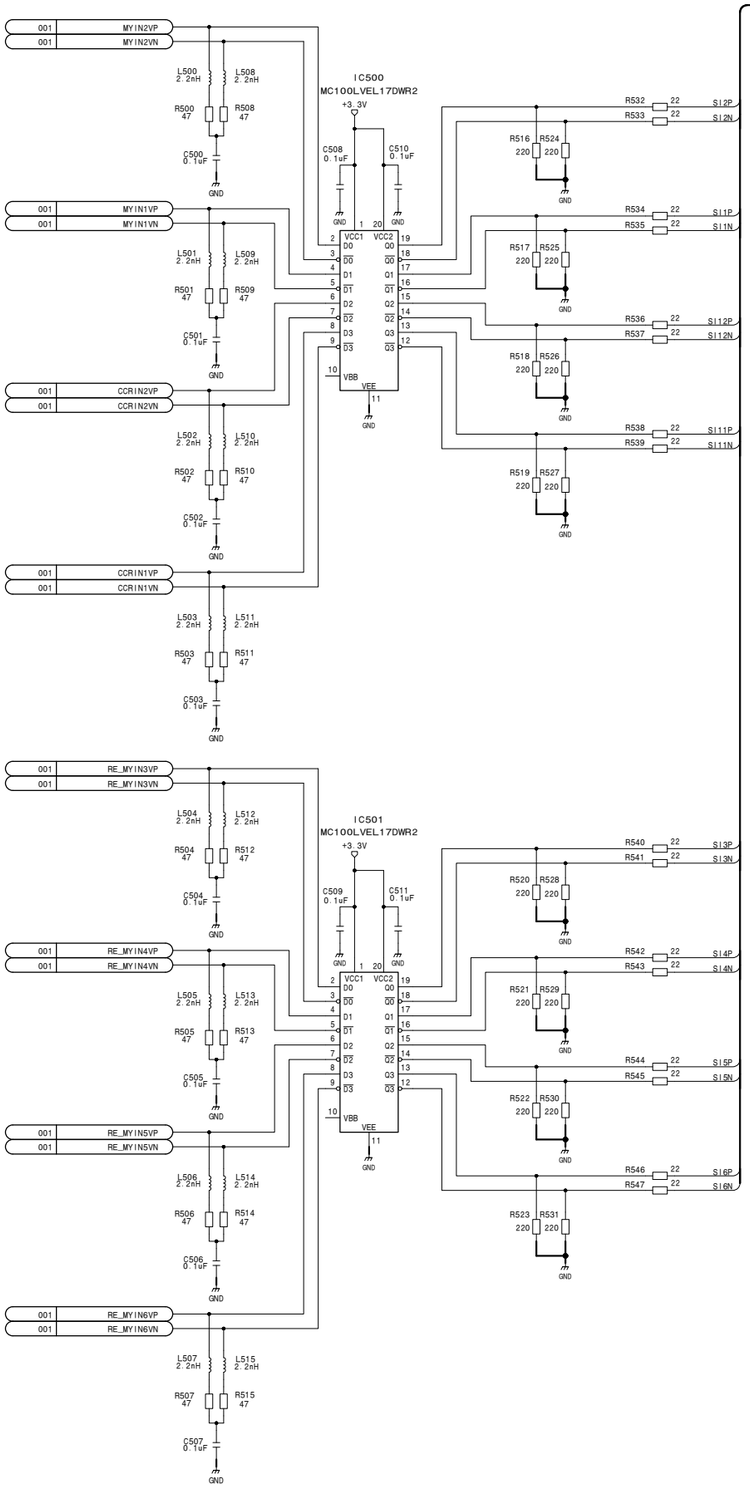


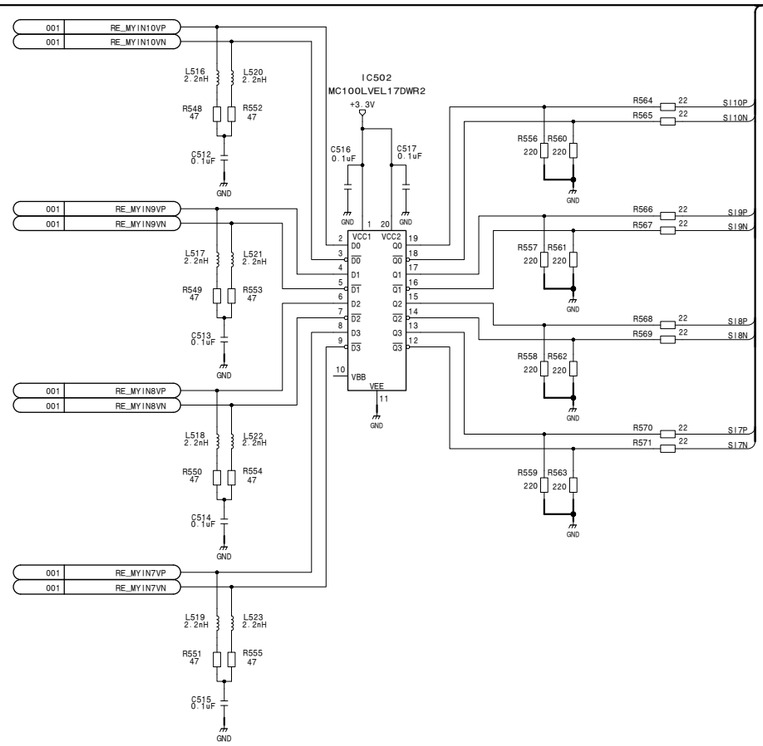


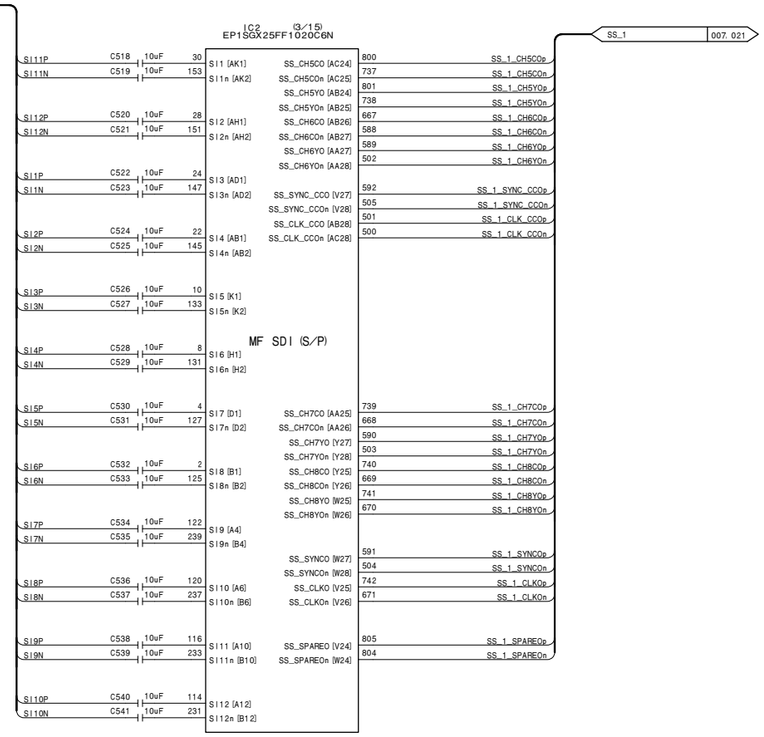


Frame Memory Board
MY-114 (5/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_5

MY-114 (6/45)
SUFFIX: -11

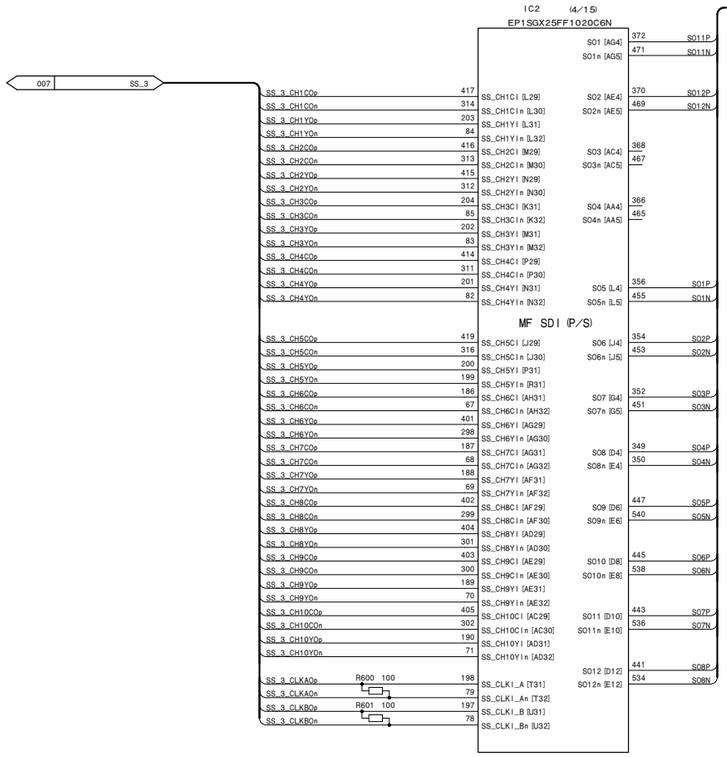


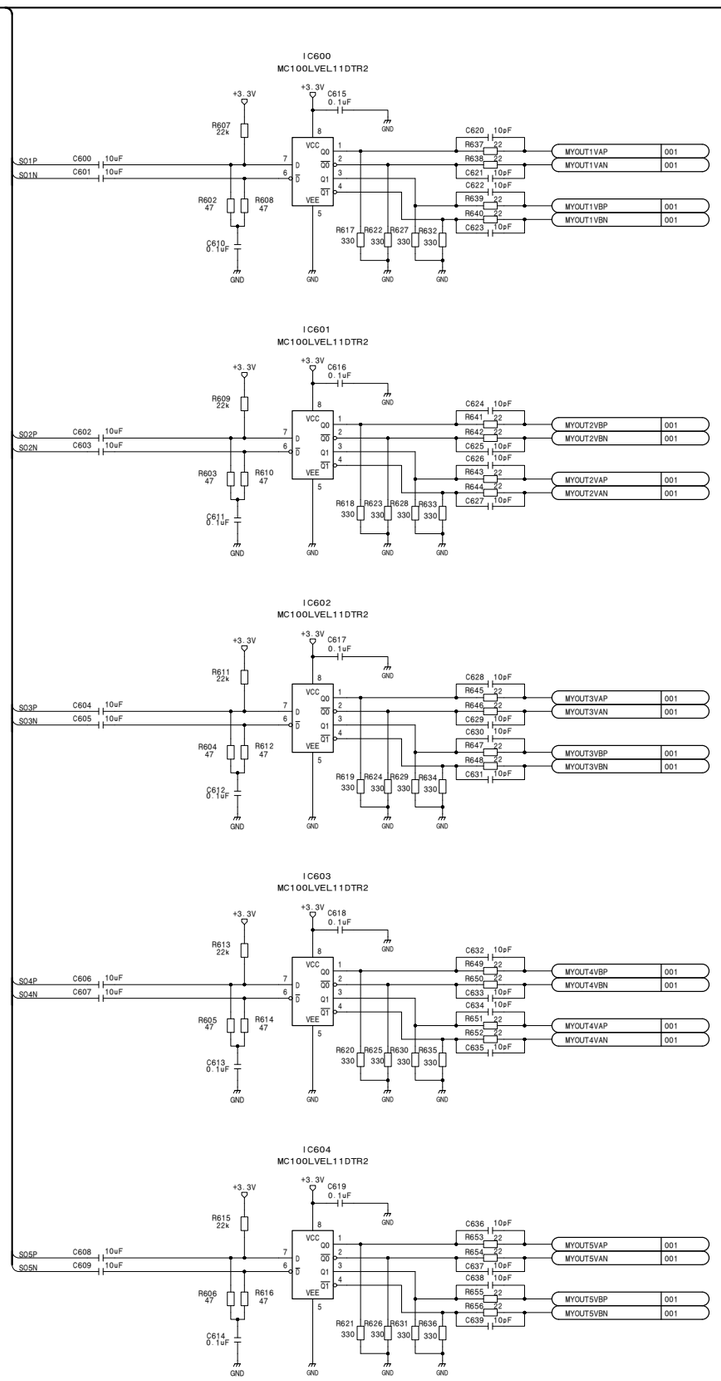

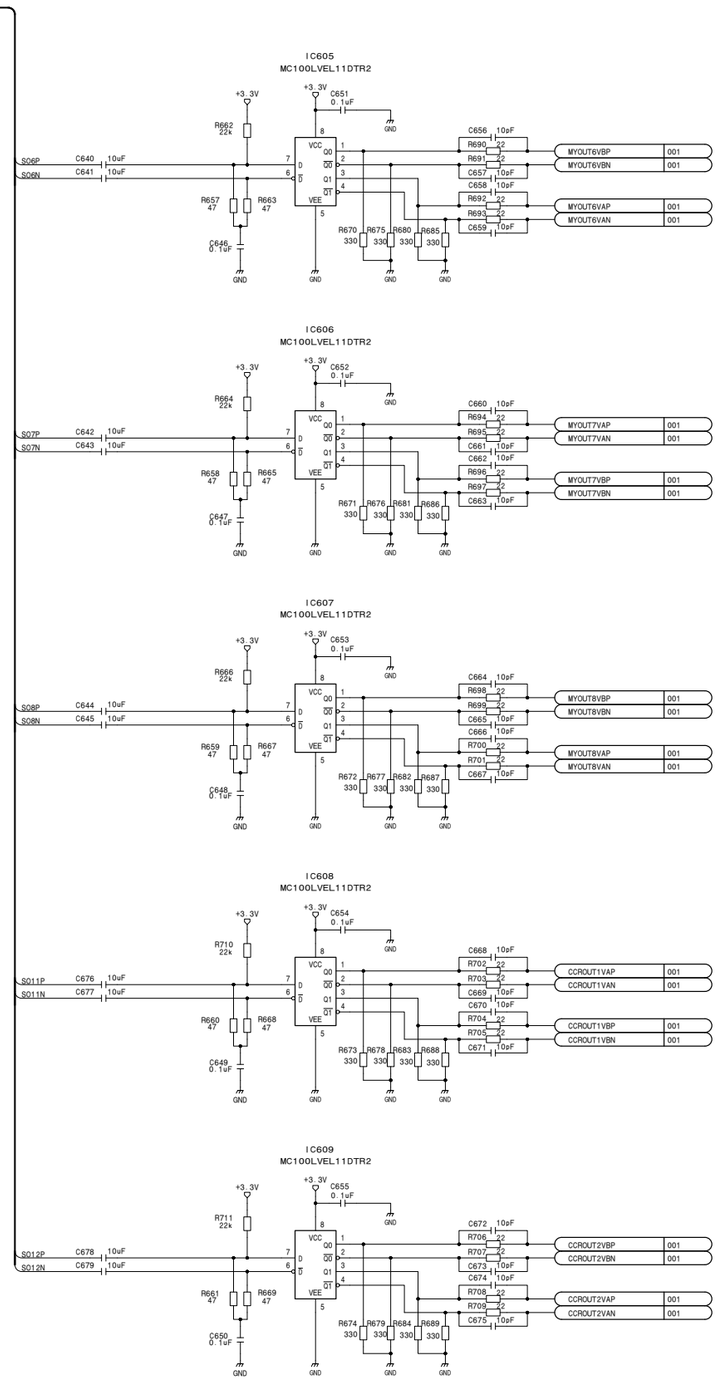

Frame Memory Board
MY-114 (6/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_6

MY-114 (7/45)
SUFFIX: -11

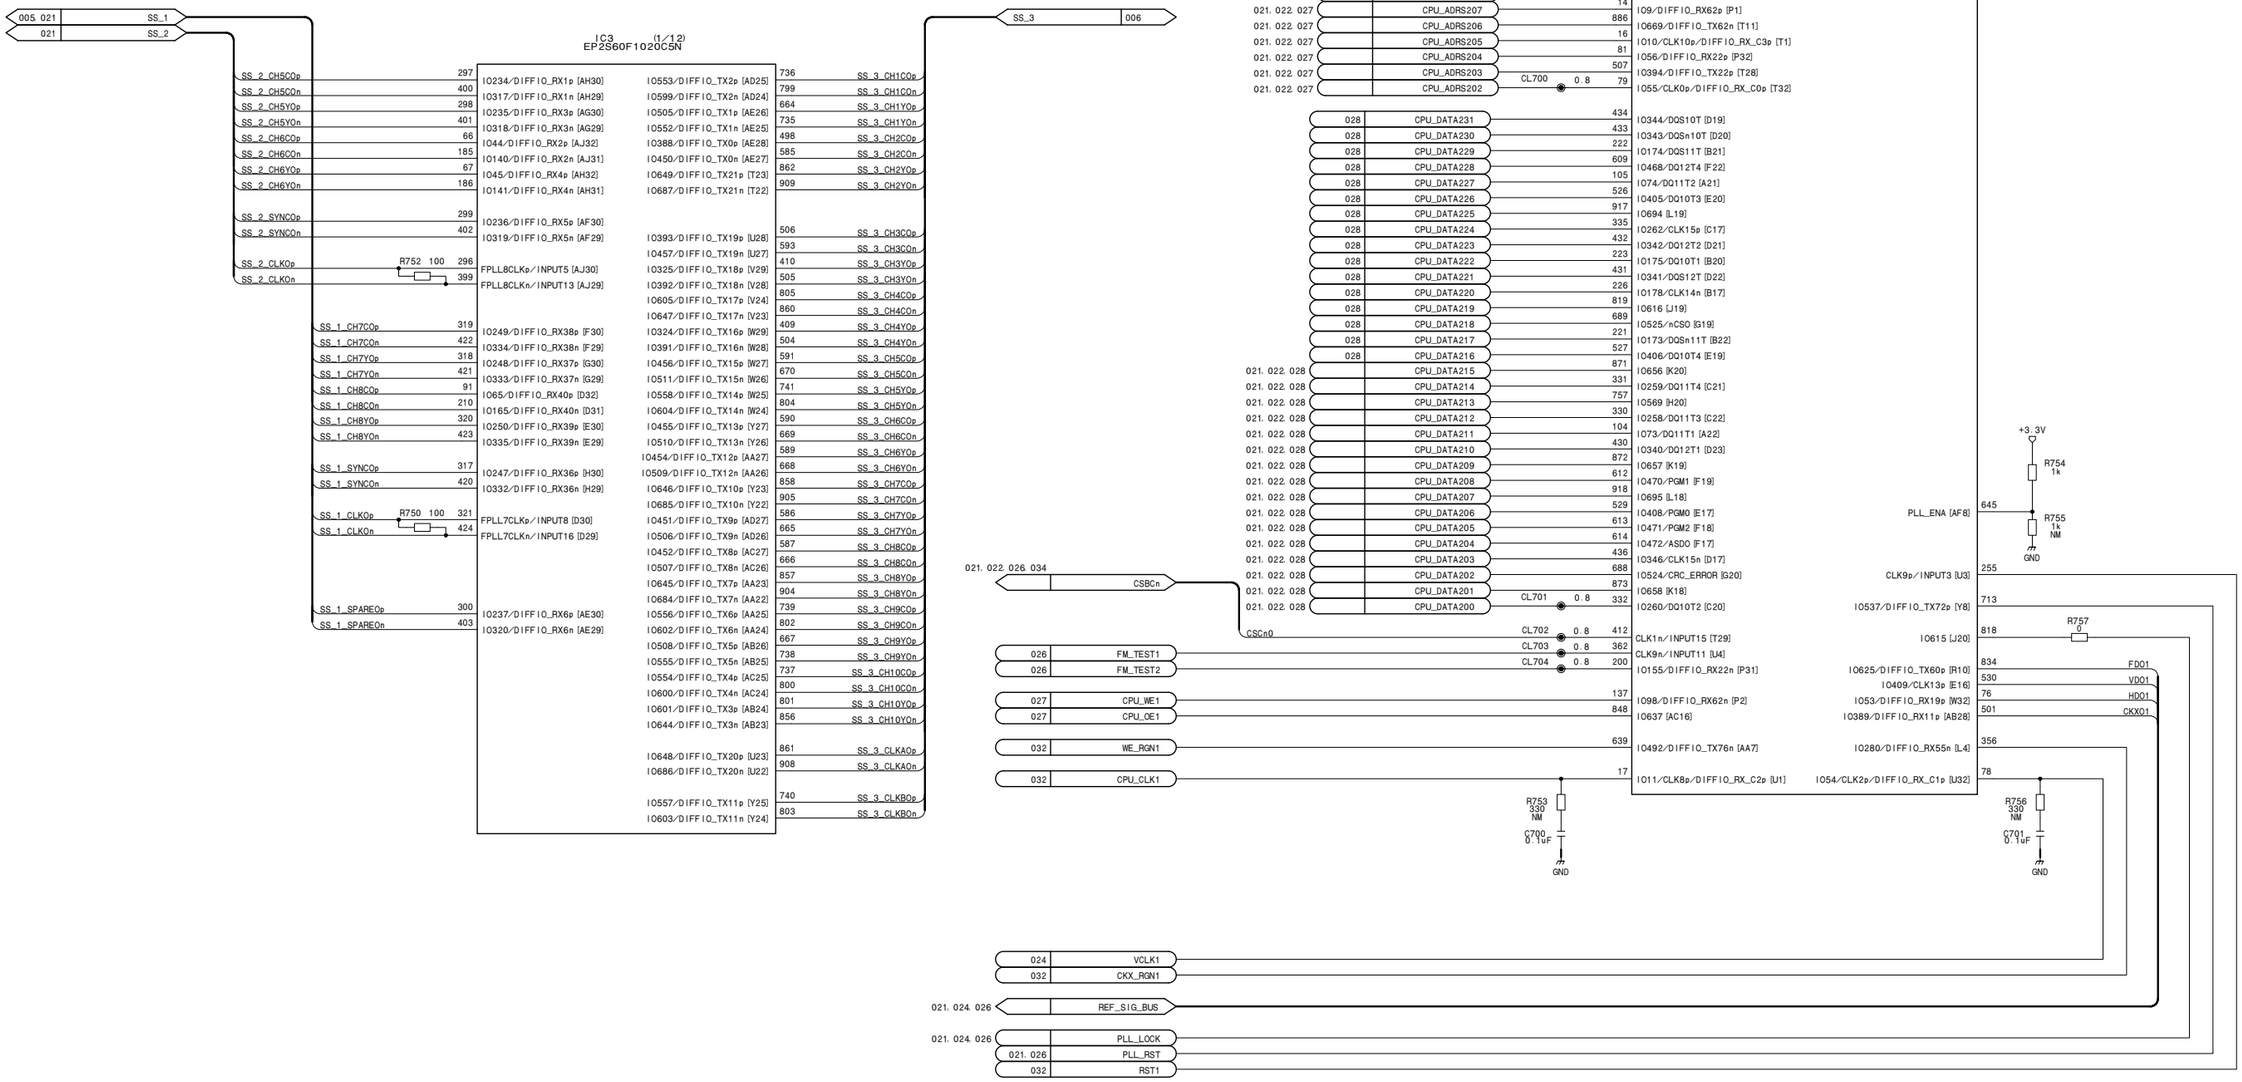

Frame Memory Board
MY-114 (7/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_7

MY-114 (8/45)
SUFFIX: -11

C_SDR_CTRL 010, 013, 014, 015, 016
C_CLK_BUS 012
C_SDR_DATA 013, 014, 015, 016

IC3 (5/12)
EP2S60F1020C5N

	I081/DQ5T1 [A10]	116	C_ADRS_OUT14
	I083/DQ3T2 [A8]	118	C_ADRS_OUT13
	I0650/DIFFIO_TX25p [R23]	863	C_ADRS_OUT12
	I0185/DQ5T2 [B10]	233	C_ADRS_OUT11
	I0480/DQS4T [F9]	622	C_ADRS_OUT10
	I0199/DIFFIO_RX59n [N3]	251	C_ADRS_OUT9
	I0181/DQ9T2 [B14]	229	C_ADRS_OUT8
	I0270/DQ3T4 [C8]	344	C_ADRS_OUT7
	I0700 [L13]	923	C_ADRS_OUT6
	I0268/DQS5T [C10]	342	C_ADRS_OUT5
	I0269/DQ3T3 [C9]	343	C_ADRS_OUT4
	I0353/DQ5T4 [D10]	443	C_ADRS_OUT3
	I097/DIFFIO_RX59p [N2]	136	C_ADRS_OUT2
	I0352/DQ5T3 [D11]	442	C_ADRS_OUT1
	I0663 [K13]	878	C_ADRS_OUT0
	I0265/DQS9T [C13]	339	C_SDR0_CS
	I0349/DQ9T3 [D14]	439	C_SDR1_CS
	I0617 [J15]	823	C_SDR2_CS
	I0350/DQ9T4 [D13]	440	C_SDR3_CS
	I0187/DQS3T [B8]	235	C_SDR0_WE
	I0158/DIFFIO_RX25n [L31]	203	C_SDR0_CAS
	I0156/DIFFIO_RX24p [N31]	201	C_SDR0_RAS
	I0231/DQ16B3 [AK27]	292	C_SDR0_DQSH
	I0139/DQ17B2 [AL29]	181	C_SDR0_DQSL
	I0137/DQS16B [AL27]	179	C_SDR1_DQSH
	I041/DQ16B1 [AM27]	58	C_SDR1_DQSL
	I0108/DIFFIO_RX73n [AD2]	147	C_SDR2_DQSH
	I0232/DQS17B [AK28]	293	C_SDR2_DQSL
	I0138/DQSn16B [AL28]	180	C_SDR3_DQSH
	I042/DQ16B2 [AM28]	59	C_SDR3_DQSL
	I0316/DQ17B3 [AJ28]	398	C_SDR4_DQSH
	I0315/DQ16B4 [AJ27]	397	C_SDR4_DQSL
	I043/DQ17B1 [AM29]	60	C_SDR5_DQSH
	I0446 [AG20]	576	C_SDR5_DQSL
	I0495/DIFFIO_TX77n [AD7]	642	C_SDR6_DQSH
	I018/DIFFIO_RX76p [AF1]	26	C_SDR6_DQSL
	I0292/DIFFIO_RX77n [AF4]	371	C_SDR7_DQSH
	I0433/DIFFIO_TX77p [AD6]	559	C_SDR7_DQSL
	I015/DIFFIO_RX71p [AC1]	23	C_SDR_CKE

CL800 0.8
CL801 0.8
CL802 0.8
CL803 0.8

032 SYS_CLK0
R800 330 NM
C820 0.1uF
GND

48	I033/CLK4p [AM17]	388	CLK_OUT0p
	I0307/PLL12_OUT1p [AJ18]	485	CLK_OUT0n
	I0380/PLL12_OUT1n [AH18]	50	CLK_OUT1p
	I034/PLL12_FBp/OUT2p1 [AM19]	171	CLK_OUT1n
	I0129/PLL12_FBn/OUT2n1 [AL19]	281	CLK_OUT2p
	I0221/PLL6_OUT0p [AK16]	386	CLK_OUT2n
	I0305/PLL6_OUT0n [AJ16]	385	CLK_OUT3p
	I0304/PLL6_OUT1p [AJ15]	482	CLK_OUT3n
	I0377/PLL6_OUT1n [AH15]		

IC3 (6/12)
EP2S60F1020C5N

C_SDR_DATA159	178	I0136/DQSn15B [AL26]	I0432/DIFFIO_TX79p [AC6]	558	C_SDR_DATA79
C_SDR_DATA158	846	I0635 [AC14]	I0373/DQ1B3 [AH9]	476	C_SDR_DATA78
C_SDR_DATA157	902	I0683 [AB21]	I0117/DQS3B [AL7]	159	C_SDR_DATA77
C_SDR_DATA156	724	I0546 [AE14]	I0225/DQ11B3 [AK21]	286	C_SDR_DATA76
C_SDR_DATA155	387	I0306/CLK5n [AJ17]	I0227/DQ13B3 [AK23]	288	C_SDR_DATA75
C_SDR_DATA154	564	I0434/DQS1B [AG8]	I029/DQ7B1 [AM11]	42	C_SDR_DATA74
C_SDR_DATA153	657	I0501 [AF20]	I0309/DQSn10B [AJ20]	390	C_SDR_DATA73
C_SDR_DATA152	575	I0445/DEV_CLRn [AG19]	I0208/DIFFIO_RX79p [AG3]	265	C_SDR_DATA72
C_SDR_DATA151	786	I0589 [AD11]	I0383/DQSn12B [AH22]	489	C_SDR_DATA71
C_SDR_DATA150	793	I0593 [AD18]	I0374/DQ6B4 [AH11]	478	C_SDR_DATA70
C_SDR_DATA149	721	I0543 [AE11]	I0494/DIFFIO_TX79n [AC7]	641	C_SDR_DATA69
C_SDR_DATA148	901	I0682 [AB20]	I0675 [AB13]	894	C_SDR_DATA68
C_SDR_DATA147	289	I0228/DQ13B4 [AK24]	I0544 [AE12]	722	C_SDR_DATA67
C_SDR_DATA146	570	I0440/DQS8B [AG14]	I0371/DQ1B2 [AH7]	474	C_SDR_DATA66
C_SDR_DATA145	569	I0439/DQ8B2 [AG13]	I0133/DQS13B [AL23]	175	C_SDR_DATA65
C_SDR_DATA144	389	I0308/DQ10B2 [AJ19]	I0633 [AC12]	844	C_SDR_DATA64
C_SDR_DATA143	729	I0547 [AE19]	I0498/DQ5B4 [AF12]	649	C_SDR_DATA63
C_SDR_DATA142	794	I0594 [AD19]	I031/DQ9B1 [AM14]	45	C_SDR_DATA62
C_SDR_DATA141	573	I0443/RUnLU [AG17]	I0211/DQSn0B [AK5]	270	C_SDR_DATA61
C_SDR_DATA140	716	I0540/DIFFIO_TX82p [AC8]	I0119/DQSn4B [AL9]	161	C_SDR_DATA60
C_SDR_DATA139	164	I0122/DQSn7B [AL12]	I0115/DQS2B [AL5]	157	C_SDR_DATA59
C_SDR_DATA138	730	I0548 [AE20]	I0591 [AD13]	788	C_SDR_DATA58
C_SDR_DATA137	43	I030/DQ7B2 [AM12]	I0631/DIFFIO_TX81n [AB10]	841	C_SDR_DATA57
C_SDR_DATA136	850	I0639 [AC18]	I032/CLK6p [AM16]	47	C_SDR_DATA56
C_SDR_DATA135	475	I0372/DQSn1B [AH8]	I026/DQ3B2 [AM8]	39	C_SDR_DATA55
C_SDR_DATA134	266	I0209/DIFFIO_RX81p [AH3]	I0585/DIFFIO_TX81p [AB9]	782	C_SDR_DATA54
C_SDR_DATA133	37	I024/DQ2B2 [AM6]	I0219/DQS9B [AK13]	278	C_SDR_DATA53
C_SDR_DATA132	784	I0587/DIFFIO_TX83n [AD9]	I037/DQ13B1 [AM23]	54	C_SDR_DATA52
C_SDR_DATA131	391	I0310/DQ11B4 [AJ21]	I0301/DQ7B4 [AJ12]	382	C_SDR_DATA51
C_SDR_DATA130	843	I0632 [AC11]	I0590 [AD12]	787	C_SDR_DATA50
C_SDR_DATA129	796	I0596 [AD21]	I022/DQ0B1 [AM4]	35	C_SDR_DATA49
C_SDR_DATA128	720	I0542 [AE10]	I0493/DIFFIO_TX80p [AB7]	640	C_SDR_DATA48
C_SDR_DATA127	291	I0230/DQ15B3 [AK26]	I0496/DQ5B3 [AF10]	647	C_SDR_DATA47
C_SDR_DATA126	373	I0294/DIFFIO_RX81n [AH4]	I0678 [AB16]	897	C_SDR_DATA46
C_SDR_DATA125	574	I0444/nCS [AG18]	I0123/DQSn9B [AL13]	165	C_SDR_DATA45
C_SDR_DATA124	899	I0680 [AB18]	I0376/DQSn8B [AH14]	481	C_SDR_DATA44
C_SDR_DATA123	484	I0379/DEV_OE [AH17]	I0299/DQ4B4 [AJ10]	380	C_SDR_DATA43
C_SDR_DATA122	176	I0134/DQSn13B [AL24]	I0586/DIFFIO_TX82n [AC9]	783	C_SDR_DATA42
C_SDR_DATA121	492	I0385/DQSn14B [AH25]	I0215/DQS4B [AK9]	274	C_SDR_DATA41
C_SDR_DATA120	852	I0641 [AC20]	I0545 [AE13]	723	C_SDR_DATA40
C_SDR_DATA119	55	I038/DQ13B2 [AM24]	I0217/DQSn6B [AK11]	276	C_SDR_DATA39
C_SDR_DATA118	480	I0375/DQ8B1 [AH13]	I027/DQ4B1 [AM9]	40	C_SDR_DATA38
C_SDR_DATA117	895	I0676 [AB14]	I0378/CLK7p [AH16]	483	C_SDR_DATA37
C_SDR_DATA116	28	I020/DIFFIO_RX80p [AH1]	I0112/DIFFIO_RX80n [AH2]	151	C_SDR_DATA36
C_SDR_DATA115	172	I0130/DQ10B1 [AL20]	I0300/DQ6B3 [AJ11]	381	C_SDR_DATA35
C_SDR_DATA114	896	I0677 [AB15]	I0210/DQS0B [AK4]	269	C_SDR_DATA34
C_SDR_DATA113	845	I0634 [AC13]	I0435/DQ1B4 [AG9]	565	C_SDR_DATA33
C_SDR_DATA112	395	I0313/DQS14B [AJ25]	I0311/DQS12B [AJ22]	392	C_SDR_DATA32
C_SDR_DATA111	491	I0384/DQ14B2 [AH24]	I021/DIFFIO_RX82p [AJ1]	29	C_SDR_DATA31
C_SDR_DATA110	290	I0229/DQ14B1 [AK25]	I0497/DQS5B [AF11]	648	C_SDR_DATA30
C_SDR_DATA109	160	I0118/DQSn3B [AL8]	I0370/DQ1B1 [AH6]	473	C_SDR_DATA29
C_SDR_DATA108	493	I0386/DQ14B3 [AH26]	I0449/DQ14B4 [AG24]	580	C_SDR_DATA28
C_SDR_DATA107	378	I0298/DQ4B3 [AJ8]	I0226/DQ12B1 [AK22]	287	C_SDR_DATA27
C_SDR_DATA106	152	I0113/DIFFIO_RX82n [AJ2]	I0539/DIFFIO_TX80n [AB8]	715	C_SDR_DATA26
C_SDR_DATA105	486	I0381/DQ10B3 [AH19]	I0642 [AC21]	853	C_SDR_DATA25
C_SDR_DATA104	41	I028/DQ6B1 [AM10]	I0214/DQ4B2 [AK8]	273	C_SDR_DATA24
C_SDR_DATA103	785	I0588/RUP7 [AD10]	I023/DQ2B1 [AM5]	36	C_SDR_DATA23
C_SDR_DATA102	285	I0224/DQS10B [AK20]	I0448/DQ12B4 [AG23]	579	C_SDR_DATA22
C_SDR_DATA101	52	I035/DQ11B1 [AM21]	I0109/DIFFIO_RX74n [AE2]	148	C_SDR_DATA21
C_SDR_DATA100	650	I0499/DQ8B4 [AF13]	I0673/RDN7 [AB11]	892	C_SDR_DATA20
C_SDR_DATA99	851	I0640 [AC19]	I0293/DIFFIO_RX79n [AG4]	372	C_SDR_DATA19
C_SDR_DATA98	568	I0438/DQ5B2 [AG12]	I0312/DQ12B2 [AJ23]	393	C_SDR_DATA18
C_SDR_DATA97	162	I0120/DQ6B2 [AL10]	I0541/DIFFIO_TX83p [AD8]	717	C_SDR_DATA17
C_SDR_DATA96	487	I0382/DQ10B4 [AH20]	I0447/DQ12B3 [AG22]	578	C_SDR_DATA16
C_SDR_DATA95	275	I0216/DQS6B [AK10]	I0630/DIFFIO_TX75p [AA10]	840	C_SDR_DATA15
C_SDR_DATA94	571	I0441/DQ8B3 [AG15]	I0212/DQ2B3 [AK6]	271	C_SDR_DATA14
C_SDR_DATA93	38	I025/DQ3B1 [AM7]	I0206/DIFFIO_RX75p [AE3]	263	C_SDR_DATA13
C_SDR_DATA92	166	I0124/DQ9B2 [AL14]	I0584/DIFFIO_TX78n [AA9]	781	C_SDR_DATA12
C_SDR_DATA91	893	I0674 [AB12]	I0314/DQ15B4 [AJ26]	396	C_SDR_DATA11
C_SDR_DATA90	789	I0592 [AD14]	I0297/DQ3B4 [AJ7]	377	C_SDR_DATA10
C_SDR_DATA89	376	I0296/DQ2B4 [AJ6]	I0213/DQ3B3 [AK7]	272	C_SDR_DATA9
C_SDR_DATA88	173	I0131/DQS11B [AL21]	I0431/DIFFIO_TX74n [AB6]	557	C_SDR_DATA8
C_SDR_DATA87	163	I0121/DQS7B [AL11]	I0538/DIFFIO_TX78p [AA8]	714	C_SDR_DATA7
C_SDR_DATA86	898	I0679 [AB17]	I017/DIFFIO_RX74p [AE1]	25	C_SDR_DATA6
C_SDR_DATA85	277	I0218/DQ7B3 [AK12]	I039/DQ15B1 [AM25]	56	C_SDR_DATA5
C_SDR_DATA84	567	I0437/DQSn5B [AG11]	I0368/DIFFIO_TX74p [AB5]	466	C_SDR_DATA4
C_SDR_DATA83	566	I0436/DQ5B1 [AG10]	I0116/DQSn2B [AL6]	158	C_SDR_DATA3
C_SDR_DATA82	384	I0303/DQ9B4 [AJ14]	I0672/DIFFIO_TX75n [AA11]	891	C_SDR_DATA2
C_SDR_DATA81	383	I0302/DQ9B3 [AJ13]	I0291/DIFFIO_RX75n [AE4]	370	C_SDR_DATA1
C_SDR_DATA80	168	I0126/CLK6n [AL16]	I0595 [AD20]	795	C_SDR_DATA0

CL805 0.8

Frame Memory Board
MY-114 (8/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_8

MY-114 (9/45)
SUFFIX: -11

Y_SDR_CTRL | 011, 017, 018, 019, 020
Y_CLK_BUS | 012
Y_SDR_DATA | 017, 018, 019, 020

IC3 (3/12)
EP2S60F1020C5N

IO670/DIFFIO_TX64n [U11]	887	Y_ADRS_OUT14
IO101/CLK8n/DIFFIO_RX_C2n [U2]	140	Y_ADRS_OUT13
IO582/DIFFIO_TX68n [W9]	779	Y_ADRS_OUT12
IO627/DIFFIO_TX64p [U10]	836	Y_ADRS_OUT11
IO96/DIFFIO_RX60n [M2]	135	Y_ADRS_OUT10
IO426/DIFFIO_TX63n [U6]	552	Y_ADRS_OUT9
IO200/DIFFIO_RX61n [R3]	253	Y_ADRS_OUT8
IO104/DIFFIO_RX65p [Y2]	143	Y_ADRS_OUT7
IO12/DIFFIO_RX64p [W1]	19	Y_ADRS_OUT6
IO201/DIFFIO_RX63n [V3]	256	Y_ADRS_OUT5
IO202/DIFFIO_RX65n [Y3]	258	Y_ADRS_OUT4
IO157/DIFFIO_RX23n [M31]	202	Y_ADRS_OUT3
IO103/DIFFIO_RX64n [W2]	142	Y_ADRS_OUT2
IO364/DIFFIO_TX63p [U5]	461	Y_ADRS_OUT1
IO102/DIFFIO_RX63p [V2]	141	Y_ADRS_OUT0
IO668/DIFFIO_TX60n [R11]	885	Y_SDR0_CS
IO99/DIFFIO_RX61p [R2]	138	Y_SDR1_CS
IO362/DIFFIO_TX59n [R5]	459	Y_SDR2_CS
IO363/DIFFIO_TX61p [T5]	460	Y_SDR3_CS
IO574 [H11]	766	Y_SDR0_WE
IO95/DIFFIO_RX58n [L2]	134	Y_SDR0_CAS
IO425/DIFFIO_TX61n [T6]	551	Y_SDR0_RAS
IO365/DIFFIO_TX67n [V5]	462 CL900 0.8	Y_SDR0_DQSH
IO285/DIFFIO_TX67p [V4]	363	Y_SDR0_DQSL
IO427/DIFFIO_TX66p [V6]	553	Y_SDR1_DQSH
IO105/DIFFIO_RX66n [AA2]	144	Y_SDR1_DQSL
IO326/DIFFIO_TX23p [R29]	413 CL901 0.8	Y_SDR2_DQSH
IO606/DIFFIO_TX24n [R24]	808	Y_SDR2_DQSL
IO395/DIFFIO_TX23n [R28]	508	Y_SDR3_DQSH
IO243/DIFFIO_RX24n [N30]	312	Y_SDR3_DQSL
IO559/DIFFIO_TX24p [R25]	745 CL902 0.8	Y_SDR4_DQSH
IO581/DIFFIO_TX65p [V9]	778	Y_SDR4_DQSL
IO628/DIFFIO_TX65n [V10]	837	Y_SDR5_DQSH
IO57/DIFFIO_RX23p [M32]	83	Y_SDR5_DQSL
IO203/DIFFIO_RX67p [AA3]	259 CL903 0.8	Y_SDR6_DQSH
IO288/DIFFIO_RX67n [AA4]	366	Y_SDR6_DQSL
IO13/DIFFIO_RX66p [AA1]	21	Y_SDR7_DQSH
IO489/DIFFIO_TX66n [V7]	636	Y_SDR7_DQSL
IO8/DIFFIO_RX60p [M1]	12	Y_SDR_CKE
IO345/PLL11_OUT1p [D18]	435	CLK_OUT4p
IO407/PLL11_OUT1n [E18]	528	CLK_OUT4n
IO177/PLL11_OUT0p [B18]	225	CLK_OUT5p
IO261/PLL11_OUT0n [C18]	334	CLK_OUT5n
IO180/PLL5_OUT0p [B15]	228	CLK_OUT6p
IO264/PLL5_OUT0n [C15]	337	CLK_OUT6n
IO348/PLL5_FBp/OUT2p4 [D15]	438	CLK_OUT7p
IO410/PLL5_FBn/OUT2n4 [E15]	531	CLK_OUT7n
IO76/CLK14p [A17]	109	


032 | SYS_CLK1

R900 330 NM
C960 0.1uF
GND

IC3 (4/12)
EP2S60F1020C5N


Y_SDR_DATA159	811	IO609/DIFFIO_TX34n [M24]	IO529/DQ6T4 [G10]	698 Y_SDR_DATA79
Y_SDR_DATA158	631	IO486/DIFFIO_TX52n [N7]	IO267/DQSn5T [C11]	341 Y_SDR_DATA78
Y_SDR_DATA157	351	IO276/DIFFIO_RX46n [F4]	IO478/DQS6T [F11]	620 Y_SDR_DATA77
Y_SDR_DATA156	359	IO283/DIFFIO_TX56p [P4]	IO356/DQ1T4 [D6]	447 Y_SDR_DATA76
Y_SDR_DATA155	206	IO161/DIFFIO_RX32n [H31]	IO696 [L17]	919 Y_SDR_DATA75
Y_SDR_DATA154	127	IO88/DIFFIO_RX43n [D2]	IO274/DQS0T [C4]	348 Y_SDR_DATA74
Y_SDR_DATA153	88	IO62/DIFFIO_RX33p [G32]	IO396/DIFFIO_TX29n [P28]	509 Y_SDR_DATA73
Y_SDR_DATA152	771	IO577/DIFFIO_TX45p [L9]	IO179/CLK12n [B16]	227 Y_SDR_DATA72
Y_SDR_DATA151	9	IO5/DIFFIO_RX52p [J1]	IO84/DQ2T1 [A7]	119 Y_SDR_DATA71
Y_SDR_DATA150	545	IO419/DIFFIO_TX47p [K6]	IO327/DIFFIO_TX29p [P29]	414 Y_SDR_DATA70
Y_SDR_DATA149	702	IO530/DIFFIO_TX43p [J8]	IO85/DQ1T1 [A6]	120 Y_SDR_DATA69
Y_SDR_DATA148	243	IO192/DIFFIO_RX44p [E3]	IO659 [K17]	874 Y_SDR_DATA68
Y_SDR_DATA147	207	IO162/DIFFIO_RX33n [G31]	IO483/DIFFIO_TX47n [K7]	628 Y_SDR_DATA67
Y_SDR_DATA146	865	IO651/DIFFIO_TX33p [N23]	IO411/DQSn8T [E14]	532 Y_SDR_DATA66
Y_SDR_DATA145	706	IO534/DIFFIO_TX53p [N8]	IO159/DIFFIO_RX29n [K31]	204 Y_SDR_DATA65
Y_SDR_DATA144	457	IO360/DIFFIO_RX56n [N5]	IO665/RDN4 [K11]	880 Y_SDR_DATA64
Y_SDR_DATA143	831	IO623/DIFFIO_TX49p [M10]	IO475/DQS8T [F14]	617 Y_SDR_DATA63
Y_SDR_DATA142	208	IO163/DIFFIO_RX34n [F31]	IO701/RUP4 [L12]	924 Y_SDR_DATA62
Y_SDR_DATA141	360	IO284/DIFFIO_TX59p [R4]	IO479/DQ4T3 [F10]	621 Y_SDR_DATA61
Y_SDR_DATA140	540	IO417/DQ2T4 [E6]	IO418/DIFFIO_TX42p [J6]	544 Y_SDR_DATA60
Y_SDR_DATA139	132	IO93/DIFFIO_RX52n [J2]	IO422/DIFFIO_TX52p [N6]	548 Y_SDR_DATA59
Y_SDR_DATA138	696	IO527/DQ6T2 [G12]	IO92/DIFFIO_RX51n [H2]	131 Y_SDR_DATA58
Y_SDR_DATA137	346	IO272/DQ1T3 [C6]	IO266/DQS7T [C12]	340 Y_SDR_DATA57
Y_SDR_DATA136	824	IO618 [J14]	IO355/DQS2T [D7]	446 Y_SDR_DATA56
Y_SDR_DATA135	539	IO416/DQ2T3 [E7]	IO573 [H12]	765 Y_SDR_DATA55
Y_SDR_DATA134	825	IO619 [J13]	IO608/DIFFIO_TX31n [N24]	810 Y_SDR_DATA54
Y_SDR_DATA133	769	IO575/DIFFIO_TX43n [J9]	IO188/DQ2T2 [B7]	236 Y_SDR_DATA53
Y_SDR_DATA132	112	IO78/DQ9T1 [A14]	IO196/DIFFIO_RX53p [K3]	248 Y_SDR_DATA52
Y_SDR_DATA131	697	IO528/DQ6T3 [G11]	IO189/DQSn1T [B6]	237 Y_SDR_DATA51
Y_SDR_DATA130	826	IO620 [J12]	IO160/DIFFIO_RX31n [J31]	205 Y_SDR_DATA50
Y_SDR_DATA129	115	IO80/DQ7T2 [A11]	IO414/DQSn4T [E9]	537 Y_SDR_DATA49
Y_SDR_DATA128	877	IO662 [K14]	IO526/DQ8T4 [G13]	695 Y_SDR_DATA48
Y_SDR_DATA127	921	IO698 [L15]	IO532/DIFFIO_TX46n [L8]	704 Y_SDR_DATA47
Y_SDR_DATA126	705	IO533/DIFFIO_TX50p [M8]	IO361/DIFFIO_TX56n [P5]	458 Y_SDR_DATA46
Y_SDR_DATA125	677	IO515/DIFFIO_TX32n [M26]	IO58/DIFFIO_RX25p [L32]	84 Y_SDR_DATA45
Y_SDR_DATA124	354	IO278/DIFFIO_RX50n [J4]	IO61/DIFFIO_RX32p [H32]	87 Y_SDR_DATA44
Y_SDR_DATA123	533	IO412/DQ8T1 [E13]	IO421/DIFFIO_TX51p [M6]	547 Y_SDR_DATA43
Y_SDR_DATA122	231	IO183/DQSn7T [B12]	IO279/DIFFIO_RX53n [K4]	355 Y_SDR_DATA42
Y_SDR_DATA121	8	IO4/DIFFIO_RX51p [H1]	IO576/DIFFIO_TX44n [K9]	770 Y_SDR_DATA41
Y_SDR_DATA120	89	IO63/DIFFIO_RX34p [F32]	IO89/DIFFIO_RX45n [E2]	128 Y_SDR_DATA40
Y_SDR_DATA119	875	IO660 [K16]	IO275/DIFFIO_RX44n [E4]	350 Y_SDR_DATA39
Y_SDR_DATA118	121	IO86/DQ1T2 [A5]	IO193/DIFFIO_RX46p [F3]	244 Y_SDR_DATA38
Y_SDR_DATA117	920	IO697 [L16]	IO282/DIFFIO_RX56p [N4]	358 Y_SDR_DATA37
Y_SDR_DATA116	748	IO562/DIFFIO_TX34p [M25]	IO579/DIFFIO_TX53n [N9]	773 Y_SDR_DATA36
Y_SDR_DATA115	448	IO357/DQ0T3 [D5]	IO94/DIFFIO_RX54n [K2]	133 Y_SDR_DATA35
Y_SDR_DATA114	232	IO184/DQ7T3 [B11]	IO667/DIFFIO_TX57n [P11]	884 Y_SDR_DATA34
Y_SDR_DATA113	347	IO273/DQSn0T [C5]	IO195/DIFFIO_RX50p [J3]	247 Y_SDR_DATA33
Y_SDR_DATA112	922	IO699 [L14]	IO245/DIFFIO_RX28p [L30]	314 Y_SDR_DATA32
Y_SDR_DATA111	122	IO87/DQ0T1 [A4]	IO688/DIFFIO_TX25n [R22]	910 Y_SDR_DATA31
Y_SDR_DATA110	114	IO79/DQ7T1 [A12]	IO607/DIFFIO_TX27n [P24]	809 Y_SDR_DATA30
Y_SDR_DATA109	234	IO186/DQSn3T [B9]	IO580/DIFFIO_TX54n [P9]	774 Y_SDR_DATA29
Y_SDR_DATA108	830	IO622/DIFFIO_TX45n [L10]	IO424/DIFFIO_TX58p [R6]	550 Y_SDR_DATA28
Y_SDR_DATA107	627	IO482/DIFFIO_TX42n [J7]	IO624/DIFFIO_TX57p [P10]	833 Y_SDR_DATA27
Y_SDR_DATA106	449	IO358/DQ0T4 [E5]	IO535/DIFFIO_TX54p [P8]	707 Y_SDR_DATA26
Y_SDR_DATA105	86	IO60/DIFFIO_RX31p [J32]	IO7/DIFFIO_RX58p [L1]	11 Y_SDR_DATA25
Y_SDR_DATA104	535	IO413/DQ6T1 [E11]	IO488/DIFFIO_TX58n [R7]	633 Y_SDR_DATA24
Y_SDR_DATA103	615	IO473/CLK13n [F16]	IO666/DIFFIO_TX49n [M11]	882 Y_SDR_DATA23
Y_SDR_DATA102	445	IO354/DQ4T1 [D8]	IO281/DIFFIO_RX57n [M4]	357 Y_SDR_DATA22
Y_SDR_DATA101	703	IO531/DIFFIO_TX44p [K8]	IO277/DIFFIO_RX48n [G4]	352 Y_SDR_DATA21
Y_SDR_DATA100	827	IO621 [J11]	IO91/DIFFIO_RX49n [G2]	130 Y_SDR_DATA20
Y_SDR_DATA99	238	IO190/DQS1T [B5]	IO461/DIFFIO_TX30p [N27]	597 Y_SDR_DATA19
Y_SDR_DATA98	623	IO481/DQ4T4 [F8]	IO198/DIFFIO_RX57p [M3]	250 Y_SDR_DATA18
Y_SDR_DATA97	230	IO182/DQSn9T [B13]	IO561/DIFFIO_TX31p [N25]	747 Y_SDR_DATA17
Y_SDR_DATA96	345	IO271/DQSn2T [C7]	IO514/DIFFIO_TX30n [N26]	676 Y_SDR_DATA16
Y_SDR_DATA95	764	IO572 [H13]	IO246/DIFFIO_RX30p [K30]	315 Y_SDR_DATA15
Y_SDR_DATA94	629	IO484/DIFFIO_TX46p [L7]	IO331/DIFFIO_RX30n [K29]	418 Y_SDR_DATA14
Y_SDR_DATA93	879	IO664 [K12]	IO194/DIFFIO_RX48p [G3]	245 Y_SDR_DATA13
Y_SDR_DATA92	598	IO462/DIFFIO_TX32p [M27]	IO485/DIFFIO_TX51n [M7]	630 Y_SDR_DATA12
Y_SDR_DATA91	618	IO476/DQ8T3 [F13]	IO578/DIFFIO_TX50n [M9]	772 Y_SDR_DATA11
Y_SDR_DATA90	876	IO661 [K15]	IO244/DIFFIO_RX26p [M30]	313 Y_SDR_DATA10
Y_SDR_DATA89	619	IO477/DQSn6T [F12]	IO359/DIFFIO_TX48p [L5]	455 Y_SDR_DATA9
Y_SDR_DATA88	912	IO689/DIFFIO_TX33n [N22]	IO459/DIFFIO_TX26p [R27]	595 Y_SDR_DATA8
Y_SDR_DATA87	10	IO6/DIFFIO_RX54p [K1]	IO512/DIFFIO_TX26n [R26]	674 Y_SDR_DATA7
Y_SDR_DATA86	441	IO351/DQ7T4 [D12]	IO1/DIFFIO_RX45p [E1]	5 Y_SDR_DATA6
Y_SDR_DATA85	117	IO82/DQ3T1 [A9]	IO329/DIFFIO_RX26n [M29]	416 Y_SDR_DATA5
Y_SDR_DATA84	4	IO0/DIFFIO_RX43p [D1]	IO420/DIFFIO_TX48n [L6]	546 Y_SDR_DATA4
Y_SDR_DATA83	6	IO2/DIFFIO_RX47p [F1]	IO328/DIFFIO_RX27p [N29]	415 Y_SDR_DATA3
Y_SDR_DATA82	616	IO474/DQ8T2 [F15]	IO560/DIFFIO_TX27p [P25]	746 Y_SDR_DATA2
Y_SDR_DATA81	538	IO415/DQ4T2 [E8]	IO3/DIFFIO_RX49p [G1]	7 Y_SDR_DATA1
Y_SDR_DATA80	763	IO571 [H14]	IO397/DIFFIO_RX27n [N28]	510 CL904 0.8 Y_SDR_DATA0

Frame Memory Board
MY-114 (9/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_9

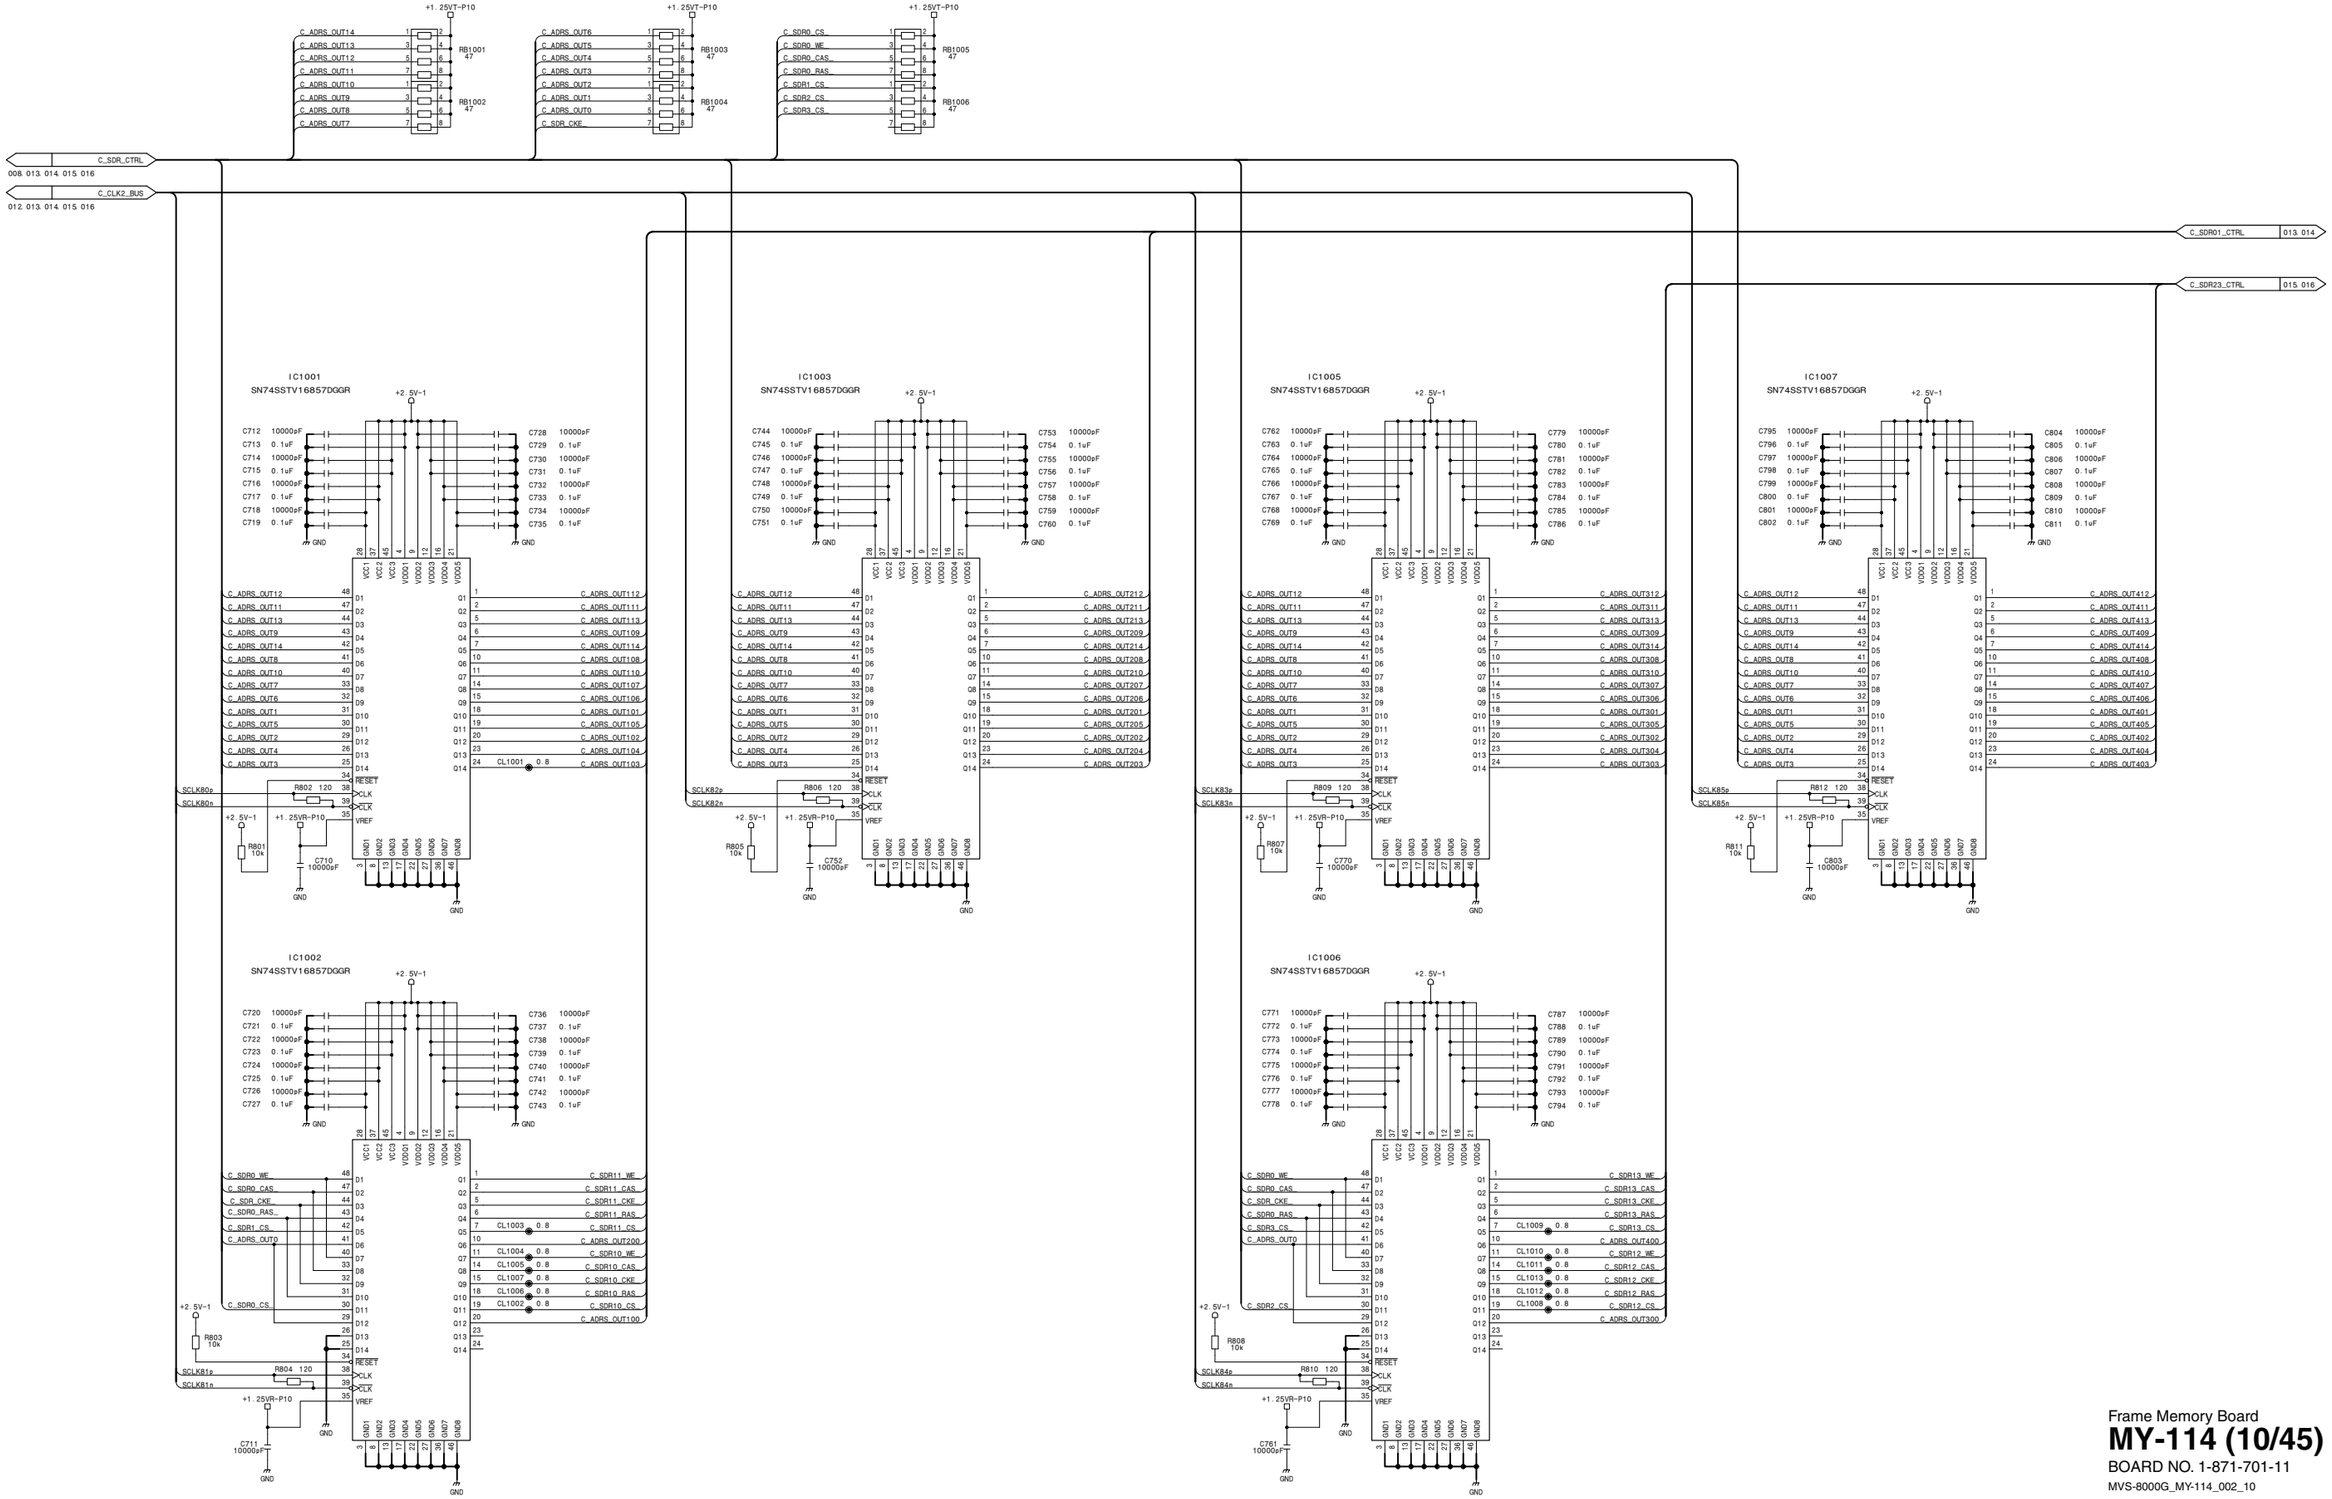


Frame Memory Board
MY-114 (10/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_10


MVS-6000 MM

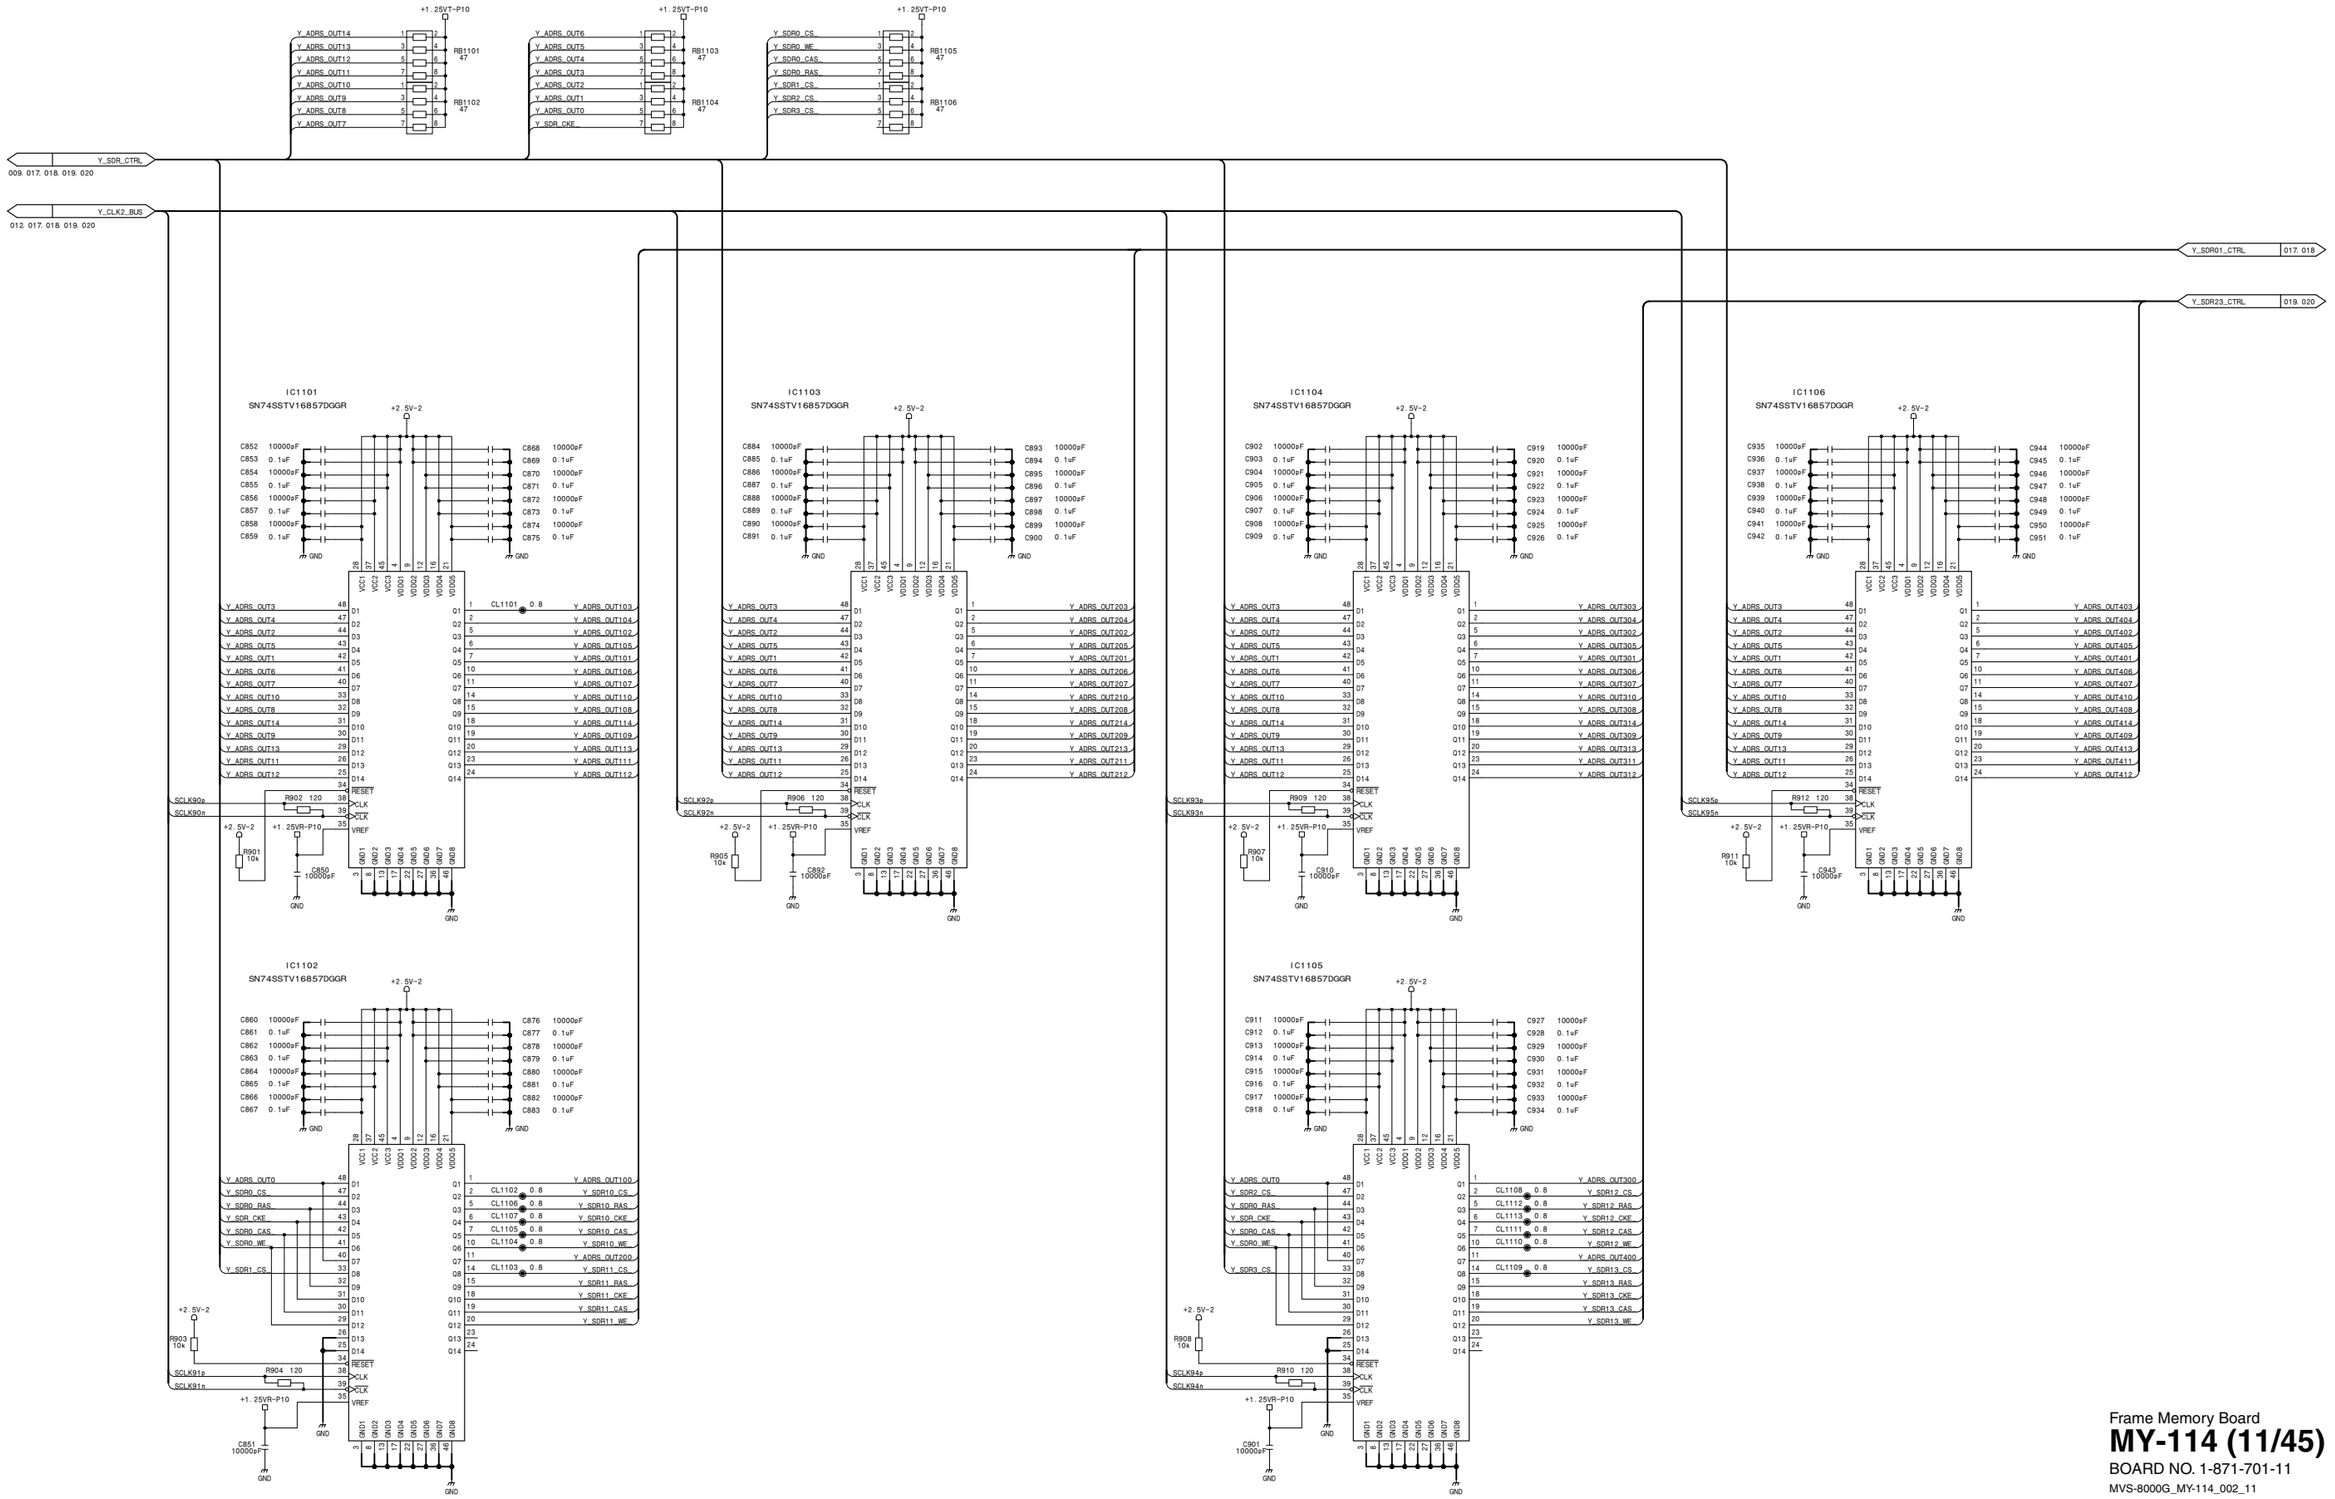


Frame Memory Board
MY-114 (11/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_11

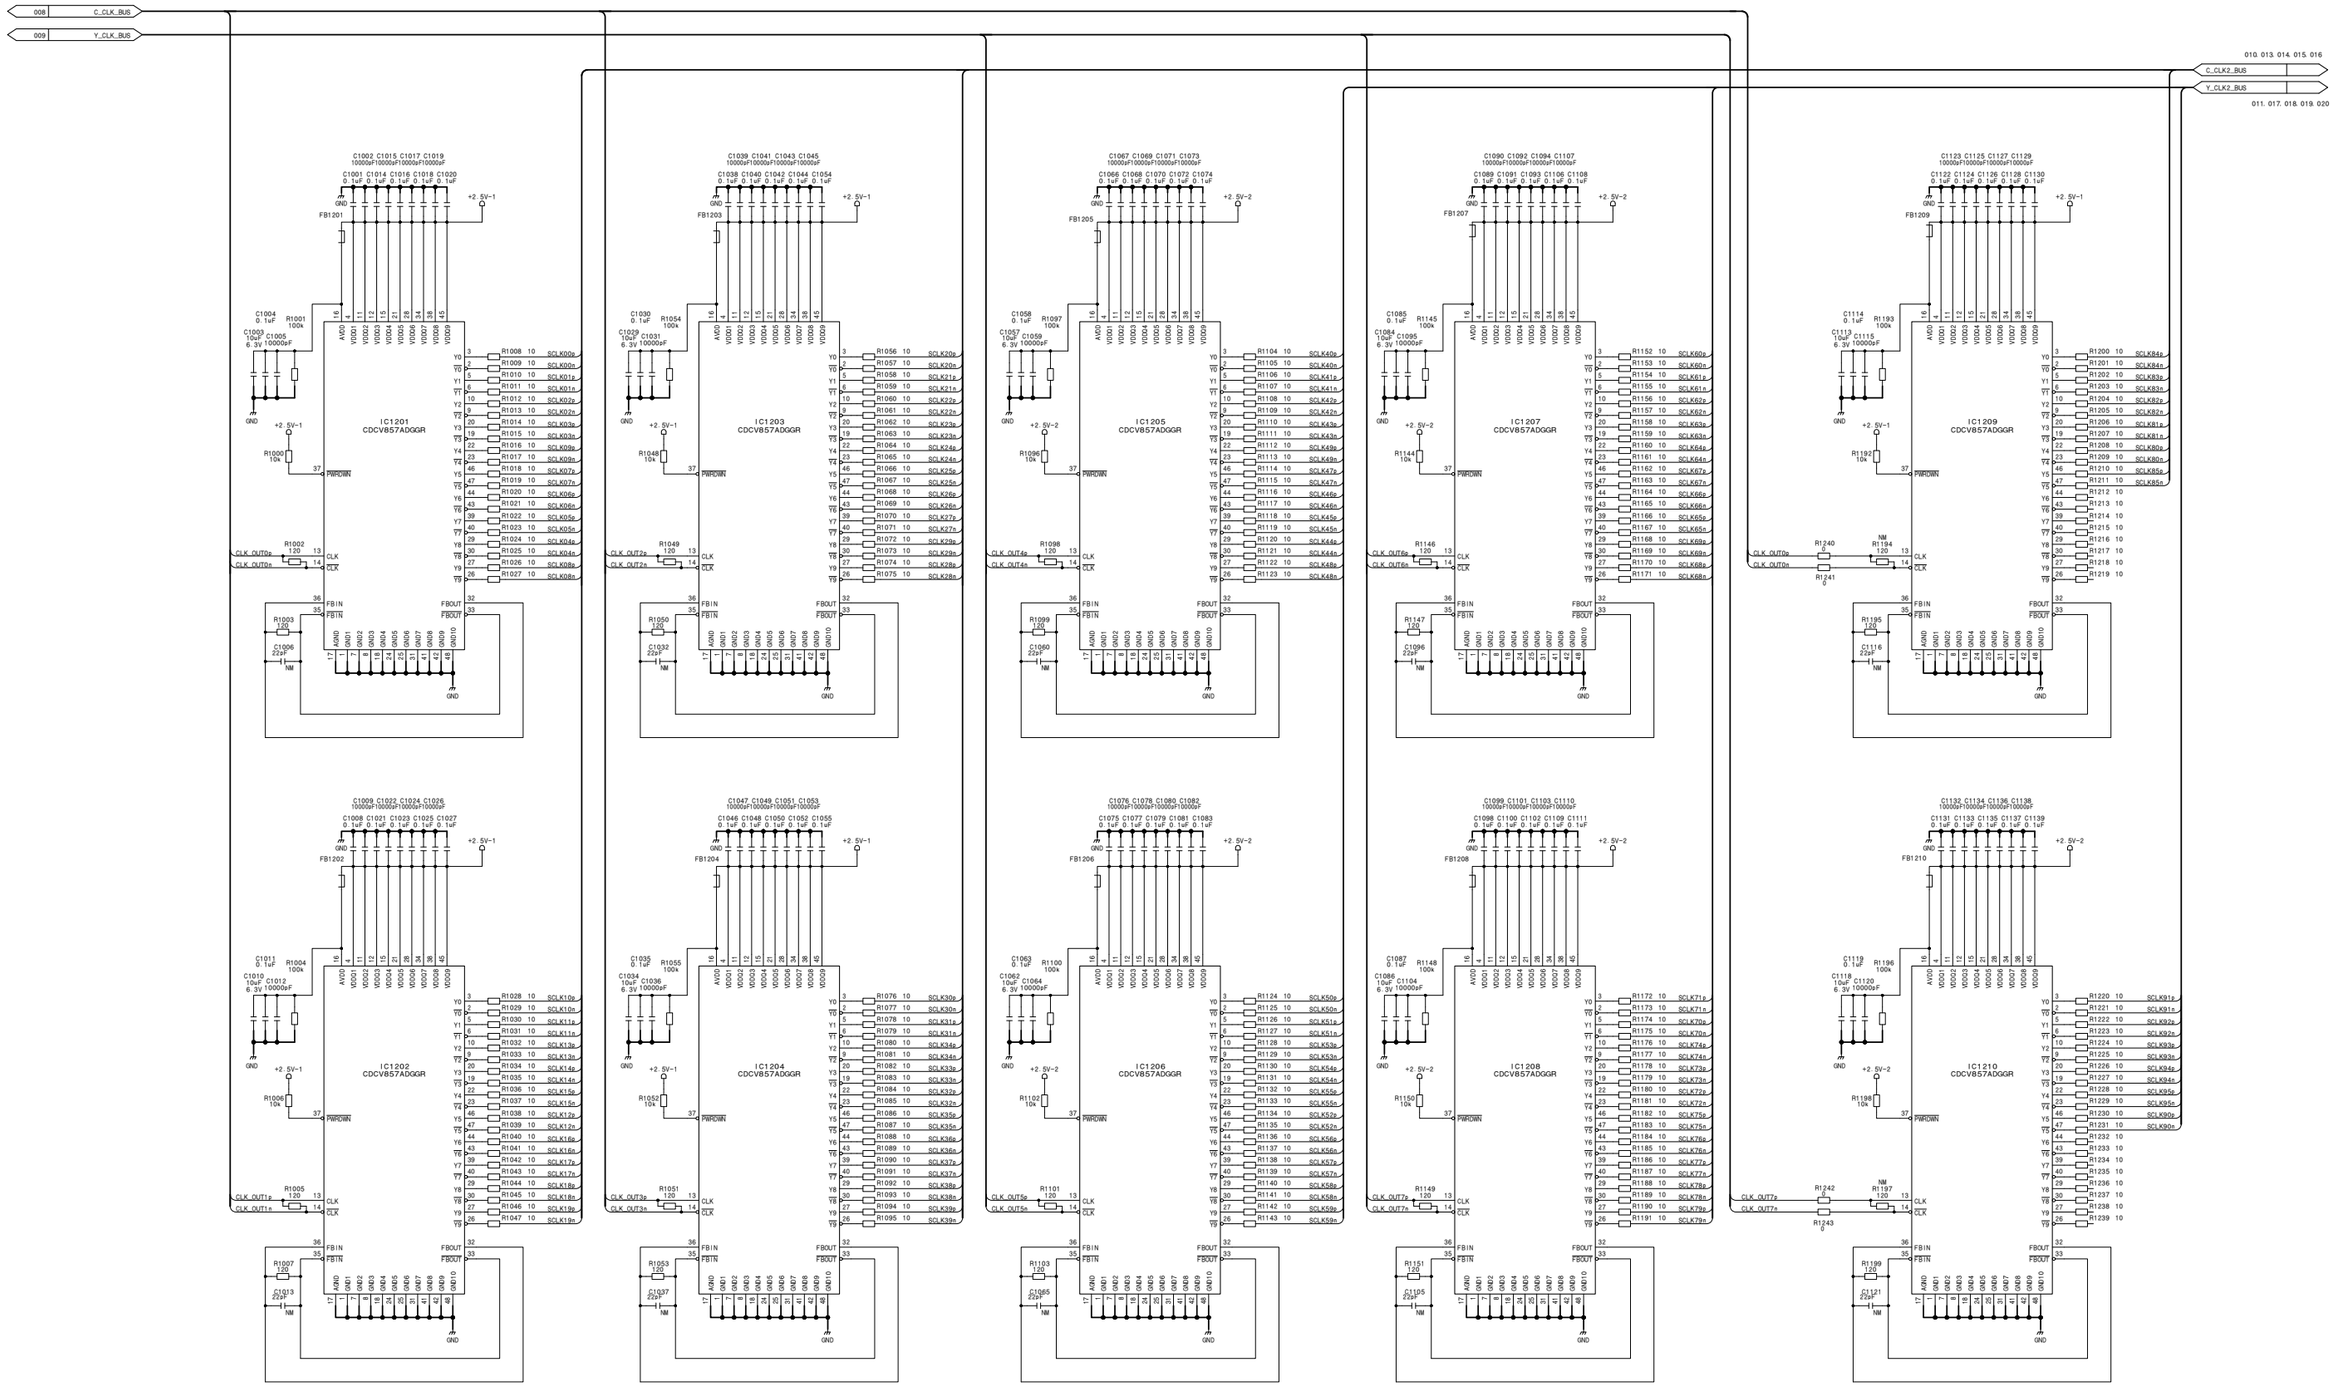

Frame Memory Board
MY-114 (12/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_12

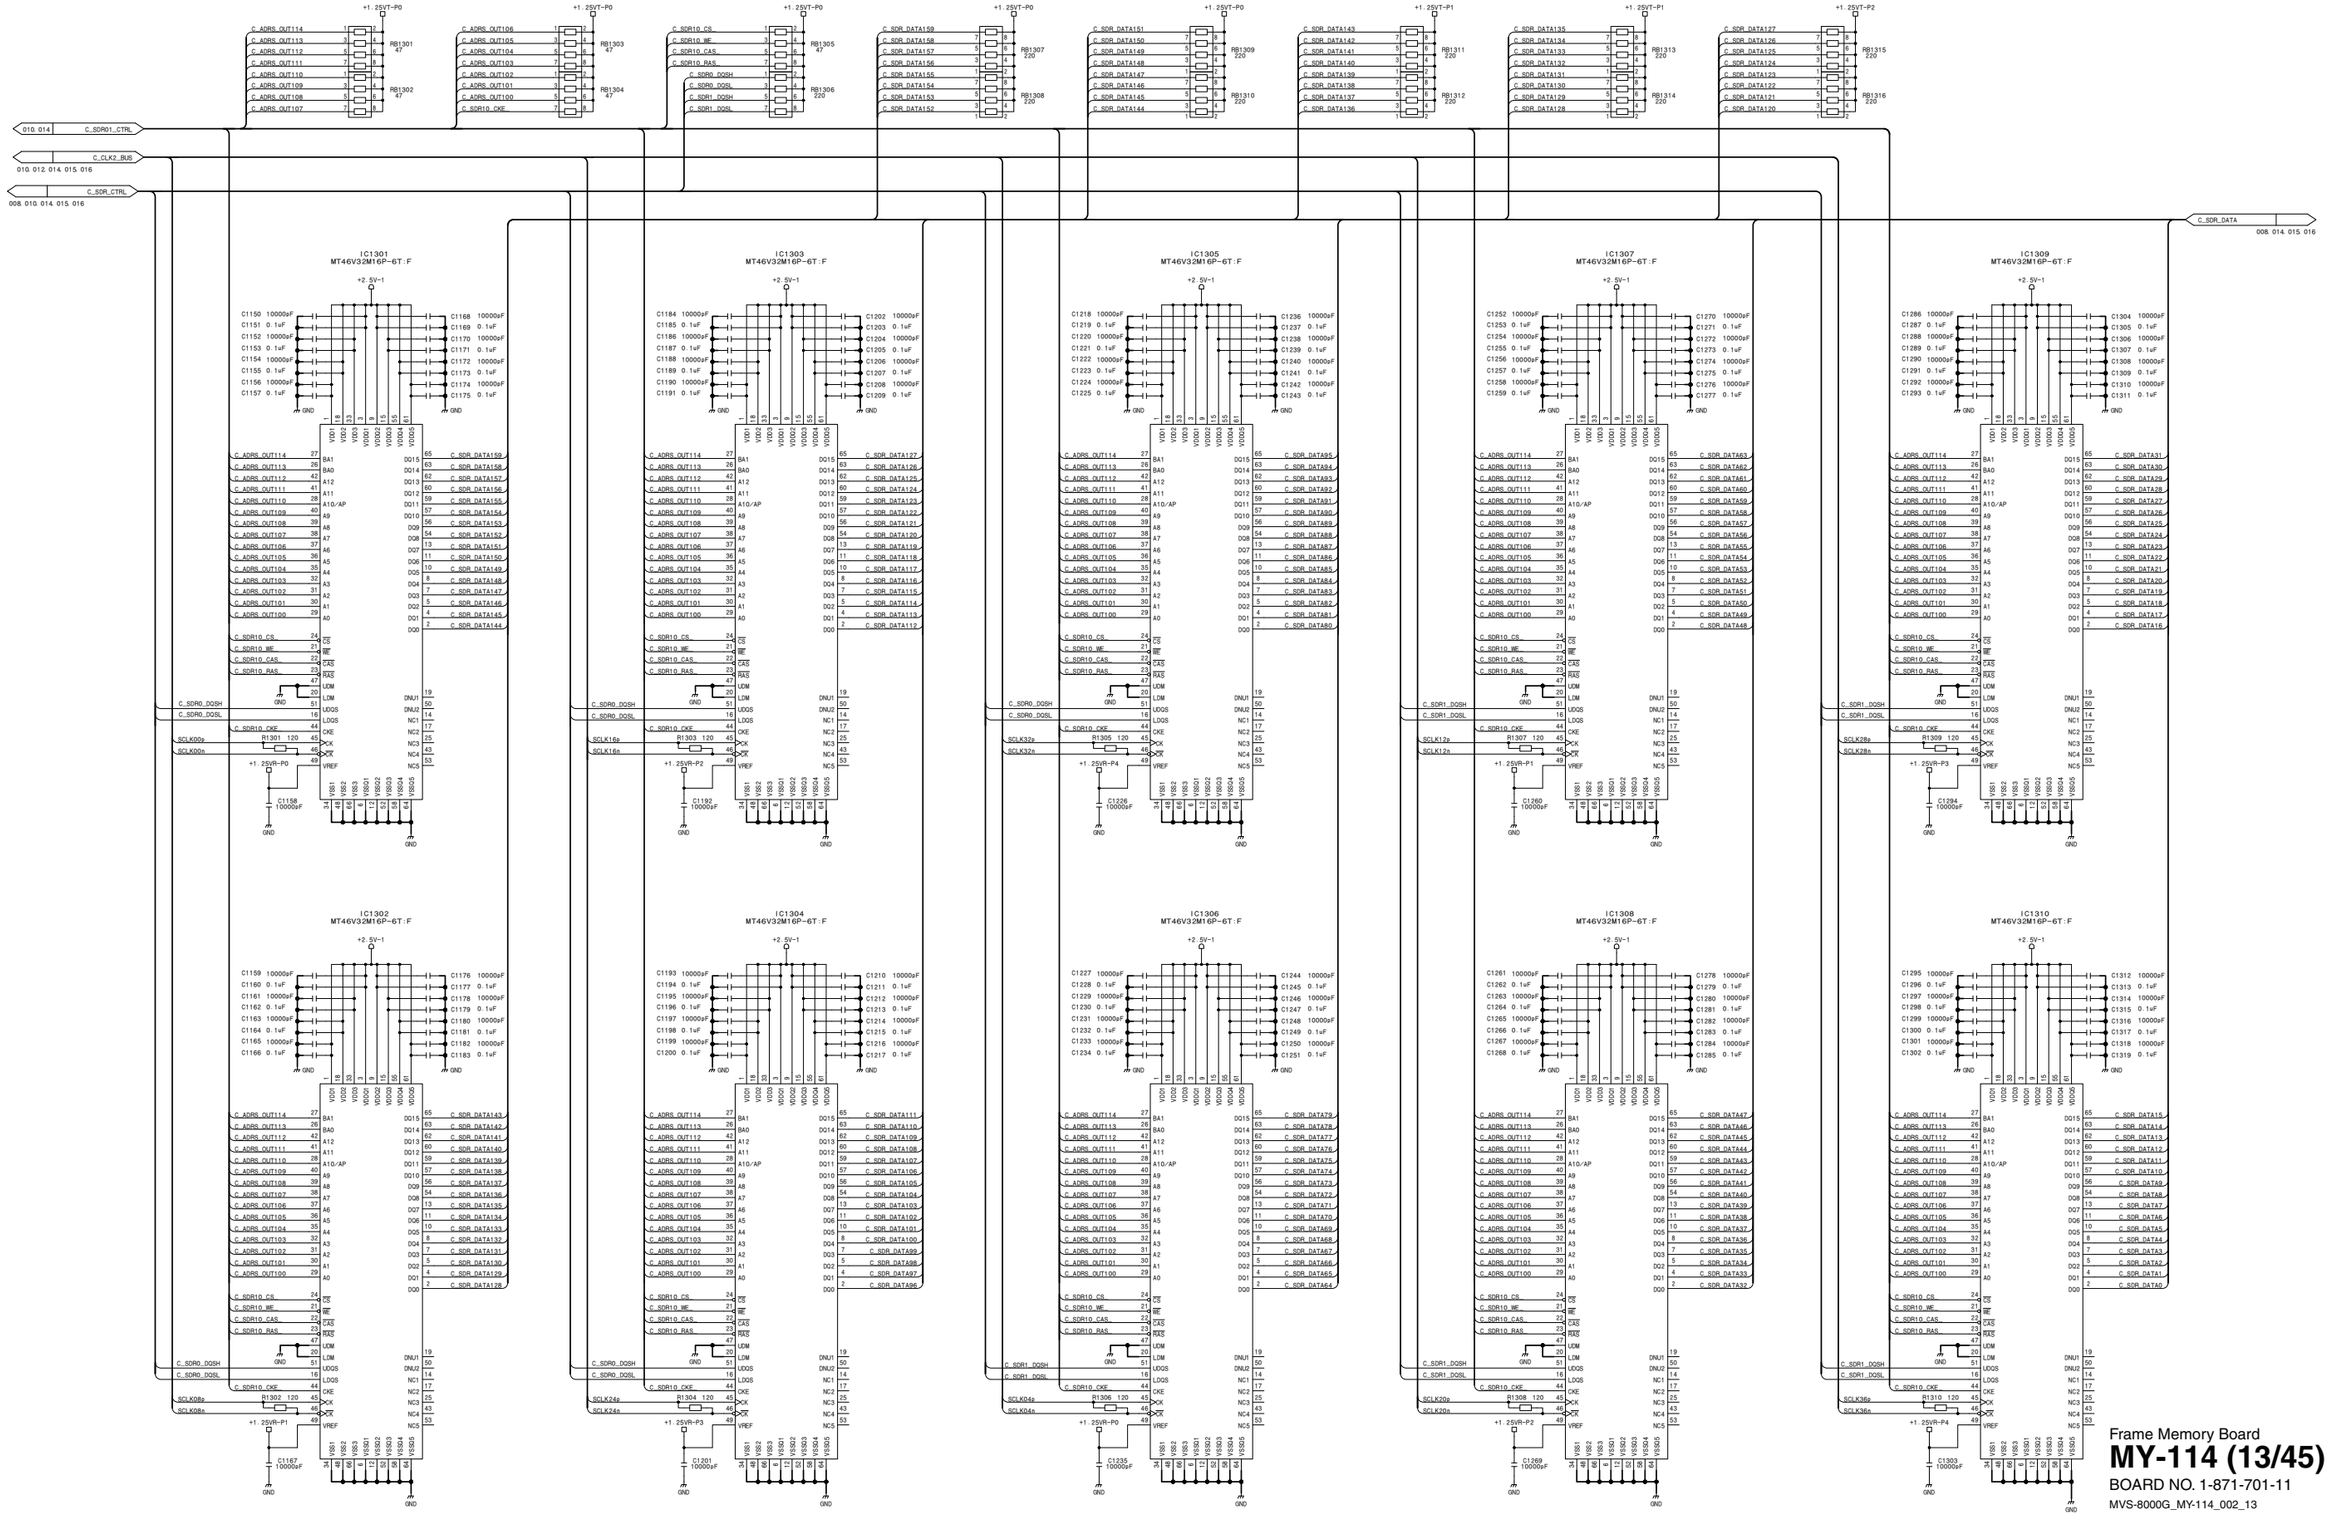


Frame Memory Board
MY-114 (13/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_13

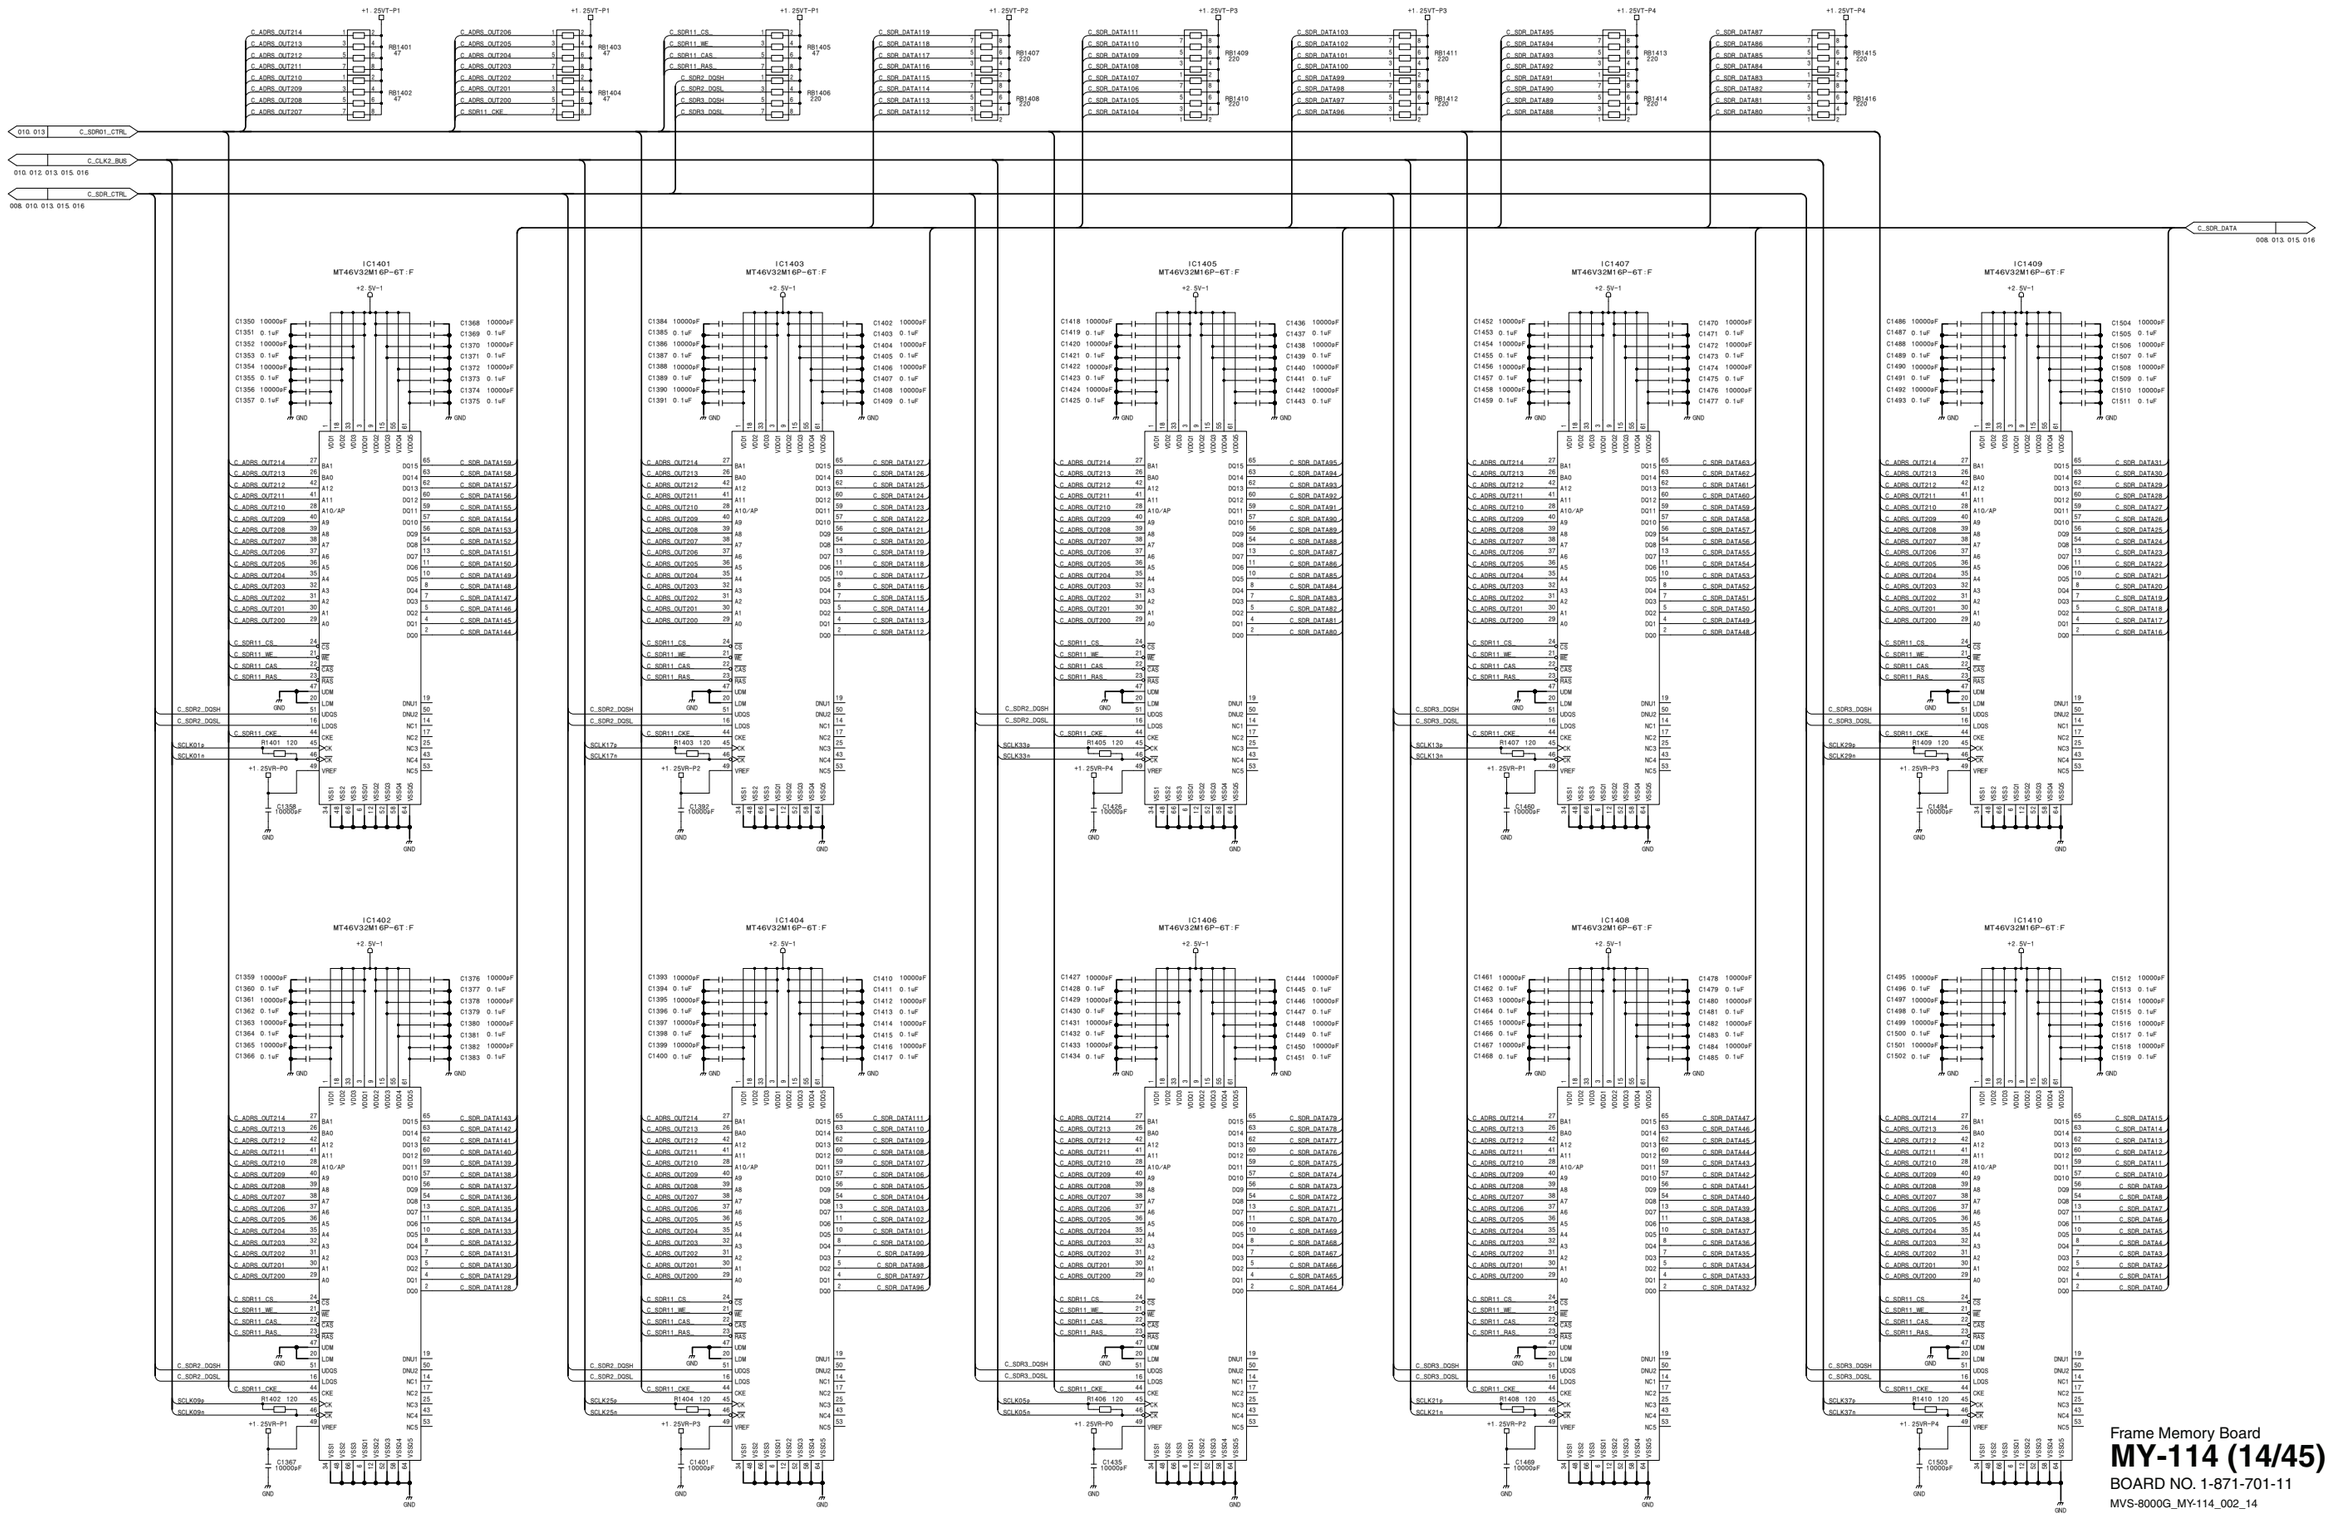

Frame Memory Board
MY-114 (14/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_14

MVS-6000 MM

MY-114 (15/45)
SUFFIX: -11

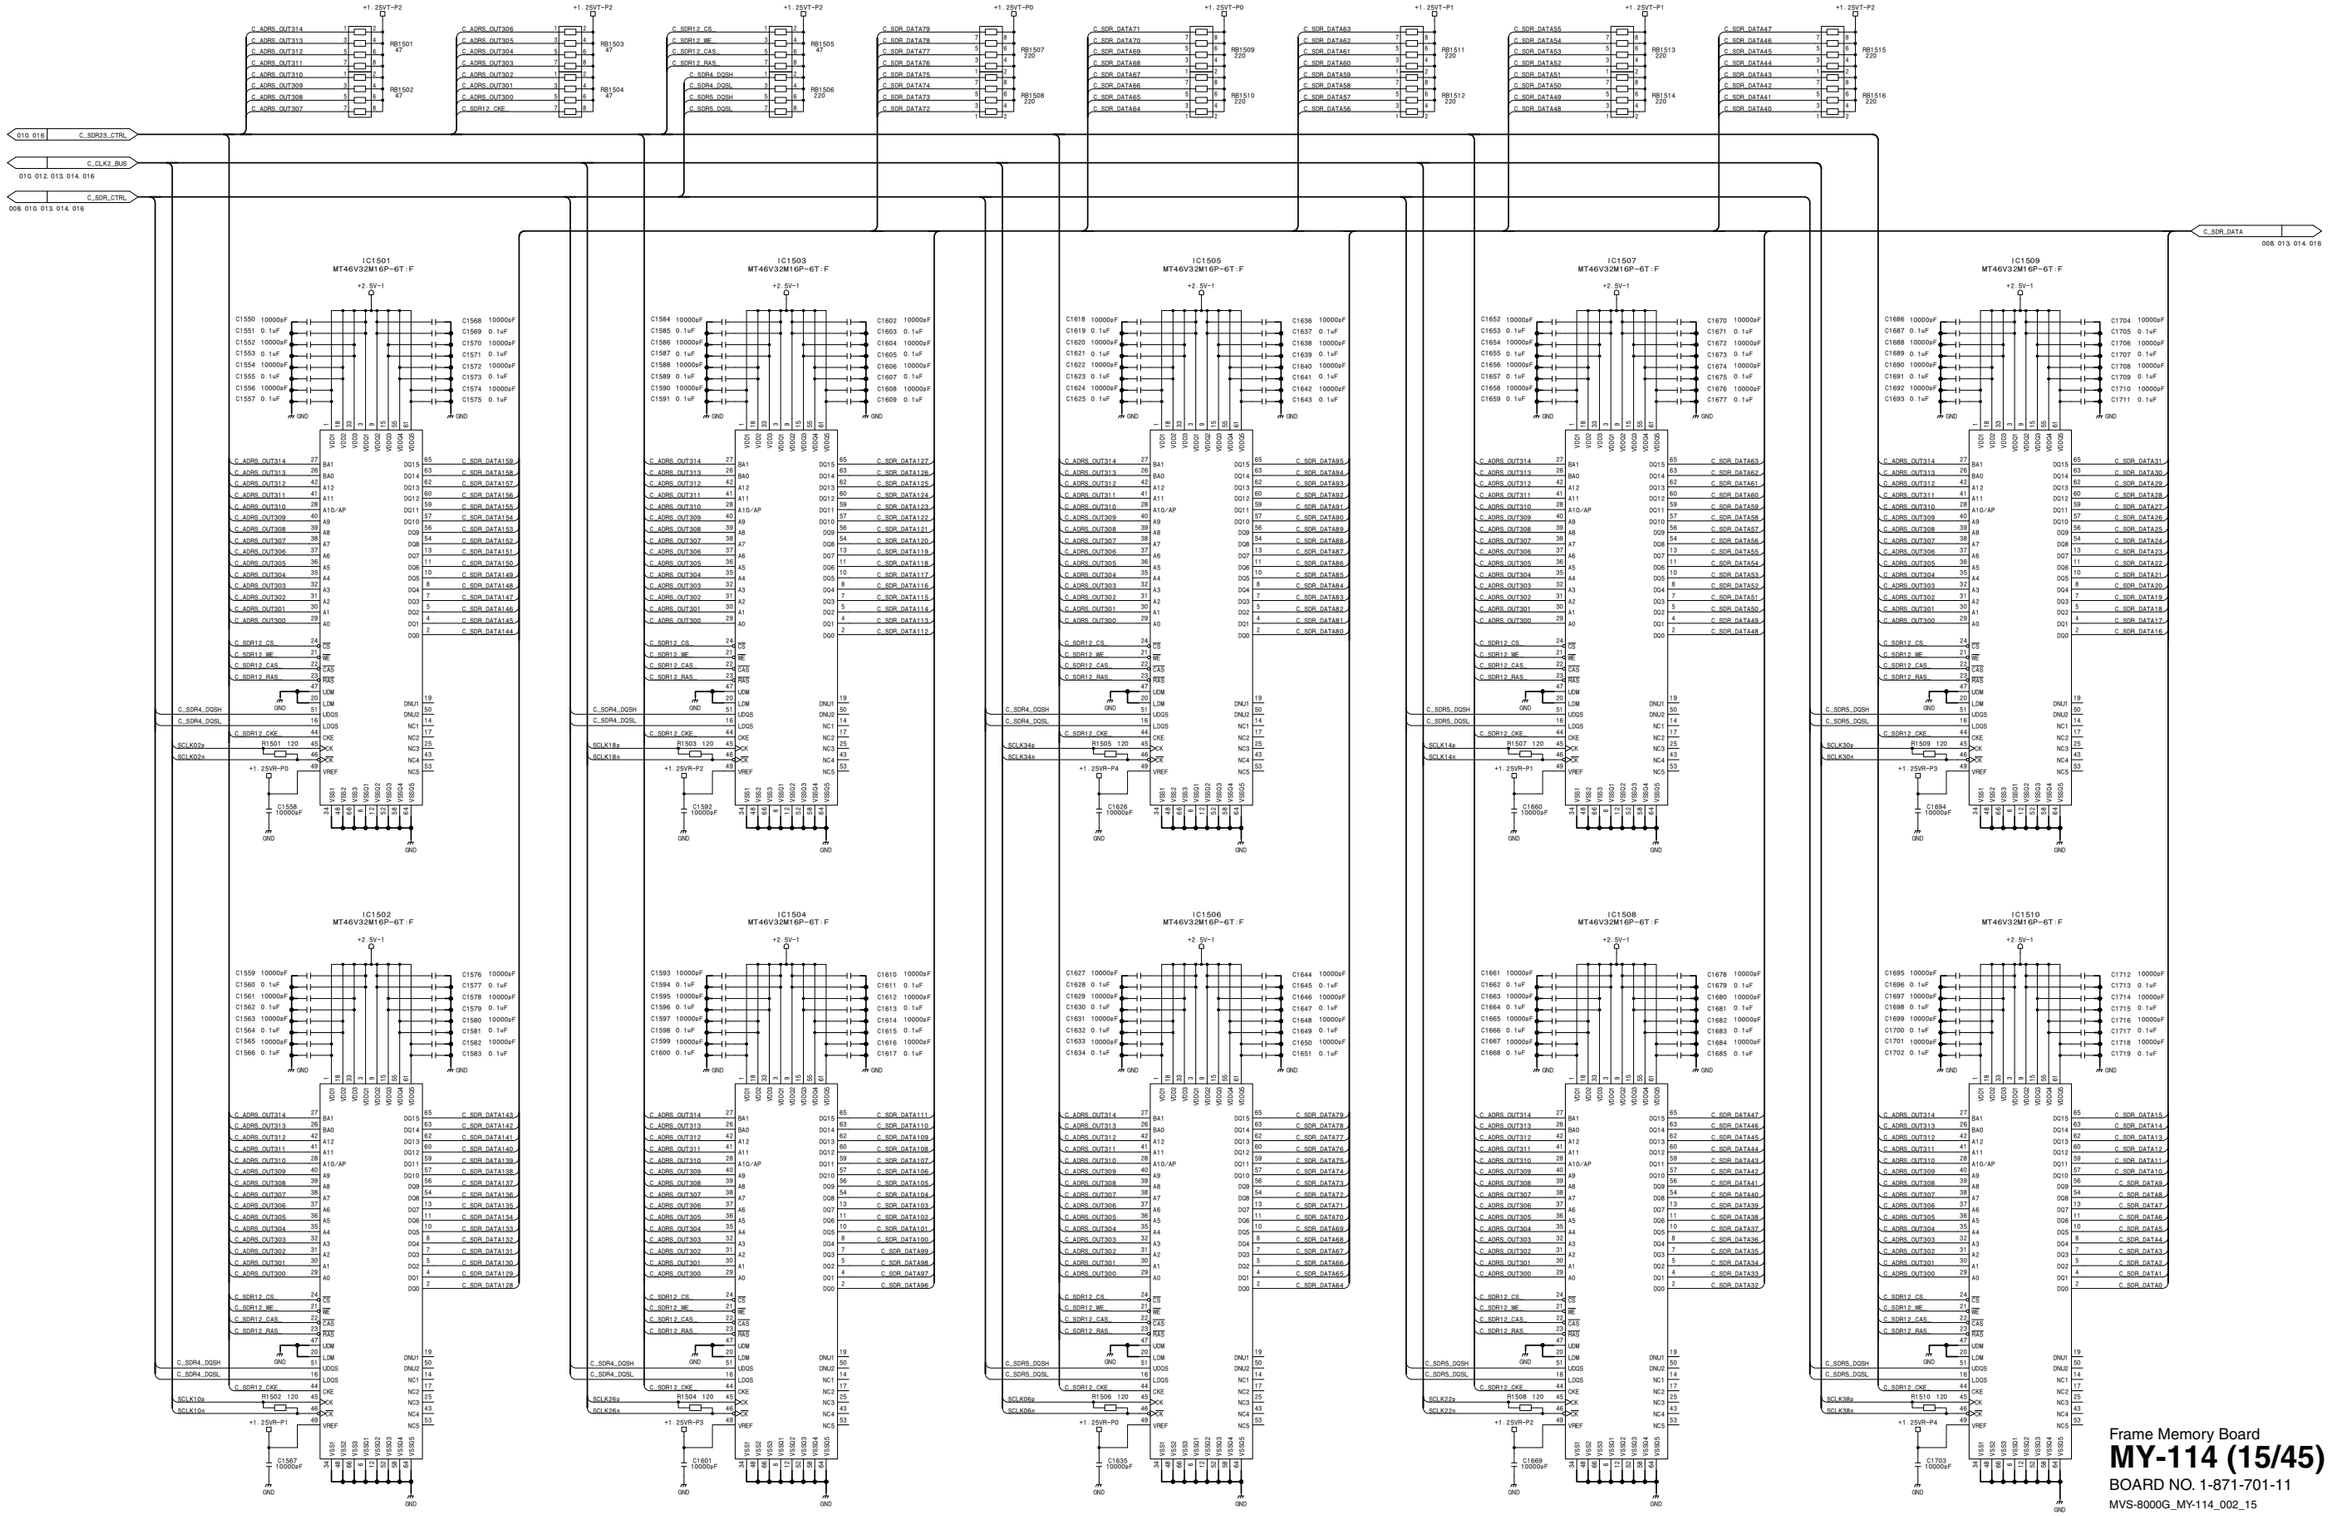


MVS-6000 MM

Frame Memory Board
MY-114 (15/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_15

MY-114 (16/45)
SUFFIX: -11


MY-114 (16/45)
SUFFIX: -11

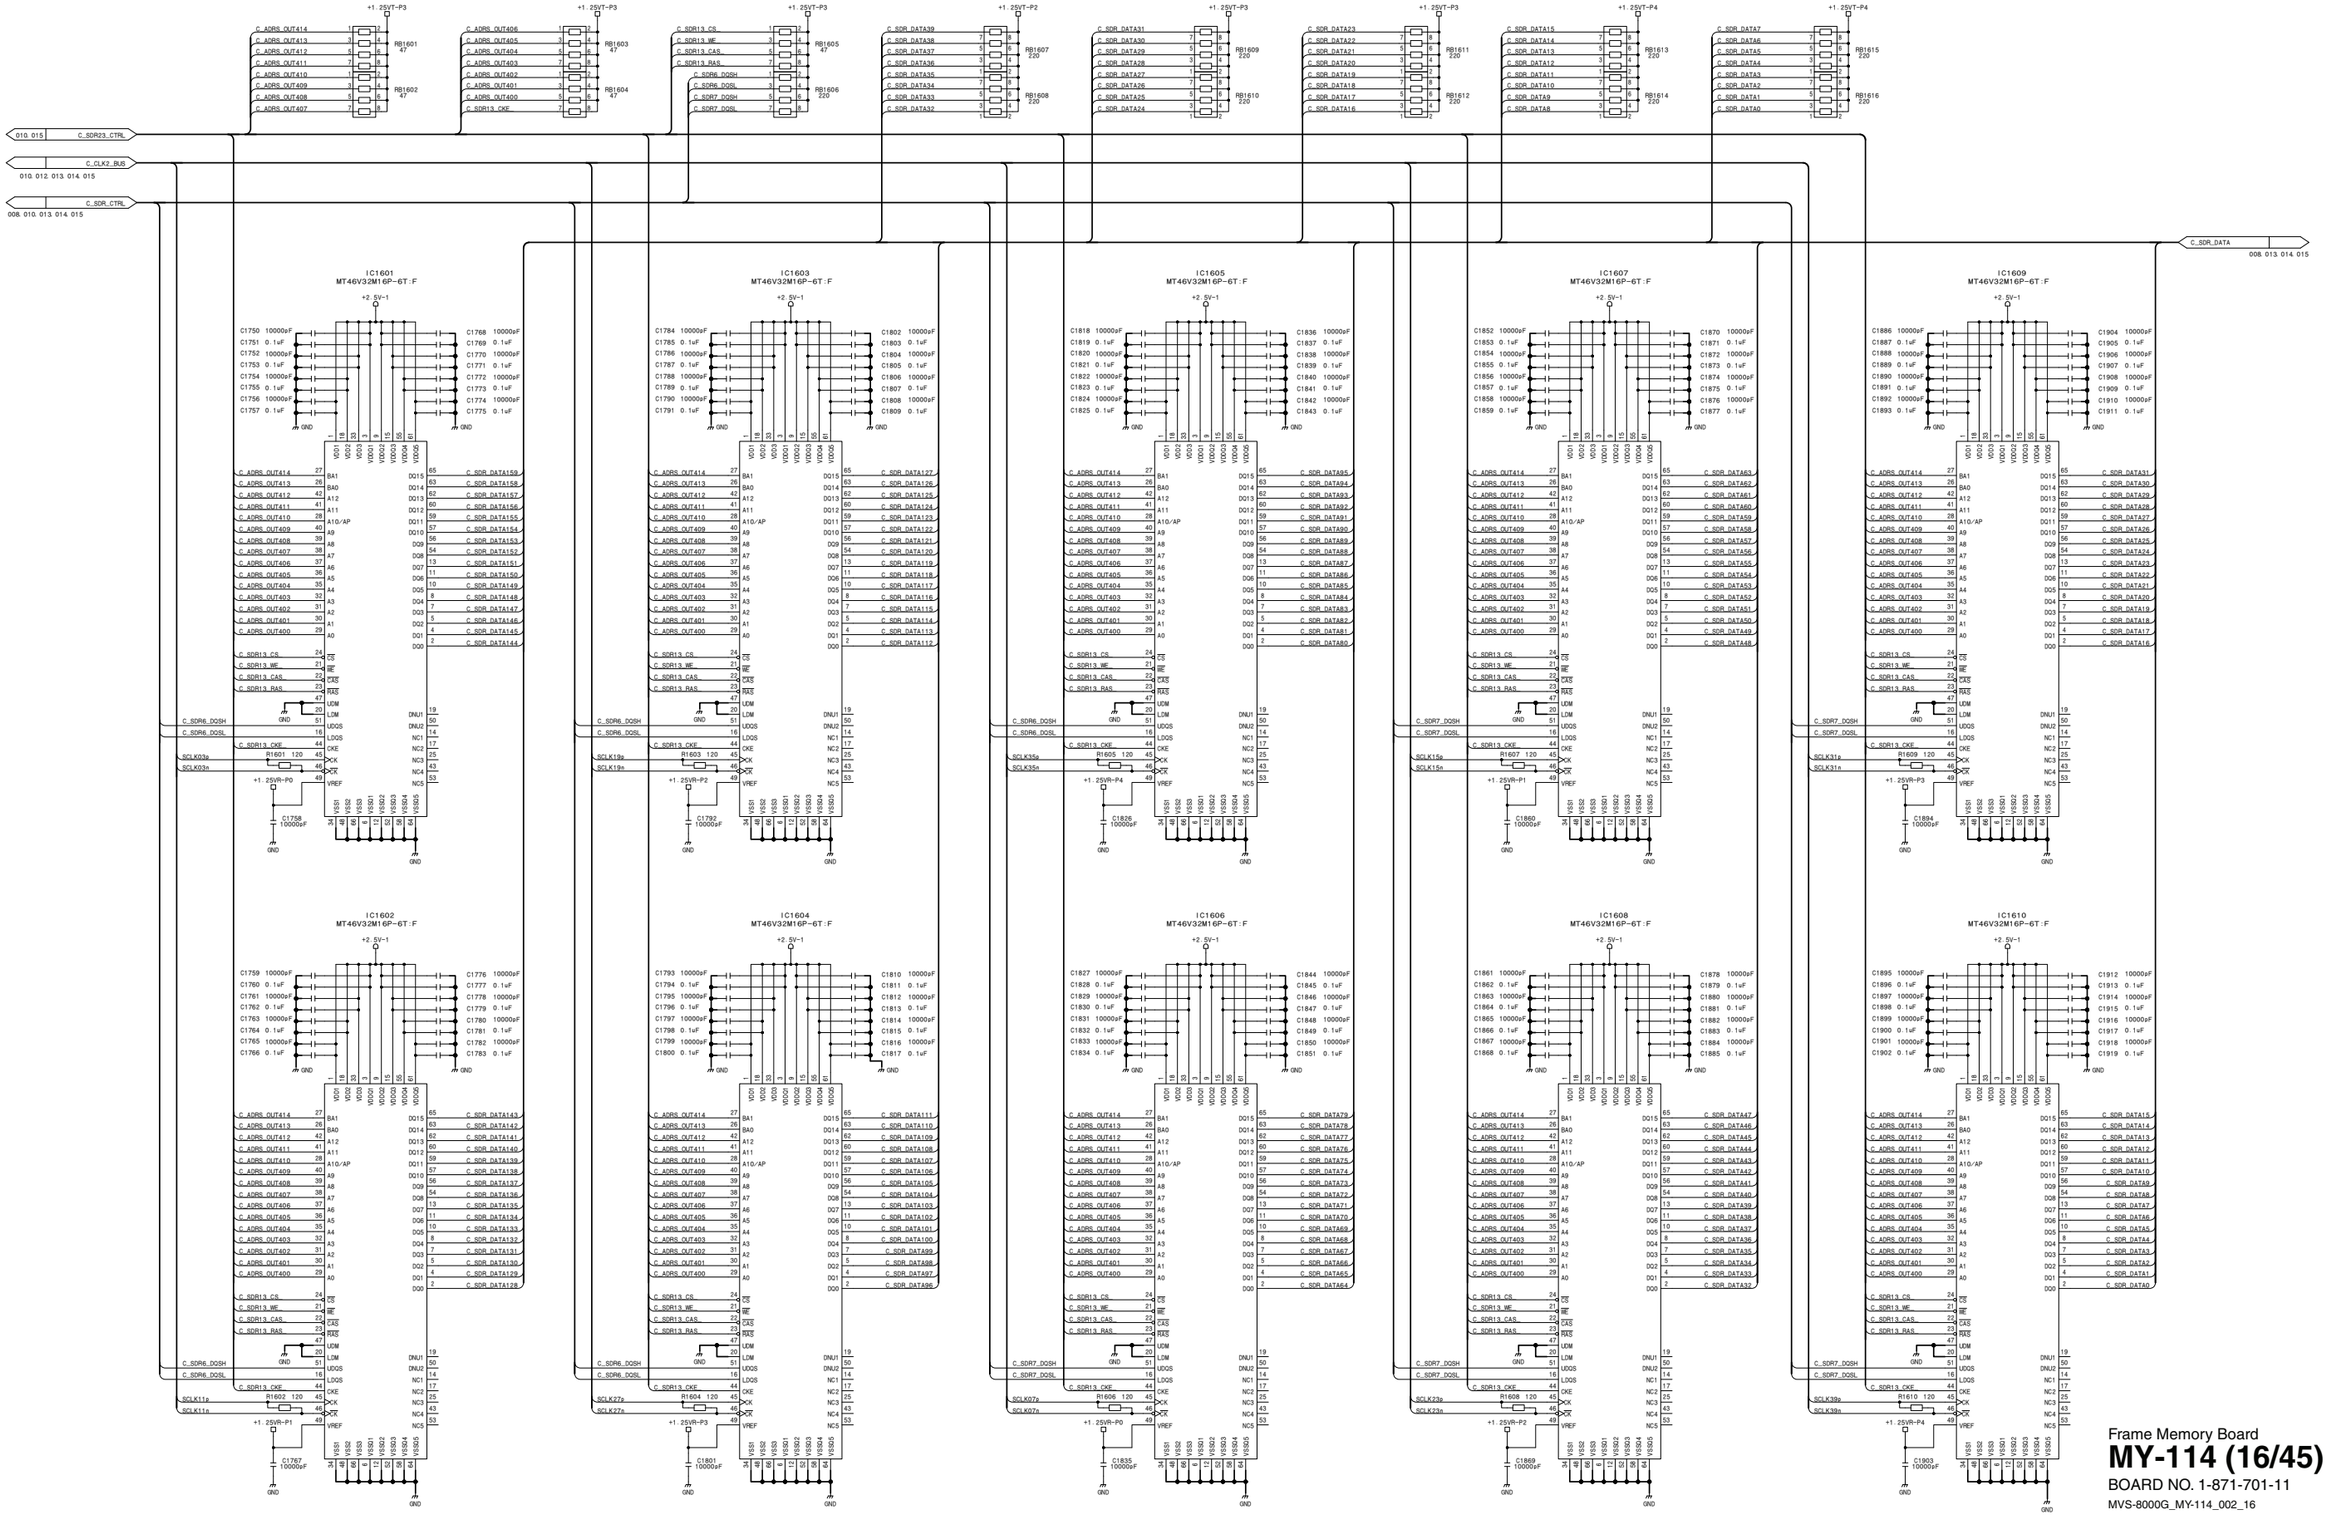

Frame Memory Board
MY-114 (16/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_16


4-208

MVS-6000 MM

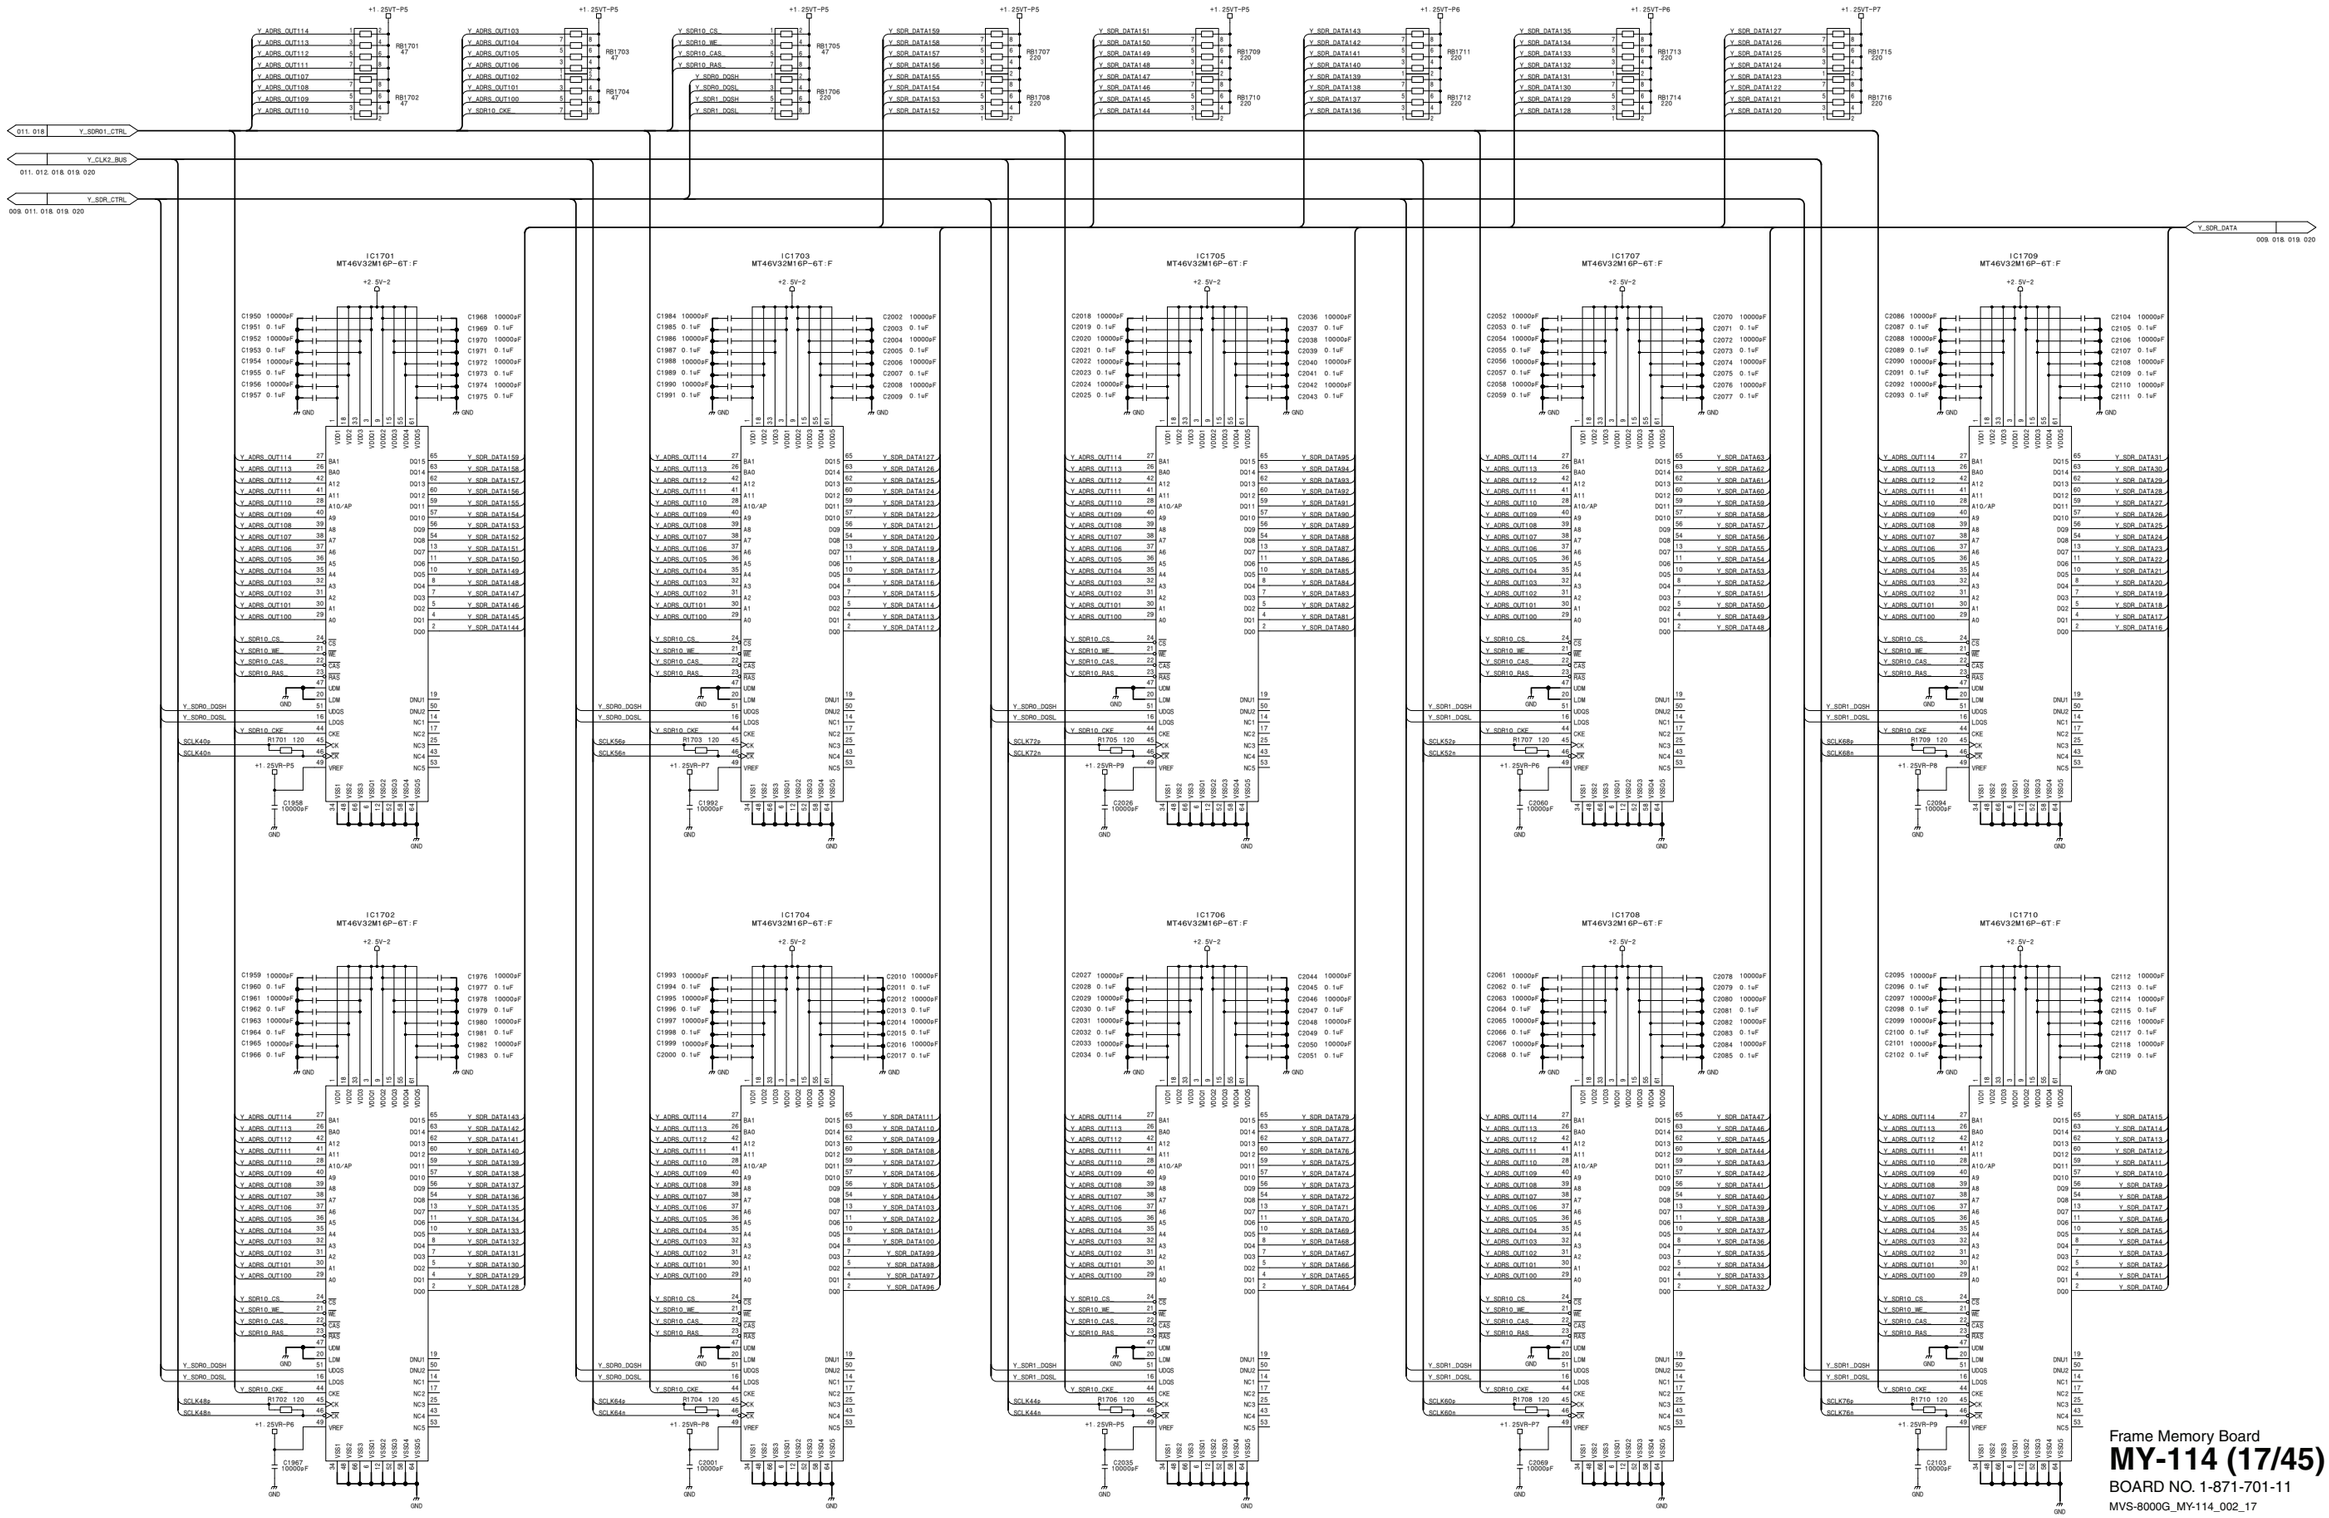

Frame Memory Board
MY-114 (17/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_17

MY-114 (18/45) **SUFFIX: -11**

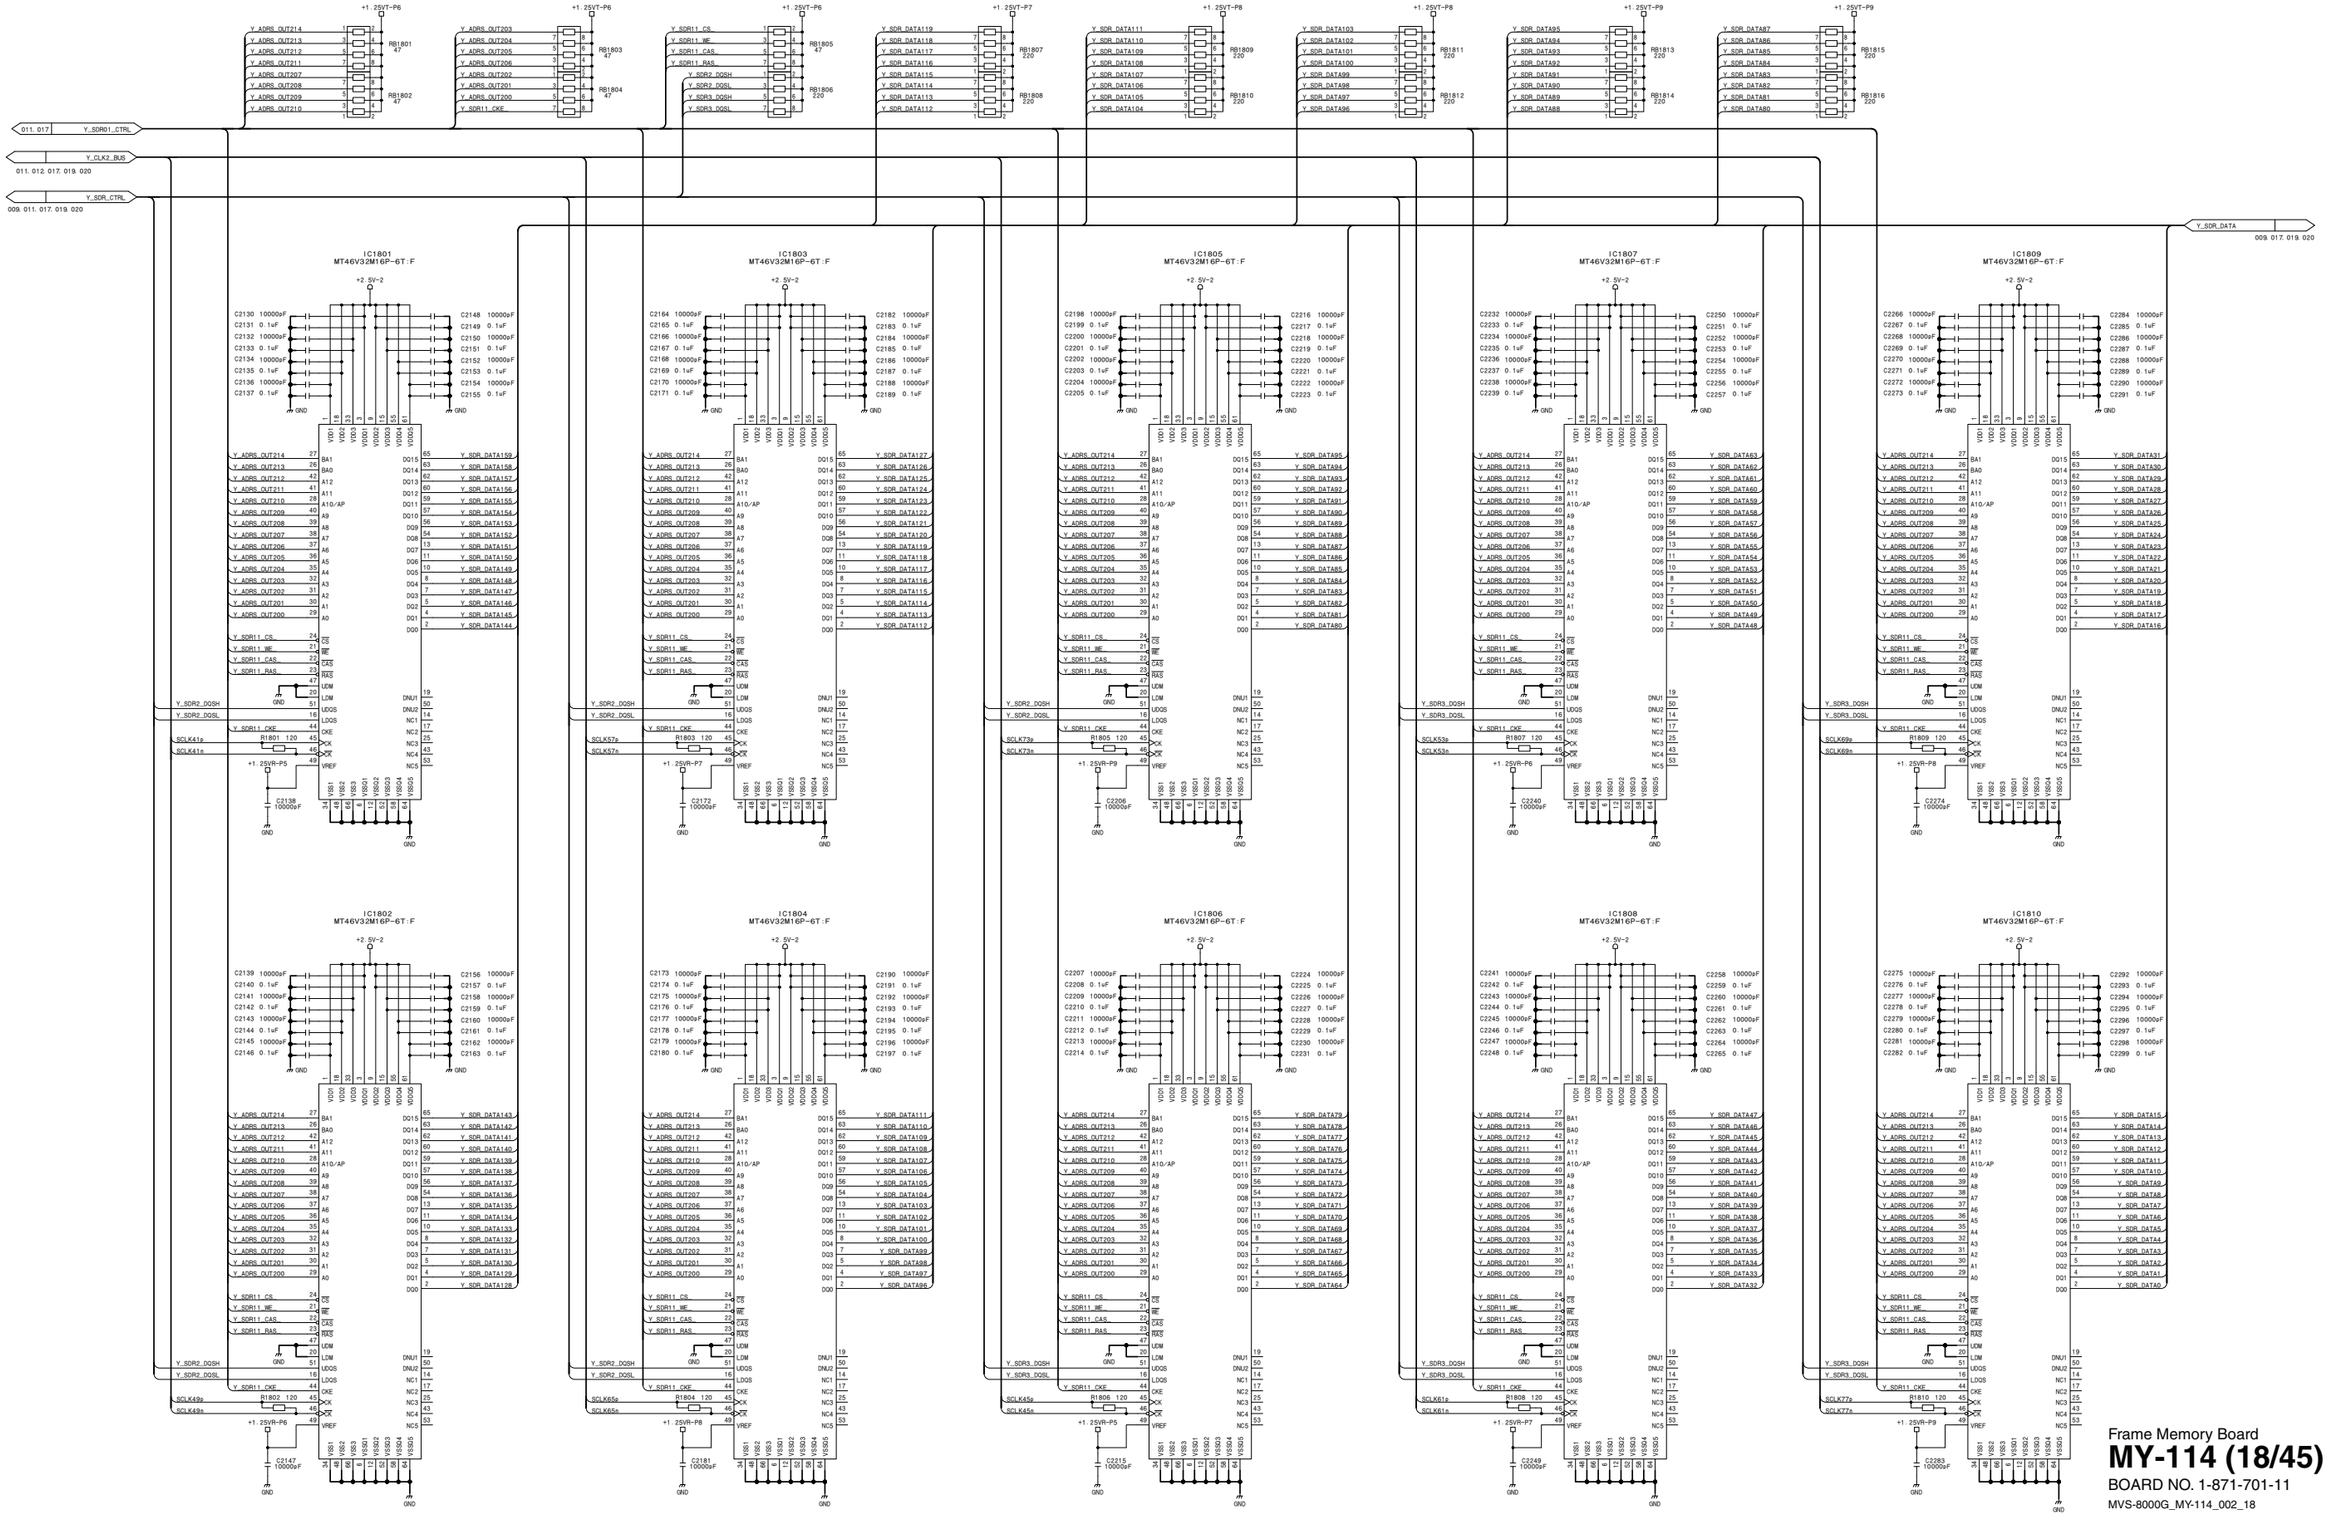


Frame Memory Board

MY-114 (18/45)


BOARD NO. 1-871-701-11

MVS-8000G_MY-114_002_18

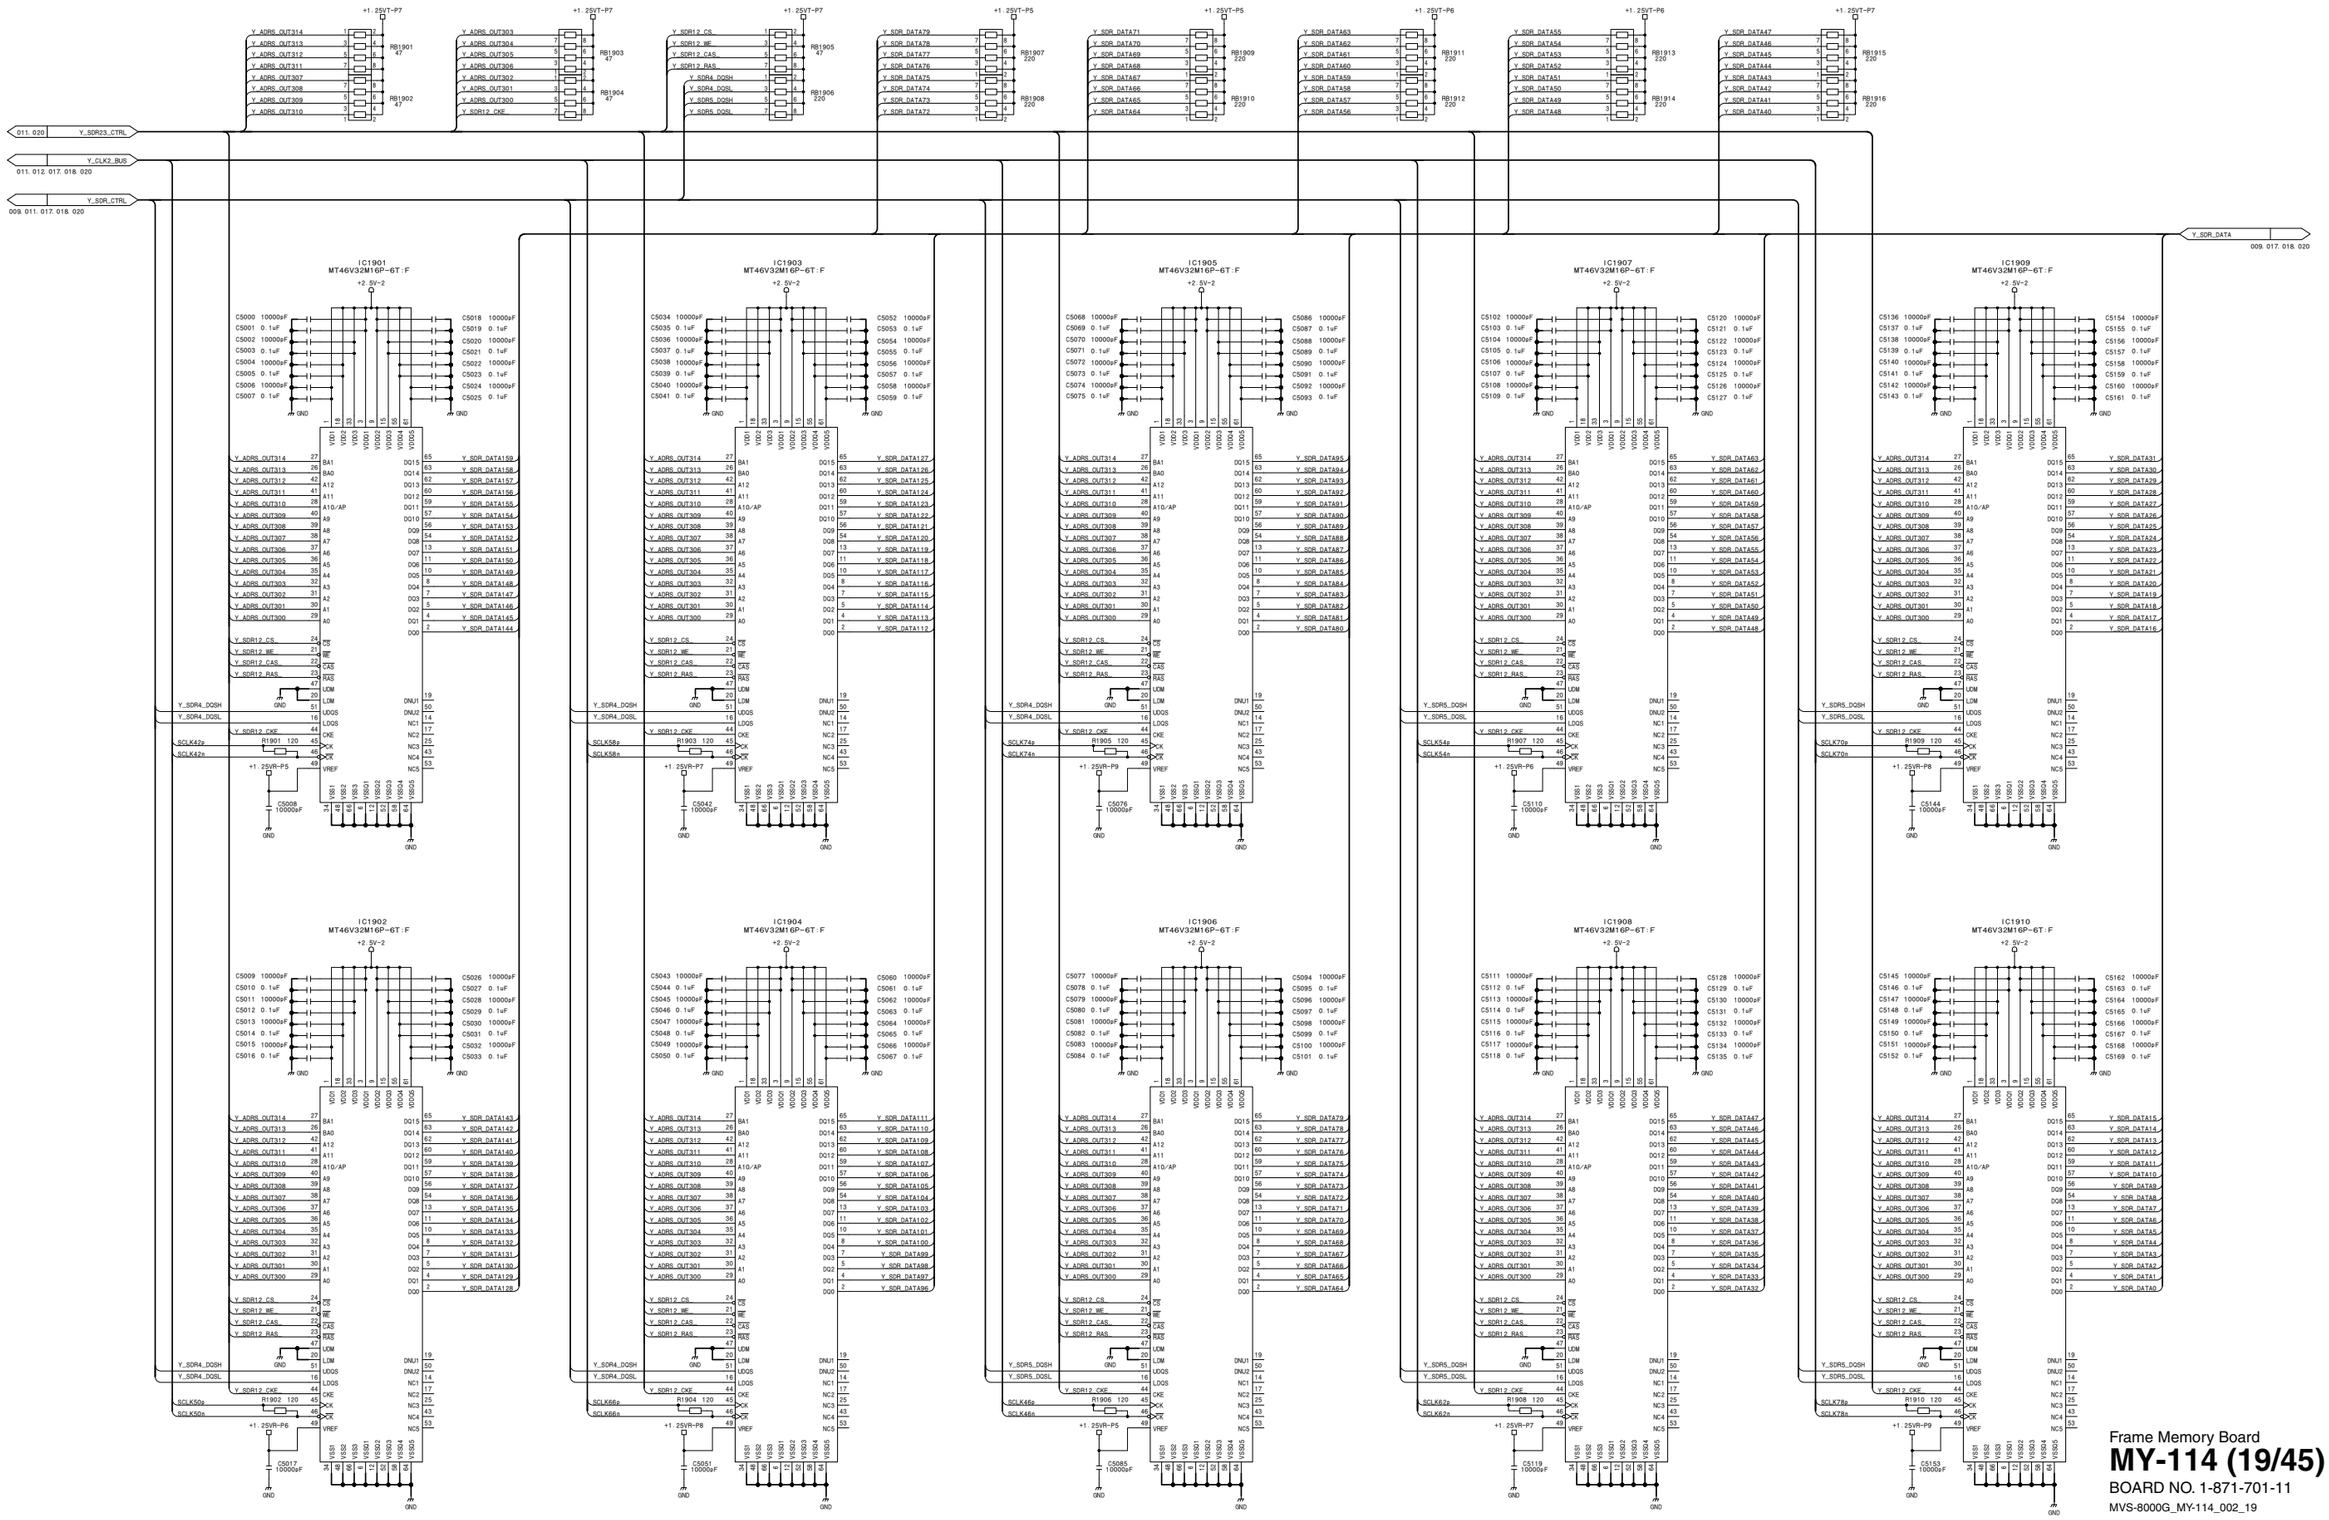

Frame Memory Board
MY-114 (19/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_19

MY-114 (20/45)
SUFFIX: -11

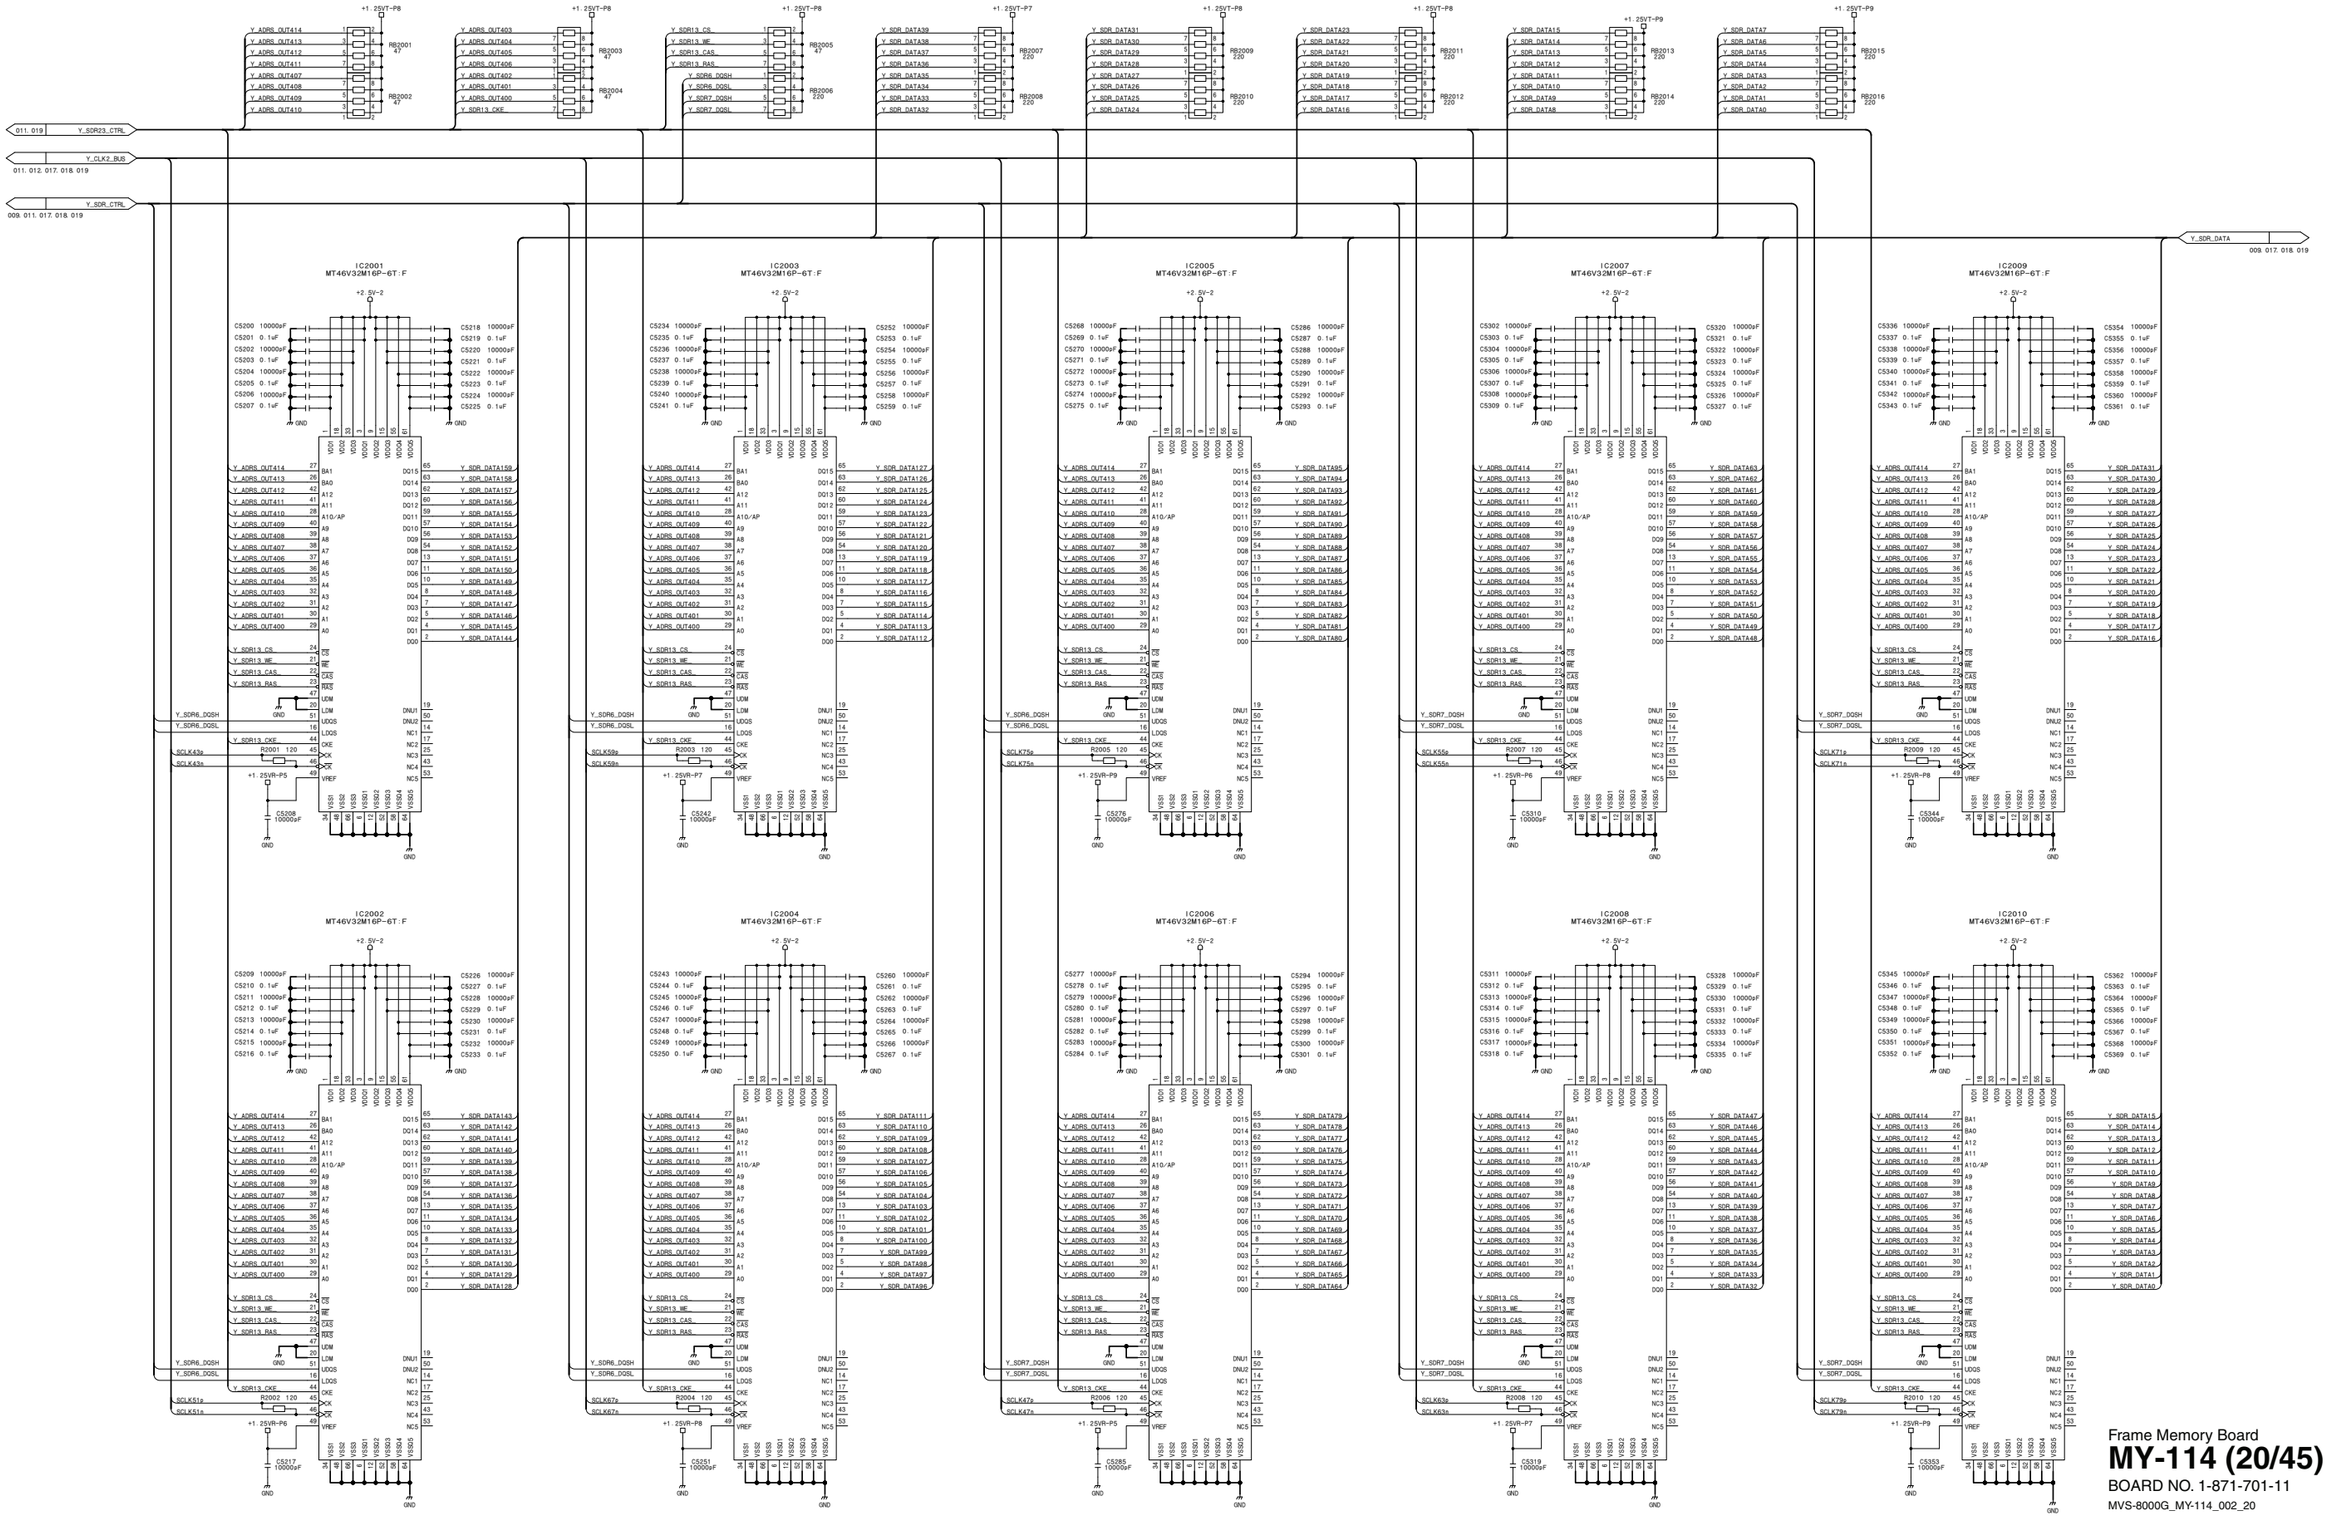



4-212 4-212

Frame Memory Board
MY-114 (20/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_20

MVS-6000 MM


MY-114 (21/45)
SUFFIX: -11

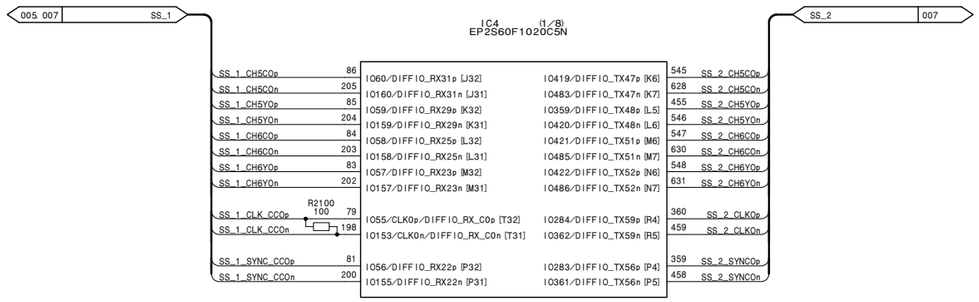

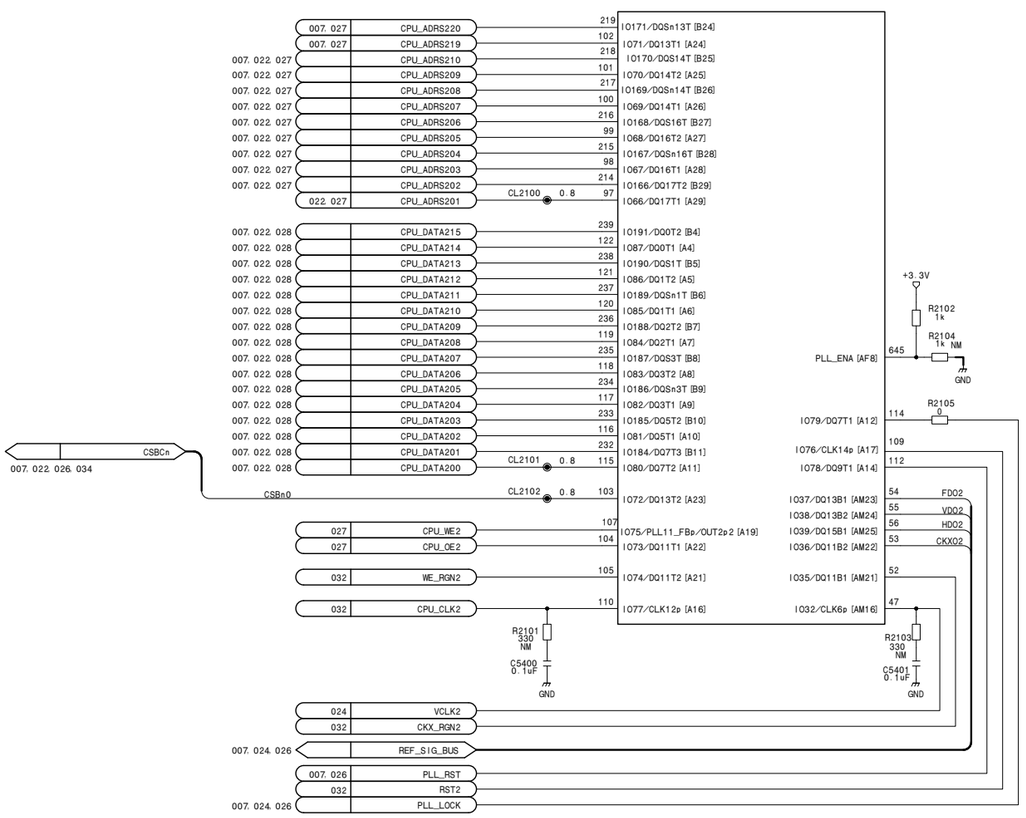



Frame Memory Board
MY-114 (21/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_21

MY-114 (22/45)
SUFFIX: -11

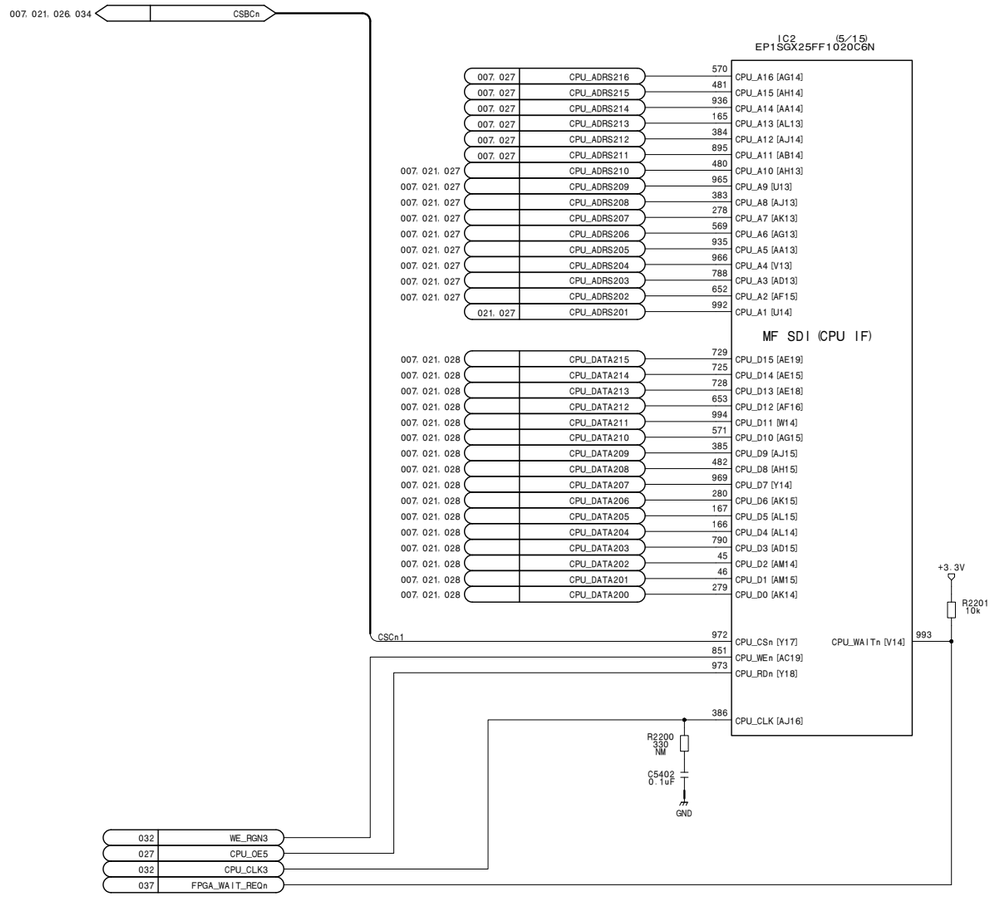

Frame Memory Board
MY-114 (22/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_22

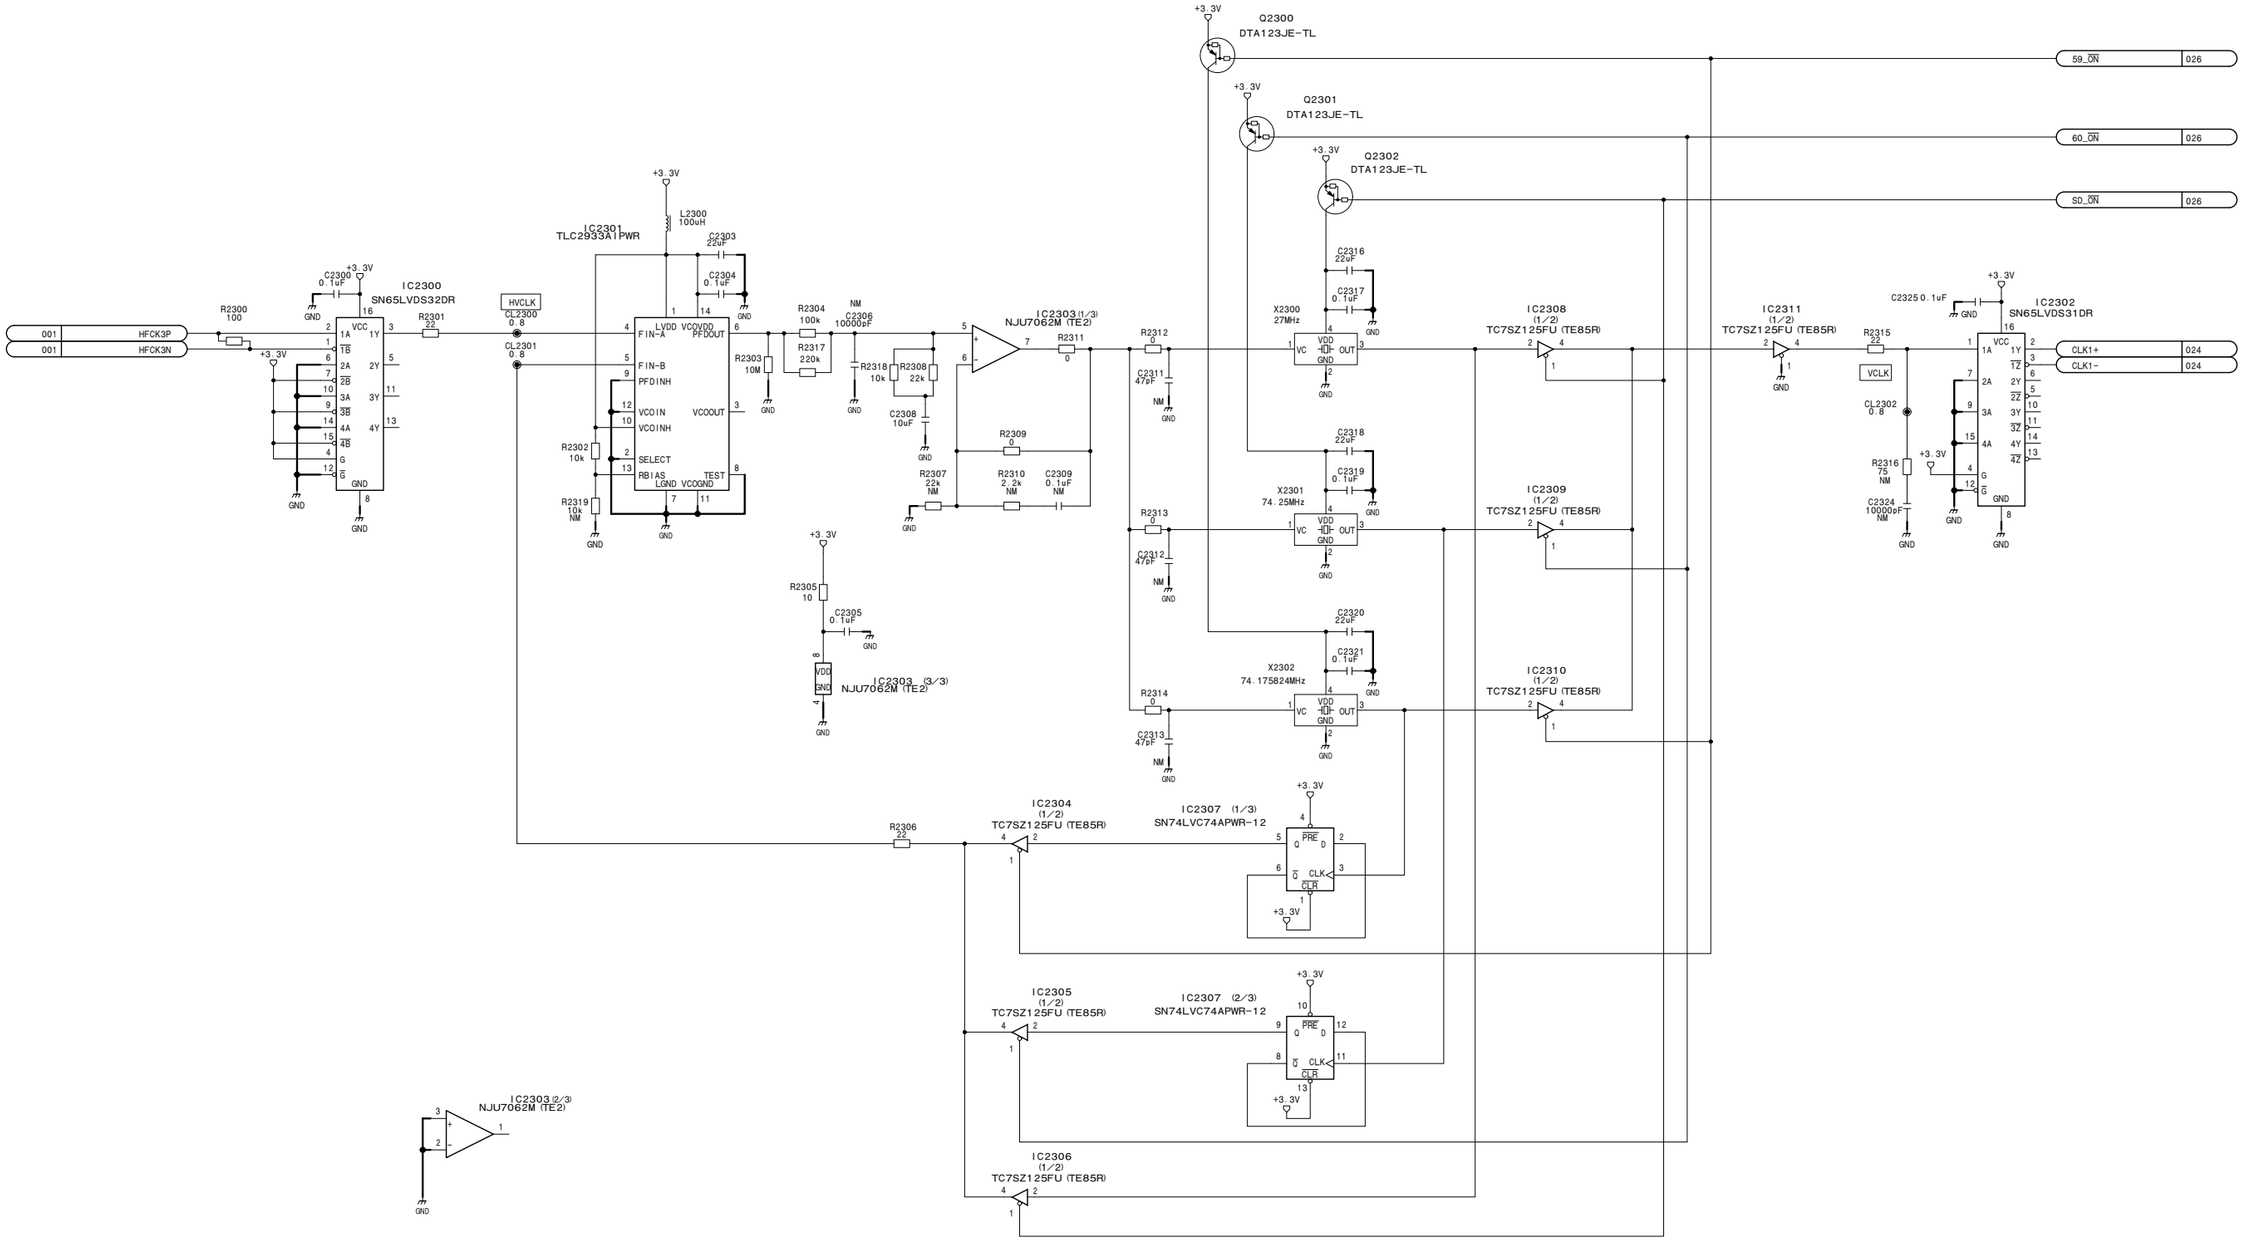


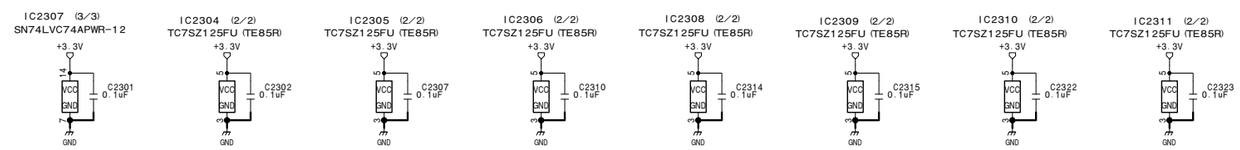

Frame Memory Board
MY-114 (23/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_23


MVS-6000 MM

MY-114 (24/45)
SUFFIX: -11

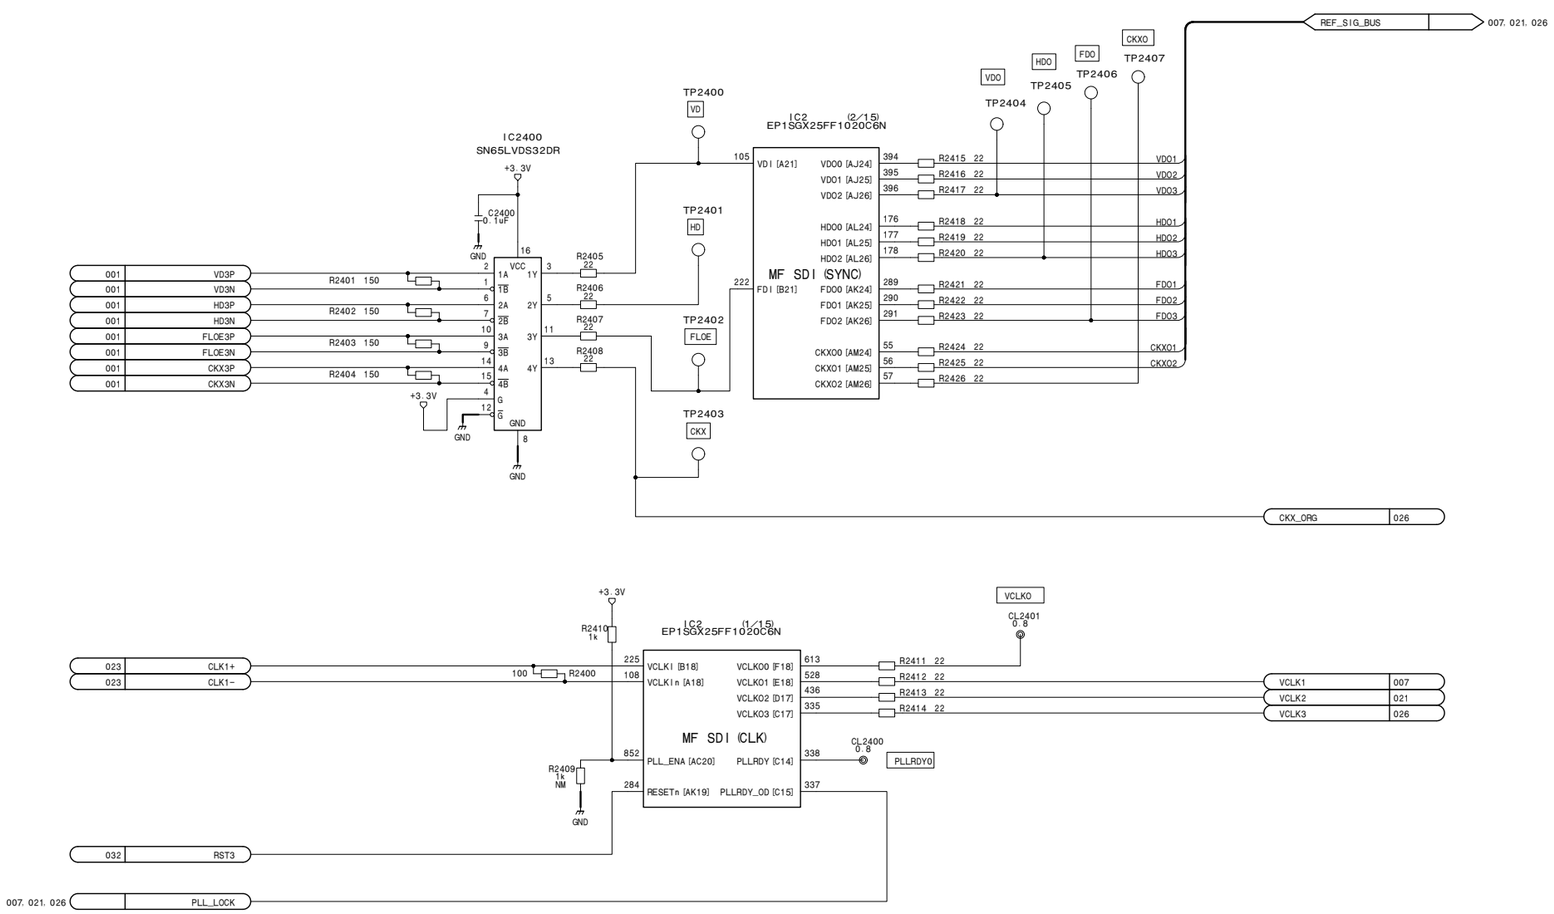


Frame Memory Board
MY-114 (24/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_24

MY-114 (25/45)
SUFFIX: -11

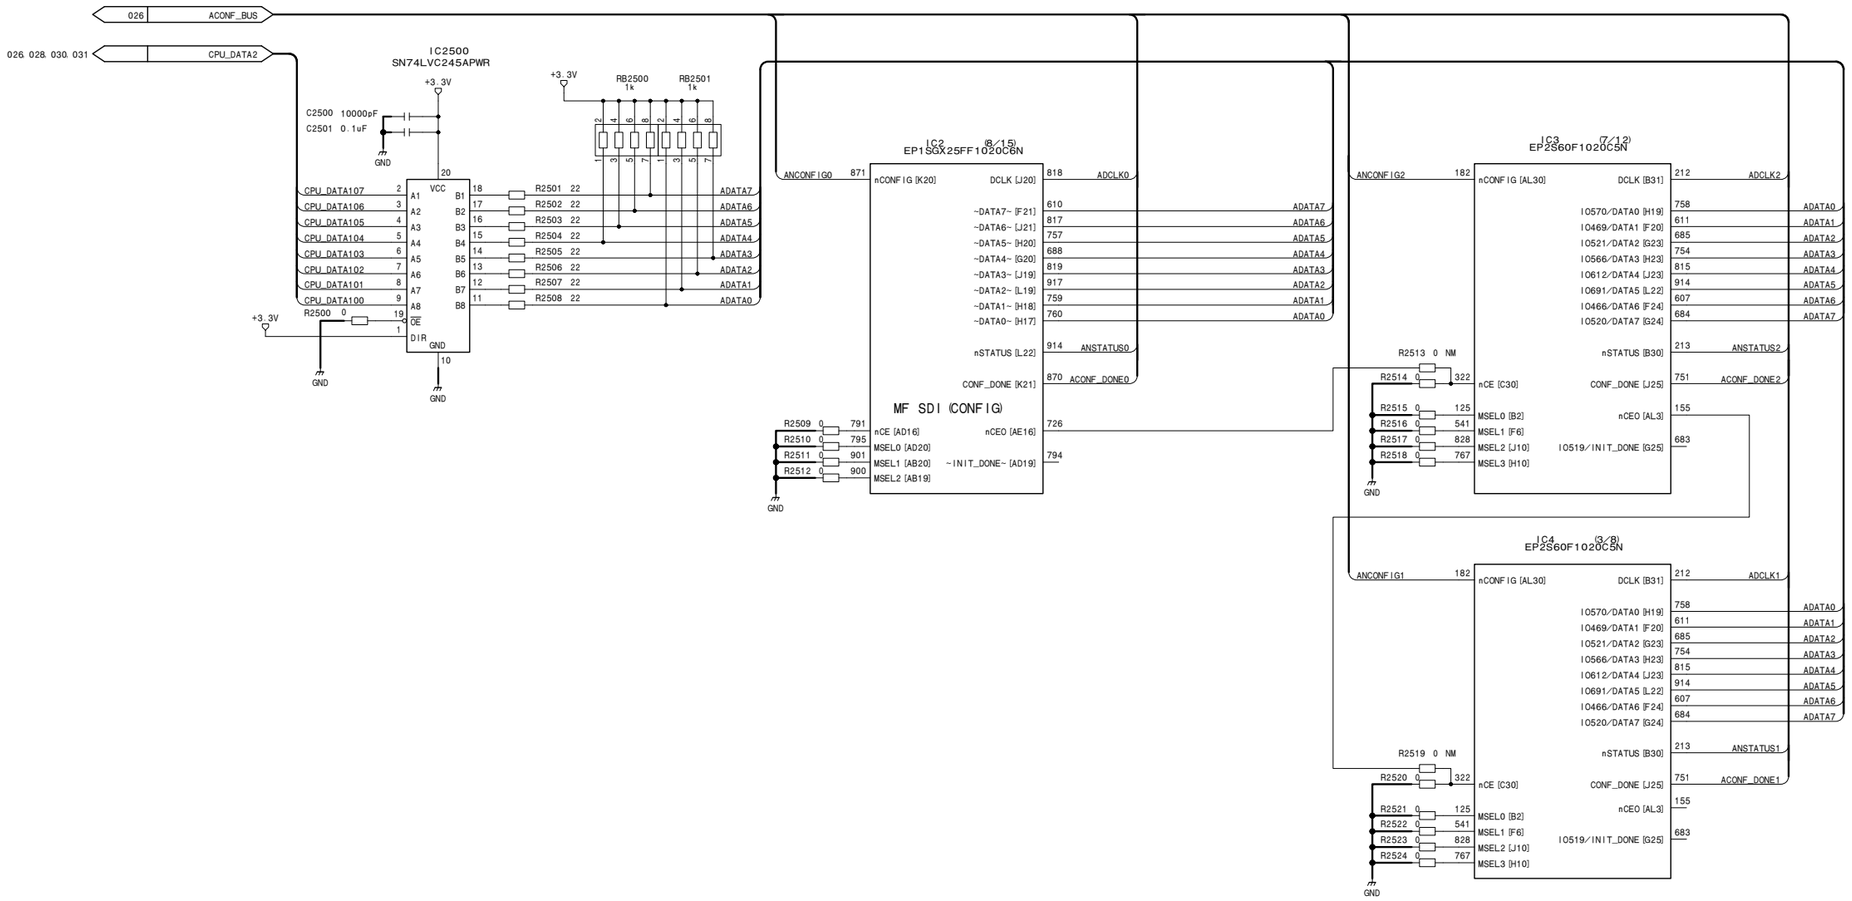


Frame Memory Board
MY-114 (25/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_25

4-217

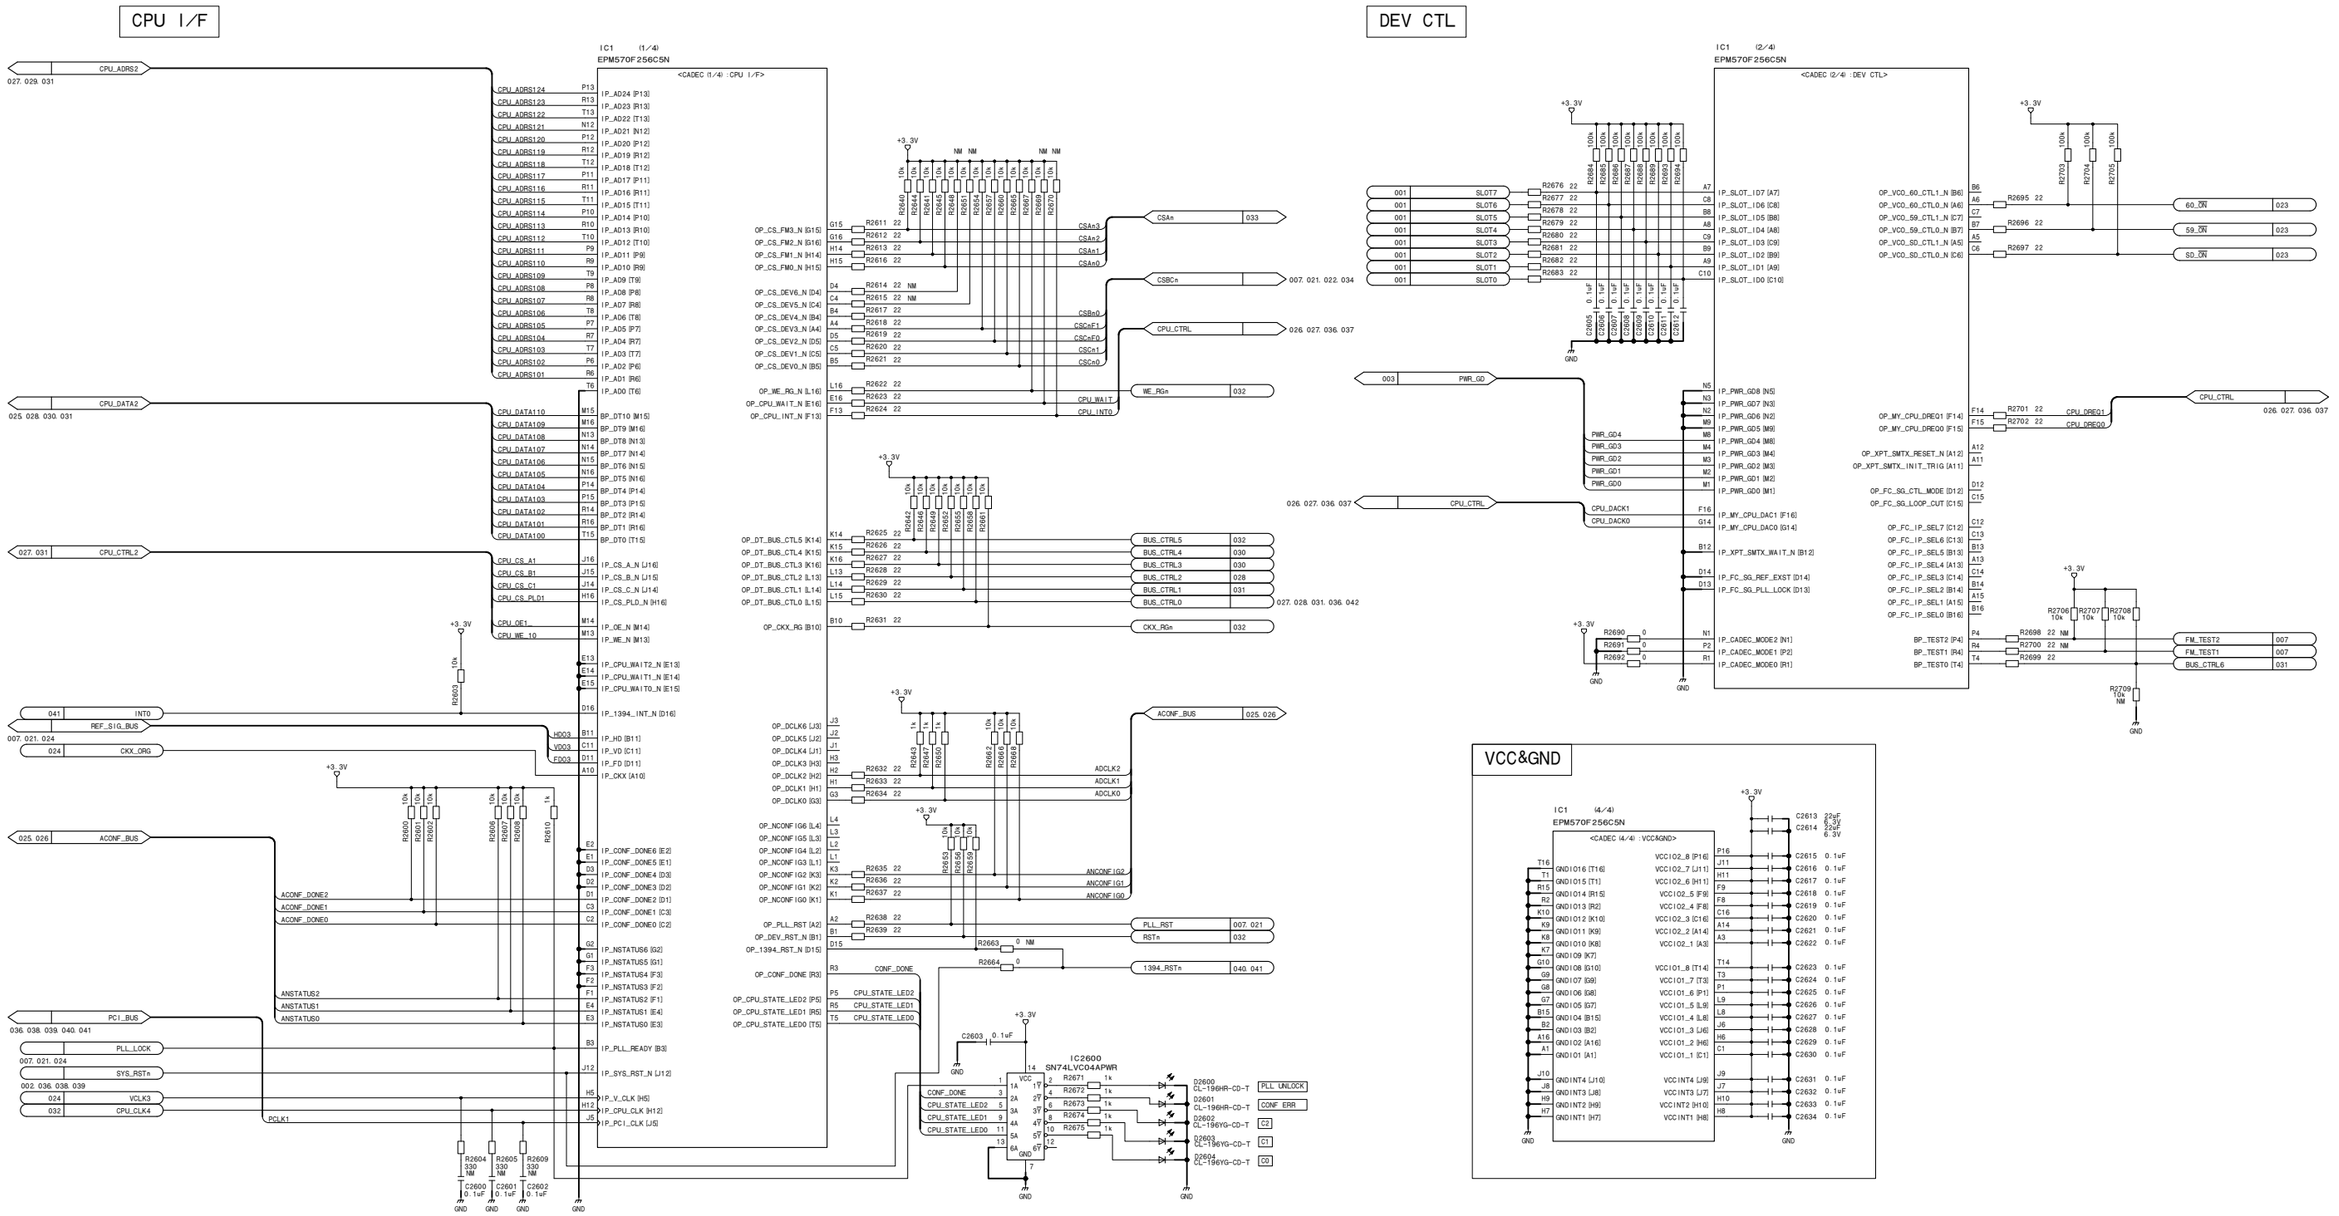


Frame Memory Board
MY-114 (26/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_26

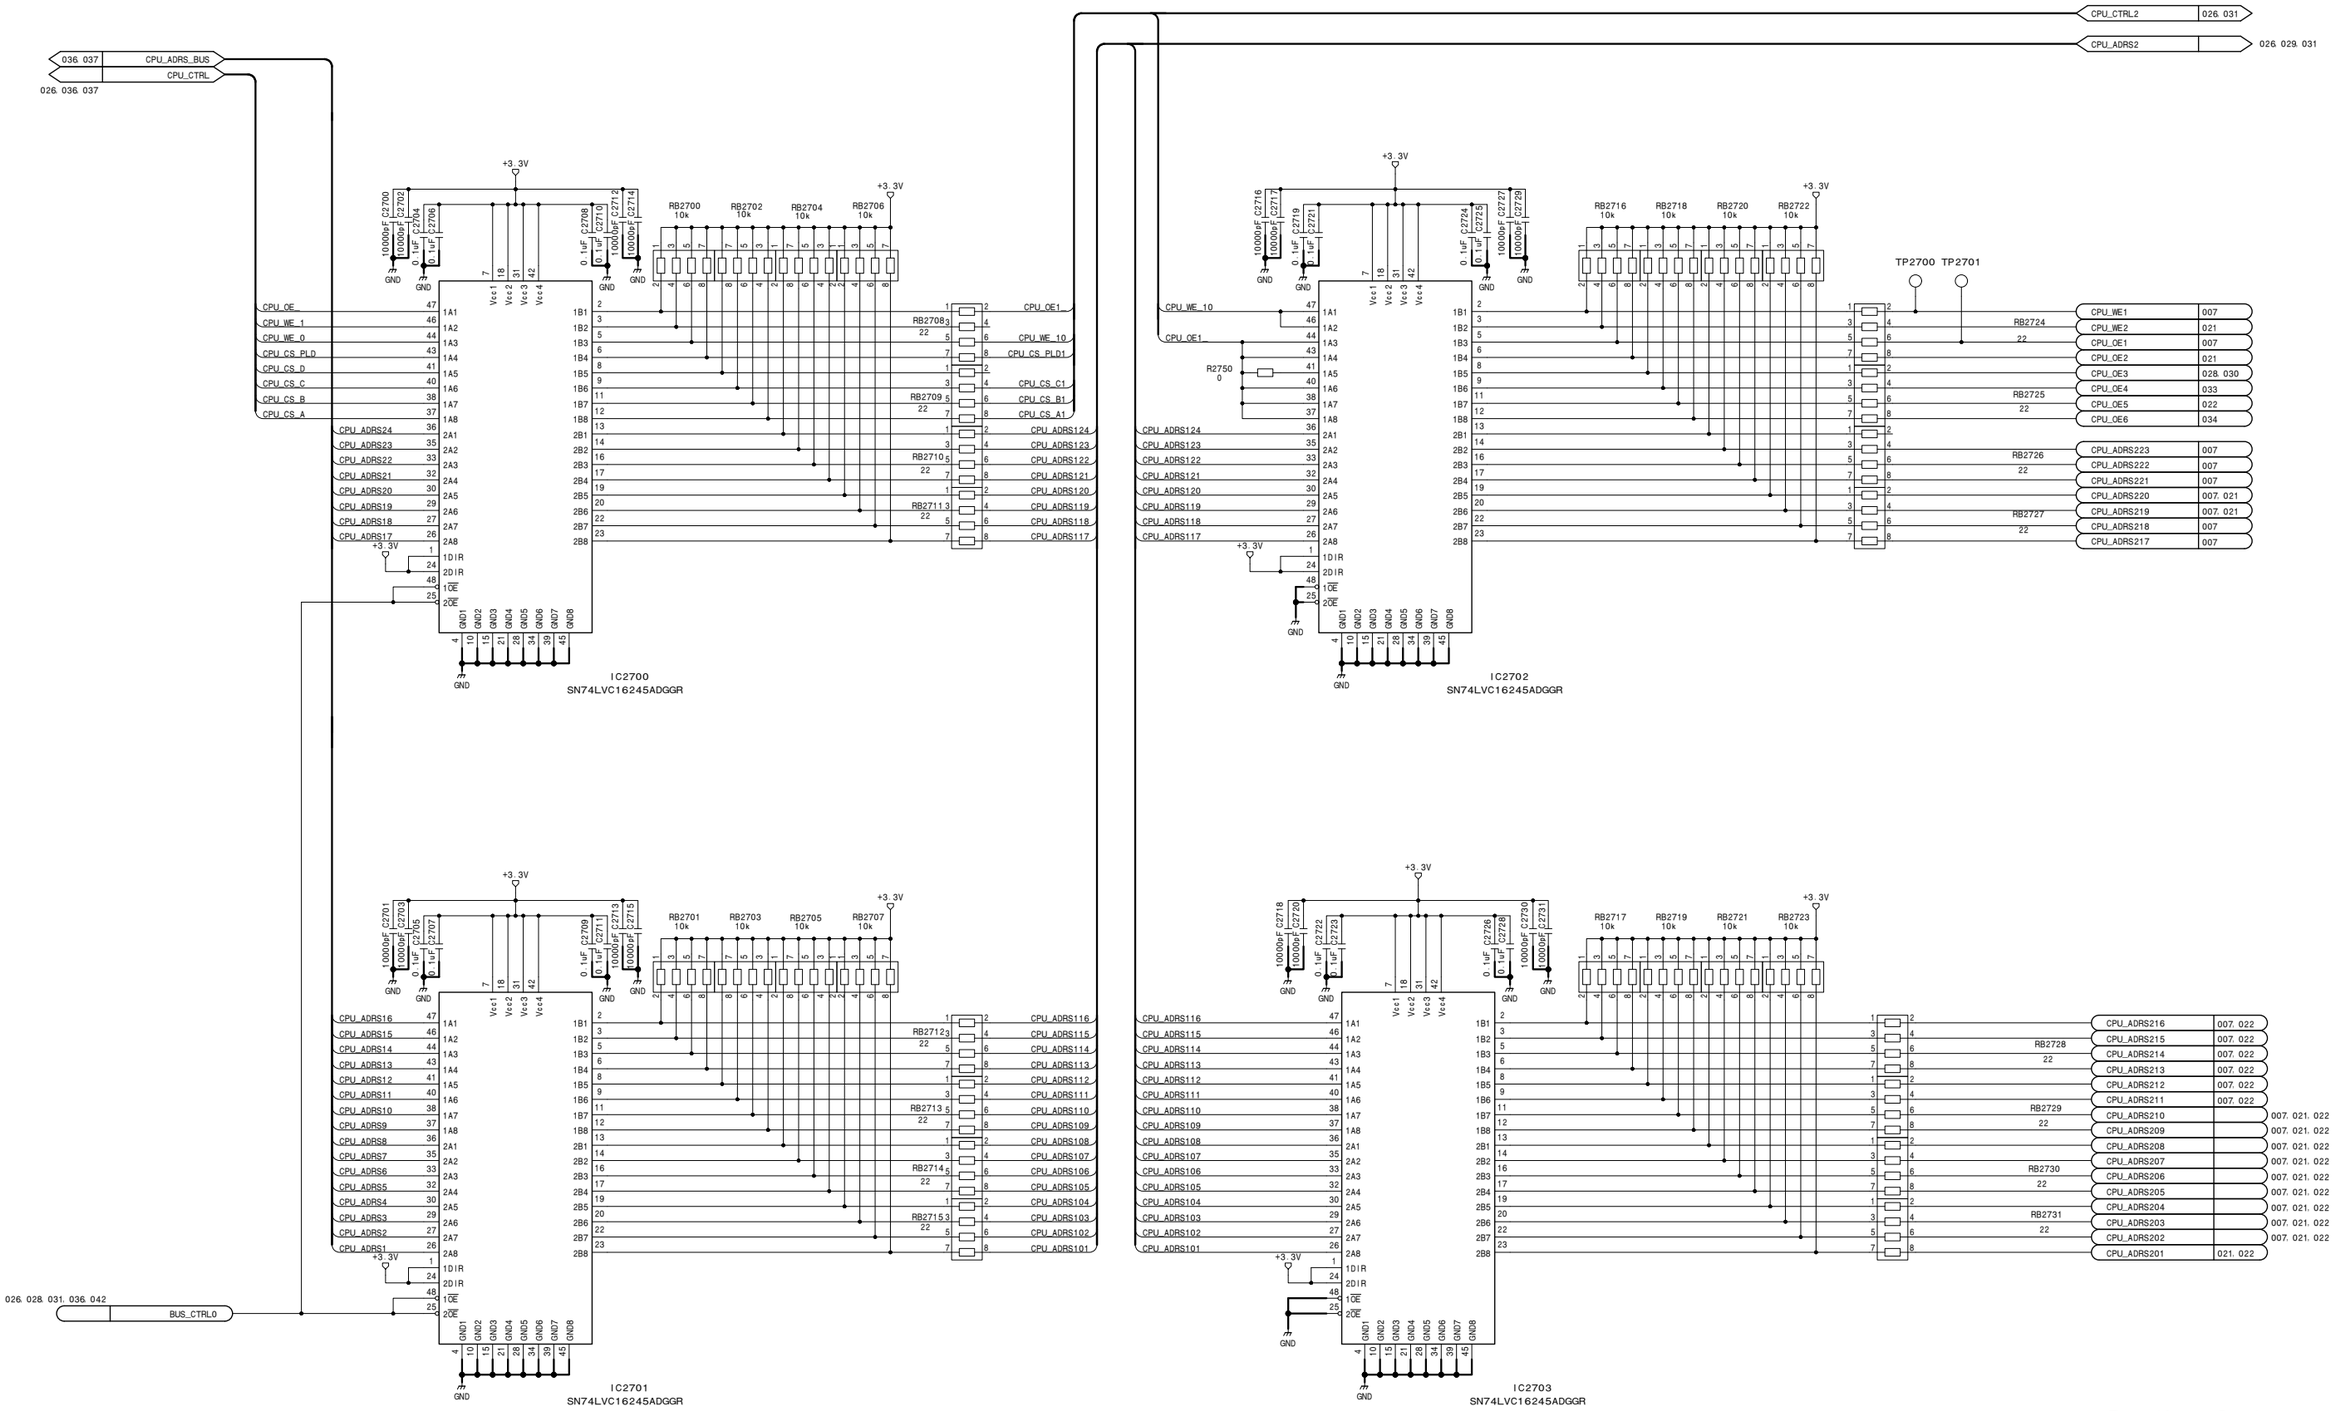


Frame Memory Board
MY-114 (27/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_27

MY-114 (28/45)
SUFFIX: -11

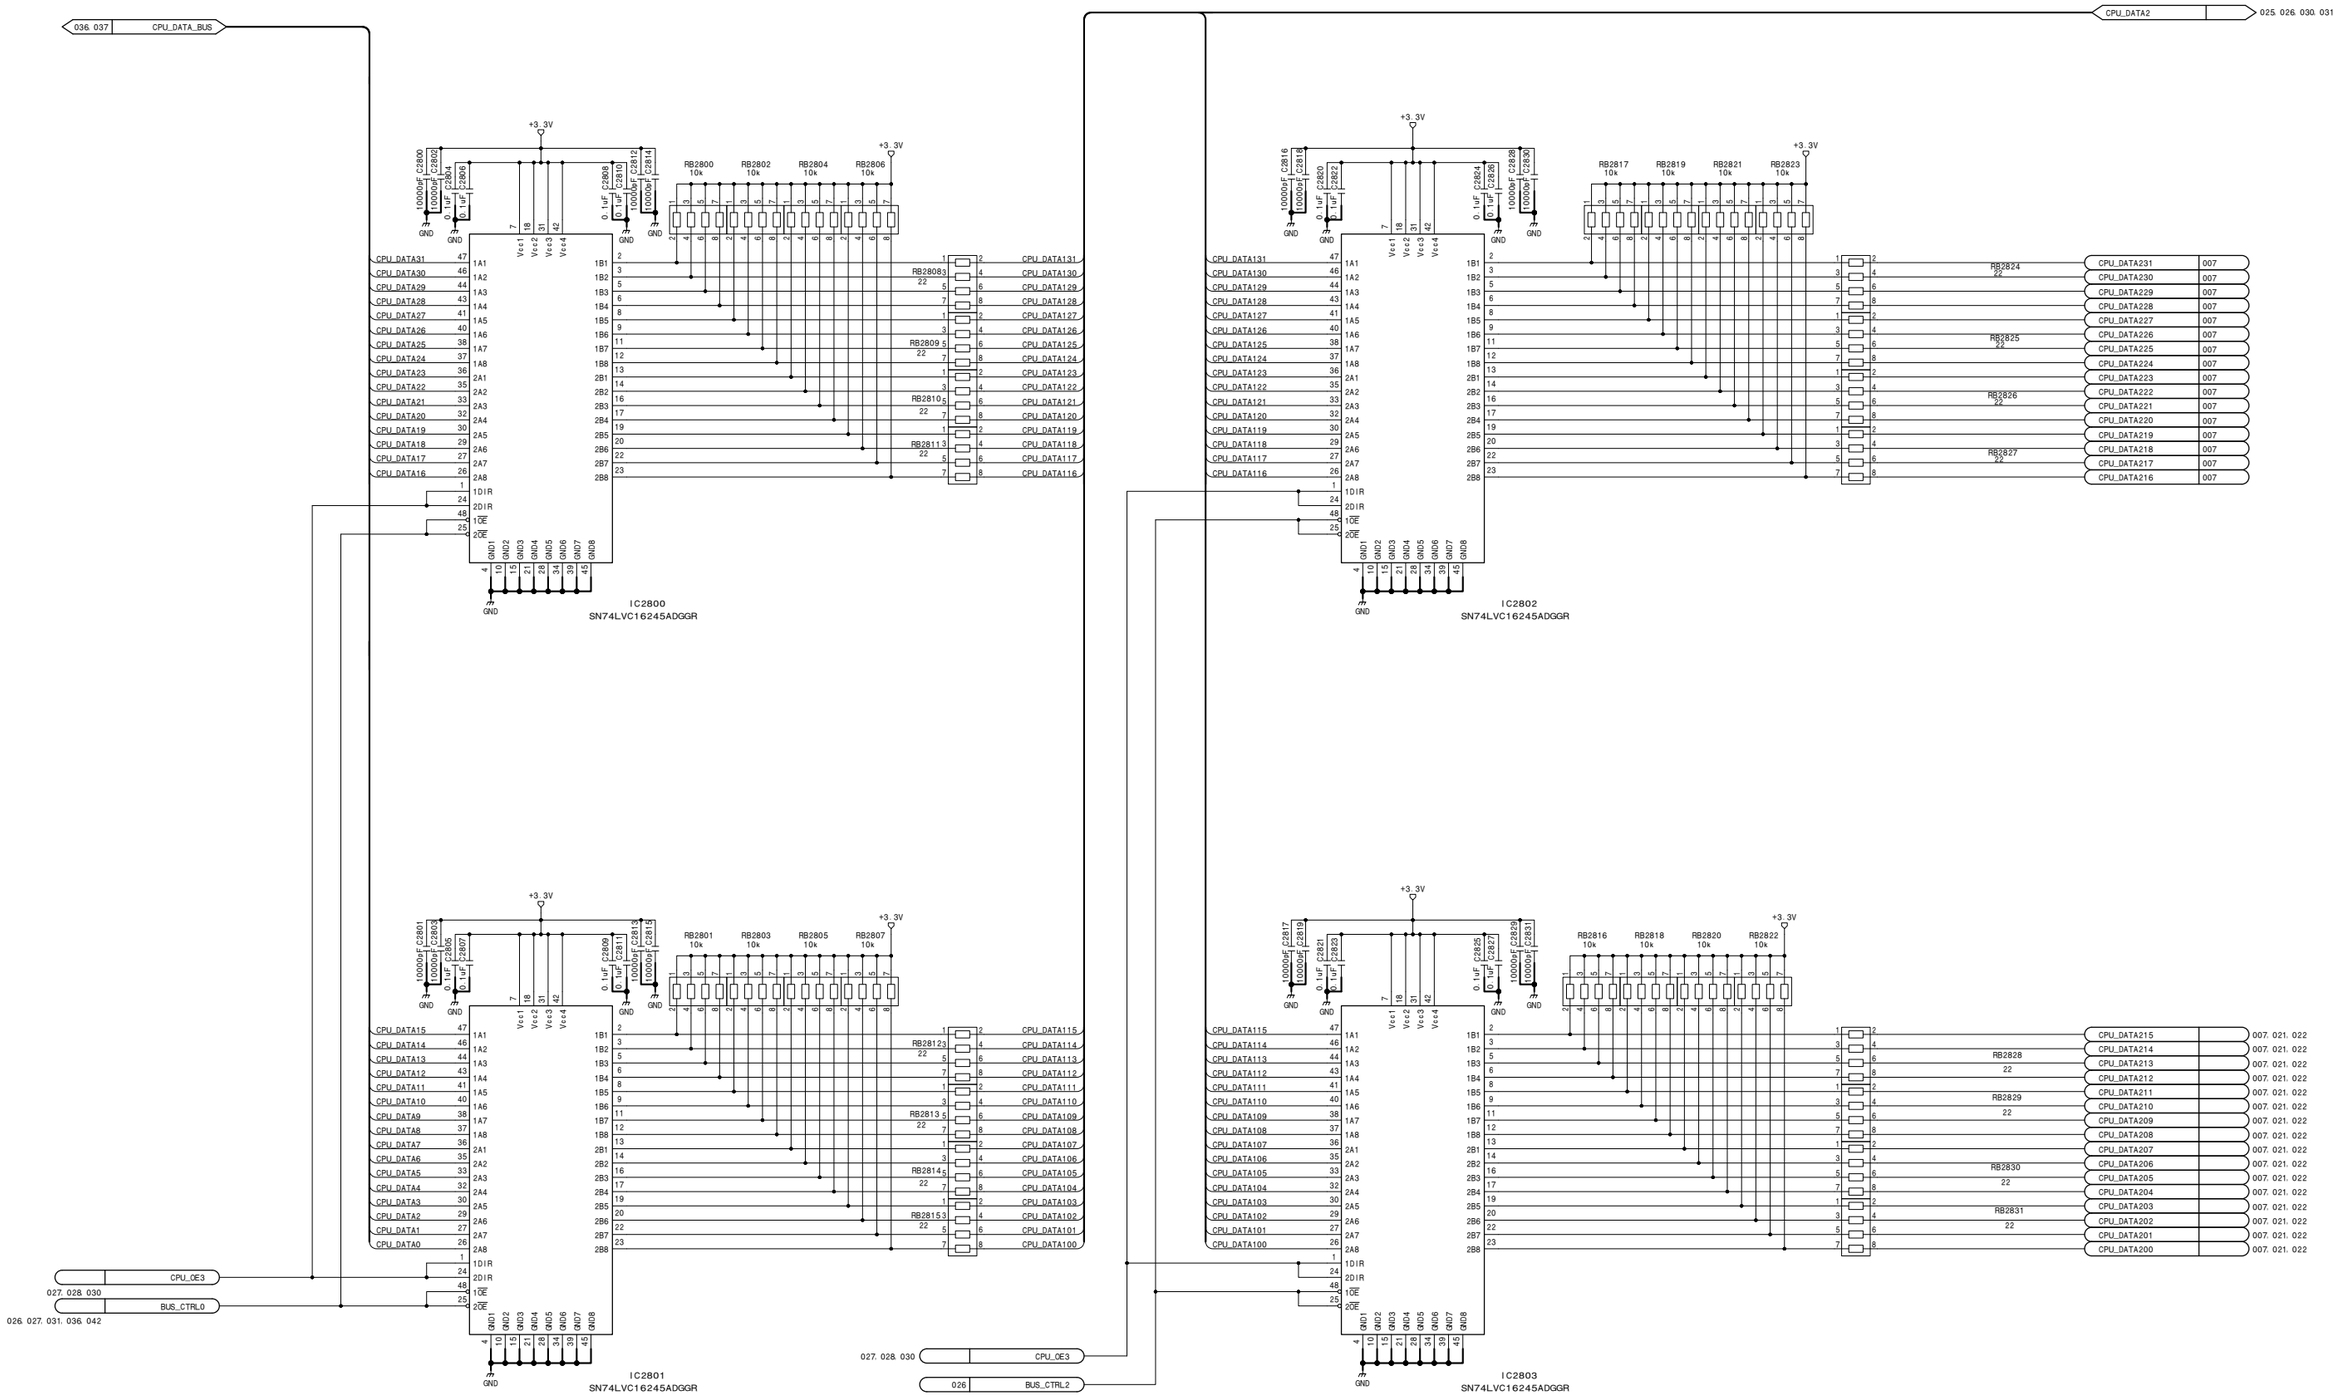


Frame Memory Board
MY-114 (28/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_28

MY-114 (29/45)
SUFFIX: -11

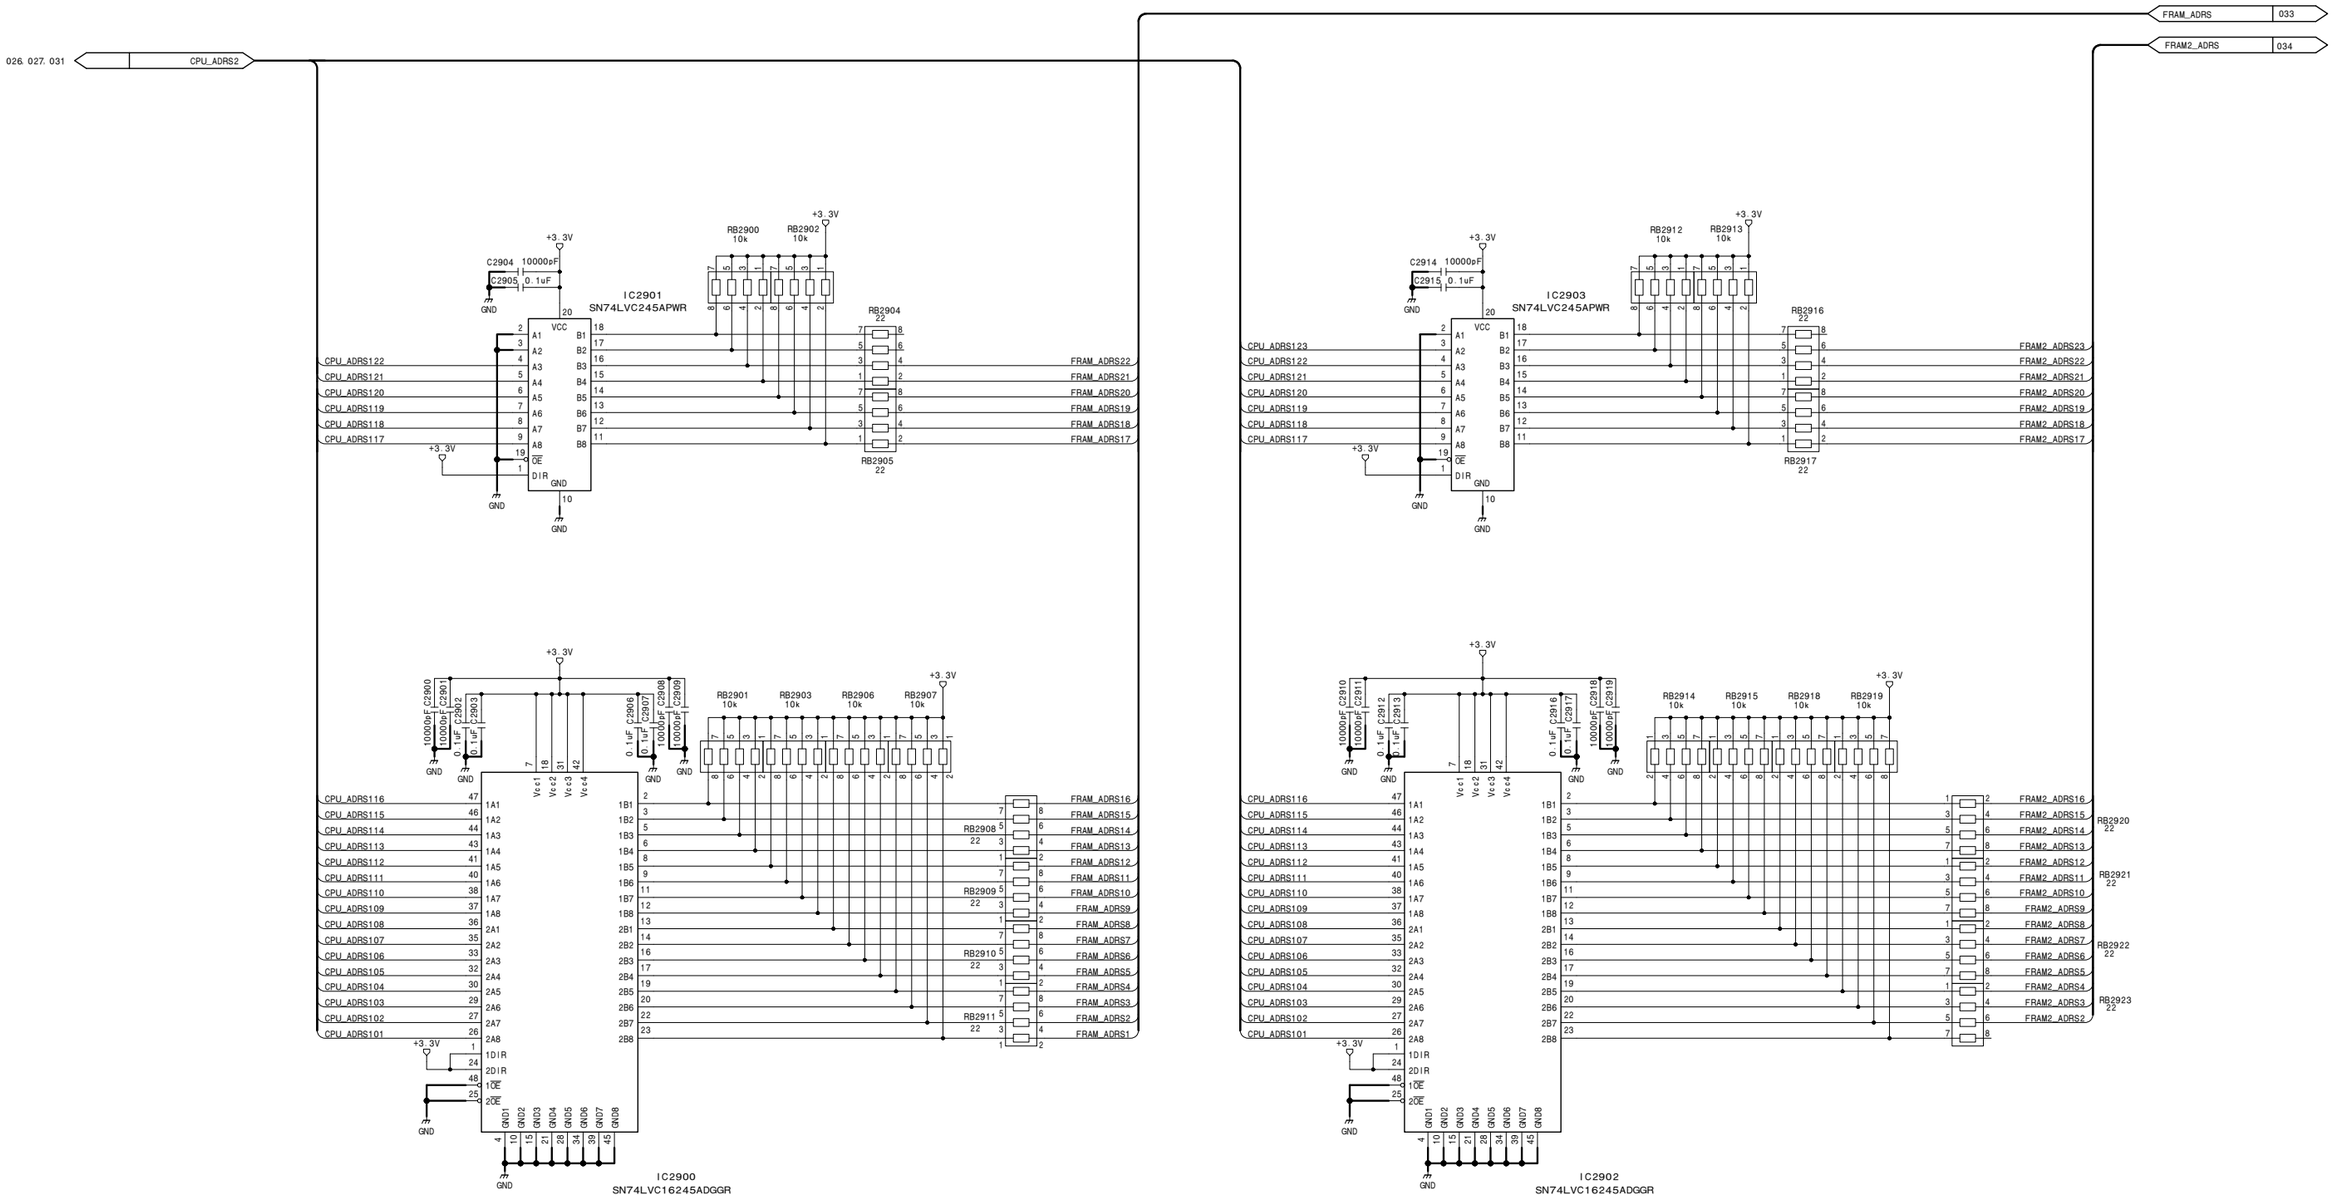


Frame Memory Board
MY-114 (29/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_29

MY-114 (30/45)
SUFFIX: -11

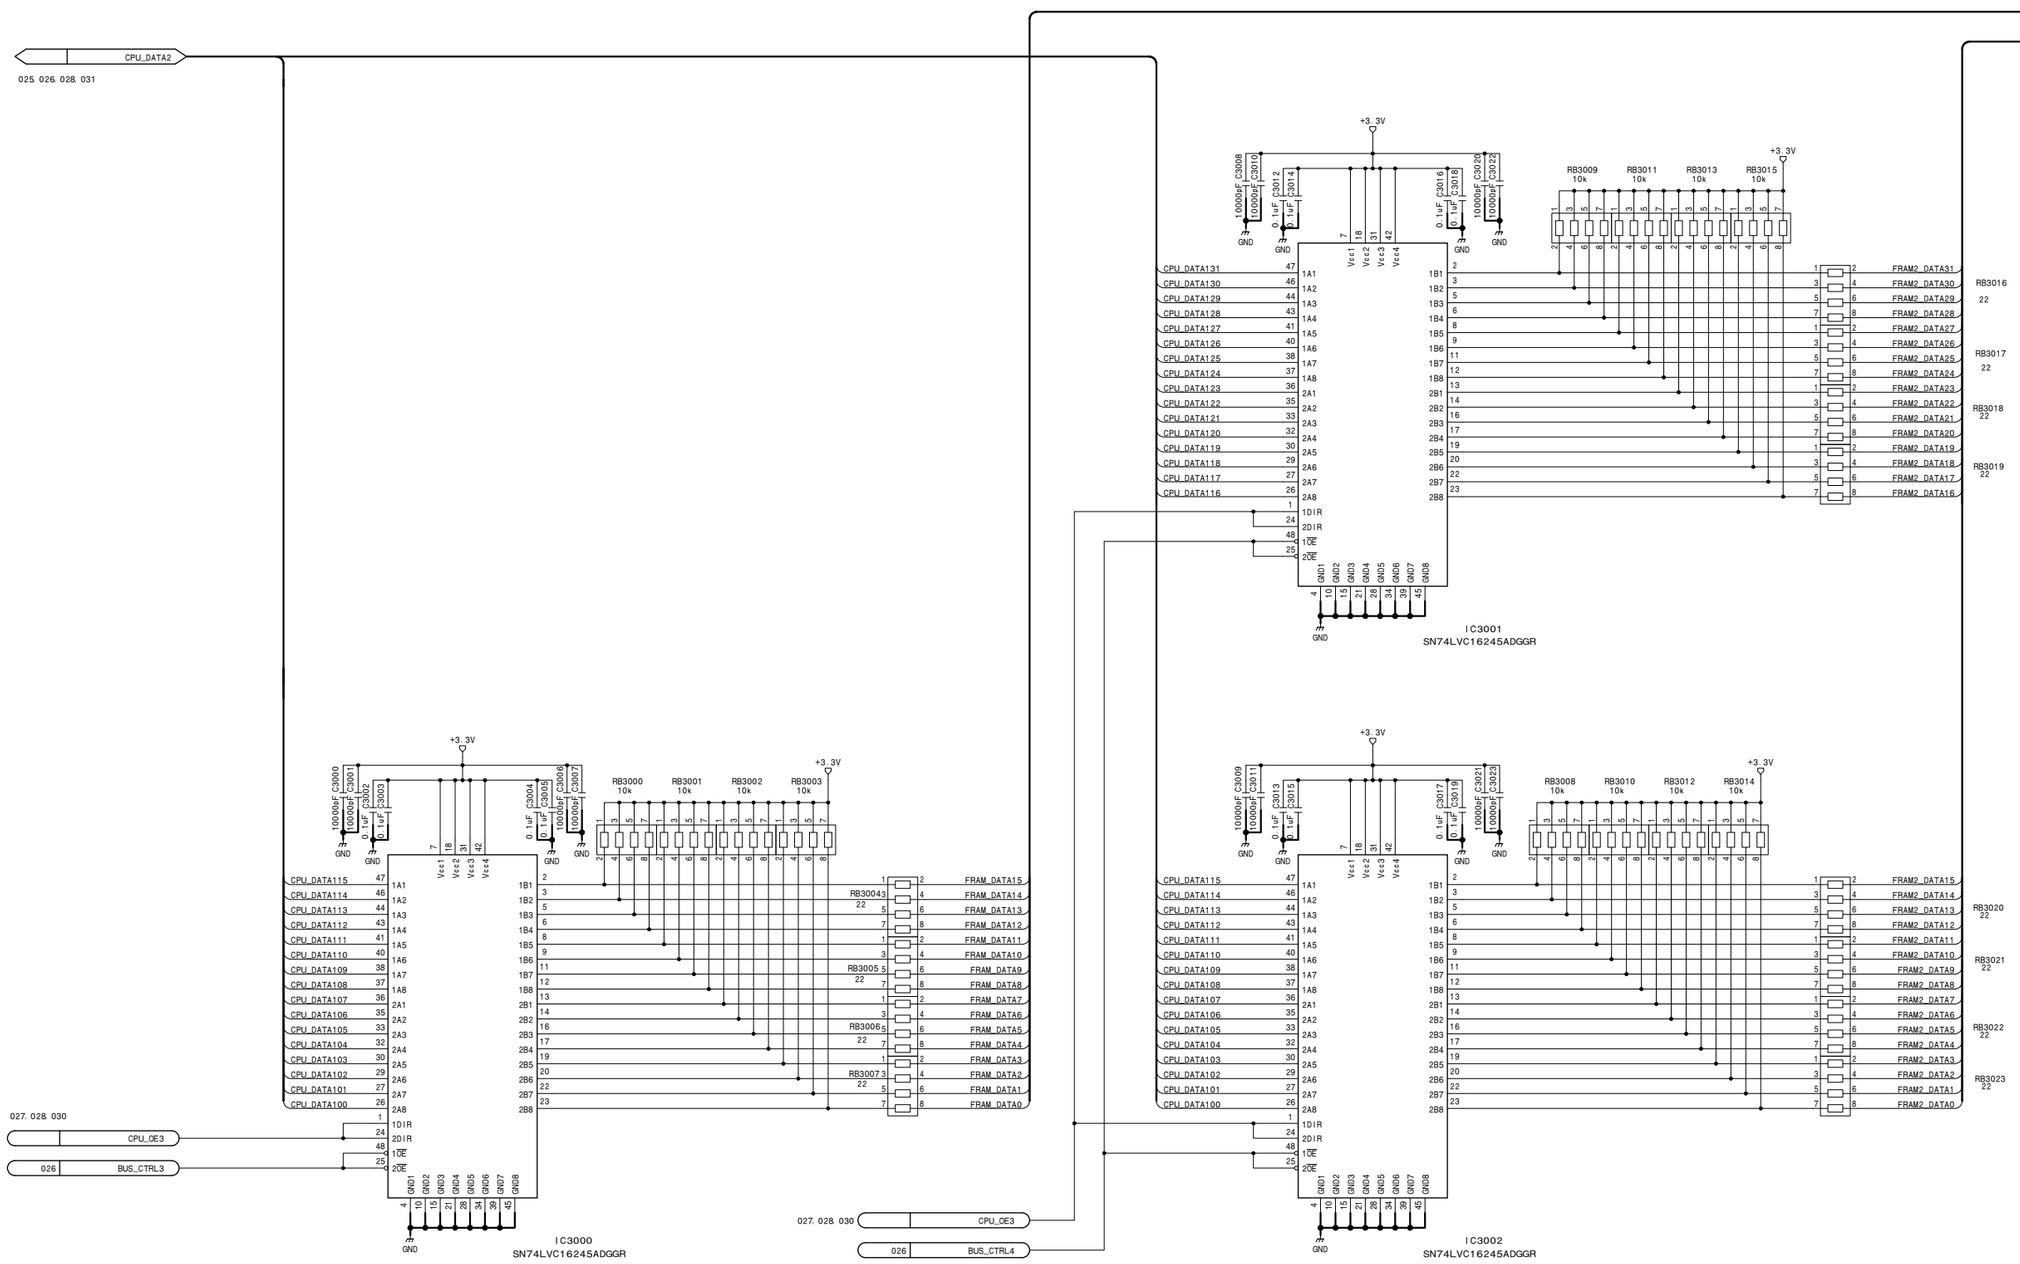


Frame Memory Board
MY-114 (30/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_30

MY-114 (31/45) **SUFFIX: -11**

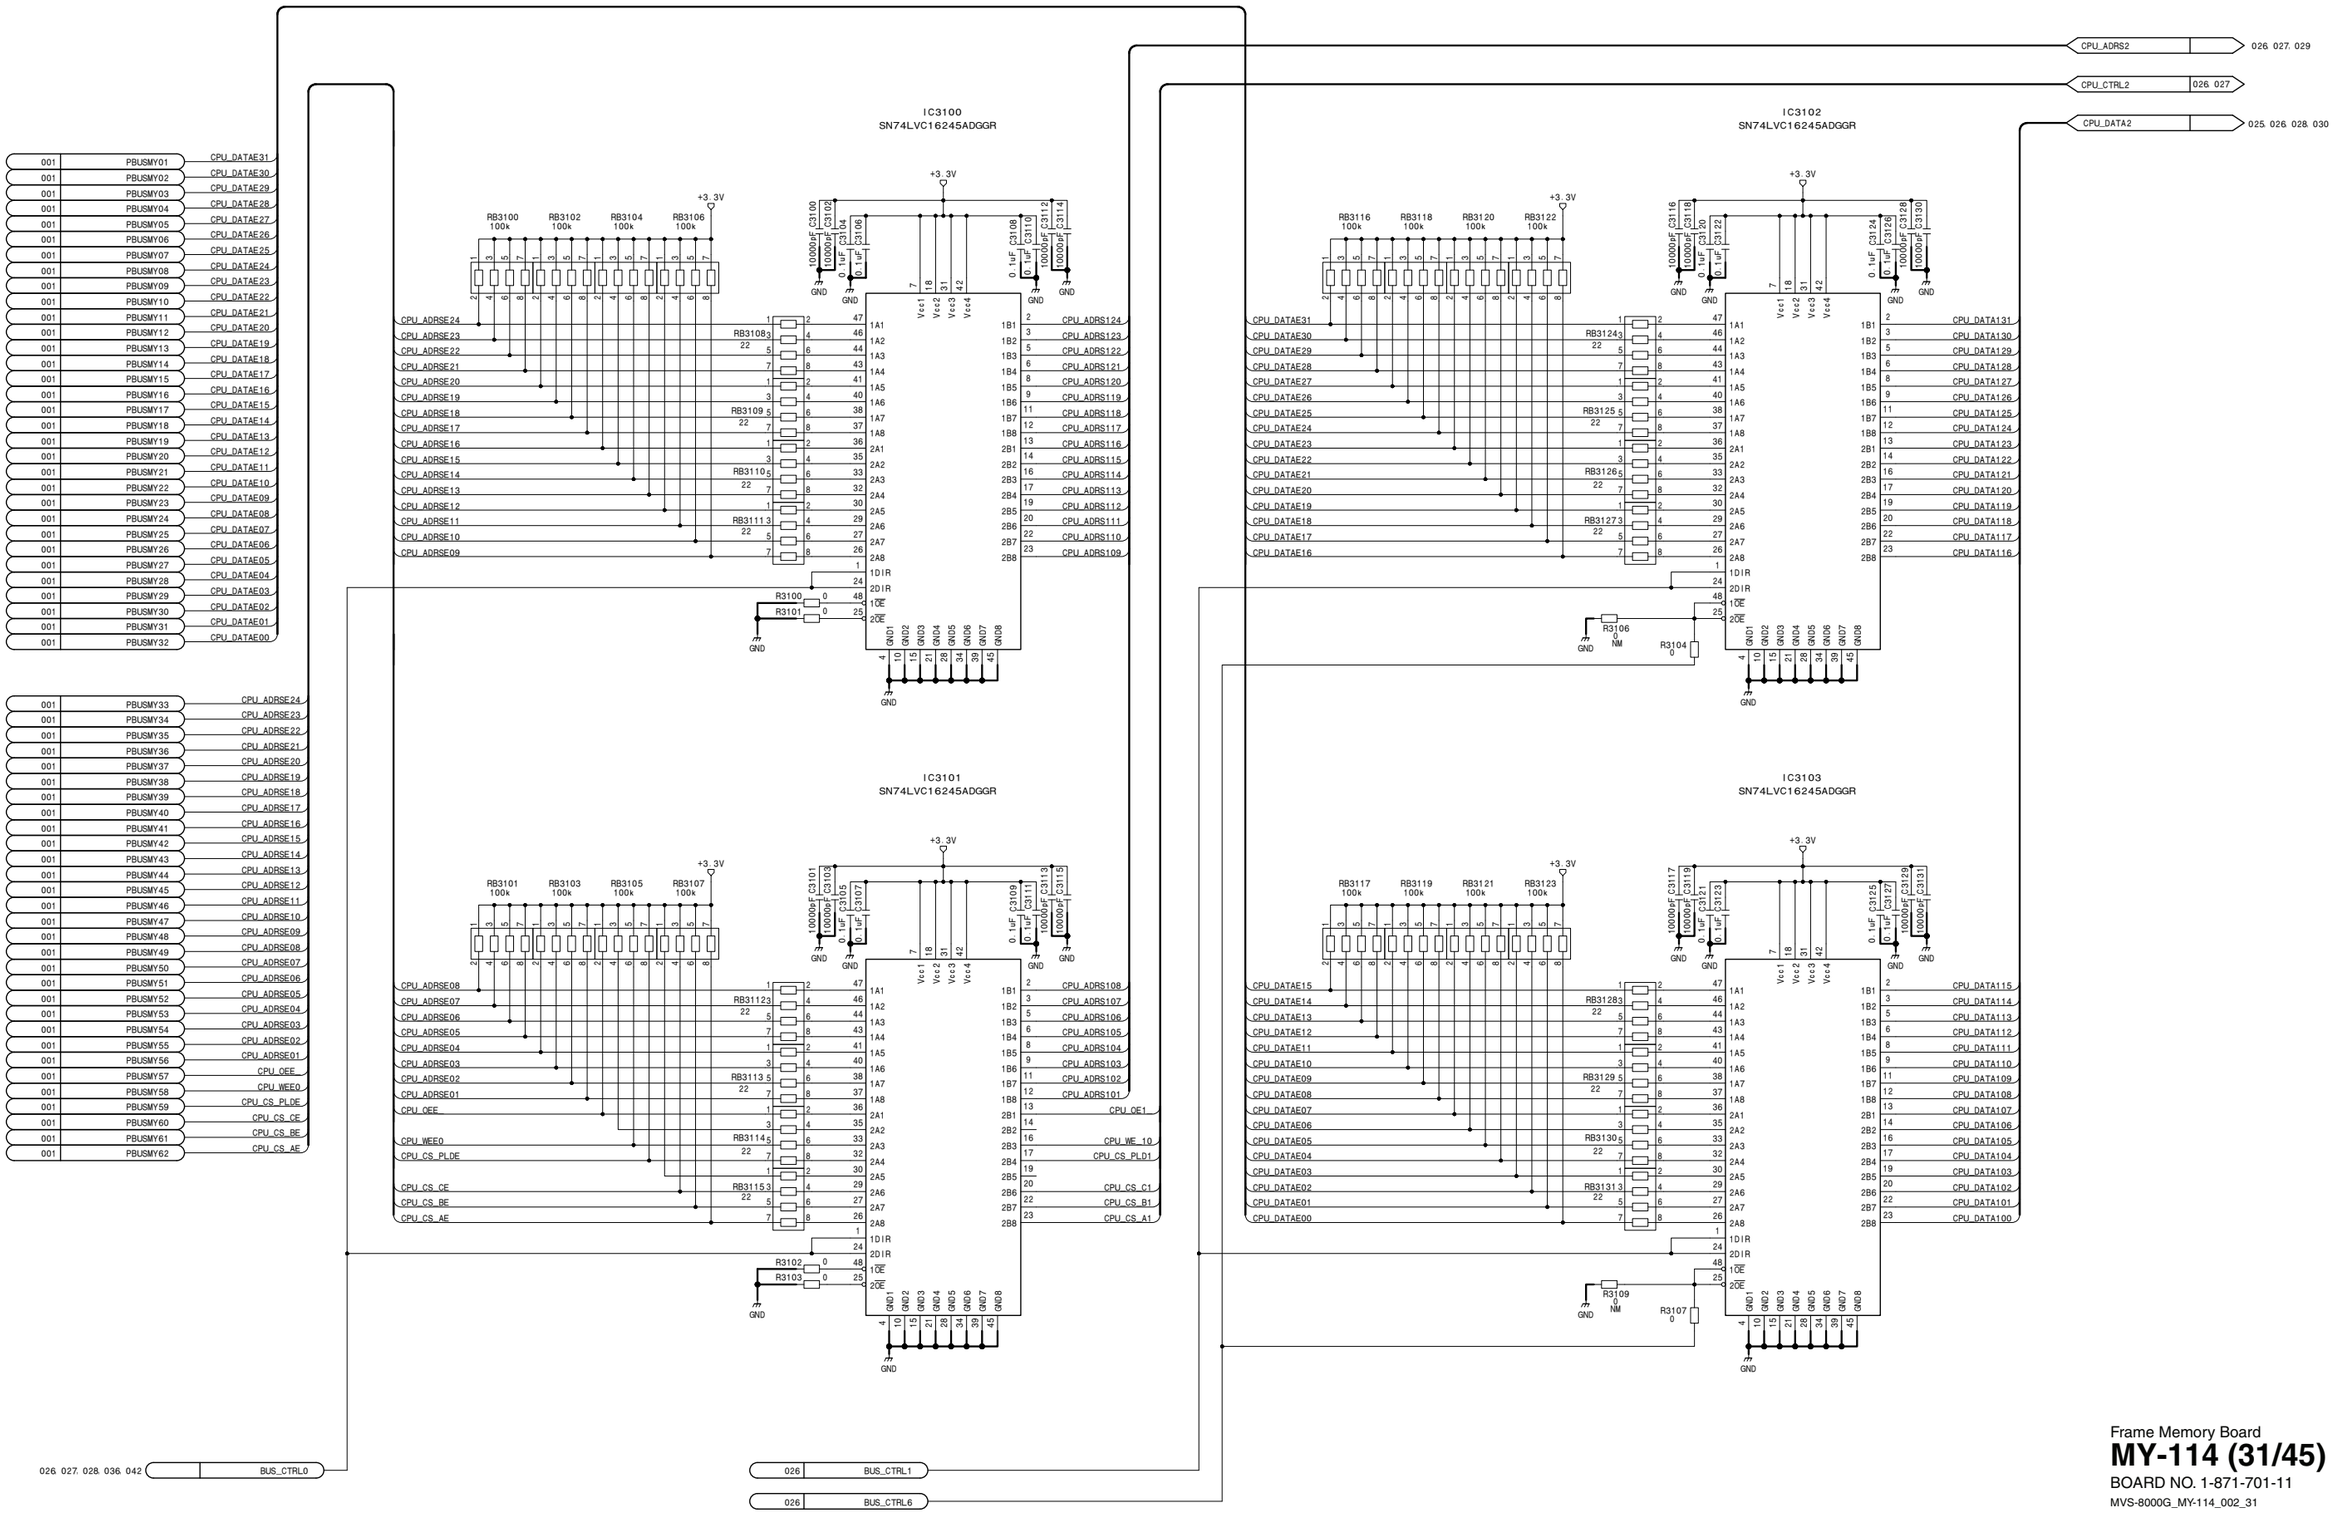


Frame Memory Board
MY-114 (31/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_31

MY-114 (32/45)
SUFFIX: -11

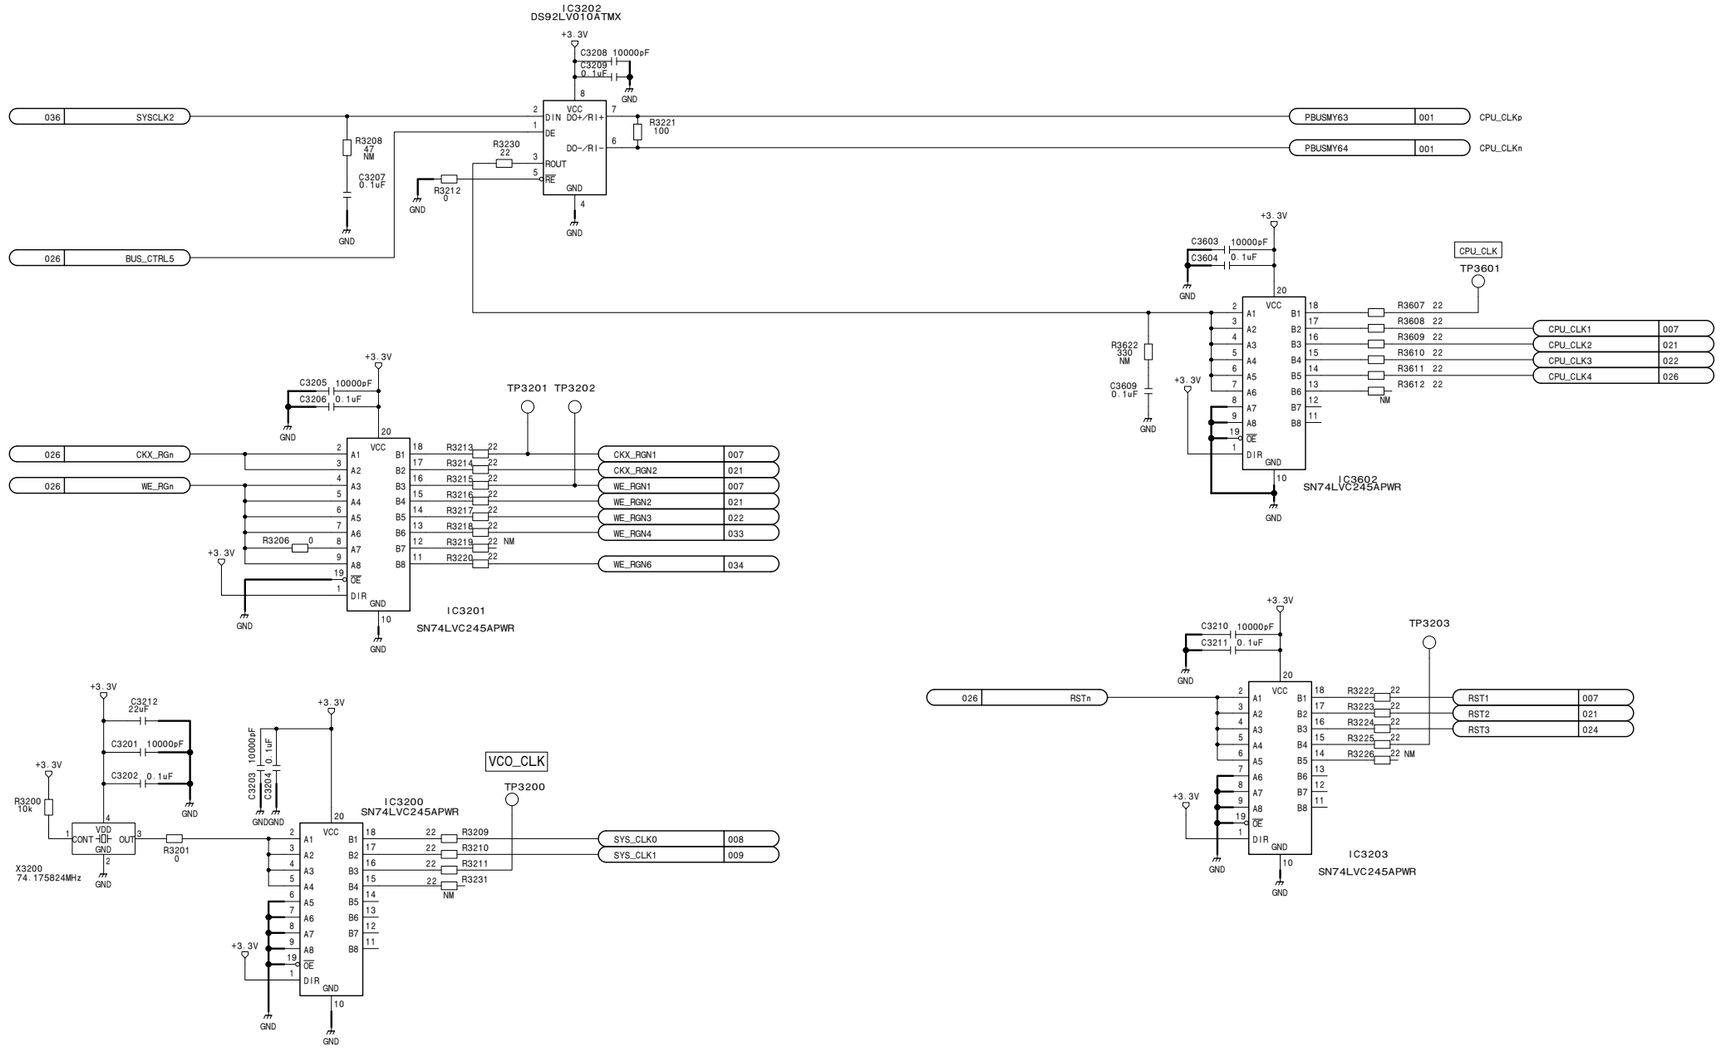


Frame Memory Board
MY-114 (32/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_32

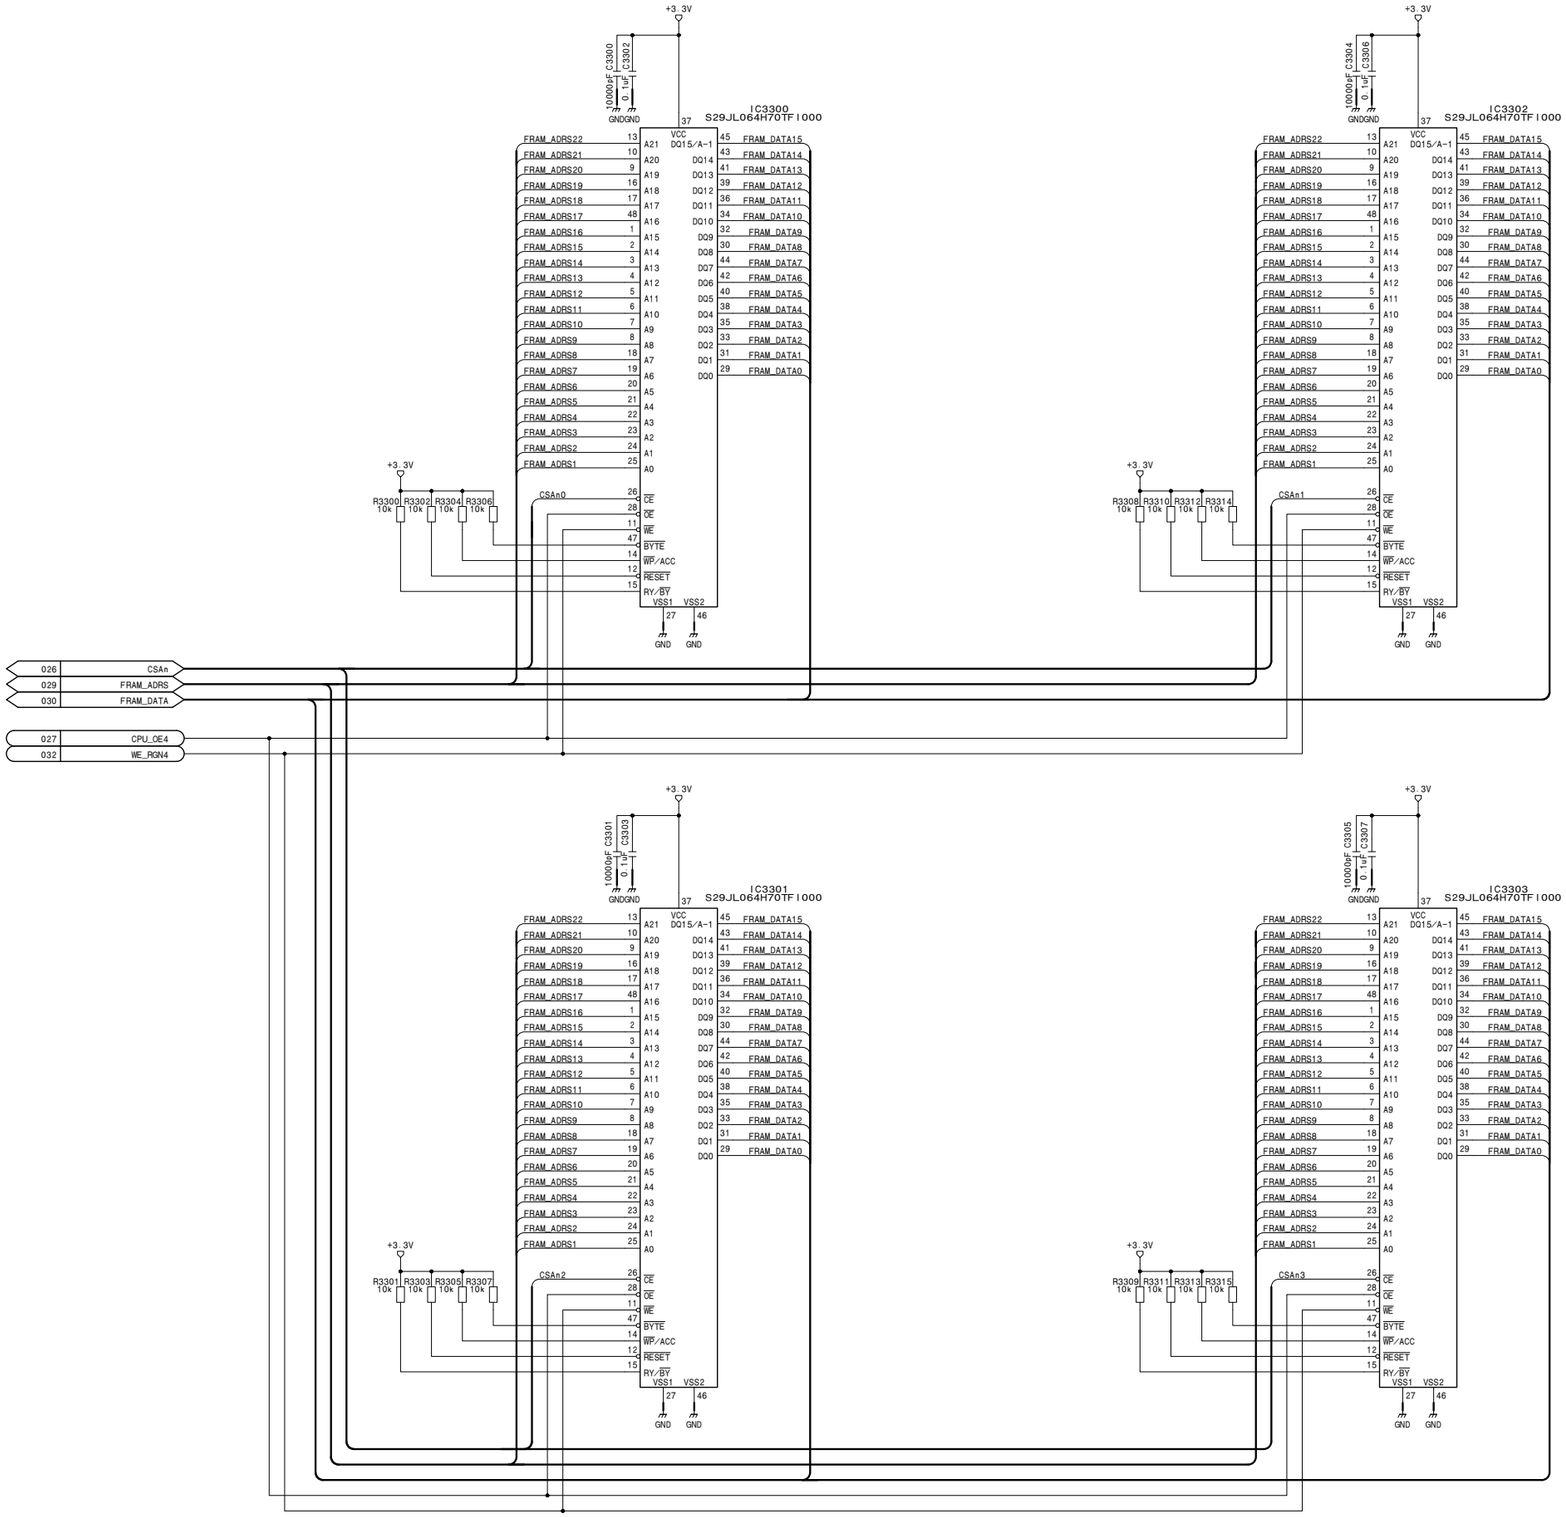

Frame Memory Board
MY-114 (33/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_33

MVS-6000 MM


MY-114 (34/45)
SUFFIX: -11

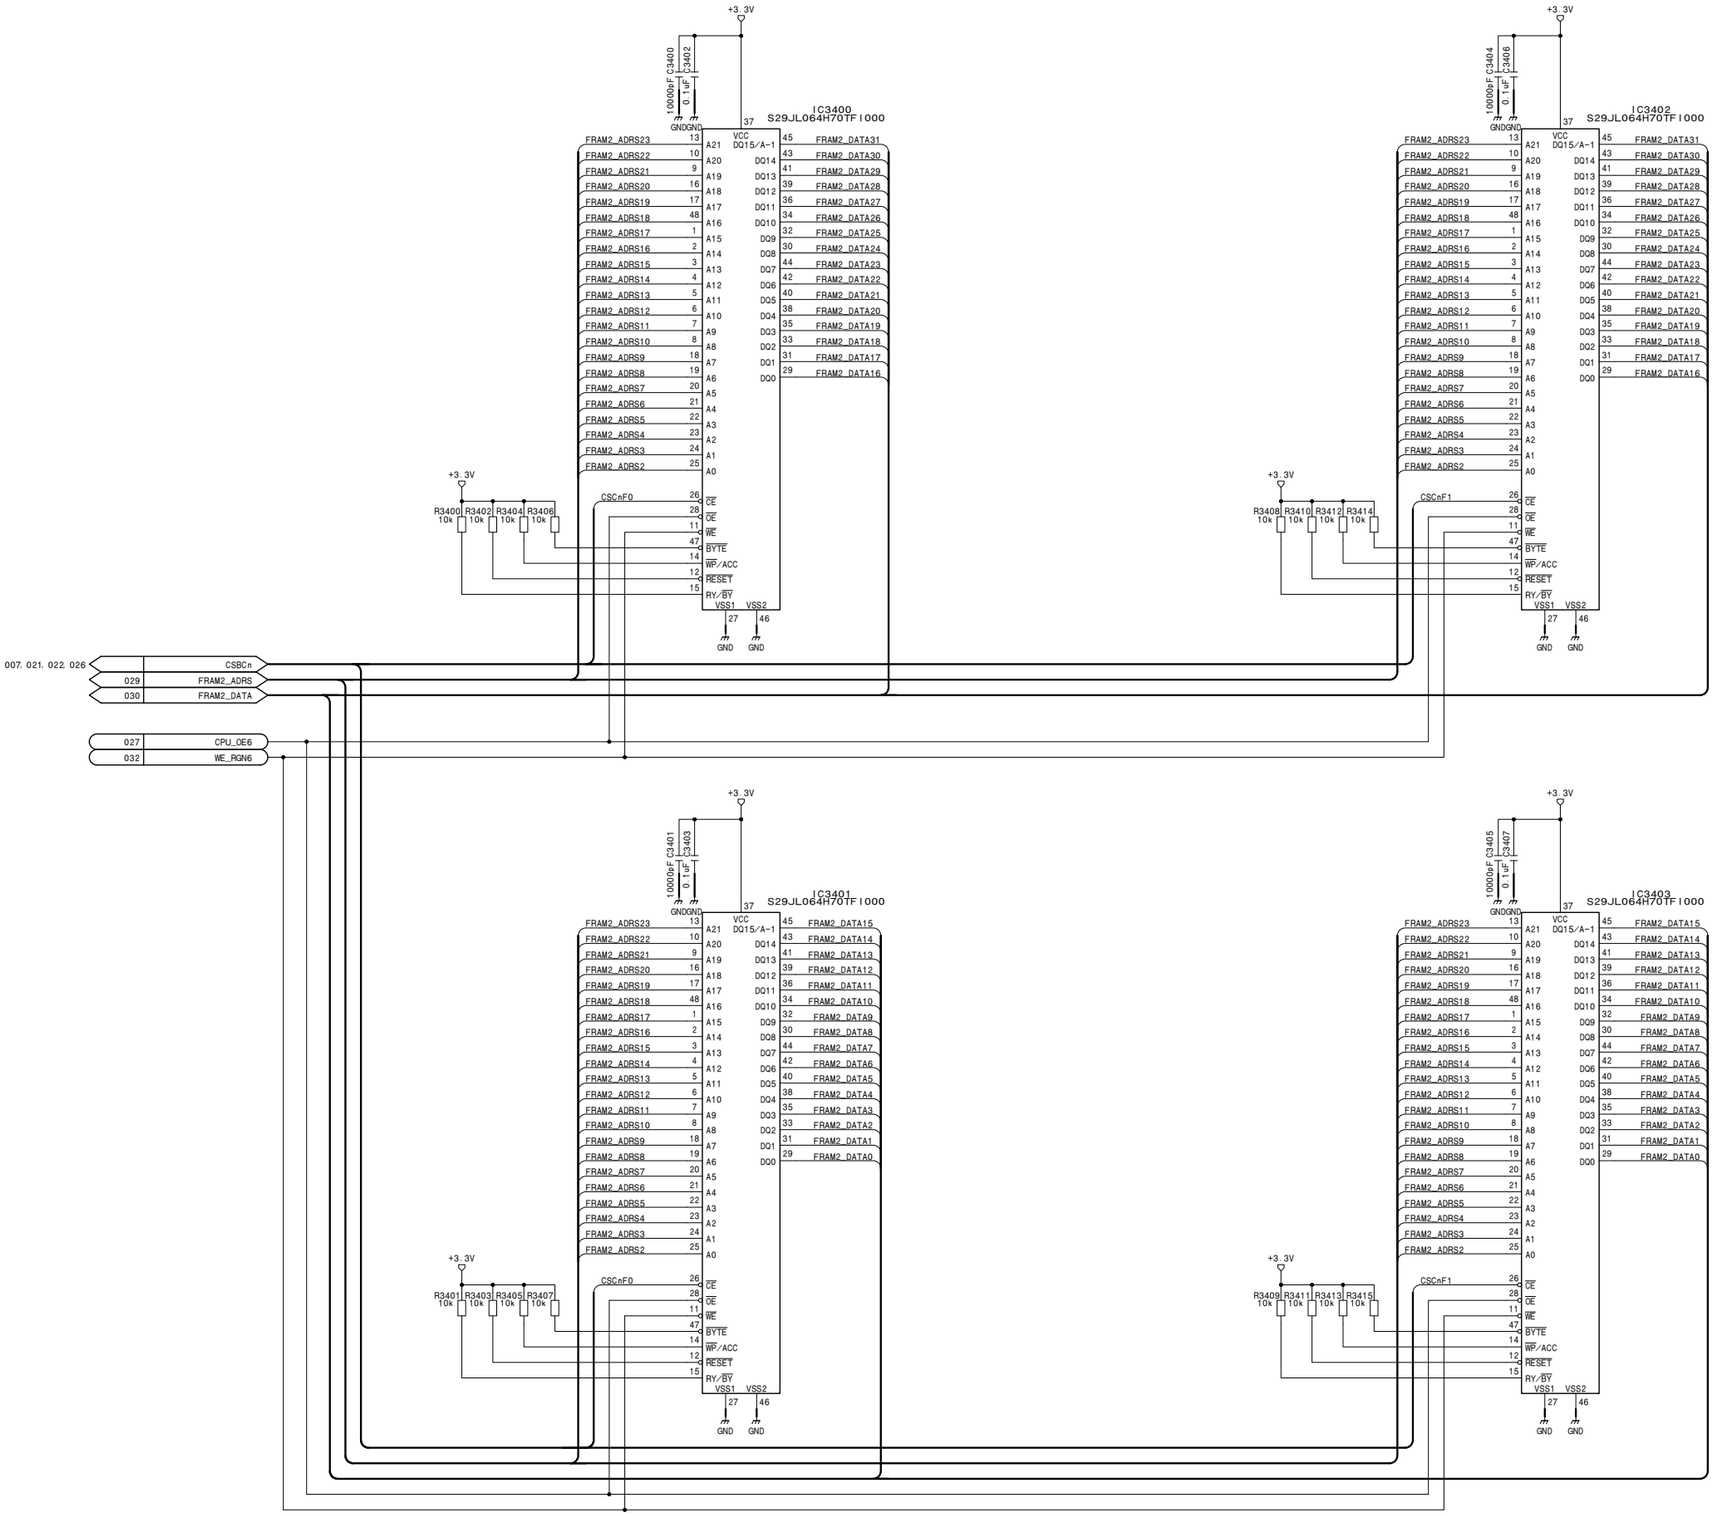

Frame Memory Board
MY-114 (34/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_34


MY-114 (35/45)
SUFFIX: -11

JTAG_CHAIN \ Ref	R3525	R3526	R3530
CADEC (IC1)	M*t	N.M*t	N.M*t
FULL (default)	N.M*t	M*t	M*t

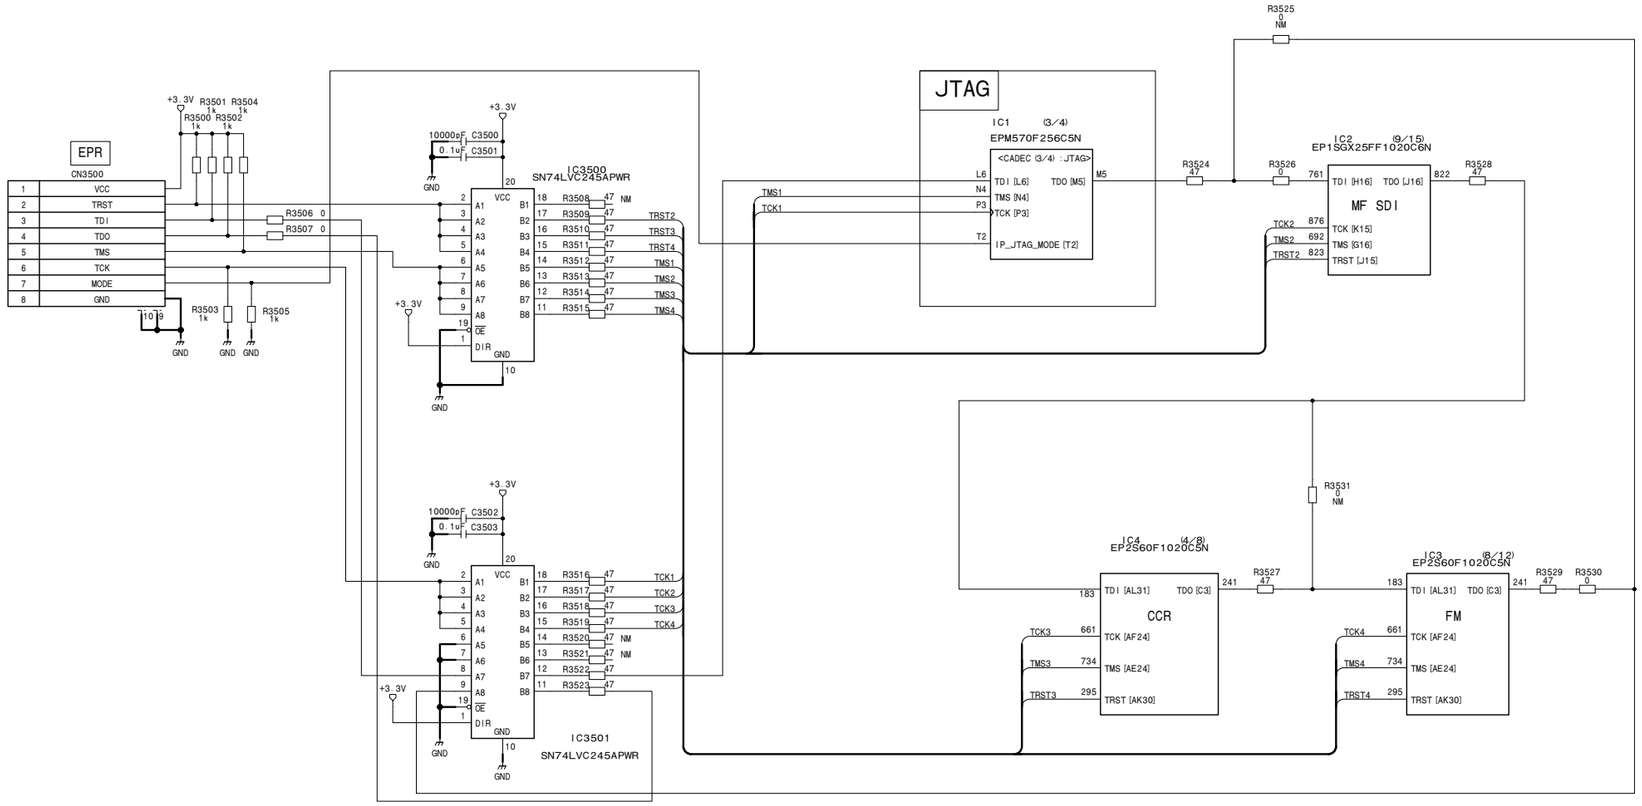

Frame Memory Board
MY-114 (35/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_35

MY-114 (36/45) **SUFFIX: -11**

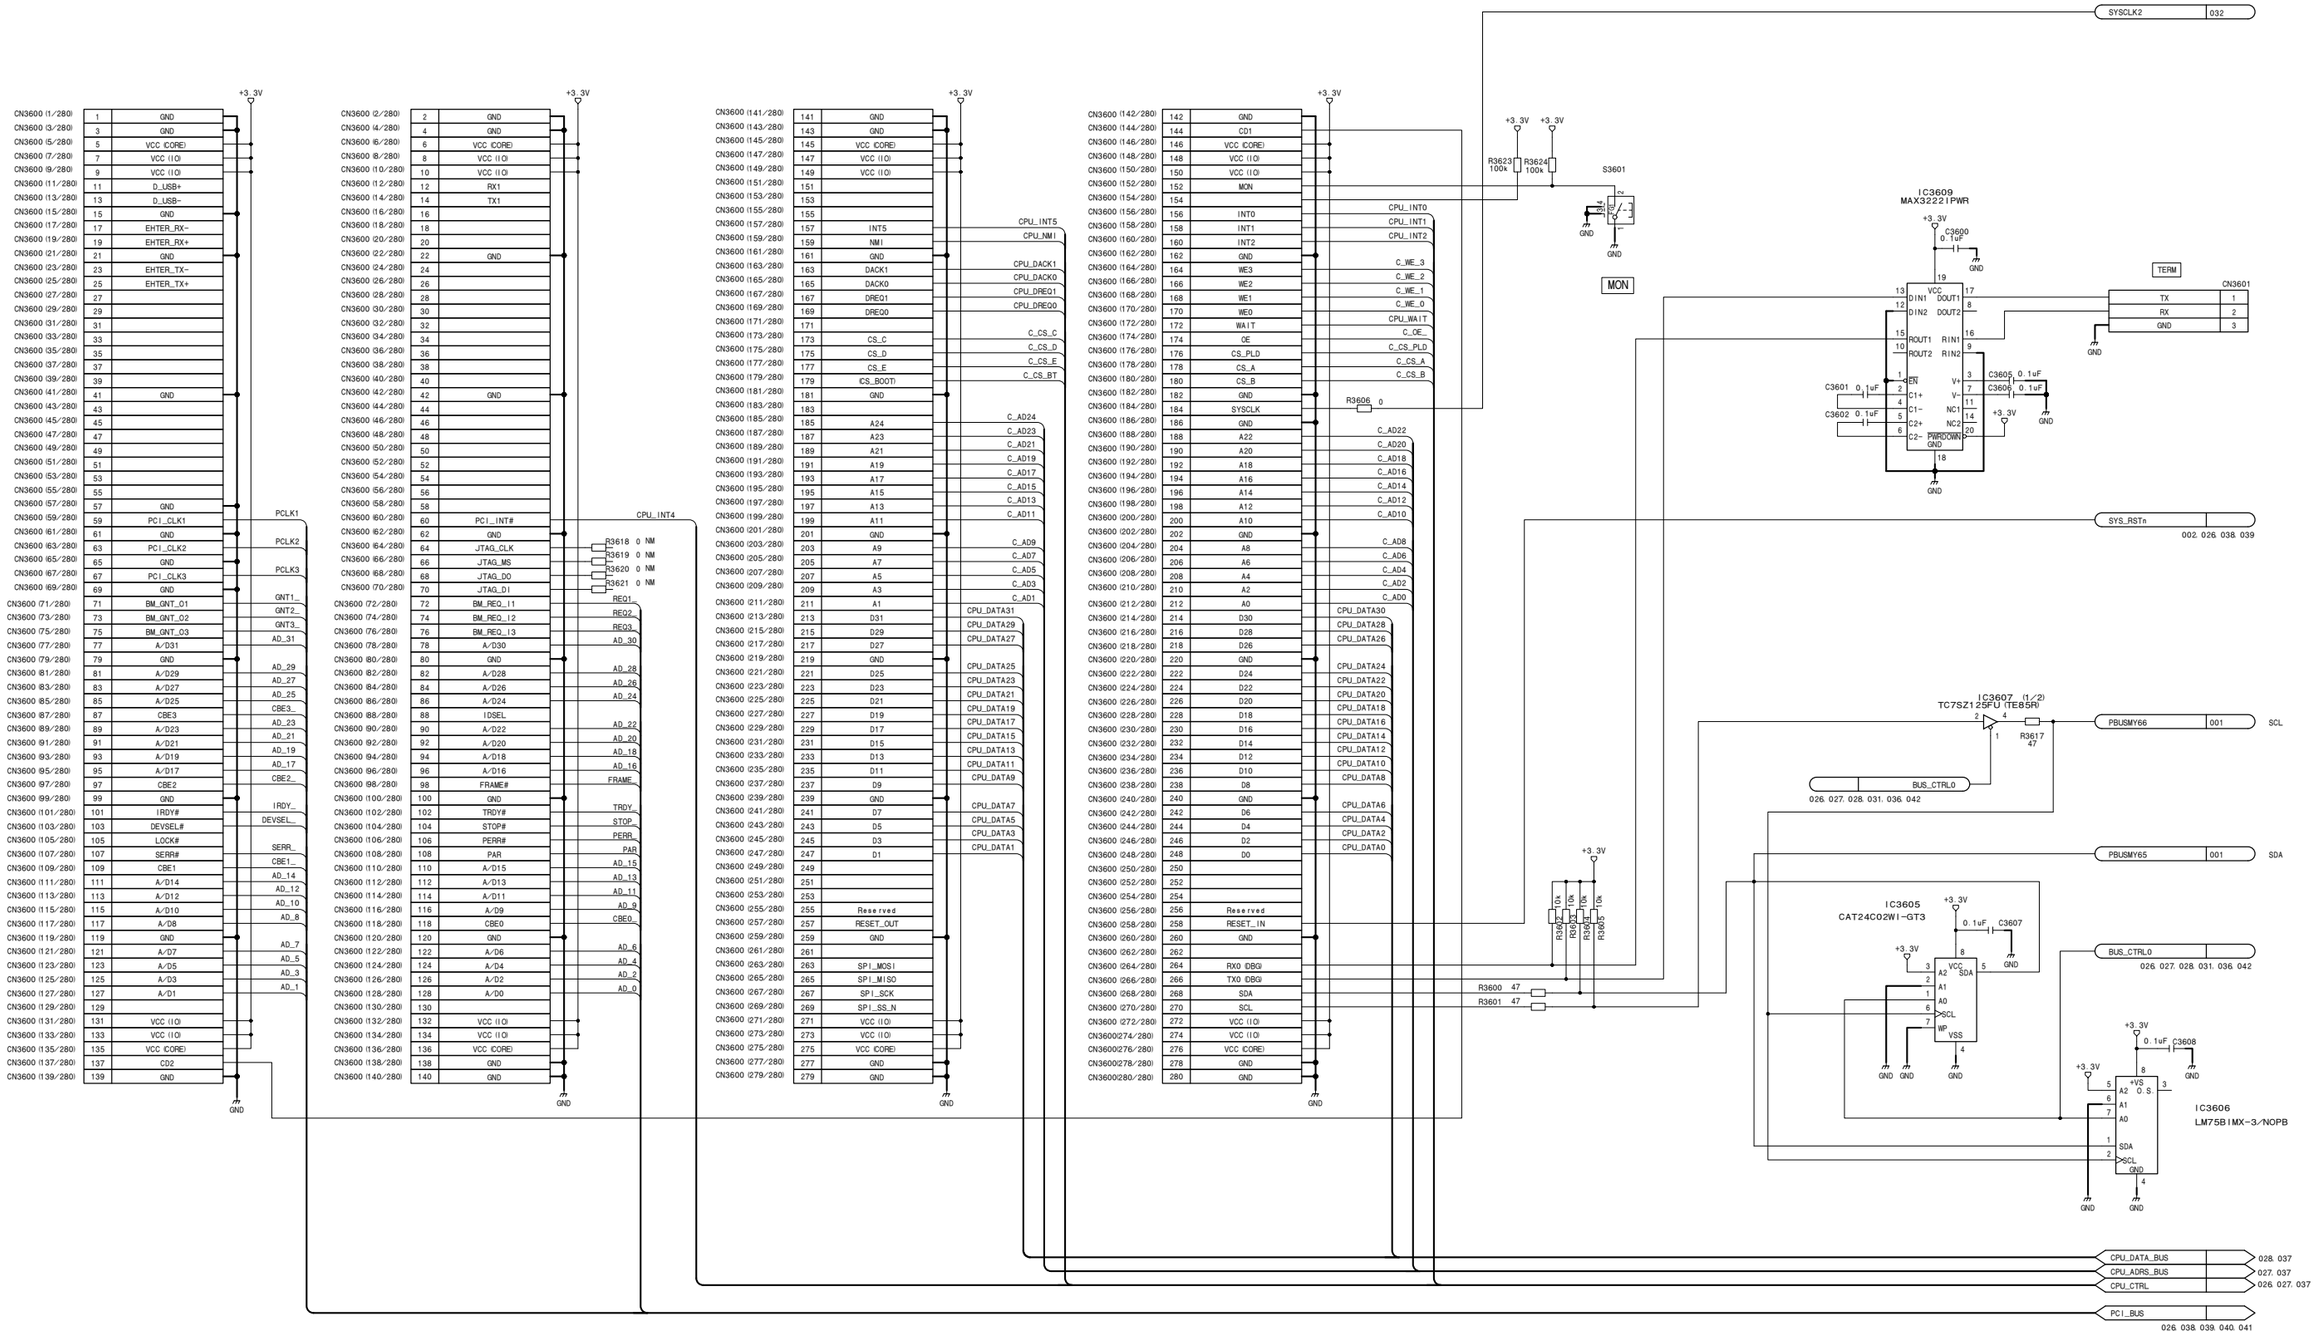


Frame Memory Board

MY-114 (36/45)


BOARD NO. 1-871-701-11

MVS-8000G_MY-114_002_36

MY-114 (37/45)
SUFFIX: -11

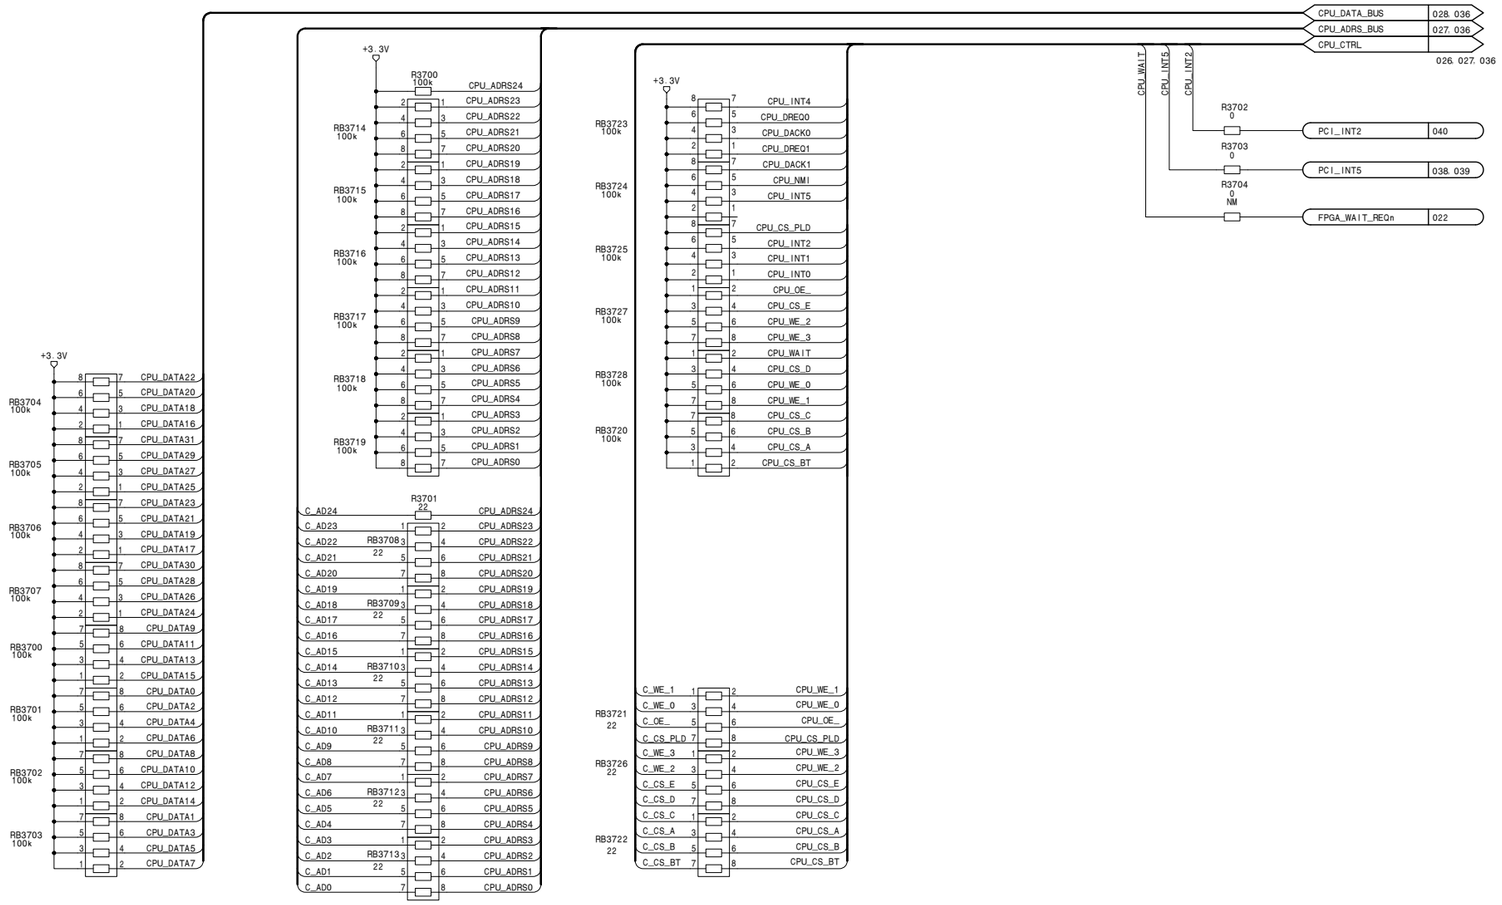


Frame Memory Board
MY-114 (37/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_37

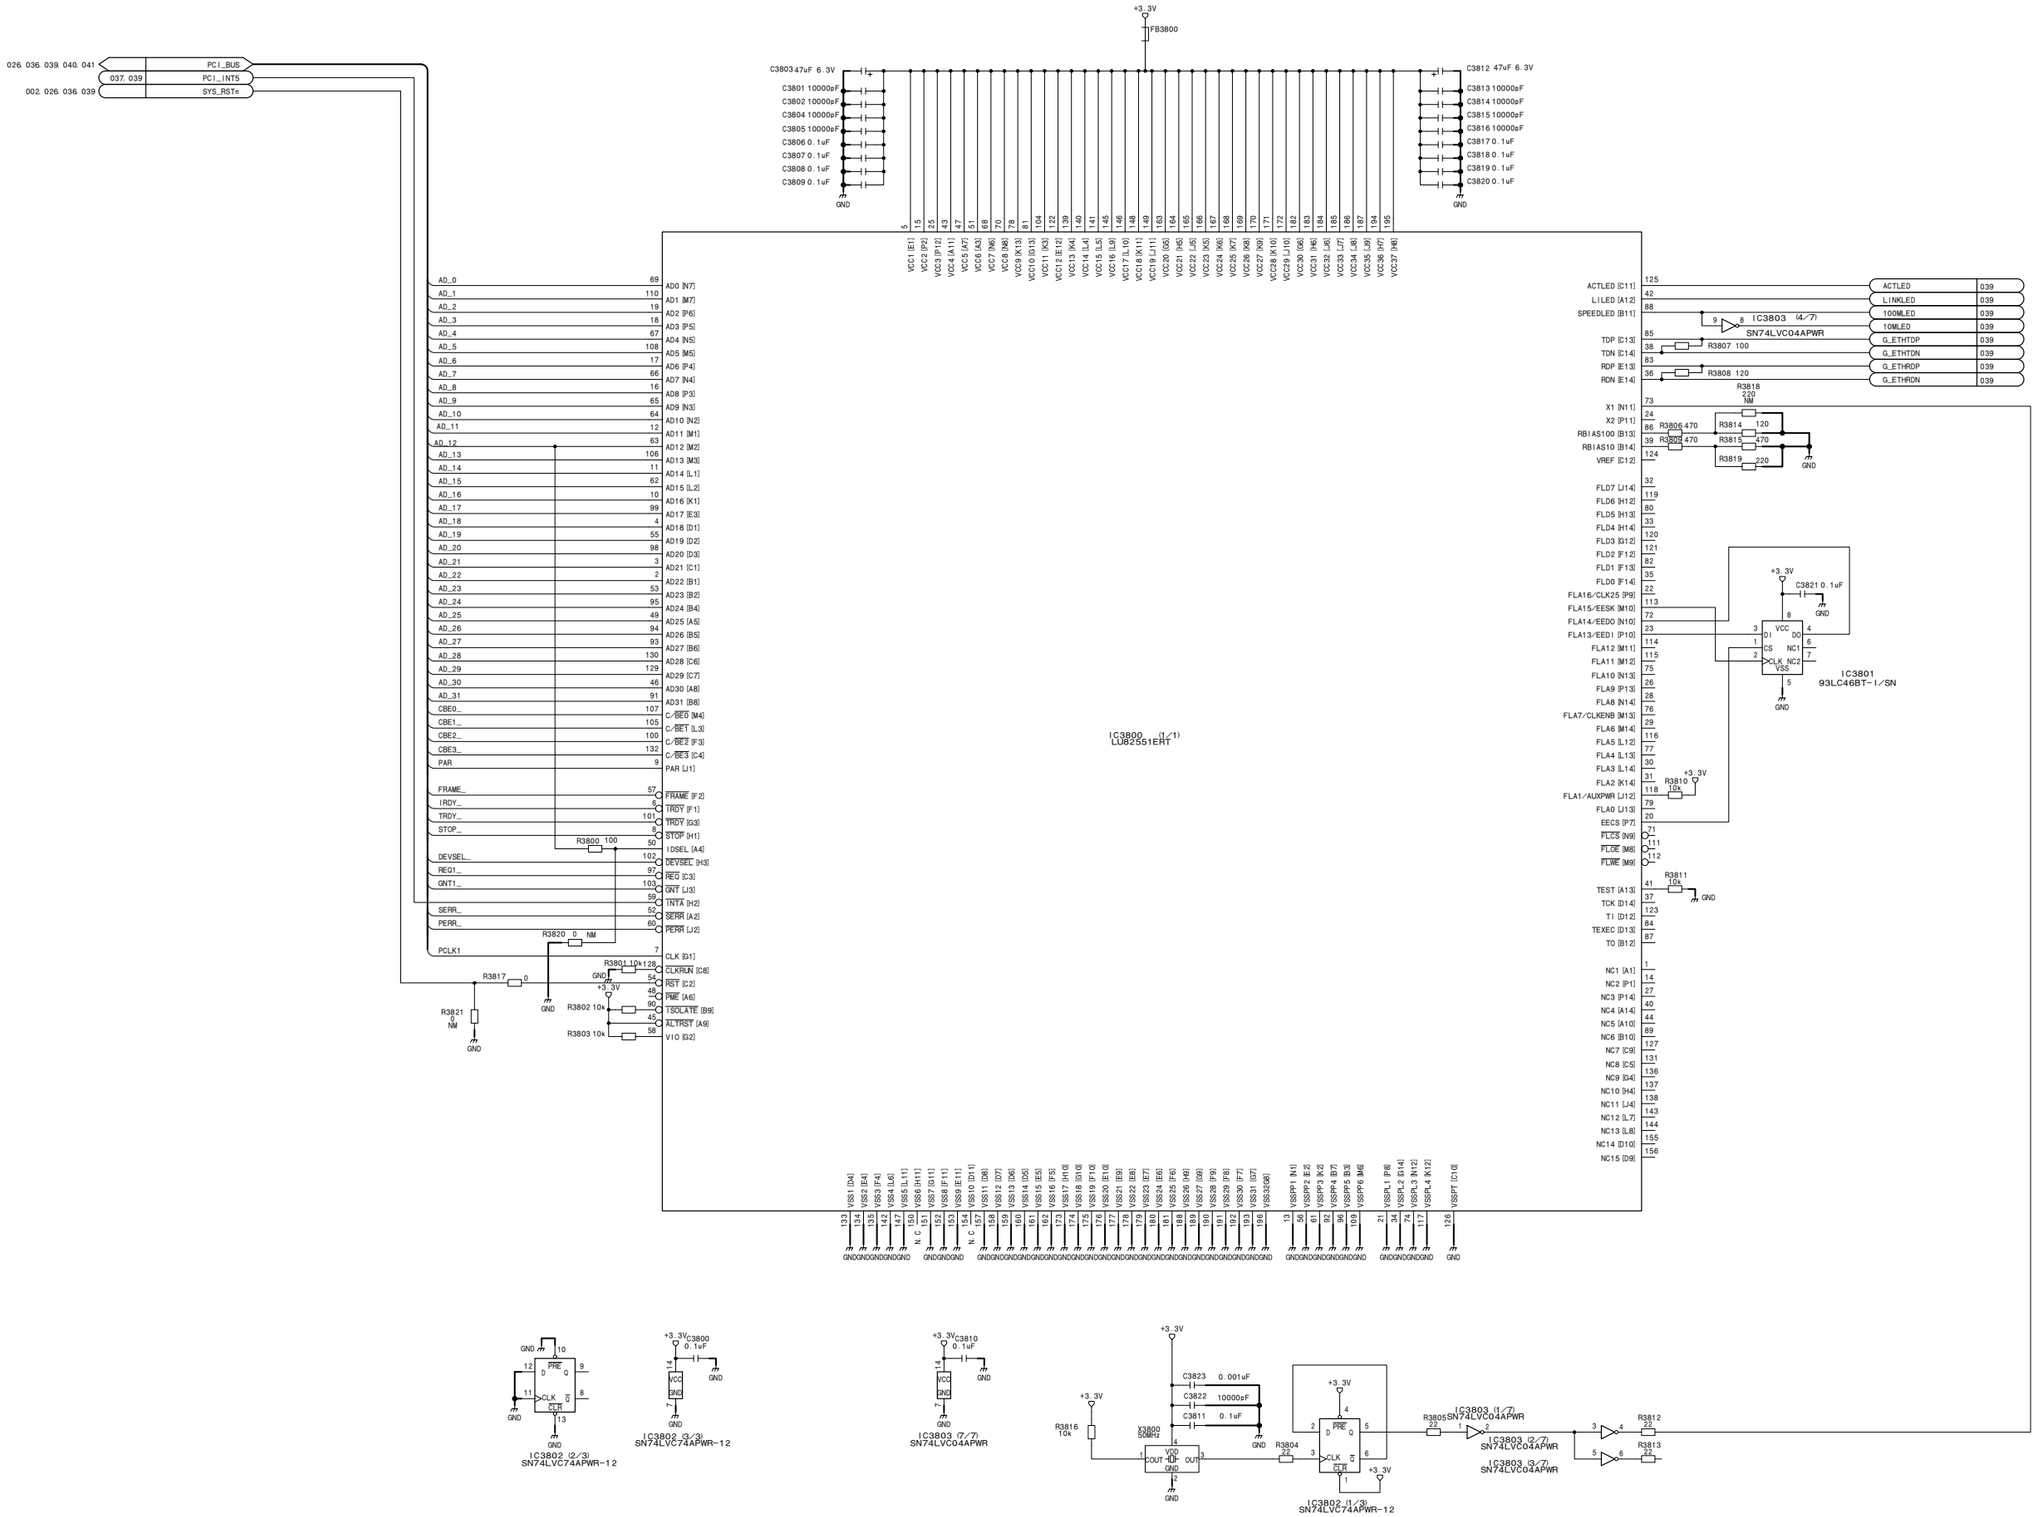


Frame Memory Board
MY-114 (38/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_38

MY-114 (39/45)
SUFFIX: -11

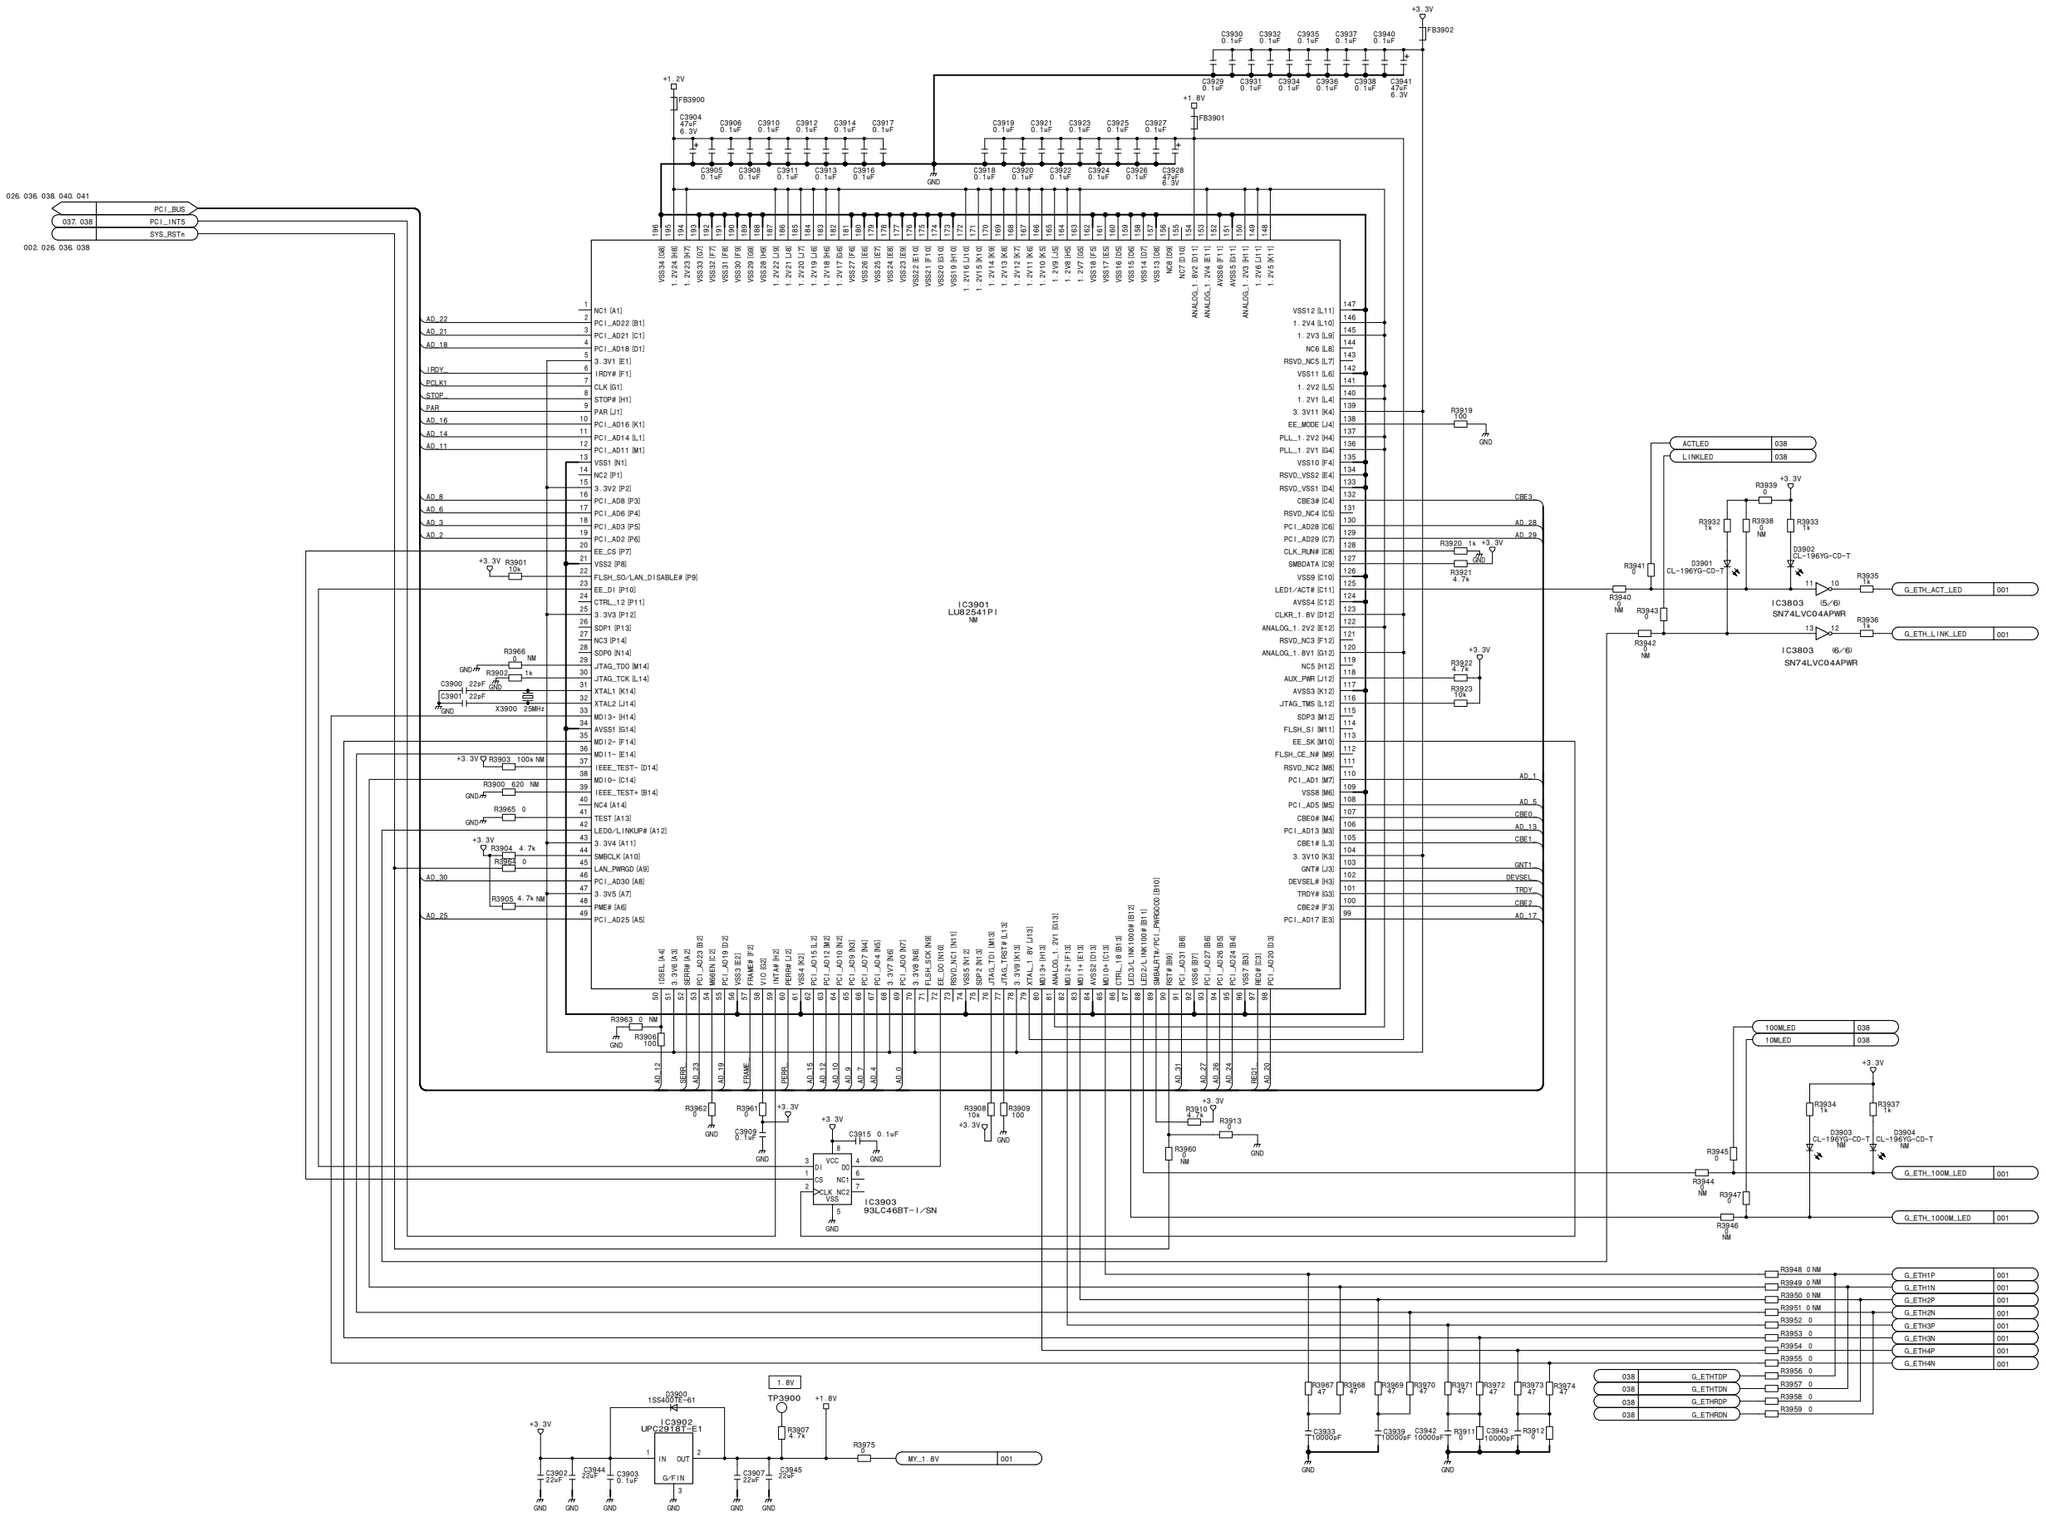


Frame Memory Board
MY-114 (39/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_39

MY-114 (40/45)
SUFFIX: -11

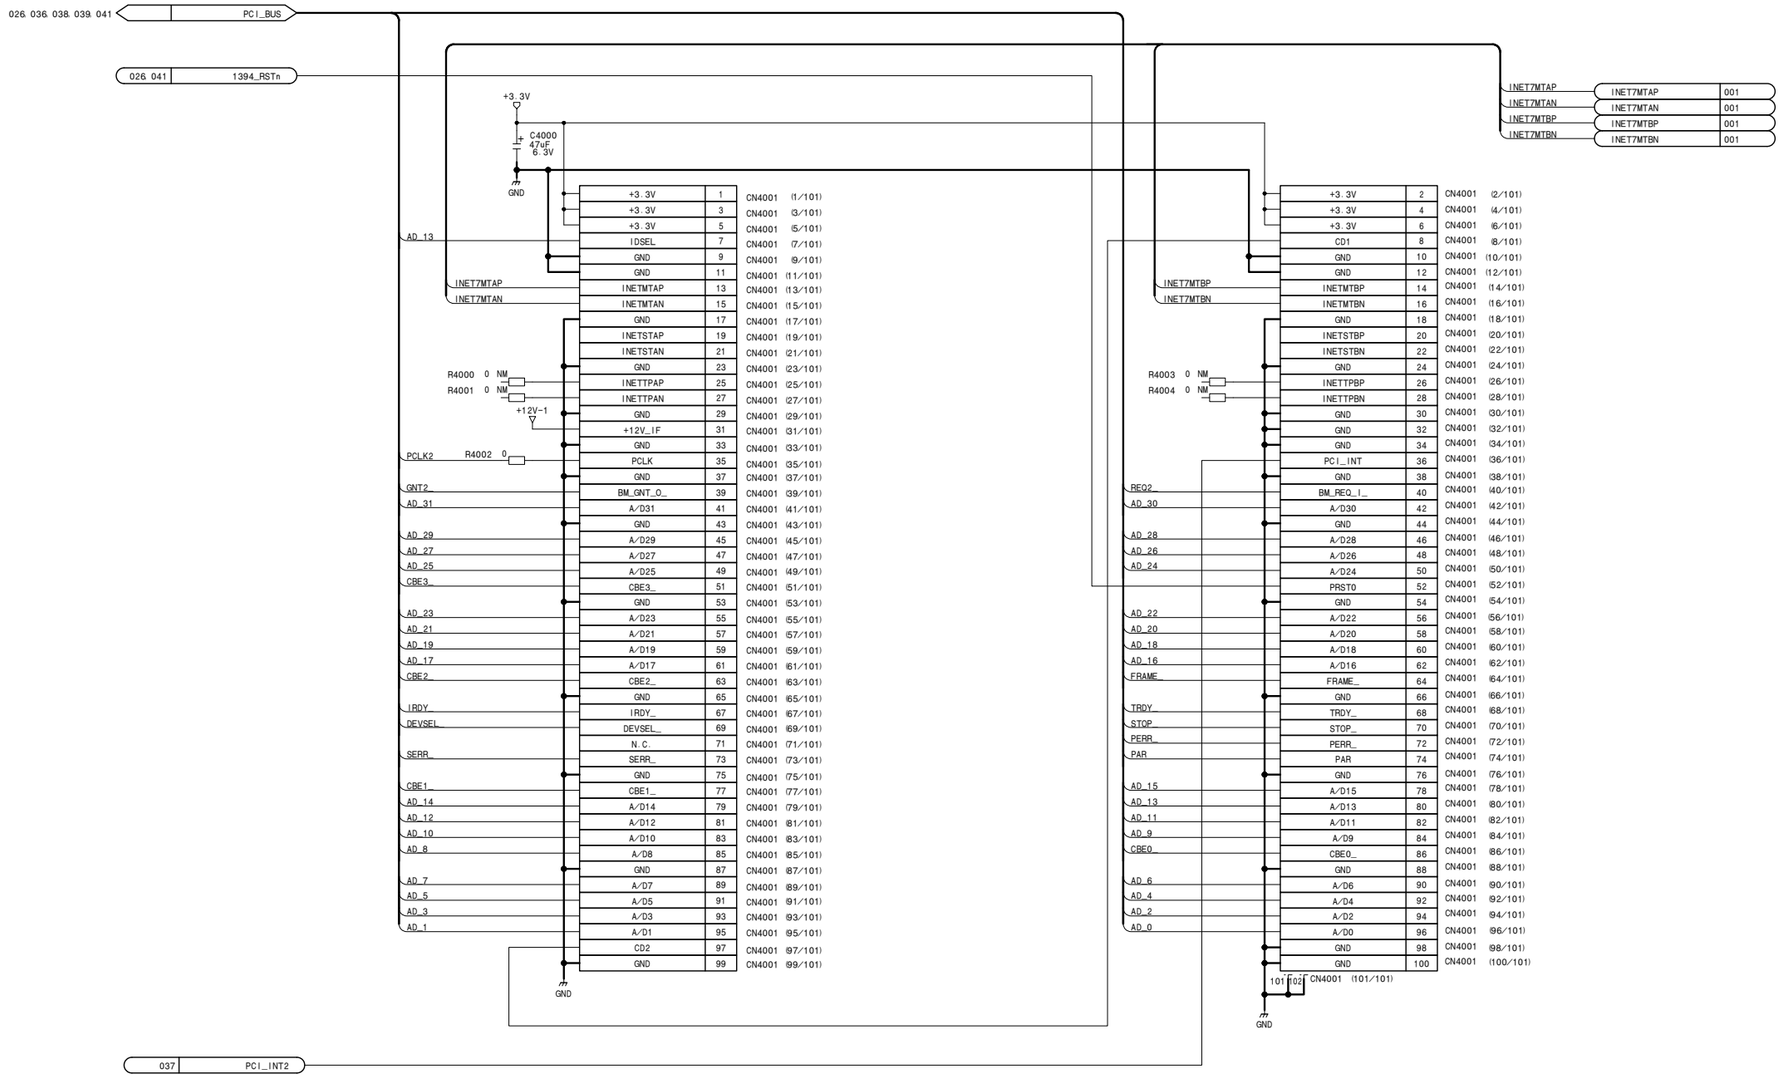


Frame Memory Board
MY-114 (40/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_40

MY-114 (41/45)
SUFFIX: -11

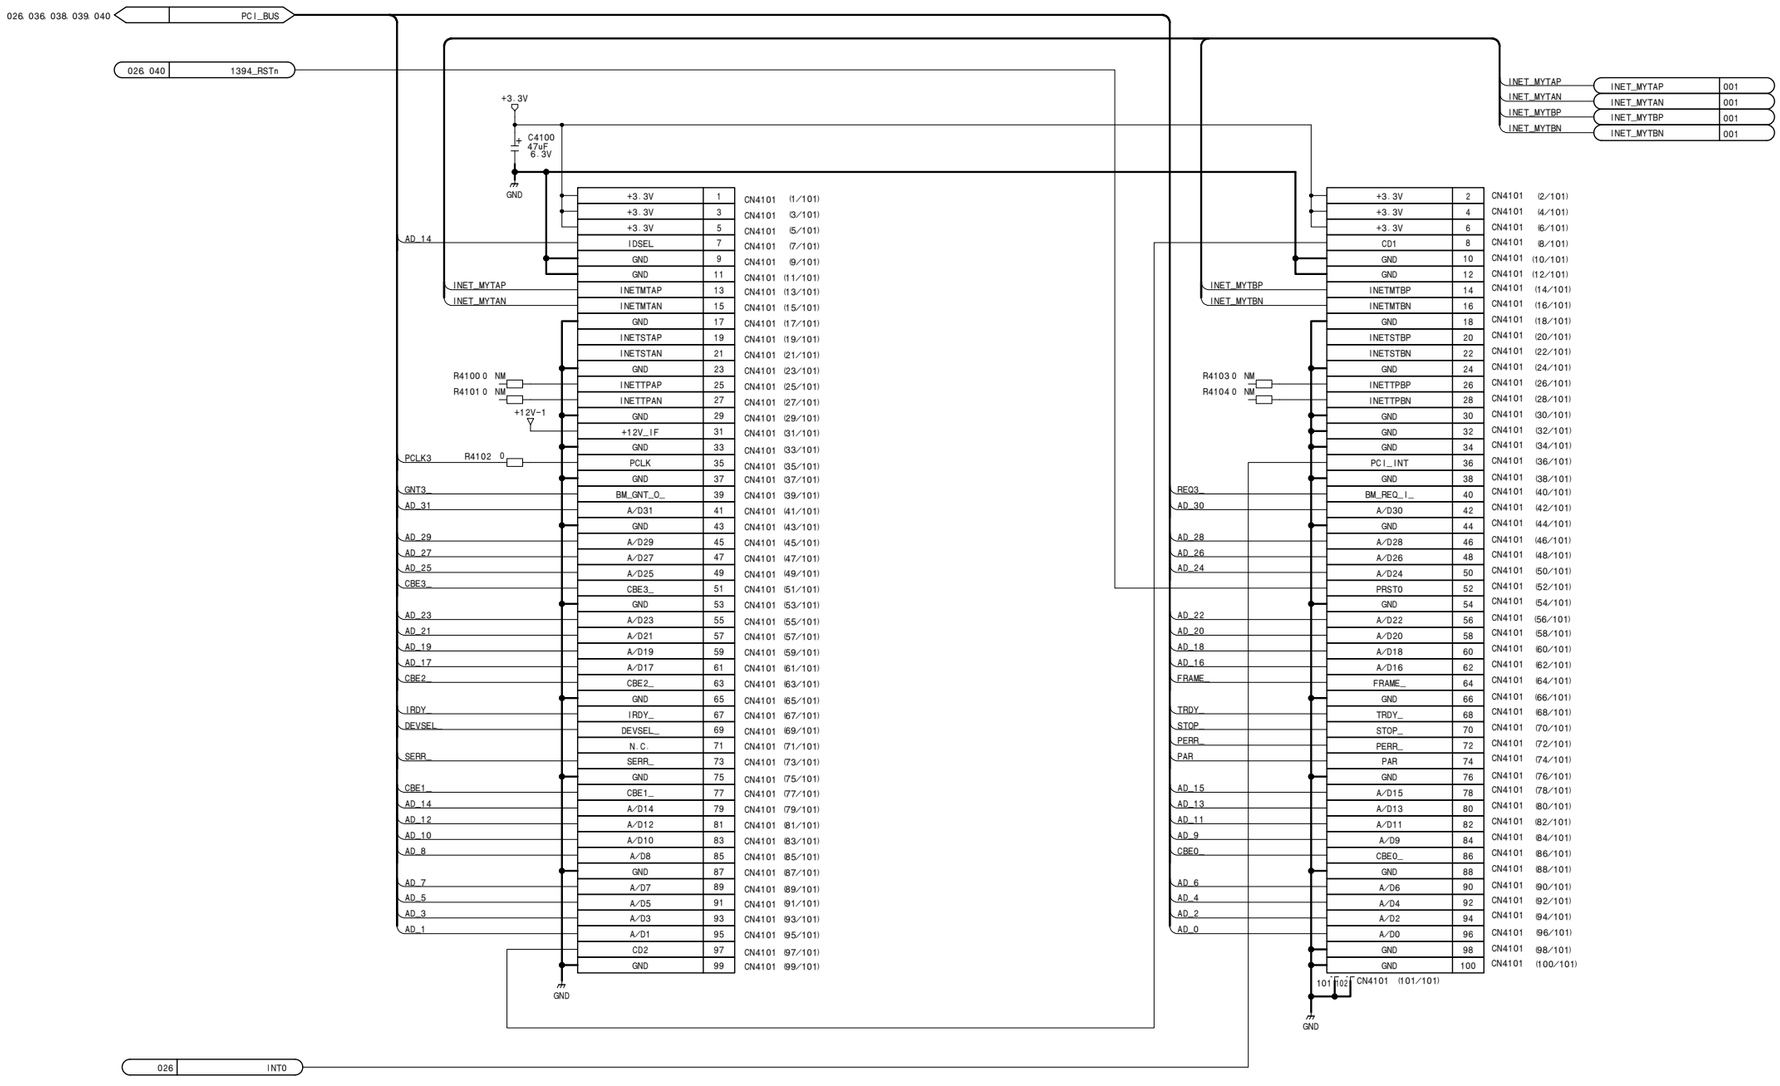


Frame Memory Board
MY-114 (41/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_41


MY-114 (42/45)
SUFFIX: -11

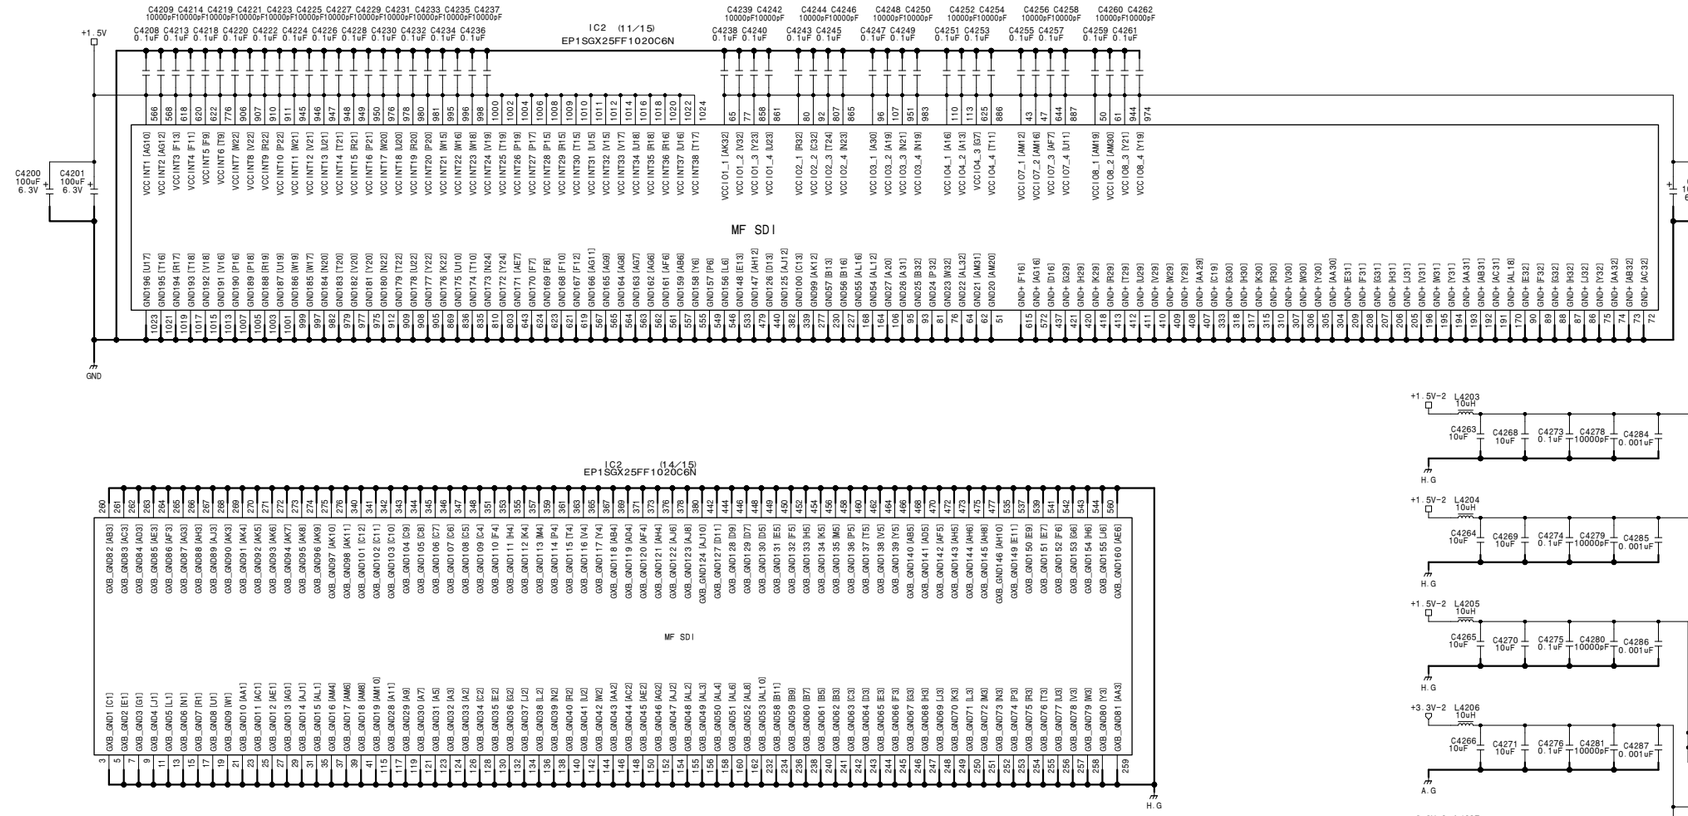



Frame Memory Board
MY-114 (42/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_42

MY-114 (43/45) **SUFFIX: -11**

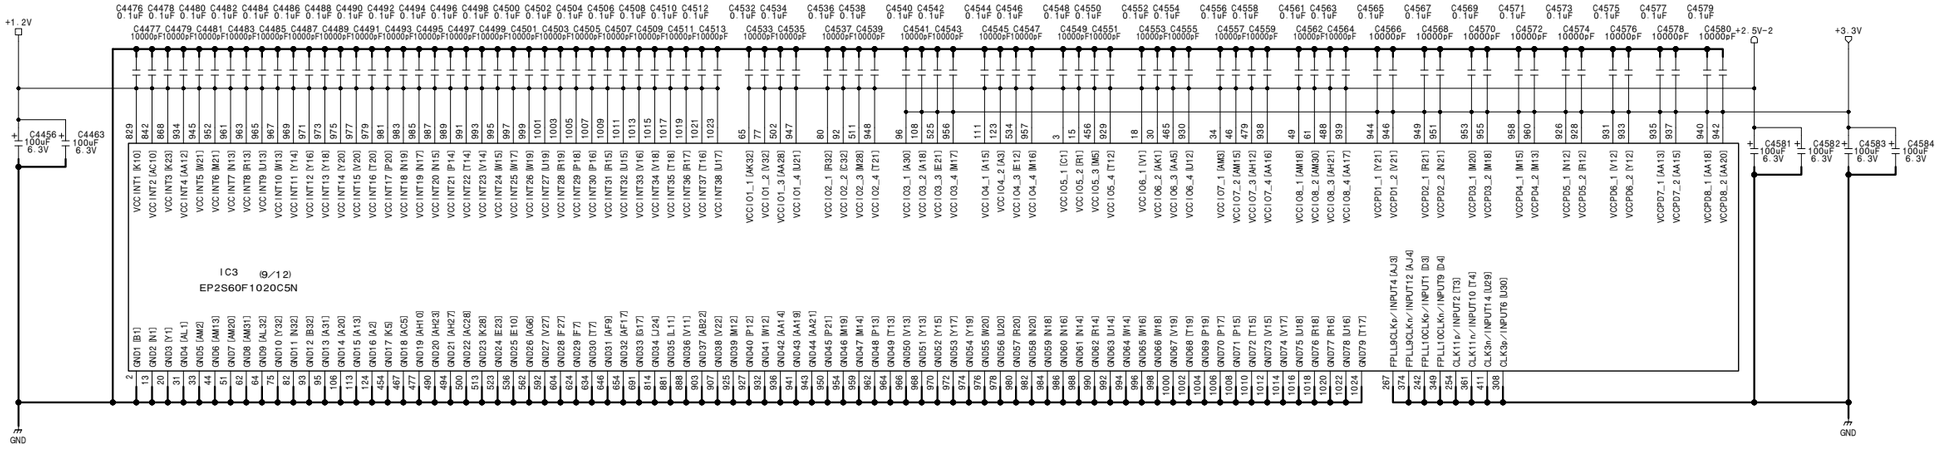

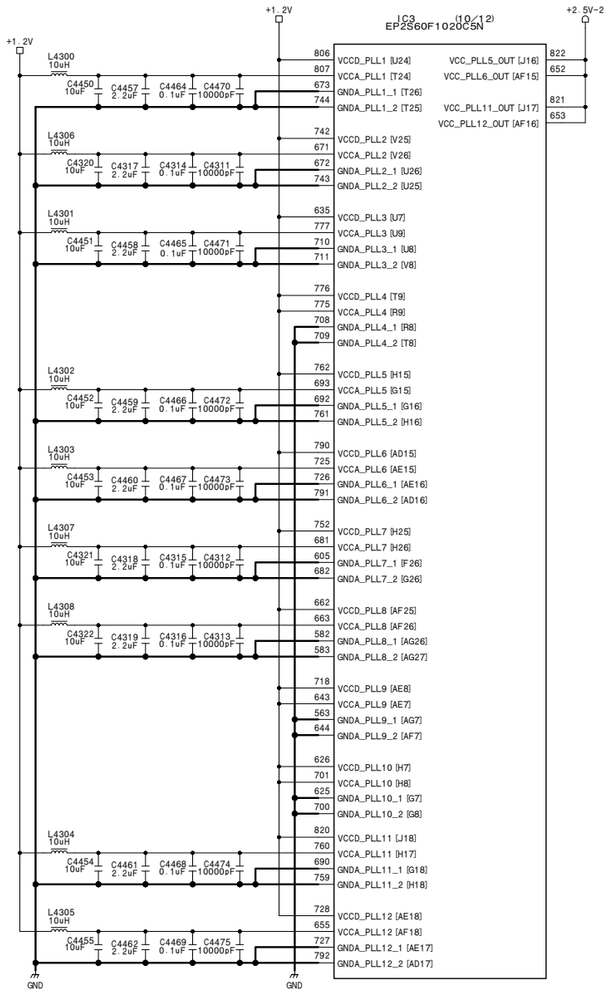


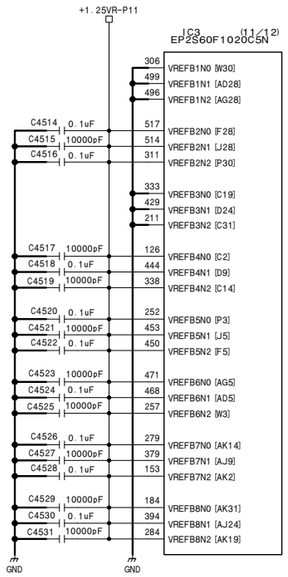


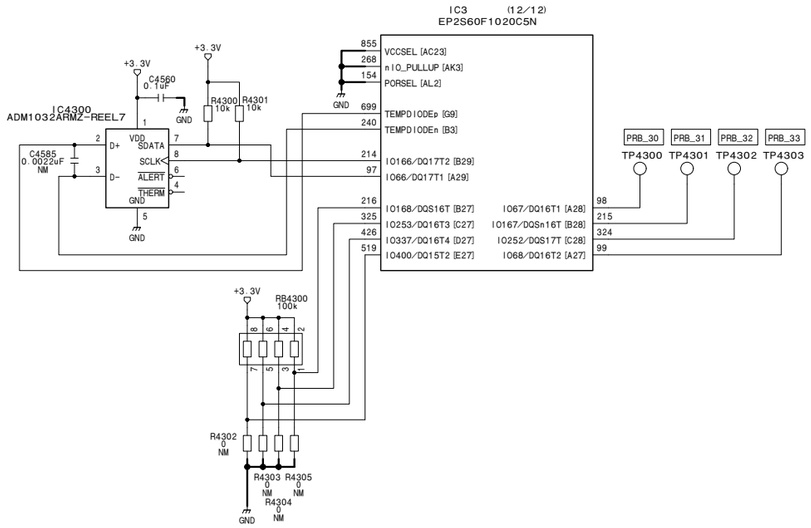



Frame Memory Board
MY-114 (43/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_43


MY-114 (44/45)
SUFFIX: -11

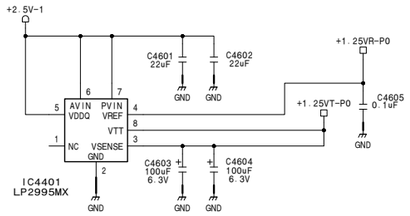


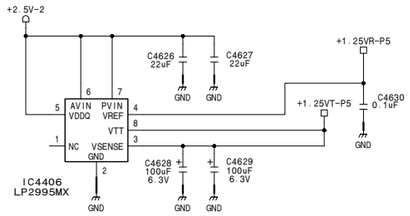


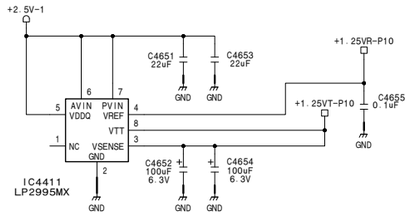


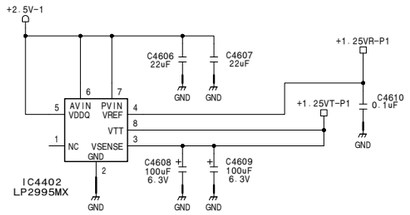


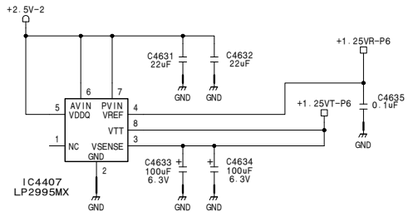


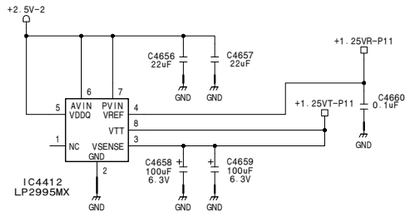


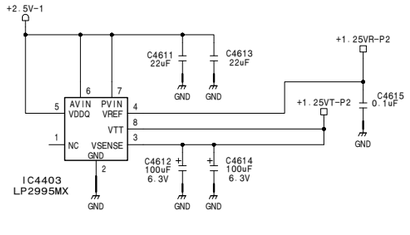


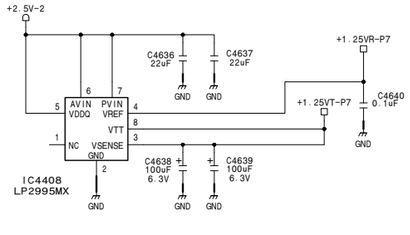

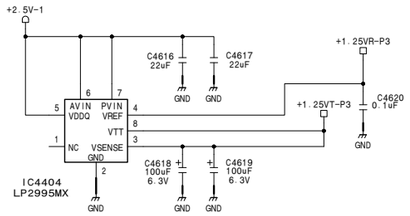

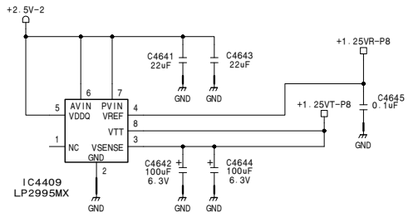


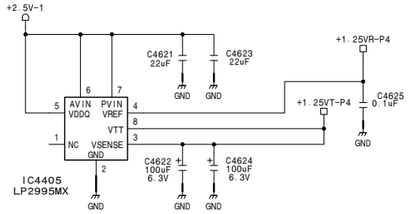


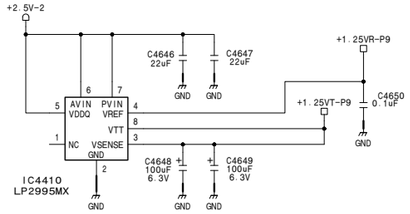



Frame Memory Board
MY-114 (44/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_44

MY-114 (45/45) **SUFFIX: -11**

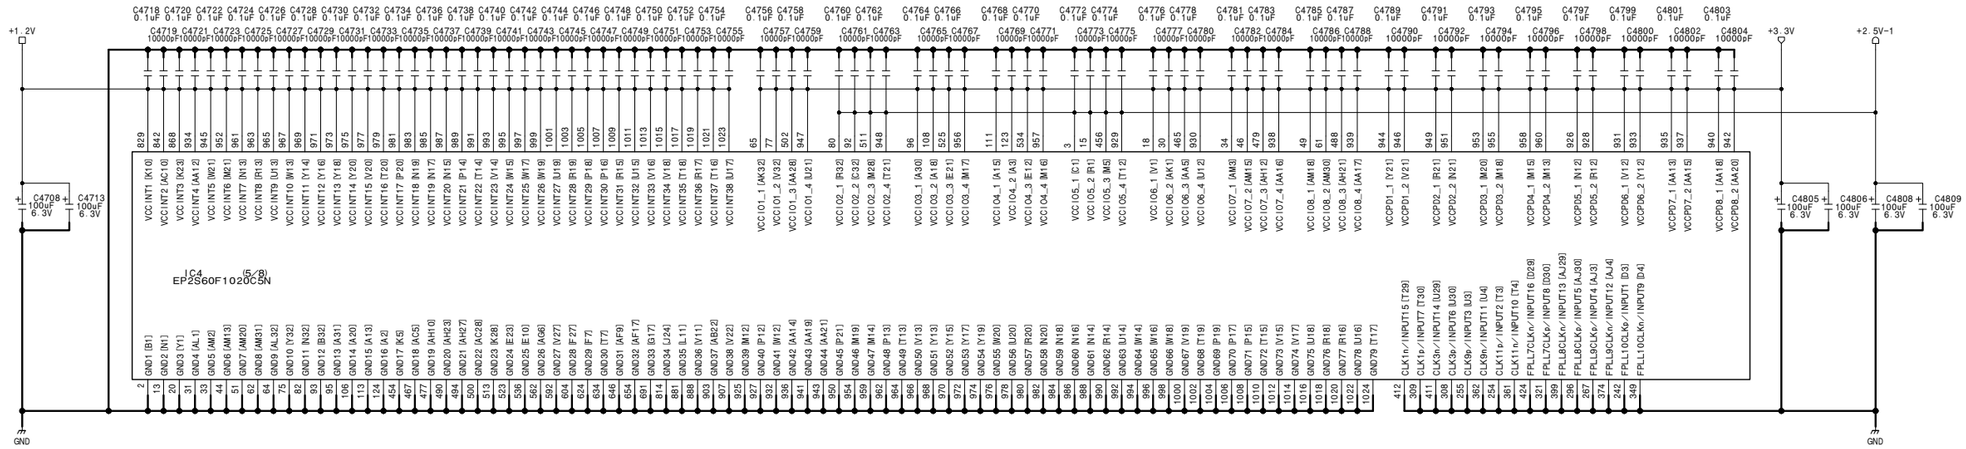

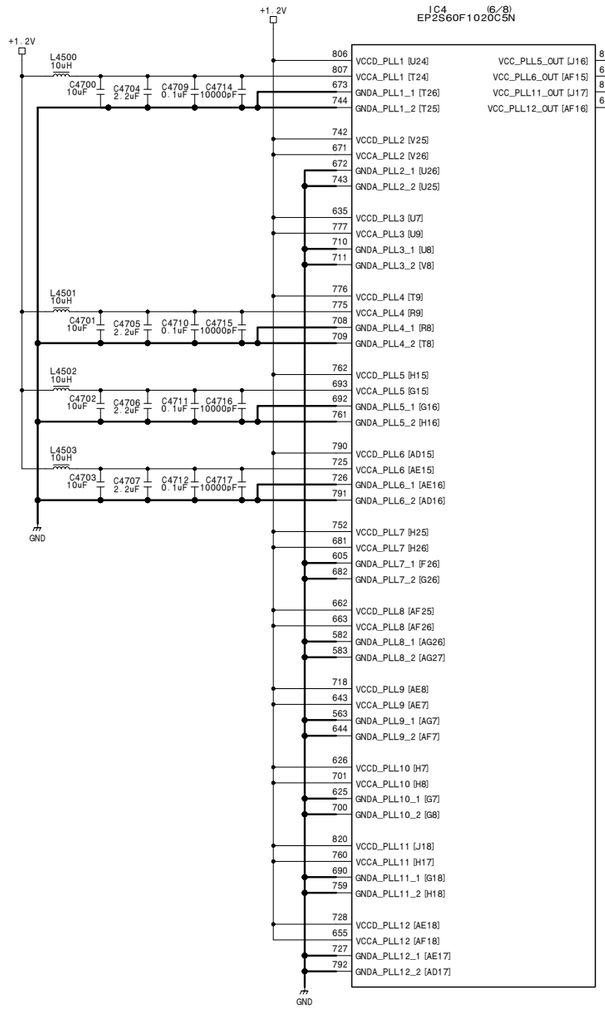

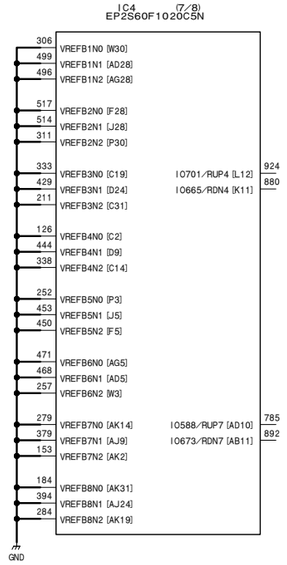

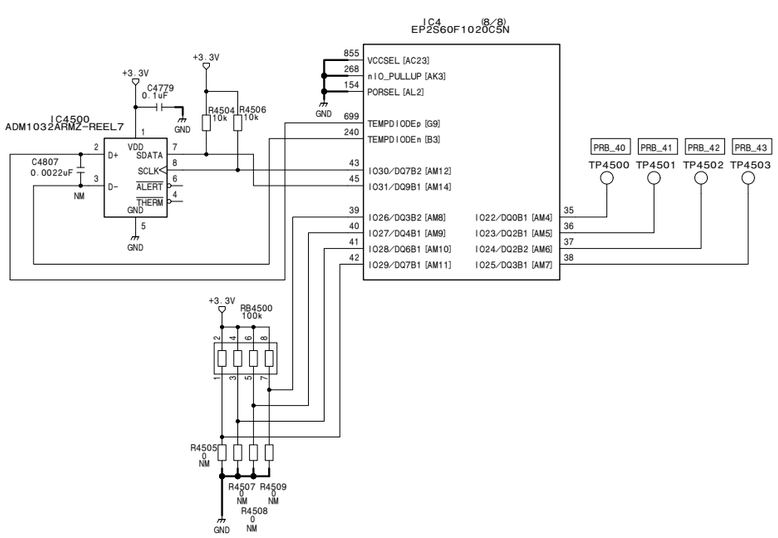

Frame Memory Board
MY-114 (45/45)
BOARD NO. 1-871-701-11
MVS-8000G_MY-114_002_45

OUT-33 (1/35)
SUFFIX: -12

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_L	DC_ENBL	GND (BD_EXT_SLF)	FORMAT	FUSE+12V	GND
6	SLOT7	SLOT6		SLOT5	SLOT4	GND
7	SLOT3	SLOT2	(Reserve_BD_EXT)	SLOT1	SLOT0	GND
8			GND			GND
9			GND			GND
10	SD/ $\overline{\text{HD}}$_1	SD/ $\overline{\text{HD}}$_1	GND		SD/ $\overline{\text{HD}}$	GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND
23			GND			GND
24			GND			GND
25			GND			GND

CNV1

	a	b	c	d	e	FG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5	DMEMON1_0P	DMEMON1_0N	GND	DMEMON1_1P	DMEMON1_1N	GND
6	DMEMON1_2P	DMEMON1_2N	GND	DMEMON1_CKP	DMEMON1_CKN	GND
7	(DMEMON1_3P)	(DMEMON1_3N)	GND	(DMEMON1_4P)	(DMEMON1_4N)	GND
8			GND			GND
9			GND			GND
10			GND			GND
11	DMEMON2_0P	DMEMON2_0N	GND	DMEMON2_1P	DMEMON2_1N	GND
12	DMEMON2_2P	DMEMON2_2N	GND	DMEMON2_CKP	DMEMON2_CKN	GND
13	(DMEMON2_3P)	(DMEMON2_3N)	GND	(DMEMON2_4P)	(DMEMON2_4N)	GND
14			GND			GND
15			GND			GND
16			GND			GND
17			GND			GND
18			GND			GND
19			GND			GND
20			GND			GND
21			GND			GND
22			GND			GND

CNW1

	a	b	c	d	e	FG
1			GND			GND
2	FC1_HFCKP	FC1_HFCKN	GND	FC2_HFCKP	FC2_HFCKN	GND
3	FC1_CKXP	FC1_CKXN	GND	FC2_CKXP	FC2_CKXN	GND
4	FC1_VDP	FC1_VDN	GND	FC2_VDP	FC2_VDN	GND
5	FC1_HDP	FC1_HDN	GND	FC2_HDP	FC2_HDN	GND
6	FC1_FLOEP	FC1_FLOEN	GND	FC2_FLOEP	FC2_FLOEN	GND
7			GND			GND
8	DOUT12P	DOUT12N	GND	DOUT24P	DOUT24N	GND
9	DOUT11P	DOUT11N	GND	DOUT23P	DOUT23N	GND
10	DOUT10P	DOUT10N	GND	DOUT22P	DOUT22N	GND
11	DOUT9P	DOUT9N	GND	DOUT21P	DOUT21N	GND
12						GND
13						GND
14						GND
15	DOUT8P	DOUT8N	GND	DOUT20P	DOUT20N	GND
16	DOUT7P	DOUT7N	GND	DOUT19P	DOUT19N	GND
17	DOUT6P	DOUT6N	GND	DOUT18P	DOUT18N	GND
18	DOUT5P	DOUT5N	GND	DOUT17P	DOUT17N	GND
19	DOUT4P	DOUT4N	GND	DOUT16P	DOUT16N	GND
20	DOUT3P	DOUT3N	GND	DOUT15P	DOUT15N	GND
21	DOUT2P	DOUT2N	GND	DOUT14P	DOUT14N	GND
22	DOUT1P	DOUT1N	GND	DOUT13P	DOUT13N	GND
23	DWE_INETWTAP	DWE_INETWTAN	GND	DWE_INETWTBP	DWE_INETWTBN	GND
24	INETWTAP	INETWTAN	GND	INETWTBP	INETWTBN	GND
25			GND			GND

CNX1


	a	b	c	d	e	FG
1	SDO11P	SDO11N	GND	SDO12P	SDO12N	GND
2			GND			GND
3	SDO9P	SDO9N	GND	SDO10P	SDO10N	GND
4			GND			GND
5	SDO7P	SDO7N	GND	SDO8P	SDO8N	GND
6			GND			GND
7	SDO5P	SDO5N	GND	SDO6P	SDO6N	GND
8			GND			GND
9	SDO3P	SDO3N	GND	SDO4P	SDO4N	GND
10	SDO_FCV1P	SDO_FCV1N	GND	SDO_FCV2P	SDO_FCV2N	GND
11	SDO1P	SDO1N	GND	SDO2P	SDO2N	GND
12						GND
13						GND
14						GND
15	SDO23P	SDO23N	GND	SDO24P	SDO24N	GND
16			GND			GND
17	SDO21P	SDO21N	GND	SDO22P	SDO22N	GND
18			GND			GND
19	SDO19P	SDO19N	GND	SDO20P	SDO20N	GND
20			GND			GND
21	SDO17P	SDO17N	GND	SDO18P	SDO18N	GND
22			GND			GND
23	SDO15P	SDO15N	GND	SDO16P	SDO16N	GND
24			GND			GND
25	SDO13P	SDO13N	GND	SDO14P	SDO14N	GND


CNZ1


	a	b	c	d	e	FG
1	(DMEUT1L1VP)	(DMEUT1L1VN)	GND	(DMEUT1L2VP)	(DMEUT1L2VN)	GND
2	(DMEMON1AP)	(DMEMON1AN)	GND	(DMEMON2AP)	(DMEMON2AN)	GND
3	PBUSOUT01	PBUSOUT02	GND	PBUSOUT03	PBUSOUT04	GND
4	PBUSOUT05	PBUSOUT06	GND	PBUSOUT07	PBUSOUT08	GND
5	PBUSOUT09	PBUSOUT10	GND	PBUSOUT11	PBUSOUT12	GND
6	PBUSOUT13	PBUSOUT14	GND	PBUSOUT15	PBUSOUT16	GND
7	PBUSOUT17	PBUSOUT18	GND	PBUSOUT19	PBUSOUT20	GND
8	PBUSOUT21	PBUSOUT22	GND	PBUSOUT23	PBUSOUT24	GND
9	PBUSOUT25	PBUSOUT26	GND	PBUSOUT27	PBUSOUT28	GND
10	PBUSOUT29	PBUSOUT30	GND	PBUSOUT31	PBUSOUT32	GND
11	PBUSOUT33	PBUSOUT34	GND	PBUSOUT35	PBUSOUT36	GND
12						GND
13						GND
14						GND
15	PBUSOUT37	PBUSOUT38	GND	PBUSOUT39	PBUSOUT40	GND
16	PBUSOUT41	PBUSOUT42	GND	PBUSOUT43	PBUSOUT44	GND
17	PBUSOUT45	PBUSOUT46	GND	PBUSOUT47	PBUSOUT48	GND
18	PBUSOUT49	PBUSOUT50	GND	PBUSOUT51	PBUSOUT52	GND
19	PBUSOUT53	PBUSOUT54	GND	PBUSOUT55	PBUSOUT56	GND
20	PBUSOUT57	PBUSOUT58	GND	PBUSOUT59	PBUSOUT60	GND
21			GND			GND
22			GND			GND
23			GND	HFCKP	HFCKN	GND
24	HDP	HDN	GND	CKXP	CKXN	GND
25	FLOEP	FLOEN	GND	VDP	VDN	GND


Output Board
OUT-33 (1/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_1

OUT-33 (2/35)
SUFFIX: -12

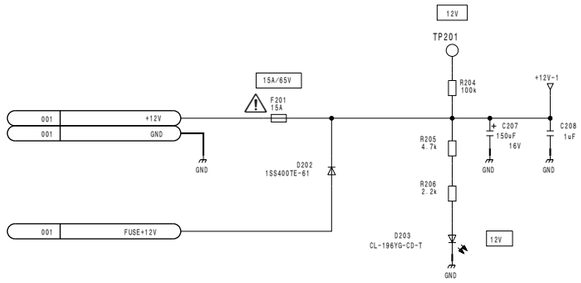

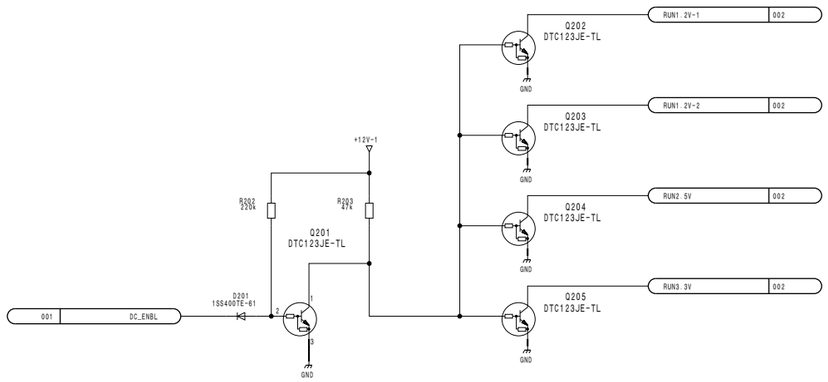


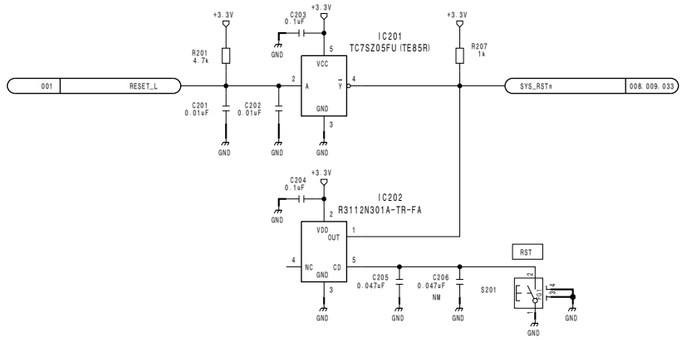

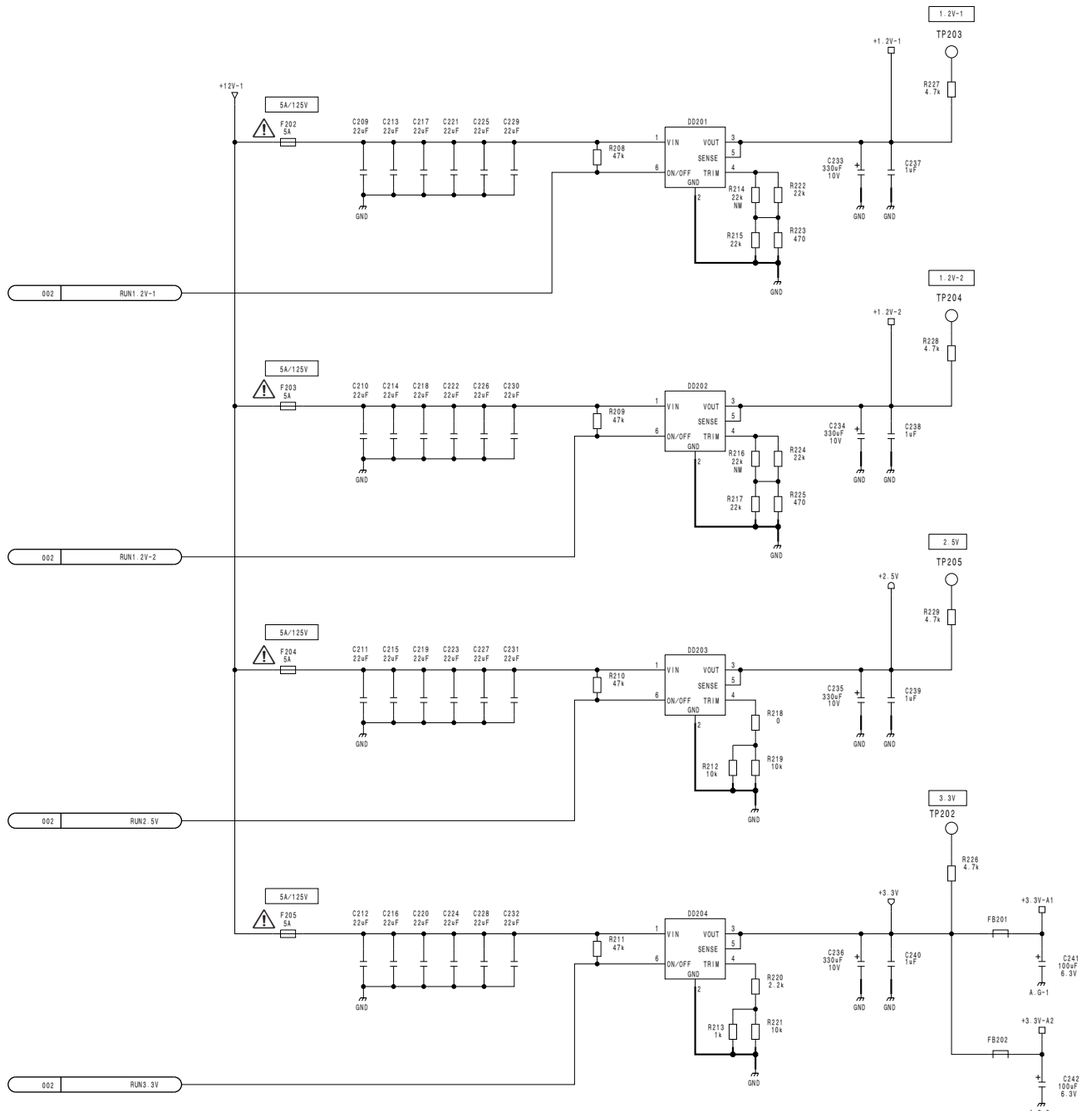

Output Board
OUT-33 (2/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_2


OUT-33 (3/35)
SUFFIX: -12

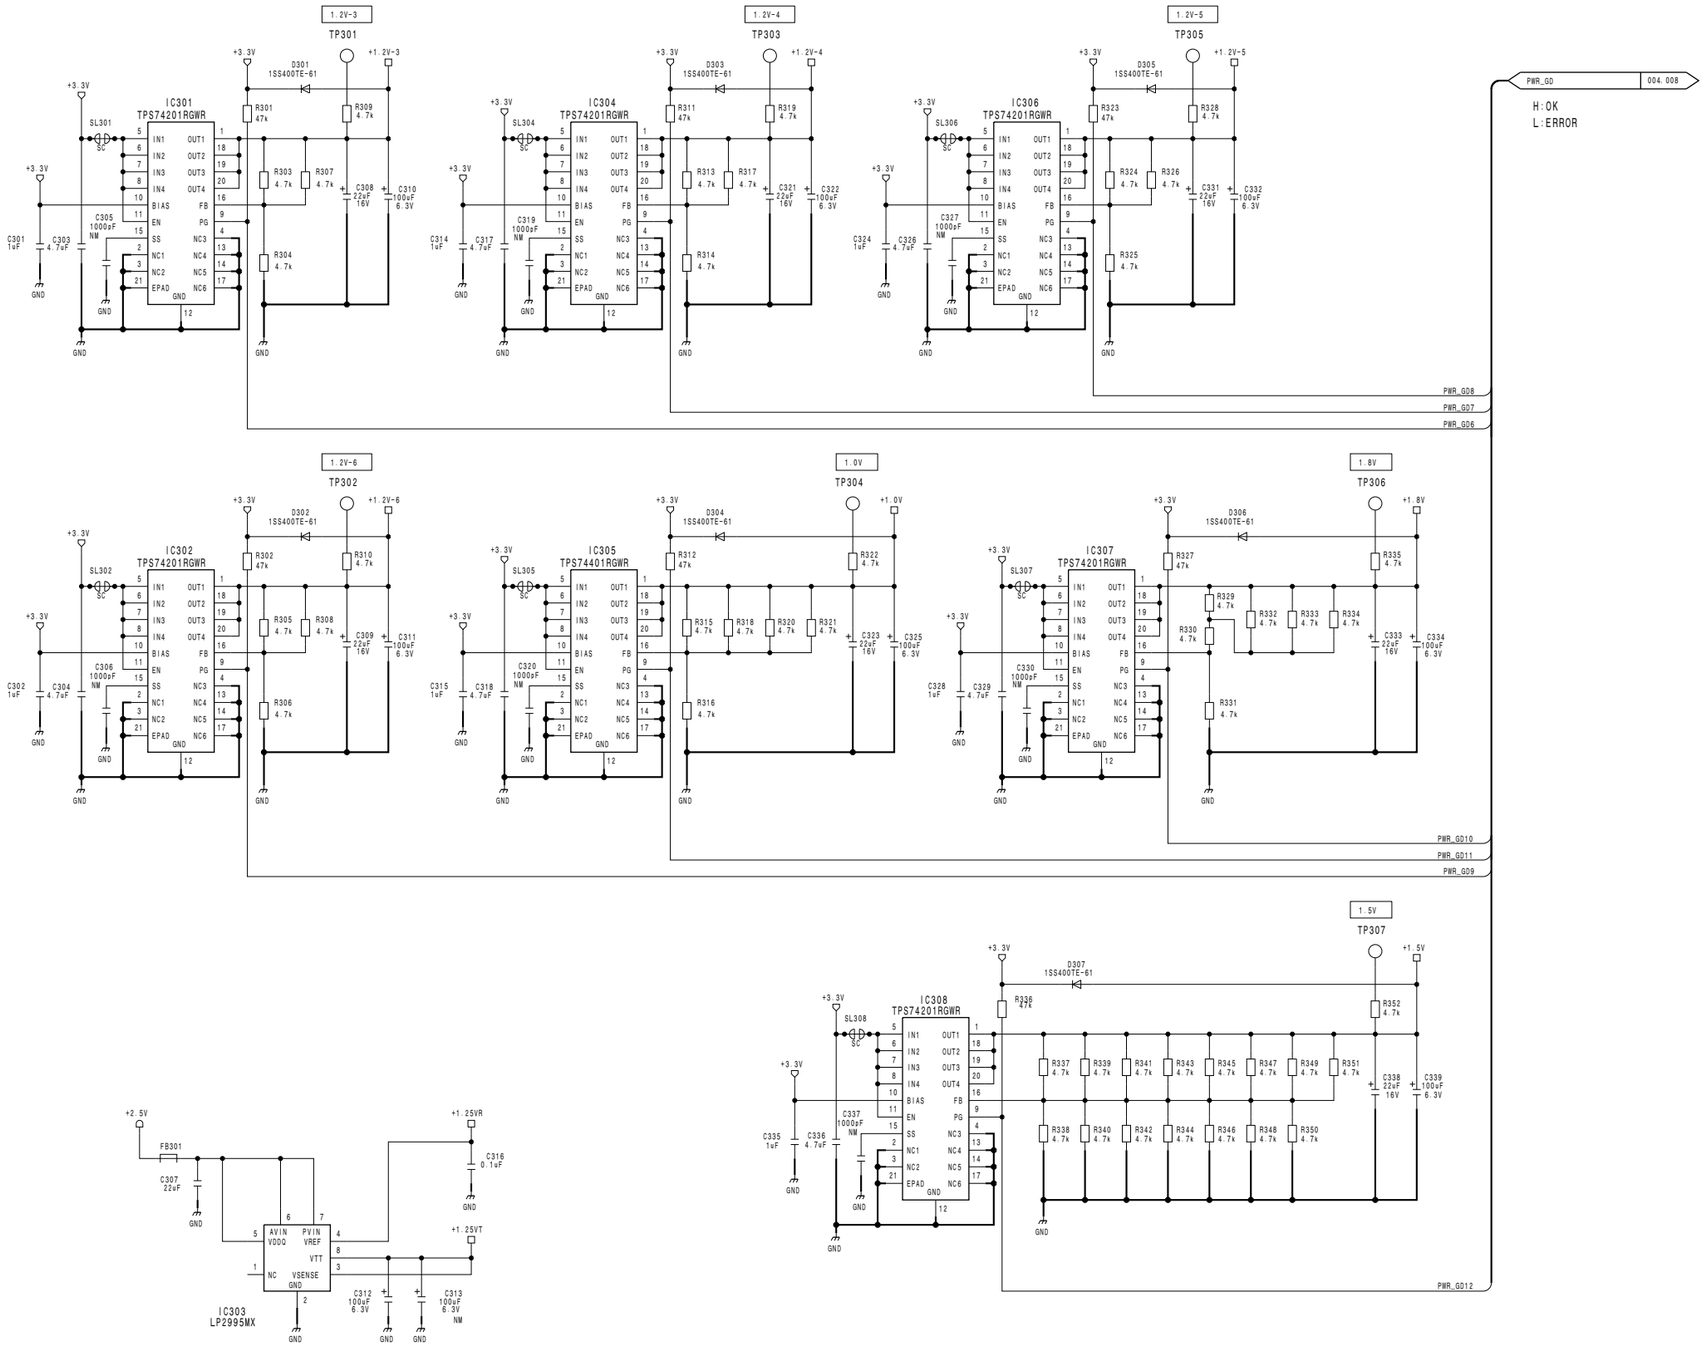



Output Board
OUT-33 (3/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_3


OUT-33 (4/35)
SUFFIX: -12


OUT-33 (4/35)
SUFFIX: -12

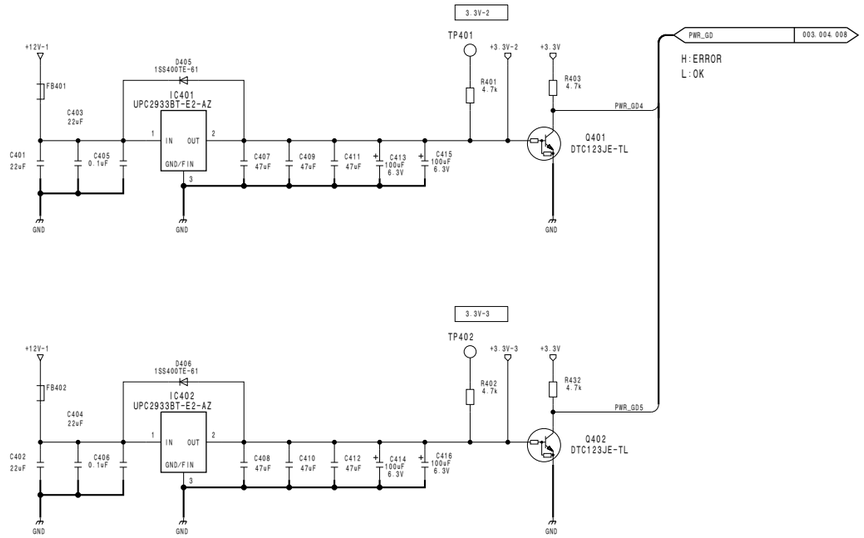

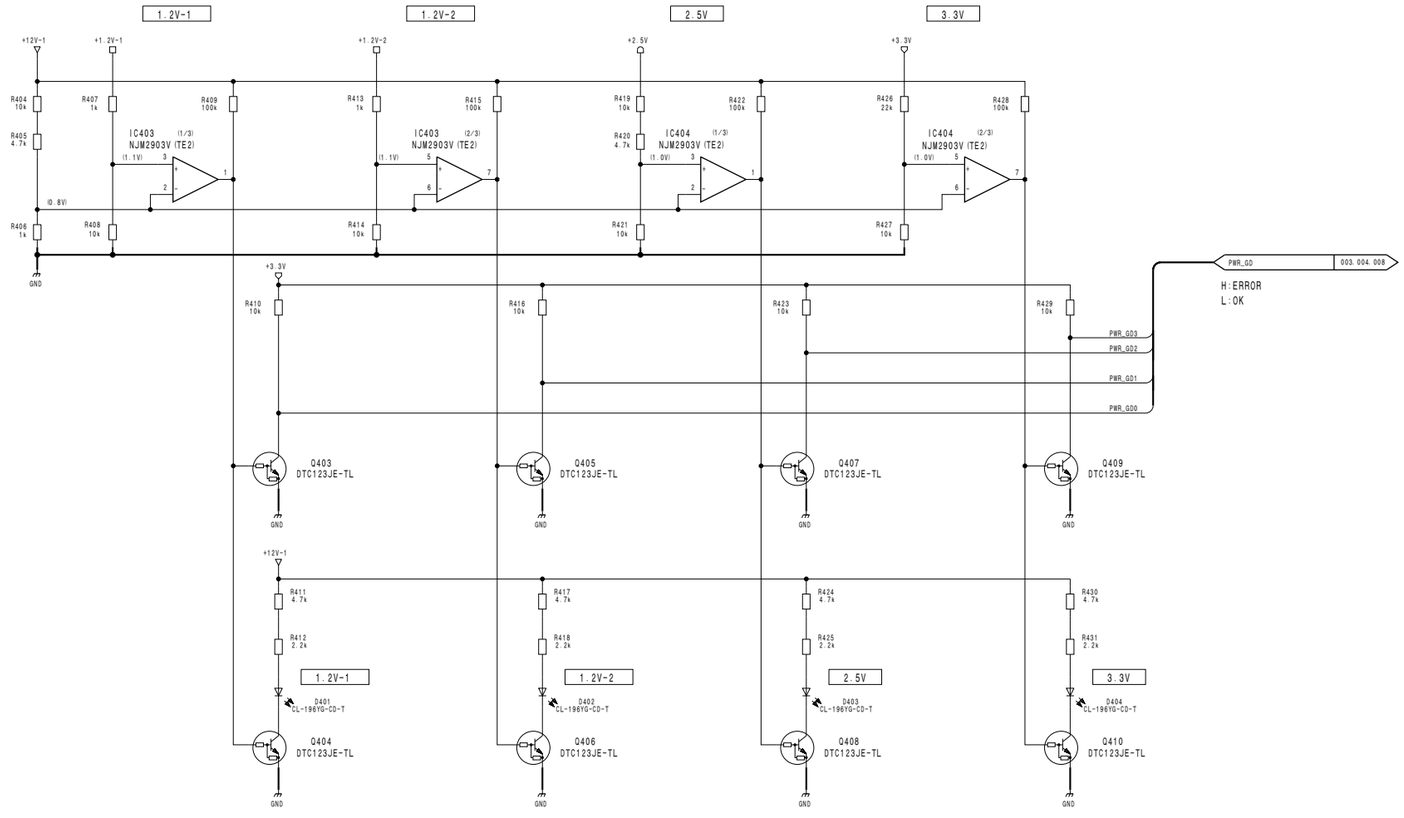









Output Board
OUT-33 (4/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_4

OUT-33 (5/35)
SUFFIX: -12

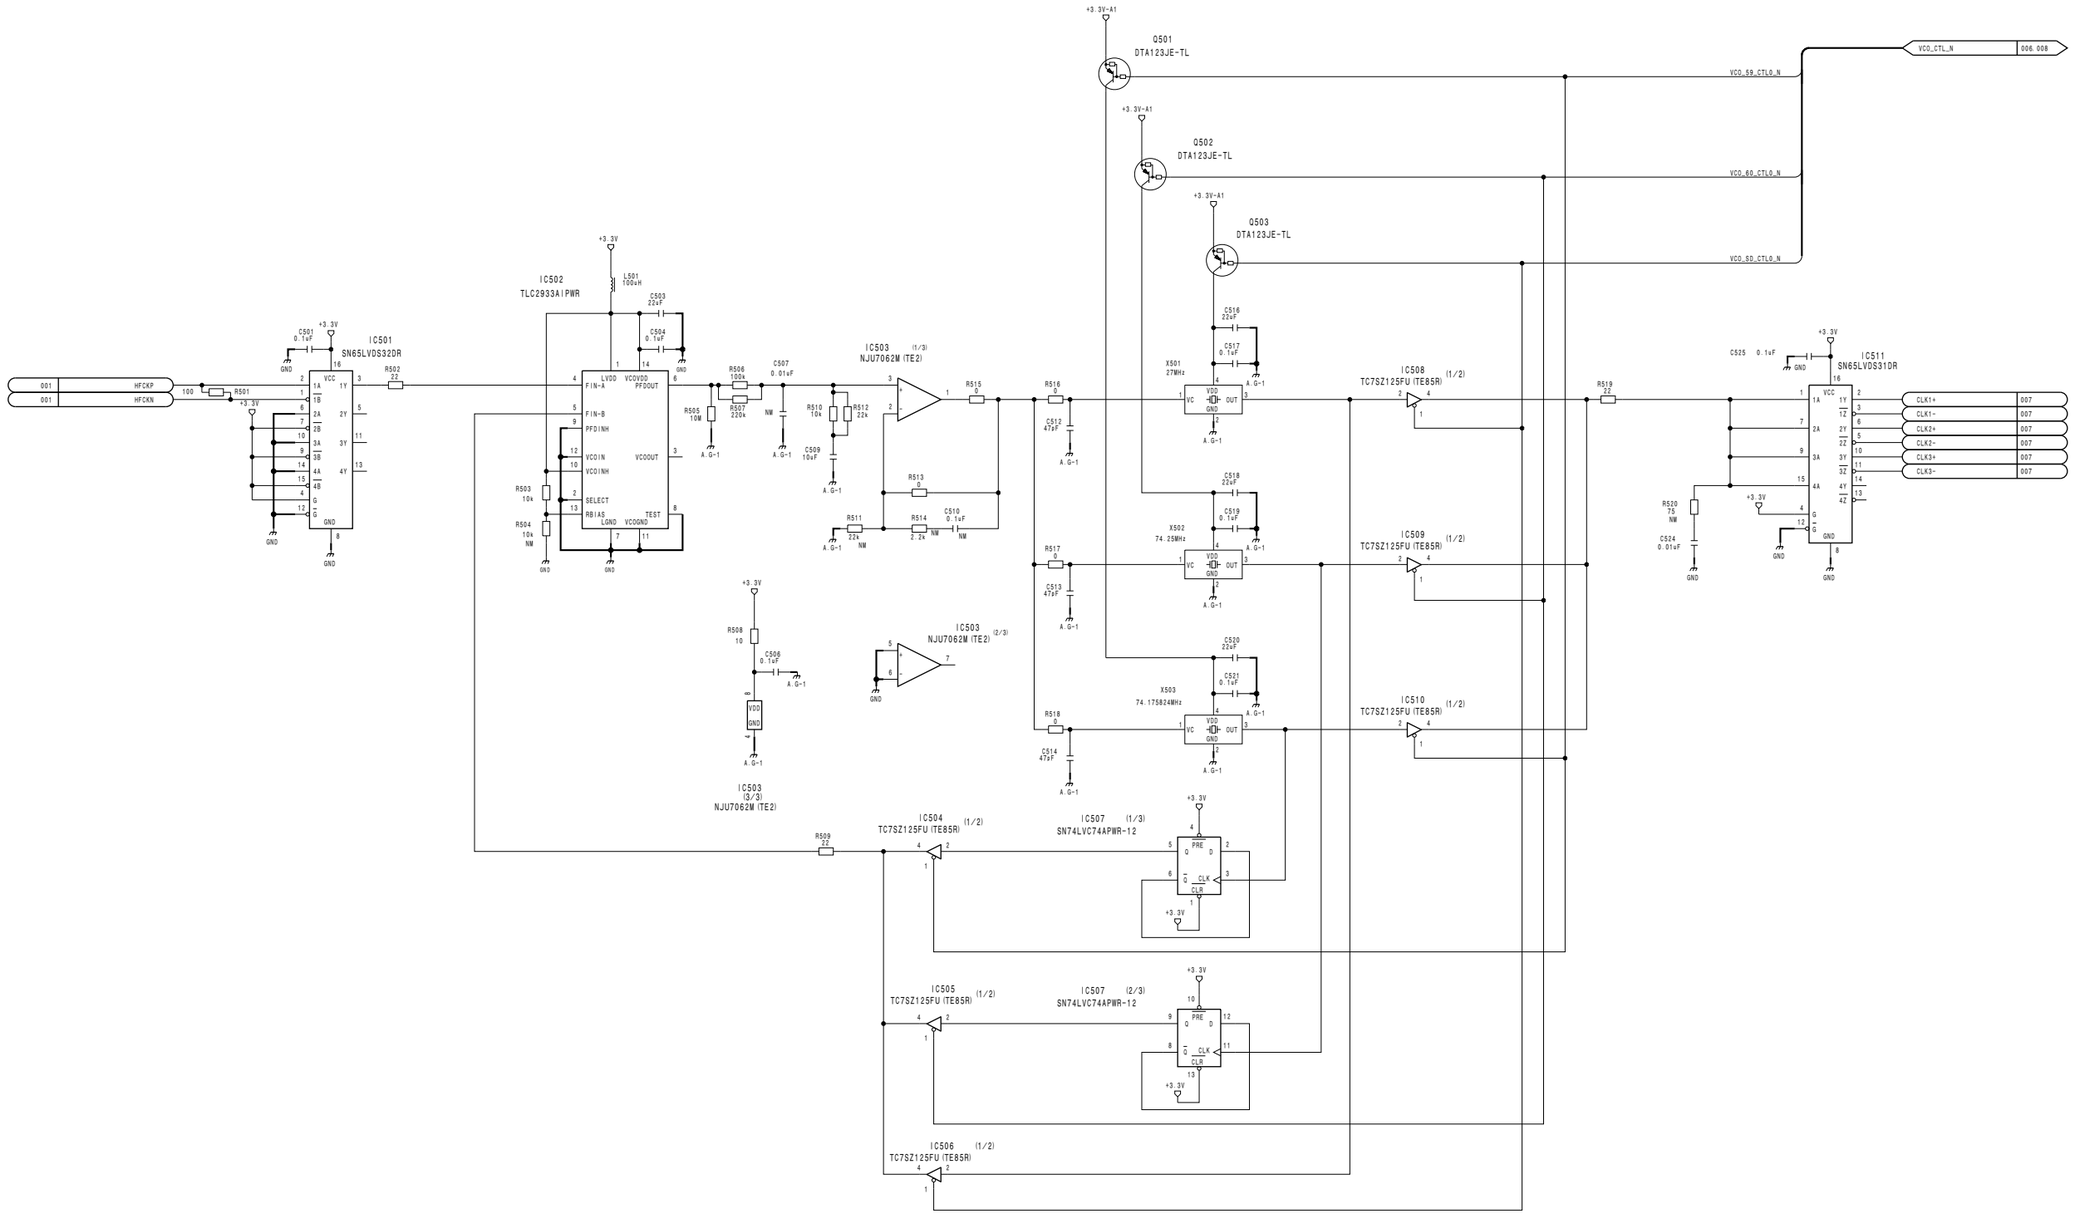


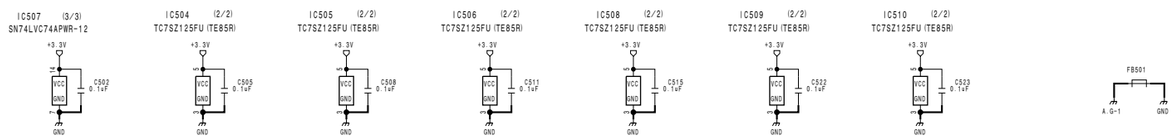


Output Board
OUT-33 (5/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_5

4-242

OUT-33 (6/35)
SUFFIX: -12

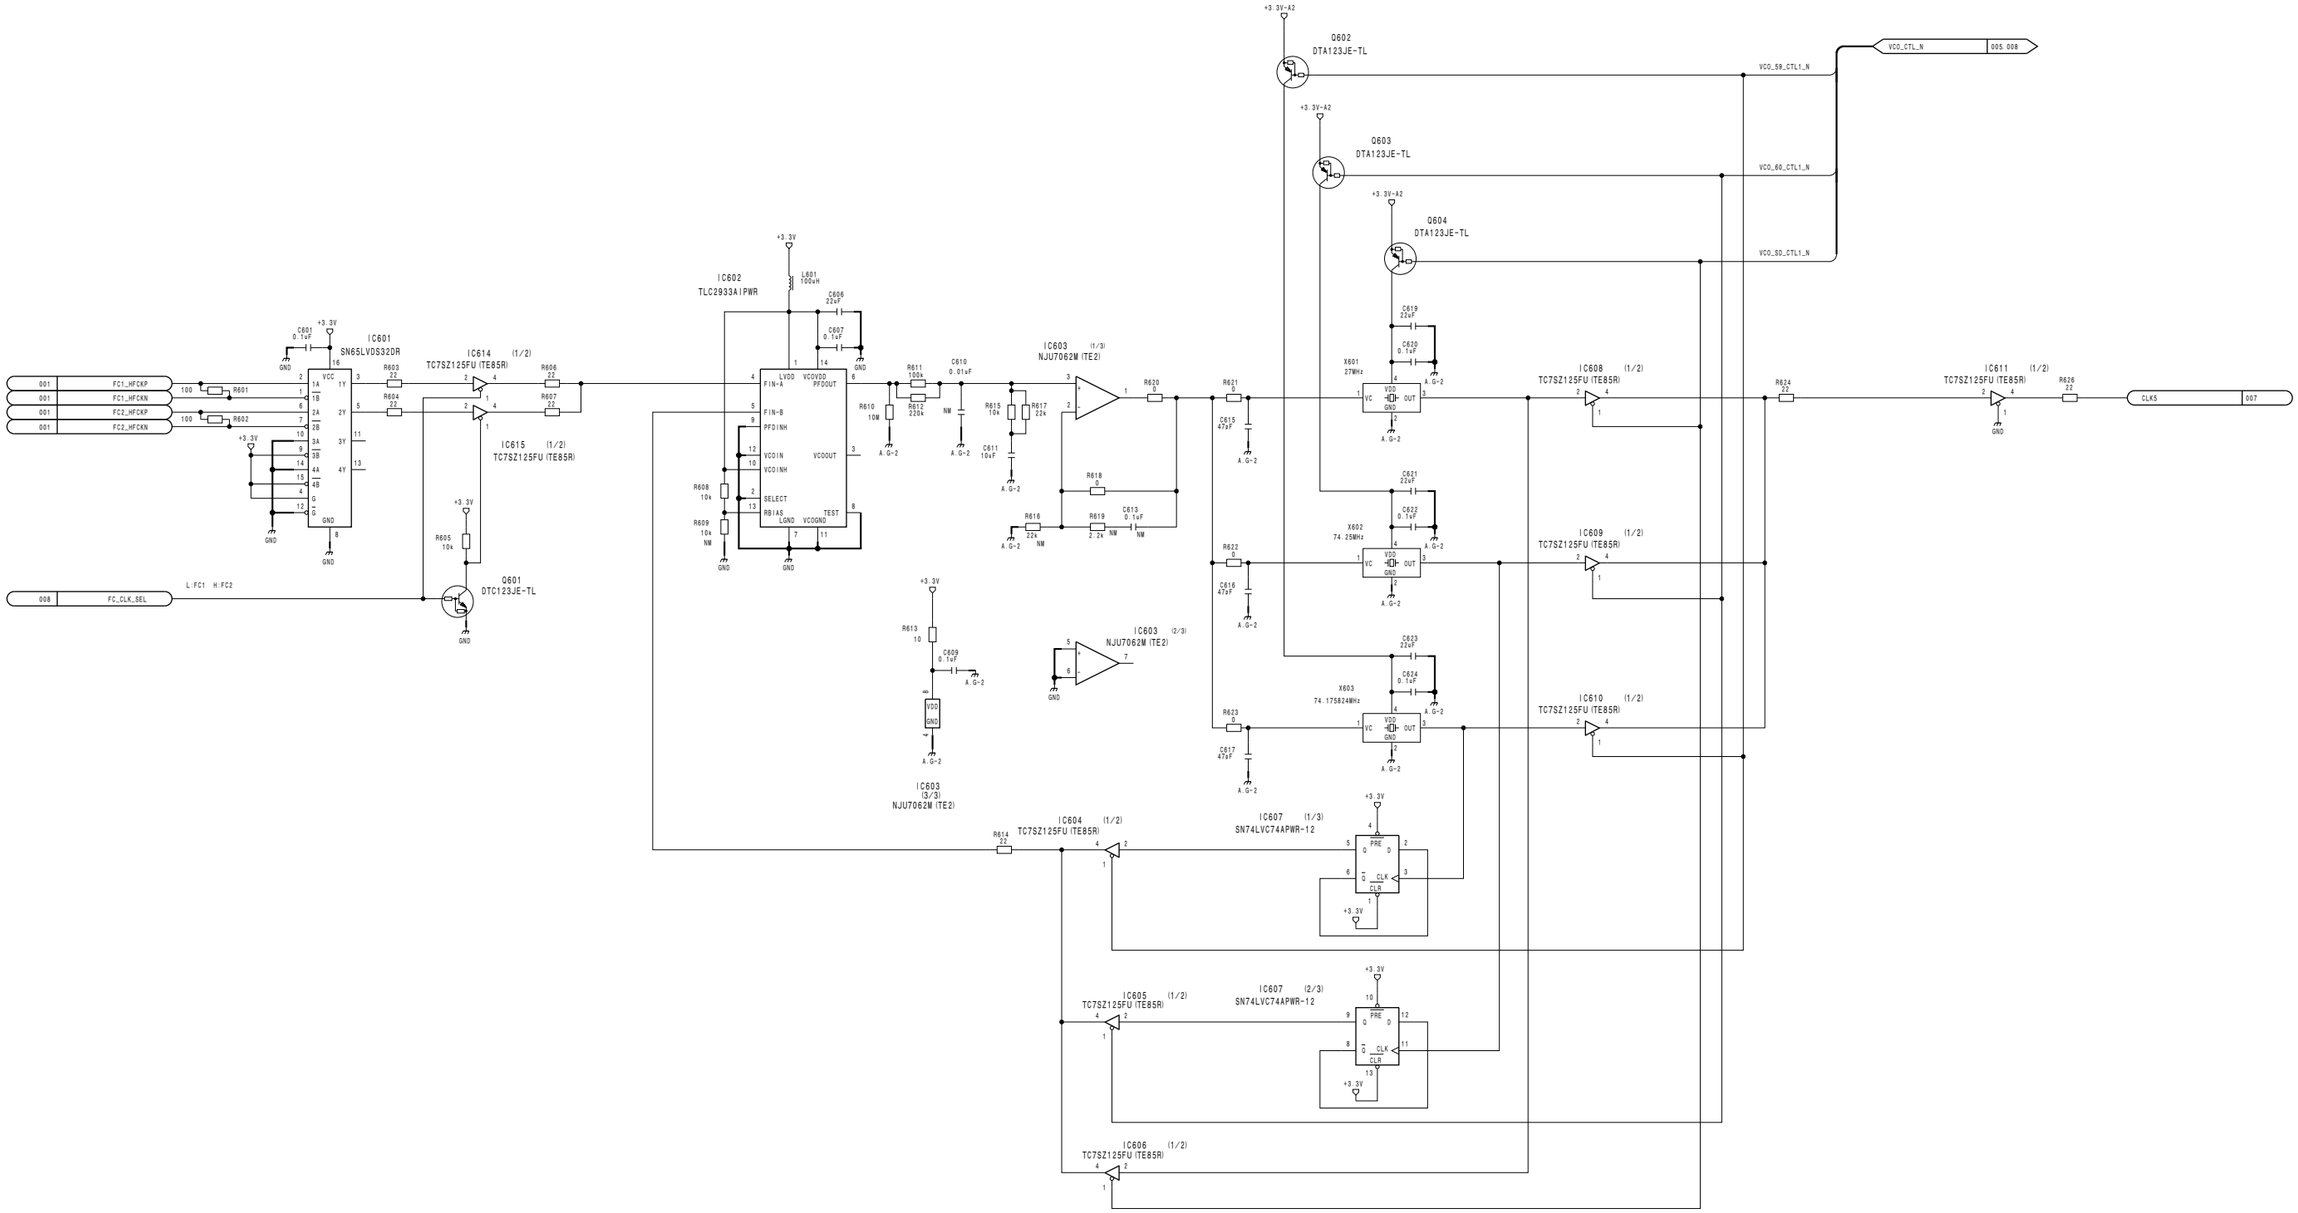

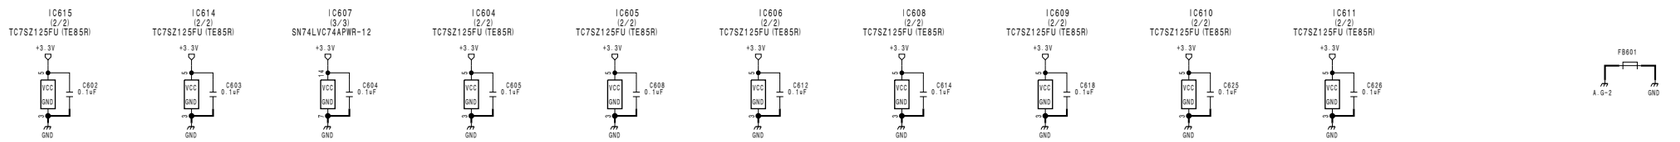

Output Board
OUT-33 (6/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_6


OUT-33 (7/35)
SUFFIX: -12

Output Board
OUT-33 (7/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_7

OUT-33 (8/35) **SUFFIX: -12**


CPU I/F

DEV CTL

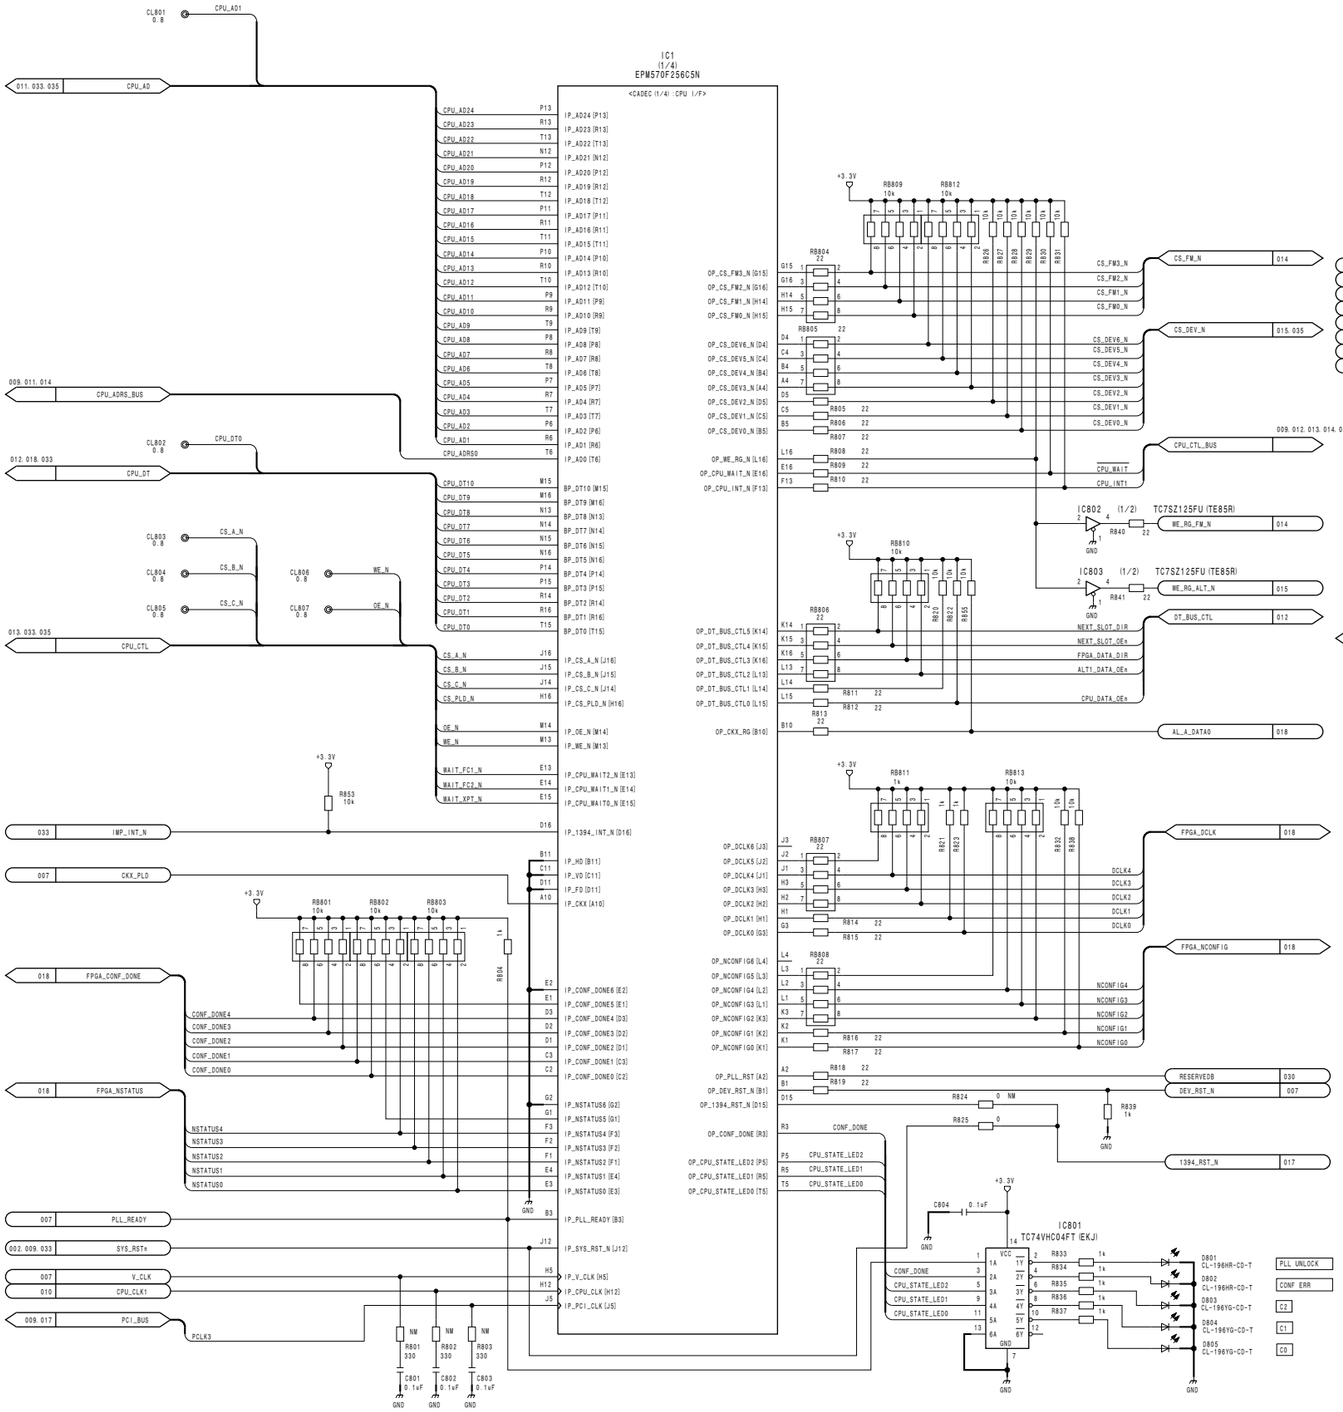


Output Board
OUT-33 (8/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_8

OUT-33 (9/35)
SUFFIX: -12

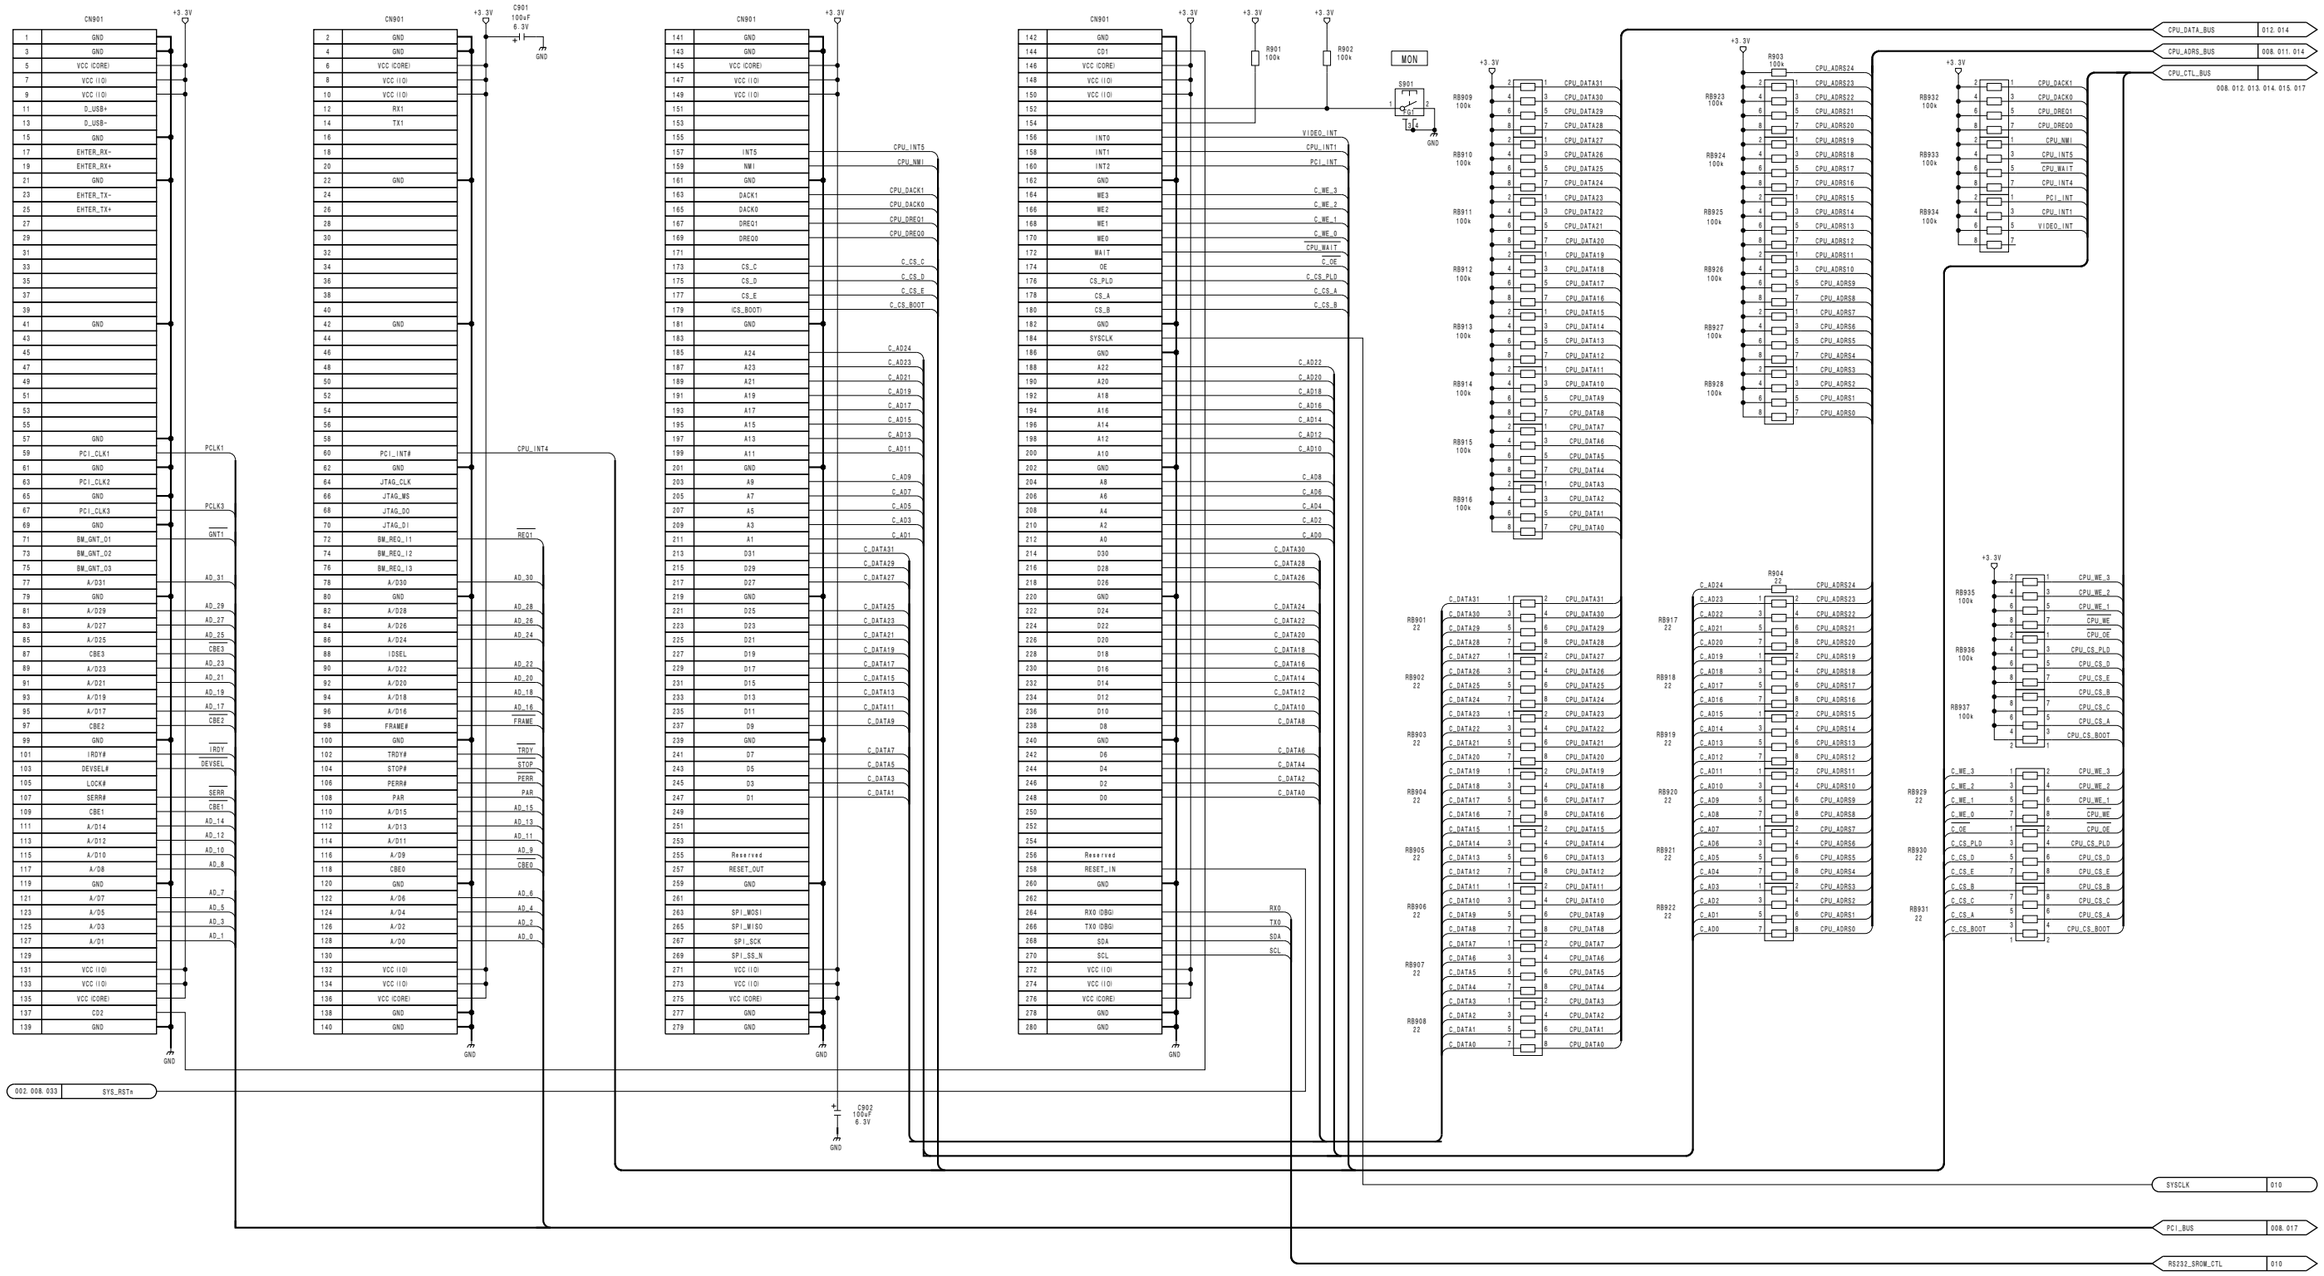


Output Board
OUT-33 (9/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_9

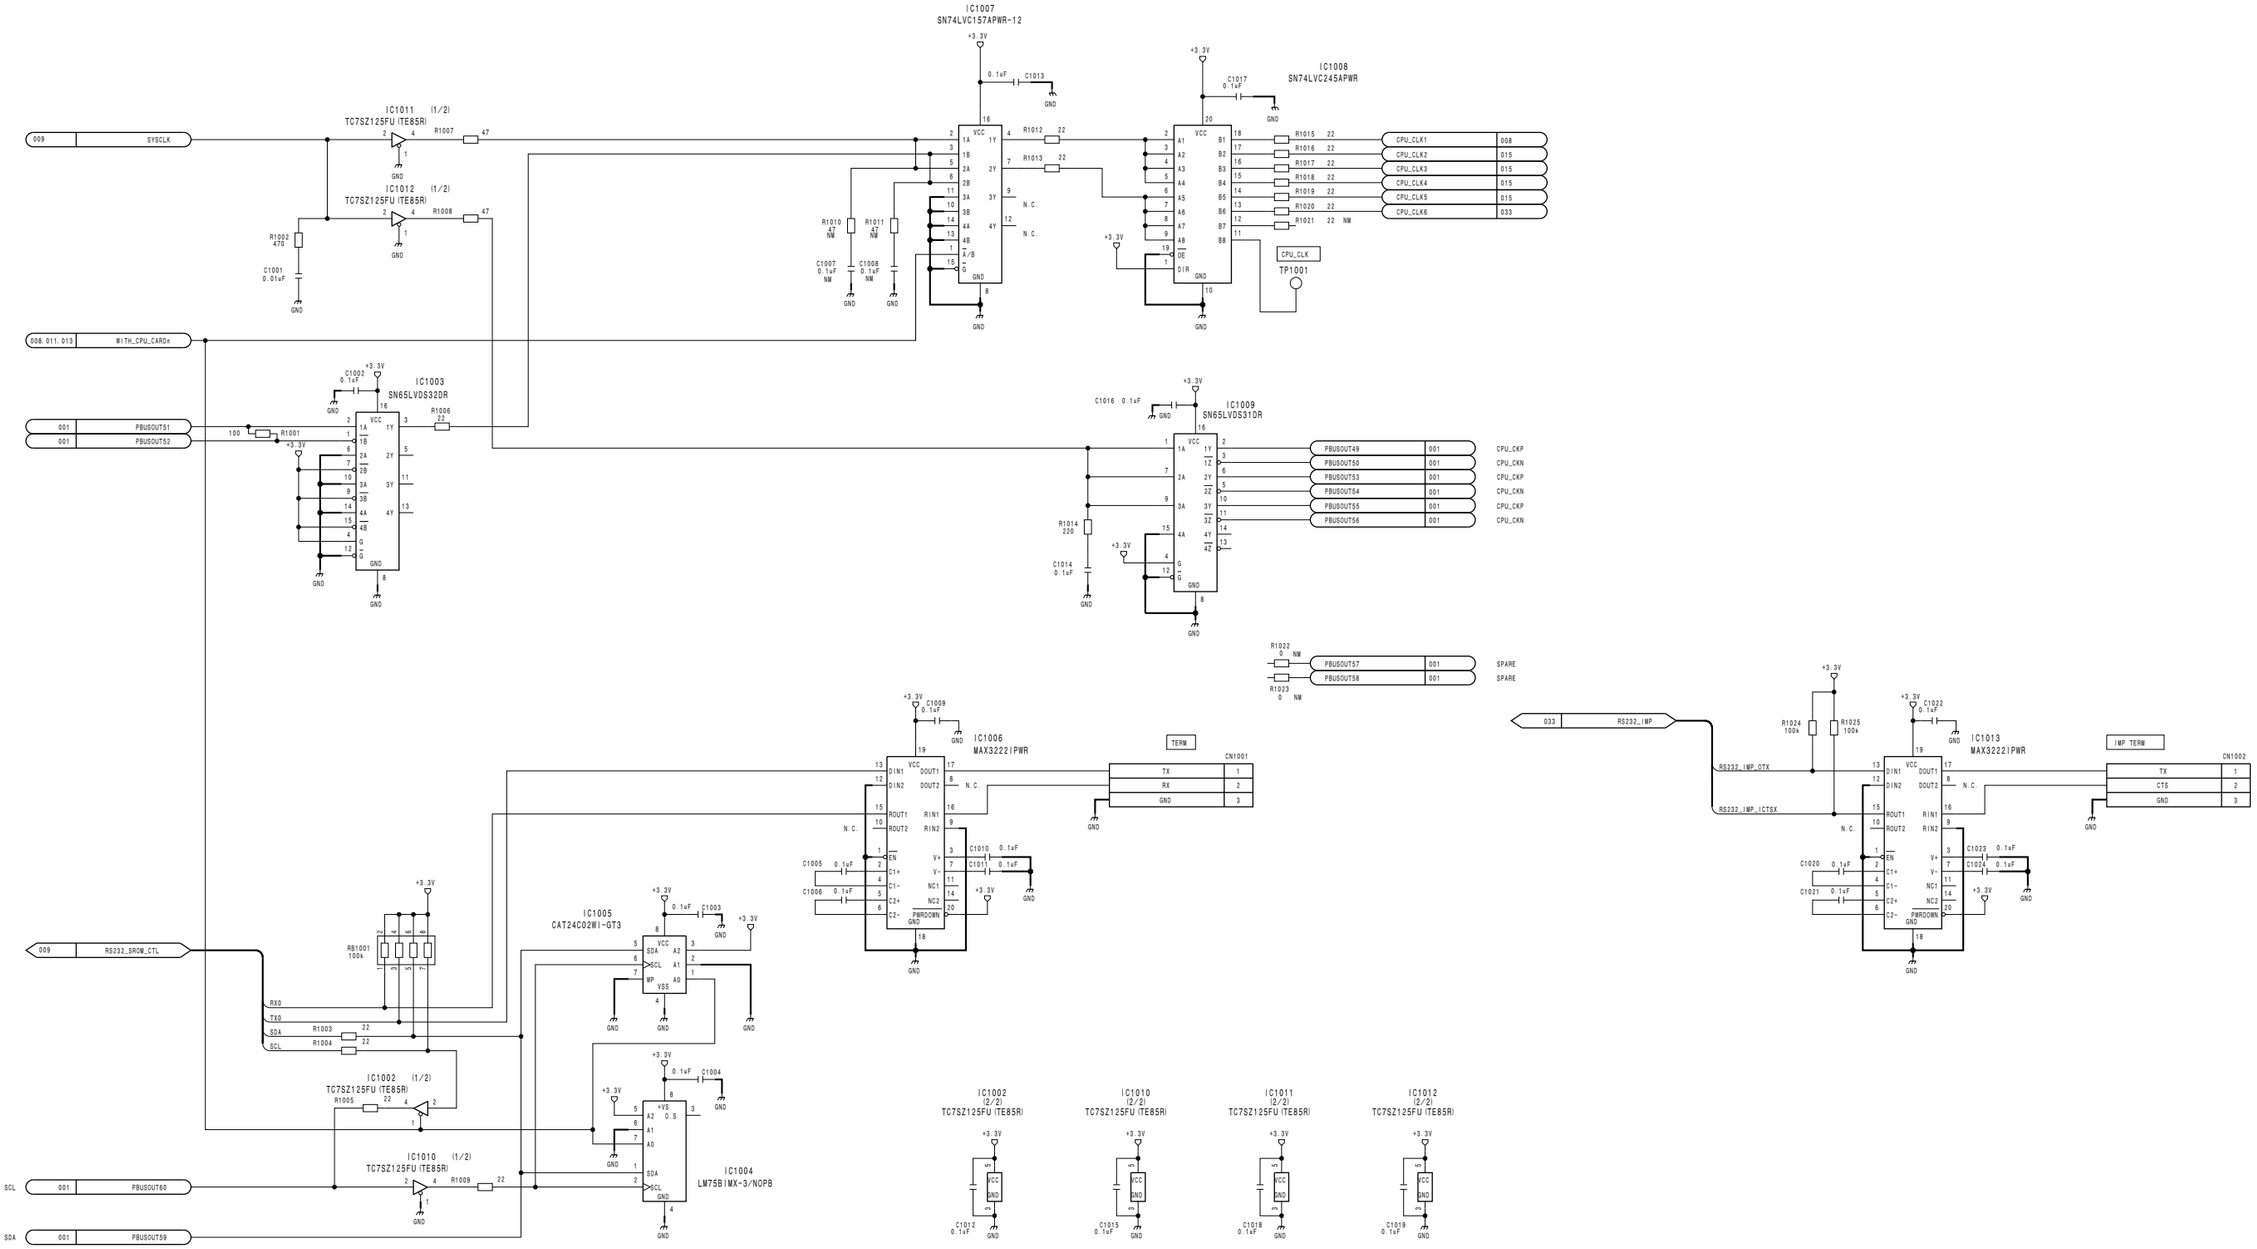

Output Board
OUT-33 (10/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_10


OUT-33 (11/35)
SUFFIX: -12

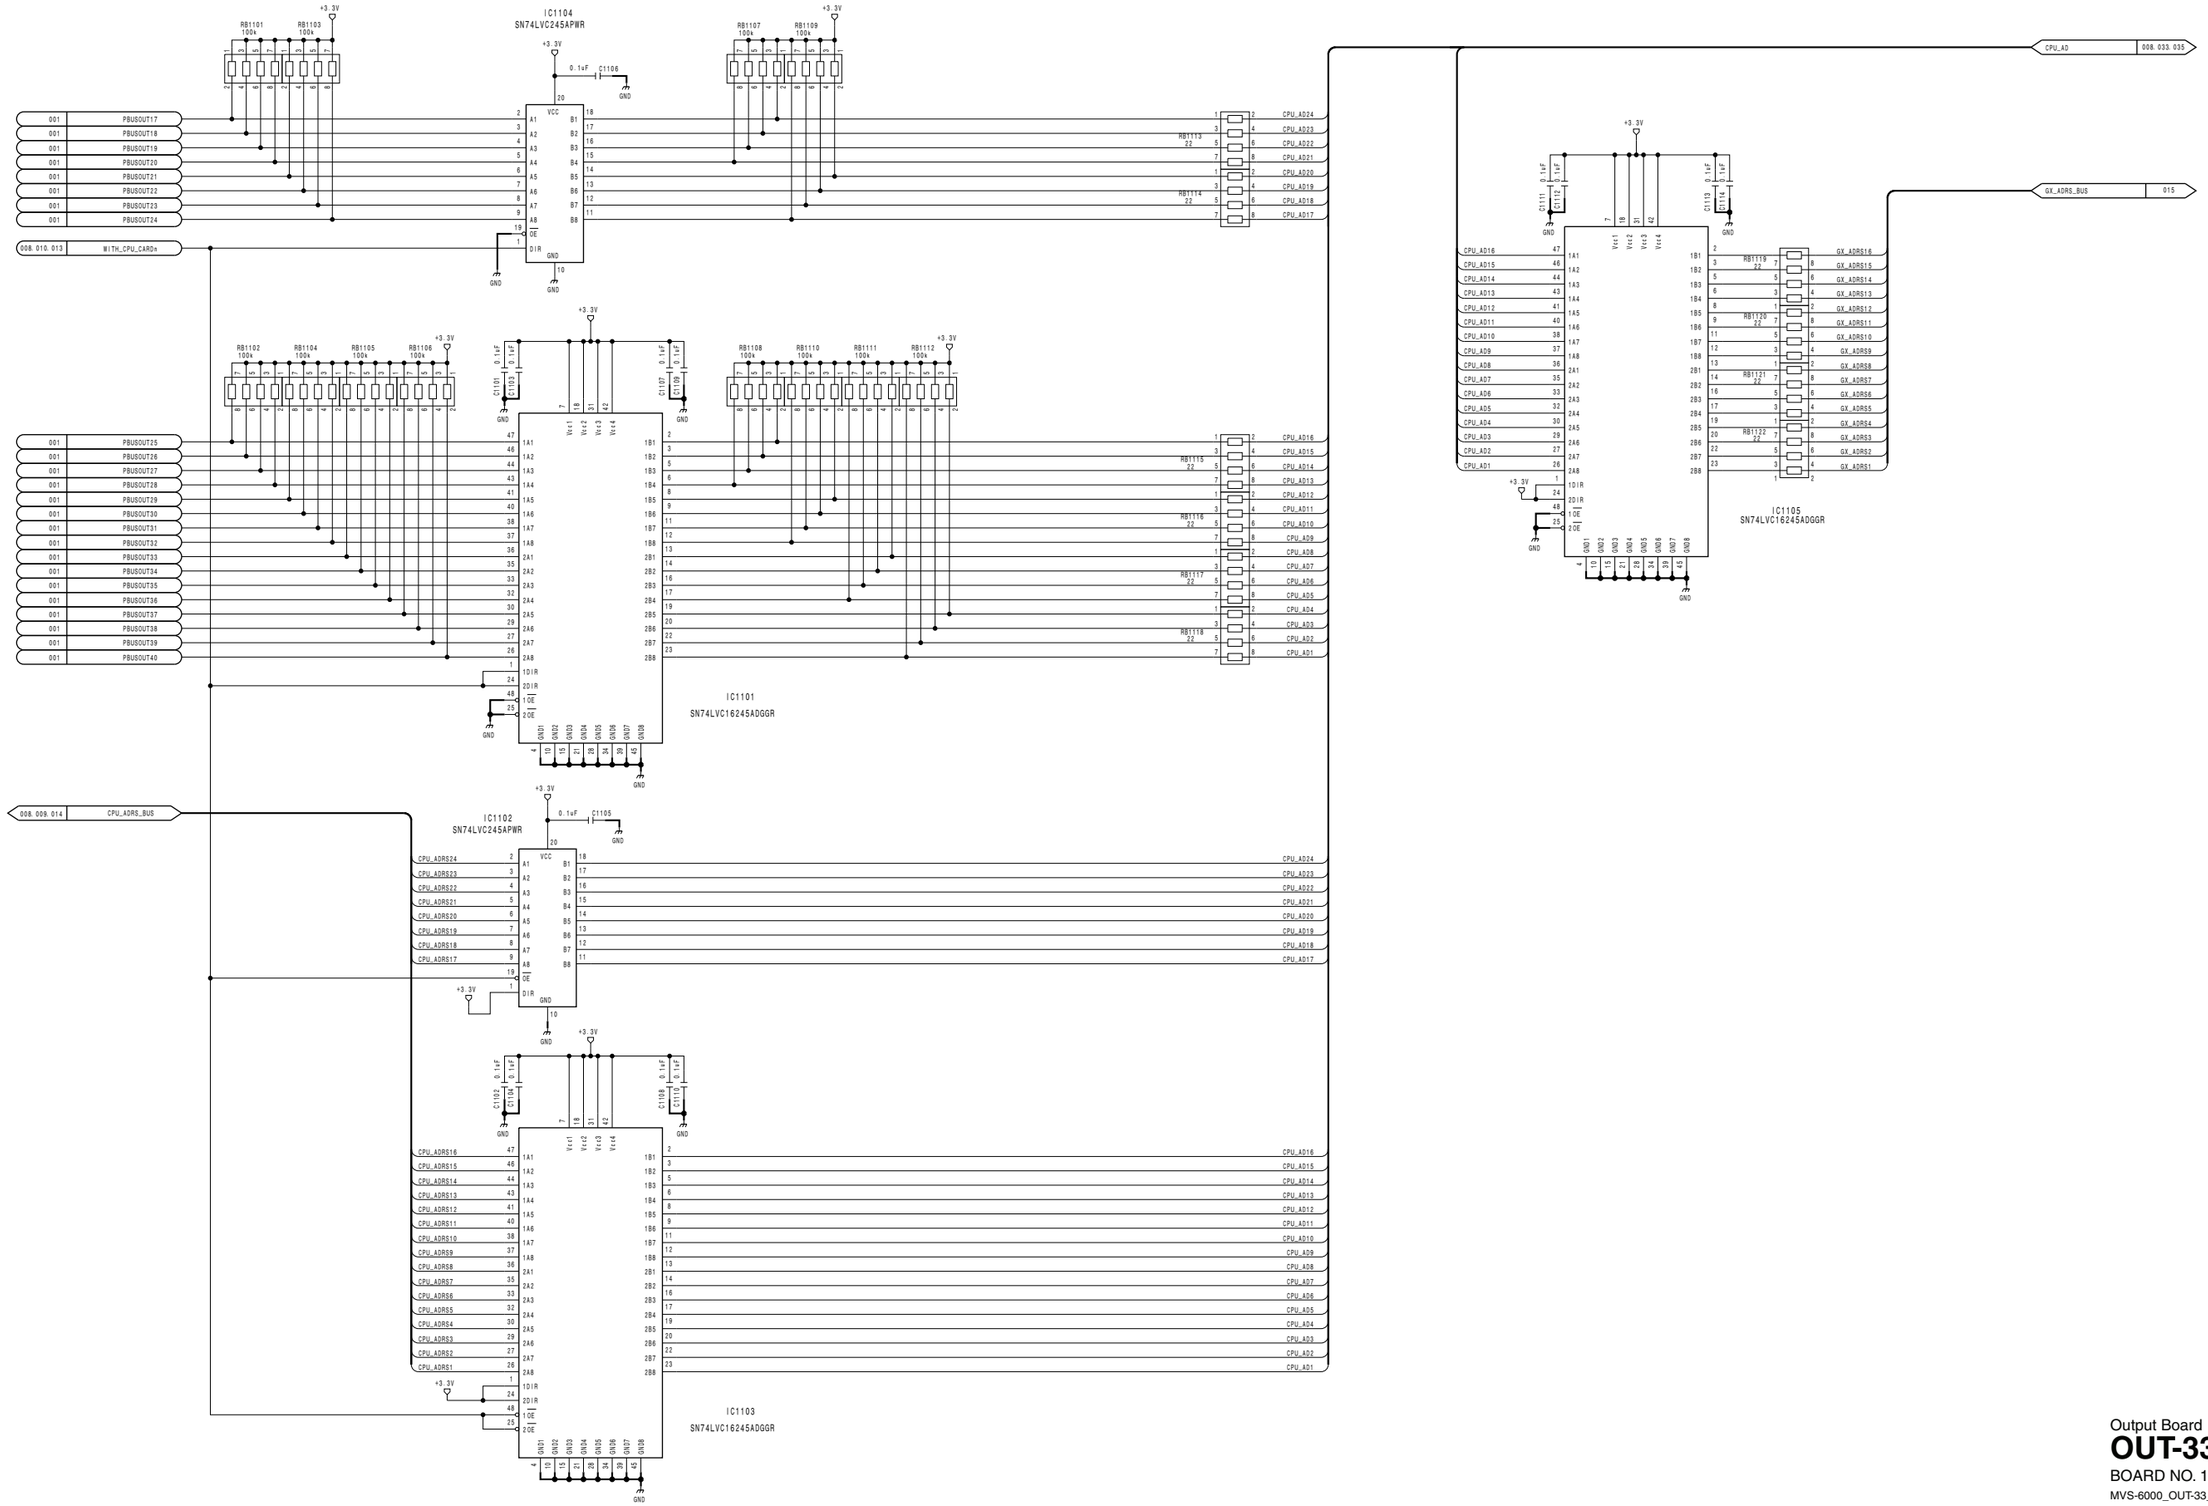

4-248


Output Board
OUT-33 (11/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_11

OUT-33 (12/35)
SUFFIX: -12

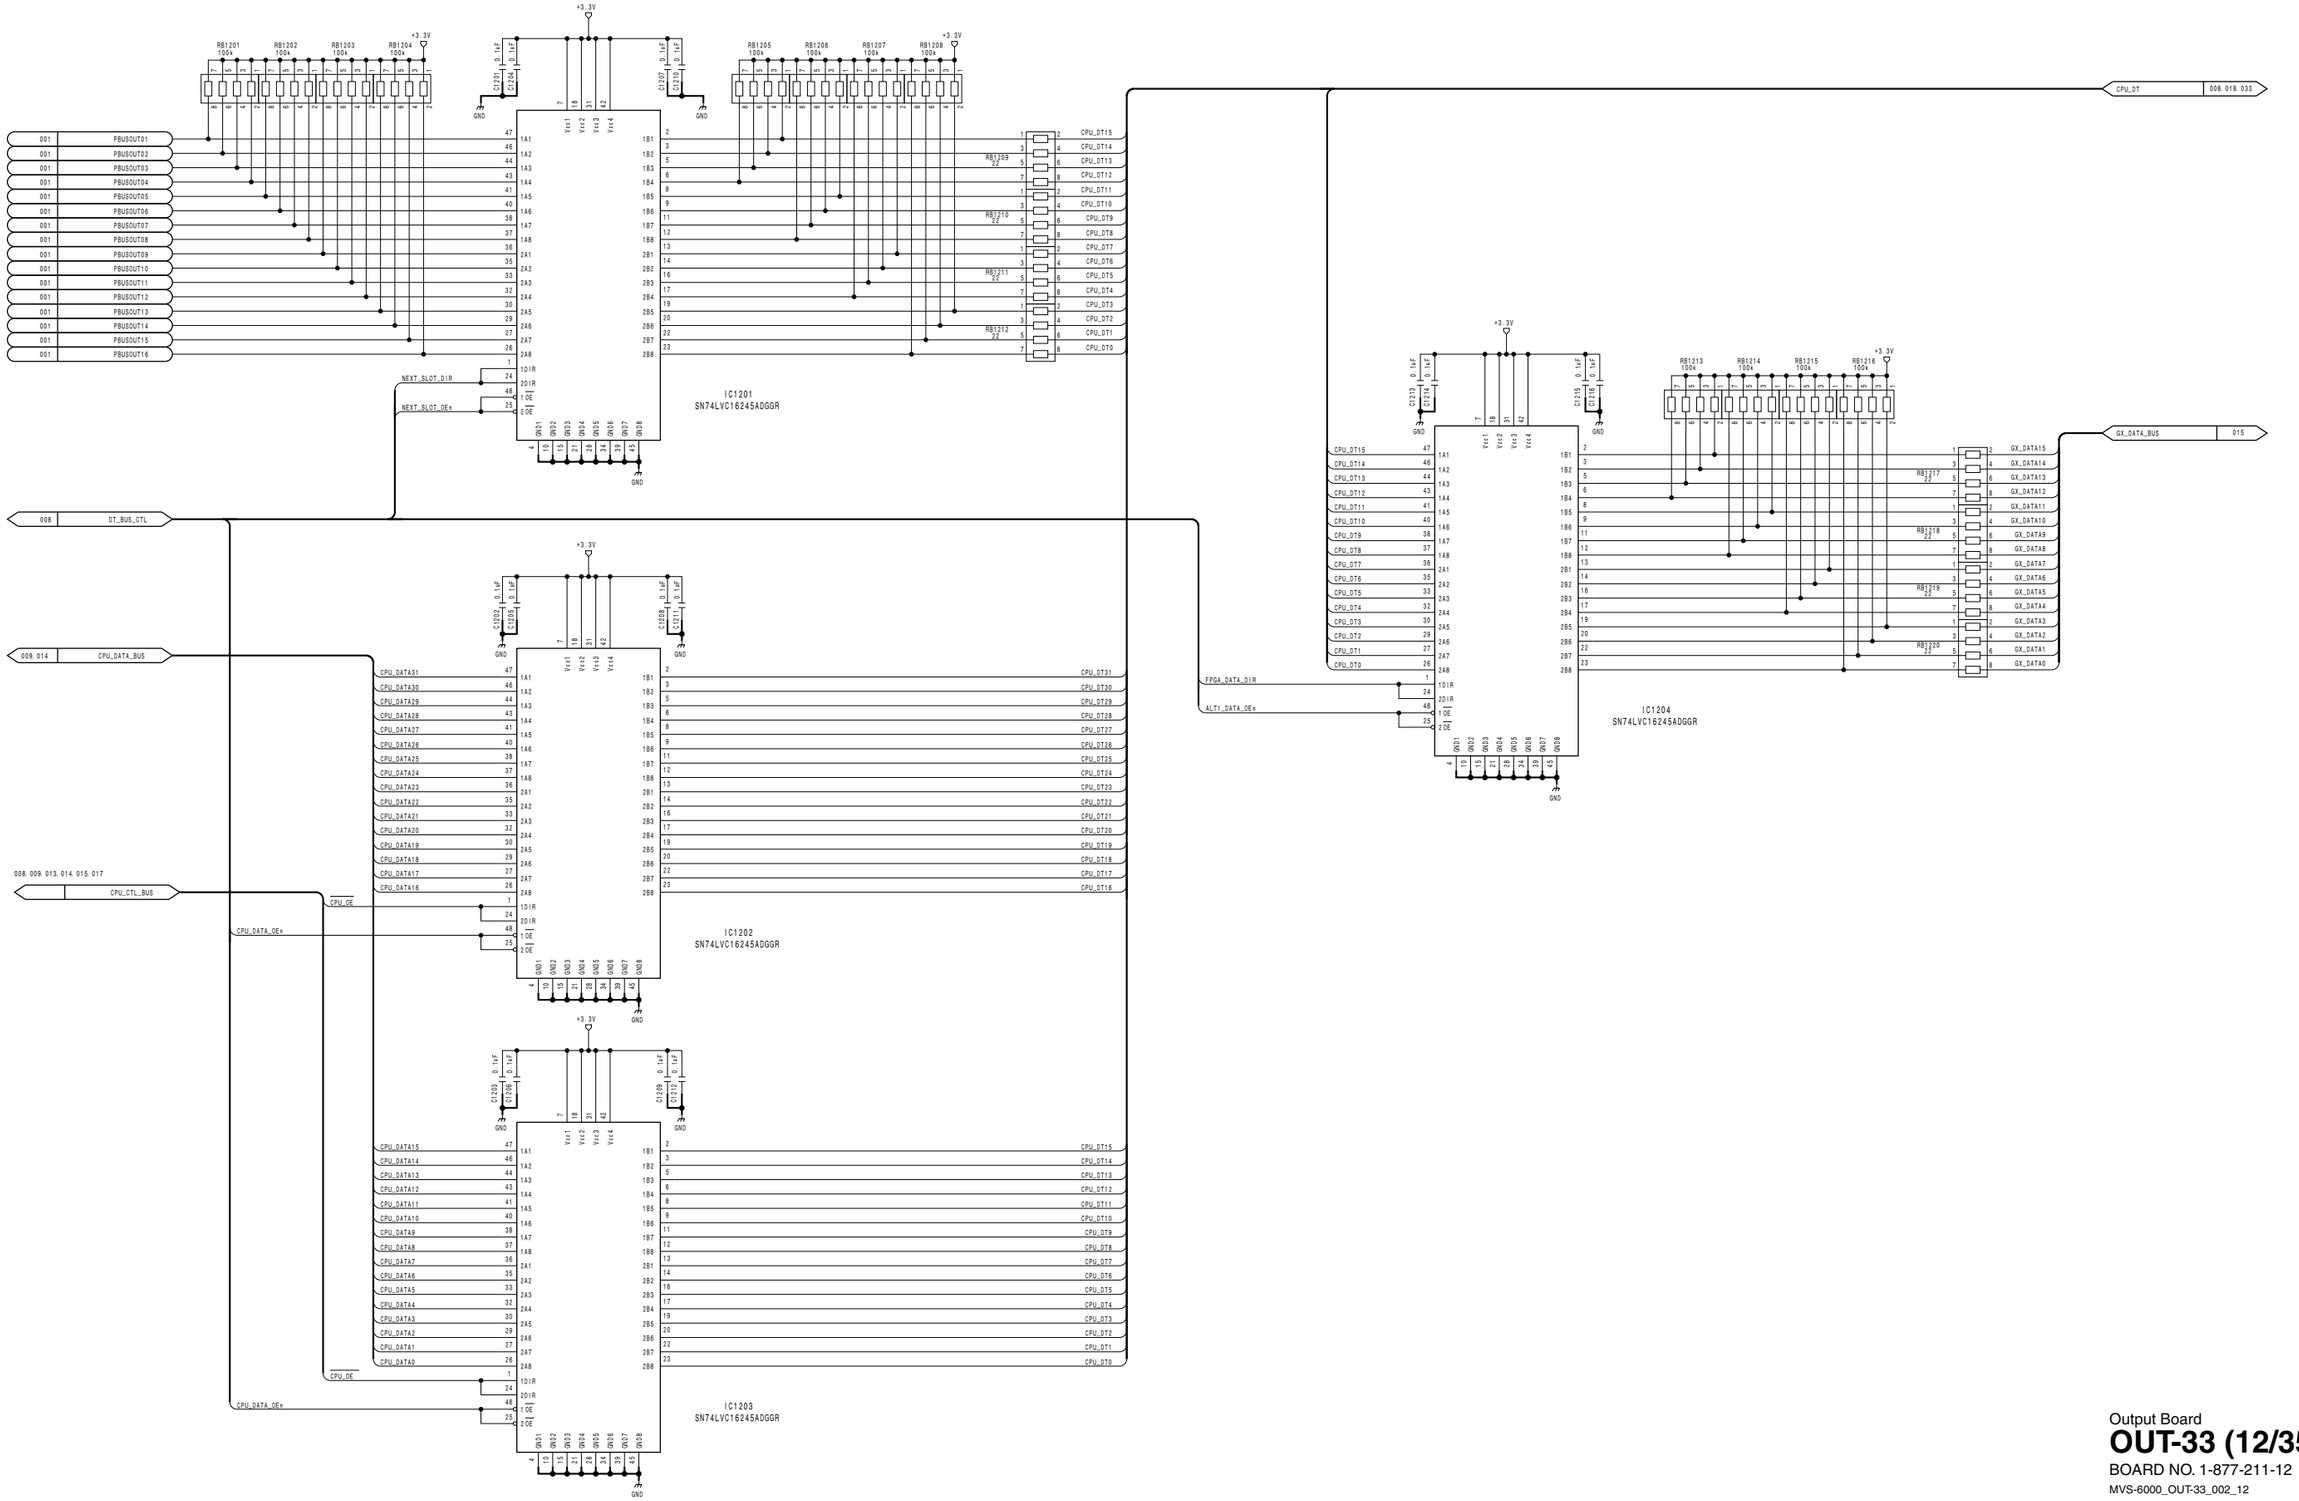


Output Board
OUT-33 (12/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_12

OUT-33 (13/35)
SUFFIX: -12

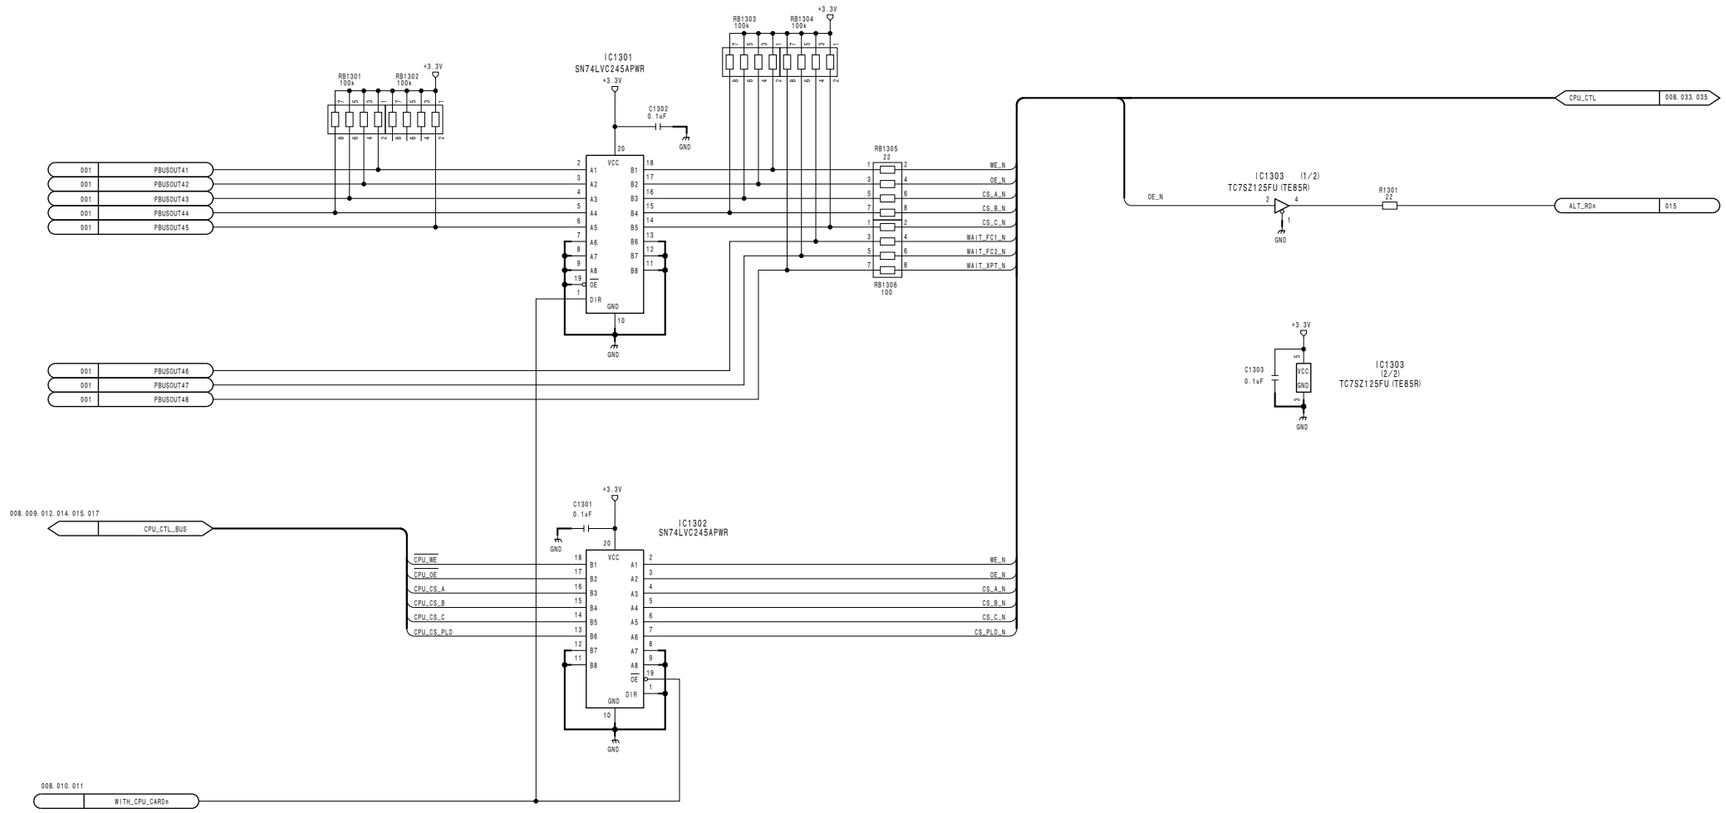


Output Board
OUT-33 (13/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_13

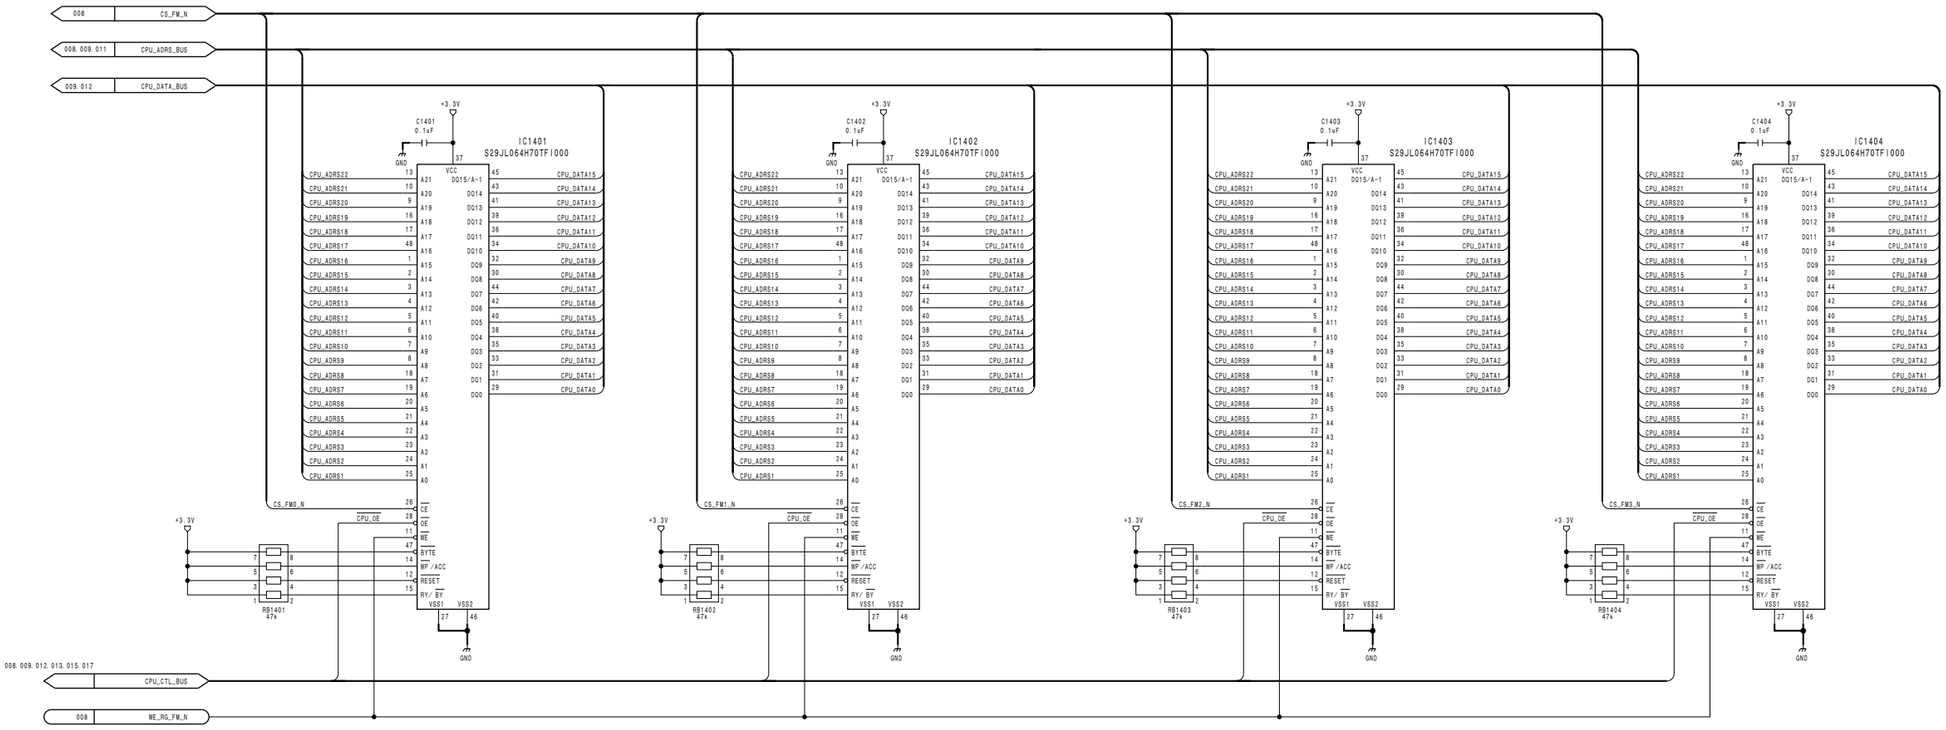


Output Board
OUT-33 (14/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_14


OUT-33 (15/35)
SUFFIX: -12

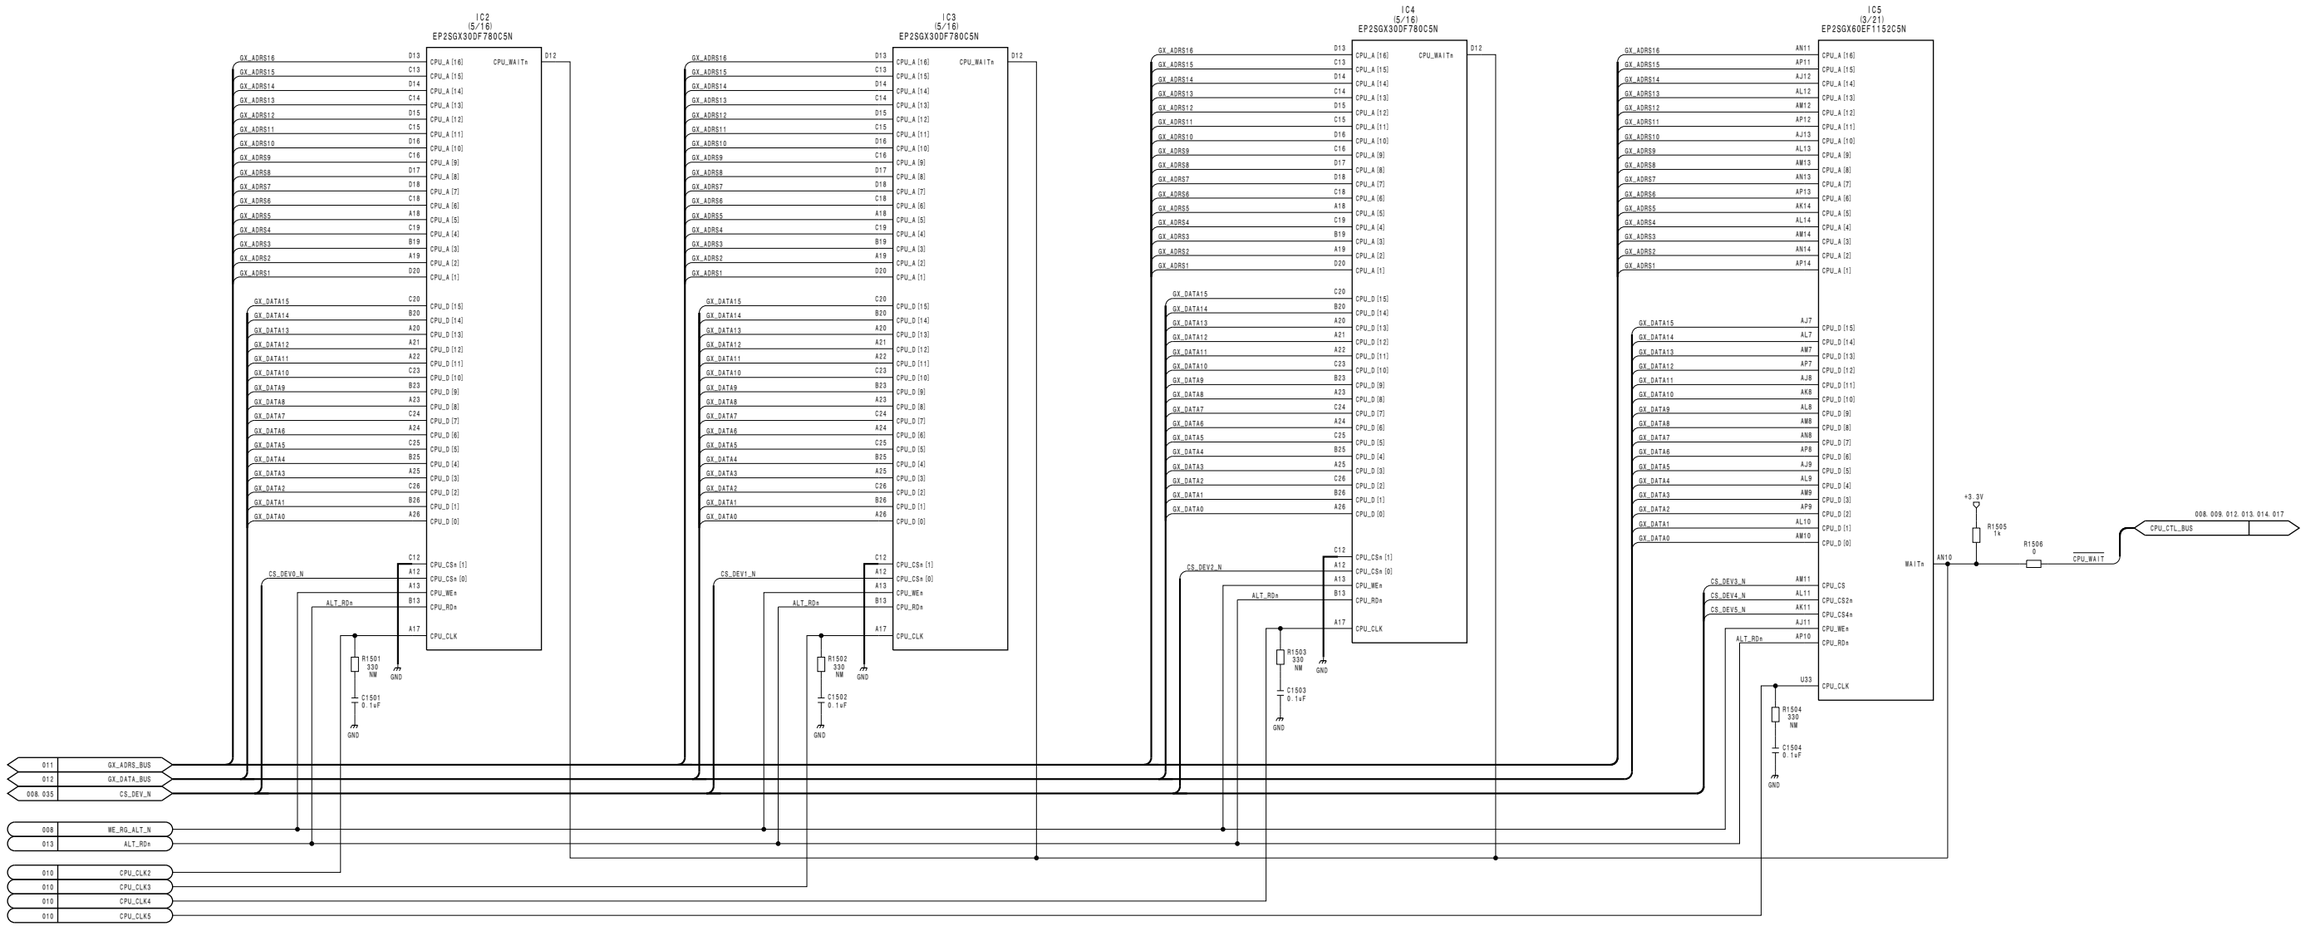



Output Board
OUT-33 (15/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_15


OUT-33 (16/35)
SUFFIX: -12

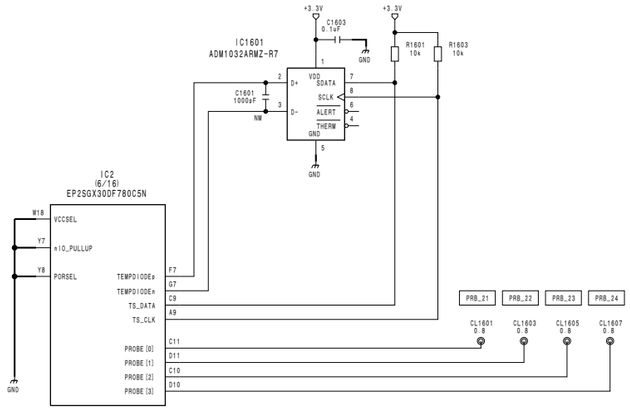


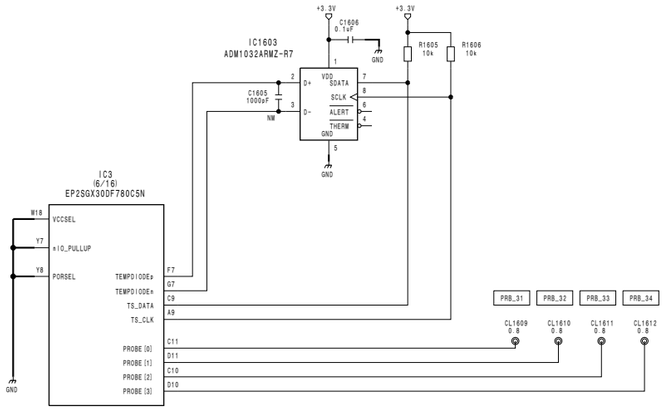


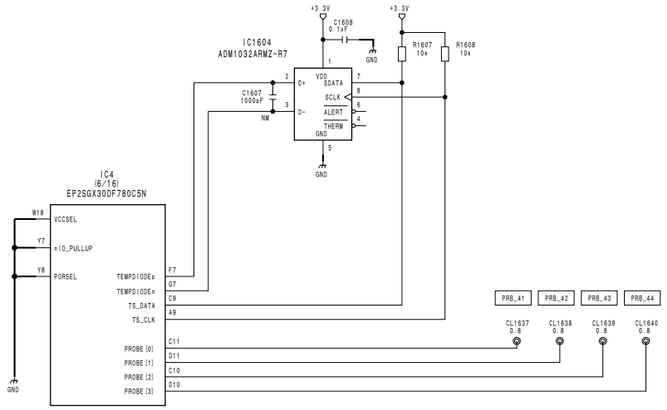

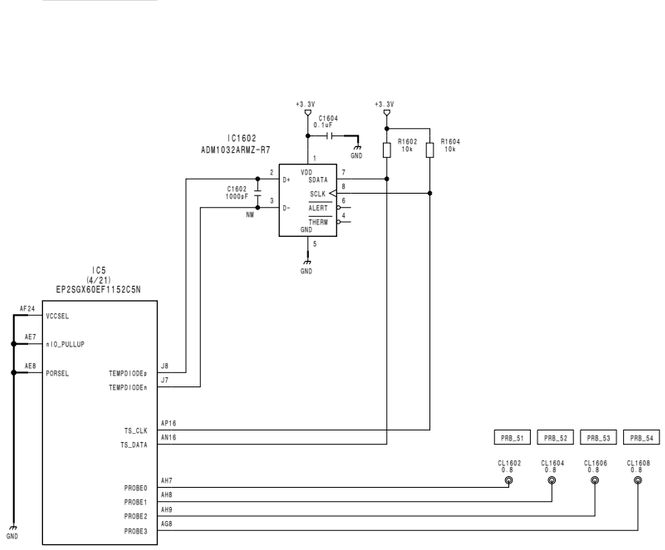









Output Board
OUT-33 (16/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_16

OUT-33 (17/35)
SUFFIX: -12

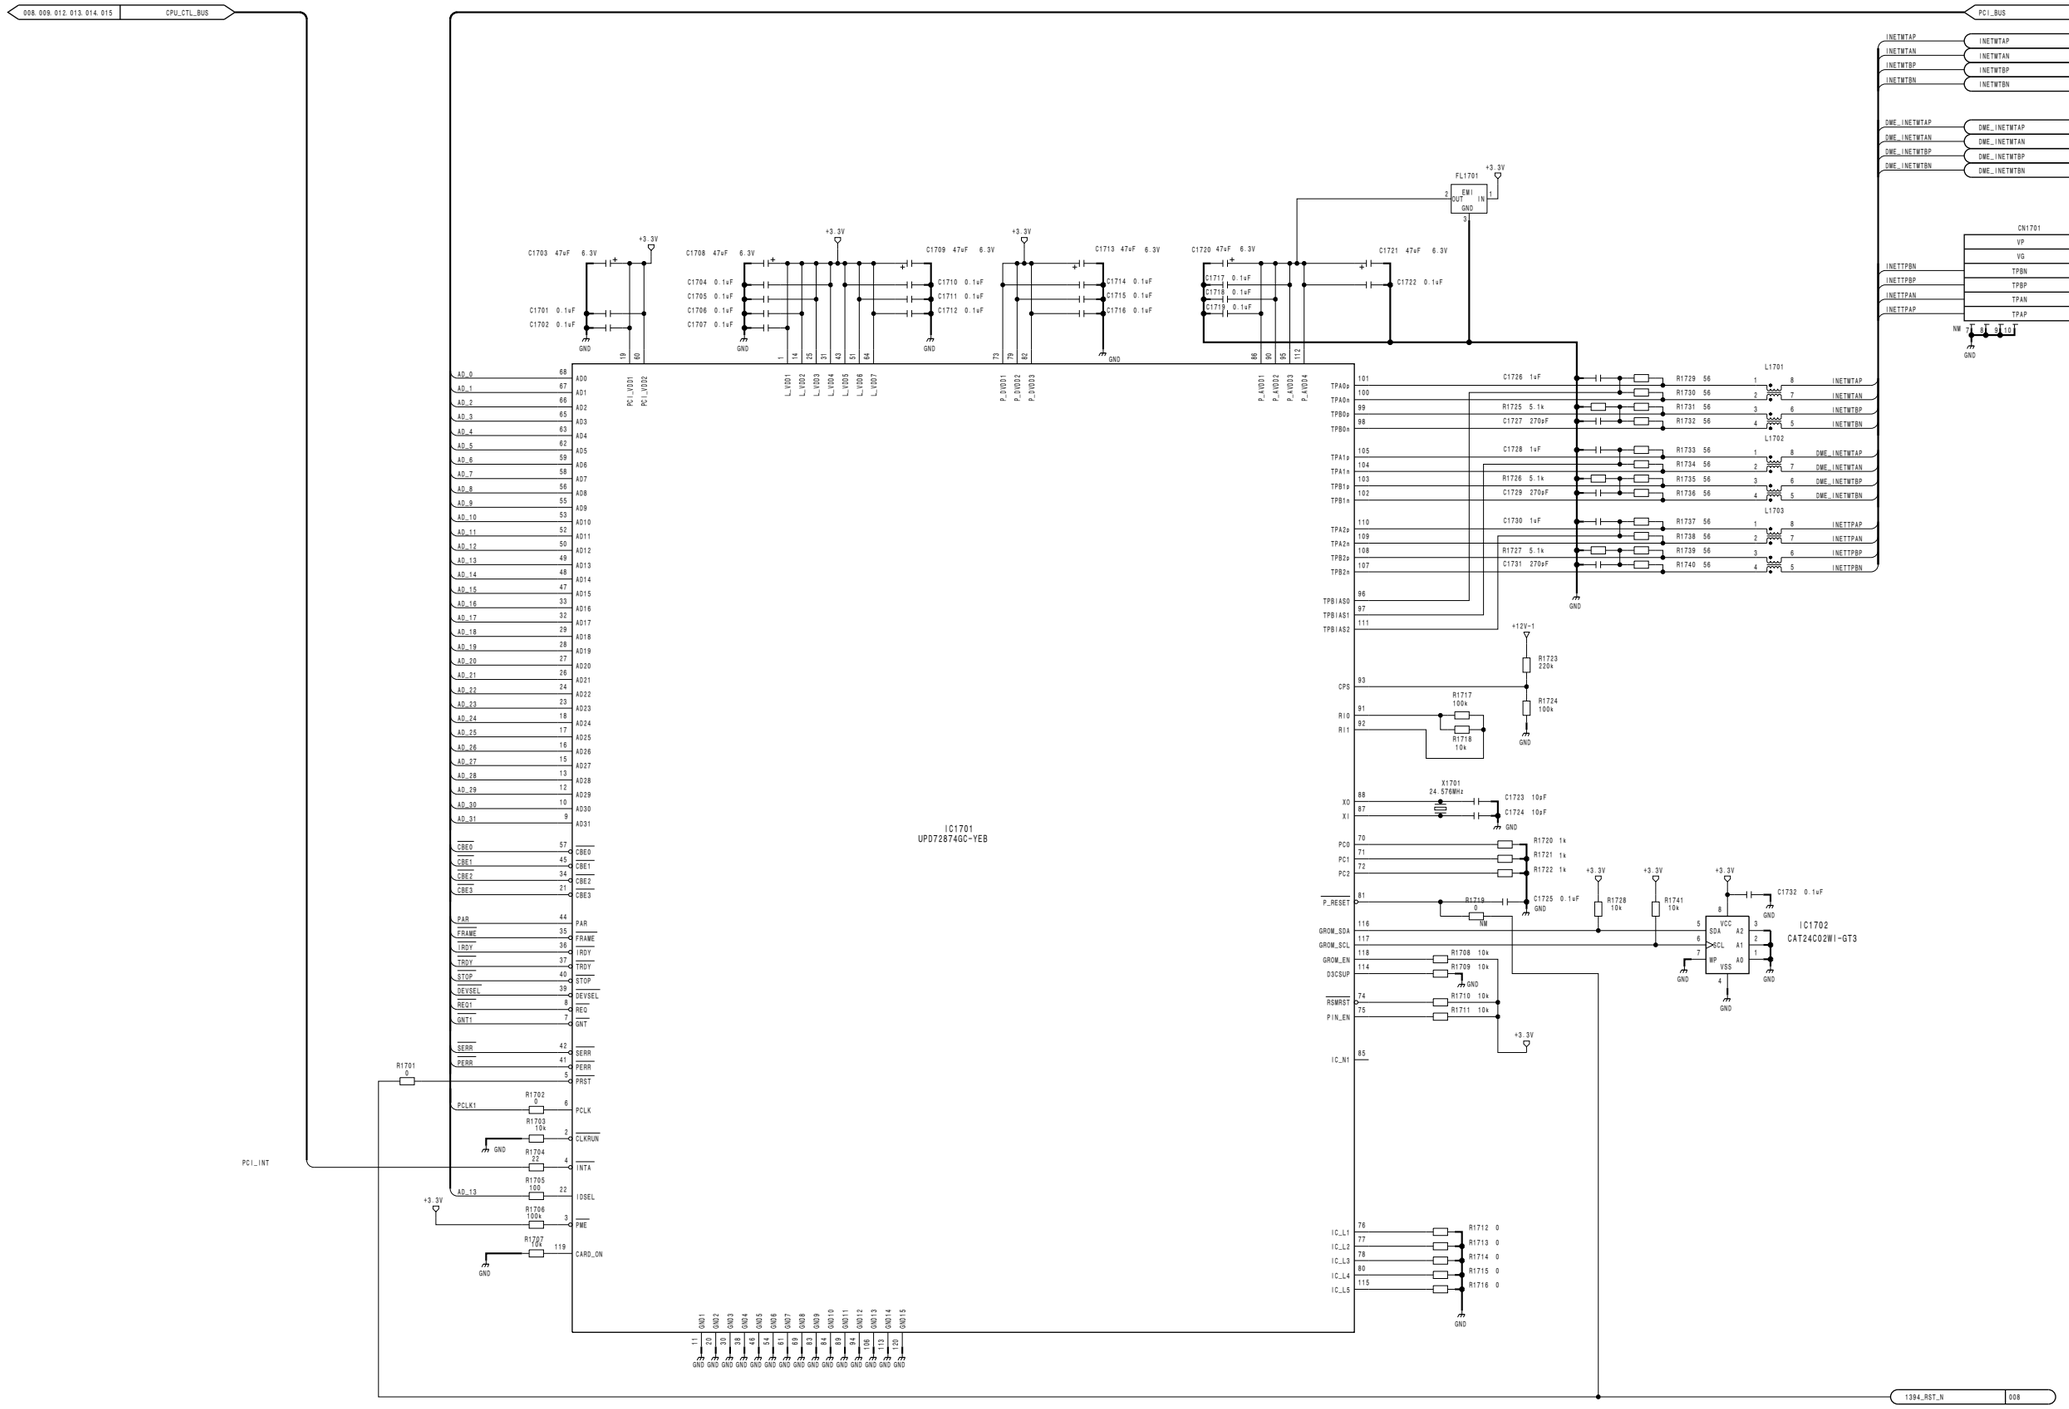

Output Board
OUT-33 (17/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_17


OUT-33 (18/35)
SUFFIX: -12

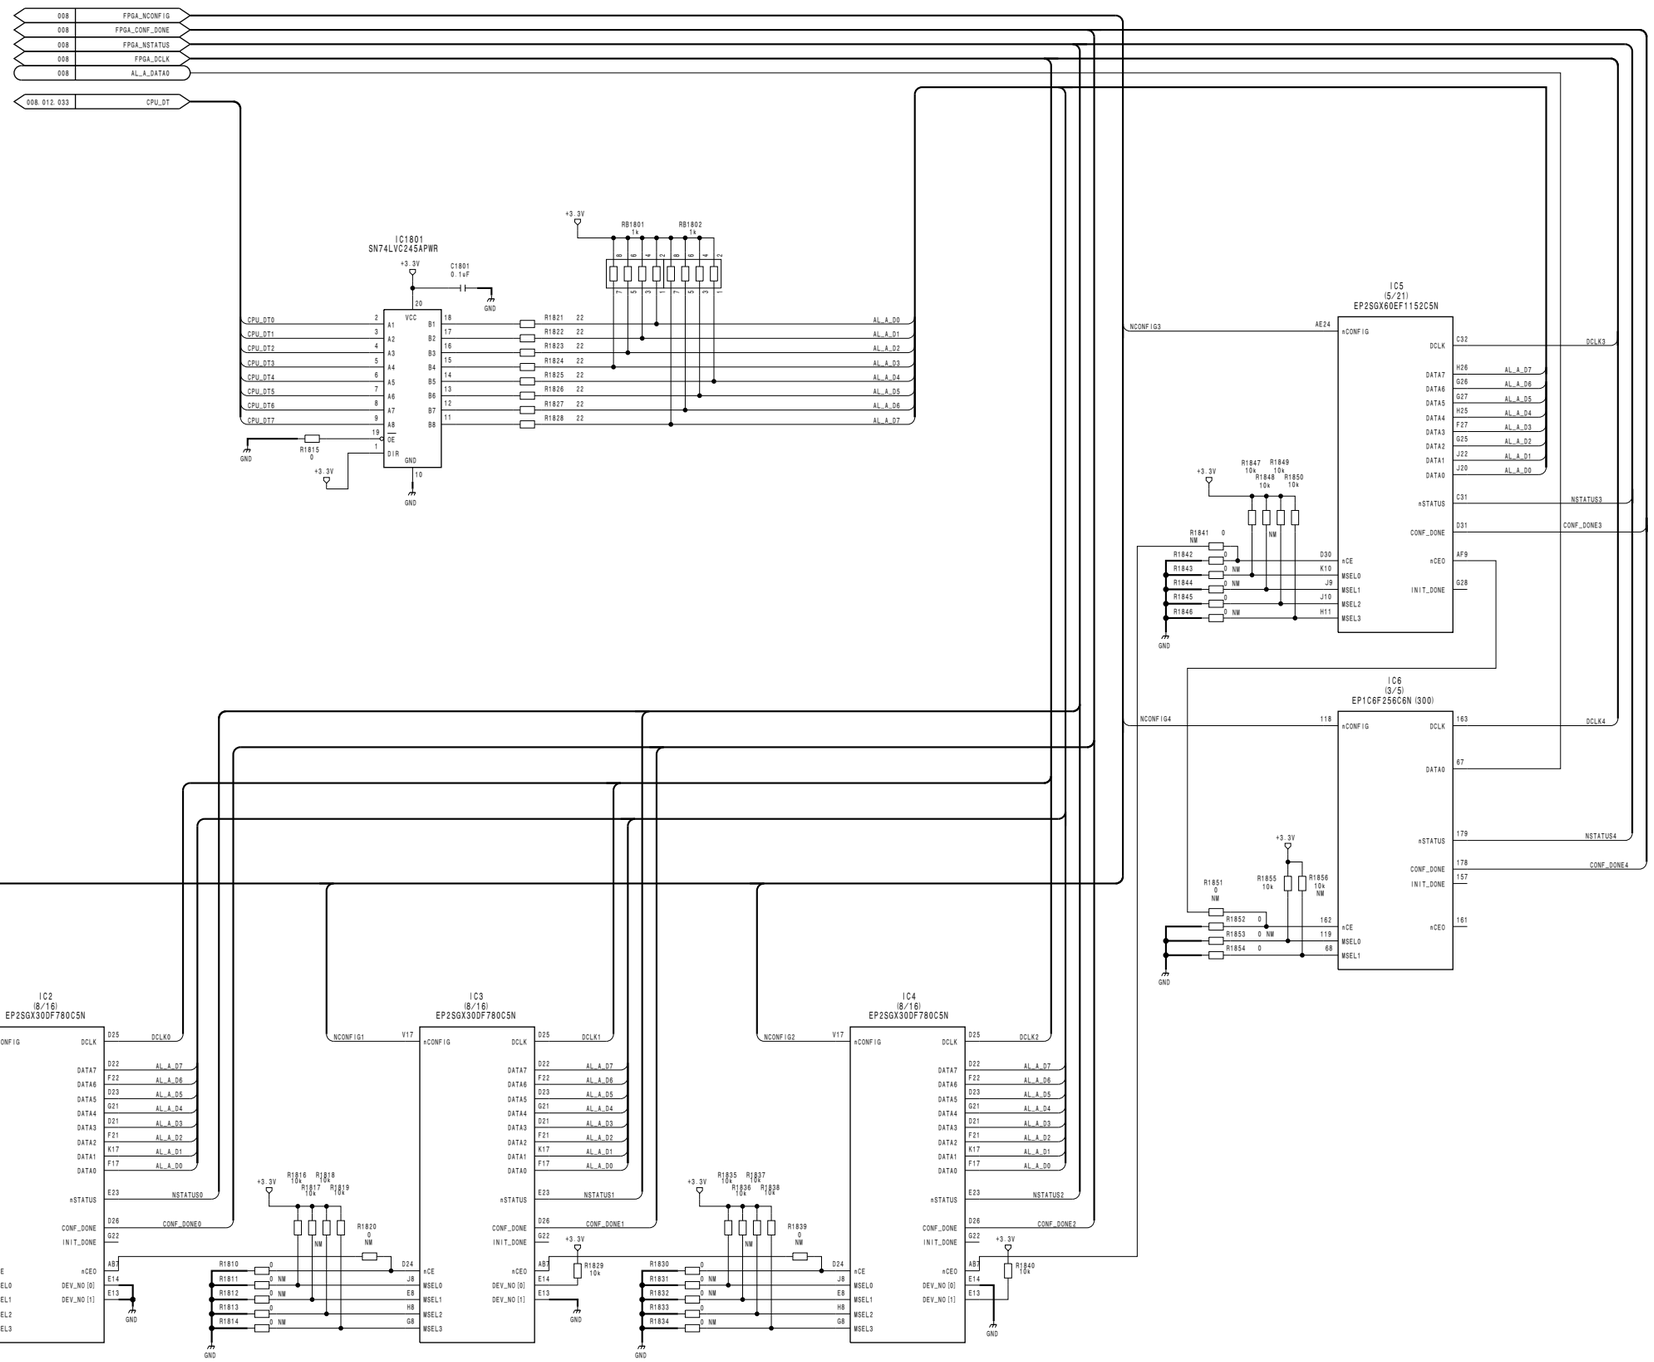


Output Board
OUT-33 (18/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_18

OUT-33 (19/35)
SUFFIX: -12

JTAG_CHAIN \ Ref	R1929	R1927	R1937
CADEC (IC1)	M*t	N.M*	N.M*
FULL	N.M*	M*t	M*t

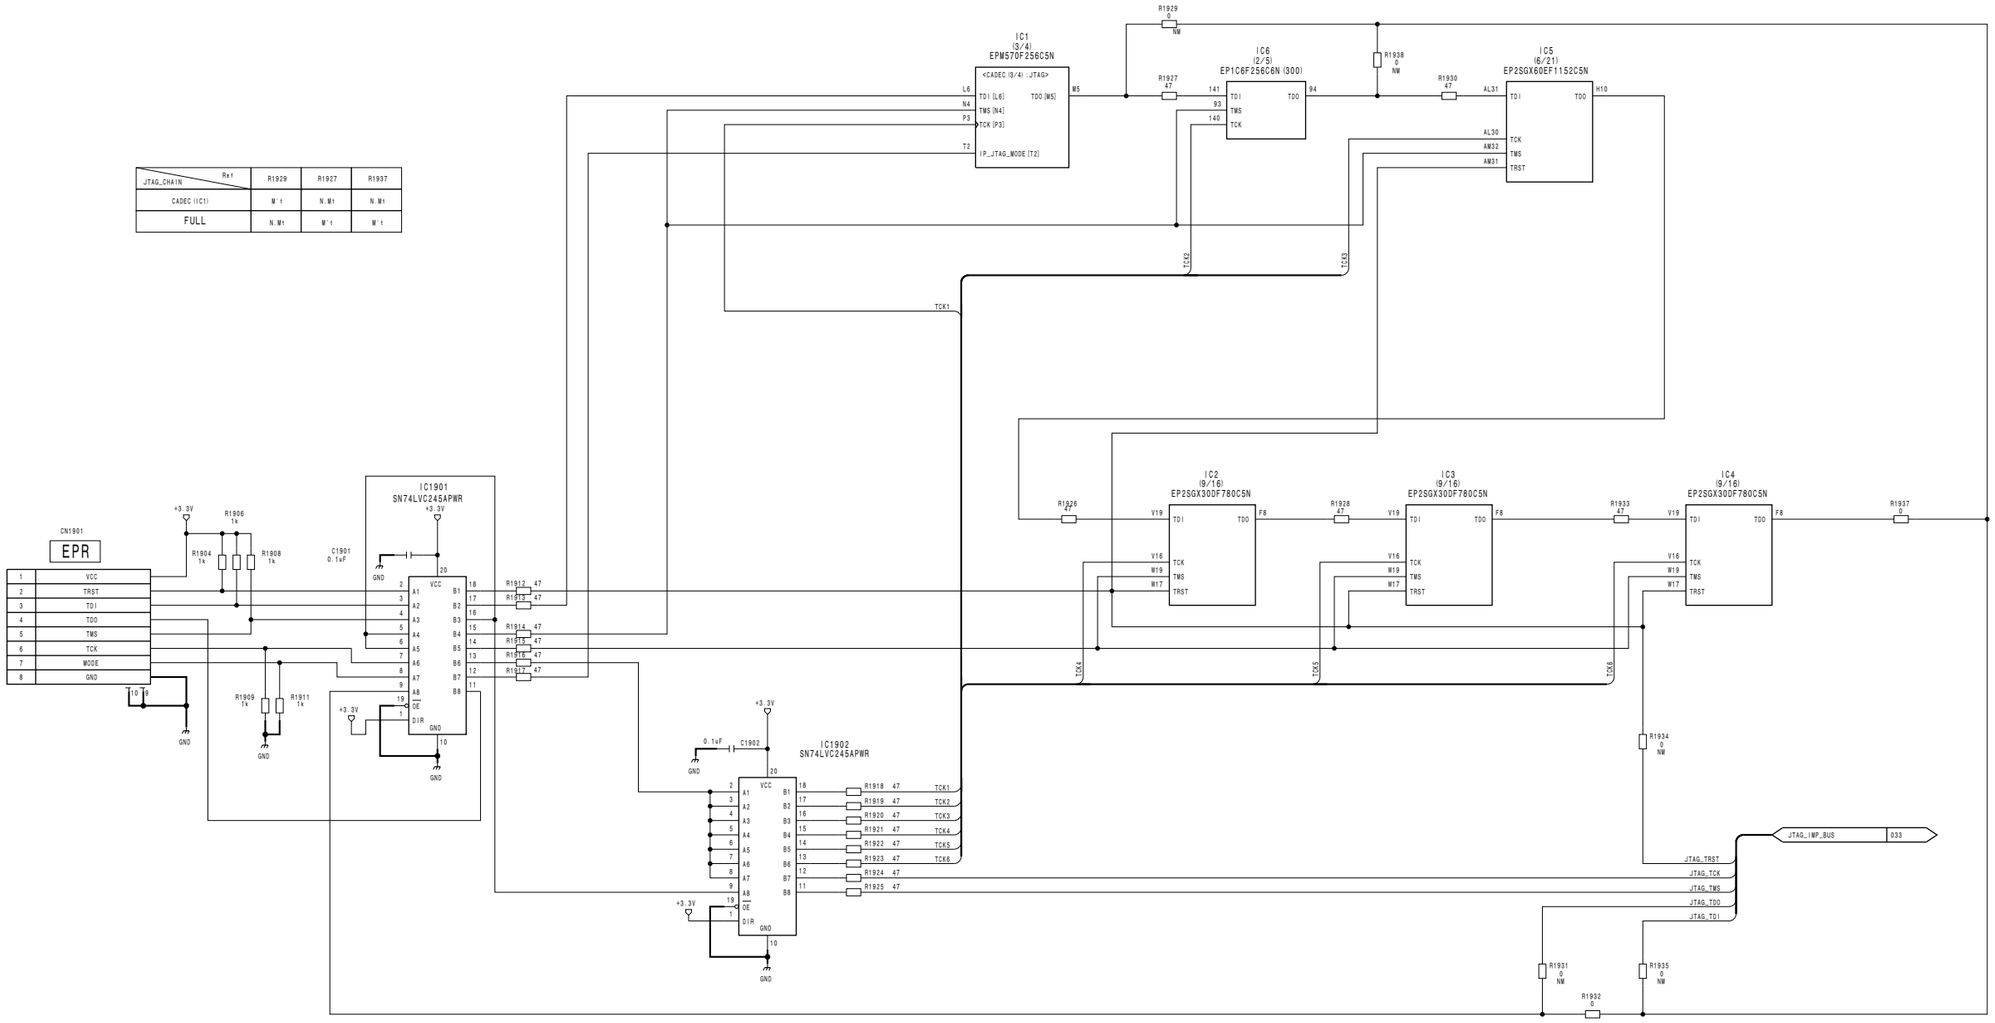



Output Board
OUT-33 (19/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_19

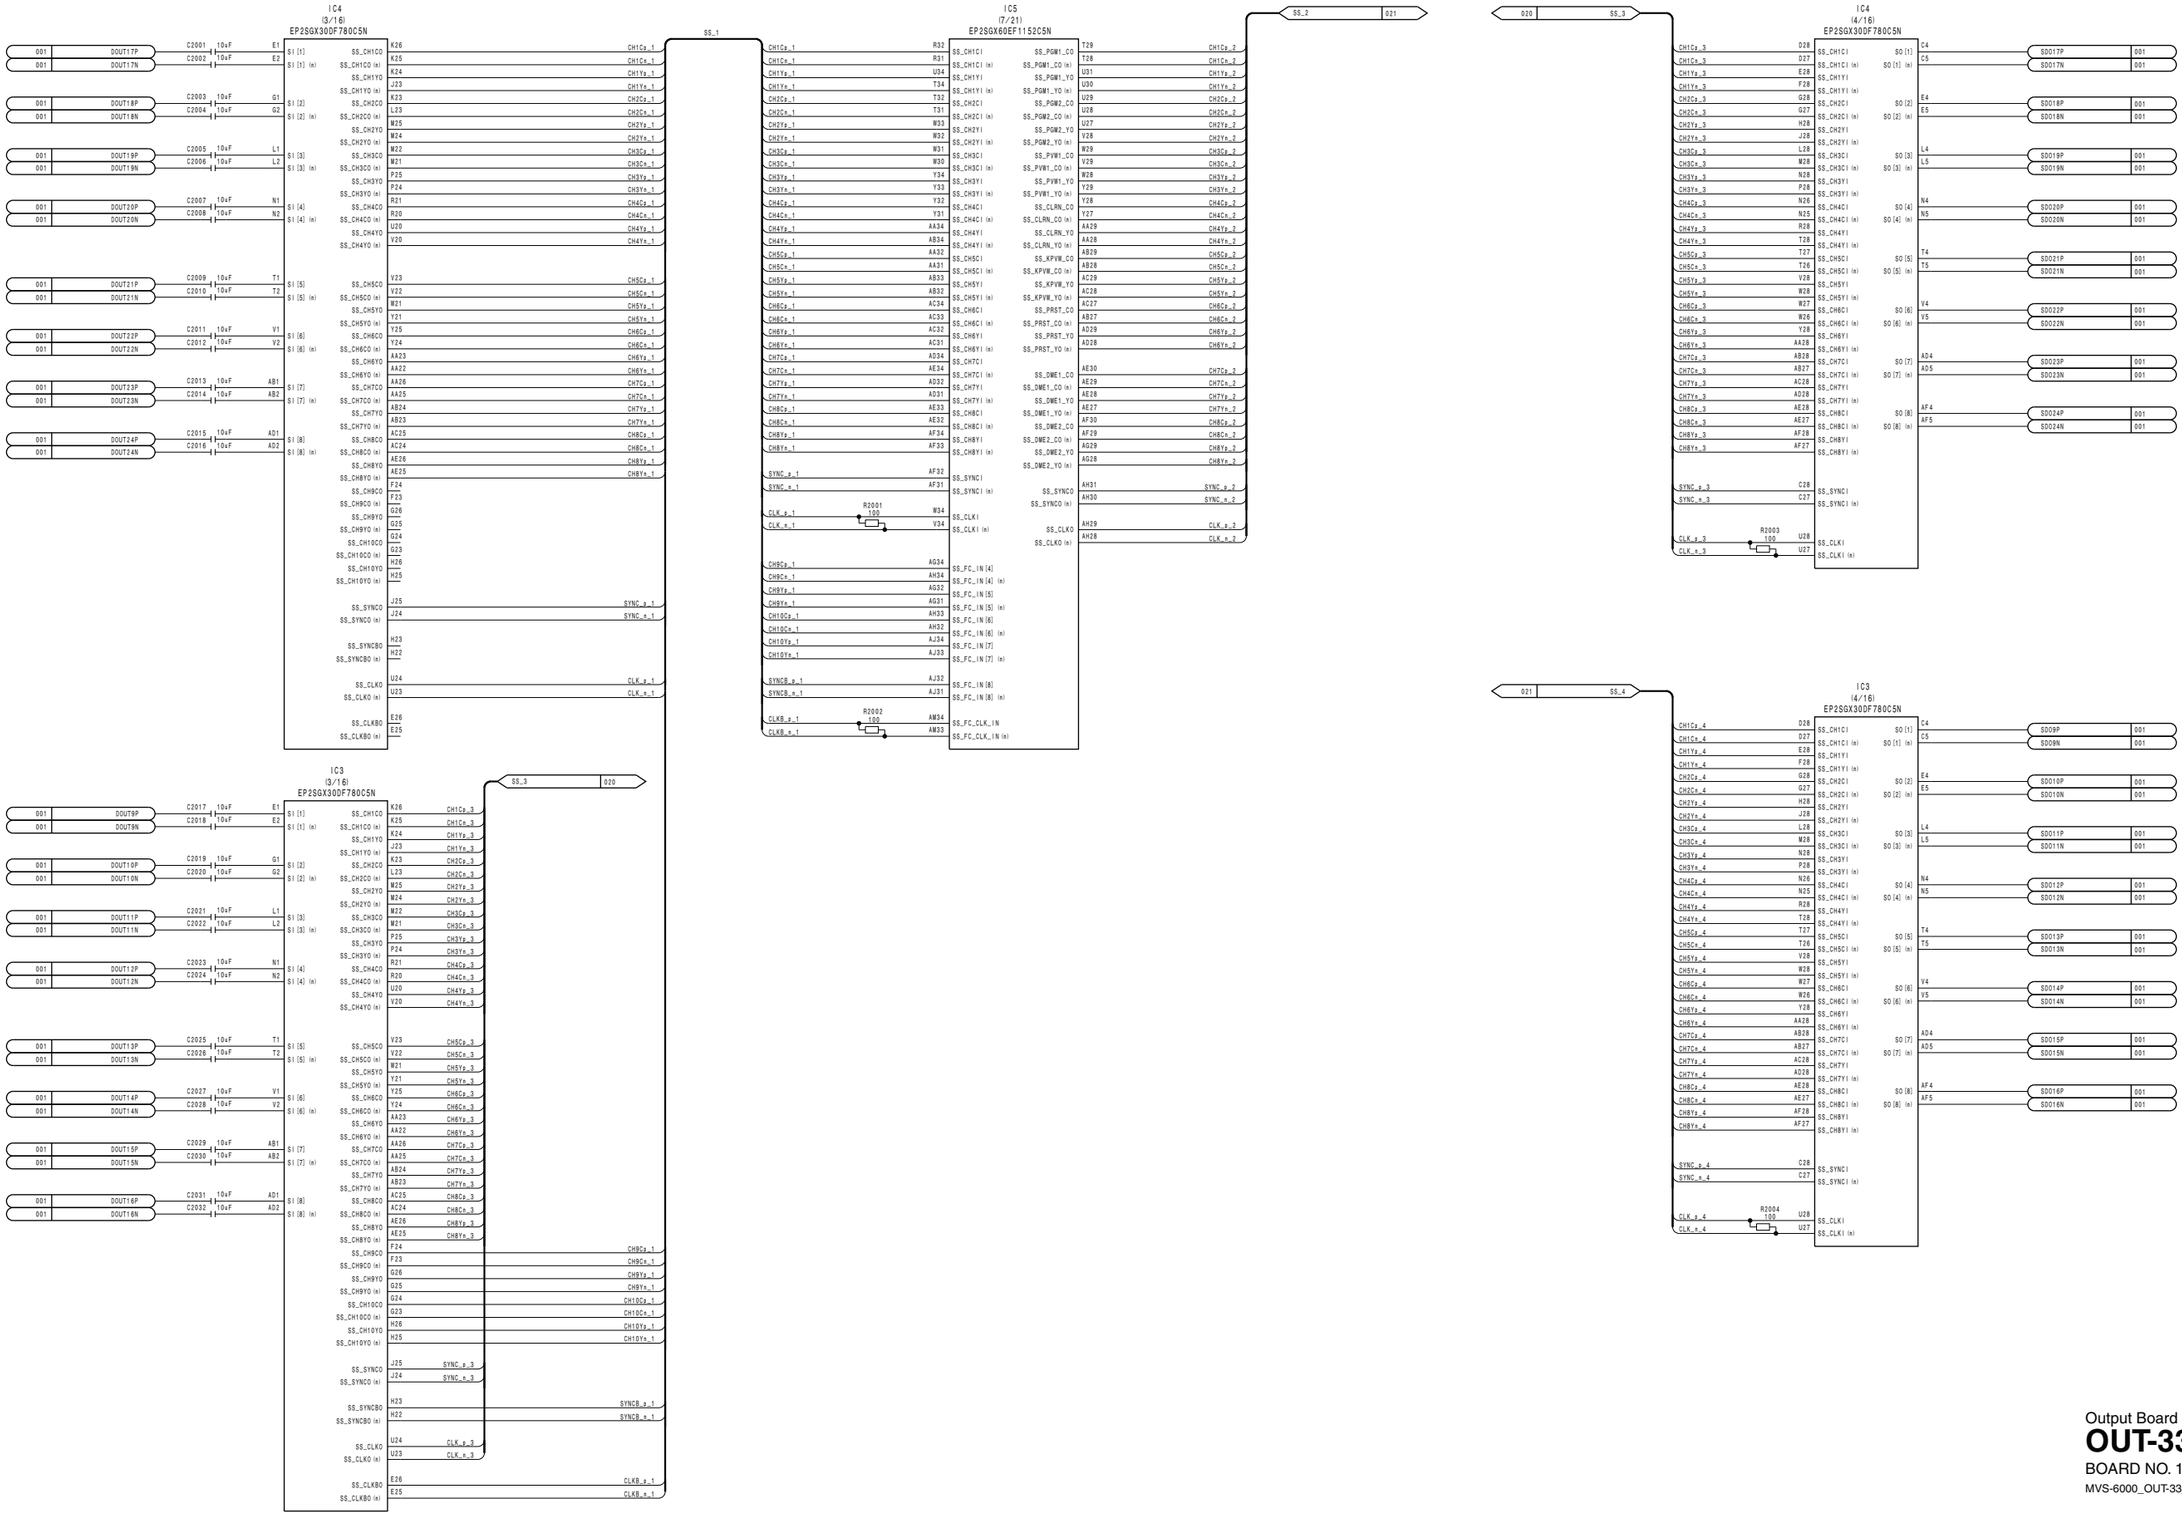


Output Board
OUT-33 (20/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_20


OUT-33 (21/35)
SUFFIX: -12

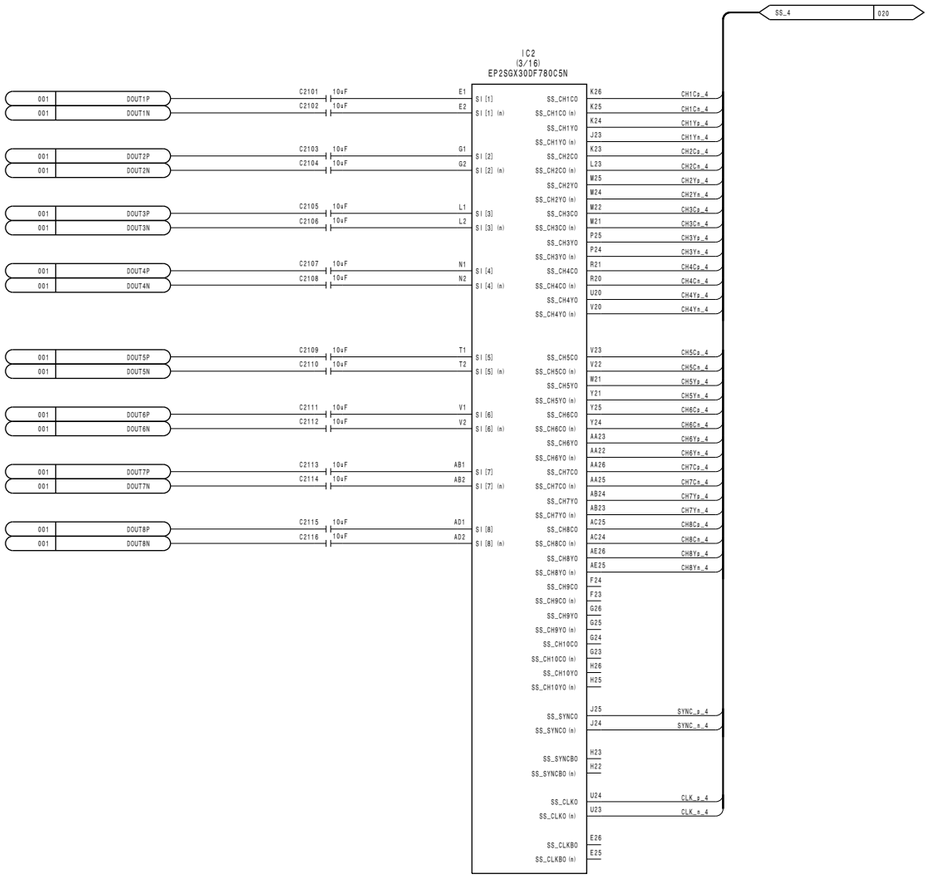

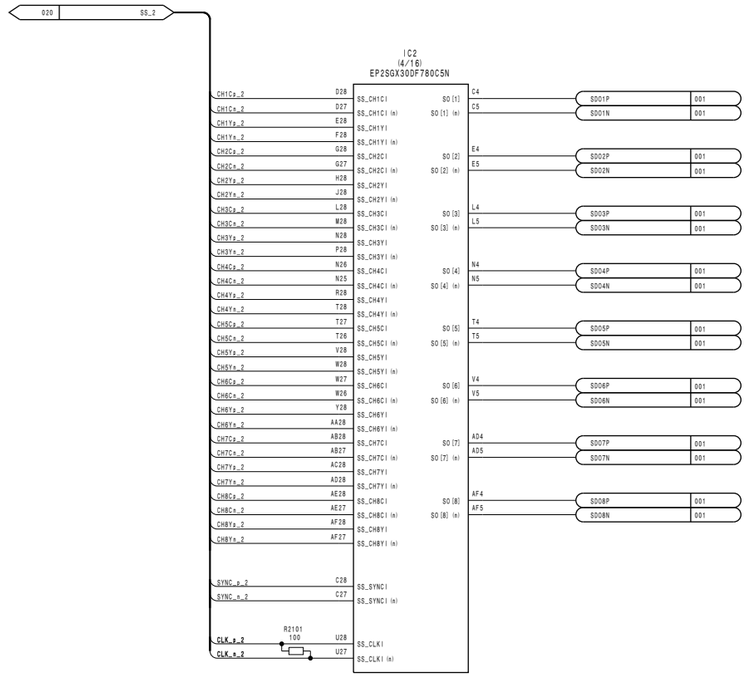

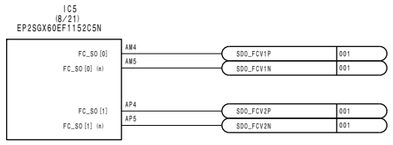


Output Board
OUT-33 (21/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_21

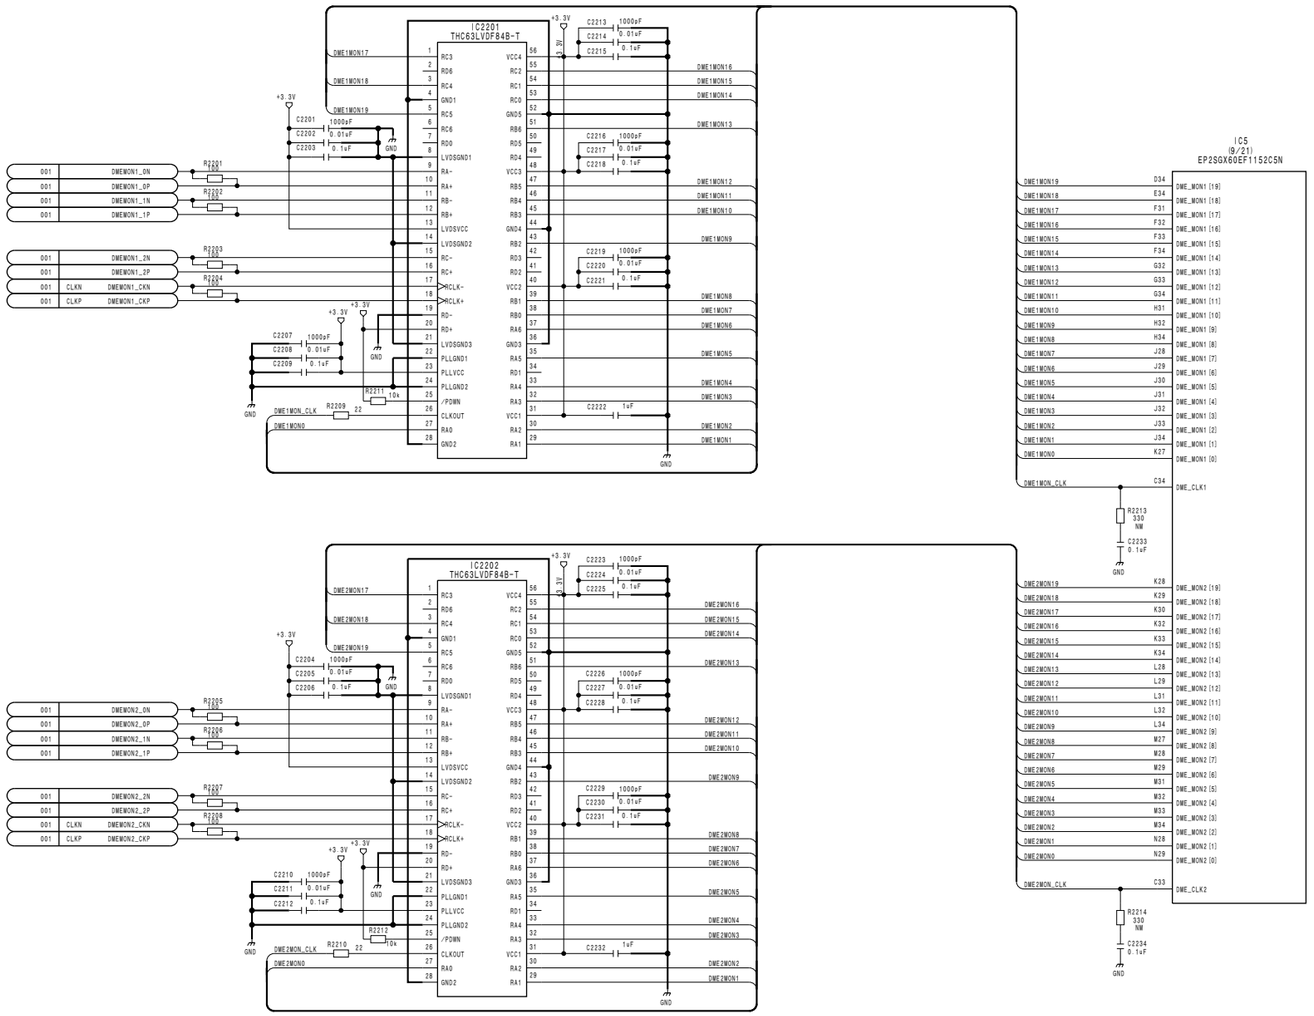

Output Board
OUT-33 (22/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_22


OUT-33 (23/35)
SUFFIX: -12

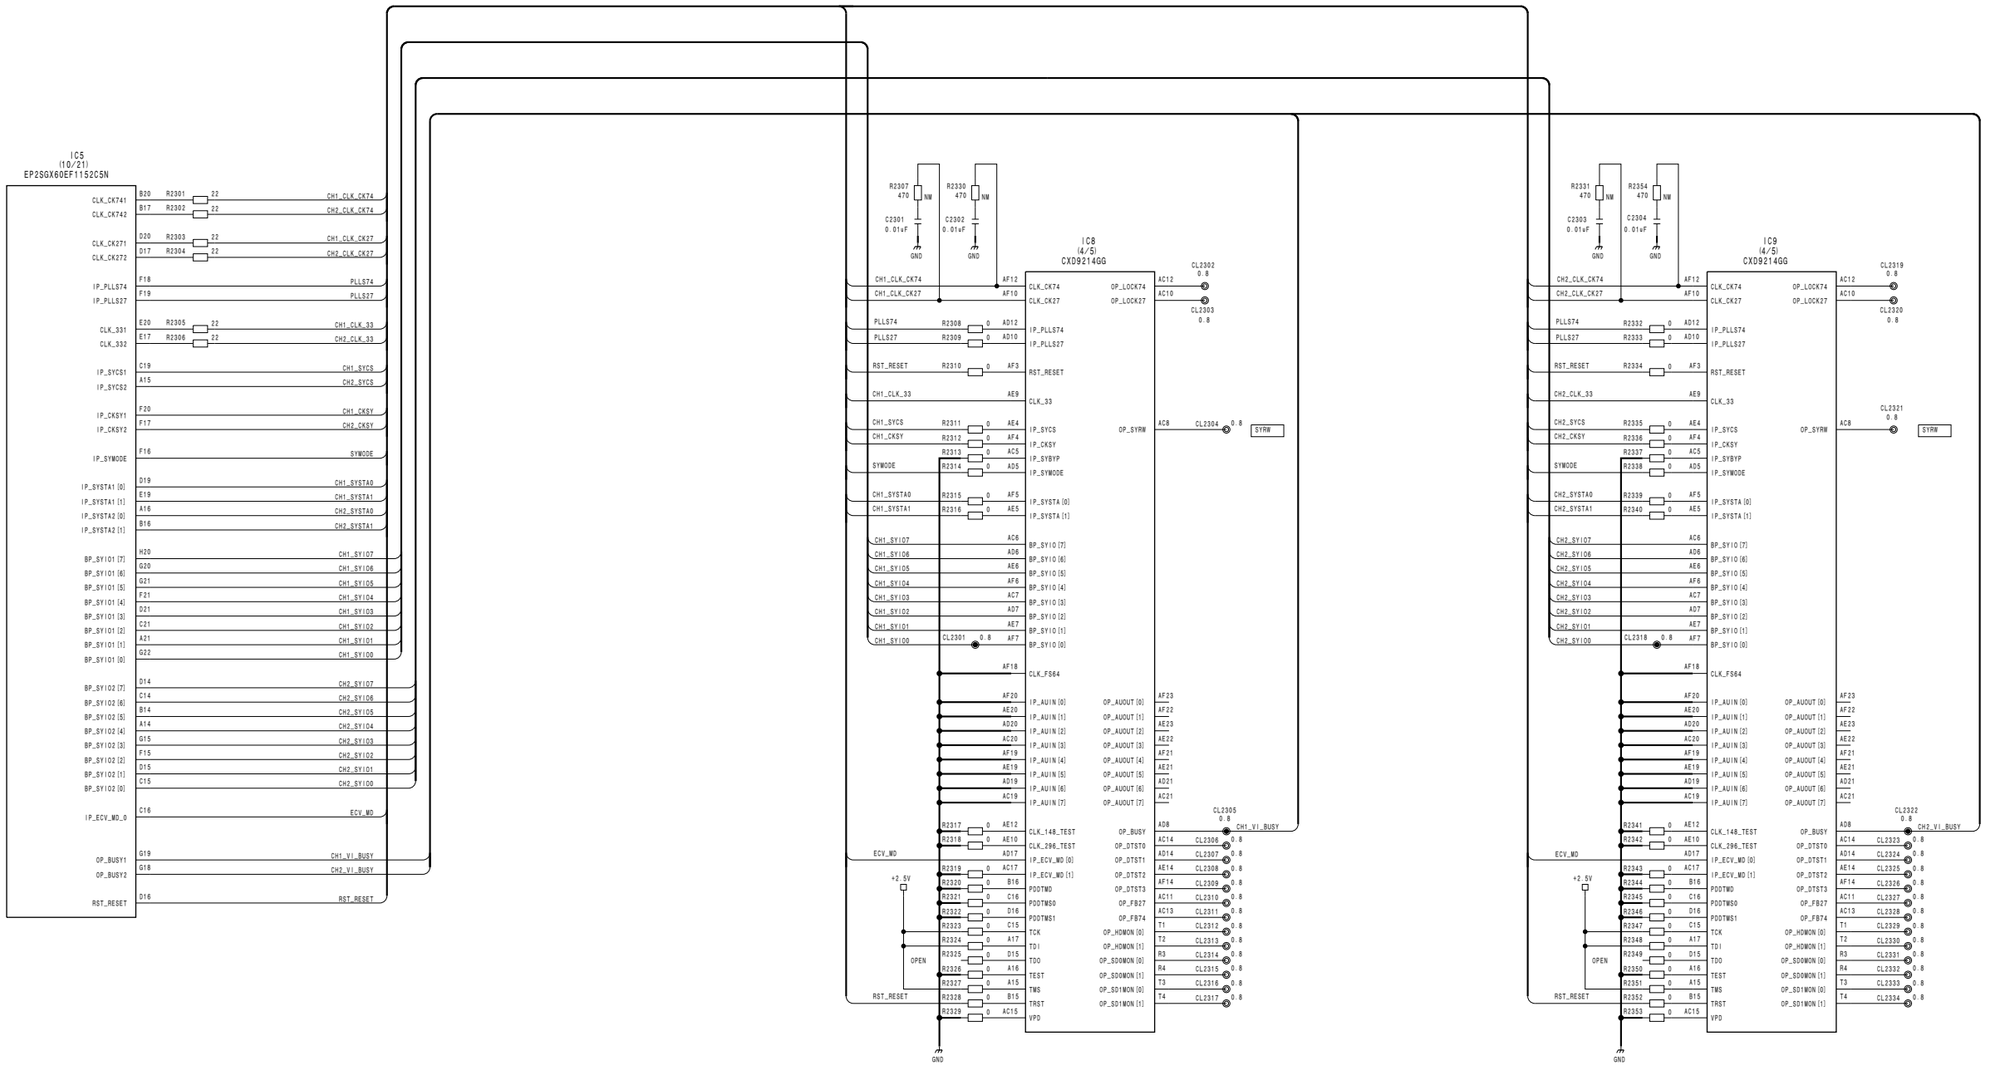


Output Board
OUT-33 (23/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_23

OUT-33 (24/35)
SUFFIX: -12


OUT-33 (24/35)
SUFFIX: -12

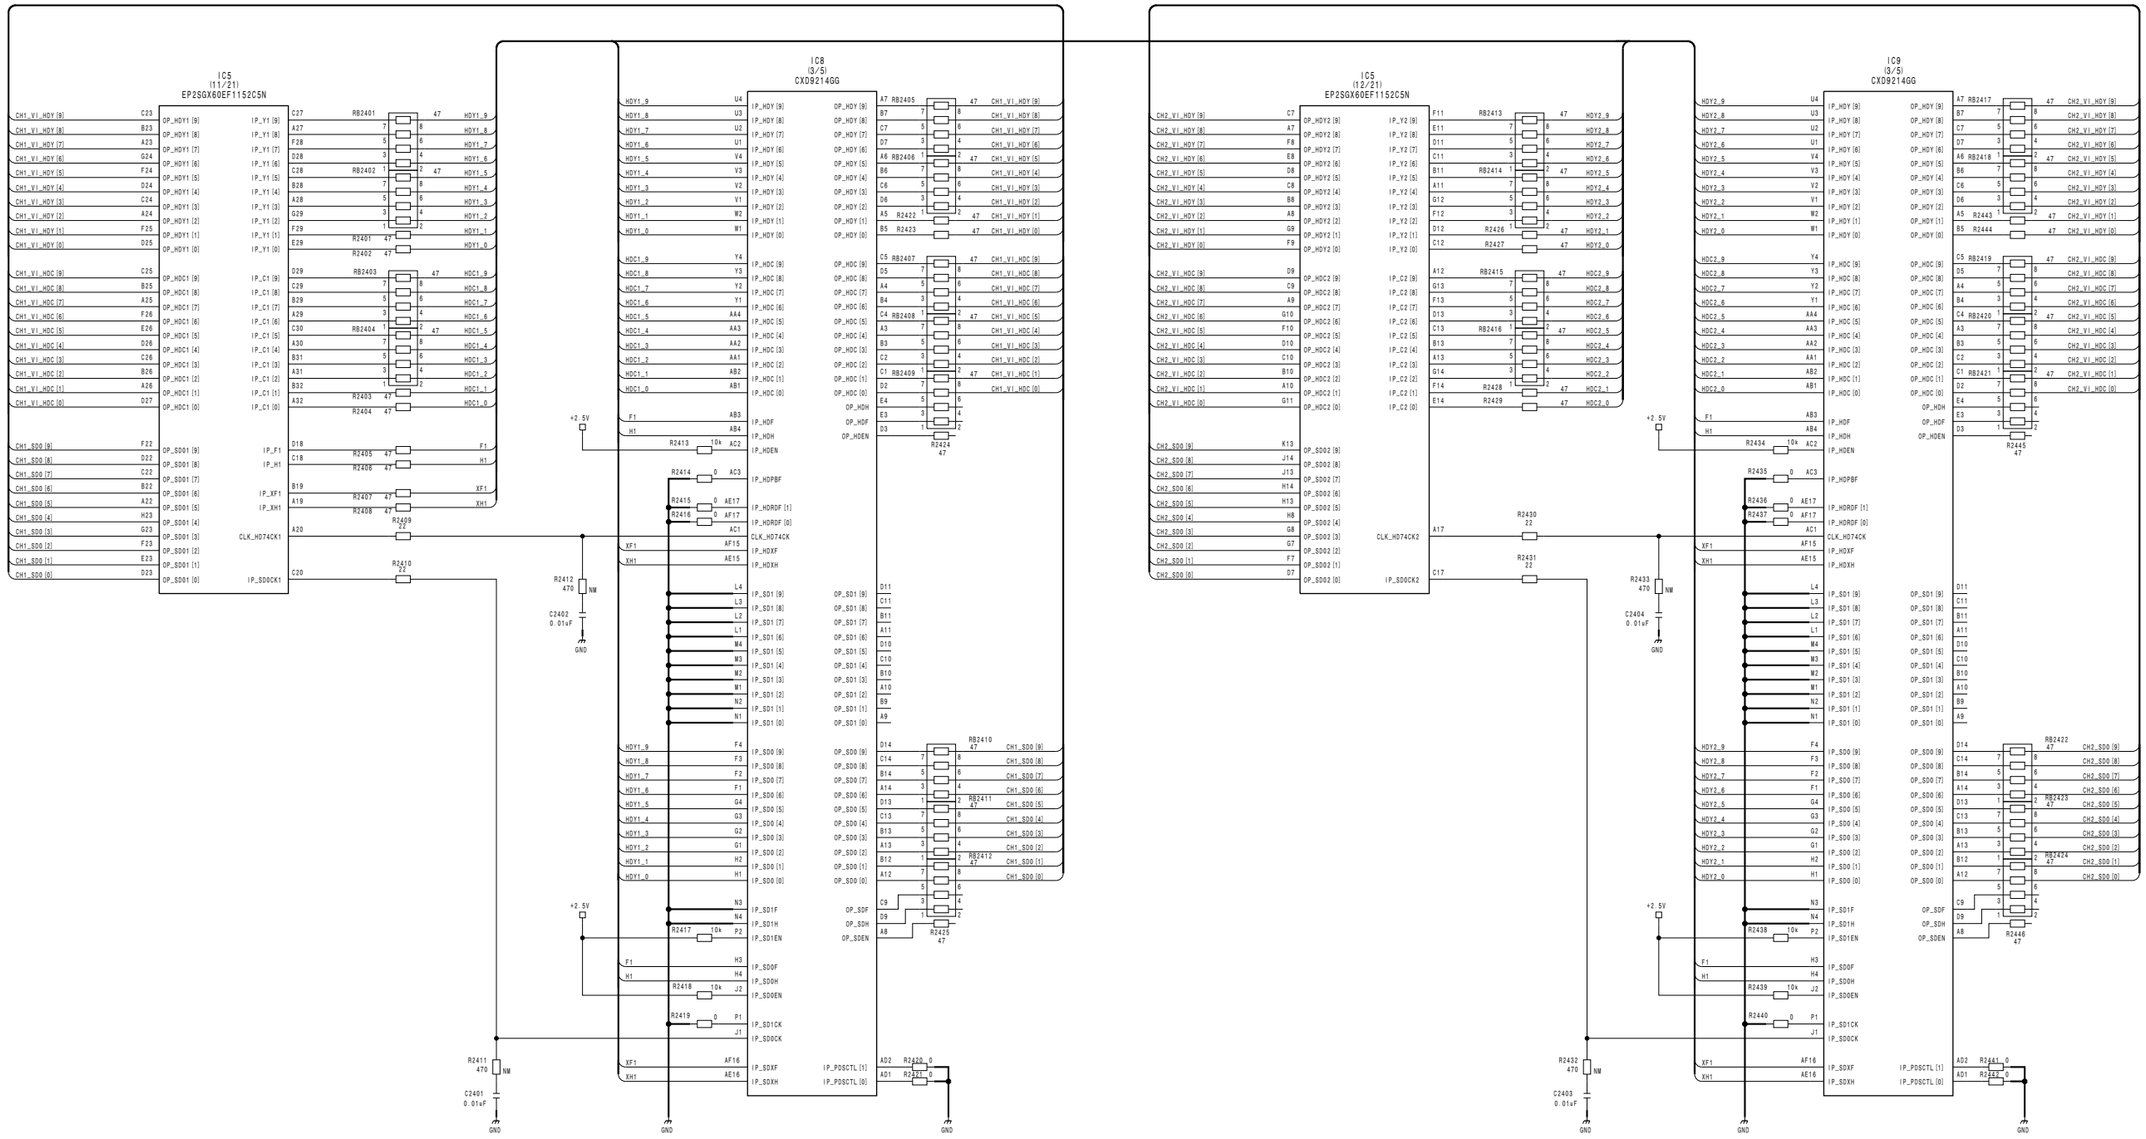


Output Board
OUT-33 (24/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_24

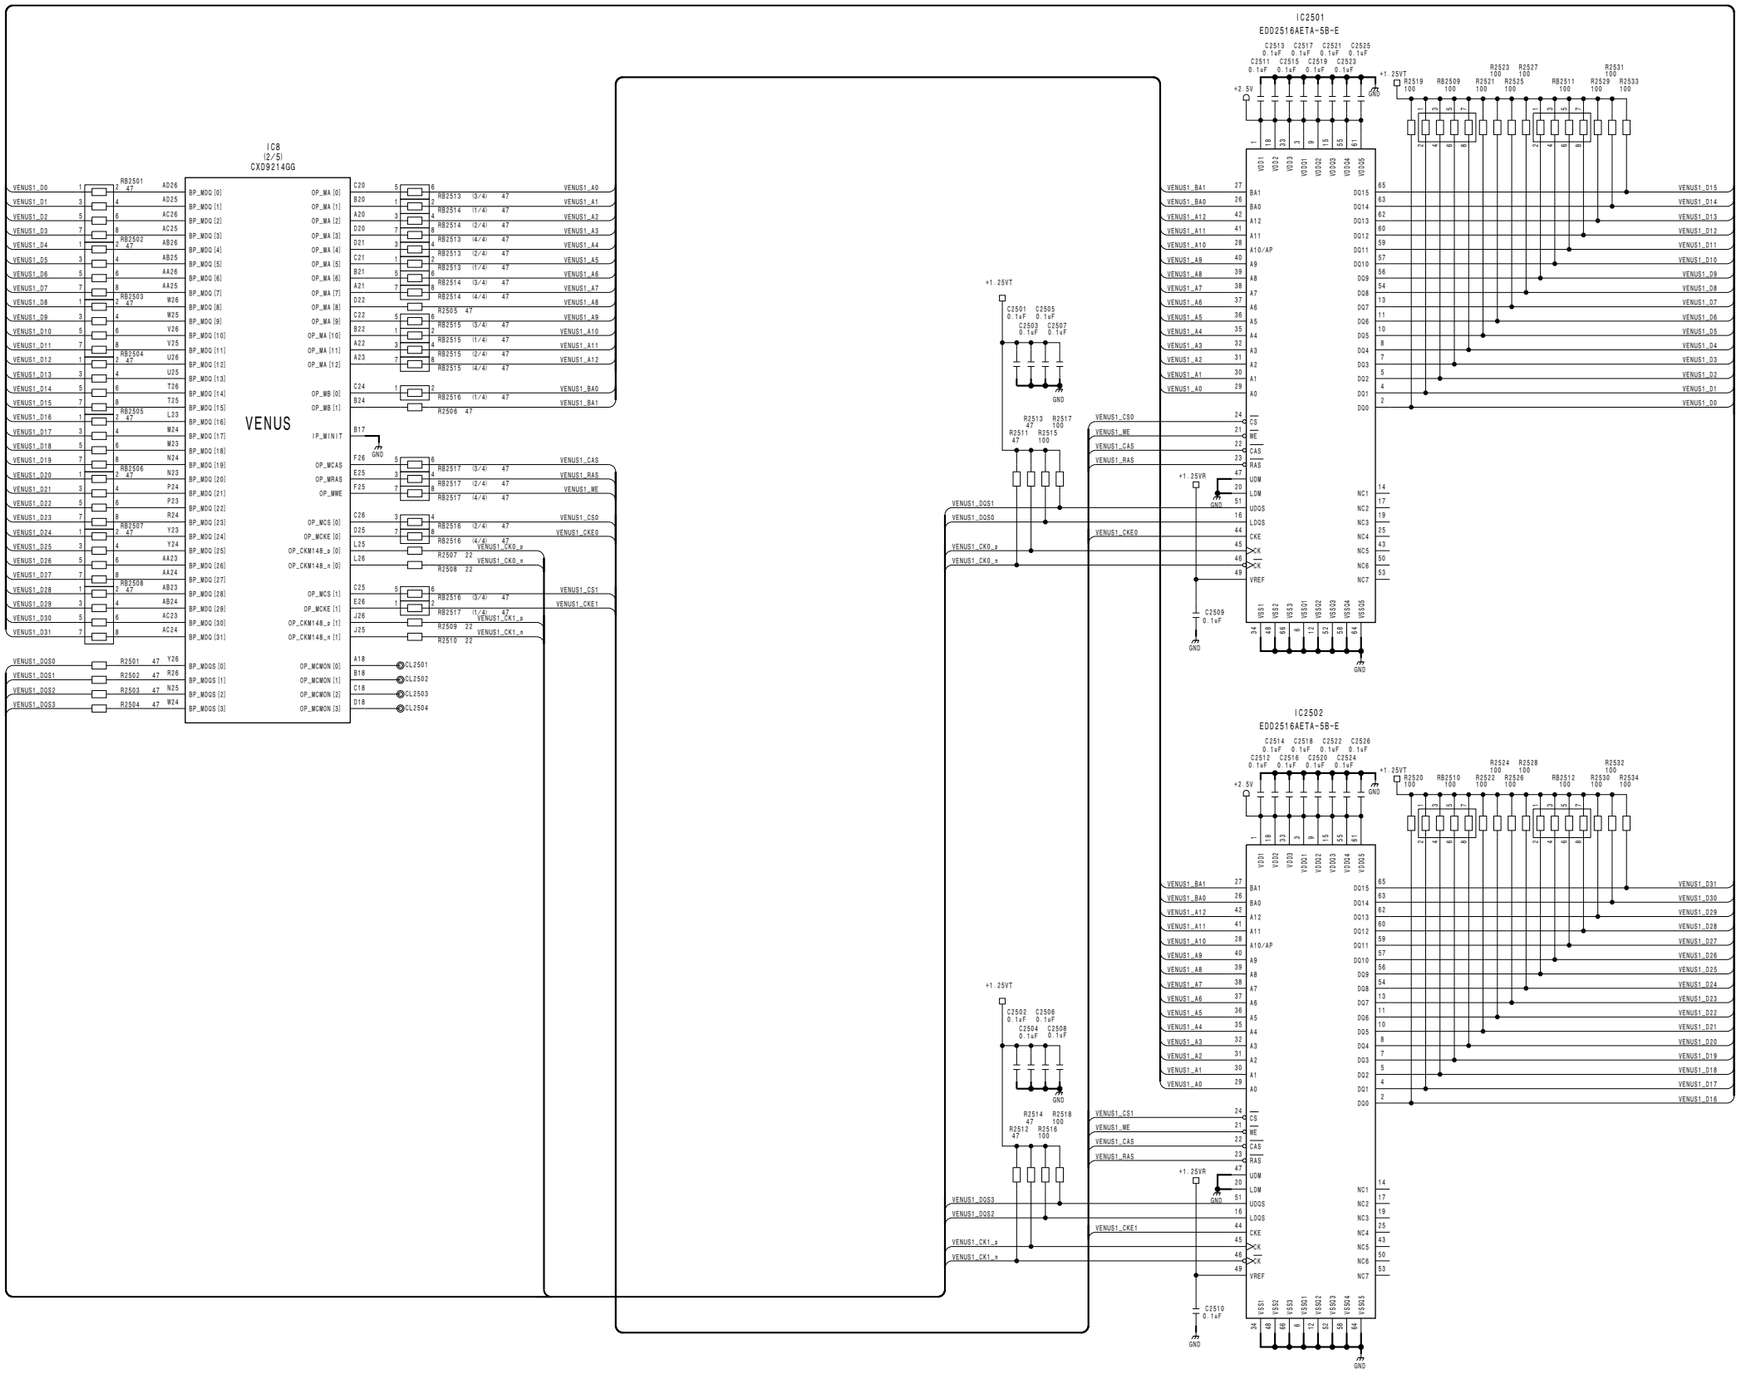



Output Board
OUT-33 (25/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_25

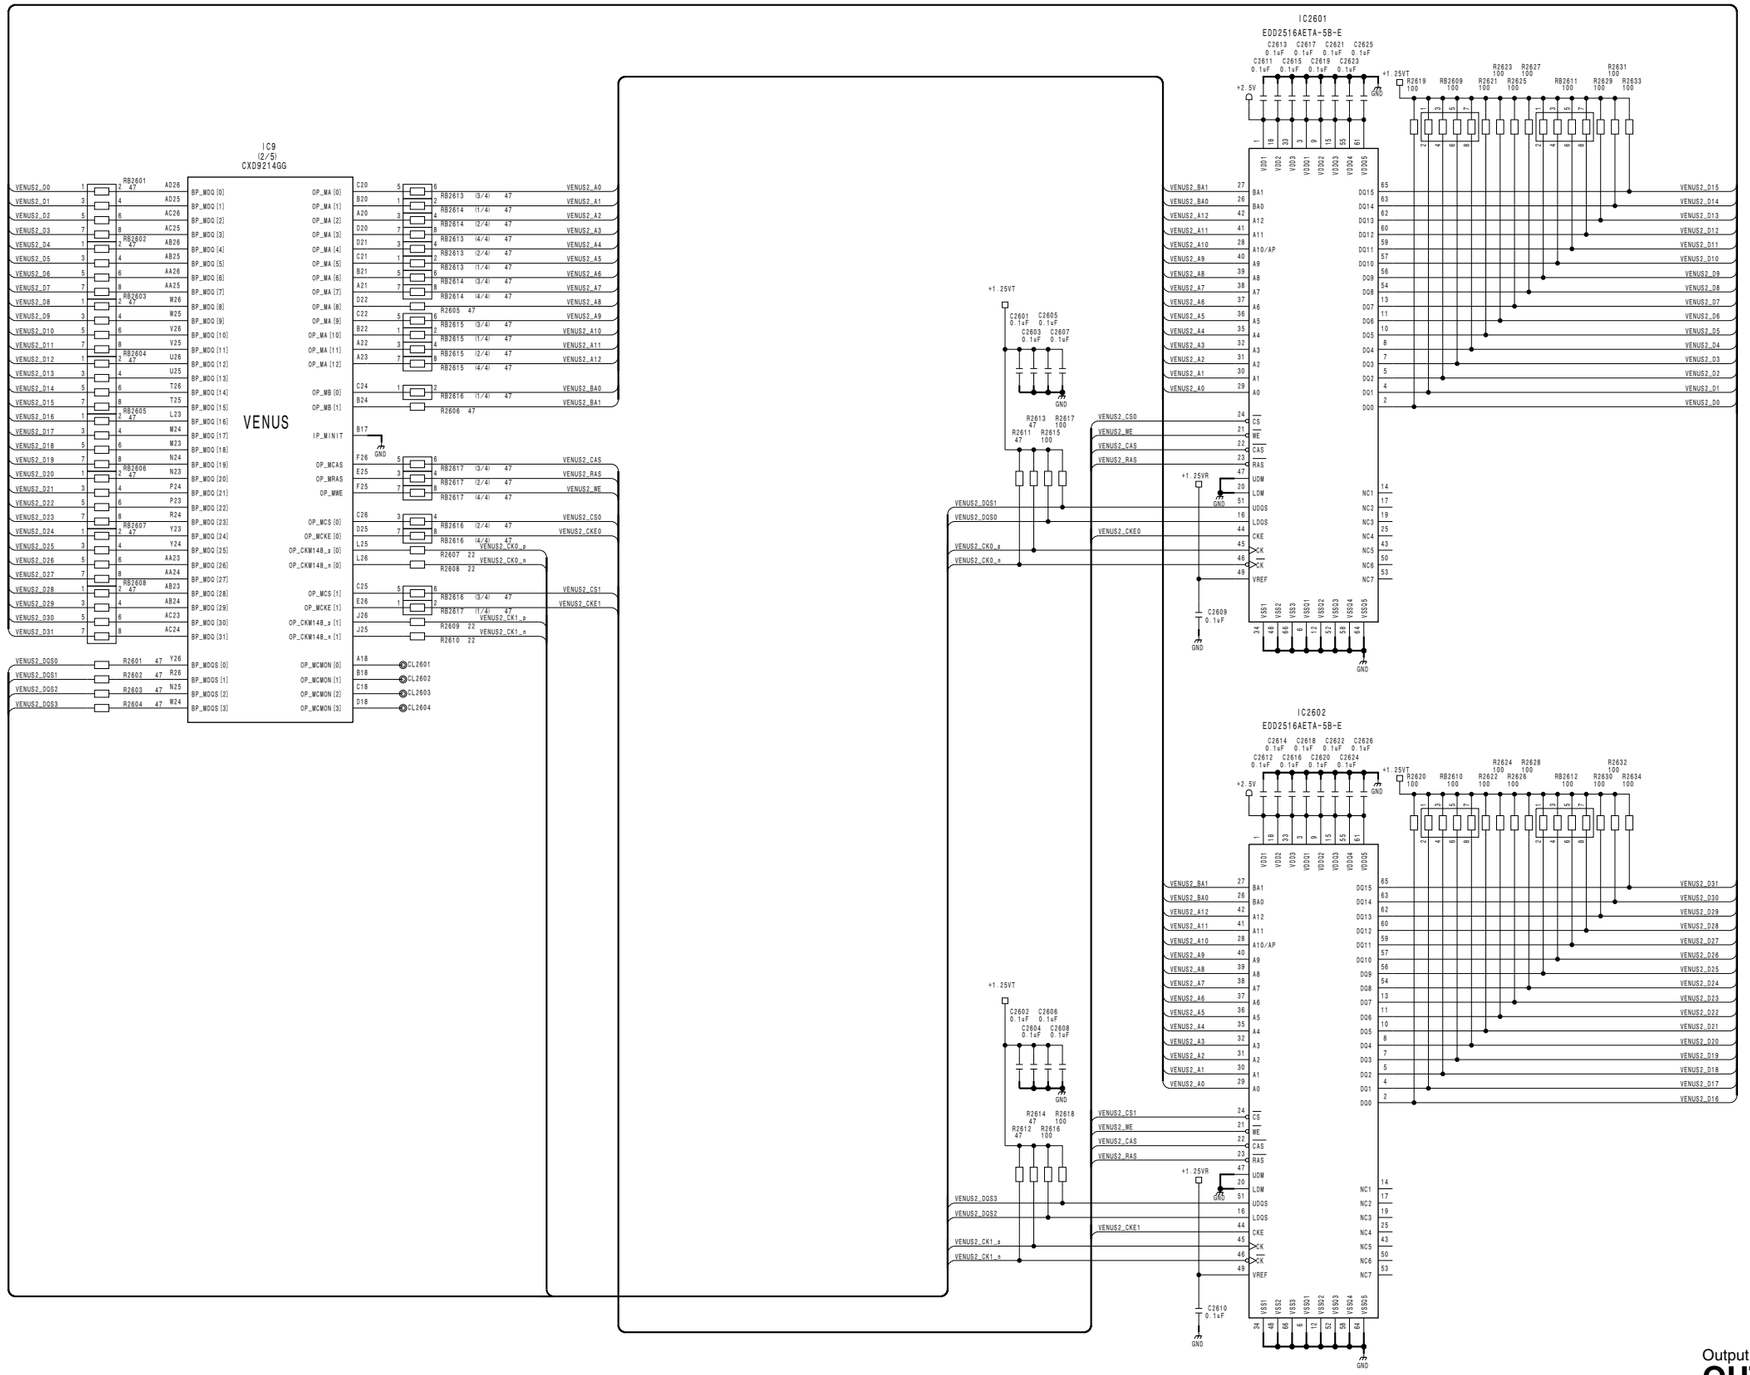



Output Board
OUT-33 (26/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_26

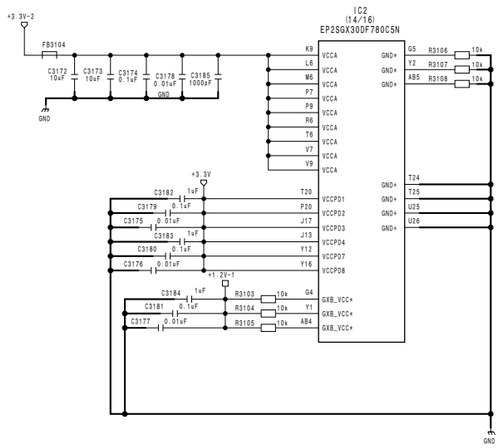




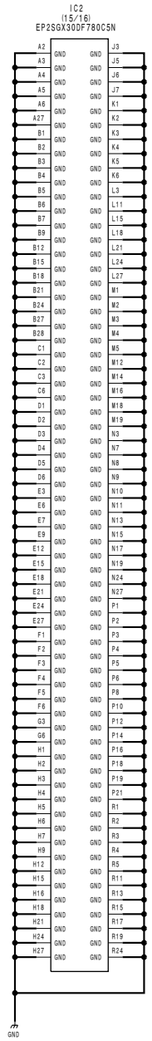

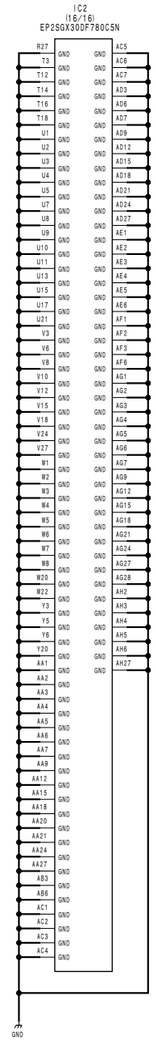


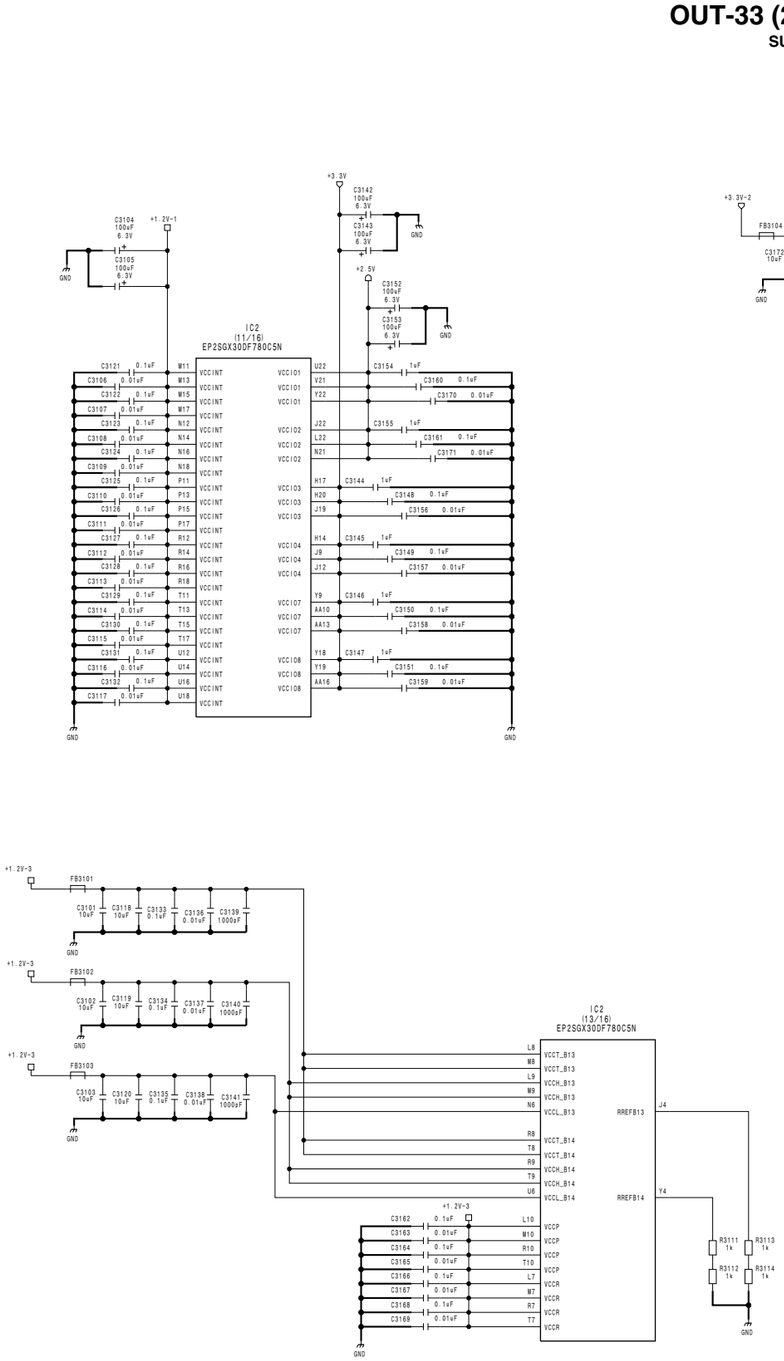


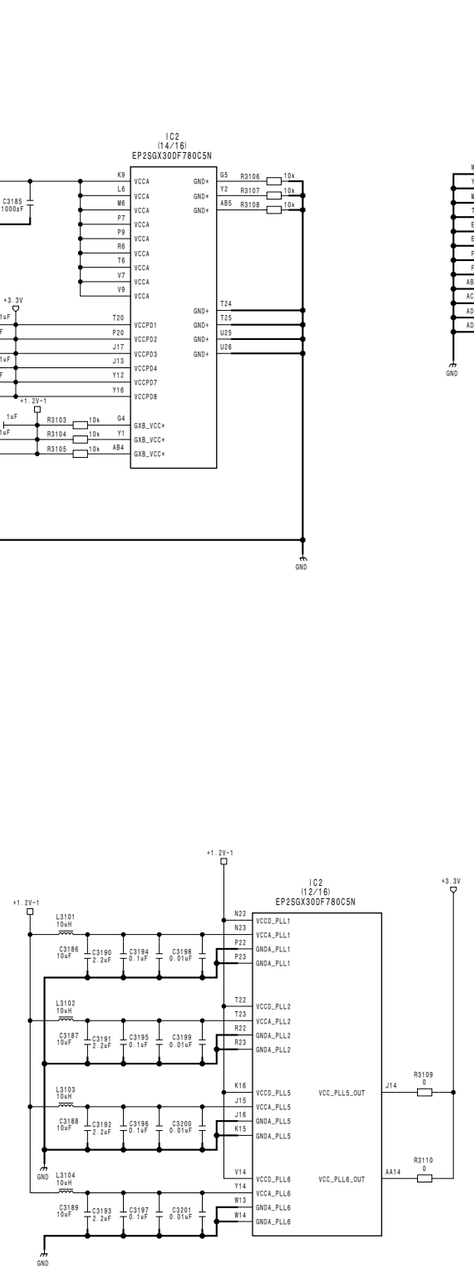



Output Board
OUT-33 (27/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_27


OUT-33 (28/35) **SUFFIX: -12**

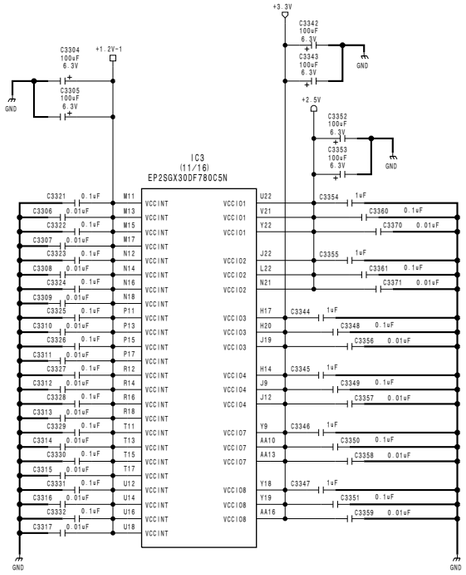


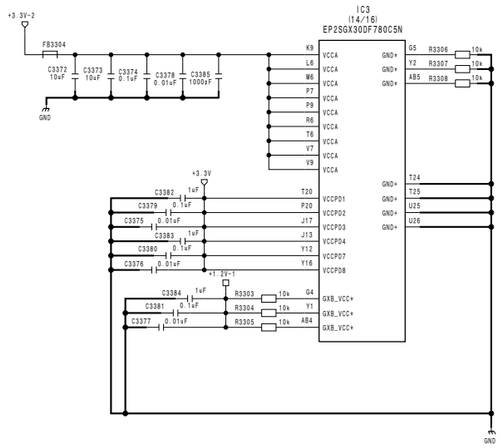









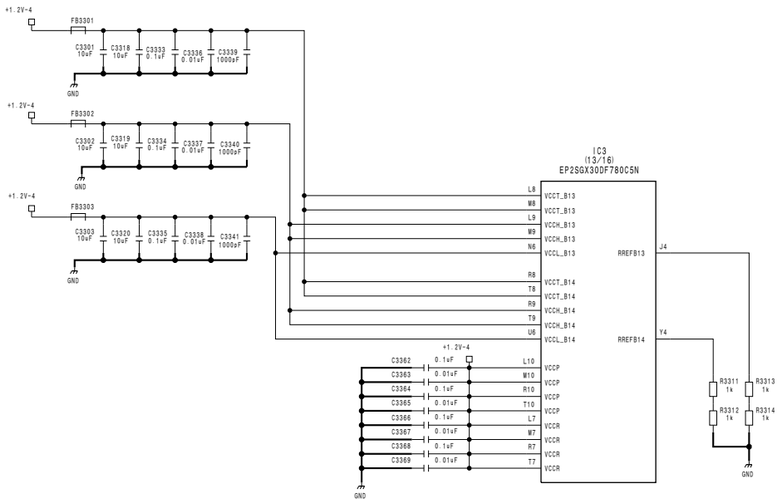


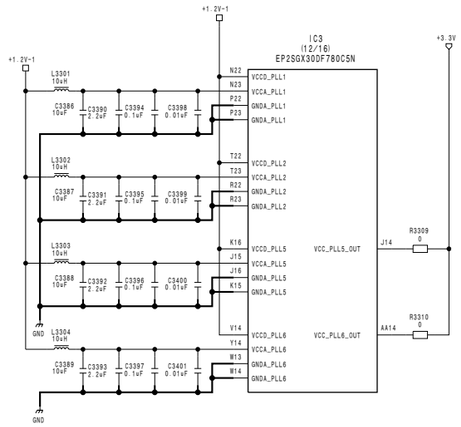



Output Board
OUT-33 (28/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_28


OUT-33 (29/35) **SUFFIX: -12**

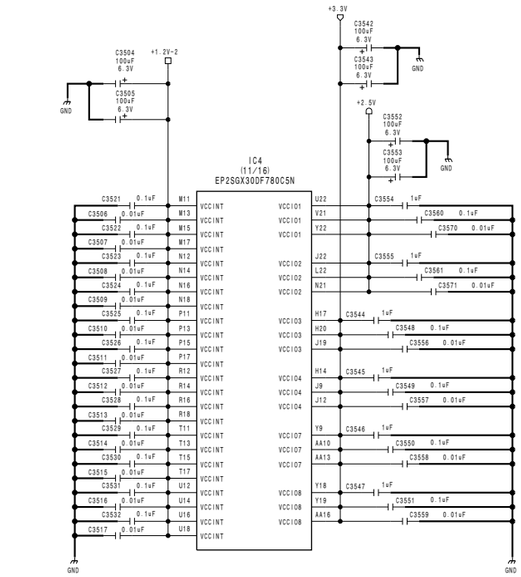


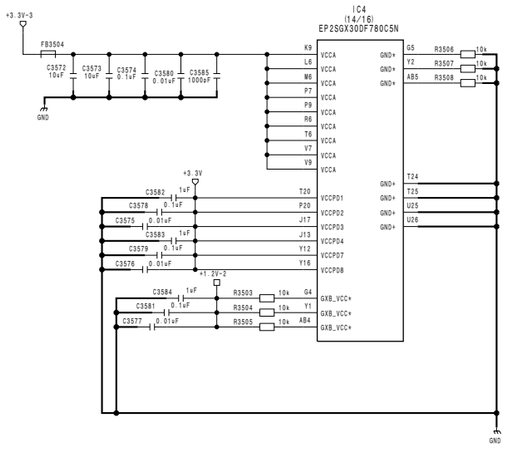




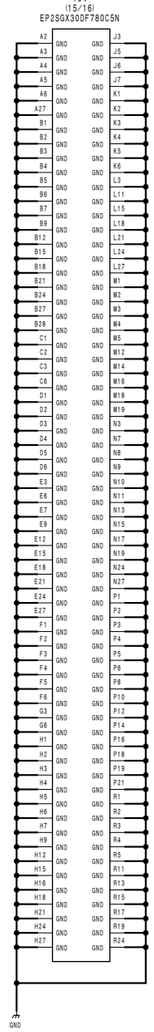

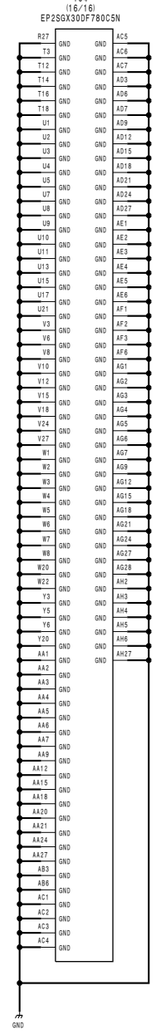

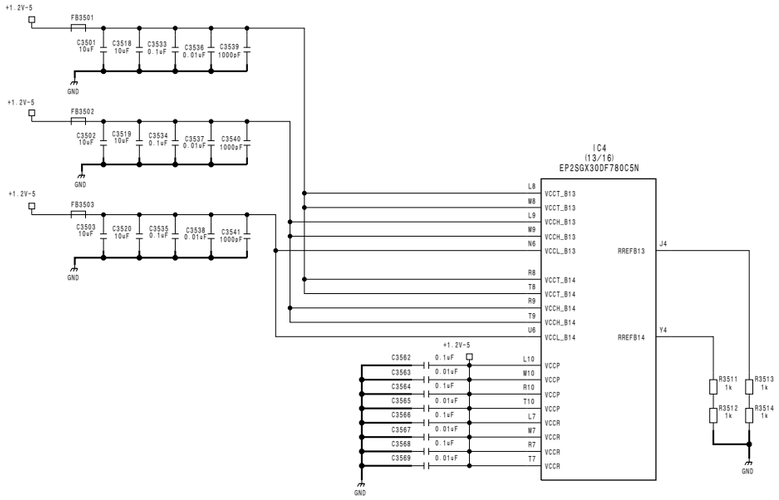

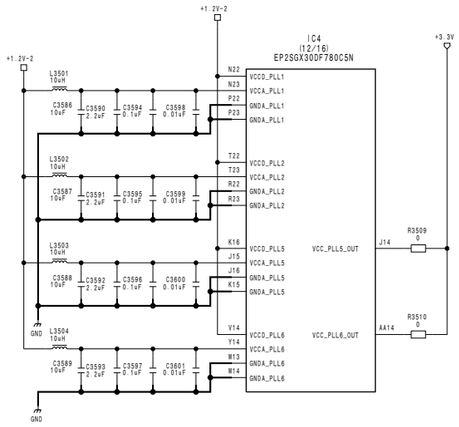


Output Board

OUT-33 (29/35)

BOARD NO. 1-877-211-12

MVS-6000_OUT-33_002_29


OUT-33 (30/35) **SUFFIX: -12**

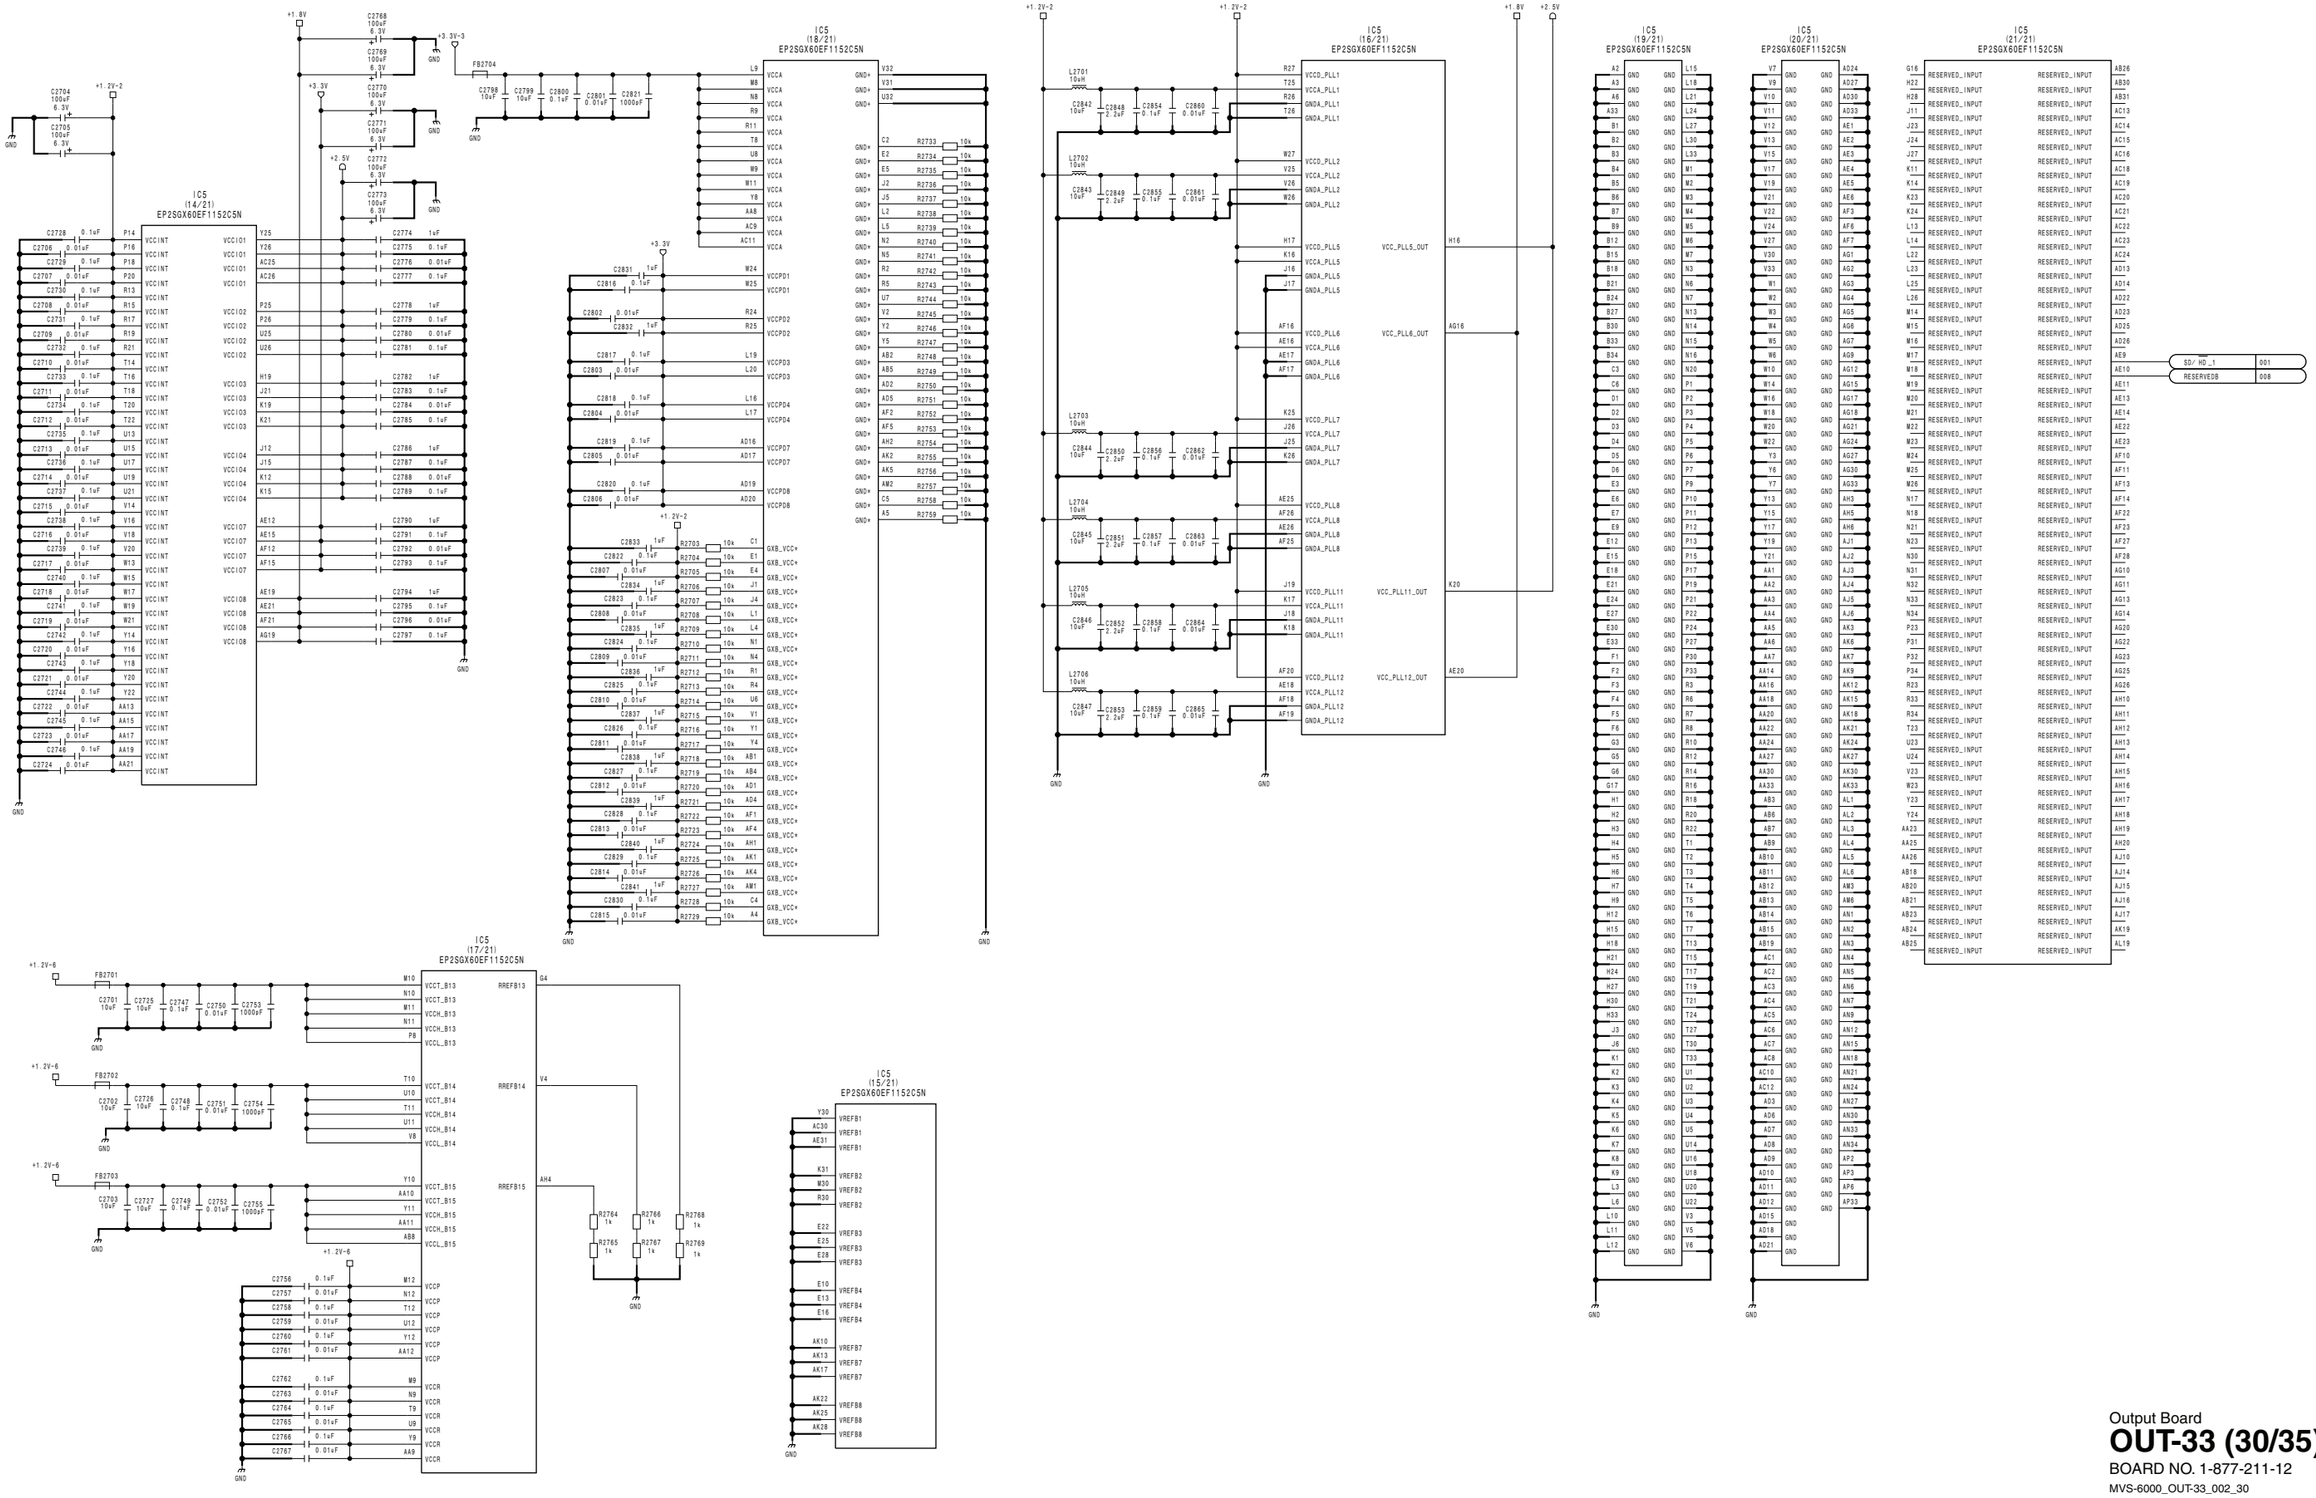



4-267


Output Board
OUT-33 (30/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_30


OUT-33 (31/35) **SUFFIX: -12**

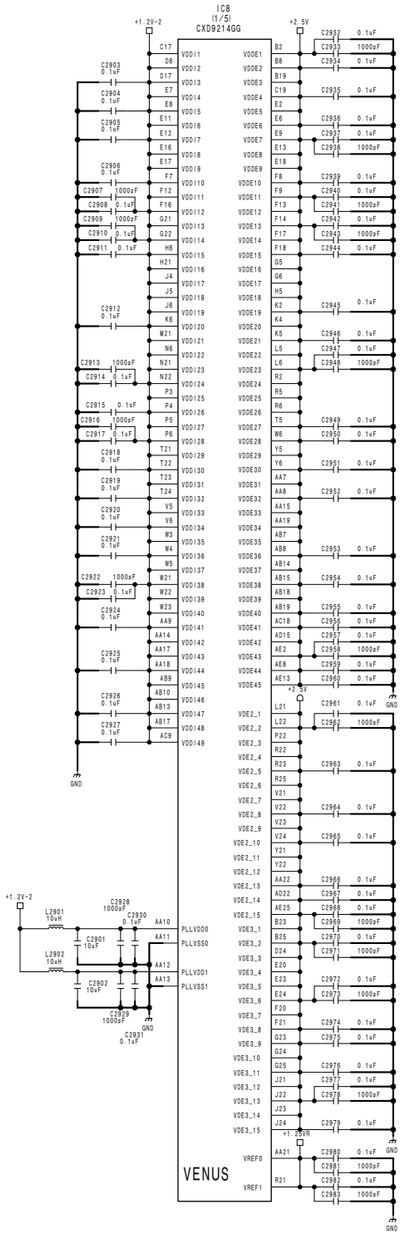

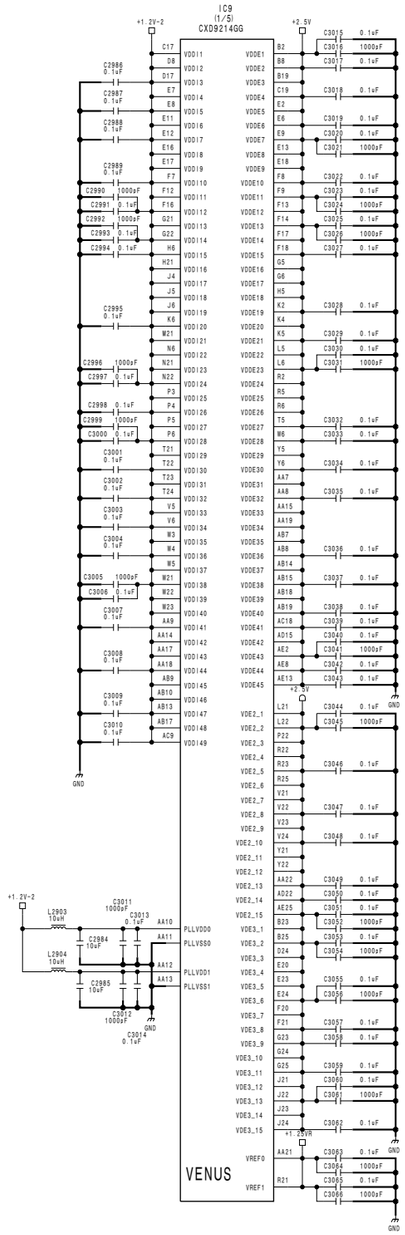

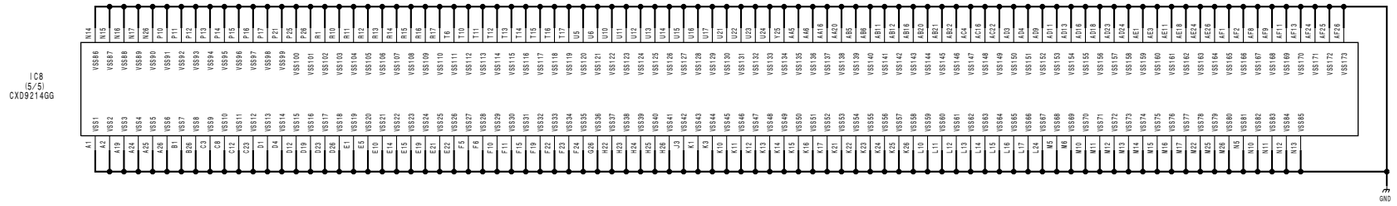


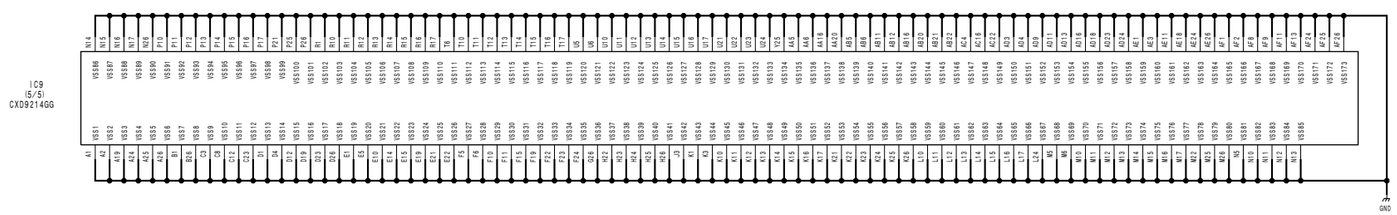

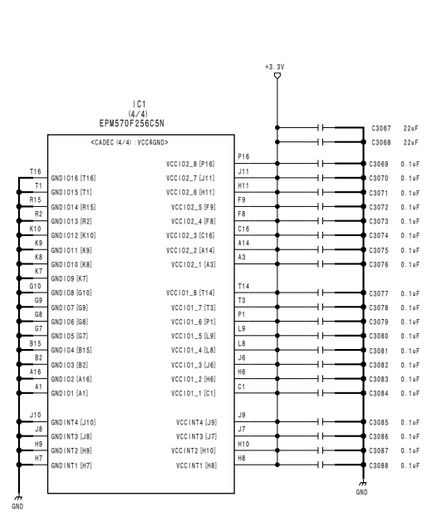

Output Board
OUT-33 (31/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_31


OUT-33 (32/35)
SUFFIX: -12

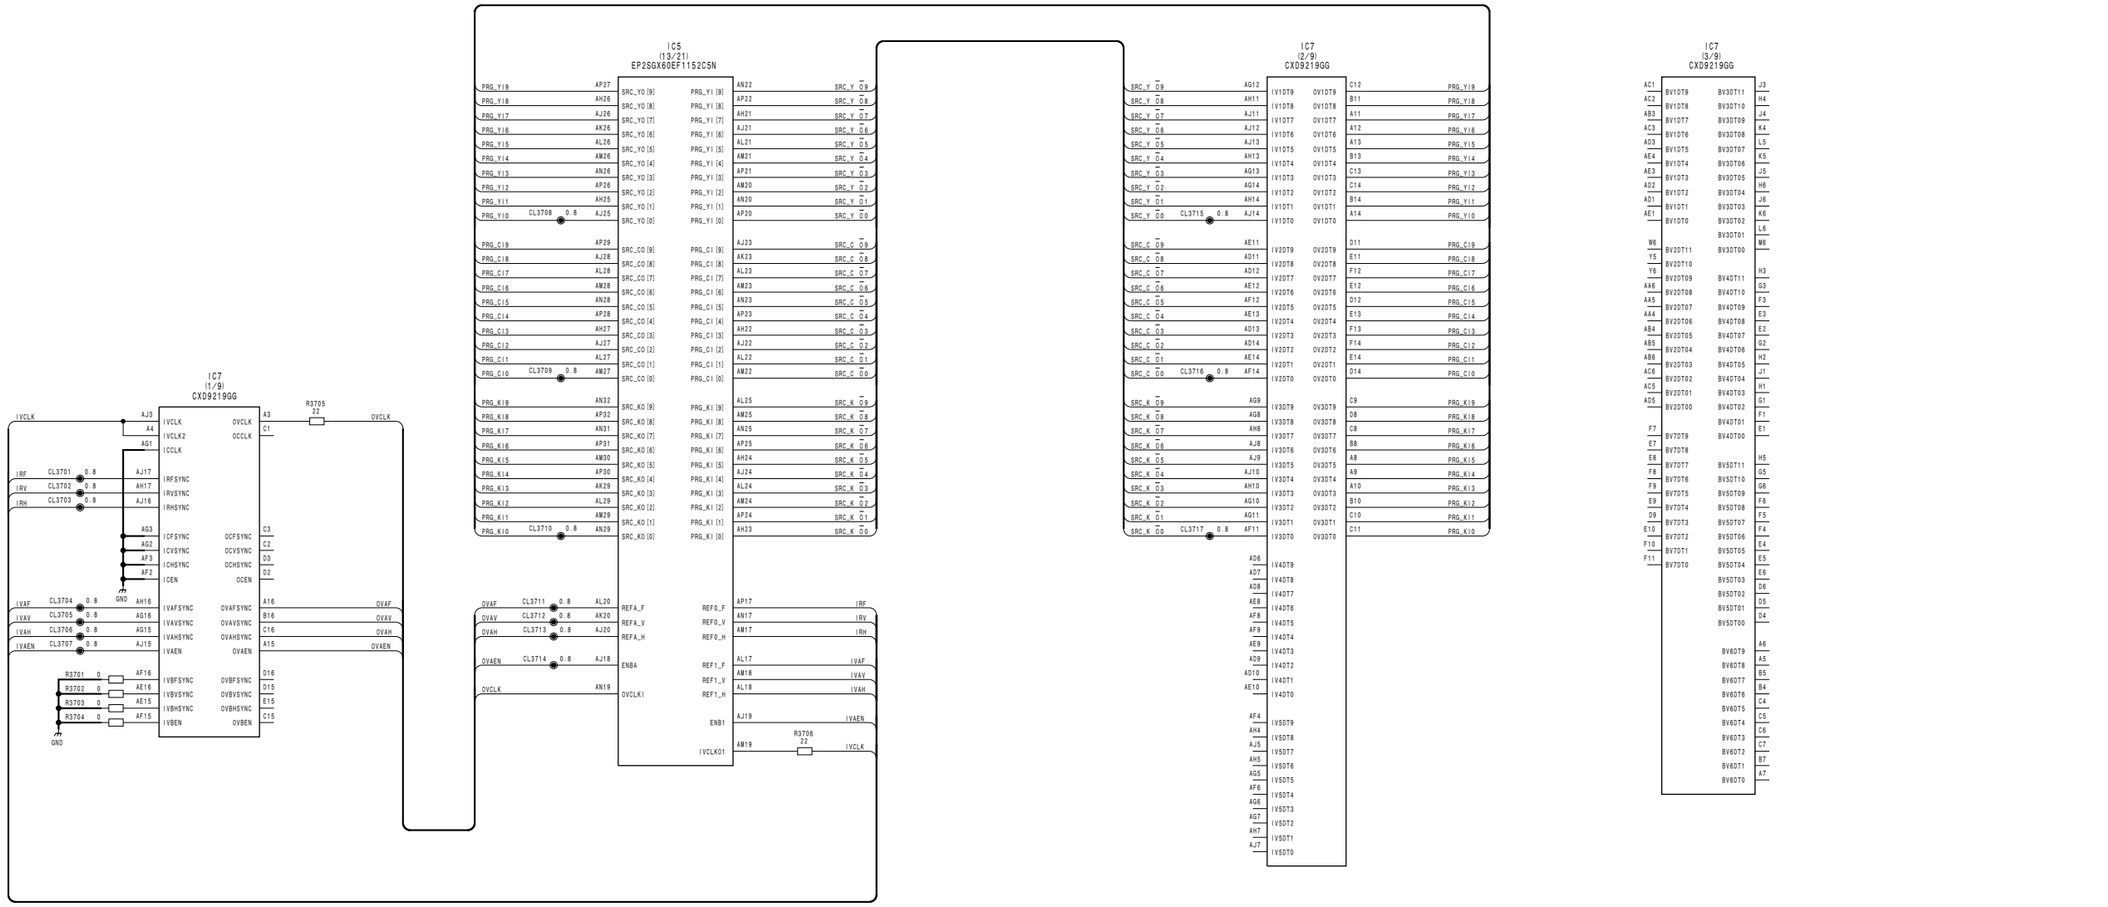

4-269

Output Board
OUT-33 (32/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_32


OUT-33 (33/35)
SUFFIX: -12

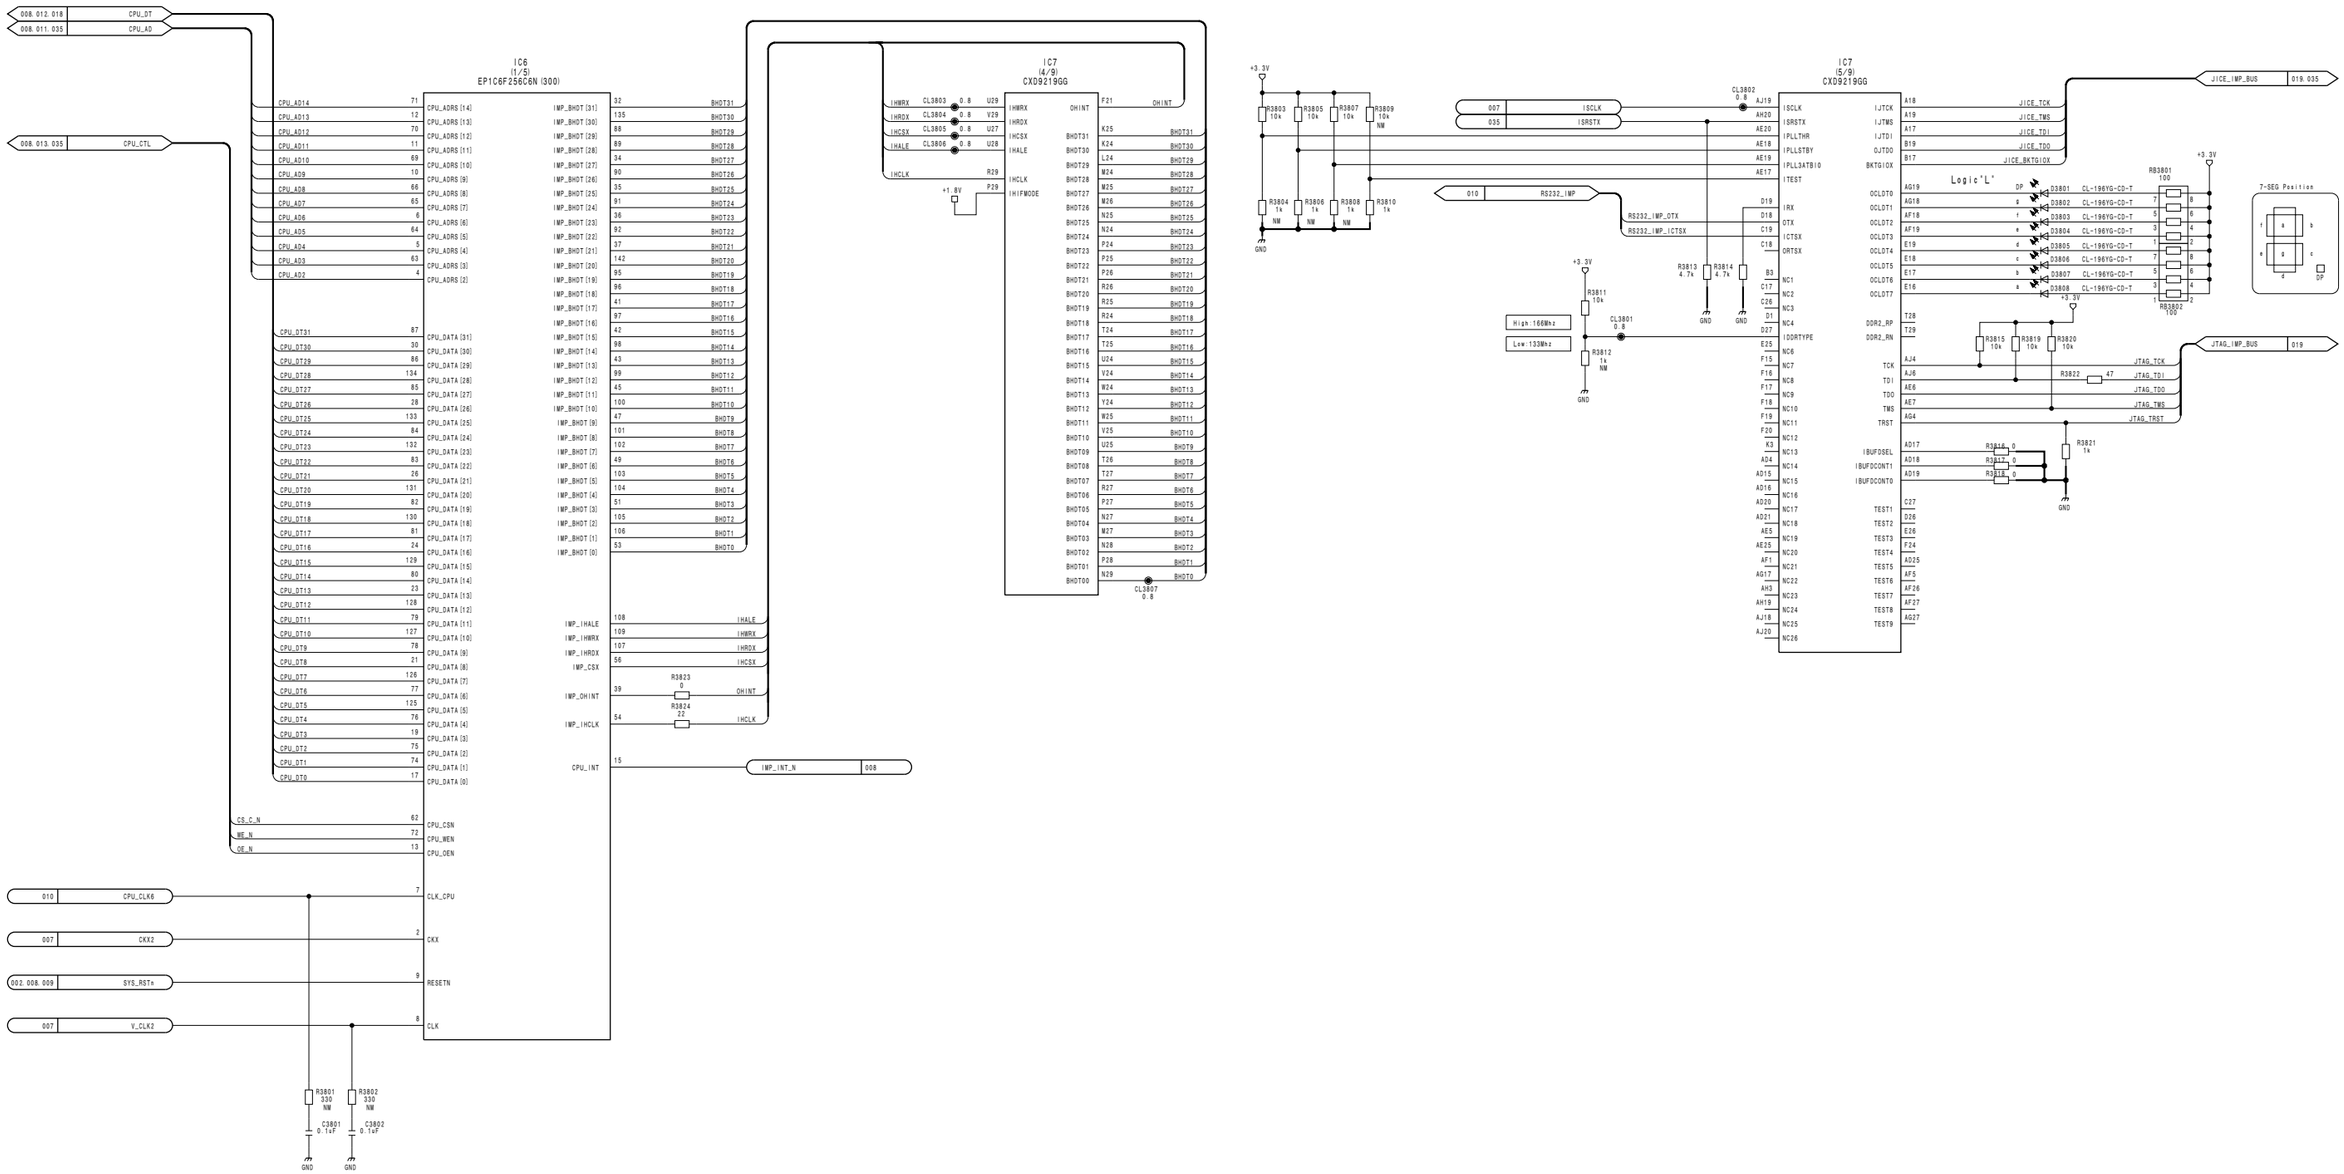


4-270

Output Board
OUT-33 (33/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_33


MVS-6000 MM

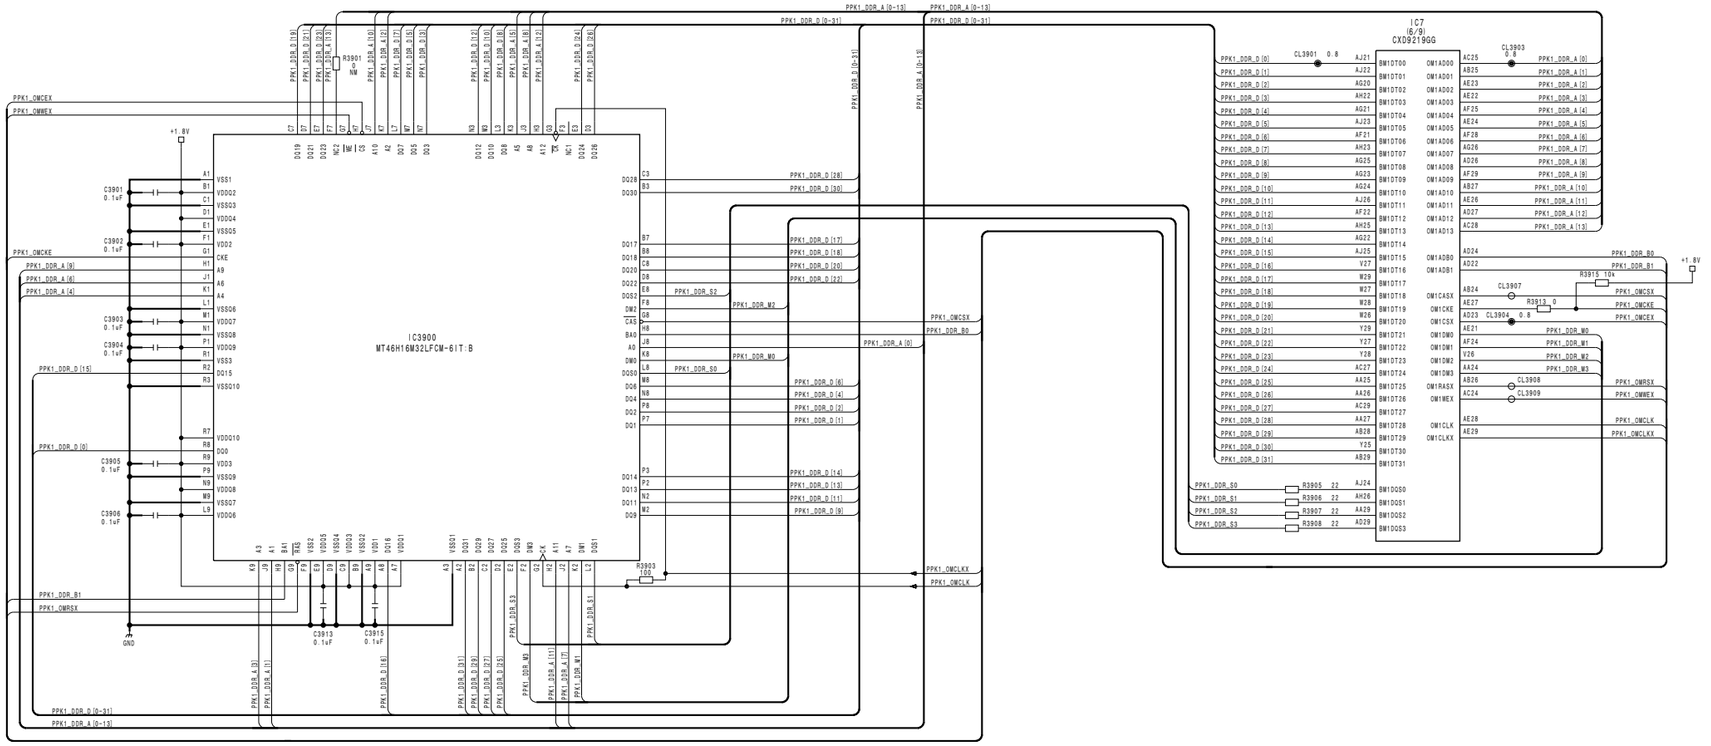


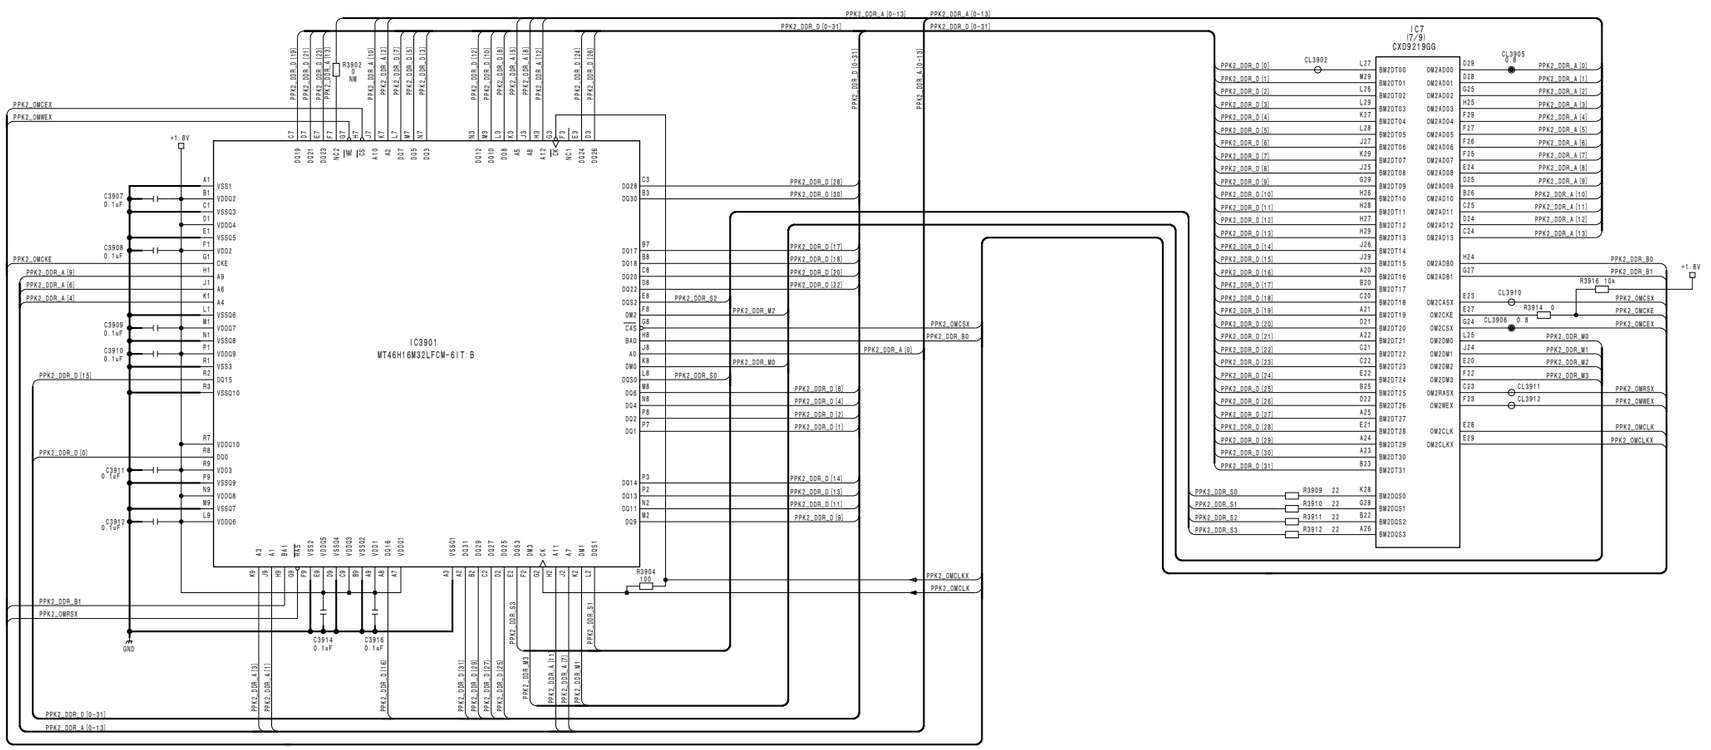



Output Board
OUT-33 (34/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_34

OUT-33 (35/35)
SUFFIX: -12

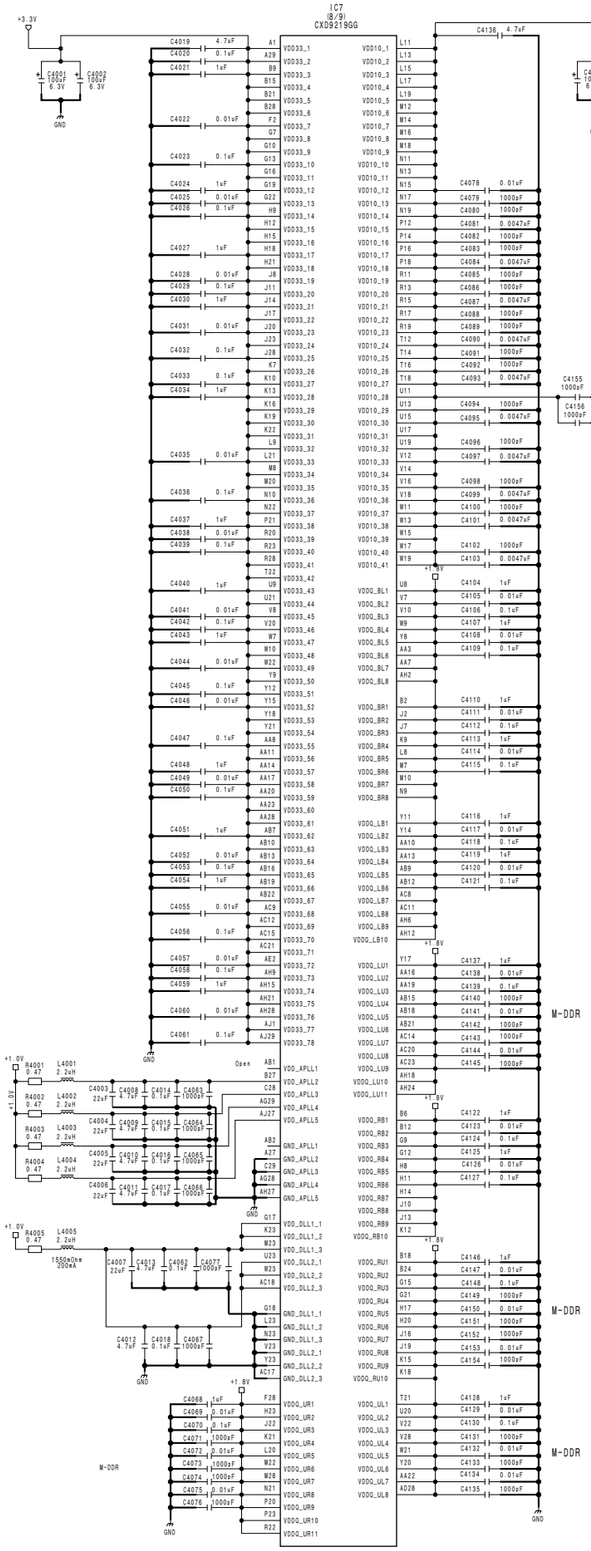

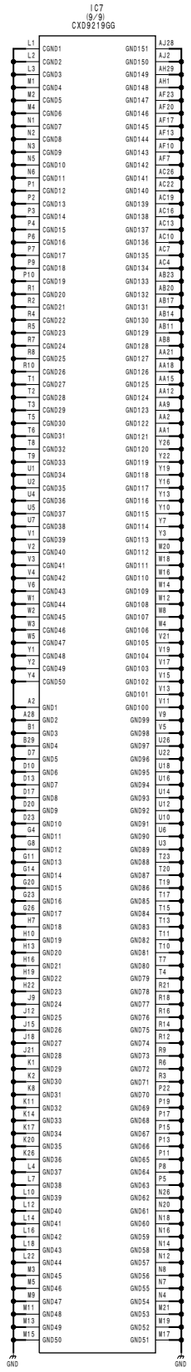

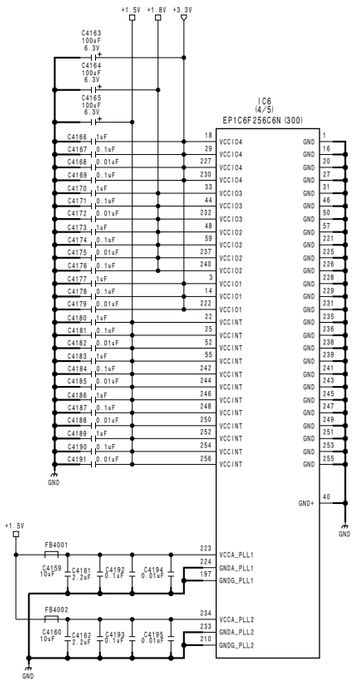


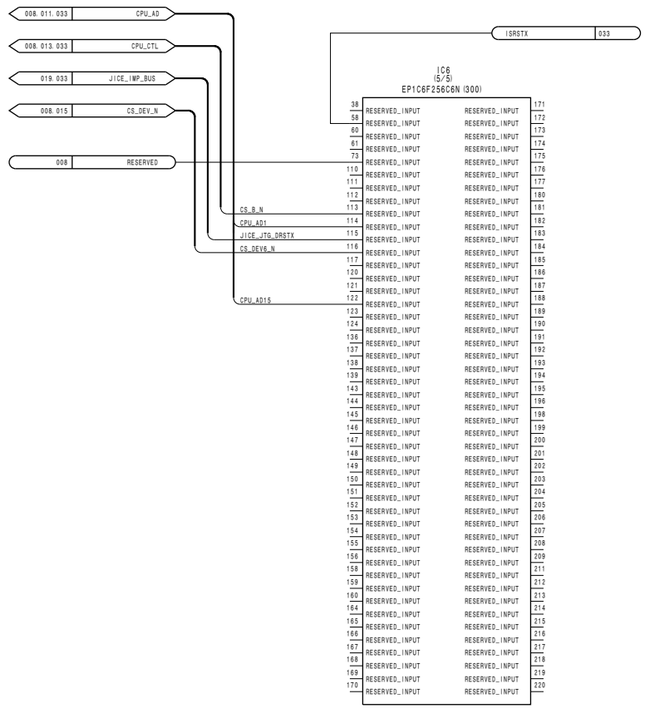

4-272


Output Board
OUT-33 (35/35)
BOARD NO. 1-877-211-12
MVS-6000_OUT-33_002_35

SG-272 (1/3)
SUFFIX: -22

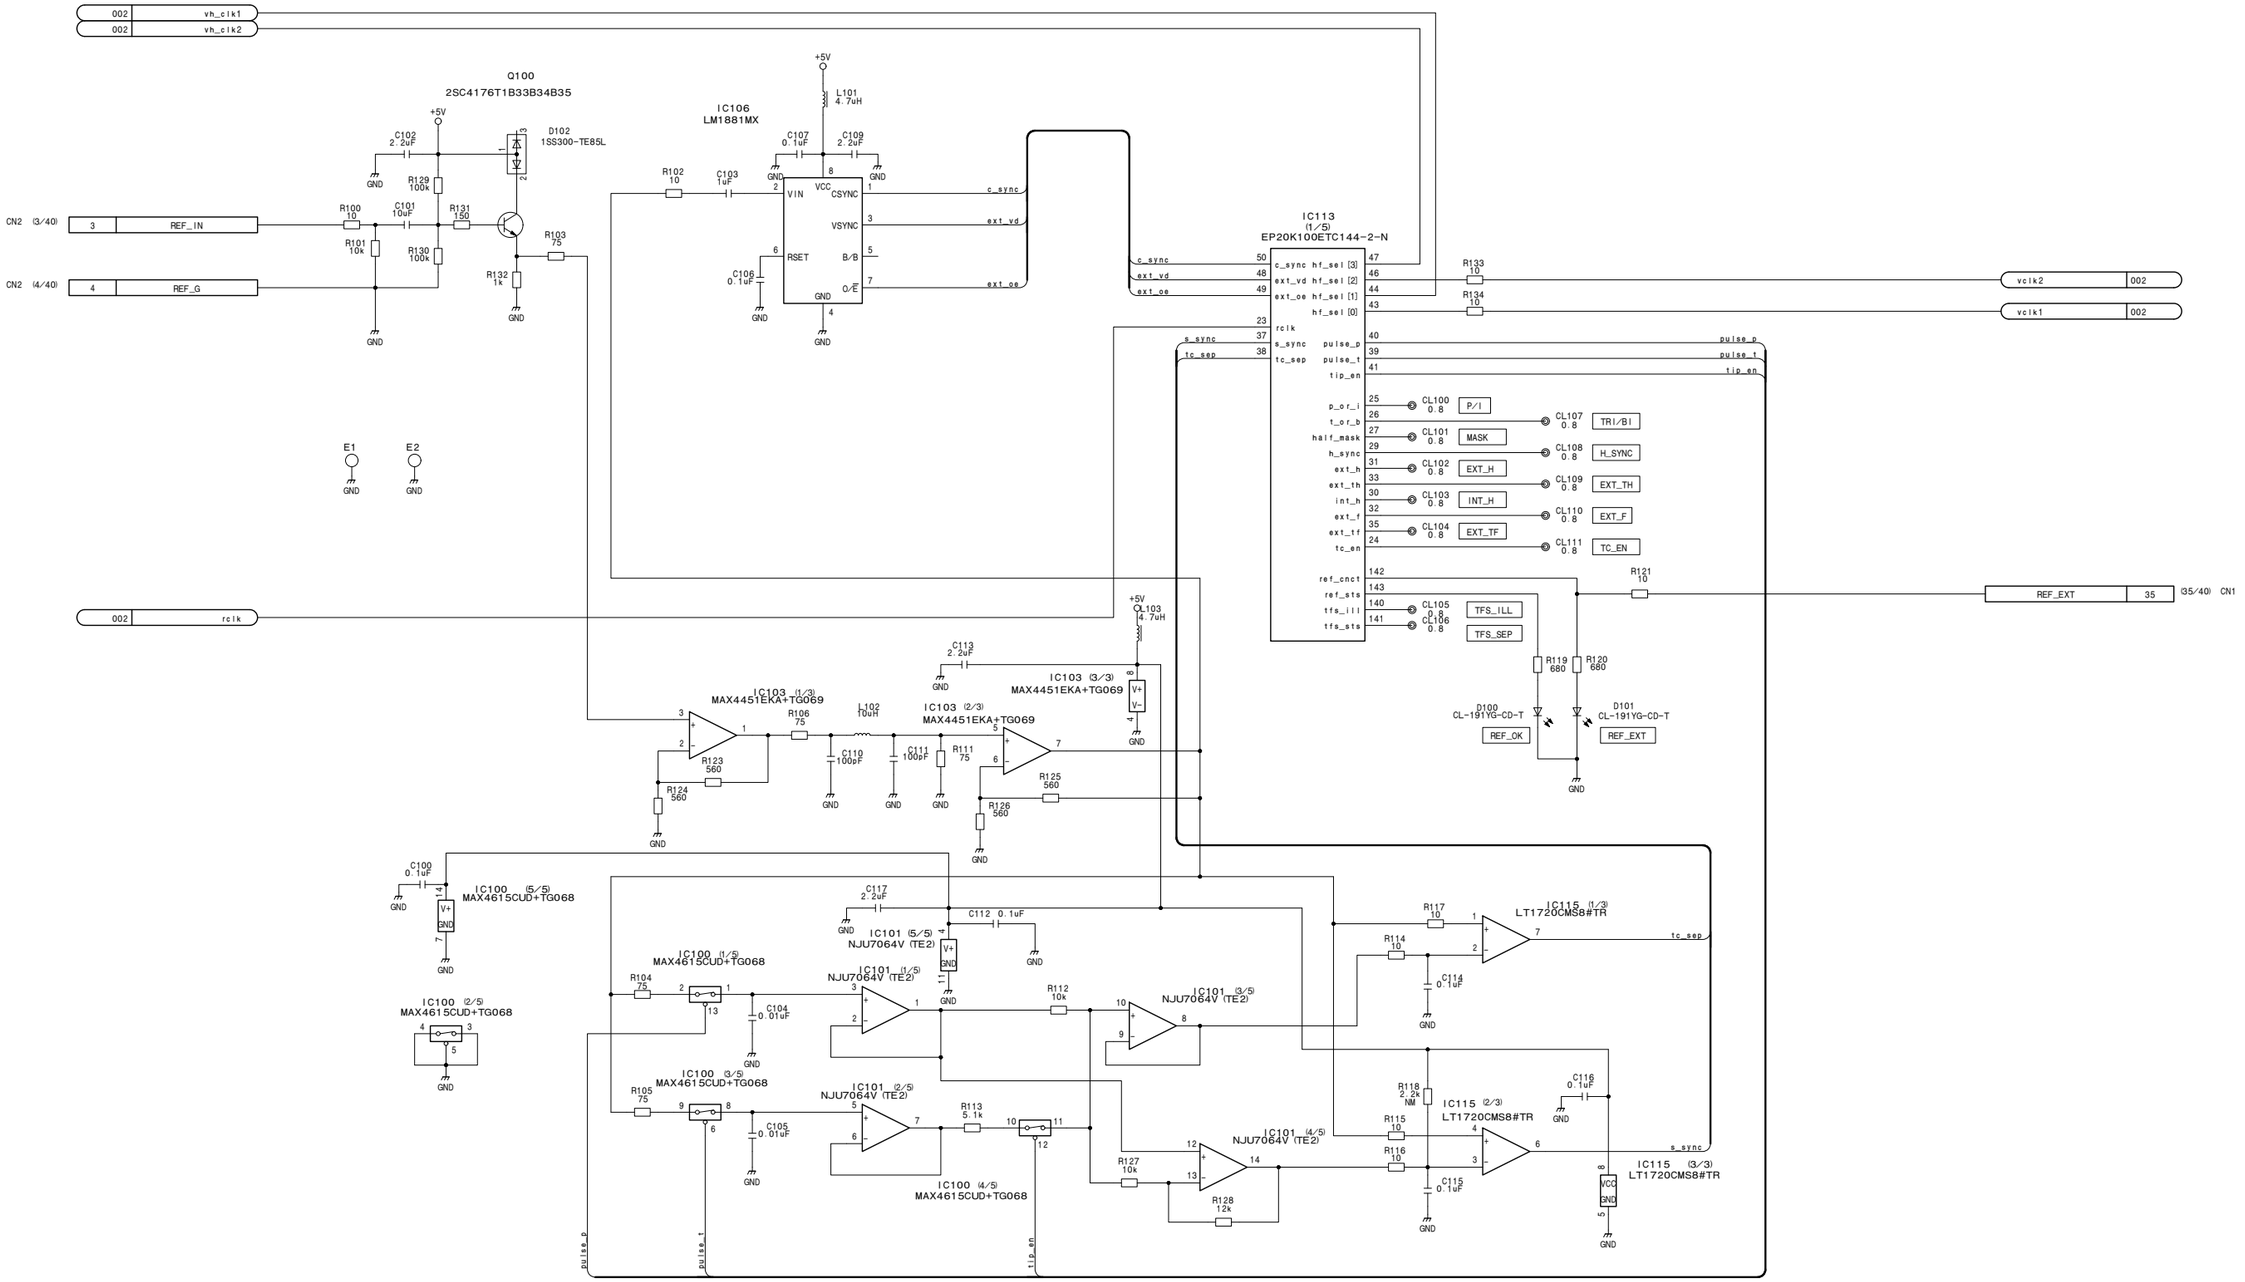


Signal Generator Board
SG-272 (1/3)
BOARD NO. 1-681-842-22
SJX-215_SG-272_022_1


SG-272 (2/3)
SUFFIX: -22

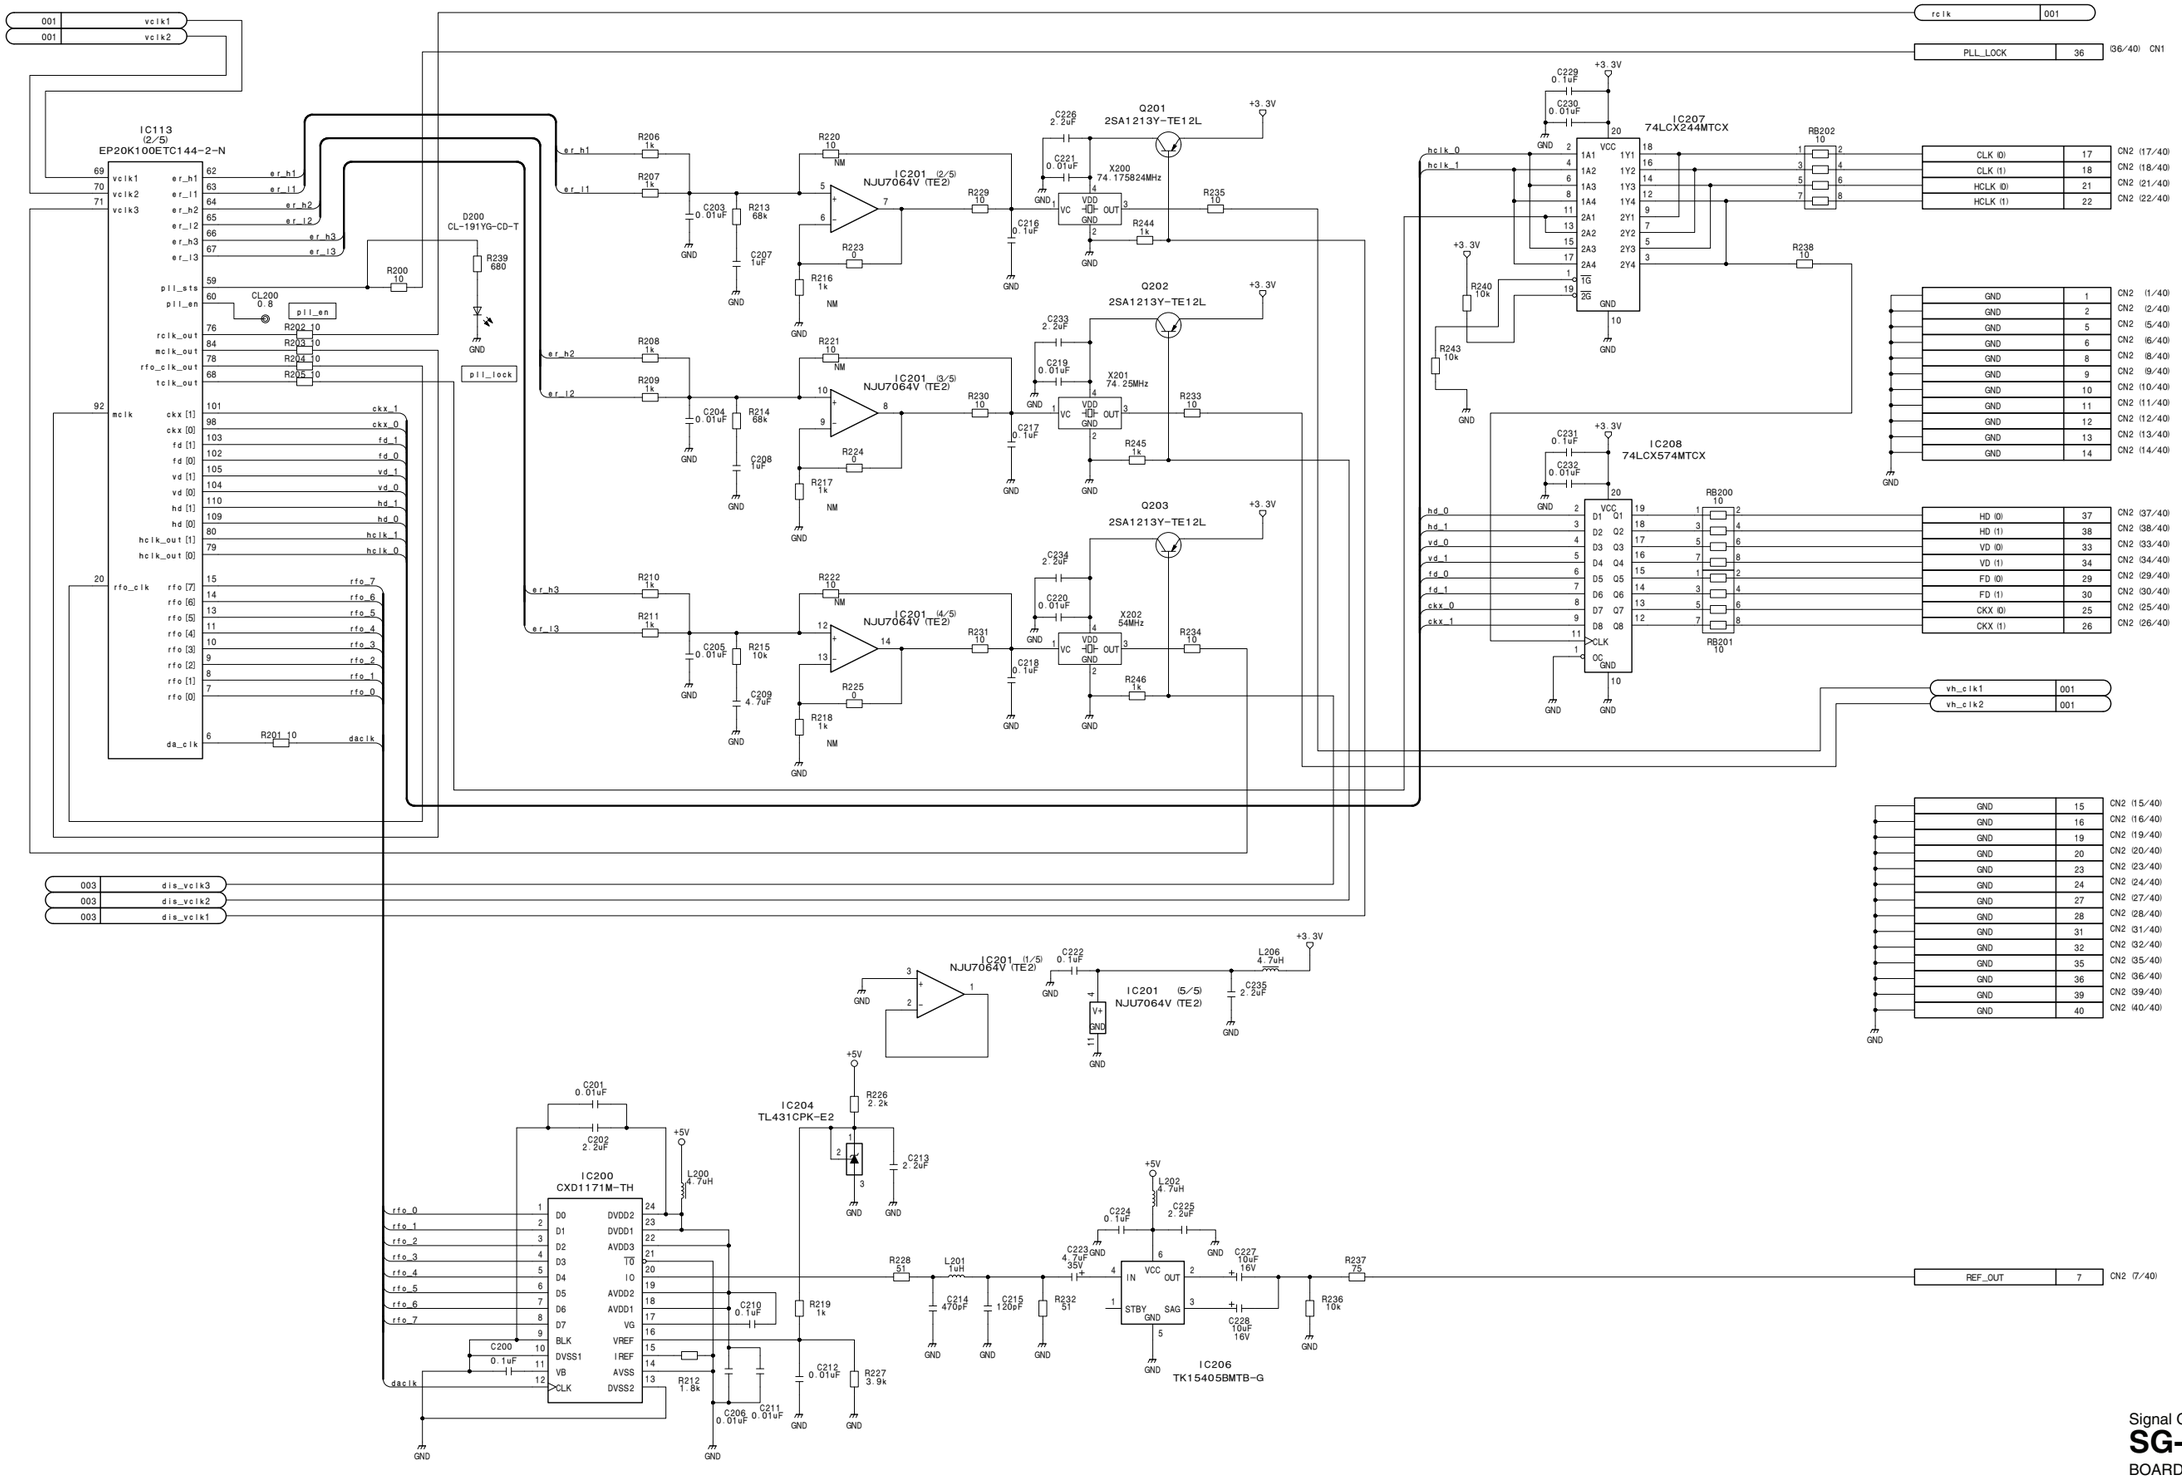

Signal Generator Board
SG-272 (2/3)
BOARD NO. 1-681-842-22
SJX-215_SG-272_022_2

SG-272 (3/3) **SUFFIX: -22**

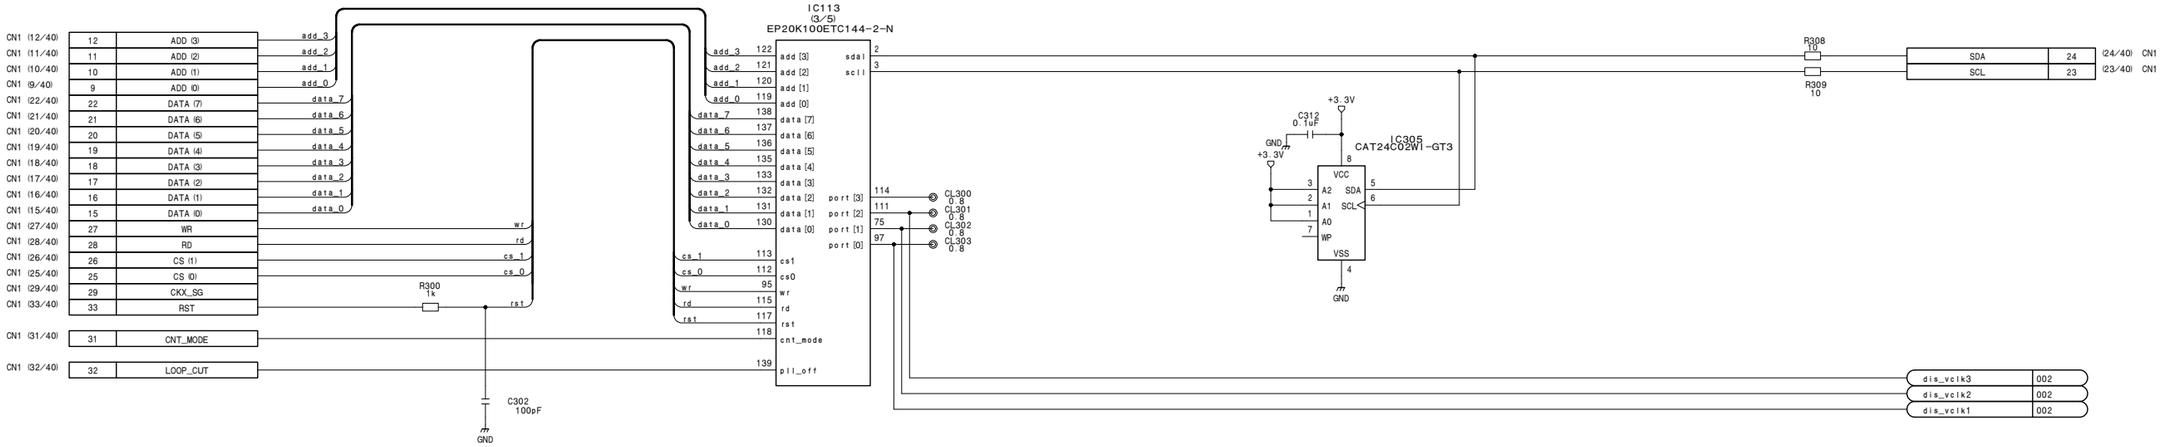


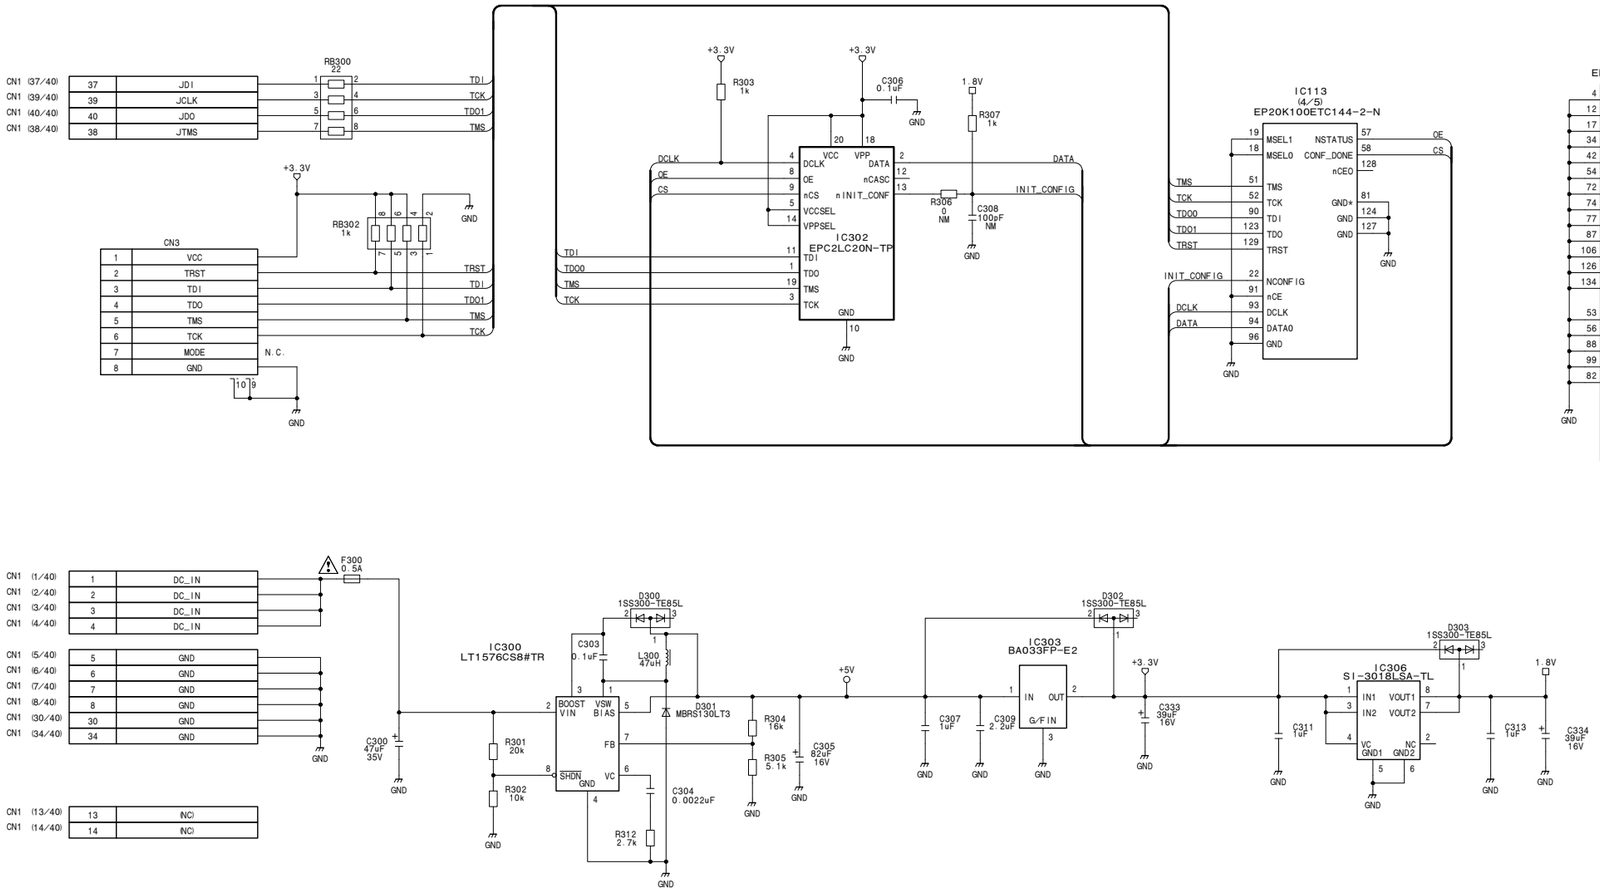



Signal Generator Board
SG-272 (3/3)
BOARD NO. 1-681-842-22
SJX-215_SG-272_022_3


SIO-26 (1/5)
SUFFIX: -11

SIO-26 (1/5)
SUFFIX: -11

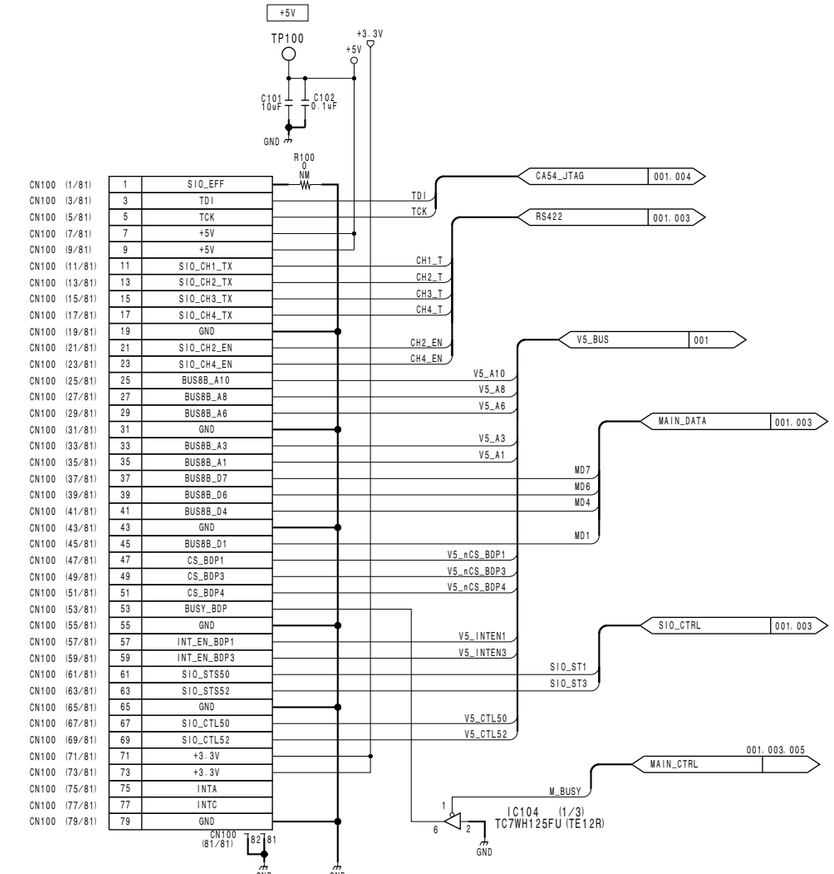

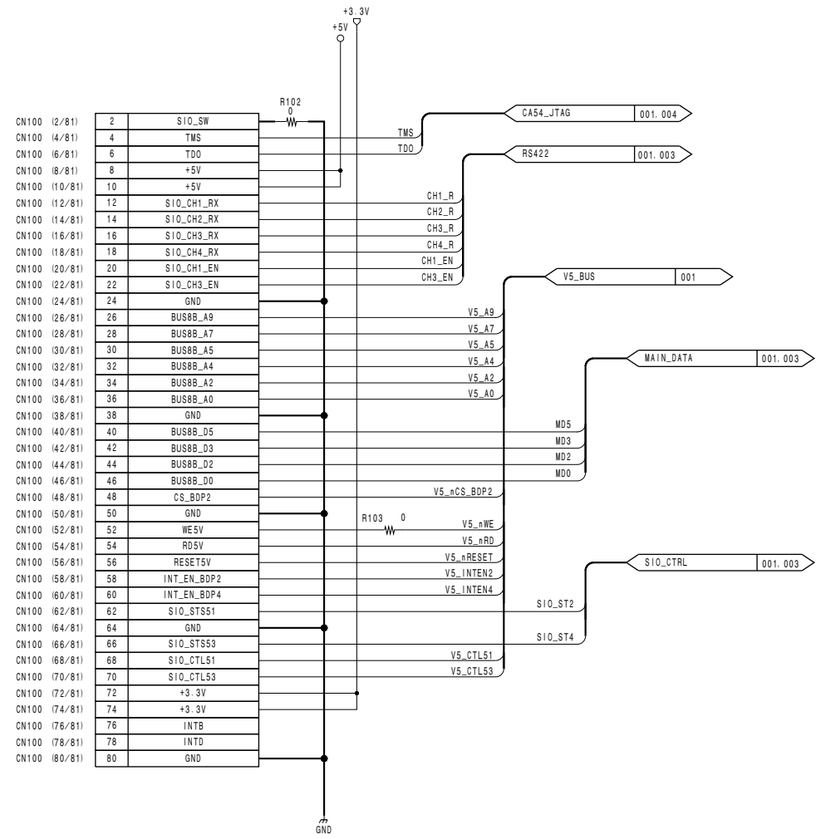


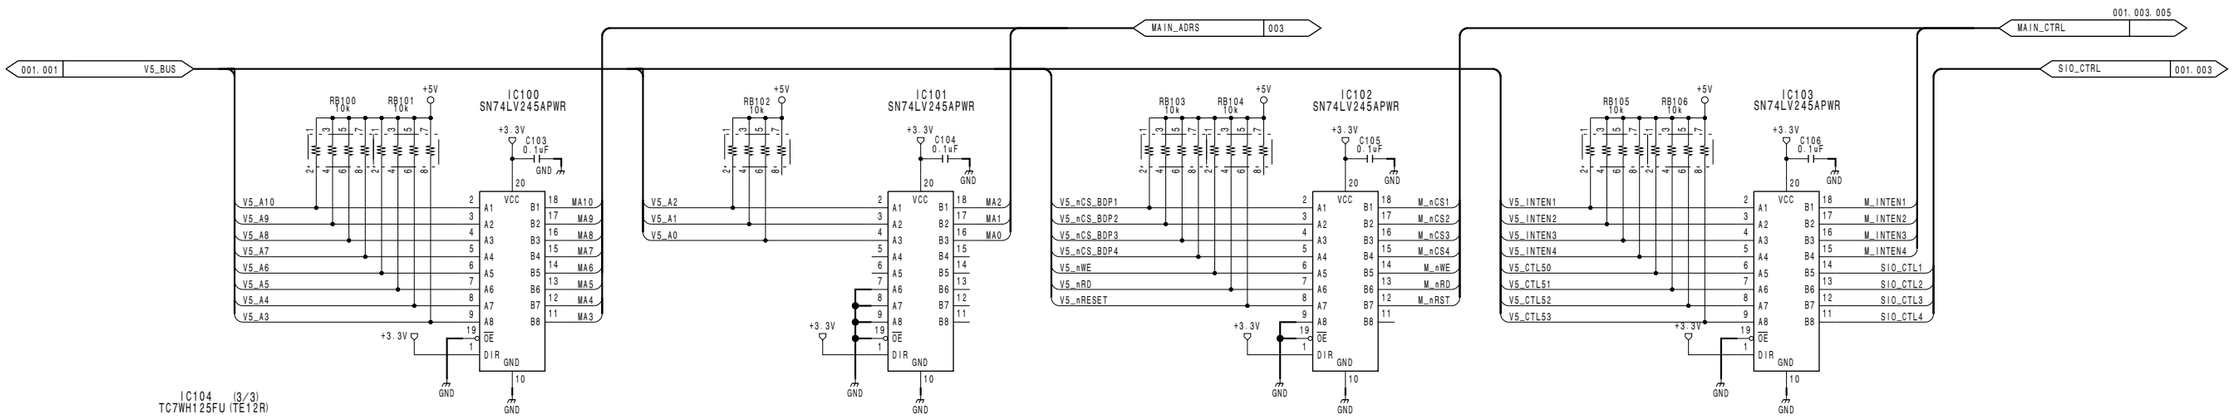




Serial Interface Board
SIO-26 (1/5)
BOARD NO. 1-862-225-11
SJX-283_SIO-26_001_1


SIO-26 (2/5)
SUFFIX: -11

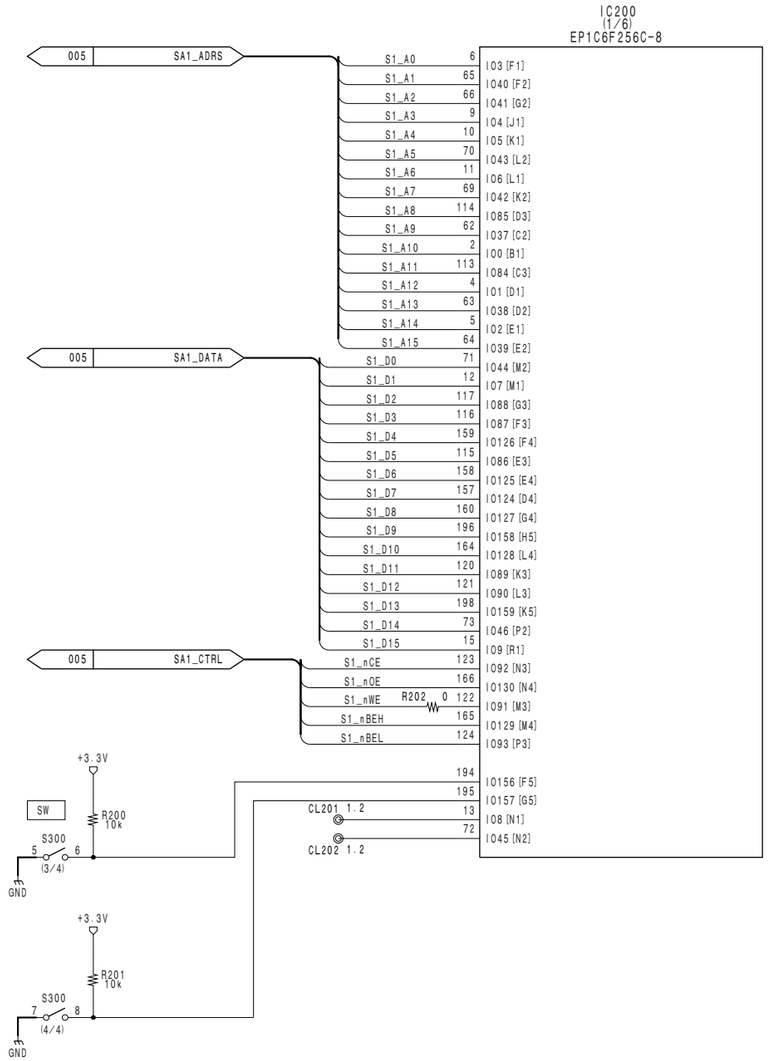


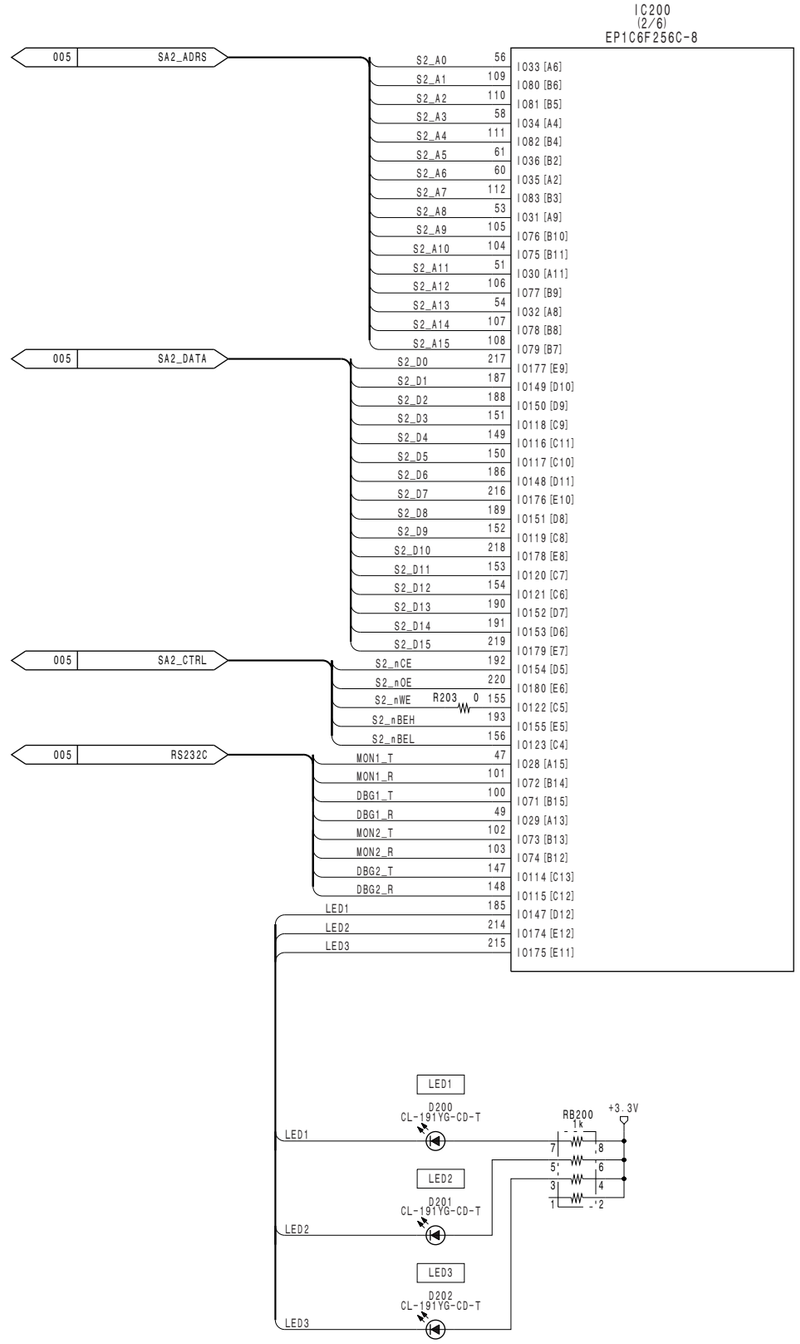


Serial Interface Board
SIO-26 (2/5)
BOARD NO. 1-862-225-11
SJX-283_SIO-26_001_2


SIO-26 (3/5)
SUFFIX: -11

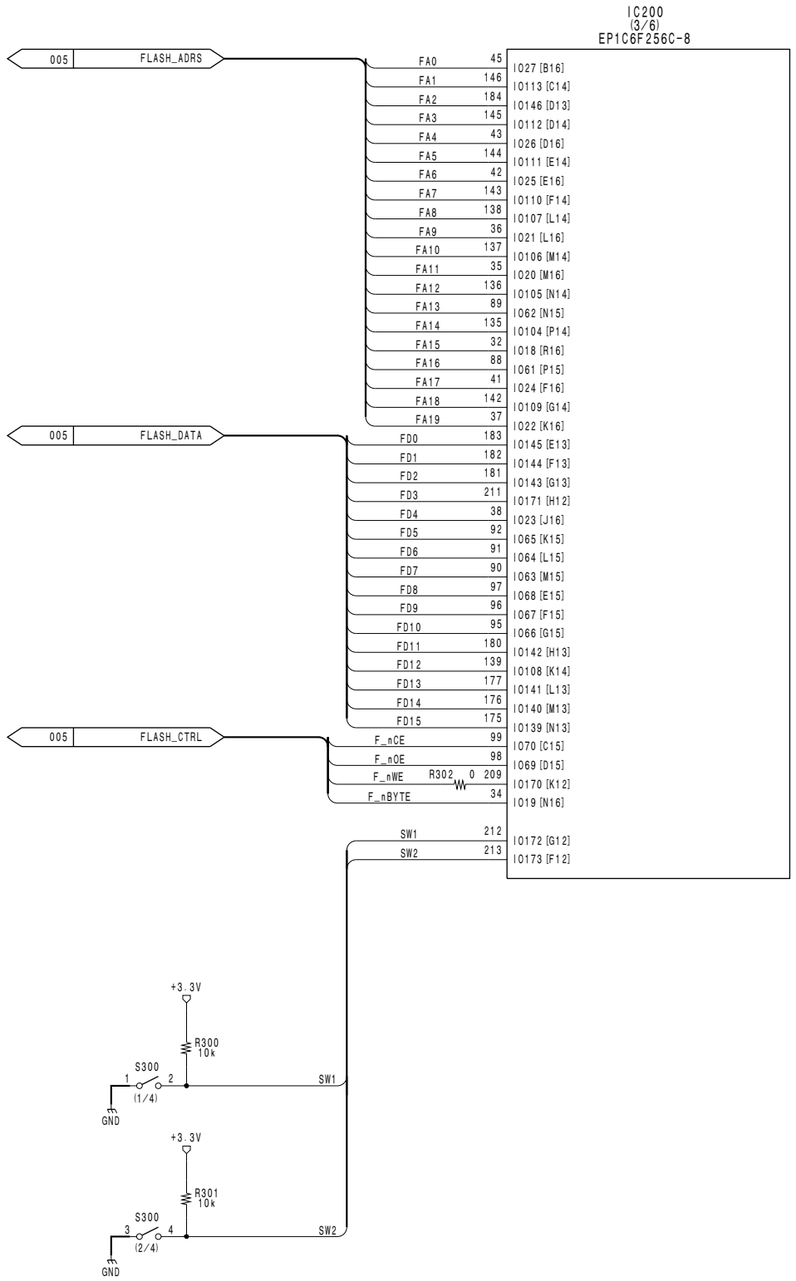


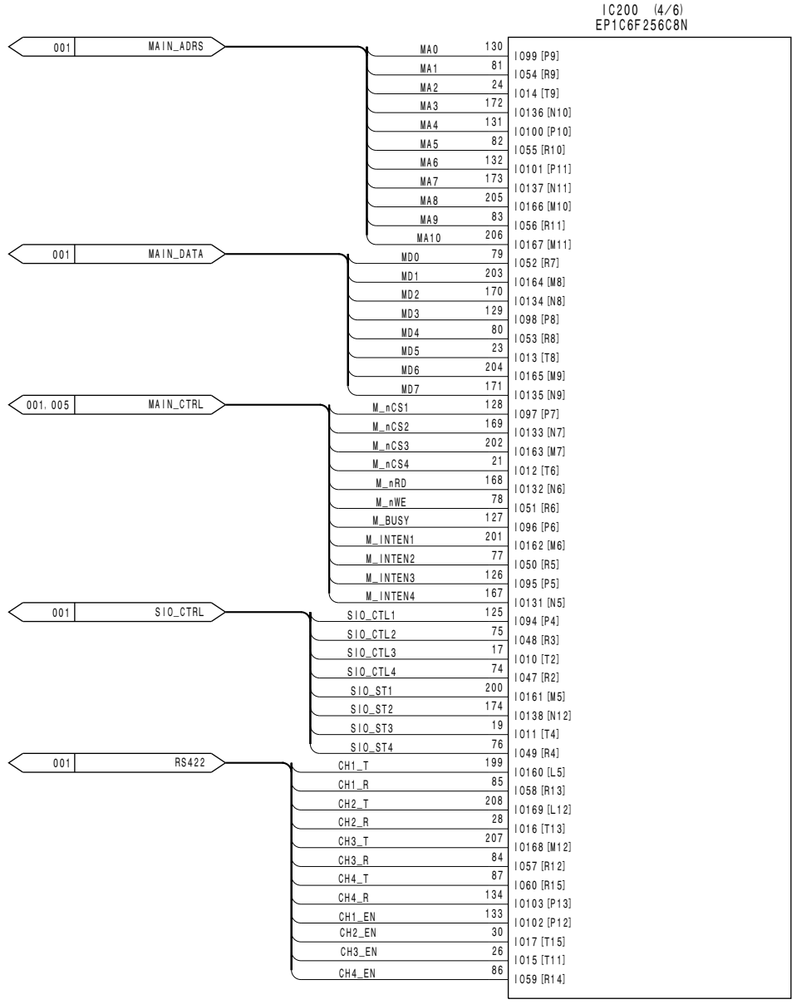



Serial Interface Board
SIO-26 (3/5)
BOARD NO. 1-862-225-11
SJX-283_SIO-26_001_3

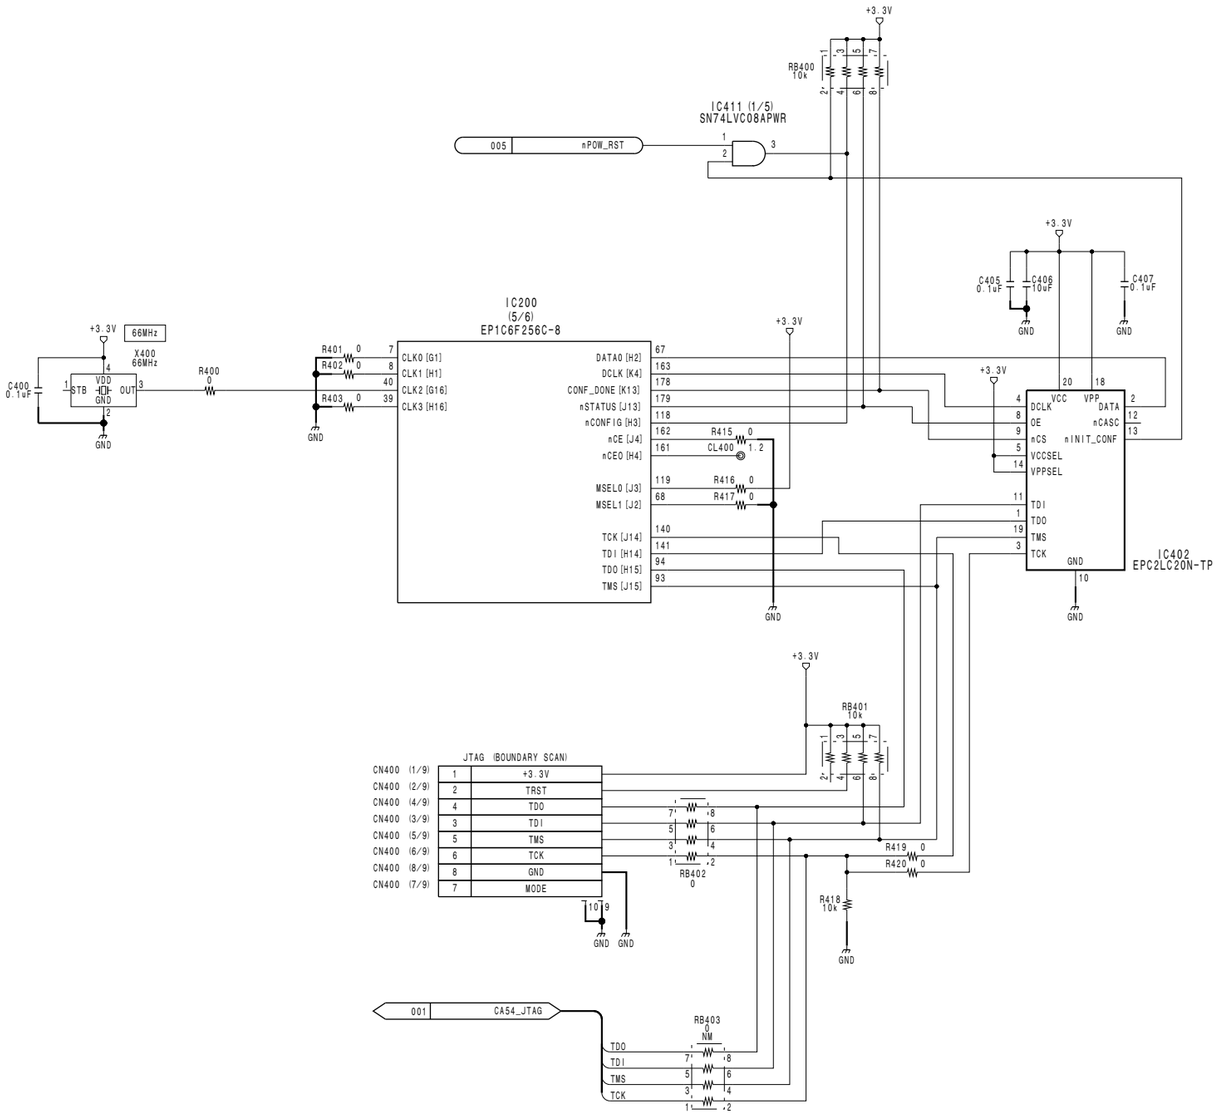


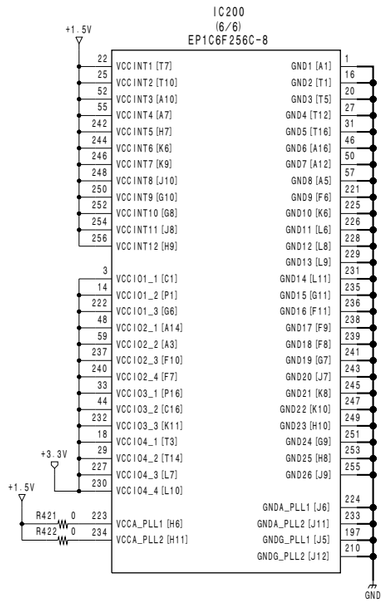




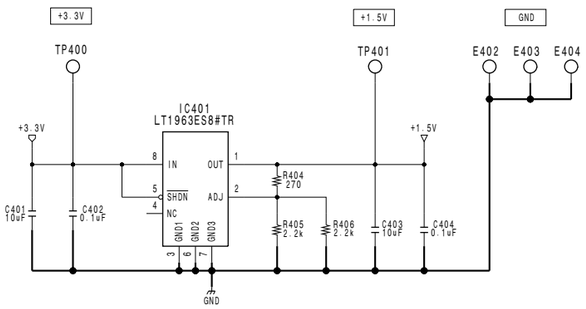





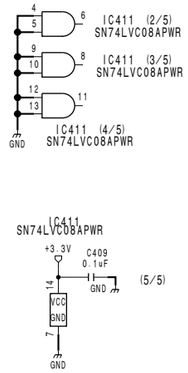



Serial Interface Board
SIO-26 (4/5)
BOARD NO. 1-862-225-11
SJX-283_SIO-26_001_4

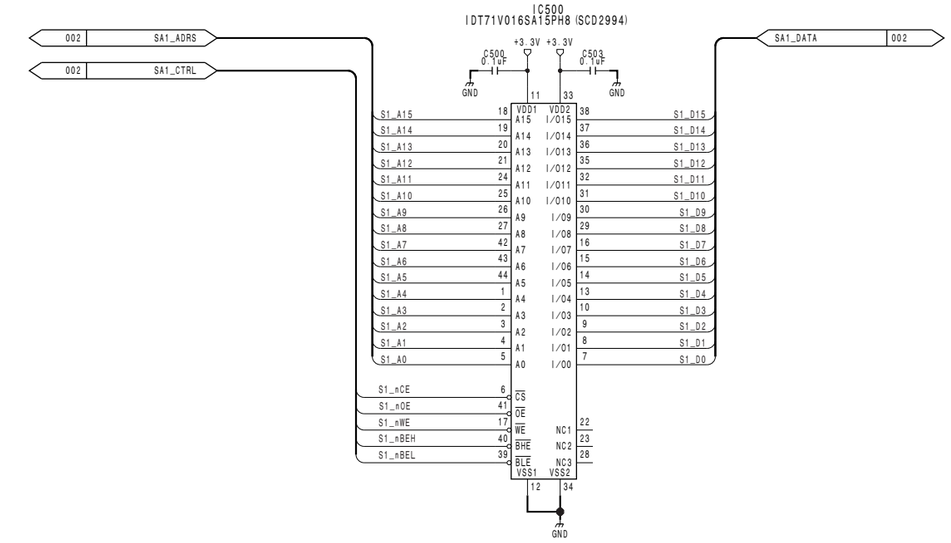

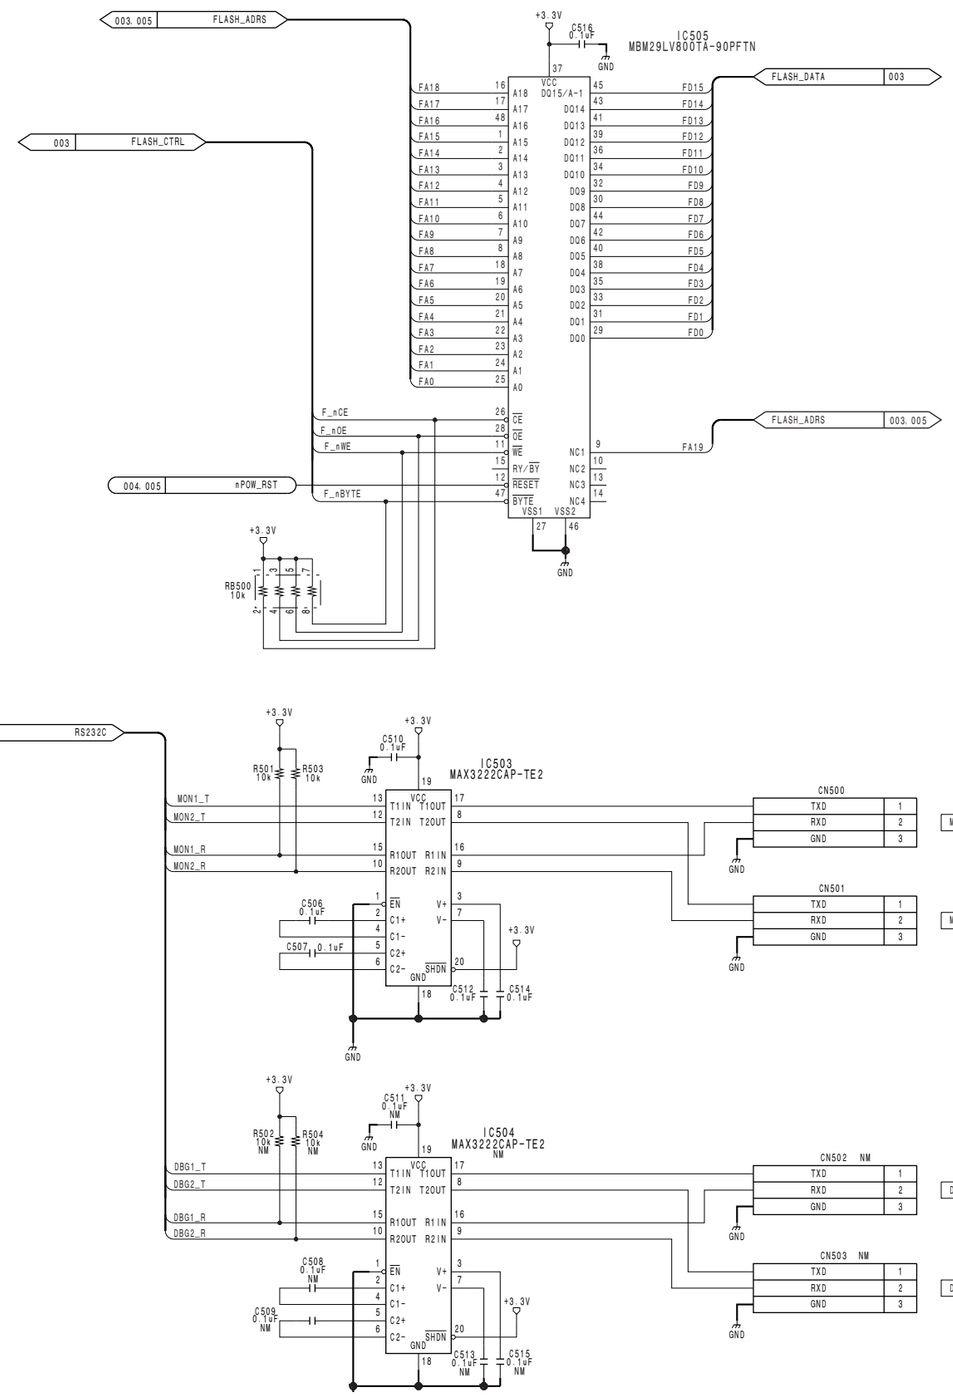

Serial Interface Board
SIO-26 (5/5)
BOARD NO. 1-862-225-11
SJX-283_SIO-26_001_5

XPT-29 (1/23)
SUFFIX: -11

CNT1

	a	b	c	d	e	FG
1	+12V	+12V		+12V	+12V	GND
2	+12V	+12V		+12V	+12V	GND
3	+12V	+12V		+12V	+12V	GND
4	+12V	+12V		+12V	+12V	GND
5	RESET_L	DC_ENBL	GND		FUSE+12V	GND
6	SLOT_ID7	SLOT_ID6		SLOT_ID5	SLOT_ID4	GND
7	SLOT_ID3	SLOT_ID2		SLOT_ID1	SLOT_ID0	GND
8			GND			GND
9			GND			GND
10			GND			GND
11			GND			GND
12						GND
13						GND
14						GND
15			GND			GND
16			GND			GND
17			GND			GND
18	PP_SR1KP	PP_SR1KN	GND	ME1_SR1KP	ME1_SR1KN	GND
19	PP_FL1VP	PP_FL1VN	GND	ME1_FL1VP	ME1_FL1VN	GND
20	PP_SR2KP	PP_SR2KN	GND	ME1_SR2KP	ME1_SR2KN	GND
21	PP_FL2VP	PP_FL2VN	GND	ME1_FL2VP	ME1_FL2VN	GND
22	PP_SR3KP	PP_SR3KN	GND	ME1_SR3KP	ME1_SR3KN	GND
23	PP_FL3VP	PP_FL3VN	GND	ME1_FL3VP	ME1_FL3VN	GND
24	PP_SR4KP	PP_SR4KN	GND	ME1_SR4KP	ME1_SR4KN	GND
25	PP_FL4VP	PP_FL4VN	GND	ME1_FL4VP	ME1_FL4VN	GND

CNV1

	a	b	c	d	e	FG
1	PP_PRC1VP	PP_PRC1VN	GND	ME1_PRC1VP	ME1_PRC1VN	GND
2	PP_PRC1KP	PP_PRC1KN	GND	ME1_PRC1KP	ME1_PRC1KN	GND
3	PP_BGCLVP	PP_BGCLVN	GND	ME1_BGCLVP	ME1_BGCLVN	GND
4	RSV_IN3P	RSV_IN3N	GND	RSV_IN4P	RSV_IN4N	GND
5	DIN26P	DIN26N	GND	DIN34P	DIN34N	GND
6	DIN25P	DIN25N	GND	DIN33P	DIN33N	GND
7	DIN24P	DIN24N	GND	DIN32P	DIN32N	GND
8	DIN23P	DIN23N	GND	DIN31P	DIN31N	GND
9	DIN22P	DIN22N	GND	DIN30P	DIN30N	GND
10	DIN21P	DIN21N	GND	DIN29P	DIN29N	GND
11	DIN20P	DIN20N	GND	DIN28P	DIN28N	GND
12	DIN19P	DIN19N	GND	DIN27P	DIN27N	GND
13	DIN18P	DIN18N	GND	RSV_IN2P	RSV_IN2N	GND
14	DIN09P	DIN09N	GND	DIN17P	DIN17N	GND
15	DIN08P	DIN08N	GND	DIN16P	DIN16N	GND
16	DIN07P	DIN07N	GND	DIN15P	DIN15N	GND
17	DIN06P	DIN06N	GND	DIN14P	DIN14N	GND
18	DIN05P	DIN05N	GND	DIN13P	DIN13N	GND
19	DIN04P	DIN04N	GND	DIN12P	DIN12N	GND
20	DIN03P	DIN03N	GND	DIN11P	DIN11N	GND
21	DIN02P	DIN02N	GND	DIN10P	DIN10N	GND
22	DIN01P	DIN01N	GND	RSV_IN1P	RSV_IN1N	GND

CNY1

	a	b	c	d	e	FG
1	DMEUTIL1VP	DMEUTIL1VN	GND	DMEUTIL2VP	DMEUTIL2VN	GND
2	DMEMON1P	DMEMON1N	GND	DMEMON2P	DMEMON2N	GND
3	MYIN2VP	MYIN2VN	GND	CCRIN1VP	CCRIN1VN	GND
4	MYIN3VP	MYIN3VN	GND	CCRIN2VP	CCRIN2VN	GND
5	MYIN4VP	MYIN4VN	GND	MYIN1VP	MYIN1VN	GND
6	CCROUT1VP	CCROUT1VN	GND	CCROUT2VP	CCROUT2VN	GND
7	MYOUT1VP	MYOUT1VN	GND	MYOUT2VP	MYOUT2VN	GND
8	MYOUT3VP	MYOUT3VN	GND	MYOUT4VP	MYOUT4VN	GND
9	MYOUT5VP	MYOUT5VN	GND	MYOUT6VP	MYOUT6VN	GND
10	MYOUT7VP	MYOUT7VN	GND	MYOUT8VP	MYOUT8VN	GND
11	ME1_BGAP	ME1_BGAN	GND	ME1_UTIL1P	ME1_UTIL1N	GND
12	ME1_BGBP	ME1_BGBN	GND	ME1_UTIL2P	ME1_UTIL2N	GND
13	ME1_OUT6VP	ME1_OUT6VN	GND	ME1_UTIL3P	ME1_UTIL3N	GND
14	ME1_OUT5VP	ME1_OUT5VN	GND	ME1_DMEVP	ME1_DMEVN	GND
15	PP_BGAP	PP_BGAN	GND	PP_OUT6VP	PP_OUT6VN	GND
16	PP_BGBP	PP_BGBN	GND	PP_OUT5VP	PP_OUT5VN	GND
17	PP_UTIL3P	PP_UTIL3N	GND	PP_UTIL1P	PP_UTIL1N	GND
18	PP_DMEVP	PP_DMEVN	GND	PP_UTIL2P	PP_UTIL2N	GND
19	PP_DMEKP	PP_DMEKN	GND	ME1_DMEKP	ME1_DMEKN	GND
20	PP_EXTDMEP	PP_EXTDMEN	GND	ME1_EXTDMEP	ME1_EXTDMEN	GND
21	PP_OUT2VP	PP_OUT2VN	GND	PP_OUT4VP	PP_OUT4VN	GND
22	ME1_OUT2VP	ME1_OUT2VN	GND	ME1_OUT4VP	ME1_OUT4VN	GND

CNW1


	a	b	c	d	e	FG
1			GND			GND
2			GND			GND
3			GND			GND
4			GND			GND
5			GND			GND
6			GND			GND
7	RSV_OUT3P	RSV_OUT3N	GND	RSV_OUT4P	RSV_OUT4N	GND
8	RSV_OUT1P	RSV_OUT1N	GND	RSV_OUT2P	RSV_OUT2N	GND
9	DOUT12P	DOUT12N	GND	DOUT24P	DOUT24N	GND
10	DOUT11P	DOUT11N	GND	DOUT23P	DOUT23N	GND
11	DOUT10P	DOUT10N	GND	DOUT22P	DOUT22N	GND
12						GND
13						GND
14						GND
15	DOUT09P	DOUT09N	GND	DOUT21P	DOUT21N	GND
16	DOUT08P	DOUT08N	GND	DOUT20P	DOUT20N	GND
17	DOUT07P	DOUT07N	GND	DOUT19P	DOUT19N	GND
18	DOUT06P	DOUT06N	GND	DOUT18P	DOUT18N	GND
19	DOUT05P	DOUT05N	GND	DOUT17P	DOUT17N	GND
20	DOUT04P	DOUT04N	GND	DOUT16P	DOUT16N	GND
21	DOUT03P	DOUT03N	GND	DOUT15P	DOUT15N	GND
22	DOUT02P	DOUT02N	GND	DOUT14P	DOUT14N	GND
23	DOUT01P	DOUT01N	GND	DOUT13P	DOUT13N	GND
24			GND			GND
25			GND			GND

CNZ1

	a	b	c	d	e	FG
1	PP_OUT1VP	PP_OUT1VN	GND	PP_OUT3VP	PP_OUT3VN	GND
2	ME1_OUT1VP	ME1_OUT1VN	GND	ME1_OUT3VP	ME1_OUT3VN	GND
3	PBUSOUT01	PBUSOUT02	GND	PBUSOUT03	PBUSOUT04	GND
4	PBUSOUT05	PBUSOUT06	GND	PBUSOUT07	PBUSOUT08	GND
5	PBUSOUT09	PBUSOUT10	GND	PBUSOUT11	PBUSOUT12	GND
6	PBUSOUT13	PBUSOUT14	GND	PBUSOUT15	PBUSOUT16	GND
7	PBUSOUT17	PBUSOUT18	GND	PBUSOUT19	PBUSOUT20	GND
8	PBUSOUT21	PBUSOUT22	GND	PBUSOUT23	PBUSOUT24	GND
9	PBUSOUT25	PBUSOUT26	GND	PBUSOUT27	PBUSOUT28	GND
10	PBUSOUT29	PBUSOUT30	GND	PBUSOUT31	PBUSOUT32	GND
11	PBUSOUT33	PBUSOUT34	GND	PBUSOUT35	PBUSOUT36	GND
12						GND
13						GND
14						GND
15	PBUSOUT37	PBUSOUT38	GND	PBUSOUT39	PBUSOUT40	GND
16	PBUSOUT41	PBUSOUT42	GND	PBUSOUT43	PBUSOUT44	GND
17	PBUSOUT45	(PBUSOUT46)	GND	(PBUSOUT47)	PBUSOUT48	GND
18	(PBUSOUT49)	(PBUSOUT50)	GND	PBUSOUT51	PBUSOUT52	GND
19	(PBUSOUT53)	(PBUSOUT54)	GND	(PBUSOUT55)	(PBUSOUT56)	GND
20	PBUSOUT57	PBUSOUT58	GND	PBUSOUT59	PBUSOUT60	GND
21			GND			GND
22			GND			GND
23			GND	HFCK_P	HFCK_N	GND
24	HD_P	HD_N	GND	CKX_P	CKX_N	GND
25	FLOE_P	FLOE_N	GND	VD_P	VD_N	GND


Cross Point Board
XPT-29 (1/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_1

XPT-29 (2/23)
SUFFIX: -11

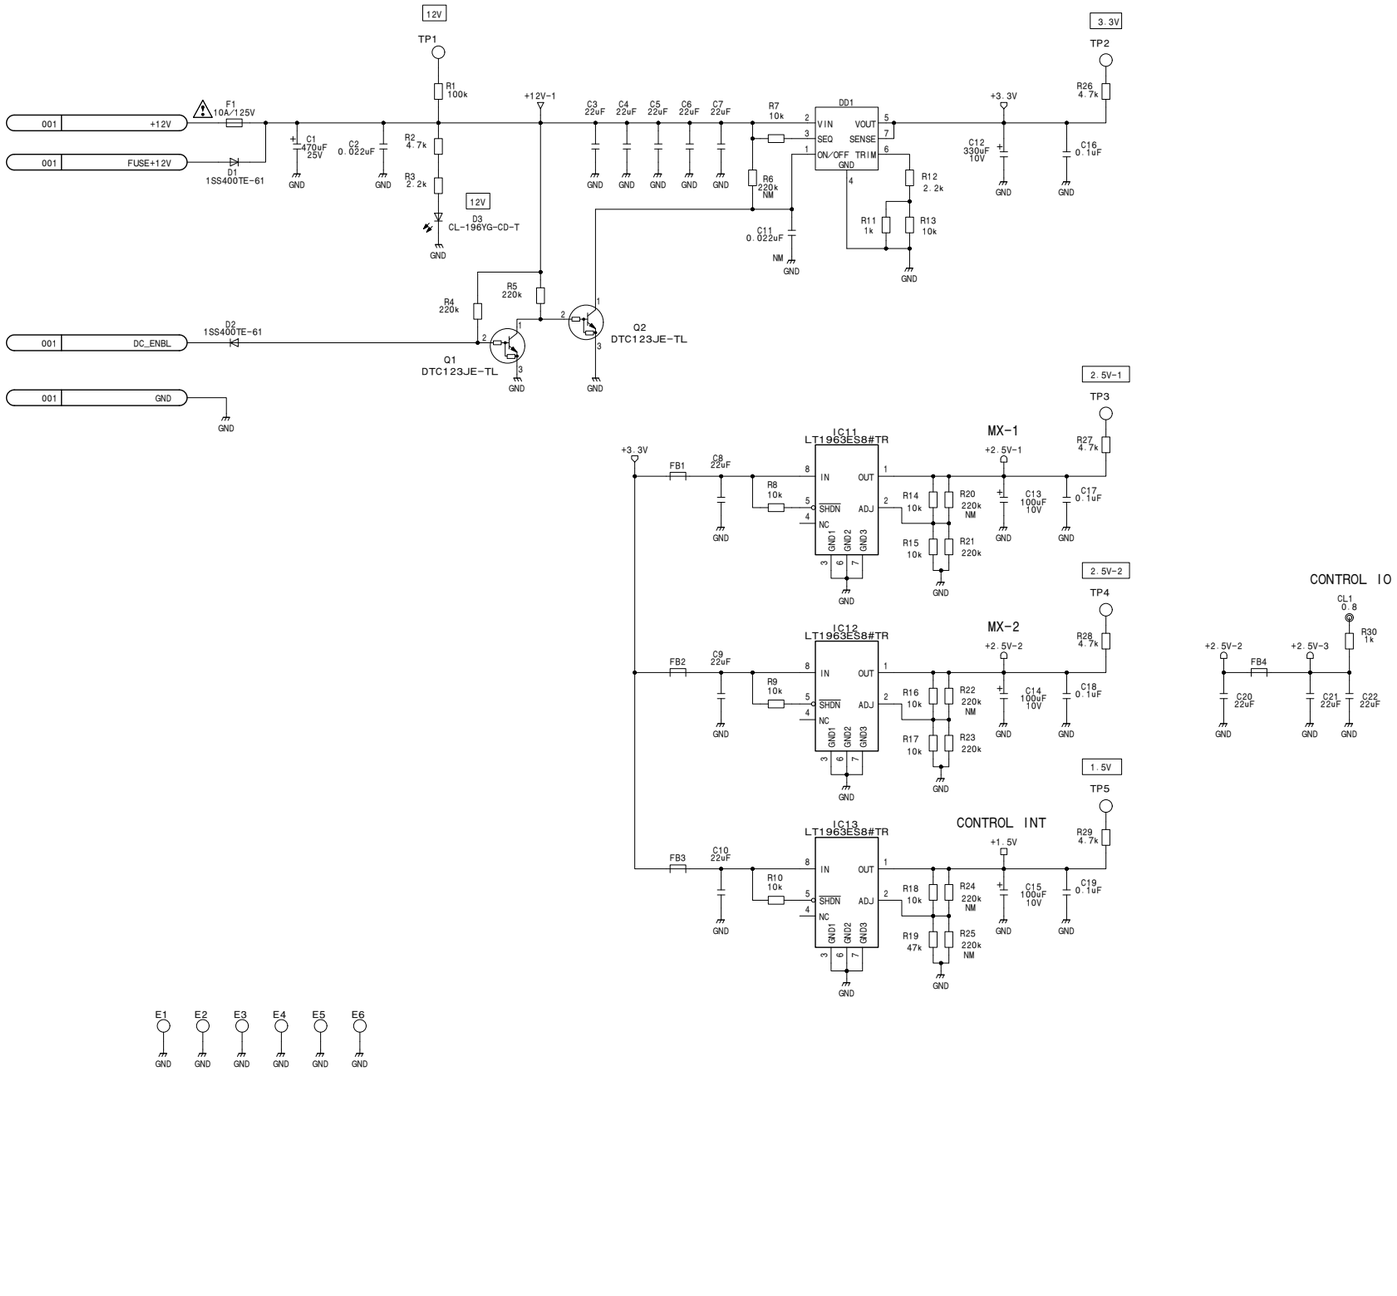

Cross Point Board
XPT-29 (2/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_2


XPT-29 (3/23)
SUFFIX: -11

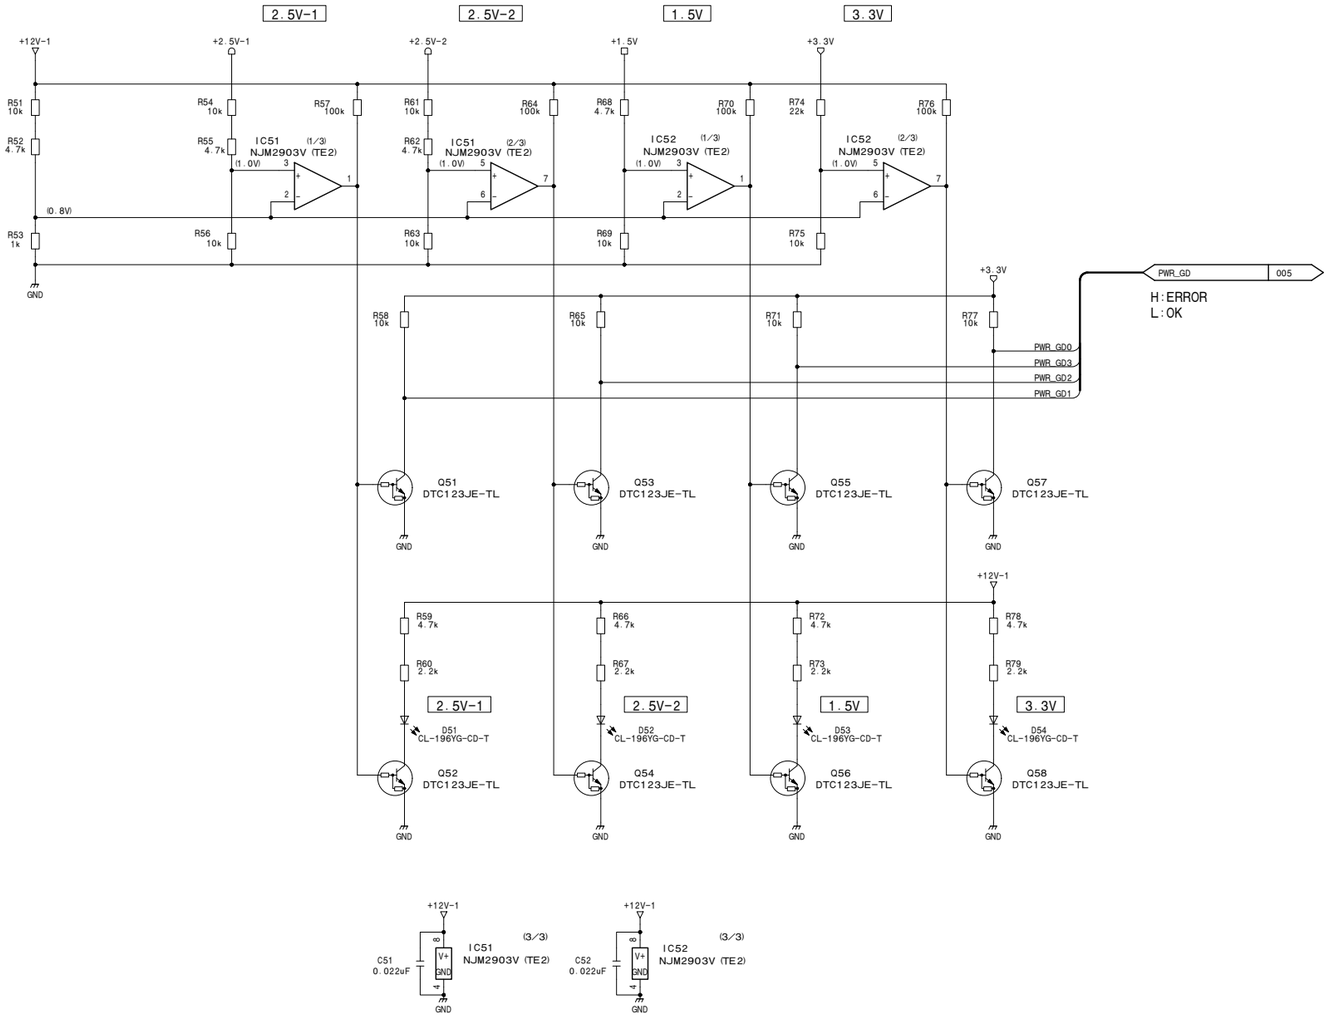

Cross Point Board
XPT-29 (3/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_3

4-283

XPT-29 (4/23)
SUFFIX: -11

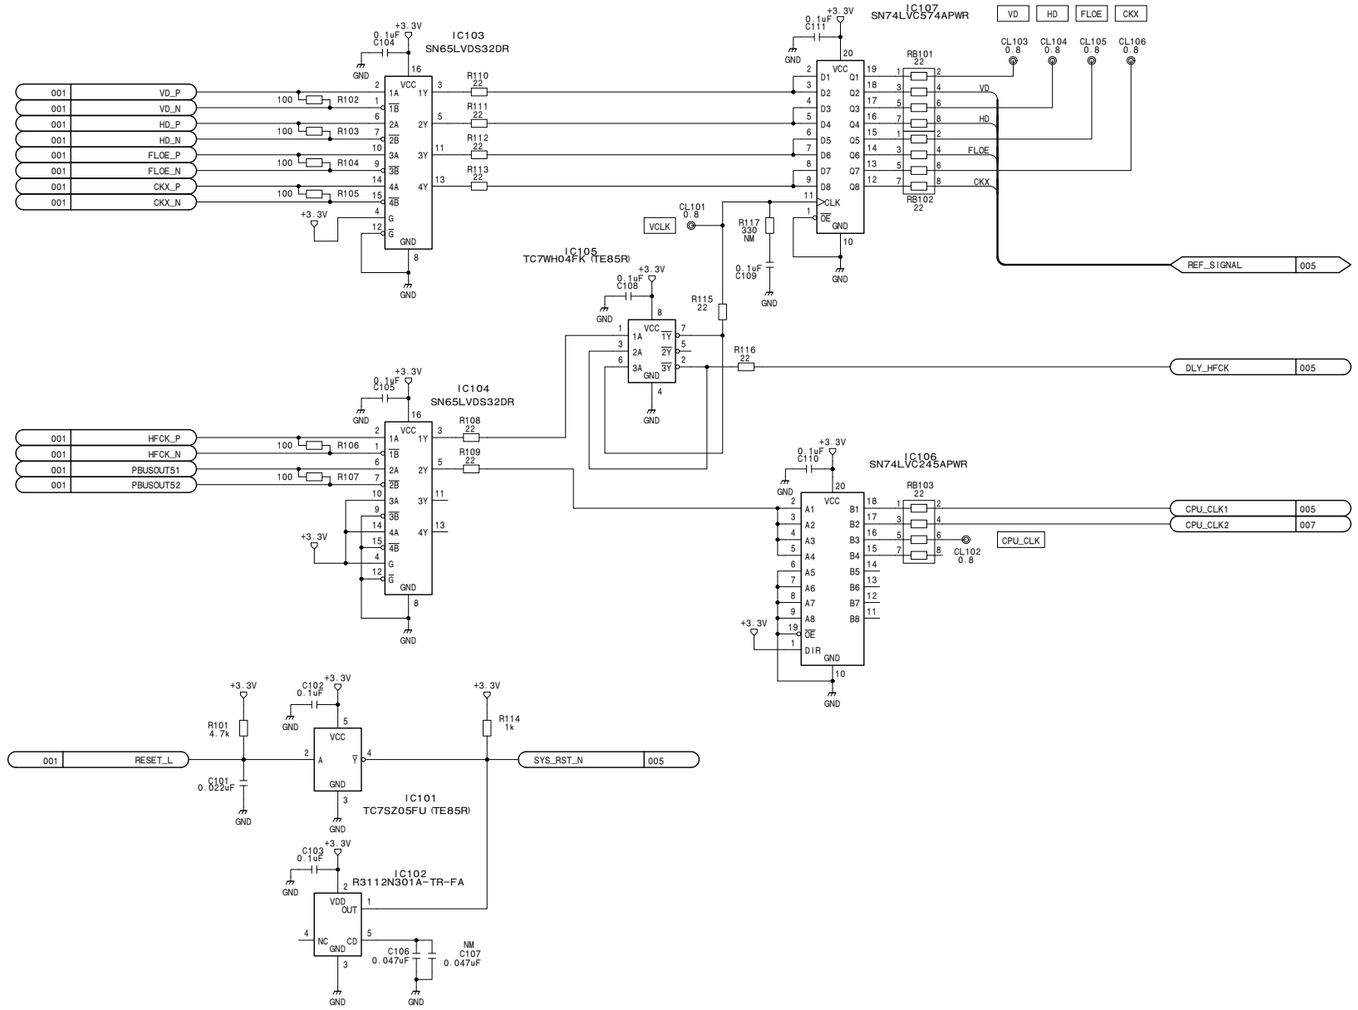


4-284

Cross Point Board
XPT-29 (4/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_4


MVS-6000 MM

XPT-29 (5/23)
SUFFIX: -11


CPU I/F

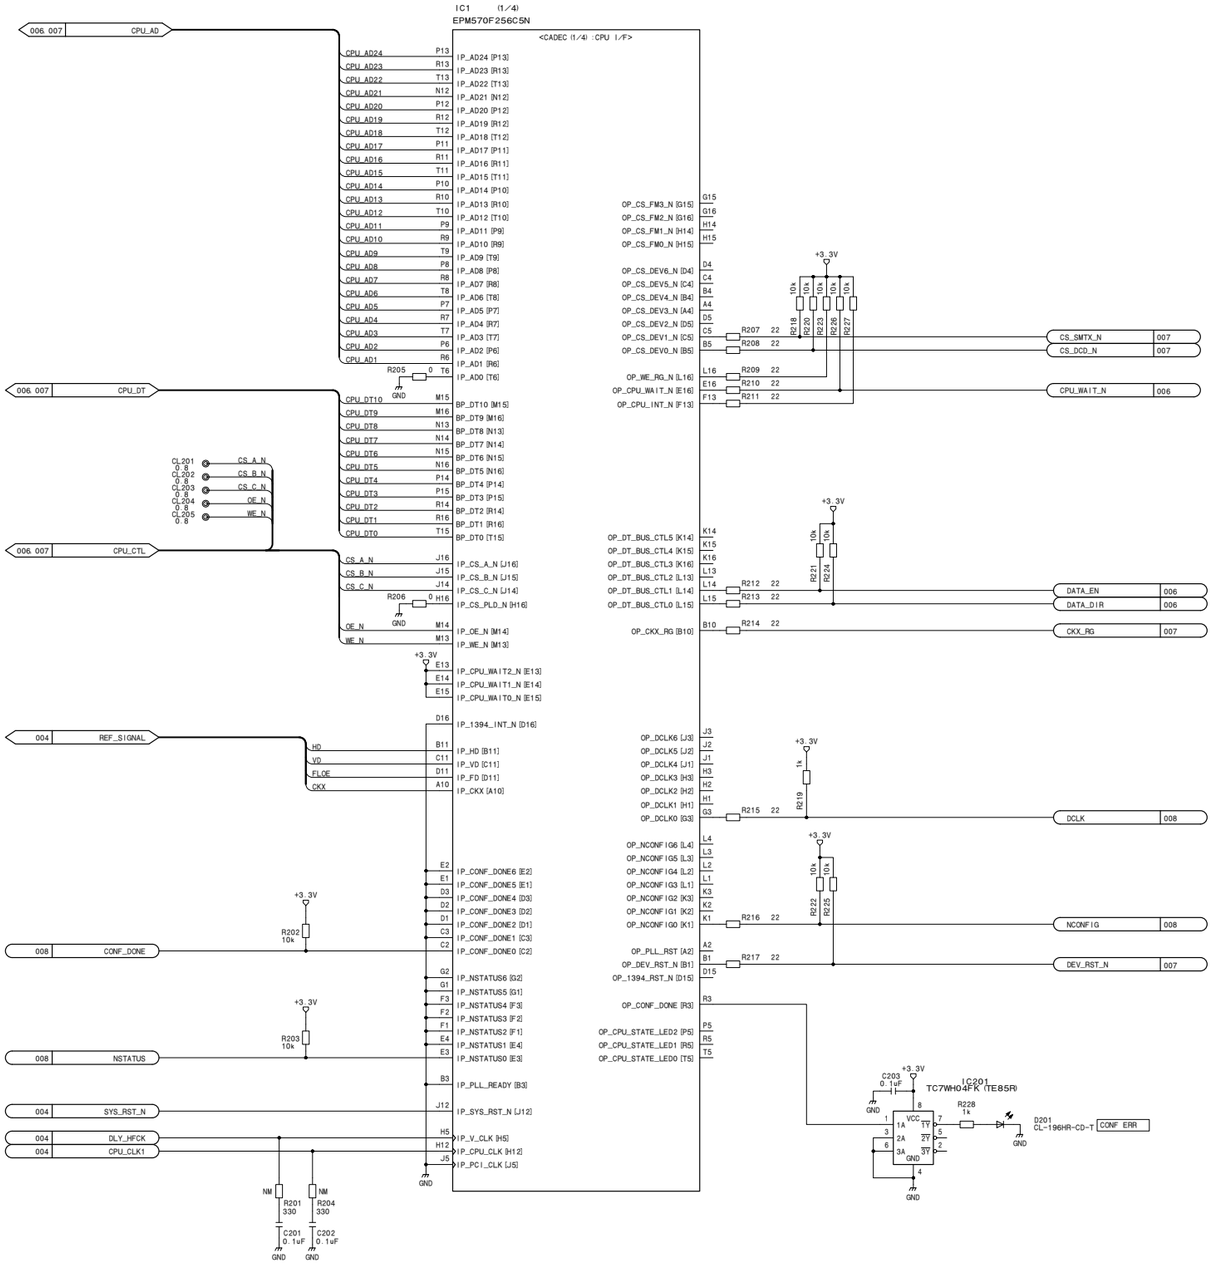

DEV CTL

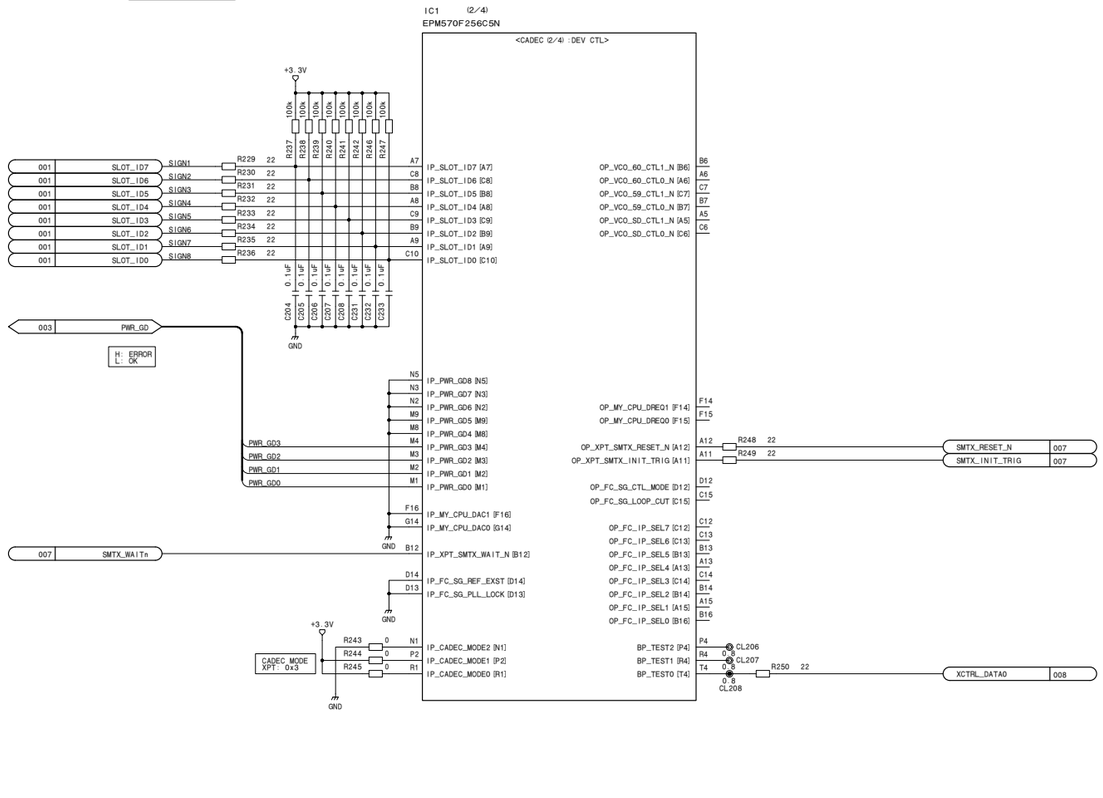



VCC&GND

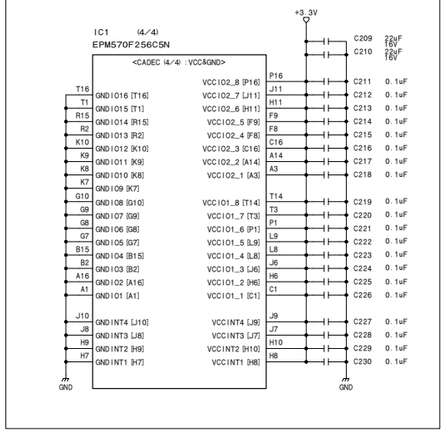



Cross Point Board
XPT-29 (5/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_5

XPT-29 (6/23)
SUFFIX: -11

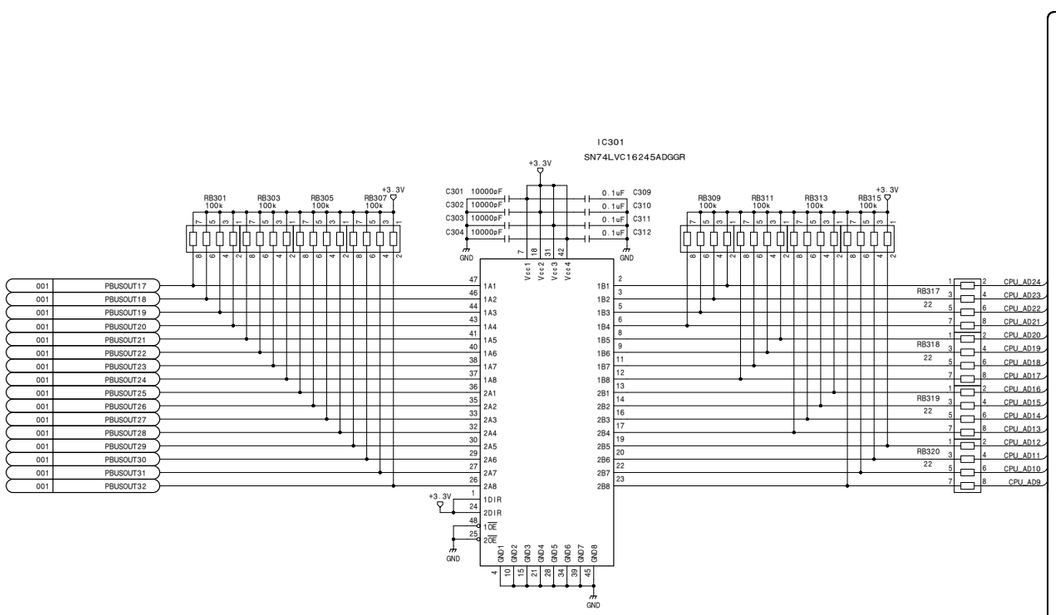

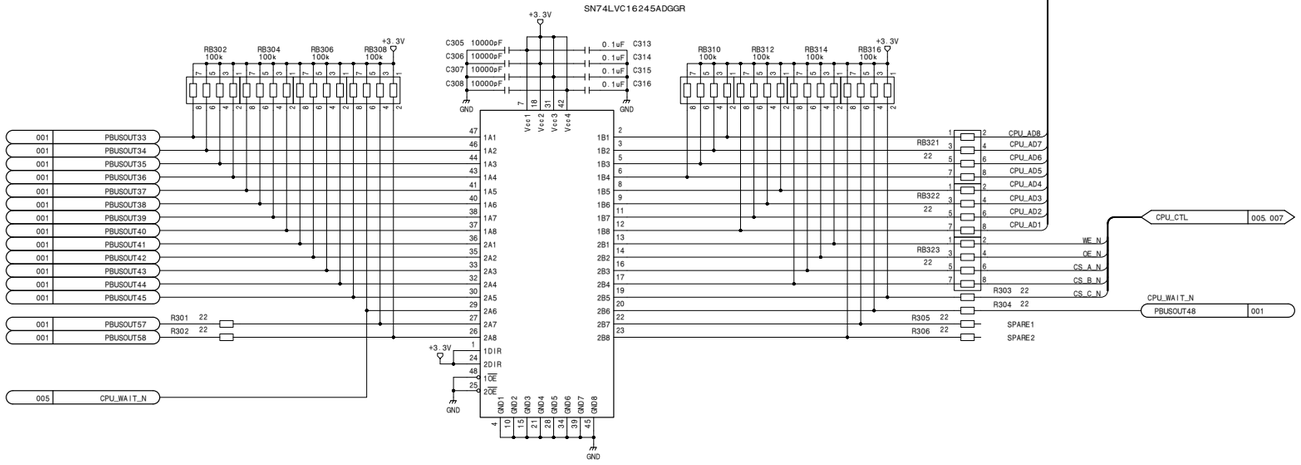

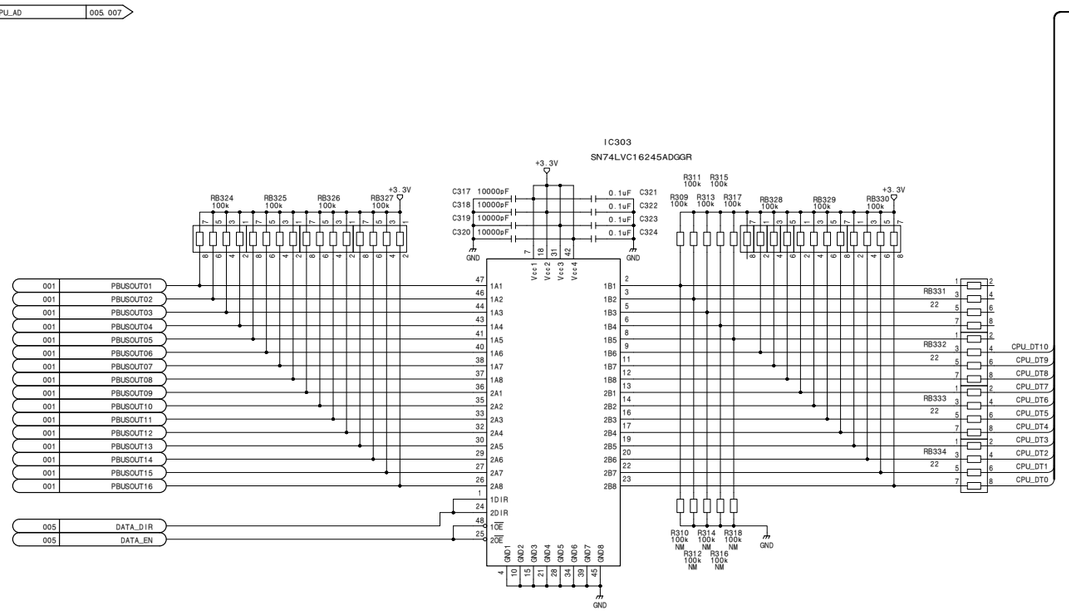


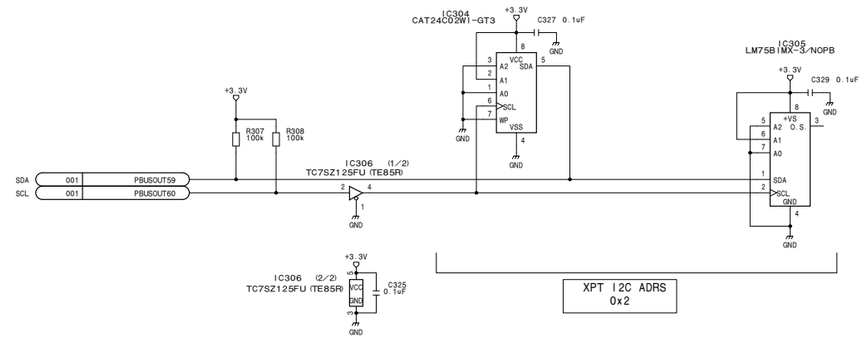



Cross Point Board
XPT-29 (6/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_6

4-286

MVS-6000 MM

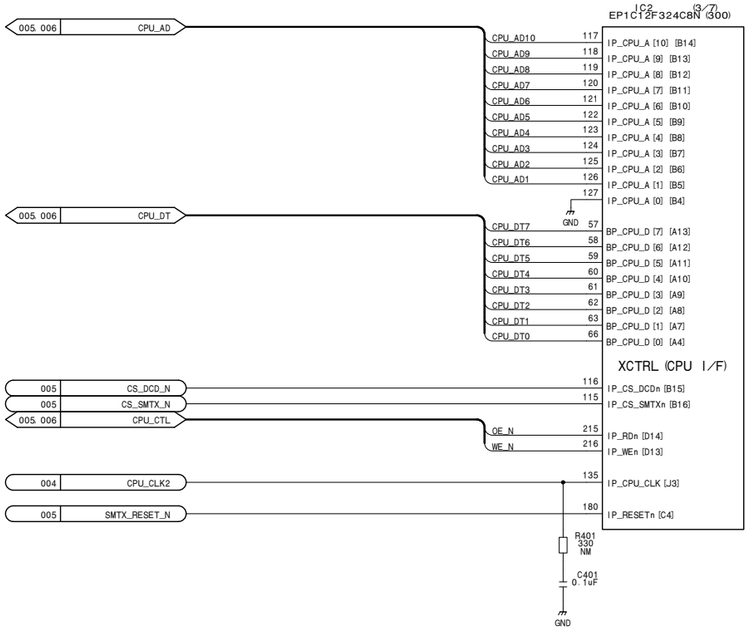

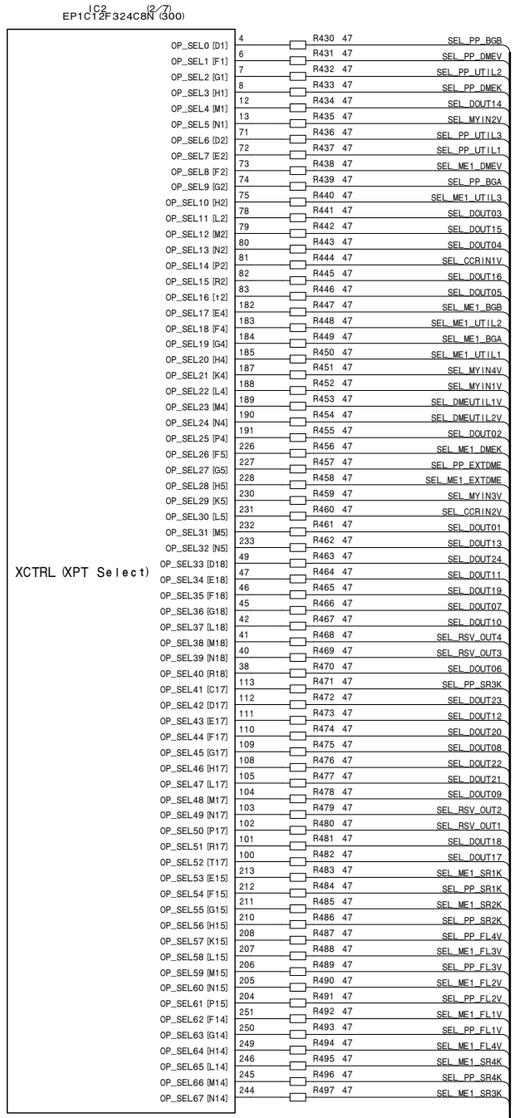


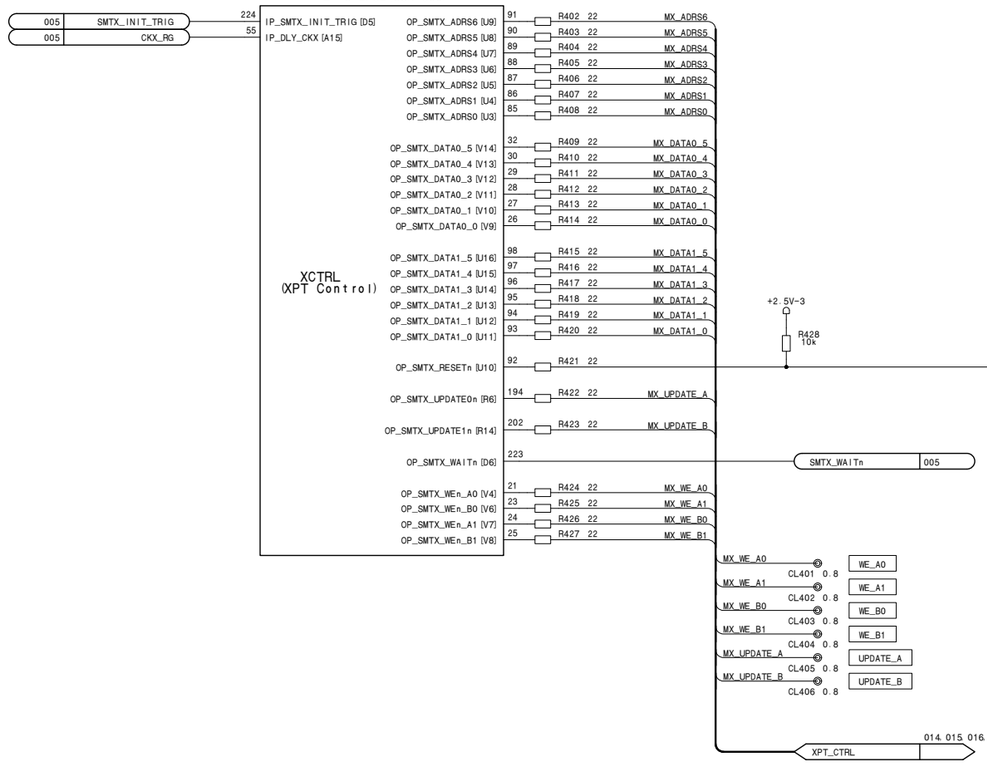




Cross Point Board
XPT-29 (7/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_7

XPT-29 (8/23)
SUFFIX: -11

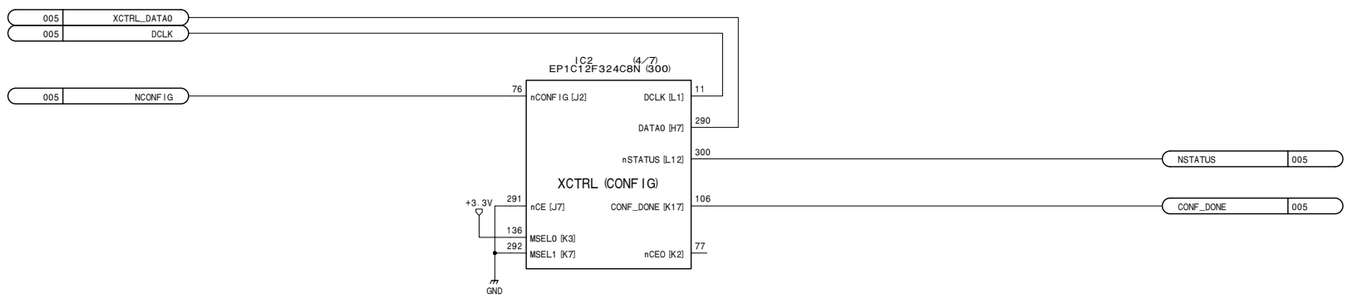

JTAG_CHAIN \ Ref	R516	R517	R518
CADEC (IC1)	M't	N.Mt	N.Mt
FULL	N.Mt	M't	M't

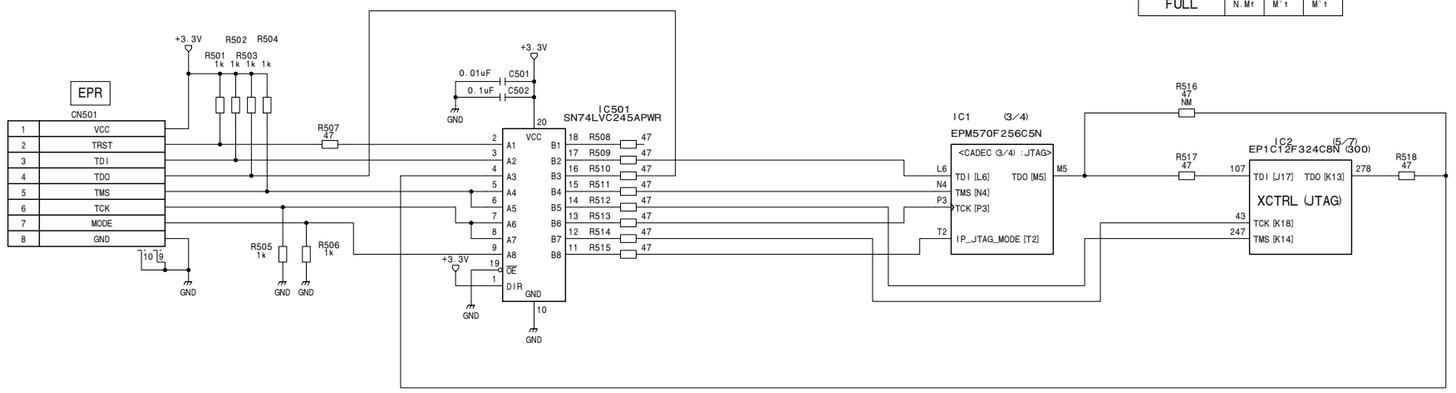



Cross Point Board
XPT-29 (8/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_8

4-288

MVS-6000 MM

XPT-29 (9/23)
SUFFIX: -11

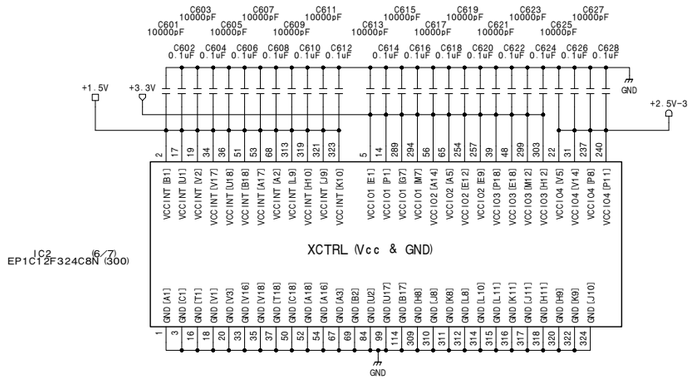

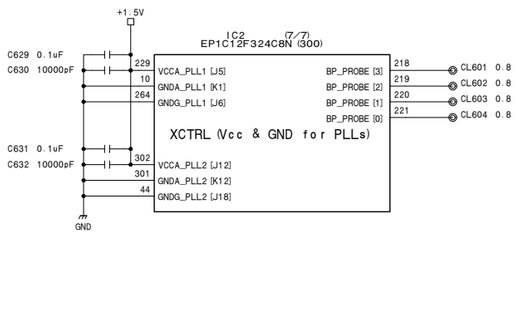

Cross Point Board
XPT-29 (9/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_9

XPT-29 (10/23)
SUFFIX: -11

SDI_IN_A 011. 012. 013. 014. 015
SDI_IN_B 011. 012. 013. 016. 017

IC1001 MC100LVEL11DTR2
001 PP_PRC1VN
001 PP_PRC1VP
R1001 47
R1007 47
C1001 0.1uF
R1013 330
R1019 330
R1025 330
R1031 330
R1037 10 PP_PRC1VBN
R1038 10 PP_PRC1VBP
R1039 10 PP_PRC1VAN
R1040 10 PP_PRC1VAP

IC1002 MC100LVEL11DTR2
001 ME1_PRC1VP
001 ME1_PRC1VN
R1002 47
R1008 47
C1002 0.1uF
R1014 330
R1020 330
R1026 330
R1032 330
R1041 10 ME1_PRC1VBP
R1042 10 ME1_PRC1VBN
R1043 10 ME1_PRC1VAP
R1044 10 ME1_PRC1VAN

IC1003 MC100LVEL11DTR2
001 PP_PRC1KN
001 PP_PRC1KP
R1003 47
R1009 47
C1003 0.1uF
R1015 330
R1021 330
R1027 330
R1033 330
R1045 10 PP_PRC1KBN
R1046 10 PP_PRC1KBP
R1047 10 PP_PRC1KAN
R1048 10 PP_PRC1KAP

IC1004 MC100LVEL11DTR2
001 ME1_PRC1KP
001 ME1_PRC1KN
R1004 47
R1010 47
C1004 0.1uF
R1016 330
R1022 330
R1028 330
R1034 330
R1049 10 ME1_PRC1KBP
R1050 10 ME1_PRC1KBN
R1051 10 ME1_PRC1KAP
R1052 10 ME1_PRC1KAN

IC1005 MC100LVEL11DTR2
001 PP_BGCLVN
001 PP_BGCLVP
R1005 47
R1011 47
C1005 0.1uF
R1017 330
R1023 330
R1029 330
R1035 330
R1053 10 PP_BGCLVBN
R1054 10 PP_BGCLVBP
R1055 10 PP_BGCLVAN
R1056 10 PP_BGCLVAP

IC1006 MC100LVEL11DTR2
001 ME1_BGCLVP
001 ME1_BGCLVN
R1006 47
R1012 47
C1006 0.1uF
R1018 330
R1024 330
R1030 330
R1036 330
R1057 10 ME1_BGCLVBP
R1058 10 ME1_BGCLVBN
R1059 10 ME1_BGCLVAP
R1060 10 ME1_BGCLVAN

IC1101 MC100LVEL11DTR2
001 RSV_IN3N
001 RSV_IN3P
R1101 47
R1107 47
C1101 0.1uF
R1113 330
R1119 330
R1125 330
R1131 330
R1137 10 RSV_IN3BN
R1138 10 RSV_IN3BP
R1139 10 RSV_IN3AN
R1140 10 RSV_IN3AP

IC1102 MC100LVEL11DTR2
001 RSV_IN4P
001 RSV_IN4N
R1102 47
R1108 47
C1102 0.1uF
R1114 330
R1120 330
R1126 330
R1132 330
R1141 10 RSV_IN4BP
R1142 10 RSV_IN4BN
R1143 10 RSV_IN4AP
R1144 10 RSV_IN4AN

IC1103 MC100LVEL11DTR2
001 DIN26N
001 DIN26P
R1103 47
R1109 47
C1103 0.1uF
R1115 330
R1121 330
R1127 330
R1133 330
R1145 10 DIN26BN
R1146 10 DIN26BP
R1147 10 DIN26AN
R1148 10 DIN26AP

IC1104 MC100LVEL11DTR2
001 DIN34P
001 DIN34N
R1104 47
R1110 47
C1104 0.1uF
R1116 330
R1122 330
R1128 330
R1134 330
R1149 10 DIN34BP
R1150 10 DIN34BN
R1151 10 DIN34AP
R1152 10 DIN34AN

IC1105 MC100LVEL11DTR2
001 DIN25N
001 DIN25P
R1105 47
R1111 47
C1105 0.1uF
R1117 330
R1123 330
R1129 330
R1135 330
R1153 10 DIN25BN
R1154 10 DIN25BP
R1155 10 DIN25AN
R1156 10 DIN25AP

IC1106 MC100LVEL11DTR2
001 DIN33P
001 DIN33N
R1106 47
R1112 47
C1106 0.1uF
R1118 330
R1124 330
R1130 330
R1136 330
R1157 10 DIN33BP
R1158 10 DIN33BN
R1159 10 DIN33AP
R1160 10 DIN33AN

IC1201 MC100LVEL11DTR2
001 DIN24N
001 DIN24P
R1201 47
R1207 47
C1201 0.1uF
R1213 330
R1219 330
R1225 330
R1231 330
R1237 10 DIN24AN
R1238 10 DIN24AP
R1239 10 DIN24BN
R1240 10 DIN24BP

IC1202 MC100LVEL11DTR2
001 DIN32P
001 DIN32N
R1202 47
R1208 47
C1202 0.1uF
R1214 330
R1220 330
R1226 330
R1232 330
R1241 10 DIN32AP
R1242 10 DIN32AN
R1243 10 DIN32BP
R1244 10 DIN32BN

IC1203 MC100LVEL11DTR2
001 DIN23N
001 DIN23P
R1203 47
R1209 47
C1203 0.1uF
R1215 330
R1221 330
R1227 330
R1233 330
R1245 10 DIN23AN
R1246 10 DIN23AP
R1247 10 DIN23BN
R1248 10 DIN23BP

IC1204 MC100LVEL11DTR2
001 DIN31P
001 DIN31N
R1204 47
R1210 47
C1204 0.1uF
R1216 330
R1222 330
R1228 330
R1234 330
R1249 10 DIN31AP
R1250 10 DIN31AN
R1251 10 DIN31BP
R1252 10 DIN31BN

IC1205 MC100LVEL11DTR2
001 DIN22N
001 DIN22P
R1205 47
R1211 47
C1205 0.1uF
R1217 330
R1223 330
R1229 330
R1235 330
R1253 10 DIN22AN
R1254 10 DIN22AP
R1255 10 DIN22BN
R1256 10 DIN22BP


IC1206 MC100LVEL11DTR2
001 DIN30P
001 DIN30N
R1206 47
R1212 47
C1206 0.1uF
R1218 330
R1224 330
R1230 330
R1236 330
R1257 10 DIN30AP
R1258 10 DIN30AN
R1259 10 DIN30BP
R1260 10 DIN30BN

Cross Point Board
XPT-29 (10/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_10

4-290

MVS-6000 MM

XPT-29 (11/23)
SUFFIX: -11

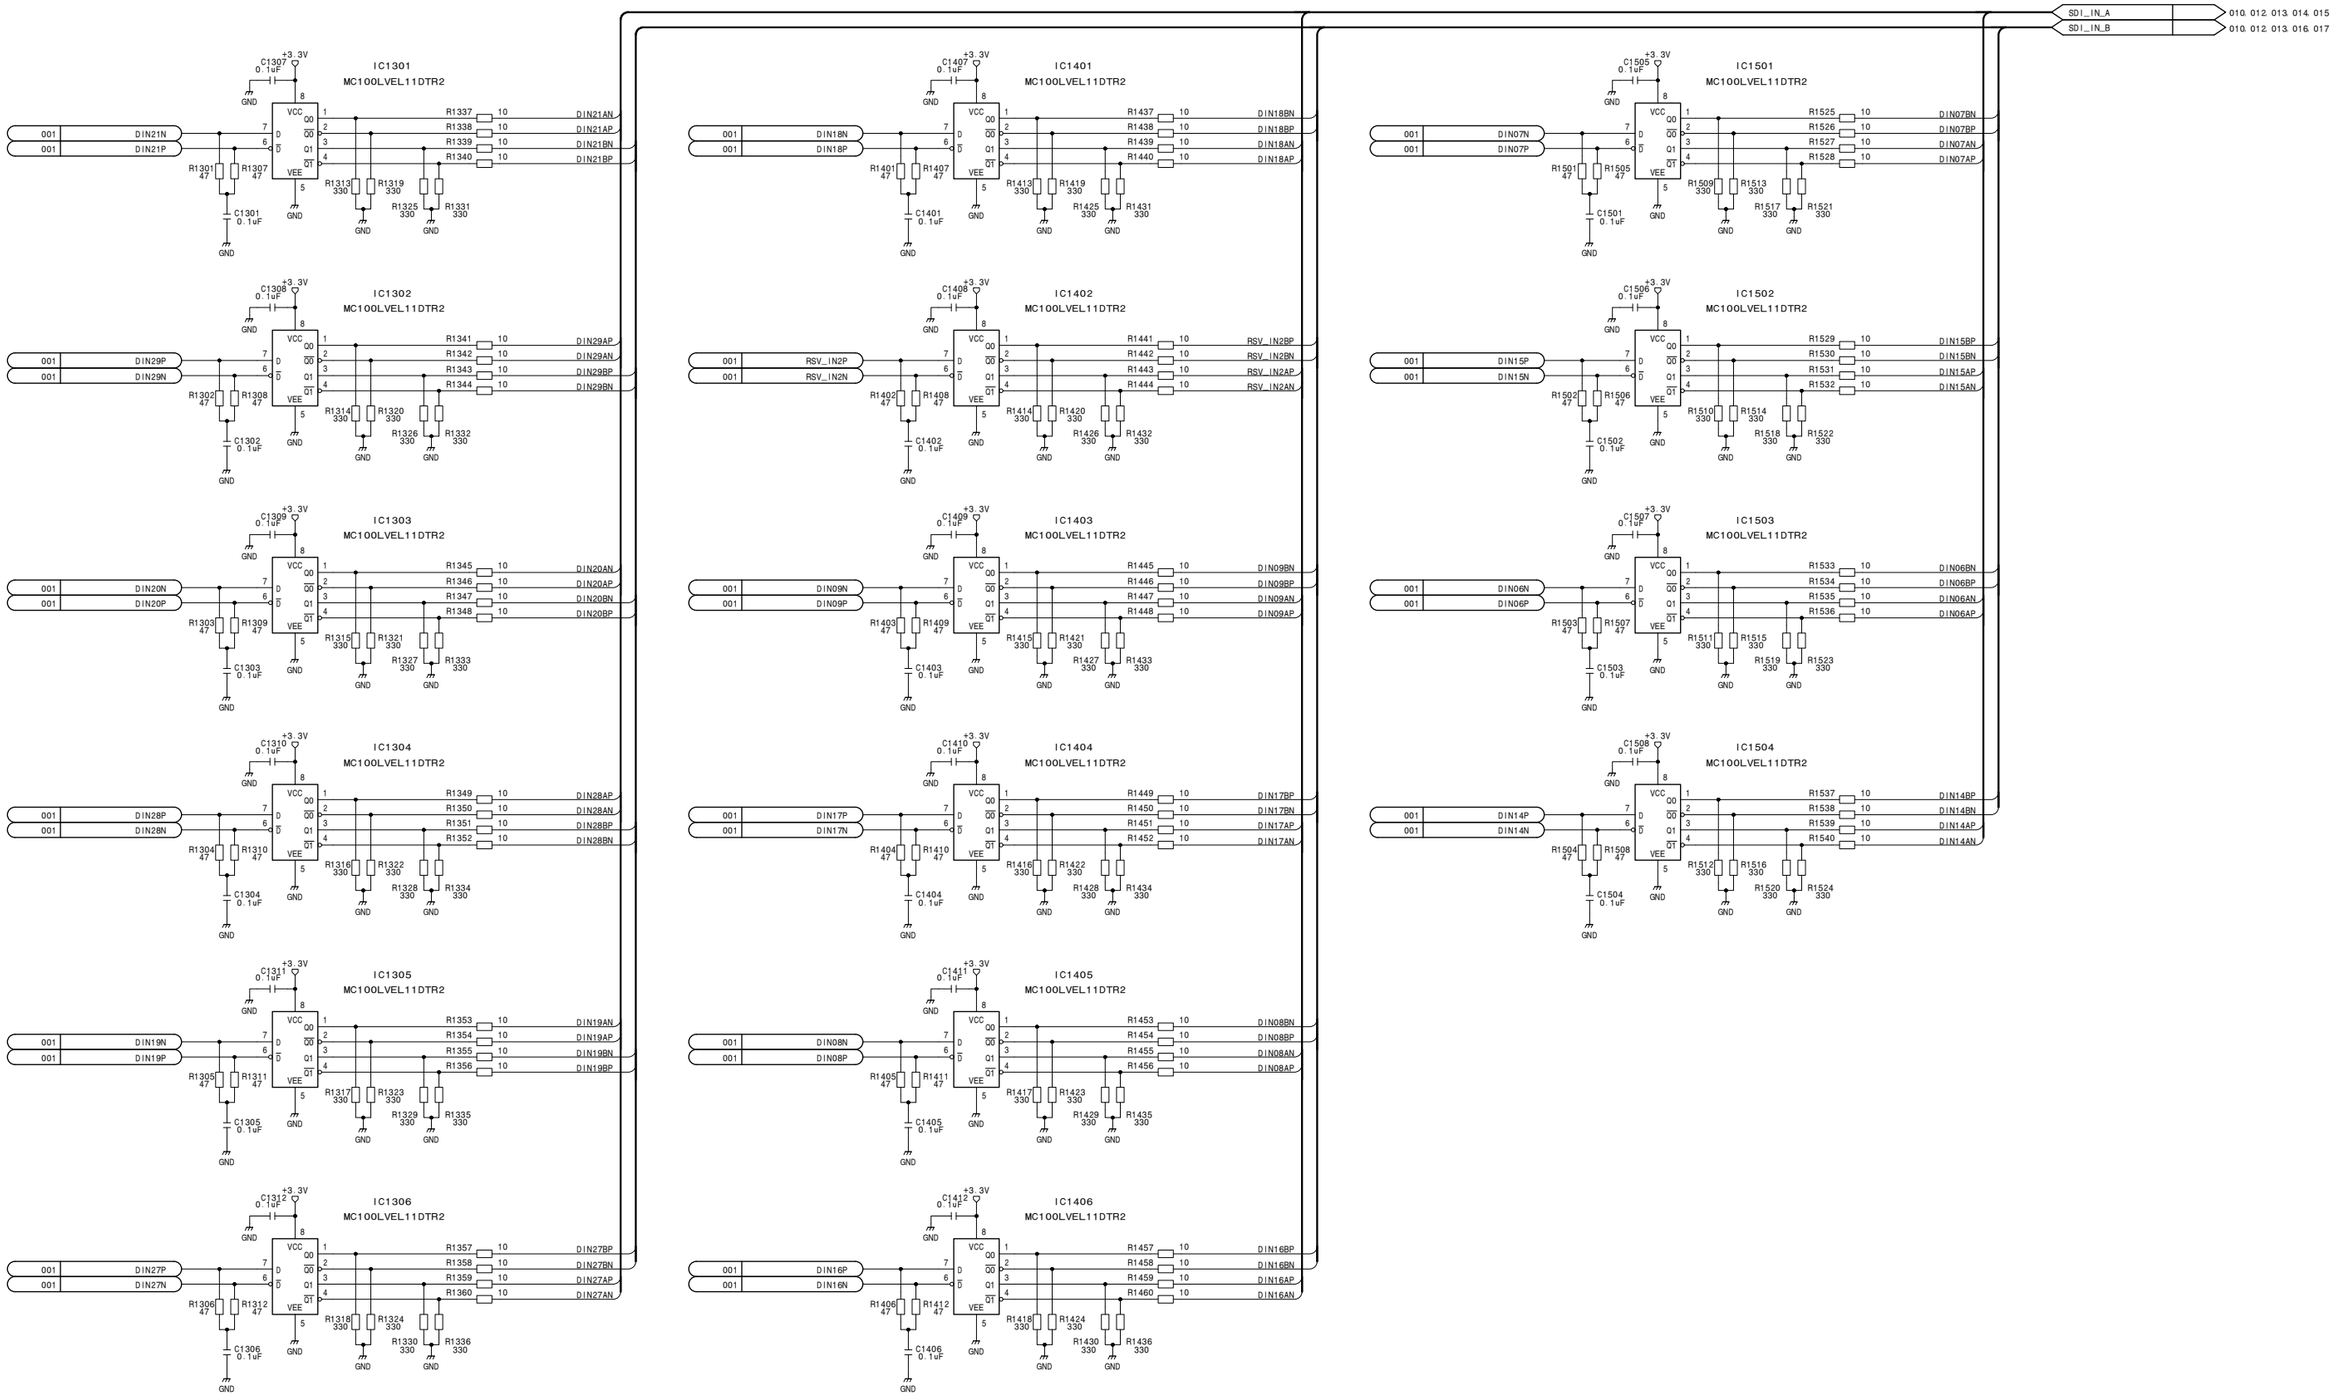

Cross Point Board
XPT-29 (11/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_11

XPT-29 (12/23)
SUFFIX: -11

SDI_IN_A 010, 011, 013, 014, 015
SDI_IN_B 010, 011, 013, 016, 017

IC2001 MC100LVEL11DTR2
001 DIN05N
001 DIN05P
R2001 47
R2007 47
C2001 0.1uF
R2013 330
R2019 330
R2025 330
R2031 330
R2037 10
R2038 10
R2039 10
R2040 10
DIN05BN
DIN05BP
DIN05AN
DIN05AP

IC2002 MC100LVEL11DTR2
001 DIN13P
001 DIN13N
R2002 47
R2008 47
C2002 0.1uF
R2014 330
R2020 330
R2026 330
R2032 330
R2041 10
R2042 10
R2043 10
R2044 10
DIN13BP
DIN13BN
DIN13AP
DIN13AN

IC2003 MC100LVEL11DTR2
001 DIN04N
001 DIN04P
R2003 47
R2009 47
C2003 0.1uF
R2015 330
R2021 330
R2027 330
R2033 330
R2045 10
R2046 10
R2047 10
R2048 10
DIN04BN
DIN04BP
DIN04AN
DIN04AP

IC2004 MC100LVEL11DTR2
001 DIN12P
001 DIN12N
R2004 47
R2010 47
C2004 0.1uF
R2016 330
R2022 330
R2028 330
R2034 330
R2049 10
R2050 10
R2051 10
R2052 10
DIN12BP
DIN12BN
DIN12AP
DIN12AN

IC2005 MC100LVEL11DTR2
001 DIN03N
001 DIN03P
R2005 47
R2011 47
C2005 0.1uF
R2017 330
R2023 330
R2029 330
R2035 330
R2053 10
R2054 10
R2055 10
R2056 10
DIN03BN
DIN03BP
DIN03AN
DIN03AP

IC2006 MC100LVEL11DTR2
001 DIN11P
001 DIN11N
R2006 47
R2012 47
C2006 0.1uF
R2018 330
R2024 330
R2030 330
R2036 330
R2057 10
R2058 10
R2059 10
R2060 10
DIN11BP
DIN11BN
DIN11AP
DIN11AN

IC2101 MC100LVEL11DTR2
001 DIN02N
001 DIN02P
R2101 47
R2107 47
C2101 0.1uF
R2113 330
R2119 330
R2125 330
R2131 330
R2137 10
R2138 10
R2139 10
R2140 10
DIN02BN
DIN02BP
DIN02AN
DIN02AP

IC2102 MC100LVEL11DTR2
001 DIN10P
001 DIN10N
R2102 47
R2108 47
C2102 0.1uF
R2114 330
R2120 330
R2126 330
R2132 330
R2141 10
R2142 10
R2143 10
R2144 10
DIN10BP
DIN10BN
DIN10AP
DIN10AN

IC2103 MC100LVEL11DTR2
001 DIN01N
001 DIN01P
R2103 47
R2109 47
C2103 0.1uF
R2115 330
R2121 330
R2127 330
R2133 330
R2145 10
R2146 10
R2147 10
R2148 10
DIN01BN
DIN01BP
DIN01AN
DIN01AP

IC2104 MC100LVEL11DTR2
001 RSV_IN1P
001 RSV_IN1N
R2104 47
R2110 47
C2104 0.1uF
R2116 330
R2122 330
R2128 330
R2134 330
R2149 10
R2150 10
R2151 10
R2152 10
RSV_IN1BP
RSV_IN1BN
RSV_IN1AP
RSV_IN1AN

IC2105 MC100LVEL11DTR2
001 DMEMON1N
001 DMEMON1P
R2105 47
R2111 47
C2105 0.1uF
R2117 330
R2123 330
R2129 330
R2135 330
R2153 10
R2154 10
R2155 10
R2156 10
DMEMON1BN
DMEMON1BP
DMEMON1AN
DMEMON1AP

IC2106 MC100LVEL11DTR2
001 DMEMON2P
001 DMEMON2N
R2106 47
R2112 47
C2106 0.1uF
R2118 330
R2124 330
R2130 330
R2136 330
R2157 10
R2158 10
R2159 10
R2160 10
DMEMON2AP
DMEMON2AN
DMEMON2BP
DMEMON2BN

IC2201 MC100LVEL11DTR2
001 CCROUT1VN
001 CCROUT1VP
R2201 47
R2207 47
C2201 0.1uF
R2213 330
R2219 330
R2225 330
R2231 330
R2237 10
R2238 10
R2239 10
R2240 10
CCROUT1VAN
CCROUT1VAP
CCROUT1VBN
CCROUT1VBP

IC2202 MC100LVEL11DTR2
001 CCROUT2VP
001 CCROUT2VN
R2202 47
R2208 47
C2202 0.1uF
R2214 330
R2220 330
R2226 330
R2232 330
R2241 10
R2242 10
R2243 10
R2244 10
CCROUT2VAP
CCROUT2VAN
CCROUT2VBP
CCROUT2VBN

IC2203 MC100LVEL11DTR2
001 MYOUT1VN
001 MYOUT1VP
R2203 47
R2209 47
C2203 0.1uF
R2215 330
R2221 330
R2227 330
R2233 330
R2245 10
R2246 10
R2247 10
R2248 10
MYOUT1VAN
MYOUT1VAP
MYOUT1VBN
MYOUT1VBP

IC2204 MC100LVEL11DTR2
001 MYOUT2VP
001 MYOUT2VN
R2204 47
R2210 47
C2204 0.1uF
R2216 330
R2222 330
R2228 330
R2234 330
R2249 10
R2250 10
R2251 10
R2252 10
MYOUT2VAP
MYOUT2VAN
MYOUT2VBP
MYOUT2VBN

IC2205 MC100LVEL11DTR2
001 MYOUT3VN
001 MYOUT3VP
R2205 47
R2211 47
C2205 0.1uF
R2217 330
R2223 330
R2229 330
R2235 330
R2253 10
R2254 10
R2255 10
R2256 10
MYOUT3VAN
MYOUT3VAP
MYOUT3VBN
MYOUT3VBP

IC2206 MC100LVEL11DTR2
001 MYOUT4VP
001 MYOUT4VN
R2206 47
R2212 47
C2206 0.1uF
R2218 330
R2224 330
R2230 330
R2236 330
R2257 10
R2258 10
R2259 10
R2260 10
MYOUT4VAP
MYOUT4VAN
MYOUT4VBP
MYOUT4VBN

Cross Point Board
XPT-29 (12/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_12

4-292

MVS-6000 MM

XPT-29 (13/23)
SUFFIX: -11

SDI_IN_A 010, 011, 012, 014, 015
SDI_IN_B 010, 011, 012, 016, 017

IC2301 MC100LVEL11DTR2
001 MYOUT5VN
001 MYOUT5VP
R2301 47
R2307 47
C2307 0.1uF
C2301 0.1uF
R2313 330
R2319 330
R2325 330
R2331 330
R2337 10
R2338 10
R2339 10
R2340 10
MYOUT5VAN
MYOUT5VAP
MYOUT5VBN
MYOUT5VBP

IC2302 MC100LVEL11DTR2
001 MYOUT6VP
001 MYOUT6VN
R2302 47
R2308 47
C2308 0.1uF
C2302 0.1uF
R2314 330
R2320 330
R2326 330
R2332 330
R2341 10
R2342 10
R2343 10
R2344 10
MYOUT6VAP
MYOUT6VAN
MYOUT6VBP
MYOUT6VBN

IC2303 MC100LVEL11DTR2
001 MYOUT7VN
001 MYOUT7VP
R2303 47
R2309 47
C2309 0.1uF
C2303 0.1uF
R2315 330
R2321 330
R2327 330
R2333 330
R2345 10
R2346 10
R2347 10
R2348 10
MYOUT7VAN
MYOUT7VAP
MYOUT7VBN
MYOUT7VBP

IC2304 MC100LVEL11DTR2
001 MYOUT8VP
001 MYOUT8VN
R2304 47
R2310 47
C2310 0.1uF
C2304 0.1uF
R2316 330
R2322 330
R2328 330
R2334 330
R2349 10
R2350 10
R2351 10
R2352 10
MYOUT8VAP
MYOUT8VAN
MYOUT8VBP
MYOUT8VBN

IC2305 MC100LVEL11DTR2
001 ME1_OUT6VN
001 ME1_OUT6VP
R2305 47
R2311 47
C2311 0.1uF
C2305 0.1uF
R2317 330
R2323 330
R2329 330
R2335 330
R2353 10
R2354 10
R2355 10
R2356 10
ME1_OUT6VBN
ME1_OUT6VBP
ME1_OUT6VAN
ME1_OUT6VAP

IC2306 MC100LVEL11DTR2
001 PP_OUT6VP
001 PP_OUT6VN
R2306 47
R2312 47
C2312 0.1uF
C2306 0.1uF
R2318 330
R2324 330
R2330 330
R2336 330
R2357 10
R2358 10
R2359 10
R2360 10
PP_OUT6VBP
PP_OUT6VBN
PP_OUT6VAP
PP_OUT6VAN

IC2401 MC100LVEL11DTR2
001 ME1_OUT5VN
001 ME1_OUT5VP
R2401 47
R2407 47
C2407 0.1uF
C2401 0.1uF
R2413 330
R2419 330
R2425 330
R2431 330
R2437 10
R2438 10
R2439 10
R2440 10
ME1_OUT5VBN
ME1_OUT5VBP
ME1_OUT5VAN
ME1_OUT5VAP

IC2402 MC100LVEL11DTR2
001 PP_OUT5VP
001 PP_OUT5VN
R2402 47
R2408 47
C2408 0.1uF
C2402 0.1uF
R2414 330
R2420 330
R2426 330
R2432 330
R2441 10
R2442 10
R2443 10
R2444 10
PP_OUT5VBP
PP_OUT5VBN
PP_OUT5VAP
PP_OUT5VAN

IC2403 MC100LVEL11DTR2
001 PP_OUT2VN
001 PP_OUT2VP
R2403 47
R2409 47
C2409 0.1uF
C2403 0.1uF
R2415 330
R2421 330
R2427 330
R2433 330
R2445 10
R2446 10
R2447 10
R2448 10
PP_OUT2VBN
PP_OUT2VBP
PP_OUT2VAN
PP_OUT2VAP

IC2404 MC100LVEL11DTR2
001 PP_OUT4VP
001 PP_OUT4VN
R2404 47
R2410 47
C2410 0.1uF
C2404 0.1uF
R2416 330
R2422 330
R2428 330
R2434 330
R2449 10
R2450 10
R2451 10
R2452 10
PP_OUT4VBP
PP_OUT4VBN
PP_OUT4VAP
PP_OUT4VAN

IC2405 MC100LVEL11DTR2
001 ME1_OUT2VN
001 ME1_OUT2VP
R2405 47
R2411 47
C2411 0.1uF
C2405 0.1uF
R2417 330
R2423 330
R2429 330
R2435 330
R2453 10
R2454 10
R2455 10
R2456 10
ME1_OUT2VBN
ME1_OUT2VBP
ME1_OUT2VAN
ME1_OUT2VAP

IC2406 MC100LVEL11DTR2
001 ME1_OUT4VP
001 ME1_OUT4VN
R2406 47
R2412 47
C2412 0.1uF
C2406 0.1uF
R2418 330
R2424 330
R2430 330
R2436 330
R2457 10
R2458 10
R2459 10
R2460 10
ME1_OUT4VBP
ME1_OUT4VBN
ME1_OUT4VAP
ME1_OUT4VAN

IC2501 MC100LVEL11DTR2
001 PP_OUT1VN
001 PP_OUT1VP
R2501 47
R2505 47
C2505 0.1uF
C2501 0.1uF
R2509 330
R2513 330
R2517 330
R2521 330
R2525 10
R2526 10
R2527 10
R2528 10
PP_OUT1VBN
PP_OUT1VBP
PP_OUT1VAN
PP_OUT1VAP

IC2502 MC100LVEL11DTR2
001 PP_OUT3VP
001 PP_OUT3VN
R2502 47
R2506 47
C2506 0.1uF
C2502 0.1uF
R2510 330
R2514 330
R2518 330
R2522 330
R2529 10
R2530 10
R2531 10
R2532 10
PP_OUT3VBP
PP_OUT3VBN
PP_OUT3VAP
PP_OUT3VAN

IC2503 MC100LVEL11DTR2
001 ME1_OUT1VN
001 ME1_OUT1VP
R2503 47
R2507 47
C2507 0.1uF
C2503 0.1uF
R2511 330
R2515 330
R2519 330
R2523 330
R2533 10
R2534 10
R2535 10
R2536 10
ME1_OUT1VBN
ME1_OUT1VBP
ME1_OUT1VAN
ME1_OUT1VAP


IC2504 MC100LVEL11DTR2
001 ME1_OUT3VP
001 ME1_OUT3VN
R2504 47
R2508 47
C2508 0.1uF
C2504 0.1uF
R2512 330
R2516 330
R2520 330
R2524 330
R2537 10
R2538 10
R2539 10
R2540 10
ME1_OUT3VBP
ME1_OUT3VBN
ME1_OUT3VAP
ME1_OUT3VAN

+3.3V
GND
VCC VEE D D Q0 Q1 Q0 Q1

Cross Point Board
XPT-29 (13/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_13

XPT-29 (14/23)
SUFFIX: -11

Matrix AO

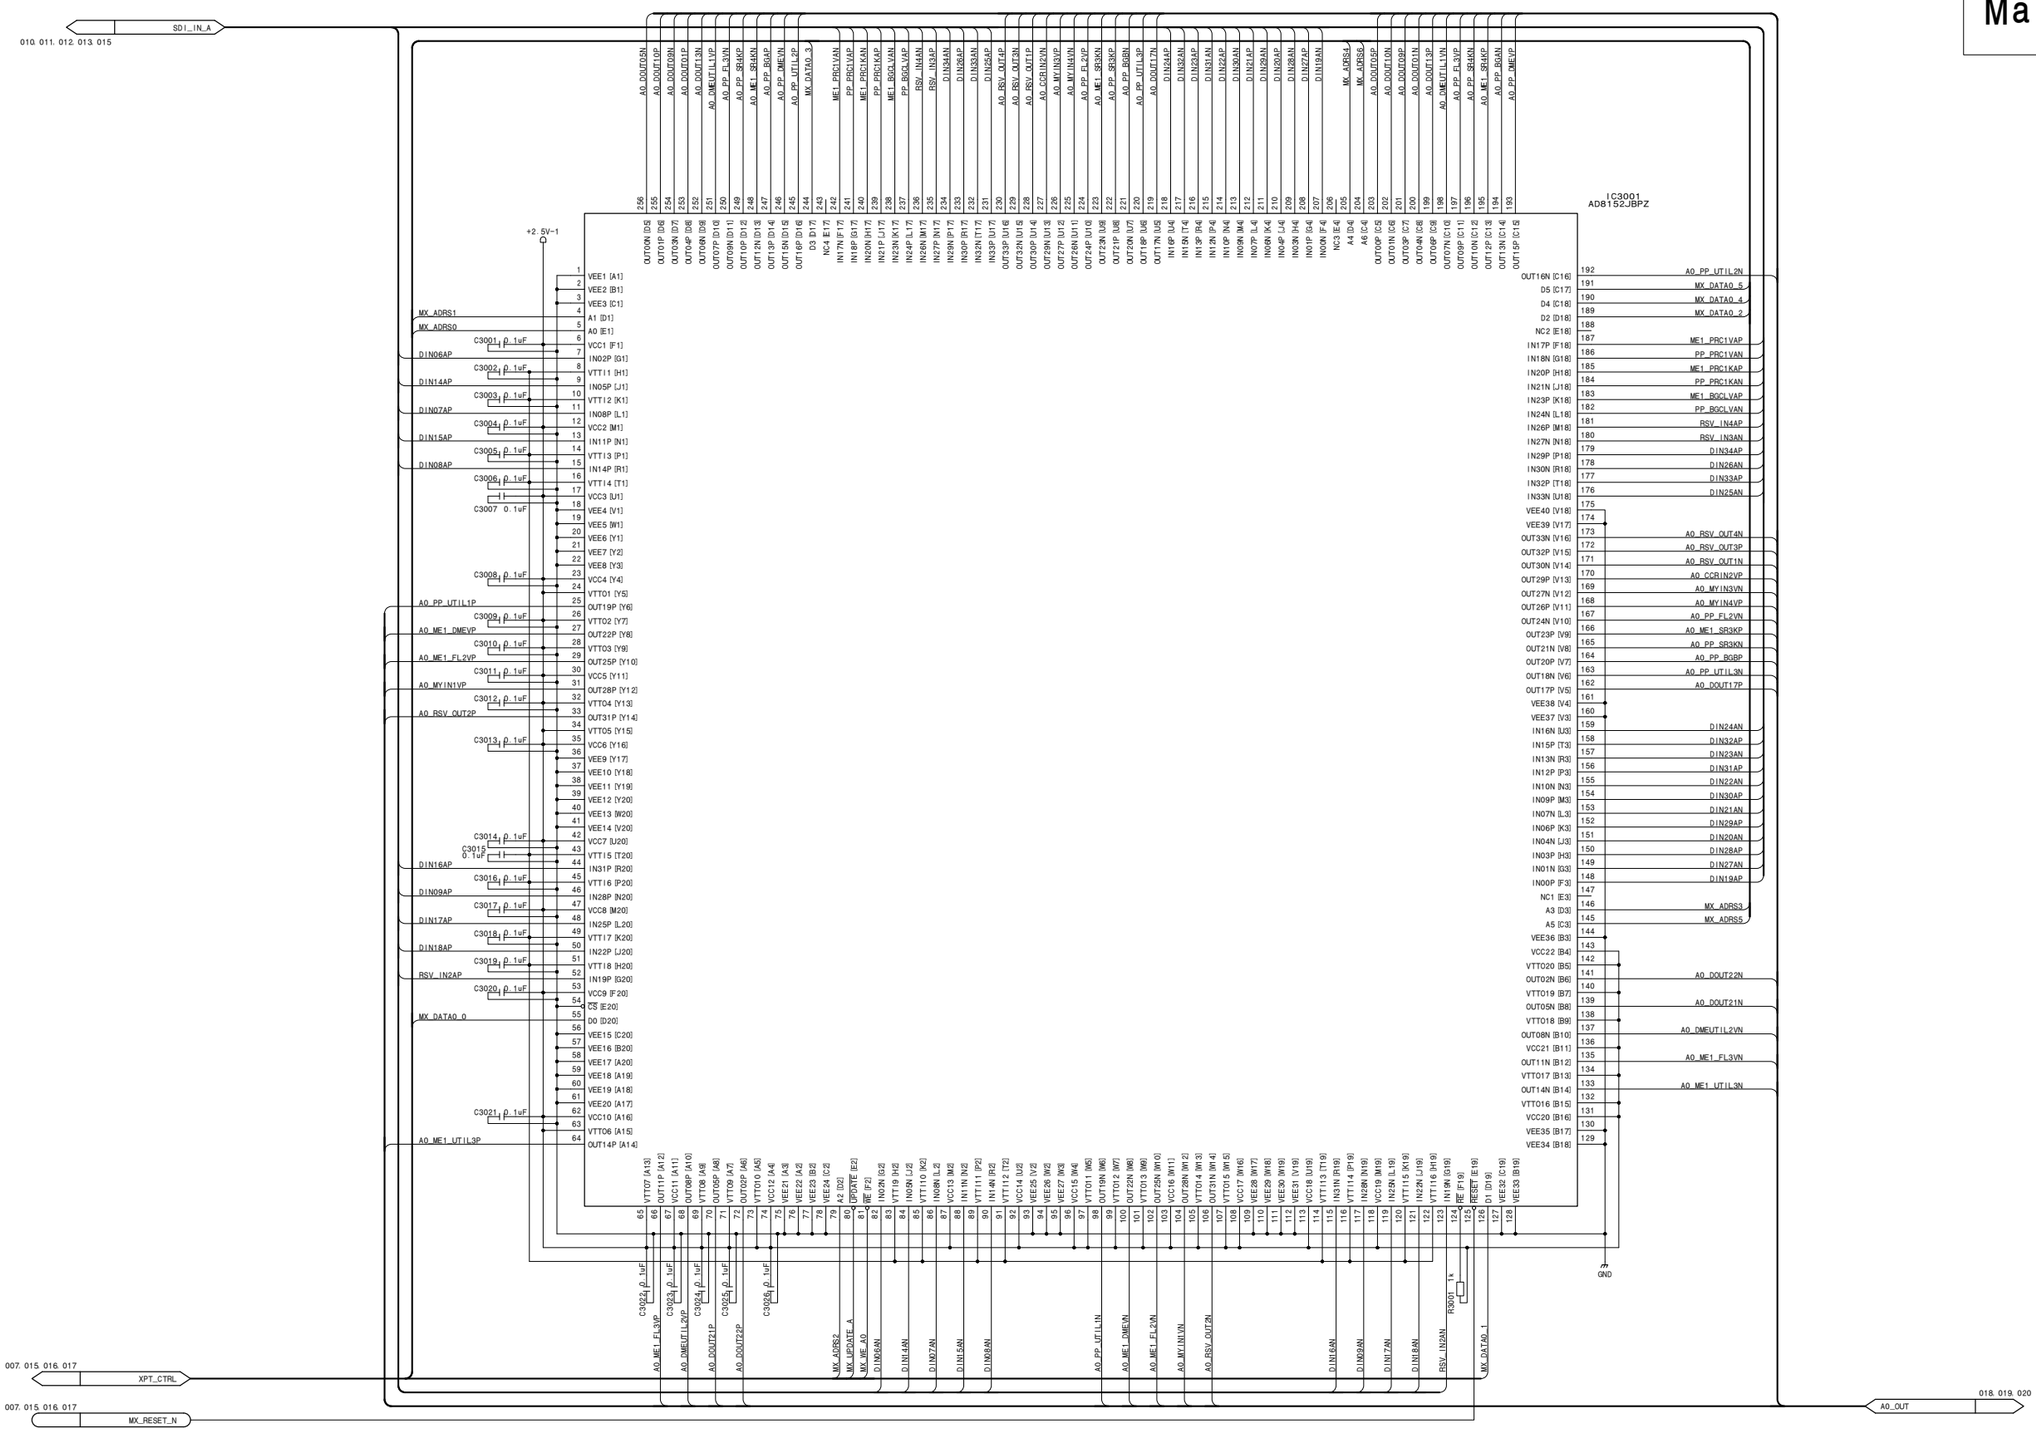


4-294

MVS-6000 MM

Cross Point Board
XPT-29 (14/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_14

XPT-29 (15/23)
SUFFIX: -11


Matrix A1

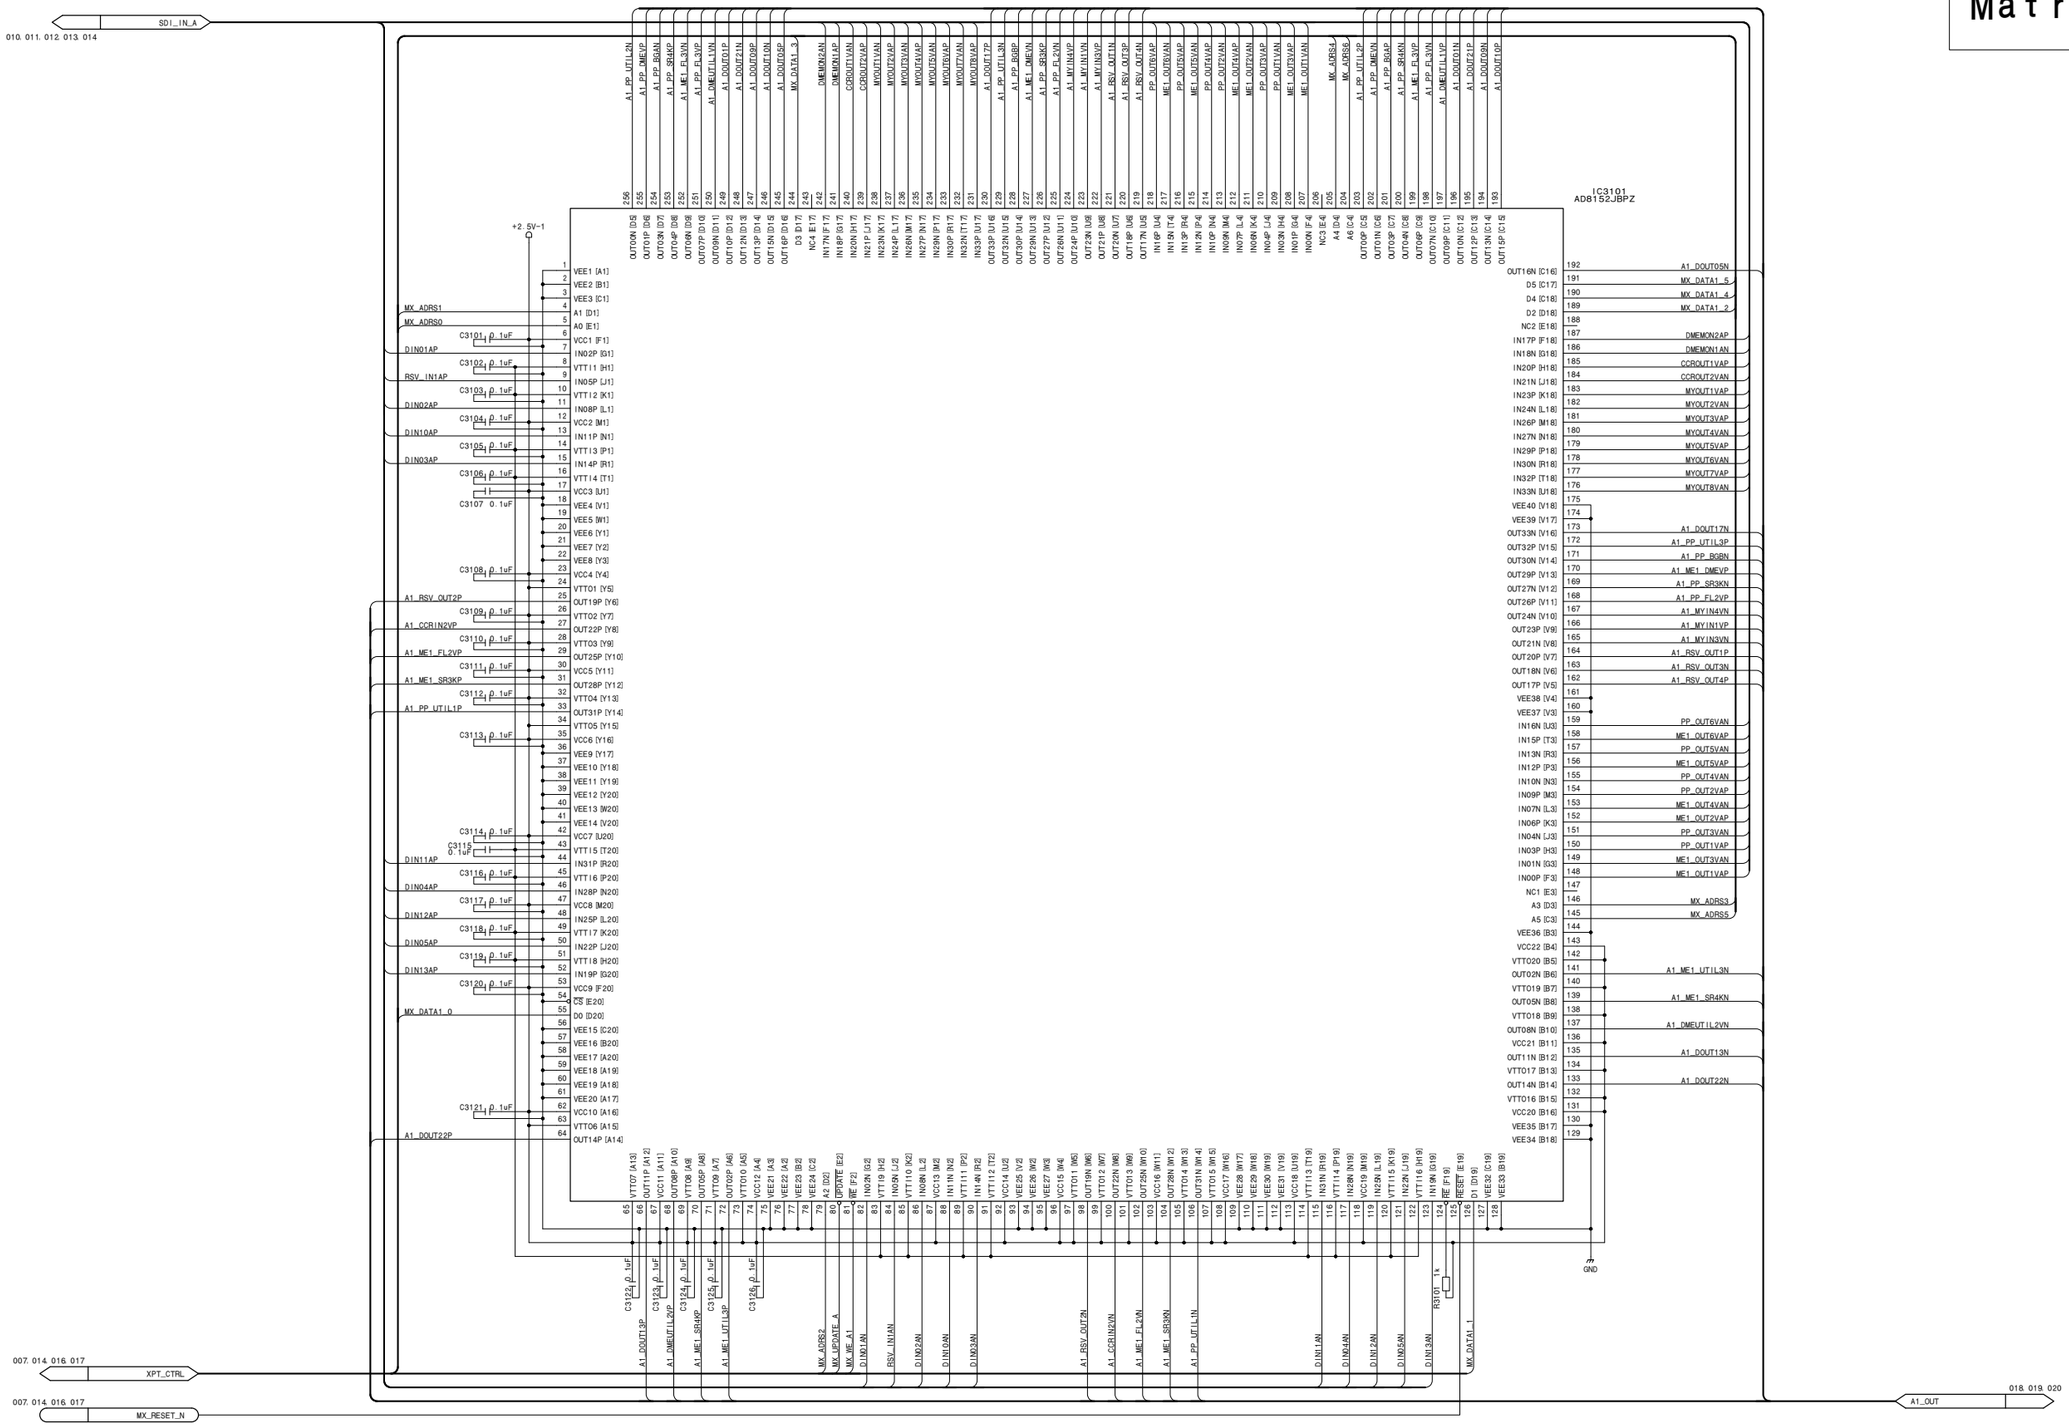

Cross Point Board
XPT-29 (15/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_15

XPT-29 (16/23)
SUFFIX: -11


Matrix B0

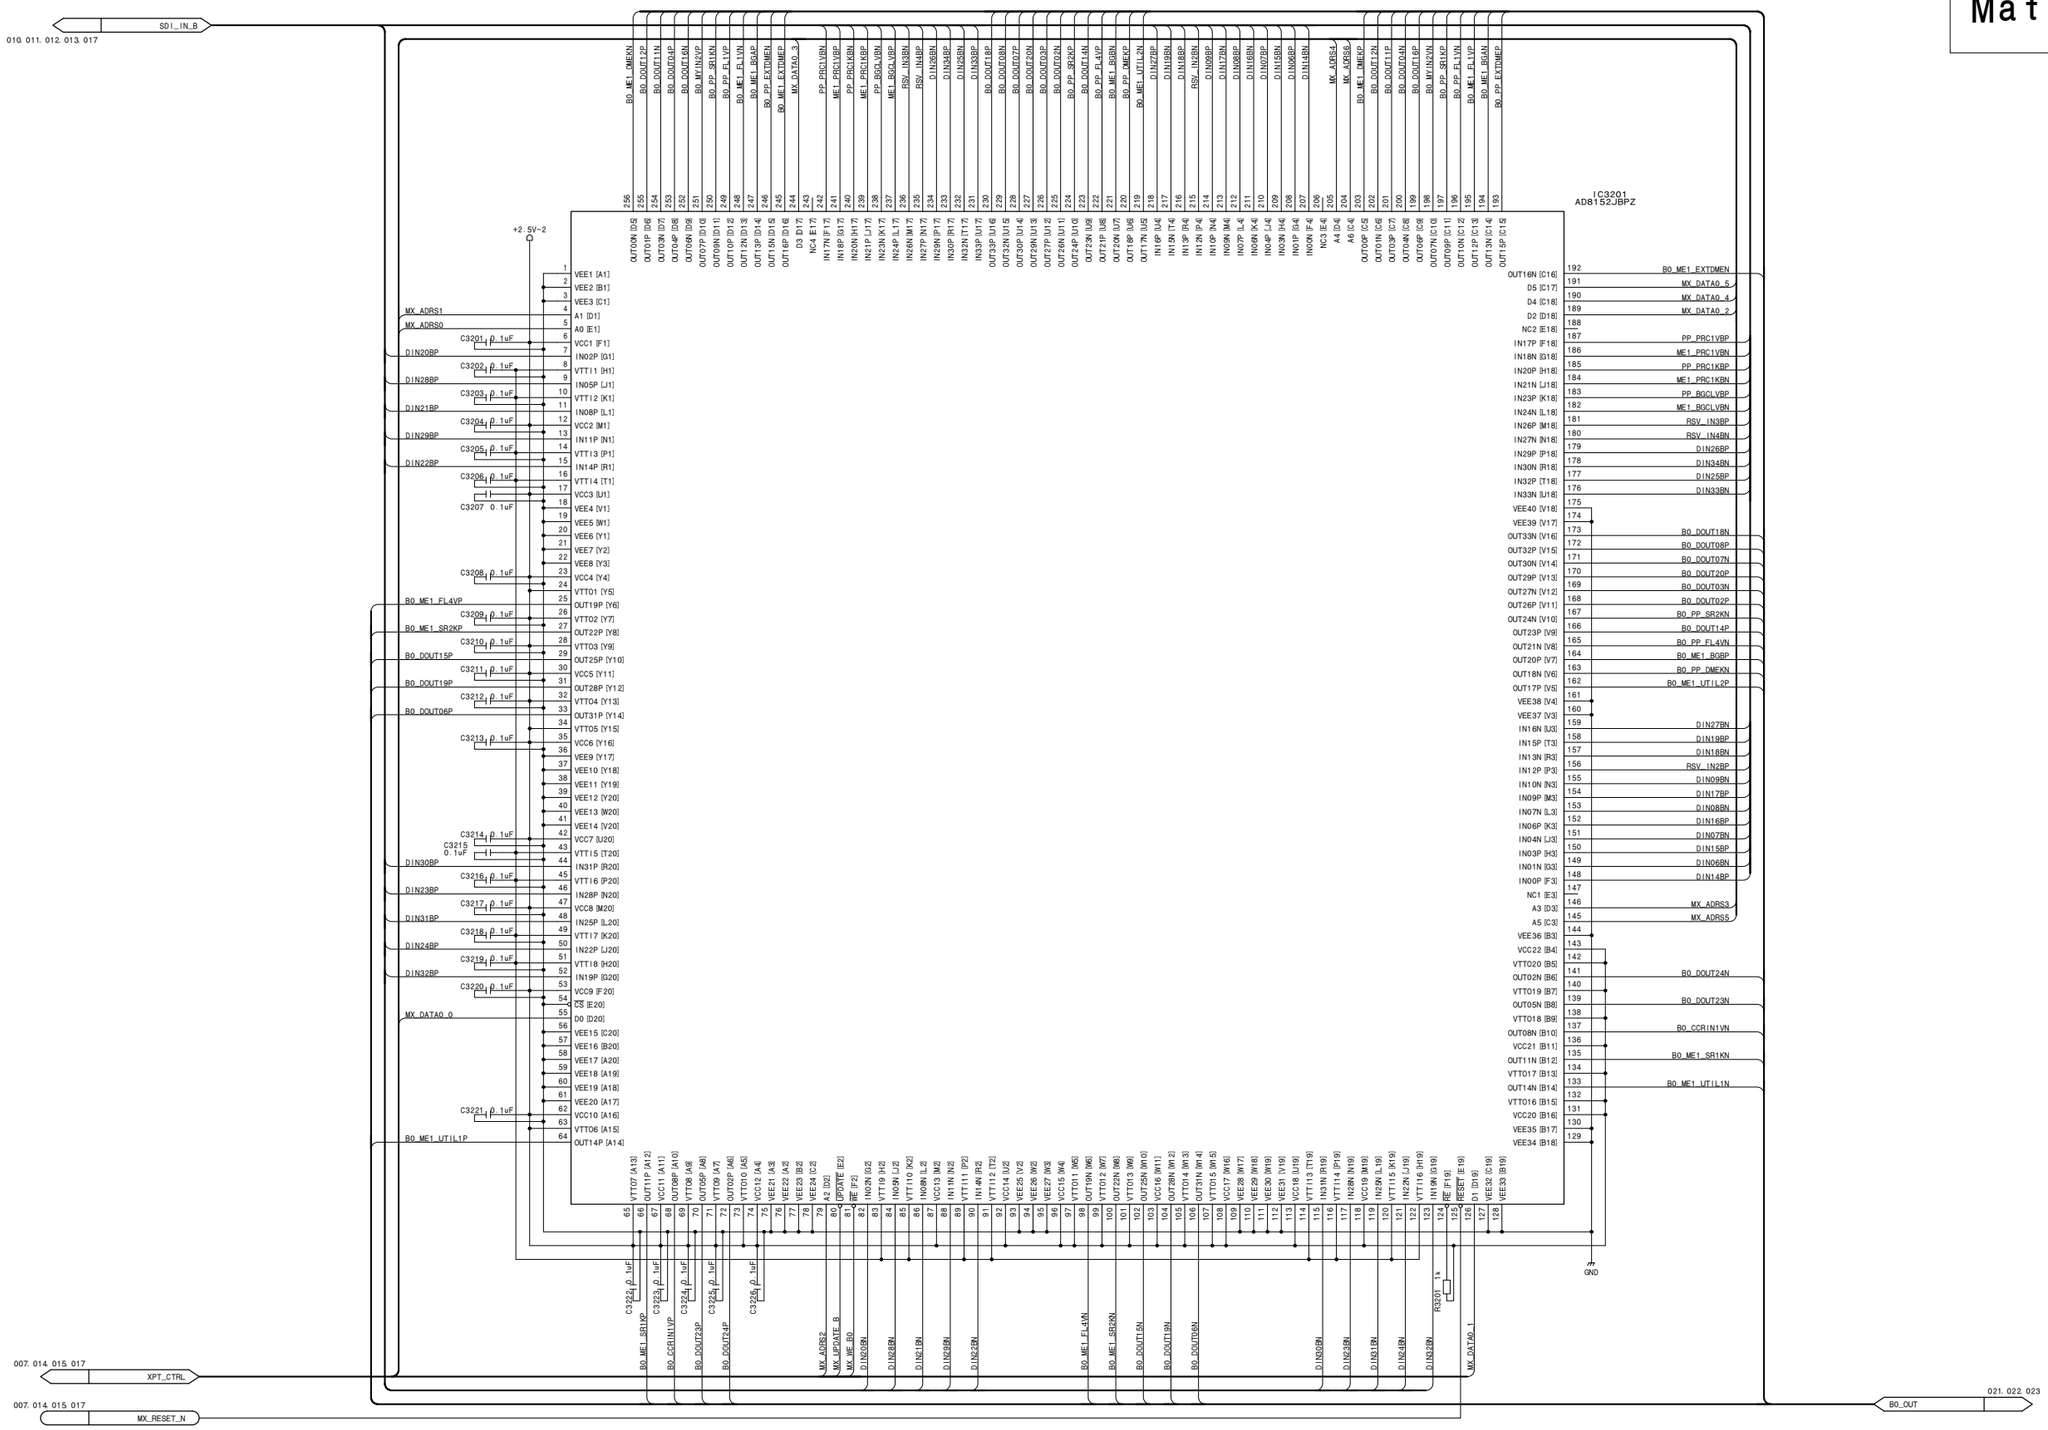

Cross Point Board
XPT-29 (16/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_16


XPT-29 (17/23)
SUFFIX: -11

Matrix B1

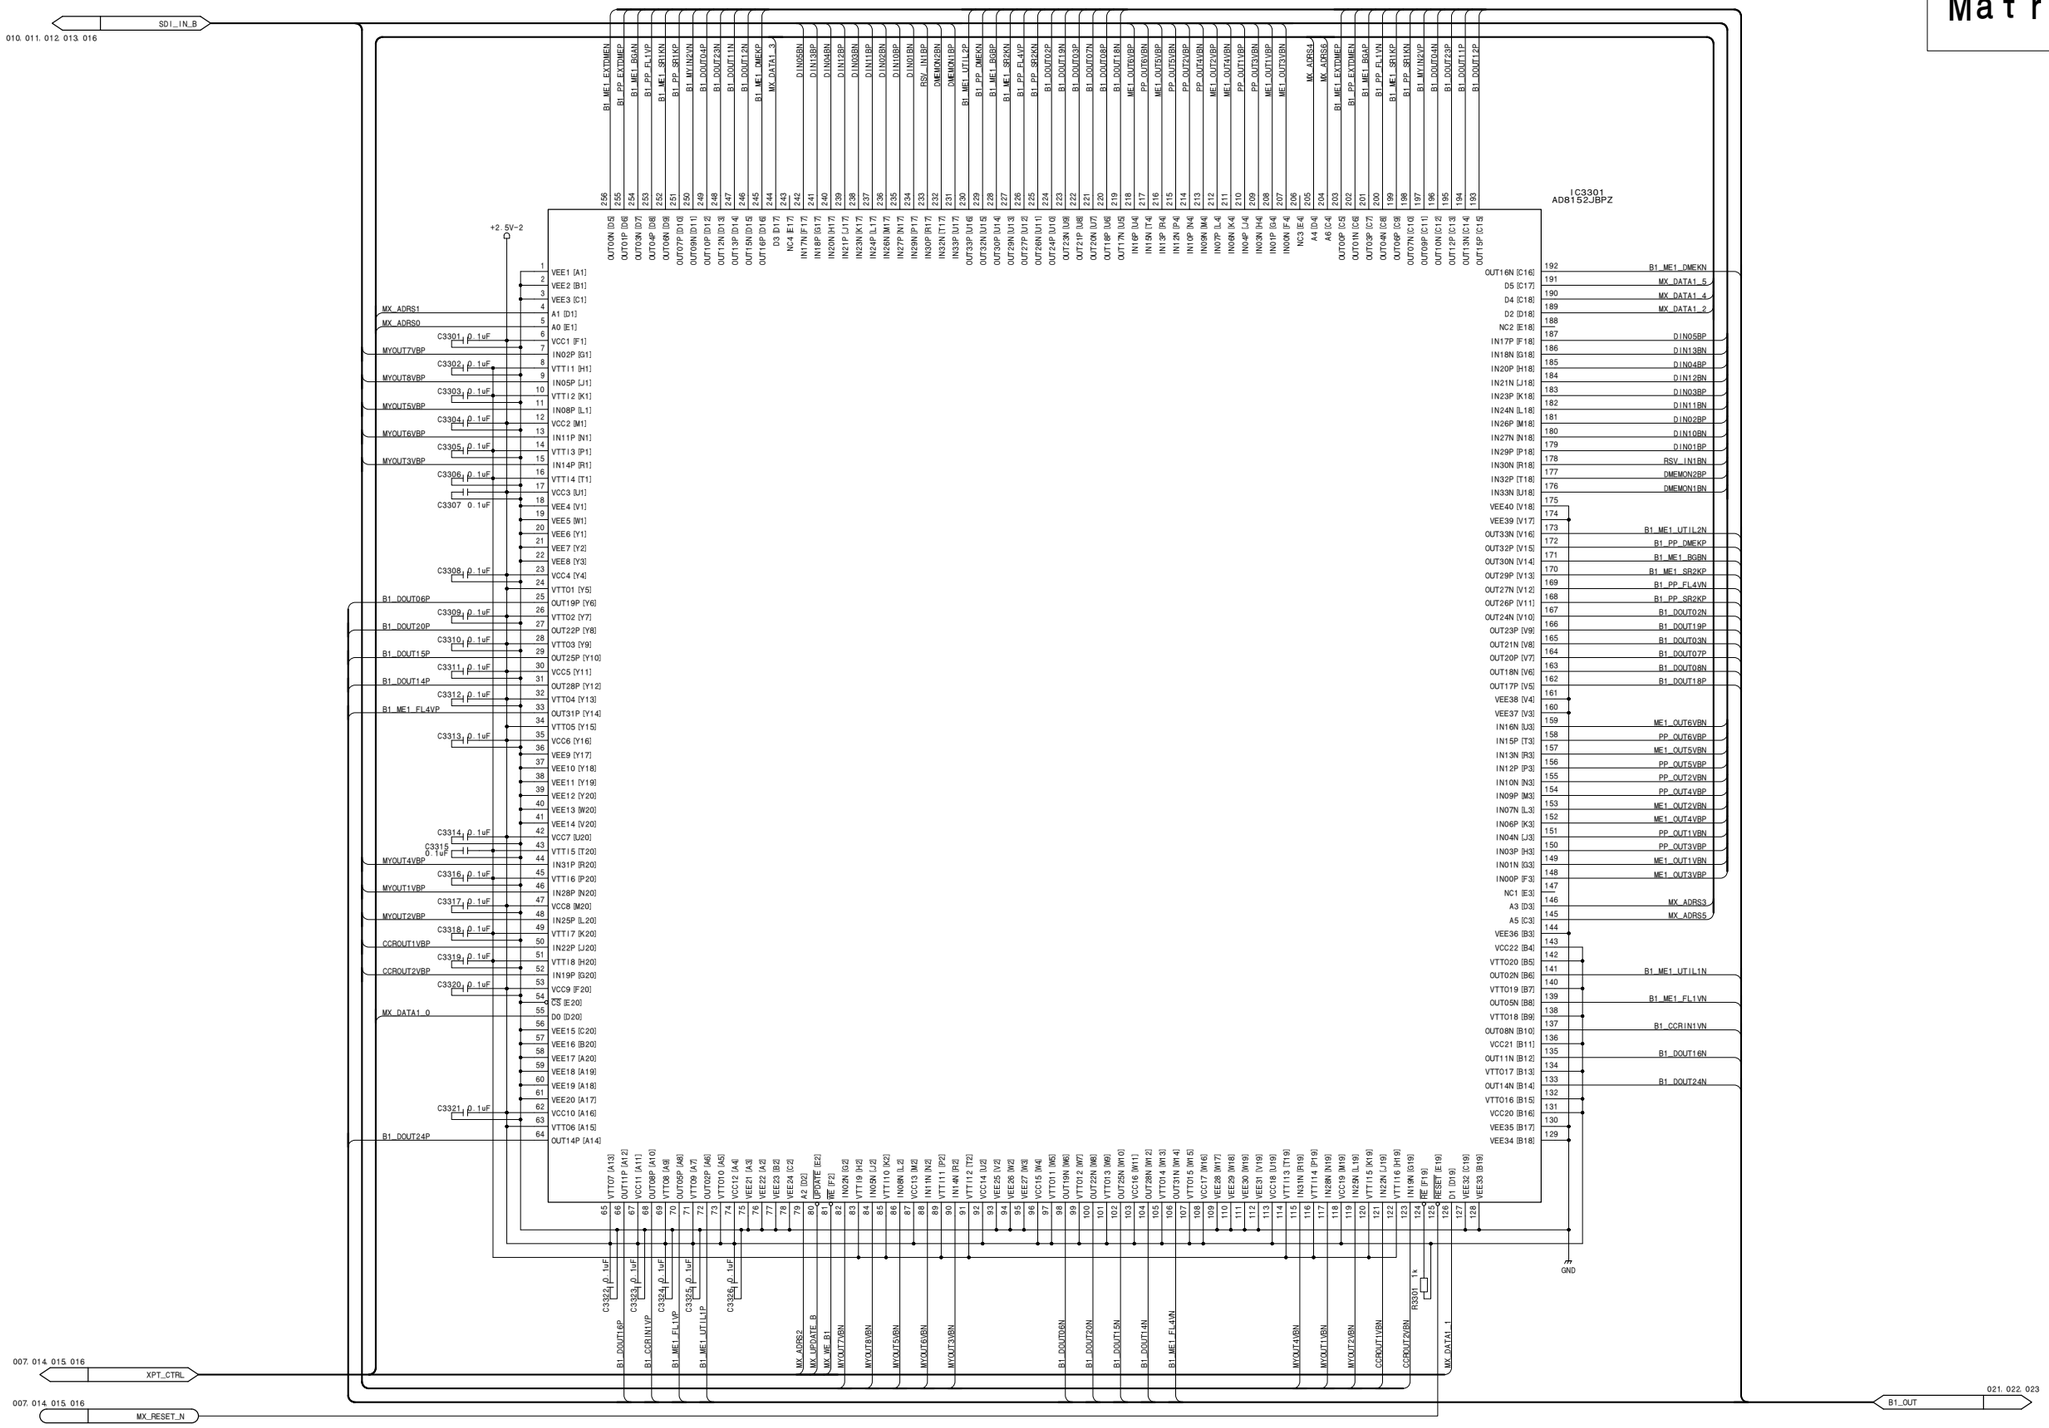

Cross Point Board
XPT-29 (17/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_17

XPT-29 (18/23)
SUFFIX: -11

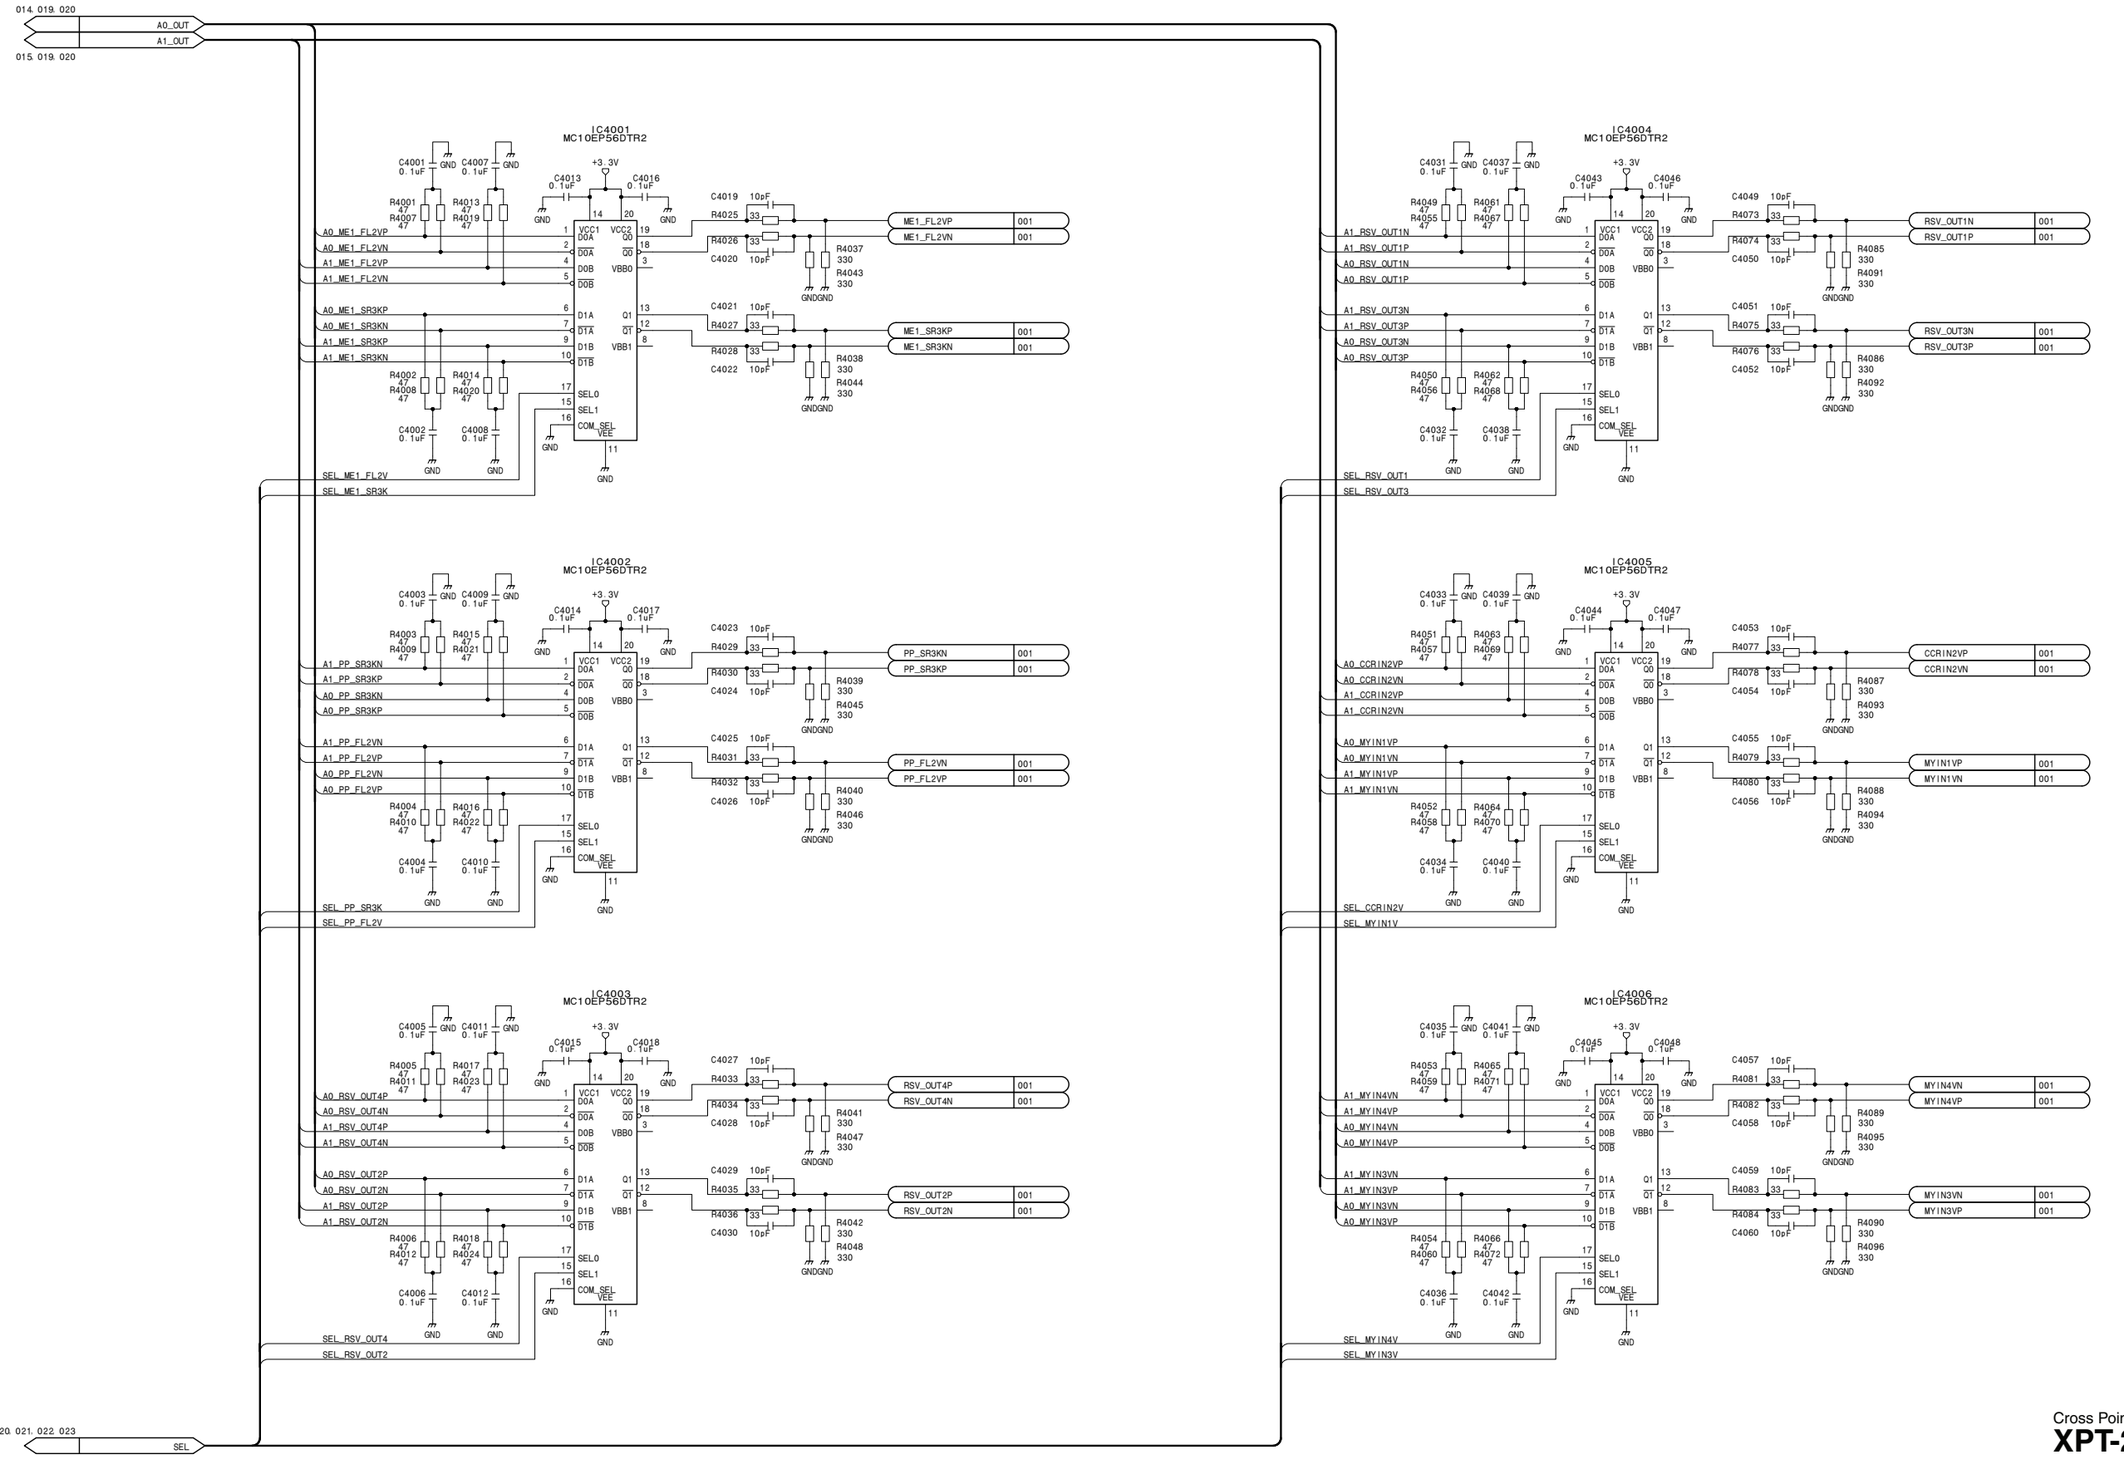


Cross Point Board
XPT-29 (18/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_18

4-298


MVS-6000 MM

XPT-29 (19/23)
SUFFIX: -11

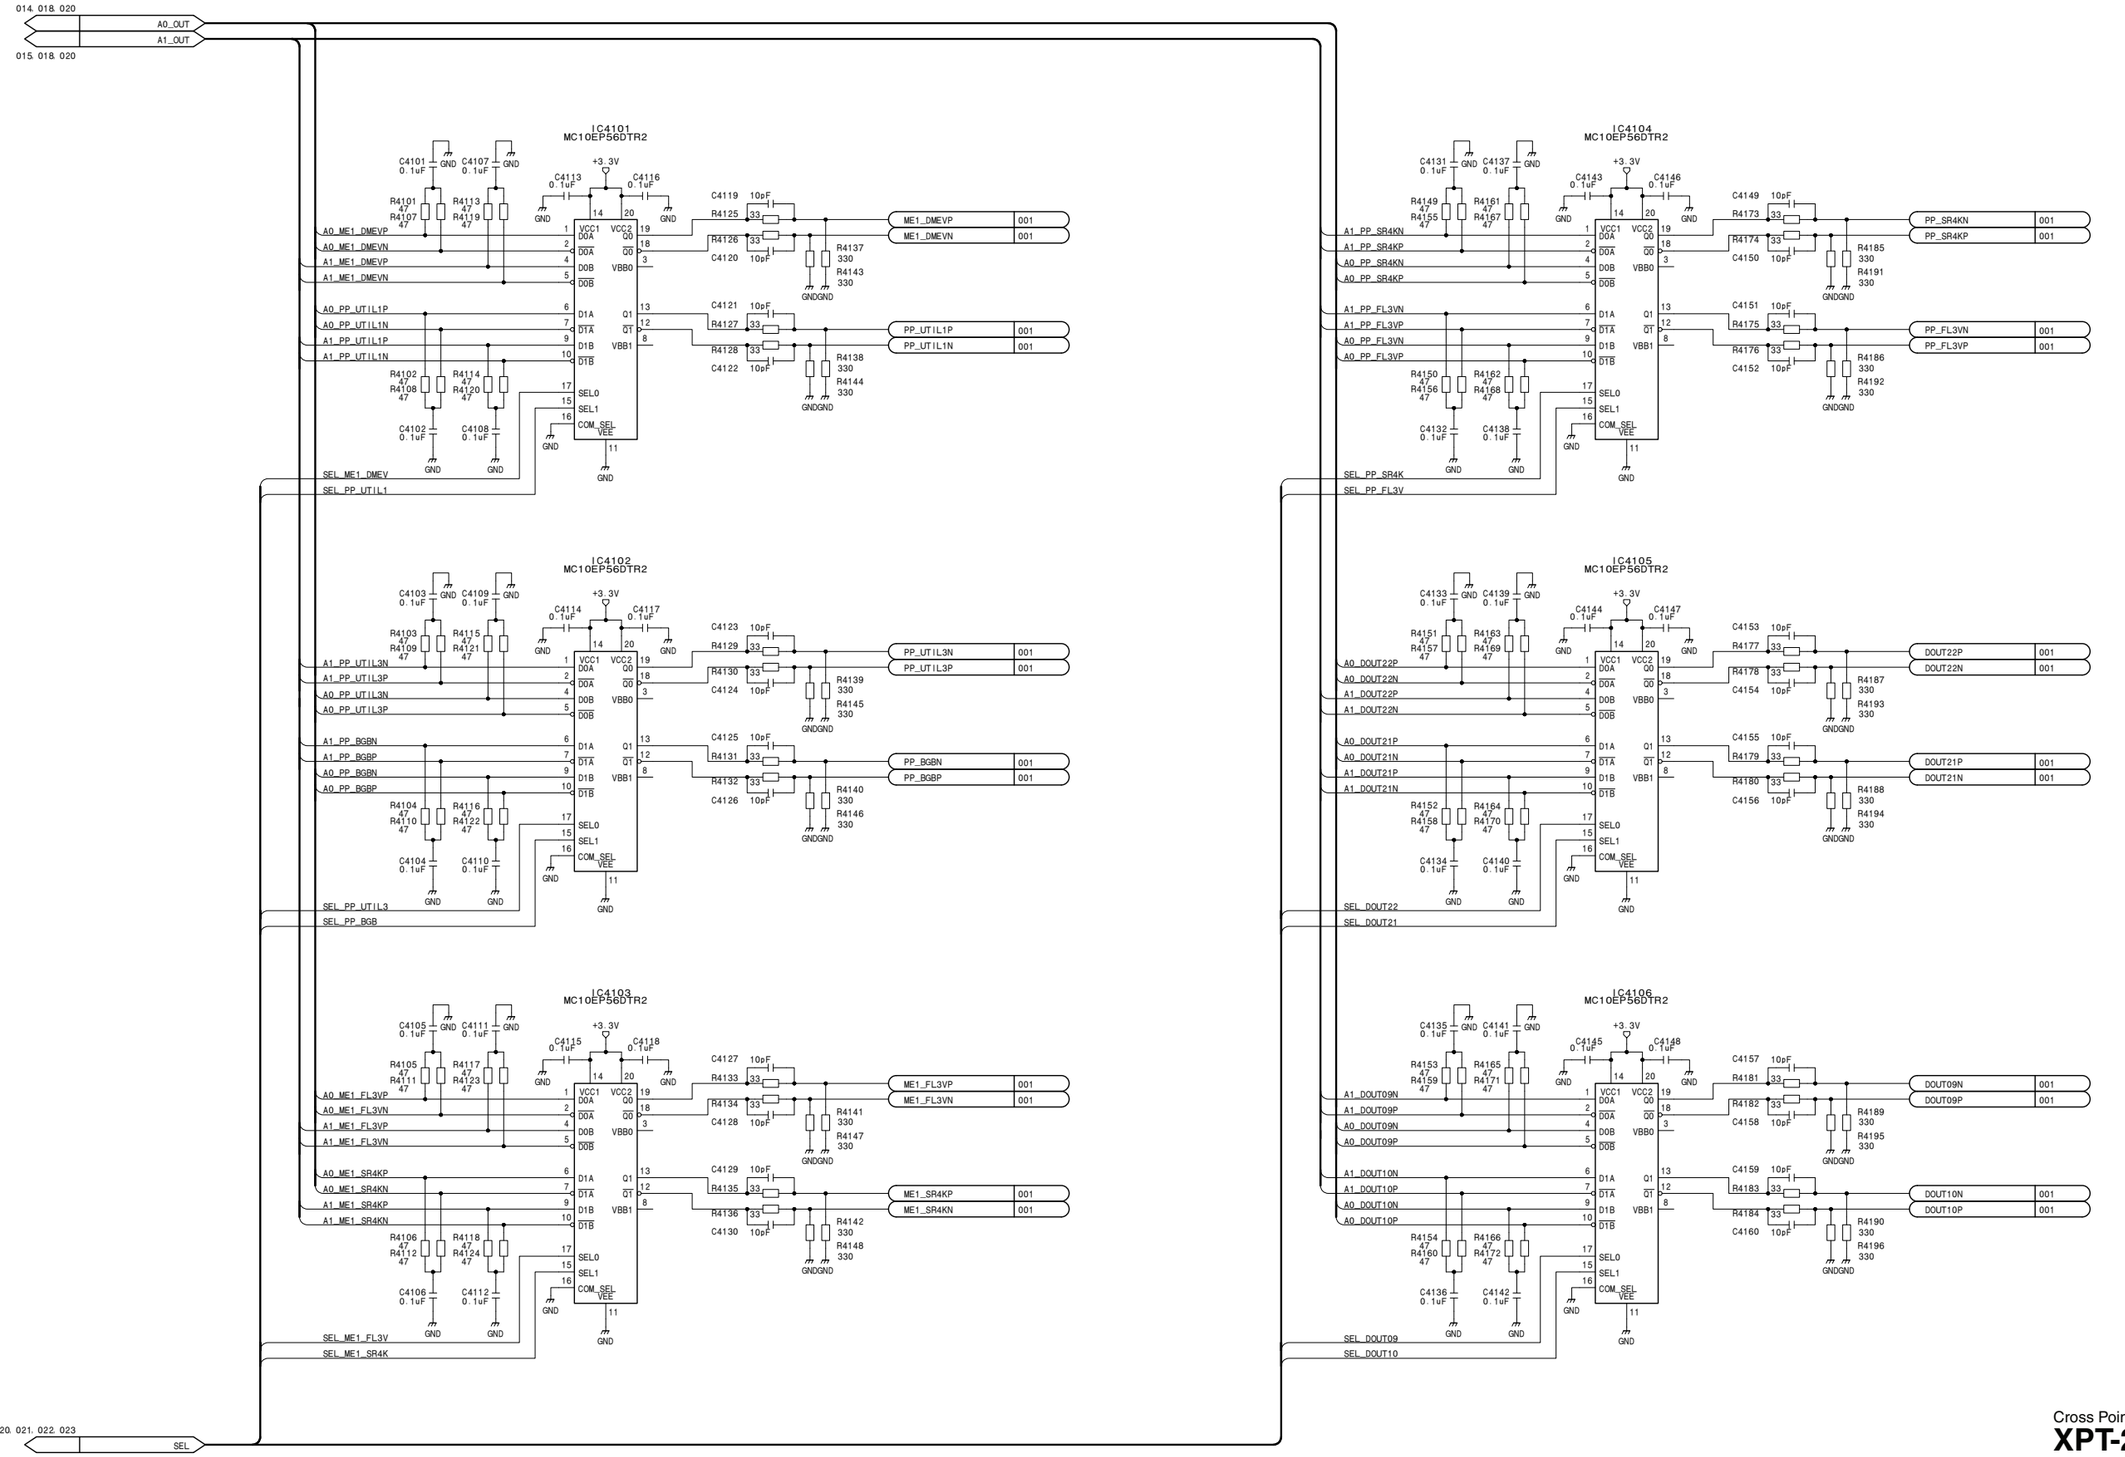


Cross Point Board
XPT-29 (19/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_19

XPT-29 (20/23)
SUFFIX: -11

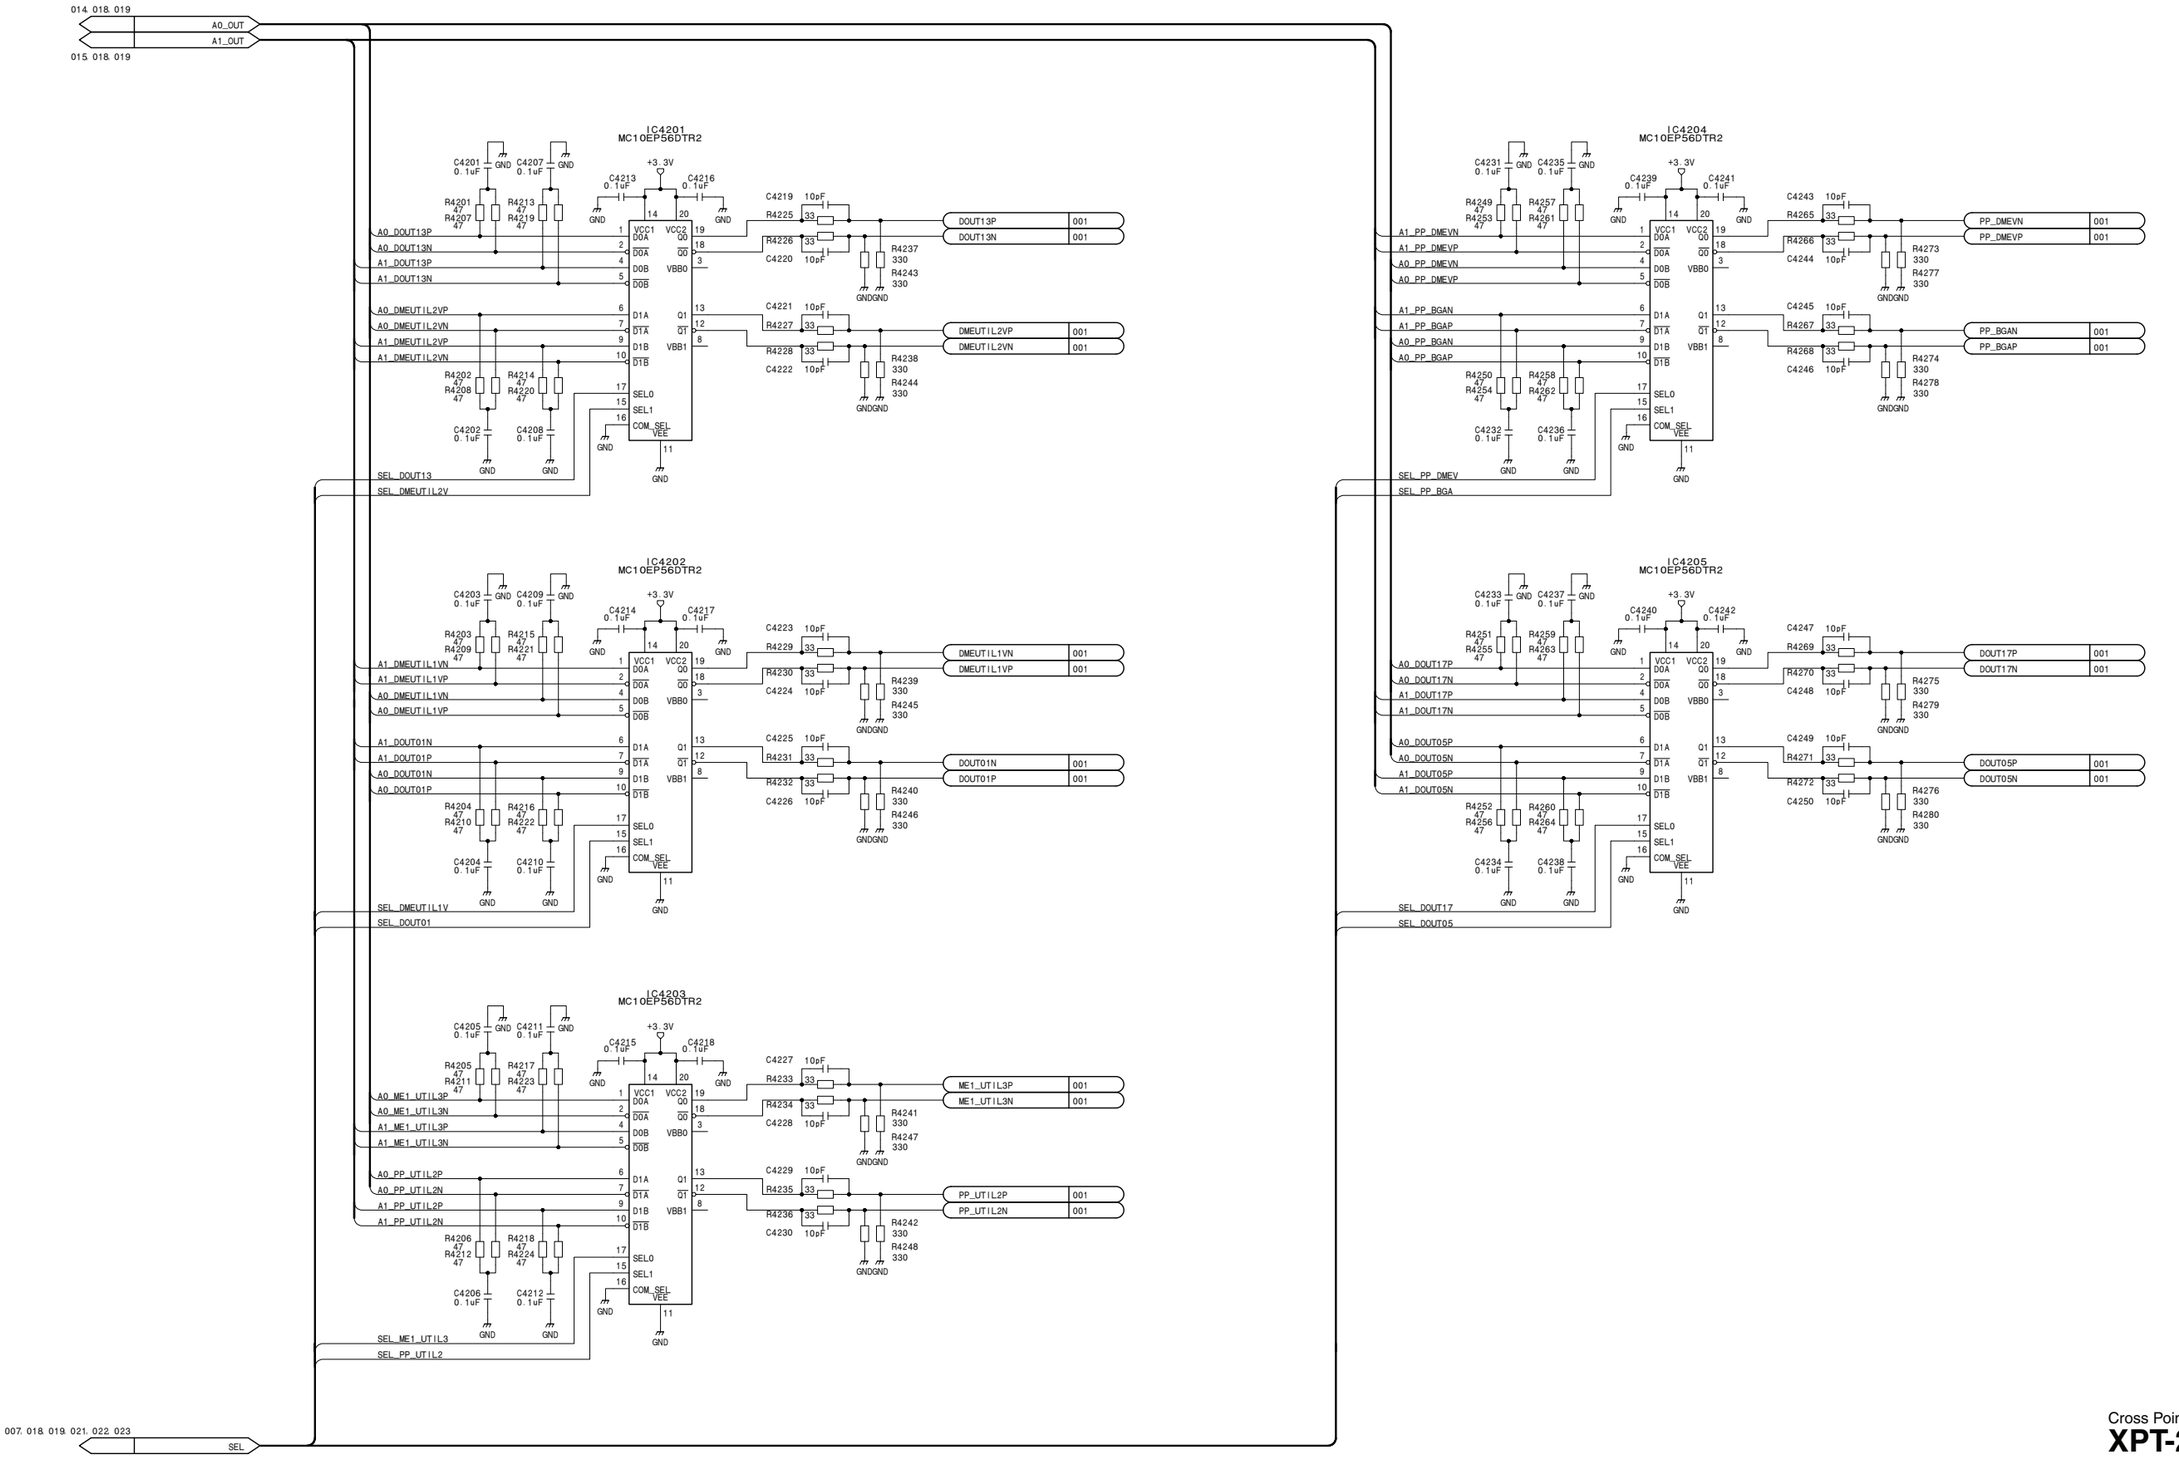

Cross Point Board
XPT-29 (20/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_20

XPT-29 (21/23)
SUFFIX: -11

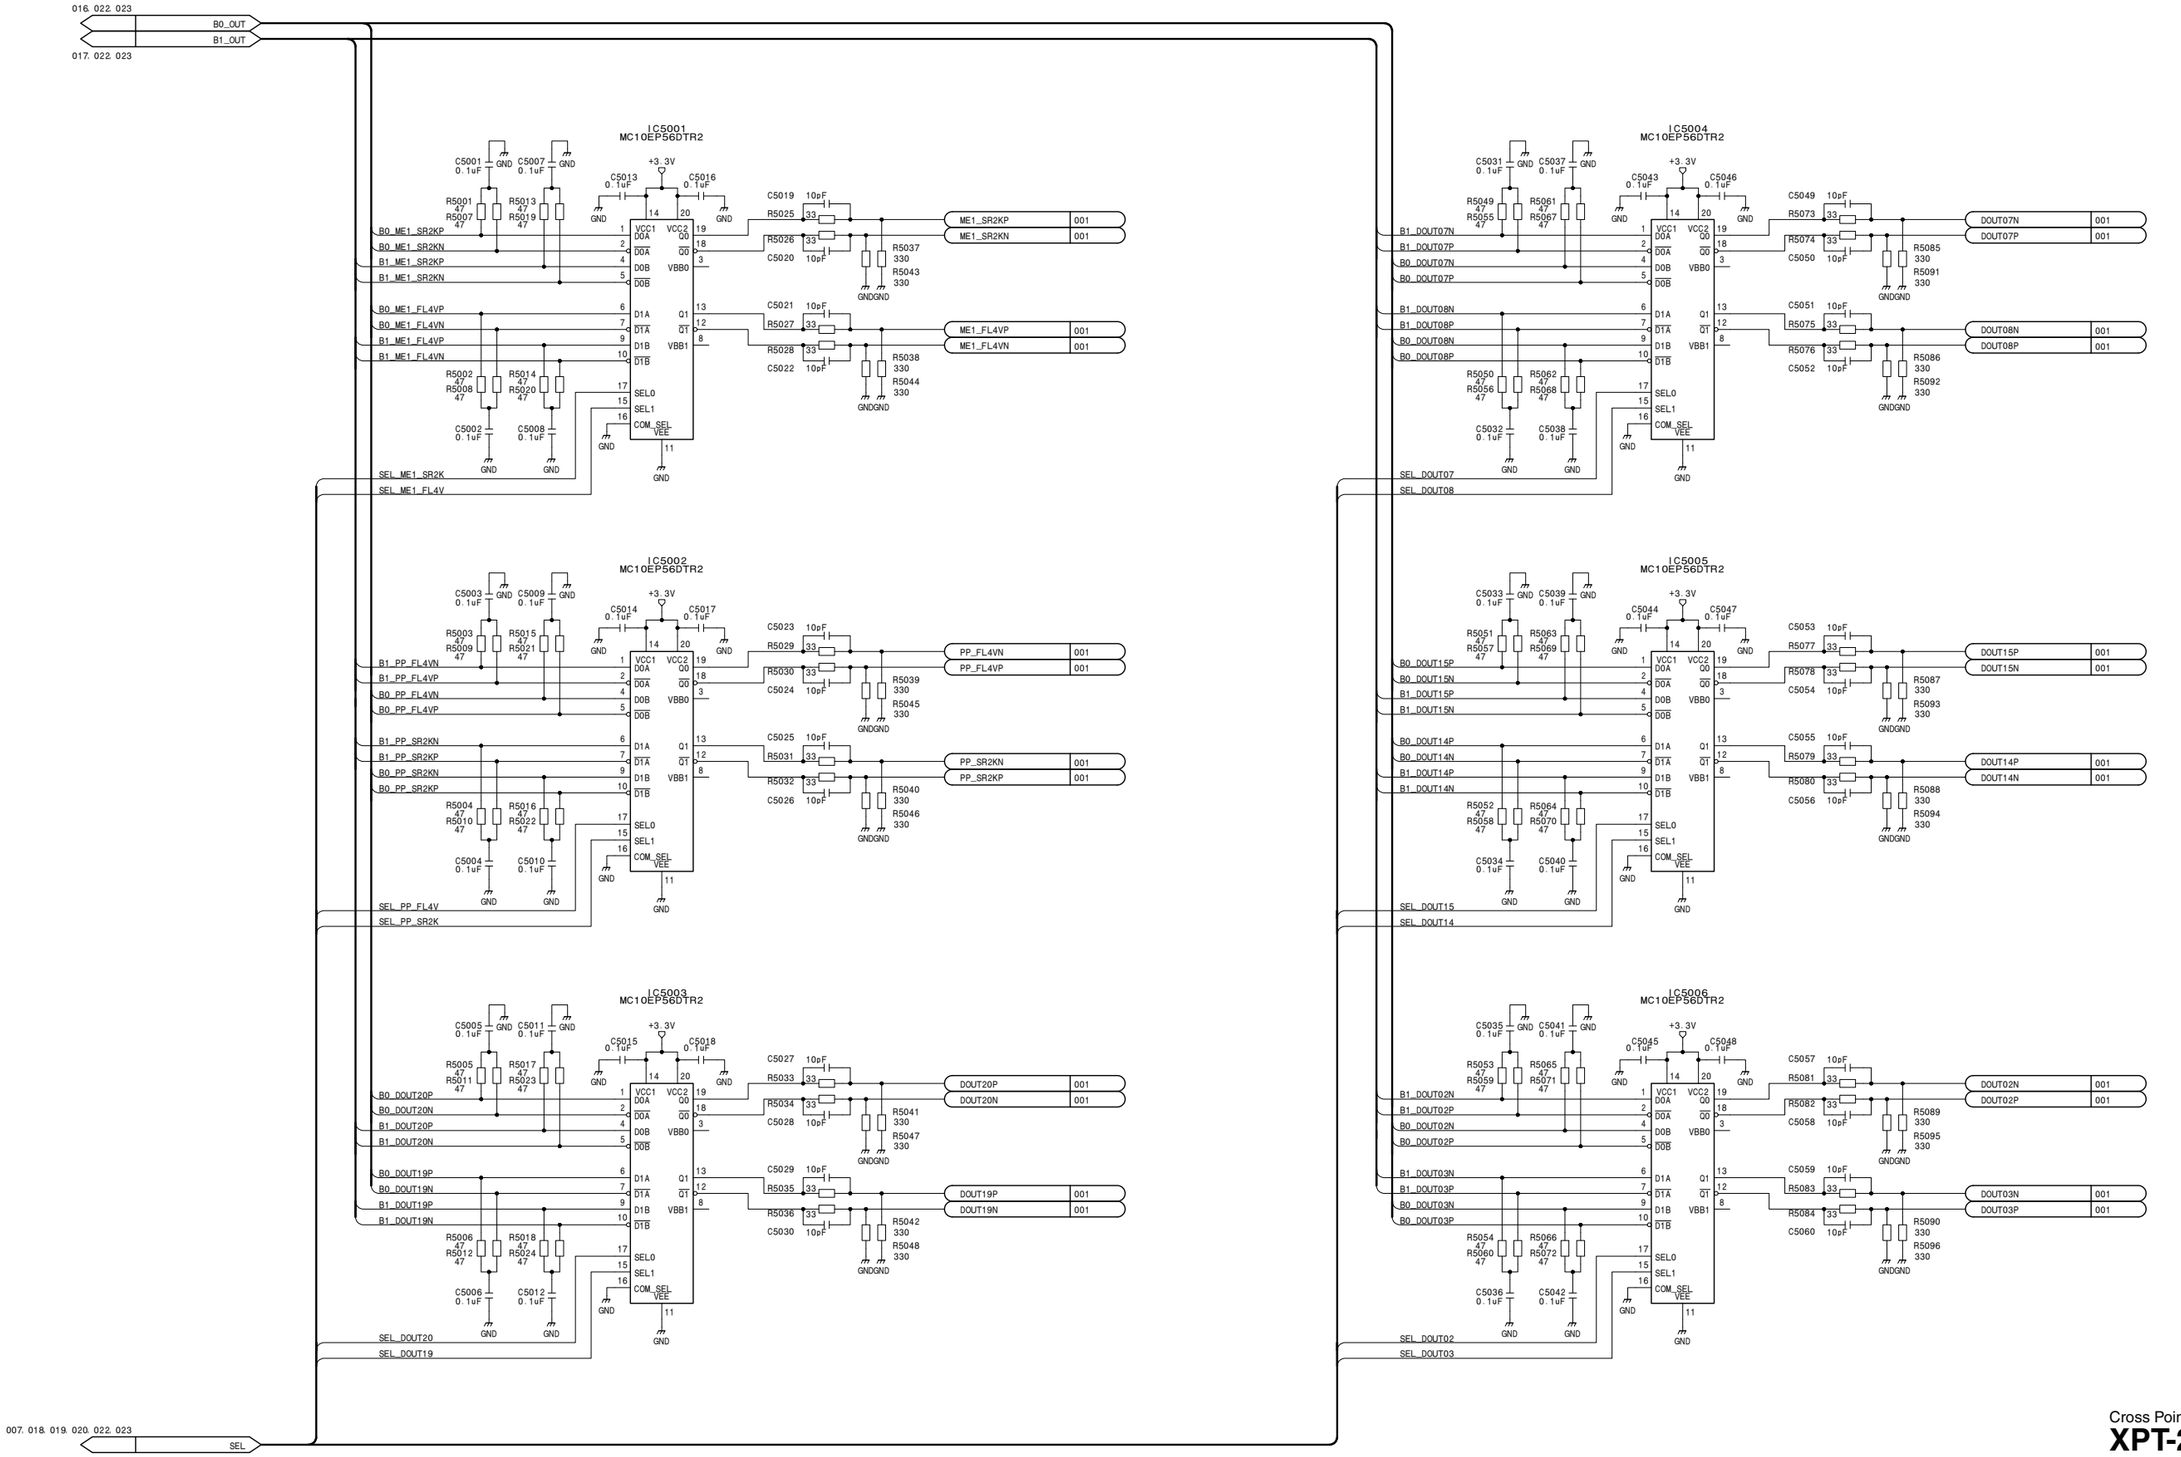

Cross Point Board
XPT-29 (21/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_21

XPT-29 (22/23)
SUFFIX: -11

016, 021, 023 — B0_OUT
017, 021, 023 — B1_OUT

IC5101 MC10EP56DTR2
B0_ME1_UTIL2P
B0_ME1_UTIL2N
B1_ME1_UTIL2P
B1_ME1_UTIL2N
B0_ME1_DMEKP
B0_ME1_DMEKN
B1_ME1_DMEKP
B1_ME1_DMEKN
SEL_ME1_UTIL2
SEL_ME1_DMEK
ME1_UTIL2P 001
ME1_UTIL2N 001
ME1_DMEKP 001
ME1_DMEKN 001

IC5102 MC10EP56DTR2
B1_PP_DMEKN
B1_PP_DMEKP
B0_PP_DMEKN
B0_PP_DMEKP
B1_ME1_BGBN
B1_ME1_BGBP
B0_ME1_BGBN
B0_ME1_BGBP
SEL_PP_DMEK
SEL_ME1_BGB
PP_DMEKN 001
PP_DMEKP 001
ME1_BGBN 001
ME1_BGBP 001

IC5103 MC10EP56DTR2
B0_ME1_SR1KP
B0_ME1_SR1KN
B1_ME1_SR1KP
B1_ME1_SR1KN
B0_ME1_FL1VP
B0_ME1_FL1VN
B1_ME1_FL1VP
B1_ME1_FL1VN
SEL_ME1_SR1K
SEL_ME1_FL1V
ME1_SR1KP 001
ME1_SR1KN 001
ME1_FL1VP 001
ME1_FL1VN 001

IC5104 MC10EP56DTR2
B1_PP_FL1VN
B1_PP_FL1VP
B0_PP_FL1VN
B0_PP_FL1VP
B1_PP_SR1KN
B1_PP_SR1KP
B0_PP_SR1KN
B0_PP_SR1KP
SEL_PP_FL1V
SEL_PP_SR1K
PP_FL1VN 001
PP_FL1VP 001
PP_SR1KN 001
PP_SR1KP 001

IC5105 MC10EP56DTR2
B0_DOUT24P
B0_DOUT24N
B1_DOUT24P
B1_DOUT24N
B0_DOUT23P
B0_DOUT23N
B1_DOUT23P
B1_DOUT23N
SEL_DOUT24
SEL_DOUT23
DOUT24P 001
DOUT24N 001
DOUT23P 001
DOUT23N 001

IC5106 MC10EP56DTR2
B1_DOUT11N
B1_DOUT11P
B0_DOUT11N
B0_DOUT11P
B1_DOUT12N
B1_DOUT12P
B0_DOUT12N
B0_DOUT12P
SEL_DOUT11
SEL_DOUT12
DOUT11N 001
DOUT11P 001
DOUT12N 001
DOUT12P 001

007, 018, 019, 020, 021, 023 — SEL

Cross Point Board
XPT-29 (22/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_22

XPT-29 (23/23)
SUFFIX: -11

016, 021, 022
017, 021, 022
B0_OUT
B1_OUT

IC5201
MC10EP56DTR2
B0_DOUT16P
B0_DOUT16N
B1_DOUT16P
B1_DOUT16N
DOUT16P 001
DOUT16N 001
B0_CCRIN1VP
B0_CCRIN1VN
B1_CCRIN1VP
B1_CCRIN1VN
CCRIN1VP 001
CCRIN1VN 001
SEL_DOUT16
SEL_CCRIN1V

IC5202
MC10EP56DTR2
B1_MYIN2VN
B1_MYIN2VP
B0_MYIN2VN
B0_MYIN2VP
MYIN2VN 001
MYIN2VP 001
B1_DOUT04N
B1_DOUT04P
B0_DOUT04N
B0_DOUT04P
DOUT04N 001
DOUT04P 001
SEL_MYIN2V
SEL_DOUT04


IC5203
MC10EP56DTR2
B0_ME1_UTIL1P
B0_ME1_UTIL1N
B1_ME1_UTIL1P
B1_ME1_UTIL1N
ME1_UTIL1P 001
ME1_UTIL1N 001
B0_ME1_EXTDMEP
B0_ME1_EXTDMEN
B1_ME1_EXTDMEP
B1_ME1_EXTDMEN
ME1_EXTDMEP 001
ME1_EXTDMEN 001
SEL_ME1_UTIL1
SEL_ME1_EXTDME

IC5204
MC10EP56DTR2
B1_PP_EXTDMEN
B1_PP_EXTDMEP
B0_PP_EXTDMEN
B0_PP_EXTDMEP
PP_EXTDMEN 001
PP_EXTDMEP 001
B1_ME1_BGAN
B1_ME1_BGAP
B0_ME1_BGAN
B0_ME1_BGAP
ME1_BGAN 001
ME1_BGAP 001
SEL_PP_EXTDME
SEL_ME1_BGA

IC5205
MC10EP56DTR2
B0_DOUT18P
B0_DOUT18N
B1_DOUT18P
B1_DOUT18N
DOUT18P 001
DOUT18N 001
B0_DOUT06P
B0_DOUT06N
B1_DOUT06P
B1_DOUT06N
DOUT06P 001
DOUT06N 001
SEL_DOUT18
SEL_DOUT06

007, 018, 019, 020, 021, 022
SEL

Cross Point Board
XPT-29 (23/23)
BOARD NO. 1-871-710-11
MVS-8000GSF_XPT-29_001_23

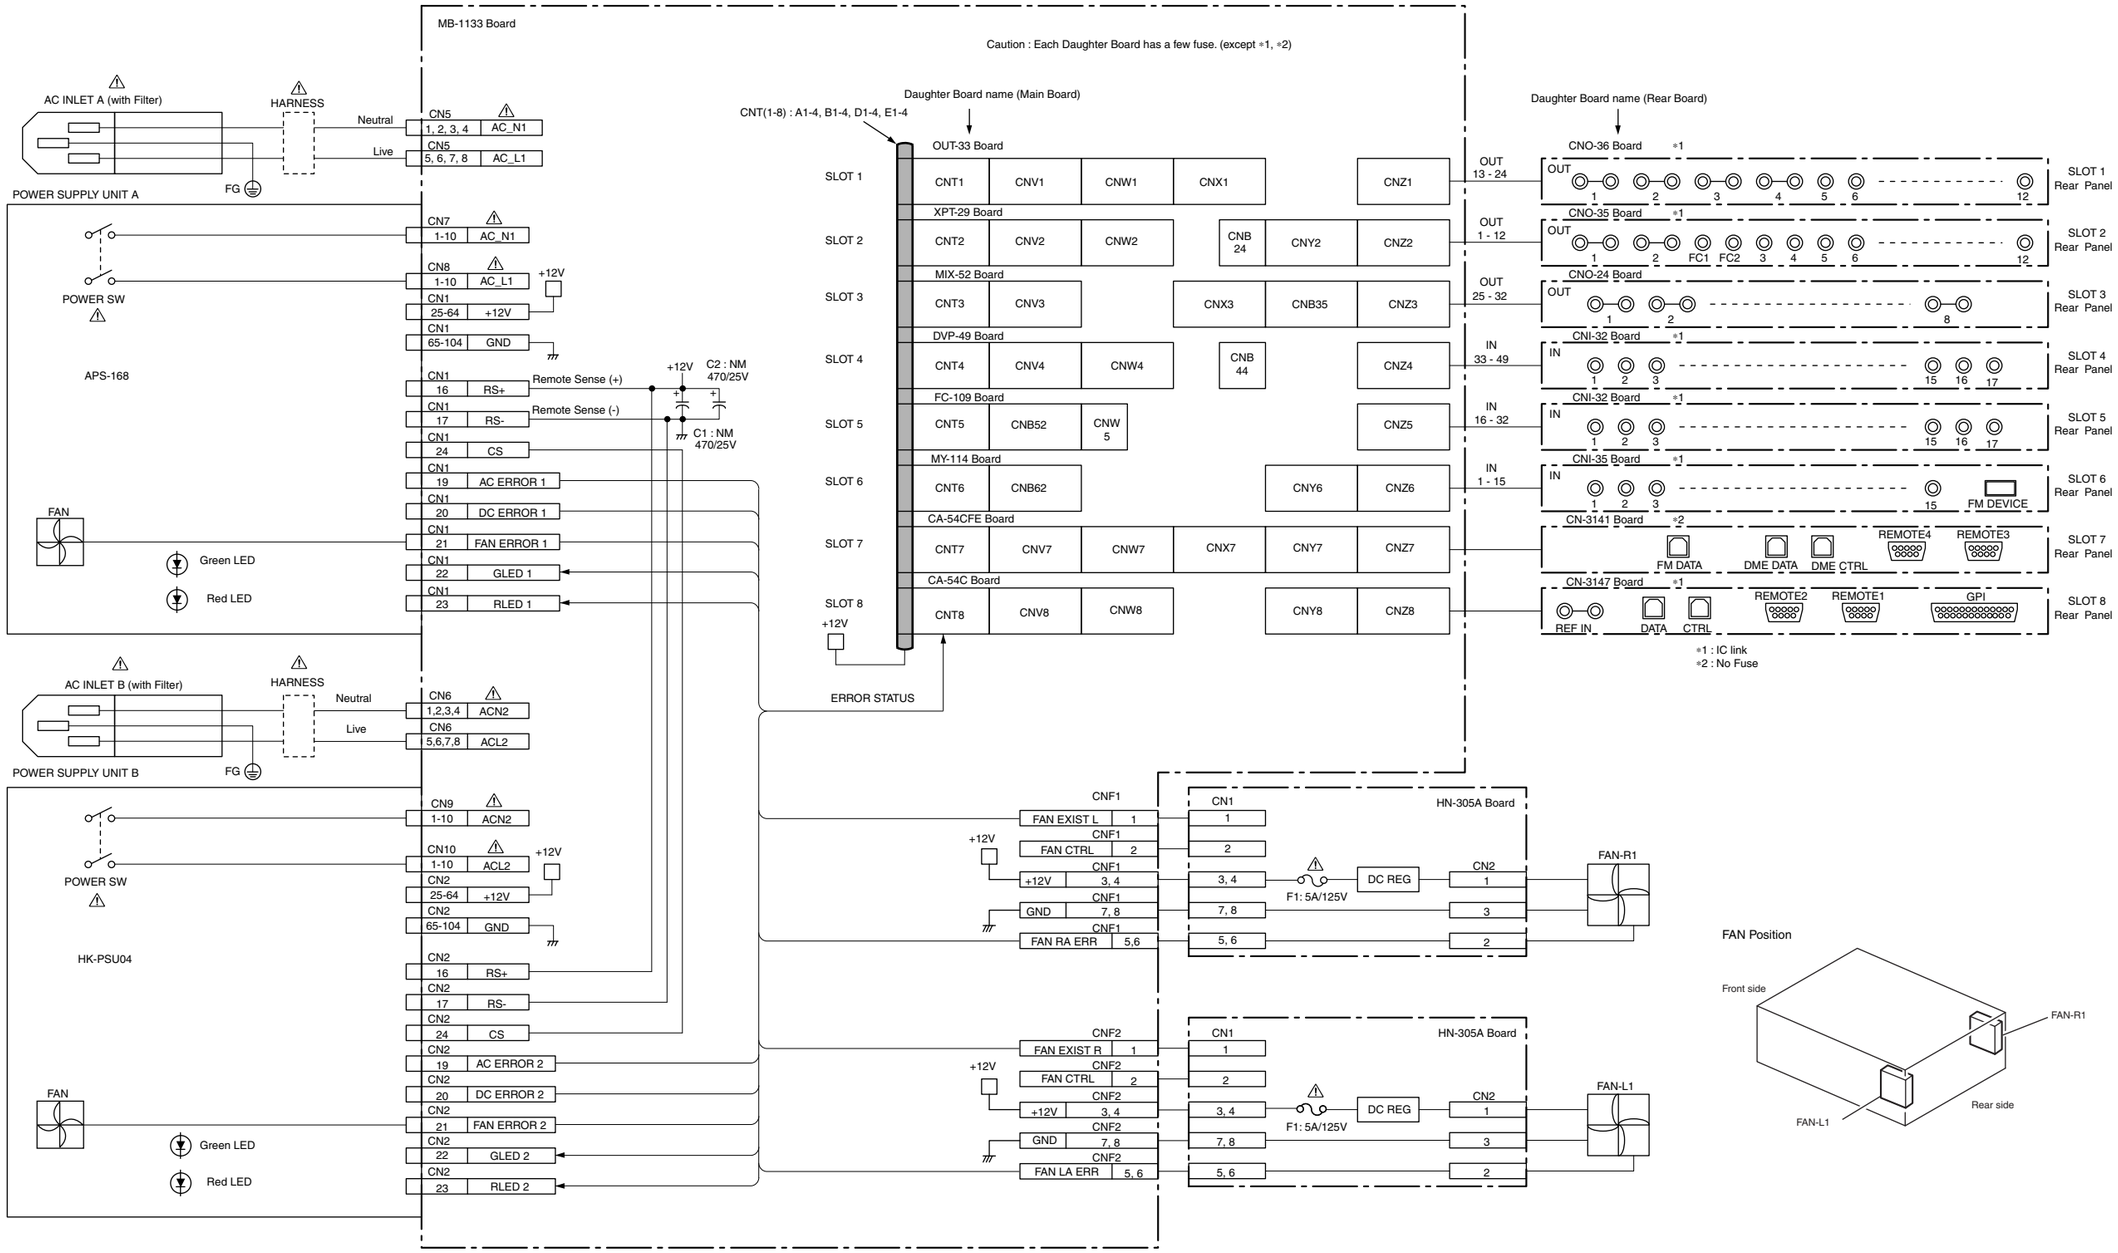
MB-1133 Board
Caution : Each Daughter Board has a few fuse. (except ∗1, ∗2)
Daughter Board name (Main Board)
CNT(1-8) : A1-4, B1-4, D1-4, E1-4
Daughter Board name (Rear Board)
AC INLET A (with Filter)
HARNESS
Neutral
Live
FG
POWER SUPPLY UNIT A
POWER SW
APS-168
FAN
Green LED
Red LED
+12V
Remote Sense (+)
Remote Sense (-)
C2 : NM 470/25V
C1 : NM 470/25V
AC INLET B (with Filter)
POWER SUPPLY UNIT B
HK-PSU04
OUT-33 Board
XPT-29 Board
MIX-52 Board
DVP-49 Board
FC-109 Board
MY-114 Board
CA-54CFE Board
CA-54C Board
ERROR STATUS
CNO-36 Board
CNO-35 Board
CNO-24 Board
CNI-32 Board
CNI-35 Board
CN-3141 Board
CN-3147 Board
FM DATA
DME DATA
DME CTRL
REMOTE4
REMOTE3
REMOTE2
REMOTE1
GPI
REF IN
DATA
CTRL
FM DEVICE
∗1 : IC link
∗2 : No Fuse
HN-305A Board
DC REG
F1: 5A/125V
FAN-R1
FAN-L1
FAN Position
Front side
Rear side

Section 5
Board Layouts


Index

Board Name		Page
CA-54		5-3
CN-3141		5-6
CN-3147		5-8
CNI-32		5-10
CNI-35		5-12
CNO-24		5-14
CNO-35		5-16
CNO-36		5-18
DIF-184		5-21
DVP-49		5-22
FC-109	SUFFIX: -11	5-26
	SUFFIX: -12	5-26 (a)
HN-305		5-31
IF-937		5-31
MB-1133		5-32
MIX-52		5-34
MY-114		5-39
OUT-33		5-44
SG-272		5-48
SIO-26		5-49
XPT-29		5-50


CA-54 (1-686-445-24)
---
*:B SIDE

| | | |


Components locations list; previous page

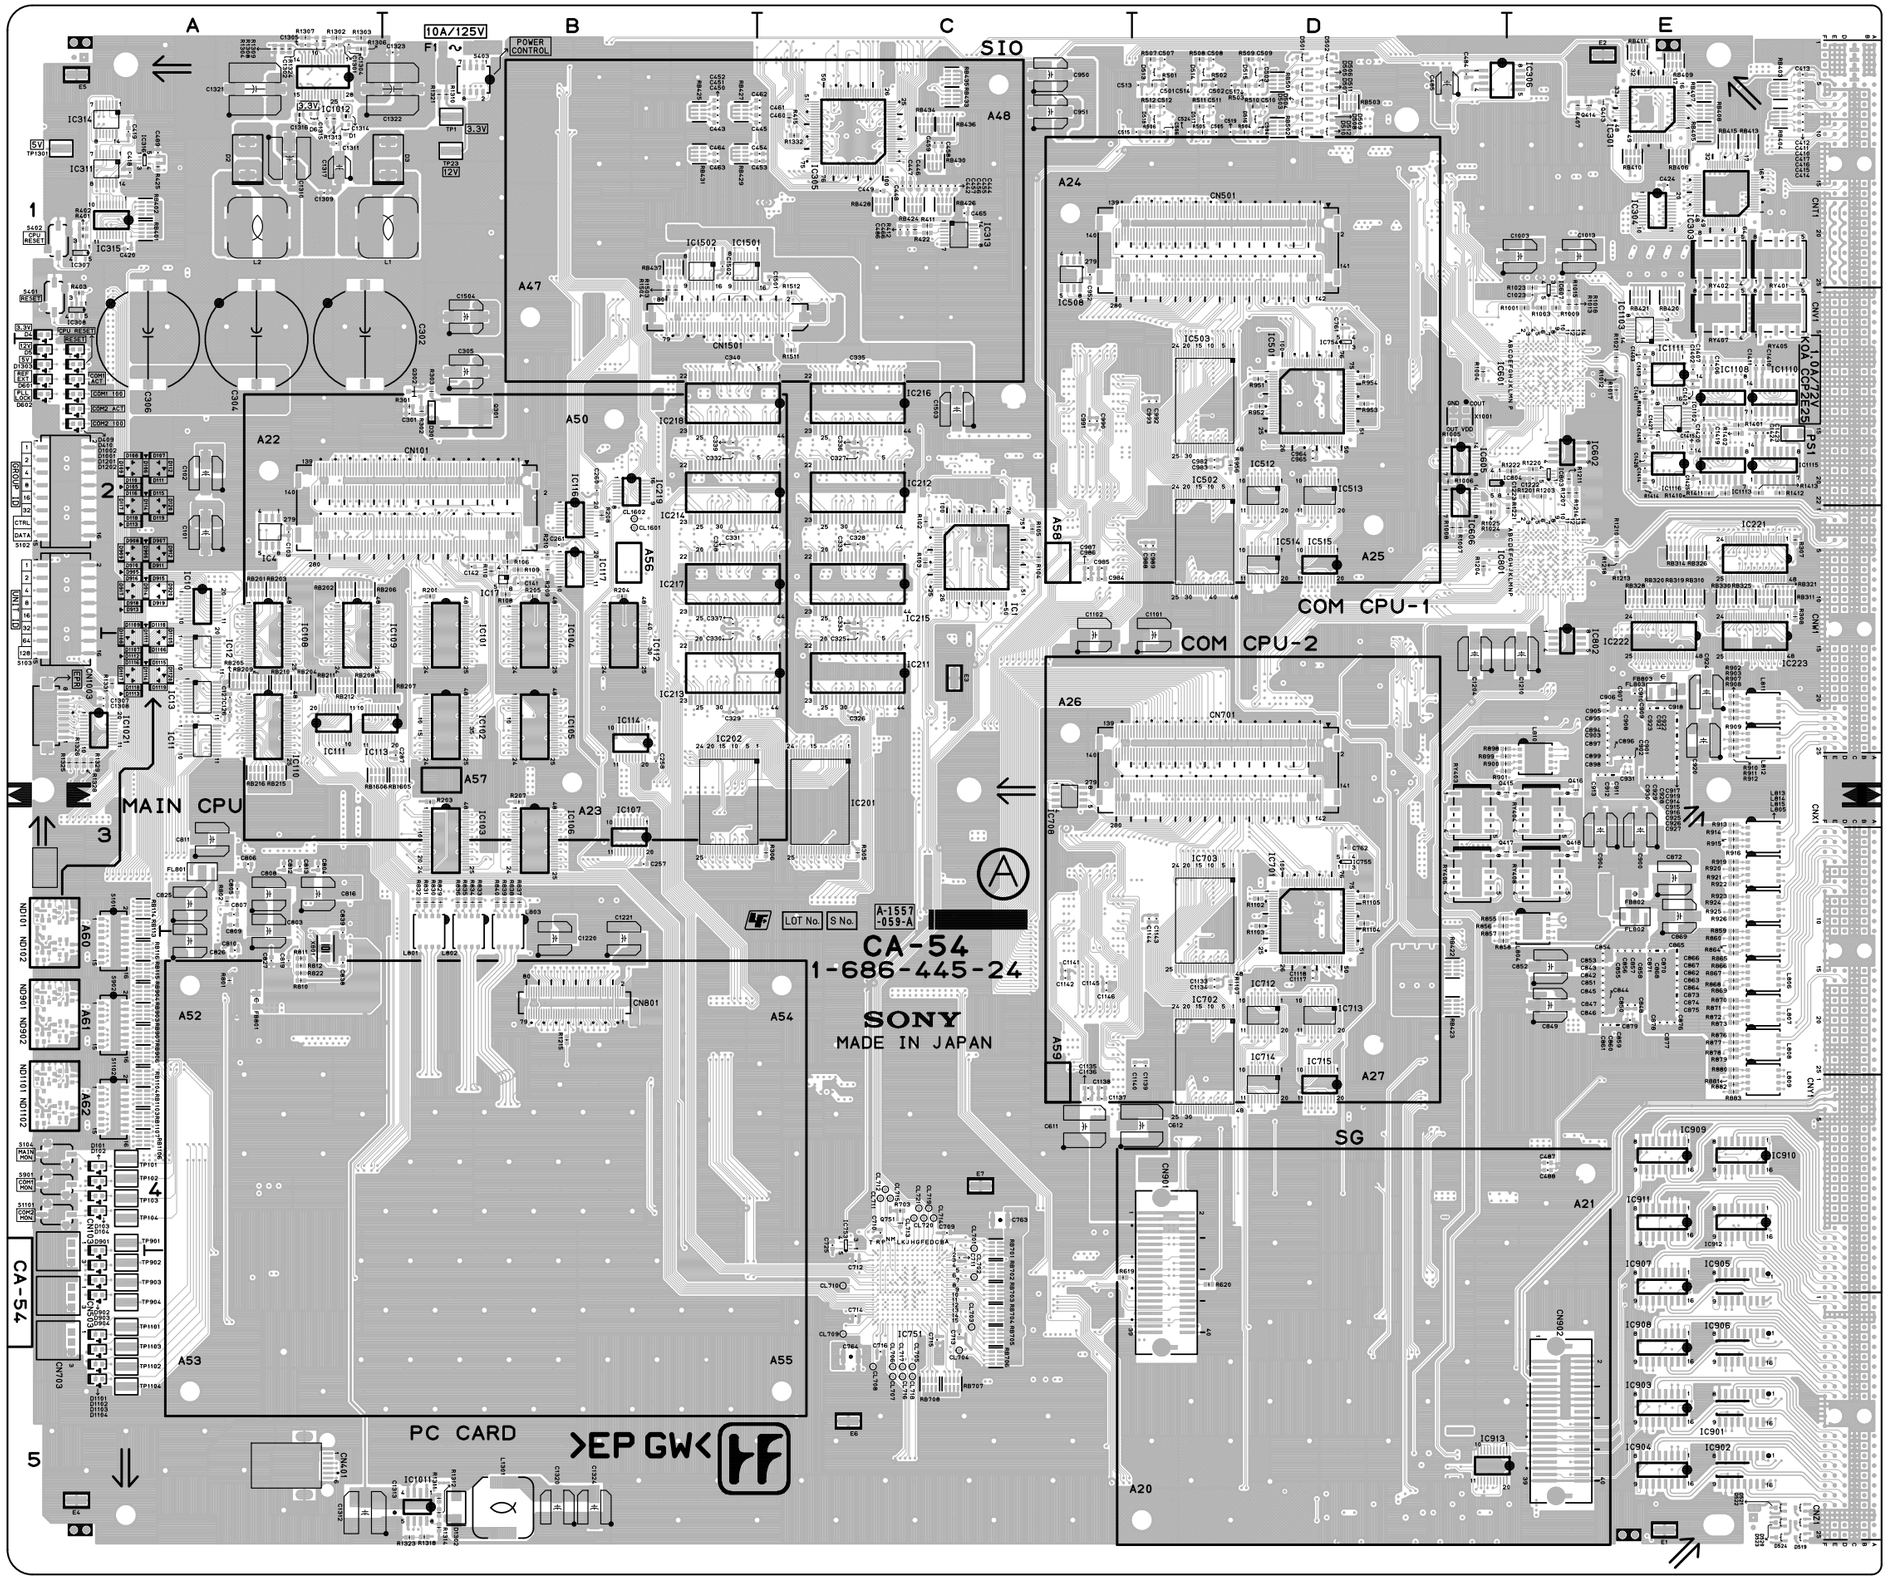

CA-54 -A SIDE-
SUFFIX: -24

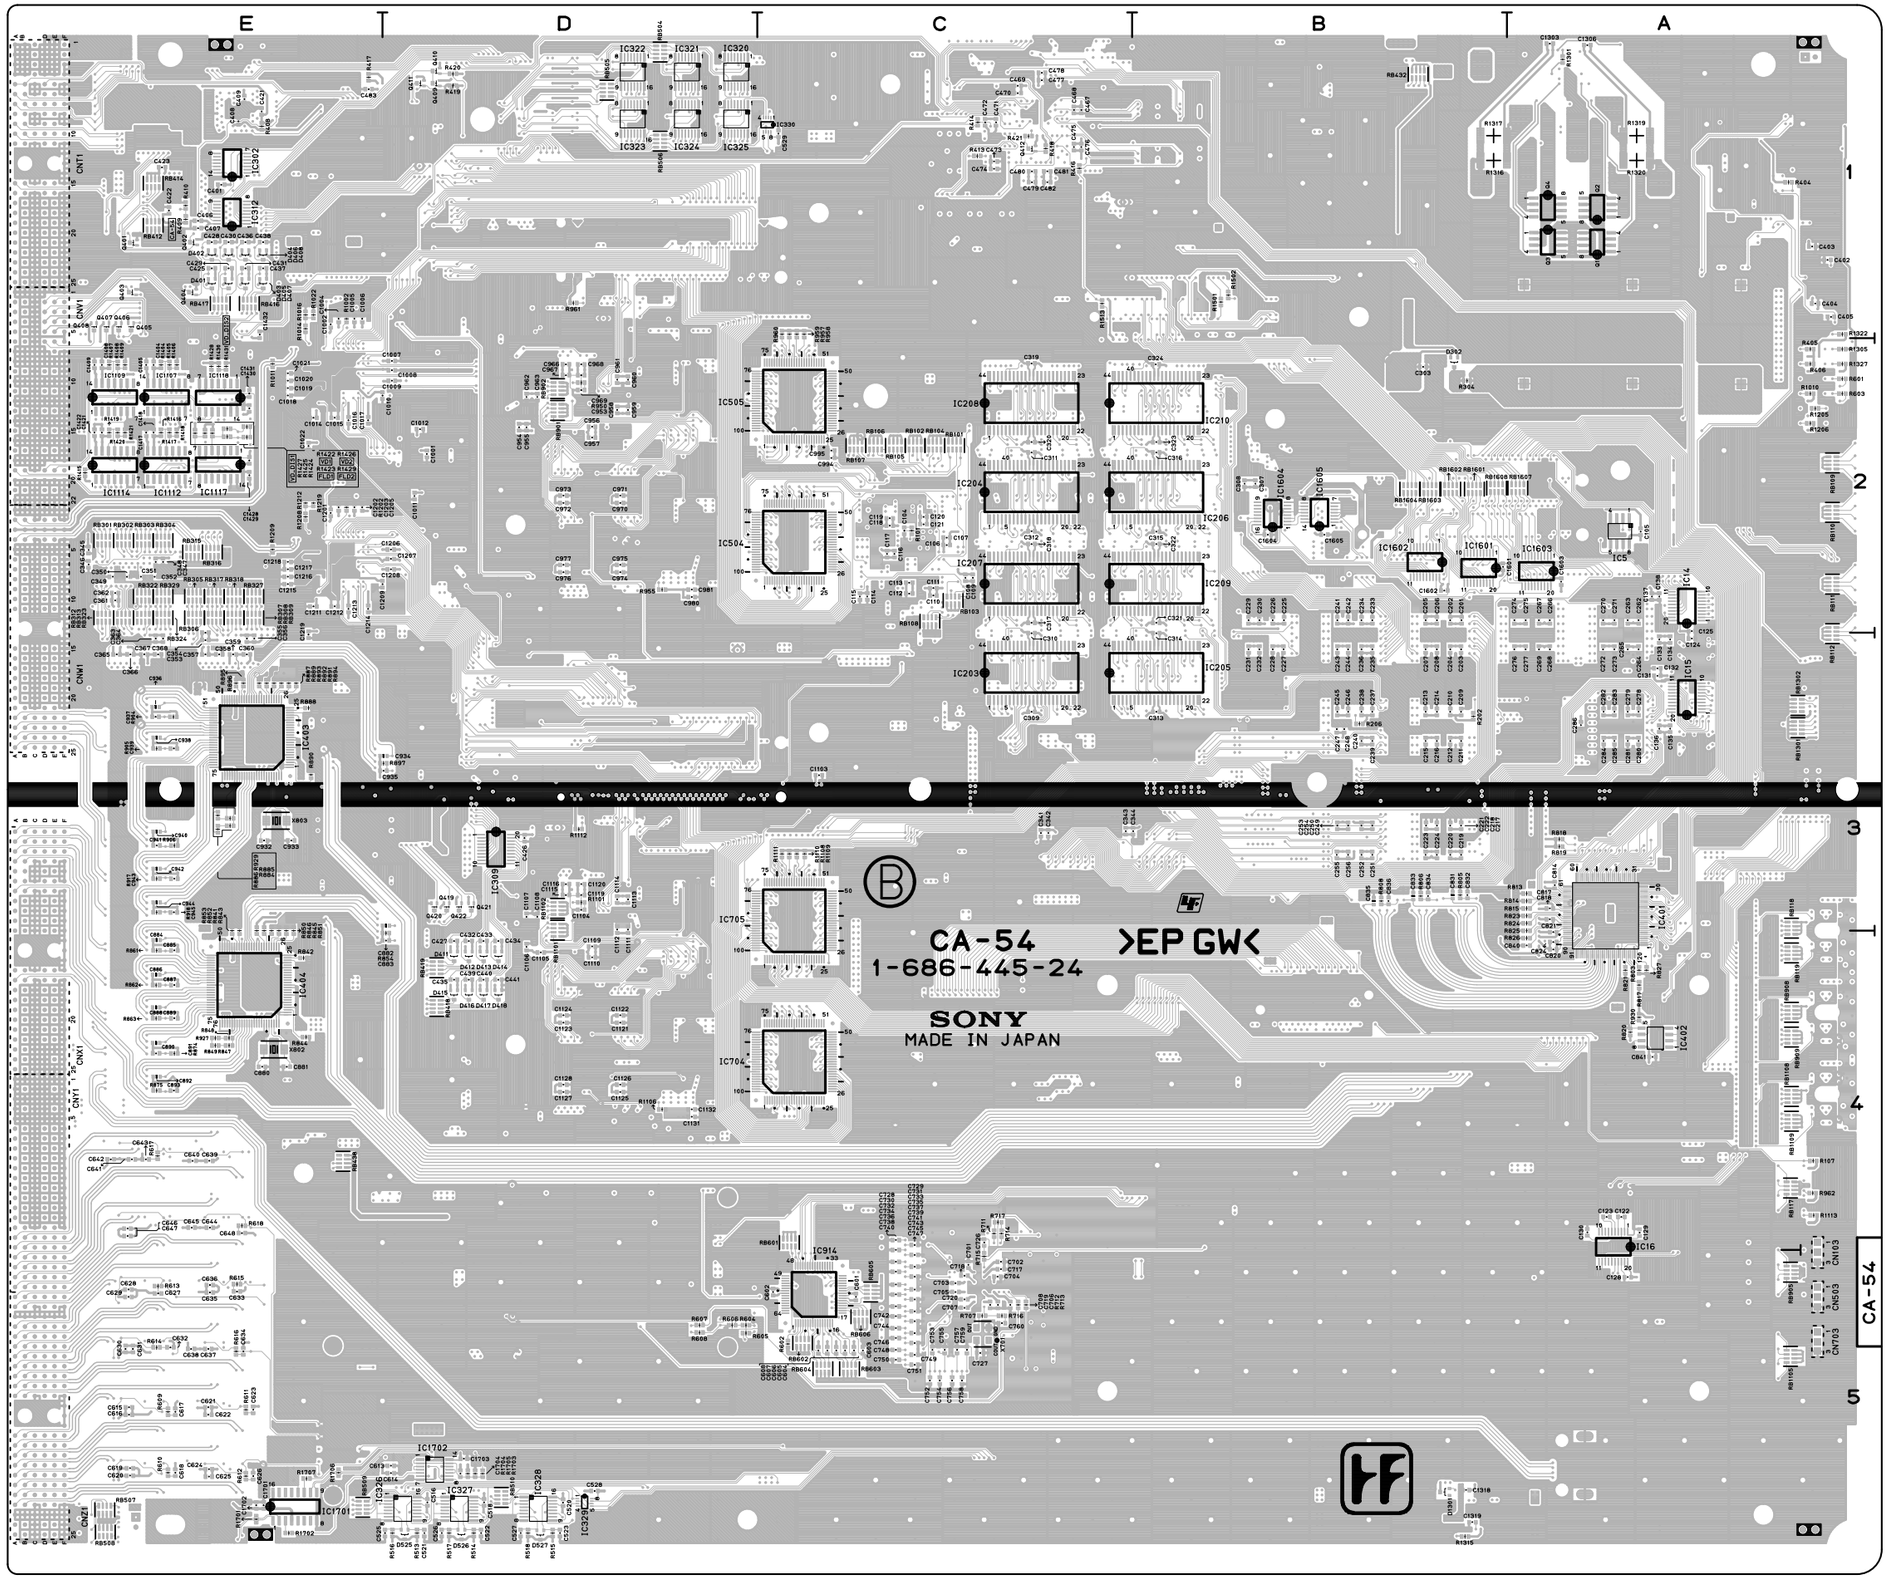


CA-54 -B SIDE-
SUFFIX: -24

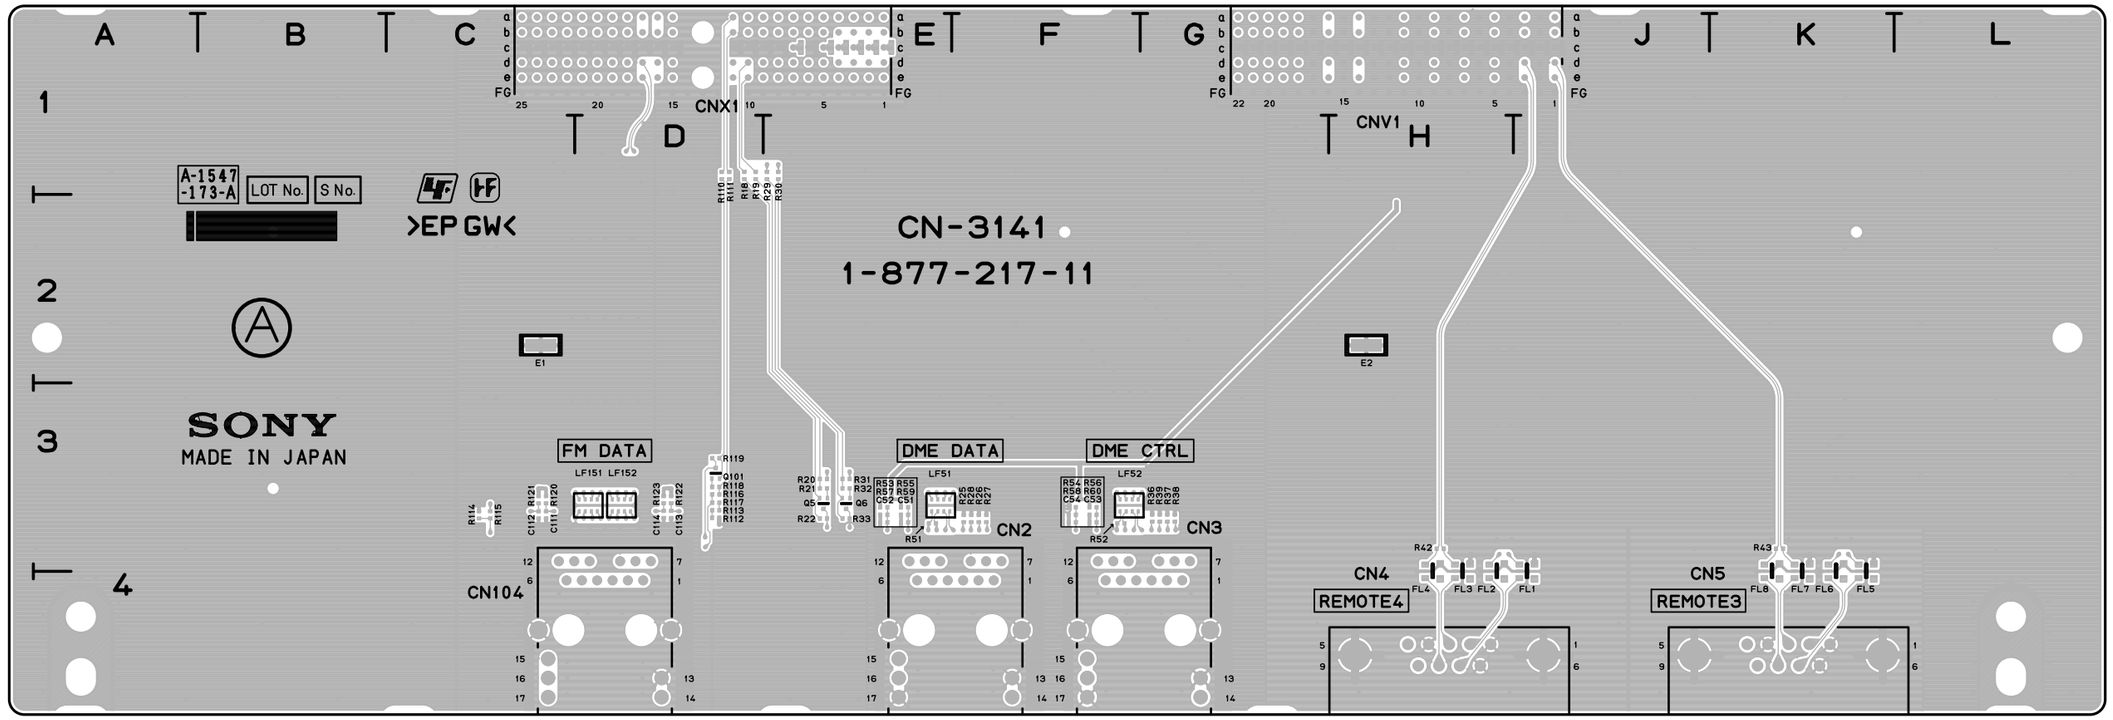


CN-3141 -A SIDE-
SUFFIX: -11

CN-3141 (1-877-217-11)

C51	E3	FL8	K4	R39	G3
C52	E3			R42	H3
C53	F3	LF51	E3	R43	K3
C54	F3	LF52	F3	R51	E3
C111	C3	LF151	D3	R52	F3
C112	C3	LF152	D3	R53	E3
C113	D3			R54	F3
C114	D3	Q5	E3	R55	E3
		Q6	E3	R56	F3
CN2	E4	Q101	D3	R57	E3
CN3	F4			R58	F3
CN4	H4	R18	D1	R59	E3
CN5	K4	R19	D1	R60	F3
CN104	C4	R20	E3	R110	D1
		R21	E3	R111	D1
CNV1	H1	R22	E3	R112	D3
CNX1	D1	R25	F3	R113	D3
		R26	F3	R114	C3
E1	C2	R27	F3	R115	C3
E2	H2	R28	F3	R116	D3
		R29	E1	R117	D3
FL1	J4	R30	E1	R118	D3
FL2	H4	R31	E3	R119	D3
FL3	H4	R32	E3	R120	C3
FL4	H4	R33	E3	R121	C3
FL5	K4	R36	G3	R122	D3
FL6	K4	R37	G3	R123	D3
FL7	K4	R38	G3		

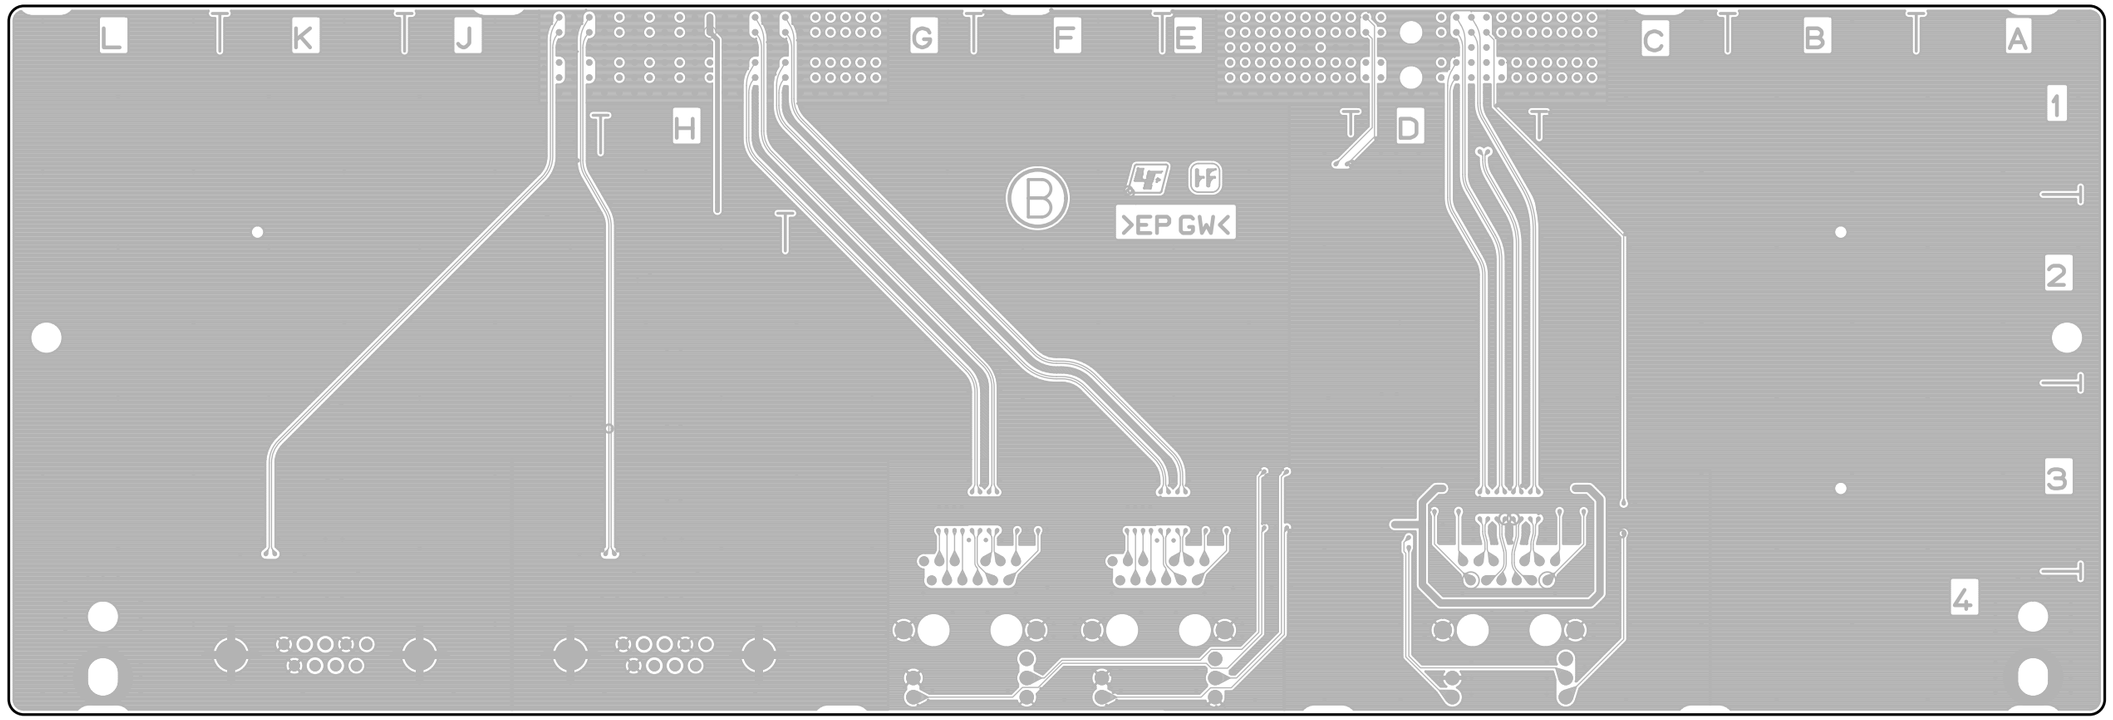


CN-3141 -B SIDE-
SUFFIX: -11

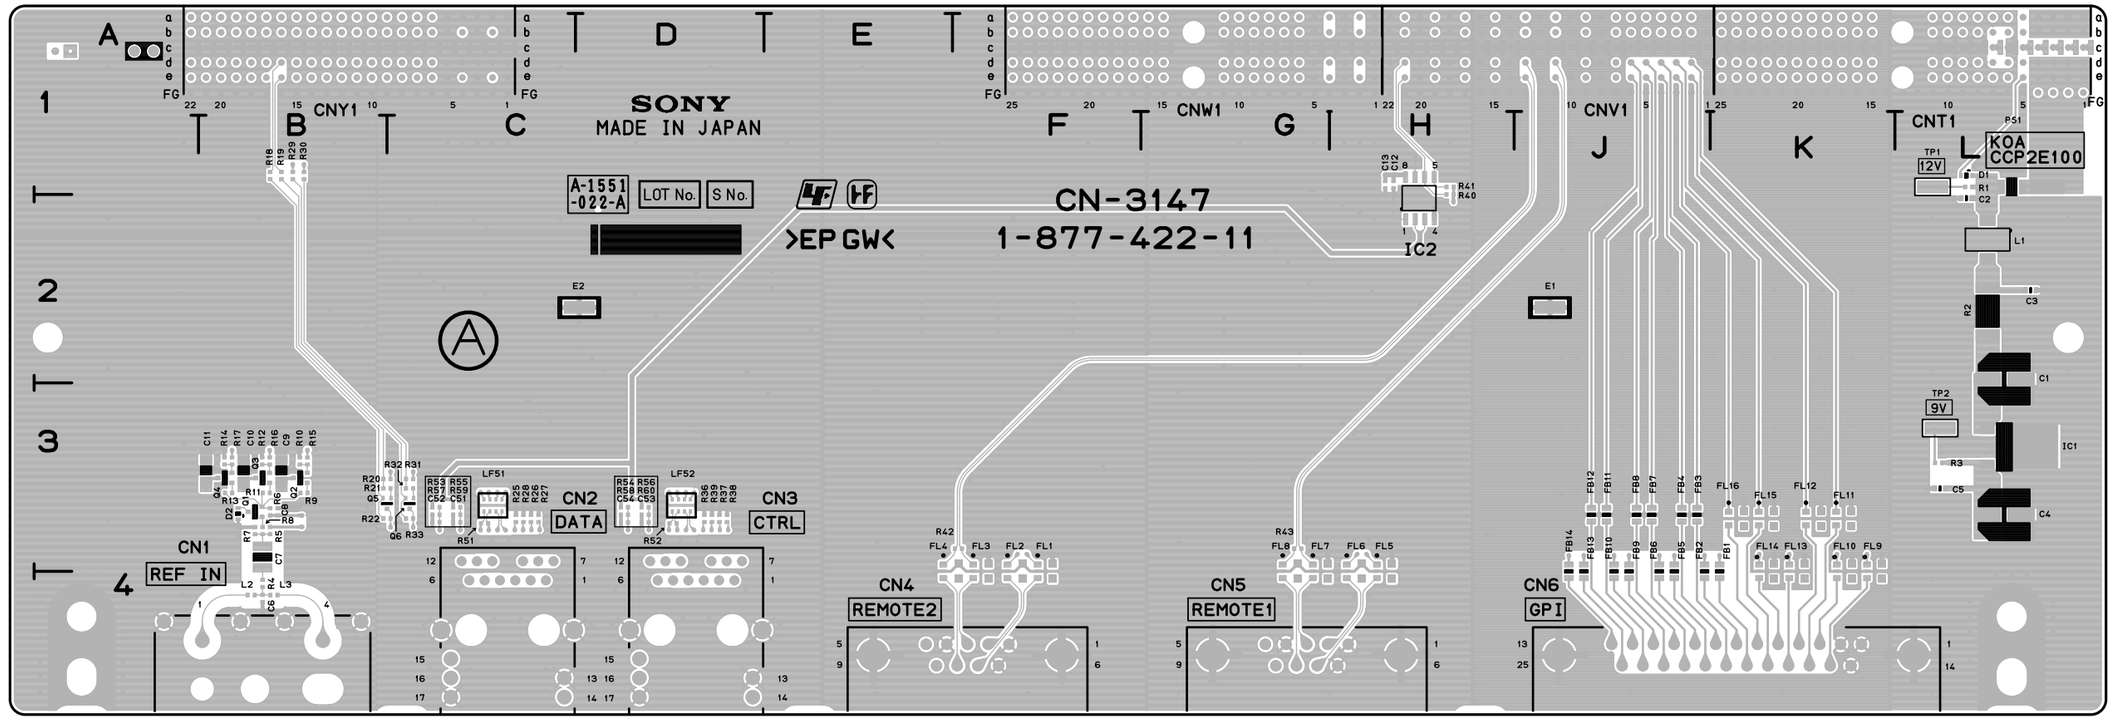


CN-3147 -A SIDE-
SUFFIX: -11

CN-3147 (1-877-422-11)

C1	L2	FB1	K3	L1	L2	R20	C3
C2	L2	FB2	J3	L2	B4	R21	C3
C3	L2	FB3	J3	L3	B4	R22	C3
C4	L3	FB4	J3			R25	C3
C5	L3	FB5	J3	LF51	C3	R26	C3
C6	B4	FB6	J3	LF52	D3	R27	C3
C7	B3	FB7	J3			R28	C3
C8	B3	FB8	J3	PS1	L1	R29	B1
C9	B3	FB9	J3			R30	B1
C10	B3	FB10	J3	Q1	B3	R31	C3
C11	B3	FB11	J3	Q2	B3	R32	C3
C12	H1	FB12	J3	Q3	B3	R33	C3
C13	H1	FB13	J3	Q4	B3	R36	D3
C51	C3	FB14	J3	Q5	C3	R37	D3
C52	C3			Q6	C3	R38	D3
C53	D3	FL1	F3			R39	D3
C54	D3	FL2	F3	R1	L1	R40	H1
		FL3	F3	R2	L2	R41	H1
CN1	B4	FL4	E3	R3	L3	R42	F3
CN2	C4	FL5	H3	R4	B4	R43	G3
CN3	D4	FL6	H3	R5	B3	R51	C3
CN4	F4	FL7	G3	R6	B3	R52	D3
CN5	G4	FL8	G3	R7	B3	R53	C3
CN6	K4	FL9	K3	R8	B3	R54	D3
		FL10	K3	R9	B3	R55	C3
CNT1	L1	FL11	K3	R10	B3	R56	D3
CNV1	J1	FL12	K3	R11	B3	R57	C3
CNW1	G1	FL13	K3	R12	B3	R58	D3
CNY1	B1	FL14	K3	R13	B3	R59	C3
		FL15	K3	R14	B3	R60	D3
D1	L1	FL16	K3	R15	B3		
D2	B3			R16	B3	TP1	L1
		IC1	L3	R17	B3	TP2	L3
E1	J2	IC2	H2	R18	B1		
E2	D2			R19	B1		

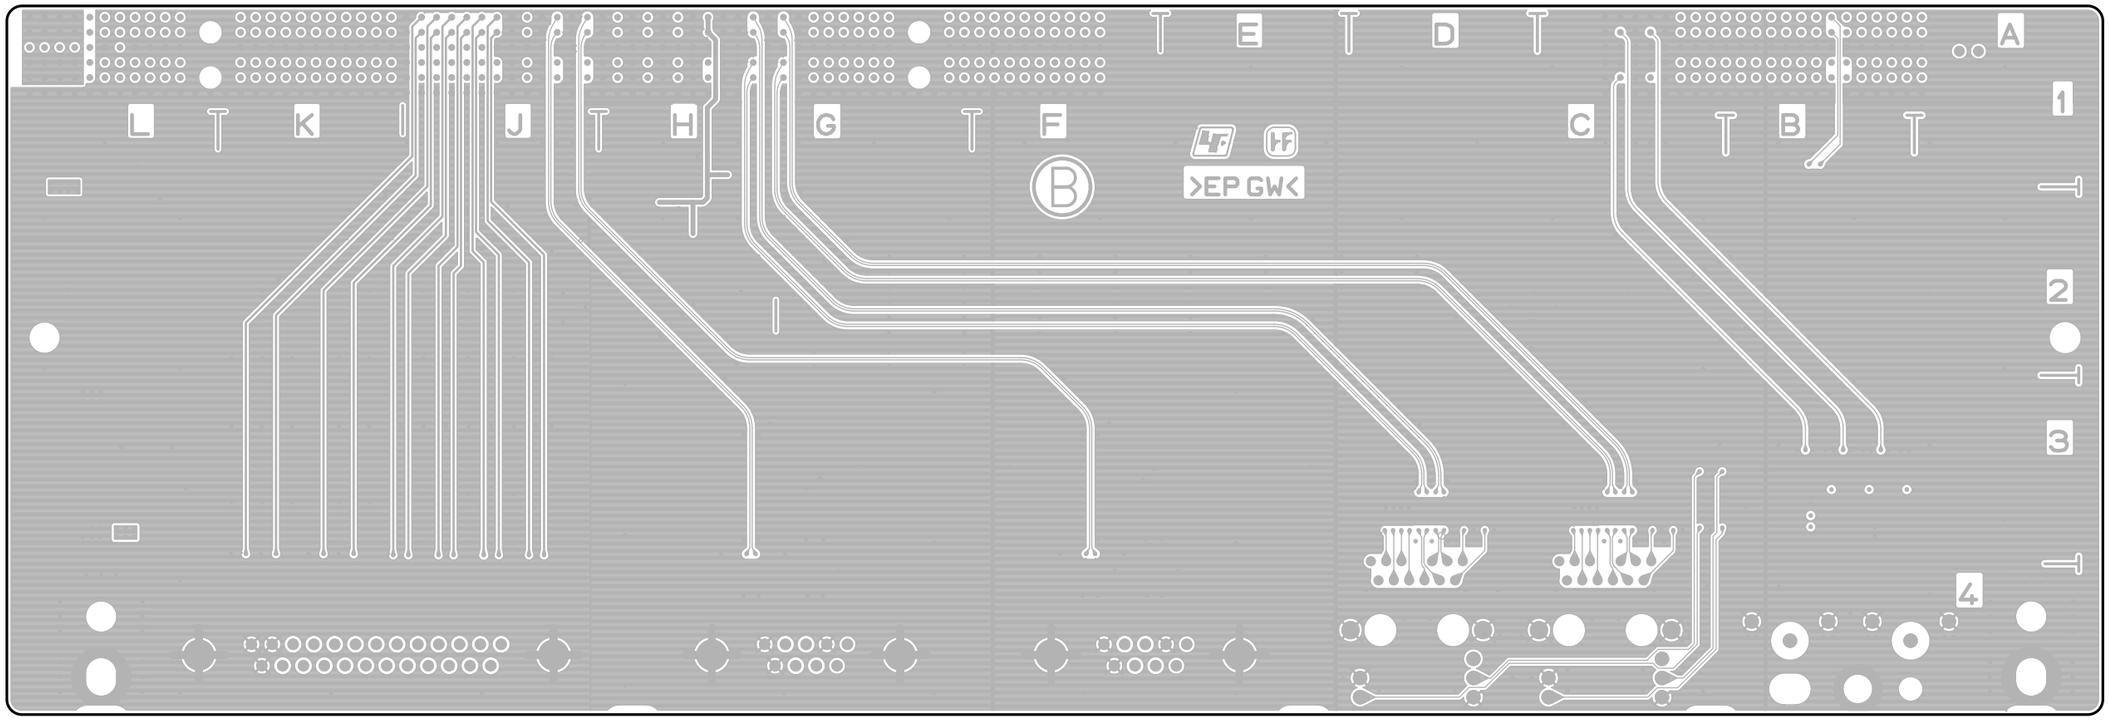


CN-3147 -B SIDE-
SUFFIX: -11

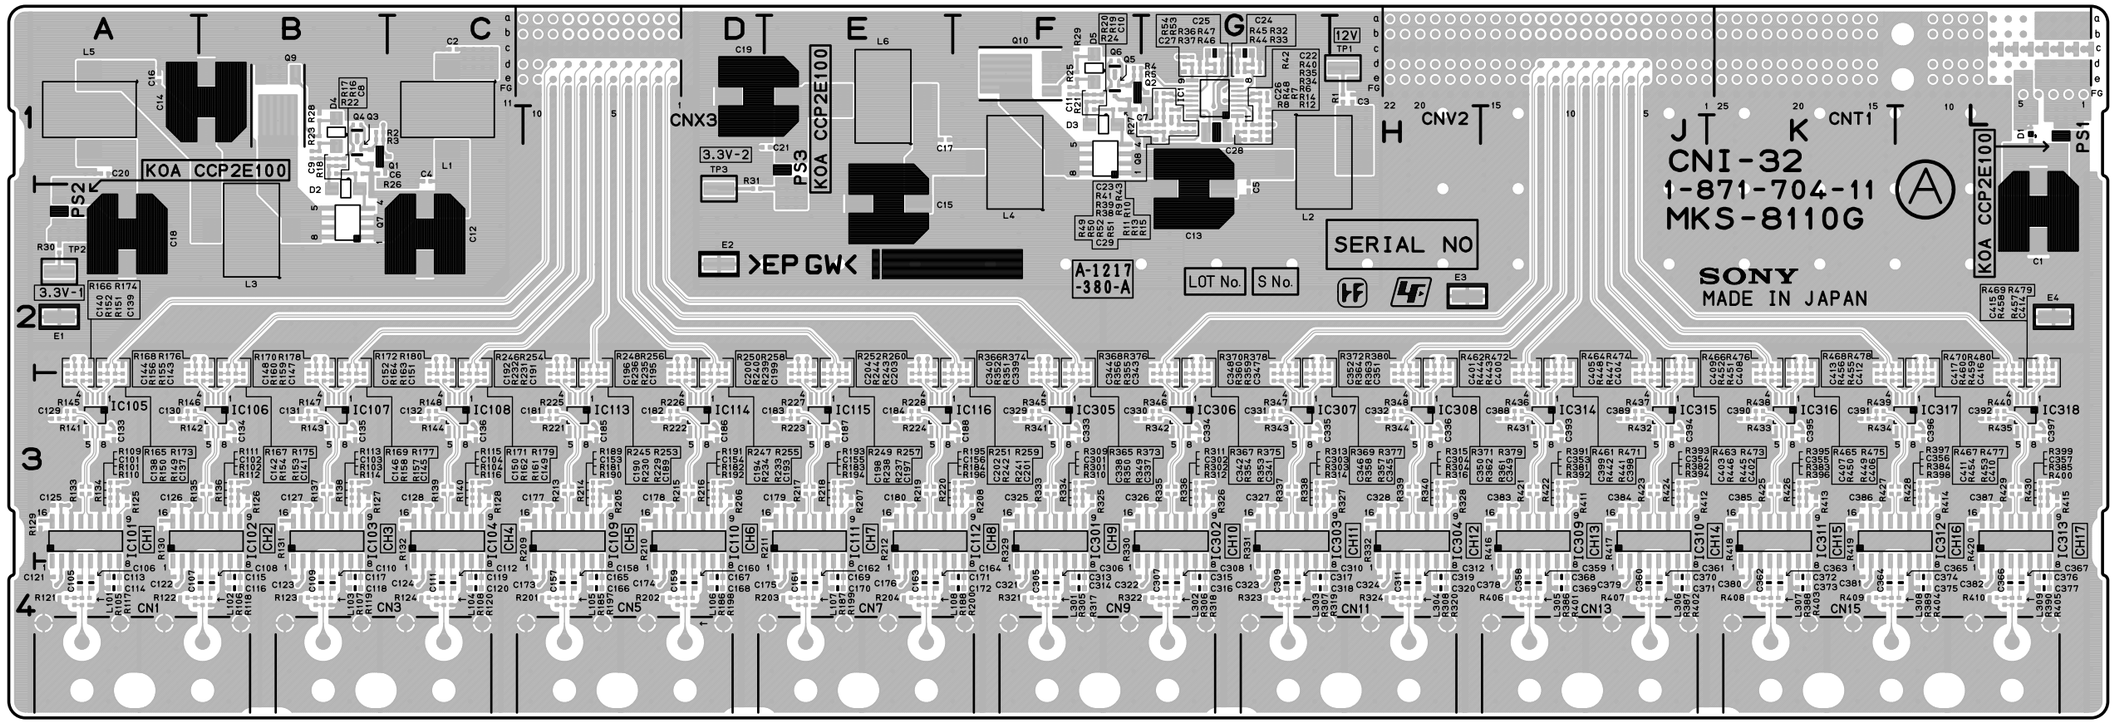

CNI-32 -A SIDE-
SUFFIX: -11

CNI-32 (1-871-704-11)


C1	L2	C108	B4	C144	A3	C180	E3	C312	H4	C348	G3	C384	J3	CN3	B4	IC113	D3	L108	E4	R11	G1	R47	G1	R129	A3	R165	A2	R201	D4	R237	E3
C2	C1	C109	B4	C145	B3	C181	D3	C313	F4	C349	H3	C385	K3	CN5	D4	IC114	D3	L301	F4	R12	G1	R48	G1	R130	A3	R166	A2	R202	D4	R238	E3
C3	H1	C110	B4	C146	B3	C182	D3	C314	F4	C350	H3	C386	K3	CN7	E4	IC115	E3	L302	G4	R13	G1	R49	F1	R131	B3	R167	B2	R203	E4	R239	E3
C4	C1	C111	C4	C147	B3	C183	E3	C315	G4	C351	H3	C387	L3	CN9	F4	IC116	E3	L303	G4	R14	G1	R50	G1	R132	C3	R168	A2	R204	E4	R240	E3
C5	G2	C112	C4	C148	B3	C184	E3	C316	G4	C352	H3	C388	J3	CN11	H4	IC301	F3	L304	H4	R15	G1	R51	G1	R133	A3	R169	B2	R205	D3	R241	F3
C6	B1	C113	A4	C149	C3	C185	D3	C317	G4	C353	J3	C389	J3	CN13	J4	IC302	G3	L305	J4	R16	B1	R52	G1	R134	A3	R170	B2	R206	D3	R242	E3
C7	F1	C114	A4	C150	C3	C186	D3	C318	G4	C354	J3	C390	K3	CN15	K4	IC303	G3	L306	J4	R17	B1	R53	G1	R135	B3	R171	C2	R207	E3	R243	E3
C8	B1	C115	B4	C151	C3	C187	E3	C319	H4	C355	K3	C391	K3			IC304	H3	L307	K4	R18	B1	R54	G1	R136	B3	R172	C2	R208	F3	R244	E3
C9	B1	C116	B4	C152	C3	C188	F3	C320	H4	C356	L3	C392	L3	CNT1	L1	IC305	F3	L308	K4	R19	F1	R101	A3	R137	B3	R173	A2	R209	C3	R245	D2
C10	F1	C117	B4	C153	D3	C189	D3	C321	F4	C357	L3	C393	J3	CNV2	J1	IC306	G3	L309	L4	R20	F1	R102	B3	R138	B3	R174	A2	R210	D3	R246	D2
C11	F1	C118	B4	C154	D3	C190	D3	C322	G4	C358	J4	C394	J3	CNX3	D1	IC307	G3			R21	F1	R103	B3	R139	C3	R175	B2	R211	D3	R247	D2
C12	C2	C119	C4	C155	E3	C191	D3	C323	G4	C359	J4	C395	K3			IC308	H3	PS1	L1	R22	B1	R104	C3	R140	C3	R176	B2	R212	E3	R248	D2
C13	G2	C120	C4	C156	F3	C192	D3	C324	H4	C360	J4	C396	L3	D1	L1	IC309	J3	PS2	A2	R23	B1	R105	A4	R141	A3	R177	B2	R213	D3	R249	E2
C14	B1	C121	A4	C157	D4	C193	D3	C325	F3	C361	J4	C397	L3	D2	B2	IC310	J3	PS3	E1	R24	F1	R106	B4	R142	A3	R178	B2	R214	D3	R250	E2
C15	E2	C122	A4	C158	D4	C194	D3	C326	G3	C362	K4	C398	J3	D3	F1	IC311	K3			R25	F1	R107	B4	R143	B3	R179	C2	R215	D3	R251	E2
C16	A1	C123	B4	C159	D4	C195	D3	C327	G3	C363	K4	C399	J3	D4	B1	IC312	K3	Q1	B1	R26	B1	R108	C4	R144	C3	R180	C2	R216	D3	R252	E2
C17	E1	C124	C4	C160	D4	C196	D3	C328	H3	C364	K4	C400	J3	D5	F1	IC313	L3	Q2	F1	R27	F1	R109	A3	R145	A3	R181	D3	R217	E3	R253	D2
C18	A2	C125	A3	C161	E4	C197	E3	C329	F3	C365	L4	C401	J3			IC314	J3	Q3	B1	R28	B1	R110	A3	R146	A3	R182	D3	R218	E3	R254	D2
C19	D1	C126	A3	C162	E4	C198	E3	C330	F3	C366	L4	C402	J3	E1	A2	IC315	J3	Q4	B1	R29	F1	R111	B3	R147	B3	R183	E3	R219	E3	R255	D2
C20	A1	C127	B3	C163	E4	C199	E3	C331	G3	C367	L4	C403	J3	E2	D2	IC316	K3	Q5	F1	R30	A2	R112	B3	R148	C3	R184	F3	R220	E3	R256	D2
C21	E1	C128	C3	C164	E4	C200	E3	C332	H3	C368	J4	C404	J3	E3	H2	IC317	L3	Q6	F1	R31	D2	R113	B3	R149	A3	R185	D4	R221	D3	R257	E2
C22	G1	C129	A3	C165	D4	C201	F3	C333	F3	C369	J4	C405	J3	E4	L2	IC318	L3	Q7	B2	R32	G1	R114	B3	R150	A3	R186	D4	R222	D3	R258	E2
C23	G1	C130	A3	C166	D4	C202	E3	C334	G3	C370	J4	C406	K3					Q8	F1	R33	G1	R115	C3	R151	A3	R187	E4	R223	E3	R259	F2
C24	G1	C131	B3	C167	D4	C203	E3	C335	G3	C371	J4	C407	K3	IC1	G1	L1	C1	Q9	B1	R34	G1	R116	C3	R152	A3	R188	E4	R224	E3	R260	E2
C25	G1	C132	C3	C168	D4	C204	E3	C336	H3	C372	K4	C408	K3	IC101	A3	L2	G1	Q10	F1	R35	G1	R117	A4	R153	B3	R189	D3	R225	D3	R301	F3
C26	G1	C133	A3	C169	E4	C301	F3	C337	F3	C373	K4	C409	K3	IC102	B3	L3	B2			R36	G1	R118	B4	R154	B3	R190	D3	R226	D3	R302	G3
C27	G1	C134	B3	C170	E4	C302	G3	C338	F3	C374	L4	C410	L3	IC103	B3	L4	F1	R1	H1	R37	G1	R119	B4	R155	B3	R191	D3	R227	E3	R303	G3
C28	G1	C135	B3	C171	F4	C303	G3	C339	F3	C375	L4	C411	L3	IC104	C3	L5	A1	R2	B1	R38	G1	R120	C4	R156	A3	R192	D3	R228	E3	R304	H3
C29	G1	C136	C3	C172	F4	C304	H3	C340	F3	C376	L4	C412	L3	IC105	A3	L6	E1	R3	B1	R39	G1	R121	A4	R157	B3	R193	E3	R229	D3	R305	F4
C101	A3	C137	A3	C173	D4	C305	F4	C341	G3	C377	L4	C413	K3	IC106	B3	L101	A4	R4	F1	R40	G1	R122	A4	R158	B3	R194	E3	R230	D3	R306	G4
C102	B3	C138	A3	C174	D4	C306	F4	C342	G3	C378	J4	C414	L3	IC107	B3	L102	A4	R5	F1	R41	G1	R123	B4	R159	B3	R195	F3	R231	D3	R307	G4
C103	B3	C139	A3	C175	E4	C307	G4	C343	G3	C379	J4	C415	L3	IC108	C3	L103	B4	R6	G1	R42	G1	R124	C4	R160	B3	R196	F3	R232	D3	R308	H4
C104	C3	C140	A3	C176	E4	C308	G4	C344	G3	C380	K4	C416	L3	IC109	D3	L104	C4	R7	G1	R43	G1	R125	A3	R161	C3	R197	D4	R233	D3	R309	F3
C105	A4	C141	B3	C177	D3	C309	G4	C345	G3	C381	K4	C417	L3	IC110	D3	L105	D4	R8	G1	R44	G1	R126	B3	R162	C3	R198	D4	R234	D3	R310	F3
C106	A4	C142	B3	C178	D3	C310	G4	C346	G3	C382	L4			IC111	E3	L106	D4	R9	G1	R45	G1	R127	B3	R163	C3	R199	E4	R235	D3	R311	G3
C107	B4	C143	B3	C179	E3	C311	H4	C347	G3	C383	J3	CN1	A4	IC112	E3	L107	E4	R10	G1	R46	G1	R128	C3	R164	C3	R200	E4	R236	D3	R312	G3

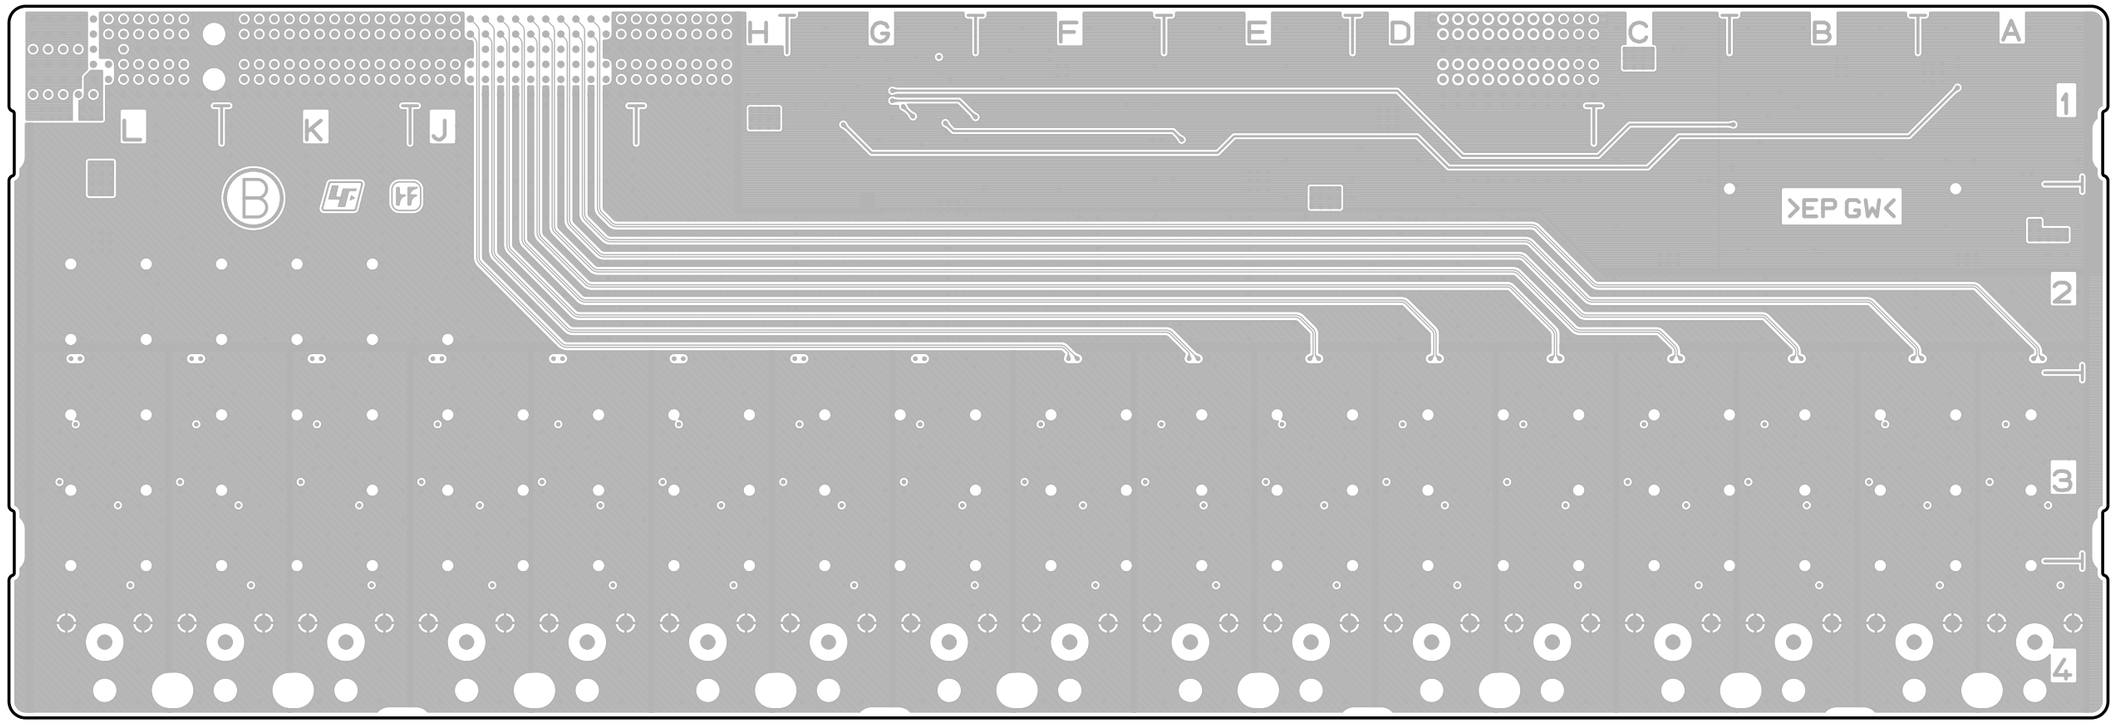

CNI-32 -B SIDE-

SUFFIX: -11


R313	G3	R349	F3	R385	L3	R421	J3	R457	L3
R314	G3	R350	F3	R386	J4	R422	J3	R458	L3
R315	H3	R351	F3	R387	J4	R423	J3	R459	L3
R316	H3	R352	F3	R388	K4	R424	J3	R460	L3
R317	F4	R353	G3	R389	K4	R425	K3	R461	J2
R318	G4	R354	G3	R390	L4	R426	K3	R462	J2
R319	G4	R355	G3	R391	J3	R427	K3	R463	J2
R320	H4	R356	G3	R392	J3	R428	L3	R464	J2
R321	F4	R357	G3	R393	J3	R429	L3	R465	K2
R322	G4	R358	G3	R394	J3	R430	L3	R466	K2
R323	G4	R359	G3	R395	K3	R431	J3	R467	L2
R324	H4	R360	G3	R396	K3	R432	J3	R468	K2
R325	F3	R361	H3	R397	L3	R433	K3	R469	L2
R326	G3	R362	H3	R398	L3	R434	K3	R470	L2
R327	H3	R363	H3	R399	L3	R435	L3	R471	J2
R328	H3	R364	H3	R400	L3	R436	J3	R472	J2
R329	F3	R365	F2	R401	J4	R437	J3	R473	J2
R330	F3	R366	F2	R402	J4	R438	K3	R474	J2
R331	G3	R367	G2	R403	K4	R439	K3	R475	K2
R332	H3	R368	G2	R404	L4	R440	L3	R476	K2
R333	F3	R369	G2	R405	L4	R441	J3	R477	L2
R334	F3	R370	G2	R406	J4	R442	J3	R478	L2
R335	G3	R371	H2	R407	J4	R443	J3	R479	L2
R336	G3	R372	H2	R408	K4	R444	J3	R480	L2
R337	G3	R373	F2	R409	K4	R445	J3		
R338	G3	R374	F2	R410	L4	R446	J3	TP1	H1
R339	H3	R375	G2	R411	J3	R447	J3	TP2	A2
R340	H3	R376	G2	R412	J3	R448	J3	TP3	D2
R341	F3	R377	G2	R413	K3	R449	K3		
R342	G3	R378	G2	R414	L3	R450	K3		
R343	G3	R379	H2	R415	L3	R451	K3		
R344	H3	R380	H2	R416	J3	R452	K3		
R345	F3	R381	J3	R417	J3	R453	L3		
R346	G3	R382	J3	R418	K3	R454	L3		
R347	G3	R383	K3	R419	K3	R455	K3		
R348	H3	R384	L3	R420	L3	R456	K3		

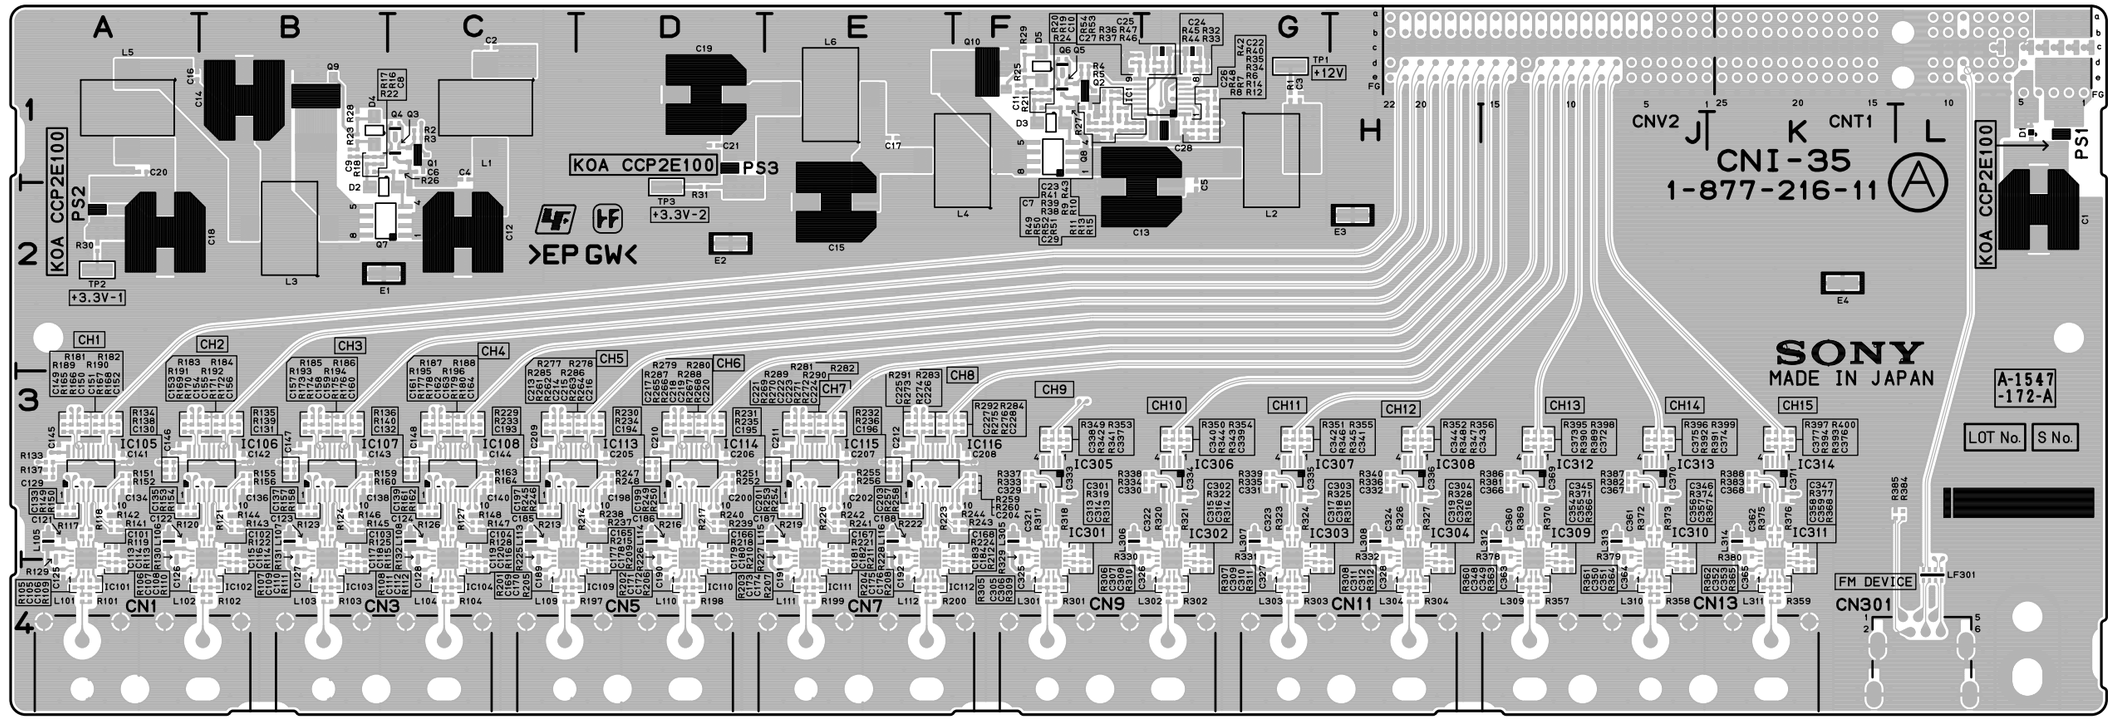

CNI-35 -A SIDE-
SUFFIX: -11


CNI-35 (1-877-216-11)

C1	L2	C108	B4	C144	C3	C180	D4	C216	D3	C324	H3	C360	J3	E1	B2	L1	C1	LF301	L4	R20	F1	R102	B4	R138	A3	R174	B3	R210	D4	R246	C3
C2	C1	C109	B4	C145	A3	C181	E4	C217	D3	C325	F4	C361	J3	E2	D2	L2	G1			R21	F1	R103	B4	R139	B3	R175	B3	R211	E4	R247	D3
C3	G1	C110	B4	C146	A3	C182	E4	C218	D3	C326	G4	C362	K3	E3	H2	L3	B2	PS1	L1	R22	B1	R104	C4	R140	C3	R176	B3	R212	F4	R248	D3
C4	C1	C111	C4	C147	B3	C183	E4	C219	D3	C327	G4	C363	J4	E4	K2	L4	F1	PS2	A2	R23	B1	R105	A4	R141	A3	R177	C3	R213	C3	R249	D3
C5	G2	C112	C4	C148	C3	C184	F4	C220	D3	C328	H4	C364	J4			L5	A1	PS3	D1	R24	F1	R106	A4	R142	A3	R178	C3	R214	C3	R250	D3
C6	C1	C113	A4	C149	A3	C185	C3	C221	E3	C329	F3	C365	K4	IC1	G1	L6	E1			R25	F1	R107	B4	R143	B3	R179	C3	R215	D3	R251	D3
C7	F1	C114	A4	C150	A3	C186	D3	C222	E3	C330	G3	C366	J3	IC101	A3	L101	A4	Q1	C1	R26	C1	R108	C4	R144	B3	R180	C3	R216	D3	R252	D3
C8	B1	C115	B4	C151	A3	C187	E3	C223	E3	C331	G3	C367	J3	IC102	B3	L102	B4	Q2	F1	R27	F1	R109	A4	R145	B3	R181	A3	R217	D3	R253	E3
C9	B1	C116	B4	C152	A3	C188	E3	C224	E3	C332	H3	C368	K3	IC103	B3	L103	B4	Q3	C1	R28	B1	R110	B4	R146	B3	R182	A3	R218	D3	R254	E3
C10	F1	C117	B4	C153	A3	C189	C4	C225	E3	C333	F3	C369	J3	IC104	C3	L104	C4	Q4	C1	R29	F1	R111	B4	R147	C3	R183	B3	R219	E3	R255	E3
C11	F1	C118	B4	C154	B3	C190	D4	C226	E3	C334	G3	C370	J3	IC105	A3	L105	A3	Q5	F1	R30	A2	R112	C4	R148	C3	R184	B3	R220	E3	R256	E3
C12	C2	C119	C4	C155	B3	C191	E4	C227	E3	C335	G3	C371	K3	IC106	B3	L106	A3	Q6	F1	R31	D2	R113	A4	R149	A3	R185	B3	R221	E3	R257	E3
C13	F2	C120	C4	C156	B3	C192	E4	C228	F3	C336	H3	C372	J3	IC107	B3	L107	B3	Q7	B2	R32	G1	R114	B4	R150	A3	R186	B3	R222	E3	R258	E3
C14	B1	C121	A3	C157	B3	C193	C3	C301	F3	C337	F3	C373	J3	IC108	C3	L108	C3	Q8	F1	R33	G1	R115	B4	R151	A3	R187	C3	R223	E3	R259	F3
C15	E2	C122	A3	C158	B3	C194	D3	C302	G3	C338	F3	C374	J3	IC109	C3	L109	C4	Q9	B1	R34	G1	R116	C4	R152	A3	R188	C3	R224	F3	R260	F3
C16	A1	C123	B3	C159	B3	C195	E3	C303	G3	C339	G3	C375	J3	IC110	D3	L110	D4	Q10	F1	R35	G1	R117	A3	R153	A3	R189	A3	R225	C3	R261	C3
C17	E1	C124	C3	C160	B3	C196	E3	C304	H3	C340	G3	C376	K3	IC111	E3	L111	E4			R36	G1	R118	A3	R154	A3	R190	A3	R226	D3	R262	C3
C18	A2	C125	A4	C161	C3	C197	C3	C305	F4	C341	G3	C377	K3	IC112	E3	L112	E4	R1	G1	R37	G1	R119	A3	R155	B3	R191	A3	R227	E3	R263	D3
C19	D1	C126	A4	C162	C3	C198	D3	C306	F4	C342	G3			IC113	C3	L113	C3	R2	C1	R38	F1	R120	B3	R156	B3	R192	B3	R228	E3	R264	D3
C20	A1	C127	B4	C163	C3	C199	D3	C307	G4	C343	H3	CN1	A4	IC114	D3	L114	D3	R3	C1	R39	F1	R121	B3	R157	B3	R193	B3	R229	C3	R265	D3
C21	D1	C128	C4	C164	C3	C200	D3	C308	G4	C344	H3	CN3	B4	IC115	E3	L115	E3	R4	F1	R40	G1	R122	B3	R158	B3	R194	B3	R230	D3	R266	D3
C22	G1	C129	A3	C165	D3	C201	E3	C309	G4	C345	J3	CN5	D4	IC116	E3	L116	E3	R5	F1	R41	F1	R123	B3	R159	B3	R195	C3	R231	E3	R267	D3
C23	F1	C130	A3	C166	D3	C202	E3	C310	G4	C346	J3	CN7	E4	IC301	F3	L301	F4	R6	G1	R42	G1	R124	B3	R160	B3	R196	C3	R232	E3	R268	D3
C24	G1	C131	B3	C167	E3	C203	E3	C311	H4	C347	K3	CN9	F4	IC302	G3	L302	G4	R7	G1	R43	F1	R125	B3	R161	C3	R197	C4	R233	C3	R269	E3
C25	G1	C132	C3	C168	F3	C204	F3	C312	H4	C348	J4	CN11	H4	IC303	G3	L303	G4	R8	G1	R44	G1	R126	C3	R162	C3	R198	D4	R234	D3	R270	E3
C26	G1	C133	A3	C169	C4	C205	D3	C313	F4	C349	J4	CN13	J4	IC304	H3	L304	H4	R9	F1	R45	G1	R127	C3	R163	C3	R199	E4	R235	E3	R271	E3
C27	F1	C134	A3	C170	C4	C206	D3	C314	F4	C350	J4	CN301	L4	IC305	F3	L305	F3	R10	F1	R46	G1	R128	C3	R164	C3	R200	E4	R236	E3	R272	E3
C28	G1	C135	A3	C171	D4	C207	E3	C315	G4	C351	J4			IC306	G3	L306	F3	R11	F1	R47	G1	R129	A3	R165	A3	R201	C4	R237	D3	R273	E3
C29	F1	C136	B3	C172	D4	C208	F3	C316	G4	C352	K4	CNT1	L1	IC307	G3	L307	G3	R12	G1	R48	G1	R130	A3	R166	A3	R202	D4	R238	D3	R274	E3
C101	A3	C137	B3	C173	E4	C209	C3	C317	G4	C353	K4	CNV2	J1	IC308	H3	L308	H3	R13	F1	R49	F1	R131	B3	R167	A3	R203	E4	R239	D3	R275	E3
C102	B3	C138	B3	C174	E4	C210	D3	C318	G4	C354	J4			IC309	J3	L309	J4	R14	G1	R50	F1	R132	C3	R168	A3	R204	E4	R240	D3	R276	F3
C103	B3	C139	C3	C175	E4	C211	E3	C319	H4	C355	J4	D1	L1	IC310	J3	L310	J4	R15	F1	R51	F1	R133	A3	R169	A3	R205	D4	R241	E3	R277	C3
C104	C3	C140	C3	C176	E4	C212	E3	C320	H4	C356	J4	D2	B2	IC311	K3	L311	K4	R16	B1	R52	F1	R134	A3	R170	B3	R206	D4	R242	E3	R278	D3
C105	A4	C141	A3	C177	D4	C213	C3	C321	F3	C357	J4	D3	F1	IC312	J3	L312	J3	R17	B1	R53	F1	R135	B3	R171	B3	R207	E4	R243	F3	R279	D3
C106	A4	C142	B3	C178	D4	C214	C3	C322	G3	C358	K4	D4	B1	IC313	J3	L313	J3	R18	B1	R54	F1	R136	C3	R172	B3	R208	E4	R244	F3	R280	D3
C107	B4	C143	B3	C179	D4	C215	D3	C323	G3	C359	K4	D5	F1	IC314	K3	L314	K3	R19	F1	R101	A4	R137	A3	R173	B3	R209	D4	R245	C3	R281	E3

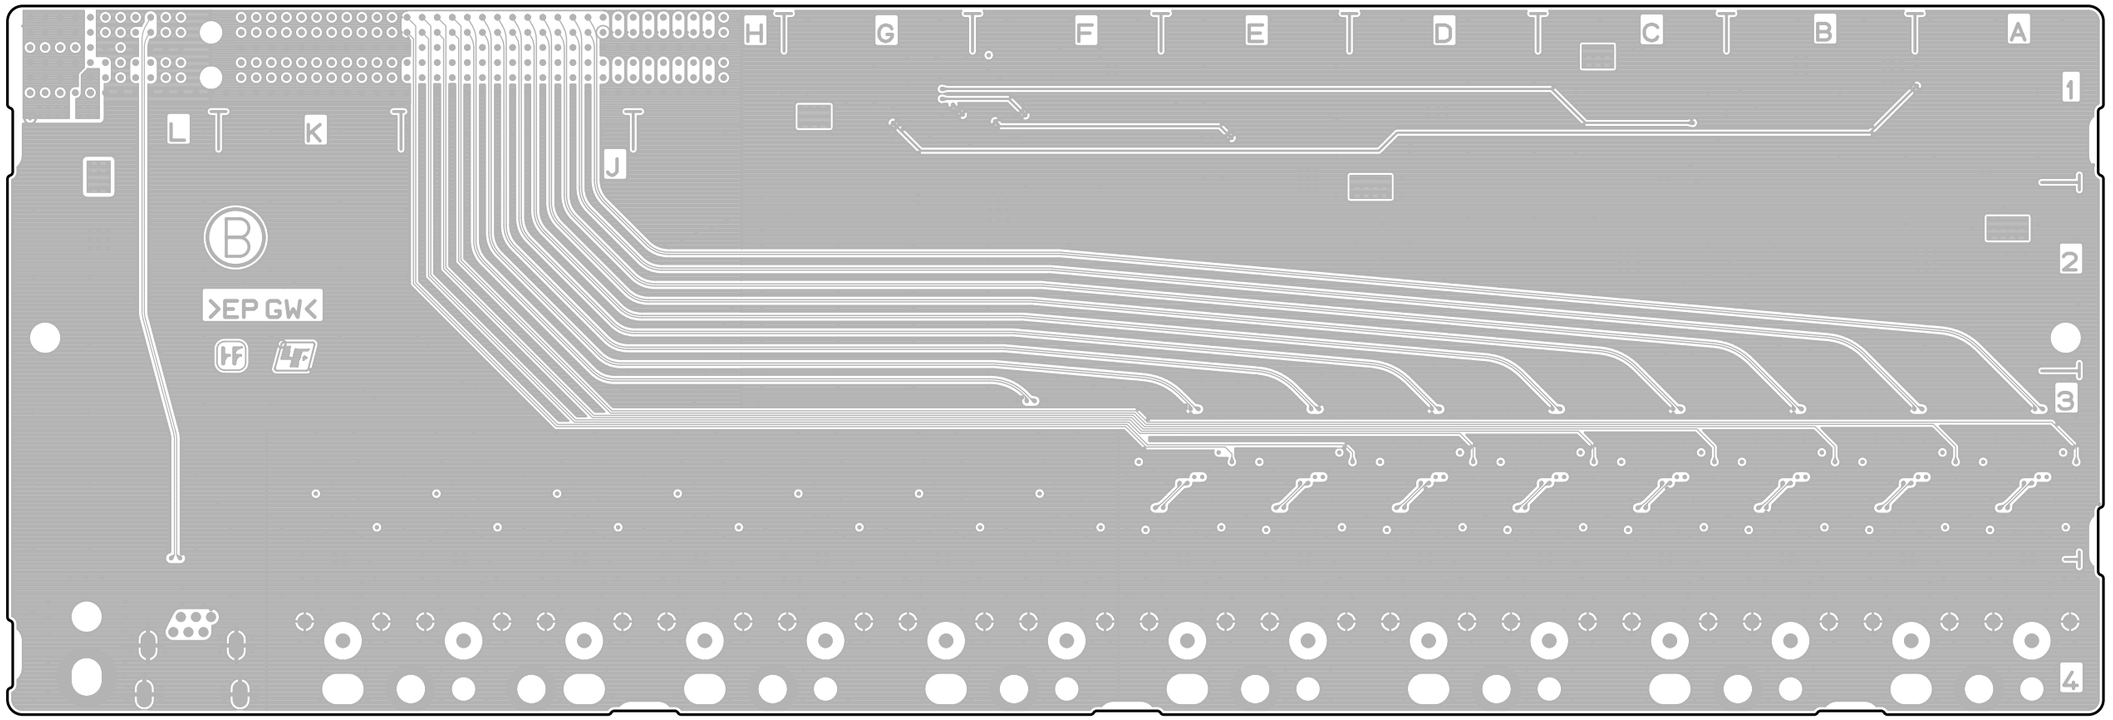

CNI-35 -B SIDE-
SUFFIX: -11


R282	E3	R326	H3	R362	K4	R398	J3
R283	E3	R327	H3	R363	J4	R399	J3
R284	F3	R328	H3	R364	J4	R400	K3
R285	C3	R329	F3	R365	K4		
R286	D3	R330	G3	R366	J4	TP1	G1
R287	D3	R331	G3	R367	J4	TP2	A2
R288	D3	R332	H3	R368	K4	TP3	D2
R289	E3	R333	F3	R369	J3		
R290	E3	R334	G3	R370	J3		
R291	E3	R335	G3	R371	J3		
R292	E3	R336	H3	R372	J3		
R301	F4	R337	F3	R373	J3		
R302	G4	R338	G3	R374	J3		
R303	G4	R339	G3	R375	K3		
R304	H4	R340	H3	R376	K3		
R305	F4	R341	F3	R377	K3		
R306	G4	R342	F3	R378	J3		
R307	G4	R343	G3	R379	J3		
R308	H4	R344	G3	R380	K3		
R309	F4	R345	G3	R381	J3		
R310	G4	R346	G3	R382	J3		
R311	G4	R347	H3	R383	K3		
R312	H4	R348	H3	R384	L3		
R313	F4	R349	F3	R385	K3		
R314	G4	R350	G3	R386	J3		
R315	G4	R351	G3	R387	J3		
R316	H4	R352	H3	R388	K3		
R317	F3	R353	F3	R389	J3		
R318	F3	R354	G3	R390	J3		
R319	F3	R355	G3	R391	J3		
R320	G3	R356	H3	R392	J3		
R321	G3	R357	J4	R393	K3		
R322	G3	R358	J4	R394	K3		
R323	G3	R359	K4	R395	J3		
R324	G3	R360	J4	R396	J3		
R325	G3	R361	J4	R397	K3		

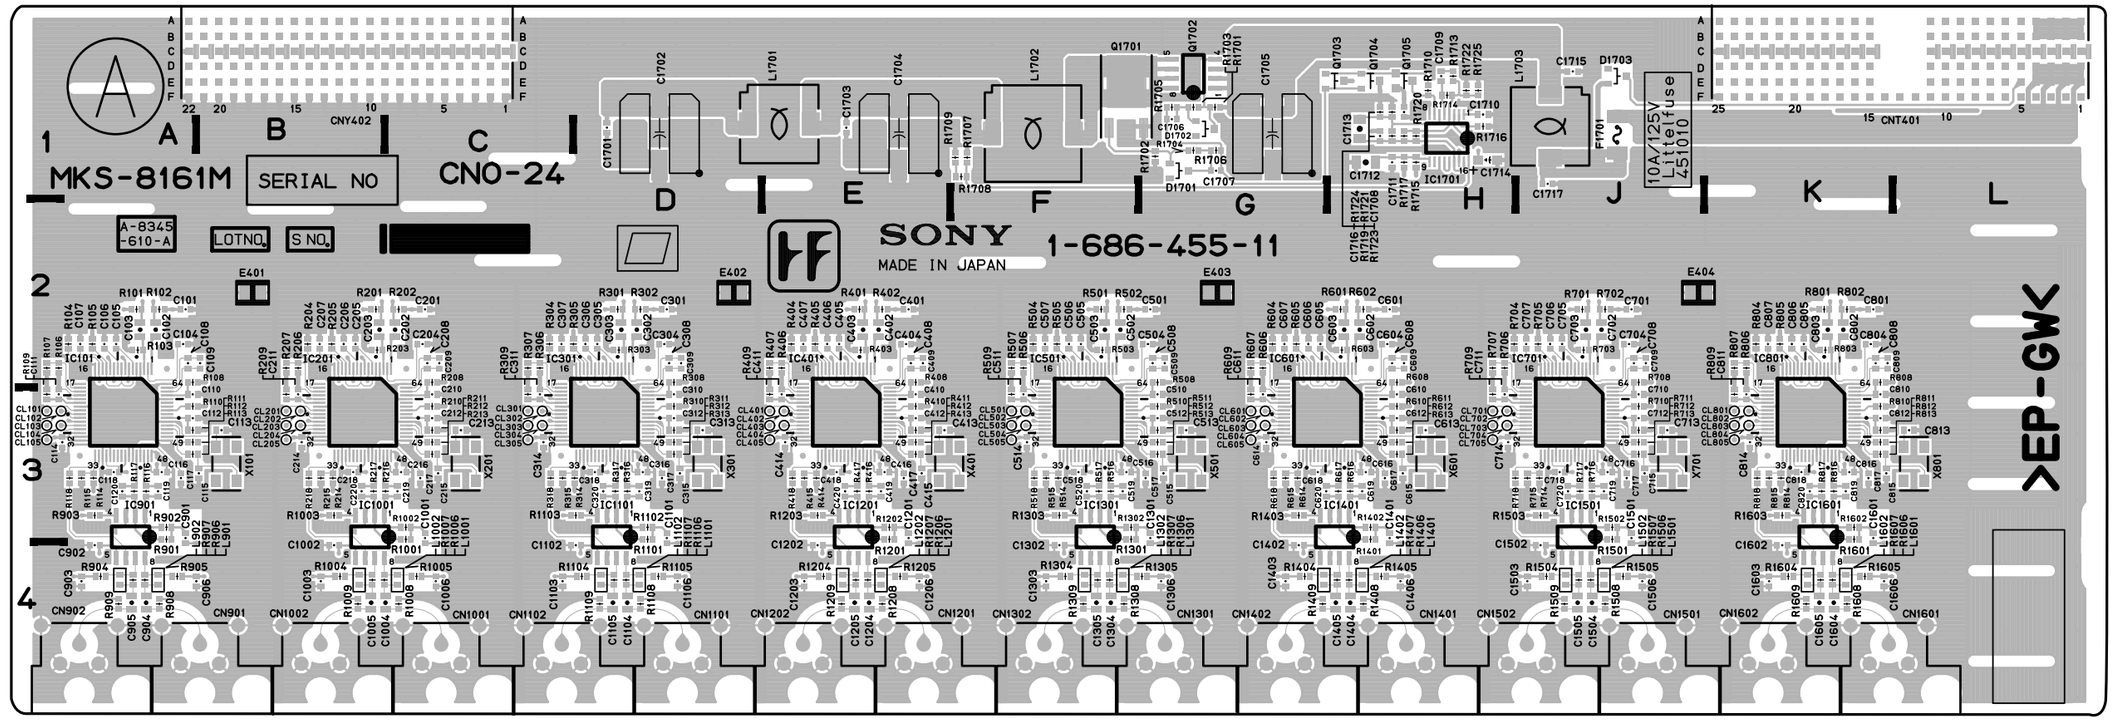


CNO-24 -A SIDE-
SUFFIX: -11

CNO-24 (1-686-455-11)

C101	A2	C218	B3	C415	E3	C612	H3	C809	K2	C1302	F4	C1715	J1	CL704	H3	F1701	J1	L1702	F1	R211	C3	R412	E3	R613	H3	R814	K3	R1206	E4	R1607	K4
C102	A2	C219	C3	C416	E3	C613	H3	C810	K3	C1303	F4	C1716	H1	CL705	H3			L1703	J1	R212	C3	R413	E3	R614	G3	R815	K3	R1207	E4	R1608	K4
C103	A2	C220	B3	C417	E3	C614	G3	C811	K3	C1304	F4	C1717	J1	CL801	K3	IC101	A3			R213	C3	R414	E3	R615	G3	R816	K3	R1208	E4	R1609	K4
C104	A2	C301	D2	C418	E3	C615	H3	C812	K3	C1305	F4			CL802	K3	IC201	B3	Q1701	F1	R214	B3	R415	E3	R616	H3	R817	K3	R1209	E4	R1701	G1
C105	A2	C302	D2	C419	E3	C616	H3	C813	L3	C1306	G4	CL101	A3	CL803	K3	IC301	D3	Q1702	G1	R215	B3	R416	E3	R617	H3	R818	K3	R1301	F3	R1702	G1
C106	A2	C303	D2	C420	E3	C617	H3	C814	K3	C1401	H3	CL102	A3	CL804	K3	IC401	E3	Q1703	H1	R216	C3	R417	E3	R618	G3	R901	A3	R1302	F3	R1703	G1
C107	A2	C304	D2	C501	G2	C618	G3	C815	K3	C1402	G4	CL103	A3	CL805	K3	IC501	F3	Q1704	H1	R217	B3	R418	E3	R701	J2	R902	A3	R1303	F3	R1704	G1
C108	A2	C305	D2	C502	F2	C619	H3	C816	K3	C1403	G4	CL104	A3			IC601	H3	Q1705	H1	R218	B3	R501	F2	R702	J2	R903	A3	R1304	F4	R1705	G1
C109	B2	C306	D2	C503	F2	C620	G3	C817	K3	C1404	H4	CL105	A3	CN901	B4	IC701	J3			R301	D2	R502	F2	R703	J2	R904	A4	R1305	G4	R1706	G1
C110	A3	C307	C2	C504	G2	C701	J2	C818	K3	C1405	H4	CL201	B3	CN902	A4	IC801	K3	R101	A2	R302	D2	R503	F2	R704	H2	R905	A4	R1306	F4	R1707	F1
C111	A3	C308	D2	C505	F2	C702	J2	C819	K3	C1406	H4	CL202	B3	CN1001	C4	IC901	A3	R102	A2	R303	D2	R504	F2	R705	J2	R906	A4	R1307	F4	R1708	F1
C112	A3	C309	D2	C506	F2	C703	J2	C820	K3	C1501	J3	CL203	B3	CN1002	B4	IC1001	B3	R103	A2	R304	C2	R505	F2	R706	H2	R907	A4	R1308	F4	R1709	F1
C113	B3	C310	D3	C507	F2	C704	J2	C901	A3	C1502	J4	CL204	B3	CN1101	D4	IC1101	D3	R104	A2	R305	D2	R506	F2	R707	H2	R908	A4	R1309	F4	R1710	H1
C114	A3	C311	C3	C508	G2	C705	J2	C902	A4	C1503	J4	CL205	B3	CN1102	C4	IC1201	E3	R105	A2	R306	C2	R507	F2	R708	J2	R909	A4	R1401	H3	R1713	H1
C115	B3	C312	D3	C509	G2	C706	J2	C903	A4	C1504	J4	CL301	C3	CN1201	E4	IC1301	F3	R106	A2	R307	C2	R508	G2	R709	H3	R1001	C3	R1402	H3	R1714	H1
C116	A3	C313	D3	C510	G3	C707	J2	C904	A4	C1505	J4	CL302	C3	CN1202	E4	IC1401	H3	R107	A2	R308	D2	R509	F3	R710	J3	R1002	C3	R1403	G3	R1715	H1
C117	A3	C314	C3	C511	F3	C708	J2	C905	A4	C1506	J4	CL303	C3	CN1301	G4	IC1501	J3	R108	A2	R309	C3	R510	G3	R711	J3	R1003	B3	R1404	G4	R1716	H1
C118	A3	C315	D3	C512	G3	C709	J2	C906	B4	C1601	K3	CL304	C3	CN1302	F4	IC1601	K3	R109	A3	R310	D3	R511	G3	R712	J3	R1004	B4	R1405	H4	R1717	H1
C119	A3	C316	D3	C513	G3	C710	J3	C1001	C3	C1602	K4	CL305	C3	CN1401	H4	IC1701	H1	R110	A3	R311	D3	R512	G3	R713	J3	R1005	C4	R1406	H4	R1719	H1
C120	A3	C317	D3	C514	F3	C711	H3	C1002	B4	C1603	K4	CL401	E3	CN1402	G4			R111	A3	R312	D3	R513	G3	R714	J3	R1006	B4	R1407	H4	R1720	H1
C201	C2	C318	D3	C515	G3	C712	J3	C1003	B4	C1604	K4	CL402	E3	CN1501	J4	L901	A4	R112	A3	R313	D3	R514	F3	R715	J3	R1007	B4	R1408	H4	R1721	H1
C202	C2	C319	D3	C516	F3	C713	J3	C1004	C4	C1605	K4	CL403	E3	CN1502	J4	L902	A4	R113	A3	R314	D3	R515	F3	R716	J3	R1008	C4	R1409	G4	R1722	H1
C203	B2	C320	D3	C517	G3	C714	H3	C1005	B4	C1606	K4	CL404	E3	CN1601	K4	L1001	C4	R114	A3	R315	C3	R516	F3	R717	J3	R1009	B4	R1501	J3	R1723	H1
C204	C2	C401	E2	C518	F3	C715	J3	C1006	C4	C1701	D1	CL405	E3	CN1602	K4	L1002	B4	R115	A3	R316	D3	R517	F3	R718	H3	R1101	D3	R1502	J3	R1724	H1
C205	B2	C402	E2	C519	F3	C716	J3	C1101	D3	C1702	D1	CL501	F3			L1101	D4	R116	A3	R317	D3	R518	F3	R801	K2	R1102	D3	R1503	J3	R1725	H1
C206	B2	C403	E2	C520	F3	C717	J3	C1102	D4	C1703	E1	CL502	F3	CNT401	L1	L1102	D4	R117	A3	R318	C3	R601	H2	R802	K2	R1103	D3	R1504	J4		
C207	B2	C404	E2	C601	H2	C718	J3	C1103	C4	C1704	E1	CL503	F3	CNY402	B1	L1201	E4	R118	A3	R401	E2	R602	H2	R803	K2	R1104	D4	R1505	J4	X101	B3
C208	C2	C405	E2	C602	H2	C719	J3	C1104	D4	C1705	G1	CL504	F3			L1202	E4	R201	B2	R402	E2	R603	H2	R804	K2	R1105	D4	R1506	J4	X201	C3
C209	C2	C406	E2	C603	H2	C720	J3	C1105	D4	C1706	G1	CL505	F3	D1701	G1	L1301	F4	R202	C2	R403	E2	R604	G2	R805	K2	R1106	D4	R1507	J4	X301	D3
C210	C3	C407	E2	C604	H2	C801	K2	C1106	D4	C1707	G1	CL601	G3	D1702	G1	L1302	F4	R203	B2	R404	E2	R605	G2	R806	K2	R1107	D4	R1508	J4	X401	E3
C211	B3	C408	E2	C605	G2	C802	K2	C1201	E3	C1708	H1	CL602	G3	D1703	J1	L1401	H4	R204	B2	R405	E2	R606	G2	R807	K2	R1108	D4	R1509	J4	X501	G3
C212	C3	C409	E2	C606	G2	C803	K2	C1202	E4	C1709	H1	CL603	G3			L1402	G4	R205	B2	R406	E2	R607	G2	R808	K2	R1109	D4	R1601	K3	X601	H3
C213	C3	C410	E3	C607	G2	C804	K2	C1203	E4	C1710	H1	CL604	G3	E401	B2	L1501	J4	R206	B2	R407	E2	R608	H2	R809	K3	R1201	E3	R1602	K3	X701	J3
C214	B3	C411	E3	C608	H2	C805	K2	C1204	E4	C1711	H1	CL605	G3	E402	D2	L1502	J4	R207	B2	R408	E2	R609	G3	R810	K3	R1202	E3	R1603	K3	X801	L3
C215	C3	C412	E3	C609	H2	C806	K2	C1205	E4	C1712	H1	CL701	H3	E403	G2	L1601	K4	R208	C2	R409	E3	R610	H3	R811	K3	R1203	E3	R1604	K4		
C216	C3	C413	E3	C610	H3	C807	K2	C1206	E4	C1713	H1	CL702	H3	E404	J2	L1602	K4	R209	B3	R410	E3	R611	H3	R812	K3	R1204	E4	R1605	K4		
C217	C3	C414	E3	C611	G3	C808	K2	C1301	G3	C1714	H1	CL703	H3			L1701	E1	R210	C3	R411	E3	R612	H3	R813	K3	R1205	E4	R1606	K4		

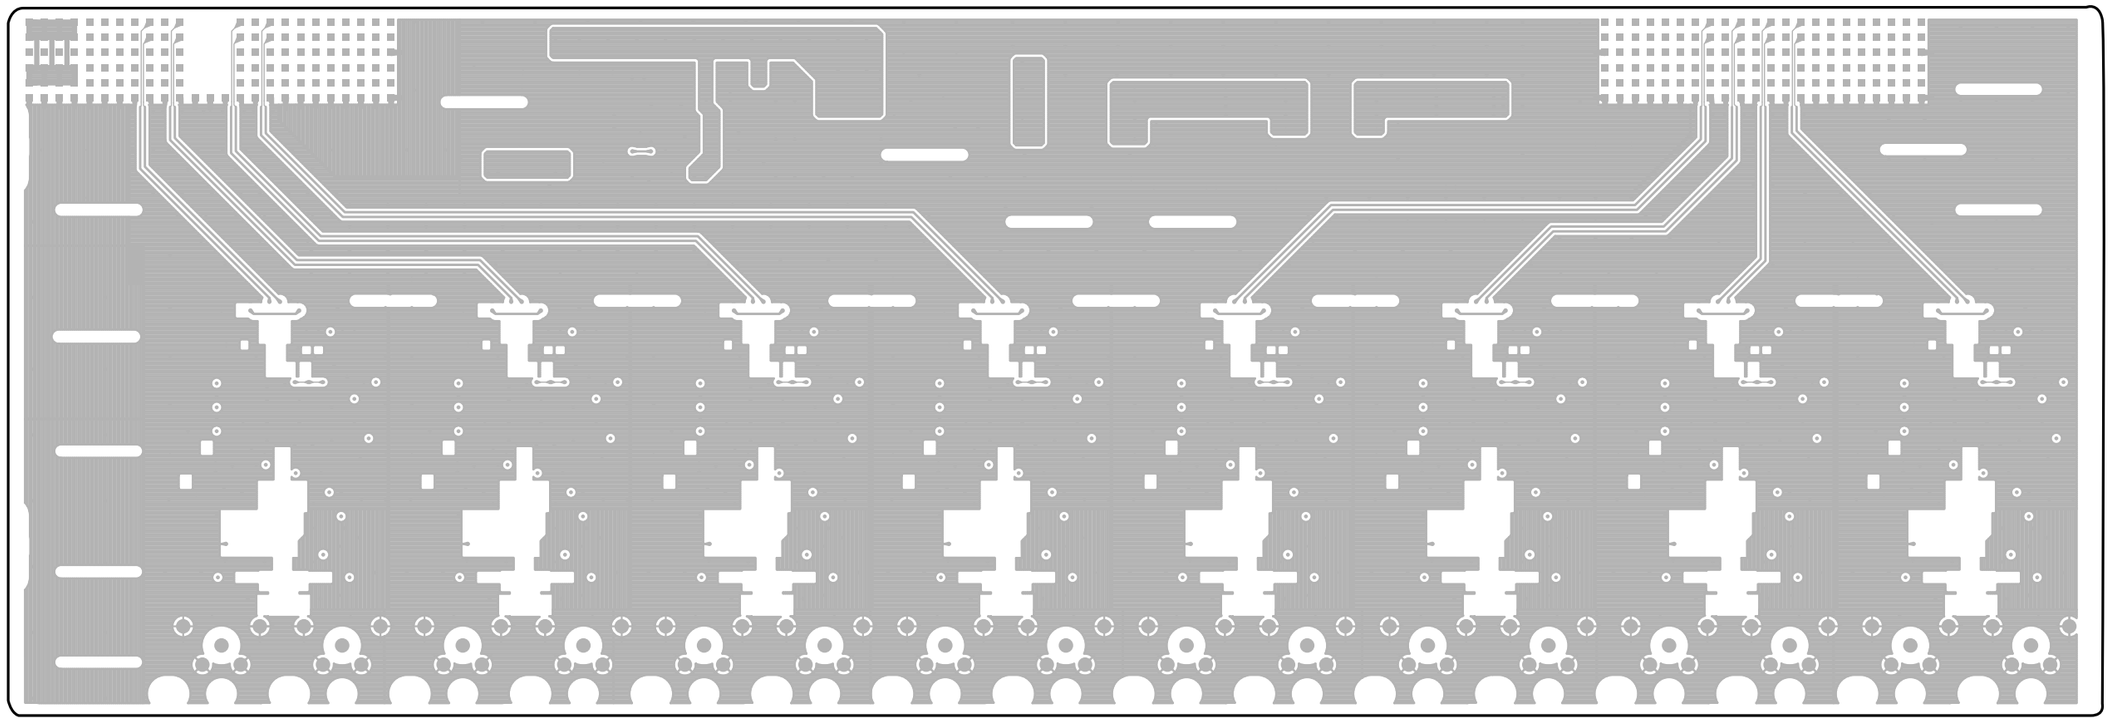


CNO-24 -B SIDE-
SUFFIX: -11

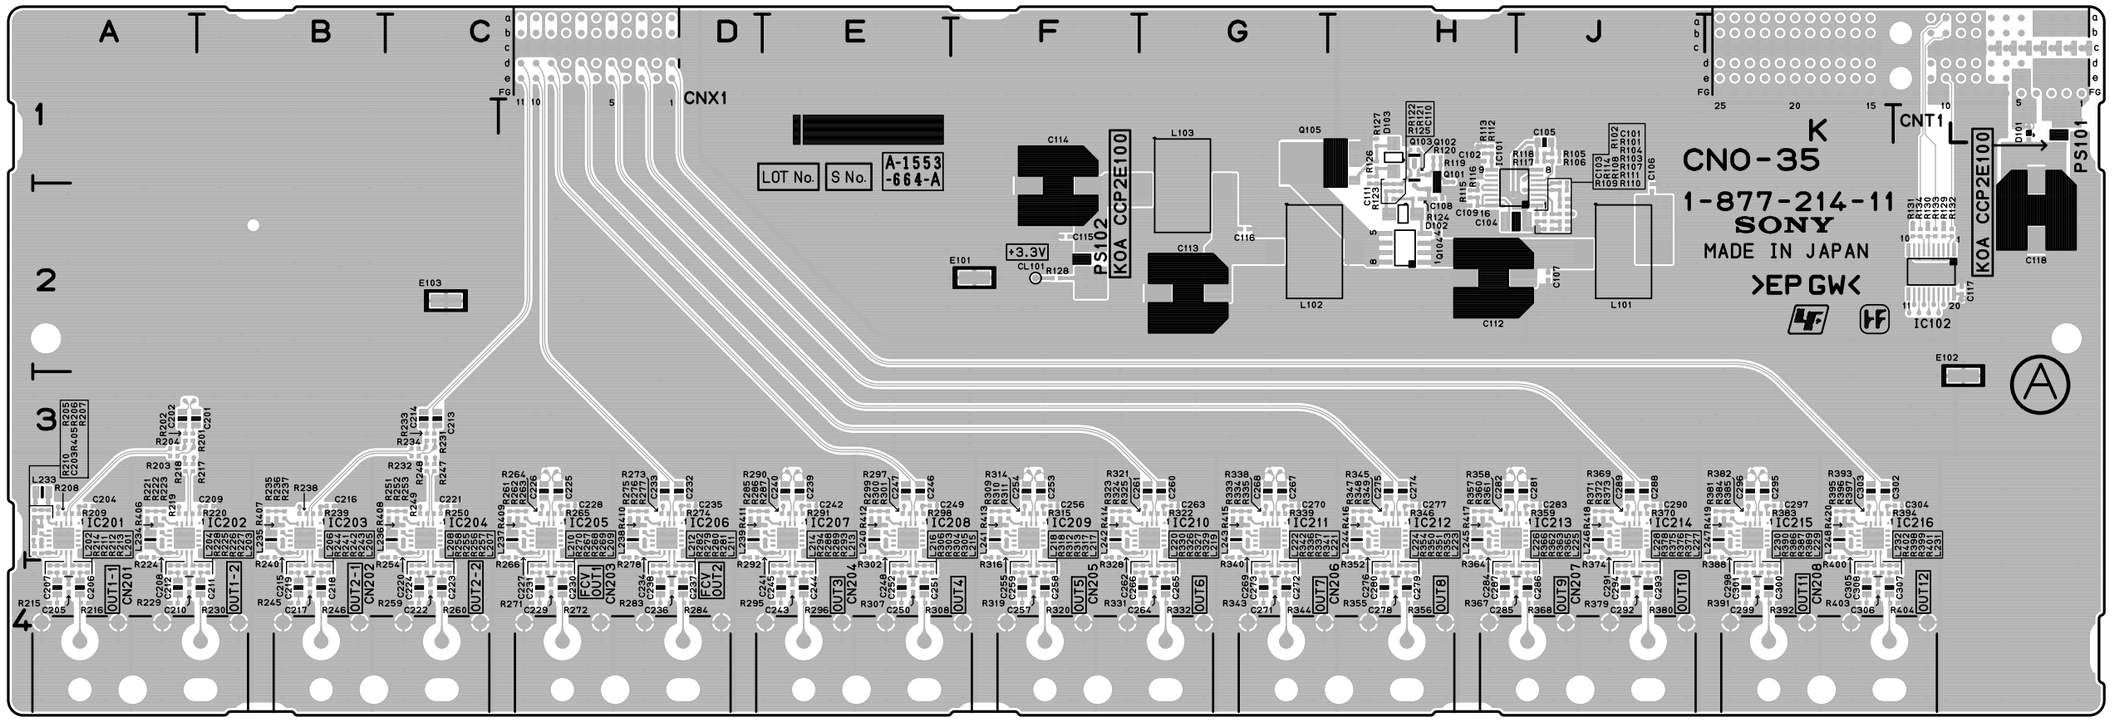


CNO-35 -A SIDE-
SUFFIX: -11

CNO-35 (1-877-214-11)

C101	J1	C221	C3	C259	F4	C297	K3	IC202	A3	L220	F4	R101	J2	R205	A3	R243	B4	R281	D4	R319	F4	R357	H3	R395	K3
C102	H1	C222	C4	C260	G3	C298	K3	IC203	B3	L221	G4	R102	J2	R206	A3	R244	B4	R282	D4	R320	F4	R358	H3	R396	K3
C103	J2	C223	C4	C261	G3	C299	K4	IC204	C3	L222	G4	R103	J2	R207	A3	R245	B4	R283	D4	R321	G3	R359	J3	R397	K3
C104	H2	C224	C4	C262	F3	C300	K4	IC205	D3	L223	H4	R104	J2	R208	A3	R246	B4	R284	D4	R322	G3	R360	H3	R398	K4
C105	J1	C225	D3	C263	G3	C301	K4	IC206	D3	L224	H4	R105	J1	R209	A3	R247	C3	R285	D3	R323	F3	R361	H3	R399	K4
C106	J2	C226	D3	C264	G4	C302	K3	IC207	E3	L225	J4	R106	J1	R210	A3	R248	C3	R286	D3	R324	F3	R362	H4	R400	K3
C107	J2	C227	D3	C265	G4	C303	K3	IC208	E3	L226	H4	R107	J2	R211	A4	R249	C3	R287	E3	R325	F3	R363	J4	R401	K4
C108	H2	C228	D3	C266	G4	C304	K3	IC209	F3	L227	J4	R108	J2	R212	A4	R250	C3	R288	E4	R326	G4	R364	H3	R402	K4
C109	H2	C229	D4	C267	G3	C305	K3	IC210	G3	L228	J4	R109	J2	R213	A4	R251	C3	R289	E4	R327	G4	R365	J4	R403	K4
C110	H2	C230	D4	C268	G3	C306	K4	IC211	G3	L229	K4	R110	J2	R214	A4	R252	C3	R290	E3	R328	F3	R366	H4	R404	K4
C111	H1	C231	D4	C269	G3	C307	K4	IC212	H3	L230	K4	R111	J2	R215	A4	R253	C3	R291	E3	R329	G4	R367	H4	R405	A3
C112	H2	C232	D3	C270	G3	C308	K4	IC213	H3	L231	K4	R112	H1	R216	A4	R254	C3	R292	D3	R330	G4	R368	J4	R406	A3
C113	G2	C233	D3	C271	G4			IC214	J3	L232	K4	R113	H1	R217	A3	R255	C4	R293	E4	R331	F4	R369	J3	R407	B3
C114	F2	C234	D3	C272	G4	CL101	F2	IC215	K3	L233	A3	R114	J2	R218	A3	R256	C4	R294	E4	R332	G4	R370	J3	R408	C3
C115	F2	C235	D3	C273	G4			IC216	K3	L234	A3	R115	H2	R219	A3	R257	C4	R295	E4	R333	G3	R371	J3	R409	D3
C116	G2	C236	D4	C274	H3	CN201	A4			L235	B3	R116	H2	R220	A3	R258	C4	R296	E4	R334	G3	R372	J3	R410	D3
C117	K2	C237	D4	C275	H3	CN202	B4	L101	J2	L236	C3	R117	J1	R221	A3	R259	C4	R297	E3	R335	G3	R373	J3	R411	E3
C118	K2	C238	D4	C276	H3	CN203	D4	L102	G2	L237	D3	R118	J1	R222	A3	R260	C4	R298	E3	R336	G4	R374	J3	R412	E3
C201	A3	C239	E3	C277	H3	CN204	E4	L103	G2	L238	D3	R119	H1	R223	A3	R261	D3	R299	E3	R337	G4	R375	J4	R413	F3
C202	A3	C240	E3	C278	H4	CN205	F4	L201	A4	L239	D3	R120	H1	R224	A3	R262	D3	R300	E3	R338	G3	R376	J4	R414	F3
C203	A3	C241	E3	C279	H4	CN206	H4	L202	A4	L240	E3	R121	H2	R225	A4	R263	D3	R301	E3	R339	G3	R377	J4	R415	G3
C204	A3	C242	E3	C280	H4	CN207	J4	L203	B4	L241	F3	R122	H2	R226	A4	R264	D3	R302	E3	R340	G3	R378	J4	R416	H3
C205	A4	C243	E4	C281	J3	CN208	K4	L204	A4	L242	F3	R123	H1	R227	B4	R265	D3	R303	E4	R341	G4	R379	J4	R417	H3
C206	A4	C244	E4	C282	H3			L205	B4	L243	G3	R124	H2	R228	A4	R266	D3	R304	E4	R342	G4	R380	J4	R418	J3
C207	A4	C245	E4	C283	J3	CNT1	K1	L206	B4	L244	H3	R125	H2	R229	A4	R267	D4	R305	E4	R343	G4	R381	K3	R419	K3
C208	A3	C246	E3	C284	H3	CNX1	D1	L207	C4	L245	H3	R126	H1	R230	B4	R268	D4	R306	E4	R344	G4	R382	K3	R420	K3
C209	B3	C247	E3	C285	H4			L208	C4	L246	J3	R127	H1	R231	C3	R269	D4	R307	E4	R345	H3	R383	K3		
C210	A4	C248	E3	C286	J4	D101	K1	L209	D4	L247	K3	R128	F2	R232	C3	R270	D4	R308	E4	R346	H3	R384	K3		
C211	B4	C249	E3	C287	H4	D102	H2	L210	D4	L248	K3	R129	K2	R233	C3	R271	D4	R309	F3	R347	H3	R385	K3		
C212	A4	C250	E4	C288	J3	D103	H1	L211	D4			R130	K2	R234	C3	R272	D4	R310	F3	R348	H3	R386	K4		
C213	C3	C251	E4	C289	J3			L212	D4	PS101	K1	R131	K2	R235	B3	R273	D3	R311	F3	R349	H3	R387	K4		
C214	C3	C252	E4	C290	J3	E101	F2	L213	E4	PS102	F2	R132	K2	R236	B3	R274	D3	R312	F4	R350	H4	R388	K3		
C215	B3	C253	F3	C291	J3	E102	K3	L214	E4			R133	K2	R237	B3	R275	D3	R313	F4	R351	H4	R389	K4		
C216	B3	C254	F3	C292	J4	E103	C2	L215	E4	Q101	H1	R134	K2	R238	B3	R276	D3	R314	F3	R352	H3	R390	K4		
C217	B4	C255	F3	C293	J4			L216	E4	Q102	H1	R201	A3	R239	B3	R277	D3	R315	F3	R353	H4	R391	K4		
C218	B4	C256	F3	C294	J4	IC101	H2	L217	F4	Q103	H1	R202	A3	R240	B3	R278	D3	R316	F3	R354	H4	R392	K4		
C219	B4	C257	F4	C295	K3	IC102	K2	L218	F4	Q104	H2	R203	A3	R241	B4	R279	D4	R317	F4	R355	H4	R393	K3		
C220	C3	C258	F4	C296	K3	IC201	A3	L219	G4	Q105	G1	R204	A3	R242	B4	R280	D4	R318	F4	R356	H4	R394	K3		

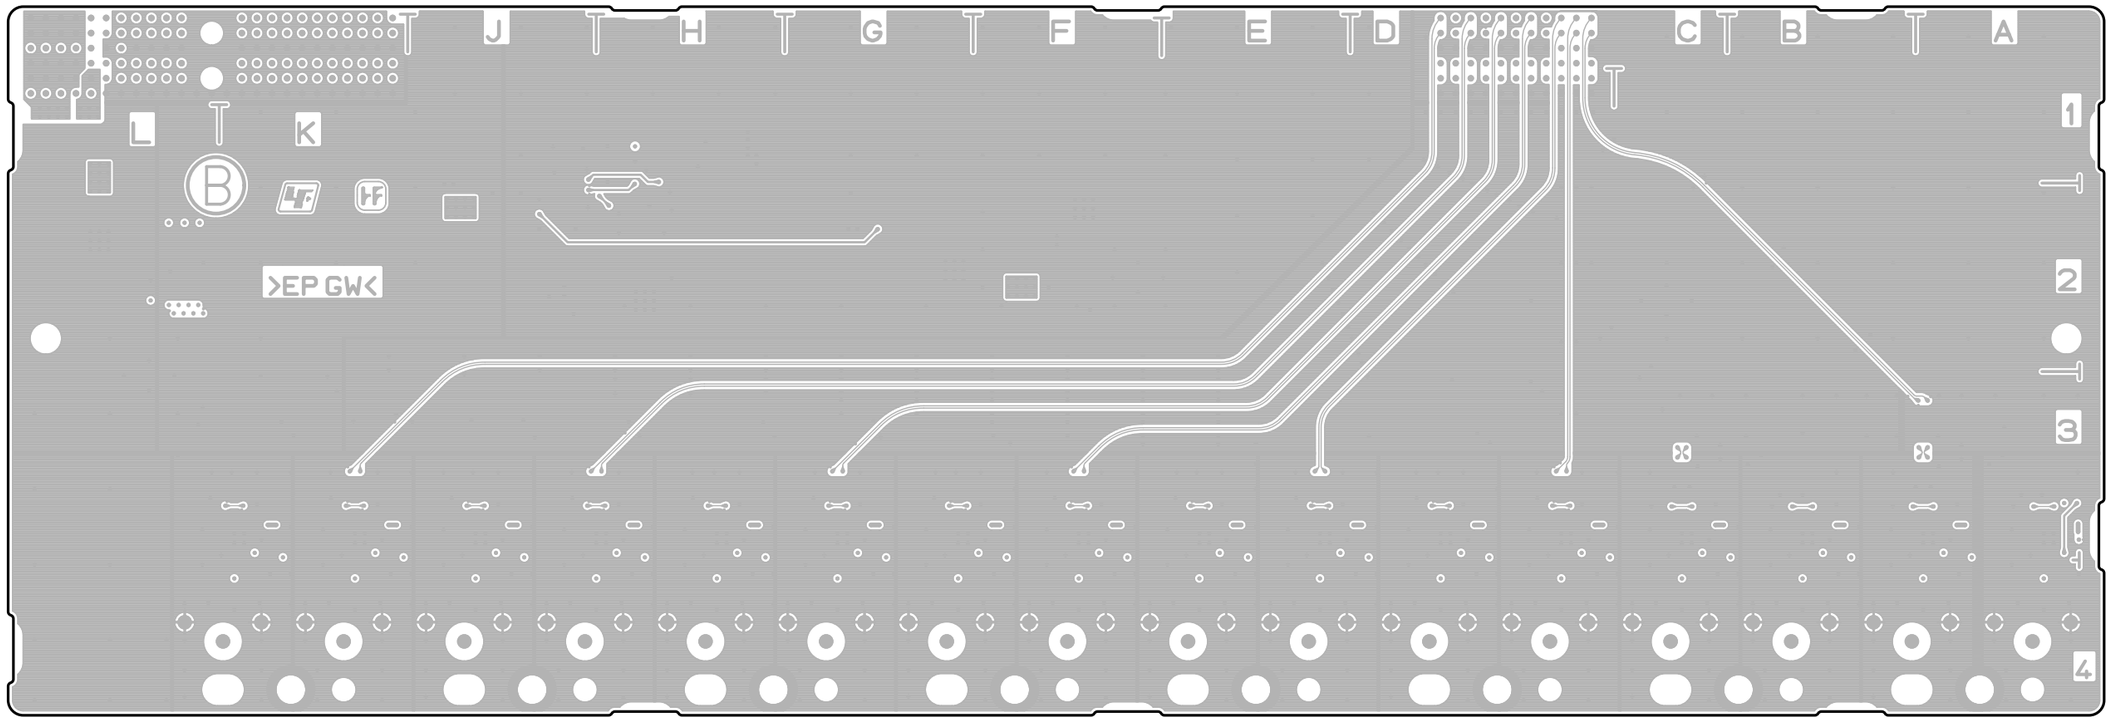


CNO-35 -B SIDE-
SUFFIX: -11

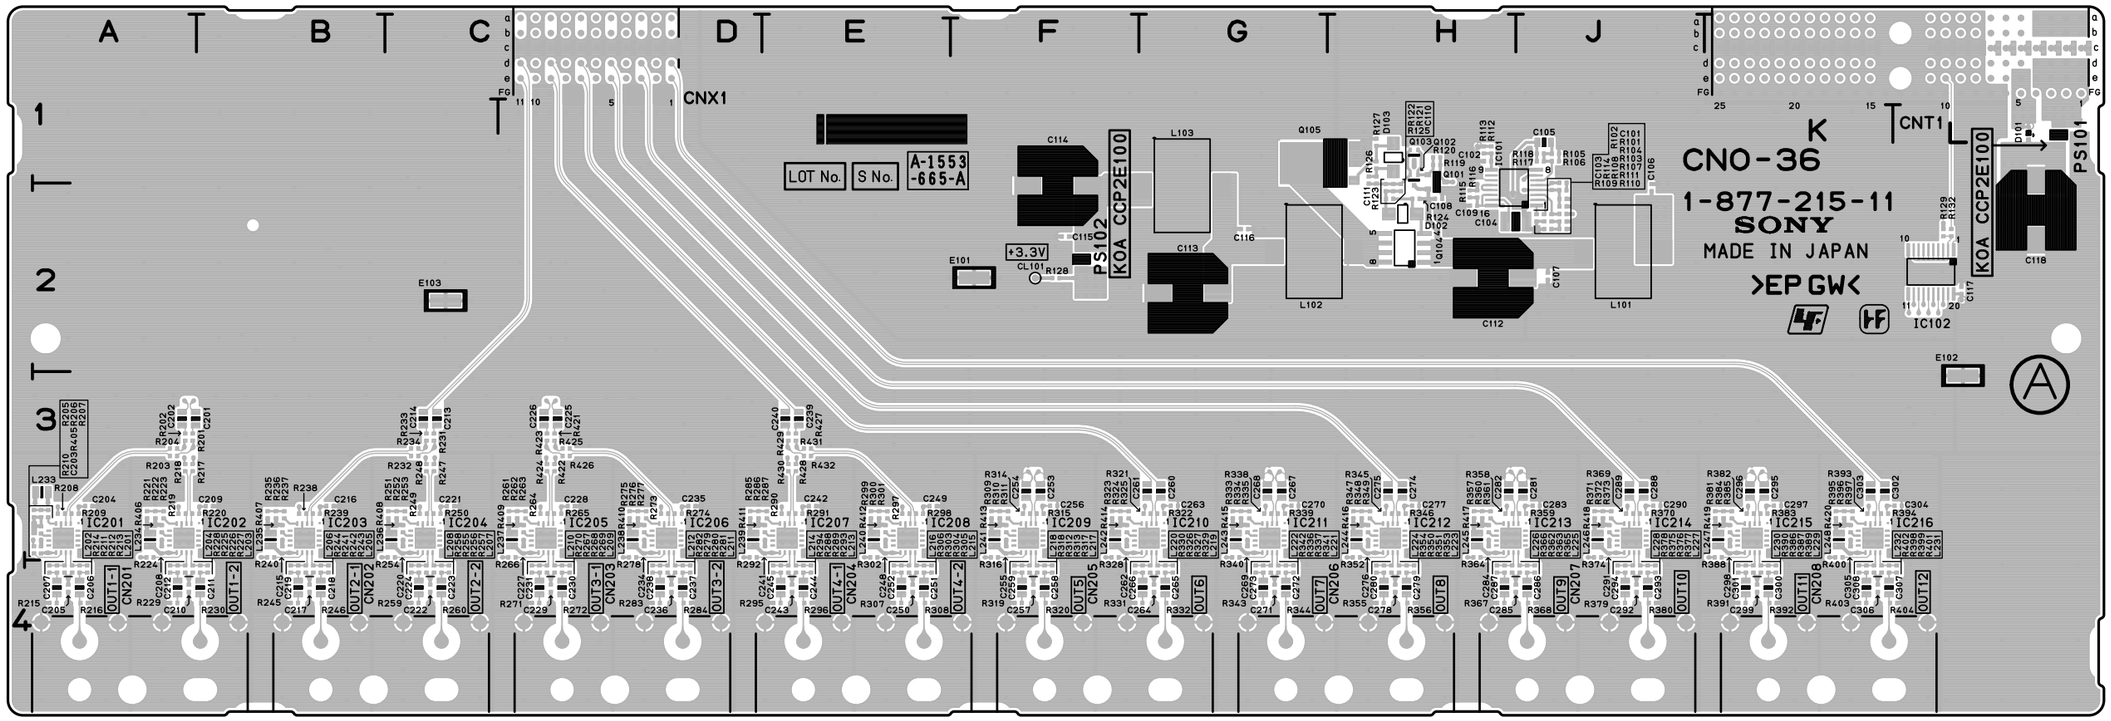


CNO-36 -A SIDE-
SUFFIX: -11

CNO-36 (1-877-215-11)


C101	J1	C221	C3	C263	G3	C301	K4	IC206	D3	L224	H4	R104	J2	R212	A4	R250	C3	R288	E4	R326	G4	R364	H3	R402	K4
C102	H1	C222	C4	C264	G4	C302	K3	IC207	E3	L225	J4	R105	J1	R213	A4	R251	C3	R289	E4	R327	G4	R365	J4	R403	K4
C103	J2	C223	C4	C265	G4	C303	K3	IC208	E3	L226	H4	R106	J1	R214	A4	R252	C3	R290	E3	R328	F3	R366	H4	R404	K4
C104	H2	C224	C4	C266	G4	C304	K3	IC209	F3	L227	J4	R107	J2	R215	A4	R253	C3	R291	E3	R329	G4	R367	H4	R405	A3
C105	J1	C225	D3	C267	G3	C305	K3	IC210	G3	L228	J4	R108	J2	R216	A4	R254	C3	R292	D3	R330	G4	R368	J4	R406	A3
C106	J2	C226	D3	C268	G3	C306	K4	IC211	G3	L229	K4	R109	J2	R217	A3	R255	C4	R293	E4	R331	F4	R369	J3	R407	B3
C107	J2	C227	D3	C269	G3	C307	K4	IC212	H3	L230	K4	R110	J2	R218	A3	R256	C4	R294	E4	R332	G4	R370	J3	R408	C3
C108	H2	C228	D3	C270	G3	C308	K4	IC213	H3	L231	K4	R111	J2	R219	A3	R257	C4	R295	E4	R333	G3	R371	J3	R409	D3
C109	H2	C229	D4	C271	G4			IC214	J3	L232	K4	R112	H1	R220	A3	R258	C4	R296	E4	R334	G3	R372	J3	R410	D3
C110	H2	C230	D4	C272	G4	CL101	F2	IC215	K3	L233	A3	R113	H1	R221	A3	R259	C4	R297	E3	R335	G3	R373	J3	R411	E3
C111	H1	C231	D4	C273	G4			IC216	K3	L234	A3	R114	J2	R222	A3	R260	C4	R298	E3	R336	G4	R374	J3	R412	E3
C112	H2	C234	D3	C274	H3	CN201	A4			L235	B3	R115	H2	R223	A3	R261	D3	R299	E3	R337	G4	R375	J4	R413	F3
C113	G2	C235	D3	C275	H3	CN202	B4	L101	J2	L236	C3	R116	H2	R224	A3	R262	D3	R300	E3	R338	G3	R376	J4	R414	F3
C114	F2	C236	D4	C276	H3	CN203	D4	L102	G2	L237	D3	R117	J1	R225	A4	R263	D3	R301	E3	R339	G3	R377	J4	R415	G3
C115	F2	C237	D4	C277	H3	CN204	E4	L103	G2	L238	D3	R118	J1	R226	A4	R264	D3	R302	E3	R340	G3	R378	J4	R416	H3
C116	G2	C238	D4	C278	H4	CN205	F4	L201	A4	L239	D3	R119	H1	R227	B4	R265	D3	R303	E4	R341	G4	R379	J4	R417	H3
C117	K2	C239	E3	C279	H4	CN206	H4	L202	A4	L240	E3	R120	H1	R228	A4	R266	D3	R304	E4	R342	G4	R380	J4	R418	J3
C118	K2	C240	E3	C280	H4	CN207	J4	L203	B4	L241	F3	R121	H2	R229	A4	R267	D4	R305	E4	R343	G4	R381	K3	R419	K3
C201	A3	C241	E3	C281	J3	CN208	K4	L204	A4	L242	F3	R122	H2	R230	B4	R268	D4	R306	E4	R344	G4	R382	K3	R420	K3
C202	A3	C242	E3	C282	H3			L205	B4	L243	G3	R123	H1	R231	C3	R269	D4	R307	E4	R345	H3	R383	K3	R421	D3
C203	A3	C243	E4	C283	J3	CNT1	K1	L206	B4	L244	H3	R124	H2	R232	C3	R270	D4	R308	E4	R346	H3	R384	K3	R422	D3
C204	A3	C244	E4	C284	H3	CNX1	D1	L207	C4	L245	H3	R125	H2	R233	C3	R271	D4	R309	F3	R347	H3	R385	K3	R423	D3
C205	A4	C245	E4	C285	H4			L208	C4	L246	J3	R126	H1	R234	C3	R272	D4	R310	F3	R348	H3	R386	K4	R424	D3
C206	A4	C248	E3	C286	J4	D101	K1	L209	D4	L247	K3	R127	H1	R235	B3	R273	D3	R311	F3	R349	H3	R387	K4	R425	D3
C207	A4	C249	E3	C287	H4	D102	H2	L210	D4	L248	K3	R128	F2	R236	B3	R274	D3	R312	F4	R350	H4	R388	K3	R426	D3
C208	A3	C250	E4	C288	J3	D103	H1	L211	D4			R129	K2	R237	B3	R275	D3	R313	F4	R351	H4	R389	K4	R427	E3
C209	B3	C251	E4	C289	J3			L212	D4	PS101	K1	R132	K2	R238	B3	R276	D3	R314	F3	R352	H3	R390	K4	R428	E3
C210	A4	C252	E4	C290	J3	E101	F2	L213	E4	PS102	F2	R201	A3	R239	B3	R277	D3	R315	F3	R353	H4	R391	K4	R429	E3
C211	B4	C253	F3	C291	J3	E102	K3	L214	E4			R202	A3	R240	B3	R278	D3	R316	F3	R354	H4	R392	K4	R430	E3
C212	A4	C254	F3	C292	J4	E103	C2	L215	E4	Q101	H1	R203	A3	R241	B4	R279	D4	R317	F4	R355	H4	R393	K3	R431	E3
C213	C3	C255	F3	C293	J4			L216	E4	Q102	H1	R204	A3	R242	B4	R280	D4	R318	F4	R356	H4	R394	K3	R432	E3
C214	C3	C256	F3	C294	J4	IC101	H2	L217	F4	Q103	H1	R205	A3	R243	B4	R281	D4	R319	F4	R357	H3	R395	K3		
C215	B3	C257	F4	C295	K3	IC102	K2	L218	F4	Q104	H2	R206	A3	R244	B4	R282	D4	R320	F4	R358	H3	R396	K3		
C216	B3	C258	F4	C296	K3	IC201	A3	L219	G4	Q105	G1	R207	A3	R245	B4	R283	D4	R321	G3	R359	J3	R397	K3		
C217	B4	C259	F4	C297	K3	IC202	A3	L220	F4			R208	A3	R246	B4	R284	D4	R322	G3	R360	H3	R398	K4		
C218	B4	C260	G3	C298	K3	IC203	B3	L221	G4	R101	J2	R209	A3	R247	C3	R285	D3	R323	F3	R361	H3	R399	K4		
C219	B4	C261	G3	C299	K4	IC204	C3	L222	G4	R102	J2	R210	A3	R248	C3	R286	D3	R324	F3	R362	H4	R400	K3		
C220	C3	C262	F3	C300	K4	IC205	D3	L223	H4	R103	J2	R211	A4	R249	C3	R287	E3	R325	F3	R363	J4	R401	K4		

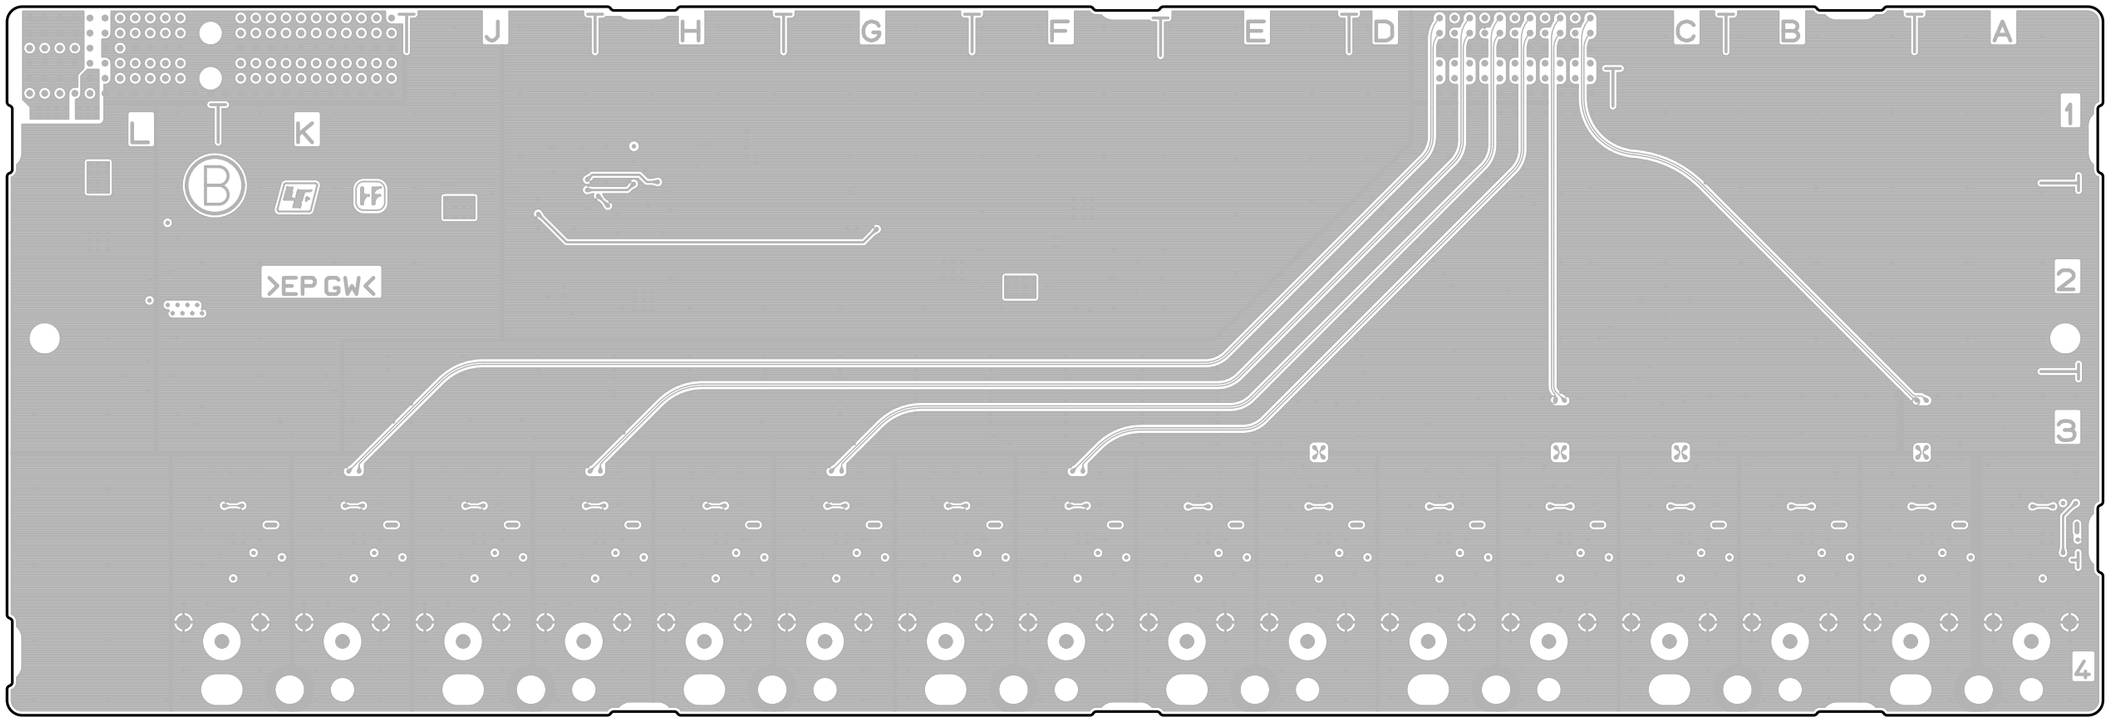

CNO-36 -B SIDE-
SUFFIX: -11

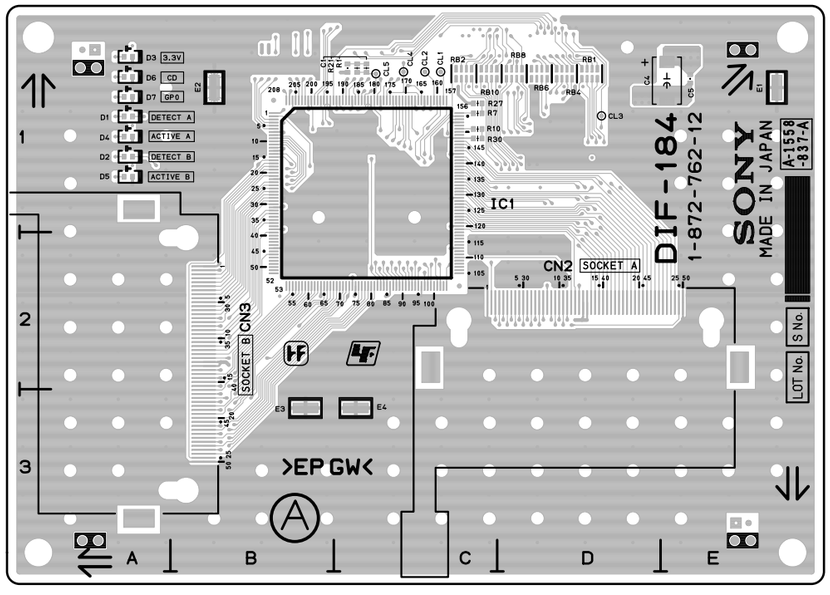

DIF-184 -A SIDE-
SUFFIX: -12

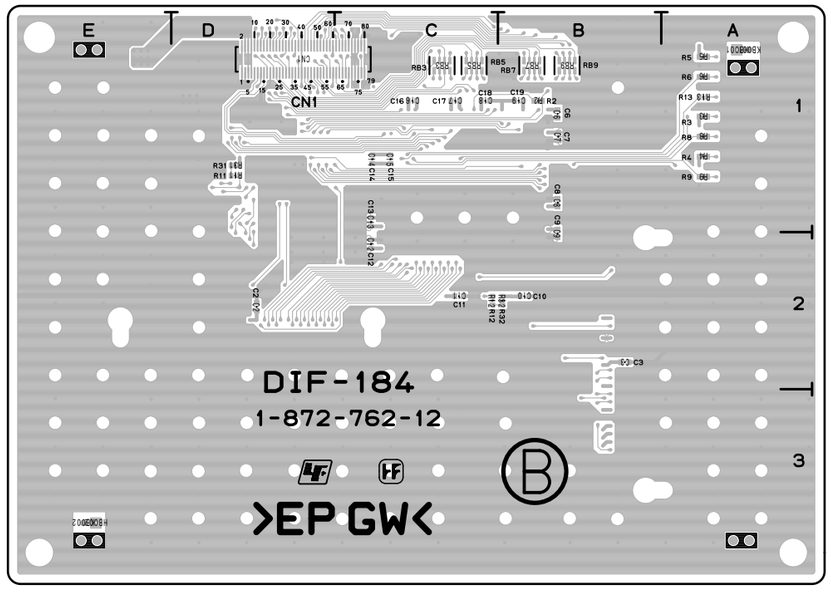

DIF-184 -B SIDE-
SUFFIX: -12

```
---------------------
DIF-184 (1-872-762-12)
---------------------
*:B SIDE


C1      C1    CN1    *D1    R7      C1
C2     *D2    CN2     D2    R8     *A1
C3     *B2    CN3     A2    R9     *A1
C4      E1                   R10     C1
C5      E1    D1      A1    R11    *D1
C6     *B1    D2      A1    R12    *C2
C7     *B1    D3      A1    R13    *A1
C8     *B1    D4      A1    R21     C1
C9     *B2    D5      A1    R27     C1
C10    *B2    D6      A1    R30     C1
C11    *C2    D7      A1    R31    *D1
C12    *C2                  R32    *B2
C13    *C1    E1      E1
C14    *C1    E2      B1    RB1     D1
C15    *C1    E3      B3    RB2     C1
C16    *C1    E4      C3    RB3    *C1
C17    *C1                  RB4     D1
C18    *C1    IC1     C1    RB5    *C1
C19    *B1                  RB6     D1
              R1      C1    RB7    *B1
CL1     C1    R2     *B1    RB8     D1
CL2     C1    R3     *A1    RB9    *B1
CL3     D1    R4     *A1    RB10    C1
CL4     C1    R5     *A1
CL5     C1    R6     *A1
```

DVP-49 (1-877-213-12)
---
*:B SIDE


C1	P1	C401	*J4	C1419	N5	C1716	*M3	C1927	*J5	C2213	*K9	C2350	*G11	C2533	K11	C2716	*M11	C2868	*M3	C2970	*H4	C3063	*J11	C3184	*M9	D701	A8	IC301	R12	Q209	*A3	R306	P12	R1001	*E7
C2	*P1	C402	*M4	C1420	N5	C1717	*M3	C1928	*J5	C2214	*J9	C2351	*G11	C2534	K11	C2717	*M11	C2869	*M4	C2971	*H4	C3064	*H10	C3185	*M9	D702	A8	IC302	R12	Q210	*A3	R307	P12	R1002	*E7
C101	N1	C403	*H4	C1421	N5	C1718	K3	C1929	*J5	C2215	*K9	C2352	*G11	C2535	*K11	C2718	M11	C2870	*L4	C2972	*H3	C3065	*J11	C3186	*M10	D703	A8	IC303	P12	Q211	*A3	R308	P12	R1003	*E7
C102	L1	C404	*E8	C1422	N5	C1719	K3	C1930	*J5	C2216	*K9	C2353	*G11	C2536	*K11	C2719	M11	C2871	*M3	C2973	*H4	C3066	*J10	C3187	*M10	D704	A8	IC304	P13	Q212	*A3	R309	P12	R1004	*E7
C103	J1	C405	*N9	C1423	N5	C1720	K3	C1931	*J5	C2217	*K8	C2354	*G11	C2537	L11	C2720	M11	C2872	*M4	C2974	*H4	C3067	*H10	C3188	*N10	D705	A7	IC305	M13	Q301	N12	R310	P12	R1005	*E8
C104	G1	C406	*H11	C1424	N5	C1721	*L3	C1932	*J5	C2218	*K8	C2401	H12	C2538	L11	C2721	*N11	C2873	*M4	C2975	*H3	C3068	*H10	C3201	*B8	D706	A8	IC306	M12			R311	P12	R1006	*E8
C105	E1	C407	B8	C1425	N4	C1722	*L3	C1933	*J5	C2219	*J8	C2402	*G12	C2539	*K12	C2722	*N11	C2874	*M3	C2976	*H4	C3069	*H10	C3202	*B8	D707	A8	IC307	N12	R1	*A2	R312	P12	R1007	*E8
C106	N1	C408	*A7	C1426	N4	C1723	*L3	C1934	*J5	C2220	*J8	C2403	*G12	C2540	*K12	C2723	*M11	C2875	*L4	C2977	*H4	C3070	*H11	C3203	*C8	D708	A8	IC401	*A7	R2	*A2	R313	P11	R1008	*E7
C107	L1	C501	*B9	C1427	N4	C1724	*L3	C2001	*G4	C2221	*J8	C2404	*G12	C2541	*K11	C2724	*M11	C2876	*L3	C2978	*J4	C3101	*L10	C3204	*B7	D709	A8	IC501	*B9	R3	*A2	R314	P12	R1009	*E8
C108	J1	C502	*B8	C1428	N4	C1725	*L3	C2002	*G4	C2222	*J9	C2405	*G12	C2542	*K12	C2725	*N11	C2877	*L3	C2979	*J3	C3102	*L8	C3205	*B8	D710	A8	IC502	R7	R101	*M2	R315	P11	R1010	*E8
C109	G1	C503	*B8	C1429	N4	C1726	*L3	C2003	*G4	C2223	*J9	C2406	G12	C2543	*K12	C2726	*N11	C2878	*L3	C2980	*H4	C3103	*N9	C3206	*C8	D711	A8	IC503	*A8	R102	*K2	R316	P12	R1011	*E7
C110	E1	C504	R7	C1430	N4	C1727	*L3	C2004	*G4	C2224	*J9	C2407	G12	C2544	*K12	C2727	*M11	C2879	*L4	C2981	*J5	C3104	*N10	C3207	*C8	D712	A8	IC504	*A9	R103	*H2	R317	P12	R1012	*C8
C111	N1	C505	*A10	C1431	N5	C1728	*L3	C2005	*G4	C2225	*J9	C2408	*H12	C2545	*K12	C2728	*M11	C2880	*M4	C2982	*H5	C3105	*M9	C3208	*C7	D713	A8	IC601	*E7	R104	*F2	R318	P12	R1101	A6
C112	L1	C506	*A8	C1432	N5	C1729	*L3	C2006	*G4	C2226	*J9	C2409	*H12	C2546	*K11	C2729	*N11	C2881	*L4	C2983	*H5	C3106	*M9	C3209	*B8	D714	A8	IC602	*E8	R105	*D2	R319	P12	R1102	A6
C113	J1	C507	*B8	C1433	N4	C1730	*L3	C2007	*G4	C2227	*J9	C2410	G13	C2547	*K11	C2730	*N11	C2882	*M4	C2984	*H5	C3107	*M9	C3210	*B8	D715	A8	IC603	*E8	R106	*M2	R320	P12	R1103	A6
C114	G1	C508	*B8	C1434	N4	C1731	*L3	C2008	*G4	C2228	J9	C2411	G13	C2548	*K11	C2731	*N11	C2883	*L4	C2985	*H5	C3108	*M9	C3211	*C8	D716	A8	IC604	P6	R107	*M2	R321	P11	R1104	A6
C115	D1	C509	*A9	C1435	N5	C1732	*L3	C2009	*G4	C2229	*K11	C2412	*G12	C2549	*K11	C2732	*N11	C2884	*L4	C2986	*H5	C3109	*N9	C3212	*C7	D717	A11	IC605	*F7	R108	*K2	R322	P11	R1105	A6
C116	N1	C510	*A10	C1436	N5	C1733	*L3	C2010	*G4	C2230	*K11	C2413	*G12	C2550	*K11	C2733	*N11	C2885	*L4	C2987	*J5	C3110	*M9	C3213	*C8	D718	A11	IC701	*D9	R109	*K2	R323	N12	R1106	*L4
C117	L1	C601	*E7	C1501	*M4	C1734	*L3	C2011	*G4	C2231	*K11	C2414	*G12	C2551	*K11	C2734	*N11	C2886	*L4	C2988	*H5	C3111	*M9	C3214	*B8	D719	A11	IC702	*E9	R110	*H2	R324	N12	R1107	*D8
C118	J1	C602	*E7	C1502	*M4	C1735	*L3	C2012	*G4	C2232	*K11	C2415	*G12	C2552	*K11	C2735	*N11	C2887	*M4	C2989	*H3	C3112	*M10	C3215	*B8	D720	A11	IC703	*E10	R111	*H2	R325	N12	R1108	B8
C119	G1	C603	*E8	C1503	*M4	C1736	*L3	C2013	*G4	C2233	K10	C2416	*G12	C2553	*K11	C2736	*N11	C2888	*M4	C2990	*G4	C3113	*N9	C3216	*C8			IC704	*B7	R112	*F2	R326	N12	R1109	*M10
C120	D1	C604	*E7	C1601	P9	C1737	*L3	C2014	*G4	C2234	K10	C2417	*G12	C2554	*K11	C2737	*M11	C2889	*L4	C2991	*J4	C3114	*M9	C3217	*B8	DD101	M1	IC705	*B8	R113	*C2	R327	P12	R1110	*D7
C121	N1	C605	*E8	C1602	P11	C1738	*L3	C2015	*G4	C2235	*K10	C2418	*G12	C2601	M9	C2738	*L11	C2901	*G3	C2992	*H4	C3115	*M9	C3218	*C8	DD102	K1	IC706	*A10	R114	*M2	R328	P13	R1111	*D7
C122	L1	C606	*E8	C1603	*P9	C1739	*M3	C2016	*G4	C2236	*K10	C2419	*G12	C2602	M8	C2739	*N11	C2902	*G4	C2993	*H5	C3116	*M9	C3219	*B7	DD103	H1	IC707	*A10	R115	*M2	R329	N12	R1112	*D7
C123	H1	C607	P6	C1604	*P11	C1801	*H3	C2017	*G4	C2237	L10	C2420	*H12	C2603	M8	C2801	*M5	C2903	*J3	C2994	*H4	C3117	*N9	C3220	C7	DD104	F1	IC708	*A11	R116	*K2	R330	N12	R1113	*D7
C124	F1	C608	P6	C1605	*P9	C1802	*H3	C2101	H9	C2238	L10	C2421	*H12	C2604	M8	C2802	*M4	C2904	*J5	C2995	*H4	C3118	*M9	C3221	*B7	DD105	D1	IC801	*C11	R117	*K2	R331	N12	R1114	*H4
C125	D1	C609	P6	C1606	*P11	C1803	*H3	C2102	*H9	C2239	*K11	C2422	*H12	C2605	M8	C2803	*L3	C2905	*J4	C2996	*H4	C3119	*M9	C3222	C7			IC802	*C11	R118	*H2	R332	N12	R1115	*H11
C126	N1	C610	P6	C1607	*P9	C1804	*H3	C2103	*H9	C2240	*K11	C2423	*H12	C2606	M8	C2804	*L5	C2906	*H4	C2997	*J4	C3120	*M9	C3223	D8	E1	B2	IC803	*C12	R119	*H2	R333	M13	R1116	*H11
C127	L1	C611	*F7	C1608	*P11	C1805	*H3	C2104	*H9	C2241	*K10	C2424	*H12	C2607	M8	C2805	*M4	C2907	*H4	C2998	*H4	C3121	*N10	C3224	D8	E2	G2	IC901	*C8	R120	*F2	R334	M12	R1201	*L4
C128	H1	C701	*D9	C1609	*P9	C1806	*H3	C2105	*H9	C2242	*K11	C2425	*H12	C2608	M8	C2806	*M4	C2908	*H4	C3001	*J10	C3122	*M10	C3225	*E8	E3	P2	IC1001	*E7	R121	*F2	R335	*N12	R1202	*H4
C129	F1	C702	*E9	C1610	*P11	C1807	*H3	C2106	H9	C2243	*K11	C2426	*H12	C2609	M8	C2807	*M4	C2909	*H4	C3002	*H11	C3123	*M10	C3226	*E8	E4	C8	IC1002	D7	R122	*C2	R336	N12	R1301	*H10
C130	D1	C703	*D9	C1611	P9	C1808	*H3	C2107	H9	C2244	*K11	C2427	*H12	C2610	M8	C2808	*M4	C2910	*H4	C3003	*H10	C3124	*M10	C3227	*E8	E5	E5	IC1003	*F8	R123	*C2	R337	N12	R1302	*M9
C131	L2	C704	*F9	C1612	P10	C1809	*H3	C2108	*H9	C2245	*K11	C2428	H12	C2611	M8	C2809	*M4	C2911	*H4	C3004	*J11	C3125	*M9	C3228	*E8	E6	R9	IC1004	E7	R124	*A4	R338	N12	R1401	N4
C132	J2	C705	*F9	C1613	P9	C1810	*H3	C2109	*G9	C2246	*K10	C2429	*H12	C2612	M7	C2810	*L4	C2912	*J4	C3005	*H10	C3126	*M10	C3229	*E8	E7	P5	IC1005	E7	R125	*A4	R339	N12	R1402	N4
C133	G2	C706	*F10	C1614	P10	C1811	*H3	C2110	H8	C2247	*K10	C2430	*H12	C2613	M7	C2811	*L4	C2913	*J4	C3006	*H11	C3127	*M10	C3230	*E8	E8	D13	IC1006	E6	R126	*A3	R340	N12	R1403	*N4
C134	E2	C707	*F10	C1615	P9	C1812	*H3	C2111	H8	C2248	*K10	C2431	*H12	C2614	*M8	C2812	*M4	C2914	*H4	C3007	*H10	C3128	*M9	C3231	*E8	E9	K13	IC1007	E6	R127	*A3	R341	N12	R1404	*N4
C135	C2	C708	*E9	C1616	P10	C1813	*H3	C2112	*H9	C2249	*K10	C2432	*H12	C2615	M8	C2813	*M4	C2915	*H4	C3008	*H11	C3129	*M10	C3232	*E8	E10	R13	IC1101	*B6	R128	*A2	R342	N12	R1405	*N4
C136	*L2	C709	*E9	C1617	P9	C1814	*H3	C2113	*H9	C2250	*K10	C2433	H12	C2616	L8	C2814	*M4	C2916	*H4	C3009	*H10	C3130	*N9	C3233	*E8	E11	*B2	IC1102	*A6	R129	*R1	R343	N12	R1406	*N4
C137	*J2	C710	*E10	C1618	P10	C1815	*H3	C2114	*H9	C2251	*K10	C2434	H12	C2617	M8	C2815	*M4	C2917	*H4	C3010	*H11	C3131	*M9	C3234	*E8	E12	*P1	IC1103	*B6	R130	*R1	R344	N12	R1407	N4
C138	*G2	C711	*E10	C1619	P9	C1816	*H3	C2115	*H9	C2252	*K10	C2435	*J12	C2618	L8	C2816	*L4	C2918	*H4	C3011	*J10	C3132	*M10	C3235	D8	E13	*A6	IC1104	*B6	R133	C6	R345	N12	R1408	N5
C139	*E2	C712	*A8	C1620	P11	C1817	*H3	C2116	*H9	C2253	*K10	C2436	*J12	C2619	*M8	C2817	*M4	C2919	*H4	C3012	*H10	C3133	*M10	C3236	D8	E14	*G5	IC1105	*D7	R134	C6	R346	N12	R1409	N5
C140	*C2	C713	*A8	C1621	P9	C1818	F3	C2117	*H8	C2254	*K10	C2437	H13	C2620	M8	C2818	*L4	C2920	*H4	C3013	*H10	C3134	*M10			E15	*M6	IC1106	*D7	R135	C6	R347	N12	R1410	*N5
C146	C7	C714	*A10	C1622	P11	C1819	*J3	C2118	*H8	C2301	G10	C2438	H13	C2621	L8	C2819	*M4	C2921	*J4	C3014	*H10	C3135	*N9	CL301	P11	E16	*G9	IC1401	*N4	R136	C6	R348	N12	R1411	*N5
C147	C6	C715	*A10	C1623	P10	C1820	F4	C2119	*H8	C2302	*G10	C2439	*H12	C2622	M8	C2820	*L4	C2922	*H4	C3015	*H10	C3136	*M10	CL401	*K4	E17	*L11	IC1402	*N5	R137	C6	R401	*J4	R1412	*N5
C148	C7	C716	*B11	C1624	*P10	C1821	*J3	C2120	*H8	C2303	*G10	C2440	*H12	C2623	L8	C2821	*M5	C2923	*J4	C3016	*H11	C3137	*M10	CL402	*K4	E18	*A12	IC1403	*N4	R138	*A4	R402	*M4	R1413	*N5
C149	C7	C801	*B11	C1625	*P10	C1822	*J3	C2121	*G8	C2304	*G10	C2441	*H12	C2624	M8	C2822	*L4	C2924	*J4	C3017	*H11	C3138	*M9	CL403	*K4	E19	*F12	IC1601	P9	R201	*A5	R403	*H4	R1414	N5
C201	*A4	C802	*B11	C1626	*P10	C1823	*J3	C2122	*H9	C2305	*G10	C2442	*H12	C2625	L8	C2823	*M4	C2925	*J4	C3018	*H11	C3139	*M10	CL404	*K4	E20	*R9	IC1602	P11	R202	*A5	R404	*E8	R1415	N4
C202	*A3	C803	*B12	C1627	*P10	C1824	*J3	C2123	*G9	C2306	G10	C2443	*H12	C2626	M8	C2824	*M4	C2926	*H4	C3019	*H10	C3140	*M9	CL405	*J4	E21	A5	IC1603	P10	R203	*A4	R405	*N9	R1416	N5
C203	*A3	C901	C8	C1628	P10	C1825	*J3	C2124	*H9	C2307	G10	C2444	*H12	C2627	M9	C2825	*M4	C2927	*H4	C3020	*H11	C3141	*M10	CL406	*J4			IC1604	P8	R204	*A5	R406	*H11	R1417	*N4
C301	P12	C902	*C8	C1629	P10	C1826	*J3	C2125	*G9	C2308	*G11	C2445	*H12	C2628	N9	C2826	*M4	C2928	*H4	C3021	*H10	C3142	*M10	CL407	*G4	F1	R1	IC1605	P8	R205	*A5	R407	B8	R1418	*N4
C302	P12	C903	*C8	C1630	P10	C1827	*J3	C2126	*H9	C2309	*G11	C2446	*H12	C2629	N8	C2827	*L4	C2929	*H4	C3022	*H10	C3143	*M10	CL408	*G4	F101	N1	IC1701	M3	R206	*A5	R408	*A7	R1419	*N4
C303	P11	C904	*C8	C1631	P10	C1828	*J3	C2127	*G9	C2310	F10	C2447	*J12	C2630	N8	C2828	*L4	C2930	*J4	C3023	*J10	C3144	*M10	CL409	*H5	F102	L1	IC1702	K3	R207	*A4	R409	*A7	R1420	*N4
C304	P11	C1001	*E7	C1632	P10	C1829	*J3	C2128	J9	C2311	F10	C2448	*J12	C2631	N8	C2829	*L4	C2931	*J4	C3024	*J11	C3145	*M10	CL410	*H5	F103	J1	IC1703	L3	R208	*A4	R501	B9	R1421	N5
C305	P12	C1002	D7	C1633	P10	C1830	*J3	C2129	*J9	C2312	*G10	C2449	*J12	C2632	N8	C2830	*M4	C2932	*H4	C3025	*H11	C3146	*M9	CL411	*H11	F104	G1	IC1801	H3	R209	*A5	R502	C10	R1501	*M4
C306	P12	C1003	*F8	C1634	P8	C1831	*J3	C2130	*J9	C2313	*G10	C2450	*J12	C2633	N8	C2831	*M4	C2933	*H4	C3026	*H10	C3147	*M9	CL412	*H11	F105	E1	IC1802	J3	R210	*A5	R503	*B9	R1502	*M4
C307	P12	C1004	E7	C1635	P9	C1832	*J3	C2131	*J9	C2314	*G10	C2451	*J12	C2634	N8	C2832	*M4	C2934	*H4	C3027	*H10	C3148	*M9	CL413	*H11			IC1803	F4	R211	*A5	R504	*B9	R1503	*M4
C308	P12	C1005	E7	C1636	*P8	C1833	F4	C2132	*J9	C2315	*G10	C2452	*J12	C2635	N8	C2833	*L4	C2935	*H5	C3028	*J11	C3149	*M9	CL414	*M9	FB301	N12	IC1901	H5	R212	*A4	R505	R7	R1504	*J4
C309	P12	C1006	E6	C1637	*P9	C1834	*J3	C2133	J9	C2316	*G10	C2453	*J12	C2636	N8	C2834	*L4	C2936	*H4	C3029	*H10	C3150	*M10	CL415	*M9	FB1401	N4	IC1902	J5	R213	*A4	R506	R7	R1506	*H10
C310	R12	C1007	E6	C1638	*P8	C1835	*J3	C2134	J9	C2317	*G10	C2454	*J12	C2637	N8	C2835	*L4	C2937	*H4	C3030	*J11	C3151	*M9	CL416	*N10	FB1402	N4	IC2001	G4	R214	*A4	R507	*A10	R1507	*M10
C311	R12	C1101	*B6	C1639	*P9	C1836	*J3	C2135	*H9	C2318	*G10	C2501	J12	C2638	N8	C2836	*L4	C2938	*H5	C3031	*H10	C3152	*M10	CL417	*N10	FB1403	N5	IC2101	H9	R215	*A4	R508	*A9	R1601	P9
C312	*P12	C1102	*C6	C1640	*P8	C1837	*J3	C2136	*H9	C2319	*G10	C2502	*J12	C2639	N7	C2837	*M4	C2939	*J5	C3032	*H10	C3153	*M10	CL418	*L10	FB1404	N5	IC2102	J9	R216	*A4	R509	*A10	R1602	P11
C313	N12	C1103	*B6	C1641	*P8	C1838	*J3	C2137	J8	C2320	*G11	C2503	*J12	C2640	N7	C2838	*L5	C2940	*J5	C3033	*H10	C3154	*N10	CL419	*L10	FB1405	N4	IC2201	J9	R217	*A4	R510	*A9	R1603	P9
C314	N12	C1104	*B6	C1642	*P8	C1839	*G3	C2138	J8	C2321	*G11	C2504	*J12	C2641	*N8	C2839	*L4	C2941	*H4	C3034	*H11	C3155	*M10	CL1701	*K3	FB1406	N5	IC2202	K10	R218	*A4	R511	*A9	R1604	P11
C315	P12	C1105	*B6	C1643	*P8	C1840	*G5	C2139	*J9	C2322	*G11	C2505	*J12	C2642	M8	C2840	*L5	C2942	*H4	C3035	*H10	C3156	*M10	CL1801	*F4	FB1601	*P9	IC2301	G10	R219	*A3	R512	*C10	R1605	*P9
C316	P12	C1106	*B6	C1644	P8	C1841	*J5	C2140	*J9	C2323	*G11	C2506	J12	C2643	M8	C2841	*L4	C2943	*H4	C3036	*H10	C3157	*M9	CL2701	*M11	FB1602	*P11	IC2302	G11	R220	*A3	R513	*A9	R1606	*P11
C317	P11	C1107	*B6	C1645	P8	C1901	*H5	C2141	*J9	C2324	*G11	C2507	J12	C2644	M8	C2842	*L4	C2944	*J4	C3037	*H11	C3158	*N9			FB1603	*P9	IC2401	G12	R221	*A3	R514	*A9	R1607	P10
C318	P11	C1108	*C6	C1646	P8	C1902	*H5	C2142	*J9	C2325	*G11	C2508	*J12	C2645	M8	C2843	*L4	C2945	*J4	C3038	*J10	C3159	*N9	CN501	C9	FB1604	*P11	IC2402	H12	R222	*A4	R601	*E7	R1608	P10
C319	P12	C1109	*D7	C1647	P8	C1903	*H5	C2143	*J9	C2326	*G11	C2509	*J12	C2646	*N8	C2844	*M4	C2946	*H4	C3039	*J11	C3160	*M9	CN502	A8	FB1605	*P10	IC2501	J12	R223	*A4	R602	*E7	R1609	*P10
C320	P12	C1110	*D7	C1648	P8	C1904	*H6	C2144	*J8	C2327	*G11	C2510	J13	C2647	M8	C2845	*M4	C2947	*H4	C3040	*J10	C3161	*L10	CN1101	A6	FB1606	*P10	IC2502	K11	R224	*A4	R603	*E8	R1610	P8
C321	P11	C1201	*L4	C1649	P8	C1905	*H6	C2145	*J8	C2328	G11	C2511	J13	C2648	M8	C2846	*M4	C2948	*H4	C3041	*J10	C3162	*L10			FB1607	*P8	IC2601	M8	R225	*A3	R604	*E7	R1611	P9
C322	P13	C1202	*H4	C1650	P8	C1906	*H5	C2146	*J8	C2329	*G11	C2512	*J12	C2649	M8	C2847	*M4	C2949	*H4	C3042	*H10	C3163	*N9	CNT1	R2	FB1608	*P9	IC2602	N8	R226	*A3	R605	*E8	R1612	P8
C323	P13	C1301	*H10	C1651	P8	C1907	*H5	C2147	*H8	C2330	*G11	C2513	*J12	C2650	M8	C2848	*M5	C2950	*H4	C3043	*H11	C3164	*N10	CNV1	R4	FB1609	*P8	IC2701	M11	R227	*A3	R606	*E8	R1613	P9
C324	P13	C1302	*M9	C1652	P8	C1908	*H5	C2148	*H8	C2331	*G11	C2514	*J12	C2651	M8	C2849	*L4	C2951	*J3	C3044	*H11	C3165	*M9	CNW1	R6	FB1610	*P8	IC2702	M11	R228	*A3	R607	*E7	R1614	*P8
C325	N12	C1401	N3	C1653	P9	C1909	*H5	C2149	*H9	C2332	*G11	C2515	*J12	C2652	M8	C2850	*L4	C2952	*H4	C3045	*J10	C3166	*M10	CNZ1	R12	FB1701	K3	IC2703	N11	R229	*A4	R608	*D8	R1615	*P9
C326	N12	C1402	N3	C1654	P8	C1910	*H5	C2150	*H9	C2333	G11	C2516	*J12	C2653	N8	C2851	*L4	C2953	*H4	C3046	*J11	C3167	*L11			FB1801	F4			R230	*A3	R609	*D8	R1701	*M3
C327	N12	C1403	N4	C1655	P9	C1911	*H5	C2151	*H9	C2334	G11	C2517	*J12	C2654	N9	C2852	*L4	C2954	*H4	C3047	*J10	C3168	*M11	D1	*R1	FB2701	M11	L301	P11	R231	*A3	R610	*D7	R1702	K3
C328	N12	C1404	N4	C1701	*M3	C1912	*H5	C2152	*H9	C2335	*G11	C2518	*J12	C2701	*M11	C2853	*L4	C2955	*H4	C3048	*H11	C3169	*M9	D2	A2	FB2801	*L4			R232	*A3	R701	*D10	R1703	K3
C329	M13	C1405	N4	C1702	*M3	C1913	*H5	C2153	*H9	C2336	*G11	C2519	*J12	C2702	*M11	C2854	*L4	C2956	*H4	C3049	*H10	C3170	*M9	D101	*R1	FB2901	*G3	Q101	*M2	R233	*A3	R702	*D10	R1704	L3
C330	M12	C1406	N4	C1703	*M3	C1914	*H5	C2154	*H9	C2337	F11	C2520	*J12	C2703	*M11	C2855	*L4	C2957	*H5	C3050	*J10	C3171	*M10	D102	C7	FB3001	*J11	Q102	*K2	R234	*A3	R703	*D9	R1705	K3
C331	M12	C1407	N4	C1704	*M3	C1915	*H5	C2201	K10	C2338	F11	C2521	*J12	C2704	*M11	C2856	*L4	C2958	*G3	C3051	*J11	C3172	*N10	D201	A5	FB3101	*N9	Q103	*H2	R235	*A3	R704	*E10	R1706	*L3
C332	M12	C1408	N4	C1705	*M3	C1916	*H5	C2202	*K9	C2339	*G11	C2522	*J12	C2705	*M11	C2857	*L4	C2959	*G3	C3052	*H11	C3173	*N10	D202	A4			Q104	*F2	R236	*A3	R705	*E9	R1801	*H3
C333	M13	C1409	N4	C1706	*M3	C1917	*H5	C2203	*K9	C2340	*G11	C2523	*J12	C2706	*M11	C2858	*L4	C2960	*J4	C3053	*H10	C3174	*M10	D203	A4	IC1	L4	Q105	*D2	R237	*A3	R706	*E10	R1802	*J3
C334	M13	C1410	N4	C1707	*M3	C1918	*J5	C2204	*K9	C2341	*G11	C2524	*J12	C2707	*M11	C2859	*L4	C2961	*G5	C3054	*H11	C3175	*M10	D204	A3	IC2	H4	Q106	*R1	R238	*A3	R707	*E10	R1803	F3
C335	*N12	C1411	N4	C1708	*M3	C1919	*J5	C2205	*K9	C2342	*G11	C2525	*J12	C2708	*M11	C2860	*L4	C2962	*G4	C3055	*H11	C3176	*M10	D205	A3	IC3	H10	Q201	*A5	R239	*A3	R801	*C11	R1804	F3
C336	N12	C1412	N4	C1709	*M3	C1920	*J5	C2206	J9	C2343	*G11	C2526	*J12	C2709	*M11	C2861	*M4	C2963	*J5	C3056	*J11	C3177	*M10	D206	A3	IC4	M9	Q202	*A5	R240	*A3	R802	*C11	R1805	F4
C337	N12	C1413	N5	C1710	*M3	C1921	*J6	C2207	J9	C2344	*G11	C2527	*J12	C2710	*M11	C2862	*L5	C2964	*J3	C3057	*H10	C3178	*M10	D401	A7	IC5	B8	Q203	*A4	R241	*A3	R804	*C11	R1806	F4
C338	N12	C1414	N5	C1711	*M3	C1922	*J6	C2208	*J9	C2345	*G11	C2528	K11	C2711	*M11	C2863	*K3	C2965	*H4	C3058	*J10	C3179	*M10	D402	A7	IC6	E8	Q204	*A4	R301	P12	R805	*C12	R1901	*H5
C339	N12	C1415	N5	C1712	*M3	C1923	*J5	C2209	*J9	C2346	*G11	C2529	*K12	C2712	*M11	C2864	*M5	C2966	*H4	C3059	*J11	C3180	*M10	D601	A12	IC103	C6	Q205	*A4	R302	R12	R901	C8	R1902	*J5
C340	N12	C1416	N5	C1713	*M3	C1924	*J5	C2210	J8	C2347	*G11	C2530	*K12	C2713	*M11	C2865	*L4	C2967	*H3	C3060	*H10	C3181	*N9	D602	A12	IC201	*A4	Q206	*A4	R303	R12	R902	B8	R2001	*G4
C341	M12	C1417	N5	C1714	*M3	C1925	*J5	C2211	J8	C2348	*G11	C2531	*K12	C2714	*M11	C2866	*L4	C2968	*H5	C3061	*H11	C3182	*N10	D603	A12	IC202	*A4	Q207	*A4	R304	P12	R903	*C8	R2101	H10
C342	N12	C1418	N5	C1715	*M3	C1926	*J5	C2212	*K9	C2349	*G11	C2532	*K12	C2715	*M11	C2867	*L3	C2969	*H4	C3062	*J11	C3183	*M9	D604	A11	IC203	*A3	Q208	*A3	R305	R12	R904	*C8	R2102	H9

R2103	H9	RB601	P6	RB1210	K5	RB1409	*N5	RB2413	*H12
R2104	J9	RB602	P6	RB1211	K5	RB1410	*N5	RB2414	*H12
R2105	J9	RB603	P6	RB1212	K5	RB1411	*N5	RB2415	*H12
R2201	J10	RB604	P6	RB1213	K5	RB1412	*N5	RB2416	*H12
R2202	K9	RB605	P6	RB1214	K5	RB1413	*N4	RB2417	*H12
R2203	K10	RB606	P6	RB1215	K5	RB1414	*N4	RB2418	*H12
R2204	K11	RB607	*E8	RB1216	K5	RB1415	*N4	RB2419	*H12
R2205	J9	RB608	*D8	RB1217	K5	RB2101	*H8	RB2420	*H12
R2301	H11	RB609	P6	RB1218	K5	RB2102	*H9	RB2421	*H12
R2302	G10	RB610	P6	RB1219	K5	RB2103	*H9	RB2422	*H12
R2303	G10	RB611	P6	RB1220	K5	RB2104	*H9	RB2423	*H12
R2304	G11	RB612	*F7	RB1221	K5	RB2105	*H9	RB2424	*H12
R2305	G11	RB613	*F7	RB1222	K5	RB2106	*H9	RB2501	*J12
R2401	H11	RB614	*E7	RB1223	K5	RB2107	*H9	RB2502	*J12
R2402	G12	RB701	*E9	RB1224	K5	RB2108	*H9	RB2503	*J12
R2403	H12	RB702	*E9	RB1225	K5	RB2109	*H9	RB2504	*J12
R2404	H12	RB703	*E9	RB1226	K5	RB2110	*H8	RB2505	*J12
R2405	H12	RB704	*E9	RB1227	K5	RB2111	*H9	RB2506	*J12
R2501	J11	RB705	*E10	RB1228	K5	RB2112	*H9	RB2507	*J12
R2502	J12	RB706	*E10	RB1229	K5	RB2113	*H8	RB2508	*J12
R2503	J12	RB707	*E10	RB1230	K5	RB2114	*H9	RB2509	*J12
R2504	K11	RB708	*E10	RB1231	*L5	RB2115	*H9	RB2510	*J12
R2505	K11	RB709	*F9	RB1232	*L5	RB2116	*H9	RB2511	*J12
R2601	M9	RB710	*F9	RB1233	*L5	RB2117	*H9	RB2512	*J12
R2602	M9	RB711	*F9	RB1234	*L5	RB2118	*H9	RB2513	*K11
R2603	M8	RB712	*F9	RB1235	*L5	RB2119	*J9	RB2514	*K11
R2604	M7	RB713	*F10	RB1236	*L5	RB2120	*J9	RB2515	*K11
R2605	M8	RB714	*F10	RB1237	*L5	RB2121	*J9	RB2516	*K11
R2606	M7	RB715	*F10	RB1238	*L5	RB2122	*J8	RB2517	*K11
R2607	*M8	RB716	*F10	RB1239	*K4	RB2123	*J9	RB2518	*K11
R2608	*M8	RB717	*F10	RB1240	*K4	RB2124	*J9	RB2519	*K11
R2609	N9	RB718	*F9	RB1241	*K4	RB2201	*J8	RB2520	*K11
R2610	N9	RB719	*F10	RB1242	*K4	RB2202	*J9	RB2521	*K11
R2611	N8	RB720	*F9	RB1243	*K4	RB2203	*J9	RB2522	*K11
R2612	N7	RB721	*F10	RB1244	*K4	RB2204	*J9	RB2523	*K11
R2613	N8	RB722	*F9	RB1245	*K4	RB2205	*J9	RB2524	*K11
R2614	N7	RB723	*F10	RB1246	*K4	RB2206	*J9	RB2601	*M8
R2615	*M8	RB724	*F9	RB1301	K9	RB2207	*K9	RB2602	*M8
R2616	*N8	RB725	*A10	RB1302	K9	RB2208	*K9	RB2603	*M8
R2701	*M11	RB726	*A7	RB1303	K9	RB2209	*K9	RB2604	*M8
R2702	M11	RB727	*A7	RB1304	K9	RB2210	*K8	RB2605	*N8
R2703	M11	RB728	*A8	RB1305	K9	RB2211	*K9	RB2606	*N8
R2704	M11	RB729	*A8	RB1306	K9	RB2212	*K9	RB2607	*N8
R2705	M11	RB730	*A10	RB1307	K9	RB2213	*K10	RB2608	*N8
R2706	*N11	RB731	*A10	RB1308	K9	RB2214	*K10		
R2801	M3	RB732	*A11	RB1309	K9	RB2215	*K10	S501	A9
R2802	M3	RB901	*C8	RB1310	K9	RB2216	*K10	S601	A9
R2803	L3	RB902	*C8	RB1311	K9	RB2217	*K10	S701	A10
R2804	L3	RB903	*C8	RB1312	K9	RB2218	*K10		
R2805	*M4	RB904	*C8	RB1313	K9	RB2219	*K11	TP1	A2
R2806	*M4	RB905	*C8	RB1314	K9	RB2220	*K11	TP101	A4
R2807	*L4	RB906	*C8	RB1315	K9	RB2221	*K11	TP102	A4
R2808	*L4	RB907	*C8	RB1316	K9	RB2222	*K11	TP103	A3
R2901	*H5	RB908	*C7	RB1317	K9	RB2223	*K11	TP104	A3
R2902	*H5	RB909	*C7	RB1318	K9	RB2224	*K11	TP105	A2
R2903	J3	RB910	*C7	RB1319	K9	RB2301	*F10	TP106	A4
R2904	H3	RB911	*C7	RB1320	K9	RB2302	*G10	TP301	C13
R2905	H5	RB912	*C8	RB1321	K9	RB2303	*G10	TP302	C13
R2906	H5	RB1001	*E7	RB1322	K8	RB2304	*G10	TP303	C13
R2907	*H3	RB1002	D7	RB1323	L9	RB2305	*G10	TP304	B13
R2908	*H3	RB1003	D7	RB1324	L9	RB2306	*G10	TP305	B13
R2909	*H4	RB1004	*F8	RB1325	L9	RB2307	*G10	TP401	B8
R2910	*H5	RB1005	*F8	RB1326	L9	RB2308	*G10	TP701	A11
R2911	*H4	RB1006	E7	RB1327	L9	RB2309	*G10	TP702	A11
R2912	*H4	RB1007	E7	RB1328	L9	RB2310	*F10	TP703	A10
R2913	*H5	RB1008	E7	RB1329	L9	RB2311	*G10	TP704	A10
R2914	*H5	RB1009	E7	RB1330	L8	RB2312	*G10	TP901	C8
R2915	*H4	RB1010	E6	RB1331	*H10	RB2313	*F11		
R2916	*H4	RB1011	E6	RB1332	*H10	RB2314	*G11		
R2917	*H4	RB1012	E6	RB1333	*H10	RB2315	*G11		
R2918	*H4	RB1013	E6	RB1334	*H10	RB2316	*G11		
R3101	M10	RB1014	*B7	RB1335	*H10	RB2317	*G11		
R3102	M10	RB1015	*L5	RB1336	*J10	RB2318	*G11		
R3103	N10	RB1016	*G4	RB1337	*J10	RB2319	*G11		
R3104	N10	RB1017	*J11	RB1338	*J10	RB2320	*G11		
R3105	*M10	RB1018	*N9	RB1339	*L8	RB2321	*G11		
R3106	*M10	RB1101	*C6	RB1340	*L9	RB2322	*F11		
R3107	*M10	RB1102	*C6	RB1341	*L9	RB2323	*G11		
R3108	*M10	RB1103	*B6	RB1342	*L9	RB2324	*G11		
		RB1104	*B6	RB1343	*L9	RB2401	*H12		
RB301	P12	RB1105	*B6	RB1344	*L9	RB2402	*H12		
RB302	P13	RB1106	*C6	RB1345	*L9	RB2403	*H12		
RB303	P13	RB1201	K5	RB1346	*L9	RB2404	*H12		
RB304	M13	RB1202	K5	RB1401	*N4	RB2405	*H12		
RB305	M13	RB1203	K5	RB1402	*N4	RB2406	*H12		
RB306	M13	RB1204	K5	RB1403	*N4	RB2407	*G12		
RB307	M13	RB1205	K5	RB1404	*N4	RB2408	*G12		
RB308	M12	RB1206	K5	RB1405	*N3	RB2409	*G12		
RB309	M12	RB1207	K5	RB1406	*N5	RB2410	*G12		
RB310	M12	RB1208	K5	RB1407	*N5	RB2411	*G12		
RB311	M12	RB1209	K5	RB1408	*N5	RB2412	*G12		

Components locations list; previous page

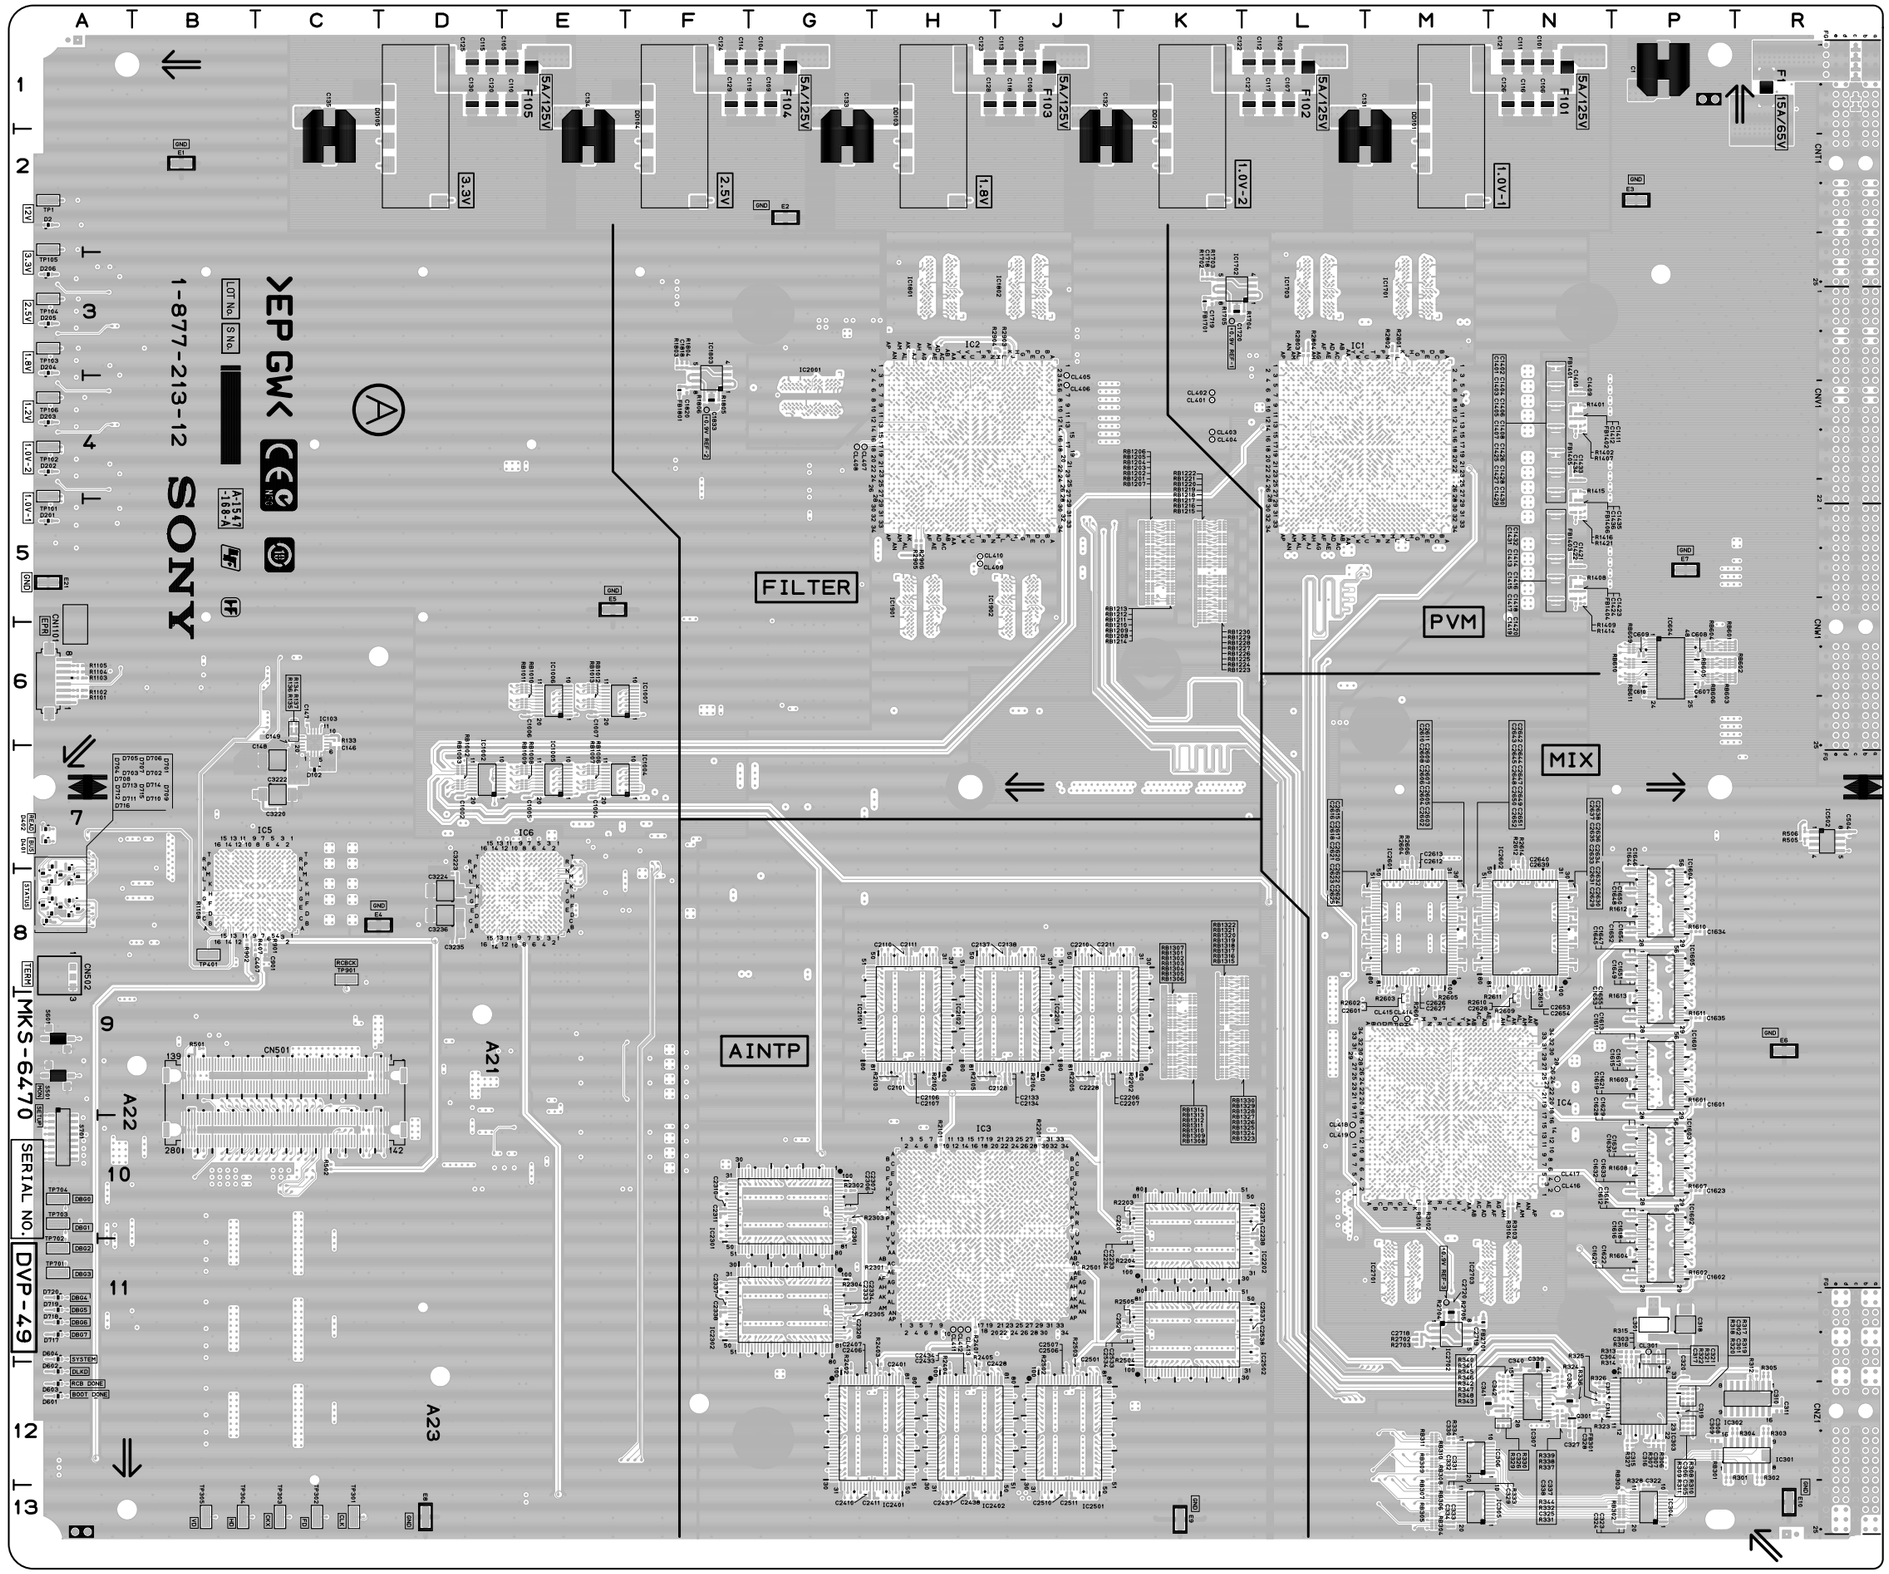

DVP-49 -A SIDE-
SUFFIX: -12

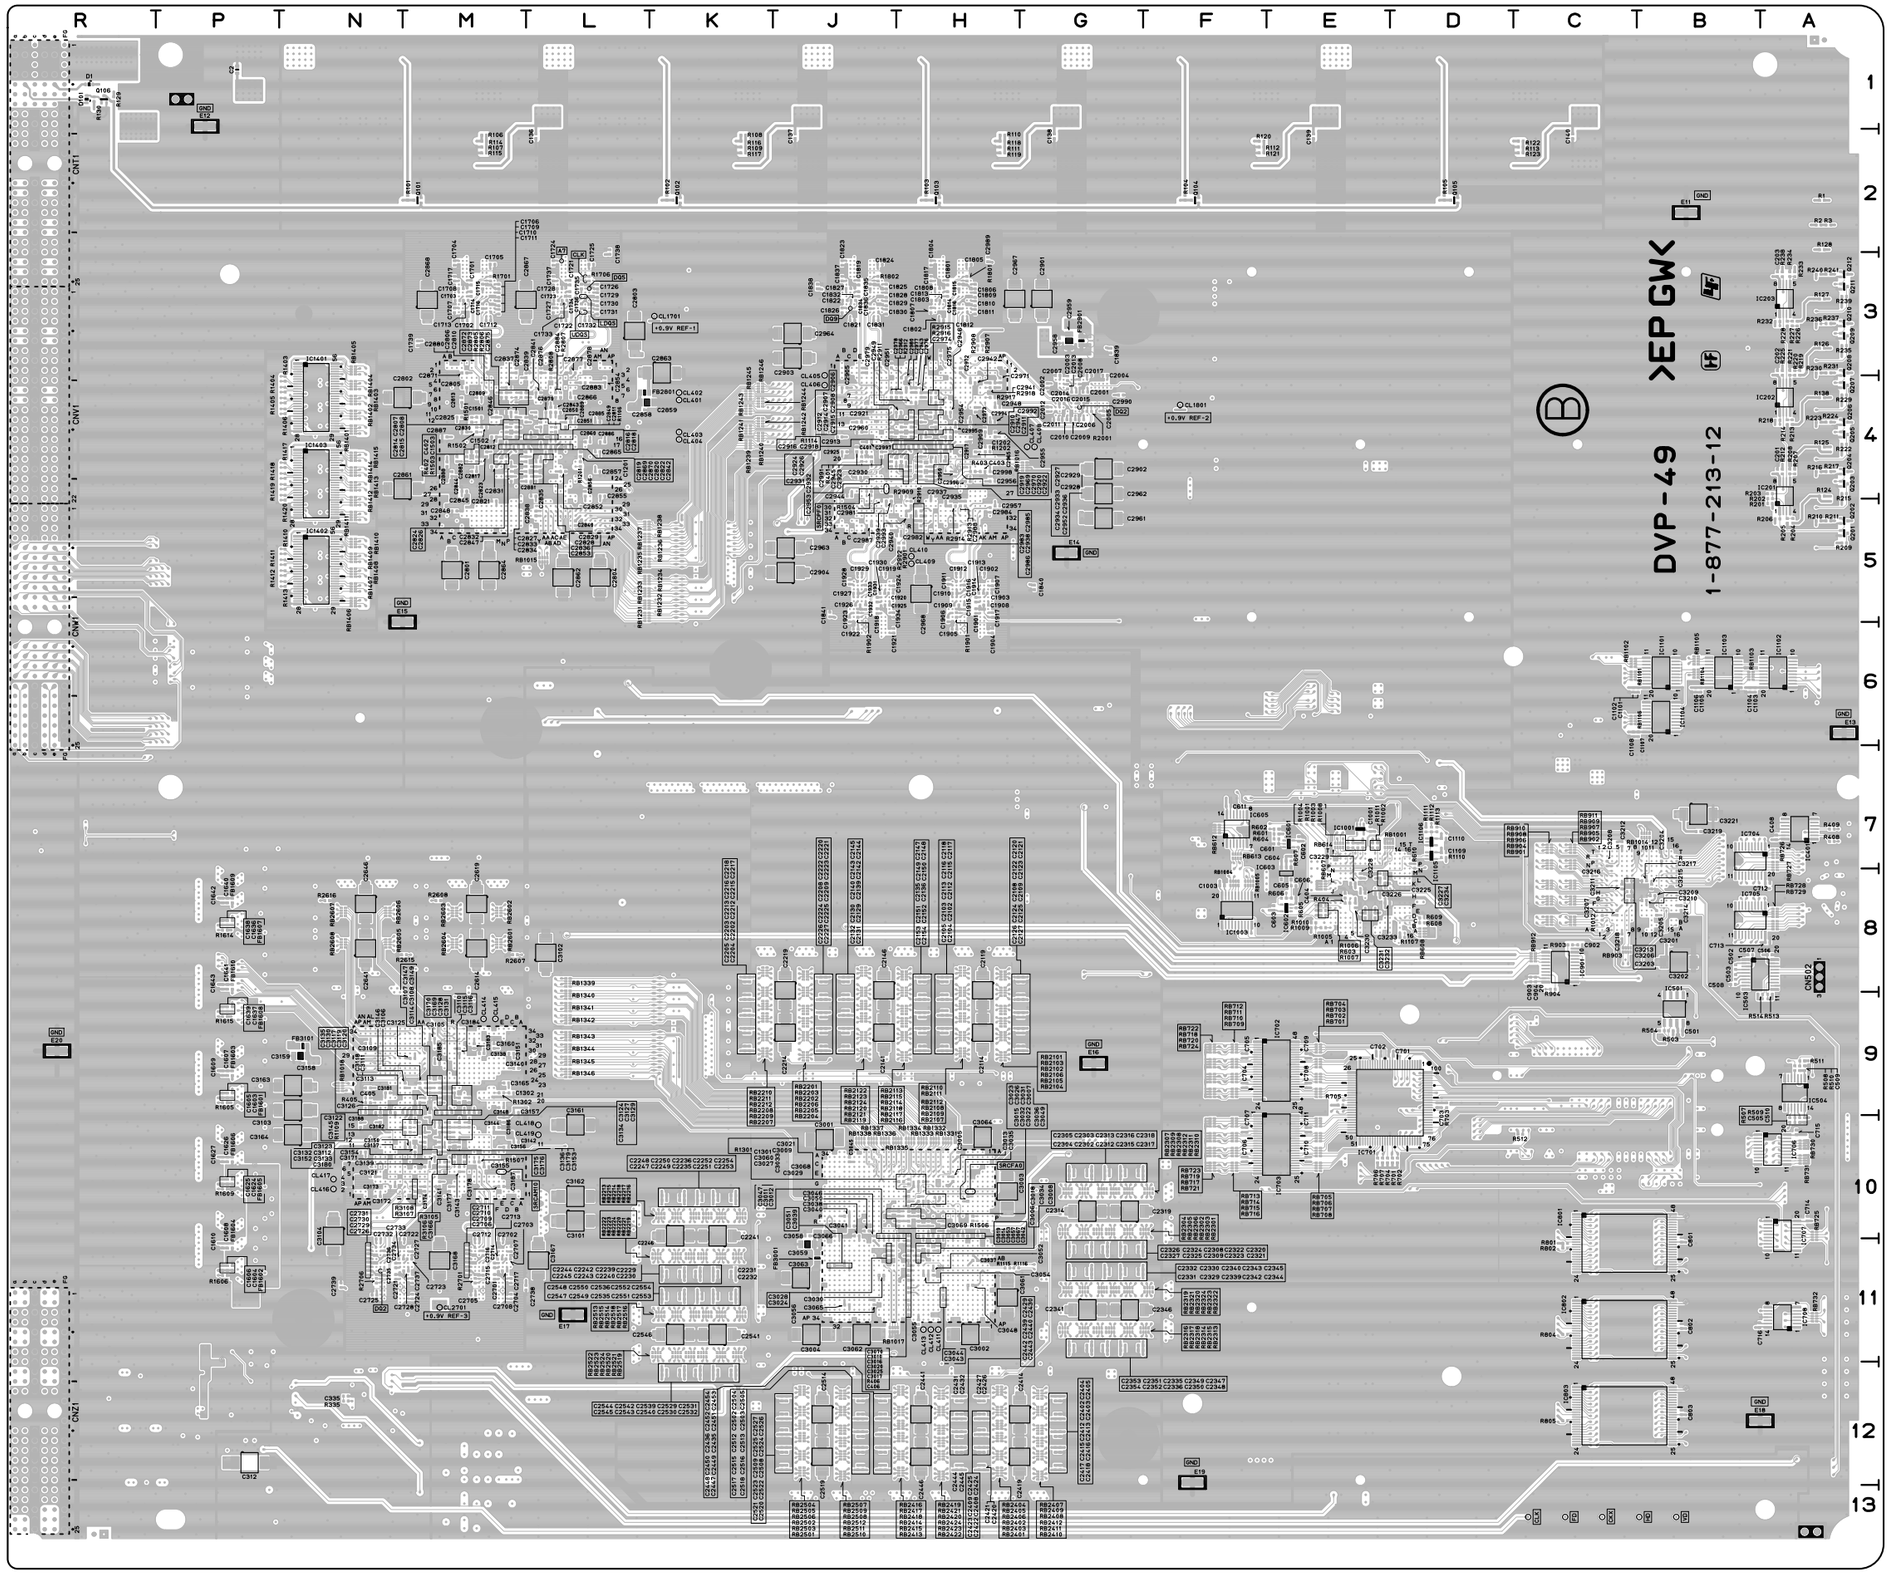


DVP-49 -B SIDE-
SUFFIX: -12

FC-109 (1-871-702-11)
---
*:B SIDE


C201	*P1	C409	*M12	C823	*J9	C1423	P3	C1574	*H5	C1765	*F5	C1956	*F10	C2147	*H10	C2338	*D5	C2529	*C5	C2720	*B11	C2911	*D11	C3103	*M5	C3199	*N5	C3295	*N8	C4051	*F8	C4529	*D8	CL603	P10	CL2222	H10
C202	*P1	C410	*M11	C824	*J9	C1424	*R2	C1575	*H5	C1766	*G5	C1957	*F10	C2148	*H10	C2339	*D5	C2530	*C5	C2721	*B11	C2912	*D10	C3104	*L4	C3200	*N5	C3296	*N8	C4052	*F8	C4530	*C8	CL701	*M6	CL2223	*H10
C203	R1	C411	P12	C825	*K8	C1425	P2	C1576	*H5	C1767	*G5	C1958	*F11	C2149	*H10	C2340	*D5	C2531	*B6	C2722	*B11	C2913	*D10	C3105	*L6	C3201	*M5	C3297	*M8	C4053	*H7	C4531	*D7	CL702	*M8	CL2224	G10
C204	*R1	C412	*M12	C826	*K8	C1426	P2	C1577	*H5	C1768	*G5	C1959	*F11	C2150	*H10	C2341	*D5	C2532	*B6	C2723	*B11	C2914	*D10	C3106	*L7	C3202	*M5	C3298	*M8	C4054	*H9	C4532	*D9	CL703	*M6	CL2226	G11
C205	*R1	C413	*M13	C827	*K9	C1427	*P3	C1578	*H5	C1769	*F5	C1960	*F11	C2151	*H10	C2342	*D5	C2533	*B5	C2724	*B10	C2915	*D11	C3107	*L8	C3203	*M5	C3299	*N8	C4055	*H7	C4533	*D7	CL704	*M8	CL2227	G11
C206	*P1	C414	P12	C828	*K9	C1428	*P2	C1579	*H5	C1770	*F5	C1961	*F11	C2152	*H10	C2343	*D5	C2534	*B5	C2725	*B11	C2916	*D11	C3108	*N8	C3204	*M5	C3300	*M8	C4056	*H9	C4534	*C9	CL705	*H8	CL2228	G11
C207	P1	C415	*M11	C829	*K9	C1429	*R3	C1580	*H5	C1771	*F5	C1962	*F11	C2153	*H11	C2344	*D6	C2535	*B5	C2726	*B11	C2917	*D10	C3109	*N8	C3205	*M5	C3301	*M8	C4057	*H7	C4535	*C8	CL706	*D8	CL2229	G10
C208	E1	C416	*M12	C830	*K9	C1430	*R3	C1581	*H5	C1772	*F5	C1963	*F11	C2154	*H11	C2345	*D5	C2536	*B5	C2727	*B11	C2918	*D10	C3110	*M8	C3206	*M5	C3302	*M7	C4058	*H9	C4536	*C8	CL801	*J9	CL2230	G11
C209	E1	C417	*M12	C831	*K8	C1431	*R3	C1582	*H5	C1773	*F5	C1964	*F11	C2155	*H11	C2346	*D5	C2537	*B5	C2728	*B11	C2919	*D11	C3111	*N5	C3207	*M5	C3303	*N7	C4059	*G7	C4537	*C8	CL802	*J9	CL2231	G10
C210	E1	C418	*M11	C832	*K9	C1432	*R3	C1583	H4	C1774	*F5	C1965	*F11	C2156	*G10	C2347	*D5	C2538	*B5	C2729	*B11	C2920	*D11	C3112	*N5	C3208	*M5	C3304	*M7	C4060	*G7	C4538	*C8	CL803	*J9	CL2232	G11
C211	E1	C419	*M12	C833	*K8	C1433	*R3	C1584	H4	C1775	*F5	C1966	*F11	C2157	*G10	C2348	*D5	C2539	*B5	C2730	*B11	C2921	*D11	C3113	*N5	C3209	*M5	C3305	*M7	C4061	*G7	C4539	*D8	CL901	P12	CL2233	G11
C212	K1	C420	*M12	C901	R11	C1434	*R3	C1585	H3	C1776	*F5	C1967	*F11	C2158	*G10	C2349	*E5	C2540	*B5	C2731	*C10	C2922	*D11	C3114	*N5	C3210	*M5	C3306	*M7	C4062	*G9	C4540	*D8	CL902	*J11	CL2234	G11
C213	K1	C501	R8	C902	R11	C1435	*R3	C1586	H4	C1777	*F5	C1968	*F11	C2159	*H11	C2350	*E5	C2541	*B5	C2732	*C10	C2923	*D11	C3115	*N5	C3211	*M6	C3307	*N7	C4063	*G9	C4541	*D8	CL903	*J11	CL2235	G11
C214	K1	C502	*R8	C903	R11	C1436	*R2	C1587	*H4	C1778	*F5	C1969	*G11	C2160	*H11	C2351	*E5	C2542	*B5	C2733	*C10	C2924	*D10	C3116	*N5	C3212	*M8	C3308	*N7	C4064	*G9	C4542	*C8	CL1500	G5	CL2236	G11
C215	K1	C503	*P8	C904	R11	C1437	*R2	C1588	*H4	C1779	*F5	C1970	*G11	C2161	*H11	C2352	*E5	C2543	*B5	C2734	*C11	C2925	*D11	C3117	*N5	C3213	*M8	C3309	*N7	C4065	*G8	C4543	*C8	CL1501	G5	CL2237	G11
C216	C1	C504	*P8	C905	R11	C1438	*R2	C1589	*H3	C1780	*F5	C1971	*F11	C2162	*H11	C2353	*E5	C2544	*B6	C2735	*C10	C2926	*D11	C3118	*N5	C3214	*M8	C3310	*N7	C4066	*G8	C4544	*D8	CL1502	G5	CL2238	H10
C217	C1	C505	*R8	C906	*R11	C1439	*R2	C1590	*H4	C1781	*F5	C1972	*F11	C2163	*H11	C2354	*E5	C2545	*B5	C2736	*C11	C2927	*D11	C3119	*N5	C3215	*M8	C3311	*N8	C4067	*G8	C4545	*D8	CL1503	G5	CL2239	H10
C218	C1	C506	*R8	C907	R11	C1440	*R2	C1591	H4	C1782	*F5	C1973	*G11	C2164	*H11	C2355	*E5	C2546	*B5	C2737	*C11	C2928	*D11	C3120	*N5	C3216	*M8	C3312	*N7	C4068	*G8	C4546	*C8	CL1621	H6	CL2240	H10
C219	C1	C507	*P8	C908	*R11	C1441	*R2	C1592	H4	C1783	G4	C1974	*F11	C2165	*H11	C2356	*E5	C2547	*B5	C2738	*C10	C2929	*D11	C3121	*N5	C3217	*M8	C3313	*L5	C4069	*G8	C4547	*D8	CL1622	H6	CL2241	H10
C220	H1	C508	*R8	C909	P11	C1442	*R2	C1593	H4	C1784	G4	C1975	*F11	C2166	*H11	C2357	*E6	C2548	*C5	C2739	*C11	C2930	*D11	C3122	*N5	C3218	*M8	C3314	*L5	C4070	*G8	C4548	*D8	CL1623	*H6	CL2242	H10
C221	H1	C509	*R9	C910	P11	C1443	*R2	C1594	H4	C1785	F3	C1976	*F11	C2167	*G11	C2358	*E5	C2549	*C5	C2740	*C11	C2931	*E10	C3123	*N5	C3219	*M8	C3315	*L5	C4071	*F7	C4549	*D8	CL1624	J5	CL2243	H10
C222	H1	C510	*P8	C911	P11	C1444	*R2	C1595	*H4	C1786	G4	C1977	*F11	C2168	*G11	C2359	*E5	C2550	*C5	C2741	*C11	C2932	*E10	C3124	*N5	C3220	*M8	C3316	*L5	C4072	*F7	C4550	*C8	CL1626	J5	CL2300	D5
C223	G1	C511	P8	C912	P11	C1500	*H5	C1596	*H4	C1787	*F4	C1978	*F11	C2169	*H11	C2360	*D5	C2551	*C5	C2742	*C11	C2933	*E10	C3125	*N5	C3221	*M8	C3317	*L5	C4073	*F8	C4551	*C8	CL1627	J5	CL2301	D5
C224	E1	C512	P8	C913	P11	C1501	*H5	C1597	*H4	C1788	*F4	C1979	*F11	C2170	*H11	C2361	*D5	C2552	*C5	C2743	*C11	C2934	*E11	C3126	*N5	C3222	*M8	C3318	*M6	C4074	*F8	C4552	*C8	CL1628	J5	CL2302	D5
C225	E1	C513	P8	C914	*P11	C1502	*H5	C1598	*H4	C1789	*F3	C1980	*F11	C2171	*H11	C2362	*D5	C2553	*C5	C2744	*C10	C2935	*E10	C3127	*M5	C3223	*M6	C3319	*L5	C4075	*G8	C4553	*D7	CL1629	J5	CL2303	D5
C226	*E3	C514	P9	C915	P11	C1503	*H5	C1599	H4	C1790	*F4	C1981	*F11	C2172	*H11	C2363	*E5	C2554	*C5	C2745	*C10	C2936	*E11	C3128	*M5	C3224	*M6	C3320	*M6	C4076	*G8	C4554	*D9	CL1630	J5	CL2421	D6
C227	K1	C515	P9	C916	*P11	C1504	*H5	C1600	*H4	C1791	G4	C1982	*F11	C2173	*H11	C2364	*E5	C2555	*C5	C2746	*C10	C2937	*E11	C3129	*M5	C3225	*M6	C3321	*M6	C4077	*G8	C4555	*D7	CL1631	J5	CL2422	E6
C228	K1	C516	P8	C917	*P12	C1505	*H5	C1621	*H6	C1792	G4	C1983	F12	C2174	*H11	C2365	*E5	C2556	*C5	C2747	*C10	C2938	*E10	C3130	*M4	C3226	*M6	C3322	*L7	C4078	*G8	C4556	*D9	CL1632	J5	CL2423	*D6
C229	*K3	C517	P8	C918	*P12	C1506	*H5	C1622	*H6	C1793	F4	C1984	F12	C2175	*H11	C2366	*E5	C2557	*C6	C2748	*B10	C2939	*E11	C3131	*M5	C3227	*M6	C3323	*L7	C4079	*G8	C4557	*D7	CL1633	J5	CL2424	E5
C230	C1	C518	P8	C919	J11	C1507	*H5	C1623	*J5	C1794	F4	C1985	F12	C2176	*H11	C2367	*E5	C2558	*C5	C2749	*B10	C2940	*E11	C3132	*M4	C3228	*M5	C3324	*L7	C4080	*G8	C4558	*D9	CL1634	J5	CL2426	E5
C231	B1	C519	P8	C920	J11	C1508	*H6	C1624	*J5	C1795	*F4	C1986	F12	C2177	*H11	C2368	*E5	C2559	*C5	C2750	*B10	C2941	*E11	C3133	*M5	C3229	*L5	C3325	*L7	C4081	*H7	C4559	*D7	CL1635	J5	CL2427	E5
C232	*C3	C520	P8	C1001	R11	C1509	*H5	C1700	*F5	C1796	*F4	C1987	*G11	C2178	*H11	C2369	*D5	C2560	*B5	C2751	*B10	C2942	*E11	C3134	*M5	C3230	*M5	C3326	*M8	C4082	*H7	C4560	*D7	CL1636	J5	CL2428	E5
C233	G1	C521	P8	C1002	R11	C1510	*H5	C1701	*F5	C1797	*F4	C1988	*G12	C2179	*H11	C2370	*D5	C2561	*B5	C2752	*B10	C2943	*E11	C3135	*M5	C3231	*L5	C3327	*L7	C4083	*H9	C4561	*D7	CL1637	J5	CL2429	E5
C234	G1	C522	P8	C1003	R11	C1511	*H5	C1702	*F5	C1798	*F4	C1989	*F12	C2180	*H11	C2371	*D5	C2562	*C5	C2753	*B11	C2944	*E10	C3136	*M5	C3232	*M5	C3328	*M8	C4084	*H9	C4562	*C9	CL1638	H6	CL2430	E5
C235	*H3	C523	*P9	C1004	R11	C1512	*H5	C1703	*F5	C1799	F4	C1990	*G12	C2181	*H11	C2372	*D5	C2563	*C5	C2754	*B11	C2945	*D10	C3137	*M5	C3233	*M5	C3329	*L7	C4085	*H8	C4563	*C9	CL1639	H6	CL2431	E5
C236	D2	C524	*P8	C1005	P13	C1513	*H5	C1704	*F5	C1800	*F4	C1991	F12	C2182	*H11	C2373	*D5	C2564	*C5	C2755	*B11	C2946	*D10	C3138	*M5	C3234	*M8	C3330	*M8	C4086	*H8	C4564	*C9	CL1640	H6	CL2432	E5
C237	*D2	C525	*P8	C1006	R11	C1514	*H5	C1705	*F5	C1821	*G6	C1992	F12	C2183	H12	C2374	*D5	C2565	*C5	C2756	*B10	C2947	*D10	C3139	*M8	C3235	*M8	C3331	*L5	C4087	*G7	C4565	*D8	CL1641	H6	CL2433	E5
C238	J2	C601	R12	C1007	*R11	C1515	*H5	C1706	*F5	C1822	*F6	C1993	F12	C2184	H12	C2375	*D5	C2566	*C5	C2757	*B10	C2948	*D10	C3140	*M8	C3236	*M8	C3332	*L5	C4088	*G7	C4566	*D8	CL1642	H6	CL2434	E5
C239	*J2	C602	P12	C1008	R11	C1516	*H5	C1707	*F5	C1823	*G5	C1994	F12	C2185	H12	C2376	*D5	C2567	*C5	C2758	*B11	C2949	*D10	C3141	*M8	C3237	*M8	C3333	*M6	C4089	*G9	C4567	*D8	CL1643	H6	CL2435	E5
C240	B2	C603	P12	C1009	*R11	C1517	*H5	C1708	*F6	C1824	*G5	C1995	*G12	C2186	H12	C2377	*D5	C2568	*C5	C2759	*B11	C2950	*D10	C3142	*M7	C3238	*M8	C3334	*L7	C4090	*G9	C4568	*D8	CL1700	E5	CL2436	E5
C241	*B2	C604	R9	C1010	P13	C1518	*H5	C1709	*F5	C1900	*G11	C1996	*G12	C2187	*H11	C2378	*D5	C2569	*B5	C2760	*C11	C2951	*D10	C3143	*M7	C3239	*M8	C3335	*L7	C4091	*F8	C4569	*C8	CL1701	E5	CL2437	E5
C242	G2	C605	*R9	C1011	*P11	C1519	*H5	C1710	*F5	C1901	*G10	C1997	*F12	C2188	*H12	C2379	*E5	C2570	*B5	C2761	*C11	C2952	*D10	C3144	*M7	C3240	*L8	C3336	*M8	C4092	*F8	C4570	*C8	CL1702	E5	CL2438	D6
C243	*G2	C606	*R9	C1012	*P11	C1520	*H5	C1711	*F5	C1902	*F11	C1998	*F12	C2189	*H12	C2380	*E5	C2571	*B5	C2762	*C11	C2953	*D11	C3145	*M7	C3241	*M8	C3501	L5	C4093	*G7	C4571	*C7	CL1703	E5	CL2439	D6
C301	R6	C607	*R10	C1013	*P11	C1521	*H5	C1712	*F5	C1903	*F10	C1999	F12	C2190	*H12	C2381	*D5	C2572	*B5	C2763	*B11	C2954	*D11	C3146	*M8	C3242	*L8	C3502	L8	C4094	*G7	C4572	*C7	CL1821	F6	CL2440	D6
C302	M3	C608	*R10	C1014	*P11	C1522	*H5	C1713	*F5	C1904	*F11	C2000	*F12	C2191	H12	C2382	*D5	C2573	*B5	C2764	*B11	C2955	*D11	C3147	*M8	C3243	*M7	C3503	L6	C4095	*H8	C4573	*C8	CL1822	F6	CL2441	D6
C303	N9	C609	*R10	C1015	*P11	C1523	*H5	C1714	*F5	C1905	*G11	C2021	*F10	C2192	H12	C2383	E4	C2574	*B5	C2765	*B11	C2956	*D10	C3148	*M8	C3244	*M7	C3504	L8	C4096	*H8	C4574	*C8	CL1823	*F6	CL2442	D6
C304	R6	C610	*P9	C1016	*P11	C1524	*H5	C1715	*F5	C1906	*F11	C2022	*F10	C2193	H12	C2384	E4	C2575	*B5	C2766	*B11	C2957	*D10	C3149	*M7	C3245	*M4	C4001	*H7	C4097	*H8	C4575	*C8	CL1824	G5	CL2443	D6
C305	*R6	C611	P9	C1017	*P11	C1525	*H5	C1716	*F5	C1907	*F11	C2023	*E11	C2194	H12	C2385	E3	C2576	*B5	C2767	*B11	C2958	*D10	C3150	*M7	C3246	*M4	C4002	*H9	C4098	*H8	C4576	*C8	CL1826	G5	CL2500	B5
C306	P6	C612	P9	C1018	*P11	C1526	*H5	C1717	*F5	C1908	*F10	C2024	*E11	C2195	*H12	C2386	E4	C2577	*B5	C2768	*B11	C2959	*D11	C3151	*N5	C3247	*M4	C4003	*G8	C4099	*G8	C4577	*C8	CL1827	G5	CL2501	B5
C307	P6	C613	P9	C1019	*P13	C1527	*H5	C1718	*F5	C1909	*F10	C2100	*H11	C2196	*H12	C2387	*D4	C2578	*B5	C2769	*C11	C2960	*D11	C3152	*N5	C3248	*M4	C4004	*G8	C4100	*G8	C4578	*C8	CL1828	G5	CL2502	B5
C308	M3	C614	*P9	C1101	M4	C1528	*H5	C1719	*F5	C1910	*F11	C2101	*H10	C2197	*H12	C2388	*D4	C2579	*C5	C2770	*C11	C2961	*D11	C3153	*N5	C3249	*M4	C4005	*G8	C4101	*G8	C4579	*D8	CL1829	G5	CL2503	B5
C309	M3	C615	*P9	C1102	M7	C1529	*H5	C1720	*F5	C1911	*F11	C2102	*H11	C2198	*H12	C2389	*D3	C2580	*C5	C2771	*C11	C2962	*D11	C3154	*N5	C3250	*M4	C4006	*G8	C4102	*G8	C4580	*D8	CL1830	G5	CL2621	C6
C310	N9	C616	P10	C1103	*H8	C1530	*H5	C1721	*F5	C1912	*F10	C2103	*H10	C2199	H12	C2390	*D4	C2581	*C5	C2772	*C11	C2963	*D11	C3155	*M5	C3251	*M5	C4007	*G8	C4103	*G8	C4581	*D7	CL1831	G5	CL2622	C6
C311	N9	C617	P10	C1104	*D8	C1531	*H6	C1722	*F5	C1913	*F10	C2104	*H11	C2200	*H12	C2391	E4	C2582	*C5	C2773	*C11	C2964	*D11	C3156	*M5	C3252	*M5	C4008	*G8	C4104	*G8	C4582	*D7	CL1832	G5	CL2623	*B6
C312	*G3	C618	P9	C1201	A6	C1532	*G6	C1723	*G5	C1914	*F10	C2105	*H11	C2221	*H10	C2392	E4	C2583	C4	C2774	*C11	C2965	*D11	C3157	*M5	C3253	*M5	C4009	*G8	C4105	*G8	C4583	*D9	CL1833	G5	CL2624	C5
C313	*G3	C619	P9	C1202	A6	C1533	*G5	C1724	*G5	C1915	*F11	C2106	*H11	C2222	*H10	C2393	D4	C2584	C4	C2775	*C11	C2966	*D11	C3158	*M5	C3254	*M7	C4010	*G8	C4106	*G8	C4584	*D9	CL1834	G5	CL2626	C5
C314	G4	C620	P9	C1203	A6	C1534	*G5	C1725	*F5	C1916	*F11	C2107	*H11	C2223	*G11	C2394	D4	C2585	C3	C2776	*C11	C2967	*D11	C3159	*M5	C3255	*M7	C4011	*G8	C4107	*G8	C4585	*D8	CL1835	G5	CL2627	C5
C315	G3	C621	P9	C1204	A6	C1535	*H5	C1726	*F5	C1917	*F10	C2108	*H10	C2224	*G11	C2395	*D4	C2586	C4	C2777	*C11	C2968	*D11	C3160	*M5	C3256	*M7	C4012	*G8	C4108	*G8	C4586	*D8	CL1836	G5	CL2628	C5
C316	*D3	C622	*P10	C1301	N6	C1536	*H5	C1727	*F5	C1918	*F10	C2109	*H10	C2300	*D5	C2396	*D4	C2587	*B4	C2778	*C11	C2969	*E11	C3161	*M5	C3257	*M7	C4013	*G8	C4109	*H8	C4587	*C7	CL1837	G5	CL2629	C5
C317	C4	C623	P10	C1302	N6	C1537	*H5	C1728	*F5	C1919	*F11	C2110	*H11	C2301	*D5	C2397	*E4	C2588	*B4	C2779	*B11	C2970	*E11	C3162	*M5	C3258	*M7	C4014	*G8	C4110	*H8	C4588	*D7	CL1838	F6	CL2630	C5
C318	*D3	C624	P9	C1303	N5	C1538	*H5	C1729	*F5	C1920	*F11	C2111	*H11	C2302	*D5	C2398	*E4	C2589	*B3	C2780	*B11	C2971	*E11	C3163	*M5	C3259	*M7	C4015	*G8	C4111	*H8	C4589	*C9	CL1839	F6	CL2631	C5
C319	C3	C625	P9	C1304	N5	C1539	*H5	C1730	*F5	C1921	*F11	C2112	*H10	C2303	*D5	C2399	D4	C2590	*B4	C2781	*B11	C2972	*E11	C3164	*M5	C3260	*M7	C4016	*G8	C4112	*H8	C4590	*C9	CL1840	F6	CL2632	C5
C320	R6	C626	*P10	C1305	N5	C1540	*H5	C1731	*F6	C1922	*F11	C2113	*H10	C2304	*D5	C2400	*E4	C2591	C4	C2782	*B11	C2973	*E11	C3165	*M5	C3261	*M8	C4017	*G8	C4113	*F7	C4591	*C8	CL1841	F6	CL2633	C5
C321	P6	C627	*P10	C1306	N5	C1541	*H5	C1732	*F6	C1923	*F11	C2114	*H10	C2305	*D5	C2421	*E6	C2592	C4	C2783	B12	C2974	*E11	C3166	*M5	C3262	*M8	C4018	*G8	C4114	*H8	C4592	*C8	CL1842	F6	CL2634	C5
C322	N3	C628	*P10	C1307	N5	C1542	*H5	C1733	*F5	C1924	*F10	C2115	*H11	C2306	*D5	C2422	*D6	C2593	B4	C2784	B12	C2975	*E11	C3167	*M5	C3263	*N8	C4019	*G8	C4115	*F7	C4593	*C7	CL1843	F6	CL2635	C5
C323	N3	C701	R12	C1308	N5	C1543	*H5	C1734	*F5	C1925	*F11	C2116	*H11	C2307	*D5	C2423	*E5	C2594	B4	C2785	B12	C2976	*E11	C3168	*M7	C3264	*N8	C4020	*G8	C4116	*F9	C4594	*C7	CL1900	G11	CL2636	C5
C324	N3	C702	G7	C1309	N5	C1544	*H6	C1735	*F5	C1926	*F11	C2117	*H10	C2308	*D6	C2424	*E5	C2595	*B4	C2786	B12	C2977	*E11	C3169	*M8	C3265	*N8	C4021	*G8	C4117	F7	C4595	*D8	CL1901	G11	CL2637	C5
C325	N3	C703	G9	C1310	N5	C1545	*H5	C1736	*F5	C1927	*F11	C2118	*H10	C2309	*D5	C2500	*B5	C2596	*B4	C2787	*C11	C2978	*E11	C3170	*M8	C3266	*N7	C4022	*G8	C4118	F7	C4596	*D8	CL1902	G11	CL2638	C6
C326	M9	C704	C7	C1311	N5	C1546	*H5	C1737	*F5	C1928	*F11	C2119	*H11	C2310	*D5	C2501	*B5	C2597	*C4	C2788	*C12	C2979	*D11	C3171	*M8	C3267	*N7	C4023	*G7	C4501	*D7	C4597	*D8	CL1903	G11	CL2639	C6
C327	*N9	C705	C9	C1312	N5	C1547	*H5	C1738	*F5	C1929	*F11	C2120	*H11	C2311	*D5	C2502	*B5	C2598	*C4	C2789	*C12	C2980	*D11	C3172	*M8	C3268	*N8	C4024	*G7	C4502	*D9	C4598	*D8	CL2021	F10	CL2640	C6
C328	*M9	C706	E9	C1313	N5	C1548	*H5	C1739	*F5	C1930	*F11	C2121	*H11	C2312	*D5	C2503	*B5	C2599	B4	C2790	*C12	C2981	*D11	C3173	*M8	C3269	*N7	C4025	*G8	C4503	*C8	C4599	*D8	CL2022	F10	CL2641	C6
C329	*M9	C707	E9	C1314	N4	C1549	*H5	C1740	*F5	C1931	*G10	C2122	*H11	C2313	*D5	C2504	*B5	C2600	*C4	C2791	B12	C2982	*D11	C3174	*M8	C3270	*N8	C4026	*G8	C4504	*D8	C4600	*D8	CL2023	*F10	CL2642	C6
C330	G4	C708	E9	C1315	N4	C1550	*H5	C1741	*F5	C1932	*G10	C2123	*H11	C2314	*D5	C2505	*B5	C2621	*C6	C2792	B12	C2983	D12	C3175	*M7	C3271	*N8	C4027	*G8	C4505	*C8	C4601	*C8	CL2024	E10	CL2643	C6
C331	D4	C709	E9	C1316	N4	C1551	*H5	C1742	*F5	C1933	*G10	C2124	*H10	C2315	*D5	C2506	*B5	C2622	*B6	C2793	C12	C2984	D12	C3176	*M7	C3272	*N8	C4028	*G8	C4506	*C8	C4602	*C8	CL2026	F11	CL2700	C11
C332	M3	C801	*K8	C1401	*P3	C1552	*H5	C1743	*F5	C1934	*G11	C2125	*H11	C2316	*D5	C2507	*B5	C2623	*C5	C2794	C12	C2985	D12	C3177	*M7	C3273	*N8	C4029	*H8	C4507	*C8	C4603	*C8	CL2027	E11	CL2701	C11
C333	*M9	C802	*K8	C1402	*P3	C1553	*H5	C1744	*F6	C1935	*F10	C2126	*H11	C2317	*E5	C2508	*B6	C2624	*C5	C2795	*C12	C2986	D12	C3178	*M7	C3274	*N8	C4030	*F8	C4508	*C8	C4604	*C8	CL2028	E11	CL2702	C11
C334	*G12	C803	A11	C1403	*P3	C1554	*H5	C1745	*F5	C1936	*F11	C2127	*H11	C2318	*D5	C2509	*B5	C2700	*C11	C2796	*C12	C2987	*E11	C3179	*M7	C3275	*M5	C4031	*H7	C4509	*C8	C4605	*C8	CL2029	E10	CL2703	C11
C335	*G12	C804	*J8	C1404	*P3	C1555	*H5	C1746	*F5	C1937	*F11	C2128	*H11	C2319	*E5	C2510	*C5	C2701	*C10	C2797	*B12	C2988	*E12	C3180	*M8	C3276	*M5	C4032	*H9	C4510	*C8	C4606	*C8	CL2030	F11	CL2821	B10
C336	G12	C805	*K8	C1405	*P3	C1556	*H5	C1747	*F5	C1938	*F10	C2129	*H11	C2320	*E5	C2511	*C5	C2702	*C11	C2798	*B12	C2989	*E12	C3181	*N5	C3277	*M5	C4033	*G7	C4511	*C8	C4607	*C8	CL2031	F10	CL2822	B10
C337	G12	C806	*K8	C1406	*P3	C1557	*H6	C1748	*F5	C1939	*G11	C2130	*H11	C2321	*E5	C2512	*C5	C2703	*C10	C2799	C12	C2990	*E12	C3182	*N5	C3278	*N4	C4034	*G9	C4512	*C8	C4608	*C8	CL2032	E11	CL2823	*C10
C338	*C12	C807	*K8	C1407	*P3	C1558	*H5	C1749	*F5	C1940	*G11	C2131	*H10	C2322	*E5	C2513	*C5	C2704	*C11	C2800	*B12	C2991	D12	C3183	*N5	C3279	*N6	C4035	*G8	C4513	*C8	C4609	*D8	CL2033	E11	CL2824	B10
C339	D12	C808	*K8	C1408	*P2	C1559	*H5	C1750	*F5	C1941	*F11	C2132	*H10	C2323	*E5	C2514	*C5	C2705	*C11	C2821	*B10	C2992	D12	C3184	*N5	C3280	*M8	C4036	*G8	C4514	*C8	C4610	*D8	CL2034	F11	CL2826	B11
C340	*C12	C809	*K8	C1409	*P2	C1560	*H5	C1751	*F5	C1942	*F11	C2133	*H10	C2324	*E5	C2515	*C5	C2706	*C11	C2822	*C10	C2993	E12	C3185	*M5	C3281	*M8	C4037	*G8	C4515	*C8	C4611	*D8	CL2035	F11	CL2827	B11
C341	D12	C810	*K8	C1410	*P2	C1561	*H5	C1752	*G5	C1943	*F11	C2134	*H11	C2325	*D5	C2516	*C5	C2707	*C11	C2823	*B11	C2994	E12	C3186	*M5	C3282	*M8	C4038	*G8	C4516	*C8	C4612	*D8	CL2036	E11	CL2828	B11
C342	G12	C811	*K8	C1411	*P2	C1562	*H5	C1753	*G5	C1944	*F10	C2135	*H10	C2326	*D5	C2517	*C5	C2708	*C10	C2824	*B11	C2995	*E12	C3187	*N5	C

CL2841	C10	E8	D13	IC1501	H4	R207	*P1	R517	P9	R766	M7	R879	K9	R1001	J11	R1406	P3	R1630	*H6	R1846	*G5	R2062	*G11	R2311	D4	R2527	B4	R2830	*B10	R3046	*D11	RB1015	*P11	RB2223	J10	RB2915	E12
CL2842	B10	E9	L3	IC1502	*H4	R208	*E2	R518	*P8	R767	G7	R880	*J9	R1002	J11	R1407	P3	R1631	*J5	R1847	*G5	R2063	G11	R2312	E4	R2528	*B4	R2831	*B11	R3047	*D11	RB1016	*P11	RB2224	H10	RB2916	*D12
CL2843	B10	E10	J10	IC1701	F4	R209	*K2	R601	R12	R768	G9	R881	J9	R1003	J11	R1408	P3	R1632	H6	R1848	*G5	R2064	*G11	R2313	D4	R2529	*B4	R2832	C10	R3048	*D11	RB1500	H4	RB2225	H10	RB3021	E10
CL2900	E11	E11	*P12	IC1702	*F4	R210	*C2	R602	R12	R769	C7	R882	J9	R1004	J11	R1409	P2	R1633	H6	R1849	G6	R2065	*E11	R2314	*E4	R2530	*C4	R2833	C10	R3049	D10	RB1501	H4	RB2226	J11	RB3022	E10
CL2901	E11	E12	*P7	IC1901	F12	R211	*G2	R603	*R12	R770	C9	R883	*J9	R1005	J11	R1410	P2	R1634	H6	R1850	G6	R2066	F8	R2315	*E4	R2531	*C4	R2834	C10	R3050	D10	RB1502	H4	RB2227	J11	RB3023	E10
CL2902	E11	E13	*N1	IC1902	*F12	R212	*E2	R604	*R12	R771	E9	R884	J8	R1006	*P11	R1411	P2	R1635	*H6	R1851	G6	R2100	H11	R2316	*D4	R2532	*C4	R2835	*C10	R3051	D10	RB1503	H4	RB2228	J11	RB3024	E10
CL2903	E11	E14	*G13	IC2101	H12	R213	*E2	R605	*R9	R772	*L9	R885	J9	R1007	*P12	R1412	P2	R1636	G6	R1852	*G6	R2101	H11	R2317	*E4	R2533	*C4	R2836	C10	R3052	*D10	RB1504	*H5	RB2300	E4	RB3025	E10
CL3021	D10	E15	*N2	IC2102	*H12	R214	*E2	R606	*R9	R773	*L9	R886	*J9	R1008	*P12	R1413	P2	R1637	G6	R1853	G5	R2102	H11	R2318	E4	R2621	*C7	R2837	C10	R3053	D10	RB1505	*H5	RB2301	E4	RB3026	E11
CL3022	D10	E16	*G3	IC2301	D4	R215	*K2	R607	P12	R774	*F8	R887	*J9	R1009	*P12	R1414	P2	R1638	H6	R1854	G6	R2103	*H11	R2319	E4	R2622	C7	R2838	C10	R3054	D10	RB1506	*H5	RB2302	E4	RB3027	E11
CL3023	*E10	E17	*C3	IC2302	*D4	R216	*K2	R608	*R9	R775	E9	R888	K8	R1051	P11	R1415	P3	R1639	G5	R1855	G6	R2104	*H11	R2320	*D4	R2623	C7	R2839	C10	R3055	D10	RB1507	*H5	RB2303	D4	RB3028	E11
CL3024	D10	E18	*D13	IC2501	C4	R217	*K2	R609	*R10	R776	H8	R889	*K9	R1052	P11	R1416	P3	R1640	H6	R1856	G5	R2105	H11	R2321	*D4	R2624	*C7	R2840	B10	R3056	D11	RB1508	*G5	RB2304	*D5	RB3501	*M6
CL3026	D11	E19	*K5	IC2502	*B4	R218	*K2	R610	*R10	R777	*F8	R890	*J8	R1053	P11	R1417	P3	R1641	H6	R1857	G5	R2106	H11	R2322	E4	R2625	C7	R2841	B10	R3057	D11	RB1509	G5	RB2305	*D5	RB3502	*M8
CL3027	D11	E20	*J10	IC2701	C12	R219	*C2	R611	P12	R778	H8	R891	J8	R1054	P11	R1418	P3	R1642	*G7	R1858	*G5	R2107	H11	R2323	E4	R2626	C7	R2842	*C9	R3058	*D11	RB1510	G5	RB2306	*E5		
CL3028	D11	E21	A5	IC2702	*C12	R220	*C2	R612	*P12	R779	*C8	R892	K9	R1055	P11	R1419	P3	R1643	*G7	R1859	F5	R2108	H11	R2324	D4	R2627	*C6	R2843	*C9	R3059	E11	RB1511	H4	RB2307	*E5	TP201	A3
CL3029	D10			IC2901	D12	R221	*C2	R613	*P12	R780	E9	R893	K8	R1056	P11	R1420	P3	R1644	G7	R1860	*F5	R2109	H11	R2325	D4	R2628	C6	R2844	C8	R3060	*E11	RB1512	H4	RB2308	*D5	TP202	A5
CL3030	D11	F201	R1	IC2902	*D12	R222	*G2	R614	*P12	R781	D8	R894	*K8	R1057	P11	R1421	P2	R1645	*J5	R1861	*F5	R2110	H12	R2326	D4	R2629	*C5	R2845	*B11	R3061	*E11	RB1513	H4	RB2309	D5	TP203	A4
CL3031	D10	F202	E1	IC3501	L5	R223	*G2	R615	*P12	R782	*C8	R895	*J9	R1058	P11	R1422	P2	R1646	*J5	R1862	*F5	R2111	H12	R2327	D4	R2630	*C6	R2846	*B11	R3062	*E11	RB1514	*H4	RB2310	D5	TP204	A4
CL3032	D11	F203	J1	IC3502	L8	R224	*G2	R616	*P12	R783	D8	R896	J9	R1059	P11	R1423	P2	R1647	*J5	R1863	F5	R2112	H12	R2328	*D4	R2631	*C5	R2847	*B11	R3063	E11	RB1515	H4	RB2311	D4	TP205	A3
CL3033	D11	F204	B1	IC4001	F7	R225	A5	R617	*R9	R801	*K8	R897	J9	R1060	P11	R1424	P2	R1648	*J5	R1864	*F5	R2113	H12	R2329	*D4	R2632	B6	R2848	*B11	R3064	*E11	RB1516	*H4	RB2312	D4	TP301	P6
CL3034	D11	F205	G1	IC4501	B7	R226	A4	R618	*R10	R802	*K8	R898	*J9	R1061	P11	R1425	P2	R1649	H6	R1865	*G5	R2114	*H12	R2330	*E4	R2633	B6	R2849	B10	R3065	*D11	RB1621	G5	RB2313	E4	TP302	N3
CL3035	D11					R227	A4	R619	*R10	R803	*K8	R899	J9	R1062	P11	R1426	P2	R1650	H6	R1866	G7	R2115	*H12	R2331	*E4	R2634	B6	R2850	B10	R3066	*C9	RB1622	G6	RB2314	*D4	TP303	M9		
CL3036	D11	FB701	E9	L201	P1	R228	A3	R620	*R10	R804	K9	R900	J9	R1063	P11	R1427	*R3	R1651	J6	R1900	F11	R2116	*H12	R2332	*E4	R2635	*B6	R2851	B10	R3101	*M5	RB1623	G6	RB2315	D4	TP601	P12
CL3037	D11	FB3101	*N8	L501	R8	R229	*E2	R621	*R10	R805	*K8	R901	A11	R1064	P11	R1428	*R3	R1652	*J6	R1901	F11	R2117	*H12	R2333	*E4	R2636	B6	R2852	*B10	R3102	*M5	RB1624	G6	RB2316	*E4	TP701	P12
CL3038	D10	FB3102	*N5	L601	R9	R301	M3	R622	*R10	R806	*K8	R902	A11	R1065	P11	R1429	*R3	R1653	J5	R1902	F11	R2118	H12	R2421	D7	R2637	B6	R2853	B10	R3103	*M5	RB1625	H6	RB2421	D5	TP702	R12
CL3039	D10	FB3103	*R6	L1500	*H5	R302	M3	R623	*P9	R807	*K8	R903	J8	R1066	P11	R1430	*R3	R1654	J6	R1903	*F11	R2119	H12	R2422	D7	R2638	B6	R2854	B10	R3104	*M5	RB1626	G5	RB2422	D6	TP703	R12
CL3040	D10	FB3104	*M3	L1501	*H5	R303	M3	R624	R10	R808	K8	R904	J8	R1067	*P13	R1431	*R3	R1655	J6	R1904	*G11	R2120	*H12	R2423	D7	R2639	B5	R2855	B10	R3113	*M7	RB1627	G5	RB2423	D6	TP704	R12
CL3041	D10	FB3105	*N10	L1700	*F5	R304	N9	R625	P9	R809	K8	R906	*J8	R1068	*P13	R1432	*R3	R1656	J5	R1905	G11	R2121	*H12	R2424	D7	R2640	C6	R2856	B11	R3114	*M8	RB1628	G5	RB2424	D6	TP705	M3
CL3042	D10			L1701	*F5	R305	N9	R626	P9	R810	J8	R907	*K8	R1101	*M5	R1433	*R3	R1657	J5	R1906	F11	R2122	H12	R2425	D7	R2641	C6	R2857	B11	R3115	*M8	RB1700	G4	RB2425	D6	TP706	L3
CL3043	D10	IC1	K9	L1900	*F11	R306	N9	R627	P9	R811	J8	R908	*K8	R1102	M4	R1434	*R2	R1658	*J5	R1907	F11	R2123	H12	R2426	D7	R2642	*C7	R2858	*B11	R3116	*M8	RB1701	G4	RB2426	D5	TP707	M3
CL3501	*M6	IC2	M5	L1901	*F11	R307	P6	R628	P10	R812	*J8	R909	*K8	R1103	*M7	R1435	*R2	R1659	G5	R1908	F11	R2124	H12	R2427	*E6	R2643	*C7	R2859	C11	R3501	M6	RB1702	F4	RB2427	D5	TP708	L3
CL3502	*M6	IC3	M8	L2100	*H11	R308	N3	R629	*P10	R813	*J8	R910	J8	R1104	M7	R1436	*R2	R1660	*G5	R1909	F11	R2125	H12	R2428	E6	R2644	C7	R2860	*C11	R3502	M6	RB1703	F4	RB2428	D5	TP709	P8
CL3503	*M6	IC4	G8	L2101	*H11	R309	M9	R701	M6	R814	J8	R911	K8	R1105	*H8	R1437	*R2	R1661	*G5	R1910	F12	R2126	H12	R2429	*E5	R2645	*C5	R2861	*C11	R3503	M6	RB1704	*F5	RB2500	C4	TP710	P7
CL3504	*M6	IC5	C8	L2300	*D5	R310	P6	R702	M8	R815	J8	R912	K8	R1106	*H8	R1438	*R2	R1662	*G5	R1911	F12	R2127	H12	R2430	*E6	R2646	*C5	R2862	*C11	R3504	M6	RB1705	*F5	RB2501	C4	TP711	P7
CL3505	*M6	IC11	H5	L2301	*D5	R311	M3	R703	R13	R816	*J8	R913	K8	R1107	*D8	R1439	*R2	R1663	G5	R1912	F12	R2128	*H12	R2431	*E5	R2647	*C5	R2863	C11	R3505	*M6	RB1706	*F5	RB2502	C4	TP712	P7
CL3506	*M6	IC12	F5	L2500	*C5	R312	N9	R704	R12	R817	*J8	R914	K8	R1108	*D8	R1440	*R2	R1664	*G5	R1913	F12	R2129	*H12	R2432	D6	R2648	*C5	R2864	*C11	R3506	*N6	RB1707	*G5	RB2503	C4	TP3501	P6
CL3507	*M6	IC13	F11	L2501	*C5	R313	F1	R705	R13	R818	*J8	R915	K8	R1201	A6	R1441	*R2	R1665	*J5	R1914	*F12	R2130	*H12	R2433	D6	R2649	C6	R2865	*B11	R3507	*M6	RB1708	*F5	RB2504	*B5	TP3502	P6
CL3508	*M6	IC14	H11	L2700	*B11	R314	F1	R706	R12	R819	*J8	R916	K8	R1202	A6	R1442	*R2	R1666	H7	R1915	*F12	R2131	*H12	R2434	D6	R2650	C6	R2866	C8	R3508	*N6	RB1709	F5	RB2505	*C5	TP3503	P6
CL3509	*M8	IC15	D5	L2701	*B11	R315	D1	R707	*M5	R820	*J8	R917	K8	R1203	A6	R1443	*R3	R1700	F4	R1916	*G12	R2132	*H12	R2435	*D6	R2651	C6	R2900	D11	R3509	M8	RB1710	F5	RB2506	*C5	TP3504	P7
CL3510	*M8	IC16	C5	L2900	*D11	R316	F1	R708	*M5	R821	J8	R918	*K8	R1204	A6	R1444	*R3	R1701	F4	R1917	*F12	R2133	*H12	R2436	D6	R2652	*C6	R2901	D11	R3510	M8	RB1711	F4	RB2507	*C5	TP3505	J10
CL3511	*M8	IC17	C11	L2901	*D11	R317	D1	R709	*M7	R822	J8	R919	*K8	R1205	A6	R1445	*R3	R1702	F4	R1918	F12	R2221	*G9	R2437	D6	R2653	C5	R2902	D11	R3511	M8	RB1712	F4	RB2508	*B5	TP3506	J10
CL3512	*M8	IC18	D11	L3101	*N5	R318	D1	R710	*M7	R823	*J8	R920	*K8	R1206	A6	R1446	*R3	R1703	*F5	R1919	F12	R2222	G9	R2438	D6	R2654	C6	R2903	*D11	R3512	M8	RB1713	G4	RB2509	B5	TP3507	J10
CL3513	*M8	IC201	*P1	L3102	*N5	R319	D1	R711	R13	R824	*J8	R921	*K8	R1207	A6	R1447	*R3	R1704	*F5	R1920	*G12	R2223	G9	R2439	D5	R2655	C6	R2904	*E11	R3513	M8	RB1714	*F4	RB2510	B5	TP3508	J10
CL3514	*M8	IC301	P6	L3103	*N5	R320	D1	R712	R12	R825	*K8	R922	J9	R1208	*M5	R1448	*R3	R1705	F4	R1921	*G12	R2224	*G9	R2440	E6	R2656	C5	R2905	E11	R3514	*M8	RB1715	F4	RB2511	B4		
CL3515	*M8	IC302	N3	L3104	*N5	R321	D1	R713	R13	R826	*J9	R923	*J9	R1209	*M5	R1449	*R3	R1706	F4	R1922	F12	R2225	G9	R2441	E6	R2657	C5	R2906	D11	R3515	*M8	RB1716	*F4	RB2512	B4	X501	P8
CL3516	*M8	IC303	N9	L3105	*N8	R322	A5	R714	R12	R827	*J8	R924	K8	R1210	*M5	R1450	*R2	R1707	F4	R1923	F12	R2226	G9	R2442	*D7	R2658	*C5	R2907	D11	R3516	*M8	RB1821	F5	RB2513	C4	X502	P8
CL4001	*H8	IC304	G4	L3106	*N7	R323	A5	R715	*M6	R828	K8	R925	*K8	R1211	*M5	R1451	*R2	R1708	F4	R1924	F12	R2227	*H10	R2443	*D7	R2659	B5	R2908	E11	R3517	*M8	RB1822	F6	RB2514	*B4	X503	P8
CL4002	*H8	IC305	C4	L3107	*N8	R324	D1	R716	*M6	R829	*K9	R926	K8	R1212	*A6	R1452	*R2	R1709	F4	R1925	F12	R2228	H10	R2444	D7	R2660	*B5	R2909	E11	R4001	*F7	RB1823	F6	RB2515	B4	X601	P9
CL4003	*H8	IC306	G12	L3108	*N8	R325	F1	R717	*M6	R830	*K9	R927	J9	R1213	B6	R1453	*R2	R1710	F4	R1926	F12	R2229	*G11	R2445	*E5	R2661	*B5	R2910	E12	R4002	*F7	RB1824	F6	RB2516	*C4	X602	P9
CL4004	*H8	IC307	C12	L3109	*L5	R326	F1	R718	*M6	R831	K9	R928	*J9	R1214	B6	R1454	*R2	R1711	F4	R1927	F12	R2230	*H10	R2446	*E5	R2662	*B5	R2911	E12	R4003	*H8	RB1825	F6	RB2621	B5	X603	P9
CL4005	*H8	IC308	D1	L3110	*L5	R327	D1	R719	M6	R832	*J8	R929	J9	R1215	B6	R1455	*R2	R1712	G4	R1928	*G12	R2231	*G11	R2447	*E5	R2663	B5	R2912	D12	R4004	*H8	RB1826	F5	RB2622	B6	X701	E9
CL4006	*H8	IC309	F1	L3111	*M6	R328	F1	R720	M6	R833	*J8	R930	J8	R1216	B6	R1456	*R2	R1713	F4	R1929	*G12	R2232	H10	R2448	*E5	R2664	*B5	R2913	E12	R4005	*H8	RB1827	F5	RB2623	B6		
CL4007	*H8	IC401	P12	L3112	*L7	R329	A5	R721	*M6	R834	J8	R931	*J8	R1217	B6	R1457	*R2	R1714	*F4	R1930	*F12	R2233	H10	R2449	E6	R2665	*C5	R2914	*D12	R4006	*H8	RB1828	F5	RB2624	B6		
CL4008	*H8	IC402	*M12	L3113	*L7	R330	A5	R722	*M6	R835	J8	R932	*J8	R1218	B6	R1458	*R2	R1715	*F4	R1931	*F12	R2234	H10	R2450	E6	R2666	C7	R2915	*D12	R4501	*B7	RB1900	F11	RB2625	B6		
CL4009	G7	IC403	*M12	L3114	*M9	R331	F1	R723	*M4	R836	*J8	R933	J8	R1219	B7	R1500	H4	R1716	*F4	R1932	*F12	R2235	*H10	R2451	E6	R2700	B11	R2916	*E12	R4502	*B7	RB1901	F11	RB2626	B5		
CL4501	*D8	IC404	*M12	L4001	*H8	R332	F1	R724	*M4	R837	*J8	R934	J8	R1220	B7	R1501	H4	R1717	*F4	R1933	*F12	R2236	J10	R2452	*E6	R2701	C11	R2917	*D12	R4503	*D8	RB1902	F11	RB2627	B5		
CL4502	*D8	IC501	P8	L4002	*F8	R333	F1	R725	*M4	R838	J8	R935	*J8	R1221	B6	R1502	H4	R1718	G4	R2021	*G9	R2237	J10	R2453	E5	R2702	C11	R2918	D12	R4504	*D8	RB1903	F11	RB2628	B5		
CL4503	*D8	IC502	R8	L4003	*H7	R334	F1	R726	*M4	R839	K9	R936	*J8	R1222	B6	R1503	*H5	R1719	G4	R2022	F8	R2238	H10	R2454	E6	R2703	*B11	R2919	D12	R4505	*D8	RB1904	*F11	RB2700	B11		
CL4504	*D8	IC503	*P8	L4004	*H9	R335	A4	R727	*M4	R840	K8	R937	J8	R1223	B6	R1504	*G5	R1720	*F4	R2023	F8	R2239	J10	R2455	E6	R2704	*C11	R2920	*E12	R4506	*D8	RB1905	*F11	RB2701	B11		
CL4505	*D8	IC504	*P8	L4005	*G7	R336	A4	R728	M4	R841	*K8	R938	*J8	R1224	B6	R1505	G4	R1721	*F4	R2024	*G9	R2240	G10	R2456	E5	R2705	C11	R2921	*E12			RB1906	*F11	RB2702	B11		
CL4506	*D8	IC505	R8	L4006	*G9	R337	F1	R729	M4	R842	*K9	R939	J8	R1225	B6	R1506	H4	R1722	G4	R2025	F8	R2241	H10	R2457	E5	R2706	C11	R2922	D12	RB901	R11	RB1907	*F11	RB2703	B11		
CL4507	*D8	IC506	*P9	L4501	*D8	R338	F1	R730	M4	R843	K9	R940	*K8	R1226	B6	R1507	H4	R1723	G4	R2026	F8	R2242	G9	R2458	*E5	R2707	C11	R2923	D12	RB902	R11	RB1908	*G11	RB2704	*C11		
CL4508	*D8	IC507	P9	L4502	*B8	R339	A4	R731	M4	R844	K9	R941	K8	R1227	B6	R1508	H4	R1724	F4	R2027	*F10	R2243	G9	R2459	D5	R2708	C11	R2924	E12	RB903	R11	RB1909	G11	RB2705	*B11		
CL4509	C7	IC508	P8	L4503	*D7	R340	A4	R732	M4	R845	*K9	R942	K8	R1228	B6	R1509	H4	R1725	F4	R2028	F10	R2244	G9	R2460	*D5	R2709	C11	R2925	E12	RB904	R12	RB1910	G11	RB2706	*B11		
		IC509	P8	L4504	*D9	R401	A7	R733	*M4	R846	*K9	R943	K8	R1229	*M7	R1510	H4	R1726	F4	R2029	*E11	R2245	*G11	R2461	*D5	R2710	C12	R2926	E12	RB905	*R11	RB1911	G11	RB2707	*B11		
CN401	K11	IC510	P9	L4505	*D7	R402	A7	R734	*M4	R847	K9	R944	*K8	R1230	*M7	R1511	H4	R1727	F4	R2030	*F10	R2246	*G11	R2462	*D5	R2711	C12	R2927	E12	RB906	*R11	RB1912	F11	RB2708	*C11		
CN402	N12	IC511	P8	L4506	*C9	R403	*P12	R735	*M4	R848	K8	R945	*K8	R1231	*M7	R1512	H4	R1728	*F4	R2031	*E11	R2247	*G11	R2463	D5	R2712	B12	R2928	*E12	RB907	*R11	RB1913	F12	RB2709	C11		
CN1201	A6	IC601	R12			R404	*P12	R736	*M4	R849	*J9	R946	*K8	R1232	*M7	R1513	H4	R1729	*F4	R2032	F10	R2248	*G11	R2464	*D5	R2713	C12	R2929	*E12	RB908	*R12	RB1914	*G12	RB2710	C11		
		IC602	R9	Q201	*R1	R405	*P12	R737	*M4	R850	J9	R947	*K8	R1233	*M7	R1514	*H4	R1730	*F4	R2033	F10	R2249	G10	R2465	*E5	R2714	*B12	R2930	*D12	RB909	*R11	RB1915	F12	RB2711	C11		
CNT1	R2	IC603	P12	Q202	*R1	R406	*P12	R738	M4	R851	J9	R948	K8	R1234	J9	R1515	*H4	R1731	*F4	R2034	F10	R2250	G10	R2466	D7	R2715	*B12	R2931	*D12	RB910	*R11	RB1916	*F12	RB2712	C11		
CNW1	R5	IC604	R10	Q203	*R1	R407	*P12	R739	M4	R852	*J9	R949	K8	R1235	J9	R1516	*H4	R1732	*F4	R2035	*F10	R2251	G10	R2500	C4	R2716	*C12	R2932	*D12	RB911	*R11	RB2021	G10	RB2713	B12		
CNZ1	R12	IC605	*P9	Q204	*R1	R408	*M12	R740	M4	R853	J8	R950	K8	R1236	B6	R1517	*H4	R1733	*F4	R2036	G10	R2252	*G10	R2501	C4	R2717	*B12	R2933	*D12	RB912	*R12	RB2022	G10	RB2714	*C12		
		IC606	*P9	Q205	*R1	R409	*M12	R741	M4	R854	J9	R951	K8	R1237	B6	R1518	H4	R1821	*G7	R2037	G10	R2253	G10	R2502	C4	R2718	B12	R3021	*D9	RB913	P11	RB2023	G10	RB2715	C12		
D201	*R1	IC607	*P10	Q301	P6	R410	*M11	R742	M4	R855	*J9	R952	K8	R1238	*H7	R1519	H4	R1822	G7	R2038	F10	R2254	G10	R2503	*C5	R2719	B12	R3022	D9	RB914	P11	RB2024	G10	RB2716	*B12		
D202	R1	IC608	P9	Q302	M3	R411	*M12	R743	*M8	R856	*J9	R953	K8	R1239	*H7	R1520	*H4	R1823	G7	R2039	G10	R2255	G10	R2504	*B5	R2720	*C12	R3023	D9	RB915	P11	RB2025	G10	RB2821	C10		
D203	A3	IC609	P10	Q303	N9	R412	*M13	R744	*M8	R857	*J9	R954	*J8	R1240	*F7	R1521	*H4	R1824	*G7	R2040	F10	R2256	G11	R2505	B4	R2721	*C12	R3024	*D9	RB916	P12	RB2026	G11	RB2822	C10		
D301	A5	IC610	P9	Q304	D1	R413	*P12	R745	*M8	R858	J9	R955	J8	R1241	*G7	R1522	H4	R1825	G7	R2041	F10	R2257	G11	R2506	B4	R2722	B12	R3025	D9	RB917	*P11	RB2027	G11	RB2823	C10		
D302	A5	IC611	P9	Q305	*A5	R414	*P12	R746	*M8	R859	J9	R981	P12	R1242	*G7	R1523	H4	R1826	G7	R2042	*G9	R2258	*G11	R2507	B4	R2723	B12	R3026	D9	RB918	*P11	RB2028	G11	RB2824	C10		
D303	A4	IC612	P10	Q306	D1	R415	*P12	R747	*M7	R860	*J9	R982	P12	R1243	*G7	R1524	H4	R1827	*G6	R2043	*G9	R2259	J11	R2508	B4	R2724	C12	R3027	*D10	RB919	*P11	RB2100	G11	RB2825	C10		
D304	A4	IC613	P9	Q307	*A5	R416	*P12	R748	*M7	R861	J9	R983	P12	R1244	*M8	R1525	H4	R1828	G6	R2044	F8	R2260	*J11	R2509	B4	R2725	C12	R3028	D10	RB920	*P12	RB2101	H11	RB2826	C11		
D401	A7	IC701	R13	Q308	F1	R417	*P12	R749	*M7	R862	J9	R984	P12	R1245	*M8	R1526	H4	R1829	*G5	R2045	*F11	R2261	*J11	R2510	B4	R2726	C12	R3029	*D11	RB921	*P11	RB2102	H11	RB2827	C11		
D402	A7	IC702	E9	Q309	*A4	R501	*R8	R750	*M7	R863	J8	R985	P12	R1246	*D7	R1527	H4	R1830	*G6	R2046	*F11	R2262	*J11	R2511	B4	R2727	C12	R3030	*D10	RB922	*P11	RB2103	H11	RB2828	C11		
D801	A11	IC703	E9	Q310	F1	R502	*R8	R751	*M7	R864	J8	R986	J11	R1247	*D7	R1528	*H4	R1831	*G5	R2047	*F11	R2263	J11	R2512	C4	R2728	*C12	R3031	*D11	RB923	*P11	RB2104	*H11	RB2900	D11		
D802	A11	IC801	A11	Q311	*A4	R503	*R8	R752	M7	R865	K8	R987	J11	R1248	*C7	R1529	*H4	R1832	F6	R2048	*F11	R2264	*J11	R2513	B4	R2729	*C12	R3032	D10	RB1001	R11	RB2105	*H11	RB2901	D11		
		IC901	R11	Q501	*P8	R504	*R8	R753	M7	R866	*K9	R988	J11	R1249	*C7	R1530	*H4	R1833	F6	R2049	F10	R2265	*G11	R2514	*C4	R2730	*B12	R3033	D10	RB1002	R11	RB2106	*H11	RB2902	D11		
DD201	E2	IC902	P11	Q502	*P8	R505	*R8	R754	M7	R867	*K9	R989	J11	R1250	*C7	R1531	*H4	R1834	F6	R2050	E10	R2266	*G9	R2515	*C4	R2731	*B12	R3034	E10	RB1003	R11	RB2107	*H11	RB2903	D11		
DD202	K2	IC903	P12	Q503	*P9	R506	*R8	R755	M7	R868	K9	R990	P12	R1251	*C7	R1532	*H4	R1835	*F6	R2051	E10	R2300	E4	R2516	*B4	R2732	*B12	R3035	*E10	RB1004	R11	RB2108	*H11	RB2904	*D11		
DD203	C2	IC904	J11	Q601	*P9	R507	*R8	R756	M7	R869	*J8	R991	P12	R1252	*H9	R1533	*H4	R1836	F6	R2052	*F10	R2301	D4	R2517	*C4	R2733	*B12	R3036	E10	RB1005	*R11	RB2109	J11	RB2905	*D11		
DD204	H2	IC1001	R11	Q602	*P9	R508	*R9	R757	*M7	R870	*J8	R992	P12	R1253	*D9	R1621	G7	R1837	F6	R2053	E10	R2302	D4	R2518	C4	R2821	*C9	R3037	E10	RB1006	*R11	RB2110	J11	RB2906	*D11		
		IC1002	P13	Q603	*P10	R509	*P8	R758	*M7	R871	J8	R993	P12	R1254	A6	R1622	G7	R1838	F6	R2054	E10	R2303	*E5	R2519	C4	R2822	C8	R3038	E10	RB1007	*R11	RB2111	H11	RB2907	*D11		
E1	P11	IC1003	P13			R510	*R8	R759	*M7	R872	J8	R994	P12	R1301	H8	R1623	G7	R1839	F5	R2055	E10	R2304	*D5	R2520	*B4	R2823	C8	R3039	E10	RB1008	*R11	RB2112	H11	RB2908	*E11		
E2	P7	IC1004	P11	R201	A3	R511	R9

Components locations list; previous page

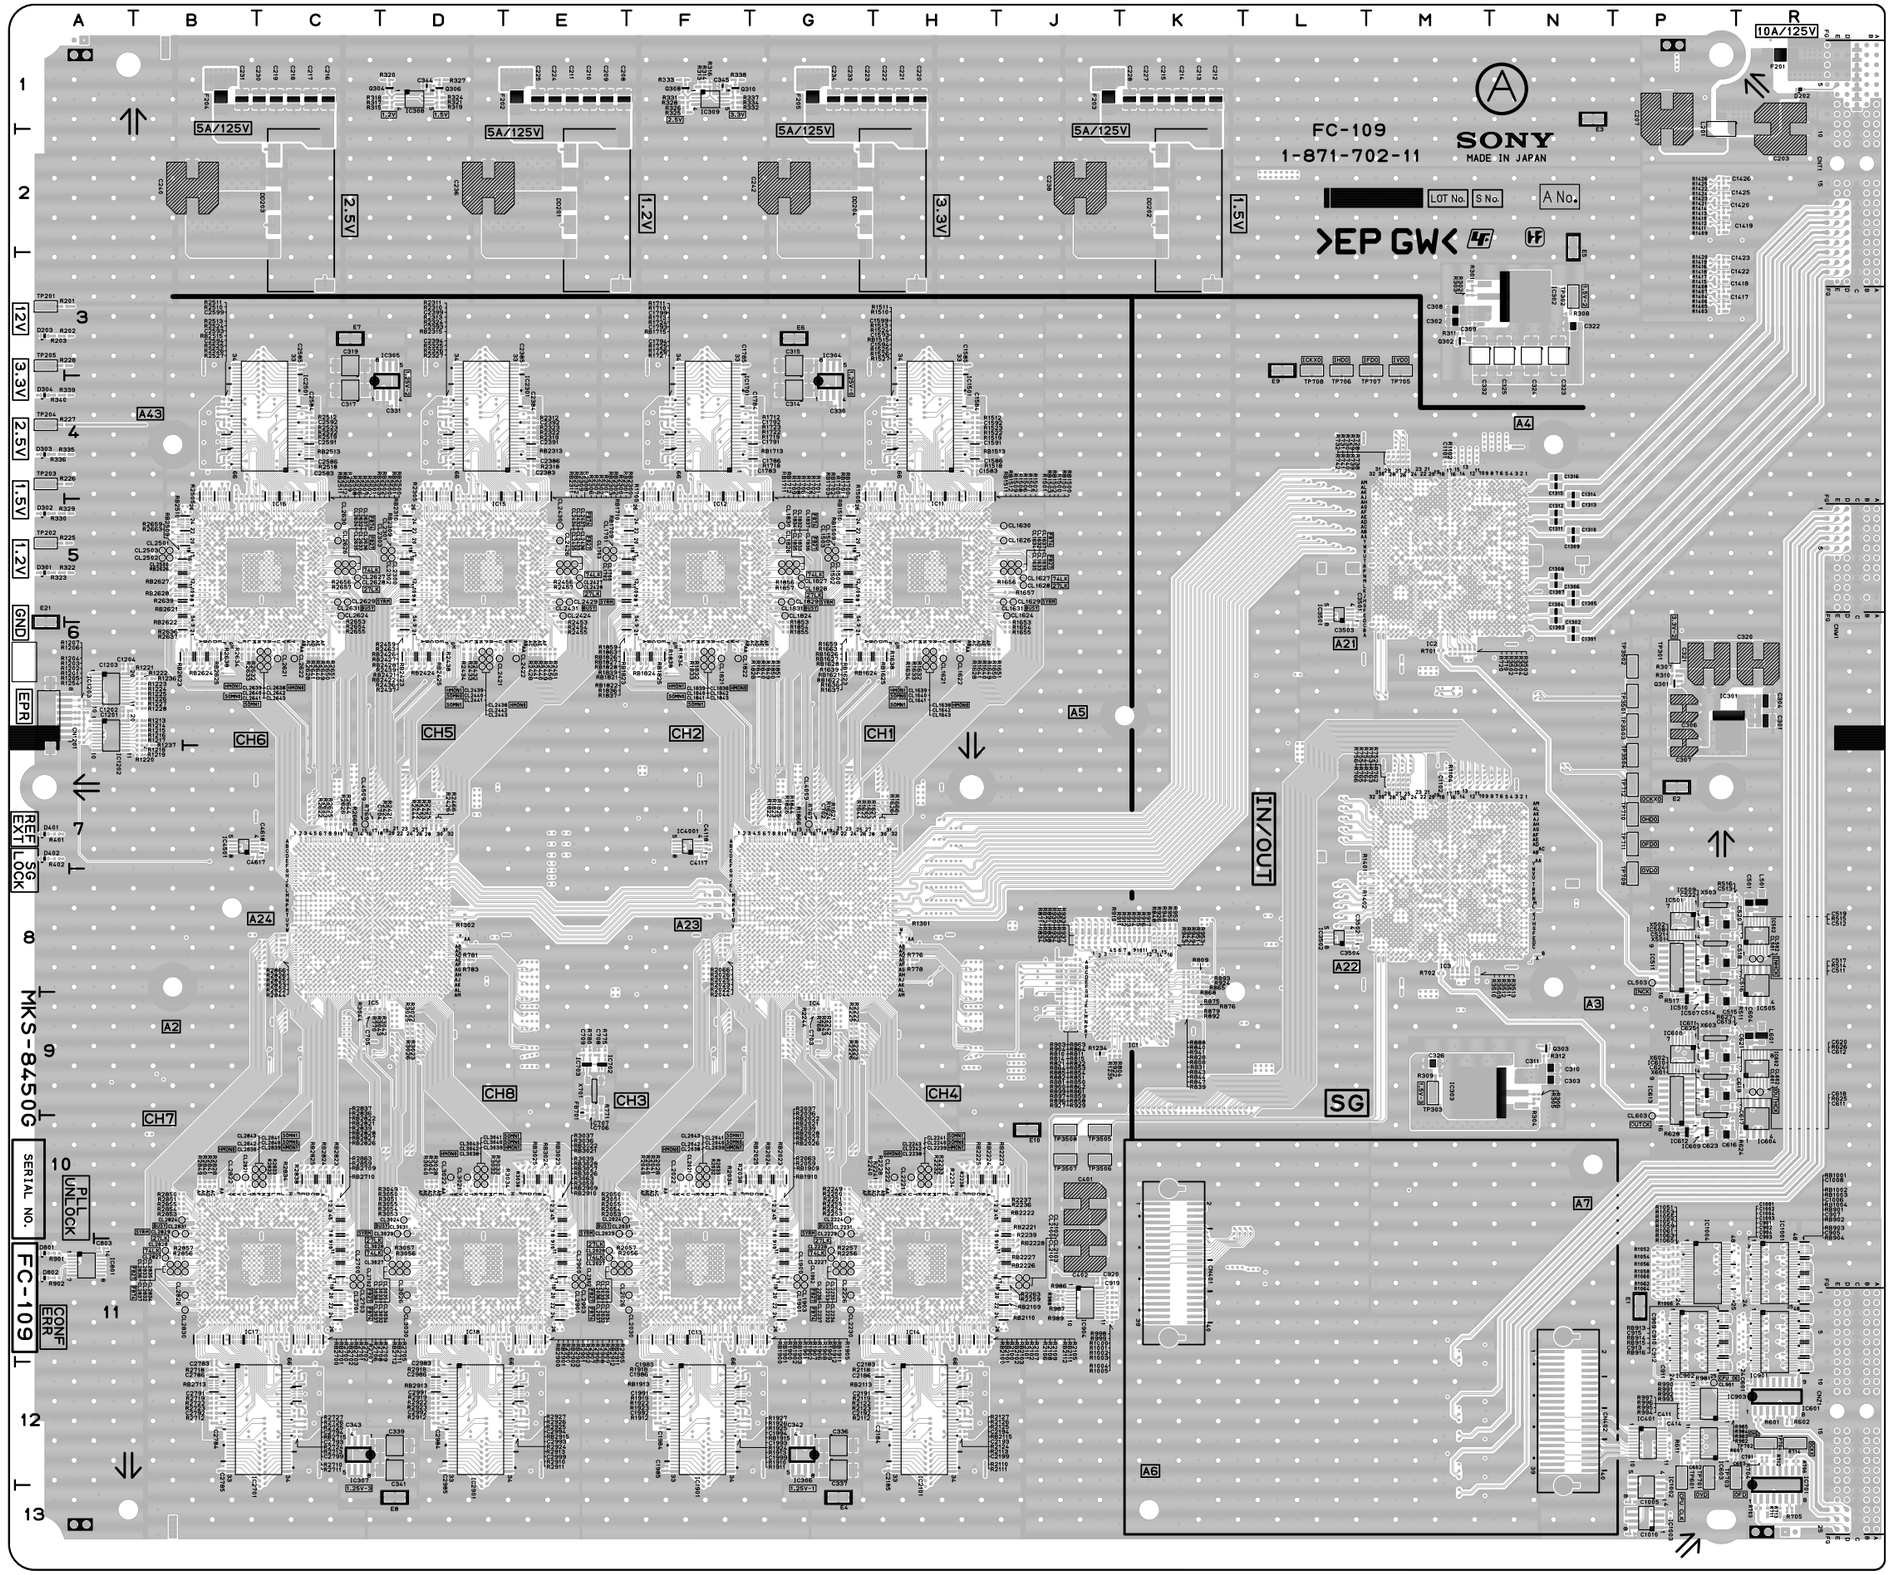

FC-109 -A SIDE-
SUFFIX: -11

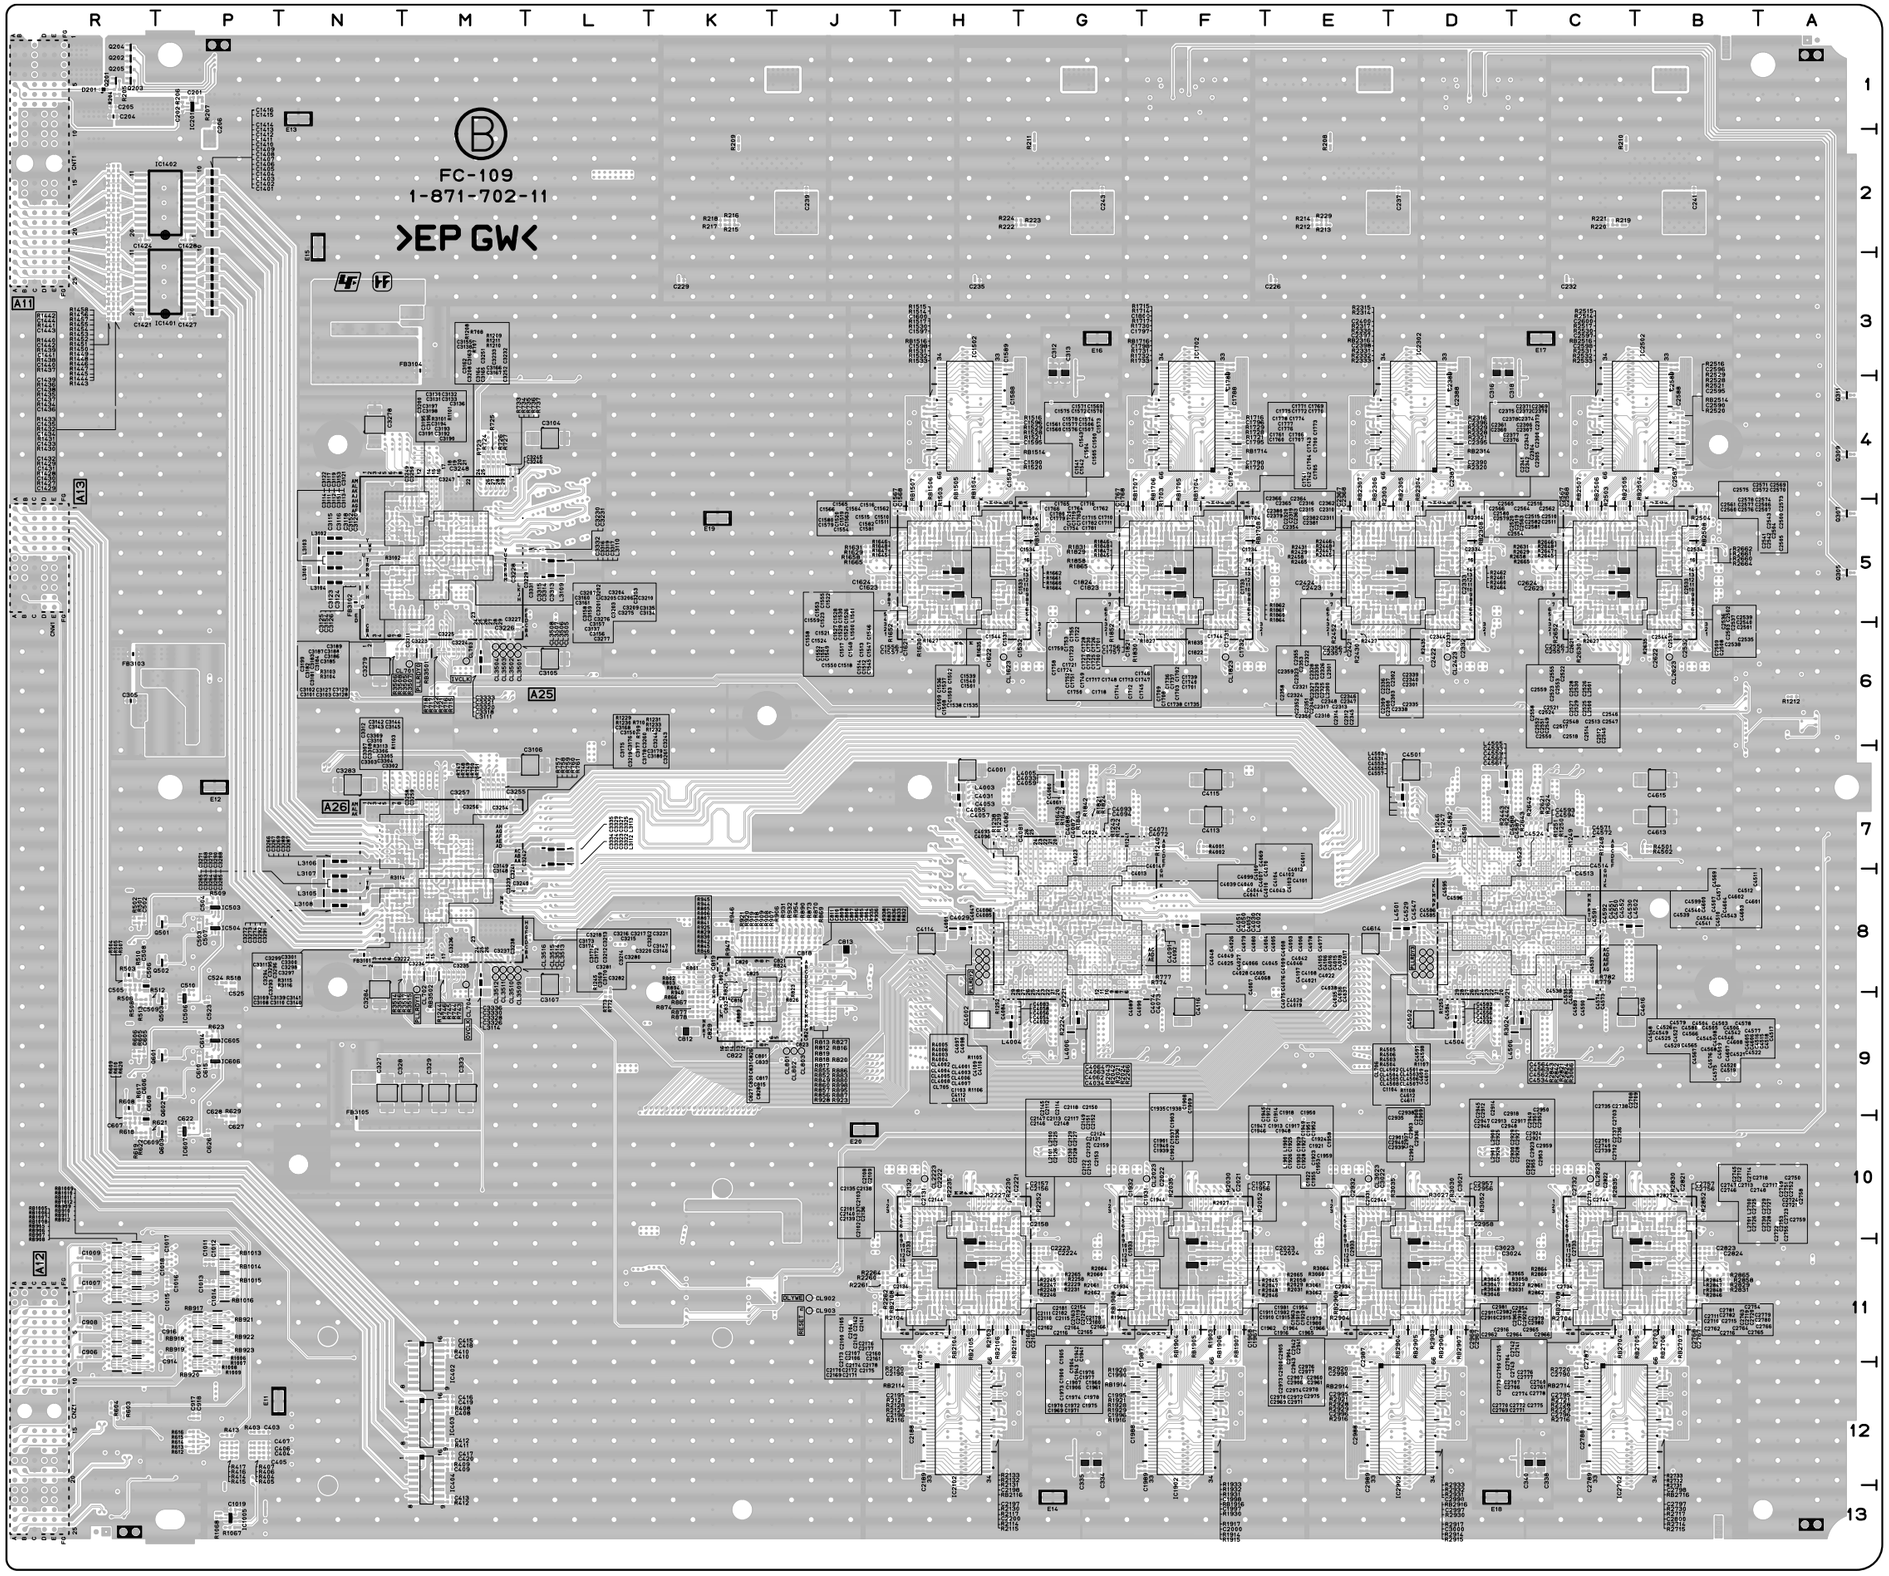


FC-109 -B SIDE-
SUFFIX: -11

FC-109 (1-871-702-12)
---
*:B SIDE


C201	*P1	C410	*M11	C825	*K8	C1426	P2	C1578	*H5	C1762	*F5	C1946	*F10	C2130	*H11	C2314	*D5	C2423	*E5	C2595	*B4	C2779	*B11	C2963	*D11	C3148	*M8	C3245	*M4	C4002	*H9	C4099	*G8	C4578	*C8	CL1829	G5
C202	*P1	C411	P12	C826	*K8	C1427	*P3	C1579	*H5	C1763	*F5	C1947	*F10	C2131	*H10	C2315	*D5	C2424	*E5	C2596	*B4	C2780	*B11	C2964	*D11	C3149	*M7	C3246	*M4	C4003	*G8	C4100	*G8	C4579	*D8	CL1830	G5
C203	R1	C412	*M12	C827	*K9	C1428	*P2	C1580	*H5	C1764	*F5	C1948	*F10	C2132	*H10	C2316	*D5	C2500	*B5	C2597	*C4	C2781	*B11	C2965	*D11	C3150	*M7	C3247	*M4	C4004	*G8	C4101	*G8	C4580	*D8	CL1831	G5
C204	*R1	C413	*M13	C828	*K9	C1429	*R3	C1581	*H5	C1765	*F5	C1949	*F10	C2133	*H10	C2317	*E5	C2501	*B5	C2598	*C4	C2782	*B11	C2966	*D11	C3151	*N5	C3248	*M4	C4005	*G8	C4102	*G8	C4581	*D7	CL1832	G5
C205	*R1	C414	P12	C829	*K9	C1430	*R3	C1582	*H5	C1766	*G5	C1950	*F10	C2134	*H11	C2318	*D5	C2502	*B5	C2599	B4	C2783	B12	C2967	*D11	C3152	*N5	C3249	*M4	C4006	*G8	C4103	*G8	C4582	*D7	CL1833	G5
C206	*P1	C415	*M11	C830	*K9	C1431	*R3	C1583	H4	C1767	*G5	C1951	*F10	C2135	*H10	C2319	*E5	C2503	*B5	C2600	*C4	C2784	B12	C2968	*D11	C3153	*N5	C3250	*M4	C4007	*G8	C4104	*G8	C4583	*D9	CL1834	G5
C207	P1	C416	*M12	C831	*K8	C1432	*R3	C1584	H4	C1768	*G5	C1952	*F10	C2136	*H11	C2320	*E5	C2504	*B5	C2601	B4	C2785	B12	C2969	*E11	C3154	*N5	C3251	*M5	C4008	*G8	C4105	*G8	C4584	*D9	CL1835	G5
C208	E1	C417	*M12	C832	*K9	C1433	*R3	C1585	H3	C1769	*F5	C1953	*F11	C2137	*H11	C2321	*E5	C2505	*B5	C2602	C4	C2786	B12	C2970	*E11	C3155	*M5	C3252	*M5	C4009	*G8	C4106	*G8	C4585	*D8	CL1836	G5
C209	E1	C418	*M11	C833	*K8	C1434	*R3	C1586	H4	C1770	*F5	C1954	*F11	C2138	*H10	C2322	*E5	C2506	*B5	C2603	B4	C2787	*C11	C2971	*E11	C3156	*M5	C3253	*M5	C4010	*G8	C4107	*G8	C4586	*D8	CL1837	G5
C210	E1	C419	*M12	C901	R11	C1435	*R3	C1587	*H4	C1771	*F5	C1955	*F11	C2139	*H11	C2323	*E5	C2507	*B5	C2604	C4	C2788	*C12	C2972	*E11	C3157	*M5	C3254	*M7	C4011	*G8	C4108	*G8	C4587	*C7	CL1838	F6
C211	E1	C420	*M12	C902	R11	C1436	*R2	C1588	*H4	C1772	*F5	C1956	*F10	C2140	*H11	C2324	*E5	C2508	*B6	C2605	*B4	C2789	*C12	C2973	*E11	C3158	*M5	C3255	*M7	C4012	*G8	C4109	*H8	C4588	*D7	CL1839	F6
C212	K1	C501	R8	C903	R11	C1437	*R2	C1589	*H3	C1773	*F5	C1957	*F10	C2141	*H11	C2325	*D5	C2509	*B5	C2606	*C4	C2790	*C12	C2974	*E11	C3159	*M5	C3256	*M7	C4013	*G8	C4110	*H8	C4589	*C9	CL1840	F6
C213	K1	C502	*R8	C904	R11	C1438	*R2	C1590	*H4	C1774	*F5	C1958	*F11	C2142	*H11	C2326	*D5	C2510	*C5	C2607	*B4	C2791	B12	C2975	*E11	C3160	*M5	C3257	*M7	C4014	*G8	C4111	*H8	C4590	*C9	CL1841	F6
C214	K1	C503	*P8	C905	R11	C1439	*R2	C1591	H4	C1775	*F5	C1959	*F11	C2143	*H11	C2327	*E5	C2511	*C5	C2608	*C4	C2792	B12	C2976	*E11	C3161	*M5	C3258	*M7	C4015	*G8	C4112	*H8	C4591	*C8	CL1842	F6
C215	K1	C504	*P8	C906	*R11	C1440	*R2	C1592	H4	C1776	*F5	C1960	*F11	C2144	*H10	C2328	*E5	C2512	*C5	C2621	*C6	C2793	C12	C2977	*E11	C3162	*M5	C3259	*M7	C4016	*G8	C4113	*F7	C4592	*C8	CL1843	F6
C216	C1	C505	*R8	C907	R11	C1441	*R2	C1593	H4	C1777	*F5	C1961	*F11	C2145	*H10	C2329	*E5	C2513	*C5	C2622	*B6	C2794	C12	C2978	*E11	C3163	*M5	C3260	*M7	C4017	*G8	C4114	*H8	C4593	*C7	CL1900	G11
C217	C1	C506	*R8	C908	*R11	C1442	*R2	C1594	H4	C1778	*F5	C1962	*F11	C2146	*H10	C2330	*E5	C2514	*C5	C2623	*C5	C2795	*C12	C2979	*D11	C3164	*M5	C3261	*M8	C4018	*G8	C4115	*F7	C4594	*C7	CL1901	G11
C218	C1	C507	*P8	C909	P11	C1443	*R2	C1595	*H4	C1779	*F5	C1963	*F11	C2147	*H10	C2331	*D6	C2515	*C5	C2624	*C5	C2796	*C12	C2980	*D11	C3165	*M5	C3262	*M8	C4019	*G8	C4116	*F9	C4595	*D8	CL1902	G11
C219	C1	C508	*R8	C910	P11	C1444	*R2	C1596	*H4	C1780	*F5	C1964	*F11	C2148	*H10	C2332	*D6	C2516	*C5	C2700	*C11	C2797	*B12	C2981	*D11	C3166	*M5	C3263	*N8	C4020	*G8	C4117	F7	C4596	*D8	CL1903	G11
C220	H1	C509	*R9	C911	P11	C1500	*H5	C1597	*H4	C1781	*F5	C1965	*F11	C2149	*H10	C2333	*D5	C2517	*C5	C2701	*C10	C2798	*B12	C2982	*D11	C3167	*M5	C3264	*N8	C4021	*G8	C4118	F7	C4597	*D8	CL2021	F10
C221	H1	C510	*P8	C912	P11	C1501	*H5	C1598	*H4	C1782	*F5	C1966	*F11	C2150	*H10	C2334	*D5	C2518	*C5	C2702	*C11	C2799	C12	C2983	D12	C3168	*M7	C3265	*N8	C4022	*G8	C4501	*D7	C4598	*D8	CL2022	F10
C222	H1	C511	P8	C913	P11	C1502	*H5	C1599	H4	C1783	G4	C1967	*F11	C2151	*H10	C2335	*D5	C2519	*C5	C2703	*C10	C2800	*B12	C2984	D12	C3169	*M8	C3266	*N7	C4023	*G7	C4502	*D9	C4599	*D8	CL2023	*F10
C223	G1	C512	P8	C914	*P11	C1503	*H5	C1600	*H4	C1784	G4	C1968	*F11	C2152	*H10	C2336	*D5	C2520	*C5	C2704	*C11	C2801	C12	C2985	D12	C3170	*M8	C3267	*N7	C4024	*G7	C4503	*C8	C4600	*D8	CL2024	E10
C224	E1	C513	P8	C915	P11	C1504	*H5	C1601	H4	C1785	F3	C1969	*G11	C2153	*H11	C2337	*D5	C2521	*C5	C2705	*C11	C2802	B12	C2986	D12	C3171	*M8	C3268	*N8	C4025	*G8	C4504	*D8	C4601	*C8	CL2026	F11
C225	E1	C514	P9	C916	*P11	C1505	*H5	C1602	H4	C1786	G4	C1970	*G11	C2154	*H11	C2338	*D5	C2522	*C5	C2706	*C11	C2803	C12	C2987	*E11	C3172	*M8	C3269	*N7	C4026	*G8	C4505	*C8	C4602	*C8	CL2027	E11
C226	*E3	C515	P9	C917	*P12	C1506	*H5	C1603	H4	C1787	*F4	C1971	*F11	C2155	*H11	C2339	*D5	C2523	*C5	C2707	*C11	C2804	B12	C2988	*E12	C3173	*M8	C3270	*N8	C4027	*G8	C4506	*C8	C4603	*C8	CL2028	E11
C227	K1	C516	P8	C918	*P12	C1507	*H5	C1604	H4	C1788	*F4	C1972	*F11	C2156	*G10	C2340	*D5	C2524	*C5	C2708	*C10	C2805	*C12	C2989	*E12	C3174	*M8	C3271	*N8	C4028	*G8	C4507	*C8	C4604	*C8	CL2029	E10
C228	K1	C517	P8	C919	J11	C1508	*H6	C1605	*G4	C1789	*F3	C1973	*G11	C2157	*G10	C2341	*D5	C2525	*C5	C2709	*C10	C2806	*B12	C2990	*E12	C3175	*M7	C3272	*N8	C4029	*H8	C4508	*C8	C4605	*C8	CL2030	F11
C229	*K3	C518	P8	C920	J11	C1509	*H5	C1606	*H4	C1790	*F4	C1974	*F11	C2158	*G10	C2342	*D5	C2526	*C5	C2710	*C11	C2807	*C12	C2991	D12	C3176	*M7	C3273	*N8	C4030	*F8	C4509	*C8	C4606	*C8	CL2031	F10
C230	C1	C519	P8	C1001	R11	C1510	*H5	C1607	*G4	C1791	G4	C1975	*F11	C2159	*H11	C2343	*D5	C2527	*C5	C2711	*C11	C2808	*B12	C2992	D12	C3177	*M7	C3274	*N8	C4031	*H7	C4510	*C8	C4607	*C8	CL2032	E11
C231	B1	C520	P8	C1002	R11	C1511	*H5	C1608	*H4	C1792	G4	C1976	*F11	C2160	*H11	C2344	*D6	C2528	*C5	C2712	*C10	C2821	*B10	C2993	E12	C3178	*M7	C3275	*M5	C4032	*H9	C4511	*C8	C4608	*C8	CL2033	E11
C232	*C3	C521	P8	C1003	R11	C1512	*H5	C1621	*H6	C1793	F4	C1977	*F11	C2161	*H11	C2345	*D5	C2529	*C5	C2713	*C10	C2822	*C10	C2994	E12	C3179	*M7	C3276	*M5	C4033	*G7	C4512	*C8	C4609	*D8	CL2034	F11
C233	G1	C522	P8	C1004	R11	C1513	*H5	C1622	*H6	C1794	F4	C1978	*F11	C2162	*H11	C2346	*D5	C2530	*C5	C2714	*C10	C2823	*B11	C2995	*E12	C3180	*M8	C3277	*M5	C4034	*G9	C4513	*C8	C4610	*D8	CL2035	F11
C234	G1	C523	*P9	C1005	P13	C1514	*H5	C1623	*J5	C1795	*F4	C1979	*F11	C2163	*H11	C2347	*D5	C2531	*B6	C2715	*B11	C2824	*B11	C2996	*E12	C3181	*N5	C3278	*N4	C4035	*G8	C4514	*C8	C4611	*D8	CL2036	E11
C235	*H3	C524	*P8	C1006	R11	C1515	*H5	C1624	*J5	C1796	*F4	C1980	*F11	C2164	*H11	C2348	*D5	C2532	*B6	C2716	*B11	C2900	*E11	C2997	*D12	C3182	*N5	C3279	*N6	C4036	*G8	C4515	*C8	C4612	*D8	CL2037	E11
C236	D2	C525	*P8	C1007	*R11	C1516	*H5	C1700	*F5	C1797	*F4	C1981	*F11	C2165	*H11	C2349	*E5	C2533	*B5	C2717	*B10	C2901	*E10	C2998	*D12	C3183	*N5	C3280	*M8	C4037	*G8	C4516	*C8	C4613	*B7	CL2038	F10
C237	*D2	C601	R12	C1008	R11	C1517	*H5	C1701	*F5	C1798	*F4	C1982	*F11	C2166	*H11	C2350	*E5	C2534	*B5	C2718	*B10	C2902	*E11	C2999	E12	C3184	*N5	C3281	*M8	C4038	*G8	C4517	*C8	C4614	*E8	CL2039	F10
C238	J2	C602	P12	C1009	*R11	C1518	*H5	C1702	*F5	C1799	F4	C1983	F12	C2167	*G11	C2351	*E5	C2535	*B5	C2719	*B11	C2903	*E10	C3000	*D12	C3185	*M5	C3282	*M8	C4039	*G8	C4518	*C8	C4615	*B7	CL2040	F10
C239	*J2	C603	P12	C1010	P13	C1519	*H5	C1703	*F5	C1800	*F4	C1984	F12	C2168	*G11	C2352	*E5	C2536	*B5	C2720	*B11	C2904	*E11	C3001	E12	C3186	*M5	C3283	*N7	C4040	*G8	C4519	*C8	C4616	*C9	CL2041	F10
C240	B2	C604	R9	C1011	*P11	C1520	*H5	C1704	*F5	C1801	F4	C1985	F12	C2169	*H11	C2353	*E5	C2537	*B5	C2721	*B11	C2905	*E11	C3002	D12	C3187	*N5	C3284	*N8	C4041	*G8	C4520	*C8	C4617	B7	CL2042	F10
C241	*B2	C605	*R9	C1012	*P11	C1521	*H5	C1705	*F5	C1802	G4	C1986	F12	C2170	*H11	C2354	*E5	C2538	*B5	C2722	*B11	C2906	*E11	C3003	E12	C3188	*N5	C3285	*N8	C4042	*G8	C4521	*C8	C4618	C7	CL2043	F10
C242	G2	C606	*R9	C1013	*P11	C1522	*H5	C1706	*F5	C1803	F4	C1987	*G11	C2171	*H11	C2355	*E5	C2539	*B5	C2723	*B11	C2907	*E11	C3004	D12	C3189	*M5	C3286	*N8	C4043	*G8	C4522	*C8			CL2100	J11
C243	*G2	C607	*R10	C1014	*P11	C1523	*H5	C1707	*F5	C1804	G4	C1988	*G12	C2172	*H11	C2356	*E5	C2540	*B5	C2724	*B10	C2908	*E10	C3005	*E12	C3190	*M5	C3287	*N7	C4044	*G8	C4523	*C7	CL501	R8	CL2101	J11
C301	R6	C608	*R10	C1015	*P11	C1524	*H5	C1708	*F6	C1805	*F4	C1989	*F12	C2173	*H11	C2357	*E6	C2541	*B5	C2725	*B11	C2909	*E10	C3006	*D12	C3191	*N5	C3288	*N8	C4045	*G8	C4524	*C7	CL502	R8	CL2102	J11
C302	M3	C609	*R10	C1016	*P11	C1525	*H5	C1709	*F5	C1806	*G4	C1990	*G12	C2174	*H11	C2358	*E5	C2542	*B5	C2726	*B11	C2910	*D11	C3007	*E12	C3192	*M5	C3289	*N7	C4046	*G8	C4525	*D8	CL503	P8	CL2103	J11
C303	N9	C610	*P9	C1017	*P11	C1526	*H5	C1710	*F5	C1807	*F4	C1991	F12	C2175	*H11	C2359	*E5	C2543	*B5	C2727	*B11	C2911	*D11	C3008	*D12	C3193	*M5	C3290	*N8	C4047	*H8	C4526	*D8	CL601	R9	CL2221	H10
C304	R6	C611	P9	C1018	*P11	C1527	*H5	C1711	*F5	C1808	*G4	C1992	F12	C2176	*H11	C2360	*D5	C2544	*B6	C2728	*B11	C2912	*D10	C3021	*D10	C3194	*M5	C3291	*N8	C4048	*H8	C4527	*D8	CL602	R9	CL2222	H10
C305	*R6	C612	P9	C1019	*P13	C1528	*H5	C1712	*F5	C1821	*G6	C1993	F12	C2177	*H11	C2361	*D5	C2545	*B5	C2729	*B11	C2913	*D10	C3022	*E10	C3195	*N5	C3292	*N8	C4049	*H8	C4528	*D8	CL603	P10	CL2223	*H10
C306	P6	C613	P9	C1101	M4	C1529	*H5	C1713	*F5	C1822	*F6	C1994	F12	C2178	*H11	C2362	*D5	C2546	*B5	C2730	*B11	C2914	*D10	C3023	*D11	C3196	*N5	C3293	*N8	C4050	*F8	C4529	*D8	CL701	*M6	CL2224	G10
C307	P6	C614	*P9	C1102	M7	C1530	*H5	C1714	*F5	C1823	*G5	C1995	*G12	C2179	*H11	C2363	*E5	C2547	*B5	C2731	*C10	C2915	*D11	C3024	*D11	C3197	*N5	C3294	*N8	C4051	*F8	C4530	*C8	CL702	*M8	CL2226	G11
C308	M3	C615	*P9	C1103	*H8	C1531	*H6	C1715	*F5	C1824	*G5	C1996	*G12	C2180	*H11	C2364	*E5	C2548	*C5	C2732	*C10	C2916	*D11	C3101	*N5	C3198	*N5	C3295	*N8	C4052	*F8	C4531	*D7	CL703	*M6	CL2227	G11
C309	M3	C616	P10	C1104	*D8	C1532	*G6	C1716	*F5	C1900	*G11	C1997	*F12	C2181	*H11	C2365	*E5	C2549	*C5	C2733	*C10	C2917	*D10	C3102	*N5	C3199	*N5	C3296	*N8	C4053	*H7	C4532	*D9	CL704	*M8	CL2228	G11
C310	N9	C617	P10	C1201	A6	C1533	*G5	C1717	*F5	C1901	*G10	C1998	*F12	C2182	*H11	C2366	*E5	C2550	*C5	C2734	*C11	C2918	*D10	C3103	*M5	C3200	*N5	C3297	*M8	C4054	*H9	C4533	*D7	CL705	*H8	CL2229	G10
C311	N9	C618	P9	C1202	A6	C1534	*G5	C1718	*F5	C1902	*F11	C1999	F12	C2183	H12	C2367	*E5	C2551	*C5	C2735	*C10	C2919	*D11	C3104	*L4	C3201	*M5	C3298	*M8	C4055	*H7	C4534	*C9	CL706	*D8	CL2230	G11
C312	*G3	C619	P9	C1203	A6	C1535	*H5	C1719	*F5	C1903	*F10	C2000	*F12	C2184	H12	C2368	*E5	C2552	*C5	C2736	*C11	C2920	*D11	C3105	*L6	C3202	*M5	C3299	*N8	C4056	*H9	C4535	*C8	CL801	*J9	CL2231	G10
C313	*G3	C620	P9	C1204	A6	C1536	*H5	C1720	*F5	C1904	*F11	C2001	G12	C2185	H12	C2369	*D5	C2553	*C5	C2737	*C11	C2921	*D11	C3106	*L7	C3203	*M5	C3300	*M8	C4057	*H7	C4536	*C8	CL802	*J9	CL2232	G11
C314	G4	C621	P9	C1301	N6	C1537	*H5	C1721	*F5	C1905	*G11	C2002	F12	C2186	H12	C2370	*D5	C2554	*C5	C2738	*C10	C2922	*D11	C3107	*L8	C3204	*M5	C3301	*M8	C4058	*H9	C4537	*C8	CL803	*J9	CL2233	G11
C315	G3	C622	*P10	C1302	N6	C1538	*H5	C1722	*F5	C1906	*F11	C2003	G12	C2187	*H11	C2371	*D5	C2555	*C5	C2739	*C11	C2923	*D11	C3108	*N8	C3205	*M5	C3302	*M7	C4059	*G7	C4538	*C8	CL901	P12	CL2234	G11
C316	*D3	C623	P10	C1303	N5	C1539	*H5	C1723	*G5	C1907	*F11	C2004	F12	C2188	*H12	C2372	*D5	C2556	*C5	C2740	*C11	C2924	*D10	C3109	*N8	C3206	*M5	C3303	*N7	C4060	*G7	C4539	*D8	CL902	*J11	CL2235	G11
C317	C4	C624	P9	C1304	N5	C1540	*H5	C1724	*G5	C1908	*F10	C2005	*G12	C2189	*H12	C2373	*D5	C2557	*C6	C2741	*C11	C2925	*D11	C3110	*M8	C3207	*M5	C3304	*M7	C4061	*G7	C4540	*D8	CL903	*J11	CL2236	G11
C318	*D3	C625	P9	C1305	N5	C1541	*H5	C1725	*F5	C1909	*F10	C2006	*H12	C2190	*H12	C2374	*D5	C2558	*C5	C2742	*C11	C2926	*D11	C3111	*N5	C3208	*M5	C3305	*M7	C4062	*G9	C4541	*D8	CL1500	G5	CL2237	G11
C319	C3	C626	*P10	C1306	N5	C1542	*H5	C1726	*F5	C1910	*F11	C2007	*H12	C2191	H12	C2375	*D5	C2559	*C5	C2743	*C11	C2927	*D11	C3112	*N5	C3209	*M5	C3306	*M7	C4063	*G9	C4542	*C8	CL1501	G5	CL2238	H10
C320	R6	C627	*P10	C1307	N5	C1543	*H5	C1727	*F5	C1911	*F11	C2008	*G12	C2192	H12	C2376	*D5	C2560	*B5	C2744	*C10	C2928	*D11	C3113	*N5	C3210	*M5	C3307	*N7	C4064	*G9	C4543	*C8	CL1502	G5	CL2239	H10
C321	P6	C628	*P10	C1308	N5	C1544	*H6	C1728	*F5	C1912	*F10	C2021	*F10	C2193	H12	C2377	*D5	C2561	*B5	C2745	*C10	C2929	*D11	C3114	*N5	C3211	*M6	C3308	*N7	C4065	*G8	C4544	*D8	CL1503	G5	CL2240	H10
C322	N3	C701	R12	C1309	N5	C1545	*H5	C1729	*F5	C1913	*F10	C2022	*F10	C2194	H12	C2378	*D5	C2562	*C5	C2746	*C10	C2930	*D11	C3115	*N5	C3212	*M8	C3309	*N7	C4066	*G8	C4545	*D8	CL1621	H6	CL2241	H10
C323	N3	C702	G7	C1310	N5	C1546	*H5	C1730	*F5	C1914	*F10	C2023	*E11	C2195	*H12	C2379	*E5	C2563	*C5	C2747	*C10	C2931	*E10	C3116	*N5	C3213	*M8	C3310	*N7	C4067	*G8	C4546	*C8	CL1622	H6	CL2242	H10
C324	N3	C703	G9	C1311	N5	C1547	*H5	C1731	*F6	C1915	*F11	C2024	*E11	C2196	*H12	C2380	*E5	C2564	*C5	C2748	*B10	C2932	*E10	C3117	*N5	C3214	*M8	C3311	*N8	C4068	*G8	C4547	*D8	CL1623	*H6	CL2243	H10
C325	N3	C704	C7	C1312	N5	C1548	*H5	C1732	*F6	C1916	*F11	C2100	*H11	C2197	*H12	C2381	*D5	C2565	*C5	C2749	*B10	C2933	*E10	C3118	*N5	C3215	*M8	C3312	*N7	C4069	*G8	C4548	*D8	CL1624	J5	CL2300	D5
C326	M9	C705	C9	C1313	N5	C1549	*H5	C1733	*F5	C1917	*F10	C2101	*H10	C2198	*H12	C2382	*D5	C2566	*C5	C2750	*B10	C2934	*E11	C3119	*N5	C3216	*M8	C3313	*L5	C4070	*G8	C4549	*D8	CL1626	J5	CL2301	D5
C327	*N9	C706	E9	C1314	N4	C1550	*H5	C1734	*F5	C1918	*F10	C2102	*H11	C2199	H12	C2383	E4	C2567	*C5	C2751	*B10	C2935	*E10	C3120	*N5	C3217	*M8	C3314	*L5	C4071	*F7	C4550	*C8	CL1627	J5	CL2302	D5
C328	*M9	C707	E9	C1315	N4	C1551	*H5	C1735	*F5	C1919	*F11	C2103	*H10	C2200	*H12	C2384	E4	C2568	*C5	C2752	*B10	C2936	*E11	C3121	*N5	C3218	*M8	C3315	*L5	C4072	*F7	C4551	*C8	CL1628	J5	CL2303	D5
C329	*M9	C708	E9	C1316	N4	C1552	*H5	C1736	*F5	C1920	*F11	C2104	*H11	C2201	H12	C2385	E3	C2569	*B5	C2753	*B11	C2937	*E11	C3122	*N5	C3219	*M8	C3316	*L5	C4073	*F8	C4552	*C8	CL1629	J5	CL2421	D6
C330	G4	C709	E9	C1401	*P3	C1553	*H5	C1737	*F5	C1921	*F11	C2105	*H11	C2202	G12	C2386	E4	C2570	*B5	C2754	*B11	C2938	*E10	C3123	*N5	C3220	*M8	C3317	*L5	C4074	*F8	C4553	*D7	CL1630	J5	CL2422	E6
C331	D4	C801	*K8	C1402	*P3	C1554	*H5	C1738	*F5	C1922	*F11	C2106	*H11	C2203	H12	C2387	*D4	C2571	*B5	C2755	*B11	C2939	*E11	C3124	*N5	C3221	*M8	C3318	*M6	C4075	*G8	C4554	*D9	CL1631	J5	CL2423	*D6
C332	M3	C802	*K8	C1403	*P3	C1555	*H5	C1739	*F5	C1923	*F11	C2107	*H11	C2204	G12	C2388	*D4	C2572	*B5	C2756	*B10	C2940	*E11	C3125	*N5	C3222	*M8	C3319	*L5	C4076	*G8	C4555	*D7	CL1632	J5	CL2424	E5
C333	*M9	C803	A11	C1404	*P3	C1556	*H5	C1740	*F5	C1924	*F10	C2108	*H10	C2205	*H12	C2389	*D3	C2573	*B5	C2757	*B10	C2941	*E11	C3126	*N5	C3223	*M6	C3320	*M6	C4077	*G8	C4556	*D9	CL1633	J5	CL2426	E5
C334	*G12	C804	*J8	C1405	*P3	C1557	*H6	C1741	*F5	C1925	*F11	C2109	*H10	C2206	*F12	C2390	*D4	C2574	*B5	C2758	*B11	C2942	*E11	C3127	*M5	C3224	*M6	C3321	*M6	C4078	*G8	C4557	*D7	CL1634	J5	CL2427	E5
C335	*G12	C805	*K8	C1406	*P3	C1558	*H5	C1742	*F5	C1926	*F11	C2110	*H11	C2207	*G12	C2391	E4	C2575	*B5	C2759	*B11	C2943	*E11	C3128	*M5	C3225	*M6	C3322	*L7	C4079	*G8	C4558	*D9	CL1635	J5	CL2428	E5
C336	G12	C806	*K8	C1407	*P3	C1559	*H5	C1743	*F5	C1927	*F11	C2111	*H11	C2208	*F12	C2392	E4	C2576	*B5	C2760	*C11	C2944	*E10	C3129	*M5	C3226	*M6	C3323	*L7	C4080	*G8	C4559	*D7	CL1636	J5	CL2429	E5
C337	G12	C807	*K8	C1408	*P2	C1560	*H5	C1744	*F6	C1928	*F11	C2112	*H10	C2221	*H10	C2393	D4	C2577	*B5	C2761	*C11	C2945	*D10	C3130	*M4	C3227	*M6	C3324	*L7	C4081	*H7	C4560	*D7	CL1637	J5	CL2430	E5
C338	*C12	C808	*K8	C1409	*P2	C1561	*H5	C1745	*F5	C1929	*F11	C2113	*H10	C2222	*H10	C2394	D4	C2578	*B5	C2762	*C11	C2946	*D10	C3131	*M5	C3228	*M5	C3325	*L7	C4082	*H7	C4561	*D7	CL1638	H6	CL2431	E5
C339	D12	C809	*K8	C1410	*P2	C1562	*H5	C1746	*F5	C1930	*F11	C2114	*H10	C2223	*G11	C2395	*D4	C2579	*C5	C2763	*B11	C2947	*D10	C3132	*M4	C3229	*L5	C3326	*M8	C4083	*H9	C4562	*C9	CL1639	H6	CL2432	E5
C340	*C12	C810	*K8	C1411	*P2	C1563	*H5	C1747	*F5	C1931	*G10	C2115	*H11	C2224	*G11	C2396	*D4	C2580	*C5	C2764	*B11	C2948	*D10	C3133	*M5	C3230	*M5	C3327	*L7	C4084	*H9	C4563	*C9	CL1640	H6	CL2433	E5
C341	D12	C811	*K8	C1412	*P2	C1564	*H5	C1748	*F5	C1932	*G10	C2116	*H11	C2300	*D5	C2397	*E4	C2581	*C5	C2765	*B11	C2949	*D10	C3134	*M5	C3231	*L5	C3328	*M8	C4085	*H8	C4564	*C9	CL1641	H6	CL2434	E5
C342	G12	C812	*K9	C1413	*P2	C1565	*H5	C1749	*F5	C1933	*G10	C2117	*H10	C2301	*D5	C2398	*E4	C2582	*C5	C2766	*B11	C2950	*D10	C3135	*M5	C3232	*M5	C3329	*L7

CL2621	C6	CL4008	*H8	IC403	*M12	L4001	*H8	R333	F1	R726	*M4	R840	K8	R938	*J8	R1225	B6	R1507	H4	R1724	F4	R2028	F10	R2245	*G11	R2462	*D5	R2712	B12	R2929	*E12	RB909	*R11	RB1916	*F12	RB2713	B12
CL2622	C6	CL4009	G7	IC404	*M12	L4002	*F8	R334	F1	R727	*M4	R841	*K8	R939	J8	R1226	B6	R1508	H4	R1725	F4	R2029	*E11	R2246	*G11	R2463	D5	R2713	C12	R2930	*D12	RB910	*R11	RB2021	G10	RB2714	*C12
CL2623	*B6	CL4501	*D8	IC501	P8	L4003	*H7	R335	A4	R728	M4	R842	*K9	R940	*K8	R1227	B6	R1509	H4	R1726	F4	R2030	*F10	R2247	*G11	R2464	*D5	R2714	*B12	R2931	*D12	RB911	*R11	RB2022	G10	RB2715	C12
CL2624	C5	CL4502	*D8	IC502	R8	L4004	*H9	R336	A4	R729	M4	R843	K9	R941	K8	R1228	B6	R1510	H4	R1727	F4	R2031	*E11	R2248	*G11	R2465	*E5	R2715	*B12	R2932	*D12	RB912	*R12	RB2023	G10	RB2716	*B12
CL2626	C5	CL4503	*D8	IC503	*P8	L4005	*G7	R337	F1	R730	M4	R844	K9	R942	K8	R1229	*M7	R1511	H4	R1728	*F4	R2032	F10	R2249	G10	R2466	D7	R2716	*C12	R2933	*D12	RB913	P11	RB2024	G10	RB2821	C10
CL2627	C5	CL4504	*D8	IC504	*P8	L4006	*G9	R338	F1	R731	M4	R845	*K9	R943	K8	R1230	*M7	R1512	H4	R1729	*F4	R2033	F10	R2250	G10	R2500	C4	R2717	*B12	R3021	*D9	RB914	P11	RB2025	G10	RB2822	C10
CL2628	C5	CL4505	*D8	IC505	R8	L4501	*D8	R339	A4	R732	M4	R846	*K9	R944	*K8	R1231	*M7	R1513	H4	R1730	*F4	R2034	F10	R2251	G10	R2501	C4	R2718	B12	R3022	D9	RB915	P11	RB2026	G11	RB2823	C10
CL2629	C5	CL4506	*D8	IC506	*P9	L4502	*B8	R340	A4	R733	*M4	R847	K9	R945	*K8	R1232	*M7	R1514	*H4	R1731	*F4	R2035	*F10	R2252	*G10	R2502	C4	R2719	B12	R3023	D9	RB916	P12	RB2027	G11	RB2824	C10
CL2630	C5	CL4507	*D8	IC507	P9	L4503	*D7	R401	A7	R734	*M4	R848	K8	R946	*K8	R1233	*M7	R1515	*H4	R1732	*F4	R2036	G10	R2253	G10	R2503	*C5	R2720	*C12	R3024	*D9	RB917	*P11	RB2028	G11	RB2825	C10
CL2631	C5	CL4508	*D8	IC508	P8	L4504	*D9	R402	A7	R735	*M4	R849	*J9	R947	*K8	R1234	J9	R1516	*H4	R1733	*F4	R2037	G10	R2254	G10	R2504	*B5	R2721	*C12	R3025	D9	RB918	*P11	RB2100	G11	RB2826	C11
CL2632	C5	CL4509	C7	IC509	P8	L4505	*D7	R403	*P12	R736	*M4	R850	J9	R948	K8	R1235	J9	R1517	*H4	R1821	*G7	R2038	F10	R2255	G10	R2505	B4	R2722	B12	R3026	D9	RB919	*P11	RB2101	H11	RB2827	C11
CL2633	C5			IC510	P9	L4506	*C9	R404	*P12	R737	*M4	R851	J9	R949	K8	R1236	B6	R1518	H4	R1822	G7	R2039	G10	R2256	G11	R2506	B4	R2723	B12	R3027	*D10	RB920	*P12	RB2102	H11	RB2828	C11
CL2634	C5	CN401	K11	IC511	P8			R405	*P12	R738	M4	R852	*J9	R950	K8	R1237	B6	R1519	H4	R1823	G7	R2040	F10	R2257	G11	R2507	B4	R2724	C12	R3028	D10	RB921	*P11	RB2103	H11	RB2900	D11
CL2635	C5	CN402	N12	IC601	R12	Q201	*R1	R406	*P12	R739	M4	R853	J8	R951	K8	R1238	*H7	R1520	*H4	R1824	*G7	R2041	F10	R2258	*G11	R2508	B4	R2725	C12	R3029	*D11	RB922	*P11	RB2104	*H11	RB2901	D11
CL2636	C5	CN1201	A6	IC602	R9	Q202	*R1	R407	*P12	R740	M4	R854	J9	R952	K8	R1239	*H7	R1521	*H4	R1825	G7	R2042	*G9	R2259	J11	R2509	B4	R2726	C12	R3030	*D10	RB923	*P11	RB2105	*H11	RB2902	D11
CL2637	C5			IC603	P12	Q203	*R1	R408	*M12	R741	M4	R855	*J9	R953	K8	R1240	*F7	R1522	H4	R1826	G7	R2043	*G9	R2260	*J11	R2510	B4	R2727	C12	R3031	*D11	RB1001	R11	RB2106	*H11	RB2903	D11
CL2638	C6	CNT1	R2	IC604	R10	Q204	*R1	R409	*M12	R742	M4	R856	*J9	R954	*J8	R1241	*G7	R1523	H4	R1827	*G6	R2044	F8	R2261	*J11	R2511	B4	R2728	*C12	R3032	D10	RB1002	R11	RB2107	*H11	RB2904	*D11
CL2639	C6	CNW1	R5	IC605	*P9	Q205	*R1	R410	*M11	R743	*M8	R857	*J9	R955	J8	R1242	*G7	R1524	H4	R1828	G6	R2045	*F11	R2262	*J11	R2512	C4	R2729	*C12	R3033	D10	RB1003	R11	RB2108	*H11	RB2905	*D11
CL2640	C6	CNZ1	R12	IC606	*P9	Q301	P6	R411	*M12	R744	*M8	R858	J9	R981	P12	R1243	*G7	R1525	H4	R1829	*G5	R2046	*F11	R2263	J11	R2513	B4	R2730	*B12	R3034	E10	RB1004	R11	RB2109	J11	RB2906	*D11
CL2641	C6			IC607	*P10	Q302	M3	R412	*M13	R745	*M8	R859	J9	R982	P12	R1244	*M8	R1526	H4	R1830	*G6	R2047	*F11	R2264	*J11	R2514	*C4	R2731	*B12	R3035	*E10	RB1005	*R11	RB2110	J11	RB2907	*D11
CL2642	C6	D201	*R1	IC608	P9	Q303	N9	R413	*P12	R746	*M8	R860	*J9	R983	P12	R1245	*M8	R1527	H4	R1831	*G5	R2048	*F11	R2265	*G11	R2515	*C4	R2732	*B12	R3036	E10	RB1006	*R11	RB2111	H11	RB2908	*E11
CL2643	C6	D202	R1	IC609	P10	Q304	D1	R414	*P12	R747	*M7	R861	J9	R984	P12	R1246	*D7	R1528	*H4	R1832	F6	R2049	F10	R2266	*G9	R2516	*B4	R2733	*B12	R3037	E10	RB1007	*R11	RB2112	H11	RB2909	E11
CL2700	C11	D203	A3	IC610	P9	Q305	*A5	R415	*P12	R748	*M7	R862	J9	R985	P12	R1247	*D7	R1529	*H4	R1833	F6	R2050	E10	R2300	E4	R2517	*C4	R2821	*C9	R3038	E10	RB1008	*R11	RB2113	H12	RB2910	E11
CL2701	C11	D301	A5	IC611	P9	Q306	D1	R416	*P12	R749	*M7	R863	J8	R986	J11	R1248	*C7	R1530	*H4	R1834	F6	R2051	E10	R2301	D4	R2518	C4	R2822	C8	R3039	E10	RB1009	*R11	RB2114	*H12	RB2911	E11
CL2702	C11	D302	A5	IC612	P10	Q307	*A5	R417	*P12	R750	*M7	R864	J8	R987	J11	R1249	*C7	R1531	*H4	R1835	*F6	R2052	*F10	R2302	D4	R2519	C4	R2823	C8	R3040	D10	RB1010	*R11	RB2115	H12	RB2912	E11
CL2703	C11	D303	A4	IC613	P9	Q308	F1	R501	*R8	R751	*M7	R865	K8	R988	J11	R1250	*C7	R1532	*H4	R1836	F6	R2053	E10	R2303	*E5	R2520	*B4	R2824	*C9	R3041	D10	RB1011	*R11	RB2116	*H12	RB2913	D12
CL2821	B10	D304	A4	IC701	R13	Q309	*A4	R502	*R8	R752	M7	R866	*K9	R989	J11	R1251	*C7	R1533	*H4	R1837	F6	R2054	E10	R2304	*D5	R2521	*B4	R2825	C8	R3042	D9	RB1012	*R11	RB2221	J10	RB2914	*E12
CL2822	B10	D401	A7	IC702	E9	Q310	F1	R503	*R8	R753	M7	R867	*K9	R990	P12	R1252	*H9	R1621	G7	R1838	F6	R2055	E10	R2305	D4	R2522	C4	R2826	C8	R3043	D9	RB1013	*P11	RB2222	J10	RB2915	E12
CL2823	*C10	D402	A7	IC703	E9	Q311	*A4	R504	*R8	R754	M7	R868	K9	R991	P12	R1253	*D9	R1622	G7	R1839	F5	R2056	E11	R2306	D4	R2523	C4	R2827	*B10	R3044	C9	RB1014	*P11	RB2223	J10	RB2916	*D12
CL2824	B10	D801	A11	IC801	A11	Q501	*P8	R505	*R8	R755	M7	R869	*J8	R992	P12	R1254	A6	R1623	G7	R1840	G6	R2057	E11	R2307	D4	R2524	B4	R2828	B10	R3045	*D11	RB1015	*P11	RB2224	H10	RB3021	E10
CL2826	B11	D802	A11	IC901	R11	Q502	*P8	R506	*R8	R756	M7	R870	*J8	R993	P12	R1301	H8	R1624	G7	R1841	G6	R2058	*E11	R2308	D4	R2525	B4	R2829	*B11	R3046	*D11	RB1016	*P11	RB2225	H10	RB3022	E10
CL2827	B11			IC902	P11	Q503	*P9	R507	*R8	R757	*M7	R871	J8	R994	P12	R1302	D8	R1625	H7	R1842	*G7	R2059	G11	R2309	D4	R2526	B4	R2830	*B10	R3047	*D11	RB1500	H4	RB2226	J11	RB3023	E10
CL2828	B11	DD201	E2	IC903	P12	Q601	*P9	R508	*R9	R758	*M7	R872	J8	R995	P12	R1401	L8	R1626	H7	R1843	*G7	R2060	*G11	R2310	D4	R2527	B4	R2831	*B11	R3048	*D11	RB1501	H4	RB2227	J11	RB3024	E10
CL2829	B10	DD202	K2	IC904	J11	Q602	*P9	R509	*P8	R759	*M7	R873	*J8	R996	P12	R1402	L8	R1627	*H6	R1844	G7	R2061	*G11	R2311	D4	R2528	*B4	R2832	C10	R3049	D10	RB1502	H4	RB2228	J11	RB3025	E10
CL2830	B11	DD203	C2	IC1001	R11	Q603	*P10	R510	*R8	R760	*M7	R874	*K9	R997	P12	R1403	P3	R1628	H6	R1845	*G5	R2062	*G11	R2312	E4	R2529	*B4	R2833	C10	R3050	D10	RB1503	H4	RB2300	E4	RB3026	E11
CL2831	B10	DD204	H2	IC1002	P13			R511	R9	R761	*M7	R875	K9	R998	J11	R1404	P3	R1629	*J5	R1846	*G5	R2063	G11	R2313	D4	R2530	*C4	R2834	C10	R3051	D10	RB1504	*H5	RB2301	E4	RB3027	E11
CL2832	B11			IC1003	P13	R201	A3	R512	*R9	R762	M7	R876	K9	R999	J11	R1405	P3	R1630	*H6	R1847	*G5	R2064	*G11	R2314	*E4	R2531	*C4	R2835	*C10	R3052	*D10	RB1505	*H5	RB2302	E4	RB3028	E11
CL2833	B11	E1	P11	IC1004	P11	R202	A3	R513	*R9	R763	M7	R877	*K9	R1000	J11	R1406	P3	R1631	*J5	R1848	*G5	R2065	*E11	R2315	*E4	R2532	*C4	R2836	C10	R3053	D10	RB1506	*H5	RB2303	D4	RB3501	*M6
CL2834	B11	E2	P7	IC1005	*P13	R203	A3	R514	P8	R764	M7	R878	*K9	R1001	J11	R1407	P3	R1632	H6	R1849	G6	R2066	F8	R2316	*D4	R2533	*C4	R2837	C10	R3054	D10	RB1507	*H5	RB2304	*D5	RB3502	*M8
CL2835	B11	E3	N1	IC1202	A6	R204	*R1	R515	P8	R765	M7	R879	K9	R1002	J11	R1408	P3	R1633	H6	R1850	G6	R2100	H11	R2317	*E4	R2621	*C7	R2838	C10	R3055	D10	RB1508	*G5	RB2305	*D5		
CL2836	B11	E4	G13	IC1203	A6	R205	*R1	R516	P8	R766	M7	R880	*J9	R1003	J11	R1409	P2	R1634	H6	R1851	G6	R2101	H11	R2318	E4	R2622	C7	R2839	C10	R3056	D11	RB1509	G5	RB2306	*E5	TP201	A3
CL2837	B11	E5	N2	IC1401	*P3	R206	*P1	R517	P9	R767	G7	R881	J9	R1004	J11	R1410	P2	R1635	*H6	R1852	*G6	R2102	H11	R2319	E4	R2623	C7	R2840	B10	R3057	D11	RB1510	G5	RB2307	*E5	TP202	A5
CL2838	B10	E6	G3	IC1402	*P2	R207	*P1	R518	*P8	R768	G9	R882	J9	R1005	J11	R1411	P2	R1636	G6	R1853	G5	R2103	*H11	R2320	*D4	R2624	*C7	R2841	B10	R3058	*D11	RB1511	H4	RB2308	*D5	TP203	A4
CL2839	C10	E7	C3	IC1501	H4	R208	*E2	R601	R12	R769	C7	R883	*J9	R1006	*P11	R1412	P2	R1637	G6	R1854	G6	R2104	*H11	R2321	*D4	R2625	C7	R2842	*C9	R3059	E11	RB1512	H4	RB2309	D5	TP204	A4
CL2840	C10	E8	D13	IC1502	*H4	R209	*K2	R602	R12	R770	C9	R884	J8	R1007	*P12	R1413	P2	R1638	H6	R1855	G6	R2105	H11	R2322	E4	R2626	C7	R2843	*C9	R3060	*E11	RB1513	H4	RB2310	D5	TP205	A3
CL2841	C10	E9	L3	IC1701	F4	R210	*C2	R603	*R12	R771	E9	R885	J9	R1008	*P12	R1414	P2	R1639	G5	R1856	G5	R2106	H11	R2323	E4	R2627	*C6	R2844	C8	R3061	*E11	RB1514	*H4	RB2311	D4	TP301	P6
CL2842	B10	E10	J10	IC1702	*F4	R211	*G2	R604	*R12	R772	*L9	R886	*J9	R1009	*P12	R1415	P3	R1640	H6	R1857	G5	R2107	H11	R2324	D4	R2628	C6	R2845	*B11	R3062	*E11	RB1515	H4	RB2312	D4	TP302	N3
CL2843	B10	E11	*P12	IC1901	F12	R212	*E2	R605	*R9	R773	*L9	R887	*J9	R1051	P11	R1416	P3	R1641	H6	R1858	*G5	R2108	H11	R2325	D4	R2629	*C5	R2846	*B11	R3063	E11	RB1516	*H4	RB2313	E4	TP303	M9
CL2900	E11	E12	*P7	IC1902	*F12	R213	*E2	R606	*R9	R774	*F8	R888	K8	R1052	P11	R1417	P3	R1642	*G7	R1859	F5	R2109	H11	R2326	D4	R2630	*C6	R2847	*B11	R3064	*E11	RB1621	G5	RB2314	*D4	TP601	P12
CL2901	E11	E13	*N1	IC2101	H12	R214	*E2	R607	P12	R775	E9	R889	*K9	R1053	P11	R1418	P3	R1643	*G7	R1860	*F5	R2110	H12	R2327	D4	R2631	*C5	R2848	*B11	R3065	*D11	RB1622	G6	RB2315	D4	TP701	P12
CL2902	E11	E14	*G13	IC2102	*H12	R215	*K2	R608	*R9	R776	H8	R890	*J8	R1054	P11	R1419	P3	R1644	G7	R1861	*F5	R2111	H12	R2328	*D4	R2632	B6	R2849	B10	R3066	*C9	RB1623	G6	RB2316	*E4	TP702	R12
CL2903	E11	E15	*N2	IC2301	D4	R216	*K2	R609	*R10	R777	*F8	R891	J8	R1055	P11	R1420	P3	R1645	*J5	R1862	*F5	R2112	H12	R2329	*D4	R2633	B6	R2850	B10	R3101	*M5	RB1624	G6	RB2421	D5	TP703	R12
CL3021	D10	E16	*G3	IC2302	*D4	R217	*K2	R610	*R10	R778	H8	R892	K9	R1056	P11	R1421	P2	R1646	*J5	R1863	F5	R2113	H12	R2330	*E4	R2634	B6	R2851	B10	R3102	*M5	RB1625	H6	RB2422	D6	TP704	R12
CL3022	D10	E17	*C3	IC2501	C4	R218	*K2	R611	P12	R779	*C8	R893	K8	R1057	P11	R1422	P2	R1647	*J5	R1864	*F5	R2114	*H12	R2331	*E4	R2635	*B6	R2852	*B10	R3103	*M5	RB1626	G5	RB2423	D6	TP705	M3
CL3023	*E10	E18	*D13	IC2502	*B4	R219	*C2	R612	*P12	R780	E9	R894	*K8	R1058	P11	R1423	P2	R1648	*J5	R1865	*G5	R2115	*H12	R2332	*E4	R2636	B6	R2853	B10	R3104	*M5	RB1627	G5	RB2424	D6	TP706	L3
CL3024	D10	E19	*K5	IC2701	C12	R220	*C2	R613	*P12	R781	D8	R895	*J9	R1059	P11	R1424	P2	R1649	H6	R1866	G7	R2116	*H12	R2333	*E4	R2637	B6	R2854	B10	R3113	*M7	RB1628	G5	RB2425	D6	TP707	M3
CL3026	D11	E20	*J10	IC2702	*C12	R221	*C2	R614	*P12	R782	*C8	R896	J9	R1060	P11	R1425	P2	R1650	H6	R1900	F11	R2117	*H12	R2421	D7	R2638	B6	R2855	B10	R3114	*M8	RB1700	G4	RB2426	D5	TP708	L3
CL3027	D11	E21	A5	IC2901	D12	R222	*G2	R615	*P12	R783	D8	R897	J9	R1061	P11	R1426	P2	R1651	J6	R1901	F11	R2118	H12	R2422	D7	R2639	B5	R2856	B11	R3115	*M8	RB1701	G4	RB2427	D5	TP709	P8
CL3028	D11			IC2902	*D12	R223	*G2	R616	*P12	R801	*K8	R898	*J9	R1062	P11	R1427	*R3	R1652	*J6	R1902	F11	R2119	H12	R2423	D7	R2640	C6	R2857	B11	R3116	*M8	RB1702	F4	RB2428	D5	TP710	P7
CL3029	D10	F201	R1	IC3501	L5	R224	*G2	R617	*R9	R802	*K8	R899	J9	R1063	P11	R1428	*R3	R1653	J5	R1903	*F11	R2120	*H12	R2424	D7	R2641	C6	R2858	*B11	R3501	M6	RB1703	F4	RB2500	C4	TP711	P7
CL3030	D11	F202	E1	IC3502	L8	R225	A5	R618	*R10	R803	*K8	R900	J9	R1064	P11	R1429	*R3	R1654	J6	R1904	*G11	R2121	*H12	R2425	D7	R2642	*C7	R2859	C11	R3502	M6	RB1704	*F5	RB2501	C4	TP712	P7
CL3031	D10	F203	J1	IC4001	F7	R226	A4	R619	*R10	R804	K9	R901	A11	R1065	P11	R1430	*R3	R1655	J6	R1905	G11	R2122	H12	R2426	D7	R2643	*C7	R2860	*C11	R3503	M6	RB1705	*F5	RB2502	C4	TP3501	P6
CL3032	D11	F204	B1	IC4501	B7	R227	A4	R620	*R10	R805	*K8	R902	A11	R1066	P11	R1431	*R3	R1656	J5	R1906	F11	R2123	H12	R2427	*E6	R2644	C7	R2861	*C11	R3504	M6	RB1706	*F5	RB2503	C4	TP3502	P6
CL3033	D11	F205	G1			R228	A3	R621	*R10	R806	*K8	R903	J8	R1067	*P13	R1432	*R3	R1657	J5	R1907	F11	R2124	H12	R2428	E6	R2645	*C5	R2862	*C11	R3505	*M6	RB1707	*G5	RB2504	*B5	TP3503	P6
CL3034	D11			L201	P1	R229	*E2	R622	*R10	R807	*K8	R904	J8	R1068	*P13	R1433	*R3	R1658	*J5	R1908	F11	R2125	H12	R2429	*E5	R2646	*C5	R2863	C11	R3506	*N6	RB1708	*F5	RB2505	*C5	TP3504	P7
CL3035	D11	FB701	E9	L501	R8	R301	M3	R623	*P9	R808	K8	R906	*J8	R1101	*M5	R1434	*R2	R1659	G5	R1909	F11	R2126	H12	R2430	*E6	R2647	*C5	R2864	*C11	R3507	*M6	RB1709	F5	RB2506	*C5	TP3505	J10
CL3036	D11	FB3101	*N8	L601	R9	R302	M3	R624	R10	R809	K8	R907	*K8	R1102	M4	R1435	*R2	R1660	*G5	R1910	F12	R2127	H12	R2431	*E5	R2648	*C5	R2865	*B11	R3508	*N6	RB1710	F5	RB2507	*C5	TP3506	J10
CL3037	D11	FB3102	*N5	L1500	*H5	R303	M3	R625	P9	R810	J8	R908	*K8	R1103	*M7	R1436	*R2	R1661	*G5	R1911	F12	R2128	*H12	R2432	D6	R2649	C6	R2866	C8	R3509	M8	RB1711	F4	RB2508	*B5	TP3507	J10
CL3038	D10	FB3103	*R6	L1501	*H5	R304	N9	R626	P9	R811	J8	R909	*K8	R1104	M7	R1437	*R2	R1662	*G5	R1912	F12	R2129	*H12	R2433	D6	R2650	C6	R2900	D11	R3510	M8	RB1712	F4	RB2509	B5	TP3508	J10
CL3039	D10	FB3104	*M3	L1700	*F5	R305	N9	R627	P9	R812	*J8	R910	J8	R1105	*H8	R1438	*R2	R1663	G5	R1913	F12	R2130	*H12	R2434	D6	R2651	C6	R2901	D11	R3511	M8	RB1713	G4	RB2510	B5		
CL3040	D10	FB3105	*N10	L1701	*F5	R306	N9	R628	P10	R813	*J8	R911	K8	R1106	*H8	R1439	*R2	R1664	*G5	R1914	*F12	R2131	*H12	R2435	*D6	R2652	*C6	R2902	D11	R3512	M8	RB1714	*F4	RB2511	B4	X501	P8
CL3041	D10			L1900	*F11	R307	P6	R629	*P10	R814	J8	R912	K8	R1107	*D8	R1440	*R2	R1665	*J5	R1915	*F12	R2132	*H12	R2436	D6	R2653	C5	R2903	*D11	R3513	M8	RB1715	F4	RB2512	B4	X502	P8
CL3042	D10	IC1	K9	L1901	*F11	R308	N3	R701	M6	R815	J8	R913	K8	R1108	*D8	R1441	*R2	R1666	H7	R1916	*G12	R2133	*H12	R2437	D6	R2654	C6	R2904	*E11	R3514	*M8	RB1716	*F4	RB2513	C4	X503	P8
CL3043	D10	IC2	M5	L2100	*H11	R309	M9	R702	M8	R816	*J8	R914	K8	R1201	A6	R1442	*R2	R1700	F4	R1917	*F12	R2221	*G9	R2438	D6	R2655	C6	R2905	E11	R3515	*M8	RB1821	F5	RB2514	*B4	X601	P9
CL3501	*M6	IC3	M8	L2101	*H11	R310	P6	R703	R13	R817	*J8	R915	K8	R1202	A6	R1443	*R3	R1701	F4	R1918	F12	R2222	G9	R2439	D5	R2656	C5	R2906	D11	R3516	*M8	RB1822	F6	RB2515	B4	X602	P9
CL3502	*M6	IC4	G8	L2300	*D5	R311	M3	R704	R12	R818	*J8	R916	K8	R1203	A6	R1444	*R3	R1702	F4	R1919	F12	R2223	G9	R2440	E6	R2657	C5	R2907	D11	R3517	*M8	RB1823	F6	RB2516	*C4	X603	P9
CL3503	*M6	IC5	C8	L2301	*D5	R312	N9	R705	R13	R819	*J8	R917	K8	R1204	A6	R1445	*R3	R1703	*F5	R1920	*G12	R2224	*G9	R2441	E6	R2658	*C5	R2908	E11	R4001	*F7	RB1824	F6	RB2621	B5	X701	E9
CL3504	*M6	IC11	H5	L2500	*C5	R313	F1	R706	R12	R820	*J8	R918	*K8	R1205	A6	R1446	*R3	R1704	*F5	R1921	*G12	R2225	G9	R2442	*D7	R2659	B5	R2909	E11	R4002	*F7	RB1825	F6	RB2622	B6		
CL3505	*M6	IC12	F5	L2501	*C5	R314	F1	R707	*M5	R821	J8	R919	*K8	R1206	A6	R1447	*R3	R1705	F4	R1922	F12	R2226	G9	R2443	*D7	R2660	*B5	R2910	E12	R4003	*H8	RB1826	F5	RB2623	B6		
CL3506	*M6	IC13	F11	L2700	*B11	R315	D1	R708	*M5	R822	J8	R920	*K8	R1207	A6	R1448	*R3	R1706	F4	R1923	F12	R2227	*H10	R2444	D7	R2661	*B5	R2911	E12	R4004	*H8	RB1827	F5	RB2624	B6		
CL3507	*M6	IC14	H11	L2701	*B11	R316	F1	R709	*M7	R823	*J8	R921	*K8	R1208	*M5	R1449	*R3	R1707	F4	R1924	F12	R2228	H10	R2445	*E5	R2662	*B5	R2912	D12	R4005	*H8	RB1828	F5	RB2625	B6		
CL3508	*M6	IC15	D5	L2900	*D11	R317	D1	R710	*M7	R824	*J8	R922	J9	R1209	*M5	R1450	*R2	R1708	F4	R1925	F12	R2229	*G11	R2446	*E5	R2663	B5	R2913	E12	R4006	*H8	RB1900	F11	RB2626	B5		
CL3509	*M8	IC16	C5	L2901	*D11	R318	D1	R711	R13	R825	*K8	R923	*J9	R1210	*M5	R1451	*R2	R1709	F4	R1926	F12	R2230	*H10	R2447	*E5	R2664	*B5	R2914	*D12	R4501	*B7	RB1901	F11	RB2627	B5		
CL3510	*M8	IC17	C11	L3101	*N5	R319	D1	R712	R12	R826	*J9	R924	K8	R1211	*M5	R1452	*R2	R1710	F4	R1927	F12	R2231	*G11	R2448	*E5	R2665	*C5	R2915	*D12	R4502	*B7	RB1902	F11	RB2628	B5		
CL3511	*M8	IC18	D11	L3102	*N5	R320	D1	R713	R13	R827	*J8	R925	*K8	R1212	*A6	R1453	*R2	R1711	F4	R1928	*G12	R2232	H10	R2449	E6	R2666	C7	R2916	*E12	R4503	*D8	RB1903	F11	RB2700	B11		
CL3512	*M8	IC201	*P1	L3103	*N5	R321	D1	R714	R12	R828	K8	R926	K8	R1213	B6	R1454	*R2	R1712	G4	R1929	*G12	R2233	H10	R2450	E6	R2700	B11	R2917	*D12	R4504	*D8	RB1904	*F11	RB2701	B11		
CL3513	*M8	IC301	P6	L3104	*N5	R322	A5	R715	*M6	R829	*K9	R927	J9	R1214	B6	R1455	*R2	R1713	F4	R1930	*F12	R2234	H10	R2451	E6	R2701	C11	R2918	D12	R4505	*D8	RB1905	*F11	RB2702	B11		
CL3514	*M8	IC302	N3	L3105	*N8	R323	A5	R716	*M6	R830	*K9	R928	*J9	R1215	B6	R1456	*R2	R1714	*F4	R1931	*F12	R2235	*H10	R2452	*E6	R2702	C11	R2919	D12	R4506	*D8	RB1906	*F11	RB2703	B11		
CL3515	*M8	IC303	N9	L3106	*N7	R324	D1	R717	*M6	R831	K9	R929	J9	R1216	B6	R1457	*R2	R1715	*F4	R1932	*F12	R2236	J10	R2453	E5	R2703	*B11	R2920	*E12			RB1907	*F11	RB2704	*C11		
CL3

Components locations list; previous page

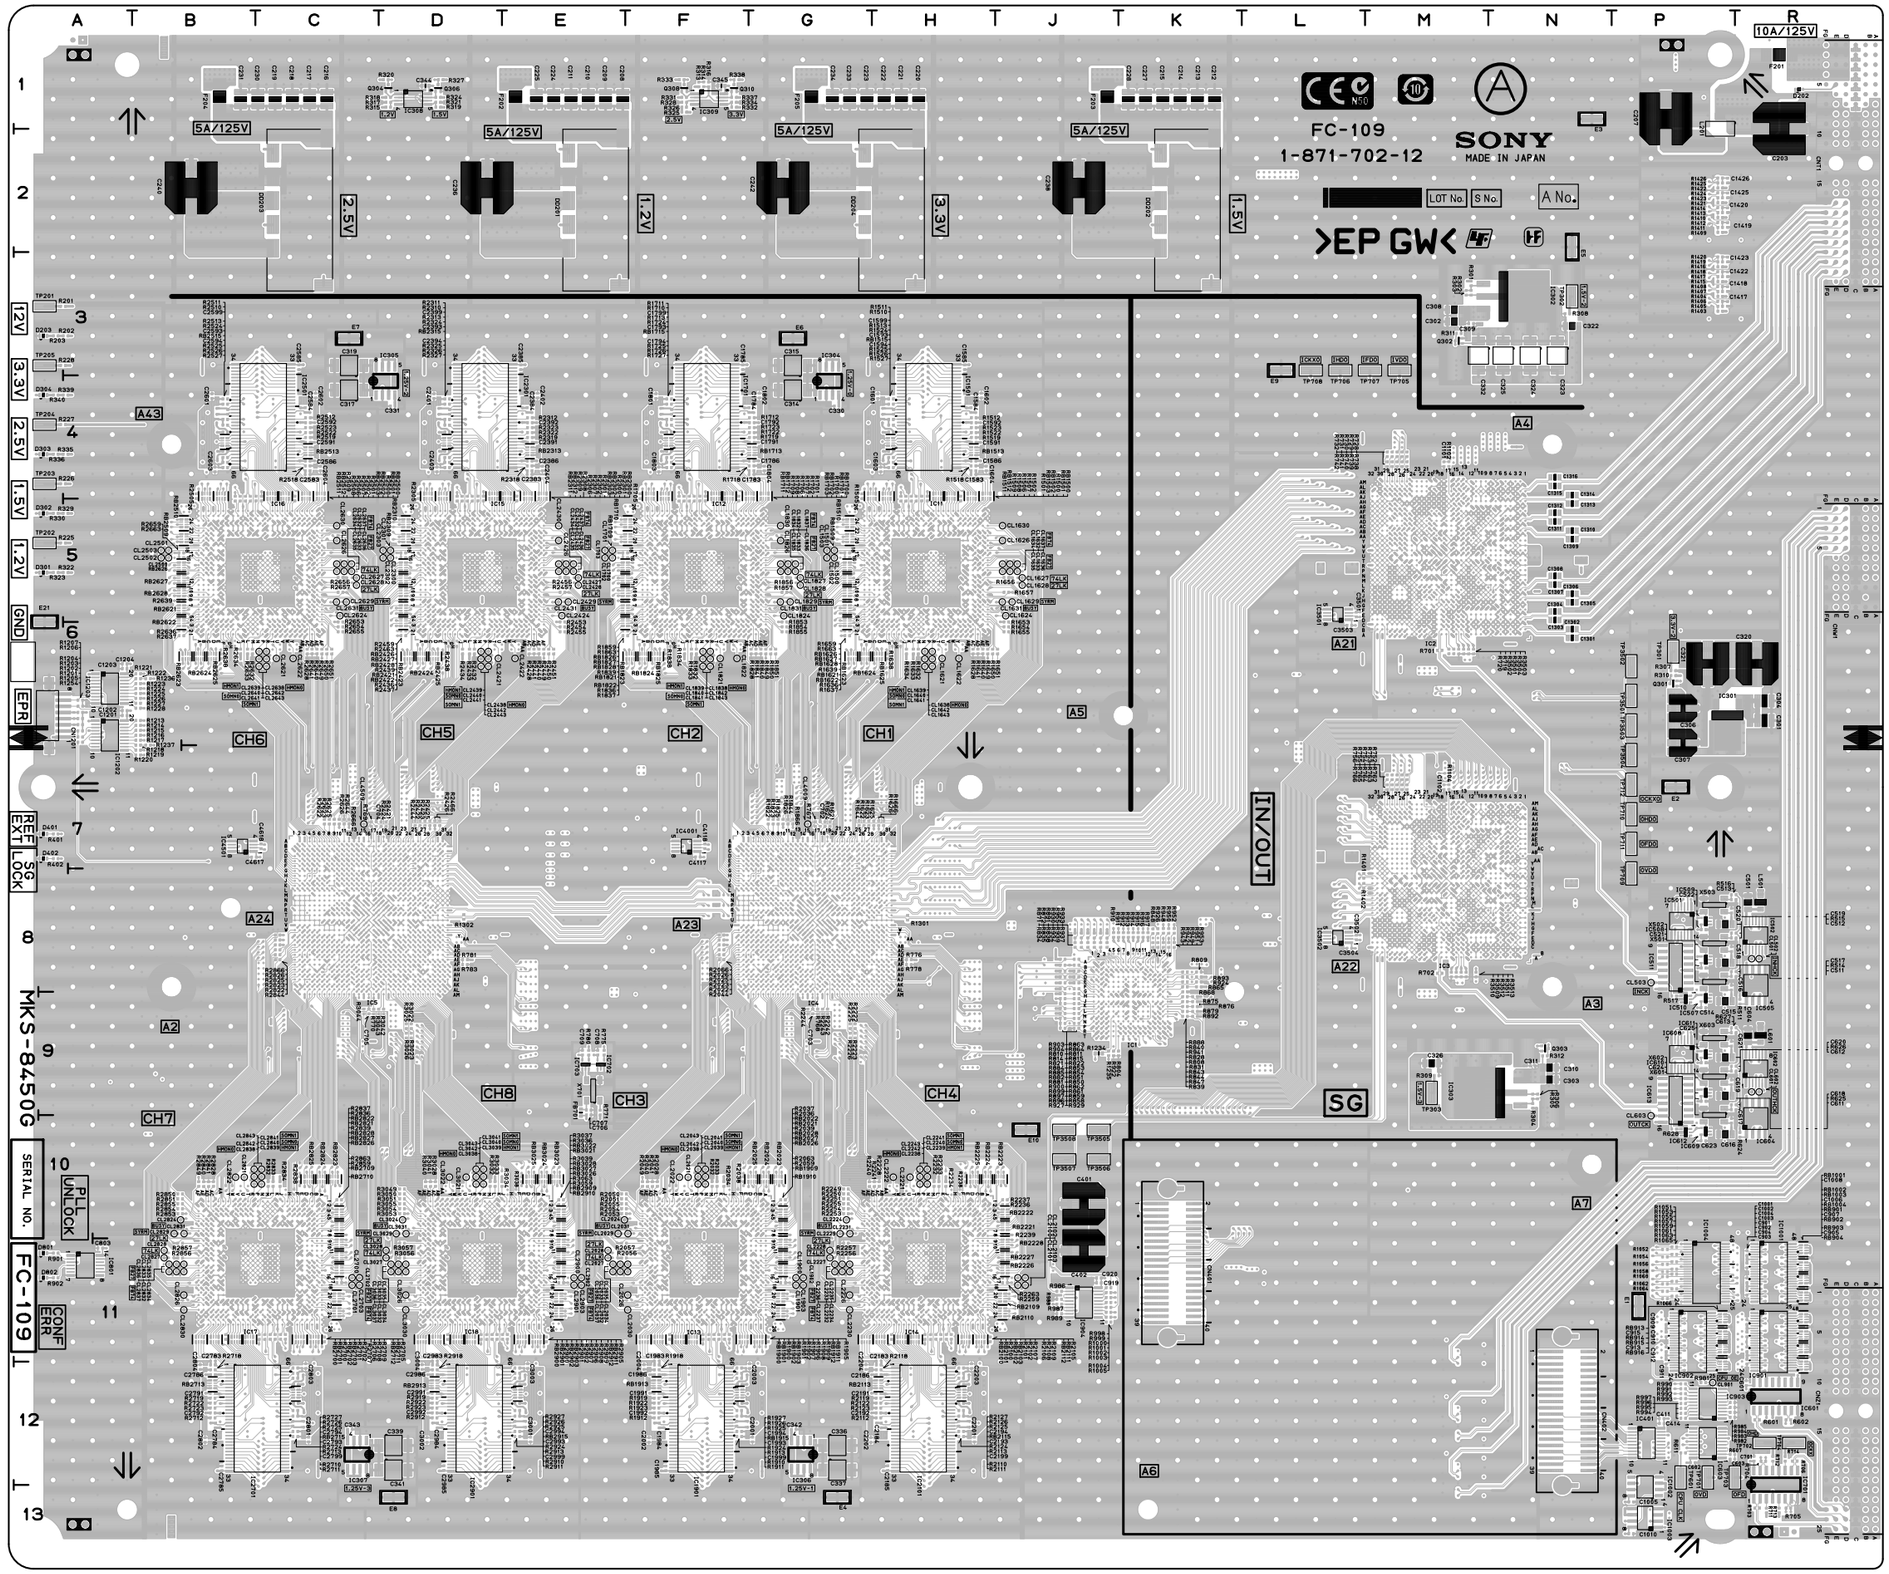


FC-109 -A SIDE-
SUFFIX: -12

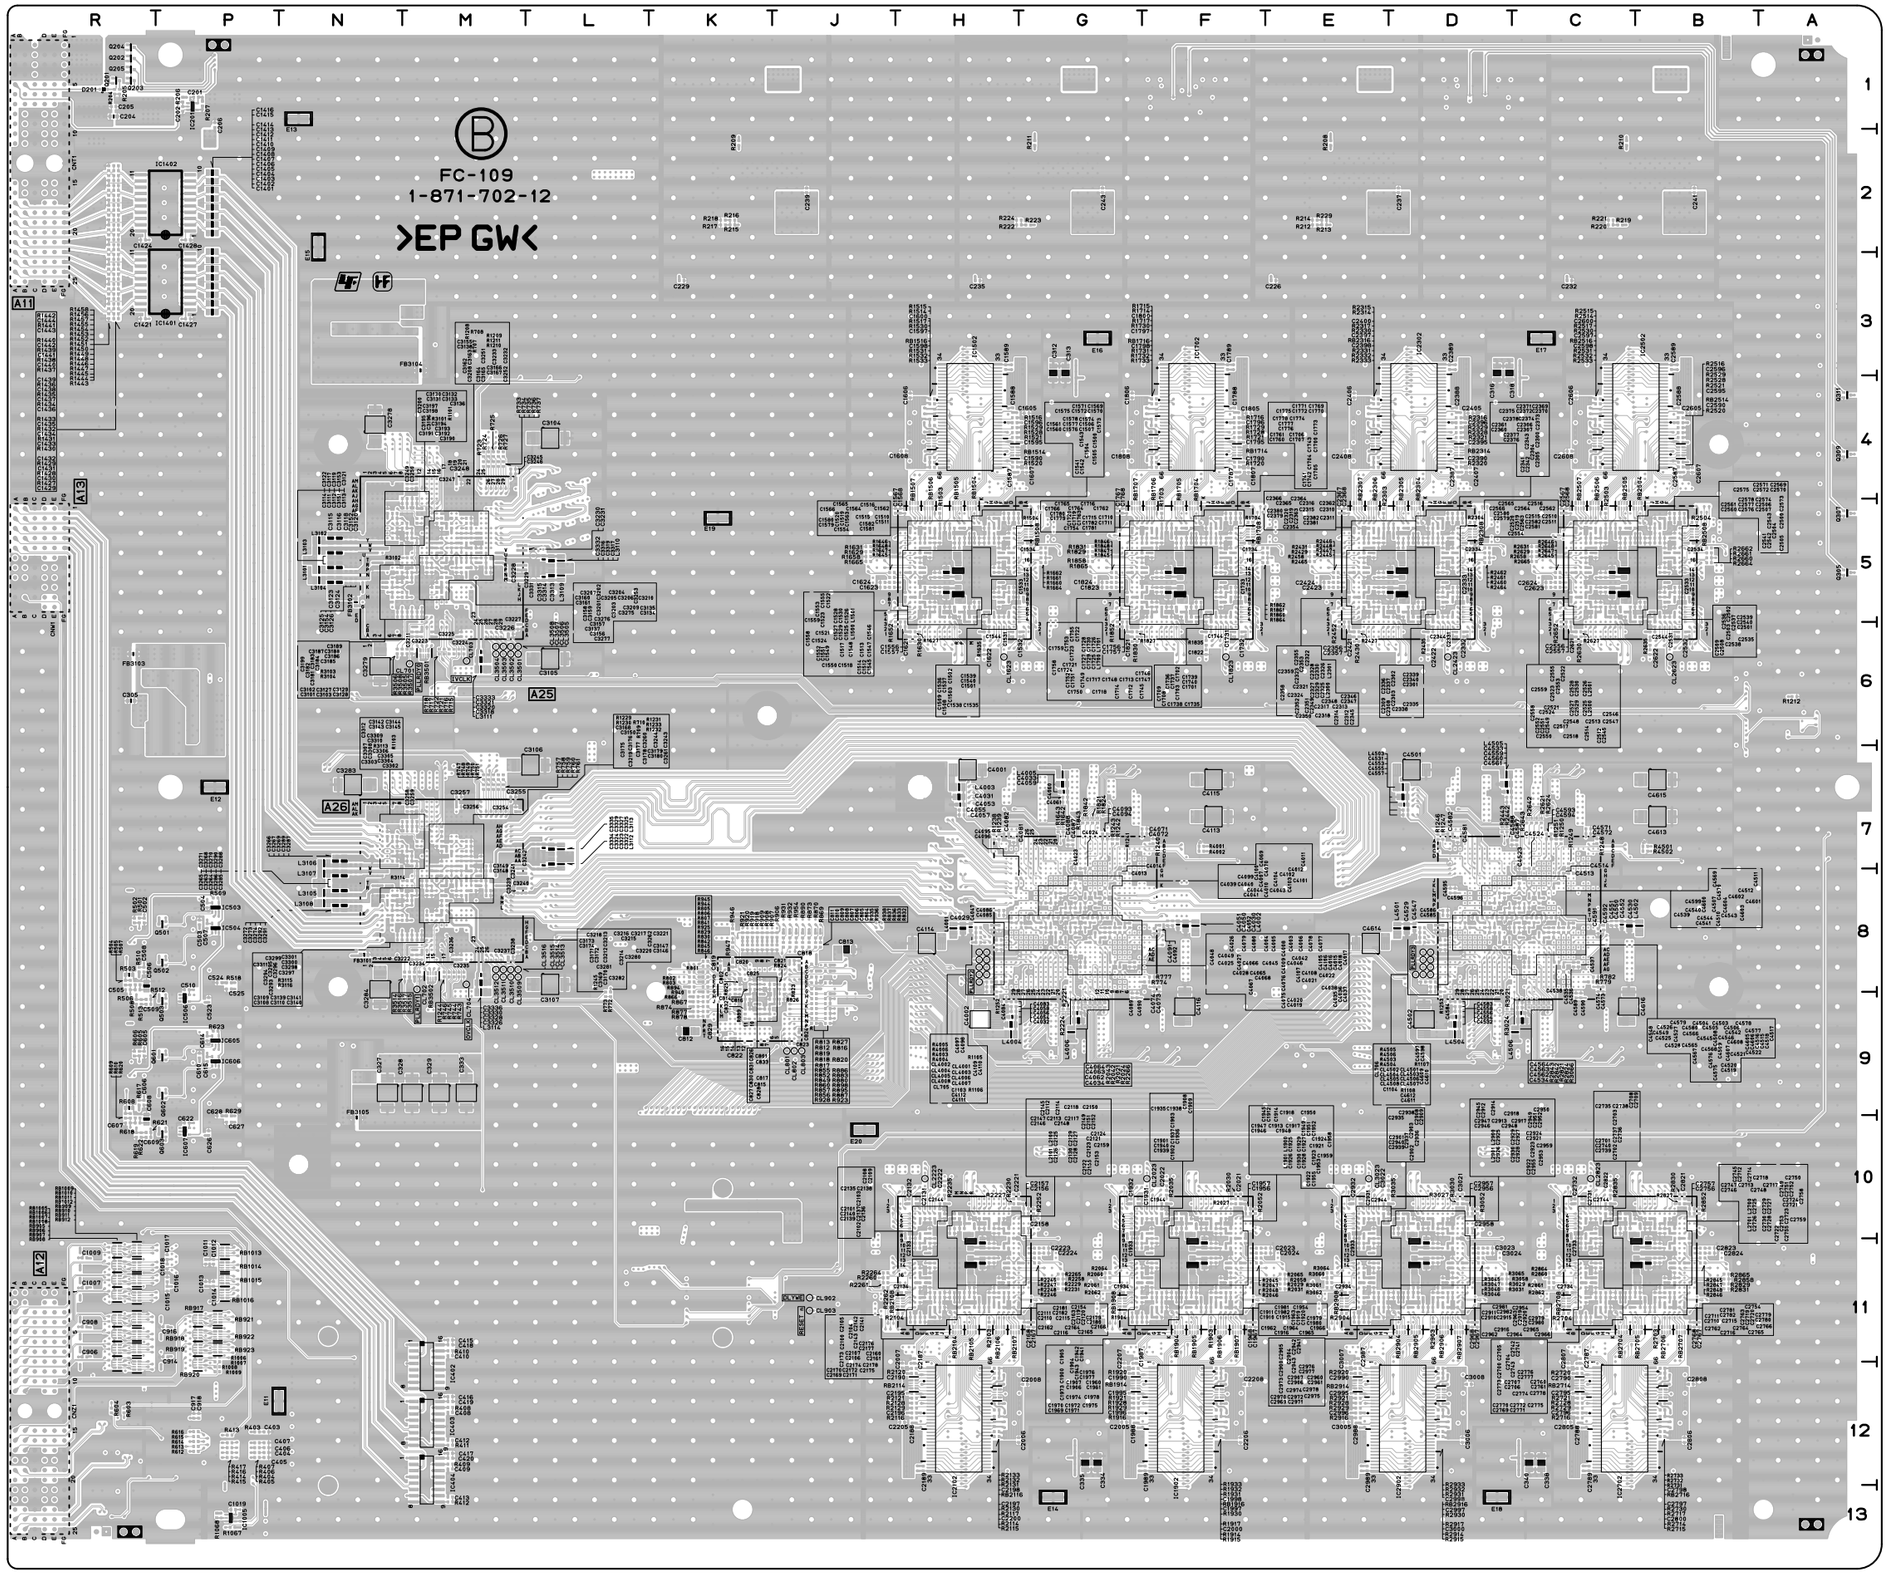

FC-109 -B SIDE-
SUFFIX: -12


HN-305, IF-937

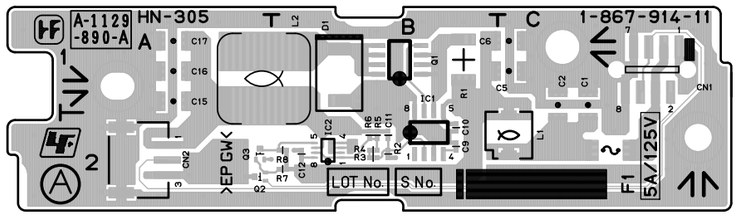


HN-305 -A SIDE-
SUFFIX: -11

HN-305 (1-867-914-11)

C1	C1	IC1	B2
C2	C1	IC2	B2
C5	C1		
C6	C1	L1	C2
C9	B2	L2	A1
C10	B2		
C11	B2	Q1	B1
C12	B2	Q2	A2
C15	A1	Q3	A2
C16	A1		
C17	A1	R1	B1
		R2	B2
CN1	C1	R3	B2
CN2	A2	R4	B2
		R5	B2
D1	B1	R6	B2
		R7	B2
F1	C2	R8	B2

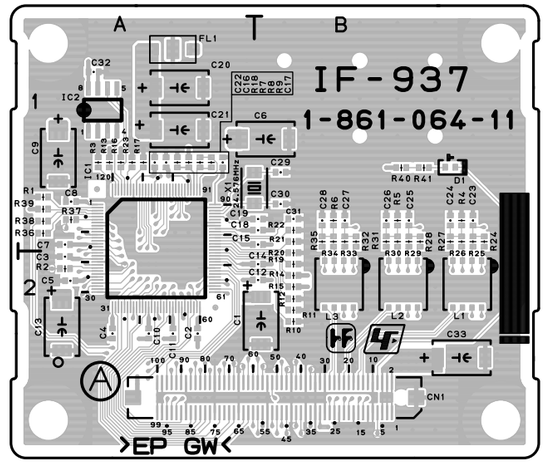

IF-937 -A SIDE-
SUFFIX: -11

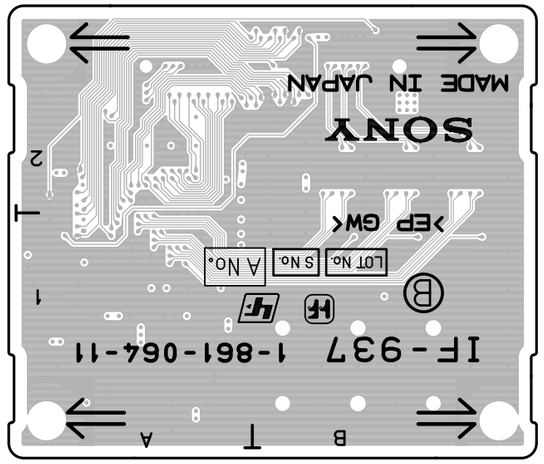


IF-937 -B SIDE-
SUFFIX: -11

IF-937 (1-861-064-11)

C1	B2	C24	B1	R1	A1	R24	B1
C2	A2	C25	B1	R2	A2	R25	B1
C3	A2	C26	B1	R3	A1	R26	B1
C4	A2	C27	B1	R4	B1	R27	B1
C5	A2	C28	B1	R5	B1	R28	B1
C6	B1	C29	B1	R6	B1	R29	B1
C7	A1	C30	B1	R7	A1	R30	B1
C8	A1	C31	B1	R8	A1	R31	B1
C9	A1	C32	A1	R9	A1	R32	B1
C10	A2	C33	B2	R10	B2	R33	B1
C11	A2			R11	B2	R34	B1
C12	B2	CN1	B2	R12	B2	R35	B1
C13	A2			R13	A1	R36	A1
C14	B2	D1	B1	R14	B2	R37	A1
C15	B1			R15	B2	R38	A1
C16	A1	FL1	A1	R16	A1	R39	A1
C17	A1			R17	A1	R40	B1
C18	B1	IC1	A1	R18	A1	R41	B1
C19	B1	IC2	A1	R19	B2		
C20	A1			R20	B2	X1	A1
C21	A1	L1	B2	R21	B1		
C22	A1	L2	B2	R22	B1		
C23	B1	L3	B2	R23	A1		


5-31

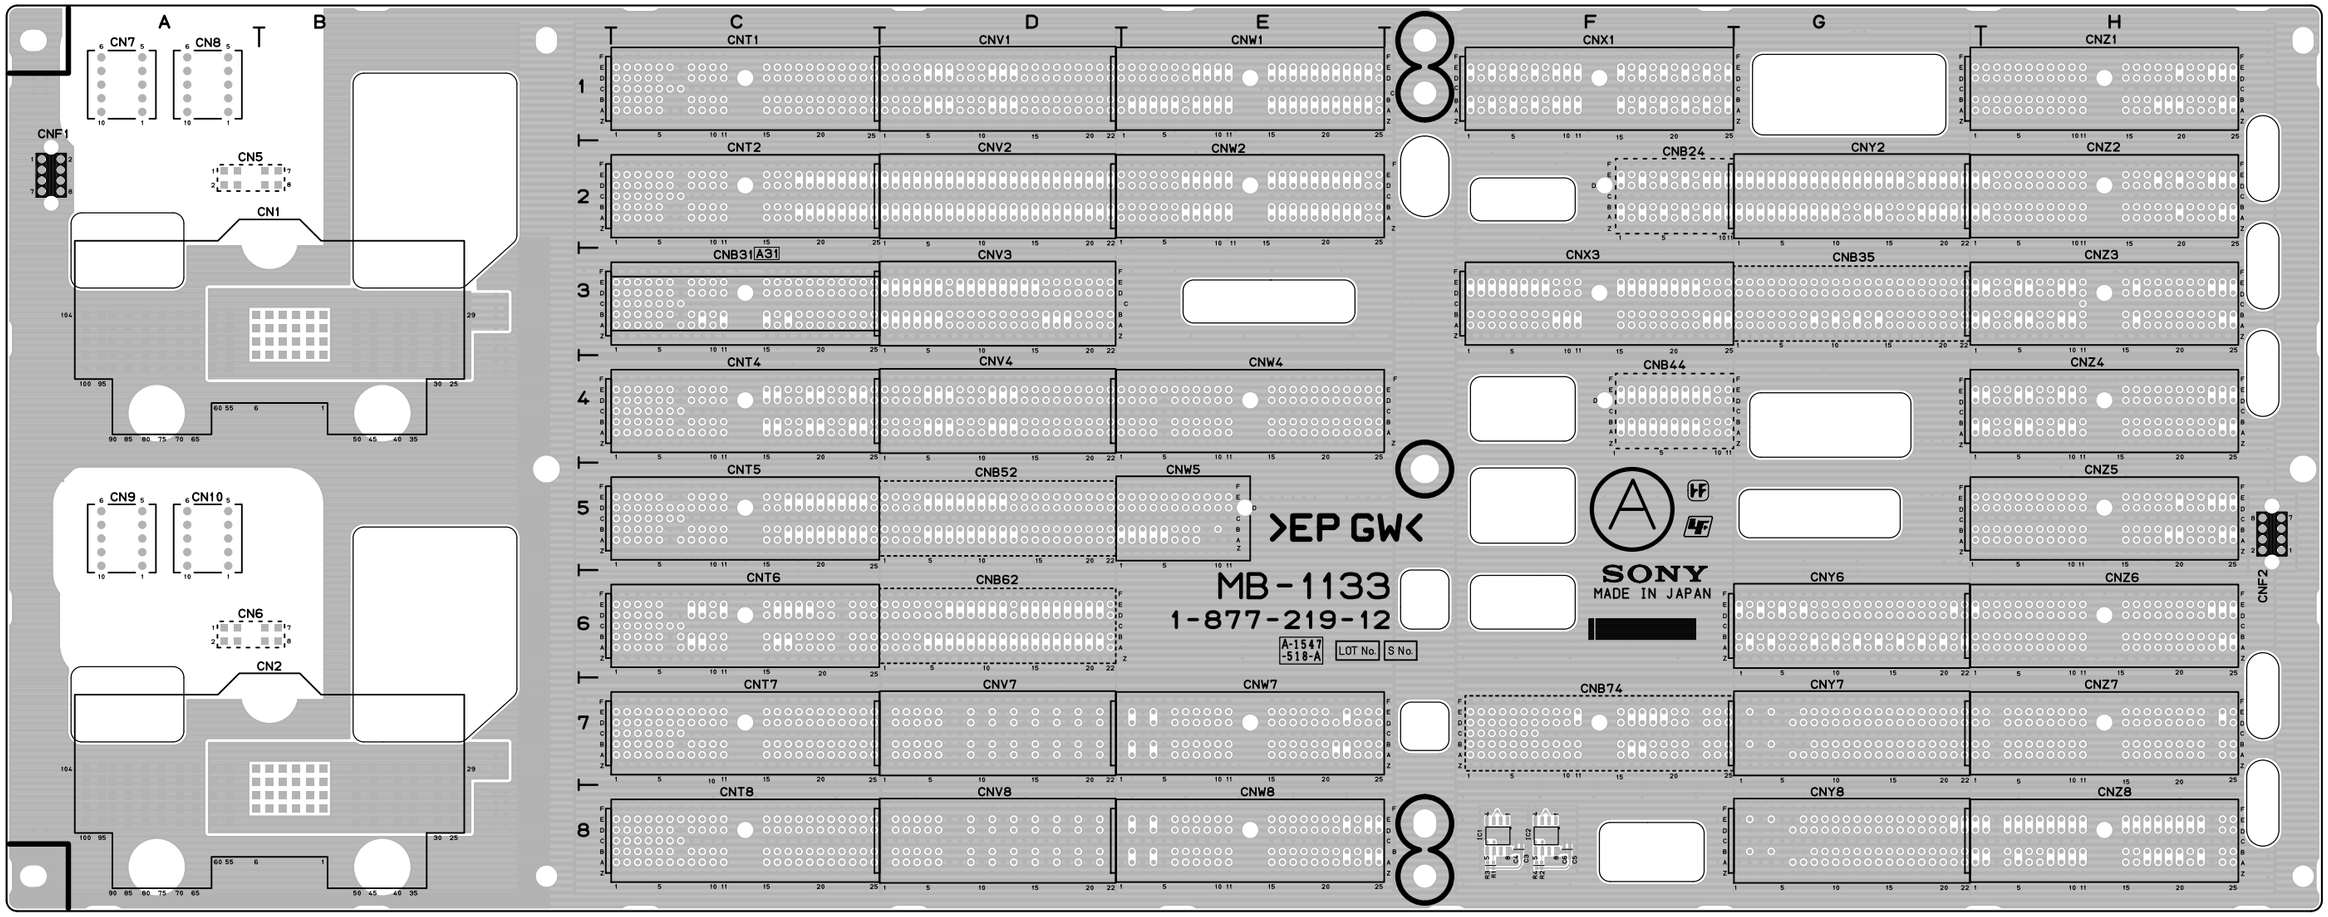

MB-1133 -A SIDE-
SUFFIX: -12

MB-1133 (1-877-219-12)
---
*:B SIDE

C1	*G6	CNB52	*E4	CNV8	E1	CNZ4	B5
C2	*G1	CNB62	*E3			CNZ5	B4
C3	C1	CNB74	*C2	CNW1	E8	CNZ6	B3
C4	C1			CNW2	E7	CNZ7	B2
C5	C1	CNF1	*H7	CNW4	E5	CNZ8	B1
C6	C1	CNF2	*A4	CNW5	E4		
				CNW7	E2	IC1	C1
CN1	G6	CNT1	F8	CNW8	E1	IC2	C1
CN2	G1	CNT2	F7				
CN5	*H7	CNT4	F5	CNX1	C8	R1	C1
CN6	*H3	CNT5	F4	CNX3	C6	R2	C1
CN7	H8	CNT6	F3			R3	C1
CN8	H8	CNT7	F2	CNY2	B7	R4	C1
CN9	H4	CNT8	F1	CNY6	B3		
CN10	H4			CNY7	B2		
		CNV1	E8	CNY8	B1		
CNB24	*C7	CNV2	E7				
CNB31	*F6	CNV3	E6	CNZ1	B8		
CNB35	*B6	CNV4	E5	CNZ2	B7		
CNB44	*C5	CNV7	E2	CNZ3	B6		

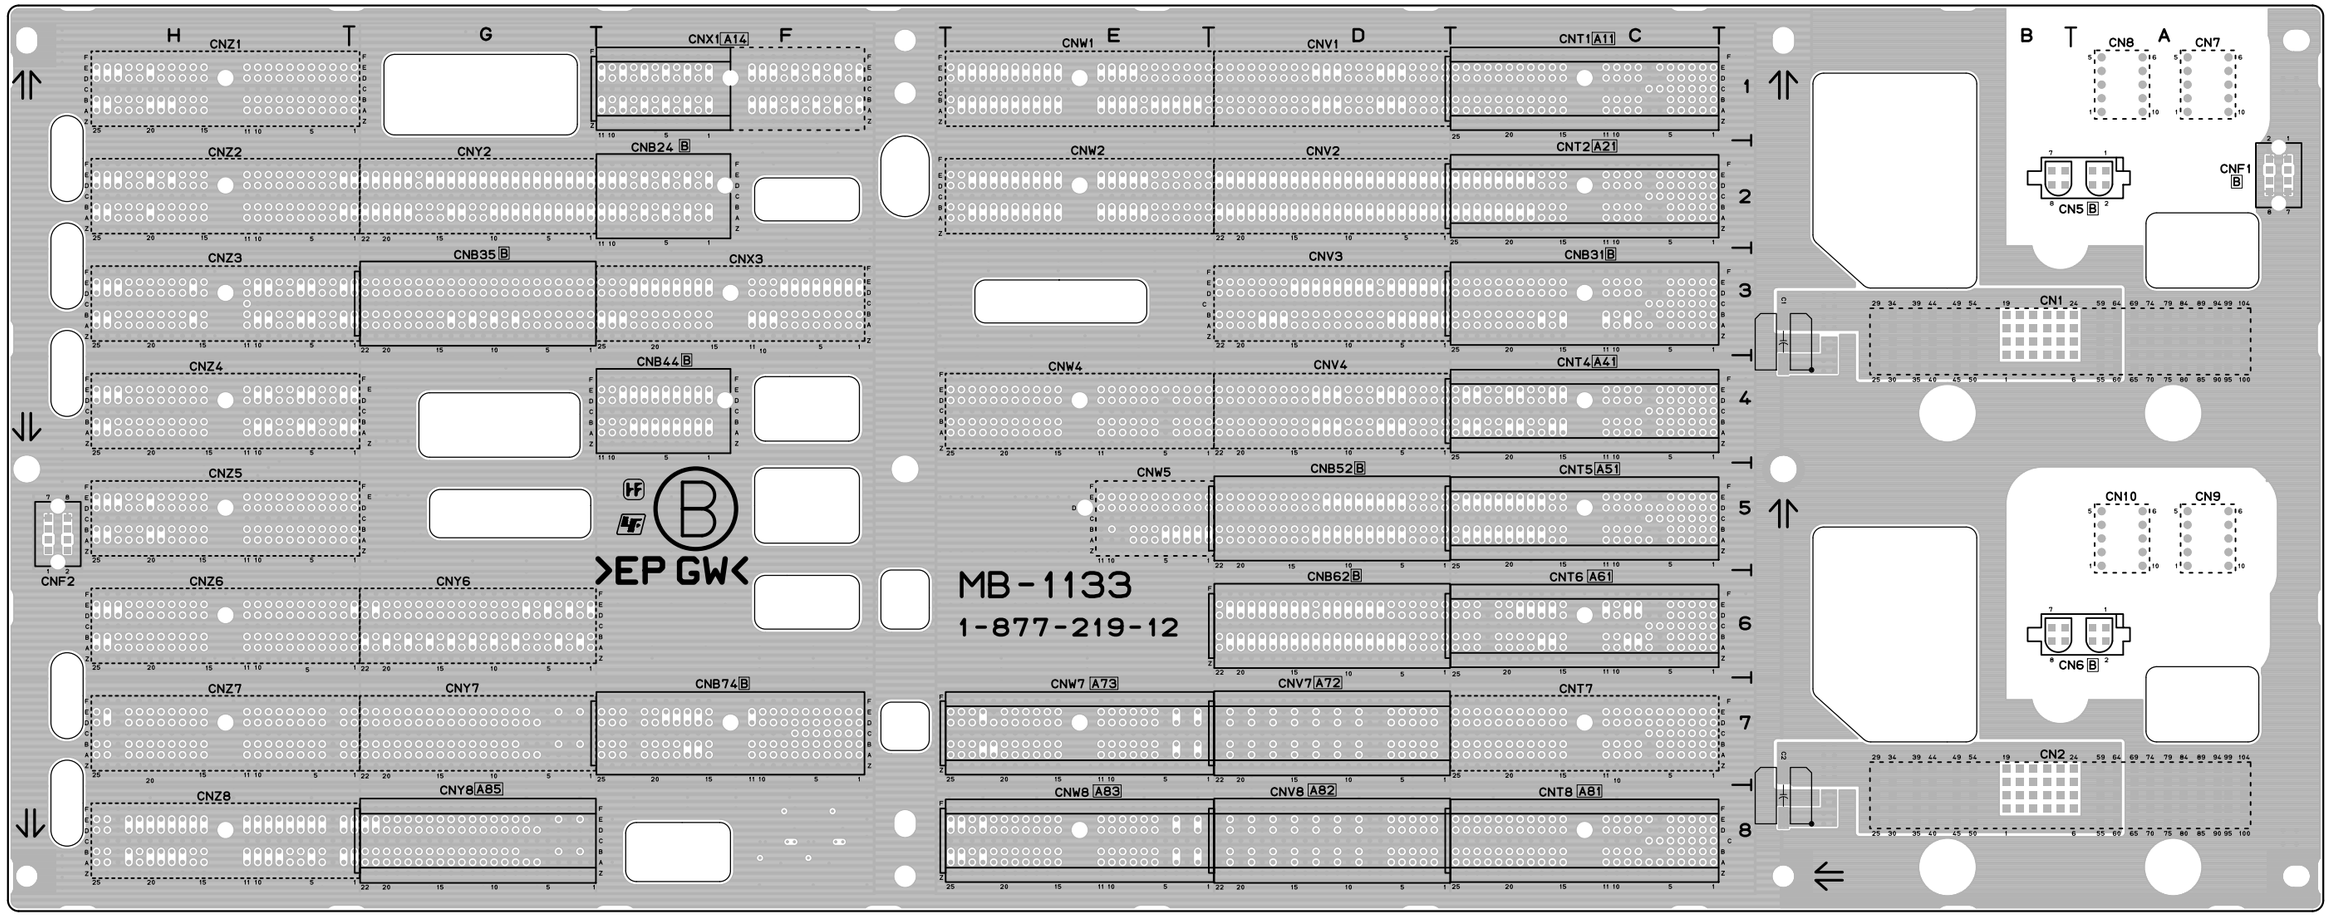


MB-1133 -B SIDE-
SUFFIX: -12

MIX-52 (1-877-212-12)
---
*:B SIDE


| | | |

C5195	*E4	C5354	*K5	C5451	*K4	CL1237	L10	CL2703	*G13	DD200	G2	IC500	*A9	L4906	*D5	R210	*K2	R318	N12	R526	E8	R623	*C10	R1015	E10	R1428	A12	R1531	B6	R2100	G4	R2906	D4	R3209	N10	RB600	*B10
C5196	*D4	C5355	*K5	C5452	*K5	CL1238	L10	CL2704	*H13	DD201	L2	IC700	B6	L4907	*D3	R211	*M2	R319	N12	R527	E8	R624	*C10	R1100	*N5	R1429	A12	R1532	B6	R2101	J5	R2907	D4	R3210	N10	RB601	*B10
C5197	*D4	C5356	*K5	C5453	*L5	CL1239	L10	CL2705	*H13	DD202	M2	IC701	*C10	L4908	*D3	R212	*M2	R400	J8	R528	E8	R625	*B10	R1101	N5	R1430	A12	R1533	B6	R2102	*G5	R2908	*D4	R3211	N10	RB602	*B10
C5198	*E4	C5357	*K6	C5454	*K5	CL1240	H10	CL2800	*D6	DD203	J2	IC702	C6	L4909	*E5	R213	*J2	R401	P12	R529	E8	R626	*B10	R1102	*K10	R1431	A12	R1534	B6	R2103	*G5	R2909	*D4	R3212	P10	RB603	*B10
C5199	*E5	C5358	*K5	C5455	*L5	CL1241	H10	CL2801	D7	DD204	F2	IC703	C7	L5300	*K4	R214	*J2	R402	P12	R530	E8	R627	*B10	R1103	*H10	R1432	A12	R1535	B5	R2104	*G5	R2910	E5	R3213	N10	RB604	*B10
C5200	*E5	C5359	*K5	C5456	*K5	CL1242	H10	CL2802	*C6	DD205	D2	IC704	*C10	L5301	*K4	R215	*E2	R403	R12	R531	E8	R628	*B10	R1104	*N9	R1433	A12	R1536	B5	R2105	*G5	R2911	D5	R3214	N10	RB605	*B10
C5201	*E4	C5360	*K5	C5457	*K5	CL1243	H10	CL2803	*C6	DD206	C2	IC705	B6	L5302	*J5	R216	*E2	R404	R12	R532	E8	R629	*B10	R1105	N9	R1434	A12	R1537	B5	R2106	*G5	R2912	*D4	R3215	P10	RB606	*B10
C5202	*E4	C5361	*K6	C5458	*K4	CL1244	F8	CL2804	*D7			IC706	E10	L5303	*L5	R217	*D2	R405	J8	R533	E9	R630	*B10	R1106	*F7	R1435	A12	R1538	B5	R2107	*G5	R2913	*D4	R3216	N10	RB607	*B10
C5203	*E4	C5362	*K5	C5459	*K4	CL1245	F8	CL2805	*D7	E1	P12	IC707	E10	L5304	*J5	R218	*B2	R406	N9	R534	E9	R631	*B10	R1107	*N7	R1436	A12	R1539	B5	R2108	*G5	R2914	D4	R3217	N10	RB608	*C11
C5204	*E4	C5363	*K5	C5460	*K4	CL1246	F8	CL2900	*D3	E2	F13	IC708	A8	L5305	*L5	R219	*G2	R407	*N8	R535	E9	R632	*C10	R1108	N7	R1437	A12	R1540	B5	R2109	*G5	R2915	D5	R3218	M3	RB609	*D11
C5205	*E4	C5364	*J5	C5461	*K4	CL1247	F8	CL2901	D4	E3	A13	IC709	R10	L5306	*K6	R220	*G2	R408	*P12	R536	E9	R633	*C10	R1109	*F5	R1438	A12	R1541	B5	R2110	*G4	R3000	*J12	R3219	M3	RB610	*D11
C5206	*E4	C5365	*K5	C5462	K4	CL1248	F5	CL2902	*C4	E4	P6	IC710	P13	L5307	*K6	R221	*K2	R409	*P12	R537	E9	R634	*C10	R1110	K4	R1439	*N7	R1542	B5	R2111	*G4	R3001	*J12	R3220	N3	RB611	*C11
C5207	*E4	C5366	*J5	C5463	K4	CL1249	F5	CL2903	*C4	E5	K7	IC800	D11			R222	*K2	R410	*P12	R538	E9	R635	*C10	R1224	N5	R1440	*N7	R1543	D8	R2112	*G4	R3002	*G12	R3221	N3	RB612	*C11
C5208	*E4	C5367	*K5	C5464	*K5	CL1250	F5	CL2904	*D5	E6	B8	IC801	C11	Q100	N2	R223	*M2	R411	*R12	R539	*E9	R636	*C10	R1225	N9	R1441	*N7	R1544	D8	R2113	*G4	R3003	*G12	R3222	N3	RB613	*C11
C5209	*E4	C5368	*K5	C5465	*K5	CL1251	F5	CL2905	*D5	E7	P1	IC802	D11	Q200	N2	R224	*M2	R412	*N8	R540	E9	R637	*C10	R1226	N7	R1442	*N7	R1545	*E8	R2114	*G5	R3004	*J11	R3223	N3	RB700	*B6
C5210	*E4	C5369	*K5	C5466	K6	CL1252	K6	CL3000	*K12	E8	J1	IC803	C11	Q201	N2	R225	*J2	R413	J8	R541	E8	R638	*B10	R1227	N5	R1443	*N7	R1546	*E5	R2115	*G4	R3005	*J11	R3224	M3	RB701	*C7
C5211	*E4	C5370	*K5	C5467	K6	CL1253	K6	CL3001	*G12	E9	B1	IC900	B12	Q202	N2	R226	*J2	R414	*J8	R542	E8	R639	*C10	R1228	N9	R1444	*N7	R1547	*E8	R2116	*G4	R3006	*G11	R3225	P3	RB800	*C12
C5212	*E4	C5371	*K5	C5468	*K5	CL1254	K6	CL3002	*K12	E10	D5	IC901	A11	Q203	N2	R227	*E2	R415	J8	R543	E8	R640	*C10	R1229	N7	R1445	A12	R1548	*E5	R2117	*G5	R3007	*G11	R3226	N3	RB801	*C12
C5213	*E4	C5372	*K5	C5469	*K5	CL1255	K6	CL3003	*G12	E11	*R12	IC902	B11	Q204	A5	R228	*E2	R416	*J8	R544	E8	R641	*C10	R1230	J6	R1446	A12	R1549	*E8	R2118	G5	R3008	*J12	R3227	N3	RB802	*D12
C5214	*E4	C5373	*J5			CL1256	K6	CL3004	*K11	E12	*J13	IC903	B11	Q205	A5	R229	*D2	R417	N8	R545	E8	R642	*C10	R1231	J6	R1447	A12	R1550	*E5	R2200	*J10	R3009	*J12	R3228	P3	RB803	*D12
C5215	*E4	C5374	*J5	CL300	P12	CL1257	K6	CL3005	*H11	E13	*B13	IC1000	E12	Q206	N2	R230	*D2	R418	M8	R546	E8	R643	*C10	R1232	K6	R1448	B12	R1551	*E8	R2201	*J10	R3010	*G12	R3229	N3	RB804	*C12
C5216	*E4	C5375	*K5	CL301	P12	CL1258	J6	CL3006	J12	E14	*R6	IC1001	E12	Q207	N2	R231	*B2	R419	M8	R547	E8	R644	*C10	R1233	K6	R1449	B12	R1552	*E5	R2202	*J10	R3011	*G12	R3300	*N4	RB805	*C12
C5217	*D4	C5376	*K5	CL302	M12	CL1259	J6	CL3007	G12	E15	*H6	IC1002	E11	Q208	N2	R232	*B2	R420	M8	R548	E9	R645	*C10	R1234	J6	R1450	*L5	R1553	J9	R2203	*K10	R3012	*J11	R3301	*N5	RB806	*C12
C5218	*E4	C5377	*K5	CL400	N9	CL1300	B7	CL3100	*D7	E16	*A6	IC1003	E10	Q209	A5	R233	A5	R421	M8	R549	D8	R646	*C10	R1235	J6	R1451	*K5	R1554	*E8	R2204	*L10	R3013	*J11	R3302	*N5	RB807	*C12
C5219	*E4	C5378	*K5	CL401	N8	CL1301	B7	CL3101	*D4	E17	*P1	IC1200	N5	Q210	A5	R234	A4	R422	M8	R550	D8	R647	*C10	R1236	K6	R1452	*K4	R1555	*E5	R2205	*K11	R3014	*G11	R3303	*N5	RB808	*C11
C5220	*E4	C5379	*K5	CL402	N7	CL1302	B7	CL3102	*D7	E18	*G1	IC1201	N9	Q211	N2	R235	A3	R423	M8	R551	D8	R648	*C10	R1237	K6	R1453	*K4	R1556	*E8	R2300	*G10	R3015	*G11	R3304	*N4	RB809	*C11
C5221	*E4	C5380	*K5	CL403	N6	CL1303	B7	CL3103	*D4	E19	*A2	IC1202	N7	Q212	A4	R236	A4	R424	N8	R552	D8	R649	*C10	R1238	J4	R1454	*K4	R1557	*E5	R2301	*G10	R3016	*K11	R3305	*N4	RB810	*D11
C5222	*E4	C5381	*K4	CL404	F4	CL2109	G3	CL3104	*E7	E20	*D8	IC1203	J4	Q213	A4	R237	A3	R425	N8	R553	E8	R650	*C10	R1239	J4	R1455	*G10	R1558	H3	R2302	*G10	R3017	*L11	R3306	*N4	RB811	*D11
C5223	*E4	C5382	*J4	CL405	*K4	CL2200	J10	CL3105	*E5	E21	A5	IC1300	C8	Q214	A4	R238	A3	R426	N8	R554	E8	R651	*C10	R1300	B8	R1456	*G9	R1559	H3	R2303	*G10	R3018	*H11	R3307	*N4	RB812	*C11
C5224	*E4	C5383	*K5	CL406	K10	CL2201	J10	CL3106	E6			IC1301	B8	Q215	A4	R239	A2	R427	N8	R555	E8	R652	*C10	R1301	B8	R1457	*G10	R1560	*G9	R2304	*H10	R3019	*H11	R3308	*N4	RB813	*C11
C5225	*E4	C5384	*K4	CL407	G10	CL2202	J11	CL3107	E3	F1	R1	IC1400	A11	Q216	A3	R240	A3	R428	N8	R556	E8	R653	*C10	R1302	B8	R1458	*G10	R1561	*N5	R2305	*H11	R3020	*J12	R3309	*N5	RB814	*C11
C5226	*E4	C5385	*K5	CL408	F7	CL2203	J10			F200	H1	IC1500	B6	Q217	A3	R241	A3	R429	N8	R557	E8	R654	*C10	R1303	B8	R1459	*G10	R1562	H6	R2400	*F6	R3021	*G12	R3310	*N4	RB815	*C11
C5227	*E4	C5386	*K5	CL409	N5	CL2204	J11	CN600	B10	F201	L1	IC1501	B6	Q218	A3	R242	A3	R430	N8	R558	E11	R655	*C10	R1304	*B8	R1460	*G10	R1563	*N9	R2401	*F6	R3022	*K12	R3311	*N5	RB900	*B12
C5228	*E4	C5387	*K4	CL410	N9	CL2205	J10	CN700	A7	F202	N1	IC1502	B5	Q219	A3	R243	A5	R431	N8	R559	E9	R656	*C10	R1305	B8	R1461	*K10	R1564	*N7	R2402	*F6	R3023	*H12	R3312	*N5	RB901	*A11
C5229	*E4	C5388	*K5	CL411	N9	CL2206	J10	CN701	A8	F203	K1	IC2600	J13	Q220	A3	R244	A5	R432	N8	R560	E11	R657	*C10	R1306	*B8	R1462	*K9	R1565	E3	R2403	*F6	R3024	J11	R3313	*N5	RB902	*B12
C5230	*E4	C5389	*K4	CL412	N9	CL2207	K10	CN1500	A6	F204	G1	IC2601	K13	Q221	A3	R245	A5	R433	N8	R561	*E8	R658	*C10	R1307	*B8	R1463	*K10	R1566	E3	R2404	*F7	R3025	G11	R3314	*N4	RB903	*B12
C5231	*E4	C5390	*K4	CL413	N9	CL2208	K11	CN1501	L11	F205	E1	IC2700	G13	Q300	*N12	R246	A4	R434	N8	R562	E12	R659	*C10	R1308	*B8	R1464	*K10	R1567	*L4	R2405	*E7	R3026	*J11	R3315	*N4	RB904	*A11
C5232	*E4	C5391	*K5	CL500	*E9	CL2209	K10	CN1502	H11	F206	C1	IC2701	H13	Q301	*N12	R247	A4	R435	N8	R563	*E8	R660	*C10	R1309	C8	R1465	*K10	R1568	G3	R2500	*F3	R3027	*J11	R3316	*N4	RB905	*B12
C5233	*E4	C5392	*K4	CL501	*E9	CL2210	K11	CN1503	E8			IC2800	D6	Q302	*N12	R248	A5	R436	N8	R564	E13	R661	*C10	R1310	C8	R1466	*K10	R1700	K9	R2501	*F3	R3028	*J12	R3317	*N4	RB906	*B12
C5234	*E4	C5393	*K5	CL502	*E9	CL2211	K10	CN1504	E5	FB400	J8	IC2801	D7			R249	A5	R437	N8	R565	E9	R662	*C10	R1311	C8	R1467	*G7	R1701	*L9	R2502	*F3	R3029	*G11	R3500	*N8	RB907	*A11
C5235	*E4	C5394	*K5	CL503	D8	CL2212	L11			FB401	J7	IC2900	D4	R1	A2	R250	A5	R438	N8	R566	*E8	R663	*C10	R1312	C8	R1468	*G7	R1702	*L9	R2503	*F4	R3030	*G11	R3501	*N8	RB908	*B12
C5236	*E3	C5395	*K5	CL700	*E9	CL2213	K10	CNT1	R2	FB3300	*P5	IC2901	D5	R2	A2	R251	N2	R439	N8	R567	E8	R664	*C10	R1313	C8	R1469	*F7	R1703	*L9	R2504	*F5	R3031	*G12	R3502	*N9	RB909	*B12
C5237	*E5	C5396	*K5	CL701	*E9	CL2214	L10	CNV1	R4	FB3301	*P5	IC3200	P10	R3	A2	R252	A4	R440	N8	R568	E9	R665	*C10	R1314	*C8	R1470	*F7	R1704	K9	R2505	*E5	R3032	J11	R3503	*N8	RB910	*A11
C5300	*J4	C5397	*K5	CL702	*E9	CL2300	F10	CNX1	R8	FB3302	*P5	IC3201	M10	R4	A9	R253	A4	R441	N8	R569	*E8	R666	*C10	R1315	*B8	R1471	*F7	R1705	K9	R2600	*J13	R3033	G11	R3504	*N8	RB911	*B12
C5301	*L4	C5398	*K5	CL1100	*N5	CL2301	F10	CNZ1	R12	FB3303	*P4	IC3202	N10	R5	A8	R254	A4	R442	N8	R570	E8	R667	*C10	R1316	C8	R1472	*F7	R1706	*L9	R2601	*K13	R3034	*J11	R3505	*N8	RB912	*B11
C5302	*L4	C5399	*K4	CL1101	M5	CL2302	G11			FB3304	R2	IC3203	M3	R50	R1	R255	A5	R443	M6	R571	E9	R668	*C10	R1317	C8	R1473	*G4	R1707	*L9	R2602	*J12	R3035	*G11	R3506	*N8	RB913	*B11
C5303	*L4	C5400	*K5	CL1102	*K9	CL2303	F10	D1	R1	FB3500	*P8	IC3204	P3	R51	R1	R256	A4	R444	N6	R572	*E8	R700	*C10	R1318	*C8	R1474	*G4	R1708	*L9	R2603	*K12	R3036	*J11	R3507	*N8	RB914	*B11
C5304	*L5	C5401	*K4	CL1103	K10	CL2304	G11	D2	A2	FB3501	*P8	IC3205	N3	R52	R1	R257	A4	R445	N6	R573	E8	R701	*D10	R1319	*C8	R1475	*F4	R1709	*K9	R2604	J12	R3037	*G11	R3508	*N8	RB915	*B11
C5305	*K5	C5402	*K4	CL1104	*H9	CL2305	G10	D200	A5	FB3502	*P8			R53	R1	R258	N2	R446	N6	R574	*E8	R702	*D10	R1320	*C8	R1476	*F4	R1710	*K9	R2605	J12	R3038	G11	R3509	*N8	RB3000	*A7
C5306	*L5	C5403	*K5	CL1105	G10	CL2306	G10	D201	A4	FB3503	*P8	L300	P12	R54	R2	R259	A4	R447	N7	R575	*E9	R703	*C10	R1321	*C8	R1477	*F4	R1711	*K9	R2606	K12	R3100	*E6	R3510	*N8	RB3001	*B7
C5307	*K5	C5404	*K4	CL1106	*N9	CL2307	G10	D202	N2	FB3700	*P7	L1300	C8	R55	R1	R260	A4	R448	*N6	R576	*E9	R704	*C10	R1322	C8	R1478	*F4	R1712	K9	R2607	K12	R3101	*E6	R3511	*N9	RB3002	*A7
C5308	*L5	C5405	*K5	CL1107	M9	CL2308	G11	D203	A4	FB3701	*P6	L1301	C8	R56	R1	R261	A4	R449	*N6	R577	E8	R705	*C10	R1323	C8	R1479	*K5	R1713	*K9	R2608	*K12	R3102	*E3	R3512	*N8	RB3003	*B7
C5309	*K5	C5406	*K4	CL1108	*G7	CL2309	G10	D204	A4	FB3702	*P7	L1302	B8	R57	R1	R262	A4	R450	N6	R578	*E8	R706	B6	R1324	*C8	R1480	*K5	R1714	*K9	R2609	*K12	R3103	*E3	R3513	*N8	RB3100	*A7
C5310	*K5	C5407	*K4	CL1109	F7	CL2310	G11	D205	A3	FB3703	*P6	L3300	*M5	R58	E9	R263	A4	R451	M6	R579	E8	R707	B6	R1325	*C8	R1481	*K5	R1715	*K9	R2610	K12	R3104	*E6	R3514	*N8	RB3101	*B7
C5311	*K5	C5408	*K5	CL1110	*N7	CL2311	H10	D206	A3	FB5301	*K4	L3301	*M5	R59	E9	R264	A4	R452	M6	R580	E8	R708	*D9	R1326	*B8	R1482	*N7	R1716	*K9	R2611	K12	R3105	*E6	R3515	*N8	RB3102	*A6
C5312	*K5	C5409	*K4	CL1111	M7	CL2312	H11	D207	A2	FB5302	K4	L3302	*N5	R60	E9	R265	A4	R453	M6	R581	E9	R709	*D9	R1327	*B8	R1483	*N7	R1717	K9	R2612	*K12	R3106	*E3	R3516	*N8	RB3103	*B6
C5313	*L5	C5410	*K5	CL1112	*G4	CL2313	H10	D208	R5	FB5303	K6	L3303	*N4	R61	E9	R266	A4	R454	M6	R582	E8	R710	*C9	R1328	*C8	R1484	*N7	R1800	G7	R2613	*K12	R3107	*E3	R3517	*N8		
C5314	*K5	C5411	*K5	CL1113	F4	CL2314	H10	D209	R10			L3500	*M8	R62	E9	R267	A4	R455	K6	R583	*D8	R711	*C9	R1329	*C8	R1485	*N7	R1801	*G7	R2614	K12	R3108	*E6	R3700	*N6	S1	A8
C5315	*L5	C5412	*K4	CL1114	*K4	CL2400	F6	D210	R6	FL1300	*C8	L3501	*M8	R63	E9	R268	B4	R456	N5	R584	E8	R712	*C9	R1330	*C8	R1486	*N5	R1802	*G7	R2615	K12	R3109	*E6	R3701	*N7	S600	A9
C5316	*K5	C5413	*K5	CL1115	*K4	CL2401	F6	D211	N2			L3502	*N9	R64	D8	R269	A4	R457	*K10	R585	*D8	R713	E10	R1331	*C8	R1487	*N5	R1803	*G7	R2700	*G13	R3110	*E3	R3702	*N7	S700	A6
C5317	*L5	C5414	*K4	CL1200	N5	CL2402	F6	D500	A9	IC1	E9	L3503	*N8	R65	D8	R270	A4	R458	*G10	R586	E10	R714	E10	R1332	*C8	R1488	*N5	R1804	G7	R2701	*H13	R3111	*E3	R3703	*N6		
C5318	*K5	C5415	*K5	CL1201	N5	CL2403	F6	D501	A10	IC2	N5	L3700	*M7	R66	D8	R271	A4	R459	*F7	R587	*D8	R715	A8	R1333	*C8	R1489	*N5	R1805	G7	R2702	*G12	R3112	*E6	R3704	*N6	SL200	N1
C5319	*K5	C5416	*L4	CL1202	P5	CL2404	F6	D502	A9	IC3	N8	L3701	*M6	R67	E9	R272	A4	R460	*F4	R588	E9	R716	B8	R1334	*C8	R1490	*N9	R1806	*G7	R2703	*H12	R3113	*E6	R3705	*N6	SL201	R5
C5320	*K5	C5417	*K5	CL1203	N5	CL2405	F6	D503	A9	IC4	N6	L3702	*N7	R68	E9	R273	A3	R461	*N4	R589	*D8	R717	P10	R1335	*C8	R1491	*N9	R1807	*G7	R2704	G12	R3114	*E3	R3706	*N6	SL202	R10
C5321	*K5	C5418	*L4	CL1204	P5	CL2406	F6	D504	A9	IC5	K10	L3703	*N6	R69	E8	R274	A3	R462	*N4	R590	*A9	R718	E10	R1336	*B8	R1492	*N9	R1808	*G7	R2705	G12	R3115	*E3	R3707	*N6	SL203	R6
C5322	*L5	C5419	*K5	CL1205	P5	CL2407	F6	D3000	A7	IC6	K11	L3900	*J9	R70	E8	R275	A3	R463	*N9	R591	*A9	R719	R10	R1337	*B8	R1493	*N9	R1809	*G7	R2706	G12	R3116	*E7	R3708	*N6		
C5323	*K5	C5420	*K5	CL1206	P5	CL2408	F6	D3001	B7	IC7	G10	L3901	*K10	R71	E8	R276	A3	R464	*N9	R592	*A9	R720	E10	R1338	*B8	R1500	*L12	R1810	*G7	R2707	G12	R3117	*E7	R3709	*N7	TP1	A2
C5324	*K5	C5421	*K5	CL1207	N5	CL2409	F7	D3002	B7	IC8	G11	L3902	*L10	R72	E8	R277	A3	R465	*N7	R593	*A9	R721	E10	R1339	*B8	R1501	*H12	R1811	*G7	R2708	*G12	R3118	*E5	R3710	*N6	TP100	N2
C5325	*K5	C5422	*L4	CL1208	N9	CL2410	F7	D3003	B7	IC9	F7	L3903	*J10	R73	E8	R278	A3	R466	*N7	R594	*A9	R722	E10	R1340	*B8	R1502	A6	R1812	G7	R2709	*G12	R3119	*E5	R3711	*N7	TP101	R5
C5326	*L5	C5423	*J5	CL1209	N9	CL2411	F7	D3004	A7	IC10	E7	L3904	*C9	R74	E8	R279	A3	R467	*N5	R595	E9	R723	E10	R1400	*N5	R1503	*L11	R1813	*G7	R2710	H12	R3120	*E6	R3712	*N6	TP102	R10
C5327	*K5	C5424	*K6	CL1210	P9	CL2412	E8	D3005	A7	IC11	F4	L3905	*H10	R100	N2	R280	A3	R468	*N5	R596	*E8	R724	D10	R1401	*N5	R1504	*H11	R1814	*G7	R2711	H12	R3121	*E3	R3713	*N6	TP103	R6
C5328	*K5	C5425	*K4	CL1211	N9	CL2413	F7	D3006	B7	IC12	E4	L3906	*H10	R101	N2	R281	A3	R500	E9	R597	*E8	R725	D10	R1402	*N5	R1505	A6	R1815	*G7	R2712	*G12	R3122	*E7	R3714	*N6	TP200	A5
C5329	*K5	C5426	*K4	CL1212	P9	CL2414	F7	D3007	B7	IC13	K5	L3907	*F10	R102	R5	R282	A3	R501	*E8	R598	*E8	R726	D10	R1403	*N5	R1506	*L11	R1816	*G7	R2713	*H12	R3123	*E5	R3715	*N6	TP201	A4
C5330	*K5	C5427	*J5	CL1213	P9	CL2500	F3	D3008	A7	IC100	P2	L4200	*G6	R103	R5	R283	A3	R502	*E8	R599	E8	R727	D10	R1404	*N5	R1507	*H11	R1817	G7	R2714	G12	R3124	E6	R3716	*N6	TP202	A3
C5331	*L5	C5428	*L5	CL1214	P9	CL2501	F3	D3009	B7	IC101	R5	L4201	*F7	R104	R5	R284	A3	R503	*E8	R600	*B10	R728	E10	R1405	A11	R1508	A6	R1900	L5	R2715	H12	R3125	E3	R3717	*N6	TP203	A4
C5332	*K5	C5429	*J5	CL1215	N9	CL2502	F3	D3010	B7	IC102	R10	L4202	*G7	R105	R5	R285	A3	R504	*E8	R601	*B10	R729	E10	R1406	*N9	R1509	*L11	R1901	M5	R2800	*D6	R3126	*E6	R4500	*L12	TP204	A3
C5333	*L5	C5430	*L5	CL1216	N7	CL2503	F3	D3011	B7	IC103	R6	L4203	*F6	R106	R5	R286	A3	R505	*E8	R602	*C10	R730	E10	R1407	*N9	R1510	*H11	R1902	M8	R2801	*D7	R3127	*E6	R4501	*L12	TP205	A3
C5334	*K5	C5431	*K6	CL1217	N7	CL2504	F4	D3012	A7	IC104	A8	L4204	*G4	R107	R10	R287	A2	R506	*E8	R603	*C10	R731	E10	R1408	*N9	R1511	A6	R1903	M6	R2802	*D6	R3128	*E6	R4502	*J12	TP206	A2
C5335	*L5	C5432	*K6	CL1218	P7	CL2505	F4	D3013	A7	IC105	A8	L4205	*F5	R108	R10	R288	A2	R507	*E8	R604	*C10	R732	E10	R1409	*N9	R1512	*L11	R2000	G9	R2803	*D7	R3129	*E4	R4503	*J12	TP404	N7
C5336	*K5	C5433	*L4	CL1219	N7	CL2506	F4	D3014	B7	IC201	A5	L4206	*G5	R109	R10	R300	R12	R508	E9	R605	*C10	R733	E10	R1410	*N9	R1513	*H11	R2001	J5	R2804	D6	R3130	*E4	R4504	*L12	TP405	N7
C5337	*L5	C5434	*K4	CL1220	P7	CL2507	F4	D3015	B7	IC202	A4	L4207	*F3	R110	R10	R301	*P12	R509	*E8	R606	*B10	R734	E10	R1411	*N9	R1514	A6	R2002	*H9	R2805	D6	R3131	*E3	R4505	*H12	TP406	P7
C5338	*K5	C5435	*K4	CL1221	P7	CL2508	F4	D3100	A7	IC204	A3	L4500	*L12	R111	R10	R302	P12	R510	E9	R607	*C10	R735	E10	R1412	A12	R1515	A6	R2003	*H9	R2806	D6	R3132	E6	R4506	*H12	TP407	P7
C5339	*K5	C5436	*J5	CL1222	P7	CL2509	F4	D3101	B7	IC209	A3	L4501	*L12	R112	R6	R303	P12	R511	*E8	R608	*C10	R1000	D12	R1413	A12	R1516	A6	R2004	*H9	R2807	D6	R3133	E3	R4507	*F12	TP700	*D10
C5340	*K5	C5437	*L5	CL1223	N7	CL2510	F4	D3102	B7	IC300	P12	L4502	*J12	R113	R6	R304	*P12	R512	*E8	R609	*C10	R1001	D12	R1414	A12	R1517	*L11	R2005	*H9	R2808	*D7	R3134	*E6	R4508	*F12	TP701	*C9
C5341	*K5	C5438	*J5	CL1224	*N5	CL2511	F5	D3103	B7	IC301	P12	L4503	*J12	R114	R6	R305	*P12	R513	*E9	R610	*C10	R1002	D12	R1415	A12	R1518	*H11	R2006	*H9	R2809	*D7	R3135	*E3	R4509	*H12		
C5342	*K6	C5439	*L5	CL1225	*N5	CL2512	E5	D3104	A7	IC302	M12	L4504	*L12	R115	R6	R306	*P12	R514	*E8	R611	*C10	R1003	E12	R1416	A12	R1519	B6	R2007	*H9	R2810	E7	R3136	*E6	R4900	*D8	X300	N12
C5343	*K5	C5440	*K6	CL1226	*N5	CL2513	F5	D3105	A7	IC303	P12	L4505	*H12	R116	R6	R307	*P12	R515	*E8	R612	*C10	R1004	D12	R1417	A12	R1520	B6	R2008	*H9	R2811	D7	R3137	*E4	R4901	*D8	X301	N12
C5344	*K5	C5441	*K6	CL1227	*N5	CL2514	F5	D3106	B7	IC304	*P12	L4506	*H12	R200	*H2	R308	N12	R516	*E8	R613	*C10	R1005	D12	R1418	A12	R1521	B6	R2009	*H9	R2812	*D6	R3138	E3	R4902	*D6	X302	N12
C5345	*K5	C5442	*K4	CL1228	*N9	CL2600	*J12	D3107	B7	IC305	*P12	L4507	*F12	R201

Components locations list; previous page

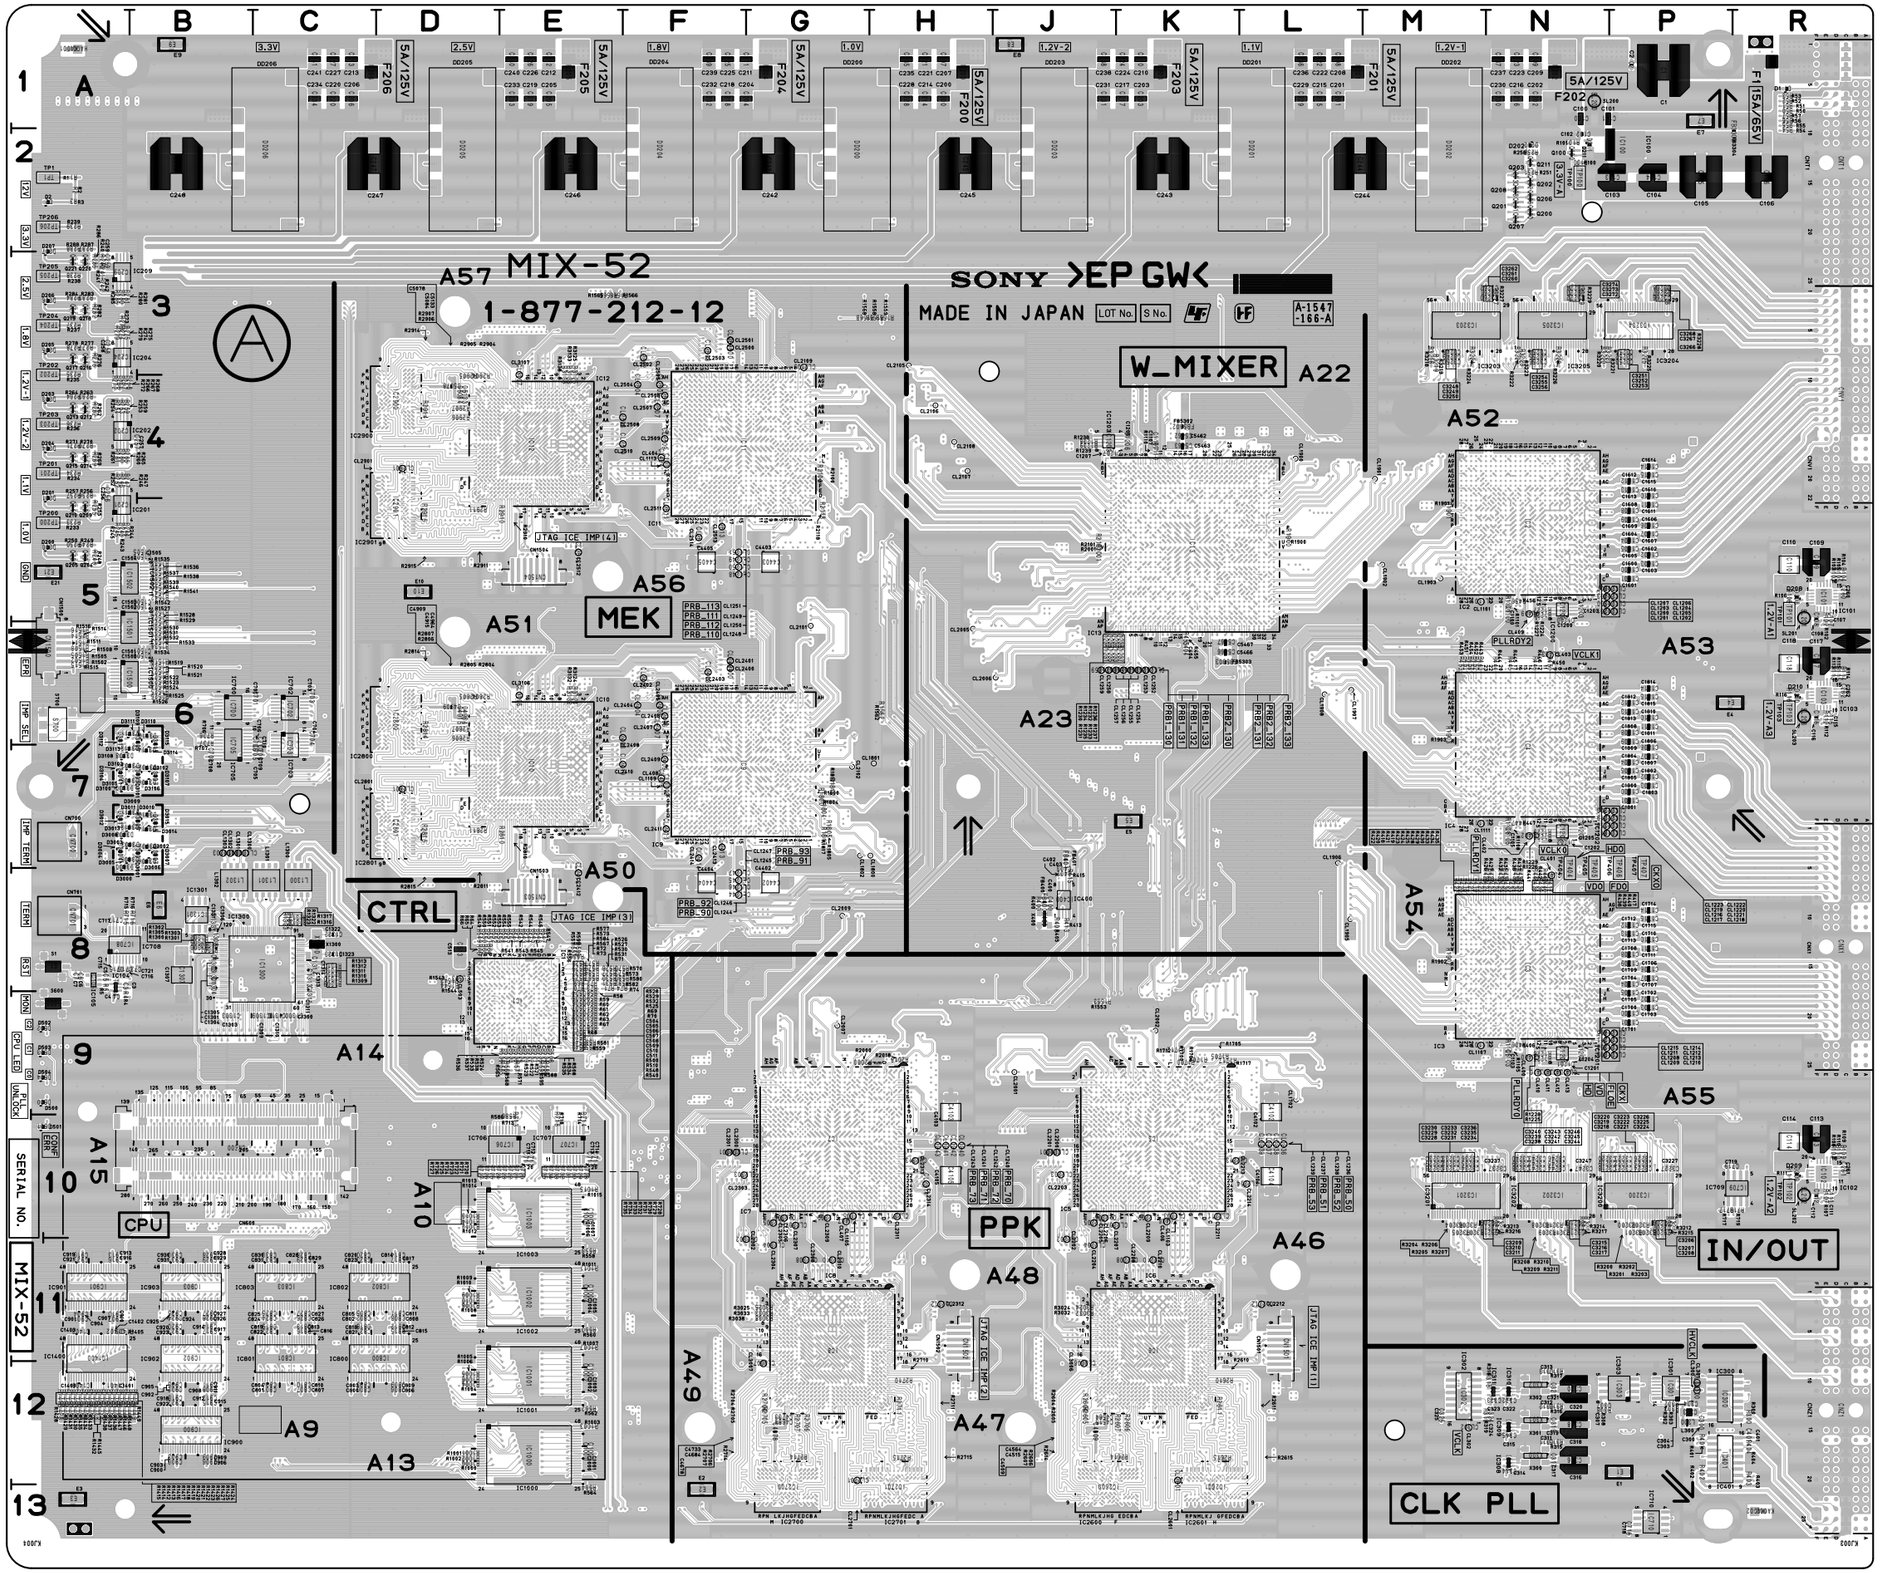

MIX-52 -A SIDE-
SUFFIX: -12

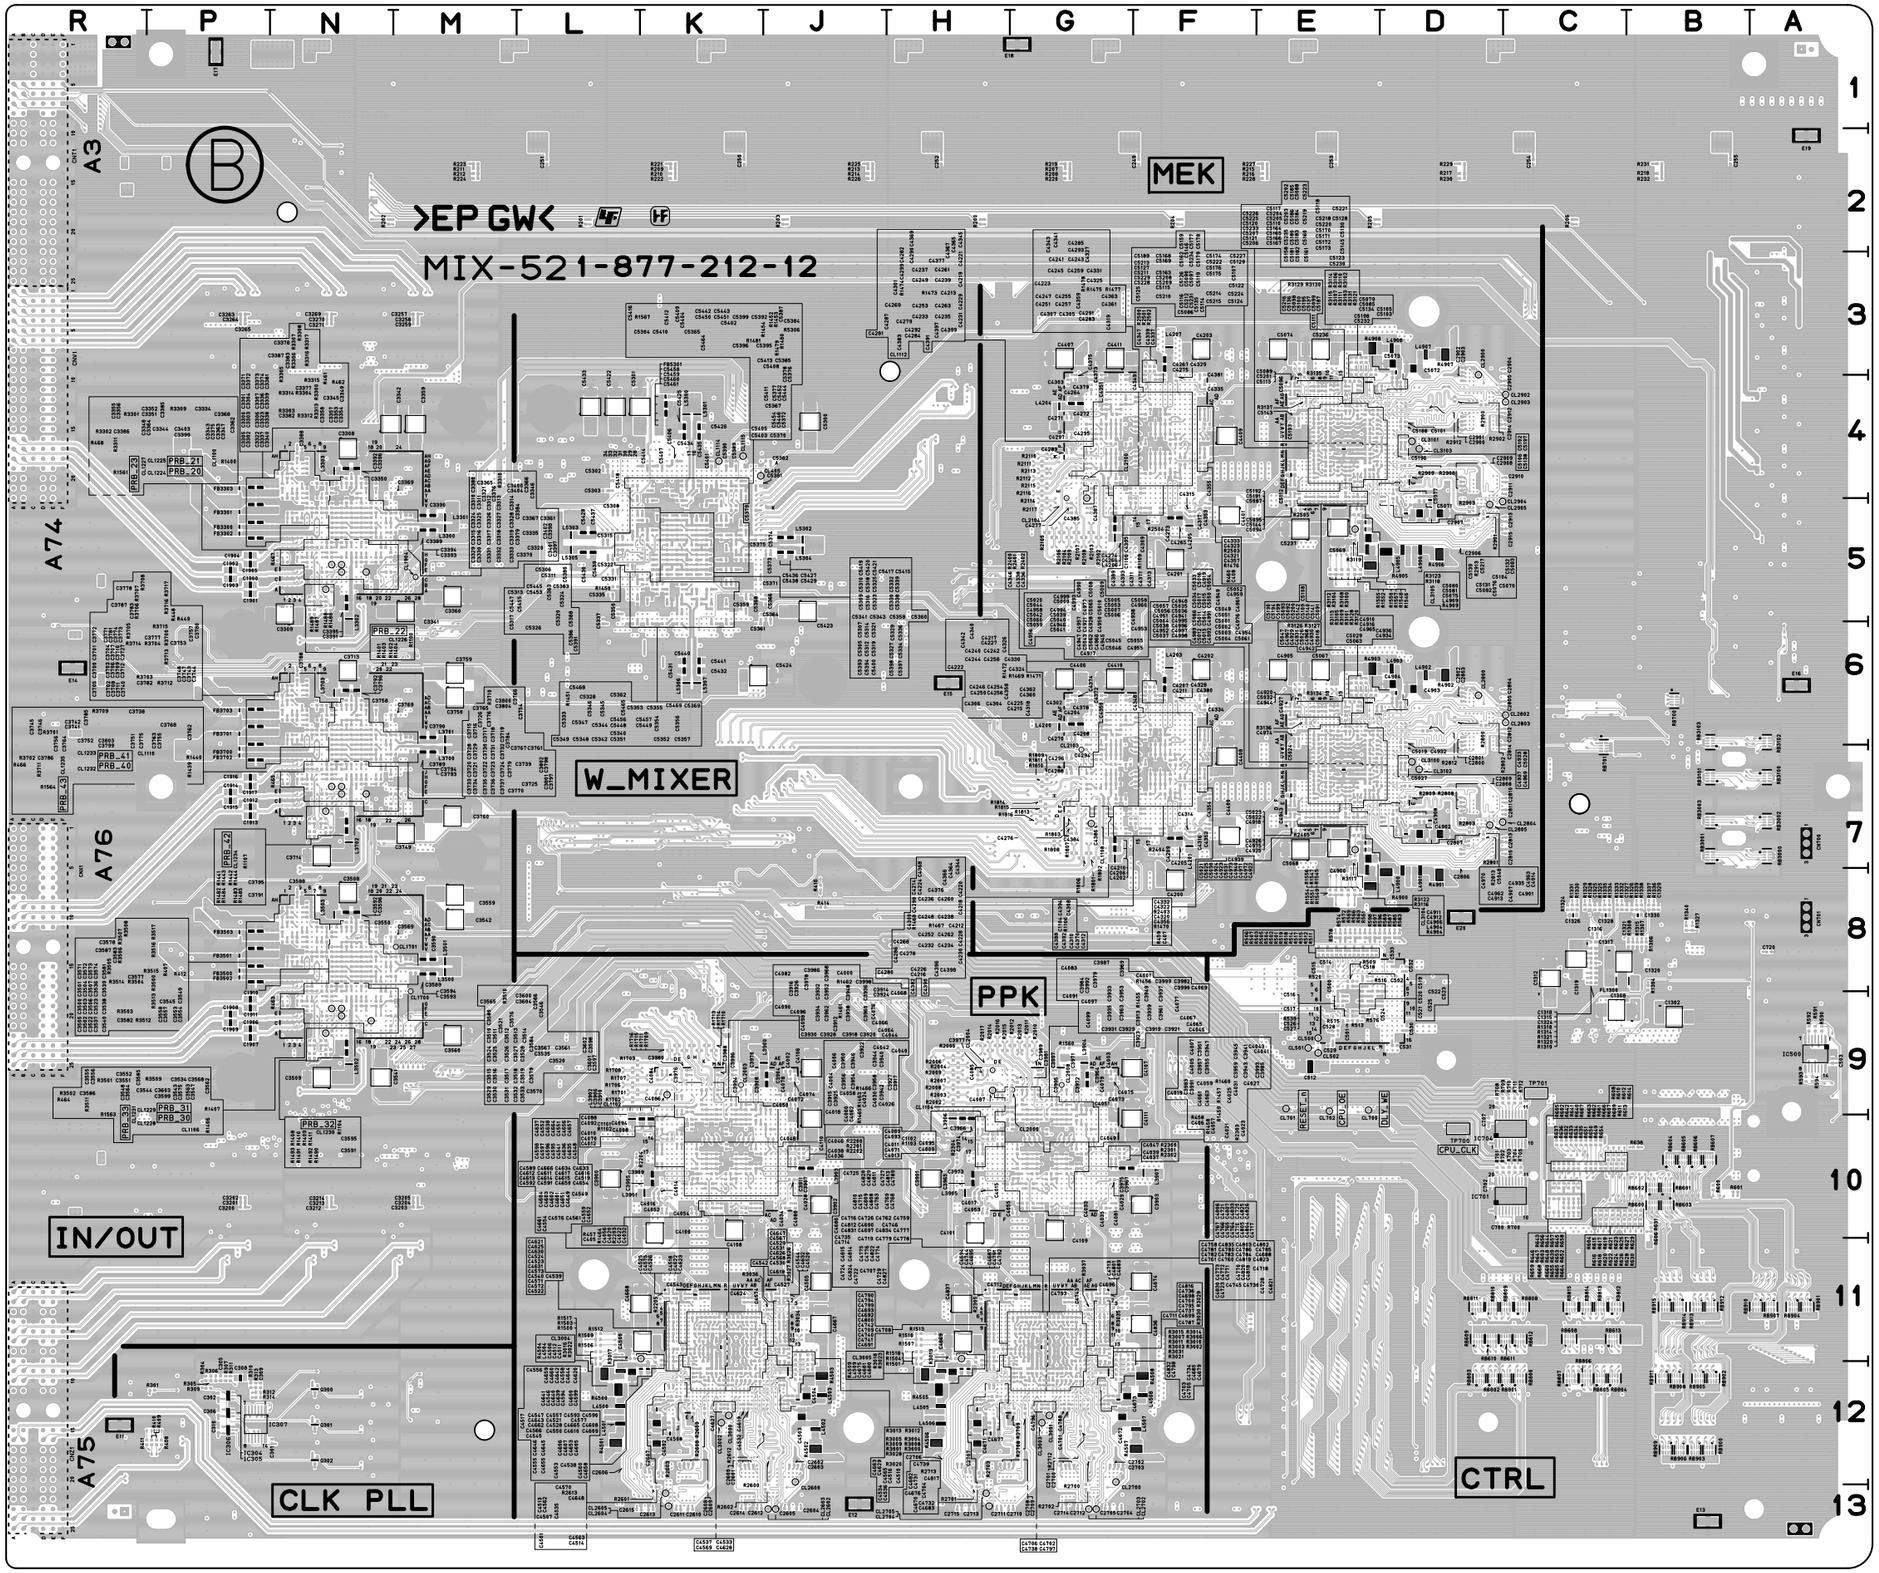

MIX-52 -B SIDE-
SUFFIX: -12


MY-114 (1-871-701-11)
---
*:B SIDE

C200	G1	C522	N9	C672	P10	C792	*C8	C921	*D8	C1066	*G4	C1172	E9	C1264	*F10	C1386	E11	C1478	*D10	C1600	C12	C1692	*C11	C1814	C11	C1906	*C11	C2028	*E3	C2130	D4	C2222	D7	C2314	M13
C201	E1	C523	N9	C673	P9	C793	*D9	C922	*D8	C1067	*G4	C1173	E9	C1265	*F10	C1387	E11	C1479	*D10	C1601	D11	C1693	*C11	C1815	C11	C1907	*C11	C2029	*F4	C2131	D4	C2223	D7	C2315	M13
C202	C1	C524	N9	C674	P9	C794	*D8	C923	*D8	C1068	*G4	C1174	E9	C1266	*F10	C1388	E11	C1480	*E10	C1602	C11	C1694	*D12	C1816	B11	C1908	*C12	C2030	*F3	C2132	E4	C2224	*D4	C2316	M13
C203	K2	C525	N9	C675	P9	C795	*C9	C924	*D8	C1069	*F4	C1175	E9	C1267	*E10	C1389	E11	C1481	*E10	C1603	C11	C1695	*C12	C1817	B11	C1909	*C12	C2031	*F4	C2133	E4	C2225	*D3	C2317	M13
C204	J1	C526	N9	C676	*P9	C796	*C8	C925	*D8	C1070	*F4	C1176	E10	C1268	*E10	C1390	D11	C1482	*D11	C1604	D11	C1696	*C12	C1818	B13	C1910	*B12	C2032	*F3	C2134	E4	C2226	*E4	C2318	M13
C205	G2	C527	N9	C677	*P9	C797	*C8	C926	*D8	C1071	*G4	C1177	E10	C1269	*E11	C1391	D11	C1483	*D11	C1605	D11	C1697	*D12	C1819	B13	C1911	*B12	C2033	*E4	C2135	E4	C2227	*E3	C2319	M13
C206	E2	C528	N9	C678	P9	C798	*C8	C927	*C8	C1072	*G4	C1178	E10	C1270	*E10	C1392	E10	C1484	*D11	C1606	C10	C1698	*D12	C1820	C13	C1912	*C12	C2034	*E3	C2136	D4	C2228	*D4	C2320	L13
C207	C2	C529	N10	C679	P9	C799	*C8	C928	*C8	C1073	*F4	C1179	E10	C1271	*E10	C1393	D12	C1485	*D11	C1607	C10	C1699	*D12	C1821	C13	C1913	*C12	C2035	*E4	C2137	D4	C2229	*D4	C2321	L13
C208	K1	C530	N10	C700	*J9	C800	*C8	C929	*C8	C1074	*F4	C1180	E10	C1272	*E10	C1394	D12	C1486	*D11	C1608	C10	C1700	*D12	C1822	C13	C1914	*C12	C2036	E7	C2138	E3	C2230	*D4	C2322	L13
C209	J2	C531	N10	C701	K9	C801	*C8	C930	*C8	C1075	*G5	C1181	E10	C1273	*E10	C1395	E12	C1487	*D11	C1609	C10	C1701	*C12	C1823	C13	C1915	*C12	C2037	E7	C2139	D5	C2231	*D4	C2323	*L12
C210	G1	C532	N10	C710	*F8	C802	*C8	C931	*C8	C1076	*G5	C1182	E10	C1274	*E10	C1396	E12	C1488	*E11	C1610	C12	C1702	*C12	C1824	B13	C1916	*C13	C2038	E7	C2140	D5	C2232	*D4	C2324	M12
C211	E1	C533	N10	C711	*E8	C803	*C8	C932	*C8	C1077	*G5	C1183	E10	C1275	*E10	C1397	E12	C1489	*E11	C1611	C12	C1703	*D13	C1825	B13	C1917	*C13	C2039	E7	C2141	E5	C2233	*D4	C2325	*L12
C212	C1	C534	N10	C712	*E9	C804	*C9	C933	*C8	C1078	*F5	C1184	E11	C1276	*E10	C1398	E12	C1490	*E11	C1612	D12	C1704	*C11	C1826	C12	C1918	*B13	C2040	E7	C2142	E5	C2234	*E4	C2400	*R13
C213	K1	C535	N10	C713	*E8	C805	*C8	C934	*C8	C1079	*F5	C1185	E11	C1277	*E10	C1399	D12	C1491	*E11	C1613	D12	C1705	*C11	C1827	*B9	C1919	*B13	C2041	E7	C2143	E5	C2235	*E4	C2500	*M11
C214	H1	C536	M10	C714	*E8	C806	*C9	C935	*C8	C1080	*G5	C1186	F11	C1278	*E10	C1400	D12	C1492	*D11	C1614	C11	C1706	*D11	C1828	*B9	C1950	E4	C2042	E7	C2144	E5	C2236	*E4	C2501	*M11
C215	G2	C537	N10	C715	*E8	C807	*C8	C936	*C8	C1081	*F5	C1187	F11	C1279	*E10	C1401	E11	C1493	*D11	C1615	C11	C1707	*D11	C1829	*C9	C1951	E4	C2043	E7	C2145	D5	C2237	*E4	C2600	*N6
C216	E2	C538	M10	C716	*F8	C808	*C9	C937	*C8	C1082	*F5	C1188	F11	C1280	*E10	C1402	D11	C1494	*E12	C1616	C11	C1708	*C12	C1830	*C9	C1952	F4	C2044	*E4	C2146	D5	C2238	*D4	C2601	*N7
C217	C2	C539	M10	C717	*F8	C809	*C8	C938	*C8	C1083	*G5	C1189	F11	C1281	*E10	C1403	D11	C1495	*D12	C1617	C11	C1709	*C12	C1831	*C9	C1953	F4	C2045	*E3	C2147	E4	C2239	*D4	C2602	*N6
C218	K2	C540	M10	C718	*F8	C810	*C9	C939	*C8	C1084	*G6	C1190	E11	C1282	*E11	C1404	E11	C1496	*D12	C1618	C13	C1710	*C12	C1832	*C9	C1954	F4	C2046	*E4	C2148	D4	C2240	*E5	C2603	A9
C219	H2	C541	M10	C719	*F8	C811	*C8	C940	*C8	C1085	*G6	C1191	E11	C1283	*E11	C1405	E11	C1497	*E12	C1619	C13	C1711	*C12	C1833	*B9	C1955	F4	C2047	*E3	C2149	D4	C2241	*D5	C2605	*P7
C220	G1	C600	*P10	C720	*E9	C820	*J9	C941	*C8	C1086	*G7	C1192	E10	C1284	*E11	C1406	D10	C1498	*E12	C1620	D13	C1712	*C12	C1834	*B9	C1956	E4	C2048	*E4	C2150	E4	C2242	*D5	C2606	*P7
C221	E1	C601	*P10	C721	*E8	C850	*F8	C942	*C8	C1087	*G7	C1193	E12	C1285	*E11	C1407	D10	C1499	*E12	C1621	D13	C1713	*C12	C1835	*C9	C1957	E4	C2049	*E4	C2151	E4	C2243	*E5	C2607	*P7
C222	C1	C602	P10	C722	*E8	C851	*E8	C943	*C8	C1089	*G6	C1194	E12	C1286	*E11	C1408	D10	C1500	*E12	C1622	D13	C1714	*D12	C1836	C13	C1958	E3	C2050	*E4	C2152	D3	C2244	*E5	C2608	*P7
C223	K1	C603	P10	C723	*E8	C852	*F8	C944	*C8	C1090	*G6	C1195	F12	C1287	*E11	C1409	D10	C1501	*D12	C1623	D13	C1715	*D12	C1837	C13	C1959	E5	C2051	*E4	C2153	D3	C2245	*E5	C2609	*P7
C224	H1	C604	*P10	C724	*E8	C853	*F8	C945	*C8	C1091	*F6	C1196	F12	C1288	*F11	C1410	D12	C1502	*D12	C1624	C13	C1716	*C13	C1838	C13	C1960	E5	C2052	*E4	C2154	D3	C2246	*E5	C2610	*P7
C225	G2	C605	*P10	C725	*E8	C854	*F8	C946	*C8	C1092	*F6	C1197	F12	C1289	*F11	C1411	D12	C1503	*E13	C1625	C13	C1717	*C13	C1839	C13	C1961	F5	C2053	*E4	C2155	D3	C2247	*D5	C2611	*P7
C226	E2	C606	P10	C726	*E8	C855	*F8	C947	*C8	C1093	*G6	C1198	F12	C1290	*F11	C1412	E12	C1504	*D11	C1626	D12	C1718	*C13	C1840	C12	C1962	F5	C2054	*F4	C2156	D5	C2248	*D5	C2612	*P7
C227	C2	C607	P10	C727	*E8	C856	*F8	C948	*C8	C1094	*F6	C1199	E12	C1291	*F11	C1413	E12	C1505	*D11	C1627	*C9	C1719	*C13	C1841	C12	C1963	F5	C2055	*F4	C2157	D5	C2249	*E6	C2613	*P7
C228	K2	C608	*P10	C728	*F9	C857	*F8	C949	*C8	C1095	*F6	C1200	E12	C1292	*E11	C1414	D11	C1506	*E11	C1628	*C9	C1750	B9	C1842	B12	C1964	F5	C2056	*F4	C2158	E5	C2250	*D4	C2614	*N6
C229	H2	C609	*P11	C729	*F8	C858	*E8	C950	*C8	C1096	G6	C1201	E11	C1293	*E11	C1415	D11	C1507	*E11	C1629	*D9	C1751	B9	C1843	B12	C1965	E5	C2057	*F4	C2159	E5	C2251	*D4	C2615	*N7
C230	*G3	C610	*P10	C730	*F9	C859	*E8	C951	*C8	C1098	*G7	C1202	E11	C1294	*E12	C1416	D11	C1508	*D12	C1630	*D9	C1752	C9	C1844	*C9	C1966	E5	C2058	*E4	C2160	D4	C2252	*E4	C2616	*N7
C231	*E3	C611	P10	C731	*F8	C860	*E8	C960	J8	C1099	*G7	C1203	E11	C1295	*E12	C1417	D11	C1509	*D12	C1631	*D9	C1753	C9	C1845	*C9	C1967	E4	C2059	*E4	C2161	D4	C2253	*E4	C2617	*N7
C232	*C3	C612	*P10	C732	*F9	C861	*E8	C1001	*G9	C1100	*G7	C1204	E11	C1296	*E12	C1418	D13	C1510	*D12	C1632	*D9	C1754	C9	C1846	*C9	C1968	E4	C2060	*E5	C2162	D4	C2254	*D5	C2618	*N7
C233	*K3	C613	P10	C733	*F8	C862	*E8	C1002	*G9	C1101	*F7	C1205	E11	C1297	*F12	C1419	D13	C1511	*D12	C1633	*C9	C1755	C9	C1847	*C9	C1969	E4	C2061	*E5	C2163	D4	C2255	*D5	C2619	*N7
C234	*H3	C614	*P11	C734	*F9	C863	*E8	C1003	*G9	C1102	*F7	C1206	E10	C1298	*F12	C1420	E13	C1512	*D12	C1634	*C9	C1756	B9	C1848	*C9	C1970	E4	C2062	*E5	C2164	D6	C2256	*D5	C2620	*N7
C235	E2	C615	*P10	C735	*F8	C864	*E8	C1004	*G9	C1103	*G7	C1207	E10	C1299	*E12	C1421	E13	C1513	*D12	C1635	*D9	C1757	B9	C1849	*C9	C1971	E4	C2063	*F5	C2165	D6	C2257	*D5	C2621	*N7
C236	C2	C616	P10	C736	*E9	C865	*E8	C1005	*F9	C1104	*F7	C1208	E10	C1300	*E12	C1422	E13	C1514	*E12	C1636	C13	C1758	C9	C1850	*B9	C1972	E3	C2064	*F5	C2166	E6	C2258	*D5	C2622	*N6
C237	B2	C617	*P10	C737	*E8	C866	*E8	C1006	G10	C1105	G7	C1209	E10	C1301	*E12	C1423	E13	C1515	*E12	C1637	C13	C1759	B10	C1851	*B9	C1973	E3	C2065	*F5	C2167	E6	C2259	*D5	C2623	*N7
C238	J2	C618	P10	C738	*E9	C867	*E8	C1008	*G10	C1106	*F6	C1210	E12	C1302	*E12	C1424	D13	C1516	*D13	C1638	D13	C1760	B10	C1852	*B10	C1974	E3	C2066	*F5	C2168	E6	C2260	*E5	C2624	*N6
C239	G2	C619	*P10	C739	*E8	C868	*F8	C1009	*G10	C1107	*G6	C1211	E12	C1303	*E13	C1425	D13	C1517	*D13	C1639	D13	C1761	C10	C1853	*B10	C1975	E3	C2067	*E5	C2169	E6	C2261	*E5	C2625	*N6
C240	*E2	C620	*P10	C740	*E9	C869	*F8	C1010	*G10	C1108	*G6	C1212	E12	C1304	*E11	C1426	E12	C1518	*D13	C1640	C12	C1762	C10	C1854	*C10	C1976	E5	C2068	*E5	C2170	D6	C2262	*D6	C2626	*N7
C241	*C2	C621	*P10	C741	*E8	C870	*F8	C1011	*G10	C1109	*F7	C1213	E12	C1305	*E11	C1427	*D9	C1519	*D13	C1641	C12	C1763	C10	C1855	*C10	C1977	E5	C2069	*E6	C2171	D6	C2263	*D6	C2627	*N7
C242	*A2	C622	*P10	C742	*E9	C871	*F8	C1012	*F10	C1110	*F7	C1214	E11	C1306	*E11	C1428	*D9	C1550	C9	C1642	C12	C1764	C10	C1856	*C10	C1978	E5	C2070	*E4	C2172	E5	C2264	*D6	C2628	*N7
C243	*J2	C623	*P10	C743	*E8	C872	*F8	C1013	G11	C1111	*G7	C1215	E11	C1307	*E11	C1429	*E9	C1551	C9	C1643	C12	C1765	B10	C1857	*C10	C1979	E5	C2071	*E4	C2173	D6	C2265	*D6	C2629	*N6
C244	*G2	C624	P10	C744	*D9	C873	*F8	C1014	*G9	C1113	*G9	C1216	E11	C1308	*E12	C1430	*E9	C1552	D9	C1644	*C9	C1766	B10	C1858	*B10	C1980	E4	C2072	*E4	C2174	D7	C2266	*D6	C2630	*N6
C245	R1	C625	P10	C745	*D8	C874	*E8	C1015	*F9	C1114	*G9	C1217	E11	C1309	*E12	C1431	*E9	C1553	D9	C1645	*C9	C1767	C10	C1859	*B10	C1981	E4	C2073	*E4	C2175	E6	C2267	*D6	C2631	*N7
C246	A8	C626	P10	C746	*D8	C875	*E8	C1016	*G10	C1115	*F9	C1218	E13	C1310	*E12	C1432	*E9	C1554	D9	C1646	*D9	C1768	C9	C1860	*C10	C1982	E4	C2074	*E5	C2176	E7	C2268	*E6	C2632	*N7
C247	P2	C627	P10	C747	*D8	C876	*E8	C1017	*F9	C1116	G9	C1219	E13	C1311	*E12	C1433	*D9	C1555	D9	C1647	*D9	C1769	C9	C1861	*B10	C1983	E4	C2075	*E5	C2177	E6	C2269	*E6	C2633	*N7
C248	A8	C628	*P10	C748	*D8	C877	*E8	C1018	*G10	C1118	*F8	C1220	F13	C1312	*E12	C1434	*D9	C1556	C9	C1648	*C9	C1770	C9	C1862	*B10	C1984	E6	C2076	*E5	C2178	E7	C2270	*E6	C2634	*N7
C249	A8	C629	*P10	C749	*D8	C878	*E8	C1019	*F10	C1119	*G8	C1221	F13	C1313	*E12	C1435	*E9	C1557	C9	C1649	*C9	C1771	C9	C1863	*C10	C1985	E6	C2077	*E5	C2179	D6	C2271	*E6	C2700	*J5
C250	A8	C630	*P10	C750	*E8	C879	*E8	C1020	*F10	C1120	*G8	C1222	F13	C1314	*F12	C1436	D13	C1558	D9	C1650	*C9	C1772	C9	C1864	*C10	C1986	F6	C2078	*E5	C2180	D7	C2272	*D6	C2701	*H5
C273	A8	C631	*P10	C751	*E8	C880	*E8	C1021	*G10	C1121	G7	C1223	F13	C1315	*F12	C1437	D13	C1559	C10	C1651	*C9	C1773	C9	C1865	*C10	C1987	F6	C2079	*E5	C2181	E6	C2273	*D6	C2702	*J5
C300	A3	C632	P10	C752	*E8	C881	*E8	C1022	*F10	C1122	*G8	C1224	E13	C1316	*E13	C1438	E13	C1560	C10	C1652	*C10	C1774	B9	C1866	*C10	C1988	F6	C2080	*E5	C2182	D6	C2274	*E7	C2703	*H5
C301	A2	C633	P10	C753	*D9	C882	*E8	C1023	*F10	C1123	*G8	C1225	E13	C1317	*E13	C1439	E13	C1561	D10	C1653	*C10	C1775	B9	C1867	*B10	C1989	F6	C2081	*E5	C2183	D6	C2275	*D7	C2704	*J5
C302	A2	C634	P10	C754	*D8	C883	*E8	C1024	*G10	C1124	*G8	C1226	E12	C1318	*E13	C1440	D12	C1562	D10	C1654	*D10	C1776	C10	C1868	*B10	C1990	E6	C2082	*E6	C2184	E6	C2276	*D7	C2705	*H5
C400	R5	C635	P10	C755	*D9	C884	*E8	C1025	*G10	C1125	*F8	C1227	*E9	C1319	*E13	C1441	D12	C1563	D10	C1655	*D10	C1777	C10	C1869	*C11	C1991	E6	C2083	*E6	C2185	E6	C2277	*E7	C2706	*J5
C401	R5	C636	*P10	C756	*D8	C885	*E8	C1026	*F10	C1126	*F8	C1228	*E9	C1350	D9	C1442	D12	C1564	D10	C1656	*D10	C1778	C10	C1870	*C10	C1992	E5	C2084	*E6	C2186	D5	C2278	*E7	C2707	*H5
C402	P5	C637	*P10	C757	*E9	C886	*E8	C1027	*F10	C1127	*G9	C1229	*F9	C1351	D9	C1443	D12	C1565	C10	C1657	*D10	C1779	C10	C1871	*C10	C1993	E6	C2085	*E6	C2187	D5	C2279	*E7	C2708	*J5
C403	P6	C638	*P11	C758	*E8	C887	*E8	C1029	*G11	C1128	*G9	C1230	*F9	C1352	E9	C1444	*D9	C1566	C10	C1658	*C10	C1780	C10	C1872	*C10	C1994	E7	C2086	*E6	C2188	D5	C2280	*E7	C2709	*H5
C404	P6	C639	*P11	C759	*E9	C888	*D8	C1030	*G11	C1129	*F9	C1231	*F9	C1353	E9	C1445	*D9	C1567	D10	C1659	*C10	C1781	C10	C1873	*C10	C1995	F6	C2087	*E6	C2189	D5	C2281	*D7	C2710	*J5
C405	P6	C640	P11	C760	*E8	C889	*D8	C1031	*F11	C1130	*F9	C1232	*F9	C1354	E9	C1446	*E9	C1568	C9	C1660	*D10	C1782	B10	C1874	*C10	C1996	F7	C2088	*F6	C2190	D6	C2282	*D7	C2711	*H5
C406	P6	C641	P11	C761	*C8	C890	*D8	C1032	G12	C1131	*F8	C1233	*E9	C1355	E9	C1447	*E9	C1569	C9	C1661	*C10	C1783	B10	C1875	*C10	C1997	F6	C2089	*F6	C2191	D7	C2283	*E7	C2712	*J5
C407	R5	C642	*P11	C762	*D9	C891	*D8	C1034	*G12	C1132	*F8	C1234	*E9	C1356	D9	C1448	*D9	C1570	D9	C1662	*C10	C1784	B11	C1876	*B10	C1998	F7	C2090	*F6	C2192	E6	C2284	*D6	C2713	*H5
C408	R5	C643	*P11	C763	*D8	C892	*D8	C1035	*G12	C1133	*G8	C1235	*E9	C1357	D9	C1449	*D9	C1571	D9	C1663	*D10	C1785	B11	C1877	*B10	C1999	E6	C2091	*F6	C2193	E7	C2285	*D6	C2714	*J5
C409	R5	C644	P11	C764	*D8	C893	*E8	C1036	*F12	C1134	*G8	C1236	E13	C1358	E9	C1450	*D9	C1572	C9	C1664	*D10	C1786	C11	C1878	*C10	C2000	E7	C2092	*E6	C2194	D6	C2286	*E6	C2715	*H5
C410	R6	C645	P11	C765	*D8	C894	*E8	C1037	G12	C1135	*G8	C1237	E13	C1359	D10	C1451	*D9	C1573	C9	C1665	*D10	C1787	C11	C1879	*C10	C2001	E6	C2093	*E6	C2195	D6	C2287	*E6	C2716	*M11
C411	R6	C646	P11	C766	*D8	C895	*D8	C1038	*G11	C1136	*F8	C1238	E13	C1360	D10	C1452	*D10	C1574	C9	C1666	*D10	C1788	C11	C1880	*C10	C2002	E6	C2094	*E7	C2196	D6	C2288	*D7	C2717	*M11
C412	R6	C647	*P11	C767	*D8	C896	*D8	C1039	*G11	C1137	*F8	C1239	E13	C1361	E10	C1453	*D10	C1575	C9	C1667	*C10	C1789	C11	C1881	*C10	C2003	E6	C2095	*E7	C2197	D6	C2289	*D7	C2718	*M12
C413	R7	C648	P11	C768	*D8	C897	*D8	C1040	*F11	C1138	*G8	C1240	E12	C1362	E10	C1454	*E10	C1576	C10	C1668	*C10	C1790	B11	C1882	*C11	C2004	E6	C2096	*E7	C2198	D7	C2290	*D7	C2719	*M11
C414	R7	C649	*P10	C769	*D8	C898	*D8	C1041	*F11	C1139	*G8	C1241	E12	C1363	E10	C1455	*E10	C1577	C10	C1669	*D11	C1791	B11	C1883	*C11	C2005	E6	C2097	*F7	C2199	D7	C2291	*D7	C2720	*M12
C500	R8	C650	P10	C770	*D8	C899	*D8	C1042	*F11	C1150	E9	C1242	E12	C1364	E10	C1456	*E10	C1578	D10	C1670	*C10	C1792	C10	C1884	*B11	C2006	E5	C2098	*F7	C2200	E7	C2292	*D7	C2721	*M12
C501	R8	C651	P11	C771	*C9	C900	*D8	C1043	*F11	C1151	E9	C1243	E12	C1365	D10	C1457	*E10	C1579	D10	C1671	*C10	C1793	B12	C1885	*B11	C2007	E5	C2099	*F7	C2201	E7	C2293	*D7	C2722	*M12
C502	R7	C652	*P11	C772	*C8	C901	*C8	C1044	*G11	C1152	F9	C1244	*E9	C1366	D10	C1458	*D10	C1580	C10	C1672	*D10	C1794	B12	C1886	*B11	C2008	E5	C2100	*F7	C2202	E7	C2294	*E7	C2723	*M12
C503	R7	C653	P11	C773	*C8	C902	*D8	C1045	*G11	C1153	F9	C1245	*E9	C1367	E10	C1459	*D10	C1581	C10	C1673	*D10	C1795	C12	C1887	*B11	C2009	E5	C2101	*E7	C2203	E7	C2295	*E7	C2724	*N12
C504	*R8	C654	*P9	C774	*C8	C903	*D8	C1046	*G12	C1154	F9	C1246	*E9	C1368	D9	C1460	*E10	C1582	C10	C1674	*C10	C1796	C12	C1888	*C11	C2010	E6	C2102	*E7	C2204	D7	C2296	*D7	C2725	*N11
C505	*R8	C655	P10	C775	*C8	C904	*D8	C1047	*G12	C1155	F9	C1247	*E9	C1369	D9	C1461	*D10	C1583	C10	C1675	*C10	C1797	C12	C1889	*C11	C2011	E7	C2103	*E7	C2205	D7	C2297	*D7	C2726	*N12
C506	*R9	C656	P11	C776	*C8	C905	*D8	C1048	*G12	C1156	E9	C1248	*E9	C1370	E9	C1462	*D10	C1584	C11	C1676	*C10	C1798	C12	C1890	*C11	C2012	E6	C2104	*E6	C2206	E7	C2298	*D7	C2727	*M12
C507	*R9	C657	P11	C777	*D8	C906	*D8	C1049	*F12	C1157	E9	C1249	*E9	C1371	E9	C1463	*E10	C1585	C11	C1677	*C10	C1799	B12	C1891	*C11	C2013	E7	C2105	*E6	C2207	*D4	C2299	*D7	C2728	*N12
C508	R8	C658	P10	C778	*D8	C907	*D8	C1050	*F12	C1158	E9	C1250	*E9	C1372	D9	C1464	*E10	C1586	D11	C1678	*C10	C1800	B12	C1892	*B11	C2014	E6	C2106	*E6	C2208	*D3	C2300	P13	C2729	*M11
C509	R8	C659	P10	C779	*D9	C908	*D8	C1051	*F12	C1159	E10	C1251	*E9	C1373	D9	C1465	*E10	C1587	D11	C1679	*C10	C1801	C11	C1893	*B11	C2015	E6	C2107	*E6	C2209	*E4	C2301	*L12	C2730	*M12
C510	*R8	C660	*P11	C780	*D8	C909	*D8	C1052	*F12	C1160	E10	C1252	*E10	C1374	D9	C1466	*E10	C1588	D11	C1680	*D10	C1802	C11	C1894	*C12	C2016	E6	C2108	*E7	C2210	*E3	C2302	*L12	C2731	*M12
C511	*R8	C661	*P11	C781	*D9	C910	*D8	C1053	*G12	C1161	F10	C1253	*E10	C1375	D9	C1467	*D10	C1589	D11	C1681	*D10	C1803	C11	C1895	*B12	C2017	E6	C2109	*E7	C2211	*E4	C2303	*N13	C2800	*H5
C512	R9	C662	*P11	C782	*D8	C911	*C8	C1054	*G11	C1162	F10	C1254	*F10	C1376	D10	C1468	*D10	C1590	C11	C1682	*C11	C1804	C11	C1896	*B12	C2018	E7	C2110	*E7	C2212	*E3	C2304	*N13	C2801	*H5
C513	R9	C663	*P11	C783	*D9	C912	*C8	C1055	*G12	C1163	F10	C1255	*F10	C1377	D10	C1469	*E11	C1591	C11	C1683	*C11	C1805	C11	C1897	*C12	C2019	E7	C2111	*E7	C2213	*D4	C2305	M13	C2802	*H5
C514	R8	C664	P11	C784	*D8	C913	*C8	C1057	*G4	C1164	F10	C1256	*F10	C1378	E10	C1470	*D10	C1592	D10	C1684	*C11	C1806	C10	C1898	*C12	C2020	F7	C2112	*E7	C2214	*D3	C2306	N13	C2803	*H5
C515	R8	C665	P11	C785	*D9	C914	*C8	C1058	*G4	C1165	E10	C1257	*F10	C1379	E10	C1471	*D10	C1593	C12	C1685	*C11	C1807	C10	C1899	*C12	C2021	F7	C2113	*E7	C2215	*E4	C2307	*M12	C2804	*H5
C516	R9	C666	P11	C786	*D8	C915	*C8	C1059	*F4	C1166	E10	C1258	*E10	C1380	D10	C1472	*E10	C1594	C12	C1686	*C11	C1808	B10	C1900	*C12	C2022	F7	C2114	*E7	C2216	D7	C2308	N12	C2805	*H5
C517	R9	C667	P11	C787	*C9	C916	*C8	C1060	G4	C1167	E10	C1259	*E10	C1381	D10	C1473	*E10	C1595	D12	C1687	*C11	C1809	B10	C1901	*B12	C2023	F7	C2115	*E7	C2217	D7	C2309	N12	C2806	*H5
C518	N9	C668	*P9	C788	*C8	C917	*C8	C1062	*G5	C1168	E9	C1260	*E10	C1382	D10	C1474	*D10	C1596	D12	C1688	*D11	C1810	C12	C1902	*B12	C2024	E7	C2116	*E7	C2218	E7	C2310	*M12	C2807	*H5
C519	N9	C669	*P9	C789	*C9	C918	*C8	C1063	*G5	C1169	E9	C1261	*E10	C1383	D10	C1475	*D10	C1597	D12	C1689	*D11	C1811	C12	C1903	*C13	C2025	E7	C2117	*E7	C2219	E7	C2311	M13	C2808	*H6
C520	N9	C670	*P9	C790	*C8	C919	*D8	C1064	*F5	C1170	E9	C1262	*E10	C1384	D11	C1476	*D10	C1598	D12	C1690	*D11	C1812	C12	C1904	*C11	C2026	E7	C2118	*E7	C2220	D7	C2312	M13	C2809	*H5
C521	N9	C671	*P10	C791	*C9	C920	*D8	C1065	G5	C1171	E9	C1263	*F10	C1385	D11	C1477	*D10	C1599	C12	C1691	*D11	C1813	C12	C1905	*C11	C2027	*E4	C2119	*E7	C2221	D7	C2313	L13	C2810	*H6


C2811 *H5 C3127 *R11 C3920 *P4 C4264 *N9 C4489 *J9 C4581 *H8 C4727 *L11 C5009 C5 C5101 *C4 C5223 C3 C5315 *C5 CL1106 E7 FB1201 *G9 IC1410 *E12 IC3101 R12 Q200 *K2 R402 R5 R617 *P10
C2812 *H6 C3128 *P12 C3921 *P4 C4265 *N9 C4490 *J9 C4582 *J10 C4728 *K11 C5010 C5 C5102 *C4 C5224 B3 C5316 *C5 CL1107 E7 FB1202 *G10 IC1501 D9 IC3102 P12 Q201 *L2 R403 R7 R618 P10
C2813 *H5 C3129 *R12 C3922 R4 C4266 *N9 C4491 *J9 C4583 *H9 C4729 *K11 C5011 D5 C5103 *C4 C5225 B3 C5317 *B5 CL1108 D7 FB1203 *G11 IC1502 D10 IC3103 R11 Q202 *K2 R404 R5 R619 *P10
C2814 *H6 C3130 *P12 C3923 R4 C4267 *N9 C4492 *J8 C4584 *K8 C4730 *K11 C5012 D5 C5104 *D4 C5226 C5 C5318 *B5 CL1109 C7 FB1204 *G12 IC1503 D11 IC3200 K8 Q203 *K2 R500 R8 R620 P10
C2815 *H5 C3131 *R11 C3924 R4 C4268 *N9 C4493 *J8 C4585 H8 C4731 *K11 C5013 D5 C5105 *D4 C5227 C5 C5319 *C6 CL1110 C7 FB1205 *G4 IC1504 D11 IC3201 M7 Q204 *K2 R501 R8 R621 *P10
C2816 *M11 C3201 K9 C3925 R4 C4269 *N9 C4494 *J8 C4601 *B9 C4732 *K11 C5014 D5 C5106 *D4 C5228 C5 C5320 *C4 CL1111 C7 FB1206 *G5 IC1505 D12 IC3202 N8 Q205 *K2 R502 R7 R622 *P10
C2817 *N11 C3202 K9 C3926 R4 C4270 *N9 C4495 *J9 C4602 *B9 C4733 *K11 C5015 C5 C5107 *D4 C5229 C5 C5321 *C4 CL1112 D7 FB1207 *G6 IC1506 *D9 IC3203 N7 Q300 *A5 R503 R7 R623 P10
C2818 *M11 C3203 K9 C3927 R4 C4271 *N9 C4496 *J8 C4603 *B9 C4734 *K11 C5016 C5 C5108 *C4 C5230 C4 C5322 *C4 CL1113 C7 FB1208 *G7 IC1507 *D10 IC3300 L6 Q301 *A5 R504 *R8 R624 *P10
C2819 *N11 C3204 K9 C3928 *R4 C4272 *N9 C4497 *J9 C4604 *B9 C4735 *K11 C5017 D4 C5109 *C4 C5231 C4 C5323 *C4 CL2100 L10 FB1209 *G9 IC1508 *D11 IC3301 K6 Q302 *A5 R505 *R8 R625 P10
C2820 *M11 C3205 M7 C3929 *P4 C4273 *N9 C4498 *J9 C4605 *B9 C4736 *L11 C5018 C4 C5110 *D5 C5232 B4 C5324 *C5 CL2101 K10 FB1210 *F8 IC1509 *D12 IC3302 *L6 Q303 *A5 R506 *R8 R626 *P10
C2821 *N11 C3206 M7 C3930 *P4 C4274 *N9 C4499 *J9 C4606 *B10 C4737 *L11 C5019 C4 C5111 *C5 C5233 B4 C5325 *C5 CL2102 K10 FB3800 *M1 IC1510 *D12 IC3303 *K6 Q304 *A4 R507 *R8 R627 *P10
C2822 *M11 C3207 N8 C3931 *N4 C4275 *N9 C4500 *J9 C4607 *B10 C4738 *K12 C5020 D4 C5112 *C5 C5234 B6 C5326 *B5 CL2300 P13 FB3900 *R5 IC1601 C9 IC3400 K4 Q305 *A4 R508 R8 R628 P10
C2823 *N11 C3208 N8 C3932 *N4 C4276 *N9 C4501 *J9 C4608 *B10 C4739 *K12 C5021 D4 C5113 *D5 C5235 B6 C5327 *B5 CL2301 N13 FB3901 *R4 IC1602 C10 IC3401 *L4 Q306 *A4 R509 R8 R629 *P10
C2824 *N11 C3209 N8 C3933 *P4 C4277 *N9 C4502 *J9 C4609 *B10 C4740 *K12 C5022 C3 C5114 *D5 C5236 C6 C5328 *C5 CL2302 M12 FB3902 *R5 IC1603 C11 IC3402 *K4 Q307 *A4 R510 R7 R630 P10
C2825 *N11 C3210 N7 C3934 *P4 C4278 *N9 C4503 *J8 C4610 *B10 C4741 *K12 C5023 C3 C5115 *D5 C5237 C6 C5329 *C5 CL2400 M10 FB4200 *R6 IC1604 C11 IC3403 L4 Q308 *A4 R511 R7 R631 *P11
C2826 *N11 C3211 N7 C3935 *N5 C4279 *N9 C4504 *J8 C4611 *B10 C4742 *K11 C5024 C3 C5116 *D5 C5238 C6 C5330 *C5 CL2401 M7 FB4201 *R6 IC1605 C12 IC3500 A6 Q309 *A4 R512 *R8 R632 *P10
C2827 *N11 C3212 *K9 C3936 *P5 C4280 *N9 C4505 *J8 C4612 *B11 C4743 *K11 C5025 C3 C5117 *C5 C5239 C6 C5331 *C5 CL4200 M10 FB4202 *R6 IC1606 *C9 IC3501 A6 Q2300 *L13 R513 *R8 R633 P10
C2828 *M11 C3300 L5 C3937 *P5 C4281 *N9 C4506 *K8 C4613 *B11 C4744 *K11 C5026 C5 C5118 *C5 C5240 B6 C5332 *C6 CL4201 M10 IC1607 *C10 IC3602 N8 Q2301 *M13 R514 *R8 R634 *P10
C2829 *N11 C3301 K5 C3938 *P5 C4282 *N9 C4507 *K8 C4614 *B11 C4745 *K11 C5027 C5 C5119 *D6 C5241 B6 C5333 *C6 CL4202 M10 HB001 *P12 IC1608 *C11 IC3605 *J4 Q2302 *M13 R515 *R8 R635 P10
C2830 *M11 C3302 L5 C3939 *P4 C4283 *N10 C4508 *K9 C4615 *B10 C4746 *L11 C5028 D5 C5120 *C4 C5242 C5 C5334 *B6 CL4203 M10 HB002 *A1 IC1609 *C12 IC3606 P13 R516 P8 R636 *P11
C2831 *N11 C3303 K5 C3940 *P4 C4284 *N9 C4509 *K9 C4616 *B11 C4747 *L12 C5029 D5 C5121 *C4 C5243 B6 C5335 *B6 CL4204 M10 HB003 *J11 IC1610 *C12 IC3607 *G4 R200 *F1 R517 R7 R637 *P10
C2900 *H6 C3304 *L6 C3941 *R5 C4285 *N9 C4510 *J9 C4617 *B11 C4748 *K11 C5030 C4 C5122 *D4 C5244 B7 C5336 *B6 CL4205 M10 HB004 B11 IC1701 F4 IC3609 A8 R201 *D1 R518 P7 R638 *P10
C2901 *H6 C3305 *K6 C3942 *P4 C4286 *N9 C4511 *J9 C4618 *B12 C4749 *K11 C5031 C4 C5123 *D4 C5245 C6 C5337 *B6 CL4206 M10 HB005 B12 IC1702 F5 IC3800 N2 R202 *B1 R519 R7 R639 *P10
C2902 *H6 C3306 *L6 C3943 *P4 C4287 *N9 C4512 *J9 C4619 *B12 C4750 *K11 C5032 C4 C5124 *C5 C5246 C7 C5338 *C6 CL4207 M10 HB006 *J12 IC1703 F5 IC3801 *N2 R203 *J1 R520 *R8 R640 *P10
C2903 *H6 C3307 *K6 C3944 R4 C4288 *N9 C4513 *J9 C4620 *B11 C4751 *K11 C5033 C4 C5125 *C5 C5247 C6 C5339 *C6 CL4208 M10 HB007 *H12 IC1704 F6 IC3802 P2 R204 *H1 R521 *P8 R641 P10
C2904 *J6 C3400 K4 C3945 R3 C4289 *L8 C4514 *J9 C4621 *B12 C4752 *K11 C5034 C6 C5126 *C5 C5248 C7 C5340 *C6 CL4209 M10 HB008 H7 IC1705 F7 IC3803 P3 R205 *F2 R522 *R8 R642 P10
C2905 *J6 C3401 *L5 C4000 *M6 C4290 *M9 C4515 *J9 C4622 *B13 C4753 *K11 C5035 C6 C5127 *C5 C5249 B6 C5341 *C6 CL4210 M10 IC1706 *F4 IC3901 P4 R206 *D2 R523 *P8 R643 P10
C2906 *H6 C3402 K4 C4100 *M3 C4291 *M9 C4516 *K8 C4623 *B12 C4754 *K11 C5036 D6 C5128 *C5 C5250 B7 C5342 *B6 CL4211 M10 IC1 N7 IC1707 *F5 IC3902 R4 R207 *B2 R524 P7 R644 P10
C2907 *H6 C3403 *L5 C4200 *L10 C4292 *M9 C4517 *K8 C4624 *B12 C4755 *K11 C5037 D6 C5129 *C5 C5251 C6 C5343 *B6 IC2 M9 IC1708 *F5 IC3903 *P5 R208 *J2 R525 R7 R645 *P10
C2908 *H6 C3404 *K5 C4201 *N8 C4293 *M9 C4518 *J9 C4625 *B12 C4756 *K11 C5038 D6 C5130 *D5 C5252 C6 C5344 *C7 CN3500 A6 IC3 J9 IC1709 *F6 IC4200 L10 R209 *H2 R526 P7 R646 *P10
C2909 *H6 C3405 L4 C4202 *L9 C4294 *N9 C4519 *J9 C4626 *B4 C4757 *K11 C5039 D6 C5131 *D5 C5253 C6 C5345 *B7 CN3600 H4 IC4 K11 IC1710 *F7 IC4300 H8 R210 *F2 R527 R7 R647 *P10
C2910 *K5 C3406 *K5 C4203 *L9 C4295 *N9 C4520 *K8 C4627 *B4 C4758 *K11 C5040 C6 C5132 *C6 C5254 C6 C5346 *B7 CN3601 A8 IC200 A8 IC1801 E4 IC4401 *B9 R211 *F2 R528 *R8 R648 *P10
C2911 *K5 C3407 L4 C4204 *M10 C4296 *M9 C4521 *K8 C4628 *B4 C4759 *K11 C5041 C6 C5133 *C6 C5255 C6 C5347 *C7 CN4001 N6 IC201 A8 IC1802 E5 IC4402 *B10 R212 *D2 R529 *P8 R649 P10
C2912 *K5 C3500 A6 C4205 *L9 C4297 *M9 C4522 *J8 C4629 *B4 C4760 *L11 C5042 D5 C5134 *C6 C5256 C5 C5348 *C7 CN4101 N3 IC400 P5 IC1803 E5 IC4403 *B10 R213 *D2 R530 *R8 R650 P10
C2913 *K5 C3501 A6 C4206 *L9 C4300 *M9 C4523 *J8 C4630 *B3 C4761 *L11 C5043 C6 C5135 *C6 C5257 C5 C5349 *C7 IC401 R6 IC1804 E6 IC4404 *B11 R214 *B2 R531 *P8 R651 P10
C2914 *K6 C3502 A6 C4207 *M10 C4301 *M9 C4524 *J9 C4631 *B4 C4762 *K11 C5044 C7 C5136 *C6 C5258 B5 C5350 *C7 CNT1 R2 IC500 R8 IC1805 E7 IC4405 *B12 R215 *B2 R532 P8 R652 P10
C2915 *K6 C3503 A6 C4208 *M9 C4304 *M9 C4525 *J9 C4632 *B4 C4763 *K11 C5045 D6 C5137 *C6 C5259 B5 C5351 *B7 CNY1 R10 IC501 *R8 IC1806 *E4 IC4406 *B3 R216 *J2 R533 P7 R653 *P10
C2916 *J5 C3600 A8 C4209 *M9 C4305 *M9 C4526 *K8 C4633 *B5 C4764 *K11 C5046 D7 C5138 *D6 C5260 C6 C5352 *B7 CNZ1 R12 IC502 R9 IC1807 *E5 IC4407 *B4 R217 *J2 R534 P7 R654 *P10
C2917 *J5 C3601 B8 C4210 *L9 C4307 *M9 C4527 *K8 C4634 *B5 C4765 *K11 C5047 D6 C5139 *D6 C5261 C7 C5353 *C7 IC503 A2 IC1808 *E5 IC4408 *B5 R218 *J2 R535 P7 R655 *P11
C2918 *J5 C3602 B8 C4211 *L9 C4309 *M9 C4528 *J8 C4635 *B4 C4766 *K11 C5048 D7 C5140 *D6 C5262 C6 C5354 *C6 D205 *L2 IC504 A2 IC1809 *E6 IC4409 *B6 R219 *H2 R536 P7 R656 *P11
C2919 *J5 C3603 N8 C4212 *M10 C4310 L10 C4529 *J8 C4636 *B5 C4767 *K11 C5049 C6 C5141 *D6 C5263 C7 C5355 *C6 D206 A3 IC505 A2 IC1810 *E7 IC4410 *B7 R220 *H2 R537 P7 R657 P11
C3000 *L6 C3604 N8 C4213 *M9 C4311 *K9 C4530 *J8 C4637 *B5 C4768 *K11 C5050 C7 C5142 *C6 C5264 C6 C5356 *C6 D207 *R1 IC600 *P10 IC1901 D4 IC4411 *B8 R221 A3 R538 P7 R658 *P11
C3001 *L7 C3605 A8 C4214 *M9 C4312 *K8 C4531 *J8 C4638 *B5 C4769 *K11 C5051 D6 C5143 *C6 C5265 C6 C5357 *C6 D300 A5 IC601 P10 IC1902 D5 IC4412 *H9 R222 A4 R539 P7 R659 P11
C3002 *L6 C3606 B8 C4215 *L9 C4313 *K9 C4532 *J8 C4639 *B6 C4770 *K12 C5052 C6 C5144 *D7 C5266 B6 C5358 *C7 D301 A5 IC602 *P10 IC1903 D5 IC4500 J11 R223 A4 R540 *P8 R660 *P10
C3003 *L7 C3607 *J4 C4216 *L9 C4314 *K9 C4533 *J8 C4640 *B5 C4771 *K12 C5053 C6 C5145 *C7 C5267 B6 C5359 *C7 D302 A4 IC603 P10 IC1904 D6 R224 A5 R541 *P8 R661 P10
C3004 *L6 C3608 P13 C4217 *M10 C4315 *K8 C4534 *J8 C4641 *B6 C4772 *K11 C5054 D6 C5146 *C7 C5268 B7 C5360 *B7 D303 A4 IC604 *P11 IC1905 D7 L500 R8 R225 A5 R542 *P8 R662 P11
C3005 *L7 C3609 N8 C4218 *M9 C4316 *K9 C4535 *J8 C4642 *B6 C4773 *K11 C5055 D6 C5147 *D7 C5269 B7 C5361 *B7 D304 A4 IC605 P11 IC1906 *D4 L501 R8 R226 *K2 R543 *P8 R663 P11
C3006 *L6 C3610 *H4 C4219 *M9 C4317 *K9 C4536 *J8 C4643 *B6 C4774 *K11 C5056 C5 C5148 *D7 C5270 C7 C5362 *C7 D2600 A9 IC606 *P11 IC1907 *D5 L502 R7 R227 *K2 R544 *P8 R664 *P11
C3007 *L7 C3800 *P2 C4220 *M9 C4318 *K8 C4537 *J8 C4644 *B6 C4775 *K11 C5057 C5 C5149 *D7 C5271 C7 C5363 *C7 D2601 A10 IC607 P11 IC1908 *D5 L503 R7 R228 A9 R545 *P8 R665 *P11
C3008 *K6 C3801 *N2 C4221 *M9 C4319 *K9 C4538 *J9 C4645 *B6 C4776 *L12 C5058 C5 C5150 *D7 C5272 C7 C5364 *C7 D2602 A9 IC608 *P9 IC1909 *D6 L504 *R8 R229 A3 R546 *P8 R666 P11
C3009 *L6 C3802 *N2 C4222 *M9 C4320 *K9 C4539 *J9 C4646 *B7 C4777 *L12 C5059 C5 C5151 *C7 C5273 C7 C5365 *C7 D2603 A9 IC609 P9 IC1910 *D7 L505 *R8 R230 A3 R547 *P8 R667 P11
C3010 *K7 C3803 *N1 C4223 *M9 C4321 *K8 C4540 *J9 C4647 *B7 C4778 *K12 C5060 C6 C5152 *C7 C5274 B7 C5366 *C7 D2604 A9 IC1001 F8 IC2001 C4 L506 *R8 R231 A3 R548 R9 R668 *P10
C3011 *L7 C3804 *N2 C4224 *M9 C4322 *K9 C4541 *J9 C4648 *B7 C4779 J11 C5061 C7 C5153 *D7 C5275 B7 C5367 *C7 D3900 R4 IC1002 E8 IC2002 C5 L507 *R8 R232 *N7 R549 R9 R669 P10
C3012 *K6 C3805 *N2 C4225 *M9 C4450 *K9 C4542 *J9 C4649 *B7 C4780 *K12 C5062 D6 C5154 *C6 C5276 C7 C5368 *B7 D3901 A7 IC1003 D8 IC2003 C5 L508 R8 R233 *R1 R550 R8 R670 P11
C3013 *L6 C3806 *N2 C4226 *M9 C4451 *H9 C4543 *J9 C4650 *B7 C4781 *K12 C5063 D7 C5155 *C6 C5277 *B4 C5369 *B7 D3902 A7 IC1005 D8 IC2004 C6 L509 R8 R234 *H2 R551 R8 R671 *P11
C3014 *K7 C3807 *N2 C4227 *M9 C4452 *J8 C4544 *K8 C4651 *B8 C4782 *K12 C5064 C6 C5156 *D6 C5278 *B3 C5400 *K11 D3903 A7 IC1006 C8 IC2005 C7 L510 R7 R300 A2 R552 R9 R672 P11
C3015 *L7 C3808 *N2 C4228 *M9 C4453 *J9 C4545 *K8 C4652 *B8 C4783 *K11 C5065 C6 C5157 *D6 C5279 *C4 C5401 *K12 D3904 A7 IC1007 C8 IC2006 *C4 L511 R7 R301 A2 R553 R9 R673 *P9
C3016 *K6 C3809 *N2 C4229 *M9 C4454 *K8 C4546 *K9 C4653 *B8 C4784 *K11 C5066 C6 C5158 *C7 C5280 *C3 C5402 *M9 IC1101 F8 IC2007 *C5 L512 *R8 R302 A2 R554 R8 R674 P10
C3017 *L6 C3810 *P2 C4230 *M9 C4455 *K9 C4547 *K9 C4654 *B8 C4785 *K11 C5067 C6 C5159 *C7 C5281 *C4 DD200 F2 IC1102 E8 IC2008 *C5 L513 *R8 R303 A2 R555 R8 R675 P11
C3018 *K7 C3811 P2 C4231 *M9 C4456 *K8 C4548 *J9 C4655 *B8 C4786 *K11 C5068 C7 C5160 *C7 C5282 *C3 CL700 K8 DD201 D2 IC1103 D8 IC2009 *C6 L514 *R8 R304 A2 R556 P9 R676 *P11
C3019 *L7 C3812 *M1 C4232 *M9 C4457 *K9 C4549 *J9 C4656 *H9 C4787 *K10 C5069 C7 C5161 *C7 C5283 *B4 CL701 K8 DD202 C2 IC1104 D8 IC2010 *C7 L515 *R8 R305 A3 R557 R9 R677 P11
C3020 *K6 C3813 *N2 C4233 *M9 C4458 *H9 C4550 *J9 C4657 *H9 C4788 *K10 C5070 D7 C5162 *C7 C5284 *B3 CL702 K8 DD203 K2 IC1105 C8 IC2300 P13 L516 R9 R306 N6 R558 P9 R678 *P9
C3021 *L6 C3814 *N2 C4234 *M9 C4459 *J8 C4551 *J9 C4658 *H9 C4789 *L12 C5071 D7 C5163 *C7 C5285 *C4 CL703 J9 DD204 H2 IC1106 C8 IC2301 N13 L517 R9 R307 A5 R559 R9 R679 P9
C3022 *K7 C3815 *N2 C4235 *M9 C4460 *J9 C4552 *J9 C4659 *H9 C4790 *L12 C5072 D7 C5164 *D7 C5286 C7 CL704 K8 IC1201 G9 IC2302 L12 L518 R9 R308 A5 R560 P9 R680 P10
C3023 *L7 C3816 *N2 C4236 *M9 C4461 *J8 C4553 *J9 C4660 *H9 C4791 *K11 C5073 D7 C5165 *D7 C5287 C7 CL800 K9 E206 B12 IC1202 G10 IC2303 N13 L519 R9 R309 A2 R561 R9 R681 *P11
C3100 *N12 C3817 *N2 C4237 *M9 C4462 *J9 C4554 *J9 C4700 *L11 C4792 *K11 C5074 C7 C5166 *C7 C5288 C7 CL801 J9 E207 G13 IC1203 G11 IC2304 L12 L520 R9 R310 A2 R562 P9 R682 P11
C3101 *P12 C3818 *N2 C4238 *L9 C4463 *H8 C4555 *J9 C4701 *J11 C4793 *K11 C5075 C7 C5167 *C7 C5289 C7 CL802 K9 E208 L13 IC1204 G12 IC2305 M12 L521 R9 R311 A2 R563 R9 R683 *P9
C3102 *N12 C3819 *N2 C4239 *L9 C4464 *K9 C4556 *J9 C4702 *K10 C4794 *K11 C5076 D7 C5168 *C7 C5290 C7 CL803 J9 E209 R12 IC1205 G4 IC2306 M12 L522 R9 R312 *N6 R564 P9 R684 P9
C3103 *P12 C3820 *N2 C4240 *L9 C4465 *H9 C4557 *J9 C4703 *K12 C4795 *K11 C5077 *C4 C5169 *C7 C5291 C7 CL805 K9 E210 K9 IC1206 G5 IC2307 L12 L523 R9 R313 A5 R565 P9 R685 P10
C3104 *N12 C3821 N2 C4241 L10 C4466 *J8 C4558 *K8 C4704 *L11 C4796 *K11 C5078 *C3 C5200 B4 C5292 B7 CL900 H9 E211 A5 IC1207 G6 IC2308 *M13 L2300 *N13 R314 A5 R566 P9 R686 *P11
C3105 *R12 C3822 P2 C4242 *L9 C4467 *J9 C4559 *K8 C4705 *J11 C4797 *L10 C5079 *D4 C5201 B4 C5293 B7 CL901 K8 E212 *L10 IC1208 G7 IC2309 *M13 L4200 *L9 R315 A2 R567 P9 R687 P11
C3106 *N12 C3823 P2 C4243 *L9 C4468 *J8 C4560 H8 C4706 *K10 C4798 *L10 C5080 *D3 C5202 C4 C5294 *C4 CL902 J8 E213 *L13 IC1209 G9 IC2310 *L13 L4201 *L9 R316 A2 R568 P9 R688 *P10
C3107 *R12 C3900 R5 C4244 *L9 C4469 *J9 C4561 *K9 C4707 *K12 C4799 *J12 C5081 *D4 C5203 C4 C5295 *C3 CL903 J9 E214 B8 IC1210 G8 IC2311 L12 L4202 *M10 R317 A2 R569 P9 R689 P9
C3108 *N12 C3901 R4 C4245 *M9 C4470 *K9 C4562 *K9 C4708 *J11 C4800 *J12 C5082 *D3 C5204 C4 C5296 *C4 CL904 K8 E215 P3 IC1301 F9 IC2400 R13 L4203 *N9 R318 A2 R570 P9 R690 P11
C3109 *R12 C3902 R4 C4246 *M9 C4471 *J9 C4563 *K9 C4709 *L11 C4801 *L11 C5083 *C4 C5205 C4 C5297 *C3 CL1001 F9 E216 *M7 IC1302 F10 IC2500 *M11 L4204 *N9 R319 *N6 R571 P9 R691 P11
C3110 *N12 C3903 R4 C4247 *M10 C4472 *J8 C4564 *K9 C4710 *J11 C4802 *L11 C5084 *C3 C5206 B4 C5298 *C4 CL1002 E9 E217 *G3 IC1303 F11 IC2600 A9 L4205 *N9 R320 A4 R600 L9 R692 P10
C3111 *R12 C3904 *R5 C4248 *M10 C4473 *J9 C4565 *J8 C4711 *K10 C4803 *K11 C5085 *D4 C5207 B4 C5299 *C4 CL1003 E9 E218 *A12 IC1304 F11 IC2700 *J5 L4206 *N9 R321 A4 R601 L9 R693 P10
C3112 *N12 C3905 *P4 C4249 *M9 C4474 *J8 C4566 *J8 C4712 *K12 C4804 *K11 C5086 C7 C5208 C3 C5300 *B4 CL1004 E9 E219 G3 IC1305 F12 IC2701 *H5 L4207 *N9 R322 A2 R602 *P10 R694 *P11
C3113 *R12 C3906 *P4 C4250 *M9 C4475 *J9 C4567 *J9 C4713 *L12 C4805 *L11 C5087 C7 C5209 B5 C5301 *B4 CL1005 E9 E220 *A7 IC1306 *F9 IC2702 M11 L4300 *K8 R323 A2 R603 P10 R695 *P11
C3114 *N12 C3907 R4 C4251 *M10 C4476 *J9 C4568 *J9 C4714 *L11 C4806 *J12 C5088 D7 C5210 B5 C5302 *B4 CL1006 E9 E221 M7 IC1307 *F10 IC2703 M12 L4301 *H9 R324 A2 R604 *P10 R696 *P11
C3115 *R12 C3908 *P4 C4252 *M10 C4477 *J9 C4569 *J8 C4715 *J11 C4807 J11 C5089 D7 C5211 C5 C5303 *B4 CL1007 E9 E222 G7 IC1308 *F11 IC2800 *H5 L4302 *J8 R325 A2 R605 P10 R697 *P11
C3116 *P12 C3909 *N4 C4253 *M9 C4478 *K8 C4570 *J8 C4716 *K10 C4808 *L11 C5090 C7 C5212 C5 C5304 *C4 CL1008 D9 E223 *G13 IC1309 *F12 IC2801 *H5 L4303 *J9 R326 *N6 R606 *P11 R698 P11
C3117 *P11 C3910 *P4 C4254 *M9 C4479 *K8 C4571 *J8 C4717 *K12 C4809 *J11 C5091 C7 C5213 C5 C5305 *C4 CL1009 C9 E224 *G7 IC1310 *F12 IC2802 M11 L4304 *K8 R327 A4 R607 *P10 R699 P11
C3118 *P12 C3911 *P4 C4255 *M8 C4480 *K9 C4572 *J8 C4718 *K11 C5000 C4 C5092 C7 C5214 C5 C5306 *C4 CL1010 C9 E225 *R4 IC1401 E9 IC2803 N11 L4305 *K9 R328 A4 R608 *P10 R700 P11
C3119 *P12 C3912 *P4 C4256 *M8 C4481 *K9 C4573 *K8 C4719 *K11 C5001 C4 C5093 C7 C5215 B5 C5307 *C4 CL1011 C9 E226 *R12 IC1402 E10 IC2900 *H6 L4306 *K9 R329 A2 R609 P10 R701 P11
C3120 *P12 C3913 *P4 C4257 *M9 C4482 *J9 C4574 *K8 C4720 *K11 C5002 D4 C5094 *C4 C5216 B5 C5308 *B4 CL1012 C9 IC1403 E11 IC2901 *J6 L4307 *K8 R330 A2 R610 P10 R702 *P9
C3121 *R11 C3914 *P4 C4258 *M9 C4483 *J8 C4575 *J9 C4721 *K11 C5003 D4 C5095 *C3 C5217 C4 C5309 *B4 CL1013 C9 F200 G1 IC1404 E11 IC2902 *K5 L4308 *K9 R331 A2 R611 *P10 R703 *P9
C3122 *P12 C3915 *P5 C4259 *M8 C4484 *J9 C4576 *J9 C4722 *K11 C5004 D4 C5096 *D4 C5218 C4 C5310 *C5 CL1101 F7 F201 E1 IC1405 E12 IC2903 *K5 L4500 *L11 R332 *N6 R612 *P10 R704 *P9
C3123 *R12 C3916 *P4 C4260 *M8 C4485 *J9 C4577 *J8 C4723 *K11 C5005 D4 C5097 *D3 C5219 C4 C5311 *B5 CL1102 E7 F202 C1 IC1406 *E9 IC3000 *L7 L4501 *J11 R333 A4 R613 P10 R705 *P10
C3124 *P12 C3917 *P4 C4261 *M9 C4486 *J9 C4578 *J8 C4724 *K11 C5006 C4 C5098 *C4 C5220 C4 C5312 *B5 CL1103 E7 F203 L1 IC1407 *E10 IC3001 *K7 L4502 *K10 R334 A4 R614 P10 R706 P10
C3125 *R12 C3918 *P4 C4262 *M9 C4487 *J9 C4579 *J9 C4725 *K11 C5007 C4 C5099 *C4 C5221 C4 C5313 *C5 CL1104 E7 F204 J1 IC1408 *E11 IC3002 *L7 L4503 *K12 R400 P6 R615 *P11 R707 P9
C3126 *P12 C3919 *P4 C4263 *N9 C4488 *J9 C4580 *J9 C4726 *L11 C5008 D3 C5100 *C4 C5222 C3 C5314 *C5 CL1105 E7 F205 R1 IC1409 *E12 IC3100 N12 R401 R5 R616 *P11 R708 P9

R709	P9	R1056	G11	R1148	*F7	R1240	G8	R2300	P13	R2620	*P6	R3101	*N12	R3529	K8	R3954	R2	RB1405	*E13	RB2001	*C3	RB2910	*H6	RB3722	J5
R710	*P10	R1057	G11	R1149	G7	R1241	F8	R2301	P13	R2621	*P6	R3102	R12	R3530	K8	R3955	R2	RB1406	E13	RB2002	C3	RB2911	*H6	RB3723	*J4
R711	P10	R1058	G11	R1150	*G7	R1242	G8	R2302	N13	R2622	*N7	R3103	R12	R3531	*L12	R3956	R2	RB1407	B11	RB2003	C3	RB2912	K5	RB3724	*J4
R750	*K8	R1059	G11	R1151	G7	R1243	G8	R2303	N13	R2623	*N7	R3104	P11	R3600	G4	R3957	R2	RB1408	B11	RB2004	*C3	RB2913	K5	RB3725	*J4
R752	*K9	R1060	G11	R1152	G6	R1301	F9	R2304	N13	R2624	*N7	R3106	P12	R3601	*G4	R3958	R2	RB1409	B11	RB2005	C3	RB2914	K5	RB3726	J4
R753	*J9	R1061	G11	R1153	G6	R1302	F10	R2305	M13	R2625	*N7	R3107	R12	R3602	A8	R3959	R2	RB1410	B11	RB2006	*C3	RB2915	K5	RB3727	J5
R754	*J9	R1062	F11	R1154	G6	R1303	F10	R2306	M12	R2626	*N7	R3109	R11	R3603	A8	R3960	*P4	RB1411	B12	RB2007	*B5	RB2916	K5	RB3728	J5
R755	*J9	R1063	F11	R1155	G6	R1304	F11	R2307	N13	R2627	*N7	R3200	K9	R3604	P13	R3961	*N4	RB1412	B12	RB2008	*B5	RB2917	K5	RB4200	*M10
R756	K9	R1064	F11	R1156	G6	R1305	F12	R2308	N13	R2628	*N7	R3201	K9	R3605	*G4	R3962	*N4	RB1413	B12	RB2009	*B6	RB2918	K5	RB4300	*K8
R757	J8	R1065	F11	R1157	G6	R1306	*F9	R2309	N13	R2629	*N7	R3206	M7	R3606	H4	R3963	*P4	RB1414	B12	RB2010	*B6	RB2919	K5	RB4500	K12
R800	*J9	R1066	G11	R1158	F6	R1307	*F10	R2310	N13	R2630	*N7	R3208	N8	R3607	N8	R3964	*P4	RB1415	B12	RB2011	*B6	RB2920	K5		
R801	F8	R1067	G11	R1159	F6	R1308	*F11	R2311	N13	R2631	*N7	R3209	K8	R3608	N8	R3965	*P4	RB1416	B12	RB2012	*B6	RB2921	K5	S200	A8
R802	F8	R1068	G11	R1160	F6	R1309	*F12	R2312	M13	R2632	*N6	R3210	K8	R3609	N8	R3966	*P5	RB1501	D13	RB2013	*B7	RB2922	K5	S3601	A9
R803	E8	R1069	G11	R1161	F6	R1310	*F13	R2313	M12	R2633	*N6	R3211	K8	R3610	N8	R3967	*P4	RB1502	*D13	RB2014	*B7	RB2923	K5		
R804	E8	R1070	G11	R1162	G6	R1401	E9	R2314	M13	R2634	*N6	R3212	N8	R3611	N8	R3968	*P4	RB1503	*D13	RB2015	*B7	RB3000	L7	TP200	A3
R805	E8	R1071	G11	R1163	G6	R1402	E10	R2315	M12	R2635	*N6	R3213	M8	R3612	N8	R3969	*P4	RB1504	D13	RB2016	*B7	RB3001	L7	TP201	A4
R806	D8	R1072	F11	R1164	G6	R1403	E10	R2316	M12	R2636	*N6	R3214	M8	R3617	*G4	R3970	*P4	RB1505	*D13	RB2500	L11	RB3002	L7	TP202	A4
R807	D8	R1073	F11	R1165	G6	R1404	E11	R2317	N13	R2637	*N6	R3215	M8	R3618	*H4	R3971	*P4	RB1506	D13	RB2501	L11	RB3003	L7	TP203	A5
R808	C8	R1074	F11	R1166	G6	R1405	E12	R2318	N13	R2638	P6	R3216	M8	R3619	*H4	R3972	*P4	RB1507	*B9	RB2700	J5	RB3004	L7	TP204	A5
R809	D8	R1075	F11	R1167	G6	R1406	*E9	R2319	N13	R2639	*N6	R3217	M8	R3620	*H4	R3973	*P4	RB1508	*B9	RB2701	H5	RB3005	L7	TP220	A3
R810	C8	R1076	G12	R1168	F6	R1407	*E10	R2400	*M10	R2640	*N7	R3218	M8	R3621	*H4	R3974	*P4	RB1509	*B9	RB2702	*J5	RB3006	L7	TP400	P6
R811	C8	R1077	G12	R1169	F6	R1408	*E11	R2401	R12	R2641	*N7	R3219	M8	R3622	N8	R3975	R3	RB1510	*B9	RB2703	*H5	RB3007	L7	TP401	R7
R812	C8	R1078	G12	R1170	F6	R1409	*E12	R2402	R12	R2642	*N7	R3220	M8	R3623	*J4	R4000	M6	RB1511	*B10	RB2704	*J5	RB3008	K7	TP2400	P13
R900	J8	R1079	G12	R1171	F6	R1410	*E13	R2403	R13	R2643	*N6	R3221	N8	R3624	J4	R4001	M6	RB1512	*B10	RB2705	*H5	RB3009	K7	TP2401	P13
R901	E8	R1080	G12	R1172	G7	R1501	D9	R2404	R13	R2644	*N7	R3222	N8	R3700	*J5	R4002	M6	RB1513	*B10	RB2706	J5	RB3010	L7	TP2402	P13
R902	F8	R1081	G12	R1173	G7	R1502	D10	R2405	*R13	R2645	*N7	R3223	N8	R3701	*H4	R4003	M5	RB1514	*B10	RB2707	H5	RB3011	K7	TP2403	P13
R903	E8	R1082	F12	R1174	G7	R1503	D10	R2406	*R13	R2646	*N7	R3224	N8	R3702	J4	R4004	M5	RB1515	*B11	RB2708	J5	RB3012	L7	TP2404	M7
R904	E8	R1083	F12	R1175	G7	R1504	D11	R2407	*R13	R2647	*N6	R3225	N8	R3703	*J4	R4100	M3	RB1516	*B11	RB2709	J5	RB3013	K7	TP2405	P7
R905	D8	R1084	F12	R1176	G7	R1505	D12	R2408	*R13	R2648	*N6	R3226	N8	R3704	*J4	R4101	M3	RB1601	C13	RB2710	J5	RB3014	L7	TP2406	P7
R906	E8	R1085	F12	R1177	G7	R1506	*D9	R2409	*M9	R2649	*N7	R3230	N8	R3800	*N1	R4102	M3	RB1602	*C13	RB2711	J5	RB3015	K7	TP2407	M7
R907	D8	R1086	G12	R1178	F7	R1507	*D10	R2410	*M9	R2650	*N6	R3231	K8	R3801	*N1	R4103	M3	RB1603	*C13	RB2712	J5	RB3016	K7	TP2700	H9
R908	C8	R1087	G12	R1179	F7	R1508	*D11	R2411	M10	R2651	*P6	R3300	L6	R3802	*N1	R4104	M3	RB1604	C13	RB2713	H5	RB3017	K7	TP2701	J10
R909	D8	R1088	G12	R1180	F7	R1509	*D12	R2412	*M10	R2652	*N7	R3301	K6	R3803	*N1	R4200	*M9	RB1605	*C13	RB2714	H5	RB3018	K7	TP3200	K8
R910	C8	R1089	G12	R1181	F7	R1510	*D13	R2413	M10	R2653	P6	R3302	L6	R3804	P2	R4201	*L9	RB1606	C13	RB2715	H5	RB3019	K7	TP3201	L7
R911	C8	R1090	G12	R1182	G7	R1601	C9	R2414	*M10	R2654	*P6	R3303	K6	R3805	P2	R4202	M10	RB1607	*B11	RB2716	*M11	RB3020	K7	TP3202	M7
R912	C8	R1091	G12	R1183	G7	R1602	C10	R2415	*M9	R2655	*N7	R3304	L6	R3806	*N2	R4203	M10	RB1608	*B11	RB2717	*M12	RB3021	L7	TP3203	M8
R1000	*G10	R1092	F12	R1184	G7	R1603	C10	R2416	*M9	R2656	*N6	R3305	K6	R3807	P2	R4204	M10	RB1609	*B12	RB2718	*M11	RB3022	L7	TP3601	N8
R1001	*F9	R1093	F12	R1185	G7	R1604	C11	R2417	*M9	R2657	*P6	R3306	L5	R3808	P2	R4205	M10	RB1610	*B12	RB2719	*M12	RB3023	L7	TP3900	R3
R1002	G9	R1094	F12	R1186	G7	R1605	C12	R2418	*M8	R2658	*N7	R3307	K5	R3809	*N2	R4206	*M10	RB1611	*B11	RB2720	*M11	RB3100	*P12	TP4200	M10
R1003	G10	R1095	F12	R1187	G7	R1606	*C9	R2419	*M8	R2659	*N7	R3308	*L5	R3810	*N2	R4207	*M10	RB1612	*B11	RB2721	*M12	RB3101	*R12	TP4201	L9
R1004	*F10	R1096	*G4	R1188	F7	R1607	*C10	R2420	*M8	R2660	*P6	R3309	*K5	R3811	*N1	R4208	*M10	RB1613	*B12	RB2722	*M12	RB3102	*P12	TP4202	L10
R1005	G10	R1097	*F4	R1189	F7	R1608	*C11	R2421	*M9	R2661	P7	R3310	*L5	R3812	N3	R4209	*M10	RB1614	*B12	RB2723	*M12	RB3103	*R12	TP4203	L10
R1006	*G10	R1098	G4	R1190	F7	R1609	*C12	R2422	*M9	R2662	*N6	R3311	*K5	R3813	N3	R4210	*M10	RB1615	*B12	RB2724	*M11	RB3104	*P12	TP4300	L7
R1007	G11	R1099	G5	R1191	F7	R1610	*C13	R2423	*M9	R2663	*N7	R3312	*L5	R3814	*N1	R4215	*M9	RB1616	*B12	RB2725	*M11	RB3105	*R12	TP4301	L7
R1008	G9	R1100	*F5	R1192	*G9	R1701	F3	R2424	*M8	R2664	*N7	R3313	*K5	R3815	*N1	R4216	*M9	RB1701	*F3	RB2726	*M11	RB3106	*P12	TP4302	L7
R1009	G9	R1101	G5	R1193	*F9	R1702	F4	R2425	*M8	R2665	*P6	R3314	*L6	R3816	P2	R4217	*M9	RB1702	F3	RB2727	*M12	RB3107	*R12	TP4303	L7
R1010	G9	R1102	*G5	R1194	G8	R1703	F5	R2426	*M8	R2666	*N6	R3315	*K6	R3817	*N1	R4218	*N9	RB1703	F3	RB2728	*M12	RB3108	*N12	TP4500	K12
R1011	G9	R1103	G5	R1195	G9	R1704	F6	R2500	*L11	R2667	*N7	R3400	K5	R3818	*N1	R4300	*H8	RB1704	*F3	RB2729	*M12	RB3109	*N12	TP4501	K12
R1012	G9	R1104	G4	R1196	*G8	R1705	F7	R2501	*L11	R2668	*N6	R3401	*L4	R3819	*N1	R4301	*H8	RB1705	F3	RB2730	*M12	RB3110	*N12	TP4502	K12
R1013	G9	R1105	G4	R1197	G8	R1706	*F4	R2502	*L11	R2669	*N7	R3402	K5	R3820	*N1	R4302	*K8	RB1706	*F3	RB2731	*M12	RB3111	*N12	TP4503	K12
R1014	F9	R1106	G4	R1198	*G8	R1707	*F5	R2503	*L11	R2670	P7	R3403	*L4	R3821	*N7	R4303	*K8	RB1707	B4	RB2800	H5	RB3112	*R12		
R1015	F9	R1107	G4	R1199	G8	R1708	*F6	R2504	*L11	R2671	A9	R3404	K5	R3900	*P4	R4304	*K8	RB1708	B4	RB2801	H5	RB3113	*R12	X2300	M13
R1016	F9	R1108	G4	R1200	G8	R1709	*F7	R2505	*L11	R2672	A10	R3405	*L4	R3901	*P5	R4305	*K8	RB1709	B4	RB2802	H5	RB3114	*R12	X2301	M13
R1017	F9	R1109	G4	R1201	G8	R1710	*F7	R2506	*L11	R2673	A9	R3406	K4	R3902	*P5	R4504	*K12	RB1710	B4	RB2803	H5	RB3115	*R12	X2302	L13
R1018	G10	R1110	F4	R1202	G8	R1801	E3	R2507	*L11	R2674	A9	R3407	*L5	R3903	*P4	R4505	*K12	RB1711	B4	RB2804	H5	RB3116	*P11	X3200	K9
R1019	G10	R1111	F4	R1203	G8	R1802	E4	R2508	*L11	R2675	A9	R3408	*K4	R3904	*P4	R4506	*K12	RB1712	B5	RB2805	H5	RB3117	*R11	X3800	P2
R1020	G10	R1112	F4	R1204	G8	R1803	E5	R2509	*M9	R2676	*P7	R3409	L5	R3905	*P4	R4507	*K12	RB1713	B5	RB2806	H5	RB3118	*P12	X3900	R5
R1021	G10	R1113	F4	R1205	G8	R1804	E6	R2510	*M9	R2677	*P7	R3410	*K4	R3906	*P4	R4508	*K12	RB1714	B5	RB2807	G5	RB3119	*R11		
R1022	G10	R1114	G4	R1206	F8	R1805	E7	R2511	*M9	R2678	*P7	R3411	L5	R3907	R3	R4509	*K12	RB1715	B5	RB2808	H6	RB3120	*P12		
R1023	G10	R1115	G4	R1207	F8	R1806	*E4	R2512	*M9	R2679	*P7	R3412	*K4	R3908	*P5			RB1716	B5	RB2809	H6	RB3121	*R12		
R1024	F10	R1116	G4	R1208	F8	R1807	*E5	R2513	*K8	R2680	*P7	R3413	L5	R3909	*P5	RB1001	B8	RB1801	*E3	RB2810	H6	RB3122	*P12		
R1025	F10	R1117	G4	R1209	F8	R1808	*E6	R2514	*K8	R2681	*P7	R3414	*K5	R3910	*P4	RB1002	B8	RB1802	E3	RB2811	H6	RB3123	*R12		
R1026	F10	R1118	G4	R1210	G9	R1809	*E7	R2515	*J8	R2682	*P7	R3415	L4	R3911	*P4	RB1003	B8	RB1803	E3	RB2812	H5	RB3124	*P11		
R1027	F10	R1119	G4	R1211	G9	R1810	*E7	R2516	*J8	R2683	*P7	R3500	*A6	R3912	*P4	RB1004	*B8	RB1804	*E3	RB2813	H5	RB3125	*P12		
R1028	G10	R1120	F4	R1212	G9	R1901	D3	R2517	*J8	R2684	P7	R3501	*A6	R3913	*P4	RB1005	*B8	RB1805	E3	RB2814	H5	RB3126	*P12		
R1029	G10	R1121	F4	R1213	G9	R1902	D4	R2518	*J8	R2685	P7	R3502	*A6	R3919	*N4	RB1006	*B8	RB1806	*E3	RB2815	G5	RB3127	*P12		
R1030	G10	R1122	F4	R1214	G9	R1903	D5	R2519	*L11	R2686	P7	R3503	*A6	R3920	*P4	RB1101	B8	RB1807	B5	RB2816	*N11	RB3128	*R11		
R1031	G10	R1123	F4	R1215	G9	R1904	D6	R2520	*L11	R2687	P7	R3504	*A6	R3921	*P4	RB1102	B8	RB1808	B6	RB2817	*M10	RB3129	*R11		
R1032	G10	R1124	G5	R1216	F9	R1905	D7	R2521	*K11	R2688	P7	R3505	*A6	R3922	*P4	RB1103	B8	RB1809	B6	RB2818	*N11	RB3130	*R12		
R1033	G10	R1125	G5	R1217	F9	R1906	*D4	R2522	*K11	R2689	P7	R3506	*A6	R3923	*P5	RB1104	*B8	RB1810	B6	RB2819	*M11	RB3131	*R12		
R1034	F10	R1126	G5	R1218	F9	R1907	*D5	R2523	*K11	R2690	*N6	R3507	*A6	R3932	A7	RB1105	*B8	RB1811	B6	RB2820	*N11	RB3700	*H4		
R1035	F10	R1127	G5	R1219	F9	R1908	*D6	R2524	*K11	R2691	*N6	R3508	*A6	R3933	A7	RB1106	*B8	RB1812	B6	RB2821	*M11	RB3701	*H4		
R1036	F10	R1128	G5	R1220	F8	R1909	*D7	R2600	N6	R2692	N6	R3509	*A6	R3934	A7	RB1301	F13	RB1813	B7	RB2822	*N12	RB3702	*H4		
R1037	F10	R1129	G5	R1221	F8	R1910	*D7	R2601	*N6	R2693	P7	R3510	*A6	R3935	R2	RB1302	*F13	RB1814	B7	RB2823	*M11	RB3703	*H4		
R1038	G11	R1130	F5	R1222	F8	R2001	C3	R2602	*N6	R2694	P7	R3511	*A6	R3936	R2	RB1303	*F13	RB1815	B7	RB2824	*M10	RB3704	*H4		
R1039	G11	R1131	F5	R1223	F8	R2002	C4	R2603	N7	R2695	*P6	R3512	*A6	R3937	A7	RB1304	F13	RB1816	B7	RB2825	*M11	RB3705	*H4		
R1040	G11	R1132	F5	R1224	F8	R2003	C5	R2604	*N6	R2696	*P6	R3513	*A6	R3938	A7	RB1305	*F13	RB1901	*D3	RB2826	*M11	RB3706	*H4		
R1041	G11	R1133	F5	R1225	F8	R2004	C6	R2605	*N7	R2697	*P6	R3514	*A6	R3939	A7	RB1306	F13	RB1902	D3	RB2827	*M11	RB3707	*H4		
R1042	G11	R1134	G5	R1226	G8	R2005	C7	R2606	N6	R2698	*N6	R3515	*A6	R3940	*P4	RB1307	B9	RB1903	D3	RB2828	*N11	RB3708	H4		
R1043	G11	R1135	G5	R1227	G8	R2006	*C4	R2607	*N6	R2699	*N6	R3516	*A6	R3941	*P4	RB1308	B9	RB1904	*D3	RB2829	*N11	RB3709	H5		
R1044	F11	R1136	G5	R1228	G8	R2007	*C5	R2608	*N6	R2700	*N6	R3517	*A6	R3942	*P4	RB1309	B9	RB1905	D3	RB2830	*N11	RB3710	H4		
R1045	F11	R1137	G5	R1229	G8	R2008	*C6	R2609	*N6	R2701	*N7	R3518	*A6	R3943	*P4	RB1310	B9	RB1906	*D3	RB2831	*N12	RB3711	H5		
R1046	F11	R1138	G5	R1230	F8	R2009	*C7	R2610	*N6	R2702	*N7	R3519	*A6	R3944	*R3	RB1311	B10	RB1907	*B4	RB2900	J6	RB3712	H4		
R1047	F11	R1139	G5	R1231	F8	R2010	*C7	R2611	*N7	R2703	*P6	R3520	*A6	R3945	*R3	RB1312	B10	RB1908	*B4	RB2901	*J6	RB3713	H5		
R1048	*G11	R1140	F5	R1232	F8	R2100	*L11	R2612	*N7	R2704	*P6	R3521	*A6	R3946	*R3	RB1313	B10	RB1909	*B4	RB2902	J6	RB3714	J5		
R1049	G11	R1141	F5	R1233	F8	R2101	*K11	R2613	*N7	R2705	*P6	R3522	*A6	R3947	*R3	RB1314	B10	RB1910	*B4	RB2903	*J6	RB3715	J5		
R1050	G11	R1142	F5	R1234	F8	R2102	*K12	R2614	*N6	R2706	*N6	R3523	*A6	R3948	*R2	RB1315	B11	RB1911	*B5	RB2904	J6	RB3716	H5		
R1051	G12	R1143	F5	R1235	F8	R2103	*K12	R2615	*P6	R2707	*N6	R3524	*N6	R3949	*R2	RB1316	B11	RB1912	*B5	RB2905	J6	RB3717	H5		
R1052	*G12	R1144	*G6	R1236	G8	R2104	*K12	R2616	*N7	R2708	*N6	R3525	L10	R3950	R2	RB1401	E13	RB1913	*B5	RB2906	*H6	RB3718	H5		
R1053	G12	R1145	*F6	R1237	G8	R2105	K10	R2617	*P6	R2709	N6	R3526	L10	R3951	R2	RB1402	*E13	RB1914	*B4	RB2907	*H6	RB3719	H5		
R1054	*F11	R1146	G6	R1238	G8	R2200	*M9	R2618	*P6	R2750	*N11	R3527	*K11	R3952	R2	RB1403	*E13	RB1915	*B6	RB2908	*J6	RB3720	J5		
R1055	*F12	R1147	G6	R1239	G8	R2201	*M9	R2619	*P6	R3100	*N12	R3528	L10	R3953	R2	RB1404	E13	RB1916	*B5	RB2909	*H6	RB3721	J4		

Components locations list; previous page

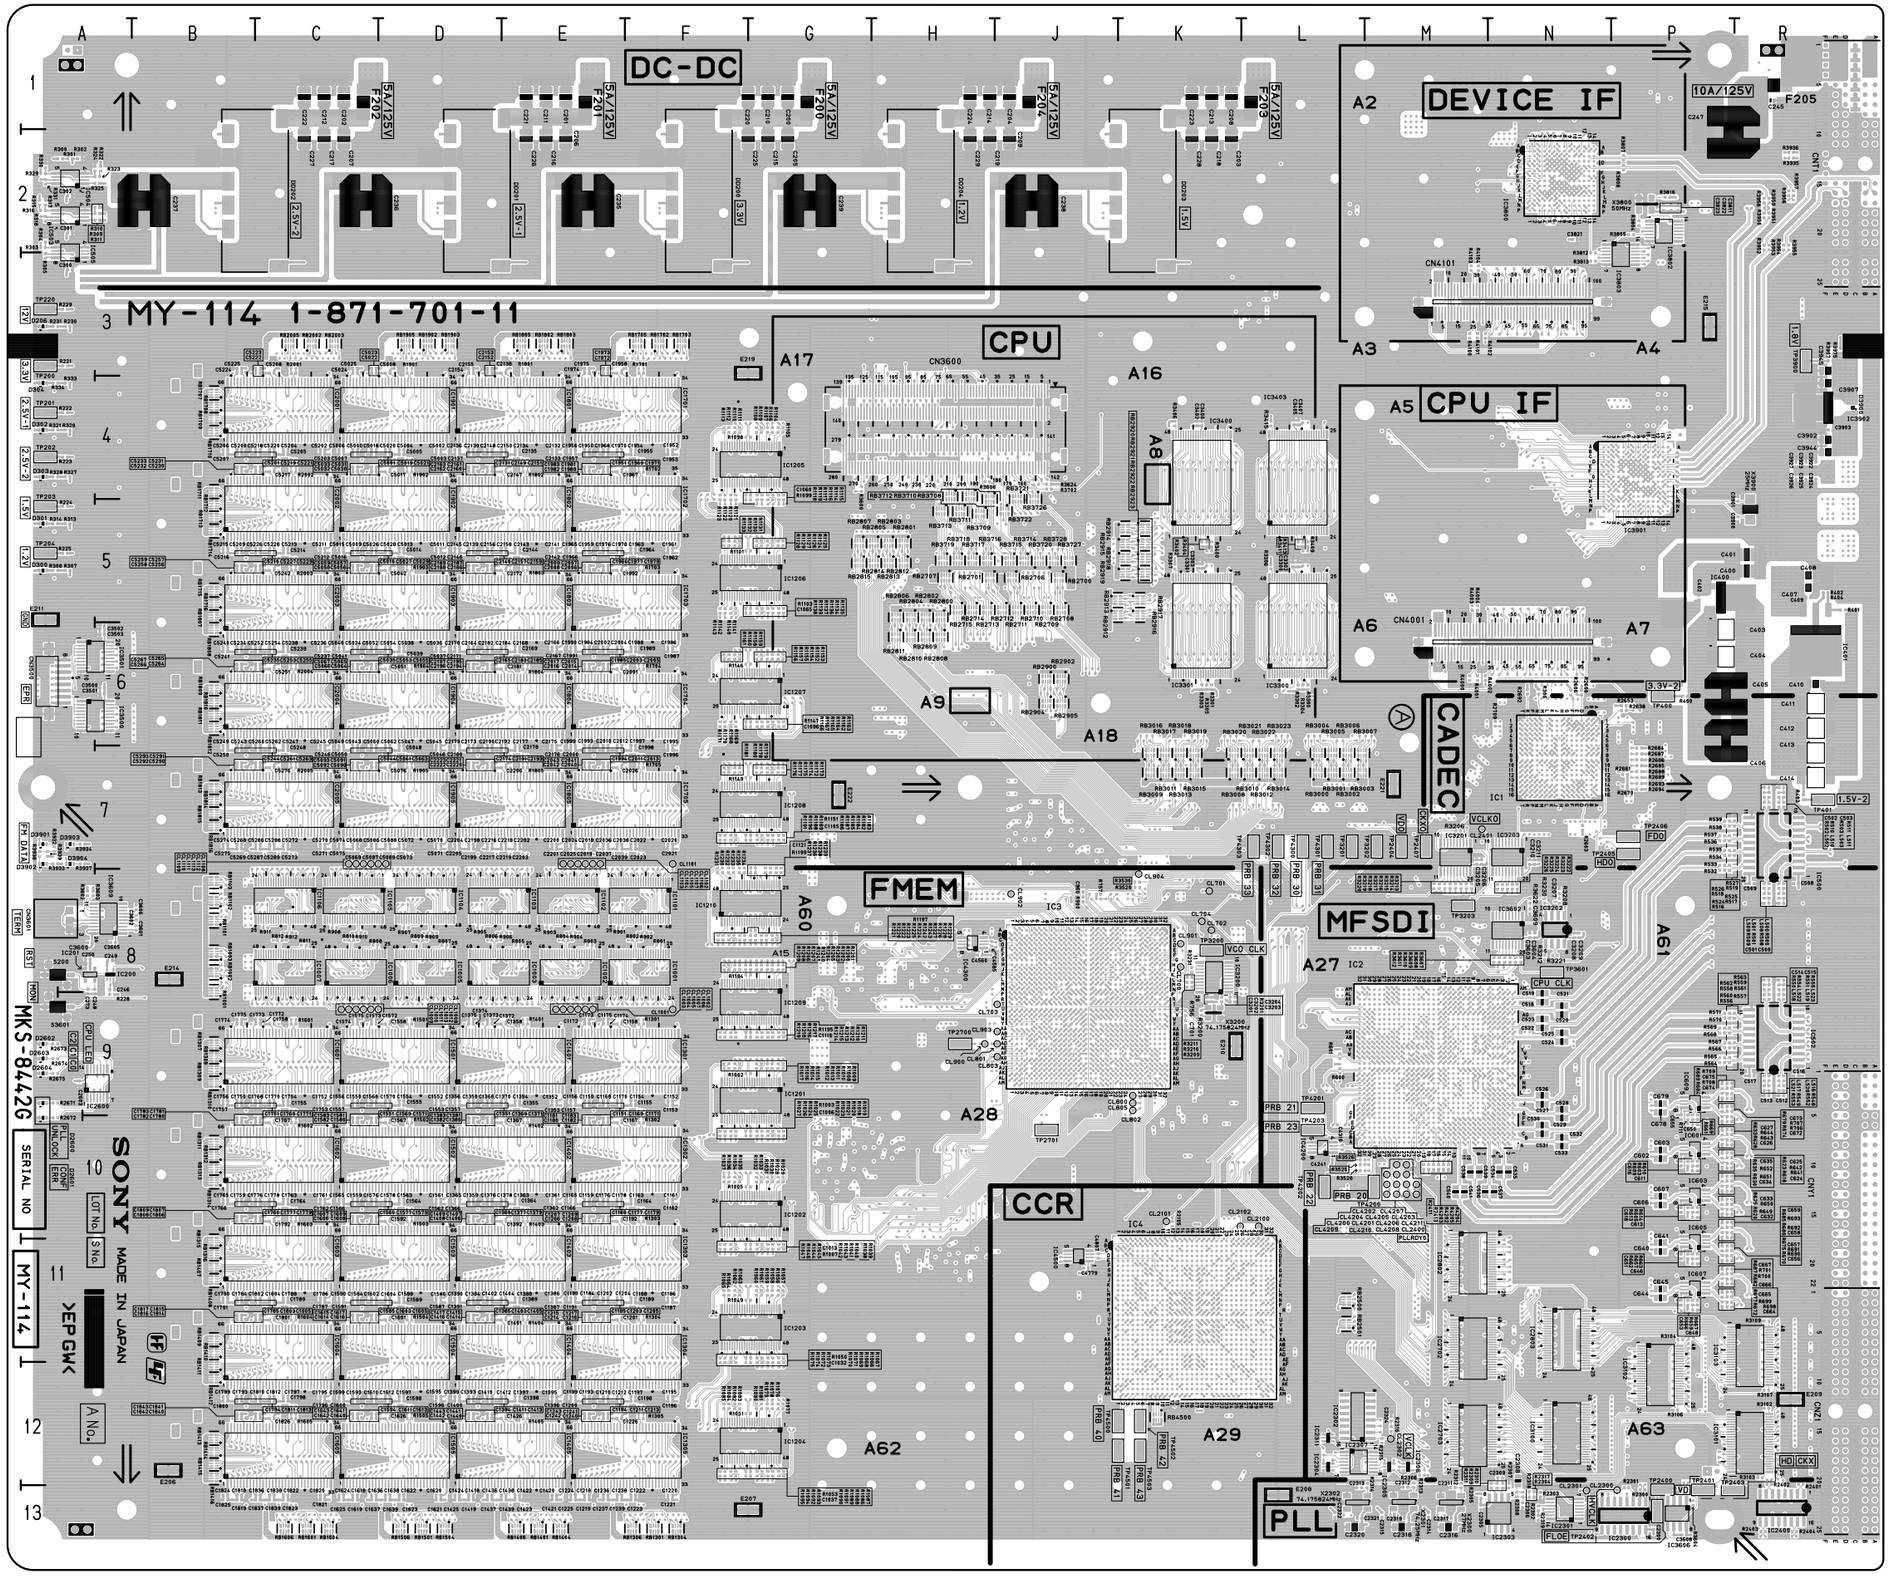

MY-114 -A SIDE-
SUFFIX: -11

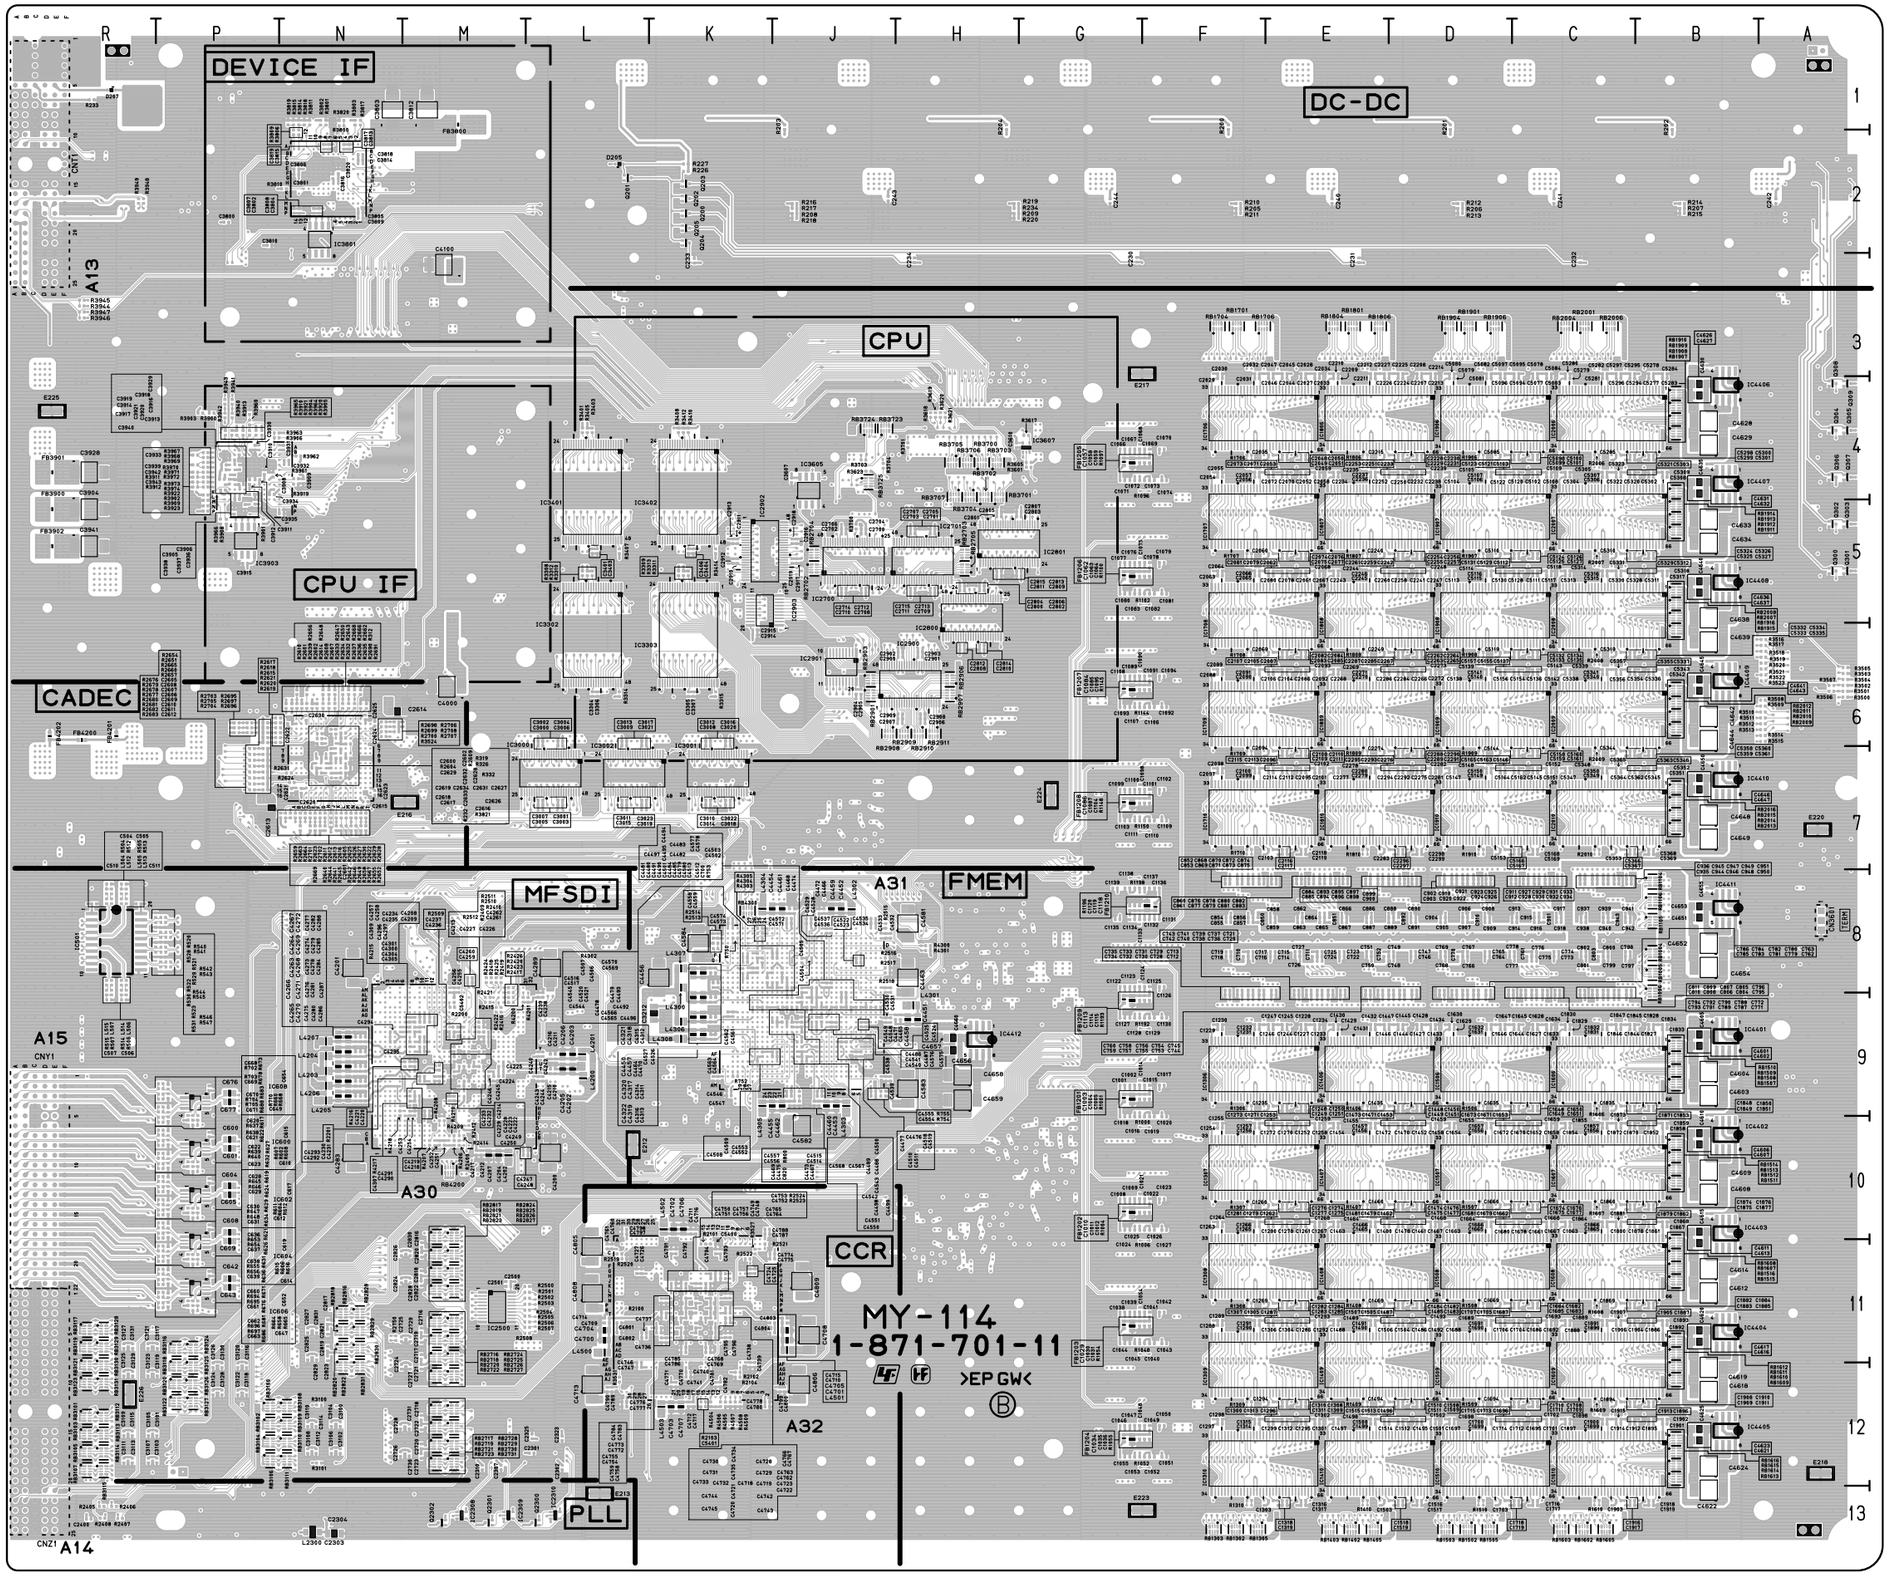


MY-114 -B SIDE-
SUFFIX: -11

OUT-33 (1-877-211-12)
---
*:B SIDE


C201	A9	C411	N4	C1009	A8	C1727	*C7	C2301	*K6	C2732	*J8	C2823	G8	C2949	*J6	C3040	*H6	C3143	*M9	C3333	*N8	C3523	*M6	C3911	*J12	C4086	*H11	C4177	*F10	CL2318	H6	D3803	A5	IC502	P12
C202	A9	C412	L4	C1010	A8	C1728	*B7	C2302	*K6	C2733	*H9	C2824	H8	C2950	*K5	C3041	*G5	C3144	*M10	C3334	*N8	C3524	*M6	C3912	*J12	C4087	*H11	C4178	*F10	CL2319	H6	D3804	A5	IC503	P12
C203	A9	C413	N4	C1011	A8	C1729	*B7	C2303	*H6	C2734	*H9	C2825	G8	C2951	*J5	C3042	*H5	C3145	*M10	C3335	*N8	C3525	*M6	C3913	*H12	C4088	*H11	C4179	*F10	CL2320	H6	D3805	A5	IC504	*P12
C204	A8	C414	L4	C1012	A10	C1730	*B7	C2304	*H6	C2735	*H9	C2826	H9	C2952	*J5	C3043	*G5	C3146	*N9	C3336	*N8	C3526	*N6	C3914	*J12	C4089	*J11	C4180	*F10	CL2321	H6	D3806	A5	IC505	*P12
C205	A8	C415	M4	C1013	C8	C1731	*B7	C2401	*J6	C2736	*H9	C2827	G9	C2953	*J5	C3044	*G5	C3147	*M9	C3337	*N8	C3527	*M6	C3915	*H12	C4090	*H11	C4181	*F10	CL2322	H6	D3807	A5	IC506	*P12
C206	A8	C416	L4	C1014	P11	C1732	B7	C2402	*K6	C2737	*J9	C2828	H9	C2954	*J6	C3045	*G6	C3148	*M10	C3338	*N8	C3528	*M6	C3916	*J12	C4091	*H11	C4182	*F10	CL2323	H5	D3808	A5	IC507	*P12
C207	P1	C417	*B3	C1015	A10	C1801	G7	C2403	*G6	C2738	*H9	C2829	H9	C2955	*J5	C3046	*G5	C3149	*N10	C3339	*N8	C3529	*M6	C4001	*J11	C4092	*H11	C4183	*F10	CL2324	H5			IC508	N12
C208	P1	C418	*A4	C1016	R12	C1901	A6	C2404	*H6	C2739	*H9	C2830	G8	C2956	*J6	C3047	*G6	C3150	*N9	C3340	*N8	C3530	*M6	C4002	*H10	C4093	*H11	C4184	*F10	CL2325	H5	DD201	M2	IC509	N12
C209	N1	C501	R12	C1017	C8	C1902	B6	C2501	J4	C2740	*H9	C2831	*J9	C2957	*J6	C3048	*G6	C3151	*M9	C3341	*N8	C3531	*M6	C4003	*J12	C4094	*J11	C4185	*F9	CL2326	H5	DD202	L2	IC510	N12
C210	L1	C502	*P12	C1018	C9	C2001	N6	C2502	J5	C2741	*J9	C2832	*J8	C2958	*J5	C3049	*H5	C3152	*M9	C3342	*M8	C3532	*M6	C4004	*J12	C4095	*J11	C4186	*F9	CL2327	H5	DD203	J2	IC511	N12
C211	K1	C503	P12	C1019	C9	C2002	N6	C2503	K4	C2742	*H8	C2833	H8	C2959	*K5	C3050	*G5	C3153	*M10	C3343	*M7	C3533	*N6	C4005	*H11	C4096	*J11	C4187	*F10	CL2328	H5	DD204	G2	IC601	R4
C212	H1	C504	P12	C1020	A8	C2003	N6	C2504	K5	C2743	*J9	C2834	H8	C2960	*J5	C3051	*H5	C3154	*M9	C3344	*M8	C3534	*N6	C4006	*H11	C4097	*J11	C4188	*F10	CL2329	G6			IC602	P4
C213	N1	C505	*P12	C1021	A8	C2004	N6	C2505	*K4	C2744	*H8	C2835	G8	C2961	*J5	C3052	*G6	C3155	*M10	C3345	*M8	C3535	*N6	C4007	*J11	C4098	*J11	C4189	*F10	CL2330	G6	E401	G10	IC603	P4
C214	L1	C506	P12	C1022	A7	C2005	N6	C2506	*K4	C2745	*H9	C2836	H8	C2962	*J6	C3053	*G5	C3156	*M10	C3346	*N7	C3536	*N6	C4008	*J11	C4099	*J11	C4190	*F10	CL2331	G6	E402	F7	IC604	*P4
C215	K1	C507	*P12	C1023	A8	C2006	N6	C2507	*J4	C2746	*J8	C2837	H9	C2963	*J6	C3054	*G6	C3157	*N10	C3347	*M7	C3537	*N6	C4009	*J12	C4100	*H11	C4191	*F10	CL2332	G6	E403	A5	IC605	*P4
C216	H1	C508	*P12	C1024	A8	C2007	N6	C2508	*J5	C2747	*H8	C2838	H9	C2964	*J5	C3055	*G5	C3158	*M9	C3348	*M8	C3538	*N6	C4010	H12	C4101	*H11	C4192	*F10	CL2333	G6	E404	H3	IC606	*P4
C217	N1	C509	*P12	C1101	M12	C2008	N6	C2509	J4	C2748	*H8	C2839	G9	C2965	*J6	C3056	*G6	C3159	*M9	C3349	*N8	C3539	*N6	C4011	*H11	C4102	*H11	C4193	*F10	CL2334	G6	E405	P5	IC607	*P4
C218	L1	C510	*P12	C1102	*D9	C2009	N6	C2510	*J4	C2749	*H9	C2840	H9	C2966	*K6	C3057	*G5	C3160	*M9	C3350	*N7	C3540	*N6	C4012	*J11	C4103	*H11	C4194	*F10	CL2501	H5	E406	K12	IC608	N4
C219	K1	C511	*P12	C1103	M12	C2010	N6	C2511	J4	C2750	*H8	C2841	H9	C2967	*K6	C3058	*G6	C3161	*M10	C3351	*M7	C3541	*N6	C4013	*J11	C4104	*H11	C4195	*F10	CL2502	H5	E407	K6	IC609	N4
C220	H1	C512	N12	C1104	*D10	C2011	N6	C2512	J4	C2751	*H9	C2842	*J8	C2968	*J5	C3059	*G5	C3162	*N10	C3352	*M7	C3542	*M7	C4014	*J11	C4105	*H11			CL2503	H5	E408	*G10	IC610	N4
C221	N1	C513	N12	C1105	*D10	C2012	N6	C2513	J4	C2752	*H9	C2843	*J8	C2969	*J6	C3060	*H6	C3163	*N10	C3353	*M8	C3543	*M5	C4015	*J12	C4106	*H11	CL701	M8	CL2504	H5	E409	*P5	IC611	N4
C222	L1	C514	N12	C1106	M12	C2013	N6	C2514	J4	C2753	*H8	C2844	*J8	C2970	*J5	C3061	*H6	C3164	*N9	C3354	*M7	C3544	*M6	C4016	H12	C4107	*H11	CL702	M7	CL2601	G5	E410	*L11	IC614	*P4
C223	K1	C515	N12	C1107	L12	C2014	N6	C2515	J5	C2754	*H8	C2845	*H9	C2971	*J6	C3062	*G6	C3165	*N9	C3355	*M8	C3545	*M6	C4017	*H11	C4108	*H11	CL703	P9	CL2602	G5	E411	*K6	IC615	*P4
C224	H1	C516	N12	C1108	*D9	C2015	N5	C2516	J5	C2755	*H9	C2846	*H8	C2972	*J5	C3063	*G5	C3166	*N10	C3356	*M8	C3546	*N6	C4018	*J11	C4109	*H11	CL704	M10	CL2603	F5	E412	*D7	IC701	G11
C225	N1	C517	N12	C1109	L12	C2016	N5	C2517	J4	C2756	*H8	C2847	*H9	C2973	*J6	C3064	*G5	C3167	*N10	C3357	*N8	C3547	*M6	C4019	*J10	C4110	*J11	CL705	P6	CL2604	F5	E413	*L12	IC702	N13
C226	L1	C518	N12	C1110	*D10	C2017	N8	C2518	J4	C2757	*H8	C2848	*J8	C2974	*J5	C3065	*H5	C3168	*N9	C3358	*M7	C3548	*M6	C4020	*H11	C4111	*J10	CL706	M4	CL3701	H10	E414	P12	IC703	R4
C227	J1	C519	N12	C1111	*E10	C2018	N8	C2519	*J4	C2758	*H8	C2849	*J8	C2975	*J6	C3066	*H5	C3169	*N9	C3359	*M7	C3549	*N6	C4021	*H10	C4112	*J10	CL707	H9	CL3702	H10	E415	N3	IC704	R5
C228	H1	C520	N12	C1112	*E9	C2019	N8	C2520	*J4	C2759	*H9	C2850	*J8	C2976	*J6	C3067	E8	C3170	*M9	C3360	*M8	C3550	*N6	C4022	*J11	C4113	*H11	CL801	D8	CL3703	H10	E416	D7	IC801	A9
C229	N1	C521	N12	C1113	*E10	C2020	N8	C2521	*J4	C2760	*H9	C2851	*H9	C2977	*J5	C3068	D7	C3171	*M10	C3361	*M8	C3551	*M6	C4023	*J11	C4114	*J11	CL802	D8	CL3704	H10	E417	L12	IC802	E8
C230	L1	C522	N12	C1114	*E9	C2021	N8	C2522	*J4	C2761	*H9	C2852	*H8	C2978	*K6	C3069	*E7	C3172	*N9	C3362	*N8	C3552	*M5	C4024	*J11	C4115	*H11	CL803	D8	CL3705	H10	E418	P8	IC803	E8
C231	J1	C523	N12	C1201	M11	C2022	N8	C2523	*J4	C2762	*H8	C2853	*H9	C2979	*J5	C3070	*E7	C3173	*N9	C3363	*N8	C3553	*M6	C4025	*J11	C4116	*J11	CL804	D8	CL3706	H10			IC804	F7
C232	H1	C524	N12	C1202	E11	C2023	N8	C2524	*J4	C2763	*H8	C2854	*J8	C2980	*J5	C3071	*E8	C3174	*N9	C3364	*N8	C3554	*M6	C4026	*J10	C4117	*H11	CL805	D8	CL3707	H10	F201	R1	IC1002	A10
C233	L2	C525	N12	C1203	D11	C2024	N8	C2525	*J5	C2764	*H8	C2855	*J8	C2981	*J5	C3072	*E8	C3175	*M10	C3365	*N8	C3555	*M6	C4027	*J10	C4118	*H11	CL806	D8	CL3708	J9	F202	N1	IC1003	R11
C234	K2	C601	P4	C1204	L11	C2025	N8	C2526	*J5	C2765	*H8	C2856	*J8	C2982	*J5	C3073	*E8	C3176	*M9	C3366	*N8	C3556	*M6	C4028	*H10	C4119	*J11	CL807	D8	CL3709	J9	F203	L1	IC1004	P12
C235	H2	C602	*P4	C1205	E11	C2026	N8	C2601	G4	C2766	*H9	C2857	*J9	C2983	*J5	C3074	*E8	C3177	*N9	C3367	*N8	C3557	*N6	C4029	*J11	C4120	*J11	CL1601	*M10	CL3710	J9	F204	K1	IC1005	A10
C236	G2	C603	*P4	C1206	E11	C2027	N7	C2602	G5	C2767	*H9	C2858	*H8	C2984	*G6	C3075	*E8	C3178	*N9	C3368	*N8	C3558	*M6	C4030	*H11	C4121	*H10	CL1602	G9	CL3711	J11	F205	H1	IC1006	A8
C237	*L2	C604	*P4	C1207	L11	C2028	N8	C2603	H4	C2768	J10	C2859	*H9	C2985	*G5	C3076	*E8	C3179	*M9	C3369	*N8	C3559	*M6	C4031	*H11	C4122	*H11	CL1603	*M10	CL3712	J11			IC1007	C8
C238	*K2	C605	*P4	C1208	E11	C2029	N7	C2604	H5	C2769	*J10	C2860	*J8	C2986	*G6	C3077	*E8	C3180	*N9	C3370	*M7	C3560	*M6	C4032	*H11	C4123	*H11	CL1604	G9	CL3713	J11	FB201	P11	IC1008	C8
C239	*H2	C606	P4	C1209	E11	C2030	N7	C2605	*H4	C2770	*G8	C2861	*J9	C2987	*H6	C3078	*D8	C3181	*N9	C3371	*M8	C3561	*M6	C4033	*H11	C4124	*H11	CL1605	*N10	CL3714	J11	FB202	P4	IC1009	R12
C240	*F2	C607	P4	C1210	M11	C2031	N7	C2606	*H4	C2771	*G8	C2862	*J8	C2988	*H6	C3079	*D8	C3182	*M9	C3372	*N7	C3562	*N6	C4034	*H11	C4125	*H11	CL1606	G9	CL3715	H10	FB301	H4	IC1010	A10
C241	P12	C608	*P4	C1211	E11	C2032	N7	C2607	*G4	C2772	*K7	C2863	*J9	C2989	*G6	C3080	*E8	C3183	*M10	C3373	*N7	C3563	*N6	C4035	*H11	C4126	*H11	CL1607	*M10	CL3716	H10	FB401	M4	IC1011	C9
C242	N3	C609	P4	C1212	D11	C2101	N10	C2608	*G5	C2773	*K7	C2864	*H8	C2990	*G5	C3081	*E8	C3184	*N10	C3374	*N7	C3564	*N6	C4036	*J11	C4127	*H11	CL1608	G9	CL3717	H10	FB402	L4	IC1012	C9
C301	P11	C610	*P4	C1213	E11	C2102	N10	C2609	*G4	C2774	*J9	C2865	*H9	C2991	*G5	C3082	*E8	C3185	*N9	C3375	*M8	C3565	*N6	C4037	*H11	C4128	*J11	CL1609	*M8	CL3801	*J11	FB501	*P12	IC1013	A7
C302	F8	C611	*P4	C1214	E11	C2103	P10	C2610	G4	C2775	*J9	C2901	*J6	C2992	*G5	C3083	*E8	C3186	*M10	C3376	*M7	C3566	*N6	C4038	*J11	C4129	*J11	CL1610	*M8	CL3802	H11	FB601	*P4	IC1101	M12
C303	P11	C612	*P4	C1215	E11	C2104	P10	C2611	H4	C2776	*J9	C2902	*J5	C2993	*G6	C3084	*E8	C3187	*M9	C3377	*N7	C3567	*N6	C4039	*J11	C4130	*J11	CL1611	*N8	CL3803	J10	FB701	G11	IC1102	*D10
C304	F8	C613	*P4	C1216	E11	C2105	N10	C2612	H4	C2777	*J9	C2903	*J6	C2994	*G5	C3085	*D8	C3188	*M10	C3378	*N7	C3568	*N6	C4040	*J11	C4131	*J11	CL1612	*N8	CL3804	H10	FB702	G11	IC1103	*D10
C305	P10	C614	N4	C1301	D12	C2106	N10	C2613	H4	C2778	*J8	C2904	*J6	C2995	*H5	C3086	*D8	C3189	*M9	C3379	*M8	C3569	*N6	C4041	*J11	C4132	*J11	CL1613	N10	CL3805	J10	FB2701	*H8	IC1104	M12
C306	F8	C615	N4	C1302	M13	C2107	P10	C2614	H4	C2779	*J8	C2905	*J6	C2996	*G5	C3087	*D7	C3190	*M10	C3380	*N7	C3570	*M6	C4042	*H11	C4133	*J11	CL1614	N10	CL3806	H10	FB2702	*H9	IC1105	*E10
C307	H4	C616	N4	C1303	M13	C2108	P10	C2615	H5	C2780	*J9	C2906	*J6	C2997	*H6	C3088	*D7	C3191	*M9	C3381	*N7	C3571	*M6	C4043	*H11	C4134	*J11	CL1615	N10	CL3807	J12	FB2703	*H9	IC1201	M11
C308	P10	C617	N4	C1401	C11	C2109	N9	C2616	H5	C2781	*J9	C2907	*J5	C2998	*G6	C3101	*N10	C3192	*M10	C3382	*M8	C3572	*N6	C4044	*J10	C4135	*J11	CL1616	N10	CL3901	H11	FB2704	*H8	IC1202	E11
C309	F8	C618	N4	C1402	C11	C2110	N9	C2617	G4	C2782	*H8	C2908	*J5	C2999	*G6	C3102	*N9	C3193	*M9	C3383	*M8	C3573	*N6	C4045	*H10	C4136	*J11	CL1617	N10	CL3903	*H12	FB3101	*N10	IC1203	D11
C310	P10	C619	N4	C1403	B11	C2111	P9	C2618	G4	C2783	*J8	C2909	*J5	C3000	*G5	C3103	*N10	C3194	*M10	C3384	*N8	C3574	*N6	C4046	*J11	C4137	*H11	CL1618	N10	CL3904	*H12	FB3102	*N9	IC1204	E11
C311	G8	C620	N4	C1404	B11	C2112	P9	C2619	*H4	C2784	*H8	C2910	*J6	C3001	*G6	C3104	*M9	C3195	*M9	C3385	*N7	C3575	*M6	C4047	*J11	C4138	*J11	CL1619	N10	CL3905	*J12	FB3103	*N10	IC1301	M13
C312	H4	C621	N4	C1501	M10	C2113	N9	C2620	*H4	C2785	*J8	C2911	*J5	C3002	*G6	C3105	*N10	C3196	*M10	C3386	*M8	C3576	*M6	C4048	*J11	C4139	*H11	CL1620	N10	CL3906	*J12	FB3104	*N9	IC1302	D12
C313	H4	C622	N4	C1502	M8	C2114	N9	C2621	*G4	C2786	*H8	C2912	*J5	C3003	*G6	C3106	*N9	C3197	*M9	C3387	*M8	C3577	*N6	C4049	*H11	C4140	*H11	CL1621	N8			FB3301	*N8	IC1303	M13
C314	R10	C623	N4	C1503	M7	C2115	P9	C2622	*G4	C2787	*H8	C2913	*J5	C3004	*H5	C3107	*M9	C3198	*M10	C3388	*M8	C3578	*M6	C4050	*H11	C4141	*H11	CL1622	N8	CN901	C9	FB3302	*N8	IC1401	C11
C315	F11	C624	N4	C1504	J9	C2116	P9	C2623	*G4	C2788	*H8	C2914	*J6	C3005	*G5	C3108	*M9	C3199	*M9	C3389	*M7	C3579	*N6	C4051	*J11	C4142	*H11	CL1623	N8	CN1001	A8	FB3303	*N8	IC1402	C11
C316	H4	C625	N4	C1601	N10	C2201	*P3	C2624	*G4	C2789	*H8	C2915	*J6	C3006	*G6	C3109	*M9	C3200	*M10	C3390	*M8	C3580	*N6	C4052	*H11	C4143	*J11	CL1624	N8	CN1002	A7	FB3304	*N7	IC1403	B11
C317	R10	C626	N4	C1602	*G8	C2202	*P3	C2625	*G5	C2790	*H9	C2916	*J6	C3007	*G6	C3110	*M9	C3201	*M9	C3391	*M8	C3581	*N5	C4053	*H11	C4144	*H11	CL1625	N8	CN1701	A6	FB3501	*N6	IC1404	B11
C318	F11	C701	G11	C1603	N10	C2203	*P3	C2626	*G5	C2791	*H9	C2917	*J5	C3008	*G5	C3111	*N9	C3301	*N8	C3392	*M8	C3582	*M6	C4054	*J11	C4145	*J11	CL1626	N8	CN1901	A6	FB3502	*N6	IC1601	N10
C319	R10	C702	G11	C1604	*G8	C2204	*P3	C2701	*H8	C2792	*H9	C2918	*J6	C3009	*G5	C3112	*M9	C3302	*N8	C3393	*M7	C3583	*M6	C4055	*H11	C4146	*H11	CL1627	N8	CN1902	K11	FB3503	*N6	IC1602	*G8
C320	F11	C703	G11	C1605	N8	C2205	*P3	C2702	*H9	C2793	*H9	C2919	*J6	C3010	*G5	C3113	*M9	C3303	*N8	C3394	*M8	C3584	*N6	C4056	*J11	C4147	*H11	CL1628	N8			FB3504	*N6	IC1603	N8
C321	R10	C704	H8	C1606	N8	C2206	*P3	C2703	*H9	C2794	*H9	C2920	*J6	C3011	*G6	C3114	*M9	C3304	*M7	C3395	*M8	C3585	*N6	C4057	*J11	C4148	*J11	CL1629	N7	CNT1	R2	FB4001	*F10	IC1604	N7
C322	R10	C705	P12	C1607	N7	C2207	P3	C2704	*J7	C2795	*J9	C2921	*J5	C3012	*G6	C3115	*M9	C3305	*N9	C3396	*M8	C3586	*M6	C4058	*J11	C4149	*J11	CL1630	N7	CNV1	R4	FB4002	*G10	IC1701	B8
C323	F11	C706	R4	C1608	N7	C2208	P3	C2705	*J7	C2796	*J9	C2922	*J5	C3013	*G6	C3116	*M10	C3306	*N8	C3397	*M7	C3587	*M6	C4059	*J11	C4150	*J11	CL1631	N7	CNW1	R6			IC1702	B7
C324	M4	C707	R5	C1701	B8	C2209	P3	C2706	*H8	C2797	*H9	C2923	*J6	C3014	*G6	C3117	*M9	C3307	*M8	C3398	*M8	C3588	*M7	C4060	*H11	C4151	*H11	CL1632	N6	CNX1	R8	FL1701	*B8	IC1801	G7
C325	G11	C801	*E8	C1702	B8	C2210	P3	C2707	*H8	C2798	*H8	C2924	*J6	C3015	*G5	C3118	*N10	C3308	*M8	C3399	*M8	C3589	*M5	C4061	*J11	C4152	*J11	CL1633	N6	CNZ1	R12			IC1901	A6
C326	M4	C802	*E8	C1703	*B8	C2211	P3	C2708	*J8	C2799	*H8	C2925	*J5	C3016	*G5	C3119	*N9	C3309	*M8	C3400	*M8	C3590	*M6	C4062	*H11	C4153	*H11	CL1634	N7			IC1	E8	IC1902	B6
C327	M4	C803	*E8	C1704	B8	C2212	P3	C2709	*H8	C2800	*H9	C2926	*J5	C3017	*G6	C3120	*N10	C3310	*M8	C3401	*M7	C3591	*M6	C4063	*J11	C4154	*H11	CL1635	N6	D201	N2	IC2	M9	IC2201	P3
C328	F11	C804	A9	C1705	B8	C2213	P3	C2710	*H8	C2801	*H8	C2927	*J5	C3018	*G6	C3121	*N9	C3311	*N8	C3501	*N6	C3592	*M6	C4064	*J12	C4155	*J11	CL1636	N6	D202	R1	IC3	M8	IC2202	P3
C329	F11	C805	E8	C1706	B8	C2214	P3	C2711	*H9	C2802	*J8	C2928	*J6	C3019	*G6	C3122	*M9	C3312	*M8	C3502	*N6	C3593	*M5	C4065	H11	C4156	*H11	CL1637	*M6	D203	A3	IC4	M6	IC2501	J4
C330	F12	C806	E8	C1707	B8	C2215	P3	C2712	*H9	C2803	*H8	C2929	*J6	C3020	*G6	C3123	*M9	C3313	*M8	C3503	*N6	C3594	*M6	C4066	*H11	C4157	*H11	CL1638	*M6	D301	P10	IC5	H9	IC2502	*J4
C331	M4	C807	E8	C1708	B8	C2216	P3	C2713	*J9	C2804	*H8	C2930	*J6	C3021	*H5	C3124	*M9	C3314	*M8	C3504	*M5	C3595	*M6	C4067	*J11	C4158	*J11	CL1639	*N6	D302	G8	IC6	F10	IC2601	G4
C332	L4	C808	E8	C1709	*B8	C2217	P3	C2714	*H9	C2805	*H9	C2931	*J6	C3022	*H5	C3125	*M9	C3315	*M8	C3505	*N7	C3596	*M6	C4068	*H11	C4159	*F10	CL1640	*N6	D303	R10	IC7	H11	IC2602	*G4
C333	F12	C809	E8	C1710	B8	C2218	P3	C2715	*H9	C2806	*H9	C2932	*J5	C3023	*H5	C3126	*N10	C3316	*M8	C3506	*N6	C3597	*M6	C4069	*H11	C4160	*G10	CL2301	K6	D304	G11	IC8	J5	IC3900	H12
C334	G12	C810	E8	C1711	B8	C2219	P3	C2716	*H9	C2807	G8	C2933	*J5	C3024	*G5	C3127	*M10	C3317	*M7	C3507	*M6	C3598	*M6	C4070	*H11	C4161	*F10	CL2302	K6	D305	M4	IC9	G5	IC3901	J12
C335	F9	C811	E8	C1712	C8	C2220	P3	C2717	*H9	C2808	H8	C2934	*J5	C3025	*G5	C3128	*M10	C3318	*N8	C3508	*M6	C3599	*M6	C4071	*J11	C4162	*G10	CL2303	K6	D306	G12	IC201	A9		
C336	F9	C812	E8	C1713	*C8	C2221	P3	C2718	*J9	C2809	G8	C2935	*J5	C3026	*G5	C3129	*M10	C3319	*N8	C3509	*M6	C3600	*M6	C4072	*J11	C4163	F10	CL2304	K6	D307	F9	IC202	A8	L501	P12
C337	F8	C813	E8	C1714	C8	C2222	P3	C2719	*H8	C2810	G9	C2936	*J6	C3027	*G5	C3130	*M10	C3320	*N8	C3510	*M6	C3601	*M6	C4073	*J11	C4164	F10	CL2305	K6	D401	A4	IC301	P10	L601	P4
C338	F9	C814	E8	C1715	C8	C2223	R3	C2720	*H9	C2811	G9	C2937	*J6	C3028	*H6	C3131	*M10	C3321	*N8	C3511	*N6	C3801	F10	C4074	*J11	C4165	F9	CL2306	K5	D402	A4	IC302	F8	L1701	C7
C339	F9	C815	E7	C1716	*B8	C2224	R3	C2721	*J9	C2812	H9	C2938	*K5	C3029	*G5	C3132	*M9	C3322	*M8	C3512	*M6	C3802	F10	C4075	*H11	C4166	*F10	CL2307	K5	D403	A3	IC303	H4	L1702	B7
C401	M4	C901	*C9	C1717	*B8	C2225	R3	C2722	*J8	C2813	G9	C2939	*J6	C3030	*G6	C3133	*N10	C3323	*M8	C3513	*M6	C3901	*H12	C4076	*J10	C4167	*F10	CL2308	K5	D404	A3	IC304	R10	L1703	B7
C402	L4	C902	*B10	C1718	*B8	C2226	R3	C2723	*H8	C2814	G9	C2940	*K5	C3031	*G5	C3134	*N9	C3324	*M8	C3514	*M6	C3902	*H12	C4077	*H11	C4168	*F10	CL2309	K5	D405	M4	IC305	F11	L2701	*J8
C403	M4	C1001	C9	C1719	*B8	C2227	R3	C2724	*J9	C2815	H8	C2941	*J5	C3032	*G6	C3135	*N10	C3325	*M8	C3515	*M6	C3903	*H12	C4078	*H11	C4169	*F10	CL2310	K5	D406	L4	IC306	M4	L2702	*J8
C404	L4	C1002	R11	C1720	*C8	C2228	R3	C2725	*H8	C2816	*J9	C2942	*J5	C3033	*H5	C3136	*N10	C3326	*N8	C3516	*M6	C3904	*H12	C4079	*J11	C4170	*F9	CL2311	K5	D801	A10	IC307	F12	L2703	*J8
C405	M4	C1003	P12	C1721	*B8	C2229	P3	C2726	*H9	C2817	*H8	C2943	*J5	C3034	*H5	C3137	*N9	C3327	*M8	C3517	*M6	C3905	*H12	C4080	*H11	C4171	*F9	CL2312	J6	D802	A10	IC308	F9	L2704	*H9
C406	L4	C1004	A10	C1722	*B8	C2230	P3	C2727	*H9	C2818	*H8	C2944	*J5	C3035	*G5	C3138	*N10	C3328	*M8	C3518	*N6	C3906	*H12	C4081	*H11	C4172	*G10	CL2313	J6	D803	A9	IC401	M4	L2705	*H8
C407	N4	C1005	A8	C1723	C8	C2231	P3	C2728	*H8	C2819	*H9	C2945	*J6	C3036	*H6	C3139	*N10	C3329	*M8	C3519	*N6	C3907	*J12	C4082	*J11	C4173	*G10	CL2314	J6	D804	A9	IC402	L4	L2706	*H9
C408	L4	C1006	A8	C1724	C8	C2232	P3	C2729	*H8	C2820	*H9	C2946	*J6	C3037	*G5	C3140	*N9	C3330	*M8	C3520	*N6	C3908	*J12	C4083	*J11	C4174	*F10	CL2315	J6	D805	A9	IC403	*A4	L2901	*J6
C409	M4	C1007	C8	C1725	*B8	C2233	J8	C2730	*H8	C2821	*H9	C2947	*J6	C3038	*G6	C3141	*N10	C3331	*M8	C3521	*N6	C3909	*J12	C4084	*H11	C4175	*F10	CL2316	J6	D3801	A5	IC404	*A3	L2902	*J5
C410	L4	C1008	C8	C1726	*B7	C2234	J8	C2731	*H8	C2822	H8	C2948	*J5	C3039	*H6	C3142	*M10	C3332	*M8	C3522	*M6	C3910	*J12	C4085	*H11	C4176	*F10	CL2317	J6	D3802	A5	IC501	R12	L2903	*G6

L2904	*G5	R321	F11	R608	P4	R805	E8	R1605	M8	R1847	*H8	R2324	*H5	R2515	J4	R2743	G8	R3903	*H12	RB1115	*L12	RB2611	G4
L3101	*M10	R322	G11	R609	P4	R806	E8	R1606	M8	R1848	*H8	R2325	*J6	R2516	*J4	R2744	G9	R3904	*J12	RB1116	*L12	RB2612	*H4
L3102	*M9	R323	M4	R610	*P4	R807	E8	R1607	M7	R1849	*H8	R2326	H5	R2517	J4	R2745	G9	R3905	H11	RB1117	*L12	RB2613	*G5
L3103	*M10	R324	M4	R611	*P4	R808	E8	R1608	M7	R1850	*H8	R2327	*H5	R2518	*J4	R2746	G9	R3906	H11	RB1118	*L12	RB2614	G5
L3104	*M9	R325	M4	R612	*P4	R809	E8	R1701	B8	R1851	*F10	R2328	*H5	R2519	J5	R2747	G9	R3907	H12	RB1119	*E9	RB2615	G5
L3301	*M8	R326	M4	R613	P4	R810	E8	R1702	B8	R1852	*F10	R2329	*K5	R2520	*J5	R2748	G9	R3908	H12	RB1120	*E9	RB2616	G5
L3302	*M8	R327	F11	R614	*P4	R811	E8	R1703	B8	R1853	*F10	R2330	*K6	R2521	J4	R2749	G9	R3909	*J11	RB1121	*E10	RB2617	G5
L3303	*M8	R328	L4	R615	*P4	R812	E8	R1704	B8	R1854	*F10	R2331	*H6	R2522	*J4	R2750	G9	R3910	*J11	RB1122	*E10	RB3801	*A5
L3304	*M7	R329	F12	R616	*P4	R813	*E8	R1705	*B8	R1855	*F10	R2332	*H5	R2523	J4	R2751	G9	R3911	J11	RB1201	M11	RB3802	*A5
L3501	*M6	R330	F12	R617	*P4	R814	E7	R1706	B8	R1856	*F10	R2333	*H6	R2524	*J4	R2752	G9	R3912	J11	RB1202	M11		
L3502	*M6	R331	F12	R618	*P4	R815	E7	R1707	*B8	R1901	*K11	R2334	H6	R2525	J4	R2753	G9	R3913	*H12	RB1203	M11	S201	A8
L3503	*M7	R332	F12	R619	*P4	R816	D7	R1708	*B8	R1902	*K11	R2335	H6	R2526	*J4	R2754	G9	R3914	*J11	RB1204	M12	S901	A9
L3504	*M5	R333	F12	R620	*P4	R817	D7	R1709	*B8	R1903	*K11	R2336	H6	R2527	J4	R2755	G9	R3915	H12	RB1205	L11		
L4001	*J11	R334	F12	R621	N4	R818	E7	R1710	C8	R1904	A6	R2337	*H6	R2528	*J4	R2756	G9	R3916	J12	RB1206	L11	SL301	P11
L4002	*J12	R335	G12	R622	N4	R819	E7	R1711	C8	R1905	*K11	R2338	H6	R2529	J5	R2757	G9	R4001	*J11	RB1207	L11	SL302	G8
L4003	*H12	R336	F9	R623	N4	R820	E8	R1712	C8	R1906	A6	R2339	H6	R2530	*J5	R2758	G8	R4002	*J12	RB1208	L12	SL304	R10
L4004	*H11	R337	F9	R624	N4	R821	*E7	R1713	C8	R1907	*K11	R2340	H6	R2531	J5	R2759	H8	R4003	*H12	RB1209	*L11	SL305	G11
L4005	*J11	R338	F8	R626	N4	R822	E8	R1714	C8	R1908	A6	R2341	H6	R2532	*J5	R2764	*H9	R4004	*H11	RB1210	*L11	SL306	M4
		R339	F9	R701	M10	R823	*E7	R1715	*B8	R1909	A6	R2342	H6	R2533	J5	R2765	*H9	R4005	*J11	RB1211	*L11	SL307	G11
Q201	N2	R340	F8	R702	M7	R824	*E8	R1716	*B8	R1910	*K11	R2343	*H5	R2534	*J5	R2766	*H9			RB1212	*L12	SL308	F9
Q202	N2	R341	F9	R703	*N10	R825	*E8	R1717	B7	R1911	A5	R2344	G5	R2601	H5	R2767	*H9	RB801	E7	RB1213	E11		
Q203	N2	R342	F8	R704	*N10	R826	E8	R1718	B7	R1912	A6	R2345	*G5	R2602	G5	R2768	*H8	RB802	E7	RB1214	E11	TP201	A3
Q204	N2	R343	F9	R705	M8	R827	E8	R1719	*B8	R1913	A6	R2346	*G5	R2603	G5	R2769	*G8	RB803	E7	RB1215	E11	TP202	A3
Q205	N2	R344	F8	R706	*N8	R828	E8	R1720	*B8	R1914	A6	R2347	*G5	R2604	*G5	R3103	*N10	RB804	E8	RB1216	E10	TP203	A4
Q401	M4	R345	F9	R707	*N8	R829	E8	R1721	*B8	R1915	A6	R2348	*G5	R2605	*G5	R3104	*N9	RB805	E7	RB1217	*E11	TP204	A4
Q402	L4	R346	F8	R708	*N6	R830	E8	R1722	*B8	R1916	A6	R2349	*G6	R2606	G5	R3105	*N9	RB806	D8	RB1218	*E11	TP205	A3
Q403	A4	R347	F9	R709	*N6	R831	E8	R1723	B7	R1917	A6	R2350	G5	R2607	G5	R3106	*N10	RB807	E7	RB1219	*E11	TP301	P10
Q404	A4	R348	F8	R710	*N9	R832	*D7	R1724	B7	R1918	B6	R2351	*G5	R2608	G5	R3107	*N9	RB808	D7	RB1220	*E10	TP302	G8
Q405	A4	R349	F9	R711	*N7	R833	A10	R1725	*C7	R1919	B6	R2352	*G5	R2609	G5	R3108	*N9	RB809	E8	RB1301	M13	TP303	R10
Q406	A4	R350	F8	R712	*N6	R834	A10	R1726	*B7	R1920	B6	R2353	*H5	R2610	G5	R3109	*M10	RB810	D8	RB1302	M13	TP304	G11
Q407	A3	R351	F9	R713	G11	R835	A9	R1727	*B7	R1921	B6	R2354	*H6	R2611	G4	R3110	*M9	RB811	*E7	RB1303	*L13	TP305	L4
Q408	A3	R352	F9	R714	H11	R836	A9	R1728	*B8	R1922	B6	R2401	J8	R2612	*H4	R3111	*N9	RB812	E7	RB1304	*L13	TP306	G11
Q409	A3	R401	M4	R715	N7	R837	A9	R1729	*B7	R1923	B6	R2402	J8	R2613	G4	R3112	*N9	RB813	*D7	RB1305	L13	TP307	F9
Q410	A3	R402	L4	R716	N5	R838	*D7	R1730	*B7	R1924	B6	R2403	J8	R2614	*H4	R3113	*N10	RB814	E8	RB1306	L13	TP401	N4
Q501	*N12	R403	M4	R717	N9	R839	E7	R1731	*C7	R1925	B6	R2404	J8	R2615	H4	R3114	*N10	RB815	E8	RB1401	*C11	TP402	L4
Q502	*N12	R404	*A3	R718	M9	R840	E8	R1732	*C7	R1926	*M9	R2405	*H8	R2616	*G4	R3303	*N8	RB816	*E8	RB1402	*C11	TP701	N13
Q503	*N12	R405	*A3	R719	M9	R841	E8	R1733	*B7	R1927	G10	R2406	*H8	R2617	G4	R3304	*N7	RB817	*E8	RB1403	*B11	TP702	N13
Q601	*P4	R406	*A3	R720	M9	R842	D7	R1734	*B7	R1928	*N10	R2407	H8	R2618	*H4	R3305	*N7	RB818	E8	RB1404	*B11	TP703	N13
Q602	*N4	R407	*A3	R721	H11	R843	D7	R1735	*B7	R1929	G10	R2408	H8	R2619	H5	R3306	*N8	RB819	E8	RB1801	*G7	TP704	N12
Q603	*N4	R408	*A3	R722	H11	R844	D7	R1736	*B7	R1930	J10	R2409	H8	R2620	*G5	R3307	*N7	RB901	C10	RB1802	*G7	TP705	N4
Q604	*N4	R409	*A3	R723	H8	R845	D7	R1737	*B7	R1931	A5	R2410	*H8	R2621	H4	R3308	*N7	RB902	C10	RB2401	J8	TP706	P4
		R410	A4	R724	*H9	R846	E8	R1738	*B7	R1932	A5	R2411	*J6	R2622	*G4	R3309	*M8	RB903	B10	RB2402	J8	TP707	N4
R201	A9	R411	A4	R725	H8	R847	E8	R1739	*B7	R1933	*N8	R2412	*K6	R2623	H4	R3310	*M7	RB904	B10	RB2403	J8	TP708	P4
R202	N2	R412	A4	R726	G8	R848	D8	R1740	*B7	R1934	*M9	R2413	*K6	R2624	*G4	R3311	*N7	RB905	B10	RB2404	J8	TP709	N4
R203	N2	R413	*A4	R727	*H9	R849	D8	R1741	*B8	R1935	A5	R2414	J6	R2625	H4	R3312	*N8	RB906	B10	RB2405	H6	TP710	P4
R204	A3	R414	*A4	R728	N12	R850	D8	R1801	*M10	R1937	N7	R2415	*K5	R2626	*G4	R3313	*N8	RB907	B10	RB2406	H6	TP711	N4
R205	A3	R415	*A4	R729	N13	R851	E8	R1802	*N10	R1938	J10	R2416	*K5	R2627	G4	R3314	*N8	RB908	B10	RB2407	J6	TP712	P4
R206	A3	R416	A4	R730	P13	R852	E8	R1803	*N10	R1939	*K11	R2417	J6	R2628	*H4	R3503	*N6	RB909	C10	RB2408	J6	TP1001	D8
R207	A8	R417	A4	R731	P13	R853	E8	R1804	*N10	R1940	*K11	R2418	J6	R2629	G5	R3504	*N6	RB910	C10	RB2409	J6		
R208	*N2	R418	A4	R732	N13	R854	D7	R1805	*N10	R2001	J9	R2419	J6	R2630	*H5	R3505	*N6	RB911	B10	RB2410	H5	X501	N12
R209	*L2	R419	*A3	R733	N13	R855	*E8	R1806	*N10	R2002	J9	R2420	K6	R2631	G5	R3506	*N6	RB912	B10	RB2411	H6	X502	N12
R210	*J2	R420	*A3	R734	N12	R901	*C10	R1807	*N10	R2003	M6	R2421	K6	R2632	*H5	R3507	*N6	RB913	B10	RB2412	H6	X503	N12
R211	*H2	R421	*A3	R735	N12	R902	*C10	R1808	*N10	R2004	M8	R2422	H6	R2633	G5	R3508	*N6	RB914	B10	RB2413	H8	X601	N4
R212	*J2	R422	*A3	R736	P4	R903	C10	R1809	*N10	R2101	M9	R2423	H6	R2634	*H5	R3509	*M6	RB915	B10	RB2414	H8	X602	N4
R213	*G2	R423	A3	R737	P4	R904	C10	R1810	*M8	R2201	P3	R2424	J6	R2703	H8	R3510	*M6	RB916	B10	RB2415	H7	X603	N4
R214	*M2	R424	A4	R738	R4	R1001	R11	R1811	*N8	R2202	P3	R2425	H6	R2704	H8	R3511	*N6	RB917	C10	RB2416	H7	X701	G11
R215	*M2	R425	A4	R739	R4	R1002	C9	R1812	*N8	R2203	P3	R2426	H8	R2705	G8	R3512	*N6	RB918	C10	RB2417	G6	X1701	C8
R216	*K2	R426	*A3	R740	P5	R1003	B10	R1813	*N8	R2204	P3	R2427	H8	R2706	H8	R3513	*N6	RB919	C10	RB2418	G6		
R217	*K2	R427	*A3	R741	P5	R1004	B10	R1814	*N8	R2205	R3	R2428	H7	R2707	G8	R3514	*N6	RB920	C10	RB2419	G6		
R218	*J2	R428	*A3	R742	R5	R1005	A10	R1815	G7	R2206	R3	R2429	H7	R2708	H8	R3701	G11	RB921	C10	RB2420	G6		
R219	*J2	R429	A3	R743	R5	R1006	R11	R1816	*N8	R2207	P3	R2430	H8	R2709	G8	R3702	G11	RB922	C10	RB2421	G6		
R220	*G2	R430	A3	R744	N9	R1007	C8	R1817	*N8	R2208	P3	R2431	*H8	R2710	H8	R3703	G11	RB923	C10	RB2422	G5		
R221	*G2	R431	A3	R745	M9	R1008	C9	R1818	*N8	R2209	P3	R2432	*G6	R2711	G8	R3704	G11	RB924	C10	RB2423	G6		
R222	*M2	R432	L4	R746	N9	R1009	A10	R1819	*N8	R2210	P3	R2433	*H6	R2712	H8	R3705	*J11	RB925	C10	RB2424	G6		
R223	*M2	R501	R12	R747	M9	R1010	C8	R1820	*M8	R2211	P3	R2434	*H6	R2713	G8	R3706	*H9	RB926	C10	RB2501	K5		
R224	*K2	R502	*R12	R748	N9	R1011	C8	R1821	G7	R2212	P3	R2435	H6	R2714	G9	R3801	F10	RB927	C10	RB2502	J5		
R225	*K2	R503	P12	R749	M9	R1012	C8	R1822	G7	R2213	J8	R2436	*H5	R2715	H9	R3802	F10	RB928	C10	RB2503	J5		
R226	A3	R504	P12	R750	N9	R1013	C8	R1823	G7	R2214	J8	R2437	*H5	R2716	H9	R3803	*H11	RB929	C10	RB2504	J5		
R227	A4	R505	*P12	R751	M9	R1014	R11	R1824	G7	R2301	H8	R2438	G6	R2717	G9	R3804	*H11	RB930	C10	RB2505	*J5		
R228	A4	R506	*P12	R752	M9	R1015	C8	R1825	G7	R2302	H8	R2439	G6	R2718	H9	R3805	*H11	RB931	C10	RB2506	*J5		
R229	A3	R507	*P12	R753	N5	R1016	C8	R1826	G7	R2303	*H8	R2440	G6	R2719	G9	R3806	*H11	RB932	C10	RB2507	*J5		
R301	P11	R508	P12	R754	N5	R1017	C8	R1827	G7	R2304	*H8	R2441	H6	R2720	H9	R3807	*H11	RB933	D10	RB2508	*K5		
R302	F8	R509	*P12	R755	N5	R1018	D8	R1828	G8	R2305	*J8	R2442	H6	R2721	G9	R3808	*H11	RB934	D10	RB2509	J4		
R303	P10	R510	*P12	R756	N5	R1019	D8	R1829	*M8	R2306	*H8	R2443	G6	R2722	H9	R3809	*H11	RB935	C10	RB2510	*J4		
R304	P10	R511	*P12	R757	P5	R1020	D8	R1830	*M6	R2307	*K6	R2444	G6	R2723	G9	R3810	*H11	RB936	C10	RB2511	J4		
R305	F8	R512	*P12	R758	P5	R1021	D8	R1831	*N6	R2308	*K5	R2445	G6	R2724	H9	R3811	*J11	RB937	C10	RB2512	*J4		
R306	F8	R513	*P12	R759	P5	R1022	*R13	R1832	*N6	R2309	*K6	R2446	G6	R2725	H9	R3812	*J11	RB1001	B10	RB2513	*J5		
R307	P10	R514	*P12	R760	P5	R1023	*R12	R1833	*N6	R2310	K6	R2501	J5	R2726	G9	R3813	*H11	RB1101	M12	RB2514	H5		
R308	F8	R515	*P12	R761	N7	R1024	A7	R1834	*N6	R2311	K6	R2502	J5	R2727	H9	R3814	*J11	RB1102	M12	RB2515	H5		
R309	P10	R516	N12	R762	N7	R1025	A7	R1835	*N7	R2312	K6	R2503	J5	R2728	G8	R3815	H11	RB1103	M12	RB2516	J5		
R310	G8	R517	N12	R763	N7	R1301	M13	R1836	*N7	R2313	*K6	R2504	*J5	R2729	H8	R3816	*H11	RB1104	M12	RB2517	J5		
R311	R10	R518	N12	R764	N7	R1501	M10	R1837	*N7	R2314	K6	R2505	*J5	R2733	G8	R3817	*H11	RB1105	M12	RB2601	H5		
R312	F11	R519	N12	R765	N5	R1502	M8	R1838	*N7	R2315	K6	R2506	J5	R2734	G8	R3818	*H11	RB1106	M12	RB2602	H5		
R313	R10	R520	N12	R766	N5	R1503	M7	R1839	*M6	R2316	K6	R2507	J5	R2735	G8	R3819	H11	RB1107	*L12	RB2603	G5		
R314	R10	R601	R4	R767	N5	R1504	J9	R1840	*M6	R2317	K6	R2508	J5	R2736	G8	R3820	*H11	RB1108	L12	RB2604	G5		
R315	F11	R602	R4	R768	N5	R1505	H9	R1841	*J8	R2318	K6	R2509	J5	R2737	G8	R3821	*H11	RB1109	*L12	RB2605	*G5		
R316	F11	R603	*R4	R769	M9	R1506	H9	R1842	*J8	R2319	*K5	R2510	J5	R2738	G8	R3822	H11	RB1110	L12	RB2606	*G5		
R317	R10	R604	*R4	R801	*E8	R1601	M10	R1843	*H8	R2320	H5	R2511	J4	R2739	G8	R3823	G10	RB1111	L12	RB2607	*H5		
R318	F11	R605	*P4	R802	*E8	R1602	*G8	R1844	*H8	R2321	*H5	R2512	*J4	R2740	G8	R3824	F9	RB1112	L12	RB2608	*H5		
R319	R10	R606	*P4	R803	*E8	R1603	M10	R1845	*H8	R2322	*H5	R2513	J4	R2741	G8	R3901	*H12	RB1113	L12	RB2609	H4		
R320	F11	R607	*P4	R804	*E8	R1604	*G8	R1846	*H8	R2323	*H5	R2514	*J4	R2742	G8	R3902	*J12	RB1114	L12	RB2610	*G4		

Components locations list; previous page

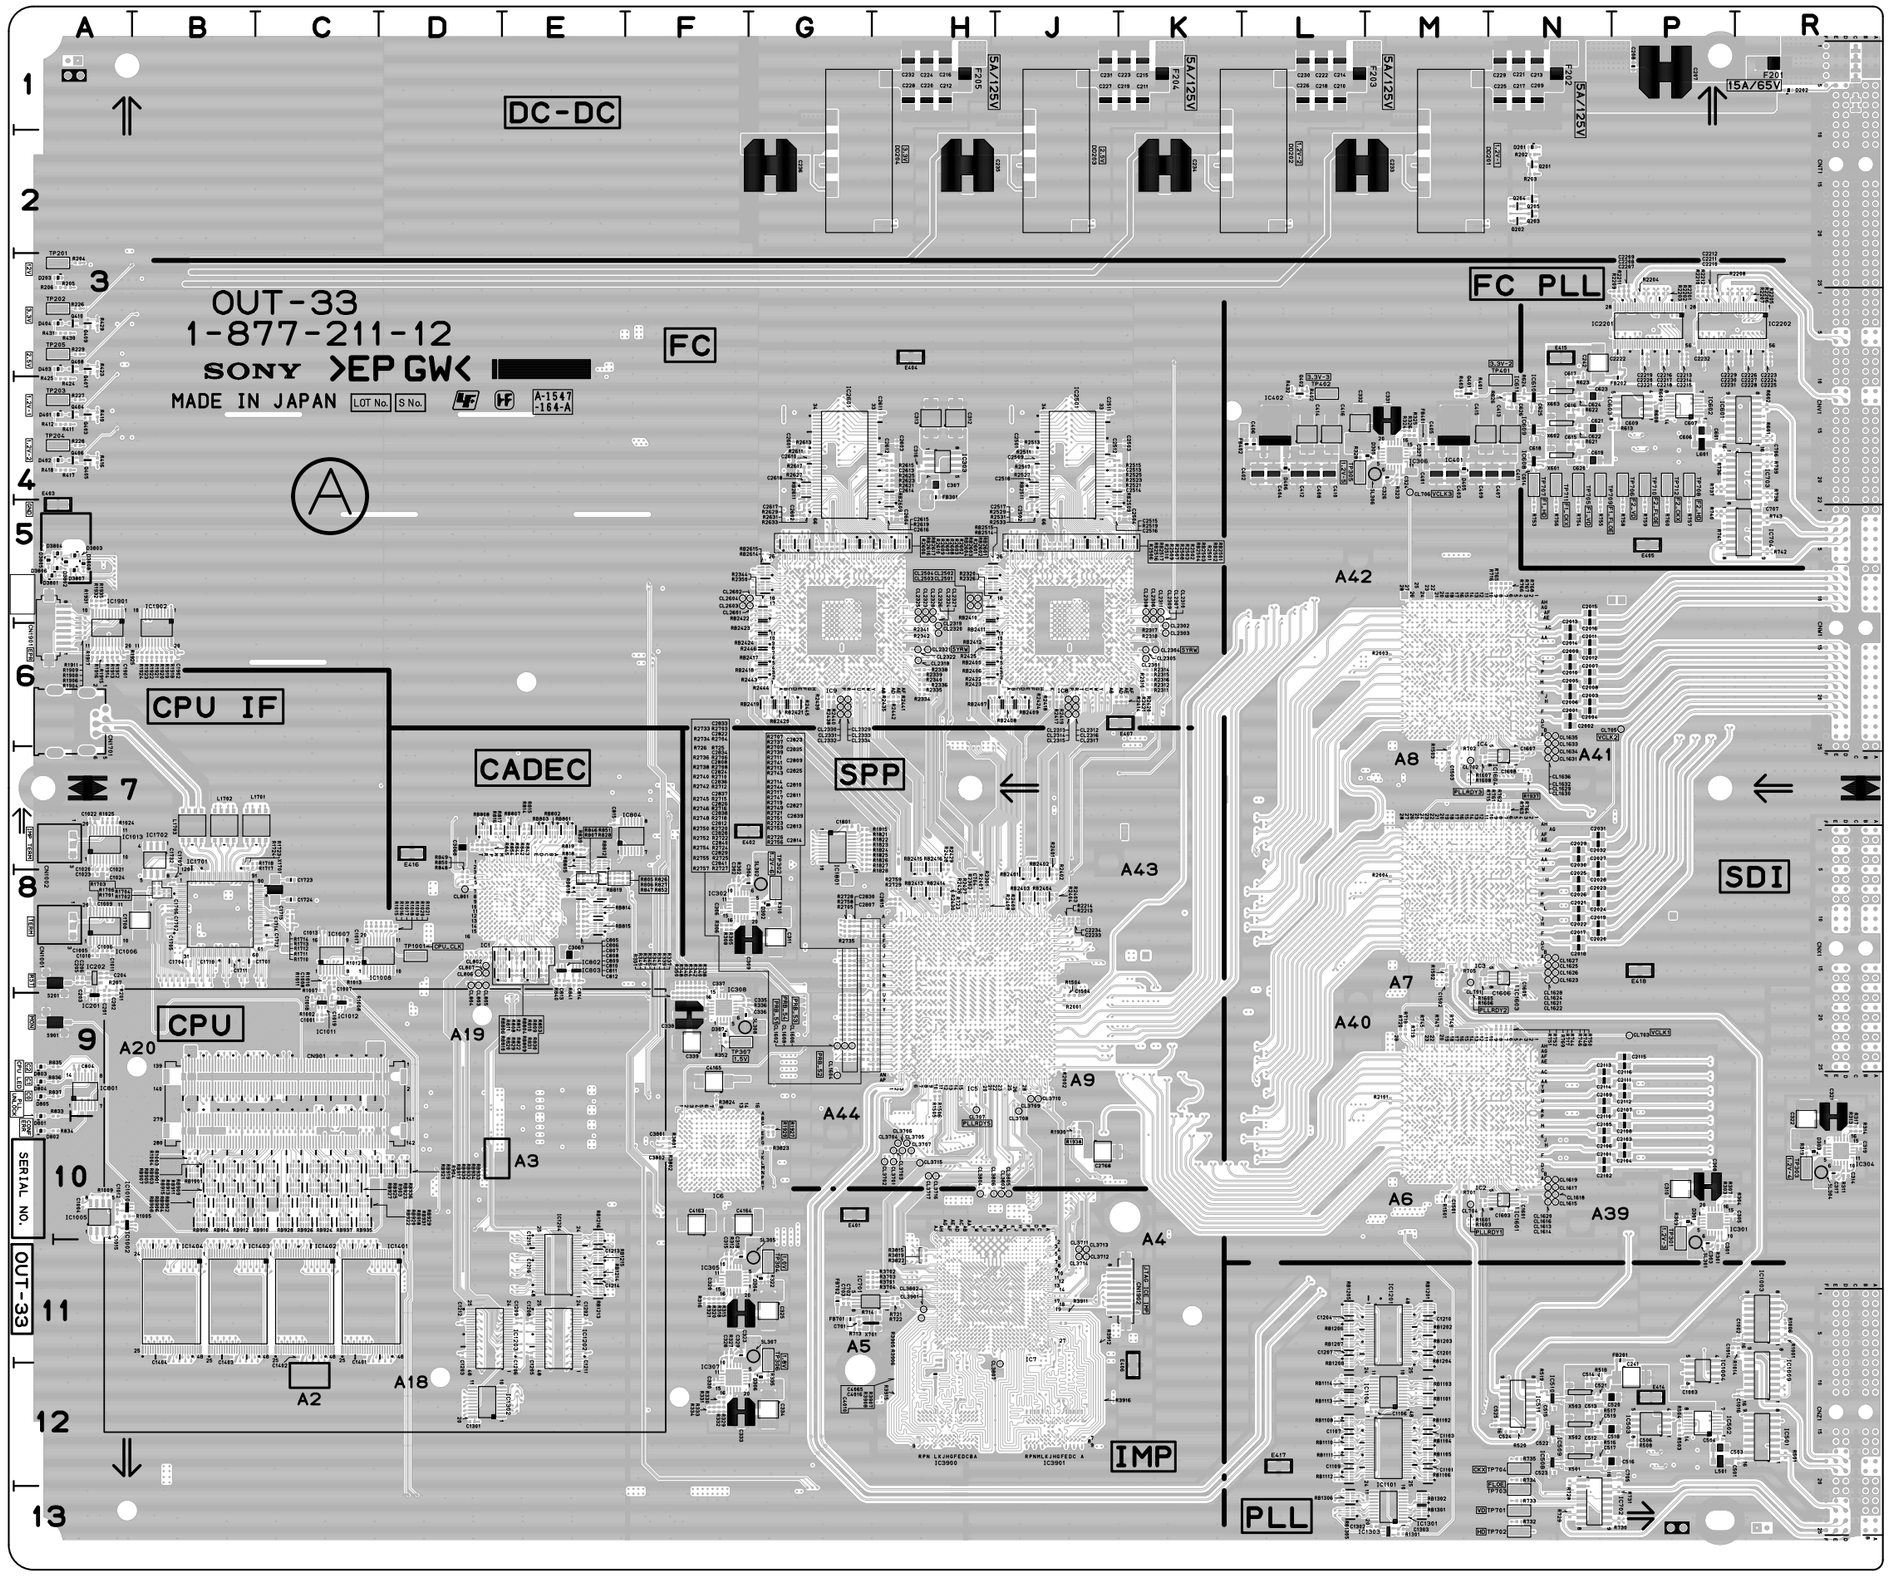


OUT-33 -A SIDE-
SUFFIX: -12

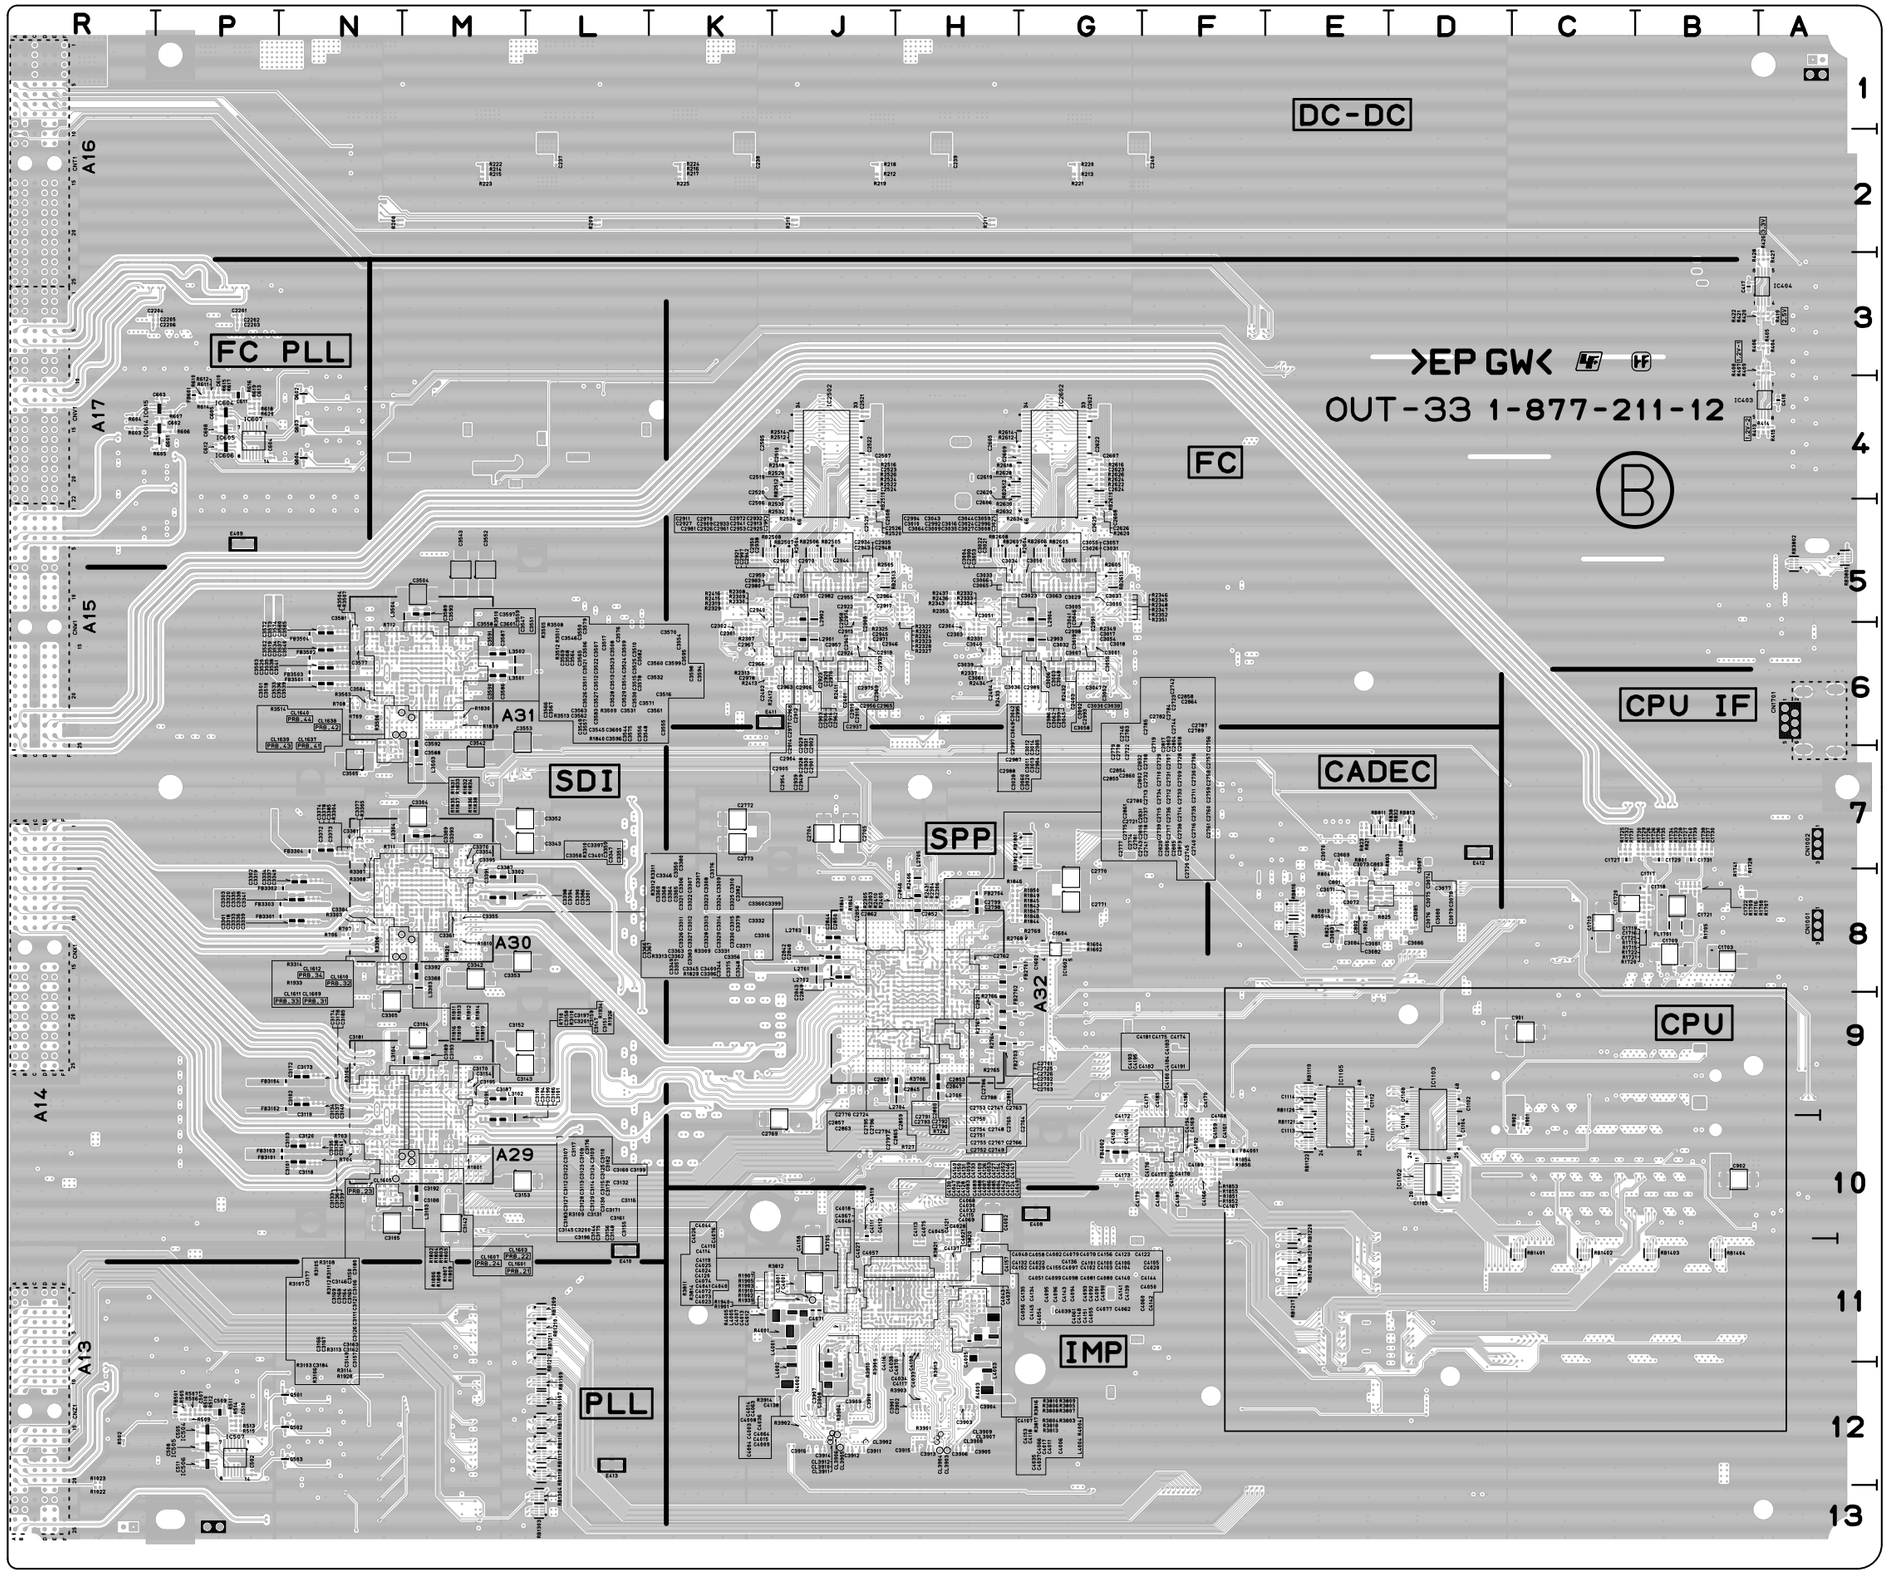


OUT-33 -B SIDE-
SUFFIX: -12

SG-272 (1-681-842-22)
---
*:B SIDE

C100	A2	CL106	*B1	R200	*B1
C101	A2	CL107	*A1	R201	*A1
C102	A2	CL108	*A1	R202	*B1
C103	A2	CL109	*A1	R203	*B1
C104	A2	CL110	*A1	R204	*B1
C105	A2	CL111	*A1	R205	*B1
C106	A2	CL200	*B2	R206	B2
C107	A2	CL300	B1	R207	B2
C109	A2	CL301	B1	R208	B2
C110	A2	CL302	B1	R209	B2
C111	A2	CL303	B1	R210	B1
C112	*A2			R211	B1
C113	A2	CN1	A1	R212	*A2
C114	*A1	CN2	B2	R213	B2
C115	*A2	CN3	B1	R214	B2
C116	*A2			R215	B1
C117	A2	D100	B1	R216	*B2
C200	A2	D101	B1	R217	*B2
C201	B2	D102	A2	R218	*B2
C202	B2	D200	B1	R219	*A2
C203	B2	D300	A1	R220	*B2
C204	B2	D301	A1	R221	*B2
C205	B2	D302	A1	R222	*B2
C206	*B2	D303	A1	R223	*B2
C207	B2			R224	*B2
C208	B2	E1	A2	R225	*B2
C209	B1	E2	B1	R226	A2
C210	*A2			R227	*A2
C211	*A2	F300	A1	R228	B2
C212	*A2			R229	*B2
C213	A2	IC100	A2	R230	*B2
C214	B2	IC101	A2	R231	*B1
C215	B2	IC103	A2	R232	B2
C216	B1	IC106	A2	R233	B1
C217	B1	IC113	B1	R234	B1
C218	B1	IC115	A1	R235	B1
C219	B1	IC200	B2	R236	*B2
C220	B1	IC201	B2	R237	*B2
C221	B1	IC204	A2	R238	*B2
C222	B2	IC206	B2	R239	*B1
C223	B2	IC207	B2	R240	*B2
C224	*A2	IC208	B2	R243	*B2
C225	B2	IC300	A1	R244	*B1
C226	B1	IC302	B1	R245	*B1
C227	A2	IC303	A1	R246	*B1
C228	B2	IC305	B1	R300	*B1
C229	*B2	IC306	A1	R301	*A1
C230	*B2			R302	*A1
C231	*B2	L101	A2	R303	*B1
C232	*B2	L102	A2	R304	*A1
C233	B1	L103	A2	R305	*A1
C234	B1	L200	B2	R306	*B1
C235	B2	L201	B2	R307	*B1
C300	A1	L202	A2	R308	*A1
C302	*B1	L206	B2	R309	*A1
C303	*A1	L300	A1	R312	*A1
C304	*A1				
C305	A1	Q100	A2	RB200	B2
C306	*B1	Q201	*B1	RB201	B2
C307	*A1	Q202	*B1	RB202	B2
C308	*B1	Q203	*B1	RB300	B1
C309	A1			RB302	B1
C311	*A1	R100	A2		
C312	*B1	R101	A2	X200	B1
C313	*A1	R102	A2	X201	B1
C315	B1	R103	A2	X202	B1
C316	B1	R104	A2		
C317	*B1	R105	A2		
C318	*A1	R106	A2		
C319	*A1	R111	A2		
C320	*A1	R112	A2		
C321	*A1	R113	A2		
C322	*B1	R114	A1		
C323	*B1	R115	A2		
C324	*B1	R116	A2		
C325	*A1	R117	A2		
C326	*A1	R118	*A2		
C327	*A1	R119	*B1		
C328	*B1	R120	*B1		
C329	*B1	R121	*B1		
C330	*B1	R123	A2		
C331	*B1	R124	A2		
C332	*B1	R125	A2		
C333	A1	R126	A2		
C334	A1	R127	A2		
		R128	A2		
CL100	*A1	R129	A2		
CL101	*A1	R130	A2		
CL102	*A1	R131	A2		
CL103	*A1	R132	A2		
CL104	*A1	R133	A2		
CL105	*B1	R134	A2		

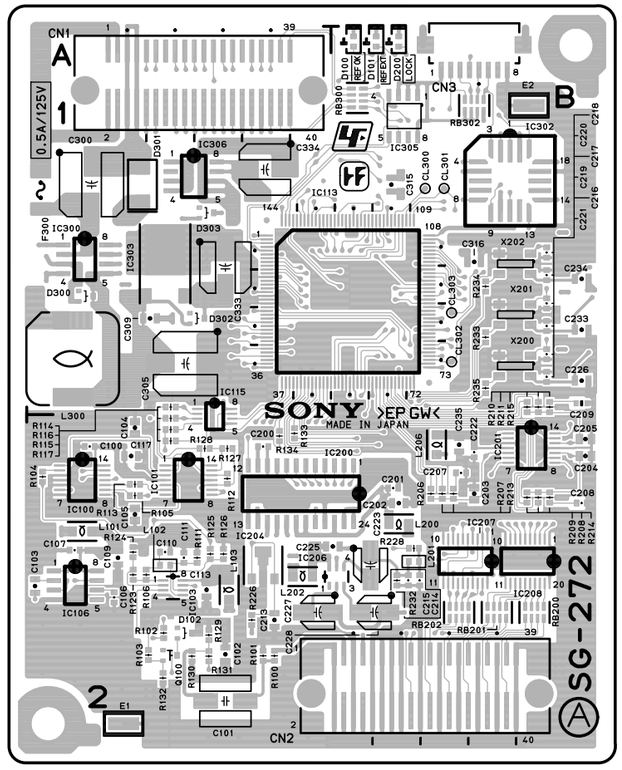


SG-272 -A SIDE-
SUFFIX: -22

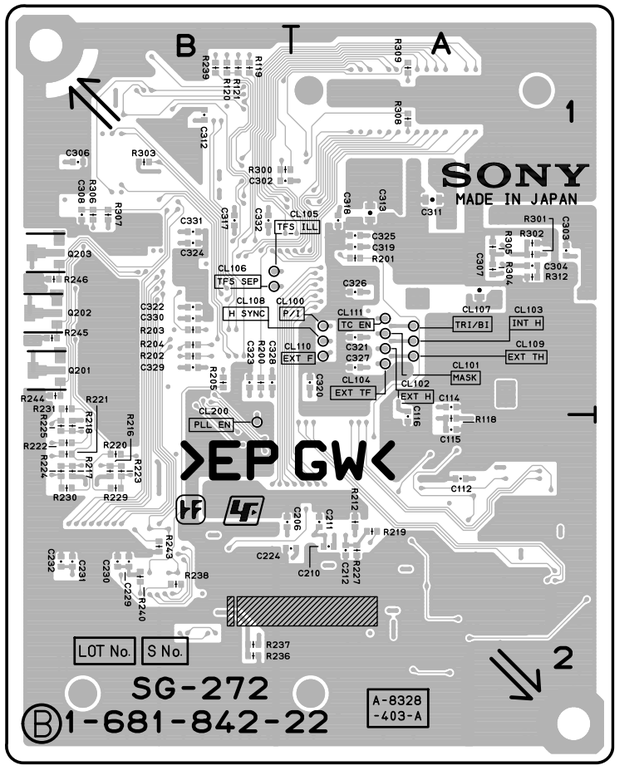


SG-272 -B SIDE-
SUFFIX: -22

SIO-26 (1-862-225-11)
---
*:B SIDE

C100	*D5	R302	*D2
C101	D4	R400	E2
C102	D4	R401	*C2
C103	*E3	R402	*C2
C104	D3	R403	*E2
C105	C3	R404	*B4
C106	C3	R405	*B4
C400	E2	R406	*B4
C401	B4	R415	*C2
C402	B4	R416	*C2
C403	B4	R417	*C2
C404	A4	R418	E4
C405	*F3	R419	E4
C406	*F3	R420	E4
C407	*F3	R421	*C2
C408	*F1	R422	*E2
C409	G3	R423	E1
C410	*D3	R424	E1
C411	*C2	R425	D1
C413	*D3	R426	D1
C414	*D2	R427	*G1
C415	*D2	R428	*G1
C416	*D2	R429	*B2
C417	*D2	R430	*B2
C418	*D2	R500	*A3
C423	D3	R501	*B2
C424	*C1	R502	G3
C425	*E1	R503	*B1
C426	*E3	R504	G4
C500	*B2		
C501	*B2	RB100	D3
C502	*A3	RB101	D3
C503	*B3	RB102	D3
C504	*B1	RB103	C3
C505	*A3	RB104	C3
C506	*B1	RB105	C3
C507	*B1	RB106	C3
C508	G4	RB200	*A3
C509	G4	RB400	*F4
C510	*B2	RB401	F4
C511	G3	RB402	E4
C512	*B1	RB403	*E3
C513	G4	RB500	*G2
C514	*B1		
C515	G3	S300	A3
C516	*F2	S500	A2
CL201	C2	TP100	D4
CL202	C3	TP400	B4
CL400	C3	TP401	A4
CN100	*C4	X400	E2
CN400	E4		
CN500	A2		
CN501	A1		
CN502	F4		
CN503	G4		
D200	A4		
D201	A3		
D202	A3		
E402	F4		
E403	F1		
E404	C4		
IC100	*D3		
IC101	*D3		
IC102	*C3		
IC103	*C3		
IC104	*C4		
IC200	D2		
IC401	B4		
IC402	F3		
IC410	F1		
IC411	G3		
IC500	B3		
IC501	B1		
IC502	*A3		
IC503	*B1		
IC504	G4		
IC505	F2		
R100	D4		
R102	E4		
R103	C4		
R200	*A3		
R201	*A3		
R202	*C2		
R203	*C1		
R300	*A3		
R301	*A3		

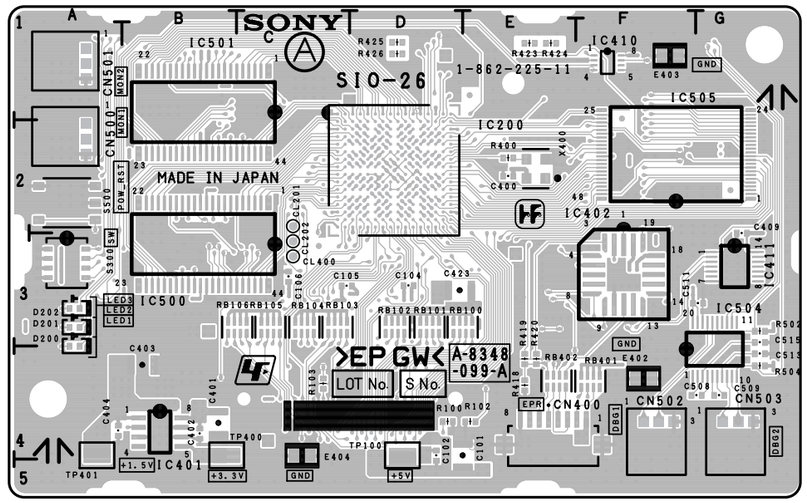

SIO-26 -A SIDE-
SUFFIX: -11

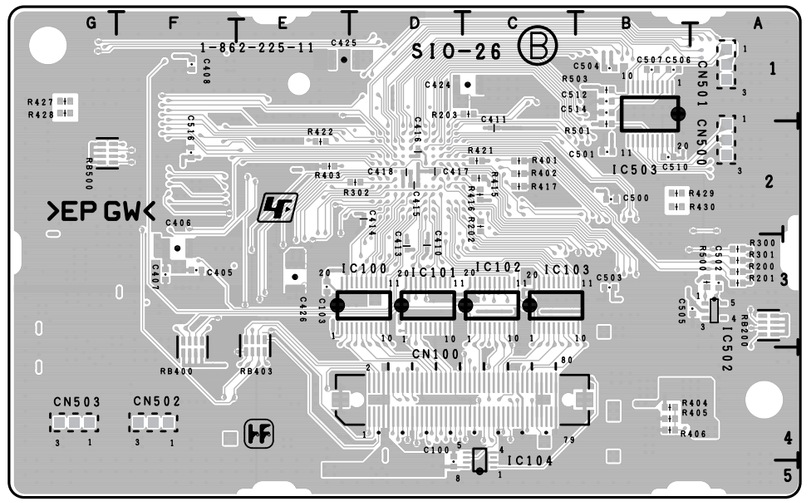


SIO-26 -B SIDE-
SUFFIX: -11

XPT-29 (1-871-710-11)
---
*:B SIDE


C1	L1	C325	L12	C1406	*K4	C3010	H2	C3324	D11	C4130	G5	C5012	E6	C5144	D6	CL604	A8	IC2001	K9	R9	C4	R225	B10	R449	*A9	R1026	*K1	R1158	*J2	R1330	*J3	R1502	*J4	R2054	K9
C2	K1	C327	L12	C1407	K4	C3011	H2	C3325	D11	C4131	*G5	C5013	F5	C5145	*D6			IC2002	*K9	R10	B7	R226	B10	R450	*B9	R1027	J2	R1159	*J2	R1331	J3	R1503	K5	R2055	K9
C3	C1	C329	K7	C1408	*K4	C3012	H2	C3326	D11	C4132	*G5	C5014	*F5	C5146	*D5	CN501	A6	IC2003	J9	R11	*C2	R227	B10	R451	*B9	R1028	*J1	R1160	*J2	R1332	*J3	R1504	*K5	R2056	K9
C4	C1	C401	B9	C1409	J4	C3013	H2	C4001	J5	C4133	G6	C5015	F6	C5147	D6			IC2004	*J9	R12	*C2	R228	A10	R452	*B9	R1029	K2	R1201	K3	R1333	K3	R1505	J4	R2057	*K9
C5	C1	C402	*B8	C1410	*J4	C3014	*G2	C4002	J5	C4134	G6	C5016	F5	C5148	*D6	CNT1	L2	IC2005	K9	R13	*C2	R229	*L1	R453	*B9	R1030	*K2	R1202	*K3	R1334	*K3	R1506	*J4	R2058	*K9
C6	C1	C501	*A6	C1411	K4	C3015	*G2	C4003	*J5	C4135	*G6	C5017	*F5	C5149	*D5	CNV1	L4	IC2006	*K9	R14	C11	R230	*L1	R454	*B9	R1031	K1	R1203	J3	R1335	J4	R1507	K5	R2059	*K9
C7	B1	C502	*A6	C1412	*K4	C3016	*G2	C4004	*J5	C4136	*G6	C5018	F6	C5150	*D5	CNW1	L6	IC2101	J9	R15	C11	R231	*L1	R455	*B9	R1032	*K1	R1204	*J3	R1336	*J3	R1508	*K5	R2060	*K9
C8	B11	C601	*A8	C1501	J4	C3017	*G2	C4005	J6	C4137	*G5	C5019	F5	C5151	*D5	CNY1	L10	IC2102	*J9	R16	C4	R232	*L1	R456	*A9	R1033	J2	R1205	K3	R1337	J3	R1509	J4	R2101	J10
C9	C4	C602	*B8	C1502	*J4	C3018	*G2	C4006	J6	C4138	*G5	C5020	F5	C5152	*D5	CNZ1	L12	IC2103	K10	R17	C4	R233	*L1	R457	*A9	R1034	*J1	R1206	*K3	R1338	J3	R1510	*J4	R2102	*J10
C10	B7	C603	*B8	C1503	K5	C3019	*G2	C4007	J5	C4139	G6	C5021	F5	C5153	D6			IC2104	*K10	R18	B7	R234	*L1	R458	*A9	R1035	K2	R1207	K3	R1339	J3	R1511	K4	R2103	K10
C11	C1	C604	*B8	C1504	*K5	C3020	*G2	C4008	J5	C4140	G6	C5022	F5	C5154	D6	D1	L1	IC2105	J10	R19	B7	R235	*L1	R459	*B9	R1036	*K2	R1208	*K3	R1340	J3	R1512	*K5	R2104	*K10
C12	B2	C605	*B8	C1505	J4	C3021	F2	C4009	*J5	C4141	*G6	C5023	*F5	C5155	D6	D2	*L1	IC2106	*J10	R20	C11	R236	*L1	R460	*B9	R1037	K1	R1209	J3	R1341	*J3	R1513	J4	R2105	J10
C13	C12	C606	*A8	C1506	*J4	C3022	F2	C4010	*J5	C4142	*G6	C5024	*F5	C5156	D6	D3	A3	IC2201	K10	R21	C11	R237	B10	R461	*B9	R1038	K1	R1210	*J3	R1342	*J3	R1514	*J4	R2106	*J10
C14	C3	C607	*A8	C1507	K4	C3023	F2	C4011	J6	C4143	*G5	C5025	*F5	C5157	*D6	D51	A4	IC2202	*K10	R22	C4	R238	B10	R462	*B9	R1039	K1	R1211	K3	R1343	*J3	R1515	K4	R2107	J10
C15	A7	C608	*A8	C1508	*K5	C3024	F2	C4012	J6	C4144	G6	C5026	*F5	C5158	*D6	D52	A4	IC2203	J10	R23	C4	R239	B10	R463	A7	R1040	K1	R1212	*K3	R1344	*J3	R1516	*K5	R2108	*J10
C16	B3	C609	*B8	C2001	K9	C3025	F3	C4013	J5	C4145	*G6	C5027	F6	C5159	*D6	D53	A5	IC2204	*J10	R24	B7	R240	B10	R464	A8	R1041	*K1	R1213	K2	R1345	K3	R1517	J4	R2109	K10
C17	*C12	C610	*B8	C2002	*K9	C3026	F3	C4014	*J5	C4146	*G5	C5028	F6	C5160	*D6	D54	A3	IC2205	K10	R25	B7	R241	B10	R465	B8	R1042	*K1	R1214	*K3	R1346	K3	R1518	*J4	R2110	*K10
C18	*C3	C611	*B8	C2003	J9	C3101	*G11	C4015	J6	C4147	G6	C5029	F6	C5201	D7	D201	A10	IC2206	*K10	R26	A4	R242	B10	R466	B8	R1043	*K1	R1215	J3	R1347	K3	R1519	K5	R2111	J10
C19	*A7	C612	*B8	C2004	*J9	C3102	*G11	C4016	J5	C4148	*G6	C5030	F6	C5202	D8			IC2301	J11	R27	A4	R243	A10	R467	B8	R1044	*K1	R1216	*J3	R1348	K3	R1520	*K4	R2112	*J10
C20	C7	C613	*A8	C2005	K9	C3103	*G11	C4017	*J5	C4149	*G5	C5031	*E6	C5203	*D8	DD1	C2	IC2302	*J11	R28	A4	R244	A10	R468	B8	R1045	J1	R1217	K3	R1349	*K3	R1521	J4	R2113	J9
C21	C7	C614	*B8	C2006	*K9	C3104	*G11	C4018	J6	C4150	*G5	C5032	*F6	C5204	*D7			IC2303	K11	R29	A5	R245	A10	R469	B8	R1046	J1	R1218	*K3	R1350	*K3	R1522	*J4	R2114	*J9
C22	C7	C615	*A8	C2007	K9	C3105	*G11	C4019	J5	C4151	*G5	C5033	E7	C5205	D8	E1	F6	IC2304	*K11	R30	B8	R246	B10	R470	B7	R1047	J2	R1219	K2	R1351	*K3	R1523	K5	R2115	K10
C51	B4	C616	*B8	C2008	*K9	C3106	*G11	C4020	J5	C4152	*G5	C5034	F8	C5206	D8	E2	*F6	IC2305	J11	R51	*B3	R247	B10	R471	A8	R1048	J2	R1220	*K3	R1352	*K3	R1524	*K4	R2116	*K10
C52	B4	C617	*A8	C2009	J9	C3107	*G11	C4021	J5	C4153	G6	C5035	*E8	C5207	D7	E3	J12	IC2306	*J11	R52	*B3	R248	B10	R472	A8	R1049	*J2	R1221	J3	R1353	J3	R1525	J4	R2117	J10
C101	A9	C618	*A8	C2010	*J9	C3108	H11	C4022	J5	C4154	G6	C5036	*F7	C5208	D8	E4	B9	IC2401	K11	R53	*A3	R249	B10	R473	A7	R1050	*J2	R1222	*J3	R1354	J3	R1526	J4	R2118	*J10
C102	A9	C619	*A8	C2011	K9	C3109	H11	C4023	*J5	C4155	G6	C5037	*F6	C5209	*D8	E5	A5	IC2402	*K11	R54	A4	R250	A10	R474	A7	R1051	*J1	R1223	K3	R1355	J4	R1527	J4	R2119	J9
C103	A9	C620	*A8	C2012	*K9	C3110	H11	C4024	*J5	C4156	G6	C5038	*E6	C5210	*D7	E6	K2	IC2403	J11	R55	A4	R301	*B13	R475	B7	R1052	*J1	R1224	*K3	R1356	J4	R1528	J4	R2120	*J9
C104	*K13	C621	*B8	C2101	J10	C3111	H11	C4025	*J5	C4157	*G6	C5039	F7	C5211	D8			IC2404	*J11	R56	A4	R302	*B13	R476	B7	R1053	K2	R1225	K3	R1357	*J4	R1529	*J4	R2121	K10
C105	K12	C622	*A8	C2102	*J10	C3112	H11	C4026	*J5	C4158	*G6	C5040	E8	C5212	D8	F1	L1	IC2405	K12	R57	B4	R303	*B12	R477	B7	R1054	K2	R1226	*K2	R1358	*J4	R1530	*J4	R2122	*K10
C106	A9	C623	*B8	C2103	K10	C3113	H11	C4027	J6	C4159	*G6	C5041	*F8	C5213	D7			IC2406	*K12	R58	*A4	R304	*B12	R478	B7	R1055	K2	R1227	J3	R1359	*J3	R1531	*J4	R2123	J10
C107	A9	C624	*B8	C2104	*K10	C3114	G10	C4028	J6	C4160	*G6	C5042	*E7	C5214	*D7	FB1	B11	IC2501	J12	R59	A4	R305	*B12	R479	B7	R1056	K2	R1228	*J3	R1360	*J3	R1532	*J4	R2124	*J10
C108	K13	C625	*B8	C2105	J10	C3115	G10	C4029	J6	C4201	G7	C5043	*F6	C5215	D8	FB2	C4	IC2502	*J12	R60	A4	R306	*A12	R480	B7	R1057	*K2	R1229	K3	R1401	K4	R1533	K4	R2125	J9
C109	*K13	C626	*B8	C2106	*J10	C3116	G10	C4030	J6	C4202	G8	C5044	F7	C5216	D7	FB3	B7	IC2503	K12	R61	A4	R307	L12	R481	B8	R1058	*K2	R1230	*K3	R1402	*K4	R1534	K4	R2126	*J9
C110	K13	C627	*B8	C2107	J9	C3117	G10	C4031	*J6	C4203	*G8	C5045	*F7	C5217	*D8	FB4	C7	IC2504	*K12	R62	A4	R308	L12	R482	B8	R1059	*K2	R1231	K3	R1403	J4	R1535	K5	R2127	K10
C111	*K12	C628	*B8	C2108	*J10	C3118	G10	C4032	*J6	C4204	*G7	C5046	*F6	C5218	D8			IC3001	G2	R63	A4	R309	*D12	R483	*A8	R1060	*K2	R1232	*K2	R1404	*J4	R1536	K5	R2128	*K10
C201	*B10	C629	*B8	C2109	K9	C3119	G10	C4033	J7	C4205	G8	C5047	F7	C5219	D7	IC1	B10	IC3101	G11	R64	B4	R310	D12	R484	*A8	R1101	J2	R1233	J3	R1405	K4	R1537	*K5	R2129	J10
C202	*B10	C630	*B8	C2110	*K10	C3120	G10	C4034	J8	C4206	G8	C5048	*F8	C5220	D7	IC2	B8	IC3201	E2	R65	*A4	R311	*D12	R485	*A8	R1102	*J2	R1234	*J3	R1406	*K4	R1538	*K5	R2130	*J10
C203	A10	C631	*A8	C2111	J10	C3121	F11	C4035	*J8	C4207	G7	C5049	*F6	C5221	D7	IC11	C11	IC3301	E11	R66	A4	R312	D12	R486	*B8	R1103	K2	R1235	K3	R1407	K4	R1539	*K4	R2131	J9
C204	B10	C632	*B8	C2112	*J10	C3122	F11	C4036	*J7	C4208	G8	C5050	*F6	C5222	D8	IC12	C4	IC4001	J5	R67	A4	R313	*D12	R487	*B8	R1104	*K2	R1236	*K3	R1408	*K4	R1540	*K4	R2132	*J9
C205	B10	C1001	K1	C2201	K10	C3123	F11	C4037	*J6	C4209	*G8	C5051	*F6	C5223	*D8	IC13	B7	IC4002	*J5	R68	A3	R314	D12	R488	*B8	R1105	J2	R1237	K2	R1409	J4	R2001	K9	R2133	K10
C206	B10	C1002	*K1	C2202	*K10	C3124	F11	C4038	*J6	C4210	*G7	C5052	*F6	C5224	*D7	IC51	A4	IC4003	J6	R69	A3	R315	*C12	R489	*B8	R1106	*J2	R1238	K2	R1410	*J4	R2002	*K9	R2134	*K10
C207	B10	C1003	J2	C2203	J10	C3125	F11	C4039	J7	C4211	G8	C5053	F7	C5225	*D7	IC52	A3	IC4004	*J6	R70	B3	R316	C12	R490	*B8	R1107	J2	R1239	K3	R1411	K4	R2003	J9	R2135	J10
C208	B10	C1004	*J2	C2204	*J10	C3126	F11	C4040	J8	C4212	G8	C5054	F7	C5226	*D7	IC101	A9	IC4005	J7	R71	*A5	R317	*C12	R491	*B8	R1108	*J2	R1240	K3	R1412	*K4	R2004	*J9	R2136	*J10
C209	A9	C1005	K2	C2205	K11	C3201	D3	C4041	*J8	C4213	G7	C5055	F7	C5227	D8	IC102	A9	IC4006	*J7	R72	A5	R318	C12	R492	*A7	R1109	K2	R1241	*K3	R1413	K4	R2005	K9	R2137	J9
C210	B10	C1006	*K2	C2206	*K11	C3202	D3	C4042	*J7	C4214	*G7	C5056	F8	C5228	D8	IC103	*K12	IC4101	J8	R73	A5	R401	B9	R493	*A7	R1110	*K2	R1242	*K3	R1414	*K4	R2006	*K9	R2138	J9
C211	*A10	C1007	K1	C2207	K10	C3203	E3	C4043	*J6	C4215	G8	C5057	*F8	C5229	D8	IC104	K13	IC4102	*J8	R74	A4	R402	B8	R494	*A7	R1111	J2	R1243	*K2	R1415	J4	R2007	K9	R2139	J9
C212	*A10	C1008	*K1	C2208	*K10	C3204	E3	C4044	J7	C4216	G7	C5058	*F7	C5230	D8	IC105	K13	IC4103	G5	R75	A4	R403	B8	R495	*B7	R1112	*J2	R1244	*K2	R1416	*J4	R2008	*K9	R2140	J9
C213	*B10	C1009	J1	C2209	J10	C3205	E3	C4045	*J7	C4217	*G8	C5059	*F7	C5231	*D8	IC106	K12	IC4104	*G5	R76	B4	R404	B8	R496	*B7	R1113	J2	R1245	J3	R1417	K4	R2009	J9	R2141	*J9
C214	*B10	C1010	*J2	C2210	*J10	C3206	E3	C4046	*J6	C4218	G8	C5060	*F7	C5232	*D8	IC107	*K12	IC4105	G6	R77	*A3	R405	B8	R497	*B7	R1114	*J2	R1246	J3	R1418	*K4	R2010	*J9	R2142	*J9
C215	*B10	C1011	K2	C2211	K10	C3207	E3	C4047	J7	C4219	G7	C5101	E8	C5233	E6	IC201	A10	IC4106	*G6	R78	A3	R406	B8	R501	*A6	R1115	K2	R1247	J3	R1419	K4	R2011	K9	R2143	*J9
C216	*B10	C1012	*K2	C2212	*K11	C3208	E3	C4048	*J8	C4220	G7	C5102	F8	C5234	F7	IC301	C12	IC4201	G7	R79	A3	R407	B8	R502	*A6	R1116	*K2	R1248	J3	R1420	*K4	R2012	*K9	R2144	*J9
C217	*B10	C1101	J2	C2301	J11	C3209	E3	C4049	*J6	C4221	G7	C5103	*E8	C5235	*D8	IC302	B12	IC4202	*G7	R101	A9	R408	B8	R503	*A6	R1117	J2	R1249	*J3	R1421	J4	R2013	K9	R2145	K10
C218	*B10	C1102	*J2	C2302	*J11	C3210	E2	C4050	*J6	C4222	G8	C5104	*F8	C5236	*D8	IC303	C12	IC4203	G8	R102	*K12	R409	B8	R504	*A6	R1118	*J2	R1250	*J3	R1422	*J4	R2014	*K9	R2146	K10
C219	*A10	C1103	K2	C2303	K11	C3211	E2	C4051	*J6	C4223	*G8	C5105	D5	C5237	F6	IC304	L12	IC4204	*G8	R103	*L12	R410	B8	R505	*A6	R1119	J2	R1251	*J3	R1423	K4	R2015	J9	R2147	K10
C220	*A10	C1104	*K2	C2304	*K11	C3212	E2	C4052	*J6	C4224	*G7	C5106	D5	C5238	E7	IC305	K7	IC4205	G7	R104	*L13	R411	B8	R506	*A6	R1120	*J2	R1252	*J3	R1424	*K4	R2016	*J9	R2148	K10
C221	A10	C1105	J2	C2305	J11	C3213	E2	C4053	J7	C4225	*G7	C5107	F8	C5239	*D8	IC306	L12	IC5001	E5	R105	*K13	R412	B8	R507	*A6	R1121	K2	R1253	K3	R1425	K4	R2017	K9	R2149	*K10
C222	*A10	C1106	*J2	C2306	*J11	C3214	E2	C4054	J7	C4226	*G7	C5108	E8	C5240	F7	IC401	*B8	IC5002	*E5	R106	K13	R413	B8	R508	*B6	R1122	*K2	R1254	K3	R1426	*K4	R2018	*K9	R2150	*K10
C223	*A10	C1107	J2	C2307	J10	C3215	E2	C4055	J7	C4227	G8	C5109	*F8	C5241	*D8	IC501	*A6	IC5003	E6	R107	L13	R414	B8	R509	*B6	R1123	J2	R1255	K3	R1427	J4	R2019	K9	R2151	*K10
C224	*B10	C1108	*J2	C2308	*J11	C3216	E2	C4056	J8	C4228	G8	C5110	*E8	C5242	F6	IC1001	K1	IC5004	*E6	R108	K12	R415	B8	R510	A6	R1124	*J2	R1256	K3	R1428	*J4	R2020	*K9	R2152	*K10
C225	*B10	C1109	K2	C2309	K11	C3217	E2	C4057	*J8	C4229	G8	C5111	D5	C5243	*D8	IC1002	*K1	IC5005	E7	R109	K12	R416	B8	R511	*B6	R1125	J2	R1257	*K3	R1429	K4	R2021	J9	R2153	J10
C226	*B10	C1110	*K2	C2310	*K11	C3218	E2	C4058	*J7	C4230	G8	C5112	D5	C5244	*D8	IC1003	J1	IC5006	*E7	R110	*K12	R417	B8	R512	*A6	R1126	*J2	R1258	*K3	R1430	*K4	R2022	*J9	R2154	J10
C227	*B10	C1111	J2	C2311	J11	C3219	D2	C4059	*J7	C4231	*G8	C5113	F8	C5245	*D8	IC1004	*J1	IC5101	E8	R111	*K12	R418	B8	R513	*B6	R1127	K2	R1259	*K3	R1431	K4	R2023	K9	R2155	J10
C228	*B10	C1112	*J2	C2312	*J11	C3220	D2	C4060	*J7	C4232	*G8	C5114	*F8	C5246	*D8	IC1005	K2	IC5102	*E8	R112	*K12	R419	B8	R514	*A6	R1128	*K2	R1260	*K3	R1432	*K4	R2024	*K9	R2156	J10
C229	*B10	C1201	K3	C2401	K11	C3221	D2	C4101	J8	C4233	G6	C5115	D5	C5247	F6	IC1006	*K2	IC5103	D5	R113	*K12	R420	B8	R515	*B6	R1129	J2	R1301	J3	R1433	J4	R2025	K9	R2157	*J10
C230	*B10	C1202	*K3	C2402	*K11	C3222	D2	C4102	J8	C4234	G7	C5116	F8	C5248	F7	IC1101	J2	IC5104	*D5	R114	A9	R421	*B8	R516	*B8	R1130	*J2	R1302	*J3	R1434	*J4	R2026	*K9	R2158	*J10
C231	B10	C1203	J3	C2403	J12	C3223	D2	C4103	*J8	C4235	*G8	C5117	*F8	C5249	F7	IC1102	*J2	IC5105	D6	R115	K13	R422	*B8	R517	*B8	R1131	J2	R1303	K3	R1435	K4	R2027	J9	R2159	*J10
C232	B10	C1204	*J3	C2404	*J12	C3224	D2	C4104	*J8	C4236	*G8	C5118	D5	C5250	F7	IC1103	K2	IC5106	*D6	R116	K13	R423	*B8	R518	*B8	R1132	*J2	R1304	*K3	R1436	*K4	R2028	*J9	R2160	*J10
C233	B10	C1205	K3	C2405	K12	C3225	D3	C4105	G5	C4237	G6	C5119	F8			IC1104	*K2	IC5201	D7	R117	*K13	R424	B8	R1001	K1	R1133	K2	R1305	J4	R1437	K4	R2029	K9	R2201	K10
C301	C12	C1206	*K3	C2406	*K12	C3226	D3	C4106	G5	C4238	G7	C5120	F8	CL1	B8	IC1105	J2	IC5202	*D7	R201	*B10	R425	B8	R1002	*K1	R1134	*K2	R1306	*J4	R1438	K4	R2030	*K9	R2202	*K10
C302	B12	C1207	K2	C2407	K11	C3301	D12	C4107	J8	C4239	*G8	C5121	F8	CL101	K13	IC1106	*J2	IC5203	D8	R202	B10	R426	B8	R1003	J2	R1135	J2	R1307	J3	R1439	K4	R2031	K9	R2203	J10
C303	B13	C1208	*K3	C2408	*K11	C3302	D12	C4108	J8	C4240	G7	C5122	F8	CL102	K12	IC1201	K2	IC5204	*D8	R203	B10	R427	B8	R1004	*J2	R1136	*J2	R1308	*J3	R1440	K4	R2032	*K9	R2204	*J10
C304	C13	C1209	J3	C2409	J11	C3303	E12	C4109	*J8	C4241	*G8	C5123	*F8	CL103	K12	IC1202	*K2	IC5205	E7	R204	*B10	R428	*B8	R1005	K2	R1137	J2	R1309	K3	R1441	*K4	R2033	J9	R2205	K11
C305	B12	C1210	*J3	C2410	*J12	C3304	E12	C4110	*J8	C4242	G6	C5124	*F8	CL104	K12	IC1203	J3			R205	*A10	R429	*B8	R1006	*K2	R1138	J2	R1310	*K3	R1442	*K4	R2034	*J9	R2206	*K11
C306	B12	C1211	K3	C2411	K11	C3305	E12	C4111	G5	C4243	*G8	C5125	*F8	CL105	K12	IC1204	*J3	Q1	C1	R206	B10	R430	A9	R1007	K1	R1139	J2	R1311	J4	R1443	*K4	R2035	K9	R2207	K10
C307	B13	C1212	*K3	C2412	*K12	C3306	E12	C4112	G5	C4244	*G8	C5126	*F8	CL106	K12	IC1205	K3	Q2	C1	R207	B10	R431	A9	R1008	*K1	R1140	J2	R1312	*J4	R1444	*K4	R2036	*K9	R2208	*K10
C308	B13	C1301	J3	C2501	J12	C3307	E12	C4113	J8	C4245	*G8	C5127	D5	CL201	A11	IC1206	*K3	Q51	*A4	R208	B10	R432	A9	R1009	J2	R1141	*J2	R1313	J3	R1445	J4	R2037	K9	R2209	J10
C309	C12	C1302	*J3	C2502	*J12	C3308	E11	C4114	*J8	C4246	*G8	C5128	D5	CL202	A10	IC1301	J3	Q52	*A4	R209	A10	R433	B9	R1010	*J2	R1142	*J2	R1314	*J3	R1446	J4	R2038	K9	R2210	*J10
C310	B12	C1303	K3	C2503	K12	C3309	E11	C4115	G5	C4247	G6	C5129	D5	CL203	A10	IC1302	*J3	Q53	*A4	R210	B10	R434	B9	R1011	K2	R1143	*J2	R1315	K3	R1447	J4	R2039	K9	R2211	K11
C311	B13	C1304	*K3	C2504	*K12	C3310	E11	C4116	J8	C4248	G7	C5130	D5	CL204	A11	IC1303	K3	Q54	*A4	R211	B10	R435	B9	R1012	*K2	R1144	*J2	R1316	*K3	R1448	J4	R2040	K9	R2212	*K11
C312	C13	C1305	J4	C2505	J12	C3311	E11	C4117	*J8	C4249	G7	C5131	*D5	CL205	A11	IC1304	*K3	Q55	*A5	R212	*B10	R436	A9	R1013	K1	R1145	K2	R1317	J3	R1449	*J4	R2041	*K9	R2213	K10
C313	B12	C1306	*J4	C2506	*J12	C3312	E11	C4118	G5	C4250	G7	C5132	*D5	CL206	A10	IC1305	J3	Q56	*A5	R213	A10	R437	A9	R1014	*K1	R1146	K2	R1318	*J4	R1450	*J4	R2042	*K9	R2214	*K10
C314	B12	C1307	J3	C2507	K12	C3313	E11	C4119	J8	C5001	E5	C5133	D6	CL207	A10	IC1306	*J3	Q57	*A3	R214	B10	R438	A9	R1015	J1	R1147	K2	R1319	J3	R1451	*J4	R2043	*K9	R2215	J10
C315	B13	C1308	*J3	C2508	*K12	C3314	E10	C4120	J8	C5002	F5	C5134	D6	CL208	A10	IC1401	K4	Q58	*A3	R215	B10	R439	A9	R1016	*J2	R1148	K2	R1320	*J3	R1452	*J4	R2044	*K9	R2216	*J10
C316	B13	C1309	K3	C3001	G3	C3315	E10	C4121	J8	C5003	*E5	C5135	*D6	CL401	B8	IC1402	*K4			R216	B10	R440	A9	R1017	K2	R1149	*K2	R1321	K3	R1453	K4	R2045	J9	R2217	K10
C317	C12	C1310	*K3	C3002	G3	C3316	E10	C4122	J8	C5004	*F5	C5136	*D6	CL402	B8	IC1403	J4	R1	A3	R217	B10	R441	B9	R1018	*K2	R1150	*K2	R1322	*K3	R1454	K4	R2046	J9	R2218	*K10
C318	C12	C1311	J3	C3003	G3	C3317	E10	C4123	*J8	C5005	E6	C5137	*D5	CL403	B8	IC1404	*J4	R2	A3	R218	B10	R442	B9	R1019	K1	R1151	*K2	R1323	J3	R1455	K4	R2047	J9	R2219	K10
C319	C13	C1312	*J4	C3004	G3	C3318	E10	C4124	*J8	C5006	F6	C5138	*D5	CL404	B8	IC1405	K4	R3	A3	R219	B10	R443	B9	R1020	*K1	R1152	*K2	R1324	*J4	R1456	K4	R2048	J9	R2220	*K10
C320	C13	C1401	K4	C3005	G3	C3319	D10	C4125	*J8	C5007	F5	C5139	D6	CL405	B8	IC1406	*K4	R4	C1	R220	B10	R444	B9	R1021	J1	R1153	J2	R1325	J3	R1457	*K4	R2049	*J9	R2221	J10
C321	C12	C1402	*K4	C3006	G3	C3320	D10	C4126	*J8	C5008	E5	C5140	D6	CL406	B8	IC1501	J4	R5	C1	R221	*B10	R445	B9	R1022	*J2	R1154	J2	R1326	*J3	R1458	*K4	R2050	*J9	R2222	*J10
C322	C12	C1403	J4	C3007	G3	C3321	D11	C4127	G5	C5009	*F5	C5141	*D6	CL601	A8	IC1502	*J4	R6	C1	R222	B10	R446	B9	R1023	K2	R1155	J2	R1327	K3	R1459	*K4	R2051	*J9	R2223	K10
C323	C13	C1404	*J4	C3008	H3	C3322	D11	C4128	G5	C5010	*E5	C5142	*D6	CL602	A8	IC1503	K4	R7	B2	R223	A11	R447	*A9	R1024	*K2	R1156	J2	R1328	*K3	R1460	*K4	R2052	*J9	R2224	*K10
C324	C13	C1405	K4	C3009	H3	C3323	D11	C4129	G5	C5011	F6	C5143	*D5	CL603	A8	IC1504	*K4	R8	B11	R224	A11	R448	*A9	R1025	K1	R1157	*J2	R1329	J4	R1501	J4	R2053	K9	R2225	K10

R2226	*K10	R2358	*J11	R2530	*J12	R4078	J7	R4174	*G5	R4270	G7	R5082	*F7	R5178	D6	R5274	*D8
R2227	J10	R2359	*J11	R2531	*J12	R4079	J7	R4175	*G5	R4271	G7	R5083	*F7	R5179	D6	R5275	F7
R2228	*J10	R2360	*J11	R2532	*J12	R4080	J7	R4176	*G5	R4272	G7	R5084	*F7	R5180	D6	R5276	F7
R2229	K10	R2401	K11	R2533	K12	R4081	*J7	R4177	G6	R4273	*H8	R5085	*F6	R5181	*D6	R5277	*D8
R2230	*K10	R2402	*K11	R2534	K12	R4082	*J7	R4178	G6	R4274	*H8	R5086	*F6	R5182	*D6	R5278	*D8
R2231	K10	R2403	J12	R2535	K12	R4083	*J7	R4179	G6	R4275	H7	R5087	F7	R5183	*D6	R5279	F6
R2232	*K10	R2404	*J12	R2536	K12	R4084	*J7	R4180	G6	R4276	H7	R5088	F7	R5184	*D6	R5280	F7
R2233	J10	R2405	K12	R2537	*K12	R4085	*J6	R4181	*G6	R4277	*H8	R5089	*F7	R5185	*D5		
R2234	*J10	R2406	*K12	R2538	*K12	R4086	*J6	R4182	*G6	R4278	*H8	R5090	*F7	R5186	*D5	RB101	*K12
R2235	K10	R2407	K11	R2539	*K12	R4087	J7	R4183	*G6	R4279	H6	R5091	*F6	R5187	D6	RB102	*K12
R2236	*K10	R2408	*K11	R2540	*K12	R4088	J7	R4184	*G6	R4280	H7	R5092	*F6	R5188	D6	RB103	K12
R2237	K10	R2409	J12	R3001	G2	R4089	*J7	R4185	*H5	R5001	E5	R5093	F7	R5189	*D6	RB301	*C12
R2238	K10	R2410	*J12	R3101	G10	R4090	*J7	R4186	*H5	R5002	F5	R5094	F7	R5190	*D6	RB302	*B12
R2239	K10	R2411	K12	R3201	D2	R4091	*J6	R4187	H6	R5003	*E5	R5095	*F7	R5191	*D5	RB303	*C12
R2240	K10	R2412	*K12	R3301	D10	R4092	*J6	R4188	H6	R5004	*F5	R5096	*F7	R5192	*D5	RB304	*B12
R2241	*K10	R2413	K11	R4001	J5	R4093	J7	R4189	*H6	R5005	E6	R5101	E8	R5193	D6	RB305	*B12
R2242	*K10	R2414	*K11	R4002	J5	R4094	J7	R4190	*H6	R5006	F6	R5102	F8	R5194	D6	RB306	*B12
R2243	*K10	R2415	J11	R4003	*J5	R4095	*J7	R4191	*H5	R5007	E5	R5103	*E8	R5195	*D6	RB307	*B12
R2244	*K10	R2416	*J11	R4004	*J5	R4096	*J7	R4192	*H5	R5008	E5	R5104	*F8	R5196	*D6	RB308	*B12
R2245	J10	R2417	K12	R4005	J6	R4101	J8	R4193	H6	R5009	*E5	R5105	D5	R5201	D7	RB309	*C12
R2246	J10	R2418	*K12	R4006	J6	R4102	J8	R4194	H6	R5010	*E5	R5106	D5	R5202	D8	RB310	*B12
R2247	J10	R2419	K11	R4007	J5	R4103	*J8	R4195	*H6	R5011	E6	R5107	E8	R5203	*D8	RB311	*C12
R2248	J10	R2420	*K11	R4008	J5	R4104	*J8	R4196	*H6	R5012	E6	R5108	E8	R5204	*D7	RB312	*B12
R2249	*J10	R2421	J11	R4009	*J5	R4105	G5	R4201	G7	R5013	E5	R5109	*E8	R5205	D8	RB313	*B12
R2250	*J10	R2422	*J11	R4010	*J5	R4106	G5	R4202	G8	R5014	E5	R5110	*E8	R5206	D8	RB314	*B12
R2251	*J10	R2423	K12	R4011	J6	R4107	J8	R4203	*G8	R5015	*E5	R5111	D5	R5207	D7	RB315	*B12
R2252	*J10	R2424	*K12	R4012	J6	R4108	J8	R4204	*G7	R5016	*E5	R5112	D5	R5208	D8	RB316	*B12
R2253	K10	R2425	K11	R4013	J5	R4109	*J8	R4205	G8	R5017	E6	R5113	E8	R5209	*D8	RB317	*C12
R2254	K10	R2426	*K11	R4014	J5	R4110	*J8	R4206	G8	R5018	E6	R5114	E8	R5210	*D7	RB318	*C12
R2255	K10	R2427	J11	R4015	*J5	R4111	G5	R4207	G7	R5019	F5	R5115	*E8	R5211	D8	RB319	*B12
R2256	K10	R2428	*J11	R4016	*J5	R4112	G5	R4208	G8	R5020	E5	R5116	*E8	R5212	D8	RB320	*B12
R2257	*K10	R2429	K12	R4017	J6	R4113	J8	R4209	*G8	R5021	*F5	R5117	D5	R5213	D7	RB321	*B12
R2258	*K10	R2430	*K12	R4018	J6	R4114	J8	R4210	*G7	R5022	*E5	R5118	D5	R5214	D8	RB322	*B12
R2259	*K10	R2431	K11	R4019	J5	R4115	*J8	R4211	G8	R5023	F6	R5119	F8	R5215	*D8	RB323	*B12
R2260	*K10	R2432	*K11	R4020	J5	R4116	*J8	R4212	G8	R5024	E6	R5120	E8	R5216	*D7	RB324	*C12
R2301	J11	R2433	J11	R4021	*J5	R4117	G5	R4213	G7	R5025	F5	R5121	*F8	R5217	D8	RB325	*C12
R2302	*J11	R2434	*J11	R4022	*J5	R4118	G5	R4214	G8	R5026	F5	R5122	*E8	R5218	D8	RB326	*C12
R2303	K11	R2435	K12	R4023	J6	R4119	J8	R4215	*G8	R5027	F5	R5123	D5	R5219	D7	RB327	*C12
R2304	*K11	R2436	*K12	R4024	J6	R4120	J8	R4216	*G7	R5028	F5	R5124	D5	R5220	D8	RB328	*C12
R2305	J11	R2437	K11	R4025	J5	R4121	*J8	R4217	G8	R5029	*F5	R5125	F8	R5221	*D8	RB329	*C12
R2306	*J11	R2438	K11	R4026	J5	R4122	*J8	R4218	G8	R5030	*F5	R5126	F8	R5222	*D7	RB330	*C12
R2307	J11	R2439	K11	R4027	J5	R4123	G5	R4219	G7	R5031	*F5	R5127	F8	R5223	D8	RB331	*C12
R2308	*J11	R2440	K11	R4028	J5	R4124	G5	R4220	G8	R5032	*F5	R5128	F8	R5224	D8	RB332	*C12
R2309	K11	R2441	*K11	R4029	*J5	R4125	J8	R4221	*G8	R5033	F6	R5129	*F8	R5225	D7	RB333	*C12
R2310	*K11	R2442	*K11	R4030	*J5	R4126	J8	R4222	*G7	R5034	F6	R5130	*F8	R5226	D7	RB334	*C12
R2311	J11	R2443	*K11	R4031	*J5	R4127	J8	R4223	G8	R5035	F6	R5131	*F8	R5227	D7		
R2312	*J11	R2444	*K11	R4032	*J5	R4128	J8	R4224	G8	R5036	F6	R5132	*F8	R5228	D7	TP1	A3
R2313	J11	R2445	J11	R4033	J6	R4129	*J8	R4225	G7	R5037	F5	R5133	D5	R5229	*D7	TP2	A4
R2314	*J11	R2446	J11	R4034	J6	R4130	*J8	R4226	G7	R5038	F5	R5134	D5	R5230	*D7	TP3	A4
R2315	K11	R2447	J11	R4035	J6	R4131	*J8	R4227	G7	R5039	*F5	R5135	D5	R5231	*D7	TP4	A4
R2316	*K11	R2448	J11	R4036	J6	R4132	*J8	R4228	G7	R5040	*F5	R5136	D5	R5232	*D7	TP5	A5
R2317	J11	R2449	*J11	R4037	J5	R4133	G5	R4229	*G7	R5041	F6	R5137	F8	R5233	D8		
R2318	*J11	R2450	*J11	R4038	J5	R4134	G5	R4230	*G7	R5042	F6	R5138	F8	R5234	D8		
R2319	J11	R2451	*J11	R4039	*J5	R4135	G5	R4231	*G7	R5043	F5	R5139	*F8	R5235	D8		
R2320	*J11	R2452	*J11	R4040	*J5	R4136	G5	R4232	*G7	R5044	F5	R5140	*F8	R5236	D8		
R2321	K11	R2453	K12	R4041	J6	R4137	J8	R4233	G8	R5045	*F5	R5141	D5	R5237	D7		
R2322	*K11	R2454	K12	R4042	J6	R4138	J8	R4234	G8	R5046	*F5	R5142	D5	R5238	D7		
R2323	J11	R2455	K12	R4043	J5	R4139	*J8	R4235	G8	R5047	F6	R5143	F8	R5239	*D7		
R2324	*J11	R2456	K12	R4044	J5	R4140	*J8	R4236	G8	R5048	F6	R5144	F8	R5240	*D7		
R2325	J11	R2457	*K12	R4045	*J5	R4141	H5	R4237	H7	R5049	*E6	R5145	*F8	R5241	D8		
R2326	*J11	R2458	*K12	R4046	*J5	R4142	H5	R4238	H7	R5050	*F6	R5146	*F8	R5242	D8		
R2327	K11	R2459	*K12	R4047	J6	R4143	J8	R4239	*H7	R5051	E7	R5147	D5	R5243	D7		
R2328	*K11	R2460	*K12	R4048	J6	R4144	J8	R4240	*H7	R5052	F8	R5148	D5	R5244	D7		
R2329	J11	R2501	J12	R4049	*J6	R4145	*J8	R4241	H8	R5053	*E8	R5149	*D5	R5245	*D7		
R2330	*J11	R2502	*J12	R4050	*J6	R4146	*J8	R4242	H8	R5054	*F7	R5150	*D5	R5246	*D7		
R2331	J11	R2503	K12	R4051	J7	R4147	H5	R4243	H7	R5055	*E6	R5151	D6	R5247	D8		
R2332	*J11	R2504	*K12	R4052	J8	R4148	H5	R4244	H7	R5056	*E6	R5152	D6	R5248	D8		
R2333	K11	R2505	J12	R4053	*J8	R4149	*G5	R4245	*H7	R5057	E7	R5153	*D6	R5249	*D8		
R2334	*K11	R2506	*J12	R4054	*J7	R4150	*G5	R4246	*H7	R5058	E8	R5154	*D6	R5250	*D8		
R2335	J11	R2507	K12	R4055	*J6	R4151	G6	R4247	H8	R5059	*E8	R5155	*D5	R5251	E6		
R2336	*J11	R2508	*K12	R4056	*J6	R4152	G6	R4248	H8	R5060	*E7	R5156	*D5	R5252	F7		
R2337	J11	R2509	J12	R4057	J7	R4153	*G6	R4249	*G8	R5061	*E6	R5157	D6	R5253	*D8		
R2338	J11	R2510	*J12	R4058	J8	R4154	*G6	R4250	*G8	R5062	*E6	R5158	D6	R5254	*D8		
R2339	J11	R2511	K12	R4059	*J8	R4155	*G5	R4251	G6	R5063	E7	R5159	*D6	R5255	E6		
R2340	J11	R2512	*K12	R4060	*J7	R4156	*G5	R4252	G7	R5064	E8	R5160	*D6	R5256	E7		
R2341	*J11	R2513	J12	R4061	*J6	R4157	G6	R4253	*G8	R5065	*E8	R5161	*D5	R5257	*D8		
R2342	*J11	R2514	*J12	R4062	*J6	R4158	G6	R4254	*G8	R5066	*E7	R5162	*D5	R5258	*D8		
R2343	*J11	R2515	K12	R4063	J7	R4159	*G6	R4255	G6	R5067	*F6	R5163	D6	R5259	E6		
R2344	*J11	R2516	*K12	R4064	J8	R4160	*G6	R4256	G7	R5068	*E6	R5164	D6	R5260	E7		
R2345	K11	R2517	J12	R4065	*J8	R4161	*G5	R4257	*G8	R5069	F7	R5165	*D6	R5261	*D8		
R2346	K11	R2518	*J12	R4066	*J7	R4162	*G5	R4258	*G8	R5070	E8	R5166	*D6	R5262	*D8		
R2347	K11	R2519	K12	R4067	*J6	R4163	G6	R4259	G6	R5071	*F8	R5167	*D5	R5263	F6		
R2348	K11	R2520	*K12	R4068	*J6	R4164	G6	R4260	G7	R5072	*E7	R5168	*D5	R5264	E7		
R2349	*K11	R2521	J12	R4069	J7	R4165	*G6	R4261	*G8	R5073	*F6	R5169	D6	R5265	*D8		
R2350	*K11	R2522	*J12	R4070	J8	R4166	*G6	R4262	*G8	R5074	*F6	R5170	D6	R5266	*D8		
R2351	*K11	R2523	K12	R4071	*J8	R4167	*G5	R4263	G6	R5075	*F6	R5171	*D6	R5267	*D8		
R2352	*K11	R2524	*K12	R4072	*J7	R4168	*G5	R4264	G7	R5076	*F6	R5172	*D6	R5268	*D8		
R2353	J11	R2525	J12	R4073	*J6	R4169	G6	R4265	*G8	R5077	F7	R5173	*D5	R5269	F6		
R2354	J11	R2526	J12	R4074	*J6	R4170	G6	R4266	*G8	R5078	F7	R5174	*D5	R5270	F7		
R2355	J11	R2527	J12	R4075	*J6	R4171	*G6	R4267	*G8	R5079	F7	R5175	*D5	R5271	F7		
R2356	J11	R2528	J12	R4076	*J6	R4172	*G6	R4268	*G8	R5080	F7	R5176	*D5	R5272	F7		
R2357	*J11	R2529	*J12	R4077	J7	R4173	*G5	R4269	G6	R5081	*F7	R5177	D6	R5273	*D8		

Components locations list; previous page

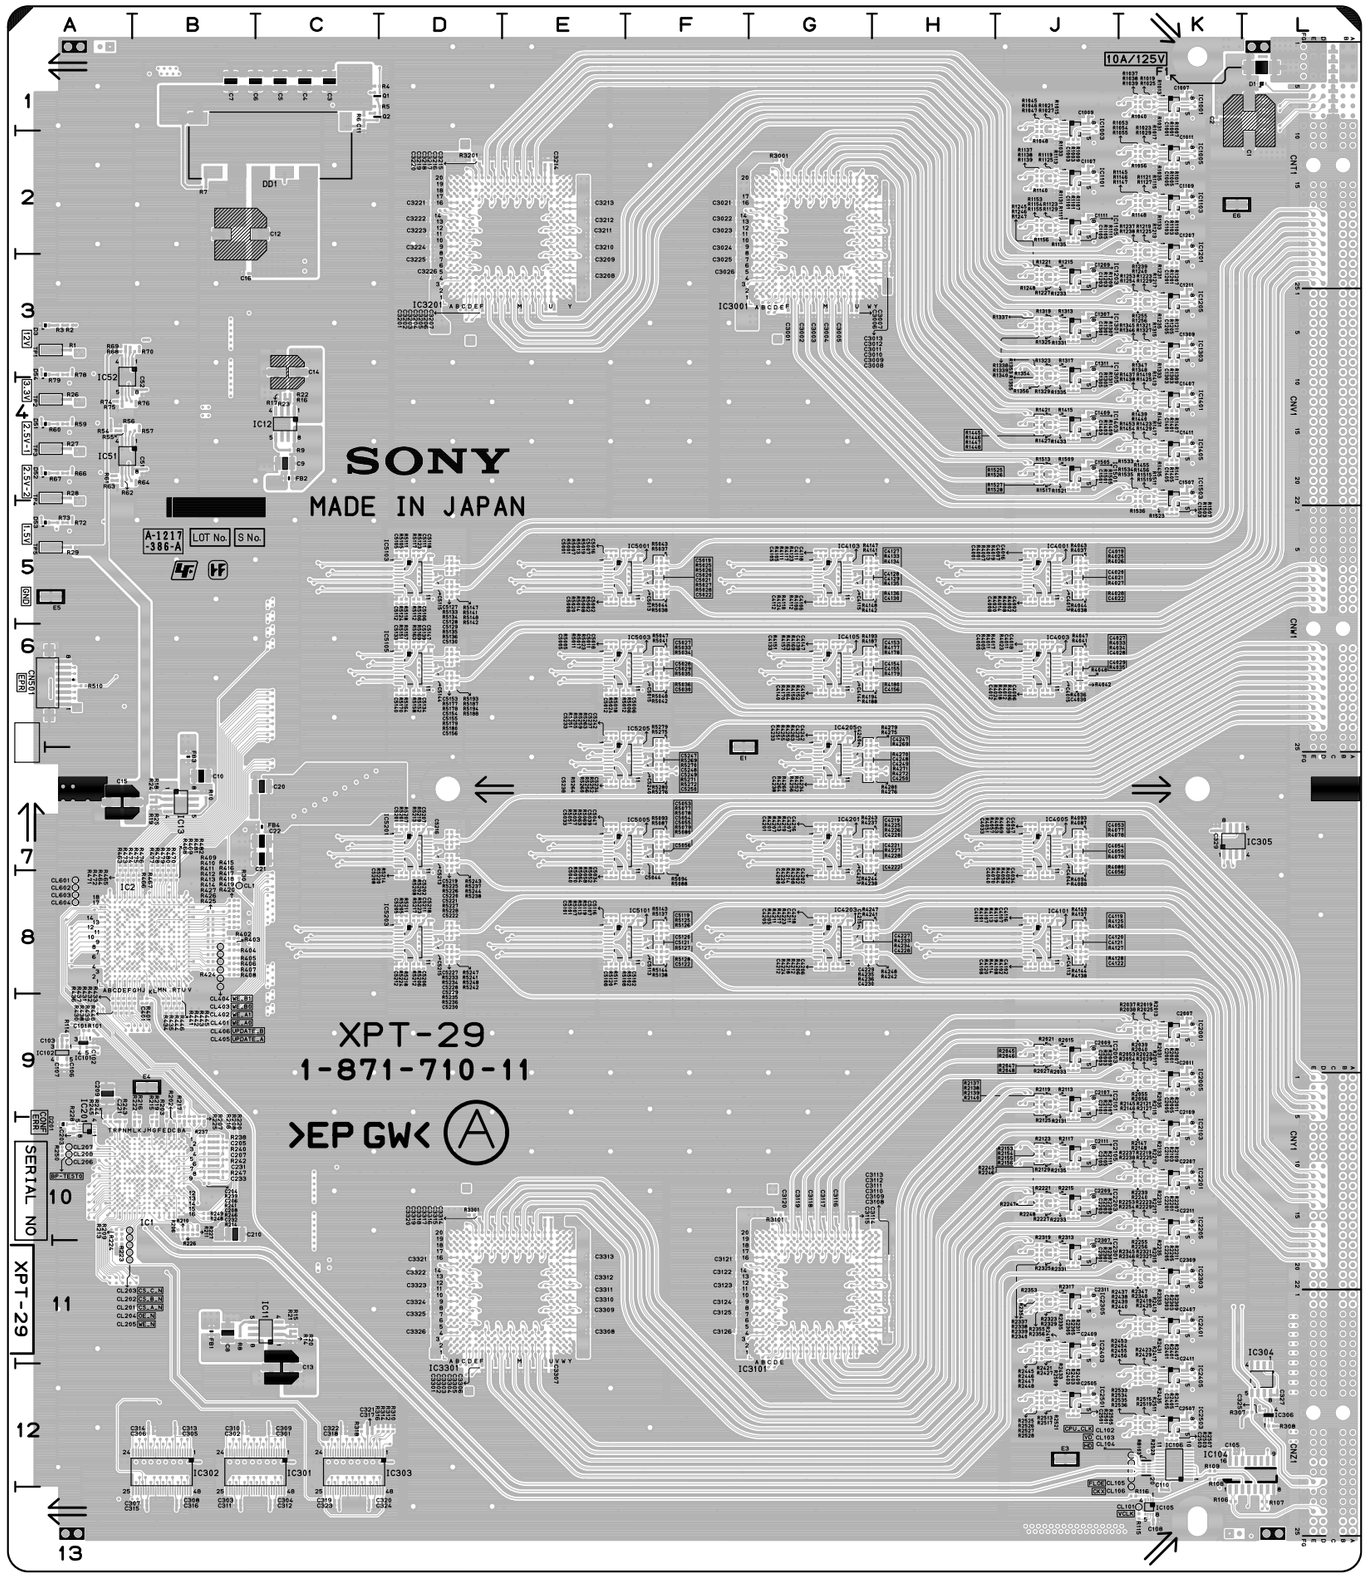

XPT-29 -A SIDE-
SUFFIX: -11

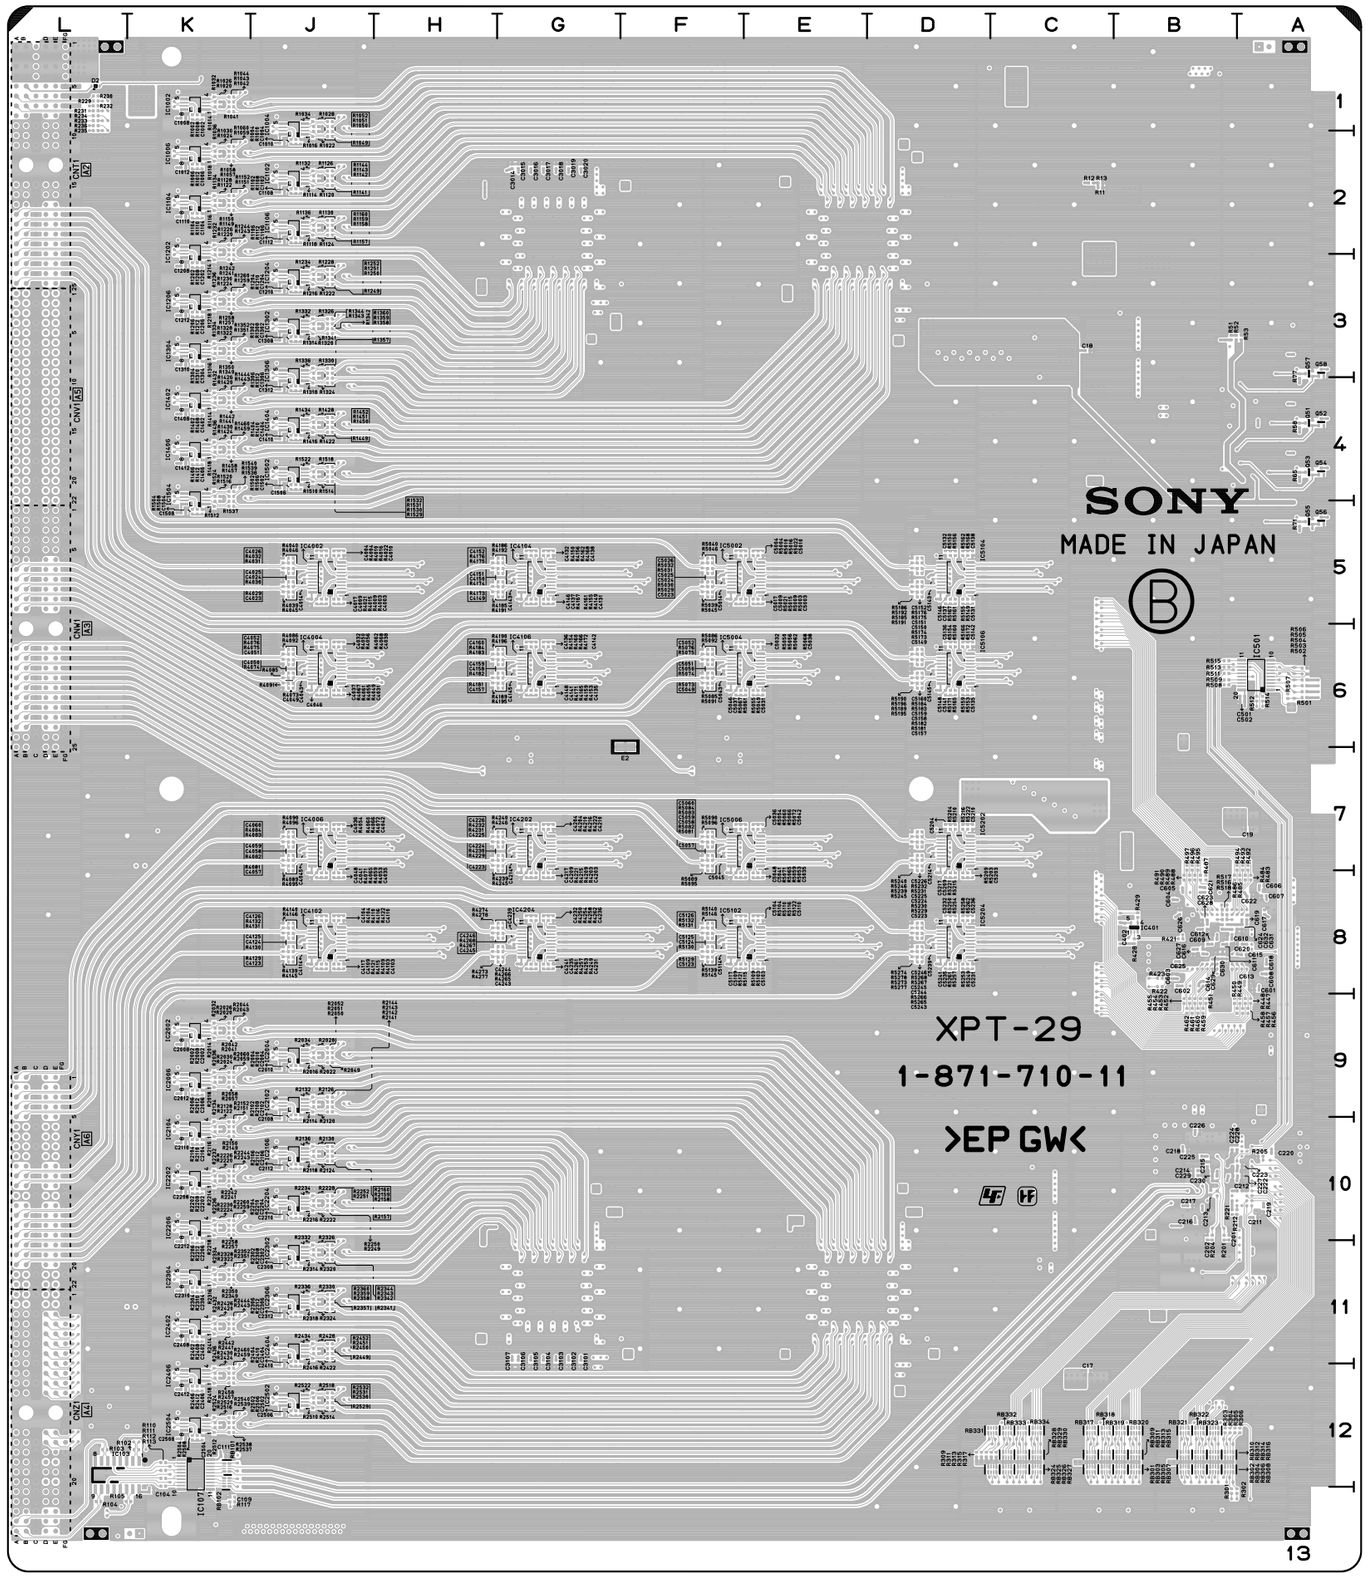

XPT-29 -B SIDE-
SUFFIX: -11

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer :

Check the metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 3.5 mA. Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 5.25 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 20 V AC range are suitable. (See Fig. A)

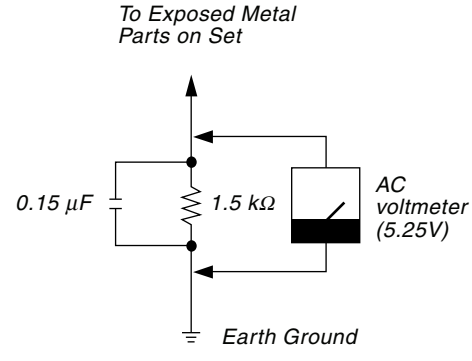


Fig A. Using an AC voltmeter to check AC leakage.

MVS-6000-C (SY) J, E
9-968-634-01

Sony Corporation

Printed in Japan
2009. 5 16
©2009