

Appendix B ♦ Pinouts

Figure B-1. Analog Audio In/Out 37-Pin, Male, D-Sub Connector for Audio Options

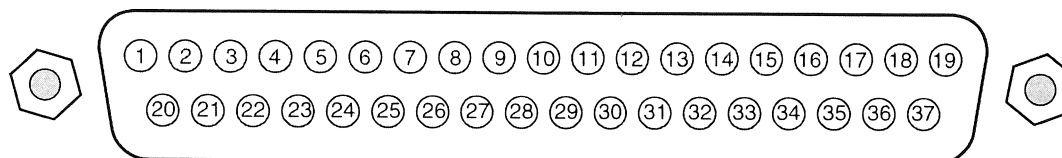


Table B-1. Pinouts for ANALOG AUDIO IN/OUT Connector and Audio Breakout Board

Pinout	Signal	Pinout	Signal
1	Analog input 1 –	20	Analog input 1 +
2	Analog input 2 –	21	Analog input 2 +
3	Analog input 3 –	22	Analog input 3 +
4	GND	23	Analog input 4 +
5	Analog input 4 –	24	Analog input 5 +
6	Analog input 5 –	25	Analog input 6 +
7	Analog input 6 –	26	GND
8	Analog input 7 –	27	Analog input 7 +
9	Analog input 8 –	28	Analog input 8 +
10	GND	29	Analog output 1 +
11	Analog output 1 –	30	Analog output 2 +
12	Analog output 2 –	31	Analog output 3 +
13	Analog output 3 –	32	Analog output 4 +
14	Analog output 4 –	33	Analog output 5 +
15	Analog output 5 –	34	Analog output 6 +
16	Analog output 6 –	35	Analog output 7 +
17	Analog output 7 –	36	Analog output 8 +
18	Analog output 8 –	37	GND
19	GND		