


## Cable for Connecting a PC using Hyperterminal to a 6600E Controller

### 9 pin to 25 pin "Null Modem" Cable

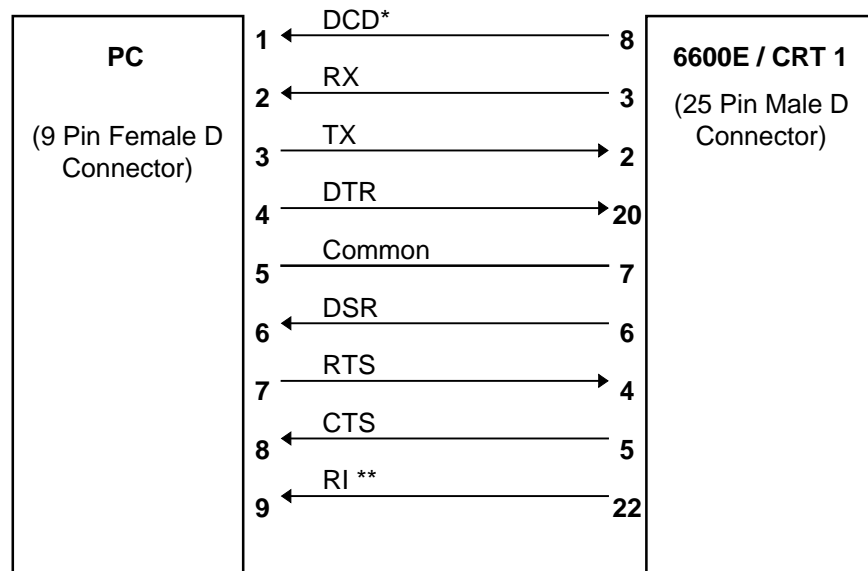

This same cable will work to connect a PC with a 9 pin serial port connector to a modem.

#### HyperTerminal to 6600E

##### Cable Connections

- Typically Com 1 on PC to CRT 1 on 6600E

##### HyperTerminal Settings

1. 9600 Baud
2. 8 data bits
3. No parity
4. 2 stop bits
5. Flow control Xon/Xoff
6. Function - arrow and control keys act as terminal keys
7. Emulation – VT100
8. Backscroll Buffer – Lines 500
9. ASCII Setup - Echo typed characters locally