

# XVS Back Bench Panel

## Setup for AMV


Prepared by Sony Professional Solutions

Glenn Hill


Revisions

- GSH - R0 new


- On the New menu, go to page 7311
- Change the Unit ID to be 2, and allow the menu to Reboot.

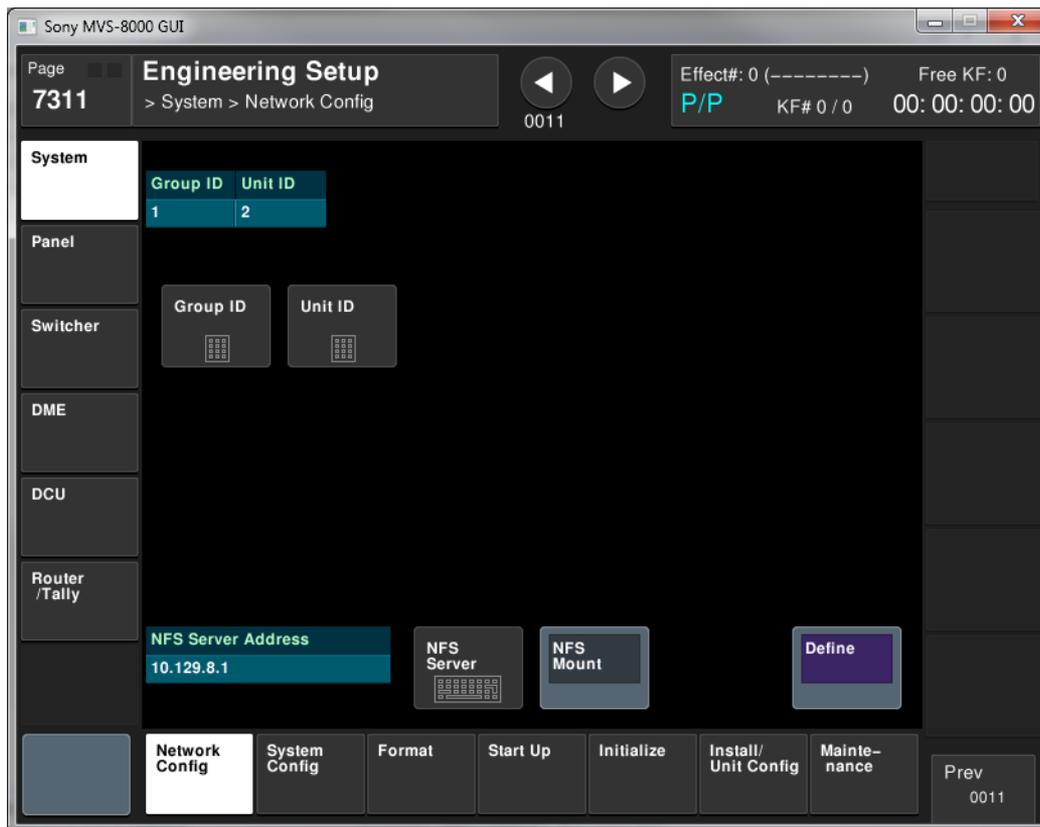


- Run web browser on PC and access 192.168.111.1
- Select the Maintenance Menu
- When Authentication Form is displayed
  - User Name: setup
  - Password: sjx30260

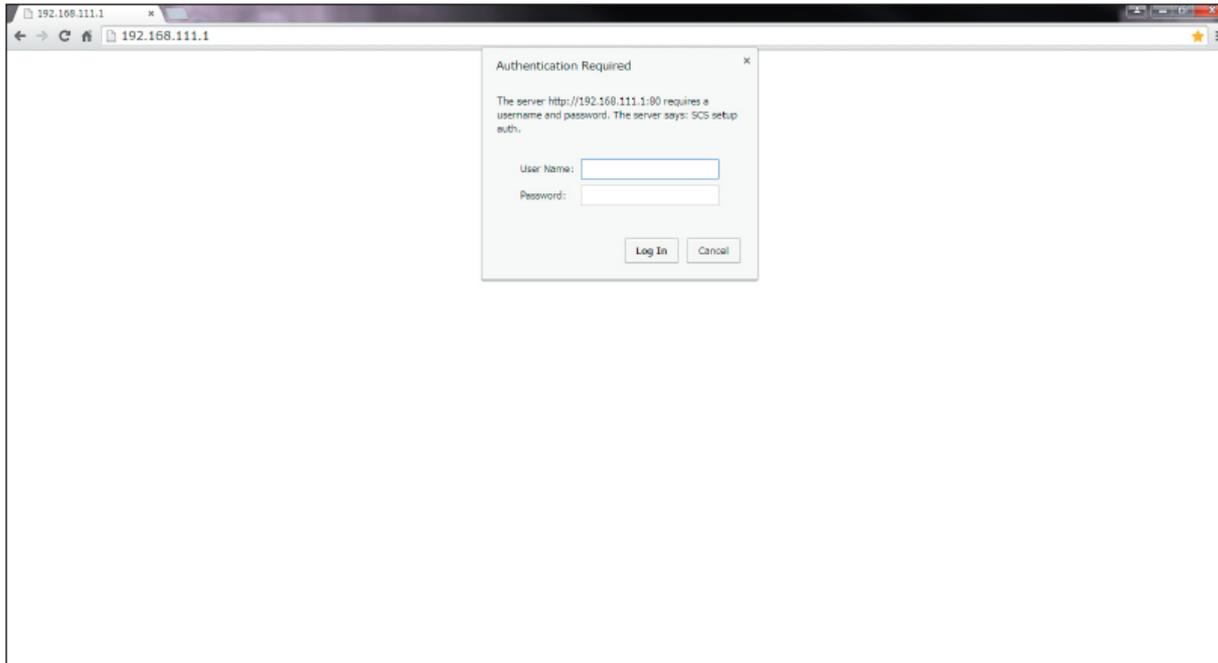


5. The Top Page appears. Click [System Config] on the left side of the window.

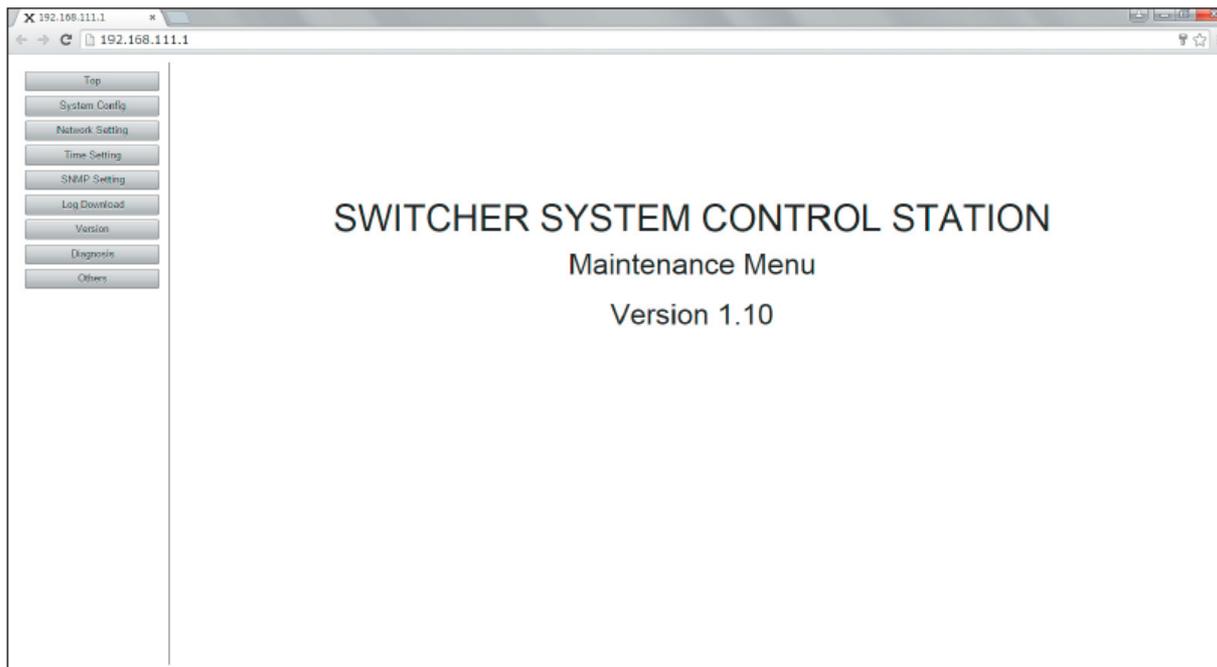

- System Config window, click [Configure] in the unit to be set. In this case Unit 2

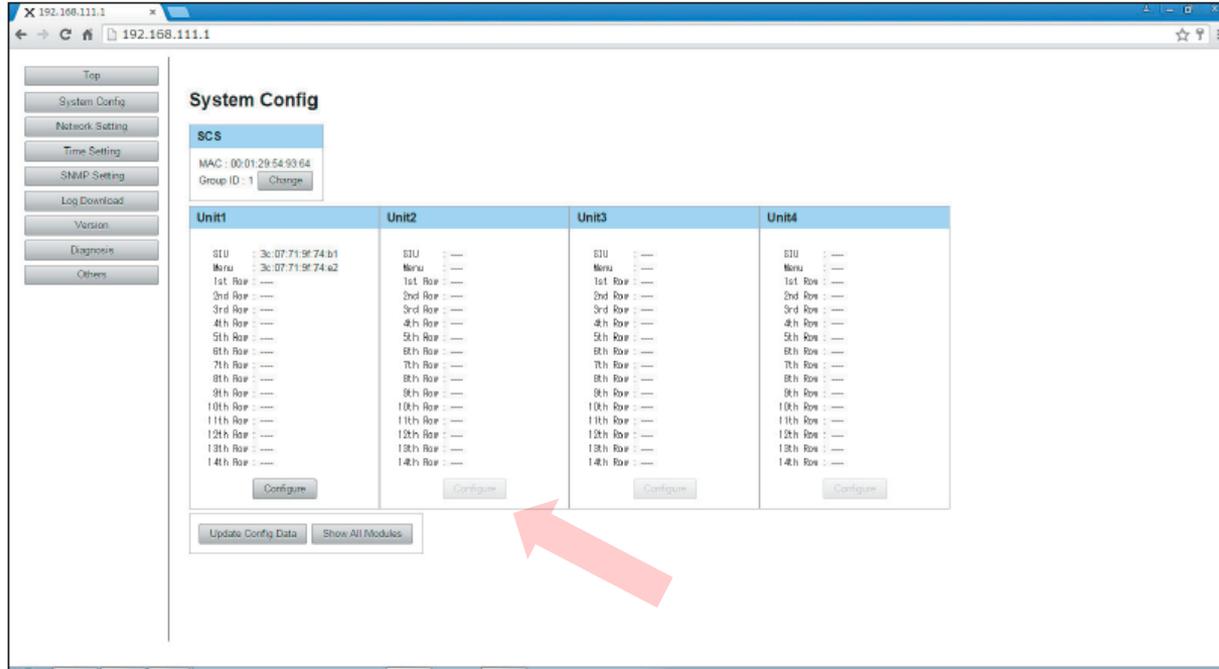

- On the System Config window, click [Configure] in the unit to be set. In this case Unit 2

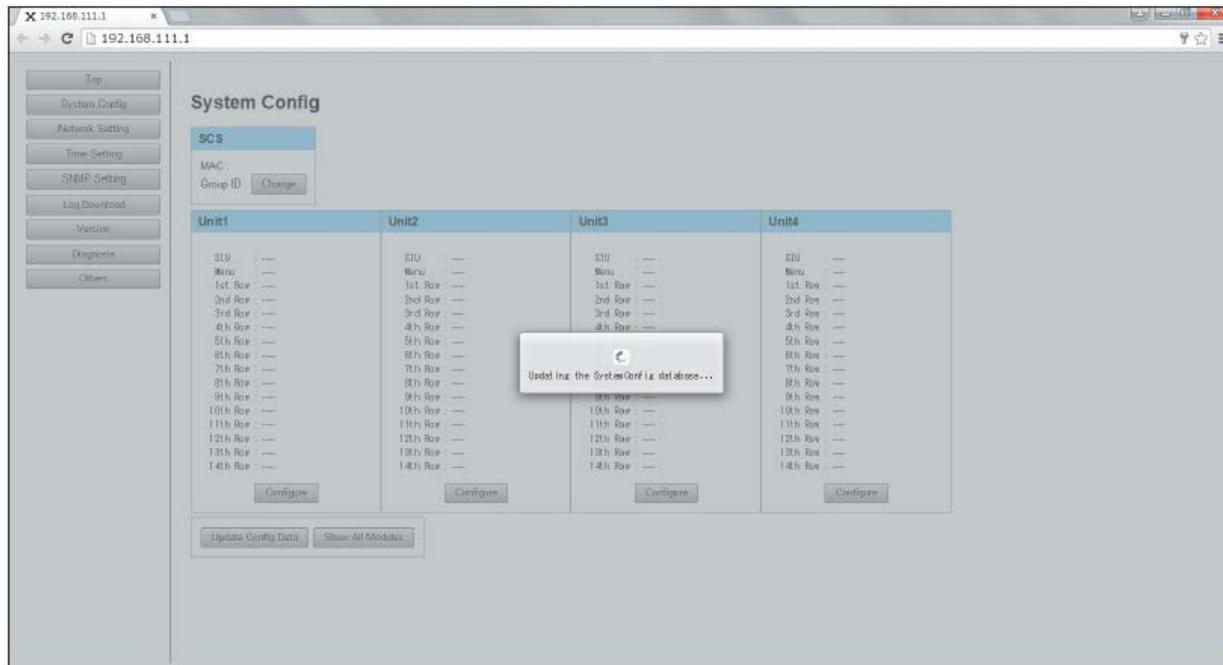

- Assign the new modules as rows, same as main panel

(2) The setting window opens.

The screenshot shows a window titled "Unit1 Config". On the left side, there are 14 rows, each labeled "1st Row" through "14th Row" followed by a colon and an empty rectangular input box. To the right of these rows are two vertical arrows: a top arrow pointing right and a bottom arrow pointing left. On the right side of the window, there is a panel titled "Available Modules" with a blue header. Below the header, there is a list of three MAC addresses: "3c:07:71:9f:74:6e", "3c:07:71:9f:74:60", and "3c:07:71:9f:74:6d". At the bottom of the window, there are three buttons: "Apply", "Reset", and "Cancel".