


UDA-200 & UDA-300

Wednesday, May 16, 2007

Note: each of the four "D" connectors provide connections for router eight inputs or outputs only.



4) Utah supplied audio cables connect one end to a "D" connector on the breakout panel and the other end to the corresponding router input or output "D" connector.

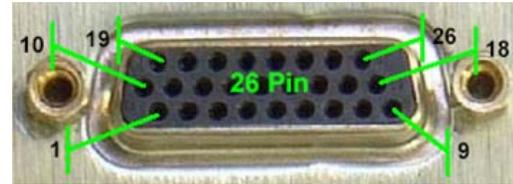

DIN connector attaches to the Monitor/Reference connector on the UTAH-200 chassis




Inputs Only

Outputs Only



Reference/Monitor Connectors

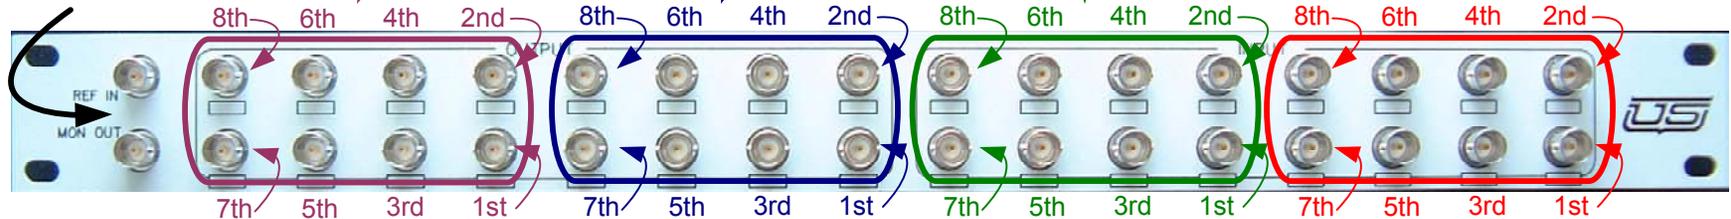

Note: The numbering on each set of eight BNC's indicate which input or output the BNC is connected too. For example: If the far right (red) set of eight were connected to the "D" connector on the router for inputs 00 to 07, the BNC labeled "1st" would be connected to Input 00, "2nd" would be input 01 and so forth.