




# UTAH-400 Expandable V-288 Frame Side View

Wednesday, May 16, 2007


Note: one terminator needs to be installed on each side of the top chassis and one jumper on each side between all chassis in the stack.

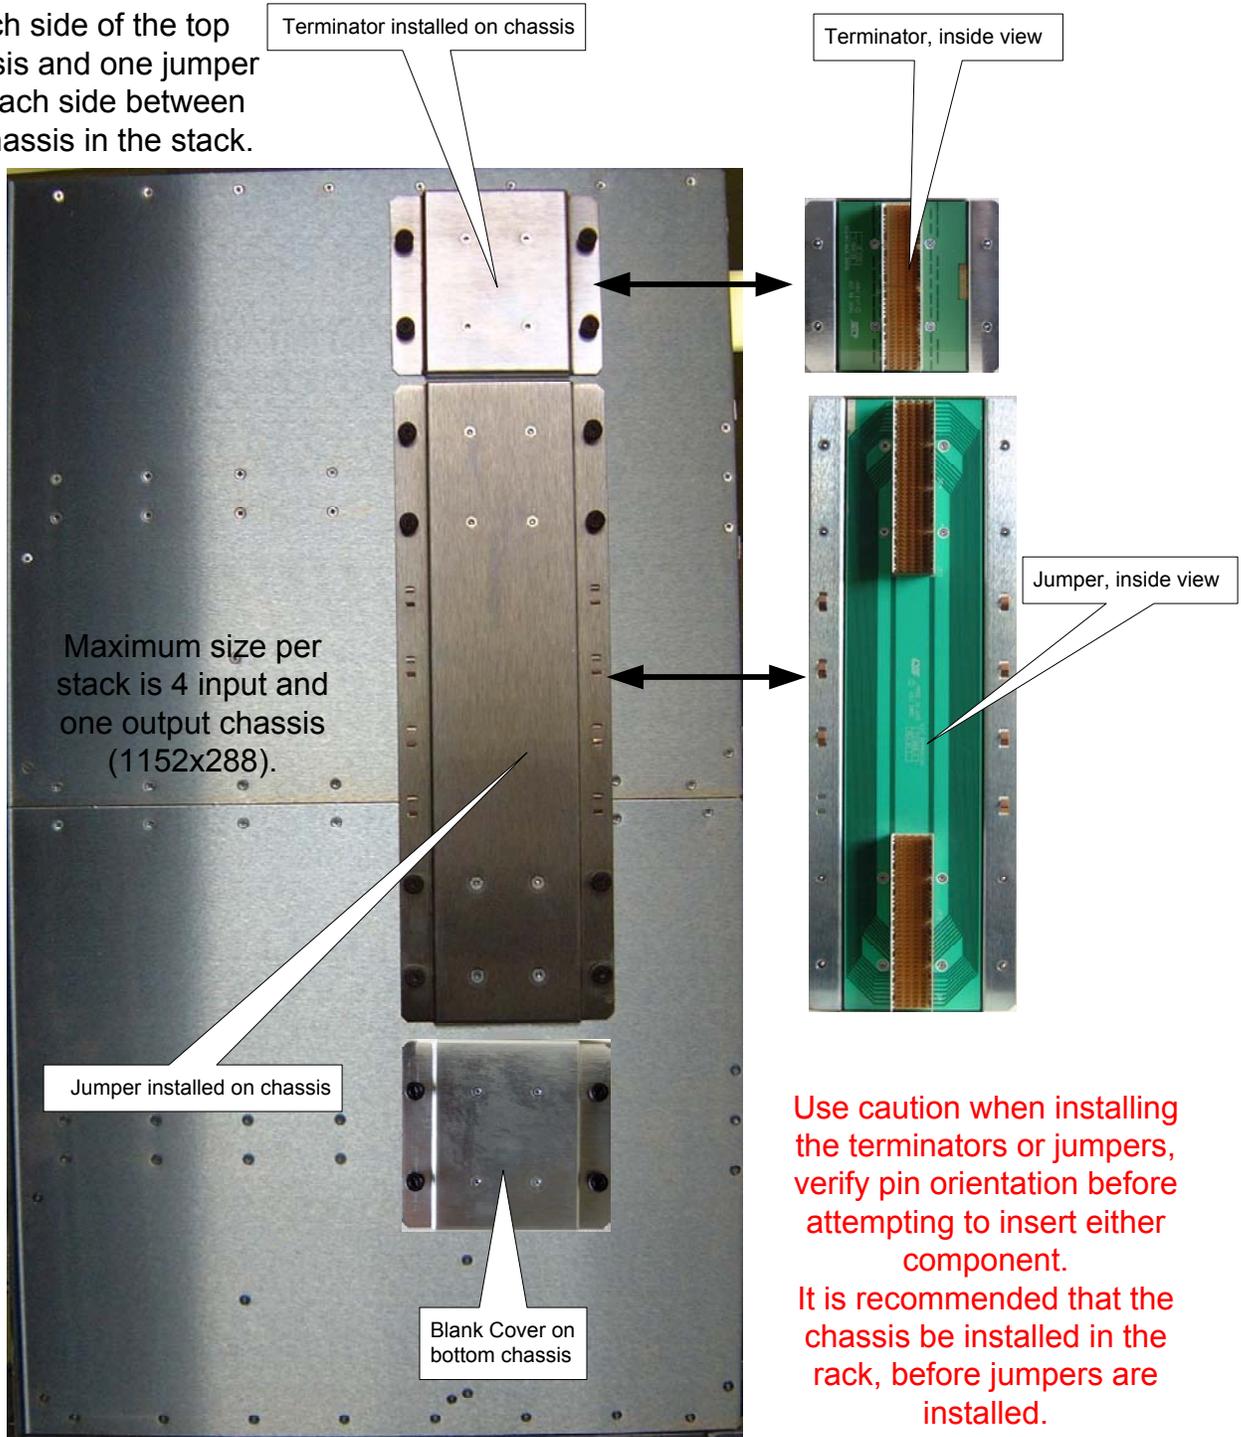

Use caution when installing the terminators or jumpers, verify pin orientation before attempting to insert either component. It is recommended that the chassis be installed in the rack, before jumpers are installed.

# UTAH-400 Expandable V-288 Frame Front View


Wednesday, May 16, 2007

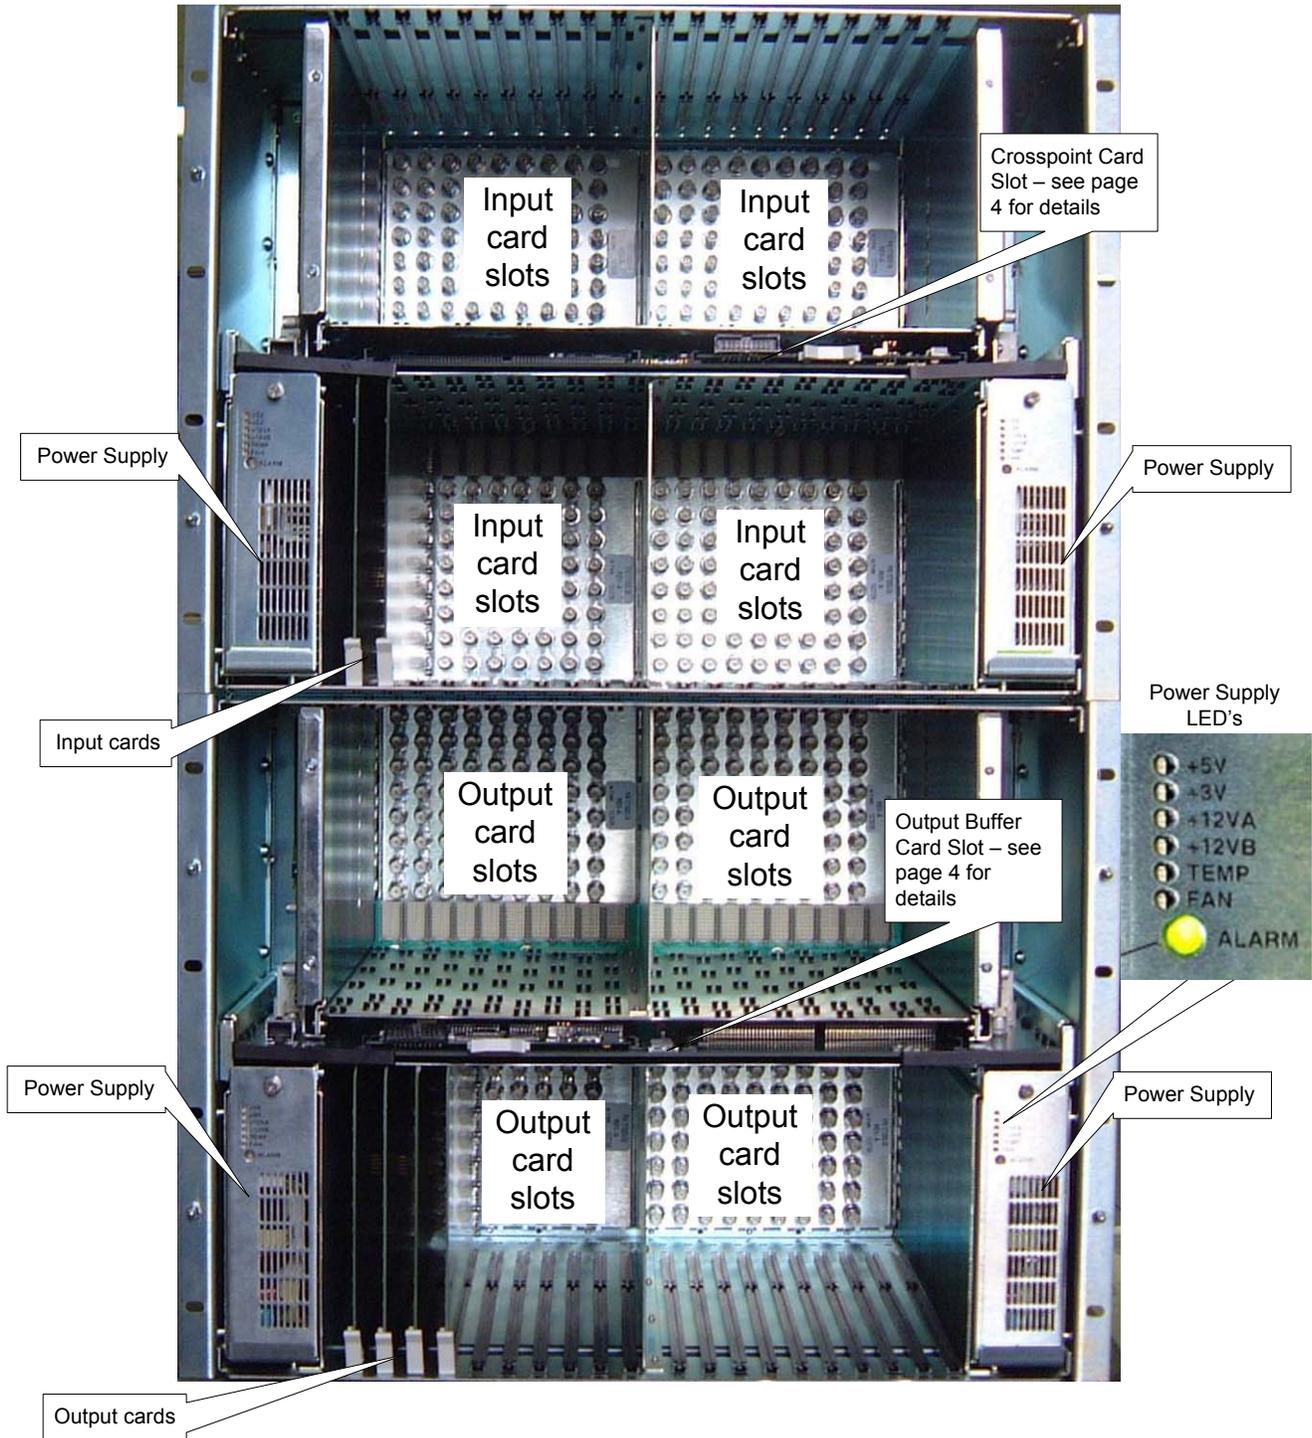

# Crosspoint, Buffer and FPGA Card Details

Wednesday, May 16, 2007

## Crosspoint Card

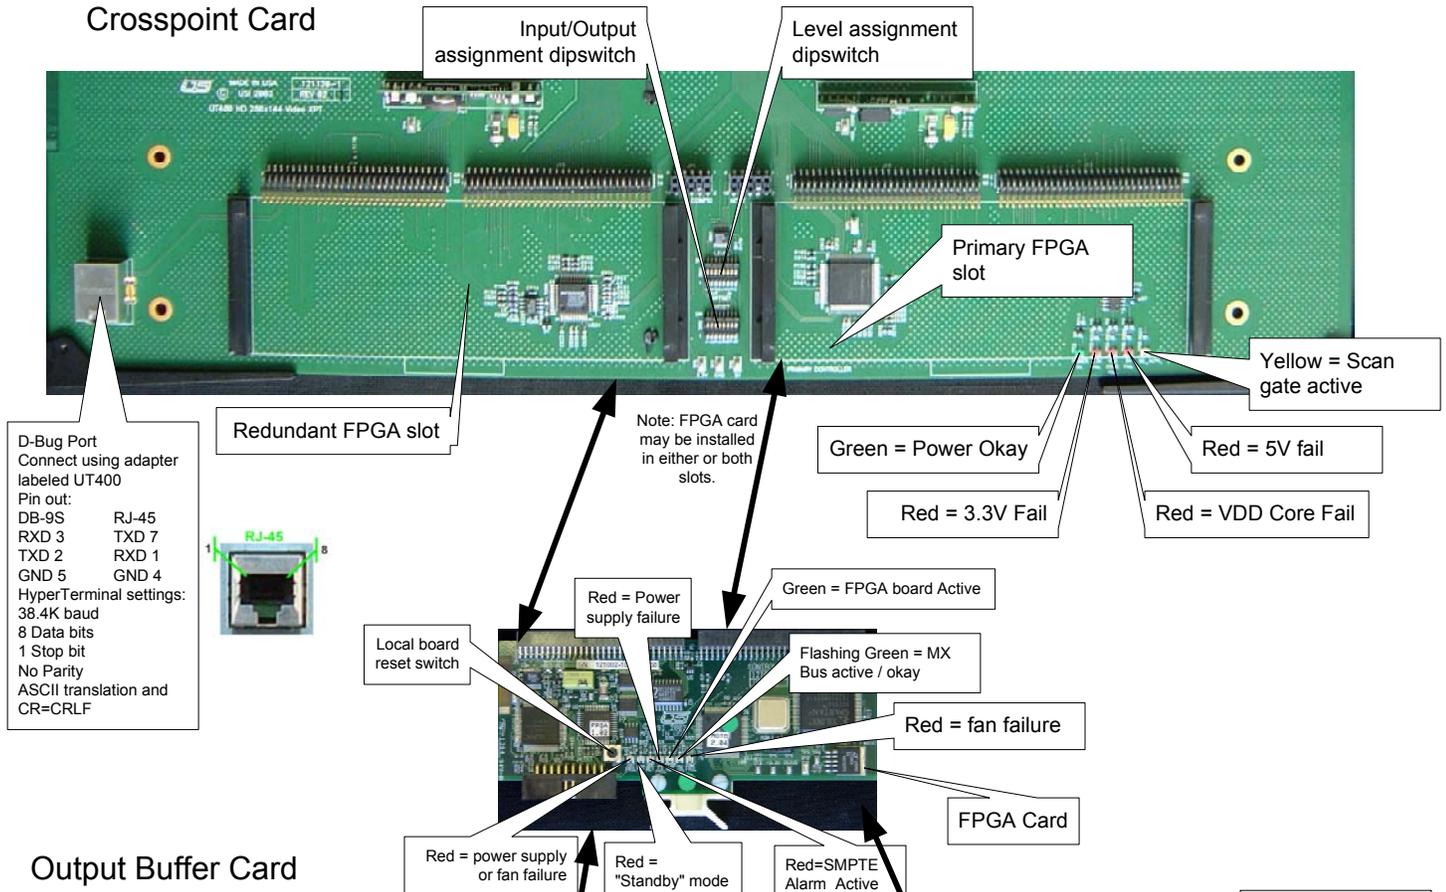

## Output Buffer Card

