



UTAH-400 Non-Expandable V-288 Frame Rear View

Wednesday, May 16, 2007

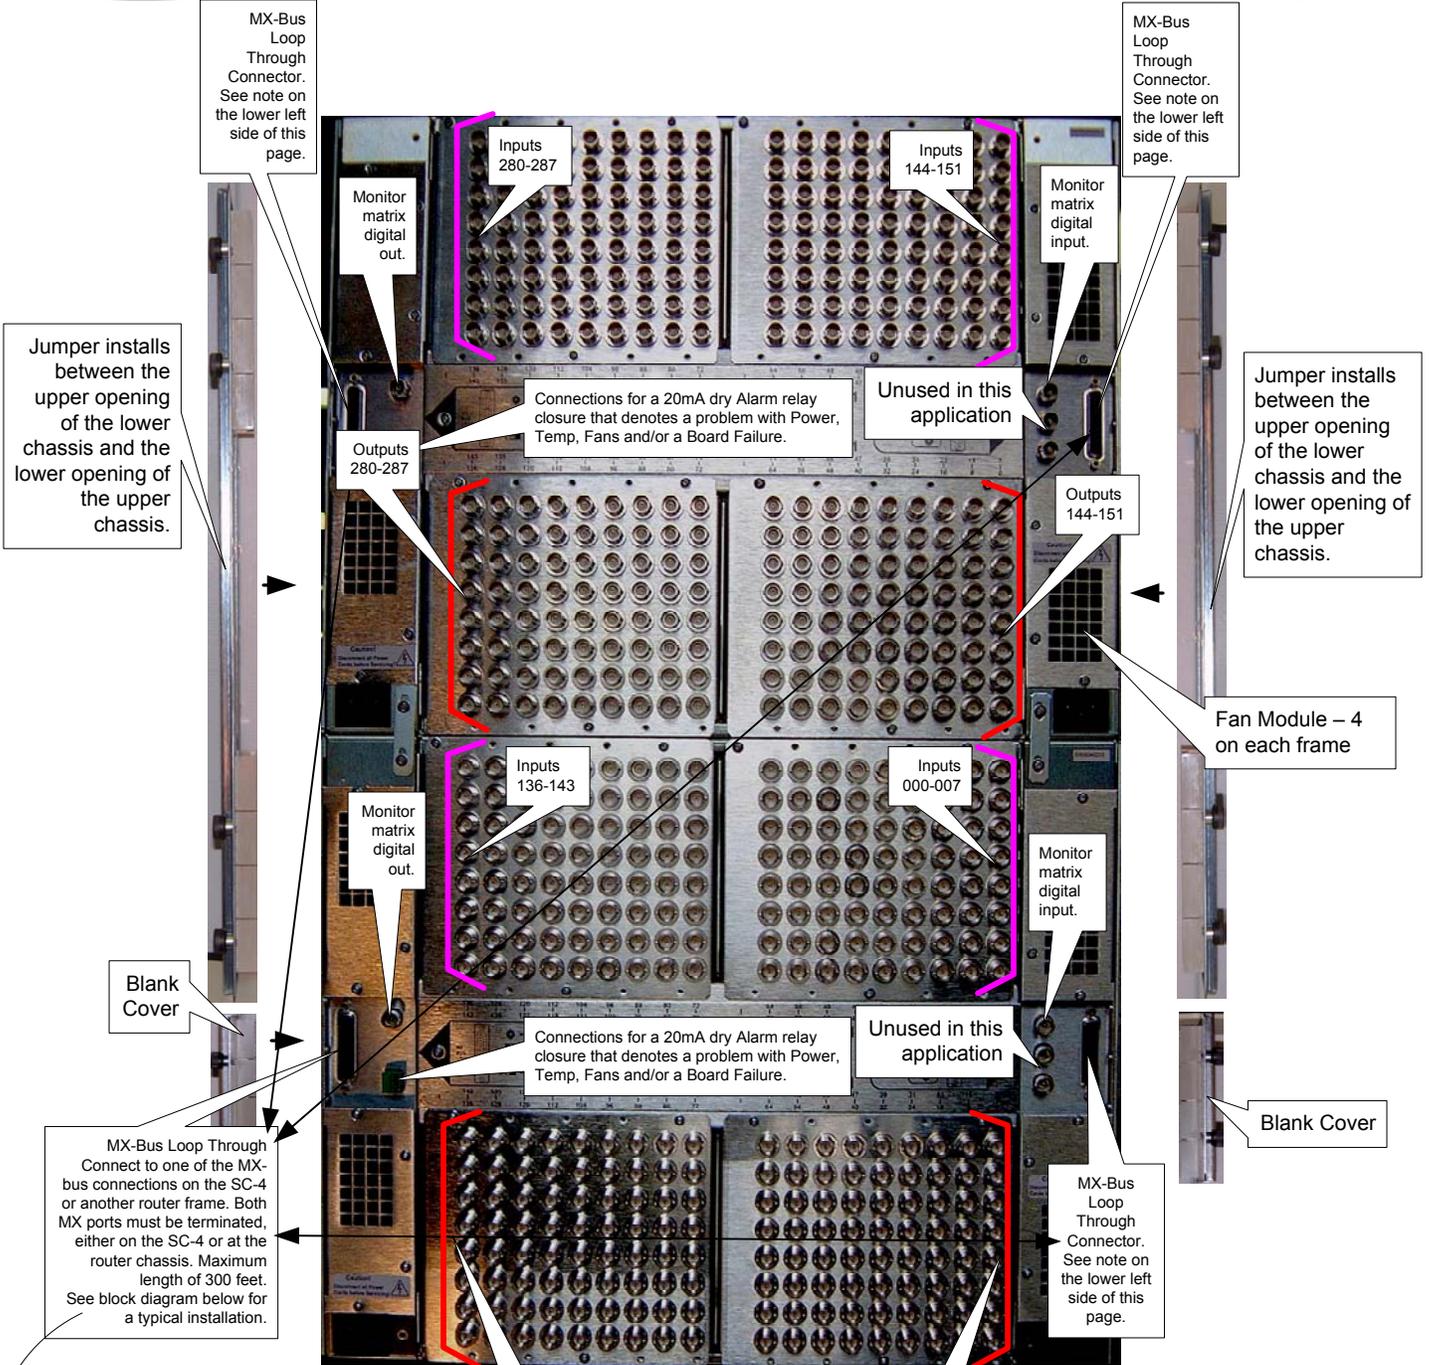


MX-Bus Loop Through
Connect to one of the MX-bus connections on the SC-4 or another router frame. Both MX ports must be terminated, either on the SC-4 or at the router chassis. Maximum length of 300 feet. See block diagram below for a typical installation.

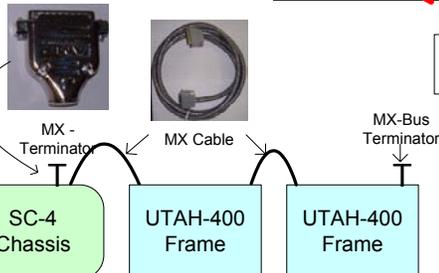

UTAH-400 Non-Expandable V-288 Frame Side View

Wednesday, May 16, 2007


Note: one terminator and one jumper needs to be installed on each side of the chassis'.

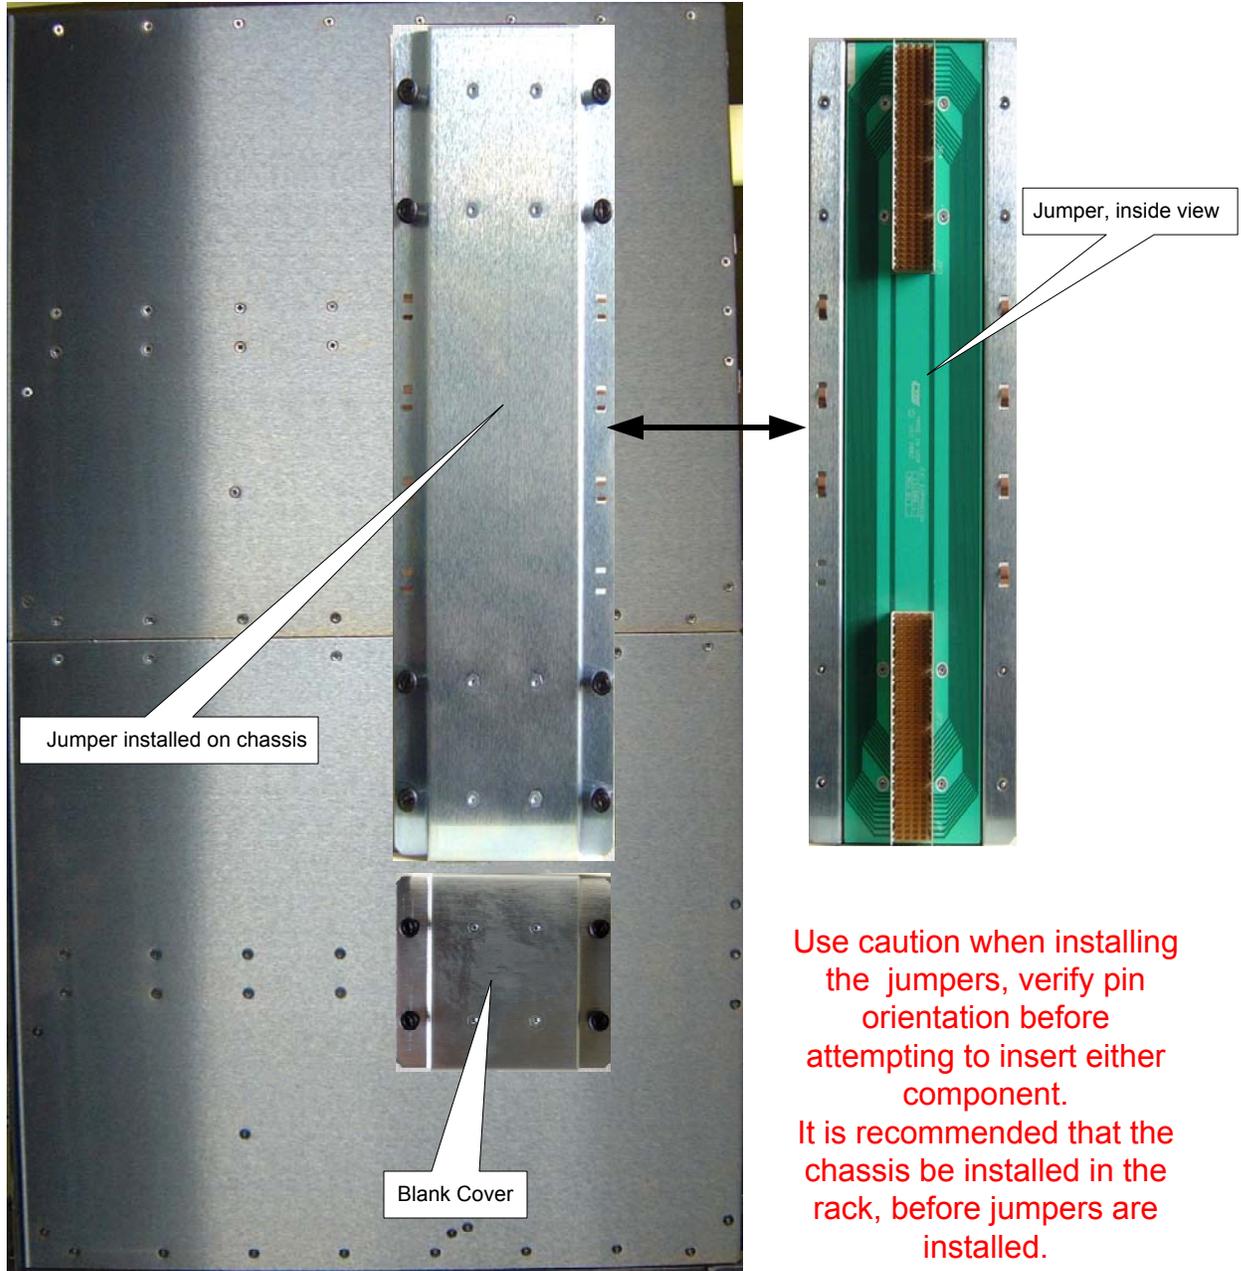

Use caution when installing the jumpers, verify pin orientation before attempting to insert either component. It is recommended that the chassis be installed in the rack, before jumpers are installed.

UTAH-400 Non-Expandable V-288 Frame Front View

Wednesday, May 16, 2007

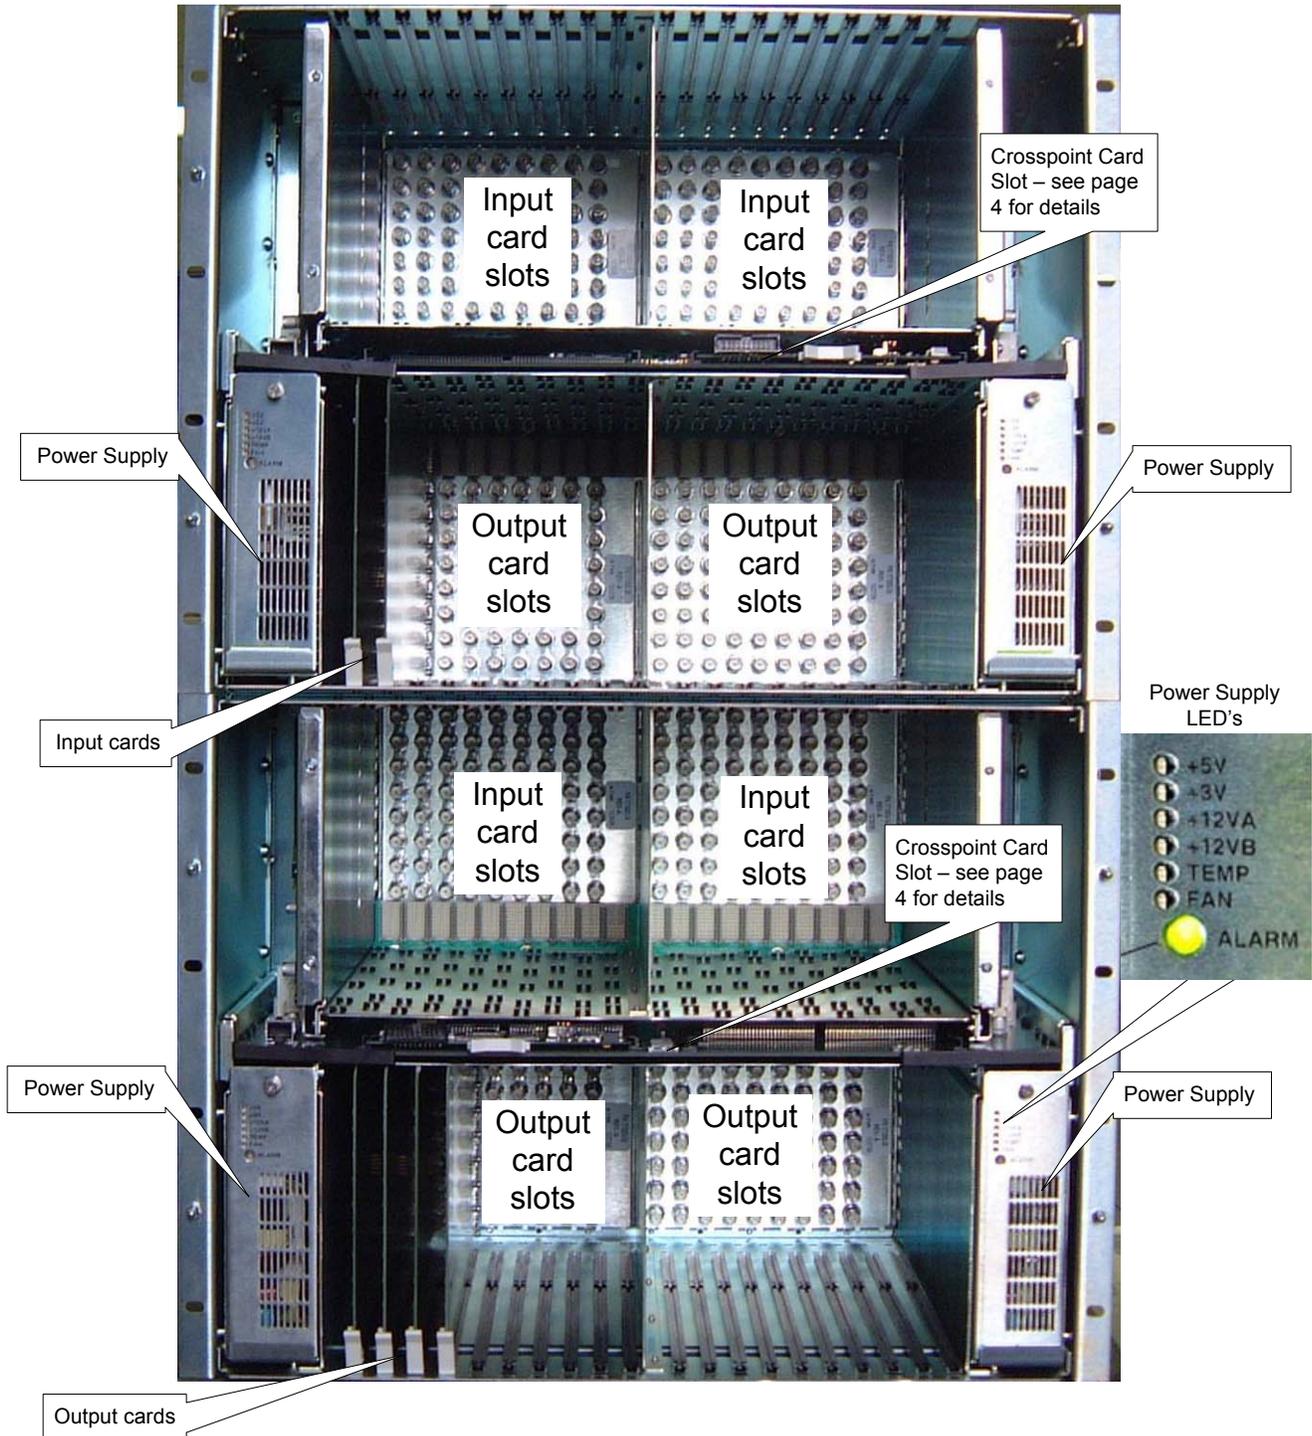

Crosspoint Card and Control Card Details

Wednesday, May 16, 2007

