
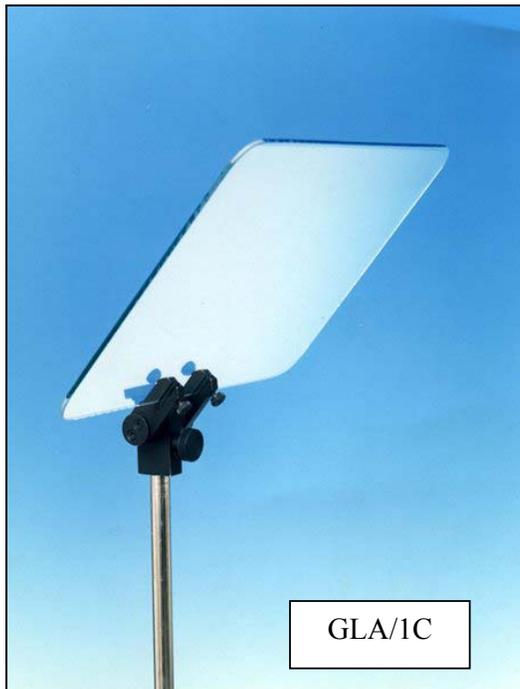



The Base is shipped Fully assembled  
Loosen thumbscrews (A) and (B) to put them into the position shown.

Rods (C) and (D) can be Loosened by turning anticlockwise this allows them to slide closer together on the Extrusion (E) for smaller prompt monitors.

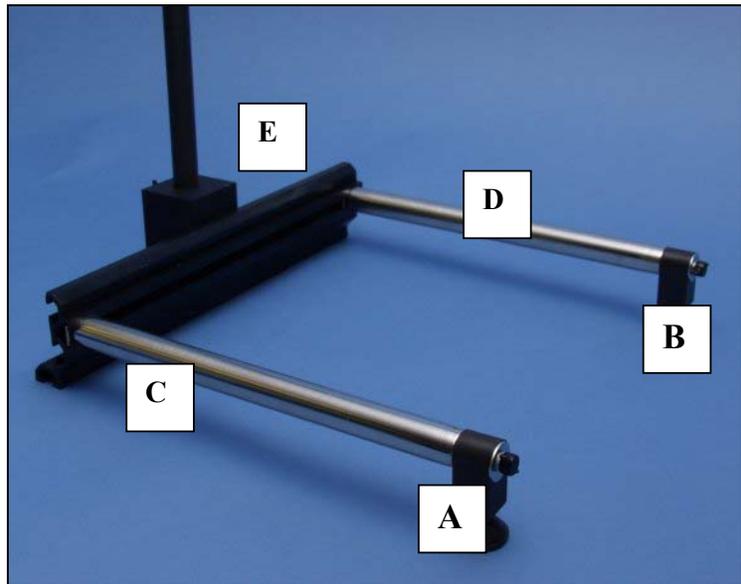

The Glass support is shipped in two pieces the inner rod (F) can be lengthened by screwing both parts together for a standing Speaker or by using only one piece for a sitting speaker, one inner rod is already fitted inside the lower tube (G) This is fitted into Block (H) And tighten thumbscrews.

The monitor is mounted on its back on the Base as shown. The video feed is connected to 'video in' on the back of the monitor.

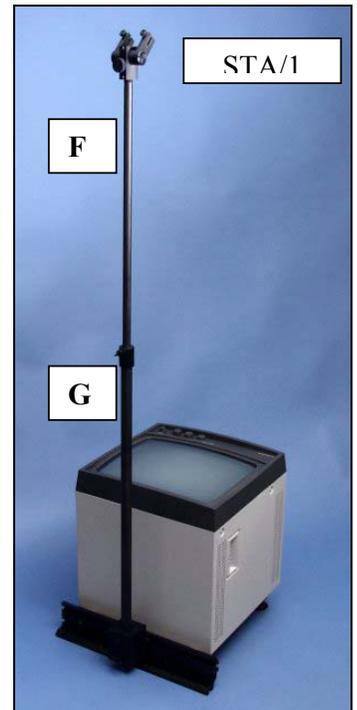

The Glass is fitted at 45 degrees to the monitor to reflect the script towards the Reader.

