


Telex® Technical Data

Models WP-1, WP-2 and WP-3 Wall Plates

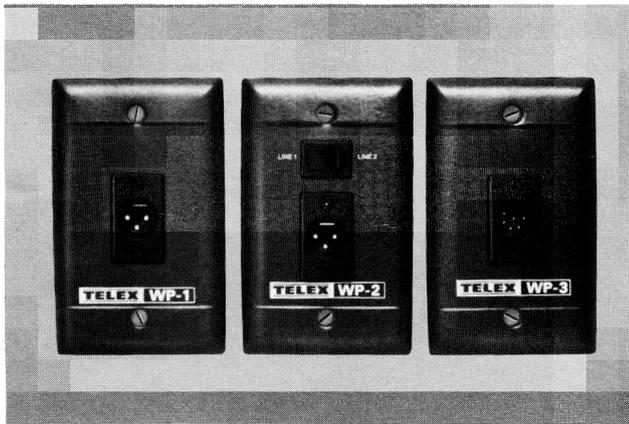

General Description

The WP-1, WP-2 and WP-3 Wall Plates may be installed at any location to provide belt-pack access to an Audiocom® intercom system. Each wall plate mounts in a standard, single-gang electrical box.

WP-1 and WP-2 Wall Plates

The WP-1 and WP-2 are designed for use with the BP-1000 single-channel belt pack. The WP-1 provides continuous access to a single intercom channel. The WP-2 has a switch to access either of two intercom channels.

WP-3 Wall Plate

The WP-3 is designed for use with the BP-2000 two-channel belt pack. The WP-3 provides continuous access to two intercom channels.

Specifications

Dimensions

See drawing


Connectors

WP-1 and WP-2: 3-pin male XLR

WP-3: 6-pin male XLR

Construction

Stainless steel finished in non-glaring black.

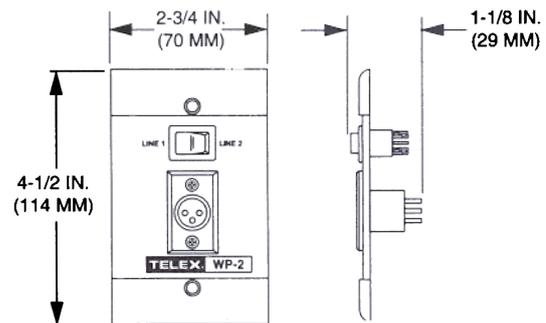

Dimensions (WP-2 Shown)

Architect's and Engineer's Specifications

The WP-1/WP-2/WP-3 shall be a stainless steel powdercoat black wall plate which shall install in a standard, single-gang electrical box and which shall provide belt-pack access to an Audiocom® intercom system. The WP-1 shall provide continuous access to a single intercom channel. The WP-2 shall have a two-position switch to access either of two intercom channels. The WP-3 shall provide continuous access to two intercom channels.

Ordering Information

Model WP-1 Continuous Single-Channel Wall Plate
Model WP-2 Switchable Two-Channel Wall Plate .
Model WP-3 Continuous Two-Channel Wall Plate .

96136-000
96136-001
96136-002

© Telex Communications, Inc.: May 1995

TELEX

Telex Communications, Inc. • 9600 Aldrich Ave. So. • Minneapolis, MN 55420 U.S.A.

Specifications subject to change without notice.

38109-341 Rev A

Litho in U.S.A. 5/95