

Technical Data Sheet

Model PH-700 and PH-700R Hard-Hat Headset (Hard-Hat not included)



The model PH-700 / PH-700R microphone headset gives workers the ability to communicate in a loud, hardhat-restricted environment. The padded earmuffs not only give a comfortable fit, but they also act as a seal around the ear to keep out unwanted noise. This headset is perfect for use at construction sites and in manufacturing facilities. The headset clips onto any standard size hardhat.

Key Features:

- Versatile hardhat clip-on headset.
- 360° radial arm attached microphone with adjustable mid and mouthpiece bends allowing for personal settings.
- High performance noise-canceling dynamic microphone can be reversed for wear on either side of the head.
- Adjustable, cushioned earmuffs for comfort.

Specifications

Headphone:

Frequency Response 50 Hz to 15 kHz
Impedance 150 Ohms
Sensitivity 92 dB

Microphone:

Element Type Dynamic
Frequency Response 200 Hz to 7 kHz
Sensitivity -66 dB
Impedance 150 Ohms

Cordage:

Straight 1.22 m (4ft.)


Weight:

Gross Weight (approx.) 12 oz. (without cable)

Parts List


Item No.	Description	Qty.	Part No.
1	4 pin XLR female connector	1	35320-004
2	4 pin XLR male connector	1	35398-004

Wiring Diagram

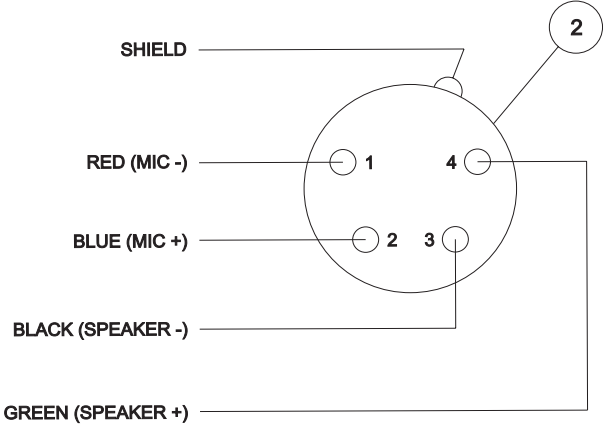

-000

4 PIN FEMALE
VIEWED FROM BACK

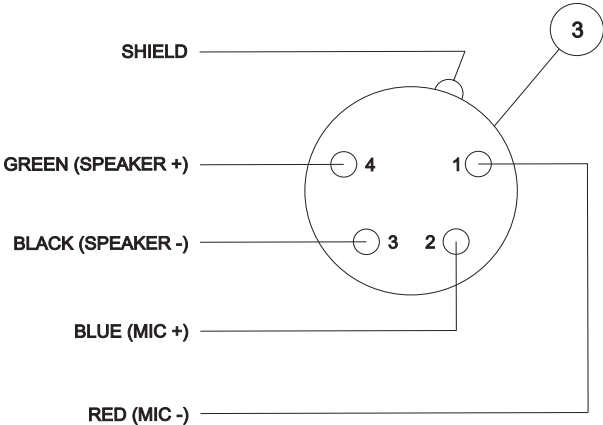

-001

4 PIN MALE
VIEWED FROM BACK

PH-700

Ordering Information

PH-700	Hard-Hat Headset, 4 pin female connector	Catalog no. 301357-000
PH-700R	Hard-Hat Headset, 4 pin male connector	Catalog no. 301357-001

TELEX®