

## Technical Data Sheet

### Model PH-700 and PH-700R Hard-Hat Headset (Hard-Hat not included)



The model PH-700 / PH-700R microphone headset gives workers the ability to communicate in a loud, hardhat-restricted environment. The padded earmuffs not only give a comfortable fit, but they also act as a seal around the ear to keep out unwanted noise. This headset is perfect for use at construction sites and in manufacturing facilities. The headset clips onto any standard size hardhat.

#### Key Features:

- Versatile hardhat clip-on headset.
- 360° radial arm attached microphone with adjustable mid and mouthpiece bends allowing for personal settings.
- High performance noise-canceling dynamic microphone can be reversed for wear on either side of the head.
- Adjustable, cushioned earmuffs for comfort.

## Specifications

#### Headphone:

Frequency Response ..... 50 Hz to 15 kHz

Impedance ..... 150 Ohms

Sensitivity ..... 92 dB

#### Microphone:

Element Type ..... Dynamic

Frequency Response ..... 200 Hz to 7 kHz

Sensitivity ..... -66 dB

Impedance ..... 150 Ohms

#### Cordage:

Straight ..... 1.22 m (4ft.)


#### Weight:

Gross Weight (approx.) ..... 12 oz. (without cable)

## Parts List


Item No.	Description	Qty.	Part No.
1	4 pin XLR female connector	1	35320-004
2	4 pin XLR male connector	1	35398-004

# Wiring Diagram

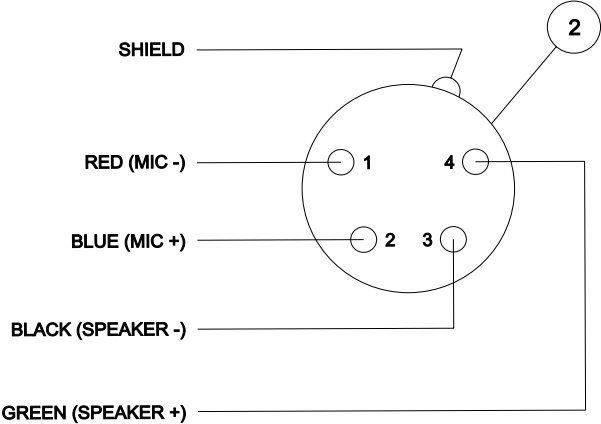

**-000**

4 PIN FEMALE  
VIEWED FROM BACK

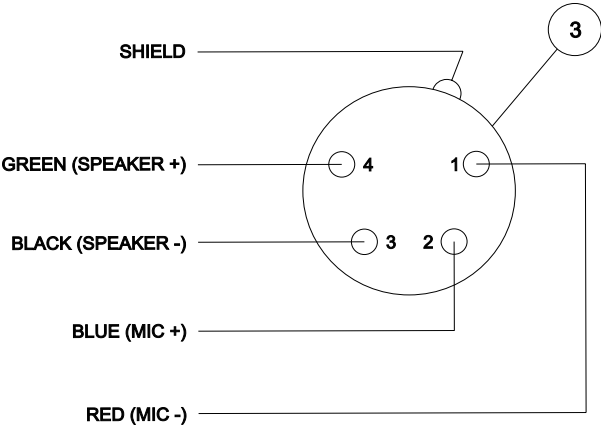

**-001**

4 PIN MALE  
VIEWED FROM BACK

PH-700

## Ordering Information

PH-700	Hard-Hat Headset, 4 pin female connector	Catalog no. 301357-000
PH-700R	Hard-Hat Headset, 4 pin male connector	Catalog no. 301357-001

**TELEX®**