


J-5

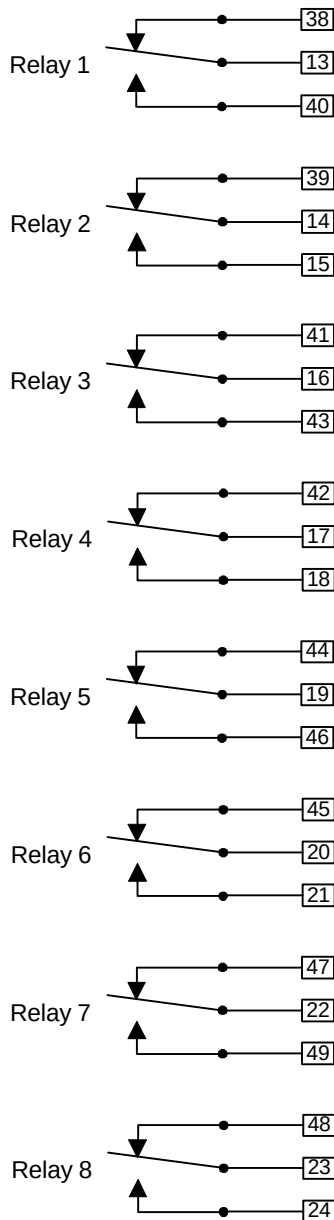


* Relays shown in non-activated state

Contact Ratings:
.5A @ 120 vac
.3A @ 60 vdc
1A @ 24 vdc

UIO-256 GPI Relay Contacts Connector Pin-Out J-5



J-5

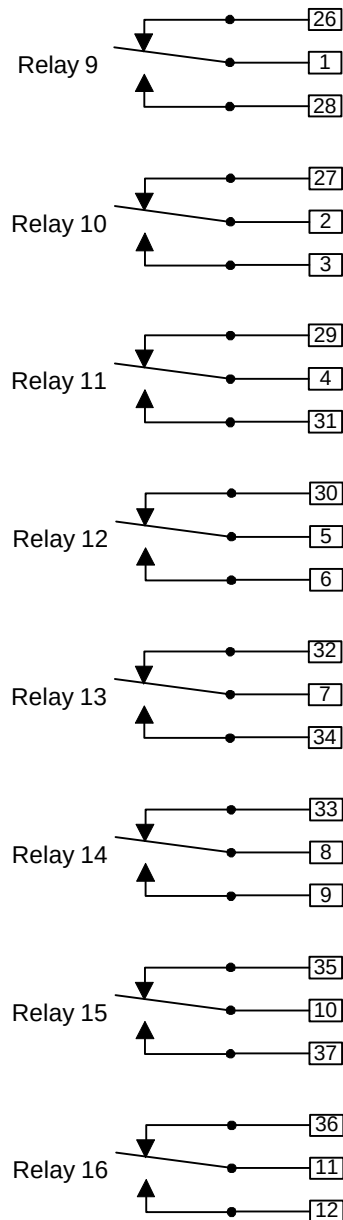

UIO-256 GPI External Inputs Connector Pin-Out J-7

J-7

GPI-1	34	Control +
	9	Control -
GPI-2	35	Control +
	10	Control -
GPI-3	36	Control +
	11	Control -
GPI-4	37	Control +
	12	Control -
GPI-5	38	Control +
	13	Control -
GPI-6	39	Control +
	14	Control -
GPI-7	40	Control +
	15	Control -
GPI-8	41	Control +
	16	Control -
GPI-9	26	Control +
	1	Control -
GPI-10	27	Control +
	2	Control -
GPI-11	28	Control +
	3	Control -
GPI-12	29	Control +
	4	Control -
GPI-13	30	Control +
	5	Control -
GPI-14	31	Control +
	6	Control -
GPI-15	32	Control +
	7	Control -
GPI-16	33	Control +
	8	Control -
Control Voltage	18	+18 v
	19	
	20	
	21	
	22	Ground
	24	
	25	

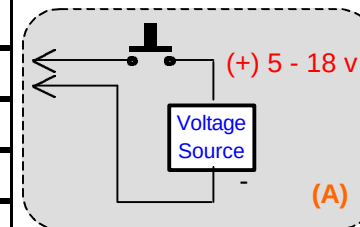

Example "A" shows interconnection of external control voltage source. Example "B" shows control via internal 18 volt source.