

VFR-7210
Video DA Mounting Frame
User Manual

VFR-7210 • Video DA Mounting Frame – User Manual

- Ross Part Number: **7210-VFR-04**
- Document Issue: **4**
- Printing Date: July 3, 2003. Printed in Canada.

The information contained in this guide is subject to change without notice or obligation.

Copyright


© 2003 **Ross Video Limited**. All rights reserved.

Contents of this publication may not be reproduced in any form without the written permission of Ross Video Limited. Reproduction or reverse engineering of copyrighted software is prohibited.

Notice

The material in this guide is furnished for informational use only. It is subject to change without notice and should not be construed as commitment by Ross Video Limited. Ross Video Limited assumes no responsibility or liability for errors or inaccuracies that may appear in this manual.

Trademarks

-  is a registered trademark of Ross Video Limited.
- Ross, ROSS, ROSS® and RossGear are registered trademarks of Ross Video Limited.
- All other product names and any registered and unregistered trademarks mentioned in this guide are used for identification purposes only and remain the exclusive property of their respective owners.

Company Address



Ross Video Limited
8 John Street
Iroquois, Ontario, K0E 1K0
Canada

Ross Video Incorporated
P.O. Box 880
Ogdensburg, New York
USA 13669-0880

General Business Office: (+1) 613 • 652 • 4886

Fax: (+1) 613 • 652 • 4425

Customer Service: (+1) 613 • 652 • 4886

E-mail (Customer Support): tech-support@rossvideo.com

E-mail (General Information): solutions@rossvideo.com

Website: <http://www.rossvideo.com>

After hours emergency: (+1) 613 • 652 • 4886, ext. 333

RossGear Terminal Equipment • Warranty and Repair Policy

This **RossGear Terminal Equipment** product is warranted to be free of any defect with respect to performance, quality, reliability and workmanship for a period of FIVE (5) years from the date of shipment from our factory.

In the event that your **RossGear** product proves to be defective in any way during this warranty period, we will gladly repair or replace this piece of equipment with a unit of equal or superior performance characteristics.

Should you find that this **RossGear** product has failed after your warranty period has expired, we will repair your defective piece of equipment for as long as suitable replacement components are available. You, the owner, will bear any labor and/or component costs incurred in the repair or refurbishment of said equipment, beyond the **FIVE (5)** year warranty period.

Should your **RossGear** product be of our **Digital Terminal Equipment** product line, a power supply, or product with surface mount devices, and it proves to be defective, we would ask that an authorized **Ross Video Limited** factory representative repair the product. Any attempt to repair this product by anyone other than an authorized **Ross Video Limited** factory representative, will void your warranty.

If this is a manual for a **RossGear** product of our **Digital Terminal Equipment** product line, a power supply, or piece of equipment that carries surface mount devices, you will find it provides all pertinent information for the safe installation and operation of your **RossGear** product.

If this is a manual for a **RossGear** product from our **Analog Terminal Equipment** product line, you will find it provides all pertinent information for the safe installation and operation of your **RossGear** product. Included in this manual (if this product does not carry any surface mount devices) you will also find schematics, bills of materials and layout drawings. These are provided for your convenience, should you find it necessary to perform discretionary field repair or modifications to your **RossGear** product.

Ross Video Limited reserves the right to assess any modifications or repairs made by you and decide whether they fall within warranty limitations, should you decide to return your **RossGear** product for repair.

In no event shall **Ross Video Limited** be liable for direct, indirect, special, incidental, or consequential damages (including loss of profits) incurred by the use of this product. Implied warranties are expressly limited to the duration of this warranty.

IN CASE OF PROBLEMS:

Should any problem arise with your **RossGear Terminal Equipment Product**, please contact our **Customer Service Department** at **613-652-4886**, 24 hours a day, 7 days a week.

A Return Material Authorization number (RMA) will be issued to you, as well as specific shipping instructions, should you wish our factory to repair your **RossGear** product. A temporary replacement, if required, will be made available for a nominal charge. Any shipping costs incurred, will be the responsibility of you, the customer. All products shipped to you from **Ross Video Limited**, will be shipped collect.

RossGear Terminal Equipment product advice is available, without charge, for the life of this equipment.

Introduction

The VFR-7210 Video Products Frame accommodates up to ten Ross 7000 series Distribution Products. The frame employs rugged aluminum construction, which provides superb heat dissipation, as well as the highest quality connectors and a durable finish. Additionally, carefully placed ventilation holes in the rack frame, sides and door guarantees that your Distribution Products will run cooler than in competitive frames.

Features


- Accommodates 10 amplifiers in 2 rack units
- Aluminum construction for increased heat dissipation
- Removable frame door for accessibility
- Optional module extender for servicing
- Power switch and fuse is accessible from front of the rack frame
- *PowerLock* cord retainer mechanism guards against accidental power loss
- 5-year transferable warranty
- Ross frames also accept Leitch* analog video products

Installation

1. Mechanical

The frame mounts in the rack cabinet by means of four screws through the front mounting flanges. This should normally be sufficient to carry the load, including weight of cables. In some cases, (mobile trucks, etc.) it may be desirable to also support the rear of the frame. Rear support brackets (Ross part # FSB-7110) are available for a nominal cost.

To Install the support brackets:

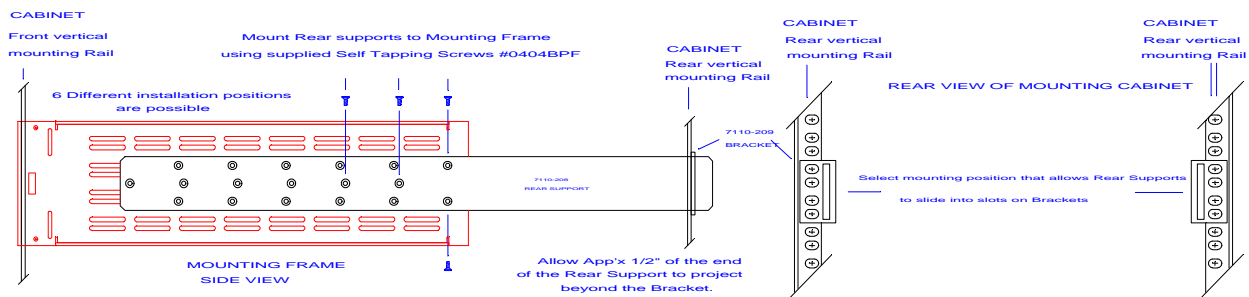

A) The rear support bars can be attached to the Ross frame in six possible positions. See the illustration. Choose the position that suits the cabinet depth and will give approximately a 1/2 inch projection beyond the previously mounted bracket. Using four screw per bracket as shown in the illustration, attach both bars.

B) Mount the Ross frame to the front rails of the rack cabinet using rack screws.

C) At the rear of the cabinet, slide the bracket slots over the rear of the support bars and secure to the cabinet rear rails with rack screws.

*Leitch is a trademark of Leitch Technology International Inc.

2. Ventilation

This frame has been specially engineered to minimize internal heat buildup and thus improve module reliability. However, it is best to install a blank panel above and below the frame for improved air flow. In situations where this much rack space is not available, no more than two frames are to be stacked without a blank panel above and below the pair.

Specifications

Rack Frame Mechanical	Height 3½" (88mm)
	Width 19" (483mm)
	Depth 13" (330mm)
	Weight, average for all amplifiers installed: approx. 13 lbs. (5.9kg)
	For safety reasons, Ross power supplies do not fit into rack frames of other manufacturers.
Environmental	Temperature Equipment is designed to operate in ambient temperature ranges from 0° C to 50° C
	Humidity <95% non condensing

Ordering Information

VFR-7210	Video DA Mounting Frame (2 RU, Holds 10 amplifiers)
PS-7103	Power Supply (85-250 volts)
EXT-7200	Extender Board
FSB-7110	Rear Support Brackets
7210-VFR-04	Additional Owner's Manual for Video Distribution Products

Note: The video frame does not include power supplies. The frame requires one or two supplies, the second supply for redundancy. One Owner's Manual is supplied with each frame.

Bill of Materials
FRAME, 2 R.U., ANALOG VIDEO

7210A-010 Issue: 2

Item	Part No.	Description	Qty
1	7110-201-03	Side	2
2	7110-202-03	Door	1
3	7110-203-03	Top	1
4	7110-204-03	Adaptor Plate	1
5	7110-206-03	Shield Plate	1
6	7210A-001	Frame Mother PCB Assembly	1
7	7210-084-01	Label, Power Supply Type (MAROON)	1
8	8110-204-03	Bottom	1
9	8110-206-03	Shield Plate	1
10	312-063	Latch, Slide	2
11	398-006	Guide, PCB, 9" (Glue Type)	4
12	398-007	Guide, PCB, 8"	20
13	466-017	Lens, Reflective, Clear	2
14	613-016-01	Label, Serial #	1
15	650-005	Nut, Hex, Keps, 4-40	2
6	850-008	Screw, 4-40 x 3/8" Flat	1
17	850-039	Screw, 4-40 x 1/4" Flat, Phillips	24
18	957-003	Tape, Adhesive, 3M/4920	20

Bill of Materials
FRAME, 2 R.U., ANALOG VIDEO

7210A-010 Issue: 3

Item	Part No.	Description	Qty
1	7110-201-03	Side	2
2	7110-202-03	Door	1
3	7110-203-04	Top	1
4	7110-204-03	Adaptor Plate	1
5	7110-206-03	Shield Plate	1
6	7110-210-01	Sacer	1
7	7210A-001	Frame Mother PCB Assembly	1
8	7210-084-01	Label, Power Supply Type (MAROON)	1
9	8110-204-04	Bottom	1
10	8110-206-03	Shield Plate	1
11	312-063	Latch, Slide	2
12	398-006	Guide, PCB, 9" (Glue Type)	4
13	398-007	Guide, PCB, 8"	20
14	466-017	Lens, Reflective, Clear	2
15	613-016-01	Label, Serial #	1
16	650-005	Nut, Hex, Keps, 4-40	2
17	850-008	Screw, 4-40 x 3/8" Flat	1
18	850-039	Screw, 4-40 x 1/4" Flat, Phillips	24
19	957-003	Tape, Adhesive, 3M/4920	20