

SONY®

HD CAMERA CONTROL UNIT

HSCU300RF

HSCU300R

CCU CONTROL PANEL

HKCU-FP2

FACTORY SERVICE MANUAL

1st Edition

警告

このマニュアルは、サービス専用です。
お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。
危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

Model Name	Serial No.
HSCU300RF (SY): LEMO Optical Fiber Connector	10001 and Higher
HSCU300RF (SY): Tajimi Optical Fiber Connector	30001 and Higher
HSCU300R (UC): Kings Triax Connector	10001 and Higher
HSCU300R (J): Tajimi Triax Connector	30001 and Higher
HSCU300R (CED): Fischer Triax Connector	40001 and Higher
HSCU300R (CED): LEMO Triax Connector	60001 and Higher

目次

このマニュアルについて

本書の目的.....	3
関連マニュアル.....	3
商標について.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AU-358.....	2-1
CN-3661.....	2-3
CN-3662.....	2-4
CN-3663.....	2-6
CN-3664.....	2-6
CT-257D.....	2-7
DM-152.....	2-8
DPR-361.....	2-33
ENC-112.....	2-58
FL-378.....	2-60
FL-379.....	2-60
LED-525.....	2-61
PS-739D.....	2-62
SDP-19.....	2-66
SW-1615.....	2-71

3. Board Layouts

AU-358.....	3-1
CN-3661.....	3-1
CN-3662.....	3-2
CN-3663.....	3-2
CN-3664.....	3-2
CT-257D.....	3-3
DM-152.....	3-4
DPR-361 [SUFFIX -11].....	3-6
DPR-361 [SUFFIX -12].....	3-8
ENC-112.....	3-10
FL-378.....	3-10
FL-379.....	3-10
LED-525.....	3-10
PS-739D.....	3-11
SDP-19.....	3-13
SW-1615.....	3-14
Board Parts Location.....	3-15

このマニュアルについて

本書の目的

本書は、システム／サービスエンジニアの方々にご使用いただくことを想定し、本機の保守に関する情報、部品レベルまでのサービスを前提とした情報を記載しています。

関連マニュアル

この機種には以下のマニュアルが用意されています。
入手を希望される方は、ソニーの営業窓口にお問い合わせください。

- オペレーションマニュアル CD-ROM (本機に付属)
本機を実際に運用および操作するのに必要なマニュアルです。
- インストレーションマニュアル (別途用意)
本機の納入設置時に必要な情報を記載しています。
- サービスマニュアル (別途用意)
本機の保守に関する情報、ブロックレベルまでのサービスを前提とした情報を記載しています。

商標について

このマニュアルに記載されている商標および登録商標は下記のとおりです。

- FRAM は、米国ラムトロンインターナショナル社の登録商標です。

その他、記載されているシステム名、製品名は、一般に各開発メーカーの登録商標または商標です。

Table of Contents

Manual Structure

Purpose of this manual.....	3
Related manuals.....	3
Trademarks.....	3

1. Spare Parts

1-1. Note on Repair Parts.....	1-1
1-2. Electrical Parts List.....	1-2

2. Schematic Diagrams

AU-358.....	2-1
CN-3661.....	2-3
CN-3662.....	2-4
CN-3663.....	2-6
CN-3664.....	2-6
CT-257D.....	2-7
DM-152.....	2-8
DPR-361.....	2-33
ENC-112.....	2-58
FL-378.....	2-60
FL-379.....	2-60
LED-525.....	2-61
PS-739D.....	2-62
SDP-19.....	2-66
SW-1615.....	2-71

3. Board Layouts

AU-358.....	3-1
CN-3661.....	3-1
CN-3662.....	3-2
CN-3663.....	3-2
CN-3664.....	3-2
CT-257D.....	3-3
DM-152.....	3-4
DPR-361 [SUFFIX -11].....	3-6
DPR-361 [SUFFIX -12].....	3-8
ENC-112.....	3-10
FL-378.....	3-10
FL-379.....	3-10
LED-525.....	3-10
PS-739D.....	3-11
SDP-19.....	3-13
SW-1615.....	3-14
Board Parts Location.....	3-15

Manual Structure

Purpose of this manual

This manual describes the information items that premise the service based on the components parts assuming use of system and service engineers.

Related manuals

The following manuals are available in this model.

If this manual is required, please contact your local Sony Sales Office/Service Center.

- Operation Manual CD-ROM (Supplied with the unit)
This manual is necessary for application and operation of the unit.
- Installation Manual (Available on request)
This manual describes the information on installing this unit.
- Service Manual (Available on request)
This manual describes the information items that premise the service based on the block parts.

Trademarks

Trademarks and registered trademarks used in this manual are follows.

- FRAM is a registered trademark of Ramtron International Corporation.

Other system names and product names written in this manual are usually registered trademarks or trademarks of respective development manufacturers.

Section 1

Spare Parts

1-1. Note on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked △ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1. 安全重要部品

△警告

△印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。これは部品の共通化、改良等によるものです。

3. 部品の在庫

部品表の SP (Supply code) 欄に “o” で示される部品は在庫していないことがあり、納期が長くなる場合があります。

4. ハーネス

部品番号の記載されていないハーネスは、サービス部品として登録されていません。

1-2. Electrical Parts List

AU-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-724-A s	MOUNTED CIRCUIT BOARD, AU-358
C001	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C002	1-114-386-11 s	CAP, NIOBIUM ELECT 100MF 105
C003	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C004	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C005	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C006	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C007	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C008	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C009	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C010	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C011	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C041	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C042	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C043	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C044	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C081	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C082	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C083	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C084	1-165-585-21 s	CAP, CHIP ELECT 47MF
C085	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C086	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C114	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C118	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C119	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C120	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C121	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C141	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C142	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C143	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C144	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C145	1-117-142-21 s	CAP, ELECT 0.22MF
C146	1-117-142-21 s	CAP, ELECT 0.22MF
C147	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C148	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C150	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C151	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C152	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C153	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C154	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C155	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C156	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C157	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C158	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C159	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C160	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C163	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C164	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
CN001	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN002	1-816-113-21 s	CONNECTOR 15P
CN003	1-784-254-21 s	CONNECTOR 10P

D021	6-502-598-01 s	DI SML-D12U8WT86
D022	6-502-196-01 s	DI SML-D12Y8WT86SP
D023	6-502-197-01 s	DI SML-D12M8WT86SM

AU-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D024	6-502-197-01 s	DI SML-D12M8WT86SM
D025	6-502-598-01 s	DI SML-D12U8WT86
D026	6-502-196-01 s	DI SML-D12Y8WT86SP
D027	6-502-197-01 s	DI SML-D12M8WT86SM
D028	6-502-197-01 s	DI SML-D12M8WT86SM
D041	6-501-358-01 s	DIODE CL-197HG5-CD-T
D042	6-501-358-01 s	DIODE CL-197HG5-CD-T
D043	6-502-598-01 s	DI SML-D12U8WT86
D044	6-502-598-01 s	DI SML-D12U8WT86
D045	6-502-197-01 s	DI SML-D12M8WT86SM
D046	6-502-197-01 s	DI SML-D12M8WT86SM
D048	6-502-195-01 s	DI SML-D12D8WT86SQ
D081	6-502-598-01 s	DI SML-D12U8WT86
D082	6-502-598-01 s	DI SML-D12U8WT86
D083	6-502-598-01 s	DI SML-D12U8WT86
D084	6-501-358-01 s	DIODE CL-197HG5-CD-T
D085	6-501-358-01 s	DIODE CL-197HG5-CD-T
D086	6-501-358-01 s	DIODE CL-197HG5-CD-T
EN111	1-480-630-11 s	ENCODER, ROTARY
FB001	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB003	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB004	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB041	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB042	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB141	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
IC001	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC002	6-714-067-01 s	IC PCA9555DB-T
IC6	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC009	6-714-067-01 s	IC PCA9555DB-T
IC141	8-759-422-21 s	IC NJM4580V(TE2)
JC001	1-218-990-81 s	CONDUCTOR, CHIP (1005)
JC042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
JC043	1-218-990-81 s	CONDUCTOR, CHIP (1005)
L001	1-419-630-21 s	COIL, CHOKE 4.7UH
L002	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L081	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
Q001	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q021	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q022	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q023	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q024	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q025	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q026	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q027	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q028	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q041	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q042	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q043	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q044	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q045	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q047	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q048	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q081	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q082	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q141	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q142	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q143	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q144	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q145	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q146	8-729-929-09 s	TRANSISTOR DTC123JE-TL

AU-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q147	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q148	8-729-231-96 s	TRANSISTOR 2SK880GR-TE85L
Q149	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q150	8-729-929-09 s	TRANSISTOR DTC123JE-TL
R001	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R002	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R003	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R004	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R005	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R006	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R007	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R021	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R022	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R023	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R024	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R025	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R026	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R027	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R028	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R029	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R030	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R031	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R032	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R033	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R034	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R035	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R036	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R041	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R042	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R043	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R044	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R045	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R046	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R047	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R048	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R049	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R050	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R051	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R052	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R053	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R054	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R055	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R056	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R059	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R060	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R081	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R082	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R083	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R084	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R085	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R086	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R087	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R088	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R089	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R090	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R111	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R112	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R113	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R114	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R115	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R117	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R118	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R119	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R120	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)

AU-358 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R121	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R122	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R123	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R124	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R125	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R126	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R127	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R128	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R141	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R142	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R143	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R144	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R145	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R146	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R147	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R148	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R149	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R150	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R151	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R152	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R153	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R154	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R155	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R156	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R157	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R160	1-243-975-81 s	RES, CHIP 4.7M (1005)
R161	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R162	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R163	1-243-975-81 s	RES, CHIP 4.7M (1005)
R165	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R166	1-243-975-81 s	RES, CHIP 4.7M (1005)
R167	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R168	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R169	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R170	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R173	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R174	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
RV001	1-238-255-21 s	RES, VAR, CARBON 10K
S111	1-762-123-21 s	SWITCH, TOGGLE
S112	1-762-123-21 s	SWITCH, TOGGLE
S113	1-762-531-21 s	SWITCH, TOGGLE
S114	1-762-531-21 s	SWITCH, TOGGLE
TP001	1-535-877-22 s	CHIP, CHECKER

CN-3661 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-722-A s	MOUNTED CIRCUIT BOARD, CN-3661
C001	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C002	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C003	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C004	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C005	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C006	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
CN003	1-770-627-21 s	PIN, CONNECTOR 10P
CN004	1-816-669-13 s	CONNECTOR (RECEPTACLE), XLR
FB001	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB003	1-414-445-21 s	FERRITE, EMI (SMD) (1608)

CN-3661 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB004	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB007	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB010	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB011	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB014	1-414-445-21 s	FERRITE, EMI (SMD) (1608)

CN-3662 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-723-A s	MOUNTED CIRCUIT BOARD, CN-3662
C001	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C002	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C003	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C004	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C005	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C006	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C007	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C008	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C041	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C042	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C043	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C044	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C071	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C072	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C075	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C076	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C077	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C078	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C079	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C080	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C081	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C082	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C083	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C084	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C101	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C102	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C103	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C104	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C109	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C110	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C131	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C132	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C133	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C134	1-126-399-21 s	CAP, CHIP ELECT 10MF (5X5.7)
C135	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C136	1-114-419-21 s	CAP, CERAMIC 10MF B (2012)
C137	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C138	1-114-868-11 s	CAP, CERAMIC 0.1MF X7R 1608
C139	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C140	1-115-670-21 s	CAP, CHIP ELECT 220MF
C141	1-115-670-21 s	CAP, CHIP ELECT 220MF
CN001	1-794-822-12 s	CONNECTOR, COAXIAL (BNC TYPE)
CN002	1-794-822-12 s	CONNECTOR, COAXIAL (BNC TYPE)
CN003	1-794-822-12 s	CONNECTOR, COAXIAL (BNC TYPE)
CN004	1-794-822-12 s	CONNECTOR, COAXIAL (BNC TYPE)
CN005	1-794-822-12 s	CONNECTOR, COAXIAL (BNC TYPE)
CN006	1-794-822-12 s	CONNECTOR, COAXIAL (BNC TYPE)

CN-3662 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN007	1-750-890-11 s	CONNECTOR, D-SUB (ANGLE TYPE) 25P
CN011	1-778-535-31 s	CONNECTOR, FFC/FPC (ZIF) AN 45P
CN012	1-778-535-31 s	CONNECTOR, FFC/FPC (ZIF) AN 45P
CN013	1-784-254-21 s	CONNECTOR 10P
CN014	1-560-357-11 o	CONNECTOR POST HEADER, ILG (3P)
CN015	1-794-509-21 s	PIN, CONNECTOR (PC BOARD) (3P)
D071	8-719-024-71 s	DIODE 1SS362-TE85L
D072	8-719-024-71 s	DIODE 1SS362-TE85L
D101	8-719-046-86 s	DIODE F1J6TP
FB071	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB072	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB073	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB074	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
IC101	8-759-675-54 s	IC TC7W53FK (TE85R)
IC102	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC131	6-702-295-01 s	IC NJM78M12DL1A-TE1
IC132	6-704-600-01 s	IC M24C02-WMN6T (B)
JC101	1-218-990-81 s	CONDUCTOR, CHIP (1005)
JC102	1-218-990-81 s	CONDUCTOR, CHIP (1005)
L001	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L002	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L071	1-457-165-21 s	COMMON MODE CHOKE COIL
L072	1-457-165-21 s	COMMON MODE CHOKE COIL
L073	1-457-165-21 s	COMMON MODE CHOKE COIL
L074	1-457-165-21 s	COMMON MODE CHOKE COIL
L101	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L102	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L131	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L132	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L133	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L134	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
Q001	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q002	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q003	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q004	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q005	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q006	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q041	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q042	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q043	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q044	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q101	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q102	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q103	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q131	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q132	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
R001	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R003	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R005	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R006	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R007	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R008	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R009	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R010	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R011	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R012	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R013	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R014	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R015	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R016	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R017	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)

CN-3662 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R018	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R019	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R020	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R021	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R022	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R023	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R041	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R042	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R043	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R044	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R045	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R046	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R047	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R048	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R049	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R050	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R051	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R052	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R053	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R054	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R055	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R056	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R057	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R058	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R059	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R071	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R072	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R075	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R076	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R101	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R102	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R103	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R104	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R105	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R106	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R107	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R108	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R109	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R110	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R111	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R112	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R113	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R115	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R116	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R117	1-250-475-11 s	RES, METAL FILM CHIP 150(1005)
R131	1-218-965-81 s	RES, CHIP 10K (1005)
R132	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R133	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R134	1-218-965-81 s	RES, CHIP 10K (1005)
R135	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R136	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R137	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)

THP001  1-811-308-21 s THERMISTOR, POSITIVE**CN-3663 BOARD**

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-729-A s	MOUNTED CIRCUIT BOARD, CN-3663
1pc	3-637-901-02 s	SCREW M2.6X5
C001	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005

CN-3663 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C002	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
CN001	1-770-627-21 s	PIN, CONNECTOR 10P
CN002	1-766-696-11 o	CONNECTOR, ROUND TYPE 8P
CN003	1-561-336-41 s	CONNECTOR, COAXIAL
FB001	1-234-518-21 s	ARRAY, FERRITE CHIP
FB002	1-400-832-21 s	SMD EMI FERRITE
FB003	1-400-832-21 s	SMD EMI FERRITE
FB004	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB005	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB006	1-469-094-21 s	FERRITE, EMI (SMD) (1608)

CN-3664 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-725-A s	MOUNTED CIRCUIT BOARD, CN-3664
C1	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C2	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
CN1	1-817-940-11 s	CONNECTOR, ROUND TYPE 5P
CN002	1-770-627-21 s	PIN, CONNECTOR 10P
FB1	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21 s	FERRITE, EMI (SMD) (1608)
L1	1-457-165-21 s	COMMON MODE CHOKE COIL

CT-257D BOARD

Ref. No. or Q'ty	Part No.	SP Description
C5001	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5002	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5003	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5004	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5005	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5006	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5007	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5008	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5009	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5010	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5016	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5018	1-112-317-11 s	CAP, CHIP CERAMIC 0.1MF (2012)
C5019	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5020	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C5025	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5026	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5027	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5028	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C5029	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5030	1-112-791-11 s	CAP, ELECT 100MF
C5034	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5035	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5040	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5041	1-112-795-11 s	CAP, ELECT 22MF
C5042	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5043	1-112-317-11 s	CAP, CHIP CERAMIC 0.1MF (2012)
C5044	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C5046	1-112-795-11 s	CAP, ELECT 22MF

CT-257D BOARD

Ref. No. or Q'ty	Part No.	SP Description
C5047	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5048	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5049	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5050	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5051	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C5052	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C5053	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
CN5001	1-770-627-21 s	PIN, CONNECTOR 10P
CN5002	1-580-554-11 s	CONNECTOR, BOARD TO BOARD 16P
CN5003	1-695-948-11 o	CONNECTOR, BOARD TO BOARD 10P
CN5004	1-695-948-11 o	CONNECTOR, BOARD TO BOARD 10P
CN5005	1-695-948-11 o	CONNECTOR, BOARD TO BOARD 10P
CN5006	1-774-863-21 s	PIN, CONNECTOR (PC BOARD) 8P
CN5007	1-774-730-21 s	PIN, CONNECTOR (PC BOARD) 3P
D5005	8-719-083-57 s	DI UDZSUSTE-173.6B
D5006	8-719-069-28 s	DI 1SS400FJTE61
D5014	6-501-658-01 s	DIODE D1FK60
D5020	8-719-055-30 s	DIODE D1FS4A-TA
D5021	8-719-083-57 s	DI UDZSUSTE-173.6B
E5001	1-535-757-21 s	CHIP, CHECKER
FB5003	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5004	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5005	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5006	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5007	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5008	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5009	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB5010	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FL5001	1-234-979-21 s	FILTER, EMI REMOVAL (SMD)
IC5001	6-702-879-01 s	IC R3112N281A-TR-FE
IC5002	6-711-725-01 s	IC EPM240T100C5NRR
IC5003	8-759-656-54 s	IC TC7WH14FK
IC5004	8-759-598-44 s	IC TC7WH08FK
IC5005	6-704-643-01 s	IC R3112N221A-TR-FE
IC5010	6-705-468-01 s	IC BA33BC0FP-E2
IC5012	8-759-681-48 s	IC NJM317DL1
IC5013	8-759-681-48 s	IC NJM317DL1
IC5014	8-759-681-48 s	IC NJM317DL1
L5006	1-457-302-21 s	COMMON MODE CHOKE COIL
L5007	1-457-302-21 s	COMMON MODE CHOKE COIL
L5008	1-457-302-21 s	COMMON MODE CHOKE COIL
L5009	1-457-302-21 s	COMMON MODE CHOKE COIL
Q5001	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5002	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q5003	8-729-928-82 s	TRANSISTOR DTC144EE-TL
R5001	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5002	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5003	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5004	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5005	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5006	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5007	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5015	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R5017	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5018	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5019	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R5020	1-220-222-91 s	RES,SQUARE TYPE CHIP 4.7K 4532
R5025	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R5042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5054	1-216-864-91 s	CONDUCTOR, CHIP (1608)
R5055	1-218-831-91 s	RES, CHIP 220 (1608)
R5056	1-218-847-91 s	RES, CHIP 1.0K (1608)

CT-257D BOARD

Ref. No. or Q'ty	Part No.	SP Description
R5057	1-218-843-91 s	RES, CHIP 680 (1608)
R5058	1-218-831-91 s	RES, CHIP 220 (1608)
R5060	1-218-831-91 s	RES, CHIP 220 (1608)
R5061	1-218-847-91 s	RES, CHIP 1.0K (1608)
R5062	1-218-847-91 s	RES, CHIP 1.0K (1608)
R5063	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R5065	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R5066	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R5067	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R5068	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
TP5001	1-535-757-21 s	CHIP, CHECKER

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1973-539-A s	MOUNTED CIRCUIT BOARD, DM-152
2pcs	2-640-315-02 o	SCREW (M2X5), SMALL, +P, SW
C001	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C002	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C003	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C004	1-118-399-11 s	CAP, CERAMIC 2200PF X7R 1005
C005	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C006	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C007	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C008	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C009	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C010	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C011	1-117-949-81 s	CAP, CHIP CERAMIC 820PF B1005
C012	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C013	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C014	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C015	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C016	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C017	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C018	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C020	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C021	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C022	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C024	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C025	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C027	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C028	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C030	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C031	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C032	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C034	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C035	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C037	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C038	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C039	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C040	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C042	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C043	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C045	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C046	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C048	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C049	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C051	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C052	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C056	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C057	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C058	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C060	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C063	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C064	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C066	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
C067	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C068	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C069	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C070	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
C071	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C072	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C073	1-118-389-11 s	CAP, CERAMIC 0.022MF X7R 1005
C074	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C075	1-118-036-11 s	CAP, CERAMIC 0.1MF X5R (1608)
C076	1-114-236-21 s	CAP, CERAMIC 22MF B (3225)
C077	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C078	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C079	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C080	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C081	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C082	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C083	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C084	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C085	1-116-118-11 s	CAP, ELECT 47MF 105
C086	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C087	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C088	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C089	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C090	1-100-671-91 s	CAP, CERAMIC 4.7MF C (3216)
C091	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C092	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C093	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C094	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C095	1-118-044-11 s	CAP, CERAMIC 1MF X5R (2012)
C096	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C097	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C098	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C099	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C100	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C101	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C102	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C103	1-116-118-11 s	CAP, ELECT 47MF 105
C104	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C105	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C106	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C107	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C110	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C111	1-126-402-21 s	CAP, CHIP ELECT 2.2MF (4X5.7)
C112	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C113	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C114	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C115	1-116-705-11 s	CAP, CERAMIC 47MF X5R 3225
C116	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C117	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C119	1-100-671-91 s	CAP, CERAMIC 4.7MF C (3216)
C120	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C121	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C122	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C123	1-100-671-91 s	CAP, CERAMIC 4.7MF C (3216)
C124	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C125	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C201	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C202	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C204	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C205	1-164-933-81 s	CAP, CHIP CERAMIC 220PF B 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C207	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C208	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C209	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C210	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C214	1-162-919-91 s	CAP, CERAMIC 22PF CH 1608
C215	1-162-919-91 s	CAP, CERAMIC 22PF CH 1608
C216	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C217	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C218	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C219	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C220	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C221	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C222	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C223	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C224	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C225	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C226	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C227	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C228	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C229	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C230	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C231	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C232	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C233	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C234	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C235	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C236	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C237	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C238	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C239	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C240	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C242	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C244	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C245	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C246	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C247	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C248	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C249	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C250	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C252	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C254	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C255	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C256	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C257	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C259	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C261	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C262	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C263	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C264	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C265	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C266	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C267	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C268	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C269	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C270	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C271	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C272	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C273	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C274	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C275	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C276	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C277	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C278	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C279	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C280	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

Ref. No. or Q'ty	Part No.	SP	Description
C635	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C636	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C637	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C638	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C639	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C640	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C641	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C642	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C643	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C644	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C645	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C646	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C647	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C648	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C649	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C650	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C651	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C652	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C654	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C655	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C656	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C657	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C658	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C659	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C660	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C661	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C663	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C664	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C669	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C670	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C671	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C672	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C673	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C674	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C675	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C676	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C677	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C678	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C679	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C680	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C681	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C682	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C683	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C684	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C685	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C686	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C687	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C688	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C689	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C690	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C701	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C702	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C703	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C801	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C802	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C803	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C804	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C805	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C806	1-116-720-11	o	CAP, CERAMIC 10MF X5R 1608
C807	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C808	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C809	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C810	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C811	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005
C812	1-118-386-11	s	CAP, CERAMIC 0.1MF X7R 1005

[illegible]

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1009	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1010	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1011	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1012	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1013	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1014	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1015	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1016	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1017	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1018	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1019	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1020	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1021	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1022	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1023	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1024	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1025	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1026	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1027	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1029	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1030	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1031	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1032	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1033	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1034	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1035	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1036	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1037	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1038	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C1039	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1040	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1041	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1042	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1043	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1044	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1045	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1046	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1047	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1048	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1100	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1101	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1102	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1103	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1104	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1105	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1106	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1107	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1108	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1109	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1110	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1111	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1200	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C1201	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1202	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1203	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C1205	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1207	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C1208	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1209	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1210	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1211	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1212	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1213	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1214	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1215	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1216	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1217	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1218	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1219	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1220	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1221	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1222	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1223	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1224	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1225	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1226	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1227	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1228	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1229	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C1230	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C1231	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C1232	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1233	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C1234	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1235	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1236	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C1239	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1240	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1245	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1247	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1249	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C1250	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1251	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1252	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1255	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1256	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C1258	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1259	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1260	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1261	1-164-878-81 s	CAP,CHIP CERAMIC 150PF CH 1005
C1263	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1264	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C1265	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1266	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1267	1-164-852-81 s	CAP, CHIP CERAMIC 12PF CH 1005
C1268	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1269	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1500	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1501	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1502	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C1503	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1504	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1505	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1506	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1507	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1508	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1509	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1510	1-164-940-81 s	CAP,CHIP CERAMIC 3300PF B 1005
C1511	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1512	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1513	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1514	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1515	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1516	1-164-849-81 s	CAP, CHIP CERAMIC 9PF CH 1005
C1517	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C1518	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1519	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1520	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1521	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1522	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1523	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C1533	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1534	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1535	1-164-870-81 s	CAP, CHIP CERAMIC 68PF CH 1005
C1536	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1537	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1538	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C1539	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1540	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1541	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C1542	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1543	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1544	1-112-916-11 s	CAP, NIOBIUM ELECT 47MF 105
C1545	1-164-940-81 s	CAP,CHIP CERAMIC 3300PF B 1005
C1546	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1547	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1548	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1549	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1550	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1551	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1552	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1553	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C1562	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1563	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1564	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1565	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C1568	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1569	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1570	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1571	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1578	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1579	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1580	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1581	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1582	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1583	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1584	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1585	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1586	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1587	1-116-173-91 s	CAP,CHIP CERAMIC 2200PF CH1608
C1588	1-116-173-91 s	CAP,CHIP CERAMIC 2200PF CH1608
C1589	1-114-386-11 s	CAP, NIOBIUM ELECT 100MF 105
C1590	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1591	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1592	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C1593	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1594	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1595	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1597	1-114-813-11 s	CAP, CERAMIC 1UF X7R 1608
C1598	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1599	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1601	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1602	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1603	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1604	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1605	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1606	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1607	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1608	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1609	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1610	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1611	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1612	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1613	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1614	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1615	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1616	1-116-711-11 s	CAP, CERAMIC 22MF X5R 3216
C1617	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1618	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1619	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1620	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1621	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1622	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1623	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1624	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1625	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1627	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1628	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1629	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1630	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1631	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1632	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1633	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1634	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1635	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1636	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1637	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1638	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1639	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1640	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1641	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1642	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1643	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1644	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1645	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1646	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1647	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C1648	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1649	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1701	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1702	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1703	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1704	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1705	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1706	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1707	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1708	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1709	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1710	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1711	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1712	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1713	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1714	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1715	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1716	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1717	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1718	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1719	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1720	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1721	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1722	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1723	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1724	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1725	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1726	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1727	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1728	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1729	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1730	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C1731	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3464	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3465	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3466	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3467	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3468	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3469	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C3470	1-164-854-81 s	CAP, CHIP CERAMIC 15PF CH 1005
C3471	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3472	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3478	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3479	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3489	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3490	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3491	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3501	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3502	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3503	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C3504	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3505	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C3506	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3507	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3508	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3509	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C3510	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C3511	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3512	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3513	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3514	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3515	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3517	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3519	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3520	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3521	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3522	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3524	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C3526	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3527	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3528	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3529	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3530	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3531	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3532	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3533	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3534	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3535	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3536	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3537	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C3538	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C3539	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C3540	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3541	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3543	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3544	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3545	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3546	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3547	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3548	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3549	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3550	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3551	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3552	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3553	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3554	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3555	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3556	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3557	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3558	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3559	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3560	1-125-891-91 s	CAP, CHIP CERAMIC0.47MF B 1608
C3561	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3562	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3563	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3564	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3565	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3566	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3567	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3568	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3569	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3577	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3578	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3579	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3589	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3590	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3601	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3602	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3603	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3604	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C3605	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C3606	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3607	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3608	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3609	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3610	1-164-842-81 s	CAP,CHIP CERAMIC 2.0PF CK 1005
C3611	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3612	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3613	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3614	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C3615	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C3616	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3617	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3618	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3619	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3620	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3622	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3624	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3625	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3626	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3627	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3629	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C3631	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3632	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3633	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3634	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3635	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3636	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3637	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3638	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3639	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C3640	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3641	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3642	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C3643	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C3645	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3646	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3648	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3649	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3650	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3651	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3652	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3653	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3654	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3655	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3656	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3658	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3659	1-164-936-81 s	CAP, CHIP CERAMIC 680PF B 1005
C3660	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3661	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3662	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3663	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3664	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3665	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3666	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3667	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3668	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3669	1-125-891-91 s	CAP, CHIP CERAMIC0.47MF B 1608
C3670	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3671	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3672	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3673	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3674	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3675	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3676	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3677	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3678	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3679	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3680	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3681	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3683	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C3684	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3685	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3686	1-118-395-11 s	CAP, CERAMIC 4700PF X7R 1005
C3687	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C3688	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3689	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3690	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3701	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3702	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3703	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C3704	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3705	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C3706	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3707	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3708	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3709	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3710	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3711	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3712	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3713	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3714	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3715	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3717	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3719	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3720	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3721	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3722	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3726	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3727	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3728	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3729	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3730	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3731	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3732	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3733	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3734	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C3735	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3736	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3737	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C3738	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C3739	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C3740	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3741	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3743	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3744	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3745	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3746	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3747	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3748	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3749	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3750	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3751	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3752	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3753	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3754	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3755	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3756	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3757	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3758	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3759	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3760	1-125-891-91 s	CAP, CHIP CERAMIC0.47MF B 1608
C3761	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3762	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3763	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3764	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3765	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3766	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3767	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3769	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3770	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3778	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3779	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3782	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3784	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3788	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3801	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3802	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3803	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C3804	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3805	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C3806	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3807	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3808	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3809	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3810	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3811	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3812	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3813	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3814	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3815	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3817	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3819	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3820	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3821	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3822	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3826	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3827	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3828	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3829	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3830	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3831	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3832	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3833	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3834	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C3835	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3836	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3837	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C3838	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C3840	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3841	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3843	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3844	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3845	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3846	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3847	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3848	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3849	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3850	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3851	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3852	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3853	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3854	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3855	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3856	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3857	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3858	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3859	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3860	1-125-891-91 s	CAP, CHIP CERAMIC0.47MF B 1608
C3861	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3862	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3863	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3864	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3865	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3866	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3867	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3869	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3870	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3871	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3872	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3873	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3874	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3878	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3882	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3884	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3888	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3901	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3902	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3903	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3904	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3905	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3906	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C3907	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3908	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3909	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3910	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3911	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3912	1-112-021-91 s	CAP, CERAMIC 2.2MF C (1608)
C3913	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3914	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C3915	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3916	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3917	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3918	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3919	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3920	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3921	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3922	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C3923	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3924	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C3926	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3928	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3929	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3930	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3931	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3935	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3936	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3937	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3938	1-164-856-81 s	CAP, CHIP CERAMIC 18PF CH 1005
C3939	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3940	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3941	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3942	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3943	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C3944	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3945	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3946	1-164-846-81 s	CAP, CHIP CERAMIC 6PF CH 1005
C3947	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C3948	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C3949	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C3950	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3952	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3953	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3954	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3955	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3956	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3957	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3958	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3959	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3960	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3961	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3962	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3963	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3964	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3965	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3966	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3967	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3968	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3969	1-125-891-91 s	CAP, CHIP CERAMIC0.47MF B 1608
C3970	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3971	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3972	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3973	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3974	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3975	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3976	1-118-386-11 s	CAP, CERAMIC 0.1MF X7R 1005
C3978	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C3982	1-118-391-11 s	CAP, CERAMIC 0.01MF X7R 1005
C3983	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C3984	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C3985	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3986	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C3988	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
CN101	1-774-731-21 s	PIN, CONNECTOR (PC BOARD) 5P
CN201	1-843-236-11 s	HEADER ASSEMBLY FOR PWB ST 41P
CN202	1-778-534-31 s	CONNECTOR, FFC/FPC(21F) ST 45P
CN203	1-778-534-31 s	CONNECTOR, FFC/FPC(21F) ST 45P
CN1701	1-784-254-21 s	CONNECTOR 10P
CN1901	1-770-620-21 s	PIN, CONNECTOR 3P
CN3901	1-750-880-11 s	RECEPTACLE, COAXIAL CONNECTOR
D101	6-501-123-01 s	DIODE RB160M-60TR
D103	6-501-123-01 s	DIODE RB160M-60TR

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
D104	8-719-083-60 s	DI UDZSUSTE-174.7B
D105	8-719-083-60 s	DI UDZSUSTE-174.7B
D106	6-502-197-01 s	DI SML-D12M8WT86SM
D201	8-719-083-90 s	DIODE HVU363ATRU
D202	8-719-989-04 s	DIODE DAN222-TL
D203	8-719-989-01 s	DIODE DA221-TL
D1503	8-719-989-01 s	DIODE DA221-TL
D1505	8-719-989-01 s	DIODE DA221-TL
D1508	8-719-069-99 s	DIODE 1SS375-TL-E
D1509	8-719-069-99 s	DIODE 1SS375-TL-E
D1510	6-503-971-01 s	DI 1SV325
D1602	8-719-989-04 s	DIODE DAN222-TL
D1701	6-501-436-01 s	DIODE SML412BC6TT86
D3401	8-719-083-90 s	DIODE HVU363ATRU
D3501	8-719-083-90 s	DIODE HVU363ATRU
D3601	8-719-069-28 s	DI 1SS400FJTE61
D3602	8-719-069-28 s	DI 1SS400FJTE61
D3603	8-719-083-90 s	DIODE HVU363ATRU
D3701	8-719-083-90 s	DIODE HVU363ATRU
D3801	8-719-083-90 s	DIODE HVU363ATRU
D3902	8-719-083-90 s	DIODE HVU363ATRU
D3904	8-719-075-48 s	DIODE 1SS390-TE61
D3905	8-719-075-48 s	DIODE 1SS390-TE61
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E3	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER
E5	1-535-877-22 s	CHIP, CHECKER
E6	1-535-877-22 s	CHIP, CHECKER
E7	1-535-877-22 s	CHIP, CHECKER
E8	1-535-877-22 s	CHIP, CHECKER
E9	1-535-877-22 s	CHIP, CHECKER
E10	1-535-877-22 s	CHIP, CHECKER
E14	1-535-877-22 s	CHIP, CHECKER
E201	1-535-877-22 s	CHIP, CHECKER
E1501	1-535-877-22 s	CHIP, CHECKER
ET101	1-780-925-11 s	TERMINAL, LUG
ET102	1-780-925-11 s	TERMINAL, LUG
ET103	1-780-925-11 s	TERMINAL, LUG
ET104	1-780-925-11 s	TERMINAL, LUG
ET105	1-780-925-11 s	TERMINAL, LUG
FB101	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB103	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB104	1-400-580-21 s	FERRITE, EMI (SMD)
FB105	1-400-580-21 s	FERRITE, EMI (SMD)
FB107	1-400-580-21 s	FERRITE, EMI (SMD)
FB108	1-400-580-21 s	FERRITE, EMI (SMD)
FB109	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB110	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB115	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB116	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB117	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB118	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB119	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB120	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB121	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB122	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB123	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB124	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB125	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB126	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB129	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB130	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB131	1-400-580-21 s	FERRITE, EMI (SMD)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB132	1-400-580-21 s	FERRITE, EMI (SMD)
FB133	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB134	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB135	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB141	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB142	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB143	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB144	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB145	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB401	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB404	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB502	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB503	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB504	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB505	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB506	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB507	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB508	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB509	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB601	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB602	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB603	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB604	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB605	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB606	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB607	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB608	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB609	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB610	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB611	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB612	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB613	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB614	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB615	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB701	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB702	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB703	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB801	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB802	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB803	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB804	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB901	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB902	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB903	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB904	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB905	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB906	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB907	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB908	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB909	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1102	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1103	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1601	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1602	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1603	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1701	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1702	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1703	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1704	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1705	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB1706	1-414-864-21 s	FERRITE, EMI (SMD) (1608)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
FB3402	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3403	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3404	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3406	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3407	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3408	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3409	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3502	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3503	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3504	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3506	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3507	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3602	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3603	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3604	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3606	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3607	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3608	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3609	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3702	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3703	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3704	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3706	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3707	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3708	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3709	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3802	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3803	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3804	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3806	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3807	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3808	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3809	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3902	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3903	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3904	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB3906	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FB3907	1-216-864-91 s	CONDUCTOR, CHIP (1608)
FL201	1-200-086-12 s	FILTER, BAND PASS (82-110MHZ)
FL202	1-200-081-11 s	FILTER, BAND PASS (96MHZ)
FL1501	1-200-078-11 s	FILTER, BAND PASS (1.0MHZ)
FL1502	1-200-079-11 s	FILTER, BAND PASS (1.4MHZ)
FL3401	1-200-087-11 s	FILTER, BAND PASS (6MHZ)
FL3501	1-200-088-11 s	FILTER, BAND PASS (16MHZ)
FL3601	1-200-089-11 s	FILTER, BAND PASS (26MHZ)
FL3701	1-200-083-11 s	FILTER, BAND PASS (46MHZ)
FL3801	1-200-084-11 s	FILTER, BAND PASS (56MHZ)
FL3901	1-200-090-11 s	FILTER, MULTIPLEX
FL3902	1-200-085-11 s	FILTER, BAND PASS (66MHZ)
IC101	6-712-135-01 o	IC R1173H001D-T1-FE
IC102	6-712-135-01 o	IC R1173H001D-T1-FE
IC103	6-712-135-01 o	IC R1173H001D-T1-FE
IC104	6-713-169-01 s	IC LTC3412AEFE#TR
IC105	6-713-169-01 s	IC LTC3412AEFE#TR
IC106	8-759-278-58 s	IC NJM4558V-TE2
IC107	6-712-135-01 o	IC R1173H001D-T1-FE
IC108	6-702-879-01 s	IC R3112N281A-TR-FE
IC110	6-716-575-01 s	IC TPS54331GDR
IC111	6-714-911-01 s	IC TPS54325PWPR
IC112	6-700-655-01 s	IC LT1963ES8#TR
IC113	6-705-481-01 s	IC LT1931ES5#TR
IC114	6-712-135-01 o	IC R1173H001D-T1-FE
IC115	6-704-976-01 s	IC ADR381ARTZ-REEL7

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC117	8-759-338-95 s	IC NJM2903V (TE2)
IC118	8-759-338-95 s	IC NJM2903V (TE2)
IC201	8-753-321-14 s	IC CXA3792Q-T4
IC202	8-753-321-15 s	IC CXA3793R-T4
IC203	6-712-077-01 s	IC LMH6550MAX
IC204	6-712-077-01 s	IC LMH6550MAX
IC205	8-753-321-14 s	IC CXA3792Q-T4
IC206	8-753-321-15 s	IC CXA3793R-T4
IC207	6-712-077-01 s	IC LMH6550MAX
IC208	6-712-077-01 s	IC LMH6550MAX
IC209	6-706-482-01 s	IC TC7SH00FU
IC210	6-706-482-01 s	IC TC7SH00FU
IC211	6-706-487-01 s	IC TC7SH08FU
IC212	6-706-489-01 s	IC TC7SH32FU
IC213	6-706-482-01 s	IC TC7SH00FU
IC215	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC216	8-759-346-27 s	IC LM45BIM3X
IC217	6-712-383-01 s	IC TC74VHC4051AFT(EK)
IC301	6-708-277-01 s	IC CDCVF25081PWR
IC302	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC304	6-702-879-01 s	IC R3112N281A-TR-FE
IC305	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC402	6-712-135-01 o	IC R1173H001D-T1-FE
IC403	6-712-135-01 o	IC R1173H001D-T1-FE
IC404	6-706-487-01 s	IC TC7SH08FU
IC603	6-708-637-01 s	IC NJM2871BF33-TE2
IC606	6-713-512-02 s	IC AD9744ACPZ
IC607	6-713-512-02 s	IC AD9744ACPZ
IC608	6-712-135-01 o	IC R1173H001D-T1-FE
IC802	6-712-135-01 o	IC R1173H001D-T1-FE
IC803	6-712-135-01 o	IC R1173H001D-T1-FE
IC804	6-706-487-01 s	IC TC7SH08FU
IC1001	6-718-382-01 s	IC ML86V76653TBZ0AAL
IC1002	6-718-382-01 s	IC ML86V76653TBZ0AAL
IC1003	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC1004	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC1501	6-706-863-01 s	IC LMH6732MFX/NOPB
IC1503	8-759-278-58 s	IC NJM4558V-TE2
IC1504	8-759-083-42 s	IC TC4W53FU (TE12R)
IC1506	8-759-278-58 s	IC NJM4558V-TE2
IC1507	6-706-487-01 s	IC TC7SH08FU
IC1510	8-759-278-58 s	IC NJM4558V-TE2
IC1511	6-713-784-01 s	IC NJM567M (TE2)
IC1512	8-759-144-73 s	IC UPC393G2-E2
IC1513	6-706-487-01 s	IC TC7SH08FU
IC1514	8-759-422-21 s	IC NJM4580V (TE2)
IC1515	6-706-487-01 s	IC TC7SH08FU
IC1516	6-718-491-01 s	IC NJM2549RB2 (TE2)
IC1601	8-759-337-40 s	IC NJM2904V (TE2)
IC1602	8-759-337-40 s	IC NJM2904V (TE2)
IC1603	8-759-337-40 s	IC NJM2904V (TE2)
IC1604	8-759-337-40 s	IC NJM2904V (TE2)
IC1605	8-759-337-40 s	IC NJM2904V (TE2)
IC1606	8-759-337-40 s	IC NJM2904V (TE2)
IC1607	8-759-337-40 s	IC NJM2904V (TE2)
IC1608	8-759-672-76 s	IC AK9813BF-E2
IC1609	6-706-487-01 s	IC TC7SH08FU
IC1611	8-759-337-40 s	IC NJM2904V (TE2)
IC1612	8-759-337-40 s	IC NJM2904V (TE2)
IC1613	8-759-337-40 s	IC NJM2904V (TE2)
IC1614	6-712-383-01 s	IC TC74VHC4051AFT(EK)
IC1615	8-759-337-40 s	IC NJM2904V (TE2)
IC1616	8-759-278-58 s	IC NJM4558V-TE2
IC1617	8-759-278-58 s	IC NJM4558V-TE2
IC1618	6-710-944-01 s	IC TC74VHC573FK (EL, K)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC1702	6-706-487-01 s	IC TC7SH08FU
IC1704	6-706-487-01 s	IC TC7SH08FU
IC1705	8-759-831-52 s	IC TC7WH125FK
IC1706	8-759-831-52 s	IC TC7WH125FK
IC1707	8-759-831-52 s	IC TC7WH125FK
IC1708	6-706-484-01 s	IC TC7SH04FU
IC1709	8-759-831-52 s	IC TC7WH125FK
IC1710	8-759-831-52 s	IC TC7WH125FK
IC1901	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC2201	6-704-600-01 s	IC M24C02-WMN6T (B)
IC3401	8-753-321-15 s	IC CXA3793R-T4
IC3402	8-753-321-14 s	IC CXA3792Q-T4
IC3403	8-753-321-15 s	IC CXA3793R-T4
IC3404	8-753-276-53 s	IC CXD1968AR-T6
IC3405	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC3501	8-753-321-15 s	IC CXA3793R-T4
IC3502	8-753-321-14 s	IC CXA3792Q-T4
IC3504	8-753-276-53 s	IC CXD1968AR-T6
IC3505	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC3601	8-753-321-15 s	IC CXA3793R-T4
IC3602	8-753-321-14 s	IC CXA3792Q-T4
IC3604	8-753-276-53 s	IC CXD1968AR-T6
IC3605	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC3606	6-713-951-01 s	IC LMH6624MFX
IC3701	8-753-321-15 s	IC CXA3793R-T4
IC3702	8-753-321-14 s	IC CXA3792Q-T4
IC3704	8-753-276-53 s	IC CXD1968AR-T6
IC3705	6-713-951-01 s	IC LMH6624MFX
IC3801	8-753-321-15 s	IC CXA3793R-T4
IC3802	8-753-321-14 s	IC CXA3792Q-T4
IC3804	8-753-276-53 s	IC CXD1968AR-T6
IC3805	6-713-951-01 s	IC LMH6624MFX
IC3806	6-706-863-01 s	IC LMH6732MFX/NOPB
IC3901	8-753-321-15 s	IC CXA3793R-T4
IC3902	8-753-321-14 s	IC CXA3792Q-T4
IC3904	8-753-276-53 s	IC CXD1968AR-T6
IC3905	6-713-951-01 s	IC LMH6624MFX
IC3906	6-713-951-01 s	IC LMH6624MFX
IC3907	8-759-675-54 s	IC TC7W53FK (TE85R)
JC101	1-218-990-81 s	CONDUCTOR, CHIP (1005)
L102	1-457-372-21 s	COIL, CHOKE 1UH
L103	1-457-372-21 s	COIL, CHOKE 1UH
L104	1-400-135-21 s	INDUCTOR 1UH (2012)
L105	1-457-455-11 s	CHOKE COIL 10UH
L106	1-457-892-11 s	CHOKE COIL
L107	1-457-455-11 s	CHOKE COIL 10UH
L108	1-457-455-11 s	CHOKE COIL 10UH
L109	1-457-455-11 s	CHOKE COIL 10UH
L204	1-456-901-11 s	INDUCTOR 82NH
L205	1-481-612-11 s	INDUCTOR 120NH
L206	1-481-612-11 s	INDUCTOR 120NH
L209	1-481-612-11 s	INDUCTOR 120NH
L210	1-481-612-11 s	INDUCTOR 120NH
L213	1-469-549-21 s	INDUCTOR, CHIP 1.0UH (LB2016)
L214	1-412-975-41 s	INDUCTOR, SMALL TYPE 0.47UH
L301	1-481-175-21 s	INDUCTOR 4.7UH
L302	1-481-035-11 s	INDUCTOR (10UH)
L401	1-400-135-21 s	INDUCTOR 1UH (2012)
L402	1-400-135-21 s	INDUCTOR 1UH (2012)
L403	1-400-135-21 s	INDUCTOR 1UH (2012)
L601	1-481-035-11 s	INDUCTOR (10UH)
L602	1-414-840-21 s	INDUCTOR, CHIP 10NH (1005)
L603	1-481-035-11 s	INDUCTOR (10UH)
L701	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L801	1-400-135-21 s	INDUCTOR 1UH (2012)
L802	1-400-135-21 s	INDUCTOR 1UH (2012)
L803	1-400-135-21 s	INDUCTOR 1UH (2012)
L1001	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1002	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1003	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1004	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1005	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1006	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1007	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1008	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1009	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1010	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L1200	1-414-524-41 s	INDUCTOR, SMALL TYPE 33.0UH
L1201	1-414-524-41 s	INDUCTOR, SMALL TYPE 33.0UH
L1502	1-481-781-21 s	INDUCTOR 47UH
L1504	1-481-781-21 s	INDUCTOR 47UH
L1509	1-481-781-21 s	INDUCTOR 47UH
L3401	1-481-074-21 s	INDUCTOR 2.2UH
L3402	1-481-074-21 s	INDUCTOR 2.2UH
L3403	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3404	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3405	1-481-608-11 s	INDUCTOR 330NH
L3406	1-481-608-11 s	INDUCTOR 330NH
L3407	1-481-074-21 s	INDUCTOR 2.2UH
L3408	1-456-906-11 s	INDUCTOR 820NH
L3409	1-481-074-21 s	INDUCTOR 2.2UH
L3501	1-481-074-21 s	INDUCTOR 2.2UH
L3502	1-481-074-21 s	INDUCTOR 2.2UH
L3503	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3504	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3505	1-456-902-11 s	INDUCTOR 220NH
L3507	1-481-074-21 s	INDUCTOR 2.2UH
L3508	1-456-906-11 s	INDUCTOR 820NH
L3509	1-481-074-21 s	INDUCTOR 2.2UH
L3510	1-481-074-21 s	INDUCTOR 2.2UH
L3601	1-481-074-21 s	INDUCTOR 2.2UH
L3602	1-481-074-21 s	INDUCTOR 2.2UH
L3603	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3604	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3605	1-481-608-11 s	INDUCTOR 330NH
L3606	1-400-657-21 s	INDUCTOR, CHIP 15UH (2520)
L3607	1-481-074-21 s	INDUCTOR 2.2UH
L3608	1-456-906-11 s	INDUCTOR 820NH
L3609	1-481-074-21 s	INDUCTOR 2.2UH
L3610	1-481-074-21 s	INDUCTOR 2.2UH
L3611	1-400-197-21 s	INDUCTOR, CHIP 12UH (2520)
L3701	1-481-074-21 s	INDUCTOR 2.2UH
L3702	1-481-074-21 s	INDUCTOR 2.2UH
L3703	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3704	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3706	1-456-906-11 s	INDUCTOR 820NH
L3707	1-481-074-21 s	INDUCTOR 2.2UH
L3708	1-481-074-21 s	INDUCTOR 2.2UH
L3709	1-481-074-21 s	INDUCTOR 2.2UH
L3801	1-481-074-21 s	INDUCTOR 2.2UH
L3802	1-481-074-21 s	INDUCTOR 2.2UH
L3803	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3804	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3805	1-481-611-11 s	INDUCTOR 150NH
L3806	1-456-906-11 s	INDUCTOR 820NH
L3807	1-481-074-21 s	INDUCTOR 2.2UH
L3808	1-481-074-21 s	INDUCTOR 2.2UH
L3809	1-481-074-21 s	INDUCTOR 2.2UH
L3901	1-481-074-21 s	INDUCTOR 2.2UH

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L3902	1-481-074-21 s	INDUCTOR 2.2UH
L3903	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3904	1-481-577-21 s	INDUCTOR, CHIP 1.0UH
L3905	1-481-610-11 s	INDUCTOR 110NH
L3906	1-456-906-11 s	INDUCTOR 820NH
L3907	1-481-074-21 s	INDUCTOR 2.2UH
L3908	1-481-074-21 s	INDUCTOR 2.2UH
L3909	1-481-074-21 s	INDUCTOR 2.2UH
LV1501	1-460-651-11 s	COIL, VARIABLE (150UH)
LV1502	1-460-651-11 s	COIL, VARIABLE (150UH)
Q104	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q105	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q106	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q202	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q203	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q204	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q205	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q206	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q207	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q208	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q209	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q210	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q211	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q212	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q213	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q214	8-729-111-97 s	TRANSISTOR 2SC3356-T1K
Q215	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q216	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q217	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q218	8-729-144-81 s	TRANSISTOR 2SC4176T1B33B34B35
Q1001	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1002	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q1501	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1502	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1503	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1504	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1601	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1602	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1603	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1604	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1605	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q1701	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
R098	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R099	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R101	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R102	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R103	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R104	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R106	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R108	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R109	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R110	1-220-804-81 s	RES, CHIP 2.2M (1005)
R111	1-220-804-81 s	RES, CHIP 2.2M (1005)
R112	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R113	1-243-975-81 s	RES, CHIP 4.7M (1005)
R114	1-243-975-81 s	RES, CHIP 4.7M (1005)
R115	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R116	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R117	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R118	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R119	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R120	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R123	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R124	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R125	1-250-551-11 s	RES, METAL FILM CHIP 220K(1005)
R126	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R129	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R132	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R133	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R134	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R135	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R136	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R137	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R139	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R140	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R142	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R143	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R145	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R146	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R150	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R151	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R152	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R153	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R154	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R155	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R156	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R157	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R158	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R159	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R160	1-243-975-81 s	RES, CHIP 4.7M (1005)
R161	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R162	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R163	1-250-507-11 o	RES, METAL FILM CHIP 3.3K(1005)
R164	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R165	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R166	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R167	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R168	1-248-352-11 s	RES, METAL FILM 2.2 (2012)
R169	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R170	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R171	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R172	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R173	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R174	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R175	1-242-967-81 s	RES, CHIP 1.0 (1005)
R176	1-242-967-81 s	RES, CHIP 1.0 (1005)
R177	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R178	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R179	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R180	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R181	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R182	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R183	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R184	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R185	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R186	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R187	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R188	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R189	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R190	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R191	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R192	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R193	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R194	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R195	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R196	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R197	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R198	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R199	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R200	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R201	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R203	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R204	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R205	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R206	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R207	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R208	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R211	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R212	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R220	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R221	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R222	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R223	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R224	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R225	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R226	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R227	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R228	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R229	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R230	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R231	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R232	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R233	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R234	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R235	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R236	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R237	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R238	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R239	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R240	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R241	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R242	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R243	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R245	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R246	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R248	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R249	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R250	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R251	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R252	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R253	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R254	1-250-451-11 s	RES, METAL FILM CHIP 15 (1005)
R255	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R256	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R257	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R258	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R259	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R260	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R261	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R262	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R263	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R264	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R265	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R266	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R267	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R268	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R269	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R270	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R271	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R272	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R273	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R274	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R275	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R276	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R277	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R278	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R279	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R280	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R281	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R282	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R284	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R285	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R286	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R287	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R288	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R289	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R290	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R292	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R293	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R294	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R295	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R297	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R298	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R299	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R301	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R302	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R304	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R305	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R306	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R309	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R310	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R311	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R313	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R314	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R316	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R318	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R320	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R321	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R323	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R324	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R401	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R404	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R407	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R408	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R409	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R410	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R411	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R412	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R413	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R414	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R415	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R416	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R417	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R418	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R419	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R420	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R421	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R423	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R425	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R428	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R429	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R432	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R433	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R434	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R435	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R501	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R502	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1022	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1023	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1024	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R1026	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1027	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1028	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1029	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1030	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1032	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1033	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1034	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1035	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1036	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1037	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R1039	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1040	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1101	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1200	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1201	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1202	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1203	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1204	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1206	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1207	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1208	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1209	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1210	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1211	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1212	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1213	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1218	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1219	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1220	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1221	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1222	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1223	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1224	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1225	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1226	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1227	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1228	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1229	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1230	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1231	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1232	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1233	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1234	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1235	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1236	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1237	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1238	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1239	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R1240	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1241	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1242	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1243	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R1244	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1245	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1246	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1247	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1248	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1249	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1250	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R1251	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R1252	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1253	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1254	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1501	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1502	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1503	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1504	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R1505	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1506	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1507	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1508	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1509	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1510	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1511	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1512	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R1513	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1515	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1516	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1517	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1518	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1520	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1521	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1522	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1523	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1524	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1525	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1526	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1527	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1528	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R1529	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1531	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1532	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1546	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1548	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1549	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R1550	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1551	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1552	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1553	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1554	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1555	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1556	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1557	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1558	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R1559	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1560	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1561	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1562	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1563	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1564	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1565	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1566	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1567	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1568	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1570	1-208-911-81 s	RES, CHIP 10K (1005)
R1579	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1580	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1581	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1582	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R1583	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R1584	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1585	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1586	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1587	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1588	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1589	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R1824	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1825	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1829	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R1830	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R1833	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1834	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1838	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R1839	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R1840	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1843	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1844	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1845	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1901	1-250-531-11 s	RES, METAL FILM CHIP 33K (1005)
R1902	1-220-804-81 s	RES, CHIP 2.2M (1005)
R1903	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1905	1-250-531-11 s	RES, METAL FILM CHIP 33K (1005)
R1906	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1907	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1912	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R1913	1-250-475-11 s	RES, METAL FILM CHIP 150 (1005)
R1914	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R1915	1-250-467-11 s	RES, METAL FILM CHIP 68 (1005)
R1916	1-250-547-11 s	RES, METAL FILM CHIP 150K (1005)
R1917	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R1918	1-250-507-11 o	RES, METAL FILM CHIP 3.3K (1005)
R1919	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R1920	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1922	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1923	1-250-539-11 o	RES, METAL FILM CHIP 68K (1005)
R1924	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R1925	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R1926	1-250-535-11 s	RES, METAL FILM CHIP 47K (1005)
R1927	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1928	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1929	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R1930	1-250-483-11 s	RES, METAL FILM CHIP 330 (1005)
R1931	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R1932	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1933	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R1934	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1935	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R1936	1-250-527-11 o	RES, METAL FILM CHIP 22K (1005)
R1937	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R1940	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R1941	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1942	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1943	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R2201	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2202	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2203	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R2204	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R2205	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2206	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2207	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R2208	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R2209	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R2210	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R2211	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R2212	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R2213	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2214	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2215	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2217	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R2218	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2219	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)

DM-152 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2601	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2602	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R2603	1-250-543-11 o	RES, METAL FILM CHIP 100K (1005)
R2604	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2605	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2606	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2607	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2608	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2609	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2610	1-250-555-11 s	RES, METAL FILM CHIP 330K (1005)
R2611	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2612	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2613	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2614	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2615	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2616	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2617	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2618	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2619	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2901	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R2902	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2903	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2904	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2905	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R2906	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2907	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2908	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2909	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2910	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R2911	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2913	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2914	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R2915	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2916	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2917	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2918	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2919	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2920	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2921	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2922	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2923	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2924	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2925	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R3401	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R3402	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R3403	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R3404	1-250-515-11 s	RES, METAL FILM CHIP 6.8K (1005)
R3406	1-250-543-11 o	RES, METAL FILM CHIP 100K (1005)
R3412	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3413	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R3415	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R3416	1-250-539-11 o	RES, METAL FILM CHIP 68K (1005)
R3417	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R3418	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R3419	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R3420	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R3421	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R3422	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R3423	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R3424	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R3425	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R3429	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R3430	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R3431	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R3432	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)

DM-152 BOARD**Ref. No.****or Q'ty Part No. SP Description**

RB1904	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1905	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1906	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1907	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1908	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1909	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1910	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1911	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1912	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1913	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1914	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1915	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1917	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1918	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1919	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1920	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1921	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1922	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1923	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1924	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1925	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1926	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1927	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1928	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1929	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1930	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1931	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1932	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1933	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1940	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2201	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2202	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2203	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2204	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2205	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2206	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2207	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2209	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3401	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3601	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3701	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3901	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RV202	1-225-788-21	s	RES, ADJ, CERMET 1K
RV1503	1-225-789-21	s	RES, ADJ, CERMET 2K
T201	1-445-612-11	s	TRANSFORMER, BALUN
T202	1-445-611-11	s	TRANSFORMER, BALUN
T203	1-445-612-11	s	TRANSFORMER, BALUN
T204	1-445-611-11	s	TRANSFORMER, BALUN
TP201	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP1501	1-535-877-22	s	CHIP, CHECKER
TP1502	1-535-877-22	s	CHIP, CHECKER
TP1505	1-535-877-22	s	CHIP, CHECKER
X201	1-814-052-21	s	VIBRATOR, CRYSTAL 4MHZ (8045) (4 MHZ)
X401	1-813-480-11	s	OSCILLATOR, CRYSTAL
X601	1-814-223-11	s	OSCILLATOR, CRYSTAL
X801	1-813-480-11	s	OSCILLATOR, CRYSTAL

DPR-361 BOARD [SUFFIX -11, 12]**Ref. No.****or Q'ty Part No. SP Description**

1pc	A-1974-701-A	s	MOUNTED CIRCUIT BOARD, DPR-361
3pcs	3-637-901-02	s	SCREW M2.6X5
BT100	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C001	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C002	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C003	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C004	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C005	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C006	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C008	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C010	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C012	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C013	1-116-118-11	s	CAP, ELECT 47MF 105
C014	1-116-118-11	s	CAP, ELECT 47MF 105
C015	1-116-118-11	s	CAP, ELECT 47MF 105
C016	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C017	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C018	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C019	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C020	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C021	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C022	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C023	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C024	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C025	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C026	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C027	1-116-709-11	s	CAP, CERAMIC 22MF X5R 3225
C028	1-116-709-11	s	CAP, CERAMIC 22MF X5R 3225
C029	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C030	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C031	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C032	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C033	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C035	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C036	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C038	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C039	1-116-118-11	s	CAP, ELECT 47MF 105
C040	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C041	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C042	1-114-326-11	s	CAP, CERAMIC 0.22MF X7R 1608
C043	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C044	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C045	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C046	1-116-709-11	s	CAP, CERAMIC 22MF X5R 3225
C047	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C048	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C049	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C050	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C051	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C053	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C054	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C056	1-116-709-11	s	CAP, CERAMIC 22MF X5R 3225
C058	1-116-709-11	s	CAP, CERAMIC 22MF X5R 3225
C059	1-116-737-11	s	CAP, CERAMIC 1MF X5R 1005
C060	1-100-591-91	s	CAP, CHIP CERAMIC 1MF B 2012
C062	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005
C063	1-114-326-11	s	CAP, CERAMIC 0.22MF X7R 1608
C064	1-116-707-11	s	CAP, CERAMIC 47MF X5R 3216
C065	1-116-713-11	s	CAP, CERAMIC 22MF X5R 2012
C066	1-116-118-11	s	CAP, ELECT 47MF 105
C067	1-114-582-91	s	CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C068	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C069	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C070	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C071	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C072	1-118-046-11 s	CAP, CERAMIC 4.7MF X5R (2012)
C073	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C074	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C075	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C077	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C078	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C080	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C081	1-116-118-11 s	CAP, ELECT 47MF 105
C082	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C083	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C084	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C085	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C086	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C087	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C088	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C091	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C092	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C093	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C094	1-116-865-11 s	CAP, CERAMIC 10MF X5R 3216
C095	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C098	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C099	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C100	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C101	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C102	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C104	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C106	1-137-894-21 s	CAP, CHIP ELECT 470MF
C107	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C114	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C115	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C117	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C118	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C119	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C120	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C121	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C122	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C123	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C124	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C125	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C126	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C127	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C128	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C129	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C130	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C131	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C132	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C133	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C134	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C135	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C136	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C137	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C138	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C139	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C140	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C141	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C142	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C143	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C144	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C145	1-126-402-21 s	CAP, CHIP ELECT 2.2MF (4X5.7)
C146	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C147	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C149	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C150	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C151	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C152	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C200	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C201	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C202	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C203	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C204	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C205	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C206	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C207	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C208	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C209	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C217	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C218	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C219	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C220	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C221	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C222	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C223	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C224	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C225	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C226	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C227	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C228	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C229	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C230	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C231	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C232	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C300	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C301	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C302	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C303	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C304	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C305	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C306	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C307	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C308	1-131-661-21 s	CAP, CHIP ELECT 100MF (6.3X5.7)
C309	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C310	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C312	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C313	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C314	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C317	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C319	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C320	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C321	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C322	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C323	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C324	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C325	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C400	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C401	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C402	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C404	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C405	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C408	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C409	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C411	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C417	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C418	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C419	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C420	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C421	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C422	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C423	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C500	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C501	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C502	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C503	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C510	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C512	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C513	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C514	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C515	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C516	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C517	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C520	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C521	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C522	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C523	1-100-573-81 s	CAP,CHIP CERAMIC 390PF B 1005
C525	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C526	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C527	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C528	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C529	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C534	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C535	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C536	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C537	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C538	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C539	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C541	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C542	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C544	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C545	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C546	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C547	1-164-860-81 s	CAP, CHIP CERAMIC 27PF CH 1005
C548	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C549	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C550	1-164-860-81 s	CAP, CHIP CERAMIC 27PF CH 1005
C551	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C552	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C553	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C554	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C555	1-164-880-81 s	CAP,CHIP CERAMIC 180PF CH 1005
C556	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C557	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C600	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C604	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C605	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C607	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C608	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C609	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C611	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C612	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C613	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C614	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C615	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C616	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C617	1-127-950-21 s	CAP, CHIP FILM 0.01MF (2012)
C618	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C619	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C620	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C621	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C622	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C623	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C625	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C626	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C627	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C629	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C630	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C631	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C632	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C633	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C638	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C639	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C640	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C641	1-126-391-21 s	CAP, CHIP ELECT 47MF (5X5.7)
C642	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C643	1-117-144-21 s	CAP, ELECT 0.47MF
C644	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C645	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C646	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C647	1-126-394-21 s	CAP, CHIP ELECT 10MF (4X5.7)
C648	1-164-878-81 s	CAP,CHIP CERAMIC 150PF CH 1005
C649	1-126-391-21 s	CAP, CHIP ELECT 47MF (5X5.7)
C650	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C659	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C660	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C662	1-117-144-21 s	CAP, ELECT 0.47MF
C663	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C664	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C665	1-127-956-21 s	CAP, CHIP FILM 0.1MF (3225)
C666	1-126-394-21 s	CAP, CHIP ELECT 10MF (4X5.7)
C667	1-164-878-81 s	CAP,CHIP CERAMIC 150PF CH 1005
C668	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C669	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C670	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C671	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C672	1-126-391-21 s	CAP, CHIP ELECT 47MF (5X5.7)
C673	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C674	1-126-391-21 s	CAP, CHIP ELECT 47MF (5X5.7)
C675	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C676	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C677	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C700	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C701	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C702	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C703	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C705	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C707	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C709	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C710	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C713	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C714	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C715	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C716	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C717	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C718	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C719	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C720	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C721	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C722	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C723	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C724	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C725	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C726	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C727	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C728	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C729	1-114-548-11 s	CAP, NIOBIUM ELECT 22UF
C730	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C731	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C732	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C733	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C735	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C736	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C737	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C740	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C741	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C742	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C743	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C744	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C745	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C746	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C747	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C748	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C749	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C750	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C751	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C800	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C804	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C805	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C807	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C808	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C809	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C810	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C813	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C814	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C817	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C818	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C819	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C820	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C821	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C822	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C823	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C824	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C825	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C826	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C837	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C838	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C839	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C843	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C844	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C845	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C849	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C850	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C851	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C855	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C856	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C857	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C858	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C900	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C901	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C902	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C903	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C904	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C905	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C906	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C907	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C908	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C909	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C910	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C911	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C912	1-164-939-81 s	CAP, CHIPCERAMIC 2200PF B 1005
C913	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C914	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C915	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C916	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C917	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C918	1-126-402-21 s	CAP, CHIP ELECT 2.2MF (4X5.7)
C919	1-164-939-81 s	CAP, CHIPCERAMIC 2200PF B 1005
C920	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C921	1-164-939-81 s	CAP, CHIPCERAMIC 2200PF B 1005
C922	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C923	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C924	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C925	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C926	1-126-402-21 s	CAP, CHIP ELECT 2.2MF (4X5.7)
C927	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C928	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C929	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C930	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C931	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C932	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C933	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C934	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C935	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C936	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C937	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C938	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C939	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C940	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C941	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C942	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C943	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C944	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C945	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C946	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C947	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C948	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C949	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C950	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C951	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C952	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C953	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C954	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C955	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C956	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C957	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C958	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C959	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C960	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C961	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C962	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C963	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C964	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C965	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C966	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C967	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C968	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C969	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C970	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C971	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C972	1-107-781-21 s	CAP, ELECT 47MF
C973	1-107-781-21 s	CAP, ELECT 47MF
C974	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C975	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C976	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C977	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C978	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C979	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C980	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C981	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C982	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C983	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C984	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C985	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C986	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C987	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C988	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C989	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C990	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C991	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1050	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1051	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1052	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1053	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1054	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1055	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1056	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1057	1-164-939-81 s	CAP, CHIP CERAMIC 220PF B 1005
C1058	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1059	1-164-939-81 s	CAP, CHIP CERAMIC 220PF B 1005
C1060	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1061	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1062	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C1063	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1064	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1065	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1066	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1067	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1068	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1069	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1070	1-126-402-21 s	CAP, CHIP ELECT 2.2MF (4X5.7)
C1071	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1072	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1073	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1074	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1075	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1076	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1077	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1078	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1079	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1080	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1081	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1082	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1083	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1084	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1085	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1086	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1087	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1088	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1089	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1090	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1091	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1092	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1093	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1094	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1095	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1096	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1097	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1098	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1099	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1100	1-114-214-81 s	CAP,CHIP CERAMIC470PF CH1005
C1101	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1102	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1103	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1104	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1105	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1106	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1107	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1108	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1109	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1110	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1111	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1112	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1113	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1114	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1115	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1116	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1117	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1118	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1119	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1120	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1121	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1122	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1123	1-107-781-21 s	CAP, ELECT 47MF
C1124	1-107-781-21 s	CAP, ELECT 47MF
C1125	1-107-781-21 s	CAP, ELECT 47MF
C1126	1-107-781-21 s	CAP, ELECT 47MF
C1127	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C1128	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1129	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B (3225)
C1130	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B (3225)
C1131	1-117-713-21 s	CAP, CHIP ELECT 100MF
C1132	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1133	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1134	1-117-713-21 s	CAP, CHIP ELECT 100MF
C1135	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1136	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1137	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1138	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1139	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1140	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1141	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1142	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1143	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1144	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1145	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1146	1-116-484-91 s	CAP, CERAMIC 0.1MF C 1005
C1147	1-116-484-91 s	CAP, CERAMIC 0.1MF C 1005
C1148	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1149	1-116-484-91 s	CAP, CERAMIC 0.1MF C 1005
C1150	1-116-484-91 s	CAP, CERAMIC 0.1MF C 1005
C1151	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1152	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1153	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1154	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1155	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1300	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1301	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1302	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1303	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1304	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1305	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1306	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C1307	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1308	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1309	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1310	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1311	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1312	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1313	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1314	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1315	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1316	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1317	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1319	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1320	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1321	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1322	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1323	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1324	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1325	1-116-709-11 s	CAP, CERAMIC 22MF X5R 3225
C1326	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1327	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C1328	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1329	1-126-396-21 s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1400	1-116-484-91 s	CAP, CERAMIC 0.1MF C 1005
C1401	1-116-484-91 s	CAP, CERAMIC 0.1MF C 1005
C1402	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1408	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C1409	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C1410	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1411	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1413	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1414	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1415	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1416	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1417	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1418	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1420	1-164-939-81 s	CAP, CHIP CERAMIC 2200PF B 1005
C1421	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1422	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1423	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1424	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1425	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1426	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1600	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1601	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1602	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1603	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1604	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1605	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1606	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1607	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1608	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1609	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1610	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1611	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1612	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1613	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1614	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1615	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1616	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1617	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1618	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1619	1-116-720-11 o	CAP, CERAMIC 10MF X5R 1608
C1620	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1621	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1622	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1623	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1624	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1625	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1626	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1627	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1628	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1629	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1630	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1631	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1700	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1701	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1702	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1703	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1704	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1705	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1706	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1707	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1708	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1709	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C1710	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1711	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1712	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1713	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1714	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1715	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C1716	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

[illegible]

Ref. No. or Q'ty	Part No.	SP Description
C2155	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2156	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2157	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2158	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2159	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2200	1-116-707-11	s CAP, CERAMIC 47MF X5R 3216
C2201	1-116-707-11	s CAP, CERAMIC 47MF X5R 3216
C2202	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C2203	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C2204	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2206	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2207	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2212	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C2213	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2214	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2215	1-116-707-11	s CAP, CERAMIC 47MF X5R 3216
C2216	1-116-707-11	s CAP, CERAMIC 47MF X5R 3216
C2217	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C2218	1-164-848-81	s CAP, CHIP CERAMIC 8PF CH 1005
C2219	1-116-737-11	s CAP, CERAMIC 1MF X5R 1005
C2220	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C2221	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C2222	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2223	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2224	1-127-954-21	s CAP, CHIP FILM 0.047MF (3216)
C2225	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C2226	1-118-047-11	s CAP, CERAMIC 10MF X5R (2012)
C2227	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2228	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2229	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2230	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2231	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2232	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2233	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2234	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2235	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2236	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2237	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2238	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2239	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2240	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2241	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2242	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2243	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2244	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2245	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2246	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2247	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2248	1-116-720-11	o CAP, CERAMIC 10MF X5R 1608
C2249	1-116-707-11	s CAP, CERAMIC 47MF X5R 3216
C2300	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2301	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2302	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2303	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2307	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2308	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2309	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2310	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	s CAP, CERAMIC 0.1MF B 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C2313	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2314	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2315	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2316	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2319	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2320	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2321	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2322	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2323	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2324	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2325	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2327	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C2328	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C2329	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C2330	1-164-848-81 s	CAP, CHIP CERAMIC 8PF CH 1005
C2332	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2333	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2334	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2335	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2336	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2337	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2338	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2339	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2340	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2341	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2342	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2343	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2344	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2345	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2346	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2347	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2450	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2451	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2452	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2453	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2454	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2455	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2456	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2469	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2470	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2471	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2472	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2473	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2474	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2475	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2476	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2478	1-164-844-81 s	CAP, CHIP CERAMIC 4PF CH 1005
C2483	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2484	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2485	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2486	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2487	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2488	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2600	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2601	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2602	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2603	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2604	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2605	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2606	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2607	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2608	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2609	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
C2610	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2611	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C2614	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2615	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2616	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2617	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2618	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2619	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2620	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C2621	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2622	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2623	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2627	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2628	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2629	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2630	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2631	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2632	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2633	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2634	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2635	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2636	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2637	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2638	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2639	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2640	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2641	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C2642	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C2643	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C2644	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2645	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2646	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2647	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2648	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2649	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C2650	1-116-713-11 s	CAP, CERAMIC 22MF X5R 2012
C2651	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2652	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2653	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2654	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2655	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2656	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2700	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2701	1-118-041-11 s	CAP, CERAMIC 4.7MF X5R (1608)
C2702	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2703	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C2704	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2705	1-118-047-11 s	CAP, CERAMIC 10MF X5R (2012)
C2706	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2708	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C2709	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
CN001	1-764-250-21 s	PIN, CONNECTOR (PC BOARD) 4P
CN002	1-770-468-21 s	PIN, CONNECTOR (PC BOARD) 10P
CN003	1-770-469-21 s	PIN, CONNECTOR (PC BOARD) 2P
CN100	1-821-409-21 s	CONNECTOR, BOARD TO BOARD 40P
CN101	1-784-650-21 s	CONNECTOR 2P
CN102	1-784-650-21 s	CONNECTOR 2P
CN300	1-817-196-11 s	JACK, MODULAR
CN800	1-784-254-21 s	CONNECTOR 10P
CN1300	1-784-254-21 s	CONNECTOR 10P
CN1400	1-750-890-11 s	CONNECTOR,D-SUB (ANGLE TYPE) 25P
CN1900	1-843-236-11 s	HEADER ASSEMBLY FOR PWB ST 41P
CN2000	1-819-993-11 s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN2001	1-819-993-11 s	CONNECTOR, COAXIAL(BNC DOUBLE)
CN2002	1-819-993-11 s	CONNECTOR, COAXIAL(BNC DOUBLE)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
CN2050	1-784-254-21 s	CONNECTOR 10P
CN2600	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2601	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2700	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2701	1-843-236-11 s	HEADER ASSEMBLY FOR PWB ST 41P
CN2702	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2703	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN2704	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
D001	6-501-123-01 s	DIODE RB160M-60TR
D002	6-501-123-01 s	DIODE RB160M-60TR
D003	8-719-069-54 s	DI UDZSUSTE-175.1B
D004	8-719-069-28 s	DI 1SS400FJTE61
D005	8-719-991-01 s	DIODE DAP222-TL
D006	6-502-197-01 s	DI SML-D12M8WT86SM
D007	8-719-083-60 s	DI UDZSUSTE-174.7B
D008	8-719-083-60 s	DI UDZSUSTE-174.7B
D100	△ 8-719-070-20 s	DIODE RB706F-40
D101	8-719-024-71 s	DIODE 1SS362-TE85L
D102	8-719-082-45 s	DIODE RB715W-TL
D200	8-719-024-71 s	DIODE 1SS362-TE85L
D201	6-500-122-01 s	DIODE CL-375HR/YG-D-TS
D600	8-719-820-42 s	DIODE 1SS302-TE85L
D601	6-502-197-01 s	DI SML-D12M8WT86SM
D602	8-719-820-42 s	DIODE 1SS302-TE85L
D603	8-719-820-42 s	DIODE 1SS302-TE85L
D604	6-502-598-01 s	DI SML-D12U8WT86
D605	8-719-024-71 s	DIODE 1SS362-TE85L
D606	8-719-024-71 s	DIODE 1SS362-TE85L
D607	8-719-024-71 s	DIODE 1SS362-TE85L
D608	8-719-024-71 s	DIODE 1SS362-TE85L
D800	8-719-077-09 s	DIODE CL-196HR-CD-T
D1050	8-719-024-71 s	DIODE 1SS362-TE85L
D1051	8-719-024-71 s	DIODE 1SS362-TE85L
D1052	8-719-083-82 s	DI UDZSUSTE-1712B
D1053	8-719-083-82 s	DI UDZSUSTE-1712B
D1054	8-719-083-82 s	DI UDZSUSTE-1712B
D1055	8-719-083-82 s	DI UDZSUSTE-1712B
D1056	8-719-024-71 s	DIODE 1SS362-TE85L
D1400	8-719-024-81 s	DIODE 1SS300-TE85L
D1401	8-719-024-81 s	DIODE 1SS300-TE85L
D1402	8-719-024-81 s	DIODE 1SS300-TE85L
D1403	8-719-024-81 s	DIODE 1SS300-TE85L
D1404	8-719-024-81 s	DIODE 1SS300-TE85L
D1405	8-719-024-81 s	DIODE 1SS300-TE85L
D1406	8-719-024-81 s	DIODE 1SS300-TE85L
D1407	8-719-024-81 s	DIODE 1SS300-TE85L
D1408	8-719-024-81 s	DIODE 1SS300-TE85L
D1409	8-719-024-81 s	DIODE 1SS300-TE85L
D1410	8-719-024-81 s	DIODE 1SS300-TE85L
D1411	8-719-024-81 s	DIODE 1SS300-TE85L
D1412	8-719-024-81 s	DIODE 1SS300-TE85L
D1413	8-719-024-81 s	DIODE 1SS300-TE85L
D1414	8-719-024-81 s	DIODE 1SS300-TE85L
D1415	8-719-024-81 s	DIODE 1SS300-TE85L
D1416	8-719-024-71 s	DIODE 1SS362-TE85L
D1700	8-719-082-45 s	DIODE RB715W-TL
D2050	6-502-598-01 s	DI SML-D12U8WT86
E001	1-535-877-22 s	CHIP, CHECKER
E002	1-535-877-22 s	CHIP, CHECKER
E003	1-535-877-22 s	CHIP, CHECKER
E004	1-535-877-22 s	CHIP, CHECKER
E005	1-535-877-22 s	CHIP, CHECKER
E006	1-535-877-22 s	CHIP, CHECKER
E007	1-535-877-22 s	CHIP, CHECKER

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
E008	1-535-877-22 s	CHIP, CHECKER
FB001	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB500	1-400-832-21 s	SMD EMI FERRITE
FB600	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB601	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB800	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1400	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1401	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1402	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1403	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1404	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1405	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1800	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1801	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1802	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1900	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB1901	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2000	1-414-554-21 s	FERRITE, EMI (SMD) (1608)
FB2001	1-414-554-21 s	FERRITE, EMI (SMD) (1608)
FB2002	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2003	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2004	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2005	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2006	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2007	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2008	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2009	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2010	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2011	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2013	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2050	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB2200	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2201	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2300	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2301	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2302	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB2450	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FL2300	1-200-152-11 s	FILTER (LPF)
FL2301	1-200-152-11 s	FILTER (LPF)
FL2302	1-200-152-11 s	FILTER (LPF)
FL2303	1-200-153-11 s	FILTER (EQ1)
FL2304	1-200-153-11 s	FILTER (EQ1)
FL2305	1-200-153-11 s	FILTER (EQ1)
FL2306	1-200-154-11 s	FILTER (EQ2)
FL2307	1-200-154-11 s	FILTER (EQ2)
FL2308	1-200-154-11 s	FILTER (EQ2)
FL2450	1-813-544-11 s	FILTER, LOW PASS
FL2451	1-813-544-11 s	FILTER, LOW PASS
FL2452	1-813-544-11 s	FILTER, LOW PASS
IC001	6-714-911-01 s	IC TPS54325PWPR
IC002	6-714-911-01 s	IC TPS54325PWPR
IC003	6-714-911-01 s	IC TPS54325PWPR
IC004	6-712-135-01 o	IC R1173H001D-T1-FE
IC005	6-712-135-01 o	IC R1173H001D-T1-FE
IC006	6-711-654-01 s	IC TPS5420DRG4
IC007	6-714-911-01 s	IC TPS54325PWPR
IC008	6-712-135-01 o	IC R1173H001D-T1-FE
IC009	6-712-135-01 o	IC R1173H001D-T1-FE
IC010	6-712-135-01 o	IC R1173H001D-T1-FE
IC011	6-711-654-01 s	IC TPS5420DRG4
IC013	6-712-135-01 o	IC R1173H001D-T1-FE
IC014	6-714-911-01 s	IC TPS54325PWPR
IC015	6-712-135-01 o	IC R1173H001D-T1-FE

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
IC016	8-759-338-95 s	IC NJM2903V (TE2)
IC017	6-714-911-01 s	IC TPS54325PWPR
IC018	8-759-278-58 s	IC NJM4558V-TE2
IC102	6-707-856-01 s	IC TC74LCX74FT (EKJ)
IC103	8-759-648-04 s	IC RTC-4574JE
IC105	6-704-566-01 s	IC R3112N291A-TR-FE
IC106	6-704-600-01 s	IC M24C02-WMN6T (B)
IC107	6-704-600-01 s	IC M24C02-WMN6T (B)
IC108	6-707-845-01 s	IC TC74LCX138FT (EKJ)
IC109	6-707-856-01 s	IC TC74LCX74FT (EKJ)
IC110	6-702-319-01 s	IC TC7WZ04FK
IC111	8-759-656-54 s	IC TC7WH14FK
IC112	8-759-669-66 s	IC TLC272CPWR-12
IC113	8-759-330-14 s	IC TL7700CPS-E20
IC114	8-759-656-54 s	IC TC7WH14FK
IC115	6-706-487-01 s	IC TC7SH08FU
IC200	6-706-487-01 s	IC TC7SH08FU
IC201	6-808-528-01 s	IC MX29LV160DBTI-70G
IC202	6-808-528-01 s	IC MX29LV160DBTI-70G
IC203	8-759-669-68 s	IC SN74CBT3253PWR-12
IC204	6-717-050-01 s	IC W9825G6JH-6-ER10
IC205	6-717-050-01 s	IC W9825G6JH-6-ER10
IC206	6-707-849-01 s	IC TC74LCX244FT (EKJ)
IC207	6-717-192-01 s	IC MB85R256GPFCN
IC208	6-717-192-01 s	IC MB85R256GPFCN
IC209	8-759-584-32 s	IC MB86189PMC-G-BND-ER-E1
IC210	6-702-319-01 s	IC TC7WZ04FK
IC211	6-702-319-01 s	IC TC7WZ04FK
IC212	6-706-483-01 s	IC TC7SH02FU
IC213	6-706-488-01 s	IC TC7SH14FU
IC301	6-705-277-01 s	IC S-93C46BD0I-J8T1-G
IC302	6-702-319-01 s	IC TC7WZ04FK
IC303	6-600-060-01 s	IC TC7WZ32FK
IC304	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC400	6-702-879-01 s	IC R3112N281A-TR-FE
IC401	6-707-849-01 s	IC TC74LCX244FT (EKJ)
IC402	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC403	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC404	6-707-849-01 s	IC TC74LCX244FT (EKJ)
IC405	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC406	6-707-849-01 s	IC TC74LCX244FT (EKJ)
IC407	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC408	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC409	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC410	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC411	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC412	6-707-845-01 s	IC TC74LCX138FT (EKJ)
IC413	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC414	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC415	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC416	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC417	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC418	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC419	8-759-656-54 s	IC TC7WH14FK
IC420	6-707-842-01 s	IC TC74LCX08FT (EKJ)
IC421	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC500	8-759-287-55 s	IC TC7S66FU (TE85R)
IC501	8-759-675-54 s	IC TC7W53FK (TE85R)
IC502	8-759-675-54 s	IC TC7W53FK (TE85R)
IC505	8-759-327-14 s	IC TL712CPSR
IC506	8-759-327-14 s	IC TL712CPSR
IC507	6-712-902-01 s	IC LMH1980MM
IC508	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC509	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC510	8-759-561-46 s	IC AD8014ARTZ-REEL7

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
IC512	8-759-669-66 s	IC TLC272CPWR-12
IC513	6-704-099-01 s	IC TC7WZ08FK
IC514	6-704-099-01 s	IC TC7WZ08FK
IC600	8-759-485-24 s	IC MC74HC4046ADTR2
IC601	8-759-485-24 s	IC MC74HC4046ADTR2
IC602	8-759-675-54 s	IC TC7W53FK (TE85R)
IC603	8-759-675-54 s	IC TC7W53FK (TE85R)
IC604	8-759-675-54 s	IC TC7W53FK (TE85R)
IC605	6-715-035-01 s	IC TC7SZ02FU, RSONYJ
IC606	6-708-277-01 s	IC CDCVF25081PWR
IC607	6-708-277-01 s	IC CDCVF25081PWR
IC608	6-706-478-01 s	IC TC7SET08FU
IC609	6-706-478-01 s	IC TC7SET08FU
IC610	8-759-669-66 s	IC TLC272CPWR-12
IC611	6-706-478-01 s	IC TC7SET08FU
IC612	6-706-478-01 s	IC TC7SET08FU
IC613	8-759-669-66 s	IC TLC272CPWR-12
IC615	6-707-414-01 s	IC DS90LV011ATMF
IC616	6-708-346-01 s	IC DAC7512N
IC617	8-759-669-66 s	IC TLC272CPWR-12
IC618	8-759-523-04 s	IC TC74HC4538AFT (EL)
IC622	6-704-099-01 s	IC TC7WZ08FK
IC623	8-759-669-66 s	IC TLC272CPWR-12
IC625	6-708-346-01 s	IC DAC7512N
IC626	8-759-523-04 s	IC TC74HC4538AFT (EL)
IC701	6-712-382-01 s	IC TC74VHC4053AFT (EK)
IC702	8-759-248-78 s	IC MB88102PFV-G-BND-ER
IC703	8-759-485-24 s	IC MC74HC4046ADTR2
IC704	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC705	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC706	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC707	8-759-346-27 s	IC LM45BIM3X
IC708	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC709	6-715-041-01 s	IC TC7SZ125FU, RSONYJ
IC710	6-712-382-01 s	IC TC74VHC4053AFT (EK)
IC711	8-759-669-66 s	IC TLC272CPWR-12
IC712	6-715-034-01 s	IC TC7SZ00FU, RSONYJ
IC713	6-706-488-01 s	IC TC7SH14FU
IC714	6-706-488-01 s	IC TC7SH14FU
IC801	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC802	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC804	6-707-842-01 s	IC TC74LCX08FT (EKJ)
IC805	6-711-485-01 s	IC TC74VCX125FK (EL)
IC806	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC900	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC901	6-711-237-01 s	IC NJM2878F3-33 (TE2)
IC902	6-700-563-01 s	IC AK4552VT-E2
IC903	6-700-563-01 s	IC AK4552VT-E2
IC904	8-759-675-54 s	IC TC7W53FK (TE85R)
IC905	8-759-675-54 s	IC TC7W53FK (TE85R)
IC906	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC907	6-707-884-01 s	IC TC74VHCT04AFT (EKJ)
IC908	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC909	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC910	8-759-278-58 s	IC NJM4558V-TE2
IC911	8-759-278-58 s	IC NJM4558V-TE2
IC912	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC913	8-759-356-17 s	IC NJM4556AM-A-TE2
IC1050	6-700-563-01 s	IC AK4552VT-E2
IC1051	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1052	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1053	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1054	8-759-278-58 s	IC NJM4558V-TE2
IC1055	8-759-278-58 s	IC NJM4558V-TE2
IC1056	8-759-356-17 s	IC NJM4556AM-A-TE2

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
IC1057	8-759-422-21 s	IC NJM4580V (TE2)
IC1058	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC1060	8-759-422-21 s	IC NJM4580V (TE2)
IC1061	6-706-484-01 s	IC TC7SH04FU
IC1062	8-759-278-58 s	IC NJM4558V-TE2
IC1063	8-759-356-17 s	IC NJM4556AM-A-TE2
IC1064	8-759-530-05 s	IC TC4053BFT (EL,N)
IC1065	8-759-530-05 s	IC TC4053BFT (EL,N)
IC1300	6-701-111-01 s	IC AK4382AVT-E2
IC1301	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1302	8-759-675-54 s	IC TC7W53FK (TE85R)
IC1303	8-759-278-58 s	IC NJM4558V-TE2
IC1304	8-759-422-21 s	IC NJM4580V (TE2)
IC1305	8-759-422-21 s	IC NJM4580V (TE2)
IC1400	6-706-478-01 s	IC TC7SET08FU
IC1401	8-759-256-45 s	IC NJM4560M-TE2
IC1402	6-701-904-01 s	IC SN75179BPSR
IC1403	6-707-865-01 s	IC TC74VHC125FT (EKJ)
IC1404	6-707-865-01 s	IC TC74VHC125FT (EKJ)
IC1405	6-706-484-01 s	IC TC7SH04FU
IC1600	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC1601	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC1602	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC1603	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC1700	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC1800	8-759-672-76 s	IC AK9813BF-E2
IC1801	6-707-842-01 s	IC TC74LCX08FT (EKJ)
IC1900	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC1901	6-718-678-01 s	IC W9864G2JH-6I-ER10
IC2001	6-720-616-01 s	IC GS1674-INTE3
IC2004	6-720-616-01 s	IC GS1674-INTE3
IC2005	8-759-831-52 s	IC TC7WH125FK
IC2006	8-759-831-52 s	IC TC7WH125FK
IC2007	8-759-680-48 s	IC TC7WH157FK
IC2008	8-759-683-80 s	IC SN65LVDS1DBVR
IC2009	8-759-683-80 s	IC SN65LVDS1DBVR
IC2010	8-759-683-80 s	IC SN65LVDS1DBVR
IC2011	8-759-680-48 s	IC TC7WH157FK
IC2050	6-716-953-01 s	IC W25Q64CVSSIG
IC2051	6-704-566-01 s	IC R3112N291A-TR-FE
IC2052	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2054	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC2055	6-715-036-01 s	IC TC7S204FU, RSONYJ
IC2056	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC2057	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC2058	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2059	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2200	6-706-358-02 s	IC AD5424YCPZ-REEL7
IC2204	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2205	6-704-489-01 s	IC AD9283BRSZ-RL80
IC2206	6-707-556-01 s	IC CXD9184R
IC2207	6-706-482-01 s	IC TC7SH00FU
IC2208	8-759-669-66 s	IC TLC272CPWR-12
IC2209	6-706-484-01 s	IC TC7SH04FU
IC2210	8-759-422-21 s	IC NJM4580V (TE2)
IC2211	6-712-388-01 s	IC TC74VHC4053AFK (EK)
IC2213	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2300	6-706-478-01 s	IC TC7SET08FU
IC2301	6-706-471-01 s	IC THS5661AIPWR
IC2302	6-706-471-01 s	IC THS5661AIPWR
IC2303	6-706-471-01 s	IC THS5661AIPWR
IC2304	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2305	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2306	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2307	8-759-561-46 s	IC AD8014ARTZ-REEL7

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
IC2308	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2450	8-759-645-13 s	IC ADV7123KSTZ140
IC2451	6-706-478-01 s	IC TC7SET08FU
IC2452	6-706-478-01 s	IC TC7SET08FU
IC2453	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2454	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2455	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2600	6-707-839-01 s	IC TC74LCX04FT (EKJ)
IC2601	6-718-382-01 s	IC ML86V76653TBZ0AAL
IC2602	6-600-851-01 s	PHOTO COUPLER PC4D10SNIP0F
IC2603	8-759-092-83 s	IC SN75158PSR
IC2604	6-715-039-01 s	IC TC7S208FU, RSONYJ
IC2605	6-706-478-01 s	IC TC7SET08FU
IC2606	6-707-842-01 s	IC TC74LCX08FT (EKJ)
IC2607	6-712-135-01 o	IC R1173H001D-T1-FE
IC2608	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC2609	8-759-675-54 s	IC TC7W53FK (TE85R)
IC2700	6-707-850-01 s	IC TC74LCX245FT (EKJ)
IC2701	6-707-850-01 s	IC TC74LCX245FT (EKJ)
L001	1-457-455-11 s	CHOKE COIL 10UH
L002	1-457-455-11 s	CHOKE COIL 10UH
L003	1-457-455-11 s	CHOKE COIL 10UH
L004	1-457-455-11 s	CHOKE COIL 10UH
L005	1-457-455-11 s	CHOKE COIL 10UH
L006	1-457-455-11 s	CHOKE COIL 10UH
L007	1-481-035-11 s	INDUCTOR (10UH)
L008	1-481-381-21 o	INDUCTOR 100UH
L009	1-457-455-11 s	CHOKE COIL 10UH
L010	1-481-381-21 o	INDUCTOR 100UH
L011	1-481-035-11 s	INDUCTOR (10UH)
L012	1-481-035-11 s	INDUCTOR (10UH)
L013	1-481-035-11 s	INDUCTOR (10UH)
L014	1-481-381-21 o	INDUCTOR 100UH
L016	1-481-381-21 o	INDUCTOR 100UH
L017	1-481-035-11 s	INDUCTOR (10UH)
L018	1-457-455-11 s	CHOKE COIL 10UH
L019	1-481-035-11 s	INDUCTOR (10UH)
L020	1-481-035-11 s	INDUCTOR (10UH)
L022	1-457-455-11 s	CHOKE COIL 10UH
L023	1-457-455-11 s	CHOKE COIL 10UH
L100	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L101	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L102	1-469-553-21 s	INDUCTOR, CHIP 4.7UH (LB2016)
L103	1-469-553-21 s	INDUCTOR, CHIP 4.7UH (LB2016)
L200	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L201	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L202	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L203	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L204	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L205	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L300	1-469-553-21 s	INDUCTOR, CHIP 4.7UH (LB2016)
L301	1-469-553-21 s	INDUCTOR, CHIP 4.7UH (LB2016)
L500	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L501	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L503	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L504	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L507	1-400-790-21 s	INDUCTOR, CHIP 4.7UH (2518)
L509	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L510	1-412-987-41 s	INDUCTOR, SMALL TYPE 4.7UH
L600	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L601	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L602	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L603	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L604	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP	Description
Q201	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q203	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q300	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q301	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q500	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q501	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q502	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q503	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q504	6-551-719-01	o	TRANSISTOR 2SC5876T106QR
Q600	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q601	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q602	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q603	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q604	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q605	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q606	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q607	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q608	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q609	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q610	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q611	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q612	8-729-142-11	s	TRANSISTOR 2SA1226-T1E3E4
Q700	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q800	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q900	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q901	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q902	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q903	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q904	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q905	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q906	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q907	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q908	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1052	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1053	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1054	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1055	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1056	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1057	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1058	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1059	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1060	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1061	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1062	6-551-294-01	s	TRANSISTOR MCH6606-TL-E
Q1063	6-551-294-01	s	TRANSISTOR MCH6606-TL-E
Q1064	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1065	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1066	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1067	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1068	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1069	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1070	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1071	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1072	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1073	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1074	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1075	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1076	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1077	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1078	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1079	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1080	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1081	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1082	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP	Description
Q1083	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1084	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1085	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1086	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1087	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1088	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1089	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1090	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1091	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1092	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1093	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1094	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1096	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1300	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1301	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1302	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1303	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1305	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1306	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1307	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1308	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1309	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q1310	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1311	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1400	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1401	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1402	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1403	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1404	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1405	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1406	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1407	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1408	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1409	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1410	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1411	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1412	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1413	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1414	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1415	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1416	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1417	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2050	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2450	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2451	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q2452	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2453	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q2600	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2601	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2602	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2603	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2611	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2612	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2613	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2614	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q2615	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R001	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R002	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R003	1-250-543-11	o	RES,METAL FILM CHIP 100K(1005)
R004	1-250-523-11	o	RES, METAL FILM CHIP 15K(1005)
R005	1-250-535-11	s	RES, METAL FILM CHIP 47K(1005)
R006	1-250-519-11	s	RES, METAL FILM CHIP 10K(1005)
R007	1-250-471-11	s	RES, METAL FILM CHIP 100(1005)
R008	1-250-531-11	s	RES, METAL FILM CHIP 33K(1005)
R009	1-250-519-11	s	RES, METAL FILM CHIP 10K(1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R010	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R011	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R012	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R013	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R014	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R015	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R016	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R017	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R018	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R019	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R020	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R021	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R022	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R023	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R024	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R025	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R026	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R027	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R028	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R029	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R030	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R031	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R032	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R033	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R034	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R035	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R038	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R039	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R040	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R041	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R042	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R043	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R044	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R045	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R049	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R050	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R051	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R052	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R053	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R054	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R055	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R056	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R057	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R058	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R059	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R060	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R061	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R062	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R063	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R064	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R065	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R066	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R067	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R068	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R069	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R070	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R071	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R072	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R073	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R074	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R075	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R076	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R077	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R078	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R079	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R080	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R081	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R082	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R083	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R084	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R085	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R086	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R087	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R089	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R090	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R091	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R092	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R093	1-208-895-81 s	RES, CHIP 2.2K (1005)
R094	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R095	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R096	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R097	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R098	1-208-871-81 s	RES, CHIP 220 (1005)
R099	1-208-871-81 s	RES, CHIP 220 (1005)
R100	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R101	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R102	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R103	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R104	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R106	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R107	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R108	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R109	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R110	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R111	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R112	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R113	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R114	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R115	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R117	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R118	⚠ 1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R119	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R120	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R121	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R122	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R123	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R124	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R125	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R127	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R128	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R129	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R130	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R131	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R132	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R133	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R135	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R136	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R137	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R138	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R139	1-208-911-81 s	RES, CHIP 10K (1005)
R140	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R141	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R142	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R143	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R144	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R145	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R146	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R148	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R149	1-208-939-81 s	RES, CHIP 150K (1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R150	1-208-919-81 s	RES, CHIP 22K (1005)
R151	1-208-911-81 s	RES, CHIP 10K (1005)
R152	1-208-887-81 s	RES, CHIP 1.0K (1005)
R153	1-220-870-81 s	RES, CHIP 10 (1005)
R154	1-208-863-81 s	RES, CHIP 100 (1005)
R155	1-208-935-81 s	RES, CHIP 100K (1005)
R156	1-208-923-81 s	RES, CHIP 33K (1005)
R157	1-208-903-81 s	RES, CHIP 4.7K (1005)
R158	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R159	1-208-927-81 s	RES, CHIP 47K (1005)
R160	1-208-927-81 s	RES, CHIP 47K (1005)
R161	1-208-927-81 s	RES, CHIP 47K (1005)
R200	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R201	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R202	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R203	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R204	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R205	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R206	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R207	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R210	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R211	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R212	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R213	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R214	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R215	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R216	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R217	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R219	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R300	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R301	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R302	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R303	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R304	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R305	1-250-468-11 s	RES, METAL FILM CHIP 75 (1005)
R306	1-211-986-91 s	RES, CHIP 51 (1608)
R307	1-211-986-91 s	RES, CHIP 51 (1608)
R308	1-211-986-91 s	RES, CHIP 51 (1608)
R309	1-211-986-91 s	RES, CHIP 51 (1608)
R310	1-211-986-91 s	RES, CHIP 51 (1608)
R311	1-211-986-91 s	RES, CHIP 51 (1608)
R312	1-211-986-91 s	RES, CHIP 51 (1608)
R313	1-211-986-91 s	RES, CHIP 51 (1608)
R314	1-218-823-91 s	RES, CHIP 100 (1608)
R315	1-218-823-91 s	RES, CHIP 100 (1608)
R316	1-218-823-91 s	RES, CHIP 100 (1608)
R317	1-218-823-91 s	RES, CHIP 100 (1608)
R318	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R323	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R324	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R325	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R326	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R327	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R328	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R329	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R330	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R331	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R332	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R333	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R334	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R335	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R336	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R400	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R401	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R402	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R403	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R404	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R405	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R406	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R407	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R408	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R411	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R412	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R413	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R414	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R415	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R416	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R417	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R418	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R419	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R420	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R500	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R501	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R503	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R506	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R507	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R508	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R514	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R515	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R516	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R517	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R518	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R519	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R520	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R521	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R522	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R523	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R524	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R525	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R526	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R527	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R528	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R529	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R530	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R531	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R532	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R533	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R536	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R537	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R538	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R541	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R542	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R546	1-208-875-81 s	RES, CHIP 330 (1005)
R547	1-208-863-81 s	RES, CHIP 100 (1005)
R548	1-208-875-81 s	RES, CHIP 330 (1005)
R549	1-208-891-81 s	RES, CHIP 1.5K (1005)
R550	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R554	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R555	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R556	1-208-875-81 s	RES, CHIP 330 (1005)
R557	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R562	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R563	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R564	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R565	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R566	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R600	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R601	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R602	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R603	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R604	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R606	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R607	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R608	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R609	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R610	1-208-911-81 s	RES, CHIP 10K (1005)
R611	1-208-911-81 s	RES, CHIP 10K (1005)
R612	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R613	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R614	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R615	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R616	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R617	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R618	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R619	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R620	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R621	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R622	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R623	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R625	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R626	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R627	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R628	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R629	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R631	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R632	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R633	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R634	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R635	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R636	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R637	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R639	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R640	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R641	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R642	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R643	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R644	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R645	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R646	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R647	1-250-455-11 s	RES, METAL FILM CHIP 22 (1005)
R648	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R649	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R650	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R651	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R652	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R653	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R654	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R655	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R656	1-208-907-81 s	RES, CHIP 6.8K (1005)
R662	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R663	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R664	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R669	1-208-919-81 s	RES, CHIP 22K (1005)
R670	1-208-895-81 s	RES, CHIP 2.2K (1005)
R671	1-208-911-81 s	RES, CHIP 10K (1005)
R672	1-208-919-81 s	RES, CHIP 22K (1005)
R673	1-208-915-81 s	RES, CHIP 15K (1005)
R674	1-208-919-81 s	RES, CHIP 22K (1005)
R675	1-208-947-81 s	RES, CHIP 330K (1005)
R676	1-208-899-81 s	RES, CHIP 3.3K (1005)
R677	1-208-907-81 s	RES, CHIP 6.8K (1005)
R679	1-208-863-81 s	RES, CHIP 100 (1005)
R680	1-208-911-81 s	RES, CHIP 10K (1005)
R681	1-208-863-81 s	RES, CHIP 100 (1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R682	1-208-903-81 s	RES, CHIP 4.7K (1005)
R683	1-208-895-81 s	RES, CHIP 2.2K (1005)
R684	1-208-915-81 s	RES, CHIP 15K (1005)
R685	1-208-919-81 s	RES, CHIP 22K (1005)
R686	1-208-947-81 s	RES, CHIP 330K (1005)
R687	1-208-899-81 s	RES, CHIP 3.3K (1005)
R688	1-208-863-81 s	RES, CHIP 100 (1005)
R689	1-208-911-81 s	RES, CHIP 10K (1005)
R690	1-208-863-81 s	RES, CHIP 100 (1005)
R691	1-208-903-81 s	RES, CHIP 4.7K (1005)
R692	1-208-887-81 s	RES, CHIP 1.0K (1005)
R694	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R695	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R696	1-208-919-81 s	RES, CHIP 22K (1005)
R697	1-208-895-81 s	RES, CHIP 2.2K (1005)
R698	1-208-911-81 s	RES, CHIP 10K (1005)
R699	1-208-919-81 s	RES, CHIP 22K (1005)
R700	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R701	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R702	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R703	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R706	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R708	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R709	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R710	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R711	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R712	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R713	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R714	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R715	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R716	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R717	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R718	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R719	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R720	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R721	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R722	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R723	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R724	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R725	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R727	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R728	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R729	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R730	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R731	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R733	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R734	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R800	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R801	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R802	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R804	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R805	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R806	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R807	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R809	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R810	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R811	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R812	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R813	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R814	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R815	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R816	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R818	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R819	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R820	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R821	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R822	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R823	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R824	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R831	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R832	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R833	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R834	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R835	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R836	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R837	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R838	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R839	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R840	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R900	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R901	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R902	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R903	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R904	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R905	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R906	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R907	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R908	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R910	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R911	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R912	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R914	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R915	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R916	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R917	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R918	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R919	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R920	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R921	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R922	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R923	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R924	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R925	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R926	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R928	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R929	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R930	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R931	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R932	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R933	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R934	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R935	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R936	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R937	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R938	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R939	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R940	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R941	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R942	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R943	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R944	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R945	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R946	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R947	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R948	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R949	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R950	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R951	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R952	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R953	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R954	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R955	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R956	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R957	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R958	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R959	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R960	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R961	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R962	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R963	1-220-242-91 s	RES, SQUARE TYPE CHIP 22(3225)
R964	1-220-242-91 s	RES, SQUARE TYPE CHIP 22(3225)
R965	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R966	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R967	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R968	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R969	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R970	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R971	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R972	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R973	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R974	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R975	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R976	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R977	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R978	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R979	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R980	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R981	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R982	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R983	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R984	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R985	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R986	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R987	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R988	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R989	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R990	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R991	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R992	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R993	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R994	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R995	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R996	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R997	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R998	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R999	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1000	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R1001	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1002	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1003	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1004	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1005	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1006	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1050	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1051	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R1052	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1053	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1054	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R1055	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1056	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1057	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1058	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1059	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1061	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1062	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
R2609	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2610	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2611	1-250-491-11 o	RES, METAL FILM CHIP 680 (1005)
R2612	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2614	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2615	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2616	1-250-499-11 o	RES, METAL FILM CHIP 1.5K (1005)
R2617	1-250-499-11 o	RES, METAL FILM CHIP 1.5K (1005)
R2618	1-250-499-11 o	RES, METAL FILM CHIP 1.5K (1005)
R2619	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2620	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2621	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2622	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2623	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R2624	1-250-479-11 o	RES, METAL FILM CHIP 220 (1005)
R2625	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2628	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2634	1-250-543-11 o	RES, METAL FILM CHIP 100K (1005)
R2635	1-250-503-11 o	RES, METAL FILM CHIP 2.2K (1005)
R2636	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2637	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2639	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2640	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2641	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2644	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2647	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2648	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2651	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2652	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2653	1-250-475-11 s	RES, METAL FILM CHIP 150 (1005)
R2654	1-250-475-11 s	RES, METAL FILM CHIP 150 (1005)
R2655	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2656	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R2658	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2661	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2662	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2663	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2664	1-250-515-11 s	RES, METAL FILM CHIP 6.8K (1005)
R2665	1-250-515-11 s	RES, METAL FILM CHIP 6.8K (1005)
R2666	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R2667	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R2668	1-216-797-91 s	RES, CHIP 10 (1608)
R2669	1-216-797-91 s	RES, CHIP 10 (1608)
R2670	1-250-495-11 s	RES, METAL FILM CHIP 1.0K (1005)
R2671	1-250-475-11 s	RES, METAL FILM CHIP 150 (1005)
R2672	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2673	1-250-507-11 o	RES, METAL FILM CHIP 3.3K (1005)
R2674	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2675	1-250-519-11 s	RES, METAL FILM CHIP 10K (1005)
R2676	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2677	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2678	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2679	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2680	1-250-543-11 o	RES, METAL FILM CHIP 100K (1005)
R2681	1-250-511-11 o	RES, METAL FILM CHIP 4.7K (1005)
R2682	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R2704	1-250-471-11 s	RES, METAL FILM CHIP 100 (1005)
R2705	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2706	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB100	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB101	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB102	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB103	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB104	1-234-372-21 s	RES, NETWORK 100 (1005X4)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
RB105	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB106	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB107	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB108	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB109	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB110	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB111	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB112	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB113	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB114	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB115	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB116	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB117	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB118	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB119	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB120	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB121	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB122	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB200	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB201	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB202	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB203	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB204	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB205	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB206	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB207	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB300	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB301	1-234-380-21 s	RES, NETWORK 47K (1005X4)
RB302	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB303	1-234-369-21 s	RES, NETWORK 10 (1005X4)
RB400	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB401	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB402	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB405	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB406	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB407	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB408	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB409	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB410	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB411	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB412	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB413	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB414	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB415	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB416	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB417	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB418	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB419	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB420	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB421	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB422	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB424	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB425	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB430	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB431	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB432	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB433	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB434	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB435	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB436	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB437	1-234-381-21 s	RES, NETWORK 100K (1005X4)
RB438	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB439	1-234-373-21 s	RES, NETWORK 220 (1005X4)

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP	Description		
RB1622	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1623	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1624	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1625	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1626	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1627	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1628	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1629	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1630	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1631	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1632	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1633	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1634	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1635	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1636	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1637	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1638	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1639	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1640	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1641	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1642	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1643	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1644	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1645	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1646	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1647	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1700	1-234-370-21	s	RES, NETWORK 22 (1005X4)		
RB1701	1-234-370-21	s	RES, NETWORK 22 (1005X4)		
RB1702	1-234-370-21	s	RES, NETWORK 22 (1005X4)		
RB1703	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1704	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB1800	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB1900	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1901	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1902	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1903	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1904	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1905	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1906	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1907	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1908	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1909	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1910	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1911	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1912	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1913	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1914	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1915	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1916	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1917	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1918	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1919	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB1920	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB2050	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB2051	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2052	1-234-378-21	s	RES, NETWORK 10K (1005X4)		
RB2053	1-234-378-21	s	RES, NETWORK 10K (1005X4)		
RB2200	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2201	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2207	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2208	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2209	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB2210	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2211	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2212	1-234-373-21	s	RES, NETWORK 220 (1005X4)		

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP	Description		
RB2213	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2214	1-234-381-21	s	RES, NETWORK 100K (1005X4)		
RB2215	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2216	1-234-381-21	s	RES, NETWORK 100K (1005X4)		
RB2217	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2218	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2300	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2301	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2302	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2303	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2304	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2305	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2306	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2307	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2308	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2450	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2451	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2452	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2453	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2454	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2455	1-234-372-21	s	RES, NETWORK 100 (1005X4)		
RB2600	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2601	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2602	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2702	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2703	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB2704	1-234-373-21	s	RES, NETWORK 220 (1005X4)		
RB2706	1-234-371-21	s	RES, NETWORK 47 (1005X4)		
RB2707	1-234-370-21	s	RES, NETWORK 22 (1005X4)		
RB2708	1-234-370-21	s	RES, NETWORK 22 (1005X4)		
RV1050	1-225-792-21	s	RES, ADJ, CERMET 10K		
RV1051	1-225-792-21	s	RES, ADJ, CERMET 10K		
RY1050	1-755-380-21	s	RELAY		
RY1400	1-755-380-21	s	RELAY		
S100	1-692-270-41	s	SWITCH, SLIDE		
T300	1-437-527-41	s	TRANSFORMER, PULSE		
THP001	△ 1-803-615-21	s	THERMISTOR, POSITIVE		
THP002	△ 1-802-063-21	s	THERMISTOR, POSITIVE		
THP003	△ 1-803-353-21	s	THERMISTOR, POSITIVE		
THP004	△ 1-803-353-21	s	THERMISTOR, POSITIVE		
THP005	△ 1-803-615-21	s	THERMISTOR, POSITIVE		
THP006	△ 1-803-353-21	s	THERMISTOR, POSITIVE		
THP007	△ 1-803-353-21	s	THERMISTOR, POSITIVE		
THP008	△ 1-803-353-21	s	THERMISTOR, POSITIVE		
THP010	△ 1-803-615-21	s	THERMISTOR, POSITIVE		
THP011	△ 1-803-615-21	s	THERMISTOR, POSITIVE		
THP200	△ 1-771-845-21	s	THERMISTOR, POSITIVE		
THP260	△ 1-805-725-11	s	THERMISTOR, POSITIVE		
THP261	△ 1-803-353-21	s	THERMISTOR, POSITIVE		
THP270	△ 1-805-725-11	s	THERMISTOR, POSITIVE		
THP272	△ 1-802-243-11	s	THERMISTOR, POSITIVE		
THP400	△ 1-803-615-21	s	THERMISTOR, POSITIVE		
TP100	1-535-877-22	s	CHIP, CHECKER		
TP500	1-535-877-22	s	CHIP, CHECKER		
TP600	1-535-877-22	s	CHIP, CHECKER		
TP601	1-535-877-22	s	CHIP, CHECKER		
TP700	1-535-877-22	s	CHIP, CHECKER		
TP701	1-535-877-22	s	CHIP, CHECKER		
TP702	1-535-877-22	s	CHIP, CHECKER		
TP800	1-535-877-22	s	CHIP, CHECKER		
TP801	1-535-877-22	s	CHIP, CHECKER		

DPR-361 BOARD [SUFFIX -11, 12]

Ref. No. or Q'ty	Part No.	SP Description
TP802	1-535-877-22 s	CHIP, CHECKER
TP803	1-535-877-22 s	CHIP, CHECKER
TP1050	1-535-877-22 s	CHIP, CHECKER
TP1051	1-535-877-22 s	CHIP, CHECKER
TP1406	1-780-925-11 s	TERMINAL, LUG
TP1407	1-780-408-11 o	TERMINAL, LUG
TP1408	1-780-925-11 s	TERMINAL, LUG
TP1409	1-780-925-11 s	TERMINAL, LUG
TP1410	1-780-925-11 s	TERMINAL, LUG
TP1700	1-535-877-22 s	CHIP, CHECKER
TP1701	1-535-877-22 s	CHIP, CHECKER
TP2200	1-535-877-22 s	CHIP, CHECKER
TP2300	1-535-877-22 s	CHIP, CHECKER
TP2301	1-535-877-22 s	CHIP, CHECKER
TP2302	1-535-877-22 s	CHIP, CHECKER
TP2450	1-535-877-22 s	CHIP, CHECKER
TP2451	1-535-877-22 s	CHIP, CHECKER
TP2452	1-535-877-22 s	CHIP, CHECKER
TP2600	1-535-877-22 s	CHIP, CHECKER
TP2601	1-535-877-22 s	CHIP, CHECKER
TP2602	1-535-877-22 s	CHIP, CHECKER
X100	1-814-011-11 s	OSCILLATOR, CRYSTAL (33.1776MHZ)
X300	1-795-983-11 s	OSCILLATOR, CRYSTAL
X600	1-795-670-12 s	OSCILLATOR, CRYSTAL (VCXO) 3.3V
X601	1-795-764-12 s	OSCILLATOR, CRYSTAL (VCXO) 5V
X602	1-795-671-12 s	OSCILLATOR, CRYSTAL (VCXO) 3.3V
X700	1-813-253-12 s	OSCILLATOR, CRYSTAL (VCXO) 5V

ENC-112 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C100	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C101	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C103	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C106	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C109	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C112	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C115	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C119	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C124	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C129	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)

ENC-112 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C130	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C132	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C133	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C135	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C136	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C138	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C139	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C141	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C142	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C144	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C145	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C147	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C148	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C150	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C151	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C163	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C168	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C169	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C170	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C171	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
D100	6-502-197-01 s	DI SML-D12M8WT86SM
D101	6-502-197-01 s	DI SML-D12M8WT86SM
D102	6-502-197-01 s	DI SML-D12M8WT86SM
FB100	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB101	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB102	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
IC100	8-753-276-37 o	IC CXD3195AGG-T6
IC101	6-717-596-01 s	IC FMS4B32LBH-60AER
IC102	6-717-596-01 s	IC FMS4B32LBH-60AER
R100	1-220-878-81 s	RES, CHIP 22 (1005)
R101	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R102	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R103	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R104	1-220-878-81 s	RES, CHIP 22 (1005)
R105	1-220-878-81 s	RES, CHIP 22 (1005)
R106	1-208-911-81 s	RES, CHIP 10K (1005)
R107	1-220-878-81 s	RES, CHIP 22 (1005)
R108	1-208-911-81 s	RES, CHIP 10K (1005)
R109	1-208-911-81 s	RES, CHIP 10K (1005)
R110	1-208-911-81 s	RES, CHIP 10K (1005)
R111	1-208-911-81 s	RES, CHIP 10K (1005)
R112	1-218-990-81 s	CONDUCTOR, CHIP (1005)

ENC-112 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R113	1-208-887-81 s	RES, CHIP 1.0K (1005)
R114	1-208-887-81 s	RES, CHIP 1.0K (1005)
R115	1-208-911-81 s	RES, CHIP 10K (1005)
R118	1-220-878-81 s	RES, CHIP 22 (1005)
R119	1-220-878-81 s	RES, CHIP 22 (1005)
R120	1-220-878-81 s	RES, CHIP 22 (1005)
R121	1-220-878-81 s	RES, CHIP 22 (1005)
RB101	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB102	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB103	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB105	1-234-376-21 s	RES, NETWORK 2.2K (1005X4)
RB108	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB109	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB110	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB111	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB112	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB113	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB114	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB115	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB116	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB117	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB118	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB119	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB120	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB121	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB122	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB123	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB124	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB125	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB126	1-234-370-21 s	RES, NETWORK 22 (1005X4)

FL-378 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-720-A s	MOUNTED CIRCUIT BOARD, FL-378
C003	△ 1-116-010-11 s	CAP, METALIZED PE FILM 0.022MF
C004	△ 1-116-010-11 s	CAP, METALIZED PE FILM 0.022MF
C005	△ 1-116-012-11 s	CAP, METALIZED PE FILM 0.1MF
C011	△ 1-136-191-11 s	CAP, METALIZED FILM 0.22MF
C013	△ 1-116-012-11 s	CAP, METALIZED PE FILM 0.1MF
C021	△ 1-113-925-51 s	CAP, CERAMIC 10000PF F
C022	△ 1-113-925-51 s	CAP, CERAMIC 10000PF F
C038	1-136-191-11 s	CAP, METALIZED FILM 0.22MF
CN001	△ 1-691-291-11 o	PIN, CONNECTOR (PC BOARD) 5P
CN002	1-750-880-11 s	RECEPTACLE, COAXIAL CONNECTOR
CN003	△ 1-691-960-11 o	PIN, CONNECTOR (PC BOARD) 3P
FB002	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB003	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB004	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB005	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB011	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB013	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB014	1-469-979-21 s	INDUCTOR, FERRITE BEAD
L001	1-410-283-11 s	INDUCTOR (WITH CORE)
L002	1-410-283-11 s	INDUCTOR (WITH CORE)
L003	1-416-831-11 s	COIL, CHOKE 100UH
L004	1-416-831-11 s	COIL, CHOKE 100UH
L005	1-416-831-11 s	COIL, CHOKE 100UH

FL-378 BOARD

Ref. No. or Q'ty	Part No.	SP Description
L011	1-416-831-11 s	COIL, CHOKE 100UH
L013	1-416-831-11 s	COIL, CHOKE 100UH
L014	1-416-831-11 s	COIL, CHOKE 100UH
L021	1-481-601-21 s	INDUCTOR, CHIP 100UH
L022	1-481-601-21 s	INDUCTOR, CHIP 100UH
TP001	1-780-925-11 s	TERMINAL, LUG
TP002	1-780-925-11 s	TERMINAL, LUG
TP003	1-780-925-11 s	TERMINAL, LUG

FL-379 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-721-A s	MOUNTED CIRCUIT BOARD, FL-379
CN001	△ 1-691-960-11 o	PIN, CONNECTOR (PC BOARD) 3P
CN002	△ 1-691-291-11 o	PIN, CONNECTOR (PC BOARD) 5P
TP001	1-780-925-11 s	TERMINAL, LUG
TP002	1-780-925-11 s	TERMINAL, LUG

LED-525 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-726-A s	MOUNTED CIRCUIT BOARD, LED-525
D002	6-503-067-03 s	DI LF-3011MKN
D003	6-503-067-03 s	DI LF-3011MKN
D004	6-503-067-03 s	DI LF-3011MKN
D005	6-503-067-03 s	DI LF-3011MKN
D006	6-503-067-03 s	DI LF-3011MKN
D0011	6-503-067-03 s	DI LF-3011MKN

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1947-741-A s	MOUNTED CIRCUIT BOARD, PS-739D
6pcs	1-481-203-11 s	BEAD, FERRITE (HF57BB 2.85)
2pcs	△ 4-139-518-01 s	SHEET, RADIATION(LV)
1pc	4-153-406-16 s	TUBE (DIA. 12.5 L22)
13pcs	4-382-854-01 s	SCREW (M3X8), P, SW (+)
8.4pcs	7-600-000-48 s	ADHESIVE AGENT(SC608LVZ2)180ML
4pcs	7-685-648-91 s	SCREW +BVTP 3X12 TYPE2 TT(B)
1pc	7-688-003-11 s	W 3, MIDDLE
C1	△ 1-114-594-21 s	CAP, PP FILM (ACROSS) 0.22MF
C2	△ 1-113-907-51 s	CAP, CERAMIC 2200PF E
C3	△ 1-113-907-51 s	CAP, CERAMIC 2200PF E
C4	△ 1-114-594-21 s	CAP, PP FILM (ACROSS) 0.22MF
C5	1-112-024-21 s	CAP,METALIZED PE FILM 1MF
C6	1-112-317-11 s	CAP, CHIP CERAMIC 0.1MF (2012)
C7	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C8	△ 1-112-912-11 s	CAP, ELECT 10MF
C10	1-112-808-11 s	CAP, ELECT 220MF
C11	1-114-330-11 s	CAP, CERAMIC 2.2MF X7R 2012
C12	1-165-585-21 s	CAP, CHIP ELECT 47MF
C13	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
C14	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C15	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C16	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C17	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C19	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C20	1-118-119-91 s	CAP, CHIP CERAMIC 0.47MF 3216
C22	1-116-857-91 s	CAP, CERAMIC 0.22MF B (2012)
C23	1-162-964-91 s	CAP,CHIP CERAMIC 1000PF B 1608
C24	1-112-066-11 s	CAP, CERAMIC 10MF X7R 3216
C25	1-116-159-11 s	CAP,METALIZED PE FILM 4.7MF
C26	1-100-312-91 s	CAP, METALIZED PP FILM 39000PF
C27	1-100-312-91 s	CAP, METALIZED PP FILM 39000PF
C28	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C29	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C32	1-112-795-11 s	CAP, ELECT 22MF
C33	1-112-808-11 s	CAP, ELECT 220MF
C34	1-114-918-11 s	CAP, CERAMIC 470PF U2J (3216)
C35	△ 1-113-900-51 s	CAP, CERAMIC 470PF B
C36	1-112-066-11 s	CAP, CERAMIC 10MF X7R 3216
C207	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C208	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C209	1-114-329-11 s	CAP, CERAMIC 0.47MF X7R 2012
C211	1-112-317-11 s	CAP, CHIP CERAMIC 0.1MF (2012)
C213	1-118-119-91 s	CAP, CHIP CERAMIC 0.47MF 3216
C214	1-162-964-91 s	CAP,CHIP CERAMIC 1000PF B 1608
C215	1-112-066-11 s	CAP, CERAMIC 10MF X7R 3216
C216	1-116-159-11 s	CAP,METALIZED PE FILM 4.7MF
C217	1-100-312-91 s	CAP, METALIZED PP FILM 39000PF
C218	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C226	1-114-918-11 s	CAP, CERAMIC 470PF U2J (3216)
C227	1-112-066-11 s	CAP, CERAMIC 10MF X7R 3216
C229	△ 1-113-900-51 s	CAP, CERAMIC 470PF B
C1001	1-107-923-91 s	CAP, ELECT 330MF
C1003	1-114-579-11 s	CAP, CERAMIC 220PF U2J (3216)
C1004	1-112-808-11 s	CAP, ELECT 220MF
C1005	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C1006	1-116-165-11 s	CAP, ELECT 11000MF
C1008	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C1009	1-116-165-11 s	CAP, ELECT 11000MF
C1010	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1011	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1012	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C1013	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C1015	1-127-715-91 s	CAP,CHIP CERAMIC 0.22MF B 1608
C1017	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1018	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C1022	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1025	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C1026	1-112-317-11 s	CAP, CHIP CERAMIC 0.1MF (2012)
C1028	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C1030	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1032	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C1037	1-118-119-91 s	CAP, CHIP CERAMIC 0.47MF 3216
C1039	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1040	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1041	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1042	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1046	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C1048	1-162-964-91 s	CAP,CHIP CERAMIC 1000PF B 1608
C1052	1-112-317-11 s	CAP, CHIP CERAMIC 0.1MF (2012)
C2002	1-114-579-11 s	CAP, CERAMIC 220PF U2J (3216)
C2003	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C2004	1-165-758-21 s	CAP, ELECT 470MF 105
C2005	1-112-808-11 s	CAP, ELECT 220MF

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
C2006	1-118-164-11 s	CAP, CERAMIC 0.22MF X7R (5750)
C2007	1-114-221-21 s	CAP, ELECT 800MF
C2008	1-114-221-21 s	CAP, ELECT 800MF
C2010	1-165-758-21 s	CAP, ELECT 470MF 105
C2011	1-127-715-91 s	CAP,CHIP CERAMIC 0.22MF B 1608
C2012	1-112-807-11 s	CAP, ELECT 100MF
C2013	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2014	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2015	1-127-715-91 s	CAP,CHIP CERAMIC 0.22MF B 1608
C2016	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C2017	1-127-715-91 s	CAP,CHIP CERAMIC 0.22MF B 1608
C2018	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C2019	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C2020	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2021	1-100-758-21 s	CAP, CHIP CERAMIC 47000PF 3216
C2022	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C2023	1-118-164-11 s	CAP, CERAMIC 0.22MF X7R (5750)
C2024	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C2025	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C2026	1-162-964-91 s	CAP,CHIP CERAMIC 1000PF B 1608
C2027	1-100-996-21 s	CAP, CERAMIC 0.1MF X7R (3216)
C2028	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2029	1-162-964-91 s	CAP,CHIP CERAMIC 1000PF B 1608
C2030	1-114-160-91 s	CAP, CHIP CERAMIC 1MF B 3225
C2032	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C2033	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C2036	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2037	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C2039	1-114-507-11 s	CAP, CERAMIC 1UF X7R
C2040	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2041	1-114-920-21 s	CAP, CERAMIC 0.47MF X7R (4532)
C2042	1-100-761-21 s	CAP, CHIP CERAMIC 10000PF 2012
C2043	1-100-761-21 s	CAP, CHIP CERAMIC 10000PF 2012
C2044	1-114-920-21 s	CAP, CERAMIC 0.47MF X7R (4532)
C2045	1-112-912-11 s	CAP, ELECT 10MF
C2046	1-136-203-11 s	CAP, METALIZED FILM 0.01MF
C2047	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2048	1-136-203-11 s	CAP, METALIZED FILM 0.01MF
C2049	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2051	1-136-203-11 s	CAP, METALIZED FILM 0.01MF
C2052	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2053	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2054	1-136-203-11 s	CAP, METALIZED FILM 0.01MF
C2055	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2056	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2057	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2058	1-112-912-11 s	CAP, ELECT 10MF
C2059	1-136-206-11 s	CAP, METALIZED FILM 0.033MF
C2060	1-100-761-21 s	CAP, CHIP CERAMIC 10000PF 2012
C2061	1-100-597-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C2063	1-112-298-91 s	CAP, CERAMIC 1MF B (1608)
C2064	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2065	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2066	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2069	1-162-970-91 s	CAP, CERAMIC 0.01MF B 1608
C2070	1-162-964-91 s	CAP,CHIP CERAMIC 1000PF B 1608
C2071	1-100-996-21 s	CAP, CERAMIC 0.1MF X7R (3216)
CN1	△ 1-691-960-11 o	PIN, CONNECTOR (PC BOARD) 3P
CN1004	1-770-468-21 s	PIN, CONNECTOR (PC BOARD) 10P
CN2002	1-691-960-11 o	PIN, CONNECTOR (PC BOARD) 3P
D1	△ 6-500-406-01 s	DIODE D10XB80
D2	△ 6-500-839-01 s	DIODE D1UBA80
D3	8-719-056-48 s	DI 1SS388
D4	8-719-083-66 s	DI UDZSUSTE-1718B

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
D5	8-719-083-66 s	DI UDZSUSTE-1718B
D6	8-719-083-60 s	DI UDZSUSTE-174.7B
D7	8-719-083-82 s	DI UDZSUSTE-1712B
D8	8-719-069-60 s	DI UDZSUSTE-179.1B
D9	8-719-069-61 s	DI UDZSUSTE-1710B
D10	8-719-069-28 s	DI 1SS400FJTE61
D11	8-719-055-30 s	DIODE D1FS4A-TA
D12	8-719-056-48 s	DI 1SS388
D13	8-719-056-48 s	DI 1SS388
D14	8-719-069-28 s	DI 1SS400FJTE61
D15	8-719-083-66 s	DI UDZSUSTE-1718B
D17	8-719-056-48 s	DI 1SS388
D18	8-719-056-48 s	DI 1SS388
D19	8-719-056-48 s	DI 1SS388
D20	6-502-606-01 s	DI CSD2V10LFB2
D21	6-502-606-01 s	DI CSD2V10LFB2
D22	6-502-606-01 s	DI CSD2V10LFB2
D23	8-719-055-30 s	DIODE D1FS4A-TA
D24	8-719-083-66 s	DI UDZSUSTE-1718B
D25	6-503-931-01 s	DI M1FL40U
D26	8-719-083-71 s	DI UDZSUSTE-1730B
D27	8-719-069-61 s	DI UDZSUSTE-1710B
D28	8-719-069-28 s	DI 1SS400FJTE61
D29	8-719-069-28 s	DI 1SS400FJTE61
D30	8-719-069-28 s	DI 1SS400FJTE61
D31	8-719-056-48 s	DI 1SS388
D32	6-501-439-01 s	DIODE ST02D-170F2
D33	8-719-083-66 s	DI UDZSUSTE-1718B
D34	6-502-767-01 s	DI ST03-240F1
D206	8-719-083-66 s	DI UDZSUSTE-1718B
D208	8-719-056-48 s	DI 1SS388
D209	6-501-439-01 s	DIODE ST02D-170F2
D210	8-719-069-28 s	DI 1SS400FJTE61
D211	6-502-767-01 s	DI ST03-240F1
D212	8-719-055-30 s	DIODE D1FS4A-TA
D213	8-719-083-66 s	DI UDZSUSTE-1718B
D214	8-719-055-30 s	DIODE D1FS4A-TA
D217	6-502-606-01 s	DI CSD2V10LFB2
D218	6-502-606-01 s	DI CSD2V10LFB2
D219	6-502-606-01 s	DI CSD2V10LFB2
D220	6-502-606-01 s	DI CSD2V10LFB2
D221	6-502-606-01 s	DI CSD2V10LFB2
D222	8-719-083-66 s	DI UDZSUSTE-1718B
D223	8-719-027-63 s	DIODE D2FL20U-TA
D1001	6-503-931-01 s	DI M1FL40U
D1003	8-719-027-63 s	DIODE D2FL20U-TA
D1004	8-719-027-63 s	DIODE D2FL20U-TA
D1005	8-719-027-63 s	DIODE D2FL20U-TA
D1006	8-719-069-28 s	DI 1SS400FJTE61
D1007	8-719-069-61 s	DI UDZSUSTE-1710B
D1008	8-719-069-59 s	DI UDZSUSTE-178.2B
D1009	8-719-069-28 s	DI 1SS400FJTE61
D1011	6-500-696-01 s	DI UDZSUSTE-173.0B
D1013	8-719-069-61 s	DI UDZSUSTE-1710B
D2001	6-501-554-01 s	DIODE MUR880EG
D2002	8-719-027-63 s	DIODE D2FL20U-TA
D2003	8-719-027-63 s	DIODE D2FL20U-TA
D2004	6-502-529-01 s	DI RD51FM-T1-AY
D2005	6-502-254-01 s	DI KDZTR6.8B
D2006	8-719-083-82 s	DI UDZSUSTE-1712B
D2007	8-719-083-82 s	DI UDZSUSTE-1712B
D2008	8-719-069-28 s	DI 1SS400FJTE61
D2009	8-719-069-28 s	DI 1SS400FJTE61
D2010	8-719-083-66 s	DI UDZSUSTE-1718B
D2012	6-502-529-01 s	DI RD51FM-T1-AY

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
D2013	6-502-529-01 s	DI RD51FM-T1-AY
D2014	8-719-069-55 s	DI UDZSUSTE-175.6B
D2015	8-719-069-55 s	DI UDZSUSTE-175.6B
D2016	8-719-069-28 s	DI 1SS400FJTE61
D2017	8-719-083-82 s	DI UDZSUSTE-1712B
D2018	8-719-083-66 s	DI UDZSUSTE-1718B
D2019	8-719-083-66 s	DI UDZSUSTE-1718B
D2020	8-719-074-31 s	DIODE CL-196YG-CD-T
D2021	8-719-069-55 s	DI UDZSUSTE-175.6B
D2022	8-719-069-28 s	DI 1SS400FJTE61
D2023	8-719-083-66 s	DI UDZSUSTE-1718B
D2024	8-719-083-66 s	DI UDZSUSTE-1718B
D2027	8-719-027-63 s	DIODE D2FL20U-TA
D2028	8-719-027-63 s	DIODE D2FL20U-TA
D2029	8-719-069-55 s	DI UDZSUSTE-175.6B
D2030	8-719-069-28 s	DI 1SS400FJTE61
D2031	8-719-069-55 s	DI UDZSUSTE-175.6B
D2032	8-719-069-28 s	DI 1SS400FJTE61
D2035	8-719-069-28 s	DI 1SS400FJTE61
D2038	8-719-069-28 s	DI 1SS400FJTE61
D2039	8-719-069-28 s	DI 1SS400FJTE61
D2040	6-501-554-01 s	DIODE MUR880EG
D2041	8-719-069-61 s	DI UDZSUSTE-1710B
F1	△ 1-523-066-11 s	FUSE (TIME-LAG TYPE) 10A (10A/250V)
FB1003	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB1004	1-414-581-21 s	FERRITE, EMI (SMD) (4516)
FB2001	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB2002	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB2003	1-469-979-21 s	INDUCTOR, FERRITE BEAD
FB2004	1-469-979-21 s	INDUCTOR, FERRITE BEAD
IC2	8-759-338-95 s	IC NJM2903V (TE2)
IC3	8-759-156-66 s	IC UPC842G2-E2
IC5	6-709-192-01 s	IC FA5501AN-D1-TE1
IC6	6-711-947-01 s	IC MM1431CURE
IC7	8-759-681-48 s	IC NJM317DL1
IC201	8-759-156-66 s	IC UPC842G2-E2
IC203	6-709-192-01 s	IC FA5501AN-D1-TE1
IC204	6-711-947-01 s	IC MM1431CURE
IC1002	6-711-947-01 s	IC MM1431CURE
IC1003	8-759-338-95 s	IC NJM2903V (TE2)
IC1004	8-759-337-40 s	IC NJM2904V (TE2)
IC1005	6-701-652-01 s	IC MAX4374TEUB+TG069
IC1008	8-759-337-40 s	IC NJM2904V (TE2)
IC2001	8-759-681-48 s	IC NJM317DL1
IC2002	6-701-652-01 s	IC MAX4374TEUB+TG069
IC2003	8-759-338-95 s	IC NJM2903V (TE2)
IC2004	6-711-947-01 s	IC MM1431CURE
IC2006	6-701-652-01 s	IC MAX4374TEUB+TG069
IC2007	8-759-337-40 s	IC NJM2904V (TE2)
IC2008	8-759-337-40 s	IC NJM2904V (TE2)
IC2010	6-713-278-01 s	IC MAX4374HEUB+TG069
IC2011	8-759-338-95 s	IC NJM2903V (TE2)
IC2012	6-711-947-01 s	IC MM1431CURE
IC2013	8-759-337-40 s	IC NJM2904V (TE2)
IC2015	8-759-338-95 s	IC NJM2903V (TE2)
L1	△ 1-445-086-11 s	TRANSFORMER, LINE FILTER
L2	△ 1-445-086-11 s	TRANSFORMER, LINE FILTER
L9	△ 1-406-749-11 s	COIL, CHOKE 100
L205	1-406-749-11 s	COIL, CHOKE 100
L1004	1-456-554-21 s	COIL, CHOKE 1.6UH
L1005	1-457-302-21 s	COMMON MODE CHOKE COIL

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
L2001	1-481-602-11 s	BEAD, AMORPHOUS AB-SN 4X2X6SM
L2003	1-456-046-21 s	COIL, CHOKE (SMD) 10UH(10X10)
L2004	1-456-174-11 s	COIL, LINE FILTER
L2005	1-416-831-11 s	COIL, CHOKE 100UH
L2006	1-416-831-11 s	COIL, CHOKE 100UH
L2007	1-416-831-11 s	COIL, CHOKE 100UH
L2008	1-416-831-11 s	COIL, CHOKE 100UH
PH2	△ 8-749-016-82 s	PHOTO COUPLER PC123GY2J00F
PH3	△ 6-600-734-01 s	PHOTO COUPLAR TLP701F (D4-TP.F)
PH201	△ 6-600-734-01 s	PHOTO COUPLAR TLP701F (D4-TP.F)
PH202	△ 8-749-016-82 s	PHOTO COUPLER PC123GY2J00F
PH203	△ 8-749-016-82 s	PHOTO COUPLER PC123GY2J00F
PH204	△ 8-749-016-82 s	PHOTO COUPLER PC123GY2J00F
PH2001	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2002	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2003	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2004	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2005	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2006	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2007	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2009	6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2011	△ 6-600-477-01 s	IC TLP281 (GB-TP,F)
PH2012	6-600-477-01 s	IC TLP281 (GB-TP,F)
Q1	6-552-494-01 s	TR SI2307CDS-T1-GE3
Q2	6-552-642-01 s	TR SI2304DDS-T1-GE3
Q3	6-552-642-01 s	TR SI2304DDS-T1-GE3
Q4	6-553-417-01 s	TR 2SC6127(TE16L1,NV)
Q5	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q7	6-552-067-01 s	TR 2SA2142(TE16L1,NQ)
Q8	6-552-067-01 s	TR 2SA2142(TE16L1,NQ)
Q9	8-729-230-47 s	TRANSISTOR 2SA1162-YG-TE85L
Q10	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q11	8-729-805-35 s	TRANSISTOR 2SB1121-S-TD
Q13	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q14	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q15	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q16	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q17	△ 6-552-066-01 s	TR SPA17N80C3
Q18	8-729-230-47 s	TRANSISTOR 2SA1162-YG-TE85L
Q19	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q201	8-729-805-35 s	TRANSISTOR 2SB1121-S-TD
Q202	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q203	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q204	6-550-631-01 s	TRANSISTOR 2SA1797-T100-Q
Q205	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q206	6-552-066-01 s	TR SPA17N80C3
Q207	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q208	6-552-066-01 s	TR SPA17N80C3
Q1001	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1006	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q1007	8-729-805-35 s	TRANSISTOR 2SB1121-S-TD
Q1010	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q1011	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q2002	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2003	6-552-067-01 s	TR 2SA2142(TE16L1,NQ)
Q2004	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2005	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2006	6-552-067-01 s	TR 2SA2142(TE16L1,NQ)
Q2007	6-552-067-01 s	TR 2SA2142(TE16L1,NQ)
Q2008	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2009	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q2010	6-550-750-01 s	TRANSISTOR SSM3K15FS-TE85L
Q2011	8-729-928-82 s	TRANSISTOR DTC144EE-TL

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
Q2013	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q2014	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2015	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2016	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2017	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2018	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q2019	6-552-251-01 s	TR 2SJ585LS
Q2020	6-553-417-01 s	TR 2SC6127(TE16L1,NV)
Q2021	6-552-251-01 s	TR 2SJ585LS
Q2022	8-729-054-30 s	TRANSISTOR 2SJ585LS-CB11
Q2023	6-553-417-01 s	TR 2SC6127(TE16L1,NV)
Q2025	6-553-417-01 s	TR 2SC6127(TE16L1,NV)
Q2026	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2028	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2029	6-550-632-01 s	TRANSISTOR 2SC4672-T100-Q
Q2030	6-552-067-01 s	TR 2SA2142(TE16L1,NQ)
Q2031	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q2032	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q2033	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q2034	8-729-230-50 s	TRANSISTOR 2SC2712-YG-TE85L
Q2035	6-552-251-01 s	TR 2SJ585LS
Q2036	6-552-251-01 s	TR 2SJ585LS
R1	1-216-837-91 s	RES, CHIP 22K (1608)
R2	1-216-837-91 s	RES, CHIP 22K (1608)
R3	1-208-838-91 s	RES, CHIP 220K (2012)
R4	1-208-838-91 s	RES, CHIP 220K (2012)
R5	1-208-838-91 s	RES, CHIP 220K (2012)
R6	1-208-838-91 s	RES, CHIP 220K (2012)
R7	1-208-838-91 s	RES, CHIP 220K (2012)
R8	1-208-838-91 s	RES, CHIP 220K (2012)
R9	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R11	1-216-837-91 s	RES, CHIP 22K (1608)
R12	1-216-837-91 s	RES, CHIP 22K (1608)
R13	1-216-837-91 s	RES, CHIP 22K (1608)
R14	1-216-837-91 s	RES, CHIP 22K (1608)
R15	1-216-837-91 s	RES, CHIP 22K (1608)
R16	1-216-837-91 s	RES, CHIP 22K (1608)
R17	1-216-837-91 s	RES, CHIP 22K (1608)
R18	1-216-841-91 s	RES, CHIP 47K (1608)
R19	1-216-837-91 s	RES, CHIP 22K (1608)
R20	1-216-837-91 s	RES, CHIP 22K (1608)
R21	1-220-325-91 s	RES,SQUARE TYPE CHIP 1.0M 3225
R22	1-220-325-91 s	RES,SQUARE TYPE CHIP 1.0M 3225
R23	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R24	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R25	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R26	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R27	1-216-837-91 s	RES, CHIP 22K (1608)
R28	1-216-837-91 s	RES, CHIP 22K (1608)
R29	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R30	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R31	1-220-264-91 s	RES,SQUARE TYPE CHIP 1.0K 3225
R32	1-220-264-91 s	RES,SQUARE TYPE CHIP 1.0K 3225
R33	1-216-837-91 s	RES, CHIP 22K (1608)
R34	1-220-321-91 s	RES,SQUARE TYPE CHIP 470K 3225
R35	1-220-321-91 s	RES,SQUARE TYPE CHIP 470K 3225
R36	1-216-837-91 s	RES, CHIP 22K (1608)
R37	1-216-837-91 s	RES, CHIP 22K (1608)
R38	1-216-837-91 s	RES, CHIP 22K (1608)
R39	1-216-837-91 s	RES, CHIP 22K (1608)
R40	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R41	1-216-841-91 s	RES, CHIP 47K (1608)
R44	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R45	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R46	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
R47	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)
R48	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R49	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R50	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R51	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R52	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R53	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R54	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R56	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R57	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R58	1-218-839-91 s	RES, CHIP 470 (1608)
R60	1-216-833-91 s	RES, CHIP 10K (1608)
R61	1-216-833-91 s	RES, CHIP 10K (1608)
R62	1-216-845-91 s	RES, CHIP 100K (1608)
R63	1-216-809-91 s	RES, CHIP 100 (1608)
R64	1-216-845-91 s	RES, CHIP 100K (1608)
R65	1-216-845-91 s	RES, CHIP 100K (1608)
R66	1-216-845-91 s	RES, CHIP 100K (1608)
R67	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R68	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R69	1-216-809-91 s	RES, CHIP 100 (1608)
R70	1-216-845-91 s	RES, CHIP 100K (1608)
R71	1-243-584-31 s	RES, OXIDE METAL FILM 4.7K
R72	1-243-584-31 s	RES, OXIDE METAL FILM 4.7K
R73	1-218-855-91 s	RES, CHIP 2.2K (1608)
R74	1-218-233-91 s	RES, SQUARE TYPE CHIP 47(4532)
R75	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R76	1-218-855-91 s	RES, CHIP 2.2K (1608)
R77	1-216-833-91 s	RES, CHIP 10K (1608)
R78	1-216-833-91 s	RES, CHIP 10K (1608)
R79	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R80	1-220-250-91 s	RES, SQUARE TYPE CHIP 10(4532)
R81	1-218-282-91 s	RES, SQUARE TYPE CHIP 22(4532)
R82	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R83	1-218-867-91 s	RES, CHIP 6.8K (1608)
R84	1-218-867-91 s	RES, CHIP 6.8K (1608)
R85	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R86	1-218-855-91 s	RES, CHIP 2.2K (1608)
R87	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R88	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R89	1-218-831-91 s	RES, CHIP 220 (1608)
R90	1-218-851-91 s	RES, CHIP 1.5K (1608)
R91	1-218-859-91 s	RES, CHIP 3.3K (1608)
R92	1-218-843-91 s	RES, CHIP 680 (1608)
R93	1-243-639-11 s	RES, METAL PLATE 0.1
R94	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R95	1-218-831-91 s	RES, CHIP 220 (1608)
R96	1-216-845-91 s	RES, CHIP 100K (1608)
R97	1-216-833-91 s	RES, CHIP 10K (1608)
R98	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R202	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R204	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R206	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R207	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R208	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R213	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R215	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R219	1-218-839-91 s	RES, CHIP 470 (1608)
R221	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R222	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R227	1-218-233-91 s	RES, SQUARE TYPE CHIP 47(4532)
R228	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R229	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R234	1-215-904-61 s	RES, METAL OXIDE FILM 100K
R235	1-215-904-61 s	RES, METAL OXIDE FILM 100K

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
R236	1-215-904-61 s	RES, METAL OXIDE FILM 100K
R237	1-220-250-91 s	RES, SQUARE TYPE CHIP 10(4532)
R238	1-220-221-91 s	RES,SQUARE TYPE CHIP 100(4532)
R239	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R240	1-220-250-91 s	RES, SQUARE TYPE CHIP 10(4532)
R241	1-220-221-91 s	RES,SQUARE TYPE CHIP 100(4532)
R242	1-243-639-11 s	RES, METAL PLATE 0.1
R246	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R249	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R250	1-243-639-11 s	RES, METAL PLATE 0.1
R258	1-218-867-91 s	RES, CHIP 6.8K (1608)
R259	1-218-867-91 s	RES, CHIP 6.8K (1608)
R260	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R262	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R272	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1002	1-243-584-31 s	RES, OXIDE METAL FILM 4.7K
R1005	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1006	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1009	1-218-859-91 s	RES, CHIP 3.3K (1608)
R1010	1-218-855-91 s	RES, CHIP 2.2K (1608)
R1012	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1013	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1015	1-218-282-91 s	RES, SQUARE TYPE CHIP 22(4532)
R1020	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R1021	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1022	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1023	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1024	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R1025	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R1026	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R1027	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1028	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R1029	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1030	1-219-610-21 s	RES, CHIP (SQUARE TYPE) 0.022
R1031	1-219-610-21 s	RES, CHIP (SQUARE TYPE) 0.022
R1032	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1033	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1034	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R1035	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1036	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1037	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1039	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1040	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1042	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1043	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R1044	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1045	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1046	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1047	1-220-221-91 s	RES,SQUARE TYPE CHIP 100(4532)
R1048	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R1050	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R1051	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1054	1-218-823-91 s	RES, CHIP 100 (1608)
R1056	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1059	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1061	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1070	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R1071	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R1072	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1073	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R1074	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2001	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2002	1-218-859-91 s	RES, CHIP 3.3K (1608)
R2003	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2006	1-218-282-91 s	RES, SQUARE TYPE CHIP 22(4532)

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2009	1-220-221-91 s	RES,SQUARE TYPE CHIP 100(4532)
R2010	1-218-859-91 s	RES, CHIP 3.3K (1608)
R2011	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2012	1-218-843-91 s	RES, CHIP 680 (1608)
R2013	1-218-847-91 s	RES, CHIP 1.0K (1608)
R2014	1-218-831-91 s	RES, CHIP 220 (1608)
R2015	1-218-831-91 s	RES, CHIP 220 (1608)
R2016	1-219-611-21 s	RES, CHIP (SQUARE TYPE) 0.047
R2017	1-220-302-91 s	RES,SQUARE TYPE CHIP 10K(4532)
R2018	1-218-855-91 s	RES, CHIP 2.2K (1608)
R2019	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R2020	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2021	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2022	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2024	1-220-302-91 s	RES,SQUARE TYPE CHIP 10K(4532)
R2025	1-220-302-91 s	RES,SQUARE TYPE CHIP 10K(4532)
R2026	1-220-302-91 s	RES,SQUARE TYPE CHIP 10K(4532)
R2027	1-220-302-91 s	RES,SQUARE TYPE CHIP 10K(4532)
R2028	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2030	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2031	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2032	1-220-293-91 s	RES,SQUARE TYPE CHIP 47K(3225)
R2033	1-219-610-21 s	RES, CHIP (SQUARE TYPE) 0.022
R2034	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R2035	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2036	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2037	1-242-797-21 s	RES, CHIP (SQUARE TYPE) 0.15
R2038	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2040	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R2041	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2042	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2043	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2044	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2045	1-220-336-91 s	RES,SQUARE TYPE CHIP 220K 4532
R2047	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2048	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2049	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2050	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2051	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R2052	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2053	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2054	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2055	1-220-293-91 s	RES,SQUARE TYPE CHIP 47K(3225)
R2058	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2059	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2060	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R2061	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R2062	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R2063	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R2064	1-250-547-11 s	RES,METAL FILM CHIP 150K(1005)
R2065	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2066	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2067	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2068	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2070	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2071	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2072	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2073	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2074	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2075	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2076	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2077	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2080	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2081	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2082	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2084	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2085	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R2086	1-250-539-11 o	RES, METAL FILM CHIP 68K(1005)
R2088	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2089	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2090	1-220-285-91 s	RES,SQUARE TYPE CHIP 10K(3225)
R2091	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2092	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2093	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2094	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2098	1-220-317-91 s	RES,SQUARE TYPE CHIP 220K 3225
R2099	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2100	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2101	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2102	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2103	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2106	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2107	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2108	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2109	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2110	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2111	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2112	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2113	1-220-223-91 s	RES,SQUARE TYPE CHIP 15K(4532)
R2114	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2115	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2116	1-220-340-91 s	RES,SQUARE TYPE CHIP 470K 4532
R2117	1-220-223-91 s	RES,SQUARE TYPE CHIP 15K(4532)
R2118	1-220-223-91 s	RES,SQUARE TYPE CHIP 15K(4532)
R2119	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2121	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2123	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2124	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2125	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2126	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2127	1-250-551-11 s	RES,METAL FILM CHIP 220K(1005)
R2129	△ 1-220-778-11 s	RES, NONFLAMMABLE FUSE 0.1
R2130	1-220-305-91 o	RES,SQUARE TYPE CHIP 22K(4532)
R2131	1-220-305-91 o	RES,SQUARE TYPE CHIP 22K(4532)
R2132	1-220-305-91 o	RES,SQUARE TYPE CHIP 22K(4532)
R2133	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2134	1-215-938-35 s	RES, METAL OXIDE FILM 220
R2135	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2136	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2137	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2140	1-242-797-21 s	RES, CHIP (SQUARE TYPE) 0.15
R2141	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R2143	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2144	1-218-895-91 s	RES, CHIP 100K (1608)
R2145	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2146	1-250-507-11 o	RES,METAL FILM CHIP 3.3K(1005)
R2147	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2148	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2149	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R2150	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2151	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2152	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R2153	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2154	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R2155	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R2156	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R2157	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2158	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2159	1-250-567-11 s	RES, METAL FILM CHIP 1M (1005)

PS-739D BOARD

Ref. No. or Q'ty	Part No.	SP Description
R2160	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2161	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R2162	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R2163	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2164	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2165	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R2166	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2168	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2169	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R2170	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R2171	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R2172	1-218-891-91 s	RES, CHIP 68K (1608)
R2173	1-218-891-91 s	RES, CHIP 68K (1608)
R2174	1-218-887-91 s	RES, CHIP 47K (1608)
R2175	1-218-879-91 s	RES, CHIP 22K (1608)
R2176	1-218-863-91 s	RES, CHIP 4.7K (1608)
R2177	1-218-957-81 s	RES, CHIP 2.2K (1005)
R2178	1-220-221-91 s	RES, SQUARE TYPE CHIP 100(4532)
R2179	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R2180	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R2181	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R2182	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R2183	1-250-547-11 s	RES, METAL FILM CHIP 150K(1005)
R2184	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2185	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R2186	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2187	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2188	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R2189	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R2190	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
RY2001	1-755-022-12 s	RELAY, POWER
T1	△ 1-445-541-11 s	TRANSFORMER, DC-DC CONVERTER
T201	1-445-540-11 s	TRANSFORMER, DC-DC CONVERTER
TH1	△ 1-802-887-31 s	THERMISTOR, POWER (1D2-15LCS)
TH1001	△ 1-803-384-11 s	THERMISTOR (1608)
THP1	△ 1-811-824-11 s	THERMISTOR, POSITIVE
TP1	1-535-757-21 s	CHIP, CHECKER
TP201	1-535-757-21 s	CHIP, CHECKER
TP1001	1-535-757-21 s	CHIP, CHECKER
TP1002	1-535-757-21 s	CHIP, CHECKER
TP1003	1-535-757-21 s	CHIP, CHECKER
TP1004	1-780-925-11 s	TERMINAL, LUG
TP1005	1-780-925-11 s	TERMINAL, LUG
TP2001	1-535-757-21 s	CHIP, CHECKER
TP2002	1-535-757-21 s	CHIP, CHECKER
TP2003	1-535-757-21 s	CHIP, CHECKER
TP2004	1-535-757-21 s	CHIP, CHECKER
TP2006	1-535-757-21 s	CHIP, CHECKER
TP2008	1-535-757-21 s	CHIP, CHECKER
TP2009	1-780-925-11 s	TERMINAL, LUG
TP2010	1-780-925-11 s	TERMINAL, LUG
VDR1	△ 1-804-996-21 s	VARISTOR

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-702-A s	MOUNTED CIRCUIT BOARD, SDP-19
1pc	△ 1-458-766-11 s	MODULE, OPTICAL (SFP)

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	4-669-854-01 s	CAGE, TOP
C001	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C002	1-116-737-11 s	CAP, CERAMIC 1MF X5R 1005
C003	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C004	1-100-591-91 s	CAP, CHIP CERAMIC 1MF B 2012
C007	1-100-581-81 s	CAP, CHIP CERAMIC 0.0047MF B1005
C009	1-100-581-81 s	CAP, CHIP CERAMIC 0.0047MF B1005
C013	1-116-118-11 s	CAP, ELECT 47MF 105
C014	1-116-118-11 s	CAP, ELECT 47MF 105
C015	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C016	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C019	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C020	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C021	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C022	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C025	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C026	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C028	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C030	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C031	1-116-707-11 s	CAP, CERAMIC 47MF X5R 3216
C032	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C101	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C102	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C104	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C200	1-126-391-21 s	CAP, CHIP ELECT 47MF (5X5.7)
C201	1-126-391-21 s	CAP, CHIP ELECT 47MF (5X5.7)
C202	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C203	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C204	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C207	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C208	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C209	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C210	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C211	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C212	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C213	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C300	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C301	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C302	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C303	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C304	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C307	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C308	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C309	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C310	1-125-891-91 s	CAP, CHIP CERAMIC 0.47MF B 1608
C311	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C312	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C315	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C316	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C317	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C318	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C319	1-125-891-91 s	CAP, CHIP CERAMIC 0.47MF B 1608
C320	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C321	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C322	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C326	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C327	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C328	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C400	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C401	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C402	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C404	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C405	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C406	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C407	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C410	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C411	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C412	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C413	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C414	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C415	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C416	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C417	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C418	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C419	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C420	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C421	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C422	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C423	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C424	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C425	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C426	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C427	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C428	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C429	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C430	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C431	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C432	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C433	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C434	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C441	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C442	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C443	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C444	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C445	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C446	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C447	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C448	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C455	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C456	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C457	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C458	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C459	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C460	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C461	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C462	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C463	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C464	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C465	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C466	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C467	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C468	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C469	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C470	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C471	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C472	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C473	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C474	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C475	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C476	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C477	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C478	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C479	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C480	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C481	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C482	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C483	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C484	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C485	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C486	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C487	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C488	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C489	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C490	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C491	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C492	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C493	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C494	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C495	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C496	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C497	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C498	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C500	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C501	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
C502	1-112-815-91 s	CAP, CERAMIC 10MF C (1608)
CN001	1-774-731-21 s	PIN, CONNECTOR (PC BOARD) 5P
CN100	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN101	1-778-534-31 s	CONNECTOR, FFC/FPC(ZIF) ST 45P
CN102	1-843-236-11 s	HEADER ASSEMBLY FOR PWB ST 41P
CN300	1-695-479-21 o	PIN, CONNECTOR (PC BOARD) 2P
CN301	1-817-176-11 s	CONNECTOR, SFP FIBER CHANNEL
CN400	1-784-254-21 s	CONNECTOR 10P
D300	8-719-991-01 s	DIODE DAP222-TL
D301	8-719-991-01 s	DIODE DAP222-TL
D302	8-719-991-01 s	DIODE DAP222-TL
D303	6-502-598-01 s	DI SML-D12U8WT86
D304	6-502-598-01 s	DI SML-D12U8WT86
D306	6-502-598-01 s	DI SML-D12U8WT86
D400	6-502-598-01 s	DI SML-D12U8WT86
E001	1-535-877-22 s	CHIP, CHECKER
E002	1-535-877-22 s	CHIP, CHECKER
E003	1-535-877-22 s	CHIP, CHECKER
FB300	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB302	1-469-094-21 s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FL200	1-233-345-21 s	FILTER, LOW PASS (5.5MHZ)
IC002	6-714-911-01 s	IC TPS54325PWPR
IC003	6-714-911-01 s	IC TPS54325PWPR
IC006	6-712-135-01 o	IC R1173H001D-T1-FE
IC007	6-712-135-01 o	IC R1173H001D-T1-FE
IC101	6-706-487-01 s	IC TC7SH08FU
IC103	6-706-487-01 s	IC TC7SH08FU
IC104	6-706-487-01 s	IC TC7SH08FU
IC105	6-704-600-01 s	IC M24C02-WMN6T(B)
IC200	8-759-561-46 s	IC AD8014ARTZ-REEL7
IC201	6-704-489-01 s	IC AD9283BRSZ-RL80
IC206	8-759-675-54 s	IC TC7W53FK(TE85R)
IC300	6-707-414-01 s	IC DS90LV011ATMF
IC301	6-706-484-01 s	IC TC7SH04FU
IC302	6-706-484-01 s	IC TC7SH04FU
IC304	6-706-484-01 s	IC TC7SH04FU
IC305	6-704-600-01 s	IC M24C02-WMN6T(B)
IC306	8-759-327-01 s	IC NJM062V(TE2)
IC308	6-707-414-01 s	IC DS90LV011ATMF
IC401	6-704-566-01 s	IC R3112N291A-TR-FE
IC402	6-707-843-01 s	IC TC74LCX125FT(EKJ)
IC403	6-707-843-01 s	IC TC74LCX125FT(EKJ)

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
IC404	6-715-036-01 s	IC TC7SZ04FU, RSONYJ
IC405	6-707-843-01 s	IC TC74LCX125FT (EKJ)
IC406	6-715-039-01 s	IC TC7SZ08FU, RSONYJ
IC407	6-716-953-01 s	IC W25Q64CVSSIG
L001	1-457-455-11 s	CHOKE COIL 10UH
L002	1-457-455-11 s	CHOKE COIL 10UH
L004	1-457-455-11 s	CHOKE COIL 10UH
L005	1-457-455-11 s	CHOKE COIL 10UH
L007	1-481-035-11 s	INDUCTOR (10UH)
L008	1-481-035-11 s	INDUCTOR (10UH)
L200	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L201	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L202	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L203	1-400-791-21 s	INDUCTOR, CHIP 10UH (2518)
L300	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L301	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L302	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L303	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L400	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L401	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L402	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L404	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L405	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
L406	1-400-788-21 s	INDUCTOR, CHIP 1.0UH (2518)
Q007	8-729-928-28 s	TRANSISTOR DTA144EE-TL
Q008	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q200	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q201	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q208	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q300	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q301	8-729-928-05 s	TRANSISTOR 2SC4617TL-QR
Q302	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q303	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
Q400	8-729-928-25 s	TRANSISTOR 2SA1774TL-QR
R001	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R002	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R004	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R005	1-250-531-11 s	RES, METAL FILM CHIP 33K(1005)
R006	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R007	1-250-491-11 o	RES, METAL FILM CHIP 680(1005)
R008	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R009	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R014	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R018	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R019	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R020	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R021	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R022	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R023	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R024	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R026	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R027	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R028	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R029	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R030	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R031	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R034	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R035	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R036	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R104	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R105	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R106	1-220-878-81 s	RES, CHIP 22 (1005)
R107	1-220-878-81 s	RES, CHIP 22 (1005)

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R108	1-220-878-81 s	RES, CHIP 22 (1005)
R109	1-220-878-81 s	RES, CHIP 22 (1005)
R110	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R111	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R112	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R113	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R114	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R115	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R116	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R117	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R118	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R119	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R120	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R121	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R122	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R123	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R124	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R125	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R128	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R129	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R130	1-220-878-81 s	RES, CHIP 22 (1005)
R131	1-220-878-81 s	RES, CHIP 22 (1005)
R132	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R133	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R134	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R135	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R136	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R137	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R138	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R139	1-250-473-11 s	RES, METAL FILM CHIP 120(1005)
R140	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R141	1-250-447-11 s	RES, METAL FILM CHIP 10 (1005)
R142	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R143	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R144	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R145	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R146	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R147	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R148	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R149	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R150	1-250-477-11 o	RES, METAL FILM CHIP 180(1005)
R200	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R201	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R202	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R203	1-250-543-11 o	RES, METAL FILM CHIP 100K(1005)
R204	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R205	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R206	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R207	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R208	1-250-523-11 o	RES, METAL FILM CHIP 15K(1005)
R209	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R210	1-250-499-11 o	RES, METAL FILM CHIP 1.5K(1005)
R211	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R212	1-250-515-11 s	RES, METAL FILM CHIP 6.8K(1005)
R213	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R214	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R215	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R216	1-250-479-11 o	RES, METAL FILM CHIP 220(1005)
R217	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R218	1-250-503-11 o	RES, METAL FILM CHIP 2.2K(1005)
R219	1-250-483-11 s	RES, METAL FILM CHIP 330(1005)
R220	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)
R221	1-250-511-11 o	RES, METAL FILM CHIP 4.7K(1005)
R222	1-250-487-11 s	RES, METAL FILM CHIP 470(1005)
R223	1-250-495-11 s	RES, METAL FILM CHIP 1.0K(1005)

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R224	1-220-878-81 s	RES, CHIP 22 (1005)
R225	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R227	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R228	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R229	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R230	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R231	1-250-511-11 o	RES,METAL FILM CHIP 4.7K(1005)
R232	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R233	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R235	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R236	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R262	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R263	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R264	1-250-499-11 o	RES,METAL FILM CHIP 1.5K(1005)
R305	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R306	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R307	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R308	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R309	1-220-264-91 s	RES,SQUARE TYPE CHIP 1.0K 3225
R311	1-250-543-11 o	RES,METAL FILM CHIP 100K(1005)
R312	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R313	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R314	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R315	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R316	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R317	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R318	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R319	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R320	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R321	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R322	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R323	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R326	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R327	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R328	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R329	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R330	1-250-527-11 o	RES, METAL FILM CHIP 22K(1005)
R331	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R332	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R335	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R336	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R337	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R338	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R339	1-250-515-11 s	RES,METAL FILM CHIP 6.8K(1005)
R340	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R341	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R342	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R343	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R344	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R345	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R346	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R347	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R348	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R351	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R352	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R353	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R357	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R358	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R359	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R360	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R361	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R400	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R401	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)

SDP-19 BOARD

Ref. No. or Q'ty	Part No.	SP Description
R402	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R403	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R404	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R405	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R406	1-250-535-11 s	RES, METAL FILM CHIP 47K(1005)
R407	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R408	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R409	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R410	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R411	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R412	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R413	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R414	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R415	1-250-471-11 s	RES, METAL FILM CHIP 100(1005)
R416	1-250-495-11 s	RES,METAL FILM CHIP 1.0K(1005)
R417	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R422	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R423	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R424	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R425	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R426	1-250-503-11 o	RES,METAL FILM CHIP 2.2K(1005)
R427	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R428	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R429	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R430	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R431	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R432	1-250-463-11 s	RES, METAL FILM CHIP 47 (1005)
R433	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
R434	1-250-519-11 s	RES, METAL FILM CHIP 10K(1005)
RB100	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB101	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB102	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB103	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB104	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB105	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB106	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB107	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB200	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB201	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB202	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB203	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB300	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB301	1-234-377-21 s	RES, NETWORK 4.7K (1005X4)
RB400	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB401	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB402	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB403	1-234-378-21 s	RES, NETWORK 10K (1005X4)
THP001	△ 1-803-615-21 s	THERMISTOR, POSITIVE
THP002	△ 1-803-615-21 s	THERMISTOR, POSITIVE
TP001	1-780-925-11 s	TERMINAL, LUG
TP002	1-780-925-11 s	TERMINAL, LUG
TP003	1-780-925-11 s	TERMINAL, LUG
TP200	1-535-877-22 s	CHIP, CHECKER

SW-1615 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1974-728-A s	MOUNTED CIRCUIT BOARD, SW-1615
C001	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

SW-1615 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C002	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C003	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C004	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C005	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C006	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C007	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C008	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C009	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C010	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C011	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C012	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C035	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C036	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C037	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C038	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C039	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C040	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C041	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C042	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C101	1-118-403-11 s	CAP, CERAMIC 1000PF X7R 1005
C102	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C104	1-114-728-91 o	CAP, CERAMIC 22MF B 3216
C121	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C122	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C123	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C124	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C125	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C126	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C127	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C128	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C129	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C130	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C131	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C132	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C133	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C134	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C135	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C136	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C137	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C138	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C139	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C140	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C141	1-114-582-91 s	CAP, CERAMIC 0.1MF B 1005
C201	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C202	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C203	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C204	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C205	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C206	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C207	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C208	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C251	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C252	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C253	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C254	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C256	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C301	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C302	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C303	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C305	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)

SW-1615 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C308	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
CN001	1-816-113-21 s	CONNECTOR 15P
CN002	1-843-015-11 s	CONNECTOR, BOARD TO BOARD 60P
D001	6-501-124-01 s	DIODE RSX101VA-30TR
D035	6-502-598-01 s	DI SML-D12U8WT86
D036	6-502-598-01 s	DI SML-D12U8WT86
D037	6-502-197-01 s	DI SML-D12M8WT86SM
D038	6-502-196-01 s	DI SML-D12Y8WT86SP
D039	6-502-598-01 s	DI SML-D12U8WT86
D040	6-502-197-01 s	DI SML-D12M8WT86SM
D301	8-719-991-01 s	DIODE DAP222-TL
FB001	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB002	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB035	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB121	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
IC001	6-714-067-01 s	IC PCA9555DB-T
IC4	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC5	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC7	6-706-906-01 s	IC NJM2732RB1 (TE2)
IC008	6-714-067-01 s	IC PCA9555DB-T
IC011	6-714-067-01 s	IC PCA9555DB-T
IC202	6-710-944-01 s	IC TC74VHC573FK (EL,K)
IC203	6-710-944-01 s	IC TC74VHC573FK (EL,K)
IC251	6-710-944-01 s	IC TC74VHC573FK (EL,K)
IC252	6-710-944-01 s	IC TC74VHC573FK (EL,K)
IC301	6-706-482-01 s	IC TC7SH00FU
IC302	6-710-944-01 s	IC TC74VHC573FK (EL,K)
IC303	6-710-944-01 s	IC TC74VHC573FK (EL,K)
JC002	1-218-990-81 s	CONDUCTOR, CHIP (1005)
L101	1-457-455-11 s	CHOKE COIL 10UH
Q001	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q002	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q003	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q004	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q005	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q006	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q007	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q008	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q009	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q010	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q035	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q036	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q037	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q038	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q039	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q040	8-729-929-09 s	TRANSISTOR DTC123JE-TL
Q101	8-729-928-82 s	TRANSISTOR DTC144EE-TL
Q201	6-551-042-01 s	TR RN4905
Q202	6-551-042-01 s	TR RN4905
Q203	6-551-042-01 s	TR RN4905
Q204	6-551-042-01 s	TR RN4905
Q205	6-551-042-01 s	TR RN4905
Q206	6-551-042-01 s	TR RN4905
Q207	6-551-042-01 s	TR RN4905
Q221	6-551-042-01 s	TR RN4905
Q222	6-551-042-01 s	TR RN4905
Q223	6-551-042-01 s	TR RN4905
Q224	6-551-042-01 s	TR RN4905
Q225	6-551-042-01 s	TR RN4905
Q226	6-551-042-01 s	TR RN4905
Q227	6-551-042-01 s	TR RN4905
Q251	6-551-042-01 s	TR RN4905


Ref. No. or Q'ty	Part No.	SP	Description
Q252	6-551-042-01	s	TR RN4905
Q253	6-551-042-01	s	TR RN4905
Q254	6-551-042-01	s	TR RN4905
Q255	6-551-042-01	s	TR RN4905
Q256	6-551-042-01	s	TR RN4905
Q257	6-551-042-01	s	TR RN4905
Q258	6-551-042-01	s	TR RN4905
Q271	6-551-042-01	s	TR RN4905
Q272	6-551-042-01	s	TR RN4905
Q273	6-551-042-01	s	TR RN4905
Q274	6-551-042-01	s	TR RN4905
Q275	6-551-042-01	s	TR RN4905
Q276	6-551-042-01	s	TR RN4905
Q277	6-551-042-01	s	TR RN4905
Q278	6-551-042-01	s	TR RN4905
Q301	6-551-042-01	s	TR RN4905
Q302	6-551-042-01	s	TR RN4905
Q303	6-551-042-01	s	TR RN4905
Q304	6-551-042-01	s	TR RN4905
Q305	6-551-042-01	s	TR RN4905
Q306	6-551-042-01	s	TR RN4905
Q307	6-551-042-01	s	TR RN4905
Q308	6-551-042-01	s	TR RN4905
Q321	6-551-042-01	s	TR RN4905
Q322	6-551-042-01	s	TR RN4905
Q323	6-551-042-01	s	TR RN4905
Q324	6-551-042-01	s	TR RN4905
Q325	6-551-042-01	s	TR RN4905
Q326	6-551-042-01	s	TR RN4905
Q327	6-551-042-01	s	TR RN4905
Q328	6-551-042-01	s	TR RN4905
R001	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R002	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R003	1-250-463-11	s	RES, METAL FILM CHIP 47 (1005)
R004	1-250-463-11	s	RES, METAL FILM CHIP 47 (1005)
R005	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R006	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R007	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R008	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R009	1-250-499-11	o	RES,METAL FILM CHIP 1.5K(1005)
R010	1-250-499-11	o	RES,METAL FILM CHIP 1.5K(1005)
R011	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R012	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R013	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R014	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R015	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R016	1-250-491-11	o	RES, METAL FILM CHIP 680(1005)
R017	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R018	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R019	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R020	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R021	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R022	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R023	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R024	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R025	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R026	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R027	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R028	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R035	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R036	1-250-527-11	o	RES, METAL FILM CHIP 22K(1005)
R037	1-250-463-11	s	RES, METAL FILM CHIP 47 (1005)
R038	1-250-463-11	s	RES, METAL FILM CHIP 47 (1005)
R039	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)
R040	1-250-495-11	s	RES,METAL FILM CHIP 1.0K(1005)



[illegible]

[illegible]


Ref. No. or Q'ty	Part No.	SP	Description
R311	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R312	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R313	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R314	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R315	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R316	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R317	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R318	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R319	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R320	1-250-495-11	s	RES, METAL FILM CHIP 1.0K (1005)
R321	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R322	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R323	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R324	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R325	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R326	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R327	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R328	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R329	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R330	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R331	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R332	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R333	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R334	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R335	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
R336	1-250-503-11	o	RES, METAL FILM CHIP 2.2K (1005)
RB1	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB3	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RV121	1-225-488-11	s	RES, VAR, CARBON 10K
RV122	1-227-562-11	s	RES, VAR, CARBON 10K
RV123	1-227-562-11	s	RES, VAR, CARBON 10K
RV124	1-227-562-11	s	RES, VAR, CARBON 10K
RV125	1-227-562-11	s	RES, VAR, CARBON 10K
RV126	1-227-562-11	s	RES, VAR, CARBON 10K
RV127	1-227-562-11	s	RES, VAR, CARBON 10K
S001	1-798-387-11	s	SWITCH, TACTILE (ILLUMINATED)
S002	1-798-386-11	s	SWITCH, TACTILE (ILLUMINATED)
S003	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S004	1-798-387-11	s	SWITCH, TACTILE (ILLUMINATED)
S005	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S006	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S007	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S008	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S009	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S010	1-798-385-11	s	SWITCH, TACTILE (ILLUMINATED)
S035	1-762-531-21	s	SWITCH, TOGGLE
S036	1-762-531-21	s	SWITCH, TOGGLE
S037	1-762-531-21	s	SWITCH, TOGGLE
TP001	1-535-877-22	s	CHIP, CHECKER

AU-358
AU-358 (1/2)



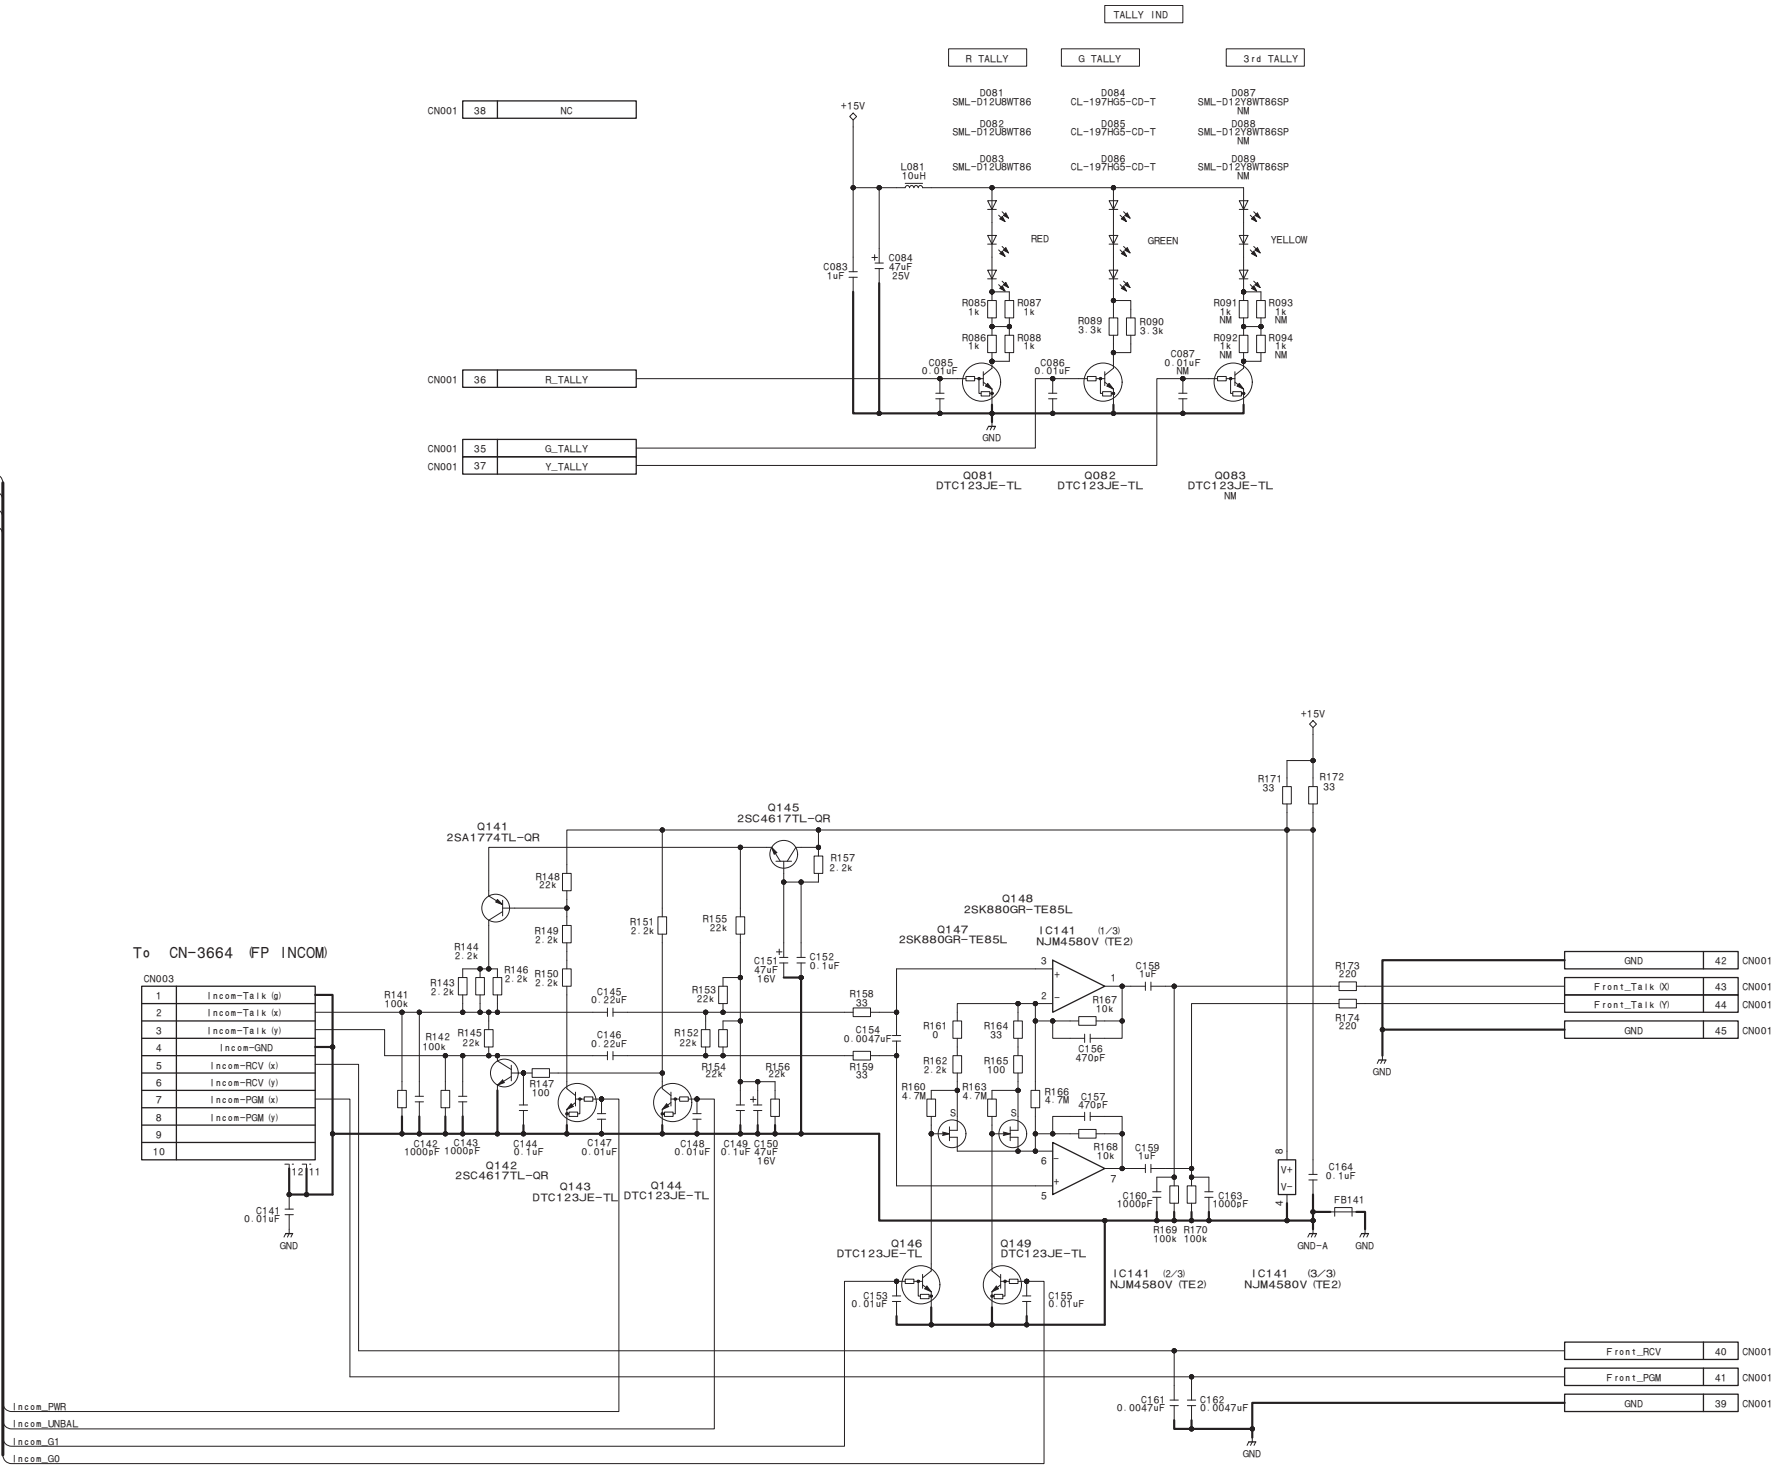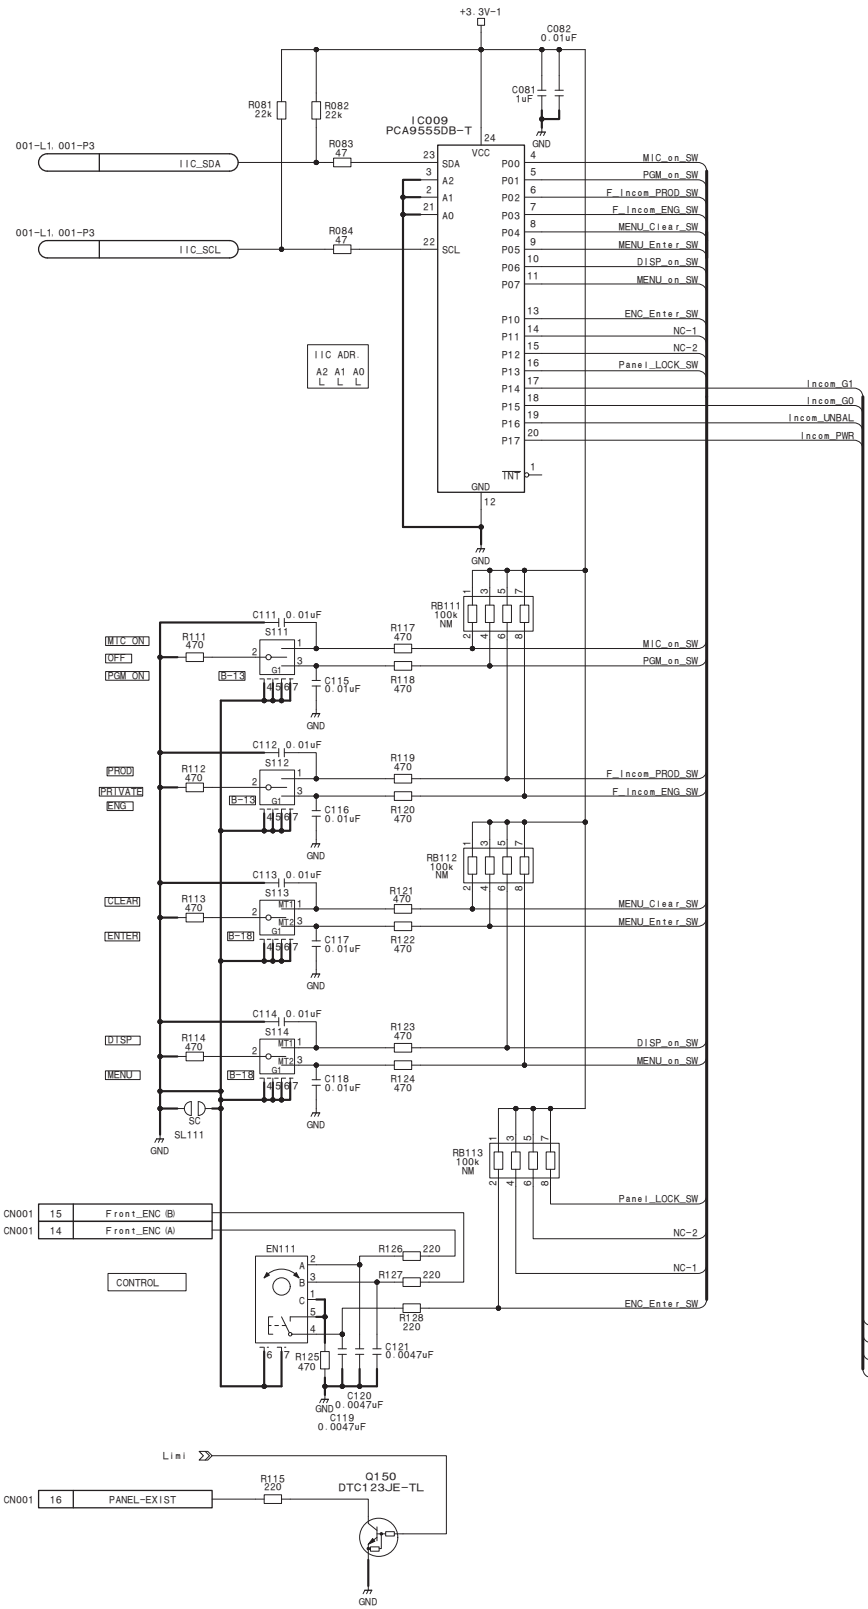


CN-3661

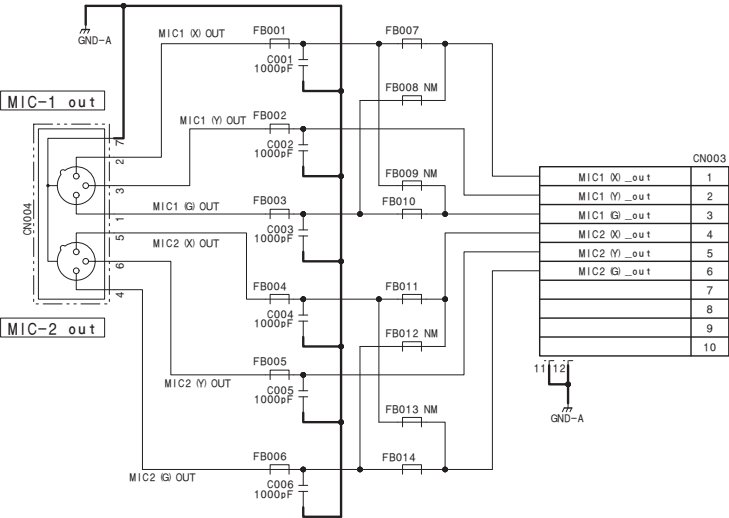


CN-3661
BOARD NO. 1-889-639-11
CN-3661_1

CN-3662
CN-3662 (1/2)

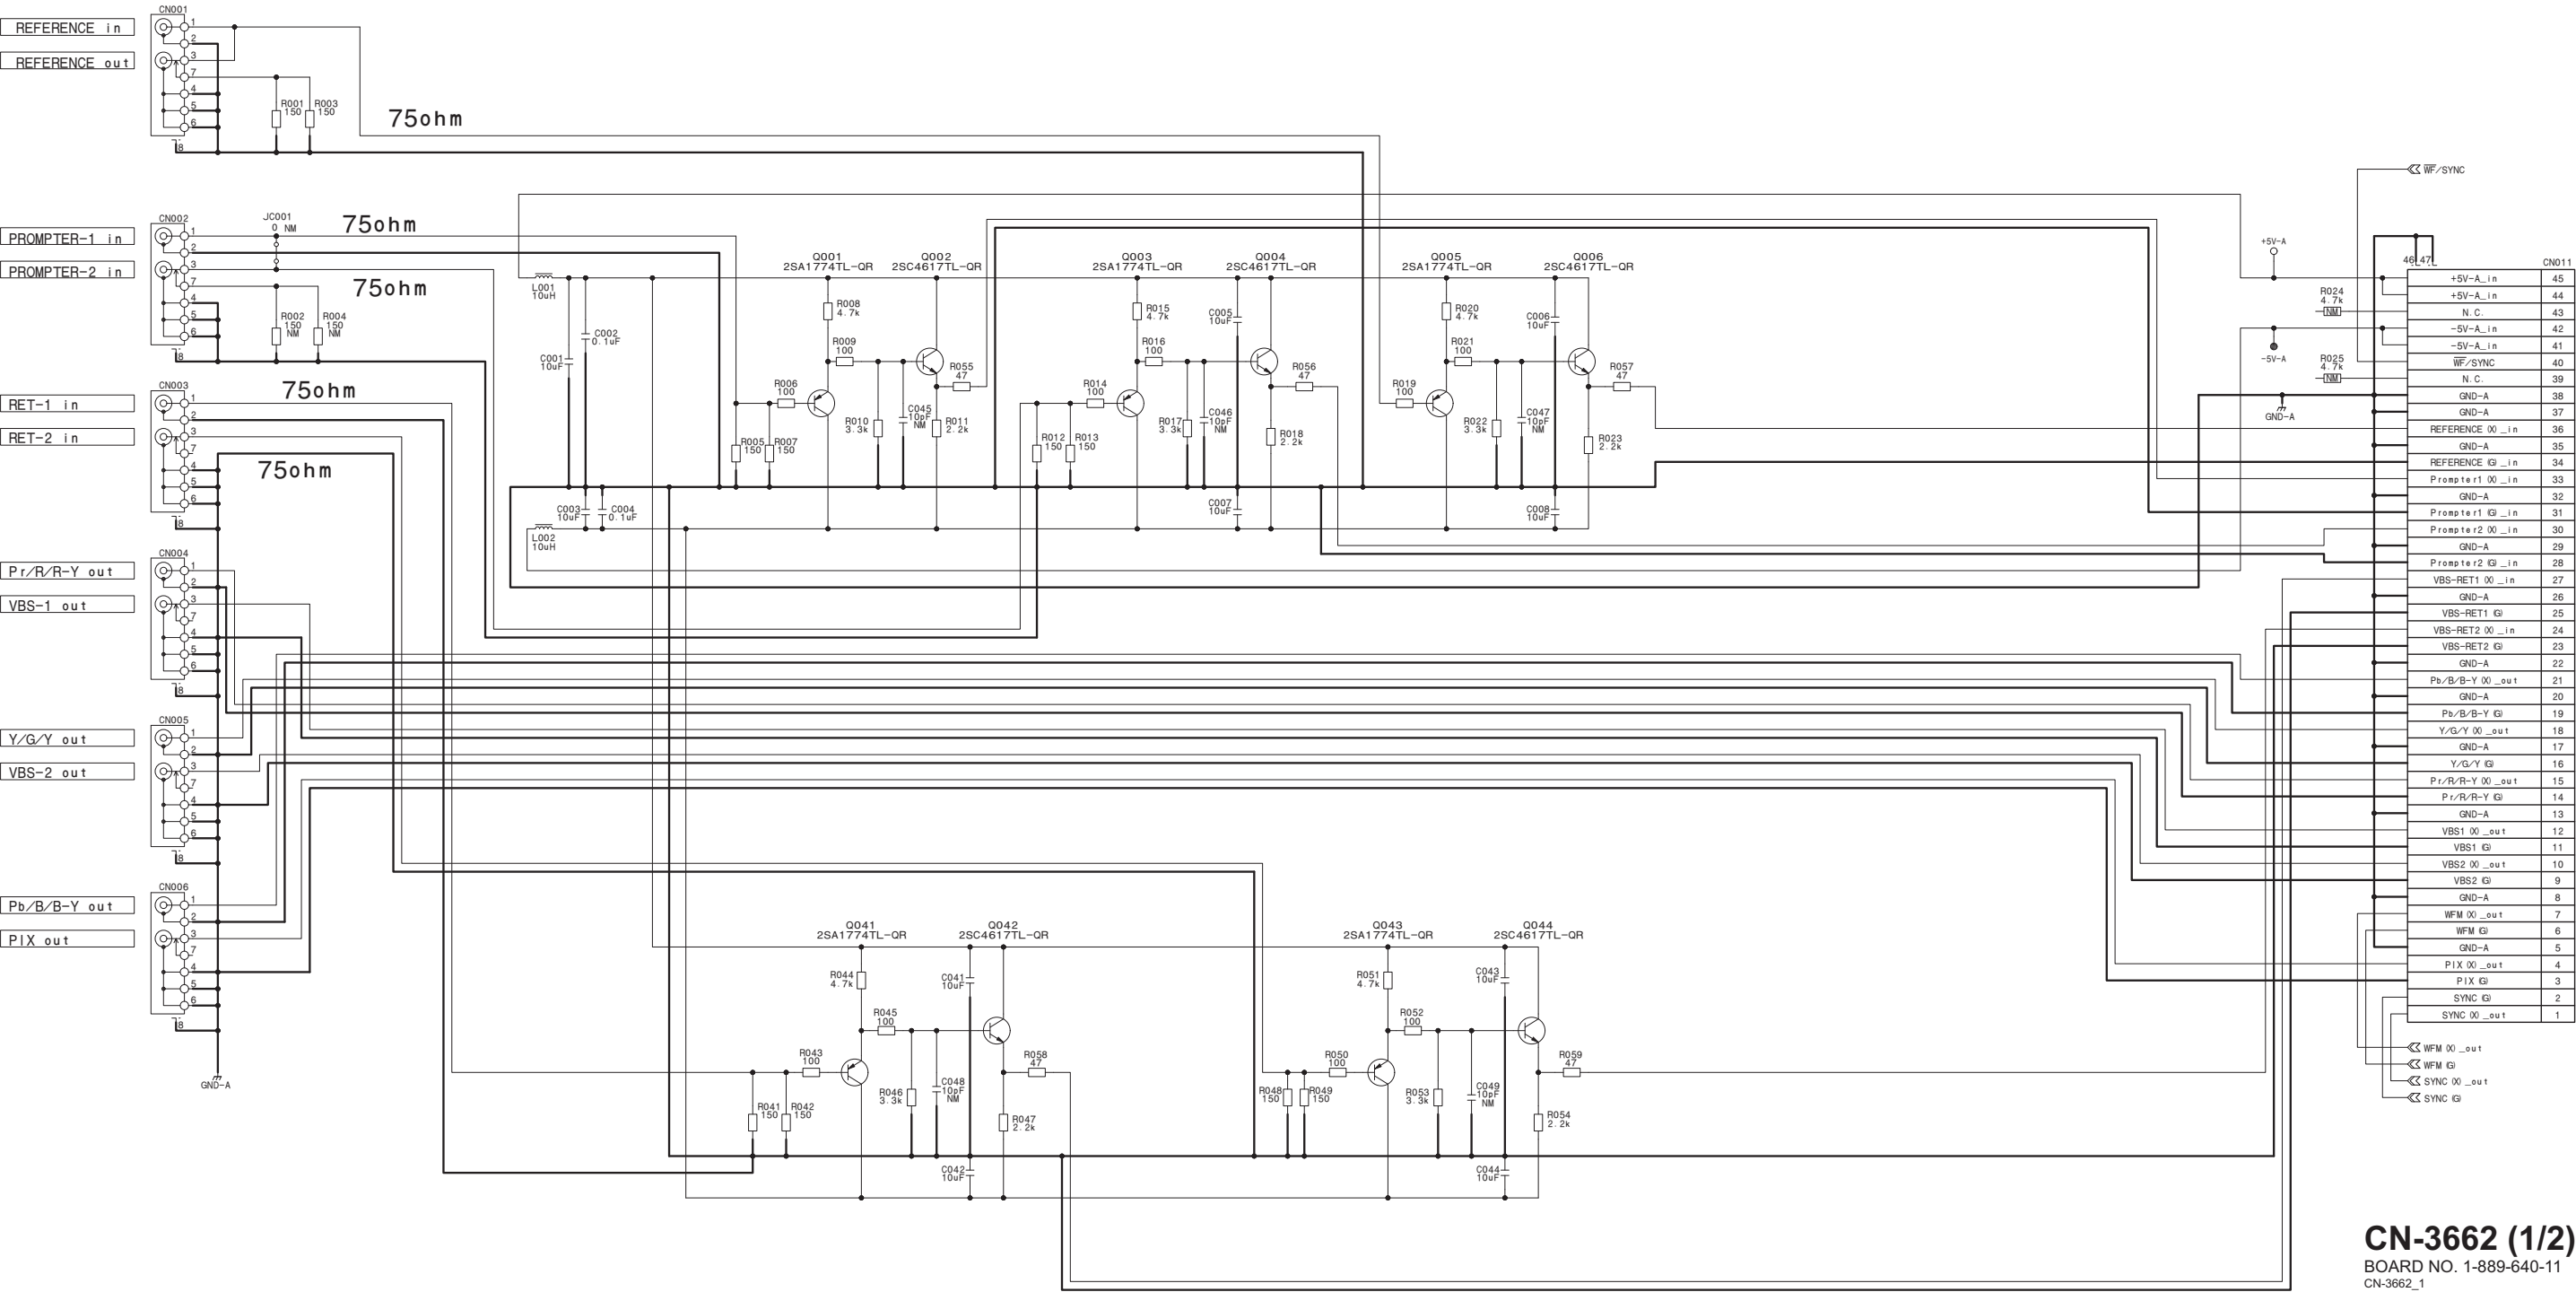


CN-3662 (1/2)
BOARD NO. 1-889-640-11
CN-3662_1

CN-3662 (2/2)

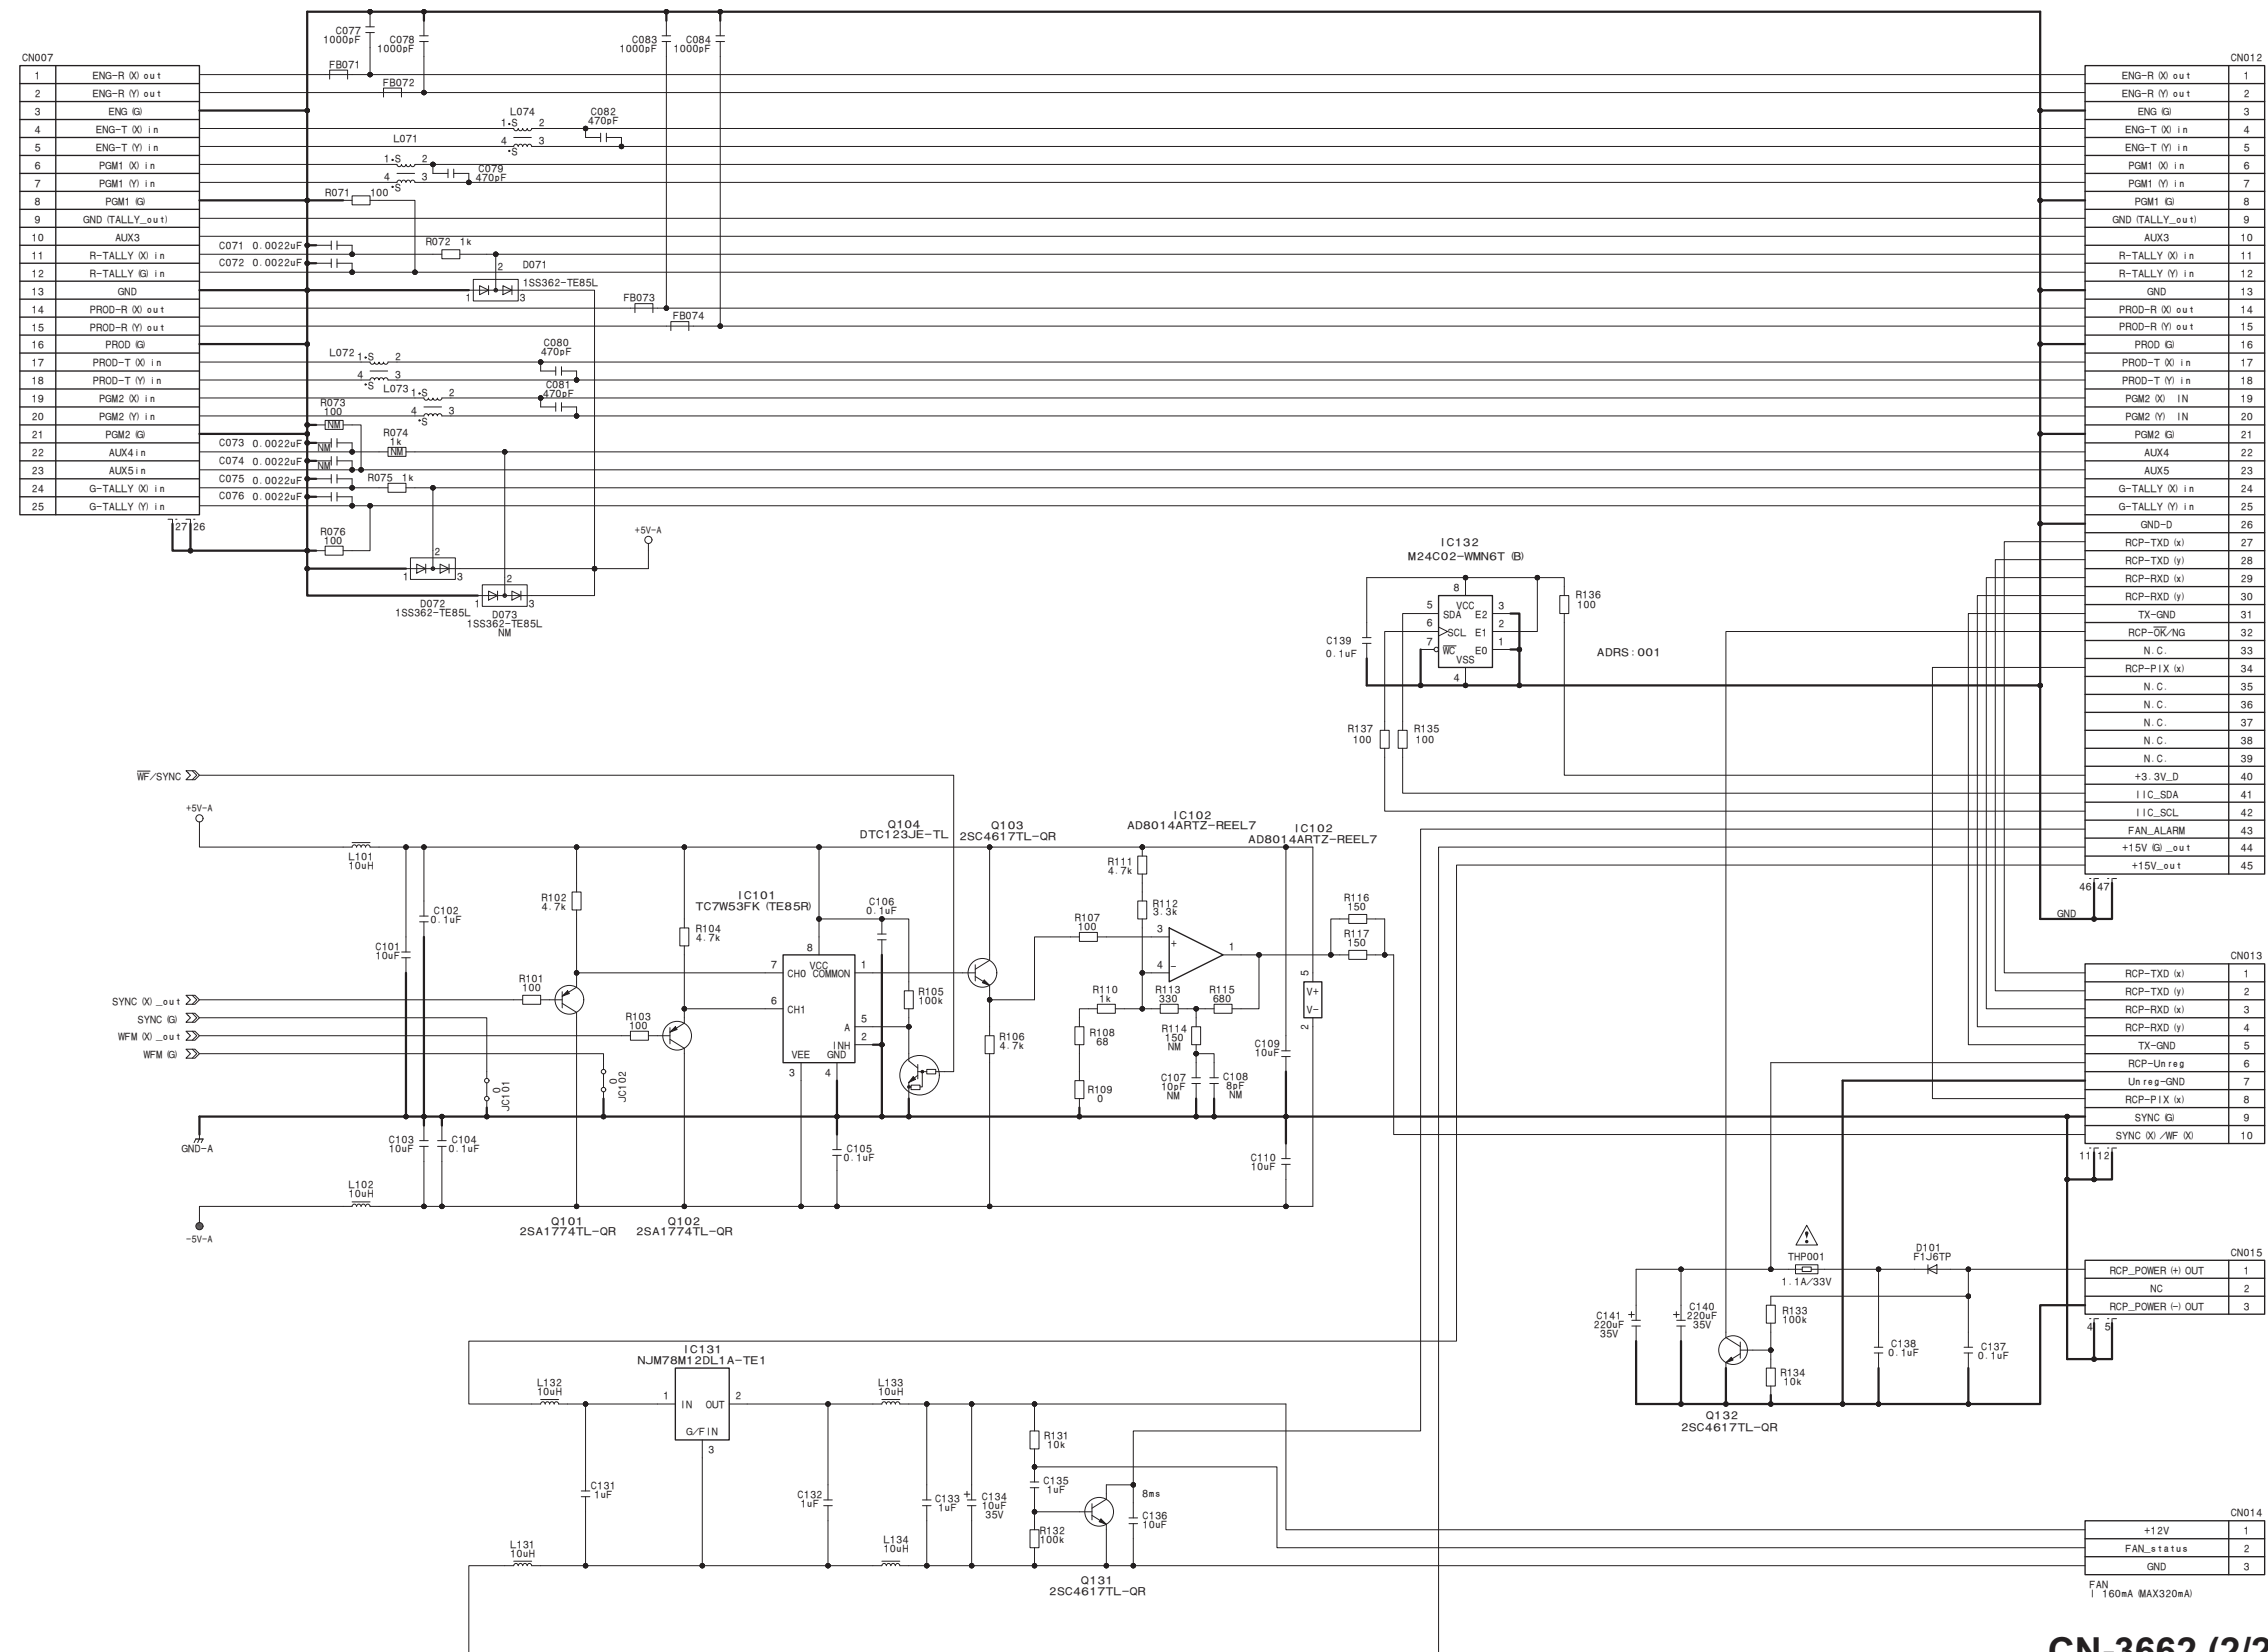


CN-3662 (2/2)
BOARD NO. 1-889-640-11
CN-3662_2

CN-3663

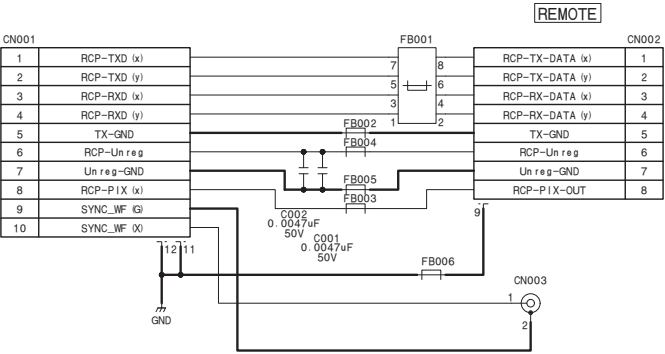


CN-3663
BOARD NO. 1-889-645-11
CN-3663_1

CN-3664

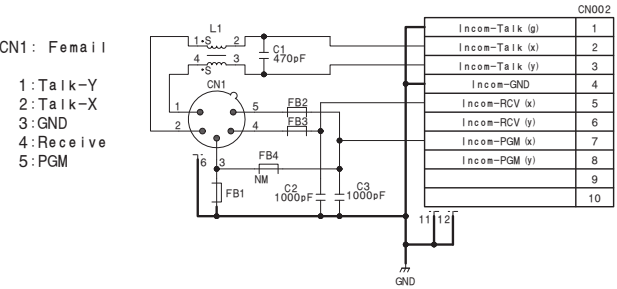


CN-3664
BOARD NO. 1-889-642-11
CN-3664_1



CT-257D

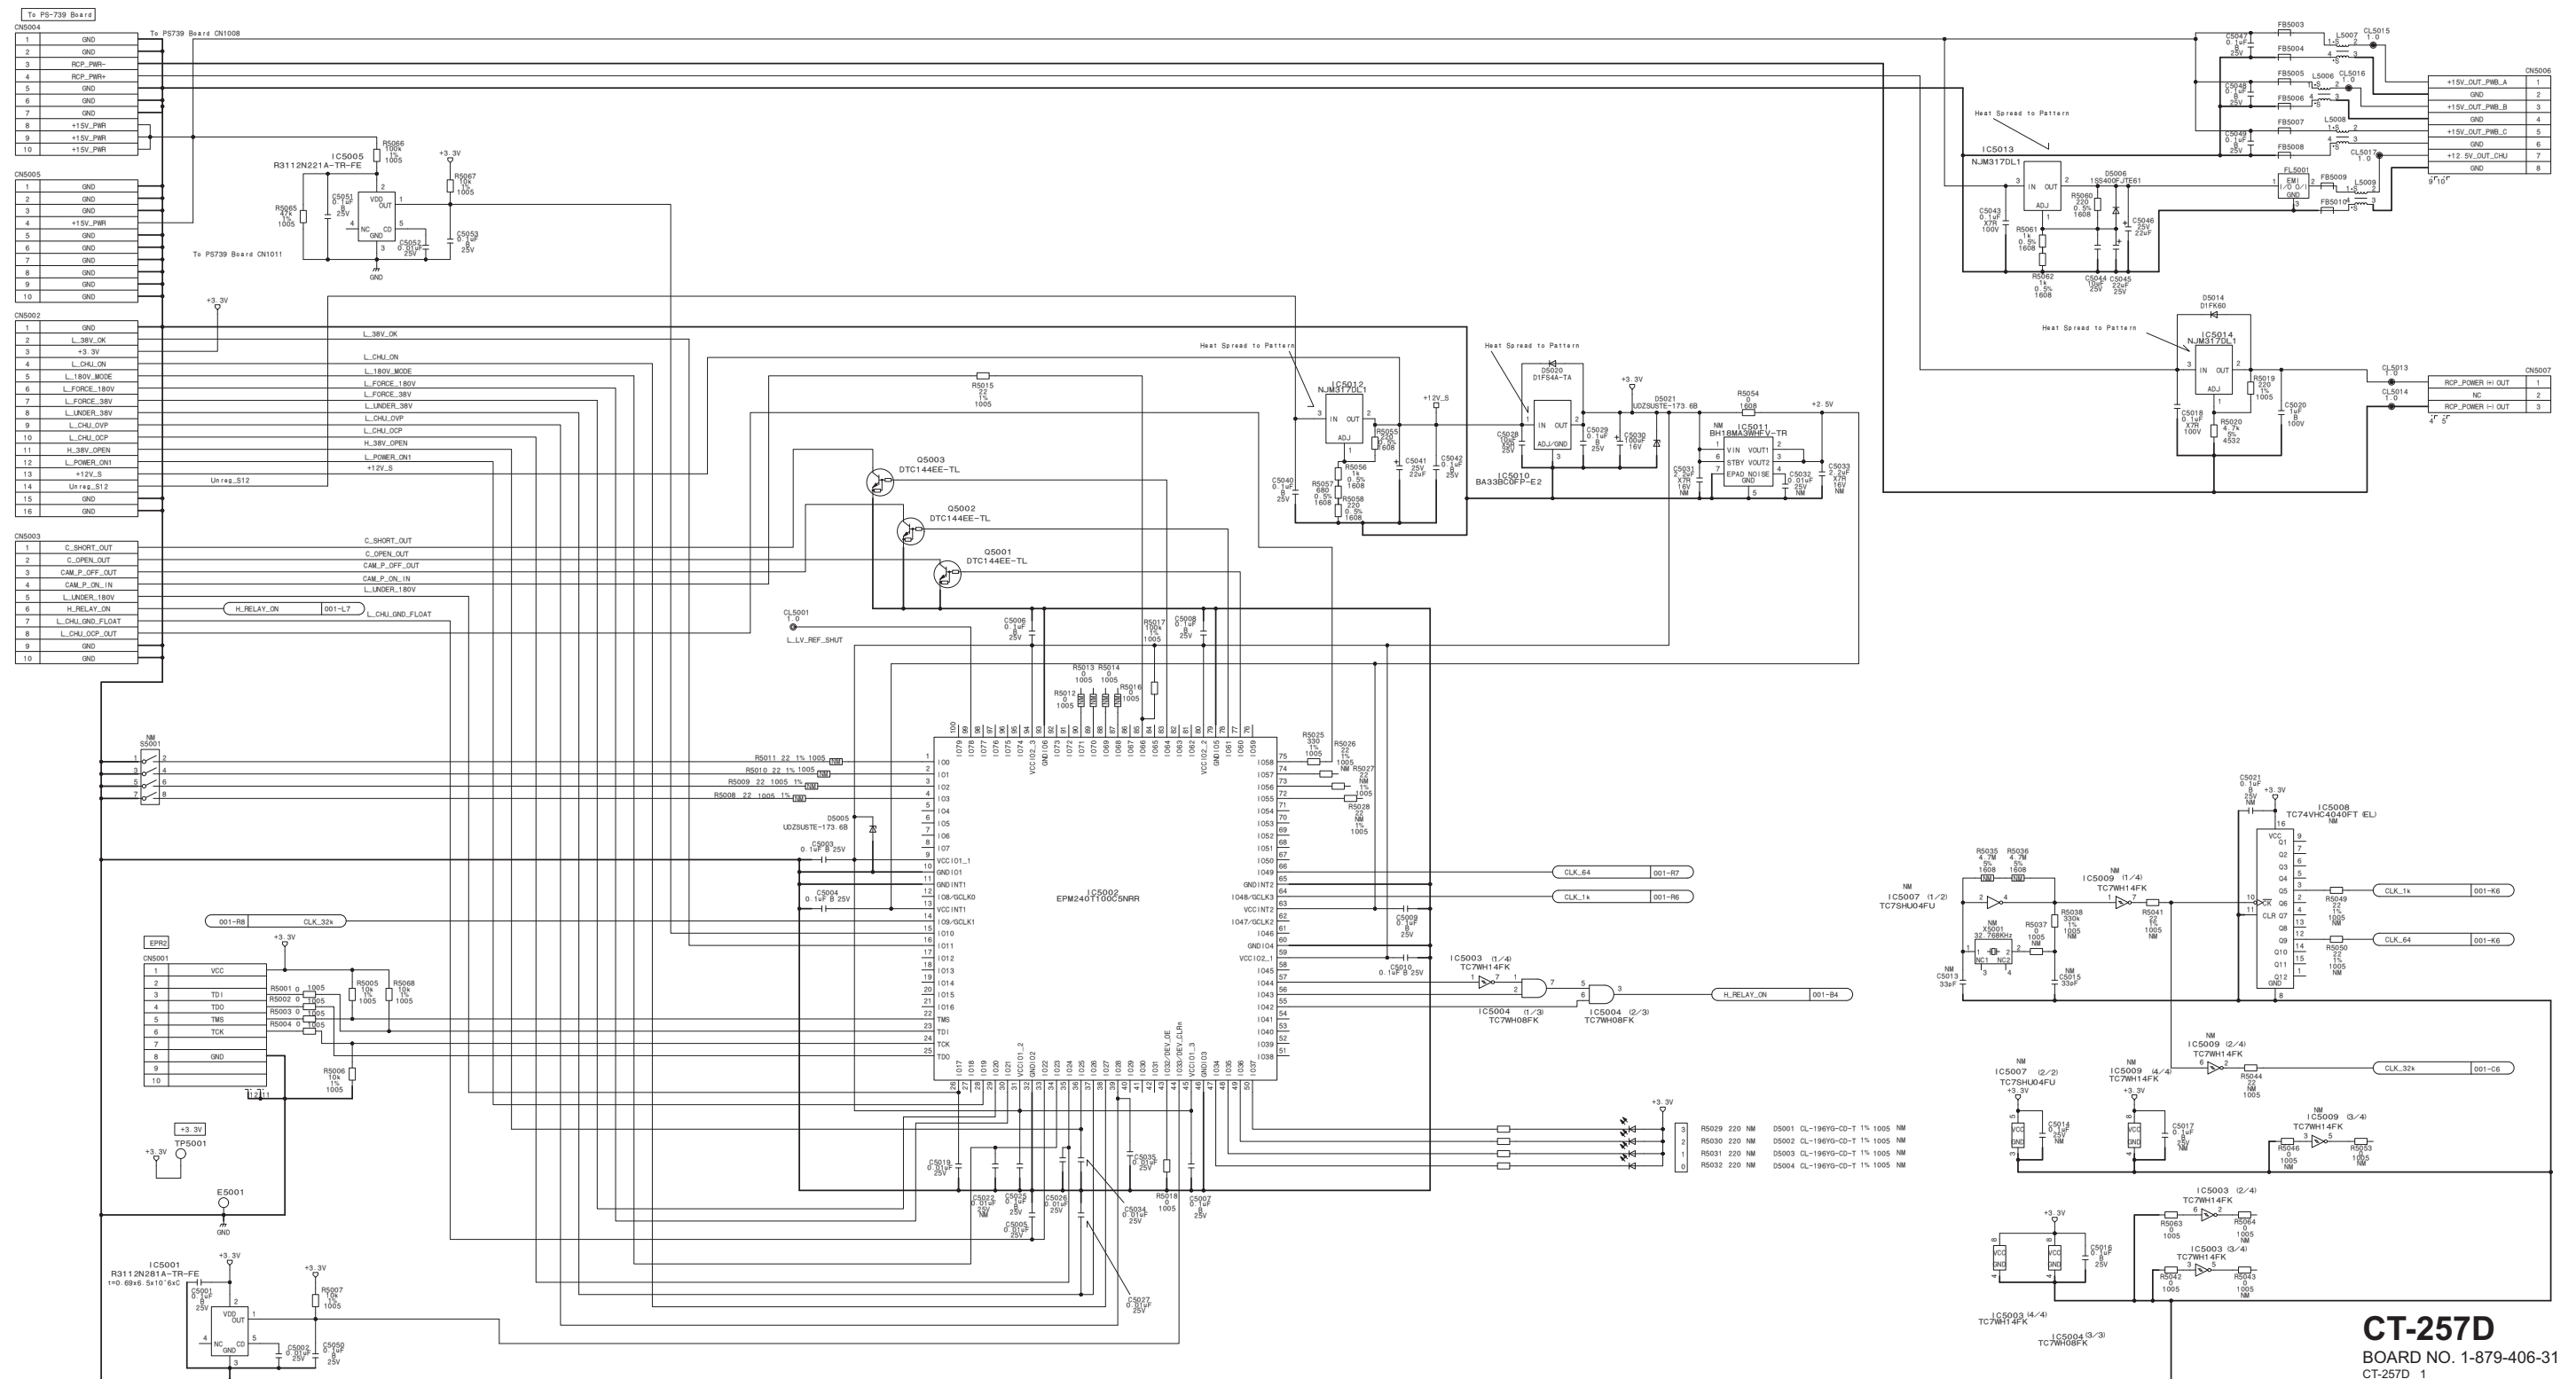

DM-152
DM-152 (1/19)

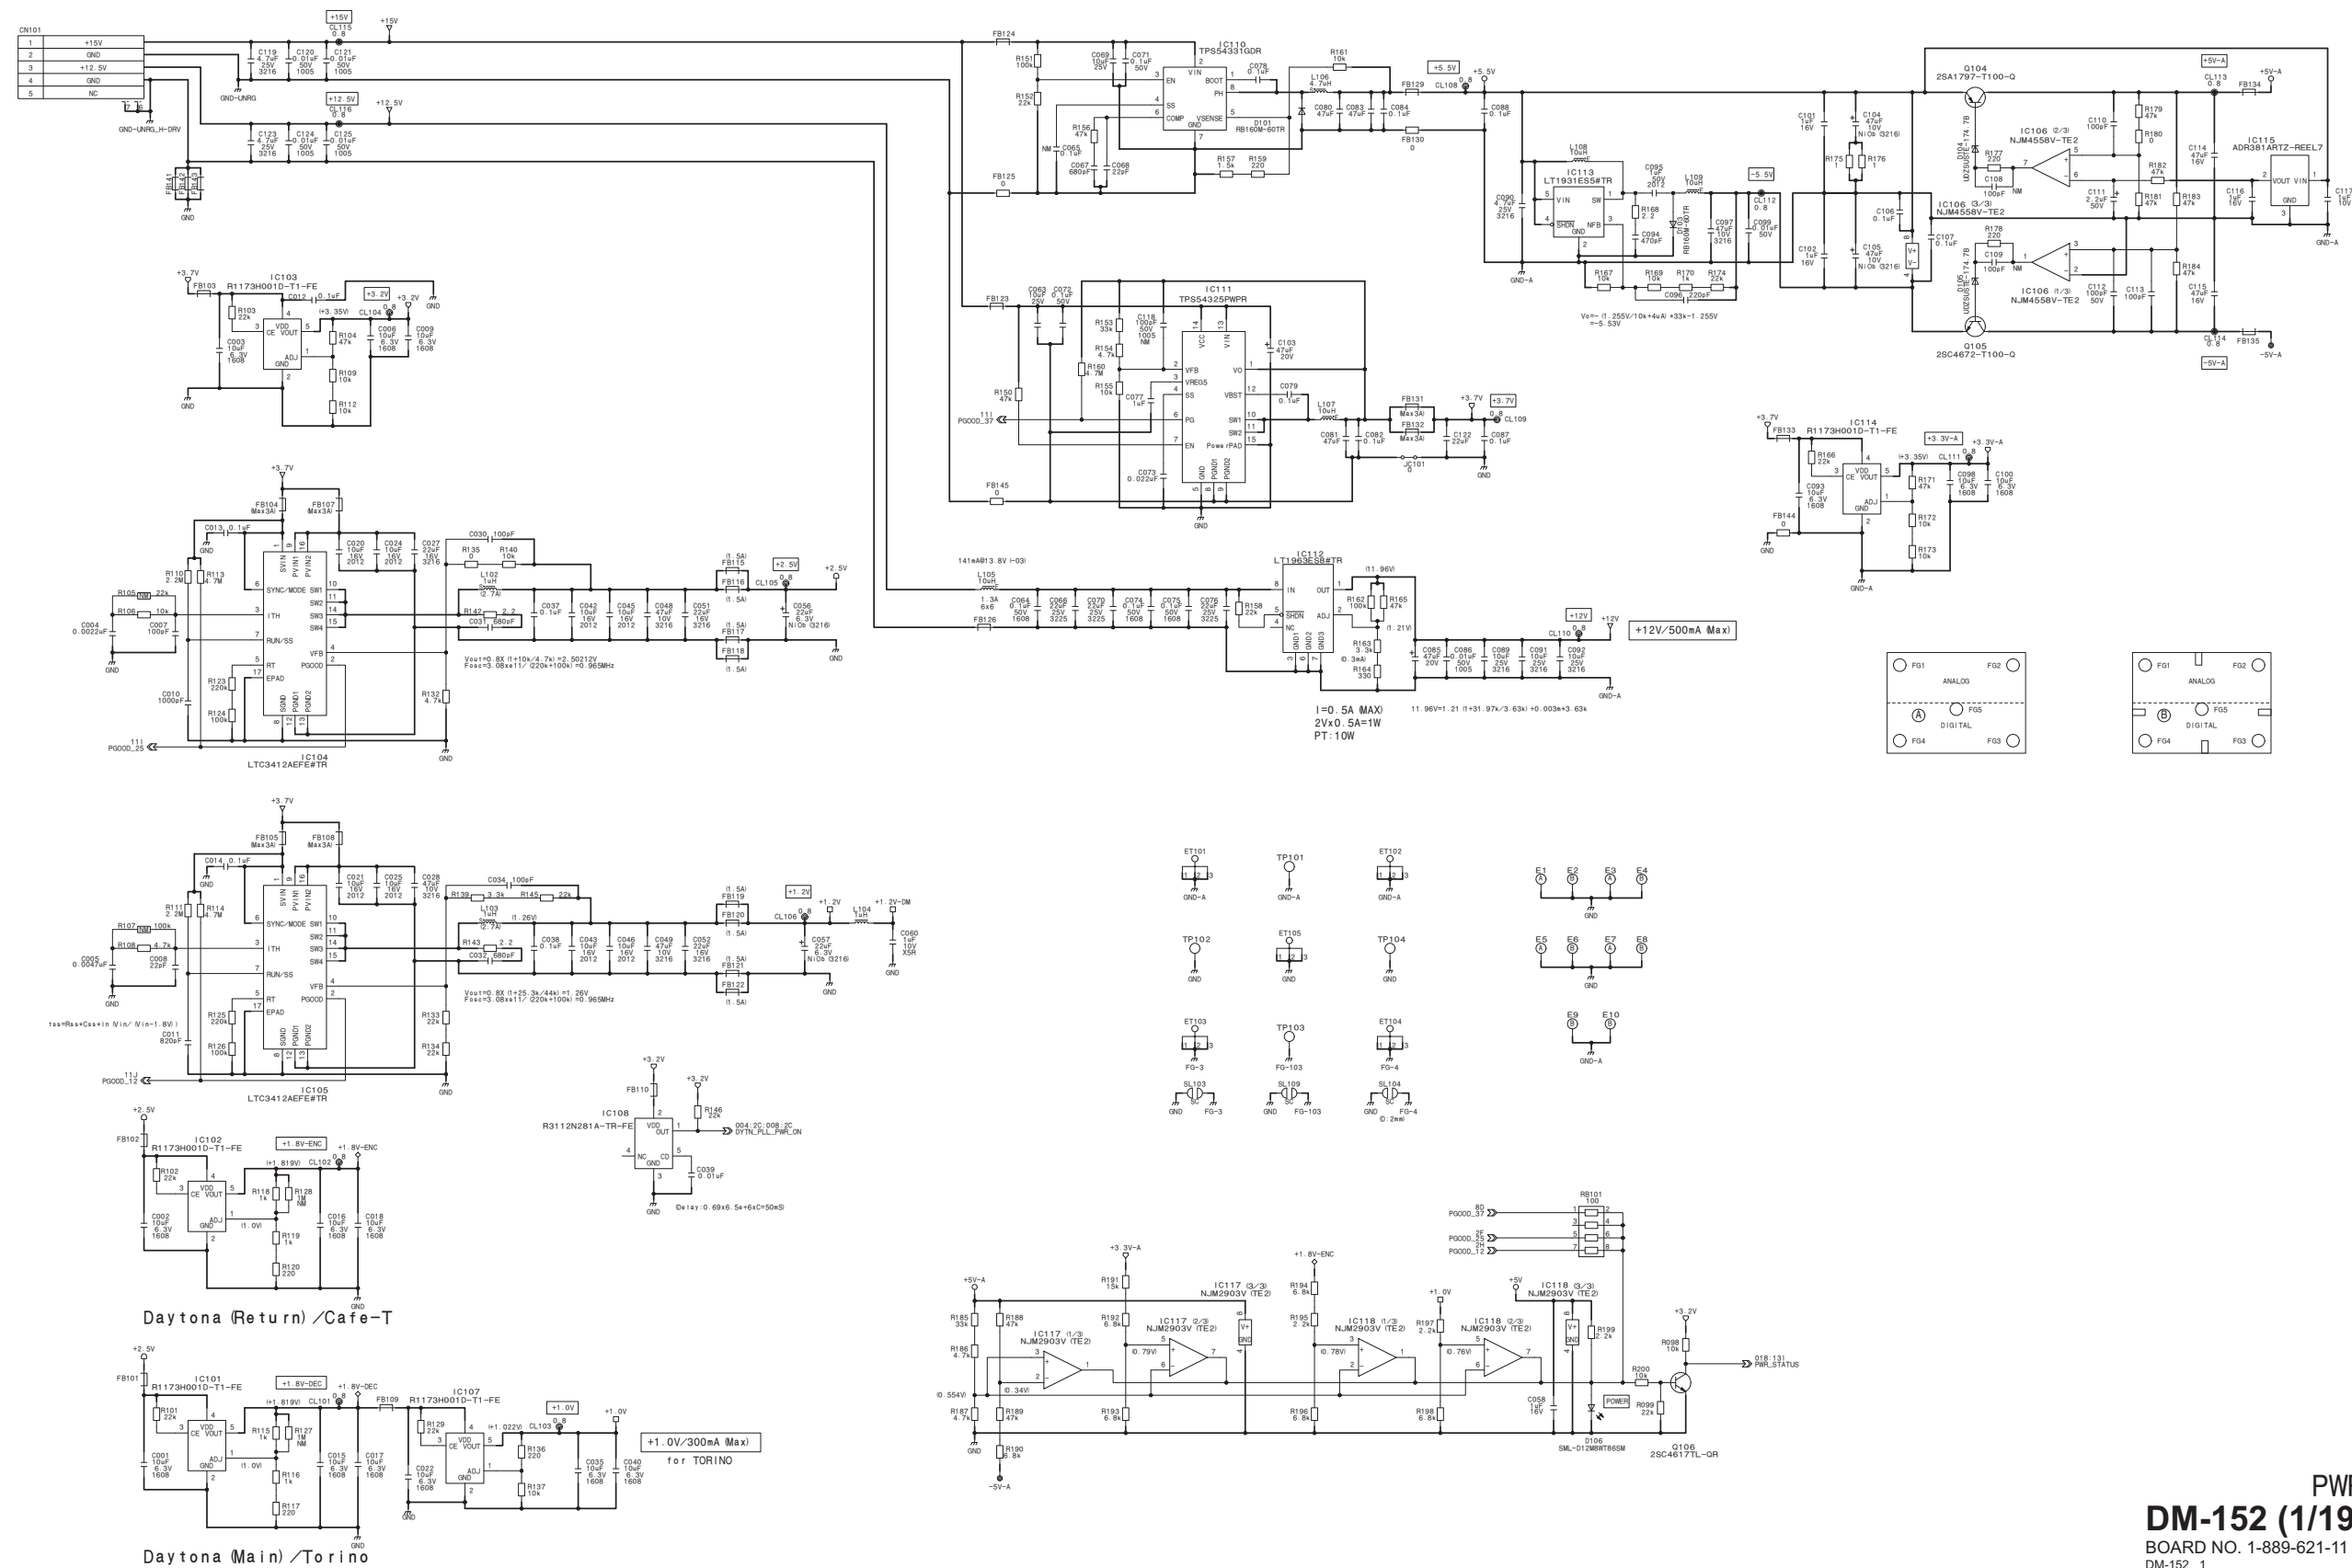




PWR
DM-152 (1/19)
BOARD NO. 1-889-621-11
DM-152_1

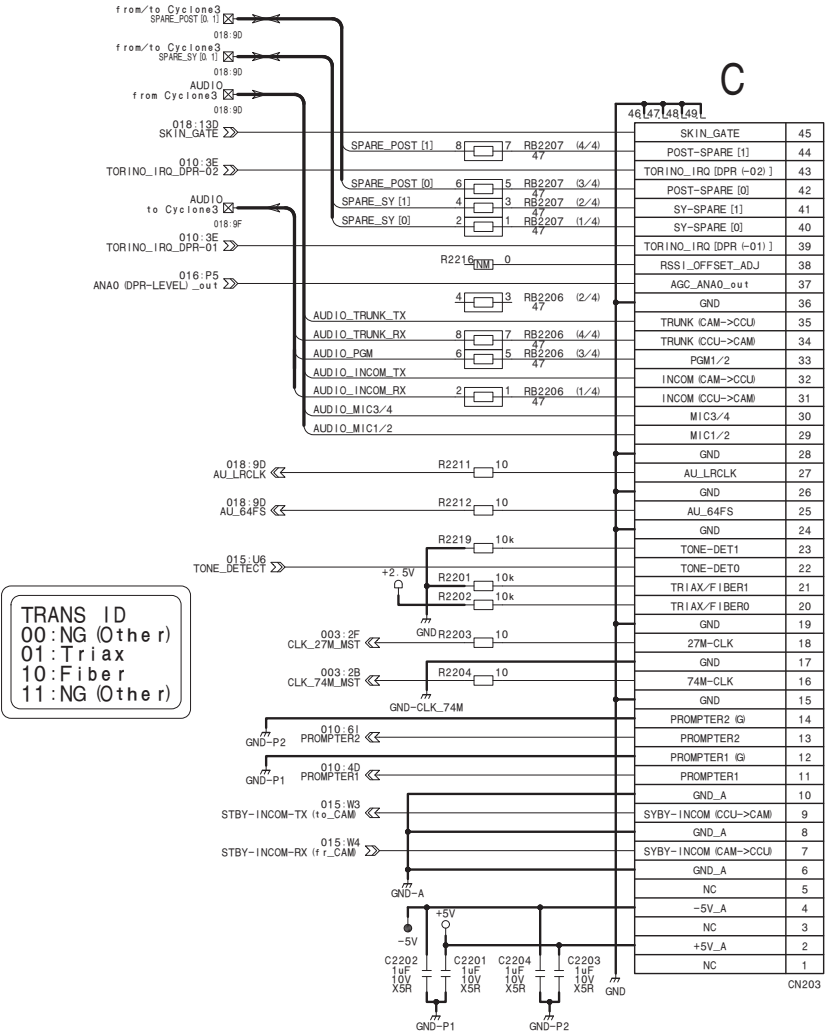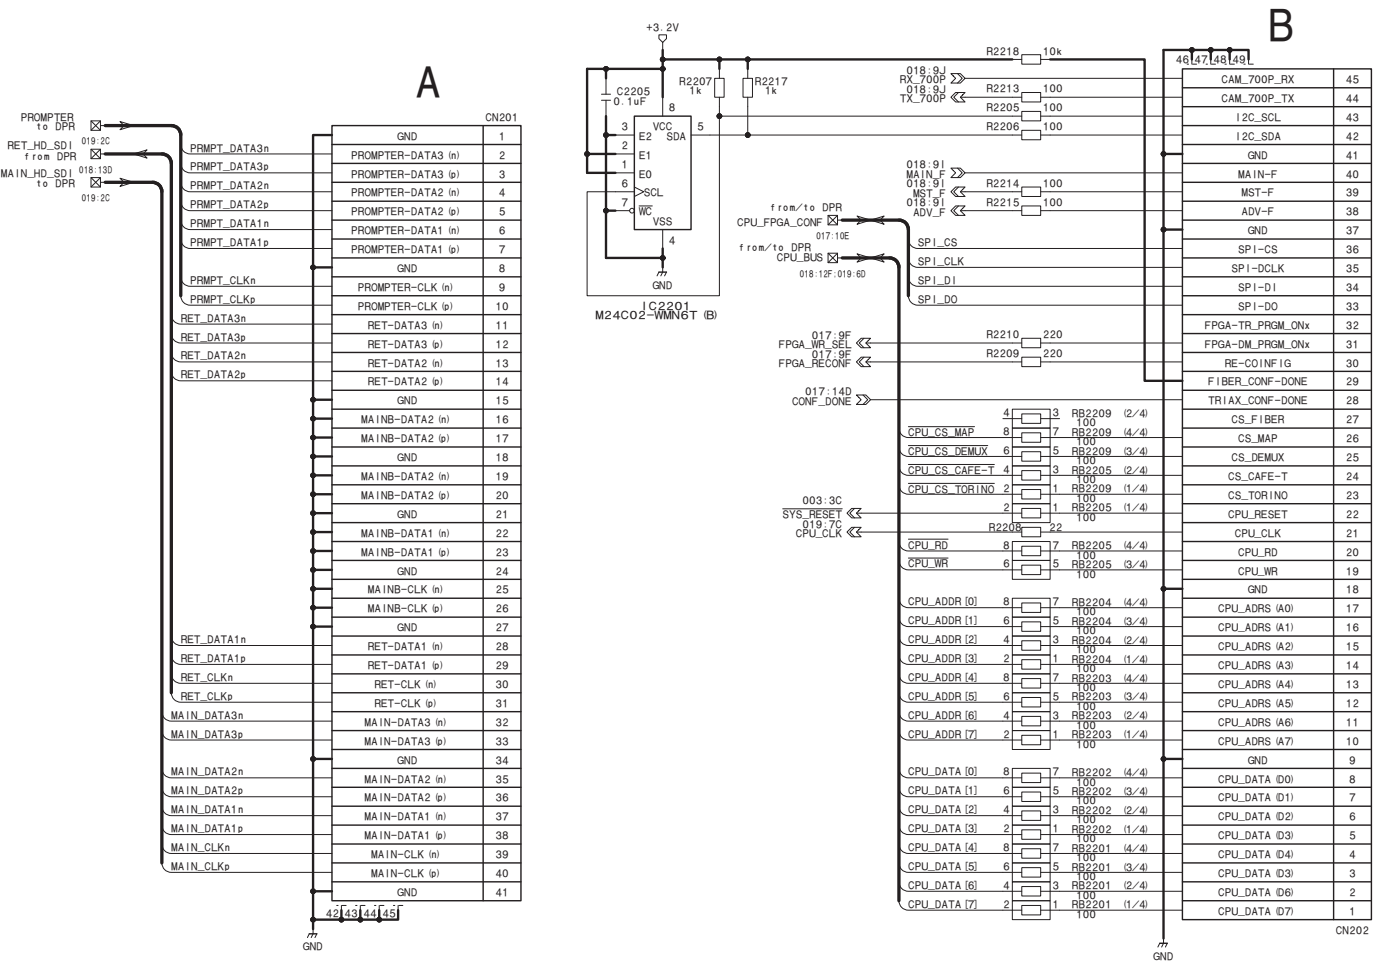

CN from/to DPR

DM-152 (2/19)
BOARD NO. 1-889-621-11
DM-152_2

DM-152 (3/19)

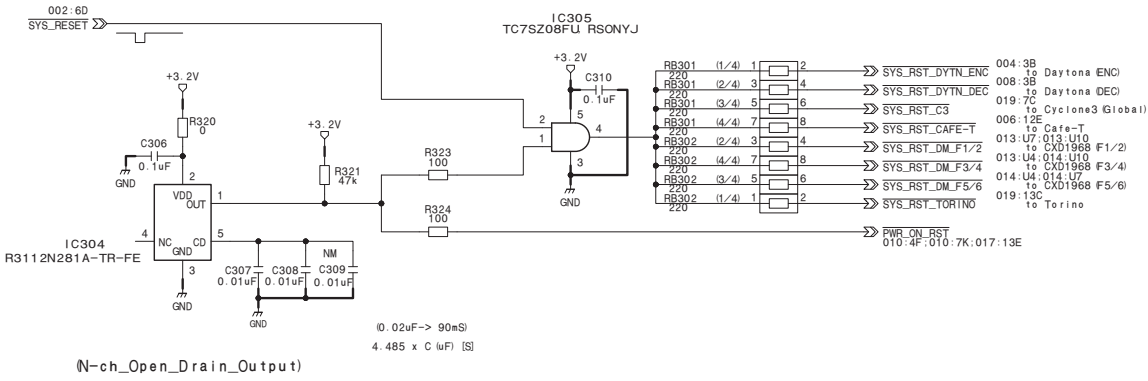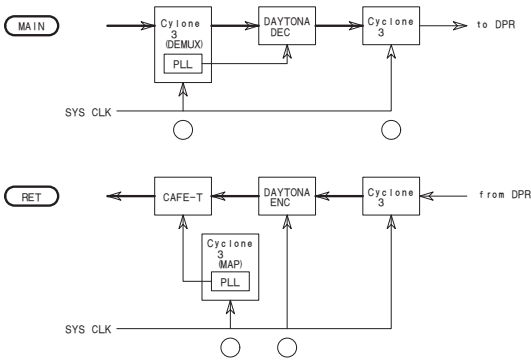
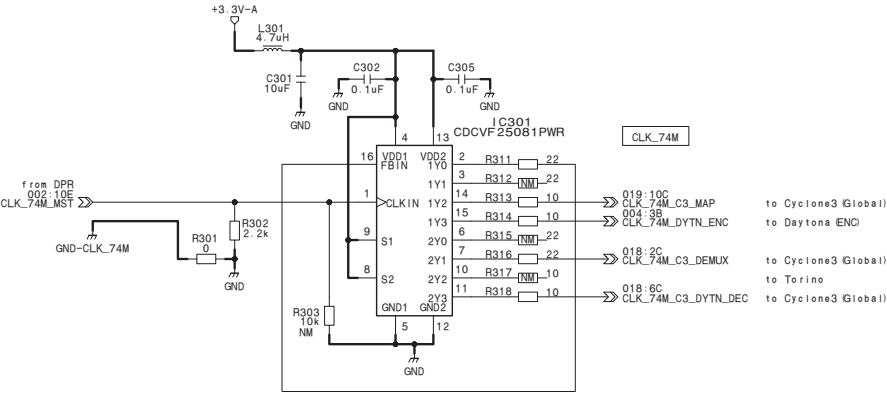


CLK/Reset

DM-152 (3/19)

BOARD NO. 1-889-621-11
DM-152_3



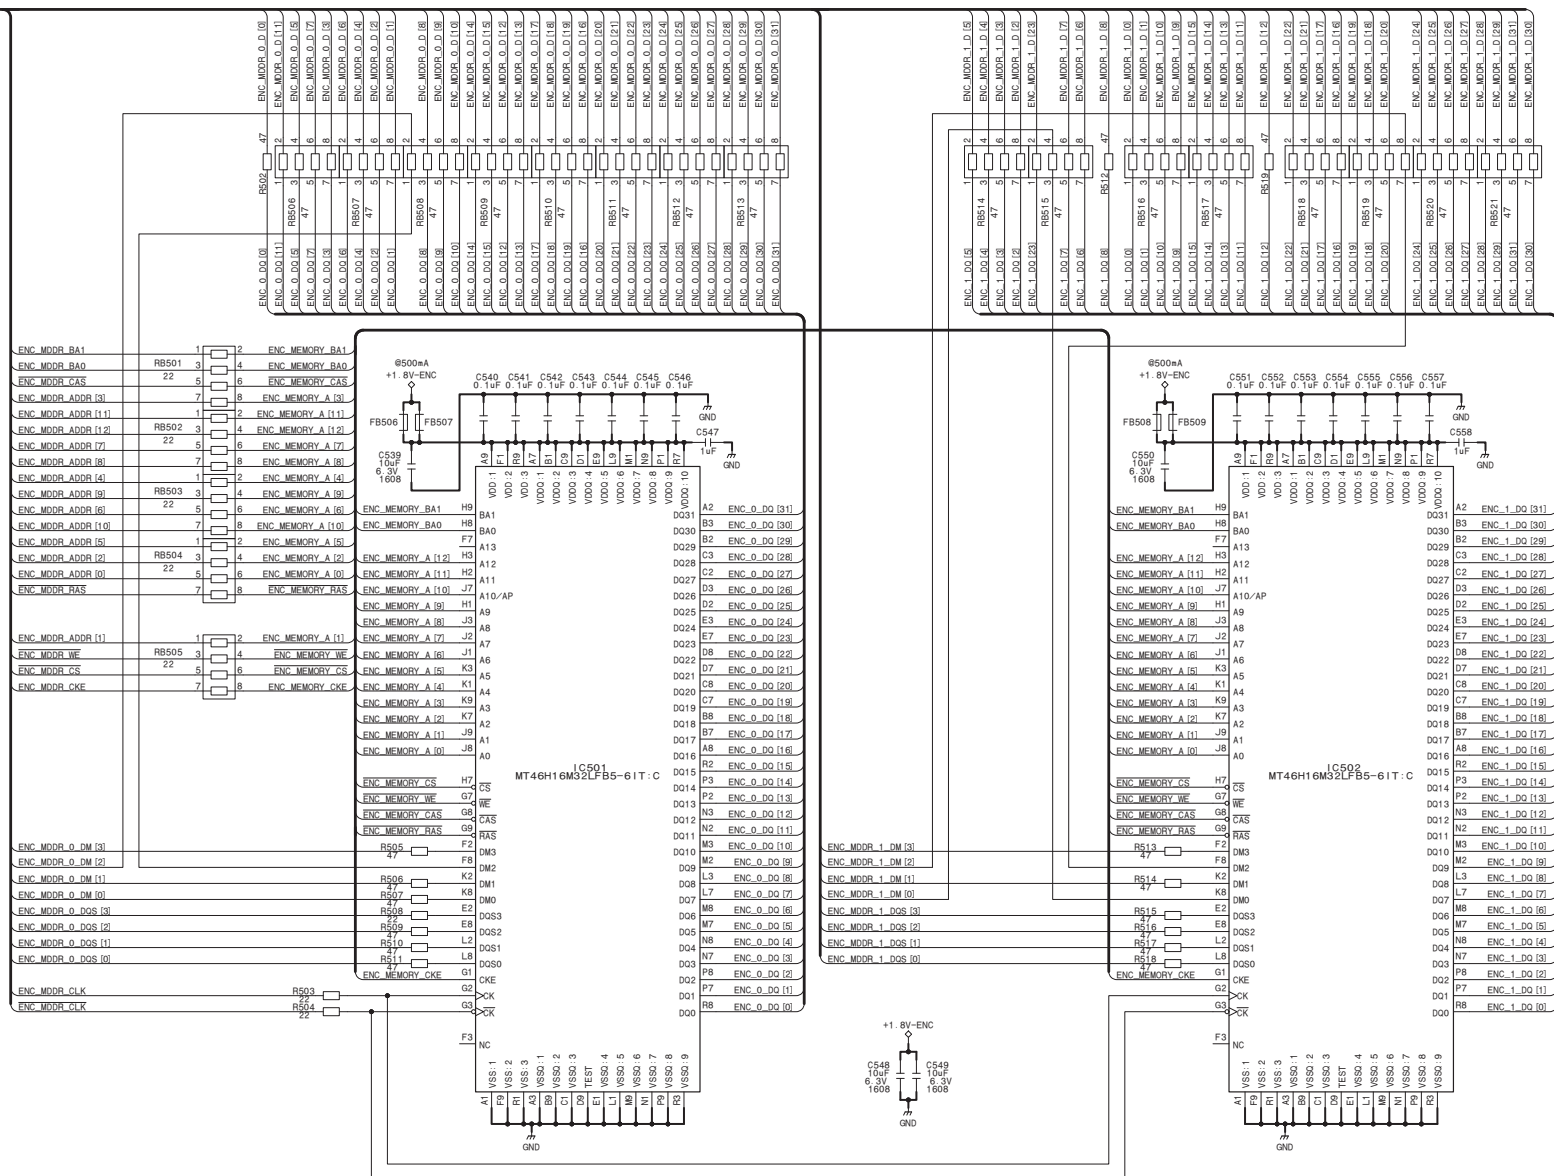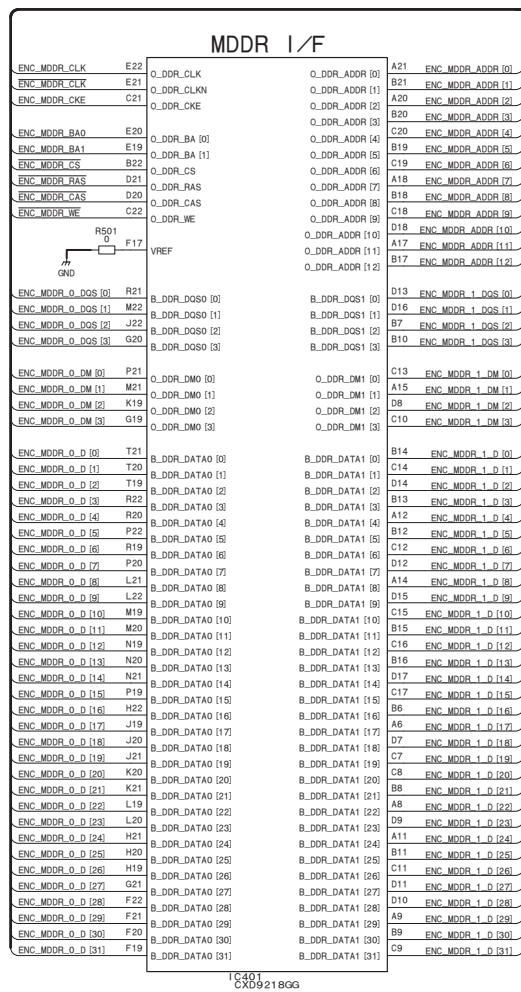


Daytona Return Stream ENC (2/2) /MDDR


DM-152 (5/19)


BOARD NO. 1-889-621-11
DM-152_5

DM-152 (6/19)_L

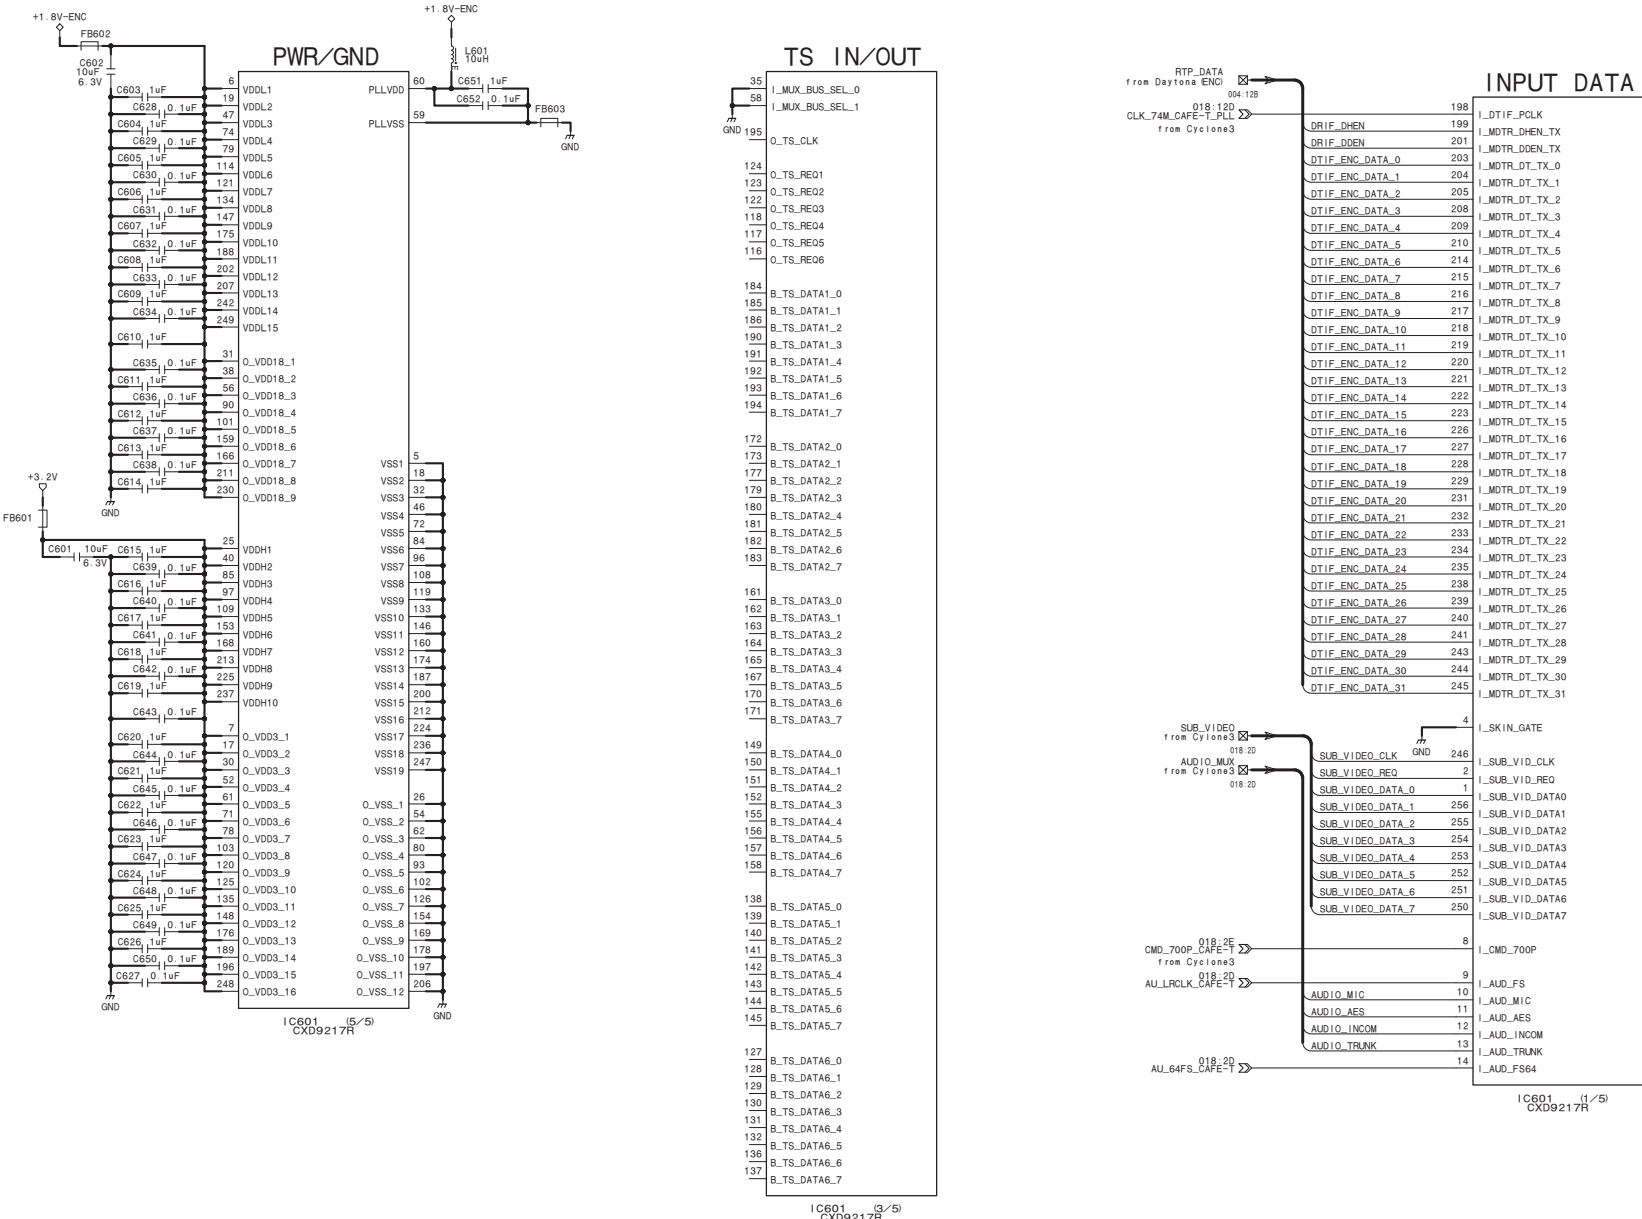


DM-152 _6

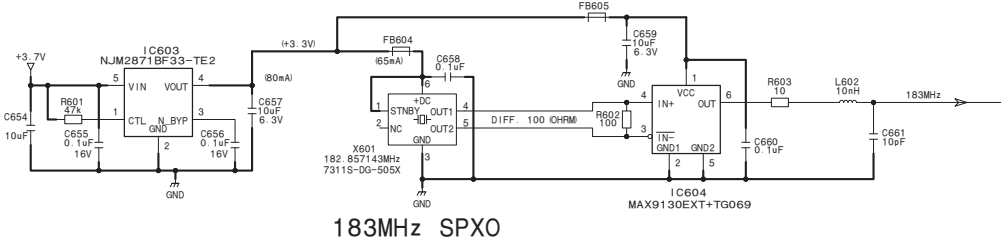



DM-152 (7/19)

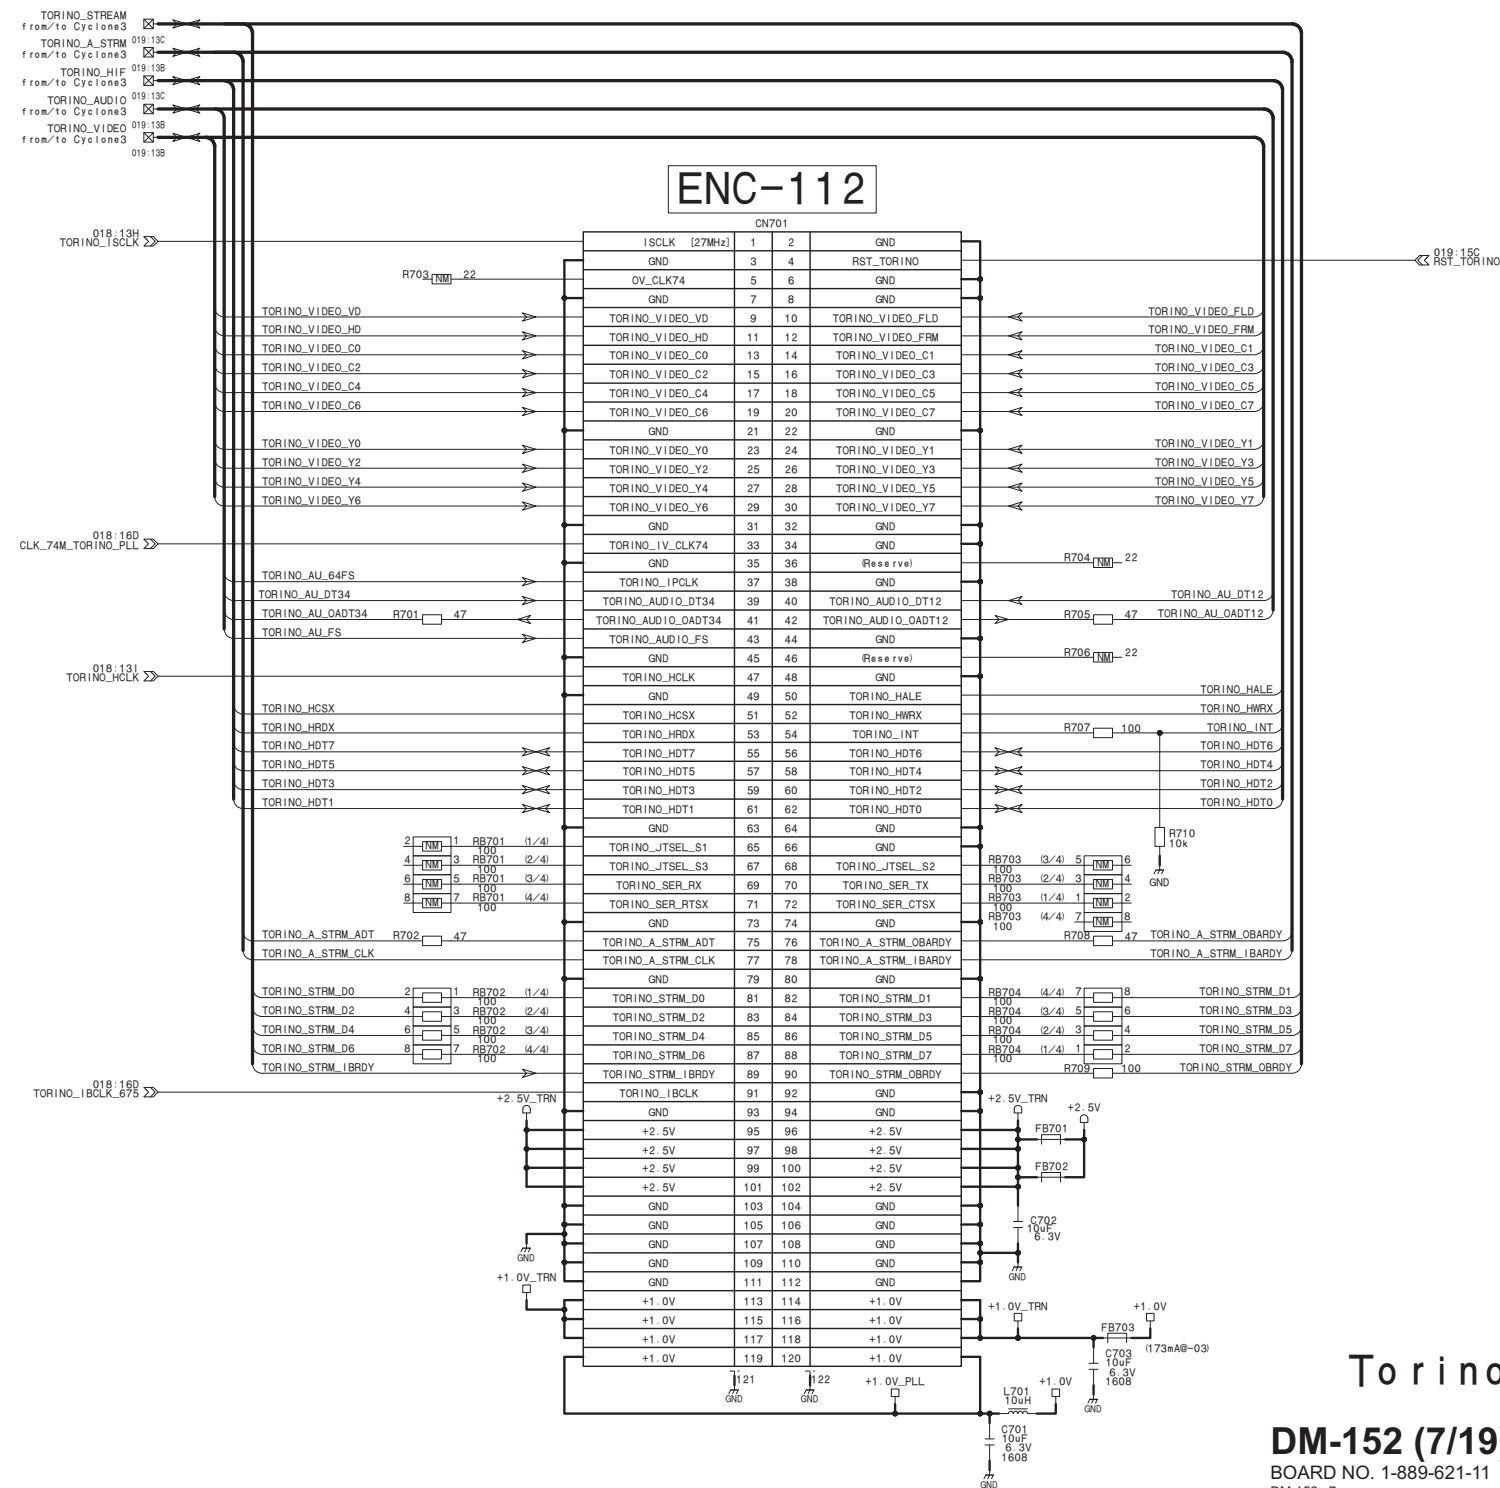




Torino

DM-152 (7/19)

BOARD NO. 1-889-621-11

DM-152_7



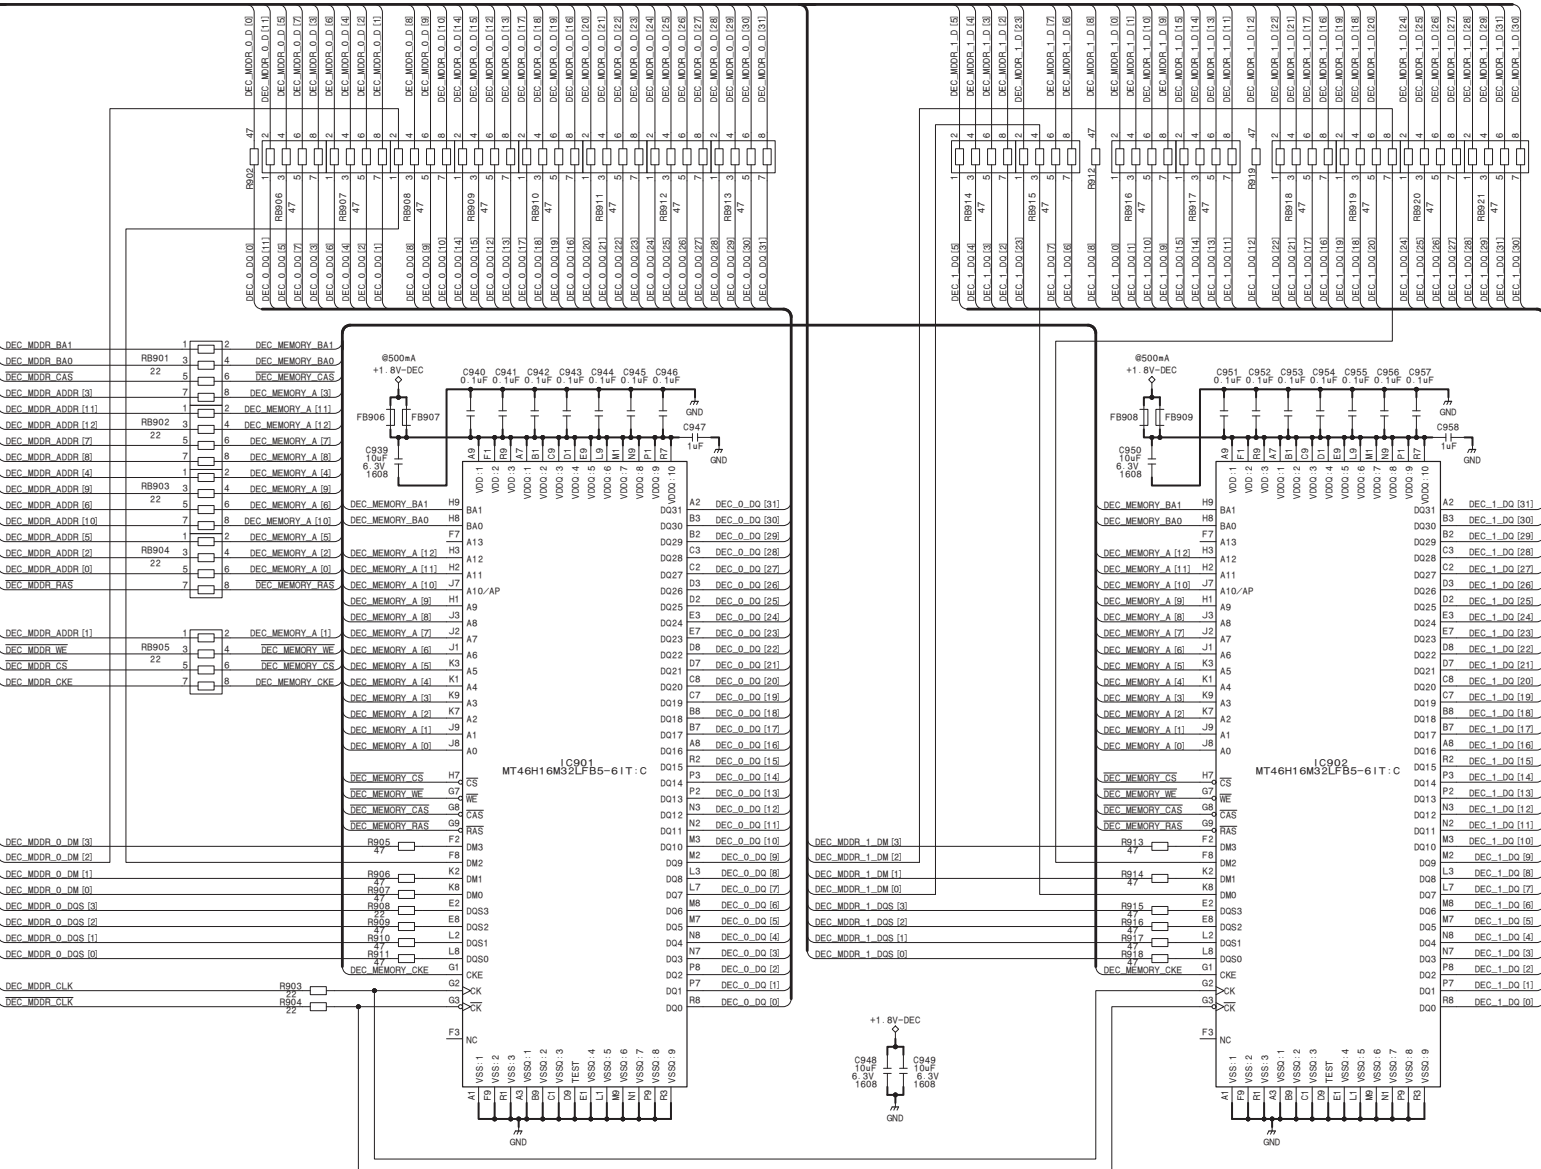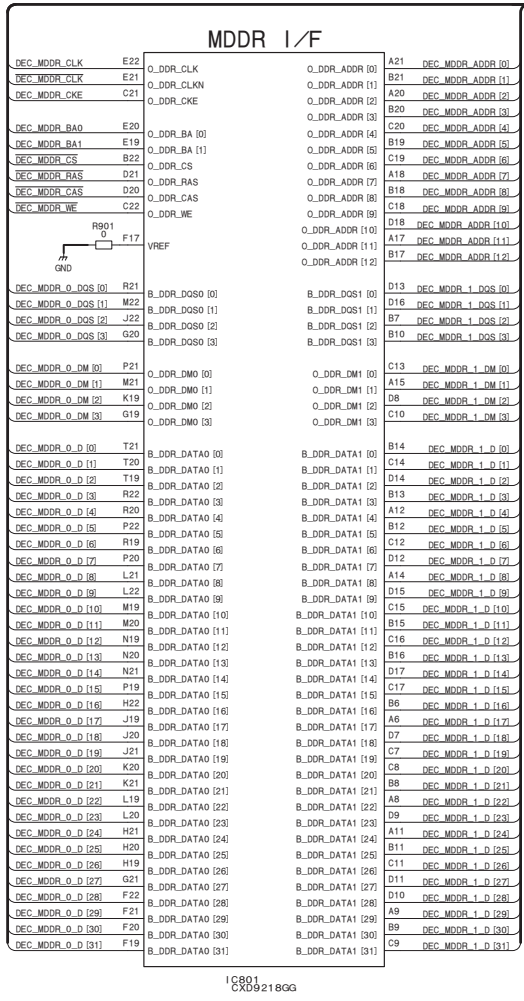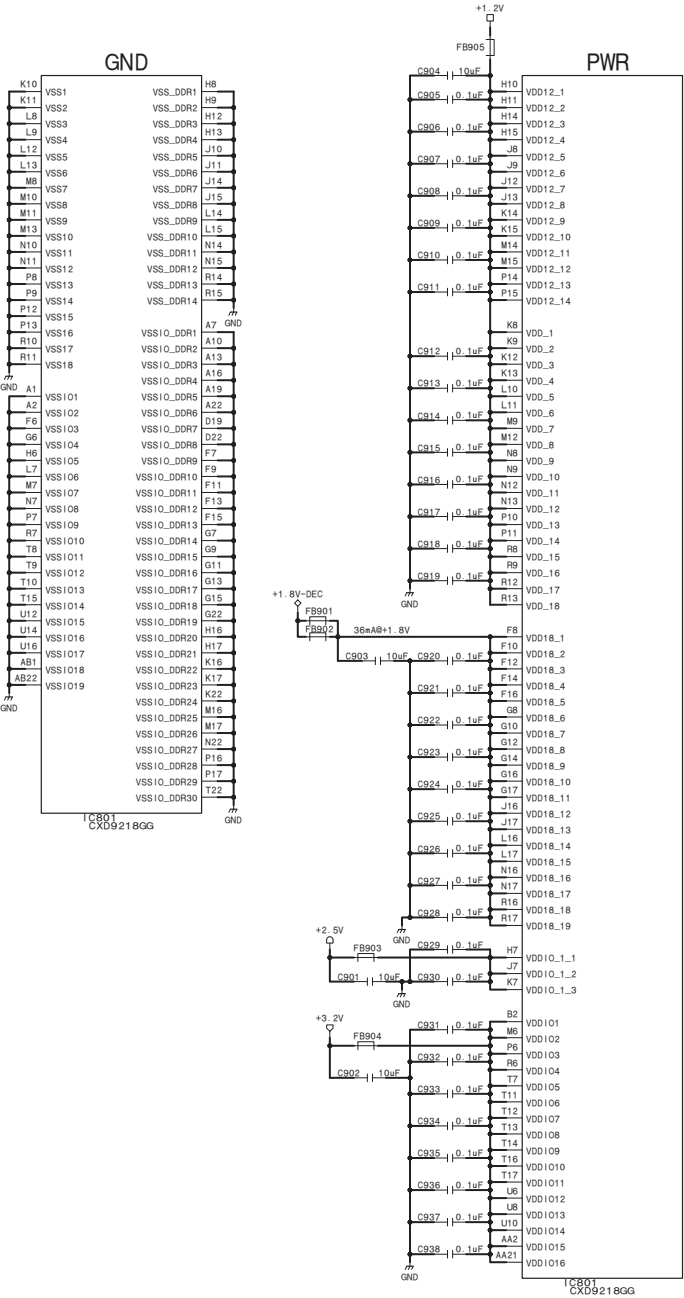


Daytona Main Stream DEC (2/2) /MDDR

DM-152 (9/19)


BOARD NO. 1-889-621-11

DM-152_9

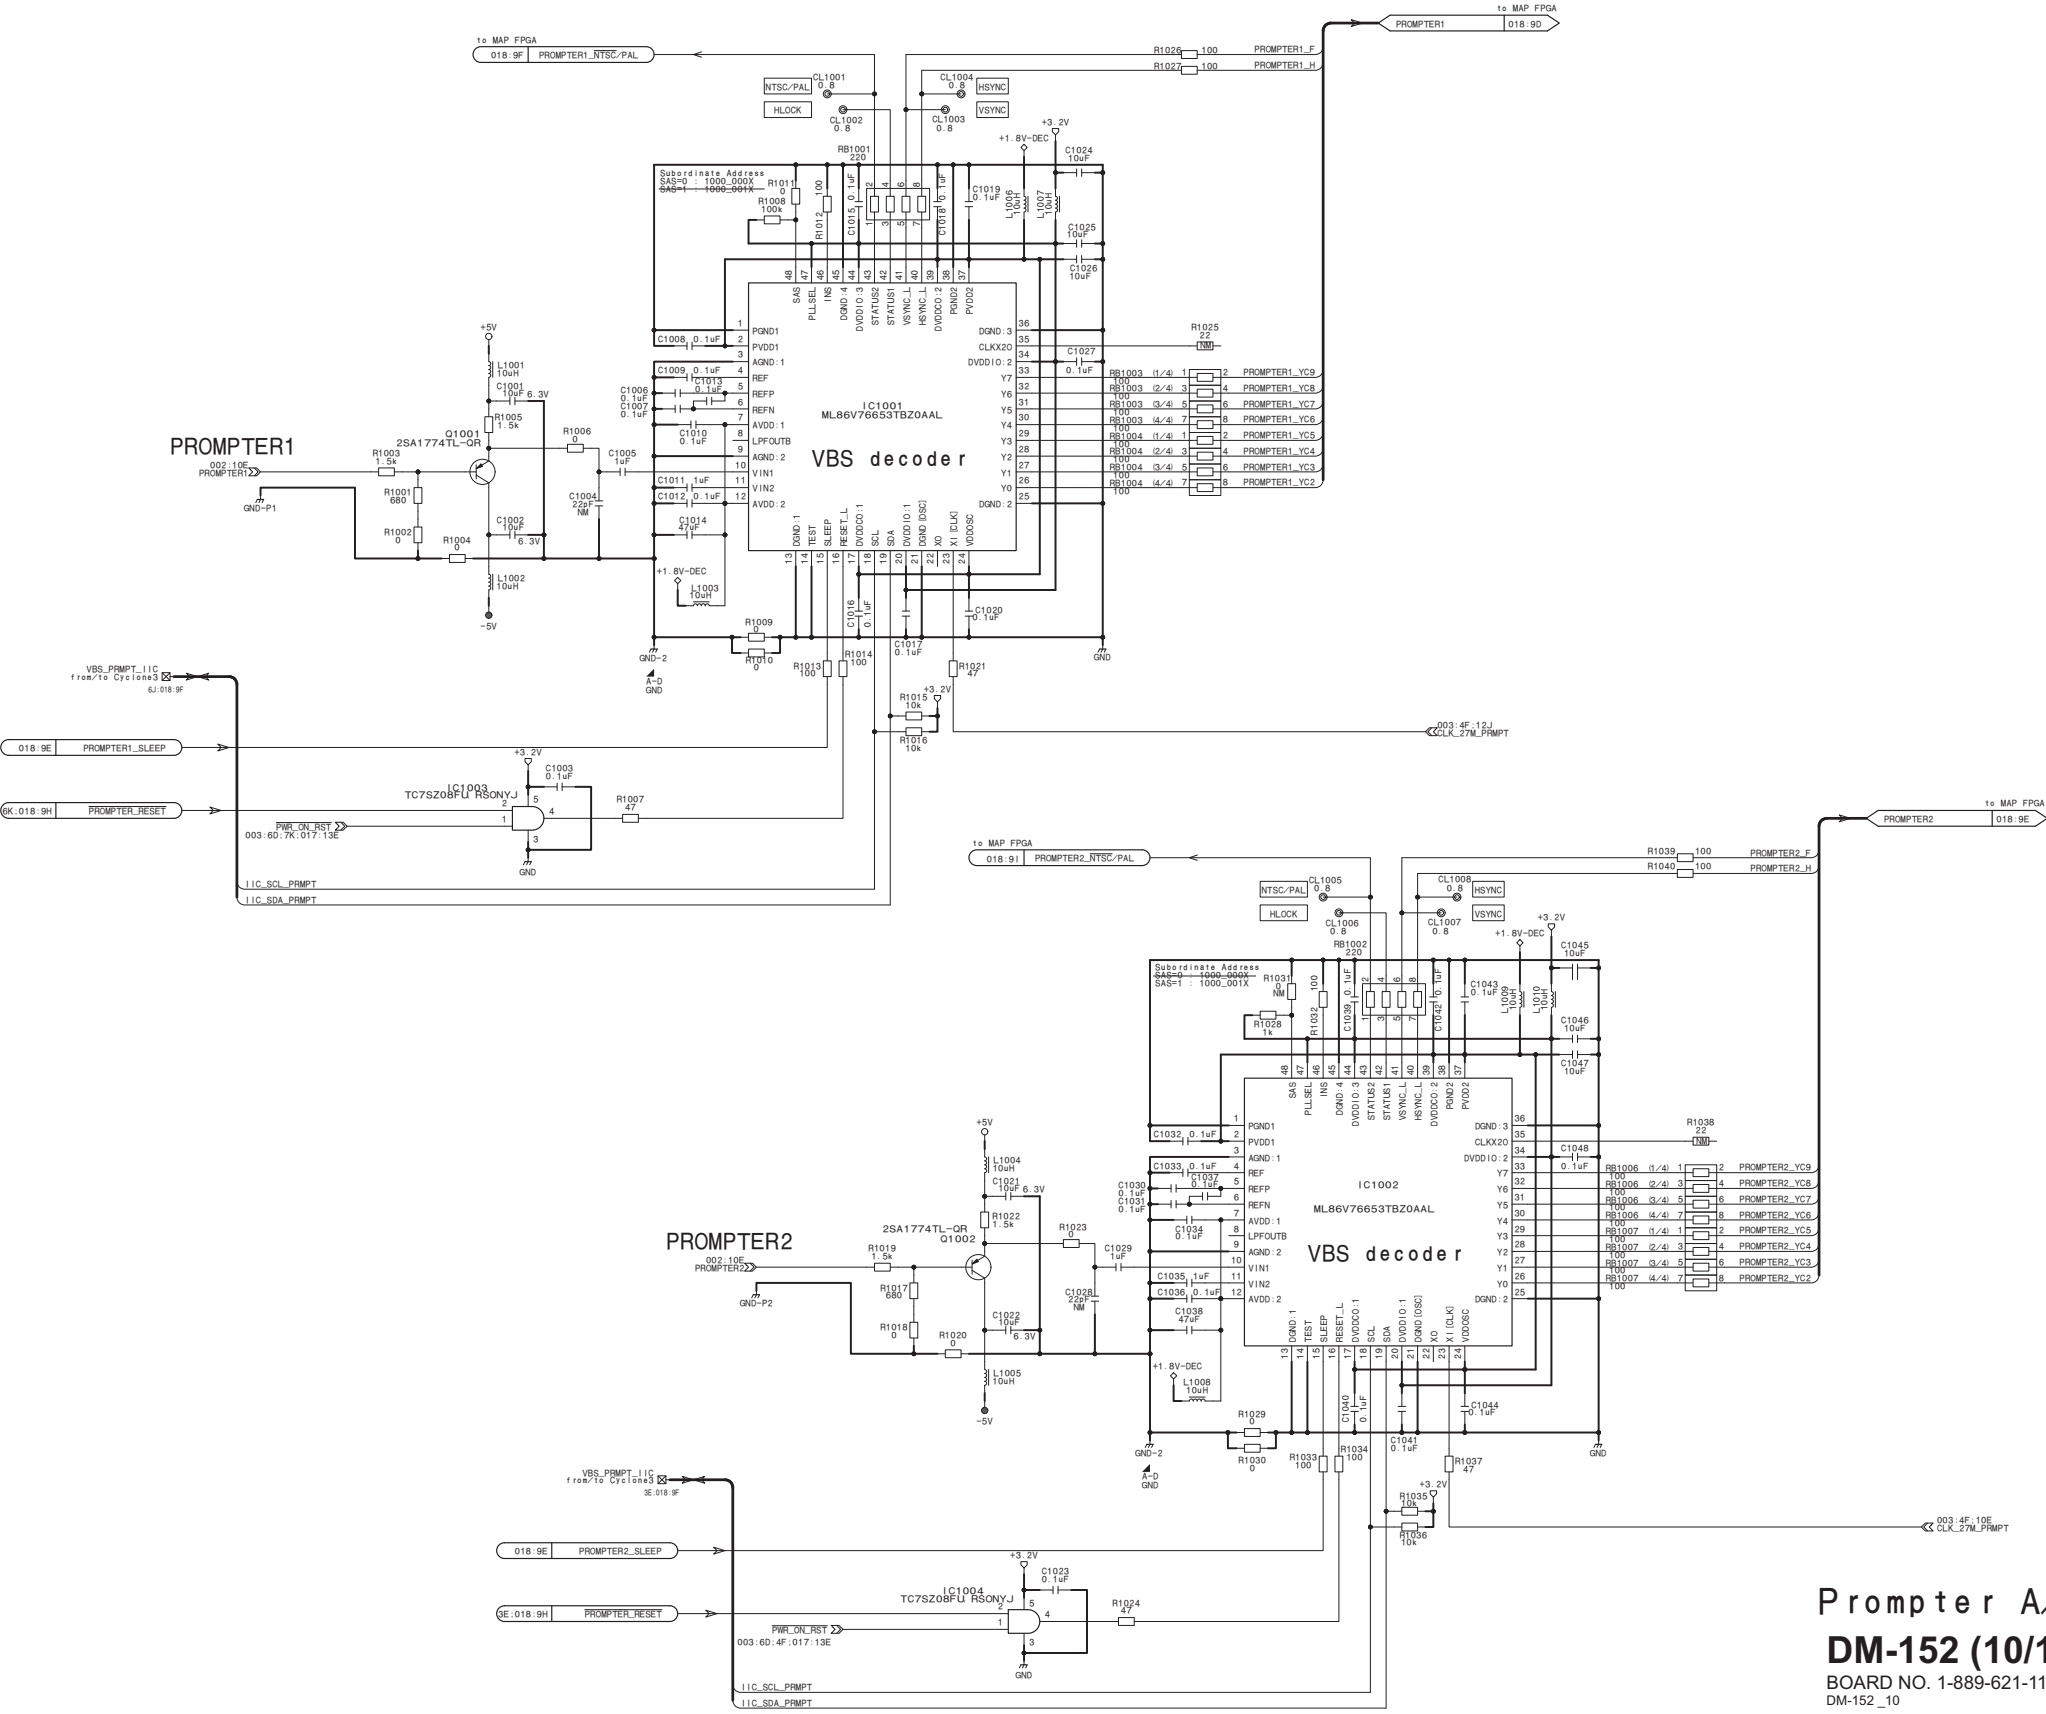

Prompter A/D
DM-152 (10/19)
BOARD NO. 1-889-621-11
DM-152_10

DM-152 (11/19)

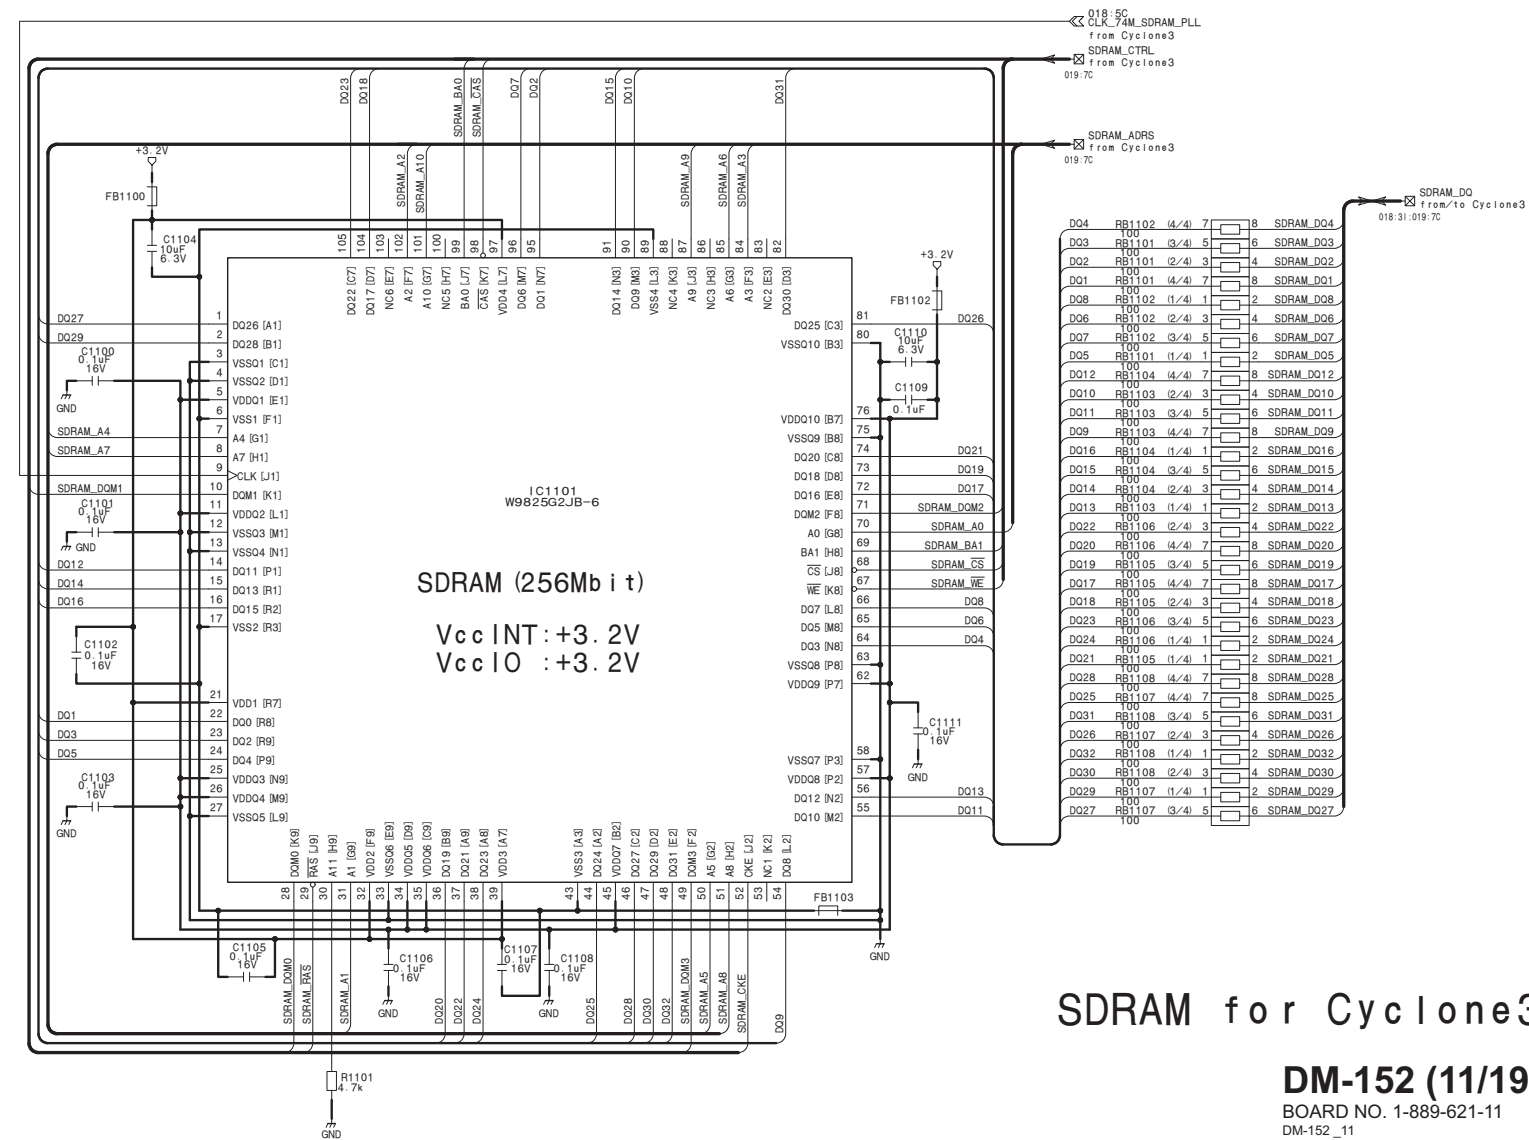



SDRAM for Cyclone3


DM-152 (11/19)

BOARD NO. 1-889-621-11
DM-152__11

DM-152 (12/19)_L




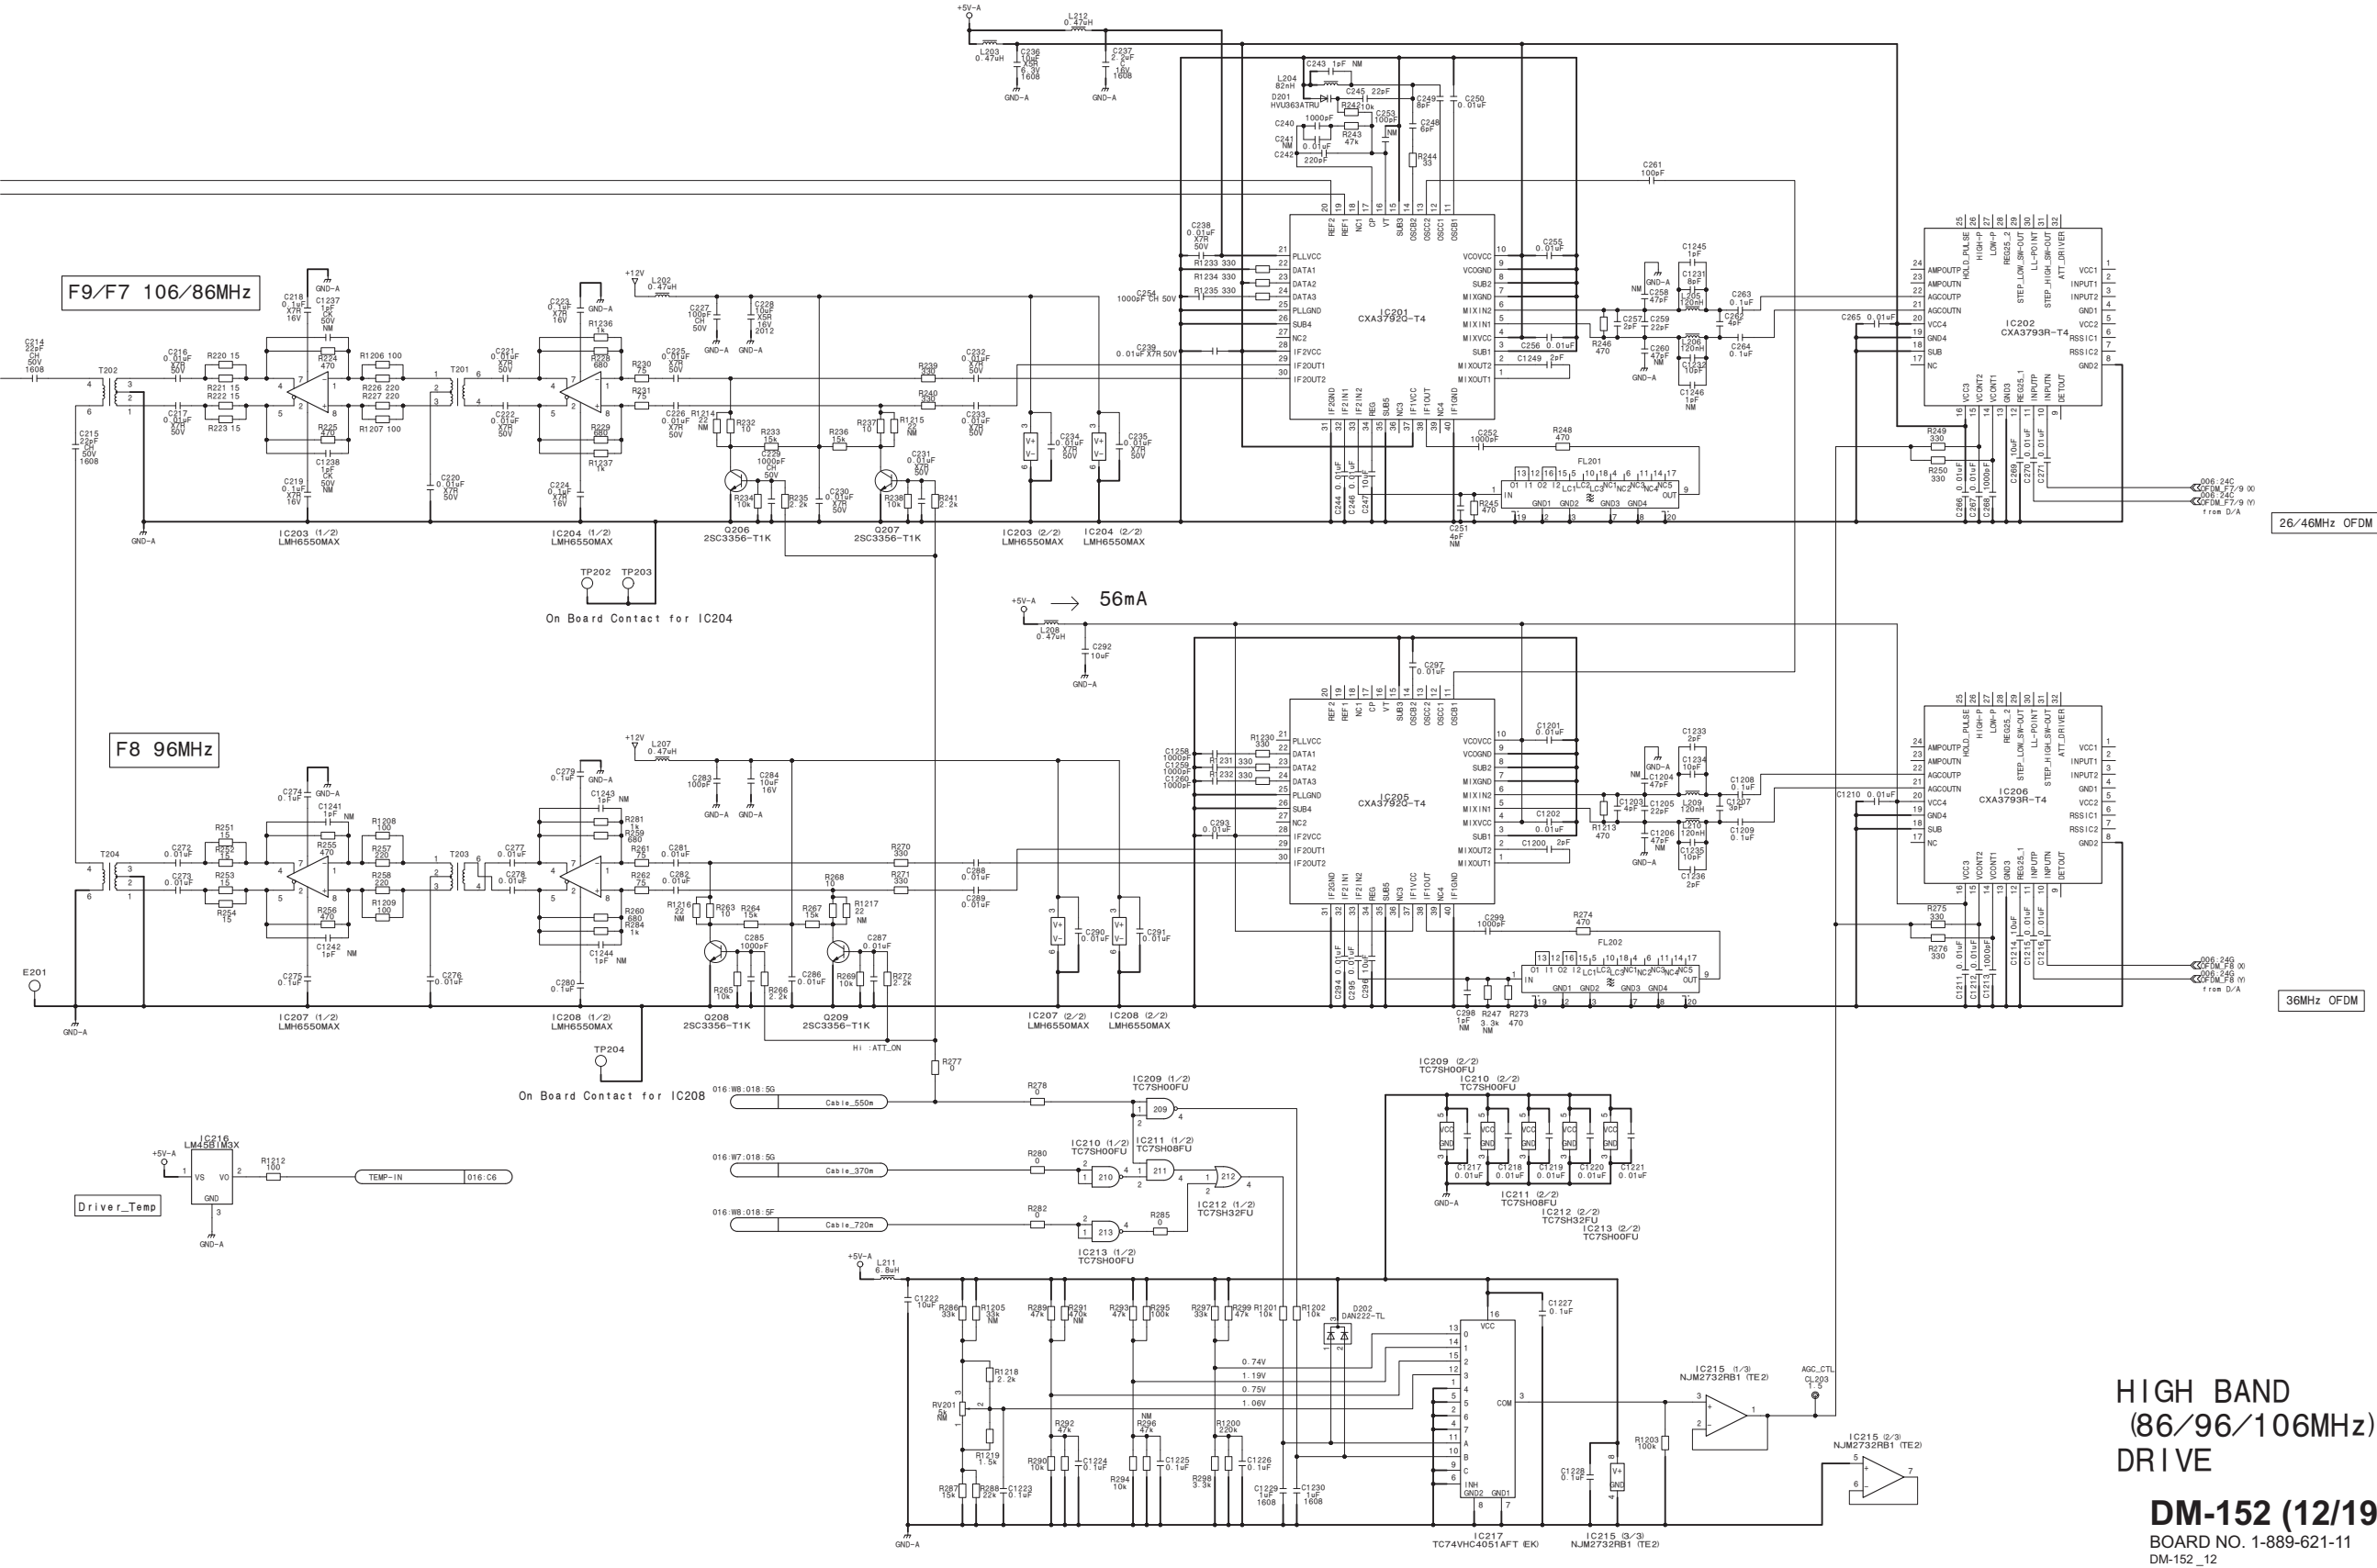


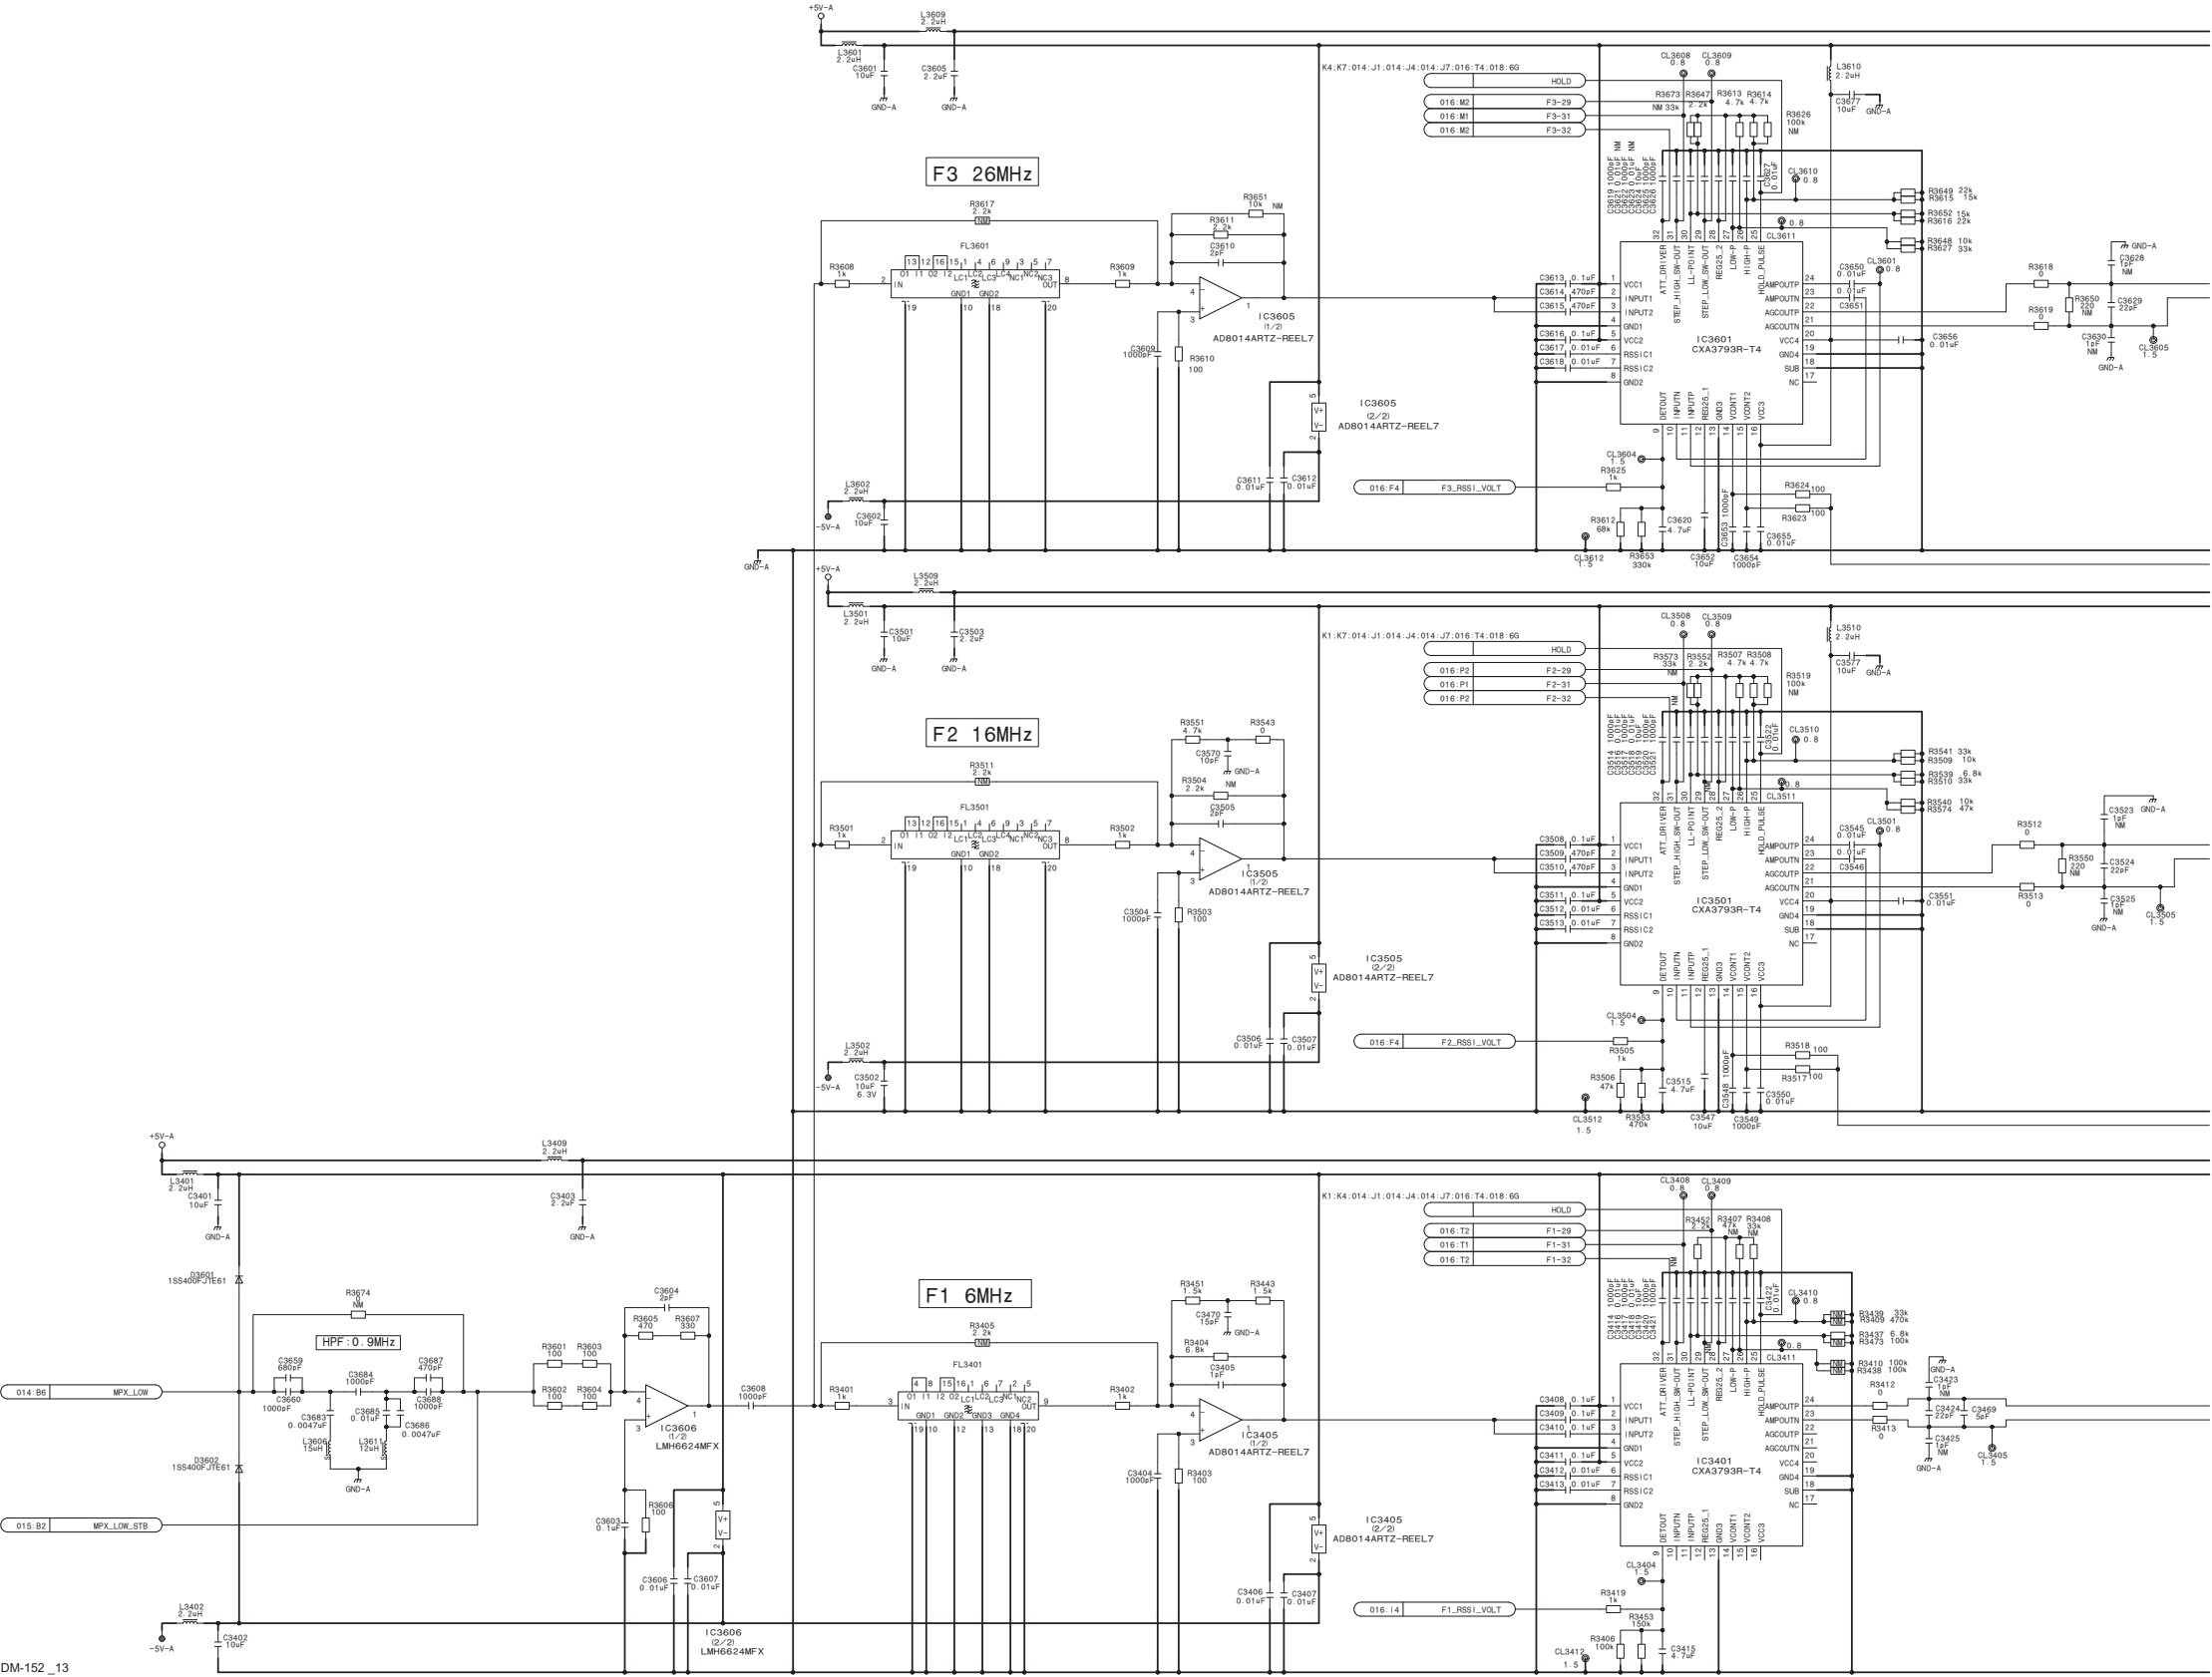

DM-152_13


DM-152 (13/19)_R

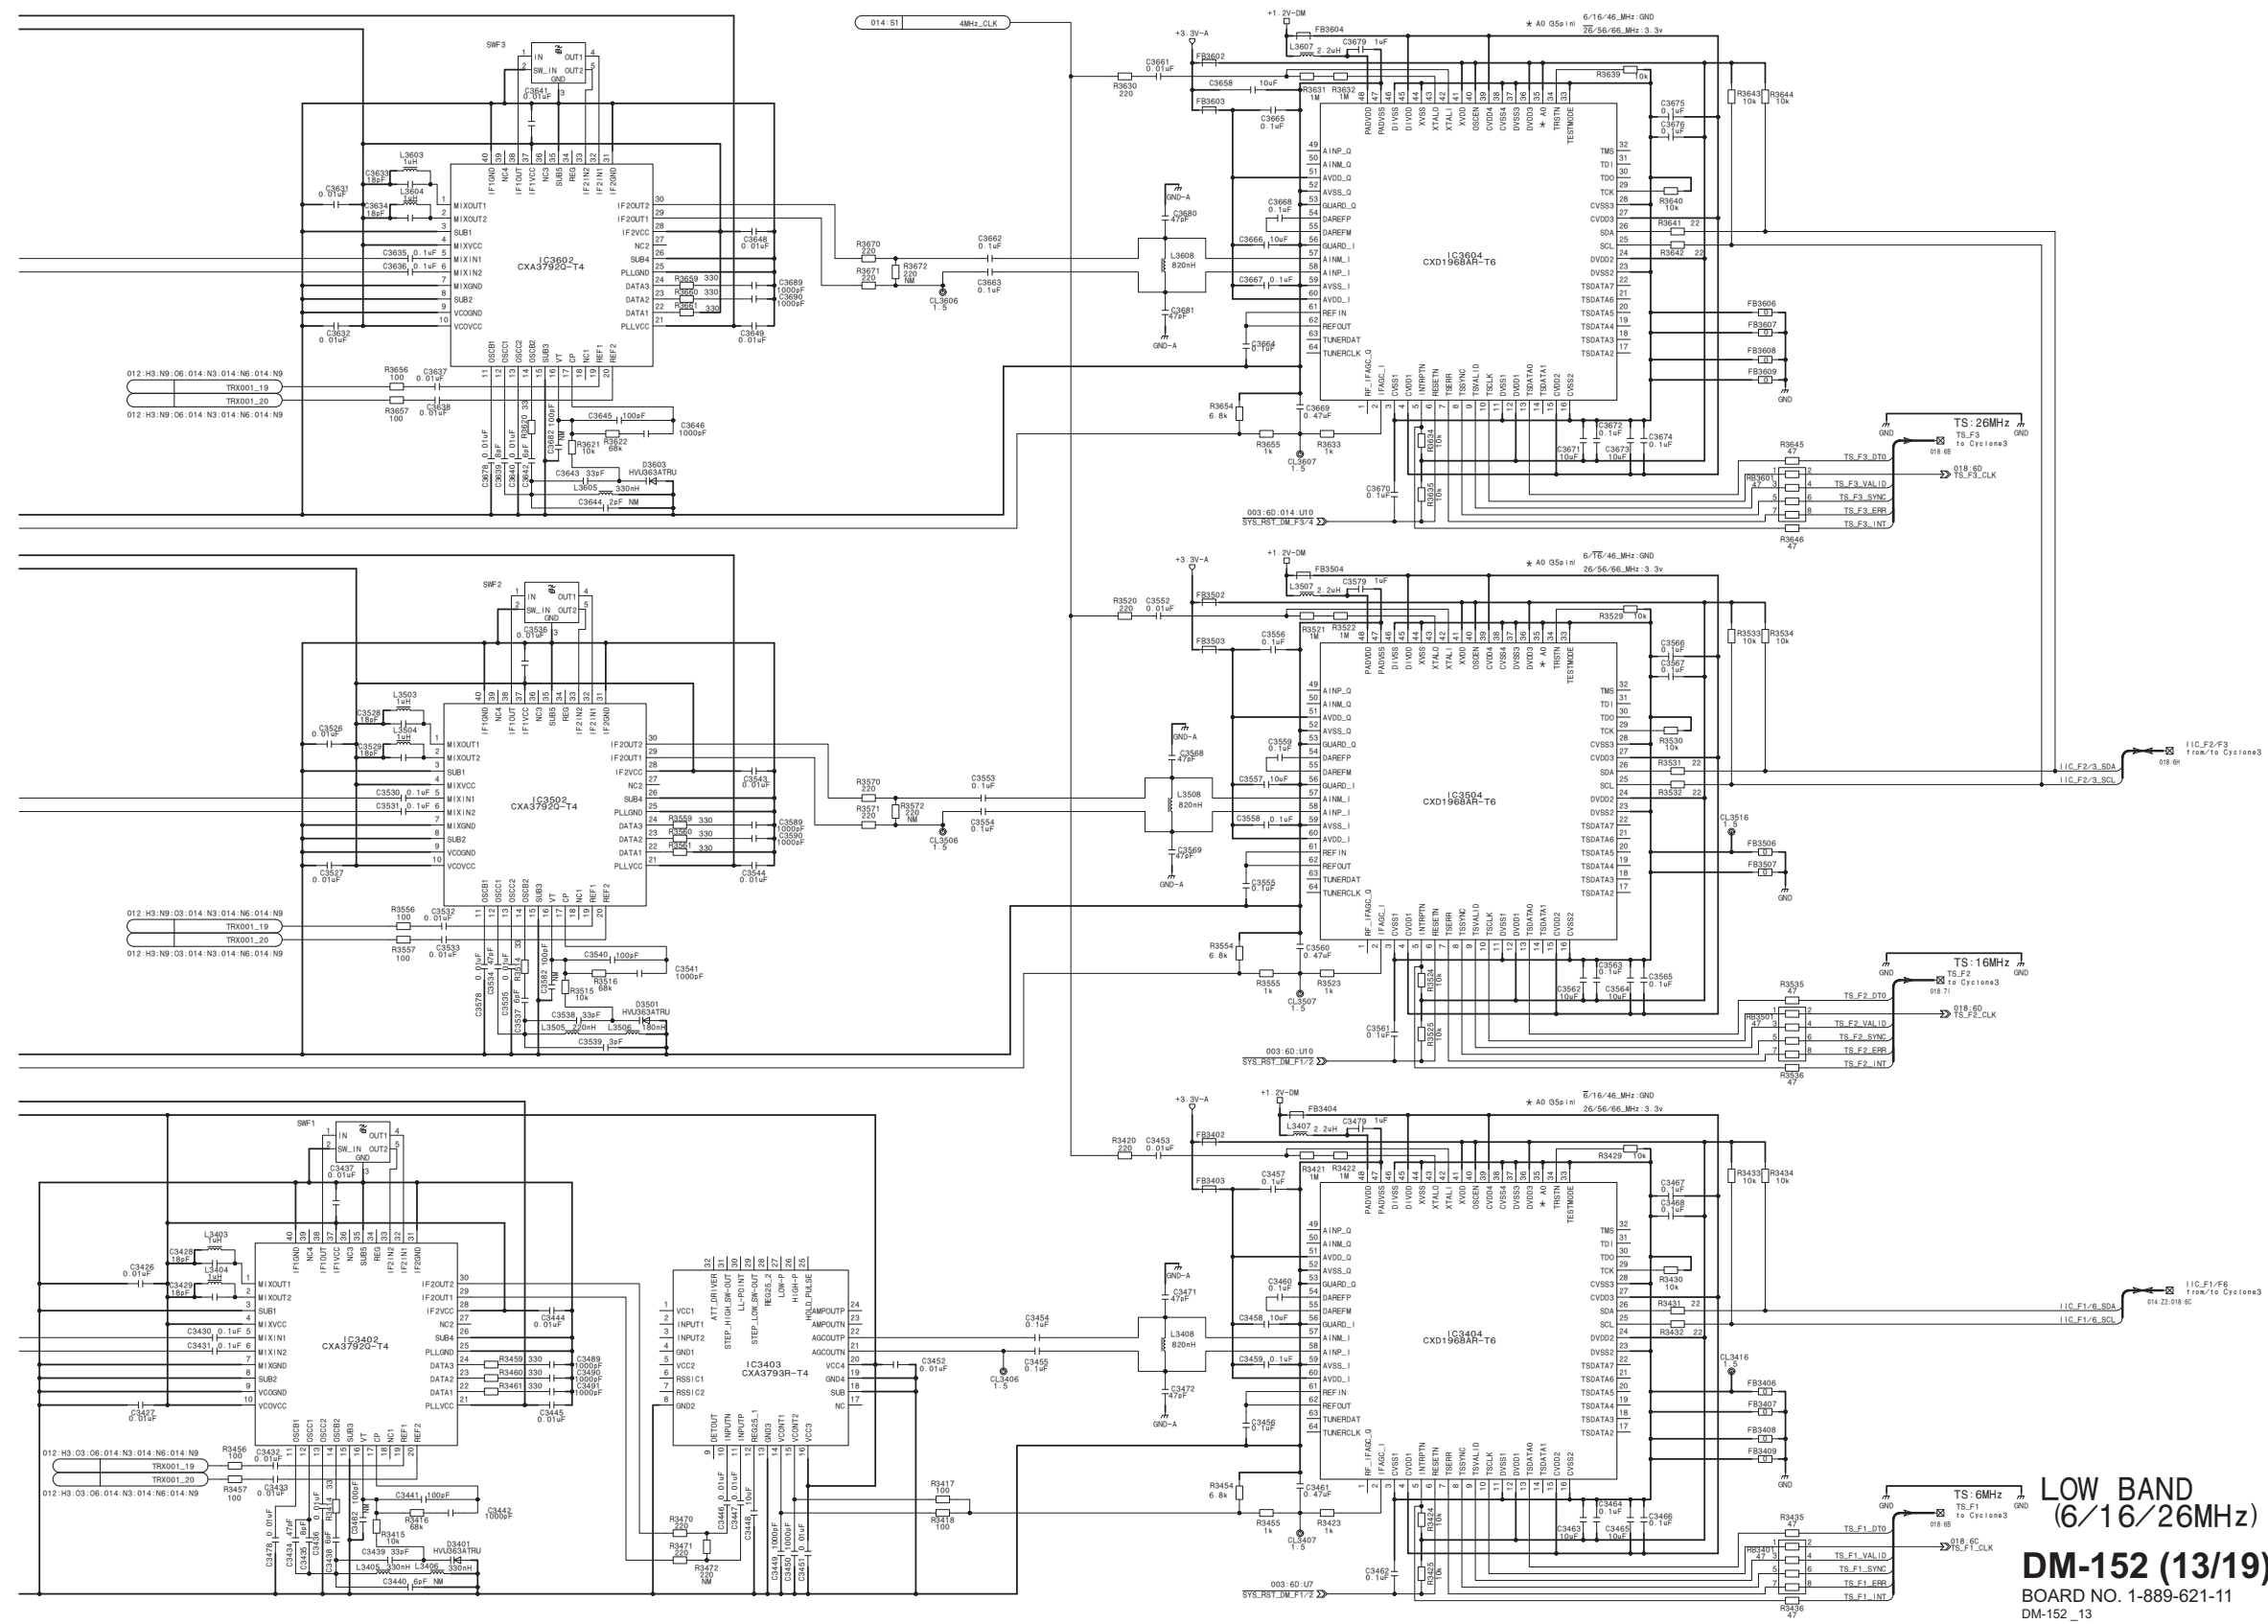

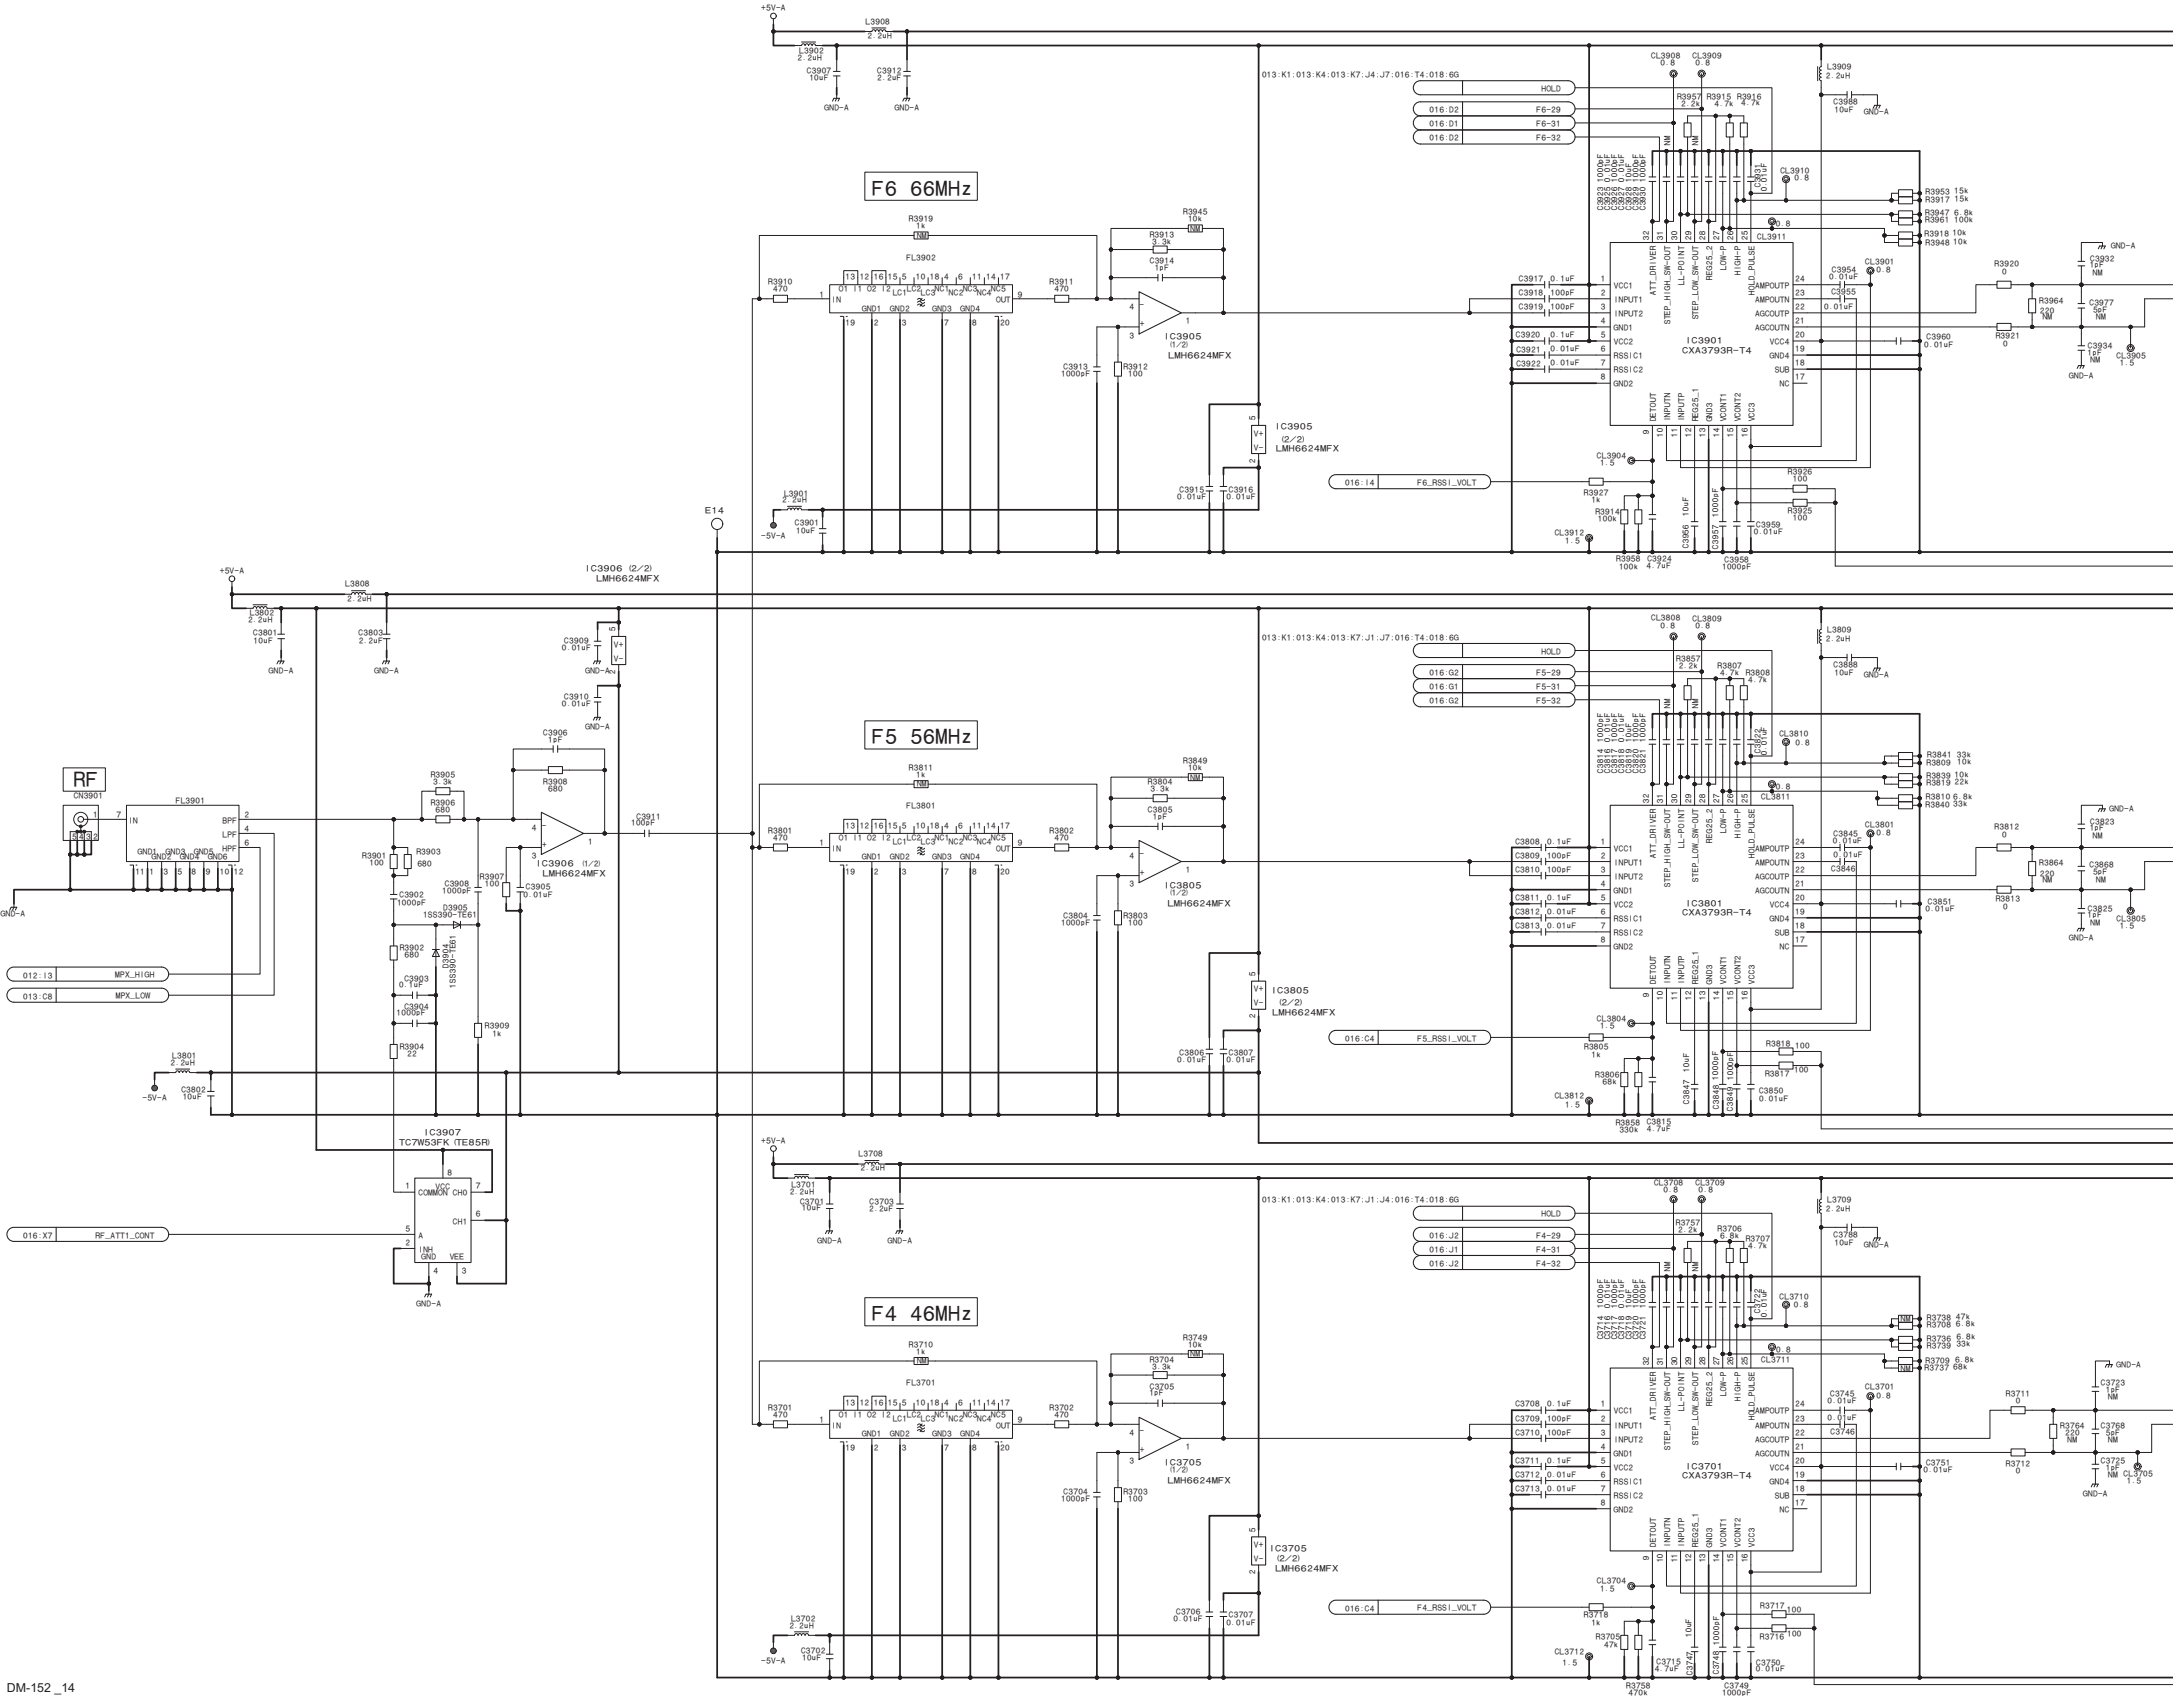


DM-152 _14

DM-152 (14/19)_R

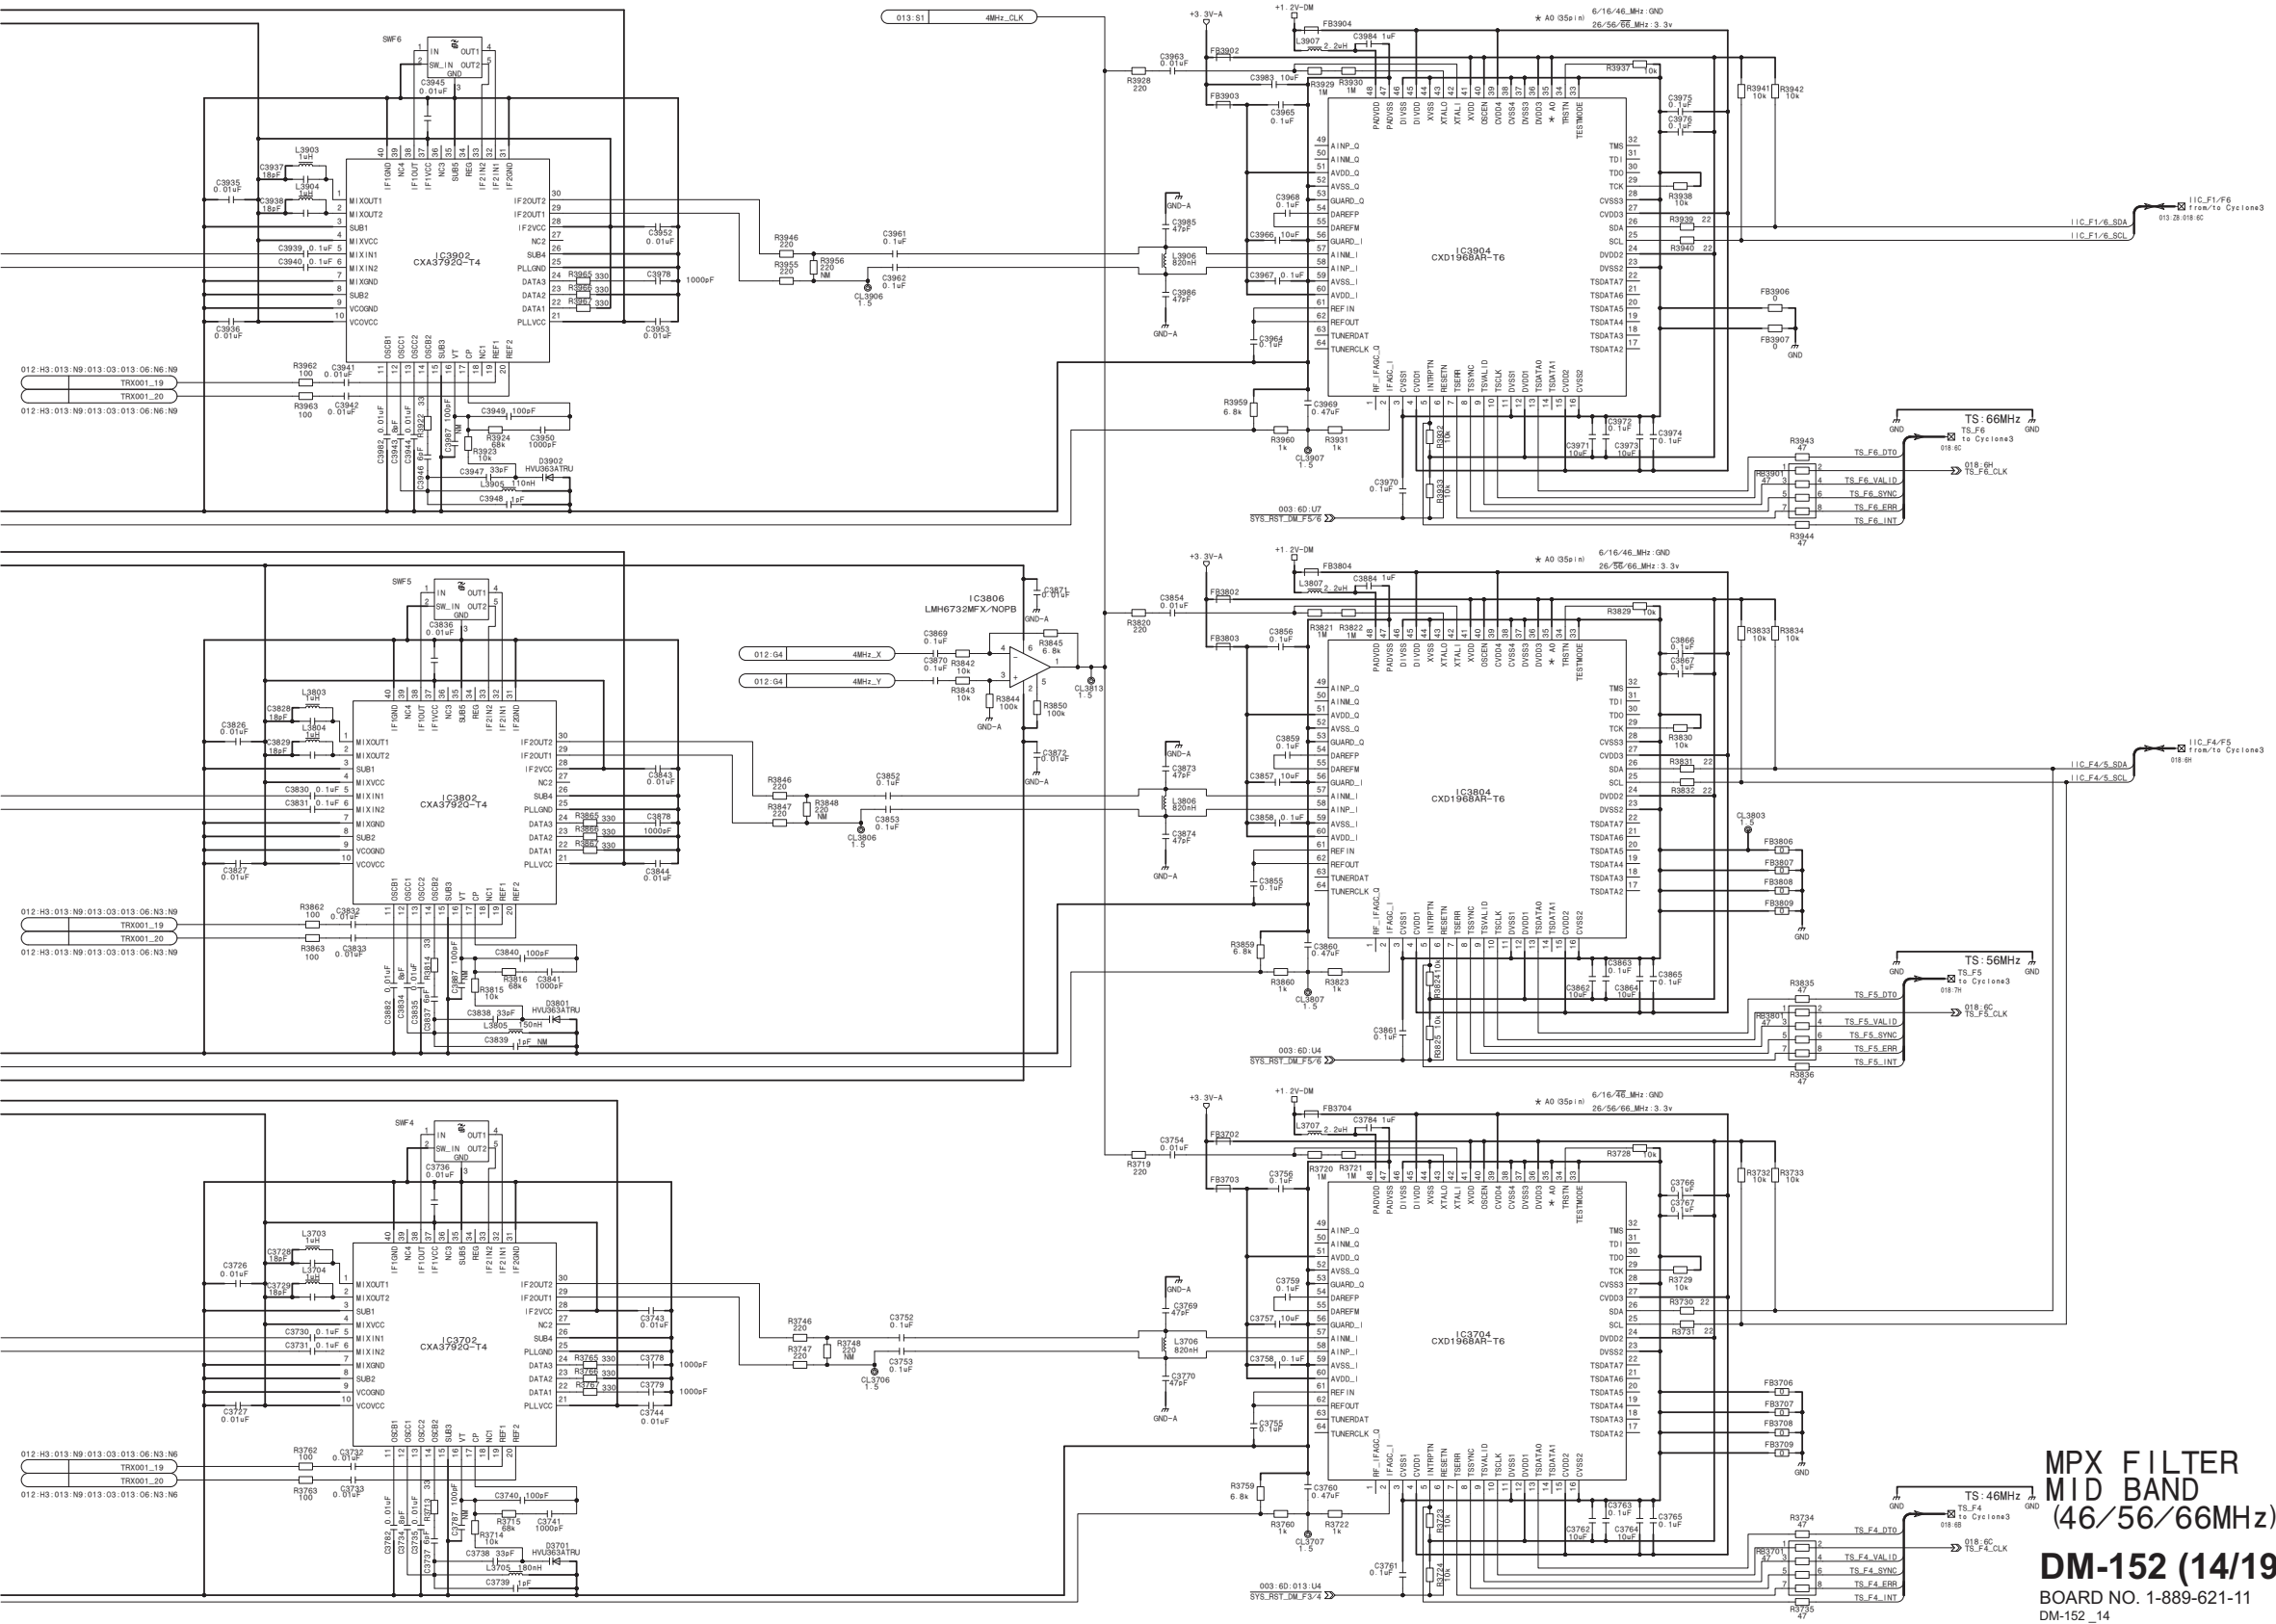


MPX FILTER
MID BAND
(46/56/66MHz)
DM-152 (14/19)
BOARD NO. 1-889-621-11
DM-152_14


DM-152 (15/19)_L

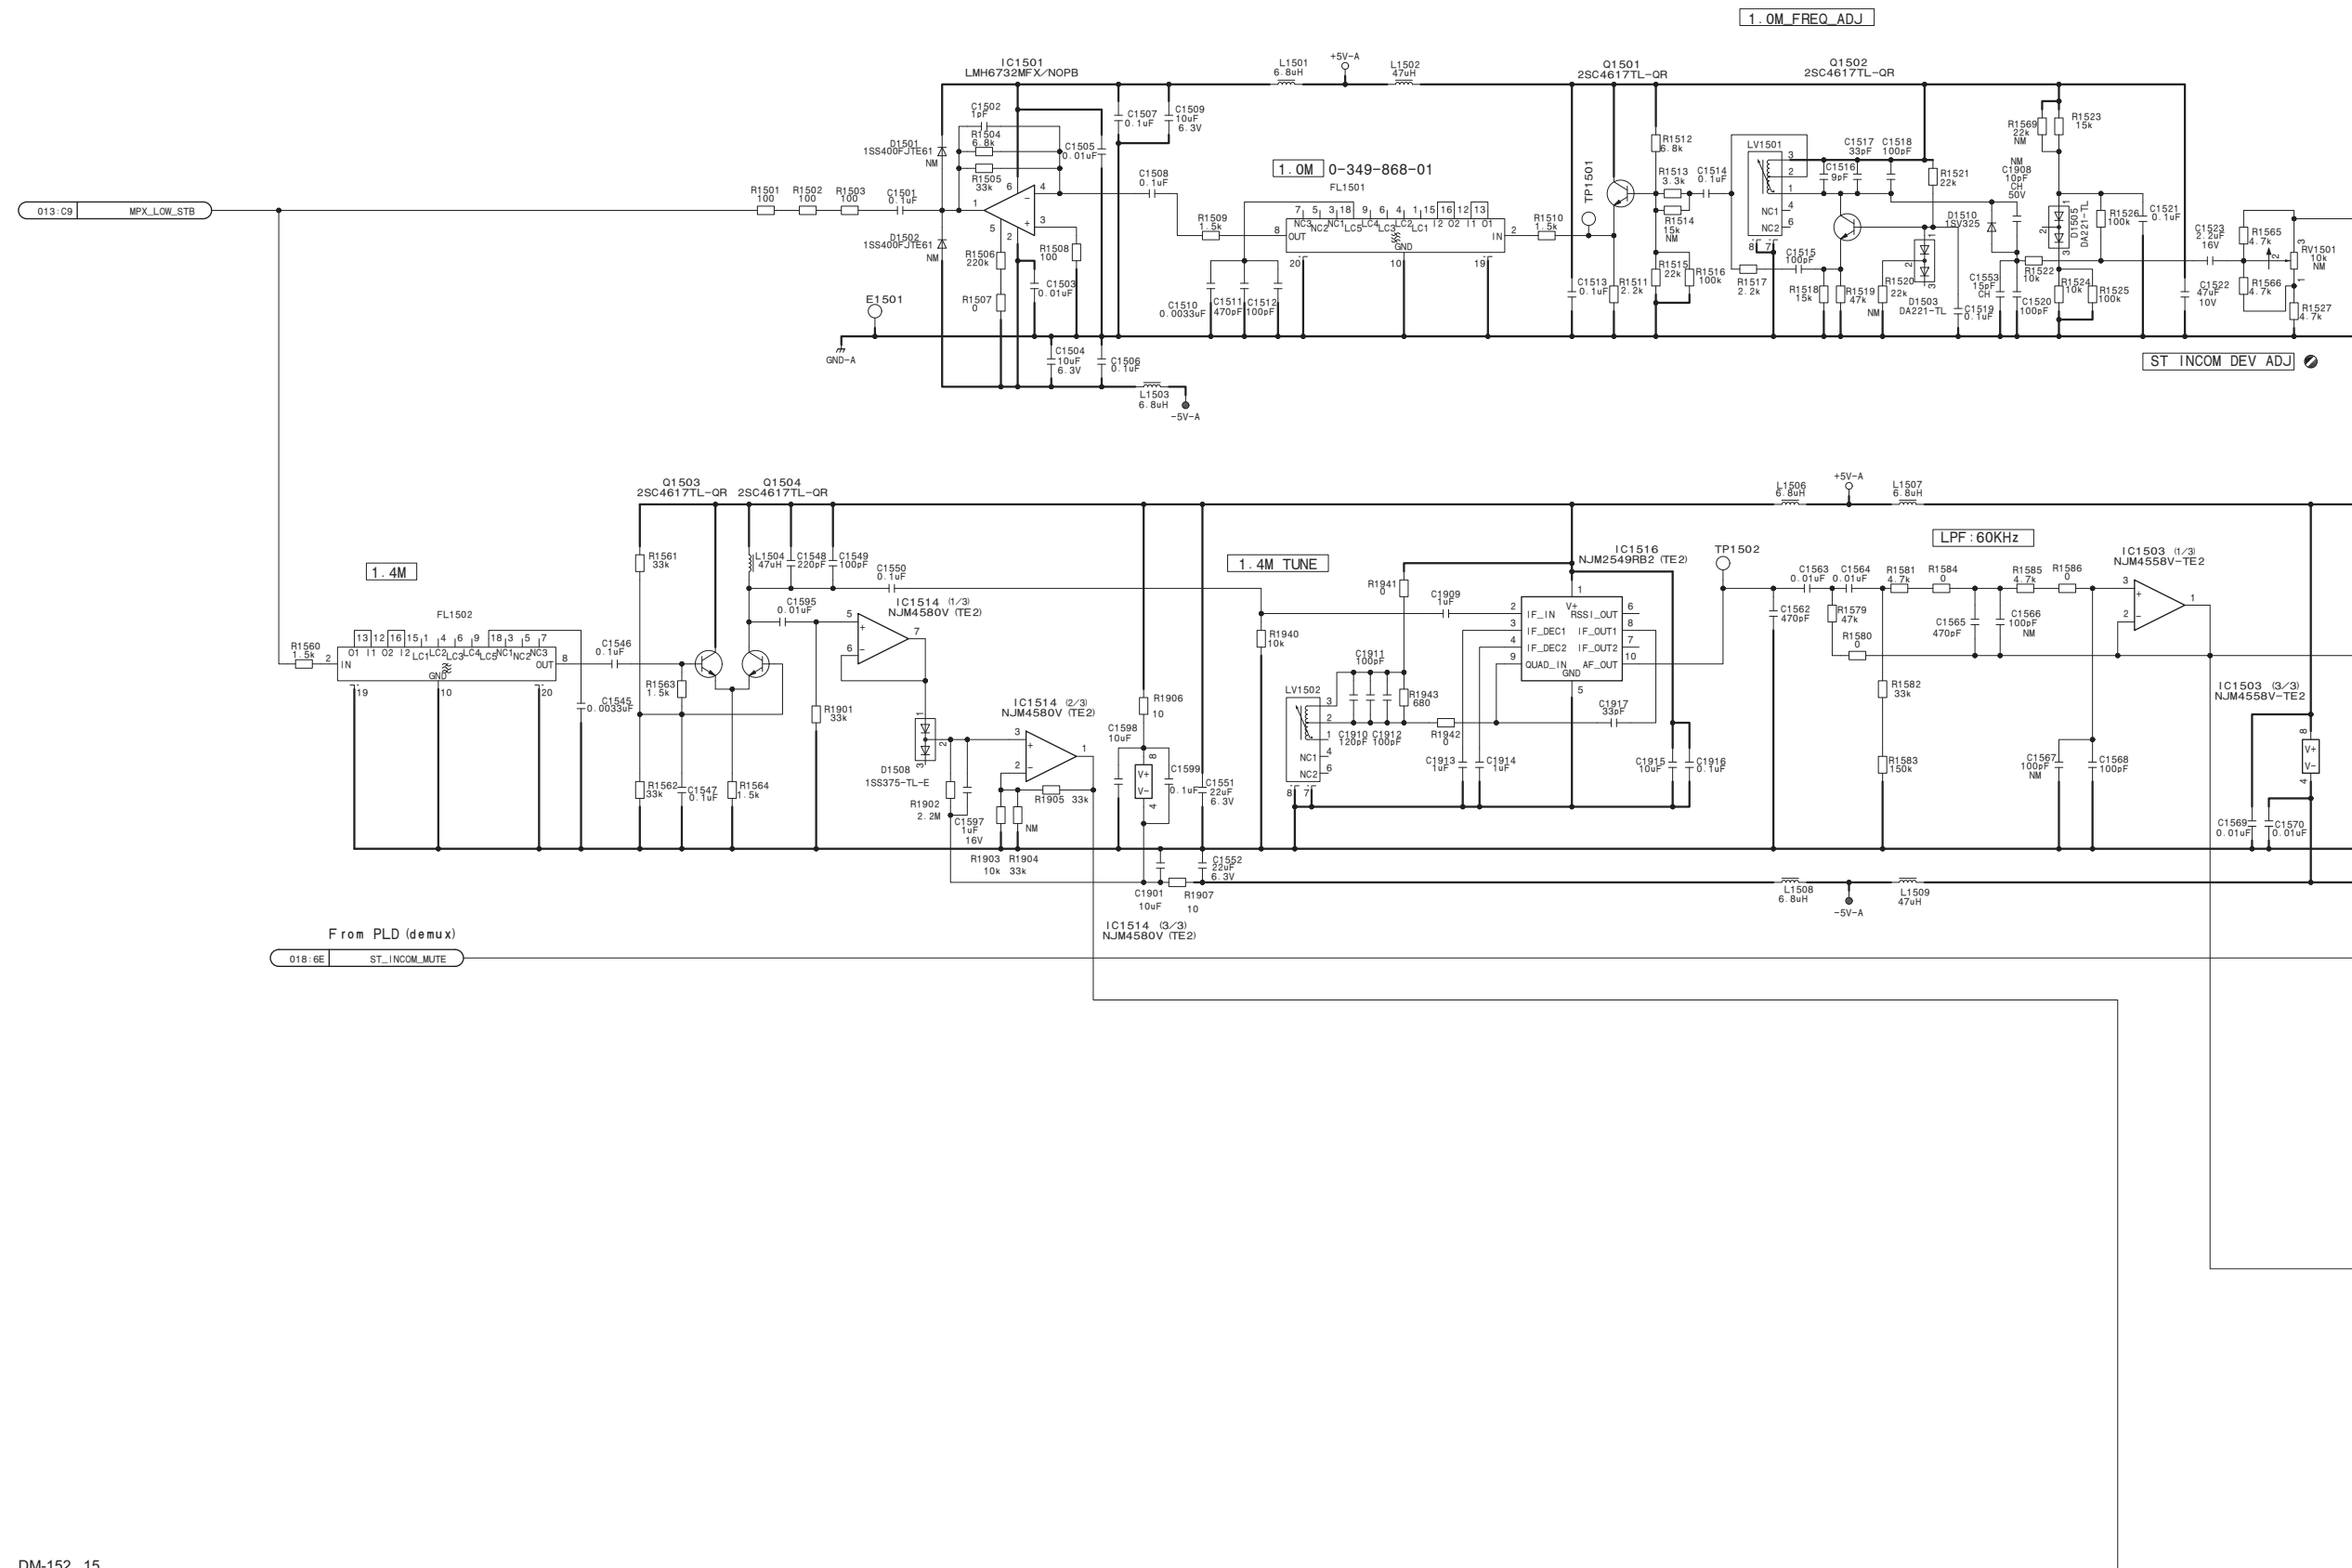


DM-152 (15/19)_R

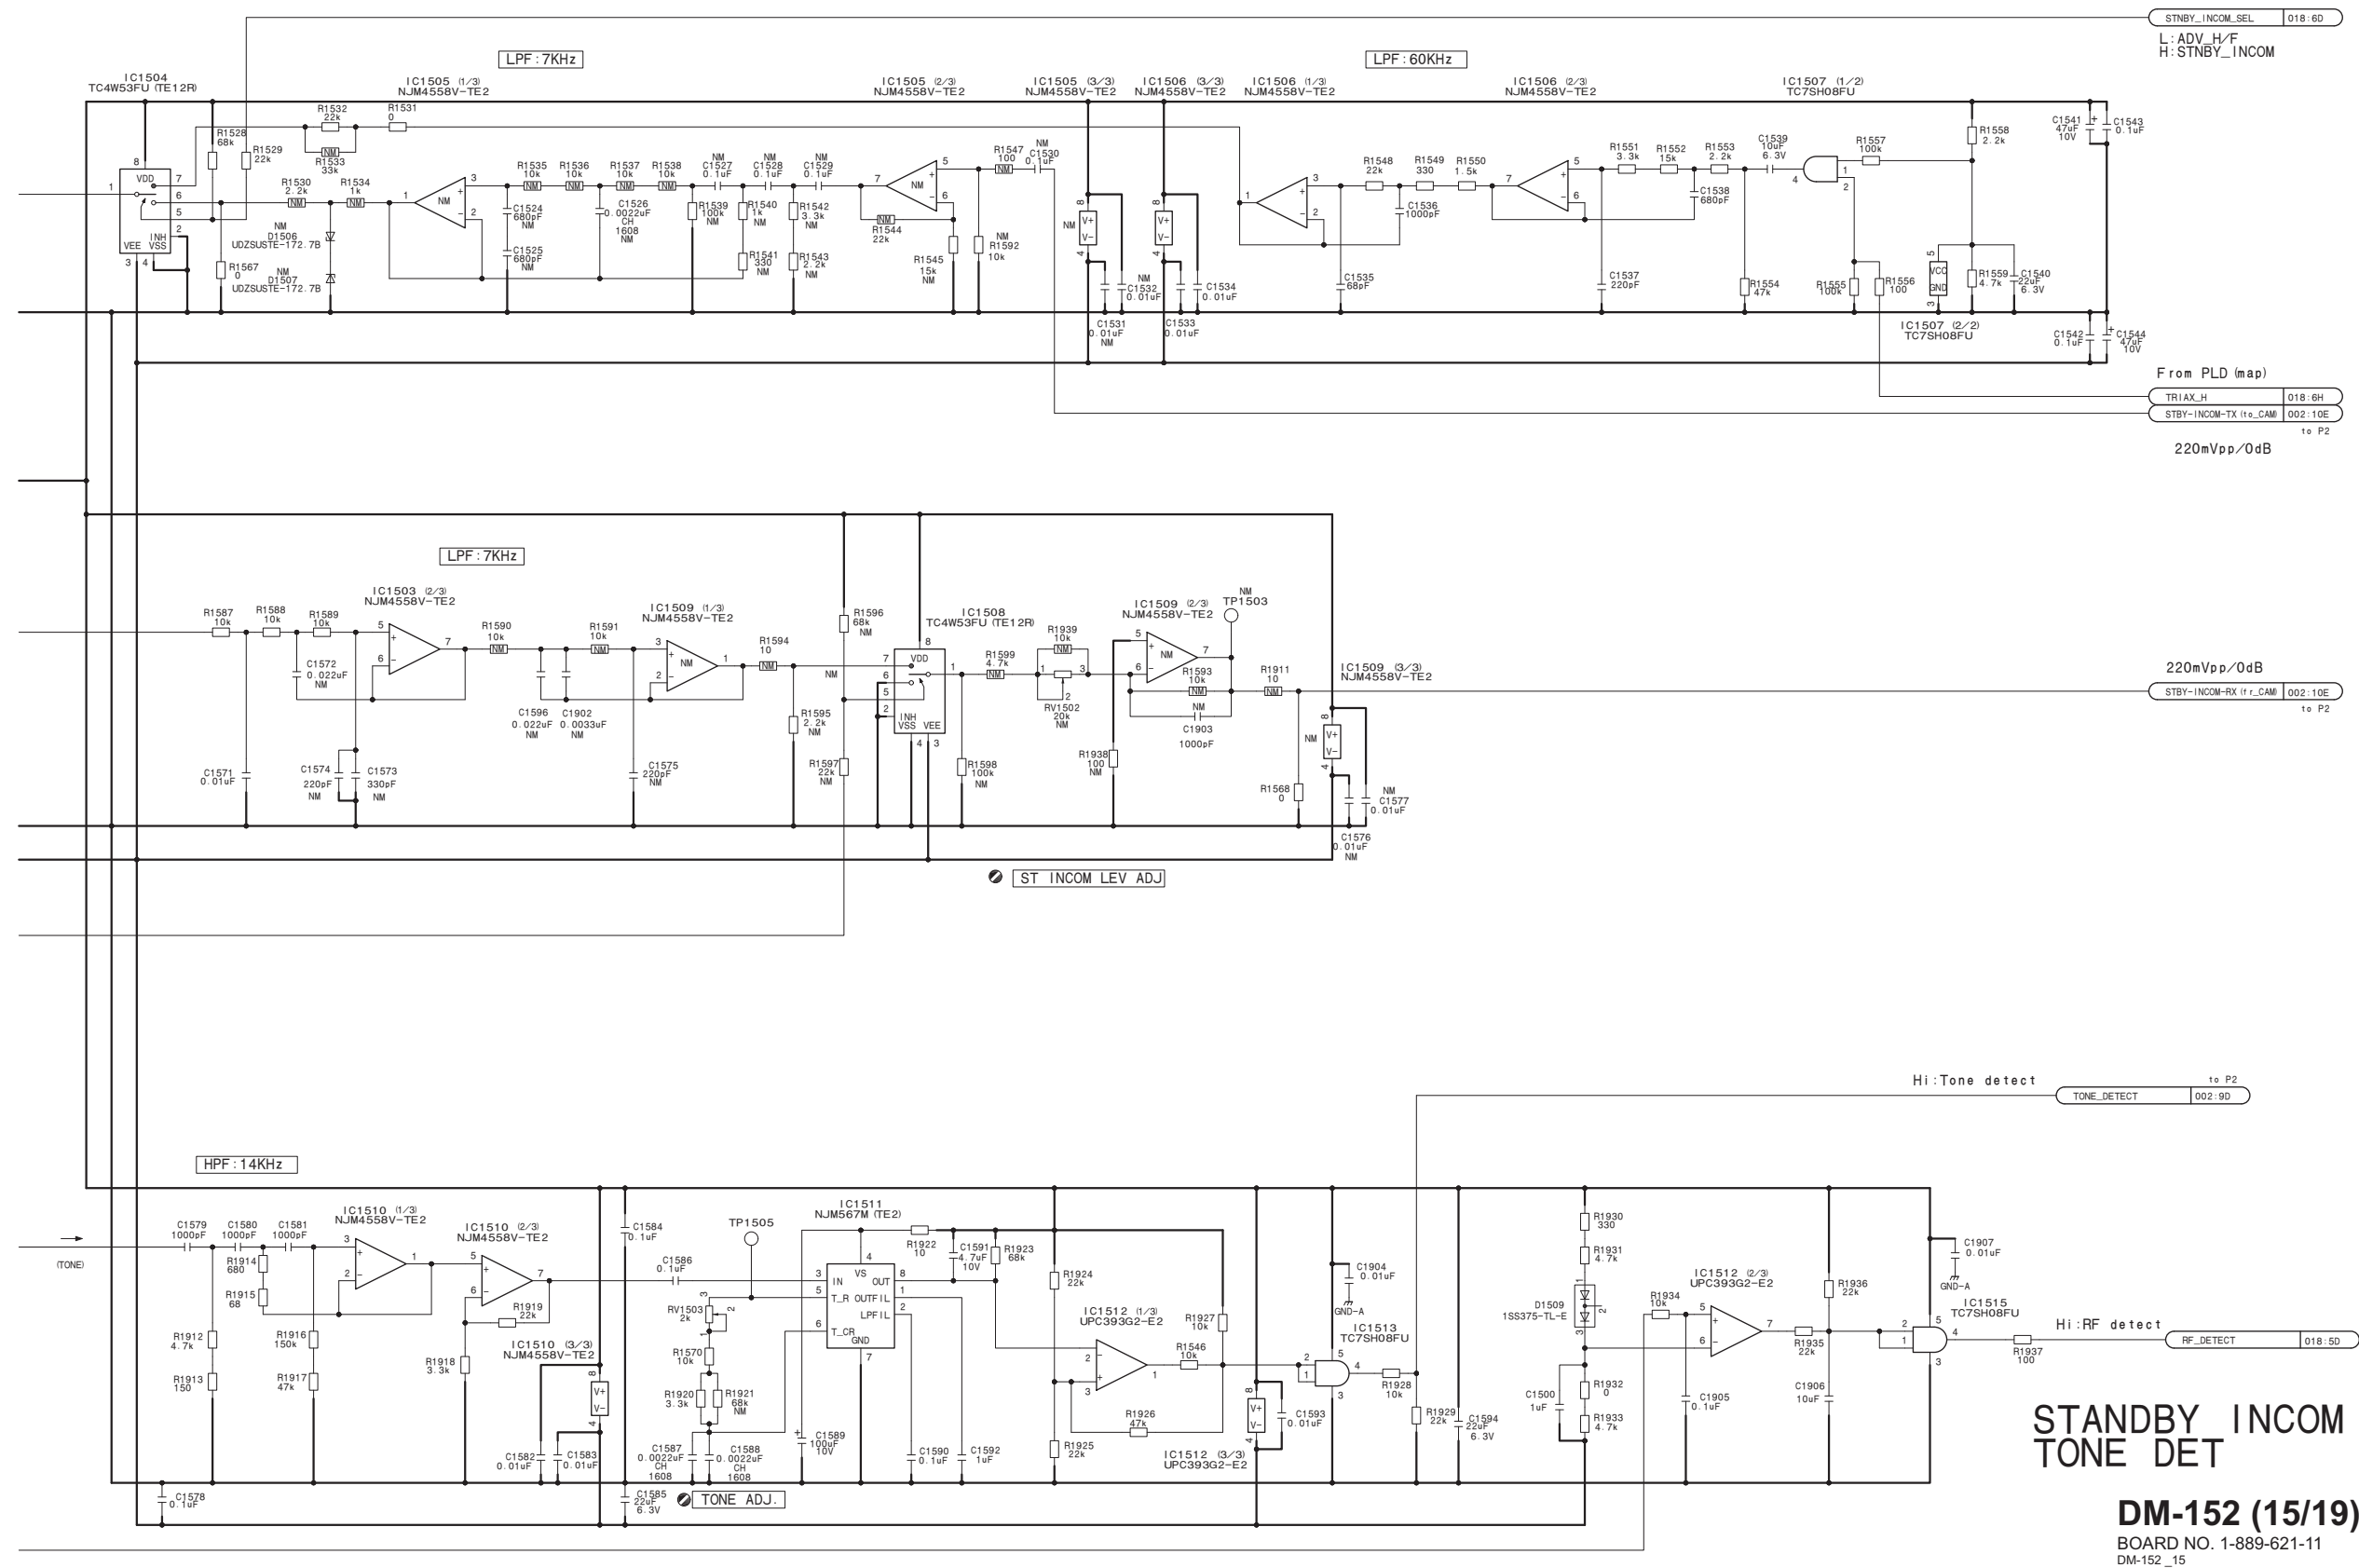

DM-152 (16/19)_L

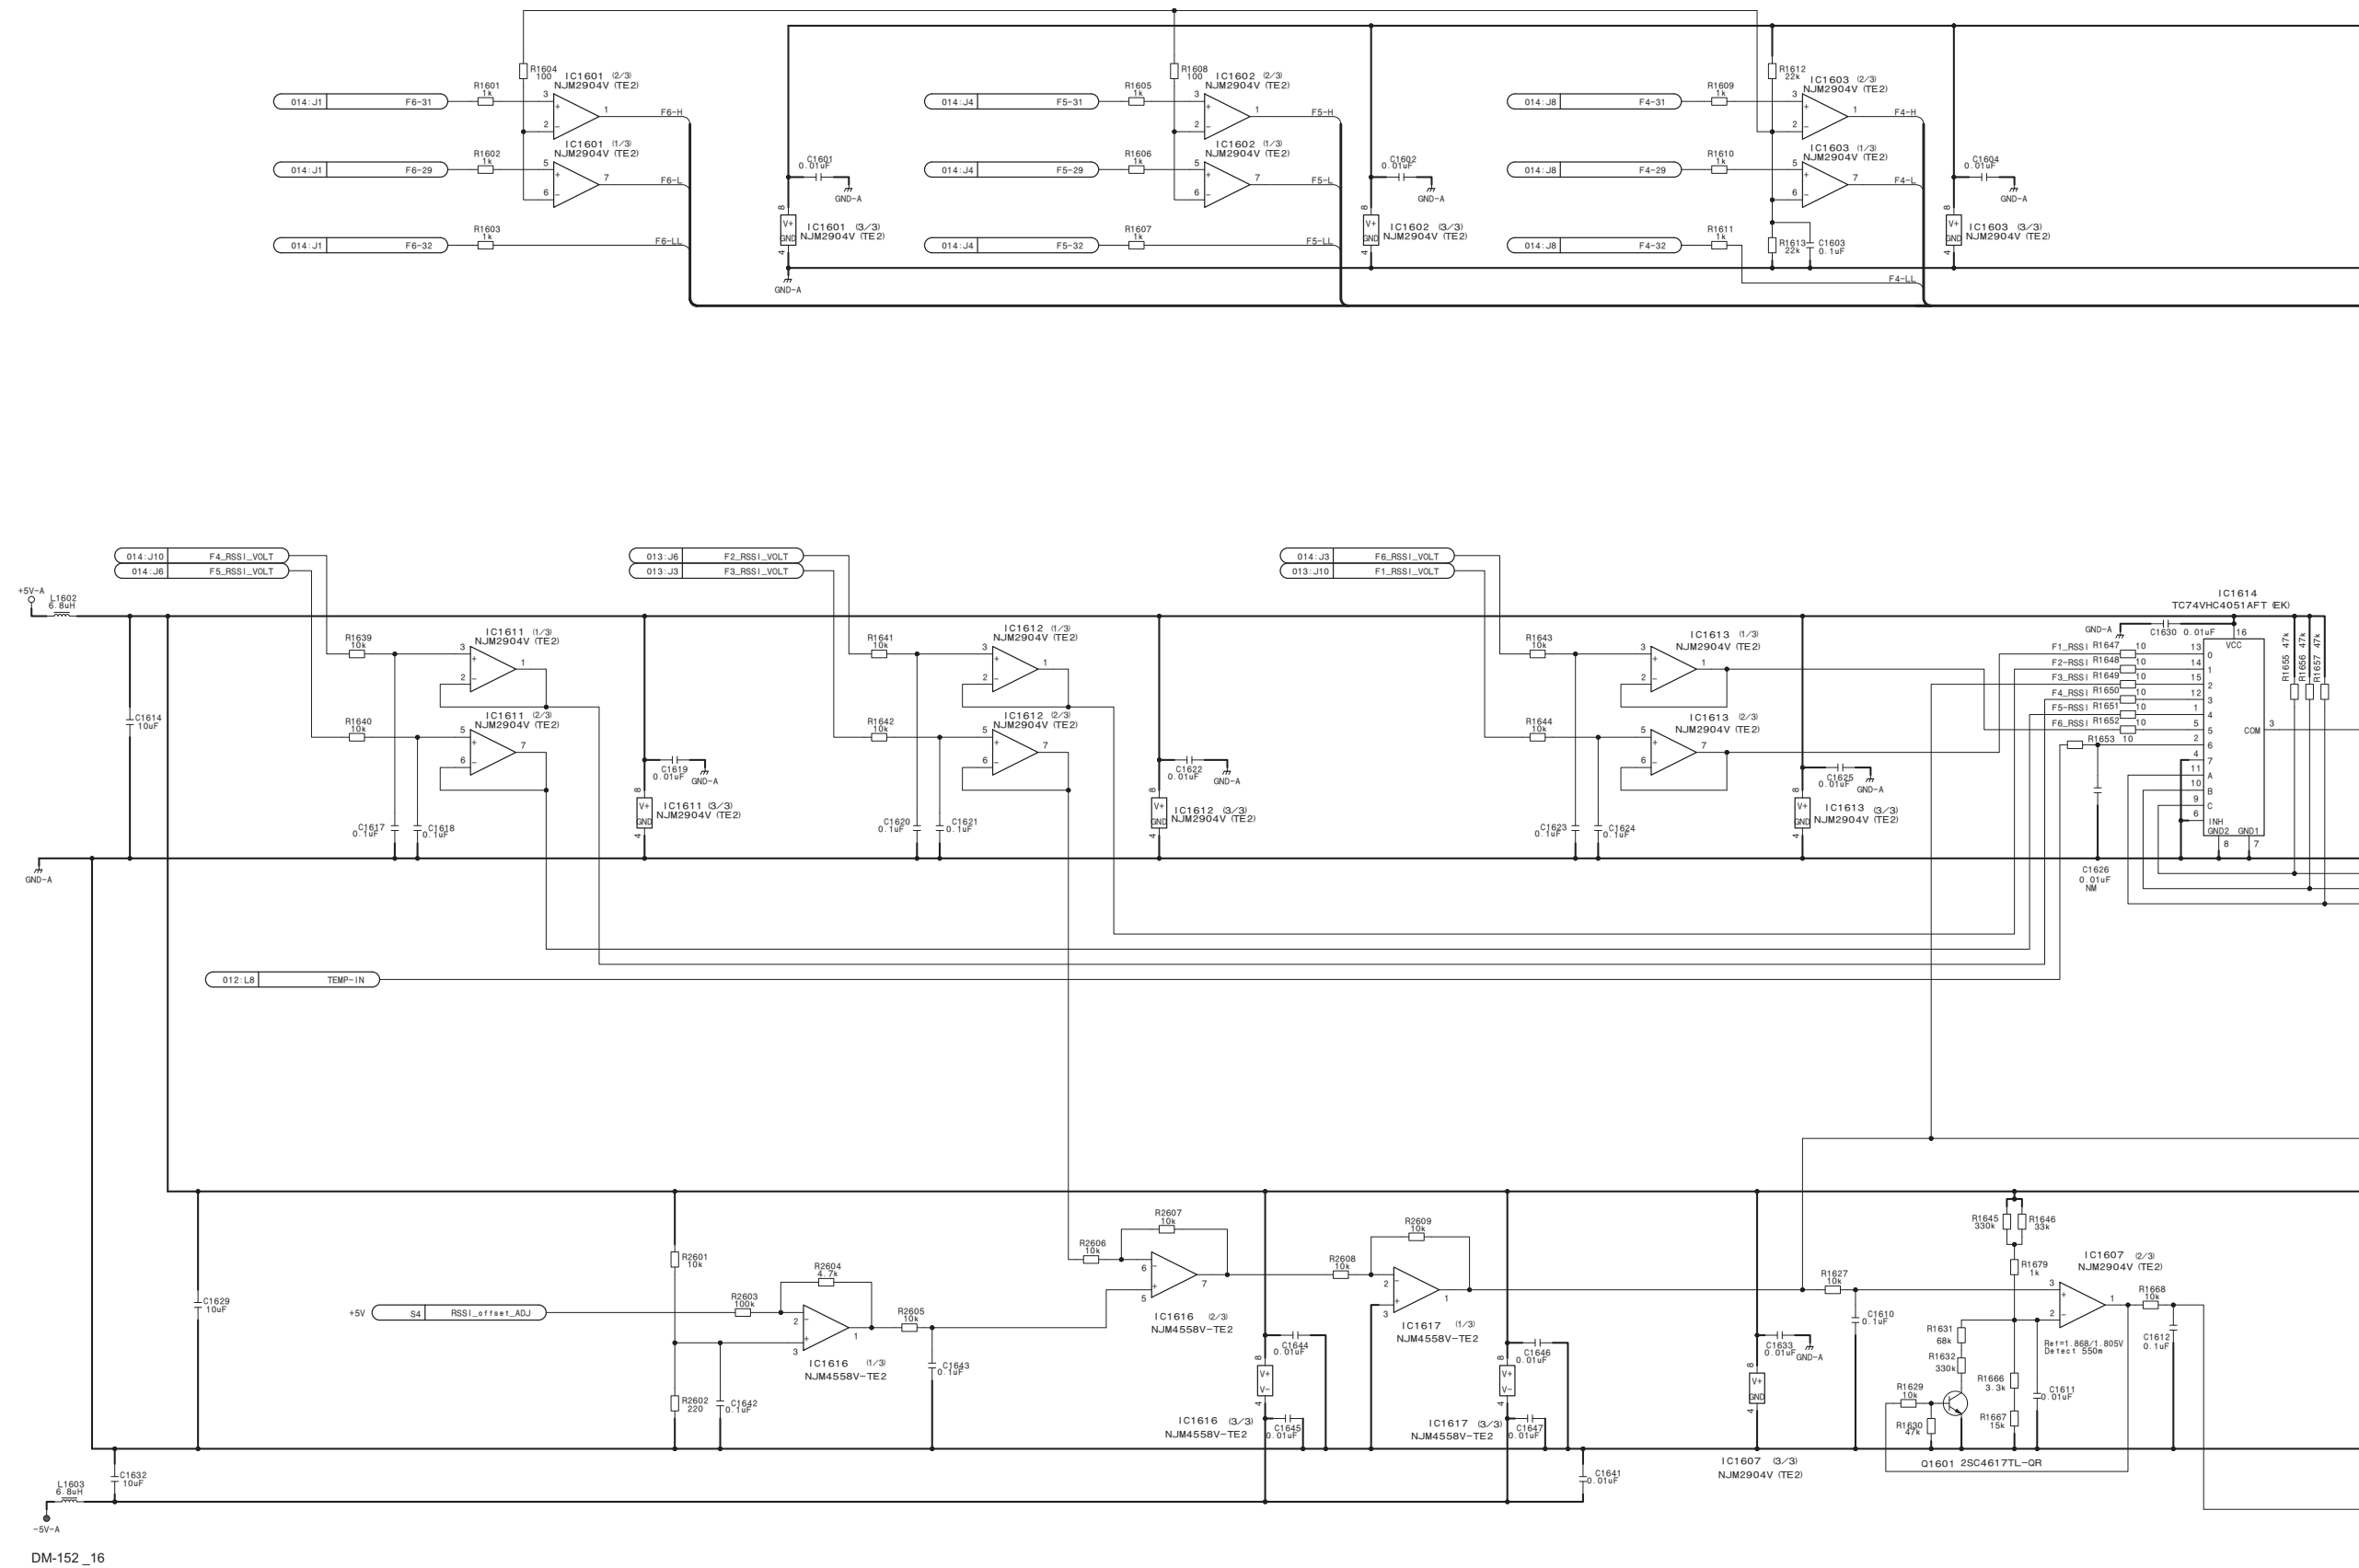




DM-152 (16/19)_R

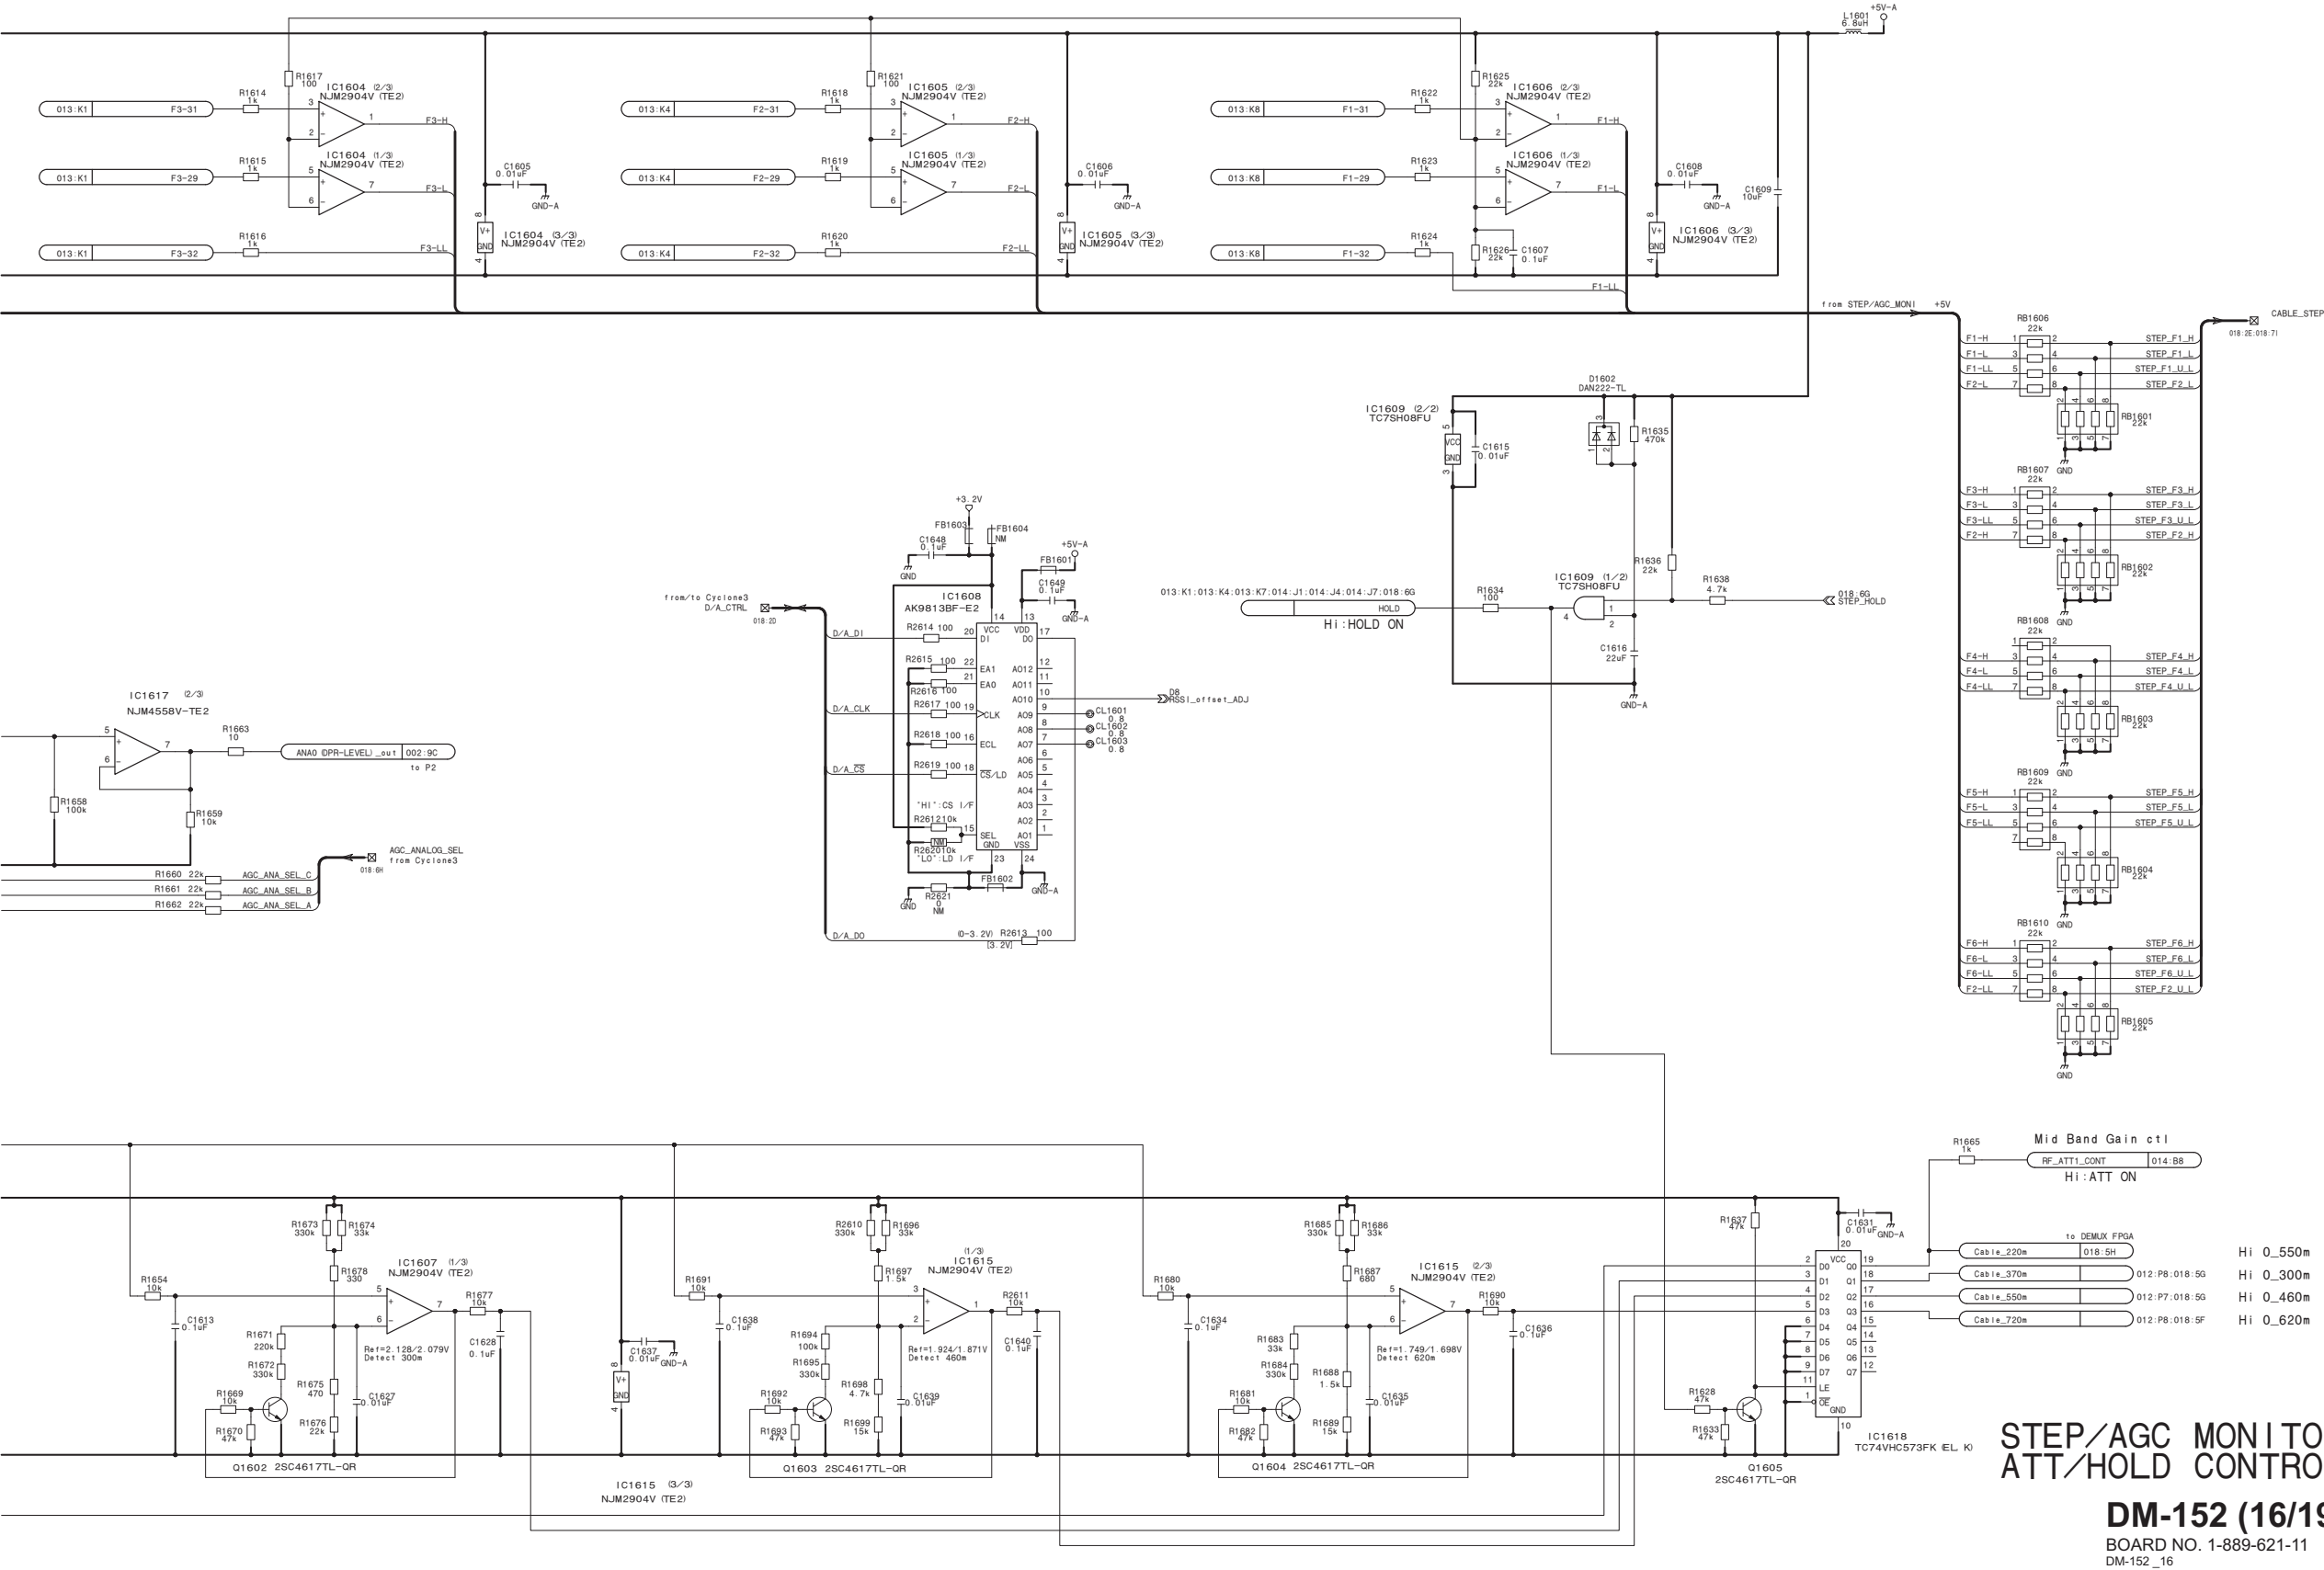

STEP/AGC MONITOR
ATT/HOLD CONTROL

DM-152 (16/19)
BOARD NO. 1-889-621-11
DM-152_16

DM-152 (17/19)

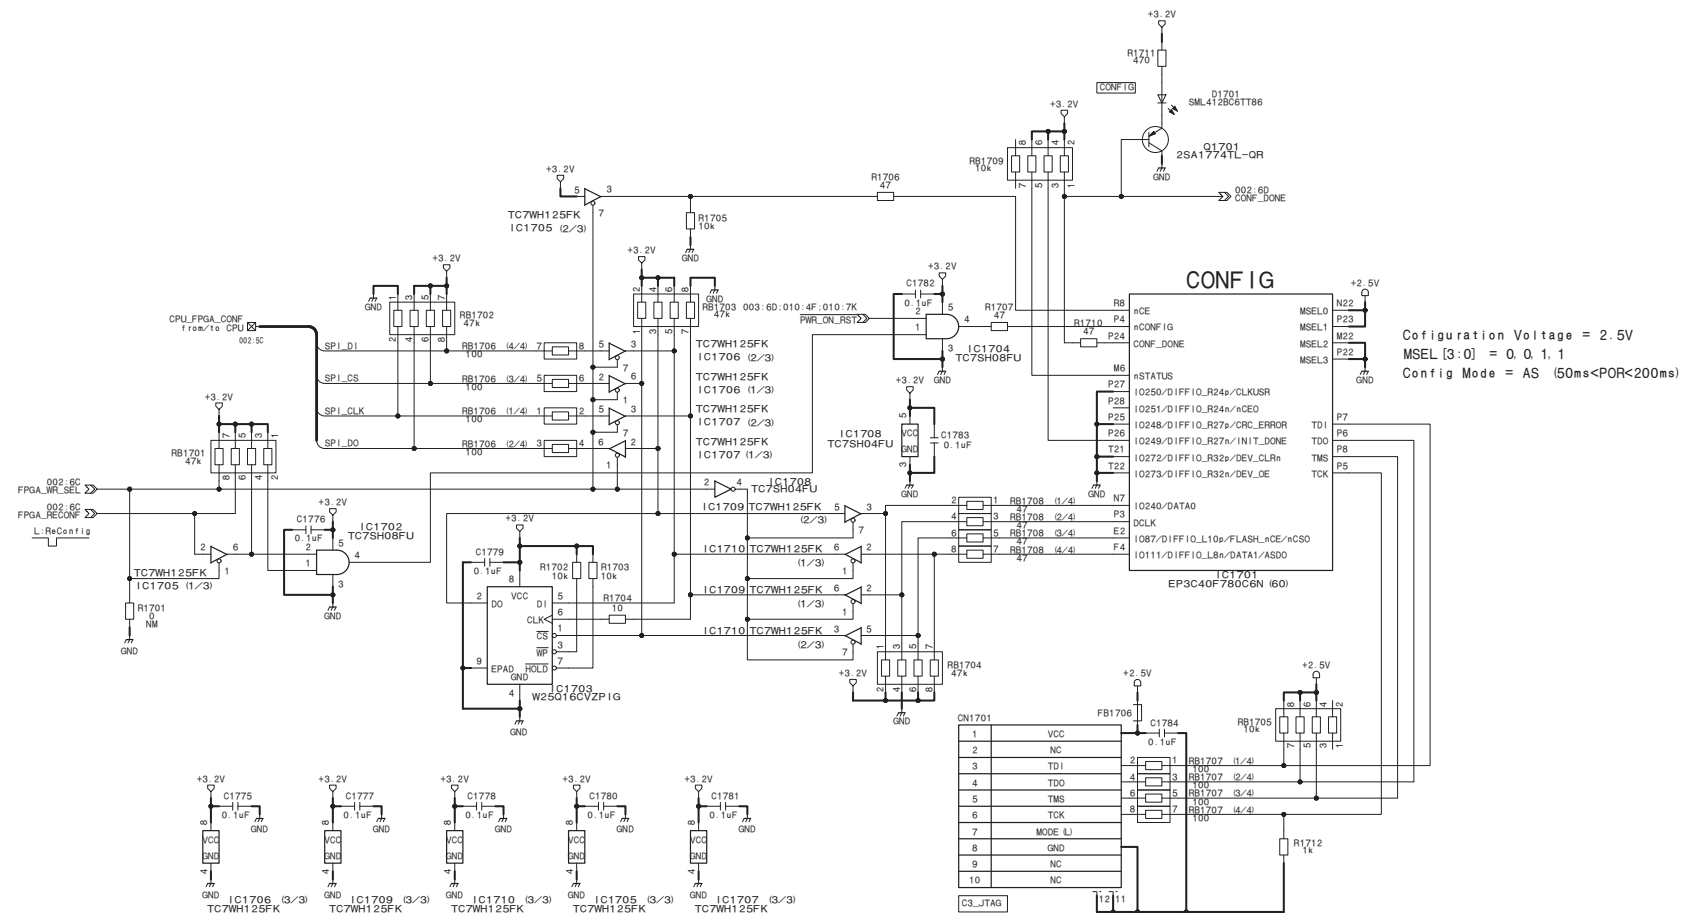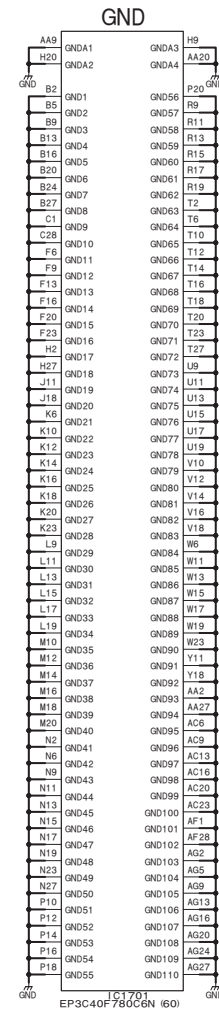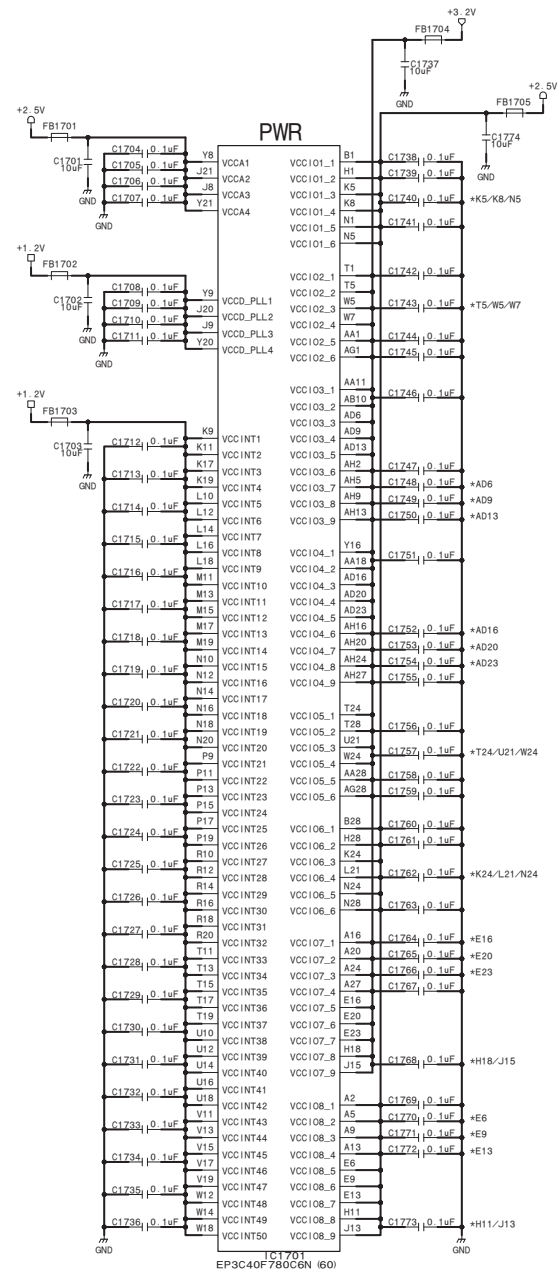


Cyclone3 (CONFIG/PWR/GND) 1/3


DM-152 (17/19)

BOARD NO. 1-889-621-11
DM-152_17





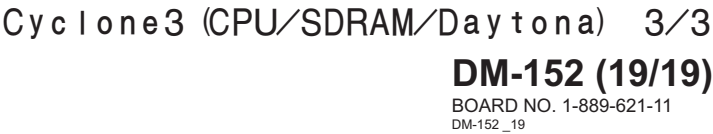


DPR-361
DPR-361 (1/25)

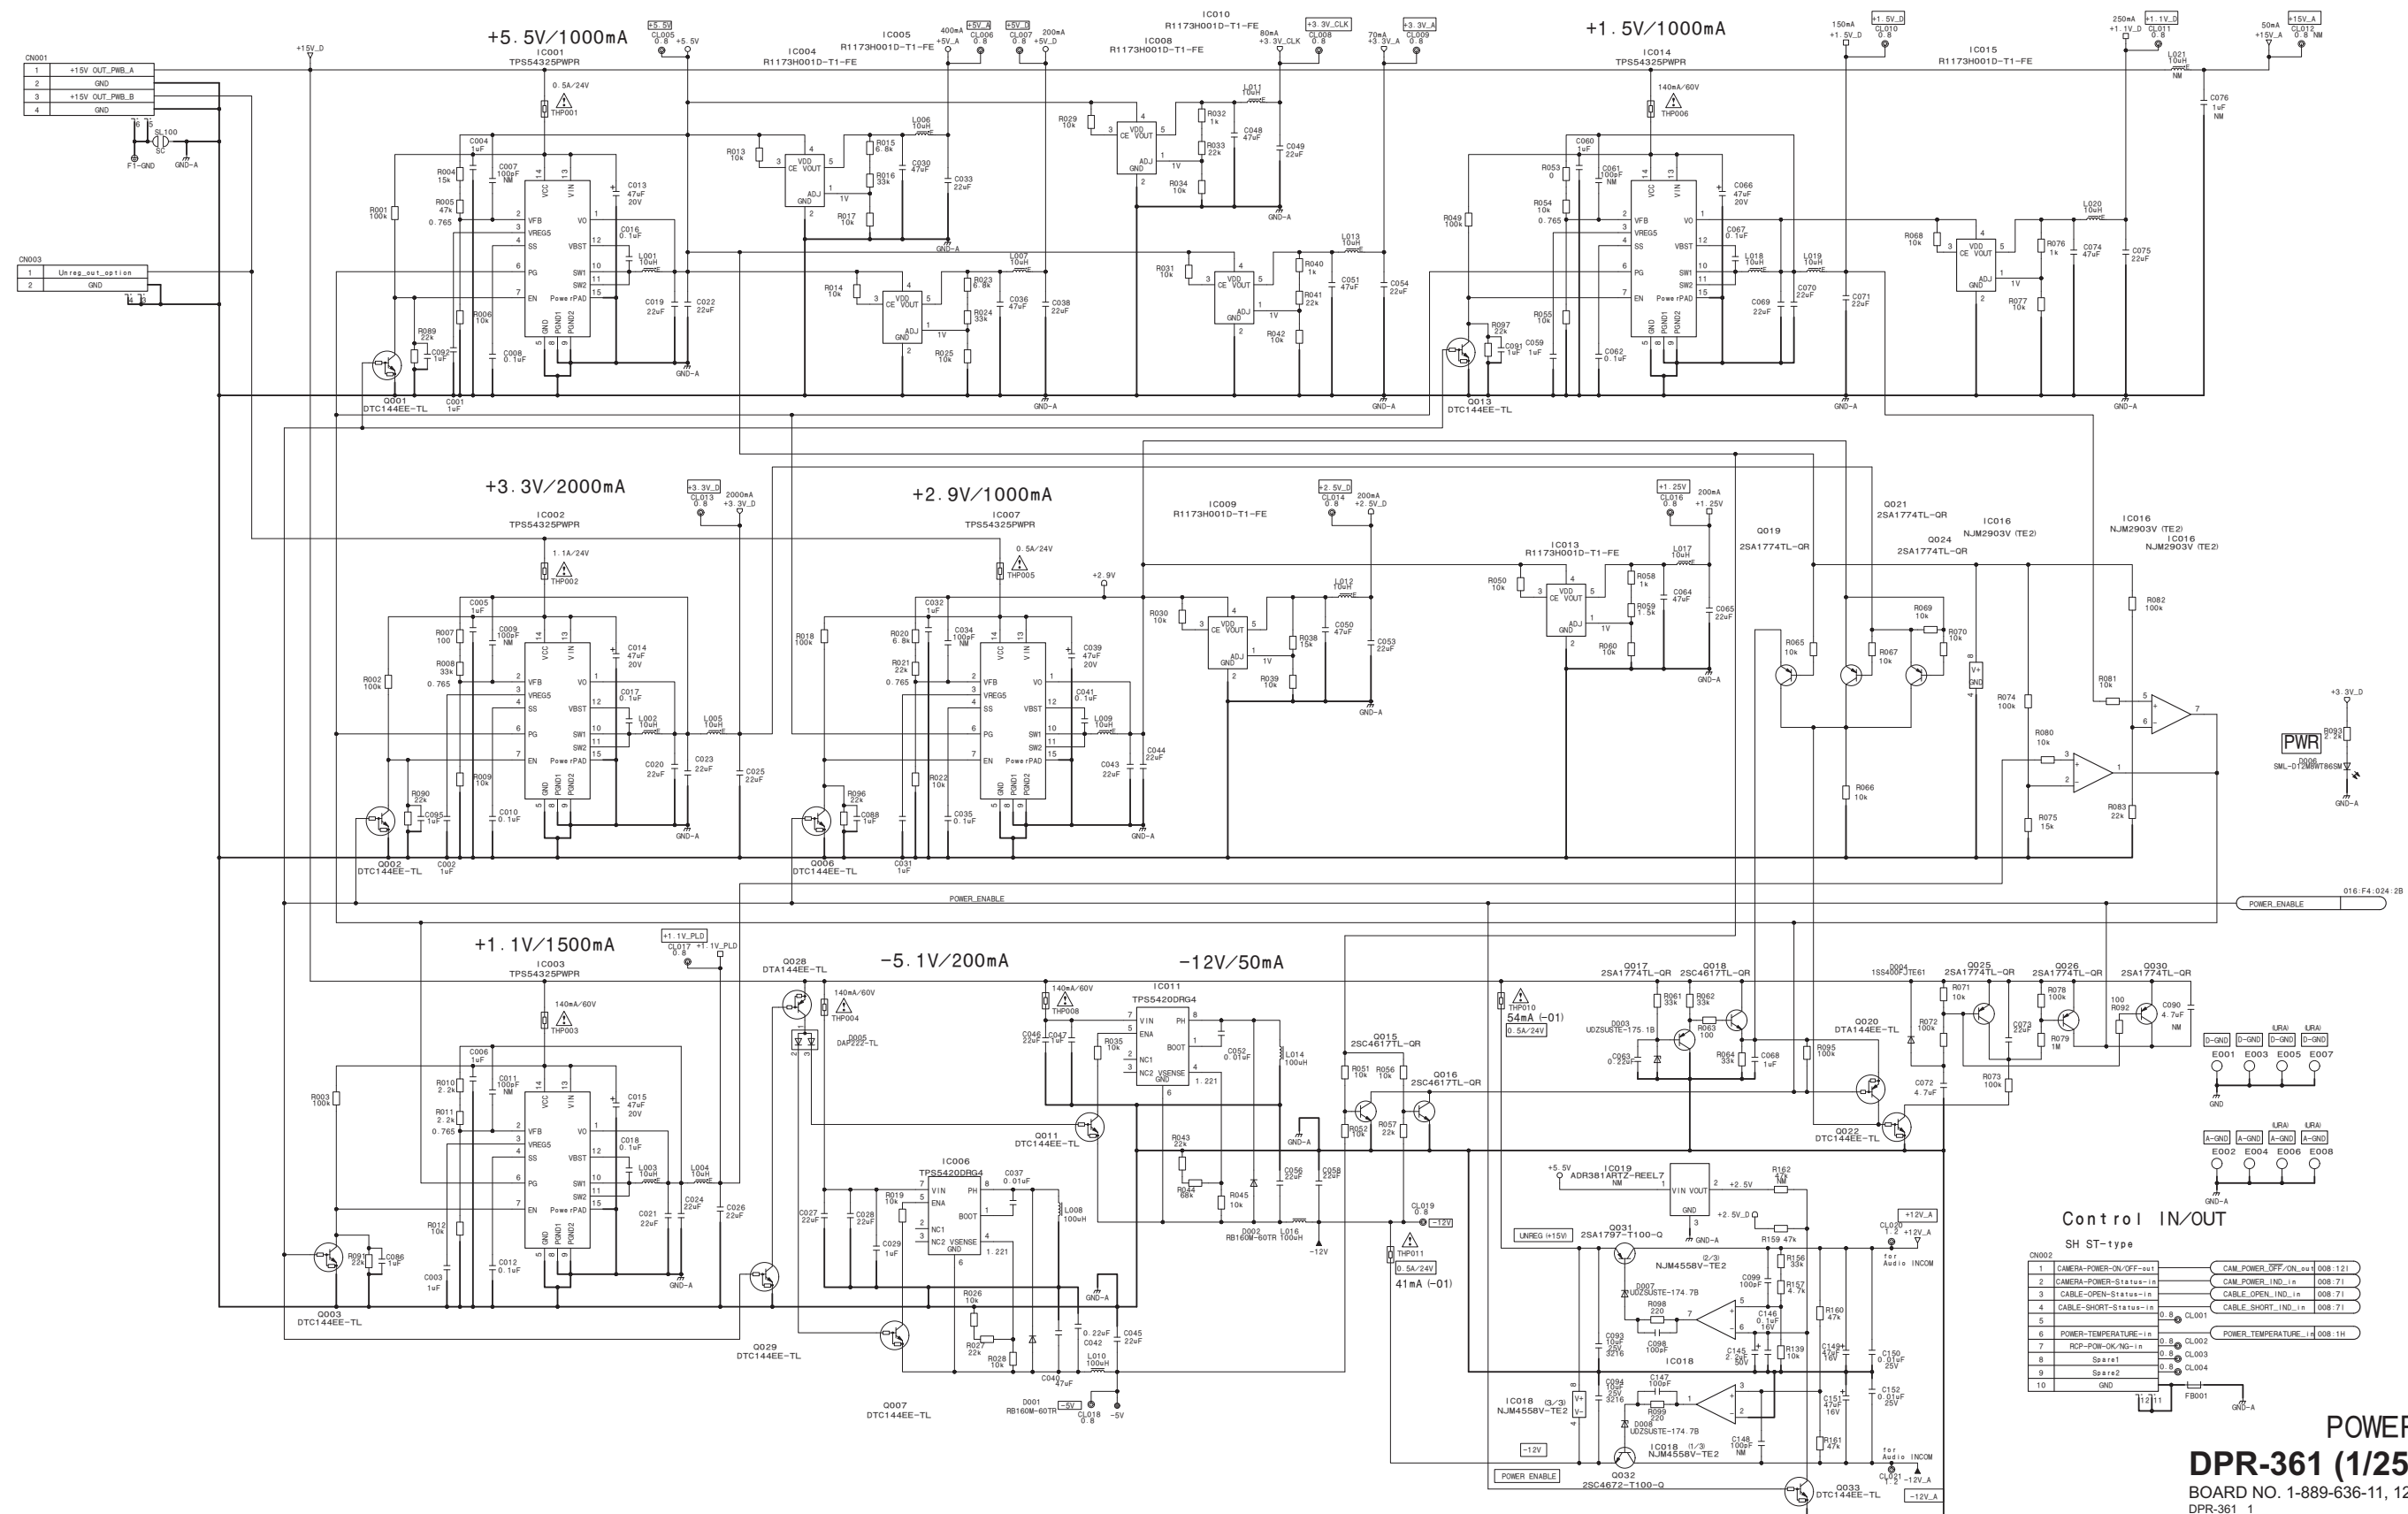


ICE

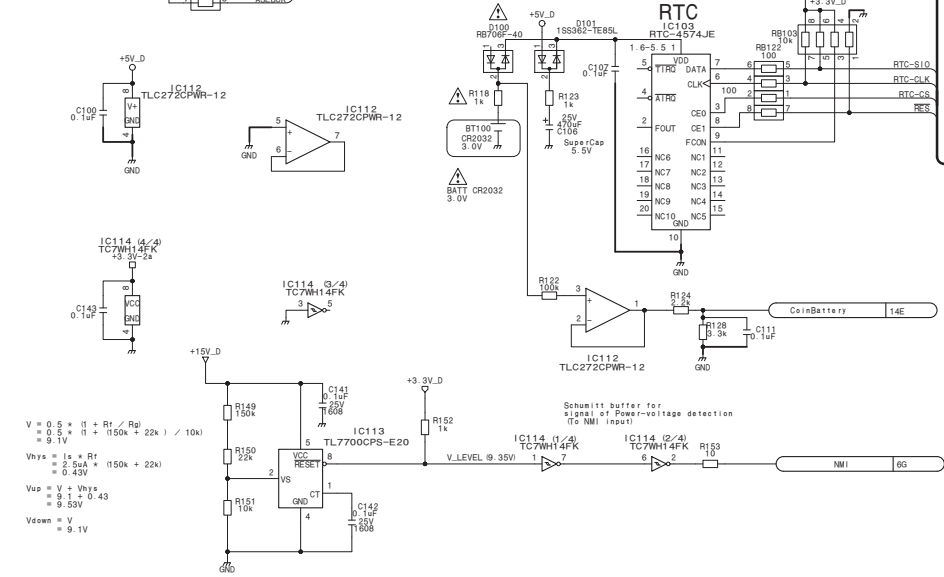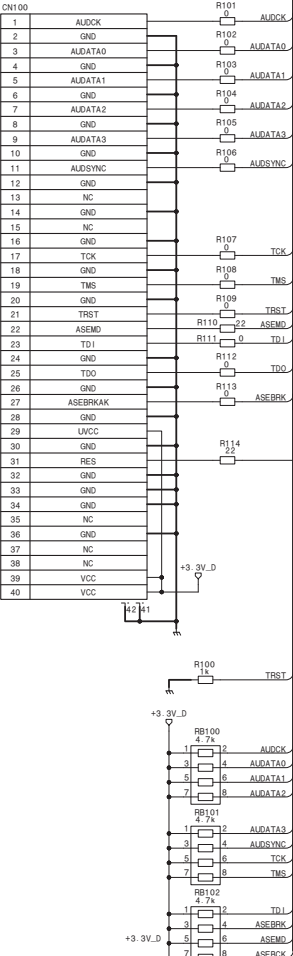


$$V = 0.5 \times \left(\frac{R_1 + R_2}{R_1} \right) \times 1.5V$$
$$V_{th} = \frac{V}{R_1 + R_2} \times R_1$$
$$V_{th} = \frac{V}{R_1 + R_2} \times R_1$$
$$V_{th} = \frac{V}{R_1 + R_2} \times R_1$$
$$V_{th} = \frac{V}{R_1 + R_2} \times R_1$$
$$V_{th} = \frac{V}{R_1 + R_2} \times R_1$$

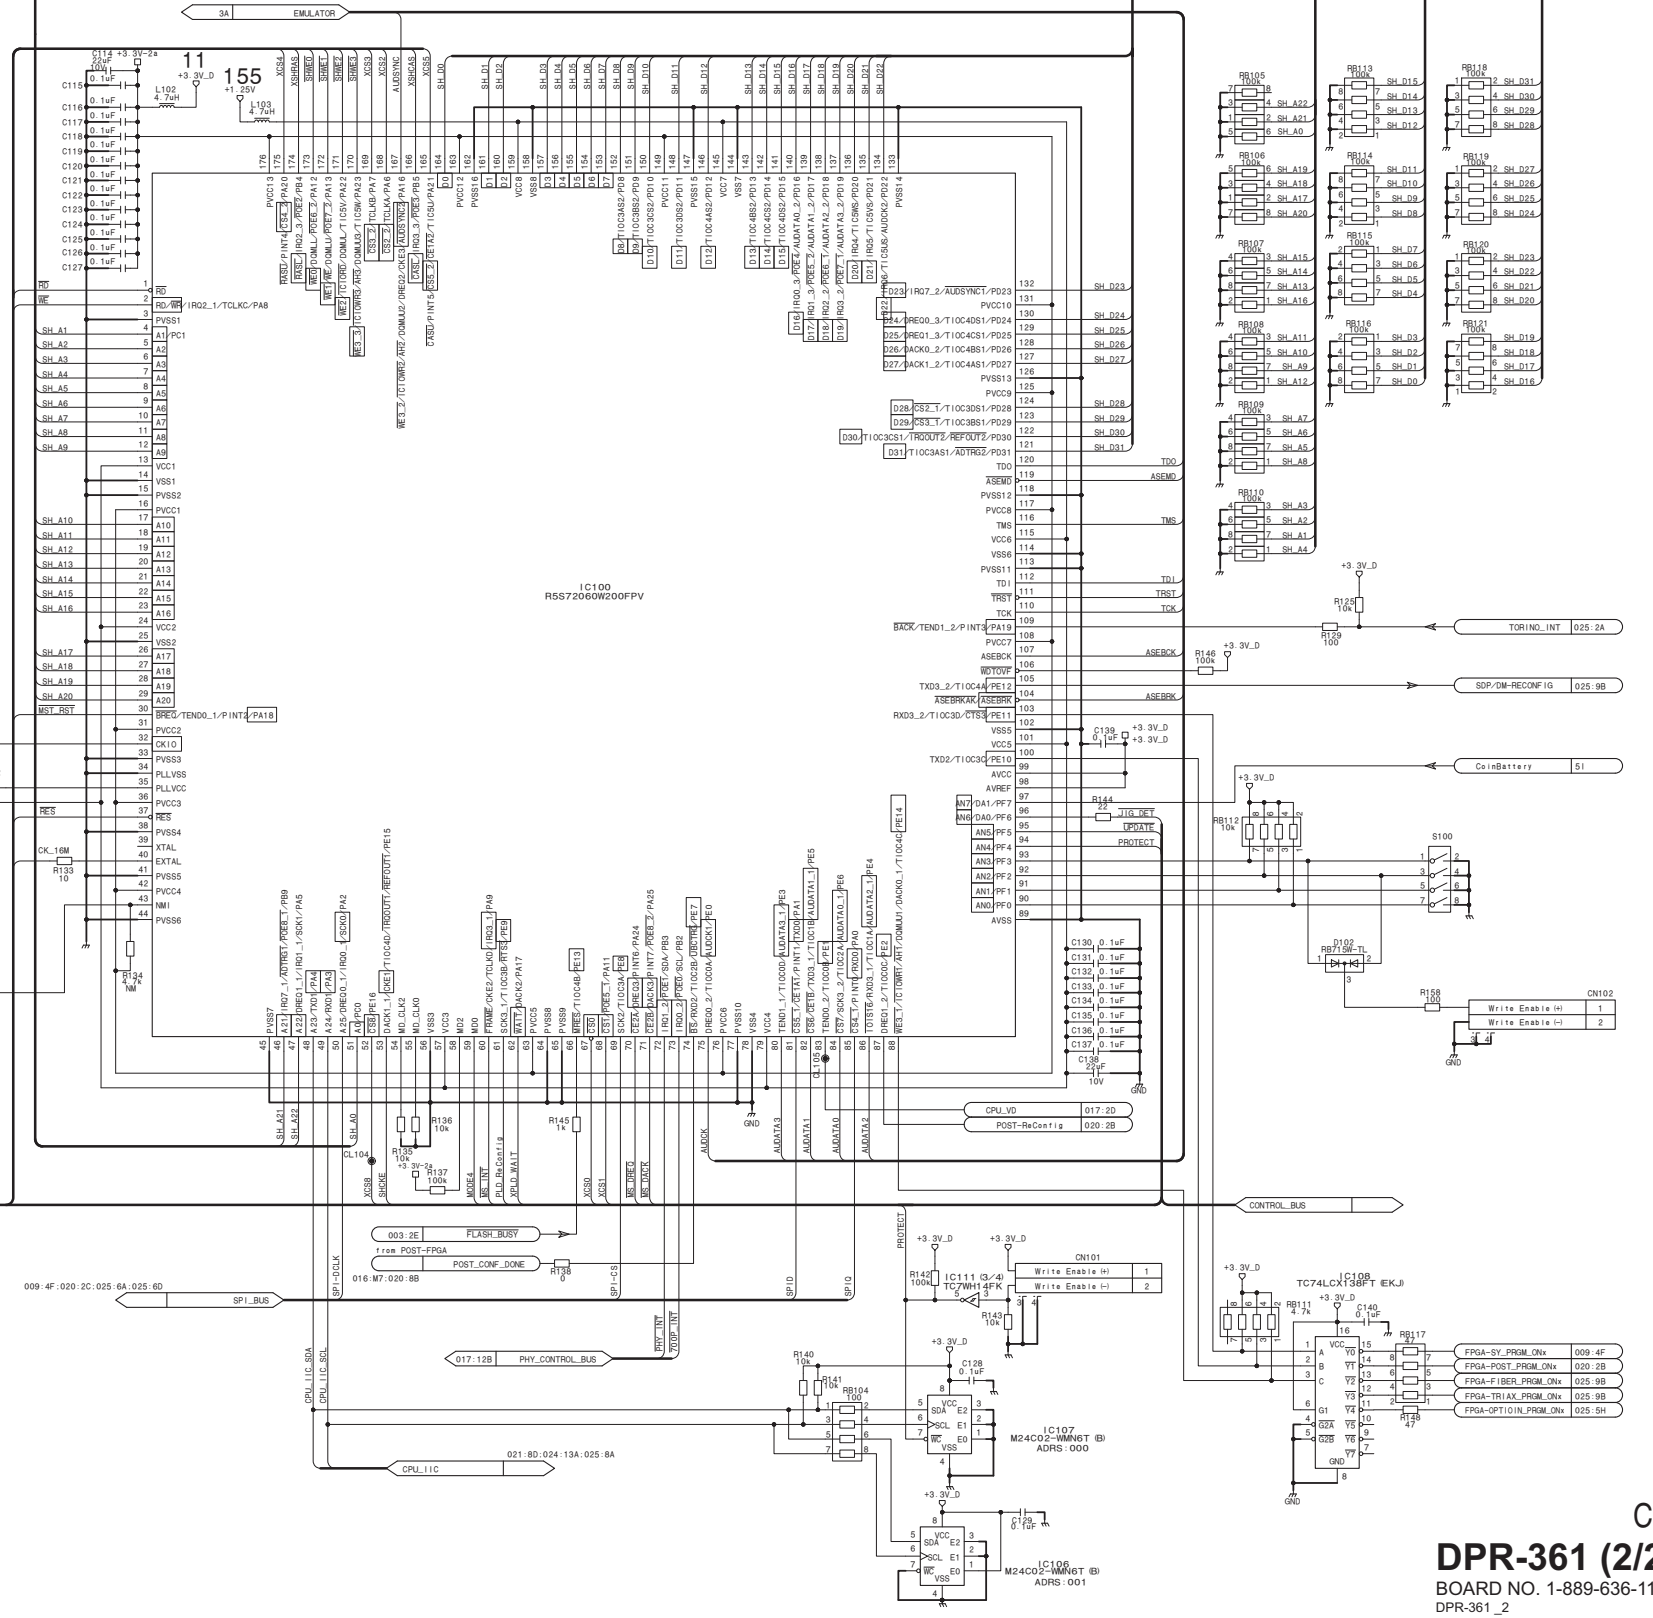


CPU
DPR-361 (2/25)
BOARD NO. 1-889-636-11, 12
DPR-361_2

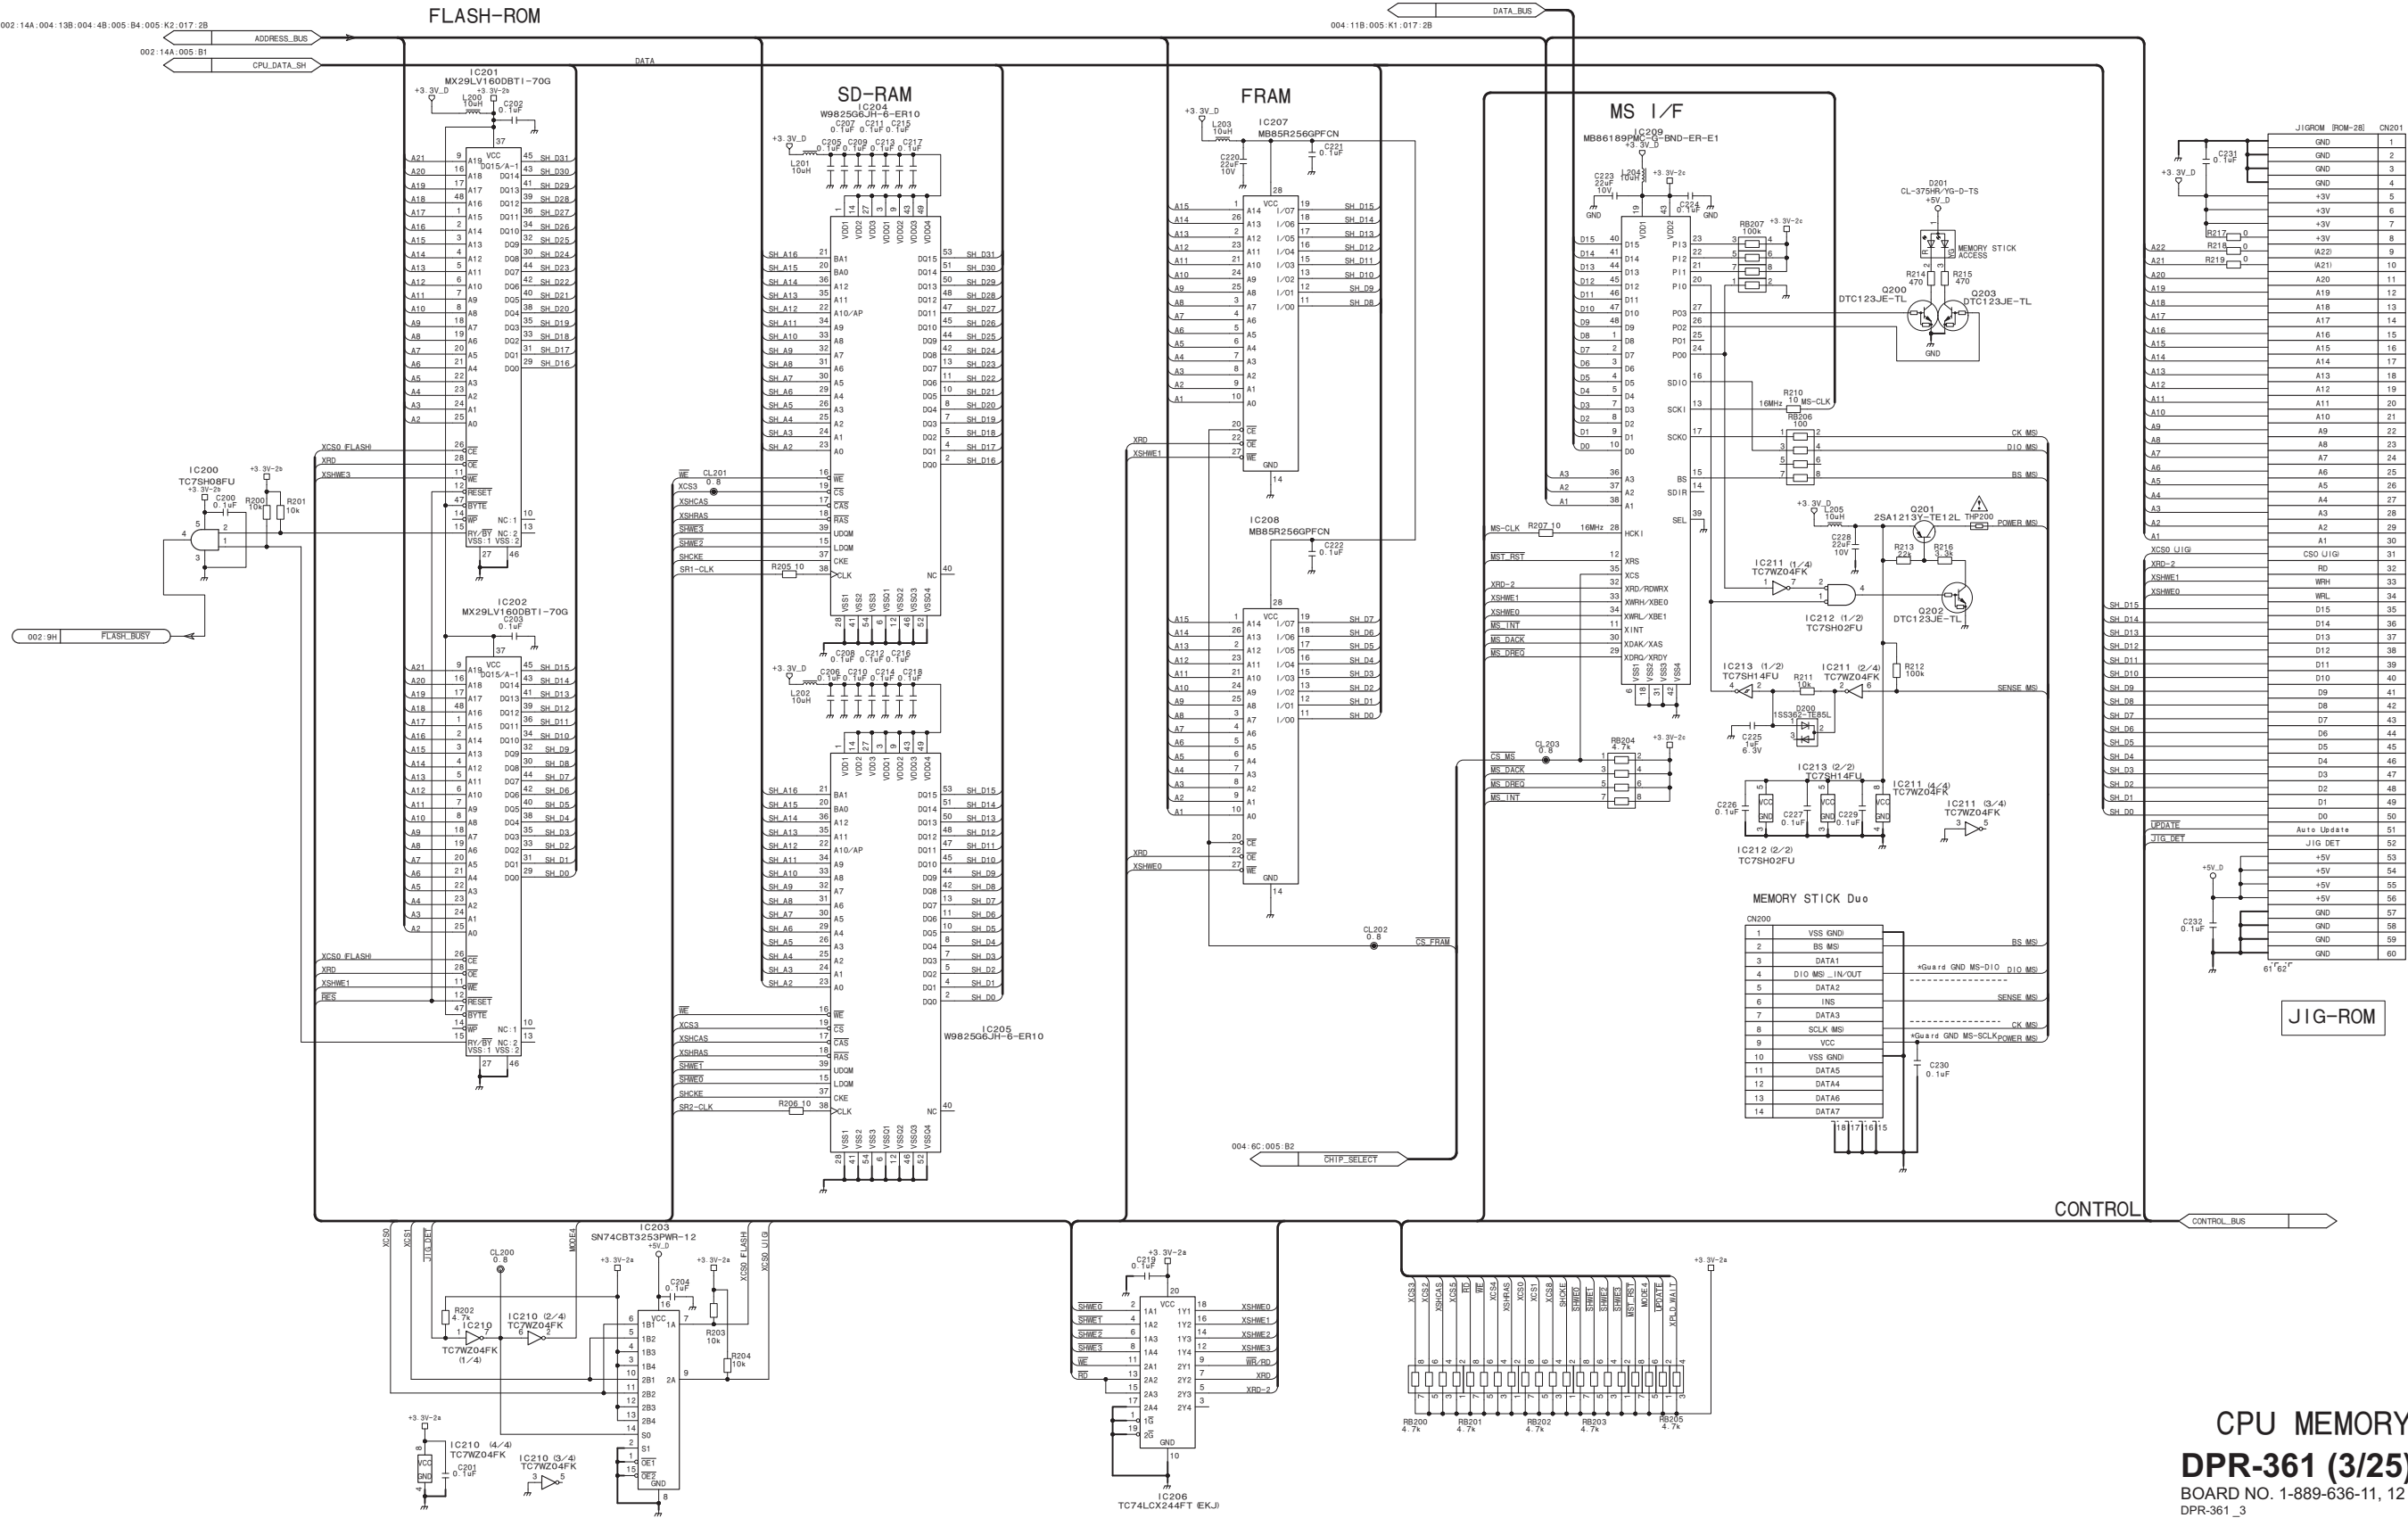

CPU MEMORY
DPR-361 (3/25)
BOARD NO. 1-889-636-11, 12
DPR-361_3

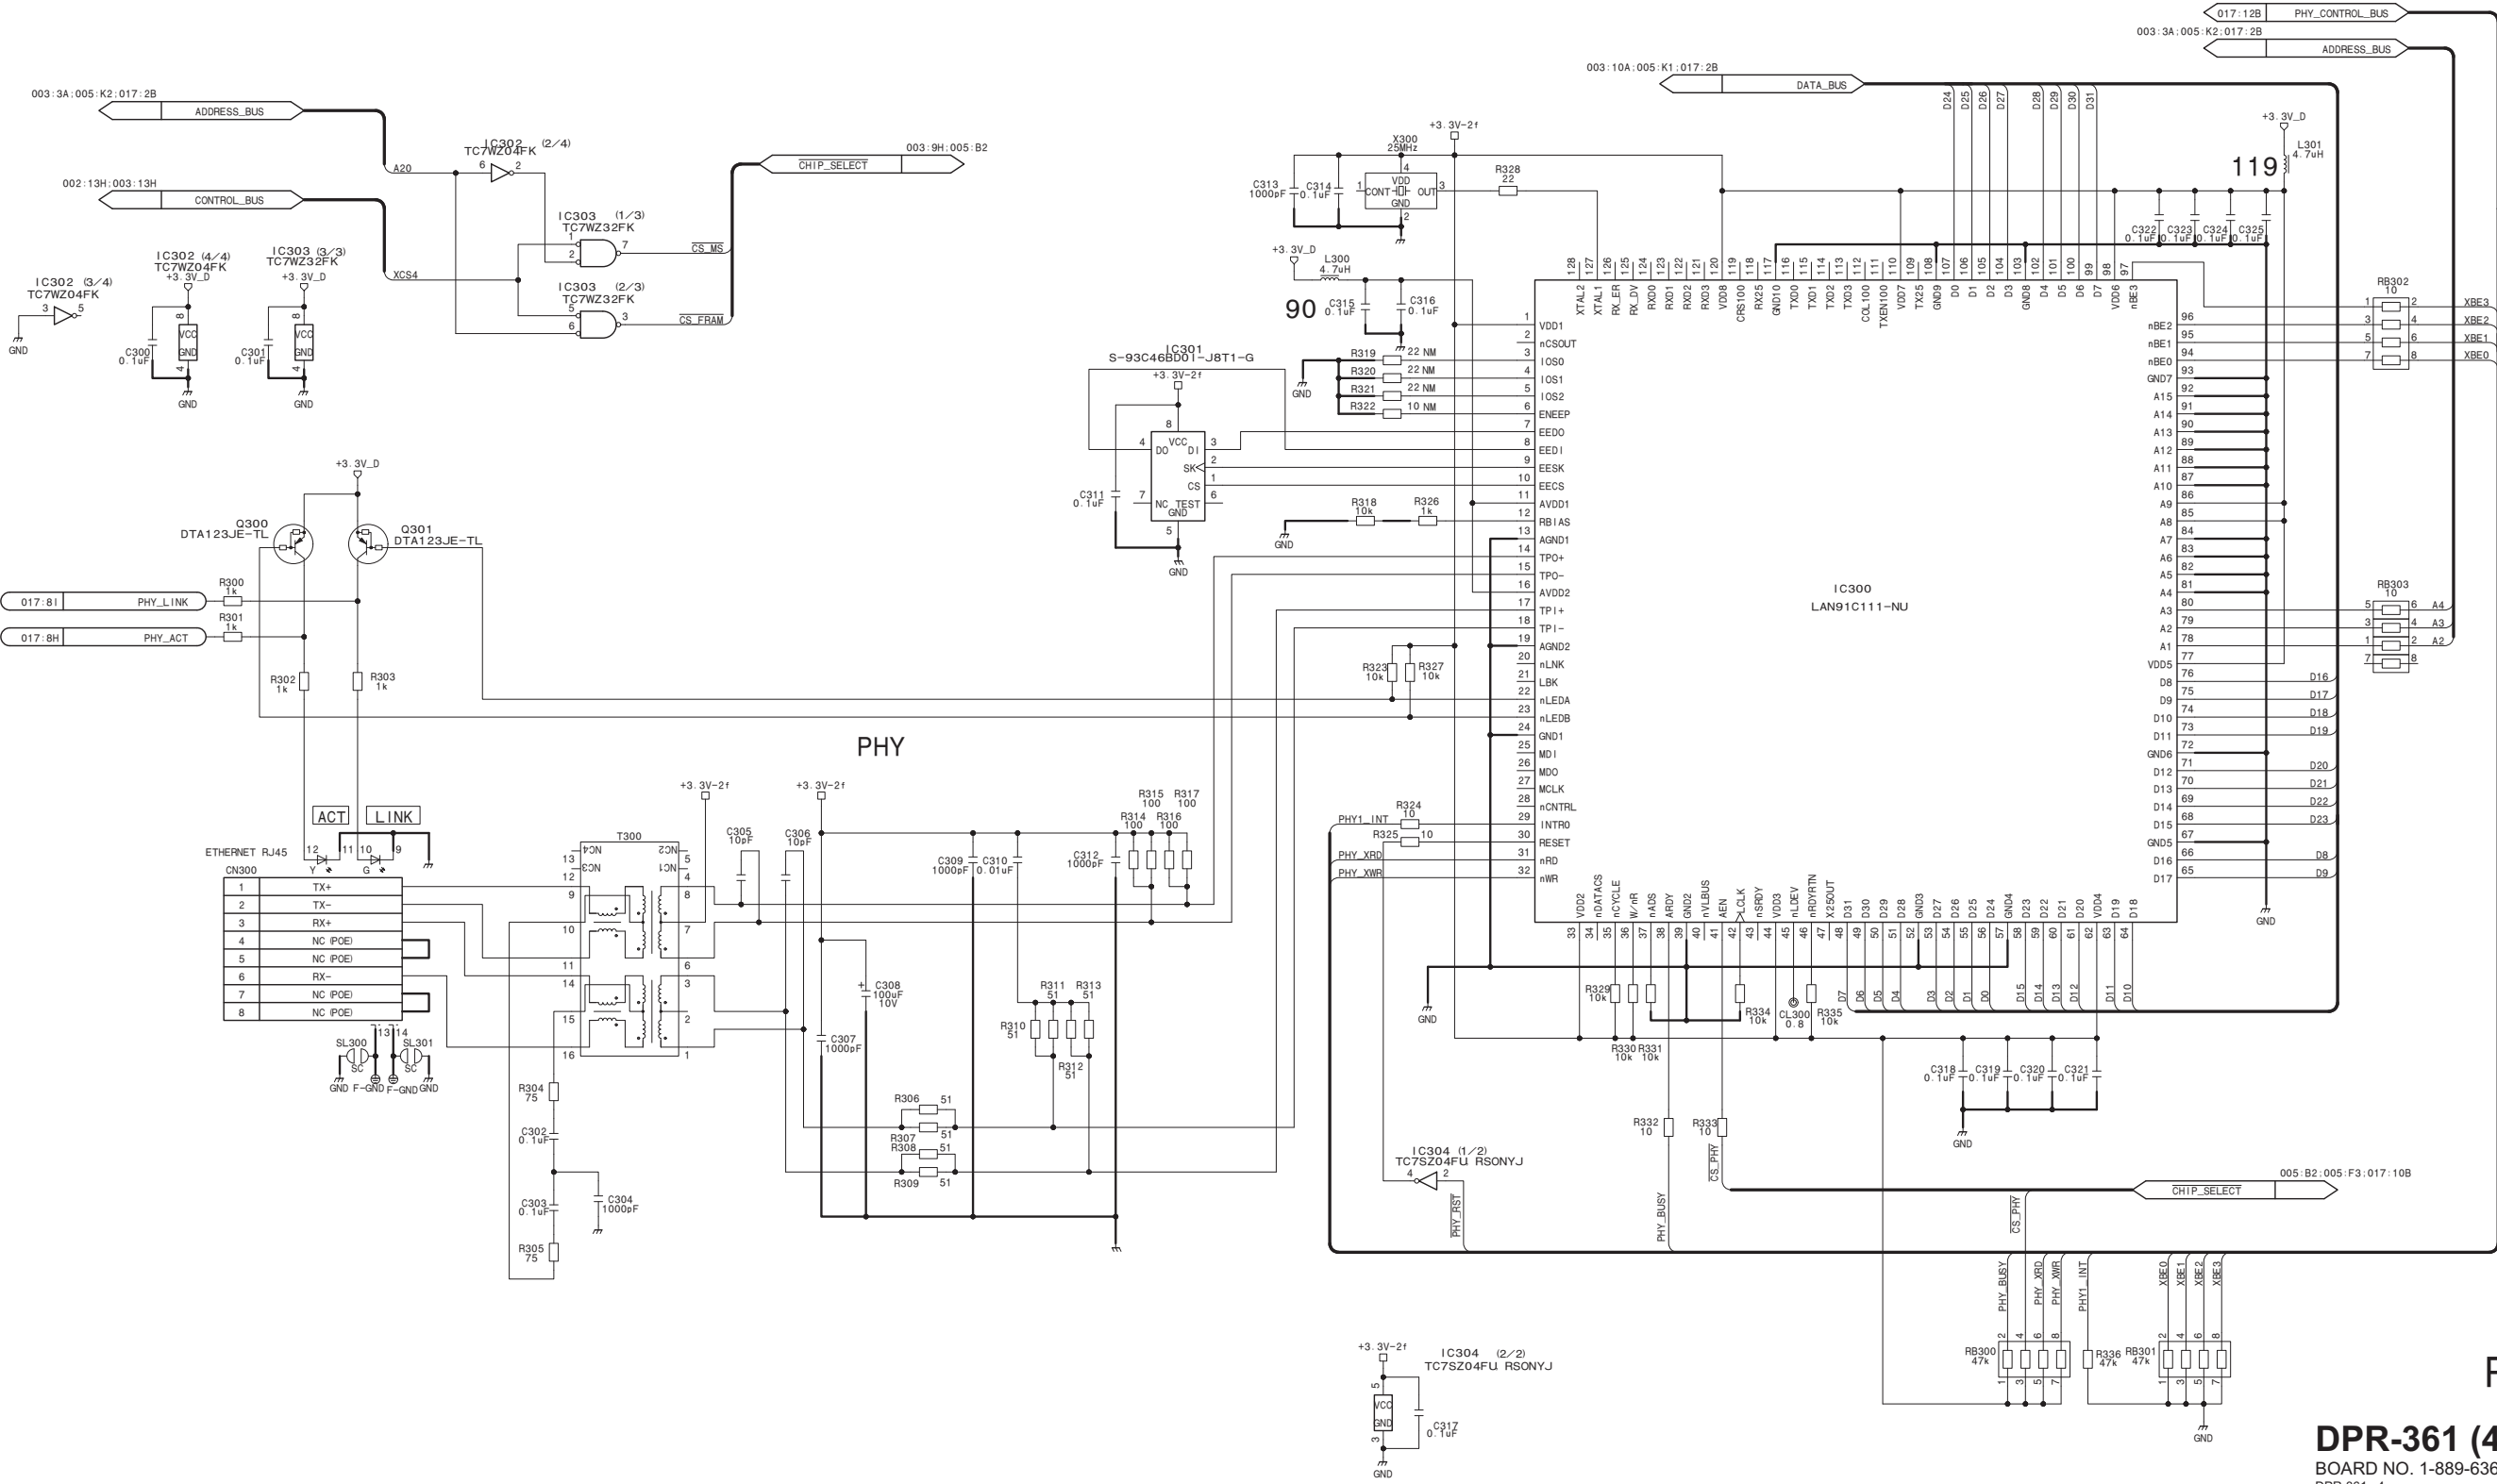


DPR-361 (5/25)

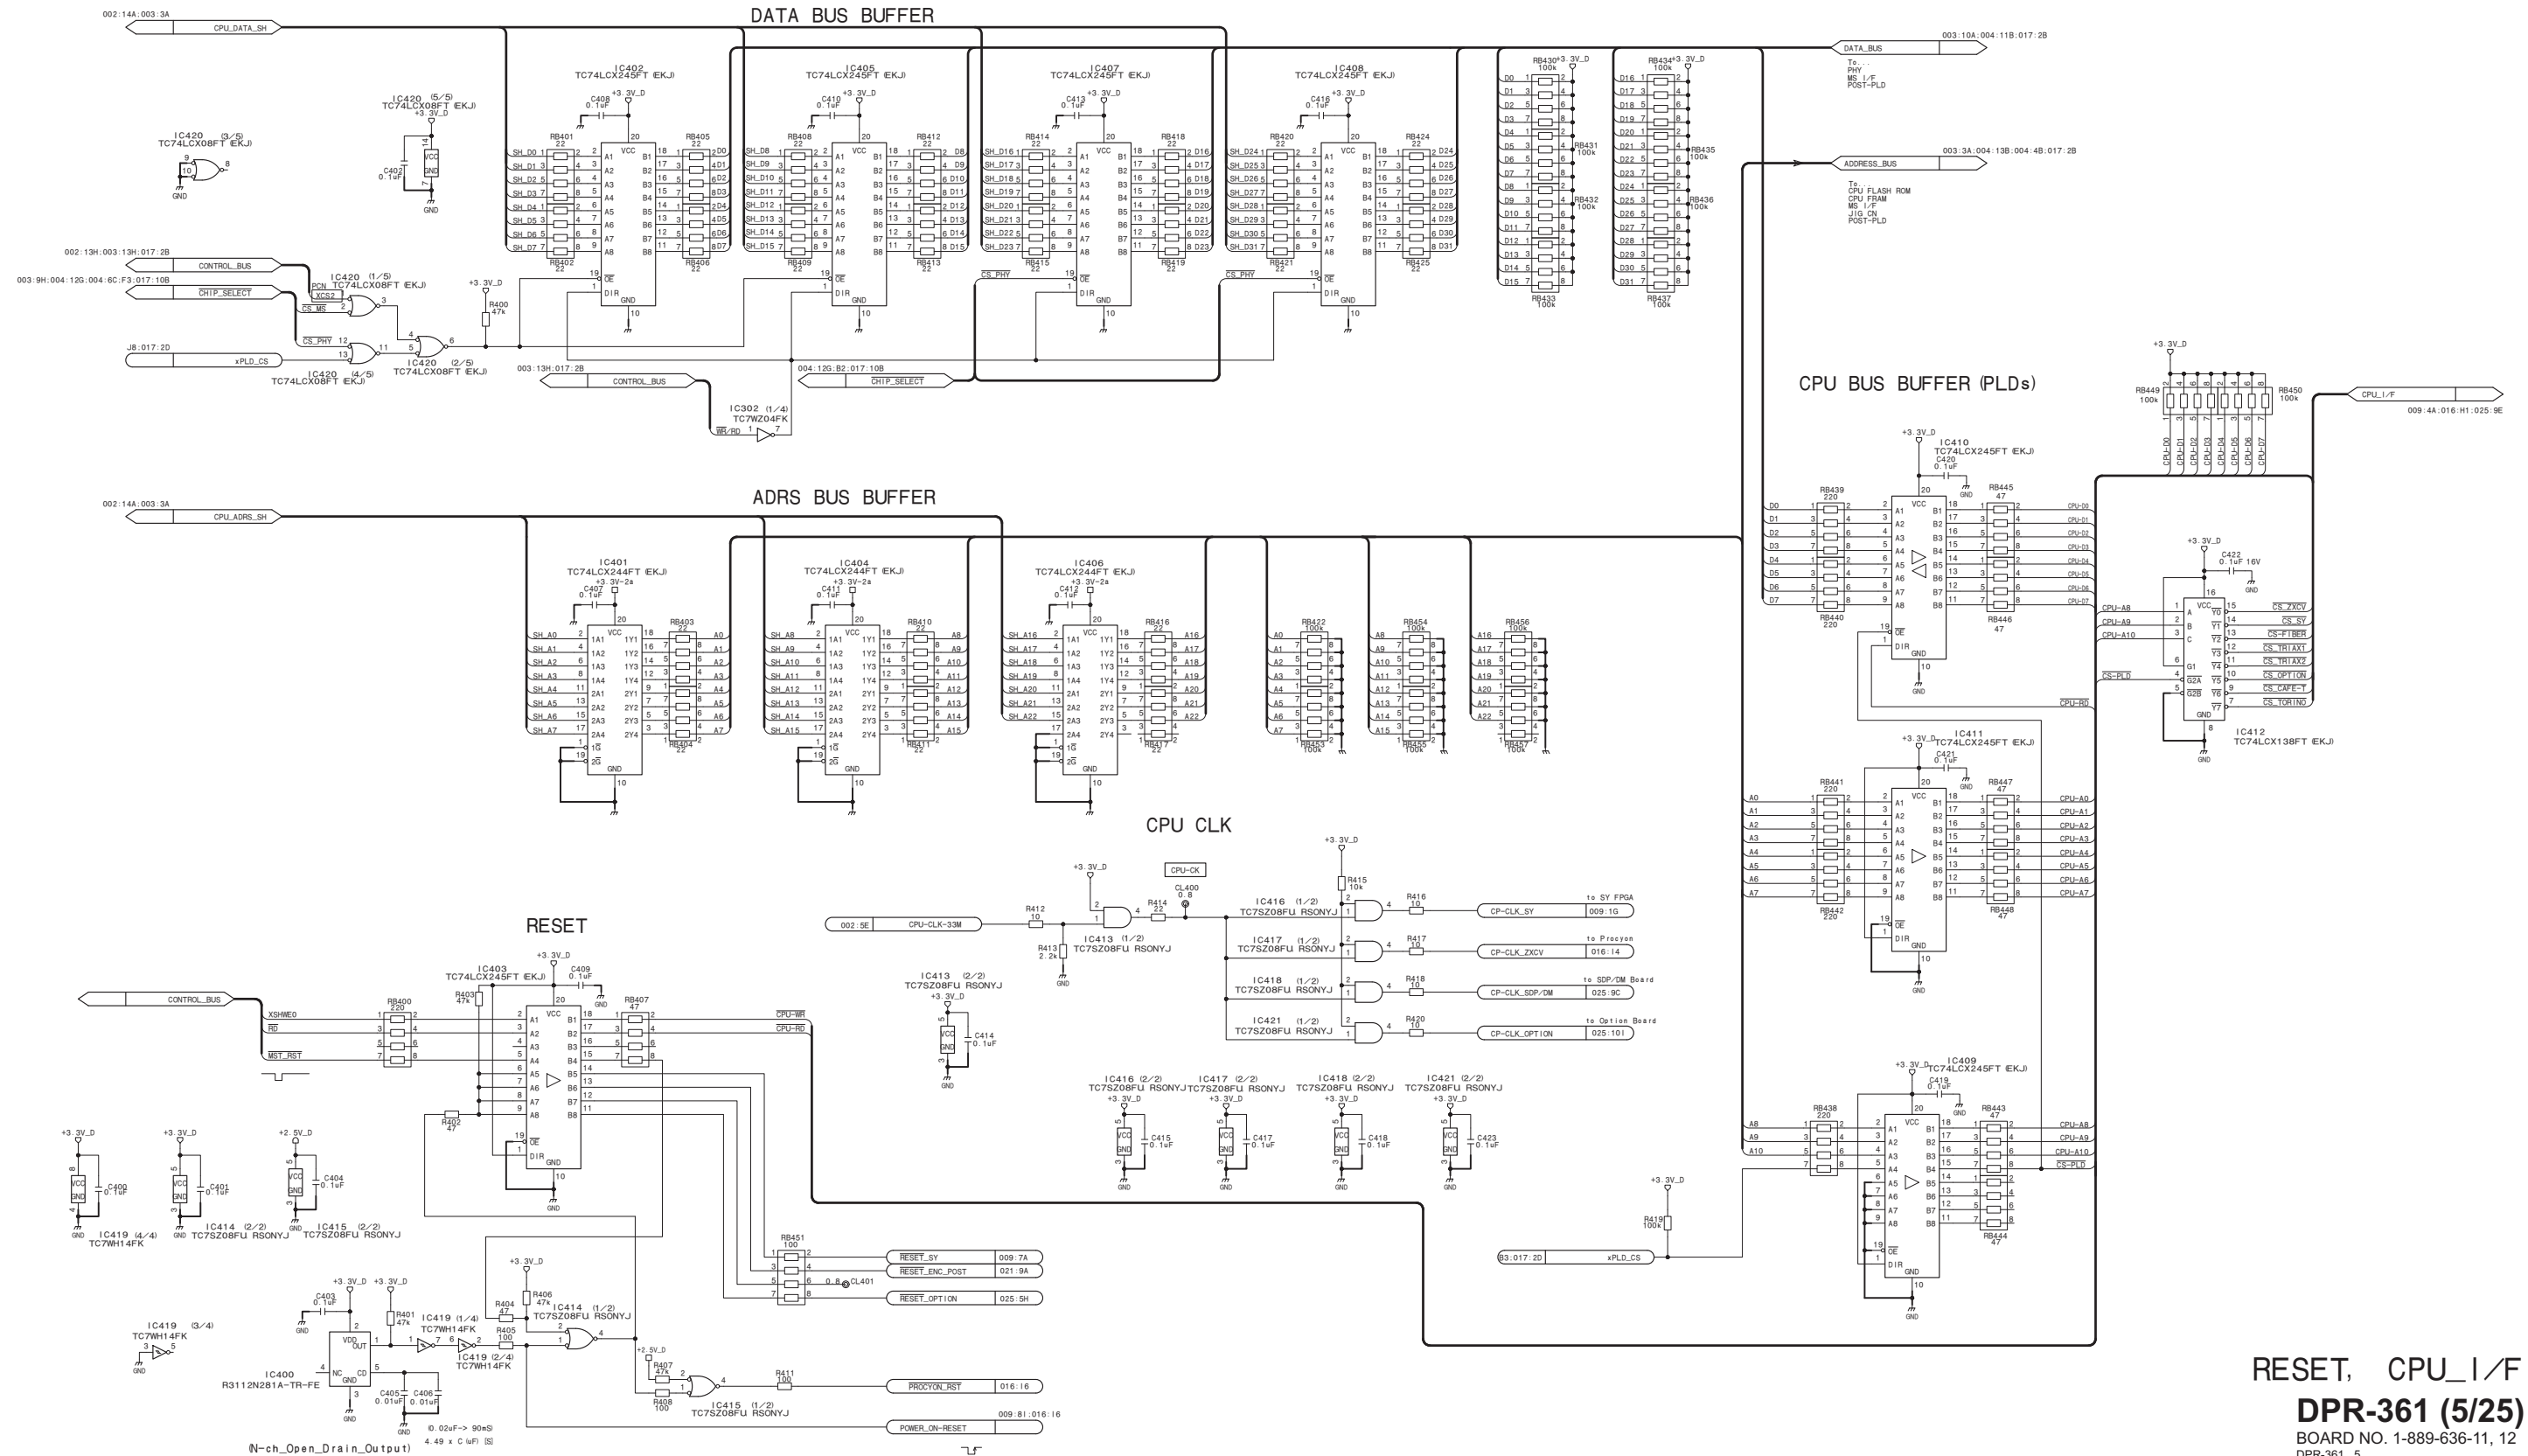


RESET, CPU_I/F
DPR-361 (5/25)
BOARD NO. 1-889-636-11, 12
DPR-361_5


DPR-361 (6/25)

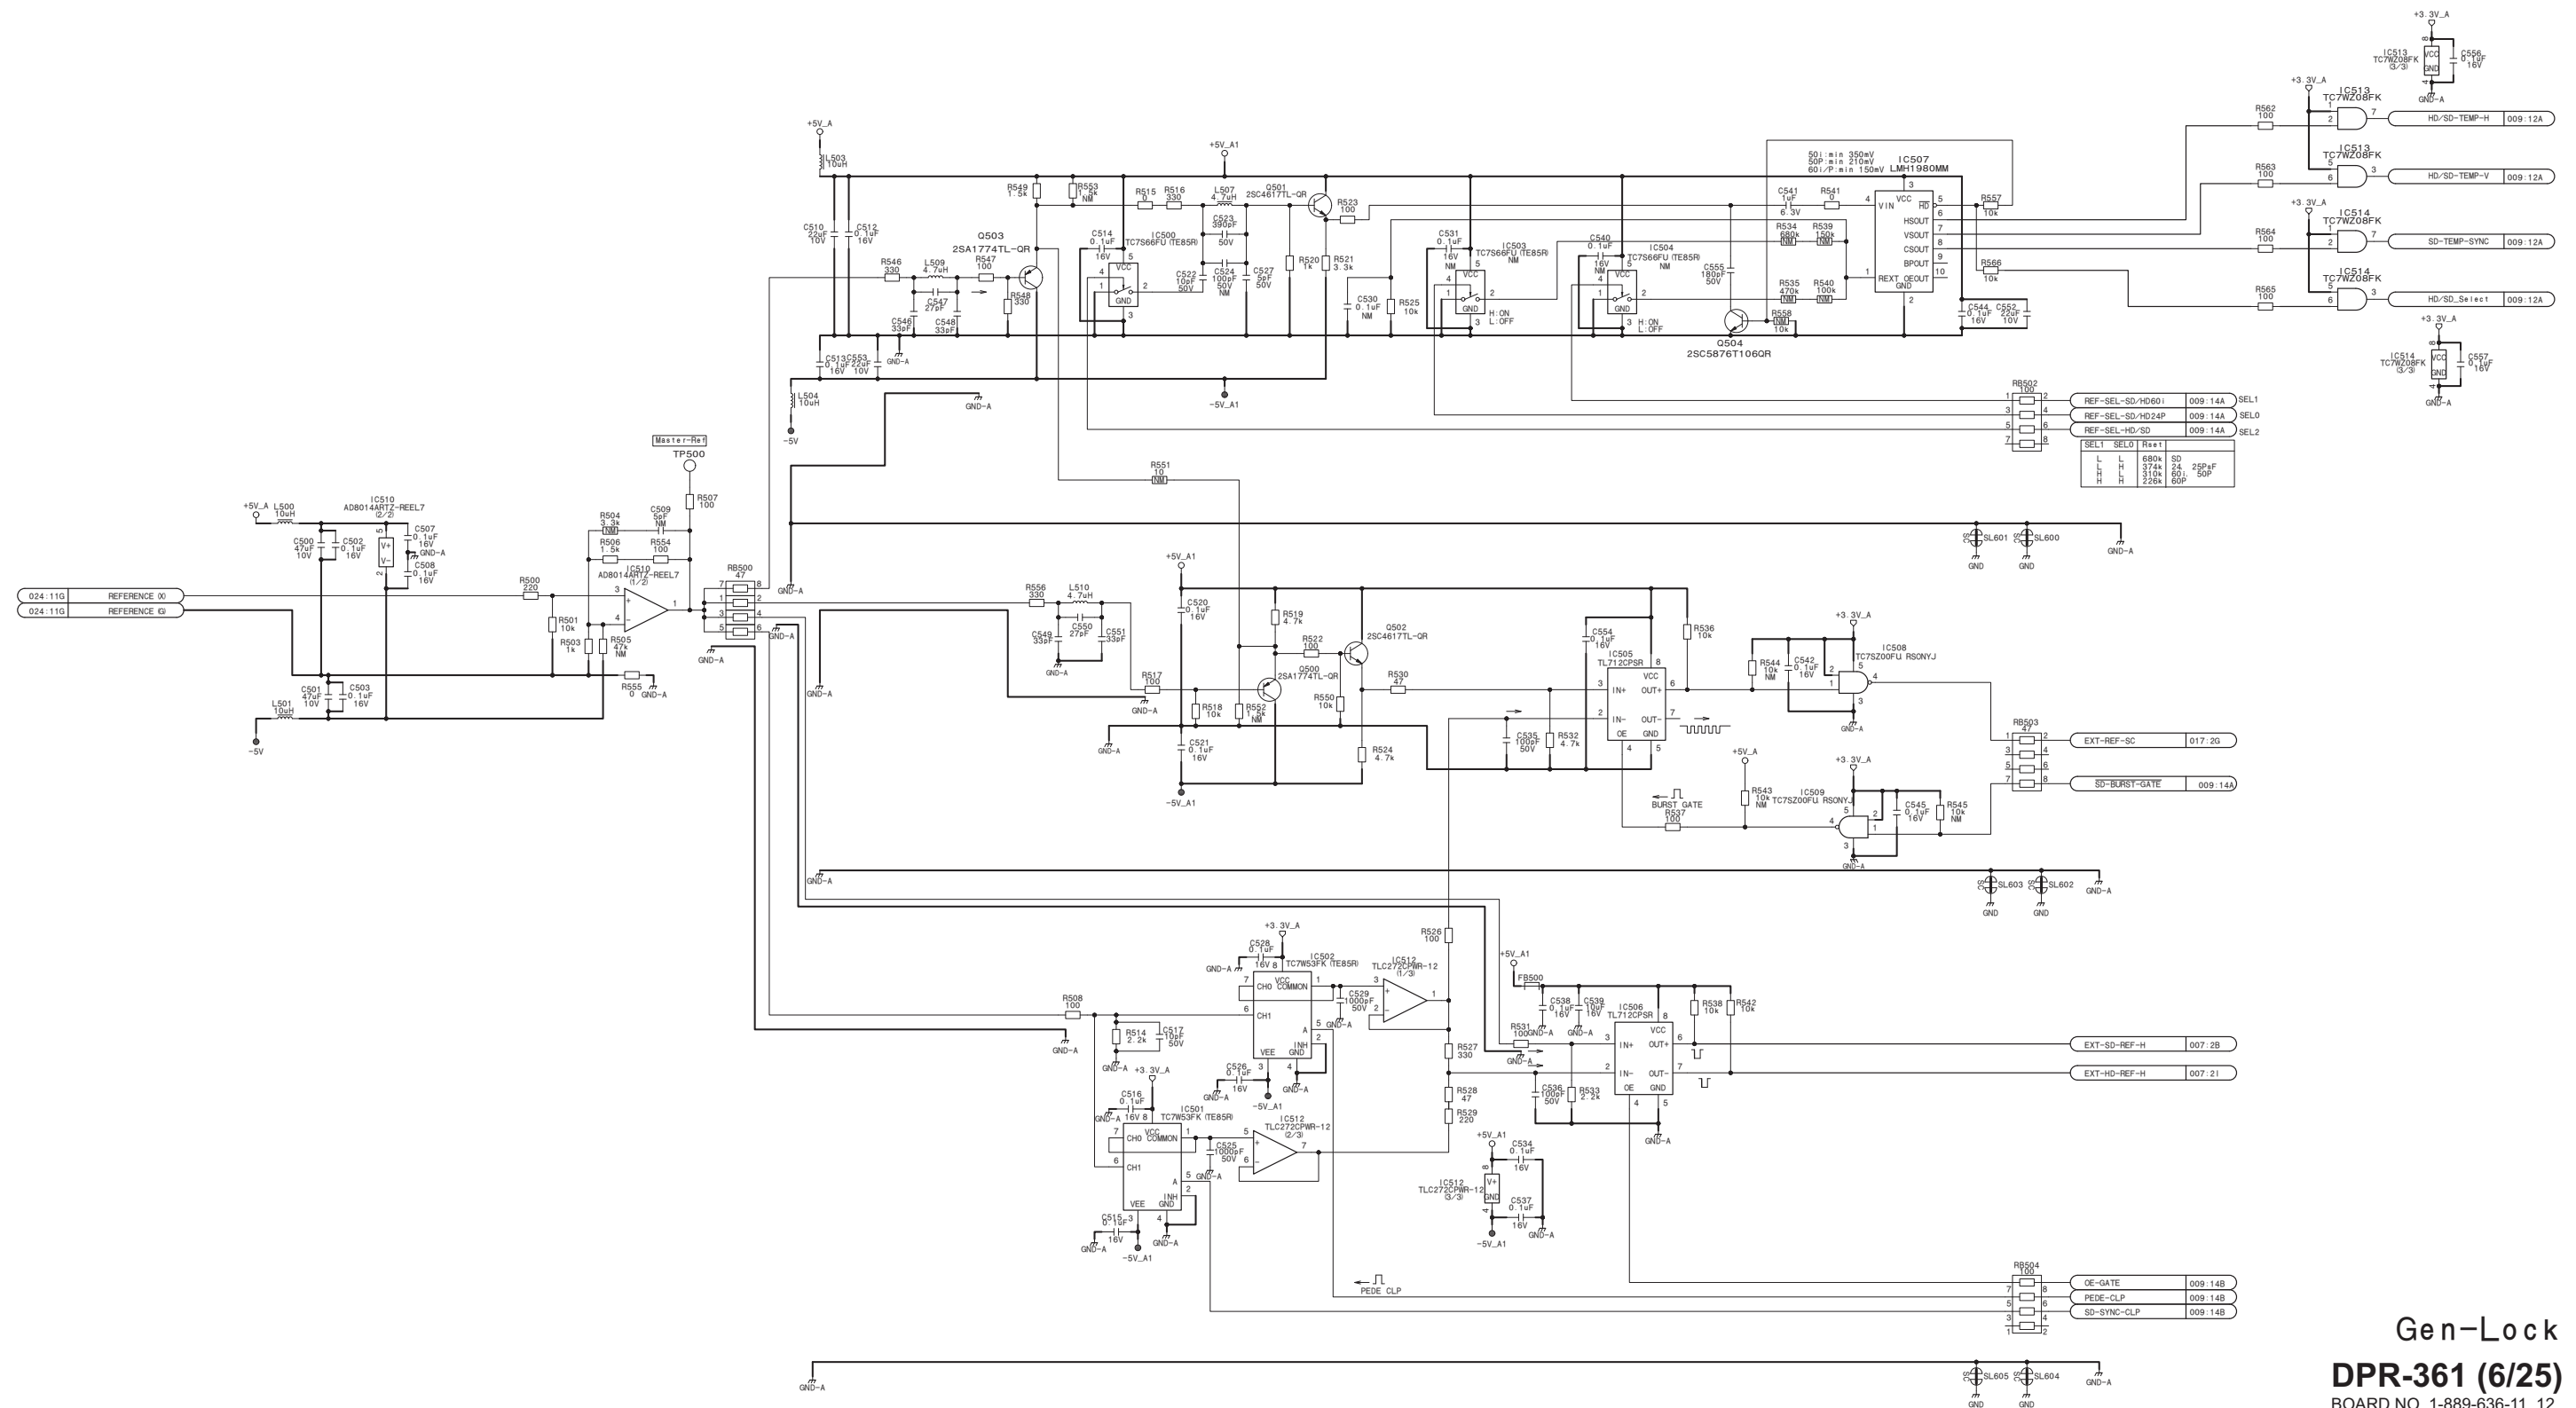


Gen-Lock
DPR-361 (6/25)
BOARD NO. 1-889-636-11, 12
DPR-361 _6

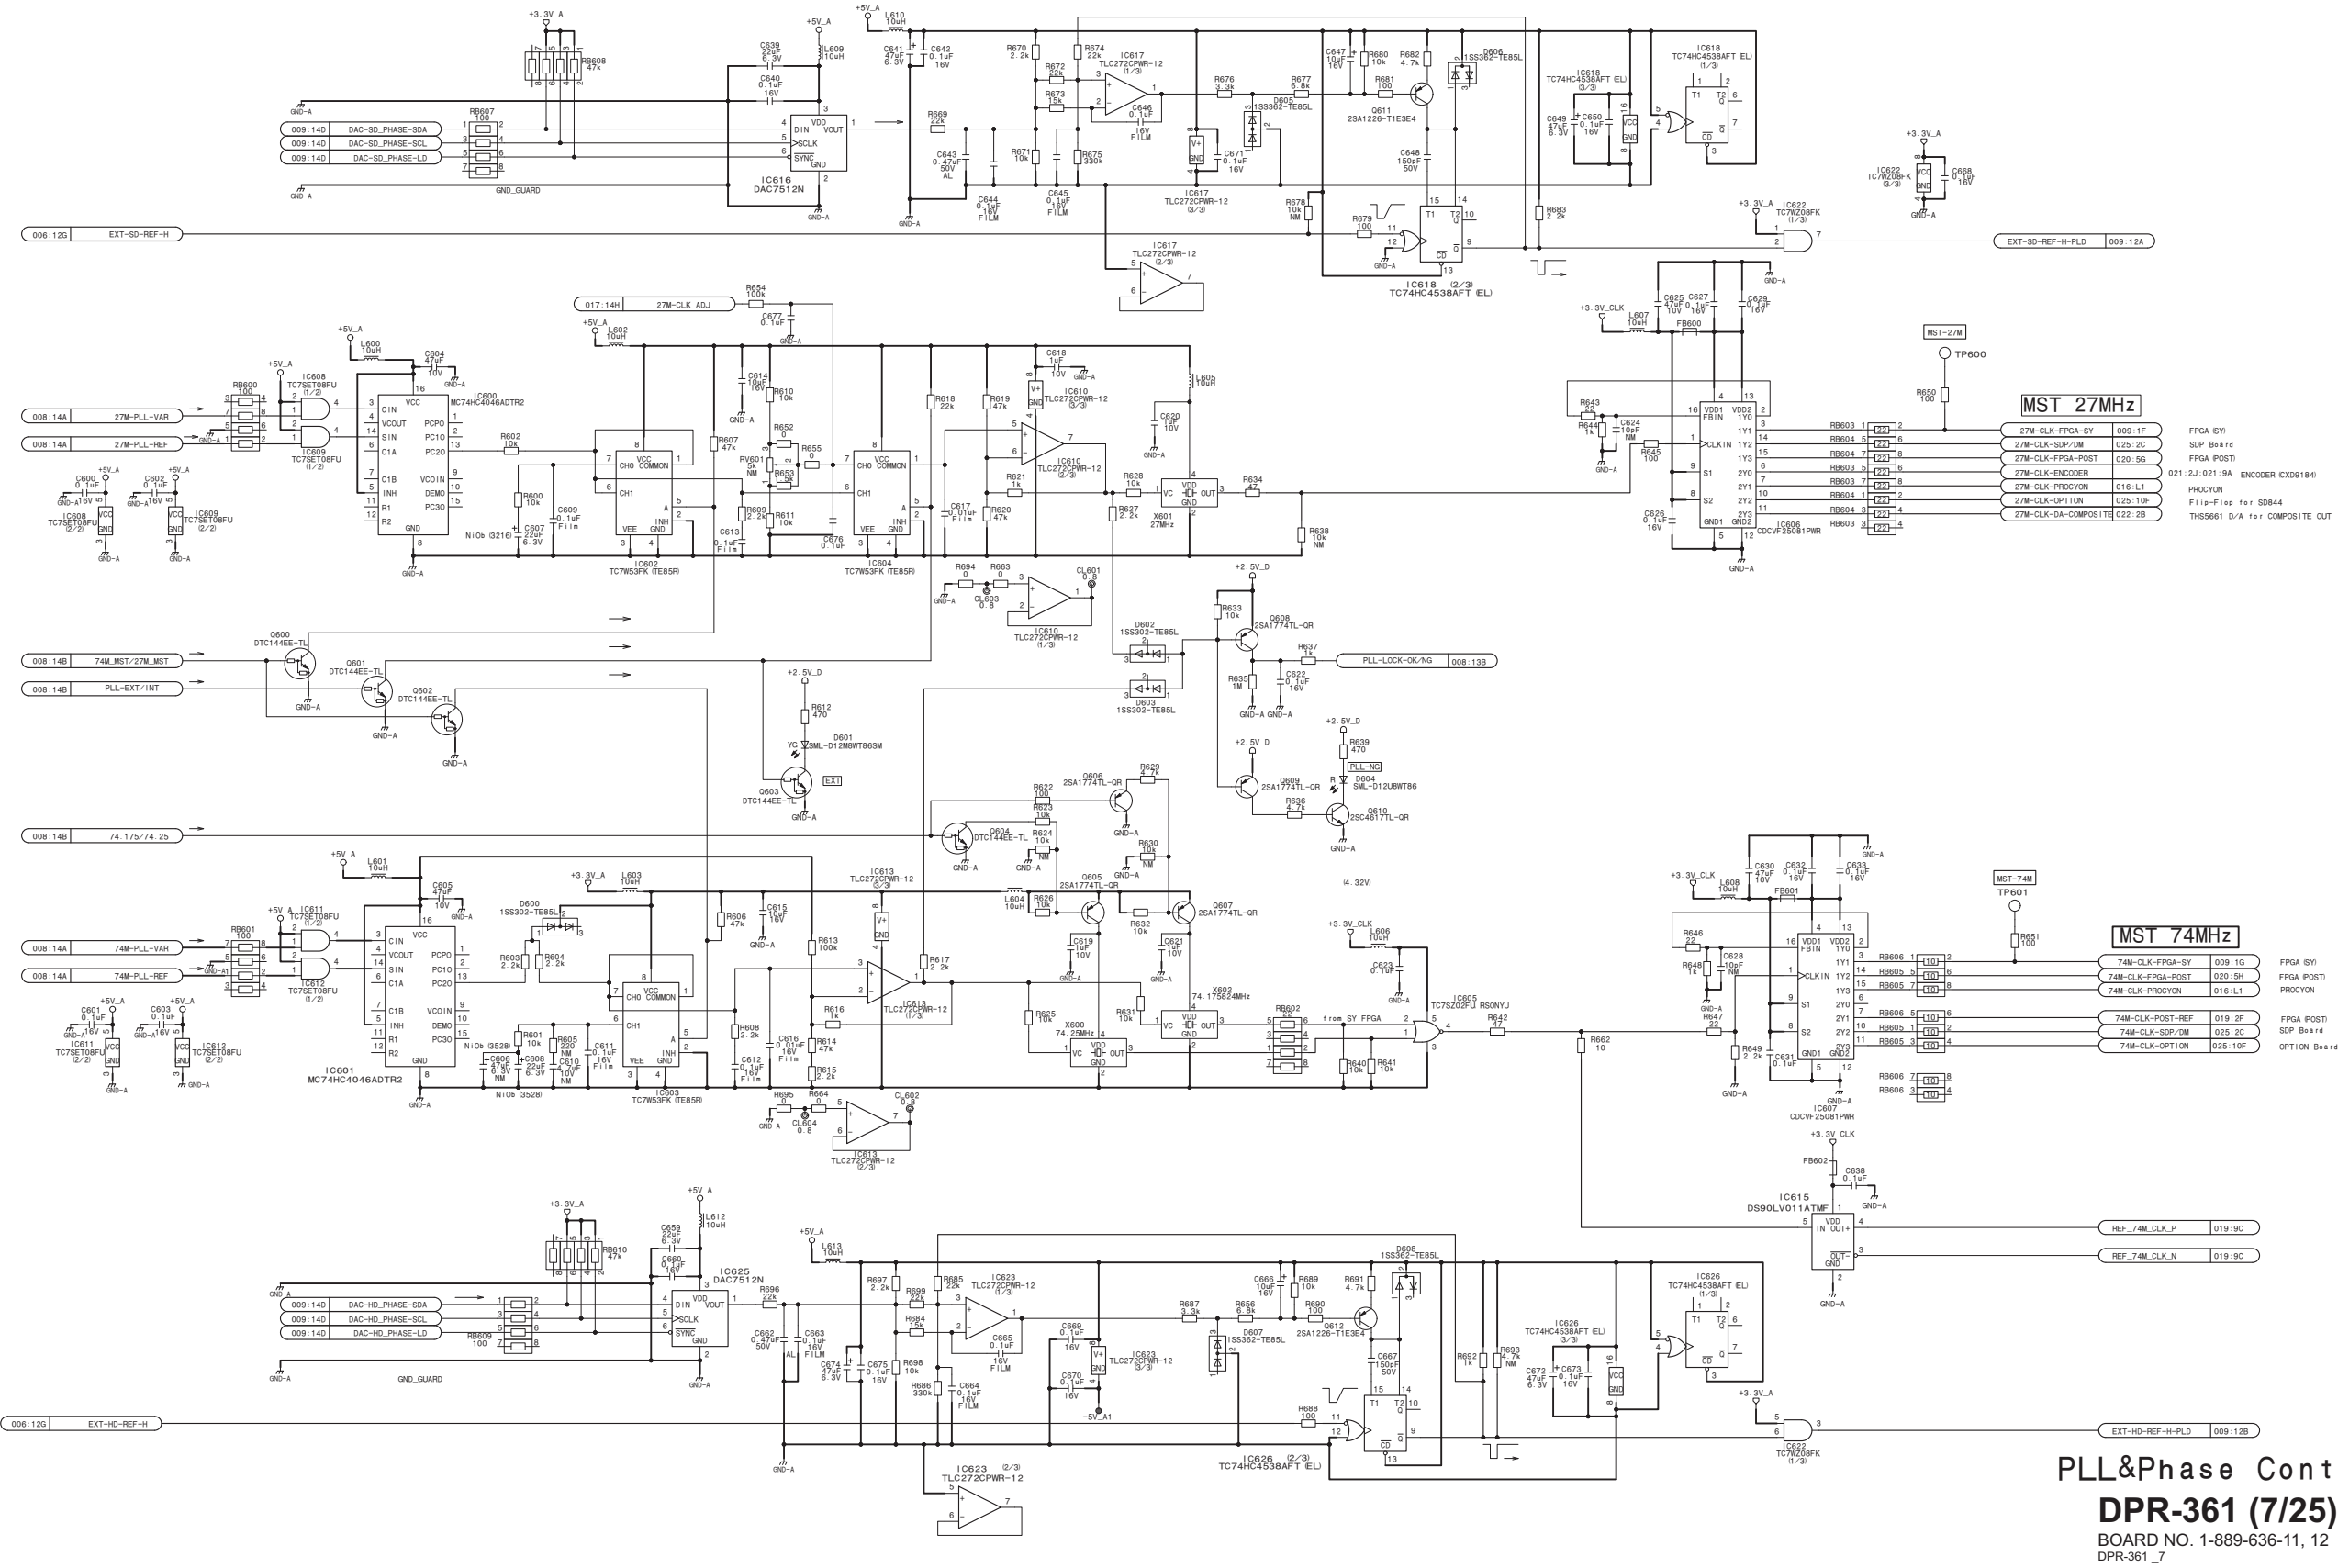

PLL&Phase Cont
DPR-361 (7/25)
BOARD NO. 1-889-636-11, 12
DPR-361_7

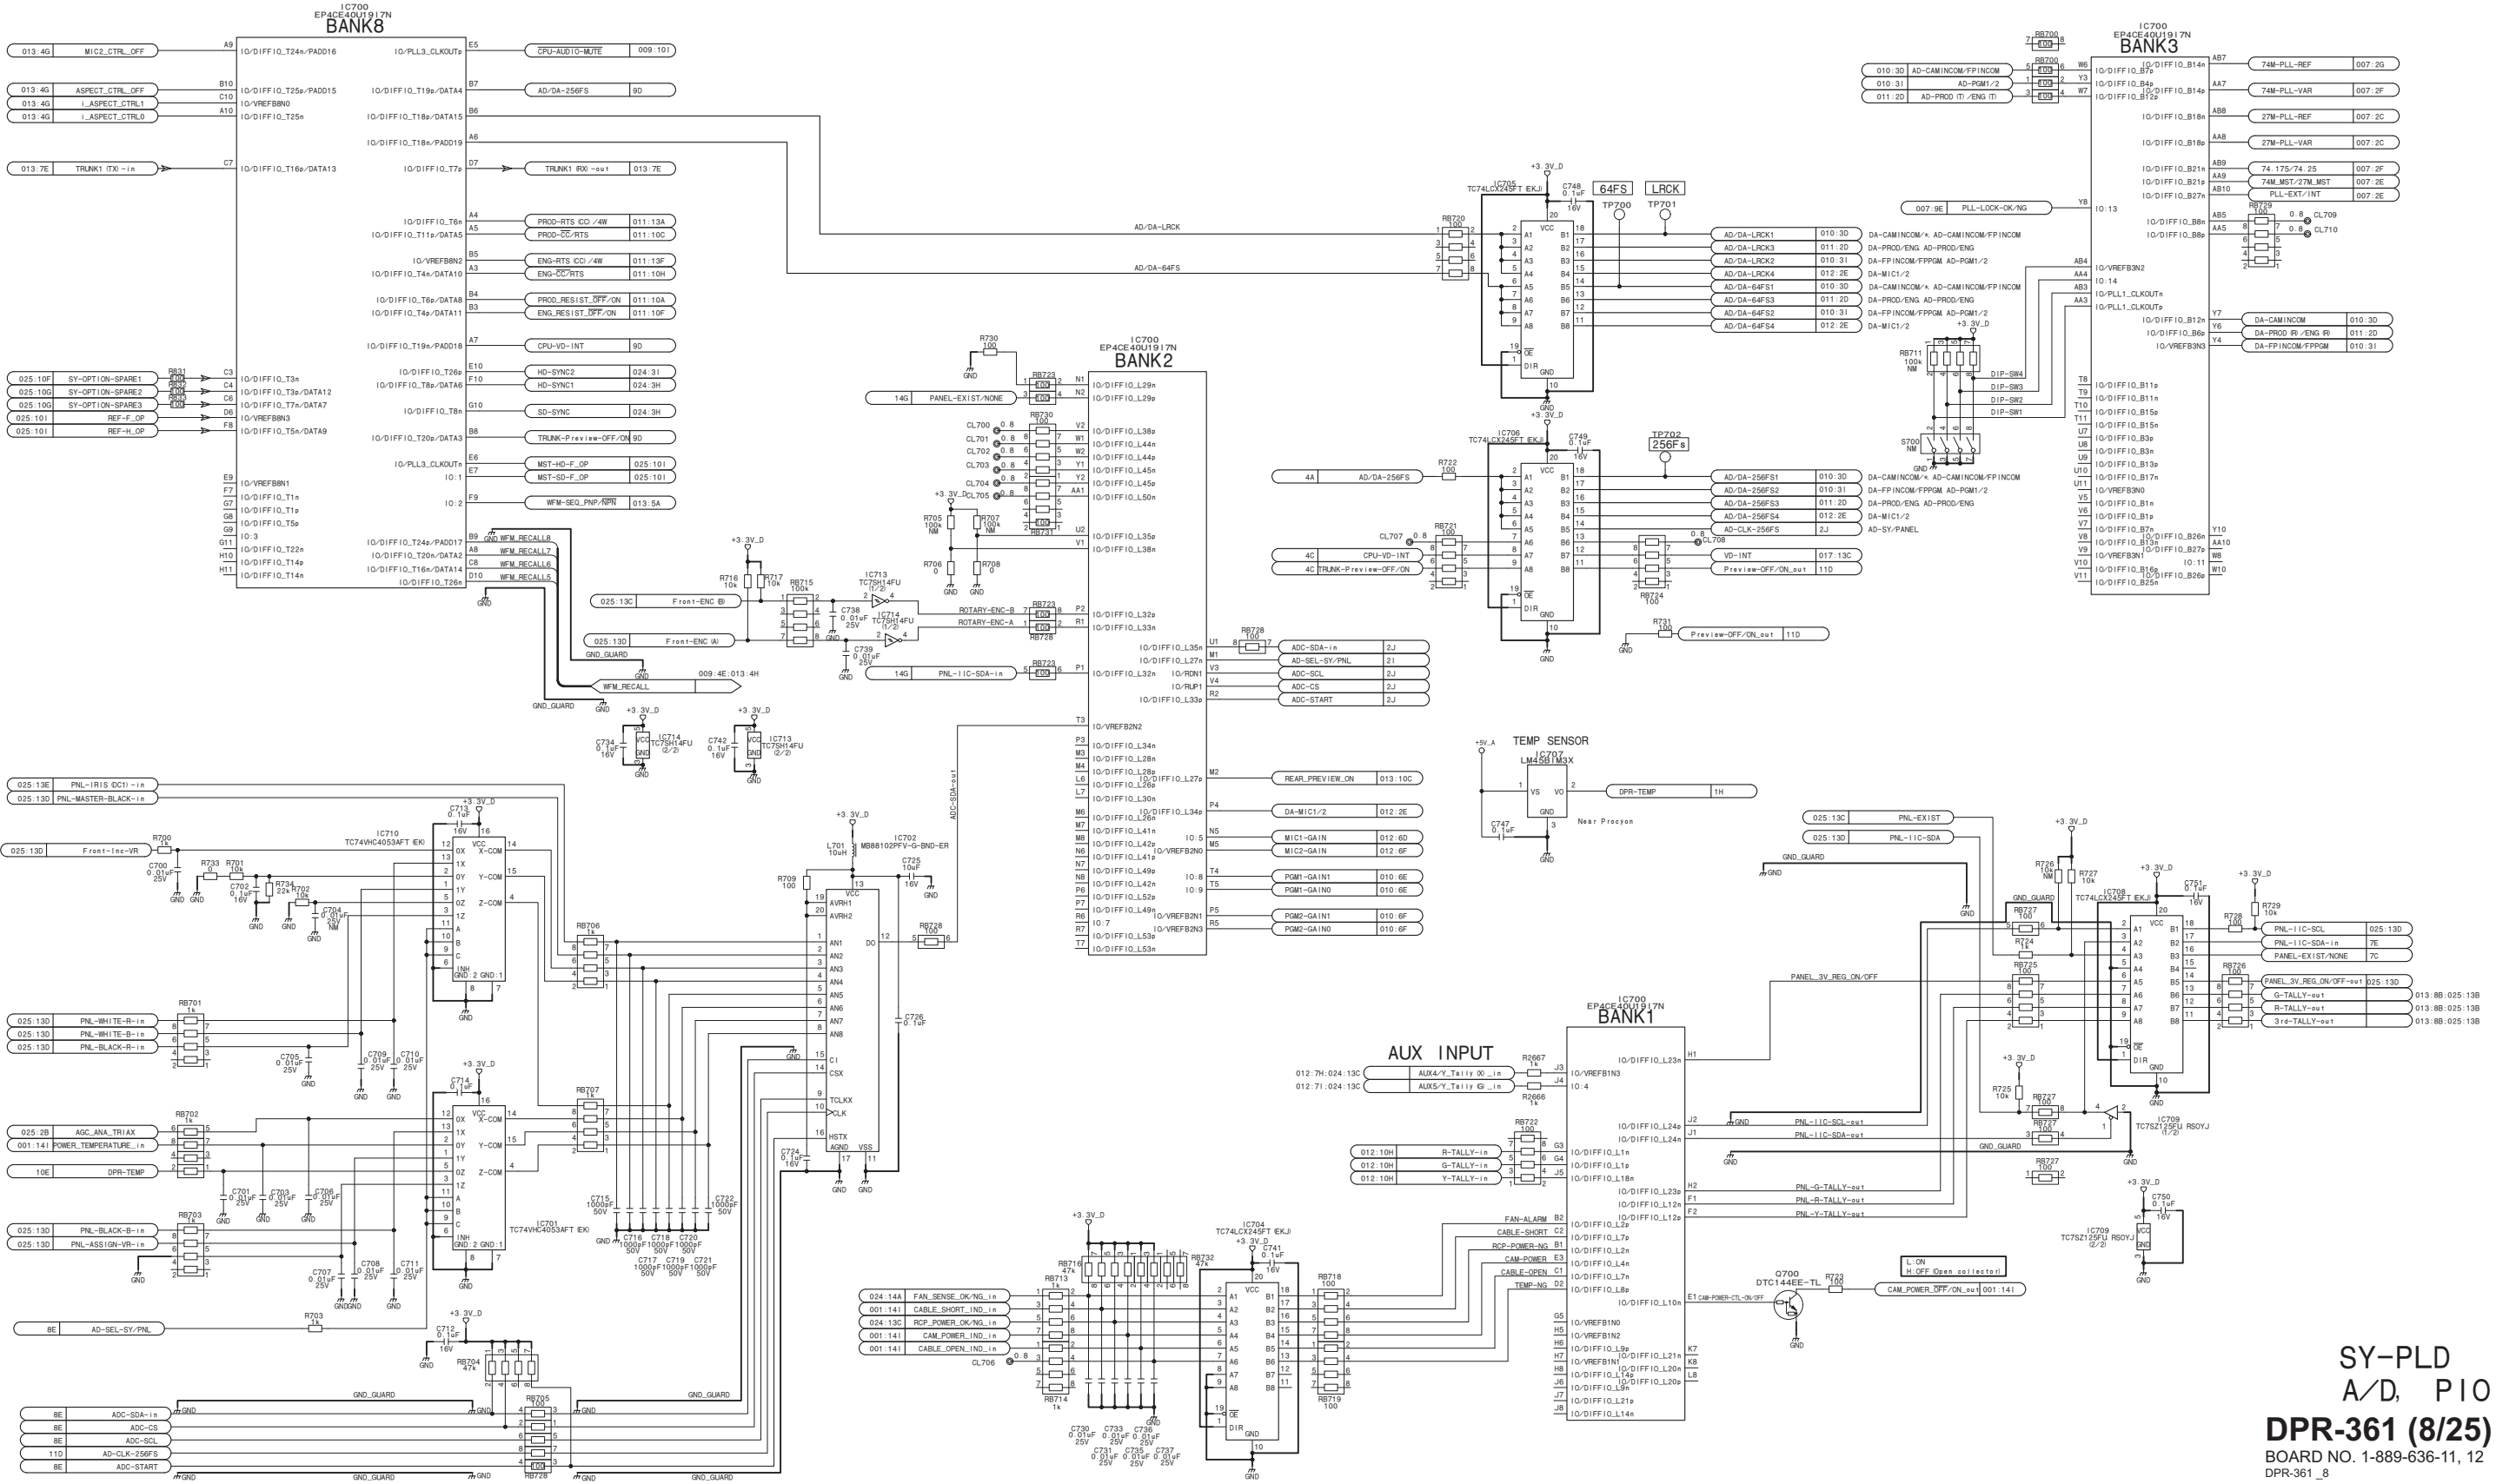


SY-PLD
A/D, PIO
DPR-361 (8/25)
BOARD NO. 1-889-636-11, 12
DPR-361_8

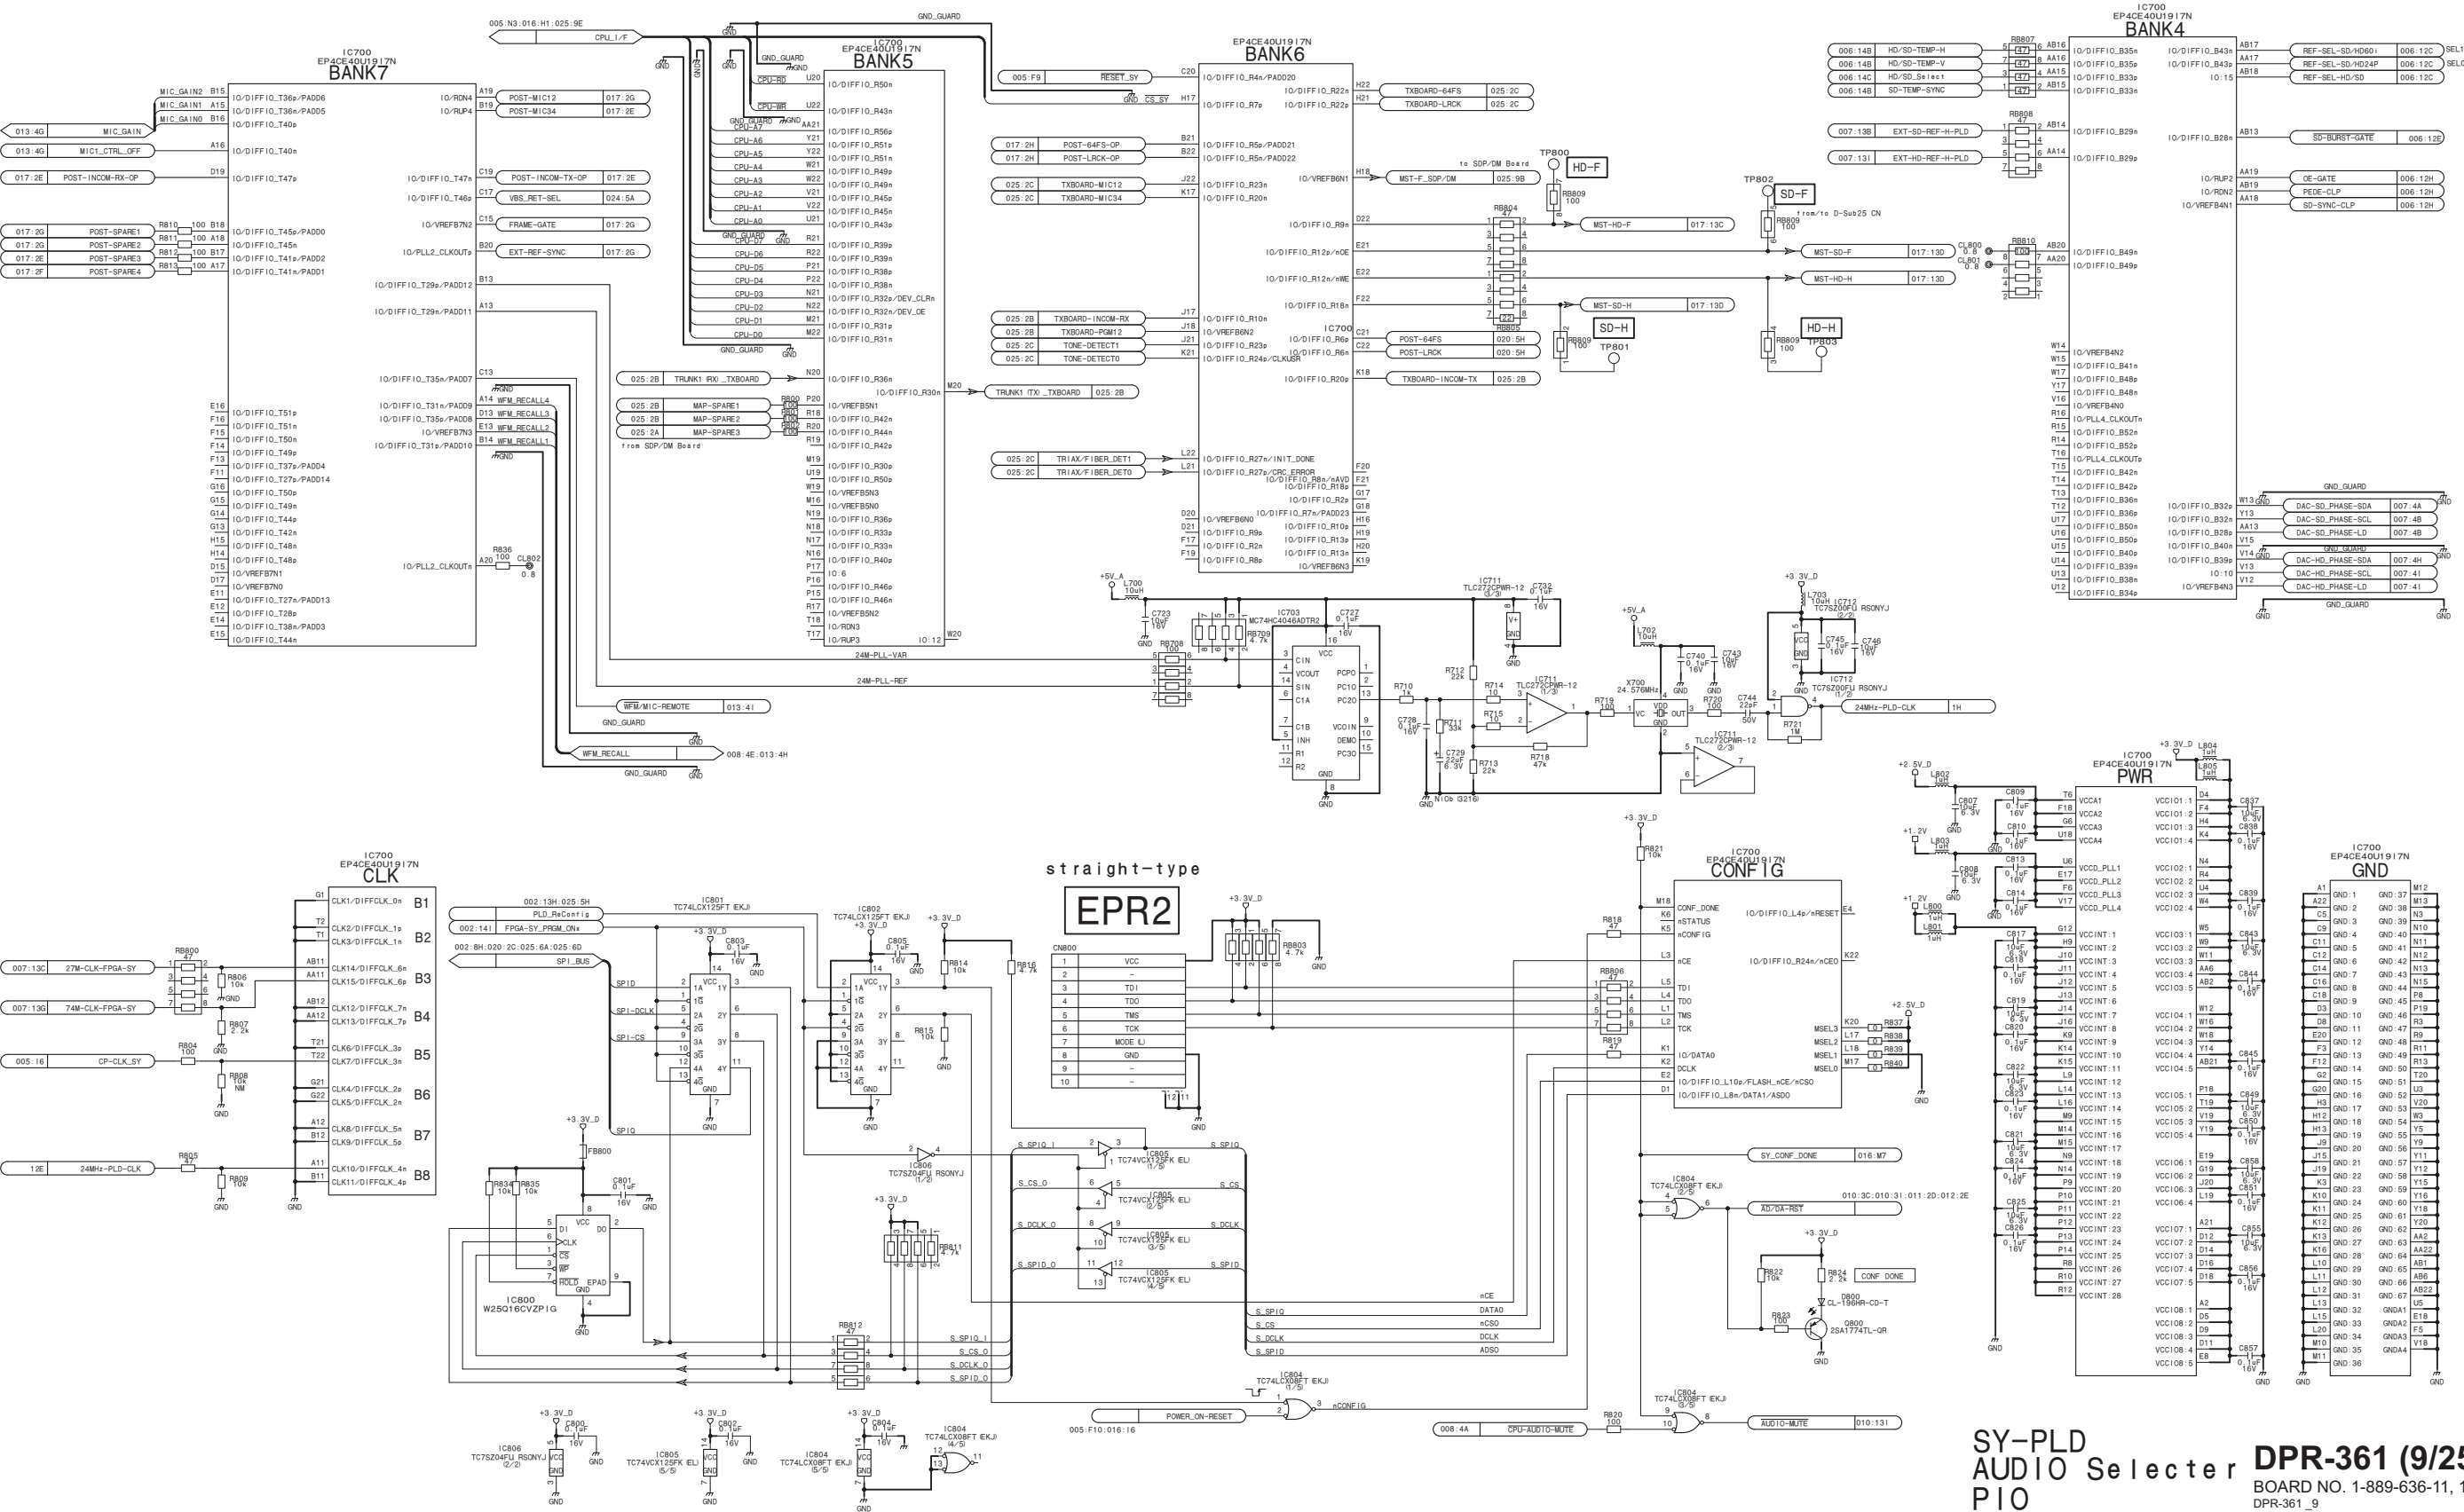

SY-PLD
AUDIO Selecter
PIO



DPR-361 (9/25)
BOARD NO. 1-889-636-11, 12
DPR-361_9

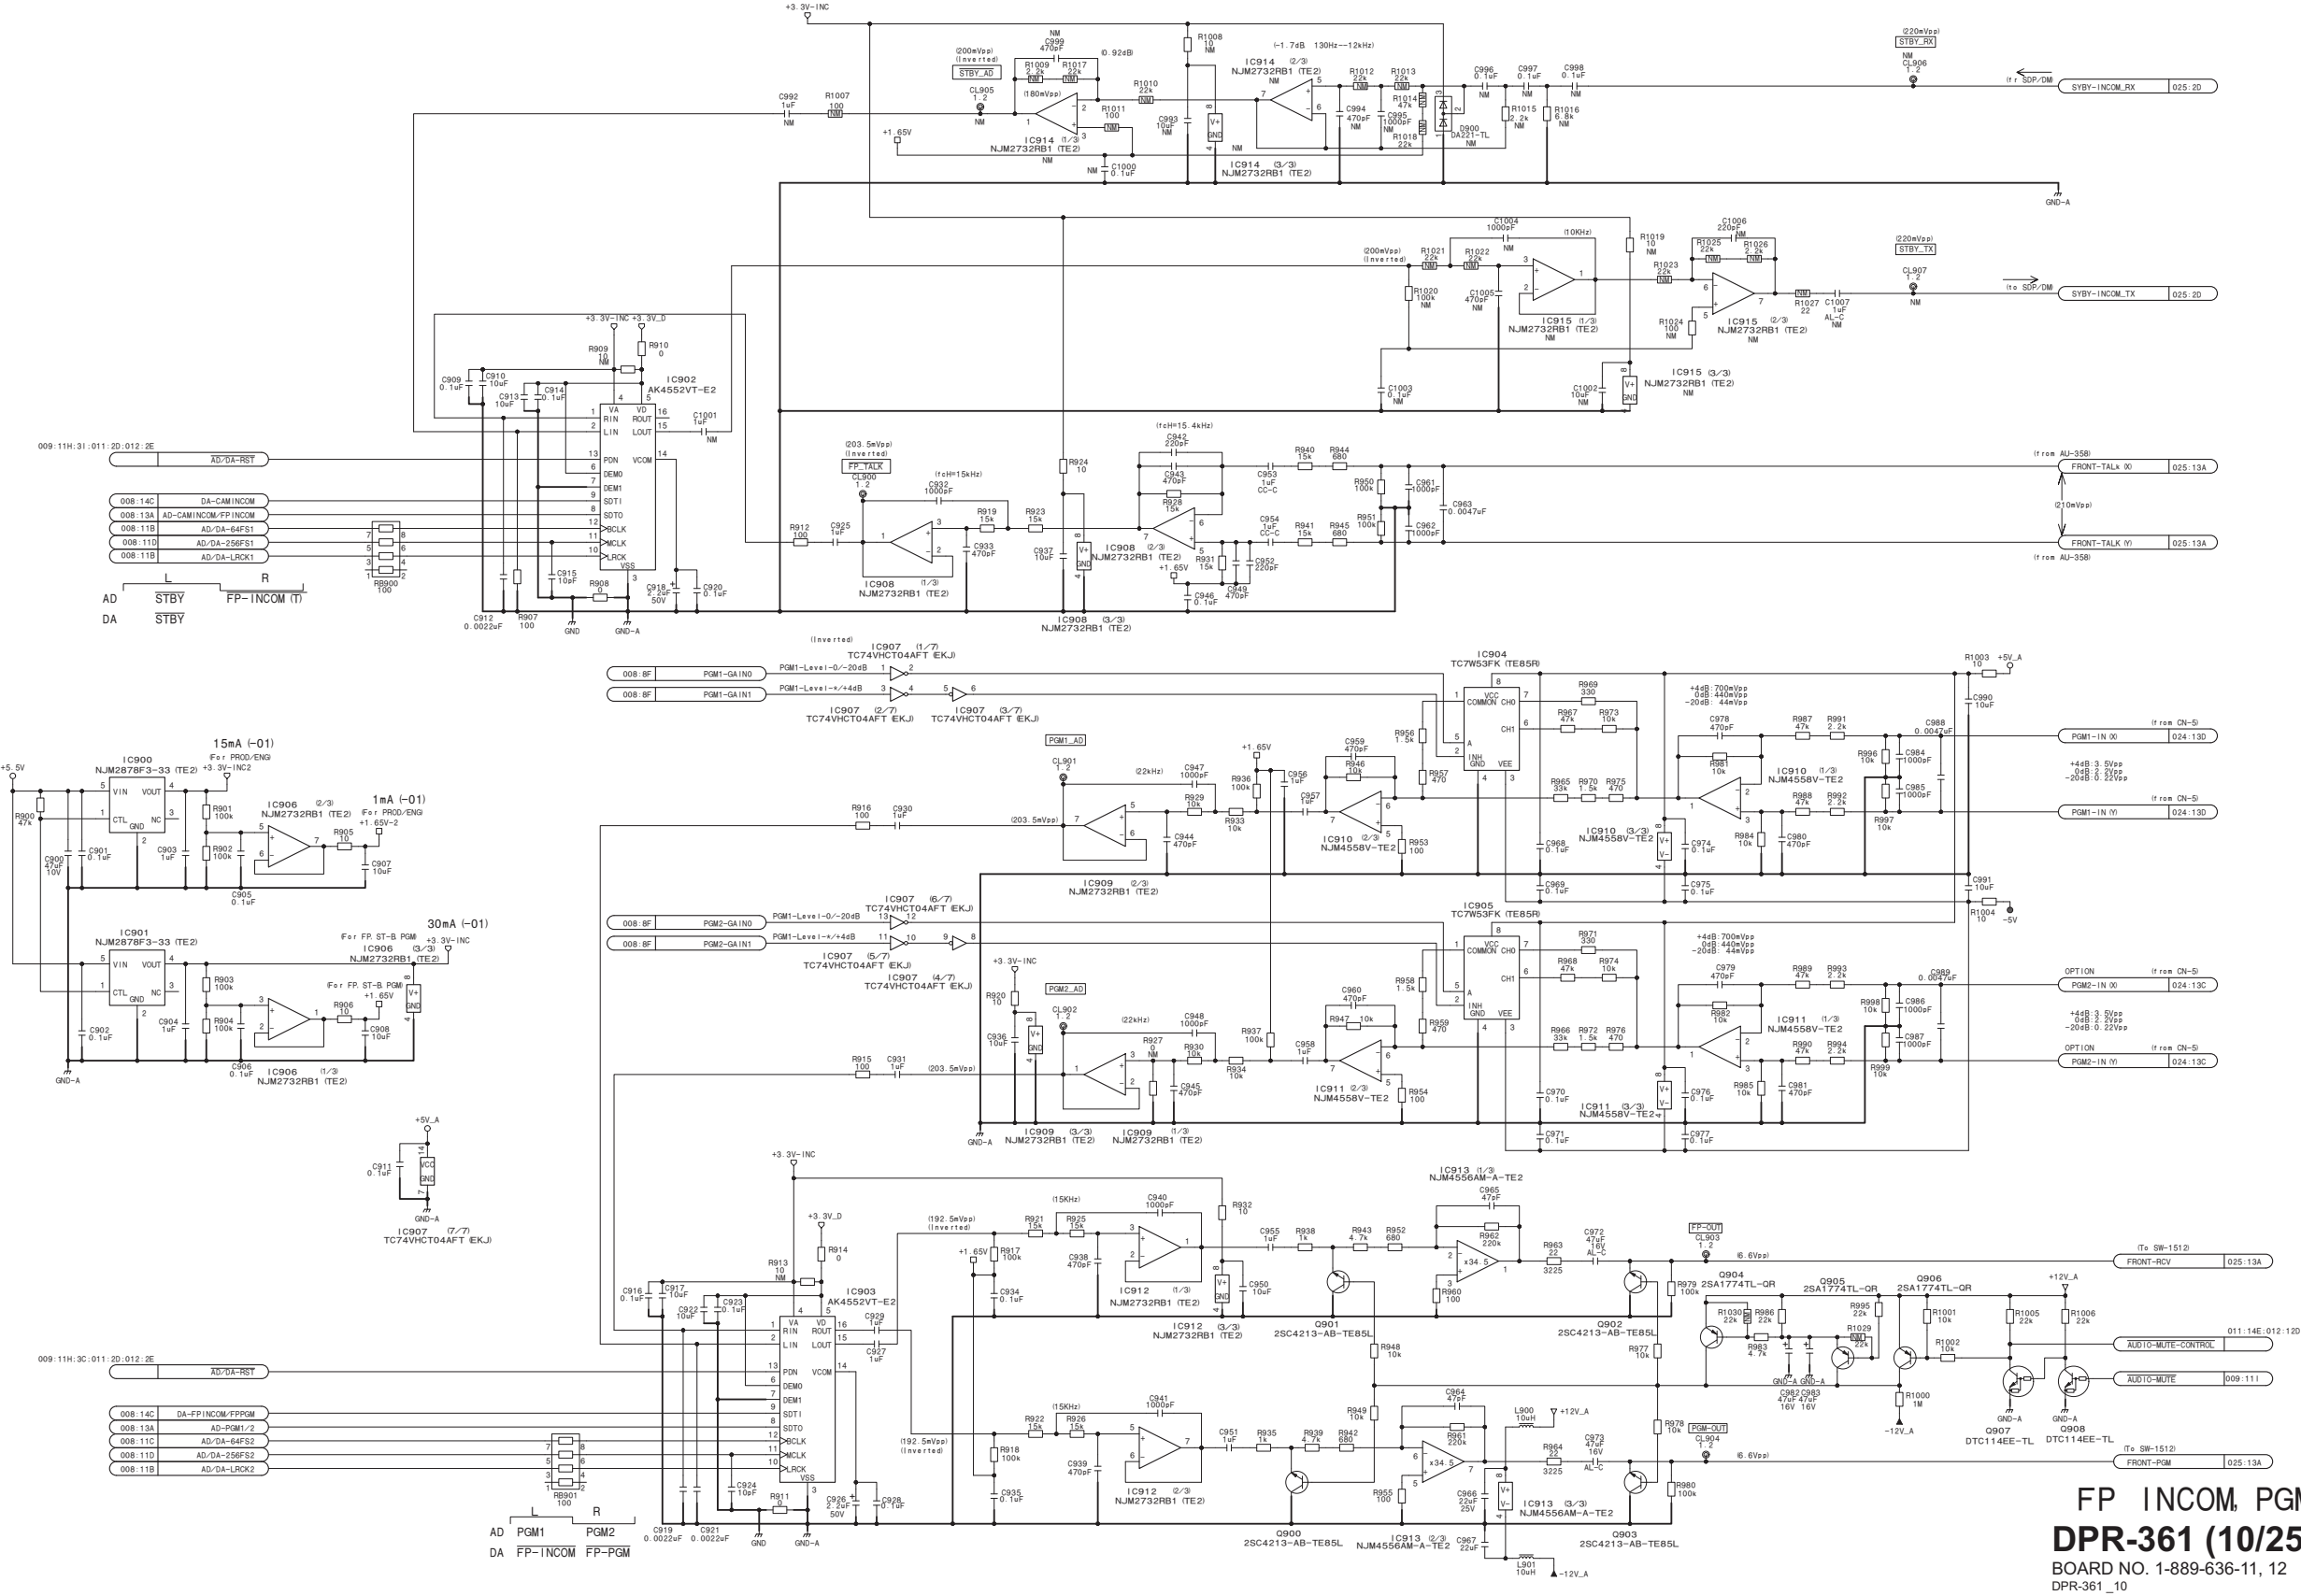


FP INCOM, PGM
DPR-361 (10/25)
BOARD NO. 1-889-636-11, 12
DPR-361_10

REAR INCOM
DPR-361 (11/25)
BOARD NO. 1-889-636-11, 12
DPR-361_11

DPR-361 (12/25)

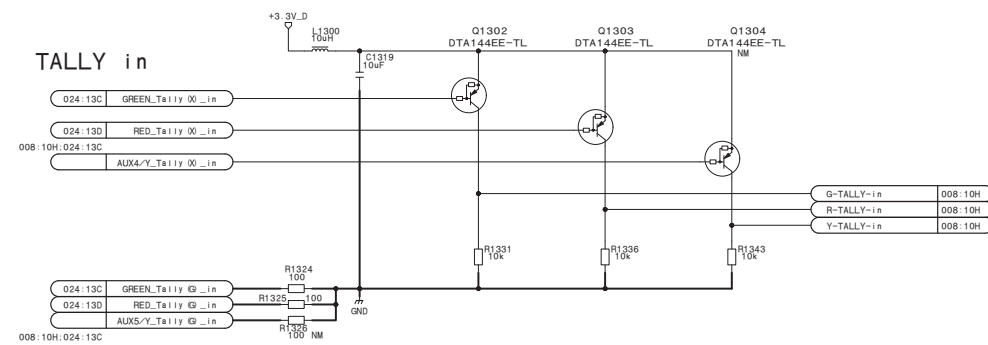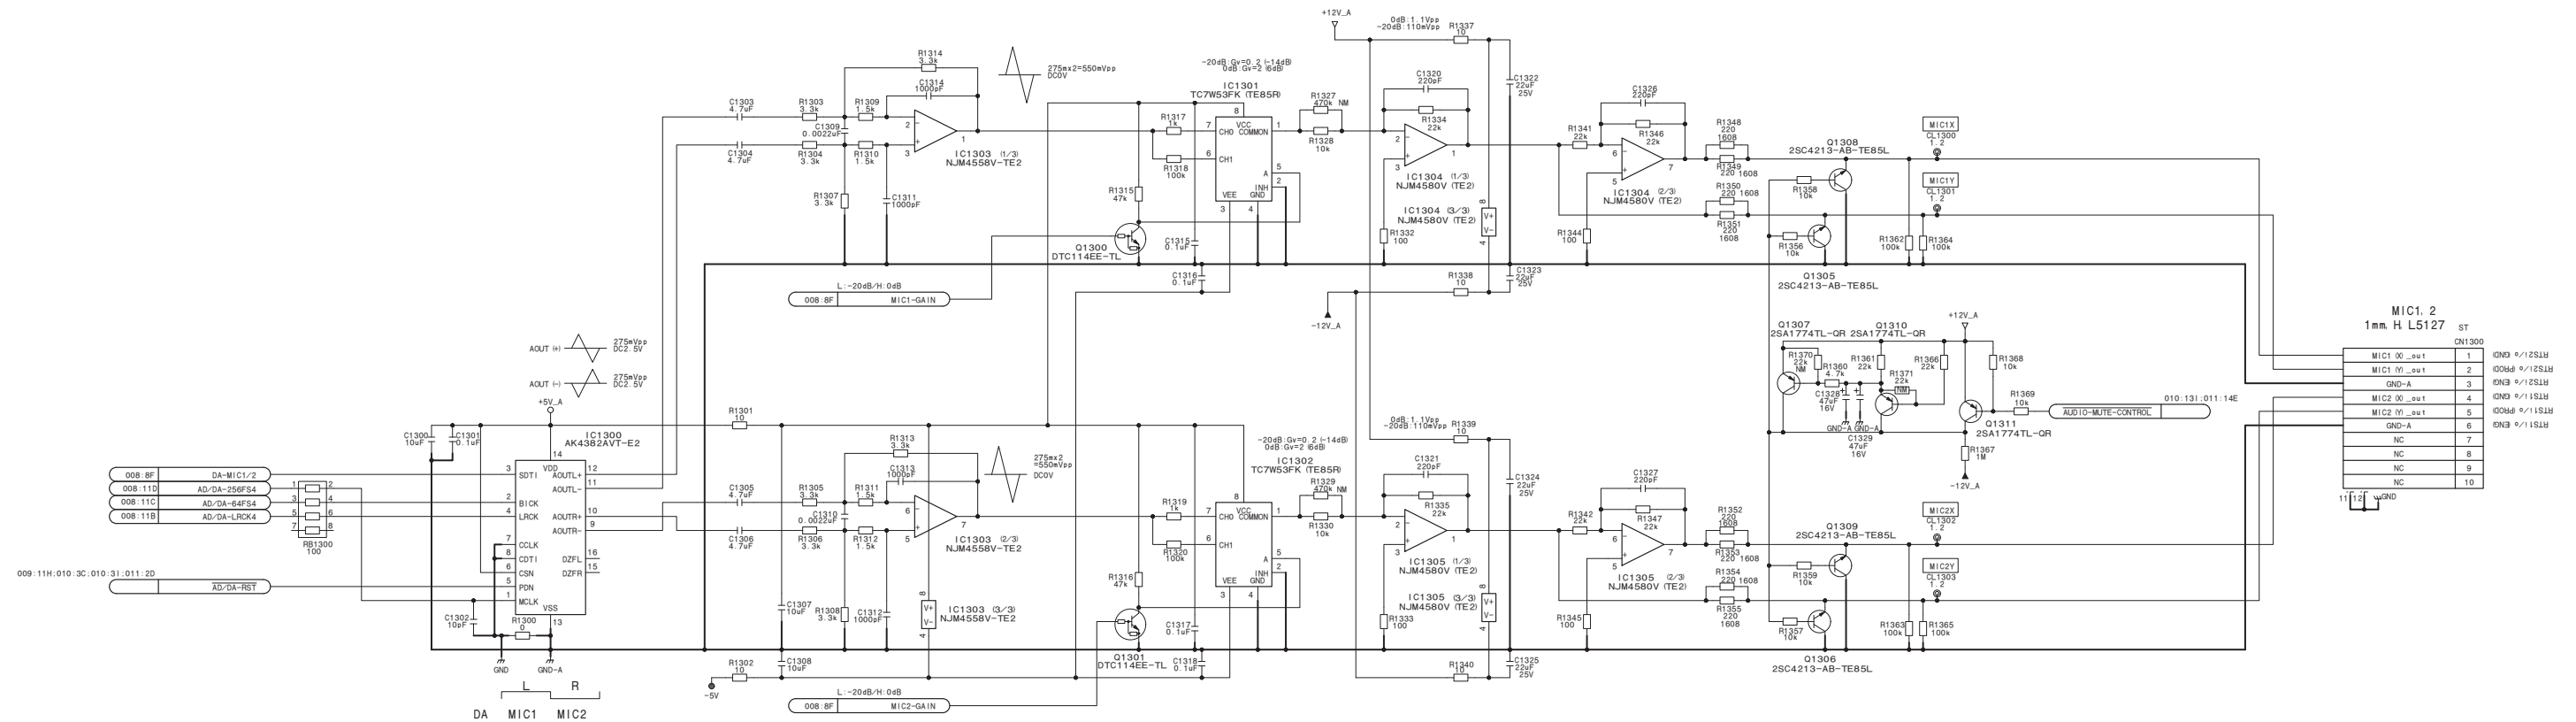


MIC, TALLY
DPR-361 (12/25)
BOARD NO. 1-889-636-11, 12
DPR-361_12

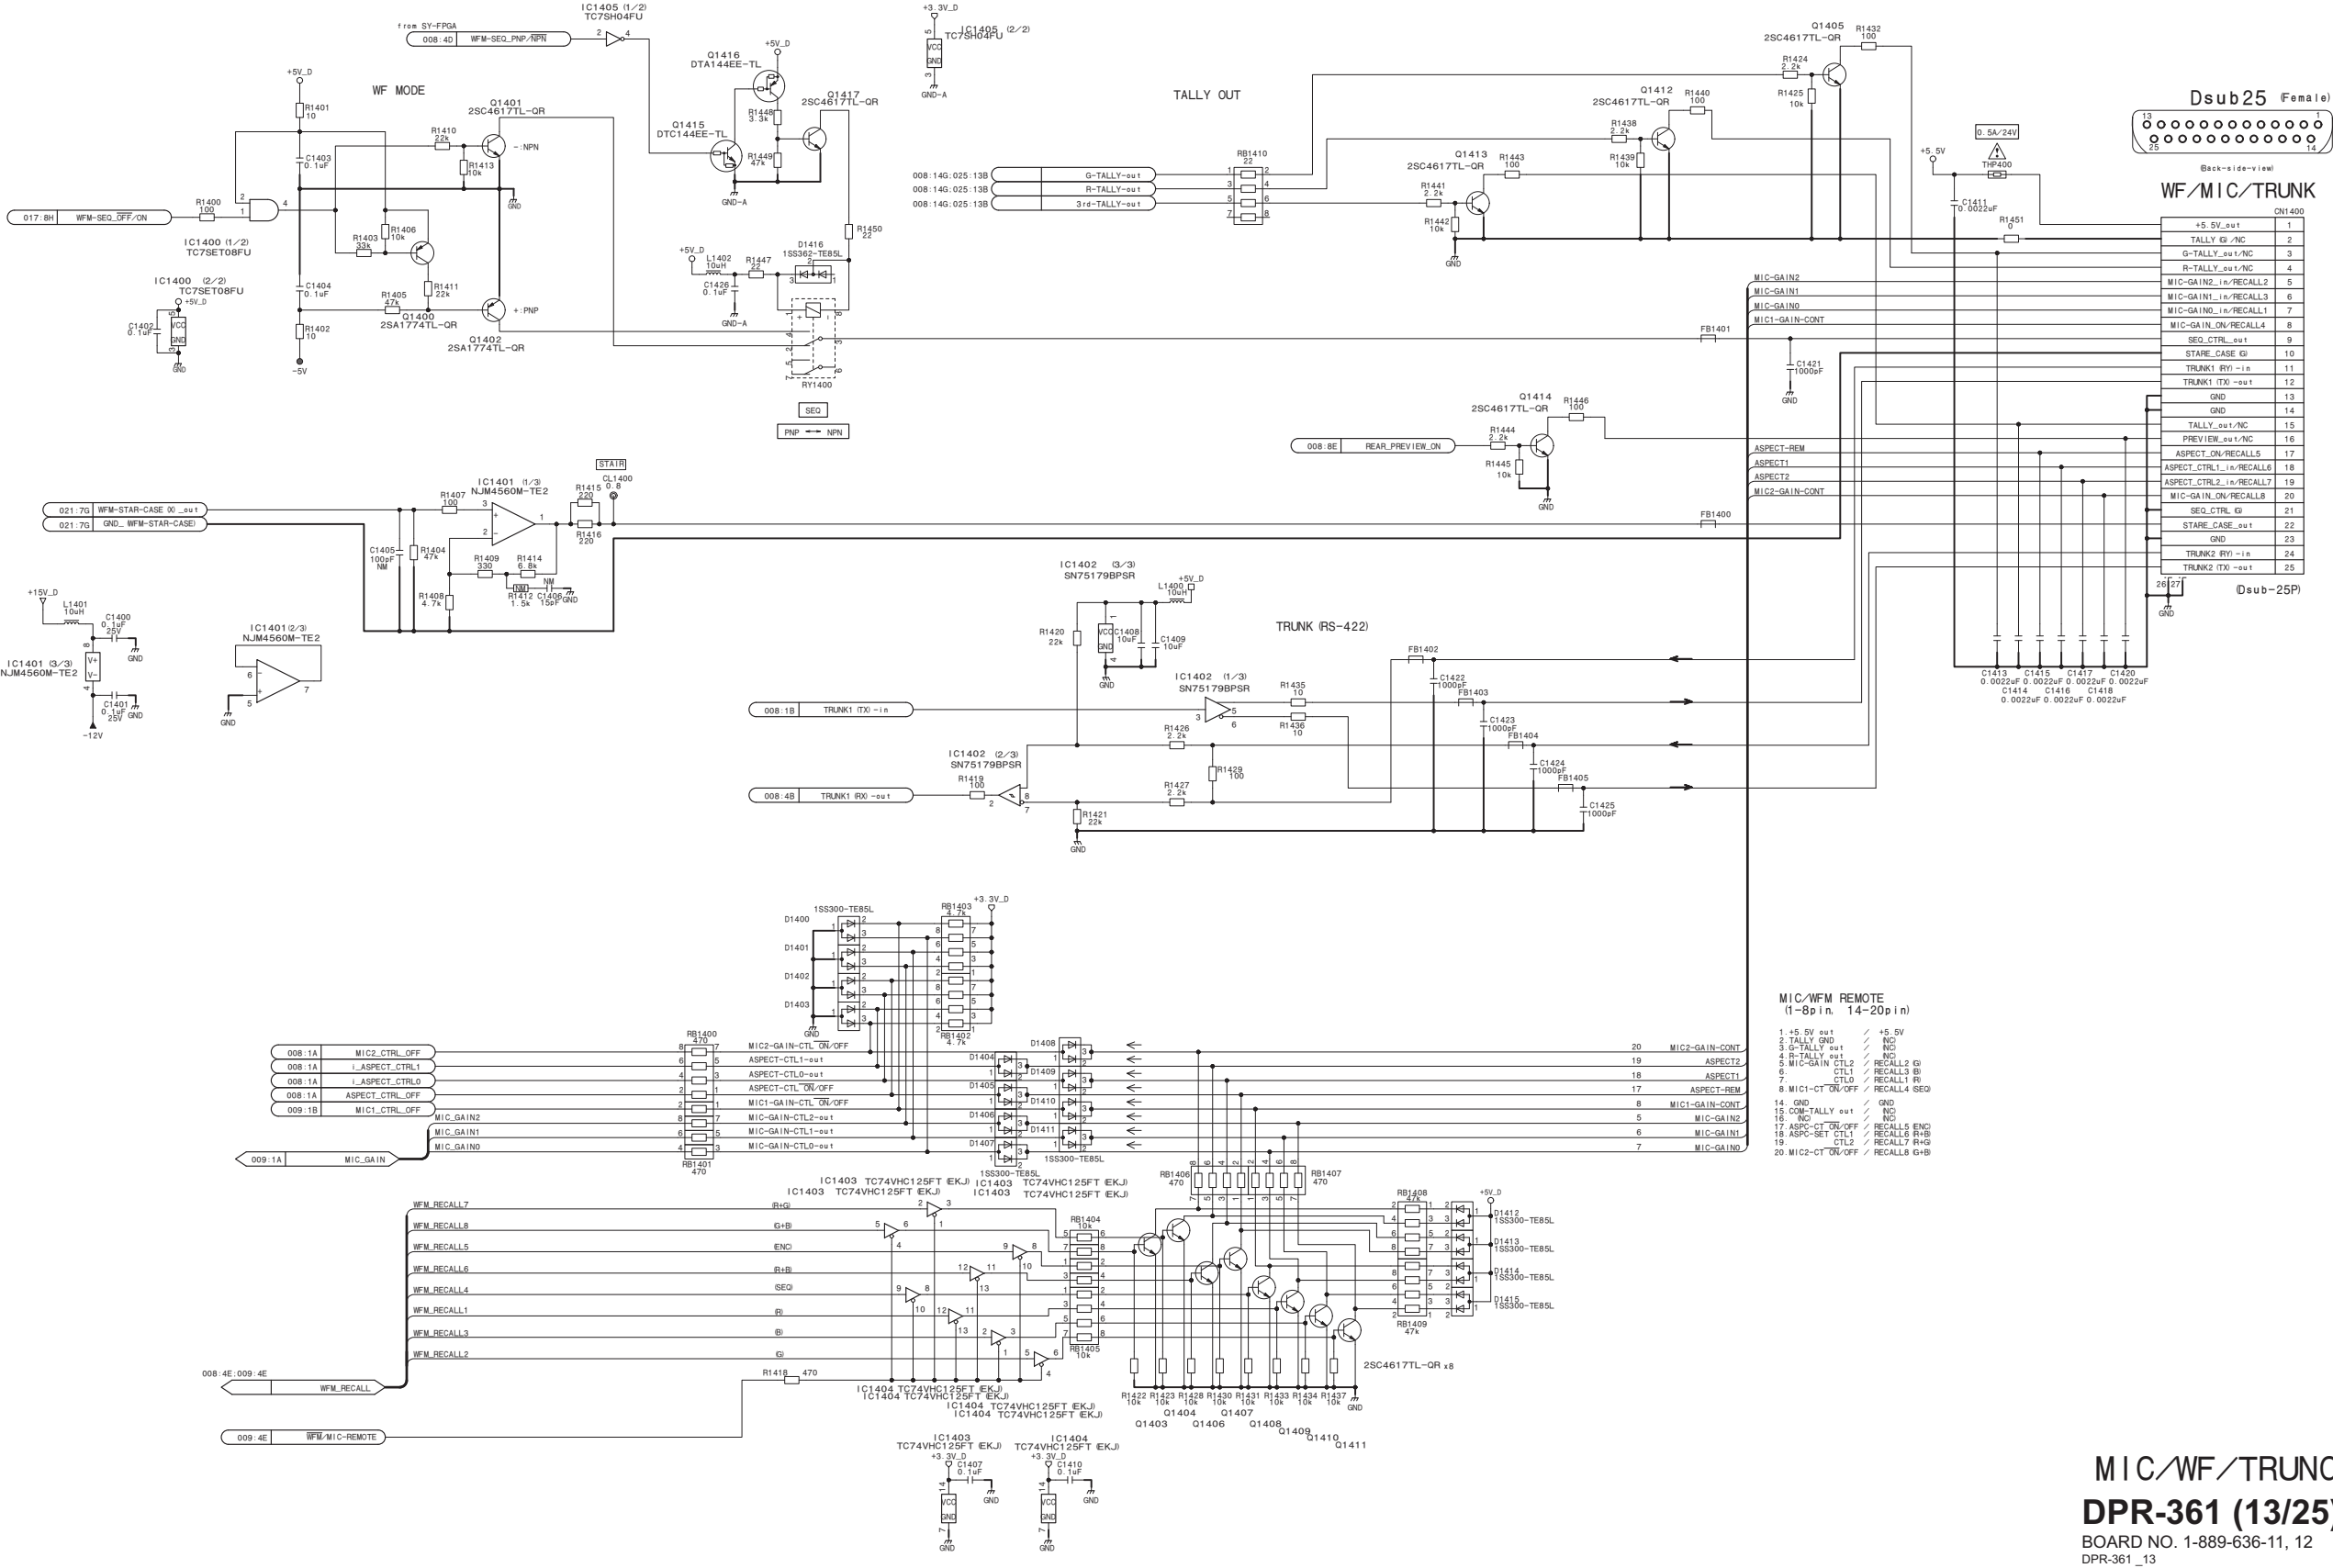


MIC/WF/TRUNC
DPR-361 (13/25)
BOARD NO. 1-889-636-11, 12
DPR-361_13

DPR-361 (14/25)

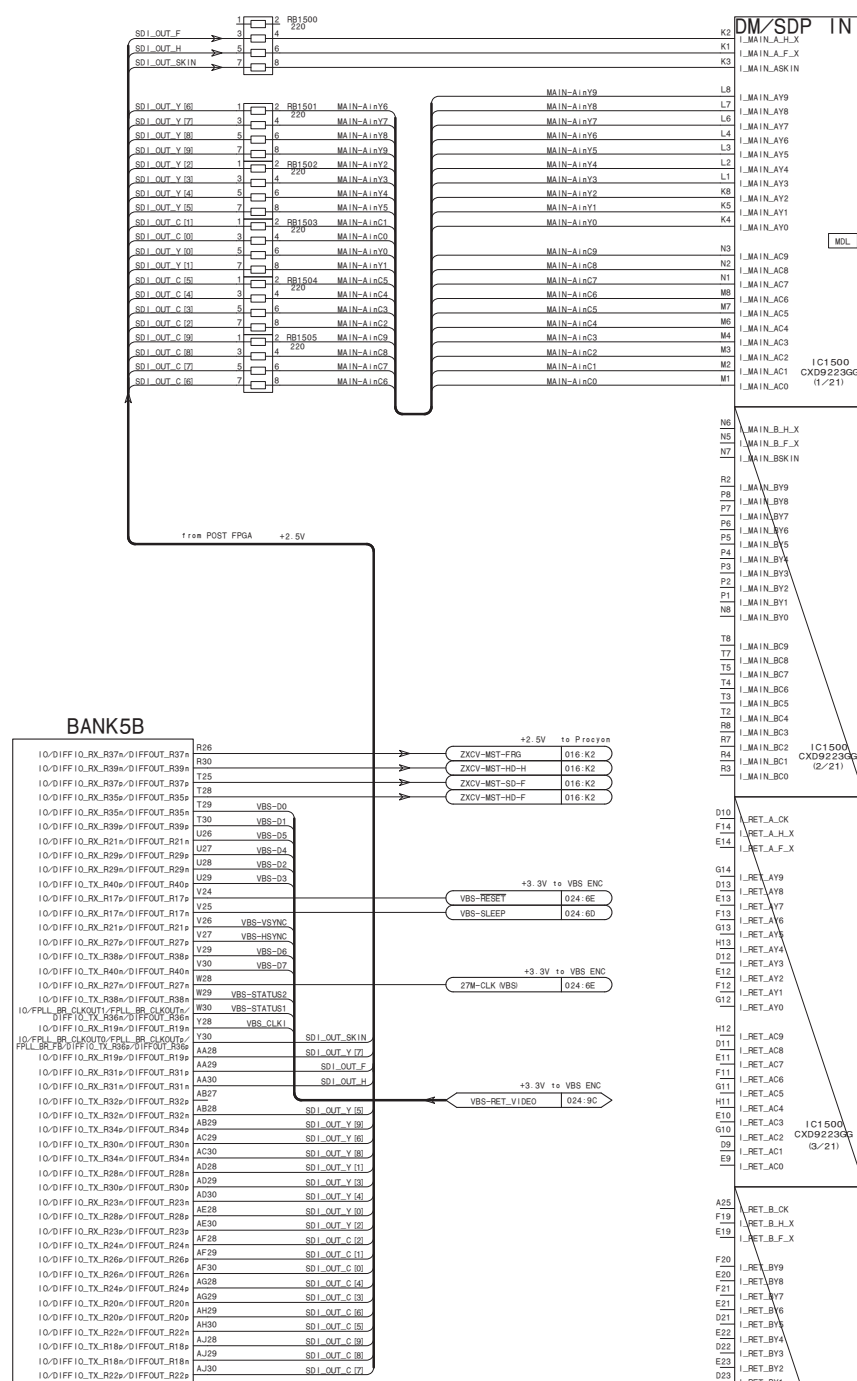


5CGXFC7D6F31C6N
IC2000
<POST-FPGA>+2.5V

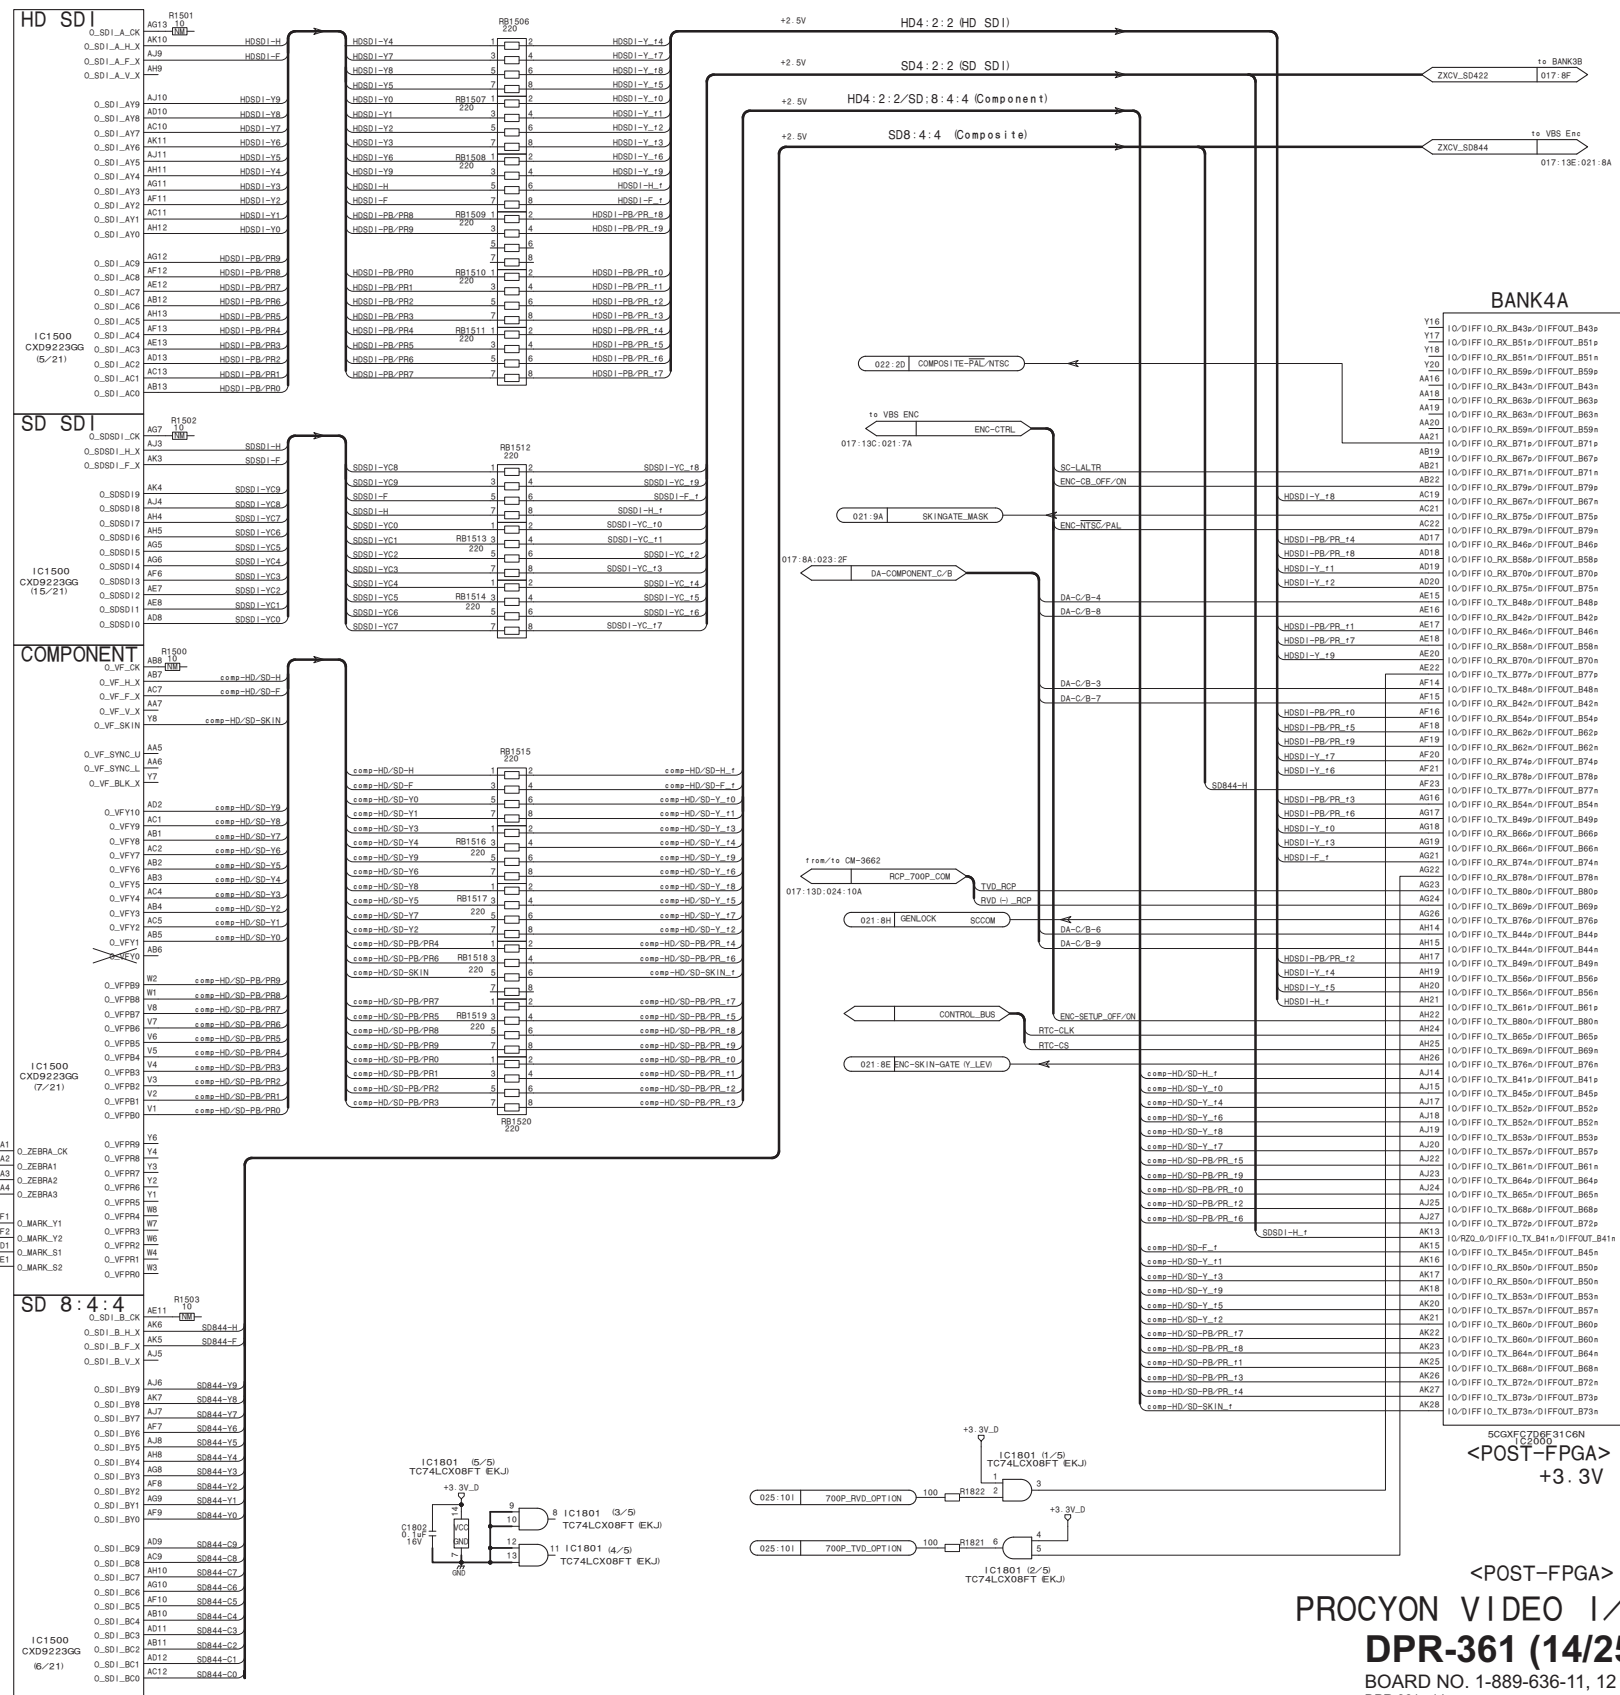


<POST-FPGA>
+3.3V


<POST-FPGA>
 PROCYON VIDEO I/O
DPR-361 (14/25)
 BOARD NO. 1-889-636-11, 12
 DPR-361_14

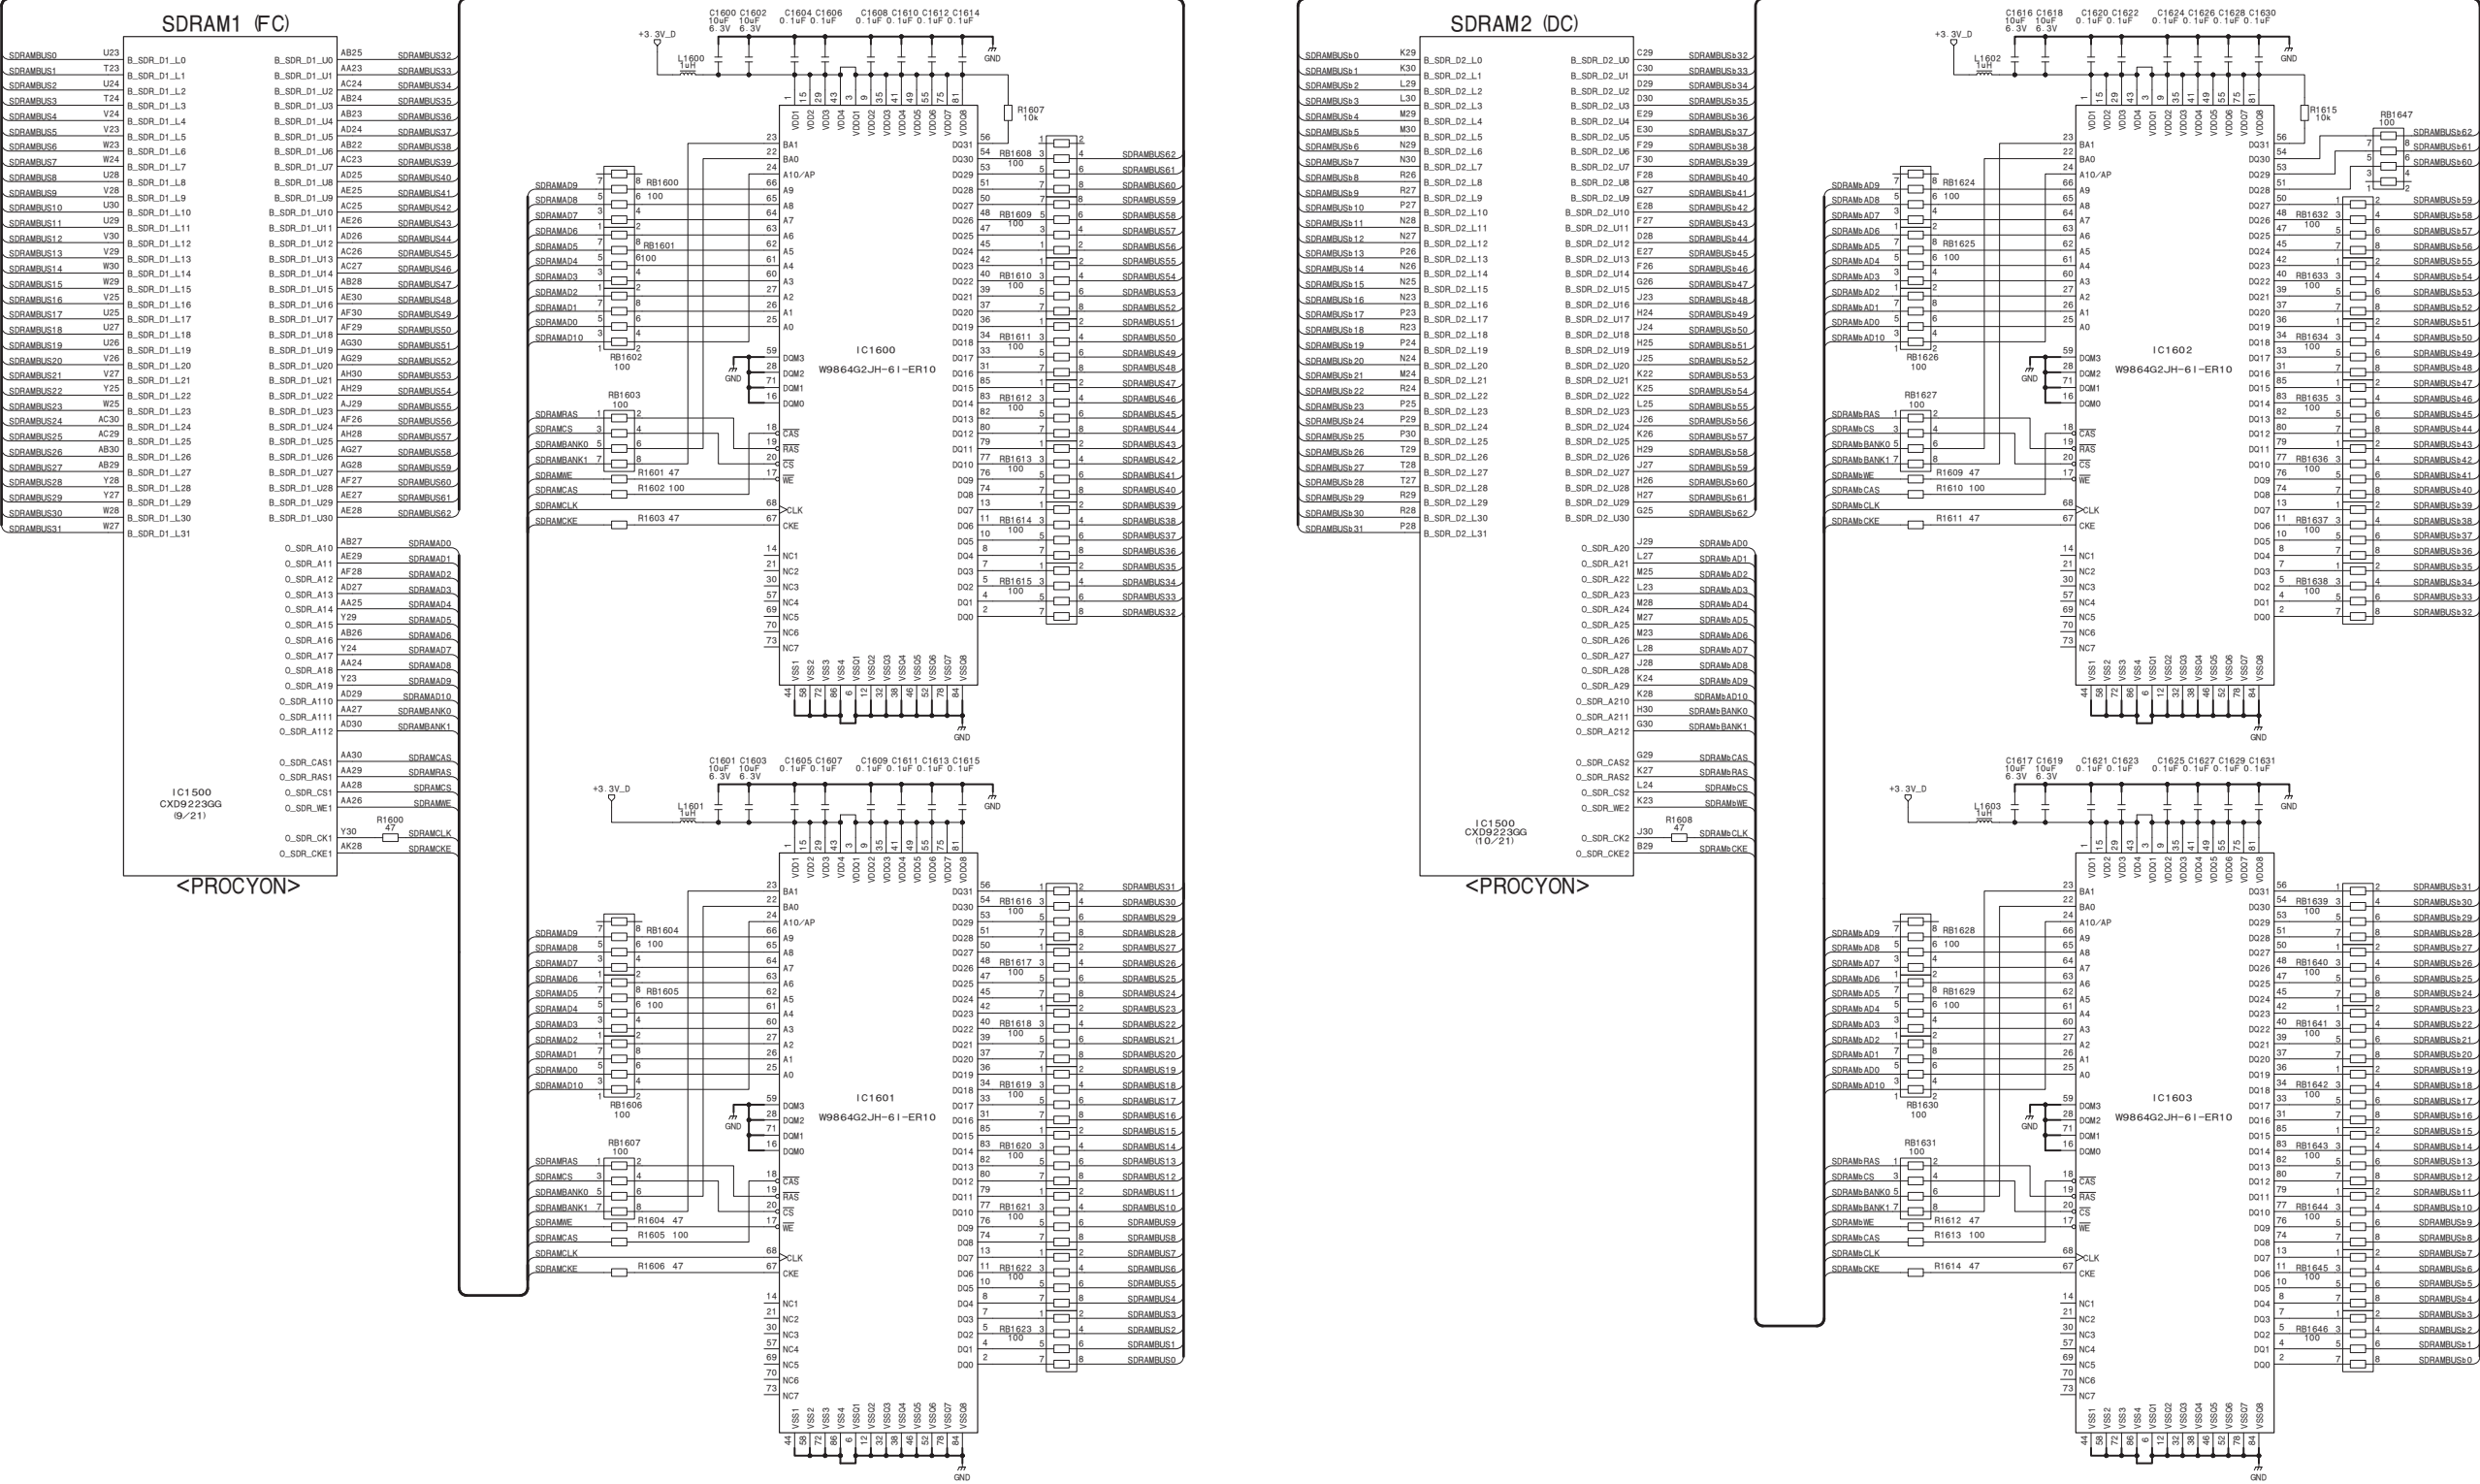


DPR-361 (17/25)

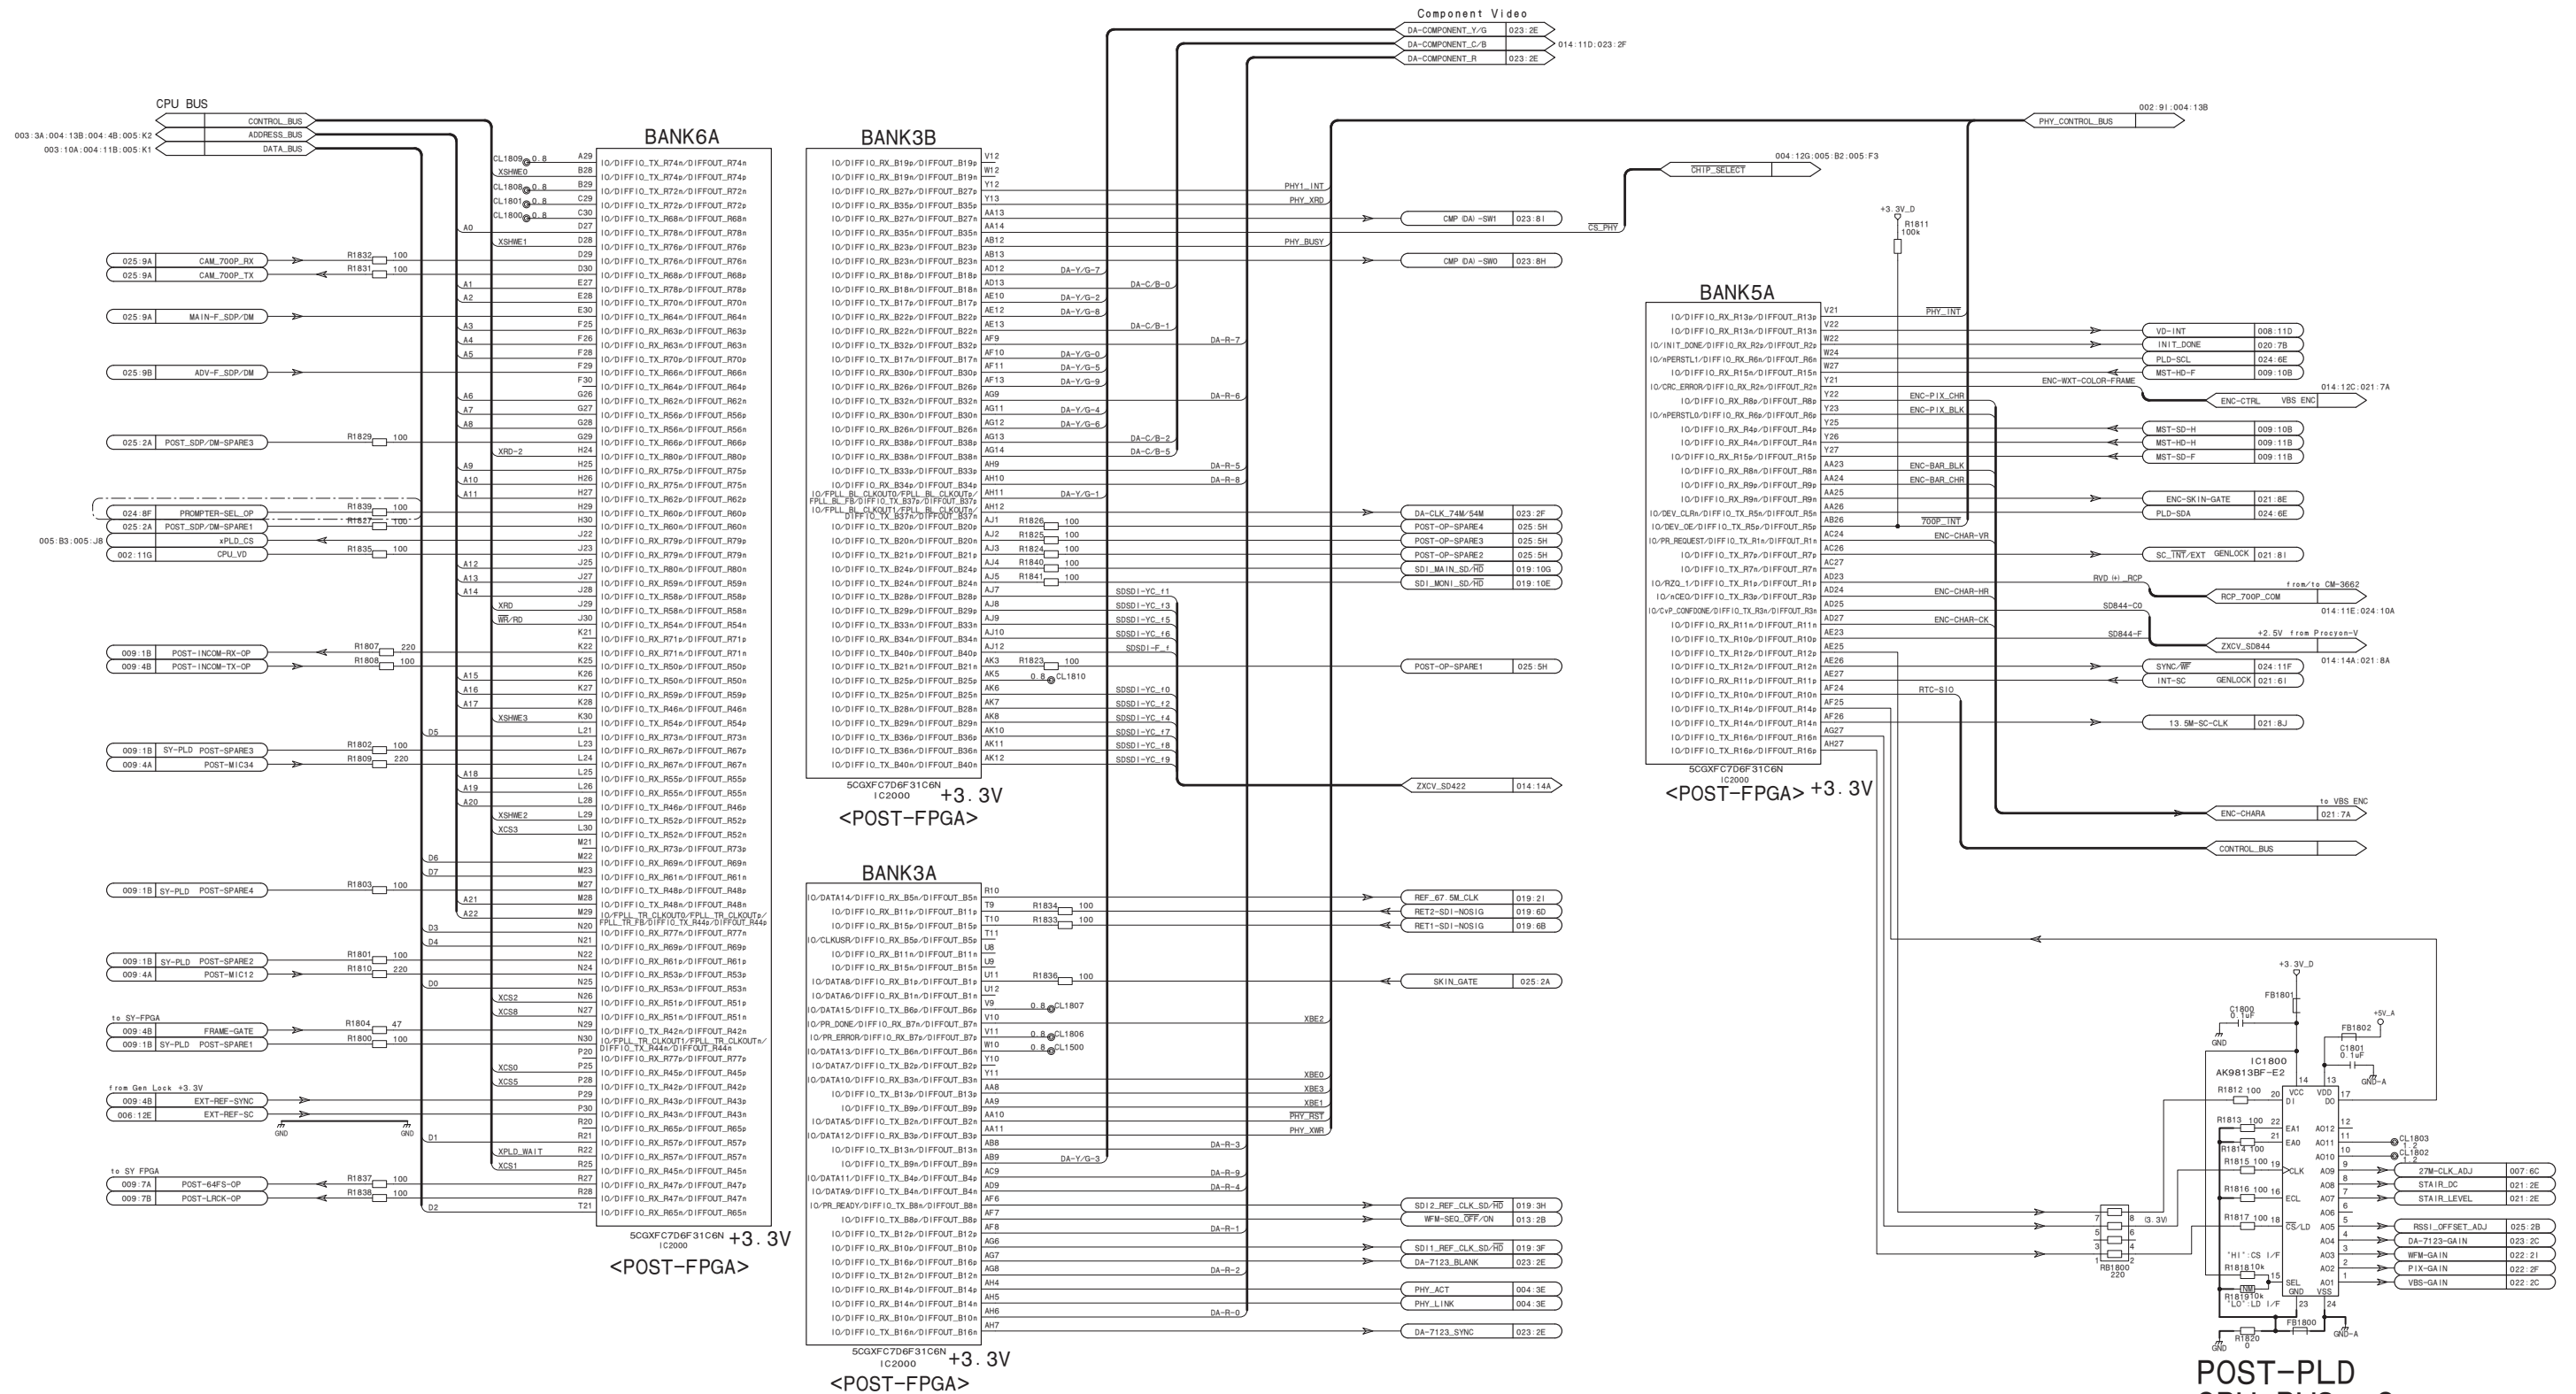

POST-PLD
CPU BUS, Component
DPR-361 (17/25)
BOARD NO. 1-889-636-11, 12
DPR-361 _17

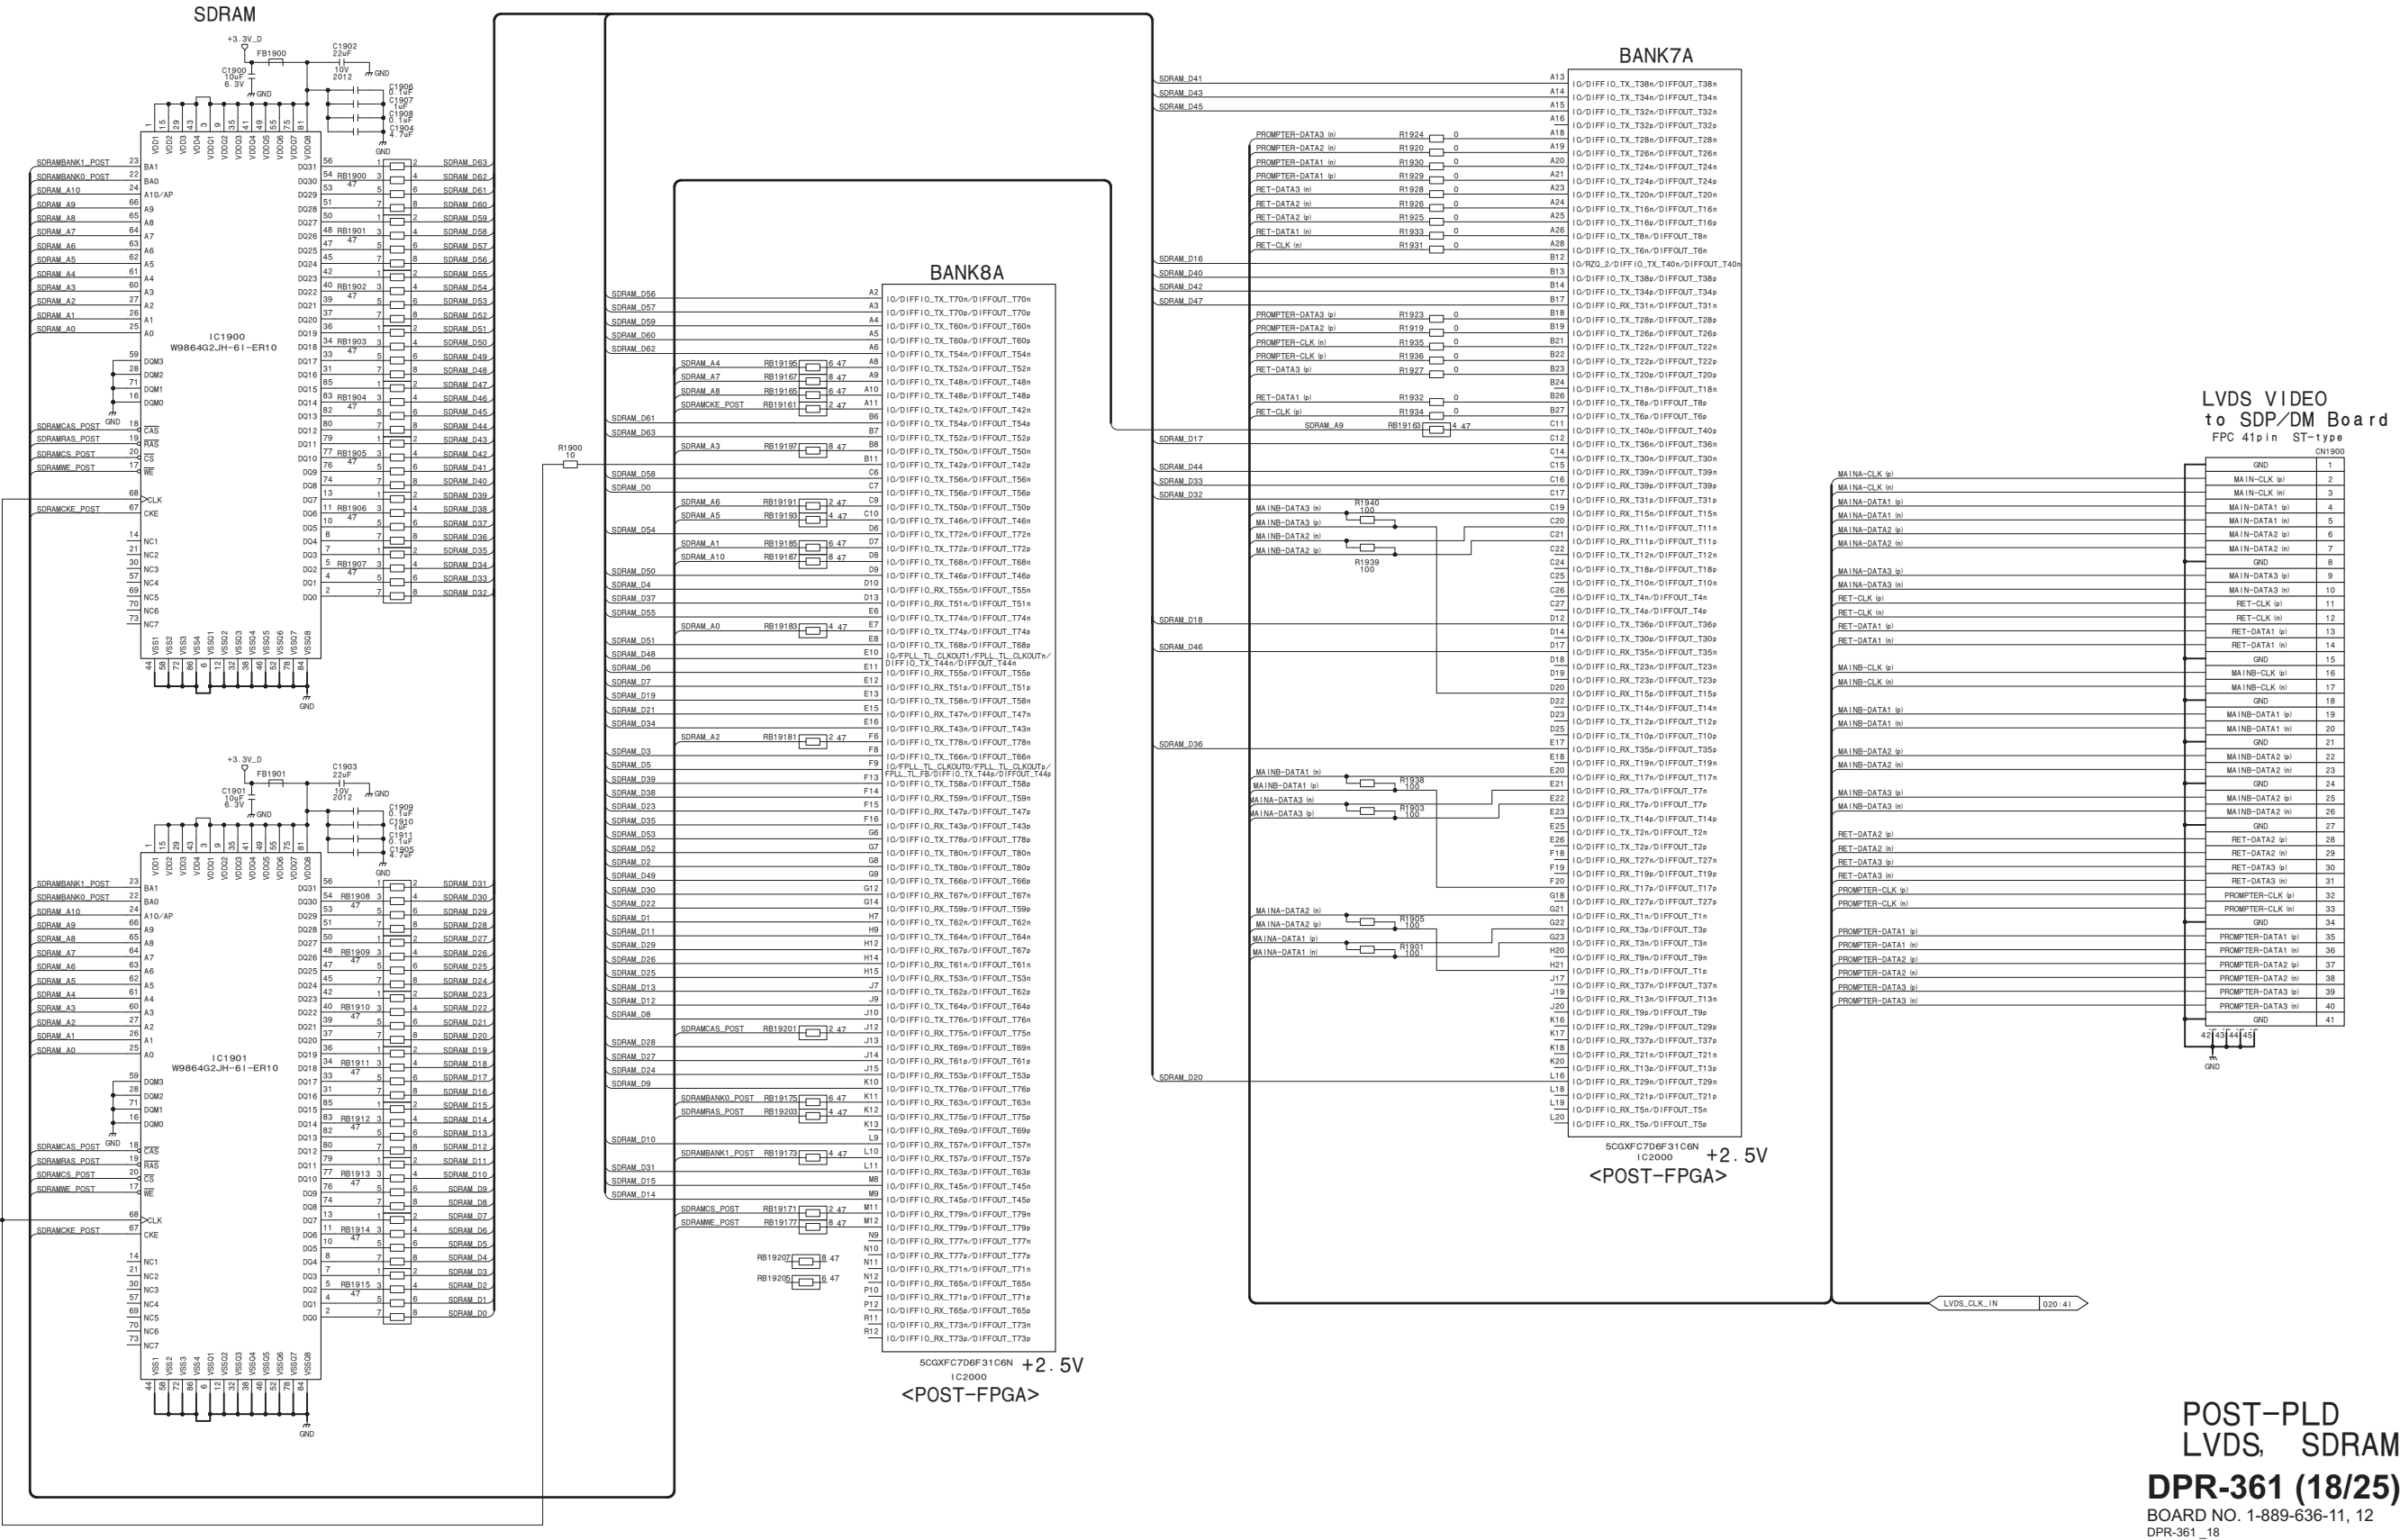


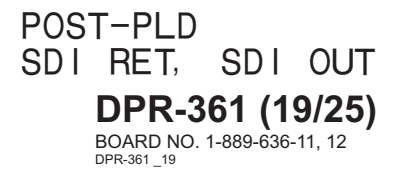


HSCU300RF/HSCU300R






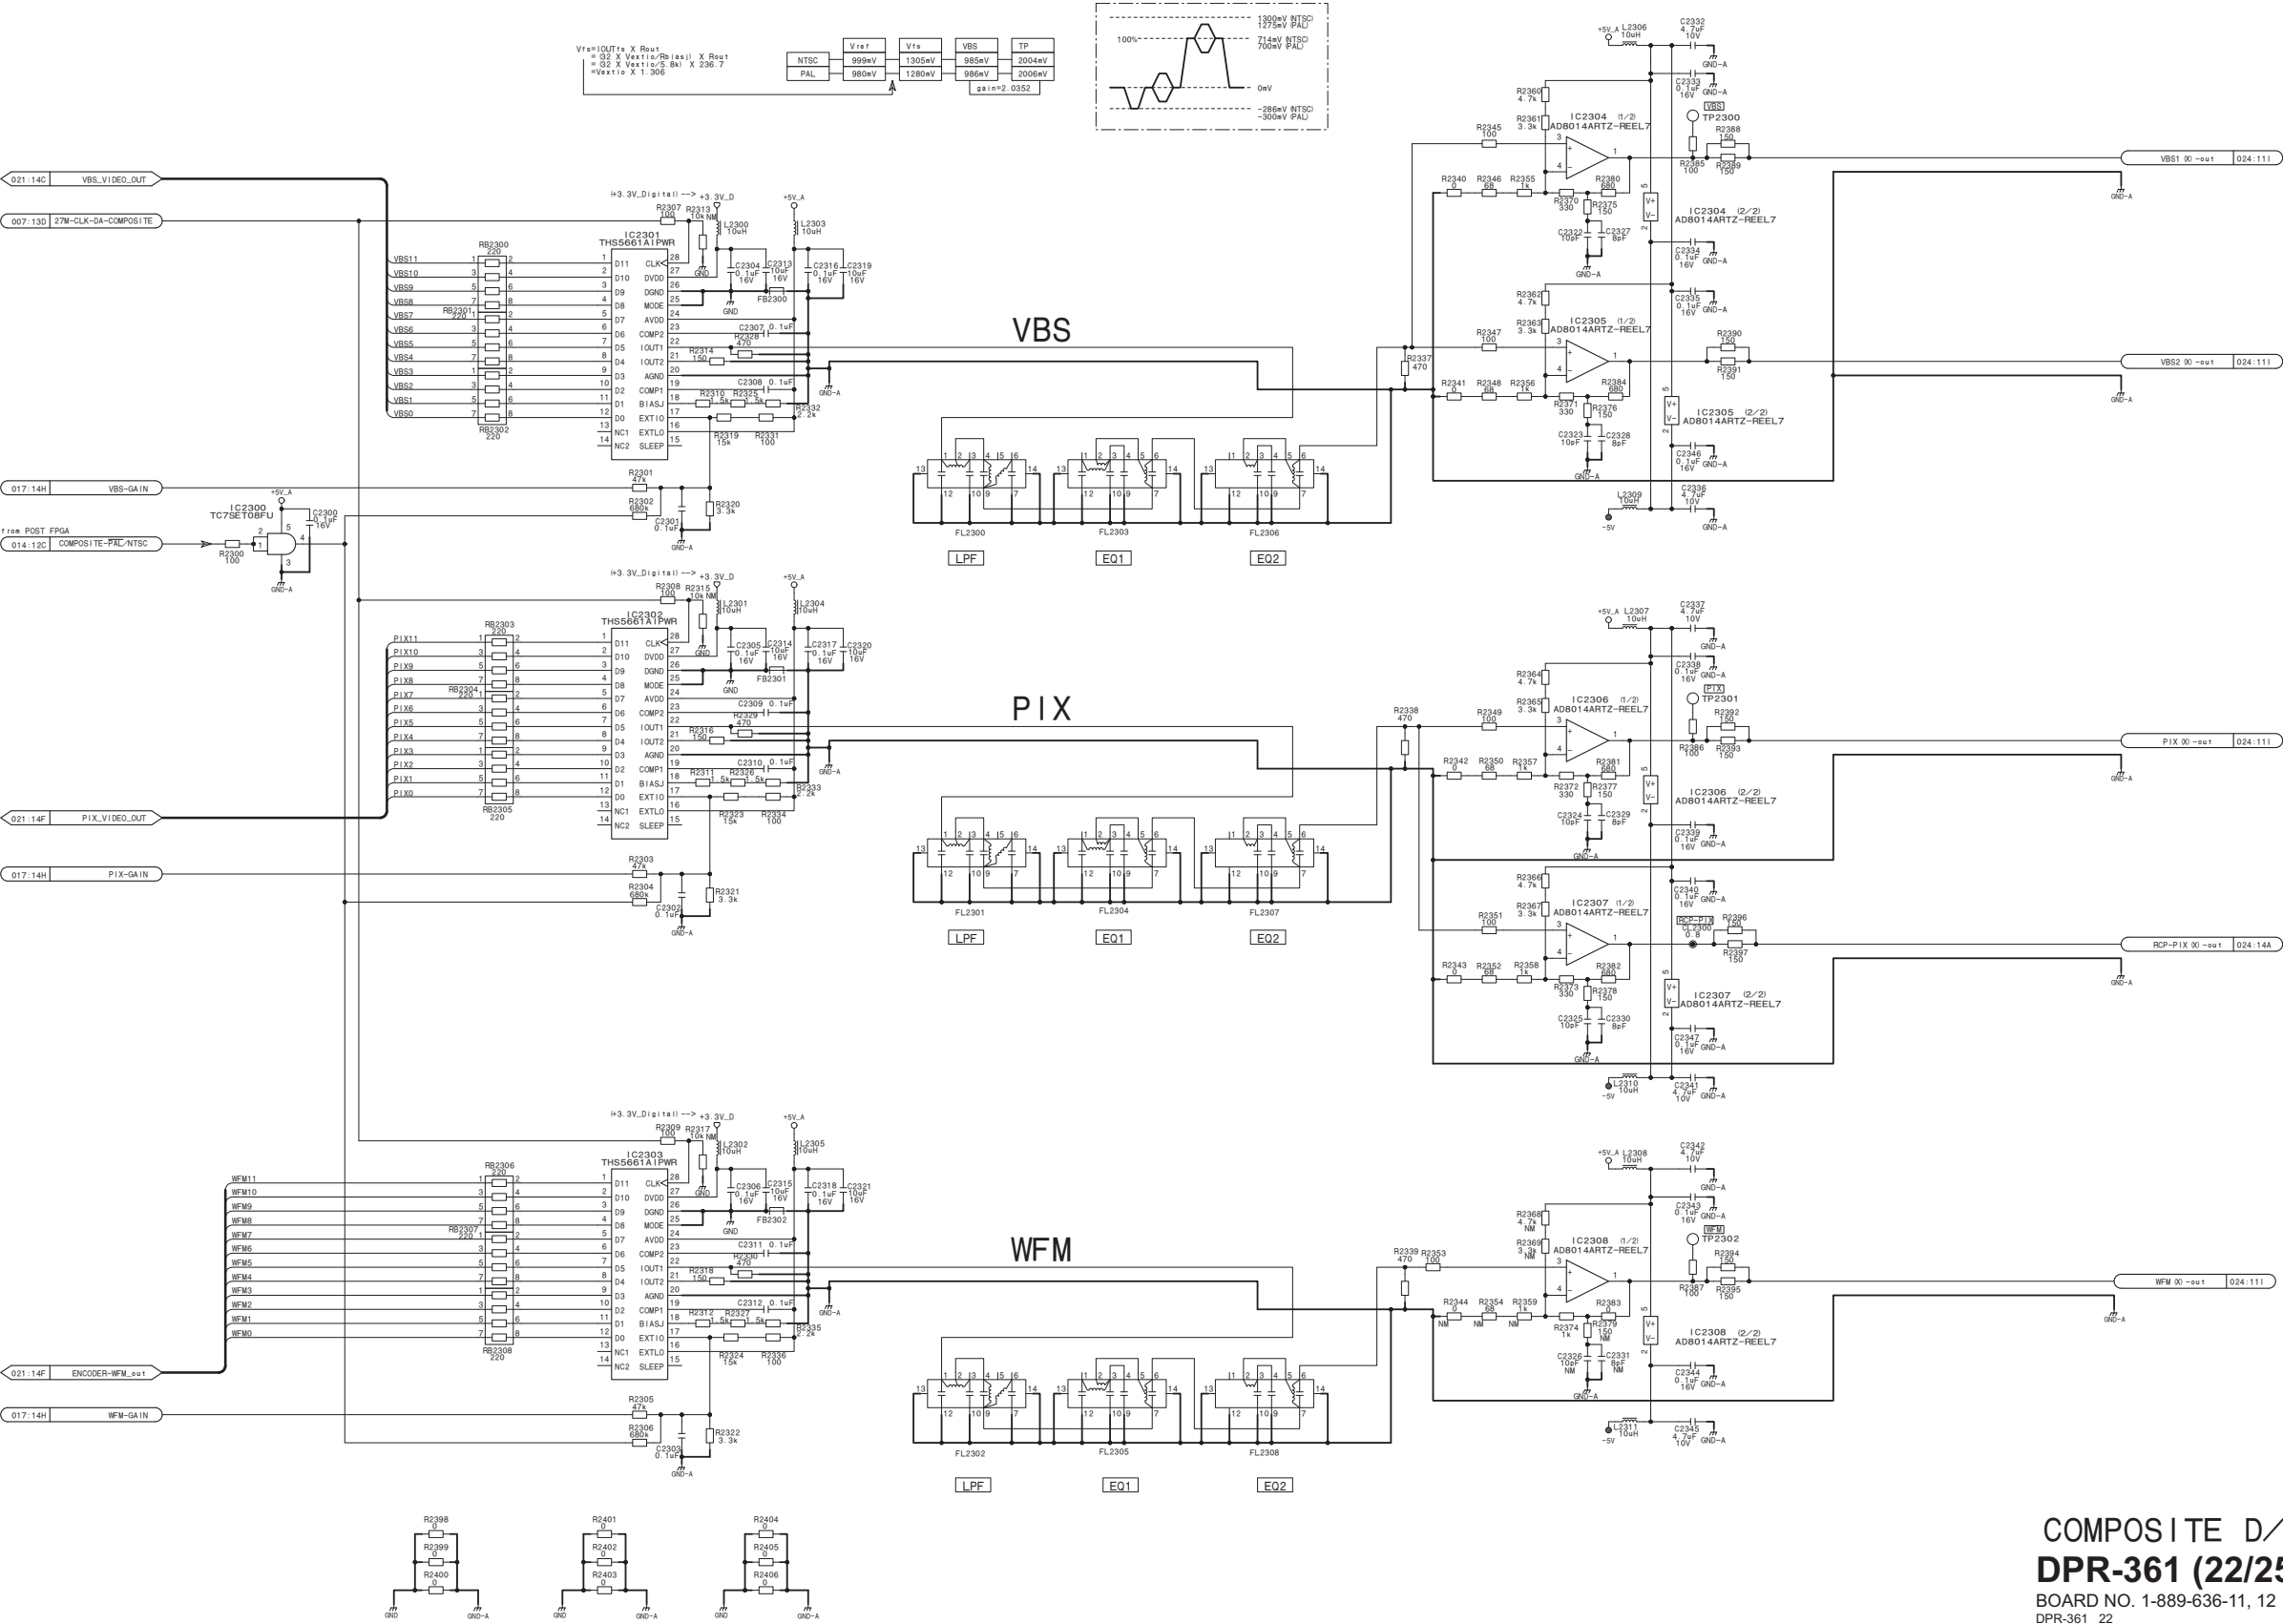


COMPOSITE D/A
DPR-361 (22/25)
BOARD NO. 1-889-636-11, 12
DPR-361_22





DPR-361 (24/25)

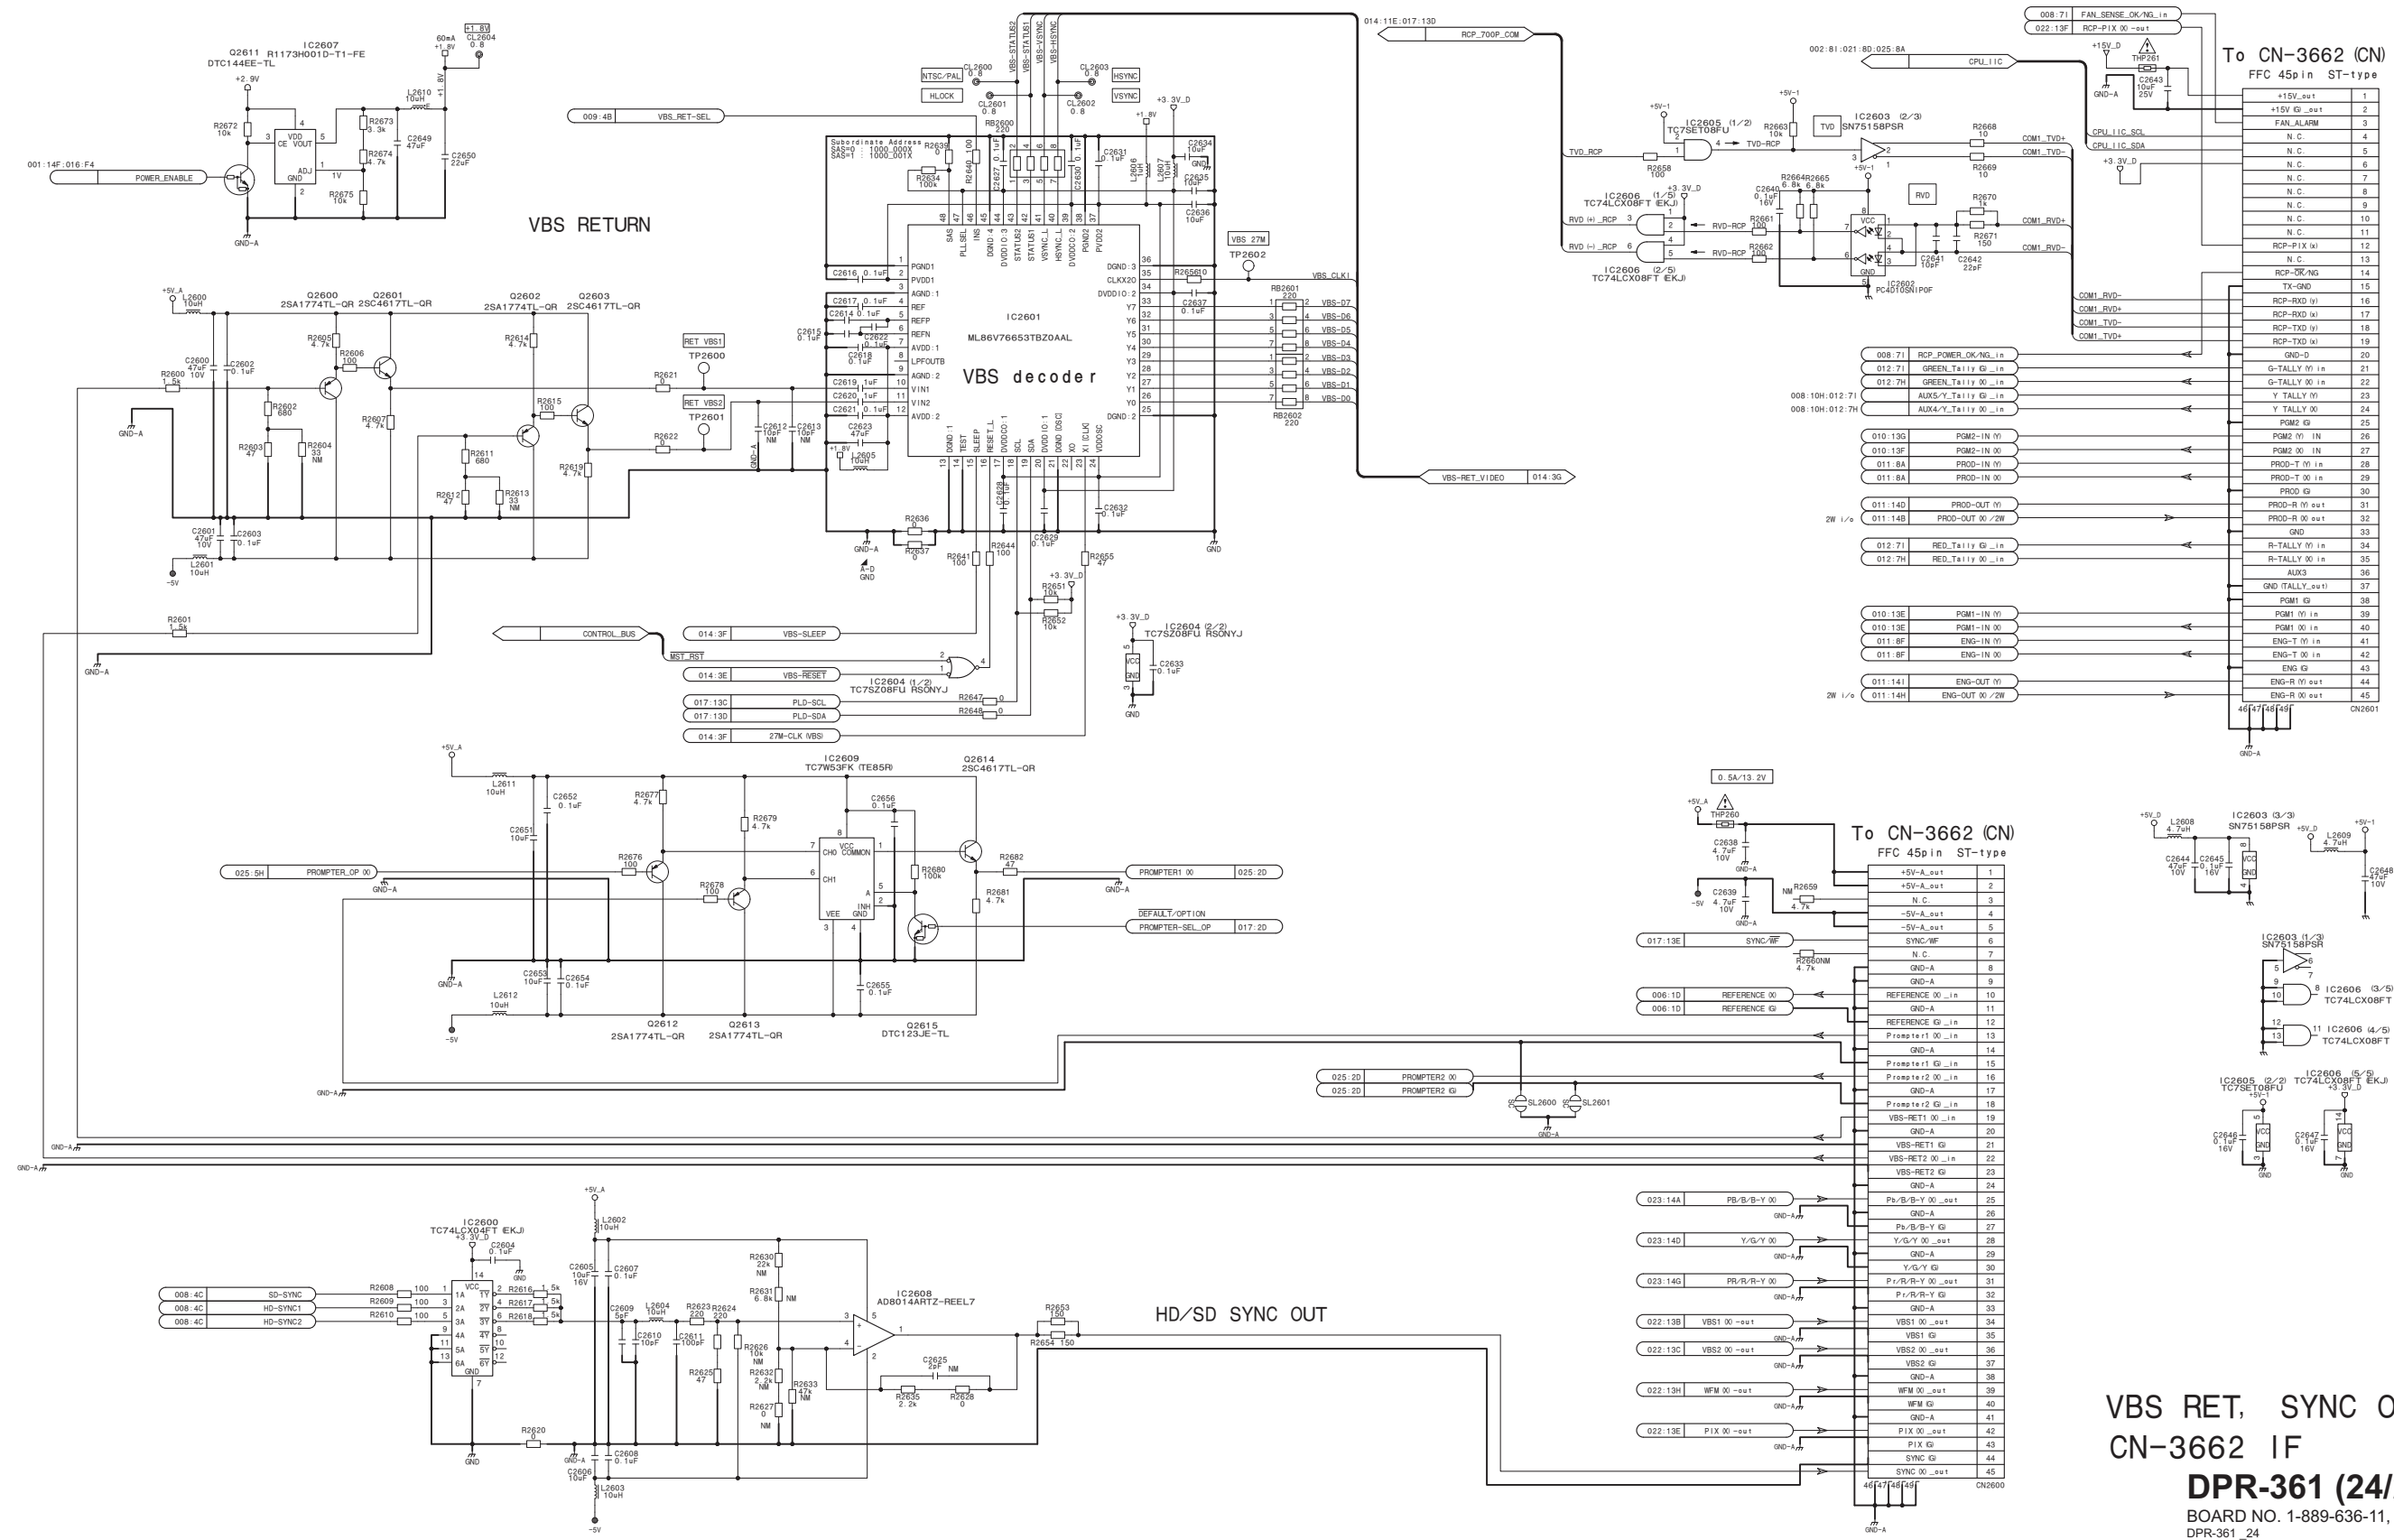


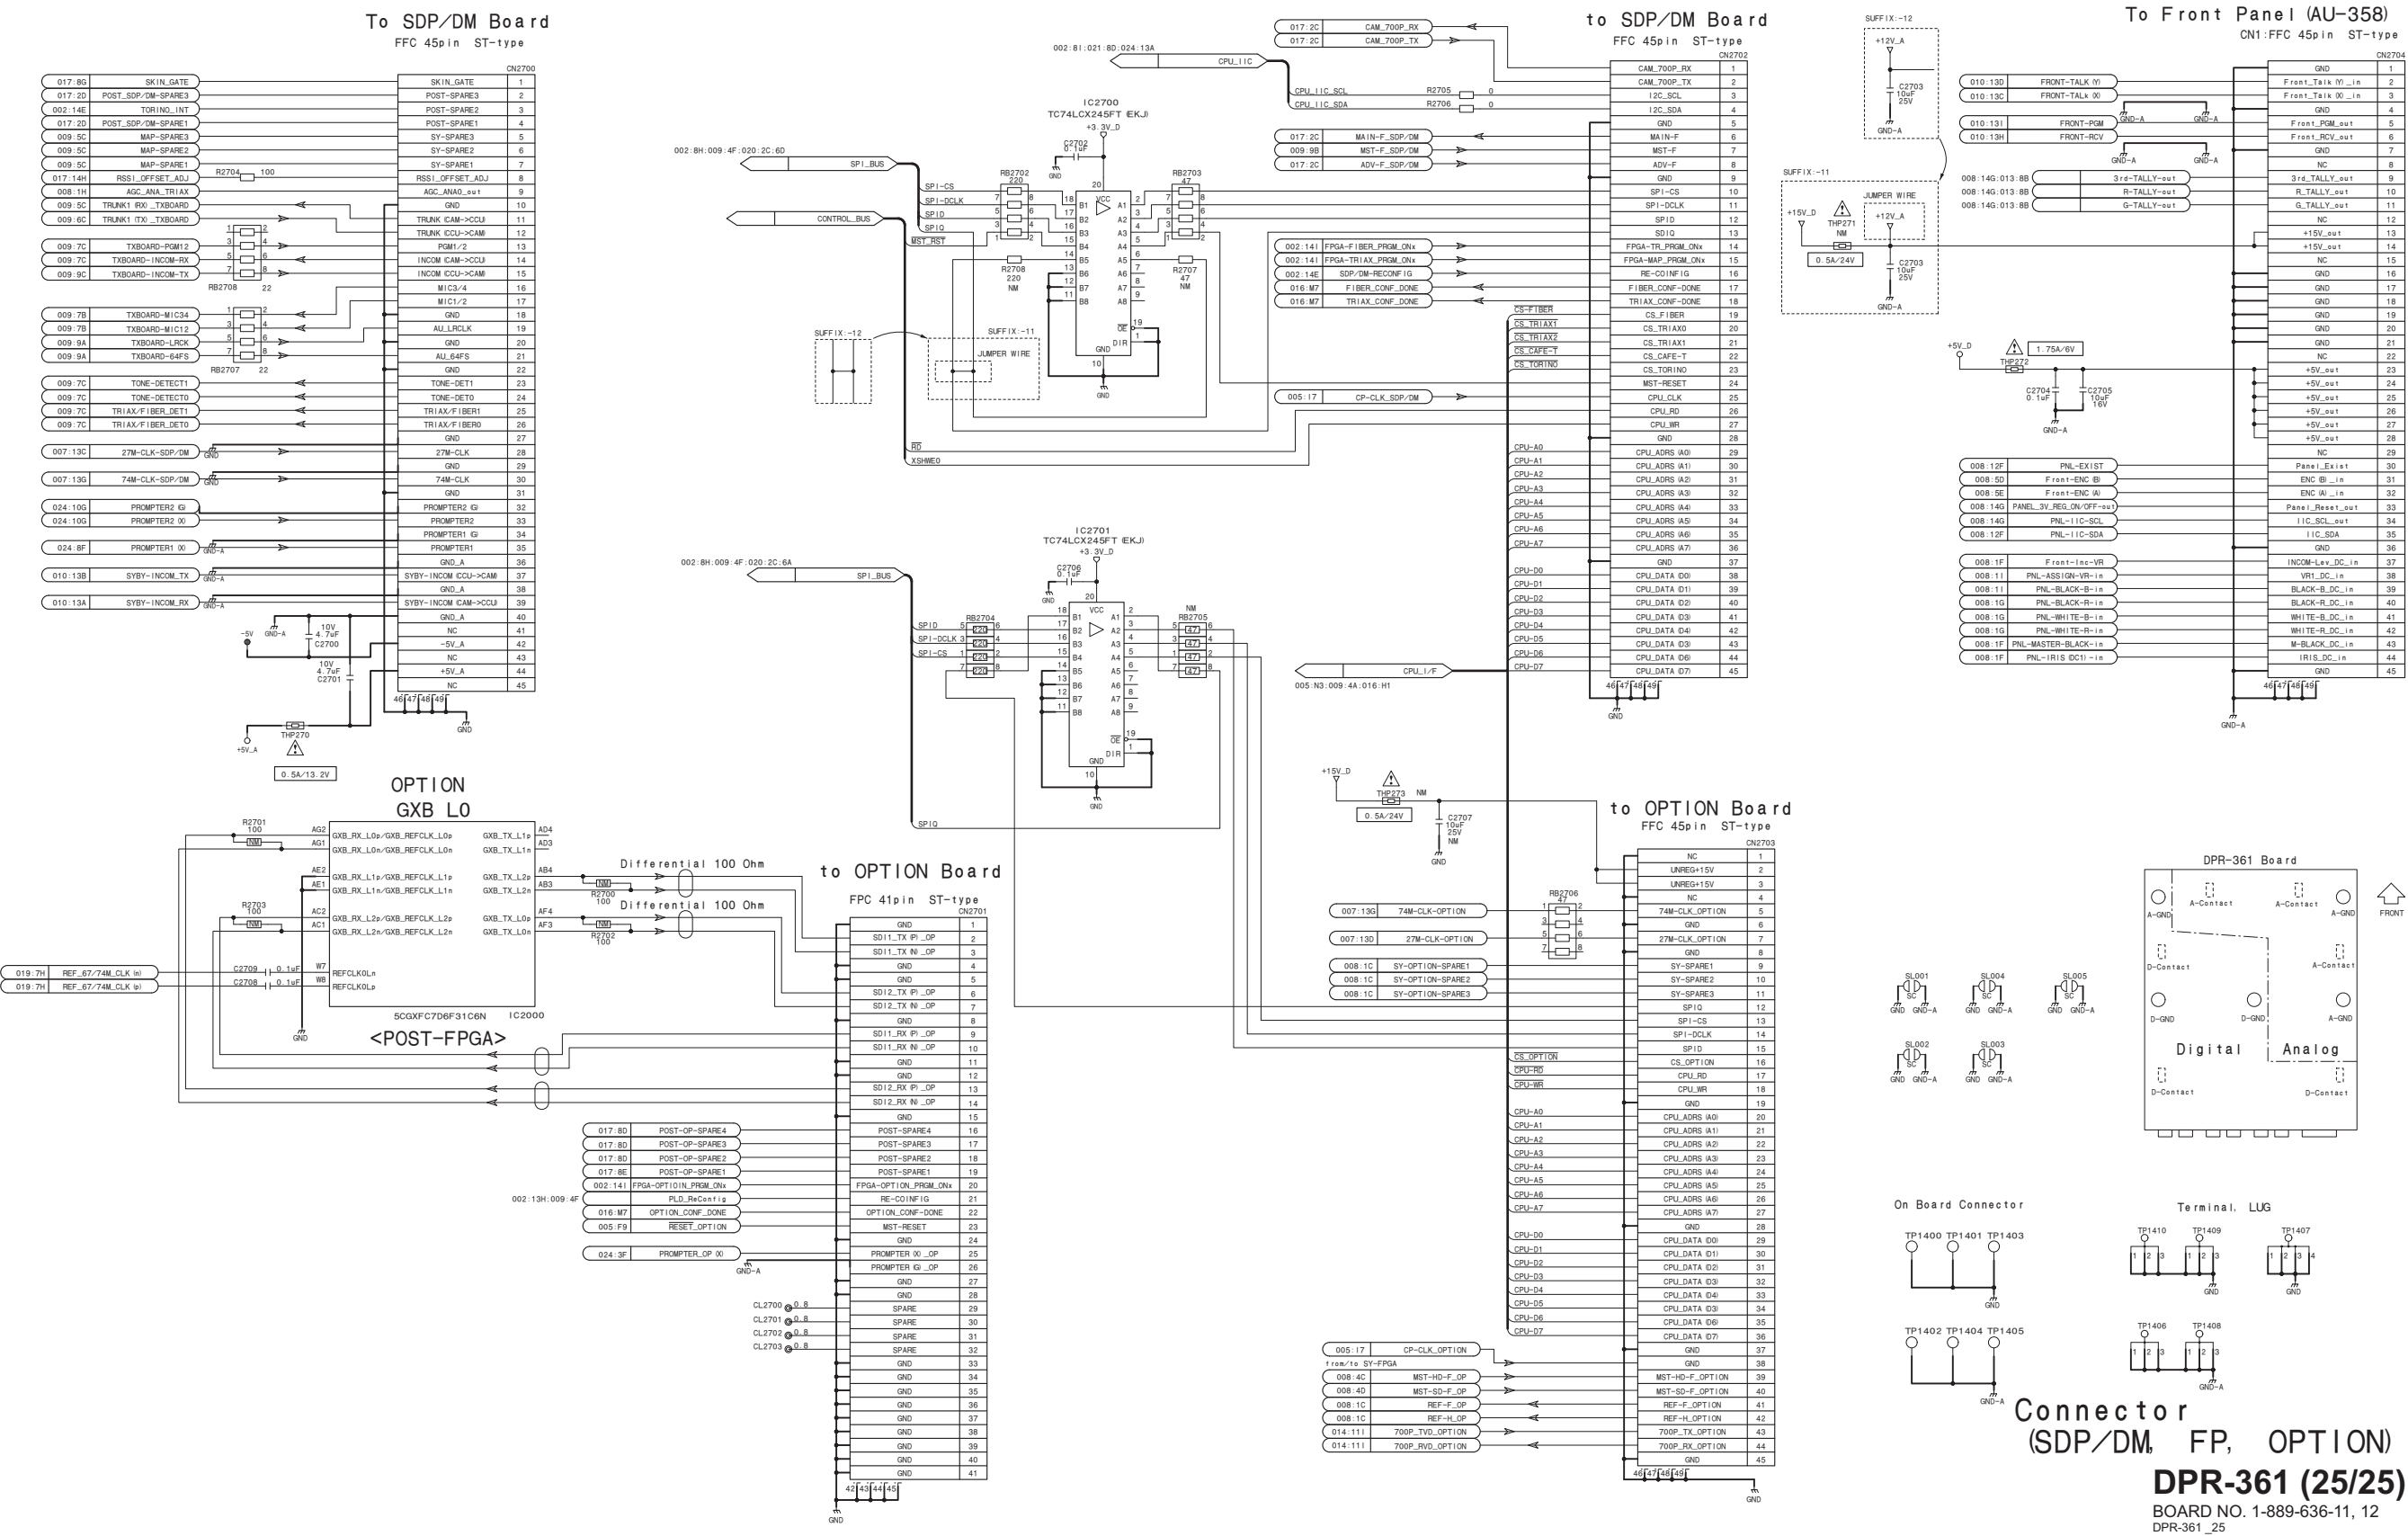


ENC-112
ENC-112_L

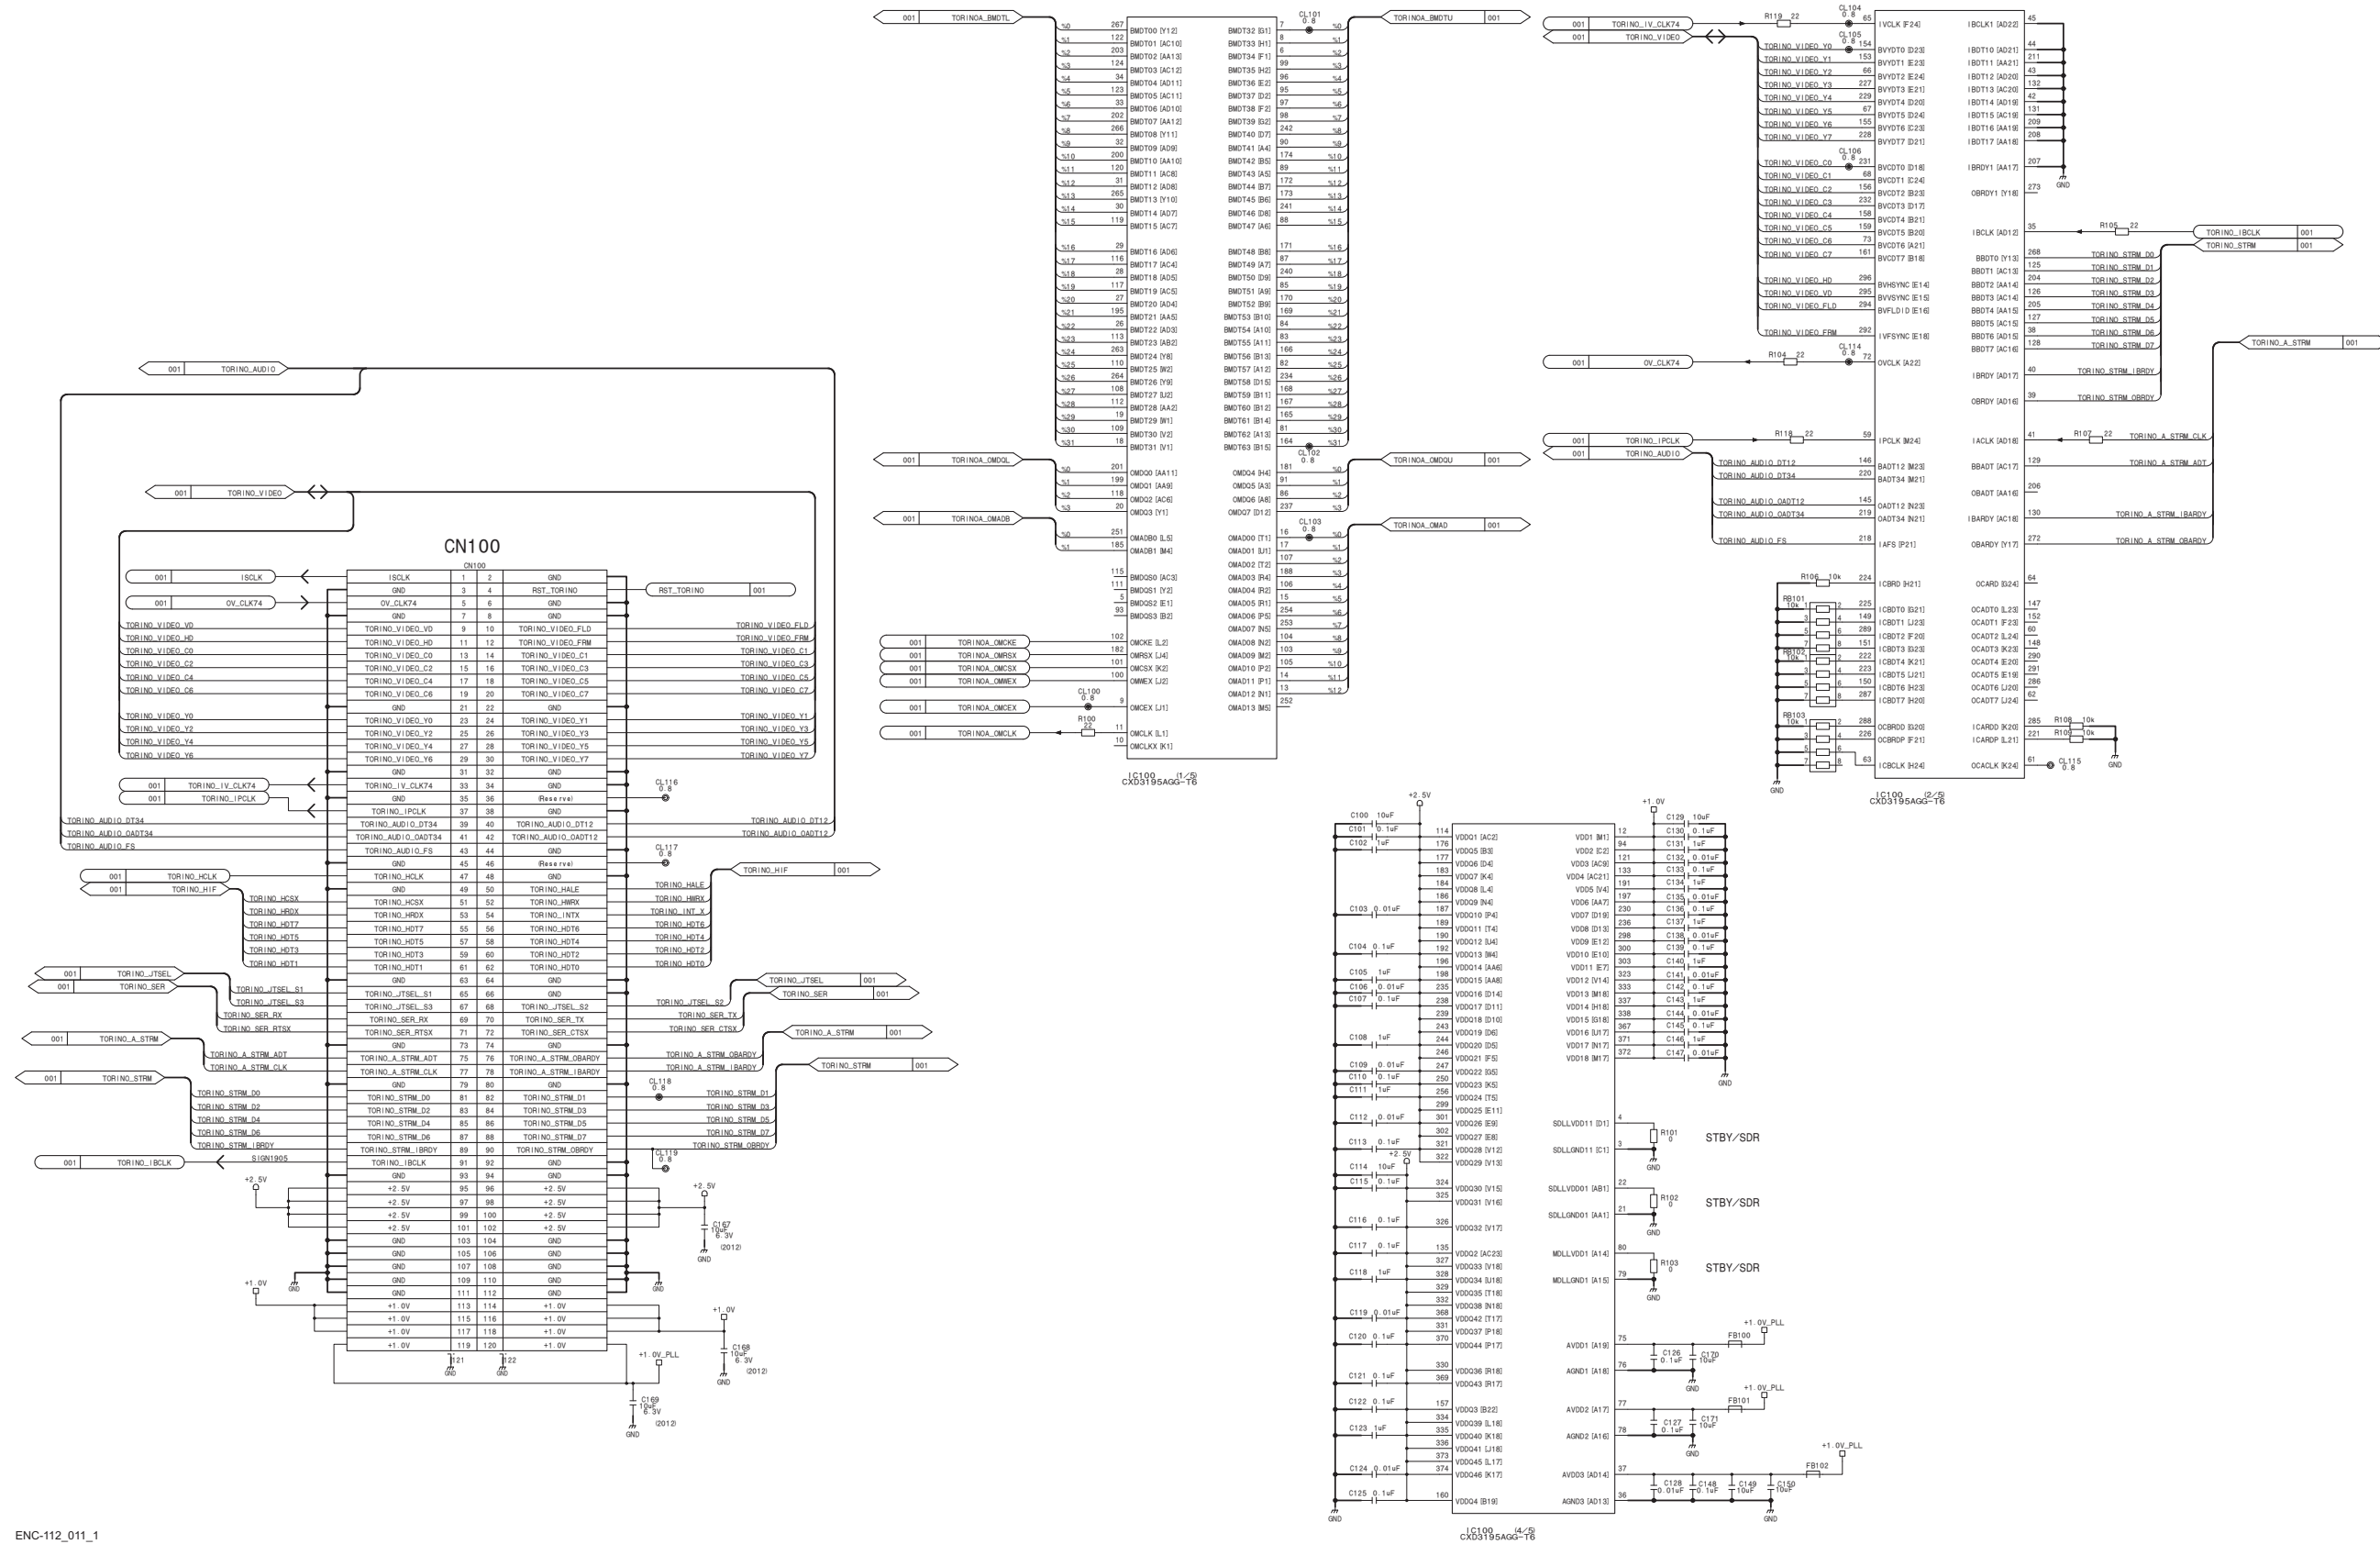

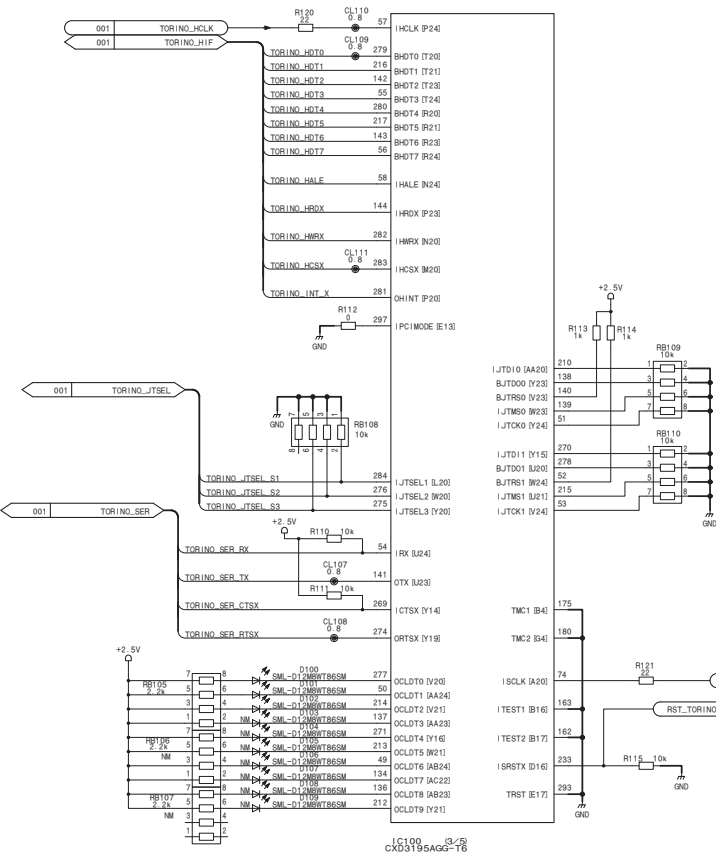


1	GN01 (A1)	GN02 (V10)	319
2	GN02 (B1)	GN03 (V11)	320
3	GN03 (A1)	GN04 (B1)	321
4	GN04 (A1)	GN05 (B1)	322
5	GN05 (A1)	GN06 (B1)	323
6	GN06 (A1)	GN07 (B1)	324
7	GN07 (A1)	GN08 (B1)	325
8	GN08 (A1)	GN09 (B1)	326
9	GN09 (A1)	GN10 (B1)	327
10	GN10 (A1)	GN11 (B1)	328
11	GN11 (A1)	GN12 (B1)	329
12	GN12 (A1)	GN13 (B1)	330
13	GN13 (A1)	GN14 (B1)	331
14	GN14 (A1)	GN15 (B1)	332
15	GN15 (A1)	GN16 (B1)	333
16	GN16 (A1)	GN17 (B1)	334
17	GN17 (A1)	GN18 (B1)	335
18	GN18 (A1)	GN19 (B1)	336
19	GN19 (A1)	GN20 (B1)	337
20	GN20 (A1)	GN21 (B1)	338
21	GN21 (A1)	GN22 (B1)	339
22	GN22 (A1)	GN23 (B1)	340
23	GN23 (A1)	GN24 (B1)	341
24	GN24 (A1)	GN25 (B1)	342
25	GN25 (A1)	GN26 (B1)	343
26	GN26 (A1)	GN27 (B1)	344
27	GN27 (A1)	GN28 (B1)	345
28	GN28 (A1)	GN29 (B1)	346
29	GN29 (A1)	GN30 (B1)	347
30	GN30 (A1)	GN31 (B1)	348
31	GN31 (A1)	GN32 (B1)	349
32	GN32 (A1)	GN33 (B1)	350
33	GN33 (A1)	GN34 (B1)	351
34	GN34 (A1)	GN35 (B1)	352
35	GN35 (A1)	GN36 (B1)	353
36	GN36 (A1)	GN37 (B1)	354
37	GN37 (A1)	GN38 (B1)	355
38	GN38 (A1)	GN39 (B1)	356
39	GN39 (A1)	GN40 (B1)	357
40	GN40 (A1)	GN41 (B1)	358
41	GN41 (A1)	GN42 (B1)	359
42	GN42 (A1)	GN43 (B1)	360
43	GN43 (A1)	GN44 (B1)	361
44	GN44 (A1)	GN45 (B1)	362
45	GN45 (A1)	GN46 (B1)	363
46	GN46 (A1)	GN47 (B1)	364
47	GN47 (A1)	GN48 (B1)	365
48	GN48 (A1)	GN49 (B1)	366
49	GN49 (A1)	GN50 (B1)	367
50	GN50 (A1)	GN51 (B1)	368
51	GN51 (A1)	GN52 (B1)	369
52	GN52 (A1)	GN53 (B1)	370
53	GN53 (A1)	GN54 (B1)	371
54	GN54 (A1)	GN55 (B1)	372
55	GN55 (A1)	GN56 (B1)	373
56	GN56 (A1)	GN57 (B1)	374
57	GN57 (A1)	GN58 (B1)	375
58	GN58 (A1)	GN59 (B1)	376
59	GN59 (A1)	GN60 (B1)	377
60	GN60 (A1)	GN61 (B1)	378
61	GN61 (A1)	GN62 (B1)	379
62	GN62 (A1)	GN63 (B1)	380
63	GN63 (A1)	GN64 (B1)	381
64	GN64 (A1)	GN65 (B1)	382
65	GN65 (A1)	GN66 (B1)	383
66	GN66 (A1)	GN67 (B1)	384
67	GN67 (A1)	GN68 (B1)	385
68	GN68 (A1)	GN69 (B1)	386
69	GN69 (A1)	GN70 (B1)	387
70	GN70 (A1)	GN71 (B1)	388
71	GN71 (A1)	GN72 (B1)	389
72	GN72 (A1)	GN73 (B1)	390
73	GN73 (A1)	GN74 (B1)	391
74	GN74 (A1)	GN75 (B1)	392
75	GN75 (A1)	GN76 (B1)	393
76	GN76 (A1)	GN77 (B1)	394
77	GN77 (A1)	GN78 (B1)	395
78	GN78 (A1)	GN79 (B1)	396
79	GN79 (A1)	GN80 (B1)	397
80	GN80 (A1)	GN81 (B1)	398
81	GN81 (A1)	GN82 (B1)	399
82	GN82 (A1)	GN83 (B1)	400
83	GN83 (A1)	GN84 (B1)	401
84	GN84 (A1)	GN85 (B1)	402
85	GN85 (A1)	GN86 (B1)	403
86	GN86 (A1)	GN87 (B1)	404
87	GN87 (A1)	GN88 (B1)	405
88	GN88 (A1)	GN89 (B1)	406
89	GN89 (A1)	GN90 (B1)	407
90	GN90 (A1)	GN91 (B1)	408
91	GN91 (A1)	GN92 (B1)	409
92	GN92 (A1)	GN93 (B1)	410
93	GN93 (A1)	GN94 (B1)	411
94	GN94 (A1)	GN95 (B1)	412
95	GN95 (A1)	GN96 (B1)	413
96	GN96 (A1)	GN97 (B1)	414
97	GN97 (A1)	GN98 (B1)	415
98	GN98 (A1)	GN99 (B1)	416
99	GN99 (A1)	GN100 (B1)	417
100	GN100 (A1)	GN101 (B1)	418

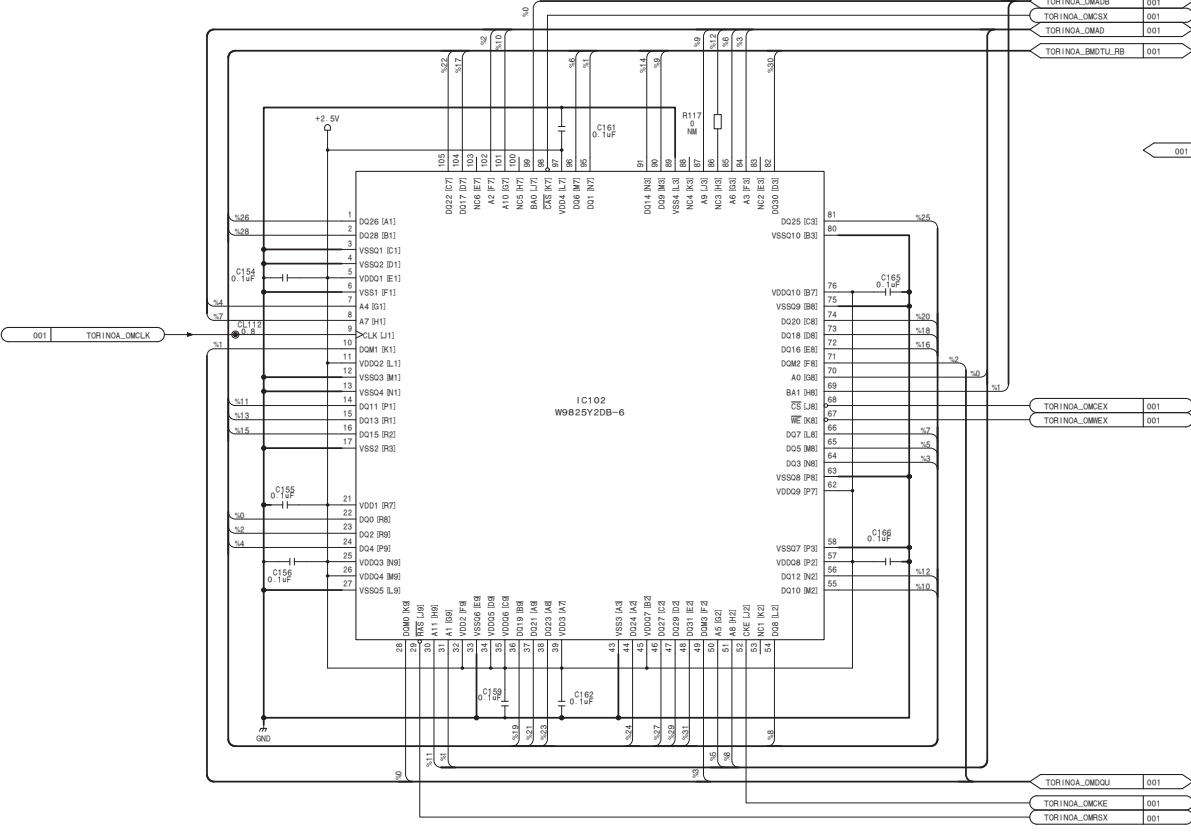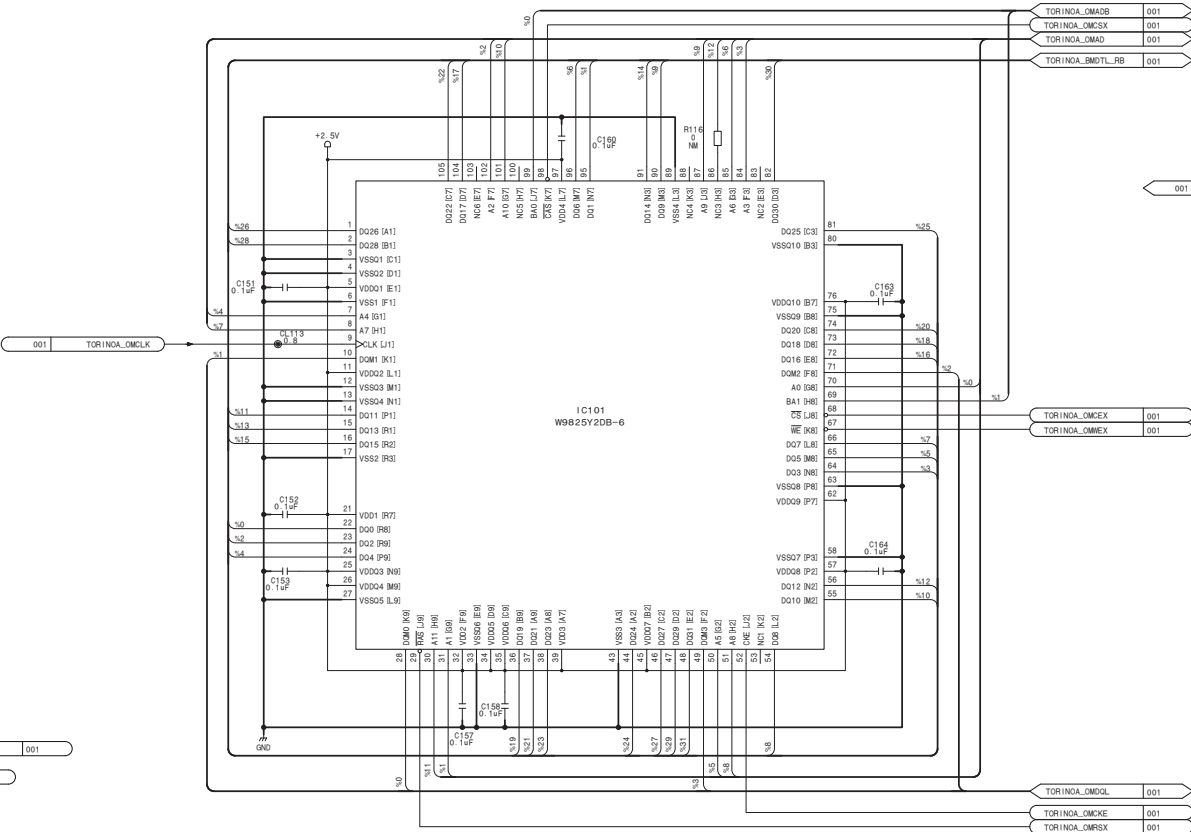


TORINO

ENC-112
BOARD NO. 1-879-595-11
ENC-112_011_1


FL-378

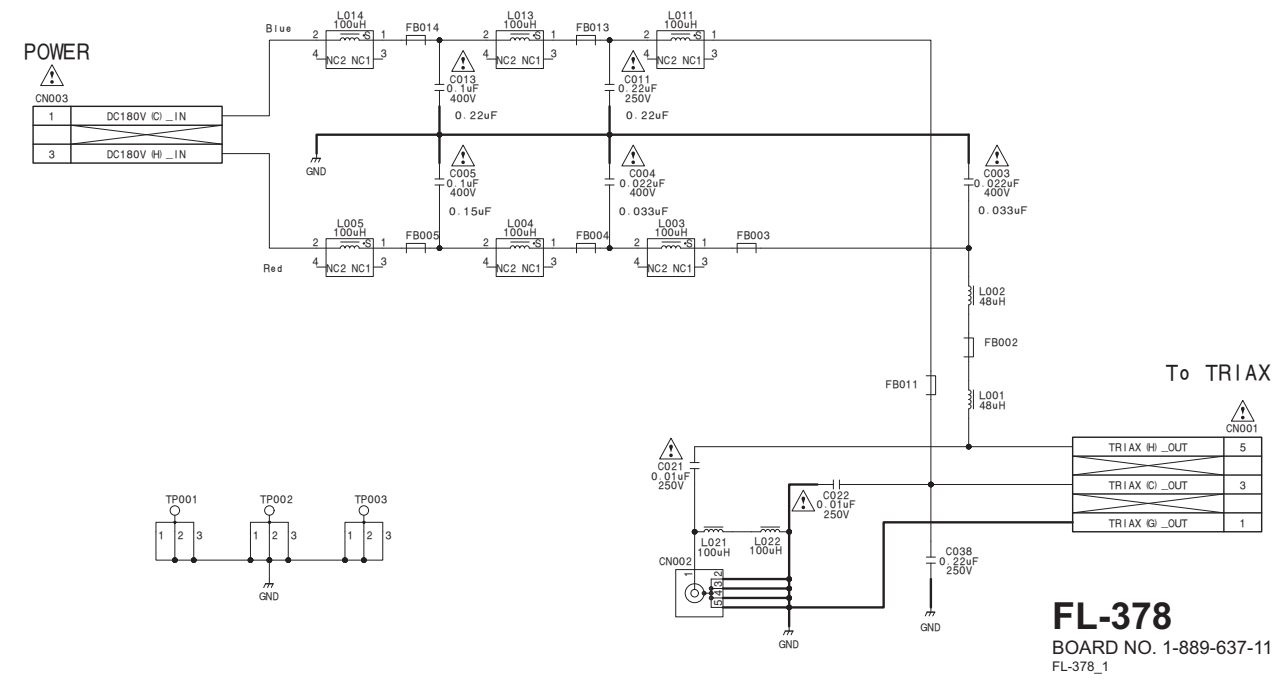

FL-379

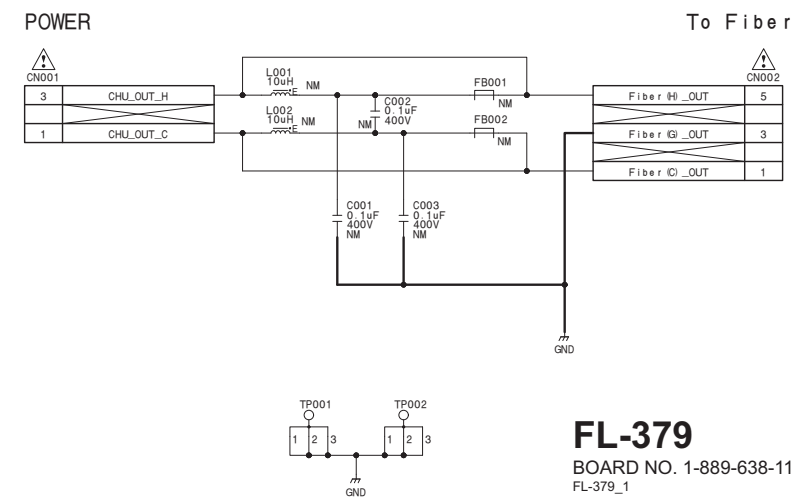


LED-525

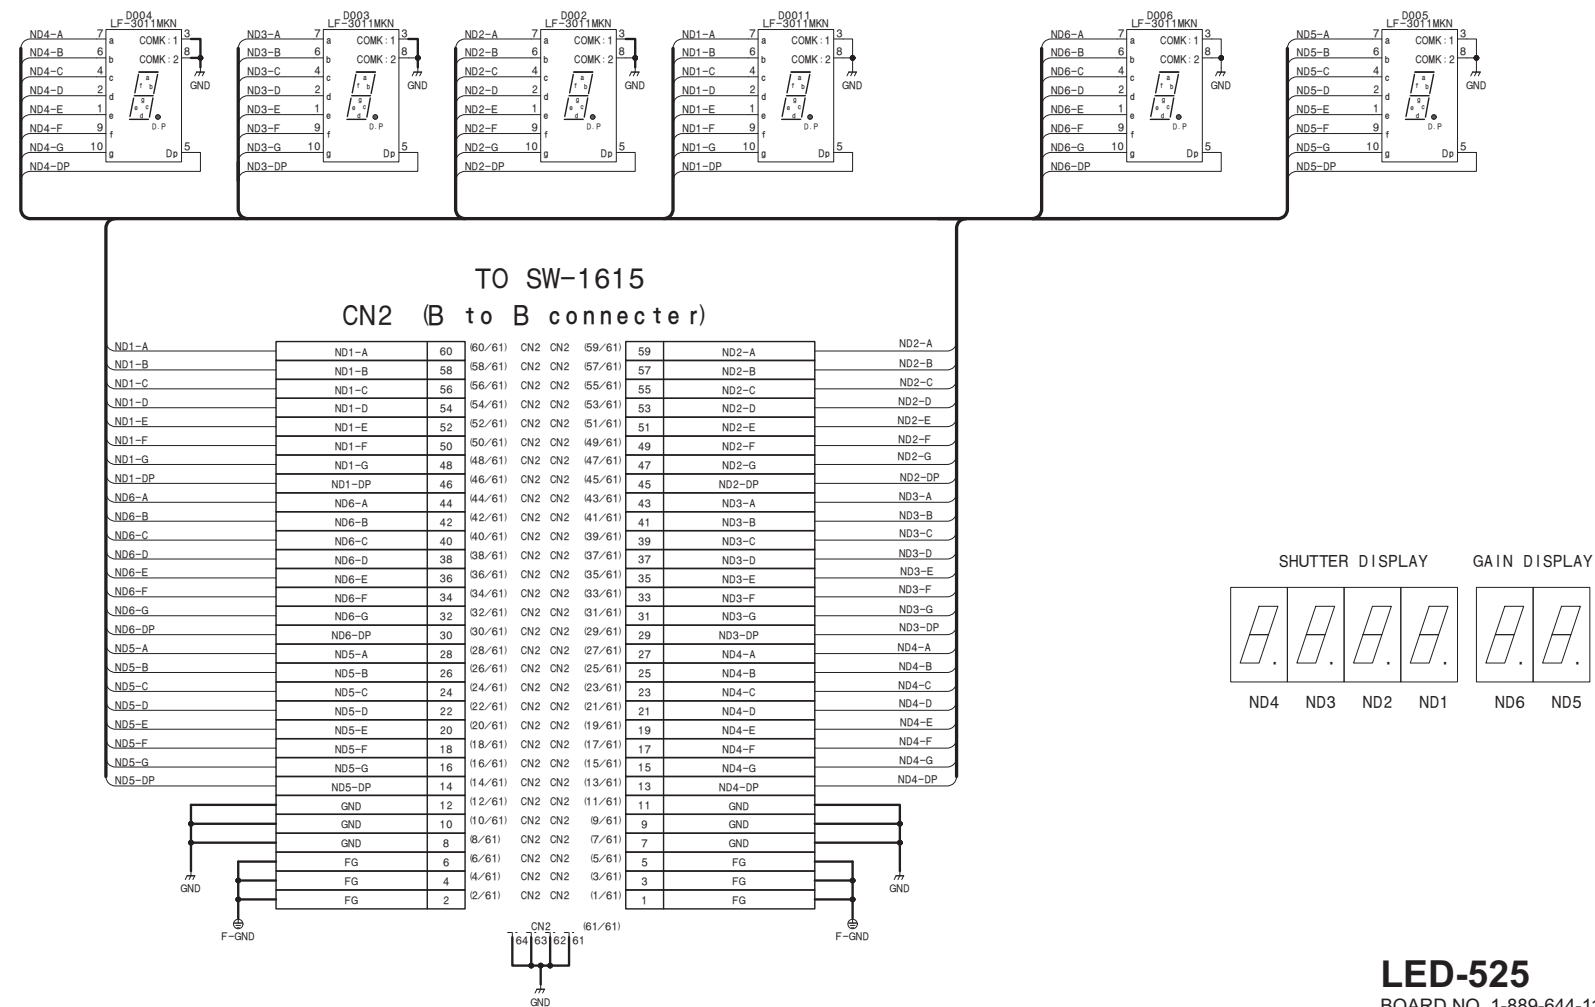


LED-525

BOARD NO. 1-889-644-11
LED-525_1


PS-739D
PS-739D (1/2)_L

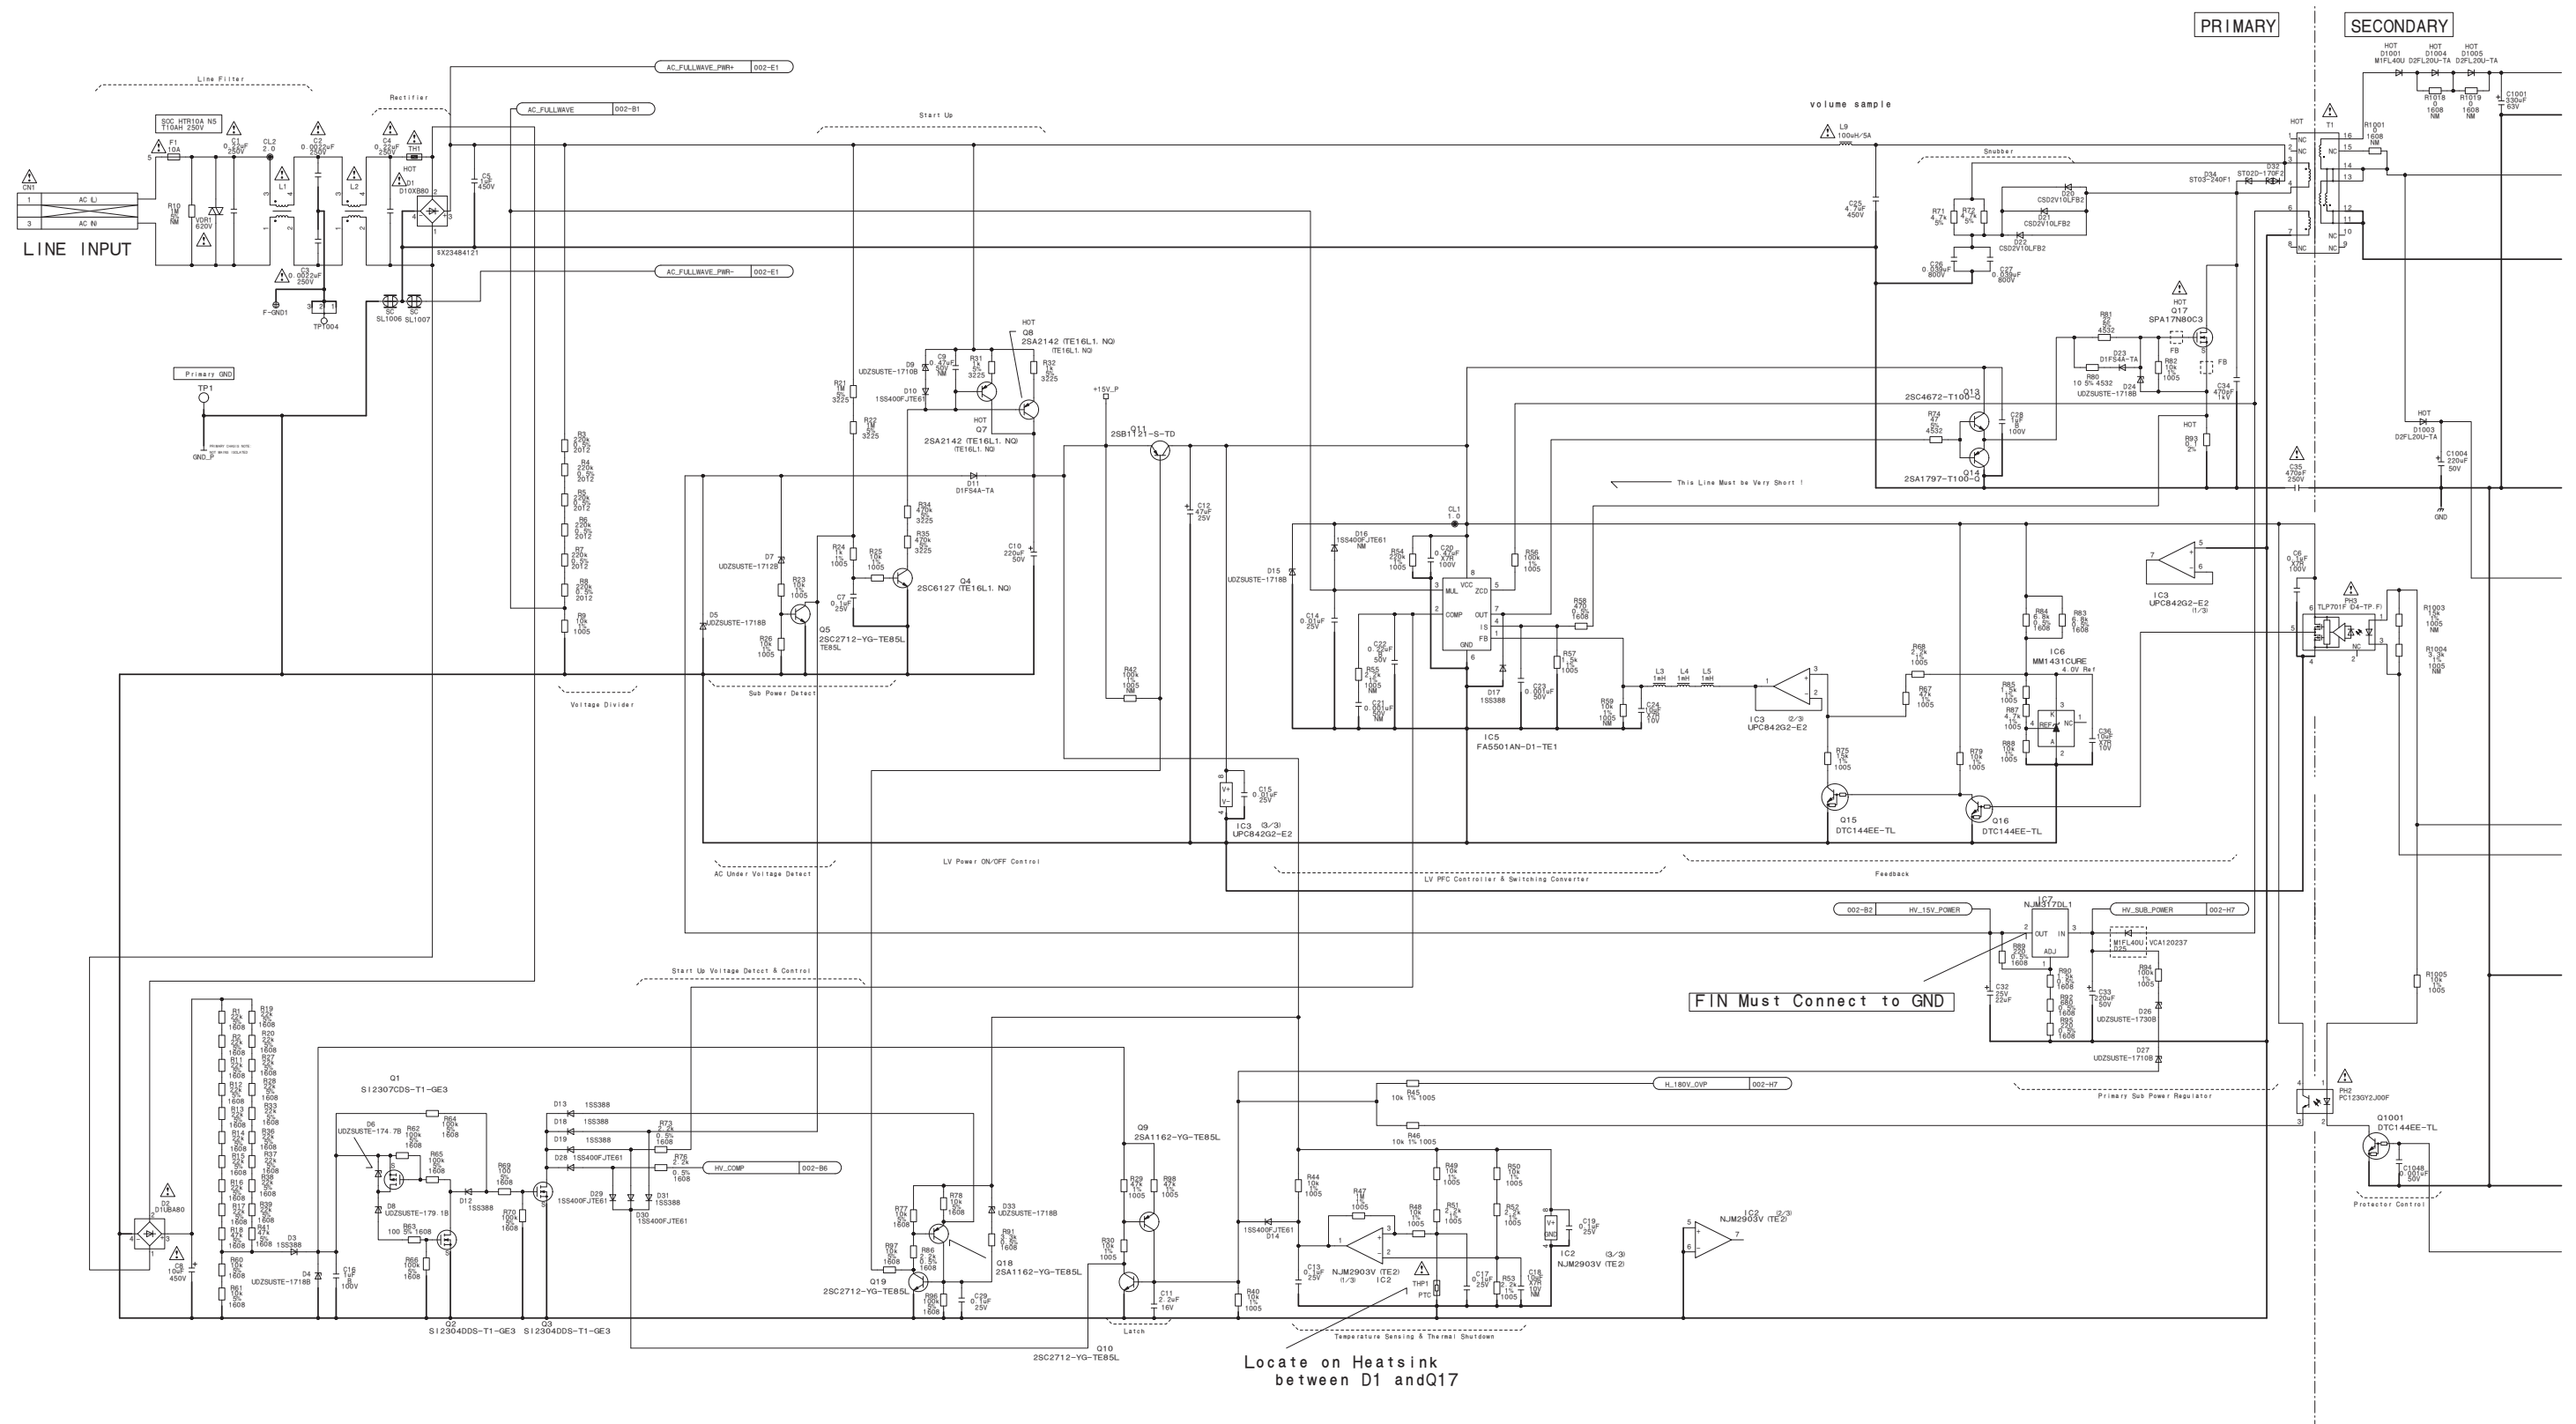


PS-739D (1/2)_R

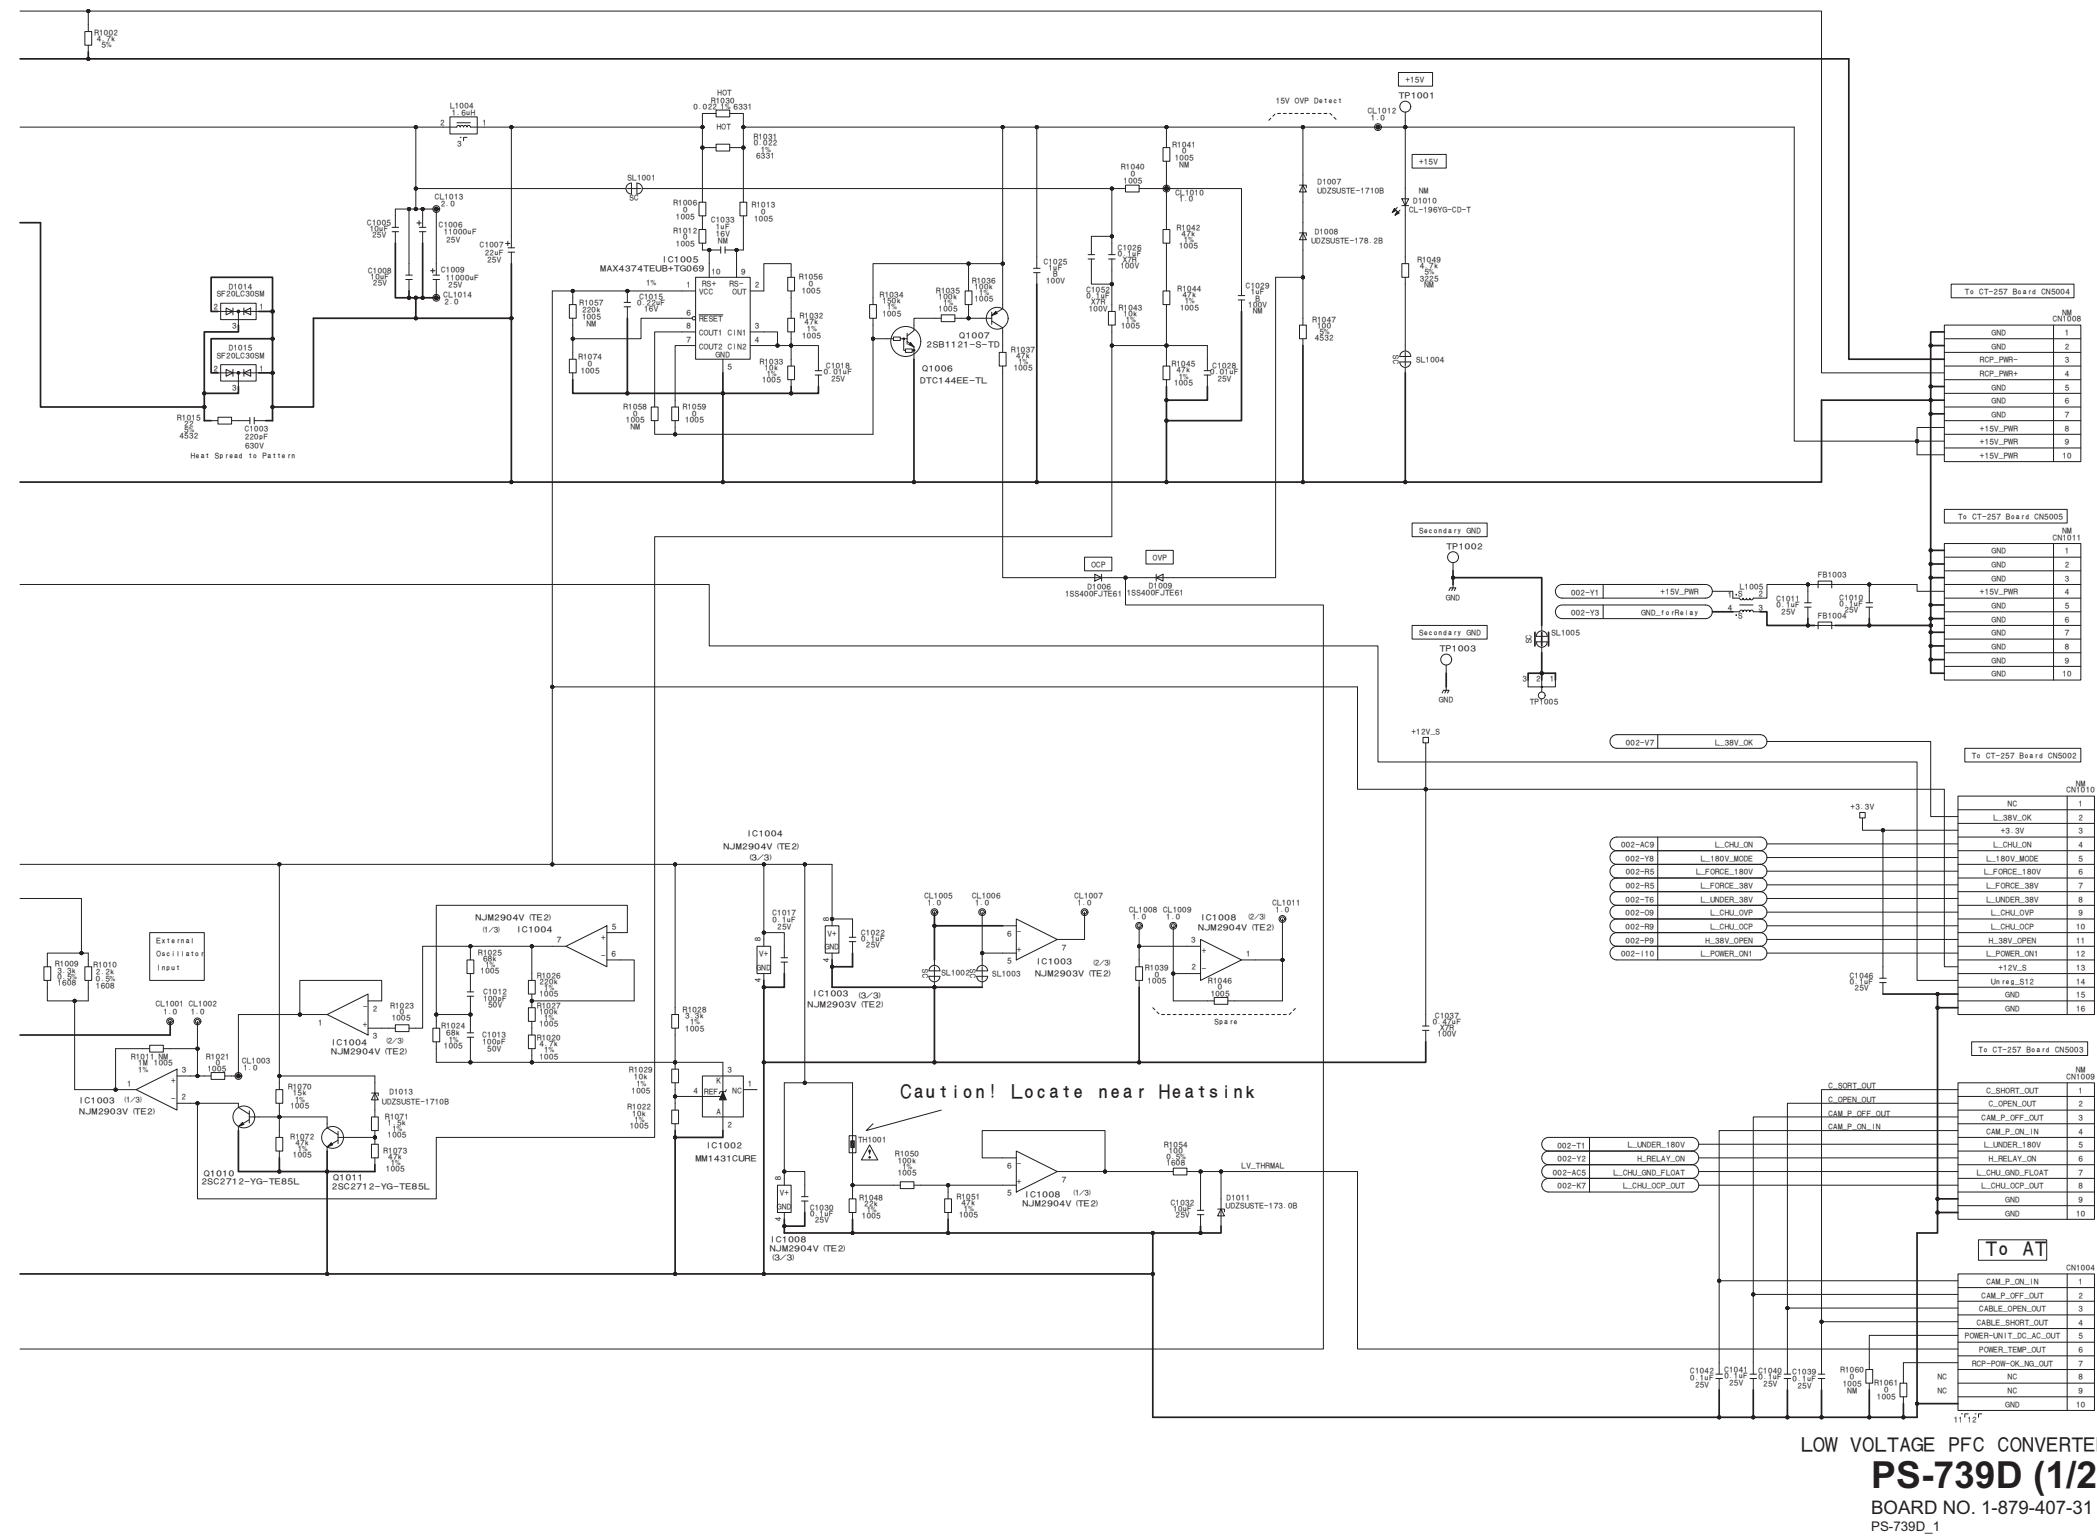




PS-739D (2/2)_L

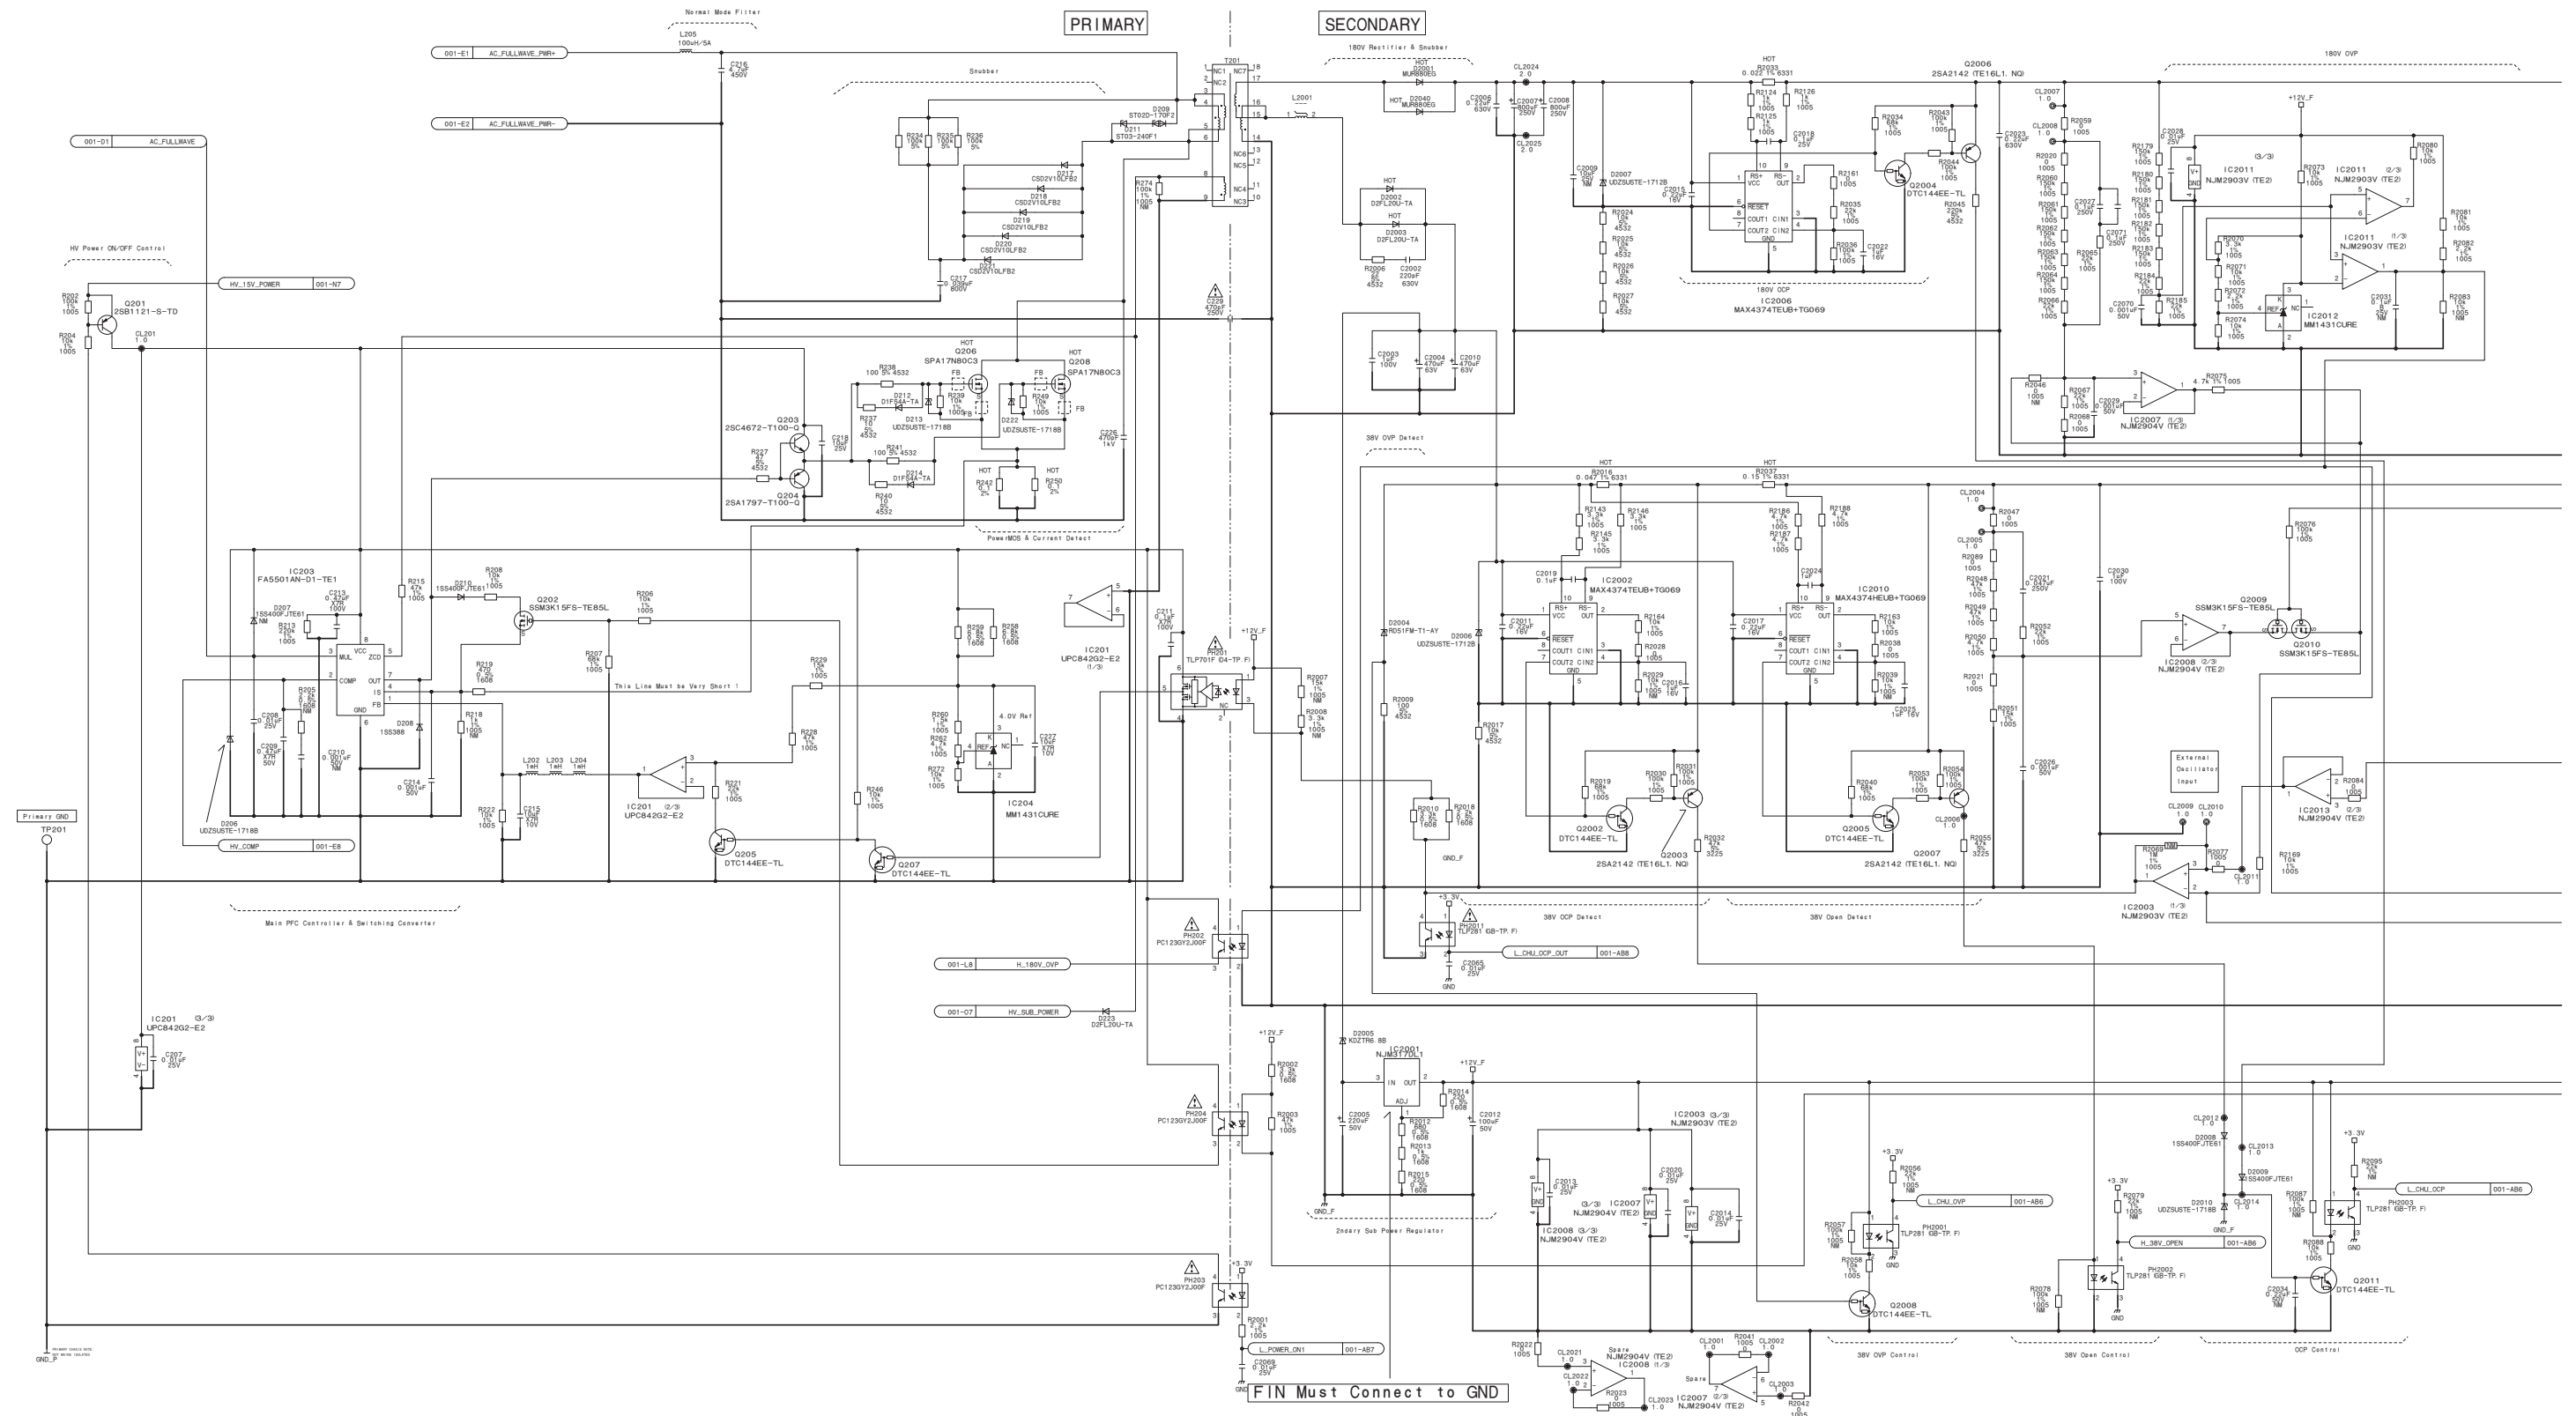

PS-739D (2/2)_R

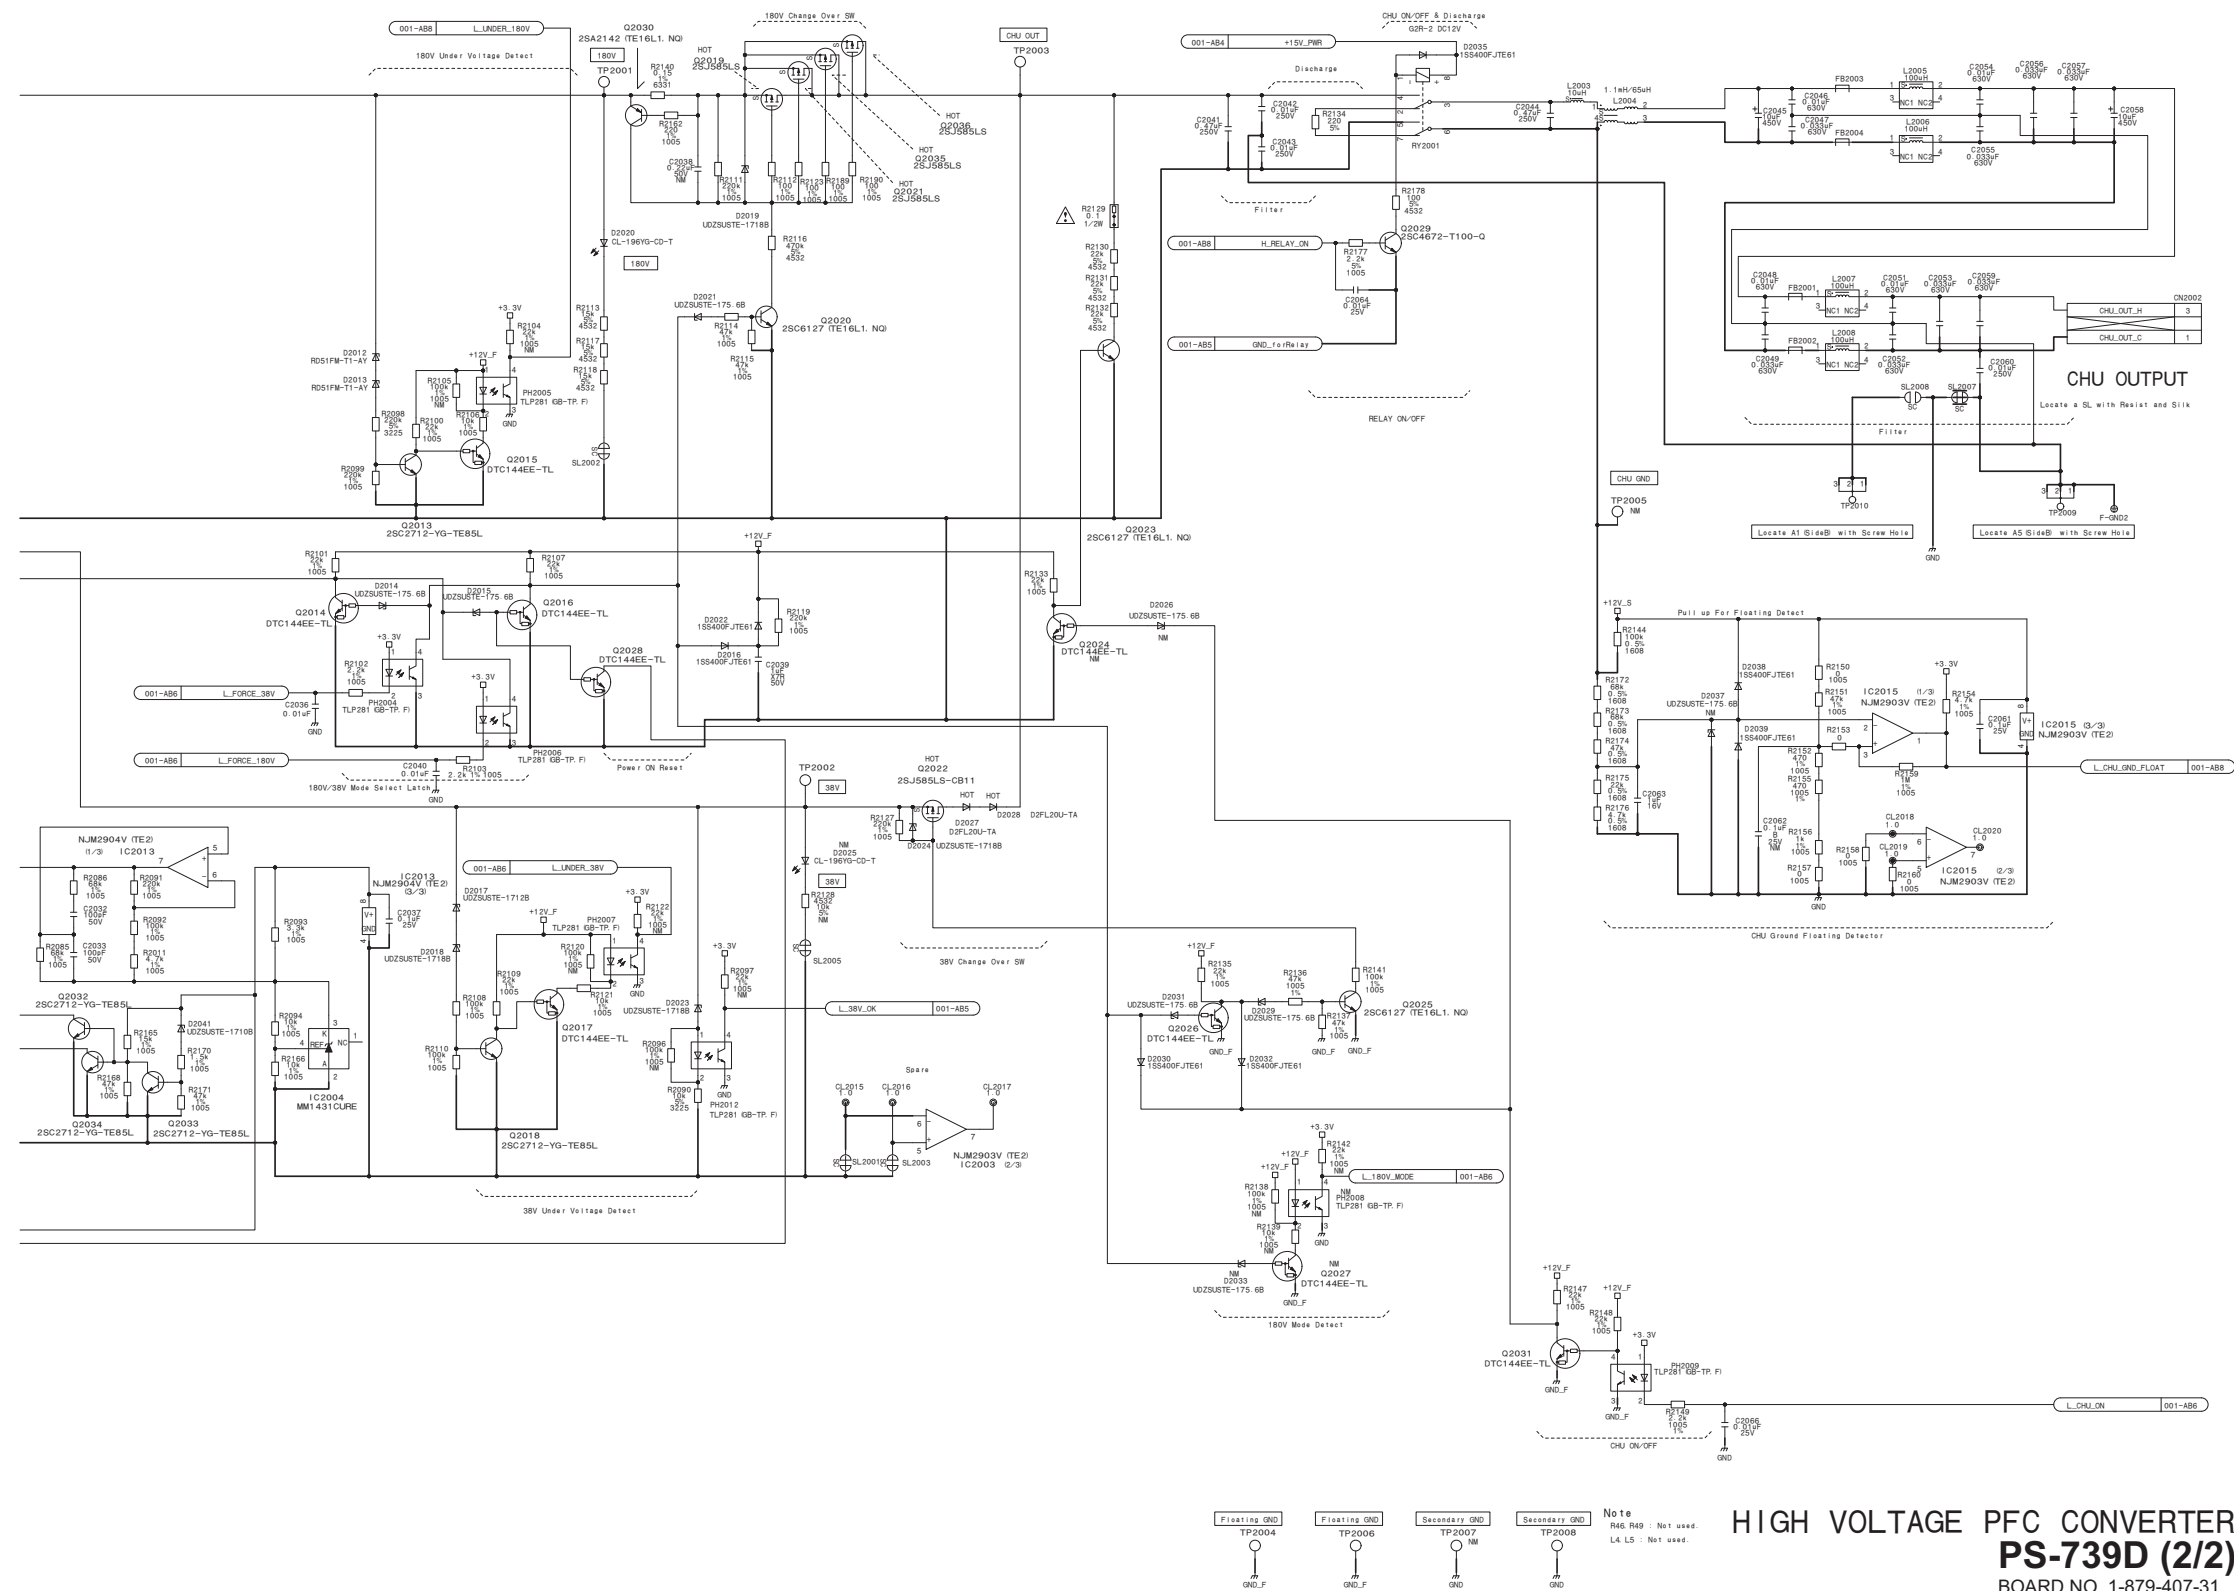


SDP-19
SDP-19 (1/5)

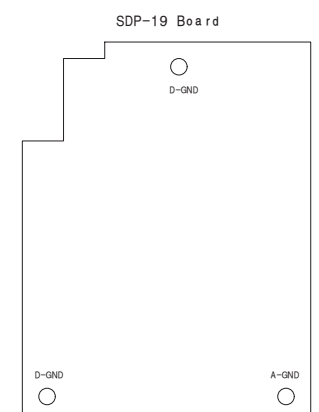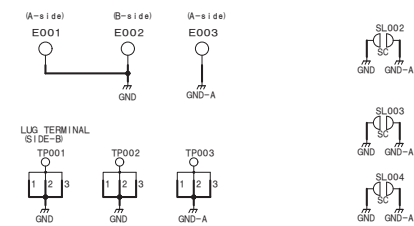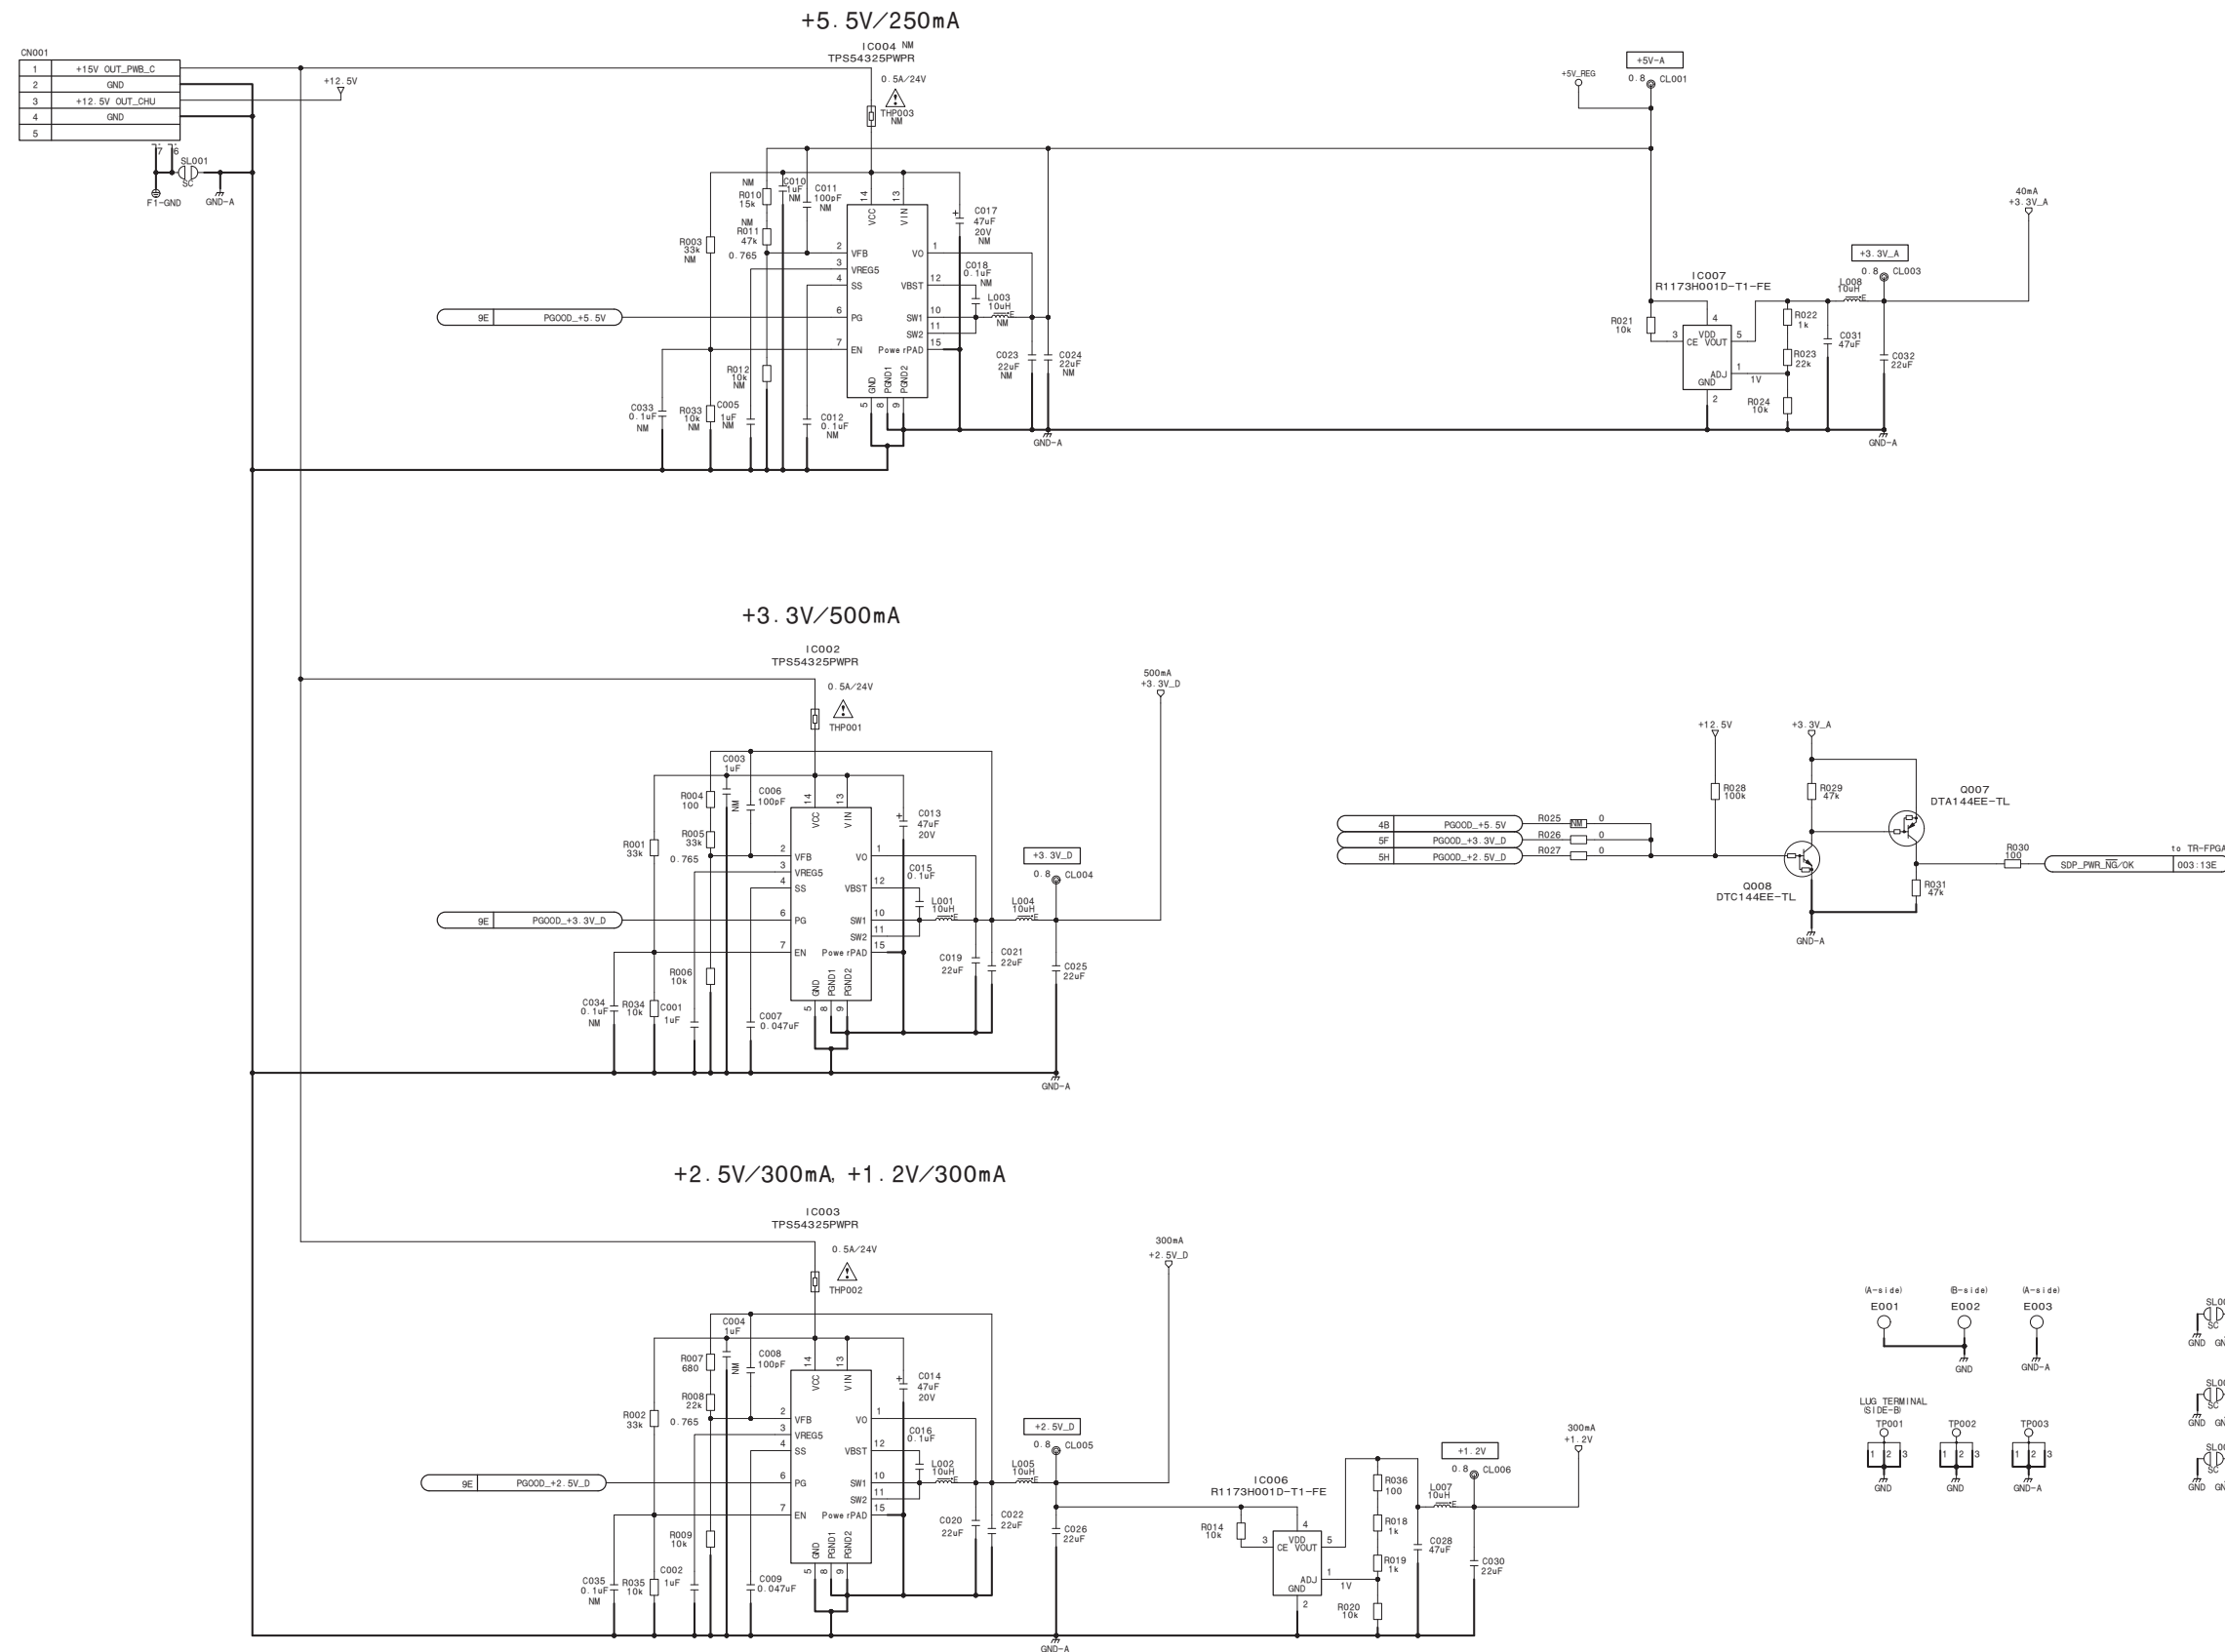


SDP-19 (1/5)
BOARD NO. 1-889-635-11
SDP-19_1

SDP-19 (2/5)


to DPR-361
FFC 45pin AN-type

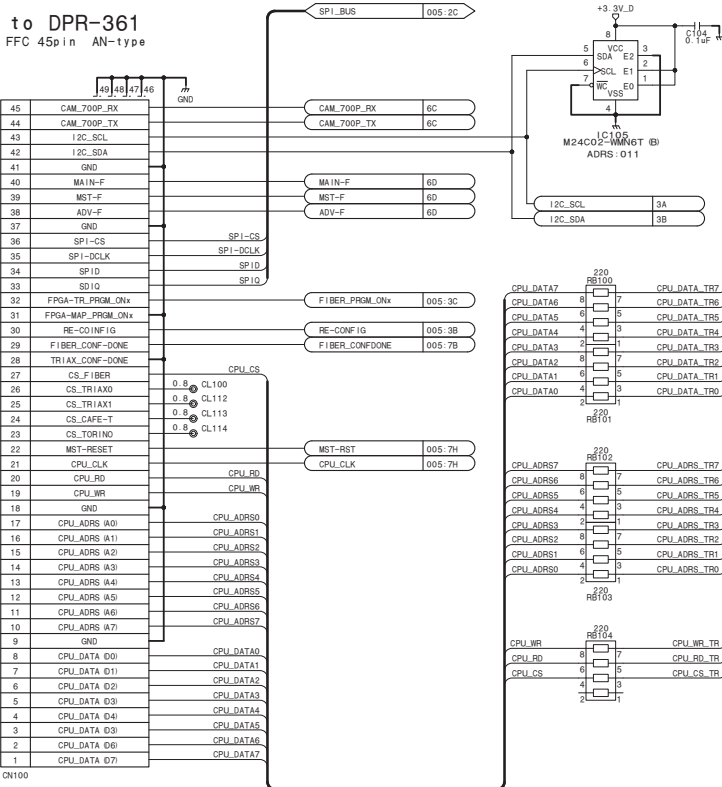


to DPR-361
FFC 45pin AN-type

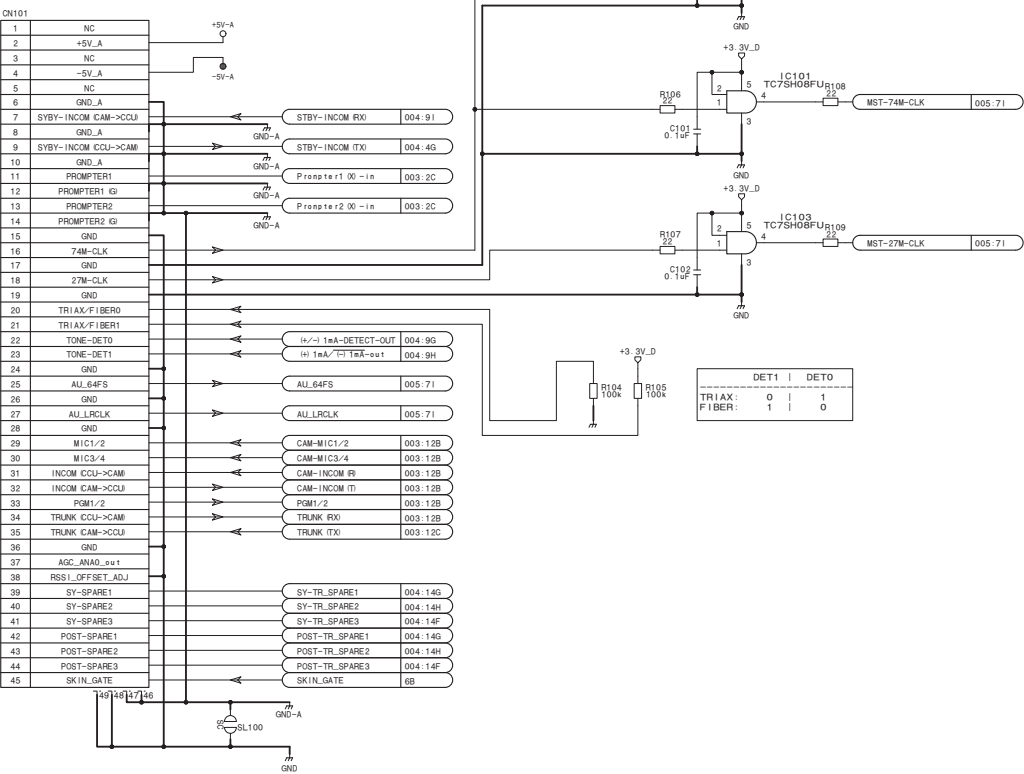


<TR-FPGA>
BANK5

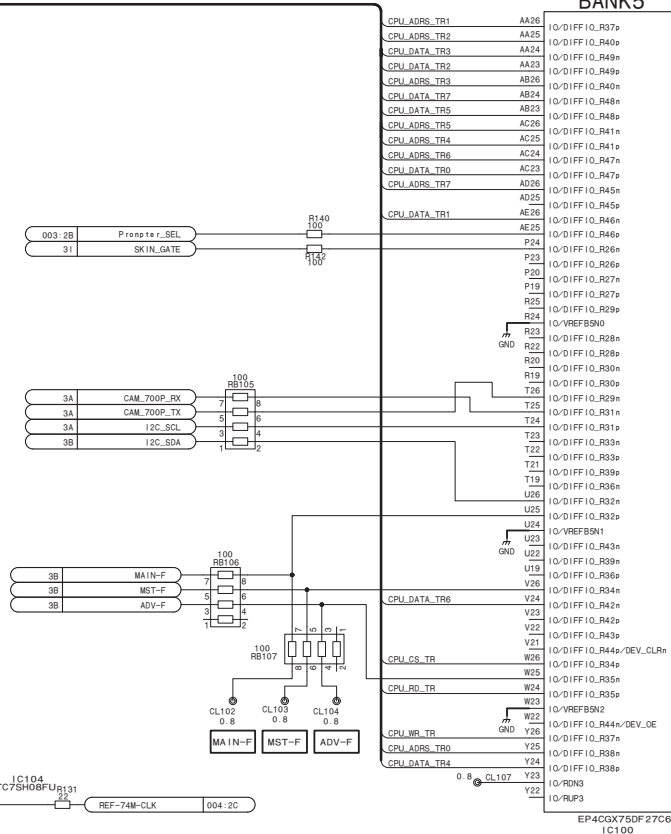

<TR-FPGA>
BANK8

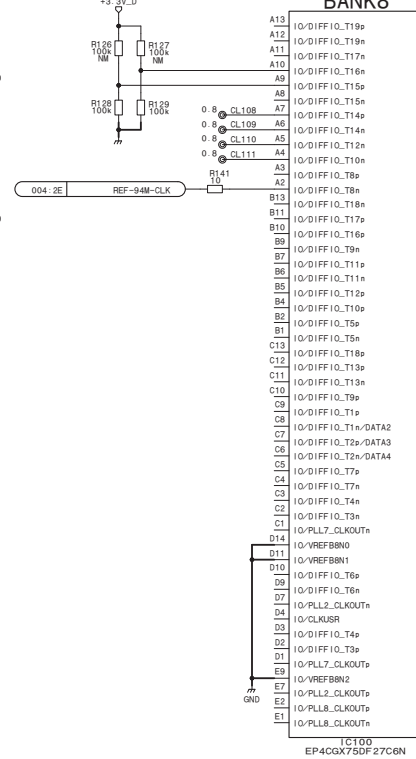


<TR-FPGA>
BANK7

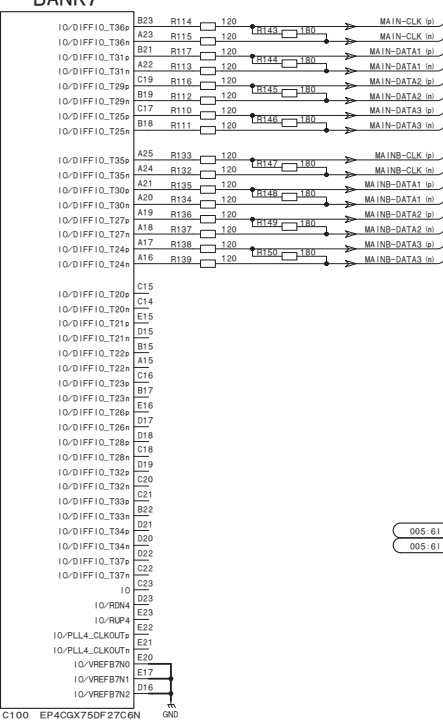


<TR-FPGA>
BANK6



LVDS VIDEO

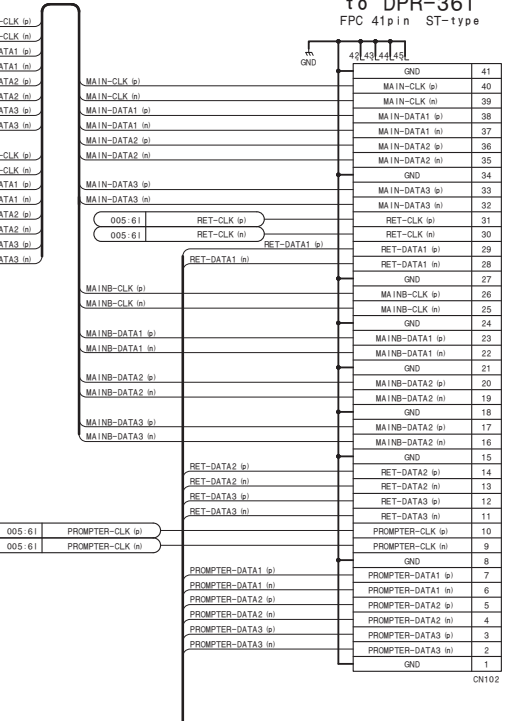

to DPR-361
FFC 41pin ST-type

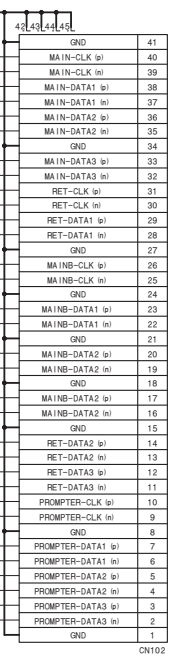


DPR IF

SDP-19 (2/5)
BOARD NO. 1-889-635-11
SDP-19_2

HSCU300RF/HSCU300R



SDP-19 (4/5)


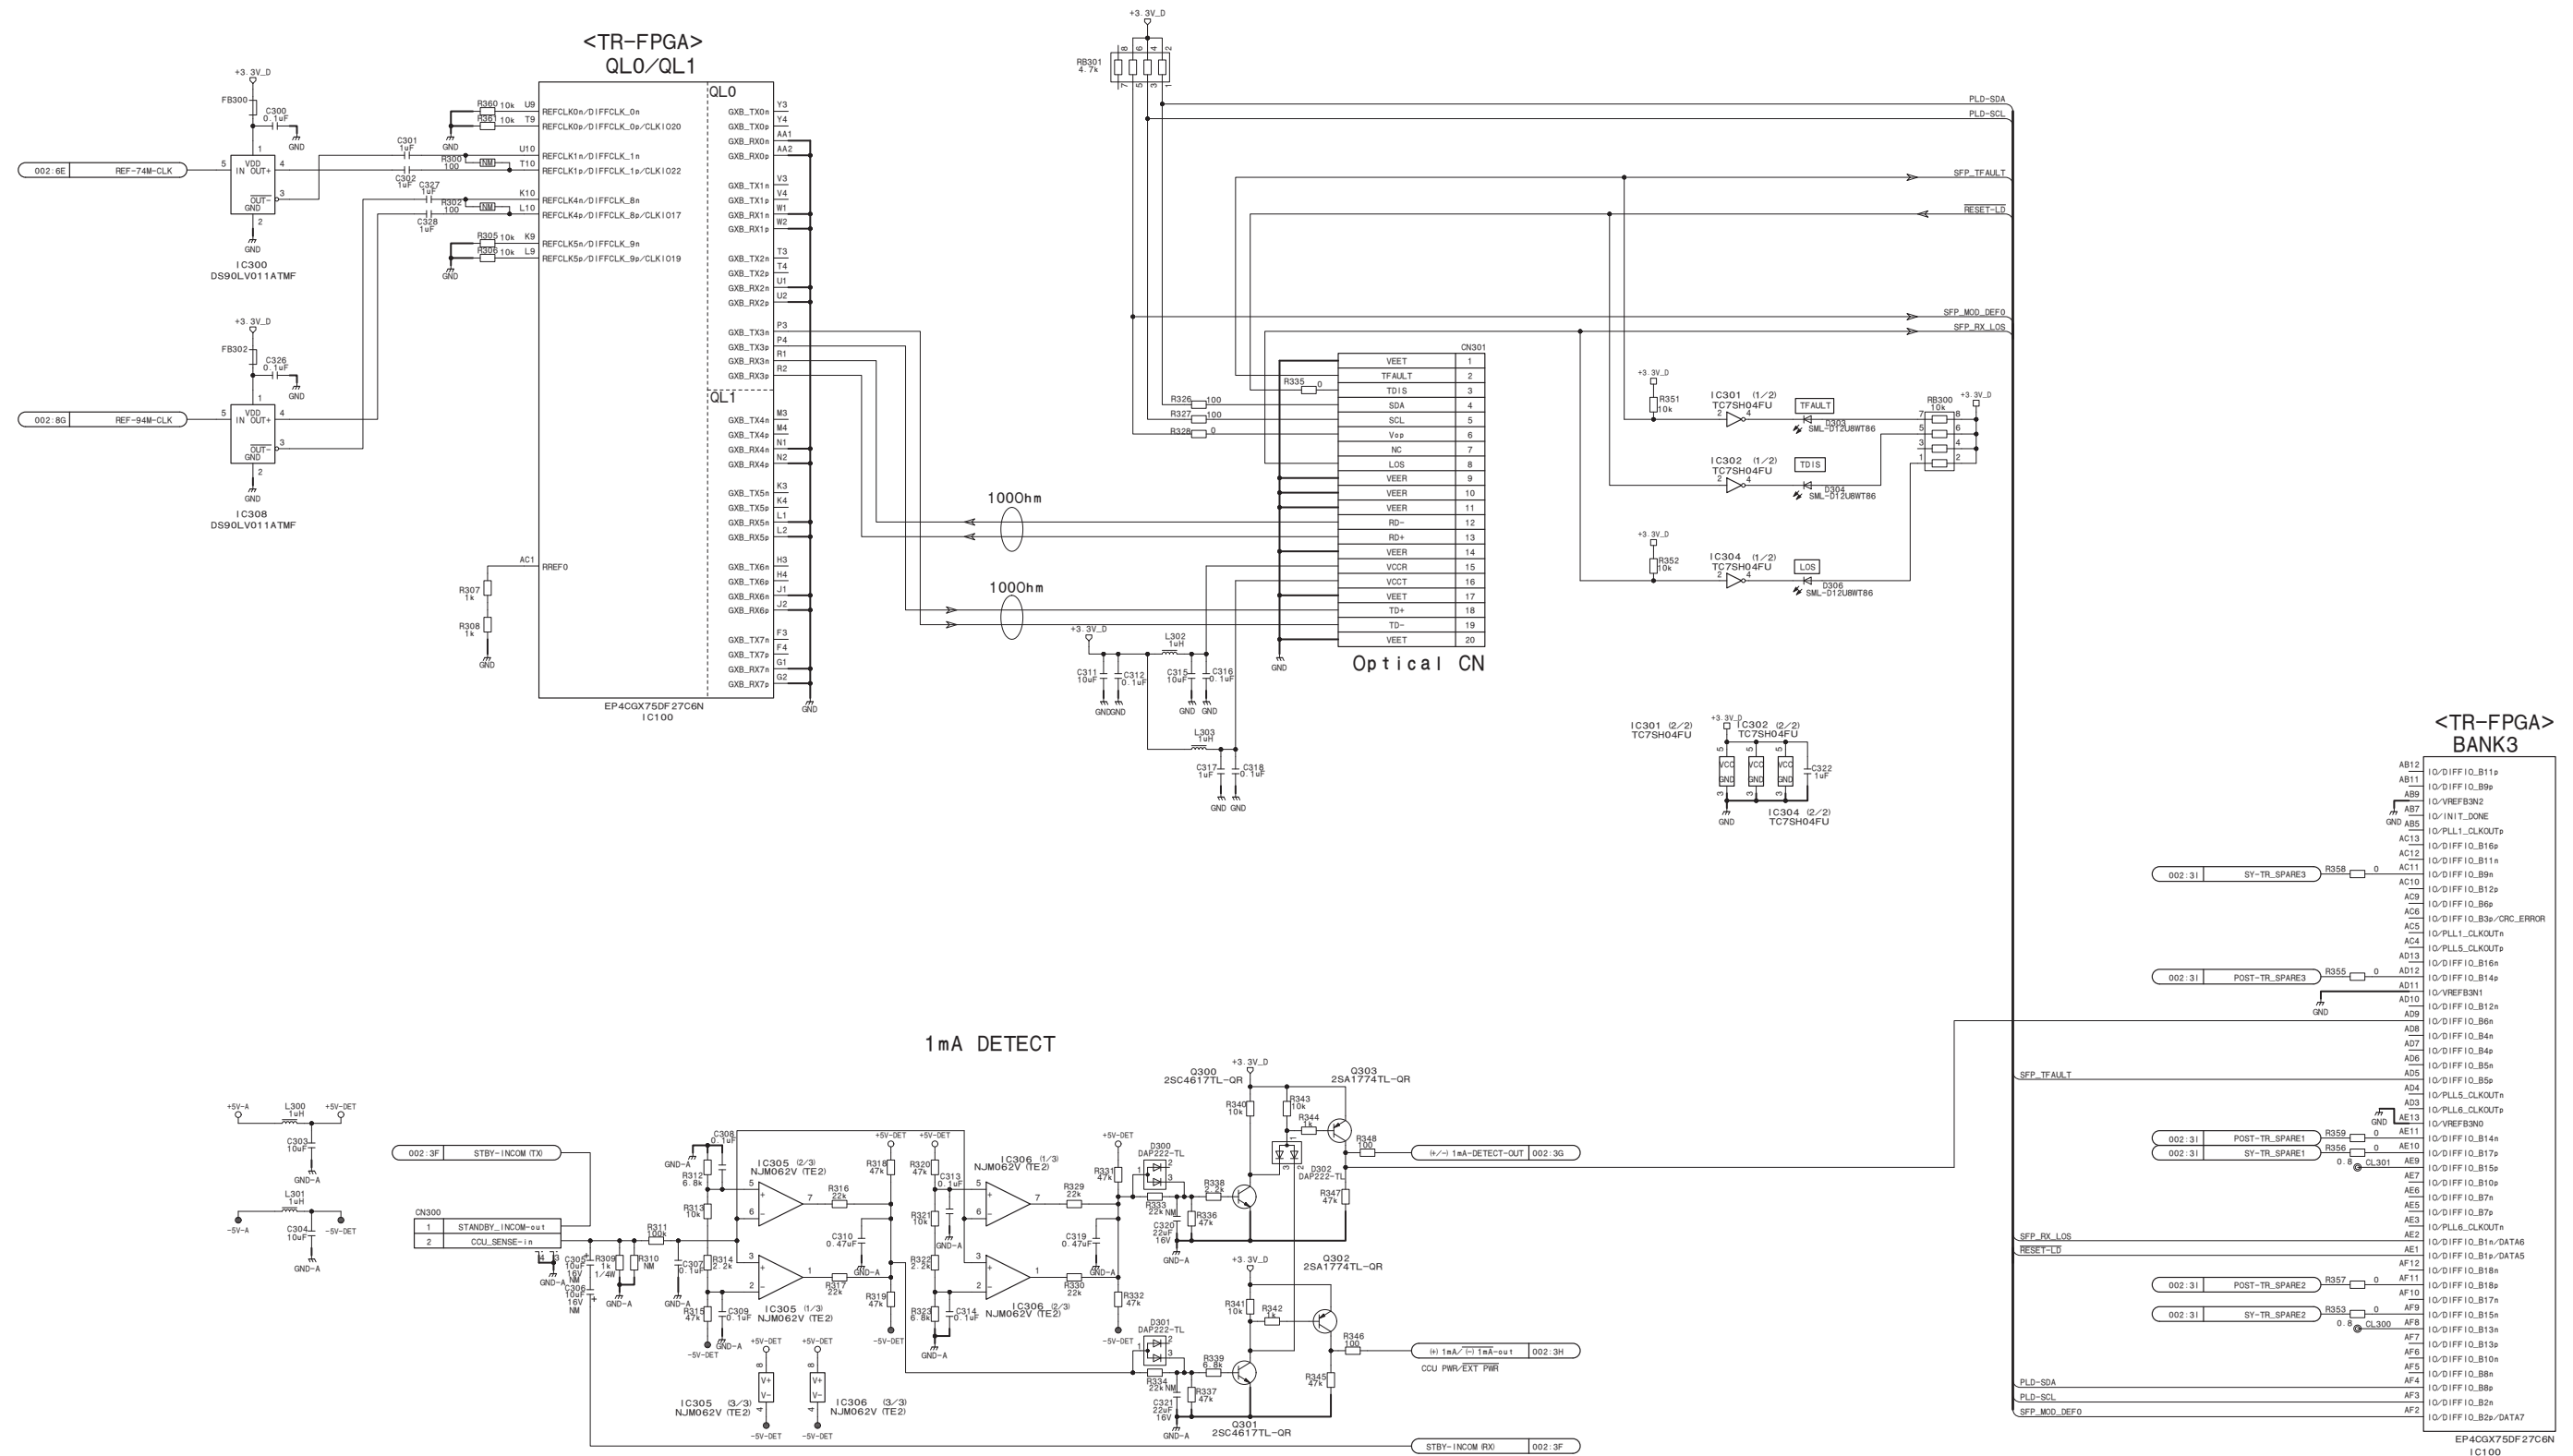


EO/OE

SDP-19 (4/5)


BOARD NO. 1-889-635-11
SDP-19_4

SDP-19 (5/5)

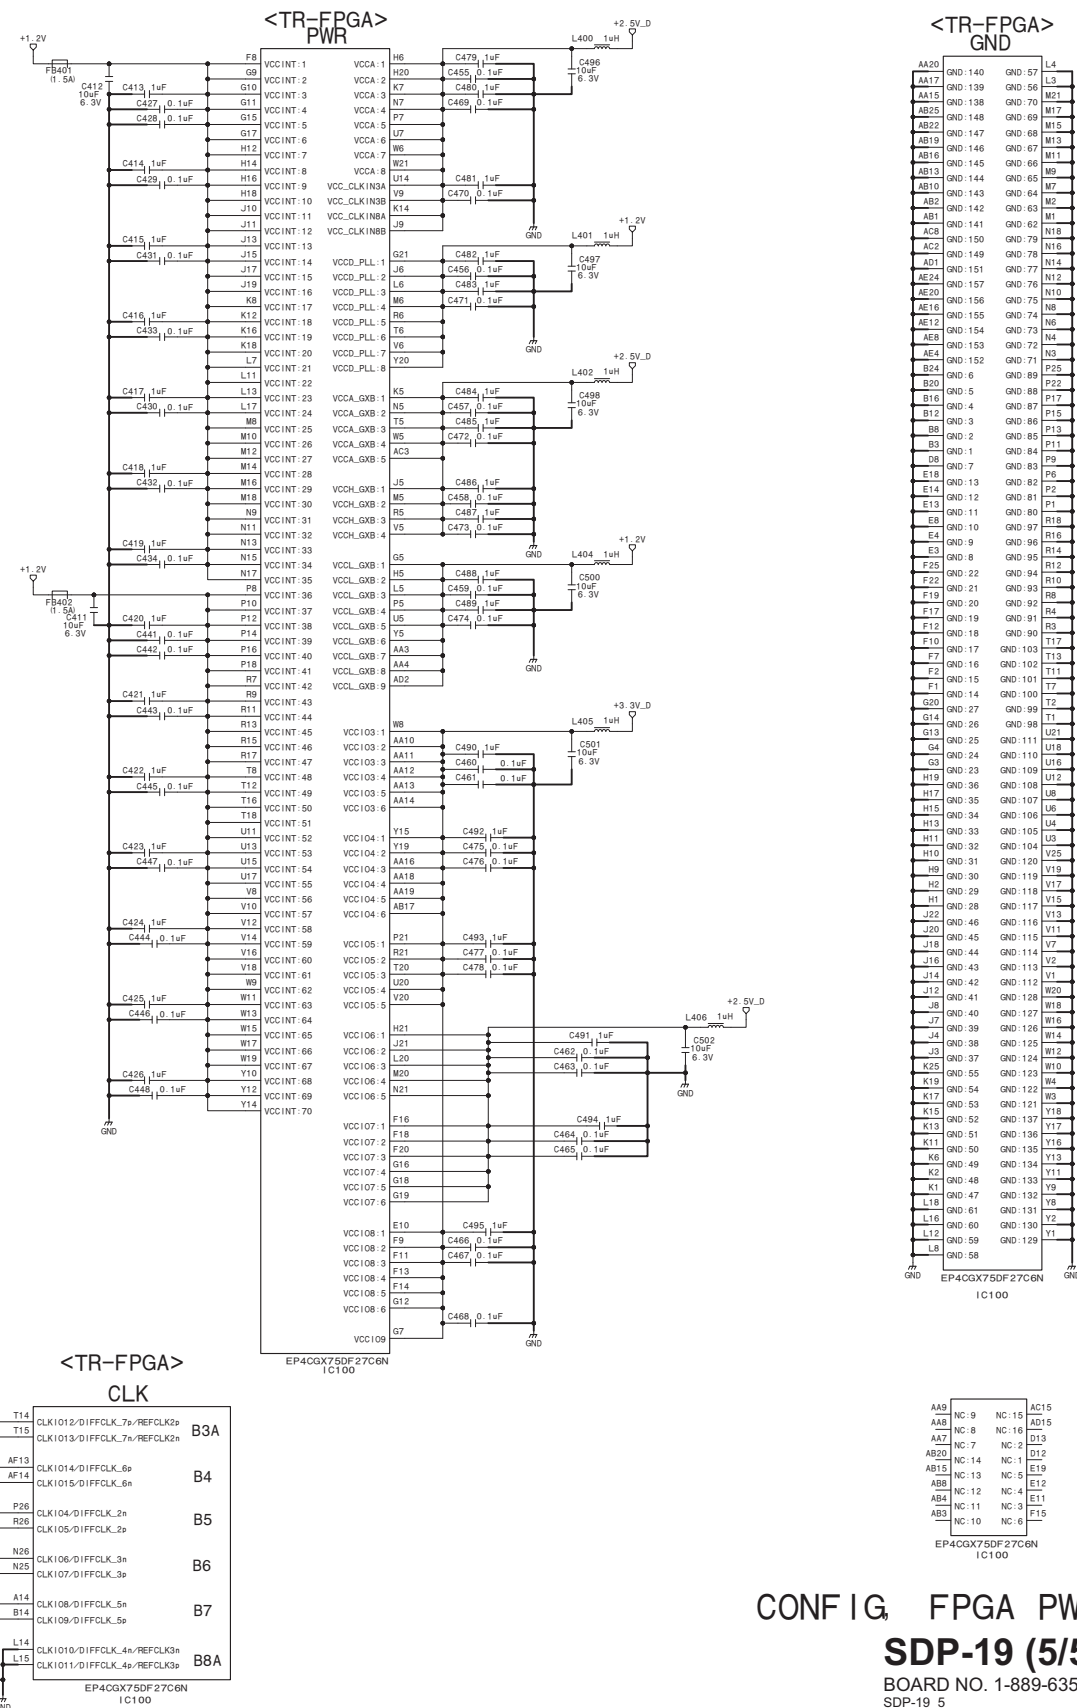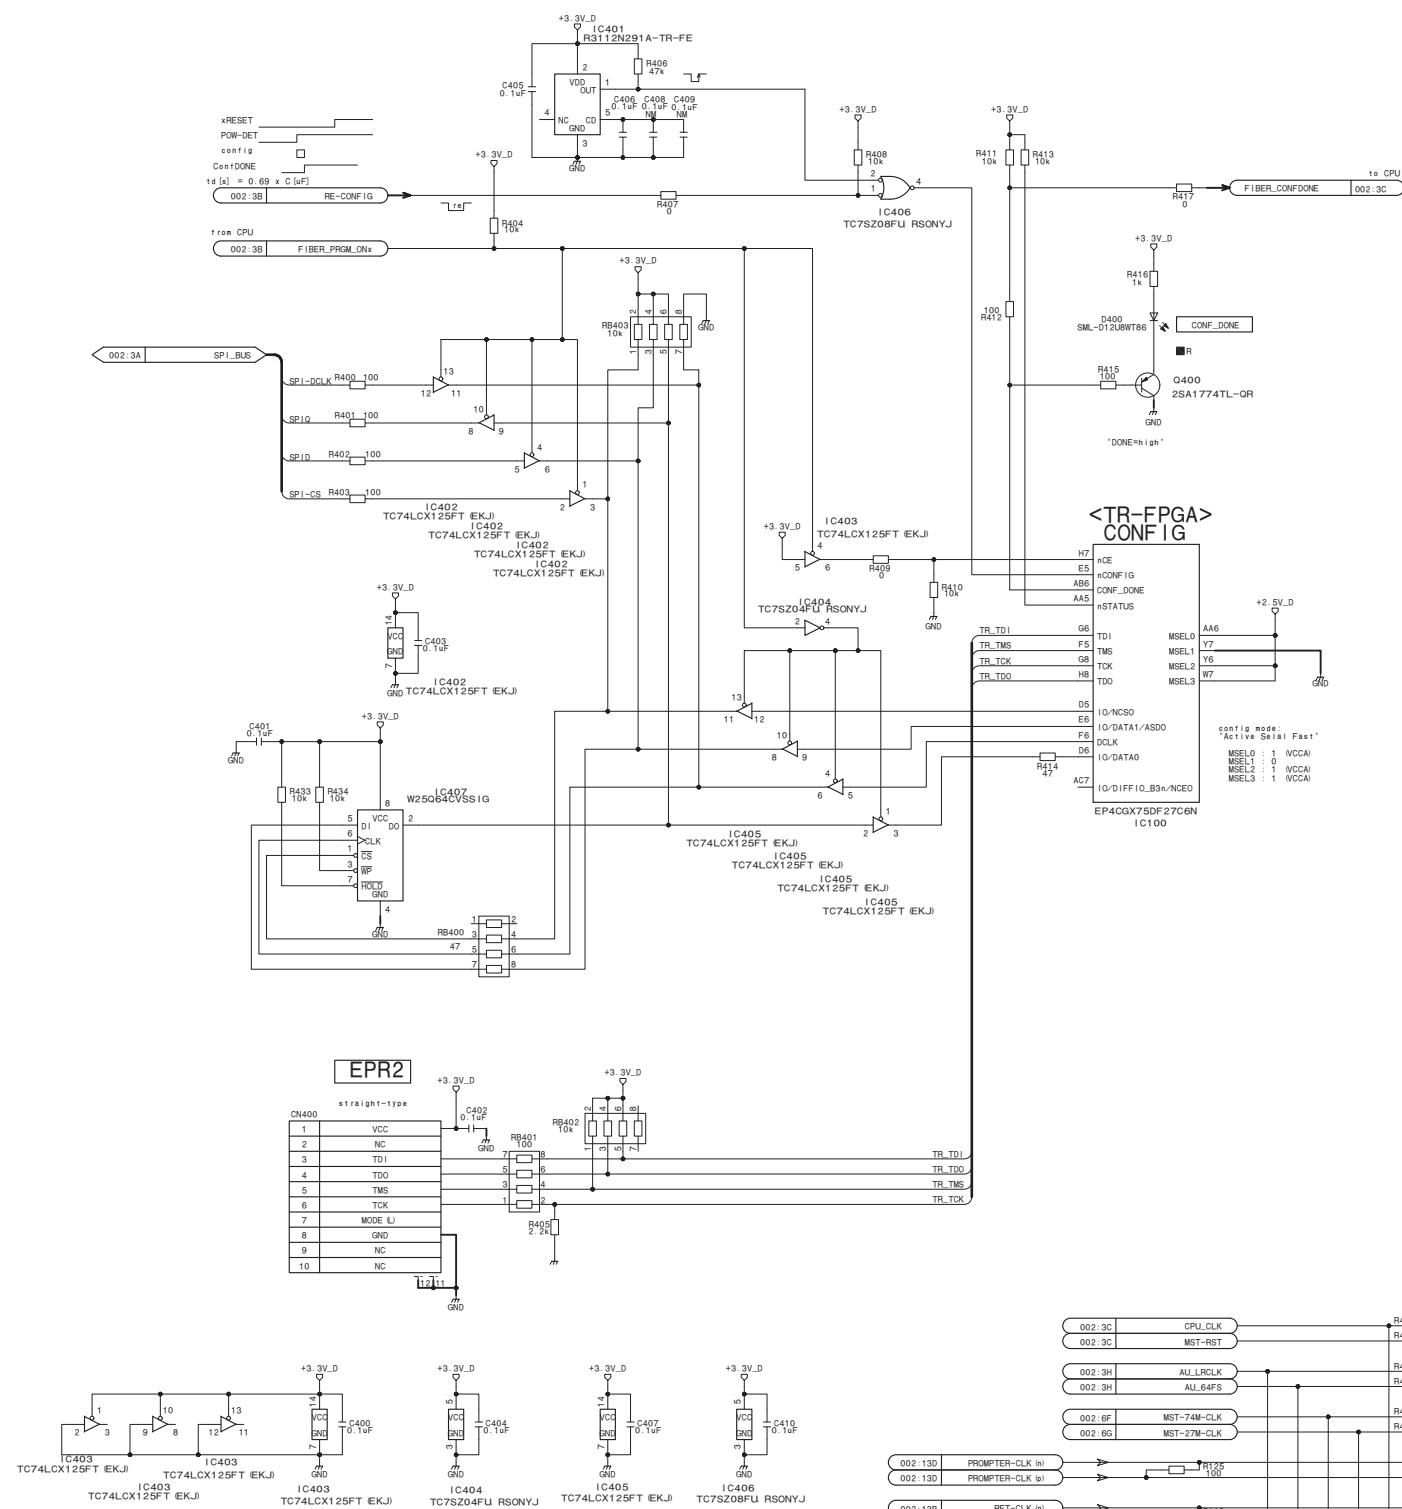


CONF IG, FPGA PWR
SDP-19 (5/5)
BOARD NO. 1-889-635-11
SDP-19.5

SW-1615
SW-1615 (1/3)

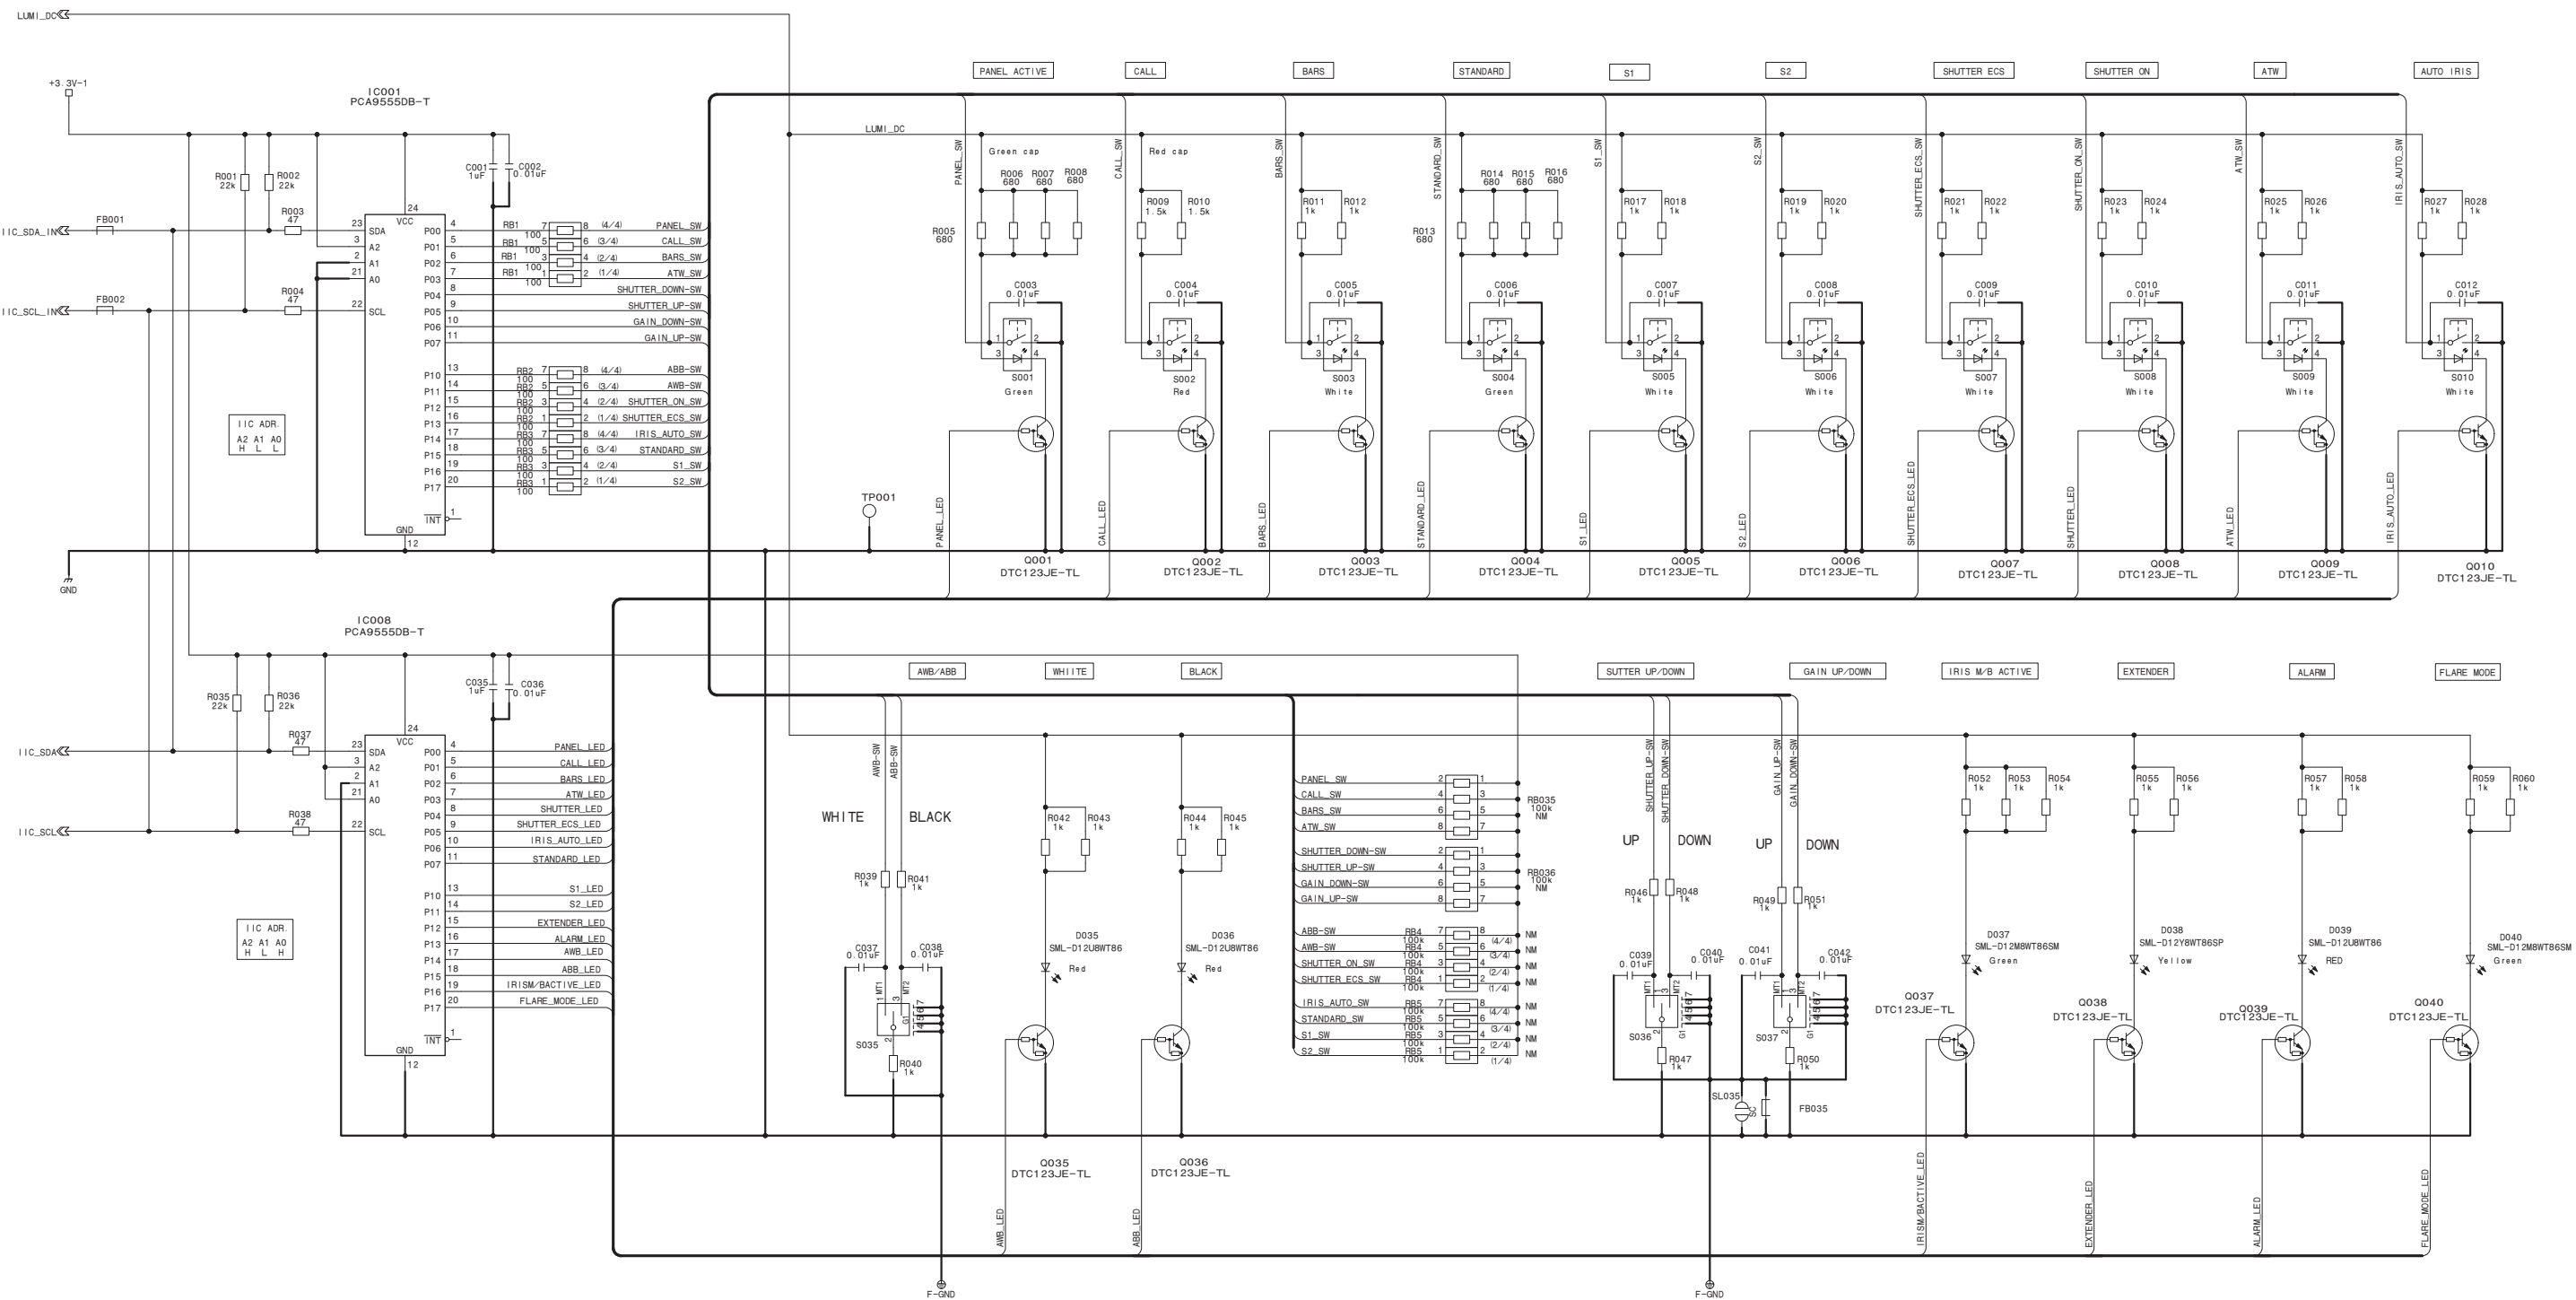


SW-1615 (1/3)
BOARD NO. 1-889-643-11
SW-1615_1

SW-1615 (2/3)

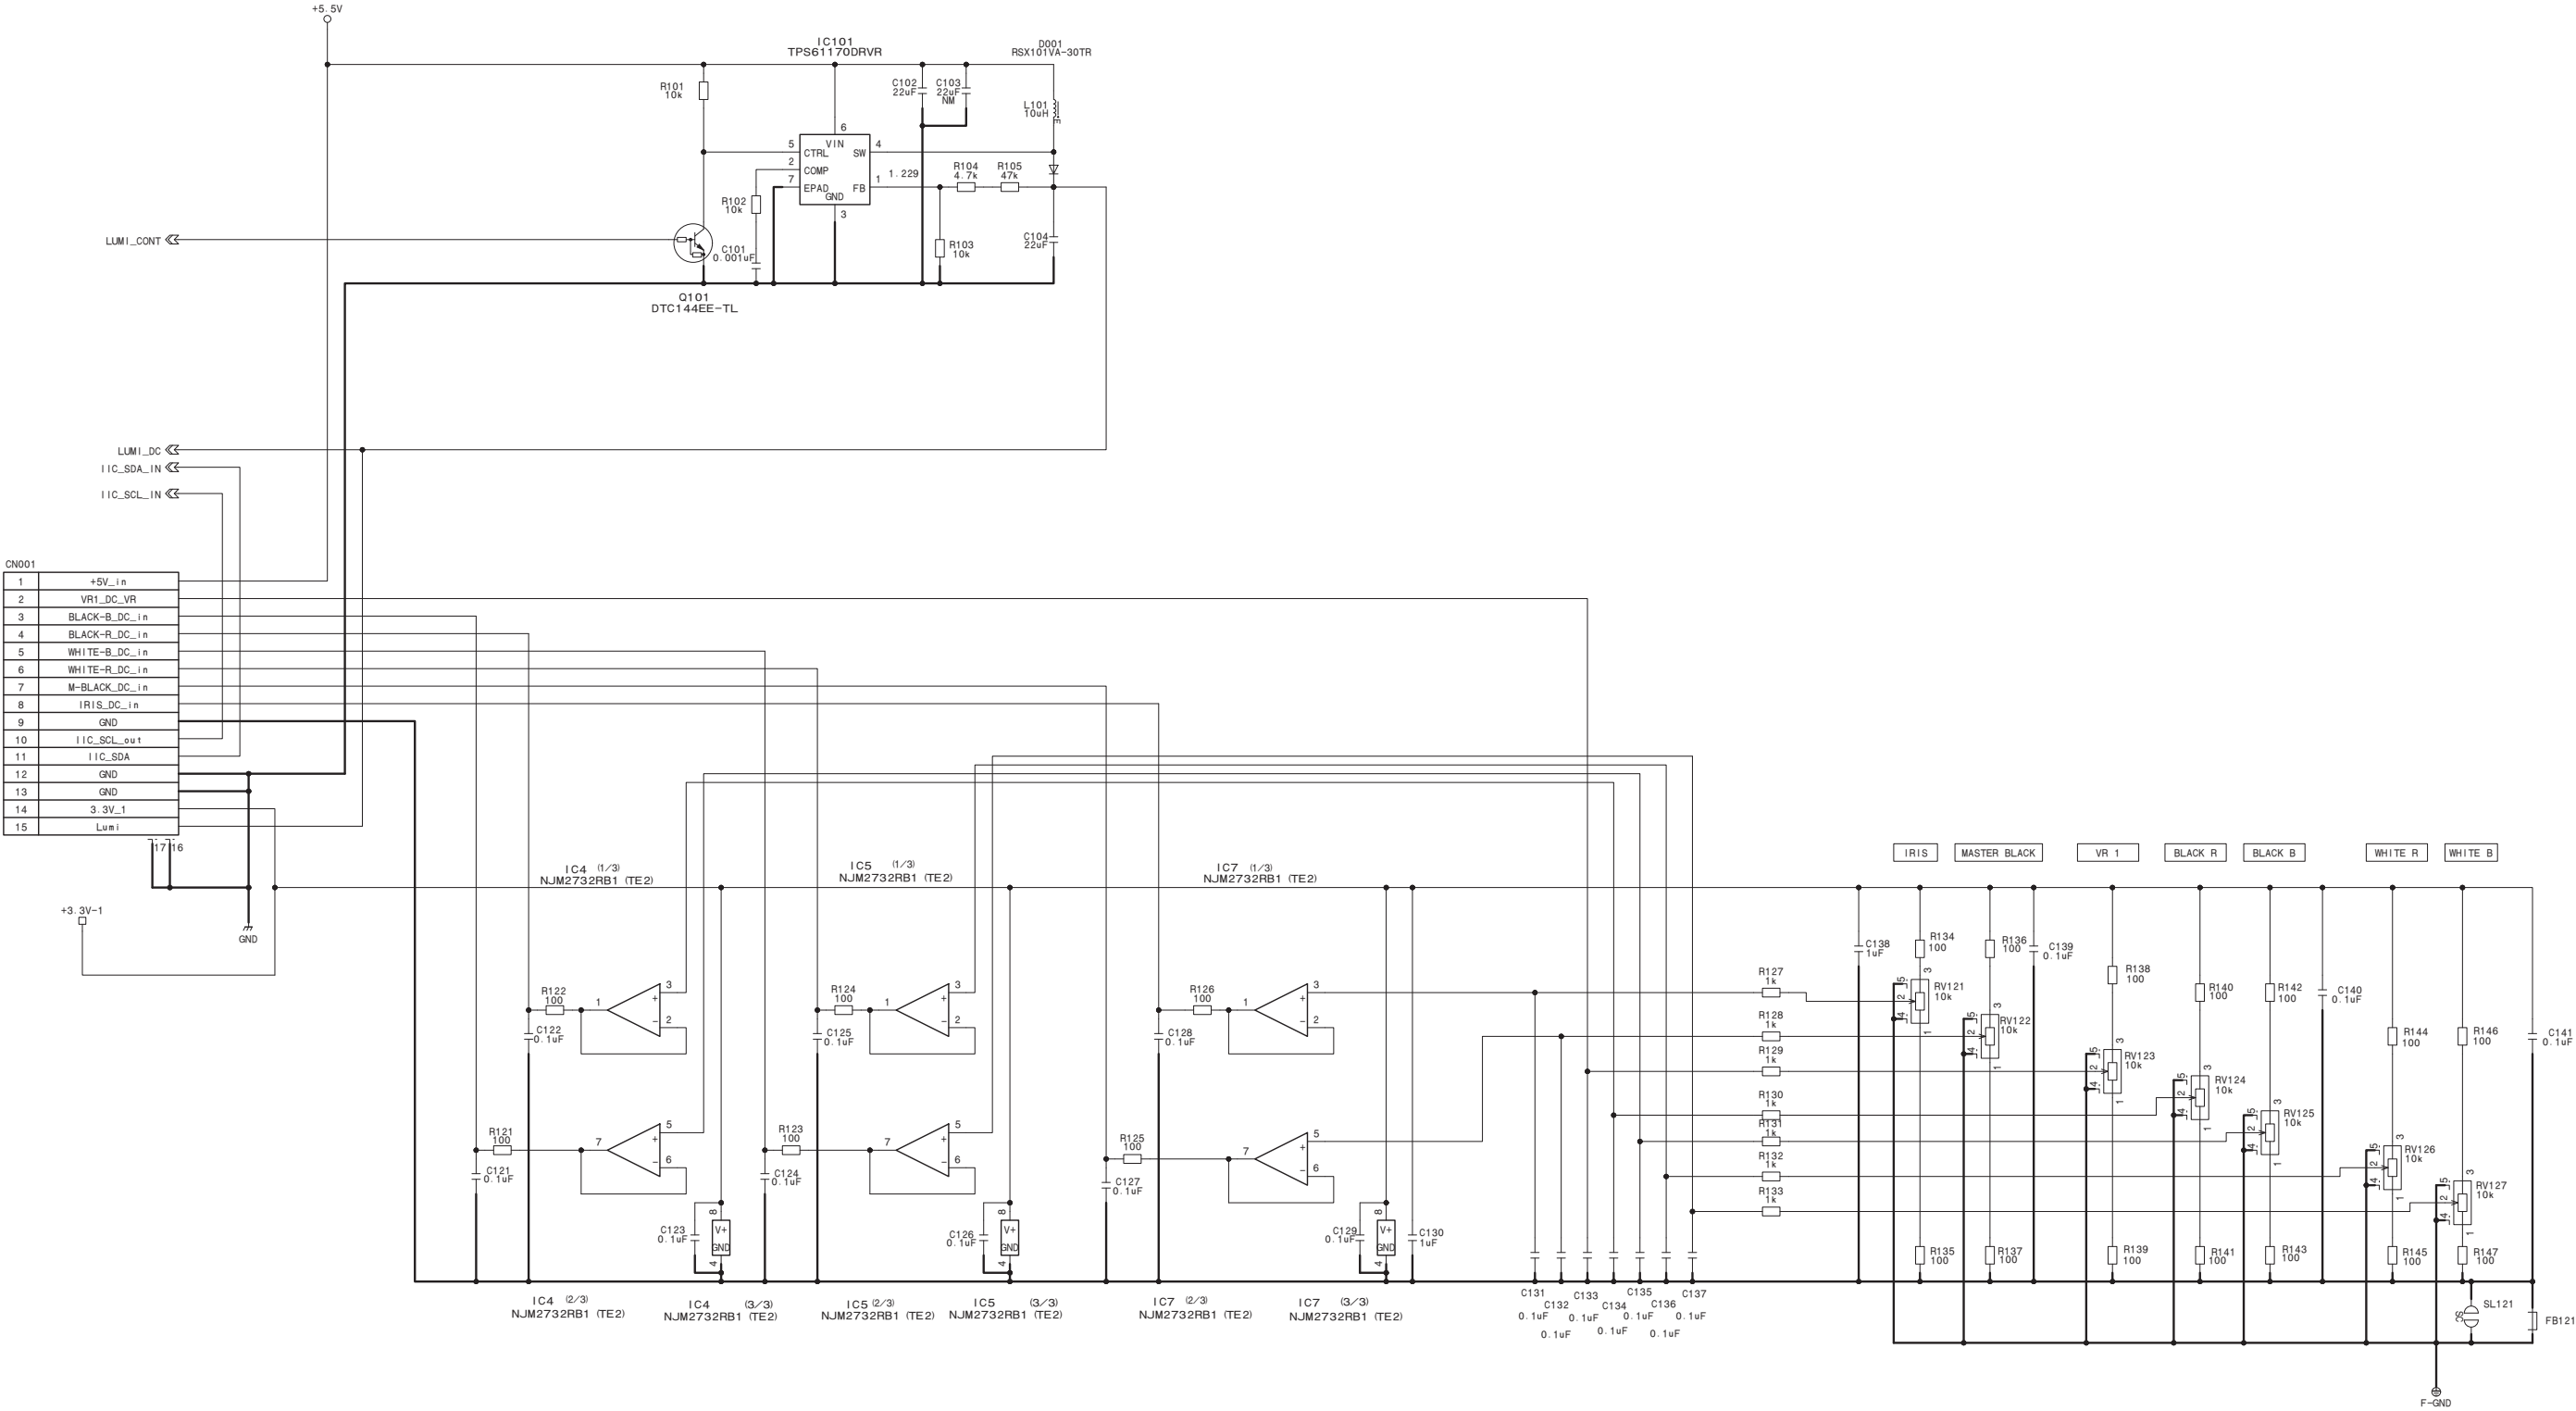


SW-1615 (2/3)
BOARD NO. 1-889-643-11
SW-1615_2

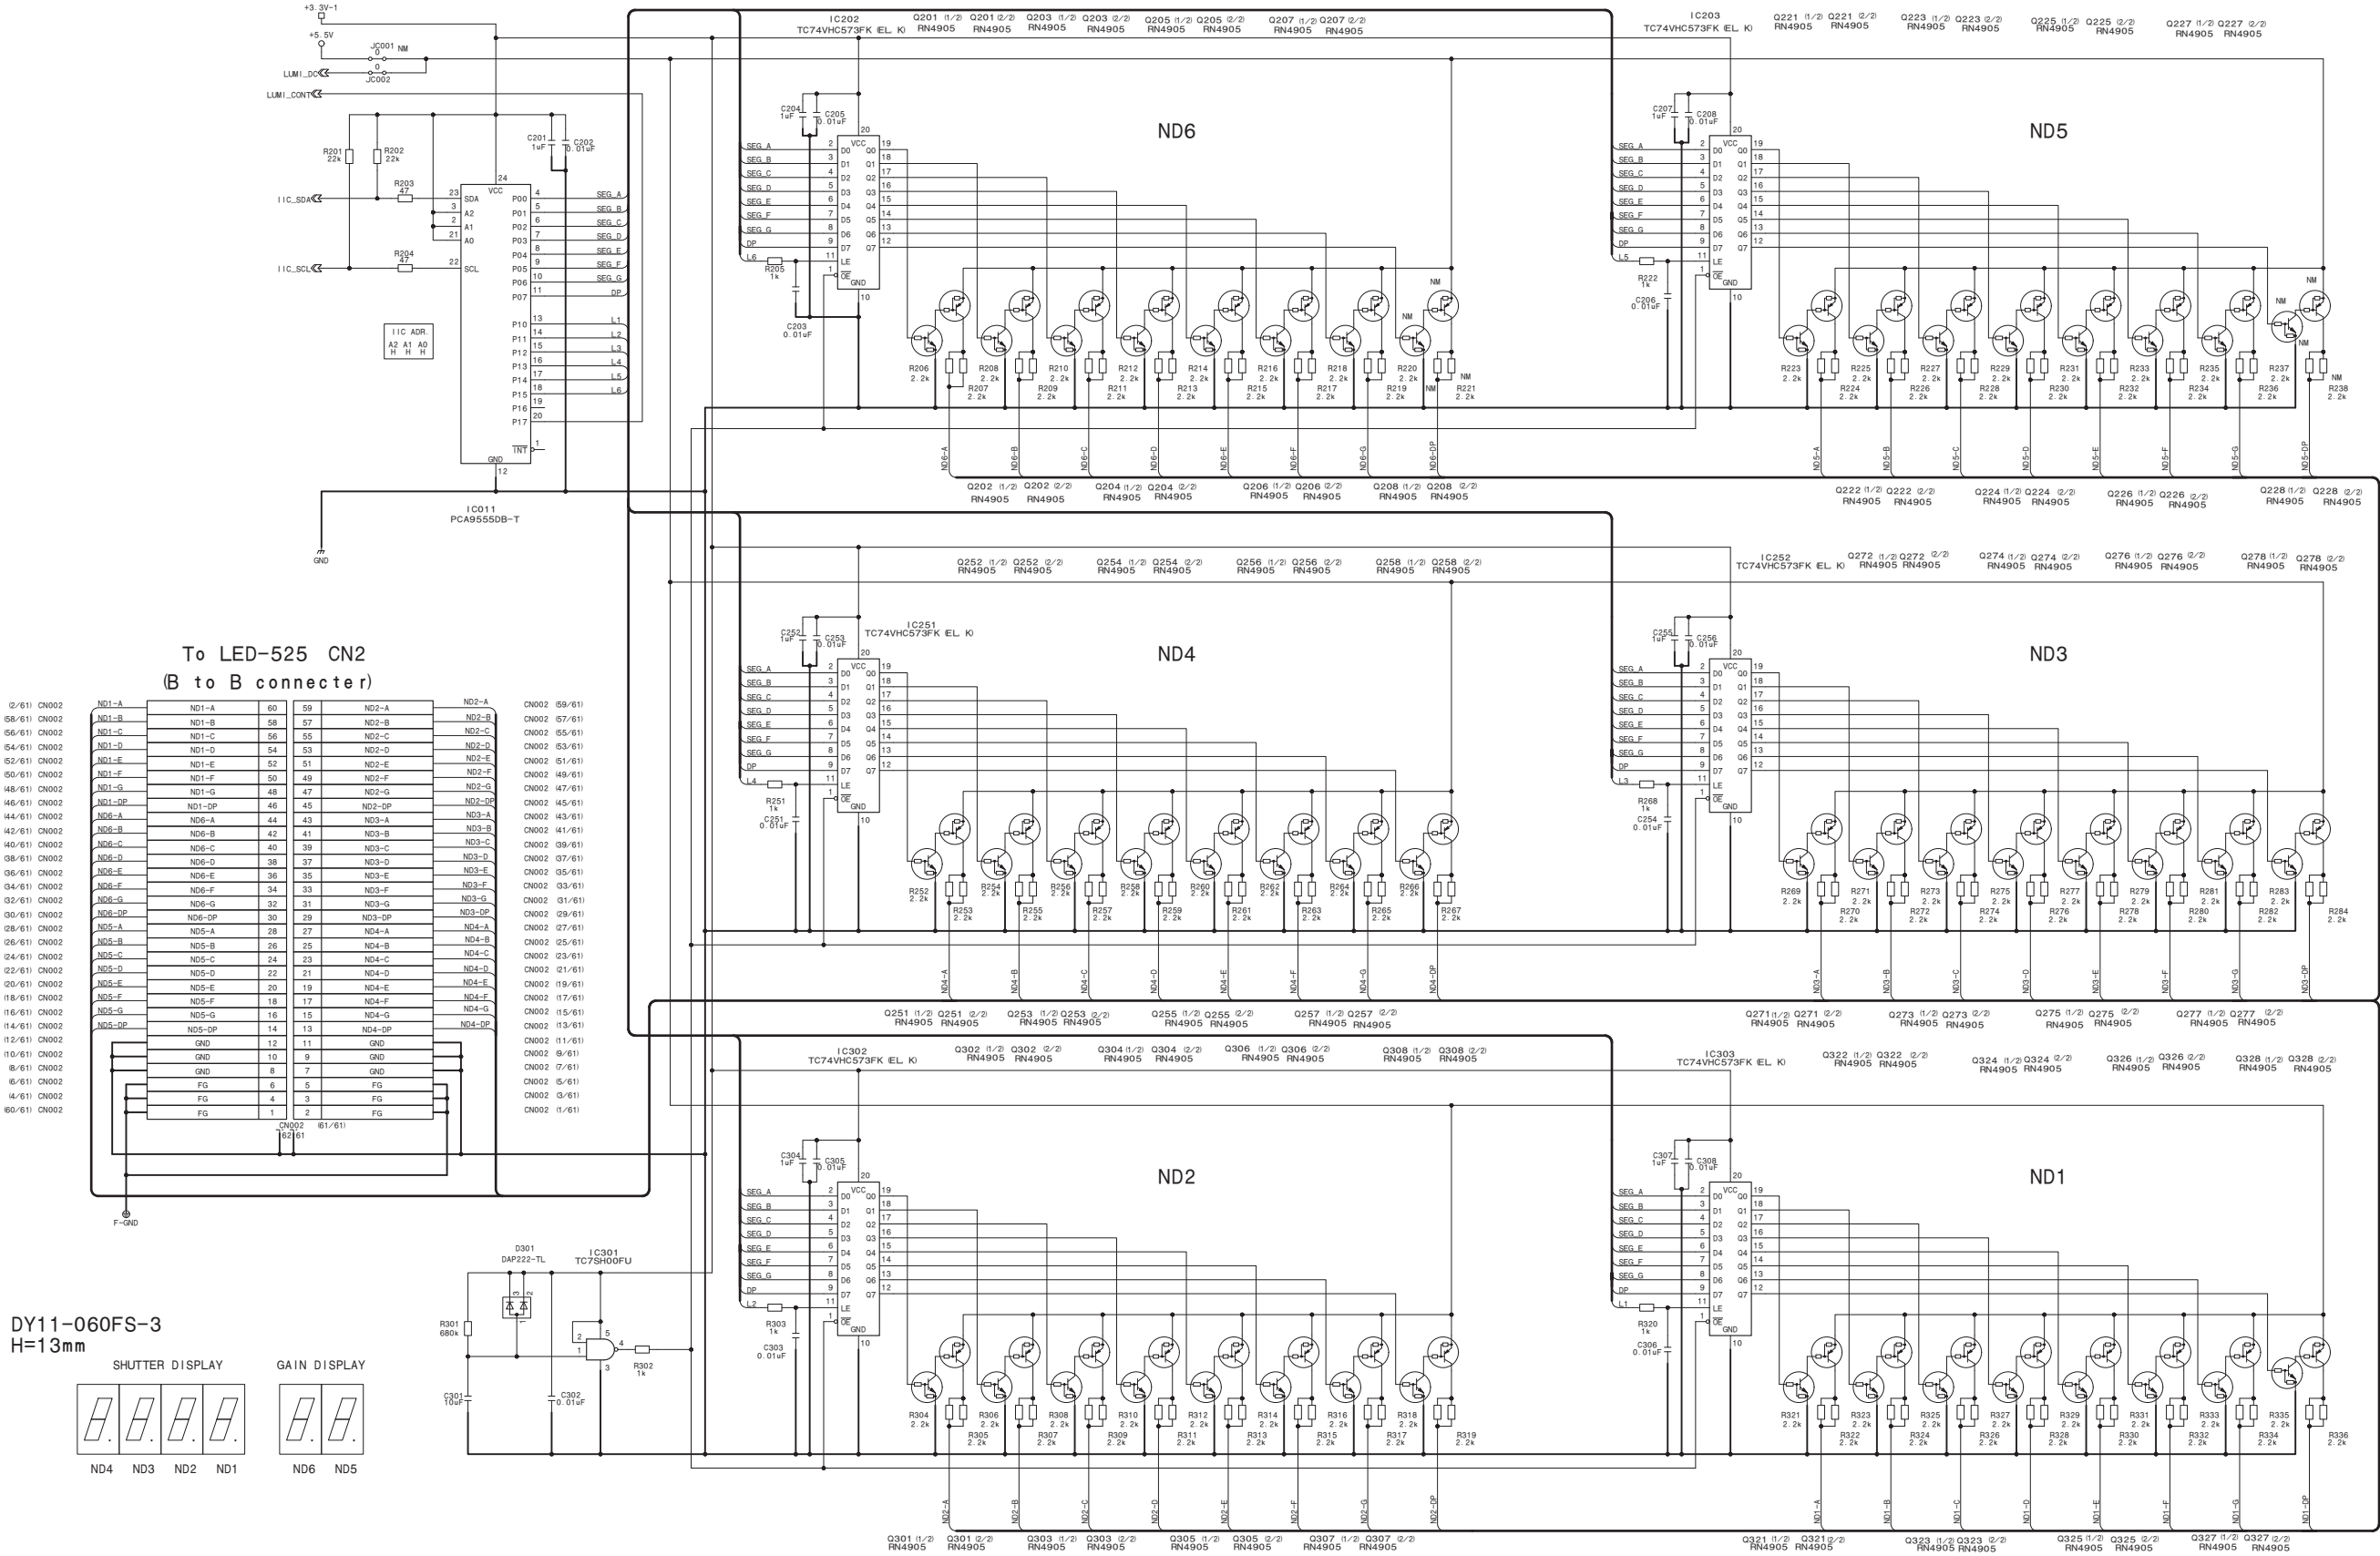


Section 3
Board Layouts

AU-358

The location is described at the end in this section.

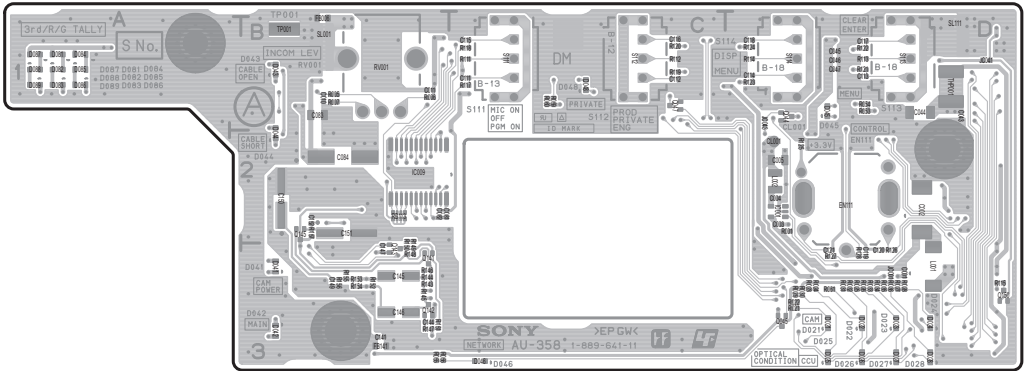


AU-358 -A SIDE-
SUFFIX: -11

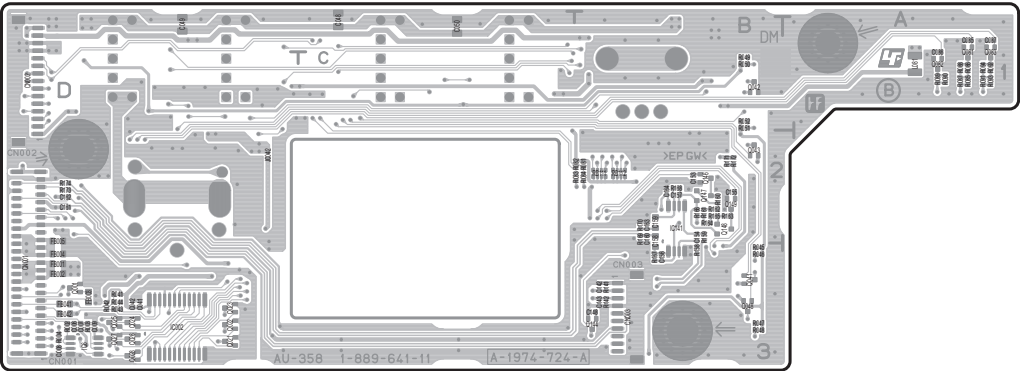


AU-358 -B SIDE-
SUFFIX: -11

CN-3661

The location is described at the end in this section.

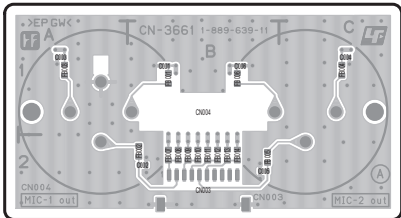


CN-3661 -A SIDE-
SUFFIX: -11

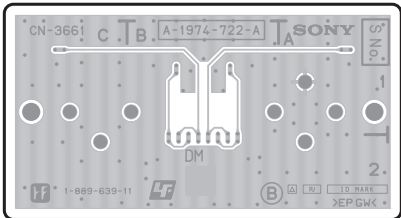


CN-3661 -B SIDE-
SUFFIX: -11

CN-3662

The location is described at the end in this section.

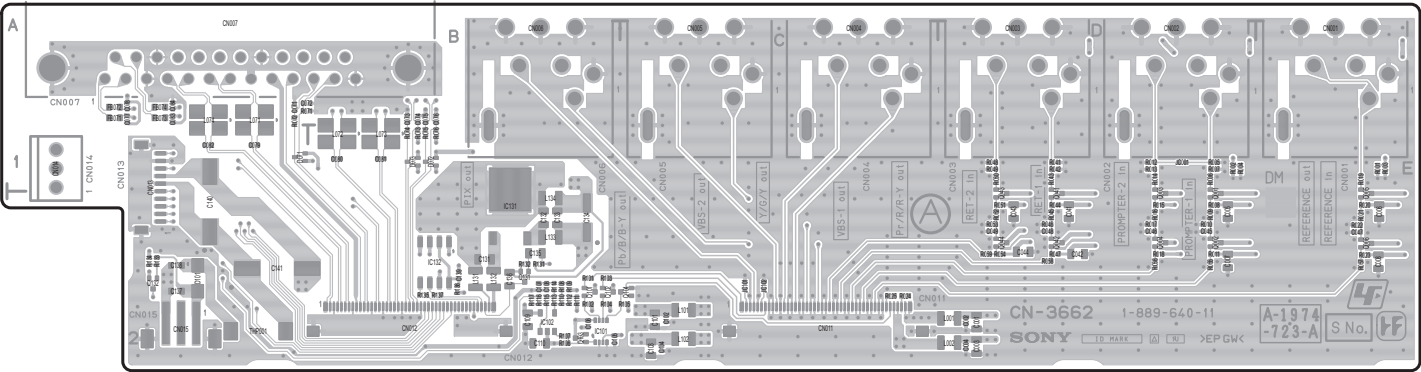


CN-3662 -A SIDE-
SUFFIX: -11

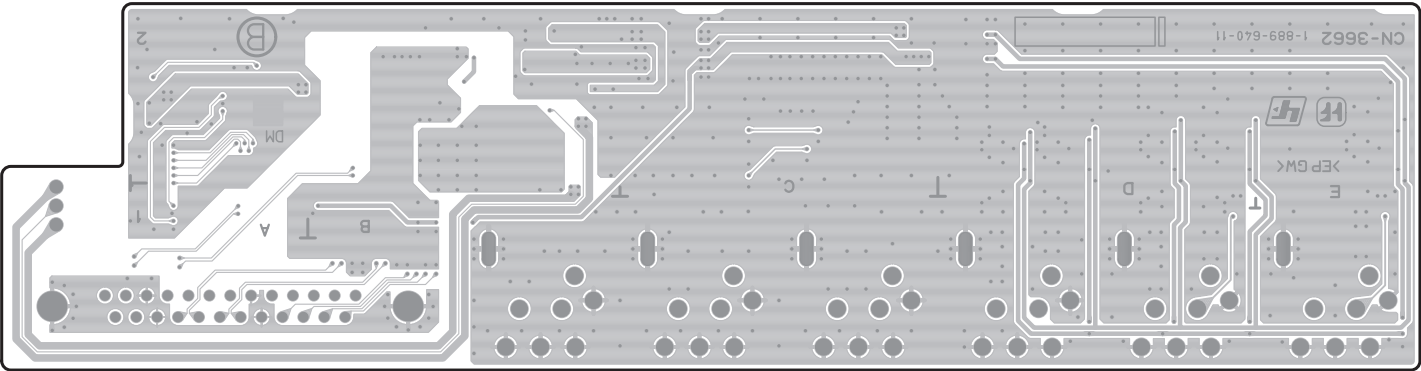


CN-3662 -B SIDE-
SUFFIX: -11

CN-3663




CN-3663 -A SIDE-
SUFFIX: -11




CN-3663 -B SIDE-
SUFFIX: -11

CN-3664




CN-3664 -A SIDE-
SUFFIX: -11




CN-3664 -B SIDE-
SUFFIX: -11

The location is described at the end in this section.




The location is described at the end in this section.

The location is described at the end in this section.

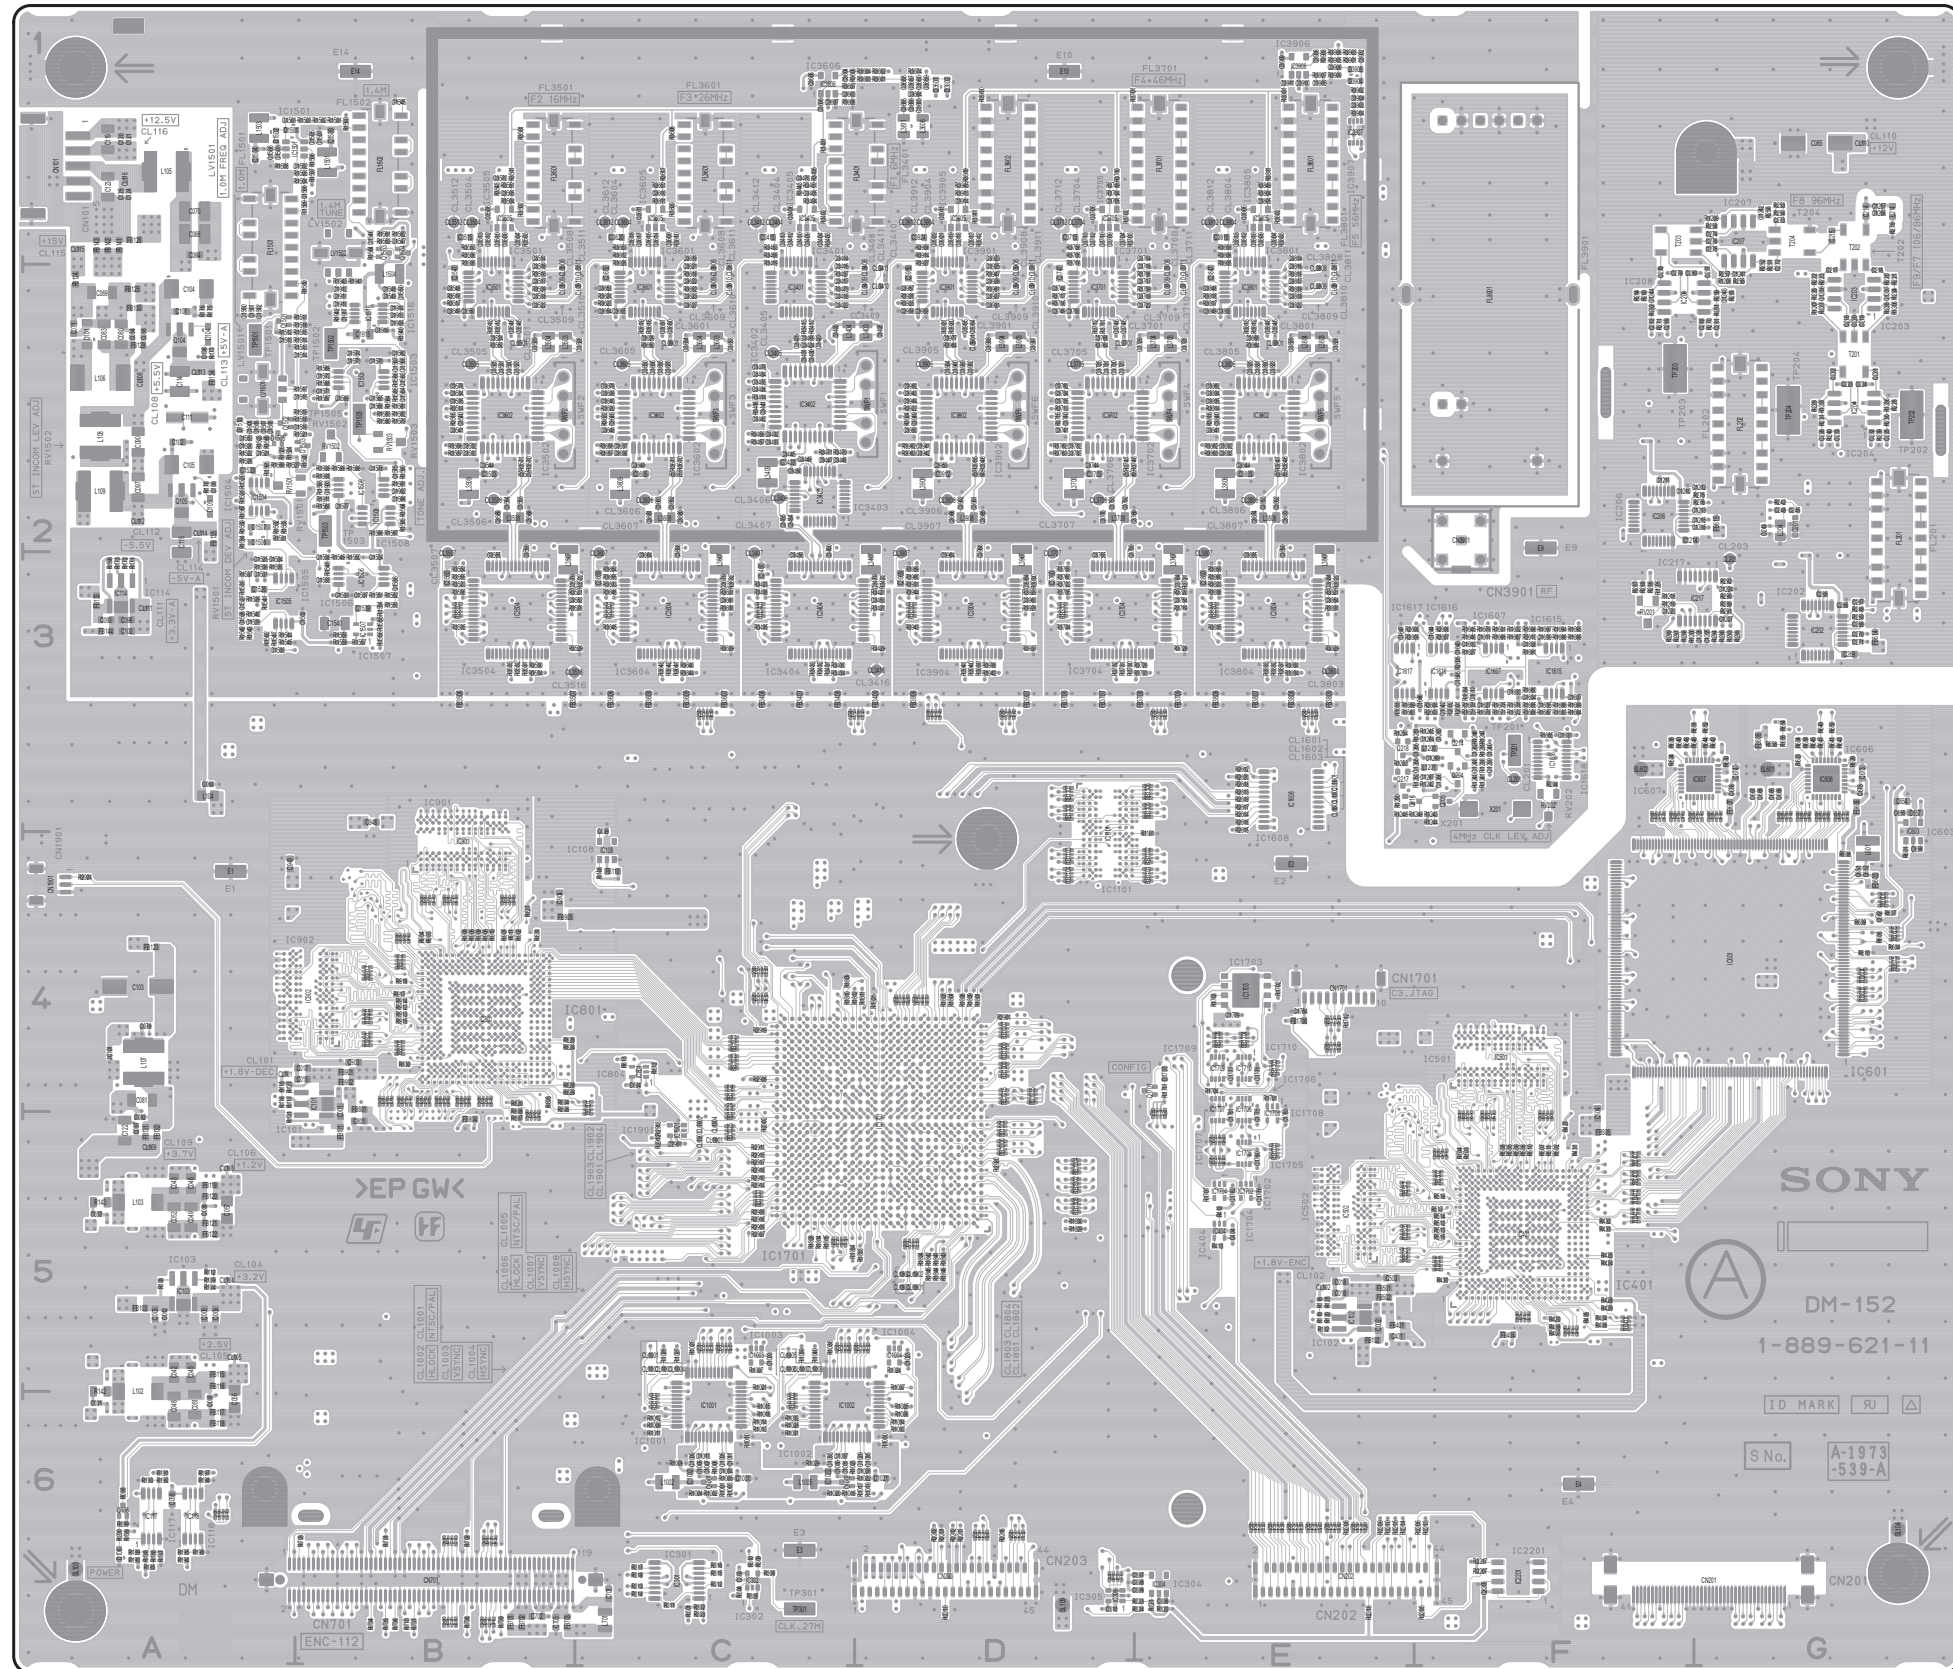


DM-152 -A SIDE-SUFFIX: -11

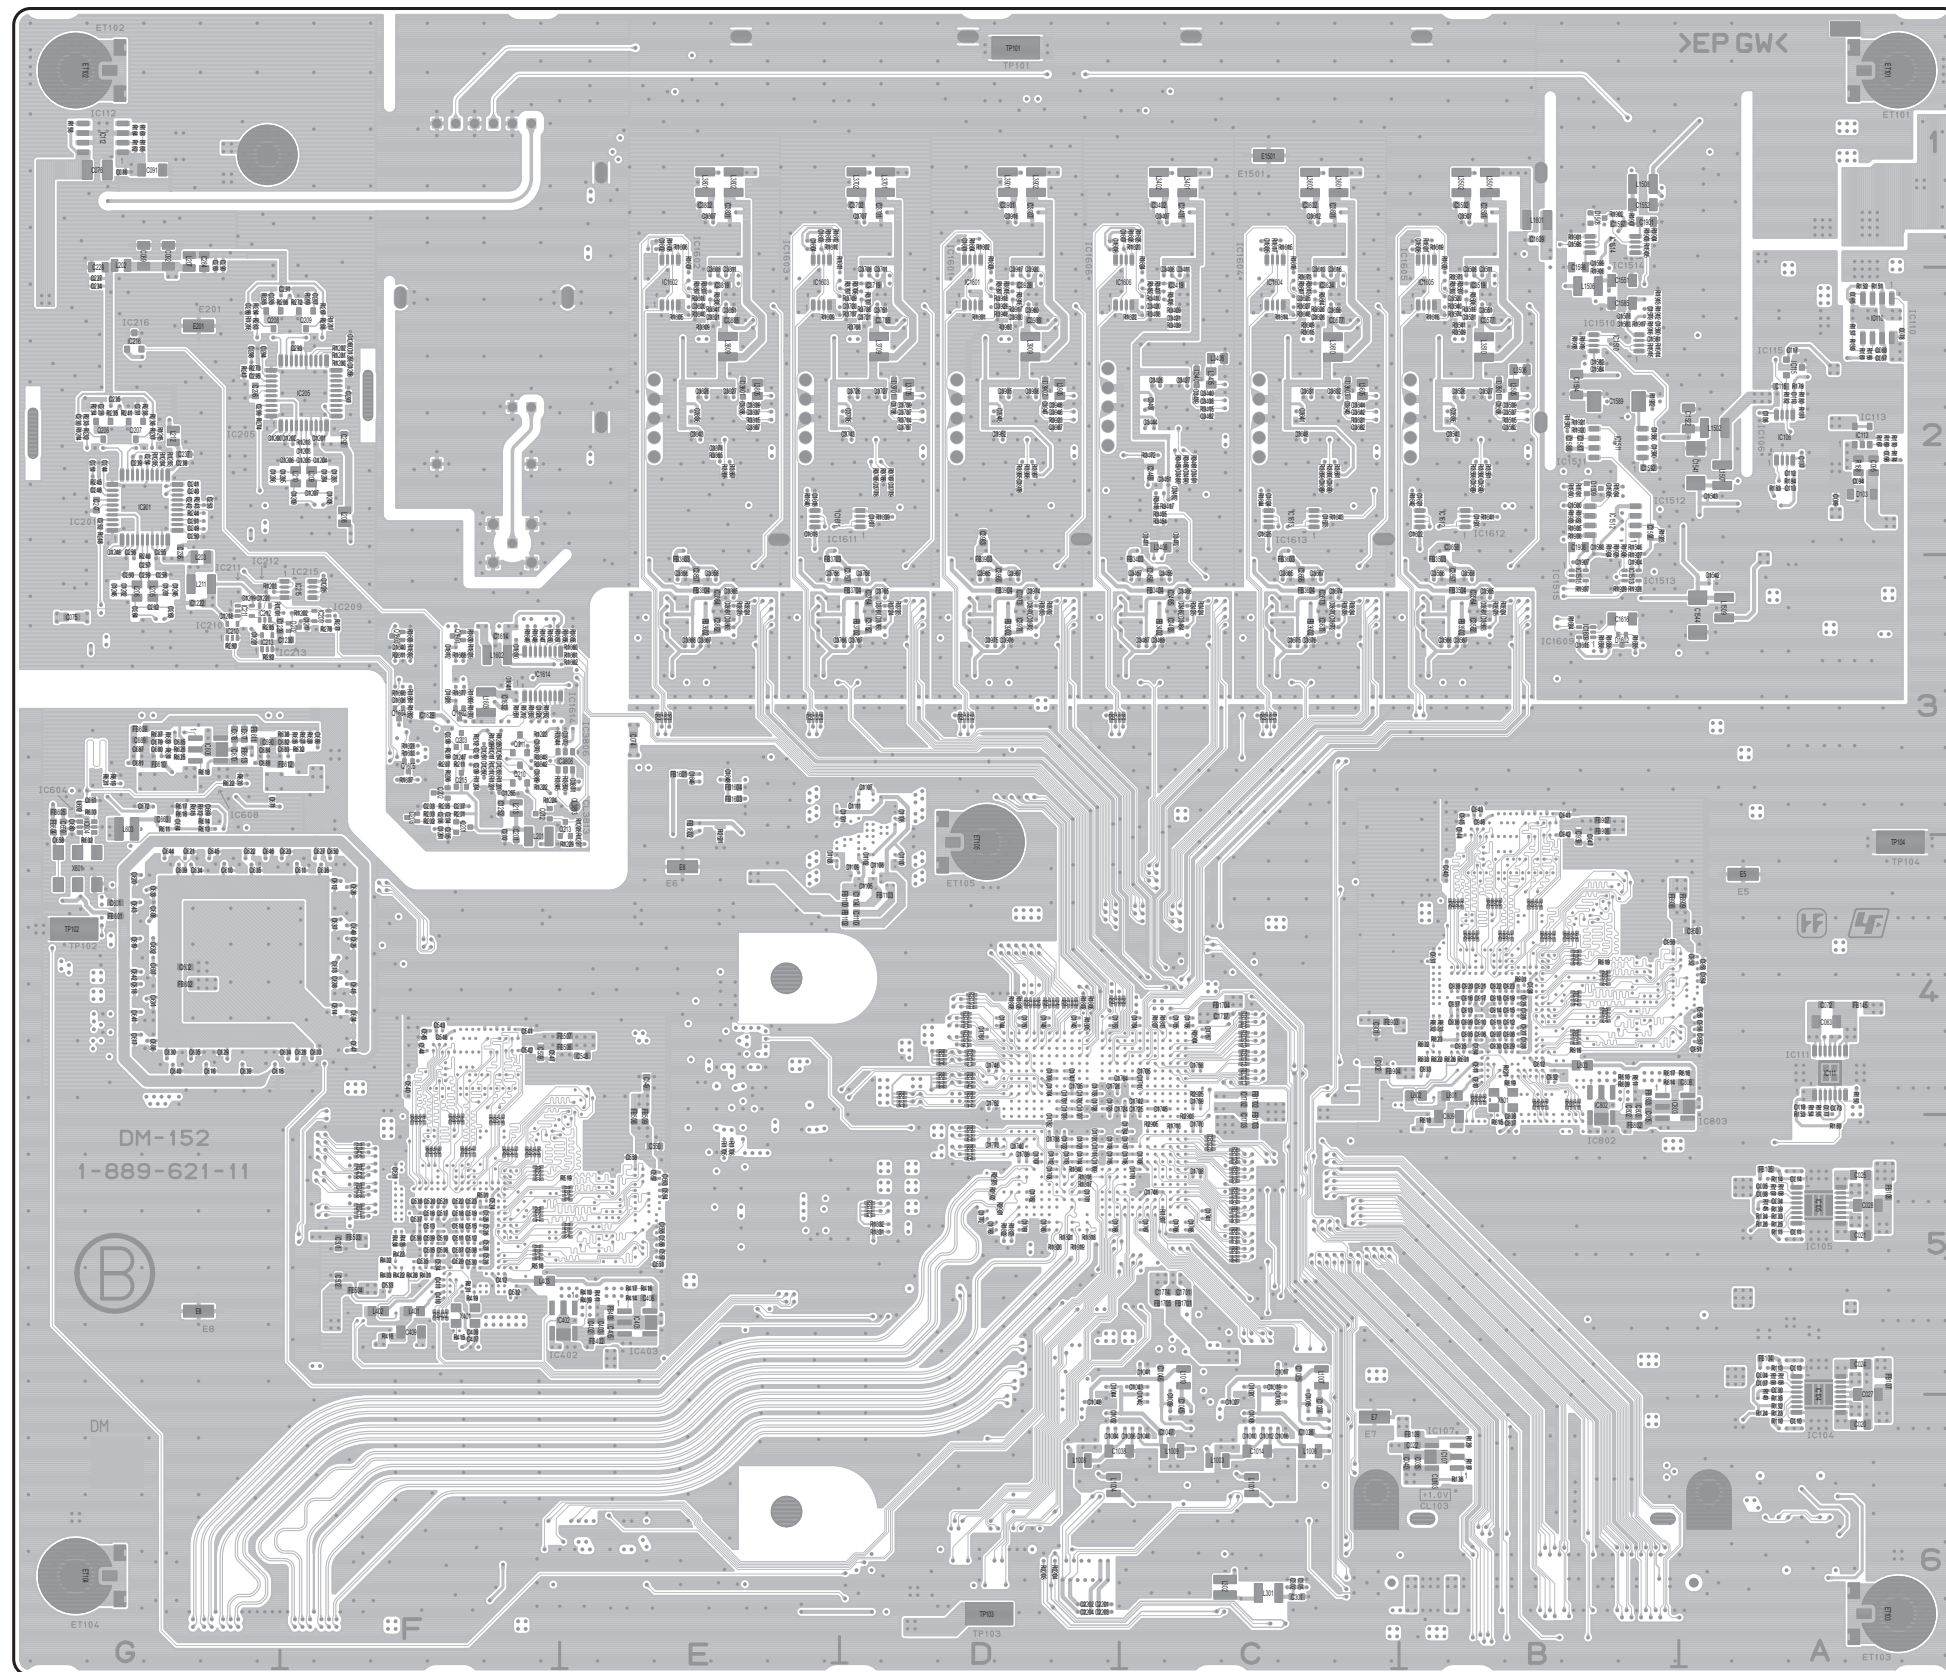


DM-152 -B SIDE-
SUFFIX: -11

DPR-361 [SUFFIX -11]
The location is described at the end in this section.

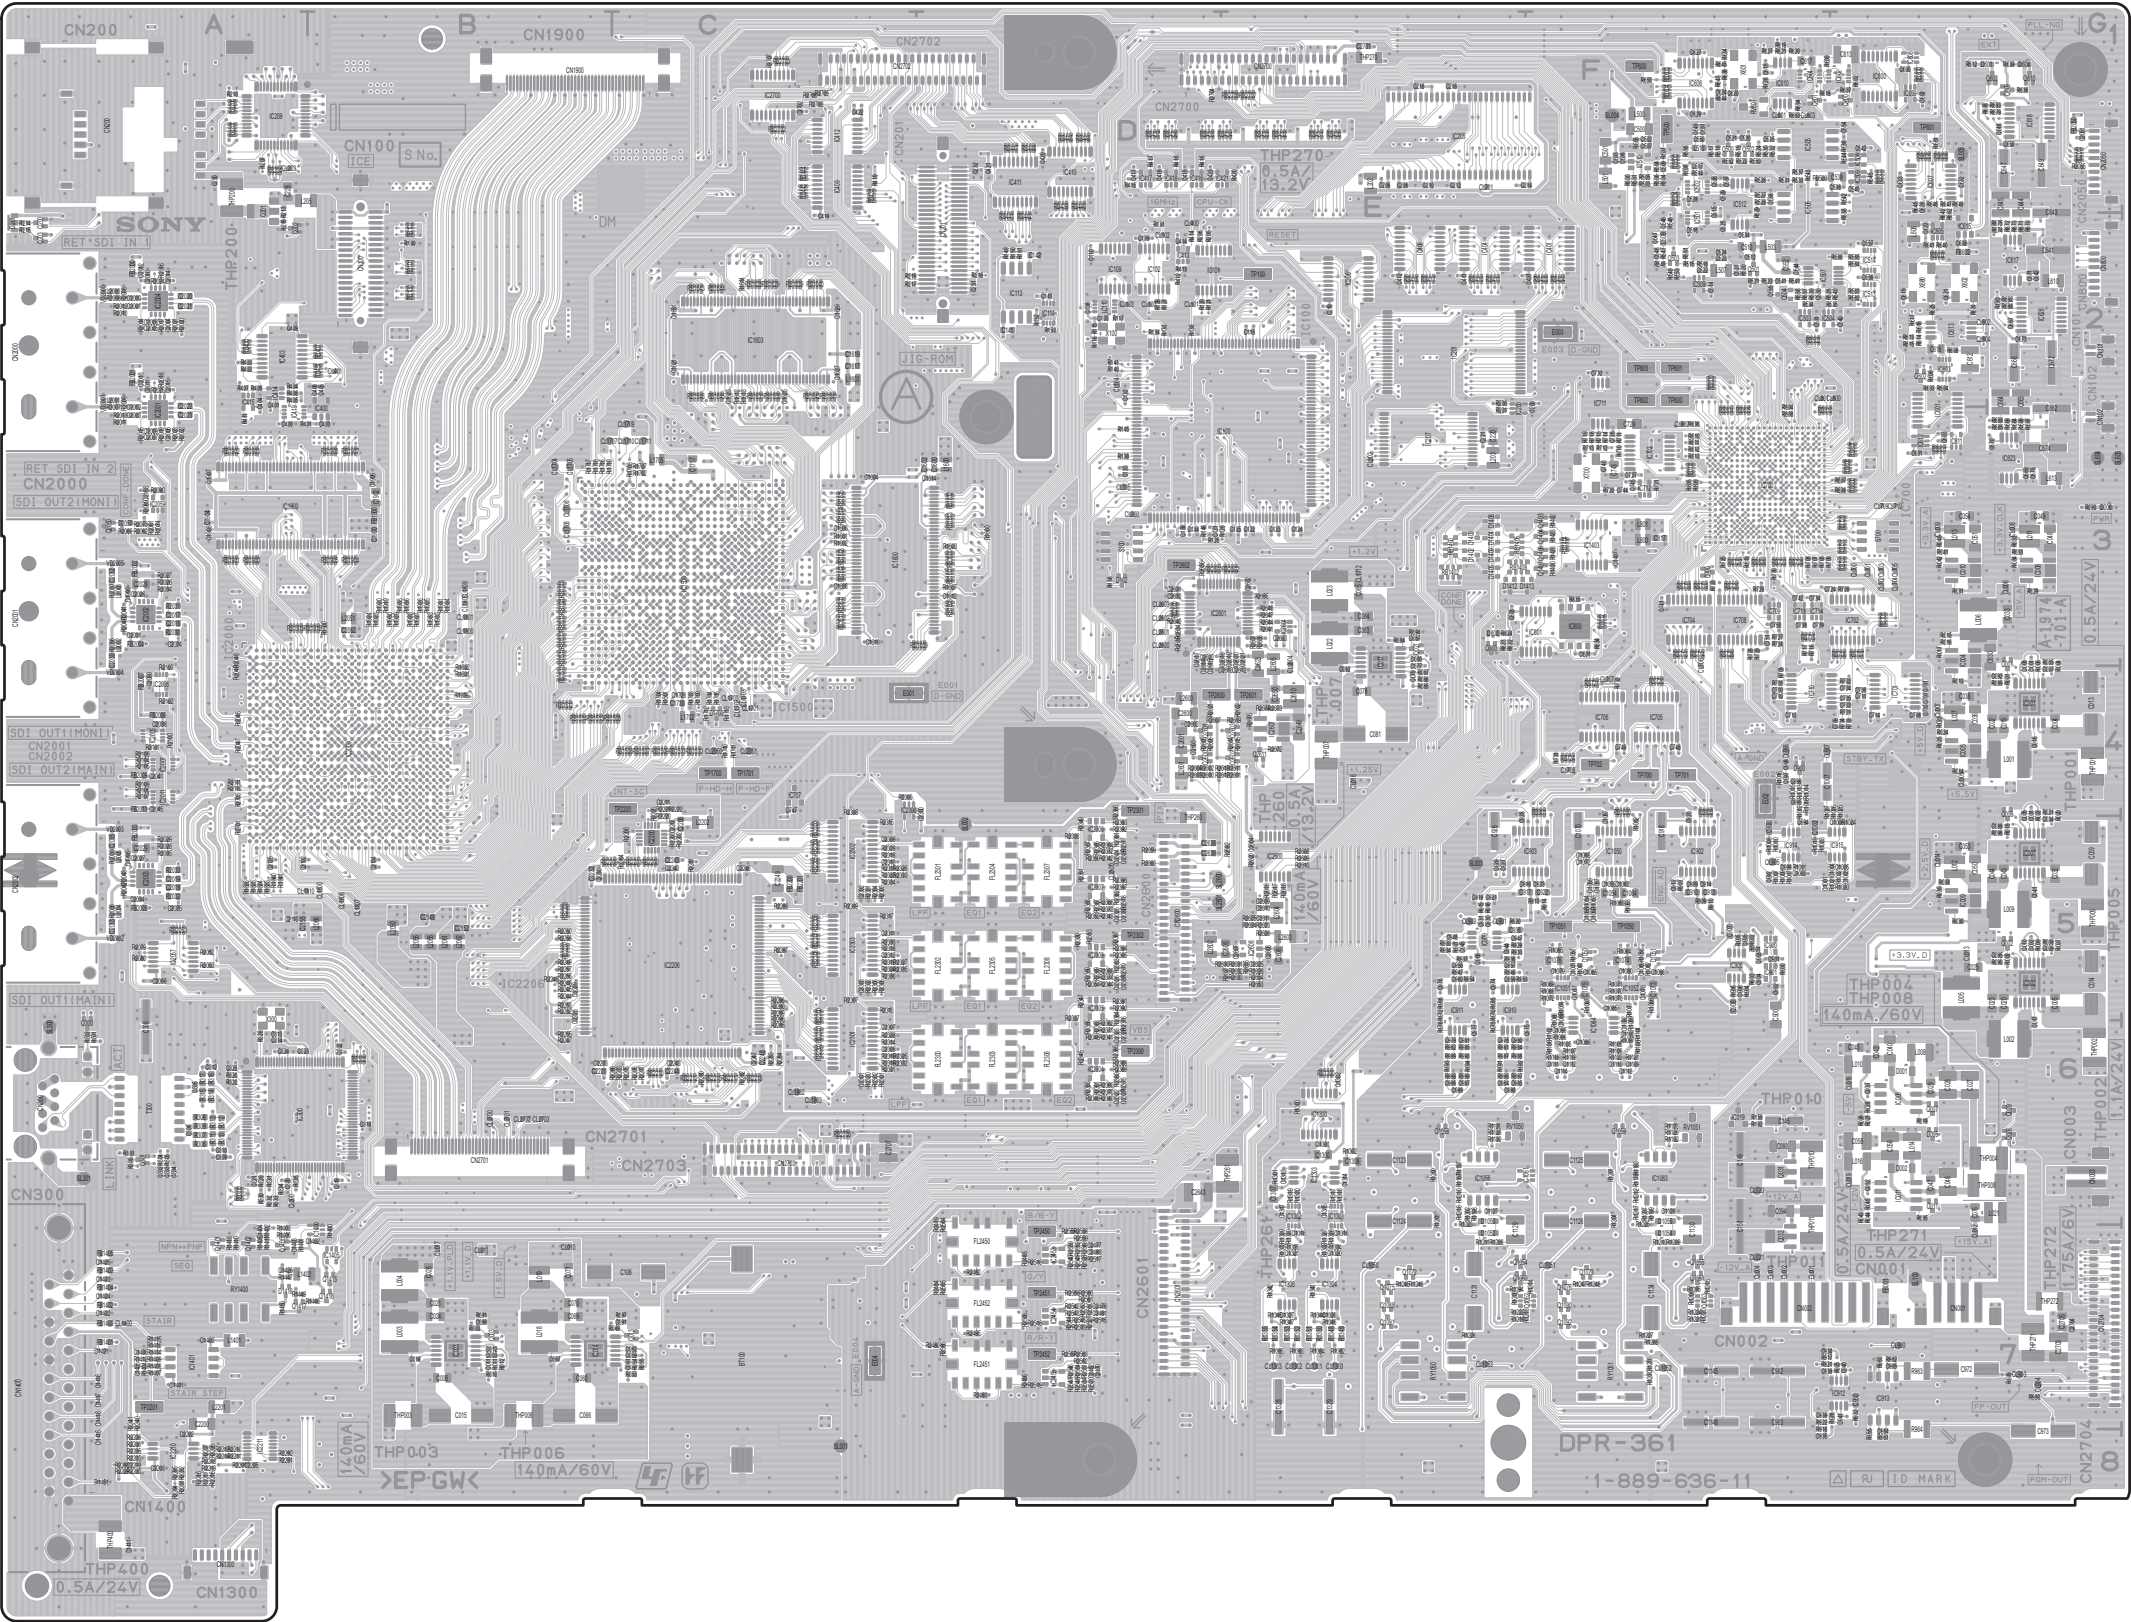


DPR-361 -A SIDE-
SUFFIX: -11

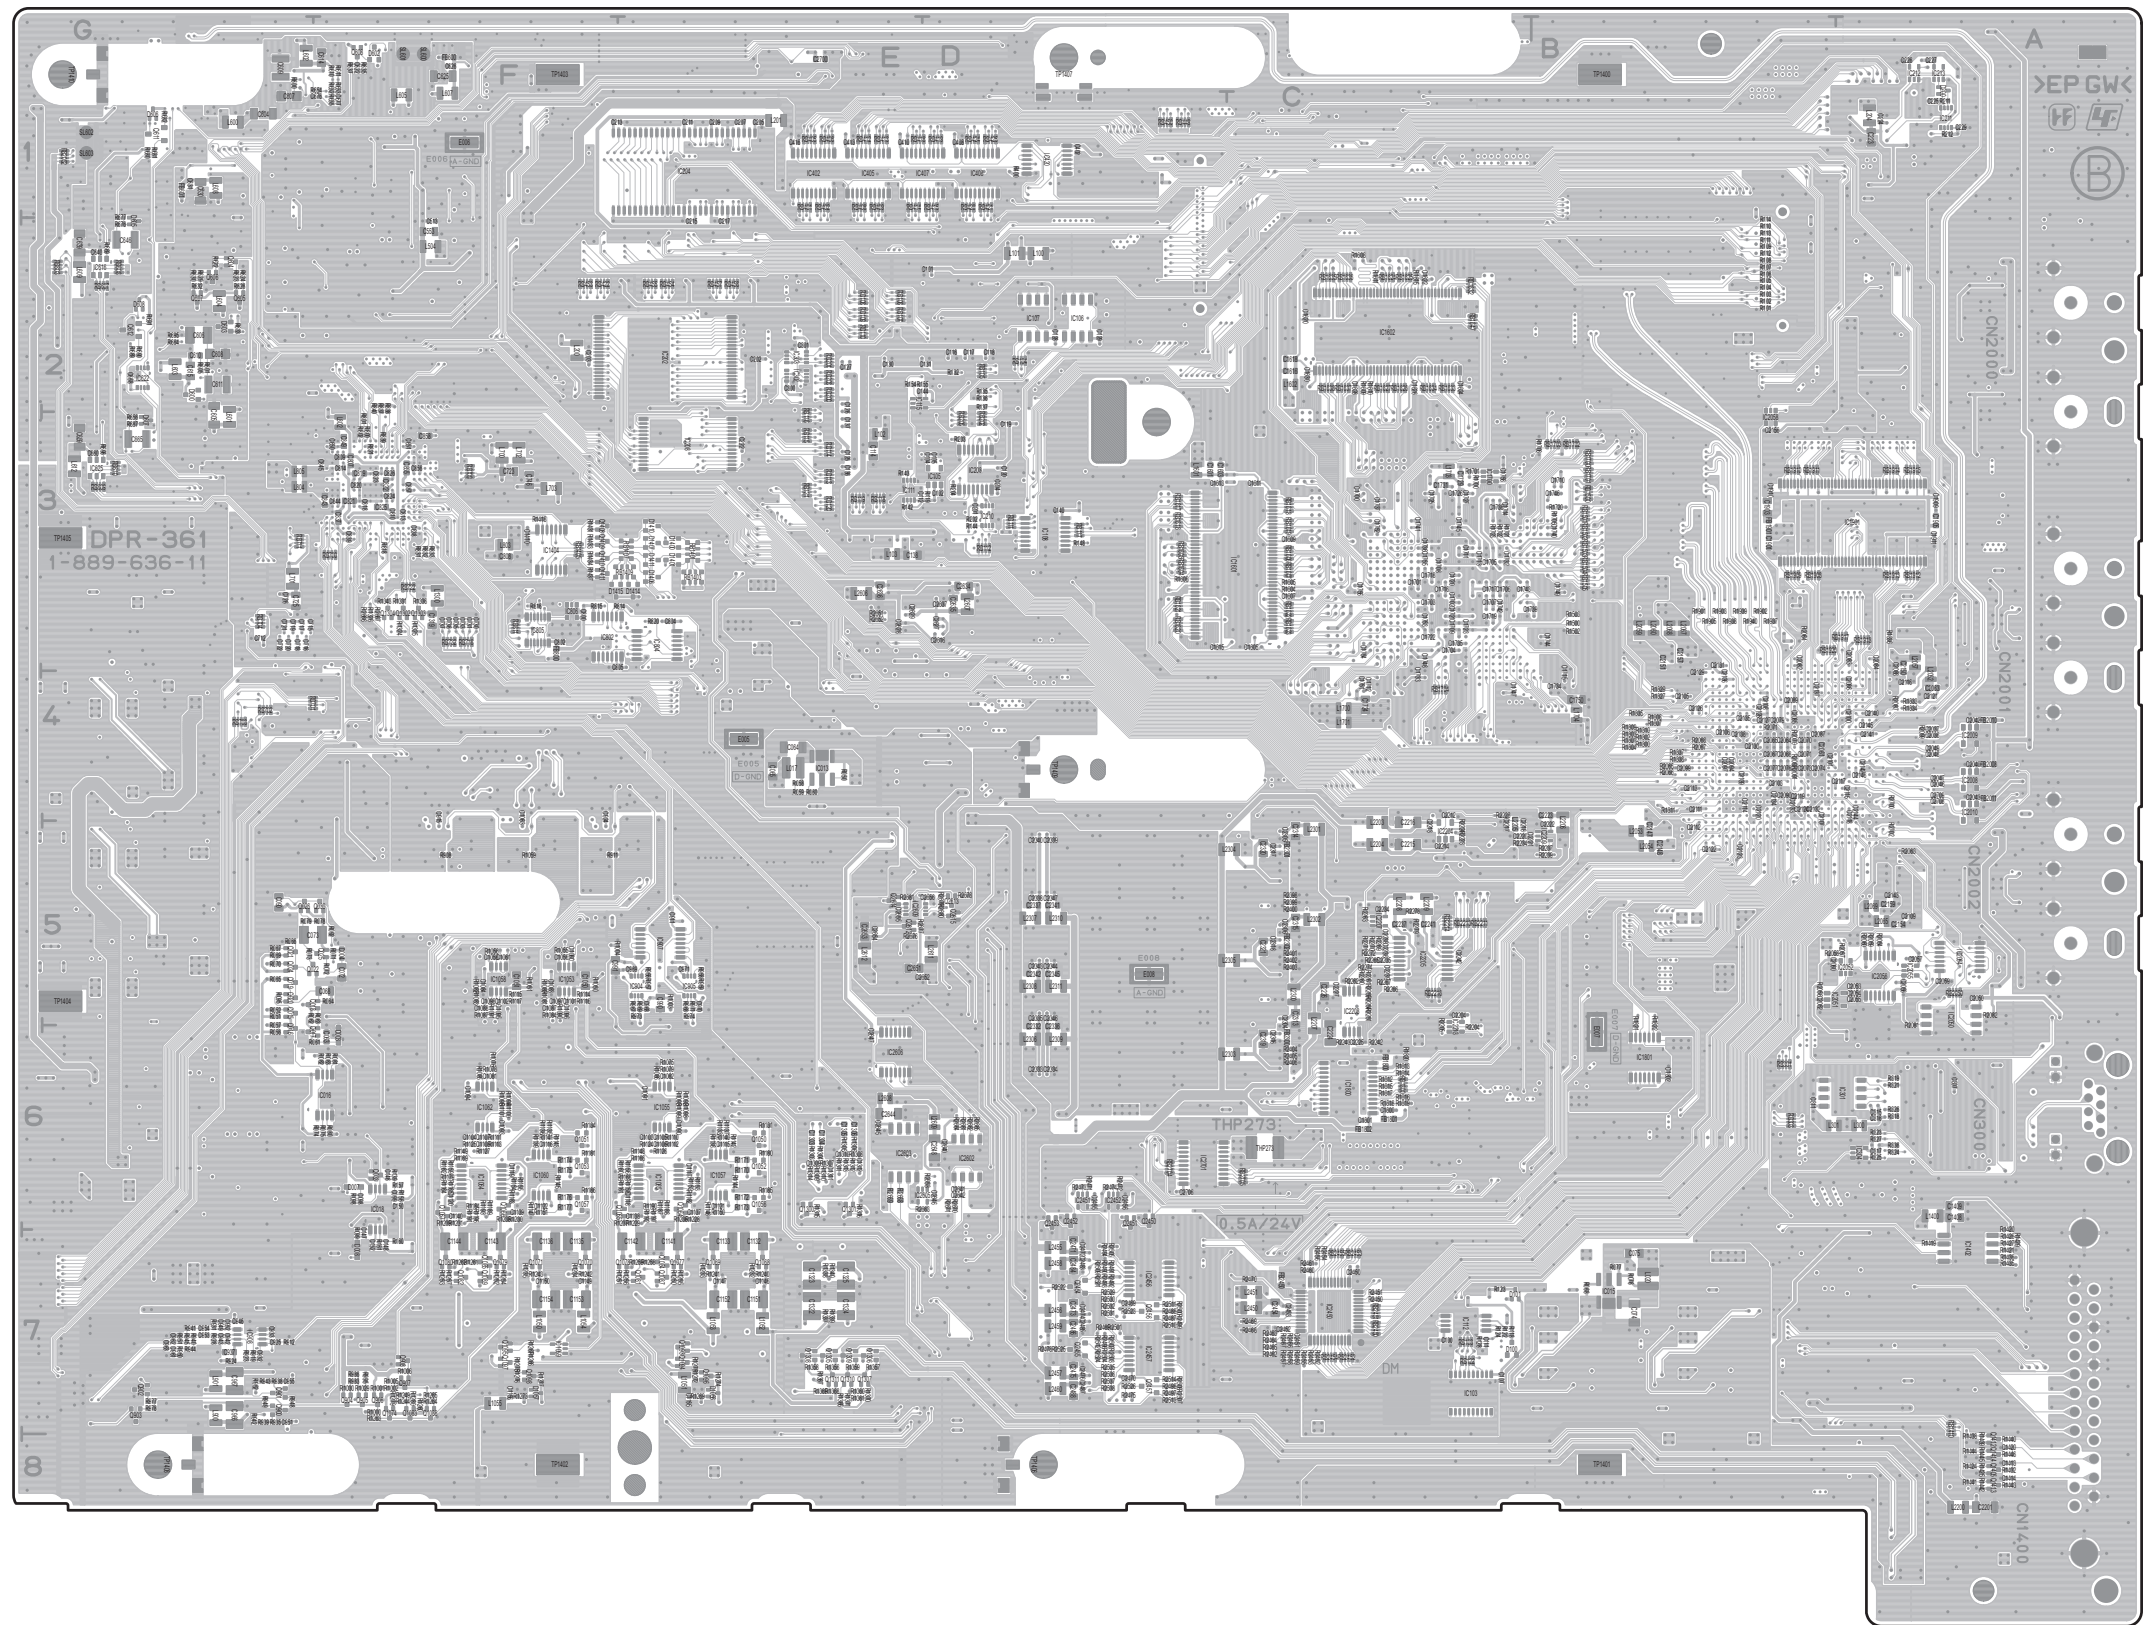


DPR-361 -B SIDE-
SUFFIX: -11

DPR-361 [SUFFIX -12]

The location is described at the end in this section.


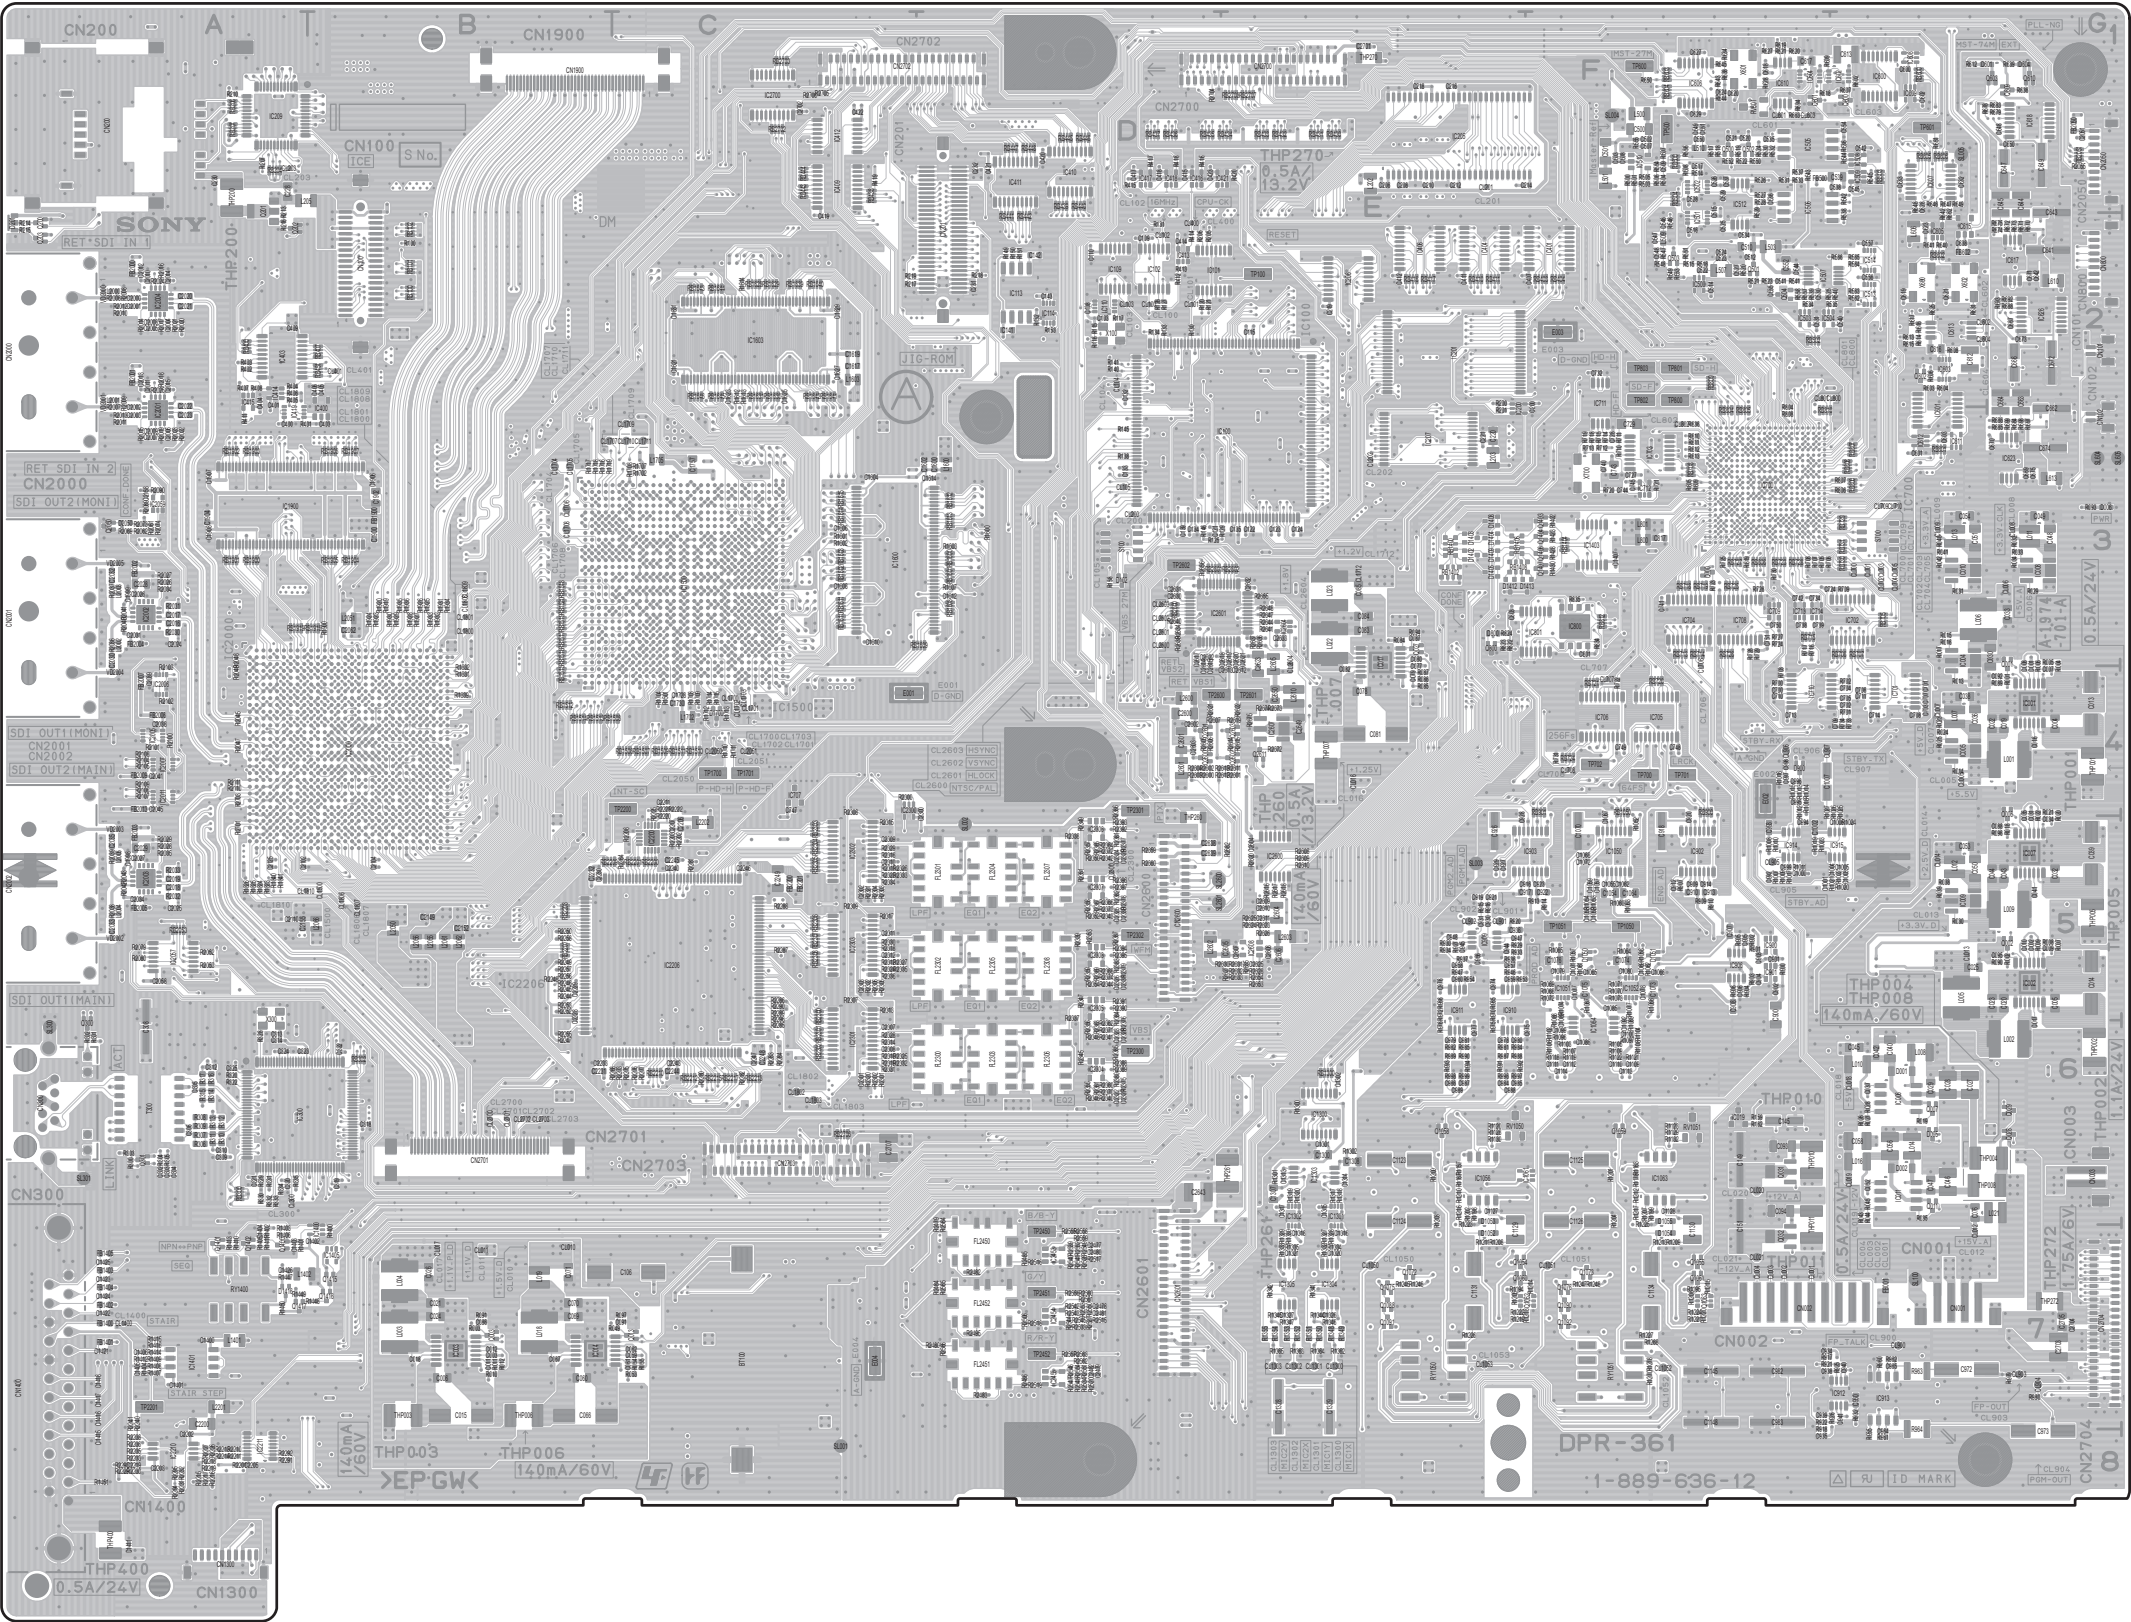


DPR-361 -A SIDE-
SUFFIX: -12

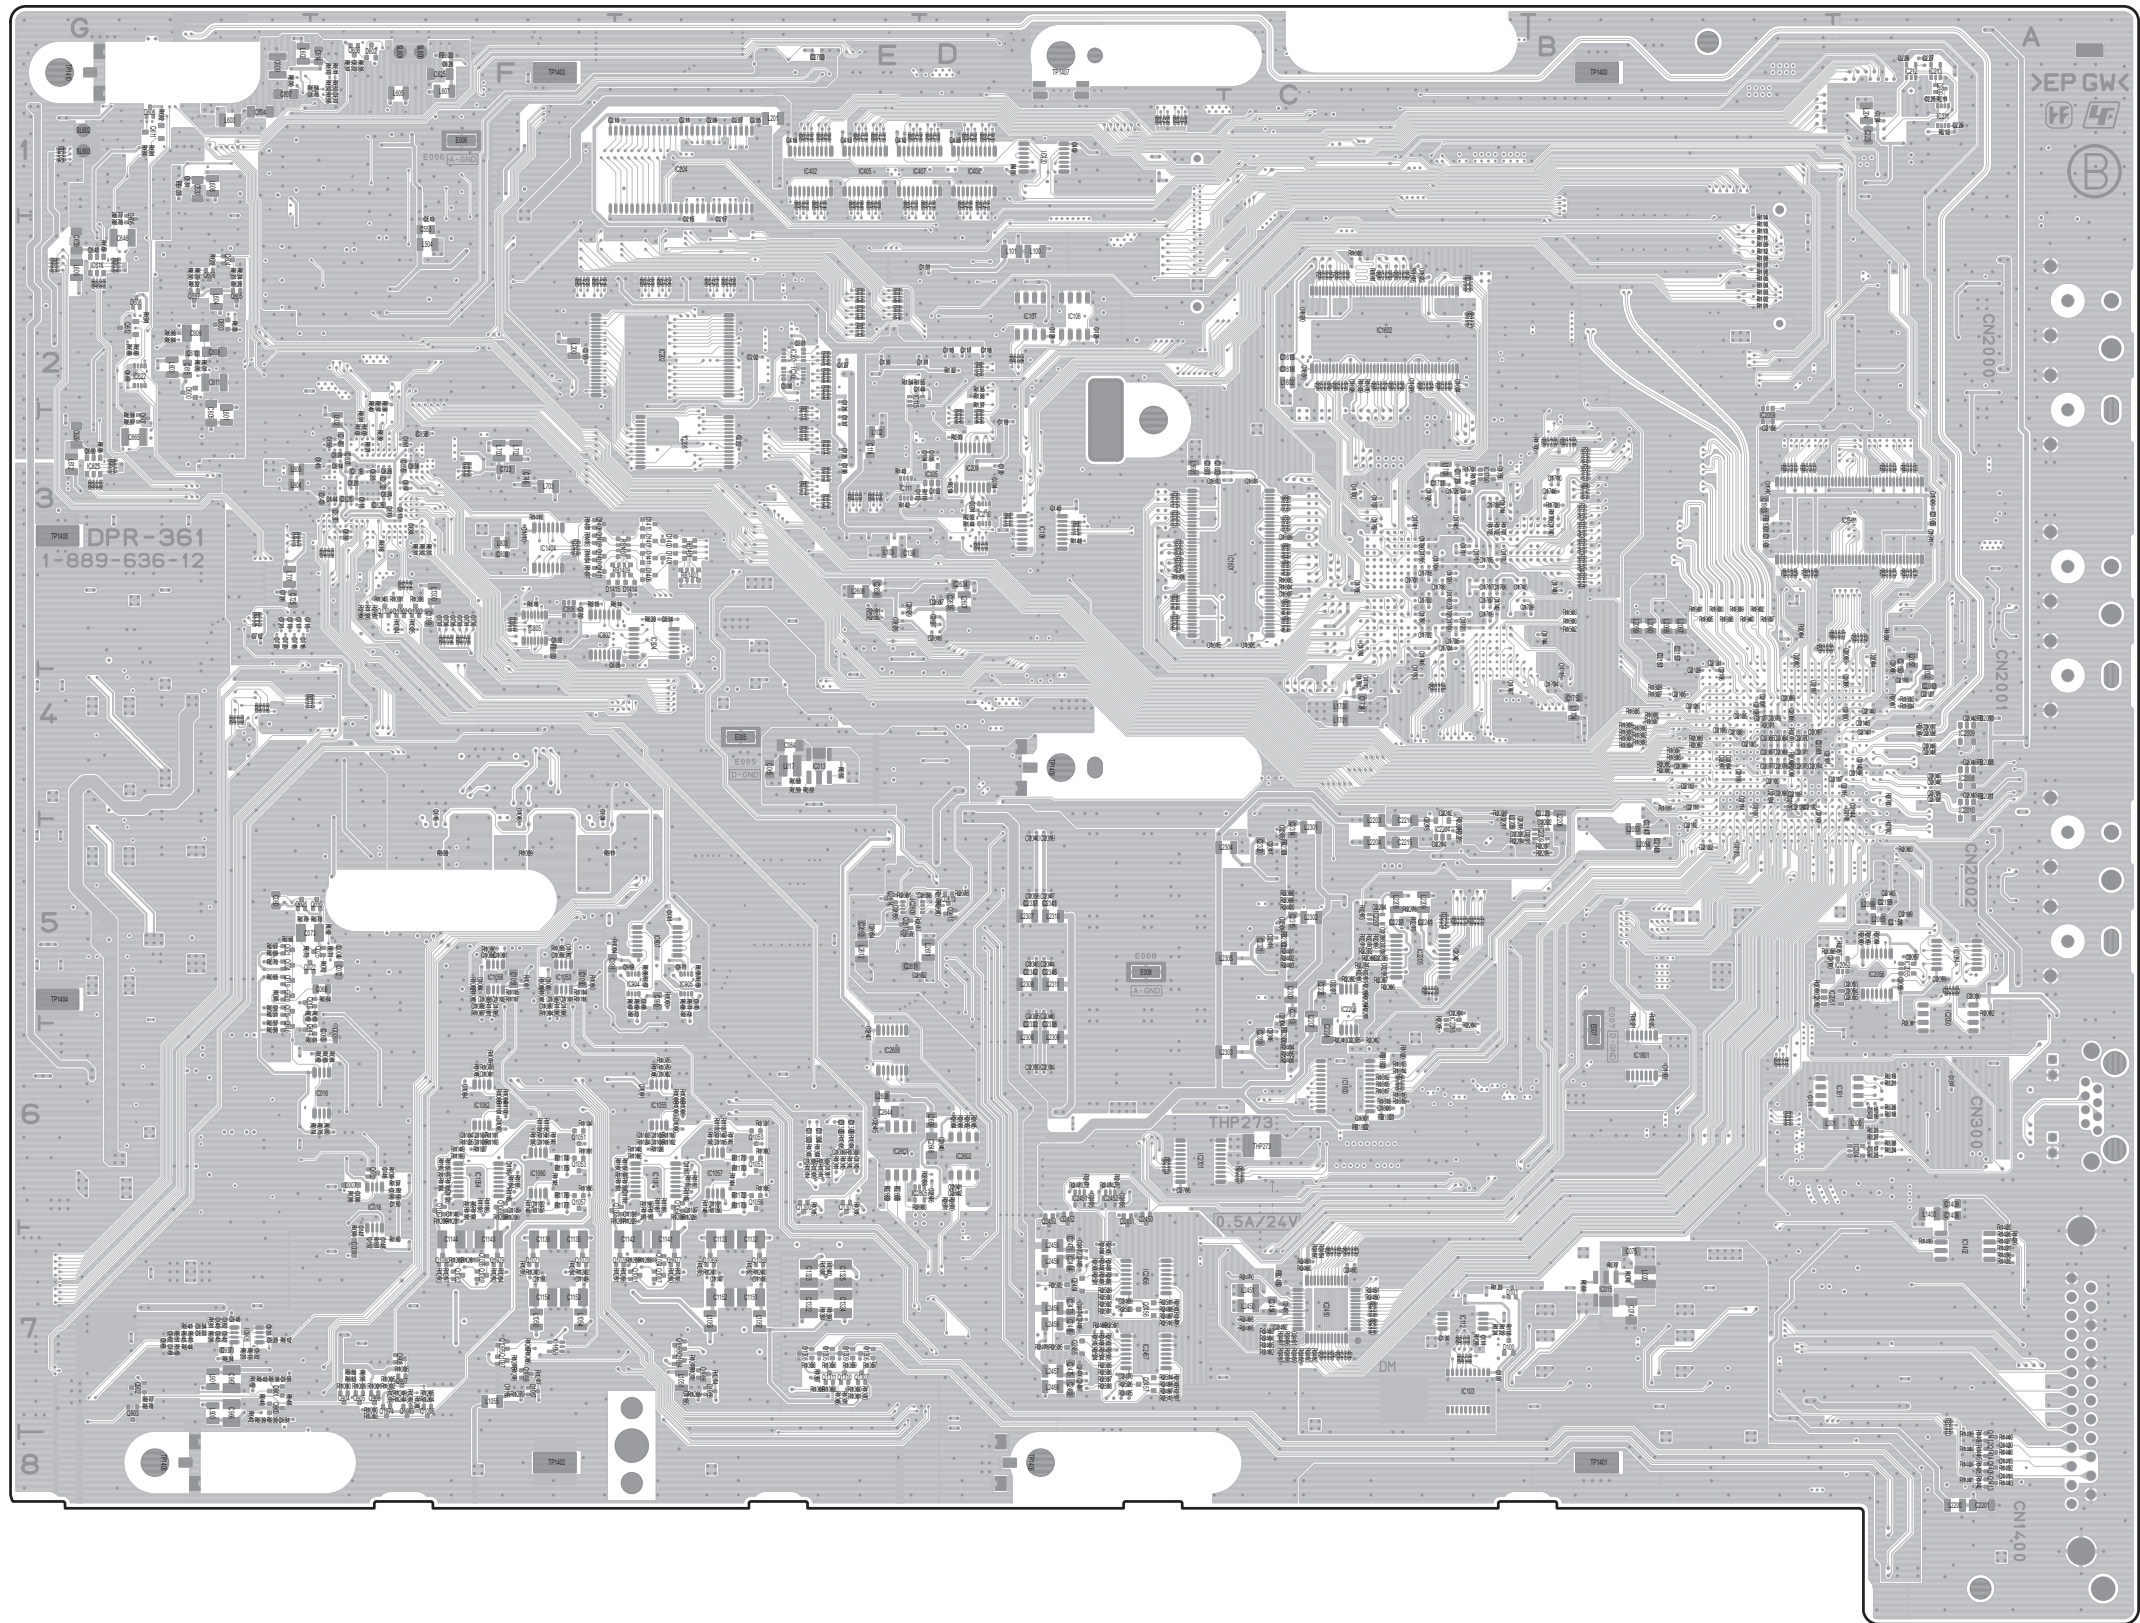


DPR-361 -B SIDE-
SUFFIX: -12


The location is described at the end in this section.




FL-379 -A SIDE-SUFFIX: -11



FL-378 -A SIDE-SUFFIX: -11




LED-525 -A SIDE-SUFFIX: -11




PS-739D



The location is described at the end in this section.

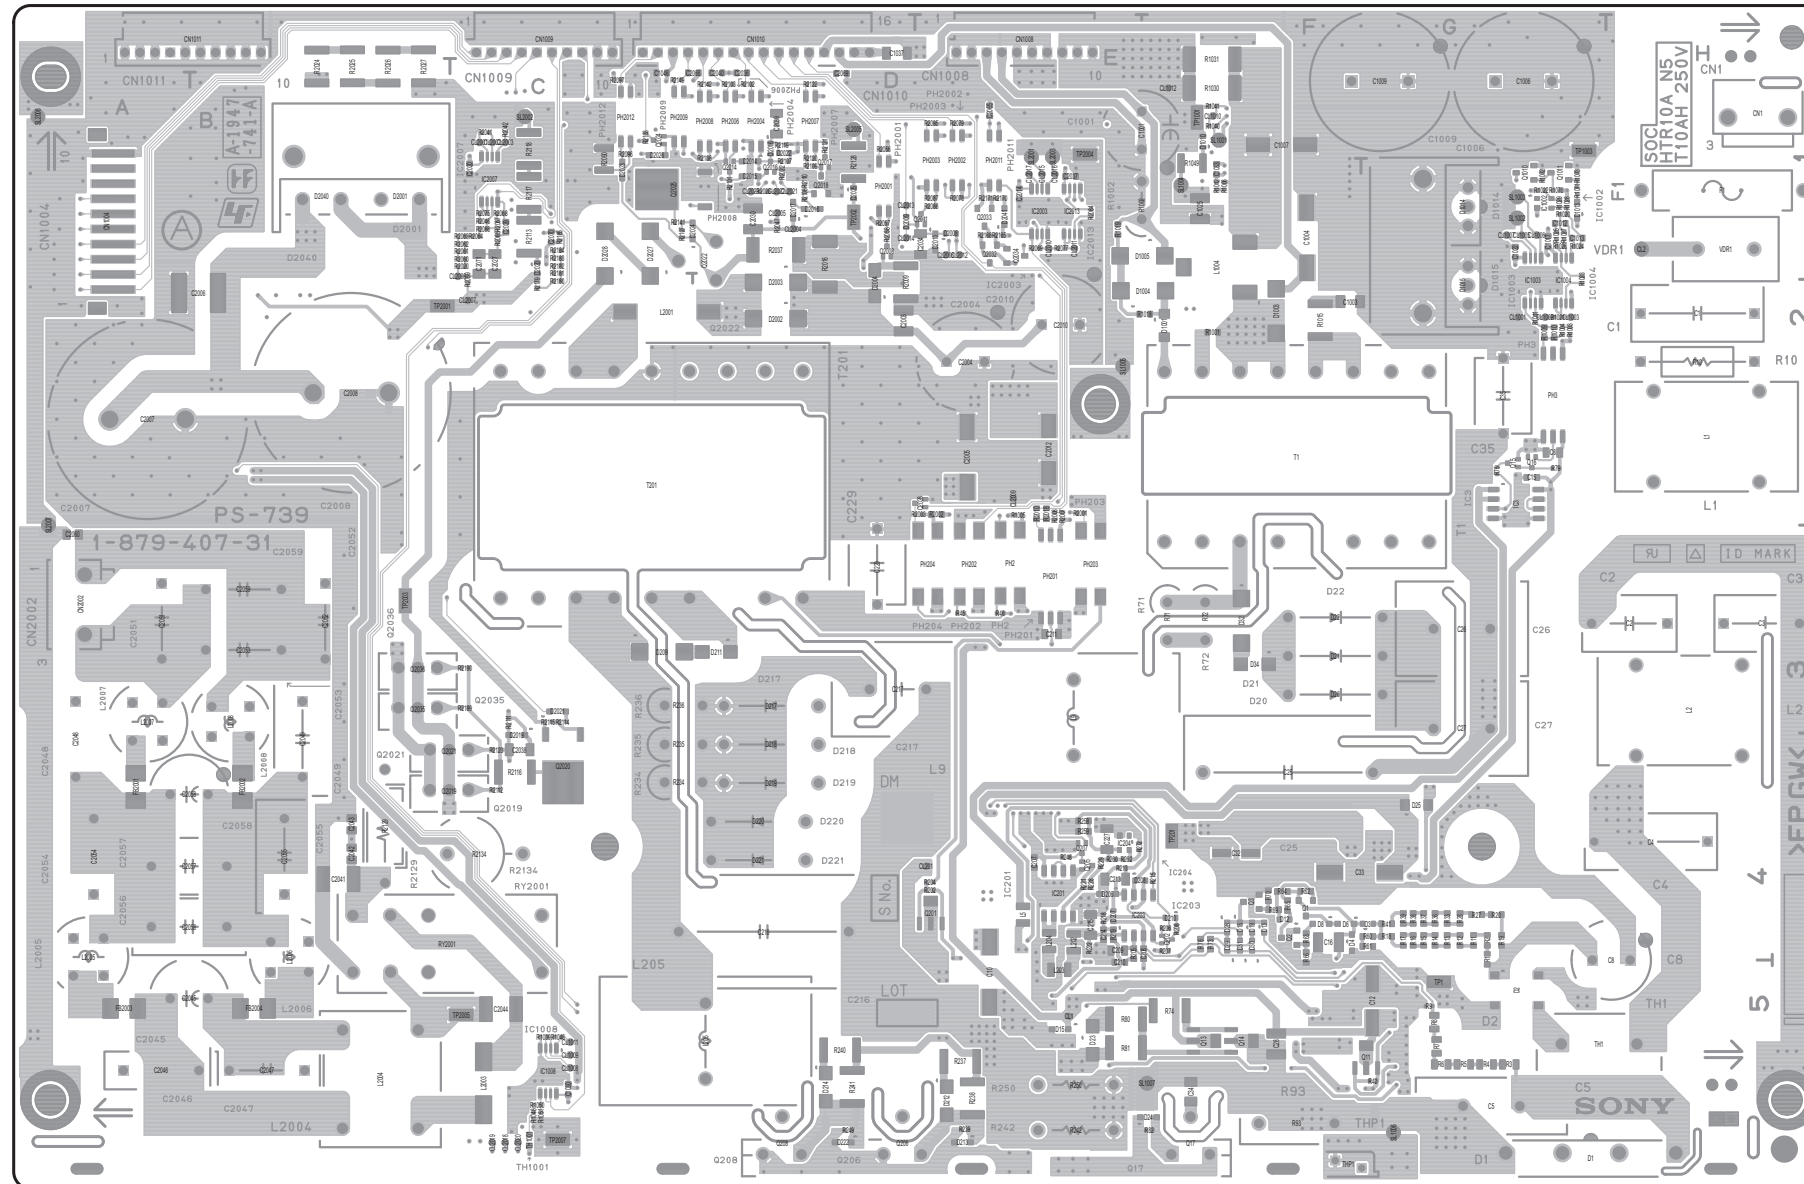

PS-739D -A SIDE-SUFFIX: -31




The location is described at the end in this section.




SW-1615

The location is described at the end in this section.

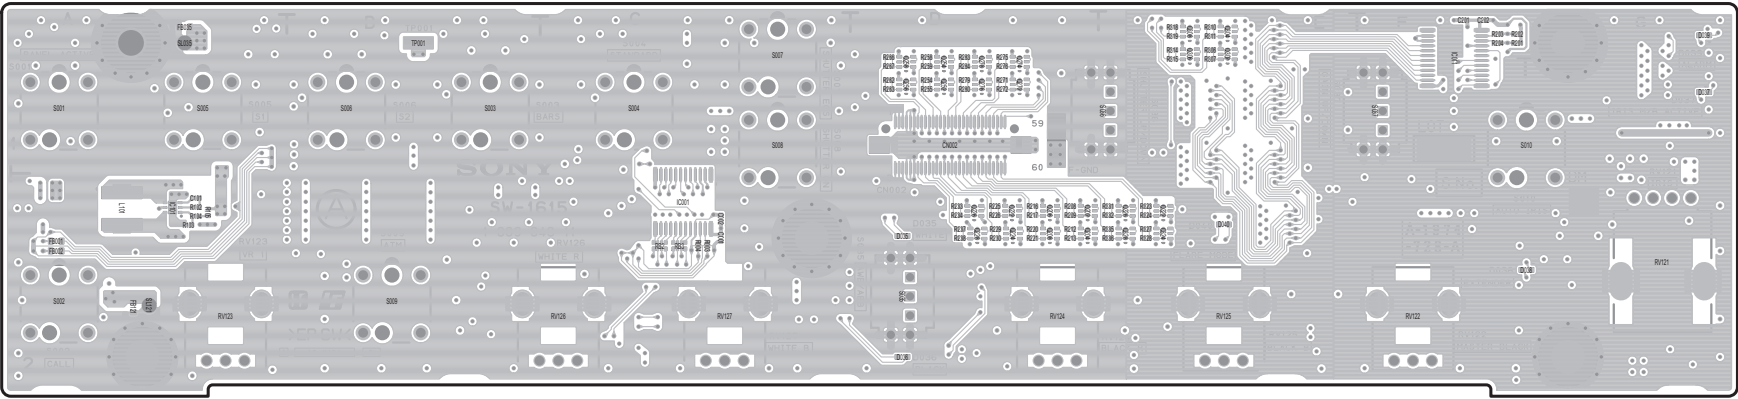

SW-1615 -A SIDE-
SUFFIX: -11

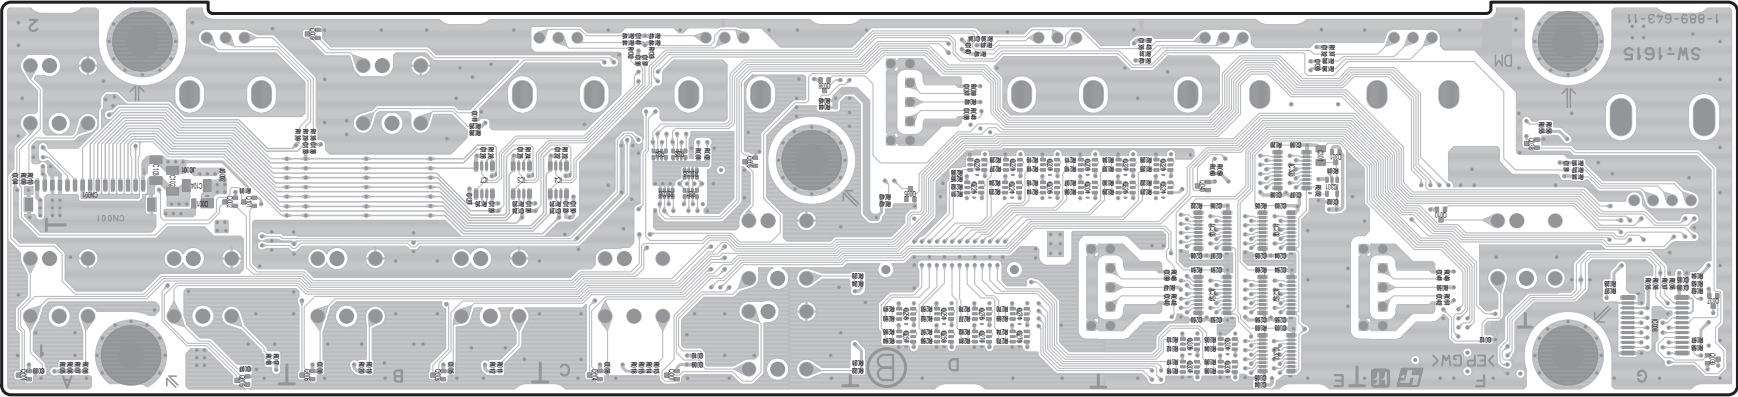

SW-1615 -B SIDE-
SUFFIX: -11

Board Parts Location

AU-358 1-889-641-11 *: B SIDE	D026	D3	R113	D1	R048	* B3	CN-3661 1-889-639-11 *: B SIDE	CN-3662 1-889-640-11 *: B SIDE	FB074	A1	R013	D1	CT-257D 1-879-406-31 *: B SIDE	FB5006	A1	R5064	* A4	DM-152 1-889-621-11 *: B SIDE	C254	* G2	C514	* F5	C636	* F4	C912	* B4	C1034	* D6
	D027	D3	R114	D1	R049	* B1			R014	D1	FB5007	A1		R5065	* A4	C255	* G2		C515	* F5	C637	* F4	C913	* B4	C1035	D6		
	D028	D3	R115	D3	R050	* B1			R015	D2	FB5008	A1		R5066	* A4	C256	* G2		C516	* F5	C638	* F4	C914	* B4	C1036	* C6		
	D041	B3	R117	C1	R051	* B1			R016	D2	FB5009	A1		R5067	* A4	C257	* G3		C517	* F5	C639	* G4	C915	* B4	C1037	C6		
	C111	C1	D042	B3	R118	C1			R052	* B1	R017	D2		FB5010	A1	R5068	B3		C258	* G3	C518	* F5	C640	* G4	C916	* B4	C1038	* C6
	C112	C1	D043	B1	R119	C1			R053	D1	R018	D2							C259	* G3	C519	* F5	C641	* G4	C917	* B4	C1039	* C6
	C113	D1	D044	B2	R120	C1			R054	D1	R019	E1		FL5001	A1	S5001	B3		C260	* G3	C520	* F5	C642	* G4	C918	* B4	C1040	* C6
	C114	D1	D045	D1	R121	D1			R055	B3	R020	E2							C261	* G2	C521	* F5	C643	* G4	C919	* B4	C1041	* C5
	C115	C1	D046	C3	R122	D1			R056	B3	R021	E2		IC5001	* A4	TP5001	B5		C262	* G3	C522	* F5	C644	* G4	C920	* B4	C1042	* C6
	C116	C1	D048	C1	R123	D1			R059	C1	R022	E2		IC5002	B4				C263	* G3	C523	* F5	C645	* G4	C921	* B4	C1043	* C5
C117	D1	D081	A1	R124	D1	R060	C1	R023	E2	IC5003	* A4	X5001	A3	C264	* G3	C524	* F5	C646	* G4	C922	* B4	C1044	* D5					
C118	D1	D082	A1	R125	D2	R061	D3	R024	C2	IC5004	A4			C265	G3	C525	* F5	C647	* F4	C923	* B4	C1045	* C6					
C119	D3	D083	A1	R126	D3	R081	* B2	R025	C2	IC5005	* B4			C266	G3	C526	* F5	C648	* F4	C924	* B4	C1046	* C5					
C120	D3	D084	A1	R127	D3	R082	* B2	R041	D1	IC5007	* A3			C267	G3	C527	* F5	C649	* F4	C925	* B4	C1047	* C6					
C121	D3	D085	A1	R128	D3	R083	* B2	R042	D1	IC5008	* B4			C268	G3	C528	* F5	C650	* F4	C926	* B4	C1048	* D6					
C141	B3	D086	A1	R141	* B3	R084	* B2	R043	D1	IC5009	* B4			C269	G3	C529	* F5	C651	G4	C927	* B4	C1100	* D4					
C142	* B3	D087	A1	R142	* B3	R085	* A1	R044	D2	IC5010	B5			C270	G3	C530	* F5	C652	G4	C928	* B4	C1101	* D3					
C143	* B3	D088	A1	R143	B3	R086	* A1	R045	D2	IC5011	* B4			C271	G3	C531	* F5	C654	G3	C929	* B4	C1102	* D4					
C144	B3	D089	A1	R144	B3	R087	* A1	R046	D2	IC5012	A5			C272	G2	C532	* F5	C655	G3	C930	* B4	C1103	* E4					
C145	B3			R145	B3	R088	* A1	R047	D2	IC5013	A2			C273	G1	C533	* F5	C656	G4	C931	* B4	C1104	* D4					
C146	B3	EN111	D2	R146	B3	R089	* A1	R048	D1	IC5014	B2			C274	G1	C534	* F5	C657	G3	C932	* B4	C1105	* D4					
C147	B3			R147	B3	R090	* A1	R049	D1					C275	G1	C535	* F5	C658	* G4	C933	* B4	C1106	* D4					
C148	* B3	FB001	* D3	R148	B3	R091	* A1	R050	D1	L5006	B1			C276	G1	C536	* F5	C659	* G3	C934	* B4	C1107	* D3					
C149	B3	FB002	* D3	R149	B3	R092	* A1	R051	D2	L5007	B2			C277	G2	C537	* F5	C660	* G3	C935	* B4	C1108	* D3					
C150	B2	FB003	* D3	R150	B3	R093	* A1	R052	D2	L5008	B1			C278	F2	C538	* F5	C661	* G3	C936	* B4	C1109	* D4					
C151	B2	FB004	* D3	R151	B3	R094	* A1	R053	D2	L5009	B1			C279	F2	C539	* F4	C662	G4	C937	* B4	C1110	* D4					
C152	B2	FB005	* D2	R152	B3			R054	D2					C280	F2	C540	* F4	C663	* G3	C938	* B4	C1111	* D3					
C153	* B2	FB006	B1	R153	B3	RB111	* B2	R055	D2	Q5001	B4			C281	G2	C541	* F4	C664	* G3	C939	* B4	C1200	* G2					
C154	* B2	FB041	* D3	R154	B3	RB112	* B2	R056	D2	Q5002	B4			C282	F2	C542	* F4	C665	G3	C940	* B4	C1201	* F2					
C155	* B2	FB042	* D3	R155	B3	RB113	B2	R057	E2	Q5003	B4			C283	* G1	C543	* F4	C666	G3	C941	* B3	C1202	* F2					
C156	* B3	FB141	B3	R156	B3			R058	D2					C284	* G1	C544	* F4	C667	G3	C942	* B3	C1203	* F2					
C157	* B2			R157	B2	RV001	B1	R059	D2	R5001	B3			C285	* G2	C545	* F4	C668	G3	C943	* B3	C1204	* F2					
C158	* B2	IC001	D2	R158	* B3			R071	A1	R5002	B3			C286	* G2	C546	* F4	C669	* G3	C944	* B3	C1205	* F2					
C159	* B2	IC002	* D3	R159	* B2	S111	C1	R072	A1	R5003	B3			C287	* F2	C547	* F4	C670	* G3	C945	* B3	C1206	* F2					
C160	* B2	IC6	* D3	R160	* B2	S112	C1	R073	B1	R5004	B3			C288	G2	C548	* E4	C671	* G3	C946	* B3	C1207	* F2					
C161	* D2	IC009	B2	R161	* B2	S113	D1	R074	B1	R5005	B3			C289	F2	C549	* E4	C672	* G3	C947	* B4	C1208	* F2					
C162	* D2	IC141	* B2	R162	* B2	S114	D1	R075	B1	R5006	B3			C290	* G1	C550	* E5	C673	G3	C948	B3	C1209	* F2					
C163	* B2			R163	* B2			R076	B1	R5007	* A4			C291	* F2	C551	* E5	C674	G3	C949	A4	C1210	F2					
C164	* B2	JC001	D3	R164	* B2	SL001	B1			R5008	B3			C292	* F2	C552	* E5	C675	G3	C950	* A4	C1211	F2					
		JC041	D1	R165	* B2	SL111	D1	THP001	A2	R5009	B3			C293	* F2	C553	* E5	C676	G3	C951	* A4	C1212	G2					
		JC042	* D2	R166	* B2					R5010	B3			C294	* G2	C554	* E5	C677	* G3	C952	* A4	C1213	G2					
		JC043	D1	R167	* B3	THP001	D1			R5011	B3			C295	* G2	C555	* E5	C678	* G3	C953	* A4	C1214	F2					
				R168	* B2					R5012	B4			C296	* G2	C556	* E5	C679	* G3	C954	* A4	C1215	G2					
				R169	* B2	TP001	B1			R5013	B4			C297	* F2	C557	* E5	C680	* G3	C955	* A4	C1216	G2					
				R170	* B2					R5014	B4			C298	* G2	C558	* E5	C681	* G3	C956	* A4	C1						

C1253	* F3	C1574	B2	C1709	* D4	C1908	A2	C3469	C2	C3589	* B2	C3684	D1	C3803	E2	C3909	E1	C008	* A5	CL108	A2	CL3901	D2	FB119	A5	FB3409	D3	IC403	* E5	IC3801	E2	L3504	B2
C1254	* F3	C1575	B2	C1710	* C4	C1909	B2	C3470	C1	C3590	* B2	C3685	D1	C3804	E1	C3910	E1	C009	A5	CL109	A5	CL3904	D1	FB120	A5	FB3502	* B3	IC404	E5	IC3802	E2	L3505	* B2
C1255	* F3	C1576	B2	C1711	* C5	C1910	B2	C3471	* C2	C3601	* C1	C3686	D1	C3805	E1	C3911	E1	C010	* A6	CL110	G1	CL3905	D2	FB121	A5	FB3503	* B3	IC501	F4	IC3804	E3	L3506	* B2
C1256	G1	C1577	B2	C1712	* D5	C1911	B2	C3472	* C2	C3602	* C1	C3687	D1	C3806	E1	C3912	D2	C011	* A5	CL111	A3	CL3906	D2	FB122	A5	FB3504	* B3	IC502	E5	IC3805	E1	L3507	B3
C1257	G1	C1578	* B2	C1713	* D5	C1912	B2	C3478	C2	C3603	C1	C3688	D1	C3807	* E1	C3913	D1	C012	A5	CL112	A2	CL3907	D3	FB123	A4	FB3506	B3	IC601	G4	IC3806	* E3	L3508	B2
C1258	* F2	C1579	* B2	C1714	* D5	C1913	B2	C3479	D3	C3604	C1	C3689	* C2	C3808	* E2	C3914	D1	C013	* A5	CL113	A2	CL3908	D2	FB124	A2	FB3507	B3	IC603	G4	IC3901	D2	L3509	B2
C1259	* F2	C1580	* B2	C1715	* D5	C1914	B2	C3482	* C2	C3605	C2	C3690	* C2	C3809	E1	C3915	D1	C014	* A5	CL114	A2	CL3909	D2	FB125	A2	FB3602	* C3	IC604	* G3	IC3902	D2	L3510	* B2
C1260	* F2	C1581	* B2	C1716	* C5	C1915	B2	C3489	* C2	C3606	C1	C3701	* D1	C3810	E1	C3916	* D1	C015	B4	CL115	A1	CL3910	D2	FB126	A1	FB3603	* C3	IC606	G3	IC3904	D3	L3601	* C1
C1261	* F3	C1582	* B2	C1717	* C5	C1916	B2	C3490	* C2	C3607	C1	C3702	* D1	C3811	* E2	C3917	* D2	C016	E5	CL116	A1	CL3911	D2	FB129	A2	FB3604	* C3	IC607	G3	IC3905	D1	L3602	* C1
C1262	F3	C1583	* B2	C1718	* D5	C1917	B2	C3491	* C2	C3608	C1	C3703	D2	C3812	E1	C3918	D1	C017	B4	CL201	F3	CL3912	D1	FB130	A2	FB3606	C3	IC608	* G3	IC3906	E1	L3603	C2
C1263	F3	C1584	* B2	C1719	* D5	C2201	* D6	C3501	* B1	C3609	C1	C3704	D1	C3813	E1	C3919	D1	C018	E5	CL203	G3			FB131	A5	FB3607	C3	IC801	B4	IC3907	E1	L3604	C2
C1264	F3	C1585	* B2	C1720	* D5	C2202	* D6	C3502	* B1	C3610	C1	C3705	D1	C3814	E1	C3920	* D2	C020	* A6	CL1001	C5	CN101	A1	FB132	A5	FB3608	C3	IC802	* B4			L3605	* C2
C1265	F3	C1586	* B2	C1721	* D5	C2203	* D6	C3503	B2	C3611	C1	C3706	D1	C3815	E1	C3921	D1	C021	* A5	CL1002	C5	CN201	G6	FB133	A3	FB3609	C3	IC803	* B4	JC101	A4	L3606	D1
C1266	F3	C1587	* B2	C1722	* D5	C2204	* D6	C3504	B1	C3612	* C1	C3707	* D1	C3816	E2	C3922	D1	C022	* B6	CL1003	C5	CN202	E6	FB134	A2	FB3702	* D3	IC804	C4			L3607	C3
C1267	F3	C1588	* B2	C1723	* D4	C2205	F6	C3505	B1	C3613	* C2	C3708	* D2	C3817	E2	C3923	D1	C024	* A5	CL1004	C5	CN203	D6	FB135	A2	FB3703	* E3	IC901	B4	L102	A6	L3608	C2
C1268	F3	C1589	* B2	C1724	* C4	C2901	C5	C3506	B1	C3614	C1	C3709	D1	C3818	E2	C3924	D1	C025	* A5	CL1005	C5	CN701	B6	FB141	A1	FB3704	* D3	IC902	B4	L103	A5	L3609	C2
C1269	F3	C1590	* B2	C1725	* C4	C3401	* C1	C3507	* B1	C3615	C1	C3710	D1	C3819	* E2	C3925	D2	C027	* A6	CL1006	C5	CN1701	E4	FB142	A1	FB3706	D3	IC1001	C6	L104	A3	L3610	* C2
C1500	* B2	C1591	* B2	C1726	* D4	C3402	* C1	C3508	* B2	C3616	* C2	C3711	* D2	C3820	* E2	C3926	D2	C028	* A5	CL1007	C5	CN1901	A4	FB143	A1	FB3707	D3	IC1002	C6	L105	A1	L3611	D1
C1501	A1	C1592	* B2	C1727	* D4	C3403	C2	C3509	B1	C3617	C1	C3712	D1	C3821	* E2	C3927	D2	C030	* A5	CL1008	C5	CN3901	F2	FB144	A3	FB3708	E3	IC1003	C5	L106	A2	L3701	* D1
C1502	B1	C1593	* B2	C1728	* D4	C3404	C1	C3510	B1	C3618	C1	C3713	D1	C3822	E2	C3928	* D2	C031	A6	CL1601	E3			FB145	* A4	FB3709	E3	IC1004	D5	L107	A4	L3702	* D1
C1503	A1	C1594	* B2	C1729	* D4	C3405	C1	C3511	* B2	C3619	C1	C3714	E1	C3823	E2	C3929	* D2	C032	A5	CL1602	E3	D101	A2	FB401	E5	FB3802	* E3	IC1101	D4	L108	A2	L3703	E2
C1504	A1	C1595	* B1	C1730	* D4	C3406	C1	C3512	B1	C3620	C1	C3715	D1	C3825	E2	C3930	* D2	C034	* A5	CL1603	E3	D103	* A2	FB402	* E5	FB3803	* E3	IC1501	A1	L109	A2	L3704	E2
C1505	B1	C1596	B2	C1731	* D4	C3407	* C1	C3513	B1	C3621	C2	C3716	E2	C3826	* E2	C3931	D2	C035	* B6	CL1801	D5	D104	A2	FB403	* E5	FB3804	* E3	IC1503	B2	L201	* F4	L3705	* D2
C1506	A1	C1597	* B1	C1732	* D5	C3408	* C2	C3514	B1	C3622	C2	C3717	E2	C3827	* E2	C3932	D2	C037	A6	CL1802	D5	D105	A2	FB404	F5	FB3806	E3	IC1504	A2	L202	* G1	L3706	D2
C1507	B1	C1598	* B2	C1733	* D4	C3409	C1	C3515	B1	C3623	C2	C3718	E2	C3828	E2	C3934	D2	C038	A5	CL1803	D5	D106	A6	FB501	E5	FB3807	E3	IC1505	A3	L203	* G3	L3707	E3
C1508	B1	C1599	* B1	C1734	* C5	C3410	C1	C3516	B2	C3624	* C2	C3719	* D2	C3829	E2	C3935	* D2	C039	C4	CL1804	D5	D201	G2	FB502	E5	FB3808	E3	IC1506	B3	L204	G2	L3708	D2
C1509	B1	C1601	* D1	C1735	* D4	C3411	* C2	C3517	B2	C3625	* C2	C3720	* D2	C3830	E2	C3936	* D2	C040	* B6	CL1901	C5	D202	* F3	FB503	* F5	FB3809	E3	IC1507	B3	L205	* G3	L3709	* D2
C1510	A2	C1602	* E1	C1736	* D5	C3412	C1	C3518	B2	C3626	* C2	C3721	* D2	C3831	E2	C3937	D2	C042	A5	CL1902	C5	D203	* F3	FB504	* F5	FB3902	* D3	IC1508	B2	L206	* G3	L3801	* E1
C1511	A2	C1603	* E1	C1737	* C4	C3413	C1	C3519	* B2	C3627	C2	C3722	E2	C3832	E2	C3938	D2	C043	A5	CL1903	C5	D1501	A1	FB505	F5	FB3903	* D3	IC1509	B2	L207	* G1	L3802	* E1
C1512	A2	C1604	* E1	C1738	* C5	C3414	C1	C3520	* B2	C3628	C2	C3723	D2	C3833	E2	C3939	D2	C045	A5	CL1904	C5	D1502	A1	FB506	* E4	FB3904	* D3	IC1510	* B2	L208	* F2	L3803	E2
C1513	A2	C1605	* C1	C1739	* D5	C3415	C1	C3521	* B2	C3629	C2	C3725	D2	C3834	E2	C3940	D2	C046	A5	CL3404	C1	D1503	B2	FB507	* E4	FB3906	D3	IC1511	* B2	L209	* F2	L3804	E2
C1514	B2	C1606	* B1	C1740	* D5	C3416	C2	C3522	B2	C3630	C2	C3726	* D2	C3835	E2	C3941	D2	C048	A6	CL3405	C2	D1505	A2	FB508	* E5	FB3907	D3	IC1512	* B2	L210	* F2	L3805	* E2
C1515	B2	C1607	* C1	C1741	* C5	C3417	C2	C3523	B2	C3631	* C2	C3727	* D2	C3836	* E2	C3942	D2	C049	A5	CL3406	C2	D1506	A2	FB509	* E5			IC1513	* B3	L211	* G3	L3806	E2
C1516	A2	C1608	* D1	C1742	* C4	C3418	C2	C3524	B2	C3632	* C2	C3728	E2	C3837	* E2	C3943	D2	C051	A6	CL3407	C3	D1507	A2	FB601	* G4			IC1514	* B1	L212	* G2	L3807	E3
C1517	A2	C1609	* B1	C1743	* D4	C3419	* C2	C3525	B2	C3633	C2	C3729	E2	C3838	* E2	C3944	D2	C052	A5	CL3408	D2	D1508	* B1	FB602	* G4			IC1515	* B3	L213	* F3	L3808	E2
C1518	A2	C1610	F3	C1744	* D4	C3420	* C2	C3526	* B2	C3634	C2	C3730	D2	C3839	* E2	C3945	* D2	C056	A6	CL3409	D2	D1509	* B2	FB603	G4	FL201	G2	IC1516	B2	L214	G1	L3809	* E2
C1519	B2	C1611	F3	C1745	* C4	C3421	* C2	C3527	* B2	C3635	C2	C3731	D2	C3840	E2	C3946	* D2	C057	A5	CL3410	D2	D1510	A2	FB604	* G3	FL202	G2	IC1601	* D2	L301	* C6	L3901	* D1
C1520	A2	C1612	* F3	C1746	* C5	C3422	C2	C3528	C2	C3636	C2	C3732	D2	C3841	E2	C3947	* D2	C058	A6	CL3411	D2	D1602	* B3	FB605	* G3	FL1501	A1	IC1602	* E2	L302	* C6	L3902	* D1
C1521	A2	C1613	F3	C1747	* D4	C3423	C2	C3529	B2	C3637	C2	C3733	D2	C3843	* E2	C3948	* D2	C060	A3	CL3412	C1	D1701	E4	FB606	G3	FL1502	B1	IC1603	* E2	L401	* F5	L3903	D2
C1522	* A2	C1614	* F3	C1748	* D4	C3424	C2	C3530	B2	C3638	C2	C3734	D2	C3844	E2	C3949	D2	C063	* A4	CL3416	D3	D3401	* C2	FB607	G3	FL1503	C1	IC1604	* C2	L402	* F5	L3904	D2
C1523	A2	C1615	* B3	C1749	* D4	C3425	C2	C3531	B2	C3639	C2	C3735	D2	C3845	E2	C3950	D2	C064	A1	CL3501	B2	D3501	* B2	FB608	G3	FL1504	E1	IC1605	* B2	L403	* F5	L3905	* D2
C1524	A3	C1616	* B3	C1750	* D4	C3426	* C2	C3532	B2	C3640	C2	C3736	* D2	C3846	E2	C3952	* D2	C065	* A2	CL3504	B1	D3601	D1	FB609	* G3	FL1505	E1	IC1606	* C2	L601	G4	L3906	D2
C1525	A3	C1617	* D2	C1751	* D4	C3427	* C2	C3533	B2	C3641	* C2	C3737	* D2	C3847	E2	C3953	D2	C066	A1	CL3505	B2	D3602	D1	FB610	* G3	FL1506	F2	IC1607	F3	L602	* G3	L3907	D3
C1526	A3	C1618	* E2	C1752	* D4	C3428	D2	C3534	B2	C3642	* C2	C3738	* D2	C3848	E2	C3954	D2	C067	* A2	CL3506	B2	D3603	* C2	FB611	* G3	FL1507	D1	IC1608	E3	L603	* G3	L3908	D2
C1527	A3	C1619	* E2	C1753	* D4	C3429	C2	C3535	B2	C3643	* C2	C3739	* D2	C3849	E2	C3955	D2	C068	* A2	CL3507	B3	D3701	* D2	FB612	* F3			IC1609	* B3	L701	C6	L3909	* D2
C1528	A3	C1620	* B2	C1754	* C4	C3430	C2	C3536	* B2	C3644	* C2	C3740	D2	C3850	E2	C3956	D2	C069	A2	CL3508	B2	D3801	* E2	FB613	* G3	IC101	B4	IC1611	* E2	L801	* B4		
C1529	A3	C1621	* B2	C1755	* C4	C3431	C2	C3537	* B2	C3645	C2	C3741	D2	C3851	* E2	C3957	D2	C070	A1	CL35													

R101	A5	R194	A6	R287	F3	R516	* F5	R816	* A4	R1205	F3	R1534	A2	R1626	* C1	R1801	D4	R2201	D6	R3420	D3	R3573	* B2	R3722	D3	R3867	* E2	RB505	* F5	RB1604	E3	RV1502	B2
R102	E5	R195	A6	R288	F3	R517	F5	R817	* B4	R1206	G2	R1535	A3	R1627	F3	R1802	* D4	R2202	D6	R3421	D3	R3574	* B2	R3723	* D3	R3901	E1	RB506	* F5	RB1605	D3	RV1503	B2
R103	A5	R196	A6	R289	G3	R518	F5	R818	* B5	R1207	G2	R1536	A3	R1628	* F3	R1803	D4	R2203	* D6	R3422	D3	R3601	D1	R3724	* D3	R3902	E1	RB507	* F5	RB1606	* D3		
R104	A5	R197	A6	R290	G3	R519	* E5	R819	* B4	R1208	G2	R1537	A3	R1629	* F3	R1804	D4	R2204	* D6	R3423	C3	R3602	D1	R3728	E3	R3903	E1	RB508	* F5	RB1607	* C3	SL103	A6
R105	* A5	R198	A6	R291	G3	R601	G4	R820	B4	R1209	G1	R1538	A3	R1630	* F3	R1805	* D4	R2205	F6	R3424	* C3	R3603	D1	R3729	E3	R3904	E1	RB509	F5	RB1608	* E3	SL104	G6
R106	* A5	R199	A6	R292	G3	R602	* G4	R821	* B4	R1210	* F3	R1539	A3	R1631	F3	R1806	* D4	R2206	F6	R3425	* C3	R3604	D1	R3730	D3	R3905	E1	RB510	* F5	RB1609	* E3	SL109	D6
R107	* A5	R200	A6	R293	G3	R603	* G3	R822	* B4	R1211	* F3	R1540	A3	R1632	F3	R1807	* C5	R2207	F6	R3429	D3	R3605	C1	R3731	D3	R3906	E1	RB511	* F5	RB1610	* D3	SL601	G3
R108	* A5	R201	* F3	R294	G3	R604	G4	R823	* B4	R1212	* F3	R1541	A3	R1633	* F3	R1808	* D4	R2208	E6	R3430	C3	R3606	C1	R3732	D3	R3907	E1	RB512	F5	RB1701	E5	SL602	F3
R109	A5	R202	* F3	R295	G3	R606	G4	R824	B4	R1213	* F2	R1542	A3	R1634	* B3	R1809	C4	R2209	E6	R3431	C3	R3607	C1	R3733	E3	R3908	E1	RB513	F5	RB1702	E5		
R110	* A6	R203	* F3	R296	G3	R607	G4	R825	B4	R1214	* G2	R1543	A3	R1635	* B3	R1810	C4	R2210	E6	R3432	C3	R3608	C1	R3734	D3	R3909	E1	RB514	* F5	RB1703	E4	SWF1	D2
R111	* A5	R204	F3	R297	F3	R608	G4	R826	* B4	R1215	* G2	R1544	A3	R1636	* B3	R1811	D4	R2211	D6	R3433	C3	R3609	C1	R3735	D3	R3910	D1	RB515	* E5	RB1704	E4	SWF2	B2
R112	A5	R205	* F3	R298	F3	R609	G4	R827	B4	R1216	* G2	R1545	A3	R1637	* F3	R1812	C4	R2212	D6	R3434	C3	R3610	C1	R3736	E2	R3911	D1	RB516	* E5	RB1705	E4	SWF3	C2
R113	* A5	R206	* F3	R299	F3	R610	G4	R828	B4	R1217	* F2	R1546	* B2	R1638	* B3	R1813	* C4	R2213	F6	R3435	C3	R3611	C1	R3737	* D2	R3912	D1	RB517	E5	RB1706	E5	SWF4	E2
R114	* A5	R207	* F3	R301	C6	R611	* G3	R829	B4	R1218	F3	R1547	A3	R1639	* D2	R1814	C5	R2214	E6	R3436	C3	R3612	C1	R3738	* D2	R3913	D1	RB518	F5	RB1707	E4	SWF5	E2
R115	A4	R208	* F3	R302	C6	R612	* G3	R830	B4	R1219	F3	R1548	B3	R1640	* E2	R1815	C5	R2215	E6	R3437	C2	R3613	* C2	R3739	E2	R3914	D1	RB519	* F5	RB1708	E4	SWF6	D2
R116	A4	R211	* F3	R303	C6	R613	* G3	R831	B4	R1220	* F3	R1549	B3	R1641	* B2	R1816	* D5	R2216	D6	R3438	* C2	R3614	* C2	R3746	D2	R3915	* D2	RB520	E5	RB1709	E5		
R117	A4	R212	* F3	R304	C6	R614	* G3	R832	* B4	R1221	* F3	R1550	B3	R1642	* B2	R1817	* D5	R2217	F6	R3439	* C2	R3615	* C2	R3747	D2	R3916	* D2	RB521	E5	RB1801	C4	T201	G2
R118	E5	R220	G2	R305	C6	R615	* G3	R833	* B4	R1222	* F3	R1551	B3	R1643	* C2	R1818	* D5	R2218	E6	R3443	C1	R3616	C2	R3748	D2	R3917	* D2	RB603	G4	RB1802	C4	T202	G1
R119	E5	R221	G2	R306	C6	R616	* G3	R901	* B4	R1223	* F3	R1552	B3	R1644	* C2	R1819	* D5	R2219	D6	R3451	C1	R3617	C1	R3749	D1	R3918	* D2	RB604	G4	RB1803	* D4	T203	F1
R120	E5	R222	G2	R309	C6	R617	* G3	R902	B4	R1224	* F3	R1553	B3	R1645	F3	R1820	* D5	R2601	F3	R3452	* C2	R3618	C2	R3757	* D2	R3919	D1	RB605	G4	RB1804	* D4	T204	G1
R123	* A6	R223	G2	R310	C6	R618	* G3	R903	B4	R1225	* F3	R1554	B3	R1646	F3	R1821	* D5	R2602	F3	R3453	C1	R3619	C2	R3758	D1	R3920	D2	RB606	G4	RB1805	* D4		
R124	* A6	R224	G2	R311	C6	R619	* G3	R904	B4	R1226	* F3	R1555	B3	R1647	* F3	R1822	* D5	R2603	F3	R3454	* C2	R3620	C2	R3759	D3	R3921	D2	RB607	G3	RB1806	* D4	TP101	* D1
R125	* A5	R225	G2	R312	C6	R620	* G3	R905	B4	R1227	* E4	R1556	B3	R1648	* F3	R1823	* D5	R2604	F3	R3455	* C2	R3621	* C2	R3760	D3	R3922	D2	RB608	G3	RB1807	C5	TP102	* G4
R126	* A5	R226	G2	R313	C6	R621	* G3	R906	B4	R1228	* E3	R1557	B3	R1649	* F3	R1824	D5	R2605	F3	R3456	C2	R3622	C2	R3762	D2	R3923	* D2	RB609	G3	RB1808	D5	TP103	* D6
R127	A4	R227	G2	R314	C6	R622	* G3	R907	B4	R1229	* E4	R1558	B3	R1650	* F3	R1825	D4	R2606	F3	R3457	C2	R3623	C2	R3763	D2	R3924	D2	RB610	G3	RB1809	D4	TP104	* A4
R128	E5	R228	G2	R315	C6	R623	G3	R908	B4	R1230	* F2	R1559	B3	R1651	* F3	R1826	* D4	R2607	F3	R3459	* C2	R3624	C2	R3764	D2	R3925	D2	RB611	G3	RB1810	D4	TP201	F3
R129	* B6	R229	G2	R316	C6	R624	F3	R909	B4	R1231	* F2	R1560	B1	R1652	* F3	R1827	* C4	R2608	E3	R3460	* C2	R3625	C1	R3765	* D2	R3926	D2	RB612	G3	RB1811	D5	TP202	G2
R132	* A6	R230	G2	R317	C6	R625	* G3	R910	B4	R1232	* F2	R1561	B1	R1653	* F3	R1828	C5	R2609	E3	R3461	* C2	R3626	* C2	R3766	* D2	R3927	D1	RB613	F3	RB1812	* D5	TP203	F2
R133	* A5	R231	G2	R318	C6	R626	* G3	R911	B4	R1233	* G2	R1562	B1	R1654	F3	R1829	D5	R2610	F3	R3470	C2	R3627	* C2	R3767	* D2	R3928	D3	RB614	F3	RB1901	D5	TP204	G2
R134	* A5	R232	* G2	R320	E6	R627	* F3	R912	B4	R1234	* G2	R1563	B1	R1655	* E3	R1830	D5	R2611	* F3	R3471	C2	R3630	C3	R3801	E1	R3929	D3	RB615	G4	RB1902	D5	TP301	C6
R135	* A6	R233	* G2	R321	E6	R628	* F3	R913	B4	R1235	* G2	R1564	B1	R1656	* E3	R1831	* D5	R2612	E3	R3472	* C2	R3631	C3	R3802	E1	R3930	D3	RB701	B6	RB1903	* D5	TP1501	A2
R136	* B6	R234	* G2	R323	E6	R629	G3	R914	B4	R1236	G2	R1565	A2	R1657	* F3	R1832	* D5	R2613	E3	R3473	C2	R3632	C3	R3803	E1	R3931	D3	RB702	B6	RB1904	D5	TP1502	B2
R137	* B6	R235	* G2	R324	E6	R630	G3	R915	B4	R1237	G2	R1566	A2	R1658	E3	R1833	D5	R2614	E3	R3501	B1	R3633	C3	R3804	E1	R3932	* D3	RB703	B6	RB1905	* D5	TP1503	B2
R139	* A5	R236	* G2	R401	* F5	R631	* G3	R916	* B4	R1238	F3	R1567	A2	R1659	E3	R1834	C5	R2615	E3	R3502	B1	R3634	* C3	R3805	E1	R3933	* D3	RB704	B6	RB1906	D5	TP1505	B2
R140	* A6	R237	* G2	R402	* F5	R632	* F3	R917	B4	R1239	F3	R1568	B2	R1660	* E3	R1838	D4	R2616	E3	R3503	B1	R3635	* C3	R3806	E1	R3937	D3	RB801	C4	RB1907	D4		
R142	A6	R238	* G2	R403	* F5	R633	* G3	R918	B4	R1240	F3	R1569	A2	R1661	* E3	R1839	D4	R2617	E3	R3504	B1	R3639	C3	R3807	* E2	R3938	D3	RB802	* B4	RB1908	D4	X201	F3
R143	A5	R239	G2	R404	F5	R634	G3	R919	* B4	R1241	F3	R1570	* B2	R1662	* E3	R1840	* D5	R2618	E3	R3505	B1	R3640	C3	R3808	* E2	R3939	D3	RB803	B4	RB1909	D4	X401	* F5
R145	* A5	R240	G2	R405	F5	R635	* F3	R1001	C6	R1242	F3	R1579	B2	R1663	E3	R1841	D5	R2619	E3	R3506	B1	R3641	C3	R3809	* E2	R3940	D3	RB804	B5	RB1910	* D4	X601	* G4
R146	C4	R241	* G2	R406	F5	R636	F3	R1002	C6	R1243	F3	R1580	B2	R1665	F3	R1842	D5	R2620	E3	R3507	* B2	R3642	C3	R3810	* E2	R3941	D3	RB805	B4	RB1911	* D4	X801	* B4
R150	* A4	R242	G2	R407	F5	R637	* G3	R1003	C6	R1244	F3	R1581	B2	R1666	F3	R1843	D5	R2621	* E4	R3508	* B2	R3643	C3	R3811	E1	R3942	D3	RB806	B4	RB1912	* D4		
R151	* A2	R243	* G2	R408	F5	R638	* F3	R1004	C6	R1245	F3	R1582	B2	R1667	F3	R1844	D5	R2901	D4	R3509	* B2	R3644	C3	R3812	E2	R3943	D3	RB807	* B4	RB1913	* D4		
R152	* A2	R244	* G2	R409	* E5	R639	G3	R1005	C6	R1246	F3	R1583	B2	R1668	* F3	R1845	D5	R2902	C5	R3510	B2	R3645	C3	R3813	E2	R3944	D3	RB808	B4	RB1914	* D4		
R153	* A5	R245	* G2	R410	* E5	R640	F3	R1006	C6	R1247	F3	R1584	B2	R1669	* F3	R1846	D5	R2903	* C5	R3511	B1	R3646	C3	R3814	E2	R3945	D1	RB809	B4	RB1915	D4		
R154	* A4	R246	* G3	R411	* E5	R641	G3	R1007	C5	R1248	E3	R1585	B2	R1670	* F3	R1901	* B1	R2904	* C4	R3512	B2	R3647	* C2	R3815	* E2	R3946	D2	RB810	* B4	RB1917	* C4		
R155	* A4	R247	* G2	R412	E5	R642	G3	R1008	C6	R1249	F3	R1586	B2	R1671	F3	R1902	* B1	R2905	* C5	R3513	B2	R3648	* C2	R3816	E2	R3947	D2	RB811	B4	RB1918	* C4		
R156	* A2	R248	* G2	R413	E5	R643	G3	R1009	C6	R1250	E3	R1587	B2	R1672	F3	R1903	* B1	R2906	C4	R3514	B2	R3649	* C2	R3817	E2	R3948	* D2	RB901	* B4	RB1919	* C4		
R157	* A2	R249	G3	R414	* E5	R644	G3	R1010	C6	R1251	F3	R1588	B2	R1673	F3	R1904	* B1	R2907	C5	R3515	* B2	R3650	C2	R3818	E2	R3953	* D2	RB902	B4	RB1920	* C4		
R158	* G1	R250	G3	R415	* F5	R645	G3	R1011	C6	R1252	F3	R1589	B2	R1674	F3	R1905	* B1	R2908	C5	R3516	B2	R3651	C1										

DPR-361 [-11] 1-889-636-11 *: B SIDE BT100C7	C223	*A1	C529	F1	C670	G3	C838	*F3	C971	*E5	C1096	*F5	C1322	*E7	C1718	*C3	C2025	A5	C2122	*B5	C2249	C5	C2607	E5	C025	G5	CL013	G5	CL2601	D3	D006	G3	
	C224	*A1	C530	F2	C671	G2	C839	*F3	C972	G7	C1097	*F5	C1323	*E7	C1719	*C3	C2026	A3	C2123	*B5	C2300	D4	C2608	E5	C026	B7	CL014	G5	CL2602	D3	D007	*F6	
	C225	*A1	C531	F2	C672	G2	C843	*F3	C973	G8	C1098	*F5	C1324	*E7	C1720	*C3	C2027	A5	C2124	*B4	C2301	C6	C2609	E5	C027	G6	CL016	E4	CL2603	D3	D008	*F7	
	C226	*A1	C534	F2	C673	G2	C844	*F3	C974	E5	C1099	F6	C1325	*E7	C1721	*C3	C2028	A3	C2125	A5	C2302	C5	C2610	E5	C028	G6	CL017	B7	CL2604	E3			
	C227	*A1	C535	F1	C674	G3	C845	*F3	C975	F6	C1100	F6	C1326	E7	C1722	*C3	C2029	A5	C2126	*B4	C2303	C5	C2611	E5	C029	G6	CL018	G6	CL2700	B6	E001	C4	
	C228	A1	C536	F1	C675	G3	C849	*F3	C976	E5	C1101	*F5	C1327	E7	C1723	*C3	C2030	A3	C2127	*B4	C2304	*C5	C2612	E4	C030	G3	CL019	G6	CL2701	B6	E002	F4	
	C229	*A1	C537	F1	C676	*F1	C850	*F3	C977	E6	C1102	*F5	C1328	E7	C1724	*C4	C2031	A3	C2128	*B4	C2305	*C5	C2613	E4	C031	G5	CL020	F6	CL2702	B6	E003	F2	
	C230	A1	C538	G1	C677	*F1	C851	*F3	C978	E6	C1103	*E6	C1329	E7	C1725	*C3	C2032	A3	C2129	*B4	C2306	*C5	C2614	D4	C032	G5	CL021	F7	CL2703	B6	E004	C7	
	C231	D2	C539	G1	C700	F4	C855	*F3	C979	E6	C1104	*F6	C1400	A7	C1726	*C3	C2033	A5	C2130	*B4	C2307	C6	C2615	D4	C033	G3	CL100	D2			E005	*E4	
	C101	*D2	C232	D1	C540	G2	C701	G4	C856	*F3	C980	E6	C1105	*E6	C1401	A7	C2034	A5	C2131	*B3	C2308	C6	C2616	*D3	C034	G5	CL101	D2	CN001	G7	E006	*F1	
C102	*D3	C300	*E2	C541	F2	C702	G4	C857	*F3	C981	E6	C1106	*E6	C1402	B7	C1728	C4	C2035	A5	C2132	*B4	C2309	C5	C2617	D3	C035	G5	CL102	D2	CN002	F7	E007	*B6
C103	D2	C301	*E2	C542	G1	C703	G4	C858	*F3	C982	F7	C1107	*F6	C1403	A7	C1729	*C3	C2036	*A4	C2133	*B4	C2310	C5	C2618	E3	C036	G4	CL103	D2	CN003	G6	E008	*D5
C104	*D3	C302	A6	C544	F2	C704	G4	C900	F5	C983	F7	C1108	*F6	C1404	A7	C1730	C4	C2037	*A4	C2134	*B4	C2311	C5	C2619	E3	C037	G6	CL104	D2	CN100	B2		
C105	*D3	C303	A6	C545	G1	C705	G4	C901	F5	C984	E6	C1109	F6	C1405	A7	C1731	*C3	C2038	A4	C2135	*B4	C2312	C5	C2620	E3	C038	G4	CL105	D3	CN101	G2	FB001	G7
C106	C7	C304	A6	C546	F2	C706	G4	C902	F5	C985	E6	C1110	F6	C1406	A7	C1732	*C3	C2039	A4	C2136	*B4	C2313	*C5	C2621	E3	C039	G5	CL200	D3	CN102	G3	FB500	F1
C107	*C7	C305	A6	C547	F2	C707	G4	C903	F5	C986	E6	C1111	F6	C1407	F3	C1733	*C4	C2040	*A4	C2137	*B4	C2314	*C5	C2622	D3	C040	G6	CL201	E1	CN200	A1	FB600	*F1
C108	D2	C306	A6	C548	F2	C708	G4	C904	F5	C987	E6	C1112	F6	C1408	*A6	C1734	*B4	C2041	A4	C2138	*B4	C2315	*C5	C2623	E3	C041	G5	CL202	E3	CN201	D2	FB601	*G1
C109	D2	C307	*A6	C549	F1	C709	G4	C905	F5	C988	E6	C1113	F6	C1409	*A6	C1735	*C3	C2042	*A4	C2139	*B4	C2316	*C6	C2625	E5	C042	G6	CL203	A1	CN300	A6	FB602	G2
C110	D2	C308	A6	C550	F1	C710	F4	C906	F5	C989	E6	C1114	F6	C1410	*F3	C1736	*C3	C2043	*A4	C2140	*A4	C2317	*C5	C2627	*D3	C043	G5	CL300	A6	CN800	G2	FB800	*F3
C111	*C7	C309	A6	C551	F1	C711	G4	C907	F5	C990	*E5	C1115	*E6	C1411	A8	C1737	*C3	C2045	A4	C2141	*A4	C2318	*C5	C2628	*E3	C044	G5	CL400	D2	CN1300	A8	FB1400	A7
C112	*E3	C310	A6	C552	F2	C712	*G3	C908	F5	C991	*F5	C1116	*F6	C1413	*A8	C1738	*C3	C2046	*A4	C2142	*A4	C2319	*C6	C2629	*E3	C045	G6	CL401	B2	CN1400	A7	FB1401	A7
C114	*E3	C311	*B6	C553	*F2	C713	F4	C909	F5	C992	F5	C1117	*E6	C1414	*A8	C1739	*C3	C2047	*A4	C2143	*A5	C2320	*C5	C2630	D3	C046	G6	CL601	F1	CN1900	B1	FB1402	A7
C115	E2	C312	A6	C554	G1	C714	G4	C910	F5	C993	F5	C1118	*E6	C1415	A8	C1740	*B3	C2048	*A4	C2144	*A4	C2321	*C5	C2631	D3	C047	G6	CL602	G2	CN2000	A2	FB1403	A7
C116	*D2	C313	A6	C555	F2	C715	*G3	C911	*E5	C994	F5	C1119	*F6	C1416	A7	C1741	*C3	C2049	*A4	C2145	*A4	C2322	D6	C2632	E3	C048	G3	CL603	F1	CN2001	A3	FB1404	A7
C117	*D2	C314	A6	C556	G2	C716	*G3	C912	F5	C995	F4	C1120	*F6	C1417	A7	C1742	*C3	C2050	*A5	C2146	*A4	C2323	D6	C2633	E3	C049	G3	CL604	G2	CN2002	A4	FB1405	A7
C118	*D2	C315	*A6	C557	G2	C717	*G3	C913	F5	C996	F4	C1121	*E6	C1418	A7	C1743	*C3	C2051	G1	C2147	*B5	C2324	D5	C2634	*D3	C050	G5	CL700	G3	CN2050	G1	FB1800	*C6
C119	*D3	C316	*A6	C600	G1	C718	*G3	C914	F5	C997	F4	C1122	*F6	C1420	*A8	C1744	*B3	C2052	*B5	C2148	*B5	C2325	D5	C2635	*D3	C051	G3	CL701	G3	CN2600	D5	FB1801	*C6
C120	*D3	C317	*A6	C601	G3	C719	*G3	C915	*F4	C998	F4	C1123	E6	C1421	A7	C1745	*C3	C2053	*A5	C2149	B5	C2326	D5	C2636	*E3	C052	G6	CL702	G3	CN2601	D7	FB1802	*C6
C121	D3	C318	B6	C602	G1	C720	*G3	C916	E5	C999	F5	C1124	E6	C1422	A7	C1746	*B3	C2054	*A5	C2150	*A3	C2327	D6	C2637	*D3	C053	G5	CL703	G3	CN2700	E1	FB1900	B3
C122	E3	C319	B6	C603	G3	C721	*G3	C917	E5	C1000	F5	C1125	F6	C1423	A7	C1747	*C4	C2055	*A5	C2151	*B3	C2328	D6	C2638	D5	C054	G3	CL704	G3	CN2701	B6	FB1901	*B3
C123	E3	C320	A6	C604	*G1	C722	*G3	C918	F5	C1001	F5	C1126	F6	C1424	A7	C1748	*C3	C2056	*A5	C2152	B5	C2329	D5	C2639	D5	C056	G6	CL705	G3	CN2702	C1	FB2000	A2
C124	E3	C321	A6	C605	*G3	C723	*F3	C919	E5	C1002	F5	C1127	E6	C1425	A7	C1749	*B3	C2057	*A5	C2154	*A5	C2330	D5	C2640	*D6	C058	G6	CL706	F4	CN2703	C6	FB2001	A2
C125	*E3	C322	B6	C606	*G2	C724	G3	C920	F5	C1003	G5	C1128	F6	C1426	A7	C1750	*B4	C2058	A5	C2155	A5	C2331	D5	C2641	*D6	C059	C7	CL707	F4	CN2704	G7	FB2002	A3
C126	*E2	C323	A6	C607	*G1	C725	*G3	C921	E5	C1004	G5	C1129	E7	C1600	D3	C1751	*C4	C2059	*A5	C2156	*B3	C2332	*D6	C2642	*D6	C060	B7	CL708	F4			FB2003	A5
C127	*E2	C324	A6	C608	*G2	C726	*G3	C922	F5	C1005	G5	C1130	F7	C1601	*D3	C1752	*C3	C2060	*B5	C2157	*B3	C2333	*D6	C2643	D6	C061	C7	CL709	G3	D100	*C7	FB2004	A3
C128	*D2	C325	A6	C609	*G1	C727	F3	C923	F5	C1006	G5	C1131	E7	C1602	D3	C1753	*C3	C2061	*B4	C2158	A3	C2334	*D6	C2644	*E6	C062	C7	CL710	G3	D101	*C7	FB2005	A5
C129	*D2	C400	A3	C610	*G2	C728	F3	C924	*F4	C1007	F4	C1132	*E7	C1603	*D3	C1754	*C3	C2062	B3	C2159	*A5	C2335	*D5	C2645	*E6	C063	*F6	CL800	G2	D102	D3	FB2006	A4
C130	*E2	C401	A2	C611	*G2	C729	F3	C925	*G7	C1050	*F5	C1133	*E7	C1604	C3	C1755	*C3	C2063	*A4	C2200	A7	C2336	*D6	C2646	*D6	C064	*E4	CL801	F2	D200	*A1	FB2007	A4
C131	*D2	C402	*D1	C612	G2	C730	*F3	C926	E5	C1051	*F5	C1134	F7	C1605	*C3	C1756	*C3	C2064	*B4	C2201	*A8	C2337	*D5	C2647	*E6	C065	*E4	CL802	F3	D201	A2	FB2008	*A4
C132	D2	C403	B3	C613	G1	C731	*F3	C927	E5	C1052	F5	C1135	*F7	C1606	C3	C1757	C3	C2065	*B4	C2202	A8	C2338	*D5	C2648	*D6	C066	B7	CL900	G7	D600	*G2	FB2009	A4
C133	D3	C404	A2	C614	*F1	C732	F2	C928	E5	C1053	F5	C1136	*F7	C1607	*C3	C1758	*C3	C2067	*B4	C2203	A8	C2339	*D5	C2649	E4	C067	B7	CL901	E5	D601	G1	FB2010	*A4
C134	D3	C405	B2	C615	*G2	C733	*F3	C929	E5	C1054	F5	C1137	*E6	C1608	C3	C1800	*C6	C2068	*B4	C2204	*C5	C2340	*D5	C2650	E4	C068	*F5	CL902	E5	D602	*F1	FB2011	*A4
C135	E3	C406	B2	C616	G2	C734	F3	C930	E5	C1055	F5	C1138	*E6	C1609	*C3	C1801	*C6	C2070	*B4	C2205	A8	C2341	*D5	C2651	*E5	C069	B7	CL903	G7	D603	*G2	FB2013	A4
C136	*E3	C407	F2	C617	F1	C735	*F3	C931	E5	C1056	*F5	C1139	*F6	C1610	C3	C1802	*B6	C2071	*B4	C2206	C5	C2342	*D5	C2652	*D5	C070	B7	CL904	G7	D604	G1	FB2050	G1
C137	*E3	C408	*D1	C618	F1	C736	*F3	C932	*G7	C1057	F5	C1140	*F6	C1611	*C3	C1900	B3	C2073	*B4	C2207	C5	C2343	*D5	C2653	*E5	C071	B7	CL905	F5	D605	*G2	FB2200	C5
C138	*E3	C409	A2	C619	G2	C737	*F3	C933	*G7	C1058	*F5	C1141	*E7	C1612	D3	C1901	*B3	C2074	*B4	C2211	C4	C2344	*D5	C2654	*E5	C072	*F5	CL906	F4	D606	*G1	FB2201	C5
C139	D3	C410	*E1	C620	F1	C738	F3	C934	F7	C1059	F5	C1142	*E7	C1613	*D3	C1902	B3	C2076	*B4	C2212	*C4	C2345	*D5	C2655	*E5	C073	*G5	CL907	F4	D607	*G3	FB2300	*C6
C140	*D3	C411	E2	C621	G2	C739	F3	C935	F8	C1060	*F5	C1143	*F7	C1614	D3	C1903	*B3	C2077	*B4	C2213	*C5	C234											

IC101	D2	IC615	G2	IC2000	B4	L603	* G2	L2308	* D5	Q908	* F7	Q2452	* D6	R141	D2	R407	A2	R613	G2	R706	F3	R922	F7	R1005	* F7	R1108	F6	R1191	* F6	R1274	* E7	R1407	A7
IC102	D2	IC616	* G2	IC2001	A3	L604	* G2	L2309	* D6	Q1050	* E6	Q2453	* D6	R142	* E3	R408	A2	R614	G2	R707	F3	R923	* G7	R1006	* F7	R1109	F6	R1192	* E6	R1275	* F7	R1408	A7
IC103	* C7	IC617	G2	IC2002	A3	L605	* F1	L2310	* D5	Q1051	* F6	Q2454	* D7	R143	* E3	R411	A3	R615	G2	R708	F3	R924	* G7	R1007	F5	R1110	* E6	R1193	* F6	R1276	* F7	R1409	A7
IC105	* D3	IC618	G1	IC2003	A5	L606	G2	L2311	* D5	Q1052	* E6	Q2455	* D7	R144	* D3	R412	D2	R616	G2	R709	G3	R925	G7	R1008	F5	R1111	* F6	R1194	E7	R1277	* F7	R1410	A7
IC106	* D2	IC622	* G2	IC2004	A2	L607	* F1	L2450	* C7	Q1053	* F6	Q2456	* D7	R145	D3	R413	D2	R617	G2	R710	F3	R926	G7	R1009	F5	R1112	* E6	R1195	F7	R1278	F7	R1411	A7
IC107	* D2	IC623	G3	IC2005	A4	L608	* G1	L2451	* C7	Q1054	E7	Q2457	* D7	R146	D3	R414	D2	R618	F1	R711	F3	R927	E5	R1010	F5	R1113	* F6	R1196	* F6	R1279	* F7	R1412	A7
IC108	* D3	IC625	* G3	IC2006	A4	L609	* G2	L2455	* D7	Q1055	F7	Q2600	D4	R148	* D3	R415	D1	R619	F1	R712	F3	R928	* G7	R1011	F5	R1114	* F5	R1197	* E6	R1280	* F7	R1413	A7
IC109	D2	IC626	G2	IC2007	A4	L610	G2	L2456	* D7	Q1056	* E6	Q2601	D4	R149	D2	R416	D1	R620	F1	R713	F3	R929	E5	R1012	F4	R1115	* F5	R1198	E6	R1300	E6	R1414	A7
IC110	D2	IC700	F3	IC2008	* A4	L612	* G3	L2457	* D7	Q1057	* F6	Q2602	E4	R150	D2	R417	D1	R621	F1	R714	F3	R930	E5	R1013	F4	R1116	* F5	R1199	F6	R1301	E6	R1415	A7
IC111	* E3	IC701	G4	IC2009	* A4	L613	G3	L2458	* D7	Q1058	E6	Q2603	E4	R151	D2	R418	D1	R622	* G2	R715	F3	R931	* G7	R1014	F4	R1117	* F5	R1200	E6	R1302	E6	R1416	A7
IC112	* C7	IC702	G3	IC2010	* A4	L700	* F3	L2459	* D7	Q1059	F6	Q2611	E4	R152	D2	R419	C1	R623	* G2	R716	F3	R932	G7	R1015	F4	R1118	F6	R1201	F6	R1303	* E6	R1418	* F3
IC113	D2	IC703	F3	IC2011	A4	L701	* G3	L2460	* D7	Q1060	E7	Q2612	* E5	R153	D2	R420	E1	R624	* G2	R717	F3	R933	E5	R1016	F4	R1119	F6	R1202	E6	R1304	* E6	R1419	* A7
IC114	D2	IC704	F3	IC2050	* A5	L702	* F3	L2600	D4	Q1061	F7	Q2613	* D5	R154	* E2	R500	F1	R625	G2	R718	F3	R934	E5	R1017	F5	R1120	E6	R1203	E6	R1305	* E6	R1420	* A7
IC115	* E2	IC705	F4	IC2051	* B5	L703	* F3	L2601	D4	Q1062	F7	Q2614	* E5	R155	* D2	R501	F1	R626	* G2	R719	F3	R935	* G7	R1018	F4	R1121	F6	R1204	F6	R1306	* E6	R1421	* A7
IC200	E3	IC706	F4	IC2052	* A5	L800	F3	L2602	D5	Q1063	F7	Q2615	* D5	R156	* F6	R503	F1	R627	F1	R720	F3	R936	E5	R1019	F5	R1122	F6	R1205	E7	R1307	* E6	R1422	F3
IC201	E2	IC707	C4	IC2054	* A5	L801	F3	L2603	E5	Q1064	* E6			R157	* F6	R504	F1	R628	F1	R721	F3	R937	E5	R1020	G5	R1123	F6	R1206	F7	R1308	* E6	R1423	F3
IC202	* E2	IC708	F3	IC2055	* A5	L802	* F3	L2604	E5	Q1065	* E6			R158	D3	R505	F1	R629	* G2	R722	F4	R938	* G7	R1021	G5	R1124	* E6	R1207	F6	R1309	* E6	R1424	* A8
IC203	* D3	IC709	F3	IC2056	* A5	L803	* F3	L2605	E3	Q1066	* F6			R159	F6	R506	F1	R630	* G2	R723	F3	R939	* G7	R1022	G5	R1125	* F6	R1208	E7	R1310	* E6	R1425	* A8
IC204	* E1	IC710	F4	IC2057	A5	L804	* G3	L2606	* E3	Q1067	* F6			R160	* F7	R507	F1	R631	G2	R724	F3	R940	* G7	R1023	F5	R1126	* E6	R1209	F7	R1311	* E6	R1426	* A7
IC205	E1	IC711	F2	IC2058	* B3	L805	* G3	L2607	* D3	Q1068	* E7			R161	* F7	R508	F1	R632	* G2	R725	F3	R941	* G7	R1024	G5	R1127	* F6	R1210	E6	R1312	* E6	R1427	* A7
IC206	E2	IC712	F3	IC2059	A3	L900	* G7	L2608	* E6	Q1069	* E7			R162	F6	R514	F1	R633	* G2	R726	F3	R942	* G7	R1025	G4	R1128	E6	R1211	E7	R1313	* E6	R1428	F3
IC207	E3	IC713	F3	IC2200	C5	L901	* G7	L2609	* D6	Q1070	* F7			R200	E2	R515	F2	R634	F1	R727	F3	R943	* G7	R1026	G4	R1129	F6	R1212	F6	R1314	* E6	R1429	* A7
IC208	* E3	IC714	F3	IC2204	* C5	L1050	* F7	L2610	E4	Q1071	* F7			R201	E3	R516	F2	R635	* F1	R728	F3	R944	* G7	R1027	F4	R1130	E6	R1213	F7	R1315	* E6	R1430	F3
IC209	A1	IC800	F3	IC2205	* C5	L1051	* E7	L2611	* D5	Q1072	E7			R202	* D3	R517	F1	R636	G1	R729	F3	R945	* G7	R1029	* F7	R1131	* E6	R1214	F7	R1316	* E6	R1431	* F3
IC210	* D3	IC801	F3	IC2206	C5	L1052	* E7	L2612	* E5	Q1073	F7			R203	* D3	R518	F1	R637	* F1	R730	F3	R946	E5	R1030	* F7	R1132	F6	R1215	F7	R1317	E6	R1432	* A8
IC211	* A1	IC802	* F3	IC2207	* C5	L1053	* E7			Q1074	* F7			R204	* D3	R519	F1	R638	F1	R731	F4	R947	E5	R1050	* F5	R1133	* E6	R1216	E6	R1318	E6	R1433	* F3
IC212	* A1	IC804	* E3	IC2208	* C5	L1054	* F7	L001	G4	Q1075	E7			R205	D2	R520	F2	R639	G1	R733	G4	R948	* G7	R1051	* F5	R1134	* F6	R1217	F6	R1319	E6	R1434	* F3
IC213	* A1	IC805	* F3	IC2209	* B5	L1055	* F7	L002	G6	Q1076	F7			R206	D2	R521	F2	R640	G2	R734	G4	R949	* G7	R1052	F5	R1135	* F6	R1218	F7	R1320	E6	R1435	* A7
IC300	A6	IC806	* F3	IC2210	A8	L1300	* F3	L003	B7	Q1077	* E7			R207	A1	R522	F1	R641	G2	R800	* F3	R950	* G7	R1053	F5	R1136	* F6	R1219	E7	R1324	* F3	R1436	* A7
IC301	* A6	IC900	F5	IC2211	A8	L1400	* A6	L004	B7	Q1078	* E7			R210	A1	R523	F2	R642	G2	R801	* F3	R951	* G7	R1054	F5	R1137	* E6	R1220	F7	R1325	* F3	R1437	* F3
IC302	* E2	IC901	F5	IC2213	* C6	L1401	A7	L005	G5	Q1079	* F7			R211	* A1	R524	F1	R643	F1	R802	* F3	R952	* G7	R1055	* F5	R1138	* E6	R1221	F7	R1326	* F3	R1438	* A8
IC303	* E2	IC902	F5	IC2300	C4	L1402	A7	L006	G3	Q1080	* F7			R212	* A1	R525	F2	R644	F1	R804	F3	R953	E5	R1056	* F5	R1139	* F6	R1222	E7	R1327	E7	R1439	* A8
IC304	* A6	IC903	F5	IC2301	C6	L1600	D3	L007	G4	Q1081	* E7			R213	A1	R526	F1	R645	F1	R805	F3	R954	E5	R1057	F5	R1140	* E6	R1223	E7	R1328	E7	R1440	* A8
IC400	B3	IC904	* E5	IC2302	C5	L1601	* D3	L008	G6	Q1082	* F7			R214	A2	R527	F1	R646	G1	R806	G3	R955	G8	R1058	F5	R1141	* F6	R1224	F7	R1329	E7	R1441	* A8
IC401	F2	IC905	* E5	IC2303	C5	L1602	* C2	L009	G5	Q1083	* F7			R215	A2	R528	F1	R647	G1	R807	G3	R956	* E5	R1059	* F5	R1142	* E6	R1225	F7	R1330	E7	R1442	* A8
IC402	* E1	IC906	F5	IC2304	D6	L1603	C2	L010	G6	Q1084	* E7			R216	A2	R529	F2	R648	G1	R808	F3	R957	* E5	R1060	F5	R1143	* F6	R1226	E7	R1331	* F3	R1443	* A8
IC403	A2	IC907	* E5	IC2305	D5	L1700	* C4	L011	G3	Q1085	* F7			R217	C2	R530	F1	R649	G1	R809	F3	R958	* E5	R1061	F5	R1144	* E6	R1227	F7	R1332	E7	R1444	* A8
IC404	E2	IC908	* G7	IC2306	D5	L1701	* C4	L012	G5	Q1086	* F7			R218	D2	R531	F1	R650	F1	R810	F3	R959	* E5	R1062	F5	R1145	* F6	R1228	* E6	R1333	E7	R1445	* A8
IC405	* E1	IC909	E5	IC2307	D5	L1702	C4	L013	G3	Q1087	* E7			R219	C2	R532	F1	R651	G1	R811	F3	R960	G7	R1063	F5	R1146	* E6	R1229	* E6	R1334	E7	R1446	* A8
IC406	E2	IC910	E5	IC2308	D5	L1703	* C3	L014	G6	Q1088	E7			R300	A6	R533	F1	R652	* F1	R812	F3	R961	G8	R1064	F5	R1147	* F6	R1230	* F6	R1335	E7	R1447	A7
IC407	* D1	IC911	E5	IC2450	* C7	L1704	* B4	L016	G6	Q1089	* F7			R301	A6	R534	F2	R653	* F1	R813	F3	R962	G7	R1065	F5	R1148	* E6	R1231	* F6	R1336	* F3	R1448	B7
IC408	* D1	IC912	G7	IC2451	* D6	L1705	C3	L017	* E4	Q1090	F7			R302	A6	R535	G2	R654	* F1	R814	* E3	R963	G7	R1066	F5	R1149	* F6	R1232	* E7	R1337	* E7	R1449	A7
IC409	C1	IC913	G7	IC2452	* D6	L2000	A2	L018	B7	Q1091	E7			R303	A6	R536	G1	R655	* F1	R815	* F3	R964	G8	R1067	F5	R1150	* E6	R1233	* E7	R1338	* E7	R1450	A7
IC410	D1	IC914	F5	IC2453	D7	L2001	A2	L019	B7	Q1092	F7			R304	A6	R537	F1	R656	* G3	R816	* F3	R965	E5	R1068	F5	R1151	* F6	R1234	* F7	R1339	* E7	R1451	A8
IC411	D1	IC915	G5	IC2454	D7	L2002	A3	L020	* B7	Q1093	* E7			R305	A6	R538	G2	R662	G2	R818	* F3	R966	E5	R1069	F5	R1152	* E6	R1235	* F7	R1340	* E7	R1500	* B3
IC412	C1	IC1050	F5	IC2455	D7	L2003	A3	L021	G6	Q1094	* E7			R306	A6	R539	F2	R663	F1	R819	F3	R967	* E5	R1070	F5	R1153	* E6	R1236	* E6	R1341	E7	R1501	C4
IC413	D2	IC1051	F5	IC2456	* D7	L2004	A5	L022	E3	Q1095	* F7			R307	A6	R540	G2	R664	* G2	R820	* E3	R968	* E5	R1071	F5	R1154	* F6	R1237	* E6	R1342	E7	R1502	* B3
IC414	A2	IC1052	F5	IC2457	* D7	L2005	A5	L023	E3	Q1096	* E7			R308	A6	R541	F2	R669	* G2	R821	* F3	R969	* E5	R1072	F5	R1155	* F6	R1238	* F6	R1343	* F3	R1503	* B3

R1720	* B3	R2022	A3	R2218	A8	R2304	C5	R2387	D5	R2516	D7	R2633	E5	R032	G3	RB120	* E3	RB701	* G4	RB1607	* C3	RB2216	* C5	TP701	F4	DPR361 [-12] 1-889-636-12 *: B SIDE BT100C7 C100 * C7 C101 * D2 C102 * D3 C103 D2 C104 * D3 C105 * D3 C106 C7 C107 * C7 C108 D2 C109 D2 C110 D2 C111 * C7 C112 * E3 C114 * E3 C115 E2 C116 * D2 C117 * D2 C118 * D2 C119 * D3 C120 * D3 C121 D3 C122 E3 C123 E3 C124 E3 C125 * E3 C126 * E2 C127 * E2 C128 * D2 C129 * D2 C130 * E2 C131 * D2 C132 D2 C133 D3 C134 D3 C135 E3 C136 * E3 C137 * E3 C138 * E3 C139 D3 C140 * D3 C141 D2 C142 D2 C143 D2 C144 * D2 C145 F6 C146 * F6 C147 * F7 C148 * F7 C149 F6 C150 * F6 C151 F7 C152 * F7 C200 F3 C201 * D3 C202 * E2 C203 * F2 C204 * D3 C205 * E1 C206 E1 C207 * E1 C208 E1 C209 * E1 C210 E1 C211 * E1 C212 E1 C213 * F1 C214 F1 C215 * E2 C216 E1 C217 * E2 C218 E1 C219 E2 C220 E3 C221 E3 C222 * E3 C223 * A1 C224 * A1 C225 * A1 C226 * A1 C227 * A1 C228 A1 C229 * A1 C230 A1 C231 D2 C232 D2 C300 * E2 C301 * E2 C302 A6 C303 A6 C304 A6 C305 A6 C306 A6 C307 * A6 C308 A6 C309 A6 C310 A6 C311 * B6 C312 A6 C313 A6 C314 A6 C315 * A6 C316 * A6 C317 * A6 C318 B6 C319 B6 C320 A6 C321 A6 C322 B6 C323 A6 C324 A6 C325 A6 C400 A3 C401 A2 C402 * D1 C403 B3 C404 A2 C405 B2 C406 B2 C407 F2 C408 * D1 C409 A2 C410 * E1 C411 E2 C412 E2 C413 * E1 C414 D2 C415 D1 C416 * E1 C417 D1 C418 D1 C419 C2 C420 D1 C421 D1 C422 C1 C423 D1 C500 F1 C501 F1 C502 F1 C503 F1 C507 F1 C508 F1 C509 F1 C510 F2 C512 F2 C513 * F2 C514 F2 C515 F1 C516 F2 C517 F1 C520 F1 C521 F1 C522 F2 C523 F2 C524 F2 C525 F2 C526 F1 C527 F2 C528 F1 C529 F1 C530 F2 C531 F2 C534 F2 C535 F1 C536 F1 C537 F1 C538 G1 C539 G1 C540 G2 C541 F2 C542 G1 C544 F2 C545 G1 C546 F2 C547 F2 C548 F2 C549 F1 C550 F1 C551 F1 C552 F2 C553 * F2 C554 G1 C555 F2 C556 G2 C557 G2 C600 G1 C601 G3 C602 G1 C603 G3 C604 * G1 C605 * G3 C606 * G2 C607 * G1 C608 * G2 C609 * G1 C610 * G2 C611 * G2 C612 G2 C613 G1 C614 * F1 C615 * G2 C616 G2 C617 F1 C618 F1 C619 G2 C620 F1 C621 G2 C622 * F1 C623 G2 C624 F1 C625 * F1 C626 * F1 C627 F1 C628 G1 C629 F1 C630 * G1 C631 * G1 C632 G1 C633 G1 C638 G2 C639 * G2 C640 * G2 C641 G2 C642 G2 C643 G2 C644 G1 C645 G1 C646 * G2 C647 G1 C648 G1 C649 G1 C650 G1 C651 * G3 C652 * G3 C653 G2 C654 G2 C655 * G3 C656 G2 C657 G2 C658 * G2 C659 G3 C660 G3 C662 G3 C663 G2 C664 G2 C665 * G3 C666 G2 C667 G2 C668 * G2 C669 G3 C670 G3 C671 G2 C672 G2 C673 G2 C674 G3 C675 G3 C676 * F1 C677 * F1 C700 F4 C701 G4 C702 G4 C703 G4 C704 G4 C705 G4 C706 G4 C707 G4 C708 G4 C709 G4 C710 F4 C711 G4 C712 * G3 C713 F4 C714 G4 C715 * G3 C716 * G3 C717 * G3 C718 * G3 C719 * G3 C720 * G3 C721 * G3 C722 * G3 C723 * F3 C724 G3 C725 * G3 C726 * G3 C727 F3 C728 F3 C729 F3 C730 * F3 C731 * F3 C732 F2 C733 * F3 C734 F3 C735 * F3 C736 * F3 C737 * F3 C738 F3 C739 F3 C740 F3 C741 F3 C742 F3 C743 F3 C744 F3 C745 F3 C746 * F3 C747 C4 C748 F4 C749 F4 C750 F3 C751 F3 C800 * F3 C801 F3 C802 * F3 C803 E3 C804 * E3 C805 * E3 C807 * F3 C808 * F3 C809 * F3 C810 * F3 C813 * F3 C814 * F3 C817 F3 C818 * F3 C819 * F3 C820 * F3 C821 * F3 C822 * F3 C823 * F3 C824 * F3 C825 * F3 C826 * F3 C837 * F3		
R1721	* C3	R2023	A3	R2219	A8	R2305	C5	R2388	D6	R2517	D7	R2634	D3	R033	G3	RB121	* E3	RB702	* G4	RB1608	D3	RB2217	C6	TP702	F4		C224	* A1
R1722	* C3	R2024	A2	R2220	C5	R2306	C5	R2389	D6	R2518	D7	R2635	E5	R034	G3	RB122	* C7	RB703	* G4	RB1609	D3	RB2218	C6	TP800	F2		C225	* A1
R1723	* C3	R2025	A2	R2221	C4	R2307	C5	R2390	D5	R2519	D7	R2636	E3	R035	G6	RB200	* E2	RB704	* G3	RB1610	C3	RB2300	C5	TP801	F2		C226	* A1
R1800	* B4	R2026	A3	R2222	C4	R2308	C4	R2391	D5	R2520	D7	R2637	E3	R038	G5	RB201	* E2	RB705	G3	RB1611	C3	RB2301	C6	TP802	F2		C227	* A1
R1801	* B4	R2027	A3	R2223	* C5	R2309	C5	R2392	D5	R2521	* D7	R2639	D3	R039	G5	RB202	* D3	RB706	G3	RB1612	D3	RB2302	C6	TP803	F2		C228	A1
R1802	* B4	R2028	A5	R2224	* C5	R2310	C6	R2393	D5	R2522	* D7	R2640	D3	R040	G3	RB203	* E2	RB707	G3	RB1613	D3	RB2303	C5	TP1050	F5		C229	* A1
R1803	* B4	R2029	A5	R2225	C4	R2311	C5	R2394	D5	R2523	* D7	R2641	E3	R041	G3	RB204	A1	RB708	F3	RB1614	C3	RB2304	C5	TP1051	F5		C230	A1
R1804	* B4	R2030	A3	R2226	A8	R2312	C5	R2395	D5	R2524	* D7	R2644	E3	R042	G3	RB205	* D3	RB709	* F3	RB1615	C3	RB2305	C5	TP1400	* B1		C231	D2
R1807	* B4	R2031	A3	R2227	A8	R2313	C5	R2396	D5	R2525	* D7	R2647	E3	R043	G6	RB206	A1	RB711	* G3	RB1616	* D3	RB2306	C5	TP1401	* B8		C232	D2
R1808	* B4	R2032	A5	R2228	* C4	R2314	C6	R2397	D5	R2526	* D7	R2648	E3	R044	G6	RB207	A1	RB713	F3	RB1617	* D3	RB2307	C5	TP1402	* F8		C300	* E2
R1809	* B4	R2033	A5	R2229	A8	R2315	C5	R2398	* C5	R2527	D7	R2651	* E3	R045	G6	RB300	A6	RB714	F3	RB1618	* C3	RB2308	C5	TP1403	* F1		C301	* E2
R1810	* B4	R2034	A3	R2230	A8	R2316	C5	R2399	* C5	R2528	D7	R2652	* E3	R049	C7	RB301	* B6	RB715	F3	RB1619	* C3	RB2450	* C7	TP1404	* G5		C302	A6
R1811	* B4	R2035	A5	R2231	A8	R2317	C5	R2400	* C5	R2529	* D7	R2653	E5	R050	* E4	RB302	B6	RB716	* F3	RB1620	* D3	RB2451	* C7	TP1405	* G3		C303	A6
R1812	* C6	R2036	A3	R2232	A8	R2318	C5	R2401	* C5	R2530	* D7	R2654	E5	R051	* G5	RB303	* B6	RB718	F3	RB1621	* D3	RB2452	* C7	TP1406	* D8		C304	A6
R1813	* C6	R2037	A3	R2233	A8	R2319	C6	R2402	* C5	R2531	* D7	R2655	E3	R052	* G5	RB400	A2	RB719	F3	RB1622	* C3	RB2453	* C7	TP1407	* D1		C305	A6
R1814	* C6	R2038	A5	R2234	* C5	R2320	C6	R2403	* C5	R2532	* D7	R2656	D3	R053	C7	RB401	* E1	RB720	F4	RB1623	* C3	RB2454	* C7	TP1408	* G8		C306	A6
R1815	* C6	R2039	A5	R2235	A8	R2321	C5	R2404	* C6	R2533	D7	R2658	* D6	R054	C7	RB402	* E1	RB721	F4	RB1624	* C2	RB2455	* C7	TP1409	* D4		C307	* A6
R1816	* C6	R2040	A3	R2236	A8	R2322	C5	R2405	* C6	R2><																		

C838	* F3	C971	* E5	C1096	* F5	C1322	* E7	C1718	* C3	C2025	A5	C2122	* B5	C2249	C5	C2607	E5	C025	G5	CL013	G5	CL2601	D3	D006	G3	IC101	D2	IC615	G2	IC2000	B4	L603	* G2
C839	* F3	C972	G7	C1097	* F5	C1323	* E7	C1719	* C3	C2026	A3	C2123	* B5	C2300	D4	C2608	E5	C026	B7	CL014	G5	CL2602	D3	D007	* F6	IC102	D2	IC616	* G2	IC2001	A3	L604	* G2
C843	* F3	C973	G8	C1098	* F5	C1324	* E7	C1720	* C3	C2027	A5	C2124	* B4	C2301	C6	C2609	E5	C027	G6	CL016	E4	CL2603	D3	D008	* F7	IC103	* C7	IC617	G2	IC2002	A3	L605	* F1
C844	* F3	C974	E5	C1099	F6	C1325	* E7	C1721	* C3	C2028	A3	C2125	A5	C2302	C5	C2610	E5	C028	G6	CL017	B7	CL2604	E3			IC105	* D3	IC618	G1	IC2003	A5	L606	G2
C845	* F3	C975	F6	C1100	F6	C1326	E7	C1722	* C3	C2029	A5	C2126	* B4	C2303	C5	C2611	E5	C029	G6	CL018	G6	CL2700	B6	E001	C4	IC106	* D2	IC622	* G2	IC2004	A2	L607	* F1
C849	* F3	C976	E5	C1101	* F5	C1327	E7	C1723	* C3	C2030	A3	C2127	* B4	C2304	* C5	C2612	E4	C030	G3	CL019	G6	CL2701	B6	E002	F4	IC107	* D2	IC623	G3	IC2005	A4	L608	* G1
C850	* F3	C977	E6	C1102	* F5	C1328	E7	C1724	* C4	C2031	A3	C2128	* B4	C2305	* C5	C2613	E4	C031	G5	CL020	F6	CL2702	B6	E003	F2	IC108	* D3	IC625	* G3	IC2006	A4	L609	* G2
C851	* F3	C978	E6	C1103	* E6	C1329	E7	C1725	* C3	C2032	A3	C2129	* B4	C2306	* C5	C2614	D4	C032	G5	CL021	F7	CL2703	B6	E004	C7	IC109	D2	IC626	G2	IC2007	A4	L610	G2
C855	* F3	C979	E6	C1104	* F6	C1400	A7	C1726	* C3	C2033	A5	C2130	* B4	C2307	C6	C2615	D4	C033	G3	CL100	D2			E005	* E4	IC110	D2	IC700	F3	IC2008	* A4	L612	* G3
C856	* F3	C980	E6	C1105	* E6	C1401	A7	C1727	* C3	C2034	A5	C2131	* B3	C2308	C6	C2616	* D3	C034	G5	CL101	D2	CN001	G7	E006	* F1	IC111	* E3	IC701	G4	IC2009	* A4	L613	G3
C857	* F3	C981	E6	C1106	* E6	C1402	B7	C1728	C4	C2035	A5	C2132	* B4	C2309	C5	C2617	D3	C035	G5	CL102	D2	CN002	F7	E007	* B6	IC112	* C7	IC702	G3	IC2010	* A4	L700	* F3
C858	* F3	C982	F7	C1107	* F6	C1403	A7	C1729	* C3	C2036	* A4	C2133	* B4	C2310	C5	C2618	E3	C036	G4	CL103	D2	CN003	G6	E008	* D5	IC113	D2	IC703	F3	IC2011	A4	L701	* G3
C900	F5	C983	F7	C1108	* F6	C1404	A7	C1730	C4	C2037	* A4	C2134	* B4	C2311	C5	C2619	E3	C037	G6	CL104	D2	CN100	B2			IC114	D2	IC704	F3	IC2050	* A5	L702	* F3
C901	F5	C984	E6	C1109	F6	C1405	A7	C1731	* C3	C2038	A4	C2135	* B4	C2312	C5	C2620	E3	C038	G4	CL105	D3	CN101	G2	FB001	G7	IC115	* E2	IC705	F4	IC2051	* B5	L703	* F3
C902	F5	C985	E6	C1110	F6	C1406	A7	C1732	* C3	C2039	A4	C2136	* B4	C2313	* C5	C2621	E3	C039	G5	CL200	D3	CN102	G3	FB500	F1	IC200	E3	IC706	F4	IC2052	* A5	L800	F3
C903	F5	C986	E6	C1111	F6	C1407	F3	C1733	* C4	C2040	* A4	C2137	* B4	C2314	* C5	C2622	D3	C040	G6	CL201	E1	CN200	A1	FB600	* F1	IC201	E2	IC707	C4	IC2054	* A5	L801	F3
C904	F5	C987	E6	C1112	F6	C1408	* A6	C1734	* B4	C2041	A4	C2138	* B4	C2315	* C5	C2623	E3	C041	G5	CL202	E3	CN201	D2	FB601	* G1	IC202	* E2	IC708	F3	IC2055	* A5	L802	* F3
C905	F5	C988	E6	C1113	F6	C1409	* A6	C1735	* C3	C2042	* A4	C2139	* B4	C2316	* C6	C2625	E5	C042	G6	CL203	A1	CN300	A6	FB602	G2	IC203	* D3	IC709	F3	IC2056	* A5	L803	* F3
C906	F5	C989	E6	C1114	F6	C1410	* F3	C1736	* C3	C2043	* A4	C2140	* A4	C2317	* C5	C2627	* D3	C043	G5	CL300	A6	CN800	G2	FB800	* F3	IC204	* E1	IC710	F4	IC2057	A5	L804	* G3
C907	F5	C990	* E5	C1115	* E6	C1411	A8	C1737	* C3	C2045	A4	C2141	* A4	C2318	* C5	C2628	* E3	C044	G5	CL400	D2	CN1300	A8	FB1400	A7	IC205	E1	IC711	F2	IC2058	* B3	L805	* G3
C908	F5	C991	* F5	C1116	* F6	C1413	* A8	C1738	* C3	C2046	* A4	C2142	* A4	C2319	* C6	C2629	* E3	C045	G6	CL401	B2	CN1400	A7	FB1401	A7	IC206	E2	IC712	F3	IC2059	A3	L900	* G7
C909	F5	C992	F5	C1117	* E6	C1414	* A8	C1739	* C3	C2047	* A4	C2143	* A5	C2320	* C5	C2630	D3	C046	G6	CL601	F1	CN1900	B1	FB1402	A7	IC207	E3	IC713	F3	IC2200	C5	L901	* G7
C910	F5	C993	F5	C1118	* E6	C1415	A8	C1740	* B3	C2048	* A4	C2144	* A4	C2321	* C5	C2631	D3	C047	G6	CL602	G2	CN2000	A2	FB1403	A7	IC208	* E3	IC714	F3	IC2204	* C5	L1050	* F7
C911	* E5	C994	F5	C1119	* F6	C1416	A7	C1741	* C3	C2049	* A4	C2145	* A4	C2322	D6	C2632	E3	C048	G3	CL603	F1	CN2001	A3	FB1404	A7	IC209	A1	IC800	F3	IC2205	* C5	L1051	* E7
C912	F5	C995	F4	C1120	* F6	C1417	A7	C1742	* C3	C2050	* A5	C2146	* A4	C2323	D6	C2633	E3	C049	G3	CL604	G2	CN2002	A4	FB1405	A7	IC210	* D3	IC801	F3	IC2206	C5	L1052	* E7
C913	F5	C996	F4	C1121	* E6	C1418	A7	C1743	* C3	C2051	G1	C2147	* B5	C2324	D5	C2634	* D3	C050	G5	CL700	G3	CN2050	G1	FB1800	* C6	IC211	* A1	IC802	* F3	IC2207	* C5	L1053	* E7
C914	F5	C997	F4	C1122	* F6	C1420	* A8	C1744	* B3	C2052	* B5	C2148	* B5	C2325	D5	C2635	* D3	C051	G3	CL701	G3	CN2600	D5	FB1801	* C6	IC212	* A1	IC804	* E3	IC2208	* C5	L1054	* F7
C915	* F4	C998	F4	C1123	E6	C1421	A7	C1745	* C3	C2053	* A5	C2149	B5	C2326	D5	C2636	* E3	C052	G6	CL702	G3	CN2601	D7	FB1802	* C6	IC213	* A1	IC805	* F3	IC2209	* B5	L1055	* F7
C916	E5	C999	F5	C1124	E6	C1422	A7	C1746	* B3	C2054	* A5	C2150	* A3	C2327	D6	C2637	* D3	C053	G5	CL703	G3	CN2700	E1	FB1900	B3	IC300	A6	IC806	* F3	IC2210	A8	L1300	* F3
C917	E5	C1000	F5	C1125	F6	C1423	A7	C1747	* C4	C2055	* A5	C2151	* B3	C2328	D6	C2638	D5	C054	G3	CL704	G3	CN2701	B6	FB1901	* B3	IC301	* A6	IC900	F5	IC2211	A8	L1400	* A6
C918	F5	C1001	F5	C1126	F6	C1424	A7	C1748	* C3	C2056	* A5	C2152	B5	C2329	D5	C2639	D5	C056	G6	CL705	G3	CN2702	C1	FB2000	A2	IC302	* E2	IC901	F5	IC2213	* C6	L1401	A7
C919	E5	C1002	F5	C1127	E6	C1425	A7	C1749	* B3	C2057	* A5	C2154	* A5	C2330	D5	C2640	* D6	C058	G6	CL706	F4	CN2703	C6	FB2001	A2	IC303	* E2	IC902	F5	IC2300	C4	L1402	A7
C920	F5	C1003	G5	C1128	F6	C1426	A7	C1750	* B4	C2058	A5	C2155	A5	C2331	D5	C2641	* D6	C059	C7	CL707	F4	CN2704	G7	FB2002	A3	IC304	* A6	IC903	F5	IC2301	C6	L1600	D3
C921	E5	C1004	G5	C1129	E7	C1600	D3	C1751	* C4	C2059	* A5	C2156	* B3	C2332	* D6	C2642	* D6	C060	B7	CL708	F4			FB2003	A5	IC400	B3	IC904	* E5	IC2302	C5	L1601	* D3
C922	F5	C1005	G5	C1130	F7	C1601	* D3	C1752	* C3	C2060	* B5	C2157	* B3	C2333	* D6	C2643	D6	C061	C7	CL709	G3	D100	* C7	FB2004	A3	IC401	F2	IC905	* E5	IC2303	C5	L1602	* C2
C923	F5	C1006	G5	C1131	E7	C1602	D3	C1753	* C3	C2061	* B4	C2158	A3	C2334	* D6	C2644	* E6	C062	C7	CL710	G3	D101	* C7	FB2005	A5	IC402	* E1	IC906	F5	IC2304	D6	L1603	C2
C924	* F4	C1007	F4	C1132	* E7	C1603	* D3	C1754	* C3	C2062	B3	C2159	* A5	C2335	* D5	C2645	* E6	C063	* F6	CL800	G2	D102	D3	FB2006	A4	IC403	A2	IC907	* E5	IC2305	D5	L1700	* C4
C925	* G7	C1050	* F5	C1133	* E7	C1604	C3	C1755	* C3	C2063	* A4	C2200	A7	C2336	* D6	C2646	* D6	C064	* E4	CL801	F2	D200	* A1	FB2007	A4	IC404	E2	IC908	* G7	IC2306	D5	L1701	* C4
C926	E5	C1051	* F5	C1134	F7	C1605	* C3	C1756	* C3	C2064	* B4	C2201	* A8	C2337	* D5	C2647	* E6	C065	* E4	CL802	F3	D201	A2	FB2008	* A4	IC405	* E1	IC909	E5	IC2307	D5	L1702	C4
C927	E5	C1052	F5	C1135	* F7	C1606	C3	C1757	C3	C2065	* B4	C2202	A8	C2338	* D5	C2648	* D6	C066	B7	CL900	G7	D600	* G2	FB2009	A4	IC406	E2	IC910	E5	IC2308	D5	L1703	* C3
C928	E5	C1053	F5	C1136	* F7	C1607	* C3	C1758	* C3	C2067	* B4	C2203	A8	C2339	* D5	C2649	E4	C067	B7	CL901	E5	D601	G1	FB2010	* A4	IC407	* D1	IC911	E5	IC2450	* C7	L1704	* B4
C929	E5	C1054	F5	C1137	* E6	C1608	C3	C1800	* C6	C2068	* B4	C2204	* C5	C2340	* D5	C2650	E4	C068	* F5	CL902	E5	D602	* F1	FB2011	* A4	IC408	* D1	IC912	G7	IC2451	* D6	L1705	C3
C930	E5	C1055	F5	C1138	* E6	C1609	* C3	C1801	* C6	C2070	* B4	C2205	A8	C2341	* D5	C2651	* E5	C069	B7	CL903	G7	D603	* G2	FB2013	A4	IC409	C1	IC913	G7	IC2452	* D6	L2000	A2
C931	E5	C1056	* F5	C1139	* F6	C1610	C3	C1802	* B6	C2071	* B4	C2206	C5	C2342	* D5	C2652	* D5	C070	B7	CL904	G7	D604	G1	FB2050	G1	IC410	D1	IC914	F5	IC2453	D7	L2001	A2
C932	* G7	C1057	F5	C1140	* F6	C1611	* C3	C1900	B3	C2073	* B4	C2207	C5	C2343	* D5	C2653	* E5	C071	B7	CL905	F5	D605	* G2	FB2200	C5	IC411	D1	IC915	G5	IC2454	D7	L2002	A3
C933	* G7	C1058	* F5	C1141	* E7	C1612	D3	C1901	* B3	C2074	* B4	C2211	C4	C2344	* D5	C2654	* E5	C072	* F5	CL906	F4	D606	* G1	FB2201	C5	IC412	C1	IC1050	F5	IC2455	D7	L2003	A3
C934	F7	C1059	F5	C1142	* E7	C1613	* D3	C1902	B3	C2076	* B4	C2212	* C4	C2345	* D5	C2655	* E5	C073	* G5	CL907	F4	D607	* G3	FB2300	* C6	IC413							

L2308	* D5	Q908	* F7	Q2452	* D6	R141	D2	R407	A2	R613	G2	R706	F3	R922	F7	R1005	* F7	R1108	F6	R1191	* F6	R1274	* E7	R1407	A7	R1719	B3	R2021	A2	R2217	A8	R2303	C5
L2309	* D6	Q1050	* E6	Q2453	* D6	R142	* E3	R408	A2	R614	G2	R707	F3	R923	* G7	R1006	* F7	R1109	F6	R1192	* E6	R1275	* F7	R1408	A7	R1720	* B3	R2022	A3	R2218	A8	R2304	C5
L2310	* D5	Q1051	* F6	Q2454	* D7	R143	* E3	R411	A3	R615	G2	R708	F3	R924	* G7	R1007	F5	R1110	* E6	R1193	* F6	R1276	* F7	R1409	A7	R1721	* C3	R2023	A3	R2219	A8	R2305	C5
L2311	* D5	Q1052	* E6	Q2455	* D7	R144	* D3	R412	D2	R616	G2	R709	G3	R925	G7	R1008	F5	R1111	* F6	R1194	E7	R1277	* F7	R1410	A7	R1722	* C3	R2024	A2	R2220	C5	R2306	C5
L2450	* C7	Q1053	* F6	Q2456	* D7	R145	D3	R413	D2	R617	G2	R710	F3	R926	G7	R1009	F5	R1112	* E6	R1195	F7	R1278	F7	R1411	A7	R1723	* C3	R2025	A2	R2221	C4	R2307	C5
L2451	* C7	Q1054	E7	Q2457	* D7	R146	D3	R414	D2	R618	F1	R711	F3	R927	E5	R1010	F5	R1113	* F6	R1196	* F6	R1279	* F7	R1412	A7	R1800	* B4	R2026	A3	R2222	C4	R2308	C4
L2455	* D7	Q1055	F7	Q2600	D4	R148	* D3	R415	D1	R619	F1	R712	F3	R928	* G7	R1011	F5	R1114	* F5	R1197	* E6	R1280	* F7	R1413	A7	R1801	* B4	R2027	A3	R2223	* C5	R2309	C5
L2456	* D7	Q1056	* E6	Q2601	D4	R149	D2	R416	D1	R620	F1	R713	F3	R929	E5	R1012	F4	R1115	* F5	R1198	E6	R1300	E6	R1414	A7	R1802	* B4	R2028	A5	R2224	* C5	R2310	C6
L2457	* D7	Q1057	* F6	Q2602	E4	R150	D2	R417	D1	R621	F1	R714	F3	R930	E5	R1013	F4	R1116	* F5	R1199	F6	R1301	E6	R1415	A7	R1803	* B4	R2029	A5	R2225	C4	R2311	C5
L2458	* D7	Q1058	E6	Q2603	E4	R151	D2	R418	D1	R622	* G2	R715	F3	R931	* G7	R1014	F4	R1117	* F5	R1200	E6	R1302	E6	R1416	A7	R1804	* B4	R2030	A3	R2226	A8	R2312	C5
L2459	* D7	Q1059	F6	Q2611	E4	R152	D2	R419	C1	R623	* G2	R716	F3	R932	G7	R1015	F4	R1118	F6	R1201	F6	R1303	* E6	R1418	* F3	R1807	* B4	R2031	A3	R2227	A8	R2313	C5
L2460	* D7	Q1060	E7	Q2612	* E5	R153	D2	R420	E1	R624	* G2	R717	F3	R933	E5	R1016	F4	R1119	F6	R1202	E6	R1304	* E6	R1419	* A7	R1808	* B4	R2032	A5	R2228	* C4	R2314	C6
L2600	D4	Q1061	F7	Q2613	* D5	R154	* E2	R500	F1	R625	G2	R718	F3	R934	E5	R1017	F5	R1120	E6	R1203	E6	R1305	* E6	R1420	* A7	R1809	* B4	R2033	A5	R2229	A8	R2315	C5
L2601	D4	Q1062	F7	Q2614	* E5	R155	* D2	R501	F1	R626	* G2	R719	F3	R935	* G7	R1018	F4	R1121	F6	R1204	F6	R1306	* E6	R1421	* A7	R1810	* B4	R2034	A3	R2230	A8	R2316	C5
L2602	D5	Q1063	F7	Q2615	* D5	R156	* F6	R503	F1	R627	F1	R720	F3	R936	E5	R1019	F5	R1122	F6	R1205	E7	R1307	* E6	R1422	F3	R1811	* B4	R2035	A5	R2231	A8	R2317	C5
L2603	E5	Q1064	* E6			R157	* F6	R504	F1	R628	F1	R721	F3	R937	E5	R1020	G5	R1123	F6	R1206	F7	R1308	* E6	R1423	F3	R1812	* C6	R2036	A3	R2232	A8	R2318	C5
L2604	E5	Q1065	* E6	Q001	G3	R158	D3	R505	F1	R629	* G2	R722	F4	R938	* G7	R1021	G5	R1124	* E6	R1207	F6	R1309	* E6	R1424	* A8	R1813	* C6	R2037	A3	R2233	A8	R2319	C6
L2605	E3	Q1066	* F6	Q002	G5	R159	F6	R506	F1	R630	* G2	R723	F3	R939	* G7	R1022	G5	R1125	* F6	R1208	E7	R1310	* E6	R1425	* A8	R1814	* C6	R2038	A5	R2234	* C5	R2320	C6
L2606	* E3	Q1067	* F6	Q003	B7	R160	* F7	R507	F1	R631	G2	R724	F3	R940	* G7	R1023	F5	R1126	* E6	R1209	F7	R1311	* E6	R1426	* A7	R1815	* C6	R2039	A5	R2235	A8	R2321	C5
L2607	* D3	Q1068	* E7	Q006	G4	R161	* F7	R508	F1	R632	* G2	R725	F3	R941	* G7	R1024	G5	R1127	* F6	R1210	E6	R1312	* E6	R1427	* A7	R1816	* C6	R2040	A3	R2236	A8	R2322	C5
L2608	* E6	Q1069	* E7	Q007	G6	R162	F6	R514	F1	R633	* G2	R726	F3	R942	* G7	R1025	G4	R1128	E6	R1211	E7	R1313	* E6	R1428	F3	R1817	* C6	R2041	A3	R2237	* B5	R2323	C5
L2609	* D6	Q1070	* F7	Q011	G6	R200	E2	R515	F2	R634	F1	R727	F3	R943	* G7	R1026	G4	R1129	F6	R1212	F6	R1314	* E6	R1429	* A7	R1818	* C6	R2042	A5	R2238	A8	R2324	C5
L2610	E4	Q1071	* F7	Q013	C7	R201	E3	R516	F2	R635	* F1	R728	F3	R944	* G7	R1027	F4	R1130	E6	R1213	F7	R1315	* E6	R1430	F3	R1819	* C6	R2043	A5	R2239	* B5	R2325	C6
L2611	* D5	Q1072	E7	Q015	* G5	R202	* D3	R517	F1	R636	G1	R729	F3	R945	* G7	R1029	* F7	R1131	* E6	R1214	F7	R1316	* E6	R1431	* F3	R1820	* C6	R2045	A4	R2240	A7	R2326	C5
L2612	* E5	Q1073	F7	Q016	* G6	R203	* D3	R518	F1	R637	* F1	R730	F3	R946	E5	R1030	* F7	R1132	F6	R1215	F7	R1317	E6	R1432	* A8	R1821	* B5	R2047	A4	R2241	A7	R2327	C5
		Q1074	* F7	Q017	* G6	R204	* D3	R519	F1	R638	F1	R731	F4	R947	E5	R1050	* F5	R1133	* E6	R1216	E6	R1318	E6	R1433	* F3	R1822	* B5	R2048	A3	R2242	* C6	R2328	C6
L001	G4	Q1075	E7	Q018	* G5	R205	D2	R520	F2	R639	G1	R733	G4	R948	* G7	R1051	* F5	R1134	* F6	R1217	F6	R1319	E6	R1434	* F3	R1823	A5	R2049	A4	R2243	* C6	R2329	C5
L002	G6	Q1076	F7	Q019	* G5	R206	D2	R521	F2	R640	G2	R734	G4	R949	* G7	R1052	F5	R1135	* F6	R1218	F7	R1320	E6	R1435	* A7	R1824	A5	R2052	A5	R2244	B5	R2330	C5
L003	B7	Q1077	* E7	Q020	* G5	R207	A1	R522	F1	R641	G2	R800	* F3	R950	* G7	R1053	F5	R1136	* F6	R1219	E7	R1324	* F3	R1436	* A7	R1825	A5	R2053	A5	R2245	B5	R2331	C6
L004	B7	Q1078	* E7	Q021	* G5	R210	A1	R523	F2	R642	G2	R801	* F3	R951	* G7	R1054	F5	R1137	* E6	R1220	F7	R1325	* F3	R1437	* F3	R1826	A5	R2054	* A5	R2246	B5	R2332	C6
L005	G5	Q1079	* F7	Q022	* G5	R211	* A1	R524	F1	R643	F1	R802	* F3	R952	* G7	R1055	* F5	R1138	* E6	R1221	F7	R1326	* F3	R1438	* A8	R1827	* B4	R2055	G1	R2247	B6	R2333	C5
L006	G3	Q1080	* F7	Q024	* G5	R212	* A1	R525	F2	R644	F1	R804	F3	R953	E5	R1056	* F5	R1139	* F6	R1222	E7	R1327	E7	R1439	* A8	R1829	* B4	R2056	* B5	R2248	B5	R2334	C5
L007	G4	Q1081	* E7	Q025	* F5	R213	A1	R526	F1	R645	F1	R805	F3	R954	E5	R1057	F5	R1140	* E6	R1223	E7	R1328	E7	R1440	* A8	R1831	B4	R2057	* A5	R2249	B5	R2335	C5
L008	G6	Q1082	* F7	Q026	* G5	R214	A2	R527	F1	R646	G1	R806	G3	R955	G8	R1058	F5	R1141	* F6	R1224	F7	R1329	E7	R1441	* A8	R1832	B4	R2058	* B5	R2250	B5	R2336	C5
L009	G5	Q1083	* F7	Q027	E3	R215	A2	R528	F1	R647	G1	R807	G3	R956	* E5	R1059	* F5	R1142	* E6	R1225	F7	R1330	E7	R1442	* A8	R1833	* A4	R2059	* A5	R2251	* C5	R2337	D5
L010	G6	Q1084	* E7	Q028	G6	R216	A2	R529	F2	R648	G1	R808	F3	R957	* E5	R1060	F5	R1143	* F6	R1226	E7	R1331	* F3	R1443	* A8	R1834	* A4	R2060	* A5	R2252	B5	R2338	D5
L011	G3	Q1085	* F7	Q029	G6	R217	C2	R530	F1	R649	G1	R809	F3	R958	* E5	R1061	F5	R1144	* E6	R1227	F7	R1332	E7	R1444	* A8	R1835	* B4	R2061	A3	R2253	B5	R2339	D5
L012	G5	Q1086	* F7	Q030	* F5	R218	D2	R531	F1	R650	F1	R810	F3	R959	* E5	R1062	F5	R1145	* F6	R1228	* E6	R1333	E7	R1445	* A8	R1836	* A3	R2062	A3	R2254	* C5	R2340	D6
L013	G3	Q1087	* E7	Q031	F6	R219	C2	R532	F1	R651	G1	R811	F3	R960	G7	R1063	F5	R1146	* E6	R1229	* E6	R1334	E7	R1446	* A8	R1837	* B4	R2063	* A5	R2255	B6	R2341	D6
L014	G6	Q1088	E7	Q032	F7	R300	A6	R533	F1	R652	* F1	R812	F3	R961	G8	R1064	F5	R1147	* F6	R1230	* F6	R1335	E7	R1447	A7	R1838	* B4	R2064	* B3	R2256	B5	R2342	D5
L016	G6	Q1089	* F7	Q033	* F6	R301	A6	R534	F2	R653	* F1	R813	F3	R962	G7	R1065	F5	R1148	* E6	R1231	* F6	R1336	* F3	R1448	B7	R1839	B4	R2065	* B4	R2257	B5	R2343	D5
L017	* E4	Q1090	F7			R302	A6	R535	G2	R654	* F1	R814	* E3	R963	G7	R1066	F5	R1149	* F6	R1232	* E7	R1337	* E7	R1449	A7	R1840	A5	R2066	* B4	R2258	B5	R2344	D5
L018	B7	Q1091	E7	R100	B2	R303	A6	R536	G1	R655	* F1	R815	* F3	R964	G8	R1067	F5	R1150	* E6	R1233	* E7	R1338	* E7	R1450	A7	R1841	A5	R2067	* B4	R2259	* C5	R2345	D6
L019	B7	Q1092	F7	R101	* B2	R304	A6	R537	F1	R656	* G3	R816	* F3	R965	E5	R1068	F5	R1151	* F6	R1234	* F7	R1339	* E7	R1451	A8	R1900	B3	R2068	* B4	R2260	* C5	R2346	D6
L020	* B7	Q1093	* E7	R102	* B2	R305	A6	R538	G2	R662	G2	R818	* F3	R966	E5	R1069	F5	R1152	* E6	R1235	* F7	R1340	* E7	R1500	* B3	R1901	* B3	R2069	A3	R2261	* C5	R2347	D5
L021	G6	Q1094	* E7	R103	* B2	R306	A6	R539	F2	R663	F1	R819	F3	R967	* E5	R1070	F5	R1153	* E6	R1236	* E6	R1341	E7	R1501	C4	R1902	* B3	R2070	* B4	R2262	* C5	R2348	D6
L022	E3	Q1095	* F7	R104	* B2	R307	A6	R540	G2	R664	* G2	R820	* E3	R968	* E5	R1071	F5	R1154	* F6	R1237	* E6	R1342	E7	R1502	* B3	R1903	* B3	R2071	* B4	R2263	* C5	R2349	D5
L023	E3	Q1096	* E7	R105	* B2	R308	A6	R541	F2	R669																							

R2386	D4	R2515	D7	R2632	E5	R033	G3	RB121	*E3	RB702	*G4	RB1608	D3	RB2217	C6	TP800	F2	ENC-112	CL106	*B2	RB126	B1	PS-739D	C2002	*D2	CL2001	C1	D223	*E4	IC2011	*C1		
R2387	D5	R2516	D7	R2633	E5	R034	G3	RB122	*C7	RB703	*G4	RB1609	D3	RB2218	C6	TP801	F2	1-879-595-11	CL107	*A2			1-879-407-31	C2003	D2	CL2002	C1	D1001	F2	IC2012	*C1		
R2388	D6	R2517	D7	R2634	D3	R035	G6	RB200	*E2	RB704	*G3	RB1610	C3	RB2300	C5	TP802	F2	*: B SIDE	CL108	*A2			*: B SIDE	C2004	E2	CL2003	C1	D1003	F2	IC2013	E1		
R2389	D6	R2518	D7	R2635	E5	R038	G5	RB201	*E2	RB705	G3	RB1611	C3	RB2301	C6	TP803	F2		CL109	*A2				C2005	E2	CL2004	D1	D1004	F2	IC2015	*C5		
R2390	D5	R2519	D7	R2636	E3	R039	G5	RB202	*D3	RB706	G3	RB1612	D3	RB2302	C6	TP1050	F5	C100	*A1	*A2			C1	H2	C2006	B2	CL2005	D1	D1005	F1			
R2391	D5	R2520	D7	R2637	E3	R040	G3	RB203	*E2	RB707	G3	RB1613	D3	RB2303	C5	TP1051	F5	C101	*A1	CL111	*B2			C2	H3	C2007	A2	CL2006	E1	D1006	*F1	L1	H2
R2392	D5	R2521	*D7	R2639	D3	R041	G3	RB204	A1	RB708	F3	RB1614	C3	RB2304	C5	TP1400	*B1	C102	*A1	CL112	B1			C3	H3	C2008	B2	CL2007	C2	D1007	*F1	L2	H4
R2393	D5	R2522	*D7	R2640	D3	R042	G3	RB205	*D3	RB709	*F3	RB1615	C3	RB2305	C5	TP1401	*B8	C103	*A1	CL113	A1			C4	H4	C2009	*B1	CL2008	C1	D1008	*F1	L3	*E5
R2394	D5	R2523	*D7	R2641	E3	R043	G6	RB206	A1	RB711	*G3	RB1616	*D3	RB2306	C5	TP1402	*F8	C104	*A1	CL114	*B2			C5	G5	C2010	E2	CL2009	E2	D1009	*F1	L4	*E5
R2395	D5	R2524	*D7	R2644	E3	R044	G6	RB207	A1	RB713	F3	RB1617	*D3	RB2307	C5	TP1403	*F1	C105	*B2	CL115	*B2			C6	G2	C2011	*D2	CL2010	E1	D1010	F1	L5	E4
R2396	D5	R2525	*D7	R2647	E3	R045	G6	RB300	A6	RB714	F3	RB1618	*C3	RB2308	C5	TP1404	*G5	C106	*A1	CL116	*B2			C7	*E4	C2012	E2	CL2011	E1	D1011	*A1	L9	E3
R2397	D5	R2526	*D7	R2648	E3	R049	C7	RB301	*B6	RB715	F3	RB1619	*C3	RB2450	*C7	TP1405	*G3	C107	*B1	CL117	*B2			C8	H4	C2013	*D1	CL2012	E1	D1013	G1	L202	E4
R2398	*C5	R2527	D7	R2651	*E3	R050	*E4	RB302	B6	RB716	*F3	RB1620	*D3	RB2451	*C7	TP1406	*D8	C108	*B2	CL118	*A2			C9	*E4	C2014	E1	CL2013	D1	D1014	G1	L203	E5
R2399	*C5	R2528	D7	R2652	*E3	R051	*G5	RB303	*B6	RB718	F3	RB1621	*D3	RB2452	*C7	TP1407	*D1	C109	*A1	CL119	*A2			C10	E5	C2015	*B2	CL2014	D1	D1015	G2	L204	E4
R2400	*C5	R2529	*D7	R2653	E5	R052	*G5	RB400	A2	RB719	F3	RB1622	*C3	RB2453	*C7	TP1408	*G8	C110	*B1					C11	*G5	C2016	*D1	CL2015	E1	D2001	B1	L205	D5
R2401	*C5	R2530	*D7	R2654	E5	R053	C7	RB401	*E1	RB720	F4	RB1623	*C3	RB2454	*C7	TP1409	*D4	C111	*B1	CN100	B2			C12	G5	C2017	*D1	CL2016	E1	D2002	D2	L1004	F1
R2402	*C5	R2531	*D7	R2655	E3	R054	C7	RB402	*E1	RB721	F4	RB1624	*C2	RB2455	*C7	TP1410	*G1	C112	*B1					C13	*G5	C2018	*B2	CL2017	E1	D2003	D2	L1005	*A1
R2403	*C5	R2532	*D7	R2656	D3	R055	C7	RB403	F7	RB722	*F3	RB1625	*C2	RB2600	D3	TP1700	C4	C113	*B2	D100	*A1			C14	*E5	C2019	*D2	CL2018	C5	D2004	D2	L2001	C2
R2404	*C6	R2533	D7	R2658	*D6	R056	*G6	RB404	F2	RB723	F3	RB1626	*C2	RB2601	D3	TP1701	C4	C114	*A2	D101	*A1			C15	G2	C2020	C1	CL2019	C5	D2005	*E2	L2003	C5
R2405	*C6	R2534	D7	R2659	D5	R057	*G6	RB405	*E1	RB724	F4	RB1627	*C2	RB2602	E3	TP2200	C4	C115	*A2	D102	*A1			C16	F4	C2021	*D1	CL2020	C5	D2006	*D1	L2004	B5
R2406	*C6	R2535	*D7	R2660	D5	R058	*E4	RB406	*E1	RB725	F3	RB1628	C2	RB2702	C1	TP2201	A7	C116	*A2	D103	*A1			C17	*G5	C2022	*B1	CL2021	D1	D2007	*B1	L2005	A4
R2450	*C7	R2536	*D7	R2661	*D6	R059	*E4	RB407	B2	RB726	F3	RB1629	C2	RB2703	C1	TP2300	D6	C117	*A2	D104	*A1			C18	*F5	C2023	*B2	CL2022	D1	D2008	E1	L2006	B4
R2451	*C7	R2537	*D7	R2662	*D6	R060	*E4	RB408	*E1	RB727	F3	RB1630	C2	RB2704	*D6	TP2301	D4	C118	*A2	D105	*A1			C19	*F5	C2024	*D1	CL2023	D1	D2009	D1	L2007	A3
R2452	*C7	R2538	*D7	R2663	*D6	R061	*F6	RB409	*E1	RB728	F3	RB1631	C2	RB2705	*C6	TP2302	D5	C119	*A2	D106	*A1			C20	*E5	C2025	*D1	CL2024	*B2	D2010	E1	L2008	B3
R2453	*C7	R2539	D7	R2664	*D6	R062	*G5	RB410	E2	RB729	G3	RB1632	*C2	RB2706	C6	TP2450	D7	C120	*A2	D107	*A1			C21	*E4	C2026	*D1	CL2025	*A2	D2012	*C2		
R2454	*C7	R2540	D7	R2665	*D6	R063	*F5	RB411	E2	RB730	G3	RB1633	*C2	RB2707	E1	TP2451	D7	C121	*A2	D108	*A1			C22	*E5	C2027	C1			D2013	*C1	PH2	E3
R2455	*C7	R2541	D7	R2666	*F3	R064	*F5	RB412	*E1	RB731	G3	RB1634	*C2	RB2708	E1	TP2452	D7	C122	*B2	D109	*A1			C23	*E5	C2028	*C2	CN1	H1	D2014	D1	PH3	G2
R2456	*C7	R2542	D7	R2667	*F3	R065	*G5	RB413	*E1	RB732	*F3	RB1635	*C2			TP2460	D4	C123	*B2					C24	*E5	C2029	C1	CN1004	A1	D2015	D1	PH201	E3
R2457	*C7	R2543	D7	R2668	*E6	R066	*G5	RB414	*E1	RB800	G3	RB1636	*C2	RV601	F1	TP2601	E4	C124	*A2	FB100	*B2			C25	F4	C2030	D1	CN1008	E1	D2016	D1	PH202	E3
R2458	*C7	R2544	D7	R2669	*E6	R067	*G5	RB415	*D1	RB803	*G2	RB1637	*C2	RV1050	E6	TP2602	D3	C125	*B2	FB101	*B2			C26	G3	C2031	*C1	CN1009	C1	D2017	D1	PH203	E3
R2459	*C7	R2545	D7	R2670	*D6	R068	*B7	RB416	E2	RB804	F3	RB1638	*C2	RV1051	F6			C126	*B2	FB102	A2			C27	G3	C2032	*E1	CN1010	D1	D2018	D1	PH204	E3
R2460	*C7	R2546	D7	R2671	*D6	R069	*G5	RB417	E2	RB805	F3	RB1639	C2			VD2000	A2	C127	*B2					C28	F5	C2033	*E1	CN1011	B1	D2019	C4	PH2001	D1
R2461	*C7	R2547	D7	R2672	E4	R070	*G5	RB418	*E1	RB806	F3	RB1640	C2	RY1050	E7	VD2001	A2	C128	A2	IC100	B2			C29	*G4	C2034	E1	CN2002	A3	D2020	C1	PH2002	E1
R2462	*C7	R2548	D7	R2673	E4	R071	*F5	RB419	*D1	RB807	G3	RB1641	C2	RY1051	F7	VD2002	A5	C129	*B2	IC101	A1			C32	F4	C2036	D1			D2021	C3	PH2003	E1
R2463	*C7	R2549	D7	R2674	E4	R072	*F5	RB420	*D1	RB808	G3	RB1642	C5	RY1400	A7	VD2003	A5	C130	*B1	IC102	B1			C33	F4	C2037	E1	D1	G5	D2022	D1	PH2004	D1
R2464	*C7	R2550	D7	R2675	E4	R073	*G5	RB421	*D1	RB809	F2	RB1643	C2			VD2004	A4	C131	*B2					C34	F5	C2038	C4	D2	G5	D2023	C1	PH2005	*C1
R2465	*C7	R2551	D7	R2676	*E5	R074	*F6	RB422	*F2	RB810	F3	RB1644	C2	S100	D3	VD2005	A3	C132	*B2	R100	B1			C35	G2	C2039	D1	D3	G4	D2024	D1	PH2006	D1
R2466	*C7	R2552	D7	R2677	*E5	R075	*F6	RB424	*D1	RB811	*F3	RB1645	C2	S700	G3			C133	*A1	R101	*B1			C36	*G2	C2040	D1	D4	F4	D2025	D1	PH2007	D1
R2467	*C7	R2553	D7	R2678	*D5	R076	*B7	RB425	*D1	RB812	F3	RB1646	C2			X100	D2	C134	*A1	R102	*A1			C207	E4	C2041	B4	D5	*F5	D2026	C1	PH2008	D1
R2468	*C7	R2554	D7	R2679	*D5	R077	*B7	RB430	E1	RB900	F4	RB1647	*C2	SL001	C8	X300	A5	C135	*A2	R103	*B2			C208	F4	C2042	B4	D6	F4	D2027	C1	PH2009	C1
R2469	*C7	R2555	D7	R2680	*D5	R078	*F5	RB431	E1	RB901	F4	RB1700	*B3	SL002	D5	X600	G2	C136	*B2	R104	B2			C209	E4	C2043	B4	D7	*F5	D2028	C1	PH2011	E1
R2470	*C7	R2556	D7	R2681	*E5	R079	*G5	RB432	E1	RB1050	F4	RB1701	*B3	SL003	E5	X601	F1	C137	*B1	R105	A2			C210	E5	C2044	C5	D8	F4	D2029	*C1	PH2012	C1
R2471	*D6	R2557	D7	R2682	E5	R080	*F6	RB433	E1	RB1300	E6	RB1702	*B3	SL004	F1	X602	G2	C138	*B2	R106	*B2			C211	E3	C2045	A5	D9	*E4	D2030	*C1		
R2472	*D6	R2558	D7	R2700	*A4	R081	*F6	RB434	E1	RB1400	E3	RB1703	*B3	SL005	G1			C139	*A2	R107	A2			C213	E4	C2046	A5	D10	*E4	D2031	*C1	Q1	F4
R2473	*D6	R2559	D7	R2701	A5	R082	*F6	RB435	D1	RB1401	*E3	RB1704	*C4	SL100	G7	X700	F3	C140	*A2	R108	*B7			C214	E4	C2047	B5	D11	*E4	D2032	*C1	Q2	F4
R2474	*D6	R2560	D7	R2702	*A5	R083	*F6	RB436	D1	RB1402	E3	RB1800	*C6	SL300	A6			C141	*A2	R109	*B2			C215	E4	C2048	A4	D12	F4	D2033	*C1	Q3	F4
R2475	*D7	R2561	D7	R2703	A4	R084	E3	RB437	D1	RB1403	*E3	RB1900	A3	SL301	A6			C142	*A2	R110	A2			C216	C4	C2049	B4	D13	F4	D2035	*C5	Q4	*E4
R2478	*D7	R2562	D7	R2704	D1	R085	E4	RB438	C1	RB1404	F3	RB1901	A3	SL600	*F1			C143	*B2	R111	A2			C217	D3	C2051	A3	D14	*G5	D2037	*C5	Q5	*E4
R2479	D7	R2563	D7	R2705	C1	R086	E4	RB439	D1	RB1405	*F3	RB1902	A3	SL601	*F1			C144	*B1	R112	*B2			C218	*E5	C2052	B3	D15	E5	D2038	*C5	Q7	

Q2013	* C1	R60	G4	R1015	F2	R2040	* D1	R2123	C4	T1 T201	F3 C3	SW-1615 1-889-643-11 *: B SIDE	D039	G1	Q006	* B1	R252	* D1	R014	* C1	
Q2014	D1	R61	G4	R1018	F2	R2041	C1	R2124	* B2				D040	E2	Q007	* C1	R253	* D1	R015	* C1	
Q2015	* C1	R62	F4	R1019	E1	R2042	C1	R2125	* B2				FB001	A2	Q008	* C2	R254	D1	R016	* C1	
Q2016	D1	R63	F4	R1020	G1	R2043	* B2	R2126	* B2	TH1	H5	C101	A2	FB002	A2	Q009	* B2	R255	D1	R017	* A1
Q2017	D1	R64	F4	R1021	G2	R2044	* B1	R2127	C1	TH1001	C5	C102	* A2	FB035	A1	Q010	* F2	R256	* D1	R018	* A1
Q2018	D1	R65	F4	R1022	G1	R2045	* B1	R2128	D1	THP1	G5	C103	* A2	FB121	A2	Q035	* D2	R257	* D1	R019	* B1
Q2019	C4	R66	F4	R1023	G1	R2046	C1	R2129	B4			C104	* A2			Q036	* C2	R258	D1	R020	* B1
Q2020	C4	R67	* G2	R1024	G1	R2047	D1	R2130	* B3			C121	* C2			Q037	* G1	R259	D1	R021	* D1
Q2021	C4	R68	* G2	R1025	G1	R2048	* D1	R2131	* B3	TP1	G5	C122	* C2	IC001	C2	Q038	* G2	R260	* D1	R022	* D1
Q2022	D1	R69	F4	R1026	G1	R2049	* D1	R2132	* B2	TP201	F4	C123	* C2	IC4	* C2	Q039	* G1	R261	* D1	R023	* D1
Q2023	* B2	R70	F4	R1027	G1	R2050	* D1	R2133	C1	TP1001	F1	C124	* B2	IC5	* B2	Q040	* E2	R262	D1	R024	* D1
Q2024	C1	R71	F3	R1028	G1	R2051	* D1	R2134	B4	TP1002	* G1	C125	* B2	IC7	* B2			R263	D1	R025	* B2
Q2025	C1	R72	F3	R1029	G1	R2052	* D1	R2135	* C1	TP1003	G1	C126	* B2	IC008	* G1	R101	* A2	R264	* D1	R026	* B2
Q2026	* C1	R73	F4	R1030	F1	R2053	* D1	R2136	* C1	TP1004	* H5	C127	* B2	IC011	F1	R102	A2	R265	* D1	R027	* G1
Q2027	* D1	R74	F5	R1031	F1	R2054	* D1	R2137	* C1	TP1005	* E2	C128	* B2	IC101	A2	R103	A2	R266	D1	R028	* G1
Q2028	E2	R75	G2	R1032	* F1	R2055	* E1	R2138	D1	TP2001	B2	C129	* B2	IC202	* E1	R104	A2	R267	D1	R035	* G1
Q2029	* C5	R76	F4	R1033	* F1	R2056	D1	R2139	* D1	TP2002	D1	C130	* C2	IC203	* E1	R105	A2	R268	* E1	R036	* G1
Q2030	* C4	R77	* F4	R1034	* F1	R2057	D1	R2140	* C3	TP2003	B3	C131	* G2	IC251	* E1	R121	* C2	R269	* D1	R037	* G1
Q2031	* C1	R78	* F4	R1035	* F1	R2058	D1	R2141	C1	TP2004	E1	C132	* E2	IC252	* E1	R122	* C2	R270	* D1	R038	* G1
Q2032	E1	R79	G2	R1036	* F1	R2059	C2	R2142	D1	TP2005	C5	C133	* B2	IC301	* E2	R123	* B2	R271	D1	R039	* D2
Q2033	E1	R80	E5	R1037	* F1	R2060	C1	R2143	* D2	TP2006	* E1	C134	* D2	IC302	* E1	R124	* B2	R272	D1	R040	* D2
Q2034	E1	R81	E5	R1039	C5	R2061	C1	R2144	* C5	TP2007	C5	C135	* E2	TP2008	* C5	R125	* B2	R273	* D1	R041	* D2
Q2035	B3	R82	F5	R1040	F1	R2062	C1	R2145	* D2	TP2008	* C5	C136	* C2	TP2009	* A5	R126	* B2	R274	* D1	R042	* D2
Q2036	B3	R83	* G2	R1041	F1	R2063	C1	R2146	* D2	TP2010	* A1	C137	* C2	JC001	* A2	R127	* G2	R275	D1	R043	* D2
		R84	* G2	R1042	* F1	R2064	C1	R2147	* C1			C138	* B2	JC002	* A2	R128	* E2	R276	D1	R044	* C2
R1	G4	R85	* G2	R1043	* F1	R2065	C1	R2148	* C1	VDR1	H1	C139	* E2			R129	* B2	R277	* D1	R045	* C2
R2	G4	R86	* G4	R1044	* F1	R2066	C1	R2149	C1			C140	* D2	L101	A2	R130	* D2	R278	* D1	R046	* E1
R3	G5	R87	* G2	R1045	* F1	R2067	C1	R2150	* C5			C141	* C2	Q101	* A2	R131	* E2	R279	D1	R047	* E1
R4	G5	R88	* G2	R1046	C5	R2068	C1	R2151	* C5			C201	F1	Q201	* D2	R132	* C2	R280	D1	R048	* E1
R5	G5	R89	* F4	R1047	* F2	R2069	E1	R2152	* C5			C202	F1	Q202	D2	R133	* C2	R281	* D1	R049	* F1
R6	G5	R90	* G4	R1048	C5	R2070	* C1	R2153	* C5			C203	* E2	Q202	* D2	R134	* G2	R282	* D1	R050	* F1
R7	G5	R91	* G4	R1049	F1	R2071	* C1	R2154	* C5			C204	* E1	Q203	* D2	R135	* G2	R283	D1	R051	* F1
R8	G5	R92	* G4	R1050	C5	R2072	* C1	R2155	* C5			C205	* E1	Q204	D2	R136	* E2	R284	D1	R052	* G1
R9	G5	R93	F5	R1051	C5	R2073	* C1	R2156	* C5			C206	* E2	Q205	* D2	R137	* E2	R301	* E2	R053	* G1
R10	H2	R94	* E4	R1054	* A1	R2074	* C1	R2157	* C5			C207	* E1	Q206	D2	R138	* B2	R302	* E2	R054	* G1
R11	G4	R95	* G4	R1056	* F1	R2075	C1	R2158	* C5			C208	* E1	Q207	* D2	R139	* B2	R303	* E1	R055	* G2
R12	G4	R96	* G5	R1057	* F1	R2076	* D1	R2159	* C5			C209	* E1	Q208	D2	R140	* D2	R304	* E1	R056	* G2
R13	G4	R97	* G5	R1058	* F1	R2077	E1	R2160	* C5			C251	* E1	Q221	* D2	R141	* D2	R305	* E1	R057	* G1
R14	G4	R98	* F5	R1059	* F1	R2078	E1	R2161	* B2			C252	* E1	Q222	D2	R142	* E2	R306	E1	R058	* G1
R15	G4	R202	E4	R1060	* A1	R2079	E1	R2162	* C3			C253	* E1	Q223	* D2	R143	* E2	R307	E1	R059	* E2
R16	G4	R204	E4	R1061	* A1	R2080	* C2	R2163	* D1			C254	* E1	Q224	D2	R144	* C2	R308	* E1	R060	* E2
R17	G4	R205	E4	R1070	G1	R2081	* C1	R2164	* D1			C255	* E1	Q225	* D2	R145	* C2	R309	* E1		
R18	G4	R206	F4	R1071	G1	R2082	* C1	R2165	E1			C256	* E1	Q226	D2	R146	* C2	R310	E1	RB1	* C2
R19	G4	R207	F4	R1072	G1	R2083	* C1	R2166	* E1			C301	* E2	Q227	* D2	R147	* C2	R311	E1	RB2	C2
R20	G4	R208	F4	R1073	G1	R2084	E1	R2168	E1			C302	* E2	Q228	D2	R201	F1	R312	* E1	RB3	C2
R21	* F4	R213	E4	R1074	* F1	R2085	* E1	R2169	* E1			C303	* E1	Q251	* D1	R202	F1	R313	* E1	RB4	* C2
R22	* F4	R215	F4	R2001	E2	R2086	* E1	R2170	E1			C304	* E1	Q252	D1	R203	F1	R314	E1	RB5	* C2
R23	* E5	R218	E4	R2002	E2	R2087	E1	R2171	E1			C305	* E1	Q253	* D1	R204	F1	R315	E1	RB035	* C2
R24	* E4	R219	E4	R2003	E2	R2088	E1	R2172	* C5			C306	* E2	Q254	D1	R205	* E2	R316	* E1	RB036	* C2
R25	* E4	R221	E4	R2006	* D2	R2089	* D1	R2173	* C5			C307	* E2	Q255	* D1	R206	* D2	R317	* E1		
R26	* E4	R222	E4	R2007	E2	R2090	C1	R2174	* C5			C308	* E2	Q256	D1	R207	* D2	R318	E1	RV121	G2
R27	G4	R227	* E4	R2008	E2	R2091	* E1	R2175	* C5					Q257	* D1	R208	D2	R319	E1	RV122	F2
R28	G4	R228	E4	R2009	D2	R2092	* E1	R2176	* C5					Q258	D1	R209	D2	R320	* E2	RV123	A2
R29	* F5	R229	E4	R2010	E2	R2093	* E1	R2177	* C5					Q271	* D1	R210	* D2	R321	* E2	RV124	D2
R30	* F5	R234	C4	R2011	* E1	R2094	* E1	R2178	* C5					Q272	D1	R211	* D2	R322	* E2	RV125	E2
R31	* E4	R235	C4	R2012	* E2	R2095	E1	R2179	C2					Q273	* D1	R212	D2	R323	E2	RV126	C2
R32	* E4	R236	C3	R2013	* E2	R2096	C1	R2180	C2					Q274	D1	R213	D2	R324	E2	RV127	C2
R33	G4	R237	E5	R2014	* E2	R2097	C1	R2181	C1					Q275	* D1	R214	* D2	R325	* E2		
R34	* E4	R238	E5	R2015	* E2	R2098	* C1	R2182	C1					Q276	D1	R215	* D2	R326	* E2	S001	A1
R35	* E4	R239	E5	R2016	D1	R2099	* C1	R2183	C1					Q277	* D1	R216	D2	R327	E2	S002	A2
R36	G4	R240	D5	R2017	* D1	R2100	* C1	R2184	C1					Q278	D1	R217	D2	R328	E2	S003	B1
R37	G4	R241	D5	R2018	E2	R2101	D1	R2185	C1					Q301	* E1	R218	* D2	R329	* E2	S004	C1
R38	G4	R242	E5	R2019	* D2	R2102	D1	R2186	* D1					Q302	E1	R219	* D2	R330	* E2	S005	A1
R39	G4	R246	E4	R2020	C1	R2103	D1	R2187	* D1					Q303	* E1	R220	D2	R331	E2	S006	B1
R40	* G5	R249	D5	R2021	* D1	R2104	* C1	R2188	* D1					Q304	E1	R221	D2	R332	E2	S007	C1
R41	G4	R250	E5	R2022	D1	R2105	* C1	R2189	C3					Q305	* E1	R222	* E2	R333	* E2	S008	C1
R42	G5	R258	E4	R2023	D1	R2106	* C1	R2190	C3					Q306	E1	R223	* D2	R334	* E2	S009	B2
R44	* G5	R259	E4	R2024	B1	R2107	D1							Q307	* E1	R224	* D2	R335	E2	S010	G1
R45	E3	R260	E4	R2025	B1	R2108	D1	RY2001	B4					Q308	E1	R225	D2	R336	E2	S035	D2
R46	E3	R262	E4	R2026	B1	R2109	D1							Q321	* E2	R226	D2			S036	E1
R47	* G5	R272	E4	R2027	B1	R2110	D1	SL1001	F1					Q322	E2	R227	* D2	R001	* C2	S037	F1
R48	* G5	R274	* E4	R2028	* D1	R2111	C3	SL1002	G1					Q323	* E2	R228	* D2	R002	* C2		
R49	* G5	R1001	F2	R2029	* D1	R2112	C4	SL1003	G1					Q324	E2	R229	D2	R003	C2	SL035	A1
R50	* F5	R1002	F1	R2030	* D1	R2113	C1	SL1004	F1					Q325	* E2	R230	D2	R004	C2	SL121	A2
R51	* G5	R1003	G2	R2031	* D1	R2114	C3	SL1005	E2					Q326	E2	R231	* D2	R005	* A1		
R52	* F5	R1004	G2	R2032	* E1	R2115	C3	SL1006	G5					Q327	* E2	R232	* D2	R006	* A1	TP001	B1
R53	* F5	R1005	E2	R2033	* B2	R2116	C4	SL1007	F5					Q328	E2	R233	D2	R007	* A1		

HSCU300RF (SY)
HSCU300R (UC)
HSCU300R (CED)
HSCU300R (J) J, E
9-878-495-01

Sony Corporation

Printed in Japan
2013. 10 08
© 2013