SONY

HD DIGITAL VIDEOCASSETTE RECORDER

SRW-5800

DIGITAL BETACAM/HDCAM PROCESSOR BOARD
HKSR-5802

RGB SQ PROCESSOR BOARD
HKSR-5803SQ

ADVANCED HQ PROCESSOR BOARD
HKSR-5803HQ

NETWORK INTERFACE BOARD
HKSR-5804

HDCAM SR™

Tele-File CINE ALTA MEMORY STICK

MAINTENANCE MANUAL
Volume 2 1st Edition (Revised 4)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

設置や保守，点検，修理などを行う前に，別冊のメンテナンスマニュアルVolume 1，インストレーションマニュアル，オペレーションマニュアルのそれぞれの「安全のために」を必ずお読みください。

⚠WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

SRW-5800 (SY)	Serial No. 10001 and Higher
HKSR-5802 (SY)	Serial No. 10001 and Higher
HKSR-5803SQ (SY)	Serial No. 10001 and Higher
HKSR-5803HQ (SY)	Serial No. 10001 and Higher
HKSR-5804 (SY)	Serial No. 10001 and Higher

Table of Contents

このマニュアルについて

本書の目的 ..... 3 (J)
関連マニュアル ..... 3 (J)
商標について ..... 3 (J)

Manual Structure

Purpose of this manual ..... 3 (E)
Related manuals ..... 3 (E)
Trademark ..... 3 (E)

1. Spare Parts

1-1. 補修部品注意事項 1-1
1-1. Notes on Repair Parts 1-1
1-2. Exploded Views 1-3
1-3. Electrical Parts List 1-32
1-4. Supplied Accessories 1-409
1-5. Optional Fixtures 1-410

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall 3-2
FL-350 3-5
AE-31H SUFFIX : -22 3-6
SUFFIX : -25 3-7
TC-104A/112A 3-6, 7
APR-81 3-8
APR-91 3-13
CP-393 3-18
KY-526G 3-18
KY-527 3-18
CP-397 3-21
CP-398 3-21
CP-399 3-21
CP-405 3-22
KY-526G 3-22
KY-527 3-22
CUE-13 3-25
DR-508 3-26
CL-29 3-26
HN-268 ..... 3-26, 27
LP-81 3-26
PC-70 3-26
PTC-99 3-26
CCM-15 3-27
PTC-102 3-27
TR-119 3-27
TR-120 3-27
DT-47 3-28
DT-48 3-29
DVP-43 (HKSR-5802) 3-30
EQ-102 3-35
EQ-109 3-42
FP-155 3-49
FP-163 3-50
DIO-86 ..... 3-49, 50
HP-135 ..... 3-49, 50
LED-455 ..... 3-49, 50
SE-606A 3-49, 50
SWC-46 ..... 3-49, 50
HIF-46 SUFFIX : -11 3-51
SUFFIX : -12 ..... 3-51 (a)
HIF-56 3-57
HPR-22 3-63
HPR-35 3-66
MY-115 (HKSR-5804) 3-69
IF-1071 (HKSR-5804) 3-71
SS-102 3-74
MB-1101 3-77

4. Board Layouts

AE-31H SUFFIX: -22 4-2
SUFFIX: -25 4-3
APR-81 4-5
APR-91 4-11
CL-29 4-16
CP-393 4-17
CP-397 4-20
CP-398 4-21
CP-399 4-22
CP-405 4-23
CUE-13 4-27
DIO-86 4-29
DR-508 4-30
DT-47 4-32
DT-48 4-33
EQ-102 SUFFIX: -11 4-34
SUFFIX: -12 ..... 4-34 (a)
EQ-109 4-38
FL-350 4-43
FP-155 4-44
FP-163 4-45
HIF-46 SUFFIX: -11 4-46
SUFFIX: -12 ..... 4-46 (a)
HIF-56 SUFFIX: -11 4-50
SUFFIX: -12 ..... 4-50 (a)
HP-135 4-54
HPR-22 SUFFIX: -11 4-55
SUFFIX: -12 ..... 4-55 (a)
HPR-35 4-58
KY-526G 4-62
KY-527 4-64
LED-455 4-66
LP-81 4-67
MB-1101 4-68
PC-70 4-71
SS-102 SUFFIX: -11 4-72
SUFFIX: -12 ..... 4-72 (a)
SUFFIX: -13 ..... 4-72 (b)
SWC-46 4-76
TC-104A 4-76
TC-112A 4-77
DVP-43 (HKSR-5802) SUFFIX: -11 4-78
SUFFIX: -12 ..... 4-78 (a)
IF-1071 (HKSR-5804) 4-83
MY-115 (HKSR-5804) 4-84

このマニュアルについて

本書の目的

本書はHDデジタルビデオカセットレコーダSRW-5800のメンテナンスマニュアルVolume 2です。

本機のメンテナンスマニュアル（Volume 1, 2, 3）は，システム／サービスエンジニアの方々にご使用いただくことを想定し，保守に関する情報と部品レベルでのサービスを前提とした情報（部品交換，調整要項，回路図，マウント図，詳細パーツリスト等）を記載しています。

本書(Volume 2)では，詳細パーツリスト，ブロック図，マウント図を記載しています。

関連マニュアル

本機には，この「メンテナンスマニュアル」のほかに，下記のマニュアルが用意されています。

- **オペレーションマニュアルCD-ROM（本機に付属）**
  本機を実際に運用および操作するのに必要なマニュアルです。設置時にも必要です。

- **インストレーションマニュアル（本機に付属）**
  本機の納入設置時に必要な情報を記載したマニュアルです。

- **リモート（9ピン）コネクタープロトコルマニュアル（別途用意）**
  本機をRS-422A（9ピンシリアルリモート）にて制御するためのプロトコルについて説明したマニュアルです。入手を希望される方は，ソニーの営業窓口にお問い合わせください。

- **パラレルI/O（50ピン）コネクターインターフェースマニュアル（別途用意）**
  本機をパラレル50ピンにて制御するためのプロトコルについて説明したマニュアルです。入手を希望される方は，ソニーの営業窓口にお問い合わせください。

- **“Semiconductor Pin Assignments”CD-ROM版（別途用意）**
  この“Semiconductor Pin Assignments”CD-ROM版は，放送用および業務用の機器に使用されている半導体を検索することができます。
  本書には，その機種に使用されている半導体一覧とそのID番号を記載していますので，このCD-ROM版と合わせて使用してください。
  部品番号：9-968-546-06

商標について

このマニュアルに記載されている商標および登録商標は下記のとおりです。

- Ethernetは米国ゼロックス社の登録商標です。

Manual Structure

Purpose of this manual

This manual is the maintenance manual volume 2 of the HD Digital Videocassette Recorder SRW-5800.

This maintenance manual (Volume 1, 2, and 3) is intended for use by trained system and service engineers, and provides the information of maintenance and detailed service (parts replacement, guideline for adjustment, schematic diagrams, board layouts, detailed parts list).

This manual (volume 2) describes detailed parts list, block diagrams, and board layouts.

Related manuals

Besides this “Maintenance manual”, the following manuals are available.

- **Operation Manual CD-ROM (Supplied with this unit.)**
  This manual is necessary for application and operation (and installation) of this unit.

- **Installation Manual (Supplied with this unit.)**
  This manual describes the information on installing this unit.

- **Protocol Manual of Remote (9-pin) Connector (Available on request)**
  This manual explains the protocol for controlling the VTR via the RS-422A (9-pin serial remote). If this manual is required, please contact your local Sony Sales Office/Service Center.

- **Interface Manual of Parallel I/O (50-pin) Connector (Available on request)**
  This manual explains the protocol for controlling the VTR via the parallel (50-pin). If this manual is required, please contact your local Sony Sales Office/ Service Center.

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcast and Professional equipment.
  This manual contains a complete list of semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-06

Trademark

Registered trademark used in this manual is as follows.

• Ethernet is a registered trademark of Xerox Corporation.

Section 1
Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.
In need of repair, get components shown in the list and repair using them.

1-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に“o”で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。
これらは，リストに展開されているコンポーネント部品で補修してください。

1-2. Exploded Views

Index

Item	No.	Title	Page
Reel table assembly Motor holder assembly Worm assembly	1-	Reel Chassis Block	1-4
Drum assembly TG-2, TG-3, TG-4 Video head cleaner assembly	101-	Drum and Video Head Cleaner Block	1-6
AT head assembly S plate assembly Pinch press assembly Capstan motor CTL/FE head assembly S tension regulator T ten assembly T drawer assembly	201-	CTL/FE Head and T Drawer Block	1-8
MC sensor assembly Ring assembly Gear box assembly	301-	Threading Ring and Gear Box Block	1-10
DT-47/48 board AE-31H board TC-104A/112A board	401-	Printed Circuit Board Block	1-12
DR-508 board FL-276 board	501-	Printed Circuit Board Block 2	1-14
Upper lid assembly Front panel assembly Side panel assembly Bottom plate	601-	Ornamental Panel Block	1-16
Cassette compartment assembly Hinge assembly Cassette compartment plate assembly	701-	Cassette Compartment Block	1-18
SC guide assembly Switching regulator assembly CUE-13 board DIO-86 board FL-350 board FP-155/163 board	801-	SC Guide Block and Power Unit Block	1-20
MB-1101 assembly DC fans	901-	Motherboard and DC Fans	1-22
Plug-in boards (APR-81, APR-91, EQ-102, EQ-109, HIF-46/56, HPR-22, HPR-35, SS-102)	1001-	Plug-in Board Block	1-24
Connector panel assembly	1101-	Connector Panel Block	1-26
Control panel assembly	1201-	Control Panel Block (S/N 10001 to 12000)	1-28
Control panel assembly	1301-	Control Panel Block (S/N 12001 and Higher)	1-30

Reel Chassis Block

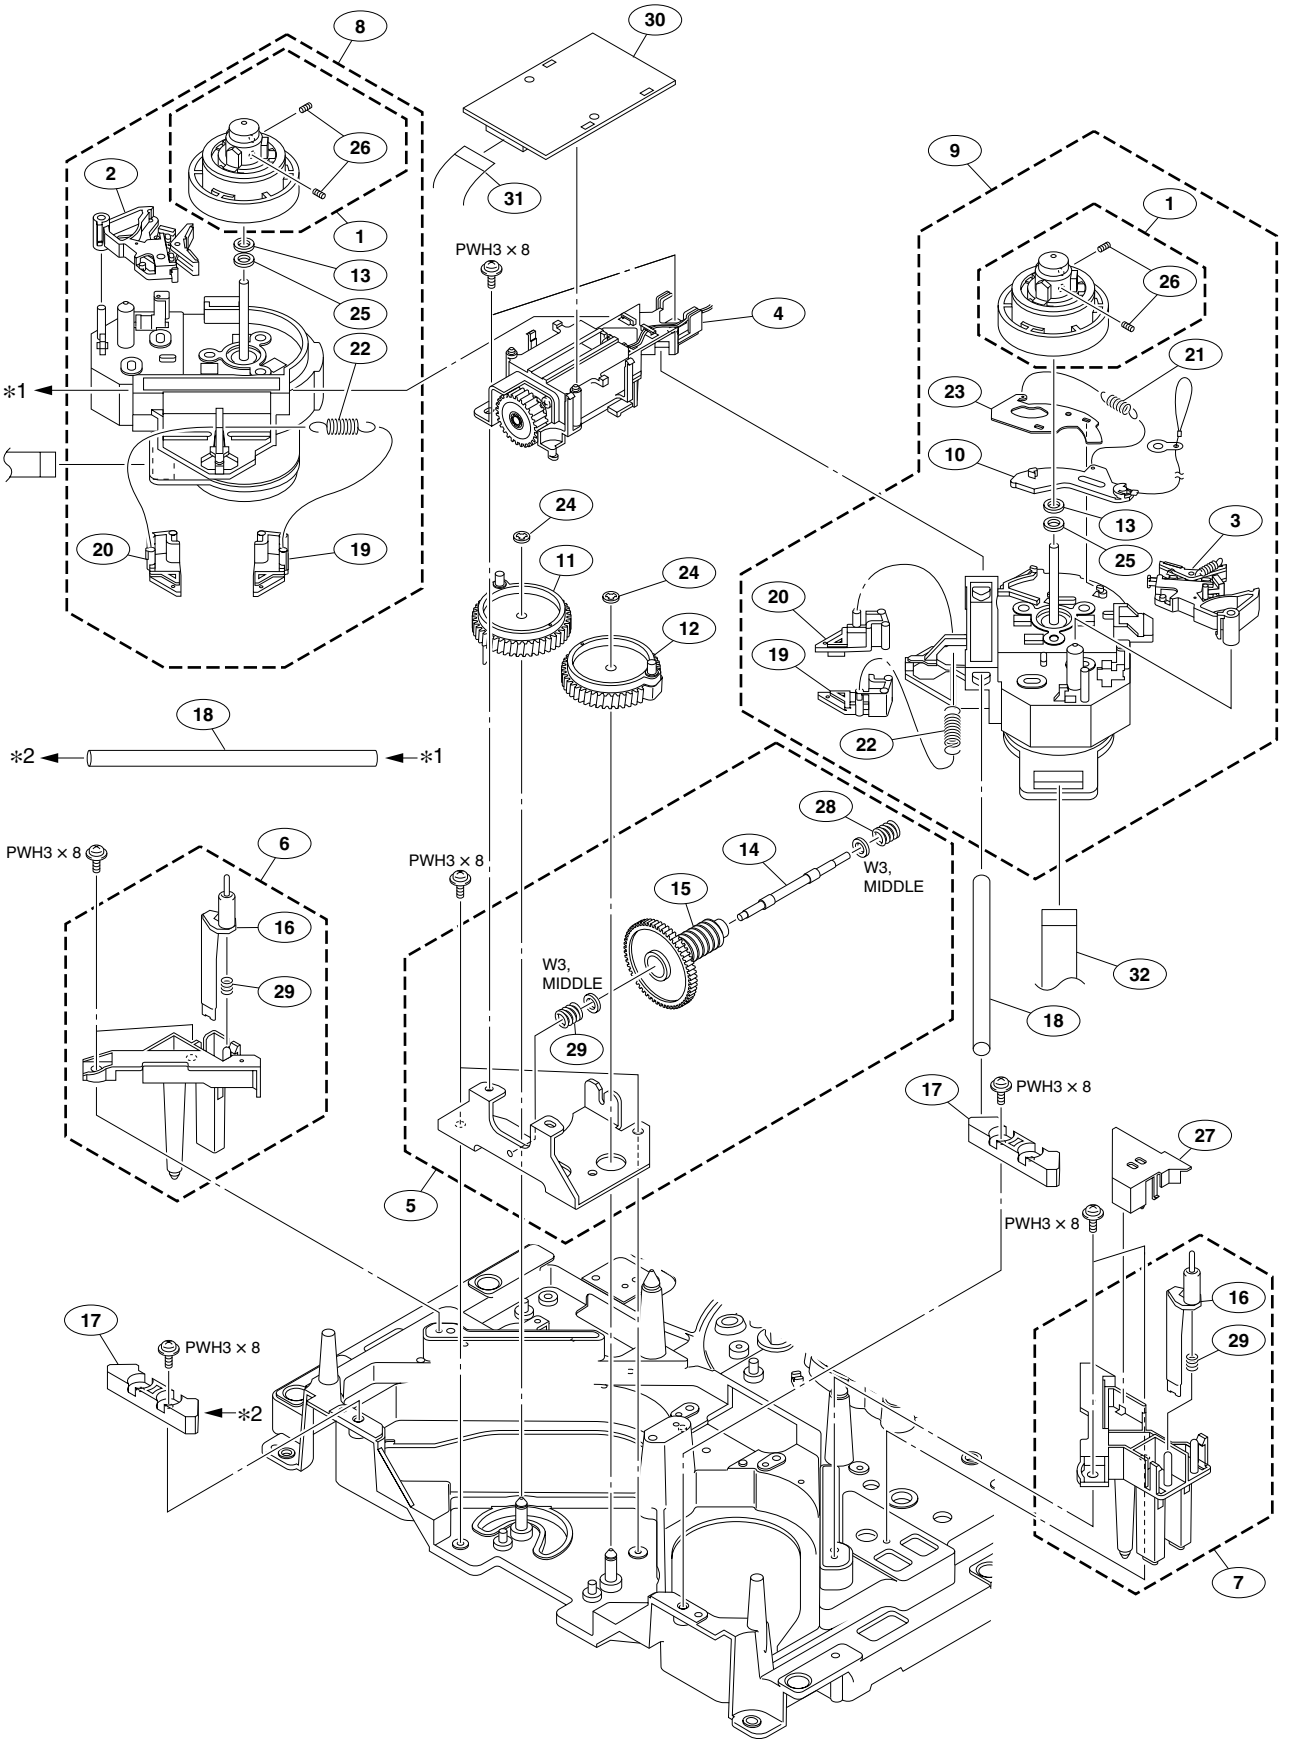

No.	Part No.	SP	Description
1	A-8279-279-B	s	TABLE ASSY,REEL
2	A-8279-990-C	s	BRAKE S(SR), ASSY
3	A-8279-991-C	s	BRAKE T(SR), ASSY
4	A-8279-283-B	s	HOLDER ASSY,MOTOR
5	A-8279-284-C	s	WORM ASSY
6	A-8279-285-A	s	HOLDER ASSY,PLATE(S)
7	A-8279-286-C	s	HOLDER ASSY,PLATE(T)
8	A-1063-067-C	s	SR-RM(S)ASSY(RP)
9	A-1063-068-C	s	SR-RM(T)ASSY(RP)
10	X-3605-770-4	o	WIRE ASSY
11	X-3605-771-2	o	GEAR(S)ASSY,DRIVING
12	X-3605-772-1	o	GEAR(T)ASSY,DRIVING
13	3-188-108-11	s	SPACER, DIA 4
14	3-624-950-02	o	SHAFT,WORM
15	3-624-951-01	o	GEAR,RELAY
16	3-624-952-01	o	LEVER,MR
17	3-624-953-01	s	HOLDER,SHAFT
18	3-624-954-01	s	SHAFT,SLIDE
19	3-624-957-01	o	ARM(A),LIMITER
20	3-624-958-01	o	ARM(B),LIMITER
21	3-624-965-01	o	ME,SPRING
22	3-624-966-01	o	SPRING,LIMITER
23	3-624-969-01	o	RETAINER,ARM
24	3-650-537-01	o	WASHER
25	3-701-441-21	s	WASHER PLASTIC (4.1X0.25)
26	3-701-505-01	s	SET-SCREW,HEX 3X3 ST
27	3-633-270-02	s	COVER, WIRE
28	3-633-290-01	s	SPRING,COMPRESSION
29	4-880-426-01	o	SPRING,COMPRESSION
30	A-8328-379-C	s	MOUNTED CIRCUIT BOARD, SE-606A
31	1-831-012-11	s	CABLE, FLEXIBLE FLAT (4 CORE)
32	1-677-293-12	s	PRINTED WIRING BOARD, FL-276
	7-682-903-21	s	SCREW +PWH 3X8
	7-688-003-11	s	WASHER W3 (M)

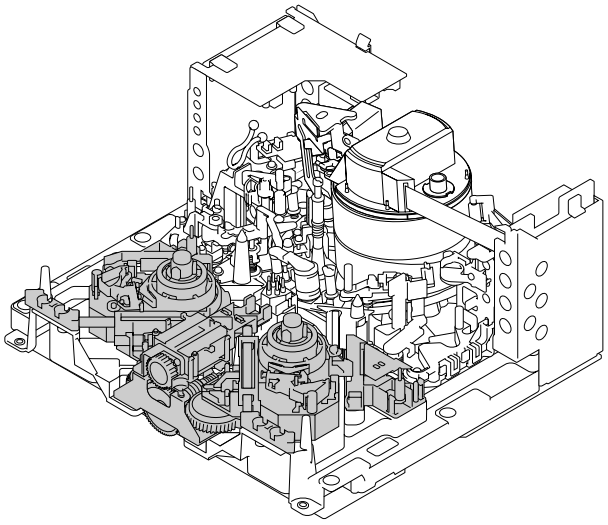

Drum and Video Head Cleaner Block

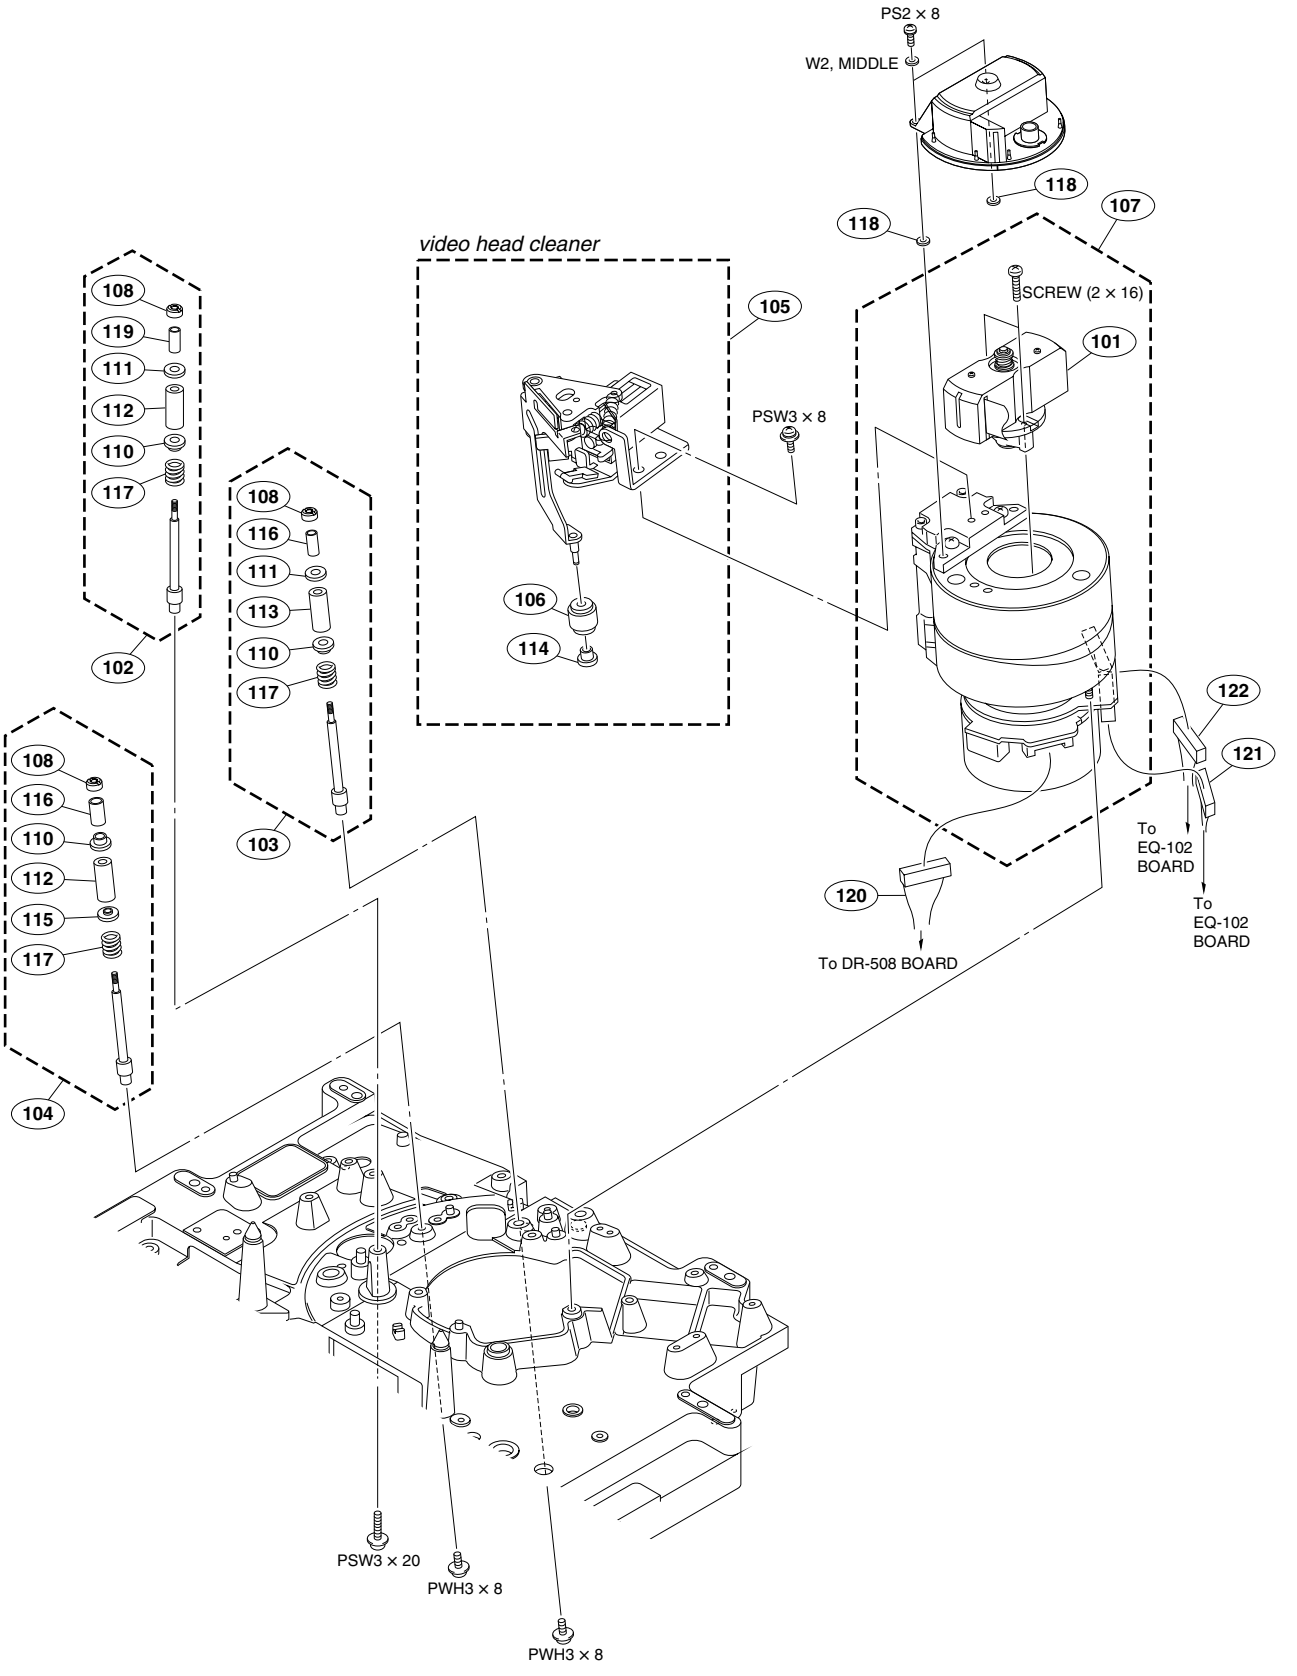

No.	Part No.	SP	Description
101	A-8267-572-G	s	RING (9) ASSY (RP),BRUSH SLIP
102	A-8279-288-B	o	TG-2 ASSY
103	A-8279-289-B	o	TG-3 ASSY
104	A-8279-290-B	o	TG-4 ASSY
105	A-8320-545-B	s	CLEANER (B) ASSY (RP), HEAD
106	A-8320-546-A	s	ROLLER (B) ASSY (RP), CLEANING
107	A-1439-230-A	s	DHH-08A-R
108	2-203-519-21	s	NUT(A),LOCK,PIVOT (COPPER)
110	3-180-669-02	s	FLANGE,FIXED GUIDE USE
111	3-181-489-01	s	FLANGE,DIA.8
112	3-181-490-01	o	SLEEVE,DIA.7
113	3-181-491-01	o	SLEEVE, DIA. 6
114	3-182-765-02	s	SPACER, CR
115	3-190-819-01	s	FLANGE (1), DIA. 8
116	3-659-757-02	s	SPACER (4X8.5)
117	3-738-730-02	s	SPRING,COMPRESSION(COIL) (ST)
118	3-669-465-01	s	WASHER (1.5), STOPPER
119	4-885-848-02	o	SPACER (DIA 3X8)
120	1-960-390-11	s	HARNESS, SUB (DRUM)
121	1-962-389-11	s	HARNESS, SUB (RF PB)
122	1-963-571-11	s	HARNESS, SUB RF REC (HDW)
	7-628-253-35	s	SCREW +PS 2X8
	7-682-903-21	s	SCREW +PWH 3X8
	7-682-948-01	s	SCREW +PSW 3X8
	7-682-953-09	s	SCREW +PSW 3X20
	7-688-001-11	s	W 2, MIDDLE

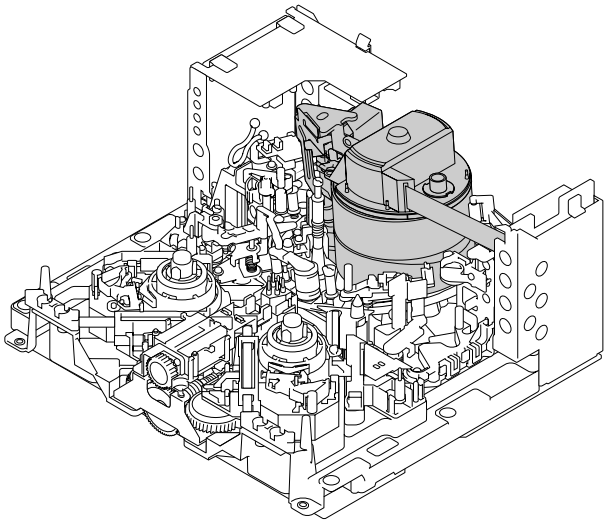

CTL/FE Head and T Drawer Block

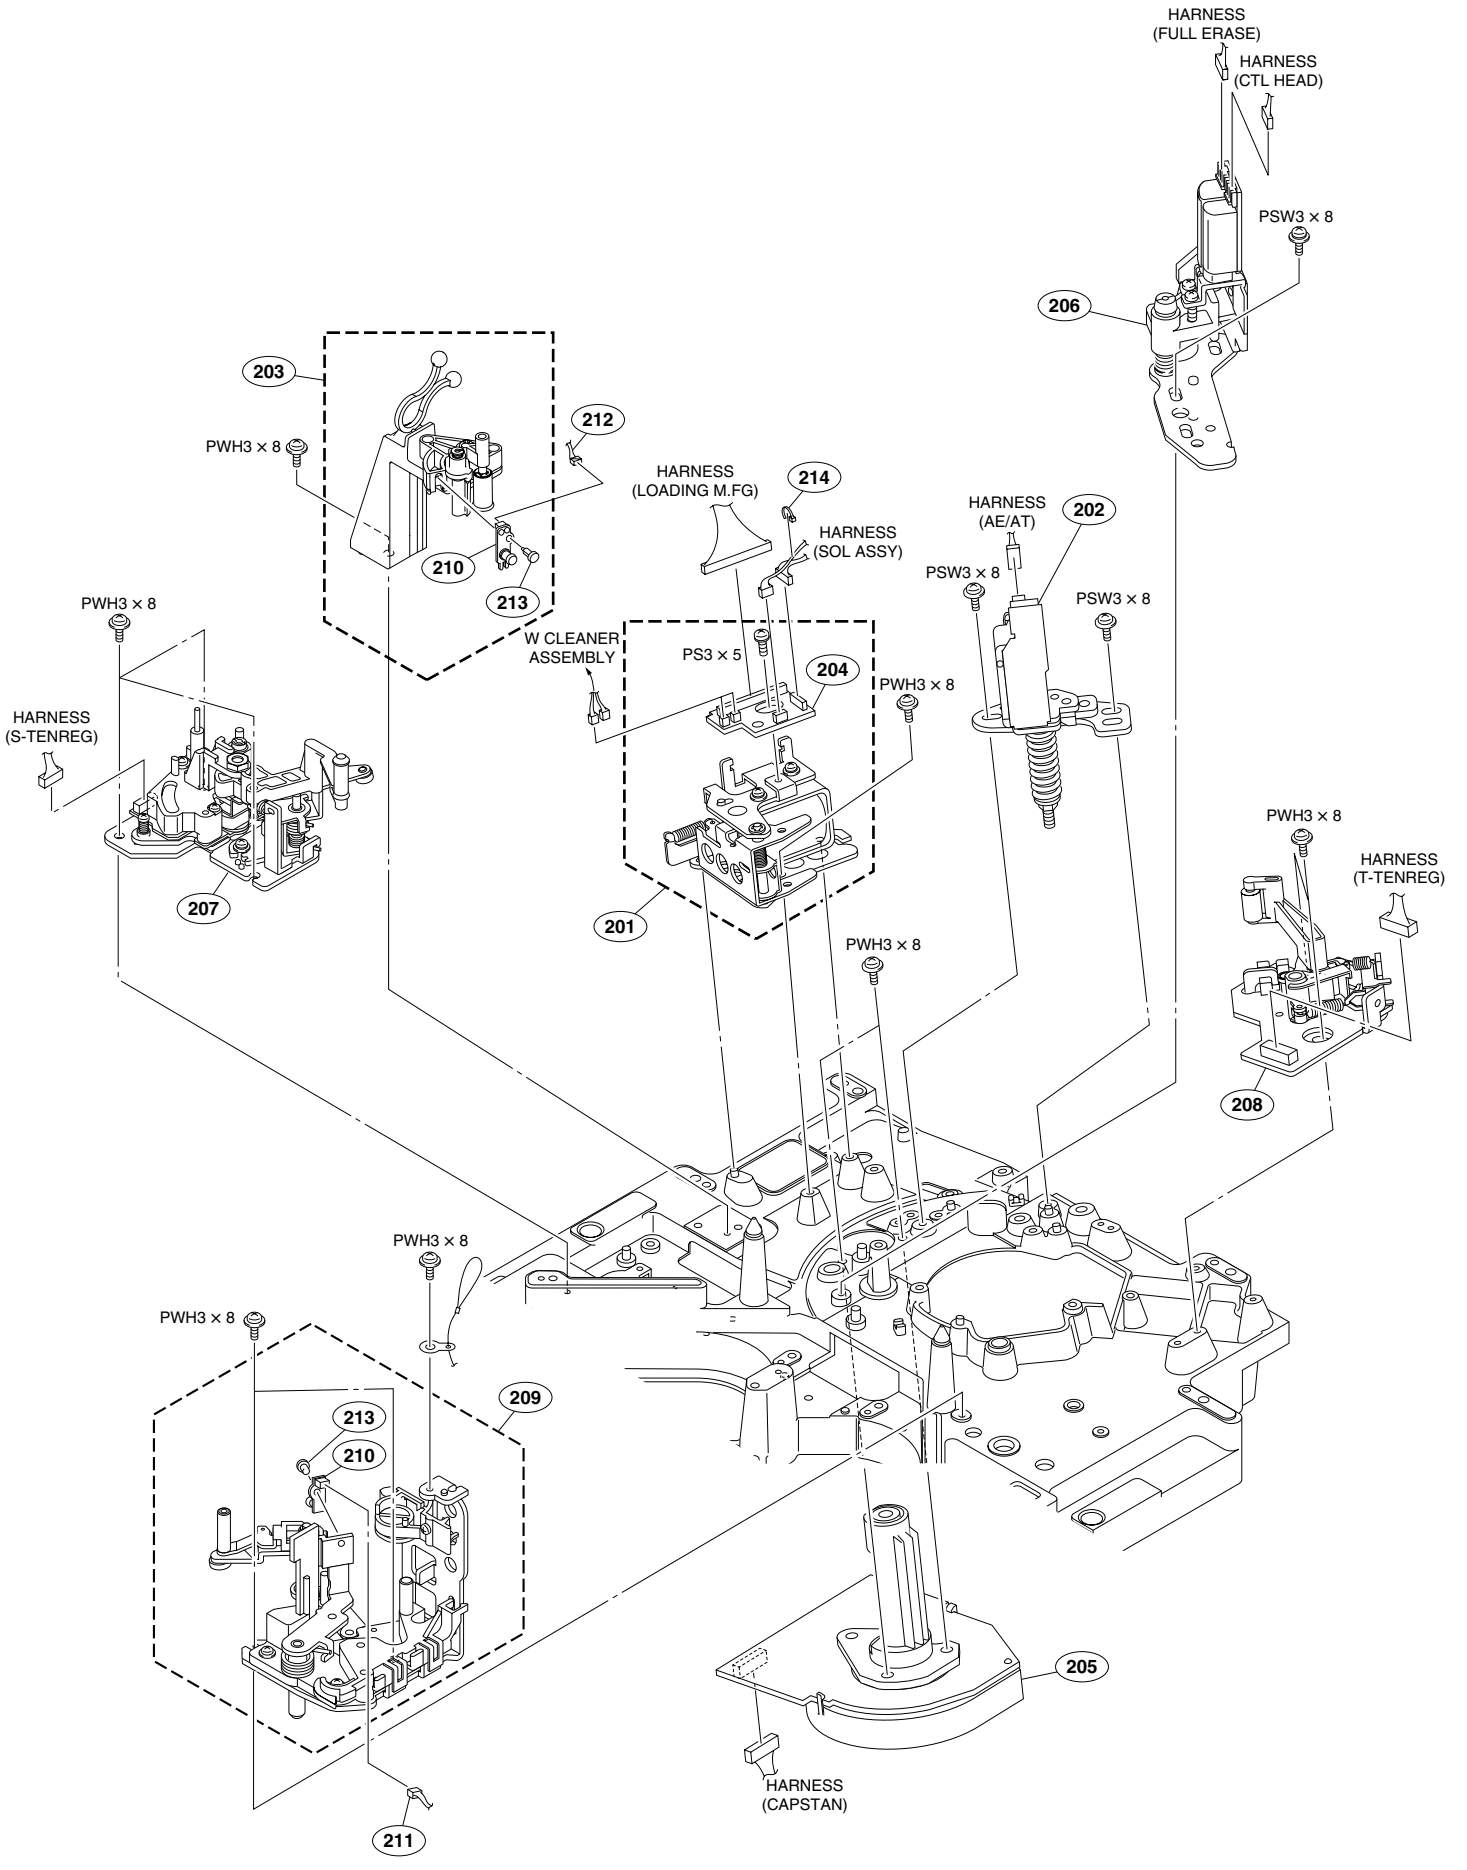

No.	Part No.	SP	Description
201	A-1231-653-A	s	PRESS ASSY, PINCH (SVC)
202	A-8267-422-E	o	HEAD ASSY, AT
203	A-8346-063-C	o	PLATE ASSY,S
204	A-8324-941-A	o	MOUNTED CIRCUIT BOARD,HN-268
205	A-8325-190-B	s	SCV16A/J-RP "CAPSTAN MOTOR"
206	A-8325-406-C	s	HEAD ASSY (RP), CTL / FE
207	A-8325-409-C	s	REGULATOR ASSY (RP), S TENSION
208	A-8325-410-C	s	T TEN ASSY (RP)
209	A-8347-625-A	s	T DRAWER ASSY (RP)
210	1-543-316-32	s	HEAD, SENSING (SMALL TYPE)
211	1-960-377-13	s	HARNESS, SUB (TOP SENS)
212	1-960-378-13	s	HARNESS, SUB (END SENS)
213	2-279-715-01	s	RIVET,NYLON
214	3-655-653-01	s	BAND (TAITON), BINDING
	7-682-646-01	s	SCREW +PS 3X5
	7-682-903-21	s	SCREW +PWH 3X8
	7-682-948-01	s	SCREW +PSW 3X8

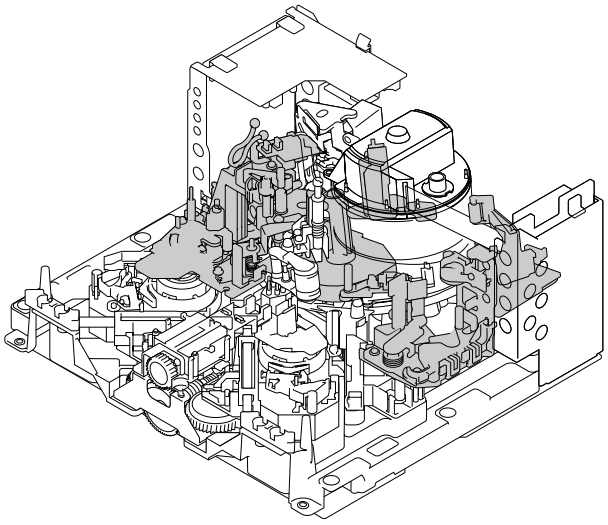

Threading Ring and Gear Box Block

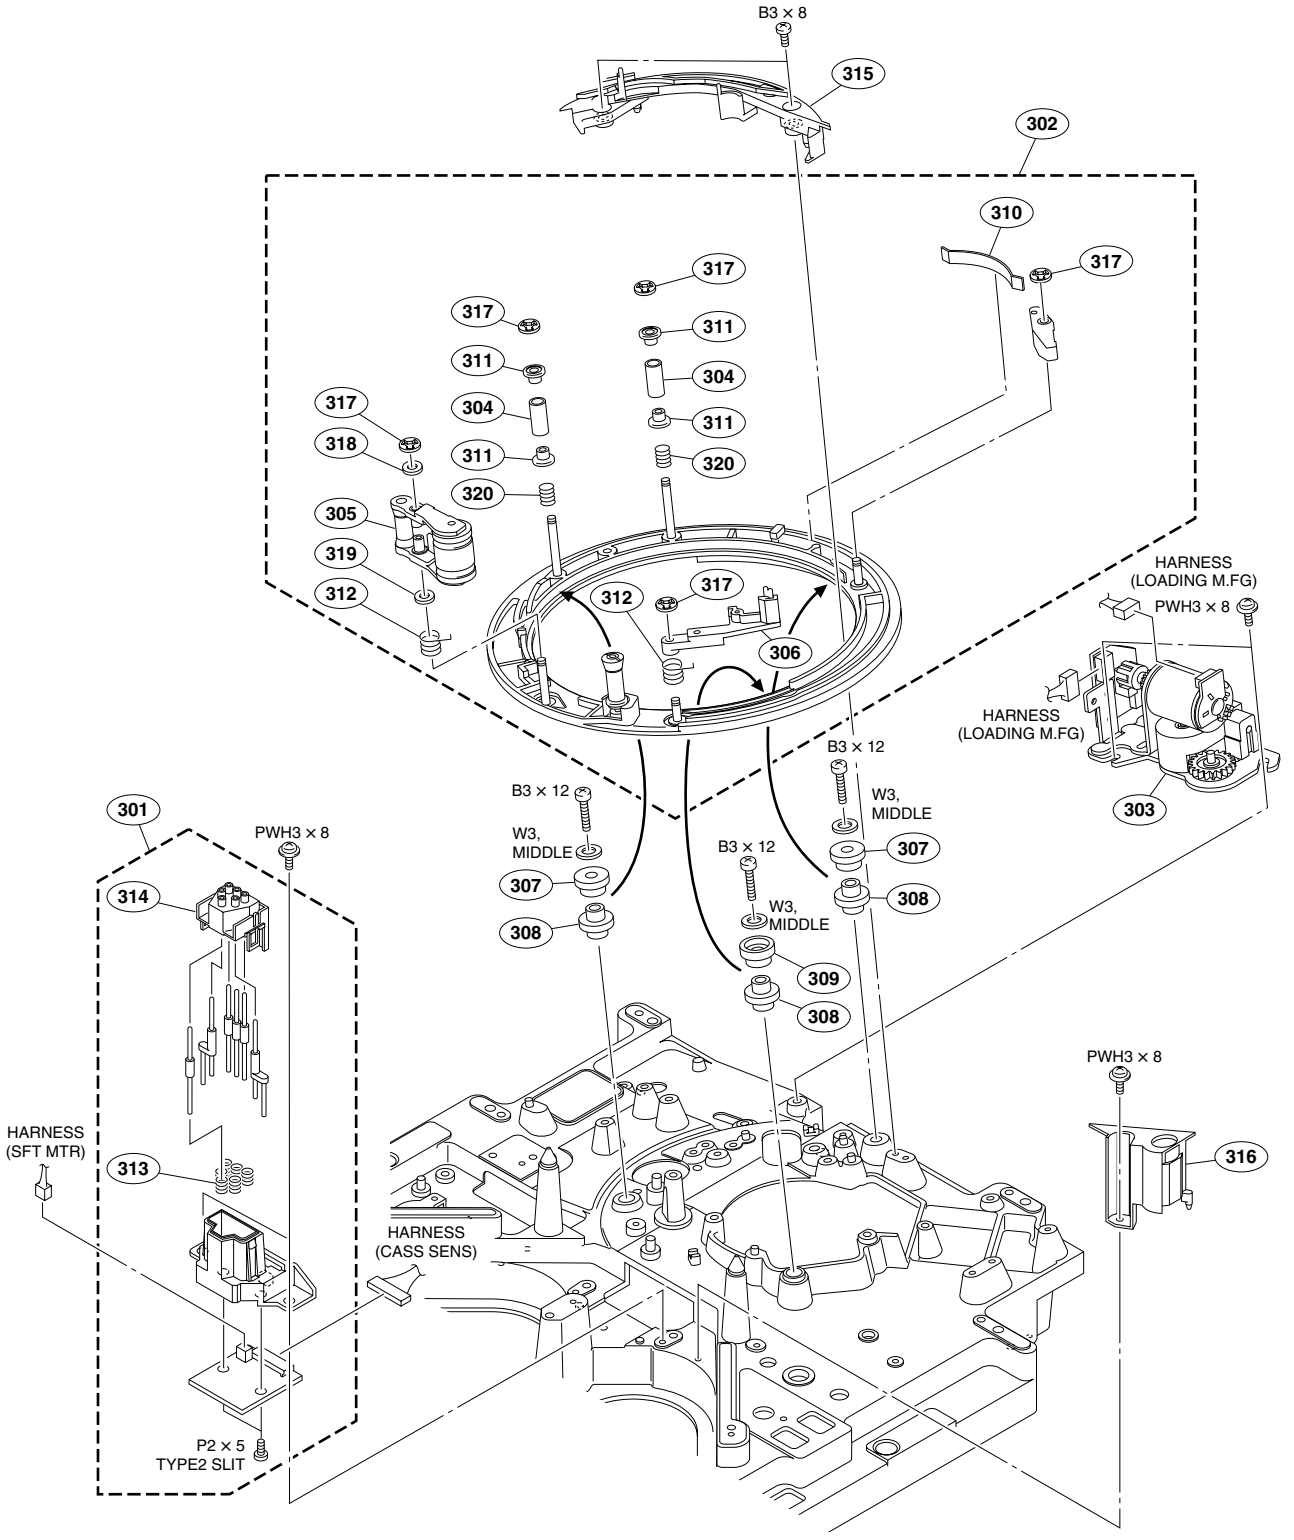

No.	Part No.	SP	Description
301	A-8279-282-A	s	SENSOR ASSY,MC
302	A-8324-937-F	s	RING ASSY
303	A-8325-414-D	s	BOX ASSY, GEAR (RP)
304	X-3167-052-2	s	ROLLER ASSY, ONEBARE
305	X-3167-054-8	s	ASSY, PINCH ARM
306	X-3605-789-1	o	ARM ASSY,CL
307	3-180-677-01	s	ROLLER, RING
308	3-180-678-01	s	SHAFT, RING ROLLER
309	3-180-679-01	s	ROLLER, (B) RING
310	3-180-772-01	s	SPRING (RG), PLATE
311	3-180-773-02	s	FLANGE, ONEBARE USE
312	3-180-849-01	s	SPRING (C), TORSION COIL
313	3-554-202-01	s	SPRING, COMPRESSION
314	3-624-970-02	o	CAP,MC
315	3-624-986-01	s	RAIL,GUIDE,CL
316	3-625-217-01	o	GUARD,PA
317	3-669-596-01	s	WASHER,2.3 (PLA)
318	3-701-439-11	s	WASHER PLASTIC (3.1X0.25)
319	3-701-439-21	s	WASHER PLASTIC (3.1X0.5)
320	4-879-563-01	s	SPRING (STEEL)
	7-682-550-09	s	SCREW +B3X12
	7-682-903-21	s	SCREW +PWH 3X8
	7-685-103-19	s	SCREW +PTP 2X5
	7-688-003-11	s	WASHER W3 (M)

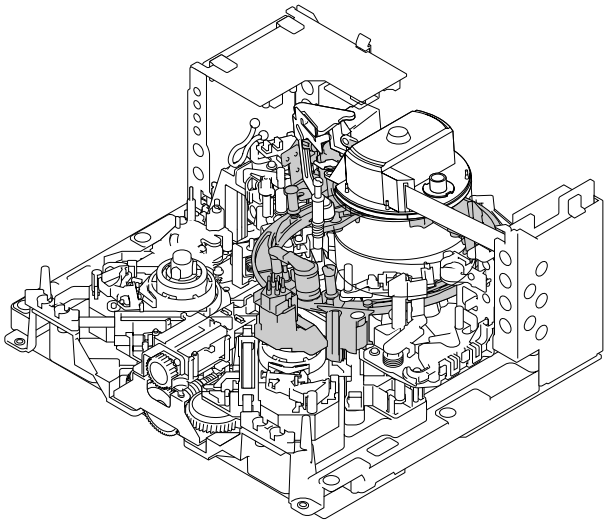

Printed Circuit Board Block

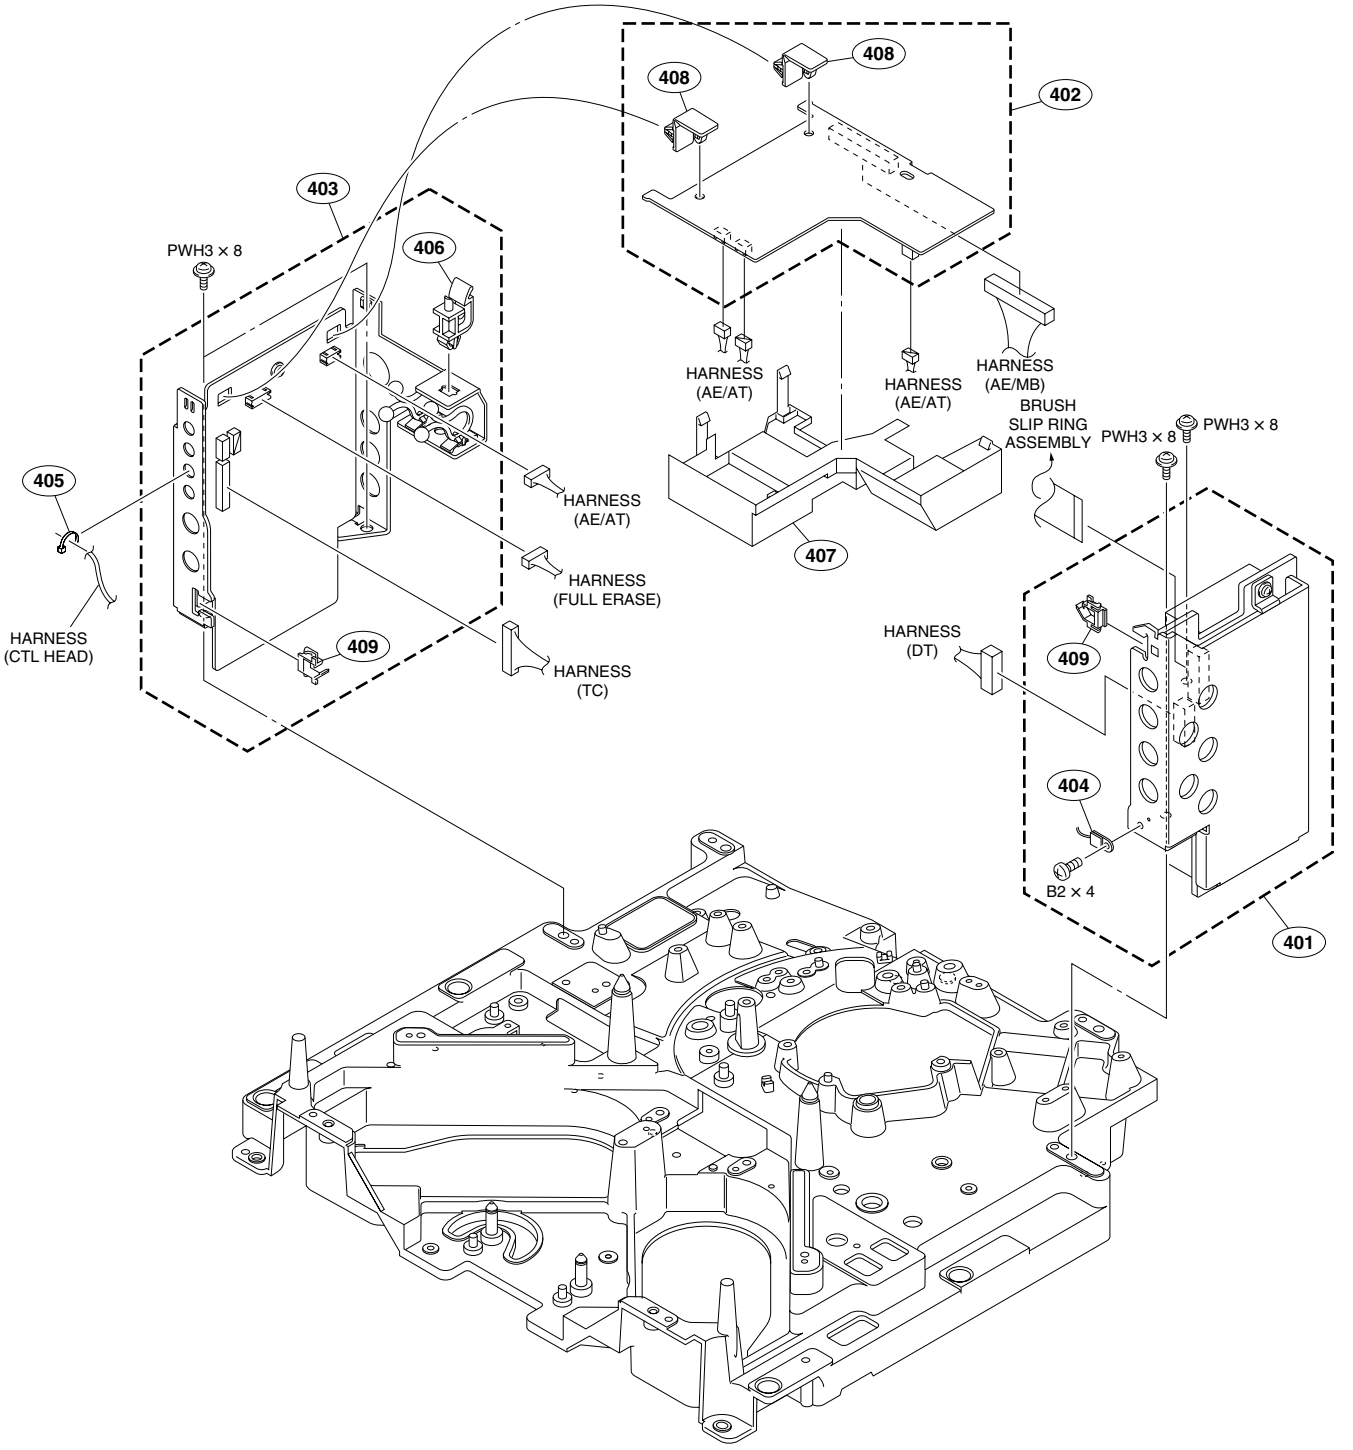

No.	Part No.	SP	Description
401	A-1376-886-A	s	MOUNTED CIRCUIT BOARD, DT-48
	(A-8324-870-B MOUNTED CIRCUIT BOARD DT-47 is changed to DT-48.)		
402	A-8327-127-B	o	MOUNTED CIRCUIT BOARD, AE-31H
403	A-1538-149-A	s	MOUNTED CIRCUIT BOARD, TC-112A
	(A-8346-867-A MOUNTED CIRCUIT BOARD TC-104A is changed to TC-112A.)		
404	1-803-490-12	s	SENSOR, DEW CONDENSATION
405	3-655-653-01	s	BAND (TAITON), BINDING
406	3-682-047-01	o	HOLDER(A),PC BOARD
407	3-690-668-02	o	COVER, AE
408	3-701-832-02	o	HINGE, CIRCUIT BOARD
409	4-641-552-01	o	SADDLE, LOCK EDGE
	7-621-772-10	s	SCREW +B2X4
	7-682-903-21	s	SCREW +PWH 3X8
	7-682-953-09	s	SCREW +PSW 3X20

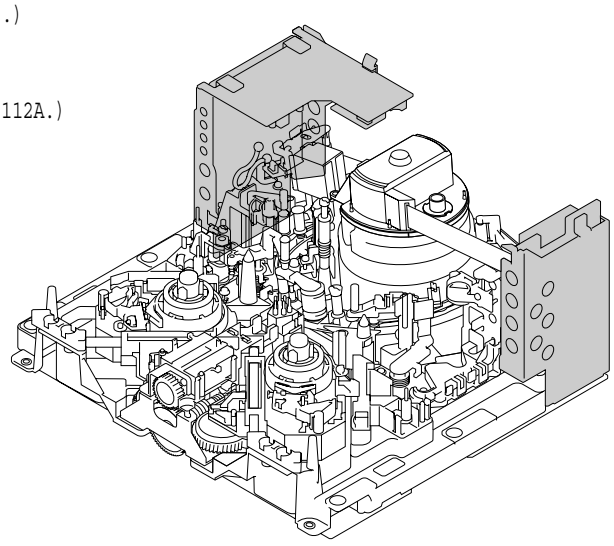

Printed Circuit Board Block 2

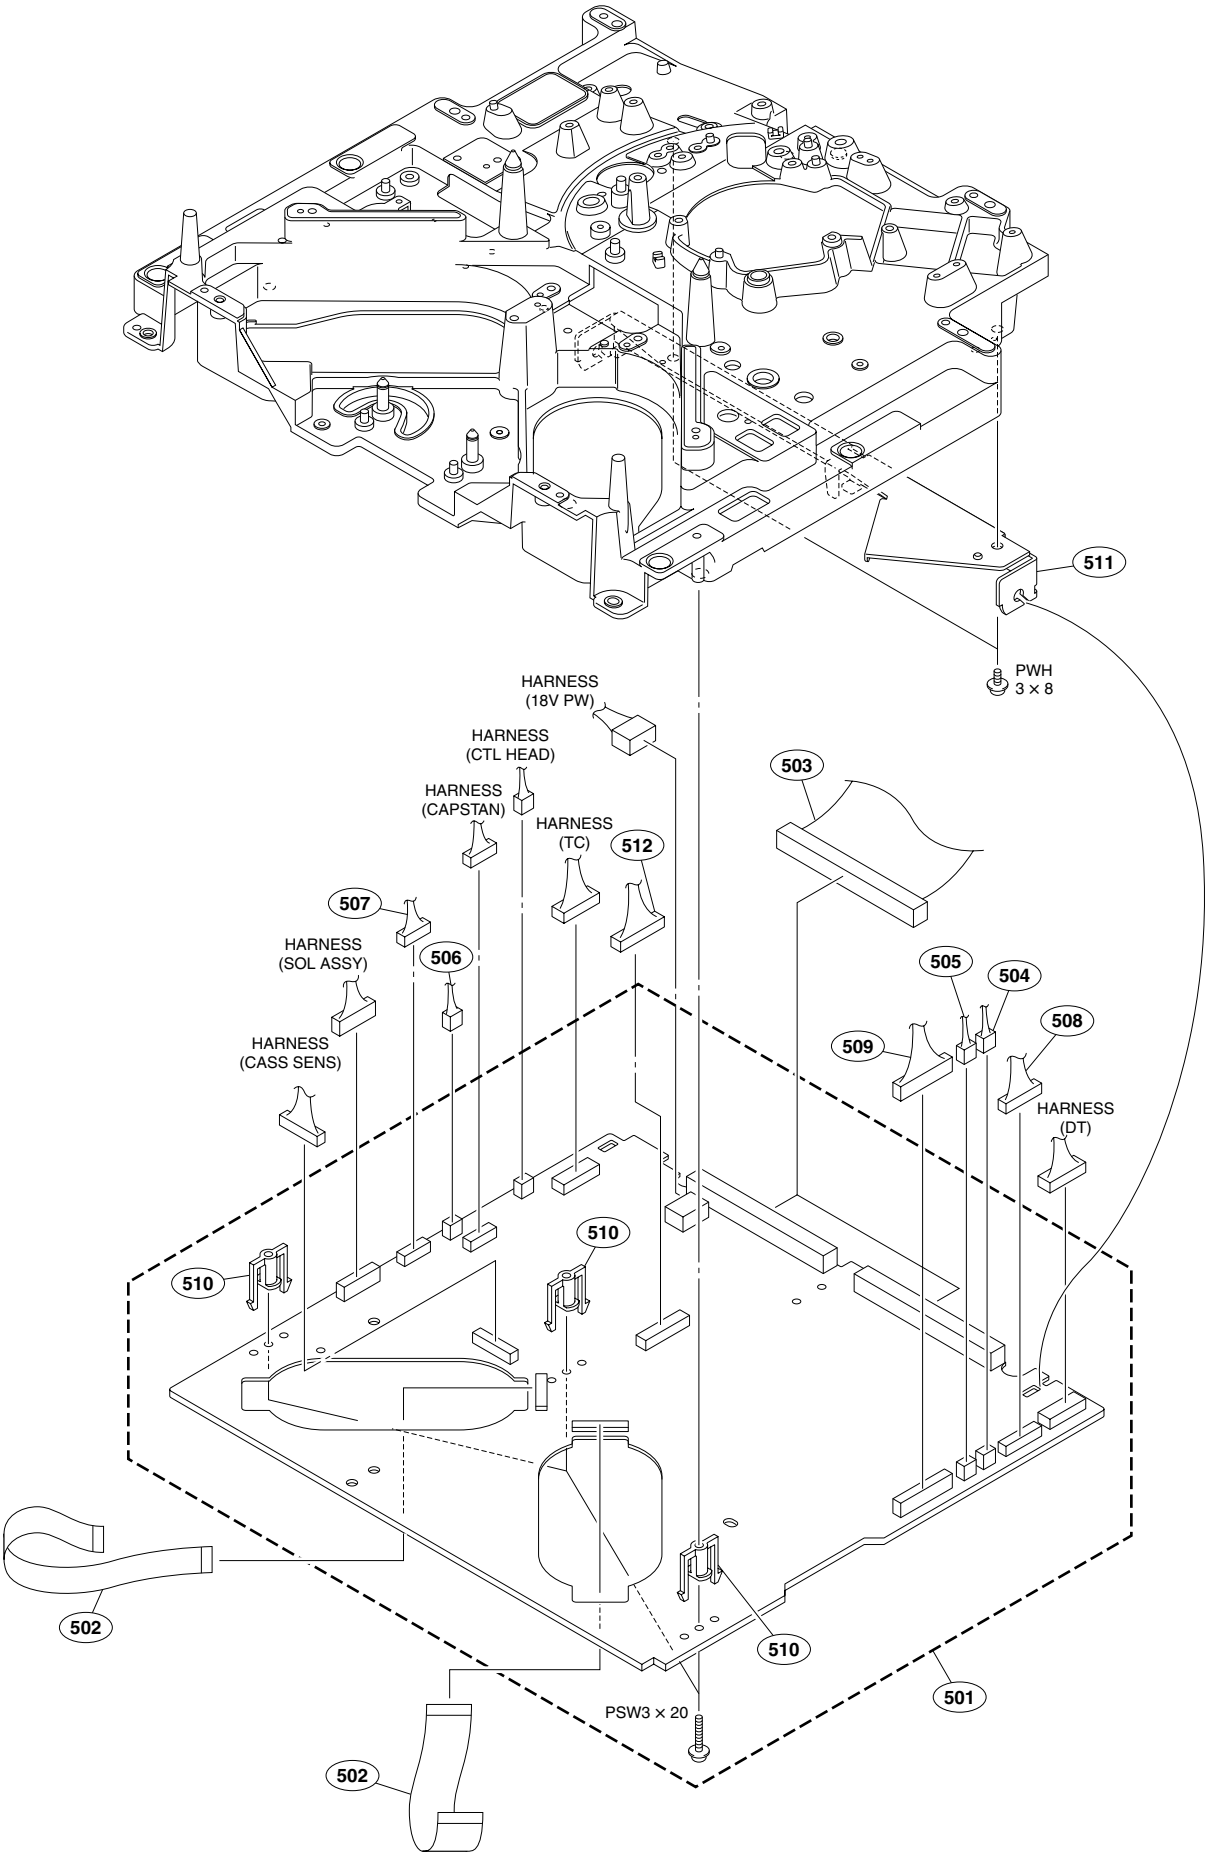

No.	Part No.	SP	Description
501	A-8346-853-C	s	MOUNTED CIRCUIT BOARD, DR-508
502	1-677-293-12	s	PRINTED WIRING BOARD, FL-276
503	1-792-489-11	o	WIRE ASSEMBLY, FLATTYPE
504	1-803-490-12	s	SENSOR, DEW CONDENSATION
505	1-960-377-13	s	HARNESS, SUB (TOP SENS)
506	1-960-378-13	s	HARNESS, SUB (END SENS)
507	1-960-399-12	s	HARNESS, SUB (S-TENREG)
508	1-960-400-11	o	HARNESS, SUB (T-TENREG)
509	1-960-401-12	o	HARNESS, SUB (CASS COM)
510	3-624-978-01	o	P HOLDER
511	3-624-991-02	s	BRACKET(A)
512	1-960-390-11	s	HARNESS, SUB (DRUM)
	7-682-903-21	s	SCREW +PWH 3X8

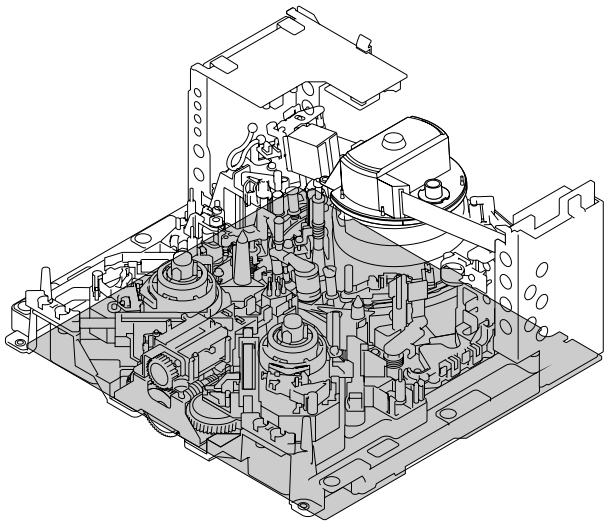

Ornamental Panel Block

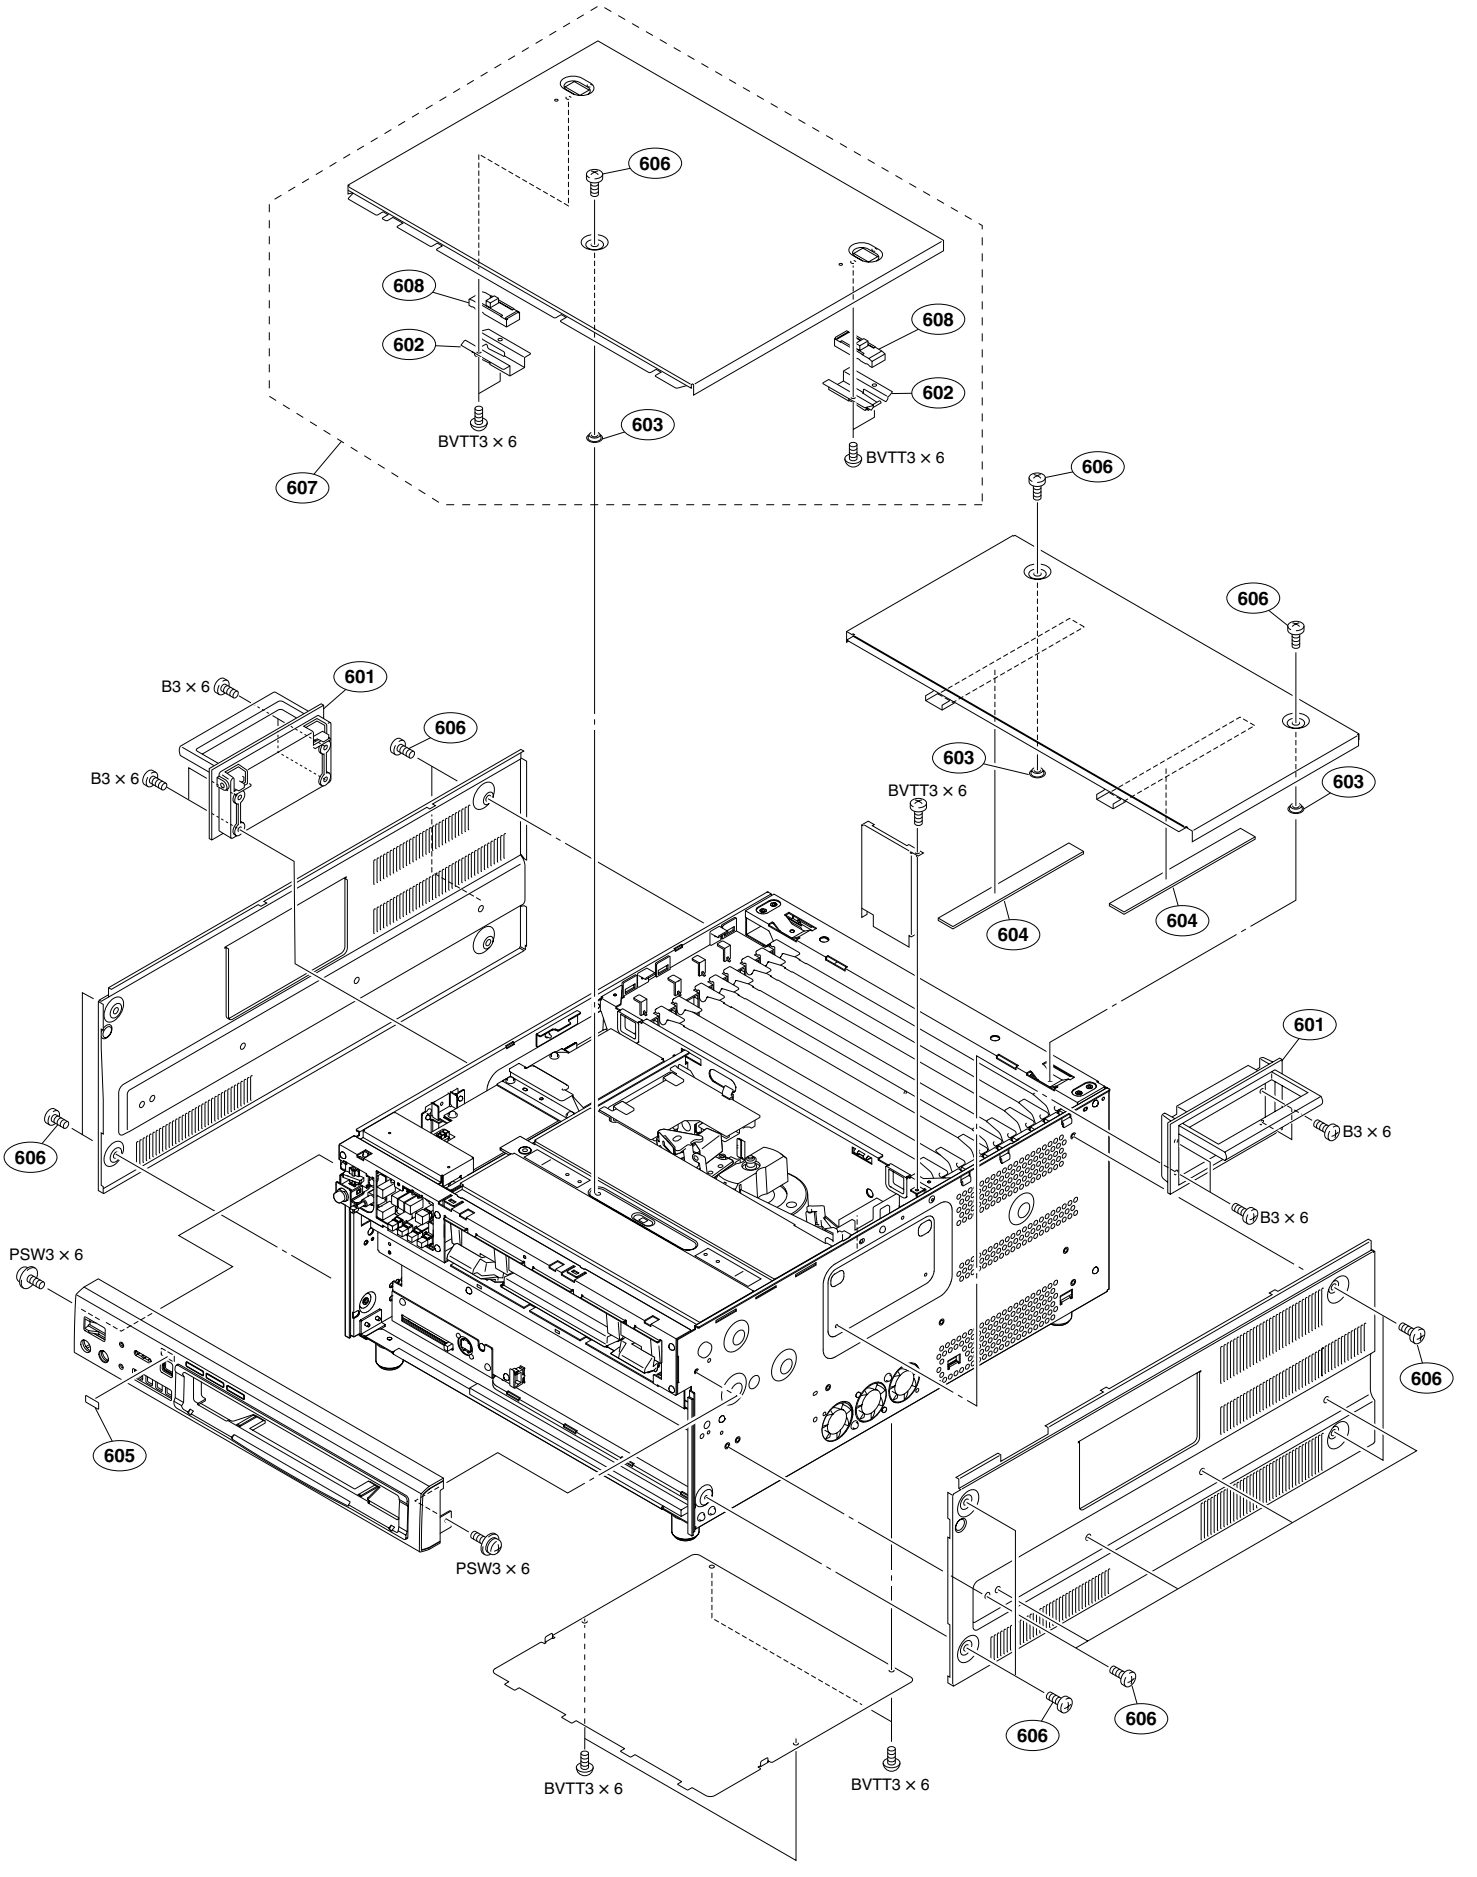

No.	Part No.	SP	Description
601	X-3608-706-1	s	HANDLE ASSY
602	3-625-756-02	o	BRACKET,SLIDER
603	3-688-102-01	o	SPACER, M
604	3-625-763-03	o	SHEET (2)
605	3-633-291-01	o	STICKER,TF
606	3-733-690-01	s	SCREW +B 4X6 (ST)
607	A-1441-536-B	s	LID (F) ASSY, UPPER
608	3-180-751-01	o	MD, SLIDER
	7-682-547-09	s	SCREW +B3X6
	7-682-903-21	s	SCREW +PWH 3X8
	7-682-947-01	s	SCREW +PSW 3X6
	7-685-871-01	s	SCREW,+BVTT 3X6

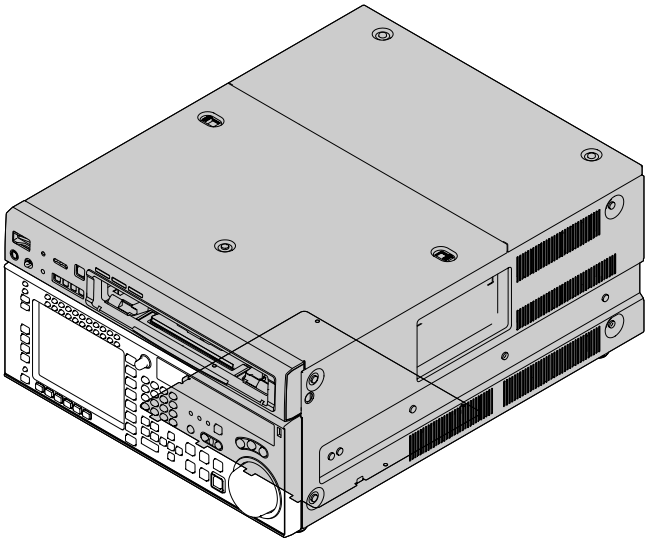

Cassette Compartment Block

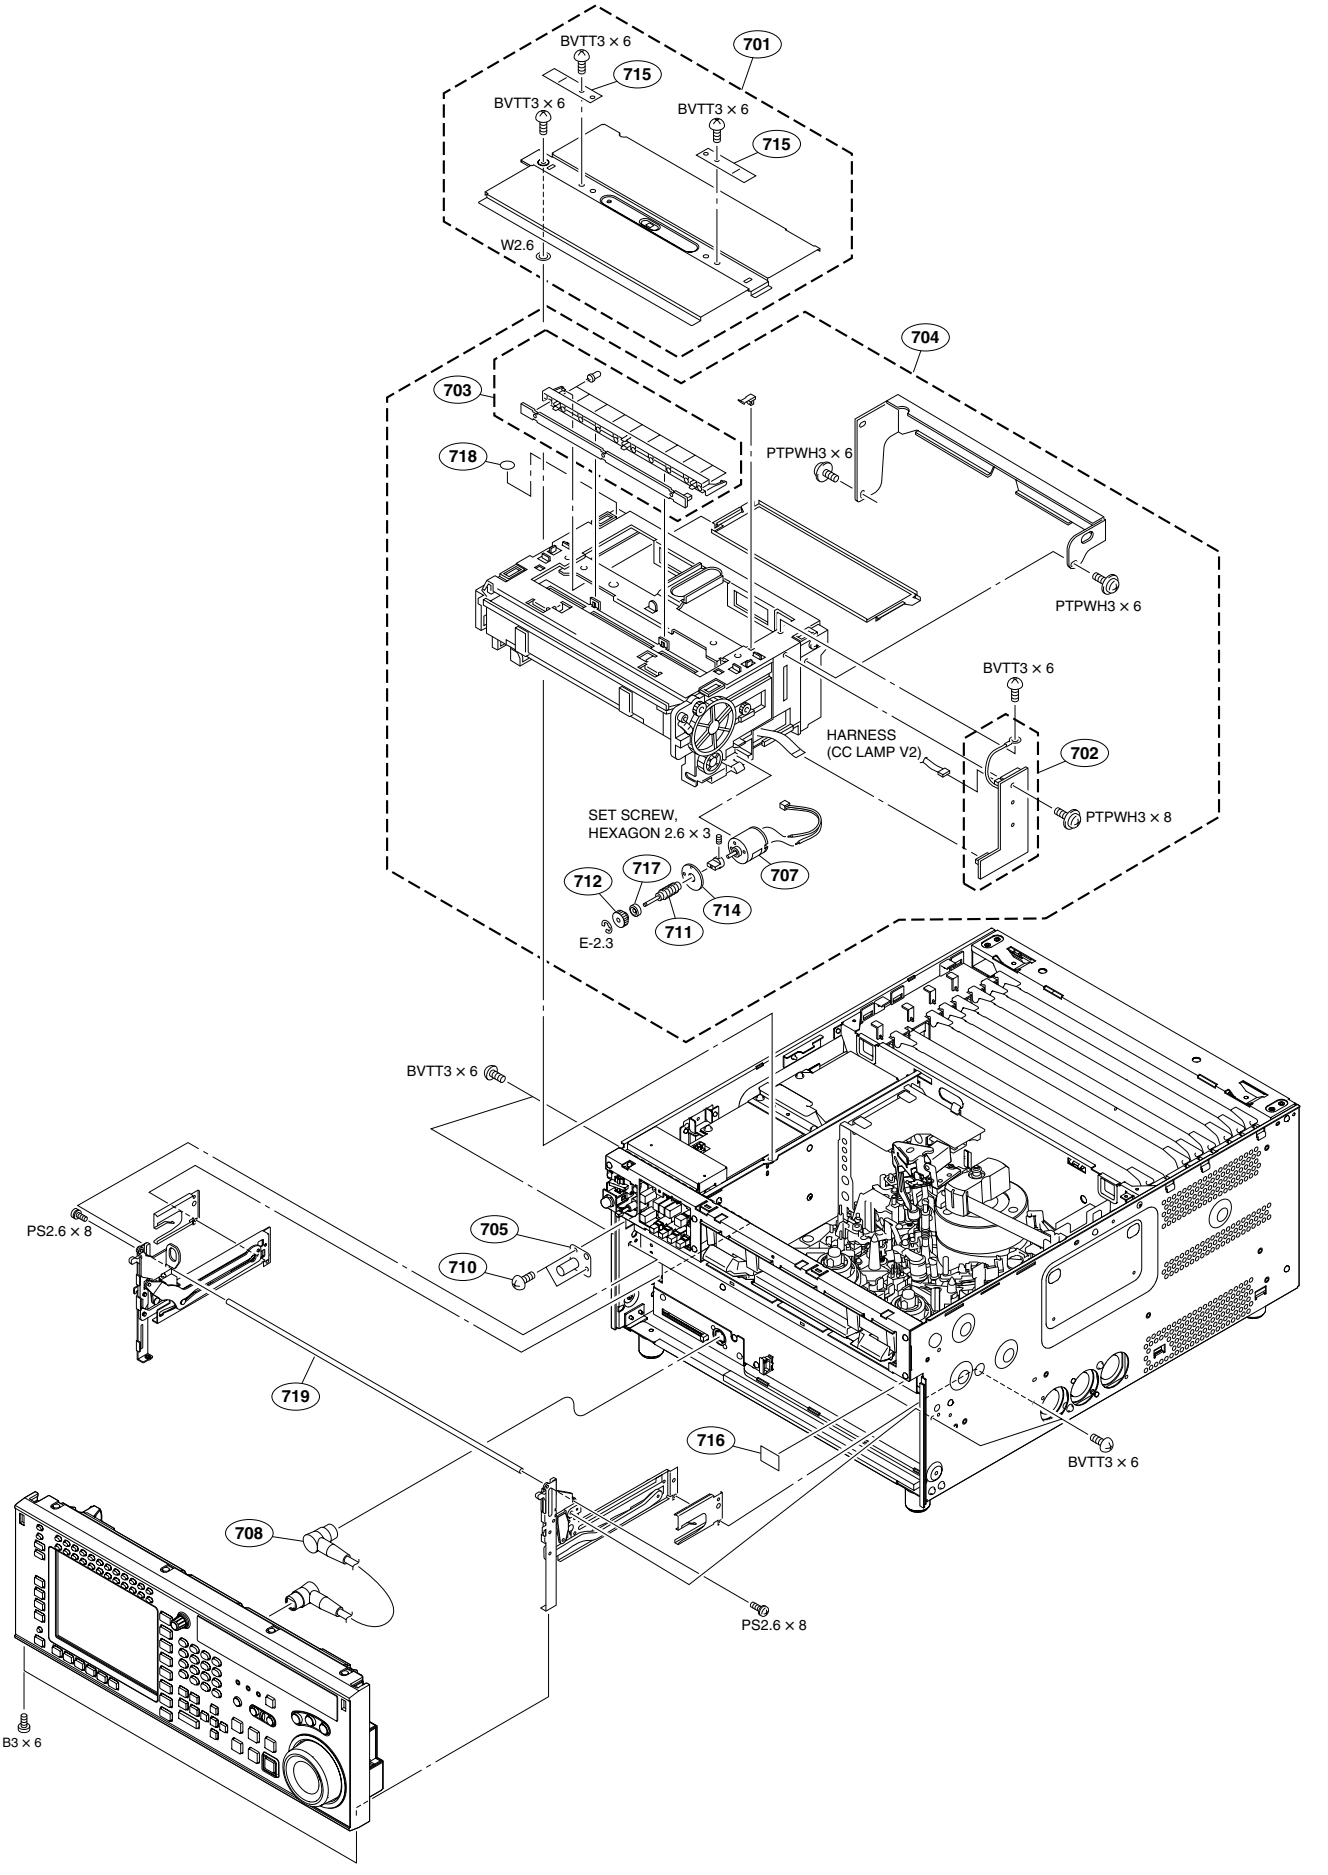

No.	Part No.	SP	Description
701	A-8279-356-H	s	PLATE ASSY, CASSETTE COMPARTME
702	A-8315-621-D	s	MOUNTED CIRCUIT BOARD, CL-29
703	A-8315-623-E	s	MOUNTED CIRCUIT BOARD, LP-81
704	A-8347-841-F	s	COMPARTMENT ASSY (S-RP)
705	X-3605-875-2	o	BASE ASSY
707	1-698-152-22	s	MOTOR (SVD-1449), DC(4.4W)
708	1-833-620-11	s	CORD, CONNECTION
710	2-580-628-01	s	SCREW, +BVST 3X6
711	3-171-418-03	s	WORM
712	3-171-419-11	s	WHEEL
714	3-182-706-01	s	SPACER
715	3-182-786-02	o	SPRING, CASSETTE COMPARTMENT
716	3-185-303-02	o	SEAL, EJECT
717	3-188-745-01	s	BALL BEARING, NON-FLANGED
718	3-855-774-01	s	SHEET,BLIND
719	3-627-755-04	o	SHAFT, HINGE
	7-621-734-09	s	SET-SCREW,HEX 2.6X3 (WP)
	7-623-923-11	s	WASHER PLASTIC (2.6X0.3)
	7-624-105-04	s	STOP RING 2.3, TYPE -E
	7-628-254-20	s	SCREW +PS 2.6X8
	7-682-547-04	s	SCREW +B3X6
	7-685-903-11	s	SCREW +PTPWH 3X6
	7-685-903-21	s	SCREW +PTPWH 3X8

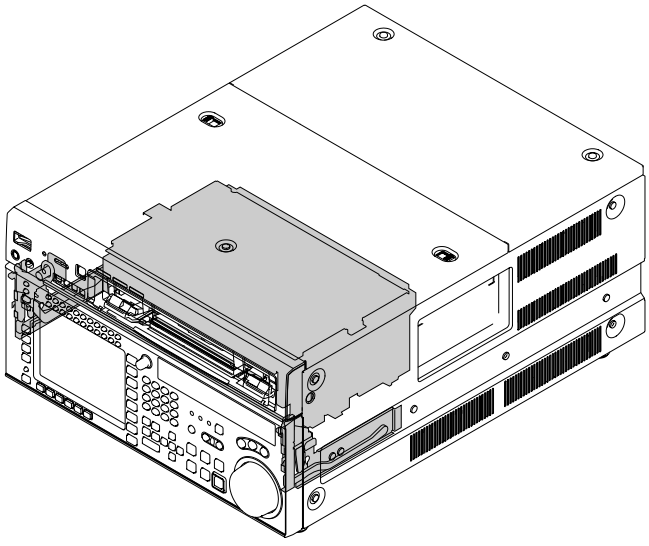

SC Guide Block and Power Unit Block

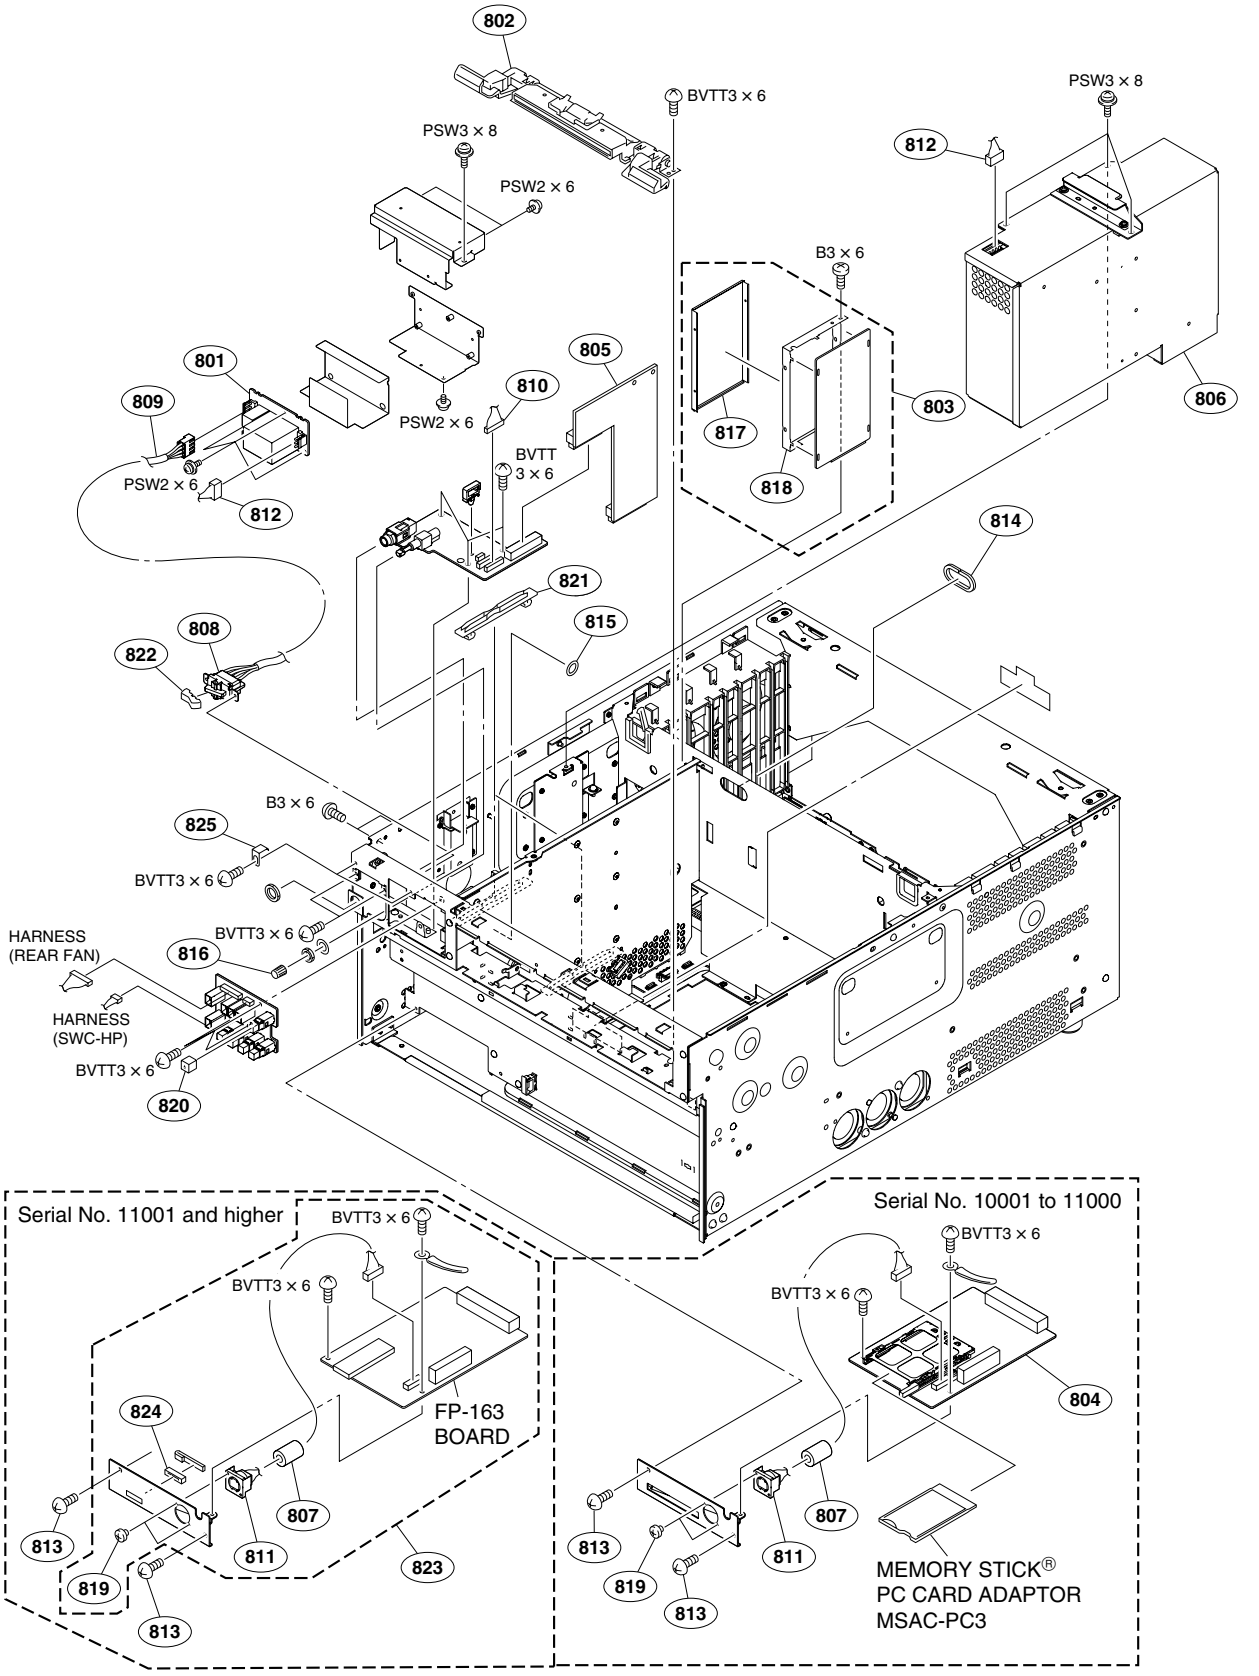

No.	Part No.	SP	Description
801	A-1444-041-A	s	MOUNTED CIRCUIT BOARD, FL-350
802	A-8279-311-H	s	GUIDE ASSY, SC
803	A-8327-129-A	o	MOUNTED CIRCUIT BOARD, CUE-13
804	A-1317-730-A	s	MOUNTED CIRCUIT BOARD, FP-155
805	A-1317-739-A	s	MOUNTED CIRCUIT BOARD, DIO-86
806	⚠ A-1441-529-B	s	REGULATOR ASSY,SW
807	1-500-082-11	s	CLAMP, SLEEVE FERRITE
808	⚠ 1-762-953-11	s	SWITCH, POWER
809	⚠ 1-960-382-21	s	HARNESS, SUB (AC PW SW (SRW))
810	1-961-178-11	o	HARNESS, SUB (LED-HP)
811	1-965-382-11	s	HARNESS, SUB (FP-KY 20P V2)
812	1-965-921-12	s	HARNESS, SUB (FL-PS)
813	2-580-628-01	s	SCREW, +BVST 3X6
814	3-556-097-01	o	BUSHING
815	3-824-174-01	s	BUSHING,RUBBER
816	3-625-762-02	s	KNOB,HP
817	3-629-688-01	o	SHIELD CASE(U),CUE
818	3-629-689-01	o	SHIELD CASE(B),CUE
819	3-729-076-11	s	SCREW (+B) (2X4)
820	3-708-895-01	s	CAP
821	4-836-132-01	o	SUPPORT, CIRCUIT BOARD
822	3-688-814-41	s	CAP, SWITCH
823	A-1441-535-A	s	FP FIXED PLATE ASSY
824	3-272-391-01	s	CUSHION, FP
825	4-152-044-01	s	SPRING (LED), FP
	7-628-000-05	s	+PSW 2X6
	7-682-547-04	s	SCREW +B3X6
	7-682-948-09	s	SCREW +PSW 3X8
	7-685-871-01	s	SCREW,+BVTT 3X6

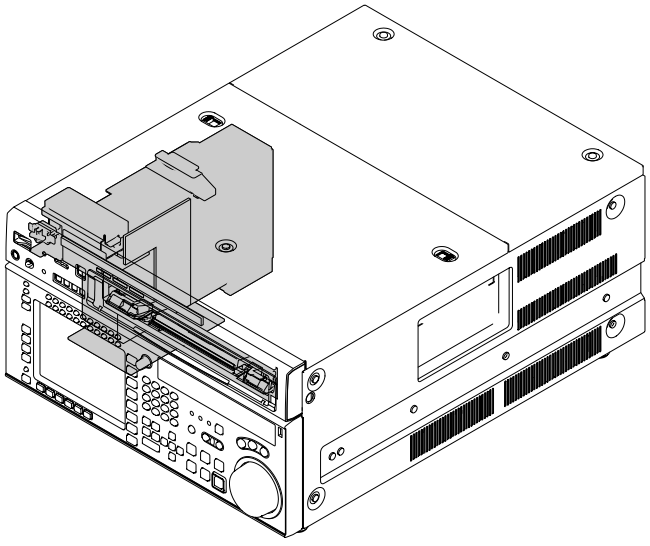

Motherboard and DC Fans

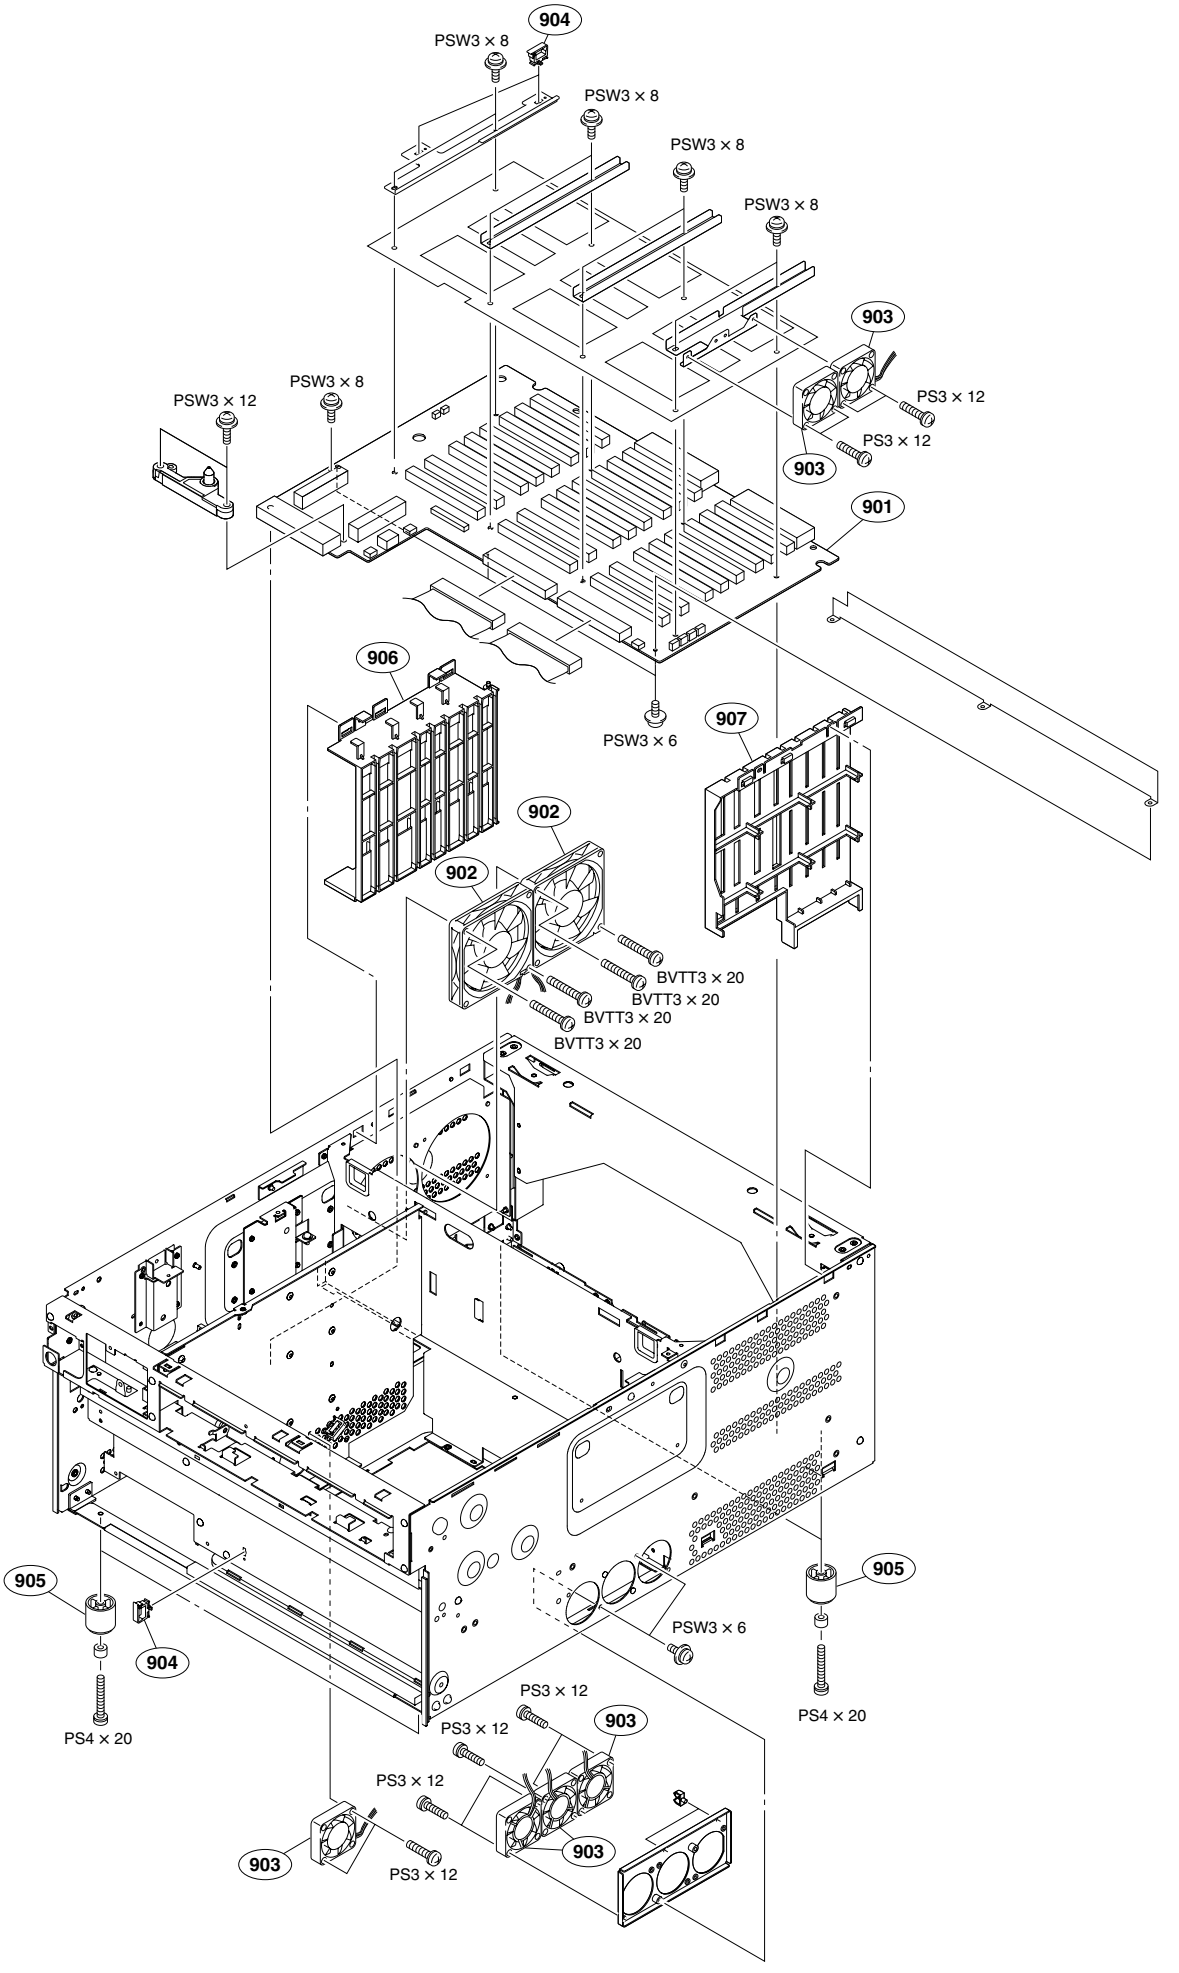

No.		Part No.	SP	Description
901		A-1317-703-A	s	MOUNTED CIRCUIT BOARD, MB-1101
902	⚠	1-787-433-13	s	FAN, DC
903	⚠	1-787-725-11	s	FAN, DC (40 SQUARE)
904		3-632-494-01	s	RE-USE CLAMP
905		3-642-656-01	s	FOOT
906		3-285-632-01	s	GUIDE RALL (L), PCB
907		3-285-633-01	s	GUIDE RALL (R), PCB
		7-682-947-01	s	SCREW +PSW 3X6
		7-682-948-01	s	SCREW +PSW 3X8
		7-682-950-01	s	SCREW +PSW 3X12
		7-682-650-09	s	SCREW +PS 3X12(EP-FE/ZNBK/CM2)
		7-682-666-09	s	SCREW +PS 4X20
		7-685-877-09	s	SCREW +BVTT 3X20(EP-FE/ZNBK/CM

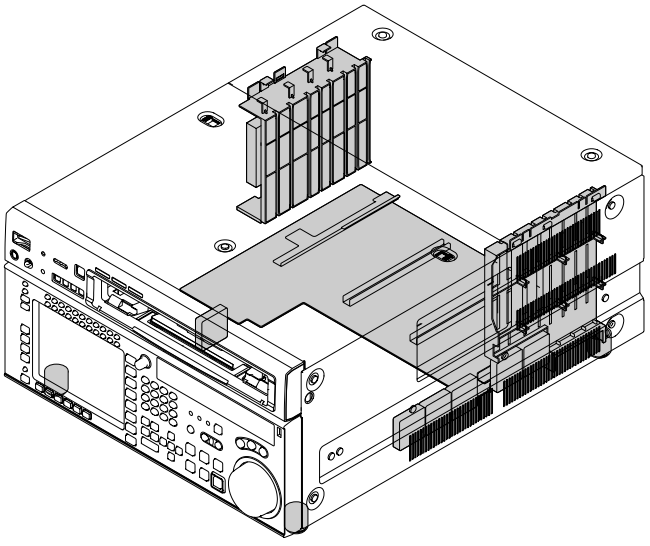

Plug-in Board Block

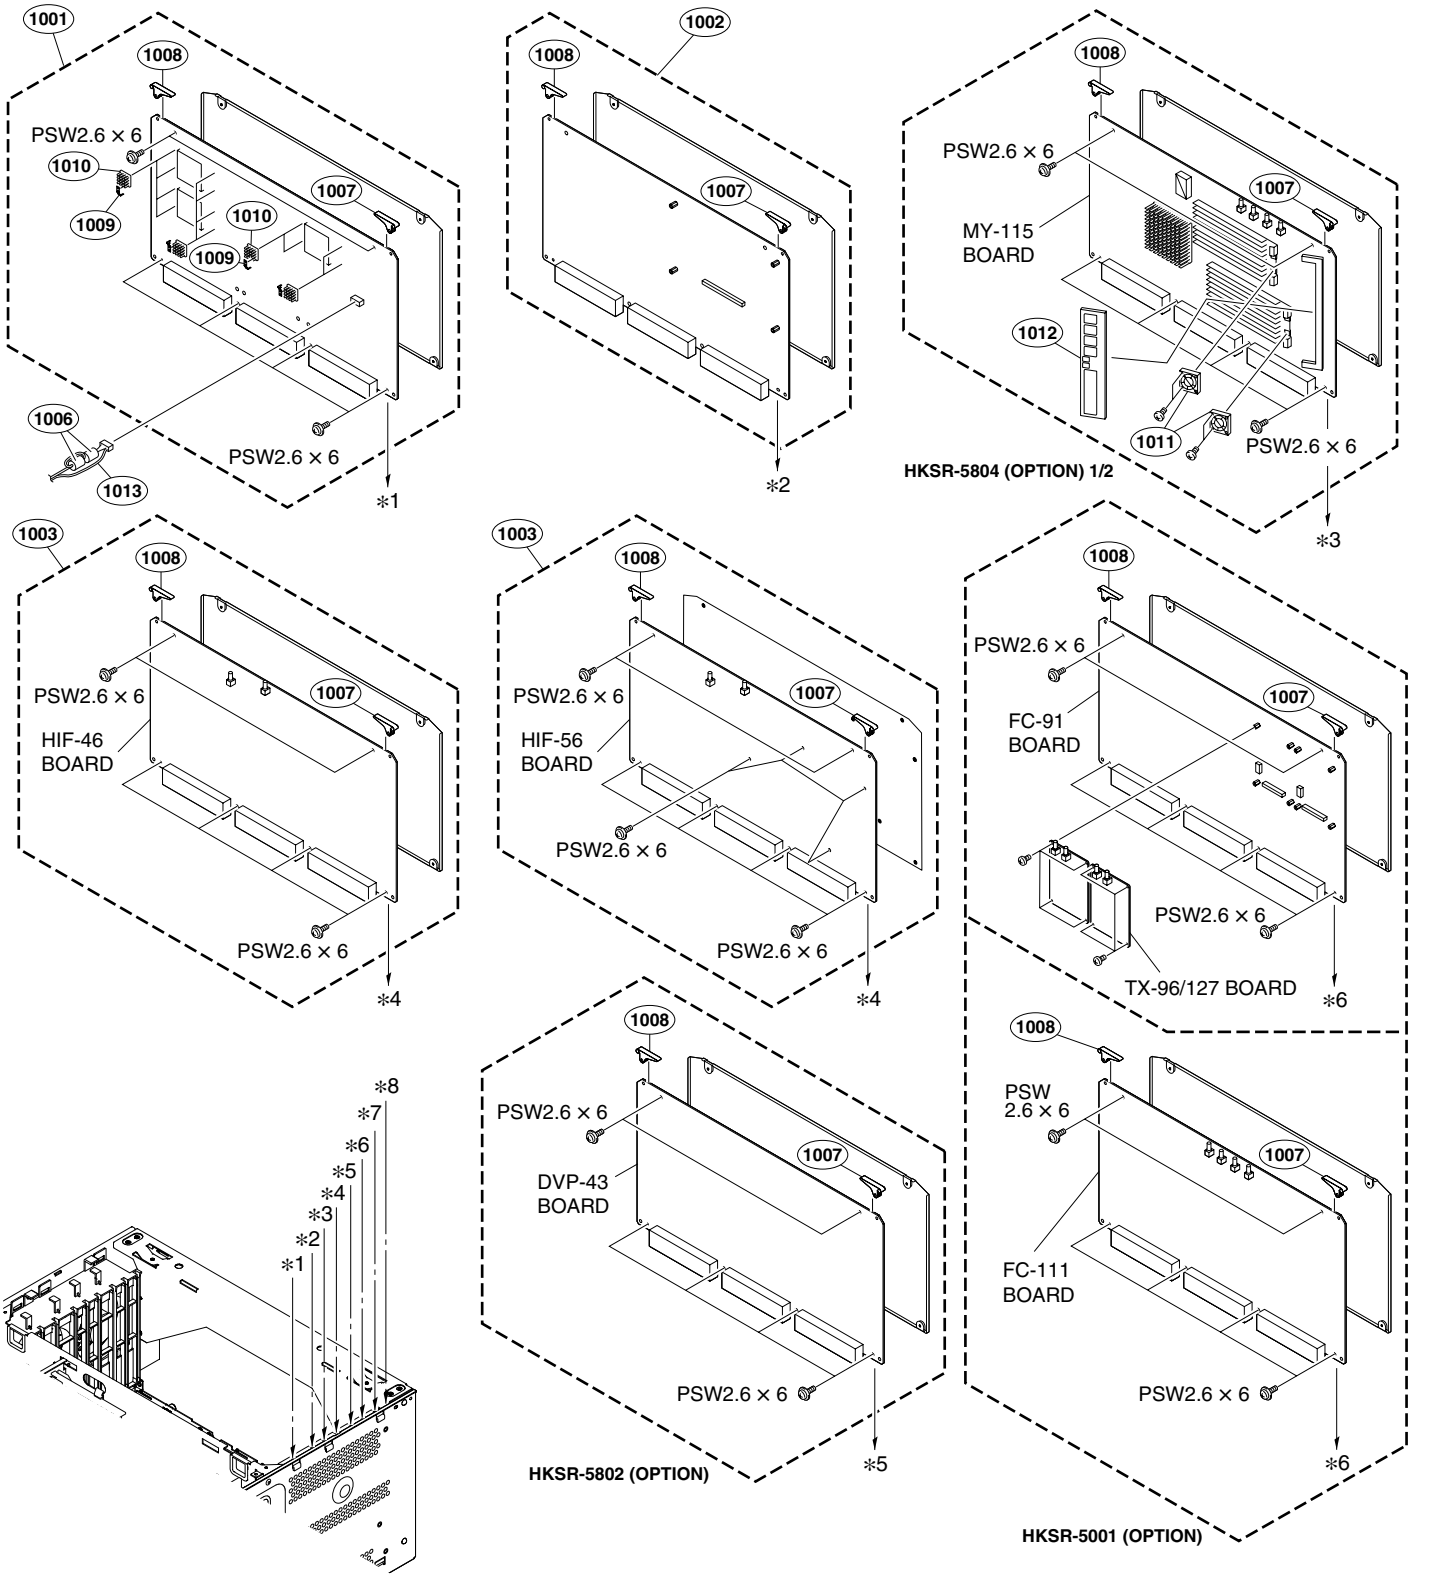

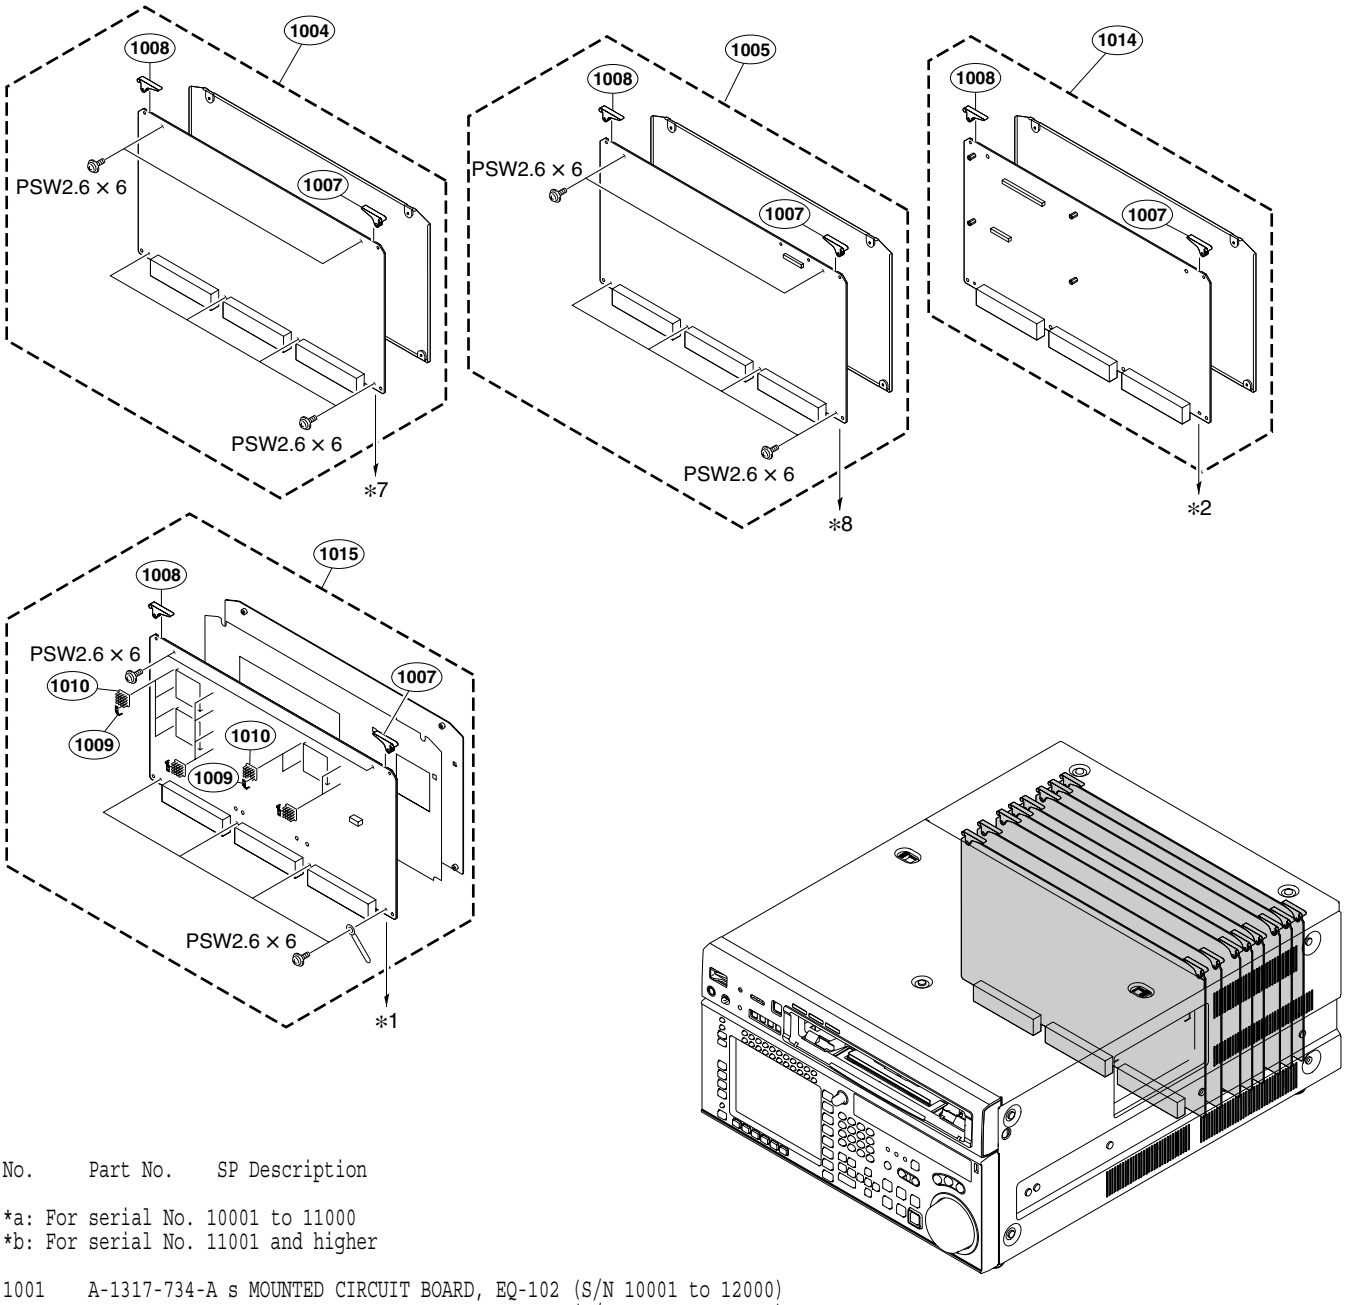

No. Part No. SP Description

*a: For serial No. 10001 to 11000
*b: For serial No. 11001 and higher

1001 A-1317-734-A s MOUNTED CIRCUIT BOARD, EQ-102 (S/N 10001 to 12000)
1002 A-1317-735-A s MOUNTED CIRCUIT BOARD, HPR-22 (S/N 10001 to 12000)
1003 *a A-1317-736-A s MOUNTED CIRCUIT BOARD, HIF-46
*b A-1704-158-A s MOUNTED CIRCUIT BOARD, HIF-56
1004 A-1317-737-A s MOUNTED CIRCUIT BOARD, APR-81 (S/N 10001 to 12000)
A-1768-615-A s MOUNTED CIRCUIT BOARD, APR-91 (S/N 12001 and Higher)
1005 A-1317-738-A s MOUNTED CIRCUIT BOARD, SS-102

1006 1-543-793-11 s FILTER, CLAMP (FERRITE CORE)
1007 3-179-084-11 s LEVER (R), PC BOARD
1008 3-179-085-11 s LEVER (L), PC BOARD
1009 3-182-839-01 o BRACKET, HEAT SINK RETAINER
1010 3-182-840-02 s HEAT SINK (EQ)

1011 ⚠ 1-787-146-11 s FAN, DC (SQUARE 30)
1012 6-713-050-01 s IC MT9VDDF6472Y335F1
1013 1-963-571-11 s HARNESS, SUB RF REC (HDW)
1014 A-1768-613-A s MOUNTED CIRCUIT BOARD, HPR-35 (S/N 12001 and Higher)
1015 A-1768-614-A s MOUNTED CIRCUIT BOARD, EQ-109 (S/N 12001 and Higher)

7-621-759-45 s SCREW +PSW 2.6X6

Connector Panel Block

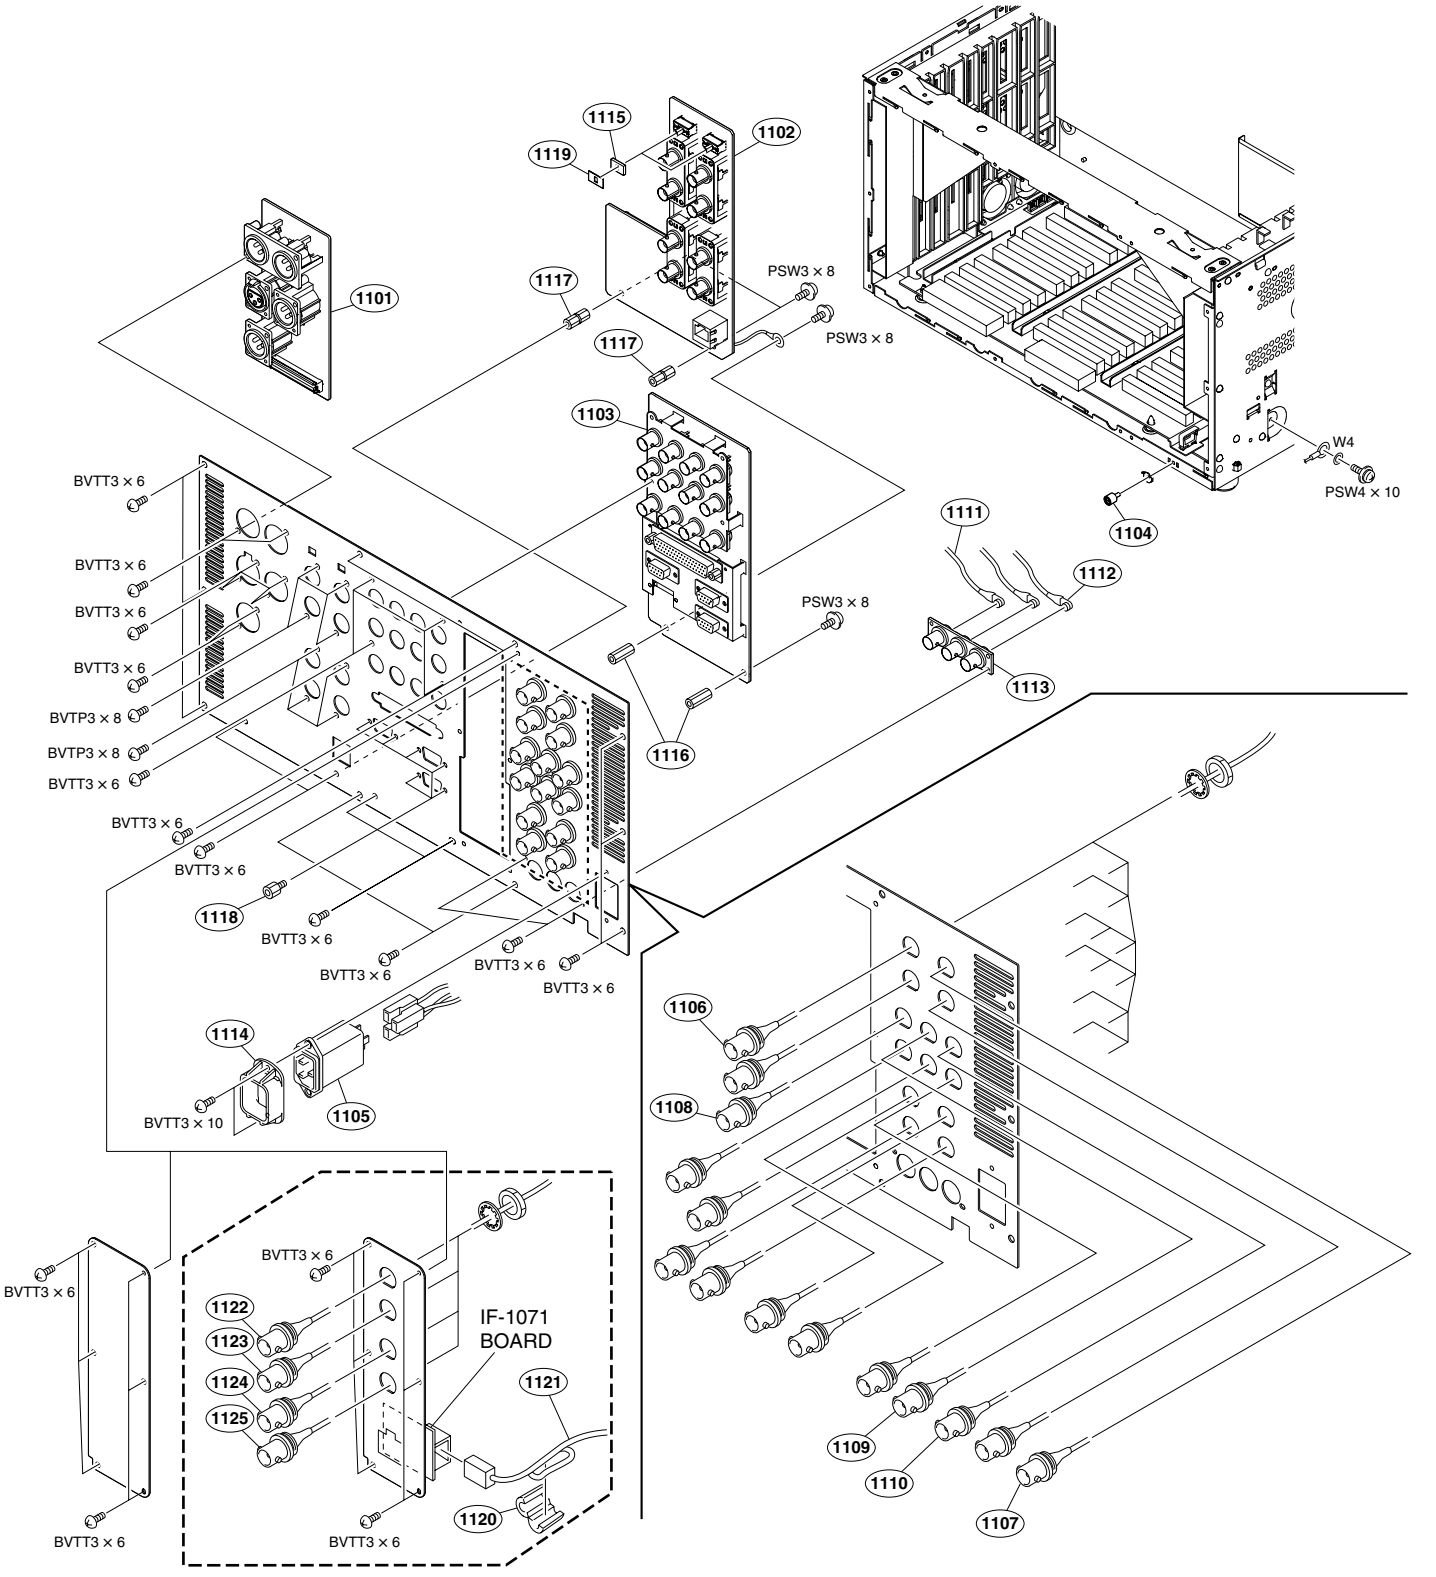

HKSR-5804 (OPTION) 2/2

No.	Part No.	SP	Description
1101	A-1317-731-A	s	MOUNTED CIRCUIT BOARD, CP-397
1102	A-1317-732-A	s	MOUNTED CIRCUIT BOARD, CP-398
1103	A-1317-733-A	s	MOUNTED CIRCUIT BOARD, CP-399
1104	X-2068-004-1	s	TERMINAL ASSY
1105 ⚠	1-251-378-12	s	INLET (WITH NOISE FILTER)
1106	1-757-485-12	s	CABLE ASSY, COAXIAL
1107	1-757-486-12	s	CABLE ASSY, COAXIAL
1108	1-757-487-12	s	CABLE ASSY, COAXIAL
1109	1-757-488-12	s	CABLE ASSY, COAXIAL
1110	1-757-489-12	s	CABLE ASSY, COAXIAL
1111	1-792-477-12	o	CABLE ASSEMBLY, COAXIAL
1112	1-792-478-12	o	CABLE ASSEMBLY, COAXIAL
1113	1-794-231-12	s	CONVERTER, COAXIAL CONNECTOR
1114	2-990-241-02	s	HOLDER (A), PLUG
1115	3-173-384-01	o	SPACER, ORNAMENTAL PLATE
1116	3-625-714-03	o	SUPPORT,HEXAGON(1)
1117	3-625-715-03	o	SUPPORT,HEXAGON(2)
1118	3-673-910-32	s	SCREW, CONNECTOR
1119	3-717-394-04	s	PLATE (SMALL), ORNAMENTAL, SW
1120	1-500-386-21	s	FILTER, CLAMP (FERRITE CORE)
1121	1-827-008-21	s	CORD CONNECTION
1122	1-835-865-11	s	CABLE ASSY, COAXIAL (6)
1123	1-835-866-11	s	CABLE ASSY, COAXIAL (7)
1124	1-835-867-11	s	CABLE ASSY, COAXIAL (K)
1125	1-835-868-11	s	CABLE ASSY, COAXIAL (L)
	7-682-962-01	s	SCREW +PSW 4X10
	7-682-948-01	s	SCREW +PSW 3X8
	7-685-647-79	s	SCREW +BVTP3X10(EP-FE/ZNBK/CM2
	7-685-871-01	s	SCREW,+BVTT 3X6
	7-685-873-09	s	SCREW,+BVTT 3X10
	7-688-004-11	o	W 4, MIDDLE

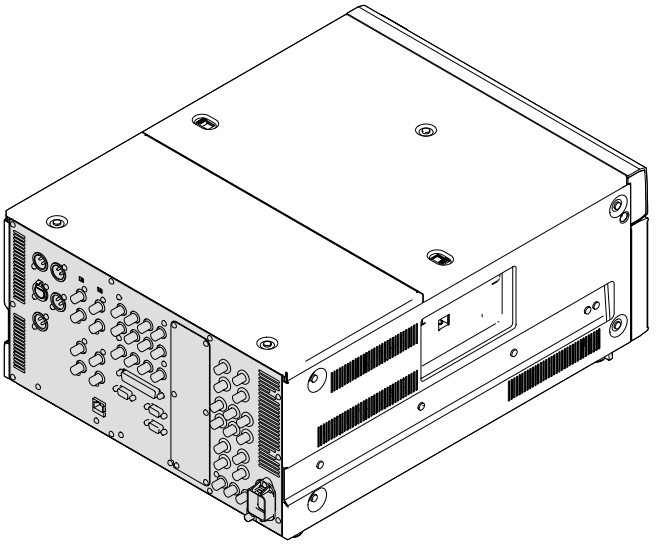

Control Panel Block (S/N 10001 to 12000)

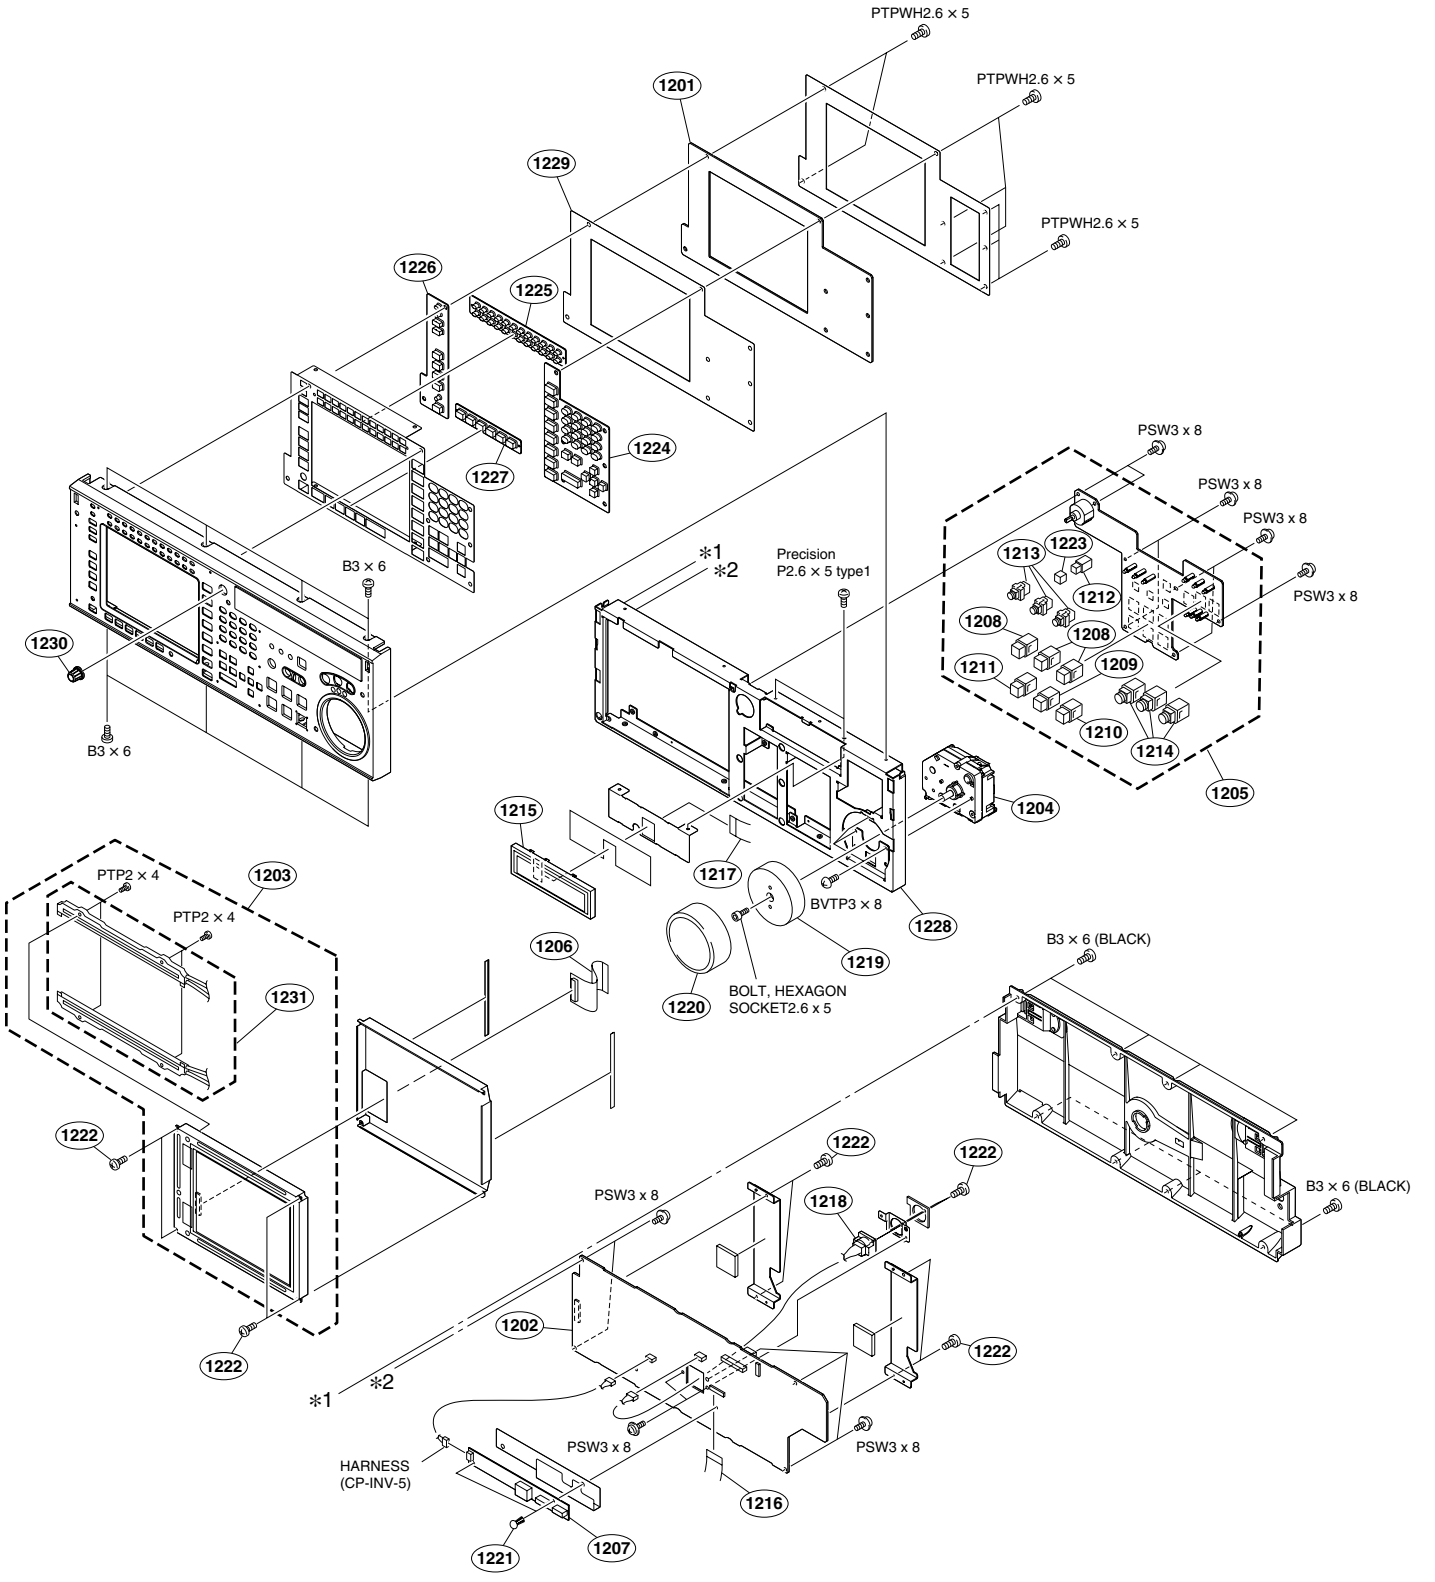

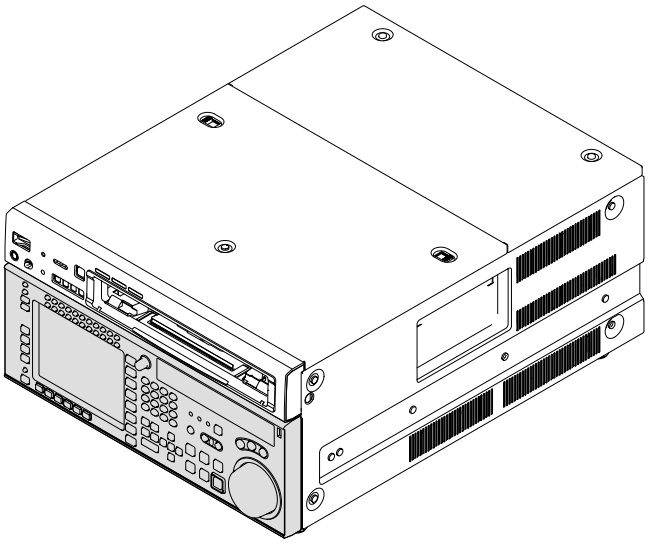

No.	Part No.	SP	Description
1201	A-1154-671-A	s	MOUNTED CIRCUIT BOARD, KY-526G
1202	A-1317-729-A	s	MOUNTED CIRCUIT BOARD, CP-393
1203	A-1442-869-A	s	LCD UNIT ASSY
1204	A-8325-080-G	s	DIAL ASSY
1205	A-8346-862-A	s	MOUNTED CIRCUIT BOARD, KY-527
1206	A-8347-050-A	s	MOUNTED CIRCUIT BOARD, CN-2511
1207	1-487-469-11	s	INVERTOR UNIT
1208	1-692-890-12	s	SWITCH, TACTILE
1209	1-692-890-22	s	SWITCH, TACTILE (WITH LIGHT)
1210	1-692-891-22	s	SWITCH, TACTILE (WITH LIGHT)
1211	1-692-892-22	s	SWITCH, TACTILE (WITH LIGHT)
1212	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
1213	1-786-604-11	s	SWITCH, TACTILE
1214	1-786-605-11	s	SWITCH, TACTILE
1215	1-805-436-21	s	INDICATOR MODULE, ORGANIC EL
1216	1-831-113-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
1217	1-831-159-11	s	CABLE, FLEXIBLE FLAT (22 CORE)
1218	1-965-382-11	s	HARNESS, SUB (FP-KY 20P V2)
1219	3-180-632-03	o	KNOB, DIAL
1220	3-180-633-04	s	RUBBER, DIAL KNOB (NBR)
1221	3-531-576-21	s	RIVET,NYLON
1222	3-729-076-21	s	SCREW (+B) (2X6)
1223	3-708-877-01	s	CAP
1224	3-792-025-03	s	KEY,TEN
1225	3-792-026-03	s	KEY,AUDIO
1226	3-792-027-03	s	KEY,FUNCTION A
1227	3-792-028-03	s	KEY,FUNCTION B
1228	3-792-029-04	s	FRAME,KEY PANEL
1229	3-806-630-01	s	SHEET,TEN KEY
1230	3-808-828-03	s	KNOB
1231	9-880-224-01	s	SPARE LUNP UNIT (2 PCS)
	7-621-759-35	s	SCREW +PSW 2.6X5(EP-FE/ZN/CM2)
	7-621-996-05	s	BOLT, HEXAGON SOCKET 2.6X5
	7-627-556-57	s	SCREW PRECISION +P 2.6X5 TYPE1
	7-682-547-04	s	SCREW +B3X6
	7-682-547-09	s	SCREW +B3X6(BLACK)
	7-682-947-01	s	SCREW +PSW 3X8
	7-685-102-19	s	SCREW +PTP2X4
	7-685-646-79	s	SCREW +BVTP 3X8
	7-685-902-01	s	SCREW +PTPWH 2.6X5(TYPE2)

Control Panel Block (S/N 12001 and Higher)

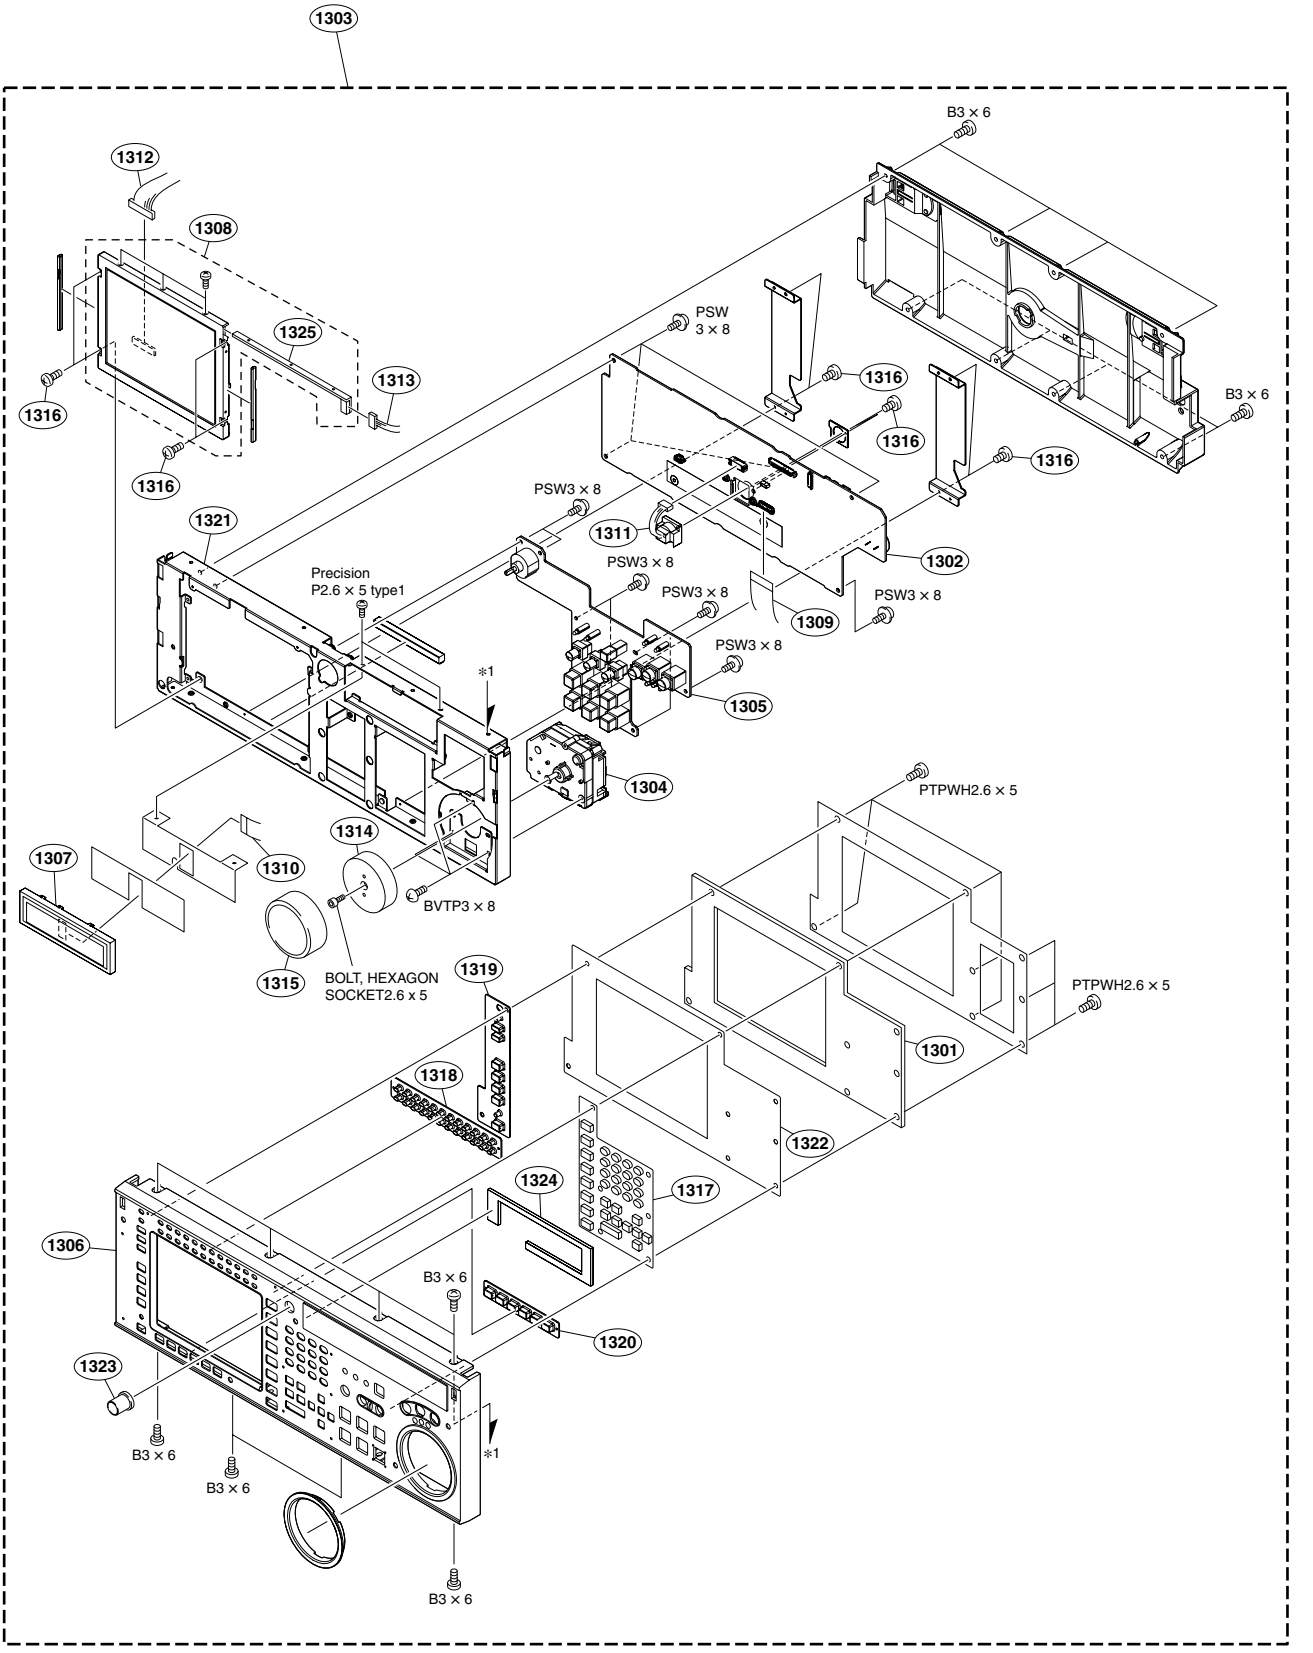

No.	Part No.	SP	Description
1301	A-1154-671-A	s	MOUNTED CIRCUIT BOARD, KY-526G
1302	A-1771-417-A	s	MOUNTED CIRCUIT BOARD, CP-405
1303	A-1786-582-A	s	PANEL ASSY, CONTROL
1304	A-8325-080-G	s	DIAL ASSY
1305	A-8346-862-A	s	MOUNTED CIRCUIT BOARD, KY-527
1306	X-2188-220-1	s	SUB ASSY,KEY PANEL
1307	1-805-436-21	s	INDICATOR MODULE, ORGANIC EL
1308	1-811-212-11	s	LCD MODULE (6.5 INCH)
1309	1-831-113-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
1310	1-831-159-11	s	CABLE, FLEXIBLE FLAT (22 CORE)
1311	1-965-382-11	s	HARNESS, SUB (FP-KY 20P V2)
1312	1-967-481-11	s	HARNESS, SUB (LCD VIDEO)
1313	1-967-482-11	s	HARNESS, SUB (LCD BACK LIGHT)
1314	3-180-632-03	s	KNOB, DIAL
1315	3-180-633-04	s	RUBBER, DIAL KNOB
1316	3-729-076-21	s	SCREW (+B) (2X6)
1317	3-792-025-03	s	KEY,TEN
1318	3-792-026-03	s	KEY,AUDIO
1319	3-792-027-03	s	KEY,FUNCTION A
1320	3-792-028-03	s	KEY,FUNCTION B
1321	3-792-029-05	s	FRAME,KEY PANEL
1322	3-806-630-01	s	SHEET,TEN KEY
1323	3-808-828-03	s	KNOB
1324	3-992-415-01	s	CUSHION(EL)
1325	9-885-147-77	s	LED UNIT, CHANGE
	7-621-996-05	s	BOLT, HEXAGON SOCKET 2.6X5
	7-627-556-57	s	PRECISION SCREW +P 2.6X5 TYPE1
	7-682-547-09	s	SCREW +B 3X6
	7-682-948-01	s	SCREW +PSW 3X8
	7-685-646-79	s	SCREW +BVTP 3X8 TYPE2 IT-3
	7-685-902-01	s	TAPPING +PWH 2.6X5 TYPE2 N-S

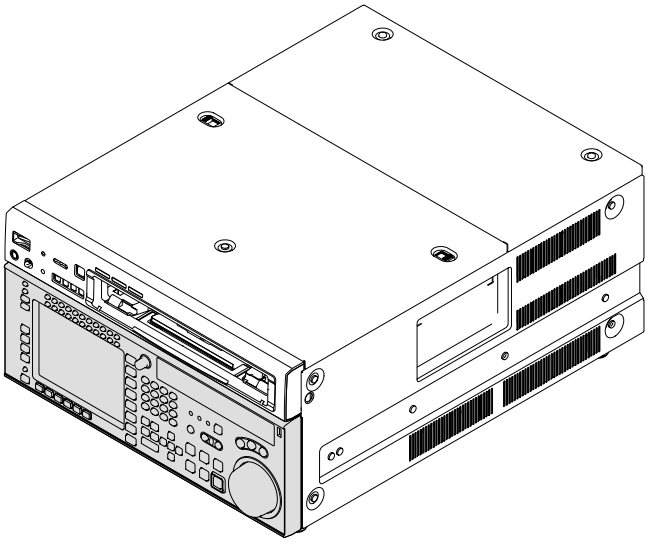

1-3. Electrical Parts List

Index

Board name		Page
AE-31H	SUFFIX: -22	1-33
	SUFFIX: -25	1-37
APR-81		1-41
APR-91		1-70
CCM-15		∗1
CL-29		1-101
CP-393		1-101
CP-397		1-109
CP-398		1-109
CP-399		1-110
CP-405		1-113
CUE-13		1-121
DIO-86		1-124
DLP-27 (HKSR-5803HQ)		∗1
DR-508		1-125
DT-47		1-133
DT-48		1-135
DVP-43 (HKSR-5802)		1-137
EQ-102		1-153
EQ-109		1-185
FC-91 (HKSR-5001)		∗2
FC-111 (HKSR-5001)		∗2
FL-350		1-217
FP-155		1-218
FP-163		1-219
HIF-46	SUFFIX: -11	1-221
	SUFFIX: -12	1-248
HIF-56	SUFFIX: -11	1-275
	SUFFIX: -12	1-302
HN-268		1-328
HP-135		1-329
HPR-22		1-330
HPR-35		1-341
IF-1071 (HKSR-5804)		1-358
KY-526G		1-358
KY-527		1-360
LED-455		1-361
LP-81		1-362
MB-1101		1-362
MY-115 (HKSR-5804)		1-363
PC-70		1-386
PTC-99		1-386
PTC-101		1-386
PTC-102		1-386
SE-606A		1-387
SS-102		1-387
SQ-20 (HKSR-5803SQ)		∗1
SWC-46		1-406
TC-104A		1-406
TC-112A		1-408
TR-119		1-409
TR-120		1-409
TX-96 (HKSR-5001)		∗2
TX-127 (HKSR-5001)		∗2

∗1: The electrical parts list of this board is not described in this manual.
∗2: The electrical parts list of this board is not described in this manual. Refer to SRW-5000/5500 Maintenance Manual.

AE-31H BOARD (SUFFIX 22)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8327-127-B	s	MOUNTED CIRCUIT BOARD, AE-31H
2pcs	3-701-832-02	o	HINGE, CIRCUIT BOARD
C100	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C101	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C102	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C103	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C104	1-127-951-21	s	CAP, CHIP FILM 0.015MF (3216)
C106	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C107	1-115-154-21	s	CAP, ELECT 10MF
C108	1-164-218-91	s	CAP,CERAMIC 180PF CH 1608
C109	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C110	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C111	1-115-414-91	s	CAP,CHIP CERAMIC 820PF CH 1608
C112	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C113	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C114	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C115	1-127-955-21	s	CAP, CHIP FILM 0.068MF (3225)
C116	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C117	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C118	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C119	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C120	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C121	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C122	1-164-686-91	s	CAP, CERAMIC 1500PF CH (2012)
C123	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C124	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C125	1-115-154-21	s	CAP, ELECT 10MF
C126	1-115-154-21	s	CAP, ELECT 10MF
C127	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C128	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C201	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C202	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C203	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C204	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C205	1-127-951-21	s	CAP, CHIP FILM 0.015MF (3216)
C207	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C208	1-115-154-21	s	CAP, ELECT 10MF
C209	1-164-218-91	s	CAP,CERAMIC 180PF CH 1608
C210	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C211	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C212	1-115-414-91	s	CAP,CHIP CERAMIC 820PF CH 1608
C213	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C214	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C215	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C216	1-127-955-21	s	CAP, CHIP FILM 0.068MF (3225)
C217	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C218	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C219	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C220	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C221	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C222	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C223	1-164-686-91	s	CAP, CERAMIC 1500PF CH (2012)
C224	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C225	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C226	1-115-154-21	s	CAP, ELECT 10MF
C227	1-115-154-21	s	CAP, ELECT 10MF
C228	1-115-154-21	s	CAP, ELECT 10MF
C300	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
C301	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C302	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C303	1-115-154-21	s	CAP, ELECT 10MF
C304	1-115-154-21	s	CAP, ELECT 10MF
C400	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C401	1-135-823-21	s	CAP, CHIP FILM 0.0033MF
C402	1-127-978-21	s	CAP, CHIP FILM 0.01MF (2012)
C403	1-135-823-21	s	CAP, CHIP FILM 0.0033MF
C404	1-127-957-21	s	CAP, CHIP FILM 0.0056MF (2012)
C405	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C406	1-127-953-21	s	CAP, CHIP FILM 0.033MF (3216)
C407	1-115-154-21	s	CAP, ELECT 10MF
C408	1-115-414-91	s	CAP,CHIP CERAMIC 820PF CH 1608
C409	1-109-899-91	s	CAP,CHIP CERAMIC 330PF CH 3216
C410	1-115-154-21	s	CAP, ELECT 10MF
C500	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C501	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C502	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C503	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C504	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C505	1-165-811-91	s	CAP, CHIP CERAMIC 22MF B 4532
C506	1-109-900-91	s	CAP,CHIP CERAMIC 470PF CH 3216
C507	1-109-899-91	s	CAP,CHIP CERAMIC 330PF CH 3216
C600	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C601	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C602	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C603	1-165-811-91	s	CAP, CHIP CERAMIC 22MF B 4532
C604	1-109-897-91	s	CAP, CERAMIC 15000PF CH (5750)
C605	1-109-898-91	s	CAP, CERAMIC 18000PF CH (5750)
C606	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C607	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C608	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C700	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C701	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C702	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C703	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C704	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C705	1-137-710-91	s	CAP, CERAMIC 10MF B (2012)
C706	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C707	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C708	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C709	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C800	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C801	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C804	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C805	1-164-390-91	s	CAP, CERAMIC 330PF CH 1608
C852	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C853	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C855	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C856	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C860	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C863	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C864	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C865	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C870	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C871	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C872	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C873	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
CN100	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN200	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN600	1-573-768-21	s	PIN, CONNECTOR (1.5MM) (SMD)5P
CN800	1-580-547-11	o	PIN, CONNECTOR (PC BOARD) 36P
D400	8-719-820-42	s	DIODE 1SS302-TE85L
D500	8-719-036-74	s	DIODE RD3.3SB-T1
D501	8-719-941-84	s	DIODE DA204UT106
D800	8-719-024-83	s	DIODE 1SS301-TE85L
D801	8-719-024-83	s	DIODE 1SS301-TE85L
D802	8-719-024-83	s	DIODE 1SS301-TE85L
D850	8-719-975-41	s	DIODE RB411D-T146
D851	8-719-975-41	s	DIODE RB411D-T146
E100	1-535-877-22	s	CHIP, CHECKER
E500	1-535-877-22	s	CHIP, CHECKER
E600	1-535-877-22	s	CHIP, CHECKER
IC100	8-759-394-74	s	IC NJM4580E-D-TE2
IC102	8-759-394-74	s	IC NJM4580E-D-TE2
IC103	8-759-394-74	s	IC NJM4580E-D-TE2
IC104	8-759-394-74	s	IC NJM4580E-D-TE2
IC105	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC106	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC200	8-759-394-74	s	IC NJM4580E-D-TE2
IC201	8-759-394-74	s	IC NJM4580E-D-TE2
IC202	8-759-394-74	s	IC NJM4580E-D-TE2
IC203	8-759-394-74	s	IC NJM4580E-D-TE2
IC300	8-759-394-74	s	IC NJM4580E-D-TE2
IC301	8-759-394-74	s	IC NJM4580E-D-TE2
IC400	8-759-394-74	s	IC NJM4580E-D-TE2
IC401	8-759-394-74	s	IC NJM4580E-D-TE2
IC500	8-759-144-72	s	IC UPC358G2-E2
IC600	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC700	8-759-394-74	s	IC NJM4580E-D-TE2
IC701	8-759-394-74	s	IC NJM4580E-D-TE2
IC702	8-759-394-74	s	IC NJM4580E-D-TE2
IC854	8-759-642-22	s	IC UPC29M05T-E2
IC855	8-759-539-89	s	IC LM2990SX-5.0
IC857	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC858	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC859	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC860	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC861	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC862	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC863	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
L500	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L600	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L850	1-416-919-21	s	COIL, CHOKE 150UH
L851	1-416-919-21	s	COIL, CHOKE 150UH
LV400	1-410-853-21	s	COIL, VARIABLE
LV600	1-414-007-11	s	COIL, VARIABLE
PS850	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
PS851	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
PS852	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
Q100	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q101	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q102	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q103	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q104	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
Q105	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q200	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q201	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q202	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q203	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q204	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q205	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q206	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q207	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q208	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q400	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q401	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q402	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q403	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q404	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q405	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q503	8-729-111-58	s	TRANSISTOR 2SB1114-T1ZL
Q504	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q505	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q506	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q507	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q600	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q602	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q603	6-551-258-01	s	TRANSISTOR SI4435BDY-T1
Q605	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q606	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q607	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q700	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q701	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q800	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q801	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q802	8-729-112-85	s	TRANSISTOR 2SA1330-T1O6
Q803	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q804	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q805	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q806	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q850	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q851	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R100	1-218-871-91	s	RES, CHIP 10K (1608)
R101	1-218-871-91	s	RES, CHIP 10K (1608)
R102	1-211-991-91	s	RES, CHIP 82 (1608)
R103	1-218-871-91	s	RES, CHIP 10K (1608)
R104	1-218-899-91	s	RES, CHIP 150K (1608)
R105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R106	1-218-851-91	s	RES, CHIP 1.5K (1608)
R107	1-218-907-91	s	RES, CHIP 330K (1608)
R108	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R109	1-218-855-91	s	RES, CHIP 2.2K (1608)
R110	1-218-869-91	s	RES, CHIP 8.2K (1608)
R111	1-218-863-91	s	RES, CHIP 4.7K (1608)
R112	1-218-863-91	s	RES, CHIP 4.7K (1608)
R113	1-218-863-91	s	RES, CHIP 4.7K (1608)
R114	1-218-871-91	s	RES, CHIP 10K (1608)
R115	1-218-863-91	s	RES, CHIP 4.7K (1608)
R116	1-218-871-91	s	RES, CHIP 10K (1608)
R117	1-218-855-91	s	RES, CHIP 2.2K (1608)
R118	1-218-869-91	s	RES, CHIP 8.2K (1608)

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
R119	1-218-887-91	s	RES, CHIP 47K (1608)
R120	1-218-871-91	s	RES, CHIP 10K (1608)
R121	1-218-895-91	s	RES, CHIP 100K (1608)
R122	1-218-907-91	s	RES, CHIP 330K (1608)
R123	1-218-881-91	s	RES, CHIP 27K (1608)
R124	1-218-887-91	s	RES, CHIP 47K (1608)
R125	1-218-879-91	s	RES, CHIP 22K (1608)
R127	1-218-871-91	s	RES, CHIP 10K (1608)
R128	1-218-855-91	s	RES, CHIP 2.2K (1608)
R129	1-218-879-91	s	RES, CHIP 22K (1608)
R130	1-218-871-91	s	RES, CHIP 10K (1608)
R131	1-218-855-91	s	RES, CHIP 2.2K (1608)
R132	1-218-871-91	s	RES, CHIP 10K (1608)
R133	1-218-871-91	s	RES, CHIP 10K (1608)
R134	1-218-847-91	s	RES, CHIP 1.0K (1608)
R135	1-218-871-91	s	RES, CHIP 10K (1608)
R136	1-218-879-91	s	RES, CHIP 22K (1608)
R137	1-218-879-91	s	RES, CHIP 22K (1608)
R140	1-218-907-91	s	RES, CHIP 330K (1608)
R141	1-218-847-91	s	RES, CHIP 1.0K (1608)
R200	1-218-871-91	s	RES, CHIP 10K (1608)
R201	1-211-969-91	s	RES, CHIP 10 (1608)
R202	1-218-847-91	s	RES, CHIP 1.0K (1608)
R203	1-218-871-91	s	RES, CHIP 10K (1608)
R205	1-218-871-91	s	RES, CHIP 10K (1608)
R210	1-218-871-91	s	RES, CHIP 10K (1608)
R212	1-211-991-91	s	RES, CHIP 82 (1608)
R215	1-218-871-91	s	RES, CHIP 10K (1608)
R216	1-218-899-91	s	RES, CHIP 150K (1608)
R218	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R220	1-218-851-91	s	RES, CHIP 1.5K (1608)
R221	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R222	1-218-907-91	s	RES, CHIP 330K (1608)
R223	1-218-907-91	s	RES, CHIP 330K (1608)
R224	1-218-907-91	s	RES, CHIP 330K (1608)
R225	1-218-855-91	s	RES, CHIP 2.2K (1608)
R226	1-218-869-91	s	RES, CHIP 8.2K (1608)
R227	1-218-863-91	s	RES, CHIP 4.7K (1608)
R228	1-218-863-91	s	RES, CHIP 4.7K (1608)
R229	1-218-863-91	s	RES, CHIP 4.7K (1608)
R230	1-218-871-91	s	RES, CHIP 10K (1608)
R231	1-218-863-91	s	RES, CHIP 4.7K (1608)
R232	1-218-871-91	s	RES, CHIP 10K (1608)
R233	1-218-855-91	s	RES, CHIP 2.2K (1608)
R234	1-218-869-91	s	RES, CHIP 8.2K (1608)
R235	1-218-887-91	s	RES, CHIP 47K (1608)
R236	1-218-871-91	s	RES, CHIP 10K (1608)
R237	1-218-899-91	s	RES, CHIP 150K (1608)
R238	1-218-899-91	s	RES, CHIP 150K (1608)
R239	1-218-895-91	s	RES, CHIP 100K (1608)
R240	1-218-895-91	s	RES, CHIP 100K (1608)
R241	1-218-879-91	s	RES, CHIP 22K (1608)
R242	1-218-871-91	s	RES, CHIP 10K (1608)
R243	1-218-871-91	s	RES, CHIP 10K (1608)
R244	1-218-871-91	s	RES, CHIP 10K (1608)
R245	1-218-879-91	s	RES, CHIP 22K (1608)
R246	1-218-871-91	s	RES, CHIP 10K (1608)
R247	1-218-871-91	s	RES, CHIP 10K (1608)
R248	1-218-871-91	s	RES, CHIP 10K (1608)

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
R249	1-218-847-91	s	RES, CHIP 1.0K (1608)
R250	1-218-871-91	s	RES, CHIP 10K (1608)
R251	1-218-879-91	s	RES, CHIP 22K (1608)
R252	1-218-879-91	s	RES, CHIP 22K (1608)
R300	1-218-855-91	s	RES, CHIP 2.2K (1608)
R301	1-218-869-91	s	RES, CHIP 8.2K (1608)
R302	1-218-871-91	s	RES, CHIP 10K (1608)
R303	1-218-847-91	s	RES, CHIP 1.0K (1608)
R304	1-218-871-91	s	RES, CHIP 10K (1608)
R305	1-218-879-91	s	RES, CHIP 22K (1608)
R306	1-218-879-91	s	RES, CHIP 22K (1608)
R309	1-218-847-91	s	RES, CHIP 1.0K (1608)
R400	1-218-871-91	s	RES, CHIP 10K (1608)
R401	1-218-871-91	s	RES, CHIP 10K (1608)
R402	1-218-863-91	s	RES, CHIP 4.7K (1608)
R403	1-218-863-91	s	RES, CHIP 4.7K (1608)
R404	1-218-871-91	s	RES, CHIP 10K (1608)
R405	1-218-871-91	s	RES, CHIP 10K (1608)
R406	1-218-839-91	s	RES, CHIP 470 (1608)
R407	1-218-871-91	s	RES, CHIP 10K (1608)
R408	1-218-865-91	s	RES, CHIP 5.6K (1608)
R409	1-218-893-91	s	RES, CHIP 82K (1608)
R410	1-218-859-91	s	RES, CHIP 3.3K (1608)
R411	1-218-835-91	s	RES, CHIP 330 (1608)
R412	1-218-895-91	s	RES, CHIP 100K (1608)
R413	1-218-845-91	s	RES, CHIP 820 (1608)
R414	1-218-845-91	s	RES, CHIP 820 (1608)
R415	1-218-895-91	s	RES, CHIP 100K (1608)
R416	1-218-863-91	s	RES, CHIP 4.7K (1608)
R417	1-218-845-91	s	RES, CHIP 820 (1608)
R418	1-218-845-91	s	RES, CHIP 820 (1608)
R420	1-218-871-91	s	RES, CHIP 10K (1608)
R421	1-218-871-91	s	RES, CHIP 10K (1608)
R500	1-218-861-91	s	RES, CHIP 3.9K (1608)
R501	1-218-863-91	s	RES, CHIP 4.7K (1608)
R502	1-218-871-91	s	RES, CHIP 10K (1608)
R503	1-218-879-91	s	RES, CHIP 22K (1608)
R504	1-218-847-91	s	RES, CHIP 1.0K (1608)
R505	1-218-879-91	s	RES, CHIP 22K (1608)
R506	1-218-847-91	s	RES, CHIP 1.0K (1608)
R507	1-218-871-91	s	RES, CHIP 10K (1608)
R508	1-218-871-91	s	RES, CHIP 10K (1608)
R509	1-218-887-91	s	RES, CHIP 47K (1608)
R510	1-218-887-91	s	RES, CHIP 47K (1608)
R511	1-216-789-91	s	RES, CHIP 2.2 (1608)
R512	1-216-789-91	s	RES, CHIP 2.2 (1608)
R513	1-218-887-91	s	RES, CHIP 47K (1608)
R514	1-218-863-91	s	RES, CHIP 4.7K (1608)
R515	1-218-863-91	s	RES, CHIP 4.7K (1608)
R601	1-218-891-91	s	RES, CHIP 68K (1608)
R602	1-218-885-91	s	RES, CHIP 39K (1608)
R604	1-218-879-91	s	RES, CHIP 22K (1608)
R605	1-218-879-91	s	RES, CHIP 22K (1608)
R606	1-216-789-91	s	RES, CHIP 2.2 (1608)
R607	1-216-789-91	s	RES, CHIP 2.2 (1608)
R608	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R609	1-218-887-91	s	RES, CHIP 47K (1608)
R610	1-218-887-91	s	RES, CHIP 47K (1608)
R700	1-218-871-91	s	RES, CHIP 10K (1608)

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
R701	1-218-871-91	s	RES, CHIP 10K (1608)
R702	1-218-863-91	s	RES, CHIP 4.7K (1608)
R703	1-218-863-91	s	RES, CHIP 4.7K (1608)
R704	1-218-907-91	s	RES, CHIP 330K (1608)
R705	1-218-907-91	s	RES, CHIP 330K (1608)
R706	1-211-969-91	s	RES, CHIP 10 (1608)
R707	1-211-969-91	s	RES, CHIP 10 (1608)
R708	1-218-887-91	s	RES, CHIP 47K (1608)
R709	1-218-887-91	s	RES, CHIP 47K (1608)
R710	1-218-863-91	s	RES, CHIP 4.7K (1608)
R711	1-218-863-91	s	RES, CHIP 4.7K (1608)
R712	1-218-871-91	s	RES, CHIP 10K (1608)
R713	1-218-871-91	s	RES, CHIP 10K (1608)
R714	1-218-907-91	s	RES, CHIP 330K (1608)
R715	1-218-907-91	s	RES, CHIP 330K (1608)
R716	1-218-871-91	s	RES, CHIP 10K (1608)
R717	1-218-871-91	s	RES, CHIP 10K (1608)
R800	1-218-895-91	s	RES, CHIP 100K (1608)
R801	1-218-887-91	s	RES, CHIP 47K (1608)
R803	1-218-879-91	s	RES, CHIP 22K (1608)
R804	1-218-887-91	s	RES, CHIP 47K (1608)
R805	1-218-887-91	s	RES, CHIP 47K (1608)
R806	1-218-887-91	s	RES, CHIP 47K (1608)
R808	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R853	1-218-887-91	s	RES, CHIP 47K (1608)
R857	1-218-863-91	s	RES, CHIP 4.7K (1608)
R858	1-218-863-91	s	RES, CHIP 4.7K (1608)
R859	1-218-887-91	s	RES, CHIP 47K (1608)
R861	1-216-864-91	s	CONDUCTOR, CHIP (1608)
RV100	1-225-796-21	s	RES, ADJ, CERMET 100K
RV101	1-225-791-21	s	RES, ADJ, CERMET 5K
RV102	1-225-789-21	s	RES, ADJ, CERMET 2K
RV103	1-225-793-21	s	RES, ADJ, CERMET 20K
RV200	1-225-796-21	s	RES, ADJ, CERMET 100K
RV201	1-225-791-21	s	RES, ADJ, CERMET 5K
RV202	1-225-789-21	s	RES, ADJ, CERMET 2K
RV203	1-225-791-21	s	RES, ADJ, CERMET 5K
RV204	1-225-793-21	s	RES, ADJ, CERMET 20K
RV205	1-225-791-21	s	RES, ADJ, CERMET 5K
RV300	1-225-793-21	s	RES, ADJ, CERMET 20K
RV400	1-225-789-21	s	RES, ADJ, CERMET 2K
RV401	1-225-793-21	s	RES, ADJ, CERMET 20K
RV500	1-225-791-21	s	RES, ADJ, CERMET 5K
RV700	1-225-792-21	s	RES, ADJ, CERMET 10K
RV701	1-225-792-21	s	RES, ADJ, CERMET 10K
RV702	1-225-788-21	s	RES, ADJ, CERMET 1K
RV703	1-225-788-21	s	RES, ADJ, CERMET 1K
S100	1-692-881-41	s	SWITCH, SLIDE
S200	1-692-881-41	s	SWITCH, SLIDE
T500	1-433-326-11	s	TRANSFORMER, BIAS OSCILLATION
T600	1-424-511-11	s	TRANSFORMER, FE
TP100	1-535-877-22	s	CHIP, CHECKER
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP300	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER

(AE-31H BOARD (SUFFIX 22))

Ref. No. or Q'ty	Part No.	SP	Description
TP401	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER

AE-31H BOARD (SUFFIX 25)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8327-127-B	s	MOUNTED CIRCUIT BOARD, AE-31H
2pcs	3-701-832-02	o	HINGE, CIRCUIT BOARD
C100	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C101	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C102	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C103	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C104	1-127-951-21	s	CAP, CHIP FILM 0.015MF (3216)
C106	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C107	1-115-154-21	s	CAP, ELECT 10MF
C108	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C109	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C110	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C112	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C113	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C114	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C115	1-127-955-21	s	CAP, CHIP FILM 0.068MF (3225)
C116	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C117	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C118	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C119	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C120	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C121	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C122	1-164-686-91	s	CAP, CERAMIC 1500PF CH (2012)
C123	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C124	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C125	1-115-154-21	s	CAP, ELECT 10MF
C126	1-115-154-21	s	CAP, ELECT 10MF
C128	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C129	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C130	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C201	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C202	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C203	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C204	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C205	1-127-951-21	s	CAP, CHIP FILM 0.015MF (3216)
C207	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C208	1-115-154-21	s	CAP, ELECT 10MF
C209	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C210	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C211	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C213	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C214	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C215	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C216	1-127-955-21	s	CAP, CHIP FILM 0.068MF (3225)
C217	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C218	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C219	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C220	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C221	1-127-952-21	s	CAP, CHIP FILM 0.022MF (3216)
C222	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C223	1-164-686-91	s	CAP, CERAMIC 1500PF CH (2012)
C224	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C225	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C226	1-115-154-21	s	CAP, ELECT 10MF
C227	1-115-154-21	s	CAP, ELECT 10MF
C228	1-115-154-21	s	CAP, ELECT 10MF
C229	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C230	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
C300	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C301	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C302	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C303	1-115-154-21	s	CAP, ELECT 10MF
C304	1-115-154-21	s	CAP, ELECT 10MF
C305	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C306	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C400	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C401	1-135-823-21	s	CAP, CHIP FILM 0.0033MF
C402	1-127-978-21	s	CAP, CHIP FILM 0.01MF (2012)
C403	1-135-823-21	s	CAP, CHIP FILM 0.0033MF
C404	1-127-957-21	s	CAP, CHIP FILM 0.0056MF (2012)
C405	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C406	1-127-953-21	s	CAP, CHIP FILM 0.033MF (3216)
C407	1-115-154-21	s	CAP, ELECT 10MF
C408	1-115-414-91	s	CAP,CHIP CERAMIC 820PF CH 1608
C409	1-109-899-91	s	CAP,CHIP CERAMIC 330PF CH 3216
C410	1-115-154-21	s	CAP, ELECT 10MF
C411	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C412	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C501	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C502	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C503	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C504	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C505	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C506	1-109-900-91	s	CAP,CHIP CERAMIC 470PF CH 3216
C507	1-109-899-91	s	CAP,CHIP CERAMIC 330PF CH 3216
C508	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C509	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C601	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C602	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C603	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C604	1-109-897-91	s	CAP, CERAMIC 15000PF CH (5750)
C605	1-109-898-91	s	CAP, CERAMIC 18000PF CH (5750)
C606	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C607	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C608	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C609	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C610	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C611	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C700	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C702	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C703	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C704	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C705	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C706	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C707	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C710	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C711	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C800	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C801	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C804	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C805	1-164-390-91	s	CAP, CERAMIC 330PF CH 1608
C852	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C853	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C855	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C856	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C863	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C864	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
C870	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C871	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C872	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C873	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C877	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
CN100	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN200	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN600	1-573-768-21	s	PIN, CONNECTOR (1.5MM) (SMD)5P
CN800	1-580-547-11	o	PIN, CONNECTOR (PC BOARD) 36P
D400	8-719-024-71	s	DIODE 1SS362-TE85L
D500	8-719-036-74	s	DIODE RD3.3SB-T1
D501	8-719-024-69	s	DIODE 1SS361-TE85L
D502	8-719-070-20	s	DIODE RB706F-40
D601	8-719-070-20	s	DIODE RB706F-40
D602	8-719-024-69	s	DIODE 1SS361-TE85L
D603	8-719-036-74	s	DIODE RD3.3SB-T1
D800	8-719-024-69	s	DIODE 1SS361-TE85L
D801	8-719-024-69	s	DIODE 1SS361-TE85L
D802	8-719-024-69	s	DIODE 1SS361-TE85L
D850	8-719-975-41	s	DIODE RB411D-T146
D851	8-719-975-41	s	DIODE RB411D-T146
D852	8-719-056-48	s	DIODE 1SS388(TPL3)
E100	1-535-877-22	s	CHIP, CHECKER
E500	1-535-877-22	s	CHIP, CHECKER
E600	1-535-877-22	s	CHIP, CHECKER
IC100	8-759-394-74	s	IC NJM4580E-D-TE2
IC102	8-759-394-74	s	IC NJM4580E-D-TE2
IC103	8-759-394-74	s	IC NJM4580E-D-TE2
IC104	8-759-394-74	s	IC NJM4580E-D-TE2
IC105	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC106	6-706-481-01	s	IC TC7SET32FU(T5RSOJF)
IC200	8-759-394-74	s	IC NJM4580E-D-TE2
IC201	8-759-394-74	s	IC NJM4580E-D-TE2
IC202	8-759-394-74	s	IC NJM4580E-D-TE2
IC203	8-759-394-74	s	IC NJM4580E-D-TE2
IC300	8-759-394-74	s	IC NJM4580E-D-TE2
IC301	8-759-394-74	s	IC NJM4580E-D-TE2
IC400	8-759-394-74	s	IC NJM4580E-D-TE2
IC401	8-759-394-74	s	IC NJM4580E-D-TE2
IC402	8-759-287-55	s	IC TC7S66FU(TE85R)
IC500	8-759-144-72	s	IC UPC358G2-E2
IC501	6-703-109-01	o	IC NJM2730F(TE1)
IC601	6-703-109-01	o	IC NJM2730F(TE1)
IC602	8-759-144-72	s	IC UPC358G2-E2
IC700	8-759-394-74	s	IC NJM4580E-D-TE2
IC701	8-759-394-74	s	IC NJM4580E-D-TE2
IC702	8-759-394-74	s	IC NJM4580E-D-TE2
IC854	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC855	6-704-155-01	s	IC UCC384DPTR-5
IC858	6-706-475-01	s	IC TC7SET02FU(T5RSOJF)
IC859	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC861	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC862	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC863	6-704-490-01	s	IC S-80915CNNB-G8KT2G
L500	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L600	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L850	1-416-919-21	s	COIL, CHOKE 150UH
L851	1-416-919-21	s	COIL, CHOKE 150UH

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
LV400	1-457-466-11	s	COIL, VARIABLE
LV600	1-457-467-11	s	COIL, VARIABLE
PS850	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
PS851	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
PS852	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
Q100	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q101	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q102	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q103	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q104	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q200	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q201	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q202	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q203	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q204	8-729-202-23	s	TRANSISTOR 2SK209G-TE85L
Q205	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q206	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q207	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q208	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q400	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q401	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q402	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q403	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q404	8-729-112-91	s	TRANSISTOR 2SC3360-T1N16
Q405	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q501	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q502	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q503	8-729-111-58	s	TRANSISTOR 2SB1114-T1ZL
Q504	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q505	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q506	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q600	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q601	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q602	8-729-111-58	s	TRANSISTOR 2SB1114-T1ZL
Q605	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q606	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q607	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q700	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q701	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q800	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q801	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q802	8-729-112-85	s	TRANSISTOR 2SA1330-T1O6
Q803	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q804	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q805	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q857	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q858	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q859	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q860	8-729-928-37	s	TRANSISTOR DTA114EE-TL
R100	1-218-871-91	s	RES, CHIP 10K (1608)
R101	1-218-871-91	s	RES, CHIP 10K (1608)
R102	1-211-991-91	s	RES, CHIP 82 (1608)
R103	1-218-871-91	s	RES, CHIP 10K (1608)
R104	1-218-899-91	s	RES, CHIP 150K (1608)
R105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R106	1-218-851-91	s	RES, CHIP 1.5K (1608)
R107	1-218-907-91	s	RES, CHIP 330K (1608)
R109	1-218-855-91	s	RES, CHIP 2.2K (1608)

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
R110	1-218-869-91	s	RES, CHIP 8.2K (1608)
R111	1-218-863-91	s	RES, CHIP 4.7K (1608)
R112	1-218-863-91	s	RES, CHIP 4.7K (1608)
R113	1-218-863-91	s	RES, CHIP 4.7K (1608)
R114	1-218-871-91	s	RES, CHIP 10K (1608)
R115	1-218-863-91	s	RES, CHIP 4.7K (1608)
R116	1-218-871-91	s	RES, CHIP 10K (1608)
R117	1-218-855-91	s	RES, CHIP 2.2K (1608)
R118	1-218-869-91	s	RES, CHIP 8.2K (1608)
R119	1-218-887-91	s	RES, CHIP 47K (1608)
R120	1-218-871-91	s	RES, CHIP 10K (1608)
R121	1-218-895-91	s	RES, CHIP 100K (1608)
R122	1-218-907-91	s	RES, CHIP 330K (1608)
R123	1-218-881-91	s	RES, CHIP 27K (1608)
R124	1-218-887-91	s	RES, CHIP 47K (1608)
R125	1-218-879-91	s	RES, CHIP 22K (1608)
R127	1-218-871-91	s	RES, CHIP 10K (1608)
R128	1-218-855-91	s	RES, CHIP 2.2K (1608)
R129	1-218-879-91	s	RES, CHIP 22K (1608)
R130	1-218-871-91	s	RES, CHIP 10K (1608)
R131	1-218-855-91	s	RES, CHIP 2.2K (1608)
R132	1-218-871-91	s	RES, CHIP 10K (1608)
R133	1-218-871-91	s	RES, CHIP 10K (1608)
R134	1-218-847-91	s	RES, CHIP 1.0K (1608)
R135	1-218-871-91	s	RES, CHIP 10K (1608)
R136	1-218-879-91	s	RES, CHIP 22K (1608)
R137	1-218-879-91	s	RES, CHIP 22K (1608)
R138	1-218-871-91	s	RES, CHIP 10K (1608)
R141	1-218-847-91	s	RES, CHIP 1.0K (1608)
R200	1-218-871-91	s	RES, CHIP 10K (1608)
R201	1-211-969-91	s	RES, CHIP 10 (1608)
R202	1-218-847-91	s	RES, CHIP 1.0K (1608)
R203	1-218-871-91	s	RES, CHIP 10K (1608)
R205	1-218-871-91	s	RES, CHIP 10K (1608)
R210	1-218-871-91	s	RES, CHIP 10K (1608)
R212	1-211-991-91	s	RES, CHIP 82 (1608)
R215	1-218-871-91	s	RES, CHIP 10K (1608)
R216	1-218-899-91	s	RES, CHIP 150K (1608)
R218	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R220	1-218-851-91	s	RES, CHIP 1.5K (1608)
R221	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R222	1-218-907-91	s	RES, CHIP 330K (1608)
R223	1-218-907-91	s	RES, CHIP 330K (1608)
R224	1-218-907-91	s	RES, CHIP 330K (1608)
R225	1-218-855-91	s	RES, CHIP 2.2K (1608)
R226	1-218-869-91	s	RES, CHIP 8.2K (1608)
R227	1-218-863-91	s	RES, CHIP 4.7K (1608)
R228	1-218-863-91	s	RES, CHIP 4.7K (1608)
R229	1-218-863-91	s	RES, CHIP 4.7K (1608)
R230	1-218-871-91	s	RES, CHIP 10K (1608)
R231	1-218-863-91	s	RES, CHIP 4.7K (1608)
R232	1-218-871-91	s	RES, CHIP 10K (1608)
R233	1-218-855-91	s	RES, CHIP 2.2K (1608)
R234	1-218-869-91	s	RES, CHIP 8.2K (1608)
R235	1-218-887-91	s	RES, CHIP 47K (1608)
R236	1-218-871-91	s	RES, CHIP 10K (1608)
R237	1-218-899-91	s	RES, CHIP 150K (1608)
R238	1-218-899-91	s	RES, CHIP 150K (1608)
R239	1-218-895-91	s	RES, CHIP 100K (1608)

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
R240	1-218-895-91	s	RES, CHIP 100K (1608)
R241	1-218-879-91	s	RES, CHIP 22K (1608)
R242	1-218-871-91	s	RES, CHIP 10K (1608)
R243	1-218-871-91	s	RES, CHIP 10K (1608)
R244	1-218-871-91	s	RES, CHIP 10K (1608)
R245	1-218-879-91	s	RES, CHIP 22K (1608)
R246	1-218-871-91	s	RES, CHIP 10K (1608)
R247	1-218-871-91	s	RES, CHIP 10K (1608)
R248	1-218-871-91	s	RES, CHIP 10K (1608)
R249	1-218-847-91	s	RES, CHIP 1.0K (1608)
R250	1-218-871-91	s	RES, CHIP 10K (1608)
R251	1-218-879-91	s	RES, CHIP 22K (1608)
R252	1-218-879-91	s	RES, CHIP 22K (1608)
R300	1-218-855-91	s	RES, CHIP 2.2K (1608)
R301	1-218-869-91	s	RES, CHIP 8.2K (1608)
R302	1-218-871-91	s	RES, CHIP 10K (1608)
R303	1-218-847-91	s	RES, CHIP 1.0K (1608)
R304	1-218-871-91	s	RES, CHIP 10K (1608)
R305	1-218-879-91	s	RES, CHIP 22K (1608)
R306	1-218-879-91	s	RES, CHIP 22K (1608)
R309	1-218-847-91	s	RES, CHIP 1.0K (1608)
R400	1-218-871-91	s	RES, CHIP 10K (1608)
R401	1-218-871-91	s	RES, CHIP 10K (1608)
R402	1-218-857-91	s	RES, CHIP 2.7K (1608)
R403	1-218-857-91	s	RES, CHIP 2.7K (1608)
R404	1-218-873-91	s	RES, CHIP 12K (1608)
R405	1-218-871-91	s	RES, CHIP 10K (1608)
R406	1-218-849-91	s	RES, CHIP 1.2K (1608)
R407	1-218-871-91	s	RES, CHIP 10K (1608)
R408	1-218-865-91	s	RES, CHIP 5.6K (1608)
R409	1-218-893-91	s	RES, CHIP 82K (1608)
R410	1-218-859-91	s	RES, CHIP 3.3K (1608)
R411	1-218-835-91	s	RES, CHIP 330 (1608)
R412	1-218-895-91	s	RES, CHIP 100K (1608)
R413	1-218-845-91	s	RES, CHIP 820 (1608)
R414	1-218-845-91	s	RES, CHIP 820 (1608)
R415	1-218-895-91	s	RES, CHIP 100K (1608)
R416	1-218-863-91	s	RES, CHIP 4.7K (1608)
R417	1-218-845-91	s	RES, CHIP 820 (1608)
R418	1-218-845-91	s	RES, CHIP 820 (1608)
R420	1-218-871-91	s	RES, CHIP 10K (1608)
R421	1-218-871-91	s	RES, CHIP 10K (1608)
R423	1-218-871-91	s	RES, CHIP 10K (1608)
R501	1-218-871-91	s	RES, CHIP 10K (1608)
R502	1-218-871-91	s	RES, CHIP 10K (1608)
R503	1-218-899-91	s	RES, CHIP 150K (1608)
R504	1-218-871-91	s	RES, CHIP 10K (1608)
R505	1-218-887-91	s	RES, CHIP 47K (1608)
R506	1-218-847-91	s	RES, CHIP 1.0K (1608)
R507	1-218-871-91	s	RES, CHIP 10K (1608)
R508	1-218-871-91	s	RES, CHIP 10K (1608)
R509	1-218-887-91	s	RES, CHIP 47K (1608)
R510	1-218-887-91	s	RES, CHIP 47K (1608)
R511	1-216-789-91	s	RES, CHIP 2.2 (1608)
R512	1-216-789-91	s	RES, CHIP 2.2 (1608)
R513	1-218-887-91	s	RES, CHIP 47K (1608)
R514	1-220-397-91	s	RES, CHIP 4.7M (1608)
R515	1-218-851-91	s	RES, CHIP 1.5K (1608)
R516	1-218-853-91	s	RES, CHIP 1.8K (1608)

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
R601	1-218-879-91	s	RES, CHIP 22K (1608)
R602	1-218-899-91	s	RES, CHIP 150K (1608)
R603	1-218-851-91	s	RES, CHIP 1.5K (1608)
R604	1-218-879-91	s	RES, CHIP 22K (1608)
R605	1-218-879-91	s	RES, CHIP 22K (1608)
R606	1-216-789-91	s	RES, CHIP 2.2 (1608)
R607	1-216-789-91	s	RES, CHIP 2.2 (1608)
R608	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R609	1-218-887-91	s	RES, CHIP 47K (1608)
R611	1-218-847-91	s	RES, CHIP 1.0K (1608)
R612	1-218-871-91	s	RES, CHIP 10K (1608)
R613	1-218-887-91	s	RES, CHIP 47K (1608)
R614	1-218-847-91	s	RES, CHIP 1.0K (1608)
R615	1-218-871-91	s	RES, CHIP 10K (1608)
R616	1-218-871-91	s	RES, CHIP 10K (1608)
R617	1-220-397-91	s	RES, CHIP 4.7M (1608)
R700	1-218-895-91	s	RES, CHIP 100K (1608)
R701	1-218-895-91	s	RES, CHIP 100K (1608)
R702	1-218-843-91	s	RES, CHIP 680 (1608)
R703	1-218-843-91	s	RES, CHIP 680 (1608)
R706	1-211-969-91	s	RES, CHIP 10 (1608)
R707	1-211-969-91	s	RES, CHIP 10 (1608)
R708	1-218-883-91	s	RES, CHIP 33K (1608)
R709	1-218-883-91	s	RES, CHIP 33K (1608)
R710	1-218-863-91	s	RES, CHIP 4.7K (1608)
R711	1-218-863-91	s	RES, CHIP 4.7K (1608)
R712	1-218-871-91	s	RES, CHIP 10K (1608)
R713	1-218-871-91	s	RES, CHIP 10K (1608)
R716	1-218-871-91	s	RES, CHIP 10K (1608)
R717	1-218-871-91	s	RES, CHIP 10K (1608)
R800	1-218-895-91	s	RES, CHIP 100K (1608)
R801	1-218-887-91	s	RES, CHIP 47K (1608)
R803	1-218-879-91	s	RES, CHIP 22K (1608)
R804	1-218-887-91	s	RES, CHIP 47K (1608)
R805	1-218-887-91	s	RES, CHIP 47K (1608)
R806	1-218-887-91	s	RES, CHIP 47K (1608)
R859	1-218-887-91	s	RES, CHIP 47K (1608)
R860	1-218-887-91	s	RES, CHIP 47K (1608)
R864	1-218-855-91	s	RES, CHIP 2.2K (1608)
R865	1-218-887-91	s	RES, CHIP 47K (1608)
R866	1-218-881-91	s	RES, CHIP 27K (1608)
R867	1-218-895-91	s	RES, CHIP 100K (1608)
R868	1-218-855-91	s	RES, CHIP 2.2K (1608)
RV100	1-225-796-21	s	RES, ADJ, CERMET 100K
RV101	1-225-791-21	s	RES, ADJ, CERMET 5K
RV102	1-225-789-21	s	RES, ADJ, CERMET 2K
RV103	1-225-793-21	s	RES, ADJ, CERMET 20K
RV200	1-225-796-21	s	RES, ADJ, CERMET 100K
RV201	1-225-791-21	s	RES, ADJ, CERMET 5K
RV202	1-225-789-21	s	RES, ADJ, CERMET 2K
RV203	1-225-791-21	s	RES, ADJ, CERMET 5K
RV204	1-225-793-21	s	RES, ADJ, CERMET 20K
RV205	1-225-791-21	s	RES, ADJ, CERMET 5K
RV300	1-225-793-21	s	RES, ADJ, CERMET 20K
RV400	1-225-791-21	s	RES, ADJ, CERMET 5K
RV401	1-225-792-21	s	RES, ADJ, CERMET 10K
RV500	1-225-795-21	s	RES, ADJ, CERMET 50K
RV700	1-225-792-21	s	RES, ADJ, CERMET 10K

(AE-31H BOARD (SUFFIX 25))

Ref. No. or Q'ty	Part No.	SP	Description
RV701	1-225-792-21	s	RES, ADJ, CERMET 10K
RV702	1-225-788-21	s	RES, ADJ, CERMET 1K
RV703	1-225-788-21	s	RES, ADJ, CERMET 1K
S100	1-692-881-41	s	SWITCH, SLIDE
S200	1-692-881-41	s	SWITCH, SLIDE
T500	1-433-326-11	s	TRANSFORMER, BIAS OSCILLATION
T600	1-424-511-11	s	TRANSFORMER, FE
TP100	1-535-877-22	s	CHIP, CHECKER
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP300	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER

APR-81 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-737-A	s	MOUNTED CIRCUIT BOARD, APR-81
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C101	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C102	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C104	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C105	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C106	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C107	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C110	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C111	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C200	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C203	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C204	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C205	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C206	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C207	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C208	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C209	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C210	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C211	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C214	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C215	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C216	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C217	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C218	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C219	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C220	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C221	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C222	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C223	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C300	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C301	1-107-420-21	s	CAP, CHIP ELECT 47MF
C302	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C400	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C401	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C404	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C405	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C406	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C802	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C805	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C806	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C808	1-126-402-21	s	CAP, CHIP ELECT 2.2MF (4X5.7)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C809	1-126-402-21	s	CAP, CHIP ELECT 2.2MF (4X5.7)
C812	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C813	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C817	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C821	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C850	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C851	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1035	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1038	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1050	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1051	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1052	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1053	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1054	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1055	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1056	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1060	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1064	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1065	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1066	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1076	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1086	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1100	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1101	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1110	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1217	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1218	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1219	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C1232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1251	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1252	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1253	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1254	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1255	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1256	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1257	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1258	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1259	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1260	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1261	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1262	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1263	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1264	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1265	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1266	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1267	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1268	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1269	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1270	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1281	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1282	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1283	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1284	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1285	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1286	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1291	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1292	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1293	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1294	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1295	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1296	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2030	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2031	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2032	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2050	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2051	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2052	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2053	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2054	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2060	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2064	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2400	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2401	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2402	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2403	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2404	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2405	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2406	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2407	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2408	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2409	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2410	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2411	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2412	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2413	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2414	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2425	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2426	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2427	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2428	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2429	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2430	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2431	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2432	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2433	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2434	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2435	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2436	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2437	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2438	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2442	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2444	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2446	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2450	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2452	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2454	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2456	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2458	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3012	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C3014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3020	1-100-505-91	s	CAP, CERAMIC 0.1MF C (1005)
C3021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3022	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3201	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4006	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C4007	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C4008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4009	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C4010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4012	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4014	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C4015	1-107-823-91	s	CAP, CERAMIC 470000PF B (2012)
C4016	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C4017	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4022	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C4023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4024	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C4025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4026	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4027	1-164-868-81	s	CAP, CHIP CERAMIC 56PF CH 1005
C4028	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C4029	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4034	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C4035	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C4036	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C4037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4042	1-164-846-81	s	CAP, CHIP CERAMIC 6PF CH 1005
C4043	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4044	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C4045	1-164-864-81	s	CAP, CHIP CERAMIC 39PF CH 1005
C4046	1-115-412-91	s	CAP,CHIP CERAMIC 680PF CH 1608
C4047	1-115-412-91	s	CAP,CHIP CERAMIC 680PF CH 1608
C4048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4049	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4052	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4055	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4059	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4065	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4066	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4067	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4068	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4069	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4070	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4076	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4080	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4090	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C4092	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C4093	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4202	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C4203	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C4204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4225	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C4226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4232	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C4233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4238	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4239	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4242	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4244	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4250	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C4251	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4257	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C4258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4264	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C4265	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C4266	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4268	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4269	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4271	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C4272	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4274	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C4275	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C4276	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4278	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4280	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C4281	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C4282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4296	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4350	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4360	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4382	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4392	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4393	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4394	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4395	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4406	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4412	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4450	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7090	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C7095	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C7101	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7102	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7110	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7112	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7114	1-135-810-21	s	CAP, CHIP FILM 270PF
C7115	1-135-810-21	s	CAP, CHIP FILM 270PF
C7119	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7120	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7122	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7124	1-135-810-21	s	CAP, CHIP FILM 270PF
C7125	1-135-810-21	s	CAP, CHIP FILM 270PF
C7129	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7132	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7133	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7142	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7143	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7145	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7152	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7153	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7155	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7156	1-135-349-21	s	CAP, ELECT 22MF (6.3X6)
C7190	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7191	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7192	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7193	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7201	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7202	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7210	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7212	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7214	1-135-810-21	s	CAP, CHIP FILM 270PF
C7215	1-135-810-21	s	CAP, CHIP FILM 270PF
C7219	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7220	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7222	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7224	1-135-810-21	s	CAP, CHIP FILM 270PF
C7225	1-135-810-21	s	CAP, CHIP FILM 270PF
C7229	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7232	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7233	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7242	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7243	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7245	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7252	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7253	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7255	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7290	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7291	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7292	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7293	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7310	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7311	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7312	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7313	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7320	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7321	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7322	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7323	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7350	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7351	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7352	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7360	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7361	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7362	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7410	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7411	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7412	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7413	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7420	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7421	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7422	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7423	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7450	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7451	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7452	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7460	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7461	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7462	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7500	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C7501	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C7700	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7701	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7810	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7811	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7820	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7821	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7840	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7841	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7850	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7851	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7910	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7911	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7920	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7921	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7940	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7941	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7950	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7951	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C8003	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C8004	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C8005	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C8006	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C8007	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C8008	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C8009	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C8010	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C8011	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C8050	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C8051	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C8090	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C8091	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C9000	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9012	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C9013	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C9014	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9015	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9016	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C9017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
D300	8-719-820-42	s	DIODE 1SS302-TE85L
D301	8-719-820-42	s	DIODE 1SS302-TE85L
D850	6-501-124-01	s	DIODE RSX101VA-30TR
D851	6-501-124-01	s	DIODE RSX101VA-30TR
D1202	8-719-077-09	s	DIODE CL-196HR-CD-T
D1203	8-719-074-31	s	DIODE CL-196YG-CD-T
D1204	8-719-074-31	s	DIODE CL-196YG-CD-T
D1205	8-719-074-31	s	DIODE CL-196YG-CD-T
D2200	8-719-074-31	s	DIODE CL-196YG-CD-T
D2201	8-719-074-31	s	DIODE CL-196YG-CD-T
D4000	8-719-989-01	s	DIODE DA221-TL
D4001	8-719-069-28	s	DIODE 1SS400TE-61
D4090	6-501-124-01	s	DIODE RSX101VA-30TR
D4091	6-501-124-01	s	DIODE RSX101VA-30TR
D4092	6-501-124-01	s	DIODE RSX101VA-30TR
D4093	6-501-124-01	s	DIODE RSX101VA-30TR
D4200	6-501-124-01	s	DIODE RSX101VA-30TR
D4201	6-501-124-01	s	DIODE RSX101VA-30TR
D4390	6-501-124-01	s	DIODE RSX101VA-30TR
D4391	6-501-124-01	s	DIODE RSX101VA-30TR
D4392	6-501-124-01	s	DIODE RSX101VA-30TR
D4393	6-501-124-01	s	DIODE RSX101VA-30TR
D7090	6-501-124-01	s	DIODE RSX101VA-30TR
D7091	6-501-124-01	s	DIODE RSX101VA-30TR
D7100	8-719-051-07	s	DIODE EC10DS2-TE12L5
D7101	8-719-820-42	s	DIODE 1SS302-TE85L
D7102	8-719-820-42	s	DIODE 1SS302-TE85L
D7135	8-719-820-42	s	DIODE 1SS302-TE85L
D7200	8-719-051-07	s	DIODE EC10DS2-TE12L5
D7201	8-719-820-42	s	DIODE 1SS302-TE85L

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D7202	8-719-820-42	s	DIODE 1SS302-TE85L
D7235	8-719-820-42	s	DIODE 1SS302-TE85L
D7310	8-719-820-42	s	DIODE 1SS302-TE85L
D7311	8-719-820-42	s	DIODE 1SS302-TE85L
D7320	8-719-820-42	s	DIODE 1SS302-TE85L
D7321	8-719-820-42	s	DIODE 1SS302-TE85L
D7410	8-719-820-42	s	DIODE 1SS302-TE85L
D7411	8-719-820-42	s	DIODE 1SS302-TE85L
D7420	8-719-820-42	s	DIODE 1SS302-TE85L
D7421	8-719-820-42	s	DIODE 1SS302-TE85L
D7500	6-501-124-01	s	DIODE RSX101VA-30TR
D7501	6-501-124-01	s	DIODE RSX101VA-30TR
D8000	8-719-820-42	s	DIODE 1SS302-TE85L
D8001	8-719-820-42	s	DIODE 1SS302-TE85L
D8002	8-719-820-42	s	DIODE 1SS302-TE85L
D8050	6-501-124-01	s	DIODE RSX101VA-30TR
D8051	6-501-124-01	s	DIODE RSX101VA-30TR
E101	1-535-877-22	s	CHIP, CHECKER
E300	1-535-877-22	s	CHIP, CHECKER
E501	1-535-877-22	s	CHIP, CHECKER
E502	1-535-877-22	s	CHIP, CHECKER
E801	1-535-877-22	s	CHIP, CHECKER
E802	1-535-877-22	s	CHIP, CHECKER
E803	1-535-877-22	s	CHIP, CHECKER
E1001	1-535-877-22	s	CHIP, CHECKER
E1002	1-535-877-22	s	CHIP, CHECKER
E1004	1-535-877-22	s	CHIP, CHECKER
E1005	1-535-877-22	s	CHIP, CHECKER
E2001	1-535-877-22	s	CHIP, CHECKER
E2002	1-535-877-22	s	CHIP, CHECKER
E2003	1-535-877-22	s	CHIP, CHECKER
E2004	1-535-877-22	s	CHIP, CHECKER
E2005	1-535-877-22	s	CHIP, CHECKER
E3000	1-535-877-22	s	CHIP, CHECKER
E3001	1-535-877-22	s	CHIP, CHECKER
E3002	1-535-877-22	s	CHIP, CHECKER
E4000	1-535-877-22	s	CHIP, CHECKER
E4001	1-535-877-22	s	CHIP, CHECKER
E4203	1-535-877-22	s	CHIP, CHECKER
E4211	1-535-877-22	s	CHIP, CHECKER
E4212	1-535-877-22	s	CHIP, CHECKER
E4290	1-535-877-22	s	CHIP, CHECKER
E4370	1-535-877-22	s	CHIP, CHECKER
E4400	1-535-877-22	s	CHIP, CHECKER
E4401	1-535-877-22	s	CHIP, CHECKER
E4402	1-535-877-22	s	CHIP, CHECKER
E4403	1-535-877-22	s	CHIP, CHECKER
E4407	1-535-877-22	s	CHIP, CHECKER
E4408	1-535-877-22	s	CHIP, CHECKER
E4450	1-535-877-22	s	CHIP, CHECKER
E7100	1-535-877-22	s	CHIP, CHECKER
E7131	1-535-877-22	s	CHIP, CHECKER
E7200	1-535-877-22	s	CHIP, CHECKER
E7231	1-535-877-22	s	CHIP, CHECKER
E8001	1-535-877-22	s	CHIP, CHECKER
E9001	1-535-877-22	s	CHIP, CHECKER
E9002	1-535-877-22	s	CHIP, CHECKER
E9003	1-535-877-22	s	CHIP, CHECKER

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E9004	1-535-877-22	s	CHIP, CHECKER
E9005	1-535-877-22	s	CHIP, CHECKER
F100	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F101	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F102	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F105	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F106	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F400	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F401	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F402	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F403	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
FB802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3000	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4000	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4200	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4201	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4202	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4203	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4204	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4205	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4206	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4207	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4208	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4209	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4210	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4350	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4360	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4400	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4401	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4402	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4450	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FL4000	1-233-892-21	s	FILTER, LOW PASS
IC203	6-701-572-01	s	IC TPS54610PWPR
IC204	6-701-572-01	s	IC TPS54610PWPR
IC300	6-704-161-01	s	IC S-80840CNUA-B8ZT2G
IC301	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC302	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC500	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC501	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC502	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC503	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC504	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC505	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC506	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC507	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC805	6-709-647-01	s	IC TLC2932AIPWR
IC806	6-709-647-01	s	IC TLC2932AIPWR
IC810	8-759-598-35	s	IC NJM2119M(TE2)
IC811	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC812	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC813	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC814	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC815	8-759-598-35	s	IC NJM2119M(TE2)
IC816	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC817	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC818	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC819	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC850	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC1001	8-759-392-77	s	IC SN74LVC245APWR
IC1002	8-759-392-77	s	IC SN74LVC245APWR
IC1003	8-759-392-77	s	IC SN74LVC245APWR
IC1004	8-759-392-77	s	IC SN74LVC245APWR
IC1200	6-707-096-01	s	IC AK4124VF-E2
IC1201	6-707-096-01	s	IC AK4124VF-E2
IC1202	6-707-096-01	s	IC AK4124VF-E2
IC1203	6-707-096-01	s	IC AK4124VF-E2
IC1205	6-707-096-01	s	IC AK4124VF-E2
IC1206	6-707-096-01	s	IC AK4124VF-E2
IC1207	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC1208	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC1209	8-759-392-77	s	IC SN74LVC245APWR
IC1210	8-759-392-77	s	IC SN74LVC245APWR
IC1211	8-759-392-77	s	IC SN74LVC245APWR
IC1212	8-759-392-77	s	IC SN74LVC245APWR
IC1213	8-759-392-77	s	IC SN74LVC245APWR
IC2200	8-759-392-77	s	IC SN74LVC245APWR
IC2201	8-759-392-77	s	IC SN74LVC245APWR
IC2203	8-759-392-77	s	IC SN74LVC245APWR
IC2204	8-759-392-77	s	IC SN74LVC245APWR
IC2205	8-759-392-77	s	IC SN74LVC245APWR
IC2206	8-759-392-77	s	IC SN74LVC245APWR
IC2207	8-759-639-85	s	IC SN65LVDS31DR
IC2208	8-759-639-85	s	IC SN65LVDS31DR
IC2209	8-759-639-85	s	IC SN65LVDS31DR
IC2400	6-707-096-01	s	IC AK4124VF-E2
IC2401	6-707-096-01	s	IC AK4124VF-E2
IC2402	6-707-096-01	s	IC AK4124VF-E2
IC2403	6-707-096-01	s	IC AK4124VF-E2
IC2404	6-707-096-01	s	IC AK4124VF-E2
IC2405	6-707-096-01	s	IC AK4124VF-E2
IC2406	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2407	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2408	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2409	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2410	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2411	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC3001	8-759-669-43	s	IC SN74LVC157APWR-12
IC3002	6-708-277-01	s	IC CDCVF25081PWR
IC3003	8-759-392-77	s	IC SN74LVC245APWR
IC3004	8-759-392-77	s	IC SN74LVC245APWR
IC3005	8-759-392-77	s	IC SN74LVC245APWR
IC3006	8-759-392-77	s	IC SN74LVC245APWR
IC3007	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3008	8-759-669-43	s	IC SN74LVC157APWR-12
IC3009	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC3010	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC3011	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC3013	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3014	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4000	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4001	8-759-398-57	s	IC LM1881MX NOPB
IC4002	8-759-398-57	s	IC LM1881MX NOPB
IC4003	6-701-453-01	s	IC SN75207BNSR
IC4004	8-759-394-70	s	IC NJM360M-TE2
IC4005	8-759-394-70	s	IC NJM360M-TE2

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC4006	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC4007	6-700-804-01	s	IC SN74LVC574APWR
IC4008	8-752-391-99	s	IC CXD2315Q-T4
IC4009	8-752-066-19	s	IC CXA1432M-T4
IC4010	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC4011	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4012	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4013	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4014	6-707-882-01	o	IC TC74VHC74FT(EKJ)
IC4015	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4016	8-759-669-73	s	IC TL082CPWR
IC4017	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC4018	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC4019	8-759-287-55	s	IC TC7S66FU(TE85R)
IC4020	8-759-669-73	s	IC TL082CPWR
IC4021	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4022	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC4023	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4024	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4025	6-700-804-01	s	IC SN74LVC574APWR
IC4026	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC4091	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC4092	6-704-155-01	s	IC UCC384DPTR-5
IC4201	8-759-573-97	s	IC SN74LVC541APWR
IC4203	6-709-647-01	s	IC TLC2932AIPWR
IC4204	8-759-183-53	s	IC TL431CPK-E2
IC4205	6-709-647-01	s	IC TLC2932AIPWR
IC4206	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC4207	6-709-647-01	s	IC TLC2932AIPWR
IC4208	6-709-647-01	s	IC TLC2932AIPWR
IC4211	8-759-669-73	s	IC TL082CPWR
IC4212	8-759-669-73	s	IC TL082CPWR
IC4213	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4214	8-759-669-73	s	IC TL082CPWR
IC4216	8-759-669-73	s	IC TL082CPWR
IC4218	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4220	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4221	8-759-669-73	s	IC TL082CPWR
IC4222	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4223	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4291	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4292	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4293	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4350	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4351	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4352	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC4353	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4360	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4361	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC4362	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC4363	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4391	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC4392	6-704-155-01	s	IC UCC384DPTR-5
IC4401	6-708-277-01	s	IC CDCVF25081PWR
IC4402	6-708-277-01	s	IC CDCVF25081PWR
IC4403	8-759-573-97	s	IC SN74LVC541APWR
IC4404	8-759-573-97	s	IC SN74LVC541APWR
IC4405	8-759-573-97	s	IC SN74LVC541APWR
IC4407	8-759-573-97	s	IC SN74LVC541APWR

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC4408	6-700-804-01	s	IC SN74LVC574APWR
IC4409	8-759-573-97	s	IC SN74LVC541APWR
IC4410	8-759-573-97	s	IC SN74LVC541APWR
IC4411	8-759-573-97	s	IC SN74LVC541APWR
IC4412	6-708-277-01	s	IC CDCVF25081PWR
IC4413	8-759-689-09	s	IC SN65LVDT2DBVR
IC4414	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4415	8-759-689-09	s	IC SN65LVDT2DBVR
IC4416	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4417	8-759-683-80	s	IC SN65LVDS1DBVR
IC4418	8-759-683-80	s	IC SN65LVDS1DBVR
IC4419	8-759-683-80	s	IC SN65LVDS1DBVR
IC4420	8-759-683-80	s	IC SN65LVDS1DBVR
IC4421	8-759-683-80	s	IC SN65LVDS1DBVR
IC4422	8-759-683-80	s	IC SN65LVDS1DBVR
IC4423	8-759-683-80	s	IC SN65LVDS1DBVR
IC4424	8-759-683-80	s	IC SN65LVDS1DBVR
IC4425	6-700-804-01	s	IC SN74LVC574APWR
IC4426	8-759-573-97	s	IC SN74LVC541APWR
IC4427	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC4428	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC4450	6-708-277-01	s	IC CDCVF25081PWR
IC4451	6-700-804-01	s	IC SN74LVC574APWR
IC4452	8-759-669-43	s	IC SN74LVC157APWR-12
IC4455	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC7091	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC7101	6-711-882-01	s	IC AK4396VF-E2
IC7110	8-759-394-77	s	IC NJM5534M(TE2)
IC7120	8-759-394-77	s	IC NJM5534M(TE2)
IC7140	8-759-394-77	s	IC NJM5534M(TE2)
IC7150	8-759-394-77	s	IC NJM5534M(TE2)
IC7201	6-711-882-01	s	IC AK4396VF-E2
IC7210	8-759-394-77	s	IC NJM5534M(TE2)
IC7220	8-759-394-77	s	IC NJM5534M(TE2)
IC7240	8-759-394-77	s	IC NJM5534M(TE2)
IC7250	8-759-394-77	s	IC NJM5534M(TE2)
IC7311	6-701-691-01	s	IC AK5355VT-E2
IC7321	6-701-691-01	s	IC AK5355VT-E2
IC7411	6-701-691-01	s	IC AK5355VT-E2
IC7421	6-701-691-01	s	IC AK5355VT-E2
IC7500	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC7700	8-759-394-74	s	IC NJM4580E-D-TE2
IC8000	6-701-691-01	s	IC AK5355VT-E2
IC8002	8-759-394-74	s	IC NJM4580E-D-TE2
IC8050	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC9000	6-709-647-01	s	IC TLC2932AIPWR
IC9001	6-711-759-01	s	IC SM5819AF
IC9002	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9003	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9004	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9005	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC9006	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
L100	1-416-345-21	s	COIL, CHOKE 22UH
L101	1-419-630-21	s	COIL, CHOKE 4.7UH
L103	1-416-344-21	s	COIL, CHOKE 10UH
L106	1-416-345-21	s	COIL, CHOKE 22UH
L107	1-416-345-21	s	COIL, CHOKE 22UH
L200	1-416-948-21	s	COIL, CHOKE 10UH

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L201	1-416-948-21	s	COIL, CHOKE 10UH
L400	1-419-630-21	s	COIL, CHOKE 4.7UH
L401	1-419-630-21	s	COIL, CHOKE 4.7UH
L402	1-416-344-21	s	COIL, CHOKE 10UH
L500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L800	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L801	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1051	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1052	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1053	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1054	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1055	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1056	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1060	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1291	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1292	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1293	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1294	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1295	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1296	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2051	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2052	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2053	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2054	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2060	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2400	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2405	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-412-949-21	s	INDUCTOR 6.8UH (2520)
L4003	1-412-963-21	s	INDUCTOR 100UH (2520)
L4004	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
L4005	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L7095	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L7150	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L7250	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L8090	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L8091	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9000	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q300	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q301	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q302	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q303	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q304	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q305	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q306	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q3000	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q4000	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4001	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4002	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q4003	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4004	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q4005	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q4006	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q4007	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q4008	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q4200	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q4201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4202	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q7000	6-551-285-01	s	TRANSISTOR SI6925ADQ-T1
R200	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R202	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R203	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R204	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R205	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R206	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R207	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R208	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R209	1-242-967-81	s	RES, CHIP 1.0 (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R214	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R215	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R216	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R217	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R218	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R219	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R220	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R300	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R302	1-245-908-11	s	RES, METAL FILM(SMD)330K(1608)
R303	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R304	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R305	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R306	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R307	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R308	1-245-851-11	s	RES, METAL FILM(SMD)9.1K(1608)
R309	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R311	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R313	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R314	1-245-856-11	s	RES, METAL FILM(SMD) 15K(1608)
R315	1-245-900-11	s	RES, METAL FILM(SMD)150K(1608)
R316	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R317	1-245-772-11	s	RES, METAL FILM(SMD) 220(1608)
R500	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R501	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R502	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R503	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R504	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R505	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R506	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R507	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R508	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R509	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R510	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R511	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R512	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R800	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R801	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R802	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R803	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R804	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R805	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R806	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R807	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R808	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R809	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R810	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R811	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R1000	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1001	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1002	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1003	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1004	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1005	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1006	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1007	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1008	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1009	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1010	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1011	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1012	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1013	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1014	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1015	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1016	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1017	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1018	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1019	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1020	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1021	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1022	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1023	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1025	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1026	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1027	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1028	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1030	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1031	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1032	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1033	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1034	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1035	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1036	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1037	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1038	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1039	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1040	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1041	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1042	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1043	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1044	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1045	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1046	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1047	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1048	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1049	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1050	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1051	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1052	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1053	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1054	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1055	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1056	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1057	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1058	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1059	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1060	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1061	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1062	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1063	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1064	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1065	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1067	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1069	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1071	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1073	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1075	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1077	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1079	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1080	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1082	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1084	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1087	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1088	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1091	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1092	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1095	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1097	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1099	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1100	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1103	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1105	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1107	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1108	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1111	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1113	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1114	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1115	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1116	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1117	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1118	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1119	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1120	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1121	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1122	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1123	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1124	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1125	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1126	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1127	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1128	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1129	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1130	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1131	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1132	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1133	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1134	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1135	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1136	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1137	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1138	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1139	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1140	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1141	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1142	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1143	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1144	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1145	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1146	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1147	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1148	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1149	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1150	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1151	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1152	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1153	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1154	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1155	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1156	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1157	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1158	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1159	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1160	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1161	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1162	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1163	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1164	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1165	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1166	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1167	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1168	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1169	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1170	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1174	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1175	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1176	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1177	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1181	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1182	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1183	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1184	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1185	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1186	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1187	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1188	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1189	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1194	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1195	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1196	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1197	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1198	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1199	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1200	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1201	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1202	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1203	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1204	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1205	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1206	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1207	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1208	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1209	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1210	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1211	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1212	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1213	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1214	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1215	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1216	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1217	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1218	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1219	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1220	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1221	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1222	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1223	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1224	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1225	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1226	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1227	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1228	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1229	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1230	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1231	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1232	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1233	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1234	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1235	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1236	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1237	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1238	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1239	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1240	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1241	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1242	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1243	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1244	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1245	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R1246	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1247	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1248	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1249	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1250	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1400	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1401	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1402	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1403	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1404	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1405	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1406	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1407	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1408	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1409	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1410	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1411	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1412	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1413	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1414	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1415	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1416	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1417	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1418	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1419	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1420	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1421	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1422	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1423	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1424	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1425	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1426	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1427	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1428	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1429	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1430	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1431	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1432	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1433	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1434	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1435	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1436	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1437	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1438	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1439	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1440	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1441	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1442	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1443	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1444	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1445	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1446	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1447	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1448	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1449	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1450	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1451	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1452	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1453	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1454	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1455	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1456	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1457	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1458	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1459	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1460	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1461	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1462	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1463	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1464	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1465	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1466	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1467	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1468	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1469	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1470	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1471	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1472	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1473	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1474	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1475	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1476	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1477	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1478	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1479	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1480	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1481	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1482	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1483	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1484	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1485	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1486	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1487	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1488	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1489	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1490	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1491	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1492	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1493	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1494	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1495	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1496	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1497	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1498	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1499	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1500	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1501	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1502	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1503	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1504	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1505	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1506	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1507	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1508	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1509	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1510	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1511	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1512	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1513	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1514	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1515	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1516	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1517	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1518	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1519	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1520	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1521	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1522	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1523	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1524	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1525	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1526	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1527	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1528	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1529	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1530	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1531	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1532	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1533	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1534	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1535	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1536	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1537	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1538	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1539	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1540	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1541	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1542	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1543	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1544	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1545	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1546	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1547	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1548	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1549	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1550	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1551	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1552	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1553	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1554	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1555	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1556	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1557	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1558	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1559	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1560	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1561	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1562	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1563	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1564	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1565	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1566	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1567	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1568	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1569	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1570	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1571	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1572	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1573	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1574	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1575	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1576	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1577	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1578	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1579	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1580	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1581	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1582	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1583	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1584	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1585	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1586	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1587	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1588	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1589	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1590	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1591	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1592	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1593	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1594	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1595	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1596	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1597	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1598	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1599	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1600	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1601	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1602	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1603	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1604	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1605	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1606	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1607	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1608	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1609	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1610	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1611	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1612	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1613	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1614	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1615	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1616	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1617	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1618	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1619	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1620	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1621	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1622	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1623	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1624	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1625	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1626	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1627	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1628	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1629	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1630	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1631	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1632	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1633	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1634	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1635	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1636	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1637	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1638	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1639	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1640	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1641	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1642	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1643	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1644	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1645	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1646	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1647	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1648	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1649	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1650	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1651	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1652	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1653	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1654	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1655	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1656	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1657	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1658	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1659	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1660	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1661	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1662	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1663	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1664	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1665	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1666	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1667	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1668	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1669	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1670	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1671	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1672	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1673	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1674	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1675	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1676	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1677	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1678	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1679	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1680	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1681	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1682	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1683	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1684	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1685	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1686	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1687	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1688	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1689	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1690	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1691	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1692	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1693	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1694	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1695	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1696	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1697	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1698	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1699	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1700	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1701	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1702	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1703	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1704	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1705	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1706	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1707	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1708	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1709	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1710	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1711	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1712	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1713	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1714	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1715	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1716	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1717	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1718	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1719	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1720	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1721	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1722	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1723	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1724	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1725	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1726	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1727	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1728	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1729	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1730	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1731	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1732	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1733	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1734	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1735	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1736	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1737	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1738	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1739	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1740	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1741	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1742	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1743	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1744	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1745	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1746	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1747	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1748	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1749	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1750	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1751	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1752	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1753	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1754	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1755	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1756	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1757	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1758	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1759	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1760	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1761	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1762	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1763	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1764	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1765	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1766	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1767	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1768	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1769	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1770	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1771	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1772	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1773	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1774	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1775	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1776	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1777	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1778	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1779	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1780	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1781	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1782	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1783	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1784	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1785	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1786	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1787	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1788	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1789	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1790	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1791	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1792	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1793	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1794	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1795	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1796	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1797	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1798	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1799	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1800	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1801	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1802	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1803	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1804	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1805	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1806	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1807	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1808	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1809	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1810	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1811	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1812	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1813	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1814	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1815	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1816	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1817	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1818	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1819	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1820	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1821	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1822	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1823	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1824	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1825	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1826	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1827	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1828	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1829	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1830	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1831	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1832	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1833	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1834	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1835	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1836	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1837	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1838	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1839	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1840	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1841	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1842	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1843	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1844	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1845	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1846	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1847	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1848	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1849	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1850	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1851	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1852	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1853	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1854	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1855	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1856	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1857	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1858	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1859	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1860	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1861	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1862	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1863	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1864	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1865	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1866	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1867	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1868	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1869	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1870	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1871	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1872	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1873	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1874	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1875	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1876	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1877	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1878	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1879	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1880	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1881	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1882	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1883	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1884	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1885	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1886	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1887	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1888	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1889	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1890	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1891	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1892	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1893	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1894	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1895	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1896	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1897	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1898	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1899	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1900	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1901	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1902	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1903	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1904	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1905	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1906	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1907	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1908	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1909	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1910	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1911	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1912	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1913	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1914	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1915	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1916	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1917	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1918	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1919	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1920	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1921	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1922	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1923	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1924	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1925	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1926	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1927	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1928	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1929	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1930	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1931	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1932	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1933	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1934	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1935	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1936	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1937	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1938	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1939	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1940	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1941	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1942	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1943	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1944	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1945	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1975	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1980	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1990	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1991	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2000	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2001	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2002	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2003	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2004	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2005	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2006	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2007	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2008	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2009	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2010	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2011	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2012	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2013	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2014	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2015	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2016	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2017	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2018	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2019	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2020	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2021	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2022	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2023	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2025	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2030	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2031	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2032	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2033	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2034	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2035	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2036	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2037	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2038	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2039	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2041	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2042	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2050	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2051	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2052	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2200	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2201	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2202	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2203	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2204	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2205	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2206	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2207	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2208	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2209	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2210	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2211	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2212	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2213	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2214	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2215	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2216	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2217	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2218	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2219	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R2229	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2230	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2236	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2243	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2244	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2245	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2246	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2253	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2254	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2255	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2256	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2257	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2258	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2265	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2266	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2267	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2268	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2269	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2270	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2271	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2272	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2273	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2274	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2275	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2276	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2277	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2278	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2279	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2280	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2281	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2282	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2283	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2284	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2285	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2286	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2287	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2288	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2289	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2290	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2291	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2292	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2293	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2294	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2295	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2296	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2297	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2298	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2301	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2302	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2303	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2304	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2305	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2306	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2307	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2308	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2309	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2310	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2311	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2312	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2313	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2314	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2315	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2316	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2317	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2318	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2319	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2320	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2321	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2322	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2323	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2324	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2325	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2326	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2327	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2328	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2329	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2330	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2331	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2332	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2333	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2334	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2335	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2336	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2337	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2338	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2339	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2340	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2341	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2342	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2343	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2344	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2345	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2346	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2350	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2351	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2352	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2353	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2354	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2367	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2368	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2369	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2370	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2372	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2375	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2380	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2381	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2382	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2383	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2384	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2385	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2390	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2391	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2392	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2393	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2394	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2395	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2400	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2401	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2402	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2403	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2405	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2421	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2426	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2457	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2458	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2459	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2460	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2461	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2462	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2463	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2464	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2465	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2466	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2467	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2468	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2469	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2470	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2471	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2472	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2473	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2474	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2475	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2476	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2477	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2478	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2479	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2480	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2481	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2482	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2483	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2484	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2485	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2486	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2487	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2488	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2489	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2490	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2491	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2492	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2493	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2494	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2495	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2496	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2497	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2498	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2499	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2500	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2501	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2502	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2503	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2504	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2505	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2506	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2507	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2508	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2509	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2510	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2511	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2512	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2513	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2514	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2515	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2516	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2517	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2518	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2519	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2520	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2521	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2522	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2523	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2524	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2525	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2526	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2527	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2528	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2529	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2530	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2531	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2532	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2533	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2534	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2535	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2536	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2537	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2538	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2539	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2540	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2541	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2542	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2543	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2544	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2545	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2546	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2547	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2548	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2549	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2550	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2551	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2552	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2553	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2554	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2555	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2556	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2557	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2558	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2559	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2560	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2561	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2562	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2563	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2564	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2565	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2566	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2567	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2568	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2569	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2570	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2571	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2572	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2573	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2574	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2575	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2576	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2577	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2578	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2579	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2580	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2581	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2582	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2583	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2584	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2585	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2586	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2587	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2588	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2589	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2590	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2591	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2592	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2593	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2594	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2595	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2596	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2597	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2598	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2599	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2600	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2601	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2602	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2603	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2604	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2605	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2606	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2607	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2608	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2609	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2610	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2611	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2612	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2613	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2614	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2615	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2616	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2617	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2618	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2619	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2620	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2621	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2622	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2623	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2624	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2625	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2626	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2627	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2628	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2629	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2630	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2631	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2632	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2633	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2634	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2635	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2636	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2637	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2638	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2639	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2640	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2641	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2642	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2643	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2644	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2645	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2646	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2647	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2648	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2649	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2650	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2651	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2652	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2653	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2654	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2655	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2656	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2657	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2658	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2659	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2660	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2661	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2662	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2663	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2664	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2665	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2666	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2667	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2668	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2669	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2670	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2671	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2672	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2673	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2674	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2675	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2676	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2677	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2678	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2679	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2680	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2681	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2682	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2683	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2684	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2685	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2686	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2687	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2688	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2689	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2690	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2691	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2692	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2693	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2694	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2695	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2696	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2697	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2698	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2699	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2700	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2701	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2702	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2703	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2704	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2705	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2706	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2707	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2708	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2709	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2710	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2711	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2712	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2713	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2714	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2715	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2716	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2717	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2718	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2719	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2720	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2721	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2722	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2723	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2724	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2725	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2726	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2727	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2728	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2729	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2730	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2731	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2732	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2733	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2734	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2735	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2736	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2737	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2738	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2739	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2740	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2741	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2742	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2743	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2744	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2745	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2746	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2747	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2748	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2749	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2750	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2751	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2752	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2753	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2754	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2755	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2756	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2757	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2758	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2759	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2760	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2761	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2762	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2763	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2764	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2765	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2766	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2767	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2768	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2769	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2770	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2771	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2772	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2773	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2774	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2775	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2776	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2777	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2778	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2779	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2780	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2781	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2782	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2783	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2784	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2785	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2786	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2787	1-218-941-81	s	RES, CHIP 100
R2788	1-218-941-81	s	RES, CHIP 100
R2789	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2790	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2791	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2792	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2793	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2794	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2795	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2796	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2797	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2798	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2799	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2800	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2801	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2802	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2803	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2804	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2805	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2806	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2807	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2808	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2809	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2810	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2811	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2812	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2813	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2814	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2815	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2816	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2817	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2818	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2819	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2820	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2821	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2822	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2823	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2824	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2825	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2826	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2827	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2828	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2829	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2830	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2831	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2832	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2833	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2834	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2835	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2836	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2837	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2838	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2839	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2840	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2841	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2842	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2843	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2844	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2845	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2846	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2847	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2848	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2849	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2850	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2851	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2852	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2853	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2854	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2855	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2856	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2857	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2858	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2859	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2860	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3000	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3001	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3002	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3003	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3004	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3005	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3006	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3007	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3008	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3009	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3010	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3011	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3012	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3013	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3014	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3015	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3016	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3017	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3018	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3019	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3020	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3021	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3022	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3023	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3025	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3026	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3027	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3028	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3030	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3031	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3032	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3033	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3034	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3035	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3036	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3037	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3038	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3039	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3040	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3041	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3042	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3043	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3044	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3045	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3046	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3047	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3048	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3049	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3050	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3051	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3052	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3053	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3054	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3055	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3056	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3057	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3058	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3059	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3060	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3061	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3062	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3063	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3064	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3065	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3066	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3067	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3068	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3069	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3070	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3071	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3072	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3073	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3074	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3075	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3076	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3077	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3078	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3079	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3080	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3081	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3082	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3083	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3084	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3085	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3086	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3087	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3088	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3089	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3090	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3091	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3092	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3093	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3094	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3095	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3096	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3097	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3098	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3099	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3100	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3101	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3102	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3103	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3104	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3105	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3106	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3107	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3108	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3109	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3110	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3111	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3112	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3113	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3114	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3115	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3116	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3117	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3118	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3119	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3120	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3121	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3122	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3123	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3124	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3125	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3126	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3127	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3128	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3129	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3130	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3131	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3132	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3133	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3134	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3135	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3136	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3137	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3138	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3139	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3140	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3141	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3142	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3143	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3144	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3145	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3146	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3147	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3148	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3149	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3150	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3152	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3153	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3154	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3156	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3158	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3159	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3160	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3161	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3162	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3163	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3164	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3165	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3166	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3167	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3169	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3170	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R3171	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R3172	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3173	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3174	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3175	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3176	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3177	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3178	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3179	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3180	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3181	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3187	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3199	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3201	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3204	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3205	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3206	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3207	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3208	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3213	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3214	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3215	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3247	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3250	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3251	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3252	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3260	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3261	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3262	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3263	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3264	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3265	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3268	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3269	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3270	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3273	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3275	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3276	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3277	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3278	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3279	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3280	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3281	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4000	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4001	1-245-728-11	s	RES, METAL FILM(SMD) 22 (1608)
R4002	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R4003	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R4004	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4005	1-245-773-11	s	RES, METAL FILM(SMD) 240(1608)
R4006	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4008	1-245-817-11	s	RES, METAL FILM(SMD)2.4K(1608)
R4009	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4010	1-245-736-11	s	RES, METAL FILM(SMD) 47 (1608)
R4011	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4012	1-245-806-11	s	RES, METAL FILM(SMD) 820(1608)
R4013	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4014	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4015	1-245-846-11	s	RES, METAL FILM(SMD)5.6K(1608)
R4016	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4017	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4018	1-216-863-91	s	RES, CHIP 3.3M (1608)
R4019	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4020	1-245-772-11	s	RES, METAL FILM(SMD) 220(1608)
R4021	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4022	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4023	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R4024	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4025	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4026	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4027	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4028	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4029	1-216-863-91	s	RES, CHIP 3.3M (1608)
R4030	1-216-863-91	s	RES, CHIP 3.3M (1608)
R4031	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4032	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4033	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4034	1-245-819-11	s	RES, METAL FILM(SMD) 3K (1608)
R4035	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4036	1-218-919-91	s	RES, CHIP 1M (1608)
R4037	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4038	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4039	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4040	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4041	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4042	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4044	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4045	1-245-885-11	s	RES, METAL FILM(SMD) 36K(1608)
R4046	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4047	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4048	1-245-810-11	s	RES, METAL FILM(SMD)1.2K(1608)
R4049	1-245-890-11	s	RES, METAL FILM(SMD) 56K(1608)
R4050	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4051	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R4052	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4053	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4054	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4065	1-245-736-11	s	RES, METAL FILM(SMD) 47 (1608)
R4066	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4067	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4068	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4069	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4072	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4073	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4074	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4075	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4076	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4077	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4078	1-245-773-11	s	RES, METAL FILM(SMD) 240(1608)
R4079	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4080	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4081	1-245-776-11	s	RES, METAL FILM(SMD) 330(1608)
R4082	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R4083	1-245-776-11	s	RES, METAL FILM(SMD) 330(1608)
R4084	1-245-736-11	s	RES, METAL FILM(SMD) 47 (1608)
R4086	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4087	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4088	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R4089	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4090	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R4091	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4200	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4201	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4202	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R4203	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4204	1-245-812-11	s	RES, METAL FILM(SMD)1.5K(1608)
R4205	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4206	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4207	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4208	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4209	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R4210	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4211	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4212	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R4213	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4216	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4219	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4220	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4221	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4222	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4223	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4224	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4225	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4226	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4227	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4228	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4229	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4230	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4231	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4232	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4233	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4234	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4235	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4236	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4237	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4238	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4239	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4240	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4241	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4242	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4243	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4244	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4245	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4246	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4247	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4248	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4249	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4250	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4251	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4252	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4253	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4254	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4255	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4256	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4257	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4259	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4263	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4264	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4266	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4267	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4268	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4269	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4270	1-245-904-11	s	RES, METAL FILM(SMD)220K(1608)
R4271	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4272	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4276	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4277	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4278	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R4279	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4280	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4281	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4282	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R4283	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4284	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4285	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4286	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4287	1-245-810-11	s	RES, METAL FILM(SMD)1.2K(1608)
R4288	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4291	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4292	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4293	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4296	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4297	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4298	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4299	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4300	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4303	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R4304	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R4305	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R4306	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4307	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4308	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4309	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4310	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4312	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4314	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4315	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4316	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4317	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4318	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4319	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4320	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4321	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4322	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4323	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4324	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4325	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4326	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4327	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4350	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4351	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4352	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4353	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4354	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4360	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4361	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4362	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4363	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4364	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4370	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4371	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4380	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4381	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4382	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4383	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4384	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4385	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4386	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4387	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4388	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4389	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4391	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4392	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4393	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4394	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4395	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4401	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4402	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4403	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4404	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4405	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4406	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4407	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4408	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4409	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4410	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4411	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4412	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4413	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4414	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4415	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4416	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4417	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4418	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4419	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4420	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4421	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4422	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4423	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4424	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4425	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4426	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4427	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4428	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4429	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4430	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4431	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4432	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4433	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4434	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4435	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4436	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4437	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4438	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4439	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4440	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4441	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4442	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4443	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4444	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4445	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4446	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4447	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4448	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4449	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4450	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4451	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4452	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4453	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4454	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4455	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4456	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4457	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4458	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4463	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4464	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4465	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4466	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4467	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4468	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4469	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4470	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4471	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4472	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4473	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4474	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4475	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4476	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4477	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4478	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4479	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4480	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4481	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4482	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4483	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4484	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4485	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4486	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4487	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4488	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4489	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4490	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4491	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4492	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4493	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4494	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4495	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4496	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4497	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4498	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4499	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4500	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4501	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4502	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4503	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4504	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4505	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4506	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4507	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4508	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4509	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4510	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4511	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4512	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4513	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4514	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4516	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4525	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4551	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4552	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4553	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4554	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4555	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4556	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4557	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4558	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4560	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4561	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4562	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R7100	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7101	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7102	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7103	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7104	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7110	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7111	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7112	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7113	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7114	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7115	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7116	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7117	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7118	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7119	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7120	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7121	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7122	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7123	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7124	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7125	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7126	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7127	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7128	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7129	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7130	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7131	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7132	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7133	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7135	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7140	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7141	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7143	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7150	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7151	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7153	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7181	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7182	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7183	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7184	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7185	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7186	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7187	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7188	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7190	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7191	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7192	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7193	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7200	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7201	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7202	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7203	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7204	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7210	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7211	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7212	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7213	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7214	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7215	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7216	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7217	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7218	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7219	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7220	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7221	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7222	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7223	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7224	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7225	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7226	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7227	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7228	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7229	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7230	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7231	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7232	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7233	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7235	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7240	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7241	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7243	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7250	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7251	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7253	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7281	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7282	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7283	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7284	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7285	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7286	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7287	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7288	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7290	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7291	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7292	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7293	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7310	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7311	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7312	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7313	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7314	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7315	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7316	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7317	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7318	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7320	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7321	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7322	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7323	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7324	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7325	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7326	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7327	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7328	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7410	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7411	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7412	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7413	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7414	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7415	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7416	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7417	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7418	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7420	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7421	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7422	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7423	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7424	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7425	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7426	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7427	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7428	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8000	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R8001	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R8002	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8003	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R8004	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R8005	1-245-812-11	s	RES, METAL FILM(SMD)1.5K(1608)
R8007	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8009	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R8011	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8012	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8013	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8014	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8015	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8016	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R8021	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R9000	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9001	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9002	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9003	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9004	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9005	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9006	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9007	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9008	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9009	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9010	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9016	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9017	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9018	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9019	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R9020	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R9021	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R9023	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R9024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9025	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9026	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9027	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9028	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9030	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9031	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9032	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9033	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9034	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9050	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9051	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
RB300	1-233-577-21	s	RES, CHIP NETWORK 470 (3216)
RB1000	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1006	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1007	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1200	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1201	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1202	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1203	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1204	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1205	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1217	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1218	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1219	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1220	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3000	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3001	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3002	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3003	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3004	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3005	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3009	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3010	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3011	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3012	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RV4200	1-225-804-21	s	RES, ADJ, CERMET 200
RY7100	1-755-380-21	s	RELAY
RY7200	1-755-380-21	s	RELAY
S1200	1-692-270-41	s	SWITCH, SLIDE
S2200	1-692-270-41	s	SWITCH, SLIDE
S2201	1-762-117-21	s	SWITCH, ROTARY
S2202	1-762-117-21	s	SWITCH, ROTARY
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP300	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP505	1-535-877-22	s	CHIP, CHECKER
TP581	1-535-877-22	s	CHIP, CHECKER
TP582	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP811	1-535-877-22	s	CHIP, CHECKER
TP812	1-535-877-22	s	CHIP, CHECKER
TP813	1-535-877-22	s	CHIP, CHECKER
TP814	1-535-877-22	s	CHIP, CHECKER
TP1011	1-535-877-22	s	CHIP, CHECKER
TP1012	1-535-877-22	s	CHIP, CHECKER
TP1013	1-535-877-22	s	CHIP, CHECKER
TP1014	1-535-877-22	s	CHIP, CHECKER
TP1015	1-535-877-22	s	CHIP, CHECKER
TP1016	1-535-877-22	s	CHIP, CHECKER
TP1061	1-535-877-22	s	CHIP, CHECKER
TP1062	1-535-877-22	s	CHIP, CHECKER
TP1063	1-535-877-22	s	CHIP, CHECKER
TP1064	1-535-877-22	s	CHIP, CHECKER
TP1065	1-535-877-22	s	CHIP, CHECKER
TP1066	1-535-877-22	s	CHIP, CHECKER
TP1071	1-535-877-22	s	CHIP, CHECKER
TP1072	1-535-877-22	s	CHIP, CHECKER
TP1081	1-535-877-22	s	CHIP, CHECKER
TP1082	1-535-877-22	s	CHIP, CHECKER
TP2200	1-535-877-22	s	CHIP, CHECKER
TP2201	1-535-877-22	s	CHIP, CHECKER
TP2202	1-535-877-22	s	CHIP, CHECKER
TP2203	1-535-877-22	s	CHIP, CHECKER

(APR-81 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP3001	1-535-877-22	s	CHIP, CHECKER
TP4000	1-535-877-22	s	CHIP, CHECKER
TP4001	1-535-877-22	s	CHIP, CHECKER
TP4002	1-535-877-22	s	CHIP, CHECKER
TP4003	1-535-877-22	s	CHIP, CHECKER
TP4004	1-535-877-22	s	CHIP, CHECKER
TP4005	1-535-877-22	s	CHIP, CHECKER
TP4007	1-535-877-22	s	CHIP, CHECKER
TP4200	1-535-877-22	s	CHIP, CHECKER
TP4201	1-535-877-22	s	CHIP, CHECKER
TP4202	1-535-877-22	s	CHIP, CHECKER
TP4204	1-535-877-22	s	CHIP, CHECKER
TP4207	1-535-877-22	s	CHIP, CHECKER
TP4209	1-535-877-22	s	CHIP, CHECKER
TP4213	1-535-877-22	s	CHIP, CHECKER
TP4214	1-535-877-22	s	CHIP, CHECKER
TP4242	1-535-877-22	s	CHIP, CHECKER
TP4243	1-535-877-22	s	CHIP, CHECKER
TP4291	1-535-877-22	s	CHIP, CHECKER
TP4292	1-535-877-22	s	CHIP, CHECKER
TP4293	1-535-877-22	s	CHIP, CHECKER
TP4370	1-535-877-22	s	CHIP, CHECKER
TP4400	1-535-877-22	s	CHIP, CHECKER
TP4401	1-535-877-22	s	CHIP, CHECKER
TP4402	1-535-877-22	s	CHIP, CHECKER
TP4403	1-535-877-22	s	CHIP, CHECKER
TP4407	1-535-877-22	s	CHIP, CHECKER
TP4408	1-535-877-22	s	CHIP, CHECKER
TP4409	1-535-877-22	s	CHIP, CHECKER
TP4450	1-535-877-22	s	CHIP, CHECKER
TP7101	1-535-877-22	s	CHIP, CHECKER
TP7102	1-535-877-22	s	CHIP, CHECKER
TP7131	1-535-877-22	s	CHIP, CHECKER
TP7201	1-535-877-22	s	CHIP, CHECKER
TP7202	1-535-877-22	s	CHIP, CHECKER
TP7231	1-535-877-22	s	CHIP, CHECKER
TP8001	1-535-877-22	s	CHIP, CHECKER
TP9000	1-535-877-22	s	CHIP, CHECKER
TP9001	1-535-877-22	s	CHIP, CHECKER
TP9002	1-535-877-22	s	CHIP, CHECKER
TP9021	1-535-877-22	s	CHIP, CHECKER
TP9070	1-535-877-22	s	CHIP, CHECKER
TP9071	1-535-877-22	s	CHIP, CHECKER
TP9072	1-535-877-22	s	CHIP, CHECKER
TP9080	1-535-877-22	s	CHIP, CHECKER
TP9081	1-535-877-22	s	CHIP, CHECKER
TP9082	1-535-877-22	s	CHIP, CHECKER
TP9083	1-535-877-22	s	CHIP, CHECKER
TP9101	1-535-877-22	s	CHIP, CHECKER
TP9102	1-535-877-22	s	CHIP, CHECKER
X4200	1-795-677-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4201	1-795-676-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4202	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4203	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4204	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4205	1-813-003-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4350	1-814-056-11	s	OSCILLATOR, CRYSTAL (TCXO)
X4360	1-814-057-11	s	OSCILLATOR, CRYSTAL (TCXO)
X9000	1-813-394-12	s	OSCILLATOR, CRYSTAL (VCXO) 5V

APR-91 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1768-615-A	s	MOUNTED CIRCUIT BOARD, APR-91
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C101	1-116-099-11	s	CAP, ELECT 100MF 105
C102	1-116-117-11	s	CAP, ELECT 22MF 105
C104	1-116-117-11	s	CAP, ELECT 22MF 105
C106	1-116-099-11	s	CAP, ELECT 100MF 105
C107	1-116-099-11	s	CAP, ELECT 100MF 105
C110	1-116-117-11	s	CAP, ELECT 22MF 105
C111	1-116-117-11	s	CAP, ELECT 22MF 105
C210	1-116-346-11	s	CAP, ELECT 47MF 105
C212	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C220	1-116-346-11	s	CAP, ELECT 47MF 105
C222	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C223	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C224	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C225	1-164-936-81	s	CAP, CHIP CERAMIC 680PF B 1005
C226	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C227	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C228	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C300	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C301	1-107-420-21	s	CAP, CHIP ELECT 47MF
C302	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C401	1-116-099-11	s	CAP, ELECT 100MF 105
C405	1-116-099-11	s	CAP, ELECT 100MF 105
C406	1-116-099-11	s	CAP, ELECT 100MF 105
C500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C507	1-116-346-11	s	CAP, ELECT 47MF 105
C508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C802	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C805	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C806	1-127-949-21	s	CAP, CHIP FILM 0.0068MF (2012)
C808	1-126-402-21	s	CAP, CHIP ELECT 2.2MF (4X5.7)
C809	1-126-402-21	s	CAP, CHIP ELECT 2.2MF (4X5.7)
C812	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C813	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C816	1-116-117-11	s	CAP, ELECT 22MF 105
C817	1-116-117-11	s	CAP, ELECT 22MF 105
C818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C819	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C820	1-116-117-11	s	CAP, ELECT 22MF 105
C821	1-116-117-11	s	CAP, ELECT 22MF 105
C822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C850	1-116-346-11	s	CAP, ELECT 47MF 105
C851	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C1001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1050	1-116-099-11	s	CAP, ELECT 100MF 105
C1051	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1053	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1055	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1056	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1062	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1070	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C1071	1-116-346-11	s	CAP, ELECT 47MF 105
C1072	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1074	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1076	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1077	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1078	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1079	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C1080	1-114-167-21	s	CAP, ELECT 1200MF 105
C1081	1-116-340-11	s	CAP, ELECT 22MF 105
C1082	1-116-340-11	s	CAP, ELECT 22MF 105
C1083	1-116-340-11	s	CAP, ELECT 22MF 105
C1084	1-116-340-11	s	CAP, ELECT 22MF 105
C1091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1092	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1094	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1095	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1096	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1097	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1098	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1216	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1217	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1218	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1219	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1228	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C1229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1231	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C1232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1234	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C1251	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1252	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1253	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1254	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1255	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1256	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1257	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1258	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1259	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1260	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1261	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1262	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1263	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1264	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1265	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1266	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1267	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1268	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C1269	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C1270	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C1281	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1282	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1283	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1284	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1285	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1286	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1291	1-116-340-11	s	CAP, ELECT 22MF 105
C1292	1-116-340-11	s	CAP, ELECT 22MF 105
C1293	1-116-340-11	s	CAP, ELECT 22MF 105
C1294	1-116-340-11	s	CAP, ELECT 22MF 105
C1295	1-116-340-11	s	CAP, ELECT 22MF 105
C1296	1-116-340-11	s	CAP, ELECT 22MF 105
C2041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2050	1-116-099-11	s	CAP, ELECT 100MF 105
C2051	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2053	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2055	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C2056	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2062	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2064	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2070	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C2071	1-116-346-11	s	CAP, ELECT 47MF 105
C2072	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2074	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C2075	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2076	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C2077	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2078	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2079	1-164-937-81	s	CAP, CHIPCERAMIC 1000PF B 1005
C2080	1-114-167-21	s	CAP, ELECT 1200MF 105
C2091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2092	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2094	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2095	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2096	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2097	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2098	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2191	1-116-340-11	s	CAP, ELECT 22MF 105
C2192	1-116-340-11	s	CAP, ELECT 22MF 105
C2193	1-116-340-11	s	CAP, ELECT 22MF 105
C2194	1-116-340-11	s	CAP, ELECT 22MF 105
C2200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2400	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2401	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2402	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2403	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2404	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2405	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2406	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2407	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2408	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2409	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2410	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2411	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2412	1-116-340-11	s	CAP, ELECT 22MF 105
C2413	1-116-340-11	s	CAP, ELECT 22MF 105
C2414	1-116-340-11	s	CAP, ELECT 22MF 105
C2415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2424	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2425	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2426	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2427	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2428	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2429	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2430	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2431	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2432	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2433	1-164-933-81	s	CAP, CHIP CERAMIC 220PF B 1005
C2434	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C2435	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2436	1-116-340-11	s	CAP, ELECT 22MF 105
C2437	1-116-340-11	s	CAP, ELECT 22MF 105
C2438	1-116-340-11	s	CAP, ELECT 22MF 105
C2439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2442	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2444	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2446	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2447	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2448	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2450	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2452	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2454	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2456	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2458	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2460	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2462	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2464	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2465	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3012	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C3014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3022	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3026	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3201	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4006	1-116-346-11	s	CAP, ELECT 47MF 105
C4007	1-116-346-11	s	CAP, ELECT 47MF 105
C4008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4009	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C4010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4012	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4014	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C4015	1-107-823-91	s	CAP, CERAMIC 470000PF B (2012)
C4016	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C4017	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4022	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C4023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4024	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C4025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4026	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4027	1-164-868-81	s	CAP, CHIP CERAMIC 56PF CH 1005
C4028	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C4029	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4032	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4034	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C4035	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C4036	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C4037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4042	1-164-846-81	s	CAP, CHIP CERAMIC 6PF CH 1005
C4043	1-164-842-81	s	CAP,CHIP CERAMIC 2.0PF CK 1005
C4044	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C4045	1-164-864-81	s	CAP, CHIP CERAMIC 39PF CH 1005
C4046	1-115-412-91	s	CAP,CHIP CERAMIC 680PF CH 1608
C4047	1-115-412-91	s	CAP,CHIP CERAMIC 680PF CH 1608
C4048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4049	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4055	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C4056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4059	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4062	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4065	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4066	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4067	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4068	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C4069	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4070	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4071	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4075	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4079	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4083	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4090	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C4092	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C4093	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4180	1-116-346-11	s	CAP, ELECT 47MF 105
C4182	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C4183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4190	1-116-346-11	s	CAP, ELECT 47MF 105
C4192	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C4193	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C4194	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4195	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4196	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4197	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4198	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C4199	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C4200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4203	1-116-099-11	s	CAP, ELECT 100MF 105
C4204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4225	1-116-346-11	s	CAP, ELECT 47MF 105
C4226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4232	1-116-346-11	s	CAP, ELECT 47MF 105
C4233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4238	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4239	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4240	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C4241	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C4242	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4243	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C4244	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4245	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4250	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C4251	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4252	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4257	1-116-346-11	s	CAP, ELECT 47MF 105
C4258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4260	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4264	1-116-340-11	s	CAP, ELECT 22MF 105
C4265	1-116-340-11	s	CAP, ELECT 22MF 105

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4266	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4268	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4269	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4271	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C4272	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4274	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C4275	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C4276	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C4278	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C4279	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C4280	1-116-346-11	s	CAP, ELECT 47MF 105
C4281	1-116-346-11	s	CAP, ELECT 47MF 105
C4282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4283	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4285	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4286	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4288	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4289	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4291	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4292	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4294	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4295	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4296	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4297	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4298	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4299	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4350	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4360	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C4361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4362	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4382	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4390	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4391	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4392	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4393	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4394	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4395	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4396	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C4397	1-116-346-11	s	CAP, ELECT 47MF 105
C4400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4406	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C4411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4412	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4450	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C7090	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C7095	1-116-346-11	s	CAP, ELECT 47MF 105
C7101	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7102	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7110	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7112	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7114	1-135-810-21	s	CAP, CHIP FILM 270PF
C7115	1-135-810-21	s	CAP, CHIP FILM 270PF
C7119	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7120	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7122	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7124	1-135-810-21	s	CAP, CHIP FILM 270PF
C7125	1-135-810-21	s	CAP, CHIP FILM 270PF
C7129	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7132	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7133	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7142	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7143	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7145	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7152	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7153	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7155	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7156	1-116-117-11	s	CAP, ELECT 22MF 105
C7190	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7191	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7192	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7193	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7201	1-115-670-21	s	CAP, CHIP ELECT 220MF
C7202	1-115-670-21	s	CAP, CHIP ELECT 220MF

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7210	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7212	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7214	1-135-810-21	s	CAP, CHIP FILM 270PF
C7215	1-135-810-21	s	CAP, CHIP FILM 270PF
C7219	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7220	1-127-967-21	s	CAP, CHIP FILM 0.0022MF (2012)
C7222	1-127-968-21	s	CAP, CHIP FILM 0.0033MF (3216)
C7224	1-135-810-21	s	CAP, CHIP FILM 270PF
C7225	1-135-810-21	s	CAP, CHIP FILM 270PF
C7229	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7232	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7233	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7242	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7243	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7245	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7252	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7253	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7255	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C7290	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7291	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7292	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7293	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7310	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7311	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7312	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7313	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7320	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7321	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7322	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7323	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7350	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7351	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7352	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7360	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7361	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7362	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7410	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7411	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7412	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7413	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7420	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7421	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C7422	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7423	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C7450	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7451	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7452	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7460	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7461	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7462	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7500	1-116-340-11	s	CAP, ELECT 22MF 105
C7501	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C7700	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7701	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7810	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7811	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7820	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7821	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7840	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C7841	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7850	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7851	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7910	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7911	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7920	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7921	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7940	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7941	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7950	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C7951	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C8003	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C8004	1-127-959-21	s	CAP, CHIP FILM 100PF (2012)
C8005	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C8006	1-127-974-21	s	CAP, CHIP FILM 0.033MF (3225)
C8007	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C8008	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C8009	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C8010	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C8011	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C8050	1-116-340-11	s	CAP, ELECT 22MF 105
C8051	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C8090	1-116-118-11	s	CAP, ELECT 47MF 105
C8091	1-116-118-11	s	CAP, ELECT 47MF 105
C9000	1-116-346-11	s	CAP, ELECT 47MF 105
C9001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9012	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C9013	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C9014	1-116-346-11	s	CAP, ELECT 47MF 105
C9015	1-116-346-11	s	CAP, ELECT 47MF 105
C9016	1-116-346-11	s	CAP, ELECT 47MF 105
C9017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9090	1-116-411-11	s	CAP, AL SOLID ELECT 10MF 105
C9091	1-116-346-11	s	CAP, ELECT 47MF 105
C9101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
D300	8-719-820-42	s	DIODE 1SS302-TE85L
D301	8-719-820-42	s	DIODE 1SS302-TE85L
D850	6-501-124-01	s	DIODE RSX101VA-30TR
D851	6-501-124-01	s	DIODE RSX101VA-30TR
D1070	6-501-124-01	s	DIODE RSX101VA-30TR

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1071	6-501-124-01	s	DIODE RSX101VA-30TR
D1202	8-719-077-09	s	DIODE CL-196HR-CD-T
D1203	8-719-074-31	s	DIODE CL-196YG-CD-T
D1204	8-719-074-31	s	DIODE CL-196YG-CD-T
D1205	8-719-074-31	s	DIODE CL-196YG-CD-T
D2070	6-501-124-01	s	DIODE RSX101VA-30TR
D2071	6-501-124-01	s	DIODE RSX101VA-30TR
D2200	8-719-074-31	s	DIODE CL-196YG-CD-T
D2201	8-719-074-31	s	DIODE CL-196YG-CD-T
D4000	8-719-989-01	s	DIODE DA221-TL
D4001	8-719-069-28	s	DI 1SS400FJTE61
D4090	6-501-124-01	s	DIODE RSX101VA-30TR
D4091	6-501-124-01	s	DIODE RSX101VA-30TR
D4092	6-501-124-01	s	DIODE RSX101VA-30TR
D4093	6-501-124-01	s	DIODE RSX101VA-30TR
D4200	6-501-124-01	s	DIODE RSX101VA-30TR
D4201	6-501-124-01	s	DIODE RSX101VA-30TR
D4390	6-501-124-01	s	DIODE RSX101VA-30TR
D4391	6-501-124-01	s	DIODE RSX101VA-30TR
D4392	6-501-124-01	s	DIODE RSX101VA-30TR
D4393	6-501-124-01	s	DIODE RSX101VA-30TR
D4394	6-501-124-01	s	DIODE RSX101VA-30TR
D4395	6-501-124-01	s	DIODE RSX101VA-30TR
D7090	6-501-124-01	s	DIODE RSX101VA-30TR
D7091	6-501-124-01	s	DIODE RSX101VA-30TR
D7100	8-719-051-07	s	DIODE EC10DS2-TE12L5
D7101	8-719-820-42	s	DIODE 1SS302-TE85L
D7102	8-719-820-42	s	DIODE 1SS302-TE85L
D7135	8-719-820-42	s	DIODE 1SS302-TE85L
D7200	8-719-051-07	s	DIODE EC10DS2-TE12L5
D7201	8-719-820-42	s	DIODE 1SS302-TE85L
D7202	8-719-820-42	s	DIODE 1SS302-TE85L
D7235	8-719-820-42	s	DIODE 1SS302-TE85L
D7310	8-719-820-42	s	DIODE 1SS302-TE85L
D7311	8-719-820-42	s	DIODE 1SS302-TE85L
D7320	8-719-820-42	s	DIODE 1SS302-TE85L
D7321	8-719-820-42	s	DIODE 1SS302-TE85L
D7410	8-719-820-42	s	DIODE 1SS302-TE85L
D7411	8-719-820-42	s	DIODE 1SS302-TE85L
D7420	8-719-820-42	s	DIODE 1SS302-TE85L
D7421	8-719-820-42	s	DIODE 1SS302-TE85L
D7500	6-501-124-01	s	DIODE RSX101VA-30TR
D7501	6-501-124-01	s	DIODE RSX101VA-30TR
D8000	8-719-820-42	s	DIODE 1SS302-TE85L
D8001	8-719-820-42	s	DIODE 1SS302-TE85L
D8002	8-719-820-42	s	DIODE 1SS302-TE85L
D8050	6-501-124-01	s	DIODE RSX101VA-30TR
D8051	6-501-124-01	s	DIODE RSX101VA-30TR
D9090	6-501-124-01	s	DIODE RSX101VA-30TR
D9091	6-501-124-01	s	DIODE RSX101VA-30TR
E101	1-535-877-22	s	CHIP, CHECKER
E200	1-535-877-22	s	CHIP, CHECKER
E300	1-535-877-22	s	CHIP, CHECKER
E501	1-535-877-22	s	CHIP, CHECKER
E502	1-535-877-22	s	CHIP, CHECKER
E801	1-535-877-22	s	CHIP, CHECKER
E802	1-535-877-22	s	CHIP, CHECKER
E803	1-535-877-22	s	CHIP, CHECKER
E1001	1-535-877-22	s	CHIP, CHECKER

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E1002	1-535-877-22	s	CHIP, CHECKER
E1004	1-535-877-22	s	CHIP, CHECKER
E1005	1-535-877-22	s	CHIP, CHECKER
E2001	1-535-877-22	s	CHIP, CHECKER
E2002	1-535-877-22	s	CHIP, CHECKER
E2003	1-535-877-22	s	CHIP, CHECKER
E2004	1-535-877-22	s	CHIP, CHECKER
E2005	1-535-877-22	s	CHIP, CHECKER
E3000	1-535-877-22	s	CHIP, CHECKER
E3001	1-535-877-22	s	CHIP, CHECKER
E3002	1-535-877-22	s	CHIP, CHECKER
E4000	1-535-877-22	s	CHIP, CHECKER
E4001	1-535-877-22	s	CHIP, CHECKER
E4190	1-535-877-22	s	CHIP, CHECKER
E4203	1-535-877-22	s	CHIP, CHECKER
E4211	1-535-877-22	s	CHIP, CHECKER
E4212	1-535-877-22	s	CHIP, CHECKER
E4290	1-535-877-22	s	CHIP, CHECKER
E4370	1-535-877-22	s	CHIP, CHECKER
E4400	1-535-877-22	s	CHIP, CHECKER
E4401	1-535-877-22	s	CHIP, CHECKER
E4402	1-535-877-22	s	CHIP, CHECKER
E4403	1-535-877-22	s	CHIP, CHECKER
E4407	1-535-877-22	s	CHIP, CHECKER
E4408	1-535-877-22	s	CHIP, CHECKER
E4450	1-535-877-22	s	CHIP, CHECKER
E7100	1-535-877-22	s	CHIP, CHECKER
E7131	1-535-877-22	s	CHIP, CHECKER
E7200	1-535-877-22	s	CHIP, CHECKER
E7231	1-535-877-22	s	CHIP, CHECKER
E8001	1-535-877-22	s	CHIP, CHECKER
E9001	1-535-877-22	s	CHIP, CHECKER
E9002	1-535-877-22	s	CHIP, CHECKER
E9003	1-535-877-22	s	CHIP, CHECKER
E9004	1-535-877-22	s	CHIP, CHECKER
E9005	1-535-877-22	s	CHIP, CHECKER
F101	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F102	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F105	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F106	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F401	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F402	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F403	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
FB802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB803	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1050	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2050	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB3000	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4000	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4200	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4201	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4202	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4203	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4204	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4205	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4206	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4207	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4208	1-400-462-21	s	FERRITE, EMI (SMD) (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB4209	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4210	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4350	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4360	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4400	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4401	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4402	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4450	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FL4000	1-233-892-21	s	FILTER, LOW PASS
IC200	6-701-572-01	s	IC TPS54610PWPR
IC300	6-704-161-01	s	IC S-80840CNUA-B8ZT2G
IC301	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC302	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC500	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC501	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC502	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC503	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC504	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC505	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC506	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC507	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC805	6-709-647-01	s	IC TLC2932AIPWR
IC806	6-709-647-01	s	IC TLC2932AIPWR
IC810	8-759-598-35	s	IC NJM2119M(TE2)
IC811	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC812	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC813	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC814	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC815	8-759-598-35	s	IC NJM2119M(TE2)
IC816	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC817	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC818	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC819	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC850	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC1001	8-759-392-77	s	IC SN74LVC245APWR
IC1002	8-759-392-77	s	IC SN74LVC245APWR
IC1003	8-759-392-77	s	IC SN74LVC245APWR
IC1004	8-759-392-77	s	IC SN74LVC245APWR
IC1005	8-759-392-77	s	IC SN74LVC245APWR
IC1006	8-759-392-77	s	IC SN74LVC245APWR
IC1007	8-759-392-77	s	IC SN74LVC245APWR
IC1008	8-759-392-77	s	IC SN74LVC245APWR
IC1009	8-759-392-77	s	IC SN74LVC245APWR
IC1070	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC1200	6-707-096-01	s	IC AK4124VF-E2
IC1201	6-707-096-01	s	IC AK4124VF-E2
IC1202	6-707-096-01	s	IC AK4124VF-E2
IC1203	6-707-096-01	s	IC AK4124VF-E2
IC1205	6-707-096-01	s	IC AK4124VF-E2
IC1206	6-707-096-01	s	IC AK4124VF-E2
IC1207	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC1208	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC1209	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2070	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC2200	8-759-392-77	s	IC SN74LVC245APWR
IC2201	8-759-392-77	s	IC SN74LVC245APWR
IC2203	8-759-392-77	s	IC SN74LVC245APWR
IC2204	8-759-392-77	s	IC SN74LVC245APWR

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC2205	8-759-392-77	s	IC SN74LVC245APWR
IC2206	8-759-392-77	s	IC SN74LVC245APWR
IC2207	8-759-639-85	s	IC SN65LVDS31DR
IC2208	8-759-639-85	s	IC SN65LVDS31DR
IC2209	8-759-639-85	s	IC SN65LVDS31DR
IC2400	6-707-096-01	s	IC AK4124VF-E2
IC2401	6-707-096-01	s	IC AK4124VF-E2
IC2402	6-707-096-01	s	IC AK4124VF-E2
IC2403	6-707-096-01	s	IC AK4124VF-E2
IC2404	6-707-096-01	s	IC AK4124VF-E2
IC2405	6-707-096-01	s	IC AK4124VF-E2
IC2406	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2407	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2408	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2409	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2410	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2411	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2412	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2413	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC2414	6-706-949-01	s	IC IDT71V416S12PHG-TL
IC3001	8-759-669-43	s	IC SN74LVC157APWR-12
IC3002	6-708-277-01	s	IC CDCVF25081PWR
IC3003	8-759-392-77	s	IC SN74LVC245APWR
IC3004	8-759-392-77	s	IC SN74LVC245APWR
IC3005	8-759-392-77	s	IC SN74LVC245APWR
IC3006	8-759-392-77	s	IC SN74LVC245APWR
IC3007	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3008	8-759-669-43	s	IC SN74LVC157APWR-12
IC3009	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC3010	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC3011	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC3013	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3014	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC3200	6-714-365-01	s	IC MX29LV640EBTI-70G
IC4000	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4001	8-759-398-57	s	IC LM1881MX NOPB
IC4002	8-759-398-57	s	IC LM1881MX NOPB
IC4003	6-701-453-01	s	IC SN75207BNSR
IC4004	8-759-394-70	s	IC NJM360M-TE2
IC4005	8-759-394-70	s	IC NJM360M-TE2
IC4006	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC4007	6-700-804-01	s	IC SN74LVC574APWR
IC4008	8-752-391-99	s	IC CXD2315Q-T4
IC4009	8-752-066-19	s	IC CXA1432M-T4
IC4010	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC4011	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4012	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4013	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4014	6-707-882-01	o	IC TC74VHC74FT(EKJ)
IC4015	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4016	8-759-669-73	s	IC TL082CPWR
IC4017	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC4018	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC4019	8-759-287-55	s	IC TC7S66FU(TE85R)
IC4020	8-759-669-73	s	IC TL082CPWR
IC4021	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4022	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC4023	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC4024	8-759-573-91	s	IC AD8055ARTZ-REEL7

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC4025	6-700-804-01	s	IC SN74LVC574APWR
IC4026	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC4091	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC4092	6-704-155-01	s	IC UCC384DPTR-5
IC4190	6-701-572-01	s	IC TPS54610PWPR
IC4201	8-759-573-97	s	IC SN74LVC541APWR
IC4203	6-709-647-01	s	IC TLC2932AIPWR
IC4204	8-759-183-53	s	IC TL431CPK-E2
IC4205	6-709-647-01	s	IC TLC2932AIPWR
IC4206	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC4207	6-709-647-01	s	IC TLC2932AIPWR
IC4208	6-709-647-01	s	IC TLC2932AIPWR
IC4211	8-759-669-73	s	IC TL082CPWR
IC4212	8-759-669-73	s	IC TL082CPWR
IC4213	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4214	8-759-669-73	s	IC TL082CPWR
IC4216	8-759-669-73	s	IC TL082CPWR
IC4218	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4220	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC4221	8-759-669-73	s	IC TL082CPWR
IC4222	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4223	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4291	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4292	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4293	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4350	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4351	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4352	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC4353	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4360	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4361	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC4362	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC4363	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC4391	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC4392	6-704-155-01	s	IC UCC384DPTR-5
IC4394	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC4401	6-708-277-01	s	IC CDCVF25081PWR
IC4402	6-708-277-01	s	IC CDCVF25081PWR
IC4403	8-759-573-97	s	IC SN74LVC541APWR
IC4404	8-759-573-97	s	IC SN74LVC541APWR
IC4405	8-759-573-97	s	IC SN74LVC541APWR
IC4407	8-759-573-97	s	IC SN74LVC541APWR
IC4408	6-700-804-01	s	IC SN74LVC574APWR
IC4409	8-759-573-97	s	IC SN74LVC541APWR
IC4410	8-759-573-97	s	IC SN74LVC541APWR
IC4411	8-759-573-97	s	IC SN74LVC541APWR
IC4412	6-708-277-01	s	IC CDCVF25081PWR
IC4413	8-759-689-09	s	IC SN65LVDT2DBVR
IC4414	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4415	8-759-689-09	s	IC SN65LVDT2DBVR
IC4416	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC4417	8-759-683-80	s	IC SN65LVDS1DBVR
IC4418	8-759-683-80	s	IC SN65LVDS1DBVR
IC4419	8-759-683-80	s	IC SN65LVDS1DBVR
IC4420	8-759-683-80	s	IC SN65LVDS1DBVR
IC4421	8-759-683-80	s	IC SN65LVDS1DBVR
IC4422	8-759-683-80	s	IC SN65LVDS1DBVR
IC4423	8-759-683-80	s	IC SN65LVDS1DBVR
IC4424	8-759-683-80	s	IC SN65LVDS1DBVR

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC4425	6-700-804-01	s	IC SN74LVC574APWR
IC4426	8-759-573-97	s	IC SN74LVC541APWR
IC4427	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC4428	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC4450	6-708-277-01	s	IC CDCVF25081PWR
IC4451	6-700-804-01	s	IC SN74LVC574APWR
IC4452	8-759-669-43	s	IC SN74LVC157APWR-12
IC4455	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC7091	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC7101	6-711-882-01	s	IC AK4396VF-E2
IC7110	8-759-394-77	s	IC NJM5534M(TE2)
IC7120	8-759-394-77	s	IC NJM5534M(TE2)
IC7140	8-759-394-77	s	IC NJM5534M(TE2)
IC7150	8-759-394-77	s	IC NJM5534M(TE2)
IC7201	6-711-882-01	s	IC AK4396VF-E2
IC7210	8-759-394-77	s	IC NJM5534M(TE2)
IC7220	8-759-394-77	s	IC NJM5534M(TE2)
IC7240	8-759-394-77	s	IC NJM5534M(TE2)
IC7250	8-759-394-77	s	IC NJM5534M(TE2)
IC7311	6-701-691-01	s	IC AK5355VT-E2
IC7321	6-701-691-01	s	IC AK5355VT-E2
IC7411	6-701-691-01	s	IC AK5355VT-E2
IC7421	6-701-691-01	s	IC AK5355VT-E2
IC7500	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC7700	8-759-394-74	s	IC NJM4580E-D-TE2
IC8000	6-701-691-01	s	IC AK5355VT-E2
IC8002	8-759-394-74	s	IC NJM4580E-D-TE2
IC8050	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC9000	6-709-647-01	s	IC TLC2932AIPWR
IC9001	6-711-759-01	s	IC SM5819AF-G
IC9002	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9003	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9004	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9005	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC9006	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC9007	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC9090	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC9101	6-711-759-01	s	IC SM5819AF-G
L101	1-419-630-21	s	COIL, CHOKE 4.7UH
L103	1-416-344-21	s	COIL, CHOKE 10UH
L106	1-416-345-21	s	COIL, CHOKE 22UH
L107	1-416-345-21	s	COIL, CHOKE 22UH
L220	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L401	1-419-630-21	s	COIL, CHOKE 4.7UH
L402	1-416-344-21	s	COIL, CHOKE 10UH
L500	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L800	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L801	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1291	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1292	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1293	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1294	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1295	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L1296	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2400	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2401	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2402	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2403	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L2404	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2405	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4002	1-481-587-21	s	INDUCTOR, CHIP 6.8UH
L4003	1-481-601-21	s	INDUCTOR, CHIP 100UH
L4004	1-481-593-21	s	INDUCTOR, CHIP 22UH
L4005	1-481-595-21	s	INDUCTOR, CHIP 33UH
L4190	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L7095	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L7150	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L7250	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L8090	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L8091	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9000	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9001	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9002	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L9003	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q300	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q301	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q302	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q303	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q304	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q305	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q306	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q4000	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4001	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4002	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q4003	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4004	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q4005	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q4006	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q4007	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q4008	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q4200	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q4201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4202	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q7000	6-551-285-01	s	TRANSISTOR SI6925ADQ-T1
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-245-856-11	s	RES, METAL FILM(SMD) 15K(1608)
R221	1-245-856-11	s	RES, METAL FILM(SMD) 15K(1608)
R222	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R223	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R224	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R225	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R226	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R227	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R228	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R229	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R300	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R302	1-245-908-11	s	RES, METAL FILM(SMD)330K(1608)
R303	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R304	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R305	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R306	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R307	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R308	1-245-851-11	s	RES, METAL FILM(SMD)9.1K(1608)
R309	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R311	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R313	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R314	1-245-856-11	s	RES, METAL FILM(SMD) 15K(1608)
R315	1-245-900-11	s	RES, METAL FILM(SMD)150K(1608)
R316	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R317	1-245-772-11	s	RES, METAL FILM(SMD) 220(1608)
R500	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R501	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R502	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R503	1-245-792-11	s	RES, METAL FILM(SMD) 220(1005)
R504	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R505	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R506	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R507	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R508	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R509	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R510	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R511	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R512	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R800	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R801	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R802	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R803	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R804	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R805	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R806	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R807	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R808	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R809	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R810	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R811	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R1000	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1001	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1002	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1003	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1004	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1005	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1006	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1007	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1008	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1009	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1010	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1011	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1012	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1013	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1014	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1015	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1016	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1017	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1018	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1019	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1020	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1021	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1022	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1023	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1025	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1026	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1027	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1028	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1030	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1031	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1032	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1033	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1034	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1035	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1036	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1037	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1038	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1039	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1040	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1041	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1042	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1043	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1044	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1045	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1046	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1047	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1048	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1049	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1050	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1051	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1052	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1053	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1054	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1055	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1056	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1057	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1058	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1059	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1060	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1061	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1062	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1063	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1064	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1065	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1066	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1067	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1068	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1069	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1070	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1071	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1072	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1073	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1074	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1075	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1076	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1077	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1078	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1079	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1080	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1081	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1082	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1083	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1084	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1085	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1086	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1087	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1088	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1089	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1090	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1091	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1092	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1093	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1094	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1095	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1096	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1097	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1098	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1099	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1100	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1101	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1102	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1103	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1104	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1105	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1106	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1107	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1108	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1109	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1110	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1111	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1112	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1113	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1114	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1115	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1116	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1117	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1118	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1119	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1120	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1121	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1122	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1123	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1124	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1125	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1126	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1127	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1128	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1129	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1130	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1131	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1132	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1133	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1134	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1135	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1136	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1137	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1138	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1139	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1140	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1141	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1142	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1143	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1144	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1145	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1146	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1147	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1148	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1149	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1150	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1151	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1152	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1153	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1154	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1155	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1156	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1157	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1158	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1159	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1160	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1161	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1162	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1163	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1164	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1165	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1166	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1167	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1168	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1169	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1170	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1171	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1172	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1173	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1174	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1175	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1176	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1178	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1179	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1180	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1181	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1182	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1183	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1184	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1185	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1187	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1188	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1189	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1190	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1191	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1192	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1193	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1194	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1195	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1196	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1197	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1198	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1199	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1200	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1201	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1202	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1203	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1204	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1205	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1206	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1207	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1208	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1209	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1210	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1211	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1212	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1214	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1216	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1218	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1220	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1222	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1224	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1226	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1227	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1229	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1231	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1234	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1235	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1238	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1239	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1242	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1244	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1246	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1247	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1250	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1252	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1254	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1255	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1258	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1260	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1261	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1262	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1263	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1264	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1265	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1266	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1267	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1268	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1269	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1270	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1271	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1272	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1273	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1274	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1275	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1276	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1277	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1278	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1279	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1280	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1281	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1282	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1283	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1284	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1285	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1291	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1292	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1293	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1294	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1295	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1296	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1297	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1298	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1299	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1300	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1301	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R1302	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R1303	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R1304	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1305	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1306	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1307	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1400	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1401	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1402	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1403	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1404	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1405	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1406	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1407	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1408	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1409	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1410	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1411	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1412	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1413	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1414	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1415	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1416	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1417	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1418	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1419	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1420	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1421	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1422	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1423	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1424	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1425	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1426	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1427	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1428	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1429	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1430	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1431	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1432	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1433	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1434	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1435	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1436	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1437	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1438	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1439	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1440	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1441	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1442	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1443	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1444	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1445	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1446	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1447	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1448	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1449	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1450	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1451	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1452	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1453	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1454	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1455	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1456	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1457	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1458	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1459	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1460	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1461	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1462	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1463	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1464	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1465	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1466	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1467	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1468	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1469	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1470	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1471	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1472	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1473	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1474	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1475	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1476	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1477	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1478	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1479	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1480	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1481	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1482	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1483	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1484	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1485	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1486	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1487	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1488	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1489	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1490	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1491	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1492	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1493	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1494	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1495	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1496	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1497	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1498	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1499	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1500	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1501	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1502	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1503	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1504	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1505	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1506	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1507	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1508	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1509	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1510	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1511	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1512	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1513	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1514	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1515	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1516	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1517	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1518	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1519	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1520	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1521	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1522	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1523	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1524	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1525	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1526	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1527	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1528	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1529	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1530	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1531	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1532	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1533	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1534	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1535	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1536	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1537	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1538	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1539	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1540	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1541	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1542	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1543	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1544	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1545	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1546	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1547	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1548	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1549	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1550	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1551	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1552	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1553	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1554	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1555	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1556	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1557	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1558	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1559	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1560	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1561	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1562	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1563	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1564	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1565	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1566	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1567	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1568	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1569	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1570	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1571	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1572	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1573	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1574	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1575	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1576	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1577	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1578	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1579	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1580	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1581	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1582	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R1583	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1584	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1585	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1586	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1587	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1588	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1589	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1590	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1591	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1592	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1593	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1594	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1595	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1596	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1597	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1598	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1599	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1600	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1601	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1602	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1603	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1604	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1605	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1606	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1607	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1608	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1609	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1610	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1611	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1612	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1613	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1614	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1615	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1616	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1617	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1618	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1619	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1620	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1621	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1622	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1623	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1624	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1625	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1626	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1627	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1628	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1629	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1630	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1631	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1632	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1633	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1634	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1635	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1636	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1637	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1638	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1639	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1640	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1641	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1642	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1643	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1644	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1645	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1646	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1647	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1648	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1649	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1650	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1651	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1652	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1653	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1654	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1655	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1656	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1657	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1658	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1659	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1660	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1661	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1662	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1663	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1664	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1665	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1666	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1667	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1668	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1669	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1670	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1671	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1672	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1673	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1674	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1675	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1676	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1677	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1678	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1679	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1680	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1681	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1682	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1683	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1684	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1685	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1686	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1687	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1688	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1689	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1690	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1691	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1692	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1693	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1694	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1695	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1696	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1697	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1698	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1699	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1700	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1701	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1702	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1703	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1704	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1705	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1706	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1707	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1708	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1709	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1710	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1711	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1712	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1713	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1714	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1715	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1716	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1717	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1718	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1719	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1720	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1721	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1722	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1723	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1724	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1725	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1726	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1727	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1728	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1729	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1730	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1731	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1732	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1733	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1734	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1735	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1736	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1737	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1738	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1739	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1740	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1741	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1742	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1743	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1744	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1745	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1746	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1747	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1748	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1749	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1750	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1751	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1752	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1753	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1754	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1755	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1756	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1757	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1758	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1759	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1760	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1761	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1762	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1763	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1764	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1765	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1766	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1767	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1768	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1769	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1770	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1771	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1772	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1773	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1774	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1775	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1776	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1777	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1778	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1779	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1780	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1781	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1782	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1783	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1784	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1785	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1786	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1787	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1788	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1789	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1790	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1791	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1792	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1793	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1794	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1795	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1796	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1797	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1798	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1799	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1800	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1801	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1802	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1803	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1804	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1805	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1806	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1807	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1808	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1809	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1810	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1811	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1812	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1813	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1814	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1815	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1816	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1817	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1818	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1819	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1820	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1821	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1822	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1823	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1824	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1825	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1826	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1827	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1828	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1829	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1830	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1831	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1832	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1833	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1834	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1835	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1836	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1837	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1838	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1839	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R1840	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1841	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1842	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1843	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1844	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1845	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1846	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1847	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1848	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1849	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1850	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1851	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1852	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1853	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1854	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1855	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1856	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1857	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1858	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1859	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1860	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1861	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1862	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1863	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1864	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1865	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1866	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1867	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1868	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1869	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1870	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1871	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1872	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1873	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1874	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1875	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1876	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1877	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1878	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1879	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1880	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1881	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1882	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1883	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1884	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1885	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1886	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1887	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1888	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1889	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1890	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R1891	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1892	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1893	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1894	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1895	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1896	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1897	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1898	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1899	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1900	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1901	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1902	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1903	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1904	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1905	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1906	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1907	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R1908	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1909	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1910	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1911	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1912	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1913	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1914	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1915	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1916	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1917	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1918	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R1919	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1920	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R1921	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2031	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2032	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2033	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2034	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2035	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2036	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2037	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2038	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2039	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2041	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2042	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2050	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2051	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2052	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2094	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2095	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2096	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2097	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2200	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2201	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2202	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2203	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2204	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2205	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2206	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2207	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2208	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2209	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2210	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2211	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2212	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2213	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2214	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2215	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2216	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2217	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2218	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2219	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R2220	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2221	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2223	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2224	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2225	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2226	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2227	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2229	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2230	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2231	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2232	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2233	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2234	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2235	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2236	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2237	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2238	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2239	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2240	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2241	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2242	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2243	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2244	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2245	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2246	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2247	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2248	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2249	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2250	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2251	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2252	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2253	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2254	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2255	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2256	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2257	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2258	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2259	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2260	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2261	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R2262	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R2263	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R2264	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R2265	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2266	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2267	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2268	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2269	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2270	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2271	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2272	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2273	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2274	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2275	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2276	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2277	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2278	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2279	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2280	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2281	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2282	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2283	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2284	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2285	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2286	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2287	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2288	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2289	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2290	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2291	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2292	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2293	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2294	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2295	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2296	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2297	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2298	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2301	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2302	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2303	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2304	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2305	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2306	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2307	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2308	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2309	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2310	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2311	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2312	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2313	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2314	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2315	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2316	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2317	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2318	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2319	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2320	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2321	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2322	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2323	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2324	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2325	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2326	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2327	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2328	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2329	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2330	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2331	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2332	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2333	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2334	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2335	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2336	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2337	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2338	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2339	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2340	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2341	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2342	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2343	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2344	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2345	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2346	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2350	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2351	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2352	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2353	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2354	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2367	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2368	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2369	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2370	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2372	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2375	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2380	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2381	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2382	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2383	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2384	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2385	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2390	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2391	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2392	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2393	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2394	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2395	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2396	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2397	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2398	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2399	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2400	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2401	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2402	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2403	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2404	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2405	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2406	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2407	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2408	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2410	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2411	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2412	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2413	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2414	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2415	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2416	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2417	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2418	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2419	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2420	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2421	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2422	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2423	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2424	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2425	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2426	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2430	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2431	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2432	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2433	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2434	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2435	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2457	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2458	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2459	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2460	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2461	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2462	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2463	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2464	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2465	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2466	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2467	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2468	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2469	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2470	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2471	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2472	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2473	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2474	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2475	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2476	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2477	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2478	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2479	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2480	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2481	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2482	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2483	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2484	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2485	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2486	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2487	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2488	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2489	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2490	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2491	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2492	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2493	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2494	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2495	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2496	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2497	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2498	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2499	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2500	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2501	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2502	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2503	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2504	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2505	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2506	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2507	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2508	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2509	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2510	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2511	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2512	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2513	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2514	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2515	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2516	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2517	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2518	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2519	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2520	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2521	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2522	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2523	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R2524	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2525	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2526	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2527	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2528	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2529	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2530	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2531	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2532	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2533	1-245-832-11	s	RES, METAL FILM(SMD)1.5K(1005)
R2534	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2535	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2536	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2537	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2538	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2539	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2540	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2541	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2542	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2543	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2544	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2545	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2546	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2547	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2548	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2549	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2550	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2551	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2552	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2553	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2554	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2555	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2556	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2557	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2558	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2559	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2560	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2561	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2562	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2563	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2564	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2565	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2566	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2567	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2568	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R2569	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2570	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2571	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2572	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2573	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2574	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2575	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2576	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2577	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2578	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2579	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2580	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2581	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2582	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2583	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2584	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2585	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2586	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2587	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2588	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2589	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2590	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2591	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2592	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2593	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2594	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2595	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2596	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2597	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2598	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2599	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2600	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2601	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2602	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2603	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2604	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2605	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2606	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2607	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2608	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2609	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2610	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2611	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2612	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2613	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2614	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2615	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2616	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2617	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2618	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2619	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2620	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2621	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2622	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2623	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2624	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2625	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2626	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2627	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2628	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2629	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2630	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2631	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2632	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2633	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2634	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2635	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2636	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2637	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2638	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2639	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2640	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2641	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2642	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2643	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2644	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2645	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2646	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2647	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2648	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2649	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2650	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2651	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2652	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2653	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2654	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2655	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2656	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2657	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2658	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2659	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2660	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2661	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2662	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2663	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2664	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2665	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2666	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2667	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2668	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2669	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2670	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2671	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2672	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2673	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2674	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2675	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2676	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2677	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2678	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2679	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2680	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2681	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2682	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2683	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2684	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2685	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2686	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2687	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2688	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2689	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2690	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2691	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2692	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2693	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2694	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2695	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2696	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2697	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2698	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2699	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2700	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2701	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2702	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2703	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2704	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2705	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2706	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2707	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2708	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2709	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2710	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2711	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2712	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2713	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2714	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2715	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2716	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2717	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2718	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2719	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2720	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2721	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2722	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2723	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2724	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2725	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2726	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2727	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2728	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2729	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2730	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2731	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2732	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2733	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2734	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2735	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2736	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2737	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2738	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2739	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2740	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2741	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2742	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2743	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2744	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2745	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2746	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2747	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2748	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2749	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2750	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2751	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2752	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2753	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2754	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2755	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2756	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2757	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2758	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2759	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2760	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2761	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2762	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2763	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2764	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2765	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2766	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2767	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2768	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2769	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2770	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2771	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2772	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2773	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2774	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2775	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2776	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2777	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2778	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2779	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2780	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2781	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2782	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2783	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2784	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2785	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2786	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2787	1-218-941-81	s	RES, CHIP 100
R2788	1-218-941-81	s	RES, CHIP 100
R2789	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2790	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2791	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2792	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2793	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2794	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2795	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2796	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2797	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2798	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2799	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2800	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2801	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2802	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2803	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2804	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2805	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2806	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2807	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2808	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2809	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2810	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2811	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2812	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2813	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2814	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2815	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2816	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2817	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2818	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2819	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2820	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2821	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2822	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2823	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2824	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2825	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2826	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2827	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2828	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2829	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2830	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2831	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2832	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2833	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2834	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2835	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2836	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2837	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2838	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2839	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2840	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2841	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2842	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2843	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2844	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2845	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2846	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2847	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2848	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2849	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2850	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2851	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2852	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2853	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2854	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2855	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2856	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2857	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2858	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2859	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2860	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R2861	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2862	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2863	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2864	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2865	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2866	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2867	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2868	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2869	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2870	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2871	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2872	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2873	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2874	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2875	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2876	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2877	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2878	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2879	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2880	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2881	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2882	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2883	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2884	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2885	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2886	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2887	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2888	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2889	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2890	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2891	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2892	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2893	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2894	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2895	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2896	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2897	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2898	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2899	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2900	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2901	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2902	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2903	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2904	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2905	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2906	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2907	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2908	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2909	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2910	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2911	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2912	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2913	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2914	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2915	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2916	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2917	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2918	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2919	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2920	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2921	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2922	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2923	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2924	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2925	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2926	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2927	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2928	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2929	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2930	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2931	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2932	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2933	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2934	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2935	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2936	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2937	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2938	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2939	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2940	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2941	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2942	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2943	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2944	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2945	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2946	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2947	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2948	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2949	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2950	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2951	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2952	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2953	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2954	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2955	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2956	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2957	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2958	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2959	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2960	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2961	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2962	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2963	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2964	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2965	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2966	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2967	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2968	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2969	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2970	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2971	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2972	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2973	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2974	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2975	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2976	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2977	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R2978	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2979	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2980	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2981	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2982	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2983	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2984	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2985	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2986	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2987	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2988	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2989	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2990	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2991	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2992	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2993	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2994	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2995	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2996	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R2998	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2999	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3000	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3001	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3002	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3003	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3004	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3005	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3006	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3007	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3008	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3009	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3010	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3011	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3012	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3013	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3014	1-245-820-11	s	RES, METAL FILM(SMD) 470(1005)
R3015	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3016	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3017	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3018	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3019	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3020	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3021	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3022	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3023	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3025	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3026	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3027	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3028	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3030	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3031	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3032	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3033	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3034	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3035	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3036	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3037	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3038	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3039	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3040	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3041	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3042	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3043	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3044	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3045	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3046	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3047	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3048	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3049	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3050	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3051	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3052	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3053	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3054	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3055	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3056	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3057	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3058	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3059	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3060	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3061	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3062	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3063	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3064	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3065	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3066	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3067	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3068	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3069	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3070	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3071	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3072	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3073	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3074	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3075	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3076	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3077	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3078	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3079	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3080	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3081	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3082	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3083	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3084	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3085	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3086	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3087	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3088	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3089	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3090	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3091	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3092	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3093	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3094	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3095	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3096	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3097	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3098	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3099	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3100	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3101	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3102	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3103	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3104	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3105	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3106	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3107	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3108	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3109	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3110	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3111	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3112	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3113	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3114	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3115	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3116	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3117	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3118	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3119	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3120	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3121	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3122	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3123	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3124	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3125	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3126	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3127	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3128	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3129	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3130	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3131	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3132	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3133	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3134	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3135	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3136	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3137	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3138	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3139	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3140	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3141	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3142	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3143	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3144	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3145	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3146	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3147	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3148	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3149	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3150	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3152	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3153	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3154	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3156	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3158	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3159	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3160	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3161	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3162	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3163	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3164	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R3165	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3167	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3168	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R3169	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3170	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R3171	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R3172	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3173	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3174	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3175	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3176	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3177	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3178	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3179	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3180	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3181	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3187	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3190	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3191	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3192	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R3199	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3202	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3204	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3208	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3214	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3247	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3248	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3249	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3250	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R3251	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3252	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3260	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3261	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3263	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3264	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3265	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3268	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3269	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3270	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3273	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3275	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3276	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R3277	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3278	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3279	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3280	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R3281	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4000	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4001	1-245-728-11	s	RES, METAL FILM(SMD) 22 (1608)
R4002	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R4003	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R4004	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4005	1-245-773-11	s	RES, METAL FILM(SMD) 240(1608)
R4006	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4008	1-245-817-11	s	RES, METAL FILM(SMD)2.4K(1608)
R4009	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4010	1-245-736-11	s	RES, METAL FILM(SMD) 47 (1608)
R4011	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4012	1-245-806-11	s	RES, METAL FILM(SMD) 820(1608)
R4013	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4014	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4015	1-245-846-11	s	RES, METAL FILM(SMD)5.6K(1608)
R4016	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4017	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4018	1-216-863-91	s	RES, CHIP 3.3M (1608)
R4019	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4020	1-245-772-11	s	RES, METAL FILM(SMD) 220(1608)
R4021	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4022	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4023	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R4024	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4025	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4026	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4027	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4028	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4029	1-216-863-91	s	RES, CHIP 3.3M (1608)
R4030	1-216-863-91	s	RES, CHIP 3.3M (1608)
R4031	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4032	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4033	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4034	1-245-819-11	s	RES, METAL FILM(SMD) 3K (1608)
R4035	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4036	1-218-919-91	s	RES, CHIP 1M (1608)
R4037	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4038	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4039	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4040	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4041	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4042	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4044	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4045	1-245-885-11	s	RES, METAL FILM(SMD) 36K(1608)
R4046	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4047	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4048	1-245-810-11	s	RES, METAL FILM(SMD)1.2K(1608)
R4049	1-245-890-11	s	RES, METAL FILM(SMD) 56K(1608)
R4050	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4051	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R4052	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4053	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4054	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4065	1-245-736-11	s	RES, METAL FILM(SMD) 47 (1608)
R4066	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4067	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4068	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4069	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4072	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4073	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4074	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4075	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4076	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4077	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4078	1-245-773-11	s	RES, METAL FILM(SMD) 240(1608)
R4079	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4080	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4081	1-245-776-11	s	RES, METAL FILM(SMD) 330(1608)
R4082	1-245-800-11	s	RES, METAL FILM(SMD) 470(1608)
R4083	1-245-776-11	s	RES, METAL FILM(SMD) 330(1608)
R4084	1-245-736-11	s	RES, METAL FILM(SMD) 47 (1608)
R4086	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R4087	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4088	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R4089	1-216-864-91	s	CONDUCTOR, CHIP (1608)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4090	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R4091	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4180	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4190	1-245-846-11	s	RES, METAL FILM(SMD)5.6K(1608)
R4191	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R4192	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R4194	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4195	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R4196	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R4197	1-245-810-11	s	RES, METAL FILM(SMD)1.2K(1608)
R4198	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4199	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4200	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4201	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4202	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R4203	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4204	1-245-812-11	s	RES, METAL FILM(SMD)1.5K(1608)
R4205	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4206	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4207	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4208	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4209	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R4210	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4211	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4212	1-245-784-11	s	RES, METAL FILM(SMD) 100(1005)
R4213	1-245-872-11	s	RES, METAL FILM(SMD) 10K(1005)
R4214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4216	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4219	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4220	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4221	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4222	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4223	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4224	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4225	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4226	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4227	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4228	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4229	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4230	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4231	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4232	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4233	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4234	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4235	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4236	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4237	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4238	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4239	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4240	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4241	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4242	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4243	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4244	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4245	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4246	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4247	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4248	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4249	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4250	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4251	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4252	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4253	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4254	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4255	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4256	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4257	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4258	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4259	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4263	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4264	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4266	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4267	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4268	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4269	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4270	1-245-904-11	s	RES, METAL FILM(SMD)220K(1608)
R4271	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4272	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4276	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4277	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4278	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R4279	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4280	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4281	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4282	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R4283	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4284	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4285	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4286	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4287	1-245-810-11	s	RES, METAL FILM(SMD)1.2K(1608)
R4288	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4291	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4292	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4293	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4296	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4297	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4298	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4299	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4300	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4303	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R4304	1-245-925-11	s	RES, METALFILM(SMD)100K(1005)
R4305	1-245-880-11	s	RES, METAL FILM(SMD) 22K(1608)
R4306	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4307	1-245-768-11	s	RES, METAL FILM(SMD) 150(1608)
R4308	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4309	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4310	1-245-816-11	s	RES, METAL FILM(SMD)2.2K(1608)
R4312	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4314	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R4315	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4316	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4317	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4318	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4319	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4320	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4321	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4322	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4323	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4324	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4325	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4326	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4327	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4350	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4351	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4352	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4353	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4354	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4360	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R4361	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R4362	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4363	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4364	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R4370	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4371	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4380	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4381	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4382	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4383	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4384	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4385	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4386	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4387	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4388	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4389	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4391	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4392	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4393	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4394	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4395	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4401	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4402	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4403	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4404	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4405	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4406	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4407	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4408	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4409	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4410	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4411	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4412	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4413	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4414	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4415	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4416	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4417	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4418	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4419	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4420	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4421	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4422	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4423	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4424	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4425	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4426	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4427	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4428	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4429	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4430	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4431	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4432	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4433	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4434	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4435	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4436	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4437	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4438	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4439	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4440	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4441	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4442	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4443	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4444	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4445	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4446	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4447	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4448	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4449	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4450	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4451	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4452	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4453	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4454	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4455	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4456	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4457	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4458	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4463	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4464	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4465	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4466	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4468	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4469	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4472	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4473	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4474	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4475	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4476	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4477	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4478	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4479	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4480	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4481	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4482	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4483	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4484	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4485	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4486	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4487	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4488	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4489	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4490	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4491	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4492	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4493	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4494	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4495	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4496	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4497	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4498	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4499	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4500	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4501	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4502	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4503	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4504	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4505	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4506	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4507	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4508	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4509	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4510	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4511	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4512	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4513	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R4514	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4516	1-245-756-11	s	RES, METAL FILM(SMD) 47 (1005)
R4525	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R4551	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4552	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4553	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4554	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4555	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4556	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4557	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4558	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4560	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4561	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4562	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R4570	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4571	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4572	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4573	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4574	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R4575	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R7100	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7101	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7102	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7103	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7104	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7110	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7111	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7112	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7113	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7114	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7115	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7116	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7117	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7118	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7119	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7120	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7121	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7122	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7123	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7124	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7125	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7126	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7127	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7128	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7129	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7130	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7131	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7132	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7133	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7135	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7140	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7141	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7143	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7150	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7151	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7153	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7181	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7182	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7183	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7184	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7185	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7186	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7187	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7188	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7190	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7191	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7192	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7193	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7200	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7201	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7202	1-220-242-91	s	RES, SQUARE TYPE CHIP 22(3225)
R7203	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7204	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7210	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7211	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7212	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7213	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7214	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7215	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7216	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7217	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7218	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7219	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7220	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7221	1-245-815-11	s	RES, METAL FILM(SMD) 2K (1608)
R7222	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7223	1-245-814-11	s	RES, METAL FILM(SMD)1.8K(1608)
R7224	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7225	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R7226	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7227	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7228	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7229	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R7230	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7231	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7232	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7233	1-245-850-11	s	RES, METAL FILM(SMD)8.2K(1608)
R7235	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7240	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7241	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7243	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7250	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7251	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R7253	1-245-854-11	s	RES, METAL FILM(SMD) 12K(1608)
R7281	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7282	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7283	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7284	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7285	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7286	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7287	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7288	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7290	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7291	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7292	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7293	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R7310	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7311	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7312	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7313	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7314	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7315	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7316	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7317	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7318	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7320	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7321	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7322	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7323	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7324	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7325	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7326	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7327	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7328	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7410	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7411	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7412	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7413	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7414	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7415	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7416	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7417	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7418	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7420	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7421	1-245-884-11	s	RES, METAL FILM(SMD) 33K(1608)
R7422	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7423	1-245-842-11	s	RES, METAL FILM(SMD)3.9K(1608)
R7424	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7425	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7426	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7427	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R7428	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8000	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R8001	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R8002	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R8003	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R8004	1-245-840-11	s	RES, METAL FILM(SMD)3.3K(1608)
R8005	1-245-812-11	s	RES, METAL FILM(SMD)1.5K(1608)
R8007	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R8009	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R8011	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8012	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8013	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8014	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8015	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R8016	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R8021	1-245-764-11	s	RES, METAL FILM(SMD) 100(1608)
R9002	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9003	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9006	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9007	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9008	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9009	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9010	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9011	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9012	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9016	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9017	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9018	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9019	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R9020	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R9021	1-245-844-11	s	RES, METAL FILM(SMD)4.7K(1608)
R9023	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R9024	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9026	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9027	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9028	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9029	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9030	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9031	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9032	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9033	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9034	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9050	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9051	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9053	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9106	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9107	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9108	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9109	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9110	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9111	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9112	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9116	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9117	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9118	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9123	1-245-864-11	s	RES, METAL FILM(SMD)4.7K(1005)
R9124	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9126	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9127	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9128	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9129	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9130	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R9150	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
R9151	1-245-740-11	s	RES, METAL FILM(SMD) 10 (1005)
RB300	1-233-577-21	s	RES, CHIP NETWORK 470 (3216)
RB1000	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1006	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1007	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1200	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1201	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1202	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1203	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1204	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1205	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1217	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1218	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1219	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1220	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3000	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3001	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3002	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3003	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3004	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3005	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3009	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3010	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3011	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3012	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RV4200	1-225-804-21	s	RES, ADJ, CERMET 200
RY7100	1-755-380-21	s	RELAY
RY7200	1-755-380-21	s	RELAY
S1200	1-692-270-41	s	SWITCH, SLIDE
S2200	1-692-270-41	s	SWITCH, SLIDE
S2201	1-762-117-21	s	SWITCH, ROTARY
S2202	1-762-117-21	s	SWITCH, ROTARY
TP200	1-535-877-22	s	CHIP, CHECKER
TP300	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP505	1-535-877-22	s	CHIP, CHECKER
TP581	1-535-877-22	s	CHIP, CHECKER
TP582	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP811	1-535-877-22	s	CHIP, CHECKER
TP812	1-535-877-22	s	CHIP, CHECKER
TP813	1-535-877-22	s	CHIP, CHECKER
TP814	1-535-877-22	s	CHIP, CHECKER
TP1011	1-535-877-22	s	CHIP, CHECKER
TP1012	1-535-877-22	s	CHIP, CHECKER
TP1013	1-535-877-22	s	CHIP, CHECKER
TP1014	1-535-877-22	s	CHIP, CHECKER
TP1061	1-535-877-22	s	CHIP, CHECKER

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP1062	1-535-877-22	s	CHIP, CHECKER
TP1063	1-535-877-22	s	CHIP, CHECKER
TP1064	1-535-877-22	s	CHIP, CHECKER
TP2200	1-535-877-22	s	CHIP, CHECKER
TP2201	1-535-877-22	s	CHIP, CHECKER
TP2202	1-535-877-22	s	CHIP, CHECKER
TP2203	1-535-877-22	s	CHIP, CHECKER
TP2402	1-535-877-22	s	CHIP, CHECKER
TP2403	1-535-877-22	s	CHIP, CHECKER
TP2404	1-535-877-22	s	CHIP, CHECKER
TP3001	1-535-877-22	s	CHIP, CHECKER
TP4000	1-535-877-22	s	CHIP, CHECKER
TP4001	1-535-877-22	s	CHIP, CHECKER
TP4002	1-535-877-22	s	CHIP, CHECKER
TP4003	1-535-877-22	s	CHIP, CHECKER
TP4004	1-535-877-22	s	CHIP, CHECKER
TP4005	1-535-877-22	s	CHIP, CHECKER
TP4007	1-535-877-22	s	CHIP, CHECKER
TP4190	1-535-877-22	s	CHIP, CHECKER
TP4200	1-535-877-22	s	CHIP, CHECKER
TP4201	1-535-877-22	s	CHIP, CHECKER
TP4202	1-535-877-22	s	CHIP, CHECKER
TP4204	1-535-877-22	s	CHIP, CHECKER
TP4207	1-535-877-22	s	CHIP, CHECKER
TP4209	1-535-877-22	s	CHIP, CHECKER
TP4213	1-535-877-22	s	CHIP, CHECKER
TP4214	1-535-877-22	s	CHIP, CHECKER
TP4242	1-535-877-22	s	CHIP, CHECKER
TP4243	1-535-877-22	s	CHIP, CHECKER
TP4291	1-535-877-22	s	CHIP, CHECKER
TP4292	1-535-877-22	s	CHIP, CHECKER
TP4293	1-535-877-22	s	CHIP, CHECKER
TP4370	1-535-877-22	s	CHIP, CHECKER
TP4400	1-535-877-22	s	CHIP, CHECKER
TP4401	1-535-877-22	s	CHIP, CHECKER
TP4402	1-535-877-22	s	CHIP, CHECKER
TP4403	1-535-877-22	s	CHIP, CHECKER
TP4407	1-535-877-22	s	CHIP, CHECKER
TP4408	1-535-877-22	s	CHIP, CHECKER
TP4409	1-535-877-22	s	CHIP, CHECKER
TP4450	1-535-877-22	s	CHIP, CHECKER
TP7101	1-535-877-22	s	CHIP, CHECKER
TP7102	1-535-877-22	s	CHIP, CHECKER
TP7131	1-535-877-22	s	CHIP, CHECKER
TP7201	1-535-877-22	s	CHIP, CHECKER
TP7202	1-535-877-22	s	CHIP, CHECKER
TP7231	1-535-877-22	s	CHIP, CHECKER
TP8001	1-535-877-22	s	CHIP, CHECKER
TP9000	1-535-877-22	s	CHIP, CHECKER
TP9021	1-535-877-22	s	CHIP, CHECKER
TP9070	1-535-877-22	s	CHIP, CHECKER
TP9071	1-535-877-22	s	CHIP, CHECKER
TP9072	1-535-877-22	s	CHIP, CHECKER
TP9080	1-535-877-22	s	CHIP, CHECKER
TP9081	1-535-877-22	s	CHIP, CHECKER
TP9082	1-535-877-22	s	CHIP, CHECKER
TP9101	1-535-877-22	s	CHIP, CHECKER
TP9102	1-535-877-22	s	CHIP, CHECKER
TP9171	1-535-877-22	s	CHIP, CHECKER

(APR-91 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP9172	1-535-877-22	s	CHIP, CHECKER
TP9182	1-535-877-22	s	CHIP, CHECKER
X4200	1-795-677-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4201	1-795-676-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4202	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4203	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4204	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4205	1-813-003-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X4350	1-814-056-11	s	OSCILLATOR, CRYSTAL (TCXO)
X4360	1-814-057-11	s	OSCILLATOR, CRYSTAL (TCXO)
X9000	1-813-394-12	s	OSCILLATOR, CRYSTAL (VCXO) 5V

CL-29 BOARD (SUFFIX 22)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8315-621-D	s	MOUNTED CIRCUIT BOARD, CL-29
C1	1-137-370-51	s	CAP, PETP FILM 0.01MF
CN930	1-564-011-11	o	PIN, CONNECTOR 12P
CN931	1-564-001-11	o	PIN, CONNECTOR 2P
CN933	1-573-599-51	s	CONNECTOR, FFC/FPC (ZIF) ST 5P
CN935	1-564-001-11	o	PIN, CONNECTOR 2P
D1	8-719-938-07	s	DIODE GL480E00000F
D2	8-719-938-07	s	DIODE GL480E00000F
Q1	8-729-903-81	s	PHOTO TRANSISTOR PT480E00000F
Q2	8-729-903-81	s	PHOTO TRANSISTOR PT480E00000F
R1	1-247-825-31	s	RES, CARBON (SMALL) 560
R2	1-247-825-31	s	RES, CARBON (SMALL) 560

CL-29 BOARD (SUFFIX 32)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8315-621-D	s	MOUNTED CIRCUIT BOARD, CL-29
1pc	3-171-424-03	s	HOLDER, SENSOR
C1	1-127-971-21	s	CAP, CHIP FILM 0.01MF (3216)
CN930	1-564-011-11	o	PIN, CONNECTOR 12P
CN931	1-564-001-11	o	PIN, CONNECTOR 2P
CN933	1-573-599-51	s	CONNECTOR, FFC/FPC (ZIF) ST 5P
CN935	1-564-001-11	o	PIN, CONNECTOR 2P
D1	8-719-938-07	s	DIODE GL480E00000F
D2	8-719-938-07	s	DIODE GL480E00000F
Q1	8-729-903-81	s	PHOTO TRANSISTOR PT480E00000F
Q2	8-729-903-81	s	PHOTO TRANSISTOR PT480E00000F
R1	1-218-853-91	s	RES, CHIP 1.8K (1608)
R2	1-218-853-91	s	RES, CHIP 1.8K (1608)
R3	1-218-853-91	s	RES, CHIP 1.8K (1608)
R4	1-218-853-91	s	RES, CHIP 1.8K (1608)
R5	1-218-853-91	s	RES, CHIP 1.8K (1608)
R6	1-218-853-91	s	RES, CHIP 1.8K (1608)

CP-393 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-729-A	s	MOUNTED CIRCUIT BOARD, CP-393
1pc	⚠ 1-767-156-11	s	OSCILLATOR, CRYSTAL
BZ1	1-529-025-12	s	BUZZER
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C20	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C30	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C33	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C37	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C39	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C41	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C42	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C43	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C44	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C45	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C305	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C309	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C332	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C336	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C341	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C343	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C347	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-107-418-21	s	CAP, CHIP ELECT 10MF
C355	1-107-418-21	s	CAP, CHIP ELECT 10MF
C356	1-107-418-21	s	CAP, CHIP ELECT 10MF
C357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C360	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C361	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C363	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C364	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C372	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C374	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C376	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C382	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C384	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C385	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C386	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C387	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C388	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C389	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C390	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C391	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C410	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C415	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C416	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C417	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C418	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C419	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-117-713-21	s	CAP, CHIP ELECT 100MF
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C703	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C704	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C705	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C706	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C707	1-128-536-21	s	CAP, CHIP ELECT 100MF
C708	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C709	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C710	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C711	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C712	1-128-536-21	s	CAP, CHIP ELECT 100MF
C713	1-128-536-21	s	CAP, CHIP ELECT 100MF
C714	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C715	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-128-536-21	s	CAP, CHIP ELECT 100MF
C721	1-128-536-21	s	CAP, CHIP ELECT 100MF
C722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C723	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C724	1-117-713-21	s	CAP, CHIP ELECT 100MF
C725	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C726	1-117-713-21	s	CAP, CHIP ELECT 100MF
C727	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C729	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C737	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C738	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C741	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C745	1-117-713-21	s	CAP, CHIP ELECT 100MF
C748	1-128-536-21	s	CAP, CHIP ELECT 100MF
C749	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C758	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C760	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C761	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C762	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C763	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C765	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C766	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C767	1-107-420-21	s	CAP, CHIP ELECT 47MF
C768	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C769	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C772	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C780	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C781	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C782	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C783	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C785	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C787	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C788	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C789	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C972	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C973	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-695-889-21	s	PIN, CONNECTOR (PC BOARD) 10P
CN3	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN300	1-750-635-21	o	PIN, CONNECTOR (PC BOARD) 5P
CN301	1-764-441-51	s	CONNECTOR, FPC 30P
CN502	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P
CN700	1-695-223-21	o	PIN, CONNECTOR (SMD) 10P
CN701	1-793-807-21	o	PIN, CONNECTOR (WITH PWB) 20P
CN800	1-573-931-71	s	CONNECTOR, FFC/FPC (ZIF) 22P
CN951	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D500	8-719-074-31	s	DIODE CL-196YG-CD-T
D501	8-719-074-31	s	DIODE CL-196YG-CD-T
D502	8-719-074-31	s	DIODE CL-196YG-CD-T
D503	8-719-077-09	s	DIODE CL-196HR-CD-T
D704	8-719-066-16	s	DIODE RB491D-T146
D705	8-719-037-29	s	DIODE RD15SB-T1
D706	8-719-066-98	s	DIODE RB051L-40TE25
D707	8-719-071-34	s	DIODE RB521S-30-TE61
D708	8-719-066-98	s	DIODE RB051L-40TE25
D709	8-719-071-34	s	DIODE RB521S-30-TE61
D710	8-719-037-29	s	DIODE RD15SB-T1
D711	8-719-066-98	s	DIODE RB051L-40TE25
D712	8-719-079-92	s	DIODE 1SR159-200TE25
D713	8-719-066-98	s	DIODE RB051L-40TE25
D714	8-719-079-92	s	DIODE 1SR159-200TE25
D900	8-719-074-31	s	DIODE CL-196YG-CD-T
E200	1-535-877-22	s	CHIP, CHECKER
E201	1-535-877-22	s	CHIP, CHECKER
E300	1-535-877-22	s	CHIP, CHECKER
E301	1-535-877-22	s	CHIP, CHECKER
E302	1-535-877-22	s	CHIP, CHECKER
E700	1-535-877-22	s	CHIP, CHECKER
E701	1-535-877-22	s	CHIP, CHECKER
E900	1-535-877-22	s	CHIP, CHECKER
F700	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F701	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
FB1	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB3	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB300	1-400-832-21	s	SMD EMI FERRITE
FB301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB307	1-400-832-21	s	SMD EMI FERRITE
FB308	1-400-832-21	s	SMD EMI FERRITE
FB309	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB310	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB311	1-400-832-21	s	SMD EMI FERRITE
FB312	1-400-832-21	s	SMD EMI FERRITE
FB313	1-400-832-21	s	SMD EMI FERRITE
FB314	1-400-832-21	s	SMD EMI FERRITE
FB315	1-400-832-21	s	SMD EMI FERRITE
FB316	1-400-832-21	s	SMD EMI FERRITE
FB317	1-400-832-21	s	SMD EMI FERRITE
FB318	1-400-832-21	s	SMD EMI FERRITE
FB319	1-400-832-21	s	SMD EMI FERRITE
FB320	1-400-832-21	s	SMD EMI FERRITE
FB321	1-400-832-21	s	SMD EMI FERRITE
FB322	1-400-832-21	s	SMD EMI FERRITE
FB323	1-400-832-21	s	SMD EMI FERRITE
FB324	1-400-832-21	s	SMD EMI FERRITE
FB325	1-400-832-21	s	SMD EMI FERRITE
FB326	1-400-832-21	s	SMD EMI FERRITE
FB327	1-400-832-21	s	SMD EMI FERRITE
FB328	1-400-832-21	s	SMD EMI FERRITE
FB718	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB719	1-400-832-21	s	SMD EMI FERRITE
FB720	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB721	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB722	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB723	1-400-832-21	s	SMD EMI FERRITE
FB724	1-400-832-21	s	SMD EMI FERRITE
FB725	1-400-832-21	s	SMD EMI FERRITE
FB726	1-400-832-21	s	SMD EMI FERRITE
FB727	1-400-832-21	s	SMD EMI FERRITE
FB728	1-400-832-21	s	SMD EMI FERRITE
FB729	1-400-832-21	s	SMD EMI FERRITE
FB730	1-400-832-21	s	SMD EMI FERRITE
FB731	1-400-832-21	s	SMD EMI FERRITE
FB800	1-400-832-21	s	SMD EMI FERRITE
FB801	1-400-832-21	s	SMD EMI FERRITE
FB802	1-400-832-21	s	SMD EMI FERRITE
FB803	1-400-832-21	s	SMD EMI FERRITE
FB804	1-400-832-21	s	SMD EMI FERRITE
FB805	1-400-832-21	s	SMD EMI FERRITE
FB806	1-400-832-21	s	SMD EMI FERRITE
FB807	1-400-832-21	s	SMD EMI FERRITE
FB808	1-400-832-21	s	SMD EMI FERRITE
FB809	1-400-832-21	s	SMD EMI FERRITE
FB810	1-400-832-21	s	SMD EMI FERRITE
FB811	1-400-832-21	s	SMD EMI FERRITE
FB812	1-400-832-21	s	SMD EMI FERRITE
FB813	1-400-832-21	s	SMD EMI FERRITE
FB814	1-400-832-21	s	SMD EMI FERRITE
FB815	1-400-832-21	s	SMD EMI FERRITE
FB816	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB817	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB818	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB819	1-400-832-21	s	SMD EMI FERRITE
FB820	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB821	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB822	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB823	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB824	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB825	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB826	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB827	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB828	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB829	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB830	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB831	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB832	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB833	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB834	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB835	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB836	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB837	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
IC4	8-759-445-94	s	IC AK6480AM-E2
IC5	6-700-655-01	s	IC LT1963ES8#TR
IC6	6-708-277-01	s	IC CDCVF25081PWR
IC200	6-709-700-01	s	IC K4S641632K-UC75
IC201	6-709-700-01	s	IC K4S641632K-UC75
IC203	6-709-700-01	s	IC K4S641632K-UC75
IC204	6-709-700-01	s	IC K4S641632K-UC75
IC206	6-704-281-01	s	IC M48T35AV-10MH1F
IC302	6-707-886-01	s	IC TC74VHCT125AFT(EKJ)
IC303	6-710-009-01	s	IC MD56V62320K-75TAZN3B

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC304	8-759-672-76	s	IC AK9813BF-E2
IC305	8-759-392-65	s	IC AD828ARZ-REEL
IC306	8-752-371-55	s	IC CXD2302Q-T4
IC307	8-759-392-65	s	IC AD828ARZ-REEL
IC308	8-759-669-45	s	IC TL062CPWR-12
IC309	8-759-669-45	s	IC TL062CPWR-12
IC310	8-752-371-55	s	IC CXD2302Q-T4
IC311	8-752-371-55	s	IC CXD2302Q-T4
IC314	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC315	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC316	6-708-277-01	s	IC CDCVF25081PWR
IC320	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC503	8-752-392-03	s	IC CXD1095BR
IC504	8-752-392-03	s	IC CXD1095BR
IC700	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC701	8-759-650-39	s	IC LT1374IS8#TR
IC702	8-759-650-39	s	IC LT1374IS8#TR
IC706	6-700-792-01	s	IC NJM78M09DL1A(TE1)
IC708	8-759-395-10	s	IC MAX764CSA+TG068
IC709	6-704-164-01	s	IC S-80845CLUA-B66T2G
IC710	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC711	8-759-392-77	s	IC SN74LVC245APWR
IC712	8-759-392-77	s	IC SN74LVC245APWR
IC713	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC715	8-759-437-63	s	IC TD62308AFG(EL)
IC716	8-759-437-39	s	IC MB3771PF-ER
IC717	6-701-543-01	s	IC SN75C1168NSR
IC720	8-759-597-82	s	IC UPD4702G-E2
IC721	8-759-597-82	s	IC UPD4702G-E2
IC722	8-759-392-77	s	IC SN74LVC245APWR
IC723	6-711-333-01	s	IC DS92LV1212AMSAX
IC724	8-759-597-57	s	IC LTC1628CG#TR
IC800	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC801	8-759-578-68	s	IC SN74LVCC4245APWR
IC951	8-759-573-97	s	IC SN74LVC541APWR
IC953	6-701-990-01	s	IC SN74LVC257APWR
JC1	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC2	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC3	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC4	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC5	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC6	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC7	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC8	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC9	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC10	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC11	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC12	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC13	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC14	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC15	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC16	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC17	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC18	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC19	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
L100	1-412-987-41	s	INDUCTOR, SMALL TYPE 4.7UH
L101	1-412-987-41	s	INDUCTOR, SMALL TYPE 4.7UH
L300	1-412-987-41	s	INDUCTOR, SMALL TYPE 4.7UH

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L301	1-412-987-41	s	INDUCTOR, SMALL TYPE 4.7UH
L302	1-412-987-41	s	INDUCTOR, SMALL TYPE 4.7UH
L700	1-416-948-21	s	COIL, CHOKE 10UH
L701	1-416-948-21	s	COIL, CHOKE 10UH
L702	1-416-948-21	s	COIL, CHOKE 10UH
L705	1-416-606-21	s	COIL, CHOKE (SMD) 47UH
L707	1-416-948-21	s	COIL, CHOKE 10UH
L708	1-412-987-41	s	INDUCTOR, SMALL TYPE 4.7UH
L709	1-416-948-21	s	COIL, CHOKE 10UH
L710	1-416-948-21	s	COIL, CHOKE 10UH
Q1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q501	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q502	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q503	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q504	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q700	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q701	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q702	8-729-047-85	s	TRANSISTOR SI4416DY-T1
Q703	8-729-047-85	s	TRANSISTOR SI4416DY-T1
Q704	8-729-047-85	s	TRANSISTOR SI4416DY-T1
Q705	8-729-047-85	s	TRANSISTOR SI4416DY-T1
Q706	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q707	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q709	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q900	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3	1-208-919-81	s	RES, CHIP 22K (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-208-919-81	s	RES, CHIP 22K (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R9	1-208-919-81	s	RES, CHIP 22K (1005)
R10	1-208-855-81	s	RES, CHIP 47 (1005)
R11	1-220-878-81	s	RES, CHIP 22 (1005)
R12	1-220-884-81	s	RES, CHIP 39 (1005)
R13	1-220-878-81	s	RES, CHIP 22 (1005)
R14	1-220-878-81	s	RES, CHIP 22 (1005)
R15	1-220-878-81	s	RES, CHIP 22 (1005)
R17	1-208-911-81	s	RES, CHIP 10K (1005)
R18	1-208-855-81	s	RES, CHIP 47 (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-208-895-81	s	RES, CHIP 2.2K (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-220-878-81	s	RES, CHIP 22 (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R31	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R32	1-220-878-81	s	RES, CHIP 22 (1005)
R33	1-208-919-81	s	RES, CHIP 22K (1005)
R34	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-919-81	s	RES, CHIP 22K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-919-81	s	RES, CHIP 22K (1005)
R40	1-208-919-81	s	RES, CHIP 22K (1005)
R41	1-208-919-81	s	RES, CHIP 22K (1005)
R90	1-208-911-81	s	RES, CHIP 10K (1005)
R95	1-208-911-81	s	RES, CHIP 10K (1005)
R100	1-208-919-81	s	RES, CHIP 22K (1005)
R113	1-208-919-81	s	RES, CHIP 22K (1005)
R115	1-208-919-81	s	RES, CHIP 22K (1005)
R117	1-208-919-81	s	RES, CHIP 22K (1005)
R130	1-208-919-81	s	RES, CHIP 22K (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-208-935-81	s	RES, CHIP 100K (1005)
R143	1-208-905-81	s	RES, CHIP 5.6K (1005)
R144	1-208-910-81	s	RES, CHIP 9.1K (1005)
R145	1-208-911-81	s	RES, CHIP 10K (1005)
R146	1-208-919-81	s	RES, CHIP 22K (1005)
R148	1-208-879-81	s	RES, CHIP 470 (1005)
R200	1-208-935-81	s	RES, CHIP 100K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-208-935-81	s	RES, CHIP 100K (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-208-855-81	s	RES, CHIP 47 (1005)
R312	1-208-863-81	s	RES, CHIP 100 (1005)
R313	1-208-855-81	s	RES, CHIP 47 (1005)
R314	1-220-878-81	s	RES, CHIP 22 (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-887-81	s	RES, CHIP 1.0K (1005)
R318	1-208-895-81	s	RES, CHIP 2.2K (1005)
R319	1-208-935-81	s	RES, CHIP 100K (1005)
R320	1-208-927-81	s	RES, CHIP 47K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-220-878-81	s	RES, CHIP 22 (1005)
R325	1-220-878-81	s	RES, CHIP 22 (1005)
R326	1-220-878-81	s	RES, CHIP 22 (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-220-878-81	s	RES, CHIP 22 (1005)
R329	1-220-878-81	s	RES, CHIP 22 (1005)
R330	1-208-863-81	s	RES, CHIP 100 (1005)
R331	1-208-875-81	s	RES, CHIP 330 (1005)
R332	1-208-863-81	s	RES, CHIP 100 (1005)
R333	1-220-878-81	s	RES, CHIP 22 (1005)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-220-878-81	s	RES, CHIP 22 (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R338	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R340	1-208-921-81	s	RES, CHIP 27K (1005)
R341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R342	1-208-895-81	s	RES, CHIP 2.2K (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R344	1-220-878-81	s	RES, CHIP 22 (1005)
R345	1-208-895-81	s	RES, CHIP 2.2K (1005)
R346	1-220-878-81	s	RES, CHIP 22 (1005)
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R349	1-220-878-81	s	RES, CHIP 22 (1005)
R350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R351	1-208-895-81	s	RES, CHIP 2.2K (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R359	1-220-878-81	s	RES, CHIP 22 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R361	1-208-855-81	s	RES, CHIP 47 (1005)
R362	1-208-855-81	s	RES, CHIP 47 (1005)
R363	1-208-927-81	s	RES, CHIP 47K (1005)
R364	1-208-911-81	s	RES, CHIP 10K (1005)
R365	1-220-878-81	s	RES, CHIP 22 (1005)
R366	1-220-878-81	s	RES, CHIP 22 (1005)
R367	1-208-863-81	s	RES, CHIP 100 (1005)
R368	1-220-878-81	s	RES, CHIP 22 (1005)
R369	1-220-878-81	s	RES, CHIP 22 (1005)
R370	1-208-863-81	s	RES, CHIP 100 (1005)
R371	1-208-887-81	s	RES, CHIP 1.0K (1005)
R372	1-208-887-81	s	RES, CHIP 1.0K (1005)
R373	1-208-887-81	s	RES, CHIP 1.0K (1005)
R374	1-220-878-81	s	RES, CHIP 22 (1005)
R375	1-220-878-81	s	RES, CHIP 22 (1005)
R376	1-208-863-81	s	RES, CHIP 100 (1005)
R377	1-208-863-81	s	RES, CHIP 100 (1005)
R378	1-220-878-81	s	RES, CHIP 22 (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R380	1-208-875-81	s	RES, CHIP 330 (1005)
R381	1-220-878-81	s	RES, CHIP 22 (1005)
R382	1-208-875-81	s	RES, CHIP 330 (1005)
R383	1-208-927-81	s	RES, CHIP 47K (1005)
R384	1-208-927-81	s	RES, CHIP 47K (1005)
R385	1-208-911-81	s	RES, CHIP 10K (1005)
R386	1-208-911-81	s	RES, CHIP 10K (1005)
R387	1-220-878-81	s	RES, CHIP 22 (1005)
R389	1-220-878-81	s	RES, CHIP 22 (1005)
R390	1-220-878-81	s	RES, CHIP 22 (1005)
R392	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R393	1-208-855-81	s	RES, CHIP 47 (1005)
R394	1-208-863-81	s	RES, CHIP 100 (1005)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R395	1-208-863-81	s	RES, CHIP 100 (1005)
R396	1-208-959-81	s	RES, CHIP 1M (1005)
R397	1-208-959-81	s	RES, CHIP 1M (1005)
R398	1-208-959-81	s	RES, CHIP 1M (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-863-81	s	RES, CHIP 100 (1005)
R403	1-208-959-81	s	RES, CHIP 1M (1005)
R404	1-208-919-81	s	RES, CHIP 22K (1005)
R405	1-208-870-81	s	RES, CHIP 200 (1005)
R406	1-208-879-81	s	RES, CHIP 470 (1005)
R407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R408	1-208-875-81	s	RES, CHIP 330 (1005)
R409	1-208-875-81	s	RES, CHIP 330 (1005)
R411	1-220-870-81	s	RES, CHIP 10 (1005)
R412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-208-959-81	s	RES, CHIP 1M (1005)
R415	1-208-959-81	s	RES, CHIP 1M (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-927-81	s	RES, CHIP 47K (1005)
R418	1-208-927-81	s	RES, CHIP 47K (1005)
R419	1-208-887-81	s	RES, CHIP 1.0K (1005)
R420	1-208-887-81	s	RES, CHIP 1.0K (1005)
R421	1-208-883-81	s	RES, CHIP 680 (1005)
R422	1-208-883-81	s	RES, CHIP 680 (1005)
R453	1-208-883-81	s	RES, CHIP 680 (1005)
R454	1-208-887-81	s	RES, CHIP 1.0K (1005)
R455	1-220-870-81	s	RES, CHIP 10 (1005)
R456	1-208-888-81	s	RES, CHIP 1.1K (1005)
R457	1-208-894-81	s	RES, CHIP 2.0K (1005)
R458	1-208-875-81	s	RES, CHIP 330 (1005)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-935-81	s	RES, CHIP 100K (1005)
R523	1-208-935-81	s	RES, CHIP 100K (1005)
R524	1-208-935-81	s	RES, CHIP 100K (1005)
R525	1-208-935-81	s	RES, CHIP 100K (1005)
R526	1-208-863-81	s	RES, CHIP 100 (1005)
R527	1-208-863-81	s	RES, CHIP 100 (1005)
R528	1-208-863-81	s	RES, CHIP 100 (1005)
R530	1-208-863-81	s	RES, CHIP 100 (1005)
R532	1-208-935-81	s	RES, CHIP 100K (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-220-878-81	s	RES, CHIP 22 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-208-863-81	s	RES, CHIP 100 (1005)
R711	1-220-238-91	s	RES, SQUARE TYPE CHIP 10(3225)
R714	1-220-870-81	s	RES, CHIP 10 (1005)
R715	1-208-935-81	s	RES, CHIP 100K (1005)
R716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R718	1-208-911-81	s	RES, CHIP 10K (1005)
R719	1-208-911-81	s	RES, CHIP 10K (1005)
R720	1-208-911-81	s	RES, CHIP 10K (1005)
R722	1-208-935-81	s	RES, CHIP 100K (1005)
R723	1-208-935-81	s	RES, CHIP 100K (1005)
R724	1-208-927-81	s	RES, CHIP 47K (1005)
R725	1-208-911-81	s	RES, CHIP 10K (1005)
R727	1-208-935-81	s	RES, CHIP 100K (1005)
R728	1-208-935-81	s	RES, CHIP 100K (1005)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R729	1-208-863-81	s	RES, CHIP 100 (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R731	1-208-935-81	s	RES, CHIP 100K (1005)
R732	1-208-935-81	s	RES, CHIP 100K (1005)
R733	1-208-911-81	s	RES, CHIP 10K (1005)
R734	1-208-863-81	s	RES, CHIP 100 (1005)
R735	1-208-863-81	s	RES, CHIP 100 (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-911-81	s	RES, CHIP 10K (1005)
R738	1-208-903-81	s	RES, CHIP 4.7K (1005)
R739	1-208-903-81	s	RES, CHIP 4.7K (1005)
R740	1-208-913-81	s	RES, CHIP 12K (1005)
R741	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-863-81	s	RES, CHIP 100 (1005)
R749	1-208-919-81	s	RES, CHIP 22K (1005)
R754	1-208-919-81	s	RES, CHIP 22K (1005)
R755	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R757	1-208-919-81	s	RES, CHIP 22K (1005)
R758	1-208-919-81	s	RES, CHIP 22K (1005)
R759	1-208-919-81	s	RES, CHIP 22K (1005)
R761	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R762	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R763	1-242-967-81	s	RES, CHIP 1.0 (1005)
R764	1-242-967-81	s	RES, CHIP 1.0 (1005)
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-871-81	s	RES, CHIP 220 (1005)
R767	1-208-919-81	s	RES, CHIP 22K (1005)
R768	1-208-919-81	s	RES, CHIP 22K (1005)
R769	1-208-903-81	s	RES, CHIP 4.7K (1005)
R770	1-208-863-81	s	RES, CHIP 100 (1005)
R771	1-208-919-81	s	RES, CHIP 22K (1005)
R772	1-208-919-81	s	RES, CHIP 22K (1005)
R773	1-208-911-81	s	RES, CHIP 10K (1005)
R774	1-208-887-81	s	RES, CHIP 1.0K (1005)
R775	1-208-894-81	s	RES, CHIP 2.0K (1005)
R776	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R777	1-242-967-81	s	RES, CHIP 1.0 (1005)
R778	1-242-967-81	s	RES, CHIP 1.0 (1005)
R779	1-208-911-81	s	RES, CHIP 10K (1005)
R780	1-208-903-81	s	RES, CHIP 4.7K (1005)
R781	1-208-903-81	s	RES, CHIP 4.7K (1005)
R782	1-208-895-81	s	RES, CHIP 2.2K (1005)
R783	1-208-855-81	s	RES, CHIP 47 (1005)
R784	1-208-943-81	s	RES, CHIP 220K (1005)
R786	1-208-913-81	s	RES, CHIP 12K (1005)
R787	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R790	1-208-863-81	s	RES, CHIP 100 (1005)
R791	1-208-863-81	s	RES, CHIP 100 (1005)
R792	1-208-863-81	s	RES, CHIP 100 (1005)
R793	1-208-863-81	s	RES, CHIP 100 (1005)
R794	1-208-863-81	s	RES, CHIP 100 (1005)
R799	1-208-927-81	s	RES, CHIP 47K (1005)
R801	1-208-935-81	s	RES, CHIP 100K (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R837	1-208-935-81	s	RES, CHIP 100K (1005)
R940	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R941	1-220-878-81	s	RES, CHIP 22 (1005)
R951	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R952	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R953	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R954	1-208-887-81	s	RES, CHIP 1.0K (1005)
R955	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R960	1-220-878-81	s	RES, CHIP 22 (1005)
R961	1-220-878-81	s	RES, CHIP 22 (1005)
R962	1-220-878-81	s	RES, CHIP 22 (1005)
R963	1-220-878-81	s	RES, CHIP 22 (1005)
R964	1-220-878-81	s	RES, CHIP 22 (1005)
R965	1-220-878-81	s	RES, CHIP 22 (1005)
R977	1-220-878-81	s	RES, CHIP 22 (1005)
R978	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-208-911-81	s	RES, CHIP 10K (1005)
R983	1-220-870-81	s	RES, CHIP 10 (1005)
R984	1-208-887-81	s	RES, CHIP 1.0K (1005)
R985	1-208-911-81	s	RES, CHIP 10K (1005)
R986	1-208-863-81	s	RES, CHIP 100 (1005)
R987	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R997	1-208-935-81	s	RES, CHIP 100K (1005)
RB21	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB22	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB23	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB24	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB25	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB26	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB27	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB33	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB34	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB35	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB36	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB37	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB38	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB39	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB301	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB302	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB303	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB304	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB315	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB316	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB317	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB318	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB319	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB320	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB321	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB323	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB324	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB325	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB326	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB327	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB328	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB329	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB330	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB331	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB332	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB701	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB702	1-234-379-21	s	RES, NETWORK 22K (1005X4)

(CP-393 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB703	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB704	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB705	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB706	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB901	1-234-379-21	s	RES, NETWORK 22K (1005X4)
S1	1-692-271-41	s	SWITCH, SLIDE
S2	1-692-271-41	s	SWITCH, SLIDE
S300	1-692-270-41	s	SWITCH, SLIDE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP103	1-535-877-22	s	CHIP, CHECKER
TP300	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP304	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP951	1-535-877-22	s	CHIP, CHECKER
TP952	1-535-877-22	s	CHIP, CHECKER
TP953	1-535-877-22	s	CHIP, CHECKER
TP954	1-535-877-22	s	CHIP, CHECKER
X2	1-814-010-11	s	OSCILLATOR, CRYSTAL(16.384MHZ)
X3	1-813-264-11	s	OSCILLATOR, CRYSTAL
X300	1-813-480-11	s	OSCILLATOR, CRYSTAL

CP-397 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-731-A	s	MOUNTED CIRCUIT BOARD, CP-397
C502	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C503	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C601	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C602	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C603	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C604	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C700	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C701	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C702	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C704	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
CN1	1-774-864-11	o	CONNECTOR, BOARD TO BOARD 60P
CN501	1-750-787-21	s	CONNECTOR (XLR TYPE) 3P
CN600	1-816-669-11	s	CONNECTOR (RECEPTACLE), XLR
CN700	1-750-788-21	s	CONNECTOR (XLR TYPE) 3P
CN701	1-750-787-21	s	CONNECTOR (XLR TYPE) 3P
FB504	1-414-618-21	s	FERRITE, EMI (SMD) (2012)
FB505	1-414-618-21	s	FERRITE, EMI (SMD) (2012)
FB607	1-414-618-21	s	FERRITE, EMI (SMD) (2012)
FB608	1-414-618-21	s	FERRITE, EMI (SMD) (2012)
FB609	1-414-618-21	s	FERRITE, EMI (SMD) (2012)
FB610	1-414-618-21	s	FERRITE, EMI (SMD) (2012)
FB700	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB709	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB710	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB711	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB712	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB713	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB714	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB715	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB716	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB717	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
R504	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1602	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1703	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1704	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R1707	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R2600	1-216-864-91	s	CONDUCTOR, CHIP (1608)

CP-398 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-732-A	s	MOUNTED CIRCUIT BOARD, CP-398
1pc	7-623-508-01	s	LUG, 3
C1	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C2	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C4	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C5	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C6	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C7	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C8	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C9	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C10	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C11	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C12	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C13	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C14	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C15	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C16	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C17	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C18	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C19	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-750-065-11	o	CONNECTOR, BOARD TO BOARD 60P
CN2	1-573-580-11	s	CONNECTOR, BNC (RECEPTACLE) 2P
CN3	1-573-580-11	s	CONNECTOR, BNC (RECEPTACLE) 2P
CN5	1-573-580-11	s	CONNECTOR, BNC (RECEPTACLE) 2P
CN6	1-573-580-11	s	CONNECTOR, BNC (RECEPTACLE) 2P
CN100	1-820-907-11	s	JACK, MODULAR
D1	8-719-056-65	s	DIODE 1SS372-TE85L
FL1	1-239-896-22	s	FILTER, EMI (SMD)
FL2	1-239-896-22	s	FILTER, EMI (SMD)
FL3	1-239-896-22	s	FILTER, EMI (SMD)
FL4	1-239-896-22	s	FILTER, EMI (SMD)
IC1	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC2	8-759-539-89	s	IC LM2990SX-5.0
IC3	8-752-068-25	s	IC CXA1451M-TH
IC4	8-752-068-25	s	IC CXA1451M-TH
IC5	8-752-068-25	s	IC CXA1451M-TH
L3	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L4	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
Q1	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q2	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q4	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q5	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
R1	1-211-990-91	s	RES, CHIP 75 (1608)
R2	1-211-990-91	s	RES, CHIP 75 (1608)
R4	1-218-875-91	s	RES, CHIP 15K (1608)
R5	1-218-875-91	s	RES, CHIP 15K (1608)
R7	1-211-985-91	s	RES, CHIP 47 (1608)
R8	1-211-985-91	s	RES, CHIP 47 (1608)
R10	1-218-843-91	s	RES, CHIP 680 (1608)
R11	1-218-843-91	s	RES, CHIP 680 (1608)

(CP-398 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R13	1-211-985-91	s	RES, CHIP 47 (1608)
R14	1-211-985-91	s	RES, CHIP 47 (1608)
R16	1-218-843-91	s	RES, CHIP 680 (1608)
R17	1-218-843-91	s	RES, CHIP 680 (1608)
R19	1-211-977-91	s	RES, CHIP 22 (1608)
R21	1-211-977-91	s	RES, CHIP 22 (1608)
R22	1-211-990-91	s	RES, CHIP 75 (1608)
R23	1-211-990-91	s	RES, CHIP 75 (1608)
R24	1-211-990-91	s	RES, CHIP 75 (1608)
R25	1-211-990-91	s	RES, CHIP 75 (1608)
R26	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R27	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R28	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R29	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R30	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R31	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R32	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
R33	1-245-761-11	s	RES, METAL FILM(SMD) 75 (1608)
S1	1-571-427-11	s	SWITCH, SLIDE
S2	1-571-427-11	s	SWITCH, SLIDE
T100	1-439-980-11	s	TRANSFORMER, PULSE

CP-399 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-733-A	s	MOUNTED CIRCUIT BOARD, CP-399
2pcs	3-673-910-02	s	SCREW, CONNECTOR
C106	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C113	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C114	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C115	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C116	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C117	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C118	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C119	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C120	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C121	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C122	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C123	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C124	1-162-910-91	s	CAP, CERAMIC 5.0PF CH 1608
C125	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C126	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C127	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C128	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C129	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C130	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C131	1-107-781-21	s	CAP, ELECT 47MF
C132	1-107-781-21	s	CAP, ELECT 47MF
C133	1-107-781-21	s	CAP, ELECT 47MF
C134	1-107-781-21	s	CAP, ELECT 47MF
C135	1-107-781-21	s	CAP, ELECT 47MF
C136	1-107-781-21	s	CAP, ELECT 47MF
C143	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C144	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C200	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C201	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C202	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C203	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C204	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C205	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C206	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C207	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C208	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C209	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C210	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C211	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C212	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C213	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C214	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C215	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C216	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C217	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C218	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C219	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C220	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C221	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C222	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C223	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C224	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C225	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C226	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C227	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C228	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608

(CP-399 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C229	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C230	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C231	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C301	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C302	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C303	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C304	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C305	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C307	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C308	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C309	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C310	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C311	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C312	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C313	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C314	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C315	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C316	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C317	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C318	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C319	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C320	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C321	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C322	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C323	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C324	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C325	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C326	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C327	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C328	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C329	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C330	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C331	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
CN10	1-766-727-11	o	SOCKET, D-SUB CONNECTOR 50P
CN11	1-568-676-11	o	CONNECTOR, D-SUB 9P
CN12	1-568-676-11	o	CONNECTOR, D-SUB 9P
CN16	1-568-676-11	o	CONNECTOR, D-SUB 9P
D1	8-719-017-01	s	DIODE 02DZ4.3-TPH3
D2	8-719-801-50	s	DIODE 1SS193-TE85L
D200	8-719-941-84	s	DIODE DA204UT106
D201	8-719-941-84	s	DIODE DA204UT106
D202	8-719-941-84	s	DIODE DA204UT106
D203	8-719-941-84	s	DIODE DA204UT106
D204	8-719-941-84	s	DIODE DA204UT106
D205	8-719-941-84	s	DIODE DA204UT106
D206	8-719-056-65	s	DIODE 1SS372-TE85L
FL301	1-239-896-22	s	FILTER, EMI (SMD)
FL302	1-239-896-22	s	FILTER, EMI (SMD)
FL305	1-239-896-22	s	FILTER, EMI (SMD)
FL306	1-239-896-22	s	FILTER, EMI (SMD)
FL307	1-239-896-22	s	FILTER, EMI (SMD)
FL308	1-239-896-22	s	FILTER, EMI (SMD)
FL309	1-239-896-22	s	FILTER, EMI (SMD)
FL310	1-239-896-22	s	FILTER, EMI (SMD)
FL313	1-239-896-22	s	FILTER, EMI (SMD)
FL314	1-239-896-22	s	FILTER, EMI (SMD)
FL315	1-239-896-22	s	FILTER, EMI (SMD)
FL316	1-239-896-22	s	FILTER, EMI (SMD)

(CP-399 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FL317	1-239-896-22	s	FILTER, EMI (SMD)
FL320	1-239-896-22	s	FILTER, EMI (SMD)
IC100	6-707-884-01	s	IC TC74VHCT04AFT(EKJ)
IC101	8-759-592-08	s	IC AD8056ARMZ-REEL7
IC102	8-759-592-08	s	IC AD8056ARMZ-REEL7
IC103	8-759-592-08	s	IC AD8056ARMZ-REEL7
IC104	6-701-451-01	s	IC SN75121NSR
IC105	6-701-451-01	s	IC SN75121NSR
IC200	6-701-453-01	s	IC SN75207BNSR
IC201	6-701-453-01	s	IC SN75207BNSR
IC202	6-701-453-01	s	IC SN75207BNSR
IC203	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC204	8-759-539-89	s	IC LM2990SX-5.0
IC205	6-705-673-01	s	IC TC7PA53FU(TE85L.F)
IC301	6-707-863-01	s	IC TC74VHC08FT(EKJ)
IC302	6-707-890-01	s	IC TC74VHCT244AFT(EKJ)
IC303	8-759-549-01	s	IC SN74LV125APWR
IC304	6-704-208-01	s	IC S-80845CNUA-B86T2G
IC313	8-759-468-72	s	IC AK6420AM-E2
IC321	8-759-580-22	s	IC LB1721M-TRM-E
IC322	8-759-580-22	s	IC LB1721M-TRM-E
IC323	8-759-580-22	s	IC LB1721M-TRM-E
IC324	8-759-580-22	s	IC LB1721M-TRM-E
IC325	8-759-580-22	s	IC LB1721M-TRM-E
IC326	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC327	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC328	6-702-295-01	s	IC NJM78M12DL1A-TE1
L204	1-410-378-41	s	CHIP INDUCTOR 5.6UH
L205	1-410-378-41	s	CHIP INDUCTOR 5.6UH
L206	1-410-378-41	s	CHIP INDUCTOR 5.6UH
L207	1-410-378-41	s	CHIP INDUCTOR 5.6UH
L210	1-410-378-41	s	CHIP INDUCTOR 5.6UH
L211	1-410-378-41	s	CHIP INDUCTOR 5.6UH
L212	1-416-511-21	s	COIL, CHOKE 47.0UH
L213	1-416-511-21	s	COIL, CHOKE 47.0UH
PS200	⚠ 1-576-259-21	s	RINK, IC (0.6A/72V)
PS300	⚠ 1-576-259-21	s	RINK, IC (0.6A/72V)
Q1	8-729-102-94	s	TRANSISTOR 2SD596-T1DV5
R100	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R101	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R102	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R103	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R106	1-218-847-91	s	RES, CHIP 1.0K (1608)
R107	1-218-847-91	s	RES, CHIP 1.0K (1608)
R108	1-218-847-91	s	RES, CHIP 1.0K (1608)
R109	1-218-847-91	s	RES, CHIP 1.0K (1608)
R110	1-218-847-91	s	RES, CHIP 1.0K (1608)
R111	1-218-847-91	s	RES, CHIP 1.0K (1608)
R112	1-218-845-91	s	RES, CHIP 820 (1608)
R113	1-218-845-91	s	RES, CHIP 820 (1608)
R114	1-218-845-91	s	RES, CHIP 820 (1608)
R115	1-218-845-91	s	RES, CHIP 820 (1608)
R116	1-218-845-91	s	RES, CHIP 820 (1608)
R117	1-218-845-91	s	RES, CHIP 820 (1608)
R118	1-218-847-91	s	RES, CHIP 1.0K (1608)

(CP-399 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R119	1-218-847-91	s	RES, CHIP 1.0K (1608)
R120	1-218-847-91	s	RES, CHIP 1.0K (1608)
R121	1-218-847-91	s	RES, CHIP 1.0K (1608)
R122	1-218-847-91	s	RES, CHIP 1.0K (1608)
R123	1-218-847-91	s	RES, CHIP 1.0K (1608)
R124	1-218-844-91	s	RES, CHIP 750 (1608)
R125	1-218-844-91	s	RES, CHIP 750 (1608)
R126	1-218-844-91	s	RES, CHIP 750 (1608)
R127	1-218-844-91	s	RES, CHIP 750 (1608)
R128	1-218-844-91	s	RES, CHIP 750 (1608)
R129	1-218-844-91	s	RES, CHIP 750 (1608)
R130	1-211-990-91	s	RES, CHIP 75 (1608)
R131	1-211-990-91	s	RES, CHIP 75 (1608)
R132	1-211-990-91	s	RES, CHIP 75 (1608)
R133	1-211-990-91	s	RES, CHIP 75 (1608)
R134	1-211-990-91	s	RES, CHIP 75 (1608)
R135	1-211-990-91	s	RES, CHIP 75 (1608)
R136	1-218-871-91	s	RES, CHIP 10K (1608)
R137	1-218-871-91	s	RES, CHIP 10K (1608)
R138	1-218-871-91	s	RES, CHIP 10K (1608)
R139	1-218-871-91	s	RES, CHIP 10K (1608)
R140	1-218-871-91	s	RES, CHIP 10K (1608)
R141	1-218-871-91	s	RES, CHIP 10K (1608)
R142	1-218-871-91	s	RES, CHIP 10K (1608)
R143	1-218-871-91	s	RES, CHIP 10K (1608)
R144	1-218-871-91	s	RES, CHIP 10K (1608)
R145	1-218-871-91	s	RES, CHIP 10K (1608)
R146	1-218-871-91	s	RES, CHIP 10K (1608)
R147	1-218-871-91	s	RES, CHIP 10K (1608)
R148	1-211-977-91	s	RES, CHIP 22 (1608)
R149	1-218-847-91	s	RES, CHIP 1.0K (1608)
R150	1-218-847-91	s	RES, CHIP 1.0K (1608)
R151	1-211-977-91	s	RES, CHIP 22 (1608)
R152	1-211-977-91	s	RES, CHIP 22 (1608)
R153	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R200	1-211-987-91	s	RES, CHIP 56 (1608)
R201	1-211-987-91	s	RES, CHIP 56 (1608)
R202	1-211-987-91	s	RES, CHIP 56 (1608)
R203	1-211-987-91	s	RES, CHIP 56 (1608)
R204	1-211-990-91	s	RES, CHIP 75 (1608)
R205	1-211-990-91	s	RES, CHIP 75 (1608)
R206	1-211-990-91	s	RES, CHIP 75 (1608)
R207	1-211-990-91	s	RES, CHIP 75 (1608)
R208	1-218-829-91	s	RES, CHIP 180 (1608)
R209	1-218-829-91	s	RES, CHIP 180 (1608)
R210	1-218-829-91	s	RES, CHIP 180 (1608)
R211	1-218-829-91	s	RES, CHIP 180 (1608)
R212	1-211-980-91	s	RES, CHIP 30 (1608)
R213	1-211-980-91	s	RES, CHIP 30 (1608)
R214	1-211-980-91	s	RES, CHIP 30 (1608)
R215	1-211-980-91	s	RES, CHIP 30 (1608)
R216	1-218-823-91	s	RES, CHIP 100 (1608)
R217	1-218-823-91	s	RES, CHIP 100 (1608)
R218	1-218-823-91	s	RES, CHIP 100 (1608)
R219	1-218-823-91	s	RES, CHIP 100 (1608)
R220	1-211-990-91	s	RES, CHIP 75 (1608)
R221	1-211-990-91	s	RES, CHIP 75 (1608)
R222	1-211-990-91	s	RES, CHIP 75 (1608)
R223	1-211-990-91	s	RES, CHIP 75 (1608)

(CP-399 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R228	1-218-847-91	s	RES, CHIP 1.0K (1608)
R229	1-218-847-91	s	RES, CHIP 1.0K (1608)
R230	1-218-847-91	s	RES, CHIP 1.0K (1608)
R231	1-218-847-91	s	RES, CHIP 1.0K (1608)
R232	1-211-977-91	s	RES, CHIP 22 (1608)
R233	1-211-977-91	s	RES, CHIP 22 (1608)
R234	1-211-977-91	s	RES, CHIP 22 (1608)
R235	1-211-977-91	s	RES, CHIP 22 (1608)
R236	1-211-987-91	s	RES, CHIP 56 (1608)
R237	1-211-987-91	s	RES, CHIP 56 (1608)
R238	1-211-990-91	s	RES, CHIP 75 (1608)
R239	1-211-990-91	s	RES, CHIP 75 (1608)
R240	1-218-829-91	s	RES, CHIP 180 (1608)
R241	1-218-829-91	s	RES, CHIP 180 (1608)
R242	1-211-980-91	s	RES, CHIP 30 (1608)
R243	1-211-980-91	s	RES, CHIP 30 (1608)
R244	1-218-823-91	s	RES, CHIP 100 (1608)
R245	1-218-823-91	s	RES, CHIP 100 (1608)
R246	1-211-990-91	s	RES, CHIP 75 (1608)
R247	1-211-990-91	s	RES, CHIP 75 (1608)
R252	1-211-977-91	s	RES, CHIP 22 (1608)
R253	1-211-977-91	s	RES, CHIP 22 (1608)
R254	1-218-867-91	s	RES, CHIP 6.8K (1608)
R255	1-218-847-91	s	RES, CHIP 1.0K (1608)
R256	1-218-843-91	s	RES, CHIP 680 (1608)
R300	1-211-977-91	s	RES, CHIP 22 (1608)
R301	1-218-887-91	s	RES, CHIP 47K (1608)
R302	1-218-823-91	s	RES, CHIP 100 (1608)
R303	1-218-887-91	s	RES, CHIP 47K (1608)
R304	1-218-823-91	s	RES, CHIP 100 (1608)
R305	1-218-887-91	s	RES, CHIP 47K (1608)
R306	1-218-895-91	s	RES, CHIP 100K (1608)
R307	1-218-887-91	s	RES, CHIP 47K (1608)
R308	1-218-823-91	s	RES, CHIP 100 (1608)
R309	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R310	1-218-863-91	s	RES, CHIP 4.7K (1608)
R311	1-218-863-91	s	RES, CHIP 4.7K (1608)
R312	1-218-887-91	s	RES, CHIP 47K (1608)
R313	1-218-863-91	s	RES, CHIP 4.7K (1608)
R314	1-218-863-91	s	RES, CHIP 4.7K (1608)
R315	1-218-887-91	s	RES, CHIP 47K (1608)
R316	1-218-863-91	s	RES, CHIP 4.7K (1608)
R317	1-218-863-91	s	RES, CHIP 4.7K (1608)
R318	1-218-863-91	s	RES, CHIP 4.7K (1608)
R319	1-218-863-91	s	RES, CHIP 4.7K (1608)
R320	1-218-863-91	s	RES, CHIP 4.7K (1608)
R321	1-218-863-91	s	RES, CHIP 4.7K (1608)
R322	1-218-883-91	s	RES, CHIP 33K (1608)
R323	1-218-887-91	s	RES, CHIP 47K (1608)
RB300	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB301	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB302	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB310	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB311	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB312	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB313	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB314	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB315	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB316	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(CP-399 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB317	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB318	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB319	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB320	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB321	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB322	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB323	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RY1	1-755-379-21	s	RELAY
RY2	1-755-379-21	s	RELAY
X300	1-795-789-21	s	PIEZ0ELECTRIC OSCILLATOR

CP-405 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1771-417-A	s	MOUNTED CIRCUIT BOARD, CP-405
BZ1	1-825-579-11	s	BUZZER, PIEZOELECTRIC
C3	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C4	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C5	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C6	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C7	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C8	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C9	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C10	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C12	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C13	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C14	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C15	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C16	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C17	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C18	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C19	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C20	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C21	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C22	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C23	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C24	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C25	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C26	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C27	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C28	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C29	1-116-113-11	s	CAP, ELECT 100MF 105
C30	1-164-870-81	s	CAP, CHIP CERAMIC 68PF CH 1005
C31	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C32	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C33	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C37	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C38	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C39	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C41	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C42	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C43	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C44	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C45	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C46	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C304	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C305	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C308	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C309	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C316	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C329	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C330	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C331	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C332	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C335	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C336	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C337	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C341	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C343	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C346	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C347	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C349	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C350	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C351	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C354	1-107-418-21	s	CAP, CHIP ELECT 10MF
C355	1-107-418-21	s	CAP, CHIP ELECT 10MF
C356	1-107-418-21	s	CAP, CHIP ELECT 10MF
C357	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C358	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C359	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C360	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C361	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C362	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C363	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C364	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C365	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C368	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C369	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C371	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C372	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C373	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C374	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C375	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C376	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C377	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C378	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C379	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C380	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C381	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C382	1-116-113-11	s	CAP, ELECT 100MF 105
C383	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C384	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C385	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C386	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C387	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C388	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C389	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C390	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C391	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C403	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C408	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C410	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C415	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C416	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C417	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C418	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C419	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C700	1-112-808-11	s	CAP, ELECT 220MF
C701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C702	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C704	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C707	1-112-807-11	s	CAP, ELECT 100MF
C708	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C709	1-128-536-21	s	CAP, CHIP ELECT 100MF
C711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C712	1-128-536-21	s	CAP, CHIP ELECT 100MF
C714	1-125-898-91	s	CAP, CERAMIC 0.22MF B (3216)
C715	1-114-250-21	s	CAP, ELECT 150MF (8X6.9)
C716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C720	1-128-536-21	s	CAP, CHIP ELECT 100MF
C721	1-116-113-11	s	CAP, ELECT 100MF 105
C722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C723	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C724	1-112-807-11	s	CAP, ELECT 100MF
C725	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C726	1-112-807-11	s	CAP, ELECT 100MF
C727	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C729	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C730	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C732	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C733	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C734	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C735	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C738	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C741	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C745	1-112-808-11	s	CAP, ELECT 220MF
C748	1-128-536-21	s	CAP, CHIP ELECT 100MF
C749	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C750	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C755	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C757	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C758	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C759	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C760	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C761	1-114-728-91	o	CAP, CERAMIC 22MF B 3216
C762	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C763	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C765	1-116-113-11	s	CAP, ELECT 100MF 105
C766	1-116-113-11	s	CAP, ELECT 100MF 105
C767	1-165-629-91	s	CAP, CERAMIC 1000000PF B(3225)
C768	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C769	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C772	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C773	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C775	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C776	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C779	1-107-418-21	s	CAP, CHIP ELECT 10MF
C780	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C781	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C782	1-116-113-11	s	CAP, ELECT 100MF 105
C784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C785	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C786	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C787	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C788	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C791	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C792	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C793	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C957	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C965	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C966	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C967	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C968	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C969	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C970	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C971	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C972	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C973	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C974	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C975	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C976	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C977	1-114-564-11	o	CAP, CERAMIC 4.7MF C 3225
CN1	1-695-889-21	s	PIN, CONNECTOR (PC BOARD) 10P
CN3	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN303	1-785-427-11	o	CONNECTOR, BOARD TO WIRE 20P
CN304	1-785-125-21	s	CONNECTOR 6P
CN502	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P
CN700	1-695-223-21	s	PIN, CONNECTOR (SMD) 10P
CN701	1-793-807-21	o	PIN, CONNECTOR (WITH PWB) 20P
CN800	1-573-931-71	s	CONNECTOR, FFC/FPC (ZIF) 22P
CN951	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D500	6-502-197-01	s	DI SML-D12M8WT86SM
D501	6-502-197-01	s	DI SML-D12M8WT86SM
D502	6-502-197-01	s	DI SML-D12M8WT86SM
D503	6-502-598-01	s	DI SML-D12U8WT86
D704	8-719-066-16	s	DIODE RB491D-T146
D706	6-501-361-01	s	DIODE RB051LA-40TR
D707	8-719-071-34	s	DIODE RB521S-30-TE61
D708	6-501-361-01	s	DIODE RB051LA-40TR
D709	8-719-071-34	s	DIODE RB521S-30-TE61
D710	8-719-083-83	s	DI UDZSUSTE-1715B
D711	6-501-361-01	s	DIODE RB051LA-40TR
D712	8-719-079-92	s	DIODE 1SR159-200TE25
D713	6-501-361-01	s	DIODE RB051LA-40TR
D714	8-719-079-92	s	DIODE 1SR159-200TE25
D715	6-501-361-01	s	DIODE RB051LA-40TR
D716	6-501-361-01	s	DIODE RB051LA-40TR
D717	6-501-361-01	s	DIODE RB051LA-40TR
D718	6-501-361-01	s	DIODE RB051LA-40TR
D900	6-502-197-01	s	DI SML-D12M8WT86SM
D901	6-501-361-01	s	DIODE RB051LA-40TR
E200	1-535-877-22	s	CHIP, CHECKER
E201	1-535-877-22	s	CHIP, CHECKER
E300	1-535-877-22	s	CHIP, CHECKER
E301	1-535-877-22	s	CHIP, CHECKER
E302	1-535-877-22	s	CHIP, CHECKER
E700	1-535-877-22	s	CHIP, CHECKER
E701	1-535-877-22	s	CHIP, CHECKER
E900	1-535-877-22	s	CHIP, CHECKER
F700	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F701	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
FB1	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB3	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-580-21	s	FERRITE, EMI (SMD)
FB309	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB310	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB329	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB330	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB331	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB332	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB333	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB718	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB719	1-400-832-21	s	SMD EMI FERRITE
FB720	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB721	1-400-580-21	s	FERRITE, EMI (SMD)
FB722	1-400-580-21	s	FERRITE, EMI (SMD)
FB723	1-400-832-21	s	SMD EMI FERRITE
FB724	1-400-832-21	s	SMD EMI FERRITE
FB725	1-400-832-21	s	SMD EMI FERRITE

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB726	1-400-832-21	s	SMD EMI FERRITE
FB727	1-400-832-21	s	SMD EMI FERRITE
FB728	1-400-832-21	s	SMD EMI FERRITE
FB729	1-400-832-21	s	SMD EMI FERRITE
FB730	1-400-832-21	s	SMD EMI FERRITE
FB731	1-400-832-21	s	SMD EMI FERRITE
FB732	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB800	1-400-832-21	s	SMD EMI FERRITE
FB801	1-400-832-21	s	SMD EMI FERRITE
FB802	1-400-832-21	s	SMD EMI FERRITE
FB803	1-400-832-21	s	SMD EMI FERRITE
FB804	1-400-832-21	s	SMD EMI FERRITE
FB805	1-400-832-21	s	SMD EMI FERRITE
FB806	1-400-832-21	s	SMD EMI FERRITE
FB807	1-400-832-21	s	SMD EMI FERRITE
FB808	1-400-832-21	s	SMD EMI FERRITE
FB809	1-400-832-21	s	SMD EMI FERRITE
FB810	1-400-832-21	s	SMD EMI FERRITE
FB811	1-400-832-21	s	SMD EMI FERRITE
FB812	1-400-832-21	s	SMD EMI FERRITE
FB813	1-400-832-21	s	SMD EMI FERRITE
FB814	1-400-832-21	s	SMD EMI FERRITE
FB815	1-400-832-21	s	SMD EMI FERRITE
FB816	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB817	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB818	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB819	1-400-832-21	s	SMD EMI FERRITE
FB820	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB821	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB822	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB823	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB824	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB825	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB826	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB827	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB828	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB829	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB830	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB831	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB832	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB833	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB834	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB835	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB836	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB837	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB900	1-400-832-21	s	SMD EMI FERRITE
IC4	6-714-013-01	s	IC AK6416CM-E2
IC5	6-700-655-01	s	IC LT1963ES8#TR
IC6	6-708-277-01	s	IC CDCVF25081PWR
IC200	6-713-754-01	s	IC W9864G6IH-6J-ER10
IC201	6-713-754-01	s	IC W9864G6IH-6J-ER10
IC203	6-713-754-01	s	IC W9864G6IH-6J-ER10
IC204	6-713-754-01	s	IC W9864G6IH-6J-ER10
IC205	6-808-528-01	s	IC MX29LV160DBTI-70G
IC207	6-808-528-01	s	IC MX29LV160DBTI-70G
IC208	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC302	6-707-886-01	s	IC TC74VHCT125AFT(EKJ)
IC303	6-710-009-01	s	IC MD56V62320K-75TAZN3B

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC304	8-759-672-76	s	IC AK9813BF-E2
IC305	8-759-392-65	s	IC AD828ARZ-REEL
IC306	8-752-371-55	s	IC CXD2302Q-T4
IC307	8-759-392-65	s	IC AD828ARZ-REEL
IC308	8-759-669-45	s	IC TL062CPWR-12
IC309	8-759-669-45	s	IC TL062CPWR-12
IC310	8-752-371-55	s	IC CXD2302Q-T4
IC311	8-752-371-55	s	IC CXD2302Q-T4
IC314	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC315	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC316	6-708-277-01	s	IC CDCVF25081PWR
IC320	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC321	6-713-856-01	s	IC THC63LVDM83D-T
IC503	6-713-799-01	s	IC BU7122KV-E2
IC504	6-713-799-01	s	IC BU7122KV-E2
IC700	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC701	8-759-650-39	s	IC LT1374IS8#TR
IC702	8-759-650-39	s	IC LT1374IS8#TR
IC706	6-700-792-01	s	IC NJM78M09DL1A(TE1)
IC708	8-759-395-10	s	IC MAX764CSA+TG068
IC709	6-704-164-01	s	IC S-80845CLUA-B66T2G
IC710	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC711	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC712	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC713	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC715	8-759-437-63	s	IC TD62308AFG(EL)
IC716	8-759-437-39	s	IC MB3771PF-ER
IC717	6-701-543-01	s	IC SN75C1168NSR
IC720	8-759-597-82	s	IC UPD4702G-E2
IC721	8-759-597-82	s	IC UPD4702G-E2
IC722	6-707-850-01	s	IC TC74LCX245FT(EKJ)
IC723	6-711-333-01	s	IC DS92LV1212AMSAX
IC724	8-759-597-57	s	IC LTC1628CG#TR
IC800	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC801	8-759-578-68	s	IC SN74LVCC4245APWR
IC951	6-707-853-01	s	IC TC74LCX541FT(EKJ)
IC953	8-759-475-49	s	IC TC74LCX257FT(EL)
IC955	6-715-442-01	s	IC BD6583MUV-AE2
JC16	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC17	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC18	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
JC19	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
L300	1-813-308-11	o	COMMON MODE CHOKE
L301	1-813-308-11	o	COMMON MODE CHOKE
L302	1-813-308-11	o	COMMON MODE CHOKE
L303	1-813-308-11	o	COMMON MODE CHOKE
L304	1-813-308-11	o	COMMON MODE CHOKE
L700	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L701	1-400-161-21	s	INDUCTOR 1.2UH
L702	1-400-161-21	s	INDUCTOR 1.2UH
L705	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L707	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L709	1-469-529-21	s	INDUCTOR, (SMD) 10UH
L710	1-469-529-21	s	INDUCTOR, (SMD) 10UH
L712	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L900	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
Q1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q501	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q502	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q503	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q504	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q700	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q702	6-551-892-01	s	TR SI4430BDY-T1-E3
Q703	6-551-892-01	s	TR SI4430BDY-T1-E3
Q704	6-551-892-01	s	TR SI4430BDY-T1-E3
Q705	6-551-892-01	s	TR SI4430BDY-T1-E3
Q706	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q707	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q710	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q711	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q900	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q901	6-552-086-01	s	TR RTR020N05TL
R1	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3	1-208-919-81	s	RES, CHIP 22K (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-208-919-81	s	RES, CHIP 22K (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-208-863-81	s	RES, CHIP 100 (1005)
R9	1-208-919-81	s	RES, CHIP 22K (1005)
R10	1-208-855-81	s	RES, CHIP 47 (1005)
R11	1-220-878-81	s	RES, CHIP 22 (1005)
R12	1-220-884-81	s	RES, CHIP 39 (1005)
R13	1-220-878-81	s	RES, CHIP 22 (1005)
R14	1-220-878-81	s	RES, CHIP 22 (1005)
R15	1-220-878-81	s	RES, CHIP 22 (1005)
R17	1-208-911-81	s	RES, CHIP 10K (1005)
R18	1-208-855-81	s	RES, CHIP 47 (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-208-895-81	s	RES, CHIP 2.2K (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-220-878-81	s	RES, CHIP 22 (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-911-81	s	RES, CHIP 10K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R31	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R32	1-220-878-81	s	RES, CHIP 22 (1005)
R33	1-208-919-81	s	RES, CHIP 22K (1005)
R34	1-208-919-81	s	RES, CHIP 22K (1005)
R35	1-208-919-81	s	RES, CHIP 22K (1005)
R36	1-208-919-81	s	RES, CHIP 22K (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-919-81	s	RES, CHIP 22K (1005)
R40	1-208-919-81	s	RES, CHIP 22K (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R90	1-208-911-81	s	RES, CHIP 10K (1005)
R100	1-208-919-81	s	RES, CHIP 22K (1005)
R113	1-208-919-81	s	RES, CHIP 22K (1005)
R115	1-208-919-81	s	RES, CHIP 22K (1005)
R117	1-208-919-81	s	RES, CHIP 22K (1005)
R130	1-208-919-81	s	RES, CHIP 22K (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-208-935-81	s	RES, CHIP 100K (1005)
R143	1-208-905-81	s	RES, CHIP 5.6K (1005)
R144	1-208-910-81	s	RES, CHIP 9.1K (1005)
R145	1-208-911-81	s	RES, CHIP 10K (1005)
R146	1-208-919-81	s	RES, CHIP 22K (1005)
R148	1-208-879-81	s	RES, CHIP 470 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-208-919-81	s	RES, CHIP 22K (1005)
R200	1-208-935-81	s	RES, CHIP 100K (1005)
R201	1-208-935-81	s	RES, CHIP 100K (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-220-878-81	s	RES, CHIP 22 (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-208-935-81	s	RES, CHIP 100K (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-208-935-81	s	RES, CHIP 100K (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-208-855-81	s	RES, CHIP 47 (1005)
R312	1-208-863-81	s	RES, CHIP 100 (1005)
R313	1-208-855-81	s	RES, CHIP 47 (1005)
R314	1-220-878-81	s	RES, CHIP 22 (1005)
R315	1-208-895-81	s	RES, CHIP 2.2K (1005)
R316	1-208-887-81	s	RES, CHIP 1.0K (1005)
R317	1-208-887-81	s	RES, CHIP 1.0K (1005)
R318	1-208-895-81	s	RES, CHIP 2.2K (1005)
R321	1-208-911-81	s	RES, CHIP 10K (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-220-878-81	s	RES, CHIP 22 (1005)
R325	1-220-878-81	s	RES, CHIP 22 (1005)
R326	1-220-878-81	s	RES, CHIP 22 (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R328	1-220-878-81	s	RES, CHIP 22 (1005)
R329	1-220-878-81	s	RES, CHIP 22 (1005)
R330	1-208-863-81	s	RES, CHIP 100 (1005)
R331	1-208-875-81	s	RES, CHIP 330 (1005)
R332	1-208-863-81	s	RES, CHIP 100 (1005)
R333	1-220-878-81	s	RES, CHIP 22 (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-220-878-81	s	RES, CHIP 22 (1005)
R336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R338	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R342	1-208-895-81	s	RES, CHIP 2.2K (1005)
R343	1-220-878-81	s	RES, CHIP 22 (1005)
R344	1-220-878-81	s	RES, CHIP 22 (1005)
R346	1-220-878-81	s	RES, CHIP 22 (1005)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R347	1-220-878-81	s	RES, CHIP 22 (1005)
R348	1-220-878-81	s	RES, CHIP 22 (1005)
R349	1-220-878-81	s	RES, CHIP 22 (1005)
R350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R351	1-208-895-81	s	RES, CHIP 2.2K (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-208-863-81	s	RES, CHIP 100 (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R359	1-220-878-81	s	RES, CHIP 22 (1005)
R360	1-220-878-81	s	RES, CHIP 22 (1005)
R361	1-208-855-81	s	RES, CHIP 47 (1005)
R362	1-208-855-81	s	RES, CHIP 47 (1005)
R363	1-208-927-81	s	RES, CHIP 47K (1005)
R364	1-208-911-81	s	RES, CHIP 10K (1005)
R365	1-220-878-81	s	RES, CHIP 22 (1005)
R366	1-220-878-81	s	RES, CHIP 22 (1005)
R367	1-208-863-81	s	RES, CHIP 100 (1005)
R368	1-220-878-81	s	RES, CHIP 22 (1005)
R369	1-220-878-81	s	RES, CHIP 22 (1005)
R370	1-208-863-81	s	RES, CHIP 100 (1005)
R371	1-208-887-81	s	RES, CHIP 1.0K (1005)
R372	1-208-887-81	s	RES, CHIP 1.0K (1005)
R373	1-208-887-81	s	RES, CHIP 1.0K (1005)
R374	1-220-878-81	s	RES, CHIP 22 (1005)
R375	1-220-878-81	s	RES, CHIP 22 (1005)
R376	1-208-863-81	s	RES, CHIP 100 (1005)
R377	1-208-863-81	s	RES, CHIP 100 (1005)
R378	1-220-878-81	s	RES, CHIP 22 (1005)
R379	1-208-863-81	s	RES, CHIP 100 (1005)
R380	1-208-875-81	s	RES, CHIP 330 (1005)
R381	1-220-878-81	s	RES, CHIP 22 (1005)
R382	1-208-875-81	s	RES, CHIP 330 (1005)
R383	1-208-927-81	s	RES, CHIP 47K (1005)
R384	1-208-927-81	s	RES, CHIP 47K (1005)
R385	1-208-911-81	s	RES, CHIP 10K (1005)
R386	1-208-911-81	s	RES, CHIP 10K (1005)
R387	1-220-878-81	s	RES, CHIP 22 (1005)
R389	1-220-878-81	s	RES, CHIP 22 (1005)
R390	1-220-878-81	s	RES, CHIP 22 (1005)
R392	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R393	1-208-855-81	s	RES, CHIP 47 (1005)
R394	1-208-863-81	s	RES, CHIP 100 (1005)
R395	1-208-863-81	s	RES, CHIP 100 (1005)
R396	1-208-959-81	s	RES, CHIP 1M (1005)
R397	1-208-959-81	s	RES, CHIP 1M (1005)
R398	1-208-959-81	s	RES, CHIP 1M (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-863-81	s	RES, CHIP 100 (1005)
R403	1-208-959-81	s	RES, CHIP 1M (1005)
R404	1-208-919-81	s	RES, CHIP 22K (1005)
R405	1-208-870-81	s	RES, CHIP 200 (1005)
R406	1-208-879-81	s	RES, CHIP 470 (1005)
R407	1-208-903-81	s	RES, CHIP 4.7K (1005)
R408	1-208-875-81	s	RES, CHIP 330 (1005)
R409	1-208-875-81	s	RES, CHIP 330 (1005)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R411	1-220-870-81	s	RES, CHIP 10 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-208-959-81	s	RES, CHIP 1M (1005)
R415	1-208-959-81	s	RES, CHIP 1M (1005)
R416	1-208-927-81	s	RES, CHIP 47K (1005)
R417	1-208-927-81	s	RES, CHIP 47K (1005)
R418	1-208-927-81	s	RES, CHIP 47K (1005)
R419	1-208-887-81	s	RES, CHIP 1.0K (1005)
R420	1-208-887-81	s	RES, CHIP 1.0K (1005)
R421	1-208-883-81	s	RES, CHIP 680 (1005)
R422	1-208-883-81	s	RES, CHIP 680 (1005)
R453	1-208-883-81	s	RES, CHIP 680 (1005)
R454	1-208-887-81	s	RES, CHIP 1.0K (1005)
R455	1-220-870-81	s	RES, CHIP 10 (1005)
R456	1-208-888-81	s	RES, CHIP 1.1K (1005)
R457	1-208-894-81	s	RES, CHIP 2.0K (1005)
R458	1-208-875-81	s	RES, CHIP 330 (1005)
R460	1-208-911-81	s	RES, CHIP 10K (1005)
R461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R464	1-220-878-81	s	RES, CHIP 22 (1005)
R465	1-220-878-81	s	RES, CHIP 22 (1005)
R466	1-220-878-81	s	RES, CHIP 22 (1005)
R467	1-220-878-81	s	RES, CHIP 22 (1005)
R468	1-220-878-81	s	RES, CHIP 22 (1005)
R469	1-220-878-81	s	RES, CHIP 22 (1005)
R470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R471	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R473	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R480	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R500	1-208-863-81	s	RES, CHIP 100 (1005)
R522	1-208-935-81	s	RES, CHIP 100K (1005)
R523	1-208-935-81	s	RES, CHIP 100K (1005)
R524	1-208-935-81	s	RES, CHIP 100K (1005)
R525	1-208-935-81	s	RES, CHIP 100K (1005)
R526	1-208-863-81	s	RES, CHIP 100 (1005)
R527	1-208-863-81	s	RES, CHIP 100 (1005)
R528	1-208-863-81	s	RES, CHIP 100 (1005)
R530	1-208-863-81	s	RES, CHIP 100 (1005)
R532	1-208-935-81	s	RES, CHIP 100K (1005)
R533	1-208-935-81	s	RES, CHIP 100K (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-220-878-81	s	RES, CHIP 22 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R710	1-208-863-81	s	RES, CHIP 100 (1005)
R714	1-220-870-81	s	RES, CHIP 10 (1005)
R715	1-208-935-81	s	RES, CHIP 100K (1005)
R716	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R718	1-208-911-81	s	RES, CHIP 10K (1005)
R719	1-208-911-81	s	RES, CHIP 10K (1005)
R720	1-208-911-81	s	RES, CHIP 10K (1005)
R722	1-218-985-81	s	RES, CHIP 470K
R723	1-208-935-81	s	RES, CHIP 100K (1005)
R724	1-208-927-81	s	RES, CHIP 47K (1005)
R725	1-208-911-81	s	RES, CHIP 10K (1005)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R727	1-208-935-81	s	RES, CHIP 100K (1005)
R728	1-208-935-81	s	RES, CHIP 100K (1005)
R729	1-208-863-81	s	RES, CHIP 100 (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R736	1-208-935-81	s	RES, CHIP 100K (1005)
R737	1-208-935-81	s	RES, CHIP 100K (1005)
R738	1-208-927-81	s	RES, CHIP 47K (1005)
R739	1-208-927-81	s	RES, CHIP 47K (1005)
R740	1-208-913-81	s	RES, CHIP 12K (1005)
R741	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-863-81	s	RES, CHIP 100 (1005)
R749	1-208-919-81	s	RES, CHIP 22K (1005)
R754	1-208-919-81	s	RES, CHIP 22K (1005)
R755	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R757	1-208-919-81	s	RES, CHIP 22K (1005)
R758	1-208-919-81	s	RES, CHIP 22K (1005)
R759	1-208-919-81	s	RES, CHIP 22K (1005)
R761	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R762	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R765	1-208-911-81	s	RES, CHIP 10K (1005)
R766	1-208-871-81	s	RES, CHIP 220 (1005)
R767	1-208-919-81	s	RES, CHIP 22K (1005)
R768	1-208-919-81	s	RES, CHIP 22K (1005)
R769	1-208-903-81	s	RES, CHIP 4.7K (1005)
R770	1-208-863-81	s	RES, CHIP 100 (1005)
R771	1-208-919-81	s	RES, CHIP 22K (1005)
R772	1-208-919-81	s	RES, CHIP 22K (1005)
R773	1-208-935-81	s	RES, CHIP 100K (1005)
R774	1-208-911-81	s	RES, CHIP 10K (1005)
R775	1-208-918-81	s	RES, CHIP 20K (1005)
R776	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R779	1-208-911-81	s	RES, CHIP 10K (1005)
R780	1-208-903-81	s	RES, CHIP 4.7K (1005)
R781	1-208-903-81	s	RES, CHIP 4.7K (1005)
R782	1-208-887-81	s	RES, CHIP 1.0K (1005)
R783	1-208-879-81	s	RES, CHIP 470 (1005)
R784	1-208-943-81	s	RES, CHIP 220K (1005)
R786	1-208-913-81	s	RES, CHIP 12K (1005)
R787	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R790	1-208-863-81	s	RES, CHIP 100 (1005)
R791	1-208-863-81	s	RES, CHIP 100 (1005)
R792	1-208-863-81	s	RES, CHIP 100 (1005)
R793	1-208-863-81	s	RES, CHIP 100 (1005)
R794	1-208-863-81	s	RES, CHIP 100 (1005)
R800	1-208-935-81	s	RES, CHIP 100K (1005)
R801	1-208-935-81	s	RES, CHIP 100K (1005)
R802	1-208-927-81	s	RES, CHIP 47K (1005)
R803	1-208-927-81	s	RES, CHIP 47K (1005)
R804	1-208-927-81	s	RES, CHIP 47K (1005)
R805	1-208-927-81	s	RES, CHIP 47K (1005)
R806	1-208-911-81	s	RES, CHIP 10K (1005)
R807	1-208-911-81	s	RES, CHIP 10K (1005)
R808	1-218-634-91	s	RES, METAL FILM (CHIP) 470
R809	1-218-634-91	s	RES, METAL FILM (CHIP) 470
R811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R837	1-208-935-81	s	RES, CHIP 100K (1005)
R838	1-220-878-81	s	RES, CHIP 22 (1005)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R839	1-220-878-81	s	RES, CHIP 22 (1005)
R940	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R941	1-220-878-81	s	RES, CHIP 22 (1005)
R951	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R952	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R953	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R954	1-208-887-81	s	RES, CHIP 1.0K (1005)
R955	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R960	1-220-878-81	s	RES, CHIP 22 (1005)
R961	1-220-878-81	s	RES, CHIP 22 (1005)
R962	1-220-878-81	s	RES, CHIP 22 (1005)
R963	1-220-878-81	s	RES, CHIP 22 (1005)
R964	1-220-878-81	s	RES, CHIP 22 (1005)
R965	1-220-878-81	s	RES, CHIP 22 (1005)
R977	1-220-878-81	s	RES, CHIP 22 (1005)
R978	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-208-911-81	s	RES, CHIP 10K (1005)
R983	1-220-870-81	s	RES, CHIP 10 (1005)
R984	1-208-887-81	s	RES, CHIP 1.0K (1005)
R985	1-208-911-81	s	RES, CHIP 10K (1005)
R986	1-208-863-81	s	RES, CHIP 100 (1005)
R987	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R997	1-208-935-81	s	RES, CHIP 100K (1005)
R998	1-208-911-81	s	RES, CHIP 10K (1005)
R999	1-208-919-81	s	RES, CHIP 22K (1005)
R1000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1002	1-208-935-81	s	RES, CHIP 100K (1005)
R1003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB21	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB22	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB23	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB24	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB25	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB26	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB27	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB33	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB34	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB35	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB36	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB37	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB38	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB39	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB111	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB112	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB200	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(CP-405 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB201	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB301	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB315	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB316	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB317	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB318	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB319	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB320	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB321	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB323	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB324	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB325	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB326	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB327	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB328	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB329	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB701	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB702	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB703	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB704	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB705	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB706	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB901	1-234-379-21	s	RES, NETWORK 22K (1005X4)
S1	1-692-271-41	s	SWITCH, SLIDE
S2	1-692-271-41	s	SWITCH, SLIDE
S700	1-786-277-21	s	SWITCH, TACTILE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP103	1-535-877-22	s	CHIP, CHECKER
TP300	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP302	1-535-877-22	s	CHIP, CHECKER
TP303	1-535-877-22	s	CHIP, CHECKER
TP304	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP951	1-535-877-22	s	CHIP, CHECKER
TP952	1-535-877-22	s	CHIP, CHECKER
TP953	1-535-877-22	s	CHIP, CHECKER
TP954	1-535-877-22	s	CHIP, CHECKER
X2	1-814-010-11	s	OSCILLATOR, CRYSTAL(16.384MHZ)
X3	1-813-264-11	s	OSCILLATOR, CRYSTAL
X300	1-813-480-11	s	OSCILLATOR, CRYSTAL

CUE-13 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8327-129-A	o	MOUNTED CIRCUIT BOARD, CUE-13
1pc	3-629-688-01	o	SHIELD CASE(U),CUE
1pc	3-629-689-01	o	SHIELD CASE(B),CUE
C100	1-128-936-21	s	CAPACITOR,ELECT (NONPOLAR)22MF
C101	1-128-936-21	s	CAPACITOR,ELECT (NONPOLAR)22MF
C102	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C103	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C104	1-127-692-11	s	CAP, CHIP CERAMIC 10MF B 3216
C105	1-127-692-11	s	CAP, CHIP CERAMIC 10MF B 3216
C106	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C107	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C109	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C110	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C111	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C112	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C113	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C114	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C115	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C116	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C117	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C118	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C119	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C120	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C121	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C122	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C123	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C124	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C125	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C126	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C127	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C128	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C130	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C131	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C132	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C133	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C134	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C135	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C136	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C137	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C139	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C140	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C141	1-125-889-11	s	CAPACITOR, C.CERAMIC 2.2MF
C142	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C143	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C144	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C145	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C146	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C147	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C148	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C149	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C150	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C151	1-115-153-11	s	CAPACITOR,ELECT 4.7MF/16V(BP)
C152	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C153	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C154	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C155	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C156	1-127-573-11	s	CAPACITOR,CERAMIC 1MFB(2012)
C158	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(CUE-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C159	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C160	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C161	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C162	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C163	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C164	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C165	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C166	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C167	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C168	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C169	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C170	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C171	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C174	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C175	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C176	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C177	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C300	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C301	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C304	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C305	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C307	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C309	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C310	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C311	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C312	1-126-399-11	s	CAPACITOR ELECT 10MF/35V(CHIP)
C313	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C314	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C315	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
CN100	1-569-465-11	o	PIN, DIN CONNECTOR (DIP) 48P
D100	8-719-024-81	s	DIODE 1SS300-TE85L
D102	8-719-421-69	s	DIODE MA133
D103	8-719-421-69	s	DIODE MA133
D107	8-719-820-41	s	DIODE 1SS302
D108	8-719-820-41	s	DIODE 1SS302
D109	8-719-820-41	s	DIODE 1SS302
D112	8-719-024-81	s	DIODE 1SS300-TE85L
D113	8-719-421-69	s	DIODE MA133
D114	8-719-421-69	s	DIODE MA133
D115	8-719-820-41	s	DIODE 1SS302
D300	8-719-975-40	s	DIODE RB411D (RECTI)
D301	8-719-975-40	s	DIODE RB411D (RECTI)
E100	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E103	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC100	8-759-711-85	s	IC NJM4580E-D
IC101	8-759-112-66	s	IC UPC812G2
IC102	8-759-112-66	s	IC UPC812G2
IC103	8-759-711-85	s	IC NJM4580E-D
IC104	8-759-711-85	s	IC NJM4580E-D
IC105	8-759-596-42	s	IC THAT2181SC-TE2
IC106	8-759-596-42	s	IC THAT2181SC-TE2
IC107	8-759-422-21	s	IC NJM4580VTE2
IC108	8-759-422-21	s	IC NJM4580VTE2

(CUE-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC109	8-759-422-21	s	IC NJM4580VTE2
IC110	8-759-711-85	s	IC NJM4580E-D
IC111	8-759-112-66	s	IC UPC812G2
IC112	8-759-422-21	s	IC NJM4580VTE2
IC113	8-759-711-85	s	IC NJM4580E-D
IC114	8-759-700-96	s	IC NJM5534M
IC115	8-759-700-96	s	IC NJM5534M
IC116	8-759-700-96	s	IC NJM5534M
IC117	8-759-422-21	s	IC NJM4580VTE2
IC118	8-759-700-96	s	IC NJM5534M
IC119	8-759-422-21	s	IC NJM4580VTE2
IC120	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC121	8-759-392-01	s	IC TC7SH86FU (TE85R)
IC300	8-759-533-85	s	IC L88M05T-FA-TL
IC301	8-759-539-89	s	IC LM2990SX-5.0
IC303	8-759-549-15	s	IC SN74LV245APWR
IC304	8-759-497-38	s	IC LTC1458CG-E2
L300	1-416-345-11	s	COIL, CHOKE 22UH
PS300	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS301	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS302	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q100	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q102	8-729-928-19	s	TRANSISTOR 2SA1774R
Q104	8-729-928-81	s	TRANSISTOR DTC144EE
Q105	8-729-928-19	s	TRANSISTOR 2SA1774R
Q106	8-729-203-32	s	TRANSISTOR 2SJ106BL
Q107	8-729-205-38	s	TRANSISTOR 2SK208-Y
Q108	8-729-159-65	s	TRANSISTOR 2SD596-DV5
Q109	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q110	8-729-928-81	s	TRANSISTOR DTC144EE
R100	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R101	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R102	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R103	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R104	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R105	1-245-299-91	s	RESISTOR, CHIP 10K
R106	1-245-299-91	s	RESISTOR, CHIP 10K
R111	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R112	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R113	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R114	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R115	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R116	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R117	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R118	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R119	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/10W(1608)
R120	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R121	1-211-977-11	s	RESISTOR,CHIP 22 1/10W (1608)
R122	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R123	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R124	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R125	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R126	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R127	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R128	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R129	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R132	1-245-439-91	s	RESISTOR, CHIP 4700(1608)

(CUE-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R133	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R134	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R136	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R137	1-218-881-11	s	RESISTOR, CHIP 27K 1/10W(1608)
R138	1-218-881-11	s	RESISTOR, CHIP 27K 1/10W(1608)
R139	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R140	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R141	1-218-873-11	s	RESISTOR,CHIP 12K 1/10W (1608)
R142	1-245-438-91	s	RESISTOR, CHIP 2700(1608)
R143	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R144	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R145	1-218-873-11	s	RESISTOR,CHIP 12K 1/10W (1608)
R146	1-245-438-91	s	RESISTOR, CHIP 2700(1608)
R147	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R148	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R149	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R151	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R152	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R153	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R154	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R155	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R156	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R157	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R158	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R161	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R163	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R164	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R165	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R167	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R168	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R169	1-218-873-11	s	RESISTOR,CHIP 12K 1/10W (1608)
R170	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R171	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R172	1-218-885-11	s	RESISTOR,CHIP 39K 1/10W (1608)
R173	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/10W(1608)
R175	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/10W(1608)
R176	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R177	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/10W(1608)
R178	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/10W(1608)
R179	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R180	1-218-899-11	s	RESISTOR,CHIP 150K 1/10W(1608)
R182	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R183	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R184	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R185	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R186	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R187	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R190	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/10W(1608)
R192	1-218-877-11	s	RESISTOR,CHIP 18K 1/10W (1608)
R193	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R194	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/10W(1608)
R195	1-218-903-11	s	RESISTOR,CHIP 220K 1/10W(1608)
R196	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R197	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/10W(1608)
R199	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R200	1-218-843-11	s	RESISTOR,CHIP 680 1/10W (1608)
R201	1-218-827-11	s	RESISTOR,CHIP 150 1/10W (1608)
R202	1-218-829-11	s	RESISTOR,CHIP 180 1/10W (1608)
R203	1-218-885-11	s	RESISTOR,CHIP 39K 1/10W (1608)

(CUE-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R204	1-245-299-91	s	RESISTOR, CHIP 10K
R205	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/10W(1608)
R206	1-218-893-11	s	RESISTOR, CHIP 82K 1/10W(1608)
R207	1-245-299-91	s	RESISTOR, CHIP 10K
R208	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R209	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/10W(1608)
R210	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R211	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R212	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R213	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R214	1-245-439-91	s	RESISTOR, CHIP 4700(1608)
R215	1-245-299-91	s	RESISTOR, CHIP 10K
R216	1-245-299-91	s	RESISTOR, CHIP 10K
R217	1-245-299-91	s	RESISTOR, CHIP 10K
R218	1-245-299-91	s	RESISTOR, CHIP 10K
R219	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R220	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R221	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R222	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R223	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R224	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R225	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R226	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R227	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R228	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R229	1-219-493-11	s	RESISTOR, METAL FILM CHIP 22
R230	1-219-493-11	s	RESISTOR, METAL FILM CHIP 22
R231	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R232	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R233	1-219-493-11	s	RESISTOR, METAL FILM CHIP 22
R234	1-219-493-11	s	RESISTOR, METAL FILM CHIP 22
R236	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R237	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R238	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R239	1-218-841-11	s	RESISTOR,CHIP 560 1/10W (1608)
R240	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R241	1-218-841-11	s	RESISTOR,CHIP 560 1/10W (1608)
R242	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R243	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R244	1-218-837-11	s	RESISTOR,CHIP 390 1/10W (1608)
R245	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R246	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R247	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R248	1-218-893-11	s	RESISTOR, CHIP 82K 1/10W(1608)
R249	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R253	1-211-981-11	s	RESISTOR,CHIP 33 1/10W (1608)
R254	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/10W(1608)
R255	1-218-873-11	s	RESISTOR,CHIP 12K 1/10W (1608)
R256	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R257	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R258	1-245-437-91	s	RESISTOR, CHIP 100(1608)
R259	1-245-437-91	s	RESISTOR, CHIP 100(1608)
R260	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R261	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R263	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R264	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R266	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R267	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R300	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(CUE-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R301	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R302	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R303	1-218-839-11	s	RESISTOR,CHIP 470 1/10W (1608)
R304	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R305	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R306	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R307	1-218-835-11	s	RESISTOR,CHIP 330 1/10W (1608)
R308	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
RV100	1-225-792-21	s	RES, ADJ, CERMET 10K
RV101	1-225-788-21	s	RES, ADJ, CERMET 1K
RV102	1-225-788-21	s	RES, ADJ, CERMET 1K
RV103	1-225-792-21	s	RES, ADJ, CERMET 10K
RV104	1-225-789-21	s	RES, ADJ, CERMET 2K
RV105	1-225-792-21	s	RES, ADJ, CERMET 10K
RV106	1-241-262-11	s	RESISTOR ADJ 2K (CERMET)
RV107	1-225-789-21	s	RES, ADJ, CERMET 2K
RV108	1-225-787-21	s	RES, ADJ, CERMET 500
RY100	1-755-379-11	s	RELAY
RY101	1-755-379-11	s	RELAY
S100	1-692-270-41	s	SWITCH, SLIDE
S101	1-692-270-41	s	SWITCH, SLIDE
THP100	1-810-106-11	s	THERMISTOR, POSITIVE LINEAR
THP101	1-810-106-11	s	THERMISTOR, POSITIVE LINEAR
THP300	1-810-106-11	s	THERMISTOR, POSITIVE LINEAR
TP100	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP103	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP104	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP105	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP300	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP301	1-535-877-22	s	CHIP,CHECKER (TEST POINT)

DIO-86 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-739-A	s	MOUNTED CIRCUIT BOARD, DIO-86
C101	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C102	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C103	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C104	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C105	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C106	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C107	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C108	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C109	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C110	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C111	1-162-913-91	s	CAP, CERAMIC 8.0PF CH 1608
C112	1-162-913-91	s	CAP, CERAMIC 8.0PF CH 1608
C113	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C114	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C115	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C116	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C117	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C118	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C119	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C120	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C122	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C123	1-109-864-91	s	CAP, CHIP CERAMIC 68PF CH
C124	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C125	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C126	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C128	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C135	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C136	1-162-921-91	s	CAP, CERAMIC 33PF CH 1608
C137	1-162-928-91	s	CAP, CERAMIC 120PF CH 1608
C138	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
CN1	1-774-792-51	s	CONNECTOR, FPC 4P
CN2	1-794-224-11	o	CONNECTOR, BOARD TO BOARD 50P
CN3	1-794-223-11	o	CONNECTOR, BOARD TO BOARD 40P
CT101	1-141-390-11	s	CAP, TRIMMER 90PF
E101	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB13	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB15	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB17	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB18	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB19	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB20	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB21	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB22	1-469-094-21	s	FERRITE, EMI (SMD) (1608)

(DIO-86 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB23	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB24	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB25	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB26	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB27	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB28	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB29	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB31	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB32	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB33	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
IC102	8-759-654-91	s	IC CXD9137R
IC104	8-759-324-03	s	IC HA17431UA-TL
IC105	6-709-804-01	s	IC CXA8103M-A-TLM-E
L101	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L102	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L103	1-419-630-21	s	COIL, CHOKE 4.7UH
L106	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L107	1-412-935-21	s	INDUCTOR 0.47UH (2520)
L108	1-416-344-21	s	COIL, CHOKE 10UH
L109	1-419-630-21	s	COIL, CHOKE 4.7UH
R104	1-216-857-91	s	RES, CHIP 1.0M (1608)
R109	1-218-847-91	s	RES, CHIP 1.0K (1608)
R110	1-218-847-91	s	RES, CHIP 1.0K (1608)
R111	1-218-839-91	s	RES, CHIP 470 (1608)
R113	1-218-851-91	s	RES, CHIP 1.5K (1608)
R115	1-218-823-91	s	RES, CHIP 100 (1608)
R116	1-211-977-91	s	RES, CHIP 22 (1608)
R120	1-218-863-91	s	RES, CHIP 4.7K (1608)
R121	1-218-871-91	s	RES, CHIP 10K (1608)
R122	1-218-855-91	s	RES, CHIP 2.2K (1608)
R126	1-218-839-91	s	RES, CHIP 470 (1608)
R133	1-218-823-91	s	RES, CHIP 100 (1608)
R134	1-218-823-91	s	RES, CHIP 100 (1608)
R135	1-218-855-91	s	RES, CHIP 2.2K (1608)
R138	1-218-871-91	s	RES, CHIP 10K (1608)
R139	1-218-854-91	s	RES, CHIP 2.0K (1608)
R141	1-220-221-91	s	RES,SQUARE TYPE CHIP 100(4532)
R142	1-218-887-91	s	RES, CHIP 47K (1608)
RB101	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB102	1-233-873-21	s	RES, CHIP NETWORK 220K (3216)
TP103	1-535-877-22	s	CHIP, CHECKER
TP104	1-535-877-22	s	CHIP, CHECKER
TP105	1-535-877-22	s	CHIP, CHECKER
TP106	1-535-877-22	s	CHIP, CHECKER
TP107	1-535-877-22	s	CHIP, CHECKER
TP108	1-535-877-22	s	CHIP, CHECKER
X102	1-813-844-21	s	VIBRATOR, CRYSTAL (13.56MHZ)

DR-508 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8346-853-C	s	MOUNTED CIRCUIT BOARD, DR-508
3pcs	3-624-978-01	o	P HOLDER
3pcs	7-682-953-01	s	SCREW +PSW 3X20
C100	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C101	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C102	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C103	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C104	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C105	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C106	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C107	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C108	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C109	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C110	1-162-916-91	s	CAP, CERAMIC 12PF CH 1608
C111	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C112	1-162-916-91	s	CAP, CERAMIC 12PF CH 1608
C113	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C114	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C115	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C116	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C117	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C118	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C119	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C120	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C121	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C122	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C200	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C201	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C202	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C203	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C204	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C205	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C206	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C207	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C208	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C209	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C210	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C211	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C212	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C213	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C214	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C215	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C216	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C217	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C218	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C219	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C300	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C301	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C302	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C304	1-162-965-91	s	CAP, CERAMIC 1500PF B 1608
C305	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C308	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C310	1-107-420-21	s	CAP, CHIP ELECT 47MF
C312	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C313	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C314	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C315	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C316	1-107-420-21	s	CAP, CHIP ELECT 47MF

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C317	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C318	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C319	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C320	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C321	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C324	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C327	1-107-420-21	s	CAP, CHIP ELECT 47MF
C328	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C330	1-107-420-21	s	CAP, CHIP ELECT 47MF
C331	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C332	1-107-420-21	s	CAP, CHIP ELECT 47MF
C333	1-107-420-21	s	CAP, CHIP ELECT 47MF
C400	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C401	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C402	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C403	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C404	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C405	1-162-965-91	s	CAP, CERAMIC 1500PF B 1608
C406	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C407	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C408	1-107-420-21	s	CAP, CHIP ELECT 47MF
C409	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C410	1-115-670-21	s	CAP, CHIP TYPE ELECT 220MF
C412	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C413	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C414	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C415	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C500	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C502	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C504	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C505	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C506	1-107-420-21	s	CAP, CHIP ELECT 47MF
C507	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C508	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C509	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C510	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C512	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C513	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C514	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C515	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C516	1-107-420-21	s	CAP, CHIP ELECT 47MF
C517	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C518	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C519	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C520	1-128-401-21	s	CAP, ELECT 100MF 8X6
C521	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C522	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C600	1-162-967-91	s	CAP, CERAMIC 3300PF B 1608
C601	1-162-967-91	s	CAP, CERAMIC 3300PF B 1608
C602	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C603	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C605	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C606	1-165-176-91	s	CAP,CERAMIC 47000PF B 1608
C607	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C608	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C609	1-164-390-91	s	CAP, CERAMIC 330PF CH 1608
C610	1-164-390-91	s	CAP, CERAMIC 330PF CH 1608
C611	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C612	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C614	1-164-392-91	s	CAP, CERAMIC 390PF CH 1608
C616	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
C621	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C623	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C624	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C626	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C627	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C629	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C632	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C636	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C637	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C638	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C639	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C641	1-115-414-91	s	CAP,CHIP CERAMIC 820PF CH 1608
C642	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C643	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C644	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C645	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
C646	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C647	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C648	1-164-217-91	s	CAP,CERAMIC 150PF CH 1608
C649	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C650	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C651	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C653	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C654	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C656	1-162-965-91	s	CAP, CERAMIC 1500PF B 1608
C657	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C659	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C660	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C700	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C701	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C702	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C703	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C705	1-128-401-21	s	CAP, ELECT 100MF 8X6
C706	1-128-401-21	s	CAP, ELECT 100MF 8X6
C707	1-128-401-21	s	CAP, ELECT 100MF 8X6
C708	1-107-420-21	s	CAP, CHIP ELECT 47MF
C709	1-162-965-91	s	CAP, CERAMIC 1500PF B 1608
C710	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C711	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C712	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C713	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C714	1-107-420-21	s	CAP, CHIP ELECT 47MF
C715	1-128-401-21	s	CAP, ELECT 100MF 8X6
C716	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C719	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C720	1-107-420-21	s	CAP, CHIP ELECT 47MF
C721	1-107-420-21	s	CAP, CHIP ELECT 47MF
C722	1-127-738-91	s	CAP, CERAMIC 4700000PF B(3225)
C723	1-127-738-91	s	CAP, CERAMIC 4700000PF B(3225)
C724	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C725	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C726	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C729	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C730	1-165-811-91	s	CAP, CHIP CERAMIC 22MF B 4532
C731	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C733	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C736	1-135-347-21	s	CAP, ELECT 82MF (8X7)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C740	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C741	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C742	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C743	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C744	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C745	1-104-607-21	s	CAP, CHIP ELECT 47MF
C746	1-104-607-21	s	CAP, CHIP ELECT 47MF
C747	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C750	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C751	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C752	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C753	1-162-965-91	s	CAP, CERAMIC 1500PF B 1608
C755	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C756	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C757	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C758	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C759	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C760	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C762	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C765	1-107-420-21	s	CAP, CHIP ELECT 47MF
C766	1-107-420-21	s	CAP, CHIP ELECT 47MF
C768	1-107-420-21	s	CAP, CHIP ELECT 47MF
C769	1-107-420-21	s	CAP, CHIP ELECT 47MF
C770	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C771	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C800	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C803	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C804	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C805	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C806	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C807	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C808	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C809	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C810	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C811	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C812	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C813	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C816	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C817	1-107-419-21	s	CAP, CHIP ELECT 22MF
C818	1-107-420-21	s	CAP, CHIP ELECT 47MF
C819	1-107-419-21	s	CAP, CHIP ELECT 22MF
C823	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C824	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1000	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C1001	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1002	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1003	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1004	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1005	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1006	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C1007	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C1008	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C1009	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1010	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1011	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C1012	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C1013	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1016	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C1017	1-107-419-21	s	CAP, CHIP ELECT 22MF

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1018	1-107-420-21	s	CAP, CHIP ELECT 47MF
C1019	1-107-419-21	s	CAP, CHIP ELECT 22MF
C1023	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1024	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C1025	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
C1026	1-107-826-91	s	CAP, CHIP CERAMIC 100000PF B
CN61	1-792-489-11	o	WIRE ASSEMBLY, FLAT TYPE
CN62	1-792-489-11	o	WIRE ASSEMBLY, FLAT TYPE
CN65	1-691-959-11	o	PIN, CONNECTOR (PC BOARD) 4P
CN200	1-778-552-21	o	PIN, CONNECTOR 30P
CN201	1-778-551-21	o	PIN, CONNECTOR 20P
CN202	1-580-539-11	o	PIN, CONNECTOR (PC BOARD) 20P
CN203	1-564-007-11	s	PIN, CONNECTOR 8P
CN204	1-569-363-61	s	CONNECTOR, FPC 15P
CN205	1-569-363-61	s	CONNECTOR, FPC 15P
CN206	1-764-177-21	s	PIN, CONNECTOR (SMD)(1.5MM) 7P
CN207	1-766-382-21	s	PIN, CONNECTOR (1.5MM)(SMD)10P
CN208	1-564-011-11	o	PIN, CONNECTOR 12P
CN210	1-779-268-21	o	PIN, CONNECTOR (1.5MM)(SMD)11P
CN212	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN213	1-564-001-11	o	PIN, CONNECTOR 2P
CN214	1-564-001-11	o	PIN, CONNECTOR 2P
CN215	1-695-320-21	o	PIN, CONNECTOR (1.5MM)(SMD) 2P
CN216	1-564-010-11	s	PIN, CONNECTOR 11P
D200	8-719-024-83	s	DIODE 1SS301-TE85L
D201	8-719-024-83	s	DIODE 1SS301-TE85L
D202	8-719-024-83	s	DIODE 1SS301-TE85L
D203	8-719-024-83	s	DIODE 1SS301-TE85L
D204	8-719-024-81	s	DIODE 1SS300-TE85L
D205	8-719-024-81	s	DIODE 1SS300-TE85L
D206	8-719-024-81	s	DIODE 1SS300-TE85L
D207	8-719-024-81	s	DIODE 1SS300-TE85L
D302	8-719-024-81	s	DIODE 1SS300-TE85L
D303	8-719-024-81	s	DIODE 1SS300-TE85L
D305	8-719-073-92	s	DIODE RB060L-40TE25
D306	8-719-073-92	s	DIODE RB060L-40TE25
D401	8-719-073-92	s	DIODE RB060L-40TE25
D402	8-719-024-81	s	DIODE 1SS300-TE85L
D500	8-719-048-98	s	DIODE RB160L-40TE25
D501	8-719-048-98	s	DIODE RB160L-40TE25
D502	8-719-048-98	s	DIODE RB160L-40TE25
D503	8-719-048-98	s	DIODE RB160L-40TE25
D504	8-719-048-98	s	DIODE RB160L-40TE25
D505	8-719-048-98	s	DIODE RB160L-40TE25
D506	8-719-048-98	s	DIODE RB160L-40TE25
D507	8-719-048-98	s	DIODE RB160L-40TE25
D508	8-719-048-98	s	DIODE RB160L-40TE25
D509	8-719-048-98	s	DIODE RB160L-40TE25
D511	8-719-048-98	s	DIODE RB160L-40TE25
D512	8-719-048-98	s	DIODE RB160L-40TE25
D513	8-719-048-98	s	DIODE RB160L-40TE25
D514	8-719-048-98	s	DIODE RB160L-40TE25
D601	8-719-024-81	s	DIODE 1SS300-TE85L
D602	8-719-024-81	s	DIODE 1SS300-TE85L
D700	8-719-073-92	s	DIODE RB060L-40TE25
D701	8-719-066-98	s	DIODE RB051L-40TE25
D702	8-719-066-98	s	DIODE RB051L-40TE25
D703	8-719-073-92	s	DIODE RB060L-40TE25

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D800	8-719-024-81	s	DIODE 1SS300-TE85L
D1000	8-719-024-81	s	DIODE 1SS300-TE85L
F1	⚠ 1-576-328-21	s	FUSE (SMD) (8A/125V)
F400	⚠ 1-576-269-21	s	FUSE (SMD) (3.15A/125V)
F500	⚠ 1-576-269-21	s	FUSE (SMD) (3.15A/125V)
F700	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F701	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F702	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F703	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F704	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F705	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F706	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F800	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F1000	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
IC1	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC2	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC3	8-759-549-15	s	IC SN74LV245APWR
IC4	8-759-549-01	s	IC SN74LV125APWR
IC100	8-752-903-31	o	IC CXP87860-064Q
IC101	8-759-445-94	s	IC AK6480AM-E2
IC103	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC104	8-759-523-78	s	IC TC74VHC00FT(EL)
IC105	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC106	8-759-445-94	s	IC AK6480AM-E2
IC200	8-759-523-84	s	IC TC74VHC14FT(EL)
IC201	8-759-523-84	s	IC TC74VHC14FT(EL)
IC202	8-759-523-84	s	IC TC74VHC14FT(EL)
IC205	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC207	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC208	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC209	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC210	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC300	8-759-194-99	s	IC UPC1246G-E2
IC301	8-759-337-40	s	IC NJM2904V(TE2)
IC302	8-759-338-95	s	IC NJM2903V(TE2)
IC303	8-759-338-95	s	IC NJM2903V(TE2)
IC304	8-759-338-95	s	IC NJM2903V(TE2)
IC305	8-759-422-21	s	IC NJM4580V(TE2)
IC401	8-759-278-58	s	IC NJM4558V-TE2
IC410	8-759-422-21	s	IC NJM4580V(TE2)
IC411	8-759-278-58	s	IC NJM4558V-TE2
IC500	8-759-234-04	s	IC TA7267BP
IC501	8-759-234-04	s	IC TA7267BP
IC502	8-759-234-04	s	IC TA7267BP
IC503	8-759-337-40	s	IC NJM2904V(TE2)
IC504	8-759-337-40	s	IC NJM2904V(TE2)
IC604	6-702-295-01	s	IC NJM78M12DL1A-TE1
IC605	8-759-530-05	s	IC TC4053BFT(EL,N)
IC606	8-759-278-58	s	IC NJM4558V-TE2
IC607	8-759-276-87	s	IC NJM4565M-A(TE2)
IC608	8-759-155-26	s	IC UPC4570G2-E2
IC609	8-759-530-05	s	IC TC4053BFT(EL,N)
IC610	8-759-523-78	s	IC TC74VHC00FT(EL)
IC611	8-759-530-05	s	IC TC4053BFT(EL,N)
IC612	8-759-338-95	s	IC NJM2903V(TE2)
IC613	6-702-495-01	s	IC LA7205M-TLM-E
IC614	6-702-495-01	s	IC LA7205M-TLM-E
IC615	8-759-530-05	s	IC TC4053BFT(EL,N)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC700	8-759-183-53	s	IC TL431CPK-E2
IC701	8-759-372-32	s	IC TL1451ACNSR
IC703	8-759-182-84	s	IC PQ05SZ5UJ00H
IC705	8-759-337-40	s	IC NJM2904V(TE2)
IC706	8-759-338-95	s	IC NJM2903V(TE2)
IC707	8-759-338-95	s	IC NJM2903V(TE2)
IC708	8-759-337-40	s	IC NJM2904V(TE2)
IC709	8-759-337-40	s	IC NJM2904V(TE2)
IC800	8-759-278-58	s	IC NJM4558V-TE2
IC801	8-759-264-50	s	IC MB3759PF-ER
IC802	8-759-422-21	s	IC NJM4580V(TE2)
IC804	8-759-523-87	s	IC TC4049BF(EL,N)
IC805	8-759-278-58	s	IC NJM4558V-TE2
IC1000	8-759-278-58	s	IC NJM4558V-TE2
IC1001	8-759-264-50	s	IC MB3759PF-ER
IC1002	8-759-422-21	s	IC NJM4580V(TE2)
IC1004	8-759-523-87	s	IC TC4049BF(EL,N)
L300	1-406-749-11	s	COIL, CHOKE 100
L400	1-400-303-21	s	COIL, CHOKE 68UH
L500	1-400-303-21	s	COIL, CHOKE 68UH
L600	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L601	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L700	1-406-749-11	s	COIL, CHOKE 100
L702	1-416-344-21	s	COIL, CHOKE 10UH
L703	1-416-344-21	s	COIL, CHOKE 10UH
L704	1-416-344-21	s	COIL, CHOKE 10UH
L705	1-416-344-21	s	COIL, CHOKE 10UH
L706	1-400-175-21	s	COIL, CHOKE 47UH
L707	1-400-175-21	s	COIL, CHOKE 47UH
L708	1-416-344-21	s	COIL, CHOKE 10UH
L709	1-416-344-21	s	COIL, CHOKE 10UH
L710	1-416-344-21	s	COIL, CHOKE 10UH
L711	1-406-749-11	s	COIL, CHOKE 100
L712	1-416-344-21	s	COIL, CHOKE 10UH
L800	1-400-175-21	s	COIL, CHOKE 47UH
L801	1-400-175-21	s	COIL, CHOKE 47UH
L1000	1-400-175-21	s	COIL, CHOKE 47UH
L1001	1-400-175-21	s	COIL, CHOKE 47UH
PH201	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
PH202	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
PH203	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
PH204	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
Q100	8-729-039-57	s	TRANSISTOR DTC363EKT146
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q201	8-729-117-36	s	TRANSISTOR 2SC4177-T1L5
Q202	8-729-117-36	s	TRANSISTOR 2SC4177-T1L5
Q203	8-729-117-36	s	TRANSISTOR 2SC4177-T1L5
Q204	8-729-117-36	s	TRANSISTOR 2SC4177-T1L5
Q205	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q206	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q207	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q208	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q300	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q301	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q302	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q303	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q304	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q305	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q306	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q307	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q308	8-729-046-11	s	TRANSISTOR SI4420DY-T1
Q309	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q310	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q311	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q312	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q313	8-729-046-11	s	TRANSISTOR SI4420DY-T1
Q314	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q315	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q316	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q317	8-729-047-32	s	TRANSISTOR SI4425DY-T1
Q318	8-729-046-11	s	TRANSISTOR SI4420DY-T1
Q319	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q323	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q400	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q401	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q426	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q500	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q501	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q502	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q503	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q504	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q505	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q506	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q603	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q604	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q605	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q606	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q607	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q608	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q609	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q700	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q701	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q702	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q703	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q704	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q705	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q706	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q707	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q708	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q709	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q710	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q711	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q712	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q713	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q714	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q715	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q716	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q717	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q718	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q719	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q720	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q721	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q722	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q723	8-729-808-12	s	TRANSISTOR 2SD1622T-TD-E
Q724	8-729-920-79	s	TRANSISTOR 2SB1132-T100-QR
Q725	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q726	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q727	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q800	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q801	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q802	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q803	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q804	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q805	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q806	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q807	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q808	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q809	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q810	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q811	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q812	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q813	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q1000	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1001	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1002	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q1003	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q1004	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q1005	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q1006	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q1007	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q1008	8-729-040-75	s	TRANSISTOR SI4953DY-T1
Q1009	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q1010	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q1011	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q1012	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q1013	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
R100	1-218-887-91	s	RES, CHIP 47K (1608)
R101	1-218-887-91	s	RES, CHIP 47K (1608)
R102	1-218-887-91	s	RES, CHIP 47K (1608)
R103	1-218-863-91	s	RES, CHIP 4.7K (1608)
R104	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R105	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R106	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R107	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R108	1-218-847-91	s	RES, CHIP 1.0K (1608)
R109	1-218-895-91	s	RES, CHIP 100K (1608)
R110	1-218-895-91	s	RES, CHIP 100K (1608)
R111	1-218-855-91	s	RES, CHIP 2.2K (1608)
R112	1-218-895-91	s	RES, CHIP 100K (1608)
R113	1-218-863-91	s	RES, CHIP 4.7K (1608)
R114	1-218-895-91	s	RES, CHIP 100K (1608)
R115	1-218-895-91	s	RES, CHIP 100K (1608)
R116	1-218-847-91	s	RES, CHIP 1.0K (1608)
R117	1-218-871-91	s	RES, CHIP 10K (1608)
R118	1-218-871-91	s	RES, CHIP 10K (1608)
R119	1-218-875-91	s	RES, CHIP 15K (1608)
R120	1-218-863-91	s	RES, CHIP 4.7K (1608)
R121	1-218-863-91	s	RES, CHIP 4.7K (1608)
R122	1-218-863-91	s	RES, CHIP 4.7K (1608)
R123	1-218-863-91	s	RES, CHIP 4.7K (1608)
R124	1-218-863-91	s	RES, CHIP 4.7K (1608)
R125	1-218-847-91	s	RES, CHIP 1.0K (1608)
R126	1-218-847-91	s	RES, CHIP 1.0K (1608)
R127	1-218-863-91	s	RES, CHIP 4.7K (1608)
R204	1-218-847-91	s	RES, CHIP 1.0K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R205	1-218-847-91	s	RES, CHIP 1.0K (1608)
R206	1-218-859-91	s	RES, CHIP 3.3K (1608)
R207	1-218-859-91	s	RES, CHIP 3.3K (1608)
R208	1-218-895-91	s	RES, CHIP 100K (1608)
R209	1-218-823-91	s	RES, CHIP 100 (1608)
R215	1-218-859-91	s	RES, CHIP 3.3K (1608)
R216	1-218-859-91	s	RES, CHIP 3.3K (1608)
R217	1-218-895-91	s	RES, CHIP 100K (1608)
R218	1-218-823-91	s	RES, CHIP 100 (1608)
R219	1-218-859-91	s	RES, CHIP 3.3K (1608)
R220	1-218-859-91	s	RES, CHIP 3.3K (1608)
R221	1-218-895-91	s	RES, CHIP 100K (1608)
R222	1-218-823-91	s	RES, CHIP 100 (1608)
R223	1-218-859-91	s	RES, CHIP 3.3K (1608)
R224	1-218-871-91	s	RES, CHIP 10K (1608)
R225	1-218-887-91	s	RES, CHIP 47K (1608)
R226	1-218-859-91	s	RES, CHIP 3.3K (1608)
R227	1-218-887-91	s	RES, CHIP 47K (1608)
R228	1-218-895-91	s	RES, CHIP 100K (1608)
R229	1-218-823-91	s	RES, CHIP 100 (1608)
R230	1-218-859-91	s	RES, CHIP 3.3K (1608)
R231	1-218-829-91	s	RES, CHIP 180 (1608)
R232	1-218-863-91	s	RES, CHIP 4.7K (1608)
R233	1-218-895-91	s	RES, CHIP 100K (1608)
R234	1-218-871-91	s	RES, CHIP 10K (1608)
R235	1-218-871-91	s	RES, CHIP 10K (1608)
R236	1-218-882-91	s	RES, CHIP 30K (1608)
R237	1-218-861-91	s	RES, CHIP 3.9K (1608)
R238	1-218-844-91	s	RES, CHIP 750 (1608)
R300	1-218-847-91	s	RES, CHIP 1.0K (1608)
R301	1-218-871-91	s	RES, CHIP 10K (1608)
R302	1-218-847-91	s	RES, CHIP 1.0K (1608)
R305	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R306	1-218-879-91	s	RES, CHIP 22K (1608)
R307	1-218-863-91	s	RES, CHIP 4.7K (1608)
R308	1-218-889-91	s	RES, CHIP 56K (1608)
R309	1-218-875-91	s	RES, CHIP 15K (1608)
R310	1-218-879-91	s	RES, CHIP 22K (1608)
R311	1-218-877-91	s	RES, CHIP 18K (1608)
R312	1-218-855-91	s	RES, CHIP 2.2K (1608)
R313	1-218-889-91	s	RES, CHIP 56K (1608)
R314	1-218-891-91	s	RES, CHIP 68K (1608)
R315	1-218-863-91	s	RES, CHIP 4.7K (1608)
R316	1-218-871-91	s	RES, CHIP 10K (1608)
R317	1-218-855-91	s	RES, CHIP 2.2K (1608)
R318	1-218-879-91	s	RES, CHIP 22K (1608)
R319	1-218-871-91	s	RES, CHIP 10K (1608)
R320	1-218-879-91	s	RES, CHIP 22K (1608)
R321	1-218-883-91	s	RES, CHIP 33K (1608)
R322	1-218-839-91	s	RES, CHIP 470 (1608)
R323	1-218-889-91	s	RES, CHIP 56K (1608)
R324	1-218-871-91	s	RES, CHIP 10K (1608)
R325	1-218-889-91	s	RES, CHIP 56K (1608)
R328	1-218-879-91	s	RES, CHIP 22K (1608)
R329	1-218-889-91	s	RES, CHIP 56K (1608)
R330	1-218-871-91	s	RES, CHIP 10K (1608)
R331	1-218-871-91	s	RES, CHIP 10K (1608)
R332	1-218-887-91	s	RES, CHIP 47K (1608)
R334	1-218-855-91	s	RES, CHIP 2.2K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R335	1-218-855-91	s	RES, CHIP 2.2K (1608)
R336	1-218-855-91	s	RES, CHIP 2.2K (1608)
R337	1-218-879-91	s	RES, CHIP 22K (1608)
R338	1-218-865-91	s	RES, CHIP 5.6K (1608)
R339	1-218-887-91	s	RES, CHIP 47K (1608)
R340	1-218-865-91	s	RES, CHIP 5.6K (1608)
R341	1-218-855-91	s	RES, CHIP 2.2K (1608)
R342	1-218-855-91	s	RES, CHIP 2.2K (1608)
R343	1-218-855-91	s	RES, CHIP 2.2K (1608)
R344	1-218-847-91	s	RES, CHIP 1.0K (1608)
R345	1-218-847-91	s	RES, CHIP 1.0K (1608)
R346	1-218-875-91	s	RES, CHIP 15K (1608)
R347	1-218-875-91	s	RES, CHIP 15K (1608)
R348	1-218-877-91	s	RES, CHIP 18K (1608)
R349	1-218-877-91	s	RES, CHIP 18K (1608)
R350	1-218-883-91	s	RES, CHIP 33K (1608)
R351	1-218-895-91	s	RES, CHIP 100K (1608)
R352	1-216-855-91	s	RES, CHIP 680K (1608)
R353	1-218-907-91	s	RES, CHIP 330K (1608)
R354	1-218-879-91	s	RES, CHIP 22K (1608)
R355	1-218-855-91	s	RES, CHIP 2.2K (1608)
R356	1-218-863-91	s	RES, CHIP 4.7K (1608)
R357	1-218-887-91	s	RES, CHIP 47K (1608)
R358	1-218-855-91	s	RES, CHIP 2.2K (1608)
R359	1-218-855-91	s	RES, CHIP 2.2K (1608)
R360	1-218-855-91	s	RES, CHIP 2.2K (1608)
R362	1-218-871-91	s	RES, CHIP 10K (1608)
R365	1-218-907-91	s	RES, CHIP 330K (1608)
R366	1-218-895-91	s	RES, CHIP 100K (1608)
R368	1-218-881-91	s	RES, CHIP 27K (1608)
R369	1-219-611-21	s	RES, CHIP (SQUARE TYPE) 0.047
R400	1-218-871-91	s	RES, CHIP 10K (1608)
R401	1-218-879-91	s	RES, CHIP 22K (1608)
R402	1-218-899-91	s	RES, CHIP 150K (1608)
R403	1-218-871-91	s	RES, CHIP 10K (1608)
R405	1-218-871-91	s	RES, CHIP 10K (1608)
R407	1-218-879-91	s	RES, CHIP 22K (1608)
R408	1-218-875-91	s	RES, CHIP 15K (1608)
R409	1-218-879-91	s	RES, CHIP 22K (1608)
R410	1-218-857-91	s	RES, CHIP 2.7K (1608)
R411	1-218-863-91	s	RES, CHIP 4.7K (1608)
R412	1-218-839-91	s	RES, CHIP 470 (1608)
R413	1-218-879-91	s	RES, CHIP 22K (1608)
R415	1-218-879-91	s	RES, CHIP 22K (1608)
R416	1-218-875-91	s	RES, CHIP 15K (1608)
R417	1-218-875-91	s	RES, CHIP 15K (1608)
R418	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R422	1-218-907-91	s	RES, CHIP 330K (1608)
R423	1-218-863-91	s	RES, CHIP 4.7K (1608)
R424	1-218-879-91	s	RES, CHIP 22K (1608)
R425	1-218-907-91	s	RES, CHIP 330K (1608)
R426	1-218-881-91	s	RES, CHIP 27K (1608)
R427	1-218-879-91	s	RES, CHIP 22K (1608)
R428	1-218-881-91	s	RES, CHIP 27K (1608)
R429	1-218-847-91	s	RES, CHIP 1.0K (1608)
R500	1-218-871-91	s	RES, CHIP 10K (1608)
R501	1-218-871-91	s	RES, CHIP 10K (1608)
R502	1-218-855-91	s	RES, CHIP 2.2K (1608)
R503	1-218-855-91	s	RES, CHIP 2.2K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R504	1-218-871-91	s	RES, CHIP 10K (1608)
R505	1-218-871-91	s	RES, CHIP 10K (1608)
R506	1-218-871-91	s	RES, CHIP 10K (1608)
R507	1-218-871-91	s	RES, CHIP 10K (1608)
R508	1-218-871-91	s	RES, CHIP 10K (1608)
R509	1-218-871-91	s	RES, CHIP 10K (1608)
R510	1-218-871-91	s	RES, CHIP 10K (1608)
R511	1-218-871-91	s	RES, CHIP 10K (1608)
R512	1-218-879-91	s	RES, CHIP 22K (1608)
R513	1-218-871-91	s	RES, CHIP 10K (1608)
R514	1-218-879-91	s	RES, CHIP 22K (1608)
R515	1-218-903-91	s	RES, CHIP 220K (1608)
R516	1-218-903-91	s	RES, CHIP 220K (1608)
R517	1-218-871-91	s	RES, CHIP 10K (1608)
R518	1-218-879-91	s	RES, CHIP 22K (1608)
R519	1-218-903-91	s	RES, CHIP 220K (1608)
R520	1-218-903-91	s	RES, CHIP 220K (1608)
R521	1-218-879-91	s	RES, CHIP 22K (1608)
R522	1-218-871-91	s	RES, CHIP 10K (1608)
R523	1-218-871-91	s	RES, CHIP 10K (1608)
R524	1-218-871-91	s	RES, CHIP 10K (1608)
R525	1-218-871-91	s	RES, CHIP 10K (1608)
R526	1-218-857-91	s	RES, CHIP 2.7K (1608)
R527	1-218-871-91	s	RES, CHIP 10K (1608)
R528	1-218-871-91	s	RES, CHIP 10K (1608)
R529	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R530	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R531	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R532	1-218-871-91	s	RES, CHIP 10K (1608)
R534	1-218-831-91	s	RES, CHIP 220 (1608)
R535	1-218-903-91	s	RES, CHIP 220K (1608)
R536	1-218-891-91	s	RES, CHIP 68K (1608)
R541	1-218-903-91	s	RES, CHIP 220K (1608)
R542	1-218-891-91	s	RES, CHIP 68K (1608)
R547	1-218-887-91	s	RES, CHIP 47K (1608)
R548	1-218-887-91	s	RES, CHIP 47K (1608)
R549	1-218-887-91	s	RES, CHIP 47K (1608)
R550	1-218-887-91	s	RES, CHIP 47K (1608)
R551	1-218-887-91	s	RES, CHIP 47K (1608)
R552	1-218-887-91	s	RES, CHIP 47K (1608)
R553	1-218-887-91	s	RES, CHIP 47K (1608)
R554	1-218-887-91	s	RES, CHIP 47K (1608)
R571	1-218-863-91	s	RES, CHIP 4.7K (1608)
R600	1-218-895-91	s	RES, CHIP 100K (1608)
R601	1-218-895-91	s	RES, CHIP 100K (1608)
R602	1-218-855-91	s	RES, CHIP 2.2K (1608)
R603	1-218-887-91	s	RES, CHIP 47K (1608)
R604	1-218-887-91	s	RES, CHIP 47K (1608)
R605	1-218-887-91	s	RES, CHIP 47K (1608)
R606	1-218-887-91	s	RES, CHIP 47K (1608)
R607	1-218-863-91	s	RES, CHIP 4.7K (1608)
R608	1-218-883-91	s	RES, CHIP 33K (1608)
R609	1-218-883-91	s	RES, CHIP 33K (1608)
R610	1-218-863-91	s	RES, CHIP 4.7K (1608)
R611	1-218-863-91	s	RES, CHIP 4.7K (1608)
R613	1-218-842-91	s	RES, CHIP 620 (1608)
R616	1-218-891-91	s	RES, CHIP 68K (1608)
R617	1-218-891-91	s	RES, CHIP 68K (1608)
R620	1-218-895-91	s	RES, CHIP 100K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R621	1-218-919-91	s	RES, CHIP 1M (1608)
R622	1-218-861-91	s	RES, CHIP 3.9K (1608)
R627	1-218-895-91	s	RES, CHIP 100K (1608)
R632	1-218-859-91	s	RES, CHIP 3.3K (1608)
R635	1-218-869-91	s	RES, CHIP 8.2K (1608)
R636	1-218-899-91	s	RES, CHIP 150K (1608)
R637	1-218-883-91	s	RES, CHIP 33K (1608)
R638	1-218-883-91	s	RES, CHIP 33K (1608)
R640	1-218-859-91	s	RES, CHIP 3.3K (1608)
R641	1-218-903-91	s	RES, CHIP 220K (1608)
R642	1-218-903-91	s	RES, CHIP 220K (1608)
R644	1-218-847-91	s	RES, CHIP 1.0K (1608)
R645	1-218-861-91	s	RES, CHIP 3.9K (1608)
R646	1-218-851-91	s	RES, CHIP 1.5K (1608)
R647	1-218-863-91	s	RES, CHIP 4.7K (1608)
R648	1-218-871-91	s	RES, CHIP 10K (1608)
R649	1-218-855-91	s	RES, CHIP 2.2K (1608)
R650	1-218-871-91	s	RES, CHIP 10K (1608)
R651	1-218-871-91	s	RES, CHIP 10K (1608)
R652	1-218-859-91	s	RES, CHIP 3.3K (1608)
R653	1-218-891-91	s	RES, CHIP 68K (1608)
R654	1-220-800-91	s	RES, CHIP 1.5M (1608)
R655	1-218-895-91	s	RES, CHIP 100K (1608)
R656	1-218-869-91	s	RES, CHIP 8.2K (1608)
R657	1-218-919-91	s	RES, CHIP 1M (1608)
R658	1-218-869-91	s	RES, CHIP 8.2K (1608)
R659	1-218-895-91	s	RES, CHIP 100K (1608)
R660	1-218-893-91	s	RES, CHIP 82K (1608)
R661	1-218-863-91	s	RES, CHIP 4.7K (1608)
R663	1-218-871-91	s	RES, CHIP 10K (1608)
R664	1-218-871-91	s	RES, CHIP 10K (1608)
R666	1-218-885-91	s	RES, CHIP 39K (1608)
R667	1-218-887-91	s	RES, CHIP 47K (1608)
R668	1-218-871-91	s	RES, CHIP 10K (1608)
R669	1-218-871-91	s	RES, CHIP 10K (1608)
R670	1-218-871-91	s	RES, CHIP 10K (1608)
R671	1-218-871-91	s	RES, CHIP 10K (1608)
R672	1-219-570-91	s	RES, CHIP 10M (1608)
R673	1-219-570-91	s	RES, CHIP 10M (1608)
R674	1-218-887-91	s	RES, CHIP 47K (1608)
R676	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R700	1-218-853-91	s	RES, CHIP 1.8K (1608)
R701	1-218-899-91	s	RES, CHIP 150K (1608)
R702	1-218-899-91	s	RES, CHIP 150K (1608)
R703	1-218-899-91	s	RES, CHIP 150K (1608)
R704	1-218-887-91	s	RES, CHIP 47K (1608)
R705	1-218-863-91	s	RES, CHIP 4.7K (1608)
R706	1-218-871-91	s	RES, CHIP 10K (1608)
R707	1-218-863-91	s	RES, CHIP 4.7K (1608)
R708	1-218-885-91	s	RES, CHIP 39K (1608)
R709	1-218-889-91	s	RES, CHIP 56K (1608)
R710	1-218-879-91	s	RES, CHIP 22K (1608)
R711	1-218-879-91	s	RES, CHIP 22K (1608)
R712	1-218-875-91	s	RES, CHIP 15K (1608)
R713	1-218-883-91	s	RES, CHIP 33K (1608)
R714	1-218-871-91	s	RES, CHIP 10K (1608)
R715	1-218-871-91	s	RES, CHIP 10K (1608)
R716	1-218-879-91	s	RES, CHIP 22K (1608)
R717	1-218-857-91	s	RES, CHIP 2.7K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R718	1-218-871-91	s	RES, CHIP 10K (1608)
R719	1-218-871-91	s	RES, CHIP 10K (1608)
R720	1-218-871-91	s	RES, CHIP 10K (1608)
R721	1-218-879-91	s	RES, CHIP 22K (1608)
R722	1-218-839-91	s	RES, CHIP 470 (1608)
R723	1-218-839-91	s	RES, CHIP 470 (1608)
R724	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R725	1-218-903-91	s	RES, CHIP 220K (1608)
R726	1-218-891-91	s	RES, CHIP 68K (1608)
R727	1-218-879-91	s	RES, CHIP 22K (1608)
R728	1-218-887-91	s	RES, CHIP 47K (1608)
R729	1-218-883-91	s	RES, CHIP 33K (1608)
R730	1-218-887-91	s	RES, CHIP 47K (1608)
R731	1-218-863-91	s	RES, CHIP 4.7K (1608)
R732	1-218-863-91	s	RES, CHIP 4.7K (1608)
R733	1-218-863-91	s	RES, CHIP 4.7K (1608)
R734	1-218-863-91	s	RES, CHIP 4.7K (1608)
R735	1-218-859-91	s	RES, CHIP 3.3K (1608)
R736	1-218-859-91	s	RES, CHIP 3.3K (1608)
R737	1-218-871-91	s	RES, CHIP 10K (1608)
R738	1-218-868-91	s	RES, CHIP 7.5K (1608)
R739	1-218-903-91	s	RES, CHIP 220K (1608)
R740	1-218-903-91	s	RES, CHIP 220K (1608)
R742	1-218-885-91	s	RES, CHIP 39K (1608)
R744	1-218-873-91	s	RES, CHIP 12K (1608)
R745	1-218-883-91	s	RES, CHIP 33K (1608)
R746	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R747	1-218-871-91	s	RES, CHIP 10K (1608)
R748	1-218-855-91	s	RES, CHIP 2.2K (1608)
R751	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R752	1-218-855-91	s	RES, CHIP 2.2K (1608)
R753	1-218-855-91	s	RES, CHIP 2.2K (1608)
R754	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R756	1-218-871-91	s	RES, CHIP 10K (1608)
R757	1-218-871-91	s	RES, CHIP 10K (1608)
R759	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R760	1-218-823-91	s	RES, CHIP 100 (1608)
R763	1-218-871-91	s	RES, CHIP 10K (1608)
R766	1-218-883-91	s	RES, CHIP 33K (1608)
R768	1-218-847-91	s	RES, CHIP 1.0K (1608)
R769	1-218-847-91	s	RES, CHIP 1.0K (1608)
R770	1-218-847-91	s	RES, CHIP 1.0K (1608)
R771	1-218-831-91	s	RES, CHIP 220 (1608)
R772	1-218-831-91	s	RES, CHIP 220 (1608)
R773	1-218-823-91	s	RES, CHIP 100 (1608)
R774	1-218-823-91	s	RES, CHIP 100 (1608)
R775	1-218-232-91	s	RES,SQUARE TYPE CHIP 4.7(4532)
R776	1-218-232-91	s	RES,SQUARE TYPE CHIP 4.7(4532)
R777	1-218-614-91	s	RES, METAL FILM (CHIP) 10
R778	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R779	1-218-907-91	s	RES, CHIP 330K (1608)
R780	1-218-863-91	s	RES, CHIP 4.7K (1608)
R782	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R800	1-218-871-91	s	RES, CHIP 10K (1608)
R801	1-218-879-91	s	RES, CHIP 22K (1608)
R803	1-218-887-91	s	RES, CHIP 47K (1608)
R804	1-218-887-91	s	RES, CHIP 47K (1608)
R806	1-218-887-91	s	RES, CHIP 47K (1608)
R808	1-218-887-91	s	RES, CHIP 47K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R809	1-218-887-91	s	RES, CHIP 47K (1608)
R810	1-218-863-91	s	RES, CHIP 4.7K (1608)
R811	1-218-863-91	s	RES, CHIP 4.7K (1608)
R812	1-218-887-91	s	RES, CHIP 47K (1608)
R813	1-218-857-91	s	RES, CHIP 2.7K (1608)
R814	1-218-903-91	s	RES, CHIP 220K (1608)
R815	1-218-862-91	s	RES, CHIP 4.3K (1608)
R816	1-218-843-91	s	RES, CHIP 680 (1608)
R817	1-218-863-91	s	RES, CHIP 4.7K (1608)
R818	1-218-887-91	s	RES, CHIP 47K (1608)
R819	1-218-863-91	s	RES, CHIP 4.7K (1608)
R820	1-218-863-91	s	RES, CHIP 4.7K (1608)
R821	1-218-863-91	s	RES, CHIP 4.7K (1608)
R822	1-218-863-91	s	RES, CHIP 4.7K (1608)
R823	1-211-969-91	s	RES, CHIP 10 (1608)
R824	1-218-871-91	s	RES, CHIP 10K (1608)
R825	1-218-855-91	s	RES, CHIP 2.2K (1608)
R826	1-218-855-91	s	RES, CHIP 2.2K (1608)
R829	1-218-899-91	s	RES, CHIP 150K (1608)
R830	1-218-881-91	s	RES, CHIP 27K (1608)
R831	1-218-895-91	s	RES, CHIP 100K (1608)
R832	1-218-863-91	s	RES, CHIP 4.7K (1608)
R833	1-218-863-91	s	RES, CHIP 4.7K (1608)
R834	1-218-855-91	s	RES, CHIP 2.2K (1608)
R835	1-218-855-91	s	RES, CHIP 2.2K (1608)
R836	1-218-895-91	s	RES, CHIP 100K (1608)
R837	1-218-881-91	s	RES, CHIP 27K (1608)
R838	1-218-881-91	s	RES, CHIP 27K (1608)
R839	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R845	1-218-863-91	s	RES, CHIP 4.7K (1608)
R848	1-218-863-91	s	RES, CHIP 4.7K (1608)
R849	1-218-831-91	s	RES, CHIP 220 (1608)
R850	1-218-863-91	s	RES, CHIP 4.7K (1608)
R851	1-218-863-91	s	RES, CHIP 4.7K (1608)
R888	1-218-889-91	s	RES, CHIP 56K (1608)
R889	1-218-841-91	s	RES, CHIP 560 (1608)
R890	1-218-841-91	s	RES, CHIP 560 (1608)
R891	1-218-841-91	s	RES, CHIP 560 (1608)
R892	1-218-841-91	s	RES, CHIP 560 (1608)
R893	1-218-863-91	s	RES, CHIP 4.7K (1608)
R894	1-218-863-91	s	RES, CHIP 4.7K (1608)
R900	1-218-881-91	s	RES, CHIP 27K (1608)
R901	1-218-851-91	s	RES, CHIP 1.5K (1608)
R902	1-218-889-91	s	RES, CHIP 56K (1608)
R903	1-218-879-91	s	RES, CHIP 22K (1608)
R904	1-218-879-91	s	RES, CHIP 22K (1608)
R905	1-218-875-91	s	RES, CHIP 15K (1608)
R906	1-218-907-91	s	RES, CHIP 330K (1608)
R907	1-218-863-91	s	RES, CHIP 4.7K (1608)
R908	1-218-857-91	s	RES, CHIP 2.7K (1608)
R909	1-218-871-91	s	RES, CHIP 10K (1608)
R911	1-218-839-91	s	RES, CHIP 470 (1608)
R912	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R913	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R916	1-218-899-91	s	RES, CHIP 150K (1608)
R917	1-218-899-91	s	RES, CHIP 150K (1608)
R918	1-218-899-91	s	RES, CHIP 150K (1608)
R919	1-218-863-91	s	RES, CHIP 4.7K (1608)
R920	1-218-885-91	s	RES, CHIP 39K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R921	1-218-883-91	s	RES, CHIP 33K (1608)
R922	1-218-871-91	s	RES, CHIP 10K (1608)
R923	1-218-871-91	s	RES, CHIP 10K (1608)
R924	1-218-883-91	s	RES, CHIP 33K (1608)
R925	1-218-879-91	s	RES, CHIP 22K (1608)
R926	1-218-871-91	s	RES, CHIP 10K (1608)
R927	1-218-871-91	s	RES, CHIP 10K (1608)
R928	1-218-879-91	s	RES, CHIP 22K (1608)
R938	1-218-871-91	s	RES, CHIP 10K (1608)
R939	1-218-871-91	s	RES, CHIP 10K (1608)
R1000	1-218-871-91	s	RES, CHIP 10K (1608)
R1001	1-218-879-91	s	RES, CHIP 22K (1608)
R1003	1-218-887-91	s	RES, CHIP 47K (1608)
R1004	1-218-887-91	s	RES, CHIP 47K (1608)
R1006	1-218-887-91	s	RES, CHIP 47K (1608)
R1008	1-218-887-91	s	RES, CHIP 47K (1608)
R1009	1-218-887-91	s	RES, CHIP 47K (1608)
R1010	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1011	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1012	1-218-887-91	s	RES, CHIP 47K (1608)
R1013	1-218-857-91	s	RES, CHIP 2.7K (1608)
R1014	1-218-903-91	s	RES, CHIP 220K (1608)
R1015	1-218-862-91	s	RES, CHIP 4.3K (1608)
R1016	1-218-843-91	s	RES, CHIP 680 (1608)
R1017	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1018	1-218-887-91	s	RES, CHIP 47K (1608)
R1019	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1020	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1021	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1022	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1023	1-211-969-91	s	RES, CHIP 10 (1608)
R1024	1-218-871-91	s	RES, CHIP 10K (1608)
R1025	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1026	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1027	1-218-899-91	s	RES, CHIP 150K (1608)
R1030	1-218-881-91	s	RES, CHIP 27K (1608)
R1031	1-218-895-91	s	RES, CHIP 100K (1608)
R1032	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1033	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1034	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1035	1-218-855-91	s	RES, CHIP 2.2K (1608)
R1036	1-218-895-91	s	RES, CHIP 100K (1608)
R1037	1-218-881-91	s	RES, CHIP 27K (1608)
R1038	1-218-881-91	s	RES, CHIP 27K (1608)
R1039	1-219-706-21	s	RES, CHIP (SQUARE TYPE) 0.10
R1040	1-218-903-91	s	RES, CHIP 220K (1608)
R1041	1-218-891-91	s	RES, CHIP 68K (1608)
R1042	1-218-903-91	s	RES, CHIP 220K (1608)
R1043	1-218-891-91	s	RES, CHIP 68K (1608)
R1045	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1048	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1049	1-218-831-91	s	RES, CHIP 220 (1608)
R1050	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1051	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1089	1-218-841-91	s	RES, CHIP 560 (1608)
R1090	1-218-841-91	s	RES, CHIP 560 (1608)
R1091	1-218-841-91	s	RES, CHIP 560 (1608)
R1092	1-218-841-91	s	RES, CHIP 560 (1608)
R1093	1-218-863-91	s	RES, CHIP 4.7K (1608)

(DR-508 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1094	1-218-863-91	s	RES, CHIP 4.7K (1608)
R1095	1-218-888-91	s	RES, CHIP 51K (1608)
R1096	1-218-888-91	s	RES, CHIP 51K (1608)
RB101	1-233-414-21	s	RES, CHIP NETWORK 4.7K (3216)
RB102	1-233-415-21	s	RES, CHIP NETWORK 10K (3216)
RB200	1-233-578-21	s	RES, CHIP NETWORK 47K (3216)
RB201	1-233-578-21	s	RES, CHIP NETWORK 47K (3216)
RB202	1-233-578-21	s	RES, CHIP NETWORK 47K (3216)
RB203	1-233-578-21	s	RES, CHIP NETWORK 47K (3216)
RB204	1-233-414-21	s	RES, CHIP NETWORK 4.7K (3216)
RB205	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB206	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB207	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB208	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB209	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB210	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB211	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
RB212	1-233-412-21	s	RES, CHIP NETWORK 1.0K (3216)
X100	1-795-816-22	s	OSCILLATOR, CRYSTAL (SMD)

DT-47 BOARD

DT-47 board is changed to DT-48 board. When DT-47 board is not available, use DT-48 board.

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8324-870-C	s	MOUNTED CIRCUIT BOARD, DT-47
1pc	1-803-490-12	s	SENSOR, DEW CONDENSATION
1pc	4-641-552-01	o	SADDLE, LOCK EDGE
1pc	7-621-772-10	s	SCREW +B 2X4
1pc	7-682-948-01	s	SCREW +PSW 3X8
C1	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C2	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C3	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C4	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C5	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C6	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C7	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C8	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C9	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C10	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C11	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C12	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C13	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C14	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C15	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C16	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C17	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C20	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C21	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C22	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C23	1-107-778-21	s	CAP, ELECT 470MF 10X10
C24	1-107-778-21	s	CAP, ELECT 470MF 10X10
C25	1-107-778-21	s	CAP, ELECT 470MF 10X10
C26	1-107-778-21	s	CAP, ELECT 470MF 10X10
C27	1-107-778-21	s	CAP, ELECT 470MF 10X10
C28	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C29	1-115-340-91	s	CAP, CERAMIC 0.22MF B (2012)
C30	1-165-947-91	s	CAP, CHIP CERAMIC 2.2MF B 3225
C31	1-107-967-91	s	CAP, ELECT 1.0MF
C32	1-107-967-91	s	CAP, ELECT 1.0MF
C33	1-107-967-91	s	CAP, ELECT 1.0MF
C34	1-107-967-91	s	CAP, ELECT 1.0MF
C35	1-107-967-91	s	CAP, ELECT 1.0MF
C36	1-107-967-91	s	CAP, ELECT 1.0MF
C37	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C100	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C101	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C103	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C104	1-107-960-91	s	CAP, ELECT 4.7MF
C105	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C106	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C109	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C200	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C201	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C202	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C203	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C204	1-107-960-91	s	CAP, ELECT 4.7MF
C205	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C206	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C207	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C209	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
CN201	1-778-551-21	o	PIN, CONNECTOR 20P
CN220	1-562-708-51	s	CONNECTOR, FFC/FPC(ZIF) ST 13P

(DT-47 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D2	8-719-024-83	s	DIODE 1SS301-TE85L
D3	8-719-024-81	s	DIODE 1SS300-TE85L
D4	8-719-024-81	s	DIODE 1SS300-TE85L
D5	8-719-947-85	s	DIODE ERB44-08
D6	8-719-947-85	s	DIODE ERB44-08
D7	8-719-947-85	s	DIODE ERB44-08
D8	8-719-947-85	s	DIODE ERB44-08
D100	8-719-820-42	s	DIODE 1SS302-TE85L
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D200	8-719-820-42	s	DIODE 1SS302-TE85L
D201	8-719-024-81	s	DIODE 1SS300-TE85L
E1	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-533-483-21	s	FUSE (SMD) (1.6A/125V)
IC1	8-759-524-02	s	IC TC4053BF(EL,N)
IC2	8-759-422-21	s	IC NJM4580V(TE2)
IC3	8-759-422-21	s	IC NJM4580V(TE2)
IC4	8-759-422-21	s	IC NJM4580V(TE2)
IC5	8-759-422-21	s	IC NJM4580V(TE2)
IC6	8-759-422-21	s	IC NJM4580V(TE2)
IC7	8-759-338-95	s	IC NJM2903V(TE2)
IC8	8-759-183-53	s	IC TL431CPK-E2
IC9	8-759-157-42	s	IC TL082CPS-E20
IC10	8-759-157-42	s	IC TL082CPS-E20
L1	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L2	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L3	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L4	1-416-511-21	s	COIL, CHOKE 47.0UH
L5	1-416-511-21	s	COIL, CHOKE 47.0UH
L6	1-410-093-41	s	MICRO INDUCTOR 33MMH
L7	1-410-093-41	s	MICRO INDUCTOR 33MMH
L8	1-410-093-41	s	MICRO INDUCTOR 33MMH
L9	1-410-093-41	s	MICRO INDUCTOR 33MMH
Q1	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q2	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q3	8-729-024-98	s	TRANSISTOR 2SC3518-ZL-E2
Q4	8-729-024-98	s	TRANSISTOR 2SC3518-ZL-E2
Q5	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q6	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q100	8-729-105-96	s	TRANSISTOR 2SA1156-2L
Q101	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q102	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q103	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q104	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q105	8-729-118-43	s	TRANSISTOR 2SA1413-L
Q200	8-729-105-96	s	TRANSISTOR 2SA1156-2L
Q201	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q202	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q203	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q204	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q205	8-729-118-43	s	TRANSISTOR 2SA1413-L
R1	1-218-823-91	s	RES, CHIP 100 (1608)
R2	1-218-887-91	s	RES, CHIP 47K (1608)
R3	1-218-871-91	s	RES, CHIP 10K (1608)
R4	1-218-871-91	s	RES, CHIP 10K (1608)
R5	1-218-871-91	s	RES, CHIP 10K (1608)
R6	1-218-890-91	s	RES, CHIP 62K (1608)

(DT-47 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-218-882-91	s	RES, CHIP 30K (1608)
R8	1-218-855-91	s	RES, CHIP 2.2K (1608)
R11	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R12	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R13	1-220-264-91	s	RES,SQUARE TYPE CHIP 1.0K 3225
R14	1-218-823-91	s	RES, CHIP 100 (1608)
R15	1-218-871-91	s	RES, CHIP 10K (1608)
R100	1-218-863-91	s	RES, CHIP 4.7K (1608)
R101	1-218-863-91	s	RES, CHIP 4.7K (1608)
R102	1-218-885-91	s	RES, CHIP 39K (1608)
R103	1-218-885-91	s	RES, CHIP 39K (1608)
R104	1-218-887-91	s	RES, CHIP 47K (1608)
R105	1-218-863-91	s	RES, CHIP 4.7K (1608)
R106	1-218-871-91	s	RES, CHIP 10K (1608)
R107	1-220-340-91	s	RES,SQUARE TYPE CHIP 470K 4532
R108	1-218-863-91	s	RES, CHIP 4.7K (1608)
R109	1-218-863-91	s	RES, CHIP 4.7K (1608)
R110	1-218-867-91	s	RES, CHIP 6.8K (1608)
R111	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R112	1-218-879-91	s	RES, CHIP 22K (1608)
R114	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R115	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R116	1-211-981-91	s	RES, CHIP 33 (1608)
R117	1-211-981-91	s	RES, CHIP 33 (1608)
R118	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R119	1-216-857-91	s	RES, CHIP 1.0M (1608)
R120	1-216-857-91	s	RES, CHIP 1.0M (1608)
R121	1-218-891-91	s	RES, CHIP 68K (1608)
R122	1-218-871-91	s	RES, CHIP 10K (1608)
R123	1-216-857-91	s	RES, CHIP 1.0M (1608)
R124	1-218-903-91	s	RES, CHIP 220K (1608)
R125	1-218-871-91	s	RES, CHIP 10K (1608)
R126	1-218-903-91	s	RES, CHIP 220K (1608)
R127	1-218-823-91	s	RES, CHIP 100 (1608)
R128	1-218-861-91	s	RES, CHIP 3.9K (1608)
R200	1-218-863-91	s	RES, CHIP 4.7K (1608)
R201	1-218-863-91	s	RES, CHIP 4.7K (1608)
R202	1-218-885-91	s	RES, CHIP 39K (1608)
R203	1-218-885-91	s	RES, CHIP 39K (1608)
R204	1-218-887-91	s	RES, CHIP 47K (1608)
R205	1-218-863-91	s	RES, CHIP 4.7K (1608)
R206	1-218-871-91	s	RES, CHIP 10K (1608)
R207	1-220-340-91	s	RES,SQUARE TYPE CHIP 470K 4532
R208	1-218-863-91	s	RES, CHIP 4.7K (1608)
R209	1-218-863-91	s	RES, CHIP 4.7K (1608)
R210	1-218-867-91	s	RES, CHIP 6.8K (1608)
R211	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R212	1-218-879-91	s	RES, CHIP 22K (1608)
R214	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R215	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R216	1-211-981-91	s	RES, CHIP 33 (1608)
R217	1-211-981-91	s	RES, CHIP 33 (1608)
R218	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R219	1-216-857-91	s	RES, CHIP 1.0M (1608)
R220	1-216-857-91	s	RES, CHIP 1.0M (1608)
R221	1-218-891-91	s	RES, CHIP 68K (1608)
R222	1-218-871-91	s	RES, CHIP 10K (1608)
R223	1-216-857-91	s	RES, CHIP 1.0M (1608)
R224	1-218-903-91	s	RES, CHIP 220K (1608)

(DT-47 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R225	1-218-871-91	s	RES, CHIP 10K (1608)
R226	1-218-903-91	s	RES, CHIP 220K (1608)
R227	1-218-823-91	s	RES, CHIP 100 (1608)
R228	1-218-861-91	s	RES, CHIP 3.9K (1608)
R229	1-216-857-91	s	RES, CHIP 1.0M (1608)
R230	1-216-857-91	s	RES, CHIP 1.0M (1608)
RY1	1-755-381-21	s	RELAY
T1	1-448-937-12	s	TRANSFORMER, CONVERTER
TP100	1-535-877-22	s	CHIP, CHECKER
TP200	1-535-877-22	s	CHIP, CHECKER

DT-48 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1376-886-A	s	MOUNTED CIRCUIT BOARD, DT-48
1pc	1-803-490-12	s	SENSOR, DEW CONDENSATION
1pc	4-641-552-01	o	SADDLE, LOCK EDGE
1pc	7-621-772-10	s	SCREW +B 2X4
1pc	7-682-948-01	s	SCREW +PSW 3X8
C1	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C2	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C3	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C4	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C5	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C6	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C7	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C8	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C9	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C10	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C11	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C12	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C13	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C14	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C15	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C16	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C17	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C20	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C21	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C100	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C101	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C103	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C104	1-107-960-91	s	CAP, ELECT 4.7MF
C105	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C106	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C109	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C200	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C201	1-162-922-91	s	CAP, CERAMIC 39PF CH 1608
C202	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C203	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C204	1-107-960-91	s	CAP, ELECT 4.7MF
C205	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C206	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C207	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C209	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C300	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C301	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C302	1-162-964-91	s	CAP,CHIP CERAMIC 1000PF B 1608
C303	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C304	1-137-894-21	s	CAP, ELECT (CHIP TYPE) 470MF
C305	1-137-894-21	s	CAP, ELECT (CHIP TYPE) 470MF
C306	1-137-894-21	s	CAP, ELECT (CHIP TYPE) 470MF
C307	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C308	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C309	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C310	1-107-967-91	s	CAP, ELECT 1.0MF
C311	1-107-967-91	s	CAP, ELECT 1.0MF
CN201	1-778-551-21	o	PIN, CONNECTOR 20P
CN220	1-562-708-51	s	CONNECTOR, FFC/FPC(ZIF) ST 13P
D2	8-719-024-83	s	DIODE 1SS301-TE85L
D3	8-719-024-81	s	DIODE 1SS300-TE85L
D4	8-719-024-81	s	DIODE 1SS300-TE85L
D100	8-719-820-42	s	DIODE 1SS302-TE85L

(DT-48 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D101	8-719-024-81	s	DIODE 1SS300-TE85L
D200	8-719-820-42	s	DIODE 1SS302-TE85L
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D300	8-719-161-03	s	DIODE RD10SB-T1
D301	8-719-037-37	s	DIODE RD18SB-T1
D302	8-719-037-37	s	DIODE RD18SB-T1
D303	8-719-082-73	s	DIODE AP01CV1
D304	8-719-082-73	s	DIODE AP01CV1
D305	8-719-082-73	s	DIODE AP01CV1
D306	8-719-082-73	s	DIODE AP01CV1
E1	1-535-877-22	s	CHIP, CHECKER
F300	⚠ 1-576-269-21	s	FUSE (SMD) (3.15A/125V)
IC1	8-759-524-02	s	IC TC4053BF(EL,N)
IC2	8-759-422-21	s	IC NJM4580V(TE2)
IC3	8-759-422-21	s	IC NJM4580V(TE2)
IC4	8-759-422-21	s	IC NJM4580V(TE2)
IC5	8-759-422-21	s	IC NJM4580V(TE2)
IC6	8-759-422-21	s	IC NJM4580V(TE2)
IC7	8-759-338-95	s	IC NJM2903V(TE2)
IC8	8-759-183-53	s	IC TL431CPK-E2
IC9	8-759-157-42	s	IC TL082CPS-E20
IC10	8-759-157-42	s	IC TL082CPS-E20
IC300	6-707-828-01	s	IC MM1431ANRE
IC301	8-759-264-50	s	IC MB3759PF-ER
L1	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L2	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L300	1-414-402-41	s	INDUCTOR (SMD) 47.0UH
L301	1-424-723-21	s	COIL, CHOKE 1.0UH
L302	1-416-511-21	s	COIL, CHOKE 47.0UH
L303	1-416-511-21	s	COIL, CHOKE 47.0UH
Q1	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q2	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q5	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q6	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q100	8-729-105-96	s	TRANSISTOR 2SA1156-2L
Q101	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q102	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q103	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q104	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q105	8-729-118-43	s	TRANSISTOR 2SA1413-L
Q200	8-729-105-96	s	TRANSISTOR 2SA1156-2L
Q201	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q202	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q203	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q204	8-729-141-78	s	TRANSISTOR 2SC3632-K
Q205	8-729-118-43	s	TRANSISTOR 2SA1413-L
Q300	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q301	6-551-280-01	s	TRANSISTOR RSS070N05FQ4TB
Q302	8-729-230-50	s	TRANSISTOR 2SC2712-YG-TE85L
Q303	8-729-230-47	s	TRANSISTOR 2SA1162-YG-TE85L
Q304	8-729-230-50	s	TRANSISTOR 2SC2712-YG-TE85L
Q305	8-729-230-47	s	TRANSISTOR 2SA1162-YG-TE85L
Q306	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q307	8-729-928-37	s	TRANSISTOR DTA114EE-TL
Q308	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-218-823-91	s	RES, CHIP 100 (1608)

(DT-48 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2	1-218-887-91	s	RES, CHIP 47K (1608)
R3	1-218-871-91	s	RES, CHIP 10K (1608)
R4	1-218-871-91	s	RES, CHIP 10K (1608)
R5	1-218-871-91	s	RES, CHIP 10K (1608)
R6	1-218-890-91	s	RES, CHIP 62K (1608)
R7	1-218-882-91	s	RES, CHIP 30K (1608)
R8	1-218-855-91	s	RES, CHIP 2.2K (1608)
R14	1-218-823-91	s	RES, CHIP 100 (1608)
R15	1-218-871-91	s	RES, CHIP 10K (1608)
R100	1-218-863-91	s	RES, CHIP 4.7K (1608)
R101	1-218-863-91	s	RES, CHIP 4.7K (1608)
R102	1-218-885-91	s	RES, CHIP 39K (1608)
R103	1-218-885-91	s	RES, CHIP 39K (1608)
R104	1-218-887-91	s	RES, CHIP 47K (1608)
R105	1-218-863-91	s	RES, CHIP 4.7K (1608)
R106	1-218-871-91	s	RES, CHIP 10K (1608)
R107	1-220-340-91	s	RES,SQUARE TYPE CHIP 470K 4532
R108	1-218-863-91	s	RES, CHIP 4.7K (1608)
R109	1-218-863-91	s	RES, CHIP 4.7K (1608)
R110	1-218-867-91	s	RES, CHIP 6.8K (1608)
R111	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R112	1-218-879-91	s	RES, CHIP 22K (1608)
R114	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R115	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R116	1-211-981-91	s	RES, CHIP 33 (1608)
R117	1-211-981-91	s	RES, CHIP 33 (1608)
R118	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R119	1-216-857-91	s	RES, CHIP 1.0M (1608)
R120	1-216-857-91	s	RES, CHIP 1.0M (1608)
R121	1-218-891-91	s	RES, CHIP 68K (1608)
R122	1-218-871-91	s	RES, CHIP 10K (1608)
R123	1-216-857-91	s	RES, CHIP 1.0M (1608)
R124	1-218-903-91	s	RES, CHIP 220K (1608)
R125	1-218-871-91	s	RES, CHIP 10K (1608)
R126	1-218-903-91	s	RES, CHIP 220K (1608)
R127	1-218-823-91	s	RES, CHIP 100 (1608)
R128	1-218-861-91	s	RES, CHIP 3.9K (1608)
R200	1-218-863-91	s	RES, CHIP 4.7K (1608)
R201	1-218-863-91	s	RES, CHIP 4.7K (1608)
R202	1-218-885-91	s	RES, CHIP 39K (1608)
R203	1-218-885-91	s	RES, CHIP 39K (1608)
R204	1-218-887-91	s	RES, CHIP 47K (1608)
R205	1-218-863-91	s	RES, CHIP 4.7K (1608)
R206	1-218-871-91	s	RES, CHIP 10K (1608)
R207	1-220-340-91	s	RES,SQUARE TYPE CHIP 470K 4532
R208	1-218-863-91	s	RES, CHIP 4.7K (1608)
R209	1-218-863-91	s	RES, CHIP 4.7K (1608)
R210	1-218-867-91	s	RES, CHIP 6.8K (1608)
R211	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R212	1-218-879-91	s	RES, CHIP 22K (1608)
R214	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R215	1-220-332-91	s	RES,SQUARE TYPE CHIP 100K 4532
R216	1-211-981-91	s	RES, CHIP 33 (1608)
R217	1-211-981-91	s	RES, CHIP 33 (1608)
R218	1-218-369-91	s	RES,SQUARE TYPE CHIP 2.2K 4532
R219	1-216-857-91	s	RES, CHIP 1.0M (1608)
R220	1-216-857-91	s	RES, CHIP 1.0M (1608)
R221	1-218-891-91	s	RES, CHIP 68K (1608)
R222	1-218-871-91	s	RES, CHIP 10K (1608)

(DT-48 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R223	1-216-857-91	s	RES, CHIP 1.0M (1608)
R224	1-218-903-91	s	RES, CHIP 220K (1608)
R225	1-218-871-91	s	RES, CHIP 10K (1608)
R226	1-218-903-91	s	RES, CHIP 220K (1608)
R227	1-218-823-91	s	RES, CHIP 100 (1608)
R228	1-218-861-91	s	RES, CHIP 3.9K (1608)
R300	1-218-863-91	s	RES, CHIP 4.7K (1608)
R301	1-218-871-91	s	RES, CHIP 10K (1608)
R302	1-218-851-91	s	RES, CHIP 1.5K (1608)
R303	1-218-863-91	s	RES, CHIP 4.7K (1608)
R304	1-218-887-91	s	RES, CHIP 47K (1608)
R305	1-218-903-91	s	RES, CHIP 220K (1608)
R306	1-218-863-91	s	RES, CHIP 4.7K (1608)
R307	1-218-863-91	s	RES, CHIP 4.7K (1608)
R308	1-218-887-91	s	RES, CHIP 47K (1608)
R309	1-218-871-91	s	RES, CHIP 10K (1608)
R310	1-218-871-91	s	RES, CHIP 10K (1608)
R311	1-218-851-91	s	RES, CHIP 1.5K (1608)
R312	1-218-871-91	s	RES, CHIP 10K (1608)
R313	1-218-851-91	s	RES, CHIP 1.5K (1608)
R314	1-211-977-91	s	RES, CHIP 22 (1608)
R315	1-211-977-91	s	RES, CHIP 22 (1608)
R316	1-218-871-91	s	RES, CHIP 10K (1608)
R317	1-218-823-91	s	RES, CHIP 100 (1608)
R318	1-218-871-91	s	RES, CHIP 10K (1608)
R319	1-218-895-91	s	RES, CHIP 100K (1608)
R320	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R321	1-220-321-91	s	RES,SQUARE TYPE CHIP 470K 3225
R322	1-220-321-91	s	RES,SQUARE TYPE CHIP 470K 3225
R323	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R324	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R325	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R326	1-220-317-91	s	RES,SQUARE TYPE CHIP 220K 3225
R327	1-216-864-91	s	CONDUCTOR, CHIP (1608)
RY1	1-755-381-21	s	RELAY
T300	1-445-266-11	s	TRANSFORMER, DC-DC CONVERTER
TP100	1-535-877-22	s	CHIP, CHECKER
TP200	1-535-877-22	s	CHIP, CHECKER

DVP-43 BOARD (HKSR-5802)

---

*a: For suffix 11

*b: For suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C107	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C115	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C117	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C118	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C119	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C163	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C570	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C576	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C580	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C582	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C584	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C586	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C588	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C589	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C590	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C591	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C592	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C593	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C594	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C595	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C596	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C598	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C639	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C671	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C672	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C673	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C674	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C676	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C677	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C678	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C702	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C729	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C741	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C744	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C758	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C761	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C762	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C763	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C769	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C771	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C777	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C778	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C781	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C782	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C783	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C790	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C797	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C799	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C801	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C802	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C810	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C972	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C973	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C974	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C975	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C976	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C977	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C978	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C979	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C980	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C981	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C982	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C983	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C984	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C985	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C986	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C987	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C992	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C993	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C994	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C995	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C996	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C997	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C998	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C999	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1028	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1029	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1031	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1033	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1035	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1037	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1039	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1041	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1046	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1047	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1049	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1050	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1056	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1059	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1060	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1062	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1064	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1065	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1066	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1069	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1104	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1138	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1139	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1151	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1200	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C1201	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C1202	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C1203	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C1204	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C1205	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C1206	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1214	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C1217	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C1218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C1220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1400	1-135-348-21	s	CAP, ELECT 150MF (10X8)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C1401	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C1402	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1403	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1404	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1405	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1411	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C1412	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1418	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1419	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1420	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C1426	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C1427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1431	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1432	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1433	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1435	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1436	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1437	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1441	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C1443	1-135-346-21	s	CAP, ELECT 39MF (6.3X6)
C1444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1446	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C1447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1451	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1452	1-100-827-21	s	CAP, ELECT 150MF (8X7)
C1453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1455	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1457	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1458	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1459	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1460	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1461	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1463	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1464	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1465	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1466	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1467	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
C1503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1505	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1506	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1507	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1508	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1509	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1510	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1512	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1513	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1514	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1515	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1525	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1526	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1527	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1528	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1529	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1532	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1538	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1541	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
CN200	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN1000	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1400	8-719-066-98	s	DIODE RB051L-40TE25
D1401	8-719-938-77	s	DIODE SB05-05C-TB-E
D1402	8-719-063-83	s	DIODE SML-510MWT86
D1403	8-719-077-09	s	DIODE CL-196HR-CD-T
D1404	8-719-063-83	s	DIODE SML-510MWT86
D1405	8-719-077-09	s	DIODE CL-196HR-CD-T
D1406	8-719-063-83	s	DIODE SML-510MWT86
E1400	1-535-877-22	s	CHIP, CHECKER
E1401	1-535-877-22	s	CHIP, CHECKER
E1402	1-535-877-22	s	CHIP, CHECKER
E1403	1-535-877-22	s	CHIP, CHECKER
E1404	1-535-877-22	s	CHIP, CHECKER
E1405	1-535-877-22	s	CHIP, CHECKER
E1406	1-535-877-22	s	CHIP, CHECKER
E1407	1-535-877-22	s	CHIP, CHECKER
E1408	1-535-877-22	s	CHIP, CHECKER
E1409	1-535-877-22	s	CHIP, CHECKER
E1410	1-535-877-22	s	CHIP, CHECKER
E1411	1-535-877-22	s	CHIP, CHECKER
E1412	1-535-877-22	s	CHIP, CHECKER
E1413	1-535-877-22	s	CHIP, CHECKER
E1414	1-535-877-22	s	CHIP, CHECKER
E1415	1-535-877-22	s	CHIP, CHECKER
F1400	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F1401	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F1402	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB800	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB900	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1000	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1105	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1106	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1107	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1204	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1205	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1206	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1207	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1210	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1211	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1300	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC101	6-708-277-01	s	IC CDCVF25081PWR

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
IC102	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC103	8-759-573-97	s	IC SN74LVC541APWR
IC104	6-700-764-01	s	IC DS90CR288AMTDX
IC105	6-701-990-01	s	IC SN74LVC257APWR
IC107	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC108	8-759-392-77	s	IC SN74LVC245APWR
IC109	8-759-392-77	s	IC SN74LVC245APWR
IC110	8-759-392-77	s	IC SN74LVC245APWR
IC202	6-700-804-01	s	IC SN74LVC574APWR
IC203	6-700-804-01	s	IC SN74LVC574APWR
IC204	6-700-804-01	s	IC SN74LVC574APWR
IC205	6-700-804-01	s	IC SN74LVC574APWR
IC206	6-700-804-01	s	IC SN74LVC574APWR
IC207	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC303	8-752-373-24	s	IC CXK48324R-1-T6
IC304	8-752-373-24	s	IC CXK48324R-1-T6
IC305	8-752-373-24	s	IC CXK48324R-1-T6
IC306	8-752-373-24	s	IC CXK48324R-1-T6
IC307	8-752-373-24	s	IC CXK48324R-1-T6
IC401	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC402	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC403	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC404	8-759-676-70	s	IC MSM56V16160F-10TS-K
IC405	8-759-676-70	s	IC MSM56V16160F-10TS-K
IC406	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC501	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC502	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC601	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC602	6-701-499-01	s	IC SN74LVC821APWR
IC603	6-701-499-01	s	IC SN74LVC821APWR
IC605	6-700-804-01	s	IC SN74LVC574APWR
IC606	6-700-804-01	s	IC SN74LVC574APWR
IC607	6-700-804-01	s	IC SN74LVC574APWR
IC701	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC702	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC703	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC800	6-700-763-01	s	IC DS90CR287MTDX
IC1001	8-759-573-97	s	IC SN74LVC541APWR
IC1002	8-759-573-97	s	IC SN74LVC541APWR
IC1003	6-701-990-01	s	IC SN74LVC257APWR
IC1005	8-759-573-97	s	IC SN74LVC541APWR
IC1009	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1011*b	6-707-621-01	o	IC S29AL016D70TFI020
IC1012	8-759-573-97	s	IC SN74LVC541APWR
IC1101	8-759-573-97	s	IC SN74LVC541APWR
IC1102	8-759-669-44	s	IC SN74LVC74APWR-12
IC1103	6-708-277-01	s	IC CDCVF25081PWR
IC1104	6-708-277-01	s	IC CDCVF25081PWR
IC1105	8-759-573-97	s	IC SN74LVC541APWR
IC1106	6-708-277-01	s	IC CDCVF25081PWR
IC1107	6-701-990-01	s	IC SN74LVC257APWR
IC1108	8-759-689-09	s	IC SN65LVDT2DBVR
IC1109	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1110	8-759-689-09	s	IC SN65LVDT2DBVR
IC1200	6-709-647-01	s	IC TLC2932AIPWR
IC1201	6-709-647-01	s	IC TLC2932AIPWR
IC1202	8-759-573-97	s	IC SN74LVC541APWR
IC1203	6-701-990-01	s	IC SN74LVC257APWR
IC1205	8-759-573-97	s	IC SN74LVC541APWR

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
IC1206	8-759-573-97	s	IC SN74LVC541APWR
IC1207	8-759-573-97	s	IC SN74LVC541APWR
IC1208	8-759-573-97	s	IC SN74LVC541APWR
IC1209	8-759-678-15	s	IC TLV2231CDBVR
IC1210	8-759-678-15	s	IC TLV2231CDBVR
IC1211	6-707-872-01	s	IC TC74VHC221AFT(EKJ)
IC1212	8-759-679-53	s	IC SN74LVC244APWR
IC1213	8-759-678-15	s	IC TLV2231CDBVR
IC1214	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC1215	8-759-679-53	s	IC SN74LVC244APWR
IC1216	8-759-678-15	s	IC TLV2231CDBVR
IC1301	8-759-573-97	s	IC SN74LVC541APWR
IC1302	8-759-573-97	s	IC SN74LVC541APWR
IC1303	8-759-573-97	s	IC SN74LVC541APWR
IC1304	8-759-392-77	s	IC SN74LVC245APWR
IC1305	8-759-392-77	s	IC SN74LVC245APWR
IC1307	8-759-573-97	s	IC SN74LVC541APWR
IC1308	8-759-392-77	s	IC SN74LVC245APWR
IC1309	8-759-392-77	s	IC SN74LVC245APWR
IC1310	8-759-392-77	s	IC SN74LVC245APWR
IC1311	8-759-573-97	s	IC SN74LVC541APWR
IC1312	8-759-573-97	s	IC SN74LVC541APWR
IC1315	8-759-679-55	s	IC SN74LVC08APWR
IC1317	6-708-277-01	s	IC CDCVF25081PWR
IC1319	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC1320	6-708-277-01	s	IC CDCVF25081PWR
IC1400	8-759-533-85	s	IC L88M05T-FA-TL
IC1401	8-759-583-47	s	IC UPC2933T-E2
IC1402	6-700-398-01	s	IC UPC2918T-E1
IC1403	8-759-597-57	s	IC LTC1628CG#TR
IC1404	8-759-696-35	s	IC TPS7101QDR
IC1406	6-700-399-01	s	IC UPC2925T-E1
IC1408	6-707-035-01	s	IC LP2996MRX
IC1409	6-701-572-01	s	IC TPS54610PWPR
L701	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L702	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1400	1-416-948-21	s	COIL, CHOKE 10UH
L1401	1-419-491-21	s	COIL, CHOKE 10UH
L1402	1-419-491-21	s	COIL, CHOKE 10UH
L1403	1-416-948-21	s	COIL, CHOKE 10UH
L1404	1-419-491-21	s	COIL, CHOKE 10UH
L1405	1-400-161-21	s	INDUCTOR 1.2UH
L1406	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q1201	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q1202	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q1400	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q1401	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q1402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1405	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1406	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1407	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1408	6-550-750-01	s	TRANSISTOR SSM3K15FS-TE85L
R100	1-218-941-11	s	RES, CHIP 100 (1005)
R101	1-218-941-11	s	RES, CHIP 100 (1005)
R102	1-218-941-11	s	RES, CHIP 100 (1005)
R103	1-218-941-11	s	RES, CHIP 100 (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R104	1-218-941-11	s	RES, CHIP 100 (1005)
R105	1-208-635-11	s	RES, CHIP 10 (1005)
R106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R107	1-208-683-11	s	RES, CHIP 1.0K (1005)
R108	1-208-911-81	s	RES, CHIP 10K (1005)
R109	1-208-683-11	s	RES, CHIP 1.0K (1005)
R110	1-208-699-11	s	RES, CHIP 4.7K (1005)
R111	1-208-643-11	s	RES, CHIP 22 (1005)
R112	1-208-855-81	s	RES, CHIP 47 (1005)
R114	1-208-855-81	s	RES, CHIP 47 (1005)
R116	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R122	1-208-855-81	s	RES, CHIP 47 (1005)
R123	1-208-643-11	s	RES, CHIP 22 (1005)
R124	1-208-855-81	s	RES, CHIP 47 (1005)
R125	1-208-855-81	s	RES, CHIP 47 (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R134	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R137	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R141	1-208-855-81	s	RES, CHIP 47 (1005)
R142	1-208-855-81	s	RES, CHIP 47 (1005)
R143	1-208-855-81	s	RES, CHIP 47 (1005)
R144	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R146	1-208-643-11	s	RES, CHIP 22 (1005)
R147	1-208-643-11	s	RES, CHIP 22 (1005)
R150 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R151 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R200	1-208-643-11	s	RES, CHIP 22 (1005)
R201	1-208-643-11	s	RES, CHIP 22 (1005)
R205	1-208-643-11	s	RES, CHIP 22 (1005)
R206	1-208-643-11	s	RES, CHIP 22 (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-208-643-11	s	RES, CHIP 22 (1005)
R210	1-208-643-11	s	RES, CHIP 22 (1005)
R211	1-208-643-11	s	RES, CHIP 22 (1005)
R212	1-208-643-11	s	RES, CHIP 22 (1005)
R213	1-208-643-11	s	RES, CHIP 22 (1005)
R214	1-208-643-11	s	RES, CHIP 22 (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-911-81	s	RES, CHIP 10K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-855-81	s	RES, CHIP 47 (1005)
R221	1-208-643-11	s	RES, CHIP 22 (1005)
R301	1-218-937-81	s	RES, CHIP 47
R302	1-218-937-81	s	RES, CHIP 47
R303	1-218-937-81	s	RES, CHIP 47
R304	1-218-937-81	s	RES, CHIP 47
R305	1-218-937-81	s	RES, CHIP 47
R306	1-218-937-81	s	RES, CHIP 47
R307	1-218-937-81	s	RES, CHIP 47
R308	1-218-937-81	s	RES, CHIP 47

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R309	1-218-937-81	s	RES, CHIP 47
R310	1-218-937-81	s	RES, CHIP 47
R311	1-218-937-81	s	RES, CHIP 47
R312	1-218-937-81	s	RES, CHIP 47
R400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-208-857-81	s	RES, CHIP 56 (1005)
R402	1-208-857-81	s	RES, CHIP 56 (1005)
R403	1-208-857-81	s	RES, CHIP 56 (1005)
R404	1-208-857-81	s	RES, CHIP 56 (1005)
R405	1-208-857-81	s	RES, CHIP 56 (1005)
R406	1-208-857-81	s	RES, CHIP 56 (1005)
R407	1-208-857-81	s	RES, CHIP 56 (1005)
R408	1-220-882-81	s	RES, CHIP 33 (1005)
R409	1-220-882-81	s	RES, CHIP 33 (1005)
R410	1-220-882-81	s	RES, CHIP 33 (1005)
R411	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-220-882-81	s	RES, CHIP 33 (1005)
R414	1-208-671-11	s	RES, CHIP 330 (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-683-11	s	RES, CHIP 1.0K (1005)
R417	1-208-671-11	s	RES, CHIP 330 (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-208-935-81	s	RES, CHIP 100K (1005)
R423	1-208-911-81	s	RES, CHIP 10K (1005)
R424	1-208-911-81	s	RES, CHIP 10K (1005)
R425	1-208-911-81	s	RES, CHIP 10K (1005)
R426	1-208-935-81	s	RES, CHIP 100K (1005)
R427	1-208-935-81	s	RES, CHIP 100K (1005)
R428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-855-81	s	RES, CHIP 47 (1005)
R433	1-208-643-11	s	RES, CHIP 22 (1005)
R434	1-208-643-11	s	RES, CHIP 22 (1005)
R435	1-208-643-11	s	RES, CHIP 22 (1005)
R436	1-208-643-11	s	RES, CHIP 22 (1005)
R437	1-208-643-11	s	RES, CHIP 22 (1005)
R438	1-208-643-11	s	RES, CHIP 22 (1005)
R439	1-208-643-11	s	RES, CHIP 22 (1005)
R440	1-208-643-11	s	RES, CHIP 22 (1005)
R441	1-208-643-11	s	RES, CHIP 22 (1005)
R442	1-208-643-11	s	RES, CHIP 22 (1005)
R443	1-208-643-11	s	RES, CHIP 22 (1005)
R444	1-208-643-11	s	RES, CHIP 22 (1005)
R445	1-208-643-11	s	RES, CHIP 22 (1005)
R446	1-208-643-11	s	RES, CHIP 22 (1005)
R447	1-208-643-11	s	RES, CHIP 22 (1005)
R448	1-208-643-11	s	RES, CHIP 22 (1005)
R449	1-208-643-11	s	RES, CHIP 22 (1005)
R450	1-208-911-81	s	RES, CHIP 10K (1005)
R451	1-208-911-81	s	RES, CHIP 10K (1005)
R452	1-208-911-81	s	RES, CHIP 10K (1005)
R453	1-208-911-81	s	RES, CHIP 10K (1005)
R500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R506	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R511	1-208-643-11	s	RES, CHIP 22 (1005)
R512	1-208-643-11	s	RES, CHIP 22 (1005)
R513	1-208-643-11	s	RES, CHIP 22 (1005)
R514	1-208-643-11	s	RES, CHIP 22 (1005)
R515	1-208-643-11	s	RES, CHIP 22 (1005)
R516	1-208-643-11	s	RES, CHIP 22 (1005)
R517	1-208-643-11	s	RES, CHIP 22 (1005)
R519	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R535	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R539	1-208-643-11	s	RES, CHIP 22 (1005)
R540	1-208-643-11	s	RES, CHIP 22 (1005)
R541	1-208-643-11	s	RES, CHIP 22 (1005)
R542	1-208-643-11	s	RES, CHIP 22 (1005)
R543	1-208-643-11	s	RES, CHIP 22 (1005)
R544	1-208-643-11	s	RES, CHIP 22 (1005)
R545	1-208-643-11	s	RES, CHIP 22 (1005)
R547	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R550	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R600	1-208-913-81	s	RES, CHIP 12K (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-643-11	s	RES, CHIP 22 (1005)
R603	1-208-643-11	s	RES, CHIP 22 (1005)
R604	1-208-643-11	s	RES, CHIP 22 (1005)
R605	1-208-643-11	s	RES, CHIP 22 (1005)
R606	1-208-643-11	s	RES, CHIP 22 (1005)
R607	1-208-643-11	s	RES, CHIP 22 (1005)
R608	1-208-643-11	s	RES, CHIP 22 (1005)
R609	1-208-871-81	s	RES, CHIP 220 (1005)
R610	1-208-871-81	s	RES, CHIP 220 (1005)
R611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R612	1-208-699-11	s	RES, CHIP 4.7K (1005)
R613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R616	1-208-935-81	s	RES, CHIP 100K (1005)
R617	1-208-935-81	s	RES, CHIP 100K (1005)
R618	1-208-935-81	s	RES, CHIP 100K (1005)
R619	1-208-935-81	s	RES, CHIP 100K (1005)
R620	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R624 *b	1-208-643-11	s	RES, CHIP 22 (1005)
R701	1-218-939-11	s	RES, CHIP 68 (1005)
R702	1-218-939-11	s	RES, CHIP 68 (1005)
R703	1-218-939-11	s	RES, CHIP 68 (1005)
R704	1-218-939-11	s	RES, CHIP 68 (1005)
R705	1-208-855-81	s	RES, CHIP 47 (1005)
R706	1-208-855-81	s	RES, CHIP 47 (1005)
R707	1-208-643-11	s	RES, CHIP 22 (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R708	1-208-643-11	s	RES, CHIP 22 (1005)
R709	1-208-643-11	s	RES, CHIP 22 (1005)
R710	1-208-643-11	s	RES, CHIP 22 (1005)
R711	1-208-855-81	s	RES, CHIP 47 (1005)
R712	1-208-855-81	s	RES, CHIP 47 (1005)
R713	1-208-855-81	s	RES, CHIP 47 (1005)
R714	1-208-855-81	s	RES, CHIP 47 (1005)
R715	1-218-941-11	s	RES, CHIP 100 (1005)
R716	1-218-941-11	s	RES, CHIP 100 (1005)
R717	1-218-941-11	s	RES, CHIP 100 (1005)
R718	1-218-941-11	s	RES, CHIP 100 (1005)
R719	1-218-941-11	s	RES, CHIP 100 (1005)
R720	1-218-941-11	s	RES, CHIP 100 (1005)
R721	1-218-941-11	s	RES, CHIP 100 (1005)
R722	1-218-941-11	s	RES, CHIP 100 (1005)
R723	1-218-941-11	s	RES, CHIP 100 (1005)
R724	1-218-941-11	s	RES, CHIP 100 (1005)
R725	1-218-941-11	s	RES, CHIP 100 (1005)
R726	1-218-941-11	s	RES, CHIP 100 (1005)
R727	1-218-941-11	s	RES, CHIP 100 (1005)
R728	1-218-941-11	s	RES, CHIP 100 (1005)
R729	1-218-941-11	s	RES, CHIP 100 (1005)
R730	1-218-941-11	s	RES, CHIP 100 (1005)
R731	1-218-941-11	s	RES, CHIP 100 (1005)
R732	1-218-941-11	s	RES, CHIP 100 (1005)
R733	1-218-941-11	s	RES, CHIP 100 (1005)
R734	1-218-941-11	s	RES, CHIP 100 (1005)
R735	1-208-683-11	s	RES, CHIP 1.0K (1005)
R736	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R739	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R742	1-208-935-81	s	RES, CHIP 100K (1005)
R743	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R744	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R746	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R748	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R749	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R750	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R751	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R753	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R755	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R757	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R758	1-218-941-11	s	RES, CHIP 100 (1005)
R759	1-208-935-81	s	RES, CHIP 100K (1005)
R760	1-208-935-81	s	RES, CHIP 100K (1005)
R761	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R762	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R763	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R764	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R765	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R766	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R767	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R768	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R769	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R770	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R771	1-208-935-81	s	RES, CHIP 100K (1005)
R772	1-208-935-81	s	RES, CHIP 100K (1005)
R773	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R774	1-208-855-81	s	RES, CHIP 47 (1005)
R800	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R814	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R816	1-208-643-11	s	RES, CHIP 22 (1005)
R817	1-208-855-81	s	RES, CHIP 47 (1005)
R818	1-208-855-81	s	RES, CHIP 47 (1005)
R819	1-208-855-81	s	RES, CHIP 47 (1005)
R820	1-208-855-81	s	RES, CHIP 47 (1005)
R821 *a	1-208-643-11	s	RES, CHIP 22 (1005)
R822 *b	1-208-643-11	s	RES, CHIP 22 (1005)
R900	1-208-635-11	s	RES, CHIP 10 (1005)
R901	1-208-635-11	s	RES, CHIP 10 (1005)
R902	1-208-635-11	s	RES, CHIP 10 (1005)
R903	1-208-635-11	s	RES, CHIP 10 (1005)
R904	1-208-635-11	s	RES, CHIP 10 (1005)
R905	1-208-635-11	s	RES, CHIP 10 (1005)
R952	1-208-683-11	s	RES, CHIP 1.0K (1005)
R953	1-208-911-81	s	RES, CHIP 10K (1005)
R954	1-208-911-81	s	RES, CHIP 10K (1005)
R957	1-208-911-81	s	RES, CHIP 10K (1005)
R965	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R966	1-208-643-11	s	RES, CHIP 22 (1005)
R973	1-208-911-81	s	RES, CHIP 10K (1005)
R974	1-208-911-81	s	RES, CHIP 10K (1005)
R975	1-208-911-81	s	RES, CHIP 10K (1005)
R976	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R977	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R978	1-208-911-81	s	RES, CHIP 10K (1005)
R979	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R980	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-208-855-81	s	RES, CHIP 47 (1005)
R983	1-208-855-81	s	RES, CHIP 47 (1005)
R984	1-208-683-11	s	RES, CHIP 1.0K (1005)
R985	1-208-683-11	s	RES, CHIP 1.0K (1005)
R986	1-208-683-11	s	RES, CHIP 1.0K (1005)
R987	1-208-683-11	s	RES, CHIP 1.0K (1005)
R988	1-208-683-11	s	RES, CHIP 1.0K (1005)
R989	1-208-683-11	s	RES, CHIP 1.0K (1005)
R990 *b	1-208-635-11	s	RES, CHIP 10 (1005)
R991	1-208-683-11	s	RES, CHIP 1.0K (1005)
R992	1-208-683-11	s	RES, CHIP 1.0K (1005)
R993	1-208-683-11	s	RES, CHIP 1.0K (1005)
R994	1-208-683-11	s	RES, CHIP 1.0K (1005)
R995	1-208-683-11	s	RES, CHIP 1.0K (1005)
R996	1-208-683-11	s	RES, CHIP 1.0K (1005)
R997	1-208-683-11	s	RES, CHIP 1.0K (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R998	1-208-683-11	s	RES, CHIP 1.0K (1005)
R999	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1000	1-208-855-81	s	RES, CHIP 47 (1005)
R1001	1-208-911-81	s	RES, CHIP 10K (1005)
R1007	1-208-911-81	s	RES, CHIP 10K (1005)
R1008	1-208-911-81	s	RES, CHIP 10K (1005)
R1009	1-208-911-81	s	RES, CHIP 10K (1005)
R1010	1-208-643-11	s	RES, CHIP 22 (1005)
R1011	1-208-643-11	s	RES, CHIP 22 (1005)
R1012	1-208-643-11	s	RES, CHIP 22 (1005)
R1013	1-208-643-11	s	RES, CHIP 22 (1005)
R1014	1-208-643-11	s	RES, CHIP 22 (1005)
R1015	1-208-643-11	s	RES, CHIP 22 (1005)
R1016	1-208-643-11	s	RES, CHIP 22 (1005)
R1017	1-208-643-11	s	RES, CHIP 22 (1005)
R1018	1-208-911-81	s	RES, CHIP 10K (1005)
R1019	1-208-911-81	s	RES, CHIP 10K (1005)
R1020	1-208-911-81	s	RES, CHIP 10K (1005)
R1021	1-208-911-81	s	RES, CHIP 10K (1005)
R1022	1-208-911-81	s	RES, CHIP 10K (1005)
R1023	1-208-911-81	s	RES, CHIP 10K (1005)
R1024	1-208-911-81	s	RES, CHIP 10K (1005)
R1025	1-208-911-81	s	RES, CHIP 10K (1005)
R1026	1-208-911-81	s	RES, CHIP 10K (1005)
R1027	1-208-911-81	s	RES, CHIP 10K (1005)
R1028	1-208-911-81	s	RES, CHIP 10K (1005)
R1029	1-208-911-81	s	RES, CHIP 10K (1005)
R1030	1-208-911-81	s	RES, CHIP 10K (1005)
R1031	1-208-855-81	s	RES, CHIP 47 (1005)
R1032	1-208-855-81	s	RES, CHIP 47 (1005)
R1033	1-208-911-81	s	RES, CHIP 10K (1005)
R1035	1-208-911-81	s	RES, CHIP 10K (1005)
R1036	1-208-855-81	s	RES, CHIP 47 (1005)
R1037	1-208-855-81	s	RES, CHIP 47 (1005)
R1038	1-208-855-81	s	RES, CHIP 47 (1005)
R1039	1-208-855-81	s	RES, CHIP 47 (1005)
R1041	1-208-855-81	s	RES, CHIP 47 (1005)
R1042	1-208-643-11	s	RES, CHIP 22 (1005)
R1043	1-208-643-11	s	RES, CHIP 22 (1005)
R1044	1-208-643-11	s	RES, CHIP 22 (1005)
R1045	1-208-643-11	s	RES, CHIP 22 (1005)
R1046	1-208-643-11	s	RES, CHIP 22 (1005)
R1047	1-208-643-11	s	RES, CHIP 22 (1005)
R1048	1-208-643-11	s	RES, CHIP 22 (1005)
R1050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1052	1-208-643-11	s	RES, CHIP 22 (1005)
R1053	1-208-643-11	s	RES, CHIP 22 (1005)
R1055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1059	1-208-643-11	s	RES, CHIP 22 (1005)
R1063	1-208-643-11	s	RES, CHIP 22 (1005)
R1064	1-208-643-11	s	RES, CHIP 22 (1005)
R1065	1-208-643-11	s	RES, CHIP 22 (1005)
R1066	1-208-855-81	s	RES, CHIP 47 (1005)
R1067	1-208-911-81	s	RES, CHIP 10K (1005)
R1068	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1069	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1074	1-208-855-81	s	RES, CHIP 47 (1005)
R1075	1-208-911-81	s	RES, CHIP 10K (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R1100	1-208-643-11	s	RES, CHIP 22 (1005)
R1101	1-218-941-11	s	RES, CHIP 100 (1005)
R1102	1-218-941-11	s	RES, CHIP 100 (1005)
R1103	1-208-911-81	s	RES, CHIP 10K (1005)
R1104	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1105	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1106	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1107	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1108	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1110	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1111	1-208-911-81	s	RES, CHIP 10K (1005)
R1113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1115	1-208-911-81	s	RES, CHIP 10K (1005)
R1116	1-208-635-11	s	RES, CHIP 10 (1005)
R1117	1-208-643-11	s	RES, CHIP 22 (1005)
R1118	1-208-643-11	s	RES, CHIP 22 (1005)
R1119	1-208-643-11	s	RES, CHIP 22 (1005)
R1120	1-208-643-11	s	RES, CHIP 22 (1005)
R1121	1-208-643-11	s	RES, CHIP 22 (1005)
R1122	1-208-643-11	s	RES, CHIP 22 (1005)
R1123	1-208-643-11	s	RES, CHIP 22 (1005)
R1124	1-208-643-11	s	RES, CHIP 22 (1005)
R1125	1-208-643-11	s	RES, CHIP 22 (1005)
R1126	1-208-643-11	s	RES, CHIP 22 (1005)
R1128	1-208-643-11	s	RES, CHIP 22 (1005)
R1129	1-208-643-11	s	RES, CHIP 22 (1005)
R1130	1-208-643-11	s	RES, CHIP 22 (1005)
R1131	1-208-643-11	s	RES, CHIP 22 (1005)
R1132	1-208-643-11	s	RES, CHIP 22 (1005)
R1133	1-208-643-11	s	RES, CHIP 22 (1005)
R1134	1-208-643-11	s	RES, CHIP 22 (1005)
R1136	1-208-643-11	s	RES, CHIP 22 (1005)
R1137	1-208-643-11	s	RES, CHIP 22 (1005)
R1138	1-208-643-11	s	RES, CHIP 22 (1005)
R1140	1-208-643-11	s	RES, CHIP 22 (1005)
R1141	1-208-643-11	s	RES, CHIP 22 (1005)
R1142	1-208-643-11	s	RES, CHIP 22 (1005)
R1143	1-208-643-11	s	RES, CHIP 22 (1005)
R1144	1-208-643-11	s	RES, CHIP 22 (1005)
R1145	1-208-643-11	s	RES, CHIP 22 (1005)
R1146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1147	1-208-643-11	s	RES, CHIP 22 (1005)
R1149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1150	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1155	1-208-643-11	s	RES, CHIP 22 (1005)
R1156	1-208-643-11	s	RES, CHIP 22 (1005)
R1157	1-208-635-11	s	RES, CHIP 10 (1005)
R1158	1-208-635-11	s	RES, CHIP 10 (1005)
R1159	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1160	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1161	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1162	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1163	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1164	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1171	1-208-635-11	s	RES, CHIP 10 (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R1172	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1173	1-208-855-81	s	RES, CHIP 47 (1005)
R1174	1-208-855-81	s	RES, CHIP 47 (1005)
R1175	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1176	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1179	1-208-911-81	s	RES, CHIP 10K (1005)
R1180	1-208-855-81	s	RES, CHIP 47 (1005)
R1181	1-208-855-81	s	RES, CHIP 47 (1005)
R1182	1-208-855-81	s	RES, CHIP 47 (1005)
R1183	1-208-855-81	s	RES, CHIP 47 (1005)
R1184	1-208-855-81	s	RES, CHIP 47 (1005)
R1185	1-208-855-81	s	RES, CHIP 47 (1005)
R1200	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1201	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1202	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1203	1-208-935-81	s	RES, CHIP 100K (1005)
R1204	1-208-935-81	s	RES, CHIP 100K (1005)
R1205	1-208-935-81	s	RES, CHIP 100K (1005)
R1209	1-208-867-81	s	RES, CHIP 150 (1005)
R1210	1-208-867-81	s	RES, CHIP 150 (1005)
R1213	1-208-913-81	s	RES, CHIP 12K (1005)
R1214	1-208-913-81	s	RES, CHIP 12K (1005)
R1215	1-208-913-81	s	RES, CHIP 12K (1005)
R1216	1-208-715-11	s	RES, CHIP 22K (1005)
R1217	1-218-941-11	s	RES, CHIP 100 (1005)
R1218	1-218-941-11	s	RES, CHIP 100 (1005)
R1219	1-218-941-11	s	RES, CHIP 100 (1005)
R1220	1-218-941-11	s	RES, CHIP 100 (1005)
R1221	1-208-867-81	s	RES, CHIP 150 (1005)
R1222	1-208-867-81	s	RES, CHIP 150 (1005)
R1223	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1224	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1225	1-208-855-81	s	RES, CHIP 47 (1005)
R1226	1-208-855-81	s	RES, CHIP 47 (1005)
R1227	1-208-855-81	s	RES, CHIP 47 (1005)
R1228	1-208-855-81	s	RES, CHIP 47 (1005)
R1229	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1231	1-208-943-81	s	RES, CHIP 220K (1005)
R1233	1-208-913-81	s	RES, CHIP 12K (1005)
R1234	1-218-941-11	s	RES, CHIP 100 (1005)
R1235	1-218-941-11	s	RES, CHIP 100 (1005)
R1236	1-208-855-81	s	RES, CHIP 47 (1005)
R1237	1-208-855-81	s	RES, CHIP 47 (1005)
R1240	1-208-855-81	s	RES, CHIP 47 (1005)
R1241	1-208-855-81	s	RES, CHIP 47 (1005)
R1242	1-208-855-81	s	RES, CHIP 47 (1005)
R1243	1-208-855-81	s	RES, CHIP 47 (1005)
R1246	1-208-643-11	s	RES, CHIP 22 (1005)
R1247	1-208-643-11	s	RES, CHIP 22 (1005)
R1248	1-208-643-11	s	RES, CHIP 22 (1005)
R1249	1-208-643-11	s	RES, CHIP 22 (1005)
R1250	1-208-643-11	s	RES, CHIP 22 (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1255	1-208-855-81	s	RES, CHIP 47 (1005)
R1256	1-208-855-81	s	RES, CHIP 47 (1005)
R1257	1-208-855-81	s	RES, CHIP 47 (1005)
R1258	1-208-855-81	s	RES, CHIP 47 (1005)
R1259	1-208-855-81	s	RES, CHIP 47 (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R1260	1-208-855-81	s	RES, CHIP 47 (1005)
R1261	1-208-855-81	s	RES, CHIP 47 (1005)
R1262	1-208-855-81	s	RES, CHIP 47 (1005)
R1263	1-208-855-81	s	RES, CHIP 47 (1005)
R1264	1-208-855-81	s	RES, CHIP 47 (1005)
R1265	1-208-855-81	s	RES, CHIP 47 (1005)
R1266	1-208-855-81	s	RES, CHIP 47 (1005)
R1267	1-208-855-81	s	RES, CHIP 47 (1005)
R1301	1-208-935-81	s	RES, CHIP 100K (1005)
R1303	1-208-935-81	s	RES, CHIP 100K (1005)
R1304	1-208-911-81	s	RES, CHIP 10K (1005)
R1305	1-208-935-81	s	RES, CHIP 100K (1005)
R1306	1-208-855-81	s	RES, CHIP 47 (1005)
R1307	1-208-855-81	s	RES, CHIP 47 (1005)
R1308	1-208-855-81	s	RES, CHIP 47 (1005)
R1309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1310	1-208-855-81	s	RES, CHIP 47 (1005)
R1311	1-208-911-81	s	RES, CHIP 10K (1005)
R1312	1-208-671-11	s	RES, CHIP 330 (1005)
R1313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1314	1-208-855-81	s	RES, CHIP 47 (1005)
R1315	1-208-643-11	s	RES, CHIP 22 (1005)
R1316	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1318	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1319	1-208-643-11	s	RES, CHIP 22 (1005)
R1320	1-208-643-11	s	RES, CHIP 22 (1005)
R1321	1-208-643-11	s	RES, CHIP 22 (1005)
R1322	1-208-643-11	s	RES, CHIP 22 (1005)
R1323	1-208-643-11	s	RES, CHIP 22 (1005)
R1324	1-208-643-11	s	RES, CHIP 22 (1005)
R1325	1-208-643-11	s	RES, CHIP 22 (1005)
R1326	1-208-643-11	s	RES, CHIP 22 (1005)
R1327	1-208-643-11	s	RES, CHIP 22 (1005)
R1328	1-208-643-11	s	RES, CHIP 22 (1005)
R1329	1-208-643-11	s	RES, CHIP 22 (1005)
R1330 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1331 *a	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1339	1-208-911-81	s	RES, CHIP 10K (1005)
R1340	1-208-911-81	s	RES, CHIP 10K (1005)
R1342	1-208-911-81	s	RES, CHIP 10K (1005)
R1344 *b	1-208-911-81	s	RES, CHIP 10K (1005)
R1345 *a	1-208-911-81	s	RES, CHIP 10K (1005)
R1346	1-208-911-81	s	RES, CHIP 10K (1005)
R1347	1-208-911-81	s	RES, CHIP 10K (1005)
R1348	1-208-911-81	s	RES, CHIP 10K (1005)
R1349	1-208-911-81	s	RES, CHIP 10K (1005)
R1350	1-208-911-81	s	RES, CHIP 10K (1005)
R1351	1-208-911-81	s	RES, CHIP 10K (1005)
R1352	1-208-911-81	s	RES, CHIP 10K (1005)
R1353	1-208-635-11	s	RES, CHIP 10 (1005)
R1354	1-208-911-81	s	RES, CHIP 10K (1005)
R1355	1-208-911-81	s	RES, CHIP 10K (1005)
R1356	1-208-911-81	s	RES, CHIP 10K (1005)
R1357	1-208-911-81	s	RES, CHIP 10K (1005)
R1358	1-208-911-81	s	RES, CHIP 10K (1005)
R1359	1-208-911-81	s	RES, CHIP 10K (1005)
R1360	1-208-643-11	s	RES, CHIP 22 (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R1361	1-208-643-11	s	RES, CHIP 22 (1005)
R1362	1-208-911-81	s	RES, CHIP 10K (1005)
R1363	1-208-911-81	s	RES, CHIP 10K (1005)
R1364	1-208-911-81	s	RES, CHIP 10K (1005)
R1365	1-208-911-81	s	RES, CHIP 10K (1005)
R1366	1-208-911-81	s	RES, CHIP 10K (1005)
R1367	1-208-911-81	s	RES, CHIP 10K (1005)
R1368	1-208-911-81	s	RES, CHIP 10K (1005)
R1369	1-208-911-81	s	RES, CHIP 10K (1005)
R1370	1-208-911-81	s	RES, CHIP 10K (1005)
R1371	1-208-643-11	s	RES, CHIP 22 (1005)
R1372	1-208-911-81	s	RES, CHIP 10K (1005)
R1373	1-208-911-81	s	RES, CHIP 10K (1005)
R1380	1-208-855-81	s	RES, CHIP 47 (1005)
R1381	1-208-855-81	s	RES, CHIP 47 (1005)
R1382	1-208-855-81	s	RES, CHIP 47 (1005)
R1385	1-208-855-81	s	RES, CHIP 47 (1005)
R1386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1389	1-208-643-11	s	RES, CHIP 22 (1005)
R1390	1-208-643-11	s	RES, CHIP 22 (1005)
R1391	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1392	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1393	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1394	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1395	1-208-643-11	s	RES, CHIP 22 (1005)
R1396	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1397	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1398	1-208-911-81	s	RES, CHIP 10K (1005)
R1400	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1401	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1402	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1403	1-218-446-91	s	RES, CHIP 1 (1608)
R1404	1-218-446-91	s	RES, CHIP 1 (1608)
R1405	1-208-935-81	s	RES, CHIP 100K (1005)
R1406	1-208-871-81	s	RES, CHIP 220 (1005)
R1407	1-208-911-81	s	RES, CHIP 10K (1005)
R1408	1-208-911-81	s	RES, CHIP 10K (1005)
R1409	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1410	1-208-855-81	s	RES, CHIP 47 (1005)
R1411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1412	1-208-943-81	s	RES, CHIP 220K (1005)
R1413	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1414	1-208-935-81	s	RES, CHIP 100K (1005)
R1415	1-208-939-81	s	RES, CHIP 150K (1005)
R1416	1-208-855-81	s	RES, CHIP 47 (1005)
R1417	1-208-855-81	s	RES, CHIP 47 (1005)
R1418	1-208-855-81	s	RES, CHIP 47 (1005)
R1419	1-208-855-81	s	RES, CHIP 47 (1005)
R1420	1-208-855-81	s	RES, CHIP 47 (1005)
R1424	1-208-911-81	s	RES, CHIP 10K (1005)
R1425	1-208-935-81	s	RES, CHIP 100K (1005)
R1426	1-208-935-81	s	RES, CHIP 100K (1005)
R1427	1-208-911-81	s	RES, CHIP 10K (1005)
R1428	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1429	1-208-911-81	s	RES, CHIP 10K (1005)
R1430	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1431	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1432	1-208-715-11	s	RES, CHIP 22K (1005)
R1433	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1435	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
R1436	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1437	1-208-855-81	s	RES, CHIP 47 (1005)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB119	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB200	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB201	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB208	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB209	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB210	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB211	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB213	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB214	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB215	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB216	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB217	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB309	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB310	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB311	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB312	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB313	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB314	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB315	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB316	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB317	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB318	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB319	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB320	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB321	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB322	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB323	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB324	1-234-375-21	s	RES, NETWORK 1K (1005X4)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
RB400	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB401	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB402	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB403	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB404	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB405	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB406	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB407	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB408	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB409	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB410	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB411	1-234-714-21	o	RES, NETWORK 56 (1005X4)
RB412	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB413	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB414	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB415	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB416	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB417	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB418	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB419	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB500	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB503	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB504	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB505	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB507	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB508	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB509	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB510	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB511	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB512	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB513	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB514	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB515	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB516	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB517	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB518	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB519	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB520	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB521	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB522	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB523	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB600	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB601	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB603	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB612	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB613	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB614	1-234-369-21	s	RES, NETWORK 10 (1005X4)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
RB615	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB616	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB617	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB618	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB619	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB620	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB701	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB702	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB703	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB704	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB705	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB706	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB707	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB708	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB709	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB710	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB711	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB712	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB713	1-239-409-11	s	RES, CHIP NETWORK 47 (3216)
RB714	1-239-409-11	s	RES, CHIP NETWORK 47 (3216)
RB715	1-239-409-11	s	RES, CHIP NETWORK 47 (3216)
RB716	1-239-409-11	s	RES, CHIP NETWORK 47 (3216)
RB717	1-239-409-11	s	RES, CHIP NETWORK 47 (3216)
RB722	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB723	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB724	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB725	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB726	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB800	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1001	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1003	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB1100	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1103	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB1104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1303	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1306	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1307	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1308	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1309	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1310	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1313	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1314	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1315	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1319	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1320	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1321	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1322	1-234-381-11	s	RES, NETWORK 100K (1005X4)

(DVP-43 BOARD (HKSR-5802))

Ref. No. or Q'ty	Part No.	SP	Description
RB1323	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1324	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB1325	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1326	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1327	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1328	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1329	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1330	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1331	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1332	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1333	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1334	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S200	1-692-270-41	s	SWITCH, SLIDE
S800	1-692-270-41	s	SWITCH, SLIDE
S1000	1-771-721-21	s	SWITCH, TACTILE
S1001	1-771-721-21	s	SWITCH, TACTILE
S1300	1-771-721-21	s	SWITCH, TACTILE
S1301	1-692-270-41	s	SWITCH, SLIDE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP800	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP803	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1100	1-535-877-22	s	CHIP, CHECKER
TP1101	1-535-877-22	s	CHIP, CHECKER
TP1102	1-535-877-22	s	CHIP, CHECKER
TP1103	1-535-877-22	s	CHIP, CHECKER
TP1104	1-535-877-22	s	CHIP, CHECKER
TP1300	1-535-877-22	s	CHIP, CHECKER
TP1301	1-535-877-22	s	CHIP, CHECKER
TP1302	1-535-877-22	s	CHIP, CHECKER
TP1303	1-535-877-22	s	CHIP, CHECKER
X1200	1-795-677-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X1201	1-795-676-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X1202	1-813-002-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X1203	1-813-001-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X1204	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X1205	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

EQ-102 BOARD
---

*a: For suffix 11
*b: For suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-734-A	s	MOUNTED CIRCUIT BOARD, EQ-102
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
12pcs	3-182-839-01	o	BRACKET, HEAT SINK RETAINER
12pcs	3-182-840-02	s	HEAT SINK (EQ)
6pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C121	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C122	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C123	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C129	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C130	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C131	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C132	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C137	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C138	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C139	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C140	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C141	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C142	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C143	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C144	1-131-995-21	s	CAP, ELECT 100MF (6.3X6)
C145	1-131-995-21	s	CAP, ELECT 100MF (6.3X6)
C146	1-117-949-81	s	CAP, CHIP CERAMIC 820PF B1005
C147	1-117-949-81	s	CAP, CHIP CERAMIC 820PF B1005
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C150	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C151	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C152	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C153	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C203 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C210 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C211 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C212 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C454 *a	1-127-573-91	s	CAP, CHIP CERAMIC 1MF B (2012)
*b	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C629	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C639	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C660	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C661	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C662	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C667	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C668	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C669	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C670	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C671	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C672	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C673	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C674	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C675	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C676	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C677	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C678	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C679	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C680	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C681	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C682	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C683	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C684	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C807	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C808	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C811	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C825	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C917	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C918	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C935 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C941	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C942	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C945	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C946	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C949	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C950	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C954	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C955	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1005	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1019	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1032	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1033	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1045	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1047	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1052	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1056	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1061	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1062	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C1200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1205	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1217	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1219	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1232	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1233	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1245	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1405	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1419	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1432	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1433	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1445	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1447	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1460	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C1600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1605	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1617	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1619	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1628	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1632	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1633	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1635	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1639	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1645	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1647	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1649	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1804	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1805	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1817	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1819	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1832	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1833	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1845	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1847	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1853	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1859	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1860	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2005	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2032	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2033	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2039	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2040	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2041	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2043	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2044	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2045	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C2046	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2047	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2050	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2052	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2053	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2055	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2206 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2209 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2212 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2215 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2216	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2231	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2246	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2261	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2276	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2296	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2298	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2299	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2307	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2308	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2309	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2323	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2324	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2325	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2326	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2328	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2330	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2331	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C2400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2407 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2408 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2413	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2414	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2447	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2453	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2463	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2467	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2469	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2474	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2475	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2476	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2477	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2478	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2479	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2481	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2488	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2489	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2490	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2493	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2494	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2495	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2496	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2497	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2498	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2499	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2606	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2619 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2622 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2625 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2626	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2628 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2631 *a	1-164-937-81	s	CAP, CHIP CERAMIC 1000PF B 1005
*b	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C2632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2633	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2634	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2644	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2646	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2647	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2814	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2829	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2900 *a	1-127-513-91	s	CAP, CHIP CERAMIC 1MF B (2012)
*b	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B
C2902	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2904	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C2905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2906	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C2907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2924	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2926	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2928 *a	1-127-513-91	s	CAP, CHIP CERAMIC 1MF B (2012)
*b	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C2929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2937	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2938	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2939	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2940	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2941	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2942	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2943	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2944	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2945	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2946	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2949	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN100	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN300	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN400	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN600	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN800	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN801	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN802	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1000	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1200	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN1400	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1600	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1800	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN2000	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN2200	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN2800	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN2900	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN2901	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN2902	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
D1200	8-719-074-31	s	DIODE CL-196YG-CD-T
D1600	8-719-074-31	s	DIODE CL-196YG-CD-T
D2000	8-719-074-31	s	DIODE CL-196YG-CD-T
D2800	8-719-074-31	s	DIODE CL-196YG-CD-T
D2801	8-719-074-31	s	DIODE CL-196YG-CD-T
D2802	8-719-074-31	s	DIODE CL-196YG-CD-T
D2803	8-719-074-31	s	DIODE CL-196YG-CD-T
D2804	8-719-074-31	s	DIODE CL-196YG-CD-T
D2805	8-719-074-31	s	DIODE CL-196YG-CD-T
D2900	8-719-941-84	s	DIODE DA204UT106
D2901	8-719-074-31	s	DIODE CL-196YG-CD-T
D2902	8-719-074-31	s	DIODE CL-196YG-CD-T
D2903	8-719-074-31	s	DIODE CL-196YG-CD-T
D3300	8-719-074-31	s	DIODE CL-196YG-CD-T
D3301	8-719-074-31	s	DIODE CL-196YG-CD-T
D3302	8-719-074-31	s	DIODE CL-196YG-CD-T
D3303	8-719-074-31	s	DIODE CL-196YG-CD-T
D4000	8-719-074-31	s	DIODE CL-196YG-CD-T
D4001	8-719-074-31	s	DIODE CL-196YG-CD-T
D4002	8-719-074-31	s	DIODE CL-196YG-CD-T
D4003	8-719-077-09	s	DIODE CL-196HR-CD-T
D4004	8-719-074-31	s	DIODE CL-196YG-CD-T
D4005	8-719-074-31	s	DIODE CL-196YG-CD-T
D4006	8-719-074-31	s	DIODE CL-196YG-CD-T
D4007	8-719-077-09	s	DIODE CL-196HR-CD-T
E100	1-535-877-22	s	CHIP, CHECKER
E101	1-535-877-22	s	CHIP, CHECKER
E102	1-535-877-22	s	CHIP, CHECKER
E103	1-535-877-22	s	CHIP, CHECKER
E200	1-535-877-22	s	CHIP, CHECKER
E201	1-535-877-22	s	CHIP, CHECKER
E202	1-535-877-22	s	CHIP, CHECKER
E300	1-535-877-22	s	CHIP, CHECKER
E301	1-535-877-22	s	CHIP, CHECKER
E400	1-535-877-22	s	CHIP, CHECKER
E401	1-535-877-22	s	CHIP, CHECKER
E402	1-535-877-22	s	CHIP, CHECKER
E600	1-535-877-22	s	CHIP, CHECKER
E800	1-535-877-22	s	CHIP, CHECKER
E900	1-535-877-22	s	CHIP, CHECKER
E901	1-535-877-22	s	CHIP, CHECKER
E1000	1-535-877-22	s	CHIP, CHECKER
E1400	1-535-877-22	s	CHIP, CHECKER
E1800	1-535-877-22	s	CHIP, CHECKER
E2800	1-535-877-22	s	CHIP, CHECKER
E2801	1-535-877-22	s	CHIP, CHECKER
E2900	1-535-877-22	s	CHIP, CHECKER
F100	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F101	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
F102	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F103	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
FB100	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB200	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2200	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2201	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2600	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2601	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2602	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FL900	1-234-844-11	s	FILTER, BAND PASS
FL901	1-200-047-11	s	FILTER, BAND PASS
FL902	1-200-046-11	s	FILTER, BAND PASS
FL903	1-234-845-11	s	FILTER, BAND PASS
FL904	1-234-849-11	s	FILTER, BAND PASS
FL905	1-234-848-11	s	FILTER, BAND PASS
FL906	1-200-049-11	s	FILTER, BAND PASS
FL907	1-200-048-11	s	FILTER, BAND PASS
IC100	8-759-679-57	s	IC SN74LVC00APWR
IC101	8-759-573-97	s	IC SN74LVC541APWR
IC102	8-759-573-97	s	IC SN74LVC541APWR
IC103	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC104	8-759-573-97	s	IC SN74LVC541APWR
IC105	8-759-392-77	s	IC SN74LVC245APWR
IC106	8-759-573-97	s	IC SN74LVC541APWR
IC107	6-708-538-01	s	IC CDCVF2510APWR
IC108	8-759-392-77	s	IC SN74LVC245APWR
IC109	8-759-573-97	s	IC SN74LVC541APWR
IC110	8-759-392-77	s	IC SN74LVC245APWR
IC111	8-759-392-77	s	IC SN74LVC245APWR
IC113	8-759-392-77	s	IC SN74LVC245APWR
IC114	6-701-572-01	s	IC TPS54610PWPR
IC115	6-701-572-01	s	IC TPS54610PWPR
IC200	6-700-764-01	s	IC DS90CR288AMTDX
IC203	8-759-573-97	s	IC SN74LVC541APWR
IC204	8-759-573-97	s	IC SN74LVC541APWR
IC207	6-708-538-01	s	IC CDCVF2510APWR
IC209	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC400	8-759-183-53	s	IC TL431CPK-E2
IC401	8-759-337-40	s	IC NJM2904V(TE2)
IC403	8-759-675-47	s	IC SN74LVC04APWR
IC404	8-759-669-43	s	IC SN74LVC157APWR-12
IC405	8-759-669-41	s	IC SN74LVC125APWR-12
IC406	8-759-669-43	s	IC SN74LVC157APWR-12
IC407	8-759-573-97	s	IC SN74LVC541APWR
IC409	6-710-605-01	s	IC MAX1617AMEE+TG069
IC411	6-710-605-01	s	IC MAX1617AMEE+TG069
IC800	8-759-564-49	s	IC TC7W53FU(TE12R)
IC801	6-707-877-01	s	IC TC74VHC32FT(EKJ)
IC802	8-752-093-54	s	IC CXA3513R
IC803	8-759-685-34	s	IC M62352AGP-D60Q
IC804	8-752-093-54	s	IC CXA3513R
IC805	8-759-460-74	s	IC BA05FP-E2
IC806	8-759-539-89	s	IC LM2990SX-5.0
IC807	6-707-877-01	s	IC TC74VHC32FT(EKJ)
IC808	8-752-093-54	s	IC CXA3513R

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC900	8-759-564-49	s	IC TC7W53FU(TE12R)
IC901	8-759-669-66	s	IC TLC272CPWR-12
IC902	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC903	8-759-648-70	s	IC SN74LVC07APWR
IC904	8-752-075-38	s	IC CXA3053R
IC905	8-759-564-49	s	IC TC7W53FU(TE12R)
IC906	8-759-564-49	s	IC TC7W53FU(TE12R)
IC907	8-759-669-66	s	IC TLC272CPWR-12
IC908	8-752-075-38	s	IC CXA3053R
IC909	8-759-144-71	s	IC UPC311G2-E2
IC910	8-759-564-49	s	IC TC7W53FU(TE12R)
IC911	8-759-564-49	s	IC TC7W53FU(TE12R)
IC912	8-759-564-49	s	IC TC7W53FU(TE12R)
IC1003	8-759-337-40	s	IC NJM2904V(TE2)
IC1004	8-759-460-74	s	IC BA05FP-E2
IC1403	8-759-460-74	s	IC BA05FP-E2
IC1803	8-759-460-74	s	IC BA05FP-E2
IC2200	6-700-763-01	s	IC DS90CR287MTDX
IC2400	8-759-679-53	s	IC SN74LVC244APWR
IC2401	8-759-337-40	s	IC NJM2904V(TE2)
IC2404	6-701-990-01	s	IC SN74LVC257APWR
IC2405	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2601	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2604	8-759-573-97	s	IC SN74LVC541APWR
IC2605	8-759-573-97	s	IC SN74LVC541APWR
IC2606	6-700-763-01	s	IC DS90CR287MTDX
IC2607	8-759-573-97	s	IC SN74LVC541APWR
IC2608	8-759-573-97	s	IC SN74LVC541APWR
IC2900	8-759-679-53	s	IC SN74LVC244APWR
IC2901	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2903	8-759-337-40	s	IC NJM2904V(TE2)
IC2904	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC2905	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2906	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2907	6-710-021-01	s	IC CAT24C16WI-GT3
IC2908	6-710-021-01	s	IC CAT24C16WI-GT3
IC2909	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2910	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2911	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2914	8-759-664-03	s	IC LP3964EMPX-ADJ
IC2915	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC2916	8-759-523-00	s	IC TC74HC4051AFT(EL)
IC2917	8-759-523-00	s	IC TC74HC4051AFT(EL)
IC2918	8-759-337-40	s	IC NJM2904V(TE2)
IC2919	8-759-337-40	s	IC NJM2904V(TE2)
IC2920	8-759-337-40	s	IC NJM2904V(TE2)
IC2921	8-759-337-40	s	IC NJM2904V(TE2)
IC2922	8-759-337-40	s	IC NJM2904V(TE2)
IC2925	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2926	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2927	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2928	8-759-564-49	s	IC TC7W53FU(TE12R)
L100	1-416-344-21	s	COIL, CHOKE 10UH
L101	1-469-529-21	s	INDUCTOR, (SMD) 10UH
L102	1-469-529-21	s	INDUCTOR, (SMD) 10UH
L103	1-416-344-21	s	COIL, CHOKE 10UH
L104	1-469-060-21	s	INDUCTOR
L105	1-469-060-21	s	INDUCTOR

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L600	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L601	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L602	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L603	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L604	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L605	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L606	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2200	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2201	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2202	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2203	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2204	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2205	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2206	*a 1-414-754-91	s	INDUCTOR, 10UH
	*b 1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q400	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q401	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q402	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q900	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q901	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q902	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q903	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q904	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q905	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q906	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q907	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q908	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q909	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q910	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q911	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q912	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q913	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q914	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q915	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q2900	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2901	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2902	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2903	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2904	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R101	1-208-935-81	s	RES, CHIP 100K (1005)
R102	1-208-935-81	s	RES, CHIP 100K (1005)
R104	1-208-935-81	s	RES, CHIP 100K (1005)
R105	1-208-863-81	s	RES, CHIP 100 (1005)
R106	1-208-863-81	s	RES, CHIP 100 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R109	1-208-855-81	s	RES, CHIP 47 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R111	1-208-911-81	s	RES, CHIP 10K (1005)
R112	1-220-870-81	s	RES, CHIP 10 (1005)
R113	1-208-887-81	s	RES, CHIP 1.0K (1005)
R114	1-208-887-81	s	RES, CHIP 1.0K (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-220-870-81	s	RES, CHIP 10 (1005)
R119	1-220-870-81	s	RES, CHIP 10 (1005)
R120	1-220-870-81	s	RES, CHIP 10 (1005)
R121	1-220-870-81	s	RES, CHIP 10 (1005)
R122	1-220-870-81	s	RES, CHIP 10 (1005)
R123	1-220-870-81	s	RES, CHIP 10 (1005)
R124	1-220-870-81	s	RES, CHIP 10 (1005)
R125	1-220-870-81	s	RES, CHIP 10 (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-208-891-81	s	RES, CHIP 1.5K (1005)
R134	1-208-867-81	s	RES, CHIP 150 (1005)
R135	1-208-867-81	s	RES, CHIP 150 (1005)
R136	1-208-891-81	s	RES, CHIP 1.5K (1005)
R138	1-208-867-81	s	RES, CHIP 150 (1005)
R139	1-208-867-81	s	RES, CHIP 150 (1005)
R140	1-208-867-81	s	RES, CHIP 150 (1005)
R141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-208-867-81	s	RES, CHIP 150 (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-911-81	s	RES, CHIP 10K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-910-81	s	RES, CHIP 9.1K (1005)
R148	1-208-903-81	s	RES, CHIP 4.7K (1005)
R150	1-208-883-81	s	RES, CHIP 680 (1005)
R152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R154	1-208-911-81	s	RES, CHIP 10K (1005)
R200	1-208-863-81	s	RES, CHIP 100 (1005)
R201	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-863-81	s	RES, CHIP 100 (1005)
R204	1-208-863-81	s	RES, CHIP 100 (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-220-878-81	s	RES, CHIP 22 (1005)
R209	1-220-878-81	s	RES, CHIP 22 (1005)
R210	1-220-878-81	s	RES, CHIP 22 (1005)
R211	1-220-878-81	s	RES, CHIP 22 (1005)
R212	1-220-878-81	s	RES, CHIP 22 (1005)
R213	1-220-878-81	s	RES, CHIP 22 (1005)
R214	1-220-878-81	s	RES, CHIP 22 (1005)
R215	1-220-878-81	s	RES, CHIP 22 (1005)
R216	1-220-878-81	s	RES, CHIP 22 (1005)
R217	1-220-878-81	s	RES, CHIP 22 (1005)
R218	1-220-878-81	s	RES, CHIP 22 (1005)
R219	1-220-878-81	s	RES, CHIP 22 (1005)
R220	1-220-878-81	s	RES, CHIP 22 (1005)
R221	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R222	1-220-878-81	s	RES, CHIP 22 (1005)
R223	1-220-878-81	s	RES, CHIP 22 (1005)
R224	1-220-878-81	s	RES, CHIP 22 (1005)
R225	1-220-878-81	s	RES, CHIP 22 (1005)
R226	1-220-878-81	s	RES, CHIP 22 (1005)
R227	1-220-878-81	s	RES, CHIP 22 (1005)
R228	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R244	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R250	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-220-870-81	s	RES, CHIP 10 (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R257	1-220-878-81	s	RES, CHIP 22 (1005)
R258	1-220-878-81	s	RES, CHIP 22 (1005)
R259	1-220-878-81	s	RES, CHIP 22 (1005)
R260	1-220-878-81	s	RES, CHIP 22 (1005)
R261	1-220-878-81	s	RES, CHIP 22 (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R263	1-220-878-81	s	RES, CHIP 22 (1005)
R264	1-220-878-81	s	RES, CHIP 22 (1005)
R265	1-220-878-81	s	RES, CHIP 22 (1005)
R266	1-220-878-81	s	RES, CHIP 22 (1005)
R267	1-220-878-81	s	RES, CHIP 22 (1005)
R269	1-208-911-81	s	RES, CHIP 10K (1005)
R270	1-208-911-81	s	RES, CHIP 10K (1005)
R272	1-208-911-81	s	RES, CHIP 10K (1005)
R280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R281	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R283	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R291	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R292	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R296	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R297	1-208-887-81	s	RES, CHIP 1.0K (1005)
R298	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R308	1-220-878-81	s	RES, CHIP 22 (1005)
R309	1-220-878-81	s	RES, CHIP 22 (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-220-878-81	s	RES, CHIP 22 (1005)
R312	1-220-878-81	s	RES, CHIP 22 (1005)
R313	1-220-878-81	s	RES, CHIP 22 (1005)
R314	1-220-878-81	s	RES, CHIP 22 (1005)
R315	1-220-878-81	s	RES, CHIP 22 (1005)
R316	1-220-878-81	s	RES, CHIP 22 (1005)
R317	1-220-878-81	s	RES, CHIP 22 (1005)
R318	1-220-878-81	s	RES, CHIP 22 (1005)
R319	1-220-878-81	s	RES, CHIP 22 (1005)
R320	1-220-878-81	s	RES, CHIP 22 (1005)
R321	1-220-878-81	s	RES, CHIP 22 (1005)
R322	1-220-878-81	s	RES, CHIP 22 (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R400	1-208-871-81	s	RES, CHIP 220 (1005)
R401	1-208-871-81	s	RES, CHIP 220 (1005)
R402	1-208-875-81	s	RES, CHIP 330 (1005)
R403	1-208-879-81	s	RES, CHIP 470 (1005)
R404	1-208-879-81	s	RES, CHIP 470 (1005)
R405	1-208-879-81	s	RES, CHIP 470 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-220-870-81	s	RES, CHIP 10 (1005)
R409	1-220-870-81	s	RES, CHIP 10 (1005)
R410	1-220-870-81	s	RES, CHIP 10 (1005)
R411	1-220-870-81	s	RES, CHIP 10 (1005)
R412	1-208-879-81	s	RES, CHIP 470 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-208-911-81	s	RES, CHIP 10K (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-220-870-81	s	RES, CHIP 10 (1005)
R423	1-220-870-81	s	RES, CHIP 10 (1005)
R425	1-220-870-81	s	RES, CHIP 10 (1005)
R426	1-220-870-81	s	RES, CHIP 10 (1005)
R427	1-220-870-81	s	RES, CHIP 10 (1005)
R428	1-220-870-81	s	RES, CHIP 10 (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-911-81	s	RES, CHIP 10K (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-220-870-81	s	RES, CHIP 10 (1005)
R435	1-220-870-81	s	RES, CHIP 10 (1005)
R436	1-220-870-81	s	RES, CHIP 10 (1005)
R437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R439	1-208-887-81	s	RES, CHIP 1.0K (1005)
R440	1-220-870-81	s	RES, CHIP 10 (1005)
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-220-870-81	s	RES, CHIP 10 (1005)
R446	1-220-870-81	s	RES, CHIP 10 (1005)
R447	1-220-870-81	s	RES, CHIP 10 (1005)
R448	1-220-870-81	s	RES, CHIP 10 (1005)
R449	1-220-870-81	s	RES, CHIP 10 (1005)
R450	1-220-870-81	s	RES, CHIP 10 (1005)
R451	1-220-870-81	s	RES, CHIP 10 (1005)
R452	1-220-870-81	s	RES, CHIP 10 (1005)
R453	1-220-870-81	s	RES, CHIP 10 (1005)
R454	1-220-870-81	s	RES, CHIP 10 (1005)
R455	1-220-870-81	s	RES, CHIP 10 (1005)
R456	1-220-870-81	s	RES, CHIP 10 (1005)
R457	1-220-870-81	s	RES, CHIP 10 (1005)
R458	1-220-870-81	s	RES, CHIP 10 (1005)
R459	1-220-870-81	s	RES, CHIP 10 (1005)
R460	1-220-870-81	s	RES, CHIP 10 (1005)
R461	1-220-870-81	s	RES, CHIP 10 (1005)
R462	1-220-870-81	s	RES, CHIP 10 (1005)
R463	1-220-870-81	s	RES, CHIP 10 (1005)
R464	1-220-870-81	s	RES, CHIP 10 (1005)
R465	1-220-870-81	s	RES, CHIP 10 (1005)
R466	1-220-870-81	s	RES, CHIP 10 (1005)
R467	1-220-870-81	s	RES, CHIP 10 (1005)
R468	1-220-870-81	s	RES, CHIP 10 (1005)
R469	1-220-870-81	s	RES, CHIP 10 (1005)
R470	1-220-870-81	s	RES, CHIP 10 (1005)
R471	1-220-870-81	s	RES, CHIP 10 (1005)
R472	1-220-870-81	s	RES, CHIP 10 (1005)
R473	1-220-870-81	s	RES, CHIP 10 (1005)
R474	1-220-870-81	s	RES, CHIP 10 (1005)
R475	1-220-870-81	s	RES, CHIP 10 (1005)
R476	1-220-870-81	s	RES, CHIP 10 (1005)
R477	1-220-870-81	s	RES, CHIP 10 (1005)
R478	1-220-870-81	s	RES, CHIP 10 (1005)
R479	1-208-911-81	s	RES, CHIP 10K (1005)
R480	1-208-911-81	s	RES, CHIP 10K (1005)
R481	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R482	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R483	1-220-870-81	s	RES, CHIP 10 (1005)
R484	1-220-870-81	s	RES, CHIP 10 (1005)
R485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R486	1-220-870-81	s	RES, CHIP 10 (1005)
R487	1-220-870-81	s	RES, CHIP 10 (1005)
R488	1-220-870-81	s	RES, CHIP 10 (1005)
R489	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R490	1-220-870-81	s	RES, CHIP 10 (1005)
R491	1-220-870-81	s	RES, CHIP 10 (1005)
R492	1-220-870-81	s	RES, CHIP 10 (1005)
R493	1-208-863-81	s	RES, CHIP 100 (1005)
R494	1-208-855-81	s	RES, CHIP 47 (1005)
R495	1-208-855-81	s	RES, CHIP 47 (1005)
R496	1-220-870-81	s	RES, CHIP 10 (1005)
R497	1-220-870-81	s	RES, CHIP 10 (1005)
R498	1-208-855-81	s	RES, CHIP 47 (1005)
R499	1-220-870-81	s	RES, CHIP 10 (1005)
R500	1-220-870-81	s	RES, CHIP 10 (1005)
R501	1-220-870-81	s	RES, CHIP 10 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R503	1-220-870-81	s	RES, CHIP 10 (1005)
R504	1-220-870-81	s	RES, CHIP 10 (1005)
R505	1-220-870-81	s	RES, CHIP 10 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-220-870-81	s	RES, CHIP 10 (1005)
R509	1-220-870-81	s	RES, CHIP 10 (1005)
R510	1-208-855-81	s	RES, CHIP 47 (1005)
R511	1-208-855-81	s	RES, CHIP 47 (1005)
R512	1-220-870-81	s	RES, CHIP 10 (1005)
R513	1-220-870-81	s	RES, CHIP 10 (1005)
R514	1-208-855-81	s	RES, CHIP 47 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-220-870-81	s	RES, CHIP 10 (1005)
R517	1-220-870-81	s	RES, CHIP 10 (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-911-81	s	RES, CHIP 10K (1005)
R520	1-208-911-81	s	RES, CHIP 10K (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R522	1-208-911-81	s	RES, CHIP 10K (1005)
R523	1-208-871-81	s	RES, CHIP 220 (1005)
R524	1-220-870-81	s	RES, CHIP 10 (1005)
R525	1-220-870-81	s	RES, CHIP 10 (1005)
R526	1-220-870-81	s	RES, CHIP 10 (1005)
R527	1-220-870-81	s	RES, CHIP 10 (1005)
R528	1-220-870-81	s	RES, CHIP 10 (1005)
R529	1-220-870-81	s	RES, CHIP 10 (1005)
R530	1-208-863-81	s	RES, CHIP 100 (1005)
R531	1-220-870-81	s	RES, CHIP 10 (1005)
R532	1-220-870-81	s	RES, CHIP 10 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-220-870-81	s	RES, CHIP 10 (1005)
R535	1-220-870-81	s	RES, CHIP 10 (1005)
R536	1-220-870-81	s	RES, CHIP 10 (1005)
R537	1-220-870-81	s	RES, CHIP 10 (1005)
R538	1-220-870-81	s	RES, CHIP 10 (1005)
R539	1-220-870-81	s	RES, CHIP 10 (1005)
R540	1-220-870-81	s	RES, CHIP 10 (1005)
R541	1-220-870-81	s	RES, CHIP 10 (1005)
R542	1-220-870-81	s	RES, CHIP 10 (1005)
R543	1-220-870-81	s	RES, CHIP 10 (1005)
R544	1-220-870-81	s	RES, CHIP 10 (1005)
R545	1-220-870-81	s	RES, CHIP 10 (1005)
R546	1-220-870-81	s	RES, CHIP 10 (1005)
R547	1-220-870-81	s	RES, CHIP 10 (1005)
R548	1-220-870-81	s	RES, CHIP 10 (1005)
R549	1-220-870-81	s	RES, CHIP 10 (1005)
R550	1-220-870-81	s	RES, CHIP 10 (1005)
R551	1-220-870-81	s	RES, CHIP 10 (1005)
R552	1-220-870-81	s	RES, CHIP 10 (1005)
R553	1-208-871-81	s	RES, CHIP 220 (1005)
R554	1-208-887-81	s	RES, CHIP 1.0K (1005)
R555	1-220-870-81	s	RES, CHIP 10 (1005)
R556	1-220-870-81	s	RES, CHIP 10 (1005)
R557	1-220-870-81	s	RES, CHIP 10 (1005)
R558	1-220-870-81	s	RES, CHIP 10 (1005)
R559	1-220-870-81	s	RES, CHIP 10 (1005)
R560	1-220-870-81	s	RES, CHIP 10 (1005)
R561	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R562	1-220-870-81	s	RES, CHIP 10 (1005)
R563	1-220-870-81	s	RES, CHIP 10 (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-208-911-81	s	RES, CHIP 10K (1005)
R566	1-208-911-81	s	RES, CHIP 10K (1005)
R567	1-208-911-81	s	RES, CHIP 10K (1005)
R568	1-208-911-81	s	RES, CHIP 10K (1005)
R569	1-208-911-81	s	RES, CHIP 10K (1005)
R570	1-208-911-81	s	RES, CHIP 10K (1005)
R571	1-208-911-81	s	RES, CHIP 10K (1005)
R572	1-208-911-81	s	RES, CHIP 10K (1005)
R575	1-220-870-81	s	RES, CHIP 10 (1005)
R576	1-220-870-81	s	RES, CHIP 10 (1005)
R577	1-220-870-81	s	RES, CHIP 10 (1005)
R580	1-220-870-81	s	RES, CHIP 10 (1005)
R581	1-208-911-81	s	RES, CHIP 10K (1005)
R600	1-208-911-81	s	RES, CHIP 10K (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R605	1-208-911-81	s	RES, CHIP 10K (1005)
R606	1-208-911-81	s	RES, CHIP 10K (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-911-81	s	RES, CHIP 10K (1005)
R612	1-208-887-81	s	RES, CHIP 1.0K (1005)
R613	1-208-887-81	s	RES, CHIP 1.0K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R616	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R618	1-208-887-81	s	RES, CHIP 1.0K (1005)
R619	1-208-887-81	s	RES, CHIP 1.0K (1005)
R620	1-208-887-81	s	RES, CHIP 1.0K (1005)
R621	1-208-887-81	s	RES, CHIP 1.0K (1005)
R622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R624	1-208-887-81	s	RES, CHIP 1.0K (1005)
R625	1-208-887-81	s	RES, CHIP 1.0K (1005)
R626	1-208-887-81	s	RES, CHIP 1.0K (1005)
R627	1-208-887-81	s	RES, CHIP 1.0K (1005)
R628	1-208-887-81	s	RES, CHIP 1.0K (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R630	1-208-863-81	s	RES, CHIP 100 (1005)
R631	1-208-887-81	s	RES, CHIP 1.0K (1005)
R632	1-208-887-81	s	RES, CHIP 1.0K (1005)
R633	1-208-887-81	s	RES, CHIP 1.0K (1005)
R634	1-208-863-81	s	RES, CHIP 100 (1005)
R635	1-208-863-81	s	RES, CHIP 100 (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R637	1-208-863-81	s	RES, CHIP 100 (1005)
R638	1-220-882-81	s	RES, CHIP 33 (1005)
R639	1-220-882-81	s	RES, CHIP 33 (1005)
R640	1-208-863-81	s	RES, CHIP 100 (1005)
R641	1-208-863-81	s	RES, CHIP 100 (1005)
R642	1-208-863-81	s	RES, CHIP 100 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R643	1-208-863-81	s	RES, CHIP 100 (1005)
R644	1-208-863-81	s	RES, CHIP 100 (1005)
R645	1-208-863-81	s	RES, CHIP 100 (1005)
R646	1-208-863-81	s	RES, CHIP 100 (1005)
R647	1-208-863-81	s	RES, CHIP 100 (1005)
R648	1-208-863-81	s	RES, CHIP 100 (1005)
R649	1-208-863-81	s	RES, CHIP 100 (1005)
R650	1-208-863-81	s	RES, CHIP 100 (1005)
R651	1-208-863-81	s	RES, CHIP 100 (1005)
R652	1-208-863-81	s	RES, CHIP 100 (1005)
R653	1-208-863-81	s	RES, CHIP 100 (1005)
R654	1-208-863-81	s	RES, CHIP 100 (1005)
R655	1-208-863-81	s	RES, CHIP 100 (1005)
R656	1-208-863-81	s	RES, CHIP 100 (1005)
R657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R658	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R659	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R660	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R663	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R666	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R669	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R670	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R672	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R673	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R674	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R675	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R676	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R677	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R678	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R679	1-220-870-81	s	RES, CHIP 10 (1005)
R680	1-220-870-81	s	RES, CHIP 10 (1005)
R681	1-220-870-81	s	RES, CHIP 10 (1005)
R682	1-220-870-81	s	RES, CHIP 10 (1005)
R683	1-220-870-81	s	RES, CHIP 10 (1005)
R684	1-220-870-81	s	RES, CHIP 10 (1005)
R685	1-220-870-81	s	RES, CHIP 10 (1005)
R686	1-220-870-81	s	RES, CHIP 10 (1005)
R687	1-220-870-81	s	RES, CHIP 10 (1005)
R688	1-220-870-81	s	RES, CHIP 10 (1005)
R689	1-220-870-81	s	RES, CHIP 10 (1005)
R690	1-220-870-81	s	RES, CHIP 10 (1005)
R691	1-220-870-81	s	RES, CHIP 10 (1005)
R692	1-220-870-81	s	RES, CHIP 10 (1005)
R693	1-220-870-81	s	RES, CHIP 10 (1005)
R694	1-220-870-81	s	RES, CHIP 10 (1005)
R695	1-220-870-81	s	RES, CHIP 10 (1005)
R696	1-220-870-81	s	RES, CHIP 10 (1005)
R697	1-220-870-81	s	RES, CHIP 10 (1005)
R698	1-220-870-81	s	RES, CHIP 10 (1005)
R699	1-220-870-81	s	RES, CHIP 10 (1005)
R700	1-220-870-81	s	RES, CHIP 10 (1005)
R701	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R702	1-220-870-81	s	RES, CHIP 10 (1005)
R703	1-220-870-81	s	RES, CHIP 10 (1005)
R704	1-220-870-81	s	RES, CHIP 10 (1005)
R705	1-220-870-81	s	RES, CHIP 10 (1005)
R706	1-220-870-81	s	RES, CHIP 10 (1005)
R707	1-220-870-81	s	RES, CHIP 10 (1005)
R708	1-220-878-81	s	RES, CHIP 22 (1005)
R709	1-220-870-81	s	RES, CHIP 10 (1005)
R710	1-220-878-81	s	RES, CHIP 22 (1005)
R711	1-220-870-81	s	RES, CHIP 10 (1005)
R712	1-220-870-81	s	RES, CHIP 10 (1005)
R713	1-220-870-81	s	RES, CHIP 10 (1005)
R714	1-220-870-81	s	RES, CHIP 10 (1005)
R715	1-220-870-81	s	RES, CHIP 10 (1005)
R716	1-208-911-81	s	RES, CHIP 10K (1005)
R800	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-208-911-81	s	RES, CHIP 10K (1005)
R802	1-208-911-81	s	RES, CHIP 10K (1005)
R803	1-208-911-81	s	RES, CHIP 10K (1005)
R804	1-208-911-81	s	RES, CHIP 10K (1005)
R805	1-208-911-81	s	RES, CHIP 10K (1005)
R811	1-208-880-81	s	RES, CHIP 510 (1005)
R812	1-208-880-81	s	RES, CHIP 510 (1005)
R813	1-208-880-81	s	RES, CHIP 510 (1005)
R814	1-208-880-81	s	RES, CHIP 510 (1005)
R815	1-208-864-81	s	RES, CHIP 110 (1005)
R816	1-208-864-81	s	RES, CHIP 110 (1005)
R817	1-208-864-81	s	RES, CHIP 110 (1005)
R818	1-208-864-81	s	RES, CHIP 110 (1005)
R819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R821	1-208-865-81	s	RES, CHIP 120 (1005)
R822	1-208-887-81	s	RES, CHIP 1.0K (1005)
R823	1-208-887-81	s	RES, CHIP 1.0K (1005)
R824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R834	1-208-863-81	s	RES, CHIP 100 (1005)
R835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R839	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R841	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R842	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R845	1-208-887-81	s	RES, CHIP 1.0K (1005)
R846	1-208-887-81	s	RES, CHIP 1.0K (1005)
R848	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R849	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R850	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R851	1-208-887-81	s	RES, CHIP 1.0K (1005)
R852	1-208-887-81	s	RES, CHIP 1.0K (1005)
R853	1-208-887-81	s	RES, CHIP 1.0K (1005)
R854	1-208-887-81	s	RES, CHIP 1.0K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R855	1-208-903-81	s	RES, CHIP 4.7K (1005)
R856	1-208-903-81	s	RES, CHIP 4.7K (1005)
R857	1-208-903-81	s	RES, CHIP 4.7K (1005)
R858	1-208-903-81	s	RES, CHIP 4.7K (1005)
R859	1-208-903-81	s	RES, CHIP 4.7K (1005)
R860	1-208-903-81	s	RES, CHIP 4.7K (1005)
R861	1-208-887-81	s	RES, CHIP 1.0K (1005)
R862	1-208-887-81	s	RES, CHIP 1.0K (1005)
R863	1-208-887-81	s	RES, CHIP 1.0K (1005)
R864	1-208-911-81	s	RES, CHIP 10K (1005)
R865	1-208-911-81	s	RES, CHIP 10K (1005)
R866	1-208-911-81	s	RES, CHIP 10K (1005)
R870	1-208-880-81	s	RES, CHIP 510 (1005)
R871	1-208-880-81	s	RES, CHIP 510 (1005)
R872	1-208-864-81	s	RES, CHIP 110 (1005)
R873	1-208-864-81	s	RES, CHIP 110 (1005)
R874	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R875	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R878	1-208-865-81	s	RES, CHIP 120 (1005)
R879	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R880	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R883	1-208-887-81	s	RES, CHIP 1.0K (1005)
R884	1-208-887-81	s	RES, CHIP 1.0K (1005)
R885	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R890	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R891	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R892	1-208-863-81	s	RES, CHIP 100 (1005)
R893	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R894	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R896	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R897	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R900	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-911-81	s	RES, CHIP 10K (1005)
R903	1-208-903-81	s	RES, CHIP 4.7K (1005)
R904	1-208-920-81	s	RES, CHIP 24K (1005)
R905	1-208-911-81	s	RES, CHIP 10K (1005)
R906	1-208-918-81	s	RES, CHIP 20K (1005)
R907	1-208-887-81	s	RES, CHIP 1.0K (1005)
R908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R909	1-208-894-81	s	RES, CHIP 2.0K (1005)
R910	1-208-863-81	s	RES, CHIP 100 (1005)
R911	1-208-863-81	s	RES, CHIP 100 (1005)
R912	1-208-863-81	s	RES, CHIP 100 (1005)
R913	1-208-863-81	s	RES, CHIP 100 (1005)
R914	1-208-919-81	s	RES, CHIP 22K (1005)
R915	1-208-887-81	s	RES, CHIP 1.0K (1005)
R916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R917	1-208-887-81	s	RES, CHIP 1.0K (1005)
R918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R919	1-208-887-81	s	RES, CHIP 1.0K (1005)
R920	1-208-887-81	s	RES, CHIP 1.0K (1005)
R921	1-208-887-81	s	RES, CHIP 1.0K (1005)
R922	1-208-887-81	s	RES, CHIP 1.0K (1005)
R923	1-208-894-81	s	RES, CHIP 2.0K (1005)
R924	1-208-894-81	s	RES, CHIP 2.0K (1005)
R925	1-208-894-81	s	RES, CHIP 2.0K (1005)
R926	1-208-894-81	s	RES, CHIP 2.0K (1005)
R927	1-208-894-81	s	RES, CHIP 2.0K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R928	1-208-894-81	s	RES, CHIP 2.0K (1005)
R929	1-208-894-81	s	RES, CHIP 2.0K (1005)
R930	1-208-894-81	s	RES, CHIP 2.0K (1005)
R931	1-208-894-81	s	RES, CHIP 2.0K (1005)
R932	1-208-863-81	s	RES, CHIP 100 (1005)
R933	1-208-863-81	s	RES, CHIP 100 (1005)
R934	1-208-863-81	s	RES, CHIP 100 (1005)
R935	1-208-894-81	s	RES, CHIP 2.0K (1005)
R936	1-208-894-81	s	RES, CHIP 2.0K (1005)
R937	1-208-863-81	s	RES, CHIP 100 (1005)
R938	1-208-863-81	s	RES, CHIP 100 (1005)
R939	1-208-887-81	s	RES, CHIP 1.0K (1005)
R940	1-208-887-81	s	RES, CHIP 1.0K (1005)
R941	1-208-887-81	s	RES, CHIP 1.0K (1005)
R942	1-208-863-81	s	RES, CHIP 100 (1005)
R943	1-208-887-81	s	RES, CHIP 1.0K (1005)
R944	1-208-863-81	s	RES, CHIP 100 (1005)
R945	1-208-935-81	s	RES, CHIP 100K (1005)
R946	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R947	1-208-911-81	s	RES, CHIP 10K (1005)
R948	1-208-911-81	s	RES, CHIP 10K (1005)
R949	1-208-911-81	s	RES, CHIP 10K (1005)
R950	1-208-935-81	s	RES, CHIP 100K (1005)
R951	1-208-920-81	s	RES, CHIP 24K (1005)
R952	1-208-911-81	s	RES, CHIP 10K (1005)
R953	1-208-918-81	s	RES, CHIP 20K (1005)
R954	1-208-887-81	s	RES, CHIP 1.0K (1005)
R955	1-208-887-81	s	RES, CHIP 1.0K (1005)
R956	1-208-863-81	s	RES, CHIP 100 (1005)
R957	1-208-863-81	s	RES, CHIP 100 (1005)
R958	1-208-863-81	s	RES, CHIP 100 (1005)
R959	1-208-863-81	s	RES, CHIP 100 (1005)
R960	1-208-894-81	s	RES, CHIP 2.0K (1005)
R961	1-208-887-81	s	RES, CHIP 1.0K (1005)
R962	1-208-887-81	s	RES, CHIP 1.0K (1005)
R963	1-208-887-81	s	RES, CHIP 1.0K (1005)
R964	1-208-887-81	s	RES, CHIP 1.0K (1005)
R965	1-208-887-81	s	RES, CHIP 1.0K (1005)
R966	1-208-887-81	s	RES, CHIP 1.0K (1005)
R967	1-208-887-81	s	RES, CHIP 1.0K (1005)
R968	1-208-887-81	s	RES, CHIP 1.0K (1005)
R969	1-208-919-81	s	RES, CHIP 22K (1005)
R970	1-208-894-81	s	RES, CHIP 2.0K (1005)
R971	1-208-894-81	s	RES, CHIP 2.0K (1005)
R972	1-208-894-81	s	RES, CHIP 2.0K (1005)
R973	1-208-894-81	s	RES, CHIP 2.0K (1005)
R974	1-208-894-81	s	RES, CHIP 2.0K (1005)
R975	1-208-894-81	s	RES, CHIP 2.0K (1005)
R976	1-208-894-81	s	RES, CHIP 2.0K (1005)
R977	1-208-894-81	s	RES, CHIP 2.0K (1005)
R978	1-208-894-81	s	RES, CHIP 2.0K (1005)
R979	1-208-894-81	s	RES, CHIP 2.0K (1005)
R980	1-208-894-81	s	RES, CHIP 2.0K (1005)
R981	1-208-863-81	s	RES, CHIP 100 (1005)
R982	1-208-863-81	s	RES, CHIP 100 (1005)
R983	1-208-863-81	s	RES, CHIP 100 (1005)
R984	1-208-863-81	s	RES, CHIP 100 (1005)
R985	1-208-887-81	s	RES, CHIP 1.0K (1005)
R986	1-208-887-81	s	RES, CHIP 1.0K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R987	1-208-887-81	s	RES, CHIP 1.0K (1005)
R988	1-208-887-81	s	RES, CHIP 1.0K (1005)
R989	1-208-863-81	s	RES, CHIP 100 (1005)
R990	1-208-863-81	s	RES, CHIP 100 (1005)
R991	1-208-911-81	s	RES, CHIP 10K (1005)
R992	1-208-935-81	s	RES, CHIP 100K (1005)
R993	1-208-897-81	s	RES, CHIP 2.7K (1005)
R994	1-208-911-81	s	RES, CHIP 10K (1005)
R995	1-208-911-81	s	RES, CHIP 10K (1005)
R996	1-208-899-81	s	RES, CHIP 3.3K (1005)
R997	1-208-863-81	s	RES, CHIP 100 (1005)
R998	1-208-863-81	s	RES, CHIP 100 (1005)
R1000	1-208-855-81	s	RES, CHIP 47 (1005)
R1001	1-208-855-81	s	RES, CHIP 47 (1005)
R1002	1-208-863-81	s	RES, CHIP 100 (1005)
R1003	1-208-918-81	s	RES, CHIP 20K (1005)
R1004	1-208-879-81	s	RES, CHIP 470 (1005)
R1005	1-208-879-81	s	RES, CHIP 470 (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-208-911-81	s	RES, CHIP 10K (1005)
R1011	1-208-911-81	s	RES, CHIP 10K (1005)
R1013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1016	1-208-922-81	s	RES, CHIP 30K (1005)
R1017	1-208-914-81	s	RES, CHIP 13K (1005)
R1018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1030	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1031	1-208-879-81	s	RES, CHIP 470 (1005)
R1032	1-208-911-81	s	RES, CHIP 10K (1005)
R1033	1-208-911-81	s	RES, CHIP 10K (1005)
R1034	1-208-911-81	s	RES, CHIP 10K (1005)
R1035	1-208-871-81	s	RES, CHIP 220 (1005)
R1036	1-208-871-81	s	RES, CHIP 220 (1005)
R1037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1039	1-208-863-81	s	RES, CHIP 100 (1005)
R1040	1-208-919-81	s	RES, CHIP 22K (1005)
R1041	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1042	1-208-855-81	s	RES, CHIP 47 (1005)
R1043	1-208-855-81	s	RES, CHIP 47 (1005)
R1044	1-208-863-81	s	RES, CHIP 100 (1005)
R1045	1-208-918-81	s	RES, CHIP 20K (1005)
R1046	1-208-879-81	s	RES, CHIP 470 (1005)
R1047	1-208-879-81	s	RES, CHIP 470 (1005)
R1048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1049	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1052	1-208-911-81	s	RES, CHIP 10K (1005)
R1053	1-208-911-81	s	RES, CHIP 10K (1005)
R1055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1058	1-208-922-81	s	RES, CHIP 30K (1005)
R1059	1-208-914-81	s	RES, CHIP 13K (1005)
R1060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1072	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1073	1-208-879-81	s	RES, CHIP 470 (1005)
R1074	1-208-911-81	s	RES, CHIP 10K (1005)
R1075	1-208-911-81	s	RES, CHIP 10K (1005)
R1076	1-208-911-81	s	RES, CHIP 10K (1005)
R1077	1-208-871-81	s	RES, CHIP 220 (1005)
R1078	1-208-871-81	s	RES, CHIP 220 (1005)
R1079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1081	1-208-863-81	s	RES, CHIP 100 (1005)
R1082	1-208-919-81	s	RES, CHIP 22K (1005)
R1083	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1084	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1085	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1086	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1087	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1088	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1089	1-220-878-81	s	RES, CHIP 22 (1005)
R1090	1-220-878-81	s	RES, CHIP 22 (1005)
R1091	1-220-878-81	s	RES, CHIP 22 (1005)
R1092	1-220-878-81	s	RES, CHIP 22 (1005)
R1093	1-220-878-81	s	RES, CHIP 22 (1005)
R1094	1-220-878-81	s	RES, CHIP 22 (1005)
R1095	1-220-878-81	s	RES, CHIP 22 (1005)
R1096	1-220-878-81	s	RES, CHIP 22 (1005)
R1097	1-220-878-81	s	RES, CHIP 22 (1005)
R1098	1-220-878-81	s	RES, CHIP 22 (1005)
R1099	1-220-878-81	s	RES, CHIP 22 (1005)
R1100	1-220-878-81	s	RES, CHIP 22 (1005)
R1101	1-220-878-81	s	RES, CHIP 22 (1005)
R1102	1-220-878-81	s	RES, CHIP 22 (1005)
R1103	1-220-878-81	s	RES, CHIP 22 (1005)
R1104	1-220-878-81	s	RES, CHIP 22 (1005)
R1105	1-220-878-81	s	RES, CHIP 22 (1005)
R1106	1-220-878-81	s	RES, CHIP 22 (1005)
R1107	1-220-878-81	s	RES, CHIP 22 (1005)
R1108	1-220-878-81	s	RES, CHIP 22 (1005)
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1202	1-208-863-81	s	RES, CHIP 100 (1005)
R1203	1-208-918-81	s	RES, CHIP 20K (1005)
R1204	1-208-879-81	s	RES, CHIP 470 (1005)
R1205	1-208-879-81	s	RES, CHIP 470 (1005)
R1206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1210	1-208-911-81	s	RES, CHIP 10K (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)
R1215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-208-922-81	s	RES, CHIP 30K (1005)
R1217	1-208-914-81	s	RES, CHIP 13K (1005)
R1218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1223	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1230	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1231	1-208-879-81	s	RES, CHIP 470 (1005)
R1232	1-208-911-81	s	RES, CHIP 10K (1005)
R1233	1-208-911-81	s	RES, CHIP 10K (1005)
R1234	1-208-911-81	s	RES, CHIP 10K (1005)
R1235	1-208-871-81	s	RES, CHIP 220 (1005)
R1236	1-208-871-81	s	RES, CHIP 220 (1005)
R1237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1239	1-208-863-81	s	RES, CHIP 100 (1005)
R1240	1-208-919-81	s	RES, CHIP 22K (1005)
R1241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1242	1-208-855-81	s	RES, CHIP 47 (1005)
R1243	1-208-855-81	s	RES, CHIP 47 (1005)
R1244	1-208-863-81	s	RES, CHIP 100 (1005)
R1245	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1246	1-208-918-81	s	RES, CHIP 20K (1005)
R1247	1-208-879-81	s	RES, CHIP 470 (1005)
R1248	1-208-879-81	s	RES, CHIP 470 (1005)
R1249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1250	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1253	1-208-911-81	s	RES, CHIP 10K (1005)
R1254	1-208-911-81	s	RES, CHIP 10K (1005)
R1256	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1257	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1259	1-208-922-81	s	RES, CHIP 30K (1005)
R1260	1-208-914-81	s	RES, CHIP 13K (1005)
R1261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1263	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1265	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1268	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1274	1-208-879-81	s	RES, CHIP 470 (1005)
R1275	1-208-911-81	s	RES, CHIP 10K (1005)
R1276	1-208-911-81	s	RES, CHIP 10K (1005)
R1277	1-208-911-81	s	RES, CHIP 10K (1005)
R1278	1-208-871-81	s	RES, CHIP 220 (1005)
R1279	1-208-871-81	s	RES, CHIP 220 (1005)
R1280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1281	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1282	1-208-863-81	s	RES, CHIP 100 (1005)
R1283	1-208-919-81	s	RES, CHIP 22K (1005)
R1284	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1287	1-208-875-81	s	RES, CHIP 330 (1005)
R1288	1-220-878-81	s	RES, CHIP 22 (1005)
R1289	1-220-878-81	s	RES, CHIP 22 (1005)
R1290	1-220-878-81	s	RES, CHIP 22 (1005)
R1291	1-220-878-81	s	RES, CHIP 22 (1005)
R1292	1-220-878-81	s	RES, CHIP 22 (1005)
R1293	1-220-878-81	s	RES, CHIP 22 (1005)
R1294	1-220-878-81	s	RES, CHIP 22 (1005)
R1295	1-220-878-81	s	RES, CHIP 22 (1005)
R1296	1-220-878-81	s	RES, CHIP 22 (1005)
R1297	1-220-878-81	s	RES, CHIP 22 (1005)
R1298	1-220-878-81	s	RES, CHIP 22 (1005)
R1299	1-220-878-81	s	RES, CHIP 22 (1005)
R1300	1-220-878-81	s	RES, CHIP 22 (1005)
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1302	1-220-878-81	s	RES, CHIP 22 (1005)
R1303	1-220-878-81	s	RES, CHIP 22 (1005)
R1400	1-208-855-81	s	RES, CHIP 47 (1005)
R1401	1-208-855-81	s	RES, CHIP 47 (1005)
R1402	1-208-863-81	s	RES, CHIP 100 (1005)
R1403	1-208-918-81	s	RES, CHIP 20K (1005)
R1404	1-208-879-81	s	RES, CHIP 470 (1005)
R1405	1-208-879-81	s	RES, CHIP 470 (1005)
R1406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1410	1-208-911-81	s	RES, CHIP 10K (1005)
R1411	1-208-911-81	s	RES, CHIP 10K (1005)
R1414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1416	1-208-922-81	s	RES, CHIP 30K (1005)
R1417	1-208-914-81	s	RES, CHIP 13K (1005)
R1418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1423	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1430	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1431	1-208-879-81	s	RES, CHIP 470 (1005)
R1432	1-208-911-81	s	RES, CHIP 10K (1005)
R1433	1-208-911-81	s	RES, CHIP 10K (1005)
R1434	1-208-911-81	s	RES, CHIP 10K (1005)
R1435	1-208-871-81	s	RES, CHIP 220 (1005)
R1436	1-208-871-81	s	RES, CHIP 220 (1005)
R1437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1439	1-208-863-81	s	RES, CHIP 100 (1005)
R1440	1-208-919-81	s	RES, CHIP 22K (1005)
R1441	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1442	1-208-855-81	s	RES, CHIP 47 (1005)
R1443	1-208-855-81	s	RES, CHIP 47 (1005)
R1444	1-208-863-81	s	RES, CHIP 100 (1005)
R1445	1-208-918-81	s	RES, CHIP 20K (1005)
R1446	1-208-879-81	s	RES, CHIP 470 (1005)
R1447	1-208-879-81	s	RES, CHIP 470 (1005)
R1448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1449	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1452	1-208-911-81	s	RES, CHIP 10K (1005)
R1453	1-208-911-81	s	RES, CHIP 10K (1005)
R1458	1-208-922-81	s	RES, CHIP 30K (1005)
R1459	1-208-914-81	s	RES, CHIP 13K (1005)
R1460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1466	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1469	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1471	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1472	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1473	1-208-879-81	s	RES, CHIP 470 (1005)
R1474	1-208-911-81	s	RES, CHIP 10K (1005)
R1475	1-208-911-81	s	RES, CHIP 10K (1005)
R1476	1-208-911-81	s	RES, CHIP 10K (1005)
R1477	1-208-871-81	s	RES, CHIP 220 (1005)
R1478	1-208-871-81	s	RES, CHIP 220 (1005)
R1479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1480	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1481	1-208-863-81	s	RES, CHIP 100 (1005)
R1482	1-208-919-81	s	RES, CHIP 22K (1005)
R1483	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1484	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1486	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1487	1-220-878-81	s	RES, CHIP 22 (1005)
R1488	1-220-878-81	s	RES, CHIP 22 (1005)
R1489	1-220-878-81	s	RES, CHIP 22 (1005)
R1490	1-220-878-81	s	RES, CHIP 22 (1005)
R1491	1-220-878-81	s	RES, CHIP 22 (1005)
R1492	1-220-878-81	s	RES, CHIP 22 (1005)
R1493	1-220-878-81	s	RES, CHIP 22 (1005)
R1494	1-220-878-81	s	RES, CHIP 22 (1005)
R1495	1-220-878-81	s	RES, CHIP 22 (1005)
R1496	1-220-878-81	s	RES, CHIP 22 (1005)
R1497	1-220-878-81	s	RES, CHIP 22 (1005)
R1498	1-220-878-81	s	RES, CHIP 22 (1005)
R1499	1-220-878-81	s	RES, CHIP 22 (1005)
R1500	1-220-878-81	s	RES, CHIP 22 (1005)
R1501	1-220-878-81	s	RES, CHIP 22 (1005)
R1502	1-220-878-81	s	RES, CHIP 22 (1005)
R1503	1-220-878-81	s	RES, CHIP 22 (1005)
R1504	1-220-878-81	s	RES, CHIP 22 (1005)
R1505	1-220-878-81	s	RES, CHIP 22 (1005)
R1506	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1600	1-208-855-81	s	RES, CHIP 47 (1005)
R1601	1-208-855-81	s	RES, CHIP 47 (1005)
R1602	1-208-863-81	s	RES, CHIP 100 (1005)
R1603	1-208-918-81	s	RES, CHIP 20K (1005)
R1604	1-208-879-81	s	RES, CHIP 470 (1005)
R1605	1-208-879-81	s	RES, CHIP 470 (1005)
R1606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1616	1-208-922-81	s	RES, CHIP 30K (1005)
R1617	1-208-914-81	s	RES, CHIP 13K (1005)
R1618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1619	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1620	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1623	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1624	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1630	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1631	1-208-879-81	s	RES, CHIP 470 (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-911-81	s	RES, CHIP 10K (1005)
R1634	1-208-911-81	s	RES, CHIP 10K (1005)
R1635	1-208-871-81	s	RES, CHIP 220 (1005)
R1636	1-208-871-81	s	RES, CHIP 220 (1005)
R1637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1639	1-208-863-81	s	RES, CHIP 100 (1005)
R1640	1-208-919-81	s	RES, CHIP 22K (1005)
R1641	1-208-903-81	s	RES, CHIP 4.7K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1642	1-208-855-81	s	RES, CHIP 47 (1005)
R1643	1-208-855-81	s	RES, CHIP 47 (1005)
R1644	1-208-863-81	s	RES, CHIP 100 (1005)
R1645	1-208-918-81	s	RES, CHIP 20K (1005)
R1646	1-208-879-81	s	RES, CHIP 470 (1005)
R1647	1-208-879-81	s	RES, CHIP 470 (1005)
R1648	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1649	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1650	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1651	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1658	1-208-922-81	s	RES, CHIP 30K (1005)
R1659	1-208-914-81	s	RES, CHIP 13K (1005)
R1660	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1663	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1666	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1669	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1670	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1672	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1673	1-208-879-81	s	RES, CHIP 470 (1005)
R1674	1-208-911-81	s	RES, CHIP 10K (1005)
R1675	1-208-911-81	s	RES, CHIP 10K (1005)
R1676	1-208-911-81	s	RES, CHIP 10K (1005)
R1677	1-208-871-81	s	RES, CHIP 220 (1005)
R1678	1-208-871-81	s	RES, CHIP 220 (1005)
R1679	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1680	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1681	1-208-863-81	s	RES, CHIP 100 (1005)
R1682	1-208-919-81	s	RES, CHIP 22K (1005)
R1683	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1684	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1685	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1686	1-208-875-81	s	RES, CHIP 330 (1005)
R1687	1-220-878-81	s	RES, CHIP 22 (1005)
R1688	1-220-878-81	s	RES, CHIP 22 (1005)
R1689	1-220-878-81	s	RES, CHIP 22 (1005)
R1690	1-220-878-81	s	RES, CHIP 22 (1005)
R1691	1-220-878-81	s	RES, CHIP 22 (1005)
R1692	1-220-878-81	s	RES, CHIP 22 (1005)
R1693	1-220-878-81	s	RES, CHIP 22 (1005)
R1694	1-220-878-81	s	RES, CHIP 22 (1005)
R1695	1-220-878-81	s	RES, CHIP 22 (1005)
R1696	1-220-878-81	s	RES, CHIP 22 (1005)
R1697	1-220-878-81	s	RES, CHIP 22 (1005)
R1698	1-220-878-81	s	RES, CHIP 22 (1005)
R1699	1-220-878-81	s	RES, CHIP 22 (1005)
R1700	1-220-878-81	s	RES, CHIP 22 (1005)
R1701	1-220-878-81	s	RES, CHIP 22 (1005)
R1702	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1703	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1800	1-208-855-81	s	RES, CHIP 47 (1005)
R1801	1-208-855-81	s	RES, CHIP 47 (1005)
R1802	1-208-863-81	s	RES, CHIP 100 (1005)
R1803	1-208-918-81	s	RES, CHIP 20K (1005)
R1804	1-208-879-81	s	RES, CHIP 470 (1005)
R1805	1-208-879-81	s	RES, CHIP 470 (1005)
R1806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1810	1-208-911-81	s	RES, CHIP 10K (1005)
R1811	1-208-911-81	s	RES, CHIP 10K (1005)
R1813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1816	1-208-922-81	s	RES, CHIP 30K (1005)
R1817	1-208-914-81	s	RES, CHIP 13K (1005)
R1818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1830	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1831	1-208-879-81	s	RES, CHIP 470 (1005)
R1832	1-208-911-81	s	RES, CHIP 10K (1005)
R1833	1-208-911-81	s	RES, CHIP 10K (1005)
R1834	1-208-911-81	s	RES, CHIP 10K (1005)
R1835	1-208-871-81	s	RES, CHIP 220 (1005)
R1836	1-208-871-81	s	RES, CHIP 220 (1005)
R1837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1839	1-208-863-81	s	RES, CHIP 100 (1005)
R1840	1-208-919-81	s	RES, CHIP 22K (1005)
R1841	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1842	1-208-855-81	s	RES, CHIP 47 (1005)
R1843	1-208-855-81	s	RES, CHIP 47 (1005)
R1844	1-208-863-81	s	RES, CHIP 100 (1005)
R1845	1-208-918-81	s	RES, CHIP 20K (1005)
R1846	1-208-879-81	s	RES, CHIP 470 (1005)
R1847	1-208-879-81	s	RES, CHIP 470 (1005)
R1848	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1849	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1850	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1851	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1852	1-208-911-81	s	RES, CHIP 10K (1005)
R1853	1-208-911-81	s	RES, CHIP 10K (1005)
R1855	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1857	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1858	1-208-922-81	s	RES, CHIP 30K (1005)
R1859	1-208-914-81	s	RES, CHIP 13K (1005)
R1860	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1861	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1862	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1863	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1864	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1865	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1866	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1867	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1868	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1869	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1870	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1871	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1872	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1873	1-208-879-81	s	RES, CHIP 470 (1005)
R1874	1-208-911-81	s	RES, CHIP 10K (1005)
R1875	1-208-911-81	s	RES, CHIP 10K (1005)
R1876	1-208-911-81	s	RES, CHIP 10K (1005)
R1877	1-208-871-81	s	RES, CHIP 220 (1005)
R1878	1-208-871-81	s	RES, CHIP 220 (1005)
R1879	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1880	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1881	1-208-863-81	s	RES, CHIP 100 (1005)
R1882	1-208-919-81	s	RES, CHIP 22K (1005)
R1883	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1884	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1885	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1886	1-220-878-81	s	RES, CHIP 22 (1005)
R1887	1-220-878-81	s	RES, CHIP 22 (1005)
R1888	1-220-878-81	s	RES, CHIP 22 (1005)
R1889	1-220-878-81	s	RES, CHIP 22 (1005)
R1890	1-220-878-81	s	RES, CHIP 22 (1005)
R1891	1-220-878-81	s	RES, CHIP 22 (1005)
R1892	1-220-878-81	s	RES, CHIP 22 (1005)
R1893	1-220-878-81	s	RES, CHIP 22 (1005)
R1894	1-220-878-81	s	RES, CHIP 22 (1005)
R1895	1-220-878-81	s	RES, CHIP 22 (1005)
R1896	1-220-878-81	s	RES, CHIP 22 (1005)
R1897	1-220-878-81	s	RES, CHIP 22 (1005)
R1898	1-220-878-81	s	RES, CHIP 22 (1005)
R1899	1-220-878-81	s	RES, CHIP 22 (1005)
R1900	1-220-878-81	s	RES, CHIP 22 (1005)
R1901	1-220-878-81	s	RES, CHIP 22 (1005)
R1902	1-220-878-81	s	RES, CHIP 22 (1005)
R1903	1-220-878-81	s	RES, CHIP 22 (1005)
R1904	1-220-878-81	s	RES, CHIP 22 (1005)
R1905	1-220-878-81	s	RES, CHIP 22 (1005)
R1906	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1907	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2000	1-208-855-81	s	RES, CHIP 47 (1005)
R2001	1-208-855-81	s	RES, CHIP 47 (1005)
R2002	1-208-863-81	s	RES, CHIP 100 (1005)
R2003	1-208-918-81	s	RES, CHIP 20K (1005)
R2004	1-208-879-81	s	RES, CHIP 470 (1005)
R2005	1-208-879-81	s	RES, CHIP 470 (1005)
R2006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2010	1-208-911-81	s	RES, CHIP 10K (1005)
R2011	1-208-911-81	s	RES, CHIP 10K (1005)
R2015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2016	1-208-922-81	s	RES, CHIP 30K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2017	1-208-914-81	s	RES, CHIP 13K (1005)
R2018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2030	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2031	1-208-879-81	s	RES, CHIP 470 (1005)
R2032	1-208-911-81	s	RES, CHIP 10K (1005)
R2033	1-208-911-81	s	RES, CHIP 10K (1005)
R2034	1-208-911-81	s	RES, CHIP 10K (1005)
R2035	1-208-871-81	s	RES, CHIP 220 (1005)
R2036	1-208-871-81	s	RES, CHIP 220 (1005)
R2037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-208-863-81	s	RES, CHIP 100 (1005)
R2040	1-208-919-81	s	RES, CHIP 22K (1005)
R2041	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2042	1-208-855-81	s	RES, CHIP 47 (1005)
R2043	1-208-855-81	s	RES, CHIP 47 (1005)
R2044	1-208-863-81	s	RES, CHIP 100 (1005)
R2045	1-208-918-81	s	RES, CHIP 20K (1005)
R2046	1-208-879-81	s	RES, CHIP 470 (1005)
R2047	1-208-879-81	s	RES, CHIP 470 (1005)
R2048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2052	1-208-911-81	s	RES, CHIP 10K (1005)
R2053	1-208-911-81	s	RES, CHIP 10K (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-208-922-81	s	RES, CHIP 30K (1005)
R2059	1-208-914-81	s	RES, CHIP 13K (1005)
R2060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2072	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2073	1-208-879-81	s	RES, CHIP 470 (1005)
R2074	1-208-911-81	s	RES, CHIP 10K (1005)
R2075	1-208-911-81	s	RES, CHIP 10K (1005)
R2076	1-208-911-81	s	RES, CHIP 10K (1005)
R2077	1-208-871-81	s	RES, CHIP 220 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2078	1-208-871-81	s	RES, CHIP 220 (1005)
R2079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2081	1-208-863-81	s	RES, CHIP 100 (1005)
R2082	1-208-919-81	s	RES, CHIP 22K (1005)
R2083	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2084	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2085	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2086	1-208-875-81	s	RES, CHIP 330 (1005)
R2087	1-220-878-81	s	RES, CHIP 22 (1005)
R2088	1-220-878-81	s	RES, CHIP 22 (1005)
R2089	1-220-878-81	s	RES, CHIP 22 (1005)
R2090	1-220-878-81	s	RES, CHIP 22 (1005)
R2091	1-220-878-81	s	RES, CHIP 22 (1005)
R2092	1-220-878-81	s	RES, CHIP 22 (1005)
R2093	1-220-878-81	s	RES, CHIP 22 (1005)
R2094	1-220-878-81	s	RES, CHIP 22 (1005)
R2095	1-220-878-81	s	RES, CHIP 22 (1005)
R2096	1-220-878-81	s	RES, CHIP 22 (1005)
R2097	1-220-878-81	s	RES, CHIP 22 (1005)
R2098	1-220-878-81	s	RES, CHIP 22 (1005)
R2099	1-220-878-81	s	RES, CHIP 22 (1005)
R2100	1-220-878-81	s	RES, CHIP 22 (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2102	1-220-878-81	s	RES, CHIP 22 (1005)
R2103	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2200	1-208-879-81	s	RES, CHIP 470 (1005)
R2201	1-208-911-81	s	RES, CHIP 10K (1005)
R2202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2219	1-208-911-81	s	RES, CHIP 10K (1005)
R2220	1-208-911-81	s	RES, CHIP 10K (1005)
R2221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2232	1-220-870-81	s	RES, CHIP 10 (1005)
R2233	1-220-870-81	s	RES, CHIP 10 (1005)
R2234	1-220-870-81	s	RES, CHIP 10 (1005)
R2235	1-220-870-81	s	RES, CHIP 10 (1005)
R2236	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2237	1-220-870-81	s	RES, CHIP 10 (1005)
R2238	1-220-870-81	s	RES, CHIP 10 (1005)
R2239	1-220-870-81	s	RES, CHIP 10 (1005)
R2240	1-220-870-81	s	RES, CHIP 10 (1005)
R2241	1-220-870-81	s	RES, CHIP 10 (1005)
R2242	1-220-870-81	s	RES, CHIP 10 (1005)
R2243	1-220-870-81	s	RES, CHIP 10 (1005)
R2244	1-220-870-81	s	RES, CHIP 10 (1005)
R2245	1-220-870-81	s	RES, CHIP 10 (1005)
R2246	1-220-870-81	s	RES, CHIP 10 (1005)
R2247	1-220-870-81	s	RES, CHIP 10 (1005)
R2248	1-220-870-81	s	RES, CHIP 10 (1005)
R2249	1-220-870-81	s	RES, CHIP 10 (1005)
R2250	1-220-870-81	s	RES, CHIP 10 (1005)
R2251	1-220-870-81	s	RES, CHIP 10 (1005)
R2253	1-220-870-81	s	RES, CHIP 10 (1005)
R2254	1-220-870-81	s	RES, CHIP 10 (1005)
R2255	1-220-870-81	s	RES, CHIP 10 (1005)
R2256	1-220-878-81	s	RES, CHIP 22 (1005)
R2257	1-220-870-81	s	RES, CHIP 10 (1005)
R2258	1-220-878-81	s	RES, CHIP 22 (1005)
R2259	1-220-870-81	s	RES, CHIP 10 (1005)
R2260	1-220-878-81	s	RES, CHIP 22 (1005)
R2261	1-220-870-81	s	RES, CHIP 10 (1005)
R2262	1-220-878-81	s	RES, CHIP 22 (1005)
R2263	1-220-870-81	s	RES, CHIP 10 (1005)
R2264	1-220-870-81	s	RES, CHIP 10 (1005)
R2265	1-220-870-81	s	RES, CHIP 10 (1005)
R2266	1-220-870-81	s	RES, CHIP 10 (1005)
R2267	1-220-870-81	s	RES, CHIP 10 (1005)
R2268	1-208-911-81	s	RES, CHIP 10K (1005)
R2400	1-208-911-81	s	RES, CHIP 10K (1005)
R2401	1-208-911-81	s	RES, CHIP 10K (1005)
R2402	1-208-911-81	s	RES, CHIP 10K (1005)
R2403	1-208-911-81	s	RES, CHIP 10K (1005)
R2404	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2405	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2406	1-208-943-81	s	RES, CHIP 220K (1005)
R2407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2425	1-208-923-81	s	RES, CHIP 33K (1005)
R2426	1-208-923-81	s	RES, CHIP 33K (1005)
R2427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2428	1-220-878-81	s	RES, CHIP 22 (1005)
R2429	1-208-943-81	s	RES, CHIP 220K (1005)
R2430	1-220-878-81	s	RES, CHIP 22 (1005)
R2434	1-208-929-81	s	RES, CHIP 56K (1005)
R2436	1-208-929-81	s	RES, CHIP 56K (1005)
R2438	1-208-943-81	s	RES, CHIP 220K (1005)
R2451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2452	1-208-923-81	s	RES, CHIP 33K (1005)
R2453	1-208-923-81	s	RES, CHIP 33K (1005)
R2454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2456	1-208-943-81	s	RES, CHIP 220K (1005)
R2459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2460	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2467	1-208-929-81	s	RES, CHIP 56K (1005)
R2468	1-208-929-81	s	RES, CHIP 56K (1005)
R2470	1-208-929-81	s	RES, CHIP 56K (1005)
R2471	1-208-929-81	s	RES, CHIP 56K (1005)
R2473	1-208-929-81	s	RES, CHIP 56K (1005)
R2474	1-208-929-81	s	RES, CHIP 56K (1005)
R2475	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2476	1-208-943-81	s	RES, CHIP 220K (1005)
R2477	1-208-923-81	s	RES, CHIP 33K (1005)
R2478	1-208-923-81	s	RES, CHIP 33K (1005)
R2491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2492	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2494	1-208-943-81	s	RES, CHIP 220K (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)
R2502	1-220-878-81	s	RES, CHIP 22 (1005)
R2503	1-220-878-81	s	RES, CHIP 22 (1005)
R2504	1-220-878-81	s	RES, CHIP 22 (1005)
R2505	1-208-879-81	s	RES, CHIP 470 (1005)
R2506	1-208-879-81	s	RES, CHIP 470 (1005)
R2507	1-208-879-81	s	RES, CHIP 470 (1005)
R2508	1-208-879-81	s	RES, CHIP 470 (1005)
R2509	1-208-879-81	s	RES, CHIP 470 (1005)
R2510	1-208-879-81	s	RES, CHIP 470 (1005)
R2511	1-208-879-81	s	RES, CHIP 470 (1005)
R2512	1-208-879-81	s	RES, CHIP 470 (1005)
R2513	1-208-879-81	s	RES, CHIP 470 (1005)
R2514	1-208-879-81	s	RES, CHIP 470 (1005)
R2515	1-208-879-81	s	RES, CHIP 470 (1005)
R2516	1-208-879-81	s	RES, CHIP 470 (1005)
R2600	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2602	1-220-878-81	s	RES, CHIP 22 (1005)
R2603	1-220-878-81	s	RES, CHIP 22 (1005)
R2604	1-220-878-81	s	RES, CHIP 22 (1005)
R2605	1-220-878-81	s	RES, CHIP 22 (1005)
R2606	1-220-878-81	s	RES, CHIP 22 (1005)
R2607	1-220-878-81	s	RES, CHIP 22 (1005)
R2608	1-220-878-81	s	RES, CHIP 22 (1005)
R2609	1-220-878-81	s	RES, CHIP 22 (1005)
R2610	1-220-878-81	s	RES, CHIP 22 (1005)
R2611	1-220-878-81	s	RES, CHIP 22 (1005)
R2612	1-220-878-81	s	RES, CHIP 22 (1005)
R2613	1-220-878-81	s	RES, CHIP 22 (1005)
R2614	1-220-878-81	s	RES, CHIP 22 (1005)
R2615	1-220-878-81	s	RES, CHIP 22 (1005)
R2616	1-220-878-81	s	RES, CHIP 22 (1005)
R2617	1-220-878-81	s	RES, CHIP 22 (1005)
R2618	1-220-878-81	s	RES, CHIP 22 (1005)
R2619	1-220-878-81	s	RES, CHIP 22 (1005)
R2620	1-220-878-81	s	RES, CHIP 22 (1005)
R2621	1-220-878-81	s	RES, CHIP 22 (1005)
R2622	1-220-878-81	s	RES, CHIP 22 (1005)
R2624	1-208-911-81	s	RES, CHIP 10K (1005)
R2625	1-208-911-81	s	RES, CHIP 10K (1005)
R2626	1-208-911-81	s	RES, CHIP 10K (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2636	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2639	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2640	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2642	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2643	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2644	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2647	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2648	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2649	1-220-878-81	s	RES, CHIP 22 (1005)
R2650	1-220-878-81	s	RES, CHIP 22 (1005)
R2651	1-220-878-81	s	RES, CHIP 22 (1005)
R2652	1-220-878-81	s	RES, CHIP 22 (1005)
R2653	1-220-878-81	s	RES, CHIP 22 (1005)
R2654	1-220-878-81	s	RES, CHIP 22 (1005)
R2655	1-220-878-81	s	RES, CHIP 22 (1005)
R2656	1-220-878-81	s	RES, CHIP 22 (1005)
R2657	1-220-878-81	s	RES, CHIP 22 (1005)
R2658	1-220-878-81	s	RES, CHIP 22 (1005)
R2659	1-220-878-81	s	RES, CHIP 22 (1005)
R2660	1-220-878-81	s	RES, CHIP 22 (1005)
R2661	1-220-878-81	s	RES, CHIP 22 (1005)
R2662	1-220-878-81	s	RES, CHIP 22 (1005)
R2663	1-220-878-81	s	RES, CHIP 22 (1005)
R2664	1-220-878-81	s	RES, CHIP 22 (1005)
R2665	1-220-878-81	s	RES, CHIP 22 (1005)
R2666	1-220-878-81	s	RES, CHIP 22 (1005)
R2667	1-220-878-81	s	RES, CHIP 22 (1005)
R2668	1-220-878-81	s	RES, CHIP 22 (1005)
R2669	1-220-878-81	s	RES, CHIP 22 (1005)
R2670	1-220-878-81	s	RES, CHIP 22 (1005)
R2671	1-220-878-81	s	RES, CHIP 22 (1005)
R2672	1-220-878-81	s	RES, CHIP 22 (1005)
R2673	1-220-878-81	s	RES, CHIP 22 (1005)
R2674	1-220-878-81	s	RES, CHIP 22 (1005)
R2675	1-220-878-81	s	RES, CHIP 22 (1005)
R2676	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2677	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2678	1-208-911-81	s	RES, CHIP 10K (1005)
R2679	1-208-915-81	s	RES, CHIP 15K (1005)
R2680	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2681	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2682	1-208-913-81	s	RES, CHIP 12K (1005)
R2683	1-208-879-81	s	RES, CHIP 470 (1005)
R2684	1-208-911-81	s	RES, CHIP 10K (1005)
R2685	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2689	1-208-911-81	s	RES, CHIP 10K (1005)
R2800	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2806	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2807	1-220-878-81	s	RES, CHIP 22 (1005)
R2808	1-220-878-81	s	RES, CHIP 22 (1005)
R2809	1-220-878-81	s	RES, CHIP 22 (1005)
R2810	1-220-878-81	s	RES, CHIP 22 (1005)
R2811	1-220-878-81	s	RES, CHIP 22 (1005)
R2812	1-220-878-81	s	RES, CHIP 22 (1005)
R2813	1-220-878-81	s	RES, CHIP 22 (1005)
R2814	1-220-878-81	s	RES, CHIP 22 (1005)
R2815	1-220-878-81	s	RES, CHIP 22 (1005)
R2816	1-220-878-81	s	RES, CHIP 22 (1005)
R2817	1-220-878-81	s	RES, CHIP 22 (1005)
R2818	1-220-878-81	s	RES, CHIP 22 (1005)
R2819	1-220-878-81	s	RES, CHIP 22 (1005)
R2820	1-220-878-81	s	RES, CHIP 22 (1005)
R2821	1-220-878-81	s	RES, CHIP 22 (1005)
R2822	1-220-878-81	s	RES, CHIP 22 (1005)
R2823	1-208-875-81	s	RES, CHIP 330 (1005)
R2824	1-208-875-81	s	RES, CHIP 330 (1005)
R2825	1-208-875-81	s	RES, CHIP 330 (1005)
R2826	1-208-875-81	s	RES, CHIP 330 (1005)
R2827	1-208-875-81	s	RES, CHIP 330 (1005)
R2828	1-208-875-81	s	RES, CHIP 330 (1005)
R2831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2900	1-208-935-81	s	RES, CHIP 100K (1005)
R2901	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2902	1-208-863-81	s	RES, CHIP 100 (1005)
R2903	1-208-935-81	s	RES, CHIP 100K (1005)
R2904	1-208-863-81	s	RES, CHIP 100 (1005)
R2905	1-208-863-81	s	RES, CHIP 100 (1005)
R2906	1-208-863-81	s	RES, CHIP 100 (1005)
R2907	1-208-863-81	s	RES, CHIP 100 (1005)
R2908	1-208-911-81	s	RES, CHIP 10K (1005)
R2909	1-208-863-81	s	RES, CHIP 100 (1005)
R2910	1-208-911-81	s	RES, CHIP 10K (1005)
R2911	1-208-923-81	s	RES, CHIP 33K (1005)
R2912	1-208-911-81	s	RES, CHIP 10K (1005)
R2913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2914	1-208-863-81	s	RES, CHIP 100 (1005)
R2915	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2917	1-208-863-81	s	RES, CHIP 100 (1005)
R2918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2919	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2920	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2921	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2922	1-220-878-81	s	RES, CHIP 22 (1005)
R2923	1-208-943-81	s	RES, CHIP 220K (1005)
R2924	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2925	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2926	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2927	1-208-863-81	s	RES, CHIP 100 (1005)
R2928	1-208-863-81	s	RES, CHIP 100 (1005)
R2929	1-208-875-81	s	RES, CHIP 330 (1005)
R2930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2931	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2933	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2934	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2935	1-208-875-81	s	RES, CHIP 330 (1005)
R2936	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2937	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2938	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2939	1-208-863-81	s	RES, CHIP 100 (1005)
R2940	1-208-863-81	s	RES, CHIP 100 (1005)
R2943	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2944	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2945	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2946	1-208-935-81	s	RES, CHIP 100K (1005)
R2947	1-208-898-81	s	RES, CHIP 3.0K (1005)
R2948	1-208-870-81	s	RES, CHIP 200 (1005)
R2949	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2952	1-208-898-81	s	RES, CHIP 3.0K (1005)
R2953	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2954	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2955	1-208-935-81	s	RES, CHIP 100K (1005)
R2956	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2957	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2959	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2960	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2961	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2962	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2963	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2964	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2965	1-208-911-81	s	RES, CHIP 10K (1005)
R2966	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2967	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2968	1-208-863-81	s	RES, CHIP 100 (1005)
R2969	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2970	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2971	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2972	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2973	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2974	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2975	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2976	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2977	1-220-878-81	s	RES, CHIP 22 (1005)
R2978	1-220-878-81	s	RES, CHIP 22 (1005)
R2979	1-220-878-81	s	RES, CHIP 22 (1005)
R2980	1-220-878-81	s	RES, CHIP 22 (1005)
R2981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2982	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2983	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2984	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2985	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2986	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2991	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2992	1-208-875-81	s	RES, CHIP 330 (1005)
R2995	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2996	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2997	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2998	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2999	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3002	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3003	1-208-863-81	s	RES, CHIP 100 (1005)
R3004	1-208-863-81	s	RES, CHIP 100 (1005)
R3005	1-208-863-81	s	RES, CHIP 100 (1005)
R3006	1-208-863-81	s	RES, CHIP 100 (1005)
R3007	1-208-863-81	s	RES, CHIP 100 (1005)
R3008	1-208-863-81	s	RES, CHIP 100 (1005)
R3009	1-208-863-81	s	RES, CHIP 100 (1005)
R3010	1-208-863-81	s	RES, CHIP 100 (1005)
R3011	1-208-863-81	s	RES, CHIP 100 (1005)
R3012	1-208-863-81	s	RES, CHIP 100 (1005)
R3013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3015	1-208-911-81	s	RES, CHIP 10K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)
R3017	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-923-81	s	RES, CHIP 33K (1005)
R3019	1-208-923-81	s	RES, CHIP 33K (1005)
R3020	1-208-923-81	s	RES, CHIP 33K (1005)
R3021	1-208-923-81	s	RES, CHIP 33K (1005)
R3022	1-208-923-81	s	RES, CHIP 33K (1005)
R3023	1-208-923-81	s	RES, CHIP 33K (1005)
R3024	1-208-923-81	s	RES, CHIP 33K (1005)
R3025	1-208-923-81	s	RES, CHIP 33K (1005)
R3026	1-208-923-81	s	RES, CHIP 33K (1005)
R3027	1-208-923-81	s	RES, CHIP 33K (1005)
R3028	1-208-911-81	s	RES, CHIP 10K (1005)
R3029	1-208-911-81	s	RES, CHIP 10K (1005)
R3030	1-208-959-81	s	RES, CHIP 1M (1005)
R3037	1-208-923-81	s	RES, CHIP 33K (1005)
R3038	1-208-923-81	s	RES, CHIP 33K (1005)
R3039	1-208-923-81	s	RES, CHIP 33K (1005)
R3040	1-208-923-81	s	RES, CHIP 33K (1005)
R3041	1-208-923-81	s	RES, CHIP 33K (1005)
R3042	1-208-923-81	s	RES, CHIP 33K (1005)
R3043	1-208-923-81	s	RES, CHIP 33K (1005)
R3044	1-208-923-81	s	RES, CHIP 33K (1005)
R3045	1-208-923-81	s	RES, CHIP 33K (1005)
R3046	1-208-923-81	s	RES, CHIP 33K (1005)
R3047	1-208-927-81	s	RES, CHIP 47K (1005)
R3048	1-208-927-81	s	RES, CHIP 47K (1005)
R3049	1-208-927-81	s	RES, CHIP 47K (1005)
R3050	1-208-927-81	s	RES, CHIP 47K (1005)
R3051	1-208-927-81	s	RES, CHIP 47K (1005)
R3052	1-208-927-81	s	RES, CHIP 47K (1005)
R3053	1-208-935-81	s	RES, CHIP 100K (1005)
R3054	1-208-927-81	s	RES, CHIP 47K (1005)
R3055	1-208-927-81	s	RES, CHIP 47K (1005)
R3056	1-208-927-81	s	RES, CHIP 47K (1005)
R3057	1-208-863-81	s	RES, CHIP 100 (1005)
R3058	1-208-863-81	s	RES, CHIP 100 (1005)
R3059	1-208-863-81	s	RES, CHIP 100 (1005)
R3060	1-208-863-81	s	RES, CHIP 100 (1005)
R3061	1-208-863-81	s	RES, CHIP 100 (1005)
R3062	1-208-863-81	s	RES, CHIP 100 (1005)
R3063	1-208-863-81	s	RES, CHIP 100 (1005)
R3064	1-208-863-81	s	RES, CHIP 100 (1005)
R3065	1-208-863-81	s	RES, CHIP 100 (1005)
R3066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3070	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3072	1-208-923-81	s	RES, CHIP 33K (1005)
R3073	1-208-923-81	s	RES, CHIP 33K (1005)
R3074	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3075	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3076	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3300	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3316	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3320	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3338	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3340	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3342	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3344	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3345	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3346	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3347	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3348	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3349	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3352	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3357	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3361	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3363	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3370	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3371	1-208-865-81	s	RES, CHIP 120 (1005)
R3372	1-208-865-81	s	RES, CHIP 120 (1005)
R3373	1-208-865-81	s	RES, CHIP 120 (1005)
R3374	1-208-865-81	s	RES, CHIP 120 (1005)
R3375	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3376	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3377	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3378	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3379	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3380	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3381	1-208-865-81	s	RES, CHIP 120 (1005)
R3382	1-208-865-81	s	RES, CHIP 120 (1005)
R3383	1-208-865-81	s	RES, CHIP 120 (1005)
R3384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3388	1-208-865-81	s	RES, CHIP 120 (1005)
R3389	1-208-865-81	s	RES, CHIP 120 (1005)
R3390	1-208-865-81	s	RES, CHIP 120 (1005)
R3391	1-208-865-81	s	RES, CHIP 120 (1005)
R3392	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3393	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3394	1-208-865-81	s	RES, CHIP 120 (1005)
R3395	1-208-865-81	s	RES, CHIP 120 (1005)
R3396	1-208-865-81	s	RES, CHIP 120 (1005)
R3397	1-208-865-81	s	RES, CHIP 120 (1005)
R3398	1-208-865-81	s	RES, CHIP 120 (1005)
R3399	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-208-865-81	s	RES, CHIP 120 (1005)
R3402	1-208-865-81	s	RES, CHIP 120 (1005)
R3403	1-208-865-81	s	RES, CHIP 120 (1005)
R3404	1-208-865-81	s	RES, CHIP 120 (1005)
R3405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3407	1-208-865-81	s	RES, CHIP 120 (1005)
R3408	1-208-865-81	s	RES, CHIP 120 (1005)
R3409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3411	1-208-865-81	s	RES, CHIP 120 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3412	1-208-865-81	s	RES, CHIP 120 (1005)
R3413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3415	1-208-863-81	s	RES, CHIP 100 (1005)
R3416	1-208-863-81	s	RES, CHIP 100 (1005)
R3417	1-208-863-81	s	RES, CHIP 100 (1005)
R3418	1-208-863-81	s	RES, CHIP 100 (1005)
R3419	1-208-863-81	s	RES, CHIP 100 (1005)
R3420	1-208-863-81	s	RES, CHIP 100 (1005)
R3421	1-208-863-81	s	RES, CHIP 100 (1005)
R3422	1-208-863-81	s	RES, CHIP 100 (1005)
R3423	1-208-863-81	s	RES, CHIP 100 (1005)
R3424	1-208-863-81	s	RES, CHIP 100 (1005)
R3425	1-208-863-81	s	RES, CHIP 100 (1005)
R3426	1-208-863-81	s	RES, CHIP 100 (1005)
R3427	1-208-863-81	s	RES, CHIP 100 (1005)
R3428	1-208-863-81	s	RES, CHIP 100 (1005)
R3429	1-208-863-81	s	RES, CHIP 100 (1005)
R3430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3439	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3447	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3449	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3457	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3466	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3469	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3470	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3471	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3473	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3475	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3476	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3477	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3478	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3480	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3481	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3482	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3483	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3484	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3486	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3487	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3488	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3489	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3490	1-220-870-81	s	RES, CHIP 10 (1005)
R3491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3492	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3493	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3494	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3495	1-220-870-81	s	RES, CHIP 10 (1005)
R3496	1-220-870-81	s	RES, CHIP 10 (1005)
R3497	1-220-870-81	s	RES, CHIP 10 (1005)
R3498	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3499	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3529	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3531	1-208-879-81	s	RES, CHIP 470 (1005)
R3532	1-208-879-81	s	RES, CHIP 470 (1005)
R3533	1-208-879-81	s	RES, CHIP 470 (1005)
R3534	1-208-879-81	s	RES, CHIP 470 (1005)
R3535	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3536	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3539	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3540	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3541	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3542	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3544	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3545	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3546	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3547	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3548	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3549	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3550	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3554	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3556	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3557	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3558	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3567	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3569	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3570	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3571	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3572	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3573	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3574	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3575	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3576	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3577	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3578	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3579	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3580	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3581	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3582	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3583	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3584	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3585	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3586	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3587	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3589	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3590	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3591	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3592	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3593	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3594	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3595	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3596	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3597	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3598	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3599	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3600	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3616	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3617	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3619	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3623	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3624	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4015	1-208-859-81	s	RES, CHIP 68 (1005)
R4016	1-208-859-81	s	RES, CHIP 68 (1005)
R4017	1-208-859-81	s	RES, CHIP 68 (1005)
R4018	1-208-859-81	s	RES, CHIP 68 (1005)
R4019	1-208-859-81	s	RES, CHIP 68 (1005)
R4020	1-208-859-81	s	RES, CHIP 68 (1005)
R4021	1-208-859-81	s	RES, CHIP 68 (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4022	1-208-859-81	s	RES, CHIP 68 (1005)
R4023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4073	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4074	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4075	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4076	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4077	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4078	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4080	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4081	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4082	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4083	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4084	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4085	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4086	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4087	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4088	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4089	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4090	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4091	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4092	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4093	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4094	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4095	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4096	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4097	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4098	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4099	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4124	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4133	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4134	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4136	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4137	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4139	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4148	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4150	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4157	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4158	1-220-870-81	s	RES, CHIP 10 (1005)
R4159	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4160	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4161	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4163	1-220-870-81	s	RES, CHIP 10 (1005)
R4164	1-220-870-81	s	RES, CHIP 10 (1005)
R4165	1-220-870-81	s	RES, CHIP 10 (1005)
R4166	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4171	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4173	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4174	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4175	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4176	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4177	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4178	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4179	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4180	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4181	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4182	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4183	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4188	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4189	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4190	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4191	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4192	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4194	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4195	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4196	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4197	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4198	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4199	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4200	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4211	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4212	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R5001	1-208-863-81	s	RES, CHIP 100 (1005)
R5002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5007	1-208-865-81	s	RES, CHIP 120 (1005)
R5008	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5009	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB101	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB102	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB105	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB114	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB115	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB116	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB117	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB118	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB119	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB121	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB122	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB123	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB124	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB125	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB200	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB203	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB204	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB208	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB209	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB400	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB401	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB405	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB406	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB407	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB408	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB409	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB410	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB411	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB412	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB413	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB414	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB415	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB416	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB601	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB602	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB800	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2202	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2203	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2600	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2606	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2607	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2900	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB2901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3300	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3306	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3307	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3308	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3309	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3310	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3311	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3312	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3313	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3314	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3315	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3316	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3317	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4000	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4006	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4007	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4008	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4009	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4010	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4011	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4012	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4018	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4019	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4020	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4021	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4022	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4023	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4024	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4025	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4026	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4027	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4028	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4029	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4030	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4031	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S400	1-692-270-41	s	SWITCH, SLIDE
S401	1-771-721-21	s	SWITCH, TACTILE
S402	1-771-721-21	s	SWITCH, TACTILE
S403	1-692-270-41	s	SWITCH, SLIDE
S601	1-692-270-41	s	SWITCH, SLIDE
S2200	1-692-270-41	s	SWITCH, SLIDE
S2900	1-771-721-21	s	SWITCH, TACTILE
S2901	1-692-270-41	s	SWITCH, SLIDE
S3300	1-692-270-41	s	SWITCH, SLIDE
S3301	1-762-117-21	s	SWITCH, ROTARY
S4000	1-692-270-41	s	SWITCH, SLIDE
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP204	1-535-877-22	s	CHIP, CHECKER
TP205	1-535-877-22	s	CHIP, CHECKER
TP206	1-535-877-22	s	CHIP, CHECKER
TP207	1-535-877-22	s	CHIP, CHECKER
TP208	1-535-877-22	s	CHIP, CHECKER
TP209	1-535-877-22	s	CHIP, CHECKER
TP210	1-535-877-22	s	CHIP, CHECKER

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP211	1-535-877-22	s	CHIP, CHECKER
TP212	1-535-877-22	s	CHIP, CHECKER
TP213	1-535-877-22	s	CHIP, CHECKER
TP214	1-535-877-22	s	CHIP, CHECKER
TP215	1-535-877-22	s	CHIP, CHECKER
TP216	1-535-877-22	s	CHIP, CHECKER
TP600	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
TP602	1-535-877-22	s	CHIP, CHECKER
TP603	1-535-877-22	s	CHIP, CHECKER
TP604	1-535-877-22	s	CHIP, CHECKER
TP605	1-535-877-22	s	CHIP, CHECKER
TP606	1-535-877-22	s	CHIP, CHECKER
TP607	1-535-877-22	s	CHIP, CHECKER
TP608	1-535-877-22	s	CHIP, CHECKER
TP609	1-535-877-22	s	CHIP, CHECKER
TP610	1-535-877-22	s	CHIP, CHECKER
TP611	1-535-877-22	s	CHIP, CHECKER
TP612	1-535-877-22	s	CHIP, CHECKER
TP613	1-535-877-22	s	CHIP, CHECKER
TP614	1-535-877-22	s	CHIP, CHECKER
TP615	1-535-877-22	s	CHIP, CHECKER
TP616	1-535-877-22	s	CHIP, CHECKER
TP617	1-535-877-22	s	CHIP, CHECKER
TP618	1-535-877-22	s	CHIP, CHECKER
TP619	1-535-877-22	s	CHIP, CHECKER
TP620	1-535-877-22	s	CHIP, CHECKER
TP621	1-535-877-22	s	CHIP, CHECKER
TP622	1-535-877-22	s	CHIP, CHECKER
TP623	1-535-877-22	s	CHIP, CHECKER
TP624	1-535-877-22	s	CHIP, CHECKER
TP625	1-535-877-22	s	CHIP, CHECKER
TP626	1-535-877-22	s	CHIP, CHECKER
TP627	1-535-877-22	s	CHIP, CHECKER
TP628	1-535-877-22	s	CHIP, CHECKER
TP629	1-535-877-22	s	CHIP, CHECKER
TP630	1-535-877-22	s	CHIP, CHECKER
TP631	1-535-877-22	s	CHIP, CHECKER
TP800	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP803	1-535-877-22	s	CHIP, CHECKER
TP804	1-535-877-22	s	CHIP, CHECKER
TP805	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP904	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1002	1-535-877-22	s	CHIP, CHECKER
TP1003	1-535-877-22	s	CHIP, CHECKER
TP1004	1-535-877-22	s	CHIP, CHECKER
TP1005	1-535-877-22	s	CHIP, CHECKER
TP1006	1-535-877-22	s	CHIP, CHECKER
TP1007	1-535-877-22	s	CHIP, CHECKER
TP1200	1-535-877-22	s	CHIP, CHECKER
TP1201	1-535-877-22	s	CHIP, CHECKER

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP1202	1-535-877-22	s	CHIP, CHECKER
TP1203	1-535-877-22	s	CHIP, CHECKER
TP1204	1-535-877-22	s	CHIP, CHECKER
TP1205	1-535-877-22	s	CHIP, CHECKER
TP1206	1-535-877-22	s	CHIP, CHECKER
TP1207	1-535-877-22	s	CHIP, CHECKER
TP1208	1-535-877-22	s	CHIP, CHECKER
TP1209	1-535-877-22	s	CHIP, CHECKER
TP1210	1-535-877-22	s	CHIP, CHECKER
TP1211	1-535-877-22	s	CHIP, CHECKER
TP1212	1-535-877-22	s	CHIP, CHECKER
TP1213	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1404	1-535-877-22	s	CHIP, CHECKER
TP1405	1-535-877-22	s	CHIP, CHECKER
TP1406	1-535-877-22	s	CHIP, CHECKER
TP1407	1-535-877-22	s	CHIP, CHECKER
TP1600	1-535-877-22	s	CHIP, CHECKER
TP1601	1-535-877-22	s	CHIP, CHECKER
TP1602	1-535-877-22	s	CHIP, CHECKER
TP1603	1-535-877-22	s	CHIP, CHECKER
TP1604	1-535-877-22	s	CHIP, CHECKER
TP1605	1-535-877-22	s	CHIP, CHECKER
TP1606	1-535-877-22	s	CHIP, CHECKER
TP1607	1-535-877-22	s	CHIP, CHECKER
TP1608	1-535-877-22	s	CHIP, CHECKER
TP1609	1-535-877-22	s	CHIP, CHECKER
TP1610	1-535-877-22	s	CHIP, CHECKER
TP1611	1-535-877-22	s	CHIP, CHECKER
TP1612	1-535-877-22	s	CHIP, CHECKER
TP1613	1-535-877-22	s	CHIP, CHECKER
TP1800	1-535-877-22	s	CHIP, CHECKER
TP1801	1-535-877-22	s	CHIP, CHECKER
TP1802	1-535-877-22	s	CHIP, CHECKER
TP1803	1-535-877-22	s	CHIP, CHECKER
TP1804	1-535-877-22	s	CHIP, CHECKER
TP1805	1-535-877-22	s	CHIP, CHECKER
TP1806	1-535-877-22	s	CHIP, CHECKER
TP1807	1-535-877-22	s	CHIP, CHECKER
TP2000	1-535-877-22	s	CHIP, CHECKER
TP2001	1-535-877-22	s	CHIP, CHECKER
TP2002	1-535-877-22	s	CHIP, CHECKER
TP2003	1-535-877-22	s	CHIP, CHECKER
TP2004	1-535-877-22	s	CHIP, CHECKER
TP2005	1-535-877-22	s	CHIP, CHECKER
TP2006	1-535-877-22	s	CHIP, CHECKER
TP2007	1-535-877-22	s	CHIP, CHECKER
TP2008	1-535-877-22	s	CHIP, CHECKER
TP2009	1-535-877-22	s	CHIP, CHECKER
TP2010	1-535-877-22	s	CHIP, CHECKER
TP2011	1-535-877-22	s	CHIP, CHECKER
TP2012	1-535-877-22	s	CHIP, CHECKER
TP2013	1-535-877-22	s	CHIP, CHECKER
TP2600	1-535-877-22	s	CHIP, CHECKER
TP2900	1-535-877-22	s	CHIP, CHECKER

(EQ-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
X200	1-813-950-11	s	OSCILLATOR, CRYSTAL(51.722710)
X201	1-813-951-11	s	OSCILLATOR, CRYSTAL(51.671039)
X202	1-813-952-11	s	OSCILLATOR, CRYSTAL(43.102258)
X203	1-813-953-11	s	OSCILLATOR, CRYSTAL(41.378168)
X204	1-813-954-11	s	OSCILLATOR, CRYSTAL(41.336831)
X2900 *a	1-813-028-21	s	OSCILLATOR, CRYSTAL (SMD)
*b	1-814-002-11	s	OSCILLATOR, CRYSTAL (8MHZ)

EQ-109 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1768-614-A	s	MOUNTED CIRCUIT BOARD, EQ-109
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
12pcs	3-182-839-01	o	BRACKET, HEAT SINK RETAINER
12pcs	3-182-840-02	s	HEAT SINK (EQ)
6pcs	7-621-759-45	s	+PSW, 2.6X6
1.09pcs	7-640-005-23	s	SOLDER (F3M705,D0.8) 1.0KG
C100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C120	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C121	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C122	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C123	1-135-342-21	s	CAP, ELECT 56MF (6.3X6)
C124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C128	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C129	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C130	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C131	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C132	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C134	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C136	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C137	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C138	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C139	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C140	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C141	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C142	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C143	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C144	1-131-995-21	s	CAP, ELECT 100MF (6.3X6)
C145	1-131-995-21	s	CAP, ELECT 100MF (6.3X6)
C146	1-117-949-81	s	CAP, CHIP CERAMIC 820PF B1005
C147	1-117-949-81	s	CAP, CHIP CERAMIC 820PF B1005
C148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C149	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C150	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C151	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C152	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C153	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C154	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C155	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C156	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C157	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C158	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C159	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C160	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C161	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C162	1-131-995-21	s	CAP, ELECT 100MF (6.3X6)
C163	1-117-949-81	s	CAP, CHIP CERAMIC 820PF B1005
C164	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C165	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C166	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C203	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C210	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C211	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C212	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C213	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C329	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C400	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C401	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C407	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C424	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C434	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C447	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C450	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C452	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C454	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C458	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C614	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C619	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C621	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C626	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C627	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C628	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C629	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C631	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C632	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C633	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C634	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C635	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C636	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C639	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C640	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C641	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C643	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C644	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C650	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C651	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C653	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C654	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C655	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C656	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C657	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C659	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C661	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C662	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C663	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C664	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C665	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C666	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C667	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C668	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C669	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C670	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C671	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C672	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C673	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C674	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C675	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C676	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C677	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C678	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C679	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C680	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C681	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C682	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C684	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C686	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C687	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C688	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C689	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C690	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C691	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C692	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C693	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C694	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C695	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C696	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C697	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C698	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C699	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C700	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C701	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C718	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C721	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C723	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C724	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C726	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C727	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C804	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C806	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C807	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C808	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C810	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C811	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C817	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C819	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C824	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C825	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C862	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C900	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C902	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C903	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C904	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C905	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C906	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C908	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C916	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C917	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C918	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C920	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C922	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C924	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C926	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C927	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C928	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C930	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C932	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C934	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C935	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C937	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C940	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C942	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C943	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C944	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C945	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C946	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C947	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C948	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C949	1-100-574-81	s	CAP,CHIP CERAMIC 270PF B 1005
C950	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C953	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C954	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C955	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C956	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C957	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C958	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C959	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C962	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C964	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C967	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1004	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1005	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1017	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1019	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1028	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1032	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1033	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1045	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1047	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1056	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1061	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1062	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C1200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1204	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1205	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1217	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1219	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1231	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1232	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1233	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1245	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1247	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1255	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1404	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1405	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1414	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1417	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1419	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1432	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1433	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1445	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1447	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1448	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1449	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1460	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C1600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1601	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1604	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1605	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1617	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1619	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1622	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1624	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1625	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1627	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1628	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1631	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1632	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1633	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1634	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1635	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1636	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1637	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1638	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1639	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1640	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1641	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1642	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1643	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1644	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1645	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1646	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1647	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1648	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1649	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1650	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1651	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1653	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1655	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1804	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1805	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1817	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1819	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1829	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1831	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1832	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C1833	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1835	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1837	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1839	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1840	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1841	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1843	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1845	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1846	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1847	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1850	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1851	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1852	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1853	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1855	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1858	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1859	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1860	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2004	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2005	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2017	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C2018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2019	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2021	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2028	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2032	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C2033	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2038	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2039	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2040	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2041	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2043	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2045	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C2046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2047	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2048	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2052	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2203	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2206	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2209	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2212	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2215	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2216	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2220	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2221	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2224	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2225	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2226	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2227	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2230	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2231	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2246	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2252	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2253	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2254	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2255	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2257	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2260	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2261	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2264	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2265	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2266	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2267	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2268	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2269	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2270	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2271	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2275	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2276	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2280	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2281	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2283	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2284	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2285	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2286	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2287	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2288	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2289	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2290	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2291	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2292	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2293	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2294	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2295	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2296	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2297	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2298	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2299	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2307	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2308	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2309	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C2310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2322	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2323	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C2324	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2325	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2326	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2328	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2330	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C2331	1-131-998-21	s	CAP, ELECT 82MF (6.3X6)
C2400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2408	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2413	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2414	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2447	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2451	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2465	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2466	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2467	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2468	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2469	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2470	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2471	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2472	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2474	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2476	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2477	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2478	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2479	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2480	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2481	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2485	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2486	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2487	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2488	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2489	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2490	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2491	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2492	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2493	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2494	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2495	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2496	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2497	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2498	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2499	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2510	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2511	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2518	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2524	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2601	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2602	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2606	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2609	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2619	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2620	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2621	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2622	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2623	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2625	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2626	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2627	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2628	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2631	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2632	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2633	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2634	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2635	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2636	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2637	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2638	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2639	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2640	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2641	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2642	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2643	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2644	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2645	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2646	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2647	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C2648	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2649	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2650	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2651	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2652	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2653	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2654	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2655	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2656	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2657	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2658	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2659	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2814	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2815	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2817	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2819	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2821	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2823	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2825	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2827	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2829	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C2900	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C2901	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2902	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2904	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C2905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2906	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C2907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2910	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2912	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2914	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2918	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2920	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2922	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2923	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2924	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2926	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2928	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2929	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2930	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2931	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2932	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2933	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2934	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2935	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2936	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2937	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2938	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2939	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2940	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2941	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2942	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2943	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2944	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2945	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2946	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2967	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
CN100	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN400	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN600	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN800	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN801	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN802	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1000	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1200	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1400	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1600	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN1800	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN2000	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN2200	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN2800	1-770-453-21	o	CONNECTOR, BOARD TO BOARD 70P
CN2900	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN2901	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN2902	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
D1200	8-719-074-31	s	DIODE CL-196YG-CD-T
D1600	8-719-074-31	s	DIODE CL-196YG-CD-T
D2000	8-719-074-31	s	DIODE CL-196YG-CD-T
D2800	8-719-074-31	s	DIODE CL-196YG-CD-T
D2801	8-719-074-31	s	DIODE CL-196YG-CD-T
D2802	8-719-074-31	s	DIODE CL-196YG-CD-T
D2803	8-719-074-31	s	DIODE CL-196YG-CD-T
D2804	8-719-074-31	s	DIODE CL-196YG-CD-T
D2805	8-719-074-31	s	DIODE CL-196YG-CD-T
D2900	8-719-941-84	s	DIODE DA204UT106
D2901	8-719-074-31	s	DIODE CL-196YG-CD-T
D2902	8-719-074-31	s	DIODE CL-196YG-CD-T
D2903	8-719-074-31	s	DIODE CL-196YG-CD-T
D3300	8-719-074-31	s	DIODE CL-196YG-CD-T
D3301	8-719-074-31	s	DIODE CL-196YG-CD-T
D3302	8-719-074-31	s	DIODE CL-196YG-CD-T
D3303	8-719-074-31	s	DIODE CL-196YG-CD-T
D4000	8-719-074-31	s	DIODE CL-196YG-CD-T
D4001	8-719-074-31	s	DIODE CL-196YG-CD-T

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D4002	8-719-074-31	s	DIODE CL-196YG-CD-T
D4003	8-719-077-09	s	DIODE CL-196HR-CD-T
D4004	8-719-074-31	s	DIODE CL-196YG-CD-T
D4005	8-719-074-31	s	DIODE CL-196YG-CD-T
D4006	8-719-074-31	s	DIODE CL-196YG-CD-T
D4007	8-719-077-09	s	DIODE CL-196HR-CD-T
E100	1-535-877-22	s	CHIP, CHECKER
E101	1-535-877-22	s	CHIP, CHECKER
E102	1-535-877-22	s	CHIP, CHECKER
E103	1-535-877-22	s	CHIP, CHECKER
E200	1-535-877-22	s	CHIP, CHECKER
E201	1-535-877-22	s	CHIP, CHECKER
E202	1-535-877-22	s	CHIP, CHECKER
E300	1-535-877-22	s	CHIP, CHECKER
E301	1-535-877-22	s	CHIP, CHECKER
E400	1-535-877-22	s	CHIP, CHECKER
E401	1-535-877-22	s	CHIP, CHECKER
E402	1-535-877-22	s	CHIP, CHECKER
E600	1-535-877-22	s	CHIP, CHECKER
E800	1-535-877-22	s	CHIP, CHECKER
E900	1-535-877-22	s	CHIP, CHECKER
E901	1-535-877-22	s	CHIP, CHECKER
E1000	1-535-877-22	s	CHIP, CHECKER
E1400	1-535-877-22	s	CHIP, CHECKER
E1800	1-535-877-22	s	CHIP, CHECKER
E2800	1-535-877-22	s	CHIP, CHECKER
E2801	1-535-877-22	s	CHIP, CHECKER
E2900	1-535-877-22	s	CHIP, CHECKER
F100	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F101	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
F102	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F103	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
FB100	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB200	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2200	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2201	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2600	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2601	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FB2602	1-469-100-21	s	FERRITE, EMI (SMD) (1608)
FL900	1-234-844-11	s	FILTER, BAND PASS
FL901	1-200-047-11	s	FILTER, BAND PASS
FL902	1-200-046-11	s	FILTER, BAND PASS
FL903	1-234-845-11	s	FILTER, BAND PASS
FL904	1-234-849-11	s	FILTER, BAND PASS
FL905	1-234-848-11	s	FILTER, BAND PASS
FL906	1-200-049-11	s	FILTER, BAND PASS
FL907	1-200-048-11	s	FILTER, BAND PASS
IC100	8-759-679-57	s	IC SN74LVC00APWR
IC101	8-759-573-97	s	IC SN74LVC541APWR
IC102	8-759-573-97	s	IC SN74LVC541APWR
IC103	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC104	8-759-573-97	s	IC SN74LVC541APWR

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC105	8-759-392-77	s	IC SN74LVC245APWR
IC106	8-759-573-97	s	IC SN74LVC541APWR
IC107	6-708-538-01	s	IC CDCVF2510APWR
IC108	8-759-392-77	s	IC SN74LVC245APWR
IC109	8-759-573-97	s	IC SN74LVC541APWR
IC110	8-759-392-77	s	IC SN74LVC245APWR
IC111	8-759-392-77	s	IC SN74LVC245APWR
IC113	8-759-392-77	s	IC SN74LVC245APWR
IC114	6-701-572-01	s	IC TPS54610PWPR
IC115	6-701-572-01	s	IC TPS54610PWPR
IC116	6-701-572-01	s	IC TPS54610PWPR
IC200	6-700-764-01	s	IC DS90CR288AMTDX
IC201	6-708-538-01	s	IC CDCVF2510APWR
IC203	8-759-573-97	s	IC SN74LVC541APWR
IC204	8-759-573-97	s	IC SN74LVC541APWR
IC207	6-708-538-01	s	IC CDCVF2510APWR
IC209	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC400	8-759-183-53	s	IC TL431CPK-E2
IC401	8-759-337-40	s	IC NJM2904V(TE2)
IC403	8-759-675-47	s	IC SN74LVC04APWR
IC404	8-759-669-43	s	IC SN74LVC157APWR-12
IC405	8-759-669-41	s	IC SN74LVC125APWR-12
IC406	8-759-669-43	s	IC SN74LVC157APWR-12
IC407	8-759-573-97	s	IC SN74LVC541APWR
IC409	6-710-605-01	s	IC MAX1617AMEE+TG069
IC411	6-710-605-01	s	IC MAX1617AMEE+TG069
IC412	6-714-365-01	s	IC MX29LV640EBTI-70G
IC800	8-759-675-54	s	IC TC7W53FK(TE85R)
IC801	6-707-877-01	s	IC TC74VHC32FT(EKJ)
IC802	8-753-341-20	s	IC CXA3513R
IC803	6-714-624-01	s	IC M62352AGP
IC804	8-753-341-20	s	IC CXA3513R
IC805	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC806	6-708-334-01	s	IC TK72250CSCL-G
IC807	6-707-877-01	s	IC TC74VHC32FT(EKJ)
IC808	8-753-341-20	s	IC CXA3513R
IC900	8-759-675-54	s	IC TC7W53FK(TE85R)
IC901	8-759-669-66	s	IC TLC272CPWR-12
IC902	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC903	8-759-648-70	s	IC SN74LVC07APWR
IC904	8-752-075-38	s	IC CXA3053R
IC905	8-759-675-54	s	IC TC7W53FK(TE85R)
IC906	8-759-675-54	s	IC TC7W53FK(TE85R)
IC907	8-759-669-66	s	IC TLC272CPWR-12
IC908	8-752-075-38	s	IC CXA3053R
IC909	8-759-144-71	s	IC UPC311G2-E2
IC912	8-759-675-54	s	IC TC7W53FK(TE85R)
IC1003	8-759-337-40	s	IC NJM2904V(TE2)
IC1004	8-759-460-74	s	IC BA05FP-E2
IC1403	8-759-460-74	s	IC BA05FP-E2
IC1803	8-759-460-74	s	IC BA05FP-E2
IC2200	6-700-763-01	s	IC DS90CR287MTDX
IC2400	8-759-679-53	s	IC SN74LVC244APWR
IC2401	8-759-337-40	s	IC NJM2904V(TE2)
IC2404	6-701-990-01	s	IC SN74LVC257APWR
IC2405	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2601	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2604	8-759-573-97	s	IC SN74LVC541APWR
IC2605	8-759-573-97	s	IC SN74LVC541APWR

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC2606	6-700-763-01	s	IC DS90CR287MTDX
IC2607	8-759-573-97	s	IC SN74LVC541APWR
IC2608	8-759-573-97	s	IC SN74LVC541APWR
IC2900	8-759-679-53	s	IC SN74LVC244APWR
IC2901	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2903	8-759-337-40	s	IC NJM2904V(TE2)
IC2904	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC2905	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2906	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2907	6-710-021-01	s	IC CAT24C16WI-GT3
IC2908	6-710-021-01	s	IC CAT24C16WI-GT3
IC2909	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2910	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2911	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC2914	6-712-135-01	o	IC R1173H001D-T1-F
IC2915	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC2916	6-712-383-01	s	IC TC74VHC4051AFT(EK)
IC2917	6-712-383-01	s	IC TC74VHC4051AFT(EK)
IC2918	8-759-337-40	s	IC NJM2904V(TE2)
IC2919	8-759-337-40	s	IC NJM2904V(TE2)
IC2920	8-759-337-40	s	IC NJM2904V(TE2)
IC2921	8-759-337-40	s	IC NJM2904V(TE2)
IC2922	8-759-337-40	s	IC NJM2904V(TE2)
IC2925	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2926	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2927	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2928	8-759-675-54	s	IC TC7W53FK(TE85R)
L100	1-416-344-21	s	COIL, CHOKE 10UH
L101	1-469-529-21	s	INDUCTOR, (SMD) 10UH
L102	1-469-529-21	s	INDUCTOR, (SMD) 10UH
L103	1-416-344-21	s	COIL, CHOKE 10UH
L104	1-469-060-21	s	INDUCTOR
L105	1-469-060-21	s	INDUCTOR
L106	1-469-060-21	s	INDUCTOR
L600	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L601	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L602	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L603	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2200	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2201	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2202	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2203	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2204	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2205	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L2206	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
Q400	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q401	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q402	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q900	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q901	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q902	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q903	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q904	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q905	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q906	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q907	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q908	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q909	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q910	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q911	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q912	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q913	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q914	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q915	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q2900	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2901	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2902	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2903	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2904	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R101	1-208-935-81	s	RES, CHIP 100K (1005)
R102	1-208-935-81	s	RES, CHIP 100K (1005)
R104	1-208-935-81	s	RES, CHIP 100K (1005)
R105	1-208-863-81	s	RES, CHIP 100 (1005)
R106	1-208-863-81	s	RES, CHIP 100 (1005)
R107	1-208-855-81	s	RES, CHIP 47 (1005)
R108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R109	1-208-855-81	s	RES, CHIP 47 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-208-911-81	s	RES, CHIP 10K (1005)
R112	1-220-870-81	s	RES, CHIP 10 (1005)
R113	1-208-887-81	s	RES, CHIP 1.0K (1005)
R114	1-208-887-81	s	RES, CHIP 1.0K (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-220-870-81	s	RES, CHIP 10 (1005)
R119	1-220-870-81	s	RES, CHIP 10 (1005)
R120	1-220-870-81	s	RES, CHIP 10 (1005)
R121	1-220-870-81	s	RES, CHIP 10 (1005)
R122	1-220-870-81	s	RES, CHIP 10 (1005)
R123	1-220-870-81	s	RES, CHIP 10 (1005)
R124	1-220-870-81	s	RES, CHIP 10 (1005)
R125	1-220-870-81	s	RES, CHIP 10 (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-208-891-81	s	RES, CHIP 1.5K (1005)
R134	1-208-867-81	s	RES, CHIP 150 (1005)
R135	1-208-867-81	s	RES, CHIP 150 (1005)
R136	1-208-891-81	s	RES, CHIP 1.5K (1005)
R138	1-208-867-81	s	RES, CHIP 150 (1005)
R139	1-208-867-81	s	RES, CHIP 150 (1005)
R140	1-208-867-81	s	RES, CHIP 150 (1005)
R141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R142	1-208-867-81	s	RES, CHIP 150 (1005)
R143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-208-911-81	s	RES, CHIP 10K (1005)
R145	1-208-911-81	s	RES, CHIP 10K (1005)
R146	1-208-911-81	s	RES, CHIP 10K (1005)
R147	1-208-910-81	s	RES, CHIP 9.1K (1005)
R148	1-208-903-81	s	RES, CHIP 4.7K (1005)
R150	1-208-883-81	s	RES, CHIP 680 (1005)
R152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R154	1-208-911-81	s	RES, CHIP 10K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R157	1-208-891-81	s	RES, CHIP 1.5K (1005)
R159	1-208-867-81	s	RES, CHIP 150 (1005)
R160	1-208-867-81	s	RES, CHIP 150 (1005)
R161	1-208-867-81	s	RES, CHIP 150 (1005)
R162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R163	1-208-911-81	s	RES, CHIP 10K (1005)
R164	1-208-925-81	s	RES, CHIP 39K (1005)
R165	1-208-901-81	s	RES, CHIP 3.9K (1005)
R200	1-208-863-81	s	RES, CHIP 100 (1005)
R201	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R203	1-208-863-81	s	RES, CHIP 100 (1005)
R204	1-208-863-81	s	RES, CHIP 100 (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R208	1-220-878-81	s	RES, CHIP 22 (1005)
R209	1-220-878-81	s	RES, CHIP 22 (1005)
R210	1-220-878-81	s	RES, CHIP 22 (1005)
R211	1-220-878-81	s	RES, CHIP 22 (1005)
R212	1-220-878-81	s	RES, CHIP 22 (1005)
R213	1-220-878-81	s	RES, CHIP 22 (1005)
R214	1-220-878-81	s	RES, CHIP 22 (1005)
R215	1-220-878-81	s	RES, CHIP 22 (1005)
R216	1-220-878-81	s	RES, CHIP 22 (1005)
R217	1-220-878-81	s	RES, CHIP 22 (1005)
R218	1-220-878-81	s	RES, CHIP 22 (1005)
R219	1-220-878-81	s	RES, CHIP 22 (1005)
R220	1-220-878-81	s	RES, CHIP 22 (1005)
R221	1-220-878-81	s	RES, CHIP 22 (1005)
R222	1-220-878-81	s	RES, CHIP 22 (1005)
R223	1-220-878-81	s	RES, CHIP 22 (1005)
R224	1-220-878-81	s	RES, CHIP 22 (1005)
R225	1-220-878-81	s	RES, CHIP 22 (1005)
R226	1-220-878-81	s	RES, CHIP 22 (1005)
R227	1-220-878-81	s	RES, CHIP 22 (1005)
R228	1-220-878-81	s	RES, CHIP 22 (1005)
R229	1-220-870-81	s	RES, CHIP 10 (1005)
R230	1-208-887-81	s	RES, CHIP 1.0K (1005)
R231	1-208-887-81	s	RES, CHIP 1.0K (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R237	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-220-878-81	s	RES, CHIP 22 (1005)
R239	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-220-878-81	s	RES, CHIP 22 (1005)
R241	1-220-878-81	s	RES, CHIP 22 (1005)
R242	1-220-878-81	s	RES, CHIP 22 (1005)
R243	1-220-878-81	s	RES, CHIP 22 (1005)
R245	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R246	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R247	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R248	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R250	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R252	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R253	1-208-863-81	s	RES, CHIP 100 (1005)
R254	1-220-870-81	s	RES, CHIP 10 (1005)
R255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R257	1-220-878-81	s	RES, CHIP 22 (1005)
R258	1-220-878-81	s	RES, CHIP 22 (1005)
R259	1-220-878-81	s	RES, CHIP 22 (1005)
R260	1-220-878-81	s	RES, CHIP 22 (1005)
R261	1-220-878-81	s	RES, CHIP 22 (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R263	1-220-878-81	s	RES, CHIP 22 (1005)
R264	1-220-878-81	s	RES, CHIP 22 (1005)
R265	1-220-878-81	s	RES, CHIP 22 (1005)
R266	1-220-878-81	s	RES, CHIP 22 (1005)
R267	1-220-878-81	s	RES, CHIP 22 (1005)
R269	1-208-911-81	s	RES, CHIP 10K (1005)
R270	1-208-911-81	s	RES, CHIP 10K (1005)
R272	1-208-911-81	s	RES, CHIP 10K (1005)
R280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R281	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R283	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R288	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R291	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R292	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R296	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R297	1-208-887-81	s	RES, CHIP 1.0K (1005)
R298	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-220-878-81	s	RES, CHIP 22 (1005)
R308	1-220-878-81	s	RES, CHIP 22 (1005)
R309	1-220-878-81	s	RES, CHIP 22 (1005)
R310	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-220-878-81	s	RES, CHIP 22 (1005)
R312	1-220-878-81	s	RES, CHIP 22 (1005)
R313	1-220-878-81	s	RES, CHIP 22 (1005)
R314	1-220-878-81	s	RES, CHIP 22 (1005)
R315	1-220-878-81	s	RES, CHIP 22 (1005)
R316	1-220-878-81	s	RES, CHIP 22 (1005)
R317	1-220-878-81	s	RES, CHIP 22 (1005)
R318	1-220-878-81	s	RES, CHIP 22 (1005)
R319	1-220-878-81	s	RES, CHIP 22 (1005)
R320	1-220-878-81	s	RES, CHIP 22 (1005)
R321	1-220-878-81	s	RES, CHIP 22 (1005)
R322	1-220-878-81	s	RES, CHIP 22 (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-208-887-81	s	RES, CHIP 1.0K (1005)
R331	1-208-887-81	s	RES, CHIP 1.0K (1005)
R345	1-208-887-81	s	RES, CHIP 1.0K (1005)
R400	1-208-871-81	s	RES, CHIP 220 (1005)
R401	1-208-871-81	s	RES, CHIP 220 (1005)
R402	1-208-875-81	s	RES, CHIP 330 (1005)
R403	1-208-879-81	s	RES, CHIP 470 (1005)
R404	1-208-879-81	s	RES, CHIP 470 (1005)
R405	1-208-879-81	s	RES, CHIP 470 (1005)
R406	1-220-870-81	s	RES, CHIP 10 (1005)
R407	1-220-870-81	s	RES, CHIP 10 (1005)
R408	1-220-870-81	s	RES, CHIP 10 (1005)
R409	1-220-870-81	s	RES, CHIP 10 (1005)
R410	1-220-870-81	s	RES, CHIP 10 (1005)
R411	1-220-870-81	s	RES, CHIP 10 (1005)
R412	1-208-879-81	s	RES, CHIP 470 (1005)
R413	1-220-870-81	s	RES, CHIP 10 (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-208-911-81	s	RES, CHIP 10K (1005)
R418	1-208-863-81	s	RES, CHIP 100 (1005)
R419	1-208-863-81	s	RES, CHIP 100 (1005)
R420	1-208-863-81	s	RES, CHIP 100 (1005)
R421	1-208-863-81	s	RES, CHIP 100 (1005)
R422	1-220-870-81	s	RES, CHIP 10 (1005)
R423	1-220-870-81	s	RES, CHIP 10 (1005)
R425	1-220-870-81	s	RES, CHIP 10 (1005)
R426	1-220-870-81	s	RES, CHIP 10 (1005)
R427	1-220-870-81	s	RES, CHIP 10 (1005)
R428	1-220-870-81	s	RES, CHIP 10 (1005)
R429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-911-81	s	RES, CHIP 10K (1005)
R433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R434	1-220-870-81	s	RES, CHIP 10 (1005)
R435	1-220-870-81	s	RES, CHIP 10 (1005)
R436	1-220-870-81	s	RES, CHIP 10 (1005)
R437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R439	1-208-887-81	s	RES, CHIP 1.0K (1005)
R440	1-220-870-81	s	RES, CHIP 10 (1005)
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R444	1-208-887-81	s	RES, CHIP 1.0K (1005)
R445	1-220-870-81	s	RES, CHIP 10 (1005)
R446	1-220-870-81	s	RES, CHIP 10 (1005)
R447	1-220-870-81	s	RES, CHIP 10 (1005)
R448	1-220-870-81	s	RES, CHIP 10 (1005)
R449	1-220-870-81	s	RES, CHIP 10 (1005)
R450	1-220-870-81	s	RES, CHIP 10 (1005)
R451	1-220-870-81	s	RES, CHIP 10 (1005)
R452	1-220-870-81	s	RES, CHIP 10 (1005)
R453	1-220-870-81	s	RES, CHIP 10 (1005)
R454	1-220-870-81	s	RES, CHIP 10 (1005)
R455	1-220-870-81	s	RES, CHIP 10 (1005)
R456	1-220-870-81	s	RES, CHIP 10 (1005)
R457	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R458	1-220-870-81	s	RES, CHIP 10 (1005)
R459	1-220-870-81	s	RES, CHIP 10 (1005)
R460	1-220-870-81	s	RES, CHIP 10 (1005)
R461	1-220-870-81	s	RES, CHIP 10 (1005)
R462	1-220-870-81	s	RES, CHIP 10 (1005)
R463	1-220-870-81	s	RES, CHIP 10 (1005)
R464	1-220-870-81	s	RES, CHIP 10 (1005)
R465	1-220-870-81	s	RES, CHIP 10 (1005)
R466	1-220-870-81	s	RES, CHIP 10 (1005)
R467	1-220-870-81	s	RES, CHIP 10 (1005)
R468	1-220-870-81	s	RES, CHIP 10 (1005)
R469	1-220-870-81	s	RES, CHIP 10 (1005)
R470	1-220-870-81	s	RES, CHIP 10 (1005)
R471	1-220-870-81	s	RES, CHIP 10 (1005)
R472	1-220-870-81	s	RES, CHIP 10 (1005)
R473	1-220-870-81	s	RES, CHIP 10 (1005)
R474	1-220-870-81	s	RES, CHIP 10 (1005)
R475	1-220-870-81	s	RES, CHIP 10 (1005)
R476	1-220-870-81	s	RES, CHIP 10 (1005)
R477	1-220-870-81	s	RES, CHIP 10 (1005)
R478	1-220-870-81	s	RES, CHIP 10 (1005)
R479	1-208-911-81	s	RES, CHIP 10K (1005)
R480	1-208-911-81	s	RES, CHIP 10K (1005)
R481	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R482	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R483	1-220-870-81	s	RES, CHIP 10 (1005)
R484	1-220-870-81	s	RES, CHIP 10 (1005)
R485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R486	1-220-870-81	s	RES, CHIP 10 (1005)
R487	1-220-870-81	s	RES, CHIP 10 (1005)
R488	1-220-870-81	s	RES, CHIP 10 (1005)
R489	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R490	1-220-870-81	s	RES, CHIP 10 (1005)
R491	1-220-870-81	s	RES, CHIP 10 (1005)
R492	1-220-870-81	s	RES, CHIP 10 (1005)
R493	1-208-863-81	s	RES, CHIP 100 (1005)
R494	1-208-855-81	s	RES, CHIP 47 (1005)
R495	1-208-855-81	s	RES, CHIP 47 (1005)
R496	1-220-870-81	s	RES, CHIP 10 (1005)
R497	1-220-870-81	s	RES, CHIP 10 (1005)
R498	1-208-855-81	s	RES, CHIP 47 (1005)
R499	1-220-870-81	s	RES, CHIP 10 (1005)
R500	1-220-870-81	s	RES, CHIP 10 (1005)
R501	1-220-870-81	s	RES, CHIP 10 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-220-870-81	s	RES, CHIP 10 (1005)
R504	1-220-870-81	s	RES, CHIP 10 (1005)
R505	1-220-870-81	s	RES, CHIP 10 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-855-81	s	RES, CHIP 47 (1005)
R508	1-220-870-81	s	RES, CHIP 10 (1005)
R509	1-220-870-81	s	RES, CHIP 10 (1005)
R510	1-208-855-81	s	RES, CHIP 47 (1005)
R511	1-208-855-81	s	RES, CHIP 47 (1005)
R512	1-220-870-81	s	RES, CHIP 10 (1005)
R513	1-220-870-81	s	RES, CHIP 10 (1005)
R514	1-208-855-81	s	RES, CHIP 47 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R517	1-220-870-81	s	RES, CHIP 10 (1005)
R518	1-208-911-81	s	RES, CHIP 10K (1005)
R519	1-208-911-81	s	RES, CHIP 10K (1005)
R520	1-208-911-81	s	RES, CHIP 10K (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R522	1-208-911-81	s	RES, CHIP 10K (1005)
R523	1-208-871-81	s	RES, CHIP 220 (1005)
R524	1-220-870-81	s	RES, CHIP 10 (1005)
R525	1-220-870-81	s	RES, CHIP 10 (1005)
R526	1-220-870-81	s	RES, CHIP 10 (1005)
R527	1-220-870-81	s	RES, CHIP 10 (1005)
R528	1-220-870-81	s	RES, CHIP 10 (1005)
R529	1-220-870-81	s	RES, CHIP 10 (1005)
R530	1-208-863-81	s	RES, CHIP 100 (1005)
R531	1-220-870-81	s	RES, CHIP 10 (1005)
R532	1-220-870-81	s	RES, CHIP 10 (1005)
R533	1-220-870-81	s	RES, CHIP 10 (1005)
R534	1-220-870-81	s	RES, CHIP 10 (1005)
R535	1-220-870-81	s	RES, CHIP 10 (1005)
R536	1-220-870-81	s	RES, CHIP 10 (1005)
R537	1-220-870-81	s	RES, CHIP 10 (1005)
R538	1-220-870-81	s	RES, CHIP 10 (1005)
R539	1-220-870-81	s	RES, CHIP 10 (1005)
R540	1-220-870-81	s	RES, CHIP 10 (1005)
R541	1-220-870-81	s	RES, CHIP 10 (1005)
R542	1-220-870-81	s	RES, CHIP 10 (1005)
R543	1-220-870-81	s	RES, CHIP 10 (1005)
R544	1-220-870-81	s	RES, CHIP 10 (1005)
R545	1-220-870-81	s	RES, CHIP 10 (1005)
R546	1-220-870-81	s	RES, CHIP 10 (1005)
R547	1-220-870-81	s	RES, CHIP 10 (1005)
R548	1-220-870-81	s	RES, CHIP 10 (1005)
R549	1-220-870-81	s	RES, CHIP 10 (1005)
R550	1-220-870-81	s	RES, CHIP 10 (1005)
R551	1-220-870-81	s	RES, CHIP 10 (1005)
R552	1-220-870-81	s	RES, CHIP 10 (1005)
R553	1-208-871-81	s	RES, CHIP 220 (1005)
R554	1-208-887-81	s	RES, CHIP 1.0K (1005)
R555	1-220-870-81	s	RES, CHIP 10 (1005)
R556	1-220-870-81	s	RES, CHIP 10 (1005)
R557	1-220-870-81	s	RES, CHIP 10 (1005)
R558	1-220-870-81	s	RES, CHIP 10 (1005)
R559	1-220-870-81	s	RES, CHIP 10 (1005)
R560	1-220-870-81	s	RES, CHIP 10 (1005)
R561	1-220-870-81	s	RES, CHIP 10 (1005)
R562	1-220-870-81	s	RES, CHIP 10 (1005)
R563	1-220-870-81	s	RES, CHIP 10 (1005)
R564	1-208-911-81	s	RES, CHIP 10K (1005)
R565	1-208-911-81	s	RES, CHIP 10K (1005)
R566	1-208-911-81	s	RES, CHIP 10K (1005)
R567	1-208-911-81	s	RES, CHIP 10K (1005)
R568	1-208-911-81	s	RES, CHIP 10K (1005)
R569	1-208-911-81	s	RES, CHIP 10K (1005)
R570	1-208-911-81	s	RES, CHIP 10K (1005)
R571	1-208-911-81	s	RES, CHIP 10K (1005)
R572	1-208-911-81	s	RES, CHIP 10K (1005)
R575	1-220-870-81	s	RES, CHIP 10 (1005)
R576	1-220-870-81	s	RES, CHIP 10 (1005)
R577	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R578	1-220-870-81	s	RES, CHIP 10 (1005)
R581	1-208-911-81	s	RES, CHIP 10K (1005)
R600	1-208-911-81	s	RES, CHIP 10K (1005)
R601	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R605	1-208-911-81	s	RES, CHIP 10K (1005)
R606	1-208-911-81	s	RES, CHIP 10K (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-911-81	s	RES, CHIP 10K (1005)
R612	1-208-887-81	s	RES, CHIP 1.0K (1005)
R613	1-208-887-81	s	RES, CHIP 1.0K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R616	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-887-81	s	RES, CHIP 1.0K (1005)
R618	1-208-887-81	s	RES, CHIP 1.0K (1005)
R619	1-208-887-81	s	RES, CHIP 1.0K (1005)
R620	1-208-887-81	s	RES, CHIP 1.0K (1005)
R621	1-208-887-81	s	RES, CHIP 1.0K (1005)
R622	1-208-887-81	s	RES, CHIP 1.0K (1005)
R623	1-208-887-81	s	RES, CHIP 1.0K (1005)
R624	1-208-887-81	s	RES, CHIP 1.0K (1005)
R625	1-208-887-81	s	RES, CHIP 1.0K (1005)
R626	1-208-887-81	s	RES, CHIP 1.0K (1005)
R627	1-208-887-81	s	RES, CHIP 1.0K (1005)
R628	1-208-887-81	s	RES, CHIP 1.0K (1005)
R629	1-208-863-81	s	RES, CHIP 100 (1005)
R630	1-208-863-81	s	RES, CHIP 100 (1005)
R631	1-208-887-81	s	RES, CHIP 1.0K (1005)
R632	1-208-887-81	s	RES, CHIP 1.0K (1005)
R633	1-208-887-81	s	RES, CHIP 1.0K (1005)
R634	1-208-863-81	s	RES, CHIP 100 (1005)
R635	1-208-863-81	s	RES, CHIP 100 (1005)
R636	1-208-863-81	s	RES, CHIP 100 (1005)
R637	1-208-863-81	s	RES, CHIP 100 (1005)
R638	1-220-882-81	s	RES, CHIP 33 (1005)
R639	1-220-882-81	s	RES, CHIP 33 (1005)
R640	1-208-863-81	s	RES, CHIP 100 (1005)
R641	1-208-863-81	s	RES, CHIP 100 (1005)
R642	1-208-863-81	s	RES, CHIP 100 (1005)
R643	1-208-863-81	s	RES, CHIP 100 (1005)
R644	1-208-863-81	s	RES, CHIP 100 (1005)
R645	1-208-863-81	s	RES, CHIP 100 (1005)
R646	1-208-863-81	s	RES, CHIP 100 (1005)
R647	1-208-863-81	s	RES, CHIP 100 (1005)
R648	1-208-863-81	s	RES, CHIP 100 (1005)
R649	1-208-863-81	s	RES, CHIP 100 (1005)
R650	1-208-863-81	s	RES, CHIP 100 (1005)
R651	1-208-863-81	s	RES, CHIP 100 (1005)
R652	1-208-863-81	s	RES, CHIP 100 (1005)
R653	1-208-863-81	s	RES, CHIP 100 (1005)
R654	1-208-863-81	s	RES, CHIP 100 (1005)
R655	1-208-863-81	s	RES, CHIP 100 (1005)
R656	1-208-863-81	s	RES, CHIP 100 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R666	1-220-878-81	s	RES, CHIP 22 (1005)
R667	1-220-878-81	s	RES, CHIP 22 (1005)
R668	1-220-878-81	s	RES, CHIP 22 (1005)
R700	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R800	1-208-911-81	s	RES, CHIP 10K (1005)
R801	1-208-911-81	s	RES, CHIP 10K (1005)
R802	1-208-911-81	s	RES, CHIP 10K (1005)
R803	1-208-911-81	s	RES, CHIP 10K (1005)
R804	1-208-911-81	s	RES, CHIP 10K (1005)
R805	1-208-911-81	s	RES, CHIP 10K (1005)
R811	1-208-880-81	s	RES, CHIP 510 (1005)
R812	1-208-880-81	s	RES, CHIP 510 (1005)
R813	1-208-880-81	s	RES, CHIP 510 (1005)
R814	1-208-880-81	s	RES, CHIP 510 (1005)
R815	1-208-864-81	s	RES, CHIP 110 (1005)
R816	1-208-864-81	s	RES, CHIP 110 (1005)
R817	1-208-864-81	s	RES, CHIP 110 (1005)
R818	1-208-864-81	s	RES, CHIP 110 (1005)
R819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R821	1-208-865-81	s	RES, CHIP 120 (1005)
R822	1-208-887-81	s	RES, CHIP 1.0K (1005)
R823	1-208-887-81	s	RES, CHIP 1.0K (1005)
R824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R833	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R834	1-208-863-81	s	RES, CHIP 100 (1005)
R835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R839	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R840	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R841	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R842	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R845	1-208-887-81	s	RES, CHIP 1.0K (1005)
R846	1-208-887-81	s	RES, CHIP 1.0K (1005)
R848	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R849	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R850	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R851	1-208-887-81	s	RES, CHIP 1.0K (1005)
R852	1-208-887-81	s	RES, CHIP 1.0K (1005)
R853	1-208-887-81	s	RES, CHIP 1.0K (1005)
R854	1-208-887-81	s	RES, CHIP 1.0K (1005)
R855	1-208-903-81	s	RES, CHIP 4.7K (1005)
R856	1-208-903-81	s	RES, CHIP 4.7K (1005)
R857	1-208-903-81	s	RES, CHIP 4.7K (1005)
R858	1-208-903-81	s	RES, CHIP 4.7K (1005)
R859	1-208-903-81	s	RES, CHIP 4.7K (1005)
R860	1-208-903-81	s	RES, CHIP 4.7K (1005)
R861	1-208-887-81	s	RES, CHIP 1.0K (1005)
R862	1-208-887-81	s	RES, CHIP 1.0K (1005)
R863	1-208-887-81	s	RES, CHIP 1.0K (1005)
R864	1-208-911-81	s	RES, CHIP 10K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R865	1-208-911-81	s	RES, CHIP 10K (1005)
R866	1-208-911-81	s	RES, CHIP 10K (1005)
R870	1-208-880-81	s	RES, CHIP 510 (1005)
R871	1-208-880-81	s	RES, CHIP 510 (1005)
R872	1-208-864-81	s	RES, CHIP 110 (1005)
R873	1-208-864-81	s	RES, CHIP 110 (1005)
R874	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R875	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R878	1-208-865-81	s	RES, CHIP 120 (1005)
R879	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R880	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R883	1-208-887-81	s	RES, CHIP 1.0K (1005)
R884	1-208-887-81	s	RES, CHIP 1.0K (1005)
R885	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R890	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R891	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R892	1-208-863-81	s	RES, CHIP 100 (1005)
R893	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R894	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R896	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R897	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R900	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R901	1-208-911-81	s	RES, CHIP 10K (1005)
R902	1-208-911-81	s	RES, CHIP 10K (1005)
R903	1-208-903-81	s	RES, CHIP 4.7K (1005)
R904	1-208-920-81	s	RES, CHIP 24K (1005)
R905	1-208-911-81	s	RES, CHIP 10K (1005)
R906	1-208-918-81	s	RES, CHIP 20K (1005)
R907	1-208-887-81	s	RES, CHIP 1.0K (1005)
R908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R909	1-208-894-81	s	RES, CHIP 2.0K (1005)
R910	1-208-863-81	s	RES, CHIP 100 (1005)
R911	1-208-863-81	s	RES, CHIP 100 (1005)
R912	1-208-863-81	s	RES, CHIP 100 (1005)
R913	1-208-863-81	s	RES, CHIP 100 (1005)
R914	1-208-919-81	s	RES, CHIP 22K (1005)
R915	1-208-887-81	s	RES, CHIP 1.0K (1005)
R916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R917	1-208-887-81	s	RES, CHIP 1.0K (1005)
R918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R919	1-208-887-81	s	RES, CHIP 1.0K (1005)
R920	1-208-887-81	s	RES, CHIP 1.0K (1005)
R921	1-208-887-81	s	RES, CHIP 1.0K (1005)
R922	1-208-887-81	s	RES, CHIP 1.0K (1005)
R923	1-208-894-81	s	RES, CHIP 2.0K (1005)
R924	1-208-894-81	s	RES, CHIP 2.0K (1005)
R925	1-208-894-81	s	RES, CHIP 2.0K (1005)
R926	1-208-894-81	s	RES, CHIP 2.0K (1005)
R927	1-208-894-81	s	RES, CHIP 2.0K (1005)
R928	1-208-894-81	s	RES, CHIP 2.0K (1005)
R929	1-208-894-81	s	RES, CHIP 2.0K (1005)
R930	1-208-894-81	s	RES, CHIP 2.0K (1005)
R931	1-208-894-81	s	RES, CHIP 2.0K (1005)
R932	1-208-863-81	s	RES, CHIP 100 (1005)
R933	1-208-863-81	s	RES, CHIP 100 (1005)
R934	1-208-863-81	s	RES, CHIP 100 (1005)
R935	1-208-894-81	s	RES, CHIP 2.0K (1005)
R936	1-208-894-81	s	RES, CHIP 2.0K (1005)
R937	1-208-863-81	s	RES, CHIP 100 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R938	1-208-863-81	s	RES, CHIP 100 (1005)
R939	1-208-887-81	s	RES, CHIP 1.0K (1005)
R940	1-208-887-81	s	RES, CHIP 1.0K (1005)
R941	1-208-887-81	s	RES, CHIP 1.0K (1005)
R942	1-208-863-81	s	RES, CHIP 100 (1005)
R943	1-208-887-81	s	RES, CHIP 1.0K (1005)
R944	1-208-863-81	s	RES, CHIP 100 (1005)
R945	1-208-935-81	s	RES, CHIP 100K (1005)
R946	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R947	1-208-911-81	s	RES, CHIP 10K (1005)
R948	1-208-911-81	s	RES, CHIP 10K (1005)
R949	1-208-911-81	s	RES, CHIP 10K (1005)
R950	1-208-935-81	s	RES, CHIP 100K (1005)
R951	1-208-920-81	s	RES, CHIP 24K (1005)
R952	1-208-911-81	s	RES, CHIP 10K (1005)
R953	1-208-918-81	s	RES, CHIP 20K (1005)
R954	1-208-887-81	s	RES, CHIP 1.0K (1005)
R955	1-208-887-81	s	RES, CHIP 1.0K (1005)
R956	1-208-863-81	s	RES, CHIP 100 (1005)
R957	1-208-863-81	s	RES, CHIP 100 (1005)
R958	1-208-863-81	s	RES, CHIP 100 (1005)
R959	1-208-863-81	s	RES, CHIP 100 (1005)
R960	1-208-894-81	s	RES, CHIP 2.0K (1005)
R961	1-208-887-81	s	RES, CHIP 1.0K (1005)
R962	1-208-887-81	s	RES, CHIP 1.0K (1005)
R963	1-208-887-81	s	RES, CHIP 1.0K (1005)
R964	1-208-887-81	s	RES, CHIP 1.0K (1005)
R965	1-208-887-81	s	RES, CHIP 1.0K (1005)
R966	1-208-887-81	s	RES, CHIP 1.0K (1005)
R967	1-208-887-81	s	RES, CHIP 1.0K (1005)
R968	1-208-887-81	s	RES, CHIP 1.0K (1005)
R969	1-208-919-81	s	RES, CHIP 22K (1005)
R970	1-208-894-81	s	RES, CHIP 2.0K (1005)
R971	1-208-894-81	s	RES, CHIP 2.0K (1005)
R972	1-208-894-81	s	RES, CHIP 2.0K (1005)
R973	1-208-894-81	s	RES, CHIP 2.0K (1005)
R974	1-208-894-81	s	RES, CHIP 2.0K (1005)
R975	1-208-894-81	s	RES, CHIP 2.0K (1005)
R976	1-208-894-81	s	RES, CHIP 2.0K (1005)
R977	1-208-894-81	s	RES, CHIP 2.0K (1005)
R978	1-208-894-81	s	RES, CHIP 2.0K (1005)
R979	1-208-894-81	s	RES, CHIP 2.0K (1005)
R980	1-208-894-81	s	RES, CHIP 2.0K (1005)
R981	1-208-863-81	s	RES, CHIP 100 (1005)
R982	1-208-863-81	s	RES, CHIP 100 (1005)
R983	1-208-863-81	s	RES, CHIP 100 (1005)
R984	1-208-863-81	s	RES, CHIP 100 (1005)
R985	1-208-887-81	s	RES, CHIP 1.0K (1005)
R986	1-208-887-81	s	RES, CHIP 1.0K (1005)
R987	1-208-887-81	s	RES, CHIP 1.0K (1005)
R988	1-208-887-81	s	RES, CHIP 1.0K (1005)
R989	1-208-863-81	s	RES, CHIP 100 (1005)
R990	1-208-863-81	s	RES, CHIP 100 (1005)
R991	1-208-911-81	s	RES, CHIP 10K (1005)
R992	1-208-935-81	s	RES, CHIP 100K (1005)
R993	1-208-897-81	s	RES, CHIP 2.7K (1005)
R994	1-208-911-81	s	RES, CHIP 10K (1005)
R995	1-208-911-81	s	RES, CHIP 10K (1005)
R996	1-208-899-81	s	RES, CHIP 3.3K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R997	1-208-863-81	s	RES, CHIP 100 (1005)
R998	1-208-863-81	s	RES, CHIP 100 (1005)
R1000	1-208-855-81	s	RES, CHIP 47 (1005)
R1001	1-208-855-81	s	RES, CHIP 47 (1005)
R1002	1-208-863-81	s	RES, CHIP 100 (1005)
R1003	1-208-918-81	s	RES, CHIP 20K (1005)
R1004	1-208-879-81	s	RES, CHIP 470 (1005)
R1005	1-208-879-81	s	RES, CHIP 470 (1005)
R1006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-208-911-81	s	RES, CHIP 10K (1005)
R1011	1-208-911-81	s	RES, CHIP 10K (1005)
R1013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1016	1-208-922-81	s	RES, CHIP 30K (1005)
R1017	1-208-914-81	s	RES, CHIP 13K (1005)
R1018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1030	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1031	1-208-879-81	s	RES, CHIP 470 (1005)
R1032	1-208-911-81	s	RES, CHIP 10K (1005)
R1033	1-208-911-81	s	RES, CHIP 10K (1005)
R1034	1-208-911-81	s	RES, CHIP 10K (1005)
R1035	1-208-871-81	s	RES, CHIP 220 (1005)
R1036	1-208-871-81	s	RES, CHIP 220 (1005)
R1037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1039	1-208-863-81	s	RES, CHIP 100 (1005)
R1040	1-208-919-81	s	RES, CHIP 22K (1005)
R1041	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1042	1-208-855-81	s	RES, CHIP 47 (1005)
R1043	1-208-855-81	s	RES, CHIP 47 (1005)
R1044	1-208-863-81	s	RES, CHIP 100 (1005)
R1045	1-208-918-81	s	RES, CHIP 20K (1005)
R1046	1-208-879-81	s	RES, CHIP 470 (1005)
R1047	1-208-879-81	s	RES, CHIP 470 (1005)
R1048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1052	1-208-911-81	s	RES, CHIP 10K (1005)
R1053	1-208-911-81	s	RES, CHIP 10K (1005)
R1055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1058	1-208-922-81	s	RES, CHIP 30K (1005)
R1059	1-208-914-81	s	RES, CHIP 13K (1005)
R1060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1061	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1072	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1073	1-208-879-81	s	RES, CHIP 470 (1005)
R1074	1-208-911-81	s	RES, CHIP 10K (1005)
R1075	1-208-911-81	s	RES, CHIP 10K (1005)
R1076	1-208-911-81	s	RES, CHIP 10K (1005)
R1077	1-208-871-81	s	RES, CHIP 220 (1005)
R1078	1-208-871-81	s	RES, CHIP 220 (1005)
R1079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1081	1-208-863-81	s	RES, CHIP 100 (1005)
R1082	1-208-919-81	s	RES, CHIP 22K (1005)
R1083	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1084	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1085	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1086	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1087	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1088	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1089	1-220-878-81	s	RES, CHIP 22 (1005)
R1090	1-220-878-81	s	RES, CHIP 22 (1005)
R1091	1-220-878-81	s	RES, CHIP 22 (1005)
R1092	1-220-878-81	s	RES, CHIP 22 (1005)
R1093	1-220-878-81	s	RES, CHIP 22 (1005)
R1094	1-220-878-81	s	RES, CHIP 22 (1005)
R1095	1-220-878-81	s	RES, CHIP 22 (1005)
R1096	1-220-878-81	s	RES, CHIP 22 (1005)
R1097	1-220-878-81	s	RES, CHIP 22 (1005)
R1098	1-220-878-81	s	RES, CHIP 22 (1005)
R1099	1-220-878-81	s	RES, CHIP 22 (1005)
R1100	1-220-878-81	s	RES, CHIP 22 (1005)
R1101	1-220-878-81	s	RES, CHIP 22 (1005)
R1102	1-220-878-81	s	RES, CHIP 22 (1005)
R1103	1-220-878-81	s	RES, CHIP 22 (1005)
R1104	1-220-878-81	s	RES, CHIP 22 (1005)
R1105	1-220-878-81	s	RES, CHIP 22 (1005)
R1106	1-220-878-81	s	RES, CHIP 22 (1005)
R1107	1-220-878-81	s	RES, CHIP 22 (1005)
R1108	1-220-878-81	s	RES, CHIP 22 (1005)
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-863-81	s	RES, CHIP 100 (1005)
R1203	1-208-918-81	s	RES, CHIP 20K (1005)
R1204	1-208-879-81	s	RES, CHIP 470 (1005)
R1205	1-208-879-81	s	RES, CHIP 470 (1005)
R1206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1210	1-208-911-81	s	RES, CHIP 10K (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1216	1-208-922-81	s	RES, CHIP 30K (1005)
R1217	1-208-914-81	s	RES, CHIP 13K (1005)
R1218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1223	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1230	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1231	1-208-879-81	s	RES, CHIP 470 (1005)
R1232	1-208-911-81	s	RES, CHIP 10K (1005)
R1233	1-208-911-81	s	RES, CHIP 10K (1005)
R1234	1-208-911-81	s	RES, CHIP 10K (1005)
R1235	1-208-871-81	s	RES, CHIP 220 (1005)
R1236	1-208-871-81	s	RES, CHIP 220 (1005)
R1237	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1238	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1239	1-208-863-81	s	RES, CHIP 100 (1005)
R1240	1-208-919-81	s	RES, CHIP 22K (1005)
R1241	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1242	1-208-855-81	s	RES, CHIP 47 (1005)
R1243	1-208-855-81	s	RES, CHIP 47 (1005)
R1244	1-208-863-81	s	RES, CHIP 100 (1005)
R1245	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1246	1-208-918-81	s	RES, CHIP 20K (1005)
R1247	1-208-879-81	s	RES, CHIP 470 (1005)
R1248	1-208-879-81	s	RES, CHIP 470 (1005)
R1249	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1250	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1251	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1252	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1253	1-208-911-81	s	RES, CHIP 10K (1005)
R1254	1-208-911-81	s	RES, CHIP 10K (1005)
R1256	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1257	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1259	1-208-922-81	s	RES, CHIP 30K (1005)
R1260	1-208-914-81	s	RES, CHIP 13K (1005)
R1261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1263	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1264	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1265	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1266	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1268	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1269	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1270	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1271	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1272	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1274	1-208-879-81	s	RES, CHIP 470 (1005)
R1275	1-208-911-81	s	RES, CHIP 10K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1276	1-208-911-81	s	RES, CHIP 10K (1005)
R1277	1-208-911-81	s	RES, CHIP 10K (1005)
R1278	1-208-871-81	s	RES, CHIP 220 (1005)
R1279	1-208-871-81	s	RES, CHIP 220 (1005)
R1280	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1281	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1282	1-208-863-81	s	RES, CHIP 100 (1005)
R1283	1-208-919-81	s	RES, CHIP 22K (1005)
R1284	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1287	1-208-875-81	s	RES, CHIP 330 (1005)
R1288	1-220-878-81	s	RES, CHIP 22 (1005)
R1289	1-220-878-81	s	RES, CHIP 22 (1005)
R1290	1-220-878-81	s	RES, CHIP 22 (1005)
R1291	1-220-878-81	s	RES, CHIP 22 (1005)
R1292	1-220-878-81	s	RES, CHIP 22 (1005)
R1293	1-220-878-81	s	RES, CHIP 22 (1005)
R1294	1-220-878-81	s	RES, CHIP 22 (1005)
R1295	1-220-878-81	s	RES, CHIP 22 (1005)
R1296	1-220-878-81	s	RES, CHIP 22 (1005)
R1297	1-220-878-81	s	RES, CHIP 22 (1005)
R1298	1-220-878-81	s	RES, CHIP 22 (1005)
R1299	1-220-878-81	s	RES, CHIP 22 (1005)
R1300	1-220-878-81	s	RES, CHIP 22 (1005)
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1302	1-220-878-81	s	RES, CHIP 22 (1005)
R1303	1-220-878-81	s	RES, CHIP 22 (1005)
R1400	1-208-855-81	s	RES, CHIP 47 (1005)
R1401	1-208-855-81	s	RES, CHIP 47 (1005)
R1402	1-208-863-81	s	RES, CHIP 100 (1005)
R1403	1-208-918-81	s	RES, CHIP 20K (1005)
R1404	1-208-879-81	s	RES, CHIP 470 (1005)
R1405	1-208-879-81	s	RES, CHIP 470 (1005)
R1406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1410	1-208-911-81	s	RES, CHIP 10K (1005)
R1411	1-208-911-81	s	RES, CHIP 10K (1005)
R1414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1416	1-208-922-81	s	RES, CHIP 30K (1005)
R1417	1-208-914-81	s	RES, CHIP 13K (1005)
R1418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1428	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1430	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1431	1-208-879-81	s	RES, CHIP 470 (1005)
R1432	1-208-911-81	s	RES, CHIP 10K (1005)
R1433	1-208-911-81	s	RES, CHIP 10K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1434	1-208-911-81	s	RES, CHIP 10K (1005)
R1435	1-208-871-81	s	RES, CHIP 220 (1005)
R1436	1-208-871-81	s	RES, CHIP 220 (1005)
R1437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1439	1-208-863-81	s	RES, CHIP 100 (1005)
R1440	1-208-919-81	s	RES, CHIP 22K (1005)
R1441	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1442	1-208-855-81	s	RES, CHIP 47 (1005)
R1443	1-208-855-81	s	RES, CHIP 47 (1005)
R1444	1-208-863-81	s	RES, CHIP 100 (1005)
R1445	1-208-918-81	s	RES, CHIP 20K (1005)
R1446	1-208-879-81	s	RES, CHIP 470 (1005)
R1447	1-208-879-81	s	RES, CHIP 470 (1005)
R1448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1449	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1452	1-208-911-81	s	RES, CHIP 10K (1005)
R1453	1-208-911-81	s	RES, CHIP 10K (1005)
R1458	1-208-922-81	s	RES, CHIP 30K (1005)
R1459	1-208-914-81	s	RES, CHIP 13K (1005)
R1460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1466	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1469	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1471	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1472	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1473	1-208-879-81	s	RES, CHIP 470 (1005)
R1474	1-208-911-81	s	RES, CHIP 10K (1005)
R1475	1-208-911-81	s	RES, CHIP 10K (1005)
R1476	1-208-911-81	s	RES, CHIP 10K (1005)
R1477	1-208-871-81	s	RES, CHIP 220 (1005)
R1478	1-208-871-81	s	RES, CHIP 220 (1005)
R1479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1480	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1481	1-208-863-81	s	RES, CHIP 100 (1005)
R1482	1-208-919-81	s	RES, CHIP 22K (1005)
R1483	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1484	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1486	1-220-878-81	s	RES, CHIP 22 (1005)
R1487	1-220-878-81	s	RES, CHIP 22 (1005)
R1488	1-220-878-81	s	RES, CHIP 22 (1005)
R1489	1-220-878-81	s	RES, CHIP 22 (1005)
R1490	1-220-878-81	s	RES, CHIP 22 (1005)
R1491	1-220-878-81	s	RES, CHIP 22 (1005)
R1492	1-220-878-81	s	RES, CHIP 22 (1005)
R1493	1-220-878-81	s	RES, CHIP 22 (1005)
R1494	1-220-878-81	s	RES, CHIP 22 (1005)
R1495	1-220-878-81	s	RES, CHIP 22 (1005)
R1496	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1497	1-220-878-81	s	RES, CHIP 22 (1005)
R1498	1-220-878-81	s	RES, CHIP 22 (1005)
R1499	1-220-878-81	s	RES, CHIP 22 (1005)
R1500	1-220-878-81	s	RES, CHIP 22 (1005)
R1501	1-220-878-81	s	RES, CHIP 22 (1005)
R1502	1-220-878-81	s	RES, CHIP 22 (1005)
R1503	1-220-878-81	s	RES, CHIP 22 (1005)
R1504	1-220-878-81	s	RES, CHIP 22 (1005)
R1505	1-220-878-81	s	RES, CHIP 22 (1005)
R1506	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1600	1-208-855-81	s	RES, CHIP 47 (1005)
R1601	1-208-855-81	s	RES, CHIP 47 (1005)
R1602	1-208-863-81	s	RES, CHIP 100 (1005)
R1603	1-208-918-81	s	RES, CHIP 20K (1005)
R1604	1-208-879-81	s	RES, CHIP 470 (1005)
R1605	1-208-879-81	s	RES, CHIP 470 (1005)
R1606	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1607	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1608	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1609	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1616	1-208-922-81	s	RES, CHIP 30K (1005)
R1617	1-208-914-81	s	RES, CHIP 13K (1005)
R1618	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1619	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1620	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1621	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1623	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1624	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1625	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1628	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1629	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1630	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1631	1-208-879-81	s	RES, CHIP 470 (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-911-81	s	RES, CHIP 10K (1005)
R1634	1-208-911-81	s	RES, CHIP 10K (1005)
R1635	1-208-871-81	s	RES, CHIP 220 (1005)
R1636	1-208-871-81	s	RES, CHIP 220 (1005)
R1637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1639	1-208-863-81	s	RES, CHIP 100 (1005)
R1640	1-208-919-81	s	RES, CHIP 22K (1005)
R1641	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1642	1-208-855-81	s	RES, CHIP 47 (1005)
R1643	1-208-855-81	s	RES, CHIP 47 (1005)
R1644	1-208-863-81	s	RES, CHIP 100 (1005)
R1645	1-208-918-81	s	RES, CHIP 20K (1005)
R1646	1-208-879-81	s	RES, CHIP 470 (1005)
R1647	1-208-879-81	s	RES, CHIP 470 (1005)
R1648	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1649	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1650	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1651	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1657	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1658	1-208-922-81	s	RES, CHIP 30K (1005)
R1659	1-208-914-81	s	RES, CHIP 13K (1005)
R1660	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1662	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1663	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1664	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1665	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1666	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1669	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1670	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1672	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1673	1-208-879-81	s	RES, CHIP 470 (1005)
R1674	1-208-911-81	s	RES, CHIP 10K (1005)
R1675	1-208-911-81	s	RES, CHIP 10K (1005)
R1676	1-208-911-81	s	RES, CHIP 10K (1005)
R1677	1-208-871-81	s	RES, CHIP 220 (1005)
R1678	1-208-871-81	s	RES, CHIP 220 (1005)
R1679	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1680	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1681	1-208-863-81	s	RES, CHIP 100 (1005)
R1682	1-208-919-81	s	RES, CHIP 22K (1005)
R1683	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1684	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1685	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1686	1-208-875-81	s	RES, CHIP 330 (1005)
R1687	1-220-878-81	s	RES, CHIP 22 (1005)
R1688	1-220-878-81	s	RES, CHIP 22 (1005)
R1689	1-220-878-81	s	RES, CHIP 22 (1005)
R1690	1-220-878-81	s	RES, CHIP 22 (1005)
R1691	1-220-878-81	s	RES, CHIP 22 (1005)
R1692	1-220-878-81	s	RES, CHIP 22 (1005)
R1693	1-220-878-81	s	RES, CHIP 22 (1005)
R1694	1-220-878-81	s	RES, CHIP 22 (1005)
R1695	1-220-878-81	s	RES, CHIP 22 (1005)
R1696	1-220-878-81	s	RES, CHIP 22 (1005)
R1697	1-220-878-81	s	RES, CHIP 22 (1005)
R1698	1-220-878-81	s	RES, CHIP 22 (1005)
R1699	1-220-878-81	s	RES, CHIP 22 (1005)
R1700	1-220-878-81	s	RES, CHIP 22 (1005)
R1701	1-220-878-81	s	RES, CHIP 22 (1005)
R1702	1-220-878-81	s	RES, CHIP 22 (1005)
R1703	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1800	1-208-855-81	s	RES, CHIP 47 (1005)
R1801	1-208-855-81	s	RES, CHIP 47 (1005)
R1802	1-208-863-81	s	RES, CHIP 100 (1005)
R1803	1-208-918-81	s	RES, CHIP 20K (1005)
R1804	1-208-879-81	s	RES, CHIP 470 (1005)
R1805	1-208-879-81	s	RES, CHIP 470 (1005)
R1806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1808	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1810	1-208-911-81	s	RES, CHIP 10K (1005)
R1811	1-208-911-81	s	RES, CHIP 10K (1005)
R1813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1816	1-208-922-81	s	RES, CHIP 30K (1005)
R1817	1-208-914-81	s	RES, CHIP 13K (1005)
R1818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1830	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1831	1-208-879-81	s	RES, CHIP 470 (1005)
R1832	1-208-911-81	s	RES, CHIP 10K (1005)
R1833	1-208-911-81	s	RES, CHIP 10K (1005)
R1834	1-208-911-81	s	RES, CHIP 10K (1005)
R1835	1-208-871-81	s	RES, CHIP 220 (1005)
R1836	1-208-871-81	s	RES, CHIP 220 (1005)
R1837	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1838	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1839	1-208-863-81	s	RES, CHIP 100 (1005)
R1840	1-208-919-81	s	RES, CHIP 22K (1005)
R1841	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1842	1-208-855-81	s	RES, CHIP 47 (1005)
R1843	1-208-855-81	s	RES, CHIP 47 (1005)
R1844	1-208-863-81	s	RES, CHIP 100 (1005)
R1845	1-208-918-81	s	RES, CHIP 20K (1005)
R1846	1-208-879-81	s	RES, CHIP 470 (1005)
R1847	1-208-879-81	s	RES, CHIP 470 (1005)
R1848	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1849	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1850	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1851	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1852	1-208-911-81	s	RES, CHIP 10K (1005)
R1853	1-208-911-81	s	RES, CHIP 10K (1005)
R1855	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1857	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1858	1-208-922-81	s	RES, CHIP 30K (1005)
R1859	1-208-914-81	s	RES, CHIP 13K (1005)
R1860	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1861	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1862	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1863	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1864	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1865	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1866	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1867	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1868	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1869	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1870	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1871	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1872	1-208-887-81	s	RES, CHIP 1.0K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1873	1-208-879-81	s	RES, CHIP 470 (1005)
R1874	1-208-911-81	s	RES, CHIP 10K (1005)
R1875	1-208-911-81	s	RES, CHIP 10K (1005)
R1876	1-208-911-81	s	RES, CHIP 10K (1005)
R1877	1-208-871-81	s	RES, CHIP 220 (1005)
R1878	1-208-871-81	s	RES, CHIP 220 (1005)
R1879	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1880	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1881	1-208-863-81	s	RES, CHIP 100 (1005)
R1882	1-208-919-81	s	RES, CHIP 22K (1005)
R1883	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1884	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1885	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1886	1-220-878-81	s	RES, CHIP 22 (1005)
R1887	1-220-878-81	s	RES, CHIP 22 (1005)
R1888	1-220-878-81	s	RES, CHIP 22 (1005)
R1889	1-220-878-81	s	RES, CHIP 22 (1005)
R1890	1-220-878-81	s	RES, CHIP 22 (1005)
R1891	1-220-878-81	s	RES, CHIP 22 (1005)
R1892	1-220-878-81	s	RES, CHIP 22 (1005)
R1893	1-220-878-81	s	RES, CHIP 22 (1005)
R1894	1-220-878-81	s	RES, CHIP 22 (1005)
R1895	1-220-878-81	s	RES, CHIP 22 (1005)
R1896	1-220-878-81	s	RES, CHIP 22 (1005)
R1897	1-220-878-81	s	RES, CHIP 22 (1005)
R1898	1-220-878-81	s	RES, CHIP 22 (1005)
R1899	1-220-878-81	s	RES, CHIP 22 (1005)
R1900	1-220-878-81	s	RES, CHIP 22 (1005)
R1901	1-220-878-81	s	RES, CHIP 22 (1005)
R1902	1-220-878-81	s	RES, CHIP 22 (1005)
R1903	1-220-878-81	s	RES, CHIP 22 (1005)
R1904	1-220-878-81	s	RES, CHIP 22 (1005)
R1905	1-220-878-81	s	RES, CHIP 22 (1005)
R1906	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1907	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2000	1-208-855-81	s	RES, CHIP 47 (1005)
R2001	1-208-855-81	s	RES, CHIP 47 (1005)
R2002	1-208-863-81	s	RES, CHIP 100 (1005)
R2003	1-208-918-81	s	RES, CHIP 20K (1005)
R2004	1-208-879-81	s	RES, CHIP 470 (1005)
R2005	1-208-879-81	s	RES, CHIP 470 (1005)
R2006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2010	1-208-911-81	s	RES, CHIP 10K (1005)
R2011	1-208-911-81	s	RES, CHIP 10K (1005)
R2015	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2016	1-208-922-81	s	RES, CHIP 30K (1005)
R2017	1-208-914-81	s	RES, CHIP 13K (1005)
R2018	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2026	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2030	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2031	1-208-879-81	s	RES, CHIP 470 (1005)
R2032	1-208-911-81	s	RES, CHIP 10K (1005)
R2033	1-208-911-81	s	RES, CHIP 10K (1005)
R2034	1-208-911-81	s	RES, CHIP 10K (1005)
R2035	1-208-871-81	s	RES, CHIP 220 (1005)
R2036	1-208-871-81	s	RES, CHIP 220 (1005)
R2037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-208-863-81	s	RES, CHIP 100 (1005)
R2040	1-208-919-81	s	RES, CHIP 22K (1005)
R2041	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2042	1-208-855-81	s	RES, CHIP 47 (1005)
R2043	1-208-855-81	s	RES, CHIP 47 (1005)
R2044	1-208-863-81	s	RES, CHIP 100 (1005)
R2045	1-208-918-81	s	RES, CHIP 20K (1005)
R2046	1-208-879-81	s	RES, CHIP 470 (1005)
R2047	1-208-879-81	s	RES, CHIP 470 (1005)
R2048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2052	1-208-911-81	s	RES, CHIP 10K (1005)
R2053	1-208-911-81	s	RES, CHIP 10K (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-208-922-81	s	RES, CHIP 30K (1005)
R2059	1-208-914-81	s	RES, CHIP 13K (1005)
R2060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2072	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2073	1-208-879-81	s	RES, CHIP 470 (1005)
R2074	1-208-911-81	s	RES, CHIP 10K (1005)
R2075	1-208-911-81	s	RES, CHIP 10K (1005)
R2076	1-208-911-81	s	RES, CHIP 10K (1005)
R2077	1-208-871-81	s	RES, CHIP 220 (1005)
R2078	1-208-871-81	s	RES, CHIP 220 (1005)
R2079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2081	1-208-863-81	s	RES, CHIP 100 (1005)
R2082	1-208-919-81	s	RES, CHIP 22K (1005)
R2083	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2084	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2085	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2086	1-208-875-81	s	RES, CHIP 330 (1005)
R2087	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2088	1-220-878-81	s	RES, CHIP 22 (1005)
R2089	1-220-878-81	s	RES, CHIP 22 (1005)
R2090	1-220-878-81	s	RES, CHIP 22 (1005)
R2091	1-220-878-81	s	RES, CHIP 22 (1005)
R2092	1-220-878-81	s	RES, CHIP 22 (1005)
R2093	1-220-878-81	s	RES, CHIP 22 (1005)
R2094	1-220-878-81	s	RES, CHIP 22 (1005)
R2095	1-220-878-81	s	RES, CHIP 22 (1005)
R2096	1-220-878-81	s	RES, CHIP 22 (1005)
R2097	1-220-878-81	s	RES, CHIP 22 (1005)
R2098	1-220-878-81	s	RES, CHIP 22 (1005)
R2099	1-220-878-81	s	RES, CHIP 22 (1005)
R2100	1-220-878-81	s	RES, CHIP 22 (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2102	1-220-878-81	s	RES, CHIP 22 (1005)
R2103	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2200	1-208-879-81	s	RES, CHIP 470 (1005)
R2201	1-208-911-81	s	RES, CHIP 10K (1005)
R2202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2213	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2214	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2219	1-208-911-81	s	RES, CHIP 10K (1005)
R2220	1-208-911-81	s	RES, CHIP 10K (1005)
R2221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2224	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2225	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2232	1-220-870-81	s	RES, CHIP 10 (1005)
R2233	1-220-870-81	s	RES, CHIP 10 (1005)
R2234	1-220-870-81	s	RES, CHIP 10 (1005)
R2235	1-220-870-81	s	RES, CHIP 10 (1005)
R2236	1-220-870-81	s	RES, CHIP 10 (1005)
R2237	1-220-870-81	s	RES, CHIP 10 (1005)
R2238	1-220-870-81	s	RES, CHIP 10 (1005)
R2239	1-220-870-81	s	RES, CHIP 10 (1005)
R2240	1-220-870-81	s	RES, CHIP 10 (1005)
R2241	1-220-870-81	s	RES, CHIP 10 (1005)
R2242	1-220-870-81	s	RES, CHIP 10 (1005)
R2243	1-220-870-81	s	RES, CHIP 10 (1005)
R2244	1-220-870-81	s	RES, CHIP 10 (1005)
R2245	1-220-870-81	s	RES, CHIP 10 (1005)
R2246	1-220-870-81	s	RES, CHIP 10 (1005)
R2247	1-220-870-81	s	RES, CHIP 10 (1005)
R2248	1-220-870-81	s	RES, CHIP 10 (1005)
R2249	1-220-870-81	s	RES, CHIP 10 (1005)
R2250	1-220-870-81	s	RES, CHIP 10 (1005)
R2251	1-220-870-81	s	RES, CHIP 10 (1005)
R2253	1-220-870-81	s	RES, CHIP 10 (1005)
R2254	1-220-870-81	s	RES, CHIP 10 (1005)
R2255	1-220-870-81	s	RES, CHIP 10 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2256	1-220-878-81	s	RES, CHIP 22 (1005)
R2257	1-220-870-81	s	RES, CHIP 10 (1005)
R2258	1-220-878-81	s	RES, CHIP 22 (1005)
R2259	1-220-870-81	s	RES, CHIP 10 (1005)
R2260	1-220-878-81	s	RES, CHIP 22 (1005)
R2261	1-220-870-81	s	RES, CHIP 10 (1005)
R2262	1-220-878-81	s	RES, CHIP 22 (1005)
R2263	1-220-870-81	s	RES, CHIP 10 (1005)
R2264	1-220-870-81	s	RES, CHIP 10 (1005)
R2265	1-220-870-81	s	RES, CHIP 10 (1005)
R2266	1-220-870-81	s	RES, CHIP 10 (1005)
R2267	1-220-870-81	s	RES, CHIP 10 (1005)
R2268	1-208-911-81	s	RES, CHIP 10K (1005)
R2400	1-208-911-81	s	RES, CHIP 10K (1005)
R2401	1-208-911-81	s	RES, CHIP 10K (1005)
R2402	1-208-911-81	s	RES, CHIP 10K (1005)
R2403	1-208-911-81	s	RES, CHIP 10K (1005)
R2404	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2405	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2406	1-208-943-81	s	RES, CHIP 220K (1005)
R2407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2425	1-208-923-81	s	RES, CHIP 33K (1005)
R2426	1-208-923-81	s	RES, CHIP 33K (1005)
R2427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2428	1-220-878-81	s	RES, CHIP 22 (1005)
R2429	1-208-943-81	s	RES, CHIP 220K (1005)
R2430	1-220-878-81	s	RES, CHIP 22 (1005)
R2434	1-208-929-81	s	RES, CHIP 56K (1005)
R2436	1-208-929-81	s	RES, CHIP 56K (1005)
R2438	1-208-943-81	s	RES, CHIP 220K (1005)
R2451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2452	1-208-923-81	s	RES, CHIP 33K (1005)
R2453	1-208-923-81	s	RES, CHIP 33K (1005)
R2454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2456	1-208-943-81	s	RES, CHIP 220K (1005)
R2459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2467	1-208-929-81	s	RES, CHIP 56K (1005)
R2468	1-208-929-81	s	RES, CHIP 56K (1005)
R2470	1-208-929-81	s	RES, CHIP 56K (1005)
R2471	1-208-929-81	s	RES, CHIP 56K (1005)
R2473	1-208-929-81	s	RES, CHIP 56K (1005)
R2474	1-208-929-81	s	RES, CHIP 56K (1005)
R2475	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2476	1-208-943-81	s	RES, CHIP 220K (1005)
R2477	1-208-923-81	s	RES, CHIP 33K (1005)
R2478	1-208-923-81	s	RES, CHIP 33K (1005)
R2491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2492	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2494	1-208-943-81	s	RES, CHIP 220K (1005)
R2501	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2502	1-220-878-81	s	RES, CHIP 22 (1005)
R2503	1-220-878-81	s	RES, CHIP 22 (1005)
R2504	1-220-878-81	s	RES, CHIP 22 (1005)
R2505	1-208-879-81	s	RES, CHIP 470 (1005)
R2506	1-208-879-81	s	RES, CHIP 470 (1005)
R2507	1-208-879-81	s	RES, CHIP 470 (1005)
R2508	1-208-879-81	s	RES, CHIP 470 (1005)
R2509	1-208-879-81	s	RES, CHIP 470 (1005)
R2510	1-208-879-81	s	RES, CHIP 470 (1005)
R2511	1-208-879-81	s	RES, CHIP 470 (1005)
R2512	1-208-879-81	s	RES, CHIP 470 (1005)
R2513	1-208-879-81	s	RES, CHIP 470 (1005)
R2514	1-208-879-81	s	RES, CHIP 470 (1005)
R2515	1-208-879-81	s	RES, CHIP 470 (1005)
R2516	1-208-879-81	s	RES, CHIP 470 (1005)
R2600	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2601	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2602	1-220-878-81	s	RES, CHIP 22 (1005)
R2603	1-220-878-81	s	RES, CHIP 22 (1005)
R2604	1-220-878-81	s	RES, CHIP 22 (1005)
R2605	1-220-878-81	s	RES, CHIP 22 (1005)
R2606	1-220-878-81	s	RES, CHIP 22 (1005)
R2607	1-220-878-81	s	RES, CHIP 22 (1005)
R2608	1-220-878-81	s	RES, CHIP 22 (1005)
R2609	1-220-878-81	s	RES, CHIP 22 (1005)
R2610	1-220-878-81	s	RES, CHIP 22 (1005)
R2611	1-220-878-81	s	RES, CHIP 22 (1005)
R2612	1-220-878-81	s	RES, CHIP 22 (1005)
R2613	1-220-878-81	s	RES, CHIP 22 (1005)
R2614	1-220-878-81	s	RES, CHIP 22 (1005)
R2615	1-220-878-81	s	RES, CHIP 22 (1005)
R2616	1-220-878-81	s	RES, CHIP 22 (1005)
R2617	1-220-878-81	s	RES, CHIP 22 (1005)
R2618	1-220-878-81	s	RES, CHIP 22 (1005)
R2619	1-220-878-81	s	RES, CHIP 22 (1005)
R2620	1-220-878-81	s	RES, CHIP 22 (1005)
R2621	1-220-878-81	s	RES, CHIP 22 (1005)
R2622	1-220-878-81	s	RES, CHIP 22 (1005)
R2624	1-208-911-81	s	RES, CHIP 10K (1005)
R2625	1-208-911-81	s	RES, CHIP 10K (1005)
R2626	1-208-911-81	s	RES, CHIP 10K (1005)
R2635	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2636	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2637	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2638	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2639	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2640	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2641	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2642	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2643	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2644	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2645	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2646	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2647	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2648	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2649	1-220-878-81	s	RES, CHIP 22 (1005)
R2650	1-220-878-81	s	RES, CHIP 22 (1005)
R2651	1-220-878-81	s	RES, CHIP 22 (1005)
R2652	1-220-878-81	s	RES, CHIP 22 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2653	1-220-878-81	s	RES, CHIP 22 (1005)
R2654	1-220-878-81	s	RES, CHIP 22 (1005)
R2655	1-220-878-81	s	RES, CHIP 22 (1005)
R2656	1-220-878-81	s	RES, CHIP 22 (1005)
R2657	1-220-878-81	s	RES, CHIP 22 (1005)
R2658	1-220-878-81	s	RES, CHIP 22 (1005)
R2659	1-220-878-81	s	RES, CHIP 22 (1005)
R2660	1-220-878-81	s	RES, CHIP 22 (1005)
R2661	1-220-878-81	s	RES, CHIP 22 (1005)
R2662	1-220-878-81	s	RES, CHIP 22 (1005)
R2663	1-220-878-81	s	RES, CHIP 22 (1005)
R2664	1-220-878-81	s	RES, CHIP 22 (1005)
R2665	1-220-878-81	s	RES, CHIP 22 (1005)
R2666	1-220-878-81	s	RES, CHIP 22 (1005)
R2667	1-220-878-81	s	RES, CHIP 22 (1005)
R2668	1-220-878-81	s	RES, CHIP 22 (1005)
R2669	1-220-878-81	s	RES, CHIP 22 (1005)
R2670	1-220-878-81	s	RES, CHIP 22 (1005)
R2671	1-220-878-81	s	RES, CHIP 22 (1005)
R2672	1-220-878-81	s	RES, CHIP 22 (1005)
R2673	1-220-878-81	s	RES, CHIP 22 (1005)
R2674	1-220-878-81	s	RES, CHIP 22 (1005)
R2675	1-220-878-81	s	RES, CHIP 22 (1005)
R2676	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2677	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2678	1-208-911-81	s	RES, CHIP 10K (1005)
R2679	1-208-915-81	s	RES, CHIP 15K (1005)
R2680	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2681	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2682	1-208-913-81	s	RES, CHIP 12K (1005)
R2683	1-208-879-81	s	RES, CHIP 470 (1005)
R2684	1-208-911-81	s	RES, CHIP 10K (1005)
R2685	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2691	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2695	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2800	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2807	1-220-878-81	s	RES, CHIP 22 (1005)
R2808	1-220-878-81	s	RES, CHIP 22 (1005)
R2809	1-220-878-81	s	RES, CHIP 22 (1005)
R2810	1-220-878-81	s	RES, CHIP 22 (1005)
R2811	1-220-878-81	s	RES, CHIP 22 (1005)
R2812	1-220-878-81	s	RES, CHIP 22 (1005)
R2813	1-220-878-81	s	RES, CHIP 22 (1005)
R2814	1-220-878-81	s	RES, CHIP 22 (1005)
R2815	1-220-878-81	s	RES, CHIP 22 (1005)
R2816	1-220-878-81	s	RES, CHIP 22 (1005)
R2817	1-220-878-81	s	RES, CHIP 22 (1005)
R2818	1-220-878-81	s	RES, CHIP 22 (1005)
R2819	1-220-878-81	s	RES, CHIP 22 (1005)
R2820	1-220-878-81	s	RES, CHIP 22 (1005)
R2821	1-220-878-81	s	RES, CHIP 22 (1005)
R2822	1-220-878-81	s	RES, CHIP 22 (1005)
R2823	1-208-875-81	s	RES, CHIP 330 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2824	1-208-875-81	s	RES, CHIP 330 (1005)
R2825	1-208-875-81	s	RES, CHIP 330 (1005)
R2826	1-208-875-81	s	RES, CHIP 330 (1005)
R2827	1-208-875-81	s	RES, CHIP 330 (1005)
R2828	1-208-875-81	s	RES, CHIP 330 (1005)
R2831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2835	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2836	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2900	1-208-935-81	s	RES, CHIP 100K (1005)
R2901	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2902	1-208-863-81	s	RES, CHIP 100 (1005)
R2903	1-208-935-81	s	RES, CHIP 100K (1005)
R2904	1-208-863-81	s	RES, CHIP 100 (1005)
R2905	1-208-863-81	s	RES, CHIP 100 (1005)
R2906	1-208-863-81	s	RES, CHIP 100 (1005)
R2907	1-208-863-81	s	RES, CHIP 100 (1005)
R2908	1-208-911-81	s	RES, CHIP 10K (1005)
R2909	1-208-863-81	s	RES, CHIP 100 (1005)
R2910	1-208-911-81	s	RES, CHIP 10K (1005)
R2911	1-208-923-81	s	RES, CHIP 33K (1005)
R2912	1-208-911-81	s	RES, CHIP 10K (1005)
R2913	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2914	1-208-863-81	s	RES, CHIP 100 (1005)
R2915	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2917	1-208-863-81	s	RES, CHIP 100 (1005)
R2918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2919	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2920	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2921	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2922	1-220-878-81	s	RES, CHIP 22 (1005)
R2923	1-208-943-81	s	RES, CHIP 220K (1005)
R2924	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2925	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2926	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2927	1-208-863-81	s	RES, CHIP 100 (1005)
R2928	1-208-863-81	s	RES, CHIP 100 (1005)
R2929	1-208-875-81	s	RES, CHIP 330 (1005)
R2930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2931	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2933	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2934	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2935	1-208-875-81	s	RES, CHIP 330 (1005)
R2936	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2937	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2938	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2939	1-208-863-81	s	RES, CHIP 100 (1005)
R2940	1-208-863-81	s	RES, CHIP 100 (1005)
R2941	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2943	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2944	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2945	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2946	1-208-935-81	s	RES, CHIP 100K (1005)
R2947	1-208-898-81	s	RES, CHIP 3.0K (1005)
R2948	1-208-870-81	s	RES, CHIP 200 (1005)
R2949	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2952	1-208-899-81	s	RES, CHIP 3.3K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2953	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2954	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2955	1-208-935-81	s	RES, CHIP 100K (1005)
R2956	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2957	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2959	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2960	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2961	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2962	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2963	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2964	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2965	1-208-943-81	s	RES, CHIP 220K (1005)
R2966	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2968	1-208-863-81	s	RES, CHIP 100 (1005)
R2969	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2970	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2971	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2972	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2973	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2974	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2975	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2976	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2977	1-220-878-81	s	RES, CHIP 22 (1005)
R2978	1-220-878-81	s	RES, CHIP 22 (1005)
R2979	1-220-878-81	s	RES, CHIP 22 (1005)
R2980	1-220-878-81	s	RES, CHIP 22 (1005)
R2981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2982	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2983	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2984	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2985	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2986	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2991	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2992	1-208-875-81	s	RES, CHIP 330 (1005)
R2995	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2996	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2997	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2998	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2999	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3003	1-208-863-81	s	RES, CHIP 100 (1005)
R3004	1-208-863-81	s	RES, CHIP 100 (1005)
R3005	1-208-863-81	s	RES, CHIP 100 (1005)
R3006	1-208-863-81	s	RES, CHIP 100 (1005)
R3007	1-208-863-81	s	RES, CHIP 100 (1005)
R3008	1-208-863-81	s	RES, CHIP 100 (1005)
R3009	1-208-863-81	s	RES, CHIP 100 (1005)
R3010	1-208-863-81	s	RES, CHIP 100 (1005)
R3011	1-208-863-81	s	RES, CHIP 100 (1005)
R3012	1-208-863-81	s	RES, CHIP 100 (1005)
R3013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3015	1-208-911-81	s	RES, CHIP 10K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)
R3017	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-923-81	s	RES, CHIP 33K (1005)
R3019	1-208-923-81	s	RES, CHIP 33K (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3020	1-208-923-81	s	RES, CHIP 33K (1005)
R3021	1-208-923-81	s	RES, CHIP 33K (1005)
R3022	1-208-923-81	s	RES, CHIP 33K (1005)
R3023	1-208-923-81	s	RES, CHIP 33K (1005)
R3024	1-208-923-81	s	RES, CHIP 33K (1005)
R3025	1-208-923-81	s	RES, CHIP 33K (1005)
R3026	1-208-923-81	s	RES, CHIP 33K (1005)
R3027	1-208-923-81	s	RES, CHIP 33K (1005)
R3028	1-208-911-81	s	RES, CHIP 10K (1005)
R3029	1-208-911-81	s	RES, CHIP 10K (1005)
R3030	1-208-959-81	s	RES, CHIP 1M (1005)
R3037	1-208-923-81	s	RES, CHIP 33K (1005)
R3038	1-208-923-81	s	RES, CHIP 33K (1005)
R3039	1-208-923-81	s	RES, CHIP 33K (1005)
R3040	1-208-923-81	s	RES, CHIP 33K (1005)
R3041	1-208-923-81	s	RES, CHIP 33K (1005)
R3042	1-208-923-81	s	RES, CHIP 33K (1005)
R3043	1-208-923-81	s	RES, CHIP 33K (1005)
R3044	1-208-923-81	s	RES, CHIP 33K (1005)
R3045	1-208-923-81	s	RES, CHIP 33K (1005)
R3046	1-208-923-81	s	RES, CHIP 33K (1005)
R3047	1-208-927-81	s	RES, CHIP 47K (1005)
R3048	1-208-927-81	s	RES, CHIP 47K (1005)
R3049	1-208-927-81	s	RES, CHIP 47K (1005)
R3050	1-208-927-81	s	RES, CHIP 47K (1005)
R3051	1-208-927-81	s	RES, CHIP 47K (1005)
R3052	1-208-927-81	s	RES, CHIP 47K (1005)
R3053	1-208-935-81	s	RES, CHIP 100K (1005)
R3054	1-208-927-81	s	RES, CHIP 47K (1005)
R3055	1-208-927-81	s	RES, CHIP 47K (1005)
R3056	1-208-927-81	s	RES, CHIP 47K (1005)
R3057	1-208-863-81	s	RES, CHIP 100 (1005)
R3058	1-208-863-81	s	RES, CHIP 100 (1005)
R3059	1-208-863-81	s	RES, CHIP 100 (1005)
R3060	1-208-863-81	s	RES, CHIP 100 (1005)
R3061	1-208-863-81	s	RES, CHIP 100 (1005)
R3062	1-208-863-81	s	RES, CHIP 100 (1005)
R3063	1-208-863-81	s	RES, CHIP 100 (1005)
R3064	1-208-863-81	s	RES, CHIP 100 (1005)
R3065	1-208-863-81	s	RES, CHIP 100 (1005)
R3066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3072	1-208-923-81	s	RES, CHIP 33K (1005)
R3073	1-208-923-81	s	RES, CHIP 33K (1005)
R3074	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3075	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3076	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3300	1-208-863-81	s	RES, CHIP 100 (1005)
R3301	1-208-863-81	s	RES, CHIP 100 (1005)
R3302	1-208-863-81	s	RES, CHIP 100 (1005)
R3303	1-208-863-81	s	RES, CHIP 100 (1005)
R3304	1-208-863-81	s	RES, CHIP 100 (1005)
R3305	1-208-863-81	s	RES, CHIP 100 (1005)
R3306	1-208-863-81	s	RES, CHIP 100 (1005)
R3307	1-208-863-81	s	RES, CHIP 100 (1005)
R3308	1-208-863-81	s	RES, CHIP 100 (1005)
R3309	1-208-863-81	s	RES, CHIP 100 (1005)
R3310	1-208-863-81	s	RES, CHIP 100 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3311	1-208-863-81	s	RES, CHIP 100 (1005)
R3312	1-208-863-81	s	RES, CHIP 100 (1005)
R3313	1-208-863-81	s	RES, CHIP 100 (1005)
R3314	1-208-863-81	s	RES, CHIP 100 (1005)
R3315	1-220-870-81	s	RES, CHIP 10 (1005)
R3316	1-220-870-81	s	RES, CHIP 10 (1005)
R3317	1-220-870-81	s	RES, CHIP 10 (1005)
R3318	1-220-870-81	s	RES, CHIP 10 (1005)
R3319	1-220-870-81	s	RES, CHIP 10 (1005)
R3320	1-220-870-81	s	RES, CHIP 10 (1005)
R3321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3322	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3324	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3325	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3328	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3331	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3337	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3338	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3340	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3341	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3342	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3343	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3344	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3345	1-208-865-81	s	RES, CHIP 120 (1005)
R3346	1-208-865-81	s	RES, CHIP 120 (1005)
R3347	1-208-865-81	s	RES, CHIP 120 (1005)
R3348	1-208-865-81	s	RES, CHIP 120 (1005)
R3349	1-208-865-81	s	RES, CHIP 120 (1005)
R3350	1-208-865-81	s	RES, CHIP 120 (1005)
R3351	1-208-865-81	s	RES, CHIP 120 (1005)
R3352	1-208-865-81	s	RES, CHIP 120 (1005)
R3353	1-208-865-81	s	RES, CHIP 120 (1005)
R3354	1-208-865-81	s	RES, CHIP 120 (1005)
R3355	1-208-865-81	s	RES, CHIP 120 (1005)
R3356	1-208-865-81	s	RES, CHIP 120 (1005)
R3357	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3361	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3363	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3369	1-208-865-81	s	RES, CHIP 120 (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3370	1-208-865-81	s	RES, CHIP 120 (1005)
R3371	1-208-865-81	s	RES, CHIP 120 (1005)
R3372	1-208-865-81	s	RES, CHIP 120 (1005)
R3373	1-208-865-81	s	RES, CHIP 120 (1005)
R3374	1-208-865-81	s	RES, CHIP 120 (1005)
R3375	1-208-865-81	s	RES, CHIP 120 (1005)
R3376	1-208-865-81	s	RES, CHIP 120 (1005)
R3377	1-208-865-81	s	RES, CHIP 120 (1005)
R3378	1-208-865-81	s	RES, CHIP 120 (1005)
R3379	1-208-865-81	s	RES, CHIP 120 (1005)
R3380	1-208-865-81	s	RES, CHIP 120 (1005)
R3381	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3382	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3383	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3391	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3392	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3393	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3394	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3395	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3396	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3397	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3398	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3399	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3402	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3425	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3428	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3429	1-220-870-81	s	RES, CHIP 10 (1005)
R3430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3433	1-220-870-81	s	RES, CHIP 10 (1005)
R3434	1-220-870-81	s	RES, CHIP 10 (1005)
R3435	1-220-870-81	s	RES, CHIP 10 (1005)
R3436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3437	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3438	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3439	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3440	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3444	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3445	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3447	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3449	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3451	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3453	1-220-870-81	s	RES, CHIP 10 (1005)
R3454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3456	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3457	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3460	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3461	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3462	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3466	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3469	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3471	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3472	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3473	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3474	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3475	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3476	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3477	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3478	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3479	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3480	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3481	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3482	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3483	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3484	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3485	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3486	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3487	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3488	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3489	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3490	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3491	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3492	1-220-870-81	s	RES, CHIP 10 (1005)
R3493	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3494	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3495	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3496	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3497	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3498	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3499	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3502	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3504	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3506	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3514	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3516	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3517	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3518	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3521	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3522	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3523	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3524	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3529	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3534	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3535	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3536	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3538	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3539	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3540	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3541	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3542	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3544	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3545	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3546	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3547	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3548	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3549	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3550	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3553	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3554	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3555	1-208-879-81	s	RES, CHIP 470 (1005)
R3556	1-208-879-81	s	RES, CHIP 470 (1005)
R3557	1-208-879-81	s	RES, CHIP 470 (1005)
R3558	1-208-879-81	s	RES, CHIP 470 (1005)
R3559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3567	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3568	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3569	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3570	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3571	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3572	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3573	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3574	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3575	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3576	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3577	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3578	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3579	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3580	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3581	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3582	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3583	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3584	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3585	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3586	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3587	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3588	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3589	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3590	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3591	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3592	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3593	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3594	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3595	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3596	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3597	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3598	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3599	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3600	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3603	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3800	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3803	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3813	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3814	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3815	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3824	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3828	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3830	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3831	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3832	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3833	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3834	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3835	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4015	1-208-859-81	s	RES, CHIP 68 (1005)
R4016	1-208-859-81	s	RES, CHIP 68 (1005)
R4017	1-208-859-81	s	RES, CHIP 68 (1005)
R4018	1-208-859-81	s	RES, CHIP 68 (1005)
R4019	1-208-859-81	s	RES, CHIP 68 (1005)
R4020	1-208-859-81	s	RES, CHIP 68 (1005)
R4021	1-208-859-81	s	RES, CHIP 68 (1005)
R4022	1-208-859-81	s	RES, CHIP 68 (1005)
R4023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4026	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4073	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4074	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4075	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4076	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4077	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4078	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4081	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4082	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4083	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4084	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4085	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4086	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4087	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4088	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4089	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4090	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4091	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4092	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4093	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4094	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4095	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4096	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4097	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4098	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4099	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4101	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4116	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4117	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4119	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4120	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4121	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4122	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4124	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4125	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4133	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4134	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4136	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4137	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4139	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4140	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4141	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4144	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4146	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4148	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4150	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4157	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4158	1-220-870-81	s	RES, CHIP 10 (1005)
R4159	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4160	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4161	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4162	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4163	1-220-870-81	s	RES, CHIP 10 (1005)
R4164	1-220-870-81	s	RES, CHIP 10 (1005)
R4165	1-220-870-81	s	RES, CHIP 10 (1005)
R4166	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4169	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4171	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4172	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4173	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4174	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4175	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4176	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4177	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4178	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4179	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4180	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4181	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4182	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4183	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4188	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4189	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4190	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4191	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4192	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4194	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4195	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4196	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4197	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4198	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4199	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4200	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4203	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R4204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4210	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4211	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4212	1-208-903-81	s	RES, CHIP 4.7K (1005)
R4213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R5001	1-208-863-81	s	RES, CHIP 100 (1005)
R5002	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5007	1-208-865-81	s	RES, CHIP 120 (1005)
R5008	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5009	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5038	1-208-935-81	s	RES, CHIP 100K (1005)
R5039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB101	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB102	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB105	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB114	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB115	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB116	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB117	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB118	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB119	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB120	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB121	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB122	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB123	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB124	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB125	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB200	1-234-381-21	s	RES, NETWORK 100K (1005X4)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB201	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB202	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB203	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB206	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB207	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB208	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB209	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB400	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB401	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB403	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB405	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB406	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB407	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB408	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB409	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB410	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB411	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB412	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB413	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB414	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB415	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB416	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB602	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB800	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2203	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2600	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2601	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2602	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2604	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2605	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2606	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2607	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2900	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB2901	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3300	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3302	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3303	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3304	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3305	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3306	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3307	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3308	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3309	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3310	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3311	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3312	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3313	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3314	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3315	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3316	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3317	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3318	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3319	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3320	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3321	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3322	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3323	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3324	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3325	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4000	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4001	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4002	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4003	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4004	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4005	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4006	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4007	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4008	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4009	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4010	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4011	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4012	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4013	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4018	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4019	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4020	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4021	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4022	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4023	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4024	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4025	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4026	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4027	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4028	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4029	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4030	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB4031	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S400	1-692-270-41	s	SWITCH, SLIDE
S403	1-692-270-41	s	SWITCH, SLIDE
S2900	1-771-721-21	s	SWITCH, TACTILE
S2901	1-692-270-41	s	SWITCH, SLIDE
S3300	1-692-270-41	s	SWITCH, SLIDE
S3301	1-762-117-21	s	SWITCH, ROTARY
S4000	1-692-270-41	s	SWITCH, SLIDE
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP202	1-535-877-22	s	CHIP, CHECKER
TP203	1-535-877-22	s	CHIP, CHECKER
TP600	1-535-877-22	s	CHIP, CHECKER

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP601	1-535-877-22	s	CHIP, CHECKER
TP602	1-535-877-22	s	CHIP, CHECKER
TP603	1-535-877-22	s	CHIP, CHECKER
TP604	1-535-877-22	s	CHIP, CHECKER
TP605	1-535-877-22	s	CHIP, CHECKER
TP606	1-535-877-22	s	CHIP, CHECKER
TP607	1-535-877-22	s	CHIP, CHECKER
TP608	1-535-877-22	s	CHIP, CHECKER
TP609	1-535-877-22	s	CHIP, CHECKER
TP610	1-535-877-22	s	CHIP, CHECKER
TP611	1-535-877-22	s	CHIP, CHECKER
TP612	1-535-877-22	s	CHIP, CHECKER
TP613	1-535-877-22	s	CHIP, CHECKER
TP614	1-535-877-22	s	CHIP, CHECKER
TP615	1-535-877-22	s	CHIP, CHECKER
TP616	1-535-877-22	s	CHIP, CHECKER
TP617	1-535-877-22	s	CHIP, CHECKER
TP618	1-535-877-22	s	CHIP, CHECKER
TP619	1-535-877-22	s	CHIP, CHECKER
TP620	1-535-877-22	s	CHIP, CHECKER
TP621	1-535-877-22	s	CHIP, CHECKER
TP622	1-535-877-22	s	CHIP, CHECKER
TP623	1-535-877-22	s	CHIP, CHECKER
TP624	1-535-877-22	s	CHIP, CHECKER
TP625	1-535-877-22	s	CHIP, CHECKER
TP626	1-535-877-22	s	CHIP, CHECKER
TP627	1-535-877-22	s	CHIP, CHECKER
TP628	1-535-877-22	s	CHIP, CHECKER
TP629	1-535-877-22	s	CHIP, CHECKER
TP630	1-535-877-22	s	CHIP, CHECKER
TP631	1-535-877-22	s	CHIP, CHECKER
TP800	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP803	1-535-877-22	s	CHIP, CHECKER
TP804	1-535-877-22	s	CHIP, CHECKER
TP805	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP904	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1002	1-535-877-22	s	CHIP, CHECKER
TP1003	1-535-877-22	s	CHIP, CHECKER
TP1004	1-535-877-22	s	CHIP, CHECKER
TP1005	1-535-877-22	s	CHIP, CHECKER
TP1006	1-535-877-22	s	CHIP, CHECKER
TP1007	1-535-877-22	s	CHIP, CHECKER
TP1200	1-535-877-22	s	CHIP, CHECKER
TP1201	1-535-877-22	s	CHIP, CHECKER
TP1202	1-535-877-22	s	CHIP, CHECKER
TP1203	1-535-877-22	s	CHIP, CHECKER
TP1204	1-535-877-22	s	CHIP, CHECKER
TP1205	1-535-877-22	s	CHIP, CHECKER
TP1206	1-535-877-22	s	CHIP, CHECKER
TP1207	1-535-877-22	s	CHIP, CHECKER
TP1208	1-535-877-22	s	CHIP, CHECKER

(EQ-109 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP1209	1-535-877-22	s	CHIP, CHECKER
TP1210	1-535-877-22	s	CHIP, CHECKER
TP1211	1-535-877-22	s	CHIP, CHECKER
TP1212	1-535-877-22	s	CHIP, CHECKER
TP1213	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1404	1-535-877-22	s	CHIP, CHECKER
TP1405	1-535-877-22	s	CHIP, CHECKER
TP1406	1-535-877-22	s	CHIP, CHECKER
TP1407	1-535-877-22	s	CHIP, CHECKER
TP1600	1-535-877-22	s	CHIP, CHECKER
TP1601	1-535-877-22	s	CHIP, CHECKER
TP1602	1-535-877-22	s	CHIP, CHECKER
TP1603	1-535-877-22	s	CHIP, CHECKER
TP1604	1-535-877-22	s	CHIP, CHECKER
TP1605	1-535-877-22	s	CHIP, CHECKER
TP1606	1-535-877-22	s	CHIP, CHECKER
TP1607	1-535-877-22	s	CHIP, CHECKER
TP1608	1-535-877-22	s	CHIP, CHECKER
TP1609	1-535-877-22	s	CHIP, CHECKER
TP1610	1-535-877-22	s	CHIP, CHECKER
TP1611	1-535-877-22	s	CHIP, CHECKER
TP1612	1-535-877-22	s	CHIP, CHECKER
TP1613	1-535-877-22	s	CHIP, CHECKER
TP1800	1-535-877-22	s	CHIP, CHECKER
TP1801	1-535-877-22	s	CHIP, CHECKER
TP1802	1-535-877-22	s	CHIP, CHECKER
TP1803	1-535-877-22	s	CHIP, CHECKER
TP1804	1-535-877-22	s	CHIP, CHECKER
TP1805	1-535-877-22	s	CHIP, CHECKER
TP1806	1-535-877-22	s	CHIP, CHECKER
TP1807	1-535-877-22	s	CHIP, CHECKER
TP2000	1-535-877-22	s	CHIP, CHECKER
TP2001	1-535-877-22	s	CHIP, CHECKER
TP2002	1-535-877-22	s	CHIP, CHECKER
TP2003	1-535-877-22	s	CHIP, CHECKER
TP2004	1-535-877-22	s	CHIP, CHECKER
TP2005	1-535-877-22	s	CHIP, CHECKER
TP2006	1-535-877-22	s	CHIP, CHECKER
TP2007	1-535-877-22	s	CHIP, CHECKER
TP2008	1-535-877-22	s	CHIP, CHECKER
TP2009	1-535-877-22	s	CHIP, CHECKER
TP2010	1-535-877-22	s	CHIP, CHECKER
TP2011	1-535-877-22	s	CHIP, CHECKER
TP2012	1-535-877-22	s	CHIP, CHECKER
TP2013	1-535-877-22	s	CHIP, CHECKER
TP2600	1-535-877-22	s	CHIP, CHECKER
TP2900	1-535-877-22	s	CHIP, CHECKER
X200	1-813-950-11	s	OSCILLATOR, CRYSTAL(51.722710)
X201	1-813-951-11	s	OSCILLATOR, CRYSTAL(51.671039)
X202	1-813-952-11	s	OSCILLATOR, CRYSTAL(43.102258)
X203	1-813-953-11	s	OSCILLATOR, CRYSTAL(41.378168)
X204	1-813-954-11	s	OSCILLATOR, CRYSTAL(41.336831)
X2900	1-814-002-11	s	OSCILLATOR, CRYSTAL (8MHZ)

FL-350 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1444-041-A	s	MOUNTED CIRCUIT BOARD, FL-350

FP-155 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-730-A	s	MOUNTED CIRCUIT BOARD, FP-155
1pc	1-794-233-11	o	CONNECTOR, CARD (PC CARD)
2pcs	7-628-253-35	s	SCREW +PS 2X8
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C115	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C116	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C204	1-126-399-21	s	CAP, CHIP ELECT 10MF (5X5.7)
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C302	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN2	1-794-226-11	o	CONNECTOR, BOARD TO BOARD 50P
CN3	1-794-232-11	o	CONNECTOR, CARD (PC CARD)
CN100	1-793-807-21	o	PIN, CONNECTOR (WITH PWB) 20P
D301	8-719-017-33	s	DIODE 02DZ20-TPH3
D302	8-719-017-33	s	DIODE 02DZ20-TPH3
F301	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)

(FP-155 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
F302	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
FB100	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB302	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB303	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB304	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB305	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB308	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
IC100	6-701-669-01	s	IC ML60851DTB
IC101	8-752-392-03	s	IC CXD1095BR
IC102	6-707-891-01	s	IC TC74VHCT245AFT(EKJ)
IC103	6-707-891-01	s	IC TC74VHCT245AFT(EKJ)
IC104	8-759-578-68	s	IC SN74LVCC4245APWR
IC106	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC108	8-759-543-08	s	IC LM2940CSX-5.0
IC110	8-759-475-60	s	IC TC74LCX16374AFT(EL)
IC112	6-707-863-01	s	IC TC74VHC08FT(EKJ)
IC113	8-759-689-09	s	IC SN65LVDT2DBVR
IC114	8-759-392-77	s	IC SN74LVC245APWR
IC115	8-759-392-77	s	IC SN74LVC245APWR
IC116	8-759-392-77	s	IC SN74LVC245APWR
IC117	8-759-392-77	s	IC SN74LVC245APWR
IC118	8-759-392-77	s	IC SN74LVC245APWR
IC119	8-759-392-77	s	IC SN74LVC245APWR
IC120	8-759-392-77	s	IC SN74LVC245APWR
IC121	8-759-689-09	s	IC SN65LVDT2DBVR
IC122	6-707-877-01	s	IC TC74VHC32FT(EKJ)
IC123	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC124	6-707-863-01	s	IC TC74VHC08FT(EKJ)
IC200	6-704-360-01	s	IC MR-SHPC-01V2T-F
IC201	8-759-569-93	s	IC TPS2211IDBR
IC301	6-711-334-01	s	IC DS92LV1021AMSAX
IC302	8-759-429-23	s	IC TL16C550CPT
IC303	6-701-543-01	s	IC SN75C1168NSR
IC304	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC305	8-759-592-49	s	IC TC7SZ125FU(TE85R)
L301	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q100	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q101	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q102	6-551-286-01	s	TRANSISTOR SI6943BDQ-T1
R100	1-208-935-81	s	RES, CHIP 100K (1005)
R101	1-208-935-81	s	RES, CHIP 100K (1005)
R103	1-208-891-81	s	RES, CHIP 1.5K (1005)
R106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R107	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R108	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R115	1-208-935-81	s	RES, CHIP 100K (1005)
R116	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-935-81	s	RES, CHIP 100K (1005)
R125	1-208-879-81	s	RES, CHIP 470 (1005)
R129	1-220-870-81	s	RES, CHIP 10 (1005)
R130	1-220-870-81	s	RES, CHIP 10 (1005)
R133	1-208-935-81	s	RES, CHIP 100K (1005)
R135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R202	1-208-911-81	s	RES, CHIP 10K (1005)

(FP-155 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-935-81	s	RES, CHIP 100K (1005)
R317	1-208-935-81	s	RES, CHIP 100K (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-208-935-81	s	RES, CHIP 100K (1005)
R321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB101	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB102	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB103	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB104	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB105	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB106	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB107	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB108	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB109	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB110	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB111	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB112	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB113	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB114	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB115	1-233-575-21	s	RES, CHIP NETWORK 22 (3216)
RB116	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB117	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB118	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB119	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB120	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB121	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB122	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB123	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB124	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB125	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB126	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB127	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB128	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB129	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB130	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB131	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB132	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB133	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB134	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB135	1-234-381-21	s	RES, NETWORK 100K (1005X4)
VDR301	1-803-742-21	s	VARISTOR, CHIP
X1	1-814-009-11	s	OSCILLATOR, CRYSTAL(8.192MHZ)
X101	1-813-264-11	s	OSCILLATOR, CRYSTAL

FP-163 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1441-535-A	s	FP FIXED PLATE ASSY (This assembly includes the FP-163 board.)
1pc	1-500-082-11	s	CLAMP, SLEEVE FERRITE
1pc	1-965-382-11	s	HARNESS, SUB (FP-KY 20P V2)
1pc	3-272-391-01	s	CUSHION, FP
2pcs	3-729-076-11	s	SCREW (+B) (2X4)
2pcs	7-685-871-01	s	SCREW +BVTT 3X6 (S)
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C115	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C116	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C302	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(FP-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
CN2	1-794-226-11	o	CONNECTOR, BOARD TO BOARD 50P
CN100	1-793-807-21	o	PIN, CONNECTOR (WITH PWB) 20P
CN404	1-817-653-42	s	MEMORY STICK CONNECTOR
CN405	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D3	8-719-077-09	s	DIODE CL-196HR-CD-T
D4	6-501-207-01	s	DIODE CL-201HR-C-TSL
D301	8-719-083-67	s	DI UDZSUSTE-1720B
D302	8-719-083-67	s	DI UDZSUSTE-1720B
F301	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
F302	⚠ 1-533-999-21	s	FUSE, (SMD) (2A/125V)
FB100	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB303	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB304	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB305	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB308	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC100	6-701-669-01	s	IC ML60851DTB
IC101	6-713-799-01	s	IC BU7122KV-E2
IC102	6-707-891-01	s	IC TC74VHCT245AFT(EKJ)
IC103	6-707-891-01	s	IC TC74VHCT245AFT(EKJ)
IC104	8-759-578-68	s	IC SN74LVCC4245APWR
IC106	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC108	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC110	8-759-475-60	s	IC TC74LCX16374AFT(EL)
IC112	6-707-863-01	s	IC TC74VHC08FT(EKJ)
IC113	8-759-689-09	s	IC SN65LVDT2DBVR
IC116	8-759-392-77	s	IC SN74LVC245APWR
IC117	8-759-392-77	s	IC SN74LVC245APWR
IC118	8-759-392-77	s	IC SN74LVC245APWR
IC119	8-759-392-77	s	IC SN74LVC245APWR
IC120	8-759-392-77	s	IC SN74LVC245APWR
IC121	8-759-689-09	s	IC SN65LVDT2DBVR
IC122	6-707-877-01	s	IC TC74VHC32FT(EKJ)
IC123	6-707-861-01	s	IC TC74VHC04FT(EKJ)
IC125	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC126	6-708-277-01	s	IC CDCVF25081PWR
IC301	6-711-334-01	s	IC DS92LV1021AMSAX
IC302	8-759-429-23	s	IC TL16C550CPT
IC303	6-701-543-01	s	IC SN75C1168NSR
IC304	6-707-885-01	s	IC TC74VHCT08AFT(EKJ)
IC305	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC401	6-711-725-01	s	IC EPM240T100C5NRR
IC402	8-759-584-32	s	IC MB86189PFV-G-BND-ER-E1
IC403	8-759-573-97	s	IC SN74LVC541APWR
L1	1-416-510-21	s	COIL, CHOKE 100UH
L301	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q1	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q2	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q3	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR

(FP-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q100	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q101	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q102	6-551-286-01	s	TRANSISTOR SI6943BDQ-T1
R100	1-208-935-81	s	RES, CHIP 100K (1005)
R101	1-208-935-81	s	RES, CHIP 100K (1005)
R103	1-208-891-81	s	RES, CHIP 1.5K (1005)
R106	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R110	1-208-887-81	s	RES, CHIP 1.0K (1005)
R115	1-208-935-81	s	RES, CHIP 100K (1005)
R116	1-208-935-81	s	RES, CHIP 100K (1005)
R121	1-208-935-81	s	RES, CHIP 100K (1005)
R125	1-208-879-81	s	RES, CHIP 470 (1005)
R129	1-220-878-81	s	RES, CHIP 22 (1005)
R130	1-220-878-81	s	RES, CHIP 22 (1005)
R132	1-208-935-81	s	RES, CHIP 100K (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R134	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-220-878-81	s	RES, CHIP 22 (1005)
R136	1-220-878-81	s	RES, CHIP 22 (1005)
R137	1-220-878-81	s	RES, CHIP 22 (1005)
R138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R140	1-220-878-81	s	RES, CHIP 22 (1005)
R141	1-220-878-81	s	RES, CHIP 22 (1005)
R142	1-220-878-81	s	RES, CHIP 22 (1005)
R143	1-220-878-81	s	RES, CHIP 22 (1005)
R145	1-208-879-81	s	RES, CHIP 470 (1005)
R146	1-220-878-81	s	RES, CHIP 22 (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R313	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R314	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-208-935-81	s	RES, CHIP 100K (1005)
R317	1-208-935-81	s	RES, CHIP 100K (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-935-81	s	RES, CHIP 100K (1005)
R321	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R322	1-208-911-81	s	RES, CHIP 10K (1005)
R323	1-208-911-81	s	RES, CHIP 10K (1005)
R324	1-208-911-81	s	RES, CHIP 10K (1005)
R325	1-208-911-81	s	RES, CHIP 10K (1005)
R326	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R327	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R329	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R330	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-218-933-81	s	RES, CHIP 22
R420	1-218-933-81	s	RES, CHIP 22
R421	1-218-933-81	s	RES, CHIP 22
R422	1-218-933-81	s	RES, CHIP 22
R423	1-218-933-81	s	RES, CHIP 22
R424	1-218-933-81	s	RES, CHIP 22
R425	1-218-933-81	s	RES, CHIP 22
R426	1-218-933-81	s	RES, CHIP 22
R427	1-218-933-81	s	RES, CHIP 22
R428	1-218-973-81	s	RES, CHIP 47K
R431	1-218-973-81	s	RES, CHIP 47K

(FP-163 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R432	1-218-933-81	s	RES, CHIP 22
R433	1-218-973-81	s	RES, CHIP 47K
R434	1-218-933-81	s	RES, CHIP 22
R436	1-218-945-81	s	RES, CHIP 220
R437	1-218-933-81	s	RES, CHIP 22
R438	1-218-973-81	s	RES, CHIP 47K
R439	1-218-933-81	s	RES, CHIP 22
R440	1-218-933-81	s	RES, CHIP 22
R441	1-218-933-81	s	RES, CHIP 22
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R443	1-218-965-81	s	RES, CHIP 10K 1005
R444	1-218-949-81	s	RES, CHIP 470
R445	1-218-953-81	s	RES, CHIP 1.0K
R446	1-218-969-81	s	RES, CHIP 22K
R447	1-218-929-81	s	RES, CHIP 10
R448	1-218-929-81	s	RES, CHIP 10
RB104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB119	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB120	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB121	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB122	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB123	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB124	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB125	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB126	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB128	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB130	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB131	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB132	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB134	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB135	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB136	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB406	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB407	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB408	1-234-369-21	s	RES, NETWORK 10 (1005X4)
VDR301	1-803-742-21	s	VARISTOR, CHIP
X1	1-814-009-11	s	OSCILLATOR, CRYSTAL(8.192MHZ)
X101	1-813-264-11	s	OSCILLATOR, CRYSTAL

HIF-46 BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-736-A	s	MOUNTED CIRCUIT BOARD, HIF-46
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C103	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C107	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C108	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C109	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C204	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C207	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C213	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C214	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C215	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C216	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C217	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C222	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C223	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C224	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C225	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C233	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C249	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C252	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C253	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C256	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C257	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C258	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C259	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C260	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C261	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C262	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C263	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C264	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C265	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C266	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C267	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C268	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C271	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C285	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C286	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C287	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C288	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C289	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C290	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C291	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C292	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C293	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C296	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C297	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C320	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C321	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C322	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C325	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C326	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C422	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C463	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C474	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C478	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C481	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C488	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C489	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C490	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C494	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C495	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C605	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C700	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C701	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C702	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C731	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C732	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C735	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C741	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C757	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C758	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C777	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C794	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C797	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1150	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1153	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1168	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1177	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1181	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1183	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1195	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1198	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1200	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1201	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1202	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1203	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1204	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1205	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1209	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1217	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1218	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1226	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1227	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1233	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1234	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1242	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1243	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1246	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1247	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1604	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1605	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1606	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1607	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1700	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1701	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1702	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1703	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1709	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1718	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1721	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1730	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1733	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1734	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1735	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1736	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1739	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1742	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1748	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1749	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1750	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1753	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1762	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1763	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1769	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1779	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1782	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1786	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1790	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1793	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1797	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1807	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1877	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1878	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1900	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1901	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1902	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1903	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1904	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1905	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1906	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1907	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1908	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1909	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2000	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2001	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2002	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2003	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2004	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2005	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2006	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2007	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2008	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2009	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2041	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2044	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2047	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2050	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2053	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2054	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2056	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2059	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2062	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2076	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2080	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2086	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2088	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2090	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2092	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2094	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2095	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2096	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2097	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2098	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2115	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2121	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2127	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2128	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2137	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2142	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2147	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2157	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2161	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2168	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2170	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2172	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2212	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2213	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2214	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2215	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2216	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2217	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2218	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2219	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2220	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2221	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2222	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2223	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2224	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2225	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2226	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2227	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2228	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2229	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2236	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2244	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2446	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2447	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2448	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2454	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2503	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2509	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2510	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2511	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2513	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2514	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2600	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2601	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2602	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2603	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2604	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2605	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2606	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2607	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2608	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2609	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2627	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2628	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2632	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2633	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2675	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2676	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2677	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2678	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2679	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2680	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2681	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2682	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2683	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2684	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2685	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2686	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2687	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2688	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2689	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2690	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2691	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2692	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2693	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2694	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2695	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2696	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2699	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2800	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2802	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2803	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2806	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2807	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2808	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2809	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2810	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2811	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2812	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2813	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2814	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2815	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2816	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2817	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2818	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2819	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C2820	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2822	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2824	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2825	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2826	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2827	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2828	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2829	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2836	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2837	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2838	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2839	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2840	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2841	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2842	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2843	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2844	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2845	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2846	1-100-165-21	s	CAP, ELECT 47MF (8X7)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2847	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2848	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2849	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2852	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C3100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3114	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3118	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3121	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
CN210	1-764-243-31	o	CONNECTOR (COAXIAL)
CN211	1-764-243-31	o	CONNECTOR (COAXIAL)
CN213	1-764-243-31	o	CONNECTOR (COAXIAL)
CN2401	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D501	8-719-077-09	s	DIODE CL-196HR-CD-T
D502	8-719-077-09	s	DIODE CL-196HR-CD-T
D503	8-719-074-31	s	DIODE CL-196YG-CD-T
D504	8-719-074-31	s	DIODE CL-196YG-CD-T
D900	8-719-074-31	s	DIODE CL-196YG-CD-T
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-077-09	s	DIODE CL-196HR-CD-T
D903	8-719-077-09	s	DIODE CL-196HR-CD-T
D1400	8-719-074-31	s	DIODE CL-196YG-CD-T
D1401	8-719-074-31	s	DIODE CL-196YG-CD-T
D1402	8-719-077-09	s	DIODE CL-196HR-CD-T
D1403	8-719-077-09	s	DIODE CL-196HR-CD-T
D1900	8-719-074-31	s	DIODE CL-196YG-CD-T
D1901	8-719-074-31	s	DIODE CL-196YG-CD-T
D1902	8-719-077-09	s	DIODE CL-196HR-CD-T
D1903	8-719-077-09	s	DIODE CL-196HR-CD-T
D2200	8-719-941-21	s	DIODE DAP202UT106
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
F2600	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2601	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2602	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F2603	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F2604	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB709	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1709	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1712	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1713	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2000	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
FB2001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2002	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2622	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2623	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2624	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2625	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2626	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FL2200	1-234-040-23	s	FILTER, LOW PASS
FL2201	1-234-040-23	s	FILTER, LOW PASS
IC100	8-759-573-97	s	IC SN74LVC541APWR
IC103	6-701-990-01	s	IC SN74LVC257APWR
IC104	8-759-694-36	s	IC SN74CBTLV3257PWR
IC105	6-700-804-01	s	IC SN74LVC574APWR
IC106	6-708-277-01	s	IC CDCVF25081PWR
IC107	8-759-573-97	s	IC SN74LVC541APWR
IC108	8-759-573-97	s	IC SN74LVC541APWR
IC109	6-708-277-01	s	IC CDCVF25081PWR
IC110	8-759-573-97	s	IC SN74LVC541APWR
IC111	6-700-804-01	s	IC SN74LVC574APWR
IC112	8-759-639-86	s	IC SN65LVDS32DR
IC113	8-759-639-86	s	IC SN65LVDS32DR
IC114	8-759-639-86	s	IC SN65LVDS32DR
IC115	8-759-573-97	s	IC SN74LVC541APWR
IC117	8-759-683-80	s	IC SN65LVDS1DBVR
IC200	6-702-620-01	s	IC GS1524-CKDE3
IC201	6-702-620-01	s	IC GS1524-CKDE3
IC202	6-702-621-01	s	IC GS1528-CKAE3
IC204	6-702-621-01	s	IC GS1528-CKAE3
IC206	6-702-621-01	s	IC GS1528-CKAE3
IC207	6-702-621-01	s	IC GS1528-CKAE3
IC208	6-702-621-01	s	IC GS1528-CKAE3
IC209	6-702-621-01	s	IC GS1528-CKAE3
IC210	6-702-621-01	s	IC GS1528-CKAE3
IC211	6-702-621-01	s	IC GS1528-CKAE3
IC213	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC214	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC401	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC402	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC403	8-759-639-85	s	IC SN65LVDS31DR
IC404	6-706-682-01	s	IC MC100LVELT22DR2
IC406	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC407	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC408	6-706-682-01	s	IC MC100LVELT22DR2
IC409	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC410	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC502	8-759-683-80	s	IC SN65LVDS1DBVR
IC1200	6-700-764-01	s	IC DS90CR288AMTDX
IC1201	6-700-651-01	s	IC DS90CR483VJDX
IC1300	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1301	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1302	6-707-456-01	s	IC MT46V16M16P-6T-T26A

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC1303	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1304	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1305	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1503	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1504	8-759-573-97	s	IC SN74LVC541APWR
IC1505	8-759-573-97	s	IC SN74LVC541APWR
IC2101	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC2102	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC2103	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC2200	6-701-079-01	s	IC ADV7300AKST
IC2201	6-701-079-01	s	IC ADV7300AKST
IC2202	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2203	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2204	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2205	8-759-381-54	s	IC UPC812G2-E2
IC2206	8-759-381-54	s	IC UPC812G2-E2
IC2207	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2208	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC2209	8-752-068-24	s	IC CXA1450M-TH
IC2210	8-759-255-83	s	IC LT1227CS8-E2
IC2211	8-759-255-83	s	IC LT1227CS8-E2
IC2212	6-700-804-01	s	IC SN74LVC574APWR
IC2213	6-700-804-01	s	IC SN74LVC574APWR
IC2214	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2215	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2216	8-759-683-80	s	IC SN65LVDS1DBVR
IC2217	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2218	8-759-669-45	s	IC TL062CPWR-12
IC2219	8-759-669-45	s	IC TL062CPWR-12
IC2221	8-759-672-76	s	IC AK9813BF-E2
IC2401	8-759-679-55	s	IC SN74LVC08APWR
IC2402	8-759-573-97	s	IC SN74LVC541APWR
IC2403	8-759-573-97	s	IC SN74LVC541APWR
IC2404	8-759-573-97	s	IC SN74LVC541APWR
IC2405	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2406	8-759-392-77	s	IC SN74LVC245APWR
IC2407	8-759-392-77	s	IC SN74LVC245APWR
IC2408	6-708-277-01	s	IC CDCVF25081PWR
IC2409	8-759-573-97	s	IC SN74LVC541APWR
IC2410	8-759-392-77	s	IC SN74LVC245APWR
IC2411	8-759-392-77	s	IC SN74LVC245APWR
IC2412	8-759-573-97	s	IC SN74LVC541APWR
IC2413	8-759-573-97	s	IC SN74LVC541APWR
IC2414	8-759-573-97	s	IC SN74LVC541APWR
IC2415	6-701-990-01	s	IC SN74LVC257APWR
IC2417	8-759-549-20	s	IC SN74LV541APWR
IC2418	8-759-549-20	s	IC SN74LV541APWR
IC2419	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2420	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2421	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2423	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC2503	8-759-392-65	s	IC AD828ARZ-REEL
IC2505	8-759-523-01	s	IC TC74HC4052AFT(EL)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC2506	6-701-990-01	s	IC SN74LVC257APWR
IC2507	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2508	8-759-573-97	s	IC SN74LVC541APWR
IC2509	8-759-392-77	s	IC SN74LVC245APWR
IC2510	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC2511	8-759-573-97	s	IC SN74LVC541APWR
IC2512	6-701-990-01	s	IC SN74LVC257APWR
IC2513	6-701-990-01	s	IC SN74LVC257APWR
IC2514	8-759-669-41	s	IC SN74LVC125APWR-12
IC2515	6-701-990-01	s	IC SN74LVC257APWR
IC2516	8-759-679-55	s	IC SN74LVC08APWR
IC2600	8-759-460-74	s	IC BA05FP-E2
IC2601	8-759-662-86	s	IC NJM79M05DL1A(TE2)
IC2602	6-701-572-01	s	IC TPS54610PWPR
IC2603	6-701-572-01	s	IC TPS54610PWPR
IC2604	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2605	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2606	6-700-655-01	s	IC LT1963ES8#TR
IC2607	6-700-655-01	s	IC LT1963ES8#TR
IC2608	6-705-562-01	s	IC UPC29M33AT-E1-AZ
IC2609	6-707-035-01	s	IC LP2996MRX
IC2610	6-707-035-01	s	IC LP2996MRX
IC2611	6-705-562-01	s	IC UPC29M33AT-E1-AZ
IC2612	6-705-562-01	s	IC UPC29M33AT-E1-AZ
IC2613	6-700-655-01	s	IC LT1963ES8#TR
IC2614	6-707-035-01	s	IC LP2996MRX
IC2615	6-700-399-01	s	IC UPC2925T-E1
L200	1-414-460-21	s	INDUCTOR, CHIP (S) 5.6NH
L201	1-414-460-21	s	INDUCTOR, CHIP (S) 5.6NH
L202	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L203	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L204	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L206	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L208	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L209	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L210	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L211	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L212	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L213	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L214	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L215	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L216	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L217	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L218	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L219	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L220	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L221	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L223	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L224	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L226	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L227	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L228	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L229	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L230	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L231	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L232	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L233	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L234	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
L235	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L236	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L237	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L238	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L2100	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2200	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2201	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2202	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2203	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2204	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2205	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2206	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2500	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2600	1-419-491-21	s	COIL, CHOKE 10UH
L2601	1-419-491-21	s	COIL, CHOKE 10UH
L2602	1-419-491-21	s	COIL, CHOKE 10UH
L2604	1-419-491-21	s	COIL, CHOKE 10UH
L2609	1-419-630-21	s	COIL, CHOKE 4.7UH
L2610	1-419-630-21	s	COIL, CHOKE 4.7UH
L2620	1-419-630-21	s	COIL, CHOKE 4.7UH
L2621	1-419-630-21	s	COIL, CHOKE 4.7UH
L2622	1-419-630-21	s	COIL, CHOKE 4.7UH
L2623	1-419-630-21	s	COIL, CHOKE 4.7UH
L2624	1-419-630-21	s	COIL, CHOKE 4.7UH
L2625	1-419-630-21	s	COIL, CHOKE 4.7UH
L2627	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L2628	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q204	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q206	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q208	8-729-041-23	s	TRANSISTOR NDS356AP
Q210	8-729-041-23	s	TRANSISTOR NDS356AP
Q212	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q213	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q214	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q215	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q216	8-729-041-23	s	TRANSISTOR NDS356AP
Q217	8-729-041-23	s	TRANSISTOR NDS356AP
Q218	8-729-041-23	s	TRANSISTOR NDS356AP
Q219	8-729-041-23	s	TRANSISTOR NDS356AP
Q220	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q221	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q223	8-729-041-23	s	TRANSISTOR NDS356AP
Q224	8-729-041-23	s	TRANSISTOR NDS356AP
Q400	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q405	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2200	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q2201	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-208-855-81	s	RES, CHIP 47 (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-911-81	s	RES, CHIP 10K (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-911-81	s	RES, CHIP 10K (1005)
R109	1-208-911-81	s	RES, CHIP 10K (1005)
R110	1-208-855-81	s	RES, CHIP 47 (1005)
R111	1-208-855-81	s	RES, CHIP 47 (1005)
R112	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-208-855-81	s	RES, CHIP 47 (1005)
R114	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-208-855-81	s	RES, CHIP 47 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-208-855-81	s	RES, CHIP 47 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-208-855-81	s	RES, CHIP 47 (1005)
R122	1-208-855-81	s	RES, CHIP 47 (1005)
R123	1-208-855-81	s	RES, CHIP 47 (1005)
R124	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R128	1-220-878-81	s	RES, CHIP 22 (1005)
R129	1-220-878-81	s	RES, CHIP 22 (1005)
R130	1-220-878-81	s	RES, CHIP 22 (1005)
R131	1-220-878-81	s	RES, CHIP 22 (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R134	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-220-878-81	s	RES, CHIP 22 (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-855-81	s	RES, CHIP 47 (1005)
R139	1-208-855-81	s	RES, CHIP 47 (1005)
R140	1-208-855-81	s	RES, CHIP 47 (1005)
R141	1-208-855-81	s	RES, CHIP 47 (1005)
R142	1-208-855-81	s	RES, CHIP 47 (1005)
R143	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R144	1-220-878-81	s	RES, CHIP 22 (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-208-855-81	s	RES, CHIP 47 (1005)
R150	1-208-855-81	s	RES, CHIP 47 (1005)
R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R162	1-208-855-81	s	RES, CHIP 47 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-855-81	s	RES, CHIP 47 (1005)
R165	1-208-855-81	s	RES, CHIP 47 (1005)
R166	1-208-855-81	s	RES, CHIP 47 (1005)
R167	1-208-855-81	s	RES, CHIP 47 (1005)
R168	1-208-855-81	s	RES, CHIP 47 (1005)
R169	1-208-855-81	s	RES, CHIP 47 (1005)
R170	1-208-855-81	s	RES, CHIP 47 (1005)
R171	1-208-855-81	s	RES, CHIP 47 (1005)
R172	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-208-855-81	s	RES, CHIP 47 (1005)
R174	1-208-855-81	s	RES, CHIP 47 (1005)
R175	1-208-855-81	s	RES, CHIP 47 (1005)
R176	1-208-855-81	s	RES, CHIP 47 (1005)
R177	1-208-855-81	s	RES, CHIP 47 (1005)
R178	1-208-855-81	s	RES, CHIP 47 (1005)
R179	1-208-855-81	s	RES, CHIP 47 (1005)
R180	1-208-855-81	s	RES, CHIP 47 (1005)
R181	1-208-855-81	s	RES, CHIP 47 (1005)
R182	1-208-855-81	s	RES, CHIP 47 (1005)
R183	1-208-855-81	s	RES, CHIP 47 (1005)
R184	1-220-870-81	s	RES, CHIP 10 (1005)
R185	1-220-870-81	s	RES, CHIP 10 (1005)
R186	1-220-870-81	s	RES, CHIP 10 (1005)
R187	1-220-870-81	s	RES, CHIP 10 (1005)
R188	1-220-870-81	s	RES, CHIP 10 (1005)
R189	1-220-870-81	s	RES, CHIP 10 (1005)
R190	1-220-870-81	s	RES, CHIP 10 (1005)
R191	1-220-870-81	s	RES, CHIP 10 (1005)
R192	1-220-870-81	s	RES, CHIP 10 (1005)
R193	1-220-870-81	s	RES, CHIP 10 (1005)
R194	1-220-870-81	s	RES, CHIP 10 (1005)
R195	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-871-81	s	RES, CHIP 220 (1005)
R207	1-208-871-81	s	RES, CHIP 220 (1005)
R208	1-208-857-81	s	RES, CHIP 56 (1005)
R209	1-208-857-81	s	RES, CHIP 56 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)
R222	1-208-875-81	s	RES, CHIP 330 (1005)
R223	1-208-875-81	s	RES, CHIP 330 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R224	1-208-875-81	s	RES, CHIP 330 (1005)
R225	1-208-875-81	s	RES, CHIP 330 (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-855-81	s	RES, CHIP 47 (1005)
R241	1-208-927-81	s	RES, CHIP 47K (1005)
R244	1-208-855-81	s	RES, CHIP 47 (1005)
R245	1-208-855-81	s	RES, CHIP 47 (1005)
R248	1-208-911-81	s	RES, CHIP 10K (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R251	1-208-911-81	s	RES, CHIP 10K (1005)
R254	1-208-882-81	s	RES, CHIP 620 (1005)
R256	1-208-882-81	s	RES, CHIP 620 (1005)
R258	1-208-860-81	s	RES, CHIP 75 (1005)
R260	1-208-860-81	s	RES, CHIP 75 (1005)
R261	1-208-860-81	s	RES, CHIP 75 (1005)
R264	1-208-860-81	s	RES, CHIP 75 (1005)
R266	1-208-875-81	s	RES, CHIP 330 (1005)
R267	1-208-875-81	s	RES, CHIP 330 (1005)
R270	1-208-875-81	s	RES, CHIP 330 (1005)
R271	1-208-875-81	s	RES, CHIP 330 (1005)
R274	1-208-873-81	s	RES, CHIP 270 (1005)
R276	1-208-873-81	s	RES, CHIP 270 (1005)
R278	1-208-873-81	s	RES, CHIP 270 (1005)
R280	1-208-873-81	s	RES, CHIP 270 (1005)
R282	1-220-878-81	s	RES, CHIP 22 (1005)
R283	1-220-878-81	s	RES, CHIP 22 (1005)
R284	1-220-878-81	s	RES, CHIP 22 (1005)
R285	1-220-878-81	s	RES, CHIP 22 (1005)
R286	1-220-878-81	s	RES, CHIP 22 (1005)
R287	1-220-878-81	s	RES, CHIP 22 (1005)
R288	1-220-878-81	s	RES, CHIP 22 (1005)
R289	1-220-878-81	s	RES, CHIP 22 (1005)
R290	1-208-927-81	s	RES, CHIP 47K (1005)
R291	1-208-927-81	s	RES, CHIP 47K (1005)
R292	1-208-855-81	s	RES, CHIP 47 (1005)
R293	1-208-927-81	s	RES, CHIP 47K (1005)
R294	1-208-927-81	s	RES, CHIP 47K (1005)
R295	1-208-855-81	s	RES, CHIP 47 (1005)
R296	1-208-855-81	s	RES, CHIP 47 (1005)
R297	1-208-855-81	s	RES, CHIP 47 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R299	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-911-81	s	RES, CHIP 10K (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-911-81	s	RES, CHIP 10K (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-882-81	s	RES, CHIP 620 (1005)
R307	1-208-882-81	s	RES, CHIP 620 (1005)
R308	1-208-882-81	s	RES, CHIP 620 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R309	1-208-882-81	s	RES, CHIP 620 (1005)
R310	1-208-860-81	s	RES, CHIP 75 (1005)
R311	1-208-860-81	s	RES, CHIP 75 (1005)
R312	1-208-860-81	s	RES, CHIP 75 (1005)
R313	1-208-860-81	s	RES, CHIP 75 (1005)
R314	1-208-860-81	s	RES, CHIP 75 (1005)
R315	1-208-860-81	s	RES, CHIP 75 (1005)
R316	1-208-860-81	s	RES, CHIP 75 (1005)
R317	1-208-860-81	s	RES, CHIP 75 (1005)
R318	1-208-877-81	s	RES, CHIP 390 (1005)
R320	1-208-877-81	s	RES, CHIP 390 (1005)
R322	1-208-877-81	s	RES, CHIP 390 (1005)
R324	1-208-877-81	s	RES, CHIP 390 (1005)
R325	1-208-877-81	s	RES, CHIP 390 (1005)
R326	1-208-873-81	s	RES, CHIP 270 (1005)
R327	1-208-873-81	s	RES, CHIP 270 (1005)
R328	1-208-873-81	s	RES, CHIP 270 (1005)
R329	1-208-873-81	s	RES, CHIP 270 (1005)
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-220-878-81	s	RES, CHIP 22 (1005)
R338	1-220-878-81	s	RES, CHIP 22 (1005)
R339	1-220-878-81	s	RES, CHIP 22 (1005)
R346	1-208-927-81	s	RES, CHIP 47K (1005)
R347	1-208-855-81	s	RES, CHIP 47 (1005)
R348	1-208-927-81	s	RES, CHIP 47K (1005)
R349	1-208-855-81	s	RES, CHIP 47 (1005)
R350	1-208-855-81	s	RES, CHIP 47 (1005)
R352	1-208-911-81	s	RES, CHIP 10K (1005)
R354	1-208-855-81	s	RES, CHIP 47 (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)
R358	1-208-883-81	s	RES, CHIP 680 (1005)
R359	1-208-883-81	s	RES, CHIP 680 (1005)
R361	1-208-860-81	s	RES, CHIP 75 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-860-81	s	RES, CHIP 75 (1005)
R365	1-208-860-81	s	RES, CHIP 75 (1005)
R367	1-208-871-81	s	RES, CHIP 220 (1005)
R368	1-208-871-81	s	RES, CHIP 220 (1005)
R369	1-208-871-81	s	RES, CHIP 220 (1005)
R370	1-208-871-81	s	RES, CHIP 220 (1005)
R373	1-208-911-81	s	RES, CHIP 10K (1005)
R374	1-208-911-81	s	RES, CHIP 10K (1005)
R376	1-208-911-81	s	RES, CHIP 10K (1005)
R377	1-208-860-81	s	RES, CHIP 75 (1005)
R379	1-208-889-81	s	RES, CHIP 1.2K (1005)
R380	1-208-895-81	s	RES, CHIP 2.2K (1005)
R381	1-208-887-81	s	RES, CHIP 1.0K (1005)
R383	1-208-889-81	s	RES, CHIP 1.2K (1005)
R384	1-208-895-81	s	RES, CHIP 2.2K (1005)
R385	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-208-867-81	s	RES, CHIP 150 (1005)
R404	1-208-861-81	s	RES, CHIP 82 (1005)
R405	1-208-867-81	s	RES, CHIP 150 (1005)
R406	1-208-861-81	s	RES, CHIP 82 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R409	1-208-869-81	s	RES, CHIP 180 (1005)
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-208-863-81	s	RES, CHIP 100 (1005)
R414	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	1-208-887-81	s	RES, CHIP 1.0K (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-867-81	s	RES, CHIP 150 (1005)
R433	1-208-861-81	s	RES, CHIP 82 (1005)
R434	1-208-867-81	s	RES, CHIP 150 (1005)
R435	1-208-861-81	s	RES, CHIP 82 (1005)
R436	1-208-911-81	s	RES, CHIP 10K (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)
R438	1-208-869-81	s	RES, CHIP 180 (1005)
R439	1-208-911-81	s	RES, CHIP 10K (1005)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-871-81	s	RES, CHIP 220 (1005)
R506	1-208-871-81	s	RES, CHIP 220 (1005)
R507	1-208-871-81	s	RES, CHIP 220 (1005)
R508	1-208-871-81	s	RES, CHIP 220 (1005)
R509	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-859-81	s	RES, CHIP 68 (1005)
R515	1-208-859-81	s	RES, CHIP 68 (1005)
R516	1-208-859-81	s	RES, CHIP 68 (1005)
R517	1-208-859-81	s	RES, CHIP 68 (1005)
R518	1-208-859-81	s	RES, CHIP 68 (1005)
R519	1-208-859-81	s	RES, CHIP 68 (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R600	1-208-863-81	s	RES, CHIP 100 (1005)
R601	1-208-867-81	s	RES, CHIP 150 (1005)
R602	1-208-861-81	s	RES, CHIP 82 (1005)
R604	1-208-867-81	s	RES, CHIP 150 (1005)
R605	1-208-861-81	s	RES, CHIP 82 (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-911-81	s	RES, CHIP 10K (1005)
R612	1-208-911-81	s	RES, CHIP 10K (1005)
R613	1-208-911-81	s	RES, CHIP 10K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R616	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R618	1-208-911-81	s	RES, CHIP 10K (1005)
R619	1-208-911-81	s	RES, CHIP 10K (1005)
R620	1-208-911-81	s	RES, CHIP 10K (1005)
R621	1-208-911-81	s	RES, CHIP 10K (1005)
R622	1-208-911-81	s	RES, CHIP 10K (1005)
R623	1-208-911-81	s	RES, CHIP 10K (1005)
R624	1-208-911-81	s	RES, CHIP 10K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-911-81	s	RES, CHIP 10K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-911-81	s	RES, CHIP 10K (1005)
R630	1-208-911-81	s	RES, CHIP 10K (1005)
R631	1-208-911-81	s	RES, CHIP 10K (1005)
R632	1-208-911-81	s	RES, CHIP 10K (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-894-81	s	RES, CHIP 2.0K (1005)
R636	1-208-894-81	s	RES, CHIP 2.0K (1005)
R637	1-208-894-81	s	RES, CHIP 2.0K (1005)
R638	1-208-894-81	s	RES, CHIP 2.0K (1005)
R639	1-208-911-81	s	RES, CHIP 10K (1005)
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-911-81	s	RES, CHIP 10K (1005)
R643	1-208-911-81	s	RES, CHIP 10K (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)
R645	1-208-911-81	s	RES, CHIP 10K (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-911-81	s	RES, CHIP 10K (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-208-911-81	s	RES, CHIP 10K (1005)
R652	1-208-911-81	s	RES, CHIP 10K (1005)
R653	1-208-911-81	s	RES, CHIP 10K (1005)
R654	1-208-911-81	s	RES, CHIP 10K (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R656	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-911-81	s	RES, CHIP 10K (1005)
R658	1-208-911-81	s	RES, CHIP 10K (1005)
R659	1-208-911-81	s	RES, CHIP 10K (1005)
R660	1-208-911-81	s	RES, CHIP 10K (1005)
R661	1-208-911-81	s	RES, CHIP 10K (1005)
R662	1-208-911-81	s	RES, CHIP 10K (1005)
R663	1-208-911-81	s	RES, CHIP 10K (1005)
R664	1-208-911-81	s	RES, CHIP 10K (1005)
R665	1-208-911-81	s	RES, CHIP 10K (1005)
R666	1-208-911-81	s	RES, CHIP 10K (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R669	1-208-883-81	s	RES, CHIP 680 (1005)
R670	1-208-861-81	s	RES, CHIP 82 (1005)
R671	1-208-861-81	s	RES, CHIP 82 (1005)
R672	1-208-911-81	s	RES, CHIP 10K (1005)
R674	1-208-859-81	s	RES, CHIP 68 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R676	1-208-859-81	s	RES, CHIP 68 (1005)
R677	1-208-859-81	s	RES, CHIP 68 (1005)
R678	1-208-859-81	s	RES, CHIP 68 (1005)
R679	1-208-887-81	s	RES, CHIP 1.0K (1005)
R680	1-208-887-81	s	RES, CHIP 1.0K (1005)
R681	1-208-887-81	s	RES, CHIP 1.0K (1005)
R682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R683	1-208-855-81	s	RES, CHIP 47 (1005)
R684	1-208-855-81	s	RES, CHIP 47 (1005)
R685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R687	1-208-887-81	s	RES, CHIP 1.0K (1005)
R688	1-208-887-81	s	RES, CHIP 1.0K (1005)
R690	1-208-887-81	s	RES, CHIP 1.0K (1005)
R691	1-208-887-81	s	RES, CHIP 1.0K (1005)
R692	1-208-887-81	s	RES, CHIP 1.0K (1005)
R693	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R694	1-208-859-81	s	RES, CHIP 68 (1005)
R695	1-208-855-81	s	RES, CHIP 47 (1005)
R696	1-208-855-81	s	RES, CHIP 47 (1005)
R697	1-208-887-81	s	RES, CHIP 1.0K (1005)
R698	1-208-887-81	s	RES, CHIP 1.0K (1005)
R699	1-208-887-81	s	RES, CHIP 1.0K (1005)
R700	1-208-887-81	s	RES, CHIP 1.0K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R714	1-208-887-81	s	RES, CHIP 1.0K (1005)
R715	1-208-887-81	s	RES, CHIP 1.0K (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R719	1-208-911-81	s	RES, CHIP 10K (1005)
R721	1-208-887-81	s	RES, CHIP 1.0K (1005)
R723	1-208-911-81	s	RES, CHIP 10K (1005)
R725	1-208-911-81	s	RES, CHIP 10K (1005)
R727	1-208-911-81	s	RES, CHIP 10K (1005)
R728	1-208-911-81	s	RES, CHIP 10K (1005)
R729	1-208-887-81	s	RES, CHIP 1.0K (1005)
R730	1-208-855-81	s	RES, CHIP 47 (1005)
R731	1-208-855-81	s	RES, CHIP 47 (1005)
R732	1-208-855-81	s	RES, CHIP 47 (1005)
R733	1-208-855-81	s	RES, CHIP 47 (1005)
R734	1-208-911-81	s	RES, CHIP 10K (1005)
R735	1-208-855-81	s	RES, CHIP 47 (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-911-81	s	RES, CHIP 10K (1005)
R738	1-208-911-81	s	RES, CHIP 10K (1005)
R739	1-208-911-81	s	RES, CHIP 10K (1005)
R740	1-208-911-81	s	RES, CHIP 10K (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R742	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R743	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R744	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-208-863-81	s	RES, CHIP 100 (1005)
R748	1-208-859-81	s	RES, CHIP 68 (1005)
R749	1-208-859-81	s	RES, CHIP 68 (1005)
R750	1-208-861-81	s	RES, CHIP 82 (1005)
R751	1-208-861-81	s	RES, CHIP 82 (1005)
R948	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R949	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R951	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R968	1-208-871-81	s	RES, CHIP 220 (1005)
R969	1-208-871-81	s	RES, CHIP 220 (1005)
R970	1-208-871-81	s	RES, CHIP 220 (1005)
R971	1-208-871-81	s	RES, CHIP 220 (1005)
R1027	1-220-878-81	s	RES, CHIP 22 (1005)
R1032	1-220-882-81	s	RES, CHIP 33 (1005)
R1033	1-220-882-81	s	RES, CHIP 33 (1005)
R1034	1-220-882-81	s	RES, CHIP 33 (1005)
R1035	1-220-882-81	s	RES, CHIP 33 (1005)
R1036	1-220-882-81	s	RES, CHIP 33 (1005)
R1037	1-220-882-81	s	RES, CHIP 33 (1005)
R1038	1-220-882-81	s	RES, CHIP 33 (1005)
R1039	1-220-882-81	s	RES, CHIP 33 (1005)
R1040	1-220-882-81	s	RES, CHIP 33 (1005)
R1041	1-220-882-81	s	RES, CHIP 33 (1005)
R1042	1-208-860-81	s	RES, CHIP 75 (1005)
R1043	1-208-860-81	s	RES, CHIP 75 (1005)
R1044	1-208-860-81	s	RES, CHIP 75 (1005)
R1045	1-208-860-81	s	RES, CHIP 75 (1005)
R1046	1-208-860-81	s	RES, CHIP 75 (1005)
R1047	1-208-860-81	s	RES, CHIP 75 (1005)
R1056	1-220-882-81	s	RES, CHIP 33 (1005)
R1057	1-220-882-81	s	RES, CHIP 33 (1005)
R1058	1-208-911-81	s	RES, CHIP 10K (1005)
R1100	1-208-855-81	s	RES, CHIP 47 (1005)
R1101	1-208-855-81	s	RES, CHIP 47 (1005)
R1102	1-208-855-81	s	RES, CHIP 47 (1005)
R1103	1-208-855-81	s	RES, CHIP 47 (1005)
R1104	1-208-855-81	s	RES, CHIP 47 (1005)
R1105	1-208-855-81	s	RES, CHIP 47 (1005)
R1106	1-208-855-81	s	RES, CHIP 47 (1005)
R1107	1-208-855-81	s	RES, CHIP 47 (1005)
R1108	1-208-855-81	s	RES, CHIP 47 (1005)
R1109	1-208-855-81	s	RES, CHIP 47 (1005)
R1110	1-208-855-81	s	RES, CHIP 47 (1005)
R1111	1-208-855-81	s	RES, CHIP 47 (1005)
R1113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1114	1-220-870-81	s	RES, CHIP 10 (1005)
R1115	1-220-870-81	s	RES, CHIP 10 (1005)
R1116	1-220-870-81	s	RES, CHIP 10 (1005)
R1117	1-220-870-81	s	RES, CHIP 10 (1005)
R1118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1119	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1120	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1121	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1122	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1126	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1133	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1138	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1139	1-208-855-81	s	RES, CHIP 47 (1005)
R1140	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1141	1-208-855-81	s	RES, CHIP 47 (1005)
R1142	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1143	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1144	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1146	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1148	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1149	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1150	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1154	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1155	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1156	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1157	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1158	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1159	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1160	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1161	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1162	1-220-870-81	s	RES, CHIP 10 (1005)
R1163	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1174	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1175	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1176	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1177	1-208-911-81	s	RES, CHIP 10K (1005)
R1178	1-208-855-81	s	RES, CHIP 47 (1005)
R1179	1-208-855-81	s	RES, CHIP 47 (1005)
R1180	1-208-855-81	s	RES, CHIP 47 (1005)
R1181	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1182	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1183	1-208-855-81	s	RES, CHIP 47 (1005)
R1184	1-208-855-81	s	RES, CHIP 47 (1005)
R1185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1191	1-208-911-81	s	RES, CHIP 10K (1005)
R1192	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1194	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1195	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1196	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-208-855-81	s	RES, CHIP 47 (1005)
R1204	1-208-855-81	s	RES, CHIP 47 (1005)
R1205	1-208-855-81	s	RES, CHIP 47 (1005)
R1206	1-208-855-81	s	RES, CHIP 47 (1005)
R1207	1-208-855-81	s	RES, CHIP 47 (1005)
R1208	1-208-855-81	s	RES, CHIP 47 (1005)
R1209	1-208-855-81	s	RES, CHIP 47 (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)
R1212	1-220-870-81	s	RES, CHIP 10 (1005)
R1213	1-220-870-81	s	RES, CHIP 10 (1005)
R1216	1-208-911-81	s	RES, CHIP 10K (1005)
R1217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1219	1-208-911-81	s	RES, CHIP 10K (1005)
R1300	1-220-878-81	s	RES, CHIP 22 (1005)
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1302	1-208-863-81	s	RES, CHIP 100 (1005)
R1303	1-208-855-81	s	RES, CHIP 47 (1005)
R1304	1-208-855-81	s	RES, CHIP 47 (1005)
R1305	1-208-935-81	s	RES, CHIP 100K (1005)
R1306	1-208-935-81	s	RES, CHIP 100K (1005)
R1307	1-208-935-81	s	RES, CHIP 100K (1005)
R1308	1-208-855-81	s	RES, CHIP 47 (1005)
R1309	1-208-855-81	s	RES, CHIP 47 (1005)
R1310	1-208-935-81	s	RES, CHIP 100K (1005)
R1311	1-208-855-81	s	RES, CHIP 47 (1005)
R1312	1-208-855-81	s	RES, CHIP 47 (1005)
R1313	1-208-935-81	s	RES, CHIP 100K (1005)
R1314	1-220-878-81	s	RES, CHIP 22 (1005)
R1315	1-220-878-81	s	RES, CHIP 22 (1005)
R1316	1-208-863-81	s	RES, CHIP 100 (1005)
R1317	1-220-882-81	s	RES, CHIP 33 (1005)
R1318	1-220-882-81	s	RES, CHIP 33 (1005)
R1321	1-208-935-81	s	RES, CHIP 100K (1005)
R1322	1-220-882-81	s	RES, CHIP 33 (1005)
R1323	1-220-882-81	s	RES, CHIP 33 (1005)
R1324	1-208-935-81	s	RES, CHIP 100K (1005)
R1325	1-220-882-81	s	RES, CHIP 33 (1005)
R1326	1-220-882-81	s	RES, CHIP 33 (1005)
R1327	1-208-935-81	s	RES, CHIP 100K (1005)
R1328	1-220-878-81	s	RES, CHIP 22 (1005)
R1329	1-220-878-81	s	RES, CHIP 22 (1005)
R1330	1-220-878-81	s	RES, CHIP 22 (1005)
R1331	1-220-878-81	s	RES, CHIP 22 (1005)
R1332	1-208-863-81	s	RES, CHIP 100 (1005)
R1333	1-208-863-81	s	RES, CHIP 100 (1005)
R1334	1-220-878-81	s	RES, CHIP 22 (1005)
R1335	1-220-878-81	s	RES, CHIP 22 (1005)
R1336	1-220-878-81	s	RES, CHIP 22 (1005)
R1337	1-220-878-81	s	RES, CHIP 22 (1005)
R1338	1-208-863-81	s	RES, CHIP 100 (1005)
R1339	1-208-863-81	s	RES, CHIP 100 (1005)
R1448	1-208-863-81	s	RES, CHIP 100 (1005)
R1449	1-208-863-81	s	RES, CHIP 100 (1005)
R1450	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1451	1-208-863-81	s	RES, CHIP 100 (1005)
R1452	1-208-871-81	s	RES, CHIP 220 (1005)
R1453	1-208-871-81	s	RES, CHIP 220 (1005)
R1454	1-208-871-81	s	RES, CHIP 220 (1005)
R1455	1-208-871-81	s	RES, CHIP 220 (1005)
R1456	1-208-911-81	s	RES, CHIP 10K (1005)
R1501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1504	1-208-911-81	s	RES, CHIP 10K (1005)
R1505	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1512	1-220-878-81	s	RES, CHIP 22 (1005)
R1513	1-220-878-81	s	RES, CHIP 22 (1005)
R1514	1-220-878-81	s	RES, CHIP 22 (1005)
R1515	1-220-878-81	s	RES, CHIP 22 (1005)
R1516	1-220-878-81	s	RES, CHIP 22 (1005)
R1517	1-208-867-81	s	RES, CHIP 150 (1005)
R1519	1-220-878-81	s	RES, CHIP 22 (1005)
R1520	1-220-878-81	s	RES, CHIP 22 (1005)
R1521	1-220-878-81	s	RES, CHIP 22 (1005)
R1522	1-220-878-81	s	RES, CHIP 22 (1005)
R1523	1-220-878-81	s	RES, CHIP 22 (1005)
R1524	1-208-867-81	s	RES, CHIP 150 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1600	1-208-875-81	s	RES, CHIP 330 (1005)
R1601	1-208-875-81	s	RES, CHIP 330 (1005)
R1602	1-208-875-81	s	RES, CHIP 330 (1005)
R1603	1-208-875-81	s	RES, CHIP 330 (1005)
R1604	1-208-875-81	s	RES, CHIP 330 (1005)
R1605	1-208-875-81	s	RES, CHIP 330 (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1619	1-208-911-81	s	RES, CHIP 10K (1005)
R1620	1-208-911-81	s	RES, CHIP 10K (1005)
R1621	1-208-911-81	s	RES, CHIP 10K (1005)
R1622	1-208-911-81	s	RES, CHIP 10K (1005)
R1623	1-208-911-81	s	RES, CHIP 10K (1005)
R1624	1-208-911-81	s	RES, CHIP 10K (1005)
R1625	1-208-911-81	s	RES, CHIP 10K (1005)
R1626	1-208-911-81	s	RES, CHIP 10K (1005)
R1627	1-208-911-81	s	RES, CHIP 10K (1005)
R1628	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1629	1-208-911-81	s	RES, CHIP 10K (1005)
R1630	1-208-911-81	s	RES, CHIP 10K (1005)
R1631	1-208-911-81	s	RES, CHIP 10K (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-911-81	s	RES, CHIP 10K (1005)
R1634	1-208-911-81	s	RES, CHIP 10K (1005)
R1635	1-208-911-81	s	RES, CHIP 10K (1005)
R1636	1-208-911-81	s	RES, CHIP 10K (1005)
R1637	1-208-911-81	s	RES, CHIP 10K (1005)
R1638	1-208-911-81	s	RES, CHIP 10K (1005)
R1639	1-208-911-81	s	RES, CHIP 10K (1005)
R1640	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1641	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1642	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1643	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1644	1-208-911-81	s	RES, CHIP 10K (1005)
R1645	1-208-911-81	s	RES, CHIP 10K (1005)
R1646	1-208-911-81	s	RES, CHIP 10K (1005)
R1647	1-208-911-81	s	RES, CHIP 10K (1005)
R1648	1-208-911-81	s	RES, CHIP 10K (1005)
R1649	1-208-911-81	s	RES, CHIP 10K (1005)
R1650	1-208-911-81	s	RES, CHIP 10K (1005)
R1651	1-208-911-81	s	RES, CHIP 10K (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-208-911-81	s	RES, CHIP 10K (1005)
R1655	1-208-911-81	s	RES, CHIP 10K (1005)
R1656	1-208-911-81	s	RES, CHIP 10K (1005)
R1657	1-208-911-81	s	RES, CHIP 10K (1005)
R1658	1-208-861-81	s	RES, CHIP 82 (1005)
R1659	1-208-859-81	s	RES, CHIP 68 (1005)
R1660	1-208-859-81	s	RES, CHIP 68 (1005)
R1661	1-208-861-81	s	RES, CHIP 82 (1005)
R1662	1-208-859-81	s	RES, CHIP 68 (1005)
R1663	1-208-859-81	s	RES, CHIP 68 (1005)
R1664	1-208-861-81	s	RES, CHIP 82 (1005)
R1665	1-208-859-81	s	RES, CHIP 68 (1005)
R1666	1-208-859-81	s	RES, CHIP 68 (1005)
R1667	1-208-861-81	s	RES, CHIP 82 (1005)
R1668	1-208-859-81	s	RES, CHIP 68 (1005)
R1669	1-208-859-81	s	RES, CHIP 68 (1005)
R1670	1-208-855-81	s	RES, CHIP 47 (1005)
R1671	1-208-855-81	s	RES, CHIP 47 (1005)
R1672	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1673	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1674	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1675	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1678	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1679	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1680	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1681	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1683	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1684	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1687	1-220-870-81	s	RES, CHIP 10 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1688	1-220-870-81	s	RES, CHIP 10 (1005)
R1689	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1690	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1691	1-220-870-81	s	RES, CHIP 10 (1005)
R1692	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1693	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1694	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1695	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1696	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1697	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1698	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1699	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1700	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1701	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1702	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1704	1-208-911-81	s	RES, CHIP 10K (1005)
R1706	1-208-911-81	s	RES, CHIP 10K (1005)
R1708	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1710	1-208-911-81	s	RES, CHIP 10K (1005)
R1712	1-208-911-81	s	RES, CHIP 10K (1005)
R1714	1-208-911-81	s	RES, CHIP 10K (1005)
R1715	1-208-911-81	s	RES, CHIP 10K (1005)
R1716	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1717	1-208-855-81	s	RES, CHIP 47 (1005)
R1718	1-208-855-81	s	RES, CHIP 47 (1005)
R1719	1-208-855-81	s	RES, CHIP 47 (1005)
R1720	1-208-855-81	s	RES, CHIP 47 (1005)
R1721	1-208-911-81	s	RES, CHIP 10K (1005)
R1722	1-208-911-81	s	RES, CHIP 10K (1005)
R1723	1-208-855-81	s	RES, CHIP 47 (1005)
R1724	1-208-911-81	s	RES, CHIP 10K (1005)
R1725	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1726	1-208-911-81	s	RES, CHIP 10K (1005)
R1727	1-208-911-81	s	RES, CHIP 10K (1005)
R1728	1-208-911-81	s	RES, CHIP 10K (1005)
R1729	1-208-911-81	s	RES, CHIP 10K (1005)
R1730	1-208-911-81	s	RES, CHIP 10K (1005)
R1731	1-208-911-81	s	RES, CHIP 10K (1005)
R1900	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-855-81	s	RES, CHIP 47 (1005)
R1902	1-208-855-81	s	RES, CHIP 47 (1005)
R1903	1-208-855-81	s	RES, CHIP 47 (1005)
R1904	1-208-855-81	s	RES, CHIP 47 (1005)
R1905	1-208-855-81	s	RES, CHIP 47 (1005)
R1906	1-208-855-81	s	RES, CHIP 47 (1005)
R1907	1-208-855-81	s	RES, CHIP 47 (1005)
R1908	1-208-855-81	s	RES, CHIP 47 (1005)
R1909	1-208-855-81	s	RES, CHIP 47 (1005)
R1910	1-208-855-81	s	RES, CHIP 47 (1005)
R1911	1-208-855-81	s	RES, CHIP 47 (1005)
R1912	1-208-871-81	s	RES, CHIP 220 (1005)
R1913	1-208-871-81	s	RES, CHIP 220 (1005)
R1914	1-208-871-81	s	RES, CHIP 220 (1005)
R1915	1-208-871-81	s	RES, CHIP 220 (1005)
R1916	1-208-863-81	s	RES, CHIP 100 (1005)
R1917	1-208-863-81	s	RES, CHIP 100 (1005)
R1918	1-208-863-81	s	RES, CHIP 100 (1005)
R1919	1-208-863-81	s	RES, CHIP 100 (1005)
R1920	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1921	1-208-855-81	s	RES, CHIP 47 (1005)
R1922	1-208-911-81	s	RES, CHIP 10K (1005)
R1923	1-208-911-81	s	RES, CHIP 10K (1005)
R1924	1-208-911-81	s	RES, CHIP 10K (1005)
R1925	1-208-911-81	s	RES, CHIP 10K (1005)
R1926	1-208-911-81	s	RES, CHIP 10K (1005)
R1927	1-208-911-81	s	RES, CHIP 10K (1005)
R1928	1-208-911-81	s	RES, CHIP 10K (1005)
R1929	1-208-911-81	s	RES, CHIP 10K (1005)
R1930	1-208-911-81	s	RES, CHIP 10K (1005)
R1931	1-208-911-81	s	RES, CHIP 10K (1005)
R1932	1-208-911-81	s	RES, CHIP 10K (1005)
R1933	1-208-911-81	s	RES, CHIP 10K (1005)
R1934	1-208-911-81	s	RES, CHIP 10K (1005)
R1935	1-208-911-81	s	RES, CHIP 10K (1005)
R1936	1-208-911-81	s	RES, CHIP 10K (1005)
R1937	1-208-911-81	s	RES, CHIP 10K (1005)
R1938	1-208-911-81	s	RES, CHIP 10K (1005)
R1939	1-208-911-81	s	RES, CHIP 10K (1005)
R1940	1-208-911-81	s	RES, CHIP 10K (1005)
R1941	1-208-911-81	s	RES, CHIP 10K (1005)
R1942	1-208-911-81	s	RES, CHIP 10K (1005)
R1943	1-208-911-81	s	RES, CHIP 10K (1005)
R1944	1-208-911-81	s	RES, CHIP 10K (1005)
R1945	1-208-911-81	s	RES, CHIP 10K (1005)
R1946	1-208-911-81	s	RES, CHIP 10K (1005)
R1947	1-208-911-81	s	RES, CHIP 10K (1005)
R1948	1-208-911-81	s	RES, CHIP 10K (1005)
R1949	1-208-911-81	s	RES, CHIP 10K (1005)
R1950	1-208-911-81	s	RES, CHIP 10K (1005)
R1951	1-208-911-81	s	RES, CHIP 10K (1005)
R1952	1-208-911-81	s	RES, CHIP 10K (1005)
R1953	1-208-911-81	s	RES, CHIP 10K (1005)
R1954	1-208-911-81	s	RES, CHIP 10K (1005)
R1955	1-208-911-81	s	RES, CHIP 10K (1005)
R1956	1-208-911-81	s	RES, CHIP 10K (1005)
R1957	1-208-911-81	s	RES, CHIP 10K (1005)
R1958	1-208-911-81	s	RES, CHIP 10K (1005)
R1959	1-208-911-81	s	RES, CHIP 10K (1005)
R1960	1-208-911-81	s	RES, CHIP 10K (1005)
R1961	1-208-911-81	s	RES, CHIP 10K (1005)
R1962	1-208-911-81	s	RES, CHIP 10K (1005)
R1963	1-208-855-81	s	RES, CHIP 47 (1005)
R1964	1-208-855-81	s	RES, CHIP 47 (1005)
R1965	1-208-855-81	s	RES, CHIP 47 (1005)
R1966	1-208-855-81	s	RES, CHIP 47 (1005)
R1967	1-208-855-81	s	RES, CHIP 47 (1005)
R1968	1-208-855-81	s	RES, CHIP 47 (1005)
R1969	1-208-855-81	s	RES, CHIP 47 (1005)
R1970	1-208-855-81	s	RES, CHIP 47 (1005)
R2000	1-208-861-81	s	RES, CHIP 82 (1005)
R2001	1-208-861-81	s	RES, CHIP 82 (1005)
R2002	1-208-859-81	s	RES, CHIP 68 (1005)
R2003	1-208-859-81	s	RES, CHIP 68 (1005)
R2005	1-208-855-81	s	RES, CHIP 47 (1005)
R2006	1-208-859-81	s	RES, CHIP 68 (1005)
R2007	1-208-855-81	s	RES, CHIP 47 (1005)
R2008	1-208-859-81	s	RES, CHIP 68 (1005)
R2011	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2016	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2017	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2018	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-220-870-81	s	RES, CHIP 10 (1005)
R2040	1-220-870-81	s	RES, CHIP 10 (1005)
R2041	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2042	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2043	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2044	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2045	1-220-870-81	s	RES, CHIP 10 (1005)
R2046	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2059	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2061	1-208-855-81	s	RES, CHIP 47 (1005)
R2062	1-208-855-81	s	RES, CHIP 47 (1005)
R2063	1-208-855-81	s	RES, CHIP 47 (1005)
R2064	1-208-855-81	s	RES, CHIP 47 (1005)
R2065	1-208-911-81	s	RES, CHIP 10K (1005)
R2070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2076	1-208-911-81	s	RES, CHIP 10K (1005)
R2080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-220-878-81	s	RES, CHIP 22 (1005)
R2109	1-220-878-81	s	RES, CHIP 22 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-855-81	s	RES, CHIP 47 (1005)
R2114	1-208-863-81	s	RES, CHIP 100 (1005)
R2115	1-208-863-81	s	RES, CHIP 100 (1005)
R2116	1-208-863-81	s	RES, CHIP 100 (1005)
R2117	1-208-863-81	s	RES, CHIP 100 (1005)
R2118	1-208-863-81	s	RES, CHIP 100 (1005)
R2119	1-208-863-81	s	RES, CHIP 100 (1005)
R2120	1-208-863-81	s	RES, CHIP 100 (1005)
R2121	1-208-863-81	s	RES, CHIP 100 (1005)
R2122	1-208-863-81	s	RES, CHIP 100 (1005)
R2123	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2124	1-208-863-81	s	RES, CHIP 100 (1005)
R2125	1-208-863-81	s	RES, CHIP 100 (1005)
R2126	1-208-863-81	s	RES, CHIP 100 (1005)
R2127	1-208-863-81	s	RES, CHIP 100 (1005)
R2128	1-208-863-81	s	RES, CHIP 100 (1005)
R2129	1-208-863-81	s	RES, CHIP 100 (1005)
R2130	1-208-863-81	s	RES, CHIP 100 (1005)
R2131	1-208-863-81	s	RES, CHIP 100 (1005)
R2132	1-208-863-81	s	RES, CHIP 100 (1005)
R2133	1-208-863-81	s	RES, CHIP 100 (1005)
R2134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2139	1-208-911-81	s	RES, CHIP 10K (1005)
R2142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2145	1-208-911-81	s	RES, CHIP 10K (1005)
R2146	1-208-911-81	s	RES, CHIP 10K (1005)
R2147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2148	1-208-911-81	s	RES, CHIP 10K (1005)
R2149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2150	1-208-911-81	s	RES, CHIP 10K (1005)
R2152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2157	1-208-935-81	s	RES, CHIP 100K (1005)
R2158	1-208-935-81	s	RES, CHIP 100K (1005)
R2159	1-208-855-81	s	RES, CHIP 47 (1005)
R2160	1-208-855-81	s	RES, CHIP 47 (1005)
R2161	1-208-855-81	s	RES, CHIP 47 (1005)
R2162	1-208-855-81	s	RES, CHIP 47 (1005)
R2163	1-208-855-81	s	RES, CHIP 47 (1005)
R2200	1-208-935-81	s	RES, CHIP 100K (1005)
R2201	1-208-935-81	s	RES, CHIP 100K (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-927-81	s	RES, CHIP 47K (1005)
R2205	1-208-927-81	s	RES, CHIP 47K (1005)
R2206	1-208-863-81	s	RES, CHIP 100 (1005)
R2207	1-208-863-81	s	RES, CHIP 100 (1005)
R2208	1-208-935-81	s	RES, CHIP 100K (1005)
R2211	1-208-935-81	s	RES, CHIP 100K (1005)
R2214	1-208-881-81	s	RES, CHIP 560 (1005)
R2215	1-208-935-81	s	RES, CHIP 100K (1005)
R2216	1-208-881-81	s	RES, CHIP 560 (1005)
R2217	1-208-935-81	s	RES, CHIP 100K (1005)
R2220	1-208-871-81	s	RES, CHIP 220 (1005)
R2221	1-208-870-81	s	RES, CHIP 200 (1005)
R2222	1-208-911-81	s	RES, CHIP 10K (1005)
R2223	1-208-911-81	s	RES, CHIP 10K (1005)
R2224	1-208-911-81	s	RES, CHIP 10K (1005)
R2225	1-208-911-81	s	RES, CHIP 10K (1005)
R2226	1-208-867-81	s	RES, CHIP 150 (1005)
R2227	1-208-867-81	s	RES, CHIP 150 (1005)
R2228	1-220-876-81	s	RES, CHIP 18 (1005)
R2229	1-208-861-81	s	RES, CHIP 82 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2230	1-220-876-81	s	RES, CHIP 18 (1005)
R2231	1-208-861-81	s	RES, CHIP 82 (1005)
R2232	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2233	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2234	1-208-867-81	s	RES, CHIP 150 (1005)
R2235	1-208-867-81	s	RES, CHIP 150 (1005)
R2236	1-208-867-81	s	RES, CHIP 150 (1005)
R2237	1-208-867-81	s	RES, CHIP 150 (1005)
R2238	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2239	1-208-911-81	s	RES, CHIP 10K (1005)
R2240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2241	1-208-911-81	s	RES, CHIP 10K (1005)
R2242	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2243	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2244	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2245	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2246	1-218-903-91	s	RES, CHIP 220K (1608)
R2247	1-218-903-91	s	RES, CHIP 220K (1608)
R2248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2249	1-208-927-81	s	RES, CHIP 47K (1005)
R2250	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2251	1-208-927-81	s	RES, CHIP 47K (1005)
R2252	1-220-870-81	s	RES, CHIP 10 (1005)
R2253	1-220-870-81	s	RES, CHIP 10 (1005)
R2254	1-208-935-81	s	RES, CHIP 100K (1005)
R2255	1-208-935-81	s	RES, CHIP 100K (1005)
R2256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2258	1-208-855-81	s	RES, CHIP 47 (1005)
R2259	1-208-899-81	s	RES, CHIP 3.3K (1005)
R2260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2262	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2263	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2264	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2265	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2266	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2268	1-208-919-81	s	RES, CHIP 22K (1005)
R2269	1-208-919-81	s	RES, CHIP 22K (1005)
R2270	1-208-860-81	s	RES, CHIP 75 (1005)
R2271	1-208-860-81	s	RES, CHIP 75 (1005)
R2272	1-208-860-81	s	RES, CHIP 75 (1005)
R2273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2274	1-208-860-81	s	RES, CHIP 75 (1005)
R2275	1-208-863-81	s	RES, CHIP 100 (1005)
R2276	1-208-863-81	s	RES, CHIP 100 (1005)
R2277	1-208-910-81	s	RES, CHIP 9.1K (1005)
R2278	1-208-911-81	s	RES, CHIP 10K (1005)
R2282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2283	1-208-910-81	s	RES, CHIP 9.1K (1005)
R2284	1-208-911-81	s	RES, CHIP 10K (1005)
R2285	1-220-870-81	s	RES, CHIP 10 (1005)
R2289	1-220-870-81	s	RES, CHIP 10 (1005)
R2293	1-220-870-81	s	RES, CHIP 10 (1005)
R2294	1-220-870-81	s	RES, CHIP 10 (1005)
R2295	1-208-863-81	s	RES, CHIP 100 (1005)
R2297	1-208-863-81	s	RES, CHIP 100 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-208-855-81	s	RES, CHIP 47 (1005)
R2307	1-208-911-81	s	RES, CHIP 10K (1005)
R2308	1-208-911-81	s	RES, CHIP 10K (1005)
R2309	1-208-911-81	s	RES, CHIP 10K (1005)
R2310	1-208-911-81	s	RES, CHIP 10K (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-855-81	s	RES, CHIP 47 (1005)
R2313	1-208-855-81	s	RES, CHIP 47 (1005)
R2314	1-208-855-81	s	RES, CHIP 47 (1005)
R2315	1-208-855-81	s	RES, CHIP 47 (1005)
R2316	1-208-855-81	s	RES, CHIP 47 (1005)
R2317	1-208-855-81	s	RES, CHIP 47 (1005)
R2318	1-208-855-81	s	RES, CHIP 47 (1005)
R2319	1-208-855-81	s	RES, CHIP 47 (1005)
R2320	1-208-855-81	s	RES, CHIP 47 (1005)
R2321	1-208-855-81	s	RES, CHIP 47 (1005)
R2322	1-208-855-81	s	RES, CHIP 47 (1005)
R2323	1-208-855-81	s	RES, CHIP 47 (1005)
R2324	1-208-855-81	s	RES, CHIP 47 (1005)
R2325	1-208-855-81	s	RES, CHIP 47 (1005)
R2326	1-208-855-81	s	RES, CHIP 47 (1005)
R2327	1-208-911-81	s	RES, CHIP 10K (1005)
R2328	1-208-911-81	s	RES, CHIP 10K (1005)
R2329	1-208-911-81	s	RES, CHIP 10K (1005)
R2330	1-208-911-81	s	RES, CHIP 10K (1005)
R2331	1-208-911-81	s	RES, CHIP 10K (1005)
R2332	1-208-911-81	s	RES, CHIP 10K (1005)
R2334	1-208-855-81	s	RES, CHIP 47 (1005)
R2335	1-208-855-81	s	RES, CHIP 47 (1005)
R2336	1-208-855-81	s	RES, CHIP 47 (1005)
R2337	1-208-855-81	s	RES, CHIP 47 (1005)
R2339	1-208-855-81	s	RES, CHIP 47 (1005)
R2340	1-208-855-81	s	RES, CHIP 47 (1005)
R2341	1-208-855-81	s	RES, CHIP 47 (1005)
R2342	1-208-855-81	s	RES, CHIP 47 (1005)
R2343	1-208-855-81	s	RES, CHIP 47 (1005)
R2344	1-208-855-81	s	RES, CHIP 47 (1005)
R2345	1-208-855-81	s	RES, CHIP 47 (1005)
R2346	1-208-855-81	s	RES, CHIP 47 (1005)
R2347	1-208-855-81	s	RES, CHIP 47 (1005)
R2348	1-208-911-81	s	RES, CHIP 10K (1005)
R2349	1-208-855-81	s	RES, CHIP 47 (1005)
R2350	1-208-911-81	s	RES, CHIP 10K (1005)
R2351	1-208-855-81	s	RES, CHIP 47 (1005)
R2352	1-208-855-81	s	RES, CHIP 47 (1005)
R2353	1-208-855-81	s	RES, CHIP 47 (1005)
R2354	1-208-855-81	s	RES, CHIP 47 (1005)
R2355	1-208-855-81	s	RES, CHIP 47 (1005)
R2401	1-208-935-81	s	RES, CHIP 100K (1005)
R2403	1-208-935-81	s	RES, CHIP 100K (1005)
R2404	1-208-911-81	s	RES, CHIP 10K (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2408	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-208-911-81	s	RES, CHIP 10K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-855-81	s	RES, CHIP 47 (1005)
R2414	1-220-878-81	s	RES, CHIP 22 (1005)
R2415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2417	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2418	1-220-878-81	s	RES, CHIP 22 (1005)
R2419	1-220-878-81	s	RES, CHIP 22 (1005)
R2420	1-220-878-81	s	RES, CHIP 22 (1005)
R2421	1-220-878-81	s	RES, CHIP 22 (1005)
R2422	1-220-878-81	s	RES, CHIP 22 (1005)
R2423	1-220-878-81	s	RES, CHIP 22 (1005)
R2424	1-220-878-81	s	RES, CHIP 22 (1005)
R2425	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-208-911-81	s	RES, CHIP 10K (1005)
R2430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2437	1-208-911-81	s	RES, CHIP 10K (1005)
R2441	1-208-911-81	s	RES, CHIP 10K (1005)
R2444	1-208-911-81	s	RES, CHIP 10K (1005)
R2445	1-208-911-81	s	RES, CHIP 10K (1005)
R2446	1-208-855-81	s	RES, CHIP 47 (1005)
R2447	1-208-911-81	s	RES, CHIP 10K (1005)
R2448	1-208-911-81	s	RES, CHIP 10K (1005)
R2449	1-208-911-81	s	RES, CHIP 10K (1005)
R2450	1-208-911-81	s	RES, CHIP 10K (1005)
R2451	1-208-911-81	s	RES, CHIP 10K (1005)
R2452	1-208-911-81	s	RES, CHIP 10K (1005)
R2453	1-208-911-81	s	RES, CHIP 10K (1005)
R2454	1-208-911-81	s	RES, CHIP 10K (1005)
R2455	1-208-911-81	s	RES, CHIP 10K (1005)
R2456	1-208-911-81	s	RES, CHIP 10K (1005)
R2457	1-208-911-81	s	RES, CHIP 10K (1005)
R2458	1-208-911-81	s	RES, CHIP 10K (1005)
R2459	1-208-911-81	s	RES, CHIP 10K (1005)
R2460	1-208-855-81	s	RES, CHIP 47 (1005)
R2461	1-208-911-81	s	RES, CHIP 10K (1005)
R2462	1-208-911-81	s	RES, CHIP 10K (1005)
R2463	1-208-911-81	s	RES, CHIP 10K (1005)
R2464	1-208-911-81	s	RES, CHIP 10K (1005)
R2465	1-208-855-81	s	RES, CHIP 47 (1005)
R2466	1-208-855-81	s	RES, CHIP 47 (1005)
R2467	1-208-855-81	s	RES, CHIP 47 (1005)
R2468	1-208-855-81	s	RES, CHIP 47 (1005)
R2469	1-208-911-81	s	RES, CHIP 10K (1005)
R2470	1-208-911-81	s	RES, CHIP 10K (1005)
R2471	1-208-855-81	s	RES, CHIP 47 (1005)
R2472	1-208-855-81	s	RES, CHIP 47 (1005)
R2473	1-208-855-81	s	RES, CHIP 47 (1005)
R2474	1-208-855-81	s	RES, CHIP 47 (1005)
R2475	1-208-855-81	s	RES, CHIP 47 (1005)
R2476	1-208-855-81	s	RES, CHIP 47 (1005)
R2479	1-208-871-81	s	RES, CHIP 220 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2480	1-208-871-81	s	RES, CHIP 220 (1005)
R2481	1-208-871-81	s	RES, CHIP 220 (1005)
R2483	1-208-911-81	s	RES, CHIP 10K (1005)
R2484	1-208-875-81	s	RES, CHIP 330 (1005)
R2485	1-208-911-81	s	RES, CHIP 10K (1005)
R2486	1-208-855-81	s	RES, CHIP 47 (1005)
R2487	1-208-855-81	s	RES, CHIP 47 (1005)
R2500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2502	1-208-911-81	s	RES, CHIP 10K (1005)
R2503	1-208-911-81	s	RES, CHIP 10K (1005)
R2504	1-208-911-81	s	RES, CHIP 10K (1005)
R2505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2508	1-208-911-81	s	RES, CHIP 10K (1005)
R2509	1-208-911-81	s	RES, CHIP 10K (1005)
R2510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2512	1-208-911-81	s	RES, CHIP 10K (1005)
R2513	1-208-911-81	s	RES, CHIP 10K (1005)
R2514	1-208-911-81	s	RES, CHIP 10K (1005)
R2515	1-208-911-81	s	RES, CHIP 10K (1005)
R2516	1-208-911-81	s	RES, CHIP 10K (1005)
R2517	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2518	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2519	1-208-855-81	s	RES, CHIP 47 (1005)
R2520	1-208-855-81	s	RES, CHIP 47 (1005)
R2521	1-208-855-81	s	RES, CHIP 47 (1005)
R2522	1-208-855-81	s	RES, CHIP 47 (1005)
R2523	1-208-855-81	s	RES, CHIP 47 (1005)
R2524	1-208-855-81	s	RES, CHIP 47 (1005)
R2525	1-208-855-81	s	RES, CHIP 47 (1005)
R2526	1-208-855-81	s	RES, CHIP 47 (1005)
R2527	1-208-855-81	s	RES, CHIP 47 (1005)
R2528	1-208-867-81	s	RES, CHIP 150 (1005)
R2530	1-208-863-81	s	RES, CHIP 100 (1005)
R2534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2535	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2536	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2538	1-208-855-81	s	RES, CHIP 47 (1005)
R2539	1-208-855-81	s	RES, CHIP 47 (1005)
R2542	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2544	1-208-855-81	s	RES, CHIP 47 (1005)
R2545	1-208-855-81	s	RES, CHIP 47 (1005)
R2546	1-208-855-81	s	RES, CHIP 47 (1005)
R2547	1-208-855-81	s	RES, CHIP 47 (1005)
R2548	1-208-911-81	s	RES, CHIP 10K (1005)
R2549	1-208-911-81	s	RES, CHIP 10K (1005)
R2550	1-208-911-81	s	RES, CHIP 10K (1005)
R2551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2553	1-208-911-81	s	RES, CHIP 10K (1005)
R2554	1-208-911-81	s	RES, CHIP 10K (1005)
R2555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2556	1-208-911-81	s	RES, CHIP 10K (1005)
R2557	1-208-855-81	s	RES, CHIP 47 (1005)
R2558	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2567	1-208-855-81	s	RES, CHIP 47 (1005)
R2568	1-208-855-81	s	RES, CHIP 47 (1005)
R2569	1-208-863-81	s	RES, CHIP 100 (1005)
R2570	1-208-863-81	s	RES, CHIP 100 (1005)
R2571	1-208-863-81	s	RES, CHIP 100 (1005)
R2572	1-208-863-81	s	RES, CHIP 100 (1005)
R2645	1-208-911-81	s	RES, CHIP 10K (1005)
R2650	1-208-911-81	s	RES, CHIP 10K (1005)
R2651	1-208-911-81	s	RES, CHIP 10K (1005)
R2652	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2653	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2654	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2655	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2656	1-208-863-81	s	RES, CHIP 100 (1005)
R2657	1-208-863-81	s	RES, CHIP 100 (1005)
R2659	1-220-870-81	s	RES, CHIP 10 (1005)
R2660	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2663	1-208-911-81	s	RES, CHIP 10K (1005)
R2664	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2665	1-208-911-81	s	RES, CHIP 10K (1005)
R2666	1-208-881-81	s	RES, CHIP 560 (1005)
R2667	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2668	1-208-911-81	s	RES, CHIP 10K (1005)
R2669	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2670	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2673	1-208-911-81	s	RES, CHIP 10K (1005)
R2674	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2675	1-208-911-81	s	RES, CHIP 10K (1005)
R2676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2678	1-208-919-81	s	RES, CHIP 22K (1005)
R2679	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2680	1-208-894-81	s	RES, CHIP 2.0K (1005)
R2681	1-208-871-81	s	RES, CHIP 220 (1005)
R2682	1-208-863-81	s	RES, CHIP 100 (1005)
R2683	1-208-855-81	s	RES, CHIP 47 (1005)
R3000	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3002	1-208-863-81	s	RES, CHIP 100 (1005)
R3005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3006	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3008	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3010	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3012	1-208-911-81	s	RES, CHIP 10K (1005)
R3013	1-208-911-81	s	RES, CHIP 10K (1005)
R3014	1-208-911-81	s	RES, CHIP 10K (1005)
R3015	1-208-911-81	s	RES, CHIP 10K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R3017	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3019	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3020	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3021	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3022	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3023	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3024	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3026	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3028	1-220-870-81	s	RES, CHIP 10 (1005)
R3029	1-220-870-81	s	RES, CHIP 10 (1005)
R3030	1-220-870-81	s	RES, CHIP 10 (1005)
R3031	1-220-870-81	s	RES, CHIP 10 (1005)
R3032	1-208-855-81	s	RES, CHIP 47 (1005)
R3033	1-208-855-81	s	RES, CHIP 47 (1005)
R3034	1-208-855-81	s	RES, CHIP 47 (1005)
R3036	1-208-911-81	s	RES, CHIP 10K (1005)
R3037	1-208-855-81	s	RES, CHIP 47 (1005)
R3038	1-220-870-81	s	RES, CHIP 10 (1005)
R3039	1-220-870-81	s	RES, CHIP 10 (1005)
R3040	1-220-870-81	s	RES, CHIP 10 (1005)
R3041	1-220-870-81	s	RES, CHIP 10 (1005)
R3042	1-208-855-81	s	RES, CHIP 47 (1005)
R3043	1-208-855-81	s	RES, CHIP 47 (1005)
R3044	1-208-855-81	s	RES, CHIP 47 (1005)
R3045	1-208-861-81	s	RES, CHIP 82 (1005)
R3046	1-208-861-81	s	RES, CHIP 82 (1005)
R3047	1-208-884-81	s	RES, CHIP 750 (1005)
R3048	1-208-884-81	s	RES, CHIP 750 (1005)
R3049	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3050	1-208-890-81	s	RES, CHIP 1.3K (1005)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB101	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB104	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB106	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB502	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB503	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB504	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB505	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB506	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB507	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB508	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB509	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB510	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB511	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB512	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB513	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB514	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB515	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB516	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB901	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB902	1-234-702-21	s	RES, NETWORK 68 (1005X4)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
RB903	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB904	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB905	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB906	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB907	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB908	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB909	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB910	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB911	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB912	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1103	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2109	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2110	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2111	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2403	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2410	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2411	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2412	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2413	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
RB2416	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2417	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2419	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2420	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2422	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2423	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2425	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2426	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2427	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2428	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2429	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2500	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2501	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2507	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2508	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2509	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RV2200	1-225-805-21	s	RES, ADJ, CERMET 500
RV2201	1-225-805-21	s	RES, ADJ, CERMET 500
RV2202	1-225-805-21	s	RES, ADJ, CERMET 500
RV2203	1-225-805-21	s	RES, ADJ, CERMET 500
S501	1-692-270-41	s	SWITCH, SLIDE
S900	1-692-270-41	s	SWITCH, SLIDE
S1400	1-692-270-41	s	SWITCH, SLIDE
S1900	1-692-270-41	s	SWITCH, SLIDE
S2401	1-771-721-21	s	SWITCH, TACTILE
S2402	1-692-270-41	s	SWITCH, SLIDE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP504	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1900	1-535-877-22	s	CHIP, CHECKER
TP1901	1-535-877-22	s	CHIP, CHECKER
TP1902	1-535-877-22	s	CHIP, CHECKER
TP1903	1-535-877-22	s	CHIP, CHECKER
TP2100	1-535-877-22	s	CHIP, CHECKER
TP2101	1-535-877-22	s	CHIP, CHECKER
TP2200	1-535-877-22	s	CHIP, CHECKER
TP2201	1-535-877-22	s	CHIP, CHECKER
TP2300	1-535-877-22	s	CHIP, CHECKER
TP2301	1-535-877-22	s	CHIP, CHECKER

(HIF-46 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
TP2302	1-535-877-22	s	CHIP, CHECKER
TP2303	1-535-877-22	s	CHIP, CHECKER
TP2401	1-535-877-22	s	CHIP, CHECKER
TP2402	1-535-877-22	s	CHIP, CHECKER
TP2403	1-535-877-22	s	CHIP, CHECKER
TP2404	1-535-877-22	s	CHIP, CHECKER
X400	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X402	1-814-021-11	s	OSCILLATOR, CRYSTAL(74.250MHZ)
X403	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X404	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X405	1-813-003-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

HIF-46 BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-736-A	s	MOUNTED CIRCUIT BOARD, HIF-46
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C103	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C107	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C108	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C109	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C204	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C207	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C213	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C214	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C215	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C216	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C217	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C222	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C223	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C224	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C225	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C233	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C249	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C252	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C253	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C256	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C257	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C258	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C259	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C260	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C261	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C262	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C263	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C264	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C265	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C266	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C267	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C268	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C271	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C285	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C286	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C287	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C288	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C289	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C290	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C291	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C292	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C293	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C296	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C297	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C320	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C321	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C322	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C325	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C326	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C333	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C334	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C335	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C336	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C337	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C338	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C339	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C340	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C341	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C422	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C463	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C474	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C478	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C481	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C488	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C489	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C490	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C494	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C495	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C497	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C498	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C499	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C605	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C700	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C701	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C702	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C731	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C732	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C735	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C738	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C741	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C757	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C758	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C777	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C794	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C797	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1150	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1153	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1168	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1177	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1181	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1183	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1195	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1198	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1200	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1201	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1202	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1203	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1204	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1205	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1209	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1217	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1218	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1226	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1227	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1233	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1234	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1242	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1243	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1246	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1247	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1604	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1605	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1606	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1607	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1700	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1701	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1702	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1703	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1709	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1718	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1721	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1730	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1733	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1734	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1735	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1736	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1739	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1742	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1748	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1749	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1750	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1753	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1762	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1763	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1769	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1779	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1782	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1786	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1790	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1793	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1797	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1807	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1877	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1878	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1900	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1901	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1902	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1903	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1904	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1905	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1906	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1907	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1908	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1909	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2000	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2001	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2002	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2003	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2004	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2005	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2006	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2007	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2008	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2009	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2041	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2044	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2047	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2050	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2053	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2054	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2056	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2059	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2062	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2076	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2080	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2086	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2088	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2090	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2092	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2094	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2095	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2096	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2097	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2098	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2115	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2121	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2127	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2128	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2132	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2137	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2142	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2147	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2157	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2161	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2168	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2170	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2172	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2177	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2180	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2182	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2212	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2213	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2214	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2215	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2216	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2217	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2218	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2219	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2220	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2221	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2222	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2223	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2224	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2225	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2226	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2227	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2228	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2229	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2236	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2244	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2446	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2447	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2448	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2454	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2503	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C2504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2509	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2510	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2511	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2513	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2514	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2600	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2601	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2602	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2603	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2604	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2605	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2606	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2607	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2608	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2609	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2627	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2628	1-100-165-21	s	CAP, ELECT 47MF (8X7)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2632	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2633	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2675	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2676	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2677	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2678	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2679	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2680	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2681	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2682	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2683	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2684	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2685	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2686	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2687	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2688	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2689	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2690	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2691	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2692	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2693	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2694	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2695	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2696	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2699	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2800	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2802	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2803	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2806	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2807	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2808	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2809	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2810	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2811	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2812	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2813	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2814	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2815	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2816	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2817	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2818	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2819	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C2820	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2822	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2824	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2825	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2826	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2827	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2828	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2829	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2836	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2837	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2838	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2839	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2840	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2841	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2842	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2843	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2844	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2845	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2846	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2847	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2848	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2849	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2852	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C3100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3114	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3118	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3121	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
CN210	1-764-243-31	o	CONNECTOR (COAXIAL)
CN211	1-764-243-31	o	CONNECTOR (COAXIAL)
CN213	1-764-243-31	o	CONNECTOR (COAXIAL)
CN2401	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D501	8-719-077-09	s	DIODE CL-196HR-CD-T
D502	8-719-077-09	s	DIODE CL-196HR-CD-T
D503	8-719-063-83	s	DIODE CL-196YG-CD-T
D504	8-719-063-83	s	DIODE CL-196YG-CD-T
D900	8-719-063-83	s	DIODE CL-196YG-CD-T

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
D901	8-719-063-83	s	DIODE CL-196YG-CD-T
D902	8-719-077-09	s	DIODE CL-196HR-CD-T
D903	8-719-077-09	s	DIODE CL-196HR-CD-T
D1400	8-719-063-83	s	DIODE CL-196YG-CD-T
D1401	8-719-063-83	s	DIODE CL-196YG-CD-T
D1402	8-719-077-09	s	DIODE CL-196HR-CD-T
D1403	8-719-077-09	s	DIODE CL-196HR-CD-T
D1900	8-719-063-83	s	DIODE CL-196YG-CD-T
D1901	8-719-063-83	s	DIODE CL-196YG-CD-T
D1902	8-719-077-09	s	DIODE CL-196HR-CD-T
D1903	8-719-077-09	s	DIODE CL-196HR-CD-T
D2200	8-719-941-21	s	DIODE DAP202UT106
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
F2600	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2601	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2602	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F2603	⚠ 1-576-212-21	s	FUSE (SMD) (1.25A/125V)
F2604	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB709	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
FB711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1709	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1712	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1713	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2000	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2002	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2622	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2623	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2624	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2625	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2626	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FL2200	1-234-040-23	s	FILTER, LOW PASS
FL2201	1-234-040-23	s	FILTER, LOW PASS
IC100	8-759-573-97	s	IC SN74LVC541APWR
IC103	6-701-990-01	s	IC SN74LVC257APWR
IC104	8-759-694-36	s	IC SN74CBTLV3257PWR
IC105	6-700-804-01	s	IC SN74LVC574APWR
IC106	6-708-277-01	s	IC CDCVF25081PWR
IC107	8-759-573-97	s	IC SN74LVC541APWR
IC108	8-759-573-97	s	IC SN74LVC541APWR
IC109	6-708-277-01	s	IC CDCVF25081PWR
IC110	8-759-573-97	s	IC SN74LVC541APWR
IC111	6-700-804-01	s	IC SN74LVC574APWR
IC112	8-759-639-86	s	IC SN65LVDS32DR
IC113	8-759-639-86	s	IC SN65LVDS32DR
IC114	8-759-639-86	s	IC SN65LVDS32DR
IC115	8-759-573-97	s	IC SN74LVC541APWR
IC117	8-759-683-80	s	IC SN65LVDS1DBVR
IC200	6-702-620-01	s	IC GS1524-CKDE3
IC201	6-702-620-01	s	IC GS1524-CKDE3
IC202	6-702-621-01	s	IC GS1528-CKAE3
IC204	6-702-621-01	s	IC GS1528-CKAE3

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC206	6-702-621-01	s	IC GS1528-CKAE3
IC207	6-702-621-01	s	IC GS1528-CKAE3
IC208	6-702-621-01	s	IC GS1528-CKAE3
IC209	6-702-621-01	s	IC GS1528-CKAE3
IC210	6-702-621-01	s	IC GS1528-CKAE3
IC211	6-702-621-01	s	IC GS1528-CKAE3
IC213	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC214	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC215	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC216	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC217	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC218	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC219	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC220	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC221	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC222	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC401	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC402	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC404	6-707-895-01	s	IC MC100EPT22DTR2
IC406	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC407	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC408	6-706-682-01	s	IC MC100LVELT22DR2
IC409	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC410	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC411	6-708-277-01	s	IC CDCVF25081PWR
IC412	6-700-831-01	s	IC TC7WZ74FK(TE85R)
IC413	6-707-895-01	s	IC MC100EPT22DTR2
IC414	8-759-683-80	s	IC SN65LVDS1DBVR
IC501	6-707-621-01	o	IC S29AL016D70TFI020
IC502	8-759-683-80	s	IC SN65LVDS1DBVR
IC1200	6-700-764-01	s	IC DS90CR288AMTDX
IC1201	6-700-651-01	s	IC DS90CR483VJDX
IC1300	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1301	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1302	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1303	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1304	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1305	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1503	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1504	8-759-573-97	s	IC SN74LVC541APWR
IC1505	8-759-573-97	s	IC SN74LVC541APWR
IC2101	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC2102	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC2103	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC2200	6-701-079-01	s	IC ADV7300AKST
IC2201	6-701-079-01	s	IC ADV7300AKST
IC2202	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2203	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2204	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2205	8-759-381-54	s	IC UPC812G2-E2
IC2206	8-759-381-54	s	IC UPC812G2-E2
IC2207	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2208	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC2209	8-752-068-24	s	IC CXA1450M-TH
IC2210	8-759-255-83	s	IC LT1227CS8-E2
IC2211	8-759-255-83	s	IC LT1227CS8-E2

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC2212	6-700-804-01	s	IC SN74LVC574APWR
IC2213	6-700-804-01	s	IC SN74LVC574APWR
IC2214	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2215	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2216	8-759-683-80	s	IC SN65LVDS1DBVR
IC2217	8-759-564-49	s	IC TC7W53FU(TE12R)
IC2218	8-759-669-45	s	IC TL062CPWR-12
IC2219	8-759-669-45	s	IC TL062CPWR-12
IC2221	8-759-672-76	s	IC AK9813BF-E2
IC2401	8-759-679-55	s	IC SN74LVC08APWR
IC2402	8-759-573-97	s	IC SN74LVC541APWR
IC2403	8-759-573-97	s	IC SN74LVC541APWR
IC2404	8-759-573-97	s	IC SN74LVC541APWR
IC2405	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2406	8-759-392-77	s	IC SN74LVC245APWR
IC2407	8-759-392-77	s	IC SN74LVC245APWR
IC2408	6-708-277-01	s	IC CDCVF25081PWR
IC2409	8-759-573-97	s	IC SN74LVC541APWR
IC2410	8-759-392-77	s	IC SN74LVC245APWR
IC2411	8-759-392-77	s	IC SN74LVC245APWR
IC2412	8-759-573-97	s	IC SN74LVC541APWR
IC2413	8-759-573-97	s	IC SN74LVC541APWR
IC2414	8-759-573-97	s	IC SN74LVC541APWR
IC2415	6-701-990-01	s	IC SN74LVC257APWR
IC2417	8-759-549-20	s	IC SN74LV541APWR
IC2418	8-759-549-20	s	IC SN74LV541APWR
IC2419	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2420	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2421	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2423	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC2503	8-759-392-65	s	IC AD828ARZ-REEL
IC2505	8-759-833-99	s	IC TC74HC4052AFT(EL)
IC2506	6-701-990-01	s	IC SN74LVC257APWR
IC2507	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2508	8-759-573-97	s	IC SN74LVC541APWR
IC2509	8-759-392-77	s	IC SN74LVC245APWR
IC2510	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC2511	8-759-573-97	s	IC SN74LVC541APWR
IC2512	6-701-990-01	s	IC SN74LVC257APWR
IC2513	6-701-990-01	s	IC SN74LVC257APWR
IC2514	8-759-669-41	s	IC SN74LVC125APWR-12
IC2515	6-701-990-01	s	IC SN74LVC257APWR
IC2516	8-759-679-55	s	IC SN74LVC08APWR
IC2600	8-759-533-85	s	IC BA05FP-E2
IC2601	8-759-662-86	s	IC NJM79M05DL1A(TE2)
IC2602	6-701-572-01	s	IC TPS54610PWPR
IC2603	6-701-572-01	s	IC TPS54610PWPR
IC2604	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2605	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2606	6-700-655-01	s	IC LT1963ES8#TR
IC2607	6-700-655-01	s	IC LT1963ES8#TR
IC2608	6-705-562-01	s	IC UPC29M33AT-E1-AZ
IC2609	6-707-035-01	s	IC LP2996MRX
IC2610	6-707-035-01	s	IC LP2996MRX
IC2611	6-705-562-01	s	IC UPC29M33AT-E1-AZ
IC2612	6-705-562-01	s	IC UPC29M33AT-E1-AZ

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC2613	6-700-655-01	s	IC LT1963ES8#TR
IC2614	6-707-035-01	s	IC LP2996MRX
IC2615	6-700-399-01	s	IC UPC2925T-E1
L200	1-414-835-21	s	INDUCTOR, CHIP 3.9NH (1005)
L201	1-414-835-21	s	INDUCTOR, CHIP 3.9NH (1005)
L208	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L209	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L210	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L211	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L216	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L217	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L218	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L219	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L223	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L224	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L226	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L227	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L228	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L229	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L230	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L231	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L232	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L233	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L234	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L235	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L236	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L237	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L238	1-414-832-21	s	INDUCTOR, CHIP 2.2NH (1005)
L2100	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2200	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2201	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2202	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2203	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2204	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2205	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2206	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2500	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2600	1-419-491-21	s	COIL, CHOKE 10UH
L2601	1-419-491-21	s	COIL, CHOKE 10UH
L2602	1-419-491-21	s	COIL, CHOKE 10UH
L2604	1-419-491-21	s	COIL, CHOKE 10UH
L2609	1-419-630-21	s	COIL, CHOKE 4.7UH
L2610	1-419-630-21	s	COIL, CHOKE 4.7UH
L2620	1-419-630-21	s	COIL, CHOKE 4.7UH
L2621	1-419-630-21	s	COIL, CHOKE 4.7UH
L2622	1-419-630-21	s	COIL, CHOKE 4.7UH
L2623	1-419-630-21	s	COIL, CHOKE 4.7UH
L2624	1-419-630-21	s	COIL, CHOKE 4.7UH
L2625	1-419-630-21	s	COIL, CHOKE 4.7UH
L2627	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L2628	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q204	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q206	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q208	8-729-041-23	s	TRANSISTOR NDS356AP
Q210	8-729-041-23	s	TRANSISTOR NDS356AP
Q212	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q213	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
Q214	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q215	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q216	8-729-041-23	s	TRANSISTOR NDS356AP
Q217	8-729-041-23	s	TRANSISTOR NDS356AP
Q218	8-729-041-23	s	TRANSISTOR NDS356AP
Q219	8-729-041-23	s	TRANSISTOR NDS356AP
Q220	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q221	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q223	8-729-041-23	s	TRANSISTOR NDS356AP
Q224	8-729-041-23	s	TRANSISTOR NDS356AP
Q400	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q405	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2200	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q2201	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-208-855-81	s	RES, CHIP 47 (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-911-81	s	RES, CHIP 10K (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-911-81	s	RES, CHIP 10K (1005)
R109	1-208-911-81	s	RES, CHIP 10K (1005)
R110	1-208-855-81	s	RES, CHIP 47 (1005)
R111	1-208-855-81	s	RES, CHIP 47 (1005)
R112	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-208-855-81	s	RES, CHIP 47 (1005)
R114	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-208-855-81	s	RES, CHIP 47 (1005)
R116	1-208-635-11	s	RES, CHIP 10 (1005)
R117	1-208-635-11	s	RES, CHIP 10 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R118	1-208-855-81	s	RES, CHIP 47 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-208-855-81	s	RES, CHIP 47 (1005)
R122	1-208-855-81	s	RES, CHIP 47 (1005)
R123	1-208-855-81	s	RES, CHIP 47 (1005)
R124	1-208-643-11	s	RES, CHIP 22 (1005)
R125	1-208-683-11	s	RES, CHIP 1.0K (1005)
R127	1-208-683-11	s	RES, CHIP 1.0K (1005)
R128	1-208-643-11	s	RES, CHIP 22 (1005)
R129	1-208-643-11	s	RES, CHIP 22 (1005)
R130	1-208-643-11	s	RES, CHIP 22 (1005)
R131	1-208-643-11	s	RES, CHIP 22 (1005)
R132	1-208-643-11	s	RES, CHIP 22 (1005)
R133	1-208-643-11	s	RES, CHIP 22 (1005)
R134	1-208-643-11	s	RES, CHIP 22 (1005)
R135	1-208-643-11	s	RES, CHIP 22 (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-855-81	s	RES, CHIP 47 (1005)
R139	1-208-855-81	s	RES, CHIP 47 (1005)
R140	1-208-855-81	s	RES, CHIP 47 (1005)
R141	1-208-855-81	s	RES, CHIP 47 (1005)
R142	1-208-855-81	s	RES, CHIP 47 (1005)
R143	1-208-855-81	s	RES, CHIP 47 (1005)
R144	1-208-643-11	s	RES, CHIP 22 (1005)
R145	1-208-683-11	s	RES, CHIP 1.0K (1005)
R147	1-208-683-11	s	RES, CHIP 1.0K (1005)
R148	1-208-643-11	s	RES, CHIP 22 (1005)
R149	1-208-855-81	s	RES, CHIP 47 (1005)
R150	1-208-855-81	s	RES, CHIP 47 (1005)
R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-208-643-11	s	RES, CHIP 22 (1005)
R153	1-208-643-11	s	RES, CHIP 22 (1005)
R154	1-208-643-11	s	RES, CHIP 22 (1005)
R155	1-208-643-11	s	RES, CHIP 22 (1005)
R156	1-208-643-11	s	RES, CHIP 22 (1005)
R157	1-208-643-11	s	RES, CHIP 22 (1005)
R158	1-208-643-11	s	RES, CHIP 22 (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R162	1-208-855-81	s	RES, CHIP 47 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-855-81	s	RES, CHIP 47 (1005)
R165	1-208-855-81	s	RES, CHIP 47 (1005)
R166	1-208-855-81	s	RES, CHIP 47 (1005)
R167	1-208-855-81	s	RES, CHIP 47 (1005)
R168	1-208-855-81	s	RES, CHIP 47 (1005)
R169	1-208-855-81	s	RES, CHIP 47 (1005)
R170	1-208-855-81	s	RES, CHIP 47 (1005)
R171	1-208-855-81	s	RES, CHIP 47 (1005)
R172	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-208-855-81	s	RES, CHIP 47 (1005)
R174	1-208-855-81	s	RES, CHIP 47 (1005)
R175	1-208-855-81	s	RES, CHIP 47 (1005)
R176	1-208-855-81	s	RES, CHIP 47 (1005)
R177	1-208-855-81	s	RES, CHIP 47 (1005)
R178	1-208-855-81	s	RES, CHIP 47 (1005)
R179	1-208-855-81	s	RES, CHIP 47 (1005)
R180	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R181	1-208-855-81	s	RES, CHIP 47 (1005)
R182	1-208-855-81	s	RES, CHIP 47 (1005)
R183	1-208-855-81	s	RES, CHIP 47 (1005)
R184	1-208-635-11	s	RES, CHIP 10 (1005)
R185	1-208-635-11	s	RES, CHIP 10 (1005)
R186	1-208-635-11	s	RES, CHIP 10 (1005)
R187	1-208-635-11	s	RES, CHIP 10 (1005)
R188	1-208-635-11	s	RES, CHIP 10 (1005)
R189	1-208-635-11	s	RES, CHIP 10 (1005)
R190	1-208-635-11	s	RES, CHIP 10 (1005)
R191	1-208-635-11	s	RES, CHIP 10 (1005)
R192	1-208-635-11	s	RES, CHIP 10 (1005)
R193	1-208-635-11	s	RES, CHIP 10 (1005)
R194	1-208-635-11	s	RES, CHIP 10 (1005)
R195	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-873-81	s	RES, CHIP 270 (1005)
R207	1-208-873-81	s	RES, CHIP 270 (1005)
R208	1-218-939-11	s	RES, CHIP 68 (1005)
R209	1-218-939-11	s	RES, CHIP 68 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R214	1-218-941-11	s	RES, CHIP 100 (1005)
R218	1-218-941-11	s	RES, CHIP 100 (1005)
R222	1-208-671-11	s	RES, CHIP 330 (1005)
R223	1-208-671-11	s	RES, CHIP 330 (1005)
R224	1-208-671-11	s	RES, CHIP 330 (1005)
R225	1-208-671-11	s	RES, CHIP 330 (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-208-643-11	s	RES, CHIP 22 (1005)
R233	1-208-643-11	s	RES, CHIP 22 (1005)
R234	1-208-643-11	s	RES, CHIP 22 (1005)
R235	1-208-643-11	s	RES, CHIP 22 (1005)
R238	1-208-927-81	s	RES, CHIP 47K (1005)
R240	1-208-855-81	s	RES, CHIP 47 (1005)
R241	1-208-927-81	s	RES, CHIP 47K (1005)
R244	1-208-855-81	s	RES, CHIP 47 (1005)
R245	1-208-855-81	s	RES, CHIP 47 (1005)
R248	1-208-911-81	s	RES, CHIP 10K (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R251	1-208-911-81	s	RES, CHIP 10K (1005)
R254	1-208-881-81	s	RES, CHIP 560 (1005)
R256	1-208-881-81	s	RES, CHIP 560 (1005)
R258	1-208-860-81	s	RES, CHIP 75 (1005)
R260	1-208-860-81	s	RES, CHIP 75 (1005)
R261	1-208-860-81	s	RES, CHIP 75 (1005)
R264	1-208-860-81	s	RES, CHIP 75 (1005)
R266	1-208-671-11	s	RES, CHIP 330 (1005)
R267	1-208-671-11	s	RES, CHIP 330 (1005)
R270	1-208-671-11	s	RES, CHIP 330 (1005)
R271	1-208-671-11	s	RES, CHIP 330 (1005)
R274	1-208-873-81	s	RES, CHIP 270 (1005)
R276	1-208-873-81	s	RES, CHIP 270 (1005)
R278	1-208-873-81	s	RES, CHIP 270 (1005)
R280	1-208-873-81	s	RES, CHIP 270 (1005)
R282	1-208-643-11	s	RES, CHIP 22 (1005)
R283	1-208-643-11	s	RES, CHIP 22 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R284	1-208-643-11	s	RES, CHIP 22 (1005)
R285	1-208-643-11	s	RES, CHIP 22 (1005)
R286	1-208-643-11	s	RES, CHIP 22 (1005)
R287	1-208-643-11	s	RES, CHIP 22 (1005)
R288	1-208-643-11	s	RES, CHIP 22 (1005)
R289	1-208-643-11	s	RES, CHIP 22 (1005)
R290	1-208-927-81	s	RES, CHIP 47K (1005)
R291	1-208-927-81	s	RES, CHIP 47K (1005)
R292	1-208-855-81	s	RES, CHIP 47 (1005)
R293	1-208-927-81	s	RES, CHIP 47K (1005)
R294	1-208-927-81	s	RES, CHIP 47K (1005)
R295	1-208-855-81	s	RES, CHIP 47 (1005)
R296	1-208-855-81	s	RES, CHIP 47 (1005)
R297	1-208-855-81	s	RES, CHIP 47 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R299	1-208-855-81	s	RES, CHIP 47 (1005)
R300	1-208-911-81	s	RES, CHIP 10K (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R302	1-208-911-81	s	RES, CHIP 10K (1005)
R303	1-208-911-81	s	RES, CHIP 10K (1005)
R304	1-208-911-81	s	RES, CHIP 10K (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-881-81	s	RES, CHIP 560 (1005)
R307	1-208-881-81	s	RES, CHIP 560 (1005)
R308	1-208-881-81	s	RES, CHIP 560 (1005)
R309	1-208-881-81	s	RES, CHIP 560 (1005)
R310	1-208-860-81	s	RES, CHIP 75 (1005)
R311	1-208-860-81	s	RES, CHIP 75 (1005)
R312	1-208-860-81	s	RES, CHIP 75 (1005)
R313	1-208-860-81	s	RES, CHIP 75 (1005)
R314	1-208-860-81	s	RES, CHIP 75 (1005)
R315	1-208-860-81	s	RES, CHIP 75 (1005)
R316	1-208-860-81	s	RES, CHIP 75 (1005)
R317	1-208-860-81	s	RES, CHIP 75 (1005)
R318	1-218-948-11	s	RES, CHIP 390 (1005)
R320	1-218-948-11	s	RES, CHIP 390 (1005)
R322	1-218-948-11	s	RES, CHIP 390 (1005)
R324	1-218-948-11	s	RES, CHIP 390 (1005)
R325	1-218-948-11	s	RES, CHIP 390 (1005)
R326	1-208-873-81	s	RES, CHIP 270 (1005)
R327	1-208-873-81	s	RES, CHIP 270 (1005)
R328	1-208-873-81	s	RES, CHIP 270 (1005)
R329	1-208-873-81	s	RES, CHIP 270 (1005)
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-208-643-11	s	RES, CHIP 22 (1005)
R335	1-208-643-11	s	RES, CHIP 22 (1005)
R338	1-208-643-11	s	RES, CHIP 22 (1005)
R339	1-208-643-11	s	RES, CHIP 22 (1005)
R346	1-208-927-81	s	RES, CHIP 47K (1005)
R347	1-208-855-81	s	RES, CHIP 47 (1005)
R348	1-208-927-81	s	RES, CHIP 47K (1005)
R349	1-208-855-81	s	RES, CHIP 47 (1005)
R350	1-208-855-81	s	RES, CHIP 47 (1005)
R352	1-208-911-81	s	RES, CHIP 10K (1005)
R354	1-208-855-81	s	RES, CHIP 47 (1005)
R355	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R358	1-208-883-81	s	RES, CHIP 680 (1005)
R359	1-208-883-81	s	RES, CHIP 680 (1005)
R361	1-208-860-81	s	RES, CHIP 75 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-860-81	s	RES, CHIP 75 (1005)
R365	1-208-860-81	s	RES, CHIP 75 (1005)
R367	1-208-871-81	s	RES, CHIP 220 (1005)
R368	1-208-871-81	s	RES, CHIP 220 (1005)
R369	1-208-871-81	s	RES, CHIP 220 (1005)
R370	1-208-871-81	s	RES, CHIP 220 (1005)
R373	1-208-911-81	s	RES, CHIP 10K (1005)
R374	1-208-911-81	s	RES, CHIP 10K (1005)
R376	1-208-911-81	s	RES, CHIP 10K (1005)
R377	1-208-860-81	s	RES, CHIP 75 (1005)
R379	1-208-889-81	s	RES, CHIP 1.2K (1005)
R380	1-208-691-11	s	RES, CHIP 2.2K (1005)
R381	1-208-683-11	s	RES, CHIP 1.0K (1005)
R383	1-208-889-81	s	RES, CHIP 1.2K (1005)
R384	1-208-691-11	s	RES, CHIP 2.2K (1005)
R385	1-208-683-11	s	RES, CHIP 1.0K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-208-866-81	s	RES, CHIP 130 (1005)
R404	1-208-861-81	s	RES, CHIP 82 (1005)
R405	1-208-866-81	s	RES, CHIP 130 (1005)
R406	1-208-861-81	s	RES, CHIP 82 (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-699-11	s	RES, CHIP 4.7K (1005)
R409	1-208-869-81	s	RES, CHIP 180 (1005)
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-218-941-11	s	RES, CHIP 100 (1005)
R414	1-218-941-11	s	RES, CHIP 100 (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-208-643-11	s	RES, CHIP 22 (1005)
R418	1-208-643-11	s	RES, CHIP 22 (1005)
R420	1-208-643-11	s	RES, CHIP 22 (1005)
R423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	1-208-683-11	s	RES, CHIP 1.0K (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-866-81	s	RES, CHIP 130 (1005)
R433	1-208-861-81	s	RES, CHIP 82 (1005)
R434	1-208-866-81	s	RES, CHIP 130 (1005)
R435	1-208-861-81	s	RES, CHIP 82 (1005)
R436	1-208-911-81	s	RES, CHIP 10K (1005)
R437	1-208-699-11	s	RES, CHIP 4.7K (1005)
R438	1-208-869-81	s	RES, CHIP 180 (1005)
R439	1-208-911-81	s	RES, CHIP 10K (1005)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-208-643-11	s	RES, CHIP 22 (1005)
R443	1-208-683-11	s	RES, CHIP 1.0K (1005)
R446	1-208-643-11	s	RES, CHIP 22 (1005)
R447	1-208-683-11	s	RES, CHIP 1.0K (1005)
R448	1-208-683-11	s	RES, CHIP 1.0K (1005)
R449	1-208-683-11	s	RES, CHIP 1.0K (1005)
R450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-218-941-11	s	RES, CHIP 100 (1005)
R502	1-218-941-11	s	RES, CHIP 100 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R503	1-218-941-11	s	RES, CHIP 100 (1005)
R504	1-218-941-11	s	RES, CHIP 100 (1005)
R505	1-208-871-81	s	RES, CHIP 220 (1005)
R506	1-208-871-81	s	RES, CHIP 220 (1005)
R507	1-208-871-81	s	RES, CHIP 220 (1005)
R508	1-208-871-81	s	RES, CHIP 220 (1005)
R509	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-218-939-11	s	RES, CHIP 68 (1005)
R515	1-218-939-11	s	RES, CHIP 68 (1005)
R516	1-218-939-11	s	RES, CHIP 68 (1005)
R517	1-218-939-11	s	RES, CHIP 68 (1005)
R518	1-218-939-11	s	RES, CHIP 68 (1005)
R519	1-218-939-11	s	RES, CHIP 68 (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R600	1-218-941-11	s	RES, CHIP 100 (1005)
R601	1-208-867-81	s	RES, CHIP 150 (1005)
R602	1-208-861-81	s	RES, CHIP 82 (1005)
R604	1-208-867-81	s	RES, CHIP 150 (1005)
R605	1-208-861-81	s	RES, CHIP 82 (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-911-81	s	RES, CHIP 10K (1005)
R612	1-208-911-81	s	RES, CHIP 10K (1005)
R613	1-208-911-81	s	RES, CHIP 10K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)
R615	1-208-911-81	s	RES, CHIP 10K (1005)
R616	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R618	1-208-911-81	s	RES, CHIP 10K (1005)
R619	1-208-911-81	s	RES, CHIP 10K (1005)
R620	1-208-911-81	s	RES, CHIP 10K (1005)
R621	1-208-911-81	s	RES, CHIP 10K (1005)
R622	1-208-911-81	s	RES, CHIP 10K (1005)
R623	1-208-911-81	s	RES, CHIP 10K (1005)
R624	1-208-911-81	s	RES, CHIP 10K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-911-81	s	RES, CHIP 10K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-911-81	s	RES, CHIP 10K (1005)
R630	1-208-911-81	s	RES, CHIP 10K (1005)
R631	1-208-911-81	s	RES, CHIP 10K (1005)
R632	1-208-911-81	s	RES, CHIP 10K (1005)
R633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R635	1-208-894-81	s	RES, CHIP 2.0K (1005)
R636	1-208-894-81	s	RES, CHIP 2.0K (1005)
R637	1-208-894-81	s	RES, CHIP 2.0K (1005)
R638	1-208-894-81	s	RES, CHIP 2.0K (1005)
R639	1-208-911-81	s	RES, CHIP 10K (1005)
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-911-81	s	RES, CHIP 10K (1005)
R643	1-208-911-81	s	RES, CHIP 10K (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R645	1-208-911-81	s	RES, CHIP 10K (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-911-81	s	RES, CHIP 10K (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-208-911-81	s	RES, CHIP 10K (1005)
R652	1-208-911-81	s	RES, CHIP 10K (1005)
R653	1-208-911-81	s	RES, CHIP 10K (1005)
R654	1-208-911-81	s	RES, CHIP 10K (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R656	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-911-81	s	RES, CHIP 10K (1005)
R658	1-208-911-81	s	RES, CHIP 10K (1005)
R659	1-208-911-81	s	RES, CHIP 10K (1005)
R660	1-208-911-81	s	RES, CHIP 10K (1005)
R661	1-208-911-81	s	RES, CHIP 10K (1005)
R662	1-208-911-81	s	RES, CHIP 10K (1005)
R663	1-208-911-81	s	RES, CHIP 10K (1005)
R664	1-208-911-81	s	RES, CHIP 10K (1005)
R665	1-208-911-81	s	RES, CHIP 10K (1005)
R666	1-208-911-81	s	RES, CHIP 10K (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R669	1-208-883-81	s	RES, CHIP 680 (1005)
R670	1-208-861-81	s	RES, CHIP 82 (1005)
R671	1-208-861-81	s	RES, CHIP 82 (1005)
R672	1-208-911-81	s	RES, CHIP 10K (1005)
R674	1-218-939-11	s	RES, CHIP 68 (1005)
R676	1-218-939-11	s	RES, CHIP 68 (1005)
R677	1-218-939-11	s	RES, CHIP 68 (1005)
R678	1-218-939-11	s	RES, CHIP 68 (1005)
R679	1-208-683-11	s	RES, CHIP 1.0K (1005)
R680	1-208-683-11	s	RES, CHIP 1.0K (1005)
R681	1-208-683-11	s	RES, CHIP 1.0K (1005)
R682	1-208-683-11	s	RES, CHIP 1.0K (1005)
R683	1-208-855-81	s	RES, CHIP 47 (1005)
R684	1-208-855-81	s	RES, CHIP 47 (1005)
R685	1-208-683-11	s	RES, CHIP 1.0K (1005)
R686	1-208-683-11	s	RES, CHIP 1.0K (1005)
R687	1-208-683-11	s	RES, CHIP 1.0K (1005)
R688	1-208-683-11	s	RES, CHIP 1.0K (1005)
R690	1-208-683-11	s	RES, CHIP 1.0K (1005)
R691	1-208-683-11	s	RES, CHIP 1.0K (1005)
R692	1-208-683-11	s	RES, CHIP 1.0K (1005)
R693	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R694	1-218-939-11	s	RES, CHIP 68 (1005)
R695	1-208-855-81	s	RES, CHIP 47 (1005)
R696	1-208-855-81	s	RES, CHIP 47 (1005)
R697	1-208-683-11	s	RES, CHIP 1.0K (1005)
R698	1-208-683-11	s	RES, CHIP 1.0K (1005)
R699	1-208-683-11	s	RES, CHIP 1.0K (1005)
R700	1-208-683-11	s	RES, CHIP 1.0K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R708	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R709	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R714	1-208-683-11	s	RES, CHIP 1.0K (1005)
R715	1-208-683-11	s	RES, CHIP 1.0K (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R719	1-208-911-81	s	RES, CHIP 10K (1005)
R721	1-208-683-11	s	RES, CHIP 1.0K (1005)
R723	1-208-911-81	s	RES, CHIP 10K (1005)
R725	1-208-911-81	s	RES, CHIP 10K (1005)
R727	1-208-911-81	s	RES, CHIP 10K (1005)
R728	1-208-911-81	s	RES, CHIP 10K (1005)
R729	1-208-683-11	s	RES, CHIP 1.0K (1005)
R730	1-208-855-81	s	RES, CHIP 47 (1005)
R731	1-208-855-81	s	RES, CHIP 47 (1005)
R732	1-208-855-81	s	RES, CHIP 47 (1005)
R733	1-208-855-81	s	RES, CHIP 47 (1005)
R734	1-208-911-81	s	RES, CHIP 10K (1005)
R735	1-208-855-81	s	RES, CHIP 47 (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-911-81	s	RES, CHIP 10K (1005)
R738	1-208-911-81	s	RES, CHIP 10K (1005)
R739	1-208-911-81	s	RES, CHIP 10K (1005)
R740	1-208-911-81	s	RES, CHIP 10K (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R742	1-218-941-11	s	RES, CHIP 100 (1005)
R743	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R744	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R747	1-218-941-11	s	RES, CHIP 100 (1005)
R748	1-218-939-11	s	RES, CHIP 68 (1005)
R749	1-218-939-11	s	RES, CHIP 68 (1005)
R750	1-208-861-81	s	RES, CHIP 82 (1005)
R751	1-208-861-81	s	RES, CHIP 82 (1005)
R948	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R949	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R951	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R968	1-208-871-81	s	RES, CHIP 220 (1005)
R969	1-208-871-81	s	RES, CHIP 220 (1005)
R970	1-208-871-81	s	RES, CHIP 220 (1005)
R971	1-208-871-81	s	RES, CHIP 220 (1005)
R1027	1-208-643-11	s	RES, CHIP 22 (1005)
R1032	1-220-882-81	s	RES, CHIP 33 (1005)
R1033	1-220-882-81	s	RES, CHIP 33 (1005)
R1034	1-220-882-81	s	RES, CHIP 33 (1005)
R1035	1-220-882-81	s	RES, CHIP 33 (1005)
R1036	1-220-882-81	s	RES, CHIP 33 (1005)
R1037	1-220-882-81	s	RES, CHIP 33 (1005)
R1038	1-220-882-81	s	RES, CHIP 33 (1005)
R1039	1-220-882-81	s	RES, CHIP 33 (1005)
R1040	1-220-882-81	s	RES, CHIP 33 (1005)
R1041	1-220-882-81	s	RES, CHIP 33 (1005)
R1042	1-208-860-81	s	RES, CHIP 75 (1005)
R1043	1-208-860-81	s	RES, CHIP 75 (1005)
R1044	1-208-860-81	s	RES, CHIP 75 (1005)
R1045	1-208-860-81	s	RES, CHIP 75 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1046	1-208-860-81	s	RES, CHIP 75 (1005)
R1047	1-208-860-81	s	RES, CHIP 75 (1005)
R1056	1-220-882-81	s	RES, CHIP 33 (1005)
R1057	1-220-882-81	s	RES, CHIP 33 (1005)
R1058	1-208-911-81	s	RES, CHIP 10K (1005)
R1100	1-208-855-81	s	RES, CHIP 47 (1005)
R1101	1-208-855-81	s	RES, CHIP 47 (1005)
R1102	1-208-855-81	s	RES, CHIP 47 (1005)
R1103	1-208-855-81	s	RES, CHIP 47 (1005)
R1104	1-208-855-81	s	RES, CHIP 47 (1005)
R1105	1-208-855-81	s	RES, CHIP 47 (1005)
R1106	1-208-855-81	s	RES, CHIP 47 (1005)
R1107	1-208-855-81	s	RES, CHIP 47 (1005)
R1108	1-208-855-81	s	RES, CHIP 47 (1005)
R1109	1-208-855-81	s	RES, CHIP 47 (1005)
R1110	1-208-855-81	s	RES, CHIP 47 (1005)
R1111	1-208-855-81	s	RES, CHIP 47 (1005)
R1113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1114	1-208-635-11	s	RES, CHIP 10 (1005)
R1115	1-208-635-11	s	RES, CHIP 10 (1005)
R1116	1-208-635-11	s	RES, CHIP 10 (1005)
R1117	1-208-635-11	s	RES, CHIP 10 (1005)
R1118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1119	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1120	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1121	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1122	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1123	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1124	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1126	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1127	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1128	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1129	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1130	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1131	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1133	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1134	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1135	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1136	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1137	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1138	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1139	1-208-855-81	s	RES, CHIP 47 (1005)
R1140	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1141	1-208-855-81	s	RES, CHIP 47 (1005)
R1142	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1143	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1144	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1145	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1146	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1147	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1148	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1149	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1150	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1154	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1155	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1156	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1157	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1158	1-208-683-11	s	RES, CHIP 1.0K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1159	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1160	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1161	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1162	1-208-635-11	s	RES, CHIP 10 (1005)
R1163	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1174	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1175	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1176	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1177	1-208-911-81	s	RES, CHIP 10K (1005)
R1178	1-208-855-81	s	RES, CHIP 47 (1005)
R1179	1-208-855-81	s	RES, CHIP 47 (1005)
R1180	1-208-855-81	s	RES, CHIP 47 (1005)
R1181	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1182	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1183	1-208-855-81	s	RES, CHIP 47 (1005)
R1184	1-208-855-81	s	RES, CHIP 47 (1005)
R1185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1191	1-208-911-81	s	RES, CHIP 10K (1005)
R1192	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1194	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1195	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1196	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-208-855-81	s	RES, CHIP 47 (1005)
R1204	1-208-855-81	s	RES, CHIP 47 (1005)
R1205	1-208-855-81	s	RES, CHIP 47 (1005)
R1206	1-208-855-81	s	RES, CHIP 47 (1005)
R1207	1-208-855-81	s	RES, CHIP 47 (1005)
R1208	1-208-855-81	s	RES, CHIP 47 (1005)
R1209	1-208-855-81	s	RES, CHIP 47 (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)
R1212	1-208-635-11	s	RES, CHIP 10 (1005)
R1213	1-208-635-11	s	RES, CHIP 10 (1005)
R1216	1-208-911-81	s	RES, CHIP 10K (1005)
R1217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1219	1-208-911-81	s	RES, CHIP 10K (1005)
R1300	1-208-643-11	s	RES, CHIP 22 (1005)
R1301	1-208-643-11	s	RES, CHIP 22 (1005)
R1302	1-218-941-11	s	RES, CHIP 100 (1005)
R1303	1-208-855-81	s	RES, CHIP 47 (1005)
R1304	1-208-855-81	s	RES, CHIP 47 (1005)
R1305	1-208-935-81	s	RES, CHIP 100K (1005)
R1306	1-208-935-81	s	RES, CHIP 100K (1005)
R1307	1-208-935-81	s	RES, CHIP 100K (1005)
R1308	1-208-855-81	s	RES, CHIP 47 (1005)
R1309	1-208-855-81	s	RES, CHIP 47 (1005)
R1310	1-208-935-81	s	RES, CHIP 100K (1005)
R1311	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1312	1-208-855-81	s	RES, CHIP 47 (1005)
R1313	1-208-935-81	s	RES, CHIP 100K (1005)
R1314	1-208-643-11	s	RES, CHIP 22 (1005)
R1315	1-208-643-11	s	RES, CHIP 22 (1005)
R1316	1-218-941-11	s	RES, CHIP 100 (1005)
R1317	1-220-882-81	s	RES, CHIP 33 (1005)
R1318	1-220-882-81	s	RES, CHIP 33 (1005)
R1321	1-208-935-81	s	RES, CHIP 100K (1005)
R1322	1-220-882-81	s	RES, CHIP 33 (1005)
R1323	1-220-882-81	s	RES, CHIP 33 (1005)
R1324	1-208-935-81	s	RES, CHIP 100K (1005)
R1325	1-220-882-81	s	RES, CHIP 33 (1005)
R1326	1-220-882-81	s	RES, CHIP 33 (1005)
R1327	1-208-935-81	s	RES, CHIP 100K (1005)
R1328	1-208-643-11	s	RES, CHIP 22 (1005)
R1329	1-208-643-11	s	RES, CHIP 22 (1005)
R1330	1-208-643-11	s	RES, CHIP 22 (1005)
R1331	1-208-643-11	s	RES, CHIP 22 (1005)
R1332	1-218-941-11	s	RES, CHIP 100 (1005)
R1333	1-218-941-11	s	RES, CHIP 100 (1005)
R1334	1-208-643-11	s	RES, CHIP 22 (1005)
R1335	1-208-643-11	s	RES, CHIP 22 (1005)
R1336	1-208-643-11	s	RES, CHIP 22 (1005)
R1337	1-208-643-11	s	RES, CHIP 22 (1005)
R1338	1-218-941-11	s	RES, CHIP 100 (1005)
R1339	1-218-941-11	s	RES, CHIP 100 (1005)
R1448	1-218-941-11	s	RES, CHIP 100 (1005)
R1449	1-218-941-11	s	RES, CHIP 100 (1005)
R1450	1-218-941-11	s	RES, CHIP 100 (1005)
R1451	1-218-941-11	s	RES, CHIP 100 (1005)
R1452	1-208-871-81	s	RES, CHIP 220 (1005)
R1453	1-208-871-81	s	RES, CHIP 220 (1005)
R1454	1-208-871-81	s	RES, CHIP 220 (1005)
R1455	1-208-871-81	s	RES, CHIP 220 (1005)
R1456	1-208-911-81	s	RES, CHIP 10K (1005)
R1501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1504	1-208-911-81	s	RES, CHIP 10K (1005)
R1505	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1512	1-208-643-11	s	RES, CHIP 22 (1005)
R1513	1-208-643-11	s	RES, CHIP 22 (1005)
R1514	1-208-643-11	s	RES, CHIP 22 (1005)
R1515	1-208-643-11	s	RES, CHIP 22 (1005)
R1516	1-208-643-11	s	RES, CHIP 22 (1005)
R1517	1-208-867-81	s	RES, CHIP 150 (1005)
R1519	1-208-643-11	s	RES, CHIP 22 (1005)
R1520	1-208-643-11	s	RES, CHIP 22 (1005)
R1521	1-208-643-11	s	RES, CHIP 22 (1005)
R1522	1-208-643-11	s	RES, CHIP 22 (1005)
R1523	1-208-643-11	s	RES, CHIP 22 (1005)
R1524	1-208-867-81	s	RES, CHIP 150 (1005)
R1526	1-218-941-11	s	RES, CHIP 100 (1005)
R1527	1-218-941-11	s	RES, CHIP 100 (1005)
R1532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1533	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1600	1-208-671-11	s	RES, CHIP 330 (1005)
R1601	1-208-671-11	s	RES, CHIP 330 (1005)
R1602	1-208-671-11	s	RES, CHIP 330 (1005)
R1603	1-208-671-11	s	RES, CHIP 330 (1005)
R1604	1-208-671-11	s	RES, CHIP 330 (1005)
R1605	1-208-671-11	s	RES, CHIP 330 (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1619	1-208-911-81	s	RES, CHIP 10K (1005)
R1620	1-208-911-81	s	RES, CHIP 10K (1005)
R1621	1-208-911-81	s	RES, CHIP 10K (1005)
R1622	1-208-911-81	s	RES, CHIP 10K (1005)
R1623	1-208-911-81	s	RES, CHIP 10K (1005)
R1624	1-208-911-81	s	RES, CHIP 10K (1005)
R1625	1-208-911-81	s	RES, CHIP 10K (1005)
R1626	1-208-911-81	s	RES, CHIP 10K (1005)
R1627	1-208-911-81	s	RES, CHIP 10K (1005)
R1628	1-208-911-81	s	RES, CHIP 10K (1005)
R1629	1-208-911-81	s	RES, CHIP 10K (1005)
R1630	1-208-911-81	s	RES, CHIP 10K (1005)
R1631	1-208-911-81	s	RES, CHIP 10K (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-911-81	s	RES, CHIP 10K (1005)
R1634	1-208-911-81	s	RES, CHIP 10K (1005)
R1635	1-208-911-81	s	RES, CHIP 10K (1005)
R1636	1-208-911-81	s	RES, CHIP 10K (1005)
R1637	1-208-911-81	s	RES, CHIP 10K (1005)
R1638	1-208-911-81	s	RES, CHIP 10K (1005)
R1639	1-208-911-81	s	RES, CHIP 10K (1005)
R1640	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1641	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1642	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1643	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1644	1-208-911-81	s	RES, CHIP 10K (1005)
R1645	1-208-911-81	s	RES, CHIP 10K (1005)
R1646	1-208-911-81	s	RES, CHIP 10K (1005)
R1647	1-208-911-81	s	RES, CHIP 10K (1005)
R1648	1-208-911-81	s	RES, CHIP 10K (1005)
R1649	1-208-911-81	s	RES, CHIP 10K (1005)
R1650	1-208-911-81	s	RES, CHIP 10K (1005)
R1651	1-208-911-81	s	RES, CHIP 10K (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-208-911-81	s	RES, CHIP 10K (1005)
R1655	1-208-911-81	s	RES, CHIP 10K (1005)
R1656	1-208-911-81	s	RES, CHIP 10K (1005)
R1657	1-208-911-81	s	RES, CHIP 10K (1005)
R1658	1-208-861-81	s	RES, CHIP 82 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1659	1-218-939-11	s	RES, CHIP 68 (1005)
R1660	1-218-939-11	s	RES, CHIP 68 (1005)
R1661	1-208-861-81	s	RES, CHIP 82 (1005)
R1662	1-218-939-11	s	RES, CHIP 68 (1005)
R1663	1-218-939-11	s	RES, CHIP 68 (1005)
R1664	1-208-861-81	s	RES, CHIP 82 (1005)
R1665	1-218-939-11	s	RES, CHIP 68 (1005)
R1666	1-218-939-11	s	RES, CHIP 68 (1005)
R1667	1-208-861-81	s	RES, CHIP 82 (1005)
R1668	1-218-939-11	s	RES, CHIP 68 (1005)
R1669	1-218-939-11	s	RES, CHIP 68 (1005)
R1670	1-208-855-81	s	RES, CHIP 47 (1005)
R1671	1-208-855-81	s	RES, CHIP 47 (1005)
R1672	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1673	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1674	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1675	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1676	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1677	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1678	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1679	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1680	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1681	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1682	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1683	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1684	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1685	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1686	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1687	1-208-855-81	s	RES, CHIP 47 (1005)
R1688	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1689	1-208-855-81	s	RES, CHIP 47 (1005)
R1690	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1691	1-208-855-81	s	RES, CHIP 47 (1005)
R1692	1-208-855-81	s	RES, CHIP 47 (1005)
R1693	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1694	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1695	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1696	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1697	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1698	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1699	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1700	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1701	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1702	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1704	1-208-911-81	s	RES, CHIP 10K (1005)
R1706	1-208-911-81	s	RES, CHIP 10K (1005)
R1708	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1710	1-208-911-81	s	RES, CHIP 10K (1005)
R1712	1-208-911-81	s	RES, CHIP 10K (1005)
R1714	1-208-911-81	s	RES, CHIP 10K (1005)
R1715	1-208-911-81	s	RES, CHIP 10K (1005)
R1716	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1717	1-208-855-81	s	RES, CHIP 47 (1005)
R1718	1-208-855-81	s	RES, CHIP 47 (1005)
R1719	1-208-855-81	s	RES, CHIP 47 (1005)
R1720	1-208-855-81	s	RES, CHIP 47 (1005)
R1721	1-208-911-81	s	RES, CHIP 10K (1005)
R1722	1-208-911-81	s	RES, CHIP 10K (1005)
R1723	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1724	1-208-911-81	s	RES, CHIP 10K (1005)
R1725	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1726	1-208-911-81	s	RES, CHIP 10K (1005)
R1727	1-208-911-81	s	RES, CHIP 10K (1005)
R1728	1-208-911-81	s	RES, CHIP 10K (1005)
R1729	1-208-911-81	s	RES, CHIP 10K (1005)
R1730	1-208-911-81	s	RES, CHIP 10K (1005)
R1731	1-208-911-81	s	RES, CHIP 10K (1005)
R1736	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1737	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1744	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1745	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1900	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-855-81	s	RES, CHIP 47 (1005)
R1902	1-208-855-81	s	RES, CHIP 47 (1005)
R1903	1-208-855-81	s	RES, CHIP 47 (1005)
R1904	1-208-855-81	s	RES, CHIP 47 (1005)
R1905	1-208-855-81	s	RES, CHIP 47 (1005)
R1906	1-208-855-81	s	RES, CHIP 47 (1005)
R1907	1-208-855-81	s	RES, CHIP 47 (1005)
R1908	1-208-855-81	s	RES, CHIP 47 (1005)
R1909	1-208-855-81	s	RES, CHIP 47 (1005)
R1910	1-208-855-81	s	RES, CHIP 47 (1005)
R1911	1-208-855-81	s	RES, CHIP 47 (1005)
R1912	1-208-871-81	s	RES, CHIP 220 (1005)
R1913	1-208-871-81	s	RES, CHIP 220 (1005)
R1914	1-208-871-81	s	RES, CHIP 220 (1005)
R1915	1-208-871-81	s	RES, CHIP 220 (1005)
R1916	1-218-941-11	s	RES, CHIP 100 (1005)
R1917	1-218-941-11	s	RES, CHIP 100 (1005)
R1918	1-218-941-11	s	RES, CHIP 100 (1005)
R1919	1-218-941-11	s	RES, CHIP 100 (1005)
R1920	1-208-855-81	s	RES, CHIP 47 (1005)
R1921	1-208-855-81	s	RES, CHIP 47 (1005)
R1922	1-208-911-81	s	RES, CHIP 10K (1005)
R1923	1-208-911-81	s	RES, CHIP 10K (1005)
R1924	1-208-911-81	s	RES, CHIP 10K (1005)
R1925	1-208-911-81	s	RES, CHIP 10K (1005)
R1926	1-208-911-81	s	RES, CHIP 10K (1005)
R1927	1-208-911-81	s	RES, CHIP 10K (1005)
R1928	1-208-911-81	s	RES, CHIP 10K (1005)
R1929	1-208-911-81	s	RES, CHIP 10K (1005)
R1930	1-208-911-81	s	RES, CHIP 10K (1005)
R1931	1-208-911-81	s	RES, CHIP 10K (1005)
R1932	1-208-911-81	s	RES, CHIP 10K (1005)
R1933	1-208-911-81	s	RES, CHIP 10K (1005)
R1934	1-208-911-81	s	RES, CHIP 10K (1005)
R1935	1-208-911-81	s	RES, CHIP 10K (1005)
R1936	1-208-911-81	s	RES, CHIP 10K (1005)
R1937	1-208-911-81	s	RES, CHIP 10K (1005)
R1938	1-208-911-81	s	RES, CHIP 10K (1005)
R1939	1-208-911-81	s	RES, CHIP 10K (1005)
R1940	1-208-911-81	s	RES, CHIP 10K (1005)
R1941	1-208-911-81	s	RES, CHIP 10K (1005)
R1942	1-208-911-81	s	RES, CHIP 10K (1005)
R1943	1-208-911-81	s	RES, CHIP 10K (1005)
R1944	1-208-911-81	s	RES, CHIP 10K (1005)
R1945	1-208-911-81	s	RES, CHIP 10K (1005)
R1946	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1947	1-208-911-81	s	RES, CHIP 10K (1005)
R1948	1-208-911-81	s	RES, CHIP 10K (1005)
R1949	1-208-911-81	s	RES, CHIP 10K (1005)
R1950	1-208-911-81	s	RES, CHIP 10K (1005)
R1951	1-208-911-81	s	RES, CHIP 10K (1005)
R1952	1-208-911-81	s	RES, CHIP 10K (1005)
R1953	1-208-911-81	s	RES, CHIP 10K (1005)
R1954	1-208-911-81	s	RES, CHIP 10K (1005)
R1955	1-208-911-81	s	RES, CHIP 10K (1005)
R1956	1-208-911-81	s	RES, CHIP 10K (1005)
R1957	1-208-911-81	s	RES, CHIP 10K (1005)
R1958	1-208-911-81	s	RES, CHIP 10K (1005)
R1959	1-208-911-81	s	RES, CHIP 10K (1005)
R1960	1-208-911-81	s	RES, CHIP 10K (1005)
R1961	1-208-911-81	s	RES, CHIP 10K (1005)
R1962	1-208-911-81	s	RES, CHIP 10K (1005)
R1963	1-208-855-81	s	RES, CHIP 47 (1005)
R1964	1-208-855-81	s	RES, CHIP 47 (1005)
R1965	1-208-855-81	s	RES, CHIP 47 (1005)
R1966	1-208-855-81	s	RES, CHIP 47 (1005)
R1967	1-208-855-81	s	RES, CHIP 47 (1005)
R1968	1-208-855-81	s	RES, CHIP 47 (1005)
R1969	1-208-855-81	s	RES, CHIP 47 (1005)
R1970	1-208-855-81	s	RES, CHIP 47 (1005)
R2000	1-208-861-81	s	RES, CHIP 82 (1005)
R2001	1-208-861-81	s	RES, CHIP 82 (1005)
R2002	1-218-939-11	s	RES, CHIP 68 (1005)
R2003	1-218-939-11	s	RES, CHIP 68 (1005)
R2005	1-208-855-81	s	RES, CHIP 47 (1005)
R2006	1-218-939-11	s	RES, CHIP 68 (1005)
R2007	1-208-855-81	s	RES, CHIP 47 (1005)
R2008	1-218-939-11	s	RES, CHIP 68 (1005)
R2011	1-208-855-81	s	RES, CHIP 47 (1005)
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2016	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2017	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2018	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-208-635-11	s	RES, CHIP 10 (1005)
R2040	1-208-635-11	s	RES, CHIP 10 (1005)
R2041	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2042	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2043	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2044	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2045	1-208-635-11	s	RES, CHIP 10 (1005)
R2046	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2059	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2061	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2062	1-208-855-81	s	RES, CHIP 47 (1005)
R2063	1-208-855-81	s	RES, CHIP 47 (1005)
R2064	1-208-855-81	s	RES, CHIP 47 (1005)
R2065	1-208-911-81	s	RES, CHIP 10K (1005)
R2070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2076	1-208-911-81	s	RES, CHIP 10K (1005)
R2080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-208-643-11	s	RES, CHIP 22 (1005)
R2107	1-208-643-11	s	RES, CHIP 22 (1005)
R2108	1-208-643-11	s	RES, CHIP 22 (1005)
R2109	1-208-643-11	s	RES, CHIP 22 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-855-81	s	RES, CHIP 47 (1005)
R2114	1-218-941-11	s	RES, CHIP 100 (1005)
R2115	1-218-941-11	s	RES, CHIP 100 (1005)
R2116	1-218-941-11	s	RES, CHIP 100 (1005)
R2117	1-218-941-11	s	RES, CHIP 100 (1005)
R2118	1-218-941-11	s	RES, CHIP 100 (1005)
R2119	1-218-941-11	s	RES, CHIP 100 (1005)
R2120	1-218-941-11	s	RES, CHIP 100 (1005)
R2121	1-218-941-11	s	RES, CHIP 100 (1005)
R2122	1-218-941-11	s	RES, CHIP 100 (1005)
R2123	1-218-941-11	s	RES, CHIP 100 (1005)
R2124	1-218-941-11	s	RES, CHIP 100 (1005)
R2125	1-218-941-11	s	RES, CHIP 100 (1005)
R2126	1-218-941-11	s	RES, CHIP 100 (1005)
R2127	1-218-941-11	s	RES, CHIP 100 (1005)
R2128	1-218-941-11	s	RES, CHIP 100 (1005)
R2129	1-218-941-11	s	RES, CHIP 100 (1005)
R2130	1-218-941-11	s	RES, CHIP 100 (1005)
R2131	1-218-941-11	s	RES, CHIP 100 (1005)
R2132	1-218-941-11	s	RES, CHIP 100 (1005)
R2133	1-218-941-11	s	RES, CHIP 100 (1005)
R2134	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2139	1-208-911-81	s	RES, CHIP 10K (1005)
R2142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2145	1-208-911-81	s	RES, CHIP 10K (1005)
R2146	1-208-911-81	s	RES, CHIP 10K (1005)
R2147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2148	1-208-911-81	s	RES, CHIP 10K (1005)
R2149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2150	1-208-911-81	s	RES, CHIP 10K (1005)
R2152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2154	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2157	1-208-935-81	s	RES, CHIP 100K (1005)
R2158	1-208-935-81	s	RES, CHIP 100K (1005)
R2159	1-208-855-81	s	RES, CHIP 47 (1005)
R2160	1-208-855-81	s	RES, CHIP 47 (1005)
R2161	1-208-855-81	s	RES, CHIP 47 (1005)
R2162	1-208-855-81	s	RES, CHIP 47 (1005)
R2163	1-208-855-81	s	RES, CHIP 47 (1005)
R2200	1-208-935-81	s	RES, CHIP 100K (1005)
R2201	1-208-935-81	s	RES, CHIP 100K (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-927-81	s	RES, CHIP 47K (1005)
R2205	1-208-927-81	s	RES, CHIP 47K (1005)
R2206	1-218-941-11	s	RES, CHIP 100 (1005)
R2207	1-218-941-11	s	RES, CHIP 100 (1005)
R2208	1-208-935-81	s	RES, CHIP 100K (1005)
R2211	1-208-935-81	s	RES, CHIP 100K (1005)
R2214	1-208-881-81	s	RES, CHIP 560 (1005)
R2215	1-208-935-81	s	RES, CHIP 100K (1005)
R2216	1-208-881-81	s	RES, CHIP 560 (1005)
R2217	1-208-935-81	s	RES, CHIP 100K (1005)
R2220	1-208-871-81	s	RES, CHIP 220 (1005)
R2221	1-208-870-81	s	RES, CHIP 200 (1005)
R2222	1-208-911-81	s	RES, CHIP 10K (1005)
R2223	1-208-911-81	s	RES, CHIP 10K (1005)
R2224	1-208-911-81	s	RES, CHIP 10K (1005)
R2225	1-208-911-81	s	RES, CHIP 10K (1005)
R2226	1-208-867-81	s	RES, CHIP 150 (1005)
R2227	1-208-867-81	s	RES, CHIP 150 (1005)
R2228	1-220-876-81	s	RES, CHIP 18 (1005)
R2229	1-208-861-81	s	RES, CHIP 82 (1005)
R2230	1-220-876-81	s	RES, CHIP 18 (1005)
R2231	1-208-861-81	s	RES, CHIP 82 (1005)
R2232	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2233	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2234	1-208-867-81	s	RES, CHIP 150 (1005)
R2235	1-208-867-81	s	RES, CHIP 150 (1005)
R2236	1-208-867-81	s	RES, CHIP 150 (1005)
R2237	1-208-867-81	s	RES, CHIP 150 (1005)
R2238	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2239	1-208-911-81	s	RES, CHIP 10K (1005)
R2240	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2241	1-208-911-81	s	RES, CHIP 10K (1005)
R2242	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2243	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2244	1-208-691-11	s	RES, CHIP 2.2K (1005)
R2245	1-208-691-11	s	RES, CHIP 2.2K (1005)
R2246	1-218-903-91	s	RES, CHIP 220K (1608)
R2247	1-218-903-91	s	RES, CHIP 220K (1608)
R2248	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2249	1-208-927-81	s	RES, CHIP 47K (1005)
R2250	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2251	1-208-927-81	s	RES, CHIP 47K (1005)
R2252	1-208-635-11	s	RES, CHIP 10 (1005)
R2253	1-208-635-11	s	RES, CHIP 10 (1005)
R2254	1-208-935-81	s	RES, CHIP 100K (1005)
R2255	1-208-935-81	s	RES, CHIP 100K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2256	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2257	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2258	1-208-855-81	s	RES, CHIP 47 (1005)
R2259	1-208-695-11	s	RES, CHIP 3.3K (1005)
R2260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2262	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2263	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2264	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2265	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2266	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2268	1-208-715-11	s	RES, CHIP 22K (1005)
R2269	1-208-715-11	s	RES, CHIP 22K (1005)
R2270	1-208-860-81	s	RES, CHIP 75 (1005)
R2271	1-208-860-81	s	RES, CHIP 75 (1005)
R2272	1-208-860-81	s	RES, CHIP 75 (1005)
R2273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2274	1-208-860-81	s	RES, CHIP 75 (1005)
R2275	1-218-941-11	s	RES, CHIP 100 (1005)
R2276	1-218-941-11	s	RES, CHIP 100 (1005)
R2277	1-208-910-81	s	RES, CHIP 9.1K (1005)
R2278	1-208-911-81	s	RES, CHIP 10K (1005)
R2282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2283	1-208-910-81	s	RES, CHIP 9.1K (1005)
R2284	1-208-911-81	s	RES, CHIP 10K (1005)
R2285	1-208-635-11	s	RES, CHIP 10 (1005)
R2289	1-208-635-11	s	RES, CHIP 10 (1005)
R2293	1-208-635-11	s	RES, CHIP 10 (1005)
R2294	1-208-635-11	s	RES, CHIP 10 (1005)
R2295	1-218-941-11	s	RES, CHIP 100 (1005)
R2297	1-218-941-11	s	RES, CHIP 100 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-208-855-81	s	RES, CHIP 47 (1005)
R2307	1-208-911-81	s	RES, CHIP 10K (1005)
R2308	1-208-911-81	s	RES, CHIP 10K (1005)
R2309	1-208-911-81	s	RES, CHIP 10K (1005)
R2310	1-208-911-81	s	RES, CHIP 10K (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-855-81	s	RES, CHIP 47 (1005)
R2313	1-208-855-81	s	RES, CHIP 47 (1005)
R2314	1-208-855-81	s	RES, CHIP 47 (1005)
R2315	1-208-855-81	s	RES, CHIP 47 (1005)
R2316	1-208-855-81	s	RES, CHIP 47 (1005)
R2317	1-208-855-81	s	RES, CHIP 47 (1005)
R2318	1-208-855-81	s	RES, CHIP 47 (1005)
R2319	1-208-855-81	s	RES, CHIP 47 (1005)
R2320	1-208-855-81	s	RES, CHIP 47 (1005)
R2321	1-208-855-81	s	RES, CHIP 47 (1005)
R2322	1-208-855-81	s	RES, CHIP 47 (1005)
R2323	1-208-855-81	s	RES, CHIP 47 (1005)
R2324	1-208-855-81	s	RES, CHIP 47 (1005)
R2325	1-208-855-81	s	RES, CHIP 47 (1005)
R2326	1-208-855-81	s	RES, CHIP 47 (1005)
R2327	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2328	1-208-911-81	s	RES, CHIP 10K (1005)
R2329	1-208-911-81	s	RES, CHIP 10K (1005)
R2330	1-208-911-81	s	RES, CHIP 10K (1005)
R2331	1-208-911-81	s	RES, CHIP 10K (1005)
R2332	1-208-911-81	s	RES, CHIP 10K (1005)
R2334	1-208-855-81	s	RES, CHIP 47 (1005)
R2335	1-208-855-81	s	RES, CHIP 47 (1005)
R2336	1-208-855-81	s	RES, CHIP 47 (1005)
R2337	1-208-855-81	s	RES, CHIP 47 (1005)
R2339	1-208-855-81	s	RES, CHIP 47 (1005)
R2340	1-208-855-81	s	RES, CHIP 47 (1005)
R2341	1-208-855-81	s	RES, CHIP 47 (1005)
R2342	1-208-855-81	s	RES, CHIP 47 (1005)
R2343	1-208-855-81	s	RES, CHIP 47 (1005)
R2344	1-208-855-81	s	RES, CHIP 47 (1005)
R2345	1-208-855-81	s	RES, CHIP 47 (1005)
R2346	1-208-855-81	s	RES, CHIP 47 (1005)
R2347	1-208-855-81	s	RES, CHIP 47 (1005)
R2348	1-208-911-81	s	RES, CHIP 10K (1005)
R2349	1-208-855-81	s	RES, CHIP 47 (1005)
R2350	1-208-911-81	s	RES, CHIP 10K (1005)
R2351	1-208-855-81	s	RES, CHIP 47 (1005)
R2352	1-208-855-81	s	RES, CHIP 47 (1005)
R2353	1-208-855-81	s	RES, CHIP 47 (1005)
R2354	1-208-855-81	s	RES, CHIP 47 (1005)
R2355	1-208-855-81	s	RES, CHIP 47 (1005)
R2401	1-208-935-81	s	RES, CHIP 100K (1005)
R2403	1-208-935-81	s	RES, CHIP 100K (1005)
R2404	1-208-911-81	s	RES, CHIP 10K (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2408	1-208-855-81	s	RES, CHIP 47 (1005)
R2409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-208-911-81	s	RES, CHIP 10K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-855-81	s	RES, CHIP 47 (1005)
R2414	1-208-643-11	s	RES, CHIP 22 (1005)
R2415	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2417	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2418	1-208-643-11	s	RES, CHIP 22 (1005)
R2419	1-208-643-11	s	RES, CHIP 22 (1005)
R2420	1-208-643-11	s	RES, CHIP 22 (1005)
R2421	1-208-643-11	s	RES, CHIP 22 (1005)
R2422	1-208-643-11	s	RES, CHIP 22 (1005)
R2423	1-208-643-11	s	RES, CHIP 22 (1005)
R2424	1-208-643-11	s	RES, CHIP 22 (1005)
R2425	1-208-643-11	s	RES, CHIP 22 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-208-911-81	s	RES, CHIP 10K (1005)
R2429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2433	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2437	1-208-911-81	s	RES, CHIP 10K (1005)
R2441	1-208-911-81	s	RES, CHIP 10K (1005)
R2443	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2445	1-208-911-81	s	RES, CHIP 10K (1005)
R2446	1-208-855-81	s	RES, CHIP 47 (1005)
R2447	1-208-911-81	s	RES, CHIP 10K (1005)
R2448	1-208-911-81	s	RES, CHIP 10K (1005)
R2449	1-208-911-81	s	RES, CHIP 10K (1005)
R2450	1-208-911-81	s	RES, CHIP 10K (1005)
R2451	1-208-911-81	s	RES, CHIP 10K (1005)
R2452	1-208-911-81	s	RES, CHIP 10K (1005)
R2453	1-208-911-81	s	RES, CHIP 10K (1005)
R2454	1-208-911-81	s	RES, CHIP 10K (1005)
R2455	1-208-911-81	s	RES, CHIP 10K (1005)
R2456	1-208-911-81	s	RES, CHIP 10K (1005)
R2457	1-208-911-81	s	RES, CHIP 10K (1005)
R2458	1-208-911-81	s	RES, CHIP 10K (1005)
R2459	1-208-911-81	s	RES, CHIP 10K (1005)
R2460	1-208-855-81	s	RES, CHIP 47 (1005)
R2461	1-208-911-81	s	RES, CHIP 10K (1005)
R2462	1-208-911-81	s	RES, CHIP 10K (1005)
R2463	1-208-911-81	s	RES, CHIP 10K (1005)
R2464	1-208-911-81	s	RES, CHIP 10K (1005)
R2465	1-208-855-81	s	RES, CHIP 47 (1005)
R2466	1-208-855-81	s	RES, CHIP 47 (1005)
R2467	1-208-855-81	s	RES, CHIP 47 (1005)
R2468	1-208-855-81	s	RES, CHIP 47 (1005)
R2469	1-208-911-81	s	RES, CHIP 10K (1005)
R2470	1-208-911-81	s	RES, CHIP 10K (1005)
R2471	1-208-855-81	s	RES, CHIP 47 (1005)
R2472	1-208-855-81	s	RES, CHIP 47 (1005)
R2473	1-208-855-81	s	RES, CHIP 47 (1005)
R2474	1-208-855-81	s	RES, CHIP 47 (1005)
R2475	1-208-855-81	s	RES, CHIP 47 (1005)
R2476	1-208-855-81	s	RES, CHIP 47 (1005)
R2479	1-208-871-81	s	RES, CHIP 220 (1005)
R2480	1-208-871-81	s	RES, CHIP 220 (1005)
R2481	1-208-871-81	s	RES, CHIP 220 (1005)
R2483	1-208-911-81	s	RES, CHIP 10K (1005)
R2484	1-208-671-11	s	RES, CHIP 330 (1005)
R2485	1-208-911-81	s	RES, CHIP 10K (1005)
R2486	1-208-855-81	s	RES, CHIP 47 (1005)
R2487	1-208-855-81	s	RES, CHIP 47 (1005)
R2500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2502	1-208-911-81	s	RES, CHIP 10K (1005)
R2503	1-208-911-81	s	RES, CHIP 10K (1005)
R2504	1-208-911-81	s	RES, CHIP 10K (1005)
R2505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2508	1-208-911-81	s	RES, CHIP 10K (1005)
R2509	1-208-911-81	s	RES, CHIP 10K (1005)
R2510	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2511	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2512	1-208-911-81	s	RES, CHIP 10K (1005)
R2513	1-208-911-81	s	RES, CHIP 10K (1005)
R2514	1-208-911-81	s	RES, CHIP 10K (1005)
R2515	1-208-911-81	s	RES, CHIP 10K (1005)
R2516	1-208-911-81	s	RES, CHIP 10K (1005)
R2517	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2518	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2519	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2520	1-208-855-81	s	RES, CHIP 47 (1005)
R2521	1-208-855-81	s	RES, CHIP 47 (1005)
R2522	1-208-855-81	s	RES, CHIP 47 (1005)
R2523	1-208-855-81	s	RES, CHIP 47 (1005)
R2524	1-208-855-81	s	RES, CHIP 47 (1005)
R2525	1-208-855-81	s	RES, CHIP 47 (1005)
R2526	1-208-855-81	s	RES, CHIP 47 (1005)
R2527	1-208-855-81	s	RES, CHIP 47 (1005)
R2528	1-208-867-81	s	RES, CHIP 150 (1005)
R2530	1-218-941-11	s	RES, CHIP 100 (1005)
R2534	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2535	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2536	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2538	1-208-855-81	s	RES, CHIP 47 (1005)
R2539	1-208-855-81	s	RES, CHIP 47 (1005)
R2542	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2544	1-208-855-81	s	RES, CHIP 47 (1005)
R2545	1-208-855-81	s	RES, CHIP 47 (1005)
R2546	1-208-855-81	s	RES, CHIP 47 (1005)
R2547	1-208-855-81	s	RES, CHIP 47 (1005)
R2548	1-208-911-81	s	RES, CHIP 10K (1005)
R2549	1-208-911-81	s	RES, CHIP 10K (1005)
R2550	1-208-911-81	s	RES, CHIP 10K (1005)
R2551	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2553	1-208-911-81	s	RES, CHIP 10K (1005)
R2554	1-208-911-81	s	RES, CHIP 10K (1005)
R2555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2556	1-208-911-81	s	RES, CHIP 10K (1005)
R2557	1-208-855-81	s	RES, CHIP 47 (1005)
R2558	1-208-855-81	s	RES, CHIP 47 (1005)
R2559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2567	1-208-855-81	s	RES, CHIP 47 (1005)
R2568	1-208-855-81	s	RES, CHIP 47 (1005)
R2569	1-218-941-11	s	RES, CHIP 100 (1005)
R2570	1-218-941-11	s	RES, CHIP 100 (1005)
R2571	1-218-941-11	s	RES, CHIP 100 (1005)
R2572	1-218-941-11	s	RES, CHIP 100 (1005)
R2645	1-208-911-81	s	RES, CHIP 10K (1005)
R2650	1-208-911-81	s	RES, CHIP 10K (1005)
R2651	1-208-911-81	s	RES, CHIP 10K (1005)
R2652	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2653	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2654	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2655	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2656	1-218-941-11	s	RES, CHIP 100 (1005)
R2657	1-218-941-11	s	RES, CHIP 100 (1005)
R2659	1-208-635-11	s	RES, CHIP 10 (1005)
R2660	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2661	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2663	1-208-911-81	s	RES, CHIP 10K (1005)
R2664	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2665	1-208-911-81	s	RES, CHIP 10K (1005)
R2666	1-208-881-81	s	RES, CHIP 560 (1005)
R2667	1-208-691-11	s	RES, CHIP 2.2K (1005)
R2668	1-208-911-81	s	RES, CHIP 10K (1005)
R2669	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2670	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2673	1-208-911-81	s	RES, CHIP 10K (1005)
R2674	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2675	1-208-911-81	s	RES, CHIP 10K (1005)
R2676	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2677	1-208-683-11	s	RES, CHIP 1.0K (1005)
R2678	1-208-715-11	s	RES, CHIP 22K (1005)
R2679	1-208-699-11	s	RES, CHIP 4.7K (1005)
R2680	1-208-894-81	s	RES, CHIP 2.0K (1005)
R2681	1-208-871-81	s	RES, CHIP 220 (1005)
R2682	1-218-941-11	s	RES, CHIP 100 (1005)
R2683	1-208-855-81	s	RES, CHIP 47 (1005)
R3000	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3001	1-218-941-11	s	RES, CHIP 100 (1005)
R3002	1-218-941-11	s	RES, CHIP 100 (1005)
R3003	1-218-941-11	s	RES, CHIP 100 (1005)
R3004	1-218-941-11	s	RES, CHIP 100 (1005)
R3005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3006	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3008	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3009	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3010	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3011	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3012	1-208-911-81	s	RES, CHIP 10K (1005)
R3013	1-208-911-81	s	RES, CHIP 10K (1005)
R3014	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3015	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)
R3017	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-218-958-11	s	RES, CHIP 2.7K (1005)
R3019	1-218-958-11	s	RES, CHIP 2.7K (1005)
R3020	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3021	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3022	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3023	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3024	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3026	1-208-683-11	s	RES, CHIP 1.0K (1005)
R3028	1-208-635-11	s	RES, CHIP 10 (1005)
R3029	1-208-635-11	s	RES, CHIP 10 (1005)
R3030	1-208-635-11	s	RES, CHIP 10 (1005)
R3031	1-208-635-11	s	RES, CHIP 10 (1005)
R3032	1-208-855-81	s	RES, CHIP 47 (1005)
R3033	1-208-855-81	s	RES, CHIP 47 (1005)
R3034	1-208-855-81	s	RES, CHIP 47 (1005)
R3036	1-208-911-81	s	RES, CHIP 10K (1005)
R3037	1-208-855-81	s	RES, CHIP 47 (1005)
R3038	1-208-635-11	s	RES, CHIP 10 (1005)
R3039	1-208-635-11	s	RES, CHIP 10 (1005)
R3040	1-208-635-11	s	RES, CHIP 10 (1005)
R3041	1-208-635-11	s	RES, CHIP 10 (1005)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R3042	1-208-855-81	s	RES, CHIP 47 (1005)
R3043	1-208-855-81	s	RES, CHIP 47 (1005)
R3044	1-208-855-81	s	RES, CHIP 47 (1005)
R3045	1-208-861-81	s	RES, CHIP 82 (1005)
R3046	1-208-861-81	s	RES, CHIP 82 (1005)
R3047	1-208-884-81	s	RES, CHIP 750 (1005)
R3048	1-208-884-81	s	RES, CHIP 750 (1005)
R3049	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3050	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3313	1-218-941-11	s	RES, CHIP 100 (1005)
R3314	1-218-941-11	s	RES, CHIP 100 (1005)
R3315	1-218-941-11	s	RES, CHIP 100 (1005)
R3316	1-218-941-11	s	RES, CHIP 100 (1005)
R3317	1-218-941-11	s	RES, CHIP 100 (1005)
R3318	1-218-941-11	s	RES, CHIP 100 (1005)
R3319	1-218-941-11	s	RES, CHIP 100 (1005)
R3320	1-218-941-11	s	RES, CHIP 100 (1005)
R3321	1-208-855-81	s	RES, CHIP 47 (1005)
R3322	1-208-855-81	s	RES, CHIP 47 (1005)
R3323	1-218-948-11	s	RES, CHIP 390 (1005)
R3324	1-218-948-11	s	RES, CHIP 390 (1005)
R3325	1-208-855-81	s	RES, CHIP 47 (1005)
R3326	1-208-855-81	s	RES, CHIP 47 (1005)
R3327	1-218-948-11	s	RES, CHIP 390 (1005)
R3328	1-208-855-81	s	RES, CHIP 47 (1005)
R3329	1-208-855-81	s	RES, CHIP 47 (1005)
R3330	1-208-635-11	s	RES, CHIP 10 (1005)
R3331	1-208-635-11	s	RES, CHIP 10 (1005)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB101	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB104	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB106	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB502	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB503	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB504	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB505	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB506	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB507	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB508	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB509	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB510	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB511	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB512	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB513	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB514	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB515	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB516	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB901	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB902	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB903	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB904	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB905	1-234-702-21	s	RES, NETWORK 68 (1005X4)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB906	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB907	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB908	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB909	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB910	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB911	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB912	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1103	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2109	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2110	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2111	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2401	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2402	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2403	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2404	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2410	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2411	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2412	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2413	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2416	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2417	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2418	1-234-381-11	s	RES, NETWORK 100K (1005X4)

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB2419	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2420	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2422	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2423	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2424	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2425	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2426	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2427	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2428	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2429	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2500	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2501	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2507	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2508	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB2509	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RV2200	1-225-805-21	s	RES, ADJ, CERMET 500
RV2201	1-225-805-21	s	RES, ADJ, CERMET 500
RV2202	1-225-805-21	s	RES, ADJ, CERMET 500
RV2203	1-225-805-21	s	RES, ADJ, CERMET 500
S501	1-692-270-41	s	SWITCH, SLIDE
S900	1-692-270-41	s	SWITCH, SLIDE
S1400	1-692-270-41	s	SWITCH, SLIDE
S1900	1-692-270-41	s	SWITCH, SLIDE
S2401	1-771-721-21	s	SWITCH, TACTILE
S2402	1-692-270-41	s	SWITCH, SLIDE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP504	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1900	1-535-877-22	s	CHIP, CHECKER
TP1901	1-535-877-22	s	CHIP, CHECKER
TP1902	1-535-877-22	s	CHIP, CHECKER
TP1903	1-535-877-22	s	CHIP, CHECKER
TP2100	1-535-877-22	s	CHIP, CHECKER
TP2101	1-535-877-22	s	CHIP, CHECKER
TP2200	1-535-877-22	s	CHIP, CHECKER
TP2201	1-535-877-22	s	CHIP, CHECKER
TP2300	1-535-877-22	s	CHIP, CHECKER
TP2301	1-535-877-22	s	CHIP, CHECKER
TP2302	1-535-877-22	s	CHIP, CHECKER
TP2303	1-535-877-22	s	CHIP, CHECKER

(HIF-46 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
TP2401	1-535-877-22	s	CHIP, CHECKER
TP2402	1-535-877-22	s	CHIP, CHECKER
TP2403	1-535-877-22	s	CHIP, CHECKER
TP2404	1-535-877-22	s	CHIP, CHECKER
X400	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X402	1-814-021-11	s	OSCILLATOR, CRYSTAL(74.250MHZ)
X403	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X404	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X405	1-813-003-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

HIF-56 BOARD (SUFFIX 11)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1704-158-A	s	MOUNTED CIRCUIT BOARD, HIF-56
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
10pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C103	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C107	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C108	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C109	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C204	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C207	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C213	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C214	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C215	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C216	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C217	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C222	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C223	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C224	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C225	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C233	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C248	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C249	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C252	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C253	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C256	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C257	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C258	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C259	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C260	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C261	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C262	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C263	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C264	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C265	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C266	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C267	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C268	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C271	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C284	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C285	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C286	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C287	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C288	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C289	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C290	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C291	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C292	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C293	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C296	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C297	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C320	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C321	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C322	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C325	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C326	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C333	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C334	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C335	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C336	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C337	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C338	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C339	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C340	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C341	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C347	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C348	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C349	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C350	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C422	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C442	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C446	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C453	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C454	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C463	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C468	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C470	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C474	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C478	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C480	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C481	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C482	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C483	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C484	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C487	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C488	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C489	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C490	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C491	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C494	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C495	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C701	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C702	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C720	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C731	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C732	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C735	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C741	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C752	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C757	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C758	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C777	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C778	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C793	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C794	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C796	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C797	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C859	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C865	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1150	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1153	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1168	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1170	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1172	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1177	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1181	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1182	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1183	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1195	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1198	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1200	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1201	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1202	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1203	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1204	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1205	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1209	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1217	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1218	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1226	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1227	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1233	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1234	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1242	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1243	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1246	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1247	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1347	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1348	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1606	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1607	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1609	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1610	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1611	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1612	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1700	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1701	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1702	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1703	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1709	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1718	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1721	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1722	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1730	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1733	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1734	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1735	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1736	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1739	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1742	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1743	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1748	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1749	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1750	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1751	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1753	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1762	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1763	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1769	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1772	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1773	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1779	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1782	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C1783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1784	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1786	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1790	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1791	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1793	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1794	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1797	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1807	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1844	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1854	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1869	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1870	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1871	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1900	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1901	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1902	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1903	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1904	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1905	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1906	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1907	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1908	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1909	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2000	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2001	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2002	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2003	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2004	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2005	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2006	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2007	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2008	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2009	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2041	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2042	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2044	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2045	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2047	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2048	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2050	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2051	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2053	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2054	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2056	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2057	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2059	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2060	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2062	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2063	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2071	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2072	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2073	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2074	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2075	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2076	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2077	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2078	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2079	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2080	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2081	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2082	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2083	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2084	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2085	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2086	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2087	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2088	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2089	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2090	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2091	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2092	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2093	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2094	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2095	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2096	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2097	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2098	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2115	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2121	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2127	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2128	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2137	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2142	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2147	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2157	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2161	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2168	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2169	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2170	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2171	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2172	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2173	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2174	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2175	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2176	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2178	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2179	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2181	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2183	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2184	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2212	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2213	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2214	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2215	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2216	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2217	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2218	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2219	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2220	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2221	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2222	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2223	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2224	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2225	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2226	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2227	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2228	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2229	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2236	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2244	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2249	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2322	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2330	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2333	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2334	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2335	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2338	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2339	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2340	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2341	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2344	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2345	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2346	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2439	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2440	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2441	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2443	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2445	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2446	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2447	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2448	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2452	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2454	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2502	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2503	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2509	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2510	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2511	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2513	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2514	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2600	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2601	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2602	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2603	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2604	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2605	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2606	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2607	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2608	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2609	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2627	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2628	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2630	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2632	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2633	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2675	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2676	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2677	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2678	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2679	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2680	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2681	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2682	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2683	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2684	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2685	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2686	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2687	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2688	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2689	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2690	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2691	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2692	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2693	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2694	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2695	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2696	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2699	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2800	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2802	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2803	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2805	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2806	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2807	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2808	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2809	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2810	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2811	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2812	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2813	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C2814	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2815	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2816	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2817	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2818	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2819	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C2820	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2822	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2824	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2825	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2826	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2827	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2828	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2829	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C2830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2836	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2837	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2838	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2839	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2840	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2841	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2842	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2843	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2844	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2845	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2846	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C2847	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2848	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2852	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C2867	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C3100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3111	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3114	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3118	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3121	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3402	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
C3405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3412	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3413	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3414	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3415	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3416	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3428	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3435	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3436	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3437	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3438	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3472	1-164-942-81	s	CAP,CHIP CERAMIC 6800PF B 1005
C3473	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C3478	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3479	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
CN200	1-778-762-12	s	CONNECTOR, COAXIAL
CN201	1-778-762-12	s	CONNECTOR, COAXIAL
CN202	1-778-762-12	s	CONNECTOR, COAXIAL
CN203	1-778-762-12	s	CONNECTOR, COAXIAL
CN204	1-778-762-12	s	CONNECTOR, COAXIAL
CN205	1-778-762-12	s	CONNECTOR, COAXIAL
CN206	1-778-762-12	s	CONNECTOR, COAXIAL
CN207	1-778-762-12	s	CONNECTOR, COAXIAL
CN208	1-778-762-12	s	CONNECTOR, COAXIAL
CN209	1-778-762-12	s	CONNECTOR, COAXIAL
CN210	1-764-243-31	o	CONNECTOR (COAXIAL)
CN211	1-764-243-31	o	CONNECTOR (COAXIAL)
CN213	1-764-243-31	o	CONNECTOR (COAXIAL)
CN2401	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D501	8-719-077-09	s	DIODE CL-196HR-CD-T
D502	8-719-077-09	s	DIODE CL-196HR-CD-T
D503	8-719-074-31	s	DIODE CL-196YG-CD-T
D504	8-719-074-31	s	DIODE CL-196YG-CD-T
D900	8-719-074-31	s	DIODE CL-196YG-CD-T
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-077-09	s	DIODE CL-196HR-CD-T
D903	8-719-077-09	s	DIODE CL-196HR-CD-T
D1400	8-719-074-31	s	DIODE CL-196YG-CD-T
D1401	8-719-074-31	s	DIODE CL-196YG-CD-T

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
D1402	8-719-077-09	s	DIODE CL-196HR-CD-T
D1403	8-719-077-09	s	DIODE CL-196HR-CD-T
D1900	8-719-074-31	s	DIODE CL-196YG-CD-T
D1901	8-719-074-31	s	DIODE CL-196YG-CD-T
D1902	8-719-077-09	s	DIODE CL-196HR-CD-T
D1903	8-719-077-09	s	DIODE CL-196HR-CD-T
D2200	8-719-941-21	s	DIODE DAP202UT106
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
F2600	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2601	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2602	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F2603	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F2604	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB206	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB208	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB209	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB210	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB211	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB212	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB213	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB214	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB215	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
FB410	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB709	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2000	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2002	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2622	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2623	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2624	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2625	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2626	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FL2200	1-234-040-23	s	FILTER, LOW PASS
FL2201	1-234-040-23	s	FILTER, LOW PASS
IC100	8-759-573-97	s	IC SN74LVC541APWR
IC101	6-702-547-11	s	IC SN65LVDS2DR
IC102	6-702-547-11	s	IC SN65LVDS2DR
IC103	6-701-990-01	s	IC SN74LVC257APWR
IC104	8-759-694-36	s	IC SN74CBTLV3257PWR
IC105	6-700-804-01	s	IC SN74LVC574APWR
IC106	6-708-277-01	s	IC CDCVF25081PWR
IC107	8-759-573-97	s	IC SN74LVC541APWR
IC108	8-759-573-97	s	IC SN74LVC541APWR
IC109	6-708-277-01	s	IC CDCVF25081PWR

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC110	8-759-573-97	s	IC SN74LVC541APWR
IC111	6-700-804-01	s	IC SN74LVC574APWR
IC112	8-759-639-86	s	IC SN65LVDS32DR
IC113	8-759-639-86	s	IC SN65LVDS32DR
IC114	8-759-639-86	s	IC SN65LVDS32DR
IC115	8-759-573-97	s	IC SN74LVC541APWR
IC116	6-702-547-11	s	IC SN65LVDS2DR
IC117	8-759-683-80	s	IC SN65LVDS1DBVR
IC213	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC214	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC215	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC216	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC217	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC218	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC219	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC220	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC221	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC222	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC401	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC402	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC404	6-707-895-01	s	IC MC100EPT22DTR2
IC406	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC407	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC408	6-706-682-01	s	IC MC100LVELT22DR2
IC410	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC411	8-759-683-80	s	IC SN65LVDS1DBVR
IC412	6-714-109-01	s	IC LMK03000CISQ
IC414	8-759-683-80	s	IC SN65LVDS1DBVR
IC1200	6-700-764-01	s	IC DS90CR288AMTDX
IC1201	6-700-651-01	s	IC DS90CR483VJDX
IC1300	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1301	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1302	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1303	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1304	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1305	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1503	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1504	8-759-573-97	s	IC SN74LVC541APWR
IC1505	8-759-573-97	s	IC SN74LVC541APWR
IC2101	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC2103	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC2105	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC2200	6-701-079-01	s	IC ADV7300AKST
IC2201	6-701-079-01	s	IC ADV7300AKST
IC2202	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2203	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2204	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2205	8-759-381-54	s	IC UPC812G2-E2
IC2206	8-759-381-54	s	IC UPC812G2-E2
IC2207	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2208	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC2209	8-752-068-24	s	IC CXA1450M-TH
IC2210	8-759-255-83	s	IC LT1227CS8-E2
IC2211	8-759-255-83	s	IC LT1227CS8-E2
IC2212	6-700-804-01	s	IC SN74LVC574APWR
IC2213	6-700-804-01	s	IC SN74LVC574APWR

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC2214	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2215	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2216	8-759-683-80	s	IC SN65LVDS1DBVR
IC2217	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2218	8-759-669-45	s	IC TL062CPWR-12
IC2219	8-759-669-45	s	IC TL062CPWR-12
IC2221	8-759-672-76	s	IC AK9813BF-E2
IC2401	8-759-679-55	s	IC SN74LVC08APWR
IC2402	8-759-573-97	s	IC SN74LVC541APWR
IC2403	8-759-573-97	s	IC SN74LVC541APWR
IC2404	8-759-573-97	s	IC SN74LVC541APWR
IC2405	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2406	8-759-392-77	s	IC SN74LVC245APWR
IC2407	8-759-392-77	s	IC SN74LVC245APWR
IC2408	6-708-277-01	s	IC CDCVF25081PWR
IC2409	8-759-573-97	s	IC SN74LVC541APWR
IC2410	8-759-392-77	s	IC SN74LVC245APWR
IC2411	8-759-392-77	s	IC SN74LVC245APWR
IC2412	8-759-573-97	s	IC SN74LVC541APWR
IC2413	8-759-573-97	s	IC SN74LVC541APWR
IC2414	8-759-573-97	s	IC SN74LVC541APWR
IC2415	6-701-990-01	s	IC SN74LVC257APWR
IC2417	8-759-549-20	s	IC SN74LV541APWR
IC2418	8-759-549-20	s	IC SN74LV541APWR
IC2419	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2420	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2421	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2423	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC2503	8-759-392-65	s	IC AD828ARZ-REEL
IC2505	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC2506	6-701-990-01	s	IC SN74LVC257APWR
IC2507	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2508	8-759-573-97	s	IC SN74LVC541APWR
IC2509	8-759-392-77	s	IC SN74LVC245APWR
IC2510	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC2511	8-759-573-97	s	IC SN74LVC541APWR
IC2512	6-701-990-01	s	IC SN74LVC257APWR
IC2513	6-701-990-01	s	IC SN74LVC257APWR
IC2514	8-759-669-41	s	IC SN74LVC125APWR-12
IC2515	6-701-990-01	s	IC SN74LVC257APWR
IC2516	8-759-679-55	s	IC SN74LVC08APWR
IC2600	8-759-460-74	s	IC BA05FP-E2
IC2601	8-759-662-86	s	IC NJM79M05DL1A(TE2)
IC2602	6-701-572-01	s	IC TPS54610PWPR
IC2603	6-701-572-01	s	IC TPS54610PWPR
IC2604	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2605	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2606	6-700-655-01	s	IC LT1963ES8#TR
IC2607	6-700-655-01	s	IC LT1963ES8#TR
IC2608	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2609	6-707-035-01	s	IC LP2996MRX
IC2610	6-707-035-01	s	IC LP2996MRX
IC2611	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2612	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2613	6-700-655-01	s	IC LT1963ES8#TR
IC2614	6-707-035-01	s	IC LP2996MRX

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC2615	6-709-013-01	s	IC UPC2925BT-E2-AZ
L200	1-414-834-21	s	INDUCTOR, CHIP 3.3NH (1005)
L201	1-414-834-21	s	INDUCTOR, CHIP 3.3NH (1005)
L208	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L209	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L210	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L211	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L216	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L217	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L218	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L219	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L223	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L224	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L226	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L227	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L228	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L229	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L237	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L240	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L2100	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2200	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2201	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2202	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2203	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2204	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2205	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2206	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2500	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2600	1-419-491-21	s	COIL, CHOKE 10UH
L2601	1-419-491-21	s	COIL, CHOKE 10UH
L2602	1-419-491-21	s	COIL, CHOKE 10UH
L2604	1-419-491-21	s	COIL, CHOKE 10UH
L2609	1-419-630-21	s	COIL, CHOKE 4.7UH
L2610	1-419-630-21	s	COIL, CHOKE 4.7UH
L2620	1-419-630-21	s	COIL, CHOKE 4.7UH
L2621	1-419-630-21	s	COIL, CHOKE 4.7UH
L2622	1-419-630-21	s	COIL, CHOKE 4.7UH
L2623	1-419-630-21	s	COIL, CHOKE 4.7UH
L2624	1-419-630-21	s	COIL, CHOKE 4.7UH
L2625	1-419-630-21	s	COIL, CHOKE 4.7UH
L2627	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L2628	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q400	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q405	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2200	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q2201	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-208-855-81	s	RES, CHIP 47 (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-911-81	s	RES, CHIP 10K (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-911-81	s	RES, CHIP 10K (1005)
R109	1-208-911-81	s	RES, CHIP 10K (1005)
R110	1-208-855-81	s	RES, CHIP 47 (1005)
R111	1-208-855-81	s	RES, CHIP 47 (1005)
R112	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-208-855-81	s	RES, CHIP 47 (1005)
R114	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-208-855-81	s	RES, CHIP 47 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-208-855-81	s	RES, CHIP 47 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-208-855-81	s	RES, CHIP 47 (1005)
R122	1-208-855-81	s	RES, CHIP 47 (1005)
R123	1-208-855-81	s	RES, CHIP 47 (1005)
R124	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R128	1-220-878-81	s	RES, CHIP 22 (1005)
R129	1-220-878-81	s	RES, CHIP 22 (1005)
R130	1-220-878-81	s	RES, CHIP 22 (1005)
R131	1-220-878-81	s	RES, CHIP 22 (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R134	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-220-878-81	s	RES, CHIP 22 (1005)
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-855-81	s	RES, CHIP 47 (1005)
R139	1-208-855-81	s	RES, CHIP 47 (1005)
R140	1-208-855-81	s	RES, CHIP 47 (1005)
R141	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R142	1-208-855-81	s	RES, CHIP 47 (1005)
R143	1-208-855-81	s	RES, CHIP 47 (1005)
R144	1-220-878-81	s	RES, CHIP 22 (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-208-855-81	s	RES, CHIP 47 (1005)
R150	1-208-855-81	s	RES, CHIP 47 (1005)
R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R162	1-208-855-81	s	RES, CHIP 47 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-855-81	s	RES, CHIP 47 (1005)
R165	1-208-855-81	s	RES, CHIP 47 (1005)
R166	1-208-855-81	s	RES, CHIP 47 (1005)
R167	1-208-855-81	s	RES, CHIP 47 (1005)
R168	1-208-855-81	s	RES, CHIP 47 (1005)
R169	1-208-855-81	s	RES, CHIP 47 (1005)
R170	1-208-855-81	s	RES, CHIP 47 (1005)
R171	1-208-855-81	s	RES, CHIP 47 (1005)
R172	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-208-855-81	s	RES, CHIP 47 (1005)
R174	1-208-855-81	s	RES, CHIP 47 (1005)
R175	1-208-855-81	s	RES, CHIP 47 (1005)
R176	1-208-855-81	s	RES, CHIP 47 (1005)
R177	1-208-855-81	s	RES, CHIP 47 (1005)
R178	1-208-855-81	s	RES, CHIP 47 (1005)
R179	1-208-855-81	s	RES, CHIP 47 (1005)
R180	1-208-855-81	s	RES, CHIP 47 (1005)
R181	1-208-855-81	s	RES, CHIP 47 (1005)
R182	1-208-855-81	s	RES, CHIP 47 (1005)
R183	1-208-855-81	s	RES, CHIP 47 (1005)
R184	1-220-870-81	s	RES, CHIP 10 (1005)
R185	1-220-870-81	s	RES, CHIP 10 (1005)
R186	1-220-870-81	s	RES, CHIP 10 (1005)
R187	1-220-870-81	s	RES, CHIP 10 (1005)
R188	1-220-870-81	s	RES, CHIP 10 (1005)
R189	1-220-870-81	s	RES, CHIP 10 (1005)
R190	1-220-870-81	s	RES, CHIP 10 (1005)
R191	1-220-870-81	s	RES, CHIP 10 (1005)
R192	1-220-870-81	s	RES, CHIP 10 (1005)
R193	1-220-870-81	s	RES, CHIP 10 (1005)
R194	1-220-870-81	s	RES, CHIP 10 (1005)
R195	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-208-860-81	s	RES, CHIP 75 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R222	1-208-875-81	s	RES, CHIP 330 (1005)
R223	1-208-875-81	s	RES, CHIP 330 (1005)
R224	1-208-875-81	s	RES, CHIP 330 (1005)
R225	1-208-875-81	s	RES, CHIP 330 (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-208-855-81	s	RES, CHIP 47 (1005)
R244	1-208-855-81	s	RES, CHIP 47 (1005)
R245	1-208-855-81	s	RES, CHIP 47 (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R254	1-208-881-81	s	RES, CHIP 560 (1005)
R256	1-208-881-81	s	RES, CHIP 560 (1005)
R258	1-208-860-81	s	RES, CHIP 75 (1005)
R260	1-208-860-81	s	RES, CHIP 75 (1005)
R261	1-208-860-81	s	RES, CHIP 75 (1005)
R264	1-208-860-81	s	RES, CHIP 75 (1005)
R266	1-208-863-81	s	RES, CHIP 100 (1005)
R267	1-208-863-81	s	RES, CHIP 100 (1005)
R270	1-208-863-81	s	RES, CHIP 100 (1005)
R271	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-220-878-81	s	RES, CHIP 22 (1005)
R283	1-220-878-81	s	RES, CHIP 22 (1005)
R284	1-220-878-81	s	RES, CHIP 22 (1005)
R285	1-220-878-81	s	RES, CHIP 22 (1005)
R286	1-220-878-81	s	RES, CHIP 22 (1005)
R287	1-220-878-81	s	RES, CHIP 22 (1005)
R288	1-220-878-81	s	RES, CHIP 22 (1005)
R289	1-220-878-81	s	RES, CHIP 22 (1005)
R292	1-208-855-81	s	RES, CHIP 47 (1005)
R295	1-208-855-81	s	RES, CHIP 47 (1005)
R296	1-208-855-81	s	RES, CHIP 47 (1005)
R297	1-208-855-81	s	RES, CHIP 47 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R299	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-881-81	s	RES, CHIP 560 (1005)
R307	1-208-881-81	s	RES, CHIP 560 (1005)
R308	1-208-881-81	s	RES, CHIP 560 (1005)
R309	1-208-881-81	s	RES, CHIP 560 (1005)
R310	1-208-860-81	s	RES, CHIP 75 (1005)
R311	1-208-860-81	s	RES, CHIP 75 (1005)
R312	1-208-860-81	s	RES, CHIP 75 (1005)
R313	1-208-860-81	s	RES, CHIP 75 (1005)
R314	1-208-860-81	s	RES, CHIP 75 (1005)
R315	1-208-860-81	s	RES, CHIP 75 (1005)
R316	1-208-860-81	s	RES, CHIP 75 (1005)
R317	1-208-860-81	s	RES, CHIP 75 (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R322	1-208-863-81	s	RES, CHIP 100 (1005)
R324	1-208-863-81	s	RES, CHIP 100 (1005)
R325	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-220-878-81	s	RES, CHIP 22 (1005)
R338	1-220-878-81	s	RES, CHIP 22 (1005)
R339	1-220-878-81	s	RES, CHIP 22 (1005)
R347	1-208-855-81	s	RES, CHIP 47 (1005)
R349	1-208-855-81	s	RES, CHIP 47 (1005)
R350	1-208-855-81	s	RES, CHIP 47 (1005)
R354	1-208-855-81	s	RES, CHIP 47 (1005)
R358	1-208-883-81	s	RES, CHIP 680 (1005)
R359	1-208-883-81	s	RES, CHIP 680 (1005)
R361	1-208-860-81	s	RES, CHIP 75 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-860-81	s	RES, CHIP 75 (1005)
R365	1-208-860-81	s	RES, CHIP 75 (1005)
R367	1-208-871-81	s	RES, CHIP 220 (1005)
R368	1-208-871-81	s	RES, CHIP 220 (1005)
R369	1-208-871-81	s	RES, CHIP 220 (1005)
R370	1-208-871-81	s	RES, CHIP 220 (1005)
R373	1-208-911-81	s	RES, CHIP 10K (1005)
R374	1-208-911-81	s	RES, CHIP 10K (1005)
R376	1-208-911-81	s	RES, CHIP 10K (1005)
R377	1-208-860-81	s	RES, CHIP 75 (1005)
R379	1-208-889-81	s	RES, CHIP 1.2K (1005)
R380	1-208-895-81	s	RES, CHIP 2.2K (1005)
R381	1-208-887-81	s	RES, CHIP 1.0K (1005)
R383	1-208-889-81	s	RES, CHIP 1.2K (1005)
R384	1-208-895-81	s	RES, CHIP 2.2K (1005)
R385	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-208-867-81	s	RES, CHIP 150 (1005)
R404	1-208-861-81	s	RES, CHIP 82 (1005)
R405	1-208-867-81	s	RES, CHIP 150 (1005)
R406	1-208-861-81	s	RES, CHIP 82 (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R409	1-208-869-81	s	RES, CHIP 180 (1005)
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-208-863-81	s	RES, CHIP 100 (1005)
R414	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)
R423	1-220-878-81	s	RES, CHIP 22 (1005)
R424	1-208-887-81	s	RES, CHIP 1.0K (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R432	1-208-867-81	s	RES, CHIP 150 (1005)
R433	1-208-861-81	s	RES, CHIP 82 (1005)
R434	1-208-867-81	s	RES, CHIP 150 (1005)
R435	1-208-861-81	s	RES, CHIP 82 (1005)
R436	1-208-911-81	s	RES, CHIP 10K (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R438	1-208-869-81	s	RES, CHIP 180 (1005)
R439	1-208-911-81	s	RES, CHIP 10K (1005)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-885-81	s	RES, CHIP 820 (1005)
R463	1-208-911-81	s	RES, CHIP 10K (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R484	1-208-875-81	s	RES, CHIP 330 (1005)
R485	1-208-875-81	s	RES, CHIP 330 (1005)
R486	1-208-875-81	s	RES, CHIP 330 (1005)
R487	1-208-875-81	s	RES, CHIP 330 (1005)
R490	1-208-875-81	s	RES, CHIP 330 (1005)
R491	1-208-875-81	s	RES, CHIP 330 (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-871-81	s	RES, CHIP 220 (1005)
R506	1-208-871-81	s	RES, CHIP 220 (1005)
R507	1-208-871-81	s	RES, CHIP 220 (1005)
R508	1-208-871-81	s	RES, CHIP 220 (1005)
R509	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-855-81	s	RES, CHIP 47 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-855-81	s	RES, CHIP 47 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-855-81	s	RES, CHIP 47 (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R530	1-208-855-81	s	RES, CHIP 47 (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-911-81	s	RES, CHIP 10K (1005)
R612	1-208-911-81	s	RES, CHIP 10K (1005)
R613	1-208-911-81	s	RES, CHIP 10K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R618	1-208-911-81	s	RES, CHIP 10K (1005)
R619	1-208-863-81	s	RES, CHIP 100 (1005)
R620	1-208-863-81	s	RES, CHIP 100 (1005)
R621	1-208-911-81	s	RES, CHIP 10K (1005)
R622	1-208-911-81	s	RES, CHIP 10K (1005)
R623	1-208-911-81	s	RES, CHIP 10K (1005)
R624	1-208-911-81	s	RES, CHIP 10K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-911-81	s	RES, CHIP 10K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-894-81	s	RES, CHIP 2.0K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R630	1-208-894-81	s	RES, CHIP 2.0K (1005)
R631	1-208-894-81	s	RES, CHIP 2.0K (1005)
R632	1-208-911-81	s	RES, CHIP 10K (1005)
R635	1-208-911-81	s	RES, CHIP 10K (1005)
R636	1-208-911-81	s	RES, CHIP 10K (1005)
R637	1-208-911-81	s	RES, CHIP 10K (1005)
R638	1-208-911-81	s	RES, CHIP 10K (1005)
R639	1-208-911-81	s	RES, CHIP 10K (1005)
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-911-81	s	RES, CHIP 10K (1005)
R643	1-208-911-81	s	RES, CHIP 10K (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)
R645	1-208-911-81	s	RES, CHIP 10K (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-911-81	s	RES, CHIP 10K (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-208-911-81	s	RES, CHIP 10K (1005)
R652	1-208-911-81	s	RES, CHIP 10K (1005)
R653	1-208-911-81	s	RES, CHIP 10K (1005)
R654	1-208-911-81	s	RES, CHIP 10K (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R656	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-911-81	s	RES, CHIP 10K (1005)
R658	1-208-911-81	s	RES, CHIP 10K (1005)
R659	1-208-911-81	s	RES, CHIP 10K (1005)
R660	1-208-911-81	s	RES, CHIP 10K (1005)
R661	1-208-911-81	s	RES, CHIP 10K (1005)
R662	1-208-911-81	s	RES, CHIP 10K (1005)
R663	1-208-911-81	s	RES, CHIP 10K (1005)
R664	1-208-911-81	s	RES, CHIP 10K (1005)
R665	1-208-911-81	s	RES, CHIP 10K (1005)
R666	1-208-911-81	s	RES, CHIP 10K (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R670	1-208-911-81	s	RES, CHIP 10K (1005)
R671	1-208-911-81	s	RES, CHIP 10K (1005)
R672	1-208-911-81	s	RES, CHIP 10K (1005)
R674	1-208-887-81	s	RES, CHIP 1.0K (1005)
R676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R677	1-208-911-81	s	RES, CHIP 10K (1005)
R678	1-208-911-81	s	RES, CHIP 10K (1005)
R679	1-208-863-81	s	RES, CHIP 100 (1005)
R681	1-208-887-81	s	RES, CHIP 1.0K (1005)
R682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R683	1-208-855-81	s	RES, CHIP 47 (1005)
R684	1-208-855-81	s	RES, CHIP 47 (1005)
R685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R687	1-208-887-81	s	RES, CHIP 1.0K (1005)
R688	1-208-887-81	s	RES, CHIP 1.0K (1005)
R691	1-208-887-81	s	RES, CHIP 1.0K (1005)
R692	1-208-887-81	s	RES, CHIP 1.0K (1005)
R693	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R694	1-208-887-81	s	RES, CHIP 1.0K (1005)
R695	1-208-855-81	s	RES, CHIP 47 (1005)
R696	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R697	1-208-887-81	s	RES, CHIP 1.0K (1005)
R698	1-208-887-81	s	RES, CHIP 1.0K (1005)
R699	1-208-887-81	s	RES, CHIP 1.0K (1005)
R700	1-208-887-81	s	RES, CHIP 1.0K (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-208-911-81	s	RES, CHIP 10K (1005)
R715	1-208-887-81	s	RES, CHIP 1.0K (1005)
R716	1-208-887-81	s	RES, CHIP 1.0K (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R728	1-208-911-81	s	RES, CHIP 10K (1005)
R729	1-208-887-81	s	RES, CHIP 1.0K (1005)
R730	1-208-855-81	s	RES, CHIP 47 (1005)
R731	1-208-855-81	s	RES, CHIP 47 (1005)
R732	1-208-855-81	s	RES, CHIP 47 (1005)
R733	1-208-855-81	s	RES, CHIP 47 (1005)
R734	1-208-911-81	s	RES, CHIP 10K (1005)
R735	1-208-855-81	s	RES, CHIP 47 (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-911-81	s	RES, CHIP 10K (1005)
R738	1-208-911-81	s	RES, CHIP 10K (1005)
R739	1-208-911-81	s	RES, CHIP 10K (1005)
R740	1-208-911-81	s	RES, CHIP 10K (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-863-81	s	RES, CHIP 100 (1005)
R749	1-208-863-81	s	RES, CHIP 100 (1005)
R750	1-208-863-81	s	RES, CHIP 100 (1005)
R751	1-208-863-81	s	RES, CHIP 100 (1005)
R764	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R765	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R768	1-208-863-81	s	RES, CHIP 100 (1005)
R776	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R777	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R780	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R781	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R948	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R949	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R951	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R968	1-208-871-81	s	RES, CHIP 220 (1005)
R969	1-208-871-81	s	RES, CHIP 220 (1005)
R970	1-208-871-81	s	RES, CHIP 220 (1005)
R971	1-208-871-81	s	RES, CHIP 220 (1005)
R1027	1-220-878-81	s	RES, CHIP 22 (1005)
R1032	1-220-882-81	s	RES, CHIP 33 (1005)
R1033	1-220-882-81	s	RES, CHIP 33 (1005)
R1034	1-220-882-81	s	RES, CHIP 33 (1005)
R1035	1-220-882-81	s	RES, CHIP 33 (1005)
R1036	1-220-882-81	s	RES, CHIP 33 (1005)
R1037	1-220-882-81	s	RES, CHIP 33 (1005)
R1038	1-220-882-81	s	RES, CHIP 33 (1005)
R1039	1-220-882-81	s	RES, CHIP 33 (1005)
R1040	1-220-882-81	s	RES, CHIP 33 (1005)
R1041	1-220-882-81	s	RES, CHIP 33 (1005)
R1042	1-208-860-81	s	RES, CHIP 75 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1043	1-208-860-81	s	RES, CHIP 75 (1005)
R1044	1-208-860-81	s	RES, CHIP 75 (1005)
R1045	1-208-860-81	s	RES, CHIP 75 (1005)
R1046	1-208-860-81	s	RES, CHIP 75 (1005)
R1047	1-208-860-81	s	RES, CHIP 75 (1005)
R1056	1-220-882-81	s	RES, CHIP 33 (1005)
R1057	1-220-882-81	s	RES, CHIP 33 (1005)
R1058	1-208-911-81	s	RES, CHIP 10K (1005)
R1100	1-208-855-81	s	RES, CHIP 47 (1005)
R1101	1-208-855-81	s	RES, CHIP 47 (1005)
R1102	1-208-855-81	s	RES, CHIP 47 (1005)
R1103	1-208-855-81	s	RES, CHIP 47 (1005)
R1104	1-208-855-81	s	RES, CHIP 47 (1005)
R1105	1-208-855-81	s	RES, CHIP 47 (1005)
R1106	1-208-855-81	s	RES, CHIP 47 (1005)
R1107	1-208-855-81	s	RES, CHIP 47 (1005)
R1108	1-208-855-81	s	RES, CHIP 47 (1005)
R1109	1-208-855-81	s	RES, CHIP 47 (1005)
R1110	1-208-855-81	s	RES, CHIP 47 (1005)
R1111	1-208-855-81	s	RES, CHIP 47 (1005)
R1113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1114	1-220-870-81	s	RES, CHIP 10 (1005)
R1115	1-220-870-81	s	RES, CHIP 10 (1005)
R1116	1-220-870-81	s	RES, CHIP 10 (1005)
R1117	1-220-870-81	s	RES, CHIP 10 (1005)
R1118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1119	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1120	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1121	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1122	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1126	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1133	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1138	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1139	1-208-855-81	s	RES, CHIP 47 (1005)
R1140	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1141	1-208-855-81	s	RES, CHIP 47 (1005)
R1142	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1143	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1144	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1146	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1148	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1149	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1150	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1154	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1155	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1156	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1157	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1158	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1159	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1160	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1161	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1162	1-220-870-81	s	RES, CHIP 10 (1005)
R1163	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1174	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1175	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1176	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1177	1-208-911-81	s	RES, CHIP 10K (1005)
R1178	1-208-855-81	s	RES, CHIP 47 (1005)
R1179	1-208-855-81	s	RES, CHIP 47 (1005)
R1180	1-208-855-81	s	RES, CHIP 47 (1005)
R1181	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1182	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1183	1-208-855-81	s	RES, CHIP 47 (1005)
R1184	1-208-855-81	s	RES, CHIP 47 (1005)
R1185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1191	1-208-911-81	s	RES, CHIP 10K (1005)
R1192	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1194	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1195	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1196	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-208-855-81	s	RES, CHIP 47 (1005)
R1204	1-208-855-81	s	RES, CHIP 47 (1005)
R1205	1-208-855-81	s	RES, CHIP 47 (1005)
R1206	1-208-855-81	s	RES, CHIP 47 (1005)
R1207	1-208-855-81	s	RES, CHIP 47 (1005)
R1208	1-208-855-81	s	RES, CHIP 47 (1005)
R1209	1-208-855-81	s	RES, CHIP 47 (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)
R1212	1-220-870-81	s	RES, CHIP 10 (1005)
R1213	1-220-870-81	s	RES, CHIP 10 (1005)
R1216	1-208-911-81	s	RES, CHIP 10K (1005)
R1217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1219	1-208-911-81	s	RES, CHIP 10K (1005)
R1300	1-220-878-81	s	RES, CHIP 22 (1005)
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1302	1-208-863-81	s	RES, CHIP 100 (1005)
R1303	1-208-855-81	s	RES, CHIP 47 (1005)
R1304	1-208-855-81	s	RES, CHIP 47 (1005)
R1307	1-208-935-81	s	RES, CHIP 100K (1005)
R1308	1-208-855-81	s	RES, CHIP 47 (1005)
R1309	1-208-855-81	s	RES, CHIP 47 (1005)
R1310	1-208-935-81	s	RES, CHIP 100K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1311	1-208-855-81	s	RES, CHIP 47 (1005)
R1312	1-208-855-81	s	RES, CHIP 47 (1005)
R1313	1-208-935-81	s	RES, CHIP 100K (1005)
R1314	1-220-878-81	s	RES, CHIP 22 (1005)
R1315	1-220-878-81	s	RES, CHIP 22 (1005)
R1316	1-208-863-81	s	RES, CHIP 100 (1005)
R1317	1-220-882-81	s	RES, CHIP 33 (1005)
R1318	1-220-882-81	s	RES, CHIP 33 (1005)
R1321	1-208-935-81	s	RES, CHIP 100K (1005)
R1322	1-220-882-81	s	RES, CHIP 33 (1005)
R1323	1-220-882-81	s	RES, CHIP 33 (1005)
R1324	1-208-935-81	s	RES, CHIP 100K (1005)
R1325	1-220-882-81	s	RES, CHIP 33 (1005)
R1326	1-220-882-81	s	RES, CHIP 33 (1005)
R1327	1-208-935-81	s	RES, CHIP 100K (1005)
R1328	1-220-878-81	s	RES, CHIP 22 (1005)
R1329	1-220-878-81	s	RES, CHIP 22 (1005)
R1330	1-220-878-81	s	RES, CHIP 22 (1005)
R1331	1-220-878-81	s	RES, CHIP 22 (1005)
R1332	1-208-863-81	s	RES, CHIP 100 (1005)
R1333	1-208-863-81	s	RES, CHIP 100 (1005)
R1334	1-220-878-81	s	RES, CHIP 22 (1005)
R1335	1-220-878-81	s	RES, CHIP 22 (1005)
R1336	1-220-878-81	s	RES, CHIP 22 (1005)
R1337	1-220-878-81	s	RES, CHIP 22 (1005)
R1338	1-208-863-81	s	RES, CHIP 100 (1005)
R1339	1-208-863-81	s	RES, CHIP 100 (1005)
R1448	1-208-863-81	s	RES, CHIP 100 (1005)
R1449	1-208-863-81	s	RES, CHIP 100 (1005)
R1450	1-208-863-81	s	RES, CHIP 100 (1005)
R1451	1-208-863-81	s	RES, CHIP 100 (1005)
R1452	1-208-871-81	s	RES, CHIP 220 (1005)
R1453	1-208-871-81	s	RES, CHIP 220 (1005)
R1454	1-208-871-81	s	RES, CHIP 220 (1005)
R1455	1-208-871-81	s	RES, CHIP 220 (1005)
R1456	1-208-911-81	s	RES, CHIP 10K (1005)
R1501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1504	1-208-911-81	s	RES, CHIP 10K (1005)
R1505	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1512	1-220-878-81	s	RES, CHIP 22 (1005)
R1513	1-220-878-81	s	RES, CHIP 22 (1005)
R1514	1-220-878-81	s	RES, CHIP 22 (1005)
R1515	1-220-878-81	s	RES, CHIP 22 (1005)
R1516	1-220-878-81	s	RES, CHIP 22 (1005)
R1517	1-208-867-81	s	RES, CHIP 150 (1005)
R1519	1-220-878-81	s	RES, CHIP 22 (1005)
R1520	1-220-878-81	s	RES, CHIP 22 (1005)
R1521	1-220-878-81	s	RES, CHIP 22 (1005)
R1522	1-220-878-81	s	RES, CHIP 22 (1005)
R1523	1-220-878-81	s	RES, CHIP 22 (1005)
R1524	1-208-867-81	s	RES, CHIP 150 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1619	1-208-911-81	s	RES, CHIP 10K (1005)
R1620	1-208-911-81	s	RES, CHIP 10K (1005)
R1621	1-208-911-81	s	RES, CHIP 10K (1005)
R1622	1-208-911-81	s	RES, CHIP 10K (1005)
R1623	1-208-911-81	s	RES, CHIP 10K (1005)
R1624	1-208-911-81	s	RES, CHIP 10K (1005)
R1625	1-208-911-81	s	RES, CHIP 10K (1005)
R1626	1-208-911-81	s	RES, CHIP 10K (1005)
R1627	1-208-911-81	s	RES, CHIP 10K (1005)
R1628	1-208-911-81	s	RES, CHIP 10K (1005)
R1629	1-208-911-81	s	RES, CHIP 10K (1005)
R1630	1-208-911-81	s	RES, CHIP 10K (1005)
R1631	1-208-911-81	s	RES, CHIP 10K (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-911-81	s	RES, CHIP 10K (1005)
R1634	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1635	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1636	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1641	1-208-863-81	s	RES, CHIP 100 (1005)
R1642	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1643	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1644	1-208-911-81	s	RES, CHIP 10K (1005)
R1645	1-208-911-81	s	RES, CHIP 10K (1005)
R1646	1-208-911-81	s	RES, CHIP 10K (1005)
R1647	1-208-911-81	s	RES, CHIP 10K (1005)
R1648	1-208-911-81	s	RES, CHIP 10K (1005)
R1649	1-208-911-81	s	RES, CHIP 10K (1005)
R1650	1-208-911-81	s	RES, CHIP 10K (1005)
R1651	1-208-911-81	s	RES, CHIP 10K (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-208-911-81	s	RES, CHIP 10K (1005)
R1655	1-208-911-81	s	RES, CHIP 10K (1005)
R1656	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1657	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1658	1-208-863-81	s	RES, CHIP 100 (1005)
R1659	1-208-863-81	s	RES, CHIP 100 (1005)
R1660	1-208-863-81	s	RES, CHIP 100 (1005)
R1661	1-208-863-81	s	RES, CHIP 100 (1005)
R1663	1-208-863-81	s	RES, CHIP 100 (1005)
R1664	1-208-863-81	s	RES, CHIP 100 (1005)
R1666	1-208-863-81	s	RES, CHIP 100 (1005)
R1667	1-208-863-81	s	RES, CHIP 100 (1005)
R1668	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1669	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1670	1-208-855-81	s	RES, CHIP 47 (1005)
R1671	1-208-855-81	s	RES, CHIP 47 (1005)
R1672	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1673	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1674	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1675	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1678	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1679	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1680	1-208-863-81	s	RES, CHIP 100 (1005)
R1681	1-208-863-81	s	RES, CHIP 100 (1005)
R1682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1683	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1684	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1687	1-208-855-81	s	RES, CHIP 47 (1005)
R1688	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1689	1-208-855-81	s	RES, CHIP 47 (1005)
R1690	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1691	1-208-855-81	s	RES, CHIP 47 (1005)
R1692	1-208-855-81	s	RES, CHIP 47 (1005)
R1693	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1694	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1695	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1696	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1697	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1698	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1699	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1700	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1701	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1702	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1703	1-208-911-81	s	RES, CHIP 10K (1005)
R1705	1-208-911-81	s	RES, CHIP 10K (1005)
R1706	1-208-911-81	s	RES, CHIP 10K (1005)
R1707	1-208-911-81	s	RES, CHIP 10K (1005)
R1708	1-208-911-81	s	RES, CHIP 10K (1005)
R1709	1-208-911-81	s	RES, CHIP 10K (1005)
R1710	1-208-911-81	s	RES, CHIP 10K (1005)
R1715	1-208-911-81	s	RES, CHIP 10K (1005)
R1716	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1717	1-208-855-81	s	RES, CHIP 47 (1005)
R1718	1-208-855-81	s	RES, CHIP 47 (1005)
R1719	1-208-855-81	s	RES, CHIP 47 (1005)
R1720	1-208-855-81	s	RES, CHIP 47 (1005)
R1721	1-208-911-81	s	RES, CHIP 10K (1005)
R1722	1-208-911-81	s	RES, CHIP 10K (1005)
R1723	1-208-855-81	s	RES, CHIP 47 (1005)
R1724	1-208-911-81	s	RES, CHIP 10K (1005)
R1725	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1726	1-208-911-81	s	RES, CHIP 10K (1005)
R1727	1-208-911-81	s	RES, CHIP 10K (1005)
R1728	1-208-911-81	s	RES, CHIP 10K (1005)
R1729	1-208-911-81	s	RES, CHIP 10K (1005)
R1730	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1731	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1733	1-208-863-81	s	RES, CHIP 100 (1005)
R1737	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1748	1-208-863-81	s	RES, CHIP 100 (1005)
R1749	1-208-863-81	s	RES, CHIP 100 (1005)
R1753	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1754	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1757	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1758	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1900	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-855-81	s	RES, CHIP 47 (1005)
R1902	1-208-855-81	s	RES, CHIP 47 (1005)
R1903	1-208-855-81	s	RES, CHIP 47 (1005)
R1904	1-208-855-81	s	RES, CHIP 47 (1005)
R1905	1-208-855-81	s	RES, CHIP 47 (1005)
R1906	1-208-855-81	s	RES, CHIP 47 (1005)
R1907	1-208-855-81	s	RES, CHIP 47 (1005)
R1908	1-208-855-81	s	RES, CHIP 47 (1005)
R1909	1-208-855-81	s	RES, CHIP 47 (1005)
R1910	1-208-855-81	s	RES, CHIP 47 (1005)
R1911	1-208-855-81	s	RES, CHIP 47 (1005)
R1912	1-208-871-81	s	RES, CHIP 220 (1005)
R1913	1-208-871-81	s	RES, CHIP 220 (1005)
R1914	1-208-871-81	s	RES, CHIP 220 (1005)
R1915	1-208-871-81	s	RES, CHIP 220 (1005)
R1916	1-208-863-81	s	RES, CHIP 100 (1005)
R1917	1-208-863-81	s	RES, CHIP 100 (1005)
R1918	1-208-863-81	s	RES, CHIP 100 (1005)
R1919	1-208-863-81	s	RES, CHIP 100 (1005)
R1920	1-208-855-81	s	RES, CHIP 47 (1005)
R1921	1-208-855-81	s	RES, CHIP 47 (1005)
R1922	1-208-911-81	s	RES, CHIP 10K (1005)
R1923	1-208-911-81	s	RES, CHIP 10K (1005)
R1924	1-208-911-81	s	RES, CHIP 10K (1005)
R1925	1-208-911-81	s	RES, CHIP 10K (1005)
R1926	1-208-911-81	s	RES, CHIP 10K (1005)
R1927	1-208-911-81	s	RES, CHIP 10K (1005)
R1928	1-208-911-81	s	RES, CHIP 10K (1005)
R1929	1-208-911-81	s	RES, CHIP 10K (1005)
R1930	1-208-911-81	s	RES, CHIP 10K (1005)
R1931	1-208-911-81	s	RES, CHIP 10K (1005)
R1932	1-208-911-81	s	RES, CHIP 10K (1005)
R1933	1-208-911-81	s	RES, CHIP 10K (1005)
R1934	1-208-911-81	s	RES, CHIP 10K (1005)
R1935	1-208-911-81	s	RES, CHIP 10K (1005)
R1936	1-208-911-81	s	RES, CHIP 10K (1005)
R1937	1-208-911-81	s	RES, CHIP 10K (1005)
R1938	1-208-911-81	s	RES, CHIP 10K (1005)
R1939	1-208-911-81	s	RES, CHIP 10K (1005)
R1940	1-208-911-81	s	RES, CHIP 10K (1005)
R1941	1-208-911-81	s	RES, CHIP 10K (1005)
R1942	1-208-911-81	s	RES, CHIP 10K (1005)
R1943	1-208-911-81	s	RES, CHIP 10K (1005)
R1944	1-208-911-81	s	RES, CHIP 10K (1005)
R1945	1-208-911-81	s	RES, CHIP 10K (1005)
R1946	1-208-911-81	s	RES, CHIP 10K (1005)
R1947	1-208-911-81	s	RES, CHIP 10K (1005)
R1948	1-208-911-81	s	RES, CHIP 10K (1005)
R1949	1-208-911-81	s	RES, CHIP 10K (1005)
R1950	1-208-911-81	s	RES, CHIP 10K (1005)
R1951	1-208-911-81	s	RES, CHIP 10K (1005)
R1952	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1953	1-208-911-81	s	RES, CHIP 10K (1005)
R1954	1-208-911-81	s	RES, CHIP 10K (1005)
R1955	1-208-911-81	s	RES, CHIP 10K (1005)
R1956	1-208-911-81	s	RES, CHIP 10K (1005)
R1957	1-208-911-81	s	RES, CHIP 10K (1005)
R1958	1-208-911-81	s	RES, CHIP 10K (1005)
R1959	1-208-911-81	s	RES, CHIP 10K (1005)
R1960	1-208-911-81	s	RES, CHIP 10K (1005)
R1961	1-208-911-81	s	RES, CHIP 10K (1005)
R1962	1-208-911-81	s	RES, CHIP 10K (1005)
R1963	1-208-855-81	s	RES, CHIP 47 (1005)
R1964	1-208-855-81	s	RES, CHIP 47 (1005)
R1965	1-208-855-81	s	RES, CHIP 47 (1005)
R1966	1-208-855-81	s	RES, CHIP 47 (1005)
R1967	1-208-855-81	s	RES, CHIP 47 (1005)
R1968	1-208-855-81	s	RES, CHIP 47 (1005)
R1969	1-208-855-81	s	RES, CHIP 47 (1005)
R1970	1-208-855-81	s	RES, CHIP 47 (1005)
R2000	1-208-861-81	s	RES, CHIP 82 (1005)
R2001	1-208-861-81	s	RES, CHIP 82 (1005)
R2002	1-208-859-81	s	RES, CHIP 68 (1005)
R2003	1-208-859-81	s	RES, CHIP 68 (1005)
R2005	1-208-855-81	s	RES, CHIP 47 (1005)
R2006	1-208-859-81	s	RES, CHIP 68 (1005)
R2007	1-208-855-81	s	RES, CHIP 47 (1005)
R2008	1-208-859-81	s	RES, CHIP 68 (1005)
R2011	1-208-855-81	s	RES, CHIP 47 (1005)
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2016	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2017	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2018	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-220-870-81	s	RES, CHIP 10 (1005)
R2040	1-220-870-81	s	RES, CHIP 10 (1005)
R2041	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2042	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2043	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2044	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2045	1-220-870-81	s	RES, CHIP 10 (1005)
R2046	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2059	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2061	1-208-855-81	s	RES, CHIP 47 (1005)
R2062	1-208-855-81	s	RES, CHIP 47 (1005)
R2063	1-208-855-81	s	RES, CHIP 47 (1005)
R2064	1-208-855-81	s	RES, CHIP 47 (1005)
R2065	1-208-911-81	s	RES, CHIP 10K (1005)
R2070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2071	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2076	1-208-911-81	s	RES, CHIP 10K (1005)
R2080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-220-878-81	s	RES, CHIP 22 (1005)
R2109	1-220-878-81	s	RES, CHIP 22 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-855-81	s	RES, CHIP 47 (1005)
R2114	1-208-863-81	s	RES, CHIP 100 (1005)
R2115	1-208-863-81	s	RES, CHIP 100 (1005)
R2116	1-208-863-81	s	RES, CHIP 100 (1005)
R2117	1-208-863-81	s	RES, CHIP 100 (1005)
R2118	1-208-863-81	s	RES, CHIP 100 (1005)
R2119	1-208-863-81	s	RES, CHIP 100 (1005)
R2120	1-208-863-81	s	RES, CHIP 100 (1005)
R2121	1-208-863-81	s	RES, CHIP 100 (1005)
R2122	1-208-863-81	s	RES, CHIP 100 (1005)
R2123	1-208-863-81	s	RES, CHIP 100 (1005)
R2124	1-208-863-81	s	RES, CHIP 100 (1005)
R2125	1-208-863-81	s	RES, CHIP 100 (1005)
R2126	1-208-863-81	s	RES, CHIP 100 (1005)
R2127	1-208-863-81	s	RES, CHIP 100 (1005)
R2128	1-208-863-81	s	RES, CHIP 100 (1005)
R2129	1-208-863-81	s	RES, CHIP 100 (1005)
R2130	1-208-863-81	s	RES, CHIP 100 (1005)
R2131	1-208-863-81	s	RES, CHIP 100 (1005)
R2132	1-208-863-81	s	RES, CHIP 100 (1005)
R2133	1-208-863-81	s	RES, CHIP 100 (1005)
R2134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2139	1-208-911-81	s	RES, CHIP 10K (1005)
R2142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2145	1-208-911-81	s	RES, CHIP 10K (1005)
R2146	1-208-911-81	s	RES, CHIP 10K (1005)
R2147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2148	1-208-911-81	s	RES, CHIP 10K (1005)
R2149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2150	1-208-911-81	s	RES, CHIP 10K (1005)
R2152	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2157	1-208-935-81	s	RES, CHIP 100K (1005)
R2158	1-208-935-81	s	RES, CHIP 100K (1005)
R2159	1-208-855-81	s	RES, CHIP 47 (1005)
R2160	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2161	1-208-855-81	s	RES, CHIP 47 (1005)
R2162	1-208-855-81	s	RES, CHIP 47 (1005)
R2163	1-208-855-81	s	RES, CHIP 47 (1005)
R2200	1-208-935-81	s	RES, CHIP 100K (1005)
R2201	1-208-935-81	s	RES, CHIP 100K (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-927-81	s	RES, CHIP 47K (1005)
R2205	1-208-927-81	s	RES, CHIP 47K (1005)
R2206	1-208-863-81	s	RES, CHIP 100 (1005)
R2207	1-208-863-81	s	RES, CHIP 100 (1005)
R2208	1-208-935-81	s	RES, CHIP 100K (1005)
R2211	1-208-935-81	s	RES, CHIP 100K (1005)
R2214	1-208-881-81	s	RES, CHIP 560 (1005)
R2215	1-208-935-81	s	RES, CHIP 100K (1005)
R2216	1-208-881-81	s	RES, CHIP 560 (1005)
R2217	1-208-935-81	s	RES, CHIP 100K (1005)
R2220	1-208-871-81	s	RES, CHIP 220 (1005)
R2221	1-208-870-81	s	RES, CHIP 200 (1005)
R2222	1-208-911-81	s	RES, CHIP 10K (1005)
R2223	1-208-911-81	s	RES, CHIP 10K (1005)
R2224	1-208-911-81	s	RES, CHIP 10K (1005)
R2225	1-208-911-81	s	RES, CHIP 10K (1005)
R2226	1-208-867-81	s	RES, CHIP 150 (1005)
R2227	1-208-867-81	s	RES, CHIP 150 (1005)
R2228	1-220-876-81	s	RES, CHIP 18 (1005)
R2229	1-208-861-81	s	RES, CHIP 82 (1005)
R2230	1-220-876-81	s	RES, CHIP 18 (1005)
R2231	1-208-861-81	s	RES, CHIP 82 (1005)
R2232	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2233	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2234	1-208-867-81	s	RES, CHIP 150 (1005)
R2235	1-208-867-81	s	RES, CHIP 150 (1005)
R2236	1-208-867-81	s	RES, CHIP 150 (1005)
R2237	1-208-867-81	s	RES, CHIP 150 (1005)
R2238	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2239	1-208-911-81	s	RES, CHIP 10K (1005)
R2240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2241	1-208-911-81	s	RES, CHIP 10K (1005)
R2242	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2243	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2244	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2245	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2246	1-218-903-91	s	RES, CHIP 220K (1608)
R2247	1-218-903-91	s	RES, CHIP 220K (1608)
R2248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2249	1-208-927-81	s	RES, CHIP 47K (1005)
R2250	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2251	1-208-927-81	s	RES, CHIP 47K (1005)
R2252	1-220-870-81	s	RES, CHIP 10 (1005)
R2253	1-220-870-81	s	RES, CHIP 10 (1005)
R2254	1-208-935-81	s	RES, CHIP 100K (1005)
R2255	1-208-935-81	s	RES, CHIP 100K (1005)
R2256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2258	1-208-855-81	s	RES, CHIP 47 (1005)
R2259	1-208-899-81	s	RES, CHIP 3.3K (1005)
R2260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2261	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2262	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2263	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2264	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2265	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2266	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2268	1-208-919-81	s	RES, CHIP 22K (1005)
R2269	1-208-919-81	s	RES, CHIP 22K (1005)
R2270	1-208-860-81	s	RES, CHIP 75 (1005)
R2271	1-208-860-81	s	RES, CHIP 75 (1005)
R2272	1-208-860-81	s	RES, CHIP 75 (1005)
R2273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2274	1-208-860-81	s	RES, CHIP 75 (1005)
R2275	1-208-863-81	s	RES, CHIP 100 (1005)
R2276	1-208-863-81	s	RES, CHIP 100 (1005)
R2282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2285	1-220-870-81	s	RES, CHIP 10 (1005)
R2289	1-220-870-81	s	RES, CHIP 10 (1005)
R2293	1-220-870-81	s	RES, CHIP 10 (1005)
R2294	1-220-870-81	s	RES, CHIP 10 (1005)
R2295	1-208-863-81	s	RES, CHIP 100 (1005)
R2297	1-208-863-81	s	RES, CHIP 100 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-208-855-81	s	RES, CHIP 47 (1005)
R2307	1-208-911-81	s	RES, CHIP 10K (1005)
R2308	1-208-911-81	s	RES, CHIP 10K (1005)
R2309	1-208-911-81	s	RES, CHIP 10K (1005)
R2310	1-208-911-81	s	RES, CHIP 10K (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-855-81	s	RES, CHIP 47 (1005)
R2313	1-208-855-81	s	RES, CHIP 47 (1005)
R2314	1-208-855-81	s	RES, CHIP 47 (1005)
R2315	1-208-855-81	s	RES, CHIP 47 (1005)
R2316	1-208-855-81	s	RES, CHIP 47 (1005)
R2317	1-208-855-81	s	RES, CHIP 47 (1005)
R2318	1-208-855-81	s	RES, CHIP 47 (1005)
R2319	1-208-855-81	s	RES, CHIP 47 (1005)
R2320	1-208-855-81	s	RES, CHIP 47 (1005)
R2321	1-208-855-81	s	RES, CHIP 47 (1005)
R2322	1-208-855-81	s	RES, CHIP 47 (1005)
R2323	1-208-855-81	s	RES, CHIP 47 (1005)
R2324	1-208-855-81	s	RES, CHIP 47 (1005)
R2325	1-208-855-81	s	RES, CHIP 47 (1005)
R2326	1-208-855-81	s	RES, CHIP 47 (1005)
R2327	1-208-911-81	s	RES, CHIP 10K (1005)
R2328	1-208-911-81	s	RES, CHIP 10K (1005)
R2329	1-208-911-81	s	RES, CHIP 10K (1005)
R2330	1-208-911-81	s	RES, CHIP 10K (1005)
R2331	1-208-911-81	s	RES, CHIP 10K (1005)
R2332	1-208-911-81	s	RES, CHIP 10K (1005)
R2334	1-208-855-81	s	RES, CHIP 47 (1005)
R2335	1-208-855-81	s	RES, CHIP 47 (1005)
R2336	1-208-855-81	s	RES, CHIP 47 (1005)
R2337	1-208-855-81	s	RES, CHIP 47 (1005)
R2339	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2340	1-208-855-81	s	RES, CHIP 47 (1005)
R2341	1-208-855-81	s	RES, CHIP 47 (1005)
R2342	1-208-855-81	s	RES, CHIP 47 (1005)
R2343	1-208-855-81	s	RES, CHIP 47 (1005)
R2344	1-208-855-81	s	RES, CHIP 47 (1005)
R2345	1-208-855-81	s	RES, CHIP 47 (1005)
R2346	1-208-855-81	s	RES, CHIP 47 (1005)
R2347	1-208-855-81	s	RES, CHIP 47 (1005)
R2348	1-208-911-81	s	RES, CHIP 10K (1005)
R2349	1-208-855-81	s	RES, CHIP 47 (1005)
R2350	1-208-911-81	s	RES, CHIP 10K (1005)
R2351	1-208-855-81	s	RES, CHIP 47 (1005)
R2352	1-208-855-81	s	RES, CHIP 47 (1005)
R2353	1-208-855-81	s	RES, CHIP 47 (1005)
R2354	1-208-855-81	s	RES, CHIP 47 (1005)
R2355	1-208-855-81	s	RES, CHIP 47 (1005)
R2401	1-208-935-81	s	RES, CHIP 100K (1005)
R2403	1-208-935-81	s	RES, CHIP 100K (1005)
R2404	1-208-911-81	s	RES, CHIP 10K (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2408	1-208-855-81	s	RES, CHIP 47 (1005)
R2409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-208-911-81	s	RES, CHIP 10K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-855-81	s	RES, CHIP 47 (1005)
R2414	1-220-878-81	s	RES, CHIP 22 (1005)
R2415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2417	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2418	1-220-878-81	s	RES, CHIP 22 (1005)
R2419	1-220-878-81	s	RES, CHIP 22 (1005)
R2420	1-220-878-81	s	RES, CHIP 22 (1005)
R2421	1-220-878-81	s	RES, CHIP 22 (1005)
R2422	1-220-878-81	s	RES, CHIP 22 (1005)
R2423	1-220-878-81	s	RES, CHIP 22 (1005)
R2424	1-220-878-81	s	RES, CHIP 22 (1005)
R2425	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-208-911-81	s	RES, CHIP 10K (1005)
R2430	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2437	1-208-911-81	s	RES, CHIP 10K (1005)
R2440	1-208-911-81	s	RES, CHIP 10K (1005)
R2444	1-208-911-81	s	RES, CHIP 10K (1005)
R2445	1-208-911-81	s	RES, CHIP 10K (1005)
R2446	1-208-855-81	s	RES, CHIP 47 (1005)
R2447	1-208-911-81	s	RES, CHIP 10K (1005)
R2448	1-208-911-81	s	RES, CHIP 10K (1005)
R2449	1-208-911-81	s	RES, CHIP 10K (1005)
R2450	1-208-911-81	s	RES, CHIP 10K (1005)
R2451	1-208-911-81	s	RES, CHIP 10K (1005)
R2452	1-208-911-81	s	RES, CHIP 10K (1005)
R2453	1-208-911-81	s	RES, CHIP 10K (1005)
R2454	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2455	1-208-911-81	s	RES, CHIP 10K (1005)
R2456	1-208-911-81	s	RES, CHIP 10K (1005)
R2457	1-208-911-81	s	RES, CHIP 10K (1005)
R2458	1-208-911-81	s	RES, CHIP 10K (1005)
R2459	1-208-911-81	s	RES, CHIP 10K (1005)
R2460	1-208-855-81	s	RES, CHIP 47 (1005)
R2461	1-208-911-81	s	RES, CHIP 10K (1005)
R2462	1-208-911-81	s	RES, CHIP 10K (1005)
R2463	1-208-911-81	s	RES, CHIP 10K (1005)
R2464	1-208-911-81	s	RES, CHIP 10K (1005)
R2465	1-208-855-81	s	RES, CHIP 47 (1005)
R2466	1-208-855-81	s	RES, CHIP 47 (1005)
R2467	1-208-855-81	s	RES, CHIP 47 (1005)
R2468	1-208-855-81	s	RES, CHIP 47 (1005)
R2469	1-208-911-81	s	RES, CHIP 10K (1005)
R2470	1-208-911-81	s	RES, CHIP 10K (1005)
R2471	1-208-855-81	s	RES, CHIP 47 (1005)
R2472	1-208-855-81	s	RES, CHIP 47 (1005)
R2473	1-208-855-81	s	RES, CHIP 47 (1005)
R2474	1-208-855-81	s	RES, CHIP 47 (1005)
R2475	1-208-855-81	s	RES, CHIP 47 (1005)
R2476	1-208-855-81	s	RES, CHIP 47 (1005)
R2479	1-208-871-81	s	RES, CHIP 220 (1005)
R2480	1-208-871-81	s	RES, CHIP 220 (1005)
R2481	1-208-871-81	s	RES, CHIP 220 (1005)
R2483	1-208-911-81	s	RES, CHIP 10K (1005)
R2484	1-208-875-81	s	RES, CHIP 330 (1005)
R2485	1-208-911-81	s	RES, CHIP 10K (1005)
R2486	1-208-855-81	s	RES, CHIP 47 (1005)
R2487	1-208-855-81	s	RES, CHIP 47 (1005)
R2500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2502	1-208-911-81	s	RES, CHIP 10K (1005)
R2503	1-208-911-81	s	RES, CHIP 10K (1005)
R2504	1-208-911-81	s	RES, CHIP 10K (1005)
R2505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2508	1-208-911-81	s	RES, CHIP 10K (1005)
R2509	1-208-911-81	s	RES, CHIP 10K (1005)
R2510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2512	1-208-911-81	s	RES, CHIP 10K (1005)
R2513	1-208-911-81	s	RES, CHIP 10K (1005)
R2514	1-208-911-81	s	RES, CHIP 10K (1005)
R2515	1-208-911-81	s	RES, CHIP 10K (1005)
R2516	1-208-911-81	s	RES, CHIP 10K (1005)
R2517	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2518	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2519	1-208-855-81	s	RES, CHIP 47 (1005)
R2520	1-208-855-81	s	RES, CHIP 47 (1005)
R2521	1-208-855-81	s	RES, CHIP 47 (1005)
R2522	1-208-855-81	s	RES, CHIP 47 (1005)
R2523	1-208-855-81	s	RES, CHIP 47 (1005)
R2524	1-208-855-81	s	RES, CHIP 47 (1005)
R2525	1-208-855-81	s	RES, CHIP 47 (1005)
R2526	1-208-855-81	s	RES, CHIP 47 (1005)
R2527	1-208-855-81	s	RES, CHIP 47 (1005)
R2528	1-208-867-81	s	RES, CHIP 150 (1005)
R2530	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2535	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2536	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2538	1-208-855-81	s	RES, CHIP 47 (1005)
R2539	1-208-855-81	s	RES, CHIP 47 (1005)
R2542	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2544	1-208-855-81	s	RES, CHIP 47 (1005)
R2545	1-208-855-81	s	RES, CHIP 47 (1005)
R2546	1-208-855-81	s	RES, CHIP 47 (1005)
R2547	1-208-855-81	s	RES, CHIP 47 (1005)
R2548	1-208-911-81	s	RES, CHIP 10K (1005)
R2549	1-208-911-81	s	RES, CHIP 10K (1005)
R2550	1-208-911-81	s	RES, CHIP 10K (1005)
R2551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2553	1-208-911-81	s	RES, CHIP 10K (1005)
R2554	1-208-911-81	s	RES, CHIP 10K (1005)
R2555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2556	1-208-911-81	s	RES, CHIP 10K (1005)
R2557	1-208-855-81	s	RES, CHIP 47 (1005)
R2558	1-208-855-81	s	RES, CHIP 47 (1005)
R2559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2567	1-208-855-81	s	RES, CHIP 47 (1005)
R2568	1-208-855-81	s	RES, CHIP 47 (1005)
R2569	1-208-863-81	s	RES, CHIP 100 (1005)
R2570	1-208-863-81	s	RES, CHIP 100 (1005)
R2571	1-208-863-81	s	RES, CHIP 100 (1005)
R2572	1-208-863-81	s	RES, CHIP 100 (1005)
R2645	1-208-911-81	s	RES, CHIP 10K (1005)
R2650	1-208-911-81	s	RES, CHIP 10K (1005)
R2651	1-208-911-81	s	RES, CHIP 10K (1005)
R2652	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2653	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2654	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2655	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2656	1-220-870-81	s	RES, CHIP 10 (1005)
R2657	1-220-870-81	s	RES, CHIP 10 (1005)
R2659	1-220-870-81	s	RES, CHIP 10 (1005)
R2660	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2663	1-208-911-81	s	RES, CHIP 10K (1005)
R2664	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2665	1-208-911-81	s	RES, CHIP 10K (1005)
R2666	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2667	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2668	1-208-919-81	s	RES, CHIP 22K (1005)
R2669	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2670	1-208-894-81	s	RES, CHIP 2.0K (1005)
R2671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2673	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R2674	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2675	1-208-911-81	s	RES, CHIP 10K (1005)
R2676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2678	1-208-919-81	s	RES, CHIP 22K (1005)
R2679	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2680	1-208-894-81	s	RES, CHIP 2.0K (1005)
R2681	1-208-855-81	s	RES, CHIP 47 (1005)
R2683	1-208-855-81	s	RES, CHIP 47 (1005)
R3000	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3002	1-208-863-81	s	RES, CHIP 100 (1005)
R3003	1-208-863-81	s	RES, CHIP 100 (1005)
R3004	1-208-863-81	s	RES, CHIP 100 (1005)
R3005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3006	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3008	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3009	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3010	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3011	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3012	1-208-911-81	s	RES, CHIP 10K (1005)
R3013	1-208-911-81	s	RES, CHIP 10K (1005)
R3014	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3015	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)
R3017	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-897-81	s	RES, CHIP 2.7K (1005)
R3019	1-208-897-81	s	RES, CHIP 2.7K (1005)
R3020	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3021	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3022	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3023	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3024	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3026	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3028	1-220-870-81	s	RES, CHIP 10 (1005)
R3029	1-220-870-81	s	RES, CHIP 10 (1005)
R3030	1-220-870-81	s	RES, CHIP 10 (1005)
R3031	1-220-870-81	s	RES, CHIP 10 (1005)
R3032	1-208-855-81	s	RES, CHIP 47 (1005)
R3033	1-208-855-81	s	RES, CHIP 47 (1005)
R3034	1-208-855-81	s	RES, CHIP 47 (1005)
R3036	1-208-911-81	s	RES, CHIP 10K (1005)
R3037	1-208-855-81	s	RES, CHIP 47 (1005)
R3038	1-220-870-81	s	RES, CHIP 10 (1005)
R3039	1-220-870-81	s	RES, CHIP 10 (1005)
R3040	1-220-870-81	s	RES, CHIP 10 (1005)
R3041	1-220-870-81	s	RES, CHIP 10 (1005)
R3042	1-208-855-81	s	RES, CHIP 47 (1005)
R3043	1-208-855-81	s	RES, CHIP 47 (1005)
R3044	1-208-855-81	s	RES, CHIP 47 (1005)
R3045	1-208-861-81	s	RES, CHIP 82 (1005)
R3046	1-208-861-81	s	RES, CHIP 82 (1005)
R3047	1-208-884-81	s	RES, CHIP 750 (1005)
R3048	1-208-884-81	s	RES, CHIP 750 (1005)
R3049	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3050	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3300	1-208-879-81	s	RES, CHIP 470 (1005)
R3301	1-208-879-81	s	RES, CHIP 470 (1005)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
R3302	1-208-879-81	s	RES, CHIP 470 (1005)
R3303	1-208-879-81	s	RES, CHIP 470 (1005)
R3304	1-208-879-81	s	RES, CHIP 470 (1005)
R3306	1-208-879-81	s	RES, CHIP 470 (1005)
R3307	1-208-879-81	s	RES, CHIP 470 (1005)
R3308	1-208-879-81	s	RES, CHIP 470 (1005)
R3313	1-208-863-81	s	RES, CHIP 100 (1005)
R3314	1-208-863-81	s	RES, CHIP 100 (1005)
R3315	1-208-863-81	s	RES, CHIP 100 (1005)
R3316	1-208-863-81	s	RES, CHIP 100 (1005)
R3317	1-208-863-81	s	RES, CHIP 100 (1005)
R3318	1-208-863-81	s	RES, CHIP 100 (1005)
R3319	1-208-863-81	s	RES, CHIP 100 (1005)
R3320	1-208-863-81	s	RES, CHIP 100 (1005)
R3321	1-208-865-81	s	RES, CHIP 120 (1005)
R3322	1-208-865-81	s	RES, CHIP 120 (1005)
R3323	1-208-863-81	s	RES, CHIP 100 (1005)
R3324	1-208-863-81	s	RES, CHIP 100 (1005)
R3325	1-208-865-81	s	RES, CHIP 120 (1005)
R3326	1-208-865-81	s	RES, CHIP 120 (1005)
R3327	1-208-863-81	s	RES, CHIP 100 (1005)
R3328	1-208-865-81	s	RES, CHIP 120 (1005)
R3329	1-208-865-81	s	RES, CHIP 120 (1005)
R3330	1-208-855-81	s	RES, CHIP 47 (1005)
R3331	1-208-855-81	s	RES, CHIP 47 (1005)
R3332	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3333	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3334	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3335	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3336	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3338	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3339	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3340	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB101	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB104	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB106	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB512	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB513	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB514	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB515	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB516	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB517	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
RB518	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB602	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB901	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB902	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB903	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB904	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB905	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB906	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB907	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB908	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB909	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB910	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB911	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB912	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1103	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2109	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2110	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2111	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2403	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2410	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2411	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2412	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
RB2413	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2416	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2417	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2419	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2420	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2422	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2423	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2425	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2426	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2427	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2428	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2429	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2500	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2501	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2507	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2508	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2509	1-234-381-21	s	RES, NETWORK 100K (1005X4)
S501	1-692-270-41	s	SWITCH, SLIDE
S900	1-692-270-41	s	SWITCH, SLIDE
S1400	1-692-270-41	s	SWITCH, SLIDE
S1900	1-692-270-41	s	SWITCH, SLIDE
S2401	1-771-721-21	s	SWITCH, TACTILE
S2402	1-692-270-41	s	SWITCH, SLIDE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP504	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1900	1-535-877-22	s	CHIP, CHECKER
TP1901	1-535-877-22	s	CHIP, CHECKER
TP1902	1-535-877-22	s	CHIP, CHECKER
TP1903	1-535-877-22	s	CHIP, CHECKER
TP2100	1-535-877-22	s	CHIP, CHECKER
TP2101	1-535-877-22	s	CHIP, CHECKER
TP2200	1-535-877-22	s	CHIP, CHECKER
TP2201	1-535-877-22	s	CHIP, CHECKER
TP2300	1-535-877-22	s	CHIP, CHECKER
TP2301	1-535-877-22	s	CHIP, CHECKER
TP2302	1-535-877-22	s	CHIP, CHECKER

(HIF-56 BOARD (SUFFIX 11))

Ref. No. or Q'ty	Part No.	SP	Description
TP2303	1-535-877-22	s	CHIP, CHECKER
TP2401	1-535-877-22	s	CHIP, CHECKER
TP2402	1-535-877-22	s	CHIP, CHECKER
TP2403	1-535-877-22	s	CHIP, CHECKER
TP2404	1-535-877-22	s	CHIP, CHECKER
X400	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X401	1-814-184-11	s	OSCILLATOR, CRYSTAL
X402	1-814-185-11	s	OSCILLATOR, CRYSTAL
X403	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X404	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X405	1-813-003-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

HIF-56 BOARD (SUFFIX 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1704-158-A	s	MOUNTED CIRCUIT BOARD, HIF-56
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
10pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C101	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C102	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C103	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C106	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C107	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C108	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C109	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C137	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C140	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C142	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C147	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C201	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C203	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C204	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C206	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C207	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C212	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C213	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C214	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C215	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C216	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C217	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C222	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C223	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C224	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C225	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C228	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C229	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C232	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C233	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C248	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C249	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C252	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C253	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C256	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C257	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C258	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C259	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C260	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C261	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C262	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C263	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C264	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C265	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C266	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C267	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C268	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C271	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C275	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C276	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C279	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C280	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C281	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C282	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C283	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C284	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C285	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C286	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C287	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C288	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C289	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C290	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C291	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C292	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C293	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C296	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C297	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C304	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C319	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C320	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C321	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C322	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C325	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C326	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C332	1-116-340-11	s	CAP, ELECT 22MF 105
C333	1-116-340-11	s	CAP, ELECT 22MF 105
C334	1-116-340-11	s	CAP, ELECT 22MF 105
C335	1-116-340-11	s	CAP, ELECT 22MF 105
C336	1-116-340-11	s	CAP, ELECT 22MF 105
C337	1-116-340-11	s	CAP, ELECT 22MF 105
C338	1-116-340-11	s	CAP, ELECT 22MF 105
C339	1-116-340-11	s	CAP, ELECT 22MF 105
C340	1-116-340-11	s	CAP, ELECT 22MF 105
C341	1-116-340-11	s	CAP, ELECT 22MF 105
C342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C347	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C348	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C349	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C350	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C363	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C364	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C365	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C366	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C367	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C368	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C369	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C370	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C401	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C407	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C410	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C414	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C415	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C419	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C421	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C422	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C423	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C424	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C426	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C427	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C429	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C446	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C450	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C453	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C454	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C455	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C456	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C457	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C458	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C459	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C460	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C461	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C462	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C464	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C465	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C466	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C468	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C470	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C471	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C472	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C473	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C474	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C475	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C476	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C478	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C480	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C481	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C483	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C485	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C486	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C487	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C488	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C489	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C490	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C491	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C492	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C494	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C495	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C609	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C612	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C700	1-116-340-11	s	CAP, ELECT 22MF 105
C701	1-116-340-11	s	CAP, ELECT 22MF 105
C702	1-116-340-11	s	CAP, ELECT 22MF 105
C703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C705	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C707	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C708	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C710	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C714	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C720	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C721	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C726	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C727	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C728	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C731	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C732	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C733	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C734	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C735	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C736	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C739	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C740	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C741	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C742	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C743	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C744	1-116-340-11	s	CAP, ELECT 22MF 105
C745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C748	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C749	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C752	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C753	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C756	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C757	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C758	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C761	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C762	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C764	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C765	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C769	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C770	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C771	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C772	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C777	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C778	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C779	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C780	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C781	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C782	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C784	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C786	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C788	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C791	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C792	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C793	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C794	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C795	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C796	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C797	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C798	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C809	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C810	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C840	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C846	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C848	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C850	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C852	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C856	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C857	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C858	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C859	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C860	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C862	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C864	1-116-340-11	s	CAP, ELECT 22MF 105
C865	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C867	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1125	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1126	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1127	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1128	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1137	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1138	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1140	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1142	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1147	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1148	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1149	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1150	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1151	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1153	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1156	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1157	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1158	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1160	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1161	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1163	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1165	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1166	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1167	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1168	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1169	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1170	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1171	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1172	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1173	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1176	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1177	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1178	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1180	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1181	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1182	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1183	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1184	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1186	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1188	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1190	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1191	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1192	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1193	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1194	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1195	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1196	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1197	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1198	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1200	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1201	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1202	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1203	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1204	1-116-099-11	s	CAP, ELECT 100MF 105
C1205	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1207	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1208	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1209	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1213	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1216	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1217	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1218	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1222	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1223	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1226	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1227	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1228	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1229	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1230	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1231	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1233	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1234	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1237	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1238	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1239	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1240	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1242	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1243	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-116-340-11	s	CAP, ELECT 22MF 105
C1246	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1247	1-116-099-11	s	CAP, ELECT 100MF 105
C1300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1301	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1326	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1347	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1348	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1349	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1350	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1351	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1352	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1353	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1354	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1359	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1360	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1361	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1502	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1509	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1512	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1606	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1607	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1608	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1609	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1610	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1611	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1612	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1616	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1700	1-116-340-11	s	CAP, ELECT 22MF 105
C1701	1-116-340-11	s	CAP, ELECT 22MF 105
C1702	1-116-340-11	s	CAP, ELECT 22MF 105
C1703	1-116-340-11	s	CAP, ELECT 22MF 105
C1704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1706	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1708	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1709	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1711	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1716	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1718	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1719	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1721	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1722	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1723	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1725	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1726	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1727	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1728	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1729	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1730	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1731	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1733	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1734	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1735	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1736	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1739	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1740	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1742	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1743	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1745	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1746	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1747	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1748	1-116-340-11	s	CAP, ELECT 22MF 105
C1749	1-116-340-11	s	CAP, ELECT 22MF 105
C1750	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1751	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1753	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1754	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1755	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1756	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1757	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1758	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1759	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1762	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1763	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1764	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1766	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1767	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1769	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1770	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1772	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1773	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1775	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1779	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1780	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1782	1-116-340-11	s	CAP, ELECT 22MF 105
C1783	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1784	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1785	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1786	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1787	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1789	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1790	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1791	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1792	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1793	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1794	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1797	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1798	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1806	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1807	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1809	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1812	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1813	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1816	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1818	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1820	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1822	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1824	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1826	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1828	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1829	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1833	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1834	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1836	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1838	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1840	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1842	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1843	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1844	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1845	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1846	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1848	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1850	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1852	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1854	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1856	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1858	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1860	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1862	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1864	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1866	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1868	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1869	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1870	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1871	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1900	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1901	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1902	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1903	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1904	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1905	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1906	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1907	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1908	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1909	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2000	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2001	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2002	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2003	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2004	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2005	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2006	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2007	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2008	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2009	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2024	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2026	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2028	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2030	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2031	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2032	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2033	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2034	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2035	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2036	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2037	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2041	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2044	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2045	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2046	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2047	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2050	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2051	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2053	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2054	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2055	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2056	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2058	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2059	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2060	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2061	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2062	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2063	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2064	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2071	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2072	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2073	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2074	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2075	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2076	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2077	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2078	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2079	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2080	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2081	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2082	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2083	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2084	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2085	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2086	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2087	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2088	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2089	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2090	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2091	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2092	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2093	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2094	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2095	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2096	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2097	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2098	1-116-099-11	s	CAP, ELECT 100MF 105
C2100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2106	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2108	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2112	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2115	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2121	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2127	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2128	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2132	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2133	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2134	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2135	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2136	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2137	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2138	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2139	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2140	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2141	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2142	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2143	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2144	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2145	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2146	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2147	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2148	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2149	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2150	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2151	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2152	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2153	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2154	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2155	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2156	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2157	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2158	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2159	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2160	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2161	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2162	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2163	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2164	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2165	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2166	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2167	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2168	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2169	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2170	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2171	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2172	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2173	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2174	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2175	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2176	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2177	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2178	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2179	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2180	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2181	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2182	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2183	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2184	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2185	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2186	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2187	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2188	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2189	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2190	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2191	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2192	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2193	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2194	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2195	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2196	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2197	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2198	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2199	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2212	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2213	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2214	1-116-099-11	s	CAP, ELECT 100MF 105
C2215	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C2216	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C2217	1-116-099-11	s	CAP, ELECT 100MF 105
C2218	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2219	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2220	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2221	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2222	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2223	1-164-849-81	s	CAP, CHIP CERAMIC 9PF CH 1005
C2224	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2225	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2226	1-164-938-81	s	CAP, CHIPCERAMIC 1500PF B 1005
C2227	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C2228	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2229	1-164-844-81	s	CAP, CHIP CERAMIC 4PF CH 1005
C2232	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2233	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2234	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2235	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2236	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C2238	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2239	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2240	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2241	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2242	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2243	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2244	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2245	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2246	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2247	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2248	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2249	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2250	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2251	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2256	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2257	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2258	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2259	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2260	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2261	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2262	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2263	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2264	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2265	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2266	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2267	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2268	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2269	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2270	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2271	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2272	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2273	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2274	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2275	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2276	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2277	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2278	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2310	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2319	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2320	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2321	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2322	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2323	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2324	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2325	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2327	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2328	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2329	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2330	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2331	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2332	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2333	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2334	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2335	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2336	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2337	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2338	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2339	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2340	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2341	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2342	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2343	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2344	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2345	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2346	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2424	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2439	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2444	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2445	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2446	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2447	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2448	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2454	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2501	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2502	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2503	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2506	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2508	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2509	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2510	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2511	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2513	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2514	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C2515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2516	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2518	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2519	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2520	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2522	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2526	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2528	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2530	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2532	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2533	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2601	1-116-116-11	s	CAP, ELECT 220MF 105
C2602	1-116-116-11	s	CAP, ELECT 220MF 105
C2603	1-116-118-11	s	CAP, ELECT 47MF 105
C2604	1-116-118-11	s	CAP, ELECT 47MF 105
C2606	1-116-116-11	s	CAP, ELECT 220MF 105
C2607	1-116-099-11	s	CAP, ELECT 100MF 105
C2608	1-116-099-11	s	CAP, ELECT 100MF 105
C2609	1-116-116-11	s	CAP, ELECT 220MF 105
C2610	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2611	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2613	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2614	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2615	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2617	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2618	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2627	1-116-118-11	s	CAP, ELECT 47MF 105
C2628	1-116-118-11	s	CAP, ELECT 47MF 105
C2629	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2630	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2632	1-116-118-11	s	CAP, ELECT 47MF 105
C2633	1-116-118-11	s	CAP, ELECT 47MF 105
C2675	1-116-099-11	s	CAP, ELECT 100MF 105
C2676	1-116-099-11	s	CAP, ELECT 100MF 105
C2677	1-116-118-11	s	CAP, ELECT 47MF 105
C2678	1-116-118-11	s	CAP, ELECT 47MF 105
C2679	1-116-099-11	s	CAP, ELECT 100MF 105
C2680	1-116-099-11	s	CAP, ELECT 100MF 105
C2681	1-116-118-11	s	CAP, ELECT 47MF 105
C2682	1-116-099-11	s	CAP, ELECT 100MF 105
C2683	1-116-099-11	s	CAP, ELECT 100MF 105
C2684	1-116-099-11	s	CAP, ELECT 100MF 105
C2685	1-116-099-11	s	CAP, ELECT 100MF 105
C2686	1-116-099-11	s	CAP, ELECT 100MF 105
C2687	1-116-099-11	s	CAP, ELECT 100MF 105
C2688	1-116-099-11	s	CAP, ELECT 100MF 105
C2689	1-116-100-11	s	CAP, ELECT 220MF 105
C2690	1-116-100-11	s	CAP, ELECT 220MF 105
C2691	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2692	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2693	1-116-099-11	s	CAP, ELECT 100MF 105
C2694	1-116-099-11	s	CAP, ELECT 100MF 105
C2695	1-116-099-11	s	CAP, ELECT 100MF 105
C2696	1-116-099-11	s	CAP, ELECT 100MF 105
C2699	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2700	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2701	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2710	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2800	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2801	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2802	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2803	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2805	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2806	1-116-099-11	s	CAP, ELECT 100MF 105
C2807	1-116-099-11	s	CAP, ELECT 100MF 105
C2808	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2809	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C2810	1-116-099-11	s	CAP, ELECT 100MF 105
C2811	1-116-099-11	s	CAP, ELECT 100MF 105
C2812	1-116-099-11	s	CAP, ELECT 100MF 105
C2813	1-116-099-11	s	CAP, ELECT 100MF 105
C2814	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2815	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2816	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2817	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2818	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C2819	1-164-940-81	s	CAP,CHIP CERAMIC 3300PF B 1005
C2820	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2822	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2824	1-116-118-11	s	CAP, ELECT 47MF 105
C2825	1-116-118-11	s	CAP, ELECT 47MF 105
C2826	1-116-099-11	s	CAP, ELECT 100MF 105
C2827	1-116-099-11	s	CAP, ELECT 100MF 105
C2828	1-116-099-11	s	CAP, ELECT 100MF 105
C2829	1-116-100-11	s	CAP, ELECT 220MF 105
C2830	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2832	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2833	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2836	1-116-099-11	s	CAP, ELECT 100MF 105
C2837	1-116-099-11	s	CAP, ELECT 100MF 105
C2838	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2839	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2840	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2841	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2842	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2843	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2844	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2845	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2846	1-116-118-11	s	CAP, ELECT 47MF 105
C2847	1-116-099-11	s	CAP, ELECT 100MF 105
C2848	1-116-099-11	s	CAP, ELECT 100MF 105
C2850	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2851	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2852	1-116-099-11	s	CAP, ELECT 100MF 105
C2867	1-116-118-11	s	CAP, ELECT 47MF 105
C2868	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2869	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2870	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C2871	1-116-099-11	s	CAP, ELECT 100MF 105
C2872	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3100	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3103	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3104	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3105	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3106	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3111	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3114	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3115	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3118	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3119	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3121	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
C3401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3402	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3405	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3411	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3412	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3413	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3414	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3415	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3416	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3417	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3418	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3419	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3420	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3421	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3422	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3423	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3424	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3432	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3433	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3434	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3435	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3436	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3437	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3438	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3472	1-164-942-81	s	CAP,CHIP CERAMIC 6800PF B 1005
C3473	1-164-876-81	s	CAP,CHIP CERAMIC 120PF CH 1005
C3478	1-116-340-11	s	CAP, ELECT 22MF 105
C3479	1-116-340-11	s	CAP, ELECT 22MF 105
CN200	1-778-762-12	s	CONNECTOR, COAXIAL
CN201	1-778-762-12	s	CONNECTOR, COAXIAL
CN202	1-778-762-12	s	CONNECTOR, COAXIAL
CN203	1-778-762-12	s	CONNECTOR, COAXIAL
CN204	1-778-762-12	s	CONNECTOR, COAXIAL
CN205	1-778-762-12	s	CONNECTOR, COAXIAL
CN206	1-778-762-12	s	CONNECTOR, COAXIAL
CN207	1-778-762-12	s	CONNECTOR, COAXIAL
CN208	1-778-762-12	s	CONNECTOR, COAXIAL
CN209	1-778-762-12	s	CONNECTOR, COAXIAL
CN210	1-764-243-31	o	CONNECTOR (COAXIAL)
CN211	1-764-243-31	o	CONNECTOR (COAXIAL)
CN213	1-764-243-31	o	CONNECTOR (COAXIAL)
CN2401	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D501	8-719-077-09	s	DIODE CL-196HR-CD-T
D502	8-719-077-09	s	DIODE CL-196HR-CD-T
D503	8-719-074-31	s	DIODE CL-196YG-CD-T
D504	8-719-074-31	s	DIODE CL-196YG-CD-T
D900	8-719-074-31	s	DIODE CL-196YG-CD-T
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-077-09	s	DIODE CL-196HR-CD-T

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
D903	8-719-077-09	s	DIODE CL-196HR-CD-T
D1400	8-719-074-31	s	DIODE CL-196YG-CD-T
D1401	8-719-074-31	s	DIODE CL-196YG-CD-T
D1402	8-719-077-09	s	DIODE CL-196HR-CD-T
D1403	8-719-077-09	s	DIODE CL-196HR-CD-T
D1900	8-719-074-31	s	DIODE CL-196YG-CD-T
D1901	8-719-074-31	s	DIODE CL-196YG-CD-T
D1902	8-719-077-09	s	DIODE CL-196HR-CD-T
D1903	8-719-077-09	s	DIODE CL-196HR-CD-T
D2200	8-719-941-21	s	DIODE DAP202UT106
D2600	8-719-072-43	s	DIODE RB050L-40TE25
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E17	1-535-877-22	s	CHIP, CHECKER
E18	1-535-877-22	s	CHIP, CHECKER
F2601	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
F2602	⚠ 1-533-804-21	s	FUSE (SMD) (2.5A/125V)
F2603	⚠ 1-533-626-21	s	FUSE (SMD) (1.25A/125V)
F2604	⚠ 1-576-270-21	s	FUSE (SMD) (4A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB204	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB205	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB206	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB207	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB208	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB209	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB210	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB211	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB212	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB213	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB214	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB215	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB406	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
FB407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB409	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB410	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB709	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1706	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1707	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1708	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1710	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1711	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2000	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2001	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2002	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2500	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2622	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2623	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2624	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2625	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2626	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FL2200	1-234-040-23	s	FILTER, LOW PASS
FL2201	1-234-040-23	s	FILTER, LOW PASS
IC100	8-759-573-97	s	IC SN74LVC541APWR
IC101	6-702-547-11	s	IC SN65LVDS2DR
IC102	6-702-547-11	s	IC SN65LVDS2DR
IC103	6-701-990-01	s	IC SN74LVC257APWR
IC104	8-759-694-36	s	IC SN74CBTLV3257PWR
IC105	6-700-804-01	s	IC SN74LVC574APWR
IC106	6-708-277-01	s	IC CDCVF25081PWR

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC107	8-759-573-97	s	IC SN74LVC541APWR
IC108	8-759-573-97	s	IC SN74LVC541APWR
IC109	6-708-277-01	s	IC CDCVF25081PWR
IC110	8-759-573-97	s	IC SN74LVC541APWR
IC111	6-700-804-01	s	IC SN74LVC574APWR
IC112	8-759-639-86	s	IC SN65LVDS32DR
IC113	8-759-639-86	s	IC SN65LVDS32DR
IC114	8-759-639-86	s	IC SN65LVDS32DR
IC115	8-759-573-97	s	IC SN74LVC541APWR
IC116	6-702-547-11	s	IC SN65LVDS2DR
IC117	8-759-683-80	s	IC SN65LVDS1DBVR
IC213	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC214	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC215	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC216	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC217	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC218	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC219	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC220	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC221	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC222	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC401	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC402	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC404	6-707-895-01	s	IC MC100EPT22DTR2
IC406	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC407	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC408	6-706-682-01	s	IC MC100LVELT22DR2
IC410	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC411	8-759-683-80	s	IC SN65LVDS1DBVR
IC412	6-714-109-01	s	IC LMK03000CISQ
IC414	8-759-683-80	s	IC SN65LVDS1DBVR
IC1200	6-700-764-01	s	IC DS90CR288AMTDX
IC1201	6-700-651-01	s	IC DS90CR483VJDX
IC1300	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1301	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1302	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1303	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1304	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1305	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC1500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1503	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC1504	8-759-573-97	s	IC SN74LVC541APWR
IC1505	8-759-573-97	s	IC SN74LVC541APWR
IC2101	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC2103	8-759-656-54	s	IC TC7WH14FK(TE85R)
IC2105	6-714-202-01	s	IC MT46V16M16P-6TIT:K
IC2200	6-701-079-01	s	IC ADV7300AKST
IC2201	6-701-079-01	s	IC ADV7300AKST
IC2202	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2203	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC2204	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2205	8-759-381-54	s	IC UPC812G2-E2
IC2206	8-759-381-54	s	IC UPC812G2-E2
IC2207	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2208	6-703-188-01	s	IC S-80827CNNB-B8MT2G
IC2209	8-752-068-24	s	IC CXA1450M-TH
IC2210	8-759-255-83	s	IC LT1227CS8-E2

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC2211	8-759-255-83	s	IC LT1227CS8-E2
IC2212	6-700-804-01	s	IC SN74LVC574APWR
IC2213	6-700-804-01	s	IC SN74LVC574APWR
IC2214	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2215	6-706-478-01	s	IC TC7SET08FU(T5RSOJF)
IC2216	8-759-683-80	s	IC SN65LVDS1DBVR
IC2217	8-759-675-54	s	IC TC7W53FK(TE85R)
IC2218	8-759-669-45	s	IC TL062CPWR-12
IC2219	8-759-669-45	s	IC TL062CPWR-12
IC2221	8-759-672-76	s	IC AK9813BF-E2
IC2303	6-714-365-01	s	IC MX29LV640EBTI-70G
IC2304	6-714-365-01	s	IC MX29LV640EBTI-70G
IC2401	8-759-679-55	s	IC SN74LVC08APWR
IC2402	8-759-573-97	s	IC SN74LVC541APWR
IC2403	8-759-573-97	s	IC SN74LVC541APWR
IC2404	8-759-573-97	s	IC SN74LVC541APWR
IC2405	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2406	8-759-392-77	s	IC SN74LVC245APWR
IC2407	8-759-392-77	s	IC SN74LVC245APWR
IC2408	6-708-277-01	s	IC CDCVF25081PWR
IC2409	8-759-573-97	s	IC SN74LVC541APWR
IC2410	8-759-392-77	s	IC SN74LVC245APWR
IC2411	8-759-392-77	s	IC SN74LVC245APWR
IC2412	8-759-573-97	s	IC SN74LVC541APWR
IC2413	8-759-573-97	s	IC SN74LVC541APWR
IC2414	8-759-573-97	s	IC SN74LVC541APWR
IC2415	6-701-990-01	s	IC SN74LVC257APWR
IC2417	8-759-549-20	s	IC SN74LV541APWR
IC2418	8-759-549-20	s	IC SN74LV541APWR
IC2419	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2420	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2421	6-710-605-01	s	IC MAX1617AMEE+TG069
IC2423	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2500	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2501	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2502	8-759-539-53	s	IC MB90096PF-G-139-BND-ER
IC2503	8-759-392-65	s	IC AD828ARZ-REEL
IC2505	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC2506	6-701-990-01	s	IC SN74LVC257APWR
IC2507	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC2508	8-759-573-97	s	IC SN74LVC541APWR
IC2509	8-759-392-77	s	IC SN74LVC245APWR
IC2510	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC2511	8-759-573-97	s	IC SN74LVC541APWR
IC2512	6-701-990-01	s	IC SN74LVC257APWR
IC2513	6-701-990-01	s	IC SN74LVC257APWR
IC2514	8-759-669-41	s	IC SN74LVC125APWR-12
IC2515	6-701-990-01	s	IC SN74LVC257APWR
IC2516	8-759-679-55	s	IC SN74LVC08APWR
IC2600	8-759-460-74	s	IC BA05FP-E2
IC2601	8-759-662-86	s	IC NJM79M05DL1A(TE2)
IC2602	6-701-572-01	s	IC TPS54610PWPR
IC2603	6-701-572-01	s	IC TPS54610PWPR
IC2604	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2605	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2606	6-700-655-01	s	IC LT1963ES8#TR
IC2607	6-700-655-01	s	IC LT1963ES8#TR
IC2608	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2609	6-707-035-01	s	IC LP2996MRX

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC2610	6-707-035-01	s	IC LP2996MRX
IC2611	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2612	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC2613	6-700-655-01	s	IC LT1963ES8#TR
IC2614	6-707-035-01	s	IC LP2996MRX
IC2615	6-709-013-01	s	IC UPC2925BT-E2-AZ
IC2616	6-708-683-01	s	IC MP1583 DN-LF
L200	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L201	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L208	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L209	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L210	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L211	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L216	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L217	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L218	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L219	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L223	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L224	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L226	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L227	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L228	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L229	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L237	1-414-837-21	s	INDUCTOR, CHIP 5.6NH (1005)
L240	1-414-838-21	s	INDUCTOR, CHIP 6.8NH (1005)
L2100	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2101	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L2200	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2201	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2202	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2203	1-412-969-41	s	INDUCTOR, SMALL TYPE 0.15UH
L2204	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2205	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2206	1-414-404-41	s	INDUCTOR (SMD) 100.0UH
L2500	1-412-957-21	s	INDUCTOR, SMALL TYPE 33UH 2520
L2601	1-419-491-21	s	COIL, CHOKE 10UH
L2602	1-419-491-21	s	COIL, CHOKE 10UH
L2604	1-419-491-21	s	COIL, CHOKE 10UH
L2609	1-419-630-21	s	COIL, CHOKE 4.7UH
L2610	1-419-630-21	s	COIL, CHOKE 4.7UH
L2620	1-419-630-21	s	COIL, CHOKE 4.7UH
L2621	1-419-630-21	s	COIL, CHOKE 4.7UH
L2622	1-419-630-21	s	COIL, CHOKE 4.7UH
L2623	1-419-630-21	s	COIL, CHOKE 4.7UH
L2624	1-419-630-21	s	COIL, CHOKE 4.7UH
L2625	1-419-630-21	s	COIL, CHOKE 4.7UH
L2627	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L2628	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L2629	1-419-491-21	s	COIL, CHOKE 10UH
Q400	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q401	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q402	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q403	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q404	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q405	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2200	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q2201	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R10	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R100	1-208-855-81	s	RES, CHIP 47 (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-855-81	s	RES, CHIP 47 (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R105	1-208-911-81	s	RES, CHIP 10K (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-911-81	s	RES, CHIP 10K (1005)
R109	1-208-911-81	s	RES, CHIP 10K (1005)
R110	1-208-855-81	s	RES, CHIP 47 (1005)
R111	1-208-855-81	s	RES, CHIP 47 (1005)
R112	1-208-855-81	s	RES, CHIP 47 (1005)
R113	1-208-855-81	s	RES, CHIP 47 (1005)
R114	1-208-855-81	s	RES, CHIP 47 (1005)
R115	1-208-855-81	s	RES, CHIP 47 (1005)
R116	1-220-870-81	s	RES, CHIP 10 (1005)
R117	1-220-870-81	s	RES, CHIP 10 (1005)
R118	1-208-855-81	s	RES, CHIP 47 (1005)
R119	1-208-855-81	s	RES, CHIP 47 (1005)
R120	1-208-855-81	s	RES, CHIP 47 (1005)
R121	1-208-855-81	s	RES, CHIP 47 (1005)
R122	1-208-855-81	s	RES, CHIP 47 (1005)
R123	1-208-855-81	s	RES, CHIP 47 (1005)
R124	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-208-887-81	s	RES, CHIP 1.0K (1005)
R127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R128	1-220-878-81	s	RES, CHIP 22 (1005)
R129	1-220-878-81	s	RES, CHIP 22 (1005)
R130	1-220-878-81	s	RES, CHIP 22 (1005)
R131	1-220-878-81	s	RES, CHIP 22 (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R134	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-220-878-81	s	RES, CHIP 22 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R136	1-208-911-81	s	RES, CHIP 10K (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-208-855-81	s	RES, CHIP 47 (1005)
R139	1-208-855-81	s	RES, CHIP 47 (1005)
R140	1-208-855-81	s	RES, CHIP 47 (1005)
R141	1-208-855-81	s	RES, CHIP 47 (1005)
R142	1-208-855-81	s	RES, CHIP 47 (1005)
R143	1-208-855-81	s	RES, CHIP 47 (1005)
R144	1-220-878-81	s	RES, CHIP 22 (1005)
R145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-208-855-81	s	RES, CHIP 47 (1005)
R150	1-208-855-81	s	RES, CHIP 47 (1005)
R151	1-208-855-81	s	RES, CHIP 47 (1005)
R152	1-220-878-81	s	RES, CHIP 22 (1005)
R153	1-220-878-81	s	RES, CHIP 22 (1005)
R154	1-220-878-81	s	RES, CHIP 22 (1005)
R155	1-220-878-81	s	RES, CHIP 22 (1005)
R156	1-220-878-81	s	RES, CHIP 22 (1005)
R157	1-220-878-81	s	RES, CHIP 22 (1005)
R158	1-220-878-81	s	RES, CHIP 22 (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R162	1-208-855-81	s	RES, CHIP 47 (1005)
R163	1-208-855-81	s	RES, CHIP 47 (1005)
R164	1-208-855-81	s	RES, CHIP 47 (1005)
R165	1-208-855-81	s	RES, CHIP 47 (1005)
R166	1-208-855-81	s	RES, CHIP 47 (1005)
R167	1-208-855-81	s	RES, CHIP 47 (1005)
R168	1-208-855-81	s	RES, CHIP 47 (1005)
R169	1-208-855-81	s	RES, CHIP 47 (1005)
R170	1-208-855-81	s	RES, CHIP 47 (1005)
R171	1-208-855-81	s	RES, CHIP 47 (1005)
R172	1-208-855-81	s	RES, CHIP 47 (1005)
R173	1-208-855-81	s	RES, CHIP 47 (1005)
R174	1-208-855-81	s	RES, CHIP 47 (1005)
R175	1-208-855-81	s	RES, CHIP 47 (1005)
R176	1-208-855-81	s	RES, CHIP 47 (1005)
R177	1-208-855-81	s	RES, CHIP 47 (1005)
R178	1-208-855-81	s	RES, CHIP 47 (1005)
R179	1-208-855-81	s	RES, CHIP 47 (1005)
R180	1-208-855-81	s	RES, CHIP 47 (1005)
R181	1-208-855-81	s	RES, CHIP 47 (1005)
R182	1-208-855-81	s	RES, CHIP 47 (1005)
R183	1-208-855-81	s	RES, CHIP 47 (1005)
R184	1-220-870-81	s	RES, CHIP 10 (1005)
R185	1-220-870-81	s	RES, CHIP 10 (1005)
R186	1-220-870-81	s	RES, CHIP 10 (1005)
R187	1-220-870-81	s	RES, CHIP 10 (1005)
R188	1-220-870-81	s	RES, CHIP 10 (1005)
R189	1-220-870-81	s	RES, CHIP 10 (1005)
R190	1-220-870-81	s	RES, CHIP 10 (1005)
R191	1-220-870-81	s	RES, CHIP 10 (1005)
R192	1-220-870-81	s	RES, CHIP 10 (1005)
R193	1-220-870-81	s	RES, CHIP 10 (1005)
R194	1-220-870-81	s	RES, CHIP 10 (1005)
R195	1-208-911-81	s	RES, CHIP 10K (1005)
R205	1-208-855-81	s	RES, CHIP 47 (1005)
R207	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R208	1-208-860-81	s	RES, CHIP 75 (1005)
R209	1-208-860-81	s	RES, CHIP 75 (1005)
R210	1-220-884-81	s	RES, CHIP 39 (1005)
R212	1-220-884-81	s	RES, CHIP 39 (1005)
R214	1-208-863-81	s	RES, CHIP 100 (1005)
R218	1-208-863-81	s	RES, CHIP 100 (1005)
R222	1-208-875-81	s	RES, CHIP 330 (1005)
R223	1-208-875-81	s	RES, CHIP 330 (1005)
R224	1-208-875-81	s	RES, CHIP 330 (1005)
R225	1-208-875-81	s	RES, CHIP 330 (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R227	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R228	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R232	1-220-878-81	s	RES, CHIP 22 (1005)
R233	1-220-878-81	s	RES, CHIP 22 (1005)
R234	1-220-878-81	s	RES, CHIP 22 (1005)
R235	1-220-878-81	s	RES, CHIP 22 (1005)
R240	1-208-855-81	s	RES, CHIP 47 (1005)
R244	1-208-855-81	s	RES, CHIP 47 (1005)
R245	1-208-855-81	s	RES, CHIP 47 (1005)
R249	1-208-855-81	s	RES, CHIP 47 (1005)
R254	1-208-881-81	s	RES, CHIP 560 (1005)
R256	1-208-881-81	s	RES, CHIP 560 (1005)
R258	1-208-860-81	s	RES, CHIP 75 (1005)
R260	1-208-860-81	s	RES, CHIP 75 (1005)
R261	1-208-860-81	s	RES, CHIP 75 (1005)
R264	1-208-860-81	s	RES, CHIP 75 (1005)
R266	1-208-863-81	s	RES, CHIP 100 (1005)
R267	1-208-863-81	s	RES, CHIP 100 (1005)
R270	1-208-863-81	s	RES, CHIP 100 (1005)
R271	1-208-863-81	s	RES, CHIP 100 (1005)
R282	1-220-878-81	s	RES, CHIP 22 (1005)
R283	1-220-878-81	s	RES, CHIP 22 (1005)
R284	1-220-878-81	s	RES, CHIP 22 (1005)
R285	1-220-878-81	s	RES, CHIP 22 (1005)
R286	1-220-878-81	s	RES, CHIP 22 (1005)
R287	1-220-878-81	s	RES, CHIP 22 (1005)
R288	1-220-878-81	s	RES, CHIP 22 (1005)
R289	1-220-878-81	s	RES, CHIP 22 (1005)
R292	1-208-855-81	s	RES, CHIP 47 (1005)
R295	1-208-855-81	s	RES, CHIP 47 (1005)
R296	1-208-855-81	s	RES, CHIP 47 (1005)
R297	1-208-855-81	s	RES, CHIP 47 (1005)
R298	1-208-855-81	s	RES, CHIP 47 (1005)
R299	1-208-855-81	s	RES, CHIP 47 (1005)
R301	1-208-855-81	s	RES, CHIP 47 (1005)
R305	1-208-855-81	s	RES, CHIP 47 (1005)
R306	1-208-881-81	s	RES, CHIP 560 (1005)
R307	1-208-881-81	s	RES, CHIP 560 (1005)
R308	1-208-881-81	s	RES, CHIP 560 (1005)
R309	1-208-881-81	s	RES, CHIP 560 (1005)
R310	1-208-860-81	s	RES, CHIP 75 (1005)
R311	1-208-860-81	s	RES, CHIP 75 (1005)
R312	1-208-860-81	s	RES, CHIP 75 (1005)
R313	1-208-860-81	s	RES, CHIP 75 (1005)
R314	1-208-860-81	s	RES, CHIP 75 (1005)
R315	1-208-860-81	s	RES, CHIP 75 (1005)
R316	1-208-860-81	s	RES, CHIP 75 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R317	1-208-860-81	s	RES, CHIP 75 (1005)
R318	1-208-863-81	s	RES, CHIP 100 (1005)
R320	1-208-863-81	s	RES, CHIP 100 (1005)
R322	1-208-863-81	s	RES, CHIP 100 (1005)
R324	1-208-863-81	s	RES, CHIP 100 (1005)
R325	1-208-863-81	s	RES, CHIP 100 (1005)
R330	1-208-860-81	s	RES, CHIP 75 (1005)
R331	1-208-860-81	s	RES, CHIP 75 (1005)
R332	1-208-860-81	s	RES, CHIP 75 (1005)
R333	1-208-860-81	s	RES, CHIP 75 (1005)
R334	1-220-878-81	s	RES, CHIP 22 (1005)
R335	1-220-878-81	s	RES, CHIP 22 (1005)
R338	1-220-878-81	s	RES, CHIP 22 (1005)
R339	1-220-878-81	s	RES, CHIP 22 (1005)
R347	1-208-855-81	s	RES, CHIP 47 (1005)
R349	1-208-855-81	s	RES, CHIP 47 (1005)
R350	1-208-855-81	s	RES, CHIP 47 (1005)
R354	1-208-855-81	s	RES, CHIP 47 (1005)
R358	1-208-883-81	s	RES, CHIP 680 (1005)
R359	1-208-883-81	s	RES, CHIP 680 (1005)
R361	1-208-860-81	s	RES, CHIP 75 (1005)
R362	1-208-860-81	s	RES, CHIP 75 (1005)
R363	1-208-860-81	s	RES, CHIP 75 (1005)
R365	1-208-860-81	s	RES, CHIP 75 (1005)
R367	1-208-871-81	s	RES, CHIP 220 (1005)
R368	1-208-871-81	s	RES, CHIP 220 (1005)
R369	1-208-871-81	s	RES, CHIP 220 (1005)
R370	1-208-871-81	s	RES, CHIP 220 (1005)
R373	1-208-911-81	s	RES, CHIP 10K (1005)
R374	1-208-911-81	s	RES, CHIP 10K (1005)
R376	1-208-911-81	s	RES, CHIP 10K (1005)
R377	1-208-860-81	s	RES, CHIP 75 (1005)
R379	1-208-889-81	s	RES, CHIP 1.2K (1005)
R380	1-208-895-81	s	RES, CHIP 2.2K (1005)
R381	1-208-887-81	s	RES, CHIP 1.0K (1005)
R383	1-208-889-81	s	RES, CHIP 1.2K (1005)
R384	1-208-895-81	s	RES, CHIP 2.2K (1005)
R385	1-208-887-81	s	RES, CHIP 1.0K (1005)
R401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R403	1-208-867-81	s	RES, CHIP 150 (1005)
R404	1-208-861-81	s	RES, CHIP 82 (1005)
R405	1-208-867-81	s	RES, CHIP 150 (1005)
R406	1-208-861-81	s	RES, CHIP 82 (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-903-81	s	RES, CHIP 4.7K (1005)
R409	1-208-869-81	s	RES, CHIP 180 (1005)
R410	1-208-911-81	s	RES, CHIP 10K (1005)
R411	1-208-911-81	s	RES, CHIP 10K (1005)
R412	1-208-911-81	s	RES, CHIP 10K (1005)
R413	1-208-863-81	s	RES, CHIP 100 (1005)
R414	1-208-863-81	s	RES, CHIP 100 (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R416	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)
R423	1-220-878-81	s	RES, CHIP 22 (1005)
R424	1-208-887-81	s	RES, CHIP 1.0K (1005)
R430	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R432	1-208-867-81	s	RES, CHIP 150 (1005)
R433	1-208-861-81	s	RES, CHIP 82 (1005)
R434	1-208-867-81	s	RES, CHIP 150 (1005)
R435	1-208-861-81	s	RES, CHIP 82 (1005)
R436	1-208-911-81	s	RES, CHIP 10K (1005)
R437	1-208-903-81	s	RES, CHIP 4.7K (1005)
R438	1-208-869-81	s	RES, CHIP 180 (1005)
R439	1-208-911-81	s	RES, CHIP 10K (1005)
R440	1-208-911-81	s	RES, CHIP 10K (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-208-863-81	s	RES, CHIP 100 (1005)
R458	1-208-885-81	s	RES, CHIP 820 (1005)
R463	1-208-911-81	s	RES, CHIP 10K (1005)
R465	1-208-863-81	s	RES, CHIP 100 (1005)
R467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R484	1-208-875-81	s	RES, CHIP 330 (1005)
R485	1-208-875-81	s	RES, CHIP 330 (1005)
R486	1-208-875-81	s	RES, CHIP 330 (1005)
R487	1-208-875-81	s	RES, CHIP 330 (1005)
R490	1-208-875-81	s	RES, CHIP 330 (1005)
R491	1-208-875-81	s	RES, CHIP 330 (1005)
R501	1-208-863-81	s	RES, CHIP 100 (1005)
R502	1-208-863-81	s	RES, CHIP 100 (1005)
R503	1-208-863-81	s	RES, CHIP 100 (1005)
R504	1-208-863-81	s	RES, CHIP 100 (1005)
R505	1-208-871-81	s	RES, CHIP 220 (1005)
R506	1-208-871-81	s	RES, CHIP 220 (1005)
R507	1-208-871-81	s	RES, CHIP 220 (1005)
R508	1-208-871-81	s	RES, CHIP 220 (1005)
R509	1-208-911-81	s	RES, CHIP 10K (1005)
R512	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R514	1-208-855-81	s	RES, CHIP 47 (1005)
R515	1-208-855-81	s	RES, CHIP 47 (1005)
R516	1-208-855-81	s	RES, CHIP 47 (1005)
R517	1-208-855-81	s	RES, CHIP 47 (1005)
R518	1-208-855-81	s	RES, CHIP 47 (1005)
R519	1-220-878-81	s	RES, CHIP 22 (1005)
R521	1-208-911-81	s	RES, CHIP 10K (1005)
R530	1-208-855-81	s	RES, CHIP 47 (1005)
R531	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R607	1-208-911-81	s	RES, CHIP 10K (1005)
R608	1-208-911-81	s	RES, CHIP 10K (1005)
R609	1-208-911-81	s	RES, CHIP 10K (1005)
R610	1-208-911-81	s	RES, CHIP 10K (1005)
R611	1-208-911-81	s	RES, CHIP 10K (1005)
R612	1-208-911-81	s	RES, CHIP 10K (1005)
R613	1-208-911-81	s	RES, CHIP 10K (1005)
R614	1-208-911-81	s	RES, CHIP 10K (1005)
R617	1-208-911-81	s	RES, CHIP 10K (1005)
R618	1-208-911-81	s	RES, CHIP 10K (1005)
R619	1-208-863-81	s	RES, CHIP 100 (1005)
R620	1-208-863-81	s	RES, CHIP 100 (1005)
R621	1-208-911-81	s	RES, CHIP 10K (1005)
R622	1-208-911-81	s	RES, CHIP 10K (1005)
R623	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R624	1-208-911-81	s	RES, CHIP 10K (1005)
R625	1-208-911-81	s	RES, CHIP 10K (1005)
R626	1-208-911-81	s	RES, CHIP 10K (1005)
R627	1-208-911-81	s	RES, CHIP 10K (1005)
R628	1-208-911-81	s	RES, CHIP 10K (1005)
R629	1-208-894-81	s	RES, CHIP 2.0K (1005)
R630	1-208-894-81	s	RES, CHIP 2.0K (1005)
R631	1-208-894-81	s	RES, CHIP 2.0K (1005)
R632	1-208-911-81	s	RES, CHIP 10K (1005)
R635	1-208-911-81	s	RES, CHIP 10K (1005)
R636	1-208-911-81	s	RES, CHIP 10K (1005)
R637	1-208-911-81	s	RES, CHIP 10K (1005)
R638	1-208-911-81	s	RES, CHIP 10K (1005)
R639	1-208-911-81	s	RES, CHIP 10K (1005)
R640	1-208-911-81	s	RES, CHIP 10K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-911-81	s	RES, CHIP 10K (1005)
R643	1-208-911-81	s	RES, CHIP 10K (1005)
R644	1-208-911-81	s	RES, CHIP 10K (1005)
R645	1-208-911-81	s	RES, CHIP 10K (1005)
R646	1-208-911-81	s	RES, CHIP 10K (1005)
R647	1-208-911-81	s	RES, CHIP 10K (1005)
R648	1-208-911-81	s	RES, CHIP 10K (1005)
R649	1-208-911-81	s	RES, CHIP 10K (1005)
R650	1-208-911-81	s	RES, CHIP 10K (1005)
R651	1-208-911-81	s	RES, CHIP 10K (1005)
R652	1-208-911-81	s	RES, CHIP 10K (1005)
R653	1-208-911-81	s	RES, CHIP 10K (1005)
R654	1-208-911-81	s	RES, CHIP 10K (1005)
R655	1-208-911-81	s	RES, CHIP 10K (1005)
R656	1-208-911-81	s	RES, CHIP 10K (1005)
R657	1-208-911-81	s	RES, CHIP 10K (1005)
R658	1-208-911-81	s	RES, CHIP 10K (1005)
R659	1-208-911-81	s	RES, CHIP 10K (1005)
R660	1-208-911-81	s	RES, CHIP 10K (1005)
R661	1-208-911-81	s	RES, CHIP 10K (1005)
R662	1-208-911-81	s	RES, CHIP 10K (1005)
R663	1-208-911-81	s	RES, CHIP 10K (1005)
R664	1-208-911-81	s	RES, CHIP 10K (1005)
R665	1-208-911-81	s	RES, CHIP 10K (1005)
R666	1-208-911-81	s	RES, CHIP 10K (1005)
R667	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R668	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R670	1-208-911-81	s	RES, CHIP 10K (1005)
R671	1-208-911-81	s	RES, CHIP 10K (1005)
R672	1-208-911-81	s	RES, CHIP 10K (1005)
R674	1-208-887-81	s	RES, CHIP 1.0K (1005)
R676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R677	1-208-911-81	s	RES, CHIP 10K (1005)
R678	1-208-911-81	s	RES, CHIP 10K (1005)
R679	1-208-863-81	s	RES, CHIP 100 (1005)
R681	1-208-887-81	s	RES, CHIP 1.0K (1005)
R682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R683	1-208-855-81	s	RES, CHIP 47 (1005)
R684	1-208-855-81	s	RES, CHIP 47 (1005)
R685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R687	1-208-887-81	s	RES, CHIP 1.0K (1005)
R688	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R691	1-208-887-81	s	RES, CHIP 1.0K (1005)
R692	1-208-887-81	s	RES, CHIP 1.0K (1005)
R693	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R694	1-208-887-81	s	RES, CHIP 1.0K (1005)
R695	1-208-855-81	s	RES, CHIP 47 (1005)
R696	1-208-855-81	s	RES, CHIP 47 (1005)
R697	1-208-887-81	s	RES, CHIP 1.0K (1005)
R698	1-208-887-81	s	RES, CHIP 1.0K (1005)
R699	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R700	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R701	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R702	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R703	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R706	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-208-911-81	s	RES, CHIP 10K (1005)
R715	1-208-887-81	s	RES, CHIP 1.0K (1005)
R716	1-208-887-81	s	RES, CHIP 1.0K (1005)
R717	1-208-911-81	s	RES, CHIP 10K (1005)
R728	1-208-911-81	s	RES, CHIP 10K (1005)
R729	1-208-887-81	s	RES, CHIP 1.0K (1005)
R730	1-208-855-81	s	RES, CHIP 47 (1005)
R731	1-208-855-81	s	RES, CHIP 47 (1005)
R732	1-208-855-81	s	RES, CHIP 47 (1005)
R733	1-208-855-81	s	RES, CHIP 47 (1005)
R734	1-208-911-81	s	RES, CHIP 10K (1005)
R735	1-208-855-81	s	RES, CHIP 47 (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-911-81	s	RES, CHIP 10K (1005)
R738	1-208-911-81	s	RES, CHIP 10K (1005)
R739	1-208-911-81	s	RES, CHIP 10K (1005)
R740	1-208-911-81	s	RES, CHIP 10K (1005)
R741	1-208-911-81	s	RES, CHIP 10K (1005)
R748	1-208-863-81	s	RES, CHIP 100 (1005)
R749	1-208-863-81	s	RES, CHIP 100 (1005)
R750	1-208-863-81	s	RES, CHIP 100 (1005)
R751	1-208-863-81	s	RES, CHIP 100 (1005)
R764	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R765	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R768	1-208-863-81	s	RES, CHIP 100 (1005)
R776	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R777	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R780	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R781	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R782	1-208-887-81	s	RES, CHIP 1.0K (1005)
R783	1-208-887-81	s	RES, CHIP 1.0K (1005)
R948	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R949	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R951	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R968	1-208-871-81	s	RES, CHIP 220 (1005)
R969	1-208-871-81	s	RES, CHIP 220 (1005)
R970	1-208-871-81	s	RES, CHIP 220 (1005)
R971	1-208-871-81	s	RES, CHIP 220 (1005)
R1027	1-220-878-81	s	RES, CHIP 22 (1005)
R1032	1-220-882-81	s	RES, CHIP 33 (1005)
R1033	1-220-882-81	s	RES, CHIP 33 (1005)
R1034	1-220-882-81	s	RES, CHIP 33 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1035	1-220-882-81	s	RES, CHIP 33 (1005)
R1036	1-220-882-81	s	RES, CHIP 33 (1005)
R1037	1-220-882-81	s	RES, CHIP 33 (1005)
R1038	1-220-882-81	s	RES, CHIP 33 (1005)
R1039	1-220-882-81	s	RES, CHIP 33 (1005)
R1040	1-220-882-81	s	RES, CHIP 33 (1005)
R1041	1-220-882-81	s	RES, CHIP 33 (1005)
R1042	1-208-860-81	s	RES, CHIP 75 (1005)
R1043	1-208-860-81	s	RES, CHIP 75 (1005)
R1044	1-208-860-81	s	RES, CHIP 75 (1005)
R1045	1-208-860-81	s	RES, CHIP 75 (1005)
R1046	1-208-860-81	s	RES, CHIP 75 (1005)
R1047	1-208-860-81	s	RES, CHIP 75 (1005)
R1056	1-220-882-81	s	RES, CHIP 33 (1005)
R1057	1-220-882-81	s	RES, CHIP 33 (1005)
R1058	1-208-911-81	s	RES, CHIP 10K (1005)
R1100	1-208-855-81	s	RES, CHIP 47 (1005)
R1101	1-208-855-81	s	RES, CHIP 47 (1005)
R1102	1-208-855-81	s	RES, CHIP 47 (1005)
R1103	1-208-855-81	s	RES, CHIP 47 (1005)
R1104	1-208-855-81	s	RES, CHIP 47 (1005)
R1105	1-208-855-81	s	RES, CHIP 47 (1005)
R1106	1-208-855-81	s	RES, CHIP 47 (1005)
R1107	1-208-855-81	s	RES, CHIP 47 (1005)
R1108	1-208-855-81	s	RES, CHIP 47 (1005)
R1109	1-208-855-81	s	RES, CHIP 47 (1005)
R1110	1-208-855-81	s	RES, CHIP 47 (1005)
R1111	1-208-855-81	s	RES, CHIP 47 (1005)
R1113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1114	1-220-870-81	s	RES, CHIP 10 (1005)
R1115	1-220-870-81	s	RES, CHIP 10 (1005)
R1116	1-220-870-81	s	RES, CHIP 10 (1005)
R1117	1-220-870-81	s	RES, CHIP 10 (1005)
R1118	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1119	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1120	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1121	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1122	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1123	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1124	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1126	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1127	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1128	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1129	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1130	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1131	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1133	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1135	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1136	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1137	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1138	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1139	1-208-855-81	s	RES, CHIP 47 (1005)
R1140	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1141	1-208-855-81	s	RES, CHIP 47 (1005)
R1142	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1143	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1144	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1145	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1146	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1147	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1148	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1149	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1150	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1154	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1155	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1156	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1157	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1158	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1159	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1160	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1161	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1162	1-220-870-81	s	RES, CHIP 10 (1005)
R1163	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1164	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1167	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1168	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1170	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1174	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1175	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1176	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1177	1-208-911-81	s	RES, CHIP 10K (1005)
R1178	1-208-855-81	s	RES, CHIP 47 (1005)
R1179	1-208-855-81	s	RES, CHIP 47 (1005)
R1180	1-208-855-81	s	RES, CHIP 47 (1005)
R1181	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1182	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1183	1-208-855-81	s	RES, CHIP 47 (1005)
R1184	1-208-855-81	s	RES, CHIP 47 (1005)
R1185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1186	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1187	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1191	1-208-911-81	s	RES, CHIP 10K (1005)
R1192	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1194	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1195	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1196	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1200	1-208-855-81	s	RES, CHIP 47 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-208-855-81	s	RES, CHIP 47 (1005)
R1204	1-208-855-81	s	RES, CHIP 47 (1005)
R1205	1-208-855-81	s	RES, CHIP 47 (1005)
R1206	1-208-855-81	s	RES, CHIP 47 (1005)
R1207	1-208-855-81	s	RES, CHIP 47 (1005)
R1208	1-208-855-81	s	RES, CHIP 47 (1005)
R1209	1-208-855-81	s	RES, CHIP 47 (1005)
R1210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1211	1-208-911-81	s	RES, CHIP 10K (1005)
R1212	1-220-870-81	s	RES, CHIP 10 (1005)
R1213	1-220-870-81	s	RES, CHIP 10 (1005)
R1216	1-208-911-81	s	RES, CHIP 10K (1005)
R1217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1218	1-208-911-81	s	RES, CHIP 10K (1005)
R1219	1-208-911-81	s	RES, CHIP 10K (1005)
R1300	1-220-878-81	s	RES, CHIP 22 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1301	1-220-878-81	s	RES, CHIP 22 (1005)
R1302	1-208-863-81	s	RES, CHIP 100 (1005)
R1303	1-208-855-81	s	RES, CHIP 47 (1005)
R1304	1-208-855-81	s	RES, CHIP 47 (1005)
R1307	1-208-935-81	s	RES, CHIP 100K (1005)
R1308	1-208-855-81	s	RES, CHIP 47 (1005)
R1309	1-208-855-81	s	RES, CHIP 47 (1005)
R1310	1-208-935-81	s	RES, CHIP 100K (1005)
R1311	1-208-855-81	s	RES, CHIP 47 (1005)
R1312	1-208-855-81	s	RES, CHIP 47 (1005)
R1313	1-208-935-81	s	RES, CHIP 100K (1005)
R1314	1-220-878-81	s	RES, CHIP 22 (1005)
R1315	1-220-878-81	s	RES, CHIP 22 (1005)
R1316	1-208-863-81	s	RES, CHIP 100 (1005)
R1317	1-220-882-81	s	RES, CHIP 33 (1005)
R1318	1-220-882-81	s	RES, CHIP 33 (1005)
R1321	1-208-935-81	s	RES, CHIP 100K (1005)
R1322	1-220-882-81	s	RES, CHIP 33 (1005)
R1323	1-220-882-81	s	RES, CHIP 33 (1005)
R1324	1-208-935-81	s	RES, CHIP 100K (1005)
R1325	1-220-882-81	s	RES, CHIP 33 (1005)
R1326	1-220-882-81	s	RES, CHIP 33 (1005)
R1327	1-208-935-81	s	RES, CHIP 100K (1005)
R1328	1-220-878-81	s	RES, CHIP 22 (1005)
R1329	1-220-878-81	s	RES, CHIP 22 (1005)
R1330	1-220-878-81	s	RES, CHIP 22 (1005)
R1331	1-220-878-81	s	RES, CHIP 22 (1005)
R1332	1-208-863-81	s	RES, CHIP 100 (1005)
R1333	1-208-863-81	s	RES, CHIP 100 (1005)
R1334	1-220-878-81	s	RES, CHIP 22 (1005)
R1335	1-220-878-81	s	RES, CHIP 22 (1005)
R1336	1-220-878-81	s	RES, CHIP 22 (1005)
R1337	1-220-878-81	s	RES, CHIP 22 (1005)
R1338	1-208-863-81	s	RES, CHIP 100 (1005)
R1339	1-208-863-81	s	RES, CHIP 100 (1005)
R1448	1-208-863-81	s	RES, CHIP 100 (1005)
R1449	1-208-863-81	s	RES, CHIP 100 (1005)
R1450	1-208-863-81	s	RES, CHIP 100 (1005)
R1451	1-208-863-81	s	RES, CHIP 100 (1005)
R1452	1-208-871-81	s	RES, CHIP 220 (1005)
R1453	1-208-871-81	s	RES, CHIP 220 (1005)
R1454	1-208-871-81	s	RES, CHIP 220 (1005)
R1455	1-208-871-81	s	RES, CHIP 220 (1005)
R1456	1-208-911-81	s	RES, CHIP 10K (1005)
R1501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1503	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1504	1-208-911-81	s	RES, CHIP 10K (1005)
R1505	1-208-911-81	s	RES, CHIP 10K (1005)
R1508	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1512	1-220-878-81	s	RES, CHIP 22 (1005)
R1513	1-220-878-81	s	RES, CHIP 22 (1005)
R1514	1-220-878-81	s	RES, CHIP 22 (1005)
R1515	1-220-878-81	s	RES, CHIP 22 (1005)
R1516	1-220-878-81	s	RES, CHIP 22 (1005)
R1517	1-208-867-81	s	RES, CHIP 150 (1005)
R1519	1-220-878-81	s	RES, CHIP 22 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1520	1-220-878-81	s	RES, CHIP 22 (1005)
R1521	1-220-878-81	s	RES, CHIP 22 (1005)
R1522	1-220-878-81	s	RES, CHIP 22 (1005)
R1523	1-220-878-81	s	RES, CHIP 22 (1005)
R1524	1-208-867-81	s	RES, CHIP 150 (1005)
R1526	1-208-863-81	s	RES, CHIP 100 (1005)
R1527	1-208-863-81	s	RES, CHIP 100 (1005)
R1532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1533	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-911-81	s	RES, CHIP 10K (1005)
R1608	1-208-911-81	s	RES, CHIP 10K (1005)
R1609	1-208-911-81	s	RES, CHIP 10K (1005)
R1610	1-208-911-81	s	RES, CHIP 10K (1005)
R1611	1-208-911-81	s	RES, CHIP 10K (1005)
R1612	1-208-911-81	s	RES, CHIP 10K (1005)
R1613	1-208-911-81	s	RES, CHIP 10K (1005)
R1614	1-208-911-81	s	RES, CHIP 10K (1005)
R1615	1-208-911-81	s	RES, CHIP 10K (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-911-81	s	RES, CHIP 10K (1005)
R1619	1-208-911-81	s	RES, CHIP 10K (1005)
R1620	1-208-911-81	s	RES, CHIP 10K (1005)
R1621	1-208-911-81	s	RES, CHIP 10K (1005)
R1622	1-208-911-81	s	RES, CHIP 10K (1005)
R1623	1-208-911-81	s	RES, CHIP 10K (1005)
R1624	1-208-911-81	s	RES, CHIP 10K (1005)
R1625	1-208-911-81	s	RES, CHIP 10K (1005)
R1626	1-208-911-81	s	RES, CHIP 10K (1005)
R1627	1-208-911-81	s	RES, CHIP 10K (1005)
R1628	1-208-911-81	s	RES, CHIP 10K (1005)
R1629	1-208-911-81	s	RES, CHIP 10K (1005)
R1630	1-208-911-81	s	RES, CHIP 10K (1005)
R1631	1-208-911-81	s	RES, CHIP 10K (1005)
R1632	1-208-911-81	s	RES, CHIP 10K (1005)
R1633	1-208-911-81	s	RES, CHIP 10K (1005)
R1634	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1635	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1636	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1641	1-208-863-81	s	RES, CHIP 100 (1005)
R1642	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1643	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1644	1-208-911-81	s	RES, CHIP 10K (1005)
R1645	1-208-911-81	s	RES, CHIP 10K (1005)
R1646	1-208-911-81	s	RES, CHIP 10K (1005)
R1647	1-208-911-81	s	RES, CHIP 10K (1005)
R1648	1-208-911-81	s	RES, CHIP 10K (1005)
R1649	1-208-911-81	s	RES, CHIP 10K (1005)
R1650	1-208-911-81	s	RES, CHIP 10K (1005)
R1651	1-208-911-81	s	RES, CHIP 10K (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-208-911-81	s	RES, CHIP 10K (1005)
R1655	1-208-911-81	s	RES, CHIP 10K (1005)
R1656	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1657	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1658	1-208-863-81	s	RES, CHIP 100 (1005)
R1659	1-208-863-81	s	RES, CHIP 100 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1660	1-208-863-81	s	RES, CHIP 100 (1005)
R1661	1-208-863-81	s	RES, CHIP 100 (1005)
R1663	1-208-863-81	s	RES, CHIP 100 (1005)
R1664	1-208-863-81	s	RES, CHIP 100 (1005)
R1666	1-208-863-81	s	RES, CHIP 100 (1005)
R1667	1-208-863-81	s	RES, CHIP 100 (1005)
R1668	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1669	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1670	1-208-855-81	s	RES, CHIP 47 (1005)
R1671	1-208-855-81	s	RES, CHIP 47 (1005)
R1672	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1673	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1674	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1675	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1678	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1679	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1680	1-208-863-81	s	RES, CHIP 100 (1005)
R1681	1-208-863-81	s	RES, CHIP 100 (1005)
R1682	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1683	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1684	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1685	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1686	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1687	1-208-855-81	s	RES, CHIP 47 (1005)
R1688	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1689	1-208-855-81	s	RES, CHIP 47 (1005)
R1690	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1691	1-208-855-81	s	RES, CHIP 47 (1005)
R1692	1-208-855-81	s	RES, CHIP 47 (1005)
R1693	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1694	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1695	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1696	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1697	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1698	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1699	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1700	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1701	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1702	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1703	1-208-911-81	s	RES, CHIP 10K (1005)
R1705	1-208-911-81	s	RES, CHIP 10K (1005)
R1706	1-208-911-81	s	RES, CHIP 10K (1005)
R1707	1-208-911-81	s	RES, CHIP 10K (1005)
R1708	1-208-911-81	s	RES, CHIP 10K (1005)
R1709	1-208-911-81	s	RES, CHIP 10K (1005)
R1710	1-208-911-81	s	RES, CHIP 10K (1005)
R1715	1-208-911-81	s	RES, CHIP 10K (1005)
R1716	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1717	1-208-855-81	s	RES, CHIP 47 (1005)
R1718	1-208-855-81	s	RES, CHIP 47 (1005)
R1719	1-208-855-81	s	RES, CHIP 47 (1005)
R1720	1-208-855-81	s	RES, CHIP 47 (1005)
R1721	1-208-911-81	s	RES, CHIP 10K (1005)
R1722	1-208-911-81	s	RES, CHIP 10K (1005)
R1723	1-208-855-81	s	RES, CHIP 47 (1005)
R1724	1-208-911-81	s	RES, CHIP 10K (1005)
R1725	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1726	1-208-911-81	s	RES, CHIP 10K (1005)
R1727	1-208-911-81	s	RES, CHIP 10K (1005)
R1728	1-208-911-81	s	RES, CHIP 10K (1005)
R1729	1-208-911-81	s	RES, CHIP 10K (1005)
R1730	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1731	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1733	1-208-863-81	s	RES, CHIP 100 (1005)
R1737	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1748	1-208-863-81	s	RES, CHIP 100 (1005)
R1749	1-208-863-81	s	RES, CHIP 100 (1005)
R1753	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1754	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1757	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1758	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1900	1-208-855-81	s	RES, CHIP 47 (1005)
R1901	1-208-855-81	s	RES, CHIP 47 (1005)
R1902	1-208-855-81	s	RES, CHIP 47 (1005)
R1903	1-208-855-81	s	RES, CHIP 47 (1005)
R1904	1-208-855-81	s	RES, CHIP 47 (1005)
R1905	1-208-855-81	s	RES, CHIP 47 (1005)
R1906	1-208-855-81	s	RES, CHIP 47 (1005)
R1907	1-208-855-81	s	RES, CHIP 47 (1005)
R1908	1-208-855-81	s	RES, CHIP 47 (1005)
R1909	1-208-855-81	s	RES, CHIP 47 (1005)
R1910	1-208-855-81	s	RES, CHIP 47 (1005)
R1911	1-208-855-81	s	RES, CHIP 47 (1005)
R1912	1-208-871-81	s	RES, CHIP 220 (1005)
R1913	1-208-871-81	s	RES, CHIP 220 (1005)
R1914	1-208-871-81	s	RES, CHIP 220 (1005)
R1915	1-208-871-81	s	RES, CHIP 220 (1005)
R1916	1-208-863-81	s	RES, CHIP 100 (1005)
R1917	1-208-863-81	s	RES, CHIP 100 (1005)
R1918	1-208-863-81	s	RES, CHIP 100 (1005)
R1919	1-208-863-81	s	RES, CHIP 100 (1005)
R1920	1-208-855-81	s	RES, CHIP 47 (1005)
R1921	1-208-855-81	s	RES, CHIP 47 (1005)
R1922	1-208-911-81	s	RES, CHIP 10K (1005)
R1923	1-208-911-81	s	RES, CHIP 10K (1005)
R1924	1-208-911-81	s	RES, CHIP 10K (1005)
R1925	1-208-911-81	s	RES, CHIP 10K (1005)
R1926	1-208-911-81	s	RES, CHIP 10K (1005)
R1927	1-208-911-81	s	RES, CHIP 10K (1005)
R1928	1-208-911-81	s	RES, CHIP 10K (1005)
R1929	1-208-911-81	s	RES, CHIP 10K (1005)
R1930	1-208-911-81	s	RES, CHIP 10K (1005)
R1931	1-208-911-81	s	RES, CHIP 10K (1005)
R1932	1-208-911-81	s	RES, CHIP 10K (1005)
R1933	1-208-911-81	s	RES, CHIP 10K (1005)
R1934	1-208-911-81	s	RES, CHIP 10K (1005)
R1935	1-208-911-81	s	RES, CHIP 10K (1005)
R1936	1-208-911-81	s	RES, CHIP 10K (1005)
R1937	1-208-911-81	s	RES, CHIP 10K (1005)
R1938	1-208-911-81	s	RES, CHIP 10K (1005)
R1939	1-208-911-81	s	RES, CHIP 10K (1005)
R1940	1-208-911-81	s	RES, CHIP 10K (1005)
R1941	1-208-911-81	s	RES, CHIP 10K (1005)
R1942	1-208-911-81	s	RES, CHIP 10K (1005)
R1943	1-208-911-81	s	RES, CHIP 10K (1005)
R1944	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1945	1-208-911-81	s	RES, CHIP 10K (1005)
R1946	1-208-911-81	s	RES, CHIP 10K (1005)
R1947	1-208-911-81	s	RES, CHIP 10K (1005)
R1948	1-208-911-81	s	RES, CHIP 10K (1005)
R1949	1-208-911-81	s	RES, CHIP 10K (1005)
R1950	1-208-911-81	s	RES, CHIP 10K (1005)
R1951	1-208-911-81	s	RES, CHIP 10K (1005)
R1952	1-208-911-81	s	RES, CHIP 10K (1005)
R1953	1-208-911-81	s	RES, CHIP 10K (1005)
R1954	1-208-911-81	s	RES, CHIP 10K (1005)
R1955	1-208-911-81	s	RES, CHIP 10K (1005)
R1956	1-208-911-81	s	RES, CHIP 10K (1005)
R1957	1-208-911-81	s	RES, CHIP 10K (1005)
R1958	1-208-911-81	s	RES, CHIP 10K (1005)
R1959	1-208-911-81	s	RES, CHIP 10K (1005)
R1960	1-208-911-81	s	RES, CHIP 10K (1005)
R1961	1-208-911-81	s	RES, CHIP 10K (1005)
R1962	1-208-911-81	s	RES, CHIP 10K (1005)
R1963	1-208-855-81	s	RES, CHIP 47 (1005)
R1964	1-208-855-81	s	RES, CHIP 47 (1005)
R1965	1-208-855-81	s	RES, CHIP 47 (1005)
R1966	1-208-855-81	s	RES, CHIP 47 (1005)
R1967	1-208-855-81	s	RES, CHIP 47 (1005)
R1968	1-208-855-81	s	RES, CHIP 47 (1005)
R1969	1-208-855-81	s	RES, CHIP 47 (1005)
R1970	1-208-855-81	s	RES, CHIP 47 (1005)
R2000	1-208-861-81	s	RES, CHIP 82 (1005)
R2001	1-208-861-81	s	RES, CHIP 82 (1005)
R2002	1-208-859-81	s	RES, CHIP 68 (1005)
R2003	1-208-859-81	s	RES, CHIP 68 (1005)
R2005	1-208-855-81	s	RES, CHIP 47 (1005)
R2006	1-208-859-81	s	RES, CHIP 68 (1005)
R2007	1-208-855-81	s	RES, CHIP 47 (1005)
R2008	1-208-859-81	s	RES, CHIP 68 (1005)
R2011	1-208-855-81	s	RES, CHIP 47 (1005)
R2012	1-208-855-81	s	RES, CHIP 47 (1005)
R2013	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2016	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2017	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2018	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2039	1-220-870-81	s	RES, CHIP 10 (1005)
R2040	1-220-870-81	s	RES, CHIP 10 (1005)
R2041	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2042	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2043	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2044	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2045	1-220-870-81	s	RES, CHIP 10 (1005)
R2046	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2058	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2059	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2061	1-208-855-81	s	RES, CHIP 47 (1005)
R2062	1-208-855-81	s	RES, CHIP 47 (1005)
R2063	1-208-855-81	s	RES, CHIP 47 (1005)
R2064	1-208-855-81	s	RES, CHIP 47 (1005)
R2065	1-208-911-81	s	RES, CHIP 10K (1005)
R2070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2076	1-208-911-81	s	RES, CHIP 10K (1005)
R2080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-855-81	s	RES, CHIP 47 (1005)
R2101	1-208-855-81	s	RES, CHIP 47 (1005)
R2102	1-208-855-81	s	RES, CHIP 47 (1005)
R2103	1-208-855-81	s	RES, CHIP 47 (1005)
R2104	1-208-855-81	s	RES, CHIP 47 (1005)
R2105	1-208-855-81	s	RES, CHIP 47 (1005)
R2106	1-220-878-81	s	RES, CHIP 22 (1005)
R2107	1-220-878-81	s	RES, CHIP 22 (1005)
R2108	1-220-878-81	s	RES, CHIP 22 (1005)
R2109	1-220-878-81	s	RES, CHIP 22 (1005)
R2110	1-208-855-81	s	RES, CHIP 47 (1005)
R2111	1-208-855-81	s	RES, CHIP 47 (1005)
R2112	1-208-855-81	s	RES, CHIP 47 (1005)
R2113	1-208-855-81	s	RES, CHIP 47 (1005)
R2114	1-208-863-81	s	RES, CHIP 100 (1005)
R2115	1-208-863-81	s	RES, CHIP 100 (1005)
R2116	1-208-863-81	s	RES, CHIP 100 (1005)
R2117	1-208-863-81	s	RES, CHIP 100 (1005)
R2118	1-208-863-81	s	RES, CHIP 100 (1005)
R2119	1-208-863-81	s	RES, CHIP 100 (1005)
R2120	1-208-863-81	s	RES, CHIP 100 (1005)
R2121	1-208-863-81	s	RES, CHIP 100 (1005)
R2122	1-208-863-81	s	RES, CHIP 100 (1005)
R2123	1-208-863-81	s	RES, CHIP 100 (1005)
R2124	1-208-863-81	s	RES, CHIP 100 (1005)
R2125	1-208-863-81	s	RES, CHIP 100 (1005)
R2126	1-208-863-81	s	RES, CHIP 100 (1005)
R2127	1-208-863-81	s	RES, CHIP 100 (1005)
R2128	1-208-863-81	s	RES, CHIP 100 (1005)
R2129	1-208-863-81	s	RES, CHIP 100 (1005)
R2130	1-208-863-81	s	RES, CHIP 100 (1005)
R2131	1-208-863-81	s	RES, CHIP 100 (1005)
R2132	1-208-863-81	s	RES, CHIP 100 (1005)
R2133	1-208-863-81	s	RES, CHIP 100 (1005)
R2134	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2138	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2139	1-208-911-81	s	RES, CHIP 10K (1005)
R2142	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2143	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2145	1-208-911-81	s	RES, CHIP 10K (1005)
R2146	1-208-911-81	s	RES, CHIP 10K (1005)
R2147	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2148	1-208-911-81	s	RES, CHIP 10K (1005)
R2149	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2150	1-208-911-81	s	RES, CHIP 10K (1005)
R2152	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2153	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2154	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2155	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2156	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2157	1-208-935-81	s	RES, CHIP 100K (1005)
R2158	1-208-935-81	s	RES, CHIP 100K (1005)
R2159	1-208-855-81	s	RES, CHIP 47 (1005)
R2160	1-208-855-81	s	RES, CHIP 47 (1005)
R2161	1-208-855-81	s	RES, CHIP 47 (1005)
R2162	1-208-855-81	s	RES, CHIP 47 (1005)
R2163	1-208-855-81	s	RES, CHIP 47 (1005)
R2200	1-208-935-81	s	RES, CHIP 100K (1005)
R2201	1-208-935-81	s	RES, CHIP 100K (1005)
R2202	1-208-855-81	s	RES, CHIP 47 (1005)
R2203	1-208-855-81	s	RES, CHIP 47 (1005)
R2204	1-208-927-81	s	RES, CHIP 47K (1005)
R2205	1-208-927-81	s	RES, CHIP 47K (1005)
R2206	1-208-863-81	s	RES, CHIP 100 (1005)
R2207	1-208-863-81	s	RES, CHIP 100 (1005)
R2208	1-208-935-81	s	RES, CHIP 100K (1005)
R2211	1-208-935-81	s	RES, CHIP 100K (1005)
R2214	1-208-881-81	s	RES, CHIP 560 (1005)
R2215	1-208-935-81	s	RES, CHIP 100K (1005)
R2216	1-208-881-81	s	RES, CHIP 560 (1005)
R2217	1-208-935-81	s	RES, CHIP 100K (1005)
R2220	1-208-871-81	s	RES, CHIP 220 (1005)
R2221	1-208-870-81	s	RES, CHIP 200 (1005)
R2222	1-208-911-81	s	RES, CHIP 10K (1005)
R2223	1-208-911-81	s	RES, CHIP 10K (1005)
R2224	1-208-911-81	s	RES, CHIP 10K (1005)
R2225	1-208-911-81	s	RES, CHIP 10K (1005)
R2226	1-208-867-81	s	RES, CHIP 150 (1005)
R2227	1-208-867-81	s	RES, CHIP 150 (1005)
R2228	1-220-876-81	s	RES, CHIP 18 (1005)
R2229	1-208-861-81	s	RES, CHIP 82 (1005)
R2230	1-220-876-81	s	RES, CHIP 18 (1005)
R2231	1-208-861-81	s	RES, CHIP 82 (1005)
R2232	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2233	1-208-893-81	s	RES, CHIP 1.8K (1005)
R2234	1-208-867-81	s	RES, CHIP 150 (1005)
R2235	1-208-867-81	s	RES, CHIP 150 (1005)
R2236	1-208-867-81	s	RES, CHIP 150 (1005)
R2237	1-208-867-81	s	RES, CHIP 150 (1005)
R2238	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2239	1-208-911-81	s	RES, CHIP 10K (1005)
R2240	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2241	1-208-911-81	s	RES, CHIP 10K (1005)
R2242	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2243	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2244	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2245	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2246	1-218-903-91	s	RES, CHIP 220K (1608)
R2247	1-218-903-91	s	RES, CHIP 220K (1608)
R2248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2249	1-208-927-81	s	RES, CHIP 47K (1005)
R2250	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2251	1-208-927-81	s	RES, CHIP 47K (1005)
R2252	1-220-870-81	s	RES, CHIP 10 (1005)
R2253	1-220-870-81	s	RES, CHIP 10 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2254	1-208-935-81	s	RES, CHIP 100K (1005)
R2255	1-208-935-81	s	RES, CHIP 100K (1005)
R2256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2258	1-208-855-81	s	RES, CHIP 47 (1005)
R2259	1-208-899-81	s	RES, CHIP 3.3K (1005)
R2260	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2261	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2262	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2263	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2264	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2265	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2266	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2267	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2268	1-208-919-81	s	RES, CHIP 22K (1005)
R2269	1-208-919-81	s	RES, CHIP 22K (1005)
R2270	1-208-860-81	s	RES, CHIP 75 (1005)
R2271	1-208-860-81	s	RES, CHIP 75 (1005)
R2272	1-208-860-81	s	RES, CHIP 75 (1005)
R2273	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2274	1-208-860-81	s	RES, CHIP 75 (1005)
R2275	1-208-863-81	s	RES, CHIP 100 (1005)
R2276	1-208-863-81	s	RES, CHIP 100 (1005)
R2282	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2285	1-220-870-81	s	RES, CHIP 10 (1005)
R2289	1-220-870-81	s	RES, CHIP 10 (1005)
R2293	1-220-870-81	s	RES, CHIP 10 (1005)
R2294	1-220-870-81	s	RES, CHIP 10 (1005)
R2295	1-208-863-81	s	RES, CHIP 100 (1005)
R2297	1-208-863-81	s	RES, CHIP 100 (1005)
R2301	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-855-81	s	RES, CHIP 47 (1005)
R2303	1-208-855-81	s	RES, CHIP 47 (1005)
R2304	1-208-855-81	s	RES, CHIP 47 (1005)
R2305	1-208-855-81	s	RES, CHIP 47 (1005)
R2306	1-208-855-81	s	RES, CHIP 47 (1005)
R2307	1-208-911-81	s	RES, CHIP 10K (1005)
R2308	1-208-911-81	s	RES, CHIP 10K (1005)
R2309	1-208-911-81	s	RES, CHIP 10K (1005)
R2310	1-208-911-81	s	RES, CHIP 10K (1005)
R2311	1-208-855-81	s	RES, CHIP 47 (1005)
R2312	1-208-855-81	s	RES, CHIP 47 (1005)
R2313	1-208-855-81	s	RES, CHIP 47 (1005)
R2314	1-208-855-81	s	RES, CHIP 47 (1005)
R2315	1-208-855-81	s	RES, CHIP 47 (1005)
R2316	1-208-855-81	s	RES, CHIP 47 (1005)
R2317	1-208-855-81	s	RES, CHIP 47 (1005)
R2318	1-208-855-81	s	RES, CHIP 47 (1005)
R2319	1-208-855-81	s	RES, CHIP 47 (1005)
R2320	1-208-855-81	s	RES, CHIP 47 (1005)
R2321	1-208-855-81	s	RES, CHIP 47 (1005)
R2322	1-208-855-81	s	RES, CHIP 47 (1005)
R2323	1-208-855-81	s	RES, CHIP 47 (1005)
R2324	1-208-855-81	s	RES, CHIP 47 (1005)
R2325	1-208-855-81	s	RES, CHIP 47 (1005)
R2326	1-208-855-81	s	RES, CHIP 47 (1005)
R2327	1-208-911-81	s	RES, CHIP 10K (1005)
R2328	1-208-911-81	s	RES, CHIP 10K (1005)
R2329	1-208-911-81	s	RES, CHIP 10K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2330	1-208-911-81	s	RES, CHIP 10K (1005)
R2331	1-208-911-81	s	RES, CHIP 10K (1005)
R2332	1-208-911-81	s	RES, CHIP 10K (1005)
R2334	1-208-855-81	s	RES, CHIP 47 (1005)
R2335	1-208-855-81	s	RES, CHIP 47 (1005)
R2336	1-208-855-81	s	RES, CHIP 47 (1005)
R2337	1-208-855-81	s	RES, CHIP 47 (1005)
R2339	1-208-855-81	s	RES, CHIP 47 (1005)
R2340	1-208-855-81	s	RES, CHIP 47 (1005)
R2341	1-208-855-81	s	RES, CHIP 47 (1005)
R2342	1-208-855-81	s	RES, CHIP 47 (1005)
R2343	1-208-855-81	s	RES, CHIP 47 (1005)
R2344	1-208-855-81	s	RES, CHIP 47 (1005)
R2345	1-208-855-81	s	RES, CHIP 47 (1005)
R2346	1-208-855-81	s	RES, CHIP 47 (1005)
R2347	1-208-855-81	s	RES, CHIP 47 (1005)
R2348	1-208-911-81	s	RES, CHIP 10K (1005)
R2349	1-208-855-81	s	RES, CHIP 47 (1005)
R2350	1-208-911-81	s	RES, CHIP 10K (1005)
R2351	1-208-855-81	s	RES, CHIP 47 (1005)
R2352	1-208-855-81	s	RES, CHIP 47 (1005)
R2353	1-208-855-81	s	RES, CHIP 47 (1005)
R2354	1-208-855-81	s	RES, CHIP 47 (1005)
R2355	1-208-855-81	s	RES, CHIP 47 (1005)
R2401	1-208-935-81	s	RES, CHIP 100K (1005)
R2403	1-208-935-81	s	RES, CHIP 100K (1005)
R2404	1-208-911-81	s	RES, CHIP 10K (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-855-81	s	RES, CHIP 47 (1005)
R2407	1-208-855-81	s	RES, CHIP 47 (1005)
R2408	1-208-855-81	s	RES, CHIP 47 (1005)
R2409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-208-911-81	s	RES, CHIP 10K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2412	1-208-855-81	s	RES, CHIP 47 (1005)
R2413	1-208-855-81	s	RES, CHIP 47 (1005)
R2414	1-220-878-81	s	RES, CHIP 22 (1005)
R2415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2417	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2418	1-220-878-81	s	RES, CHIP 22 (1005)
R2419	1-220-878-81	s	RES, CHIP 22 (1005)
R2420	1-220-878-81	s	RES, CHIP 22 (1005)
R2421	1-220-878-81	s	RES, CHIP 22 (1005)
R2422	1-220-878-81	s	RES, CHIP 22 (1005)
R2423	1-220-878-81	s	RES, CHIP 22 (1005)
R2424	1-220-878-81	s	RES, CHIP 22 (1005)
R2425	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-208-911-81	s	RES, CHIP 10K (1005)
R2429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2432	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2434	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2437	1-208-911-81	s	RES, CHIP 10K (1005)
R2440	1-208-911-81	s	RES, CHIP 10K (1005)
R2443	1-208-911-81	s	RES, CHIP 10K (1005)
R2445	1-208-911-81	s	RES, CHIP 10K (1005)
R2446	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2447	1-208-911-81	s	RES, CHIP 10K (1005)
R2448	1-208-911-81	s	RES, CHIP 10K (1005)
R2449	1-208-911-81	s	RES, CHIP 10K (1005)
R2450	1-208-911-81	s	RES, CHIP 10K (1005)
R2451	1-208-911-81	s	RES, CHIP 10K (1005)
R2452	1-208-911-81	s	RES, CHIP 10K (1005)
R2453	1-208-911-81	s	RES, CHIP 10K (1005)
R2454	1-208-911-81	s	RES, CHIP 10K (1005)
R2455	1-208-911-81	s	RES, CHIP 10K (1005)
R2456	1-208-911-81	s	RES, CHIP 10K (1005)
R2457	1-208-911-81	s	RES, CHIP 10K (1005)
R2458	1-208-911-81	s	RES, CHIP 10K (1005)
R2459	1-208-911-81	s	RES, CHIP 10K (1005)
R2460	1-208-855-81	s	RES, CHIP 47 (1005)
R2461	1-208-911-81	s	RES, CHIP 10K (1005)
R2462	1-208-911-81	s	RES, CHIP 10K (1005)
R2463	1-208-911-81	s	RES, CHIP 10K (1005)
R2464	1-208-911-81	s	RES, CHIP 10K (1005)
R2465	1-208-855-81	s	RES, CHIP 47 (1005)
R2466	1-208-855-81	s	RES, CHIP 47 (1005)
R2467	1-208-855-81	s	RES, CHIP 47 (1005)
R2468	1-208-855-81	s	RES, CHIP 47 (1005)
R2469	1-208-911-81	s	RES, CHIP 10K (1005)
R2470	1-208-911-81	s	RES, CHIP 10K (1005)
R2471	1-208-855-81	s	RES, CHIP 47 (1005)
R2472	1-208-855-81	s	RES, CHIP 47 (1005)
R2473	1-208-855-81	s	RES, CHIP 47 (1005)
R2474	1-208-855-81	s	RES, CHIP 47 (1005)
R2475	1-208-855-81	s	RES, CHIP 47 (1005)
R2476	1-208-855-81	s	RES, CHIP 47 (1005)
R2479	1-208-871-81	s	RES, CHIP 220 (1005)
R2480	1-208-871-81	s	RES, CHIP 220 (1005)
R2481	1-208-871-81	s	RES, CHIP 220 (1005)
R2483	1-208-911-81	s	RES, CHIP 10K (1005)
R2484	1-208-875-81	s	RES, CHIP 330 (1005)
R2485	1-208-911-81	s	RES, CHIP 10K (1005)
R2486	1-208-855-81	s	RES, CHIP 47 (1005)
R2487	1-208-855-81	s	RES, CHIP 47 (1005)
R2500	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2501	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2502	1-208-911-81	s	RES, CHIP 10K (1005)
R2503	1-208-911-81	s	RES, CHIP 10K (1005)
R2504	1-208-911-81	s	RES, CHIP 10K (1005)
R2505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2507	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2508	1-208-911-81	s	RES, CHIP 10K (1005)
R2509	1-208-911-81	s	RES, CHIP 10K (1005)
R2510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2512	1-208-911-81	s	RES, CHIP 10K (1005)
R2513	1-208-911-81	s	RES, CHIP 10K (1005)
R2514	1-208-911-81	s	RES, CHIP 10K (1005)
R2515	1-208-911-81	s	RES, CHIP 10K (1005)
R2516	1-208-911-81	s	RES, CHIP 10K (1005)
R2517	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2518	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2519	1-208-855-81	s	RES, CHIP 47 (1005)
R2520	1-208-855-81	s	RES, CHIP 47 (1005)
R2521	1-208-855-81	s	RES, CHIP 47 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2522	1-208-855-81	s	RES, CHIP 47 (1005)
R2523	1-208-855-81	s	RES, CHIP 47 (1005)
R2524	1-208-855-81	s	RES, CHIP 47 (1005)
R2525	1-208-855-81	s	RES, CHIP 47 (1005)
R2526	1-208-855-81	s	RES, CHIP 47 (1005)
R2527	1-208-855-81	s	RES, CHIP 47 (1005)
R2528	1-208-867-81	s	RES, CHIP 150 (1005)
R2530	1-208-863-81	s	RES, CHIP 100 (1005)
R2534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2535	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2536	1-208-889-81	s	RES, CHIP 1.2K (1005)
R2537	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2538	1-208-855-81	s	RES, CHIP 47 (1005)
R2539	1-208-855-81	s	RES, CHIP 47 (1005)
R2542	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2543	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2544	1-208-855-81	s	RES, CHIP 47 (1005)
R2545	1-208-855-81	s	RES, CHIP 47 (1005)
R2546	1-208-855-81	s	RES, CHIP 47 (1005)
R2547	1-208-855-81	s	RES, CHIP 47 (1005)
R2548	1-208-911-81	s	RES, CHIP 10K (1005)
R2549	1-208-911-81	s	RES, CHIP 10K (1005)
R2550	1-208-911-81	s	RES, CHIP 10K (1005)
R2551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2552	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2553	1-208-911-81	s	RES, CHIP 10K (1005)
R2554	1-208-911-81	s	RES, CHIP 10K (1005)
R2555	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2556	1-208-911-81	s	RES, CHIP 10K (1005)
R2557	1-208-855-81	s	RES, CHIP 47 (1005)
R2558	1-208-855-81	s	RES, CHIP 47 (1005)
R2559	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2560	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2561	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2562	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2563	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2564	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2565	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2566	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2567	1-208-855-81	s	RES, CHIP 47 (1005)
R2568	1-208-855-81	s	RES, CHIP 47 (1005)
R2569	1-208-863-81	s	RES, CHIP 100 (1005)
R2570	1-208-863-81	s	RES, CHIP 100 (1005)
R2571	1-208-863-81	s	RES, CHIP 100 (1005)
R2572	1-208-863-81	s	RES, CHIP 100 (1005)
R2645	1-208-911-81	s	RES, CHIP 10K (1005)
R2650	1-208-911-81	s	RES, CHIP 10K (1005)
R2651	1-208-911-81	s	RES, CHIP 10K (1005)
R2652	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2653	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2654	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2655	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2656	1-220-870-81	s	RES, CHIP 10 (1005)
R2657	1-220-870-81	s	RES, CHIP 10 (1005)
R2659	1-220-870-81	s	RES, CHIP 10 (1005)
R2660	1-208-901-81	s	RES, CHIP 3.9K (1005)
R2661	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2663	1-208-911-81	s	RES, CHIP 10K (1005)
R2664	1-208-903-81	s	RES, CHIP 4.7K (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2665	1-208-911-81	s	RES, CHIP 10K (1005)
R2666	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2667	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2668	1-208-919-81	s	RES, CHIP 22K (1005)
R2669	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2670	1-208-894-81	s	RES, CHIP 2.0K (1005)
R2671	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2673	1-208-911-81	s	RES, CHIP 10K (1005)
R2674	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2675	1-208-911-81	s	RES, CHIP 10K (1005)
R2676	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2677	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2678	1-208-919-81	s	RES, CHIP 22K (1005)
R2679	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2680	1-208-894-81	s	RES, CHIP 2.0K (1005)
R2681	1-208-855-81	s	RES, CHIP 47 (1005)
R2683	1-208-855-81	s	RES, CHIP 47 (1005)
R2684	1-208-911-81	s	RES, CHIP 10K (1005)
R2685	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2686	1-208-895-81	s	RES, CHIP 2.2K (1005)
R2687	1-208-863-81	s	RES, CHIP 100 (1005)
R2688	1-208-895-81	s	RES, CHIP 2.2K (1005)
R3000	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3002	1-208-863-81	s	RES, CHIP 100 (1005)
R3003	1-208-863-81	s	RES, CHIP 100 (1005)
R3004	1-208-863-81	s	RES, CHIP 100 (1005)
R3005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3006	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3008	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3009	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3010	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3011	1-208-908-81	s	RES, CHIP 7.5K (1005)
R3012	1-208-911-81	s	RES, CHIP 10K (1005)
R3013	1-208-911-81	s	RES, CHIP 10K (1005)
R3014	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3015	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3016	1-208-911-81	s	RES, CHIP 10K (1005)
R3017	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-897-81	s	RES, CHIP 2.7K (1005)
R3019	1-208-897-81	s	RES, CHIP 2.7K (1005)
R3020	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3021	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3022	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3023	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3024	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3026	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3028	1-220-870-81	s	RES, CHIP 10 (1005)
R3029	1-220-870-81	s	RES, CHIP 10 (1005)
R3030	1-220-870-81	s	RES, CHIP 10 (1005)
R3031	1-220-870-81	s	RES, CHIP 10 (1005)
R3032	1-208-855-81	s	RES, CHIP 47 (1005)
R3033	1-208-855-81	s	RES, CHIP 47 (1005)
R3034	1-208-855-81	s	RES, CHIP 47 (1005)
R3036	1-208-911-81	s	RES, CHIP 10K (1005)
R3037	1-208-855-81	s	RES, CHIP 47 (1005)
R3038	1-220-870-81	s	RES, CHIP 10 (1005)
R3039	1-220-870-81	s	RES, CHIP 10 (1005)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
R3040	1-220-870-81	s	RES, CHIP 10 (1005)
R3041	1-220-870-81	s	RES, CHIP 10 (1005)
R3042	1-208-855-81	s	RES, CHIP 47 (1005)
R3043	1-208-855-81	s	RES, CHIP 47 (1005)
R3044	1-208-855-81	s	RES, CHIP 47 (1005)
R3045	1-208-861-81	s	RES, CHIP 82 (1005)
R3046	1-208-861-81	s	RES, CHIP 82 (1005)
R3047	1-208-884-81	s	RES, CHIP 750 (1005)
R3048	1-208-884-81	s	RES, CHIP 750 (1005)
R3049	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3050	1-208-890-81	s	RES, CHIP 1.3K (1005)
R3300	1-208-879-81	s	RES, CHIP 470 (1005)
R3301	1-208-879-81	s	RES, CHIP 470 (1005)
R3302	1-208-879-81	s	RES, CHIP 470 (1005)
R3303	1-208-879-81	s	RES, CHIP 470 (1005)
R3304	1-208-879-81	s	RES, CHIP 470 (1005)
R3306	1-208-879-81	s	RES, CHIP 470 (1005)
R3307	1-208-879-81	s	RES, CHIP 470 (1005)
R3308	1-208-879-81	s	RES, CHIP 470 (1005)
R3313	1-208-863-81	s	RES, CHIP 100 (1005)
R3314	1-208-863-81	s	RES, CHIP 100 (1005)
R3315	1-208-863-81	s	RES, CHIP 100 (1005)
R3316	1-208-863-81	s	RES, CHIP 100 (1005)
R3317	1-208-863-81	s	RES, CHIP 100 (1005)
R3318	1-208-863-81	s	RES, CHIP 100 (1005)
R3319	1-208-863-81	s	RES, CHIP 100 (1005)
R3320	1-208-863-81	s	RES, CHIP 100 (1005)
R3321	1-208-867-81	s	RES, CHIP 150 (1005)
R3322	1-208-867-81	s	RES, CHIP 150 (1005)
R3323	1-208-863-81	s	RES, CHIP 100 (1005)
R3324	1-208-863-81	s	RES, CHIP 100 (1005)
R3325	1-208-867-81	s	RES, CHIP 150 (1005)
R3326	1-208-867-81	s	RES, CHIP 150 (1005)
R3327	1-208-863-81	s	RES, CHIP 100 (1005)
R3328	1-208-867-81	s	RES, CHIP 150 (1005)
R3329	1-208-867-81	s	RES, CHIP 150 (1005)
R3330	1-208-863-81	s	RES, CHIP 100 (1005)
R3331	1-208-863-81	s	RES, CHIP 100 (1005)
RB100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB101	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB104	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB106	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB506	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB507	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB512	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB513	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB514	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB515	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB516	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB517	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB518	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB602	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB901	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB902	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB903	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB904	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB905	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB906	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB907	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB908	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB909	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB910	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB911	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB912	1-234-702-21	s	RES, NETWORK 68 (1005X4)
RB913	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB914	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1102	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1103	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1900	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2003	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2100	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2101	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2102	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2103	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2104	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2105	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2106	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2108	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2109	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2110	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2111	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB2112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2114	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2115	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2116	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2117	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2118	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2200	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2401	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2402	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2403	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2404	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2405	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2406	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2407	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB2408	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2409	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2410	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2411	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2412	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2413	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2414	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2415	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2416	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2417	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2418	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2419	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2420	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2421	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2422	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB2423	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2424	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2425	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2426	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2427	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2428	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2429	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2500	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2501	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2503	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2504	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2505	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2506	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2507	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2508	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB2509	1-234-381-21	s	RES, NETWORK 100K (1005X4)
S501	1-692-270-41	s	SWITCH, SLIDE
S900	1-692-270-41	s	SWITCH, SLIDE
S1400	1-692-270-41	s	SWITCH, SLIDE
S1900	1-692-270-41	s	SWITCH, SLIDE
S2401	1-771-721-21	s	SWITCH, TACTILE
S2402	1-692-270-41	s	SWITCH, SLIDE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP504	1-535-877-22	s	CHIP, CHECKER
TP900	1-535-877-22	s	CHIP, CHECKER
TP901	1-535-877-22	s	CHIP, CHECKER
TP902	1-535-877-22	s	CHIP, CHECKER
TP903	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1900	1-535-877-22	s	CHIP, CHECKER
TP1901	1-535-877-22	s	CHIP, CHECKER
TP1902	1-535-877-22	s	CHIP, CHECKER
TP1903	1-535-877-22	s	CHIP, CHECKER
TP2100	1-535-877-22	s	CHIP, CHECKER
TP2101	1-535-877-22	s	CHIP, CHECKER

(HIF-56 BOARD (SUFFIX 12))

Ref. No. or Q'ty	Part No.	SP	Description
TP2200	1-535-877-22	s	CHIP, CHECKER
TP2201	1-535-877-22	s	CHIP, CHECKER
TP2300	1-535-877-22	s	CHIP, CHECKER
TP2301	1-535-877-22	s	CHIP, CHECKER
TP2302	1-535-877-22	s	CHIP, CHECKER
TP2303	1-535-877-22	s	CHIP, CHECKER
TP2401	1-535-877-22	s	CHIP, CHECKER
TP2402	1-535-877-22	s	CHIP, CHECKER
TP2403	1-535-877-22	s	CHIP, CHECKER
TP2404	1-535-877-22	s	CHIP, CHECKER
X400	1-795-670-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X401	1-814-184-11	s	OSCILLATOR, CRYSTAL
X402	1-814-185-11	s	OSCILLATOR, CRYSTAL
X403	1-795-671-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X404	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V
X405	1-813-003-12	s	OSCILLATOR, CRYSTAL (VCXO)3.3V

HN-268 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8324-941-A	o	MOUNTED CIRCUIT BOARD, HN-268
CN216	1-564-010-11	s	PIN, CONNECTOR 11P
CN230	1-564-002-11	s	PIN, CONNECTOR 3P
CN231	1-564-001-11	o	PIN, CONNECTOR 2P
CN232	1-564-001-21	s	PIN, CONNECTOR 2P
CN233	1-564-004-11	o	PIN, CONNECTOR 5P

HP-135 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C2	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C3	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C4	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C5	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C6	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C7	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C8	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C9	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C10	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C11	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C12	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C13	1-115-155-21	s	CAP, ELECT 22MF
C14	1-115-155-21	s	CAP, ELECT 22MF
C15	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C16	1-162-923-91	s	CAP, CERAMIC 47PF CH 1608
C17	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C18	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C19	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C20	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C21	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C22	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
CN1	1-565-326-12	s	JACK, LARGE TYPE 1P
CN2	1-695-209-21	s	PIN, CONNECTOR (PC BOARD) 15P
CN3	1-794-225-11	o	CONNECTOR, BOARD TO BOARD 40P
CN4	1-766-376-21	o	PIN, CONNECTOR (1.5MM)(SMD) 9P
CN5	1-750-635-21	o	PIN, CONNECTOR (PC BOARD) 5P
D1	8-719-017-01	s	DIODE 02DZ4.3-TPH3
D2	8-719-801-50	s	DIODE 1SS193-TE85L
F1	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
IC1	8-759-394-74	s	IC NJM4580E-D-TE2
IC2	8-759-394-74	s	IC NJM4580E-D-TE2
IC3	8-759-394-77	s	IC NJM5534M(TE2)
IC4	8-759-394-77	s	IC NJM5534M(TE2)
IC5	8-759-394-77	s	IC NJM5534M(TE2)
IC6	8-759-394-77	s	IC NJM5534M(TE2)
Q1	8-729-102-94	s	TRANSISTOR 2SD596-T1DV5
R1	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R2	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R3	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R4	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R5	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R6	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R7	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R8	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R9	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R10	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R11	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R12	1-245-896-11	s	RES, METAL FILM(SMD)100K(1608)
R13	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R14	1-245-720-11	s	RES, METAL FILM(SMD) 10 (1608)
R15	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R16	1-245-818-11	s	RES, METAL FILM(SMD)2.7K(1608)
R17	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R18	1-245-852-11	s	RES, METAL FILM(SMD) 10K(1608)
R19	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)

(HP-135 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R20	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R21	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R22	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
R23	1-218-818-91	s	RES,SQUARE TYPE CHIP 220(4532)
R24	1-218-818-91	s	RES,SQUARE TYPE CHIP 220(4532)
R25	1-218-818-91	s	RES,SQUARE TYPE CHIP 220(4532)
R26	1-218-818-91	s	RES,SQUARE TYPE CHIP 220(4532)
R27	1-245-808-11	s	RES, METAL FILM(SMD) 1K (1608)
RV1	1-227-177-11	s	POTENTIOMETER 20K
RY1	1-755-379-21	s	RELAY

HPR-22 BOARD
---

*a: For suffix 11
*b: For suffix 12

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-735-A	s	MOUNTED CIRCUIT BOARD, BOARD, HPR-22 COMPLETE
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C1	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C2	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C3	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C4	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C5	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C6	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C7	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C8	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C22	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C23	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C25	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C26	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C30	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C33	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C34	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C35	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C36	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C39	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C40	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C41	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C42	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C51	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C52	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C54	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C55	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C58	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C59	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C203	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C323	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C325	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C329	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C331	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C332	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C402	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C405	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C410	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C502	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C503	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C518	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C523	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C524	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C527	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C530	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C533	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C536	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C543	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C544	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C548	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C549	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C550	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C555	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C557	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C559	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C560	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C562	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C570	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C571	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C572	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C573	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C574	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C576	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C578	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C580	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C581	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C582	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C583	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C584	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C585	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C586	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C587	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C588	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C589	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C590	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C591	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C592	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C593	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C594	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C595	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C596	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C597	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C598	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C599	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C606	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C610	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C629	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C630	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C631	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C632	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C633	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C634	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C635	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C636	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C637	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C638	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C639	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C640	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C641	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C642	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C643	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C644	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C645	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C646	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C647	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C648	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C702	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C703	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C704	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C709	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C712	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C713	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C714	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C715	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C806	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C929	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C930	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C1117	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C1118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1202	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1205	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1208	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1210	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1213	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1214	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1217	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1219	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1223	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1225	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1226	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1234	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C1238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1242	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1243	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1248	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1249	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1251	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1252 *a	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1253	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1258	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1260	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1261	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1262	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1263	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1265	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1267	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1272	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1274	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1275	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1276	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1277	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1279	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1281	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1283	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1285	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1286 *a	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1287	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1289	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1294	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1296	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1297	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1298	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1299	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1301	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1312	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1313	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1315	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1323	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1324	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1325	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1326	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1327	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1328	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1329	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1330	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1331	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1332	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1333	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1334	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1335	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1316 *a	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319 *a	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320 *a	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1321 *a	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322 *a	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1336	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1337	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1338	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1339	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1340	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1341	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1342	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1343	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1344	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1345	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1346	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1347	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1349	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1401	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1406	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN102	1-815-660-91	s	CONNECTOR, BOARD TO BOARD 60P
CN300	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D21	8-719-066-98	s	DIODE RB051L-40TE25
D22	8-719-071-34	s	DIODE RB521S-30-TE61
D23	8-719-071-34	s	DIODE RB521S-30-TE61
D24	8-719-066-98	s	DIODE RB051L-40TE25
D401	8-719-077-09	s	DIODE CL-196HR-CD-T
D402	8-719-074-31	s	DIODE CL-196YG-CD-T
D701	8-719-074-31	s	DIODE CL-196YG-CD-T
D702	8-719-077-09	s	DIODE CL-196HR-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
E15	1-535-877-22	s	CHIP, CHECKER
E16	1-535-877-22	s	CHIP, CHECKER
E1401	1-535-877-22	s	CHIP, CHECKER
F1 ⚠	1-533-627-21	s	FUSE (SMD) (5A/125V)
F2 ⚠	1-533-627-21	s	FUSE (SMD) (5A/125V)
F3 ⚠	1-533-804-21	s	FUSE (SMD) (2.5A/125V)
FB51	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB52	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB53	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB54	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB55	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB502	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB505	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB506	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB507	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB508	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB509	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB510	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB511	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB512	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB513	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB514	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1201	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1203	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1204	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB1205	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1206	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1207	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1208	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1209	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1210	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1211	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1212	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1213	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1214	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1215	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1501	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC21	8-759-597-57	s	IC LTC1628CG#TR
IC22	8-759-598-35	s	IC NJM2119M(TE2)
IC201	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-700-763-01	s	IC DS90CR287MTDX
IC701	6-700-764-01	s	IC DS90CR288AMTDX
IC801	6-700-804-01	s	IC SN74LVC574APWR
IC802	8-759-475-60	s	IC TC74LCX16374AFT(EL)
IC803	8-759-475-60	s	IC TC74LCX16374AFT(EL)
IC804	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1101	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1102	6-707-456-01	s	IC MT46V16M16P-6T-T26A
IC1202	8-759-683-80	s	IC SN65LVDS1DBVR
IC1403	8-759-675-47	s	IC SN74LVC04APWR
IC1404	8-759-669-41	s	IC SN74LVC125APWR-12
IC1405	8-759-669-43	s	IC SN74LVC157APWR-12
IC1406	8-759-573-97	s	IC SN74LVC541APWR
IC1407	8-759-669-43	s	IC SN74LVC157APWR-12
IC1408	8-759-573-97	s	IC SN74LVC541APWR
IC1409	6-710-605-01	s	IC MAX1617AMEE+TG069
IC1410	6-710-605-01	s	IC MAX1617AMEE+TG069
IC1510	8-759-679-57	s	IC SN74LVC00APWR
IC1511	8-759-573-97	s	IC SN74LVC541APWR
IC1512	8-759-573-97	s	IC SN74LVC541APWR
IC1513	8-759-573-97	s	IC SN74LVC541APWR
IC1514	8-759-392-77	s	IC SN74LVC245APWR
IC1516	8-759-392-77	s	IC SN74LVC245APWR
IC1517	6-708-538-01	s	IC CDCVF2510APWR
IC1518	8-759-573-97	s	IC SN74LVC541APWR
IC1519	8-759-573-97	s	IC SN74LVC541APWR
IC1520	8-759-392-77	s	IC SN74LVC245APWR
IC1521	8-759-573-97	s	IC SN74LVC541APWR
IC1601	6-700-804-01	s	IC SN74LVC574APWR
IC1602	6-700-804-01	s	IC SN74LVC574APWR
IC1603	8-759-547-50	s	IC CDC516DGGR
IC1604	8-759-689-09	s	IC SN65LVDT2DBVR
IC1605	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC1606	6-700-804-01	s	IC SN74LVC574APWR
IC1607	8-759-573-97	s	IC SN74LVC541APWR
IC1608	8-759-683-80	s	IC SN65LVDS1DBVR
L1	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L2	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L3	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L4	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L5	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L21	1-400-161-21	s	INDUCTOR 1.2UH

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L22	1-400-161-21	s	INDUCTOR 1.2UH
L23	1-419-491-21	s	COIL, CHOKE 10UH
L24	1-419-491-21	s	COIL, CHOKE 10UH
Q21	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q22	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q23	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q24	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q25	6-550-750-01	s	TRANSISTOR SSM3K15FS-TE85L
Q26	6-550-750-01	s	TRANSISTOR SSM3K15FS-TE85L
Q27	8-729-928-91	s	TRANSISTOR DTC114EE-TL
R21	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R22	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R23	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R24	1-218-446-91	s	RES, CHIP 1 (1608)
R25	1-218-446-91	s	RES, CHIP 1 (1608)
R26	1-208-903-81	s	RES, CHIP 4.7K (1005)
R27	1-208-903-81	s	RES, CHIP 4.7K (1005)
R28	1-208-879-81	s	RES, CHIP 470 (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-903-81	s	RES, CHIP 4.7K (1005)
R31	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R32	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R34	1-208-935-81	s	RES, CHIP 100K (1005)
R35	1-208-903-81	s	RES, CHIP 4.7K (1005)
R36	1-208-879-81	s	RES, CHIP 470 (1005)
R37	1-208-903-81	s	RES, CHIP 4.7K (1005)
R38	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-218-446-91	s	RES, CHIP 1 (1608)
R41	1-218-446-91	s	RES, CHIP 1 (1608)
R42	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R43	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R44	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R51	1-208-911-81	s	RES, CHIP 10K (1005)
R52	1-208-911-81	s	RES, CHIP 10K (1005)
R53	1-211-969-91	s	RES, CHIP 10 (1608)
R54	1-211-969-91	s	RES, CHIP 10 (1608)
R55	1-208-935-81	s	RES, CHIP 100K (1005)
R56	1-208-935-81	s	RES, CHIP 100K (1005)
R57	1-208-911-81	s	RES, CHIP 10K (1005)
R58	1-208-863-81	s	RES, CHIP 100 (1005)
R59	1-208-863-81	s	RES, CHIP 100 (1005)
R201	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R202	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R203	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R205	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R209	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R210	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R211	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R212	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R214	1-208-903-81	s	RES, CHIP 4.7K (1005)
R215	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R216	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R217	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R219	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R220	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R222	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R223	1-208-903-81	s	RES, CHIP 4.7K (1005)
R224	1-208-903-81	s	RES, CHIP 4.7K (1005)
R225	1-208-903-81	s	RES, CHIP 4.7K (1005)
R226	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R227	1-208-903-81	s	RES, CHIP 4.7K (1005)
R228	1-208-903-81	s	RES, CHIP 4.7K (1005)
R229	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R230	1-208-903-81	s	RES, CHIP 4.7K (1005)
R301	1-208-903-81	s	RES, CHIP 4.7K (1005)
R302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R303	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R304	1-208-903-81	s	RES, CHIP 4.7K (1005)
R305	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R307	1-208-903-81	s	RES, CHIP 4.7K (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-208-903-81	s	RES, CHIP 4.7K (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-208-863-81	s	RES, CHIP 100 (1005)
R402	1-208-863-81	s	RES, CHIP 100 (1005)
R403	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R405	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R406	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R413	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R414	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R415	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R416	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R417	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R419	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R426	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R427	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	*b 1-218-990-81	s	CONDUCTOR, CHIP (1005)
R501	1-208-855-81	s	RES, CHIP 47 (1005)
R502	1-208-855-81	s	RES, CHIP 47 (1005)
R503	1-208-855-81	s	RES, CHIP 47 (1005)
R504	1-208-855-81	s	RES, CHIP 47 (1005)
R505	1-220-870-81	s	RES, CHIP 10 (1005)
R506	1-220-870-81	s	RES, CHIP 10 (1005)
R507	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R508	1-208-887-81	s	RES, CHIP 1.0K (1005)
R509	1-208-887-81	s	RES, CHIP 1.0K (1005)
R510	1-208-887-81	s	RES, CHIP 1.0K (1005)
R511	1-208-887-81	s	RES, CHIP 1.0K (1005)
R512	1-208-887-81	s	RES, CHIP 1.0K (1005)
R513	1-208-887-81	s	RES, CHIP 1.0K (1005)
R514	1-208-887-81	s	RES, CHIP 1.0K (1005)
R515	1-208-887-81	s	RES, CHIP 1.0K (1005)
R516	1-208-887-81	s	RES, CHIP 1.0K (1005)
R517	1-208-887-81	s	RES, CHIP 1.0K (1005)
R518	1-208-887-81	s	RES, CHIP 1.0K (1005)
R519	1-208-887-81	s	RES, CHIP 1.0K (1005)
R520	1-208-887-81	s	RES, CHIP 1.0K (1005)
R521	1-208-887-81	s	RES, CHIP 1.0K (1005)
R522	1-208-887-81	s	RES, CHIP 1.0K (1005)
R523	1-208-887-81	s	RES, CHIP 1.0K (1005)
R524	1-208-887-81	s	RES, CHIP 1.0K (1005)
R525	1-208-887-81	s	RES, CHIP 1.0K (1005)
R526	1-208-887-81	s	RES, CHIP 1.0K (1005)
R527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R528	1-208-887-81	s	RES, CHIP 1.0K (1005)
R529	1-208-887-81	s	RES, CHIP 1.0K (1005)
R530	1-208-887-81	s	RES, CHIP 1.0K (1005)
R531	1-208-887-81	s	RES, CHIP 1.0K (1005)
R532	1-208-887-81	s	RES, CHIP 1.0K (1005)
R533	1-208-887-81	s	RES, CHIP 1.0K (1005)
R534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R535	1-208-887-81	s	RES, CHIP 1.0K (1005)
R536	1-208-887-81	s	RES, CHIP 1.0K (1005)
R537	1-208-887-81	s	RES, CHIP 1.0K (1005)
R538	1-208-887-81	s	RES, CHIP 1.0K (1005)
R539	1-208-887-81	s	RES, CHIP 1.0K (1005)
R540	1-208-887-81	s	RES, CHIP 1.0K (1005)
R541	1-208-887-81	s	RES, CHIP 1.0K (1005)
R542	1-208-887-81	s	RES, CHIP 1.0K (1005)
R543	1-208-887-81	s	RES, CHIP 1.0K (1005)
R544	1-208-887-81	s	RES, CHIP 1.0K (1005)
R545	1-208-887-81	s	RES, CHIP 1.0K (1005)
R546	1-208-887-81	s	RES, CHIP 1.0K (1005)
R547	1-208-887-81	s	RES, CHIP 1.0K (1005)
R548	1-208-887-81	s	RES, CHIP 1.0K (1005)
R549	1-208-887-81	s	RES, CHIP 1.0K (1005)
R550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R552	1-208-887-81	s	RES, CHIP 1.0K (1005)
R553	1-208-887-81	s	RES, CHIP 1.0K (1005)
R554	1-208-887-81	s	RES, CHIP 1.0K (1005)
R555	1-208-887-81	s	RES, CHIP 1.0K (1005)
R556	1-208-887-81	s	RES, CHIP 1.0K (1005)
R557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R559	1-208-887-81	s	RES, CHIP 1.0K (1005)
R560	1-208-887-81	s	RES, CHIP 1.0K (1005)
R561	1-208-887-81	s	RES, CHIP 1.0K (1005)
R562	1-208-887-81	s	RES, CHIP 1.0K (1005)
R563	1-208-887-81	s	RES, CHIP 1.0K (1005)
R564	1-208-887-81	s	RES, CHIP 1.0K (1005)
R572	1-208-911-81	s	RES, CHIP 10K (1005)
R573	1-208-911-81	s	RES, CHIP 10K (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R574	1-208-887-81	s	RES, CHIP 1.0K (1005)
R575	1-208-911-81	s	RES, CHIP 10K (1005)
R576	1-208-911-81	s	RES, CHIP 10K (1005)
R577	1-208-911-81	s	RES, CHIP 10K (1005)
R578	1-208-911-81	s	RES, CHIP 10K (1005)
R580	1-208-911-81	s	RES, CHIP 10K (1005)
R701	1-208-911-81	s	RES, CHIP 10K (1005)
R702	1-208-863-81	s	RES, CHIP 100 (1005)
R703	1-208-863-81	s	RES, CHIP 100 (1005)
R704	1-208-863-81	s	RES, CHIP 100 (1005)
R705	1-208-863-81	s	RES, CHIP 100 (1005)
R706	1-208-863-81	s	RES, CHIP 100 (1005)
R707	1-220-882-81	s	RES, CHIP 33 (1005)
R708	1-208-863-81	s	RES, CHIP 100 (1005)
R709	1-208-863-81	s	RES, CHIP 100 (1005)
R710	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R711	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R712	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R713	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R801	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-208-903-81	s	RES, CHIP 4.7K (1005)
R812	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R813	1-208-903-81	s	RES, CHIP 4.7K (1005)
R814	1-208-903-81	s	RES, CHIP 4.7K (1005)
R815	1-208-903-81	s	RES, CHIP 4.7K (1005)
R816	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R817	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R818	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R819	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R820	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R821	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R822	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R823	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R824	1-208-903-81	s	RES, CHIP 4.7K (1005)
R825	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R826	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R827	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R828	1-208-903-81	s	RES, CHIP 4.7K (1005)
R829	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R830	1-208-903-81	s	RES, CHIP 4.7K (1005)
R831	1-208-903-81	s	RES, CHIP 4.7K (1005)
R901	1-208-903-81	s	RES, CHIP 4.7K (1005)
R902	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R903	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R904	1-208-903-81	s	RES, CHIP 4.7K (1005)
R905	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R906	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R907	1-208-903-81	s	RES, CHIP 4.7K (1005)
R908	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R909	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R910	1-208-903-81	s	RES, CHIP 4.7K (1005)
R911	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R912	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1007	1-208-860-81	s	RES, CHIP 75 (1005)
R1008	1-208-860-81	s	RES, CHIP 75 (1005)
R1009	1-208-860-81	s	RES, CHIP 75 (1005)
R1010	1-208-860-81	s	RES, CHIP 75 (1005)
R1011	1-208-860-81	s	RES, CHIP 75 (1005)
R1012	1-208-860-81	s	RES, CHIP 75 (1005)
R1101	1-220-882-81	s	RES, CHIP 33 (1005)
R1102	1-208-857-81	s	RES, CHIP 56 (1005)
R1104	1-220-882-81	s	RES, CHIP 33 (1005)
R1105	1-208-857-81	s	RES, CHIP 56 (1005)
R1106	1-208-857-81	s	RES, CHIP 56 (1005)
R1107	1-208-857-81	s	RES, CHIP 56 (1005)
R1108	1-208-857-81	s	RES, CHIP 56 (1005)
R1109	1-208-857-81	s	RES, CHIP 56 (1005)
R1110	1-208-857-81	s	RES, CHIP 56 (1005)
R1111	1-208-857-81	s	RES, CHIP 56 (1005)
R1112	1-208-857-81	s	RES, CHIP 56 (1005)
R1113	1-208-857-81	s	RES, CHIP 56 (1005)
R1114	1-208-857-81	s	RES, CHIP 56 (1005)
R1115	1-208-857-81	s	RES, CHIP 56 (1005)
R1116	1-208-857-81	s	RES, CHIP 56 (1005)
R1117	1-208-857-81	s	RES, CHIP 56 (1005)
R1118	1-208-857-81	s	RES, CHIP 56 (1005)
R1119	1-208-857-81	s	RES, CHIP 56 (1005)
R1120	1-208-857-81	s	RES, CHIP 56 (1005)
R1121	1-208-857-81	s	RES, CHIP 56 (1005)
R1122	1-208-857-81	s	RES, CHIP 56 (1005)
R1123	1-208-857-81	s	RES, CHIP 56 (1005)
R1124	1-208-857-81	s	RES, CHIP 56 (1005)
R1125	1-220-878-81	s	RES, CHIP 22 (1005)
R1126	1-220-878-81	s	RES, CHIP 22 (1005)
R1128	1-220-882-81	s	RES, CHIP 33 (1005)
R1131	1-220-882-81	s	RES, CHIP 33 (1005)
R1132	1-208-863-81	s	RES, CHIP 100 (1005)
R1144	1-208-857-81	s	RES, CHIP 56 (1005)
R1145	1-208-857-81	s	RES, CHIP 56 (1005)
R1146	1-208-857-81	s	RES, CHIP 56 (1005)
R1147	1-208-857-81	s	RES, CHIP 56 (1005)
R1148	1-208-857-81	s	RES, CHIP 56 (1005)
R1149	1-208-857-81	s	RES, CHIP 56 (1005)
R1150	1-208-857-81	s	RES, CHIP 56 (1005)
R1151	1-208-857-81	s	RES, CHIP 56 (1005)
R1152	1-208-857-81	s	RES, CHIP 56 (1005)
R1153	1-208-857-81	s	RES, CHIP 56 (1005)
R1154	1-208-857-81	s	RES, CHIP 56 (1005)
R1155	1-208-857-81	s	RES, CHIP 56 (1005)
R1156	1-208-857-81	s	RES, CHIP 56 (1005)
R1157	1-208-857-81	s	RES, CHIP 56 (1005)
R1158	1-208-857-81	s	RES, CHIP 56 (1005)
R1159	1-208-857-81	s	RES, CHIP 56 (1005)
R1160	1-208-857-81	s	RES, CHIP 56 (1005)
R1161	1-208-857-81	s	RES, CHIP 56 (1005)
R1162	1-208-857-81	s	RES, CHIP 56 (1005)
R1163	1-208-857-81	s	RES, CHIP 56 (1005)
R1164	1-208-857-81	s	RES, CHIP 56 (1005)
R1165	1-208-857-81	s	RES, CHIP 56 (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1166	1-208-857-81	s	RES, CHIP 56 (1005)
R1167	1-208-857-81	s	RES, CHIP 56 (1005)
R1168	1-208-857-81	s	RES, CHIP 56 (1005)
R1169	1-208-857-81	s	RES, CHIP 56 (1005)
R1170	1-208-857-81	s	RES, CHIP 56 (1005)
R1171	1-208-857-81	s	RES, CHIP 56 (1005)
R1172	1-208-857-81	s	RES, CHIP 56 (1005)
R1173	1-208-857-81	s	RES, CHIP 56 (1005)
R1174	1-208-857-81	s	RES, CHIP 56 (1005)
R1175	1-208-857-81	s	RES, CHIP 56 (1005)
R1176	1-208-935-81	s	RES, CHIP 100K (1005)
R1177	1-208-935-81	s	RES, CHIP 100K (1005)
R1178	1-208-857-81	s	RES, CHIP 56 (1005)
R1179	1-208-857-81	s	RES, CHIP 56 (1005)
R1180	1-208-857-81	s	RES, CHIP 56 (1005)
R1181	1-208-857-81	s	RES, CHIP 56 (1005)
R1182	1-208-857-81	s	RES, CHIP 56 (1005)
R1183	1-208-857-81	s	RES, CHIP 56 (1005)
R1184	1-208-857-81	s	RES, CHIP 56 (1005)
R1185	1-208-857-81	s	RES, CHIP 56 (1005)
R1186	1-208-857-81	s	RES, CHIP 56 (1005)
R1187	1-208-857-81	s	RES, CHIP 56 (1005)
R1188	1-208-857-81	s	RES, CHIP 56 (1005)
R1189	1-208-857-81	s	RES, CHIP 56 (1005)
R1190	1-208-857-81	s	RES, CHIP 56 (1005)
R1191	1-208-857-81	s	RES, CHIP 56 (1005)
R1192	1-208-857-81	s	RES, CHIP 56 (1005)
R1193	1-208-857-81	s	RES, CHIP 56 (1005)
R1194	1-208-857-81	s	RES, CHIP 56 (1005)
R1195	1-208-857-81	s	RES, CHIP 56 (1005)
R1196	1-208-857-81	s	RES, CHIP 56 (1005)
R1197	1-220-882-81	s	RES, CHIP 33 (1005)
R1198	1-220-882-81	s	RES, CHIP 33 (1005)
R1199	1-220-882-81	s	RES, CHIP 33 (1005)
R1200	1-220-882-81	s	RES, CHIP 33 (1005)
R1201	1-208-855-81	s	RES, CHIP 47 (1005)
R1202	1-208-855-81	s	RES, CHIP 47 (1005)
R1203	1-220-870-81	s	RES, CHIP 10 (1005)
R1204	1-220-870-81	s	RES, CHIP 10 (1005)
R1205	1-220-870-81	s	RES, CHIP 10 (1005)
R1206	1-208-863-81	s	RES, CHIP 100 (1005)
R1207	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1208	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1209	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1210	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1211	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1212	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1213	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1214	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1215	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1216	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1217	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1218	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1219	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1220	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1221	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1222	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1223	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1224	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1225	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1226	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1227	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1228	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1229	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1230	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1233	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1234	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1235	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1236	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1237	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1238	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1239	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1240	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1243	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1244	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1245	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1247	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1248	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1249	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1250	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1251	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1252	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1253	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1254	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1255	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1256	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1257	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1258	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1259	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1260	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1261	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1262	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1263	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1271	1-208-911-81	s	RES, CHIP 10K (1005)
R1272	1-208-911-81	s	RES, CHIP 10K (1005)
R1273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1274	1-208-911-81	s	RES, CHIP 10K (1005)
R1275	1-208-911-81	s	RES, CHIP 10K (1005)
R1276	1-208-911-81	s	RES, CHIP 10K (1005)
R1277	1-208-911-81	s	RES, CHIP 10K (1005)
R1278	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1279	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1283	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1291	1-208-911-81	s	RES, CHIP 10K (1005)
R1296	1-208-855-81	s	RES, CHIP 47 (1005)
R1297	1-208-855-81	s	RES, CHIP 47 (1005)
R1300	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1301	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1302	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1401	1-208-911-81	s	RES, CHIP 10K (1005)
R1402	1-208-911-81	s	RES, CHIP 10K (1005)
R1403	1-208-911-81	s	RES, CHIP 10K (1005)
R1404	1-208-871-81	s	RES, CHIP 220 (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1405	1-208-911-81	s	RES, CHIP 10K (1005)
R1406	1-208-911-81	s	RES, CHIP 10K (1005)
R1409	1-208-911-81	s	RES, CHIP 10K (1005)
R1410	1-208-911-81	s	RES, CHIP 10K (1005)
R1411	1-208-911-81	s	RES, CHIP 10K (1005)
R1412	1-208-911-81	s	RES, CHIP 10K (1005)
R1413	1-208-871-81	s	RES, CHIP 220 (1005)
R1414	1-208-911-81	s	RES, CHIP 10K (1005)
R1415	1-208-911-81	s	RES, CHIP 10K (1005)
R1416	1-208-911-81	s	RES, CHIP 10K (1005)
R1418	1-208-911-81	s	RES, CHIP 10K (1005)
R1419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1423	1-220-870-81	s	RES, CHIP 10 (1005)
R1424	1-220-870-81	s	RES, CHIP 10 (1005)
R1425	1-220-870-81	s	RES, CHIP 10 (1005)
R1426	1-220-870-81	s	RES, CHIP 10 (1005)
R1427	1-220-870-81	s	RES, CHIP 10 (1005)
R1428	1-208-911-81	s	RES, CHIP 10K (1005)
R1429	1-208-911-81	s	RES, CHIP 10K (1005)
R1430	1-208-911-81	s	RES, CHIP 10K (1005)
R1431	1-208-911-81	s	RES, CHIP 10K (1005)
R1432	1-208-911-81	s	RES, CHIP 10K (1005)
R1433	1-208-911-81	s	RES, CHIP 10K (1005)
R1435	1-208-911-81	s	RES, CHIP 10K (1005)
R1436	1-208-911-81	s	RES, CHIP 10K (1005)
R1437	1-220-870-81	s	RES, CHIP 10 (1005)
R1438	1-220-870-81	s	RES, CHIP 10 (1005)
R1439	1-220-870-81	s	RES, CHIP 10 (1005)
R1440	1-220-870-81	s	RES, CHIP 10 (1005)
R1441	1-220-870-81	s	RES, CHIP 10 (1005)
R1442	1-208-863-81	s	RES, CHIP 100 (1005)
R1443	1-208-863-81	s	RES, CHIP 100 (1005)
R1444	1-208-863-81	s	RES, CHIP 100 (1005)
R1445	1-208-863-81	s	RES, CHIP 100 (1005)
R1446	1-220-870-81	s	RES, CHIP 10 (1005)
R1448	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1449	1-220-870-81	s	RES, CHIP 10 (1005)
R1450	1-208-855-81	s	RES, CHIP 47 (1005)
R1451	1-208-855-81	s	RES, CHIP 47 (1005)
R1452 *b	1-208-911-81	s	RES, CHIP 10K (1005)
R1453 *b	1-208-911-81	s	RES, CHIP 10K (1005)
R1502	1-208-935-81	s	RES, CHIP 100K (1005)
R1503	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1504	1-208-911-81	s	RES, CHIP 10K (1005)
R1505	1-208-935-81	s	RES, CHIP 100K (1005)
R1506	1-208-935-81	s	RES, CHIP 100K (1005)
R1507	1-208-863-81	s	RES, CHIP 100 (1005)
R1508	1-208-863-81	s	RES, CHIP 100 (1005)
R1509	1-208-855-81	s	RES, CHIP 47 (1005)
R1510	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1511	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1513	1-208-855-81	s	RES, CHIP 47 (1005)
R1514	1-208-855-81	s	RES, CHIP 47 (1005)
R1515	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1516	1-220-870-81	s	RES, CHIP 10 (1005)
R1517	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1518	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1519	1-220-878-81	s	RES, CHIP 22 (1005)
R1520	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1521	1-220-878-81	s	RES, CHIP 22 (1005)
R1522	1-220-878-81	s	RES, CHIP 22 (1005)
R1523	1-220-878-81	s	RES, CHIP 22 (1005)
R1524	1-220-878-81	s	RES, CHIP 22 (1005)
R1525	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1526	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1527	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1528	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1529 *a	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1530	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1532	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1533	1-220-870-81	s	RES, CHIP 10 (1005)
R1534	1-220-870-81	s	RES, CHIP 10 (1005)
R1535	1-220-870-81	s	RES, CHIP 10 (1005)
R1536	1-220-870-81	s	RES, CHIP 10 (1005)
R1537	1-220-870-81	s	RES, CHIP 10 (1005)
R1538	1-220-870-81	s	RES, CHIP 10 (1005)
R1539	1-220-870-81	s	RES, CHIP 10 (1005)
R1540	1-220-870-81	s	RES, CHIP 10 (1005)
R1541	1-220-870-81	s	RES, CHIP 10 (1005)
R1542	1-220-870-81	s	RES, CHIP 10 (1005)
R1543	1-220-870-81	s	RES, CHIP 10 (1005)
R1544	1-220-870-81	s	RES, CHIP 10 (1005)
R1545	1-220-870-81	s	RES, CHIP 10 (1005)
R1546	1-220-870-81	s	RES, CHIP 10 (1005)
R1547	1-220-870-81	s	RES, CHIP 10 (1005)
R1548	1-220-870-81	s	RES, CHIP 10 (1005)
R1549	1-220-870-81	s	RES, CHIP 10 (1005)
R1550	1-220-870-81	s	RES, CHIP 10 (1005)
R1551	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1552	1-220-870-81	s	RES, CHIP 10 (1005)
R1553	1-220-870-81	s	RES, CHIP 10 (1005)
R1554	1-220-870-81	s	RES, CHIP 10 (1005)
R1555	1-220-870-81	s	RES, CHIP 10 (1005)
R1556	1-220-870-81	s	RES, CHIP 10 (1005)
R1557	1-220-870-81	s	RES, CHIP 10 (1005)
R1558	1-220-870-81	s	RES, CHIP 10 (1005)
R1559	1-220-870-81	s	RES, CHIP 10 (1005)
R1560	1-220-870-81	s	RES, CHIP 10 (1005)
R1561	1-220-870-81	s	RES, CHIP 10 (1005)
R1562	1-208-911-81	s	RES, CHIP 10K (1005)
R1563	1-208-911-81	s	RES, CHIP 10K (1005)
R1564	1-208-911-81	s	RES, CHIP 10K (1005)
R1565	1-208-863-81	s	RES, CHIP 100 (1005)
R1566	1-208-863-81	s	RES, CHIP 100 (1005)
R1567	1-208-863-81	s	RES, CHIP 100 (1005)
R1568	1-208-863-81	s	RES, CHIP 100 (1005)
R1569	1-220-870-81	s	RES, CHIP 10 (1005)
R1570	1-208-911-81	s	RES, CHIP 10K (1005)
R1571 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1572 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1573 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1601	1-208-911-81	s	RES, CHIP 10K (1005)
R1602	1-208-911-81	s	RES, CHIP 10K (1005)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1603	1-208-911-81	s	RES, CHIP 10K (1005)
R1604	1-208-911-81	s	RES, CHIP 10K (1005)
R1605	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-220-878-81	s	RES, CHIP 22 (1005)
R1608	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1609	1-208-855-81	s	RES, CHIP 47 (1005)
R1610	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1611	1-208-855-81	s	RES, CHIP 47 (1005)
R1612	1-208-855-81	s	RES, CHIP 47 (1005)
R1613	1-208-855-81	s	RES, CHIP 47 (1005)
R1614	1-208-855-81	s	RES, CHIP 47 (1005)
R1615	1-208-855-81	s	RES, CHIP 47 (1005)
R1616	1-208-855-81	s	RES, CHIP 47 (1005)
R1617	1-208-855-81	s	RES, CHIP 47 (1005)
R1618	1-208-855-81	s	RES, CHIP 47 (1005)
R1619	1-208-855-81	s	RES, CHIP 47 (1005)
R1620	1-208-855-81	s	RES, CHIP 47 (1005)
R1621	1-208-855-81	s	RES, CHIP 47 (1005)
R1622	1-208-855-81	s	RES, CHIP 47 (1005)
R1623	1-208-855-81	s	RES, CHIP 47 (1005)
R1624	1-208-855-81	s	RES, CHIP 47 (1005)
R1625	1-208-855-81	s	RES, CHIP 47 (1005)
R1626	1-208-855-81	s	RES, CHIP 47 (1005)
RB401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB701	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB803	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB804	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB805	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB806	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB807	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB808	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB809	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB810	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1501	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1502	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1503	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1504	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1505	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1506	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1507	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB1508	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1509	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1510	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1511	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1512	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1513	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1514	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1515	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1516	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1517	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1518	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1519	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1520	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1521	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1522	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1523	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(HPR-22 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1524	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1525	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1526	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1527	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1601	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1602	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1603	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1604	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1605	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1606	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1607	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1608	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1610	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1611	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1612	1-234-371-21	s	RES, NETWORK 47 (1005X4)
S101	1-692-270-41	s	SWITCH, SLIDE
S102	1-692-270-41	s	SWITCH, SLIDE
S104	1-692-270-41	s	SWITCH, SLIDE
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP403	1-535-877-22	s	CHIP, CHECKER
TP404	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP702	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP1601	1-535-877-22	s	CHIP, CHECKER
TP1602	1-535-877-22	s	CHIP, CHECKER

HPR-35 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1768-613-A	s	MOUNTED CIRCUIT BOARD, HPR-35
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C1	1-116-116-11	s	CAP, ELECT 220MF 105
C2	1-116-116-11	s	CAP, ELECT 220MF 105
C3	1-116-099-11	s	CAP, ELECT 100MF 105
C4	1-116-099-11	s	CAP, ELECT 100MF 105
C5	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C6	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C7	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C8	1-116-105-11	s	CAP, ELECT 68MF 105
C9	1-116-099-11	s	CAP, ELECT 100MF 105
C10	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C11	1-116-099-11	s	CAP, ELECT 100MF 105
C12	1-116-105-11	s	CAP, ELECT 68MF 105
C13	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C14	1-116-118-11	s	CAP, ELECT 47MF 105
C15	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C16	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C18	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C20	1-116-116-11	s	CAP, ELECT 220MF 105
C21	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C22	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C23	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C24	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C25	1-116-099-11	s	CAP, ELECT 100MF 105
C26	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C27	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C28	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C29	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C30	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C31	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C32	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C35	1-116-118-11	s	CAP, ELECT 47MF 105
C36	1-116-103-11	s	CAP, ELECT 470MF 105
C39	1-116-099-11	s	CAP, ELECT 100MF 105
C41	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C43	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C44	1-116-099-11	s	CAP, ELECT 100MF 105
C50	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C51	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C52	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C53	1-116-099-11	s	CAP, ELECT 100MF 105
C54	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C55	1-116-099-11	s	CAP, ELECT 100MF 105
C56	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C57	1-116-099-11	s	CAP, ELECT 100MF 105
C58	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C59	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C60	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C66	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C67	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C68	1-116-099-11	s	CAP, ELECT 100MF 105
C69	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C70	1-116-099-11	s	CAP, ELECT 100MF 105
C71	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C72	1-116-099-11	s	CAP, ELECT 100MF 105
C73	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C74	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C75	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C100	1-116-105-11	s	CAP, ELECT 68MF 105
C101	1-116-099-11	s	CAP, ELECT 100MF 105
C102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C300	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C301	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C302	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C303	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C304	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C307	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C308	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C310	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C311	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C313	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C317	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C401	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C403	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C404	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C408	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C409	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C410	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C411	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C412	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C413	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C414	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C415	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C416	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C417	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C418	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C419	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C420	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C421	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C422	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C423	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C424	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C425	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C426	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C427	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C428	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C429	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C430	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C431	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C432	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C433	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C434	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C435	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C436	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C437	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C438	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C439	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C440	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C441	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C442	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C443	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C444	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C445	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C446	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C447	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C448	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C449	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C450	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C451	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C452	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C453	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C454	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C455	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C456	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C457	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C458	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C459	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C460	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C461	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C462	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C463	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C464	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C465	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C466	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C467	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C468	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C469	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C470	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C471	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C472	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C473	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C474	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C475	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C476	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C477	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C478	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C479	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C480	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C481	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C482	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C483	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C484	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C485	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C486	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C487	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C488	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C489	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C490	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C491	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C492	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C493	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C494	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C495	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C496	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C497	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C498	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C499	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C500	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C501	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C502	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C503	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C504	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C505	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C506	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C507	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C508	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C509	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C510	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C511	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C512	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C513	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C514	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C515	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C516	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C517	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C518	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C519	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C520	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C521	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C551	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C552	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C554	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C556	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C558	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C560	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C562	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C563	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C564	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C565	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C566	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C567	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C600	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C601	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C602	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C603	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C604	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C605	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C606	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C607	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C608	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C609	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C610	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C611	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C612	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C613	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C614	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C615	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C616	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C617	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C618	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C619	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C620	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C621	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C622	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C623	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C624	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C625	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C626	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C627	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C628	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C629	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C630	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C631	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C632	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C633	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C634	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C635	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C636	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C637	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C638	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C639	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C640	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C641	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C642	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C643	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C644	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C645	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C646	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C647	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C648	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C649	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C650	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C651	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C652	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C653	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C654	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C655	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C656	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C657	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C658	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C659	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C660	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C661	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C662	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C663	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C664	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C665	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C666	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C667	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C668	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C669	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C670	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C671	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C672	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C673	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C674	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C675	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C676	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C677	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C678	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C679	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C680	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C681	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C682	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C683	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C684	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C685	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C686	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C687	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C688	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C689	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C690	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C691	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C692	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C693	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C694	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C695	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C696	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C697	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C698	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C699	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C700	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C702	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C703	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C704	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C705	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C706	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C707	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C708	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C709	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C710	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C711	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C712	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C713	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C714	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C715	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C716	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C717	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C718	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C719	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C720	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C721	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C800	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C803	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C806	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C807	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C809	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C811	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C812	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C814	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C815	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C817	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C900	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C901	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C902	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C903	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C904	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C905	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C906	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C907	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C908	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C909	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C910	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C911	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C912	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C913	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C914	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C915	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C916	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C917	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C918	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C919	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C920	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C921	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C922	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C924	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C925	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C926	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C927	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C928	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C929	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C930	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C931	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C933	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C934	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C935	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C936	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C937	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C938	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C939	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C940	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C941	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C943	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C944	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C945	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C946	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C949	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C950	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C951	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C952	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C953	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C954	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C955	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C956	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C957	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C958	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C959	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C960	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C961	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C962	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C963	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C964	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C966	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C967	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C968	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C969	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C970	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C971	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C972	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C973	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C974	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C975	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C976	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C977	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C978	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C979	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C980	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C982	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C983	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C984	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C985	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C986	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C987	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C988	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C989	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C990	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C991	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C992	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C993	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C994	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C995	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C997	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C998	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C999	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1000	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1001	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1004	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1007	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1008	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1009	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1010	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1014	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1016	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1017	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1018	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1020	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1022	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1024	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1025	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1026	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1027	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1028	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1029	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1042	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1043	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1044	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1045	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1046	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1047	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1048	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1049	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1050	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1052	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1053	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1054	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1055	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1057	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1059	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1070	1-116-099-11	s	CAP, ELECT 100MF 105
C1071	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1072	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1073	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1202	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1208	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C1209	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C1210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1300	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1301	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1302	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1303	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1304	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1305	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1306	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1307	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1310	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1311	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1312	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1313	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1314	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1315	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1316	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1317	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1318	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1401	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1402	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1403	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C1404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1406	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1409	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1410	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1411	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1412	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1413	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1415	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1416	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1417	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1418	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1420	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1422	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1424	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1425	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1428	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1429	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1430	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1431	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1432	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1433	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1434	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1435	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C1436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1440	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1441	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1442	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1443	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1445	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1446	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1447	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1452	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1453	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1456	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1457	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1458	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1459	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1461	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1464	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1465	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1466	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1467	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1468	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1469	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1470	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1471	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1472	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1473	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1474	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1475	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1476	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1477	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1478	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1479	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1480	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1481	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1482	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1483	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1484	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1485	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1486	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1487	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1488	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1489	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1490	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1491	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1492	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1493	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1494	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1495	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1496	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1497	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1498	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1499	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1500	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1501	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1502	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1503	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1504	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1505	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1506	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1507	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1508	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1510	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1512	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1513	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1514	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1515	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1517	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1518	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1519	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1521	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1523	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1525	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1527	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1529	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1531	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1545	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1546	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1547	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1548	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1549	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1550	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1551	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1553	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1554	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1555	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1556	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1557	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1558	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1559	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1560	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1561	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1570	1-116-099-11	s	CAP, ELECT 100MF 105
C1571	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1572	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1573	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1574	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1575	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1576	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1700	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1701	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1702	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1703	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1704	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1705	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1706	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1707	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1708	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1709	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1710	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1711	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1712	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1713	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1714	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1715	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1716	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1717	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1800	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1801	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1802	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1803	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1804	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1805	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1806	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1807	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1808	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C1809	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1810	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1811	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1812	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1813	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1814	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1815	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1816	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1817	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1818	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1819	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1820	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1821	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1822	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1823	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1824	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1825	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1826	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1827	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1828	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1829	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1830	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1831	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1832	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1833	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1834	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1835	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1836	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1837	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1838	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1839	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1840	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1841	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1842	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1843	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1844	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1845	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1846	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1847	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1848	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1849	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1850	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1851	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1852	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1853	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1854	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1855	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1856	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1857	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1858	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1859	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1860	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1861	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1862	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1863	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1864	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1865	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1866	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1867	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1868	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1869	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1870	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1871	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1872	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1873	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1874	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1875	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1876	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1877	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1878	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1879	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1880	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1881	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C1882	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1883	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1884	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1885	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1886	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1887	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1888	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1889	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1890	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1891	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1892	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1893	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1894	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1895	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1896	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1897	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1898	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1899	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1900	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1902	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1903	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1904	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1905	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1906	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1907	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1908	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1909	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1910	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1911	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1912	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1913	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1914	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1915	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1916	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1917	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1918	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1919	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1920	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C1921	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2000	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2001	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2002	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2006	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2010	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2100	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2101	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2108	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2109	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2110	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2111	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2112	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2113	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2114	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2115	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2116	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2117	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2118	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2119	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2120	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2121	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2122	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2123	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2124	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2125	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2126	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2127	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2128	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2129	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2130	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2131	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2132	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2133	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2134	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2135	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2136	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2137	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2138	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2139	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2140	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2141	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2142	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2143	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2144	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2145	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2146	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2147	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2148	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2149	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2150	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2151	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2152	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2153	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2154	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2155	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2156	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2157	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2158	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2159	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2160	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2161	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2162	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2163	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2164	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2165	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2166	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2167	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2168	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2169	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2170	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2171	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2172	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2173	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2174	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2175	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2176	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2177	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2178	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2179	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2180	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2181	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C2182	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2183	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2184	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2185	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2186	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2187	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2188	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2189	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2190	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2191	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2192	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2193	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2194	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2195	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2196	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2197	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2198	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2199	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2200	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2201	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2202	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2203	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2204	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2205	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2206	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2207	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2208	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2209	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2210	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2211	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2212	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2213	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2214	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2215	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2216	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2217	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2218	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2219	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2220	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C2221	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C2400	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2401	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2402	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2403	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2404	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2405	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2406	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2407	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2408	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2409	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2410	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2411	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2412	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2413	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2415	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2416	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2417	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2418	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2419	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2420	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2421	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2422	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2423	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2424	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2425	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2426	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2427	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2428	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2429	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2430	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2431	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2432	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2433	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2434	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2435	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2436	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2437	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2438	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2439	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2440	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2441	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2442	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2443	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2444	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2445	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2447	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2448	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2449	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2450	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2451	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2452	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2453	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2455	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2456	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2460	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2462	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2463	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2480	1-116-099-11	s	CAP, ELECT 100MF 105
C2481	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2482	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2483	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2484	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2485	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2486	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2490	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2491	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2492	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C2496	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2497	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2498	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2499	1-114-983-91	s	CAP, CHIP CERAMIC 2.2MF B 1608
C2500	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3002	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C3003	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3004	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3005	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3006	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C3007	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3008	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3009	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3010	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3011	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3012	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3013	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3014	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3015	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3016	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3017	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3018	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3019	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3020	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3021	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C3022	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3023	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3024	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C3100	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3102	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3103	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3104	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3105	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3106	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3107	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3109	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3110	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3111	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3112	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3113	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3114	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3115	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3116	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3117	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3118	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3119	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3120	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3121	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3122	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3123	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3124	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3125	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3126	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3127	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3128	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3129	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3130	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3131	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3132	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3190	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3191	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3194	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3195	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3200	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3201	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3203	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3204	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3205	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3206	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3207	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3208	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3209	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3210	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3211	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3212	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3213	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3214	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3215	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3216	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3217	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3218	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3219	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005
C3244	1-114-582-91	o	CAP, CERAMIC 0.1MF B 1005

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN102	1-815-660-91	s	CONNECTOR, BOARD TO BOARD 60P
CN300	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D1	6-501-361-01	s	DIODE RB051LA-40TR
D2	8-719-072-43	s	DIODE RB050L-40TE25
D3	8-719-071-34	s	DIODE RB521S-30-TE61
D4	8-719-071-34	s	DIODE RB521S-30-TE61
D5	6-501-361-01	s	DIODE RB051LA-40TR
D110	8-719-074-31	s	DIODE CL-196YG-CD-T
D111	8-719-074-31	s	DIODE CL-196YG-CD-T
D401	8-719-077-09	s	DIODE CL-196HR-CD-T
D402	8-719-074-31	s	DIODE CL-196YG-CD-T
D701	8-719-074-31	s	DIODE CL-196YG-CD-T
D702	8-719-077-09	s	DIODE CL-196HR-CD-T
D1601	8-719-074-31	s	DIODE CL-196YG-CD-T
D1602	8-719-074-31	s	DIODE CL-196YG-CD-T
D2300	8-719-074-31	s	DIODE CL-196YG-CD-T
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
E9	1-535-877-22	s	CHIP, CHECKER
E10	1-535-877-22	s	CHIP, CHECKER
E11	1-535-877-22	s	CHIP, CHECKER
E12	1-535-877-22	s	CHIP, CHECKER
E13	1-535-877-22	s	CHIP, CHECKER
E14	1-535-877-22	s	CHIP, CHECKER
F1	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F2	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB300	1-400-580-21	s	FERRITE, EMI (SMD)
FB400	1-400-580-21	s	FERRITE, EMI (SMD)
FB401	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB404	1-400-580-21	s	FERRITE, EMI (SMD)
FB550	1-400-580-21	s	FERRITE, EMI (SMD)
FB600	1-400-580-21	s	FERRITE, EMI (SMD)
FB601	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB603	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB604	1-400-580-21	s	FERRITE, EMI (SMD)
FB900	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB901	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB902	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB903	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB904	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB905	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB906	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB907	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB908	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB909	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB910	1-414-864-21	s	FERRITE, EMI (SMD) (1608)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB911	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB912	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB913	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1300	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1404	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1405	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1406	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1407	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1408	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1409	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1410	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1411	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1412	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1413	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1414	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1700	1-400-580-21	s	FERRITE, EMI (SMD)
FB1800	1-400-580-21	s	FERRITE, EMI (SMD)
FB1801	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1802	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1803	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB1804	1-400-580-21	s	FERRITE, EMI (SMD)
FB2000	1-400-580-21	s	FERRITE, EMI (SMD)
FB2100	1-400-580-21	s	FERRITE, EMI (SMD)
FB2101	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2102	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2103	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB2104	1-400-580-21	s	FERRITE, EMI (SMD)
FB2400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3120	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB3200	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-707-035-01	s	IC LP2996MRX
IC2	6-708-683-01	s	IC MP1583 DN-LF
IC3	8-759-597-57	s	IC LTC1628CG#TR
IC4	6-700-655-01	s	IC LT1963ES8#TR
IC50	6-701-572-01	s	IC TPS54610PWPR
IC65	6-701-572-01	s	IC TPS54610PWPR
IC110	6-709-014-01	s	IC UPC2933BT-E2-AZ
IC120	6-701-088-11	s	IC ICS553MILFT
IC804	6-700-763-01	s	IC DS90CR287MTDX
IC1202	6-714-203-01	s	IC MT46V16M16P-6T:K
IC1203	6-714-203-01	s	IC MT46V16M16P-6T:K
IC1300	6-700-764-01	s	IC DS90CR288AMTDX
IC1400	8-759-683-80	s	IC SN65LVDS1DBVR
IC2401	6-714-365-01	s	IC MX29LV640EBTI-70G
IC3004	6-714-365-01	s	IC MX29LV640EBTI-70G
IC3006	8-759-669-43	s	IC SN74LVC157APWR-12
IC3007	8-759-669-43	s	IC SN74LVC157APWR-12
IC3008	8-759-573-97	s	IC SN74LVC541APWR
IC3009	8-759-573-97	s	IC SN74LVC541APWR
IC3010	8-759-669-41	s	IC SN74LVC125APWR-12
IC3011	8-759-675-47	s	IC SN74LVC04APWR

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC3100	8-759-573-97	s	IC SN74LVC541APWR
IC3101	8-759-573-97	s	IC SN74LVC541APWR
IC3102	8-759-573-97	s	IC SN74LVC541APWR
IC3103	8-759-392-77	s	IC SN74LVC245APWR
IC3104	8-759-392-77	s	IC SN74LVC245APWR
IC3106	8-759-573-97	s	IC SN74LVC541APWR
IC3107	8-759-392-77	s	IC SN74LVC245APWR
IC3108	6-703-848-01	s	IC SN74CB3T3306DCUR
IC3109	6-703-848-01	s	IC SN74CB3T3306DCUR
IC3111	8-759-573-97	s	IC SN74LVC541APWR
IC3120	8-759-679-57	s	IC SN74LVC00APWR
IC3133	8-759-547-50	s	IC CDC516DGGR
IC3134	8-759-573-97	s	IC SN74LVC541APWR
IC3135	8-759-573-97	s	IC SN74LVC541APWR
IC3200	8-759-573-97	s	IC SN74LVC541APWR
IC3201	8-759-547-50	s	IC CDC516DGGR
IC3202	6-700-804-01	s	IC SN74LVC574APWR
IC3203	6-700-804-01	s	IC SN74LVC574APWR
IC3204	6-703-848-01	s	IC SN74CB3T3306DCUR
IC3205	6-703-848-01	s	IC SN74CB3T3306DCUR
IC3206	6-703-848-01	s	IC SN74CB3T3306DCUR
IC3207	6-703-848-01	s	IC SN74CB3T3306DCUR
IC3208	8-759-683-80	s	IC SN65LVDS1DBVR
IC3217	8-759-689-09	s	IC SN65LVDT2DBVR
IC3219	8-759-592-44	s	IC TC7SZ04FU(TE85R)
L1	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L2	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L3	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L4	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L5	1-416-948-21	s	COIL, CHOKE (SMD) 10UH
L6	1-400-161-21	s	INDUCTOR 1.2UH
L7	1-419-630-21	s	COIL, CHOKE 4.7UH
L50	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L65	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q1	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q2	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q3	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q4	6-550-750-01	s	TRANSISTOR SSM3K15FS-TE85L
Q5	6-550-750-01	s	TRANSISTOR SSM3K15FS-TE85L
Q6	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q7	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q30	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q31	6-552-545-01	s	TR SI4425DDY-T1-GE3
Q44	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q45	6-552-545-01	s	TR SI4425DDY-T1-GE3
R1	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R2	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R3	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-218-446-91	s	RES, CHIP 1 (1608)
R7	1-218-446-91	s	RES, CHIP 1 (1608)
R8	1-208-863-81	s	RES, CHIP 100 (1005)
R9	1-208-863-81	s	RES, CHIP 100 (1005)
R10	1-218-880-91	s	RES, CHIP 24K (1608)
R11	1-218-877-91	s	RES, CHIP 18K (1608)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R13	1-208-895-81	s	RES, CHIP 2.2K (1005)
R14	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R15	1-208-903-81	s	RES, CHIP 4.7K (1005)
R16	1-208-888-81	s	RES, CHIP 1.1K (1005)
R17	1-208-894-81	s	RES, CHIP 2.0K (1005)
R18	1-208-899-81	s	RES, CHIP 3.3K (1005)
R19	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-208-935-81	s	RES, CHIP 100K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R22	1-208-903-81	s	RES, CHIP 4.7K (1005)
R23	1-208-879-81	s	RES, CHIP 470 (1005)
R24	1-208-903-81	s	RES, CHIP 4.7K (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-208-911-81	s	RES, CHIP 10K (1005)
R27	1-218-446-91	s	RES, CHIP 1 (1608)
R28	1-218-446-91	s	RES, CHIP 1 (1608)
R29	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R30	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R31	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R32	1-208-901-81	s	RES, CHIP 3.9K (1005)
R33	1-220-870-81	s	RES, CHIP 10 (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R50	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R52	1-208-911-81	s	RES, CHIP 10K (1005)
R53	1-208-911-81	s	RES, CHIP 10K (1005)
R54	1-208-887-81	s	RES, CHIP 1.0K (1005)
R55	1-208-887-81	s	RES, CHIP 1.0K (1005)
R56	1-208-855-81	s	RES, CHIP 47 (1005)
R57	1-208-903-81	s	RES, CHIP 4.7K (1005)
R59	1-208-903-81	s	RES, CHIP 4.7K (1005)
R60	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R63	1-208-911-81	s	RES, CHIP 10K (1005)
R67	1-208-911-81	s	RES, CHIP 10K (1005)
R68	1-208-911-81	s	RES, CHIP 10K (1005)
R69	1-208-887-81	s	RES, CHIP 1.0K (1005)
R70	1-208-887-81	s	RES, CHIP 1.0K (1005)
R71	1-208-855-81	s	RES, CHIP 47 (1005)
R72	1-208-903-81	s	RES, CHIP 4.7K (1005)
R73	1-208-895-81	s	RES, CHIP 2.2K (1005)
R74	1-208-899-81	s	RES, CHIP 3.3K (1005)
R75	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R102	1-208-863-81	s	RES, CHIP 100 (1005)
R103	1-208-863-81	s	RES, CHIP 100 (1005)
R104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R105	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R106	1-208-903-81	s	RES, CHIP 4.7K (1005)
R107	1-208-903-81	s	RES, CHIP 4.7K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-220-870-81	s	RES, CHIP 10 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R111	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-220-870-81	s	RES, CHIP 10 (1005)
R114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R115	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R116	1-208-911-81	s	RES, CHIP 10K (1005)
R117	1-208-911-81	s	RES, CHIP 10K (1005)
R118	1-208-903-81	s	RES, CHIP 4.7K (1005)
R119	1-208-903-81	s	RES, CHIP 4.7K (1005)
R120	1-208-903-81	s	RES, CHIP 4.7K (1005)
R121	1-220-870-81	s	RES, CHIP 10 (1005)
R122	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R123	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R124	1-220-870-81	s	RES, CHIP 10 (1005)
R126	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R128	1-208-911-81	s	RES, CHIP 10K (1005)
R129	1-208-911-81	s	RES, CHIP 10K (1005)
R130	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R132	1-208-911-81	s	RES, CHIP 10K (1005)
R133	1-208-911-81	s	RES, CHIP 10K (1005)
R134	1-208-863-81	s	RES, CHIP 100 (1005)
R135	1-208-863-81	s	RES, CHIP 100 (1005)
R136	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R144	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R145	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R146	1-220-870-81	s	RES, CHIP 10 (1005)
R147	1-220-870-81	s	RES, CHIP 10 (1005)
R148	1-220-870-81	s	RES, CHIP 10 (1005)
R149	1-220-870-81	s	RES, CHIP 10 (1005)
R150	1-220-870-81	s	RES, CHIP 10 (1005)
R151	1-208-911-81	s	RES, CHIP 10K (1005)
R300	1-240-752-91	s	RES, CHIP 47 (0603)
R301	1-240-752-91	s	RES, CHIP 47 (0603)
R302	1-240-752-91	s	RES, CHIP 47 (0603)
R303	1-240-752-91	s	RES, CHIP 47 (0603)
R304	1-240-752-91	s	RES, CHIP 47 (0603)
R305	1-240-752-91	s	RES, CHIP 47 (0603)
R306	1-240-752-91	s	RES, CHIP 47 (0603)
R307	1-240-752-91	s	RES, CHIP 47 (0603)
R308	1-220-870-81	s	RES, CHIP 10 (1005)
R309	1-220-870-81	s	RES, CHIP 10 (1005)
R400	1-240-752-91	s	RES, CHIP 47 (0603)
R401	1-240-752-91	s	RES, CHIP 47 (0603)
R402	1-240-752-91	s	RES, CHIP 47 (0603)
R403	1-240-752-91	s	RES, CHIP 47 (0603)
R404	1-240-744-91	s	RES, CHIP 22 (0603)
R405	1-240-744-91	s	RES, CHIP 22 (0603)
R550	1-240-752-91	s	RES, CHIP 47 (0603)
R551	1-240-752-91	s	RES, CHIP 47 (0603)
R552	1-240-752-91	s	RES, CHIP 47 (0603)
R553	1-240-752-91	s	RES, CHIP 47 (0603)
R554	1-240-752-91	s	RES, CHIP 47 (0603)
R555	1-240-752-91	s	RES, CHIP 47 (0603)
R556	1-240-752-91	s	RES, CHIP 47 (0603)
R557	1-240-752-91	s	RES, CHIP 47 (0603)
R558	1-220-870-81	s	RES, CHIP 10 (1005)
R559	1-220-870-81	s	RES, CHIP 10 (1005)
R600	1-240-752-91	s	RES, CHIP 47 (0603)
R601	1-240-752-91	s	RES, CHIP 47 (0603)
R602	1-240-752-91	s	RES, CHIP 47 (0603)
R603	1-240-752-91	s	RES, CHIP 47 (0603)
R604	1-240-744-91	s	RES, CHIP 22 (0603)
R605	1-240-744-91	s	RES, CHIP 22 (0603)
R802	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R803	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R804	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R809	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R810	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R811	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R900	1-208-855-81	s	RES, CHIP 47 (1005)
R901	1-208-855-81	s	RES, CHIP 47 (1005)
R902	1-208-855-81	s	RES, CHIP 47 (1005)
R903	1-208-855-81	s	RES, CHIP 47 (1005)
R904	1-208-863-81	s	RES, CHIP 100 (1005)
R905	1-220-870-81	s	RES, CHIP 10 (1005)
R906	1-220-870-81	s	RES, CHIP 10 (1005)
R907	1-208-887-81	s	RES, CHIP 1.0K (1005)
R908	1-208-887-81	s	RES, CHIP 1.0K (1005)
R909	1-208-887-81	s	RES, CHIP 1.0K (1005)
R910	1-208-887-81	s	RES, CHIP 1.0K (1005)
R911	1-208-887-81	s	RES, CHIP 1.0K (1005)
R912	1-208-887-81	s	RES, CHIP 1.0K (1005)
R913	1-208-887-81	s	RES, CHIP 1.0K (1005)
R914	1-208-887-81	s	RES, CHIP 1.0K (1005)
R915	1-208-887-81	s	RES, CHIP 1.0K (1005)
R916	1-208-887-81	s	RES, CHIP 1.0K (1005)
R917	1-208-887-81	s	RES, CHIP 1.0K (1005)
R918	1-208-887-81	s	RES, CHIP 1.0K (1005)
R919	1-208-887-81	s	RES, CHIP 1.0K (1005)
R920	1-208-887-81	s	RES, CHIP 1.0K (1005)
R921	1-208-887-81	s	RES, CHIP 1.0K (1005)
R922	1-208-887-81	s	RES, CHIP 1.0K (1005)
R923	1-208-887-81	s	RES, CHIP 1.0K (1005)
R924	1-208-887-81	s	RES, CHIP 1.0K (1005)
R925	1-208-887-81	s	RES, CHIP 1.0K (1005)
R926	1-208-887-81	s	RES, CHIP 1.0K (1005)
R927	1-208-887-81	s	RES, CHIP 1.0K (1005)
R928	1-208-887-81	s	RES, CHIP 1.0K (1005)
R929	1-208-887-81	s	RES, CHIP 1.0K (1005)
R930	1-208-887-81	s	RES, CHIP 1.0K (1005)
R931	1-208-887-81	s	RES, CHIP 1.0K (1005)
R932	1-208-887-81	s	RES, CHIP 1.0K (1005)
R933	1-208-887-81	s	RES, CHIP 1.0K (1005)
R934	1-208-887-81	s	RES, CHIP 1.0K (1005)
R935	1-208-887-81	s	RES, CHIP 1.0K (1005)
R936	1-208-887-81	s	RES, CHIP 1.0K (1005)
R937	1-208-887-81	s	RES, CHIP 1.0K (1005)
R938	1-208-887-81	s	RES, CHIP 1.0K (1005)
R939	1-208-887-81	s	RES, CHIP 1.0K (1005)
R940	1-208-887-81	s	RES, CHIP 1.0K (1005)
R941	1-208-887-81	s	RES, CHIP 1.0K (1005)
R943	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R944	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R945	1-208-887-81	s	RES, CHIP 1.0K (1005)
R946	1-208-911-81	s	RES, CHIP 10K (1005)
R947	1-208-911-81	s	RES, CHIP 10K (1005)
R948	1-208-911-81	s	RES, CHIP 10K (1005)
R949	1-208-911-81	s	RES, CHIP 10K (1005)
R950	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R951	1-208-911-81	s	RES, CHIP 10K (1005)
R952	1-208-911-81	s	RES, CHIP 10K (1005)
R953	1-208-911-81	s	RES, CHIP 10K (1005)
R954	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R955	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R956	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1200	1-220-878-81	s	RES, CHIP 22 (1005)
R1201	1-220-878-81	s	RES, CHIP 22 (1005)
R1202	1-208-863-81	s	RES, CHIP 100 (1005)
R1203	1-220-882-81	s	RES, CHIP 33 (1005)
R1204	1-220-882-81	s	RES, CHIP 33 (1005)
R1205	1-208-857-81	s	RES, CHIP 56 (1005)
R1206	1-208-857-81	s	RES, CHIP 56 (1005)
R1207	1-208-857-81	s	RES, CHIP 56 (1005)
R1208	1-208-857-81	s	RES, CHIP 56 (1005)
R1209	1-208-857-81	s	RES, CHIP 56 (1005)
R1210	1-208-857-81	s	RES, CHIP 56 (1005)
R1211	1-208-857-81	s	RES, CHIP 56 (1005)
R1212	1-208-857-81	s	RES, CHIP 56 (1005)
R1213	1-208-857-81	s	RES, CHIP 56 (1005)
R1214	1-208-857-81	s	RES, CHIP 56 (1005)
R1215	1-208-857-81	s	RES, CHIP 56 (1005)
R1216	1-208-857-81	s	RES, CHIP 56 (1005)
R1217	1-208-857-81	s	RES, CHIP 56 (1005)
R1218	1-208-857-81	s	RES, CHIP 56 (1005)
R1219	1-208-857-81	s	RES, CHIP 56 (1005)
R1220	1-208-857-81	s	RES, CHIP 56 (1005)
R1221	1-208-857-81	s	RES, CHIP 56 (1005)
R1222	1-208-857-81	s	RES, CHIP 56 (1005)
R1223	1-208-857-81	s	RES, CHIP 56 (1005)
R1224	1-208-857-81	s	RES, CHIP 56 (1005)
R1225	1-220-882-81	s	RES, CHIP 33 (1005)
R1226	1-220-882-81	s	RES, CHIP 33 (1005)
R1227	1-220-882-81	s	RES, CHIP 33 (1005)
R1228	1-220-882-81	s	RES, CHIP 33 (1005)
R1229	1-208-857-81	s	RES, CHIP 56 (1005)
R1230	1-208-857-81	s	RES, CHIP 56 (1005)
R1231	1-208-857-81	s	RES, CHIP 56 (1005)
R1232	1-208-857-81	s	RES, CHIP 56 (1005)
R1233	1-208-857-81	s	RES, CHIP 56 (1005)
R1234	1-208-857-81	s	RES, CHIP 56 (1005)
R1235	1-208-857-81	s	RES, CHIP 56 (1005)
R1236	1-208-857-81	s	RES, CHIP 56 (1005)
R1237	1-208-857-81	s	RES, CHIP 56 (1005)
R1238	1-208-857-81	s	RES, CHIP 56 (1005)
R1239	1-208-857-81	s	RES, CHIP 56 (1005)
R1240	1-208-857-81	s	RES, CHIP 56 (1005)
R1241	1-208-857-81	s	RES, CHIP 56 (1005)
R1242	1-208-857-81	s	RES, CHIP 56 (1005)
R1243	1-208-857-81	s	RES, CHIP 56 (1005)
R1244	1-208-857-81	s	RES, CHIP 56 (1005)
R1245	1-208-857-81	s	RES, CHIP 56 (1005)
R1246	1-208-857-81	s	RES, CHIP 56 (1005)
R1247	1-208-857-81	s	RES, CHIP 56 (1005)
R1248	1-208-857-81	s	RES, CHIP 56 (1005)
R1249	1-220-882-81	s	RES, CHIP 33 (1005)
R1250	1-220-882-81	s	RES, CHIP 33 (1005)
R1251	1-208-935-81	s	RES, CHIP 100K (1005)
R1252	1-208-857-81	s	RES, CHIP 56 (1005)
R1253	1-208-857-81	s	RES, CHIP 56 (1005)
R1254	1-208-857-81	s	RES, CHIP 56 (1005)
R1255	1-208-857-81	s	RES, CHIP 56 (1005)
R1256	1-208-857-81	s	RES, CHIP 56 (1005)
R1257	1-208-857-81	s	RES, CHIP 56 (1005)
R1258	1-208-857-81	s	RES, CHIP 56 (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1259	1-208-857-81	s	RES, CHIP 56 (1005)
R1260	1-208-857-81	s	RES, CHIP 56 (1005)
R1261	1-208-857-81	s	RES, CHIP 56 (1005)
R1262	1-208-857-81	s	RES, CHIP 56 (1005)
R1263	1-208-857-81	s	RES, CHIP 56 (1005)
R1264	1-208-857-81	s	RES, CHIP 56 (1005)
R1265	1-208-857-81	s	RES, CHIP 56 (1005)
R1266	1-208-857-81	s	RES, CHIP 56 (1005)
R1267	1-208-857-81	s	RES, CHIP 56 (1005)
R1268	1-208-857-81	s	RES, CHIP 56 (1005)
R1269	1-208-857-81	s	RES, CHIP 56 (1005)
R1270	1-208-857-81	s	RES, CHIP 56 (1005)
R1271	1-208-857-81	s	RES, CHIP 56 (1005)
R1272	1-208-857-81	s	RES, CHIP 56 (1005)
R1273	1-208-857-81	s	RES, CHIP 56 (1005)
R1274	1-208-857-81	s	RES, CHIP 56 (1005)
R1275	1-208-857-81	s	RES, CHIP 56 (1005)
R1276	1-208-857-81	s	RES, CHIP 56 (1005)
R1277	1-208-857-81	s	RES, CHIP 56 (1005)
R1278	1-208-857-81	s	RES, CHIP 56 (1005)
R1279	1-208-857-81	s	RES, CHIP 56 (1005)
R1280	1-208-857-81	s	RES, CHIP 56 (1005)
R1281	1-208-857-81	s	RES, CHIP 56 (1005)
R1282	1-208-857-81	s	RES, CHIP 56 (1005)
R1283	1-208-857-81	s	RES, CHIP 56 (1005)
R1284	1-208-935-81	s	RES, CHIP 100K (1005)
R1300	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-863-81	s	RES, CHIP 100 (1005)
R1302	1-208-863-81	s	RES, CHIP 100 (1005)
R1303	1-208-863-81	s	RES, CHIP 100 (1005)
R1304	1-208-863-81	s	RES, CHIP 100 (1005)
R1305	1-208-863-81	s	RES, CHIP 100 (1005)
R1306	1-220-882-81	s	RES, CHIP 33 (1005)
R1350	1-208-863-81	s	RES, CHIP 100 (1005)
R1351	1-208-863-81	s	RES, CHIP 100 (1005)
R1400	1-208-855-81	s	RES, CHIP 47 (1005)
R1401	1-208-855-81	s	RES, CHIP 47 (1005)
R1402	1-208-855-81	s	RES, CHIP 47 (1005)
R1403	1-208-855-81	s	RES, CHIP 47 (1005)
R1404	1-208-855-81	s	RES, CHIP 47 (1005)
R1405	1-208-855-81	s	RES, CHIP 47 (1005)
R1406	1-220-870-81	s	RES, CHIP 10 (1005)
R1407	1-220-870-81	s	RES, CHIP 10 (1005)
R1408	1-220-870-81	s	RES, CHIP 10 (1005)
R1409	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1410	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1411	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1412	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1413	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1414	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1415	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1417	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1418	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1419	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1420	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1421	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1422	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1423	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1424	1-208-887-81	s	RES, CHIP 1.0K (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1425	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1426	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1431	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1432	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1433	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1434	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1435	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1436	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1437	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1438	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1439	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1441	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1443	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1444	1-208-911-81	s	RES, CHIP 10K (1005)
R1445	1-208-911-81	s	RES, CHIP 10K (1005)
R1446	1-208-911-81	s	RES, CHIP 10K (1005)
R1447	1-208-911-81	s	RES, CHIP 10K (1005)
R1448	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1449	1-208-911-81	s	RES, CHIP 10K (1005)
R1450	1-208-911-81	s	RES, CHIP 10K (1005)
R1451	1-208-911-81	s	RES, CHIP 10K (1005)
R1452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1455	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1456	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1457	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1458	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1459	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1460	1-220-870-81	s	RES, CHIP 10 (1005)
R1602	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1603	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1604	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1605	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1606	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1607	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1608	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1609	1-220-870-81	s	RES, CHIP 10 (1005)
R1610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1612	1-220-870-81	s	RES, CHIP 10 (1005)
R1613	1-220-870-81	s	RES, CHIP 10 (1005)
R1614	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1615	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1616	1-208-911-81	s	RES, CHIP 10K (1005)
R1617	1-208-911-81	s	RES, CHIP 10K (1005)
R1618	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1619	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1620	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1621	1-220-870-81	s	RES, CHIP 10 (1005)
R1622	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1623	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1624	1-220-870-81	s	RES, CHIP 10 (1005)
R1625	1-220-870-81	s	RES, CHIP 10 (1005)
R1626	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1627	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1628	1-208-911-81	s	RES, CHIP 10K (1005)
R1629	1-208-911-81	s	RES, CHIP 10K (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1630	1-220-878-81	s	RES, CHIP 22 (1005)
R1631	1-220-878-81	s	RES, CHIP 22 (1005)
R1633	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1634	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1700	1-240-752-91	s	RES, CHIP 47 (0603)
R1701	1-240-752-91	s	RES, CHIP 47 (0603)
R1702	1-240-752-91	s	RES, CHIP 47 (0603)
R1703	1-240-752-91	s	RES, CHIP 47 (0603)
R1704	1-240-752-91	s	RES, CHIP 47 (0603)
R1705	1-240-752-91	s	RES, CHIP 47 (0603)
R1706	1-240-752-91	s	RES, CHIP 47 (0603)
R1707	1-240-752-91	s	RES, CHIP 47 (0603)
R1708	1-220-870-81	s	RES, CHIP 10 (1005)
R1709	1-220-870-81	s	RES, CHIP 10 (1005)
R1800	1-240-752-91	s	RES, CHIP 47 (0603)
R1801	1-240-752-91	s	RES, CHIP 47 (0603)
R1802	1-240-752-91	s	RES, CHIP 47 (0603)
R1803	1-240-752-91	s	RES, CHIP 47 (0603)
R1804	1-240-744-91	s	RES, CHIP 22 (0603)
R1805	1-240-744-91	s	RES, CHIP 22 (0603)
R2000	1-240-752-91	s	RES, CHIP 47 (0603)
R2001	1-240-752-91	s	RES, CHIP 47 (0603)
R2002	1-240-752-91	s	RES, CHIP 47 (0603)
R2003	1-240-752-91	s	RES, CHIP 47 (0603)
R2004	1-240-752-91	s	RES, CHIP 47 (0603)
R2005	1-240-752-91	s	RES, CHIP 47 (0603)
R2006	1-240-752-91	s	RES, CHIP 47 (0603)
R2007	1-240-752-91	s	RES, CHIP 47 (0603)
R2008	1-220-870-81	s	RES, CHIP 10 (1005)
R2009	1-220-870-81	s	RES, CHIP 10 (1005)
R2100	1-240-752-91	s	RES, CHIP 47 (0603)
R2101	1-240-752-91	s	RES, CHIP 47 (0603)
R2102	1-240-752-91	s	RES, CHIP 47 (0603)
R2103	1-240-752-91	s	RES, CHIP 47 (0603)
R2104	1-240-744-91	s	RES, CHIP 22 (0603)
R2105	1-240-744-91	s	RES, CHIP 22 (0603)
R2303	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2304	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2305	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2306	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2307	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2308	1-220-870-81	s	RES, CHIP 10 (1005)
R2309	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2310	1-220-870-81	s	RES, CHIP 10 (1005)
R2311	1-220-870-81	s	RES, CHIP 10 (1005)
R2312	1-220-870-81	s	RES, CHIP 10 (1005)
R2314	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2315	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2330	1-208-863-81	s	RES, CHIP 100 (1005)
R2331	1-220-878-81	s	RES, CHIP 22 (1005)
R2332	1-220-878-81	s	RES, CHIP 22 (1005)
R2333	1-220-878-81	s	RES, CHIP 22 (1005)
R2405	1-208-911-81	s	RES, CHIP 10K (1005)
R2406	1-208-911-81	s	RES, CHIP 10K (1005)
R2407	1-208-911-81	s	RES, CHIP 10K (1005)
R2408	1-208-911-81	s	RES, CHIP 10K (1005)
R2409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2410	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2413	1-220-878-81	s	RES, CHIP 22 (1005)
R2414	1-208-911-81	s	RES, CHIP 10K (1005)
R2415	1-208-911-81	s	RES, CHIP 10K (1005)
R2416	1-208-911-81	s	RES, CHIP 10K (1005)
R2417	1-208-911-81	s	RES, CHIP 10K (1005)
R2418	1-220-878-81	s	RES, CHIP 22 (1005)
R2419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2420	1-220-878-81	s	RES, CHIP 22 (1005)
R2421	1-220-870-81	s	RES, CHIP 10 (1005)
R2422	1-208-855-81	s	RES, CHIP 47 (1005)
R2423	1-208-855-81	s	RES, CHIP 47 (1005)
R2424	1-208-855-81	s	RES, CHIP 47 (1005)
R2425	1-220-878-81	s	RES, CHIP 22 (1005)
R2426	1-220-878-81	s	RES, CHIP 22 (1005)
R2427	1-208-911-81	s	RES, CHIP 10K (1005)
R2429	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2431	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3000	1-208-911-81	s	RES, CHIP 10K (1005)
R3002	1-208-911-81	s	RES, CHIP 10K (1005)
R3004	1-208-911-81	s	RES, CHIP 10K (1005)
R3005	1-208-911-81	s	RES, CHIP 10K (1005)
R3006	1-208-911-81	s	RES, CHIP 10K (1005)
R3008	1-208-855-81	s	RES, CHIP 47 (1005)
R3009	1-208-855-81	s	RES, CHIP 47 (1005)
R3010	1-208-855-81	s	RES, CHIP 47 (1005)
R3011	1-208-911-81	s	RES, CHIP 10K (1005)
R3012	1-208-911-81	s	RES, CHIP 10K (1005)
R3013	1-208-911-81	s	RES, CHIP 10K (1005)
R3014	1-208-911-81	s	RES, CHIP 10K (1005)
R3015	1-208-911-81	s	RES, CHIP 10K (1005)
R3018	1-208-911-81	s	RES, CHIP 10K (1005)
R3019	1-208-911-81	s	RES, CHIP 10K (1005)
R3020	1-208-911-81	s	RES, CHIP 10K (1005)
R3021	1-208-911-81	s	RES, CHIP 10K (1005)
R3022	1-208-871-81	s	RES, CHIP 220 (1005)
R3023	1-208-911-81	s	RES, CHIP 10K (1005)
R3024	1-208-911-81	s	RES, CHIP 10K (1005)
R3025	1-208-911-81	s	RES, CHIP 10K (1005)
R3026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3027	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3028	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3029	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3030	1-220-870-81	s	RES, CHIP 10 (1005)
R3031	1-220-870-81	s	RES, CHIP 10 (1005)
R3032	1-220-870-81	s	RES, CHIP 10 (1005)
R3033	1-220-870-81	s	RES, CHIP 10 (1005)
R3034	1-220-870-81	s	RES, CHIP 10 (1005)
R3035	1-208-911-81	s	RES, CHIP 10K (1005)
R3036	1-208-911-81	s	RES, CHIP 10K (1005)
R3037	1-208-911-81	s	RES, CHIP 10K (1005)
R3038	1-208-911-81	s	RES, CHIP 10K (1005)
R3039	1-208-911-81	s	RES, CHIP 10K (1005)
R3040	1-208-911-81	s	RES, CHIP 10K (1005)
R3041	1-208-911-81	s	RES, CHIP 10K (1005)
R3042	1-208-911-81	s	RES, CHIP 10K (1005)
R3043	1-220-870-81	s	RES, CHIP 10 (1005)
R3044	1-220-870-81	s	RES, CHIP 10 (1005)
R3045	1-220-870-81	s	RES, CHIP 10 (1005)
R3046	1-220-870-81	s	RES, CHIP 10 (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3047	1-220-870-81	s	RES, CHIP 10 (1005)
R3048	1-208-863-81	s	RES, CHIP 100 (1005)
R3049	1-208-863-81	s	RES, CHIP 100 (1005)
R3050	1-208-863-81	s	RES, CHIP 100 (1005)
R3051	1-208-863-81	s	RES, CHIP 100 (1005)
R3052	1-220-870-81	s	RES, CHIP 10 (1005)
R3053	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3054	1-220-870-81	s	RES, CHIP 10 (1005)
R3055	1-208-855-81	s	RES, CHIP 47 (1005)
R3056	1-208-855-81	s	RES, CHIP 47 (1005)
R3057	1-208-871-81	s	RES, CHIP 220 (1005)
R3101	1-208-935-81	s	RES, CHIP 100K (1005)
R3102	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3103	1-208-911-81	s	RES, CHIP 10K (1005)
R3104	1-208-935-81	s	RES, CHIP 100K (1005)
R3105	1-208-935-81	s	RES, CHIP 100K (1005)
R3106	1-208-863-81	s	RES, CHIP 100 (1005)
R3107	1-208-863-81	s	RES, CHIP 100 (1005)
R3108	1-208-855-81	s	RES, CHIP 47 (1005)
R3109	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3113	1-208-855-81	s	RES, CHIP 47 (1005)
R3114	1-208-855-81	s	RES, CHIP 47 (1005)
R3115	1-220-870-81	s	RES, CHIP 10 (1005)
R3117	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3118	1-220-878-81	s	RES, CHIP 22 (1005)
R3121	1-220-870-81	s	RES, CHIP 10 (1005)
R3122	1-220-870-81	s	RES, CHIP 10 (1005)
R3123	1-220-870-81	s	RES, CHIP 10 (1005)
R3124	1-220-870-81	s	RES, CHIP 10 (1005)
R3125	1-220-878-81	s	RES, CHIP 22 (1005)
R3126	1-208-911-81	s	RES, CHIP 10K (1005)
R3127	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3128	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3129	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3131	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3132	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3135	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3137	1-220-870-81	s	RES, CHIP 10 (1005)
R3138	1-220-870-81	s	RES, CHIP 10 (1005)
R3139	1-220-870-81	s	RES, CHIP 10 (1005)
R3140	1-220-870-81	s	RES, CHIP 10 (1005)
R3141	1-220-870-81	s	RES, CHIP 10 (1005)
R3142	1-220-870-81	s	RES, CHIP 10 (1005)
R3143	1-220-870-81	s	RES, CHIP 10 (1005)
R3144	1-220-870-81	s	RES, CHIP 10 (1005)
R3145	1-220-870-81	s	RES, CHIP 10 (1005)
R3146	1-220-870-81	s	RES, CHIP 10 (1005)
R3147	1-220-870-81	s	RES, CHIP 10 (1005)
R3148	1-220-870-81	s	RES, CHIP 10 (1005)
R3149	1-220-870-81	s	RES, CHIP 10 (1005)
R3150	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3151	1-220-870-81	s	RES, CHIP 10 (1005)
R3152	1-220-870-81	s	RES, CHIP 10 (1005)
R3153	1-220-870-81	s	RES, CHIP 10 (1005)
R3154	1-220-870-81	s	RES, CHIP 10 (1005)
R3155	1-220-870-81	s	RES, CHIP 10 (1005)
R3156	1-220-870-81	s	RES, CHIP 10 (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R3157	1-220-870-81	s	RES, CHIP 10 (1005)
R3158	1-220-870-81	s	RES, CHIP 10 (1005)
R3159	1-220-870-81	s	RES, CHIP 10 (1005)
R3160	1-220-870-81	s	RES, CHIP 10 (1005)
R3161	1-208-911-81	s	RES, CHIP 10K (1005)
R3162	1-208-911-81	s	RES, CHIP 10K (1005)
R3163	1-208-911-81	s	RES, CHIP 10K (1005)
R3164	1-220-870-81	s	RES, CHIP 10 (1005)
R3165	1-208-863-81	s	RES, CHIP 100 (1005)
R3166	1-208-863-81	s	RES, CHIP 100 (1005)
R3167	1-208-863-81	s	RES, CHIP 100 (1005)
R3180	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3181	1-220-878-81	s	RES, CHIP 22 (1005)
R3182	1-220-878-81	s	RES, CHIP 22 (1005)
R3183	1-220-878-81	s	RES, CHIP 22 (1005)
R3188	1-220-878-81	s	RES, CHIP 22 (1005)
R3189	1-220-870-81	s	RES, CHIP 10 (1005)
R3190	1-220-870-81	s	RES, CHIP 10 (1005)
R3191	1-208-855-81	s	RES, CHIP 47 (1005)
R3192	1-208-855-81	s	RES, CHIP 47 (1005)
R3193	1-208-855-81	s	RES, CHIP 47 (1005)
R3194	1-208-855-81	s	RES, CHIP 47 (1005)
R3195	1-208-935-81	s	RES, CHIP 100K (1005)
R3196	1-208-935-81	s	RES, CHIP 100K (1005)
R3197	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3198	1-208-935-81	s	RES, CHIP 100K (1005)
R3199	1-208-935-81	s	RES, CHIP 100K (1005)
R3200	1-208-911-81	s	RES, CHIP 10K (1005)
R3201	1-220-878-81	s	RES, CHIP 22 (1005)
R3202	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3203	1-208-855-81	s	RES, CHIP 47 (1005)
R3204	1-208-903-81	s	RES, CHIP 4.7K (1005)
R3205	1-208-855-81	s	RES, CHIP 47 (1005)
R3206	1-208-855-81	s	RES, CHIP 47 (1005)
R3207	1-208-855-81	s	RES, CHIP 47 (1005)
R3208	1-208-855-81	s	RES, CHIP 47 (1005)
R3209	1-208-855-81	s	RES, CHIP 47 (1005)
R3210	1-208-855-81	s	RES, CHIP 47 (1005)
R3211	1-208-855-81	s	RES, CHIP 47 (1005)
R3212	1-208-855-81	s	RES, CHIP 47 (1005)
R3213	1-208-855-81	s	RES, CHIP 47 (1005)
R3214	1-208-855-81	s	RES, CHIP 47 (1005)
R3215	1-208-855-81	s	RES, CHIP 47 (1005)
R3216	1-208-855-81	s	RES, CHIP 47 (1005)
R3217	1-208-855-81	s	RES, CHIP 47 (1005)
R3218	1-208-855-81	s	RES, CHIP 47 (1005)
R3219	1-208-855-81	s	RES, CHIP 47 (1005)
R3220	1-208-855-81	s	RES, CHIP 47 (1005)
R3250	1-208-911-81	s	RES, CHIP 10K (1005)
R3251	1-208-911-81	s	RES, CHIP 10K (1005)
R3254	1-208-911-81	s	RES, CHIP 10K (1005)
R3255	1-208-911-81	s	RES, CHIP 10K (1005)
R3256	1-208-855-81	s	RES, CHIP 47 (1005)
R3257	1-208-911-81	s	RES, CHIP 10K (1005)
R3258	1-208-911-81	s	RES, CHIP 10K (1005)
R3260	1-208-911-81	s	RES, CHIP 10K (1005)
R3261	1-208-911-81	s	RES, CHIP 10K (1005)
R3280	1-208-855-81	s	RES, CHIP 47 (1005)
R3281	1-208-855-81	s	RES, CHIP 47 (1005)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB800	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB801	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB900	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB901	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB902	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB903	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB904	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1100	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1350	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1401	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB2300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2301	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2302	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2303	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2440	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2441	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2442	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2443	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3020	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3021	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3022	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3023	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3100	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3101	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3102	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3103	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3104	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3105	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3106	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB3107	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3108	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3109	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3110	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3111	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3112	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3113	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3114	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3115	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3116	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3117	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3118	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3120	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3121	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3122	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3123	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3124	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3125	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3126	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3127	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3128	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3129	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3130	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3131	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3132	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3133	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3134	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3135	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3136	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3137	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(HPR-35 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB3138	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3139	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3140	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3141	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3142	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3143	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3144	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3145	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3146	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3201	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3202	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3203	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3204	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3205	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB3206	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3207	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3208	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3209	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S101	1-692-270-41	s	SWITCH, SLIDE
S102	1-692-270-41	s	SWITCH, SLIDE
S104	1-692-270-41	s	SWITCH, SLIDE
S2300	1-692-270-41	s	SWITCH, SLIDE
TP800	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP802	1-535-877-22	s	CHIP, CHECKER
TP803	1-535-877-22	s	CHIP, CHECKER
TP1350	1-535-877-22	s	CHIP, CHECKER
TP1351	1-535-877-22	s	CHIP, CHECKER
TP1352	1-535-877-22	s	CHIP, CHECKER
TP1353	1-535-877-22	s	CHIP, CHECKER
TP1601	1-535-877-22	s	CHIP, CHECKER
TP1602	1-535-877-22	s	CHIP, CHECKER
TP2300	1-535-877-22	s	CHIP, CHECKER
TP2301	1-535-877-22	s	CHIP, CHECKER
TP2302	1-535-877-22	s	CHIP, CHECKER
TP2303	1-535-877-22	s	CHIP, CHECKER
TP3001	1-535-877-22	s	CHIP, CHECKER
TP3002	1-535-877-22	s	CHIP, CHECKER
TP3003	1-535-877-22	s	CHIP, CHECKER
TP3004	1-535-877-22	s	CHIP, CHECKER
TP3101	1-535-877-22	s	CHIP, CHECKER
TP3102	1-535-877-22	s	CHIP, CHECKER
X100	1-813-493-11	s	OSCILLATOR, CRYSTAL

IF-1071 BOARD (HKSR-5804)

Ref. No. or Q'ty	Part No.	SP	Description
CN1	1-820-907-11	s	JACK, MODULAR
CN2	1-819-983-11	s	JACK, MODULAR

KY-526G BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1154-671-A	s	MOUNTED CIRCUIT BOARD, KY-526G
C1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN1	1-778-650-31	s	CONNECTOR, FFC/FPC (ZIF) ST 30P
D1	8-719-069-28	s	DIODE 1SS400TE61
D2	8-719-069-28	s	DIODE 1SS400TE61
D3	8-719-069-28	s	DIODE 1SS400TE61
D4	8-719-069-28	s	DIODE 1SS400TE61
D5	8-719-069-28	s	DIODE 1SS400TE61
D6	8-719-069-28	s	DIODE 1SS400TE61
D7	8-719-069-28	s	DIODE 1SS400TE61
D8	8-719-069-28	s	DIODE 1SS400TE61
D9	8-719-069-28	s	DIODE 1SS400TE61
D10	8-719-069-28	s	DIODE 1SS400TE61
D11	8-719-069-28	s	DIODE 1SS400TE61
D12	8-719-069-28	s	DIODE 1SS400TE61
D13	8-719-069-28	s	DIODE 1SS400TE61
D14	8-719-069-28	s	DIODE 1SS400TE61
D15	8-719-069-28	s	DIODE 1SS400TE61
D16	8-719-069-28	s	DIODE 1SS400TE61
D17	8-719-069-28	s	DIODE 1SS400TE61
D18	8-719-069-28	s	DIODE 1SS400TE61
D19	8-719-069-28	s	DIODE 1SS400TE61
D20	8-719-069-28	s	DIODE 1SS400TE61
D21	8-719-069-28	s	DIODE 1SS400TE61
D22	8-719-069-28	s	DIODE 1SS400TE61
D23	8-719-069-28	s	DIODE 1SS400TE61
D24	8-719-069-28	s	DIODE 1SS400TE61
D25	8-719-069-28	s	DIODE 1SS400TE61
D26	8-719-069-28	s	DIODE 1SS400TE61
D27	8-719-069-28	s	DIODE 1SS400TE61
D28	8-719-069-28	s	DIODE 1SS400TE61
D29	8-719-069-28	s	DIODE 1SS400TE61
D30	8-719-069-28	s	DIODE 1SS400TE61
D31	8-719-069-28	s	DIODE 1SS400TE61
D32	8-719-069-28	s	DIODE 1SS400TE61
D33	8-719-069-28	s	DIODE 1SS400TE61
D34	8-719-069-28	s	DIODE 1SS400TE61
D35	8-719-069-28	s	DIODE 1SS400TE61
D36	8-719-069-28	s	DIODE 1SS400TE61
D37	8-719-069-28	s	DIODE 1SS400TE61
D38	8-719-069-28	s	DIODE 1SS400TE61
D39	8-719-069-28	s	DIODE 1SS400TE61
D40	8-719-069-28	s	DIODE 1SS400TE61
D41	8-719-069-28	s	DIODE 1SS400TE61
D42	8-719-069-28	s	DIODE 1SS400TE61
D43	8-719-069-28	s	DIODE 1SS400TE61
D44	8-719-069-28	s	DIODE 1SS400TE61
D45	8-719-069-28	s	DIODE 1SS400TE61
D46	8-719-069-28	s	DIODE 1SS400TE61
D47	8-719-069-28	s	DIODE 1SS400TE61
D48	8-719-069-28	s	DIODE 1SS400TE61
D49	8-719-069-28	s	DIODE 1SS400TE61
D50	8-719-069-28	s	DIODE 1SS400TE61
D51	8-719-069-28	s	DIODE 1SS400TE61
D52	8-719-069-28	s	DIODE 1SS400TE61
D53	8-719-069-28	s	DIODE 1SS400TE61
D54	8-719-069-28	s	DIODE 1SS400TE61

(KY-526G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D55	8-719-069-28	s	DIODE 1SS400TE61
D56	8-719-069-28	s	DIODE 1SS400TE61
D57	8-719-069-28	s	DIODE 1SS400TE61
D58	8-719-069-28	s	DIODE 1SS400TE61
D59	8-719-069-28	s	DIODE 1SS400TE61
D60	8-719-069-28	s	DIODE 1SS400TE61
D61	8-719-069-28	s	DIODE 1SS400TE61
D62	8-719-069-28	s	DIODE 1SS400TE61
D63	8-719-069-28	s	DIODE 1SS400TE61
D64	8-719-069-28	s	DIODE 1SS400TE61
D65	8-719-069-28	s	DIODE 1SS400TE61
D66	8-719-069-28	s	DIODE 1SS400TE61
D67	8-719-069-28	s	DIODE 1SS400TE61
D68	8-719-069-28	s	DIODE 1SS400TE61
D69	8-719-069-28	s	DIODE 1SS400TE61
D70	8-719-069-28	s	DIODE 1SS400TE61
D71	8-719-069-28	s	DIODE 1SS400TE61
D72	8-719-069-28	s	DIODE 1SS400TE61
D73	8-719-069-28	s	DIODE 1SS400TE61
D74	8-719-069-28	s	DIODE 1SS400TE61
FB2	1-469-094-11	s	FERRITE, EMI (SMD)
FB3	1-469-094-11	s	FERRITE, EMI (SMD)
FB4	1-469-094-11	s	FERRITE, EMI (SMD)
FB5	1-469-094-11	s	FERRITE, EMI (SMD)
FB6	1-469-094-11	s	FERRITE, EMI (SMD)
FB7	1-469-094-11	s	FERRITE, EMI (SMD)
FB8	1-469-094-11	s	FERRITE, EMI (SMD)
FB9	1-469-094-11	s	FERRITE, EMI (SMD)
FB10	1-469-094-11	s	FERRITE, EMI (SMD)
FB11	1-469-094-11	s	FERRITE, EMI (SMD)
FB12	1-469-094-11	s	FERRITE, EMI (SMD)
FB13	1-469-094-11	s	FERRITE, EMI (SMD)
FB14	1-469-094-11	s	FERRITE, EMI (SMD)
FB15	1-469-094-11	s	FERRITE, EMI (SMD)
FB16	1-469-094-11	s	FERRITE, EMI (SMD)
FB17	1-469-094-11	s	FERRITE, EMI (SMD)
FB18	1-469-094-11	s	FERRITE, EMI (SMD)
FB19	1-469-094-11	s	FERRITE, EMI (SMD)
FB20	1-469-094-11	s	FERRITE, EMI (SMD)
Q1	8-729-928-27	s	TRANSISTOR DTA144EE
Q2	8-729-928-27	s	TRANSISTOR DTA144EE
Q3	8-729-928-27	s	TRANSISTOR DTA144EE
Q4	8-729-928-27	s	TRANSISTOR DTA144EE
Q5	8-729-928-27	s	TRANSISTOR DTA144EE
Q6	8-729-928-27	s	TRANSISTOR DTA144EE
Q7	8-729-928-27	s	TRANSISTOR DTA144EE
Q8	8-729-928-27	s	TRANSISTOR DTA144EE
Q9	8-729-928-27	s	TRANSISTOR DTA144EE
Q10	8-729-928-27	s	TRANSISTOR DTA144EE
R1	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R2	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R3	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R4	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R5	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R6	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R7	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R8	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
VDR1	1-801-925-11	s	VARISTOR, CHIP

(KY-526G BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
VDR2	1-801-925-11	s	VARISTOR, CHIP
VDR3	1-801-925-11	s	VARISTOR, CHIP
VDR4	1-801-925-11	s	VARISTOR, CHIP
VDR5	1-801-925-11	s	VARISTOR, CHIP
VDR6	1-801-925-11	s	VARISTOR, CHIP
VDR7	1-801-925-11	s	VARISTOR, CHIP
VDR8	1-801-925-11	s	VARISTOR, CHIP
VDR9	1-801-925-11	s	VARISTOR, CHIP
VDR10	1-801-925-11	s	VARISTOR, CHIP
VDR11	1-801-925-11	s	VARISTOR, CHIP
VDR12	1-801-925-11	s	VARISTOR, CHIP
VDR13	1-801-925-11	s	VARISTOR, CHIP
VDR14	1-801-925-11	s	VARISTOR, CHIP
VDR15	1-801-925-11	s	VARISTOR, CHIP
VDR16	1-801-925-11	s	VARISTOR, CHIP
VDR17	1-801-925-11	s	VARISTOR, CHIP
VDR18	1-801-925-11	s	VARISTOR, CHIP

KY-527 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8346-862-A	s	MOUNTED CIRCUIT BOARD, KY-527
3pcs	4-937-336-11	s	HOLDER, LED
C1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C4	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
D1	8-719-059-98	s	LED SLR-342VC3F
D2	8-719-069-28	s	DIODE 1SS400TE61
D3	8-719-069-28	s	DIODE 1SS400TE61
D4	8-719-056-07	s	LED SLR-342MC3F
D5	8-719-069-28	s	DIODE 1SS400TE61
D6	8-719-069-28	s	DIODE 1SS400TE61
D7	8-719-056-06	s	LED SLR-342DC3F
D8	8-719-069-28	s	DIODE 1SS400TE61
D9	8-719-069-28	s	DIODE 1SS400TE61
D10	8-719-056-07	s	LED SLR-342MC3F
D11	8-719-059-98	s	LED SLR-342VC3F
D12	8-719-069-28	s	DIODE 1SS400TE61
D13	8-719-069-28	s	DIODE 1SS400TE61
D14	8-719-056-07	s	LED SLR-342MC3F
D15	8-719-069-28	s	DIODE 1SS400TE61
D16	8-719-069-28	s	DIODE 1SS400TE61
D17	8-719-056-06	s	LED SLR-342DC3F
D18	8-719-069-28	s	DIODE 1SS400TE61
D19	8-719-056-06	s	LED SLR-342DC3F
D20	8-719-056-06	s	LED SLR-342DC3F
D21	8-719-069-28	s	DIODE 1SS400TE61
D22	8-719-069-28	s	DIODE 1SS400TE61
EN1	1-418-479-11	s	ENCODER, CERAMIC TYPE
FB1	1-469-094-11	s	FERRITE, EMI (SMD)
FB2	1-469-094-11	s	FERRITE, EMI (SMD)
FB3	1-469-094-11	s	FERRITE, EMI (SMD)
FB4	1-469-094-11	s	FERRITE, EMI (SMD)
FB5	1-469-094-11	s	FERRITE, EMI (SMD)
FB6	1-469-094-11	s	FERRITE, EMI (SMD)
FB7	1-469-094-11	s	FERRITE, EMI (SMD)
FB8	1-469-094-11	s	FERRITE, EMI (SMD)
FB9	1-469-094-11	s	FERRITE, EMI (SMD)
FB10	1-469-094-11	s	FERRITE, EMI (SMD)
FB11	1-469-094-11	s	FERRITE, EMI (SMD)
FB12	1-469-094-11	s	FERRITE, EMI (SMD)
FB13	1-469-094-11	s	FERRITE, EMI (SMD)
FB14	1-469-094-11	s	FERRITE, EMI (SMD)
FB15	1-469-094-11	s	FERRITE, EMI (SMD)
FB16	1-469-094-11	s	FERRITE, EMI (SMD)
FB17	1-469-094-11	s	FERRITE, EMI (SMD)
FB18	1-469-094-11	s	FERRITE, EMI (SMD)
FB19	1-469-094-11	s	FERRITE, EMI (SMD)
FB20	1-469-094-11	s	FERRITE, EMI (SMD)
FB21	1-469-094-11	s	FERRITE, EMI (SMD)
FB22	1-469-094-11	s	FERRITE, EMI (SMD)
FB23	1-469-094-11	s	FERRITE, EMI (SMD)
FB24	1-469-094-11	s	FERRITE, EMI (SMD)
FB25	1-469-094-11	s	FERRITE, EMI (SMD)
FB26	1-469-094-11	s	FERRITE, EMI (SMD)
FB27	1-469-094-11	s	FERRITE, EMI (SMD)
FB28	1-469-094-11	s	FERRITE, EMI (SMD)

(KY-527 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB29	1-469-094-11	s	FERRITE, EMI (SMD)
FB30	1-469-094-11	s	FERRITE, EMI (SMD)
FB31	1-469-094-11	s	FERRITE, EMI (SMD)
FB32	1-469-094-11	s	FERRITE, EMI (SMD)
FB33	1-469-094-11	s	FERRITE, EMI (SMD)
FB34	1-469-094-11	s	FERRITE, EMI (SMD)
FB35	1-469-094-11	s	FERRITE, EMI (SMD)
FB36	1-469-094-11	s	FERRITE, EMI (SMD)
FB37	1-469-094-11	s	FERRITE, EMI (SMD)
FB38	1-469-094-11	s	FERRITE, EMI (SMD)
FB39	1-469-094-11	s	FERRITE, EMI (SMD)
IC2	8-759-549-01	s	IC SN74LV125APWR
Q1	8-729-928-27	s	TRANSISTOR DTA144EE
Q2	8-729-928-27	s	TRANSISTOR DTA144EE
Q3	8-729-928-81	s	TRANSISTOR DTC144EE
Q8	8-729-928-81	s	TRANSISTOR DTC144EE
Q9	8-729-928-81	s	TRANSISTOR DTC144EE
Q10	8-729-928-81	s	TRANSISTOR DTC144EE
Q11	8-729-928-81	s	TRANSISTOR DTC144EE
Q12	8-729-928-81	s	TRANSISTOR DTC144EE
Q13	8-729-928-81	s	TRANSISTOR DTC144EE
Q22	8-729-928-81	s	TRANSISTOR DTC144EE
Q23	8-729-928-81	s	TRANSISTOR DTC144EE
Q24	8-729-928-81	s	TRANSISTOR DTC144EE
Q25	8-729-928-81	s	TRANSISTOR DTC144EE
Q26	8-729-928-81	s	TRANSISTOR DTC144EE
Q27	8-729-928-81	s	TRANSISTOR DTC144EE
Q28	8-729-928-81	s	TRANSISTOR DTC144EE
Q29	8-729-928-81	s	TRANSISTOR DTC144EE
Q30	8-729-928-81	s	TRANSISTOR DTC144EE
Q31	8-729-928-81	s	TRANSISTOR DTC144EE
Q32	8-729-928-81	s	TRANSISTOR DTC144EE
Q33	8-729-928-81	s	TRANSISTOR DTC144EE
Q34	8-729-928-81	s	TRANSISTOR DTC144EE
Q35	8-729-928-81	s	TRANSISTOR DTC144EE
Q36	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R2	1-218-825-11	s	RESISTOR,CHIP 120 1/10W (1608)
R3	1-211-983-11	s	RESISTOR,CHIP 39 1/10W (1608)
R4	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R13	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R14	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R16	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R17	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R18	1-218-825-11	s	RESISTOR,CHIP 120 1/10W (1608)
R19	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R20	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R21	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R22	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R23	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R32	1-218-825-11	s	RESISTOR,CHIP 120 1/10W (1608)
R33	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R34	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R39	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R40	1-218-823-11	s	RESISTOR,CHIP 100 1/10W (1608)
R41	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R42	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(KY-527 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R43	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R44	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R45	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R46	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R47	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R48	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R49	1-218-825-11	s	RESISTOR,CHIP 120 1/10W (1608)
R50	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R51	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R52	1-218-825-11	s	RESISTOR,CHIP 120 1/10W (1608)
R53	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R54	1-218-825-11	s	RESISTOR,CHIP 120 1/10W (1608)
R55	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R56	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R57	1-211-985-11	s	RESISTOR,CHIP 47 1/10W (1608)
R58	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R59	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
R60	1-218-895-11	s	RESISTOR,CHIP 100K 1/10W(1608)
S1	1-692-892-21	s	SWITCH, TACTILE (WITH LIGHT)
S2	1-786-604-11	s	SWITCH, TACTILE
S3	1-692-890-21	s	SWITCH, TACTILE (WITH LIGHT)
S4	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S5	1-692-891-21	s	SWITCH, TACTILE (WITH LIGHT)
S6	1-786-605-11	s	SWITCH, TACTILE
S7	1-692-890-11	s	SWITCH, TACTILE
S8	1-786-605-11	s	SWITCH, TACTILE
S9	1-692-890-11	s	SWITCH, TACTILE
S10	1-786-605-11	s	SWITCH, TACTILE
S11	1-692-890-11	s	SWITCH, TACTILE
S12	1-786-604-11	s	SWITCH, TACTILE
S13	1-786-604-11	s	SWITCH, TACTILE
VDR1	1-801-925-11	s	VARISTOR, CHIP
VDR2	1-801-925-11	s	VARISTOR, CHIP
VDR3	1-801-925-11	s	VARISTOR, CHIP
VDR4	1-801-925-11	s	VARISTOR, CHIP
VDR5	1-801-925-11	s	VARISTOR, CHIP
VDR6	1-801-925-11	s	VARISTOR, CHIP
VDR7	1-801-925-11	s	VARISTOR, CHIP
VDR8	1-801-925-11	s	VARISTOR, CHIP
VDR9	1-801-925-11	s	VARISTOR, CHIP
VDR10	1-801-925-11	s	VARISTOR, CHIP
VDR11	1-801-925-11	s	VARISTOR, CHIP
VDR12	1-801-925-11	s	VARISTOR, CHIP
VDR13	1-801-925-11	s	VARISTOR, CHIP

LED-455 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-760-388-21	o	CONNECTOR PIN (SMD) 9P
D1	8-719-990-00	s	DIODE CL-150YG-CD-T
D2	8-719-990-00	s	DIODE CL-150YG-CD-T
D3	8-719-990-00	s	DIODE CL-150YG-CD-T
D4	8-719-990-00	s	DIODE CL-150YG-CD-T
D5	8-719-990-00	s	DIODE CL-150YG-CD-T
D6	8-719-990-00	s	DIODE CL-150YG-CD-T
D7	8-719-990-00	s	DIODE CL-150YG-CD-T
D8	8-719-990-00	s	DIODE CL-150YG-CD-T
D9	8-719-990-00	s	DIODE CL-150YG-CD-T
D10	8-719-990-00	s	DIODE CL-150YG-CD-T
D11	8-719-990-00	s	DIODE CL-150YG-CD-T
D12	8-719-990-00	s	DIODE CL-150YG-CD-T
D13	8-719-990-00	s	DIODE CL-150YG-CD-T
D14	8-719-990-00	s	DIODE CL-150YG-CD-T
D15	8-719-990-00	s	DIODE CL-150YG-CD-T
Q1	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q2	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q3	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R1	1-208-879-81	s	RES, CHIP 470 (1005)
R2	1-208-879-81	s	RES, CHIP 470 (1005)
R3	1-208-879-81	s	RES, CHIP 470 (1005)
R4	1-208-879-81	s	RES, CHIP 470 (1005)
R5	1-208-879-81	s	RES, CHIP 470 (1005)
R6	1-208-879-81	s	RES, CHIP 470 (1005)
R7	1-208-879-81	s	RES, CHIP 470 (1005)
R8	1-208-879-81	s	RES, CHIP 470 (1005)
R9	1-208-879-81	s	RES, CHIP 470 (1005)
R10	1-208-879-81	s	RES, CHIP 470 (1005)
R11	1-208-879-81	s	RES, CHIP 470 (1005)
R12	1-208-879-81	s	RES, CHIP 470 (1005)
R13	1-208-879-81	s	RES, CHIP 470 (1005)
R14	1-208-879-81	s	RES, CHIP 470 (1005)
R15	1-208-879-81	s	RES, CHIP 470 (1005)

LP-81 BOARD (SUFFIX 31)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8315-623-D	s	MOUNTED CIRCUIT BOARD, LP-81
1pc	3-171-508-06	s	HOLDER, LAMP
CN932	1-564-001-11	o	PIN, CONNECTOR 2P
D1	6-500-676-01	s	DIODE TLYE263AP(NP)
D2	6-500-676-01	s	DIODE TLYE263AP(NP)
D3	6-500-676-01	s	DIODE TLYE263AP(NP)
D4	6-500-676-01	s	DIODE TLYE263AP(NP)
D5	6-500-676-01	s	DIODE TLYE263AP(NP)
D6	6-500-676-01	s	DIODE TLYE263AP(NP)
D7	6-500-676-01	s	DIODE TLYE263AP(NP)
D8	6-500-676-01	s	DIODE TLYE263AP(NP)
D9	6-500-676-01	s	DIODE TLYE263AP(NP)
D10	6-500-676-01	s	DIODE TLYE263AP(NP)
R1	1-247-837-91	s	RES, CARBON (SMALL) 1.8K
R2	1-247-837-91	s	RES, CARBON (SMALL) 1.8K
R3	1-247-837-91	s	RES, CARBON (SMALL) 1.8K
R4	1-247-837-91	s	RES, CARBON (SMALL) 1.8K
R5	1-247-837-91	s	RES, CARBON (SMALL) 1.8K

LP-81 BOARD [SUFFIX 32]

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8315-623-E	s	MOUNTED CIRCUIT BOARD, LP-81
CN932	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
D1	6-502-196-01	s	DI SML-D12Y8WT86SP
D2	6-502-196-01	s	DI SML-D12Y8WT86SP
D3	6-502-196-01	s	DI SML-D12Y8WT86SP
D4	6-502-196-01	s	DI SML-D12Y8WT86SP
R1	1-218-855-91	s	RES, CHIP 2.2K (1608)
R2	1-218-855-91	s	RES, CHIP 2.2K (1608)
R3	1-218-855-91	s	RES, CHIP 2.2K (1608)
R4	1-218-855-91	s	RES, CHIP 2.2K (1608)

MB-1101 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-703-A	s	MOUNTED CIRCUIT BOARD, MB-1101
CN1	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN2	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN3	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN4	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN5	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN6	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN7	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN8	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN9	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN10	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN11	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN12	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN13	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN14	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN15	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN16	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN17	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN18	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN19	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN20	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN21	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN22	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN23	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN24	1-778-259-12	o	CONNECTOR, BOARD TO BOARD 148P
CN61	1-566-421-11	o	HEADER, CONNECTOR 50P
CN62	1-566-421-11	o	HEADER, CONNECTOR 50P
CN68	1-580-547-11	o	PIN, CONNECTOR (PC BOARD) 36P
CN69	1-770-308-11	o	HOUSING, CONNECTOR 48P
CN71	1-566-758-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN72	1-566-758-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN73	1-564-013-11	o	PIN, CONNECTOR 3P
CN74	1-564-013-11	o	PIN, CONNECTOR 3P
CN75	1-564-002-11	s	PIN, CONNECTOR 3P
CN76	1-564-002-11	s	PIN, CONNECTOR 3P
CN77	1-564-002-11	s	PIN, CONNECTOR 3P
CN78	1-564-002-11	s	PIN, CONNECTOR 3P
CN79	1-564-013-11	o	PIN, CONNECTOR 3P
CN100	1-819-789-11	s	PIN,CONNECTOR (24P)
Q1	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q2	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q3	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q4	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
R1	1-218-895-91	s	RES, CHIP 100K (1608)
R2	1-218-863-91	s	RES, CHIP 4.7K (1608)
R3	1-218-895-91	s	RES, CHIP 100K (1608)
R4	1-218-863-91	s	RES, CHIP 4.7K (1608)

MY-115 BOARD (HKSR-5804)

Ref. No. or Q'ty	Part No.	SP	Description
2pcs	⚠ 1-787-146-11	s	FAN, DC (SQUARE 30)
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
1pc	6-713-050-01	s	IC MT9VDDF6472Y335F1
6pcs	7-621-759-45	s	+PSW, 2.6X6
10pcs	7-682-947-01	s	SCREW +PSW 3X6
2pcs	7-682-953-01	s	SCREW +PSW 3X20
4pcs	7-685-547-19	s	SCREW +BTP 3X10 TYPE2 N-S
2pcs	7-688-005-02	s	W 5, SMALL
C101	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C151	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C153	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C154	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C155	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C156	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C157	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C158	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C159	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C160	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C161	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C162	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C163	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C164	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C165	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C166	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C167	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C168	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C169	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C170	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C171	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C172	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C173	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C174	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C175	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C176	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C177	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C178	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C185	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C186	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C187	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C188	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C193	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C194	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C195	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C196	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C197	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C198	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C199	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C213	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C214	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C215	1-165-989-91	s	CAP, CERAMIC 10MF (2012)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C216	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C217	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C218	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C219	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C220	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C244	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C421	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C704	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C705	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C713	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C714	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C715	1-162-919-91	s	CAP, CERAMIC 22PF CH 1608
C716	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C717	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C721	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C722	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C723	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C724	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C725	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C730	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C731	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C732	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C737	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C740	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C741	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C744	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C745	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C746	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C747	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C748	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C749	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C750	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C751	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C752	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C754	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C755	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C757	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C758	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C759	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C1002	1-114-238-91	s	CAP, CERAMIC 22MF B
C1003	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1203	1-100-986-21	s	CAP, ELECT 330MF
C1205	1-100-118-21	s	CAP, ELECT 82MF (8X7)
C1209	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C1211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1217	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1224	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1227	1-100-118-21	s	CAP, ELECT 82MF (8X7)
C1228	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C1231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1232	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1241	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1243	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1244	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1245	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1248	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1249	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1251	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1252	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1254	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1255	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C1269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1294	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1295	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1296	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1298	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C1300	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1302	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1303	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1304	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C1305	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1306	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C1307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1308	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C1309	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1312	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C1313	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1314	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1315	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1317	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1318	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1319	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1320	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1322	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2012	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2026	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2255	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2256	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2268	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2269	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2270	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2271	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2274	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2275	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2276	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2277	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2280	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2281	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2282	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2283	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C2286	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2287	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2288	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2289	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2297	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2300	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2305	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2306	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2307	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2308	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2309	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C2310	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C2350	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C2351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2352	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C2353	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2355	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2356	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C2357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2360	1-164-839-81	s	CAP,CHIP CERAMIC 0.5PF CK 1005
C2362	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2363	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2501	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2502	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2503	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2504	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2512	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2514	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2516	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2521	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2522	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2523	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2524	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2525	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2526	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2527	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C2528	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C2529	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2530	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C2531	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C2532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2543	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2546	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2551	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

Ref. No. or Q'ty	Part No.	SP	Description
C2555	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C2557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3276	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3277	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3278	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3279	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3280	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3281	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3510	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C3512	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C3513	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C3515	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C3516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3750	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C3751	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3752	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3753	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3754	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3755	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3756	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3757	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3758	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3760	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3761	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3763	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3764	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3765	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3767	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3768	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3769	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3770	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3771	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3773	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3774	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3775	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3777	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3778	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3779	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3781	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3782	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3785	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3787	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3788	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3789	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3791	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3794	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3795	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3797	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3798	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3799	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3801	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3806	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3807	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

Ref. No. or Q'ty	Part No.	SP	Description
C3810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3811	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3814	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3822	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3825	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3829	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3831	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3833	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3834	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3837	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3838	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3842	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3846	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3849	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3850	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3851	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3854	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C3855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3856	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3857	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C3869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3875	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3877	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3878	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3880	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3882	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3883	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3884	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3885	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3886	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3887	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3888	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3889	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3890	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3891	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3892	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3893	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3895	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3897	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3898	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3899	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3901	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3903	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3913	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3917	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3921	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3924	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3925	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3946	1-165-871-21	s	CAP, ELECT 22MF (4.0X5.5)
C3947	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3948	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3949	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C3950	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3951	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3952	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3953	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3954	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3955	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3956	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3957	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4250	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4251	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4252	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4253	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

Ref. No. or Q'ty	Part No.	SP	Description
C4254	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4256	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4257	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4258	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4259	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4260	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4261	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4262	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4263	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4264	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4265	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4266	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4267	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4268	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4275	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4276	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C4277	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C4278	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C4279	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C4280	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C4281	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C4282	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4283	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4284	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4285	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4286	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4287	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4288	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4289	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4290	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4291	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4292	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4293	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4753	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4754	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C4757	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C4758	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4759	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4760	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4761	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4762	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4763	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4764	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4765	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4766	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4767	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4768	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4769	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4770	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4771	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4772	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4773	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C4774	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4775	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4776	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4777	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4778	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4779	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4780	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4781	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4782	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4783	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4784	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4785	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4786	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4788	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4789	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4790	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4791	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4792	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4793	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4794	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4795	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4796	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4797	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C4798	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4799	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4803	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4805	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4810	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4813	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4815	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4817	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4819	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4821	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4823	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4825	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4827	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C4833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4835	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4837	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4839	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4841	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4842	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4847	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4848	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4849	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4850	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4851	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4852	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4855	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4857	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4858	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4859	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4860	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4861	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4863	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4865	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4867	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4869	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4870	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4871	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4872	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4873	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4874	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4878	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4879	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4880	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4881	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5000	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C5001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5006	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C5007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C5011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5022	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C5050	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5051	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5052	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C5053	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C5054	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5055	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C5056	1-115-416-91	s	CAP,CHIP CERAMIC1000PF CH 1608
C5057	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C6002	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C6003	1-100-827-21	s	CAP, ELECT 150MF (8X7)
C6004	1-162-928-91	s	CAP, CERAMIC 120PF CH 1608
C6007	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C6008	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C6009	1-100-827-21	s	CAP, ELECT 150MF (8X7)
C6010	1-162-928-91	s	CAP, CERAMIC 120PF CH 1608
C6013	1-131-997-21	s	CAP, ELECT 470MF (10X8)
C6016	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C6018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6021	1-131-996-21	s	CAP, ELECT 220MF (8X7)
C6024	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6026	1-100-276-21	s	CAP, ELECT 22MF (5.0X6.5)
C6029	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C6031	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6032	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6033	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6034	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6035	1-112-541-21	s	CAP, ELECT 10MF (4X5)
C6050	1-100-165-21	s	CAP, ELECT 47MF (8X7)
C6051	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6052	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6053	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6054	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6055	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C6056	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C6057	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C6058	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C6059	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C6060	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C6061	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C6062	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C6063	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C6064	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C6065	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C7000	1-165-903-21	s	CAP, ELECT 120MF (6.3X6)
C7001	1-135-348-21	s	CAP, ELECT 150MF (10X8)
C7002	1-114-099-21	s	CAP, ELECT 10MF (5X6)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
C7003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN700	1-817-292-11	s	JACK, MODULAR (WITH LED, PT)
CN1001	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN1002	1-764-099-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN5000	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN5010	1-566-758-11	o	PIN, CONNECTOR (PC BOARD) 3P
CN5011	1-566-758-11	o	PIN, CONNECTOR (PC BOARD) 3P
D400	8-719-069-28	s	DIODE 1SS400TE-61
D701	8-719-074-31	s	DIODE CL-196YG-CD-T
D702	8-719-074-31	s	DIODE CL-196YG-CD-T
D703	8-719-074-31	s	DIODE CL-196YG-CD-T
D704	8-719-074-31	s	DIODE CL-196YG-CD-T
D705	8-719-074-31	s	DIODE CL-196YG-CD-T
D706	8-719-074-31	s	DIODE CL-196YG-CD-T
D1201	8-719-066-98	s	DIODE RB051L-40TE25
D1203	8-719-938-77	s	DIODE SB05-05C-TB-E
D1204	8-719-938-77	s	DIODE SB05-05C-TB-E
D1205	8-719-066-98	s	DIODE RB051L-40TE25
D1400	8-719-077-09	s	DIODE CL-196HR-CD-T
D1401	8-719-074-31	s	DIODE CL-196YG-CD-T
D1402	8-719-074-31	s	DIODE CL-196YG-CD-T
D1403	8-719-074-31	s	DIODE CL-196YG-CD-T
D1404	8-719-074-31	s	DIODE CL-196YG-CD-T
D3000	8-719-074-31	s	DIODE CL-196YG-CD-T
D3001	8-719-074-31	s	DIODE CL-196YG-CD-T
D3002	8-719-077-09	s	DIODE CL-196HR-CD-T
D4500	8-719-074-31	s	DIODE CL-196YG-CD-T
D4501	8-719-074-31	s	DIODE CL-196YG-CD-T
D4502	8-719-077-09	s	DIODE CL-196HR-CD-T
D5000	8-719-074-31	s	DIODE CL-196YG-CD-T
D5001	8-719-074-31	s	DIODE CL-196YG-CD-T
D5002	8-719-077-09	s	DIODE CL-196HR-CD-T
E1400	1-535-877-22	s	CHIP, CHECKER
E1401	1-535-877-22	s	CHIP, CHECKER
E1402	1-535-877-22	s	CHIP, CHECKER
E1403	1-535-877-22	s	CHIP, CHECKER
E1404	1-535-877-22	s	CHIP, CHECKER
E1405	1-535-877-22	s	CHIP, CHECKER
E1406	1-535-877-22	s	CHIP, CHECKER
E1407	1-535-877-22	s	CHIP, CHECKER
E6000	1-535-877-22	s	CHIP, CHECKER
E6001	1-535-877-22	s	CHIP, CHECKER
E6002	1-535-877-22	s	CHIP, CHECKER
E6003	1-535-877-22	s	CHIP, CHECKER
E6004	1-535-877-22	s	CHIP, CHECKER
E6005	1-535-877-22	s	CHIP, CHECKER
E6006	1-535-877-22	s	CHIP, CHECKER
E6007	1-535-877-22	s	CHIP, CHECKER
F7000	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
F7001	⚠ 1-576-329-21	s	FUSE (SMD) (10A/125V)
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB701	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB702	1-469-324-21	s	FERRITE, EMI (SMD) (2012)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
FB703	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB704	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB705	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB706	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB707	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB708	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB709	1-469-324-21	s	FERRITE, EMI (SMD) (2012)
FB2500	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2501	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2502	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2503	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2505	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB2506	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3500	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3750	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3752	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3753	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3754	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3755	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3757	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3758	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3759	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3765	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB3766	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4750	1-412-363-21	s	FERRITE, EMI (SMD) (2012)
FB4751	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4752	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4753	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4754	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4755	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4756	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4757	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4758	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4759	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4761	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4762	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4763	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB4764	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB6002	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB6003	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB6004	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB6005	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB6006	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB6007	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB6008	1-400-382-21	s	EMI FERRITE (SMD) (1608)
FB6009	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB6010	1-400-580-21	s	FERRITE, EMI (SMD)
IC102	6-709-708-01	s	IC MT46V32M16P-6T:F
IC103	6-709-708-01	s	IC MT46V32M16P-6T:F
IC104	6-709-708-01	s	IC MT46V32M16P-6T:F
IC105	6-709-708-01	s	IC MT46V32M16P-6T:F
IC401	8-759-669-41	s	IC SN74LVC125APWR-12
IC404	8-759-573-97	s	IC SN74LVC541APWR
IC405	8-759-573-97	s	IC SN74LVC541APWR
IC406	8-759-573-97	s	IC SN74LVC541APWR
IC407	8-759-573-97	s	IC SN74LVC541APWR
IC408	6-701-994-01	s	IC SN74LVCH245APWR
IC409	6-701-994-01	s	IC SN74LVCH245APWR

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
IC410	6-701-994-01	s	IC SN74LVCH245APWR
IC411	6-701-994-01	s	IC SN74LVCH245APWR
IC414	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC603	6-700-419-01	s	IC CY7C024AV-25AXC
IC608	8-759-392-77	s	IC SN74LVC245APWR
IC609	8-759-573-97	s	IC SN74LVC541APWR
IC610	8-759-573-97	s	IC SN74LVC541APWR
IC611	8-759-573-97	s	IC SN74LVC541APWR
IC614	8-759-675-48	s	IC SN74LVC32APWR
IC615	8-759-675-47	s	IC SN74LVC04APWR
IC701	6-700-655-01	s	IC LT1963ES8#TR
IC703	8-759-549-01	s	IC SN74LV125APWR
IC1000	8-759-330-14	s	IC TL7700CPS-E20
IC1001	8-759-330-14	s	IC TL7700CPS-E20
IC1002	6-704-607-01	s	IC M24C16-WMN6T(B)
IC1004	8-759-679-55	s	IC SN74LVC08APWR
IC1005	8-759-679-54	s	IC SN74LVC14APWR
IC1006	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC1010	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC1201	8-759-597-57	s	IC LTC1628CG#TR
IC1202	6-707-035-01	s	IC LP2996MRX
IC1300	6-701-572-01	s	IC TPS54610PWPR
IC1301	8-759-330-14	s	IC TL7700CPS-E20
IC1400	8-759-481-11	s	IC SN74LVTH16244ADGGR
IC1401	6-708-277-01	s	IC CDCVF25081PWR
IC1402	8-759-524-22	s	IC TC74VHC175FT(EL)
IC1403	8-759-481-11	s	IC SN74LVTH16244ADGGR
IC1404	8-752-392-03	s	IC CXD1095BR
IC1501	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC1502	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC2000	6-702-547-11	s	IC SN65LVDS2DR
IC2002	8-759-386-26	s	IC 74LCX574MTCX
IC2003	6-708-277-01	s	IC CDCVF25081PWR
IC2004	6-702-547-11	s	IC SN65LVDS2DR
IC2006	6-708-277-01	s	IC CDCVF25081PWR
IC2008	8-759-573-97	s	IC SN74LVC541APWR
IC2009	8-759-573-97	s	IC SN74LVC541APWR
IC2010	8-759-573-97	s	IC SN74LVC541APWR
IC2011	8-759-392-77	s	IC SN74LVC245APWR
IC2012	8-759-573-97	s	IC SN74LVC541APWR
IC2013	8-759-573-97	s	IC SN74LVC541APWR
IC2014	8-759-573-97	s	IC SN74LVC541APWR
IC2015	6-701-994-01	s	IC SN74LVCH245APWR
IC2016	6-708-277-01	s	IC CDCVF25081PWR
IC2017	6-702-546-11	s	IC SN65LVDS1DR
IC2018	8-759-573-97	s	IC SN74LVC541APWR
IC2019	8-759-573-97	s	IC SN74LVC541APWR
IC2501	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2502	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2503	6-706-682-01	s	IC MC100LVELT22DR2
IC2505	6-706-682-01	s	IC MC100LVELT22DR2
IC2506	6-713-120-01	s	IC MC100EP210SFAG
IC3252	6-709-708-01	s	IC MT46V32M16P-6T:F
IC3253	6-709-708-01	s	IC MT46V32M16P-6T:F
IC3254	6-709-708-01	s	IC MT46V32M16P-6T:F
IC3255	6-709-708-01	s	IC MT46V32M16P-6T:F
IC5000	8-759-669-43	s	IC SN74LVC157APWR-12
IC5002	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC5004	8-759-669-43	s	IC SN74LVC157APWR-12

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
IC5005	8-759-573-97	s	IC SN74LVC541APWR
IC5012	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC5013	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IC5014	6-710-605-01	s	IC MAX1617AMEE+TG069
IC5015	6-710-605-01	s	IC MAX1617AMEE+TG069
IC6004	6-707-035-01	s	IC LP2996MRX
IC6005	6-707-035-01	s	IC LP2996MRX
IC6010	8-749-018-23	s	IC LT1764EQ-E2
L1202	1-400-161-21	s	INDUCTOR 1.2UH
L1203	1-400-161-21	s	INDUCTOR 1.2UH
L1205	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L1206	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L1207	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L1208	1-414-394-41	s	INDUCTOR (SMD) 2.2UH
L1300	1-416-949-21	s	COIL, CHOKE 15UH
L2252	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L2261	1-414-834-21	s	INDUCTOR, CHIP 3.3NH (1005)
L2350	1-414-457-21	s	INDUCTOR, CHIP (S) 3.3NH
L2353	1-414-834-21	s	INDUCTOR, CHIP 3.3NH (1005)
L5050	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L5051	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L7000	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L7001	1-400-806-21	s	INDUCTOR (3.5UH)
Q1001	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1201	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q1203	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q1204	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q1205	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q1206	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1207	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1210	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1211	6-550-750-01	s	TRANSISTOR SSM3K15FS-TE85L
Q1212	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q1400	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1401	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1402	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1403	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1404	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q2500	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2501	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2503	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q2504	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q5050	8-729-928-91	s	TRANSISTOR DTC114EE-TL
Q5051	8-729-928-91	s	TRANSISTOR DTC114EE-TL
R100	1-208-863-81	s	RES, CHIP 100 (1005)
R101	1-208-863-81	s	RES, CHIP 100 (1005)
R102	1-208-863-81	s	RES, CHIP 100 (1005)
R103	1-208-863-81	s	RES, CHIP 100 (1005)
R104	1-220-882-81	s	RES, CHIP 33 (1005)
R105	1-220-878-81	s	RES, CHIP 22 (1005)
R106	1-220-878-81	s	RES, CHIP 22 (1005)
R107	1-220-878-81	s	RES, CHIP 22 (1005)
R108	1-220-878-81	s	RES, CHIP 22 (1005)
R109	1-220-878-81	s	RES, CHIP 22 (1005)
R110	1-220-878-81	s	RES, CHIP 22 (1005)
R111	1-220-878-81	s	RES, CHIP 22 (1005)
R112	1-220-878-81	s	RES, CHIP 22 (1005)
R113	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R114	1-220-878-81	s	RES, CHIP 22 (1005)
R115	1-220-878-81	s	RES, CHIP 22 (1005)
R116	1-220-878-81	s	RES, CHIP 22 (1005)
R117	1-220-878-81	s	RES, CHIP 22 (1005)
R118	1-220-878-81	s	RES, CHIP 22 (1005)
R119	1-220-878-81	s	RES, CHIP 22 (1005)
R120	1-220-878-81	s	RES, CHIP 22 (1005)
R121	1-220-878-81	s	RES, CHIP 22 (1005)
R122	1-220-878-81	s	RES, CHIP 22 (1005)
R123	1-220-878-81	s	RES, CHIP 22 (1005)
R124	1-220-878-81	s	RES, CHIP 22 (1005)
R125	1-220-878-81	s	RES, CHIP 22 (1005)
R126	1-220-878-81	s	RES, CHIP 22 (1005)
R127	1-220-878-81	s	RES, CHIP 22 (1005)
R128	1-220-878-81	s	RES, CHIP 22 (1005)
R129	1-220-878-81	s	RES, CHIP 22 (1005)
R130	1-220-878-81	s	RES, CHIP 22 (1005)
R131	1-220-878-81	s	RES, CHIP 22 (1005)
R132	1-220-878-81	s	RES, CHIP 22 (1005)
R133	1-220-878-81	s	RES, CHIP 22 (1005)
R134	1-220-878-81	s	RES, CHIP 22 (1005)
R135	1-220-878-81	s	RES, CHIP 22 (1005)
R136	1-220-878-81	s	RES, CHIP 22 (1005)
R137	1-208-911-81	s	RES, CHIP 10K (1005)
R138	1-220-878-81	s	RES, CHIP 22 (1005)
R139	1-220-878-81	s	RES, CHIP 22 (1005)
R140	1-220-878-81	s	RES, CHIP 22 (1005)
R141	1-220-878-81	s	RES, CHIP 22 (1005)
R142	1-220-878-81	s	RES, CHIP 22 (1005)
R143	1-220-878-81	s	RES, CHIP 22 (1005)
R144	1-220-878-81	s	RES, CHIP 22 (1005)
R145	1-220-878-81	s	RES, CHIP 22 (1005)
R146	1-220-878-81	s	RES, CHIP 22 (1005)
R147	1-220-878-81	s	RES, CHIP 22 (1005)
R148	1-220-878-81	s	RES, CHIP 22 (1005)
R149	1-220-878-81	s	RES, CHIP 22 (1005)
R150	1-220-878-81	s	RES, CHIP 22 (1005)
R151	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R152	1-208-911-81	s	RES, CHIP 10K (1005)
R153	1-208-911-81	s	RES, CHIP 10K (1005)
R154	1-208-911-81	s	RES, CHIP 10K (1005)
R155	1-208-911-81	s	RES, CHIP 10K (1005)
R156	1-208-911-81	s	RES, CHIP 10K (1005)
R157	1-208-911-81	s	RES, CHIP 10K (1005)
R158	1-208-911-81	s	RES, CHIP 10K (1005)
R159	1-208-911-81	s	RES, CHIP 10K (1005)
R224	1-208-856-81	s	RES, CHIP 51 (1005)
R225	1-208-856-81	s	RES, CHIP 51 (1005)
R226	1-208-856-81	s	RES, CHIP 51 (1005)
R227	1-208-856-81	s	RES, CHIP 51 (1005)
R228	1-208-856-81	s	RES, CHIP 51 (1005)
R229	1-208-856-81	s	RES, CHIP 51 (1005)
R230	1-208-856-81	s	RES, CHIP 51 (1005)
R231	1-208-856-81	s	RES, CHIP 51 (1005)
R232	1-208-856-81	s	RES, CHIP 51 (1005)
R233	1-208-856-81	s	RES, CHIP 51 (1005)
R234	1-208-856-81	s	RES, CHIP 51 (1005)
R235	1-208-856-81	s	RES, CHIP 51 (1005)
R236	1-208-856-81	s	RES, CHIP 51 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R237	1-208-856-81	s	RES, CHIP 51 (1005)
R238	1-208-856-81	s	RES, CHIP 51 (1005)
R239	1-208-856-81	s	RES, CHIP 51 (1005)
R240	1-208-856-81	s	RES, CHIP 51 (1005)
R241	1-208-856-81	s	RES, CHIP 51 (1005)
R242	1-208-856-81	s	RES, CHIP 51 (1005)
R243	1-208-856-81	s	RES, CHIP 51 (1005)
R244	1-208-856-81	s	RES, CHIP 51 (1005)
R245	1-208-856-81	s	RES, CHIP 51 (1005)
R246	1-208-856-81	s	RES, CHIP 51 (1005)
R247	1-208-856-81	s	RES, CHIP 51 (1005)
R248	1-208-856-81	s	RES, CHIP 51 (1005)
R249	1-208-856-81	s	RES, CHIP 51 (1005)
R250	1-208-856-81	s	RES, CHIP 51 (1005)
R251	1-208-856-81	s	RES, CHIP 51 (1005)
R252	1-208-856-81	s	RES, CHIP 51 (1005)
R253	1-208-856-81	s	RES, CHIP 51 (1005)
R254	1-208-856-81	s	RES, CHIP 51 (1005)
R255	1-208-856-81	s	RES, CHIP 51 (1005)
R256	1-208-856-81	s	RES, CHIP 51 (1005)
R257	1-208-856-81	s	RES, CHIP 51 (1005)
R258	1-208-856-81	s	RES, CHIP 51 (1005)
R259	1-208-856-81	s	RES, CHIP 51 (1005)
R260	1-208-856-81	s	RES, CHIP 51 (1005)
R261	1-208-856-81	s	RES, CHIP 51 (1005)
R262	1-208-856-81	s	RES, CHIP 51 (1005)
R263	1-208-856-81	s	RES, CHIP 51 (1005)
R264	1-208-856-81	s	RES, CHIP 51 (1005)
R265	1-208-856-81	s	RES, CHIP 51 (1005)
R266	1-208-856-81	s	RES, CHIP 51 (1005)
R267	1-208-856-81	s	RES, CHIP 51 (1005)
R268	1-208-856-81	s	RES, CHIP 51 (1005)
R269	1-208-856-81	s	RES, CHIP 51 (1005)
R270	1-208-856-81	s	RES, CHIP 51 (1005)
R271	1-208-856-81	s	RES, CHIP 51 (1005)
R272	1-208-856-81	s	RES, CHIP 51 (1005)
R273	1-208-856-81	s	RES, CHIP 51 (1005)
R274	1-208-856-81	s	RES, CHIP 51 (1005)
R275	1-208-856-81	s	RES, CHIP 51 (1005)
R276	1-208-856-81	s	RES, CHIP 51 (1005)
R277	1-208-856-81	s	RES, CHIP 51 (1005)
R278	1-208-856-81	s	RES, CHIP 51 (1005)
R279	1-208-856-81	s	RES, CHIP 51 (1005)
R280	1-208-856-81	s	RES, CHIP 51 (1005)
R281	1-208-856-81	s	RES, CHIP 51 (1005)
R282	1-208-856-81	s	RES, CHIP 51 (1005)
R283	1-208-856-81	s	RES, CHIP 51 (1005)
R284	1-208-856-81	s	RES, CHIP 51 (1005)
R285	1-208-856-81	s	RES, CHIP 51 (1005)
R286	1-208-856-81	s	RES, CHIP 51 (1005)
R287	1-208-856-81	s	RES, CHIP 51 (1005)
R294	1-208-856-81	s	RES, CHIP 51 (1005)
R295	1-208-856-81	s	RES, CHIP 51 (1005)
R296	1-208-856-81	s	RES, CHIP 51 (1005)
R297	1-208-856-81	s	RES, CHIP 51 (1005)
R298	1-208-856-81	s	RES, CHIP 51 (1005)
R299	1-208-856-81	s	RES, CHIP 51 (1005)
R300	1-208-856-81	s	RES, CHIP 51 (1005)
R301	1-208-856-81	s	RES, CHIP 51 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R302	1-208-856-81	s	RES, CHIP 51 (1005)
R303	1-208-856-81	s	RES, CHIP 51 (1005)
R304	1-208-856-81	s	RES, CHIP 51 (1005)
R305	1-208-856-81	s	RES, CHIP 51 (1005)
R306	1-208-856-81	s	RES, CHIP 51 (1005)
R307	1-208-856-81	s	RES, CHIP 51 (1005)
R308	1-208-856-81	s	RES, CHIP 51 (1005)
R309	1-208-856-81	s	RES, CHIP 51 (1005)
R310	1-208-856-81	s	RES, CHIP 51 (1005)
R311	1-208-856-81	s	RES, CHIP 51 (1005)
R312	1-208-856-81	s	RES, CHIP 51 (1005)
R313	1-208-856-81	s	RES, CHIP 51 (1005)
R314	1-208-856-81	s	RES, CHIP 51 (1005)
R315	1-208-856-81	s	RES, CHIP 51 (1005)
R316	1-208-856-81	s	RES, CHIP 51 (1005)
R317	1-208-856-81	s	RES, CHIP 51 (1005)
R318	1-208-856-81	s	RES, CHIP 51 (1005)
R319	1-208-856-81	s	RES, CHIP 51 (1005)
R320	1-208-856-81	s	RES, CHIP 51 (1005)
R321	1-208-856-81	s	RES, CHIP 51 (1005)
R322	1-208-856-81	s	RES, CHIP 51 (1005)
R323	1-208-856-81	s	RES, CHIP 51 (1005)
R324	1-208-856-81	s	RES, CHIP 51 (1005)
R325	1-208-856-81	s	RES, CHIP 51 (1005)
R326	1-208-856-81	s	RES, CHIP 51 (1005)
R327	1-208-856-81	s	RES, CHIP 51 (1005)
R328	1-208-856-81	s	RES, CHIP 51 (1005)
R329	1-208-856-81	s	RES, CHIP 51 (1005)
R330	1-208-856-81	s	RES, CHIP 51 (1005)
R400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R401	1-220-882-81	s	RES, CHIP 33 (1005)
R402	1-220-878-81	s	RES, CHIP 22 (1005)
R403	1-220-878-81	s	RES, CHIP 22 (1005)
R404	1-220-878-81	s	RES, CHIP 22 (1005)
R405	1-208-911-81	s	RES, CHIP 10K (1005)
R406	1-220-882-81	s	RES, CHIP 33 (1005)
R407	1-208-911-81	s	RES, CHIP 10K (1005)
R408	1-208-911-81	s	RES, CHIP 10K (1005)
R409	1-220-882-81	s	RES, CHIP 33 (1005)
R410	1-220-882-81	s	RES, CHIP 33 (1005)
R411	1-220-882-81	s	RES, CHIP 33 (1005)
R412	1-220-882-81	s	RES, CHIP 33 (1005)
R413	1-220-882-81	s	RES, CHIP 33 (1005)
R414	1-220-882-81	s	RES, CHIP 33 (1005)
R415	1-220-882-81	s	RES, CHIP 33 (1005)
R416	1-220-882-81	s	RES, CHIP 33 (1005)
R417	1-208-911-81	s	RES, CHIP 10K (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-220-882-81	s	RES, CHIP 33 (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-208-919-81	s	RES, CHIP 22K (1005)
R423	1-208-919-81	s	RES, CHIP 22K (1005)
R424	1-208-919-81	s	RES, CHIP 22K (1005)
R425	1-208-919-81	s	RES, CHIP 22K (1005)
R427	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R428	1-208-887-81	s	RES, CHIP 1.0K (1005)
R429	1-208-927-81	s	RES, CHIP 47K (1005)
R430	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R431	1-208-927-81	s	RES, CHIP 47K (1005)
R432	1-208-903-81	s	RES, CHIP 4.7K (1005)
R433	1-208-927-81	s	RES, CHIP 47K (1005)
R434	1-208-903-81	s	RES, CHIP 4.7K (1005)
R435	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R436	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R437	1-208-927-81	s	RES, CHIP 47K (1005)
R438	1-208-855-81	s	RES, CHIP 47 (1005)
R439	1-208-855-81	s	RES, CHIP 47 (1005)
R440	1-220-882-81	s	RES, CHIP 33 (1005)
R441	1-220-882-81	s	RES, CHIP 33 (1005)
R442	1-220-882-81	s	RES, CHIP 33 (1005)
R443	1-220-882-81	s	RES, CHIP 33 (1005)
R444	1-220-882-81	s	RES, CHIP 33 (1005)
R445	1-220-882-81	s	RES, CHIP 33 (1005)
R446	1-220-882-81	s	RES, CHIP 33 (1005)
R447	1-220-882-81	s	RES, CHIP 33 (1005)
R448	1-220-882-81	s	RES, CHIP 33 (1005)
R449	1-220-882-81	s	RES, CHIP 33 (1005)
R450	1-208-855-81	s	RES, CHIP 47 (1005)
R451	1-220-882-81	s	RES, CHIP 33 (1005)
R452	1-220-882-81	s	RES, CHIP 33 (1005)
R453	1-208-855-81	s	RES, CHIP 47 (1005)
R454	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R456	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-220-878-81	s	RES, CHIP 22 (1005)
R458	1-220-878-81	s	RES, CHIP 22 (1005)
R459	1-220-878-81	s	RES, CHIP 22 (1005)
R460	1-220-878-81	s	RES, CHIP 22 (1005)
R461	1-220-878-81	s	RES, CHIP 22 (1005)
R462	1-220-878-81	s	RES, CHIP 22 (1005)
R463	1-220-878-81	s	RES, CHIP 22 (1005)
R464	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R465	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R466	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R467	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R468	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R469	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R470	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R471	1-208-911-81	s	RES, CHIP 10K (1005)
R472	1-208-911-81	s	RES, CHIP 10K (1005)
R473	1-208-911-81	s	RES, CHIP 10K (1005)
R474	1-208-911-81	s	RES, CHIP 10K (1005)
R475	1-208-911-81	s	RES, CHIP 10K (1005)
R476	1-208-911-81	s	RES, CHIP 10K (1005)
R477	1-208-911-81	s	RES, CHIP 10K (1005)
R478	1-208-911-81	s	RES, CHIP 10K (1005)
R479	1-208-911-81	s	RES, CHIP 10K (1005)
R480	1-208-911-81	s	RES, CHIP 10K (1005)
R481	1-208-911-81	s	RES, CHIP 10K (1005)
R482	1-208-911-81	s	RES, CHIP 10K (1005)
R483	1-208-911-81	s	RES, CHIP 10K (1005)
R484	1-208-911-81	s	RES, CHIP 10K (1005)
R485	1-208-911-81	s	RES, CHIP 10K (1005)
R486	1-208-911-81	s	RES, CHIP 10K (1005)
R487	1-208-911-81	s	RES, CHIP 10K (1005)
R488	1-208-911-81	s	RES, CHIP 10K (1005)
R489	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R490	1-208-911-81	s	RES, CHIP 10K (1005)
R491	1-208-911-81	s	RES, CHIP 10K (1005)
R492	1-208-911-81	s	RES, CHIP 10K (1005)
R493	1-208-911-81	s	RES, CHIP 10K (1005)
R494	1-208-911-81	s	RES, CHIP 10K (1005)
R495	1-208-911-81	s	RES, CHIP 10K (1005)
R496	1-208-911-81	s	RES, CHIP 10K (1005)
R497	1-208-911-81	s	RES, CHIP 10K (1005)
R498	1-208-911-81	s	RES, CHIP 10K (1005)
R499	1-208-911-81	s	RES, CHIP 10K (1005)
R500	1-208-911-81	s	RES, CHIP 10K (1005)
R501	1-208-911-81	s	RES, CHIP 10K (1005)
R502	1-208-911-81	s	RES, CHIP 10K (1005)
R503	1-208-911-81	s	RES, CHIP 10K (1005)
R504	1-208-911-81	s	RES, CHIP 10K (1005)
R505	1-208-911-81	s	RES, CHIP 10K (1005)
R506	1-208-911-81	s	RES, CHIP 10K (1005)
R507	1-208-911-81	s	RES, CHIP 10K (1005)
R508	1-208-911-81	s	RES, CHIP 10K (1005)
R509	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R510	1-220-882-81	s	RES, CHIP 33 (1005)
R511	1-220-882-81	s	RES, CHIP 33 (1005)
R512	1-220-882-81	s	RES, CHIP 33 (1005)
R513	1-220-882-81	s	RES, CHIP 33 (1005)
R514	1-220-882-81	s	RES, CHIP 33 (1005)
R515	1-220-882-81	s	RES, CHIP 33 (1005)
R516	1-220-882-81	s	RES, CHIP 33 (1005)
R517	1-220-882-81	s	RES, CHIP 33 (1005)
R518	1-220-882-81	s	RES, CHIP 33 (1005)
R519	1-220-882-81	s	RES, CHIP 33 (1005)
R520	1-220-882-81	s	RES, CHIP 33 (1005)
R521	1-220-882-81	s	RES, CHIP 33 (1005)
R522	1-220-882-81	s	RES, CHIP 33 (1005)
R523	1-220-882-81	s	RES, CHIP 33 (1005)
R524	1-220-882-81	s	RES, CHIP 33 (1005)
R525	1-220-882-81	s	RES, CHIP 33 (1005)
R526	1-220-882-81	s	RES, CHIP 33 (1005)
R527	1-220-882-81	s	RES, CHIP 33 (1005)
R528	1-220-882-81	s	RES, CHIP 33 (1005)
R529	1-220-882-81	s	RES, CHIP 33 (1005)
R530	1-220-882-81	s	RES, CHIP 33 (1005)
R531	1-220-882-81	s	RES, CHIP 33 (1005)
R532	1-220-882-81	s	RES, CHIP 33 (1005)
R533	1-220-882-81	s	RES, CHIP 33 (1005)
R534	1-220-882-81	s	RES, CHIP 33 (1005)
R535	1-220-882-81	s	RES, CHIP 33 (1005)
R536	1-220-882-81	s	RES, CHIP 33 (1005)
R537	1-220-882-81	s	RES, CHIP 33 (1005)
R538	1-220-882-81	s	RES, CHIP 33 (1005)
R539	1-220-882-81	s	RES, CHIP 33 (1005)
R540	1-220-882-81	s	RES, CHIP 33 (1005)
R541	1-220-882-81	s	RES, CHIP 33 (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-911-81	s	RES, CHIP 10K (1005)
R546	1-208-911-81	s	RES, CHIP 10K (1005)
R547	1-208-911-81	s	RES, CHIP 10K (1005)
R602	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R603	1-208-911-81	s	RES, CHIP 10K (1005)
R604	1-208-911-81	s	RES, CHIP 10K (1005)
R605	1-208-927-81	s	RES, CHIP 47K (1005)
R606	1-208-927-81	s	RES, CHIP 47K (1005)
R607	1-208-927-81	s	RES, CHIP 47K (1005)
R610	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R611	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R612	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R613	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R704	1-208-909-81	s	RES, CHIP 8.2K (1005)
R705	1-208-923-81	s	RES, CHIP 33K (1005)
R706	1-208-911-81	s	RES, CHIP 10K (1005)
R709	1-242-967-81	s	RES, CHIP 1.0 (1005)
R710	1-242-967-81	s	RES, CHIP 1.0 (1005)
R712	1-242-967-81	s	RES, CHIP 1.0 (1005)
R713	1-242-967-81	s	RES, CHIP 1.0 (1005)
R715	1-208-863-81	s	RES, CHIP 100 (1005)
R716	1-208-935-81	s	RES, CHIP 100K (1005)
R717	1-208-935-81	s	RES, CHIP 100K (1005)
R718	1-208-935-81	s	RES, CHIP 100K (1005)
R719	1-208-935-81	s	RES, CHIP 100K (1005)
R720	1-208-935-81	s	RES, CHIP 100K (1005)
R721	1-208-935-81	s	RES, CHIP 100K (1005)
R722	1-208-935-81	s	RES, CHIP 100K (1005)
R723	1-208-911-81	s	RES, CHIP 10K (1005)
R725	1-220-870-81	s	RES, CHIP 10 (1005)
R726	1-220-870-81	s	RES, CHIP 10 (1005)
R727	1-220-870-81	s	RES, CHIP 10 (1005)
R728	1-220-870-81	s	RES, CHIP 10 (1005)
R729	1-220-870-81	s	RES, CHIP 10 (1005)
R730	1-220-870-81	s	RES, CHIP 10 (1005)
R731	1-220-870-81	s	RES, CHIP 10 (1005)
R732	1-220-870-81	s	RES, CHIP 10 (1005)
R733	1-220-870-81	s	RES, CHIP 10 (1005)
R734	1-220-870-81	s	RES, CHIP 10 (1005)
R735	1-220-870-81	s	RES, CHIP 10 (1005)
R736	1-220-870-81	s	RES, CHIP 10 (1005)
R737	1-220-870-81	s	RES, CHIP 10 (1005)
R738	1-220-870-81	s	RES, CHIP 10 (1005)
R739	1-220-870-81	s	RES, CHIP 10 (1005)
R740	1-220-870-81	s	RES, CHIP 10 (1005)
R741	1-220-870-81	s	RES, CHIP 10 (1005)
R742	1-220-870-81	s	RES, CHIP 10 (1005)
R743	1-220-870-81	s	RES, CHIP 10 (1005)
R744	1-220-870-81	s	RES, CHIP 10 (1005)
R745	1-220-870-81	s	RES, CHIP 10 (1005)
R746	1-220-870-81	s	RES, CHIP 10 (1005)
R747	1-220-870-81	s	RES, CHIP 10 (1005)
R748	1-220-870-81	s	RES, CHIP 10 (1005)
R749	1-220-870-81	s	RES, CHIP 10 (1005)
R750	1-220-870-81	s	RES, CHIP 10 (1005)
R751	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R752	1-220-878-81	s	RES, CHIP 22 (1005)
R753	1-208-903-81	s	RES, CHIP 4.7K (1005)
R754	1-208-903-81	s	RES, CHIP 4.7K (1005)
R755	1-208-911-81	s	RES, CHIP 10K (1005)
R756	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R757	1-208-903-81	s	RES, CHIP 4.7K (1005)
R758	1-208-903-81	s	RES, CHIP 4.7K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R759	1-208-911-81	s	RES, CHIP 10K (1005)
R760	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R761	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R762	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R763	1-208-959-81	s	RES, CHIP 1M (1005)
R764	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R765	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R766	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R767	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R768	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R769	1-208-871-81	s	RES, CHIP 220 (1005)
R770	1-208-871-81	s	RES, CHIP 220 (1005)
R771	1-208-871-81	s	RES, CHIP 220 (1005)
R772	1-208-871-81	s	RES, CHIP 220 (1005)
R773	1-208-871-81	s	RES, CHIP 220 (1005)
R774	1-208-871-81	s	RES, CHIP 220 (1005)
R775	1-208-856-81	s	RES, CHIP 51 (1005)
R776	1-208-856-81	s	RES, CHIP 51 (1005)
R777	1-208-856-81	s	RES, CHIP 51 (1005)
R778	1-208-856-81	s	RES, CHIP 51 (1005)
R779	1-208-856-81	s	RES, CHIP 51 (1005)
R780	1-208-856-81	s	RES, CHIP 51 (1005)
R781	1-208-856-81	s	RES, CHIP 51 (1005)
R782	1-208-856-81	s	RES, CHIP 51 (1005)
R783	1-208-856-81	s	RES, CHIP 51 (1005)
R784	1-208-856-81	s	RES, CHIP 51 (1005)
R785	1-208-875-81	s	RES, CHIP 330 (1005)
R786	1-208-875-81	s	RES, CHIP 330 (1005)
R787	1-208-911-81	s	RES, CHIP 10K (1005)
R788	1-208-903-81	s	RES, CHIP 4.7K (1005)
R928	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R929	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R931	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R937	1-208-903-81	s	RES, CHIP 4.7K (1005)
R938	1-208-903-81	s	RES, CHIP 4.7K (1005)
R939	1-208-903-81	s	RES, CHIP 4.7K (1005)
R940	1-208-903-81	s	RES, CHIP 4.7K (1005)
R941	1-208-903-81	s	RES, CHIP 4.7K (1005)
R942	1-208-903-81	s	RES, CHIP 4.7K (1005)
R943	1-208-903-81	s	RES, CHIP 4.7K (1005)
R944	1-208-903-81	s	RES, CHIP 4.7K (1005)
R945	1-208-903-81	s	RES, CHIP 4.7K (1005)
R946	1-208-903-81	s	RES, CHIP 4.7K (1005)
R947	1-208-903-81	s	RES, CHIP 4.7K (1005)
R948	1-208-903-81	s	RES, CHIP 4.7K (1005)
R949	1-208-903-81	s	RES, CHIP 4.7K (1005)
R950	1-220-878-81	s	RES, CHIP 22 (1005)
R1000	1-208-935-81	s	RES, CHIP 100K (1005)
R1001	1-208-943-81	s	RES, CHIP 220K (1005)
R1003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1004	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1005	1-208-911-81	s	RES, CHIP 10K (1005)
R1006	1-208-943-81	s	RES, CHIP 220K (1005)
R1007	1-208-943-81	s	RES, CHIP 220K (1005)
R1008	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1011	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R1012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1014	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1015	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1016	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1017	1-208-911-81	s	RES, CHIP 10K (1005)
R1019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1020	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1026	1-208-935-81	s	RES, CHIP 100K (1005)
R1027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1029	1-208-911-81	s	RES, CHIP 10K (1005)
R1030	1-208-911-81	s	RES, CHIP 10K (1005)
R1033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1034	1-208-911-81	s	RES, CHIP 10K (1005)
R1035	1-208-911-81	s	RES, CHIP 10K (1005)
R1037	1-208-911-81	s	RES, CHIP 10K (1005)
R1038	1-208-911-81	s	RES, CHIP 10K (1005)
R1041	1-208-911-81	s	RES, CHIP 10K (1005)
R1042	1-208-911-81	s	RES, CHIP 10K (1005)
R1043	1-208-911-81	s	RES, CHIP 10K (1005)
R1044	1-208-911-81	s	RES, CHIP 10K (1005)
R1045	1-208-911-81	s	RES, CHIP 10K (1005)
R1046	1-208-911-81	s	RES, CHIP 10K (1005)
R1047	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1048	1-208-911-81	s	RES, CHIP 10K (1005)
R1049	1-208-927-81	s	RES, CHIP 47K (1005)
R1050	1-208-911-81	s	RES, CHIP 10K (1005)
R1051	1-208-911-81	s	RES, CHIP 10K (1005)
R1052	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1053	1-208-911-81	s	RES, CHIP 10K (1005)
R1054	1-208-911-81	s	RES, CHIP 10K (1005)
R1055	1-208-911-81	s	RES, CHIP 10K (1005)
R1056	1-208-911-81	s	RES, CHIP 10K (1005)
R1057	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1059	1-208-911-81	s	RES, CHIP 10K (1005)
R1060	1-208-911-81	s	RES, CHIP 10K (1005)
R1061	1-208-911-81	s	RES, CHIP 10K (1005)
R1062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1065	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1068	1-208-911-81	s	RES, CHIP 10K (1005)
R1069	1-208-911-81	s	RES, CHIP 10K (1005)
R1071	1-208-911-81	s	RES, CHIP 10K (1005)
R1072	1-208-911-81	s	RES, CHIP 10K (1005)
R1073	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1074	1-208-911-81	s	RES, CHIP 10K (1005)
R1076	1-208-911-81	s	RES, CHIP 10K (1005)
R1077	1-208-911-81	s	RES, CHIP 10K (1005)
R1078	1-208-911-81	s	RES, CHIP 10K (1005)
R1079	1-208-911-81	s	RES, CHIP 10K (1005)
R1080	1-208-911-81	s	RES, CHIP 10K (1005)
R1081	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R1082	1-208-911-81	s	RES, CHIP 10K (1005)
R1084	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1085	1-208-911-81	s	RES, CHIP 10K (1005)
R1086	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1087	1-208-911-81	s	RES, CHIP 10K (1005)
R1089	1-208-911-81	s	RES, CHIP 10K (1005)
R1090	1-208-911-81	s	RES, CHIP 10K (1005)
R1091	1-208-894-81	s	RES, CHIP 2.0K (1005)
R1092	1-208-911-81	s	RES, CHIP 10K (1005)
R1093	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1095	1-208-911-81	s	RES, CHIP 10K (1005)
R1097	1-208-911-81	s	RES, CHIP 10K (1005)
R1098	1-220-878-81	s	RES, CHIP 22 (1005)
R1099	1-220-878-81	s	RES, CHIP 22 (1005)
R1100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1101	1-208-935-81	s	RES, CHIP 100K (1005)
R1102	1-208-919-81	s	RES, CHIP 22K (1005)
R1103	1-208-935-81	s	RES, CHIP 100K (1005)
R1104	1-208-935-81	s	RES, CHIP 100K (1005)
R1105	1-208-935-81	s	RES, CHIP 100K (1005)
R1106	1-208-935-81	s	RES, CHIP 100K (1005)
R1107	1-208-935-81	s	RES, CHIP 100K (1005)
R1108	1-208-935-81	s	RES, CHIP 100K (1005)
R1109	1-208-935-81	s	RES, CHIP 100K (1005)
R1110	1-208-935-81	s	RES, CHIP 100K (1005)
R1111	1-208-935-81	s	RES, CHIP 100K (1005)
R1112	1-208-935-81	s	RES, CHIP 100K (1005)
R1203	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1204	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1205	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1208	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1209	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1213	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1214	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1215	1-208-895-81	s	RES, CHIP 2.2K (1005)
R1217	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1221	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1222	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1223	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1224	1-208-911-81	s	RES, CHIP 10K (1005)
R1225	1-208-918-81	s	RES, CHIP 20K (1005)
R1226	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1227	1-242-967-81	s	RES, CHIP 1.0 (1005)
R1228	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1229	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1230	1-219-684-21	s	RES, CHIP (SQUARE TYPE) 0.01
R1231	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1233	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1234	1-208-880-81	s	RES, CHIP 510 (1005)
R1235	1-208-880-81	s	RES, CHIP 510 (1005)
R1236	1-208-880-81	s	RES, CHIP 510 (1005)
R1237	1-208-880-81	s	RES, CHIP 510 (1005)
R1238	1-208-880-81	s	RES, CHIP 510 (1005)
R1239	1-208-880-81	s	RES, CHIP 510 (1005)
R1240	1-208-880-81	s	RES, CHIP 510 (1005)
R1241	1-208-880-81	s	RES, CHIP 510 (1005)
R1242	1-208-880-81	s	RES, CHIP 510 (1005)
R1243	1-208-880-81	s	RES, CHIP 510 (1005)
R1244	1-208-880-81	s	RES, CHIP 510 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R1245	1-208-880-81	s	RES, CHIP 510 (1005)
R1246	1-208-880-81	s	RES, CHIP 510 (1005)
R1247	1-208-880-81	s	RES, CHIP 510 (1005)
R1248	1-208-880-81	s	RES, CHIP 510 (1005)
R1249	1-208-880-81	s	RES, CHIP 510 (1005)
R1250	1-208-880-81	s	RES, CHIP 510 (1005)
R1251	1-208-880-81	s	RES, CHIP 510 (1005)
R1252	1-208-880-81	s	RES, CHIP 510 (1005)
R1253	1-208-880-81	s	RES, CHIP 510 (1005)
R1254	1-208-880-81	s	RES, CHIP 510 (1005)
R1255	1-208-880-81	s	RES, CHIP 510 (1005)
R1257	1-208-935-81	s	RES, CHIP 100K (1005)
R1258	1-208-935-81	s	RES, CHIP 100K (1005)
R1262	1-208-855-81	s	RES, CHIP 47 (1005)
R1263	1-208-935-81	s	RES, CHIP 100K (1005)
R1264	1-208-911-81	s	RES, CHIP 10K (1005)
R1265	1-208-911-81	s	RES, CHIP 10K (1005)
R1266	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1300	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1302	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1303	1-208-911-81	s	RES, CHIP 10K (1005)
R1304	1-208-879-81	s	RES, CHIP 470 (1005)
R1305	1-208-879-81	s	RES, CHIP 470 (1005)
R1306	1-208-903-81	s	RES, CHIP 4.7K (1005)
R1307	1-208-865-81	s	RES, CHIP 120 (1005)
R1308	1-208-919-81	s	RES, CHIP 22K (1005)
R1309	1-208-911-81	s	RES, CHIP 10K (1005)
R1310	1-208-911-81	s	RES, CHIP 10K (1005)
R1311	1-208-911-81	s	RES, CHIP 10K (1005)
R1312	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1313	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1314	1-208-911-81	s	RES, CHIP 10K (1005)
R1315	1-208-911-81	s	RES, CHIP 10K (1005)
R1316	1-208-935-81	s	RES, CHIP 100K (1005)
R1400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1404	1-208-911-81	s	RES, CHIP 10K (1005)
R1407	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1410	1-220-878-81	s	RES, CHIP 22 (1005)
R1412	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1413	1-220-882-81	s	RES, CHIP 33 (1005)
R1414	1-220-882-81	s	RES, CHIP 33 (1005)
R1415	1-220-882-81	s	RES, CHIP 33 (1005)
R1416	1-220-882-81	s	RES, CHIP 33 (1005)
R1417	1-220-882-81	s	RES, CHIP 33 (1005)
R1418	1-220-882-81	s	RES, CHIP 33 (1005)
R1419	1-220-882-81	s	RES, CHIP 33 (1005)
R1420	1-208-911-81	s	RES, CHIP 10K (1005)
R1430	1-220-882-81	s	RES, CHIP 33 (1005)
R1431	1-220-882-81	s	RES, CHIP 33 (1005)
R1440	1-208-867-81	s	RES, CHIP 150 (1005)
R1441	1-208-867-81	s	RES, CHIP 150 (1005)
R1442	1-208-867-81	s	RES, CHIP 150 (1005)
R1443	1-208-867-81	s	RES, CHIP 150 (1005)
R1444	1-208-867-81	s	RES, CHIP 150 (1005)
R1446	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1447	1-208-887-81	s	RES, CHIP 1.0K (1005)
R1448	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R1449	1-208-911-81	s	RES, CHIP 10K (1005)
R1450	1-220-878-81	s	RES, CHIP 22 (1005)
R1451	1-220-878-81	s	RES, CHIP 22 (1005)
R1452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2000	1-208-855-81	s	RES, CHIP 47 (1005)
R2001	1-208-855-81	s	RES, CHIP 47 (1005)
R2003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2005	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2006	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2007	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2008	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2015	1-208-855-81	s	RES, CHIP 47 (1005)
R2016	1-208-855-81	s	RES, CHIP 47 (1005)
R2017	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2018	1-245-748-11	s	RES, METAL FILM(SMD) 22 (1005)
R2019	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2020	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2021	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2024	1-220-870-81	s	RES, CHIP 10 (1005)
R2025	1-220-870-81	s	RES, CHIP 10 (1005)
R2026	1-220-870-81	s	RES, CHIP 10 (1005)
R2027	1-220-870-81	s	RES, CHIP 10 (1005)
R2028	1-220-870-81	s	RES, CHIP 10 (1005)
R2029	1-220-870-81	s	RES, CHIP 10 (1005)
R2030	1-220-870-81	s	RES, CHIP 10 (1005)
R2031	1-220-870-81	s	RES, CHIP 10 (1005)
R2032	1-220-870-81	s	RES, CHIP 10 (1005)
R2033	1-220-870-81	s	RES, CHIP 10 (1005)
R2034	1-220-870-81	s	RES, CHIP 10 (1005)
R2035	1-220-870-81	s	RES, CHIP 10 (1005)
R2036	1-220-870-81	s	RES, CHIP 10 (1005)
R2037	1-220-870-81	s	RES, CHIP 10 (1005)
R2038	1-220-870-81	s	RES, CHIP 10 (1005)
R2039	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2041	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2042	1-245-828-11	s	RES, METAL FILM(SMD) 1K (1005)
R2043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2046	1-220-870-81	s	RES, CHIP 10 (1005)
R2047	1-220-870-81	s	RES, CHIP 10 (1005)
R2050	1-208-855-81	s	RES, CHIP 47 (1005)
R2051	1-208-855-81	s	RES, CHIP 47 (1005)
R2052	1-220-870-81	s	RES, CHIP 10 (1005)
R2053	1-220-870-81	s	RES, CHIP 10 (1005)
R2054	1-208-855-81	s	RES, CHIP 47 (1005)
R2055	1-208-855-81	s	RES, CHIP 47 (1005)
R2056	1-220-878-81	s	RES, CHIP 22 (1005)
R2057	1-220-878-81	s	RES, CHIP 22 (1005)
R2058	1-220-878-81	s	RES, CHIP 22 (1005)
R2261	1-208-859-81	s	RES, CHIP 68 (1005)
R2262	1-220-884-81	s	RES, CHIP 39 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R2265	1-208-859-81	s	RES, CHIP 68 (1005)
R2269	1-208-863-81	s	RES, CHIP 100 (1005)
R2274	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2278	1-208-875-81	s	RES, CHIP 330 (1005)
R2279	1-208-875-81	s	RES, CHIP 330 (1005)
R2281	1-208-875-81	s	RES, CHIP 330 (1005)
R2282	1-208-875-81	s	RES, CHIP 330 (1005)
R2284	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2285	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2286	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2287	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2290	1-220-878-81	s	RES, CHIP 22 (1005)
R2291	1-220-878-81	s	RES, CHIP 22 (1005)
R2292	1-220-878-81	s	RES, CHIP 22 (1005)
R2293	1-220-878-81	s	RES, CHIP 22 (1005)
R2296	1-208-855-81	s	RES, CHIP 47 (1005)
R2297	1-208-855-81	s	RES, CHIP 47 (1005)
R2299	1-208-855-81	s	RES, CHIP 47 (1005)
R2300	1-208-855-81	s	RES, CHIP 47 (1005)
R2302	1-208-884-81	s	RES, CHIP 750 (1005)
R2307	1-208-860-81	s	RES, CHIP 75 (1005)
R2310	1-208-860-81	s	RES, CHIP 75 (1005)
R2315	1-208-861-81	s	RES, CHIP 82 (1005)
R2316	1-208-860-81	s	RES, CHIP 75 (1005)
R2322	1-208-860-81	s	RES, CHIP 75 (1005)
R2350	1-208-859-81	s	RES, CHIP 68 (1005)
R2354	1-208-859-81	s	RES, CHIP 68 (1005)
R2355	1-208-863-81	s	RES, CHIP 100 (1005)
R2356	1-220-884-81	s	RES, CHIP 39 (1005)
R2358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2360	1-208-884-81	s	RES, CHIP 750 (1005)
R2361	1-208-860-81	s	RES, CHIP 75 (1005)
R2362	1-208-860-81	s	RES, CHIP 75 (1005)
R2363	1-208-861-81	s	RES, CHIP 82 (1005)
R2364	1-208-860-81	s	RES, CHIP 75 (1005)
R2366	1-208-860-81	s	RES, CHIP 75 (1005)
R2367	1-208-911-81	s	RES, CHIP 10K (1005)
R2368	1-208-911-81	s	RES, CHIP 10K (1005)
R2500	1-208-866-81	s	RES, CHIP 130 (1005)
R2501	1-208-861-81	s	RES, CHIP 82 (1005)
R2502	1-208-866-81	s	RES, CHIP 130 (1005)
R2503	1-208-861-81	s	RES, CHIP 82 (1005)
R2505	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2507	1-208-911-81	s	RES, CHIP 10K (1005)
R2508	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2509	1-208-869-81	s	RES, CHIP 180 (1005)
R2510	1-208-911-81	s	RES, CHIP 10K (1005)
R2511	1-208-911-81	s	RES, CHIP 10K (1005)
R2512	1-208-911-81	s	RES, CHIP 10K (1005)
R2513	1-220-878-81	s	RES, CHIP 22 (1005)
R2515	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2517	1-208-863-81	s	RES, CHIP 100 (1005)
R2518	1-208-863-81	s	RES, CHIP 100 (1005)
R2520	1-208-911-81	s	RES, CHIP 10K (1005)
R2521	1-208-911-81	s	RES, CHIP 10K (1005)
R2523	1-220-878-81	s	RES, CHIP 22 (1005)
R2524	1-220-878-81	s	RES, CHIP 22 (1005)
R2527	1-218-871-91	s	RES, CHIP 10K (1608)
R2528	1-218-857-91	s	RES, CHIP 2.7K (1608)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R3000	1-208-863-81	s	RES, CHIP 100 (1005)
R3001	1-208-863-81	s	RES, CHIP 100 (1005)
R3002	1-208-863-81	s	RES, CHIP 100 (1005)
R3003	1-208-869-81	s	RES, CHIP 180 (1005)
R3004	1-208-869-81	s	RES, CHIP 180 (1005)
R3005	1-208-869-81	s	RES, CHIP 180 (1005)
R3250	1-220-878-81	s	RES, CHIP 22 (1005)
R3251	1-220-878-81	s	RES, CHIP 22 (1005)
R3252	1-220-878-81	s	RES, CHIP 22 (1005)
R3253	1-220-878-81	s	RES, CHIP 22 (1005)
R3254	1-220-878-81	s	RES, CHIP 22 (1005)
R3255	1-220-878-81	s	RES, CHIP 22 (1005)
R3256	1-220-878-81	s	RES, CHIP 22 (1005)
R3257	1-220-878-81	s	RES, CHIP 22 (1005)
R3258	1-220-882-81	s	RES, CHIP 33 (1005)
R3259	1-220-882-81	s	RES, CHIP 33 (1005)
R3260	1-220-882-81	s	RES, CHIP 33 (1005)
R3261	1-220-882-81	s	RES, CHIP 33 (1005)
R3262	1-220-882-81	s	RES, CHIP 33 (1005)
R3263	1-220-882-81	s	RES, CHIP 33 (1005)
R3264	1-220-882-81	s	RES, CHIP 33 (1005)
R3265	1-220-882-81	s	RES, CHIP 33 (1005)
R3266	1-220-882-81	s	RES, CHIP 33 (1005)
R3267	1-220-882-81	s	RES, CHIP 33 (1005)
R3268	1-220-882-81	s	RES, CHIP 33 (1005)
R3269	1-220-882-81	s	RES, CHIP 33 (1005)
R3270	1-220-882-81	s	RES, CHIP 33 (1005)
R3271	1-220-882-81	s	RES, CHIP 33 (1005)
R3272	1-220-882-81	s	RES, CHIP 33 (1005)
R3273	1-220-882-81	s	RES, CHIP 33 (1005)
R3274	1-220-882-81	s	RES, CHIP 33 (1005)
R3275	1-220-882-81	s	RES, CHIP 33 (1005)
R3276	1-220-882-81	s	RES, CHIP 33 (1005)
R3277	1-220-882-81	s	RES, CHIP 33 (1005)
R3278	1-220-882-81	s	RES, CHIP 33 (1005)
R3279	1-220-882-81	s	RES, CHIP 33 (1005)
R3280	1-220-882-81	s	RES, CHIP 33 (1005)
R3281	1-220-882-81	s	RES, CHIP 33 (1005)
R3282	1-220-882-81	s	RES, CHIP 33 (1005)
R3283	1-220-882-81	s	RES, CHIP 33 (1005)
R3284	1-220-882-81	s	RES, CHIP 33 (1005)
R3285	1-220-882-81	s	RES, CHIP 33 (1005)
R3286	1-208-855-81	s	RES, CHIP 47 (1005)
R3287	1-208-855-81	s	RES, CHIP 47 (1005)
R3288	1-208-855-81	s	RES, CHIP 47 (1005)
R3289	1-208-855-81	s	RES, CHIP 47 (1005)
R3290	1-208-855-81	s	RES, CHIP 47 (1005)
R3291	1-208-855-81	s	RES, CHIP 47 (1005)
R3292	1-208-855-81	s	RES, CHIP 47 (1005)
R3293	1-208-855-81	s	RES, CHIP 47 (1005)
R3294	1-208-855-81	s	RES, CHIP 47 (1005)
R3295	1-208-855-81	s	RES, CHIP 47 (1005)
R3296	1-208-855-81	s	RES, CHIP 47 (1005)
R3297	1-208-855-81	s	RES, CHIP 47 (1005)
R3298	1-208-855-81	s	RES, CHIP 47 (1005)
R3299	1-208-855-81	s	RES, CHIP 47 (1005)
R3300	1-208-855-81	s	RES, CHIP 47 (1005)
R3301	1-208-855-81	s	RES, CHIP 47 (1005)
R3302	1-208-855-81	s	RES, CHIP 47 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R3303	1-208-855-81	s	RES, CHIP 47 (1005)
R3304	1-208-855-81	s	RES, CHIP 47 (1005)
R3305	1-208-855-81	s	RES, CHIP 47 (1005)
R3306	1-208-855-81	s	RES, CHIP 47 (1005)
R3307	1-208-855-81	s	RES, CHIP 47 (1005)
R3308	1-208-855-81	s	RES, CHIP 47 (1005)
R3309	1-208-855-81	s	RES, CHIP 47 (1005)
R3310	1-208-855-81	s	RES, CHIP 47 (1005)
R3311	1-208-855-81	s	RES, CHIP 47 (1005)
R3312	1-208-855-81	s	RES, CHIP 47 (1005)
R3313	1-208-855-81	s	RES, CHIP 47 (1005)
R3314	1-208-855-81	s	RES, CHIP 47 (1005)
R3315	1-208-855-81	s	RES, CHIP 47 (1005)
R3316	1-208-855-81	s	RES, CHIP 47 (1005)
R3317	1-208-855-81	s	RES, CHIP 47 (1005)
R3318	1-208-855-81	s	RES, CHIP 47 (1005)
R3319	1-208-855-81	s	RES, CHIP 47 (1005)
R3320	1-208-855-81	s	RES, CHIP 47 (1005)
R3321	1-208-855-81	s	RES, CHIP 47 (1005)
R3322	1-208-855-81	s	RES, CHIP 47 (1005)
R3323	1-208-855-81	s	RES, CHIP 47 (1005)
R3324	1-208-855-81	s	RES, CHIP 47 (1005)
R3325	1-208-855-81	s	RES, CHIP 47 (1005)
R3326	1-208-855-81	s	RES, CHIP 47 (1005)
R3327	1-208-855-81	s	RES, CHIP 47 (1005)
R3328	1-208-855-81	s	RES, CHIP 47 (1005)
R3329	1-208-855-81	s	RES, CHIP 47 (1005)
R3330	1-208-855-81	s	RES, CHIP 47 (1005)
R3331	1-208-855-81	s	RES, CHIP 47 (1005)
R3332	1-208-855-81	s	RES, CHIP 47 (1005)
R3333	1-208-855-81	s	RES, CHIP 47 (1005)
R3334	1-208-855-81	s	RES, CHIP 47 (1005)
R3335	1-208-855-81	s	RES, CHIP 47 (1005)
R3336	1-208-855-81	s	RES, CHIP 47 (1005)
R3337	1-208-855-81	s	RES, CHIP 47 (1005)
R3338	1-208-855-81	s	RES, CHIP 47 (1005)
R3339	1-208-855-81	s	RES, CHIP 47 (1005)
R3340	1-208-855-81	s	RES, CHIP 47 (1005)
R3341	1-208-855-81	s	RES, CHIP 47 (1005)
R3342	1-208-855-81	s	RES, CHIP 47 (1005)
R3343	1-208-855-81	s	RES, CHIP 47 (1005)
R3344	1-208-855-81	s	RES, CHIP 47 (1005)
R3345	1-208-855-81	s	RES, CHIP 47 (1005)
R3346	1-208-855-81	s	RES, CHIP 47 (1005)
R3347	1-208-855-81	s	RES, CHIP 47 (1005)
R3348	1-208-855-81	s	RES, CHIP 47 (1005)
R3349	1-208-855-81	s	RES, CHIP 47 (1005)
R3350	1-220-882-81	s	RES, CHIP 33 (1005)
R3351	1-220-882-81	s	RES, CHIP 33 (1005)
R3352	1-220-882-81	s	RES, CHIP 33 (1005)
R3353	1-220-882-81	s	RES, CHIP 33 (1005)
R3354	1-220-882-81	s	RES, CHIP 33 (1005)
R3355	1-220-882-81	s	RES, CHIP 33 (1005)
R3356	1-220-882-81	s	RES, CHIP 33 (1005)
R3357	1-220-882-81	s	RES, CHIP 33 (1005)
R3358	1-208-855-81	s	RES, CHIP 47 (1005)
R3359	1-208-855-81	s	RES, CHIP 47 (1005)
R3360	1-208-855-81	s	RES, CHIP 47 (1005)
R3361	1-208-855-81	s	RES, CHIP 47 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R3362	1-208-855-81	s	RES, CHIP 47 (1005)
R3363	1-208-855-81	s	RES, CHIP 47 (1005)
R3364	1-208-855-81	s	RES, CHIP 47 (1005)
R3365	1-208-855-81	s	RES, CHIP 47 (1005)
R3366	1-208-863-81	s	RES, CHIP 100 (1005)
R3367	1-208-863-81	s	RES, CHIP 100 (1005)
R3368	1-208-863-81	s	RES, CHIP 100 (1005)
R3369	1-208-863-81	s	RES, CHIP 100 (1005)
R3370	1-218-977-81	s	RES, CHIP 100K
R3371	1-218-977-81	s	RES, CHIP 100K
R3372	1-218-977-81	s	RES, CHIP 100K
R3373	1-218-977-81	s	RES, CHIP 100K
R3500	1-208-875-81	s	RES, CHIP 330 (1005)
R3501	1-208-875-81	s	RES, CHIP 330 (1005)
R3502	1-208-875-81	s	RES, CHIP 330 (1005)
R3504	1-208-875-81	s	RES, CHIP 330 (1005)
R3505	1-208-875-81	s	RES, CHIP 330 (1005)
R3506	1-208-875-81	s	RES, CHIP 330 (1005)
R3507	1-208-875-81	s	RES, CHIP 330 (1005)
R3509	1-208-875-81	s	RES, CHIP 330 (1005)
R3510	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3511	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3512	1-208-894-81	s	RES, CHIP 2.0K (1005)
R3513	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R3514	1-208-855-81	s	RES, CHIP 47 (1005)
R3515	1-208-855-81	s	RES, CHIP 47 (1005)
R3518	1-208-855-81	s	RES, CHIP 47 (1005)
R3519	1-208-855-81	s	RES, CHIP 47 (1005)
R3520	1-208-855-81	s	RES, CHIP 47 (1005)
R3521	1-208-855-81	s	RES, CHIP 47 (1005)
R3523	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3524	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3526	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3527	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3528	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3529	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3530	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3531	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3533	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3534	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3535	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3536	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3540	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3541	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3542	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3543	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3544	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3545	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3546	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3547	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3548	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3549	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3550	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3551	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3552	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3553	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3554	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3555	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3556	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R3557	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3558	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3559	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3567	1-208-911-81	s	RES, CHIP 10K (1005)
R3568	1-208-911-81	s	RES, CHIP 10K (1005)
R3569	1-208-887-81	s	RES, CHIP 1.0K (1005)
R3570	1-208-911-81	s	RES, CHIP 10K (1005)
R3571	1-208-911-81	s	RES, CHIP 10K (1005)
R3572	1-208-911-81	s	RES, CHIP 10K (1005)
R3573	1-208-911-81	s	RES, CHIP 10K (1005)
R3575	1-208-911-81	s	RES, CHIP 10K (1005)
R3584	1-208-911-81	s	RES, CHIP 10K (1005)
R3585	1-208-911-81	s	RES, CHIP 10K (1005)
R3586	1-208-911-81	s	RES, CHIP 10K (1005)
R3587	1-208-911-81	s	RES, CHIP 10K (1005)
R3596	1-208-911-81	s	RES, CHIP 10K (1005)
R3597	1-208-911-81	s	RES, CHIP 10K (1005)
R3598	1-208-911-81	s	RES, CHIP 10K (1005)
R3599	1-208-911-81	s	RES, CHIP 10K (1005)
R3601	1-208-911-81	s	RES, CHIP 10K (1005)
R3602	1-208-911-81	s	RES, CHIP 10K (1005)
R3603	1-208-911-81	s	RES, CHIP 10K (1005)
R3604	1-208-911-81	s	RES, CHIP 10K (1005)
R3609	1-208-911-81	s	RES, CHIP 10K (1005)
R3610	1-208-911-81	s	RES, CHIP 10K (1005)
R3611	1-208-911-81	s	RES, CHIP 10K (1005)
R3615	1-208-911-81	s	RES, CHIP 10K (1005)
R3616	1-208-875-81	s	RES, CHIP 330 (1005)
R3617	1-208-875-81	s	RES, CHIP 330 (1005)
R3618	1-208-911-81	s	RES, CHIP 10K (1005)
R3619	1-208-911-81	s	RES, CHIP 10K (1005)
R3620	1-208-911-81	s	RES, CHIP 10K (1005)
R3621	1-208-911-81	s	RES, CHIP 10K (1005)
R3622	1-208-911-81	s	RES, CHIP 10K (1005)
R3623	1-208-911-81	s	RES, CHIP 10K (1005)
R3624	1-208-911-81	s	RES, CHIP 10K (1005)
R3625	1-208-911-81	s	RES, CHIP 10K (1005)
R3626	1-208-911-81	s	RES, CHIP 10K (1005)
R3627	1-208-911-81	s	RES, CHIP 10K (1005)
R3628	1-208-911-81	s	RES, CHIP 10K (1005)
R3629	1-208-911-81	s	RES, CHIP 10K (1005)
R3630	1-208-911-81	s	RES, CHIP 10K (1005)
R3631	1-208-911-81	s	RES, CHIP 10K (1005)
R3632	1-208-911-81	s	RES, CHIP 10K (1005)
R3633	1-208-911-81	s	RES, CHIP 10K (1005)
R3634	1-208-911-81	s	RES, CHIP 10K (1005)
R3635	1-208-911-81	s	RES, CHIP 10K (1005)
R3636	1-208-911-81	s	RES, CHIP 10K (1005)
R3637	1-208-911-81	s	RES, CHIP 10K (1005)
R3638	1-208-911-81	s	RES, CHIP 10K (1005)
R3639	1-208-911-81	s	RES, CHIP 10K (1005)
R3640	1-208-911-81	s	RES, CHIP 10K (1005)
R3641	1-208-911-81	s	RES, CHIP 10K (1005)
R3642	1-208-911-81	s	RES, CHIP 10K (1005)
R3643	1-208-911-81	s	RES, CHIP 10K (1005)
R4026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4029	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R4030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4037	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4038	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4039	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4040	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4041	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4042	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4043	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4059	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4061	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4063	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4064	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4065	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4073	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4250	1-220-878-81	s	RES, CHIP 22 (1005)
R4251	1-220-878-81	s	RES, CHIP 22 (1005)
R4252	1-220-878-81	s	RES, CHIP 22 (1005)
R4253	1-220-878-81	s	RES, CHIP 22 (1005)
R4254	1-220-878-81	s	RES, CHIP 22 (1005)
R4255	1-220-878-81	s	RES, CHIP 22 (1005)
R4256	1-220-878-81	s	RES, CHIP 22 (1005)
R4257	1-220-878-81	s	RES, CHIP 22 (1005)
R4258	1-220-878-81	s	RES, CHIP 22 (1005)
R4259	1-220-878-81	s	RES, CHIP 22 (1005)
R4260	1-220-878-81	s	RES, CHIP 22 (1005)
R4261	1-220-878-81	s	RES, CHIP 22 (1005)
R4262	1-220-878-81	s	RES, CHIP 22 (1005)
R4263	1-220-878-81	s	RES, CHIP 22 (1005)
R4264	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R4265	1-220-878-81	s	RES, CHIP 22 (1005)
R4266	1-220-878-81	s	RES, CHIP 22 (1005)
R4267	1-220-878-81	s	RES, CHIP 22 (1005)
R4268	1-220-878-81	s	RES, CHIP 22 (1005)
R4269	1-220-878-81	s	RES, CHIP 22 (1005)
R4270	1-220-878-81	s	RES, CHIP 22 (1005)
R4271	1-220-878-81	s	RES, CHIP 22 (1005)
R4272	1-220-878-81	s	RES, CHIP 22 (1005)
R4273	1-220-878-81	s	RES, CHIP 22 (1005)
R4274	1-220-878-81	s	RES, CHIP 22 (1005)
R4275	1-220-878-81	s	RES, CHIP 22 (1005)
R4276	1-220-878-81	s	RES, CHIP 22 (1005)
R4277	1-220-878-81	s	RES, CHIP 22 (1005)
R4278	1-220-878-81	s	RES, CHIP 22 (1005)
R4279	1-220-878-81	s	RES, CHIP 22 (1005)
R4280	1-220-878-81	s	RES, CHIP 22 (1005)
R4281	1-220-878-81	s	RES, CHIP 22 (1005)
R4282	1-220-878-81	s	RES, CHIP 22 (1005)
R4283	1-220-878-81	s	RES, CHIP 22 (1005)
R4284	1-220-878-81	s	RES, CHIP 22 (1005)
R4285	1-220-878-81	s	RES, CHIP 22 (1005)
R4286	1-220-878-81	s	RES, CHIP 22 (1005)
R4287	1-220-878-81	s	RES, CHIP 22 (1005)
R4288	1-220-878-81	s	RES, CHIP 22 (1005)
R4289	1-220-878-81	s	RES, CHIP 22 (1005)
R4290	1-220-878-81	s	RES, CHIP 22 (1005)
R4291	1-220-878-81	s	RES, CHIP 22 (1005)
R4292	1-220-878-81	s	RES, CHIP 22 (1005)
R4293	1-220-878-81	s	RES, CHIP 22 (1005)
R4294	1-220-878-81	s	RES, CHIP 22 (1005)
R4295	1-220-878-81	s	RES, CHIP 22 (1005)
R4296	1-220-878-81	s	RES, CHIP 22 (1005)
R4297	1-220-878-81	s	RES, CHIP 22 (1005)
R4298	1-220-878-81	s	RES, CHIP 22 (1005)
R4299	1-220-878-81	s	RES, CHIP 22 (1005)
R4300	1-220-878-81	s	RES, CHIP 22 (1005)
R4301	1-220-878-81	s	RES, CHIP 22 (1005)
R4302	1-220-878-81	s	RES, CHIP 22 (1005)
R4303	1-220-878-81	s	RES, CHIP 22 (1005)
R4304	1-220-878-81	s	RES, CHIP 22 (1005)
R4305	1-220-878-81	s	RES, CHIP 22 (1005)
R4306	1-220-878-81	s	RES, CHIP 22 (1005)
R4307	1-220-878-81	s	RES, CHIP 22 (1005)
R4308	1-220-878-81	s	RES, CHIP 22 (1005)
R4309	1-220-878-81	s	RES, CHIP 22 (1005)
R4310	1-220-878-81	s	RES, CHIP 22 (1005)
R4311	1-220-878-81	s	RES, CHIP 22 (1005)
R4312	1-220-878-81	s	RES, CHIP 22 (1005)
R4313	1-220-878-81	s	RES, CHIP 22 (1005)
R4314	1-220-878-81	s	RES, CHIP 22 (1005)
R4315	1-220-878-81	s	RES, CHIP 22 (1005)
R4316	1-220-878-81	s	RES, CHIP 22 (1005)
R4317	1-220-878-81	s	RES, CHIP 22 (1005)
R4318	1-220-878-81	s	RES, CHIP 22 (1005)
R4319	1-220-878-81	s	RES, CHIP 22 (1005)
R4320	1-220-878-81	s	RES, CHIP 22 (1005)
R4321	1-220-878-81	s	RES, CHIP 22 (1005)
R4322	1-220-878-81	s	RES, CHIP 22 (1005)
R4323	1-220-878-81	s	RES, CHIP 22 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R4324	1-220-878-81	s	RES, CHIP 22 (1005)
R4325	1-220-878-81	s	RES, CHIP 22 (1005)
R4326	1-220-878-81	s	RES, CHIP 22 (1005)
R4327	1-220-878-81	s	RES, CHIP 22 (1005)
R4328	1-220-878-81	s	RES, CHIP 22 (1005)
R4329	1-220-878-81	s	RES, CHIP 22 (1005)
R4330	1-220-878-81	s	RES, CHIP 22 (1005)
R4331	1-220-878-81	s	RES, CHIP 22 (1005)
R4332	1-220-878-81	s	RES, CHIP 22 (1005)
R4333	1-220-878-81	s	RES, CHIP 22 (1005)
R4334	1-220-878-81	s	RES, CHIP 22 (1005)
R4335	1-220-878-81	s	RES, CHIP 22 (1005)
R4336	1-220-878-81	s	RES, CHIP 22 (1005)
R4337	1-220-878-81	s	RES, CHIP 22 (1005)
R4338	1-220-878-81	s	RES, CHIP 22 (1005)
R4339	1-220-878-81	s	RES, CHIP 22 (1005)
R4340	1-220-878-81	s	RES, CHIP 22 (1005)
R4341	1-220-878-81	s	RES, CHIP 22 (1005)
R4342	1-220-878-81	s	RES, CHIP 22 (1005)
R4343	1-220-878-81	s	RES, CHIP 22 (1005)
R4344	1-220-878-81	s	RES, CHIP 22 (1005)
R4345	1-220-878-81	s	RES, CHIP 22 (1005)
R4346	1-220-878-81	s	RES, CHIP 22 (1005)
R4347	1-220-878-81	s	RES, CHIP 22 (1005)
R4348	1-220-878-81	s	RES, CHIP 22 (1005)
R4349	1-220-878-81	s	RES, CHIP 22 (1005)
R4350	1-220-878-81	s	RES, CHIP 22 (1005)
R4351	1-220-878-81	s	RES, CHIP 22 (1005)
R4352	1-220-878-81	s	RES, CHIP 22 (1005)
R4353	1-220-878-81	s	RES, CHIP 22 (1005)
R4354	1-220-878-81	s	RES, CHIP 22 (1005)
R4355	1-220-878-81	s	RES, CHIP 22 (1005)
R4356	1-220-878-81	s	RES, CHIP 22 (1005)
R4357	1-220-878-81	s	RES, CHIP 22 (1005)
R4358	1-220-878-81	s	RES, CHIP 22 (1005)
R4359	1-220-878-81	s	RES, CHIP 22 (1005)
R4360	1-220-878-81	s	RES, CHIP 22 (1005)
R4361	1-220-878-81	s	RES, CHIP 22 (1005)
R4362	1-220-878-81	s	RES, CHIP 22 (1005)
R4363	1-220-878-81	s	RES, CHIP 22 (1005)
R4364	1-220-878-81	s	RES, CHIP 22 (1005)
R4365	1-220-878-81	s	RES, CHIP 22 (1005)
R4366	1-208-857-81	s	RES, CHIP 56 (1005)
R4367	1-208-857-81	s	RES, CHIP 56 (1005)
R4368	1-208-857-81	s	RES, CHIP 56 (1005)
R4369	1-208-857-81	s	RES, CHIP 56 (1005)
R4370	1-208-857-81	s	RES, CHIP 56 (1005)
R4371	1-208-857-81	s	RES, CHIP 56 (1005)
R4372	1-208-857-81	s	RES, CHIP 56 (1005)
R4373	1-208-857-81	s	RES, CHIP 56 (1005)
R4374	1-208-857-81	s	RES, CHIP 56 (1005)
R4375	1-208-857-81	s	RES, CHIP 56 (1005)
R4376	1-208-857-81	s	RES, CHIP 56 (1005)
R4377	1-208-857-81	s	RES, CHIP 56 (1005)
R4378	1-208-857-81	s	RES, CHIP 56 (1005)
R4379	1-208-857-81	s	RES, CHIP 56 (1005)
R4380	1-208-857-81	s	RES, CHIP 56 (1005)
R4381	1-208-857-81	s	RES, CHIP 56 (1005)
R4382	1-208-857-81	s	RES, CHIP 56 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R4383	1-208-857-81	s	RES, CHIP 56 (1005)
R4384	1-208-857-81	s	RES, CHIP 56 (1005)
R4385	1-208-857-81	s	RES, CHIP 56 (1005)
R4386	1-208-857-81	s	RES, CHIP 56 (1005)
R4387	1-208-857-81	s	RES, CHIP 56 (1005)
R4388	1-208-857-81	s	RES, CHIP 56 (1005)
R4389	1-208-857-81	s	RES, CHIP 56 (1005)
R4390	1-208-857-81	s	RES, CHIP 56 (1005)
R4391	1-208-857-81	s	RES, CHIP 56 (1005)
R4392	1-208-857-81	s	RES, CHIP 56 (1005)
R4393	1-208-857-81	s	RES, CHIP 56 (1005)
R4394	1-208-857-81	s	RES, CHIP 56 (1005)
R4395	1-208-857-81	s	RES, CHIP 56 (1005)
R4396	1-208-857-81	s	RES, CHIP 56 (1005)
R4397	1-208-857-81	s	RES, CHIP 56 (1005)
R4398	1-208-857-81	s	RES, CHIP 56 (1005)
R4399	1-208-857-81	s	RES, CHIP 56 (1005)
R4400	1-208-857-81	s	RES, CHIP 56 (1005)
R4401	1-208-857-81	s	RES, CHIP 56 (1005)
R4402	1-208-857-81	s	RES, CHIP 56 (1005)
R4403	1-208-857-81	s	RES, CHIP 56 (1005)
R4404	1-208-857-81	s	RES, CHIP 56 (1005)
R4405	1-208-857-81	s	RES, CHIP 56 (1005)
R4406	1-208-857-81	s	RES, CHIP 56 (1005)
R4407	1-208-857-81	s	RES, CHIP 56 (1005)
R4408	1-208-857-81	s	RES, CHIP 56 (1005)
R4409	1-208-857-81	s	RES, CHIP 56 (1005)
R4410	1-208-857-81	s	RES, CHIP 56 (1005)
R4411	1-208-857-81	s	RES, CHIP 56 (1005)
R4412	1-208-857-81	s	RES, CHIP 56 (1005)
R4413	1-208-857-81	s	RES, CHIP 56 (1005)
R4414	1-208-857-81	s	RES, CHIP 56 (1005)
R4415	1-208-857-81	s	RES, CHIP 56 (1005)
R4416	1-208-857-81	s	RES, CHIP 56 (1005)
R4417	1-208-857-81	s	RES, CHIP 56 (1005)
R4418	1-208-857-81	s	RES, CHIP 56 (1005)
R4419	1-208-857-81	s	RES, CHIP 56 (1005)
R4420	1-208-857-81	s	RES, CHIP 56 (1005)
R4421	1-208-857-81	s	RES, CHIP 56 (1005)
R4422	1-208-857-81	s	RES, CHIP 56 (1005)
R4423	1-208-857-81	s	RES, CHIP 56 (1005)
R4424	1-208-857-81	s	RES, CHIP 56 (1005)
R4425	1-208-857-81	s	RES, CHIP 56 (1005)
R4426	1-208-857-81	s	RES, CHIP 56 (1005)
R4427	1-208-857-81	s	RES, CHIP 56 (1005)
R4428	1-208-857-81	s	RES, CHIP 56 (1005)
R4429	1-208-857-81	s	RES, CHIP 56 (1005)
R4430	1-208-857-81	s	RES, CHIP 56 (1005)
R4431	1-208-857-81	s	RES, CHIP 56 (1005)
R4432	1-208-857-81	s	RES, CHIP 56 (1005)
R4433	1-208-857-81	s	RES, CHIP 56 (1005)
R4434	1-208-857-81	s	RES, CHIP 56 (1005)
R4435	1-208-857-81	s	RES, CHIP 56 (1005)
R4436	1-208-857-81	s	RES, CHIP 56 (1005)
R4437	1-208-857-81	s	RES, CHIP 56 (1005)
R4438	1-208-857-81	s	RES, CHIP 56 (1005)
R4439	1-208-857-81	s	RES, CHIP 56 (1005)
R4440	1-208-857-81	s	RES, CHIP 56 (1005)
R4441	1-208-857-81	s	RES, CHIP 56 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R4442	1-208-857-81	s	RES, CHIP 56 (1005)
R4443	1-208-857-81	s	RES, CHIP 56 (1005)
R4444	1-208-857-81	s	RES, CHIP 56 (1005)
R4445	1-208-857-81	s	RES, CHIP 56 (1005)
R4446	1-208-857-81	s	RES, CHIP 56 (1005)
R4447	1-208-857-81	s	RES, CHIP 56 (1005)
R4448	1-208-857-81	s	RES, CHIP 56 (1005)
R4449	1-208-857-81	s	RES, CHIP 56 (1005)
R4450	1-208-857-81	s	RES, CHIP 56 (1005)
R4451	1-208-857-81	s	RES, CHIP 56 (1005)
R4452	1-208-857-81	s	RES, CHIP 56 (1005)
R4453	1-208-857-81	s	RES, CHIP 56 (1005)
R4454	1-208-857-81	s	RES, CHIP 56 (1005)
R4455	1-208-857-81	s	RES, CHIP 56 (1005)
R4456	1-208-857-81	s	RES, CHIP 56 (1005)
R4457	1-208-857-81	s	RES, CHIP 56 (1005)
R4458	1-208-857-81	s	RES, CHIP 56 (1005)
R4459	1-208-857-81	s	RES, CHIP 56 (1005)
R4460	1-208-857-81	s	RES, CHIP 56 (1005)
R4461	1-208-857-81	s	RES, CHIP 56 (1005)
R4462	1-208-857-81	s	RES, CHIP 56 (1005)
R4463	1-208-857-81	s	RES, CHIP 56 (1005)
R4464	1-208-857-81	s	RES, CHIP 56 (1005)
R4465	1-208-857-81	s	RES, CHIP 56 (1005)
R4466	1-208-857-81	s	RES, CHIP 56 (1005)
R4467	1-208-857-81	s	RES, CHIP 56 (1005)
R4468	1-208-857-81	s	RES, CHIP 56 (1005)
R4469	1-208-857-81	s	RES, CHIP 56 (1005)
R4470	1-208-857-81	s	RES, CHIP 56 (1005)
R4471	1-208-857-81	s	RES, CHIP 56 (1005)
R4472	1-208-857-81	s	RES, CHIP 56 (1005)
R4473	1-208-857-81	s	RES, CHIP 56 (1005)
R4474	1-208-857-81	s	RES, CHIP 56 (1005)
R4475	1-208-857-81	s	RES, CHIP 56 (1005)
R4476	1-208-857-81	s	RES, CHIP 56 (1005)
R4477	1-208-857-81	s	RES, CHIP 56 (1005)
R4478	1-208-857-81	s	RES, CHIP 56 (1005)
R4479	1-208-857-81	s	RES, CHIP 56 (1005)
R4480	1-208-857-81	s	RES, CHIP 56 (1005)
R4481	1-208-857-81	s	RES, CHIP 56 (1005)
R4482	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4483	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4500	1-208-863-81	s	RES, CHIP 100 (1005)
R4501	1-208-863-81	s	RES, CHIP 100 (1005)
R4502	1-208-863-81	s	RES, CHIP 100 (1005)
R4503	1-208-869-81	s	RES, CHIP 180 (1005)
R4504	1-208-869-81	s	RES, CHIP 180 (1005)
R4505	1-208-869-81	s	RES, CHIP 180 (1005)
R4750	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4751	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R4758	1-208-855-81	s	RES, CHIP 47 (1005)
R4759	1-208-855-81	s	RES, CHIP 47 (1005)
R4760	1-208-855-81	s	RES, CHIP 47 (1005)
R4761	1-208-855-81	s	RES, CHIP 47 (1005)
R4764	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4765	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4766	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4767	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4768	1-208-887-81	s	RES, CHIP 1.0K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R4769	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4770	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4771	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4772	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4773	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4774	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4775	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4776	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4777	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4778	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4779	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4780	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4781	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4782	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4783	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4784	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4785	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4786	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4787	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4788	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4789	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4790	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4791	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4792	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4793	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4794	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4795	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4796	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4797	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4798	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4799	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4800	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4801	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4802	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4803	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4804	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4805	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4806	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4807	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4808	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4809	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4810	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4811	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4812	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4813	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4821	1-208-911-81	s	RES, CHIP 10K (1005)
R4822	1-208-911-81	s	RES, CHIP 10K (1005)
R4823	1-208-887-81	s	RES, CHIP 1.0K (1005)
R4824	1-208-911-81	s	RES, CHIP 10K (1005)
R4825	1-208-911-81	s	RES, CHIP 10K (1005)
R4826	1-208-911-81	s	RES, CHIP 10K (1005)
R4827	1-208-911-81	s	RES, CHIP 10K (1005)
R4829	1-208-911-81	s	RES, CHIP 10K (1005)
R5000	1-208-911-81	s	RES, CHIP 10K (1005)
R5001	1-208-911-81	s	RES, CHIP 10K (1005)
R5002	1-208-911-81	s	RES, CHIP 10K (1005)
R5003	1-208-911-81	s	RES, CHIP 10K (1005)
R5004	1-208-911-81	s	RES, CHIP 10K (1005)
R5005	1-208-911-81	s	RES, CHIP 10K (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R5006	1-208-911-81	s	RES, CHIP 10K (1005)
R5008	1-208-911-81	s	RES, CHIP 10K (1005)
R5009	1-220-870-81	s	RES, CHIP 10 (1005)
R5010	1-220-870-81	s	RES, CHIP 10 (1005)
R5011	1-220-870-81	s	RES, CHIP 10 (1005)
R5012	1-220-870-81	s	RES, CHIP 10 (1005)
R5013	1-220-870-81	s	RES, CHIP 10 (1005)
R5014	1-220-870-81	s	RES, CHIP 10 (1005)
R5015	1-220-870-81	s	RES, CHIP 10 (1005)
R5016	1-208-871-81	s	RES, CHIP 220 (1005)
R5017	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5018	1-208-871-81	s	RES, CHIP 220 (1005)
R5019	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5021	1-208-911-81	s	RES, CHIP 10K (1005)
R5022	1-208-911-81	s	RES, CHIP 10K (1005)
R5023	1-208-911-81	s	RES, CHIP 10K (1005)
R5025	1-208-911-81	s	RES, CHIP 10K (1005)
R5026	1-208-911-81	s	RES, CHIP 10K (1005)
R5027	1-208-911-81	s	RES, CHIP 10K (1005)
R5029	1-208-911-81	s	RES, CHIP 10K (1005)
R5030	1-208-911-81	s	RES, CHIP 10K (1005)
R5031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5050	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5051	1-208-911-81	s	RES, CHIP 10K (1005)
R5052	1-208-911-81	s	RES, CHIP 10K (1005)
R5053	1-208-887-81	s	RES, CHIP 1.0K (1005)
R5054	1-208-911-81	s	RES, CHIP 10K (1005)
R5055	1-208-911-81	s	RES, CHIP 10K (1005)
R5056	1-208-863-81	s	RES, CHIP 100 (1005)
R5057	1-208-863-81	s	RES, CHIP 100 (1005)
R5058	1-208-863-81	s	RES, CHIP 100 (1005)
R5059	1-208-869-81	s	RES, CHIP 180 (1005)
R5060	1-208-869-81	s	RES, CHIP 180 (1005)
R5061	1-208-869-81	s	RES, CHIP 180 (1005)
R6000	1-218-895-91	s	RES, CHIP 100K (1608)
R6001	1-218-895-91	s	RES, CHIP 100K (1608)
R6002	1-218-895-91	s	RES, CHIP 100K (1608)
R6003	1-218-895-91	s	RES, CHIP 100K (1608)
R6004	1-208-933-81	s	RES, CHIP 82K (1005)
R6005	1-208-928-81	s	RES, CHIP 51K (1005)
R6009	1-218-871-91	s	RES, CHIP 10K (1608)
R6010	1-218-864-91	s	RES, CHIP 5.1K (1608)
R6011	1-218-857-91	s	RES, CHIP 2.7K (1608)
R6012	1-218-847-91	s	RES, CHIP 1.0K (1608)
R6013	1-218-854-91	s	RES, CHIP 2.0K (1608)
R6017	1-218-847-91	s	RES, CHIP 1.0K (1608)
R6018	1-218-854-91	s	RES, CHIP 2.0K (1608)
R6019	1-218-847-91	s	RES, CHIP 1.0K (1608)
R6020	1-218-854-91	s	RES, CHIP 2.0K (1608)
R6021	1-218-847-91	s	RES, CHIP 1.0K (1608)
R6022	1-218-854-91	s	RES, CHIP 2.0K (1608)
R6023	1-218-847-91	s	RES, CHIP 1.0K (1608)
R6024	1-218-854-91	s	RES, CHIP 2.0K (1608)
R6025	1-218-895-91	s	RES, CHIP 100K (1608)
R6026	1-208-928-81	s	RES, CHIP 51K (1005)
R6027	1-208-928-81	s	RES, CHIP 51K (1005)
R7000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7001	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7002	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R7003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7006	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7007	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7010	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7011	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7012	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7013	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7014	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7015	1-220-870-81	s	RES, CHIP 10 (1005)
R7016	1-220-870-81	s	RES, CHIP 10 (1005)
R7017	1-220-870-81	s	RES, CHIP 10 (1005)
R7018	1-220-870-81	s	RES, CHIP 10 (1005)
R7019	1-220-870-81	s	RES, CHIP 10 (1005)
R7020	1-220-870-81	s	RES, CHIP 10 (1005)
R7021	1-220-870-81	s	RES, CHIP 10 (1005)
R7022	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7024	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7025	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7026	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7027	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7028	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7029	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7030	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7031	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7032	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7033	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7034	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7035	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7036	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7037	1-220-870-81	s	RES, CHIP 10 (1005)
R7038	1-220-870-81	s	RES, CHIP 10 (1005)
R7039	1-220-870-81	s	RES, CHIP 10 (1005)
R7040	1-220-870-81	s	RES, CHIP 10 (1005)
R7041	1-220-870-81	s	RES, CHIP 10 (1005)
R7042	1-220-870-81	s	RES, CHIP 10 (1005)
R7043	1-220-870-81	s	RES, CHIP 10 (1005)
R7044	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7045	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7046	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7047	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7048	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7049	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7050	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7051	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7052	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7053	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7054	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7055	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7056	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7057	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7058	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7059	1-220-870-81	s	RES, CHIP 10 (1005)
R7060	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7061	1-220-870-81	s	RES, CHIP 10 (1005)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
R7062	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7063	1-220-870-81	s	RES, CHIP 10 (1005)
R7064	1-220-870-81	s	RES, CHIP 10 (1005)
R7065	1-220-870-81	s	RES, CHIP 10 (1005)
R7066	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7067	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7068	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7069	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7070	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7071	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7072	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7073	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7074	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7075	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7076	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7077	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7078	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7079	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7080	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7081	1-220-870-81	s	RES, CHIP 10 (1005)
R7082	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7083	1-220-870-81	s	RES, CHIP 10 (1005)
R7084	1-220-870-81	s	RES, CHIP 10 (1005)
R7100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7101	1-208-871-81	s	RES, CHIP 220 (1005)
R7102	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R7104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB100	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB101	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB102	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB103	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB104	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB105	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB106	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB107	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB108	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB109	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB110	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB111	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB112	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB113	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB114	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB400	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB401	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB402	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB403	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB404	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB405	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB406	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB407	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB618	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB619	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB620	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB621	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB622	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB623	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
RB624	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB625	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB626	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB627	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB628	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB629	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB630	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB631	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB632	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB633	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB634	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB635	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB636	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB637	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB638	1-234-381-21	s	RES, NETWORK 100K (1005X4)
RB900	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB901	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB902	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB903	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB904	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB905	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB906	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB907	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB908	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB909	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB910	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB911	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB912	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB913	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB914	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB916	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB917	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB918	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB919	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB920	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB921	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB922	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB924	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1401	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1402	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1403	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1404	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1405	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1406	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1407	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1408	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1409	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1412	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1413	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1414	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB1415	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1416	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1417	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1418	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1419	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2008	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(MY-115 BOARD (HKSR-5804))

Ref. No. or Q'ty	Part No.	SP	Description
RB2009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2014	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2015	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2016	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2017	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB2018	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB2019	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB3001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4500	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB4501	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB5000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB5001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
S900	1-692-270-41	s	SWITCH, SLIDE
S1000	1-771-721-21	s	SWITCH, TACTILE
S1001	1-771-721-21	s	SWITCH, TACTILE
S1400	1-692-271-41	s	SWITCH, SLIDE
S1401	1-692-271-41	s	SWITCH, SLIDE
S1402	1-692-271-41	s	SWITCH, SLIDE
S1403	1-692-271-41	s	SWITCH, SLIDE
S1404	1-692-271-41	s	SWITCH, SLIDE
S3000	1-692-270-41	s	SWITCH, SLIDE
S3001	1-692-270-41	s	SWITCH, SLIDE
S4500	1-692-270-41	s	SWITCH, SLIDE
S4501	1-692-270-41	s	SWITCH, SLIDE
S5000	1-692-270-41	s	SWITCH, SLIDE
TP700	1-535-877-22	s	CHIP, CHECKER
TP1400	1-535-877-22	s	CHIP, CHECKER
TP1401	1-535-877-22	s	CHIP, CHECKER
TP1402	1-535-877-22	s	CHIP, CHECKER
TP1403	1-535-877-22	s	CHIP, CHECKER
TP1404	1-535-877-22	s	CHIP, CHECKER
TP1405	1-535-877-22	s	CHIP, CHECKER
TP1406	1-535-877-22	s	CHIP, CHECKER
TP1407	1-535-877-22	s	CHIP, CHECKER
TP2000	1-535-877-22	s	CHIP, CHECKER
TP2001	1-535-877-22	s	CHIP, CHECKER
TP2002	1-535-877-22	s	CHIP, CHECKER
TP2003	1-535-877-22	s	CHIP, CHECKER
TP3000	1-535-877-22	s	CHIP, CHECKER
TP3001	1-535-877-22	s	CHIP, CHECKER
TP3002	1-535-877-22	s	CHIP, CHECKER
TP4500	1-535-877-22	s	CHIP, CHECKER
TP4501	1-535-877-22	s	CHIP, CHECKER
TP4502	1-535-877-22	s	CHIP, CHECKER
TP5000	1-535-877-22	s	CHIP, CHECKER
TP5001	1-535-877-22	s	CHIP, CHECKER
TP5002	1-535-877-22	s	CHIP, CHECKER
X700	1-813-052-21	s	VIBRATOR, CRYSTAL (25 MHz)
X1400	1-813-824-11	s	OSCILLATOR, CRYSTAL
X2500	1-813-530-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3
X2501	1-813-529-11	s	OSCILLATOR, CRYSTAL (VCXO) 3.3
X2503	1-814-184-11	s	OSCILLATOR, CRYSTAL
X2504	1-814-185-11	s	OSCILLATOR, CRYSTAL

PC-70 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8315-619-D	s	MOUNTED CIRCUIT BOARD, PC-70

The mounted components on the suffix 32 PC-70 board are listed below.

1pc	A-8315-619-D	s	MOUNTED CIRCUIT BOARD, PC-70 MOUNTED PC
1pc	3-176-598-02	o	SPRING, GROUND
CN934	1-565-038-51	s	CONNECTOR, FFC/FPC (ZIF) AN 5P
PH1	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
PH2	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
PH3	8-719-939-05	s	PHOTO INTERRUPTER GP1S54J0000F
R1	1-218-853-91	s	RES, CHIP 1.8K (1608)
R2	1-218-853-91	s	RES, CHIP 1.8K (1608)
R3	1-218-853-91	s	RES, CHIP 1.8K (1608)
R4	1-218-853-91	s	RES, CHIP 1.8K (1608)
R5	1-218-853-91	s	RES, CHIP 1.8K (1608)
R6	1-218-853-91	s	RES, CHIP 1.8K (1608)
R7	1-218-853-91	s	RES, CHIP 1.8K (1608)
R8	1-218-853-91	s	RES, CHIP 1.8K (1608)
R9	1-218-853-91	s	RES, CHIP 1.8K (1608)

PTC-99 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

This board is out of spare parts.
When replacement is required, replace it with the assembly (including mounted circuit board) below.

A-8279-282-A s SENSOR ASSY,MC

PTC-101 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

This board is out of spare parts.
When replacement is required, replace it with the assembly (including mounted circuit board) below.

A-8325-080-D s DIAL ASSY

PTC-102 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

This board is out of spare parts.
When replacement is required, replace it with the assembly (including mounted circuit board) below.

A-8325-414-D s BOX ASSY, GEAR (RP)

SE-606A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8328-379-C	s	MOUNTED CIRCUIT BOARD, SE-606A
C1	1-109-864-91	s	CAP, CHIP CERAMIC 68PF CH
C2	1-109-864-91	s	CAP, CHIP CERAMIC 68PF CH
C3	1-164-377-91	s	CAP, CERAMIC 13PF CH 1608
C4	1-164-377-91	s	CAP, CERAMIC 13PF CH 1608
CN1	1-774-792-51	s	CONNECTOR, FPC 4P

SS-102 BOARD

*a: For suffix 11
*b: For suffix 12, 13

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1317-738-A	s	MOUNTED CIRCUIT BOARD, BOARD, SS-102
1pc	⚠ 1-767-156-11	s	OSCILLATOR, CRYSTAL (BATTERY)
1pc	3-179-084-11	s	LEVER (R), PC BOARD
1pc	3-179-085-11	s	LEVER (L), PC BOARD
6pcs	7-621-759-45	s	+PSW, 2.6X6
C100	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C101	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C102	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C103	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C104	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C105	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C111	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C112	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C123	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C130	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C131	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C133	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C134	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C135	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C136	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C138	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C149	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C238	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C308	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C311	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C314	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C320	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C400	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C401	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C409	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C410	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C411	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C412	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C415	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C416	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C419	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C420	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C421	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C426	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C428	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C430	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C507	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C520	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C523	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C524	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C529	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C615	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-165-872-21	s	CAP, ELECT 47MF (5.0X6.5)
C622	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C623	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C624	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C625	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C626	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C627	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C628	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C630	1-164-858-81	s	CAP, CHIP CERAMIC 22PF CH 1005
C631	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C632	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C636	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C637	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C638	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C639	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C640	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C641	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C646	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C647	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C648	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C704	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C705	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C706	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C707	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C708	1-165-870-21	s	CAP, ELECT 100MF (6.3X6)
C709	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C710	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C711	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C712	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C714	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C715	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C716	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C717	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C718	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C719	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C720	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C721	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C723	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C725	1-131-661-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C737	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C738	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C739	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C740	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C741	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C742	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C743	1-112-299-91	s	CAP, CERAMIC 2.2MF B (2012)
C744	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C745	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C746	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C818	1-128-936-22	s	CAP, ELECT (NONPOLAR) 22MF
C819	1-128-936-22	s	CAP, ELECT (NONPOLAR) 22MF
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C822	1-128-451-21	s	CAP, CHIP ELECT 22MF
C823	1-127-971-21	s	CAP, CHIP FILM 0.01MF (3216)
C824	1-135-822-21	s	CAP, CHIP FILM 0.0022MF
C826	1-127-971-21	s	CAP, CHIP FILM 0.01MF (3216)
C827	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C828	1-128-451-21	s	CAP, CHIP ELECT 22MF
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C833	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C834	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-128-936-22	s	CAP, ELECT (NONPOLAR) 22MF
C837	1-128-936-22	s	CAP, ELECT (NONPOLAR) 22MF
C838	1-128-936-22	s	CAP, ELECT (NONPOLAR) 22MF
C839	1-128-936-22	s	CAP, ELECT (NONPOLAR) 22MF
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C922	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C930	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C931	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C932	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C934	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C935	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C936	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C940	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1014	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1015	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1016	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1017	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1018	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1019	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1020	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1021	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1022	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1023	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1024	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1025	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1026	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1027	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1028	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1029	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1030	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1031	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1032	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1033	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1034	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1035	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1036	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1037	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1038	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1100	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1101	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1102	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1103	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1104	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1105	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1106	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1107	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1113	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1114	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1115	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1118	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1119	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1120	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1121	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1122	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1123	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1124	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1126	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1127	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1128	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1129	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1131	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1132	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1133	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1134	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1135	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1136	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1137	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1138	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1141	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1143	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1144	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1145	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1146	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1147	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1148	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1200	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1201	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1202	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1203	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1204	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1205	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1206	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1207	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C1208	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C1209	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1211	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1212	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1213	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1214	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1215	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1216	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1218	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1219	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1220	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1221	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1222	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1223	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1224	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1225	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1226	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1227	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1229	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1230	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1231	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1232	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1233	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1236	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1237	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1238	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1239	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1240	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1241	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1242	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1243	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1244	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C1245	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1246	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1247	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1248	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1249	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1300	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1301	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1302	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1303	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1304	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1305	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1306	1-164-939-81	s	CAP, CHIPCERAMIC 2200PF B 1005
C1307	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1308	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1309	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1310	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1311	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C1314	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1315	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1316	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1317	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1318	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1319	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1320	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1321	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1322	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1323	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1324	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1325	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1326	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1327	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1328	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1329	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1330	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1331	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1332	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1333	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1334	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1335	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1336	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1337	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1338	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1339	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1340	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1341	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1342	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1343	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1344	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1345	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1346	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1347	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C1348	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1349	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1350	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1351	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1352	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1353	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1354	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1355	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1356	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1357	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1358	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1359	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1360	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1361	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1362	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1363	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1365	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1366	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1367	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1368	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1369	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1370	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1371	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C1372	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C1373	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C1374	1-164-880-81	s	CAP,CHIP CERAMIC 180PF CH 1005
C1375	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1376	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1377	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1378	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C1379	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1380	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1500	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1501	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1502	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1503	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1504	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1505	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1509	1-119-923-81	s	CAP, CERAMIC 0.047MF B 1005
C1510	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1511	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1512	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C1513	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C1514	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1515	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1516	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1517	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1518	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1519	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1522	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1523	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1529	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1530	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1531	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1532	1-100-436-91	s	CAP, CERAMIC 33000PF B (1608)
C1533	1-100-436-91	s	CAP, CERAMIC 33000PF B (1608)
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1536	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C1537	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1538	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1539	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1540	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1541	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1542	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1543	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1544	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1546	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1547	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1548	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1549	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1550	1-126-396-21	s	CAP, CHIP ELECT 47MF (6.3X5.7)
C1600	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1601	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1602	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1603	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1607	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1608	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1611	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1612	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1615	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1616	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1617	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1618	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1619	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1620	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1621	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1622	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1623	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1624	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1625	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1626	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1627	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1628	1-112-692-11	s	CAP,CHIP CERAMIC1000PF CH 1005
C1629	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1630	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1631	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1632	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1633	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1634	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1635	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1636	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1637	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1638	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1639	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1640	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1641	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1642	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1643	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1644	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1645	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1646	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608
C1647	1-127-715-91	s	CAP,CHIP CERAMIC 0.22MF B 1608

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1648	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1649	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
CN100	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN101	1-764-095-21	o	PIN, CONNECTOR (PC BOARD) 10P
CN300	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN500	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
CN600	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN601	1-764-095-21	o	PIN, CONNECTOR (PC BOARD) 10P
CN1000	1-774-391-21	o	CONNECTOR, BOARD TO BOARD 60P
CN1001	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
D500	8-719-063-83	s	DIODE SML-510MWT86
D501	8-719-063-83	s	DIODE SML-510MWT86
D502	8-719-077-09	s	DIODE CL-196HR-CD-T
D600	8-719-063-83	s	DIODE SML-510MWT86
D601	8-719-077-09	s	DIODE CL-196HR-CD-T
D800	8-719-820-42	s	DIODE 1SS302-TE85L
D801	8-719-820-42	s	DIODE 1SS302-TE85L
D1000	8-719-820-42	s	DIODE 1SS302-TE85L
D1100	8-719-820-42	s	DIODE 1SS302-TE85L
D1101	8-719-820-42	s	DIODE 1SS302-TE85L
D1102	8-719-820-42	s	DIODE 1SS302-TE85L
D1103	8-719-820-42	s	DIODE 1SS302-TE85L
D1104	8-719-820-42	s	DIODE 1SS302-TE85L
D1105	8-719-820-42	s	DIODE 1SS302-TE85L
D1106	8-719-820-42	s	DIODE 1SS302-TE85L
D1107	8-719-820-42	s	DIODE 1SS302-TE85L
D1108	8-719-820-42	s	DIODE 1SS302-TE85L
D1109	8-719-820-42	s	DIODE 1SS302-TE85L
D1110	8-719-820-42	s	DIODE 1SS302-TE85L
D1200	8-719-820-42	s	DIODE 1SS302-TE85L
D1202	8-719-820-42	s	DIODE 1SS302-TE85L
D1203	8-719-820-42	s	DIODE 1SS302-TE85L
D1204	8-719-820-42	s	DIODE 1SS302-TE85L
D1205	8-719-820-42	s	DIODE 1SS302-TE85L
D1206	8-719-820-42	s	DIODE 1SS302-TE85L
D1207	8-719-820-42	s	DIODE 1SS302-TE85L
D1208	8-719-820-42	s	DIODE 1SS302-TE85L
D1209	8-719-820-42	s	DIODE 1SS302-TE85L
D1210	8-719-820-42	s	DIODE 1SS302-TE85L
D1211	8-719-820-42	s	DIODE 1SS302-TE85L
D1212	8-719-820-42	s	DIODE 1SS302-TE85L
D1213	8-719-820-42	s	DIODE 1SS302-TE85L
D1214	8-719-820-42	s	DIODE 1SS302-TE85L
D1215	8-719-820-42	s	DIODE 1SS302-TE85L
D1216	8-719-820-42	s	DIODE 1SS302-TE85L
D1217	8-719-820-42	s	DIODE 1SS302-TE85L
D1218	8-719-820-42	s	DIODE 1SS302-TE85L
D1219	8-719-820-42	s	DIODE 1SS302-TE85L
D1220	8-719-820-42	s	DIODE 1SS302-TE85L
D1221	8-719-820-42	s	DIODE 1SS302-TE85L
D1222	8-719-820-42	s	DIODE 1SS302-TE85L
D1223	8-719-820-42	s	DIODE 1SS302-TE85L
D1224	8-719-024-83	s	DIODE 1SS301-TE85L
D1225	8-719-063-83	s	DIODE SML-510MWT86
D1226	8-719-063-83	s	DIODE SML-510MWT86
D1227	8-719-077-09	s	DIODE CL-196HR-CD-T
D1228	8-719-024-83	s	DIODE 1SS301-TE85L
D1300	8-719-024-81	s	DIODE 1SS300-TE85L

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1500	8-719-820-42	s	DIODE 1SS302-TE85L
D1501	8-719-820-42	s	DIODE 1SS302-TE85L
E200	1-535-877-22	s	CHIP, CHECKER
E400	1-535-877-22	s	CHIP, CHECKER
E500	1-535-877-22	s	CHIP, CHECKER
E600	1-535-877-22	s	CHIP, CHECKER
E700	1-535-877-22	s	CHIP, CHECKER
E800	1-535-877-22	s	CHIP, CHECKER
E1000	1-535-877-22	s	CHIP, CHECKER
E1200	1-535-877-22	s	CHIP, CHECKER
E1201	1-535-877-22	s	CHIP, CHECKER
E1300	1-535-877-22	s	CHIP, CHECKER
E1301	1-535-877-22	s	CHIP, CHECKER
E1302	1-535-877-22	s	CHIP, CHECKER
E1500	1-535-877-22	s	CHIP, CHECKER
E1600	1-535-877-22	s	CHIP, CHECKER
F100	⚠ 1-533-627-21	s	FUSE (SMD) (5A/125V)
F101	⚠ 1-576-212-21	s	FUSE (SMD) (1.25A/125V)
F102	⚠ 1-576-212-21	s	FUSE (SMD) (1.25A/125V)
F103	⚠ 1-576-212-21	s	FUSE (SMD) (1.25A/125V)
FB100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB102	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB504	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB505	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB506	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB507	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB508	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB600	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB601	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB602	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB700	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB701	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB702	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB703	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB704	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB705	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB900	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC100	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC101	6-704-560-01	s	IC HD6417709SF133BV
IC103	6-703-742-01	s	IC S-80830CNUA-B8PT2G
IC104	6-704-156-01	s	IC S-80821CNUA-B8GT2G
IC105	8-759-679-53	s	IC SN74LVC244APWR
IC106	6-700-398-01	s	IC UPC2918T-E1
IC107	6-708-277-01	s	IC CDCVF25081PWR
IC108	8-759-669-44	s	IC SN74LVC74APWR-12
IC109	8-759-573-97	s	IC SN74LVC541APWR
IC200	6-707-897-01	s	IC K4S641632K-UC75
IC201	6-707-897-01	s	IC EDS6416AHTA-75-E
IC202	6-707-897-01	s	IC EDS6416AHTA-75-E
IC203	6-707-897-01	s	IC EDS6416AHTA-75-E
IC204	8-759-573-97	s	IC SN74LVC541APWR
IC205	8-759-573-97	s	IC SN74LVC541APWR

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC206	8-759-573-97	s	IC SN74LVC541APWR
IC207	8-759-573-97	s	IC SN74LVC541APWR
IC208	6-701-994-01	s	IC SN74LVCH245APWR
IC209	6-701-994-01	s	IC SN74LVCH245APWR
IC210	6-701-994-01	s	IC SN74LVCH245APWR
IC211	6-701-994-01	s	IC SN74LVCH245APWR
IC214	6-704-281-01	s	IC M48T35AV-10MH1F
IC215	6-706-482-01	s	IC TC7SH00FU(T5RSOYJF)
IC300	8-759-573-97	s	IC SN74LVC541APWR
IC302	8-759-392-77	s	IC SN74LVC245APWR
IC303	8-759-392-77	s	IC SN74LVC245APWR
IC304	8-759-392-77	s	IC SN74LVC245APWR
IC305	8-759-392-77	s	IC SN74LVC245APWR
IC306	8-759-392-77	s	IC SN74LVC245APWR
IC307	8-759-392-77	s	IC SN74LVC245APWR
IC308	8-759-392-77	s	IC SN74LVC245APWR
IC309	8-759-392-77	s	IC SN74LVC245APWR
IC311	8-759-683-80	s	IC SN65LVDS1DBVR
IC312	8-759-392-77	s	IC SN74LVC245APWR
IC401	8-759-092-27	s	IC DS3691MX
IC402	8-759-092-27	s	IC DS3691MX
IC403	8-759-675-47	s	IC SN74LVC04APWR
IC404	6-707-869-01	s	IC TC74VHC14FT(EKJ)
IC405	8-759-679-56	s	IC SN74LVC02APWR
IC406	8-759-679-57	s	IC SN74LVC00APWR
IC407	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC408	8-759-660-49	s	IC AM26LV32CNSR
IC409	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC410	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC413	8-759-679-55	s	IC SN74LVC08APWR
IC503	8-759-445-94	s	IC AK6480AM-E2
IC504	8-759-675-48	s	IC SN74LVC32APWR
IC505	8-759-679-53	s	IC SN74LVC244APWR
IC506	8-759-675-47	s	IC SN74LVC04APWR
IC507	8-759-679-55	s	IC SN74LVC08APWR
IC508	8-759-675-47	s	IC SN74LVC04APWR
IC509	8-759-679-53	s	IC SN74LVC244APWR
IC510	8-759-679-53	s	IC SN74LVC244APWR
IC511	8-759-573-97	s	IC SN74LVC541APWR
IC512	6-701-990-01	s	IC SN74LVC257APWR
IC600	6-704-560-01	s	IC HD6417709SF133BV
IC601	6-700-398-01	s	IC UPC2918T-E1
IC602	8-759-573-97	s	IC SN74LVC541APWR
IC603	6-707-897-01	s	IC EDS6416AHTA-75-E
IC604	6-707-897-01	s	IC EDS6416AHTA-75-E
IC605	8-759-669-44	s	IC SN74LVC74APWR-12
IC606	8-759-669-44	s	IC SN74LVC74APWR-12
IC608	6-700-419-01	s	IC CY7C024AV-25AXC
IC609	6-708-277-01	s	IC CDCVF25081PWR
IC610	8-759-573-97	s	IC SN74LVC541APWR
IC611	8-759-573-97	s	IC SN74LVC541APWR
IC612	8-759-573-97	s	IC SN74LVC541APWR
IC613	8-759-573-97	s	IC SN74LVC541APWR
IC614	6-701-994-01	s	IC SN74LVCH245APWR
IC615	6-701-994-01	s	IC SN74LVCH245APWR
IC618	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC702	8-759-679-53	s	IC SN74LVC244APWR
IC704	8-759-679-53	s	IC SN74LVC244APWR
IC750	6-701-572-01	s	IC TPS54610PWPR

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC805	8-759-338-95	s	IC NJM2903V(TE2)
IC806	8-759-157-42	s	IC TL082CPS-E20
IC807	8-759-356-17	s	IC NJM4556AM-A-TE2
IC901	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC902	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC903	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC904	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC905	6-707-875-01	s	IC TC74VHC245FT(EKJ)
IC906	6-708-277-01	s	IC CDCVF25081PWR
IC1001	8-759-669-43	s	IC SN74LVC157APWR-12
IC1002*b	6-707-621-01	o	IC S29AL016D70TFI020
IC1003	6-710-009-01	s	IC MD56V62320K-75TAZN3B
IC1005	8-759-679-53	s	IC SN74LVC244APWR
IC1006	8-759-679-53	s	IC SN74LVC244APWR
IC1008	8-759-675-48	s	IC SN74LVC32APWR
IC1009	8-759-679-53	s	IC SN74LVC244APWR
IC1010	8-759-524-08	s	IC TC74VHC139FT(EL)
IC1011	8-759-445-94	s	IC AK6480AM-E2
IC1012	8-759-445-94	s	IC AK6480AM-E2
IC1013	8-759-445-94	s	IC AK6480AM-E2
IC1014	8-759-445-94	s	IC AK6480AM-E2
IC1101	8-759-679-53	s	IC SN74LVC244APWR
IC1102	8-759-679-53	s	IC SN74LVC244APWR
IC1103	8-759-679-53	s	IC SN74LVC244APWR
IC1104	8-759-338-95	s	IC NJM2903V(TE2)
IC1105	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC1106	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC1107	8-759-338-95	s	IC NJM2903V(TE2)
IC1108	8-759-338-95	s	IC NJM2903V(TE2)
IC1109	8-759-675-48	s	IC SN74LVC32APWR
IC1110	8-759-679-55	s	IC SN74LVC08APWR
IC1111	8-759-679-53	s	IC SN74LVC244APWR
IC1112	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC1113	8-759-675-48	s	IC SN74LVC32APWR
IC1114	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC1115	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC1116	8-759-338-95	s	IC NJM2903V(TE2)
IC1117	8-759-338-95	s	IC NJM2903V(TE2)
IC1200	6-704-156-01	s	IC S-80821CNUA-B8GT2G
IC1201	8-759-278-58	s	IC NJM4558V-TE2
IC1202	8-759-278-58	s	IC NJM4558V-TE2
IC1203	8-759-157-42	s	IC TL082CPS-E20
IC1204	8-759-157-42	s	IC TL082CPS-E20
IC1205	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1206	8-759-278-58	s	IC NJM4558V-TE2
IC1207	8-759-278-58	s	IC NJM4558V-TE2
IC1208	8-759-278-58	s	IC NJM4558V-TE2
IC1209	8-759-278-58	s	IC NJM4558V-TE2
IC1210	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1300	8-759-442-54	s	IC RH5RL50AA-T1-FA
IC1301	8-759-685-34	s	IC M62352AGP-D60Q
IC1302	8-759-833-99	s	IC MC74HC4052ADTR2
IC1303	8-759-442-54	s	IC RH5RL50AA-T1-FA
IC1304	8-759-523-00	s	IC TC74HC4051AFT(EL)
IC1305	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1306	8-759-278-58	s	IC NJM4558V-TE2
IC1307	8-759-278-58	s	IC NJM4558V-TE2
IC1308	8-759-278-58	s	IC NJM4558V-TE2
IC1309	8-759-278-58	s	IC NJM4558V-TE2

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1310	8-759-278-58	s	IC NJM4558V-TE2
IC1311	8-759-278-58	s	IC NJM4558V-TE2
IC1312	8-759-278-58	s	IC NJM4558V-TE2
IC1313	8-759-278-58	s	IC NJM4558V-TE2
IC1314	8-759-278-58	s	IC NJM4558V-TE2
IC1315	8-759-338-95	s	IC NJM2903V(TE2)
IC1316	8-759-338-95	s	IC NJM2903V(TE2)
IC1317	8-759-338-95	s	IC NJM2903V(TE2)
IC1318	8-759-549-15	s	IC SN74LV245APWR
IC1319	8-759-337-40	s	IC NJM2904V(TE2)
IC1320	8-759-337-40	s	IC NJM2904V(TE2)
IC1321	8-759-679-53	s	IC SN74LVC244APWR
IC1322	8-759-338-95	s	IC NJM2903V(TE2)
IC1323	8-759-338-95	s	IC NJM2903V(TE2)
IC1500	8-759-442-54	s	IC RH5RL50AA-T1-FA
IC1502	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1503	8-759-422-21	s	IC NJM4580V(TE2)
IC1504	8-759-422-21	s	IC NJM4580V(TE2)
IC1505	8-759-422-21	s	IC NJM4580V(TE2)
IC1506	8-759-422-21	s	IC NJM4580V(TE2)
IC1507	8-759-422-21	s	IC NJM4580V(TE2)
IC1508	8-759-338-95	s	IC NJM2903V(TE2)
IC1509	8-759-422-21	s	IC NJM4580V(TE2)
IC1510	8-759-422-21	s	IC NJM4580V(TE2)
IC1511	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1512	8-759-422-21	s	IC NJM4580V(TE2)
IC1513	8-759-422-21	s	IC NJM4580V(TE2)
IC1600	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1601	6-707-893-01	s	IC TC74VHCT541AFT(EKJ)
IC1602	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1603	8-759-422-21	s	IC NJM4580V(TE2)
IC1604	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1605	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1606	8-759-422-21	s	IC NJM4580V(TE2)
IC1607	8-759-157-42	s	IC TL082CPS-E20
IC1608	8-759-422-21	s	IC NJM4580V(TE2)
IC1609	8-759-422-21	s	IC NJM4580V(TE2)
IC1610	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1611	8-759-422-21	s	IC NJM4580V(TE2)
IC1612	8-759-422-21	s	IC NJM4580V(TE2)
IC1613	8-759-157-42	s	IC TL082CPS-E20
IC1614	8-759-422-21	s	IC NJM4580V(TE2)
IC1615	8-759-422-21	s	IC NJM4580V(TE2)
L100	1-416-344-21	s	COIL, CHOKE 10UH
L101	1-416-344-21	s	COIL, CHOKE 10UH
L102	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L103	1-419-630-21	s	COIL, CHOKE 4.7UH
L104	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
L600	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L700	1-469-843-21	s	INDUCTOR, (SMD) 3.3UH
Q100	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q500	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q501	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q502	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q600	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q601	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q800	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)
Q801	8-729-012-34	s	TRANSISTOR 2SK711-BL(TE85L)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q802	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q803	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1100	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1102	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1103	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1104	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1105	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1106	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1107	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1108	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1200	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q1201	8-729-209-73	s	TRANSISTOR 2SA1213Y-TE12L
Q1202	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1203	8-729-140-64	s	TRANSISTOR 2SA1611T1-M5M6
Q1204	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1205	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q1206	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q1300	8-729-209-77	s	TRANSISTOR 2SC2873Y-TE12L
Q1600	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
Q1601	8-729-140-67	s	TRANSISTOR 2SC4177-T1L5L6
R100	1-208-715-11	s	RES, CHIP 22K (1005)
R101	1-208-715-11	s	RES, CHIP 22K (1005)
R102	1-208-931-81	s	RES, CHIP 68K (1005)
R103	1-208-923-81	s	RES, CHIP 33K (1005)
R104	1-208-923-81	s	RES, CHIP 33K (1005)
R109	1-208-715-11	s	RES, CHIP 22K (1005)
R118	1-208-715-11	s	RES, CHIP 22K (1005)
R132	1-208-715-11	s	RES, CHIP 22K (1005)
R134	1-208-715-11	s	RES, CHIP 22K (1005)
R139	1-208-643-11	s	RES, CHIP 22 (1005)
R140	1-208-911-81	s	RES, CHIP 10K (1005)
R141	1-208-715-11	s	RES, CHIP 22K (1005)
R142	1-208-643-11	s	RES, CHIP 22 (1005)
R143	1-208-715-11	s	RES, CHIP 22K (1005)
R144	1-208-715-11	s	RES, CHIP 22K (1005)
R145	1-208-715-11	s	RES, CHIP 22K (1005)
R146	1-208-715-11	s	RES, CHIP 22K (1005)
R147	1-208-715-11	s	RES, CHIP 22K (1005)
R148	1-208-715-11	s	RES, CHIP 22K (1005)
R149	1-208-715-11	s	RES, CHIP 22K (1005)
R150	1-208-715-11	s	RES, CHIP 22K (1005)
R151	1-208-715-11	s	RES, CHIP 22K (1005)
R152	1-208-715-11	s	RES, CHIP 22K (1005)
R153	1-208-715-11	s	RES, CHIP 22K (1005)
R154	1-208-715-11	s	RES, CHIP 22K (1005)
R155	1-208-715-11	s	RES, CHIP 22K (1005)
R156	1-208-715-11	s	RES, CHIP 22K (1005)
R157	1-208-715-11	s	RES, CHIP 22K (1005)
R158	1-208-715-11	s	RES, CHIP 22K (1005)
R159	1-208-715-11	s	RES, CHIP 22K (1005)
R160	1-208-911-81	s	RES, CHIP 10K (1005)
R161	1-208-643-11	s	RES, CHIP 22 (1005)
R162	1-208-643-11	s	RES, CHIP 22 (1005)
R163	1-208-643-11	s	RES, CHIP 22 (1005)
R167	1-208-635-11	s	RES, CHIP 10 (1005)
R168	1-208-911-81	s	RES, CHIP 10K (1005)
R169	1-208-635-11	s	RES, CHIP 10 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R170	1-208-911-81	s	RES, CHIP 10K (1005)
R171	1-208-683-11	s	RES, CHIP 1.0K (1005)
R172	1-208-643-11	s	RES, CHIP 22 (1005)
R173	1-208-715-11	s	RES, CHIP 22K (1005)
R174	1-208-643-11	s	RES, CHIP 22 (1005)
R175	1-208-643-11	s	RES, CHIP 22 (1005)
R176	1-208-635-11	s	RES, CHIP 10 (1005)
R177	1-208-643-11	s	RES, CHIP 22 (1005)
R178	1-208-643-11	s	RES, CHIP 22 (1005)
R179	1-208-643-11	s	RES, CHIP 22 (1005)
R180	1-208-643-11	s	RES, CHIP 22 (1005)
R181	1-208-643-11	s	RES, CHIP 22 (1005)
R182	1-208-643-11	s	RES, CHIP 22 (1005)
R183	1-208-643-11	s	RES, CHIP 22 (1005)
R184	1-208-683-11	s	RES, CHIP 1.0K (1005)
R185	1-208-683-11	s	RES, CHIP 1.0K (1005)
R186	1-208-683-11	s	RES, CHIP 1.0K (1005)
R187	1-208-683-11	s	RES, CHIP 1.0K (1005)
R188	1-208-683-11	s	RES, CHIP 1.0K (1005)
R189	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R190	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R191	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R192	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R193	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R194	1-208-715-11	s	RES, CHIP 22K (1005)
R200	1-208-643-11	s	RES, CHIP 22 (1005)
R201	1-208-643-11	s	RES, CHIP 22 (1005)
R202	1-208-643-11	s	RES, CHIP 22 (1005)
R203	1-208-643-11	s	RES, CHIP 22 (1005)
R204	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R206	1-208-683-11	s	RES, CHIP 1.0K (1005)
R207	1-208-683-11	s	RES, CHIP 1.0K (1005)
R301	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R302	1-208-683-11	s	RES, CHIP 1.0K (1005)
R303	1-208-683-11	s	RES, CHIP 1.0K (1005)
R304	1-208-683-11	s	RES, CHIP 1.0K (1005)
R305	1-208-683-11	s	RES, CHIP 1.0K (1005)
R306	1-208-635-11	s	RES, CHIP 10 (1005)
R307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R310	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R311	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R312	1-218-969-81	s	RES, CHIP 22K
R313	1-218-953-81	s	RES, CHIP 1.0K
R315	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R316	1-218-941-11	s	RES, CHIP 100 (1005)
R317	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R318	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R319	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R320	1-218-941-11	s	RES, CHIP 100 (1005)
R321	1-218-941-11	s	RES, CHIP 100 (1005)
R322	1-218-941-11	s	RES, CHIP 100 (1005)
R323	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R324	1-218-941-11	s	RES, CHIP 100 (1005)
R325	1-218-941-11	s	RES, CHIP 100 (1005)
R326	1-218-941-11	s	RES, CHIP 100 (1005)
R327	1-218-941-11	s	RES, CHIP 100 (1005)
R328	1-218-941-11	s	RES, CHIP 100 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R329	1-208-911-81	s	RES, CHIP 10K (1005)
R330	1-208-911-81	s	RES, CHIP 10K (1005)
R331	1-208-911-81	s	RES, CHIP 10K (1005)
R332	1-208-643-11	s	RES, CHIP 22 (1005)
R333	1-208-643-11	s	RES, CHIP 22 (1005)
R334	1-208-643-11	s	RES, CHIP 22 (1005)
R335	1-218-941-11	s	RES, CHIP 100 (1005)
R336	1-218-941-11	s	RES, CHIP 100 (1005)
R337	1-218-941-11	s	RES, CHIP 100 (1005)
R338	1-218-941-11	s	RES, CHIP 100 (1005)
R343	1-208-643-11	s	RES, CHIP 22 (1005)
R344	1-208-643-11	s	RES, CHIP 22 (1005)
R345	1-208-643-11	s	RES, CHIP 22 (1005)
R347	1-208-643-11	s	RES, CHIP 22 (1005)
R348	1-208-643-11	s	RES, CHIP 22 (1005)
R349	1-208-643-11	s	RES, CHIP 22 (1005)
R350	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R351	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R352	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R353	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R354	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R355	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R357	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R358	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R359	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R361	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R362	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R363	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R364	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R365	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R366	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R367	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R368	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R369	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R370	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R371	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R372	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R373	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R374	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R375	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R376	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R377	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R378	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R379	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R380	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R381	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R382	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R383	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R384	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R385	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R386	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R387	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R388	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R389	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R390	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R402	1-208-935-81	s	RES, CHIP 100K (1005)
R403	1-208-911-81	s	RES, CHIP 10K (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R404	1-208-911-81	s	RES, CHIP 10K (1005)
R405	1-208-911-81	s	RES, CHIP 10K (1005)
R406	1-208-911-81	s	RES, CHIP 10K (1005)
R407	1-208-643-11	s	RES, CHIP 22 (1005)
R408	1-208-643-11	s	RES, CHIP 22 (1005)
R409	1-208-643-11	s	RES, CHIP 22 (1005)
R410	1-208-643-11	s	RES, CHIP 22 (1005)
R411	1-208-935-81	s	RES, CHIP 100K (1005)
R412	1-208-935-81	s	RES, CHIP 100K (1005)
R413	1-208-911-81	s	RES, CHIP 10K (1005)
R414	1-208-911-81	s	RES, CHIP 10K (1005)
R415	1-208-911-81	s	RES, CHIP 10K (1005)
R417	1-218-941-11	s	RES, CHIP 100 (1005)
R418	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R419	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R424	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R425	1-218-941-11	s	RES, CHIP 100 (1005)
R426	1-220-874-81	s	RES, CHIP 15 (1005)
R427	1-220-874-81	s	RES, CHIP 15 (1005)
R428	1-218-941-11	s	RES, CHIP 100 (1005)
R429	1-218-941-11	s	RES, CHIP 100 (1005)
R430	1-208-879-81	s	RES, CHIP 470 (1005)
R431	1-208-879-81	s	RES, CHIP 470 (1005)
R432	1-218-941-11	s	RES, CHIP 100 (1005)
R433	1-208-635-11	s	RES, CHIP 10 (1005)
R434	1-208-635-11	s	RES, CHIP 10 (1005)
R435	1-220-874-81	s	RES, CHIP 15 (1005)
R436	1-208-635-11	s	RES, CHIP 10 (1005)
R438	1-220-874-81	s	RES, CHIP 15 (1005)
R439	1-208-635-11	s	RES, CHIP 10 (1005)
R440	1-208-715-11	s	RES, CHIP 22K (1005)
R441	1-208-911-81	s	RES, CHIP 10K (1005)
R442	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R443	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R444	1-208-683-11	s	RES, CHIP 1.0K (1005)
R445	1-208-715-11	s	RES, CHIP 22K (1005)
R446	1-208-715-11	s	RES, CHIP 22K (1005)
R447	1-208-683-11	s	RES, CHIP 1.0K (1005)
R448	1-208-715-11	s	RES, CHIP 22K (1005)
R449	1-208-715-11	s	RES, CHIP 22K (1005)
R450	1-208-643-11	s	RES, CHIP 22 (1005)
R451	1-208-715-11	s	RES, CHIP 22K (1005)
R452	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R453	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R455	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R456	1-208-911-81	s	RES, CHIP 10K (1005)
R458	1-208-635-11	s	RES, CHIP 10 (1005)
R460	1-208-911-81	s	RES, CHIP 10K (1005)
R461	1-208-911-81	s	RES, CHIP 10K (1005)
R463	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R500	1-208-643-11	s	RES, CHIP 22 (1005)
R501	1-208-643-11	s	RES, CHIP 22 (1005)
R502	1-208-643-11	s	RES, CHIP 22 (1005)
R503	1-208-643-11	s	RES, CHIP 22 (1005)
R504	1-208-643-11	s	RES, CHIP 22 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R505	1-208-715-11	s	RES, CHIP 22K (1005)
R506	1-208-715-11	s	RES, CHIP 22K (1005)
R507	1-208-867-81	s	RES, CHIP 150 (1005)
R508	1-208-867-81	s	RES, CHIP 150 (1005)
R509	1-208-867-81	s	RES, CHIP 150 (1005)
R510	1-208-715-11	s	RES, CHIP 22K (1005)
R511	1-208-715-11	s	RES, CHIP 22K (1005)
R512	1-208-715-11	s	RES, CHIP 22K (1005)
R513	1-208-715-11	s	RES, CHIP 22K (1005)
R514	1-208-715-11	s	RES, CHIP 22K (1005)
R515	1-208-715-11	s	RES, CHIP 22K (1005)
R516	1-208-715-11	s	RES, CHIP 22K (1005)
R517	1-208-715-11	s	RES, CHIP 22K (1005)
R518	1-208-855-81	s	RES, CHIP 47 (1005)
R519	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R520	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R521	1-208-855-81	s	RES, CHIP 47 (1005)
R522	1-208-855-81	s	RES, CHIP 47 (1005)
R523	1-208-855-81	s	RES, CHIP 47 (1005)
R524	1-208-855-81	s	RES, CHIP 47 (1005)
R525	1-208-855-81	s	RES, CHIP 47 (1005)
R526	1-208-855-81	s	RES, CHIP 47 (1005)
R527	1-208-855-81	s	RES, CHIP 47 (1005)
R528	1-208-855-81	s	RES, CHIP 47 (1005)
R529	1-208-855-81	s	RES, CHIP 47 (1005)
R530	1-208-855-81	s	RES, CHIP 47 (1005)
R531	1-208-855-81	s	RES, CHIP 47 (1005)
R532	1-208-855-81	s	RES, CHIP 47 (1005)
R533	1-208-855-81	s	RES, CHIP 47 (1005)
R534	1-208-855-81	s	RES, CHIP 47 (1005)
R535	1-208-855-81	s	RES, CHIP 47 (1005)
R536	1-208-855-81	s	RES, CHIP 47 (1005)
R537	1-208-855-81	s	RES, CHIP 47 (1005)
R538	1-208-855-81	s	RES, CHIP 47 (1005)
R539	1-208-855-81	s	RES, CHIP 47 (1005)
R540	1-208-855-81	s	RES, CHIP 47 (1005)
R541	1-208-911-81	s	RES, CHIP 10K (1005)
R542	1-208-911-81	s	RES, CHIP 10K (1005)
R543	1-208-911-81	s	RES, CHIP 10K (1005)
R544	1-208-911-81	s	RES, CHIP 10K (1005)
R545	1-208-911-81	s	RES, CHIP 10K (1005)
R546	1-208-715-11	s	RES, CHIP 22K (1005)
R547	1-208-715-11	s	RES, CHIP 22K (1005)
R548	1-208-715-11	s	RES, CHIP 22K (1005)
R549	1-208-715-11	s	RES, CHIP 22K (1005)
R550	1-208-715-11	s	RES, CHIP 22K (1005)
R551	1-208-715-11	s	RES, CHIP 22K (1005)
R552	1-208-855-81	s	RES, CHIP 47 (1005)
R553	1-208-715-11	s	RES, CHIP 22K (1005)
R554	1-208-715-11	s	RES, CHIP 22K (1005)
R555	1-208-715-11	s	RES, CHIP 22K (1005)
R556	1-208-715-11	s	RES, CHIP 22K (1005)
R557	1-208-855-81	s	RES, CHIP 47 (1005)
R558	1-208-855-81	s	RES, CHIP 47 (1005)
R559	1-208-855-81	s	RES, CHIP 47 (1005)
R560	1-208-855-81	s	RES, CHIP 47 (1005)
R561	1-208-855-81	s	RES, CHIP 47 (1005)
R562	1-208-855-81	s	RES, CHIP 47 (1005)
R563	1-208-855-81	s	RES, CHIP 47 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R564	1-208-855-81	s	RES, CHIP 47 (1005)
R565	1-208-855-81	s	RES, CHIP 47 (1005)
R566	1-208-855-81	s	RES, CHIP 47 (1005)
R567	1-208-855-81	s	RES, CHIP 47 (1005)
R568	1-208-855-81	s	RES, CHIP 47 (1005)
R569	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R570	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R571	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R572	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R573	1-208-855-81	s	RES, CHIP 47 (1005)
R574	1-208-855-81	s	RES, CHIP 47 (1005)
R575	1-208-855-81	s	RES, CHIP 47 (1005)
R576	1-208-855-81	s	RES, CHIP 47 (1005)
R577	1-208-855-81	s	RES, CHIP 47 (1005)
R578	1-208-855-81	s	RES, CHIP 47 (1005)
R579	1-208-855-81	s	RES, CHIP 47 (1005)
R580	1-208-855-81	s	RES, CHIP 47 (1005)
R581	1-208-715-11	s	RES, CHIP 22K (1005)
R582	1-208-715-11	s	RES, CHIP 22K (1005)
R583	1-208-715-11	s	RES, CHIP 22K (1005)
R584	1-208-643-11	s	RES, CHIP 22 (1005)
R585	1-208-643-11	s	RES, CHIP 22 (1005)
R586	1-208-643-11	s	RES, CHIP 22 (1005)
R587	1-208-683-11	s	RES, CHIP 1.0K (1005)
R588	1-208-683-11	s	RES, CHIP 1.0K (1005)
R589	1-208-683-11	s	RES, CHIP 1.0K (1005)
R590	1-208-911-81	s	RES, CHIP 10K (1005)
R591	1-208-935-81	s	RES, CHIP 100K (1005)
R592	1-208-935-81	s	RES, CHIP 100K (1005)
R593	1-208-935-81	s	RES, CHIP 100K (1005)
R594	1-208-855-81	s	RES, CHIP 47 (1005)
R595	1-208-855-81	s	RES, CHIP 47 (1005)
R596	1-208-855-81	s	RES, CHIP 47 (1005)
R597	1-208-635-11	s	RES, CHIP 10 (1005)
R598	1-208-855-81	s	RES, CHIP 47 (1005)
R599	1-208-855-81	s	RES, CHIP 47 (1005)
R600	1-208-715-11	s	RES, CHIP 22K (1005)
R601	1-208-715-11	s	RES, CHIP 22K (1005)
R602	1-208-715-11	s	RES, CHIP 22K (1005)
R615	1-208-715-11	s	RES, CHIP 22K (1005)
R620	1-208-643-11	s	RES, CHIP 22 (1005)
R622	1-208-643-11	s	RES, CHIP 22 (1005)
R624	1-208-643-11	s	RES, CHIP 22 (1005)
R626	1-208-643-11	s	RES, CHIP 22 (1005)
R635	1-208-715-11	s	RES, CHIP 22K (1005)
R641	1-208-911-81	s	RES, CHIP 10K (1005)
R642	1-208-715-11	s	RES, CHIP 22K (1005)
R643	1-208-715-11	s	RES, CHIP 22K (1005)
R644	1-208-643-11	s	RES, CHIP 22 (1005)
R645	1-208-715-11	s	RES, CHIP 22K (1005)
R646	1-208-715-11	s	RES, CHIP 22K (1005)
R647	1-208-715-11	s	RES, CHIP 22K (1005)
R648	1-208-715-11	s	RES, CHIP 22K (1005)
R649	1-208-715-11	s	RES, CHIP 22K (1005)
R650	1-208-715-11	s	RES, CHIP 22K (1005)
R651	1-208-715-11	s	RES, CHIP 22K (1005)
R652	1-208-715-11	s	RES, CHIP 22K (1005)
R653	1-208-715-11	s	RES, CHIP 22K (1005)
R654	1-208-715-11	s	RES, CHIP 22K (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R655	1-208-715-11	s	RES, CHIP 22K (1005)
R656	1-208-715-11	s	RES, CHIP 22K (1005)
R657	1-208-715-11	s	RES, CHIP 22K (1005)
R658	1-208-715-11	s	RES, CHIP 22K (1005)
R659	1-208-715-11	s	RES, CHIP 22K (1005)
R660	1-208-715-11	s	RES, CHIP 22K (1005)
R661	1-208-715-11	s	RES, CHIP 22K (1005)
R662	1-208-715-11	s	RES, CHIP 22K (1005)
R663	1-208-911-81	s	RES, CHIP 10K (1005)
R664	1-208-643-11	s	RES, CHIP 22 (1005)
R665	1-208-643-11	s	RES, CHIP 22 (1005)
R666	1-208-643-11	s	RES, CHIP 22 (1005)
R667	1-208-867-81	s	RES, CHIP 150 (1005)
R668	1-208-867-81	s	RES, CHIP 150 (1005)
R669	1-208-715-11	s	RES, CHIP 22K (1005)
R670	1-208-643-11	s	RES, CHIP 22 (1005)
R671	1-208-643-11	s	RES, CHIP 22 (1005)
R672	1-208-635-11	s	RES, CHIP 10 (1005)
R673	1-208-635-11	s	RES, CHIP 10 (1005)
R674	1-208-635-11	s	RES, CHIP 10 (1005)
R676	1-208-683-11	s	RES, CHIP 1.0K (1005)
R677	1-208-683-11	s	RES, CHIP 1.0K (1005)
R678	1-208-643-11	s	RES, CHIP 22 (1005)
R679	1-208-683-11	s	RES, CHIP 1.0K (1005)
R680	1-208-683-11	s	RES, CHIP 1.0K (1005)
R681	1-208-683-11	s	RES, CHIP 1.0K (1005)
R682	1-208-683-11	s	RES, CHIP 1.0K (1005)
R683	1-208-643-11	s	RES, CHIP 22 (1005)
R684	1-208-643-11	s	RES, CHIP 22 (1005)
R685	1-208-643-11	s	RES, CHIP 22 (1005)
R686	1-208-643-11	s	RES, CHIP 22 (1005)
R687	1-208-643-11	s	RES, CHIP 22 (1005)
R688	1-208-643-11	s	RES, CHIP 22 (1005)
R689	1-208-643-11	s	RES, CHIP 22 (1005)
R690	1-208-911-81	s	RES, CHIP 10K (1005)
R691	1-208-635-11	s	RES, CHIP 10 (1005)
R692	1-208-643-11	s	RES, CHIP 22 (1005)
R693	1-208-643-11	s	RES, CHIP 22 (1005)
R694	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R696	1-208-683-11	s	RES, CHIP 1.0K (1005)
R697	1-208-715-11	s	RES, CHIP 22K (1005)
R698	1-208-715-11	s	RES, CHIP 22K (1005)
R699	1-208-911-81	s	RES, CHIP 10K (1005)
R700	1-208-855-81	s	RES, CHIP 47 (1005)
R701	1-208-855-81	s	RES, CHIP 47 (1005)
R702	1-208-691-11	s	RES, CHIP 2.2K (1005)
R703	1-208-691-11	s	RES, CHIP 2.2K (1005)
R704	1-208-683-11	s	RES, CHIP 1.0K (1005)
R705	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R707	1-208-911-81	s	RES, CHIP 10K (1005)
R708	1-208-889-81	s	RES, CHIP 1.2K (1005)
R709	1-208-911-81	s	RES, CHIP 10K (1005)
R710	1-208-881-81	s	RES, CHIP 560 (1005)
R711	1-208-691-11	s	RES, CHIP 2.2K (1005)
R712	1-218-941-11	s	RES, CHIP 100 (1005)
R713	1-208-871-81	s	RES, CHIP 220 (1005)
R714	1-208-911-81	s	RES, CHIP 10K (1005)
R715	1-208-699-11	s	RES, CHIP 4.7K (1005)
R716	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R718	1-208-683-11	s	RES, CHIP 1.0K (1005)
R719	1-208-855-81	s	RES, CHIP 47 (1005)
R720	1-208-911-81	s	RES, CHIP 10K (1005)
R721	1-208-911-81	s	RES, CHIP 10K (1005)
R722	1-208-635-11	s	RES, CHIP 10 (1005)
R723	1-208-635-11	s	RES, CHIP 10 (1005)
R724	1-208-635-11	s	RES, CHIP 10 (1005)
R725	1-208-683-11	s	RES, CHIP 1.0K (1005)
R726	1-208-683-11	s	RES, CHIP 1.0K (1005)
R727	1-208-683-11	s	RES, CHIP 1.0K (1005)
R728	1-208-855-81	s	RES, CHIP 47 (1005)
R729	1-208-855-81	s	RES, CHIP 47 (1005)
R730	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R733	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R734	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R736	1-208-911-81	s	RES, CHIP 10K (1005)
R737	1-208-683-11	s	RES, CHIP 1.0K (1005)
R738	1-208-683-11	s	RES, CHIP 1.0K (1005)
R739	1-208-635-11	s	RES, CHIP 10 (1005)
R740	1-208-855-81	s	RES, CHIP 47 (1005)
R852	1-208-683-11	s	RES, CHIP 1.0K (1005)
R853	1-208-683-11	s	RES, CHIP 1.0K (1005)
R854	1-208-699-11	s	RES, CHIP 4.7K (1005)
R855	1-208-715-11	s	RES, CHIP 22K (1005)
R856	1-208-911-81	s	RES, CHIP 10K (1005)
R857	1-208-905-81	s	RES, CHIP 5.6K (1005)
R858	1-208-911-81	s	RES, CHIP 10K (1005)
R859	1-208-695-11	s	RES, CHIP 3.3K (1005)
R860	1-208-695-11	s	RES, CHIP 3.3K (1005)
R861	1-208-911-81	s	RES, CHIP 10K (1005)
R862	1-208-911-81	s	RES, CHIP 10K (1005)
R863	1-208-911-81	s	RES, CHIP 10K (1005)
R864	1-218-989-11	s	RES, CHIP 1M (1005)
R865	1-208-695-11	s	RES, CHIP 3.3K (1005)
R866	1-208-911-81	s	RES, CHIP 10K (1005)
R867	1-208-893-81	s	RES, CHIP 1.8K (1005)
R868	1-208-943-81	s	RES, CHIP 220K (1005)
R869	1-208-879-81	s	RES, CHIP 470 (1005)
R870	1-208-911-81	s	RES, CHIP 10K (1005)
R871	1-208-947-81	s	RES, CHIP 330K (1005)
R872	1-208-911-81	s	RES, CHIP 10K (1005)
R873	1-208-947-81	s	RES, CHIP 330K (1005)
R874	1-208-947-81	s	RES, CHIP 330K (1005)
R875	1-208-911-81	s	RES, CHIP 10K (1005)
R876	1-208-715-11	s	RES, CHIP 22K (1005)
R877	1-208-947-81	s	RES, CHIP 330K (1005)
R878	1-208-911-81	s	RES, CHIP 10K (1005)
R879	1-208-911-81	s	RES, CHIP 10K (1005)
R880	1-208-715-11	s	RES, CHIP 22K (1005)
R881	1-208-905-81	s	RES, CHIP 5.6K (1005)
R882	1-208-871-81	s	RES, CHIP 220 (1005)
R883	1-208-911-81	s	RES, CHIP 10K (1005)
R884	1-208-911-81	s	RES, CHIP 10K (1005)
R885	1-208-683-11	s	RES, CHIP 1.0K (1005)
R886	1-208-911-81	s	RES, CHIP 10K (1005)
R887	1-208-711-11	s	RES, CHIP 15K (1005)
R888	1-208-855-81	s	RES, CHIP 47 (1005)
R889	1-208-855-81	s	RES, CHIP 47 (1005)
R890	1-208-855-81	s	RES, CHIP 47 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R891	1-208-855-81	s	RES, CHIP 47 (1005)
R892	1-208-911-81	s	RES, CHIP 10K (1005)
R893	1-208-911-81	s	RES, CHIP 10K (1005)
R912	1-208-911-81	s	RES, CHIP 10K (1005)
R913	1-208-635-11	s	RES, CHIP 10 (1005)
R914	1-208-683-11	s	RES, CHIP 1.0K (1005)
R915	1-208-643-11	s	RES, CHIP 22 (1005)
R916	1-208-643-11	s	RES, CHIP 22 (1005)
R918	1-208-643-11	s	RES, CHIP 22 (1005)
R919	1-208-643-11	s	RES, CHIP 22 (1005)
R920	1-208-643-11	s	RES, CHIP 22 (1005)
R921	1-208-643-11	s	RES, CHIP 22 (1005)
R922	1-208-643-11	s	RES, CHIP 22 (1005)
R923	1-208-643-11	s	RES, CHIP 22 (1005)
R927	1-208-911-81	s	RES, CHIP 10K (1005)
R928	1-208-911-81	s	RES, CHIP 10K (1005)
R929	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R930	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R931	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R932	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R933	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R934	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R935	1-208-643-11	s	RES, CHIP 22 (1005)
R936	1-208-643-11	s	RES, CHIP 22 (1005)
R937	1-208-911-81	s	RES, CHIP 10K (1005)
R938	1-208-927-81	s	RES, CHIP 47K (1005)
R939	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R940	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R941	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R942	1-218-969-81	s	RES, CHIP 22K
R943	1-218-953-81	s	RES, CHIP 1.0K
R944	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R945	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R947	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R948	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R949	1-208-911-81	s	RES, CHIP 10K (1005)
R950	1-208-911-81	s	RES, CHIP 10K (1005)
R951	1-208-643-11	s	RES, CHIP 22 (1005)
R952	1-208-643-11	s	RES, CHIP 22 (1005)
R953	1-208-643-11	s	RES, CHIP 22 (1005)
R954	1-218-941-11	s	RES, CHIP 100 (1005)
R955	1-218-941-11	s	RES, CHIP 100 (1005)
R956	1-218-941-11	s	RES, CHIP 100 (1005)
R957	1-218-941-11	s	RES, CHIP 100 (1005)
R958	1-208-643-11	s	RES, CHIP 22 (1005)
R959	1-218-953-81	s	RES, CHIP 1.0K
R960	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R961	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R962	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R963	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R964	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R965	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R966	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R967	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R968	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R969	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R970	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R971	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R972	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R973	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R974	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R975	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R976	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R977	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R978	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R979	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R980	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R981	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R982	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R983	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R984	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R985	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R986	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R987	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R988	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R989	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R990	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R991	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R992	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R993	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R994	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R995	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R996	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R997	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R998	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1005	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1006	1-208-911-81	s	RES, CHIP 10K (1005)
R1007	1-208-911-81	s	RES, CHIP 10K (1005)
R1008	1-208-911-81	s	RES, CHIP 10K (1005)
R1009	1-208-943-81	s	RES, CHIP 220K (1005)
R1010	1-208-927-81	s	RES, CHIP 47K (1005)
R1011	1-208-935-81	s	RES, CHIP 100K (1005)
R1012	1-208-918-81	s	RES, CHIP 20K (1005)
R1013	1-208-927-81	s	RES, CHIP 47K (1005)
R1014	1-208-911-81	s	RES, CHIP 10K (1005)
R1015	1-208-918-81	s	RES, CHIP 20K (1005)
R1016	1-208-911-81	s	RES, CHIP 10K (1005)
R1017	1-208-911-81	s	RES, CHIP 10K (1005)
R1018	1-208-911-81	s	RES, CHIP 10K (1005)
R1100	1-208-911-81	s	RES, CHIP 10K (1005)
R1101	1-208-911-81	s	RES, CHIP 10K (1005)
R1102	1-208-911-81	s	RES, CHIP 10K (1005)
R1103	1-208-911-81	s	RES, CHIP 10K (1005)
R1106	1-208-911-81	s	RES, CHIP 10K (1005)
R1107	1-208-911-81	s	RES, CHIP 10K (1005)
R1108	1-208-911-81	s	RES, CHIP 10K (1005)
R1109	1-208-911-81	s	RES, CHIP 10K (1005)
R1110	1-208-911-81	s	RES, CHIP 10K (1005)
R1111	1-208-935-81	s	RES, CHIP 100K (1005)
R1112	1-208-935-81	s	RES, CHIP 100K (1005)
R1113	1-208-935-81	s	RES, CHIP 100K (1005)
R1114	1-208-935-81	s	RES, CHIP 100K (1005)
R1115	1-208-935-81	s	RES, CHIP 100K (1005)
R1116	1-208-935-81	s	RES, CHIP 100K (1005)
R1117	1-208-935-81	s	RES, CHIP 100K (1005)
R1118	1-208-935-81	s	RES, CHIP 100K (1005)
R1119	1-208-911-81	s	RES, CHIP 10K (1005)
R1120	1-208-911-81	s	RES, CHIP 10K (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1123	1-208-911-81	s	RES, CHIP 10K (1005)
R1124	1-208-911-81	s	RES, CHIP 10K (1005)
R1125	1-208-911-81	s	RES, CHIP 10K (1005)
R1126	1-208-911-81	s	RES, CHIP 10K (1005)
R1127	1-208-715-11	s	RES, CHIP 22K (1005)
R1128	1-208-715-11	s	RES, CHIP 22K (1005)
R1129	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1130	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1131	1-208-927-81	s	RES, CHIP 47K (1005)
R1132	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1133	1-208-927-81	s	RES, CHIP 47K (1005)
R1134	1-208-911-81	s	RES, CHIP 10K (1005)
R1135	1-208-911-81	s	RES, CHIP 10K (1005)
R1136	1-208-911-81	s	RES, CHIP 10K (1005)
R1137	1-208-911-81	s	RES, CHIP 10K (1005)
R1138	1-208-911-81	s	RES, CHIP 10K (1005)
R1139	1-208-911-81	s	RES, CHIP 10K (1005)
R1140	1-208-911-81	s	RES, CHIP 10K (1005)
R1141	1-208-911-81	s	RES, CHIP 10K (1005)
R1142	1-208-911-81	s	RES, CHIP 10K (1005)
R1143	1-208-911-81	s	RES, CHIP 10K (1005)
R1144	1-208-911-81	s	RES, CHIP 10K (1005)
R1145	1-208-911-81	s	RES, CHIP 10K (1005)
R1146	1-208-911-81	s	RES, CHIP 10K (1005)
R1147	1-208-911-81	s	RES, CHIP 10K (1005)
R1148	1-208-911-81	s	RES, CHIP 10K (1005)
R1149	1-208-911-81	s	RES, CHIP 10K (1005)
R1150	1-208-911-81	s	RES, CHIP 10K (1005)
R1151	1-208-911-81	s	RES, CHIP 10K (1005)
R1152	1-208-911-81	s	RES, CHIP 10K (1005)
R1153	1-208-911-81	s	RES, CHIP 10K (1005)
R1154	1-208-911-81	s	RES, CHIP 10K (1005)
R1155	1-208-935-81	s	RES, CHIP 100K (1005)
R1156	1-208-935-81	s	RES, CHIP 100K (1005)
R1157	1-208-935-81	s	RES, CHIP 100K (1005)
R1158	1-208-935-81	s	RES, CHIP 100K (1005)
R1159	1-208-911-81	s	RES, CHIP 10K (1005)
R1160	1-208-911-81	s	RES, CHIP 10K (1005)
R1163	1-208-911-81	s	RES, CHIP 10K (1005)
R1164	1-208-911-81	s	RES, CHIP 10K (1005)
R1165	1-208-911-81	s	RES, CHIP 10K (1005)
R1166	1-208-911-81	s	RES, CHIP 10K (1005)
R1167	1-208-943-81	s	RES, CHIP 220K (1005)
R1168	1-208-943-81	s	RES, CHIP 220K (1005)
R1169	1-208-935-81	s	RES, CHIP 100K (1005)
R1170	1-208-935-81	s	RES, CHIP 100K (1005)
R1171	1-208-911-81	s	RES, CHIP 10K (1005)
R1172	1-208-911-81	s	RES, CHIP 10K (1005)
R1173	1-208-911-81	s	RES, CHIP 10K (1005)
R1174	1-208-911-81	s	RES, CHIP 10K (1005)
R1175	1-208-911-81	s	RES, CHIP 10K (1005)
R1176	1-208-911-81	s	RES, CHIP 10K (1005)
R1177	1-208-935-81	s	RES, CHIP 100K (1005)
R1178	1-208-935-81	s	RES, CHIP 100K (1005)
R1181	1-208-911-81	s	RES, CHIP 10K (1005)
R1183	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1184	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1185	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1186	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1192 *b	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1193 *b	1-208-911-81	s	RES, CHIP 10K (1005)
R1200	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1202	1-218-989-11	s	RES, CHIP 1M (1005)
R1203	1-218-989-11	s	RES, CHIP 1M (1005)
R1204	1-208-889-81	s	RES, CHIP 1.2K (1005)
R1205	1-208-889-81	s	RES, CHIP 1.2K (1005)
R1206	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1208	1-208-889-81	s	RES, CHIP 1.2K (1005)
R1209	1-208-889-81	s	RES, CHIP 1.2K (1005)
R1210	1-208-889-81	s	RES, CHIP 1.2K (1005)
R1211	1-208-889-81	s	RES, CHIP 1.2K (1005)
R1212	1-220-882-81	s	RES, CHIP 33 (1005)
R1214	1-208-911-81	s	RES, CHIP 10K (1005)
R1215	1-208-911-81	s	RES, CHIP 10K (1005)
R1216	1-218-941-11	s	RES, CHIP 100 (1005)
R1217	1-218-941-11	s	RES, CHIP 100 (1005)
R1218	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1219	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1220	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1221	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1222	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1223	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1226	1-208-911-81	s	RES, CHIP 10K (1005)
R1227	1-220-882-81	s	RES, CHIP 33 (1005)
R1228	1-220-882-81	s	RES, CHIP 33 (1005)
R1229	1-220-882-81	s	RES, CHIP 33 (1005)
R1230	1-220-882-81	s	RES, CHIP 33 (1005)
R1231	1-208-715-11	s	RES, CHIP 22K (1005)
R1232	1-220-882-81	s	RES, CHIP 33 (1005)
R1233	1-208-911-81	s	RES, CHIP 10K (1005)
R1234	1-208-911-81	s	RES, CHIP 10K (1005)
R1235	1-218-941-11	s	RES, CHIP 100 (1005)
R1236	1-218-941-11	s	RES, CHIP 100 (1005)
R1237	1-208-911-81	s	RES, CHIP 10K (1005)
R1238	1-220-882-81	s	RES, CHIP 33 (1005)
R1239	1-220-882-81	s	RES, CHIP 33 (1005)
R1240	1-208-911-81	s	RES, CHIP 10K (1005)
R1241	1-208-911-81	s	RES, CHIP 10K (1005)
R1242	1-208-911-81	s	RES, CHIP 10K (1005)
R1243	1-208-911-81	s	RES, CHIP 10K (1005)
R1244	1-208-911-81	s	RES, CHIP 10K (1005)
R1245	1-208-721-11	s	RES, CHIP 39K (1005)
R1246	1-208-867-81	s	RES, CHIP 150 (1005)
R1247	1-208-913-81	s	RES, CHIP 12K (1005)
R1248	1-208-721-11	s	RES, CHIP 39K (1005)
R1249	1-208-721-11	s	RES, CHIP 39K (1005)
R1250	1-208-867-81	s	RES, CHIP 150 (1005)
R1251	1-208-947-81	s	RES, CHIP 330K (1005)
R1252	1-208-867-81	s	RES, CHIP 150 (1005)
R1253	1-208-913-81	s	RES, CHIP 12K (1005)
R1254	1-208-715-11	s	RES, CHIP 22K (1005)
R1255	1-208-911-81	s	RES, CHIP 10K (1005)
R1256	1-208-911-81	s	RES, CHIP 10K (1005)
R1257	1-208-913-81	s	RES, CHIP 12K (1005)
R1258	1-208-715-11	s	RES, CHIP 22K (1005)
R1259	1-208-711-11	s	RES, CHIP 15K (1005)
R1260	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1261	1-218-941-11	s	RES, CHIP 100 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1300	1-208-911-81	s	RES, CHIP 10K (1005)
R1301	1-208-911-81	s	RES, CHIP 10K (1005)
R1302	1-208-911-81	s	RES, CHIP 10K (1005)
R1303	1-208-911-81	s	RES, CHIP 10K (1005)
R1304	1-208-911-81	s	RES, CHIP 10K (1005)
R1305	1-208-911-81	s	RES, CHIP 10K (1005)
R1306	1-218-941-11	s	RES, CHIP 100 (1005)
R1307	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1308	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1309	1-208-911-81	s	RES, CHIP 10K (1005)
R1310	1-208-911-81	s	RES, CHIP 10K (1005)
R1311	1-208-911-81	s	RES, CHIP 10K (1005)
R1312	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1313	1-208-911-81	s	RES, CHIP 10K (1005)
R1314	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1315	1-208-911-81	s	RES, CHIP 10K (1005)
R1316	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1317	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1318	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1319	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1320	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1321	1-208-893-81	s	RES, CHIP 1.8K (1005)
R1322	1-208-909-81	s	RES, CHIP 8.2K (1005)
R1323	1-208-715-11	s	RES, CHIP 22K (1005)
R1324	1-208-715-11	s	RES, CHIP 22K (1005)
R1325	1-208-715-11	s	RES, CHIP 22K (1005)
R1326	1-208-923-81	s	RES, CHIP 33K (1005)
R1327	1-208-715-11	s	RES, CHIP 22K (1005)
R1328	1-208-931-81	s	RES, CHIP 68K (1005)
R1329	1-208-935-81	s	RES, CHIP 100K (1005)
R1330	1-208-935-81	s	RES, CHIP 100K (1005)
R1331	1-208-931-81	s	RES, CHIP 68K (1005)
R1332	1-208-931-81	s	RES, CHIP 68K (1005)
R1333	1-208-715-11	s	RES, CHIP 22K (1005)
R1334	1-208-715-11	s	RES, CHIP 22K (1005)
R1335	1-208-927-81	s	RES, CHIP 47K (1005)
R1336	1-208-927-81	s	RES, CHIP 47K (1005)
R1337	1-208-927-81	s	RES, CHIP 47K (1005)
R1338	1-208-927-81	s	RES, CHIP 47K (1005)
R1339	1-208-923-81	s	RES, CHIP 33K (1005)
R1340	1-208-931-81	s	RES, CHIP 68K (1005)
R1341	1-208-931-81	s	RES, CHIP 68K (1005)
R1342	1-208-935-81	s	RES, CHIP 100K (1005)
R1343	1-208-931-81	s	RES, CHIP 68K (1005)
R1344	1-208-935-81	s	RES, CHIP 100K (1005)
R1345	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1346	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1347	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1348	1-208-913-81	s	RES, CHIP 12K (1005)
R1349	1-208-913-81	s	RES, CHIP 12K (1005)
R1350	1-208-913-81	s	RES, CHIP 12K (1005)
R1351	1-208-911-81	s	RES, CHIP 10K (1005)
R1352	1-208-911-81	s	RES, CHIP 10K (1005)
R1353	1-208-911-81	s	RES, CHIP 10K (1005)
R1354	1-208-715-11	s	RES, CHIP 22K (1005)
R1355	1-208-715-11	s	RES, CHIP 22K (1005)
R1356	1-208-715-11	s	RES, CHIP 22K (1005)
R1357	1-220-882-81	s	RES, CHIP 33 (1005)
R1358	1-220-882-81	s	RES, CHIP 33 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1359	1-220-882-81	s	RES, CHIP 33 (1005)
R1360	1-208-931-81	s	RES, CHIP 68K (1005)
R1361	1-208-931-81	s	RES, CHIP 68K (1005)
R1362	1-208-715-11	s	RES, CHIP 22K (1005)
R1363	1-208-715-11	s	RES, CHIP 22K (1005)
R1364	1-208-715-11	s	RES, CHIP 22K (1005)
R1365	1-208-715-11	s	RES, CHIP 22K (1005)
R1366	1-208-931-81	s	RES, CHIP 68K (1005)
R1367	1-208-931-81	s	RES, CHIP 68K (1005)
R1368	1-208-931-81	s	RES, CHIP 68K (1005)
R1369	1-208-931-81	s	RES, CHIP 68K (1005)
R1370	1-208-927-81	s	RES, CHIP 47K (1005)
R1371	1-208-927-81	s	RES, CHIP 47K (1005)
R1372	1-208-911-81	s	RES, CHIP 10K (1005)
R1373	1-208-911-81	s	RES, CHIP 10K (1005)
R1374	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1375	1-208-891-81	s	RES, CHIP 1.5K (1005)
R1376	1-208-911-81	s	RES, CHIP 10K (1005)
R1377	1-208-911-81	s	RES, CHIP 10K (1005)
R1378	1-208-911-81	s	RES, CHIP 10K (1005)
R1379	1-208-911-81	s	RES, CHIP 10K (1005)
R1380	1-208-911-81	s	RES, CHIP 10K (1005)
R1381	1-208-911-81	s	RES, CHIP 10K (1005)
R1382	1-208-911-81	s	RES, CHIP 10K (1005)
R1383	1-208-911-81	s	RES, CHIP 10K (1005)
R1384	1-208-911-81	s	RES, CHIP 10K (1005)
R1385	1-208-713-11	s	RES, CHIP 18K (1005)
R1386	1-208-713-11	s	RES, CHIP 18K (1005)
R1387	1-208-947-81	s	RES, CHIP 330K (1005)
R1388	1-208-947-81	s	RES, CHIP 330K (1005)
R1389	1-208-947-81	s	RES, CHIP 330K (1005)
R1390	1-208-947-81	s	RES, CHIP 330K (1005)
R1391	1-208-955-81	s	RES, CHIP 680K (1005)
R1392	1-208-955-81	s	RES, CHIP 680K (1005)
R1393	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1394	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1395	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1396	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1397	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1398	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1399	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R1401	1-208-931-81	s	RES, CHIP 68K (1005)
R1402	1-208-931-81	s	RES, CHIP 68K (1005)
R1403	1-208-931-81	s	RES, CHIP 68K (1005)
R1404	1-208-931-81	s	RES, CHIP 68K (1005)
R1405	1-208-931-81	s	RES, CHIP 68K (1005)
R1406	1-208-931-81	s	RES, CHIP 68K (1005)
R1407	1-208-931-81	s	RES, CHIP 68K (1005)
R1408	1-208-931-81	s	RES, CHIP 68K (1005)
R1409	1-208-931-81	s	RES, CHIP 68K (1005)
R1410	1-208-931-81	s	RES, CHIP 68K (1005)
R1411	1-208-931-81	s	RES, CHIP 68K (1005)
R1412	1-208-931-81	s	RES, CHIP 68K (1005)
R1413	1-208-715-11	s	RES, CHIP 22K (1005)
R1414	1-208-715-11	s	RES, CHIP 22K (1005)
R1415	1-208-715-11	s	RES, CHIP 22K (1005)
R1416	1-208-715-11	s	RES, CHIP 22K (1005)
R1417	1-208-927-81	s	RES, CHIP 47K (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1418	1-208-927-81	s	RES, CHIP 47K (1005)
R1419	1-208-927-81	s	RES, CHIP 47K (1005)
R1420	1-208-927-81	s	RES, CHIP 47K (1005)
R1421	1-208-713-11	s	RES, CHIP 18K (1005)
R1422	1-208-713-11	s	RES, CHIP 18K (1005)
R1423	1-208-713-11	s	RES, CHIP 18K (1005)
R1424	1-208-713-11	s	RES, CHIP 18K (1005)
R1425	1-208-947-81	s	RES, CHIP 330K (1005)
R1426	1-208-947-81	s	RES, CHIP 330K (1005)
R1427	1-208-947-81	s	RES, CHIP 330K (1005)
R1428	1-208-947-81	s	RES, CHIP 330K (1005)
R1429	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1430	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1431	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1432	1-208-691-11	s	RES, CHIP 2.2K (1005)
R1500	1-208-927-81	s	RES, CHIP 47K (1005)
R1501	1-208-927-81	s	RES, CHIP 47K (1005)
R1502	1-208-927-81	s	RES, CHIP 47K (1005)
R1503	1-208-927-81	s	RES, CHIP 47K (1005)
R1504	1-208-927-81	s	RES, CHIP 47K (1005)
R1505	1-208-927-81	s	RES, CHIP 47K (1005)
R1506	1-208-927-81	s	RES, CHIP 47K (1005)
R1507	1-208-927-81	s	RES, CHIP 47K (1005)
R1508	1-208-927-81	s	RES, CHIP 47K (1005)
R1509	1-208-927-81	s	RES, CHIP 47K (1005)
R1510	1-208-927-81	s	RES, CHIP 47K (1005)
R1511	1-208-935-81	s	RES, CHIP 100K (1005)
R1512	1-208-935-81	s	RES, CHIP 100K (1005)
R1513	1-208-927-81	s	RES, CHIP 47K (1005)
R1514	1-208-927-81	s	RES, CHIP 47K (1005)
R1515	1-208-935-81	s	RES, CHIP 100K (1005)
R1516	1-208-935-81	s	RES, CHIP 100K (1005)
R1517	1-208-911-81	s	RES, CHIP 10K (1005)
R1518	1-208-911-81	s	RES, CHIP 10K (1005)
R1519	1-208-911-81	s	RES, CHIP 10K (1005)
R1520	1-208-911-81	s	RES, CHIP 10K (1005)
R1521	1-208-703-11	s	RES, CHIP 6.8K (1005)
R1522	1-208-703-11	s	RES, CHIP 6.8K (1005)
R1523	1-208-935-81	s	RES, CHIP 100K (1005)
R1524	1-208-935-81	s	RES, CHIP 100K (1005)
R1525	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1526	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1527	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1528	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1529	1-218-970-11	s	RES, CHIP 27K (1005)
R1530	1-218-970-11	s	RES, CHIP 27K (1005)
R1531	1-218-970-11	s	RES, CHIP 27K (1005)
R1532	1-218-970-11	s	RES, CHIP 27K (1005)
R1533	1-208-927-81	s	RES, CHIP 47K (1005)
R1534	1-208-927-81	s	RES, CHIP 47K (1005)
R1535	1-208-927-81	s	RES, CHIP 47K (1005)
R1536	1-208-931-81	s	RES, CHIP 68K (1005)
R1537	1-218-941-11	s	RES, CHIP 100 (1005)
R1538	1-208-909-81	s	RES, CHIP 8.2K (1005)
R1539	1-208-931-81	s	RES, CHIP 68K (1005)
R1540	1-218-941-11	s	RES, CHIP 100 (1005)
R1541	1-208-927-81	s	RES, CHIP 47K (1005)
R1542	1-208-909-81	s	RES, CHIP 8.2K (1005)
R1543	1-208-909-81	s	RES, CHIP 8.2K (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1544	1-208-909-81	s	RES, CHIP 8.2K (1005)
R1545	1-208-715-11	s	RES, CHIP 22K (1005)
R1546	1-208-927-81	s	RES, CHIP 47K (1005)
R1547	1-208-715-11	s	RES, CHIP 22K (1005)
R1548	1-208-927-81	s	RES, CHIP 47K (1005)
R1549	1-218-958-11	s	RES, CHIP 2.7K (1005)
R1550	1-218-958-11	s	RES, CHIP 2.7K (1005)
R1551	1-208-911-81	s	RES, CHIP 10K (1005)
R1552	1-208-911-81	s	RES, CHIP 10K (1005)
R1553	1-208-927-81	s	RES, CHIP 47K (1005)
R1554	1-208-715-11	s	RES, CHIP 22K (1005)
R1555	1-208-943-81	s	RES, CHIP 220K (1005)
R1556	1-208-927-81	s	RES, CHIP 47K (1005)
R1557	1-208-715-11	s	RES, CHIP 22K (1005)
R1558	1-208-943-81	s	RES, CHIP 220K (1005)
R1559	1-218-958-11	s	RES, CHIP 2.7K (1005)
R1560	1-218-958-11	s	RES, CHIP 2.7K (1005)
R1561	1-208-943-81	s	RES, CHIP 220K (1005)
R1562	1-208-943-81	s	RES, CHIP 220K (1005)
R1563	1-208-909-81	s	RES, CHIP 8.2K (1005)
R1564	1-218-970-11	s	RES, CHIP 27K (1005)
R1565	1-208-911-81	s	RES, CHIP 10K (1005)
R1566	1-208-909-81	s	RES, CHIP 8.2K (1005)
R1567	1-218-970-11	s	RES, CHIP 27K (1005)
R1568	1-208-911-81	s	RES, CHIP 10K (1005)
R1569	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1570	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1571	1-208-911-81	s	RES, CHIP 10K (1005)
R1572	1-208-911-81	s	RES, CHIP 10K (1005)
R1573	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1574	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1575	1-208-943-81	s	RES, CHIP 220K (1005)
R1576	1-208-943-81	s	RES, CHIP 220K (1005)
R1577	1-208-943-81	s	RES, CHIP 220K (1005)
R1578	1-208-943-81	s	RES, CHIP 220K (1005)
R1579	1-208-943-81	s	RES, CHIP 220K (1005)
R1580	1-208-943-81	s	RES, CHIP 220K (1005)
R1581	1-208-943-81	s	RES, CHIP 220K (1005)
R1582	1-208-943-81	s	RES, CHIP 220K (1005)
R1583	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1584	1-208-699-11	s	RES, CHIP 4.7K (1005)
R1600	1-208-911-81	s	RES, CHIP 10K (1005)
R1601	1-208-911-81	s	RES, CHIP 10K (1005)
R1602	1-208-923-81	s	RES, CHIP 33K (1005)
R1603	1-208-923-81	s	RES, CHIP 33K (1005)
R1604	1-208-927-81	s	RES, CHIP 47K (1005)
R1605	1-208-911-81	s	RES, CHIP 10K (1005)
R1606	1-208-911-81	s	RES, CHIP 10K (1005)
R1607	1-208-927-81	s	RES, CHIP 47K (1005)
R1608	1-208-923-81	s	RES, CHIP 33K (1005)
R1609	1-208-923-81	s	RES, CHIP 33K (1005)
R1610	1-208-923-81	s	RES, CHIP 33K (1005)
R1611	1-208-923-81	s	RES, CHIP 33K (1005)
R1612	1-208-931-81	s	RES, CHIP 68K (1005)
R1613	1-208-931-81	s	RES, CHIP 68K (1005)
R1614	1-208-931-81	s	RES, CHIP 68K (1005)
R1615	1-208-931-81	s	RES, CHIP 68K (1005)
R1616	1-208-695-11	s	RES, CHIP 3.3K (1005)
R1617	1-208-927-81	s	RES, CHIP 47K (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1618	1-208-695-11	s	RES, CHIP 3.3K (1005)
R1619	1-208-927-81	s	RES, CHIP 47K (1005)
R1620	1-208-695-11	s	RES, CHIP 3.3K (1005)
R1621	1-208-695-11	s	RES, CHIP 3.3K (1005)
R1622	1-208-935-81	s	RES, CHIP 100K (1005)
R1623	1-208-923-81	s	RES, CHIP 33K (1005)
R1624	1-208-923-81	s	RES, CHIP 33K (1005)
R1625	1-208-935-81	s	RES, CHIP 100K (1005)
R1626	1-208-923-81	s	RES, CHIP 33K (1005)
R1627	1-208-923-81	s	RES, CHIP 33K (1005)
R1628	1-218-974-11	s	RES, CHIP 56K (1005)
R1629	1-208-923-81	s	RES, CHIP 33K (1005)
R1630	1-208-923-81	s	RES, CHIP 33K (1005)
R1631	1-208-711-11	s	RES, CHIP 15K (1005)
R1632	1-208-711-11	s	RES, CHIP 15K (1005)
R1633	1-208-923-81	s	RES, CHIP 33K (1005)
R1634	1-208-923-81	s	RES, CHIP 33K (1005)
R1635	1-208-901-81	s	RES, CHIP 3.9K (1005)
R1636	1-208-901-81	s	RES, CHIP 3.9K (1005)
R1637	1-218-970-11	s	RES, CHIP 27K (1005)
R1638	1-218-970-11	s	RES, CHIP 27K (1005)
R1639	1-208-911-81	s	RES, CHIP 10K (1005)
R1640	1-208-911-81	s	RES, CHIP 10K (1005)
R1641	1-208-715-11	s	RES, CHIP 22K (1005)
R1642	1-208-715-11	s	RES, CHIP 22K (1005)
R1643	1-208-715-11	s	RES, CHIP 22K (1005)
R1644	1-208-715-11	s	RES, CHIP 22K (1005)
R1645	1-208-911-81	s	RES, CHIP 10K (1005)
R1646	1-208-911-81	s	RES, CHIP 10K (1005)
R1647	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1648	1-208-927-81	s	RES, CHIP 47K (1005)
R1649	1-208-911-81	s	RES, CHIP 10K (1005)
R1650	1-208-911-81	s	RES, CHIP 10K (1005)
R1651	1-208-947-81	s	RES, CHIP 330K (1005)
R1652	1-208-911-81	s	RES, CHIP 10K (1005)
R1653	1-208-911-81	s	RES, CHIP 10K (1005)
R1654	1-208-947-81	s	RES, CHIP 330K (1005)
R1655	1-208-939-81	s	RES, CHIP 150K (1005)
R1656	1-208-939-81	s	RES, CHIP 150K (1005)
R1657	1-208-911-81	s	RES, CHIP 10K (1005)
R1658	1-208-911-81	s	RES, CHIP 10K (1005)
R1659	1-208-913-81	s	RES, CHIP 12K (1005)
R1660	1-208-923-81	s	RES, CHIP 33K (1005)
R1661	1-208-683-11	s	RES, CHIP 1.0K (1005)
R1662	1-208-683-11	s	RES, CHIP 1.0K (1005)
R5000	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5003	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5004	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R5006	1-208-911-81	s	RES, CHIP 10K (1005)
R5007	1-208-683-11	s	RES, CHIP 1.0K (1005)
R5008	1-208-635-11	s	RES, CHIP 10 (1005)
R5009	1-208-683-11	s	RES, CHIP 1.0K (1005)
R5010	1-208-683-11	s	RES, CHIP 1.0K (1005)
R5011	1-208-911-81	s	RES, CHIP 10K (1005)
R5012	1-208-911-81	s	RES, CHIP 10K (1005)
R5013	1-208-635-11	s	RES, CHIP 10 (1005)
R5014	1-208-635-11	s	RES, CHIP 10 (1005)
R5015	1-208-855-81	s	RES, CHIP 47 (1005)
R5016	1-208-855-81	s	RES, CHIP 47 (1005)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5023	1-218-990-81	s	CONDUCTOR, CHIP (1005)
RB103	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB104	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB105	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB106	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB107	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB108	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB109	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB110	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB111	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB112	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB113	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB114	1-234-400-21	s	CONDUCTOR, NETWORK (1005X4)
RB115	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB116	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB117	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB118	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB119	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB120	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB121	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB301	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB302	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB303	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB304	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB305	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB306	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB307	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB308	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB309	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB310	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB311	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB312	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB313	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB317	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB318	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB319	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB320	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB321	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB322	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB323	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB324	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB325	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB326	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB328	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB329	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB332	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB333	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB334	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB335	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB336	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB337	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB400	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB500	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB505	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB506	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB507	1-234-379-21	s	RES, NETWORK 22K (1005X4)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB508	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB509	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB510	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB511	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB602	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB603	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB604	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB605	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB607	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB608	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB609	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB610	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB611	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB612	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB613	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB614	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB615	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB616	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB617	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB618	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB619	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB620	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB915	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB916	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB917	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB918	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB919	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB920	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB921	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB922	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB924	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB925	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB928	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB929	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB937	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB938	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB939	1-234-381-11	s	RES, NETWORK 100K (1005X4)
RB940	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB941	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB942	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB943	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB947	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB948	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB949	1-234-379-21	s	RES, NETWORK 22K (1005X4)
RB1000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1002	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1004	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1005	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1006	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1007	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1008	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1009	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1010	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1011	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1012	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1013	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1014	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1015	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1016	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB1017	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RV1200	1-241-265-41	s	RES, ADJ, CERMET 20K
S100	1-692-271-41	s	SWITCH, SLIDE
S101	1-692-271-41	s	SWITCH, SLIDE
S102	1-771-721-21	s	SWITCH, TACTILE
S600	1-692-271-41	s	SWITCH, SLIDE
S601	1-692-271-41	s	SWITCH, SLIDE
S1000	1-692-271-41	s	SWITCH, SLIDE
S1200	1-771-721-21	s	SWITCH, TACTILE
S1201	1-771-721-21	s	SWITCH, TACTILE
TP100	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP402	1-535-877-22	s	CHIP, CHECKER
TP500	1-535-877-22	s	CHIP, CHECKER
TP501	1-535-877-22	s	CHIP, CHECKER
TP502	1-535-877-22	s	CHIP, CHECKER
TP503	1-535-877-22	s	CHIP, CHECKER
TP504	1-535-877-22	s	CHIP, CHECKER
TP505	1-535-877-22	s	CHIP, CHECKER
TP506	1-535-877-22	s	CHIP, CHECKER
TP507	1-535-877-22	s	CHIP, CHECKER
TP508	1-535-877-22	s	CHIP, CHECKER
TP509	1-535-877-22	s	CHIP, CHECKER
TP510	1-535-877-22	s	CHIP, CHECKER
TP511	1-535-877-22	s	CHIP, CHECKER
TP600	1-535-877-22	s	CHIP, CHECKER
TP601	1-535-877-22	s	CHIP, CHECKER
TP602	1-535-877-22	s	CHIP, CHECKER
TP603	1-535-877-22	s	CHIP, CHECKER
TP700	1-535-877-22	s	CHIP, CHECKER
TP701	1-535-877-22	s	CHIP, CHECKER
TP703	1-535-877-22	s	CHIP, CHECKER
TP704	1-535-877-22	s	CHIP, CHECKER
TP705	1-535-877-22	s	CHIP, CHECKER
TP706	1-535-877-22	s	CHIP, CHECKER
TP800	1-535-877-22	s	CHIP, CHECKER
TP801	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1100	1-535-877-22	s	CHIP, CHECKER
TP1101	1-535-877-22	s	CHIP, CHECKER
TP1102	1-535-877-22	s	CHIP, CHECKER
TP1104	1-535-877-22	s	CHIP, CHECKER
TP1105	1-535-877-22	s	CHIP, CHECKER
TP1106	1-535-877-22	s	CHIP, CHECKER
TP1107	1-535-877-22	s	CHIP, CHECKER
TP1108※b	1-535-877-22	s	CHIP, CHECKER
TP1109※b	1-535-877-22	s	CHIP, CHECKER
TP1200	1-535-877-22	s	CHIP, CHECKER
TP1201	1-535-877-22	s	CHIP, CHECKER
TP1202	1-535-877-22	s	CHIP, CHECKER
TP1203	1-535-877-22	s	CHIP, CHECKER
TP1204	1-535-877-22	s	CHIP, CHECKER
TP1205	1-535-877-22	s	CHIP, CHECKER
TP1206	1-535-877-22	s	CHIP, CHECKER

(SS-102 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP1207	1-535-877-22	s	CHIP, CHECKER
TP1300	1-535-877-22	s	CHIP, CHECKER
TP1301	1-535-877-22	s	CHIP, CHECKER
TP1302	1-535-877-22	s	CHIP, CHECKER
TP1303	1-535-877-22	s	CHIP, CHECKER
TP1304	1-535-877-22	s	CHIP, CHECKER
TP1305	1-535-877-22	s	CHIP, CHECKER
TP1306	1-535-877-22	s	CHIP, CHECKER
TP1307	1-535-877-22	s	CHIP, CHECKER
TP1308	1-535-877-22	s	CHIP, CHECKER
TP1309	1-535-877-22	s	CHIP, CHECKER
TP1500	1-535-877-22	s	CHIP, CHECKER
TP1501	1-535-877-22	s	CHIP, CHECKER
TP1502	1-535-877-22	s	CHIP, CHECKER
TP1503	1-535-877-22	s	CHIP, CHECKER
TP1600	1-535-877-22	s	CHIP, CHECKER
TP1601	1-535-877-22	s	CHIP, CHECKER
TP1602	1-535-877-22	s	CHIP, CHECKER
TP1603	1-535-877-22	s	CHIP, CHECKER
TP1604	1-535-877-22	s	CHIP, CHECKER
TP1605	1-535-877-22	s	CHIP, CHECKER
TP1606	1-535-877-22	s	CHIP, CHECKER
TP1607	1-535-877-22	s	CHIP, CHECKER
X101	1-814-011-11	s	OSCILLATOR,CRYSTAL(33.1776MHZ)
X401	1-795-983-11	s	OSCILLATOR, CRYSTAL
X600	1-814-011-11	s	OSCILLATOR,CRYSTAL(33.1776MHZ)
X700	1-813-649-11	s	OSCILLATOR, CRYSTAL (20MHZ)
X1000	1-813-873-11	s	OSCILLATOR, CRYSTAL (40MHZ)

SWC-46 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-708-895-01	s	CAP
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
CN1	1-695-209-21	s	PIN, CONNECTOR (PC BOARD) 15P
CN2	1-750-635-21	o	PIN, CONNECTOR (PC BOARD) 5P
D103	8-719-070-74	s	DIODE SLR-342MCT32
D104	8-719-070-75	s	DIODE SLR-342DCT32
D105	8-719-070-73	s	DIODE SLR-342VCT32
D106	8-719-070-73	s	DIODE SLR-342VCT32
D107	8-719-070-75	s	DIODE SLR-342DCT32
Q100	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q101	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q102	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q103	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q104	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q105	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q106	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q107	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q108	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q109	8-729-929-09	s	TRANSISTOR DTC123JE-TL
R100	1-208-911-81	s	RES, CHIP 10K (1005)
R101	1-208-871-81	s	RES, CHIP 220 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-871-81	s	RES, CHIP 220 (1005)
R105	1-208-871-81	s	RES, CHIP 220 (1005)
R106	1-208-871-81	s	RES, CHIP 220 (1005)
R107	1-208-871-81	s	RES, CHIP 220 (1005)
R108	1-208-871-81	s	RES, CHIP 220 (1005)
R109	1-208-871-81	s	RES, CHIP 220 (1005)
R110	1-208-871-81	s	RES, CHIP 220 (1005)
R111	1-208-871-81	s	RES, CHIP 220 (1005)
R112	1-208-911-81	s	RES, CHIP 10K (1005)
R113	1-208-911-81	s	RES, CHIP 10K (1005)
R114	1-208-871-81	s	RES, CHIP 220 (1005)
S100	1-762-033-11	s	SWITCH, TACTILE (ILLUMINATED)
S101	1-762-042-11	s	SWITCH, TACTILE (ILLUMINATED)
S102	1-762-042-11	s	SWITCH, TACTILE (ILLUMINATED)
S103	1-762-042-11	s	SWITCH, TACTILE (ILLUMINATED)
S104	1-762-042-11	s	SWITCH, TACTILE (ILLUMINATED)

TC-104A BOARD

TC-104A board is changed to TC-112A board. When TC-104A board is not available, use TC-112A board.

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8346-867-A	s	MOUNTED CIRCUIT BOARD, TC-104A
1pc	3-682-047-01	o	HOLDER(A),PC BOARD
1pc	4-641-552-01	o	SADDLE, LOCK EDGE
1pc	7-682-948-01	s	SCREW +PSW 3X8
C100	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C101	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C103	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C104	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C105	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C106	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C107	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C108	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C109	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C110	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C111	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C112	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C114	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C115	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C117	1-115-459-11	s	CAPACITOR,ELECT 47MF/6.3V(BP)
C200	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C201	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C202	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C203	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C204	1-109-897-11	s	CAPACITOR,CHIP CERAMIC 0.015MF
C205	1-109-898-11	s	CAPACITOR,CHIP CERAMIC 18000PF
C206	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C211	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C300	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C301	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C302	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C303	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C304	1-109-897-11	s	CAPACITOR,CHIP CERAMIC 0.015MF
C305	1-109-898-11	s	CAPACITOR,CHIP CERAMIC 18000PF
C307	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C308	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C400	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C401	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C402	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C403	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C404	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C405	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C406	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C407	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C408	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C411	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C412	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C413	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C414	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C902	1-117-136-11	s	CAPACITOR ELECT 10MF/6.3V(BP)
CN100	1-573-806-91	s	PIN, CONNECTOR 6P
CN200	1-778-552-11	o	PIN, CONNECTOR 30P
CN300	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN500	1-573-290-21	s	PIN,CONNECTOR (4P)(SMD)(1.5MM)
CN600	1-573-768-21	s	PIN, CONNECTOR(5P)(SMD)(1.5MM)

(TC-104A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D100	8-719-820-41	s	DIODE 1SS302
D400	8-719-975-40	s	DIODE RB411D (RECTI)
D401	8-719-975-40	s	DIODE RB411D (RECTI)
E100	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
E400	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
IC100	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC101	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC102	8-759-710-28	s	IC NJM4565M-A
IC103	8-759-422-21	s	IC NJM4580VTE2
IC104	8-759-338-95	s	IC NJM2903V (TE2)
IC105	8-759-392-01	s	IC TC7SH86FU (TE85R)
IC200	8-759-478-92	s	IC TC7SET04FU(TE85R)
IC300	8-759-478-92	s	IC TC7SET04FU(TE85R)
IC400	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC401	8-759-642-22	s	IC UPC29M05T-E2
IC403	6-704-155-01	s	IC UCC384DPTR-5
IC900	8-759-523-79	s	IC TC74VHC02FT
L200	1-414-400-11	s	INDUCTOR, 22UH
L300	1-414-400-11	s	INDUCTOR, 22UH
L400	1-416-919-11	s	COIL, CHOKE 150UH
L401	1-416-919-11	s	COIL, CHOKE 150UH
LV200	1-414-007-11	s	COIL, VARIABLE
PS400	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS401	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS402	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q100	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-928-19	s	TRANSISTOR 2SA1774R
Q200	8-729-928-27	s	TRANSISTOR DTA144EE
Q203	8-729-043-74	s	TRANSISTOR SI4435DY-T1-REVA
Q205	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q206	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q300	8-729-928-27	s	TRANSISTOR DTA144EE
Q302	8-729-043-74	s	TRANSISTOR SI4435DY-T1-REVA
Q303	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q304	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q401	8-729-928-27	s	TRANSISTOR DTA144EE
Q402	8-729-048-50	s	TRANSISTOR 2SK3018-T106
Q900	8-729-928-27	s	TRANSISTOR DTA144EE
Q901	8-729-928-27	s	TRANSISTOR DTA144EE
R100	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R101	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/10W(1608)
R102	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R103	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R104	1-218-845-11	s	RESISTOR,CHIP 820 1/10W (1608)
R105	1-211-969-11	s	RESISTOR,CHIP 10 1/10W (1608)
R106	1-218-891-11	s	RESISTOR,CHIP 68K 1/10W (1608)
R107	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R108	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R109	1-218-831-11	s	RESISTOR, CHIP 220 1/10W(1608)
R110	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/10W(1608)
R111	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R112	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R113	1-218-875-11	s	RESISTOR,CHIP 15K 1/10W (1608)
R114	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)

(TC-104A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R115	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/10W(1608)
R116	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/10W(1608)
R117	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/10W(1608)
R118	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R119	1-218-883-11	s	RESISTOR,CHIP 33K 1/10W (1608)
R120	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/10W(1608)
R121	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R122	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R123	1-218-847-11	s	RESISTOR, CHIP 1K 1/10W (1608)
R124	1-218-907-11	s	RESISTOR,CHIP 330K 1/10W(1608)
R125	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R126	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/10W(1608)
R127	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R200	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R202	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R203	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R205	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R206	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R207	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R208	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R209	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R210	1-218-236-91	s	RESISTOR,CHIP 1 1/4W
R212	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R300	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R301	1-216-857-11	s	RESISTOR,CHIP 1M 1/10W(1608)
R302	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R303	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R304	1-218-879-11	s	RESISTOR,CHIP 22K 1/10W (1608)
R305	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R306	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R307	1-218-236-91	s	RESISTOR,CHIP 1 1/4W
R401	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R402	1-218-873-11	s	RESISTOR,CHIP 12K 1/10W (1608)
R403	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R900	1-218-871-11	s	RESISTOR,CHIP 10K 1/10W (1608)
R901	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
R902	1-218-887-11	s	RESISTOR,CHIP 47K 1/10W (1608)
RB401	1-233-665-11	s	NETWORK, RES (8 GANG) 47K
T200	1-424-511-11	s	TRANSFORMER,FE
T300	1-424-511-11	s	TRANSFORMER,FE
TP100	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP101	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP102	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP200	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP201	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP301	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP400	1-535-877-22	s	CHIP,CHECKER (TEST POINT)
TP401	1-535-877-22	s	CHIP,CHECKER (TEST POINT)

TC-112A BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-149-A	s	MOUNTED CIRCUIT BOARD, TC-112A
1pc	3-682-047-01	o	HOLDER (A), PC BOARD
1pc	4-641-552-01	o	SADDLE, LOCK EDGE
1pc	7-682-948-01	s	SCREW +PSW 3X8
C100	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C101	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C102	1-115-459-21	s	CAP, ELECT 47MF
C103	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C104	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C105	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C106	1-162-967-91	s	CAP, CERAMIC 3300PF B 1608
C107	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C108	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C109	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C110	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C111	1-115-459-21	s	CAP, ELECT 47MF
C112	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C113	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C114	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C115	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C117	1-115-459-21	s	CAP, ELECT 47MF
C200	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C201	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C202	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C203	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C204	1-109-897-91	s	CAP, CERAMIC 15000PF CH (5750)
C205	1-109-898-91	s	CAP, CERAMIC 18000PF CH (5750)
C206	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C211	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C300	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C301	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C302	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C303	1-126-400-21	s	CAP, CHIP ELECT 22MF(6.3X5.7)
C304	1-109-897-91	s	CAP, CERAMIC 15000PF CH (5750)
C305	1-109-898-91	s	CAP, CERAMIC 18000PF CH (5750)
C307	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C308	1-164-227-91	s	CAP,CERAMIC 22000PF B 1608
C400	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C401	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C402	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C403	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C404	1-126-394-21	s	CAP, CHIP ELECT 10MF (4X5.7)
C405	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C406	1-162-970-91	s	CAP, CERAMIC 0.01MF B 1608
C411	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C412	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C413	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C414	1-107-826-91	s	CAP, CHIP CERAMIC 0.1MF B
C902	1-127-692-91	s	CAP, CHIP CERAMIC 10MF B 3225
CN100	1-573-806-21	s	PIN, CONNECTOR (1.5MM) (SMD)6P
CN200	1-778-552-21	o	PIN, CONNECTOR 30P
CN300	1-691-550-21	s	PIN, CONNECTOR (1.5MM)(SMD) 3P
CN500	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD)4P
CN600	1-573-768-21	s	PIN, CONNECTOR (1.5MM) (SMD)5P
D100	8-719-820-42	s	DIODE 1SS302-TE85L
D400	8-719-975-41	s	DIODE RB411D-T146
D401	8-719-975-41	s	DIODE RB411D-T146
E100	1-535-877-22	s	CHIP, CHECKER

(TC-112A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
E400	1-535-877-22	s	CHIP, CHECKER
IC100	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC101	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC102	8-759-276-87	s	IC NJM4565M-A(TE2)
IC103	8-759-422-21	s	IC NJM4580V(TE2)
IC104	8-759-338-95	s	IC NJM2903V(TE2)
IC105	6-706-491-01	s	IC TC7SH86FU(T5RSOYJF)
IC200	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC300	6-706-476-01	s	IC TC7SET04FU(T5RSOJF)
IC400	6-707-890-01	s	IC TC74VHCT244AFT(EKJ)
IC401	6-709-015-01	s	IC UPC2905BT-E2-AZ
IC402	8-759-539-89	s	IC LM2990SX-5.0
IC900	6-707-859-01	s	IC TC74VHC02FT(EKJ)
L200	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L300	1-414-400-41	s	INDUCTOR (SMD) 22.0UH
L400	1-416-919-21	s	COIL, CHOKE 150UH
L401	1-416-919-21	s	COIL, CHOKE 150UH
LV200	1-457-467-11	s	COIL, VARIABLE
PS400	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
PS401	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
PS402	⚠ 1-533-282-21	s	LINK, IC (2A/72V)
Q100	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q101	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q102	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q200	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q203	6-551-258-01	s	TRANSISTOR SI4435BDY-T1
Q205	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q206	8-729-141-76	s	TRANSISTOR 2SD596T1-DV345
Q300	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q302	6-551-258-01	s	TRANSISTOR SI4435BDY-T1
Q303	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q304	8-729-209-12	s	TRANSISTOR 2SC4213B-TE85L
Q401	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q900	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q901	8-729-928-28	s	TRANSISTOR DTA144EE-TL
R100	1-218-855-91	s	RES, CHIP 2.2K (1608)
R101	1-218-855-91	s	RES, CHIP 2.2K (1608)
R102	1-218-871-91	s	RES, CHIP 10K (1608)
R103	1-218-907-91	s	RES, CHIP 330K (1608)
R104	1-218-845-91	s	RES, CHIP 820 (1608)
R105	1-211-969-91	s	RES, CHIP 10 (1608)
R106	1-218-891-91	s	RES, CHIP 68K (1608)
R107	1-218-871-91	s	RES, CHIP 10K (1608)
R108	1-218-883-91	s	RES, CHIP 33K (1608)
R109	1-218-831-91	s	RES, CHIP 220 (1608)
R110	1-218-857-91	s	RES, CHIP 2.7K (1608)
R111	1-218-907-91	s	RES, CHIP 330K (1608)
R112	1-218-851-91	s	RES, CHIP 1.5K (1608)
R113	1-218-875-91	s	RES, CHIP 15K (1608)
R114	1-218-871-91	s	RES, CHIP 10K (1608)
R115	1-218-867-91	s	RES, CHIP 6.8K (1608)
R116	1-218-851-91	s	RES, CHIP 1.5K (1608)
R117	1-218-853-91	s	RES, CHIP 1.8K (1608)
R118	1-218-883-91	s	RES, CHIP 33K (1608)
R119	1-218-883-91	s	RES, CHIP 33K (1608)
R120	1-218-859-91	s	RES, CHIP 3.3K (1608)

(TC-112A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R121	1-218-879-91	s	RES, CHIP 22K (1608)
R122	1-218-871-91	s	RES, CHIP 10K (1608)
R123	1-218-847-91	s	RES, CHIP 1.0K (1608)
R124	1-218-907-91	s	RES, CHIP 330K (1608)
R125	1-218-863-91	s	RES, CHIP 4.7K (1608)
R126	1-218-863-91	s	RES, CHIP 4.7K (1608)
R127	1-218-871-91	s	RES, CHIP 10K (1608)
R200	1-218-887-91	s	RES, CHIP 47K (1608)
R202	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R203	1-216-857-91	s	RES, CHIP 1.0M (1608)
R205	1-218-887-91	s	RES, CHIP 47K (1608)
R206	1-218-879-91	s	RES, CHIP 22K (1608)
R207	1-218-879-91	s	RES, CHIP 22K (1608)
R208	1-216-789-91	s	RES, CHIP 2.2 (1608)
R209	1-216-789-91	s	RES, CHIP 2.2 (1608)
R210	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R212	1-216-864-91	s	CONDUCTOR, CHIP (1608)
R300	1-218-887-91	s	RES, CHIP 47K (1608)
R301	1-216-857-91	s	RES, CHIP 1.0M (1608)
R302	1-218-887-91	s	RES, CHIP 47K (1608)
R303	1-218-879-91	s	RES, CHIP 22K (1608)
R304	1-218-879-91	s	RES, CHIP 22K (1608)
R305	1-216-789-91	s	RES, CHIP 2.2 (1608)
R306	1-216-789-91	s	RES, CHIP 2.2 (1608)
R307	1-218-236-91	s	RES,SQUARE TYPE CHIP 1.0(3225)
R401	1-218-887-91	s	RES, CHIP 47K (1608)
R900	1-218-871-91	s	RES, CHIP 10K (1608)
R901	1-218-887-91	s	RES, CHIP 47K (1608)
R902	1-218-887-91	s	RES, CHIP 47K (1608)
RB401	1-234-882-21	s	RES, CHIP NETWORK 47KX8 (3816)
T200	1-424-511-11	s	TRANSFORMER, FE
T300	1-424-511-11	s	TRANSFORMER, FE
TP100	1-535-877-22	s	CHIP, CHECKER
TP101	1-535-877-22	s	CHIP, CHECKER
TP102	1-535-877-22	s	CHIP, CHECKER
TP200	1-535-877-22	s	CHIP, CHECKER
TP201	1-535-877-22	s	CHIP, CHECKER
TP301	1-535-877-22	s	CHIP, CHECKER
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER

TR-119 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

This board is out of spare parts.
When replacement is required, replace it with the assembly (including mounted circuit board) below.

	A-8325-409-C	s	REGULATOR ASSY (RP), S TENSION

TR-120 BOARD

Ref. No. or Q'ty	Part No.	SP	Description

This board is out of spare parts.
When replacement is required, replace it with the assembly (including mounted circuit board) below.

	A-8325-410-C	s	T TEN ASSY (RP)

1-4. Supplied Accessories

SUPPLIED ACCESSORIES (SRW-5800)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ 3-286-476-03	s	MANUAL, INSTALLATION
1pc	⚠ 3-286-491-03	s	MANUAL (CD-ROM), OPERATION

SUPPLIED ACCESSORIES (HKSR-5803SQ)

Ref. No. or Q'ty	Part No.	SP	Description
8pcs	7-621-759-45	s	+PSW, 2.6X6

SUPPLIED ACCESSORIES (HKSR-5803HQ)

Ref. No. or Q'ty	Part No.	SP	Description
8pcs	7-621-759-45	s	+PSW, 2.6X6

1-5. Optional Fixtures

Part No.	SP	Description
J-6080-029-A	s	SMALL DENTAL MIRROR (Round type ø12)
J-6251-090-A	o	TORQUE SCREWDRIVER'S HEXAGONAL BIT (d=2.5 mm, l=120 mm)
J-6252-510-A	o	TORQUE SCREWDRIVER (6 kg·cm) (0.6 N·m) [JB-5251]
J-6252-520-A	o	TORQUE SCREWDRIVER (12 kg·cm) (1.2 N·m) [JB-5252]
J-6252-530-A	o	TORQUE SCREWDRIVER (26 kg·cm) (2.6 N·m) [JB-5253]
J-6322-610-A	o	TAPE GUIDE ADJUSTMENT DRIVER [MW-261]
J-6323-420-A	o	TORQUE SCREWDRIVER'S BIT (+2 mm, l=75 mm)
J-6323-430-A	o	TORQUE SCREWDRIVER'S BIT (+3 mm, l=90 mm)
J-7120-140-A	o	PLD DOUNLOAD JIG
J-6605-770-A	s	SETTING TOOL, POSITIONING PIN
A-8346-141-B	s	EXTENSION BOARD, EX-873
A-8347-714-A	s	EXTENSION BOARD, EX-949
1-677-293-21	s	EXTENSION FLEXIBLE BOARD (FL-276)
3-184-527-01	s	CLEANING CLOTH (15 cm x 15 cm)
7-432-114-11	s	LOCKING COMPOUND (200 g)
7-640-015-58	s	OIL, SONY BC (LX-126) 1KG
7-651-000-10	s	SONY GREASE SGL-601 (50 g)
7-700-736-05	s	L-SHAPED HEXAGONAL WRENCH (d=1.5 mm)
7-700-736-06	s	L-SHAPED HEXAGONAL WRENCH (d=0.89 mm)
7-700-766-04	s	HEXAGONAL WRENCH DRIVER (d=2.5 mm)
8-960-073-01	o	ALIGNMENT TAPE, ZR5-1 (for 525/60 Digital Betacam system)
8-960-073-51	o	ALIGNMENT TAPE, ZR5-1P (for 625/50 Digital Betacam system)
8-960-076-01	s	ALIGNMENT TAPE, HR5-1A (for HDCAM system)
8-960-076-11	s	ALIGNMENT TAPE, HR2-1A (for HDCAM system)
8-960-076-31	s	ALIGNMENT TAPE, HR5-1B (for HDCAM SR system)
8-960-076-41	s	ALIGNMENT TAPE, HR2-1B (for HDCAM SR system)
9-919-573-01	s	CLEANING LIQUID

Section 2
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-06) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD−ROM版 (ソニー部品番号：9−968−546−06)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD−ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE — **Page or ID No.**

02DZ20-TPH3 ..... DC008-04
02DZ4.3-TPH3 ..... DC008-04

1SS300-TE85L DC001-02
1SS301-TE85L DC001-03
1SS302-TE85L DC001-01
1SS372-TE85L DC001-01

D10SC6M DM002-01
D1FS4A-TA DC007-01
D2FL20U-TA DC007-01
D2FS6-TA DC007-01
DA204UT106 ..... DC001-01

M1FS4-4063 ..... DC008-02
MBRS340T3 ..... DC013-01

RB051L-40TE25 ..... DC007-01
RB060L-40TE25 ..... DC007-01
RB160L-40TE25 ..... DC007-01
RB161L-40TE25 ..... DC008-02
RB491D-T146 ..... DC001-06
RB521S-30-TE61 ..... DC008-02
RD18SB-T1 ..... DC008-04
RD22SB-T1 ..... DC008-04
RD27SB-T1 ..... DC008-04
RD3.3SB-T1 ..... DC008-04
RD30SB-T1 ..... DC008-04

LED — **Page or ID No.**

CL-150YG-CD-T LC001-01
CL-191HR-CD-T LC004-02
CL-191YG-CD-T LC004-01
CL-196HR-CD-T LC001-01
CL-196YG-CD-T LC001-01

SLR-342DC3F LR014-02
SLR-342MC3F LR014-02
SLR-342MCT32 ..... LR014-02
SLR-342VC3F LR014-02
SLR-342VCT32 ..... LR014-02

TLYE263AP(NP) LR008-01

TRANSISTOR — **Page or ID No.**

2SA1162-YG-TE85L TC001-01
2SA1213Y-TE12L TC002-01
2SA1413-L TR031-02
2SA1610-T1Y34 ..... TC001-01
2SA1611T1-M5M6 ..... TC001-01
2SB1114-T1ZL TC002-01
2SB624-T1BV5 ..... TC001-01
2SC2712-YG-TE85L TC001-02
2SC3632-K TR031-01
2SC4176T1B33B34B35 ..... TC001-02
2SC4213-AB-TE85L TC001-02
2SC4213B-TE85L TC001-10
2SK711-BL(TE85L) TC001-05
2SK711-BL/V-TE85L TC001-05

DTA123JE-TL TC001-04
DTA144EE-TL TC001-04
DTC123JE-TL TC001-03

Index

TRANSISTOR	Page or ID No.
DTC144EE-TL	TC001-03
DTC144EUA-T106	TC001-03
DTC363EKT146	TC001-03
HAT2164H-EL-E	TC017-01
NDS355AN	TC001-07
NDS356AP	TC001-20
SI4416DY-T1	TC012-06
SI4420DY-T1	TC012-06

IC	Page or ID No.
74VHCT541AMTCX	MC74HC541N
AK6420AM(E2)	AK6420AM-E2
AK6420AM	AK6420AM-E2
AK6420AM-E2	AK6420AM-E2
AK6480AM-E2	AK6480AM-E2
AK9813BF-E2	MB88E346PFV-G-BND-ER
AM26LV32CNSR	AM26LS32PC
BA05FP-E2	L78M05T-FA
CDC516DGGR	CDC516DGGR
CXA1450M-TH	CXA1450M
CXA1451M-TH	CXA1451M
CXA1777N-T4	CXA1777N
CXA3053R	CXA3053R
CXA3269R	CXA3269R
CXA3513R	CXA3513R
CXD1095BR	CXD1095AR
CXD2302Q-T4	CXD2302Q
CXD2315Q-T4	CXD2306Q
CXD8807BR	CXD8807AR
CXD9017BR	CXD9017BR
CXD9079AGB-P	CXD9079GB
CXD9080AGB-P	CXD9080GB
CXD9107R	CXD9107R
CXD9130GB-P	CXD9130GB
CXD9137R	CXD9137R
CXD9176R	CXD9176R
CXP87860-064Q	CXP87860-064Q
DS3691MX	DS3691M
DS90CR287MTDX	DS90CR287MTDX
DS90CR288AMTDX	DS90CR288AMTDX
DS90CR483VJDX	DS90CR483VJDX
EPC2LC20N-TP	EPC2LC20
EPF10K100EFC484-2N	EPFFC484AA
HA17431UA-TL	NJM431U
HD6417709SF100BV	HD6417709SF133BV
HD6417709SF133BV	HD6417709SF133BV
HD6417727F160V	HD6417727F160V

IC	Page or ID No.
HD64413ASFV	HD64413ASFV
HD64F7145F50	HD64F7145F50
IDTQS3257Q-TL	SN74CBTLV3257PWR
LA7205M-TLM-E	LA7205M
LM2940CSX-5.0	LM2940CS
LM2990SX-5.0	UA7905UC
LM317MDTX	LM317MDTX
LM45BIM3X	LM45BIM3X
LM45BIM3X/NOPB	LM45BIM3X
LP3964EMPX-ADJ	LP3964EMPX-ADJ
LTC1458CG-E2	LTC1458CG-E2
M62371GP-600D	M62371GP-600D
MB3759PF-ER	TL494CN
MB3771PF-ER	MB3771DIP
MB90096PF-G-139-BND(ER)	MB90096PF-G-139-BND-ER
MB90096PF-G-139-BND-ER	MB90096PF-G-139-BND-ER
ML60851DTB	ML60851BTB
NJM2119M(TE2)	RC4558
NJM2903V(TE2)	UA393DC
NJM2904V(TE2)	RC4558
NJM4556AM-A-TE2	RC4558
NJM4558V-TE2	RC4558
NJM4580E(TE2)	RC4558
NJM4580V(TE2)	RC4558
NJM7812FA	NJM78M05FA
NJM78M09DL1A(TE1)	NJM78M12DLA_TE1
NJM78M12DL1A-TE1	NJM78M12DLA_TE1
NJM79M05DL1A(TE2)	NJM79M12DLA_TE1
QS3257Q	SN74CBTLV3257PWR
QS3257Q-T	SN74CBTLV3257PWR
S-80821CNUA-B8GT2G	S-80821CNUA-B8GT2G
S-80825CLUA-B6KT2G	S-80845CLUA-B66T2G
S-80827CNNB-B8MT2G	S-80840CNNB-B8Z-T2
S-80828CLUA-B6NT2G	S-80845CLUA-B66T2G
S-80830CNUA-B8PT2G	S-80821CNUA-B8GT2G
S-80830CNUA-B8PT2G	S-80821CNUA-B8GT2G
S-80840CNUA-B8ZT2G	S-80821CNUA-B8GT2G
S-80840CNUA-B8ZT2G	S-80821CNUA-B8GT2G
S-80845CLUA-B66T2G	S-80845CLUA-B66T2G
S-80845CNUA-B86T2G	S-80821CNUA-B8GT2G
S-80845CNUA-B86T2G	S-80821CNUA-B8GT2G
SN65LVDS1DBVR	SN65LVDS1DBVR
SN65LVDS2DR	SN65LVDS2DR
SN65LVDS31DR	DS26C31CM
SN65LVDS32DR	DS26C32ACN
SN65LVDT2DBVR	SN65LVDT2DBVR
SN74CBTLV1G125DCKR	SN74CBT1G125DCKR
SN74CBTLV3257PWR	SN74CBTLV3257PWR
SN74LV125APWR	MC74HC125N
SN74LV245APWR	TC74HC245P
SN74LV541APWR	MC74HC541N
SN74LVC00APWR	TC74HC00P
SN74LVC04APWR	TC74HC04P
SN74LVC07APWR	TC74HC07AF

IC	Page or ID No.
SN74LVC08APWR	TC74HC08P
SN74LVC125APWR-12	MC74HC125N
SN74LVC14APWR	TC74HC14P
SN74LVC244APWR	TC74HC244P
SN74LVC245APWR	TC74HC245P
SN74LVC257APWR	TC74HC257P
SN74LVC32APWR	SN7432N
SN74LVC541APWR	SN74LS541N
SN74LVC574APWR	TC74HC574P
SN74LVC74APWR-12	TC74HC74P
SN74LVC821APWR	V74ACT821
SN74LVCC4245APWR	74LVX4245QSCX
SN74LVCH16374ADGGR	SN74ABT16374DL
SN74LVCH245APWR	TC74HC245P
SN75207BNSR	SN75207BN
SN75C1168NSR	SN75C1168NS
ST16C550CQ48	TL16C550CPT
TA7267BP	TA7267P
TC74HC4051AFT(EL)	MC74HC4051N
TC74HC4052AFT(EL)	MC74HC4052N
TC74HC4053AFT(EL)	MC74HC4053F
TC74LCX16374AFT(EL)	SN74ABT16374DL
TC74VHC00FT(EL)	TC74HC00P
TC74VHC02FT(EL)	TC74HC02P
TC74VHC123AFT(EL)	TC74HC123P
TC74VHC139FT(EL)	TC74HC139P
TC74VHC14FT(EL)	TC74HC14P
TC74VHC221AFT(EL)	TC74HC221P
TC74VHC541FT(EL)	MC74HC541N
TC74VHC74FT(EL)	TC74HC74P
TC74VHCT00AFT(EL)	TC74HC00P
TC74VHCT244AFT(EL)	TC74HC244P
TC74VHCT32AFT	TC74HC32P
TC7S08FU(TE85R)	TC7S08F
TC7SZ04FU(TE85R)	TC7S04F
TC7SZ08FU(TE85R)	TC7S08F
TC7SZ125FU(TE85R)	NC7SZ125P5
TC7SZ126FU(TE85R)	NC7SZ126P5
TC7W53FU(TE12R)	TC4W53FU
TC7WH14FK(TE85R)	TC7W14FU
TK71533ASCL	TK71533ASCL
TL062CPWR-12	RC4558
TL082CDR	RC4558
TL082CPWR	RC4558
TL16C550CPT	TL16C550CPT
TL431CPK-E2	NJM431U
TLC272CPWR-12	RC4558
TLC2934IPWR	TLC2934IPWR
TLV2221CDBV	TA75S01F
TLV2231CDBVR	TA75S01F
TPS2211IDBR	TPS2211IDBR
TPS54610PWPR	TPS54610PWPR
TPS7101QDR	TPS7101QDR
TPS77601PWPR	TPS77601PWPR
UCC384DPTR-5	UCC384DPTR-5
UPC2918T-E1	L78M05T-FA
UPC2925T-E1	L78M05T-FA
UPC2933T-E2	UPC2933T
UPC29M05T-E2	TA78M09F
UPC29M33T-E1	L78M05T-FA
UPC358G2-E2	RC4558
UPC4572G2-E2	RC4558
UPD4702G-E2	UPD4702G
UPD784046GC-155-3B9-A	UPD78F4046GC-3B9

Section 3
Block Diagrams

Index

Board name		Page
AE-31H	SUFFIX: -22	3-6
	SUFFIX: -25	3-7
APR-81		3-8
APR-91		3-13
CCM-15		3-27
CL-29		3-26
CP-393		3-18
CP-397		3-21
CP-398		3-21
CP-399		3-21
CP-405		3-22
CUE-13		3-25
DIO-86		3-49, 3-50
DLP-27 (HKSR-5803HQ)		⁎1
DR-508		3-26
DT-47		3-28
DT-48		3-29
DVP-43 (HKSR-5802)		3-30
EQ-102		3-35
EQ-109		3-42
FC-91 (HKSR-5001)		⁎2
FC-111 (HKSR-5001)		⁎2
FL-350		3-5
FP-155		3-49
FP-163		3-50
HIF-46	SUFFIX: -11	3-51
	SUFFIX: -12	3-51 (a)
HIF-56		3-57
HN-268		3-26
HP-135		3-49, 3-50
HPR-22		3-63
HPR-35		3-66
IF-1071 (HKSR-5804)		3-71
KY-526G		3-18
KY-527		3-18
LED-455		3-49, 3-50
LP-81		3-26
MB-1101		3-77
MY-115 (HKSR-5804)		3-69

Board name	Page
Overall	3-2
PC-70	3-26
PTC-99	3-26
PTC-102	3-27
SE-606A	3-49, 3-50
SQ-20 (HKSR-5803SQ)	⁎1
SS-102	3-74
SWC-46	3-49, 3-50
TC-104A	3-6, 3-7
TC-112A	3-6, 3-7
TR-119	3-27
TR-120	3-27
TX-96 (HKSR-5001)	⁎1
TX-127 (HKSR-5001)	⁎1

⁎1: The block diagram of this board is not described in this manual.
⁎2: The block diagram of this board is not described in this manual. Refer to SRW-5000/5500 Maintenance Manual.

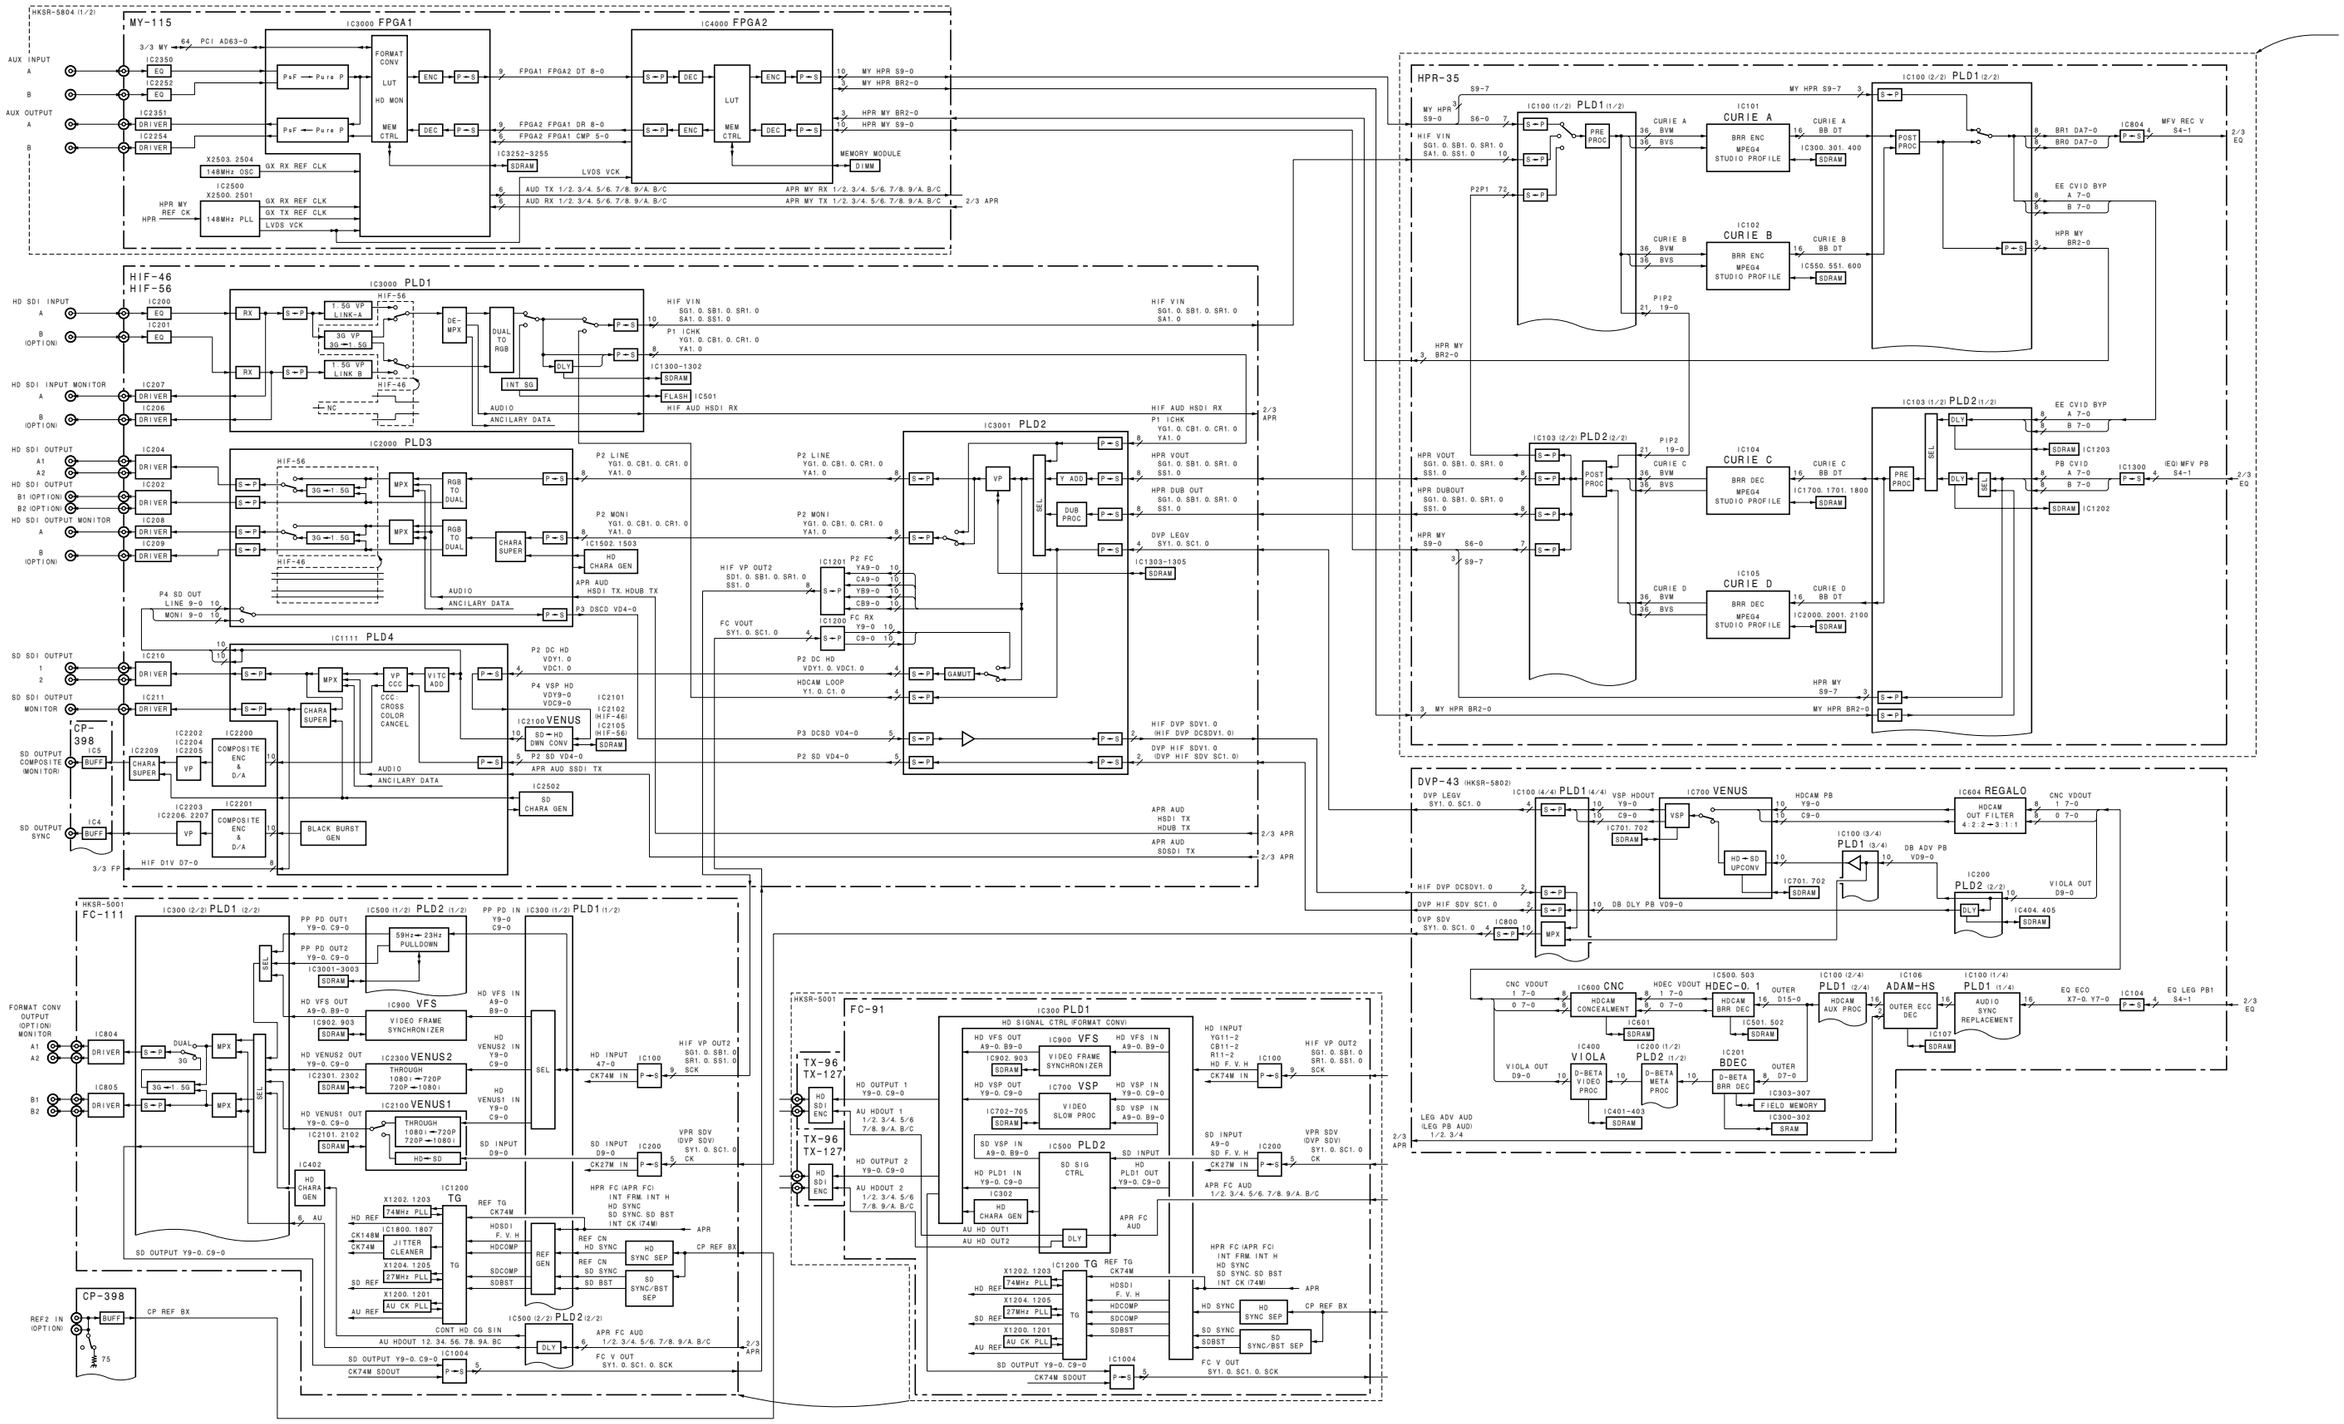
HKSR-5804 (1/2)
MY-115
IC3000 FPGA1
IC4000 FPGA2
AUX INPUT A
B
AUX OUTPUT A
B
IC2350 EQ
IC2252 EQ
IC2351 DRIVER
IC2254 DRIVER
FORMAT CONV
LUT
HD MON
MEM CTRL
ENC
DEC
P→S
S→P
PsF → Prg
X2503. 2504 148MHz OSC
IC2500 X2500. 2501 148MHz PLL
HPR MY REF CK
HPR
GX RX REF CLK
GX TX REF CLK
LVDS VCK
IC3252-3255 SDRAM
MEMORY MODULE DIMM
FPGA1 FPGA2 DT 8-0
FPGA2 FPGA1 DR 8-0
FPGA2 FPGA1 CMP 5-0
AUD TX 1/2. 3/4. 5/6. 7/8. 9/A. B/C
AUD RX 1/2. 3/4. 5/6. 7/8. 9/A. B/C
MY HPR S9-0
MY HPR BR2-0
HPR MY BR2-0
HPR MY S9-0
APR MY RX 1/2. 3/4. 5/6. 7/8. 9/A. B/C
APR MY TX 1/2. 3/4. 5/6. 7/8. 9/A. B/C
2/3 APR
HPR-35
IC100 (1/2) PLD1 (1/2)
IC100 (2/2) PLD1 (2/2)
PRE PROC
POST PROC
HIF VIN SG1. 0. SB1. 0. SR1. 0 SA1. 0. SS1. 0
P2P1 72
PIP2 19-0
IC101 CURIE A
IC102 CURIE B
IC103 (1/2) PLD2 (1/2)
IC103 (2/2) PLD2 (2/2)
IC104 CURIE C
IC105 CURIE D
BRR ENC MPEG4 STUDIO PROFILE
BRR DEC MPEG4 STUDIO PROFILE
CURIE A BB DT
CURIE B BB DT
CURIE C BB DT
CURIE D BB DT
IC300. 301. 400 SDRAM
IC550. 551. 600 SDRAM
IC1700. 1701. 1800 SDRAM
IC2000. 2001. 2100 SDRAM
CURIE A BVM BVS
CURIE B BVM BVS
CURIE C BVM BVS
CURIE D BVM BVS
HPR VOUT SG1. 0. SB1. 0. SR1. 0 SS1. 0
HPR DUBOUT SG1. 0. SB1. 0. SR1. 0 SS1. 0
HPR MY S9-0 S6-0
MY HPR S9-0 S6-0
MY HPR S9-7
HPR MY BR2-0
MY HPR BR2-0
IC804 MFV REC V S4-1
IC1300 (EQ) MFV PB S4-1
EE CVID BYP A 7-0 B 7-0
PB CVID A 7-0 B 7-0
BR1 DA7-0 BR0 DA7-0
2/3 EQ
HIF-46 HIF-56
IC3000 PLD1
IC2000 PLD3
IC1111 PLD4
IC3001 PLD2
HD SDI INPUT A B (OPTION)
HD SDI INPUT MONITOR A B (OPTION)
HD SDI OUTPUT A1 A2
HD SDI OUTPUT B1 (OPTION) B2 (OPTION)
HD SDI OUTPUT MONITOR A B (OPTION)
SD SDI OUTPUT 1 2
SD SDI OUTPUT MONITOR
SD OUTPUT COMPOSITE (MONITOR)
SD OUTPUT SYNC
IC200 EQ
IC201 EQ
IC207 DRIVER
IC206 DRIVER
IC204 DRIVER
IC202 DRIVER
IC208 DRIVER
IC209 DRIVER
IC210 DRIVER
IC211 DRIVER
IC5 BUFF
IC4 BUFF
IC2209 CHARA SUPER
IC2202 IC2204 IC2205 COMPOSITE ENC & D/A
IC2203 IC2206. 2207 COMPOSITE ENC & D/A
IC2201 VP
IC2200 VP
CP-398
RX
DE-MPX
DUAL TO RGB
INT SG
DLY
1. 5G VP LINK-A
1. 5G VP LINK B
3G VP 3G→1. 5G
3G→1. 5G
MPX
RGB TO DUAL
CHARA SUPER
HD CHARA GEN
SD CHARA GEN
VP CCC CROSS COLOR CANCEL
VITC ADD
AUDIO ANCILLARY DATA
BLACK BURST GEN
IC1502. 1503
IC2502
IC2100 VENUS
IC2101 (HIF-46) IC2102 (HIF-46) IC2105 (HIF-56) SDRAM
SD→HD DWN CONV
IC1300-1302 SDRAM
FLASH IC501
HIF AUD HSDI RX
P1 ICHK YG1. 0. CB1. 0. CR1. 0 YA1. 0
P2 LINE YG1. 0. CB1. 0. CR1. 0 YA1. 0
P2 MONI YG1. 0. CB1. 0. CR1. 0 YA1. 0
HIF VP OUT2 SD1. 0. SB1. 0. SR1. 0 SS1. 0
FC VOUT SY1. 0. SC1. 0
IC1201 P2 FC YA9-0 CA9-0 YB9-0 CB9-0
IC1200 FC RX Y9-0 C9-0
P2 DC HD VDY1. 0 VDC1. 0
HDCAM LOOP Y1. 0. C1. 0
P4 VSP HD VDY9-0 VDC9-0
P3 DCSD VD4-0
P2 SD VD4-0
APR AUD SSDI TX
APR AUD HSDI TX HDUB TX
P4 SD OUT LINE 9-0 MONI 9-0
P3 DSCD VD4-0
DVP LEGV SY1. 0. SC1. 0
HIF DVP SDV1. 0 (HIF DVP DCSDV1. 0)
DVP HIF SDV1. 0 (DVP HIF SDV SC1. 0)
APR AUD HSDI TX HDUB TX
APR AUD SDSDI TX
2/3 APR
HIF DIV D7-0
DVP-43 (HKSR-5802)
IC100 (4/4) PLD1 (4/4)
IC700 VENUS
IC604 REGALO
VSP HDOUT Y9-0 C9-0
HDCAM PB Y9-0 C9-0
HDCAM OUT FILTER 4 : 2 : 2→3 : 1 : 1
CNC VDOUT 1 7-0 0 7-0
IC701. 702 SDRAM
HD→SD UPCONV
IC100 (3/4) PLD1 (3/4)
IC200 PLD2 (2/2)
DB ADV PB VD9-0
DB DLY PB VD9-0
VIOLA OUT D9-0
IC404. 405 SDRAM
HIF DVP DCSDV1. 0
DVP HIF SDV SC1. 0
DVP SDV SY1. 0. SC1. 0
IC800 MPX
IC600 CNC HDCAM CONCEALMENT
HDEC VDOUT 1 7-0 0 7-0
IC500. 503 HDEC-0. 1
OUTER D15-0
IC100 (2/4) PLD1 (2/4) HDCAM AUX PROC
IC106 ADAM-HS OUTER ECC DEC
IC100 (1/4) PLD1 (1/4) AUDIO SYNC REPLACEMENT
EQ ECO X7-0. Y7-0
IC104 EQ LEG PB1 S4-1
IC601 SDRAM
IC501. 502 SDRAM
IC107 SDRAM
IC400 VIOLA D-BETA VIDEO PROC
IC200 (1/2) PLD2 (1/2) D-BETA META PROC
IC201 BDEC D-BETA BRR DEC
IC401-403 SDRAM
IC303-307 FIELD MEMORY
IC300-302 SRAM
LEG ADV AUD (LEG PB AUD) 1/2. 3/4
HKSR-5001
FC-111
IC300 (2/2) PLD1 (2/2)
IC500 (1/2) PLD2 (1/2)
IC300 (1/2) PLD1 (1/2)
PP PD OUT1 Y9-0. C9-0
PP PD OUT2 Y9-0. C9-0
PP PD IN Y9-0 C9-0
59Hz→23Hz PULLDOWN
IC3001-3003 SDRAM
IC900 VFS VIDEO FRAME SYNCHRONIZER
IC2300 VENUS2 THROUGH 1080i→720P 720P→1080i
IC2301. 2302 SDRAM
IC2100 VENUS1 THROUGH 1080i→720P 720P→1080i
IC2101. 2102 SDRAM
HD→SD
HD VFS OUT A9-0. B9-0
HD VENUS2 OUT Y9-0. C9-0
HD VENUS1 OUT Y9-0. C9-0
HD VFS IN A9-0 B9-0
HD VENUS2 IN Y9-0 C9-0
HD VENUS1 IN Y9-0 C9-0
SD INPUT D9-0
HD INPUT 47-0 CK74M IN
SD INPUT CK27M IN
HIF VP OUT2 SG1. 0. SB1. 0 SR1. 0. SS1. 0 SCK
VPR SDV (DVP SDV) SY1. 0. SC1. 0 CK
IC402 HD CHARA GEN
IC1200 TG
X1202. 1203 74MHz PLL
X1204. 1205 27MHz PLL
X1200. 1201 AU CK PLL
REF TG CK74M
HDSDI F. V. H
HDCOMP
SDCOMP
SDBST
REF GEN
REF CN HD SYNC
REF CN SD SYNC
SD BST
HD SYNC SEP
SD SYNC/BST SEP
CP REF BX
IC1800. 1807 JITTER CLEANER
CK148M
CK74M
HD REF
SD REF
AU REF
HPR FC (APR FC) INT FRM. INT H HD SYNC SD SYNC. SD BST INT CK (74M)
APR
CONT HD CG SIN
AU HDOUT 12. 34. 56. 78. 9A. BC
IC500 (2/2) PLD2 (2/2)
APR FC AUD 1/2. 3/4. 5/6. 7/8. 9/A. B/C
FC V OUT SY1. 0. SC1. 0. SCK
SD OUTPUT Y9-0. C9-0
CK74M SDOUT
IC1004 P→S
IC1303-1305 SDRAM
HKSR-5001
FC-91
IC300 PLD1
HD SIGNAL CTRL (FORMAT CONV)
TX-96 TX-127
HD SDI ENC
HD OUTPUT 1 Y9-0. C9-0
HD OUTPUT 2 Y9-0. C9-0
AU HDOUT 1 1/2. 3/4. 5/6 7/8. 9/A. B/C
AU HDOUT 2 1/2. 3/4. 5/6 7/8. 9/A. B/C
IC900 VFS VIDEO FRAME SYNCHRONIZER
IC902. 903 SDRAM
IC700 VSP VIDEO SLOW PROC
IC702-705 SDRAM
IC500 PLD2 SD SIG CTRL
IC302 HD CHARA GEN
HD VFS IN A9-0. B9-0
HD VSP IN Y9-0. C9-0
SD VSP IN A9-0. B9-0
HD PLD1 IN Y9-0. C9-0
SD INPUT
HD PLD1 OUT Y9-0. C9-0
HD INPUT YG11-2 CB11-2 R11-2 HD F. V. H
SD INPUT A9-0 SD F. V. H
HIF VP OUT2 SG1. 0. SB1. 0 SR1. 0. SS1. 0 SCK
VPR SDV (DVP SDV) SY1. 0. SC1. 0 CK
APR FC AUD 1/2. 3/4. 5/6. 7/8. 9/A. B/C
AU HD OUT1
AU HD OUT2
IC1200 TG
X1202. 1203 74MHz PLL
X1204. 1205 27MHz PLL
X1200. 1201 AU CK PLL
REF TG CK74M
HDSDI F. V. H
HDCOMP
SDCOMP
SDBST
HD SYNC SEP
SD SYNC/BST SEP
CP REF BX
HPR FC (APR FC) INT FRM. INT H HD SYNC SD SYNC. SD BST INT CK (74M)
APR
SD OUTPUT Y9-0. C9-0
CK74M SDOUT
IC1004 P→S
FC V OUT SY1. 0. SC1. 0. SCK
CP-398
REF2 IN (OPTION)
BUFF
75
CP REF BX

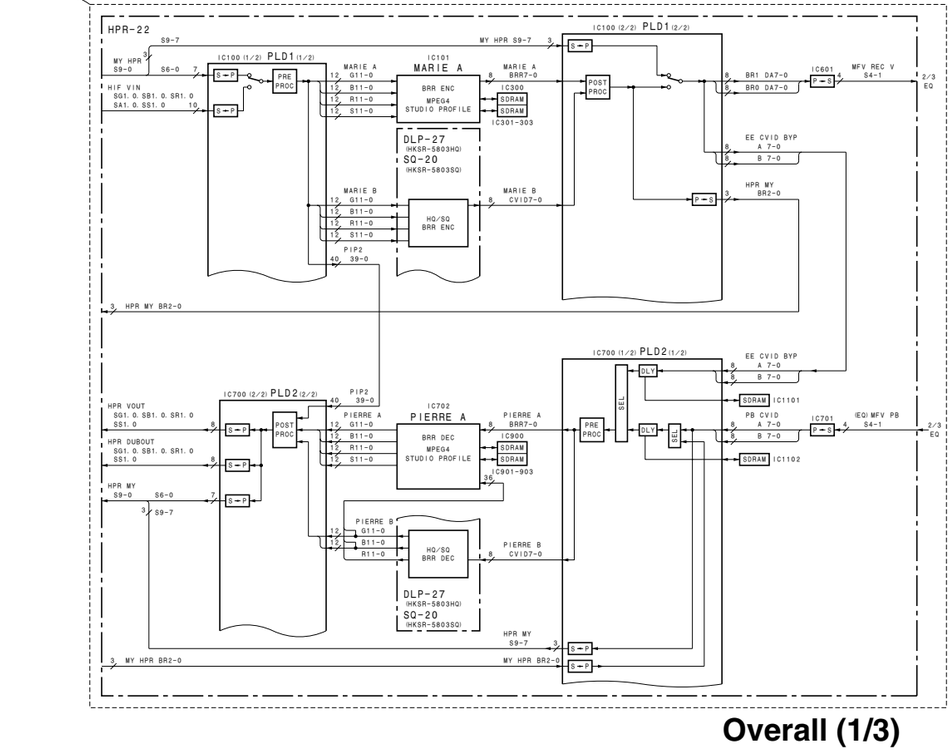
HPR-22
S9-7
MY HPR S9-0
S6-0
HIF VIN
SG1. 0 SB1. 0 SR1. 0
SA1. 0 SS1. 0
IC100 (1/2) PLD1 (1/2)
S→P
PRE PROC
MARIE A G11-0
B11-0
R11-0
S11-0
IC101
MARIE A
BRR ENC
MPEG4
STUDIO PROFILE
MARIE A BRR7-0
IC300
SDRAM
IC301-303
DLP-27
(HKSR-5803HQ)
SQ-20
(HKSR-5803SQ)
MARIE B G11-0
B11-0
R11-0
S11-0
HQ/SQ BRR ENC
MARIE B CVID7-0
PIP2 39-0
HPR MY BR2-0
MY HPR S9-7
IC100 (2/2) PLD1 (2/2)
POST PROC
BR1 DA7-0
BR0 DA7-0
IC601
P→S
MFV REC V S4-1
2/3 EQ
EE CVID BYP A 7-0
B 7-0
HPR MY BR2-0
IC700 (1/2) PLD2 (1/2)
DLY
SEL
SDRAM IC1101
PB CVID A 7-0
B 7-0
IC701
(EQ) MFV PB S4-1
SDRAM IC1102
IC700 (2/2) PLD2 (2/2)
HPR VOUT SG1. 0 SB1. 0 SR1. 0 SS1. 0
HPR DUBOUT SG1. 0 SB1. 0 SR1. 0 SS1. 0
HPR MY S9-0
S6-0
S9-7
PIERRE A G11-0
B11-0
R11-0
S11-0
IC702
PIERRE A
BRR DEC
MPEG4
STUDIO PROFILE
PIERRE A BRR7-0
IC900
IC901-903
PIERRE B G11-0
B11-0
R11-0
HQ/SQ BRR DEC
PIERRE B CVID7-0
HPR MY S9-7
MY HPR BR2-0

Overall (1/3)

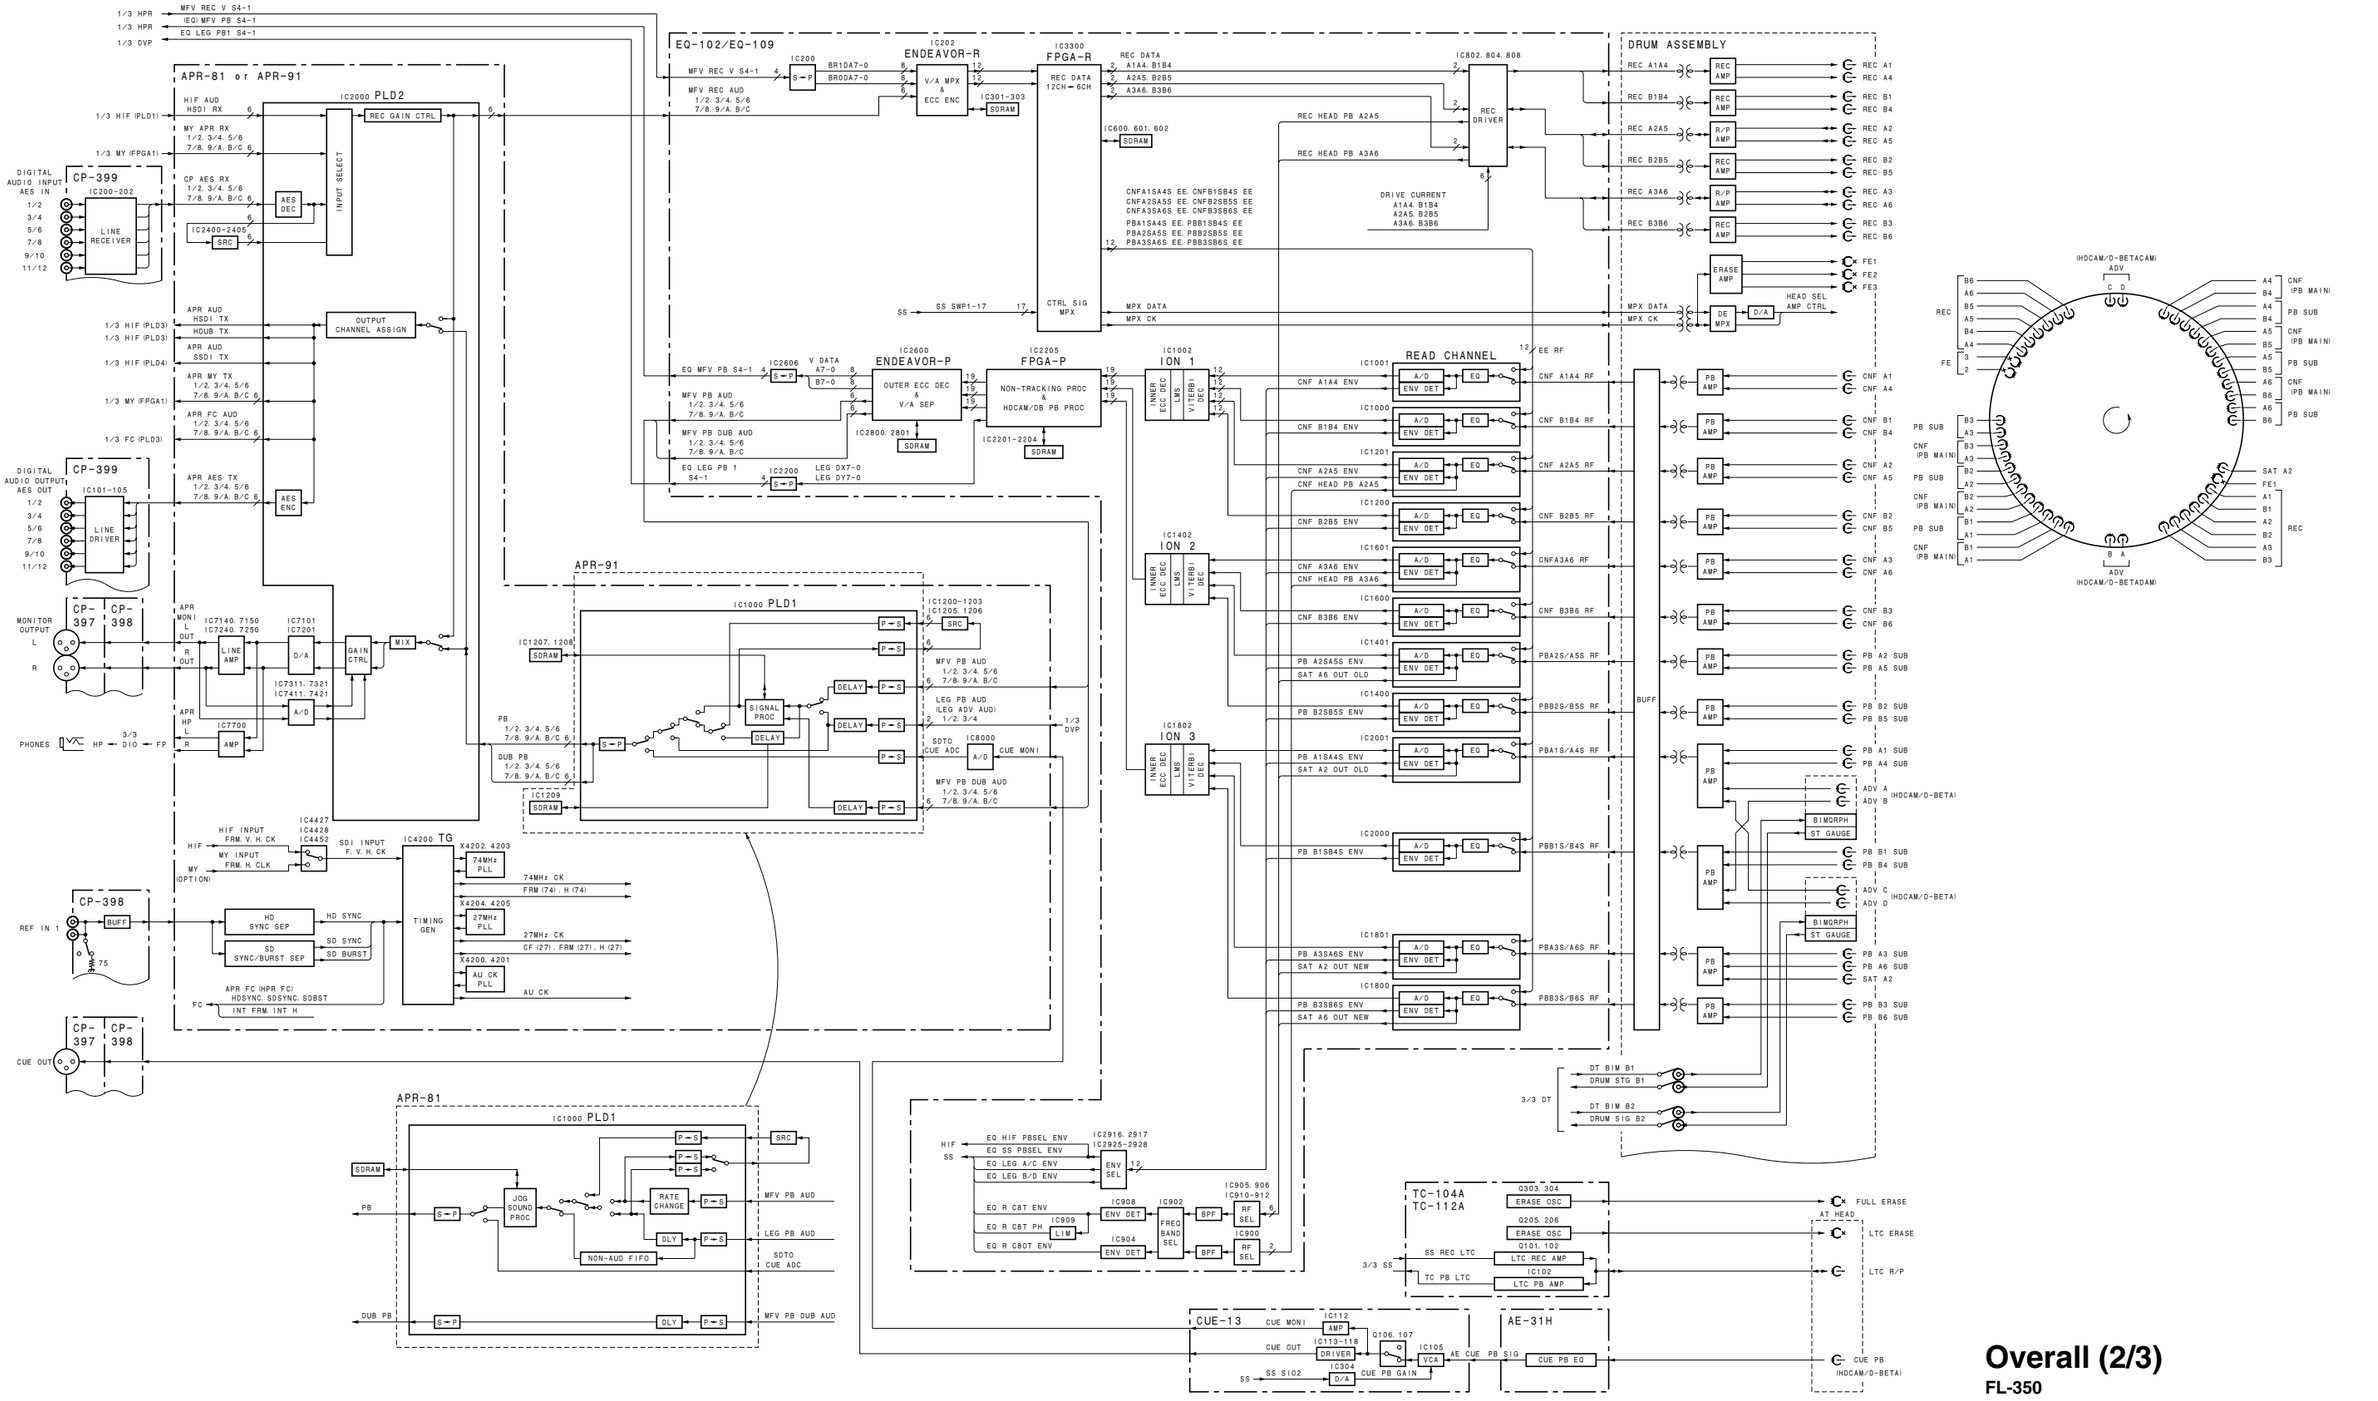

Overall (2/3)
FL-350

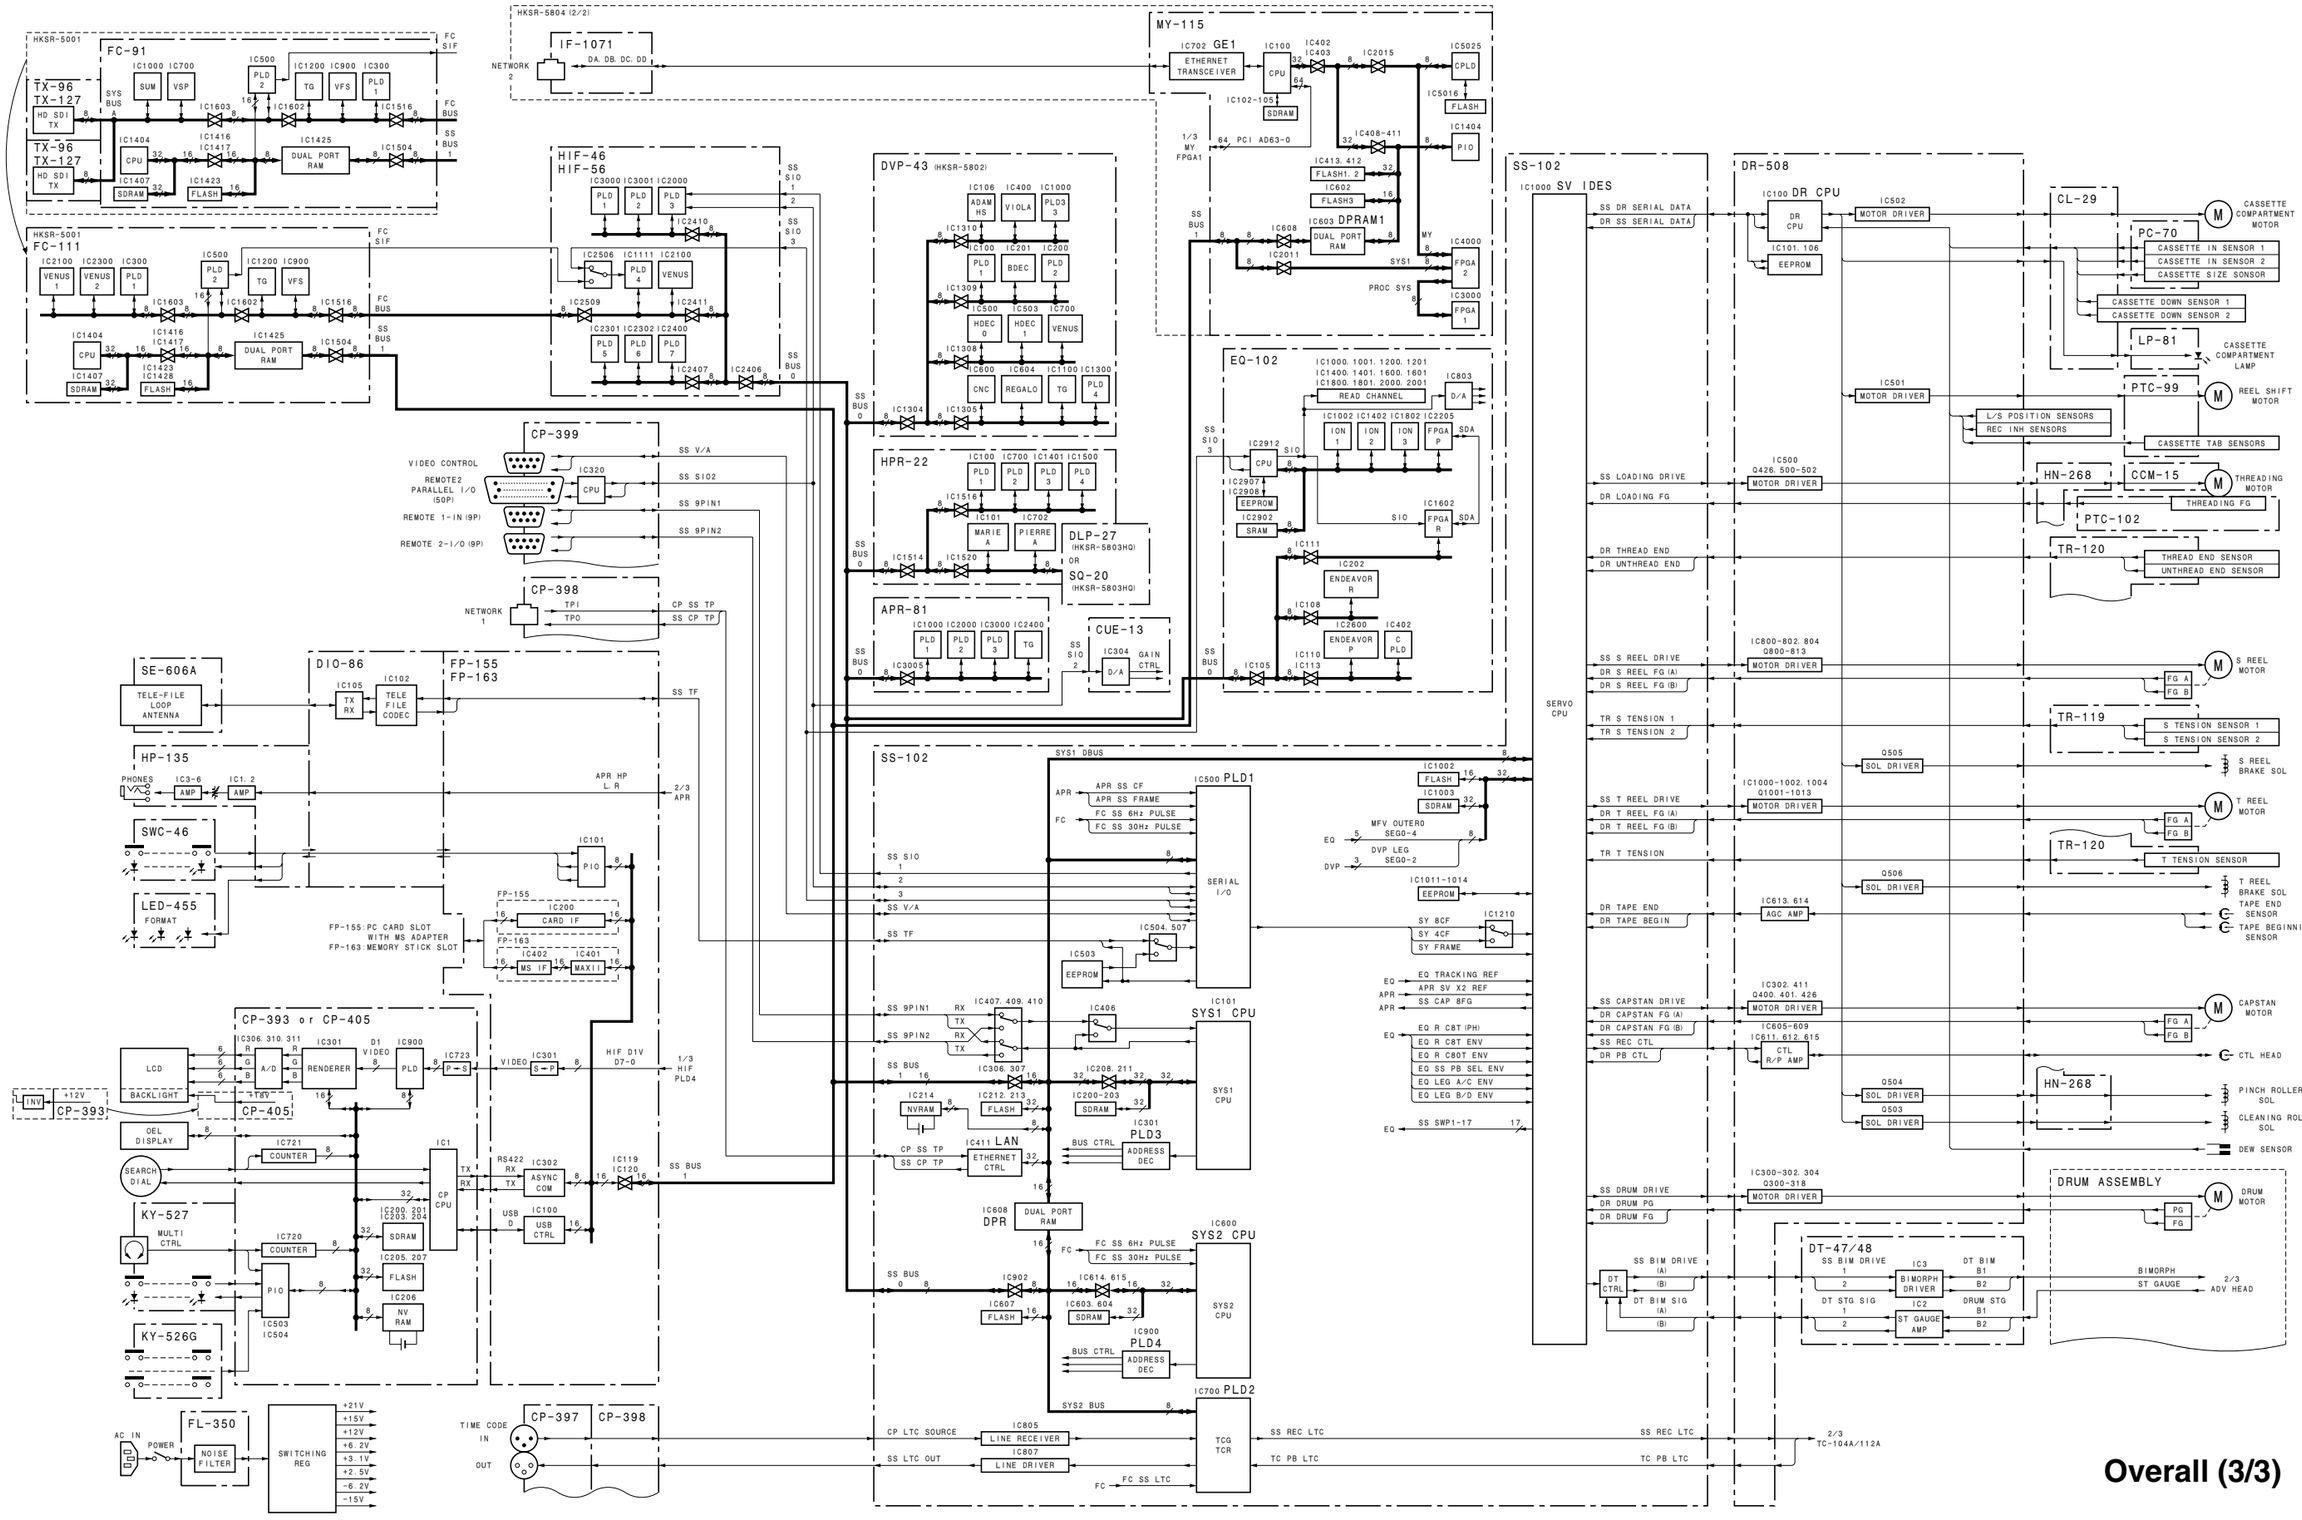
HKSR-5001
FC-91
TX-96
TX-127
HD SDI TX
SUM
VSP
TG
VFS
PLD 1
PLD 2
CPU
SDRAM
FLASH
DUAL PORT RAM
FC SIF
FC BUS
SS BUS 1
HKSR-5001
FC-111
VENUS 1
VENUS 2
PLD 3
HKSR-5804 (2/2)
IF-1071
DA. DB. DC. DD
NETWORK 2
HIF-46
HIF-56
PLD 5
PLD 6
PLD 7
SS SIO 1
SS SIO 2
SS SIO 3
SS BUS 0
DVP-43 (HKSR-5802)
ADAM HS
VIOLA
PLD 4
BDEC
HDEC 0
HDEC 1
CNC
REGALO
HPR-22
MARIE A
PIERRE A
DLP-27 (HKSR-5803HQ)
OR
SQ-20 (HKSR-5803HQ)
APR-81
MY-115
ETHERNET TRANSCEIVER
SDRAM
PCI AD63-0
1/3 MY FPGA1
FLASH1. 2
FLASH3
DPRAM1
DUAL PORT RAM
PIO
CPLD
FLASH
FPGA 2
FPGA 1
PROC SYS
SYS1
EQ-102
READ CHANNEL
D/A
ION 1
ION 2
ION 3
FPGA P
FPGA R
SDA
SIO
EEPROM
SRAM
ENDEAVOR R
ENDEAVOR P
C PLD
CUE-13
GAIN CTRL
CP-399
VIDEO CONTROL
REMOTE2 PARALLEL I/O (50P)
REMOTE 1-IN (9P)
REMOTE 2-I/O (9P)
SS V/A
SS SIO2
SS 9PIN1
SS 9PIN2
CP-398
NETWORK 1
TPI
TPO
CP SS TP
SS CP TP
SE-606A
TELE-FILE LOOP ANTENNA
DIO-86
TX RX
TELE FILE CODEC
FP-155
FP-163
SS TF
HP-135
PHONES
AMP
APR HP L R
2/3 APR
SWC-46
PIO
LED-455
FORMAT
FP-155:PC CARD SLOT WITH MS ADAPTER
FP-163:MEMORY STICK SLOT
CARD IF
MS IF
MAXI
CP-393 or CP-405
LCD
BACKLIGHT
INV
+12V
CP-393
CP-405
A/D
RENDERER
PLD
P-S
S-P
VIDEO
HIF DIV D7-0
1/3 HIF PLD4
OEL DISPLAY
SEARCH DIAL
KY-527
MULTI CTRL
KY-526G
COUNTER
SDRAM
FLASH
NV RAM
CP CPU
ASYNC COM
USB CTRL
RS422
SS BUS 1
FL-350
AC IN
POWER
NOISE FILTER
SWITCHING REG
+21V
+15V
+12V
+6.2V
+3.1V
+2.5V
-6.2V
-15V
CP-397
CP-398
TIME CODE IN
OUT
SS-102
SYS1 DBUS
SERIAL I/O
PLD1
SYS1 CPU
EEPROM
NVRAM
ETHERNET CTRL
LAN
ADDRESS DEC
PLD3
DUAL PORT RAM
DPR
SYS2 CPU
PLD4
PLD2
TCG TCR
SYS2 BUS
LINE RECEIVER
LINE DRIVER
SS LTC SOURCE
SS LTC OUT
SS REC LTC
TC PB LTC
FC SS LTC
APR SS CF
APR SS FRAME
FC SS 6Hz PULSE
FC SS 30Hz PULSE
MFV OUTERO SEGO-4
DVP LEG SEGO-2
SY 8CF
SY 4CF
SY FRAME
EQ TRACKING REF
APR SV X2 REF
SS CAP 8FG
EQ R C8T (PH)
EQ R C8T ENV
EQ R C80T ENV
EQ SS PB SEL ENV
EQ LEG A/C ENV
EQ LEG B/D ENV
SS SWP1-17
SS-102
SV IDES
SERVO CPU
SS DR SERIAL DATA
DR SS SERIAL DATA
SS LOADING DRIVE
DR LOADING FG
DR THREAD END
DR UNTHREAD END
SS S REEL DRIVE
DR S REEL FG (A)
DR S REEL FG (B)
TR S TENSION 1
TR S TENSION 2
SS T REEL DRIVE
DR T REEL FG (A)
DR T REEL FG (B)
TR T TENSION
DR TAPE END
DR TAPE BEGIN
SS CAPSTAN DRIVE
DR CAPSTAN FG (A)
DR CAPSTAN FG (B)
SS REC CTL
DR PB CTL
SS DRUM DRIVE
DR DRUM PG
DR DRUM FG
SS BIM DRIVE (A)
(B)
DT BIM SIG (A)
(B)
DR-508
DR CPU
EEPROM
MOTOR DRIVER
SOL DRIVER
AGC AMP
CTL R/P AMP
CL-29
CASSETTE COMPARTMENT MOTOR
PC-70
CASSETTE IN SENSOR 1
CASSETTE IN SENSOR 2
CASSETTE SIZE SONSOR
CASSETTE DOWN SENSOR 1
CASSETTE DOWN SENSOR 2
LP-81
CASSETTE COMPARTMENT LAMP
PTC-99
REEL SHIFT MOTOR
L/S POSITION SENSORS
REC INH SENSORS
CASSETTE TAB SENSORS
HN-268
CCM-15
THREADING MOTOR
THREADING FG
PTC-102
TR-120
THREAD END SENSOR
UNTHREAD END SENSOR
S REEL MOTOR
FG A
FG B
TR-119
S TENSION SENSOR 1
S TENSION SENSOR 2
S REEL BRAKE SOL
T REEL MOTOR
T TENSION SENSOR
T REEL BRAKE SOL
TAPE END SENSOR
TAPE BEGINNING SENSOR
CAPSTAN MOTOR
CTL HEAD
PINCH ROLLER SOL
CLEANING ROLLER SOL
DEW SENSOR
DRUM ASSEMBLY
DRUM MOTOR
PG
FG
DT-47/48
DT CTRL
BIMORPH DRIVER
ST GAUGE AMP
DT BIM B1 B2
DRUM STG B1 B2
BIMORPH ST GAUGE
2/3 ADV HEAD
2/3 TC-104A/112A
Overall (3/3)

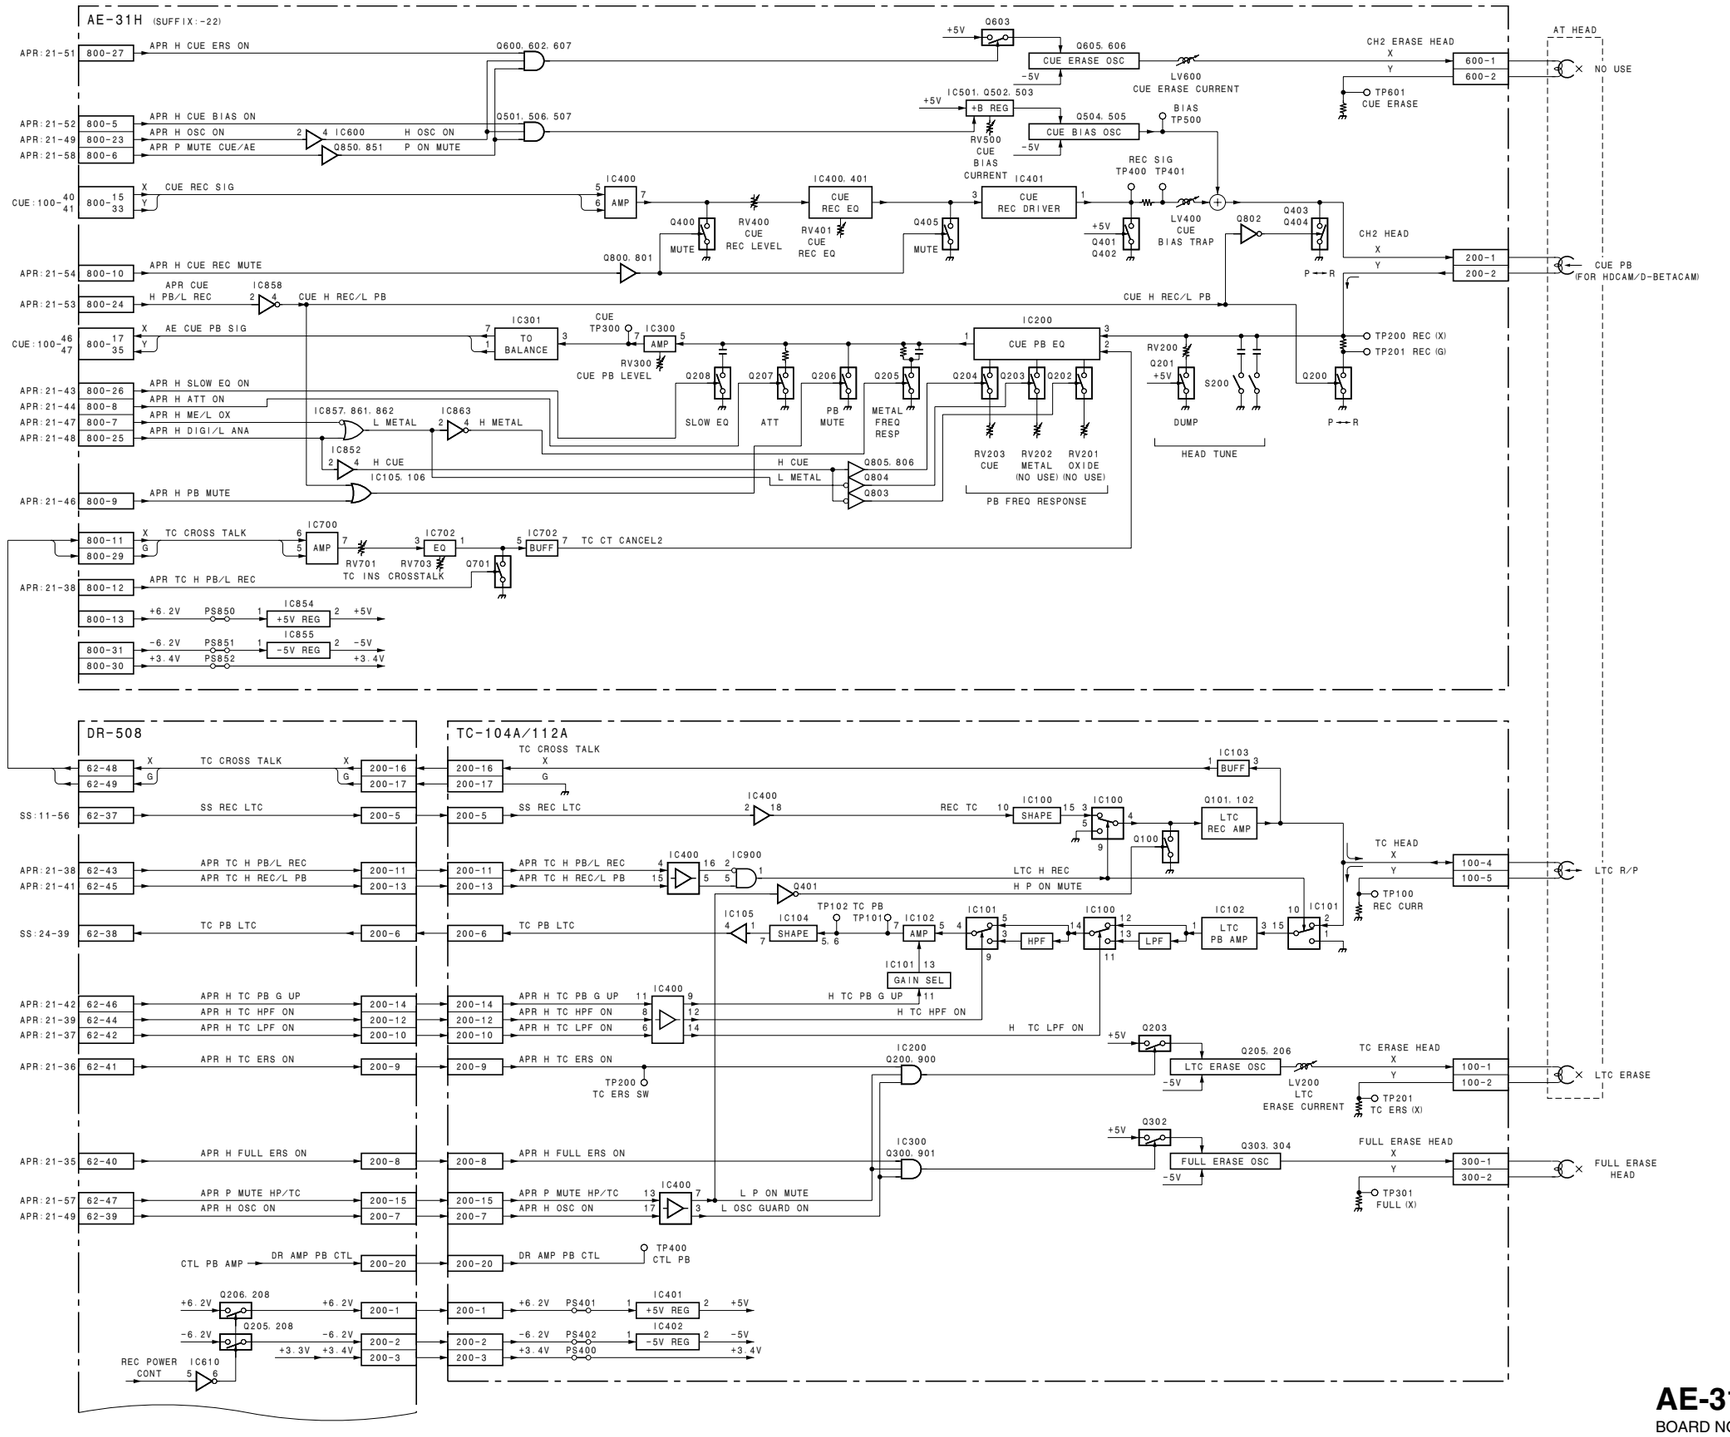

AE-31H
BOARD NO. 1-677-287-22

TC-104A, 112A

AE-31H , TC-104A, 112A
SUFFIX: -25

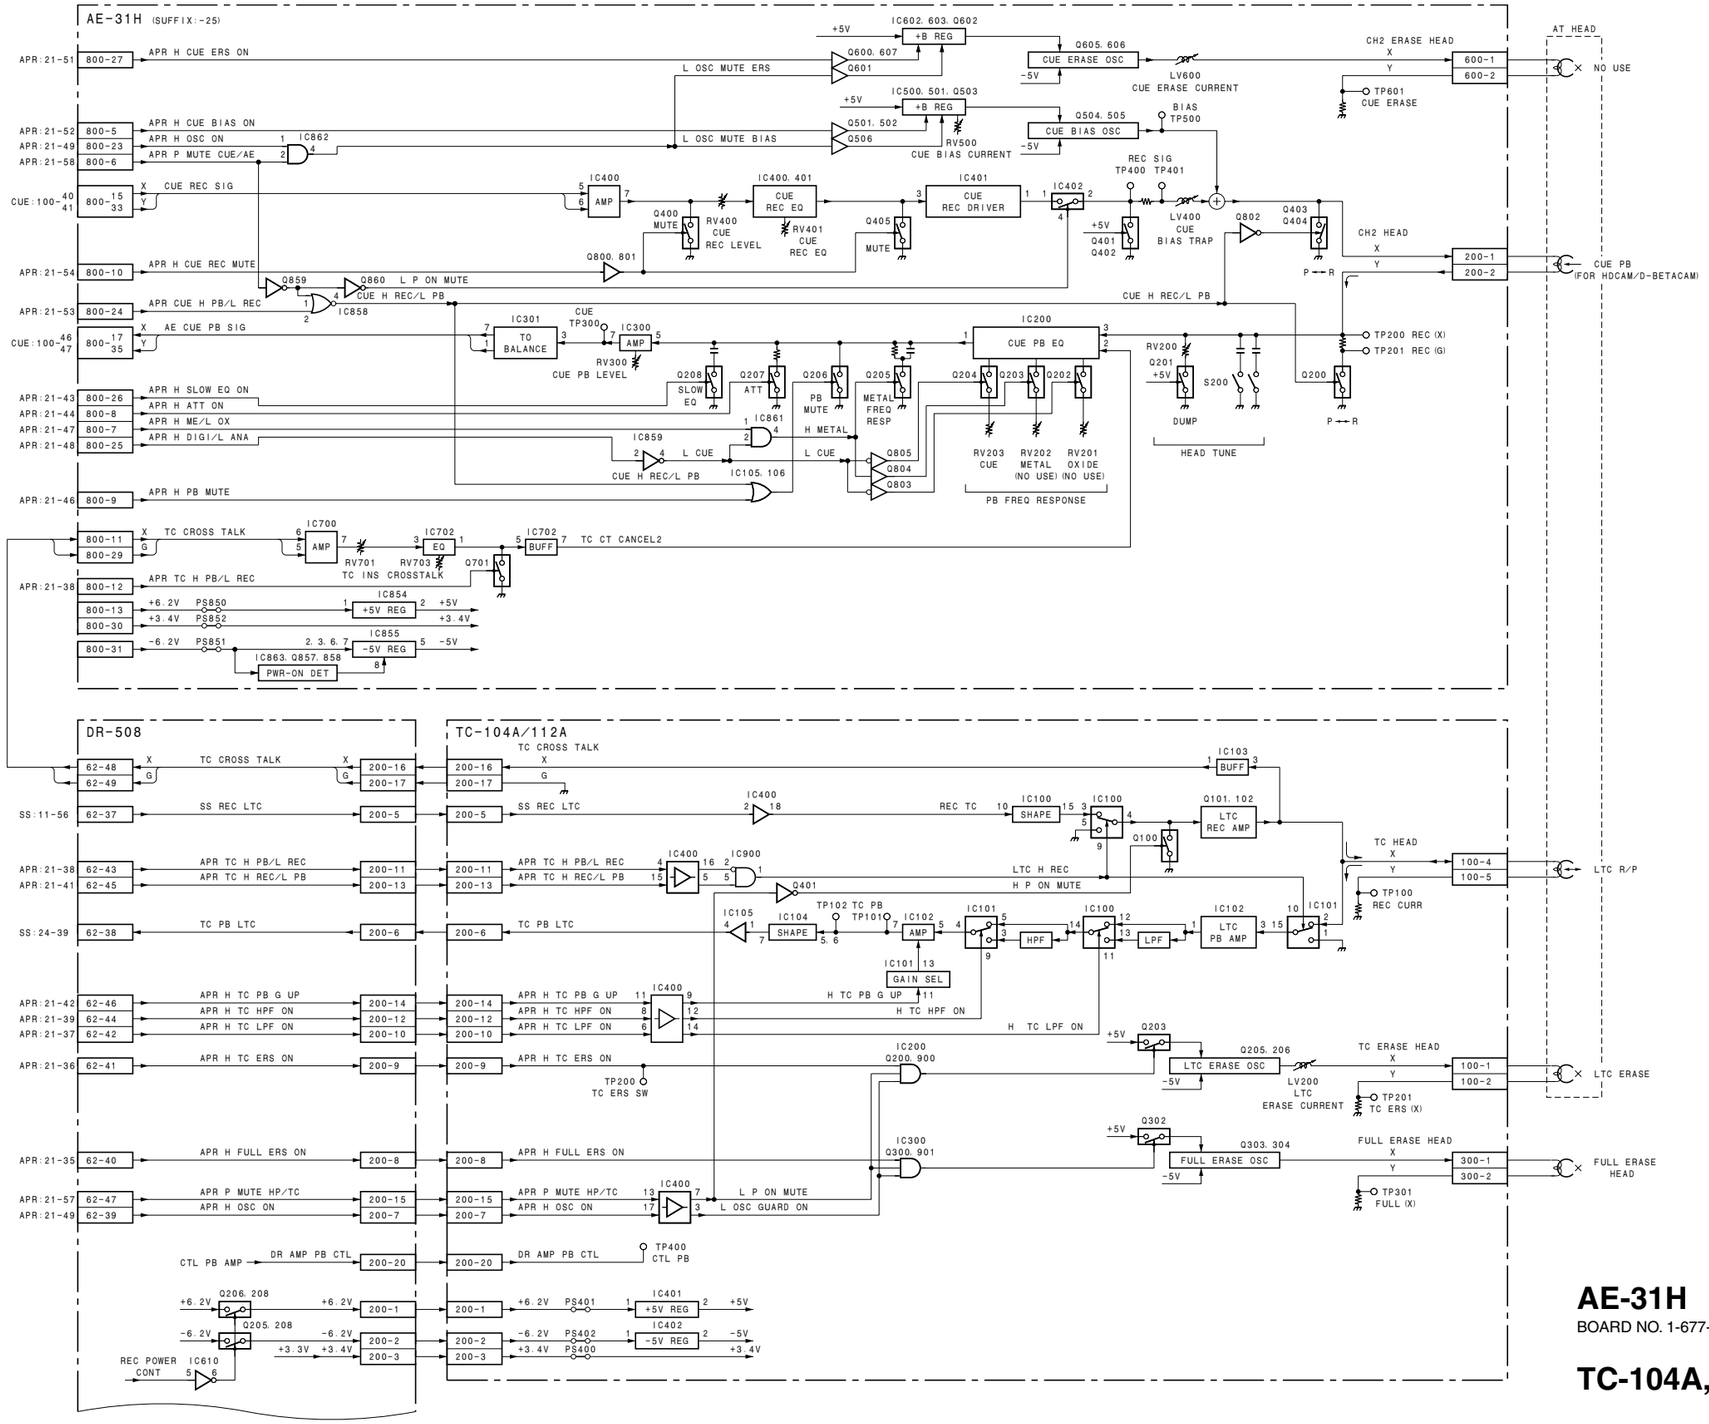

AE-31H
BOARD NO. 1-677-287-25

TC-104A, 112A

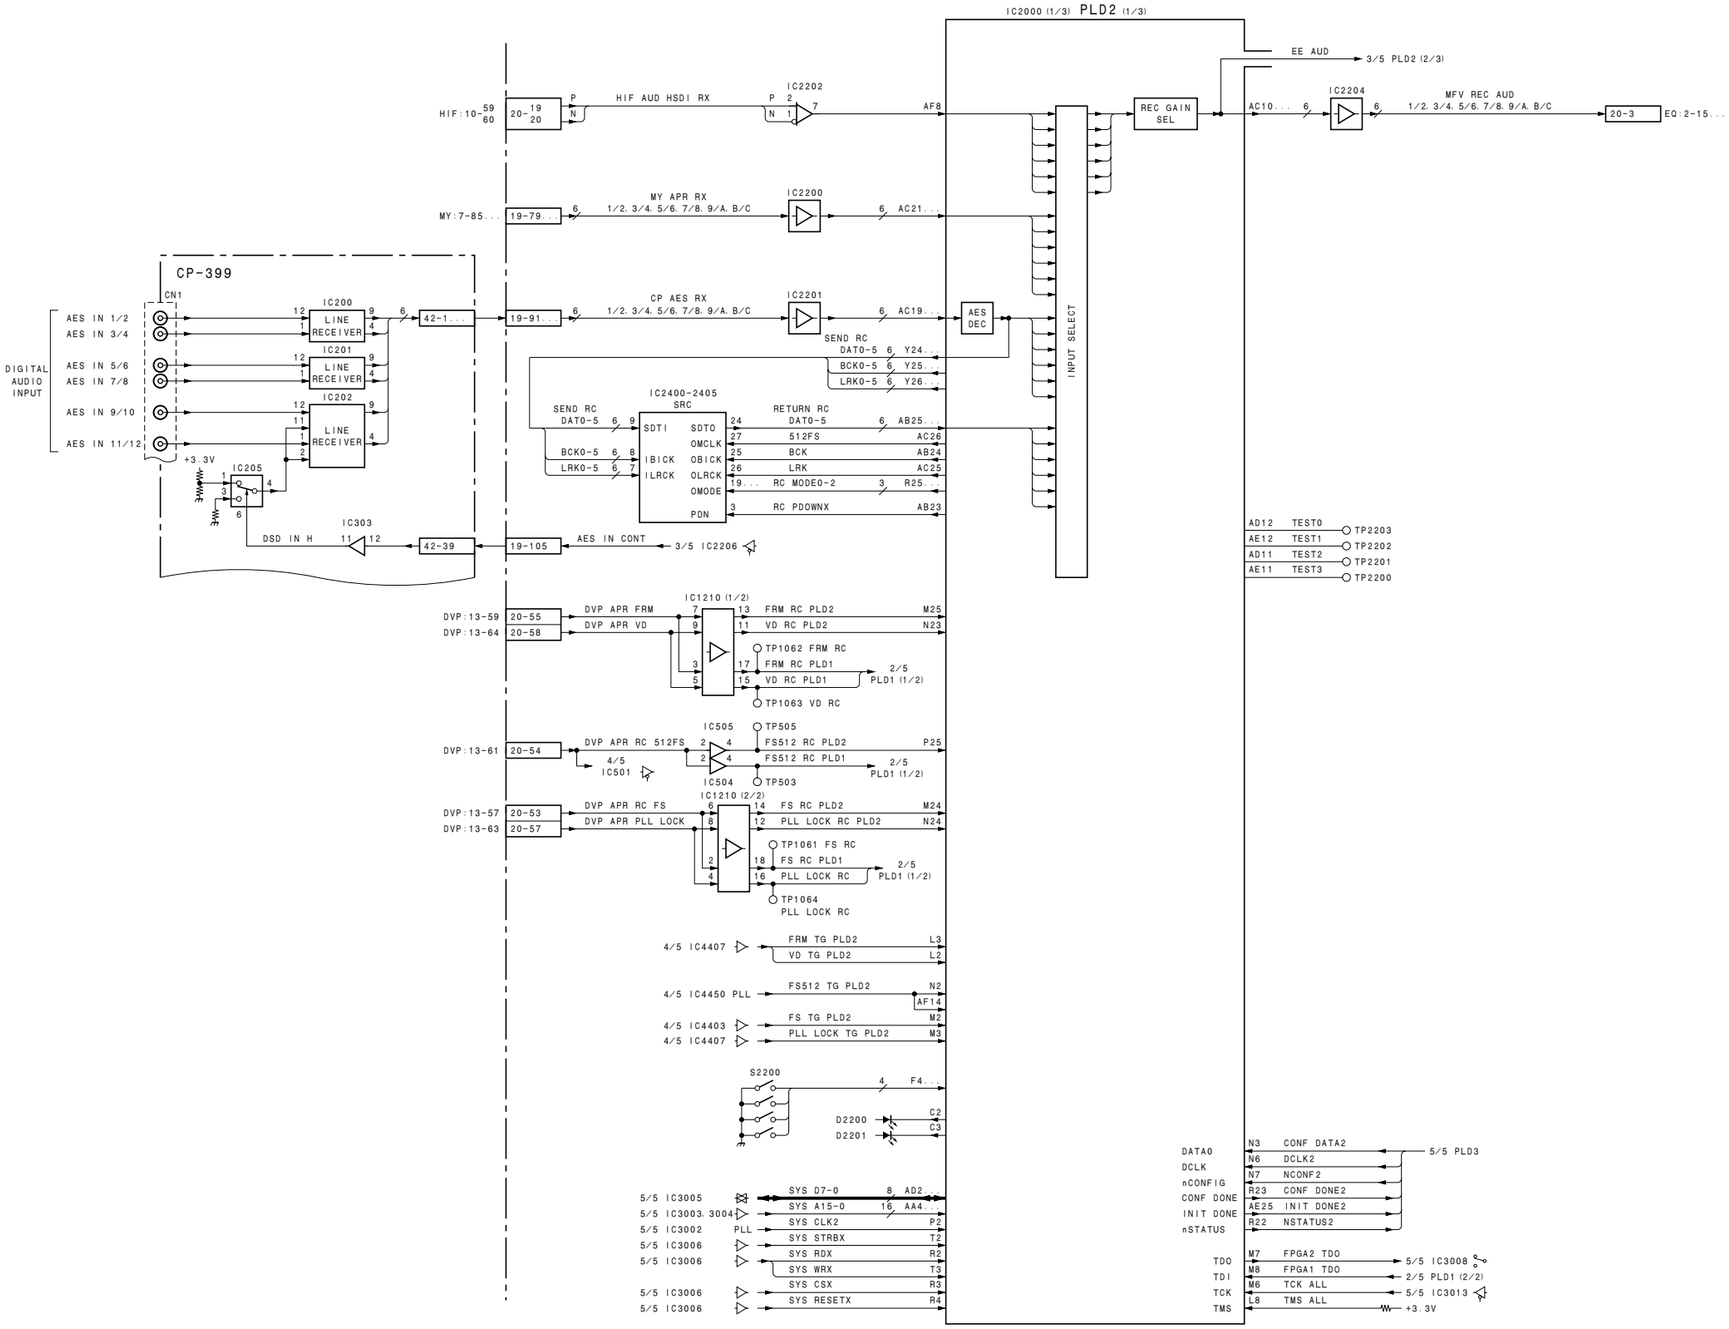
IC2000 (1/3) PLD2 (1/3)
CP-399
CN1
DIGITAL AUDIO INPUT
AES IN 1/2
AES IN 3/4
AES IN 5/6
AES IN 7/8
AES IN 9/10
AES IN 11/12
IC200 LINE RECEIVER
IC201 LINE RECEIVER
IC202 LINE RECEIVER
+3.3V
IC205
IC303
DSD IN H
42-1...
42-39
HIF:10-59 60
20-19 20
HIF AUD HSDI RX
IC2202
AF8
MY:7-85...
19-79...
MY APR RX 1/2. 3/4. 5/6. 7/8. 9/A. B/C
IC2200
AC21...
19-91...
CP AES RX 1/2. 3/4. 5/6. 7/8. 9/A. B/C
IC2201
AC19...
AES DEC
SEND RC DAT0-5 BCK0-5 LRK0-5
Y24... Y25... Y26...
IC2400-2405 SRC
SDTI IBICK ILRCK
SDTO OMCLK OBICK OLRCK OMODE PDN
RETURN RC DAT0-5
AB25...
512FS AC26
BCK AB24
LRK AC25
RC MODE0-2 R25...
RC PDOWNX AB23
19-105
AES IN CONT
3/5 IC2206
REC GAIN SEL
INPUT SELECT
EE AUD
3/5 PLD2 (2/3)
IC2204
AC10...
MFV REC AUD 1/2. 3/4. 5/6. 7/8. 9/A. B/C
20-3
EQ:2-15...
AD12 TEST0 TP2203
AE12 TEST1 TP2202
AD11 TEST2 TP2201
AE11 TEST3 TP2200
DVP:13-59 DVP:13-64
20-55 20-58
DVP APR FRM
DVP APR VD
IC1210 (1/2)
FRM RC PLD2 M25
VD RC PLD2 N23
TP1062 FRM RC
FRM RC PLD1
VD RC PLD1
2/5 PLD1 (1/2)
TP1063 VD RC
DVP:13-61 20-54
DVP APR RC 512FS
4/5 IC501
IC505 IC504
TP505 TP503
FS512 RC PLD2 P25
FS512 RC PLD1
2/5 PLD1 (1/2)
DVP:13-57 DVP:13-63
20-53 20-57
DVP APR RC FS
DVP APR PLL LOCK
IC1210 (2/2)
FS RC PLD2 M24
PLL LOCK RC PLD2 N24
TP1061 FS RC
FS RC PLD1
PLL LOCK RC
2/5 PLD1 (1/2)
TP1064 PLL LOCK RC
4/5 IC4407
FRM TG PLD2 L3
VD TG PLD2 L2
4/5 IC4450 PLL
FS512 TG PLD2 N2
AF14
4/5 IC4403
FS TG PLD2 M2
4/5 IC4407
PLL LOCK TG PLD2 M3
S2200
F4...
D2200 D2201
C2 C3
5/5 IC3005
5/5 IC3003. 3004
5/5 IC3002
5/5 IC3006
5/5 IC3006
5/5 IC3006
5/5 IC3006
SYS D7-0 AD2
SYS A15-0 AA4
SYS CLK2 P2
SYS STRBX T2
SYS RDX R2
SYS WRX T3
SYS CSX R3
SYS RESETX R4
DATA0 DCLK nCONFIG CONF DONE INIT DONE nSTATUS
N3 CONF DATA2
N6 DCLK2
N7 NCONF2
R23 CONF DONE2
AE25 INIT DONE2
R22 NSTATUS2
5/5 PLD3
TDO TDI TCK TMS
M7 FPGA2 TDO
M8 FPGA1 TDO
M6 TCK ALL
L8 TMS ALL
5/5 IC3008
2/5 PLD1 (2/2)
5/5 IC3013
+3.3V

APR-81 (1/5)

APR-81 (2/5)

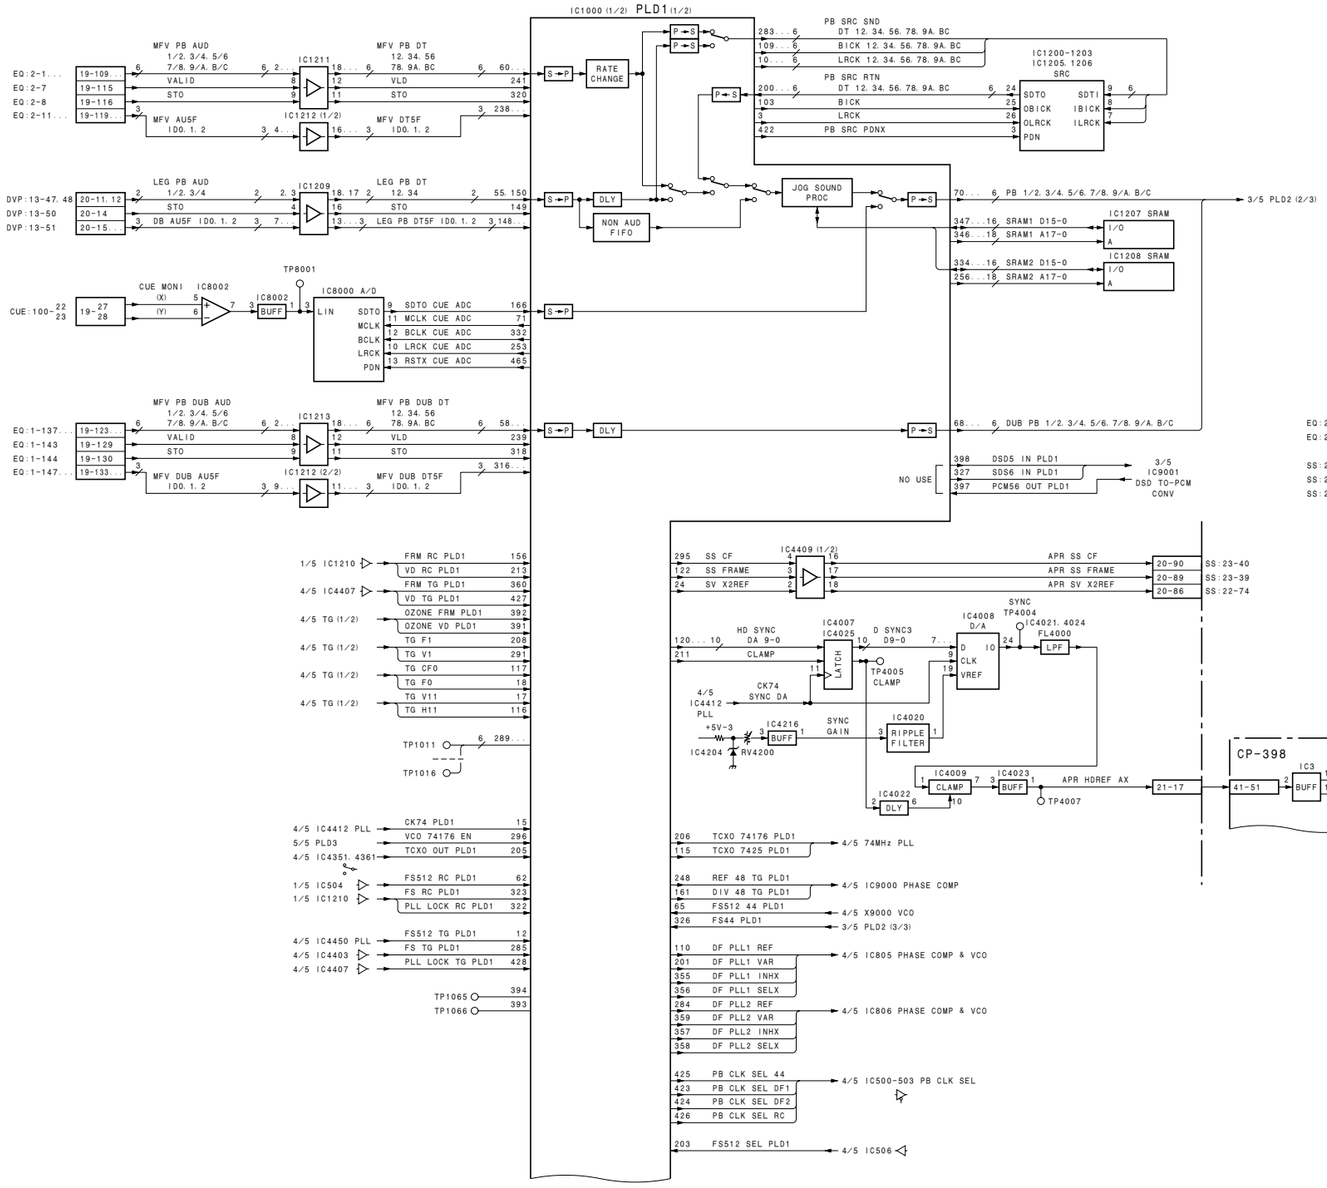

APR-81 (2/5)

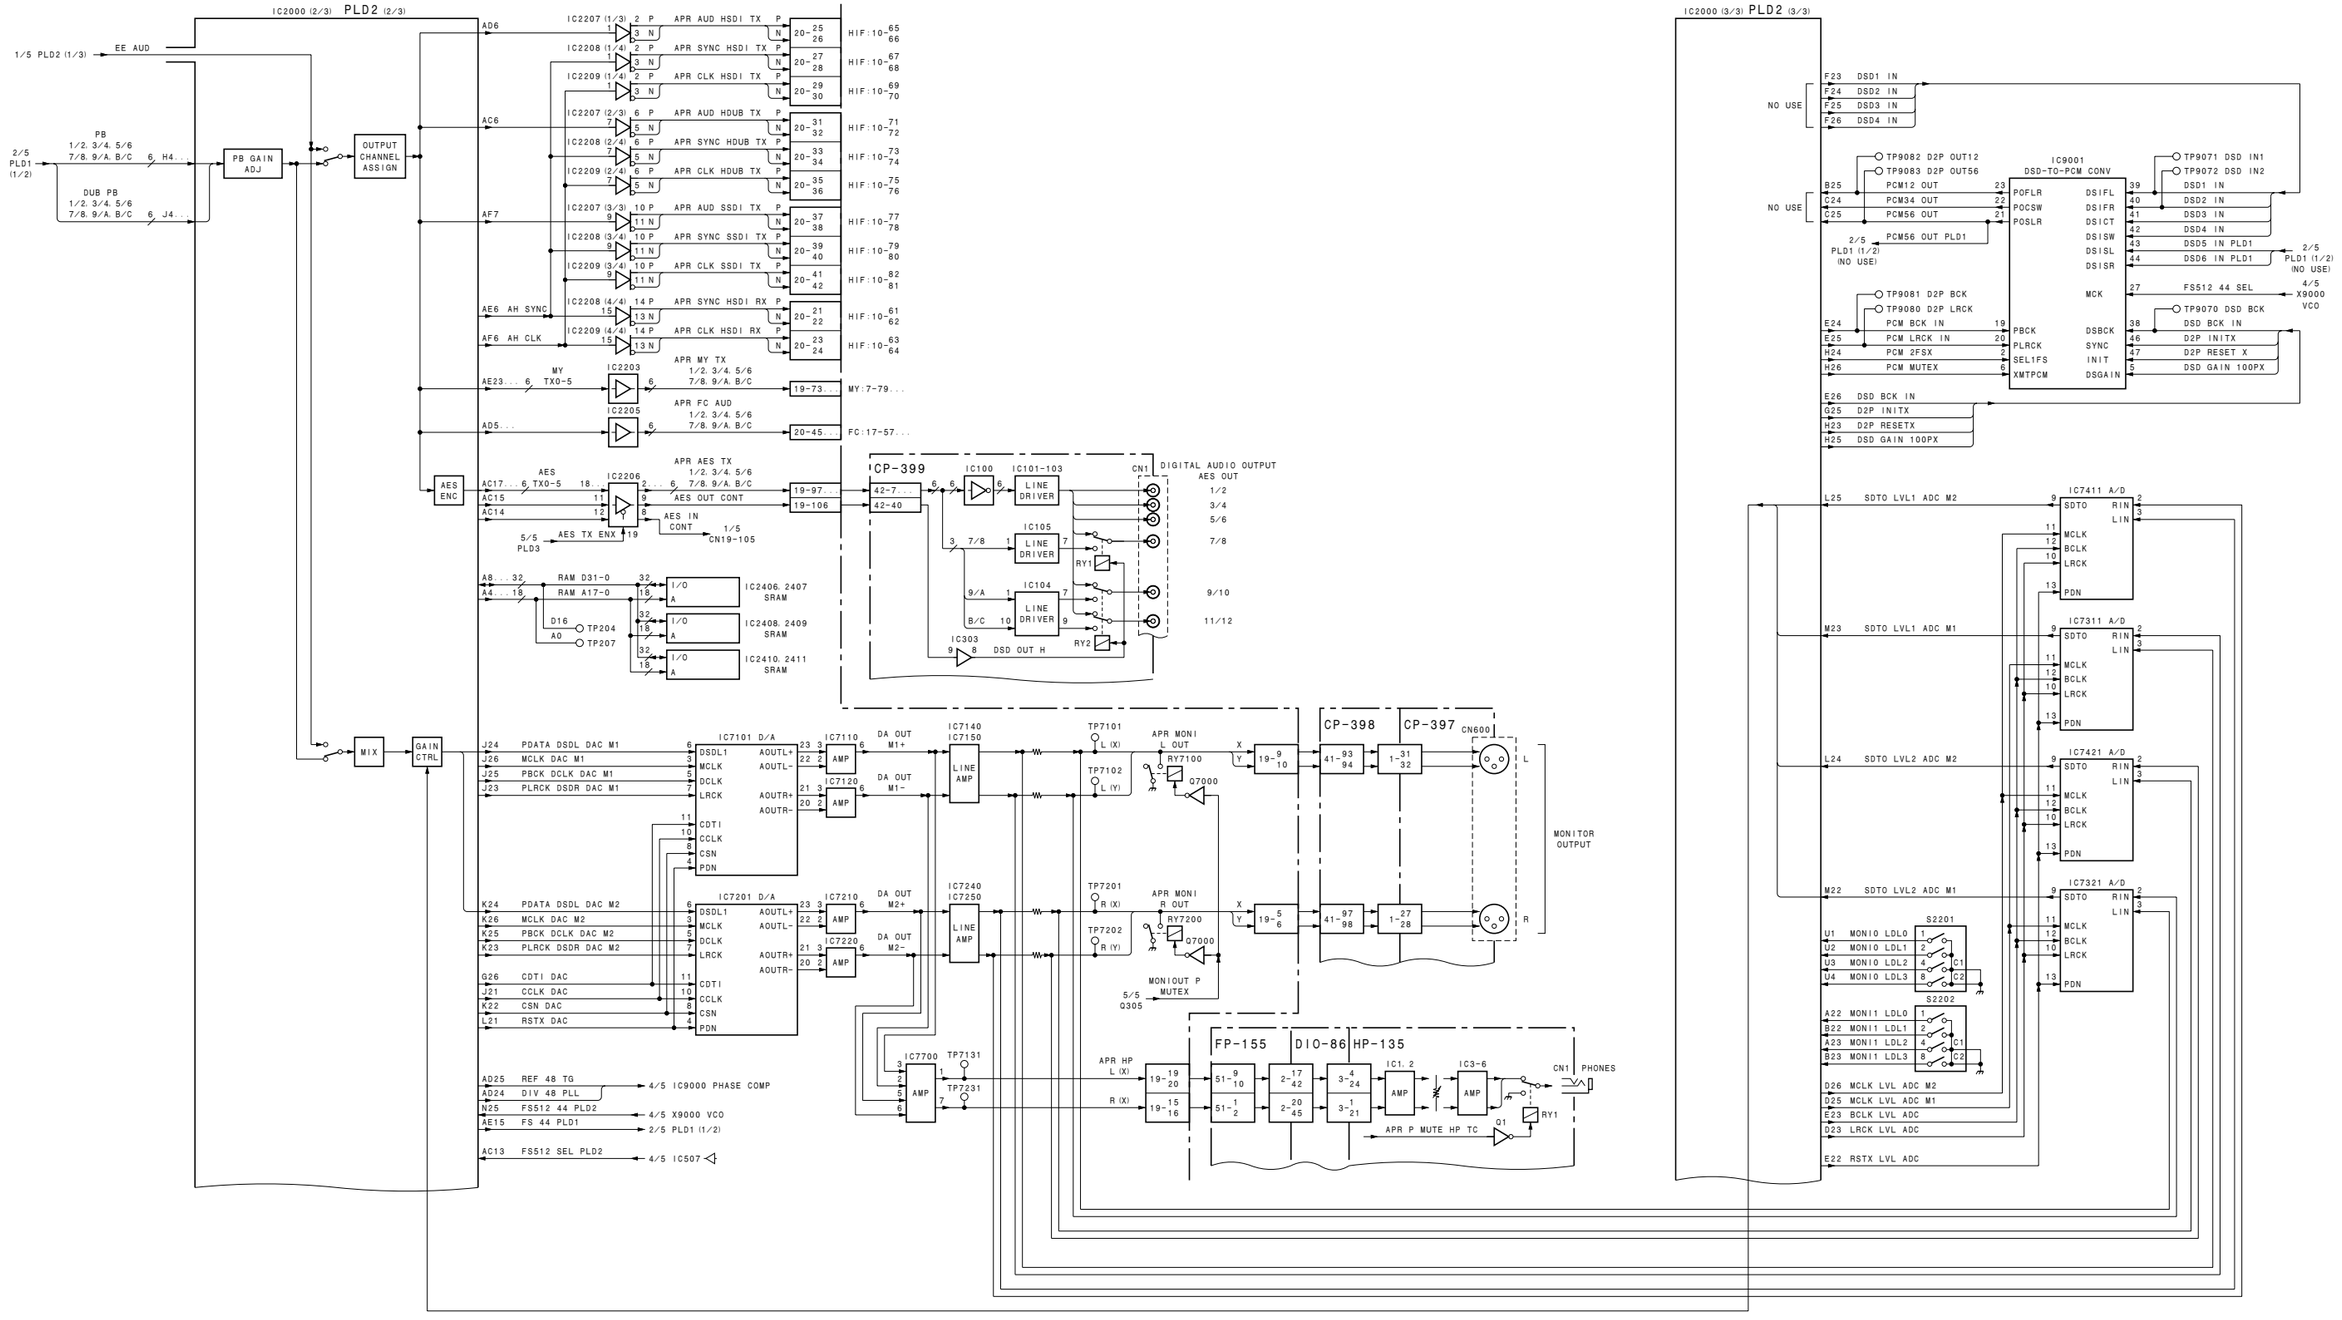
IC2000 (2/3) PLD2 (2/3)
1/5 PLD2 (1/3)
EE AUD
2/5 PLD1 (1/2)
PB 1/2, 3/4, 5/6 7/8, 9/A, B/C 6 H4...
DUB PB 1/2, 3/4, 5/6 7/8, 9/A, B/C 6 J4...
PB GAIN ADJ
OUTPUT CHANNEL ASSIGN
AD6
AC6
AF7
AE6 AH SYNC
AF6 AH CLK
AE23... 6
AD5...
AC17... 6
AC15
AC14
AES ENC
IC2207 (1/3) 2 P APR AUD HSDI TX P
IC2208 (1/4) 2 P APR SYNC HSDI TX P
IC2209 (1/4) 2 P APR CLK HSDI TX P
IC2207 (2/3) 6 P APR AUD HDUB TX P
IC2208 (2/4) 6 P APR SYNC HDUB TX P
IC2209 (2/4) 6 P APR CLK HDUB TX P
IC2207 (3/3) 10 P APR AUD SSDI TX P
IC2208 (3/4) 10 P APR SYNC SSDI TX P
IC2209 (3/4) 10 P APR CLK SSDI TX P
IC2208 (4/4) 14 P APR SYNC HSDI RX P
IC2209 (4/4) 14 P APR CLK HSDI RX P
HIF:10-65 66
HIF:10-67 68
HIF:10-69 70
HIF:10-71 72
HIF:10-73 74
HIF:10-75 76
HIF:10-77 78
HIF:10-79 80
HIF:10-82 81
HIF:10-61 62
HIF:10-63 64
IC2203 APR MY TX 1/2, 3/4, 5/6 7/8, 9/A, B/C
MY TX0-5
MY:7-79...
IC2205 APR FC AUD 1/2, 3/4, 5/6 7/8, 9/A, B/C
FC:17-57...
IC2206 APR AES TX 1/2, 3/4, 5/6 7/8, 9/A, B/C
AES TX0-5
AES OUT CONT
AES IN CONT
AES TX ENX
5/5 PLD3
1/5 CN19-105
CP-399
IC100
IC101-103 LINE DRIVER
IC105 LINE DRIVER
IC104 LINE DRIVER
IC303 DSD OUT H
RY1
RY2
CN1 DIGITAL AUDIO OUTPUT AES OUT 1/2 3/4 5/6 7/8 9/10 11/12
A8...32
A4...18
RAM D31-0
RAM A17-0
D16
A0
TP204
TP207
I/O A
IC2406, 2407 SRAM
IC2408, 2409 SRAM
IC2410, 2411 SRAM
MIX
GAIN CTRL
IC7101 D/A
IC7201 D/A
DSDL1
MCLK
DCLK
LRCK
CDTI
CCLK
CSN
PDN
AOUTL+
AOUTL-
AOUTR+
AOUTR-
J24 PDATA DSDL DAC M1
J26 MCLK DAC M1
J25 PBCK DCLK DAC M1
J23 PLRCK DSDR DAC M1
K24 PDATA DSDL DAC M2
K26 MCLK DAC M2
K25 PBCK DCLK DAC M2
K23 PLRCK DSDR DAC M2
G26 CDTI DAC
J21 CCLK DAC
K22 CSN DAC
L21 RSTX DAC
IC7110 IC7120 IC7210 IC7220 AMP
DA OUT M1+
DA OUT M1-
DA OUT M2+
DA OUT M2-
IC7140 IC7150 IC7240 IC7250 LINE AMP
TP7101 L (X)
TP7102 L (Y)
TP7201 R (X)
TP7202 R (Y)
APR MONI L OUT
APR MONI R OUT
RY7100
RY7200
Q7000
MONIOUT P MUTEX
5/5 Q305
CP-398
CP-397
CN600
MONITOR OUTPUT
L
R
IC7700 AMP
TP7131
TP7231
APR HP L (X)
R (X)
FP-155
DIO-86
HP-135
IC1, 2 AMP
IC3-6 AMP
CN1 PHONES
APR P MUTE HP TC
Q1
RY1
AD25 REF 48 TG
AD24 DIV 48 PLL
N25 FS512 44 PLD2
AE15 FS 44 PLD1
AC13 FS512 SEL PLD2
4/5 IC9000 PHASE COMP
4/5 X9000 VCO
2/5 PLD1 (1/2)
4/5 IC507
IC2000 (3/3) PLD2 (3/3)
NO USE
F23 DSD1 IN
F24 DSD2 IN
F25 DSD3 IN
F26 DSD4 IN
IC9001 DSD-TO-PCM CONV
TP9082 D2P OUT12
TP9083 D2P OUT56
PCM12 OUT
PCM34 OUT
PCM56 OUT
PCM56 OUT PLD1
2/5 PLD1 (1/2) (NO USE)
TP9081 D2P BCK
TP9080 D2P LRCK
PCM BCK IN
PCM LRCK IN
PCM 2FSX
PCM MUTEX
E26 DSD BCK IN
G25 D2P INITX
H23 D2P RESETX
H25 DSD GAIN 100PX
POFLR
POCSW
POSLR
PBCK
PLRCK
SEL1FS
XMTPCM
DSIFL
DSIFR
DSICT
DSISW
DSISL
DSISR
MCK
DSBCK
SYNC
INIT
DSGAIN
TP9071 DSD IN1
TP9072 DSD IN2
DSD1 IN
DSD2 IN
DSD3 IN
DSD4 IN
DSD5 IN PLD1
DSD6 IN PLD1
2/5 PLD1 (1/2) (NO USE)
FS512 44 SEL
4/5 X9000 VCO
TP9070 DSD BCK
DSD BCK IN
D2P INITX
D2P RESET X
DSD GAIN 100PX
L25 SDTO LVL1 ADC M2
M23 SDTO LVL1 ADC M1
L24 SDTO LVL2 ADC M2
M22 SDTO LVL2 ADC M1
IC7411 A/D
IC7311 A/D
IC7421 A/D
IC7321 A/D
SDTO
RIN
LIN
MCLK
BCLK
LRCK
PDN
S2201
S2202
U1 MONIO LDL0
U2 MONIO LDL1
U3 MONIO LDL2
U4 MONIO LDL3
A22 MONI1 LDL0
B22 MONI1 LDL1
A23 MONI1 LDL2
B23 MONI1 LDL3
D26 MCLK LVL ADC M2
D25 MCLK LVL ADC M1
E23 BCLK LVL ADC
D23 LRCK LVL ADC
E22 RSTX LVL ADC

APR-81 (3/5)

APR-81 (4/5)

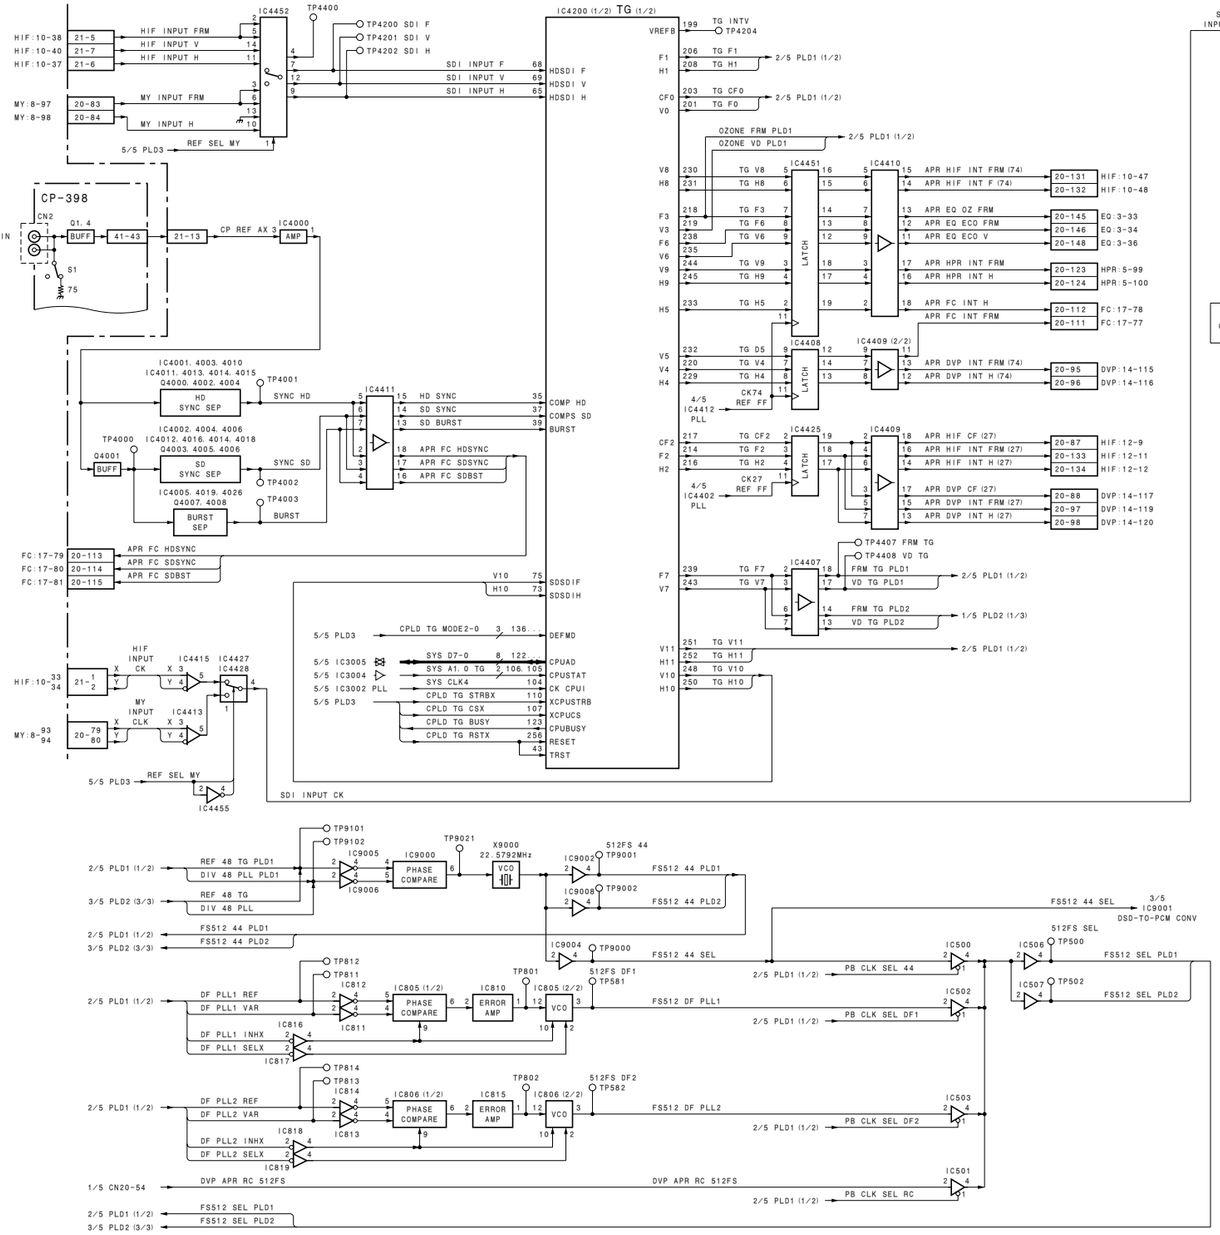

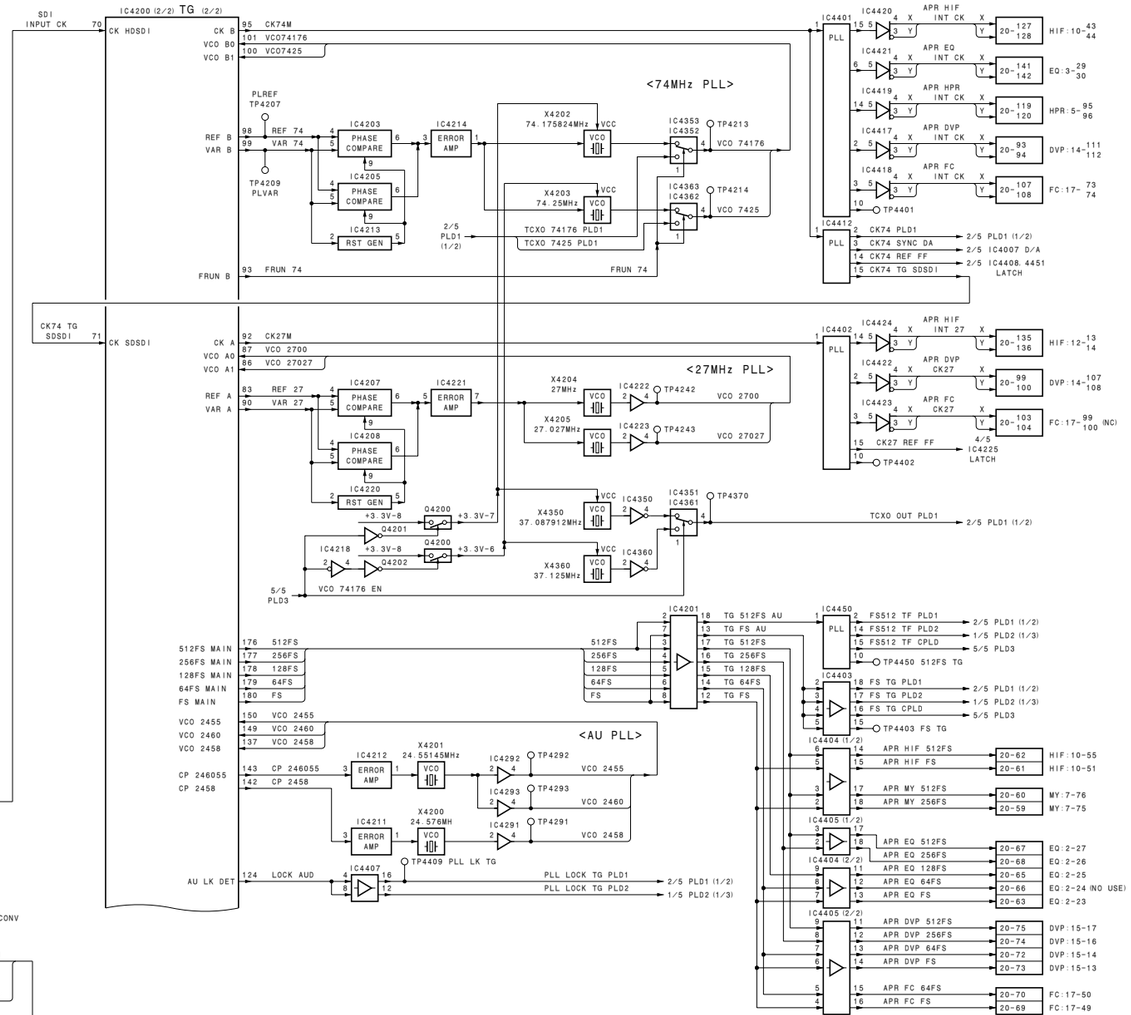

3-11
APR-81 (4/5)

APR-81 (5/5)

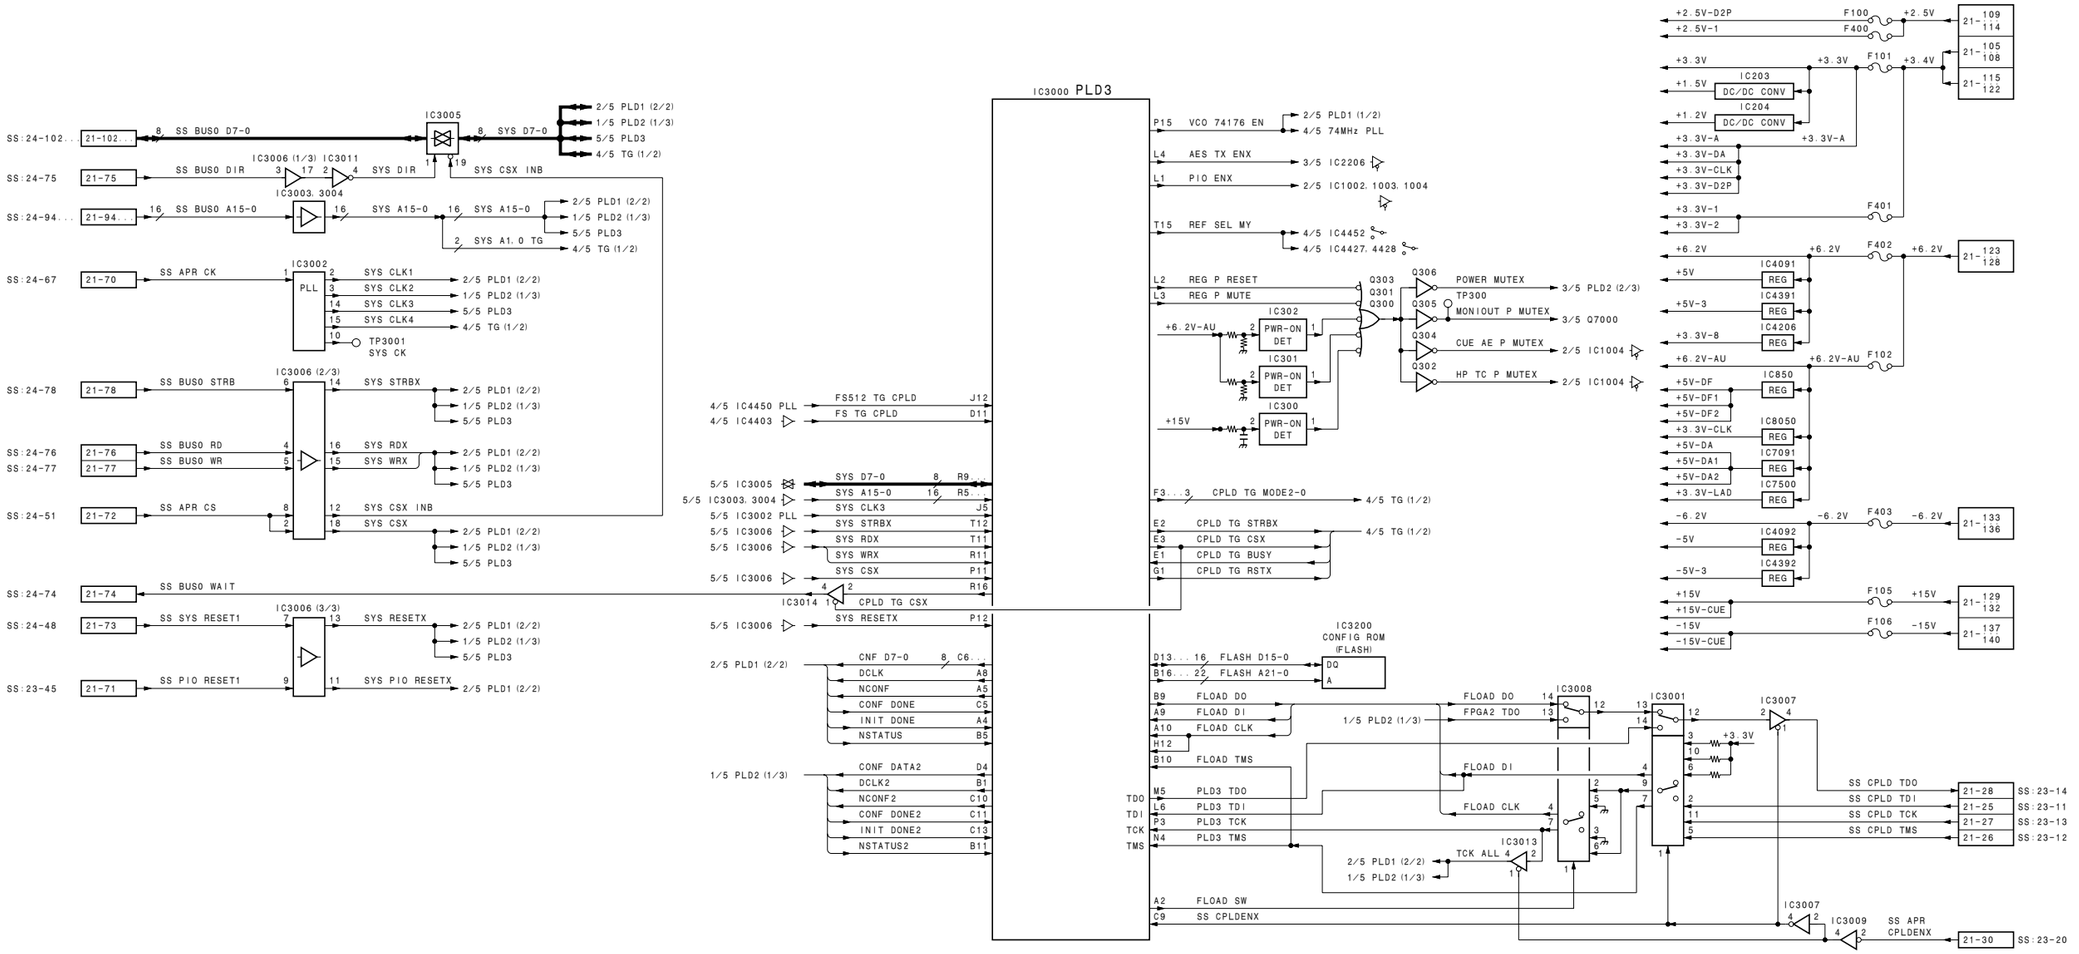

APR-81 (5/5)

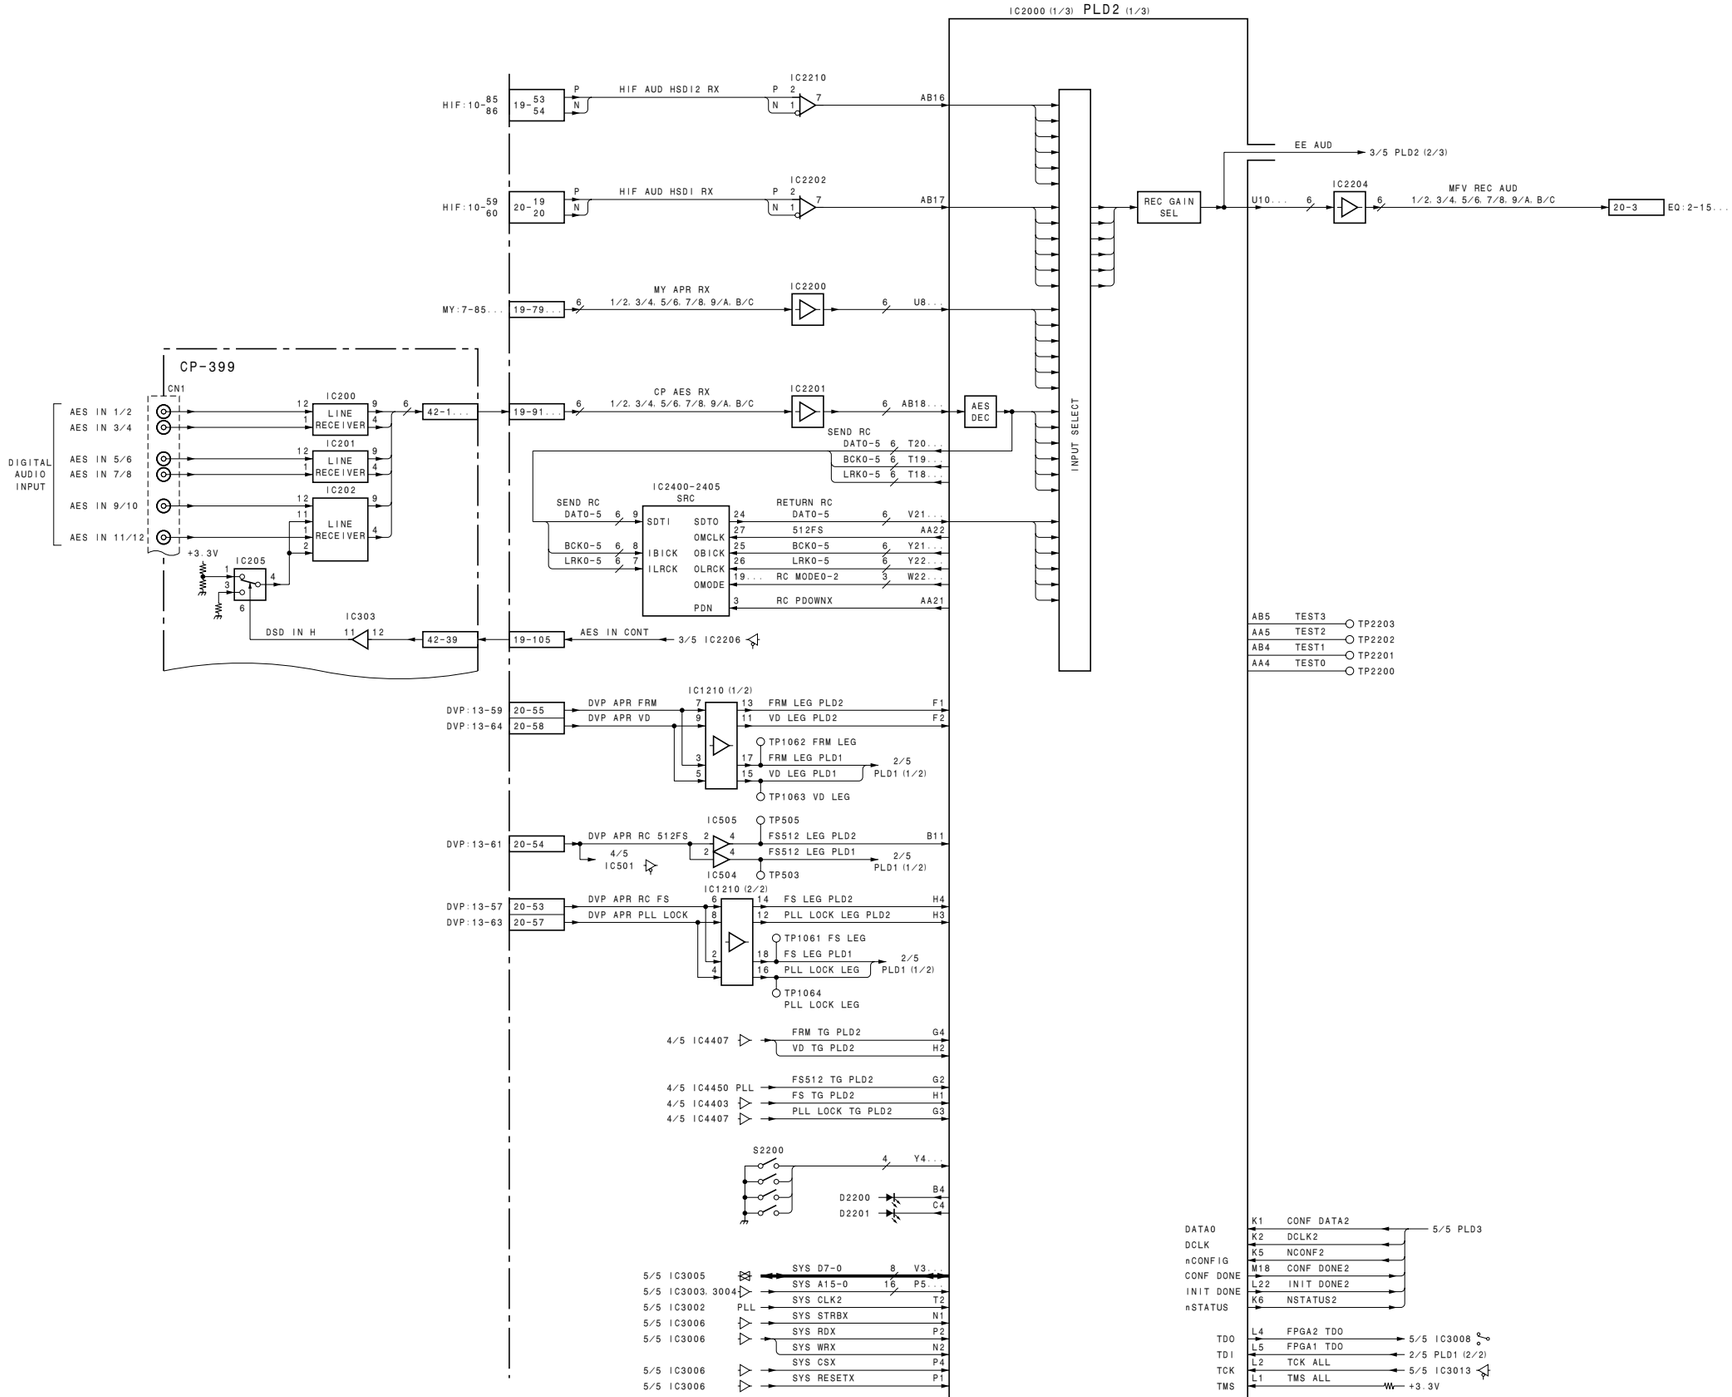
IC2000 (1/3) PLD2 (1/3)
CP-399
CN1
DIGITAL AUDIO INPUT
AES IN 1/2
AES IN 3/4
AES IN 5/6
AES IN 7/8
AES IN 9/10
AES IN 11/12
IC200
IC201
IC202
LINE RECEIVER
+3.3V
IC205
IC303
DSD IN H
42-1...
42-39
HIF:10-85 86
HIF:10-59 60
MY:7-85...
DVP:13-59
DVP:13-64
DVP:13-61
DVP:13-57
DVP:13-63
19-53 54
20-19 20
19-79...
19-91...
19-105
20-55
20-58
20-54
20-53
20-57
P
N
HIF AUD HSDI2 RX
HIF AUD HSDI RX
MY APR RX
1/2, 3/4, 5/6, 7/8, 9/A, B/C
CP AES RX
AES IN CONT
3/5 IC2206
IC2210
IC2202
IC2200
IC2201
AB16
AB17
U8...
AB18...
AES DEC
INPUT SELECT
SEND RC
DAT0-5
BCK0-5
LRK0-5
T20...
T19...
T18...
IC2400-2405
SRC
SDTI
IBICK
ILRCK
SDTO
OMCLK
OBICK
OLRCK
OMODE
PDN
RETURN RC
512FS
RC MODE0-2
RC PDOWNX
V21...
AA22
Y21...
Y22...
W22...
AA21
IC1210 (1/2)
DVP APR FRM
DVP APR VD
FRM LEG PLD2
VD LEG PLD2
F1
F2
TP1062 FRM LEG
FRM LEG PLD1
VD LEG PLD1
2/5 PLD1 (1/2)
TP1063 VD LEG
IC505
TP505
IC504
TP503
DVP APR RC 512FS
FS512 LEG PLD2
FS512 LEG PLD1
B11
4/5 IC501
IC1210 (2/2)
DVP APR RC FS
DVP APR PLL LOCK
FS LEG PLD2
PLL LOCK LEG PLD2
H4
H3
TP1061 FS LEG
FS LEG PLD1
PLL LOCK LEG
TP1064 PLL LOCK LEG
4/5 IC4407
FRM TG PLD2
VD TG PLD2
G4
H2
4/5 IC4450 PLL
FS512 TG PLD2
FS TG PLD2
PLL LOCK TG PLD2
G2
H1
G3
4/5 IC4403
S2200
D2200
D2201
B4
C4
Y4...
5/5 IC3005
5/5 IC3003, 3004
5/5 IC3002
5/5 IC3006
SYS D7-0
SYS A15-0
SYS CLK2
SYS STRBX
SYS RDX
SYS WRX
SYS CSX
SYS RESETX
V3
P5...
T2
N1
P2
N2
P4
P1
PLL
REC GAIN SEL
EE AUD
3/5 PLD2 (2/3)
IC2204
MFV REC AUD
1/2, 3/4, 5/6, 7/8, 9/A, B/C
U10...
20-3
EQ:2-15...
AB5 TEST3 TP2203
AA5 TEST2 TP2202
AB4 TEST1 TP2201
AA4 TEST0 TP2200
DATA0
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
K1 CONF DATA2
K2 DCLK2
K5 NCONF2
M18 CONF DONE2
L22 INIT DONE2
K6 NSTATUS2
5/5 PLD3
TDO
TDI
TCK
TMS
L4 FPGA2 TDO
L5 FPGA1 TDO
L2 TCK ALL
L1 TMS ALL
5/5 IC3008
2/5 PLD1 (2/2)
5/5 IC3013
+3.3V

APR-91 (1/5)

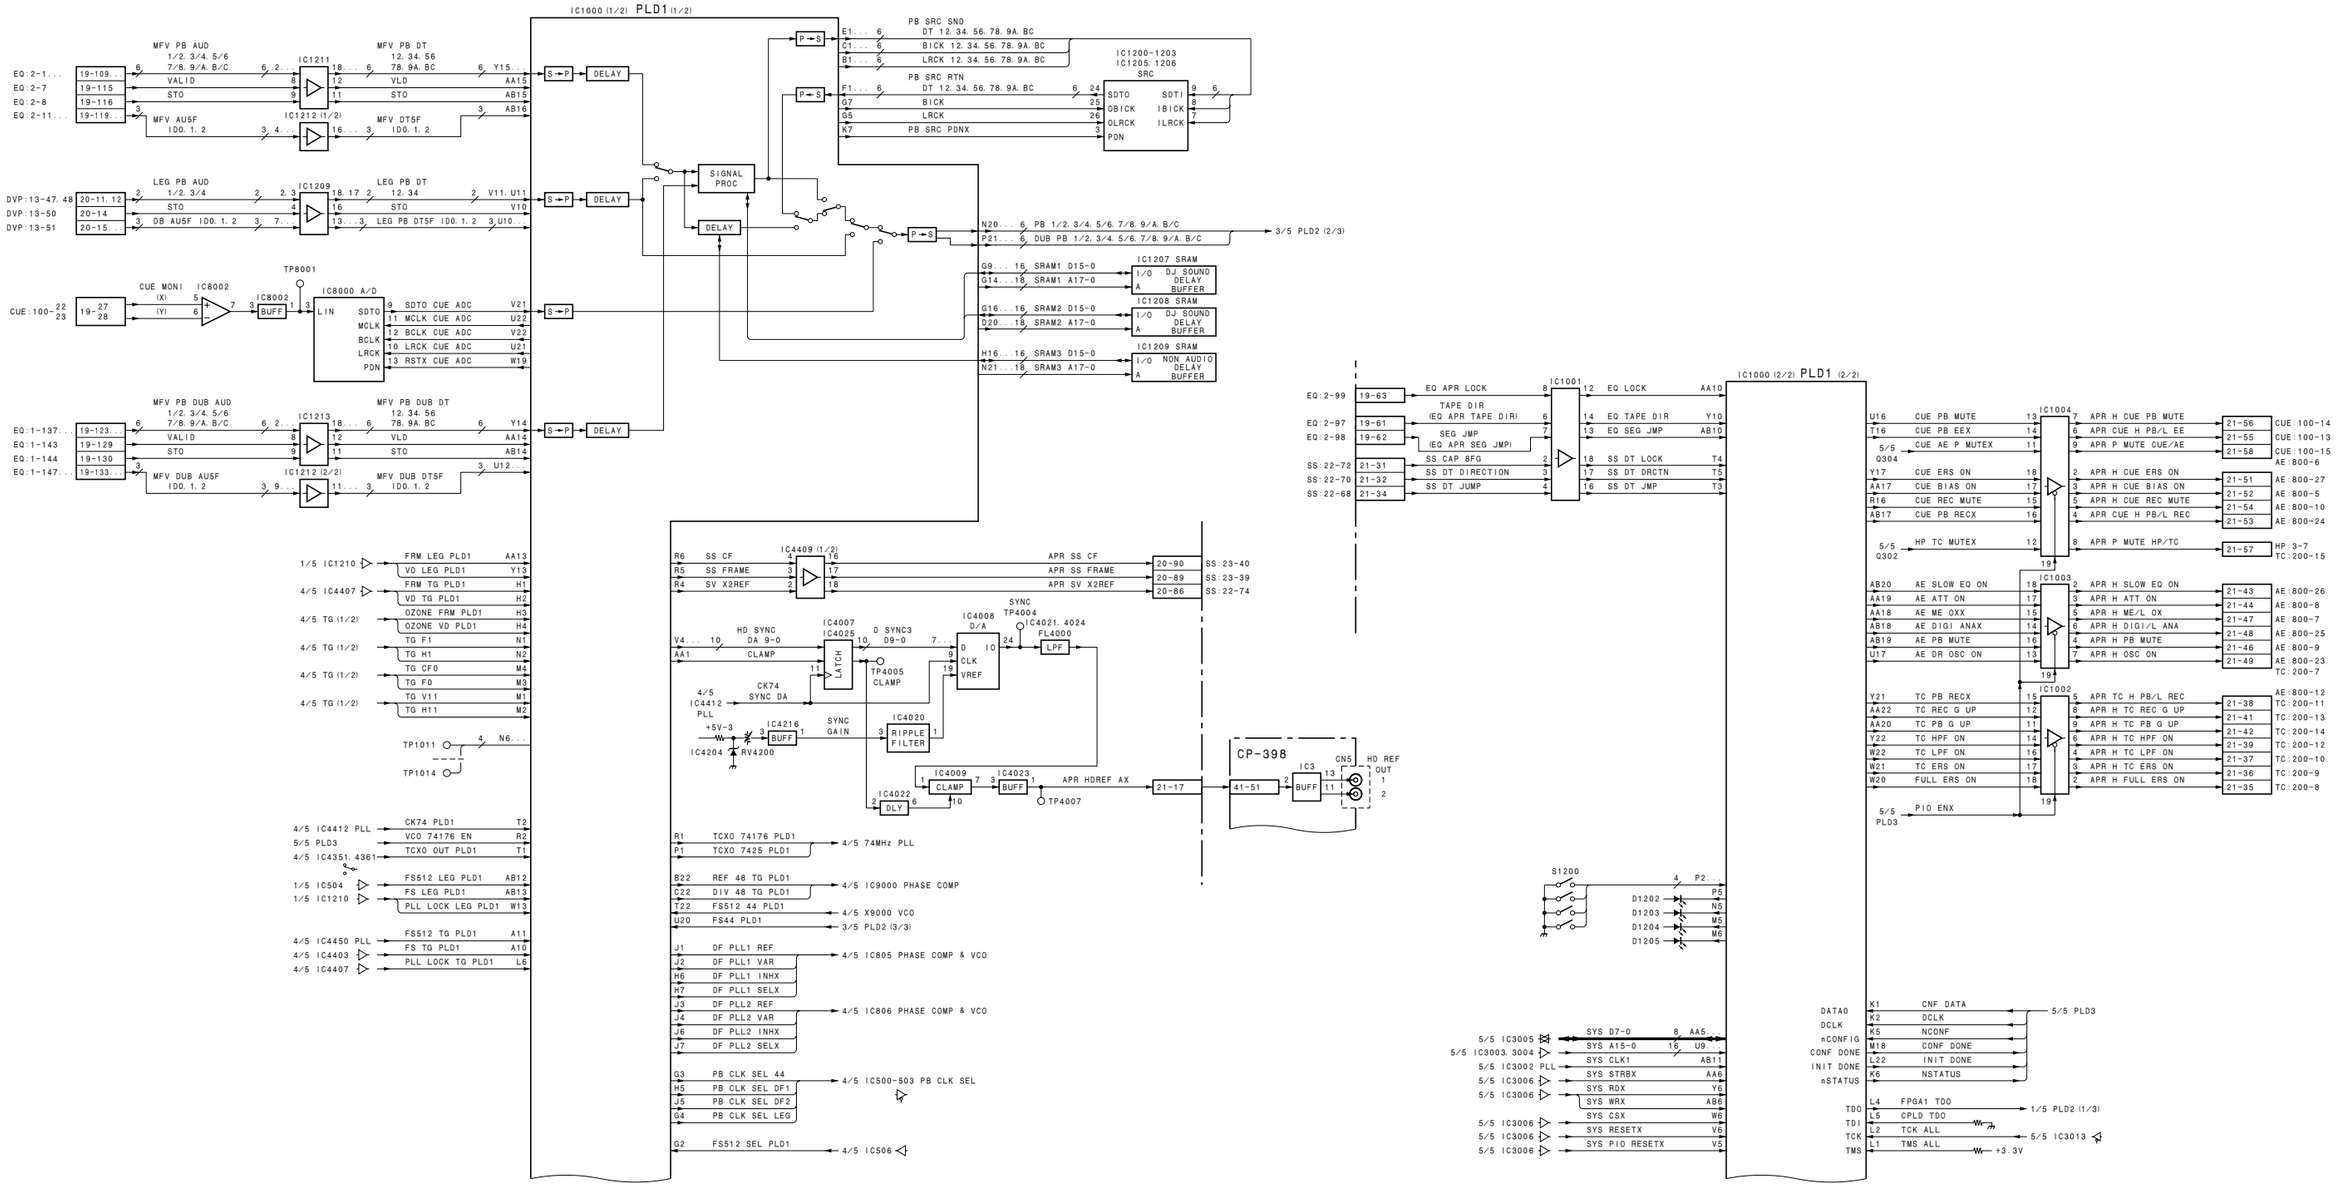
IC1000 (1/2) PLD1 (1/2)
MFV PB AUD 1/2. 3/4. 5/6 7/8. 9/A. B/C
MFV PB DT 12. 34. 56 78. 9A. BC
IC1211
IC1212 (1/2)
MFV AU5F ID0. 1. 2
MFV DT5F ID0. 1. 2
LEG PB AUD 1/2. 3/4
LEG PB DT 12. 34
IC1209
DB AU5F ID0. 1. 2
LEG PB DT5F ID0. 1. 2
CUE MON1 (X) (Y)
IC8002
TP8001
IC8000 A/D
SDTO CUE ADC
MCLK CUE ADC
BCLK CUE ADC
LRCK CUE ADC
RSTX CUE ADC
MFV PB DUB AUD 1/2. 3/4. 5/6 7/8. 9/A. B/C
MFV PB DUB DT 12. 34. 56 78. 9A. BC
IC1213
IC1212 (2/2)
MFV DUB AU5F ID0. 1. 2
MFV DUB DT5F ID0. 1. 2
SIGNAL PROC
DELAY
PB SRC SND DT 12. 34. 56. 78. 9A. BC
BICK 12. 34. 56. 78. 9A. BC
LRCK 12. 34. 56. 78. 9A. BC
PB SRC RTN DT 12. 34. 56. 78. 9A. BC
BICK
LRCK
PB SRC PDNX
IC1200-1203 IC1205. 1206 SRC
SDTO
SDTI
OBICK
IBICK
OLRCK
ILRCK
PDN
PB 1/2. 3/4. 5/6. 7/8. 9/A. B/C
DUB PB 1/2. 3/4. 5/6. 7/8. 9/A. B/C
3/5 PLD2 (2/3)
SRAM1 D15-0
SRAM1 A17-0
SRAM2 D15-0
SRAM2 A17-0
SRAM3 D15-0
SRAM3 A17-0
IC1207 SRAM
IC1208 SRAM
IC1209 SRAM
DJ SOUND DELAY BUFFER
NON AUDIO DELAY BUFFER
FRM LEG PLD1
VD LEG PLD1
FRM TG PLD1
VD TG PLD1
OZONE FRM PLD1
OZONE VD PLD1
TG F1
TG H1
TG CF0
TG F0
TG V11
TG H11
TP1011
TP1014
CK74 PLD1
VCO 74176 EN
TCXO OUT PLD1
FS512 LEG PLD1
FS LEG PLD1
PLL LOCK LEG PLD1
FS512 TG PLD1
FS TG PLD1
PLL LOCK TG PLD1
IC4409 (1/2)
SS CF
SS FRAME
SV X2REF
APR SS CF
APR SS FRAME
APR SV X2REF
HD SYNC DA 9-0
CLAMP
IC4007 IC4025
LATCH
D SYNC3 D9-0
TP4005 CLAMP
IC4008 D/A
SYNC TP4004
IC4021. 4024 FL4000
LPF
CK74 SYNC DA
IC4412 PLL
+5V-3
IC4216
RV4200
SYNC GAIN
IC4020
RIPPLE FILTER
IC4009
IC4023
IC4022
DLY
APR HDREF AX
TP4007
CP-398
IC3
HD REF OUT
TCXO 74176 PLD1
TCXO 7425 PLD1
4/5 74MHz PLL
REF 48 TG PLD1
DIV 48 TG PLD1
FS512 44 PLD1
FS44 PLD1
4/5 IC9000 PHASE COMP
4/5 X9000 VCO
3/5 PLD2 (3/3)
DF PLL1 REF
DF PLL1 VAR
DF PLL1 INHX
DF PLL1 SELX
DF PLL2 REF
DF PLL2 VAR
DF PLL2 INHX
DF PLL2 SELX
4/5 IC805 PHASE COMP & VCO
4/5 IC806 PHASE COMP & VCO
PB CLK SEL 44
PB CLK SEL DF1
PB CLK SEL DF2
PB CLK SEL LEG
4/5 IC500-503 PB CLK SEL
FS512 SEL PLD1
4/5 IC506
IC1000 (2/2) PLD1 (2/2)
EQ APR LOCK
TAPE DIR (EQ APR TAPE DIR)
SEG JMP (EQ APR SEG JMP)
SS CAP 8FG
SS DT DIRECTION
SS DT JUMP
IC1001
EQ LOCK
EQ TAPE DIR
EQ SEG JMP
SS DT LOCK
SS DT DRCTN
SS DT JMP
IC1004
IC1003
IC1002
CUE PB MUTE
CUE PB EEX
CUE AE P MUTEX
CUE ERS ON
CUE BIAS ON
CUE REC MUTE
CUE PB RECX
HP TC MUTEX
AE SLOW EQ ON
AE ATT ON
AE ME OXX
AE DIGI ANAX
AE PB MUTE
AE DR OSC ON
TC PB RECX
TC REC G UP
TC PB G UP
TC HPF ON
TC LPF ON
TC ERS ON
FULL ERS ON
PIO ENX
APR H CUE PB MUTE
APR CUE H PB/L EE
APR P MUTE CUE/AE
APR H CUE ERS ON
APR H CUE BIAS ON
APR H CUE REC MUTE
APR CUE H PB/L REC
APR P MUTE HP/TC
APR H SLOW EQ ON
APR H ATT ON
APR H ME/L OX
APR H DIGI/L ANA
APR H PB MUTE
APR H OSC ON
APR TC H PB/L REC
APR H TC REC G UP
APR H TC PB G UP
APR H TC HPF ON
APR H TC LPF ON
APR H TC ERS ON
APR H FULL ERS ON
S1200
SYS D7-0
SYS A15-0
SYS CLK1
SYS STRBX
SYS RDX
SYS WRX
SYS CSX
SYS RESETX
SYS PIO RESETX
DATA0
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
CNF DATA
NCONF
CONF DONE
INIT DONE
NSTATUS
FPGA1 TDO
CPLD TDO
TCK ALL
TMS ALL
+3.3V

APR-91 (2/5)

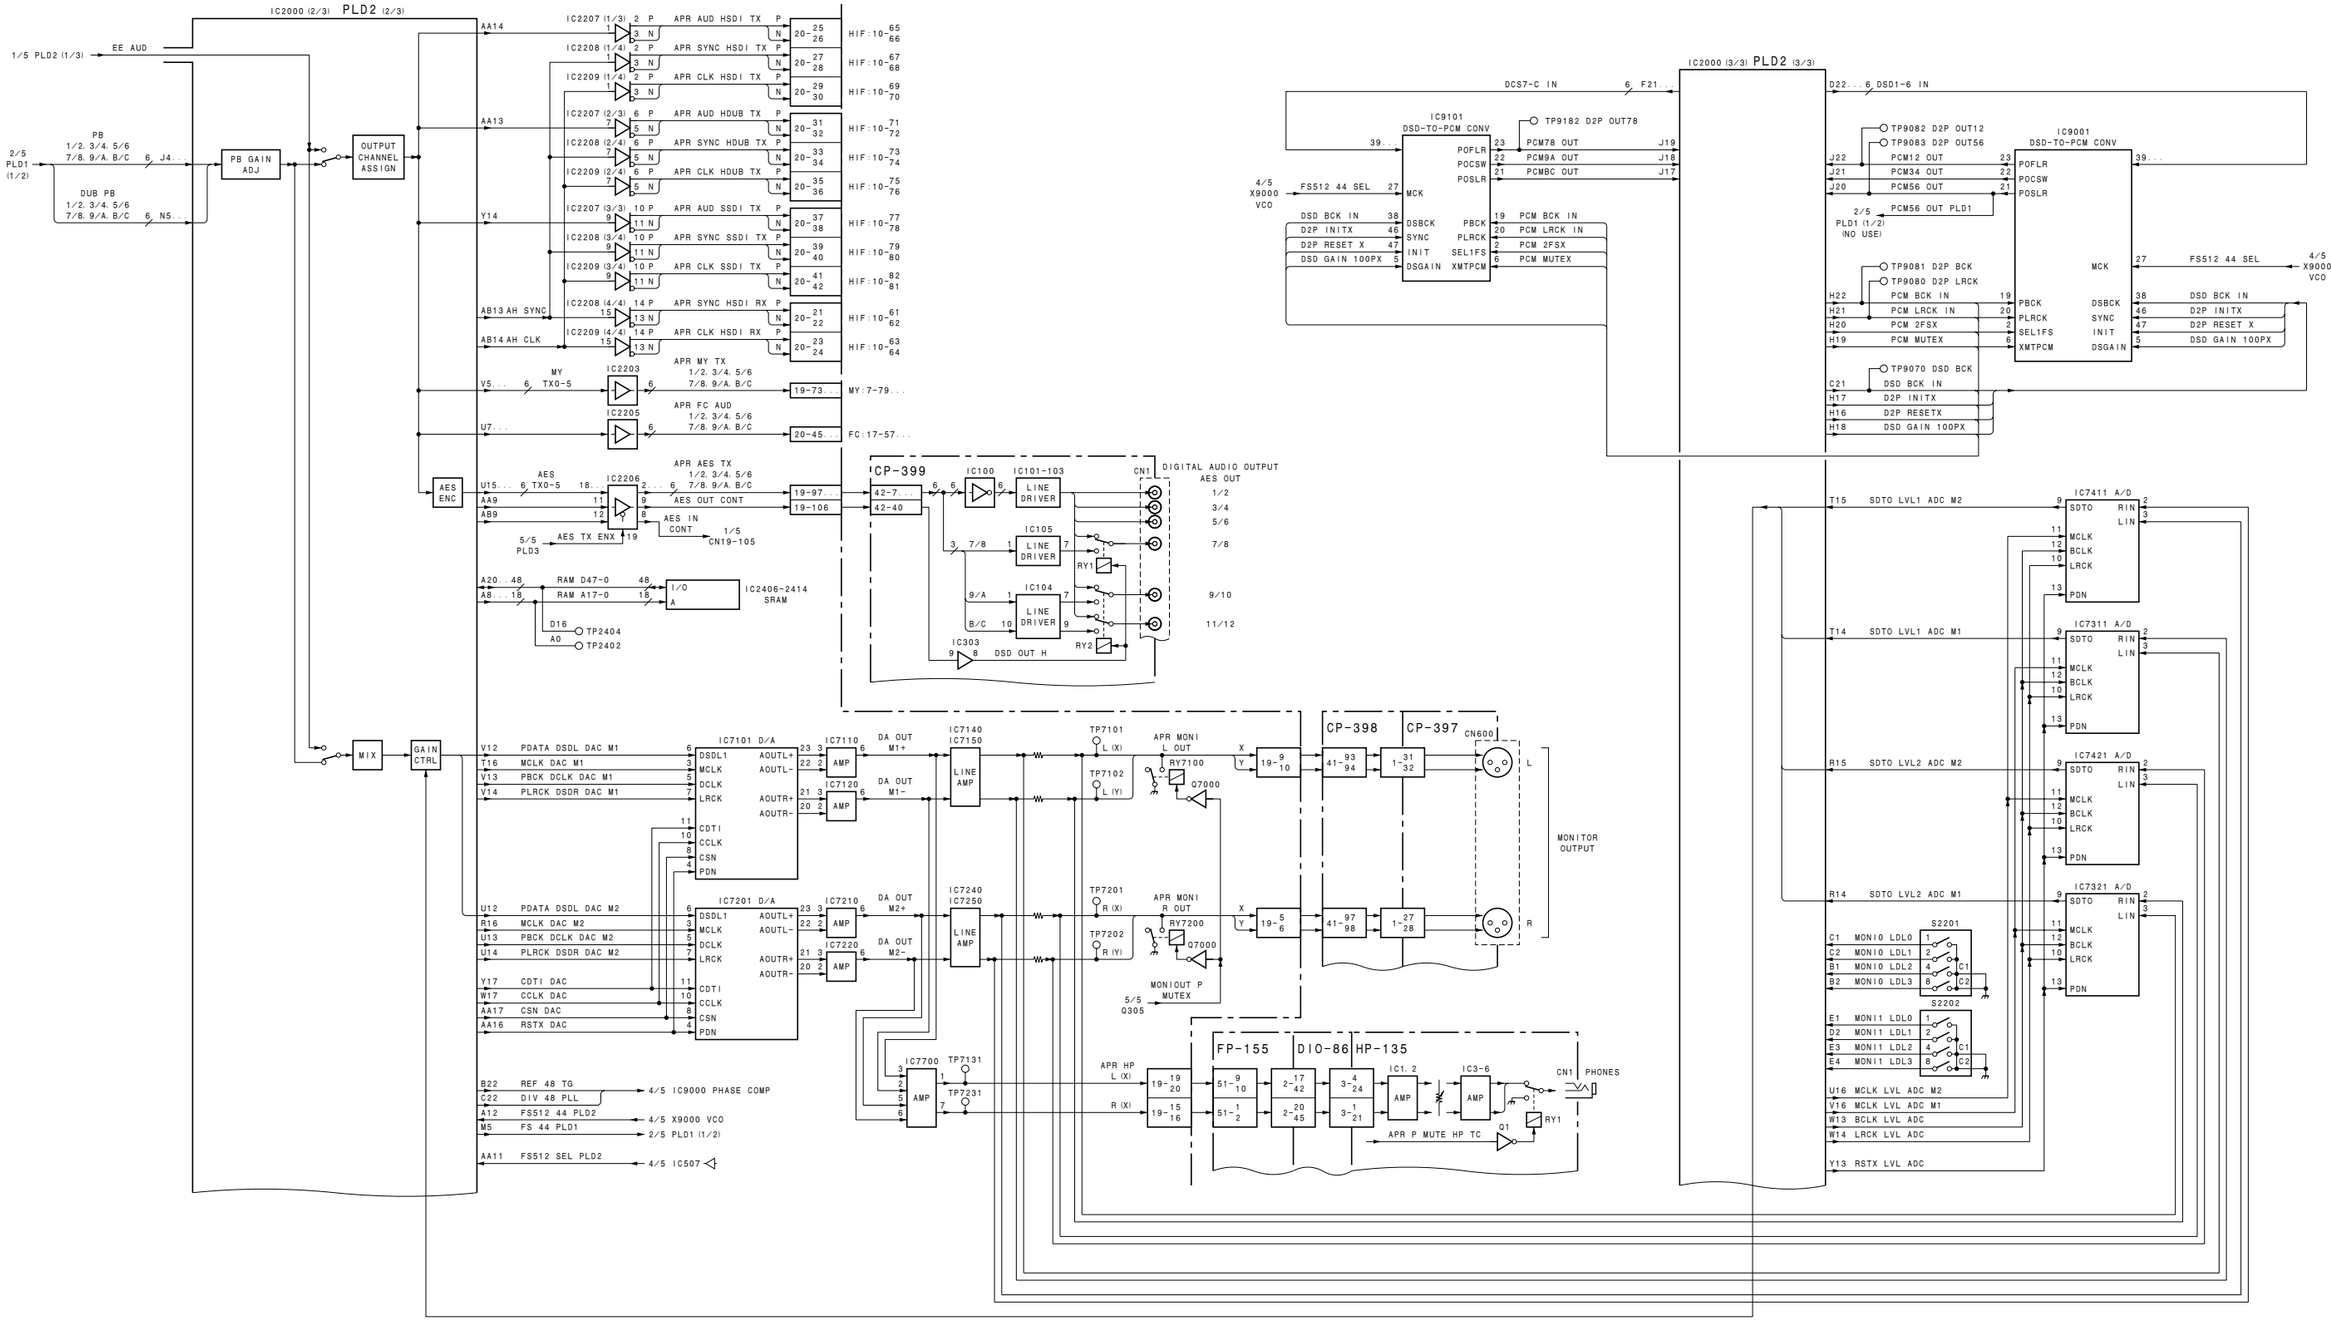
IC2000 (2/3) PLD2 (2/3)
EE AUD
1/5 PLD2 (1/3)
PB
1/2, 3/4, 5/6
7/8, 9/A, B/C
DUB PB
1/2, 3/4, 5/6
7/8, 9/A, B/C
2/5 PLD1 (1/2)
PB GAIN ADJ
OUTPUT CHANNEL ASSIGN
AA14
AA13
Y14
AB13 AH SYNC
AB14 AH CLK
IC2207 (1/3) APR AUD HSDI TX
IC2208 (1/4) APR SYNC HSDI TX
IC2209 (1/4) APR CLK HSDI TX
IC2207 (2/3) APR AUD HDUB TX
IC2208 (2/4) APR SYNC HDUB TX
IC2209 (2/4) APR CLK HDUB TX
IC2207 (3/3) APR AUD SSDI TX
IC2208 (3/4) APR SYNC SSDI TX
IC2209 (3/4) APR CLK SSDI TX
IC2208 (4/4) APR SYNC HSDI RX
IC2209 (4/4) APR CLK HSDI RX
HIF:10-65 66
HIF:10-67 68
HIF:10-69 70
HIF:10-71 72
HIF:10-73 74
HIF:10-75 76
HIF:10-77 78
HIF:10-79 80
HIF:10-82 81
HIF:10-61 62
HIF:10-63 64
MY TX0-5
IC2203
APR MY TX
1/2, 3/4, 5/6
7/8, 9/A, B/C
MY:7-79...
IC2205
APR FC AUD
FC:17-57...
AES ENC
AES TX0-5
IC2206
APR AES TX
AES OUT CONT
AES IN CONT
AES TX ENX
5/5 PLD3
1/5 CN19-105
RAM D47-0
RAM A17-0
I/O A
IC2406-2414 SRAM
D16
A0
TP2404
TP2402
CP-399
IC100
IC101-103
IC105
IC104
IC303
DSD OUT H
CN1
DIGITAL AUDIO OUTPUT
AES OUT
1/2
3/4
5/6
7/8
9/10
11/12
RY1
RY2
MIX
GAIN CTRL
IC7101 D/A
IC7201 D/A
PDATA DSDL DAC M1
MCLK DAC M1
PBCK DCLK DAC M1
PLRCK DSDR DAC M1
PDATA DSDL DAC M2
MCLK DAC M2
PBCK DCLK DAC M2
PLRCK DSDR DAC M2
CDTI DAC
CCLK DAC
CSN DAC
RSTX DAC
DSDL1
MCLK
DCLK
LRCK
CDTI
CCLK
CSN
PDN
AOUTL+
AOUTL-
AOUTR+
AOUTR-
IC7110
IC7120
IC7210
IC7220
AMP
DA OUT M1+
DA OUT M1-
DA OUT M2+
DA OUT M2-
IC7140 IC7150
IC7240 IC7250
LINE AMP
IC7700
TP7131
TP7231
REF 48 TG
DIV 48 PLL
FS512 44 PLD2
FS 44 PLD1
FS512 SEL PLD2
4/5 IC9000 PHASE COMP
4/5 X9000 VCO
2/5 PLD1 (1/2)
4/5 IC507
TP7101
TP7102
TP7201
TP7202
L (X)
L (Y)
R (X)
R (Y)
APR MONI L OUT
APR MONI R OUT
RY7100
RY7200
Q7000
MONIOUT P MUTEX
5/5 Q305
CP-398
CP-397
CN600
L
R
MONITOR OUTPUT
APR HP L (X)
R (X)
FP-155
DIO-86
HP-135
IC1, 2
IC3-6
CN1
PHONES
RY1
Q1
APR P MUTE HP TC
IC2000 (3/3) PLD2 (3/3)
DCS7-C IN
IC9101
DSD-TO-PCM CONV
FS512 44 SEL
DSD BCK IN
D2P INITX
D2P RESET X
DSD GAIN 100PX
POFLR
POCSW
POSLR
MCK
DSBCK
SYNC
INIT
DSGAIN
PBCK
PLRCK
SEL1FS
XMTPCM
PCM BCK IN
PCM LRCK IN
PCM 2FSX
PCM MUTEX
PCM78 OUT
PCM9A OUT
PCMBC OUT
TP9182 D2P OUT78
D22...6 DSD1-6 IN
TP9082 D2P OUT12
TP9083 D2P OUT56
PCM12 OUT
PCM34 OUT
PCM56 OUT
PCM56 OUT PLD1
2/5 PLD1 (1/2) (NO USE)
IC9001
DSD-TO-PCM CONV
4/5 X9000 VCO
TP9081 D2P BCK
TP9080 D2P LRCK
TP9070 DSD BCK
D2P INITX
D2P RESETX
DSD GAIN 100PX
T15 SDTO LVL1 ADC M2
T14 SDTO LVL1 ADC M1
R15 SDTO LVL2 ADC M2
R14 SDTO LVL2 ADC M1
IC7411 A/D
IC7311 A/D
IC7421 A/D
IC7321 A/D
SDTO
RIN
LIN
MCLK
BCLK
LRCK
PDN
S2201
S2202
MONI0 LDL0
MONI0 LDL1
MONI0 LDL2
MONI0 LDL3
MONI1 LDL0
MONI1 LDL1
MONI1 LDL2
MONI1 LDL3
U16 MCLK LVL ADC M2
V16 MCLK LVL ADC M1
W13 BCLK LVL ADC
W14 LRCK LVL ADC
Y13 RSTX LVL ADC

APR-91 (4/5)

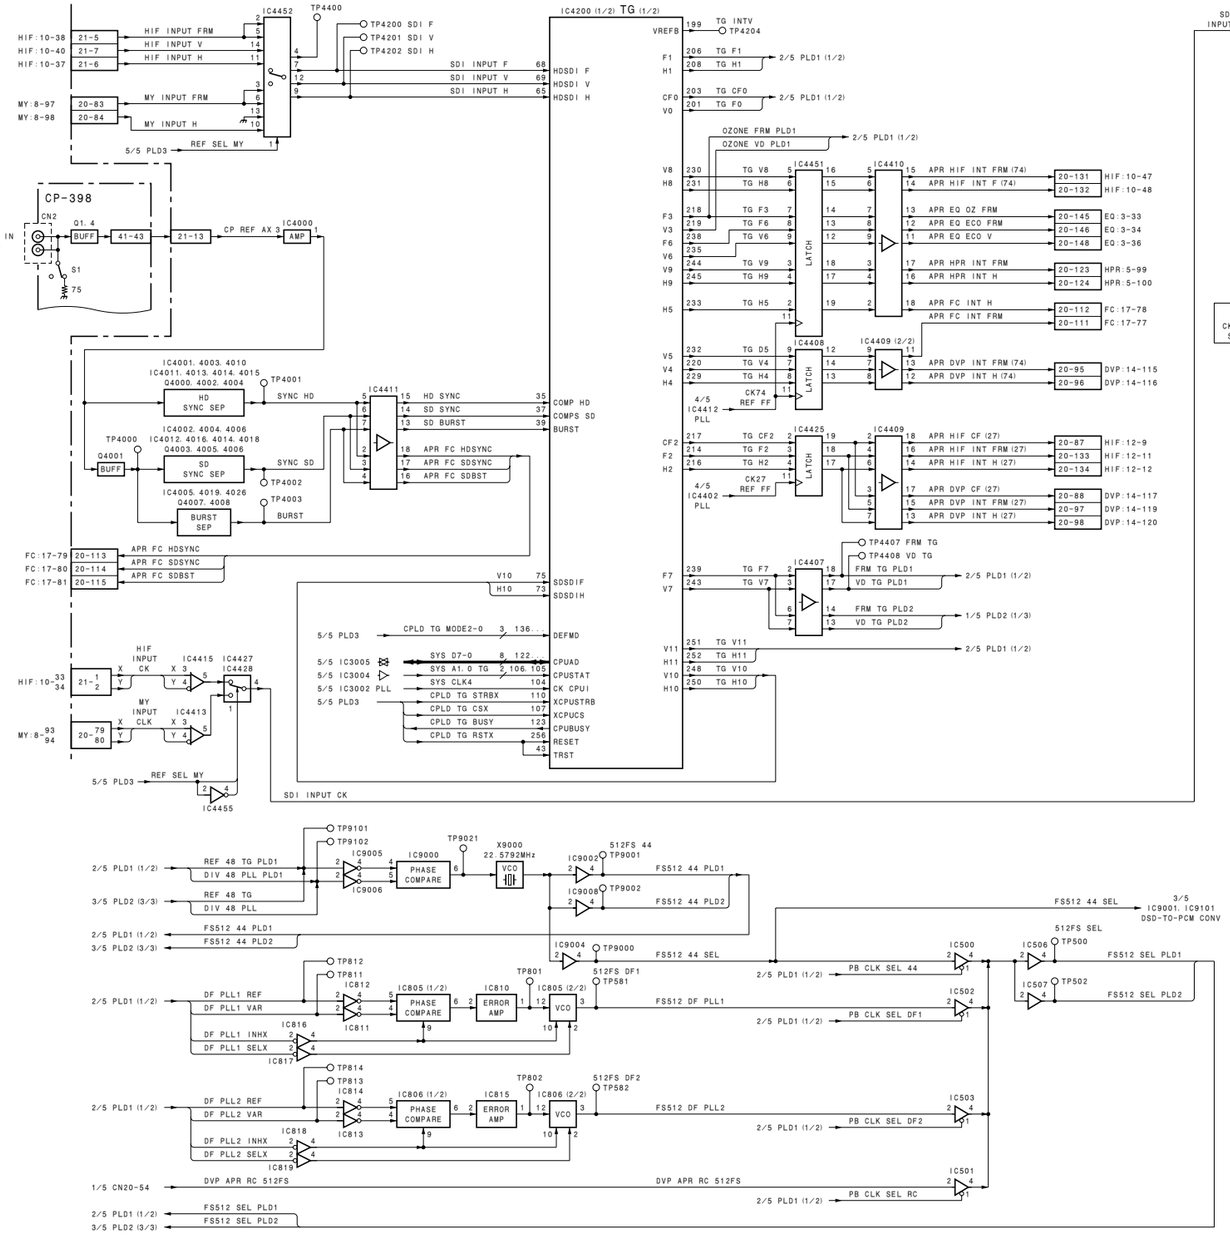

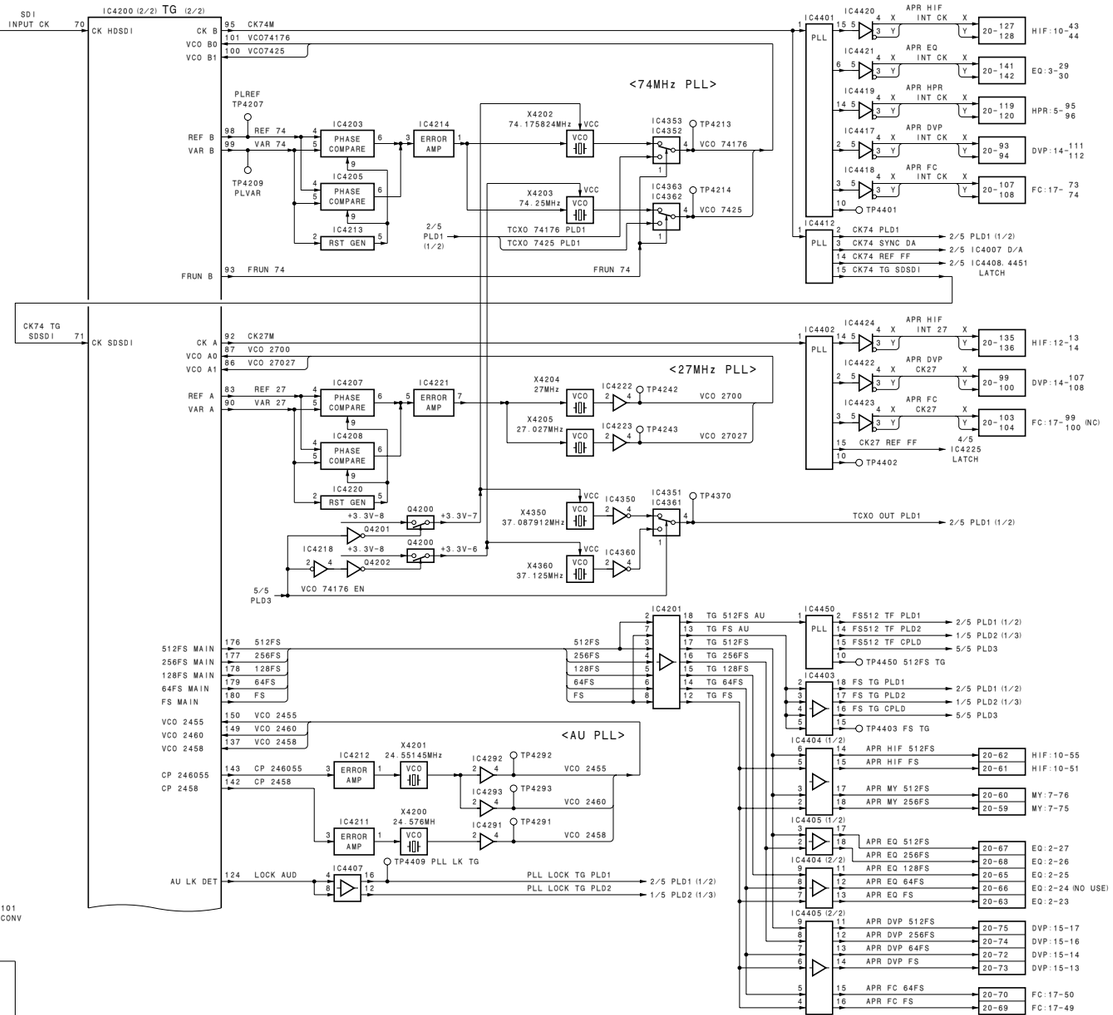

APR-91 (4/5)

3-16

APR-91 (5/5)

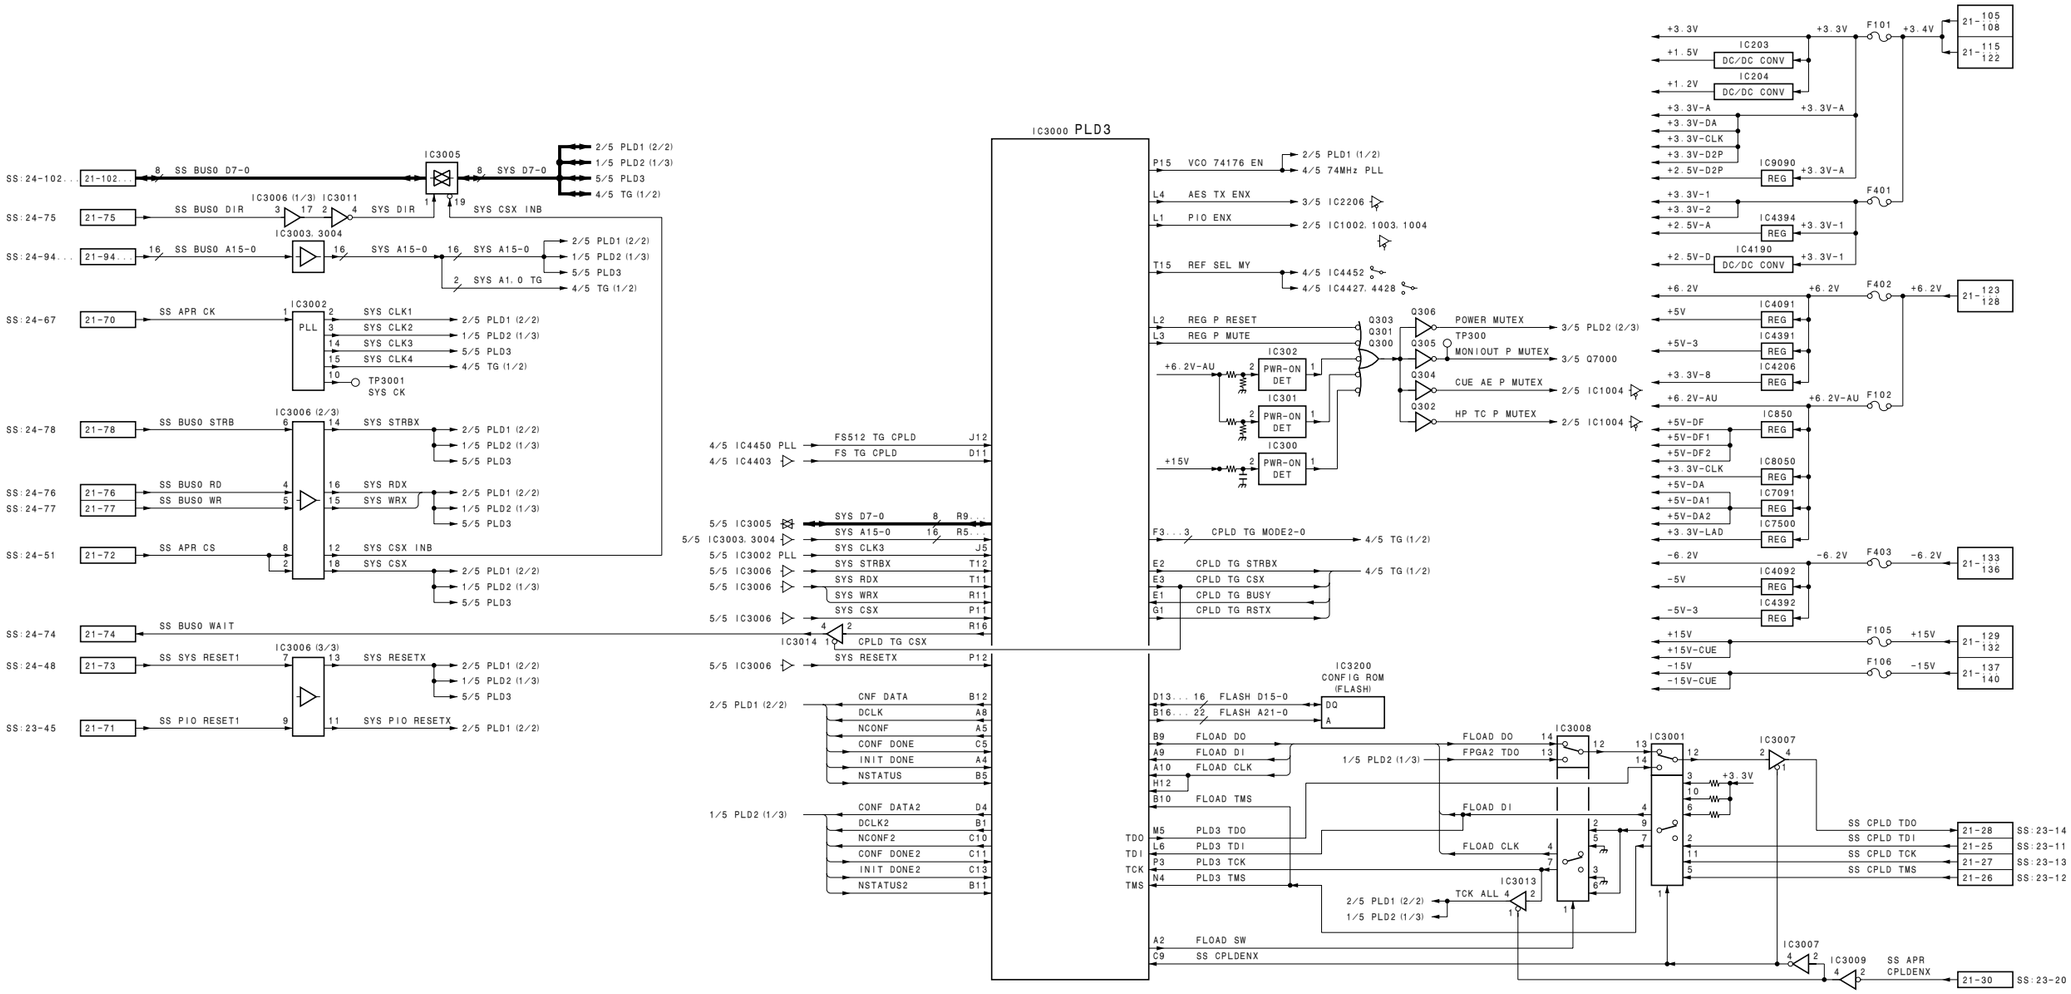
IC3000 PLD3
IC3005
IC3006 (1/3) IC3011
IC3003. 3004
IC3002
IC3006 (2/3)
IC3006 (3/3)
IC3014
IC3200 CONFIG ROM (FLASH)
IC3008
IC3001
IC3007
IC3013
IC3009
SS:24-102...
SS:24-75
SS:24-94...
SS:24-67
SS:24-78
SS:24-76
SS:24-77
SS:24-51
SS:24-74
SS:24-48
SS:23-45
SS BUS0 D7-0
SS BUS0 DIR
SS BUS0 A15-0
SS APR CK
SS BUS0 STRB
SS BUS0 RD
SS BUS0 WR
SS APR CS
SS BUS0 WAIT
SS SYS RESET1
SS PIO RESET1
SYS D7-0
SYS DIR
SYS CSX INB
SYS A15-0
SYS A1. 0 TG
SYS CLK1
SYS CLK2
SYS CLK3
SYS CLK4
TP3001 SYS CK
SYS STRBX
SYS RDX
SYS WRX
SYS CSX
SYS RESETX
SYS PIO RESETX
2/5 PLD1 (2/2)
1/5 PLD2 (1/3)
5/5 PLD3
4/5 TG (1/2)
4/5 IC4450 PLL
4/5 IC4403
5/5 IC3005
5/5 IC3003. 3004
5/5 IC3002 PLL
5/5 IC3006
FS512 TG CPLD
FS TG CPLD
CPLD TG CSX
CNF DATA
DCLK
NCONF
CONF DONE
INIT DONE
NSTATUS
CONF DATA2
DCLK2
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
P15 VCO 74176 EN
4/5 74MHz PLL
L4 AES TX ENX
3/5 IC2206
L1 PIO ENX
2/5 IC1002. 1003. 1004
T15 REF SEL MY
4/5 IC4452
4/5 IC4427. 4428
L2 REG P RESET
L3 REG P MUTE
+6.2V-AU
+15V
PWR-ON DET
POWER MUTEX
TP300
MONIOUT P MUTEX
CUE AE P MUTEX
HP TC P MUTEX
3/5 PLD2 (2/3)
3/5 Q7000
2/5 IC1004
F3...3 CPLD TG MODE2-0
E2 CPLD TG STRBX
E3 CPLD TG CSX
E1 CPLD TG BUSY
G1 CPLD TG RSTX
D13...16 FLASH D15-0
B16...22 FLASH A21-0
B9 FLOAD DO
A9 FLOAD DI
A10 FLOAD CLK
M12
B10 FLOAD TMS
TDO
TDI
TCK
TMS
M5 PLD3 TDO
L6 PLD3 TDI
P3 PLD3 TCK
N4 PLD3 TMS
A2 FLOAD SW
C9 SS CPLDENX
FPGA2 TDO
TCK ALL 4
+3. 3V
SS CPLD TDO
SS CPLD TDI
SS CPLD TCK
SS CPLD TMS
SS APR CPLDENX
+3.3V
+1.5V
+1.2V
+3.3V-A
+3.3V-DA
+3.3V-CLK
+3.3V-D2P
+2.5V-D2P
+3.3V-1
+3.3V-2
+2.5V-A
+2.5V-D
+6.2V
+5V
+5V-3
+3.3V-8
+6.2V-AU
+5V-DF
+5V-DF1
+5V-DF2
+3.3V-CLK
+5V-DA
+5V-DA1
+5V-DA2
+3.3V-LAD
-6.2V
-5V
-5V-3
+15V
+15V-CUE
-15V
-15V-CUE
IC203 DC/DC CONV
IC204 DC/DC CONV
IC9090 REG
IC4394 REG
IC4190 DC/DC CONV
IC4091 REG
IC4391 REG
IC4206 REG
IC850 REG
IC8050 REG
IC7091 REG
IC7500 REG
IC4092 REG
IC4392 REG
F101
F401
F402
F102
F403
F105
F106
21-105 108
21-115 122
21-123 128
21-133 136
21-129 132
21-137 140
21-28 SS:23-14
21-25 SS:23-11
21-27 SS:23-13
21-26 SS:23-12
21-30 SS:23-20

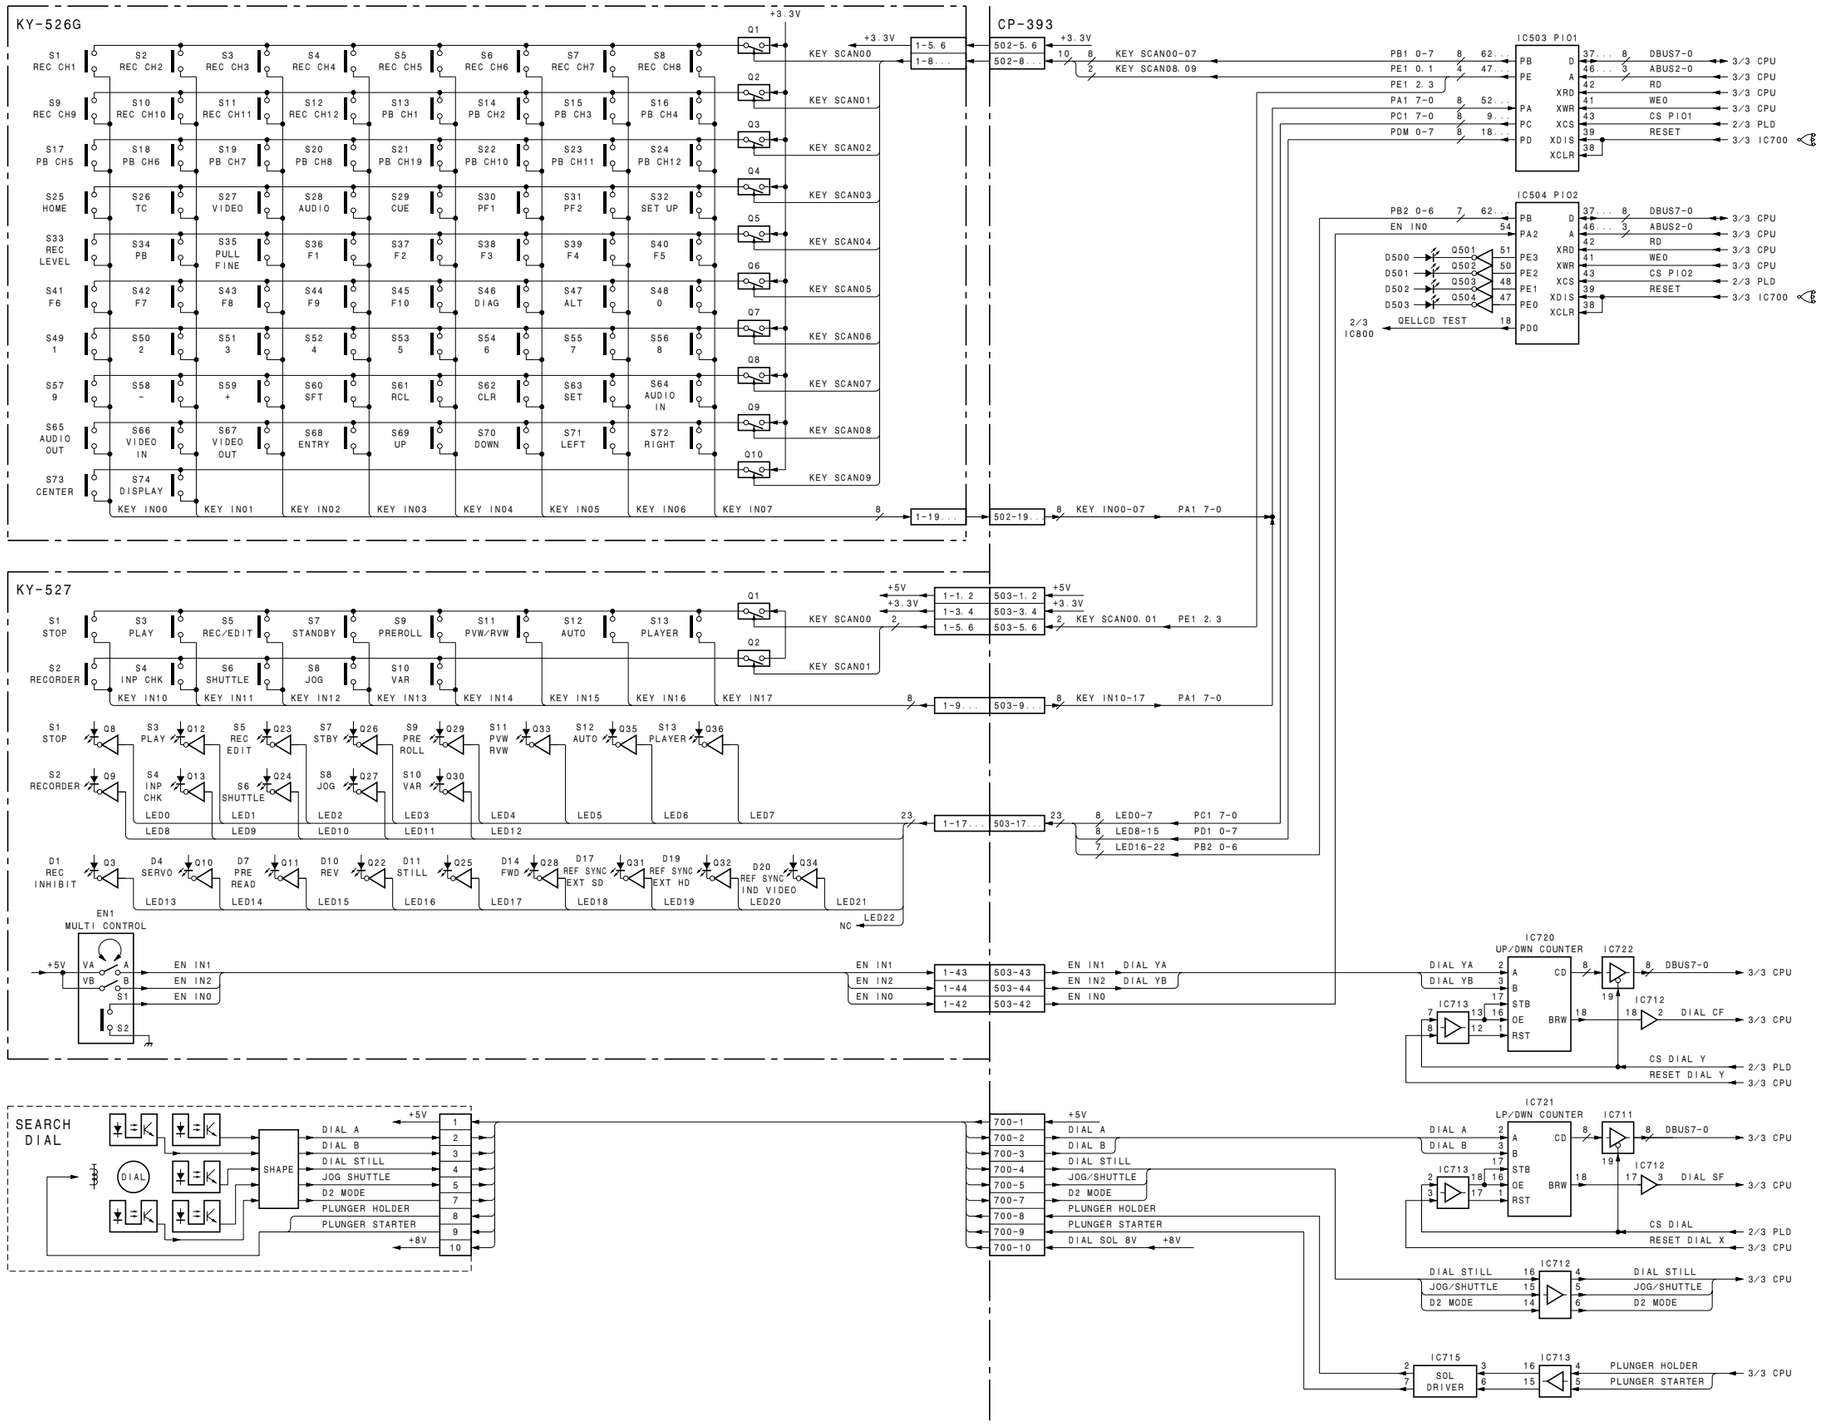

CP-393 (1/3)

KY-526G, 527

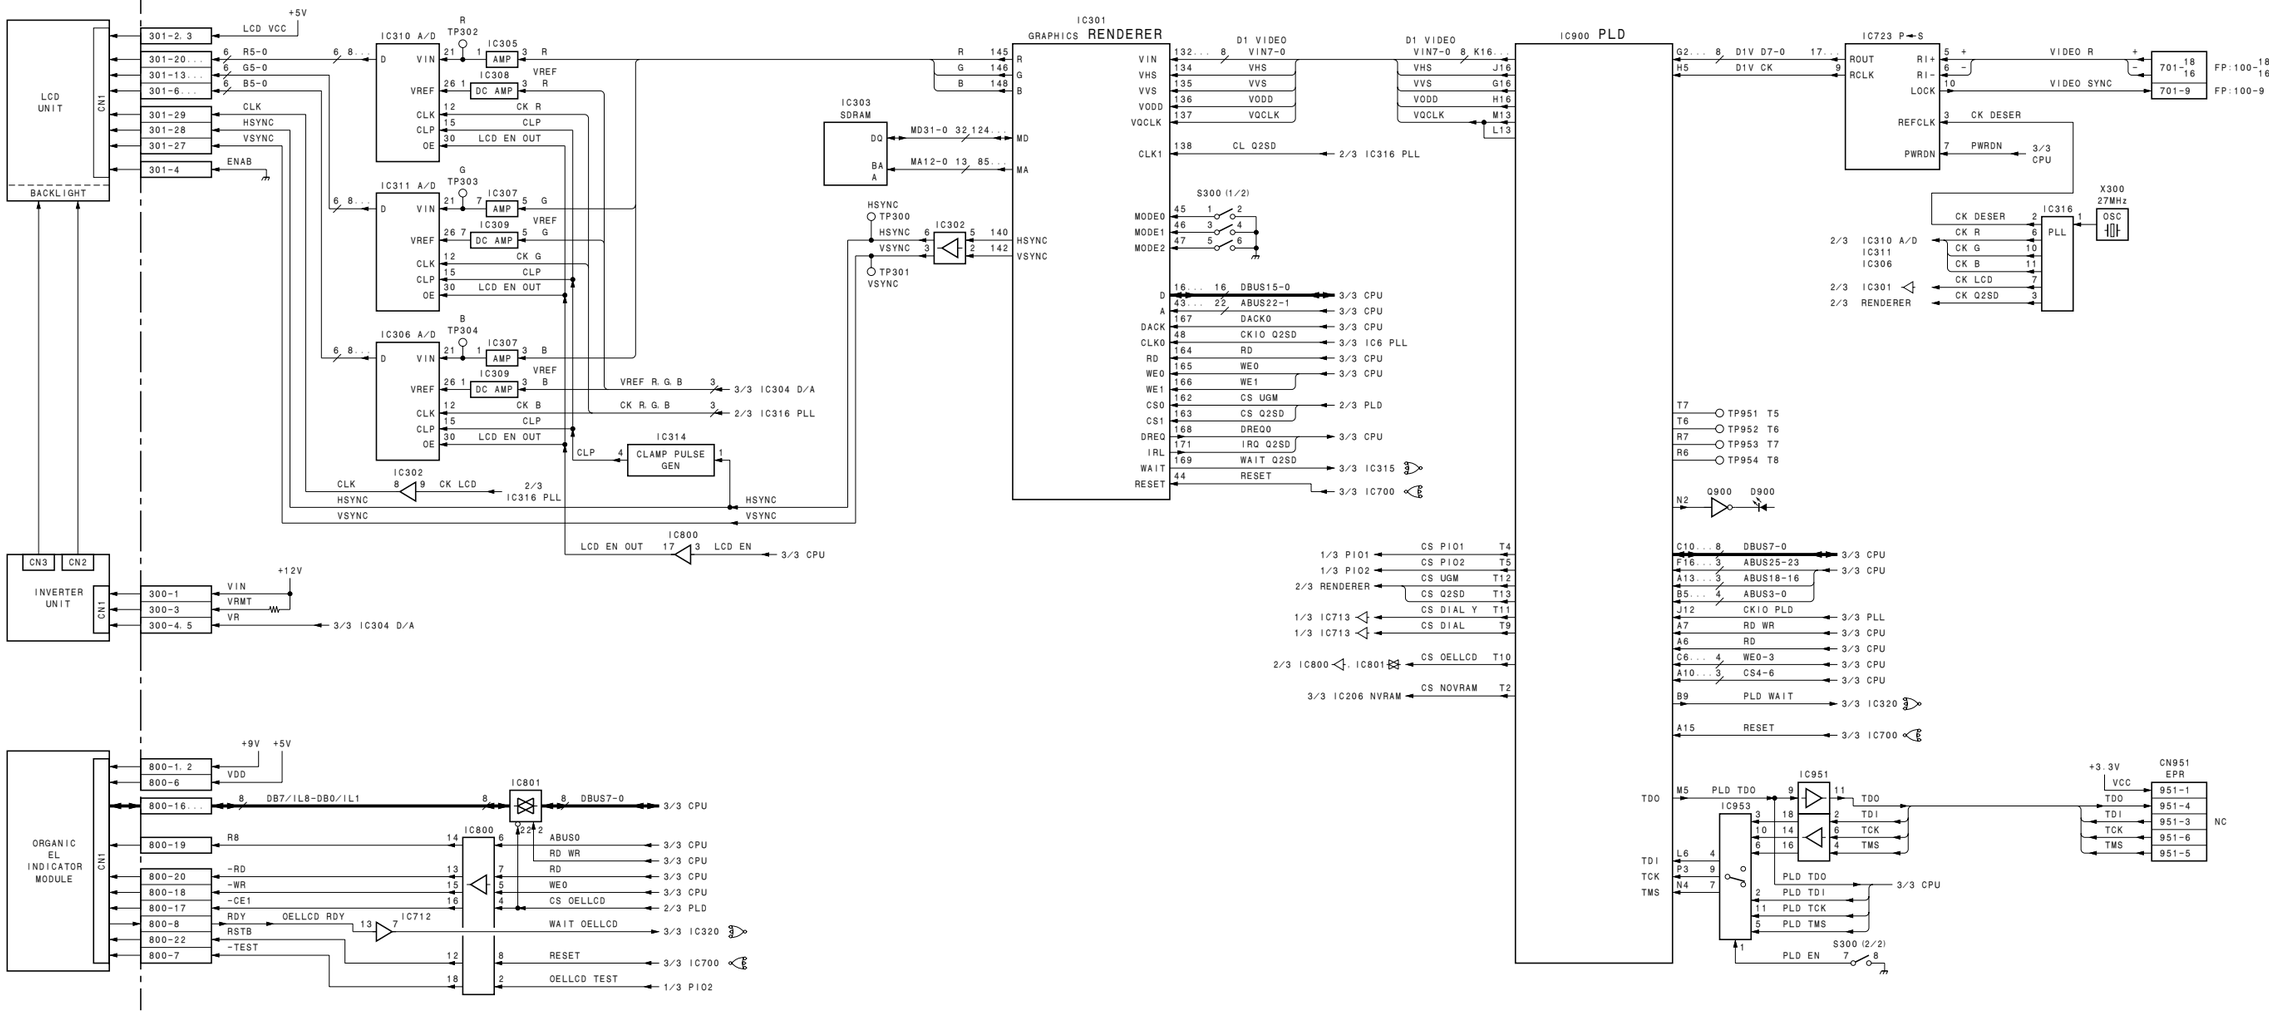
LCD UNIT
CN1
BACKLIGHT
301-2, 3
LCD VCC
+5V
301-20...
R5-0
301-13...
G5-0
301-6...
B5-0
301-29
CLK
301-28
HSYNC
301-27
VSYNC
301-4
ENAB
IC310 A/D
IC311 A/D
IC306 A/D
TP302
TP303
TP304
IC305
IC308
IC307
IC309
AMP
DC AMP
VREF
CK R
CK G
CK B
CLP
LCD EN OUT
VREF R, G, B
3/3 IC304 D/A
CK R, G, B
2/3 IC316 PLL
IC314
CLAMP PULSE GEN
IC302
CK LCD
IC800
LCD EN
3/3 CPU
IC303
SDRAM
MD31-0
MA12-0
IC301
GRAPHICS RENDERER
TP300
TP301
D1 VIDEO
VIN7-0
CL Q2SD
S300 (1/2)
MODE0
MODE1
MODE2
DBUS15-0
ABUS22-1
DACK0
CKIO Q2SD
RD
WE0
WE1
CS UGM
CS Q2SD
DREQ0
IRQ Q2SD
WAIT Q2SD
RESET
IC900 PLD
IC723 P→S
ROUT
RCLK
RI+
RI-
LOCK
REFCLK
PWRDN
VIDEO R
VIDEO SYNC
CK DESER
X300
27MHz
IC316
PLL
OSC
2/3 IC310 A/D
IC311
IC306
2/3 IC301
2/3 RENDERER
TP951 T5
TP952 T6
TP953 T7
TP954 T8
Q900
D900
DBUS7-0
ABUS25-23
ABUS18-16
ABUS3-0
CKIO PLD
RD WR
WE0-3
CS4-6
PLD WAIT
RESET
CS PIO1
CS PIO2
CS UGM
CS Q2SD
CS DIAL Y
CS DIAL
CS OELLCD
CS NOVRAM
1/3 PIO1
1/3 PIO2
2/3 RENDERER
1/3 IC713
2/3 IC800
IC801
3/3 IC206 NVRAM
INVERTER UNIT
300-1
VIN
300-3
VRMT
300-4, 5
VR
+12V
3/3 IC304 D/A
ORGANIC EL INDICATOR MODULE
800-1, 2
+9V
VDD
800-6
800-16...
DB7/IL8-DB0/IL1
800-19
R8
800-20
-RD
800-18
-WR
800-17
-CE1
800-8
RDY
800-22
RSTB
800-7
-TEST
IC712
OELLCD RDY
ABUS0
RD WR
RD
WE0
CS OELLCD
WAIT OELLCD
RESET
OELLCD TEST
1/3 PIO2
TDO
TDI
TCK
TMS
IC951
IC953
PLD TDO
PLD TDI
PLD TCK
PLD TMS
PLD EN
S300 (2/2)
+3.3V
CN951
EPR
VCC
NC

CP-393 (2/3)

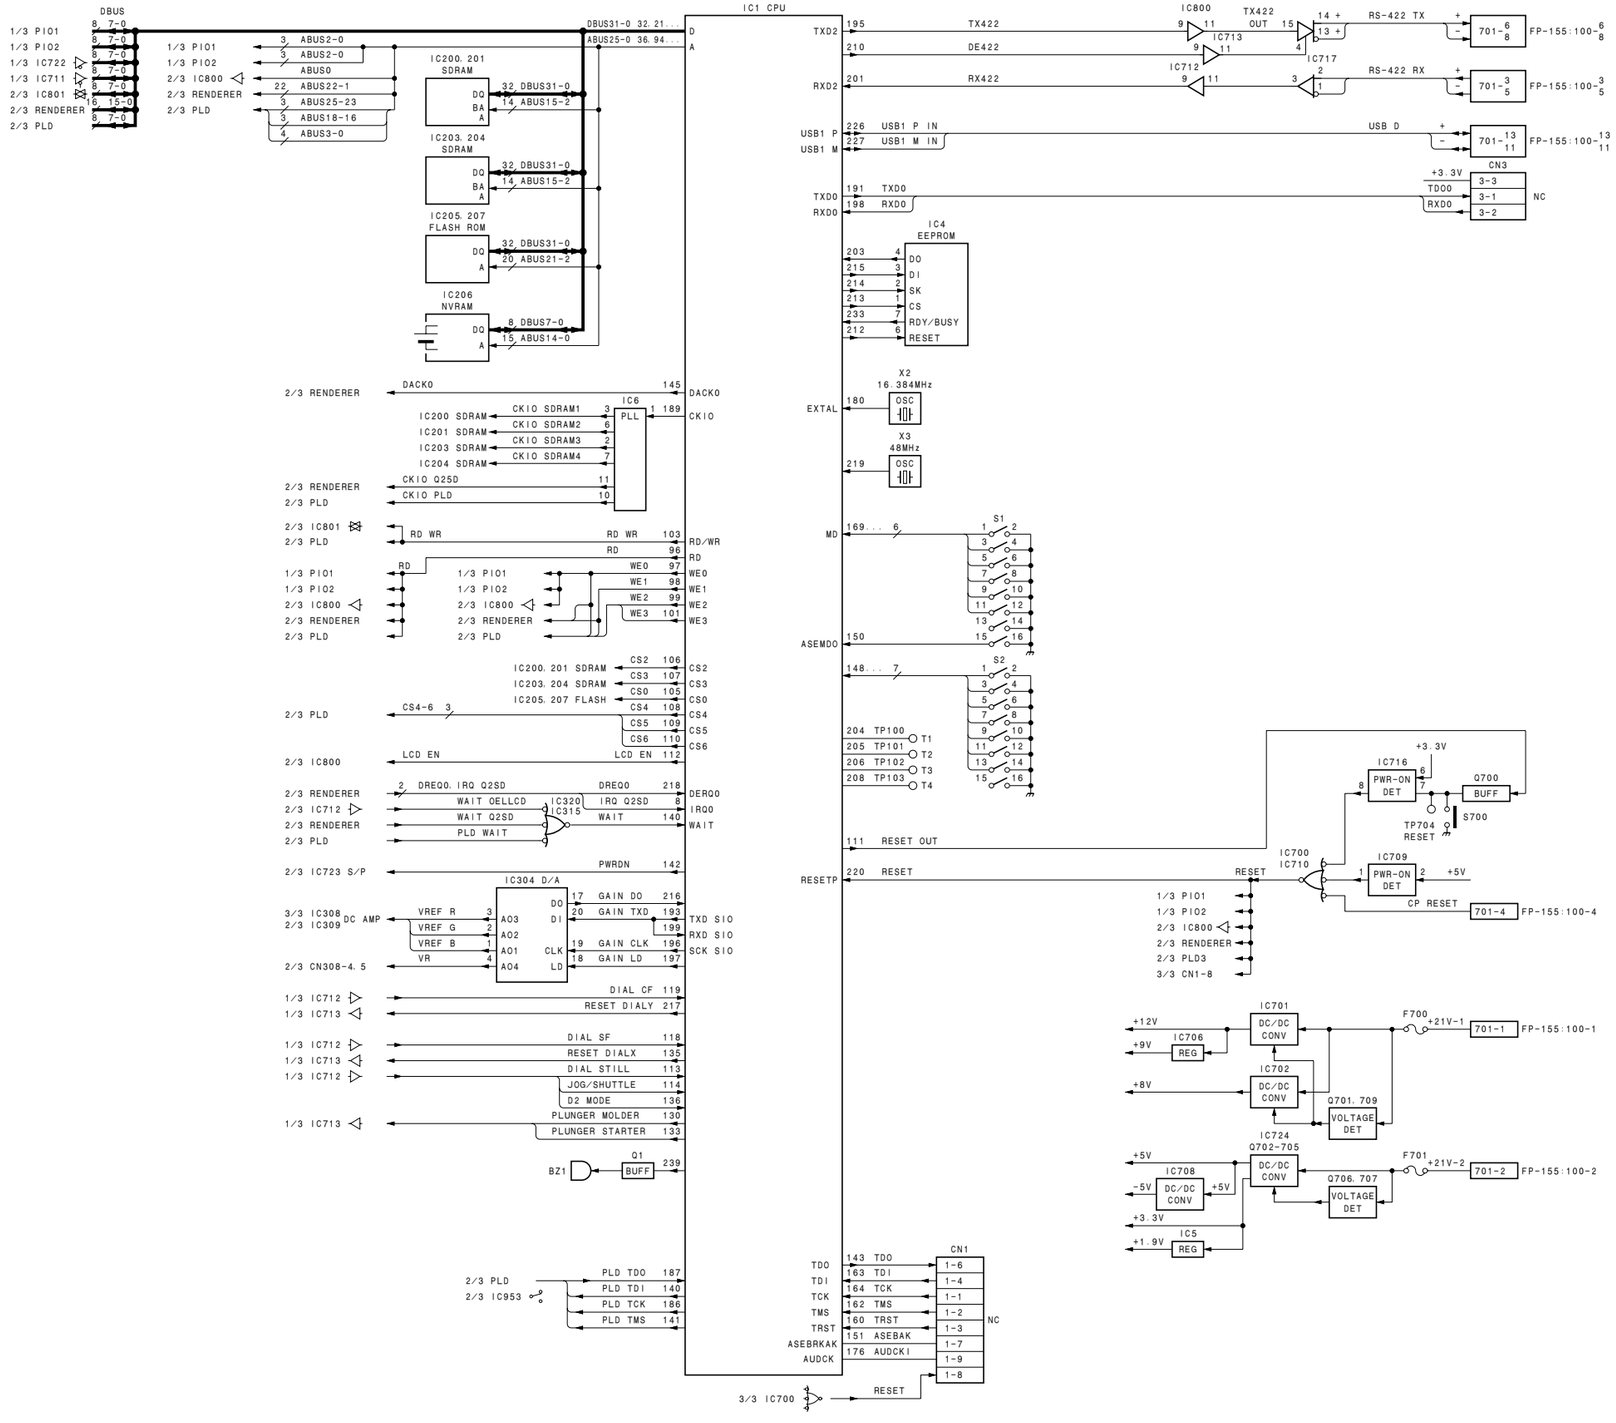
DBUS
IC1 CPU
IC200. 201 SDRAM
IC203. 204 SDRAM
IC205. 207 FLASH ROM
IC206 NVRAM
IC4 EEPROM
IC6 PLL
X2 16.384MHz
X3 48MHz
S1
S2
IC304 D/A
IC315
IC320
IC700
IC710
IC712
IC713
IC716
IC717
IC800
IC701
IC702
IC706
IC708
IC709
IC724
Q700
Q701. 709
Q702-705
Q706. 707
F700
F701
CN1
CN3
TX422
RS-422 TX
RS-422 RX
USB D
CP RESET
RESET
RESET DIALY
DIAL CF
DIAL SF
RESET DIALX
DIAL STILL
JOG/SHUTTLE
D2 MODE
PLUNGER MOLDER
PLUNGER STARTER
WAIT OELLCD
WAIT Q2SD
PLD WAIT
PWRDN
DACK0
CKIO
CKIO Q25D
CKIO PLD
RD WR
RD
WE0
WE1
WE2
WE3
LCD EN
DREQ0. IRQ Q2SD
DREQ0
IRQ Q2SD
WAIT
DC AMP
VREF R
VREF G
VREF B
VR
GAIN DO
GAIN TXD
GAIN CLK
GAIN LD
TXD SIO
RXD SIO
SCK SIO
DERQ0
IRQ0
WAIT
TDO
TDI
TCK
TMS
TRST
ASEBRKAK
AUDCK
NC
BZ1
BUFF
VOLTAGE DET
REG
+3.3V
+5V
+12V
+9V
+8V
+1.9V
-5V
+21V-1
+21V-2

CP-393 (3/3)

CP-397, 398, 399

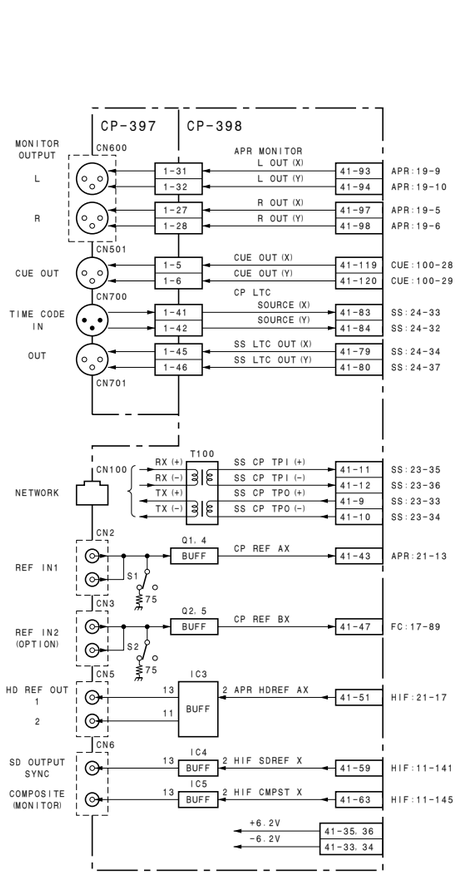

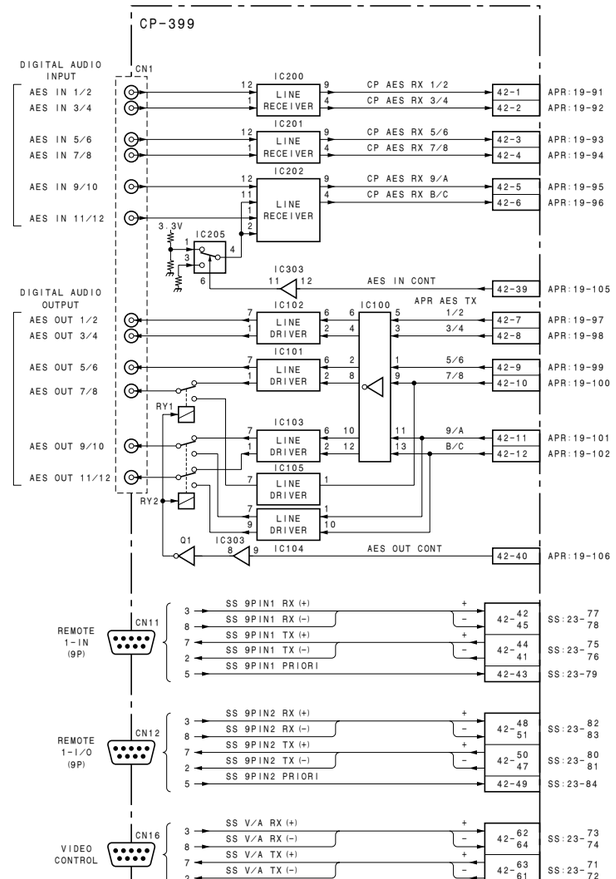

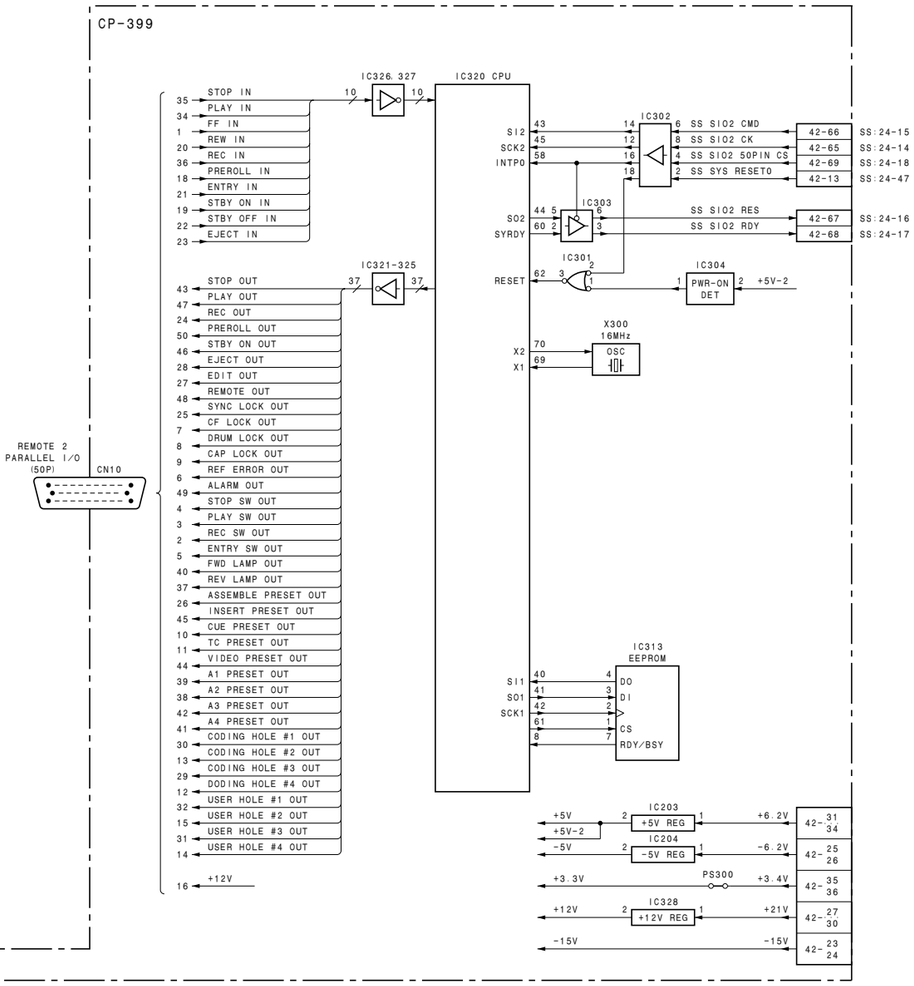

CP-397, 398, 399

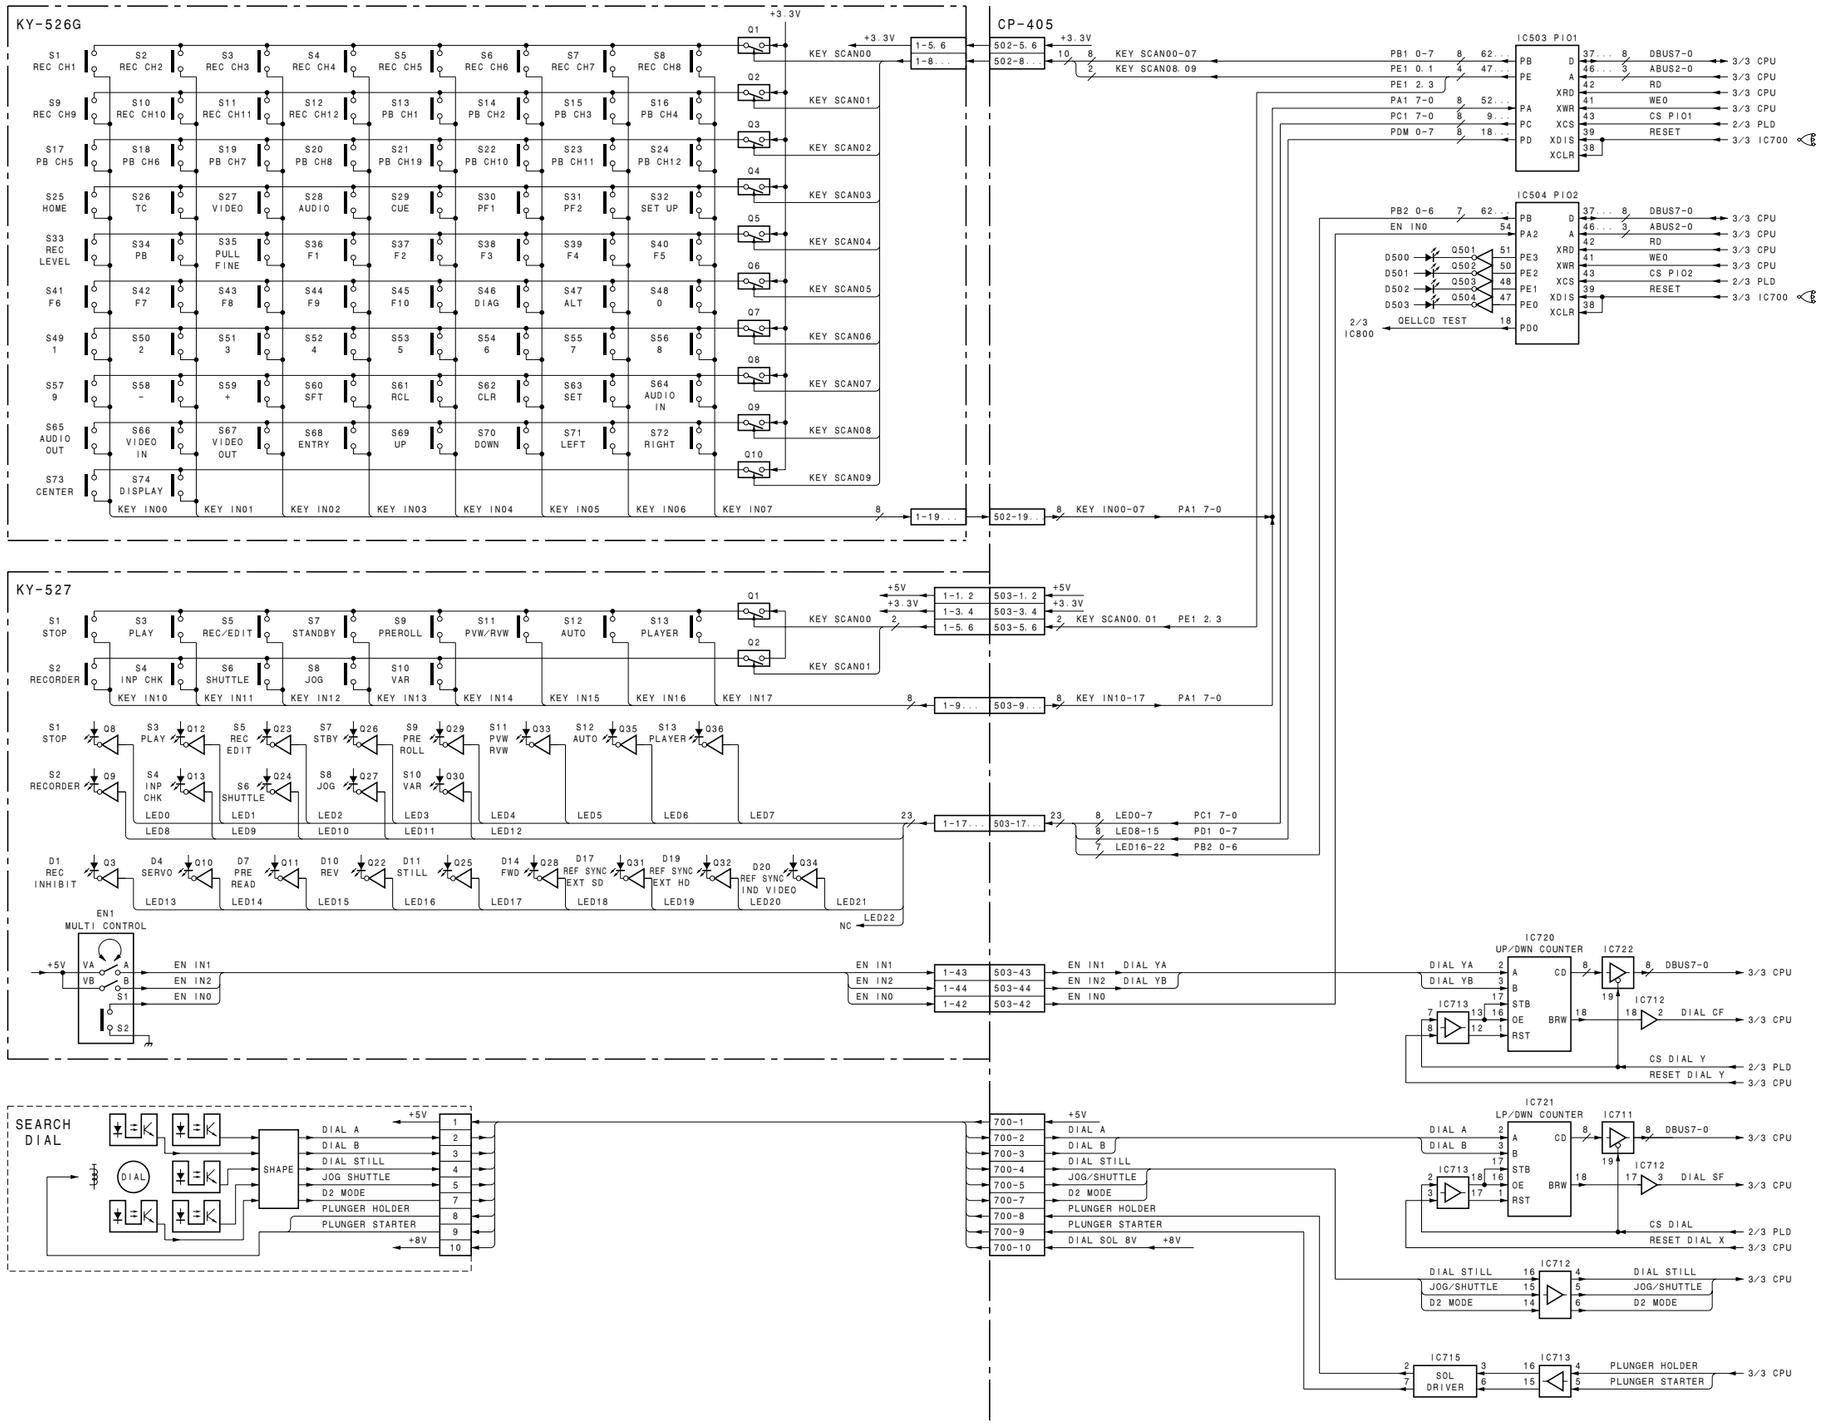

CP-405 (1/3)

KY-526G, 527

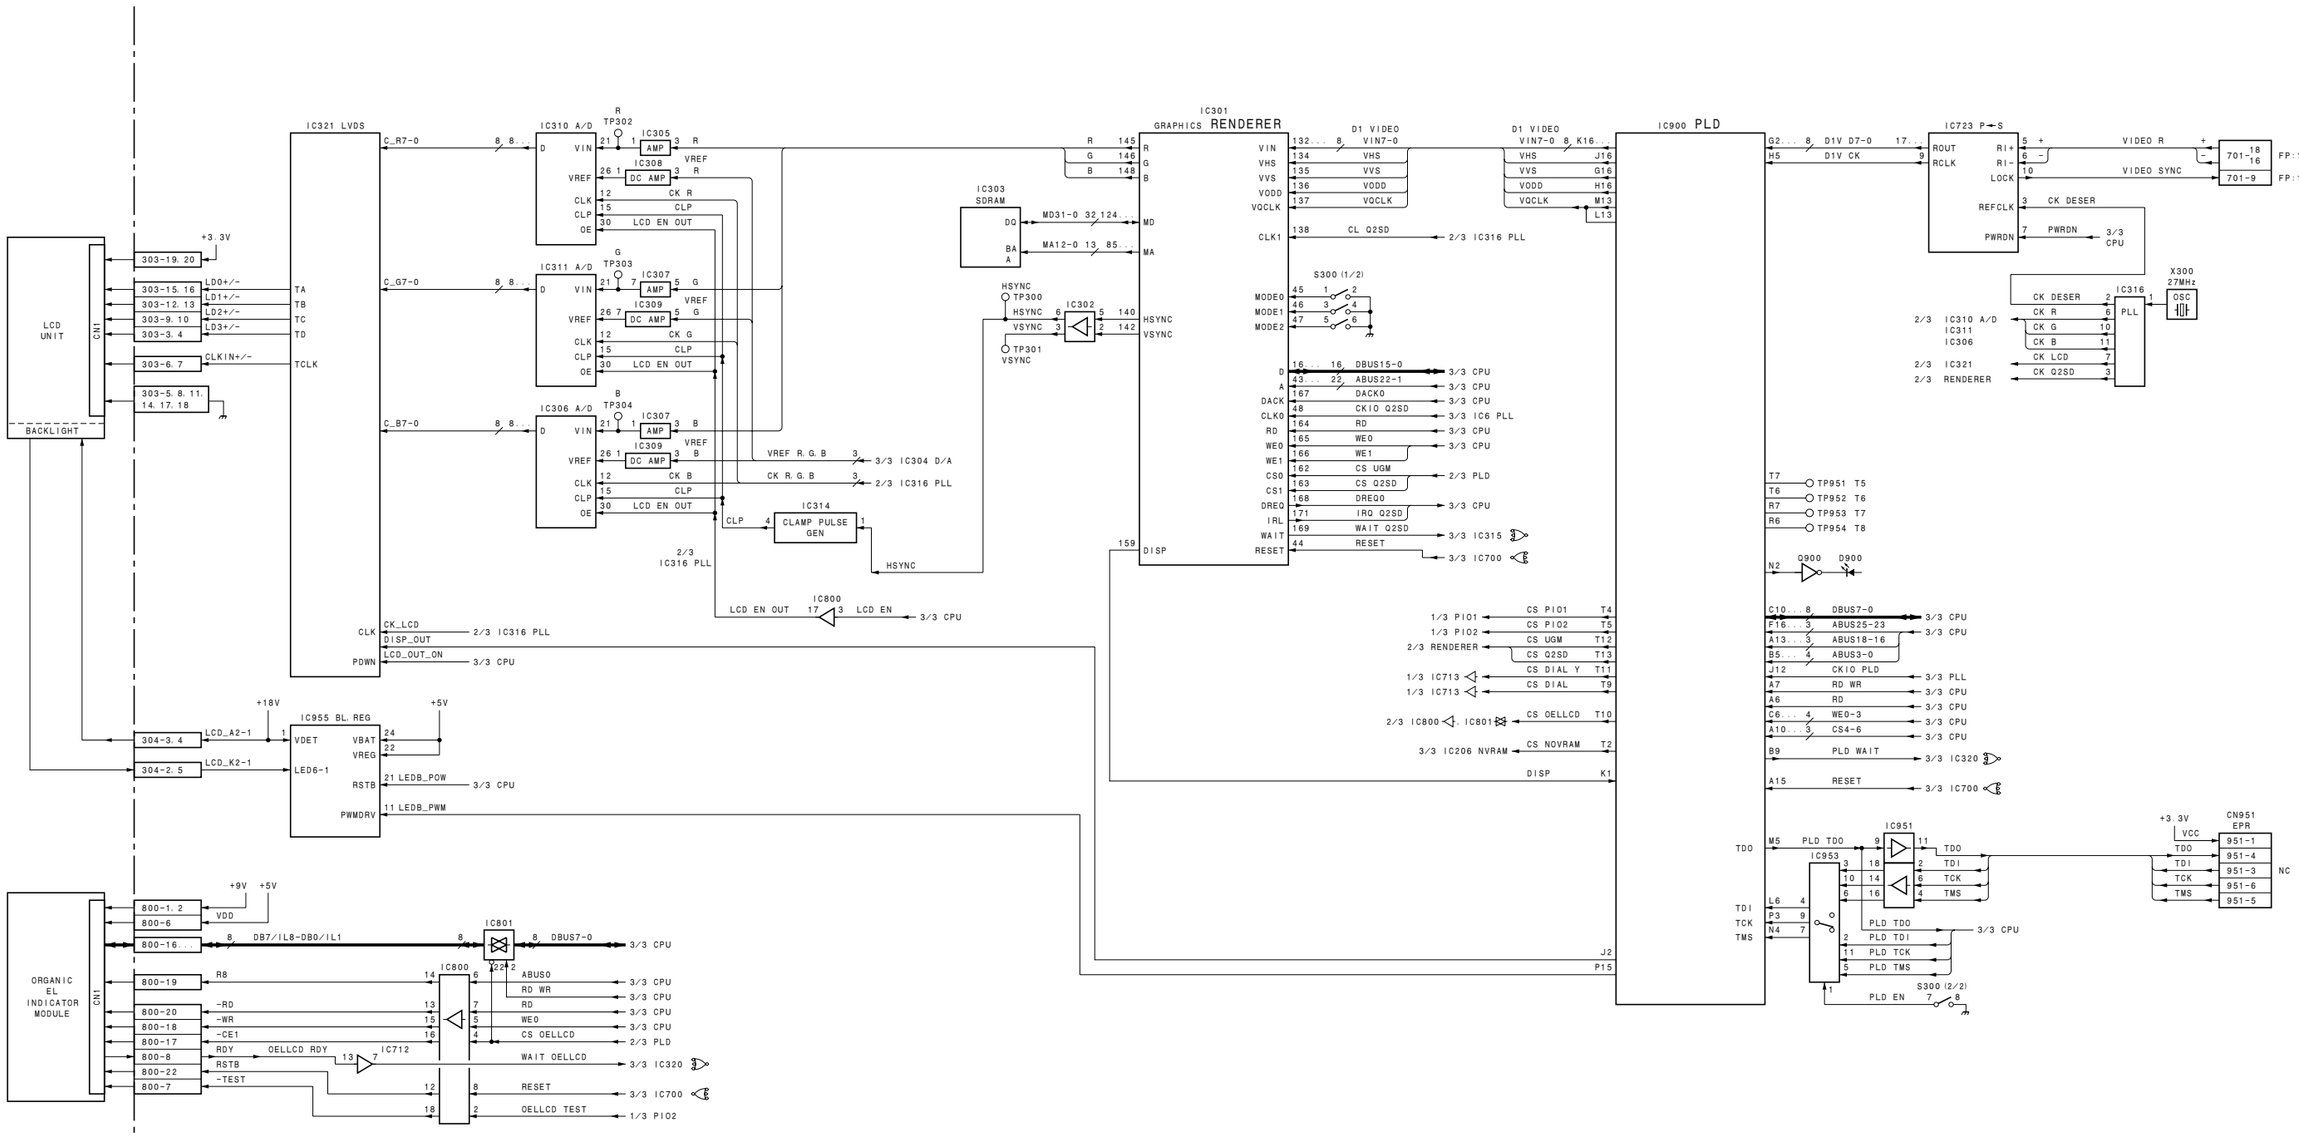

CP-405 (2/3)
KY-526G, 527

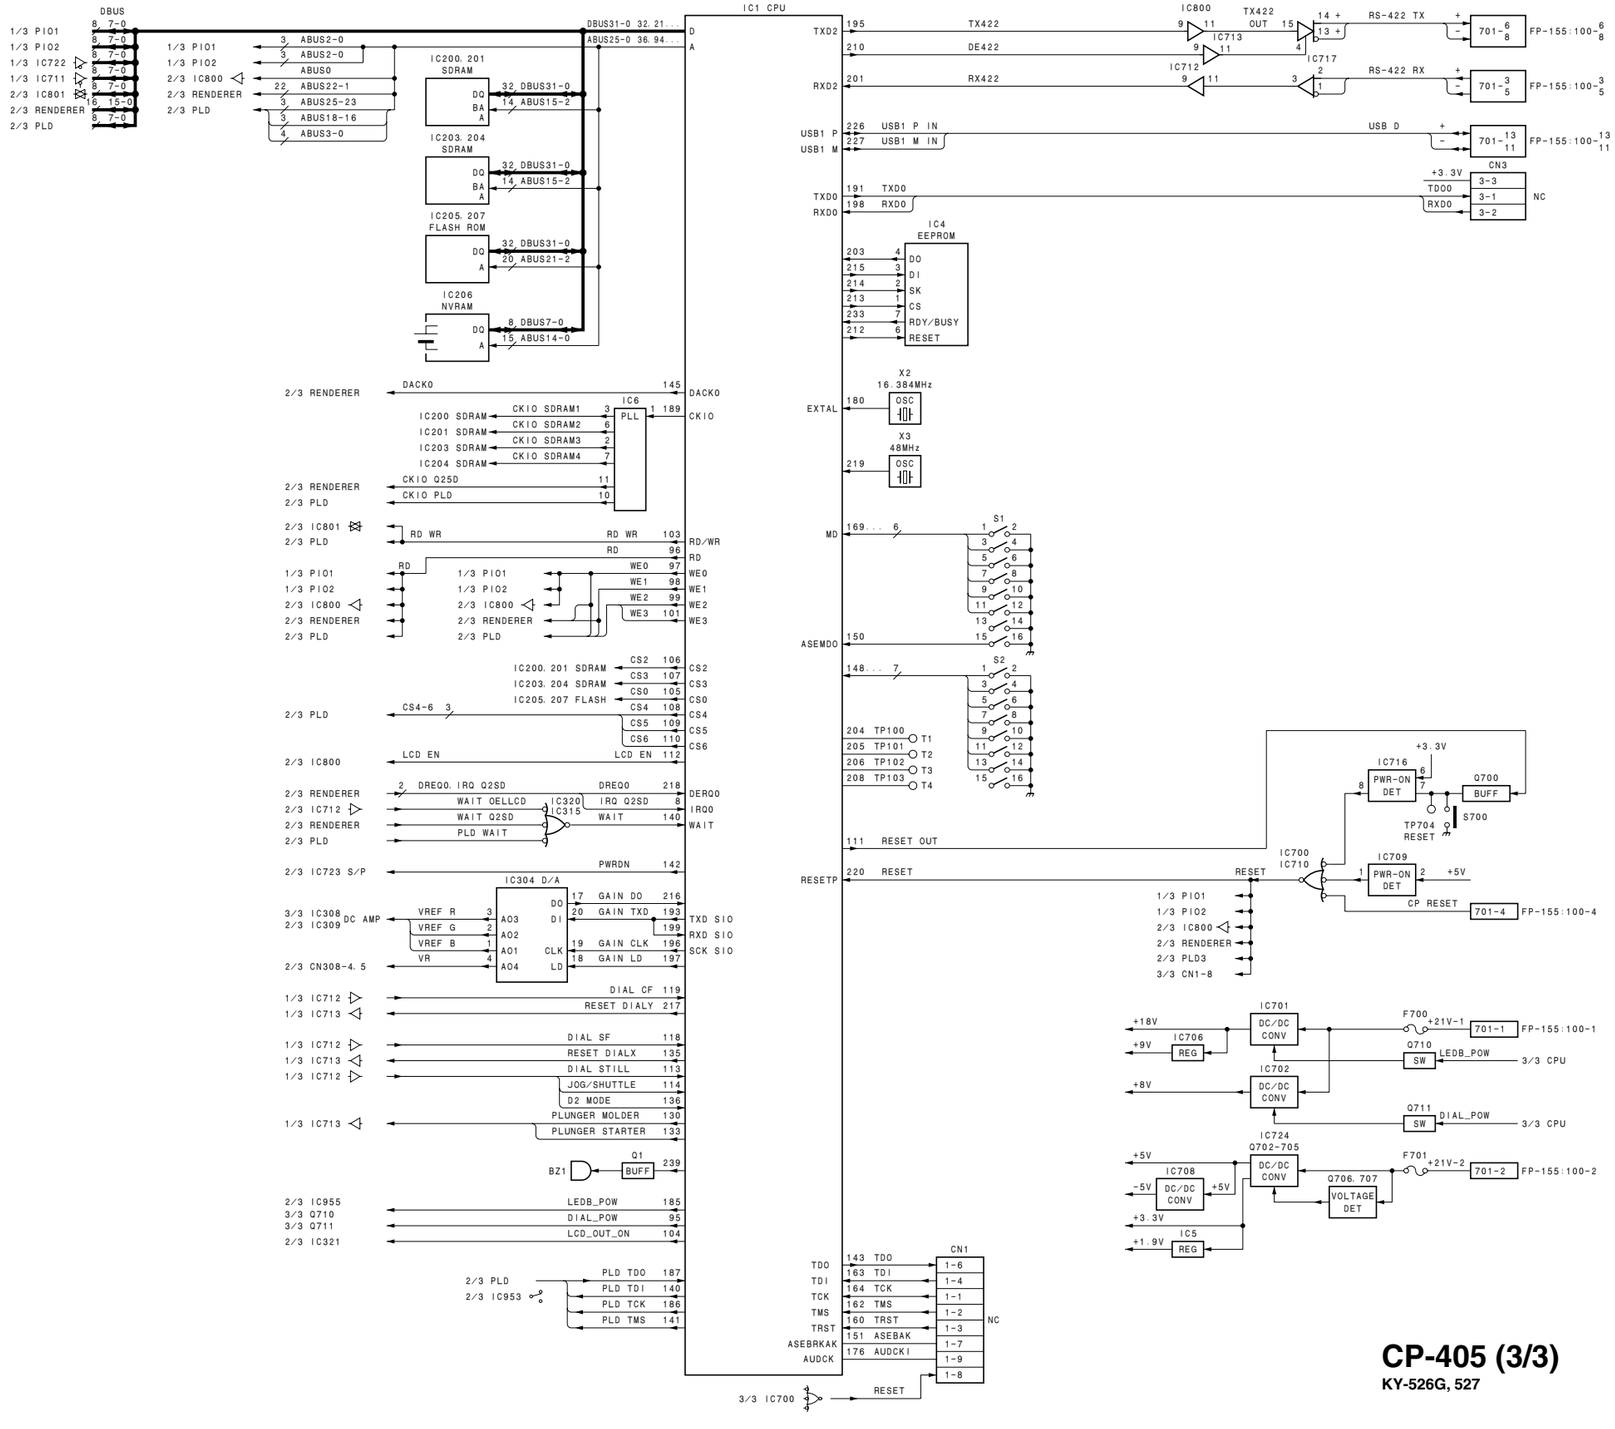

CP-405 (3/3)

KY-526G, 527

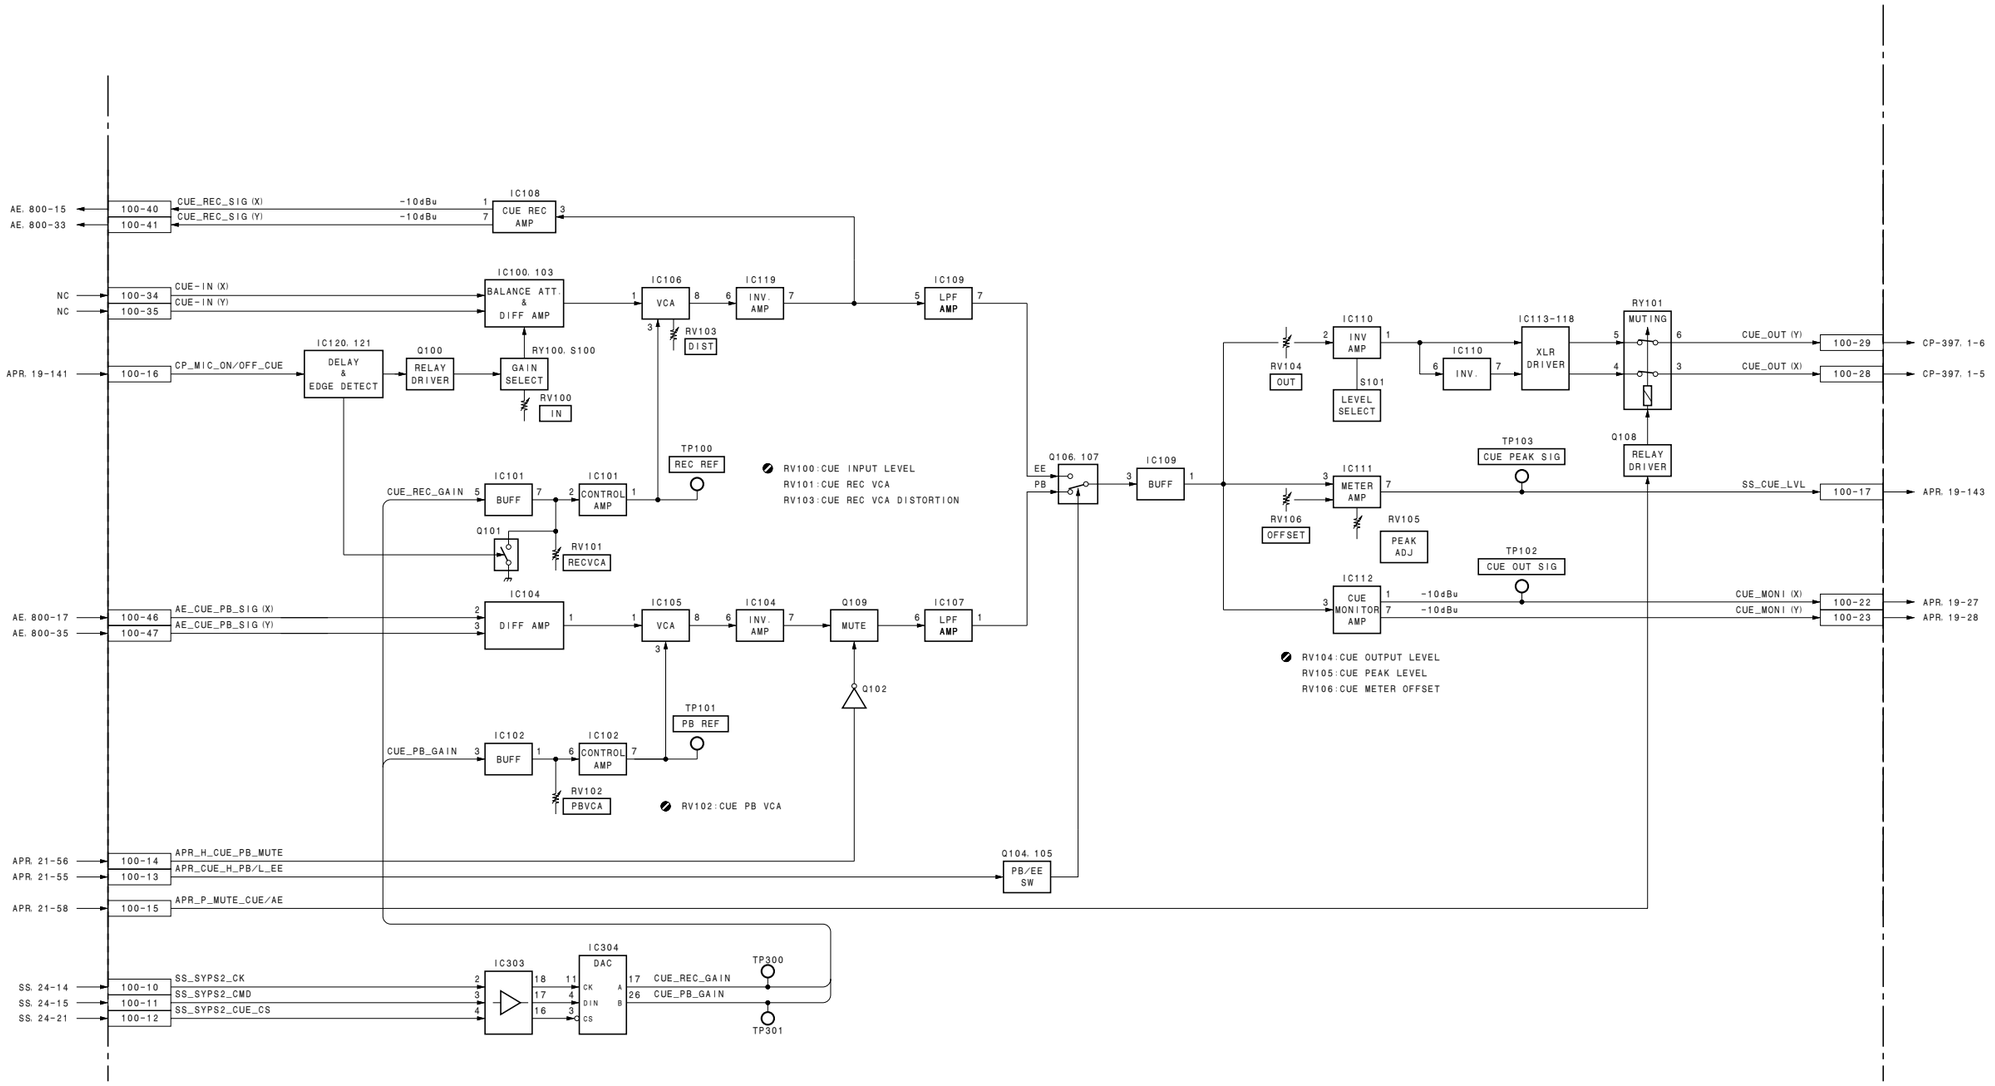
AE. 800-15
AE. 800-33
100-40
100-41
CUE_REC_SIG (X)
CUE_REC_SIG (Y)
-10dBu
-10dBu
IC108
CUE REC AMP
NC
NC
100-34
100-35
CUE-IN (X)
CUE-IN (Y)
IC100, 103
BALANCE ATT. & DIFF AMP
IC106
VCA
IC119
INV. AMP
IC109
LPF AMP
RV103
DIST
APR. 19-141
100-16
CP_MIC_ON/OFF_CUE
IC120, 121
DELAY & EDGE DETECT
Q100
RELAY DRIVER
GAIN SELECT
RY100, S100
RV100
IN
TP100
REC REF
RV100:CUE INPUT LEVEL
RV101:CUE REC VCA
RV103:CUE REC VCA DISTORTION
CUE_REC_GAIN
IC101
BUFF
IC101
CONTROL AMP
Q101
RV101
RECVCA
AE. 800-17
AE. 800-35
100-46
100-47
AE_CUE_PB_SIG (X)
AE_CUE_PB_SIG (Y)
IC104
DIFF AMP
IC105
VCA
IC104
INV. AMP
Q109
MUTE
IC107
LPF AMP
Q102
TP101
PB REF
CUE_PB_GAIN
IC102
BUFF
IC102
CONTROL AMP
RV102
PBVCA
RV102:CUE PB VCA
APR. 21-56
APR. 21-55
100-14
100-13
APR_H_CUE_PB_MUTE
APR_CUE_H_PB/L_EE
Q104, 105
PB/EE SW
APR. 21-58
100-15
APR_P_MUTE_CUE/AE
SS. 24-14
SS. 24-15
SS. 24-21
100-10
100-11
100-12
SS_SYPS2_CK
SS_SYPS2_CMD
SS_SYPS2_CUE_CS
IC303
IC304
DAC
CK
DIN
CS
A
B
CUE_REC_GAIN
CUE_PB_GAIN
TP300
TP301
Q106, 107
EE
PB
IC109
BUFF
RV104
OUT
IC110
INV AMP
S101
LEVEL SELECT
IC110
INV.
IC113-118
XLR DRIVER
RY101
MUTING
CUE_OUT (Y)
CUE_OUT (X)
100-29
100-28
CP-397. 1-6
CP-397. 1-5
Q108
RELAY DRIVER
TP103
CUE PEAK SIG
IC111
METER AMP
RV106
OFFSET
RV105
PEAK ADJ
SS_CUE_LVL
100-17
APR. 19-143
TP102
CUE OUT SIG
IC112
CUE MONITOR AMP
CUE_MONI (X)
CUE_MONI (Y)
100-22
100-23
APR. 19-27
APR. 19-28
RV104:CUE OUTPUT LEVEL
RV105:CUE PEAK LEVEL
RV106:CUE METER OFFSET

CUE-13

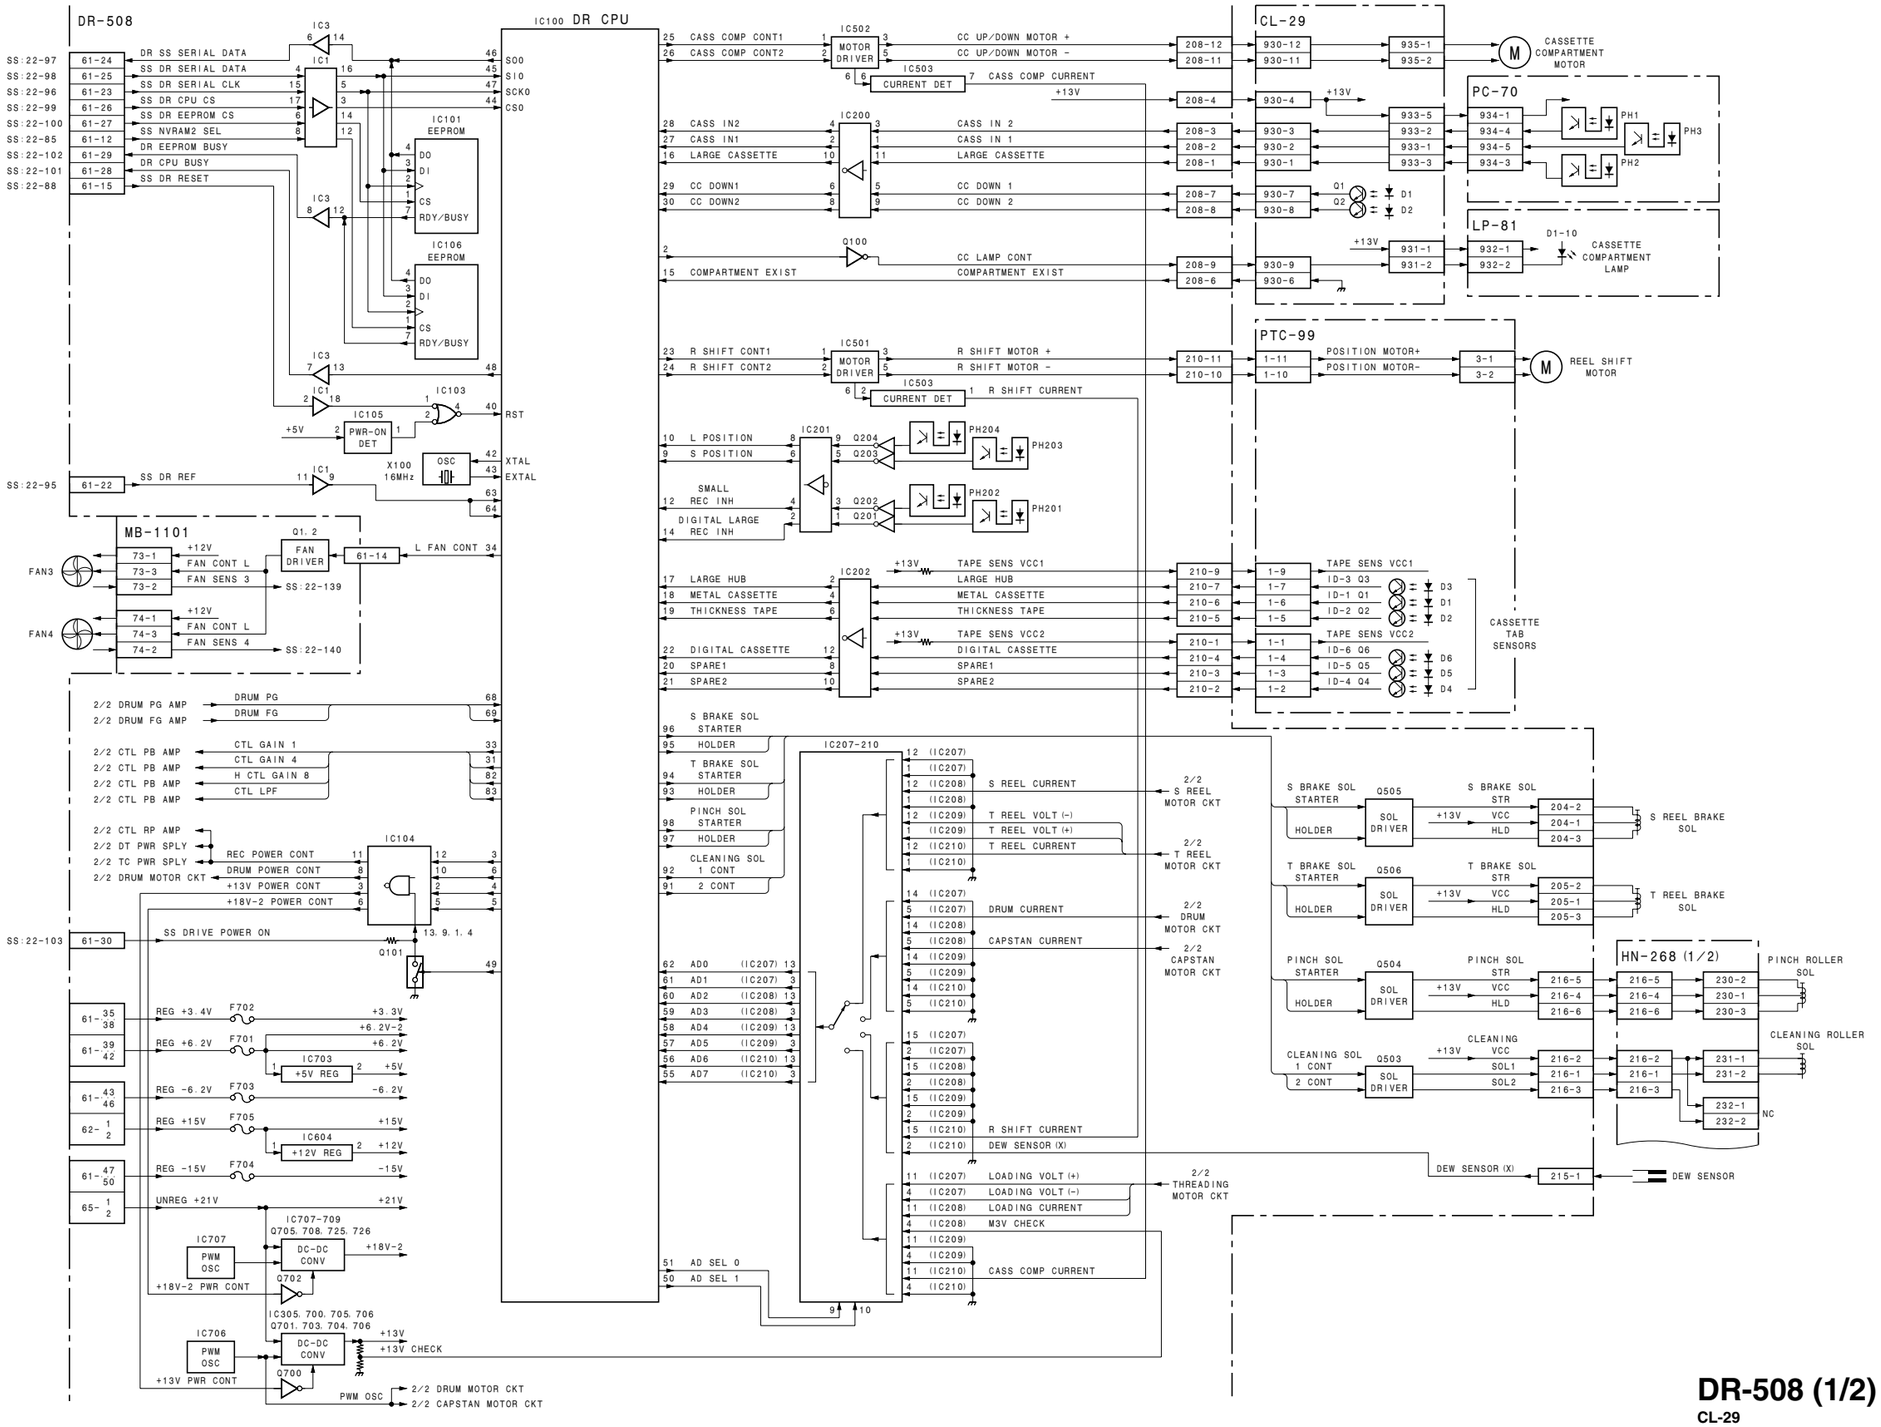

DR-508 (1/2)

CL-29
HN-268 (1/2)
LP-81
PC-70
PTC-99

DR-508 (2/2)

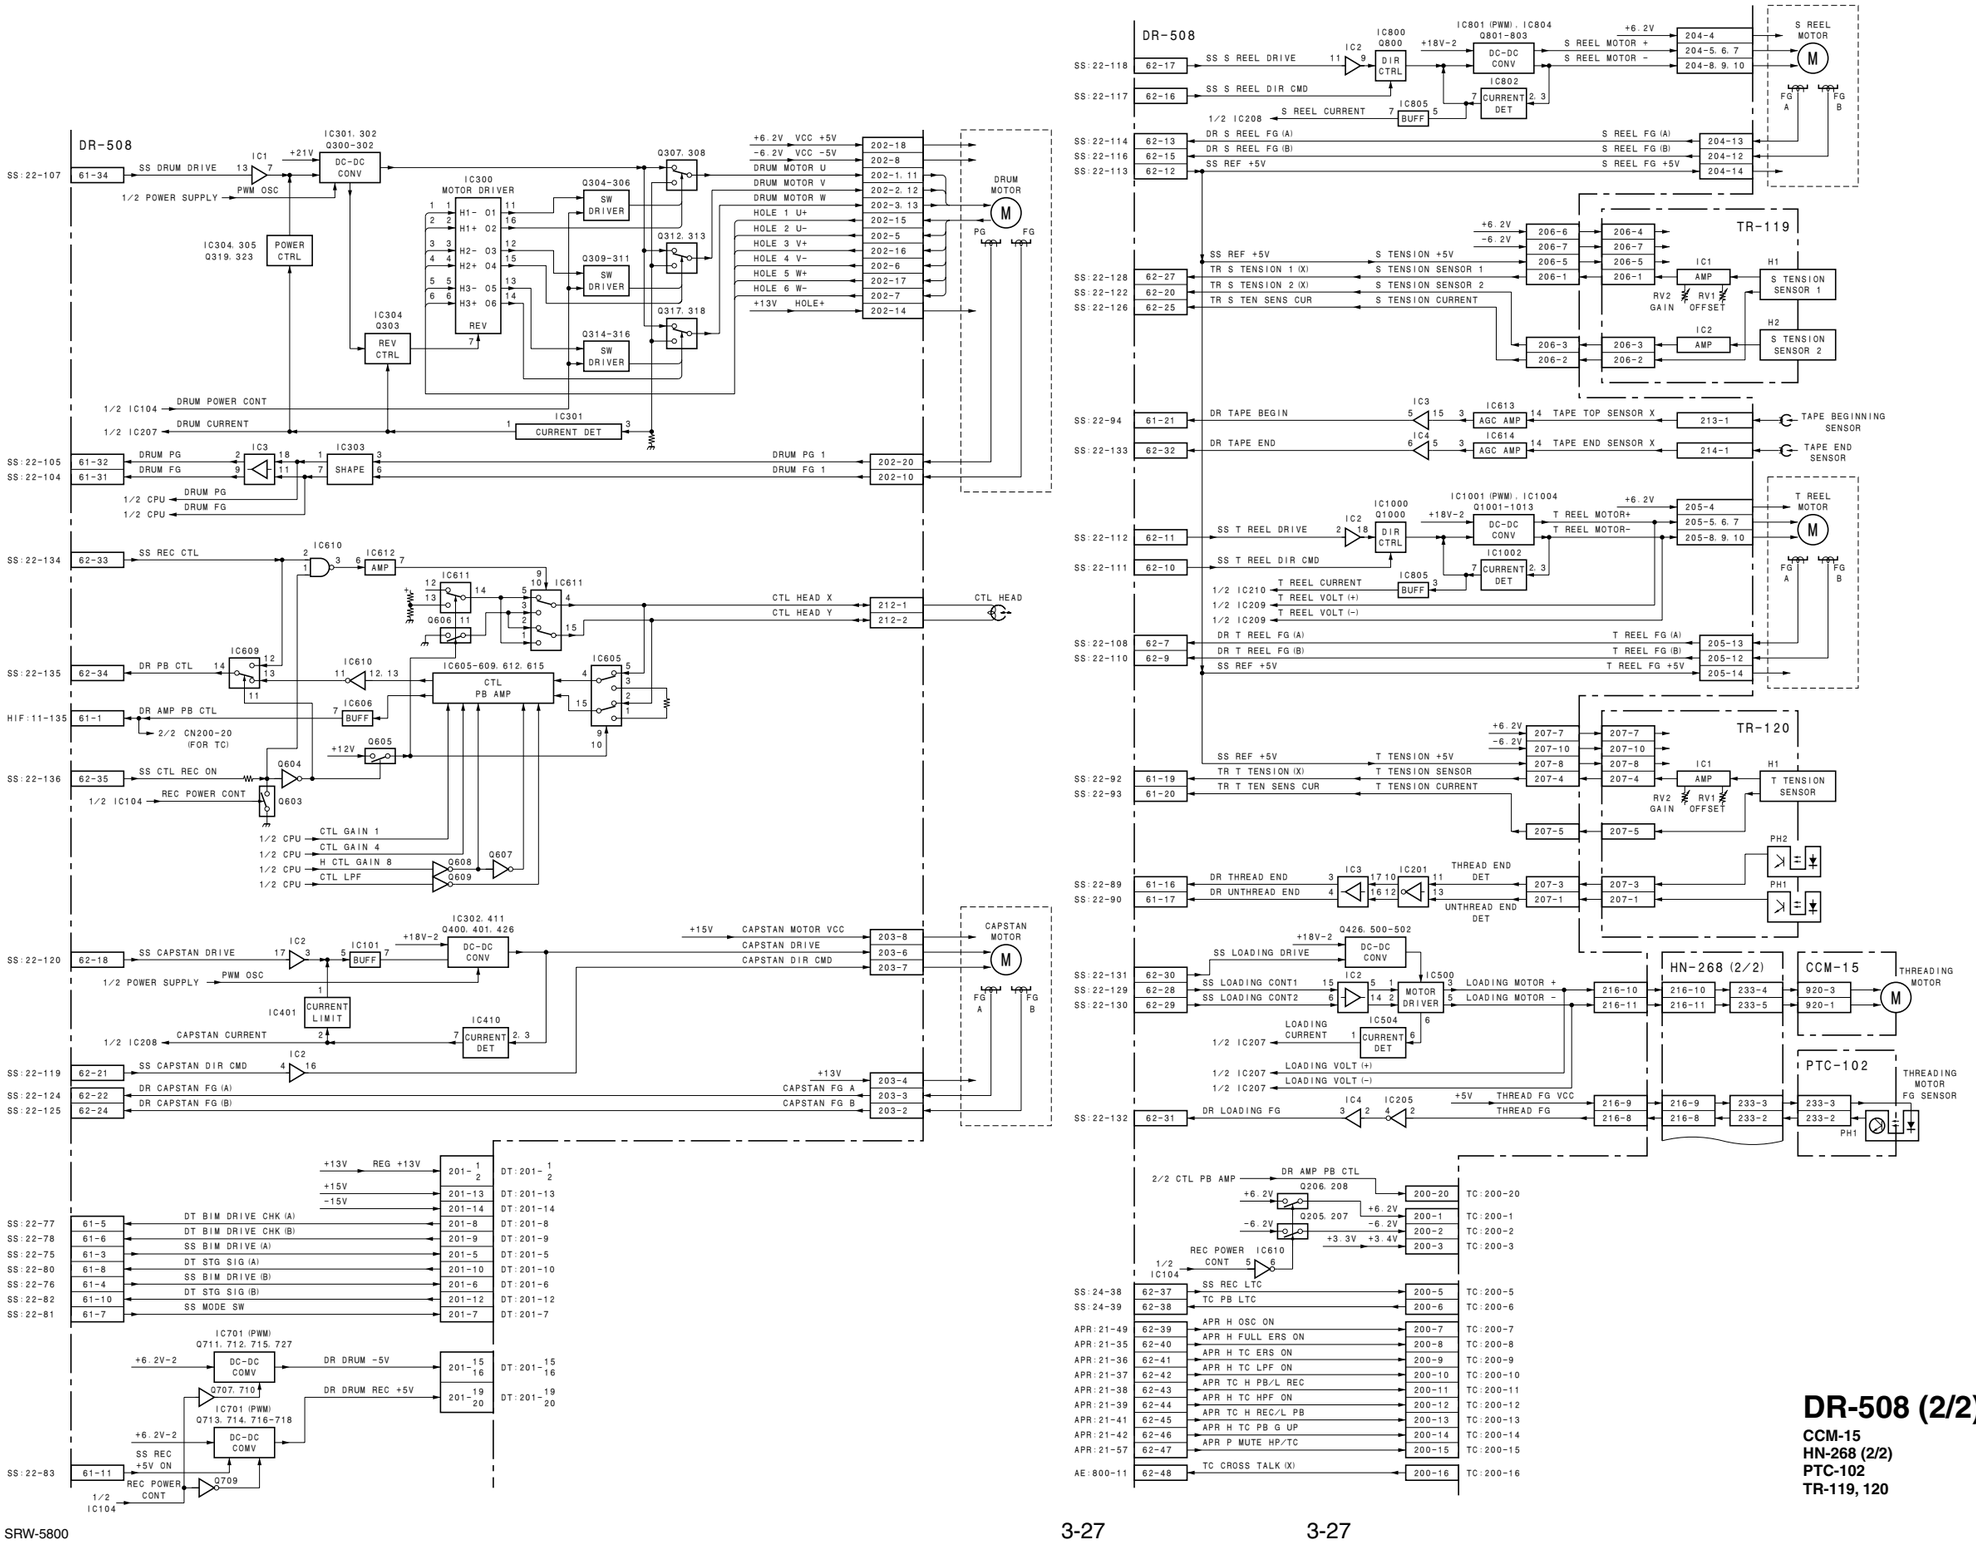

DR-508 (2/2)

CCM-15
HN-268 (2/2)
PTC-102
TR-119, 120

3-27

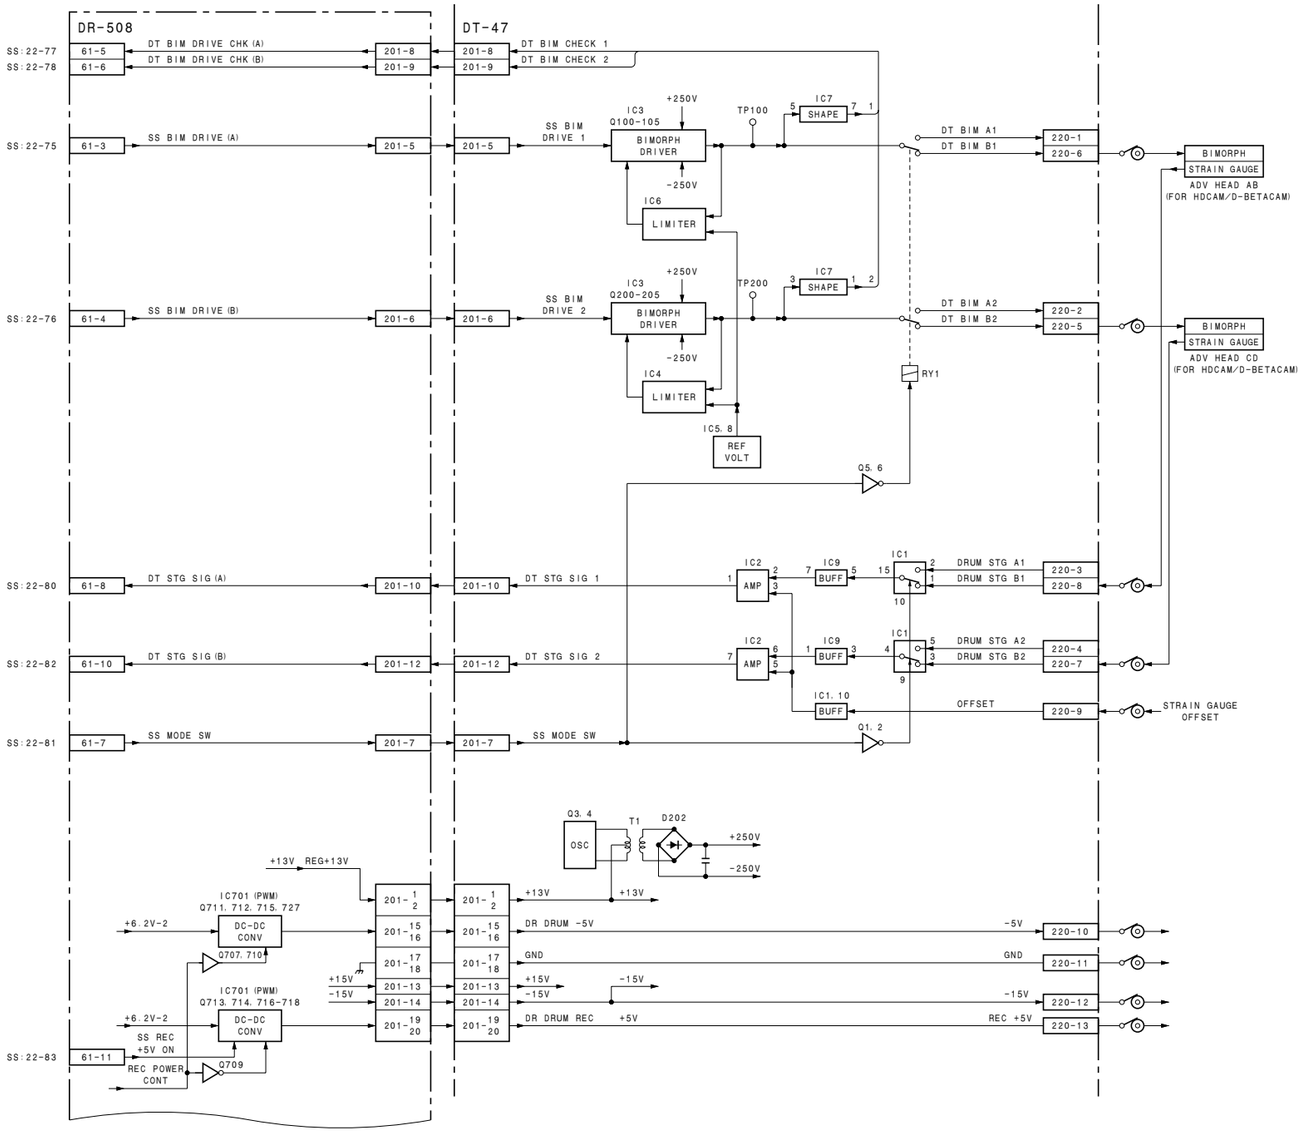
DR-508
DT-47
SS:22-77
61-5
DT BIM DRIVE CHK (A)
201-8
201-8
DT BIM CHECK 1
SS:22-78
61-6
DT BIM DRIVE CHK (B)
201-9
201-9
DT BIM CHECK 2
+250V
IC3
Q100-105
TP100
IC7
SHAPE
SS:22-75
61-3
SS BIM DRIVE (A)
201-5
201-5
SS BIM DRIVE 1
BIMORPH DRIVER
-250V
IC6
LIMITER
DT BIM A1
DT BIM B1
220-1
220-6
BIMORPH
STRAIN GAUGE
ADV HEAD AB
(FOR HDCAM/D-BETACAM)
+250V
IC3
Q200-205
TP200
IC7
SHAPE
SS:22-76
61-4
SS BIM DRIVE (B)
201-6
201-6
SS BIM DRIVE 2
BIMORPH DRIVER
-250V
IC4
LIMITER
DT BIM A2
DT BIM B2
220-2
220-5
BIMORPH
STRAIN GAUGE
ADV HEAD CD
(FOR HDCAM/D-BETACAM)
RY1
IC5. 8
REF VOLT
Q5. 6
SS:22-80
61-8
DT STG SIG (A)
201-10
201-10
DT STG SIG 1
IC2
AMP
IC9
BUFF
IC1
DRUM STG A1
DRUM STG B1
220-3
220-8
SS:22-82
61-10
DT STG SIG (B)
201-12
201-12
DT STG SIG 2
IC2
AMP
IC9
BUFF
IC1
DRUM STG A2
DRUM STG B2
220-4
220-7
IC1. 10
BUFF
OFFSET
220-9
STRAIN GAUGE OFFSET
SS:22-81
61-7
SS MODE SW
201-7
201-7
SS MODE SW
Q1. 2
Q3. 4
OSC
T1
D202
+250V
-250V
+13V REG+13V
201-1
201-2
+13V
+13V
IC701 (PWM)
Q711. 712. 715. 727
+6. 2V-2
DC-DC CONV
Q707. 710
DR DRUM -5V
-5V
220-10
GND
GND
220-11
+15V
-15V
201-15
201-16
201-17
201-18
201-13
201-14
+15V
-15V
+15V
-15V
-15V
220-12
IC701 (PWM)
Q713. 714. 716-718
+6. 2V-2
DC-DC CONV
SS REC +5V ON
Q709
REC POWER CONT
SS:22-83
61-11
201-19
201-20
DR DRUM REC
+5V
REC +5V
220-13

DT-47

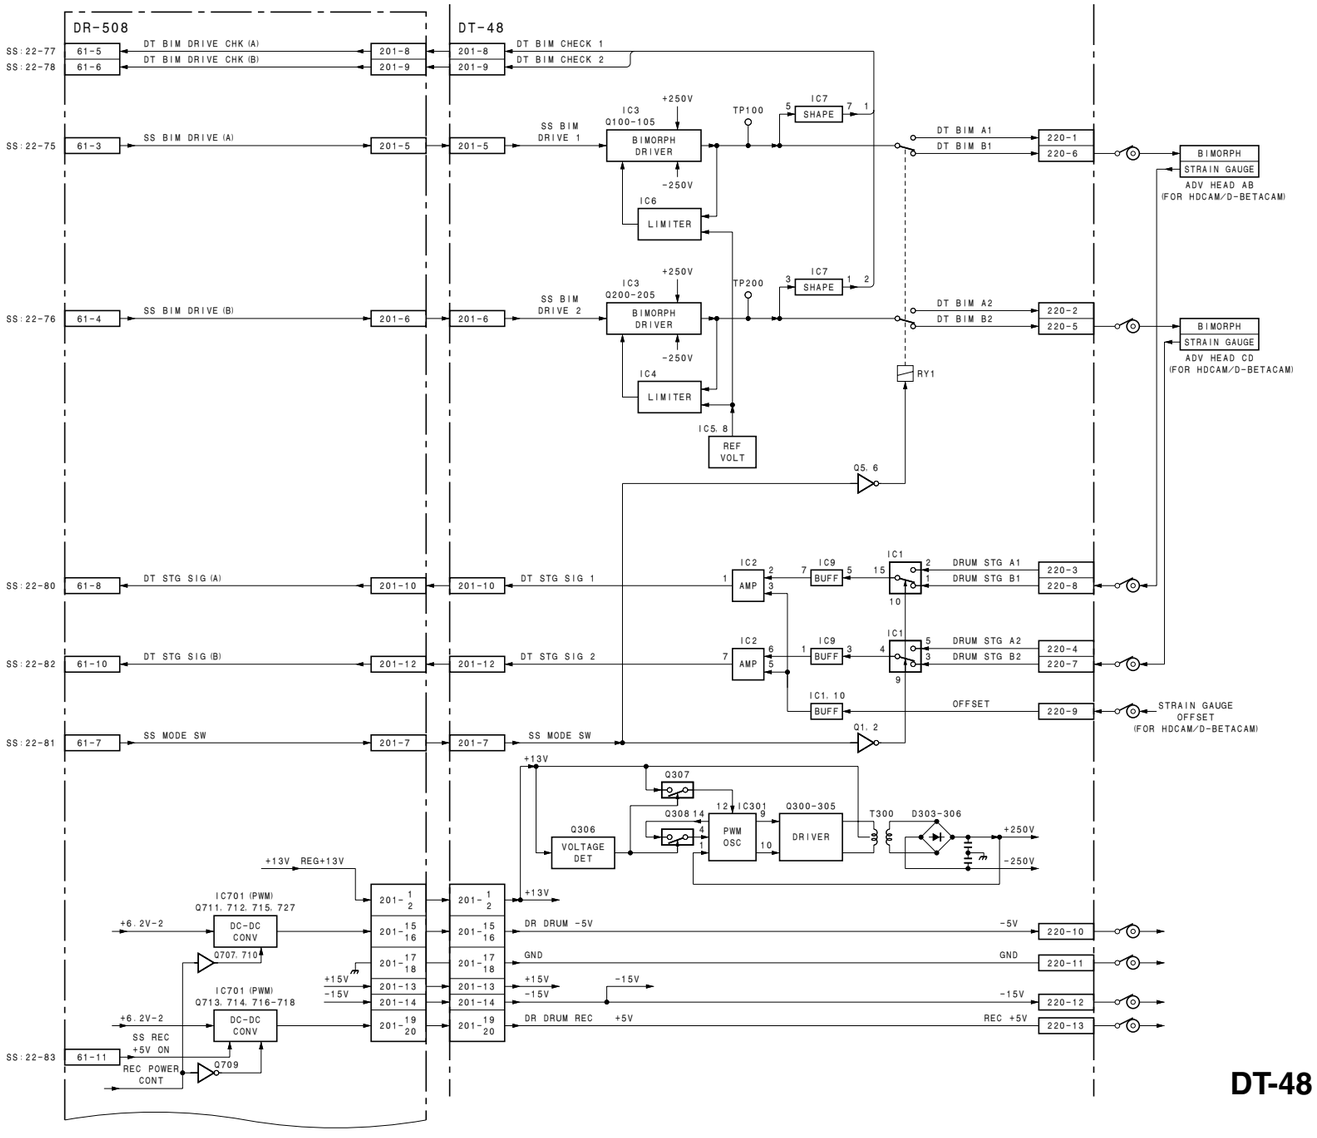
DR-508
DT-48
SS:22-77
SS:22-78
SS:22-75
SS:22-76
SS:22-80
SS:22-82
SS:22-81
SS:22-83
61-5
61-6
61-3
61-4
61-8
61-10
61-7
61-11
DT BIM DRIVE CHK (A)
DT BIM DRIVE CHK (B)
SS BIM DRIVE (A)
SS BIM DRIVE (B)
DT STG SIG (A)
DT STG SIG (B)
SS MODE SW
SS REC +5V ON
REC POWER CONT
201-8
201-9
201-5
201-6
201-10
201-12
201-7
201-1 2
201-15 16
201-17 18
201-13
201-14
201-19 20
DT BIM CHECK 1
DT BIM CHECK 2
SS BIM DRIVE 1
SS BIM DRIVE 2
IC3 Q100-105
IC3 Q200-205
BIMORPH DRIVER
+250V
-250V
IC6
LIMITER
IC4
IC5. 8
REF VOLT
TP100
TP200
IC7
SHAPE
RY1
Q5. 6
DT STG SIG 1
DT STG SIG 2
IC2
AMP
IC9
BUFF
IC1
IC1. 10
Q1. 2
OFFSET
DT BIM A1
DT BIM B1
DT BIM A2
DT BIM B2
DRUM STG A1
DRUM STG B1
DRUM STG A2
DRUM STG B2
220-1
220-6
220-2
220-5
220-3
220-8
220-4
220-7
220-9
BIMORPH
STRAIN GAUGE
ADV HEAD AB
(FOR HDCAM/D-BETACAM)
ADV HEAD CD
(FOR HDCAM/D-BETACAM)
STRAIN GAUGE OFFSET
(FOR HDCAM/D-BETACAM)
+13V
Q307
Q308
IC301
PWM OSC
Q300-305
DRIVER
T300
D303-306
Q306
VOLTAGE DET
+13V REG+13V
IC701 (PWM)
Q711. 712. 715. 727
DC-DC CONV
+6. 2V-2
Q707. 710
IC701 (PWM)
Q713. 714. 716-718
Q709
+15V
-15V
DR DRUM -5V
GND
DR REC +5V
-5V
REC +5V
220-10
220-11
220-12
220-13

DT-48

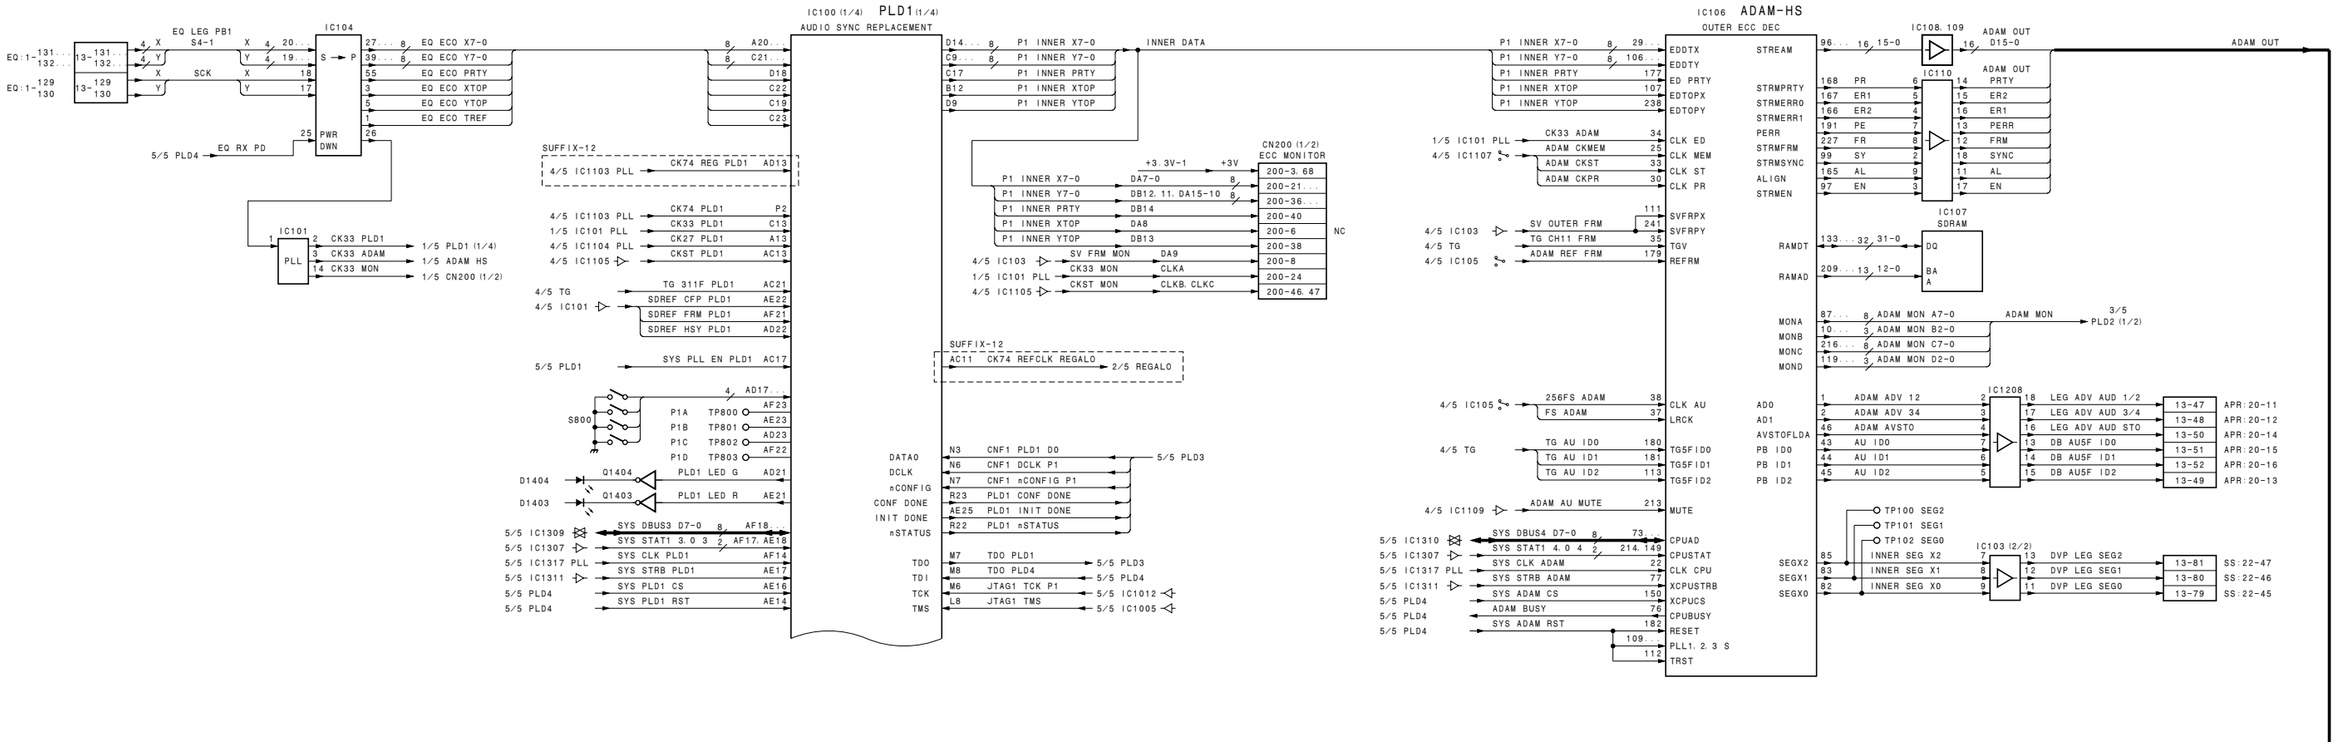

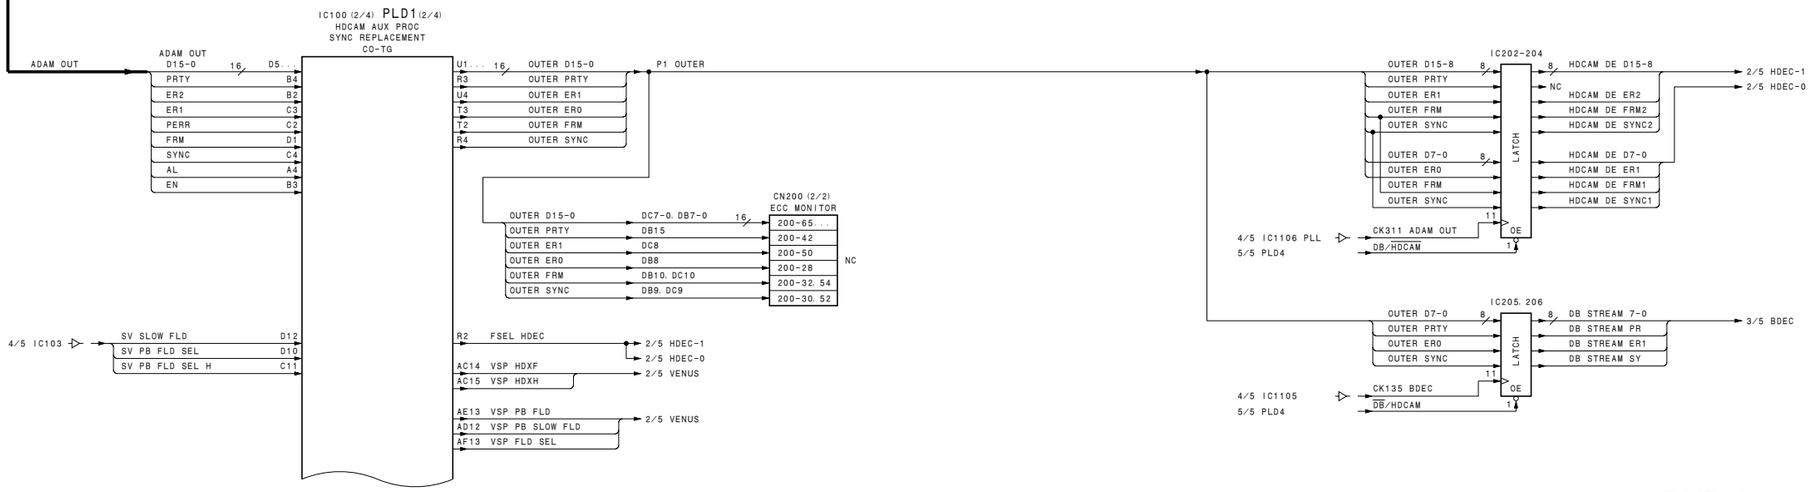

DVP-43 (1/5)
For HKSR-5802

DVP-43 (2/5)

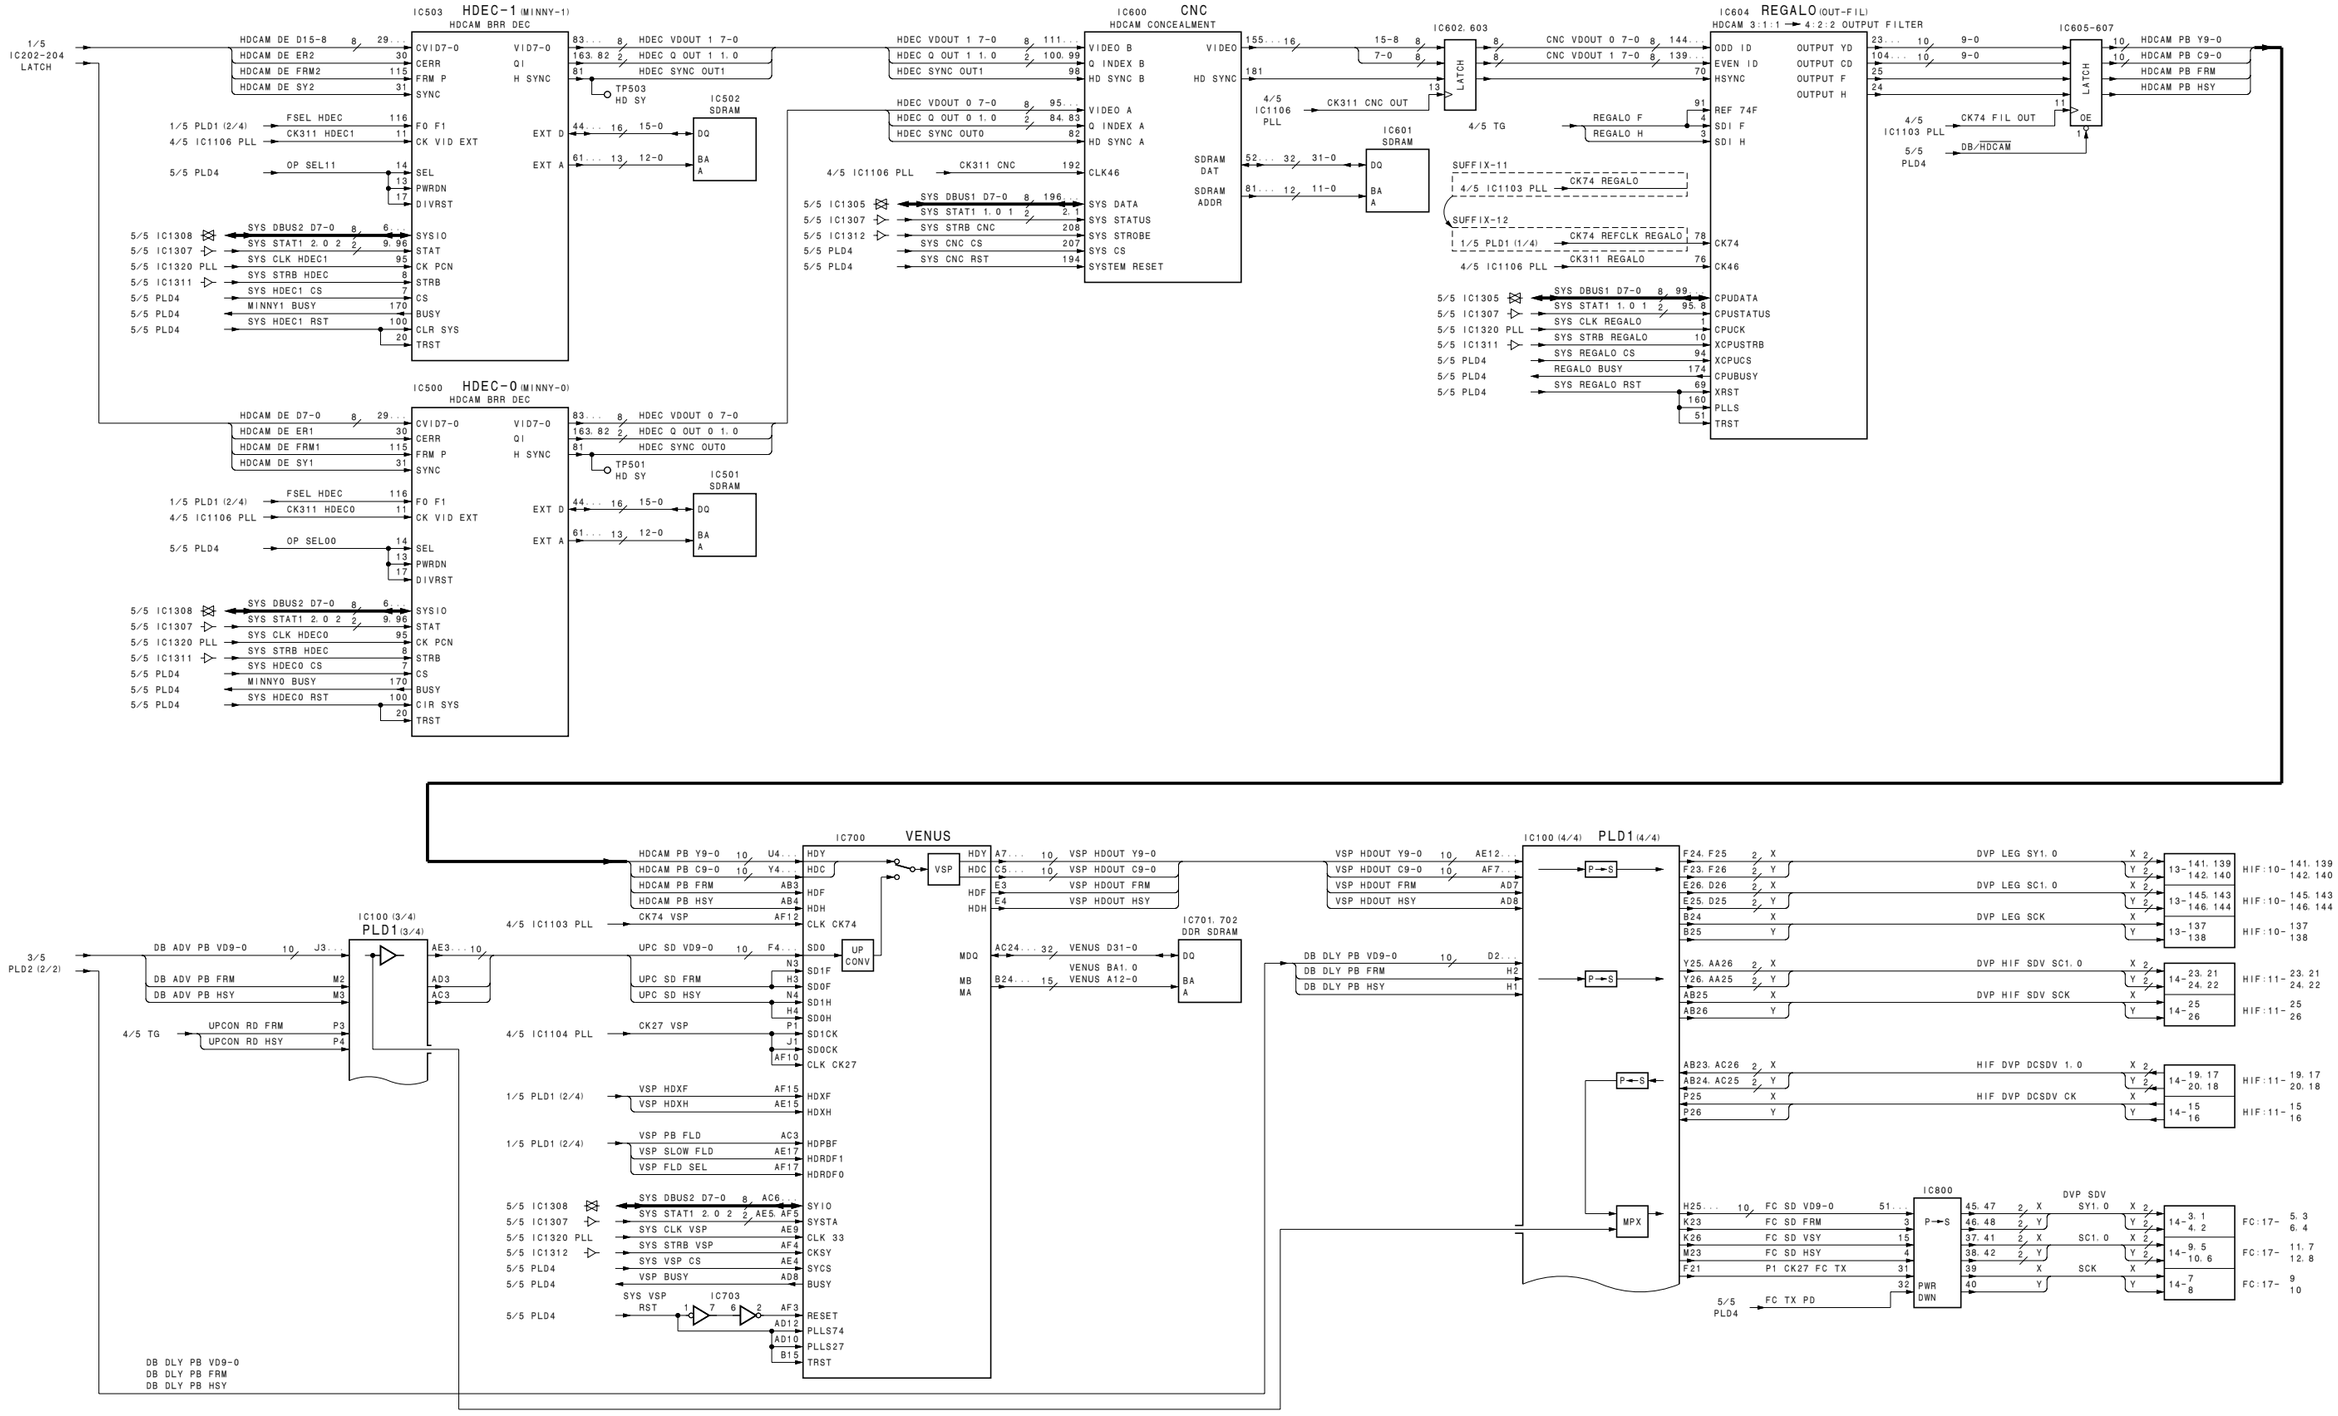

DVP-43 (2/5)
For HKSR-5802

3-31

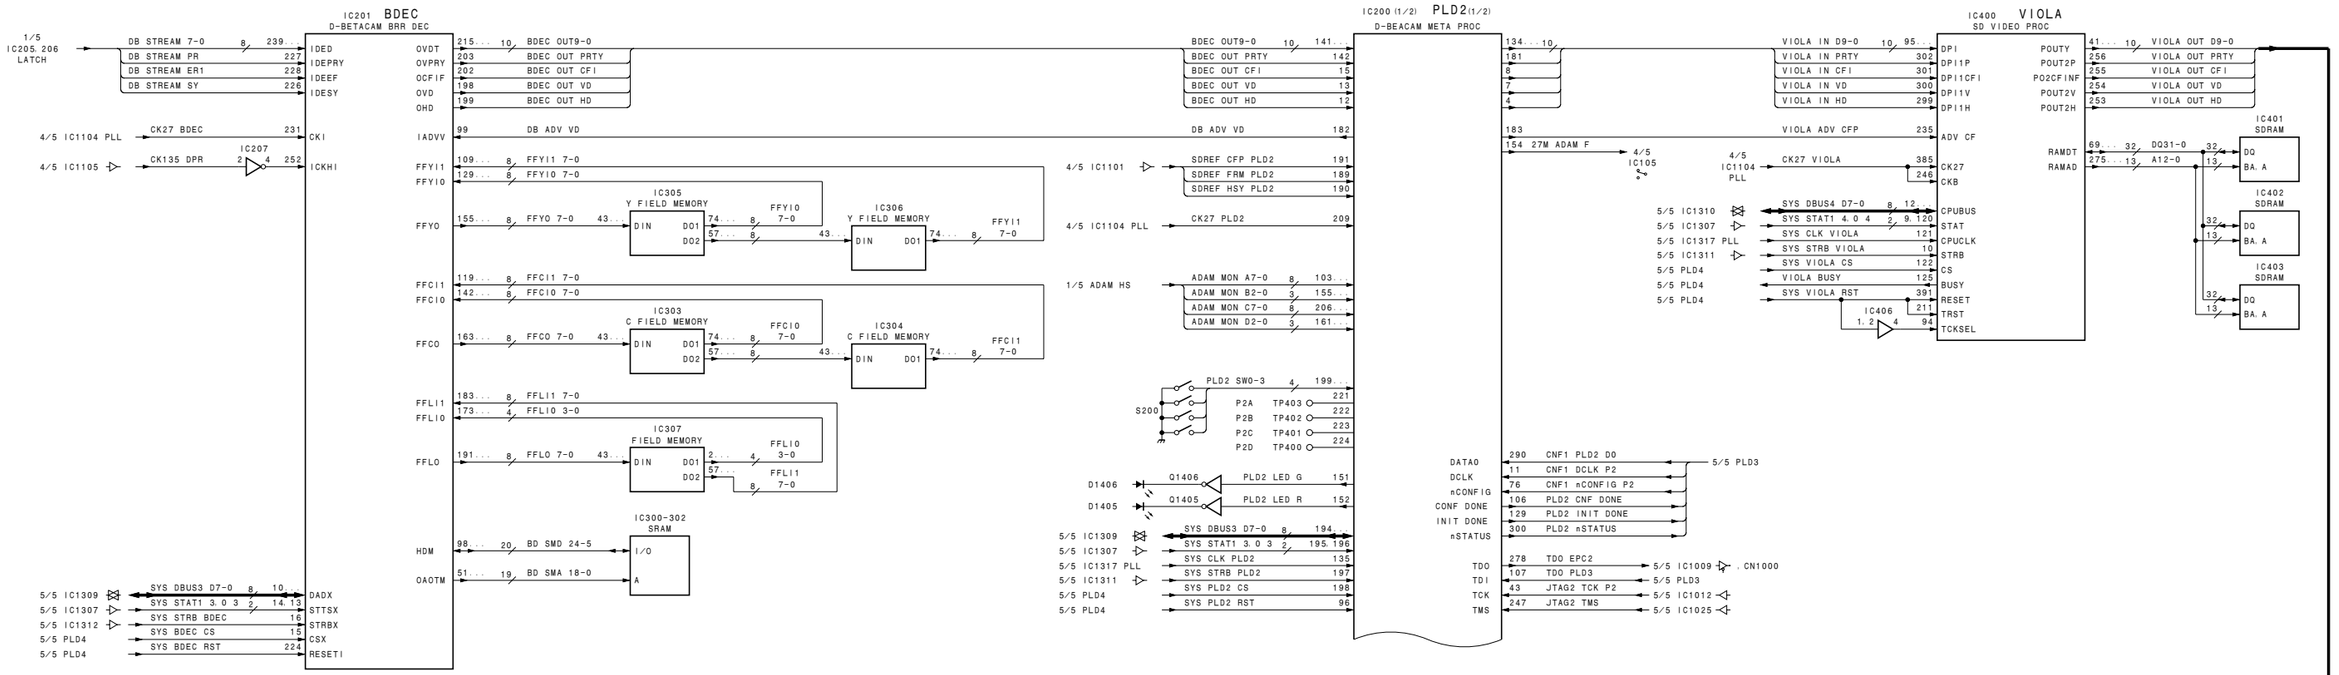

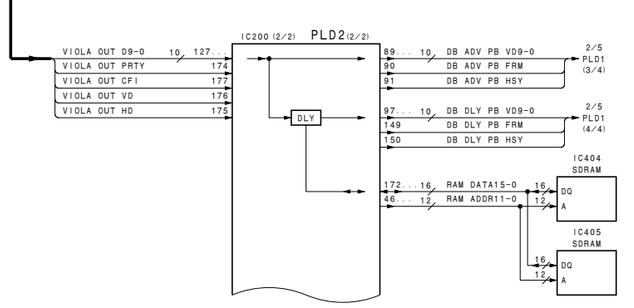

DVP-43 (3/5)
For HKSR-5802

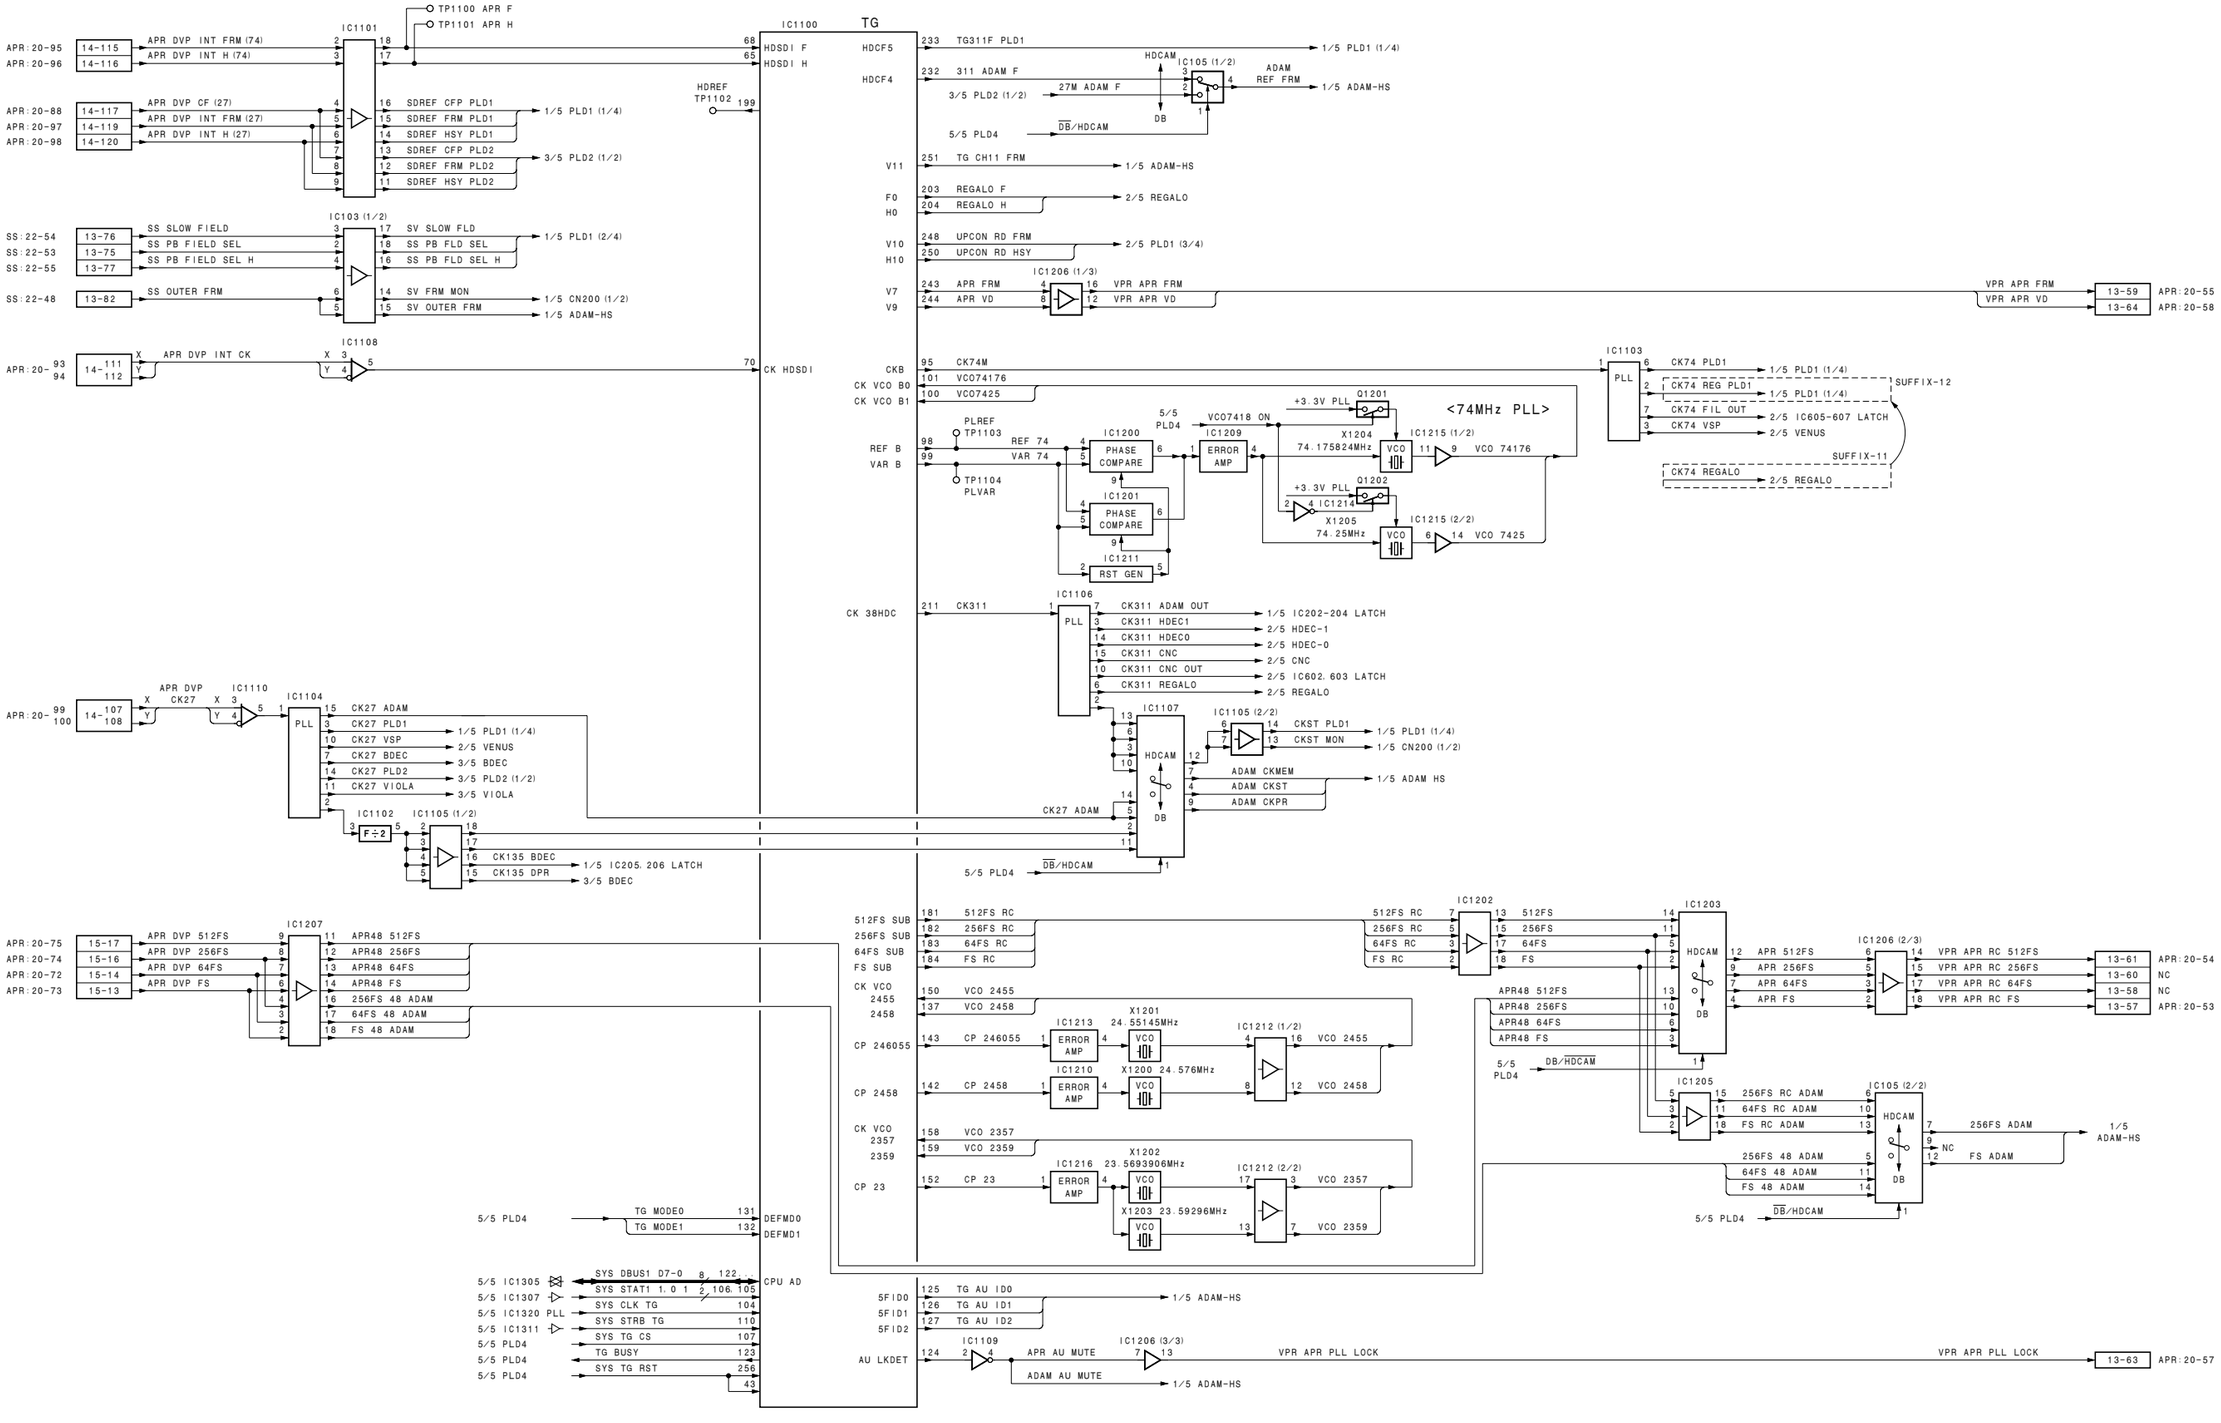

DVP-43 (4/5)
For HKSR-5802

DVP-43 (5/5)

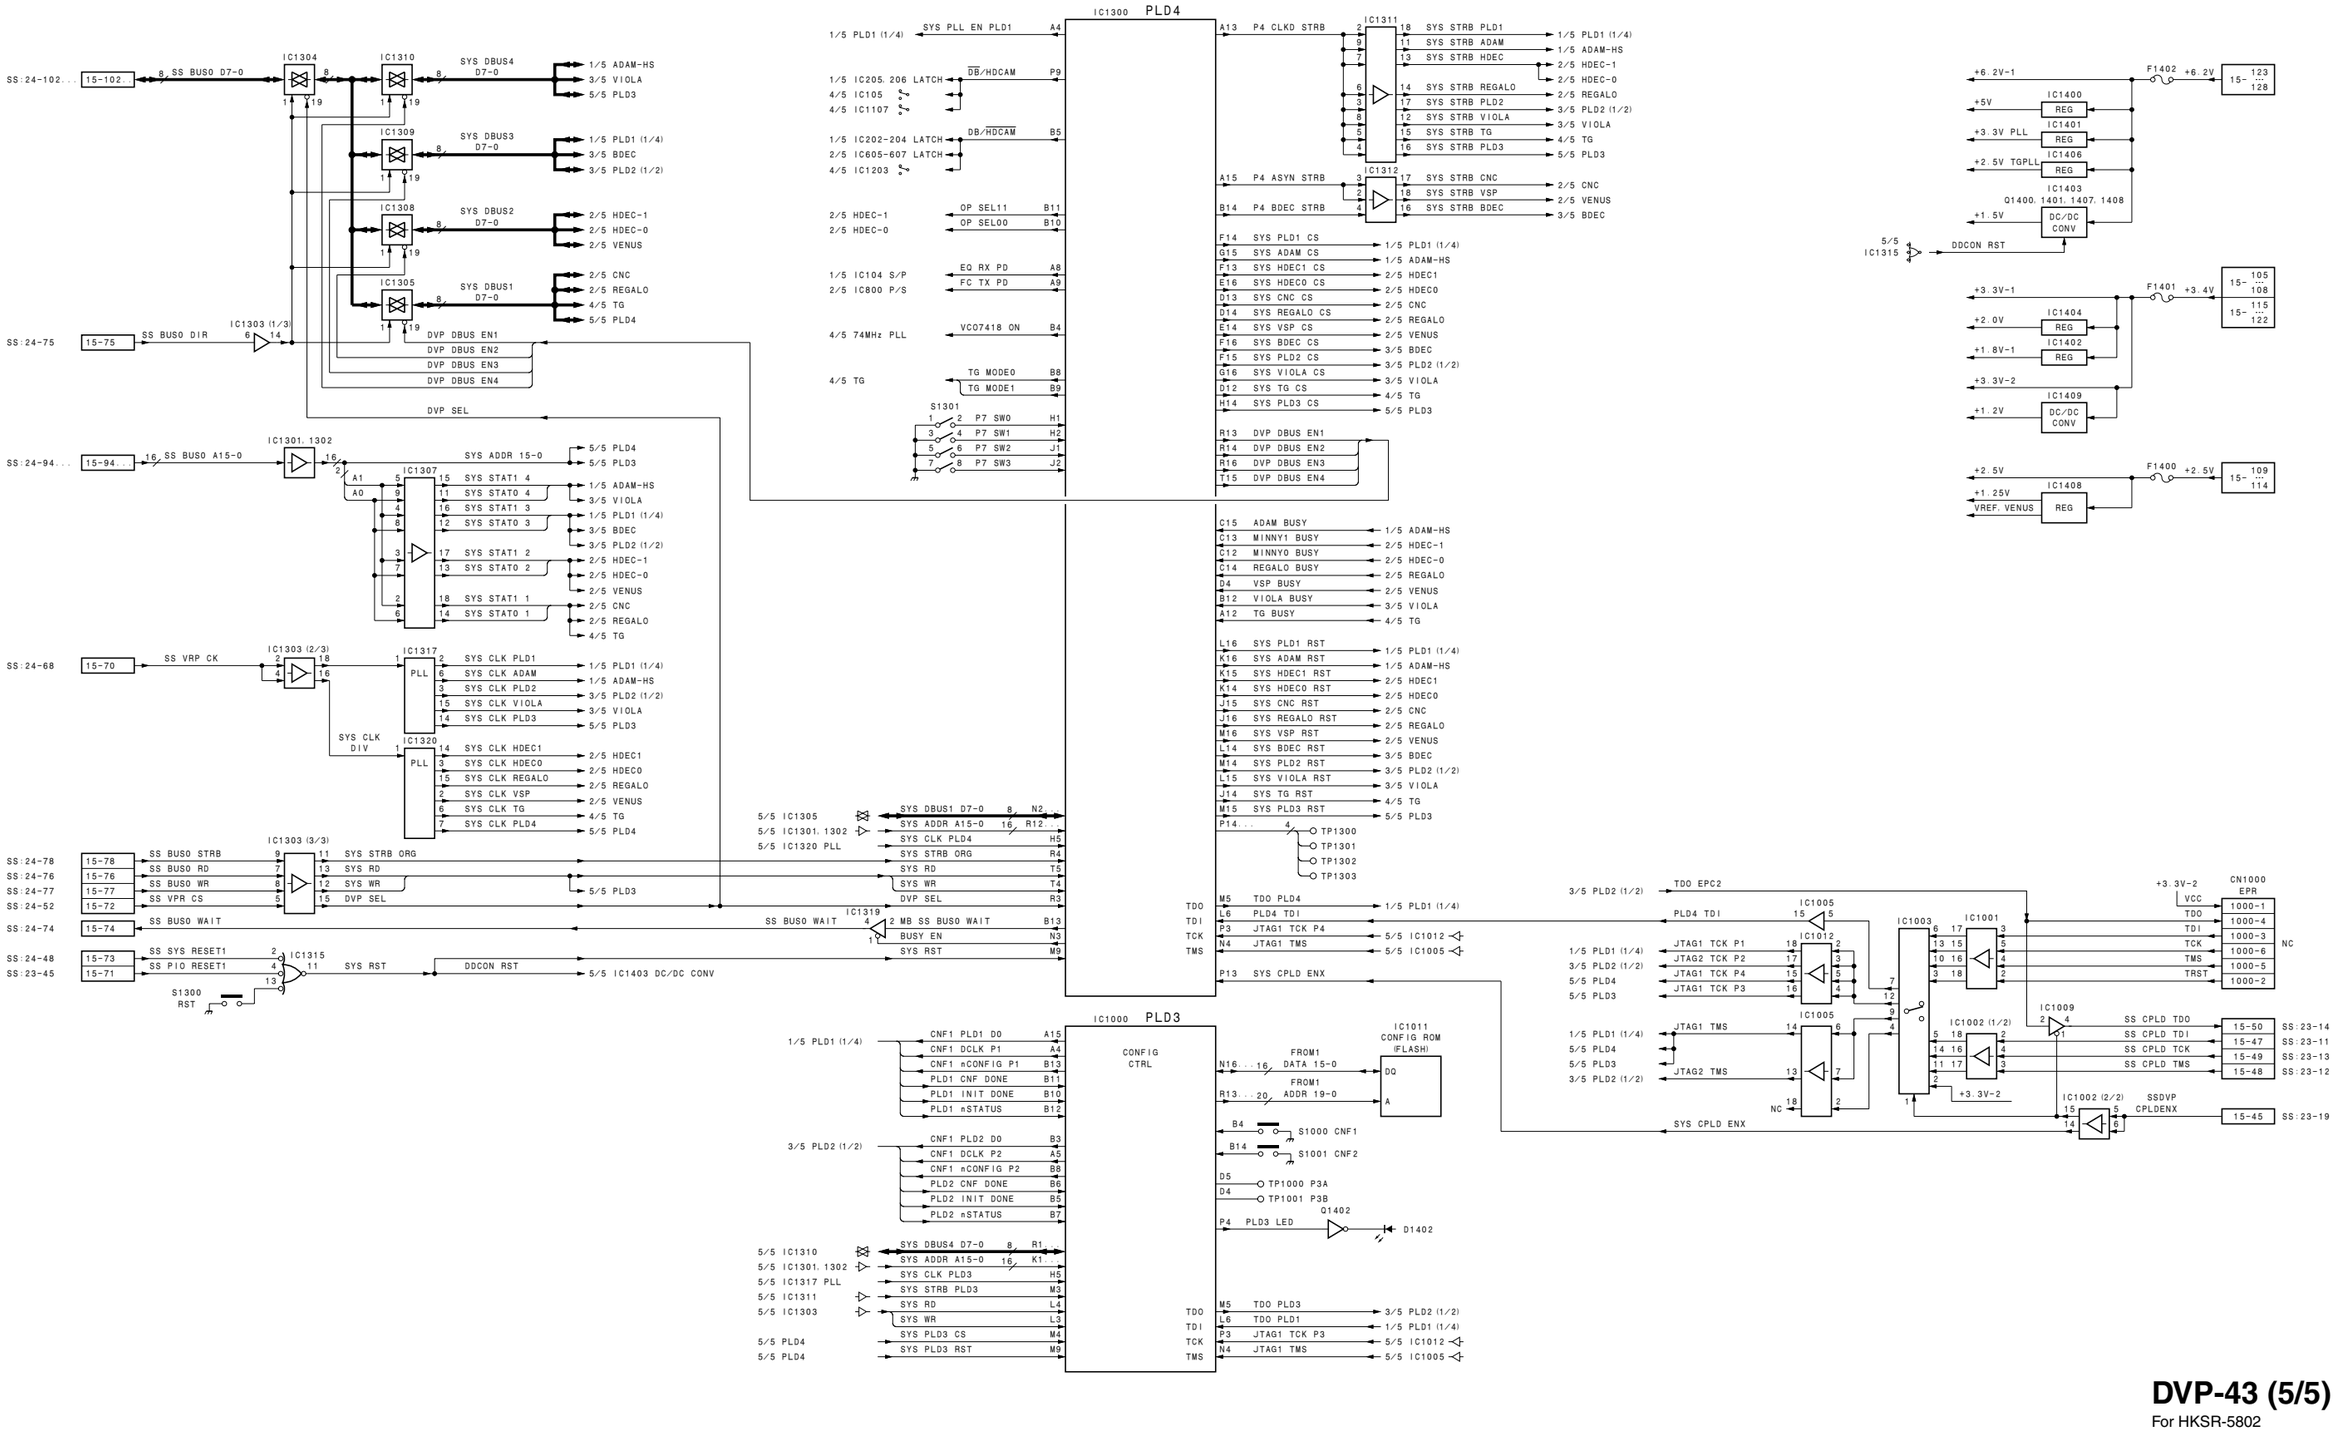

3-34

DVP-43 (5/5)
For HKSR-5802

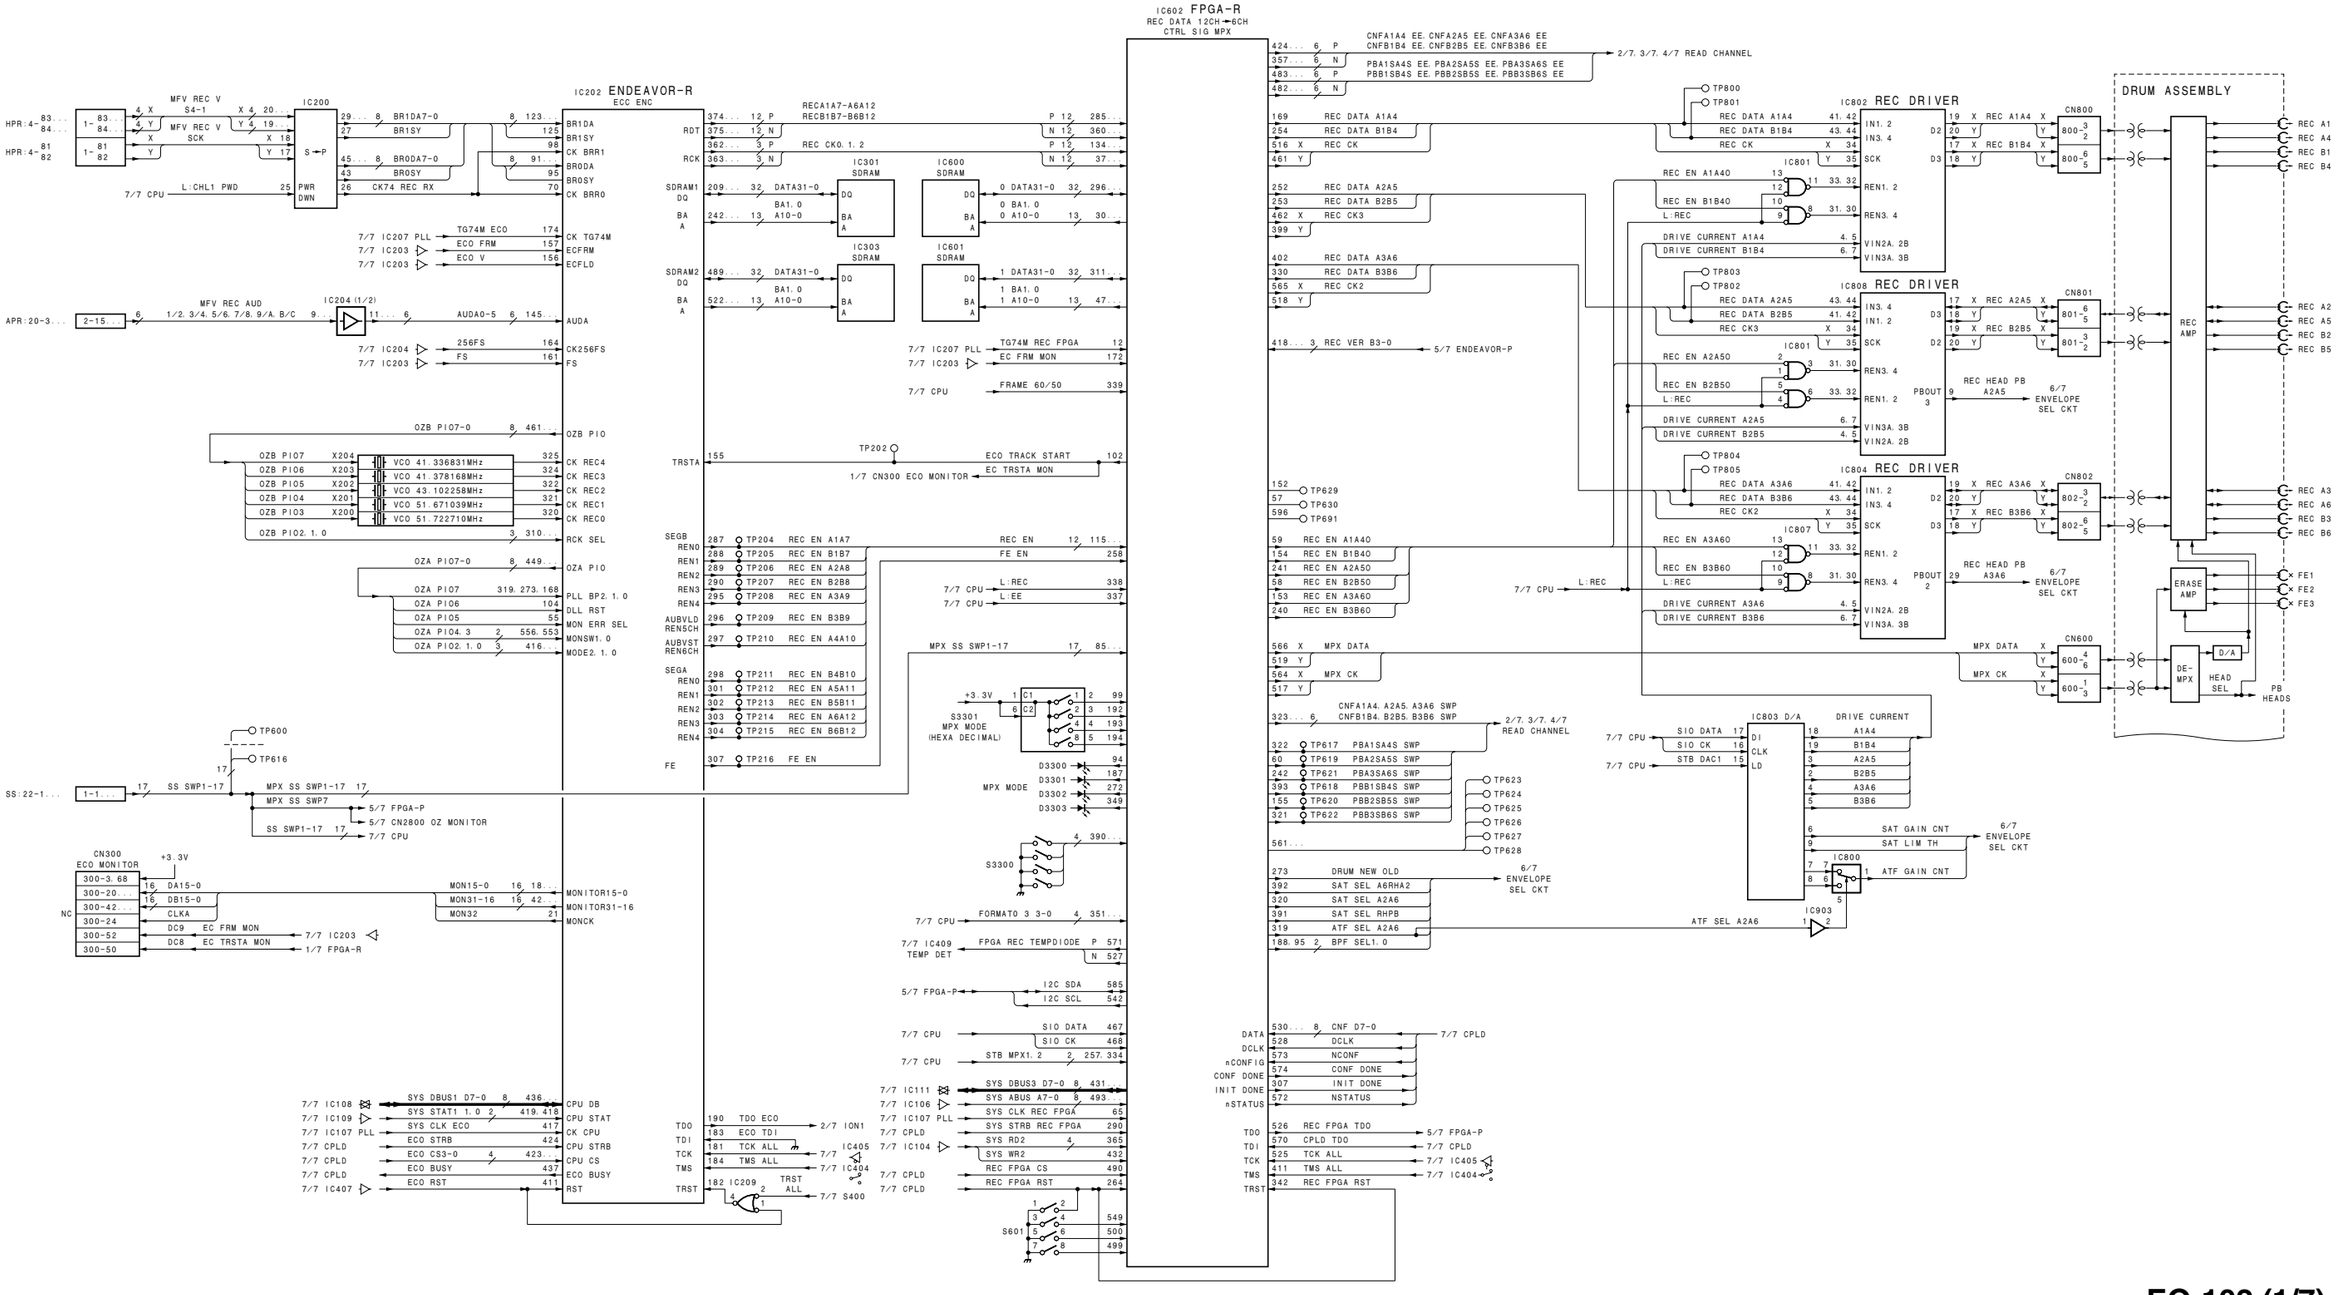
IC602 FPGA-R
REC DATA 12CH→6CH
CTRL SIG MPX
IC202 ENDEAVOR-R
ECC ENC
DRUM ASSEMBLY
REC AMP
ERASE AMP
DE-MPX
HEAD SEL
D/A
PB HEADS
IC802 REC DRIVER
IC804 REC DRIVER
IC808 REC DRIVER
IC801
IC807
IC803 D/A
IC800
IC903
CN800
CN801
CN802
CN600
REC A1
REC A4
REC B1
REC B4
REC A2
REC A5
REC B2
REC B5
REC A3
REC A6
REC B3
REC B6
FE1
FE2
FE3
REC DATA A1A4
REC DATA B1B4
REC CK
REC DATA A2A5
REC DATA B2B5
REC CK3
REC DATA A3A6
REC DATA B3B6
REC CK2
REC EN A1A4O
REC EN B1B4O
REC EN A2A5O
REC EN B2B5O
REC EN A3A6O
REC EN B3B6O
DRIVE CURRENT A1A4
DRIVE CURRENT B1B4
DRIVE CURRENT A2A5
DRIVE CURRENT B2B5
DRIVE CURRENT A3A6
DRIVE CURRENT B3B6
REC HEAD PB A2A5
REC HEAD PB A3A6
6/7 ENVELOPE SEL CKT
MPX DATA
MPX CK
CNFA1A4. A2A5. A3A6 SWP
CNFB1B4. B2B5. B3B6 SWP
PBA1SA4S SWP
PBA2SA5S SWP
PBA3SA6S SWP
PBB1SB4S SWP
PBB2SB5S SWP
PBB3SB6S SWP
DRUM NEW OLD
SAT SEL A6RHA2
SAT SEL A2A6
SAT SEL RHPB
ATF SEL A2A6
BPF SEL1. 0
SAT GAIN CNT
SAT LIM TH
ATF GAIN CNT
ATF SEL A2A6
SIO DATA
SIO CK
STB DAC1
DRIVE CURRENT
A1A4
B1B4
A2A5
B2B5
A3A6
B3B6
2/7. 3/7. 4/7 READ CHANNEL
5/7 ENDEAVOR-P
7/7 CPU
L:REC
MFV REC V
MFV REC AUD
MFV REC V SCK
S4-1
IC200
IC204(1/2)
BR1DA7-0
BR1SY
BR0DA7-0
BR0SY
CK74 REC RX
PWR DWN
L:CHL1 PWD
AUDA0-5
AUDA
CK256FS
FS
TG74M ECO
ECO FRM
ECO V
CK TG74M
ECFRM
ECFLD
OZB PIO7-0
OZB PIO
OZB PIO6
OZB PIO5
OZB PIO4
OZB PIO3
OZB PIO2. 1. 0
VCO 41.336831MHz
VCO 41.378168MHz
VCO 43.102258MHz
VCO 51.671039MHz
VCO 51.722710MHz
CK REC4
CK REC3
CK REC2
CK REC1
CK REC0
RCK SEL
OZA PIO7-0
OZA PIO
OZA PIO6
OZA PIO5
OZA PIO4. 3
OZA PIO2. 1. 0
PLL BP2. 1. 0
DLL RST
MON ERR SEL
MONSW1. 0
MODE2. 1. 0
IC301 SDRAM
IC303 SDRAM
IC600 SDRAM
IC601 SDRAM
SDRAM1 DQ
SDRAM2 DQ
BA
A
DATA31-0
A10-0
BA1. 0
0 DATA31-0
0 A10-0
1 DATA31-0
1 A10-0
RECA1A7-A6A12
RECB1B7-B6B12
REC CK0. 1. 2
RDT
RCK
TRSTA
TP202
ECO TRACK START
EC TRSTA MON
1/7 CN300 ECO MONITOR
TG74M REC FPGA
EC FRM MON
FRAME 60/50
SEGB REN0
REN1
REN2
REN3
REN4
AUBVLD REN5CH
AUBVST REN6CH
SEGA REN0
REN1
REN2
REN3
REN4
FE
TP204 REC EN A1A7
TP205 REC EN B1B7
TP206 REC EN A2A8
TP207 REC EN B2B8
TP208 REC EN A3A9
TP209 REC EN B3B9
TP210 REC EN A4A10
TP211 REC EN B4B10
TP212 REC EN A5A11
TP213 REC EN B5B11
TP214 REC EN A6A12
TP215 REC EN B6B12
TP216 FE EN
REC EN
FE EN
L:REC
L:EE
MPX SS SWP1-17
S3301
MPX MODE (HEXA DECIMAL)
D3300
D3301
D3302
D3303
S3300
FORMAT0 3 3-0
FPGA REC TEMPDIODE P
N
I2C SDA
I2C SCL
SIO DATA
SIO CK
STB MPX1. 2
SYS DBUS3 D7-0
SYS ABUS A7-0
SYS CLK REC FPGA
SYS STRB REC FPGA
SYS RD2
SYS WR2
REC FPGA CS
REC FPGA RST
S601
TP617 PBA1SA4S SWP
TP619 PBA2SA5S SWP
TP621 PBA3SA6S SWP
TP618 PBB1SB4S SWP
TP620 PBB2SB5S SWP
TP622 PBB3SB6S SWP
TP623
TP624
TP625
TP626
TP627
TP628
TP800
TP801
TP802
TP803
TP804
TP805
TP629
TP630
TP691
TP600
TP616
SS:22-1...
SS SWP1-17
MPX SS SWP7
5/7 FPGA-P
5/7 CN2800 OZ MONITOR
7/7 CPU
CN300 ECO MONITOR
+3.3V
DA15-0
DB15-0
CLKA
DC9 EC FRM MON
DC8 EC TRSTA MON
7/7 IC203
1/7 FPGA-R
MON15-0
MON31-16
MON32
MONITOR15-0
MONITOR31-16
MONCK
CPU DB
CPU STAT
CK CPU
CPU STRB
CPU CS
ECO BUSY
RST
SYS DBUS1 D7-0
SYS STAT1 1. 0
SYS CLK ECO
ECO STRB
ECO CS3-0
ECO BUSY
ECO RST
TDO ECO
TDI ECO TDI
TCK TCK ALL
TMS TMS ALL
TRST IC209
TRST ALL
7/7 S400
2/7 ION1
7/7 IC405
7/7 IC404
DATA
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
CNF D7-0
NCONF
CONF DONE
INIT DONE
NSTATUS
7/7 CPLD
REC FPGA TDO
CPLD TDO
5/7 FPGA-P
7/7 CPLD
7/7 IC405
7/7 IC404

EQ-102 (1/7)

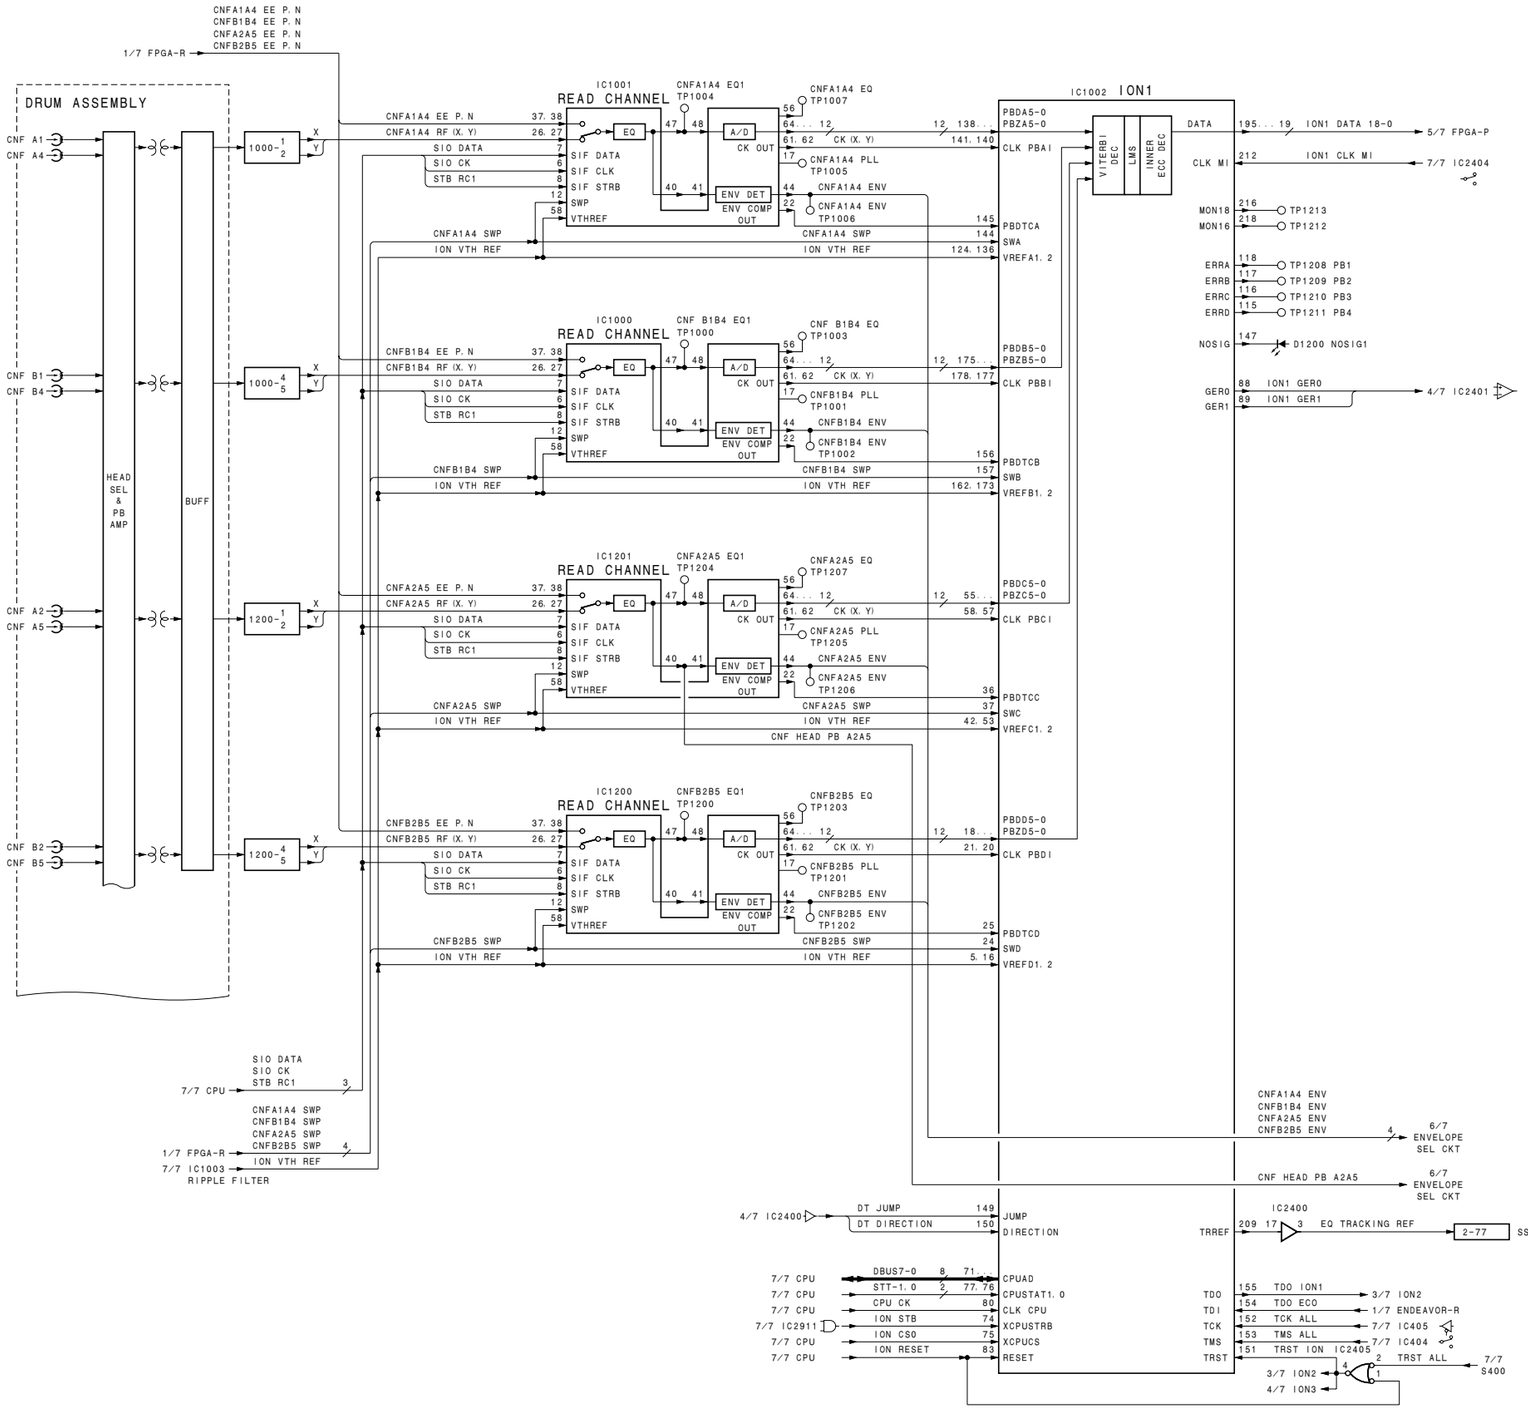
CNFA1A4 EE P. N
CNFB1B4 EE P. N
CNFA2A5 EE P. N
CNFB2B5 EE P. N
1/7 FPGA-R
DRUM ASSEMBLY
CNF A1
CNF A4
CNF B1
CNF B4
CNF A2
CNF A5
CNF B2
CNF B5
HEAD SEL & PB AMP
BUFF
1000-1/2
1000-4/5
1200-1/2
1200-4/5
IC1001 READ CHANNEL
IC1000 READ CHANNEL
IC1201 READ CHANNEL
IC1200 READ CHANNEL
CNFA1A4 EQ1 TP1004
CNF B1B4 EQ1 TP1000
CNFA2A5 EQ1 TP1204
CNFB2B5 EQ1 TP1200
CNFA1A4 EQ TP1007
CNF B1B4 EQ TP1003
CNFA2A5 EQ TP1207
CNFB2B5 EQ TP1203
CNFA1A4 PLL TP1005
CNFB1B4 PLL TP1001
CNFA2A5 PLL TP1205
CNFB2B5 PLL TP1201
CNFA1A4 ENV TP1006
CNFB1B4 ENV TP1002
CNFA2A5 ENV TP1206
CNFB2B5 ENV TP1202
CNFA1A4 RF (X, Y)
CNFB1B4 RF (X, Y)
CNFA2A5 RF (X, Y)
CNFB2B5 RF (X, Y)
SIO DATA
SIO CK
STB RC1
SIF DATA
SIF CLK
SIF STRB
SWP
VTHREF
EQ
A/D
CK OUT
CK (X, Y)
ENV DET
ENV COMP OUT
CNFA1A4 SWP
CNFB1B4 SWP
CNFA2A5 SWP
CNFB2B5 SWP
ION VTH REF
CNF HEAD PB A2A5
IC1002 ION1
VITERBI DEC
LMS
INNER ECC DEC
PBDA5-0
PBZA5-0
PBDB5-0
PBZB5-0
PBDC5-0
PBZC5-0
PBDD5-0
PBZD5-0
CLK PBAI
CLK PBBI
CLK PBCI
CLK PBDI
PBDTCA
PBDTCB
PBDTCC
PBDTCD
SWA
SWB
SWC
SWD
VREFA1, 2
VREFB1, 2
VREFC1, 2
VREFD1, 2
DATA
CLK MI
ION1 DATA 18-0
ION1 CLK MI
5/7 FPGA-P
7/7 IC2404
MON18
MON16
TP1213
TP1212
ERRA
ERRB
ERRC
ERRD
TP1208 PB1
TP1209 PB2
TP1210 PB3
TP1211 PB4
NOSIG
D1200 NOSIG1
GER0
GER1
ION1 GER0
ION1 GER1
4/7 IC2401
SIO DATA
SIO CK
STB RC1
7/7 CPU
CNFA1A4 SWP
CNFB1B4 SWP
CNFA2A5 SWP
CNFB2B5 SWP
1/7 FPGA-R
ION VTH REF
7/7 IC1003
RIPPLE FILTER
CNFA1A4 ENV
CNFB1B4 ENV
CNFA2A5 ENV
CNFB2B5 ENV
6/7 ENVELOPE SEL CKT
CNF HEAD PB A2A5
6/7 ENVELOPE SEL CKT
4/7 IC2400
DT JUMP
DT DIRECTION
JUMP
DIRECTION
IC2400
TRREF
EQ TRACKING REF
2-77
SS:22-67
DBUS7-0
STT-1, 0
CPU CK
ION STB
ION CS0
ION RESET
CPUAD
CPUSTAT1, 0
CLK CPU
XCPUSTRB
XCPUCS
RESET
7/7 IC2911
TDO
TDI
TCK
TMS
TRST
TDO ION1
TDO ECO
TCK ALL
TMS ALL
TRST ION IC2405
TRST ALL
3/7 ION2
4/7 ION3
3/7 ION2
1/7 ENDEAVOR-R
7/7 IC405
7/7 IC404
7/7 S400

EQ-102 (2/7)

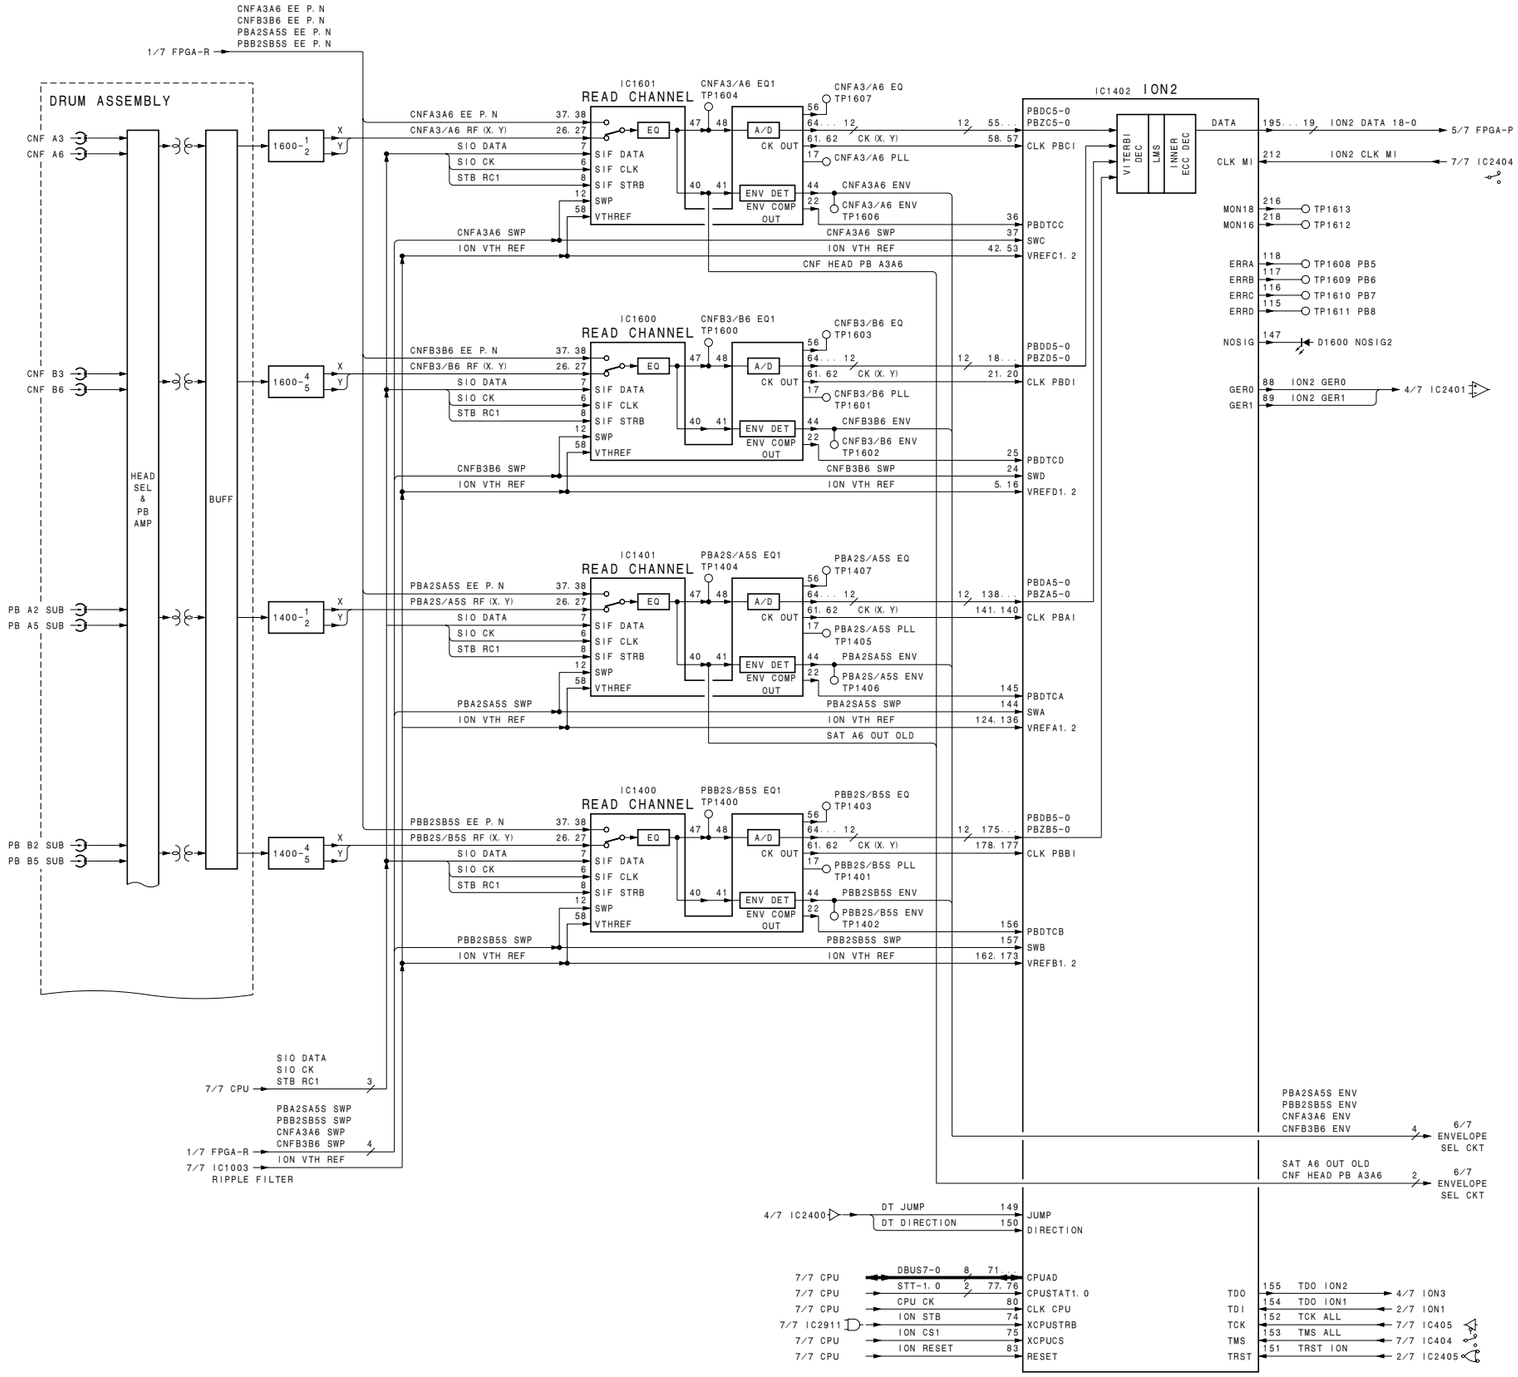
CNFA3A6 EE P. N
CNFB3B6 EE P. N
PBA2SA5S EE P. N
PBB2SB5S EE P. N
1/7 FPGA-R
DRUM ASSEMBLY
CNF A3
CNF A6
CNF B3
CNF B6
PB A2 SUB
PB A5 SUB
PB B2 SUB
PB B5 SUB
HEAD SEL & PB AMP
BUFF
1600-1/2
1600-4/5
1400-1/2
1400-4/5
X
Y
IC1601
READ CHANNEL
CNFA3/A6 EQ1 TP1604
CNFA3/A6 EQ TP1607
CNFA3A6 EE P. N
CNFA3/A6 RF (X. Y)
SIO DATA
SIO CK
STB RC1
EQ
A/D
CK OUT
SIF DATA
SIF CLK
SIF STRB
SWP
VTHREF
ENV DET
ENV COMP OUT
CK (X. Y)
CNFA3/A6 PLL
CNFA3/A6 ENV
CNFA3/A6 ENV TP1606
CNFA3A6 SWP
ION VTH REF
CNF HEAD PB A3A6
IC1600
READ CHANNEL
CNFB3/B6 EQ1 TP1600
CNFB3/B6 EQ TP1603
CNFB3B6 EE P. N
CNFB3/B6 RF (X. Y)
CNFB3/B6 PLL TP1601
CNFB3B6 ENV
CNFB3/B6 ENV TP1602
CNFB3B6 SWP
IC1401
READ CHANNEL
PBA2S/A5S EQ1 TP1404
PBA2S/A5S EQ TP1407
PBA2SA5S EE P. N
PBA2S/A5S RF (X. Y)
PBA2S/A5S PLL TP1405
PBA2SA5S ENV
PBA2S/A5S ENV TP1406
PBA2SA5S SWP
SAT A6 OUT OLD
IC1400
READ CHANNEL
PBB2S/B5S EQ1 TP1400
PBB2S/B5S EQ TP1403
PBB2SB5S EE P. N
PBB2S/B5S RF (X. Y)
PBB2S/B5S PLL TP1401
PBB2SB5S ENV
PBB2S/B5S ENV TP1402
PBB2SB5S SWP
IC1402 ION2
PBDC5-0
PBZC5-0
CLK PBCI
PBDD5-0
PBZD5-0
CLK PBDI
PBDA5-0
PBZA5-0
CLK PBAI
PBDB5-0
PBZB5-0
CLK PBBI
PBDTCC
SWC
VREFC1, 2
PBDTCD
SWD
VREFD1, 2
PBDTCA
SWA
VREFA1, 2
PBDTCB
SWB
VREFB1, 2
VITERBI DEC
LMS
INNER ECC DEC
DATA
ION2 DATA 18-0
5/7 FPGA-P
CLK MI
ION2 CLK MI
7/7 IC2404
MON18
MON16
TP1613
TP1612
ERRA
ERRB
ERRC
ERRD
TP1608 PB5
TP1609 PB6
TP1610 PB7
TP1611 PB8
NOSIG
D1600 NOSIG2
GER0
GER1
ION2 GER0
ION2 GER1
4/7 IC2401
7/7 CPU
SIO DATA
SIO CK
STB RC1
PBA2SA5S SWP
PBB2SB5S SWP
CNFA3A6 SWP
CNFB3B6 SWP
1/7 FPGA-R
7/7 IC1003
ION VTH REF
RIPPLE FILTER
PBA2SA5S ENV
PBB2SB5S ENV
CNFA3A6 ENV
CNFB3B6 ENV
6/7 ENVELOPE SEL CKT
SAT A6 OUT OLD
CNF HEAD PB A3A6
4/7 IC2400
DT JUMP
DT DIRECTION
JUMP
DIRECTION
DBUS7-0
CPUAD
STT-1, 0
CPUSTAT1, 0
CPU CK
CLK CPU
ION STB
XCPUSTRB
ION CS1
XCPUCS
ION RESET
RESET
7/7 IC2911
TDO
TDI
TCK
TMS
TRST
TDO ION2
TDO ION1
TCK ALL
TMS ALL
TRST ION
4/7 ION3
2/7 ION1
7/7 IC405
7/7 IC404
2/7 IC2405

EQ-102 (3/7)

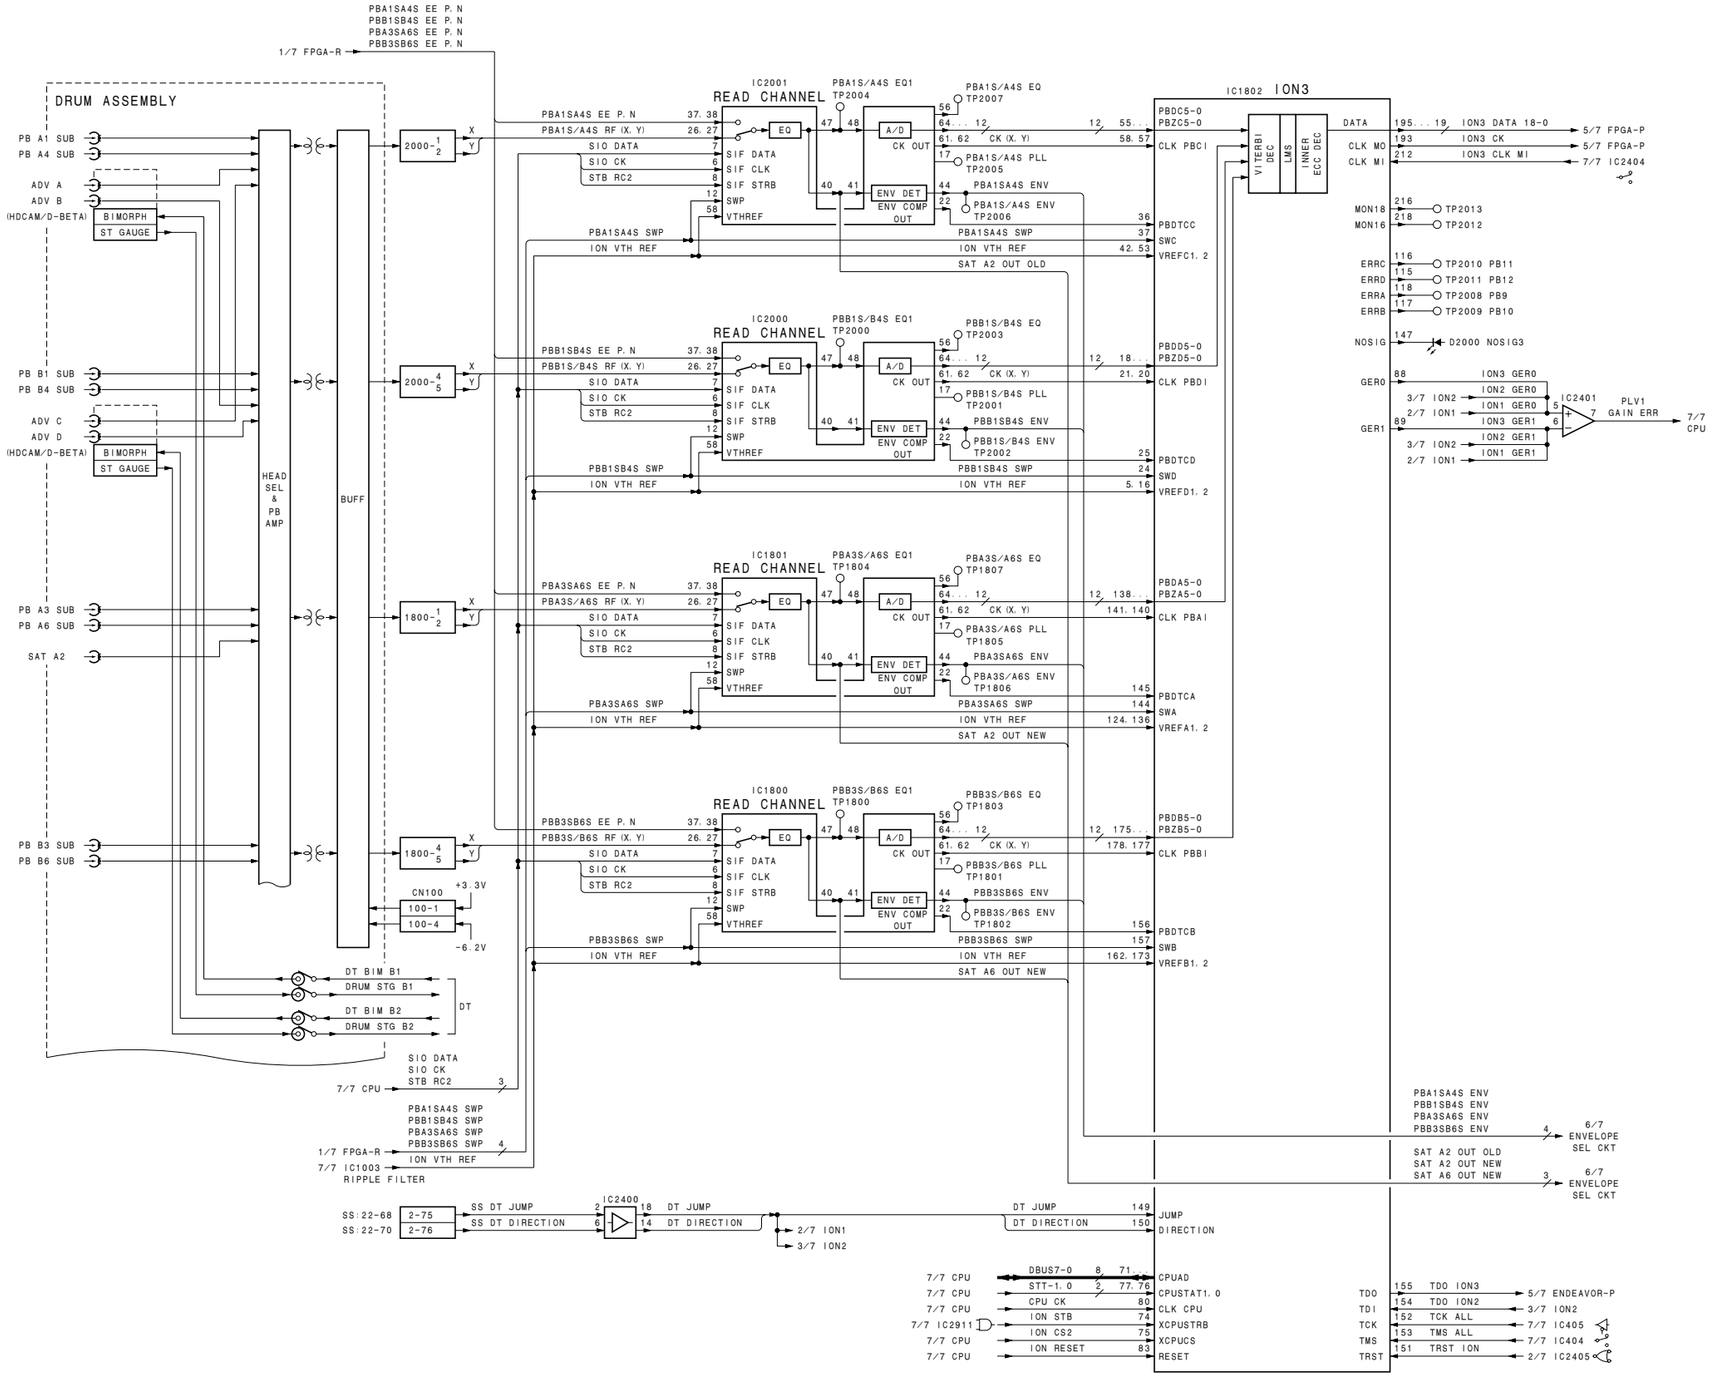
PBA1SA4S EE P. N
PBB1SB4S EE P. N
PBA3SA6S EE P. N
PBB3SB6S EE P. N
1/7 FPGA-R
DRUM ASSEMBLY
PB A1 SUB
PB A4 SUB
ADV A
ADV B
(HDCAM/D-BETA)
BIMORPH
ST GAUGE
PB B1 SUB
PB B4 SUB
ADV C
ADV D
PB A3 SUB
PB A6 SUB
SAT A2
PB B3 SUB
PB B6 SUB
HEAD SEL & PB AMP
BUFF
2000-1 2
2000-4 5
1800-1 2
1800-4 5
X
Y
CN100
100-1
100-4
+3.3V
-6.2V
DT BIM B1
DRUM STG B1
DT BIM B2
DRUM STG B2
DT
IC2001
READ CHANNEL
PBA1S/A4S EQ1
TP2004
PBA1S/A4S EQ
TP2007
PBA1S/A4S PLL
TP2005
PBA1S/A4S ENV
TP2006
IC2000
PBB1S/B4S EQ1
TP2000
PBB1S/B4S EQ
TP2003
PBB1S/B4S PLL
TP2001
PBB1SB4S ENV
PBB1S/B4S ENV
TP2002
IC1801
PBA3S/A6S EQ1
TP1804
PBA3S/A6S EQ
TP1807
PBA3S/A6S PLL
TP1805
PBA3SA6S ENV
PBA3S/A6S ENV
TP1806
IC1800
PBB3S/B6S EQ1
TP1800
PBB3S/B6S EQ
TP1803
PBB3S/B6S PLL
TP1801
PBB3SB6S ENV
PBB3S/B6S ENV
TP1802
EQ
A/D
CK OUT
ENV DET
ENV COMP OUT
SIO DATA
SIO CK
STB RC2
SIF DATA
SIF CLK
SIF STRB
SWP
VTHREF
PBA1SA4S SWP
PBB1SB4S SWP
PBA3SA6S SWP
PBB3SB6S SWP
ION VTH REF
SAT A2 OUT OLD
SAT A2 OUT NEW
SAT A6 OUT NEW
IC1802 ION3
VITERBI DEC
LMS
INNER ECC DEC
DATA
CLK MO
CLK MI
ION3 DATA 18-0
ION3 CK
ION3 CLK MI
5/7 FPGA-P
7/7 IC2404
MON18
MON16
TP2013
TP2012
ERRC
ERRD
ERRA
ERRB
TP2010 PB11
TP2011 PB12
TP2008 PB9
TP2009 PB10
NOSIG
D2000 NOSIG3
GER0
GER1
ION3 GER0
ION2 GER0
ION1 GER0
ION3 GER1
ION2 GER1
ION1 GER1
3/7 ION2
2/7 ION1
IC2401
PLV1
GAIN ERR
7/7 CPU
PBDC5-0
PBZC5-0
CLK PBCI
PBDTCC
SWC
VREFC1, 2
PBDD5-0
PBZD5-0
CLK PBDI
PBDTCD
SWD
VREFD1, 2
PBDA5-0
PBZA5-0
CLK PBAI
PBDTCA
SWA
VREFA1, 2
PBDB5-0
PBZB5-0
CLK PBBI
PBDTCB
SWB
VREFB1, 2
7/7 CPU
STB RC2
PBA1SA4S SWP
PBB1SB4S SWP
PBA3SA6S SWP
PBB3SB6S SWP
1/7 FPGA-R
7/7 IC1003
RIPPLE FILTER
PBA1SA4S ENV
PBB1SB4S ENV
PBA3SA6S ENV
PBB3SB6S ENV
6/7 ENVELOPE SEL CKT
SAT A2 OUT OLD
SAT A2 OUT NEW
SAT A6 OUT NEW
SS:22-68
SS:22-70
2-75
2-76
SS DT JUMP
SS DT DIRECTION
IC2400
DT JUMP
DT DIRECTION
2/7 ION1
3/7 ION2
JUMP DIRECTION
DBUS7-0
STT-1, 0
CPU CK
ION STB
ION CS2
ION RESET
CPUAD
CPUSTAT1, 0
CLK CPU
XCPUSTRB
XCPUCS
RESET
7/7 IC2911
TDO
TDI
TCK
TMS
TRST
TDO ION3
TDO ION2
TCK ALL
TMS ALL
TRST ION
5/7 ENDEAVOR-P
3/7 ION2
7/7 IC405
7/7 IC404
2/7 IC2405

EQ-102 (4/7)

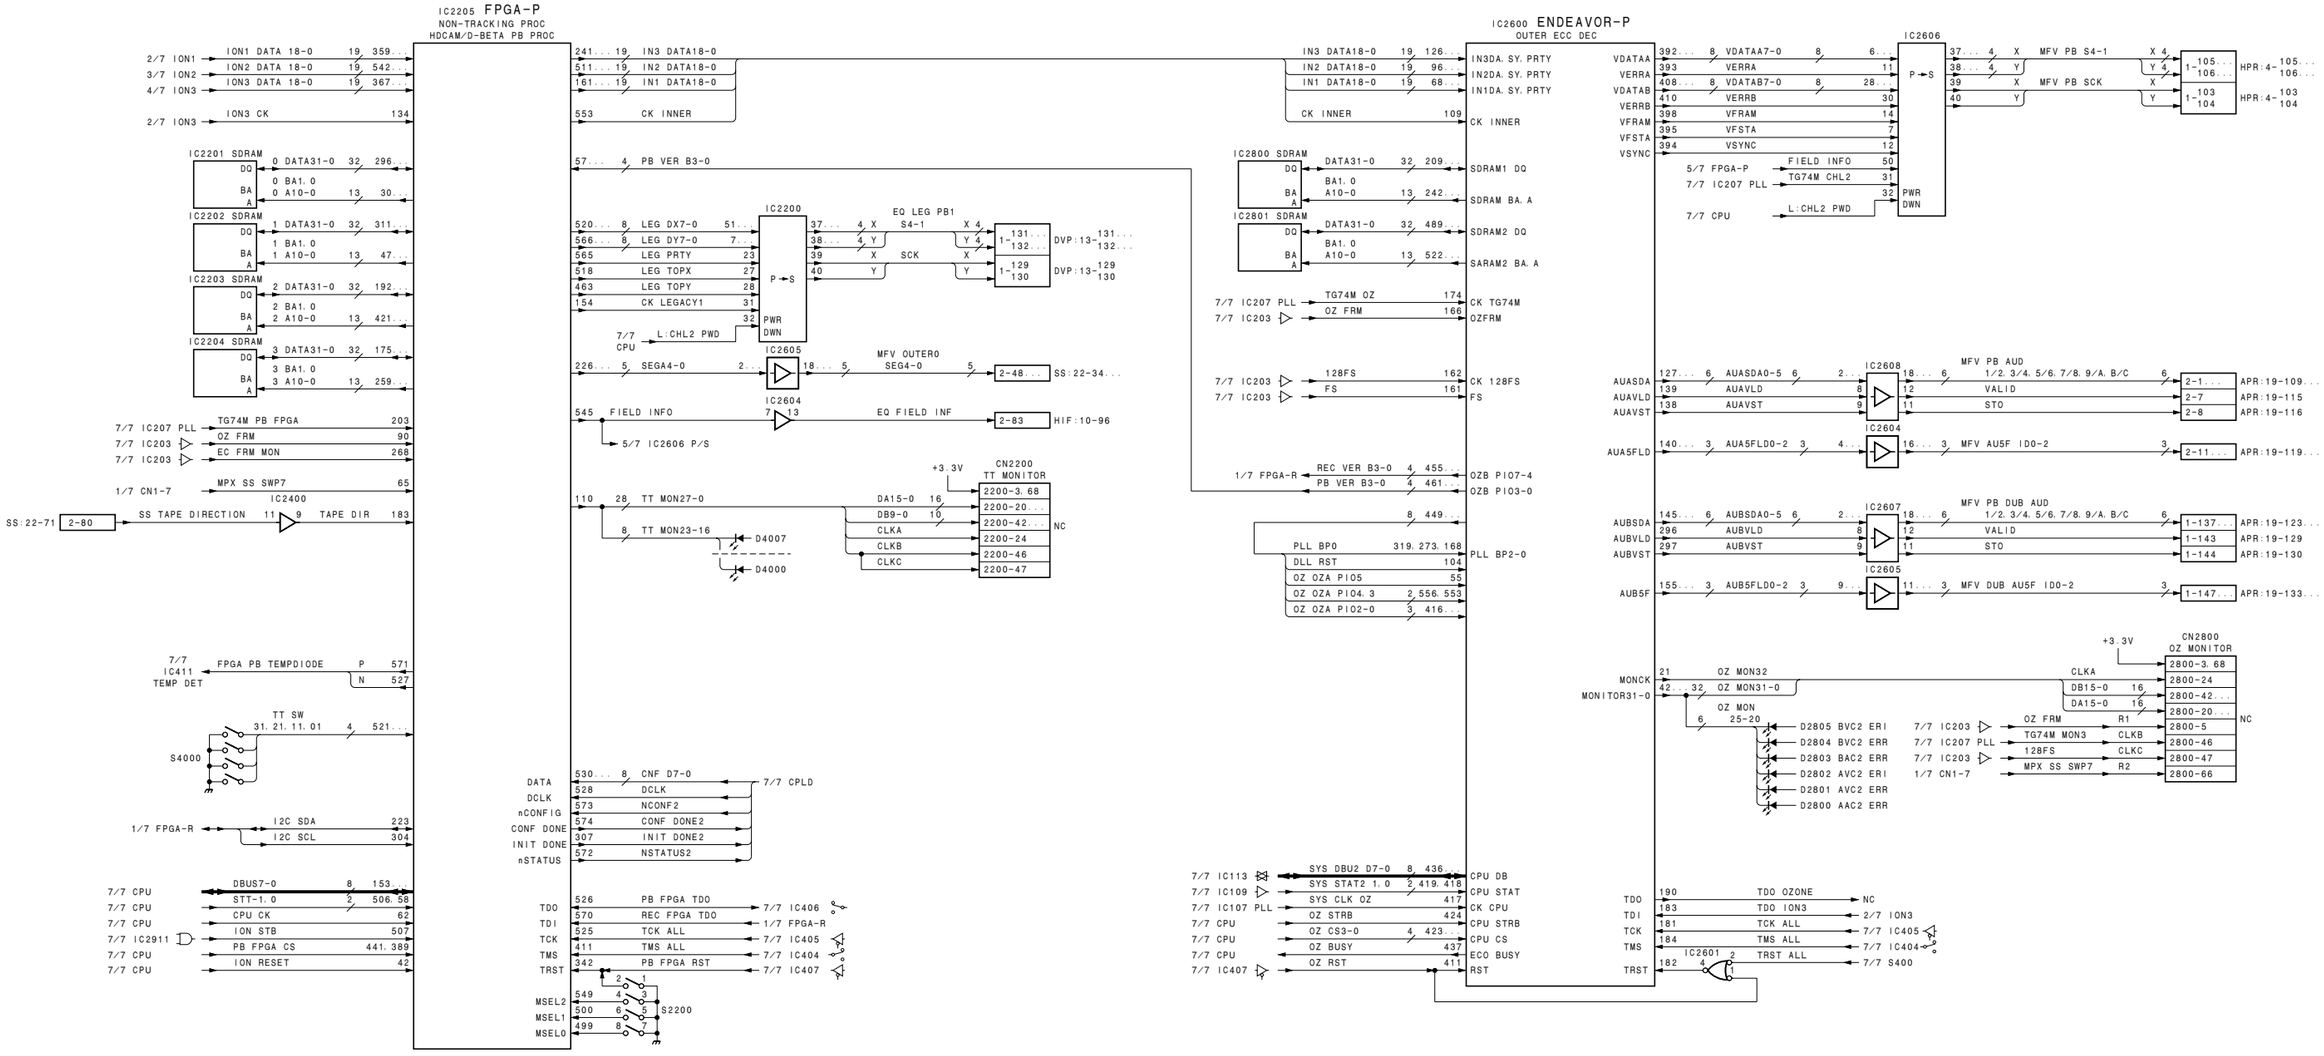
IC2205 FPGA-P
NON-TRACKING PROC
HDCAM/D-BETA PB PROC
IC2600 ENDEAVOR-P
OUTER ECC DEC
IC2200
IC2606
IC2608
IC2607
IC2604
IC2605
IC2800 SDRAM
IC2801 SDRAM
IC2201 SDRAM
IC2202 SDRAM
IC2203 SDRAM
IC2204 SDRAM
CN2200 TT MONITOR
CN2800 OZ MONITOR
TT SW
S4000
S2200
D4007
D4000
IC2601
IC411 TEMP DET
MFV PB AUD
MFV PB DUB AUD
EQ LEG PB1
MFV OUTER0
IN3 DATA18-0
IN2 DATA18-0
IN1 DATA18-0
CK INNER
PB VER B3-0
LEG DX7-0
LEG DY7-0
LEG PRTY
LEG TOPX
LEG TOPY
CK LEGACY1
SEGA4-0
FIELD INFO
EQ FIELD INF
TT MON27-0
TT MON23-16
TG74M PB FPGA
OZ FRM
EC FRM MON
MPX SS SWP7
SS TAPE DIRECTION
TAPE DIR
FPGA PB TEMPDIODE
I2C SDA
I2C SCL
DBUS7-0
STT-1.0
CPU CK
ION STB
PB FPGA CS
ION RESET
CNF D7-0
DCLK
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
PB FPGA TDO
REC FPGA TDO
TCK ALL
TMS ALL
PB FPGA RST
MSEL2
MSEL1
MSEL0
IN3DA. SY. PRTY
IN2DA. SY. PRTY
IN1DA. SY. PRTY
CK TG74M
OZFRM
CK 128FS
FS
REC VER B3-0
PB VER B3-0
OZB PIO7-4
OZB PIO3-0
PLL BP0
DLL RST
OZ OZA PIO5
OZ OZA PIO4.3
OZ OZA PIO2-0
PLL BP2-0
SDRAM1 DQ
SDRAM BA. A
SDRAM2 DQ
SARAM2 BA. A
VDATAA
VERRA
VDATAB
VERRB
VFRAM
VFSTA
VSYNC
MFV PB S4-1
MFV PB SCK
HPR:4-105...106...
HPR:4-103 104
AUASDA
AUAVLD
AUAVST
AUA5FLD
AUBSDA
AUBVLD
AUBVST
AUB5F
VALID
STO
MFV AU5F ID0-2
MFV DUB AU5F ID0-2
APR:19-109...
APR:19-115
APR:19-116
APR:19-119...
APR:19-123...
APR:19-129
APR:19-130
APR:19-133...
MONCK
MONITOR31-0
OZ MON32
OZ MON31-0
OZ MON
D2805 BVC2 ERI
D2804 BVC2 ERR
D2803 BAC2 ERR
D2802 AVC2 ERI
D2801 AVC2 ERR
D2800 AAC2 ERR
OZ FRM
TG74M MON3
128FS
MPX SS SWP7
SYS DBU2 D7-0
SYS STAT2 1.0
SYS CLK OZ
OZ STRB
OZ CS3-0
OZ BUSY
OZ RST
CPU DB
CPU STAT
CK CPU
CPU STRB
CPU CS
ECO BUSY
RST
TDO OZONE
TDO ION3
TCK ALL
TMS ALL
TRST ALL
7/7 CPLD
1/7 FPGA-R
7/7 IC406
7/7 IC405
7/7 IC404
7/7 IC407
7/7 S400
2/7 ION1
3/7 ION2
4/7 ION3
2/7 ION3
7/7 IC207 PLL
7/7 IC203
1/7 CN1-7
SS:22-71
7/7 IC2911
7/7 CPU
7/7 IC113
7/7 IC109
7/7 IC107 PLL
NC
+3.3V

EQ-102 (5/7)

EQ-102 (6/7)

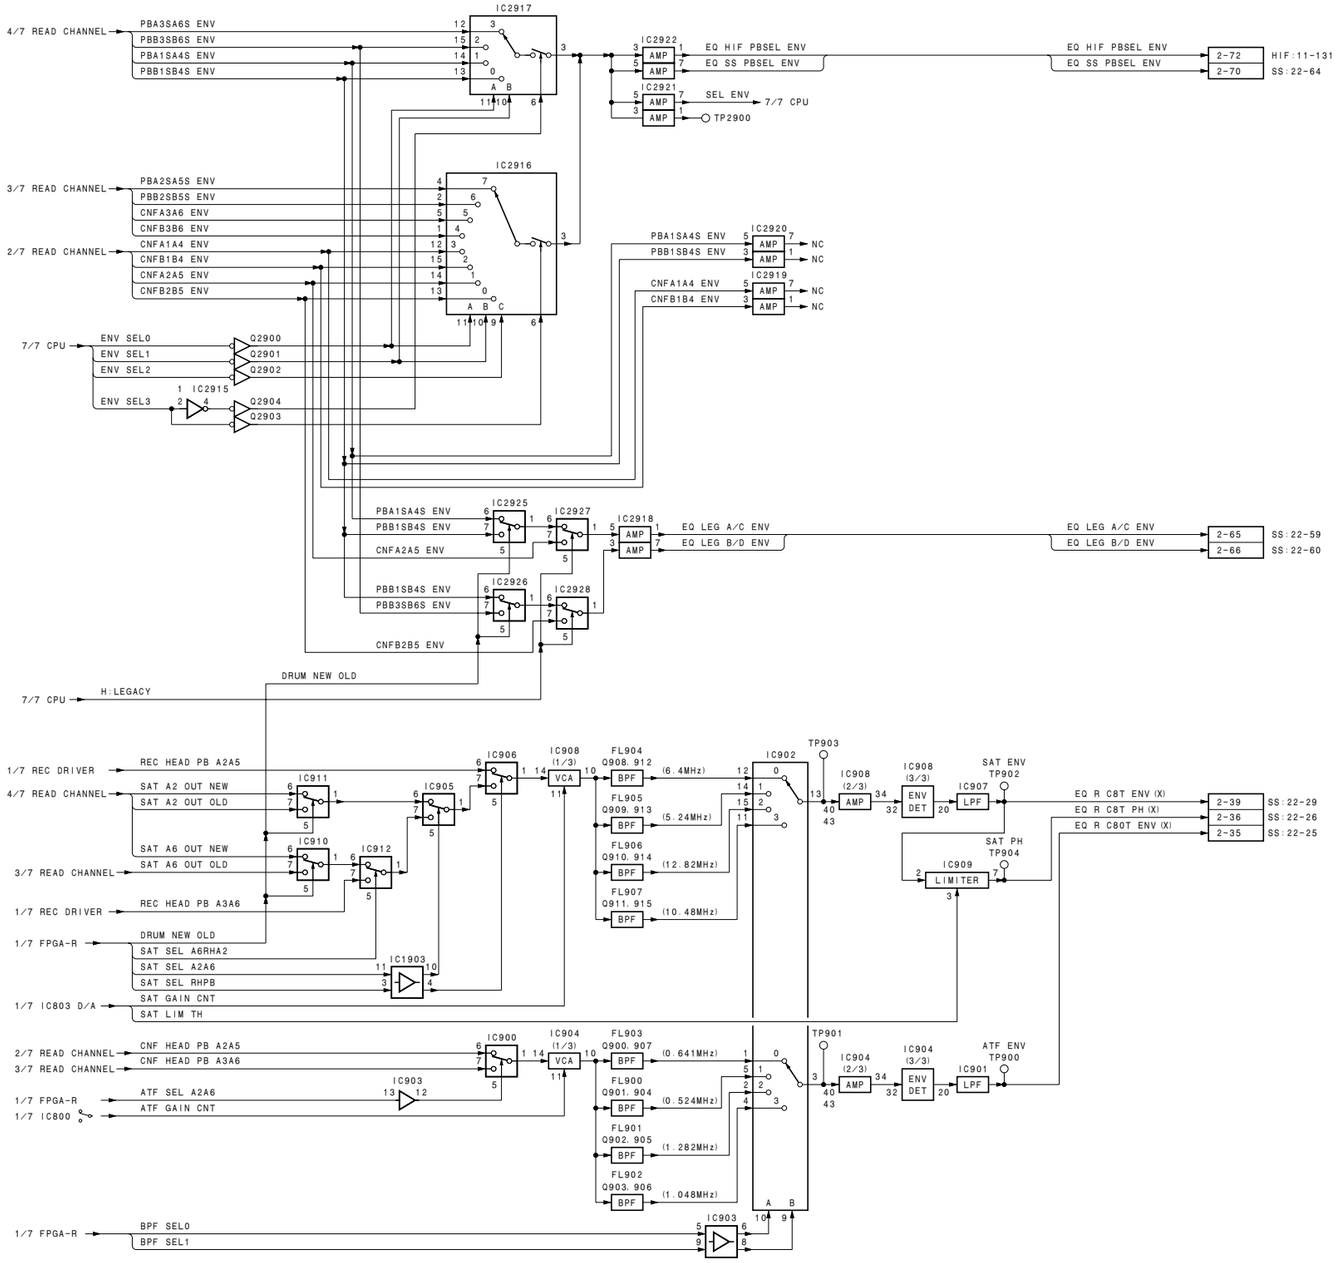

EQ-102 (6/7)

3-40

EQ-102 (7/7)

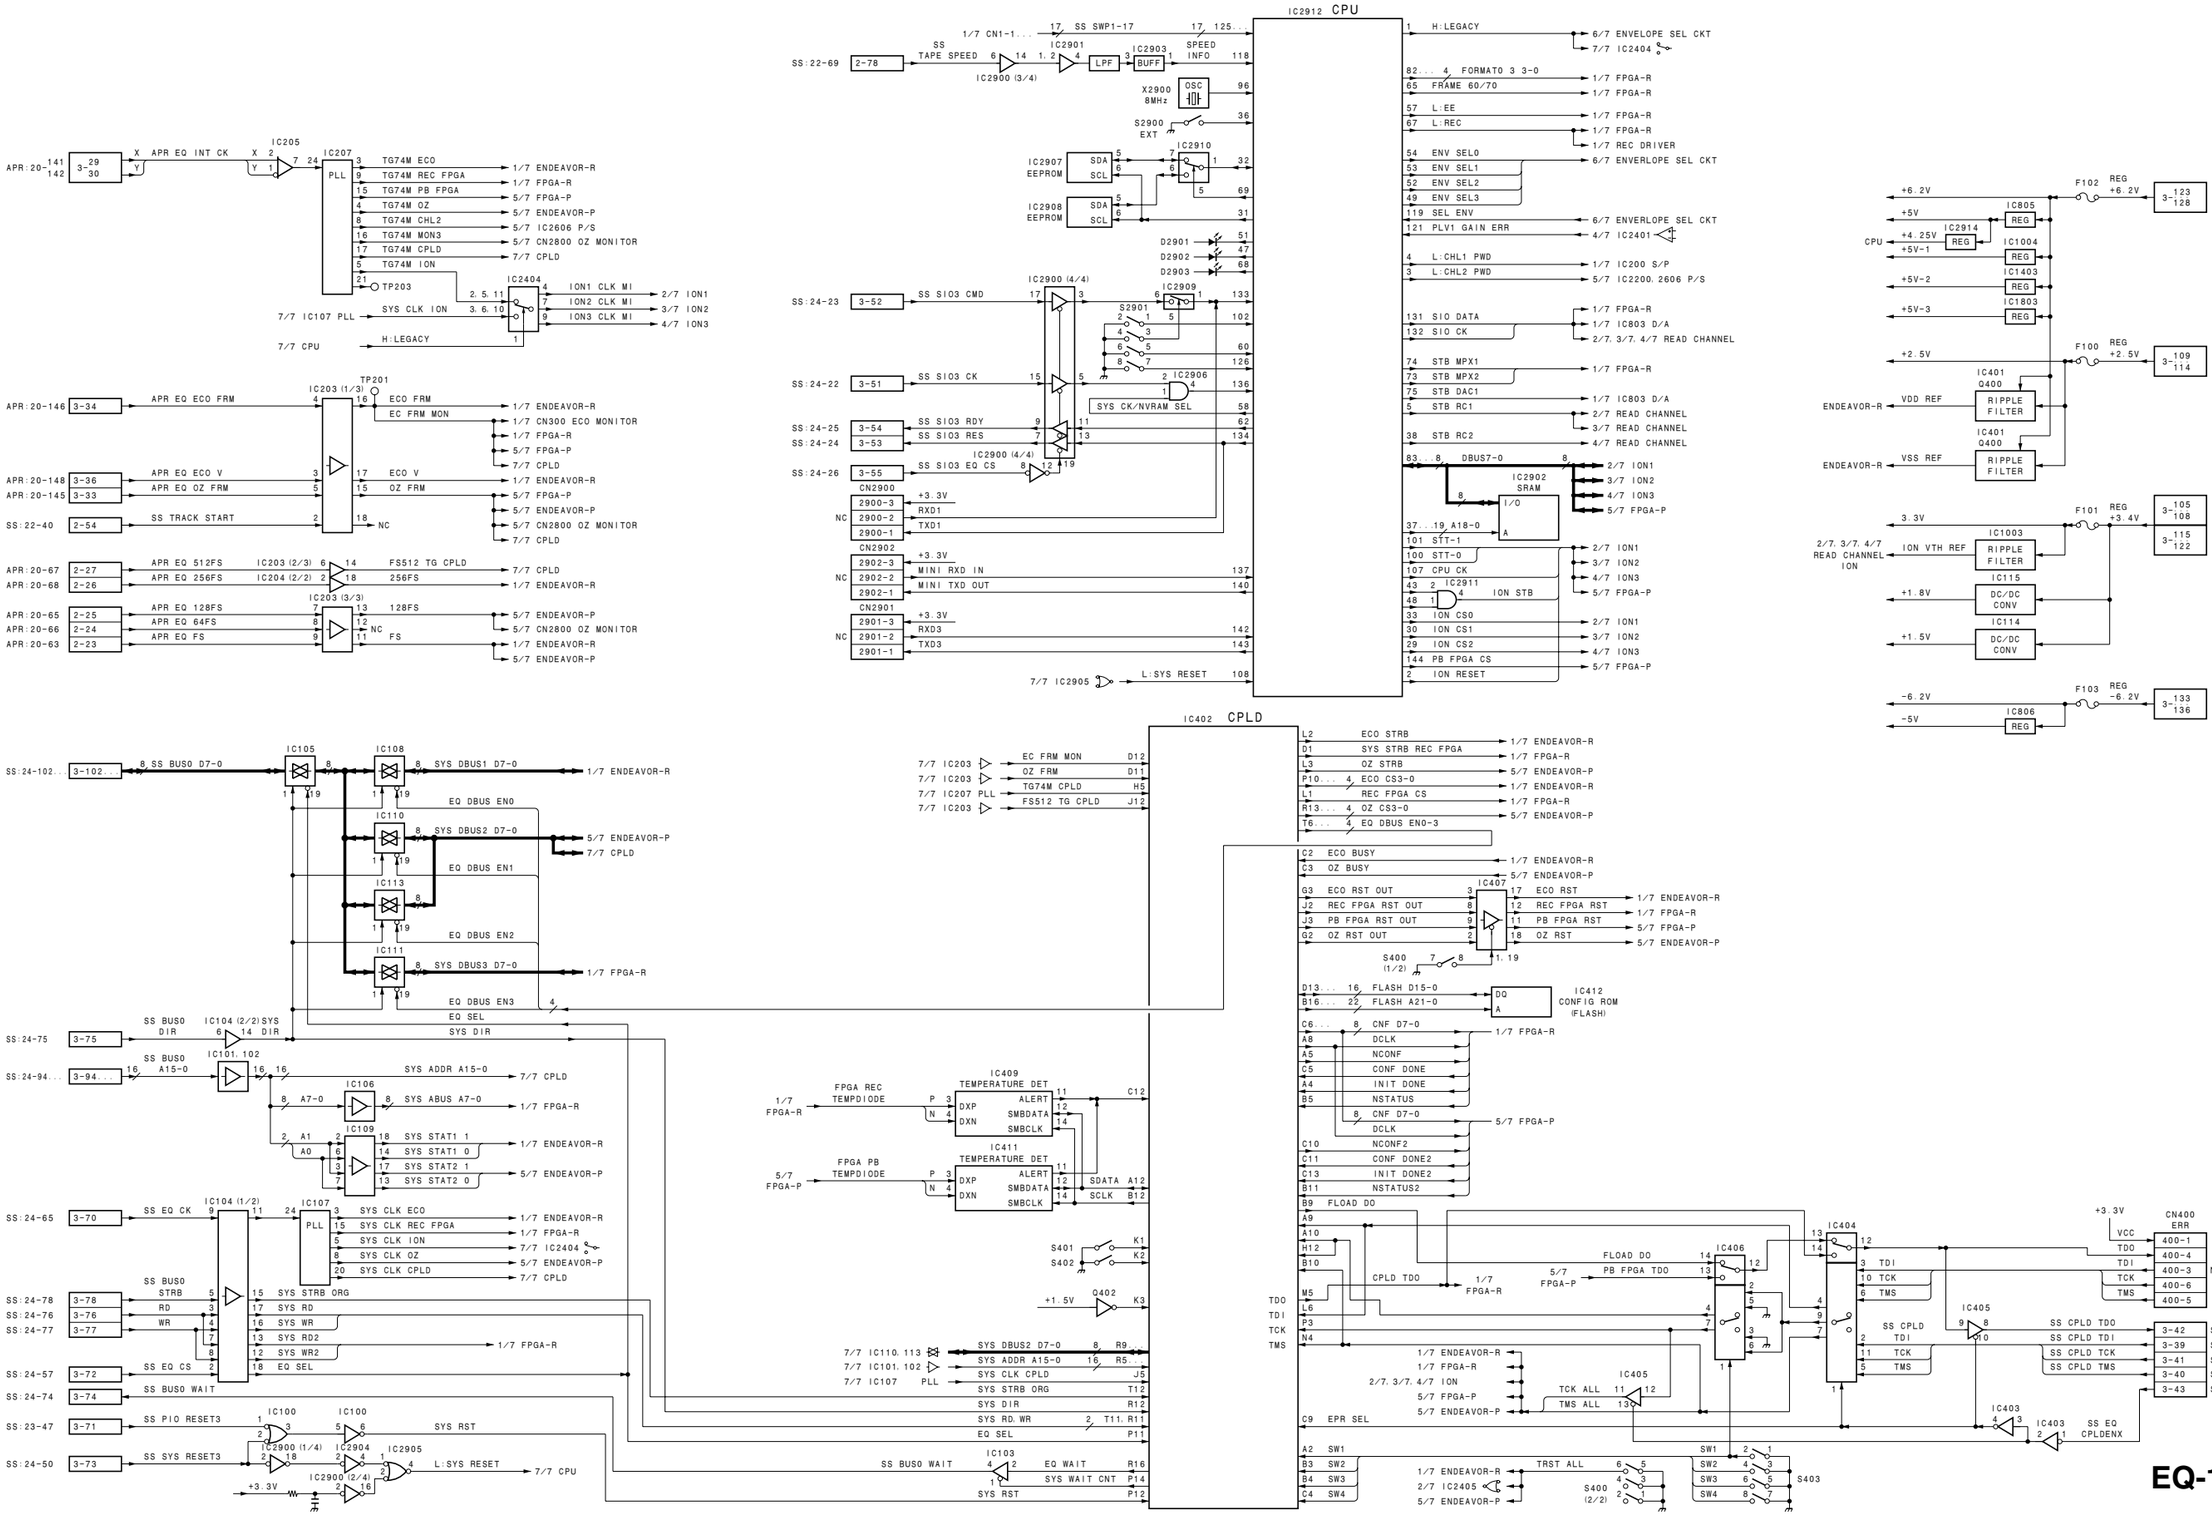
IC2912 CPU
IC402 CPLD
IC205
IC207
PLL
APR EQ INT CK
TG74M ECO
TG74M REC FPGA
TG74M PB FPGA
TG74M OZ
TG74M CHL2
TG74M MON3
TG74M CPLD
TG74M ION
TP203
ION1 CLK MI
ION2 CLK MI
ION3 CLK MI
SYS CLK ION
H:LEGACY
TP201
IC203 (1/3)
APR EQ ECO FRM
ECO FRM
EC FRM MON
APR EQ ECO V
APR EQ OZ FRM
ECO V
OZ FRM
SS TRACK START
NC
IC203 (2/3)
IC204 (2/2)
APR EQ 512FS
APR EQ 256FS
FS512 TG CPLD
256FS
IC203 (3/3)
APR EQ 128FS
APR EQ 64FS
APR EQ FS
128FS
NC
FS
IC105
IC108
IC110
IC113
IC111
SS BUS0 D7-0
SYS DBUS1 D7-0
SYS DBUS2 D7-0
SYS DBUS3 D7-0
EQ DBUS EN0
EQ DBUS EN1
EQ DBUS EN2
EQ DBUS EN3
EQ SEL
SYS DIR
IC104 (2/2)
IC101, 102
SYS ADDR A15-0
IC106
SYS ABUS A7-0
IC109
SYS STAT1 1
SYS STAT1 0
SYS STAT2 1
SYS STAT2 0
IC104 (1/2)
IC107
SYS CLK ECO
SYS CLK REC FPGA
SYS CLK ION
SYS CLK OZ
SYS CLK CPLD
SS BUS0 STRB
SYS STRB ORG
SYS RD
SYS WR
SYS RD2
SYS WR2
EQ SEL
SS BUS0 WAIT
IC100
IC2900 (1/4)
IC2904
IC2905
IC2900 (2/4)
SYS RST
L:SYS RESET
+3.3V
IC2901
IC2903
IC2900 (3/4)
LPF
BUFF
SS TAPE SPEED
SPEED INFO
X2900 8MHz
OSC
S2900 EXT
IC2907 EEPROM
IC2908 EEPROM
IC2910
SDA
SCL
D2901
D2902
D2903
IC2900 (4/4)
IC2909
S2901
SS SIO3 CMD
SS SIO3 CK
SS SIO3 RDY
SS SIO3 RES
SS SIO3 EQ CS
IC2906
SYS CK/NVRAM SEL
CN2900
CN2902
CN2901
MINI RXD IN
MINI TXD OUT
RXD1
TXD1
RXD3
TXD3
L:SYS RESET
IC409 TEMPERATURE DET
IC411 TEMPERATURE DET
FPGA REC TEMPDIODE
FPGA PB TEMPDIODE
DXP
DXN
ALERT
SMBDATA
SMBCLK
SDATA A12
SCLK B12
S401
S402
K1
K2
Q402
K3
SYS DBUS2 D7-0
SYS ADDR A15-0
SYS CLK CPLD
SYS STRB ORG
SYS DIR
SYS RD, WR
EQ SEL
SS BUS0 WAIT
EQ WAIT
SYS WAIT CNT
SYS RST
H:LEGACY
FORMAT0 3 3-0
FRAME 60/70
L:EE
L:REC
REC DRIVER
ENV SEL0
ENV SEL1
ENV SEL2
ENV SEL3
SEL ENV
PLV1 GAIN ERR
L:CHL1 PWD
L:CHL2 PWD
SIO DATA
SIO CK
STB MPX1
STB MPX2
STB DAC1
STB RC1
STB RC2
DBUS7-0
IC2902 SRAM
A18-0
STT-1
STT-0
CPU CK
ION STB
ION CS0
ION CS1
ION CS2
PB FPGA CS
ION RESET
ECO STRB
SYS STRB REC FPGA
OZ STRB
ECO CS3-0
REC FPGA CS
OZ CS3-0
EQ DBUS EN0-3
ECO BUSY
OZ BUSY
ECO RST OUT
REC FPGA RST OUT
PB FPGA RST OUT
OZ RST OUT
ECO RST
REC FPGA RST
PB FPGA RST
OZ RST
IC407
S400 (1/2)
FLASH D15-0
FLASH A21-0
IC412 CONFIG ROM (FLASH)
CNF D7-0
DCLK
NCONF
CONF DONE
INIT DONE
NSTATUS
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
FLOAD DO
CPLD TDO
PB FPGA TDO
IC406
IC404
IC405
IC403
IC403 SS EQ CPLDENX
SS CPLD TDO
SS CPLD TDI
SS CPLD TCK
SS CPLD TMS
TDO
TDI
TCK
TMS
TCK ALL
TMS ALL
TRST ALL
EPR SEL
SW1
SW2
SW3
SW4
S403
S400 (2/2)
+3.3V
CN400 ERR
VCC
TDO
TDI
TCK
TMS
NC
F102
F100
F101
F103
REG
+6.2V
+5V
+4.25V
+5V-1
+5V-2
+5V-3
+2.5V
+3.4V
-6.2V
-5V
IC2914
IC805
IC1004
IC1403
IC1803
IC401
IC1003
IC115
IC114
IC806
VDD REF
VSS REF
RIPPLE FILTER
ION VTH REF
DC/DC CONV
CPU
ENDEAVOR-R
READ CHANNEL ION

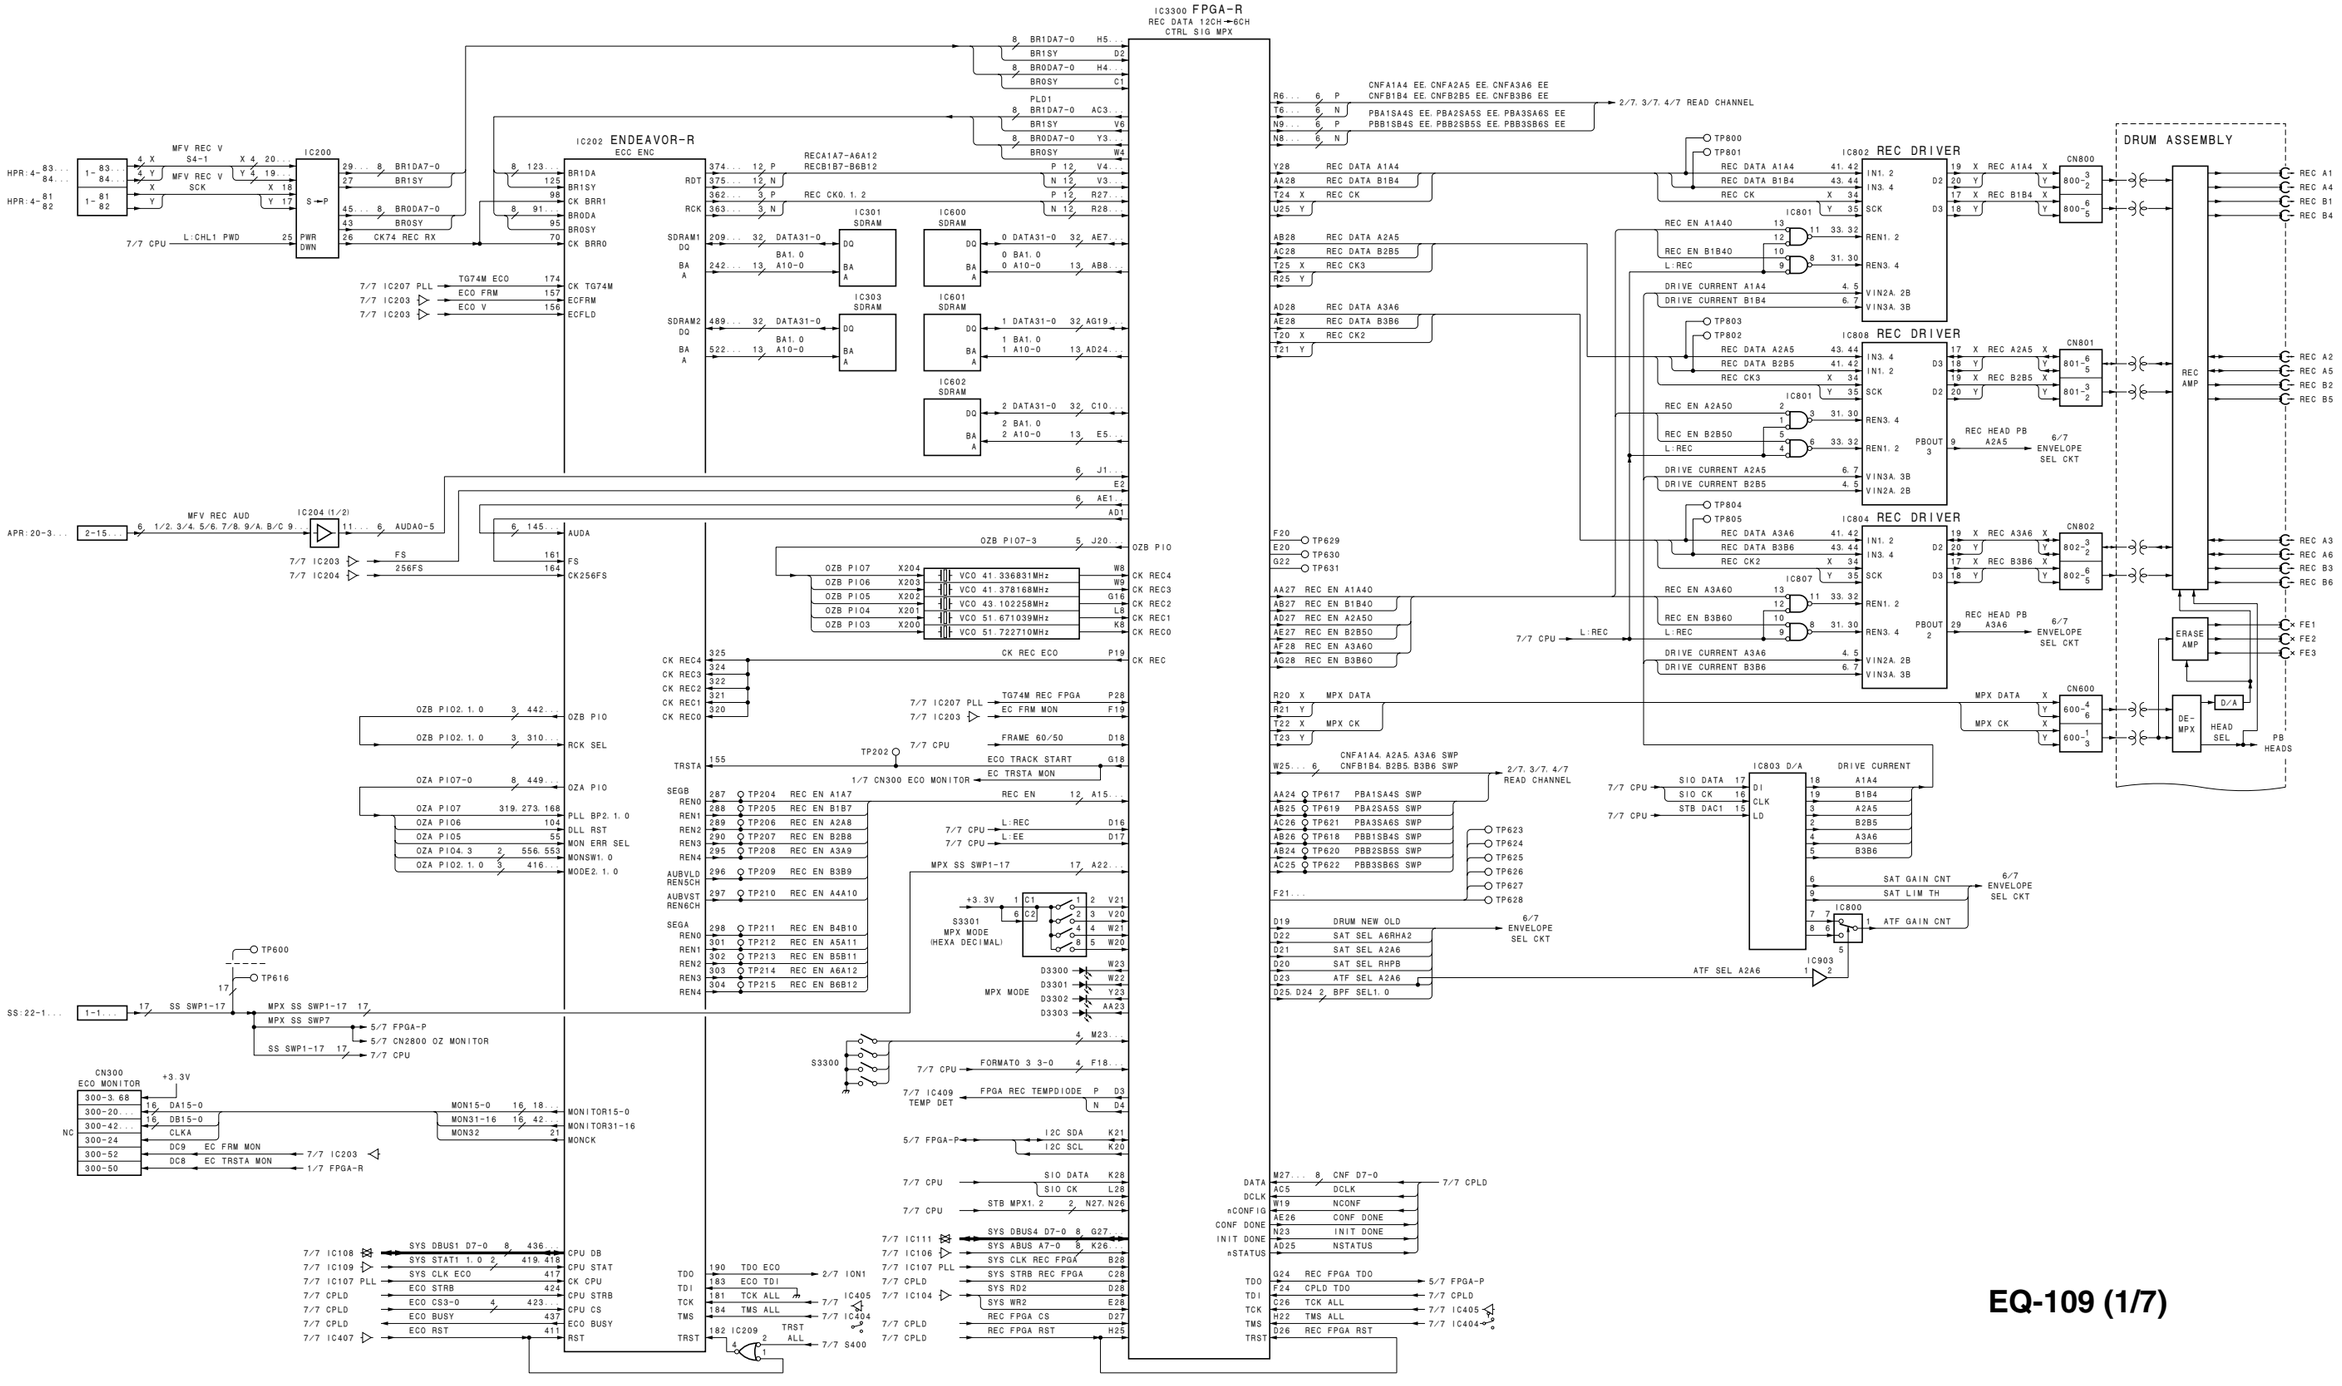
IC3300 FPGA-R
REC DATA 12CH→6CH
CTRL SIG MPX
IC202 ENDEAVOR-R
ECC ENC
IC200
MFV REC V
MFV REC V SCK
IC204 (1/2)
MFV REC AUD
IC301 SDRAM
IC303 SDRAM
IC600 SDRAM
IC601 SDRAM
IC602 SDRAM
PLD1
IC802 REC DRIVER
IC808 REC DRIVER
IC804 REC DRIVER
IC807
IC801
DRUM ASSEMBLY
REC AMP
ERASE AMP
DE-MPX
HEAD SEL
D/A
IC803 D/A
DRIVE CURRENT
IC800
IC903
S3300
MPX MODE
(HEXA DECIMAL)
CN300
ECO MONITOR
CN800
CN801
CN802
CN600
REC A1
REC A4
REC B1
REC B4
REC A2
REC A5
REC B2
REC B5
REC A3
REC A6
REC B3
REC B6
FE1
FE2
FE3
PB HEADS
REC HEAD PB A2A5
REC HEAD PB A3A6
6/7 ENVELOPE SEL CKT
2/7, 3/7, 4/7 READ CHANNEL
7/7 CPLD
5/7 FPGA-P
1/7 FPGA-R
7/7 CPU
7/7 IC203
7/7 IC204
7/7 IC207 PLL
7/7 IC108
7/7 IC109
7/7 IC107 PLL
7/7 CPLD
7/7 IC407
7/7 IC111
7/7 IC106
7/7 IC104
7/7 IC405
7/7 IC404
7/7 S400
1/7 CN300 ECO MONITOR
5/7 CN2800 OZ MONITOR
ION1
S400

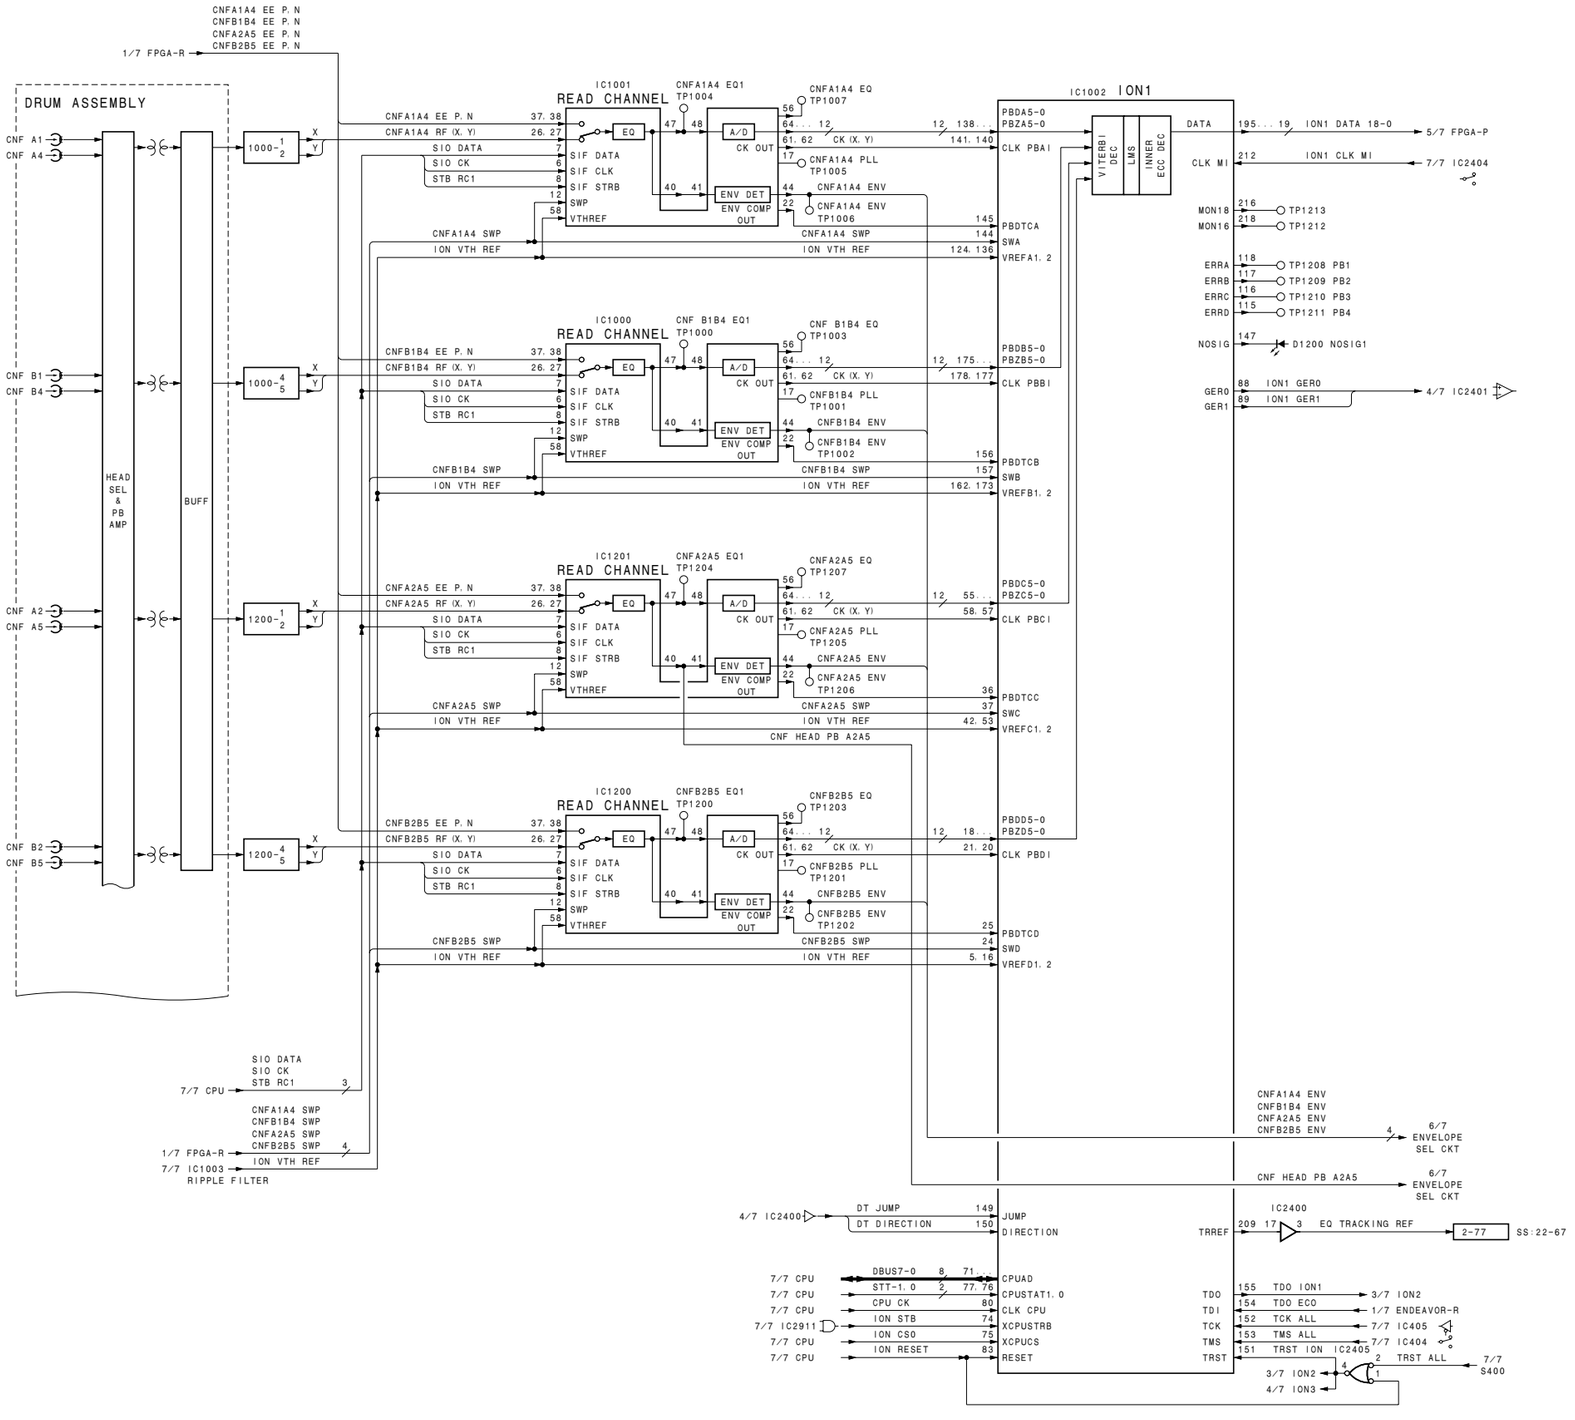
CNFA1A4 EE P. N
CNFB1B4 EE P. N
CNFA2A5 EE P. N
CNFB2B5 EE P. N
1/7 FPGA-R
DRUM ASSEMBLY
CNF A1
CNF A4
CNF B1
CNF B4
CNF A2
CNF A5
CNF B2
CNF B5
HEAD SEL & PB AMP
BUFF
1000-1/2
1000-4/5
1200-1/2
1200-4/5
IC1001 READ CHANNEL
CNFA1A4 EQ1 TP1004
CNFA1A4 EQ TP1007
CNFA1A4 EE P. N
CNFA1A4 RF (X. Y)
SIO DATA
SIO CK
STB RC1
SIF DATA
SIF CLK
SIF STRB
SWP
VTHREF
EQ
A/D
CK OUT
ENV DET
ENV COMP OUT
CK (X. Y)
CNFA1A4 PLL TP1005
CNFA1A4 ENV
CNFA1A4 ENV TP1006
CNFA1A4 SWP
ION VTH REF
PBDA5-0
PBZA5-0
CLK PBAI
PBDTCA
SWA
VREFA1, 2
IC1000 READ CHANNEL
CNF B1B4 EQ1 TP1000
CNF B1B4 EQ TP1003
CNFB1B4 EE P. N
CNFB1B4 RF (X. Y)
CNFB1B4 PLL TP1001
CNFB1B4 ENV
CNFB1B4 ENV TP1002
CNFB1B4 SWP
PBDB5-0
PBZB5-0
CLK PBBI
PBDTCB
SWB
VREFB1, 2
IC1201 READ CHANNEL
CNFA2A5 EQ1 TP1204
CNFA2A5 EQ TP1207
CNFA2A5 EE P. N
CNFA2A5 RF (X. Y)
CNFA2A5 PLL TP1205
CNFA2A5 ENV
CNFA2A5 ENV TP1206
CNFA2A5 SWP
PBDC5-0
PBZC5-0
CLK PBCI
PBDTCC
SWC
VREFC1, 2
CNF HEAD PB A2A5
IC1200 READ CHANNEL
CNFB2B5 EQ1 TP1200
CNFB2B5 EQ TP1203
CNFB2B5 EE P. N
CNFB2B5 RF (X. Y)
CNFB2B5 PLL TP1201
CNFB2B5 ENV
CNFB2B5 ENV TP1202
CNFB2B5 SWP
PBDD5-0
PBZD5-0
CLK PBDI
PBDTCD
SWD
VREFD1, 2
IC1002 ION1
VITERBI DEC
LMS
INNER ECC DEC
DATA
ION1 DATA 18-0
5/7 FPGA-P
CLK MI
ION1 CLK MI
7/7 IC2404
MON18
MON16
TP1213
TP1212
ERRA
ERRB
ERRC
ERRD
TP1208 PB1
TP1209 PB2
TP1210 PB3
TP1211 PB4
NOSIG
D1200 NOSIG1
GER0
GER1
ION1 GER0
ION1 GER1
4/7 IC2401
SIO DATA
SIO CK
STB RC1
7/7 CPU
CNFA1A4 SWP
CNFB1B4 SWP
CNFA2A5 SWP
CNFB2B5 SWP
1/7 FPGA-R
ION VTH REF
7/7 IC1003 RIPPLE FILTER
CNFA1A4 ENV
CNFB1B4 ENV
CNFA2A5 ENV
CNFB2B5 ENV
6/7 ENVELOPE SEL CKT
CNF HEAD PB A2A5
6/7 ENVELOPE SEL CKT
4/7 IC2400
DT JUMP
DT DIRECTION
JUMP
DIRECTION
IC2400
TRREF
EQ TRACKING REF
2-77
SS:22-67
DBUS7-0
STT-1. 0
CPU CK
ION STB
ION CS0
ION RESET
CPUAD
CPUSTAT1. 0
CLK CPU
XCPUSTRB
XCPUCS
RESET
7/7 IC2911
TDO
TDI
TCK
TMS
TRST
TDO ION1
TDO ECO
TCK ALL
TMS ALL
TRST ION
3/7 ION2
TRST ALL
7/7 S400
4/7 ION3
IC2405

EQ-109 (3/7)

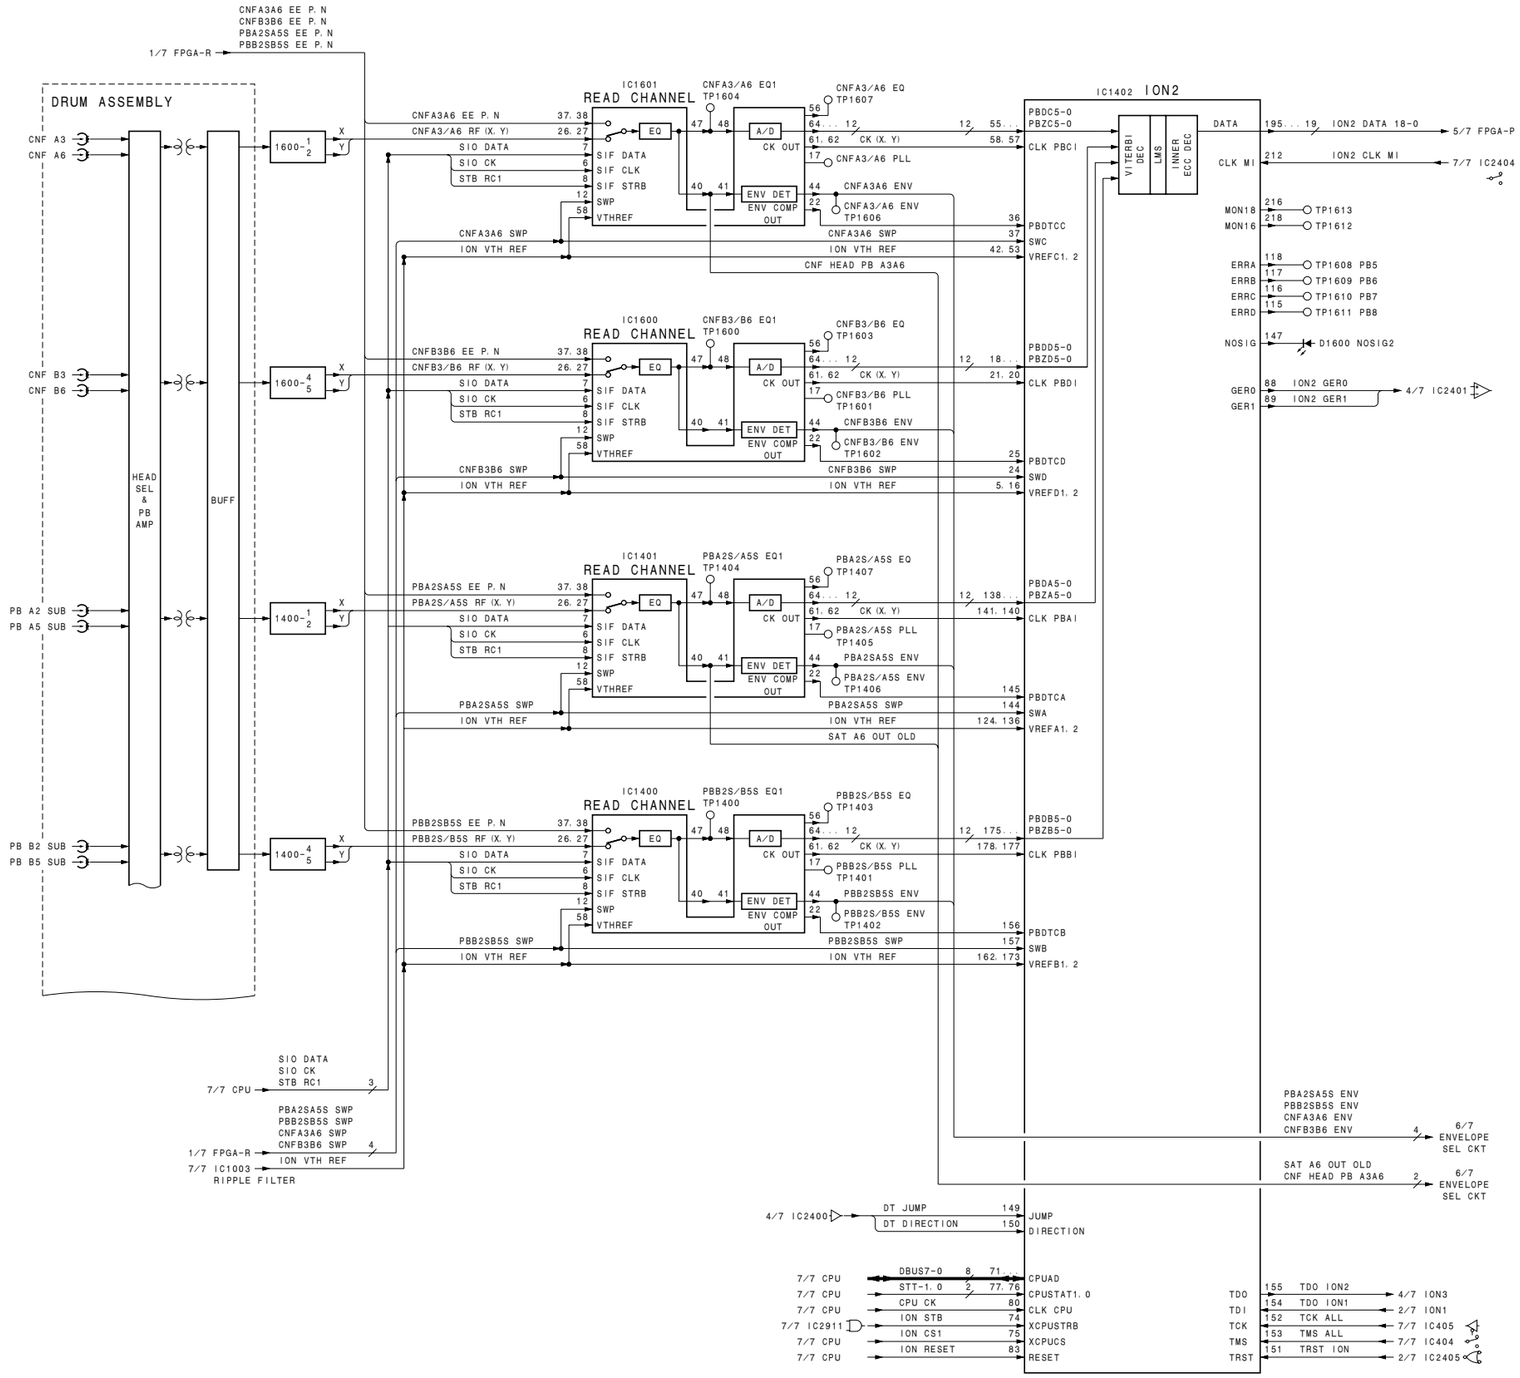

EQ-109 (3/7)

3-44

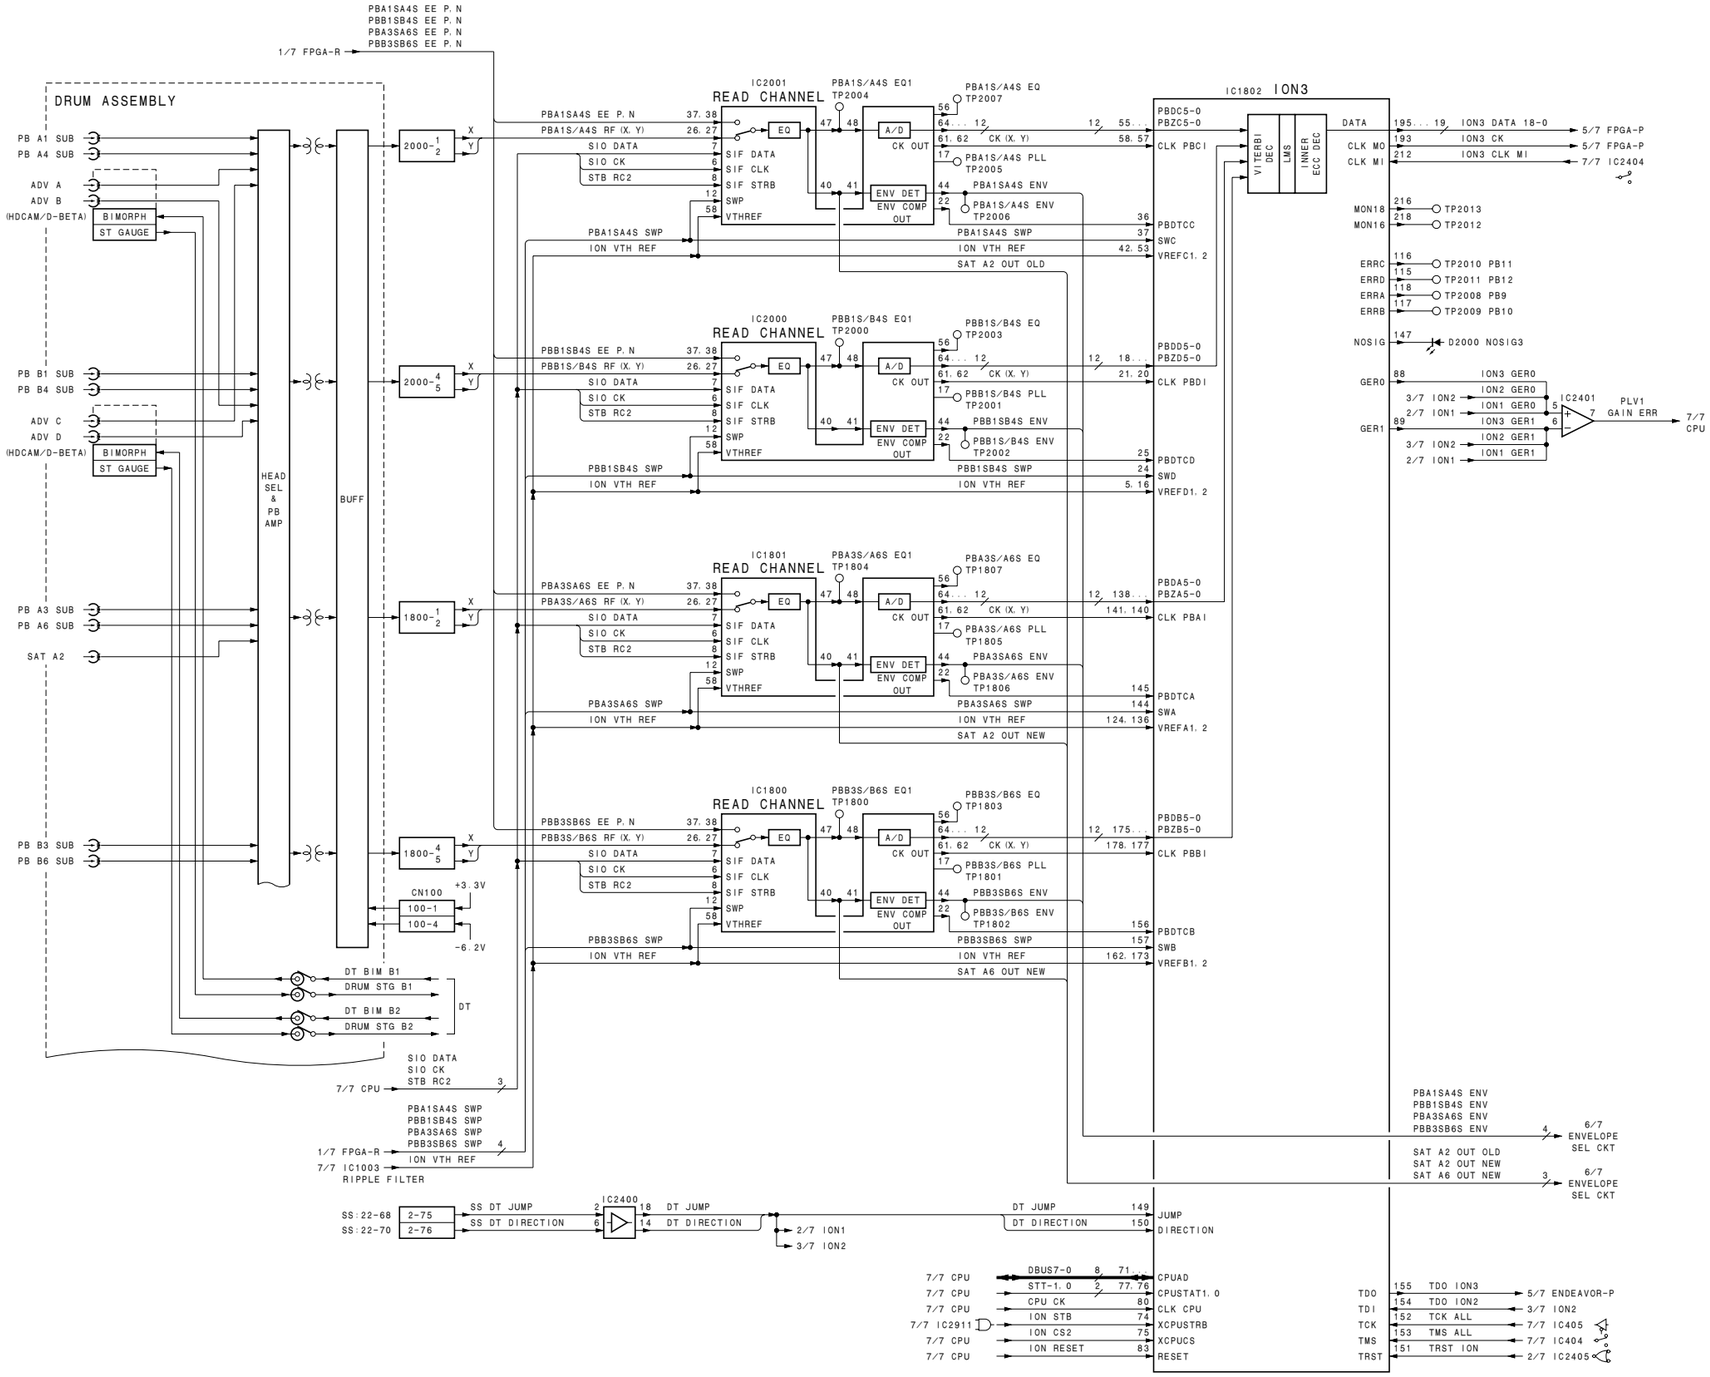
PBA1SA4S EE P. N
PBB1SB4S EE P. N
PBA3SA6S EE P. N
PBB3SB6S EE P. N
1/7 FPGA-R
DRUM ASSEMBLY
PB A1 SUB
PB A4 SUB
ADV A
ADV B
(HDCAM/D-BETA)
BIMORPH
ST GAUGE
PB B1 SUB
PB B4 SUB
ADV C
ADV D
PB A3 SUB
PB A6 SUB
SAT A2
PB B3 SUB
PB B6 SUB
HEAD SEL & PB AMP
BUFF
2000-1/2
2000-4/5
1800-1/2
1800-4/5
CN100
100-1
100-4
+3.3V
-6.2V
DT BIM B1
DRUM STG B1
DT BIM B2
DRUM STG B2
DT
IC2001
READ CHANNEL
PBA1S/A4S EQ1
TP2004
PBA1S/A4S EQ
TP2007
PBA1SA4S EE P. N
PBA1S/A4S RF (X. Y)
SIO DATA
SIO CK
STB RC2
EQ
A/D
CK OUT
CK (X. Y)
PBA1S/A4S PLL
TP2005
ENV DET
ENV COMP OUT
PBA1SA4S ENV
PBA1S/A4S ENV
TP2006
SIF DATA
SIF CLK
SIF STRB
SWP
VTHREF
PBA1SA4S SWP
ION VTH REF
SAT A2 OUT OLD
PBDC5-0
PBZC5-0
CLK PBCI
PBDTCC
SWC
VREFC1. 2
IC2000
PBB1S/B4S EQ1
TP2000
PBB1S/B4S EQ
TP2003
PBB1SB4S EE P. N
PBB1S/B4S RF (X. Y)
PBB1S/B4S PLL
TP2001
PBB1SB4S ENV
PBB1S/B4S ENV
TP2002
PBB1SB4S SWP
SAT A2 OUT NEW
PBDD5-0
PBZD5-0
CLK PBDI
PBDTCD
SWD
VREFD1. 2
IC1801
PBA3S/A6S EQ1
TP1804
PBA3S/A6S EQ
TP1807
PBA3SA6S EE P. N
PBA3S/A6S RF (X. Y)
PBA3S/A6S PLL
TP1805
PBA3SA6S ENV
PBA3S/A6S ENV
TP1806
PBA3SA6S SWP
SAT A6 OUT NEW
PBDA5-0
PBZA5-0
CLK PBAI
PBDTCA
SWA
VREFA1. 2
IC1800
PBB3S/B6S EQ1
TP1800
PBB3S/B6S EQ
TP1803
PBB3SB6S EE P. N
PBB3S/B6S RF (X. Y)
PBB3S/B6S PLL
TP1801
PBB3SB6S ENV
PBB3S/B6S ENV
TP1802
PBB3SB6S SWP
PBDB5-0
PBZB5-0
CLK PBBI
PBDTCB
SWB
VREFB1. 2
IC1802 ION3
VITERBI DEC
LMS
INNER ECC DEC
DATA
CLK MO
CLK MI
ION3 DATA 18-0
ION3 CK
ION3 CLK MI
5/7 FPGA-P
7/7 IC2404
MON18
MON16
TP2013
TP2012
ERRC
ERRD
ERRA
ERRB
TP2010 PB11
TP2011 PB12
TP2008 PB9
TP2009 PB10
NOSIG
D2000 NOSIG3
GER0
GER1
ION3 GER0
ION2 GER0
ION1 GER0
ION3 GER1
ION2 GER1
ION1 GER1
3/7 ION2
2/7 ION1
IC2401
PLV1
GAIN ERR
7/7 CPU
SIO DATA
SIO CK
STB RC2
PBA1SA4S SWP
PBB1SB4S SWP
PBA3SA6S SWP
PBB3SB6S SWP
ION VTH REF
1/7 FPGA-R
7/7 IC1003
RIPPLE FILTER
PBA1SA4S ENV
PBB1SB4S ENV
PBA3SA6S ENV
PBB3SB6S ENV
6/7 ENVELOPE SEL CKT
SAT A2 OUT OLD
SAT A2 OUT NEW
SAT A6 OUT NEW
IC2400
SS:22-68
SS:22-70
2-75
2-76
SS DT JUMP
SS DT DIRECTION
DT JUMP
DT DIRECTION
2/7 ION1
3/7 ION2
JUMP DIRECTION
7/7 CPU
7/7 IC2911
DBUS7-0
STT-1. 0
CPU CK
ION STB
ION CS2
ION RESET
CPUAD
CPUSTAT1. 0
CLK CPU
XCPUSTRB
XCPUCS
RESET
TDO
TDI
TCK
TMS
TRST
TDO ION3
TDO ION2
TCK ALL
TMS ALL
TRST ION
5/7 ENDEAVOR-P
3/7 ION2
7/7 IC405
7/7 IC404
2/7 IC2405

EQ-109 (4/7)

EQ-109 (5/7)

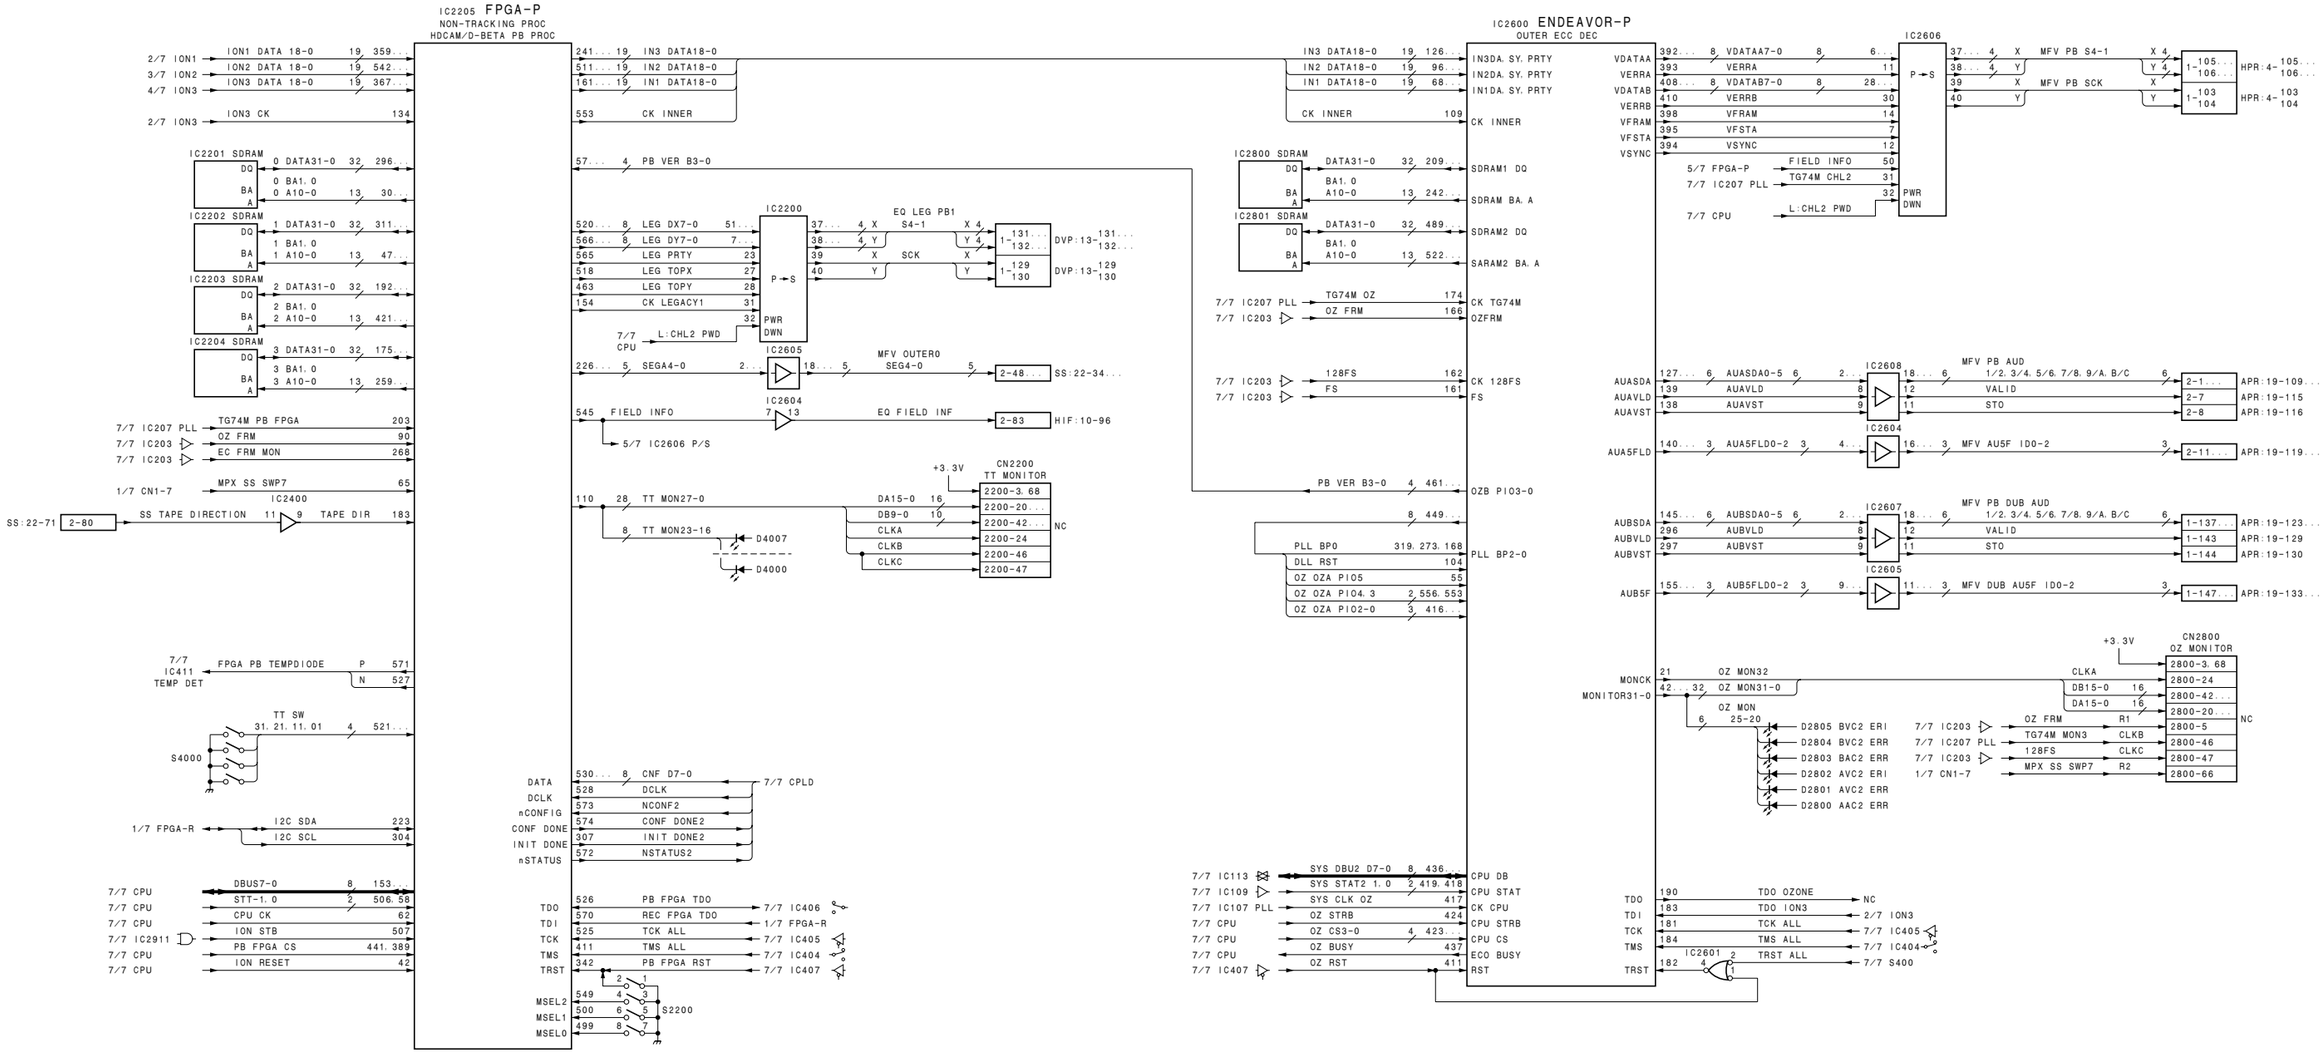
IC2205 FPGA-P
NON-TRACKING PROC
HDCAM/D-BETA PB PROC
IC2600 ENDEAVOR-P
OUTER ECC DEC
IC2606
IC2608
IC2604
IC2607
IC2605
IC2200
IC2400
IC2601
IC2201 SDRAM
IC2202 SDRAM
IC2203 SDRAM
IC2204 SDRAM
IC2800 SDRAM
IC2801 SDRAM
CN2200
TT MONITOR
CN2800
OZ MONITOR
ION1 DATA 18-0
ION2 DATA 18-0
ION3 DATA 18-0
ION3 CK
IN3 DATA18-0
IN2 DATA18-0
IN1 DATA18-0
CK INNER
PB VER B3-0
LEG DX7-0
LEG DY7-0
LEG PRTY
LEG TOPX
LEG TOPY
CK LEGACY1
EQ LEG PB1
S4-1
SCK
P→S
PWR DWN
L:CHL2 PWD
SEGA4-0
MFV OUTER0
SEG4-0
FIELD INFO
EQ FIELD INF
5/7 IC2606 P/S
TT MON27-0
TT MON23-16
D4007
D4000
DA15-0
DB9-0
CLKA
CLKB
CLKC
TG74M PB FPGA
OZ FRM
EC FRM MON
MPX SS SWP7
SS TAPE DIRECTION
TAPE DIR
FPGA PB TEMPDIODE
TT SW
S4000
I2C SDA
I2C SCL
DBUS7-0
STT-1. 0
CPU CK
ION STB
PB FPGA CS
ION RESET
CNF D7-0
DCLK
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
PB FPGA TDO
REC FPGA TDO
TCK ALL
TMS ALL
PB FPGA RST
S2200
IN3DA. SY. PRTY
IN2DA. SY. PRTY
IN1DA. SY. PRTY
SDRAM1 DQ
SDRAM BA. A
SDRAM2 DQ
SARAM2 BA. A
CK TG74M
OZFRM
CK 128FS
FS
OZB PIO3-0
PLL BP2-0
DLL RST
OZ OZA PIO5
OZ OZA PIO4. 3
OZ OZA PIO2-0
VDATAA7-0
VERRA
VDATAB7-0
VERRB
VFRAM
VFSTA
VSYNC
FIELD INFO
TG74M CHL2
MFV PB S4-1
MFV PB SCK
HPR:4-105...106...
HPR:4-103 104
MFV PB AUD
1/2. 3/4. 5/6. 7/8. 9/A. B/C
AUASDA0-5
AUAVLD
AUAVST
VALID
STO
APR:19-109...
APR:19-115
APR:19-116
AUA5FLD
AUA5FLD0-2
MFV AU5F ID0-2
APR:19-119...
MFV PB DUB AUD
AUBSDA0-5
AUBVLD
AUBVST
APR:19-123...
APR:19-129
APR:19-130
AUB5F
AUB5FLD0-2
MFV DUB AU5F ID0-2
APR:19-133...
MONCK
MONITOR31-0
OZ MON32
OZ MON31-0
OZ MON
25-20
D2805 BVC2 ERI
D2804 BVC2 ERR
D2803 BAC2 ERR
D2802 AVC2 ERI
D2801 AVC2 ERR
D2800 AAC2 ERR
OZ FRM
TG74M MON3
128FS
MPX SS SWP7
SYS DBU2 D7-0
SYS STAT2 1. 0
SYS CLK OZ
OZ STRB
OZ CS3-0
OZ BUSY
OZ RST
CPU DB
CPU STAT
CK CPU
CPU STRB
CPU CS
ECO BUSY
RST
TDO OZONE
TDO ION3
TCK ALL
TMS ALL
TRST ALL
NC
2/7 ION3
7/7 IC405
7/7 IC404
7/7 S400

3-46

EQ-109 (6/7)

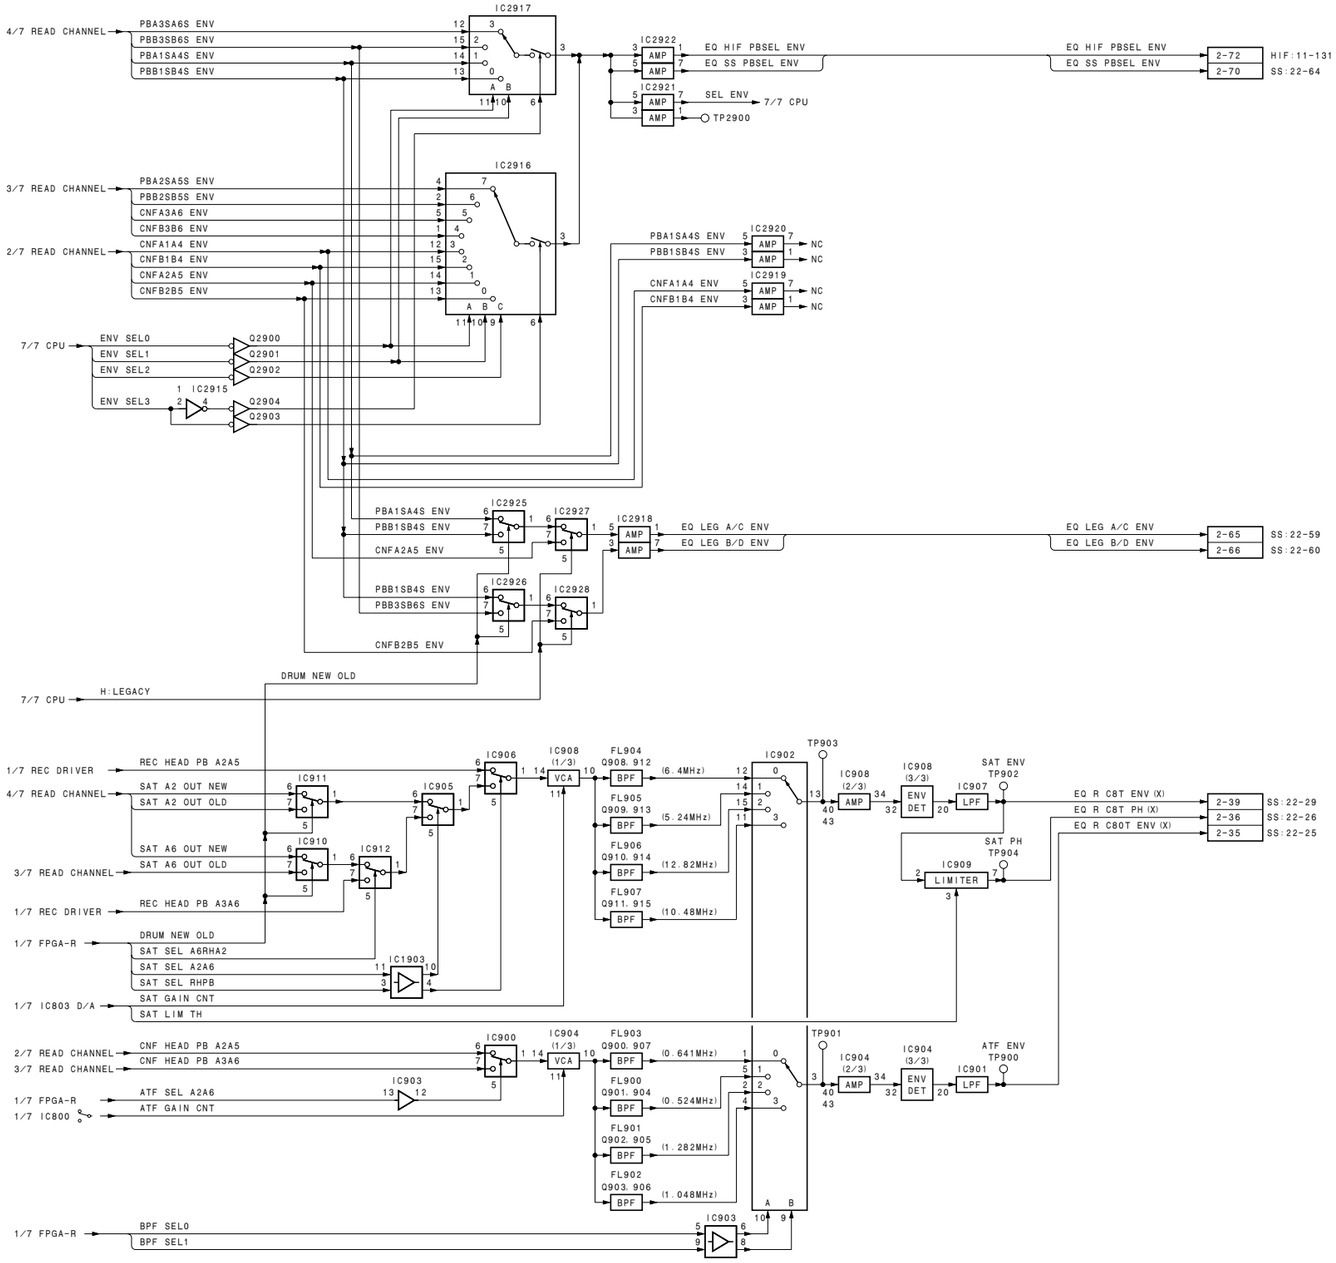

EQ-109 (6/7)

3-47

EQ-109 (7/7)

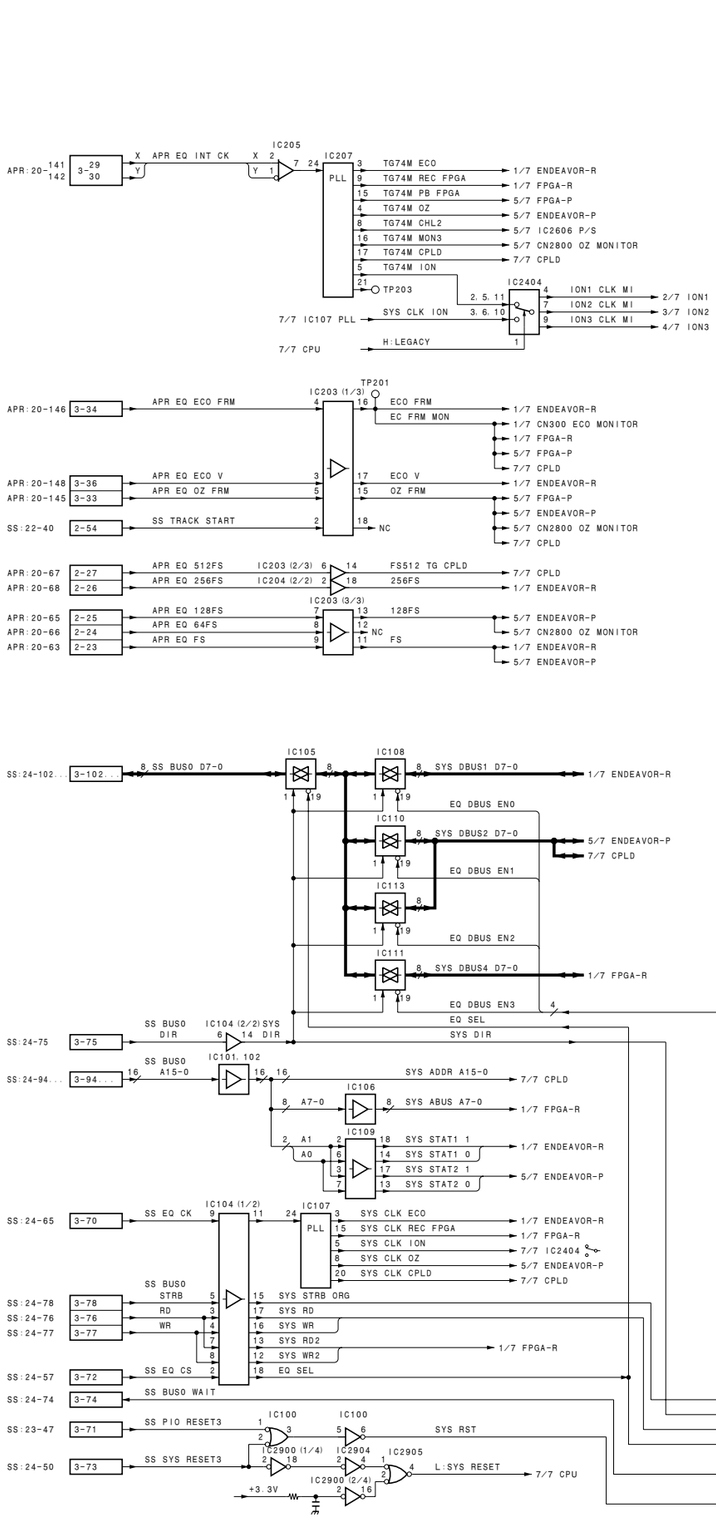

3-48

EQ-109 (7/7)

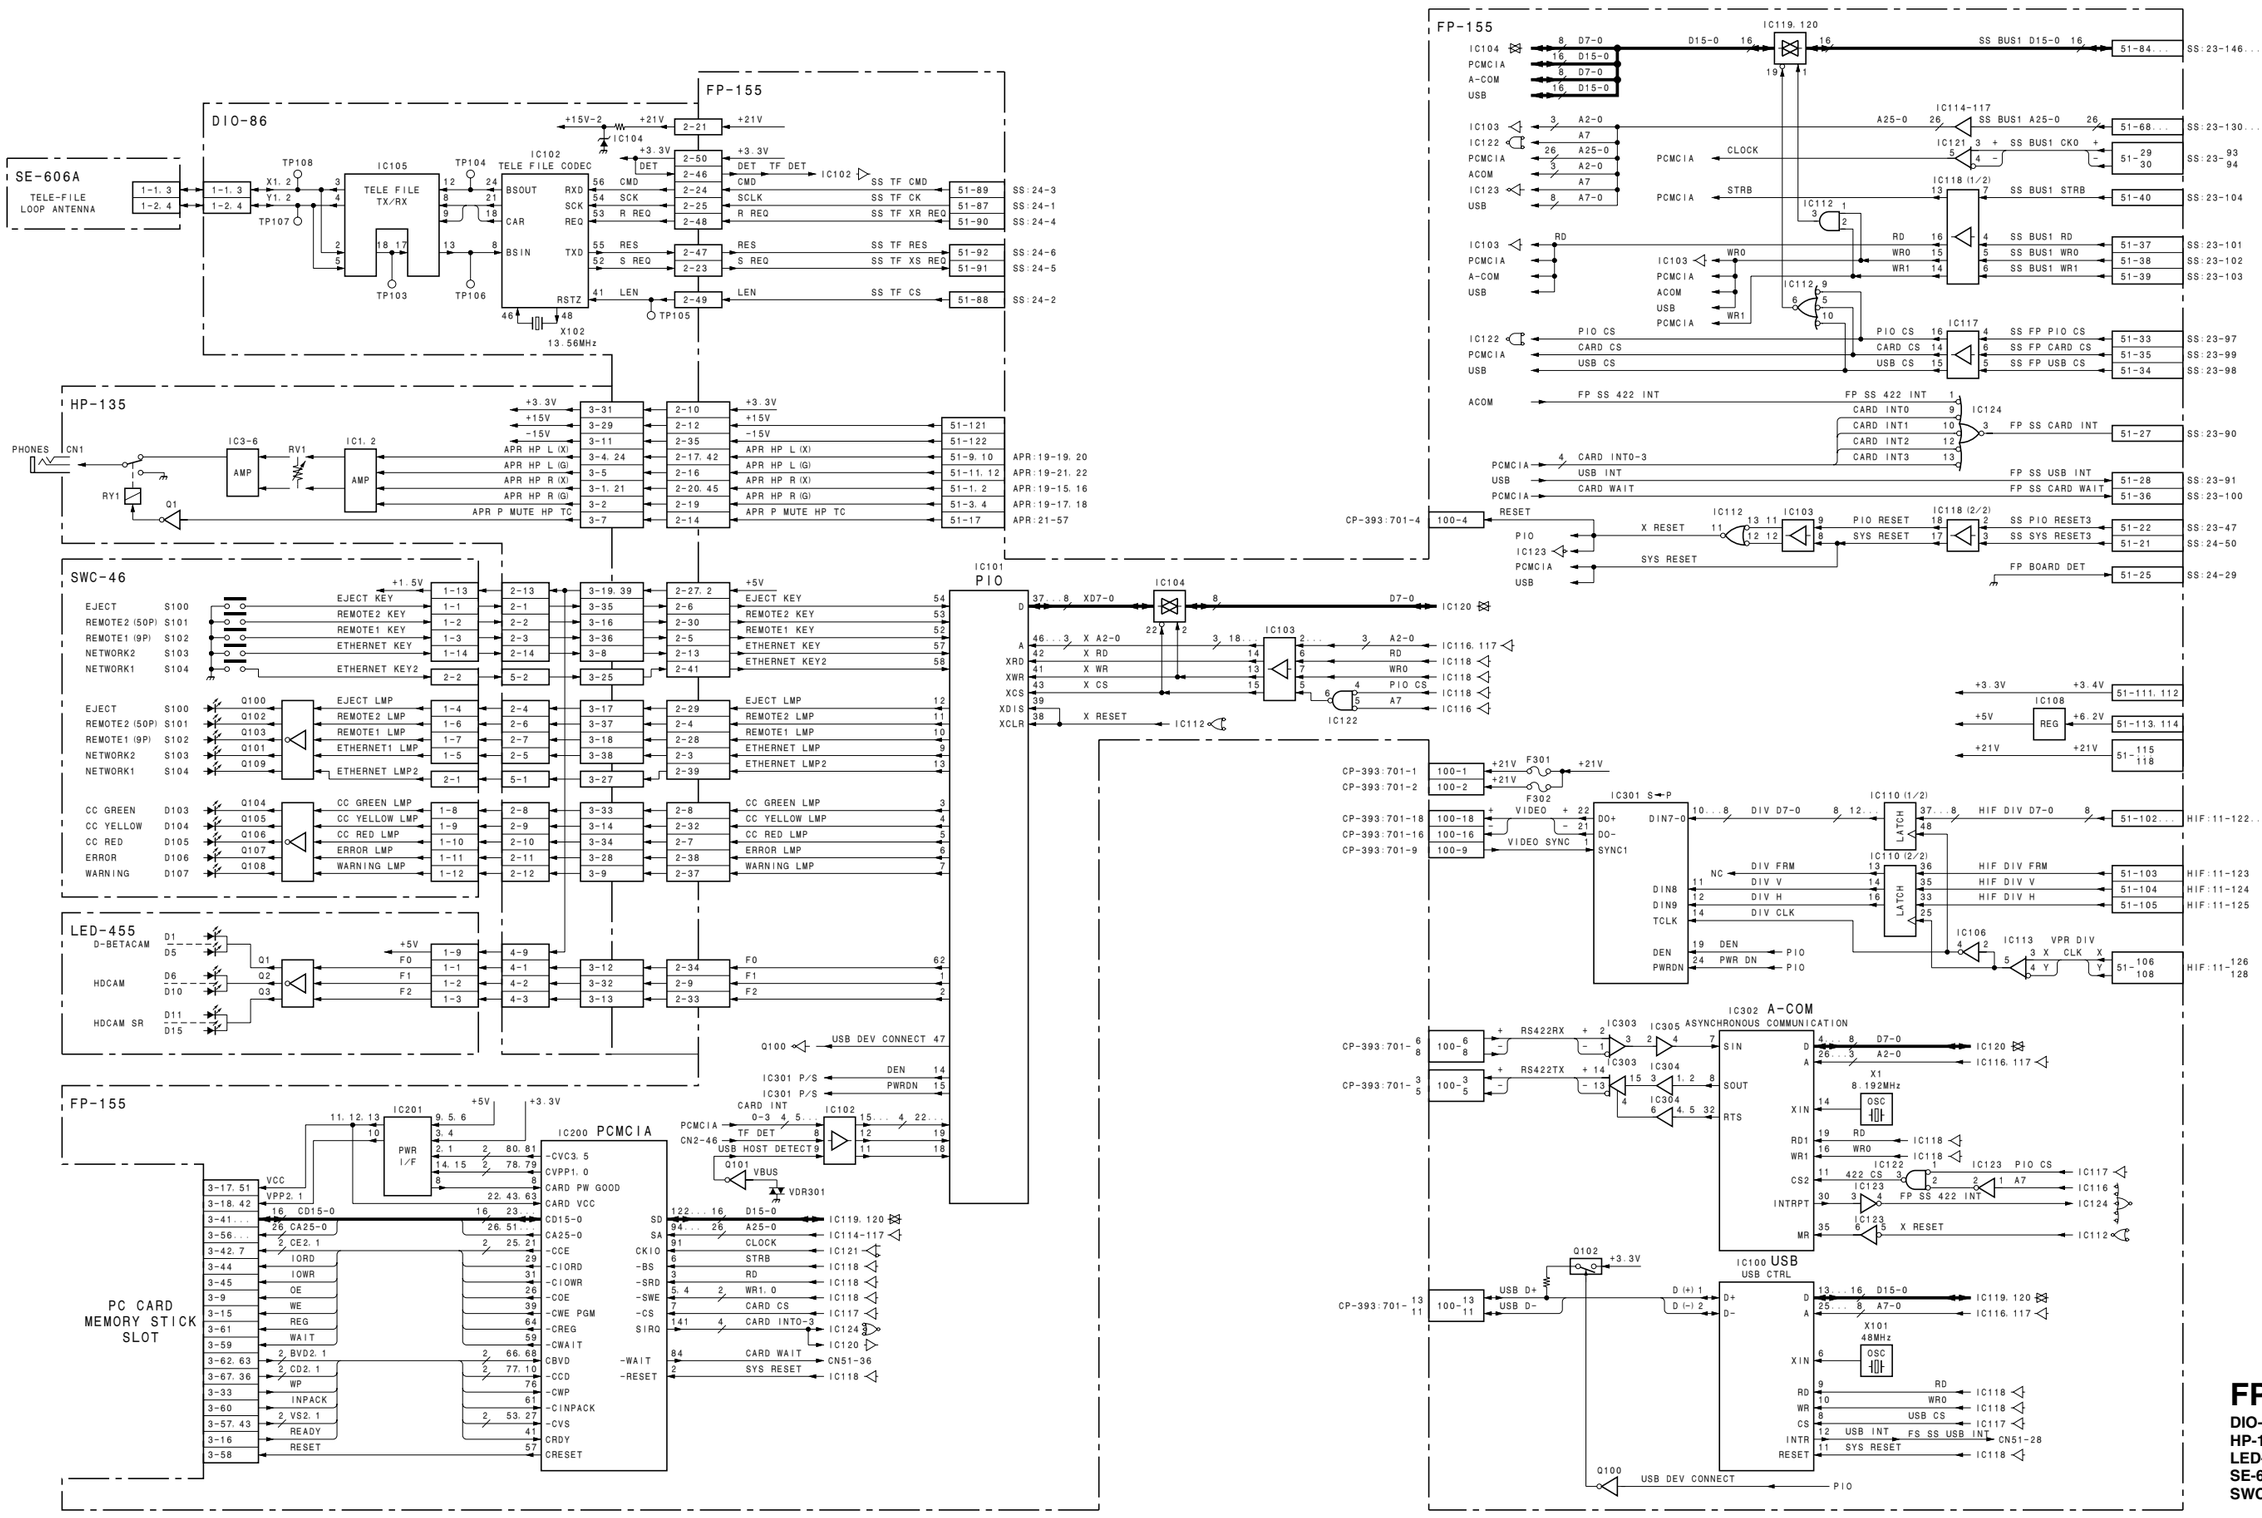

FP-155
DIO-86
HP-135
LED-455
SE-606A
SWC-46

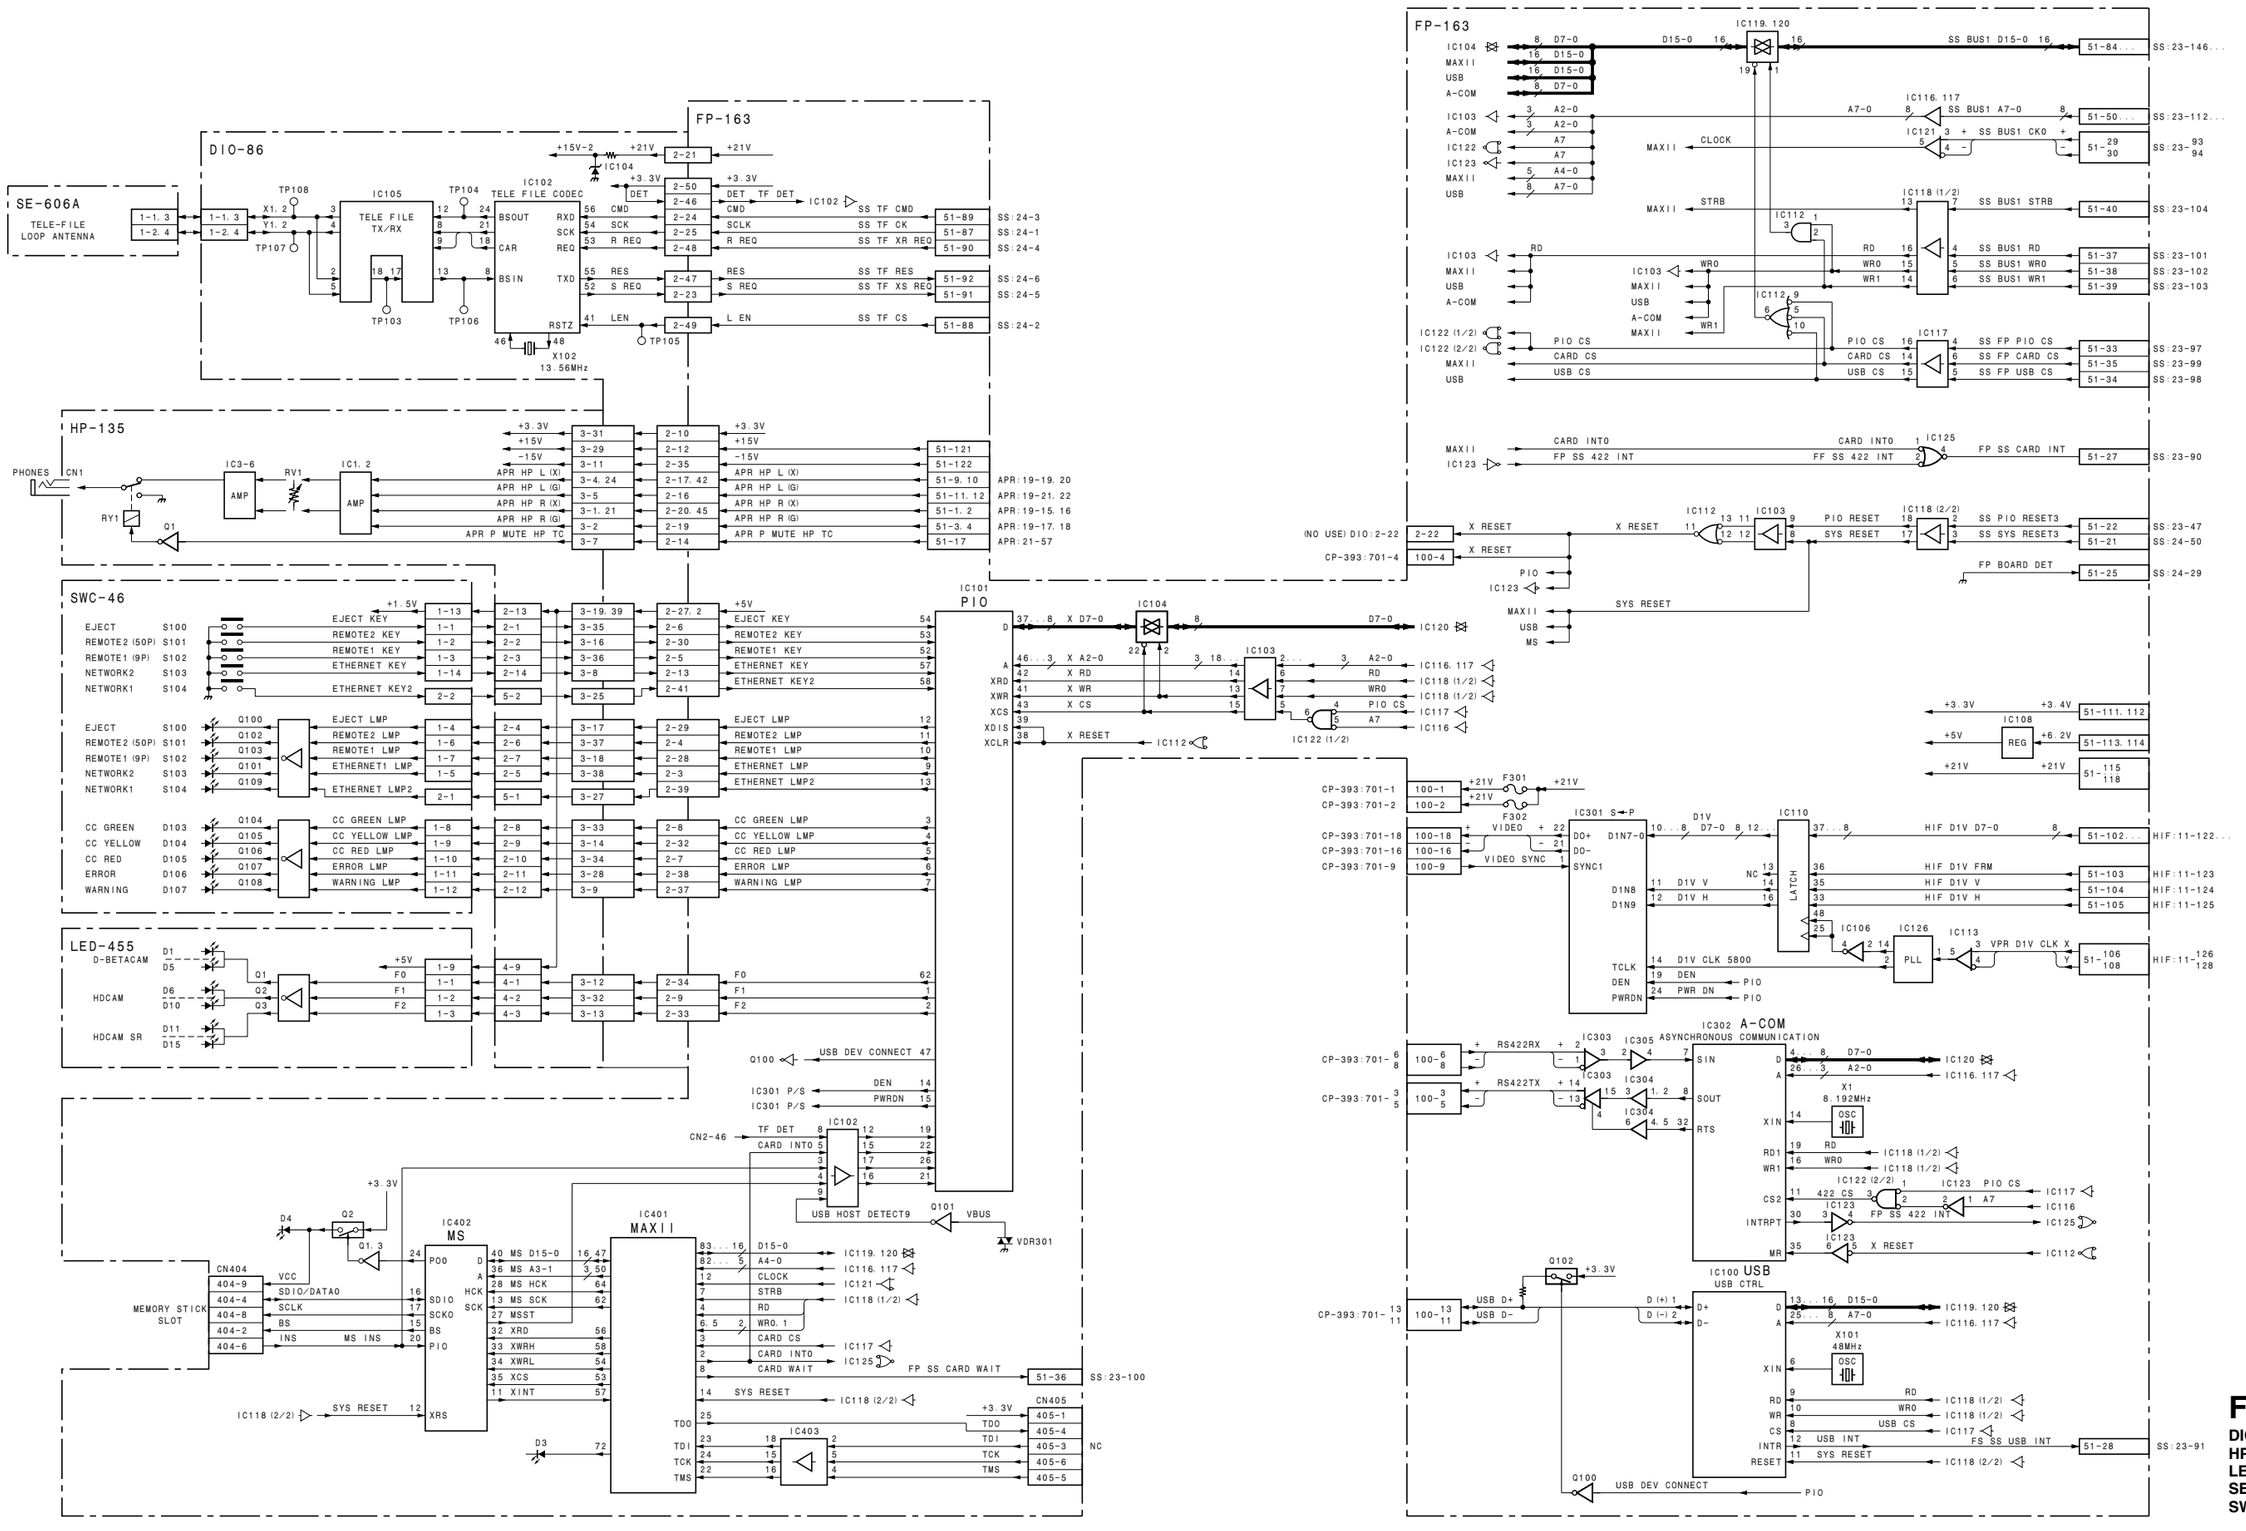

FP-163
DIO-86
HP-135
LED-455
SE-606A
SWC-46

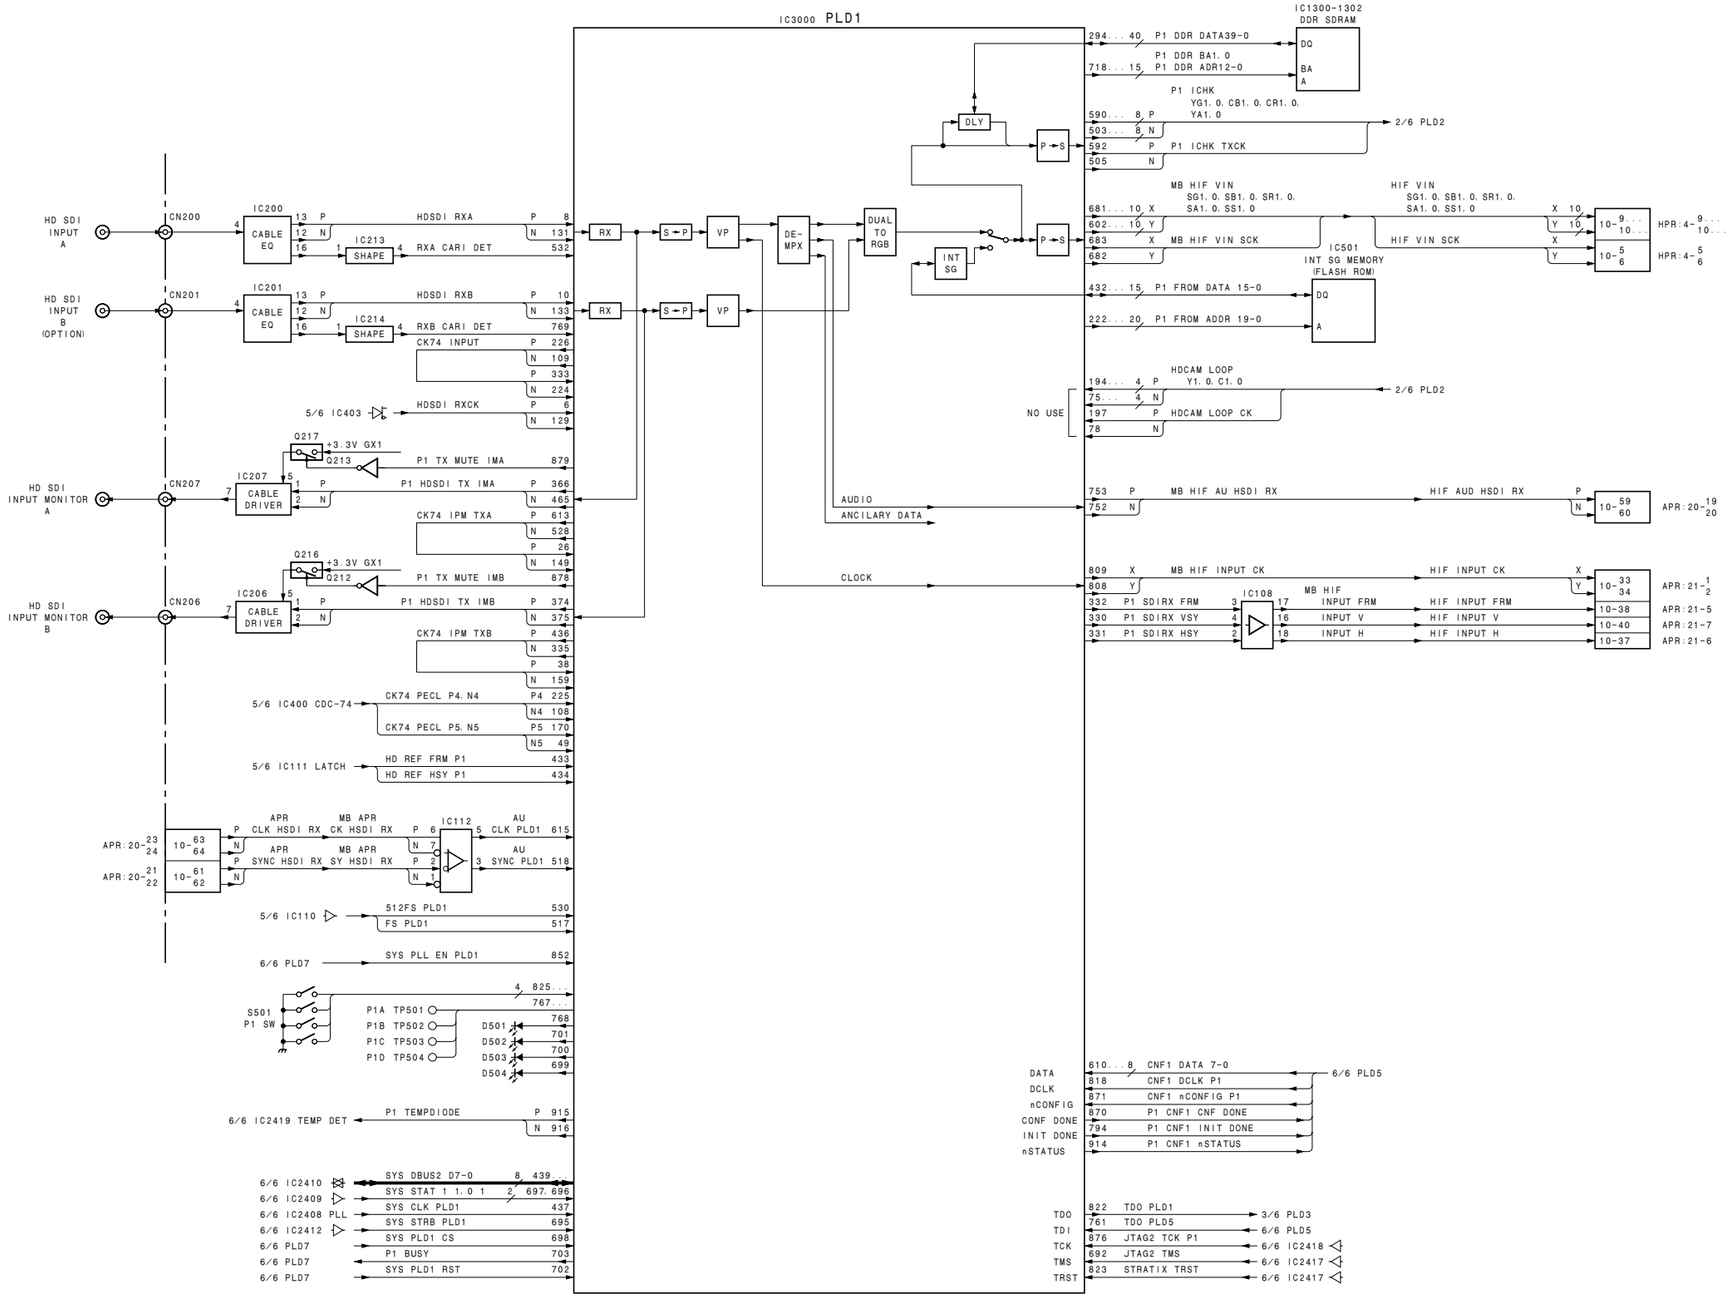

HIF-46 (1/6)
BOARD NO. 1-874-862-11

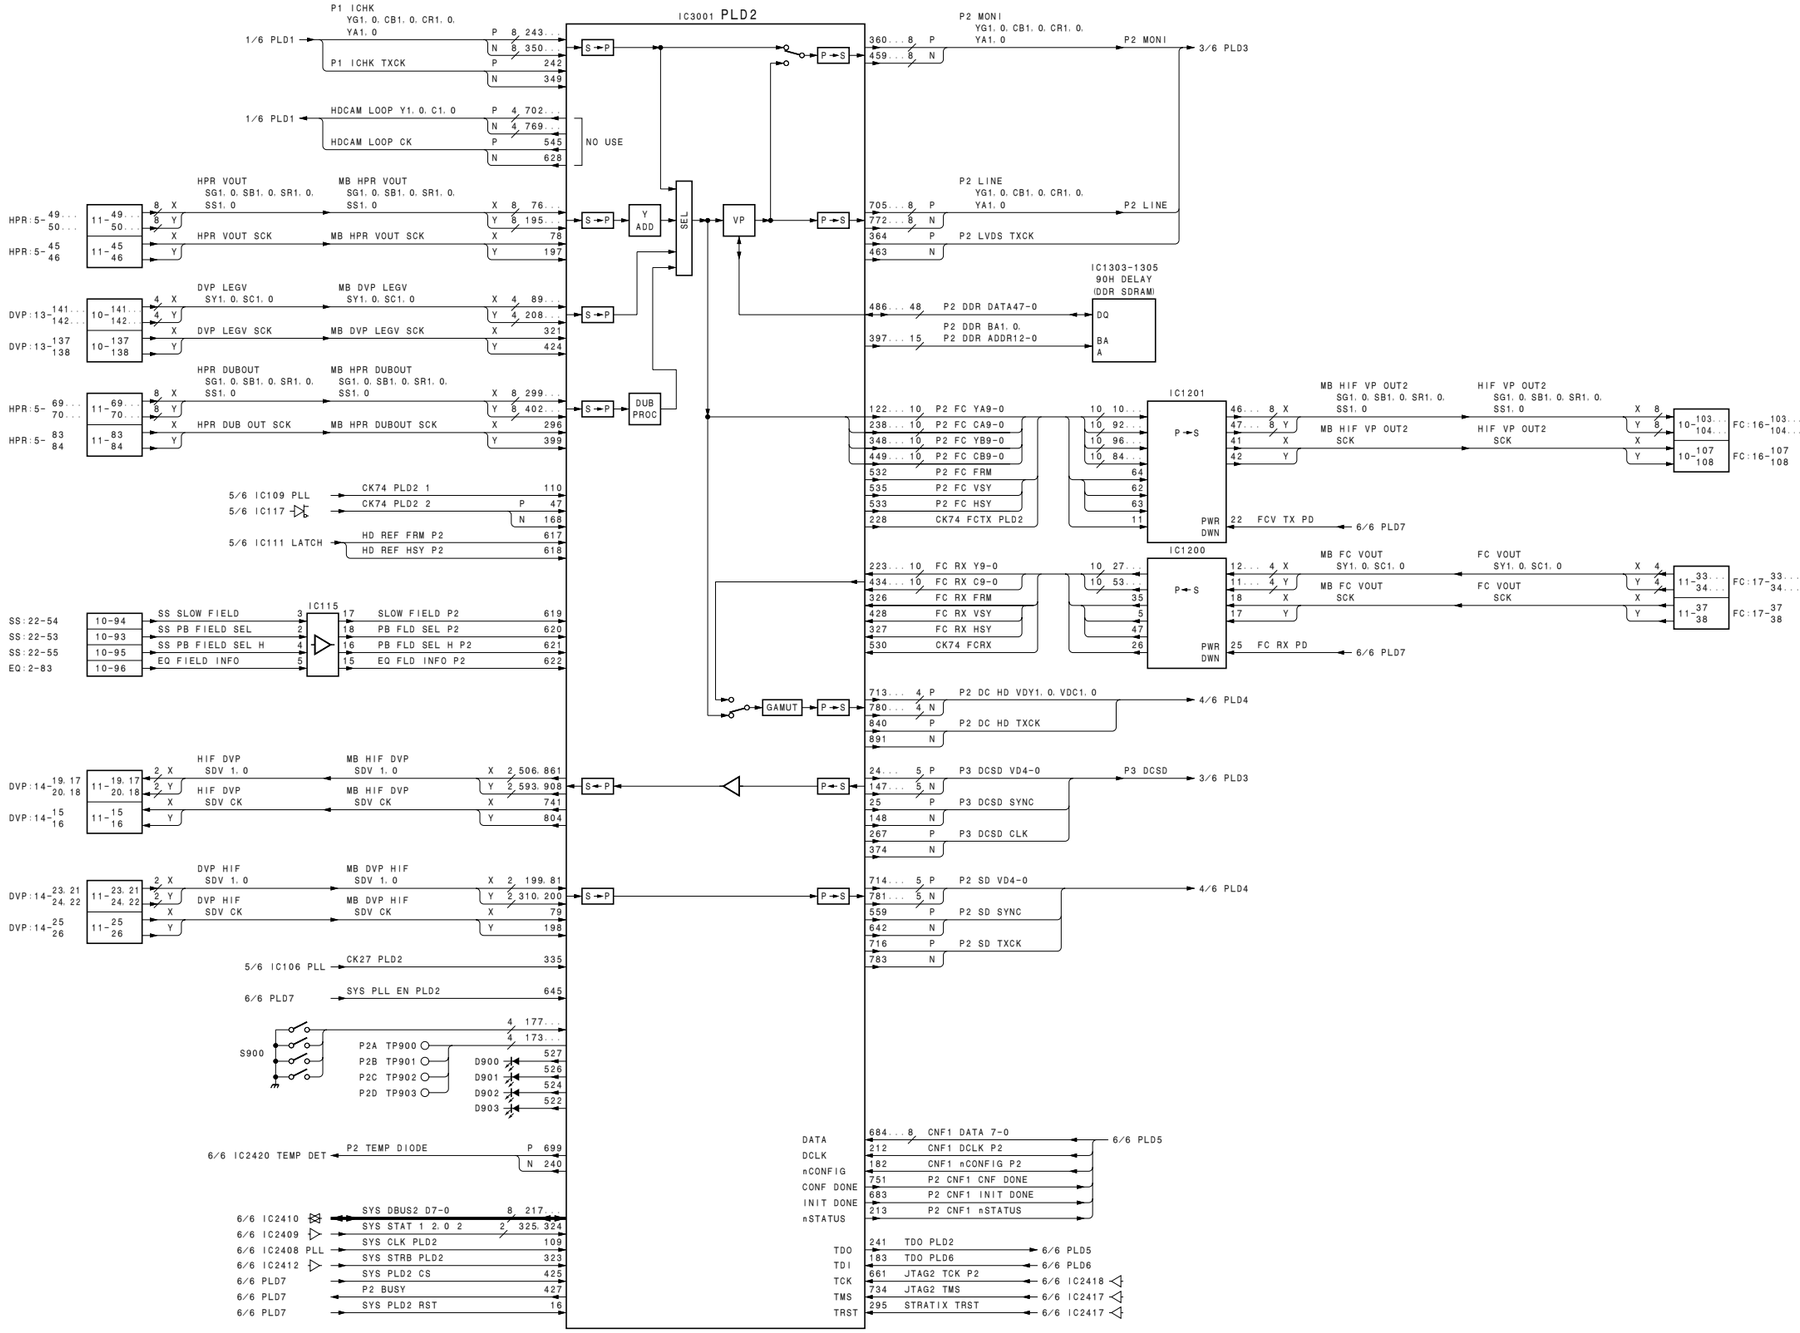

HIF-46 (2/6)
BOARD NO. 1-874-862-11

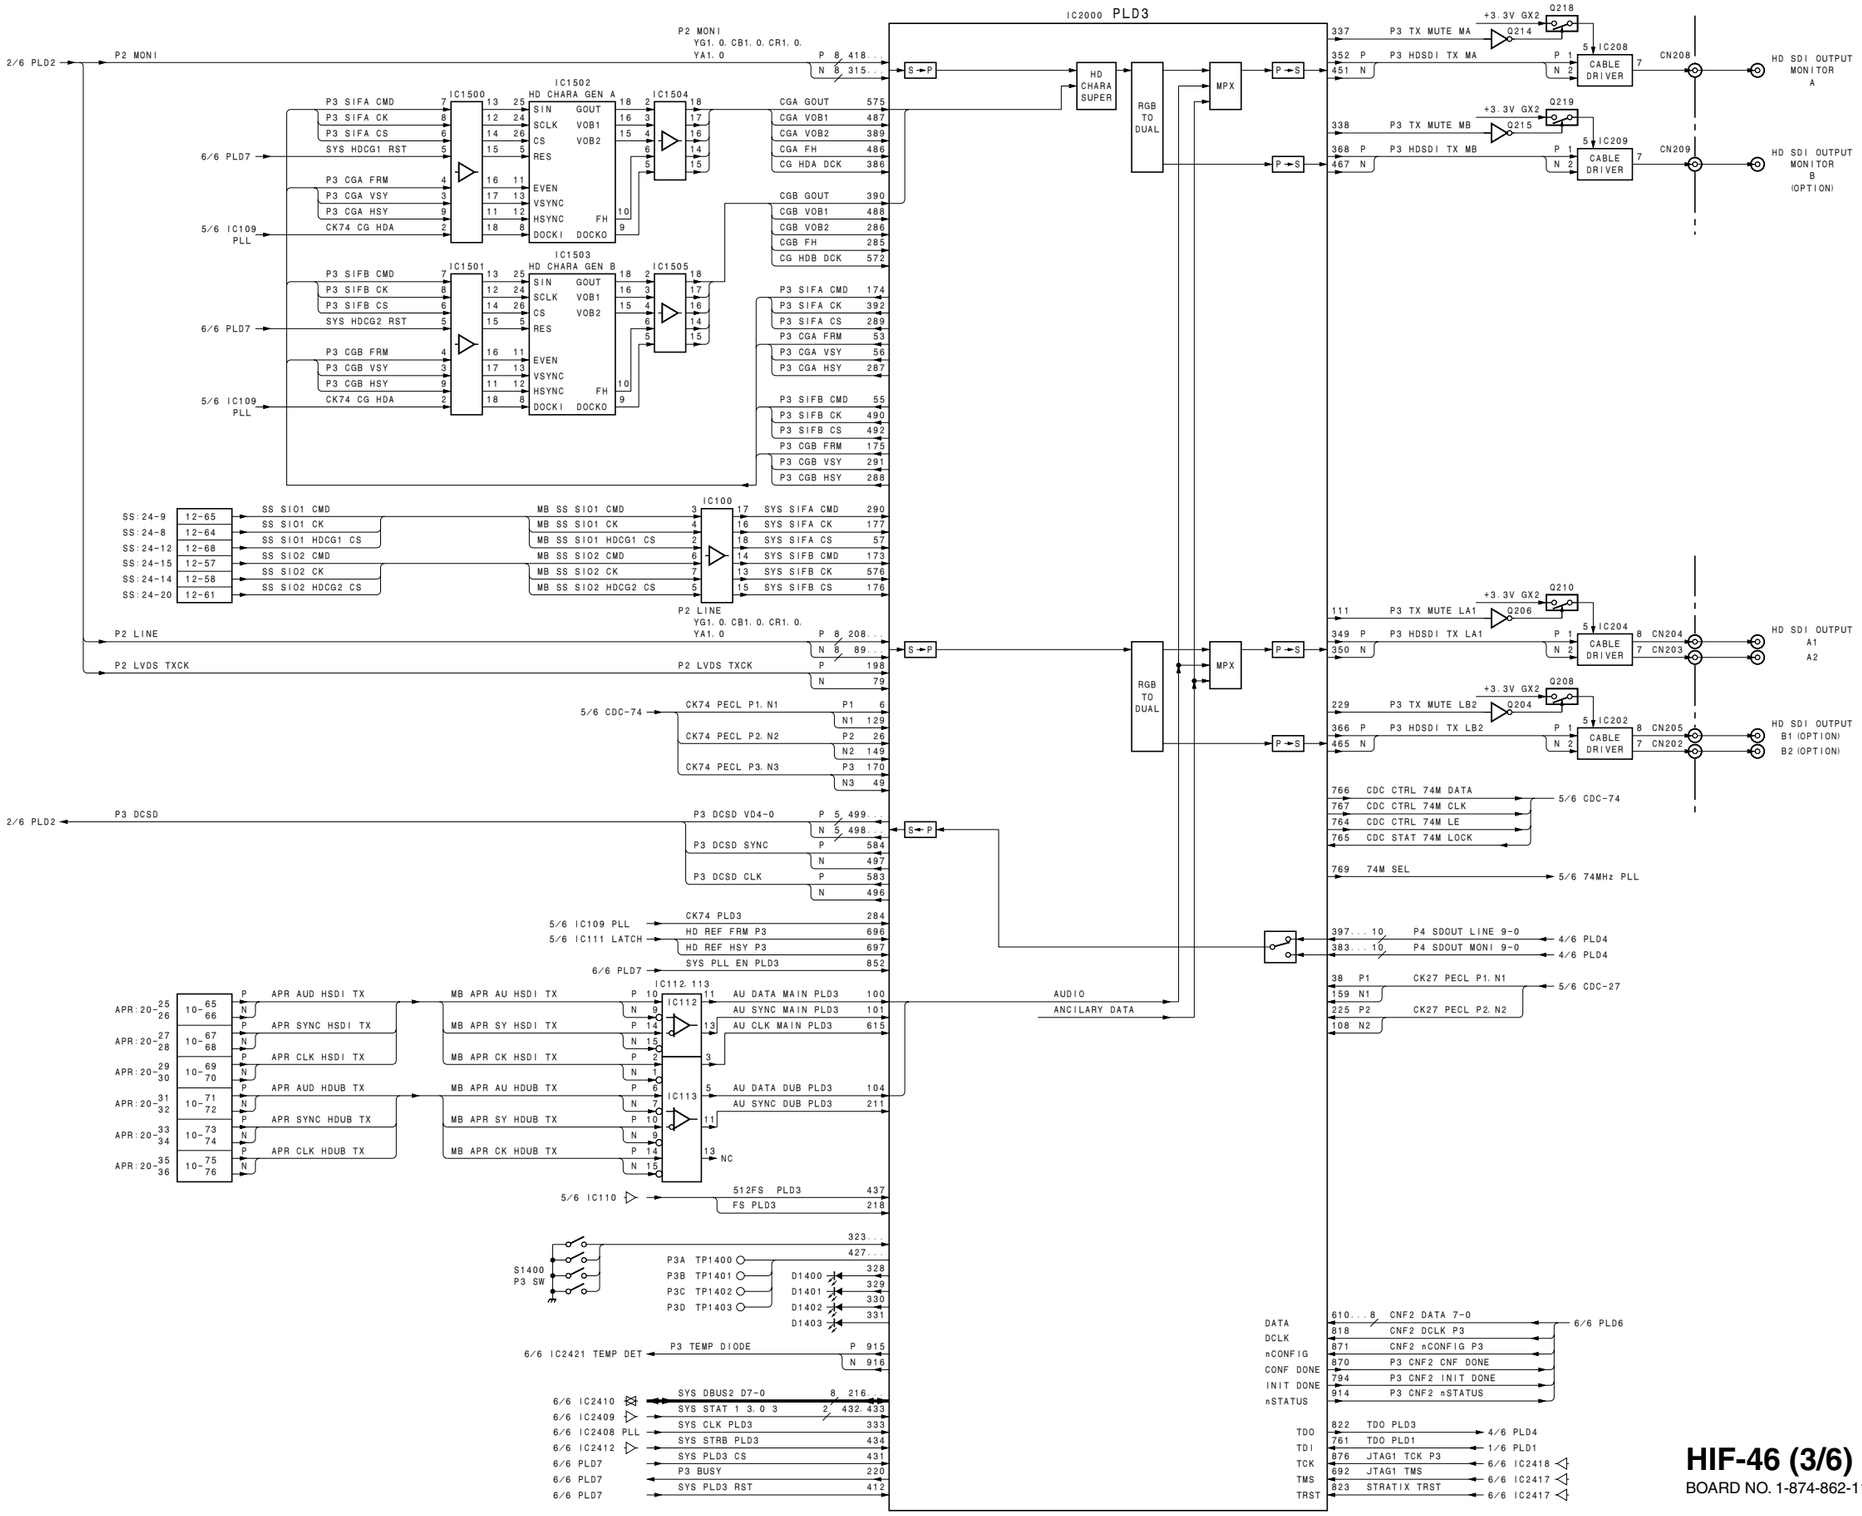

HIF-46 (3/6)
BOARD NO. 1-874-862-11

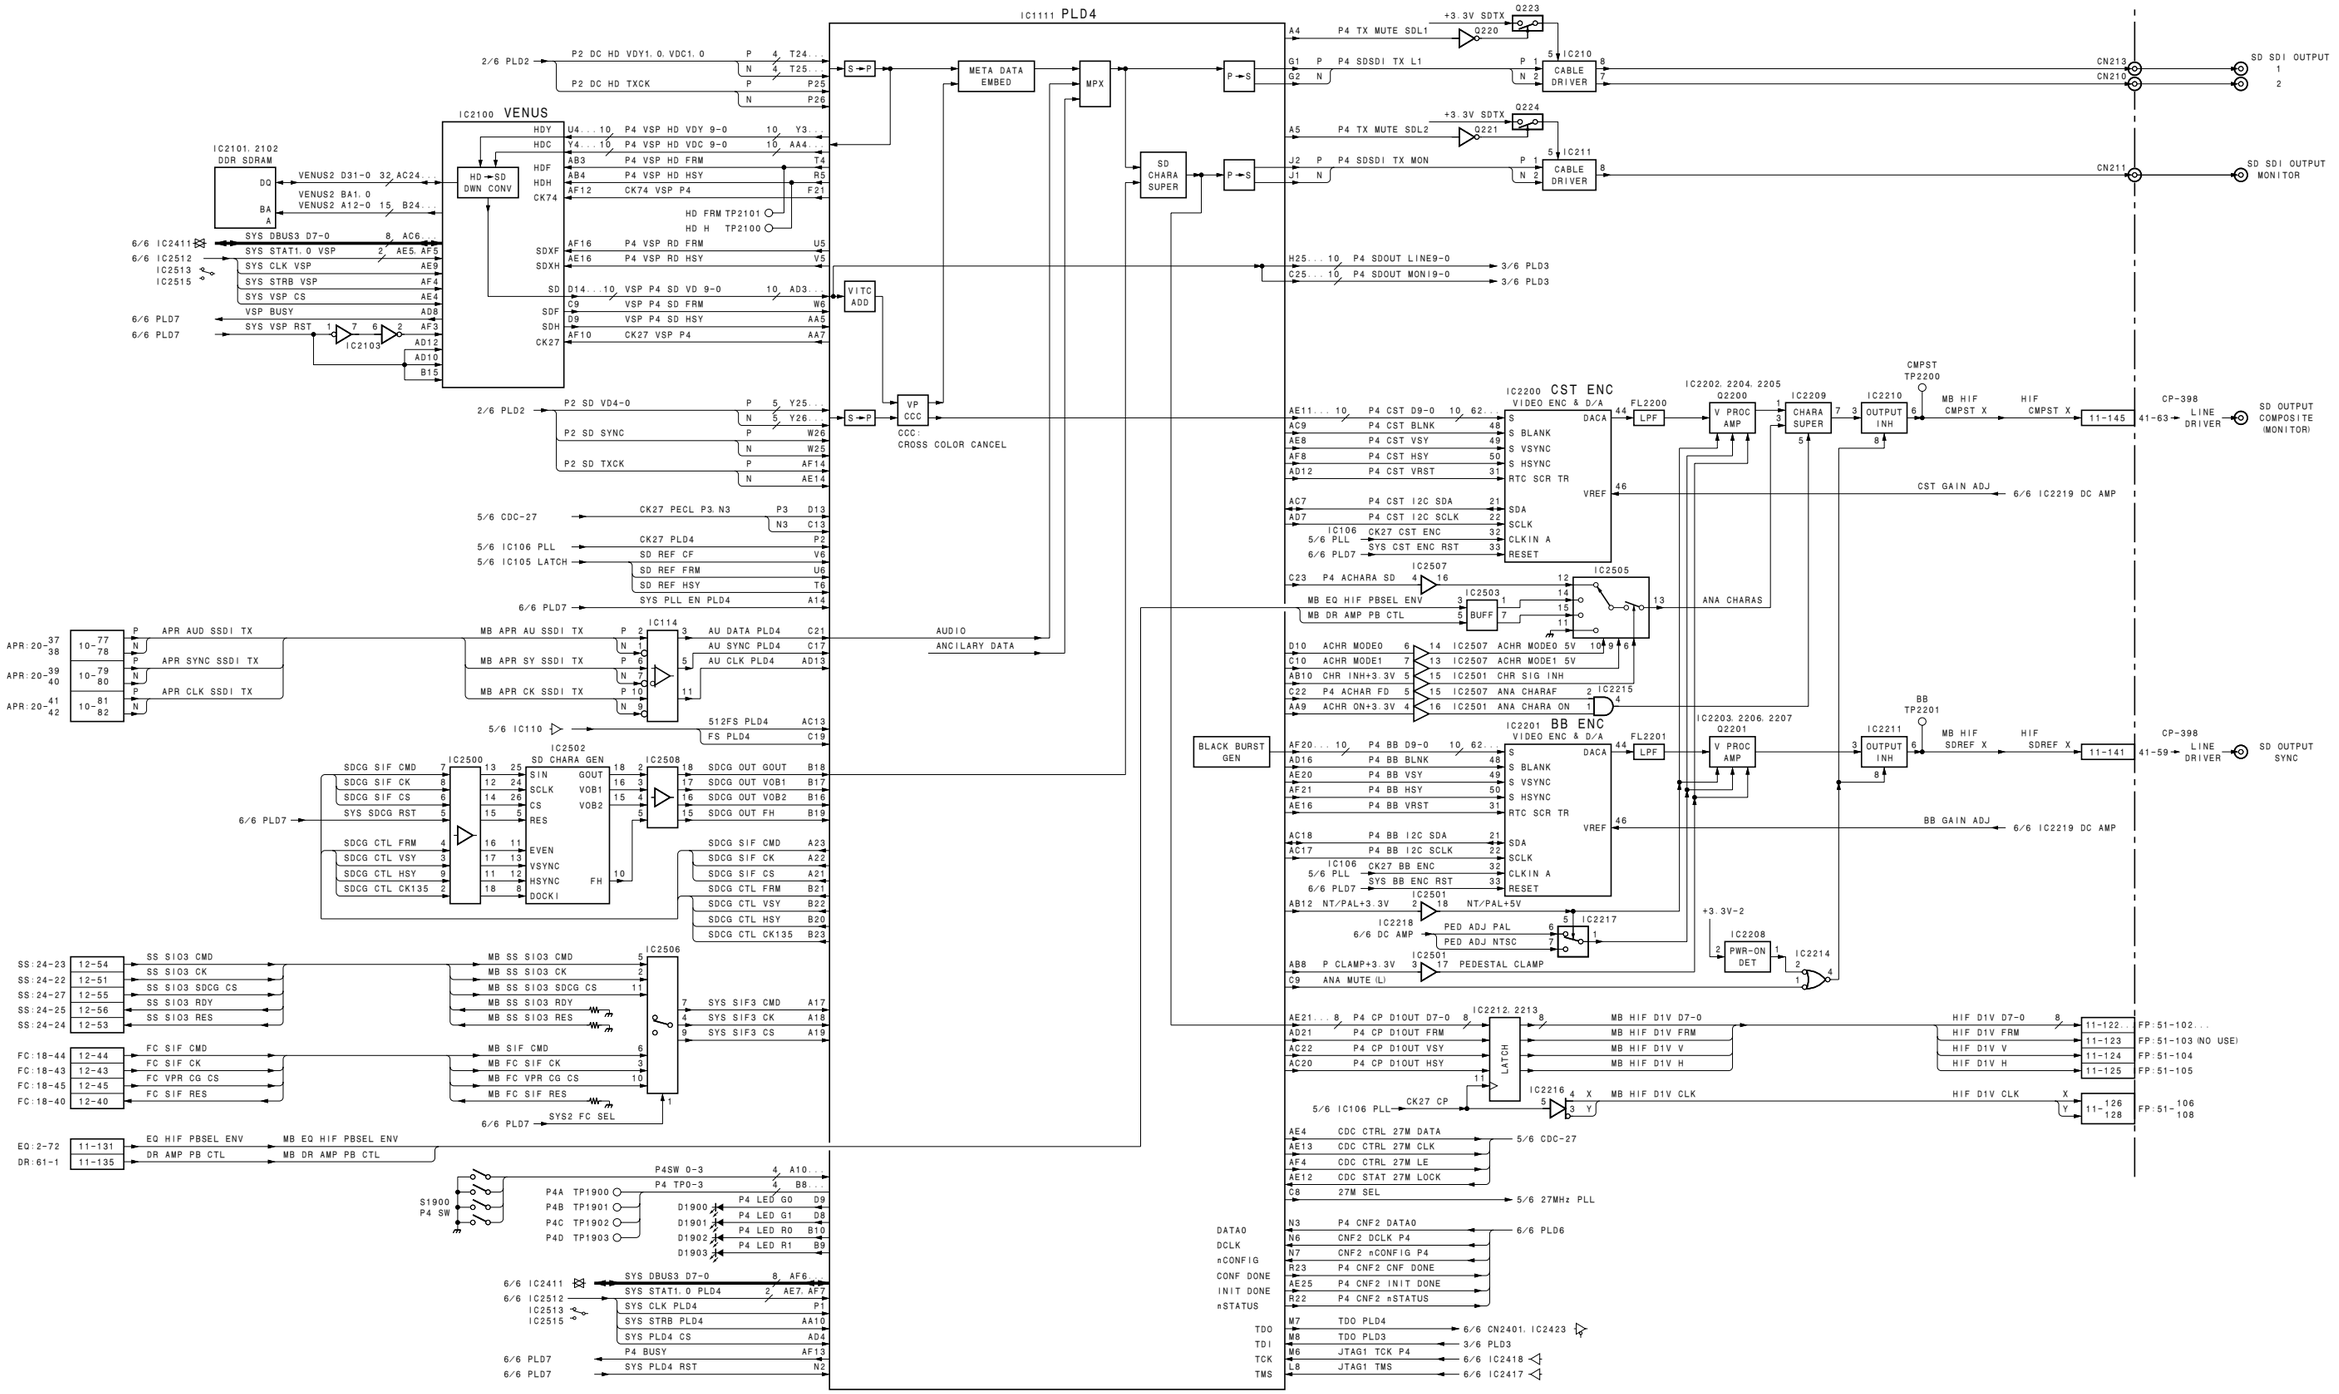
IC1111 PLD4
IC2100 VENUS
IC2101, 2102 DDR SDRAM
HD→SD DWN CONV
META DATA EMBED
MPX
SD CHARA SUPER
VITC ADD
VP CCC
CCC: CROSS COLOR CANCEL
IC2200 CST ENC VIDEO ENC & D/A
IC2201 BB ENC VIDEO ENC & D/A
BLACK BURST GEN
IC114
IC2500 SD CHARA GEN
IC2502
IC2503
IC2505
IC2506
IC2507
IC2508
IC2501
IC2503, 2206, 2207 Q2201
IC2202, 2204, 2205 Q2200
IC2208 PWR-ON DET
IC2210 OUTPUT INH
IC2211 OUTPUT INH
IC2212, 2213 LATCH
IC2214
IC2215
IC2216
IC2217
IC2218 6/6 DC AMP
IC2103
IC210 CABLE DRIVER
IC211 CABLE DRIVER
Q220
Q221
Q223
Q224
FL2200 LPF
FL2201 LPF
V PROC AMP
CHARA SUPER
CP-398 LINE DRIVER
CMPST TP2200
BB TP2201
HD FRM TP2101
HD H TP2100
S1900 P4 SW
CN213
CN210
CN211
SD SDI OUTPUT 1
SD SDI OUTPUT 2
SD SDI OUTPUT MONITOR
SD OUTPUT COMPOSITE (MONITOR)
SD OUTPUT SYNC
CST GAIN ADJ
BB GAIN ADJ
ANA CHARAS
AUDIO ANCILLARY DATA
6/6 IC2219 DC AMP
3/6 PLD3
5/6 CDC-27
5/6 27MHz PLL
6/6 PLD6
6/6 CN2401, IC2423
6/6 IC2418
6/6 IC2417

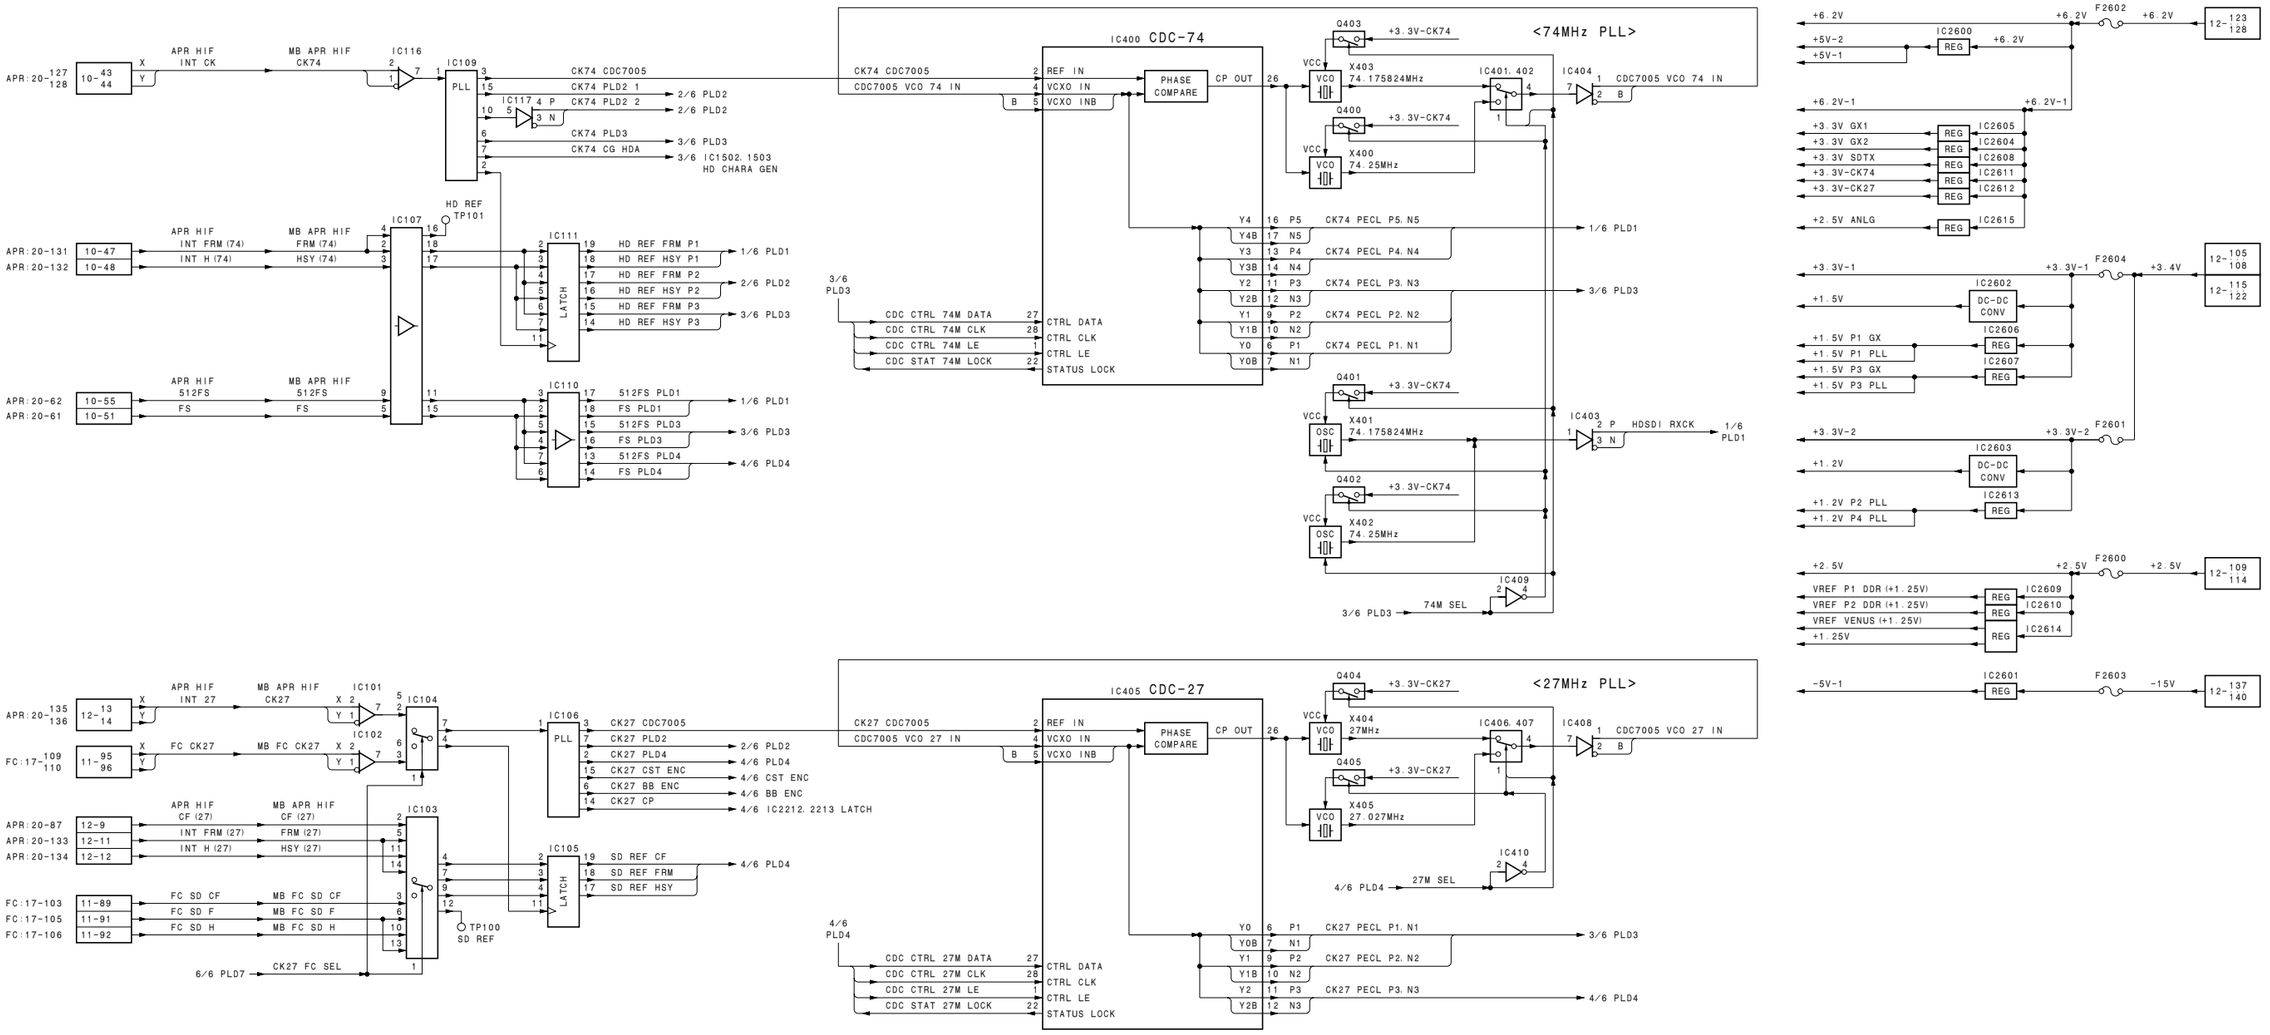

HIF-46 (5/6)
BOARD NO. 1-874-862-11

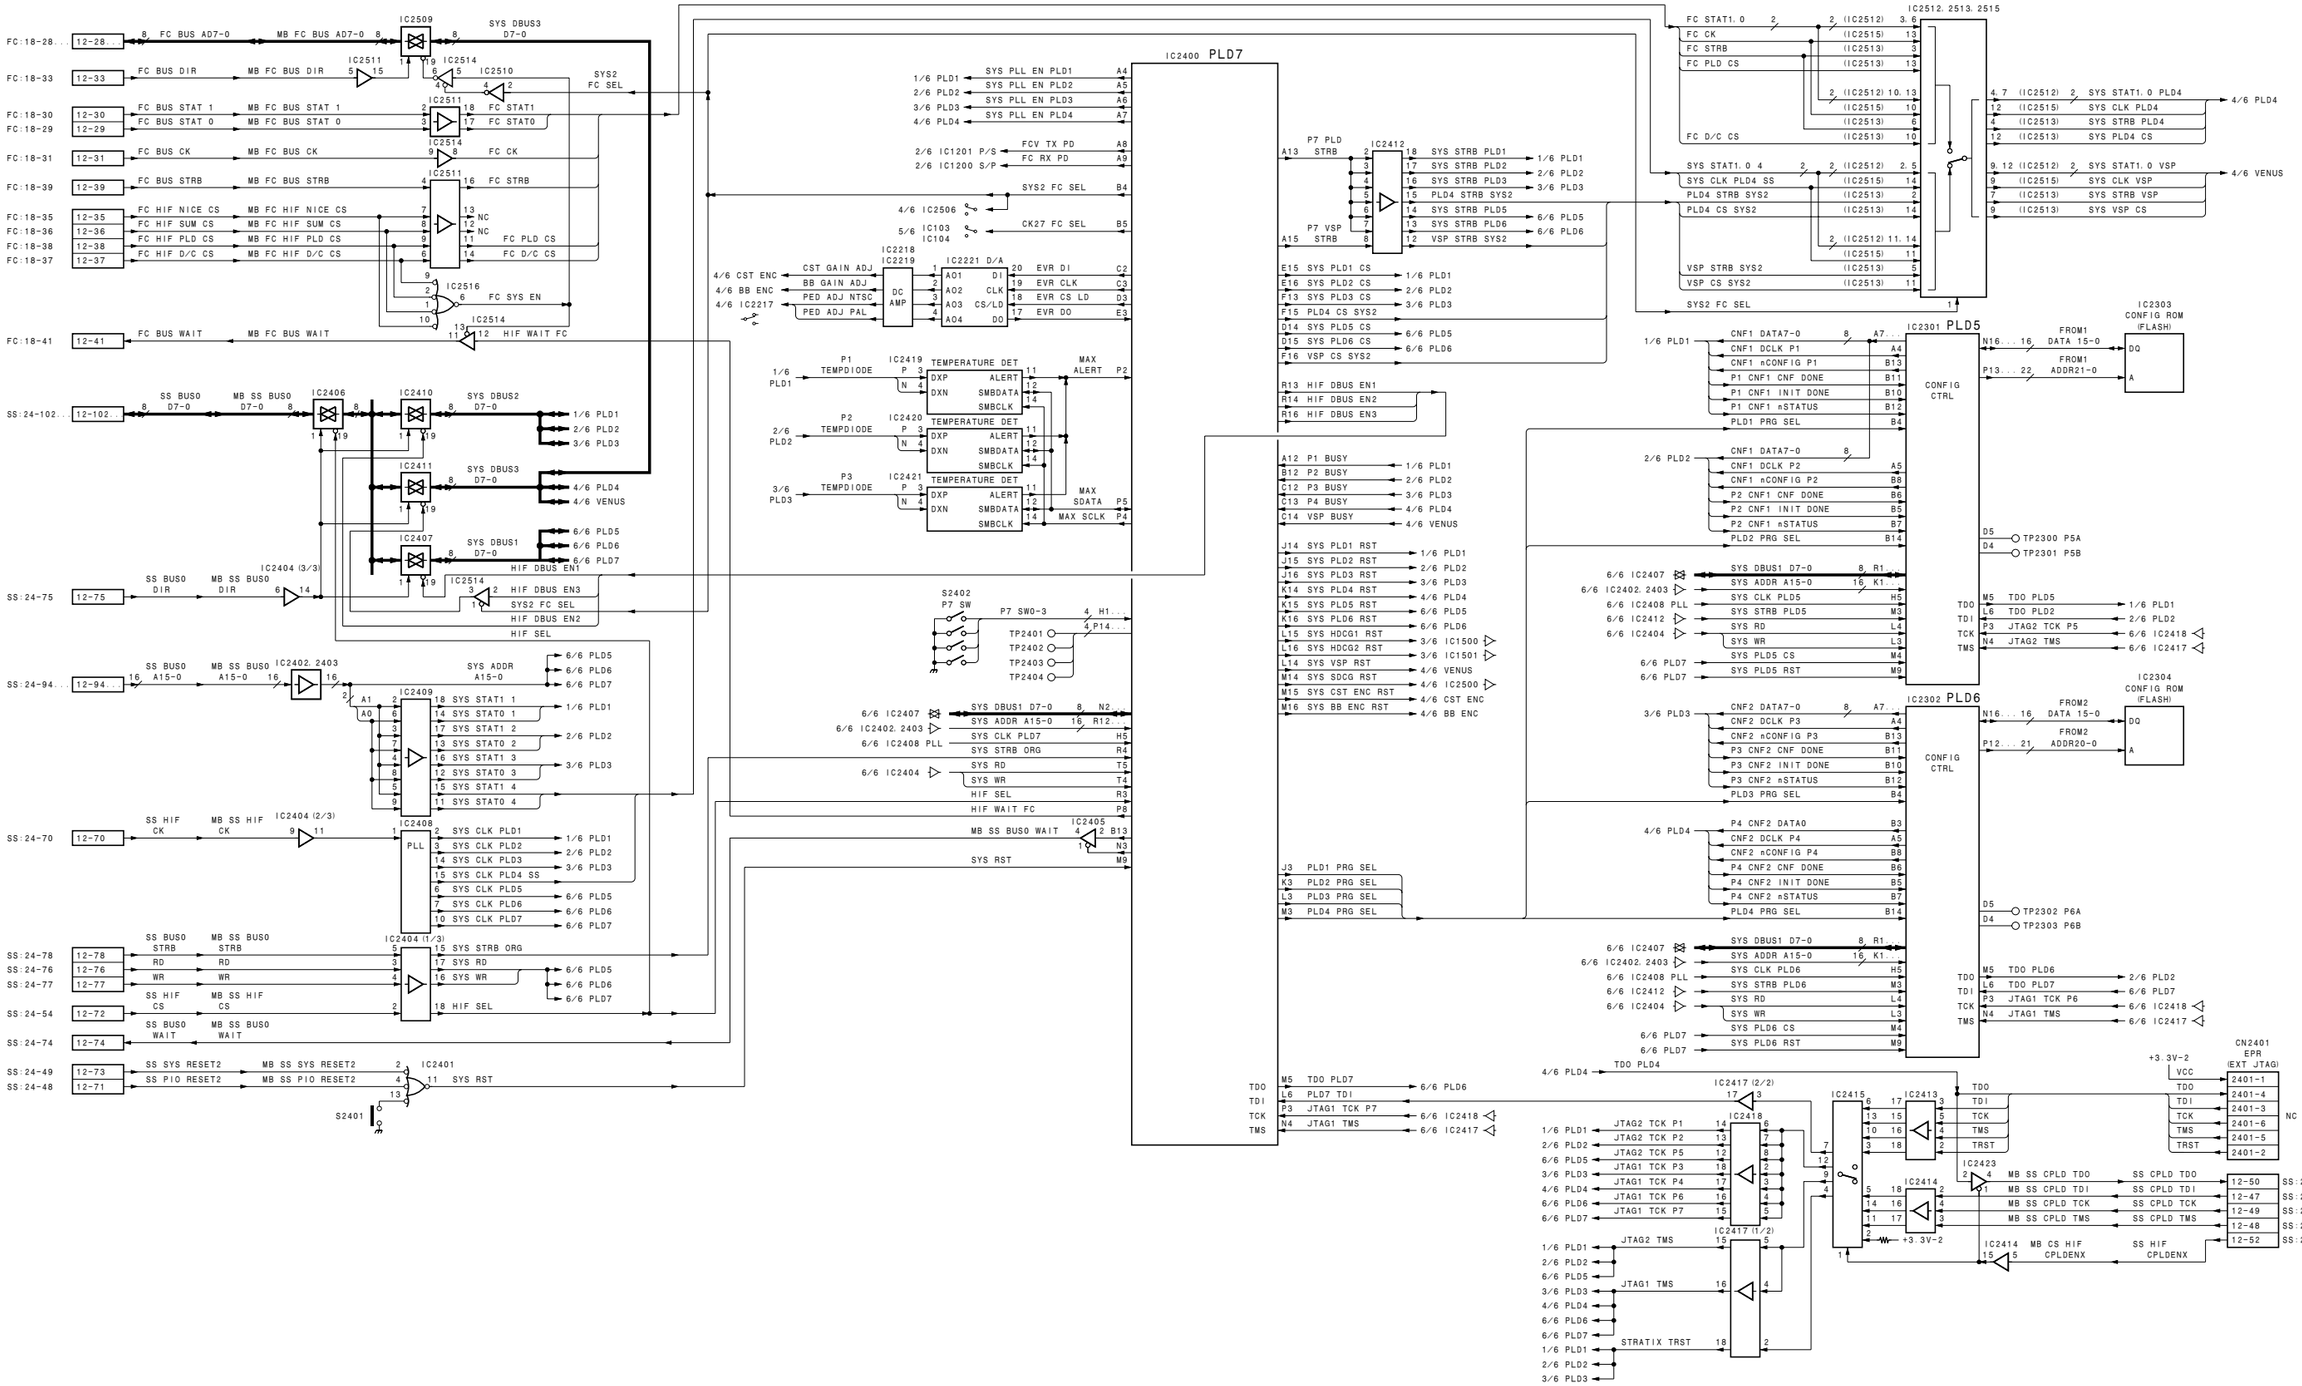

HIF-46 (6/6)
BOARD NO. 1-874-862-11

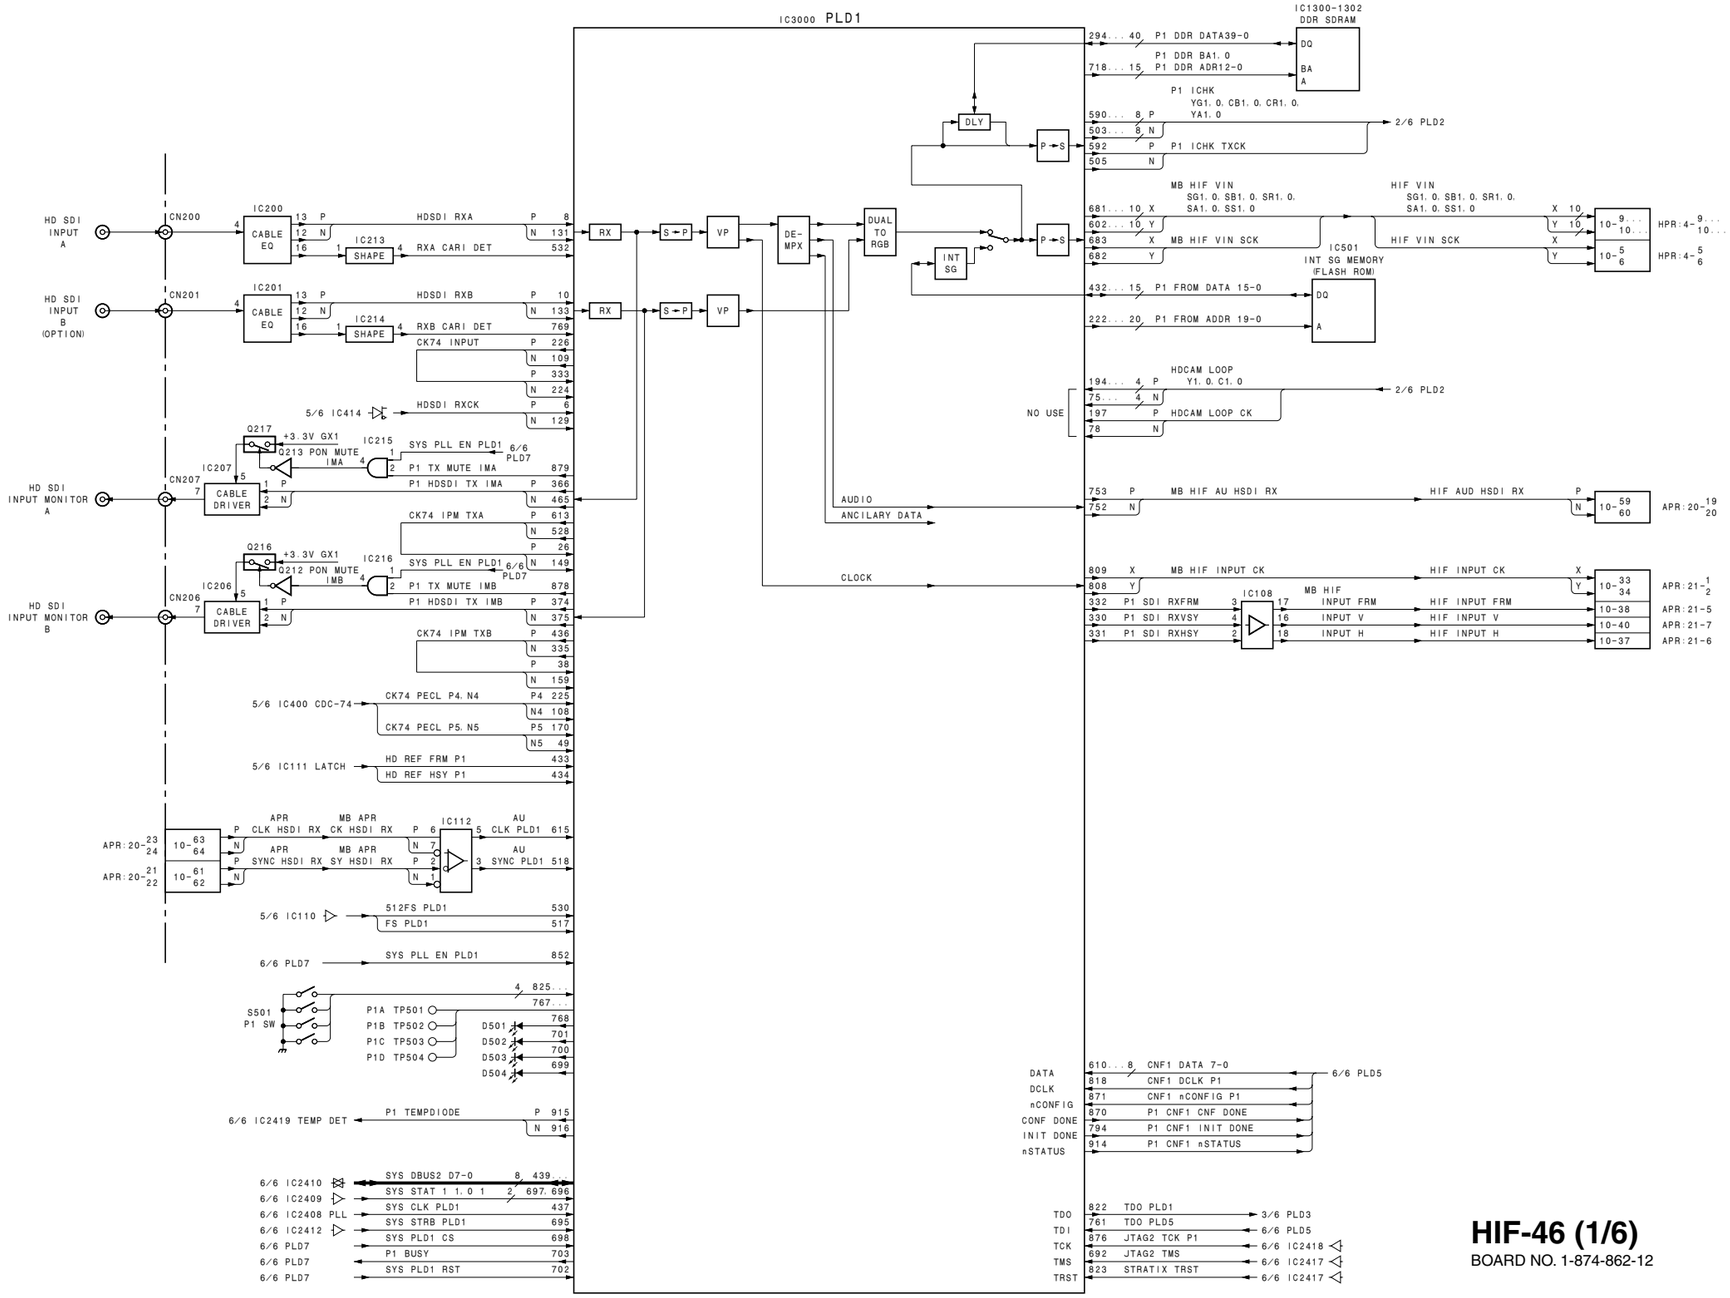

HIF-46 (1/6)
BOARD NO. 1-874-862-12

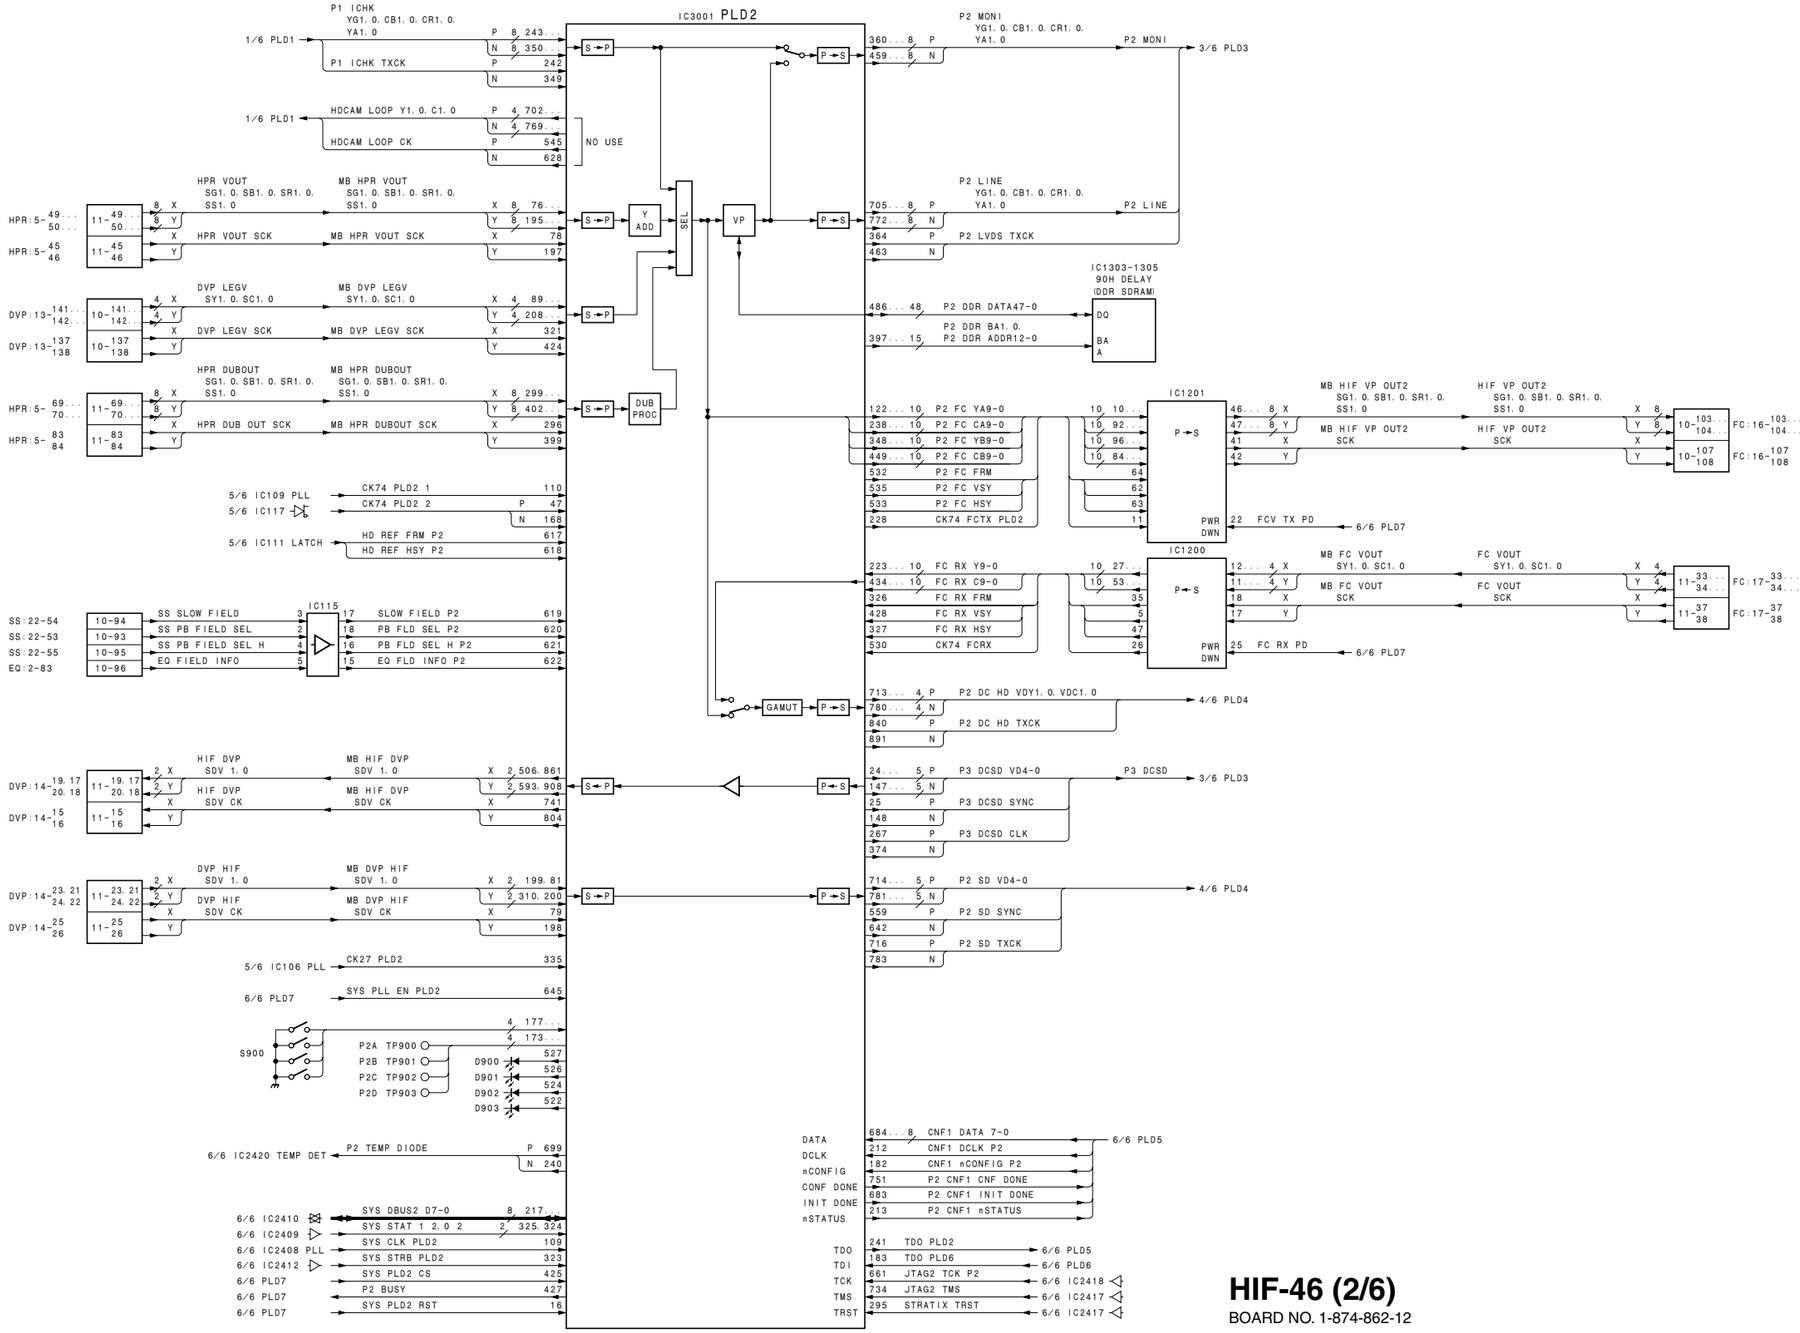

HIF-46 (2/6)
BOARD NO. 1-874-862-12

HIF-46 (3/6) **SUFFIX: -12**

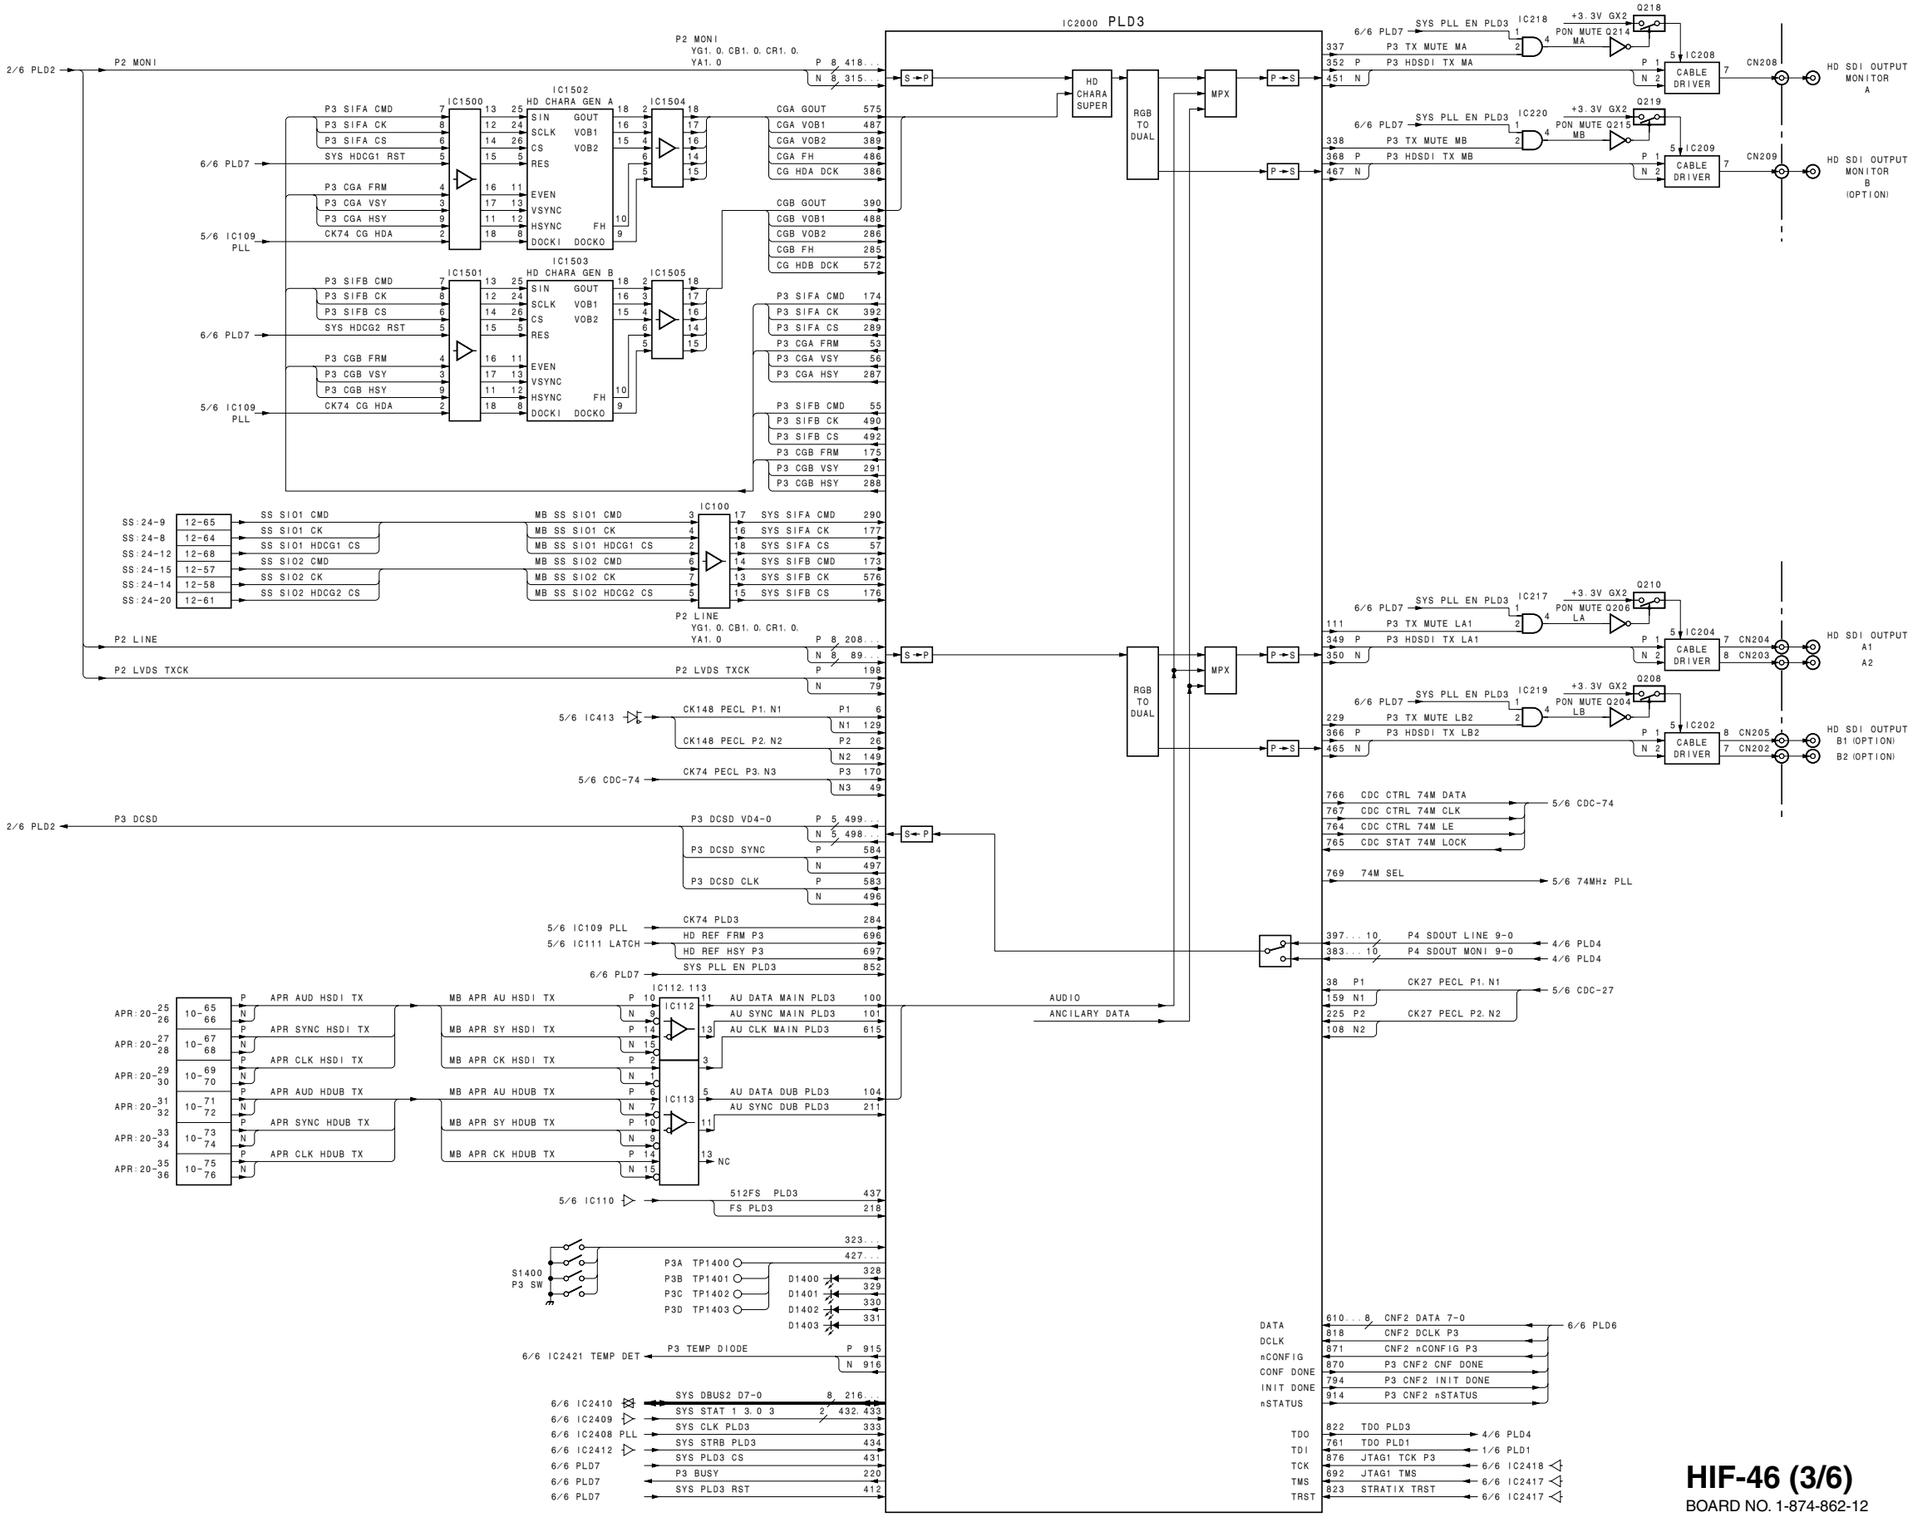

HIF-46 (3/6)
BOARD NO. 1-874-862-12

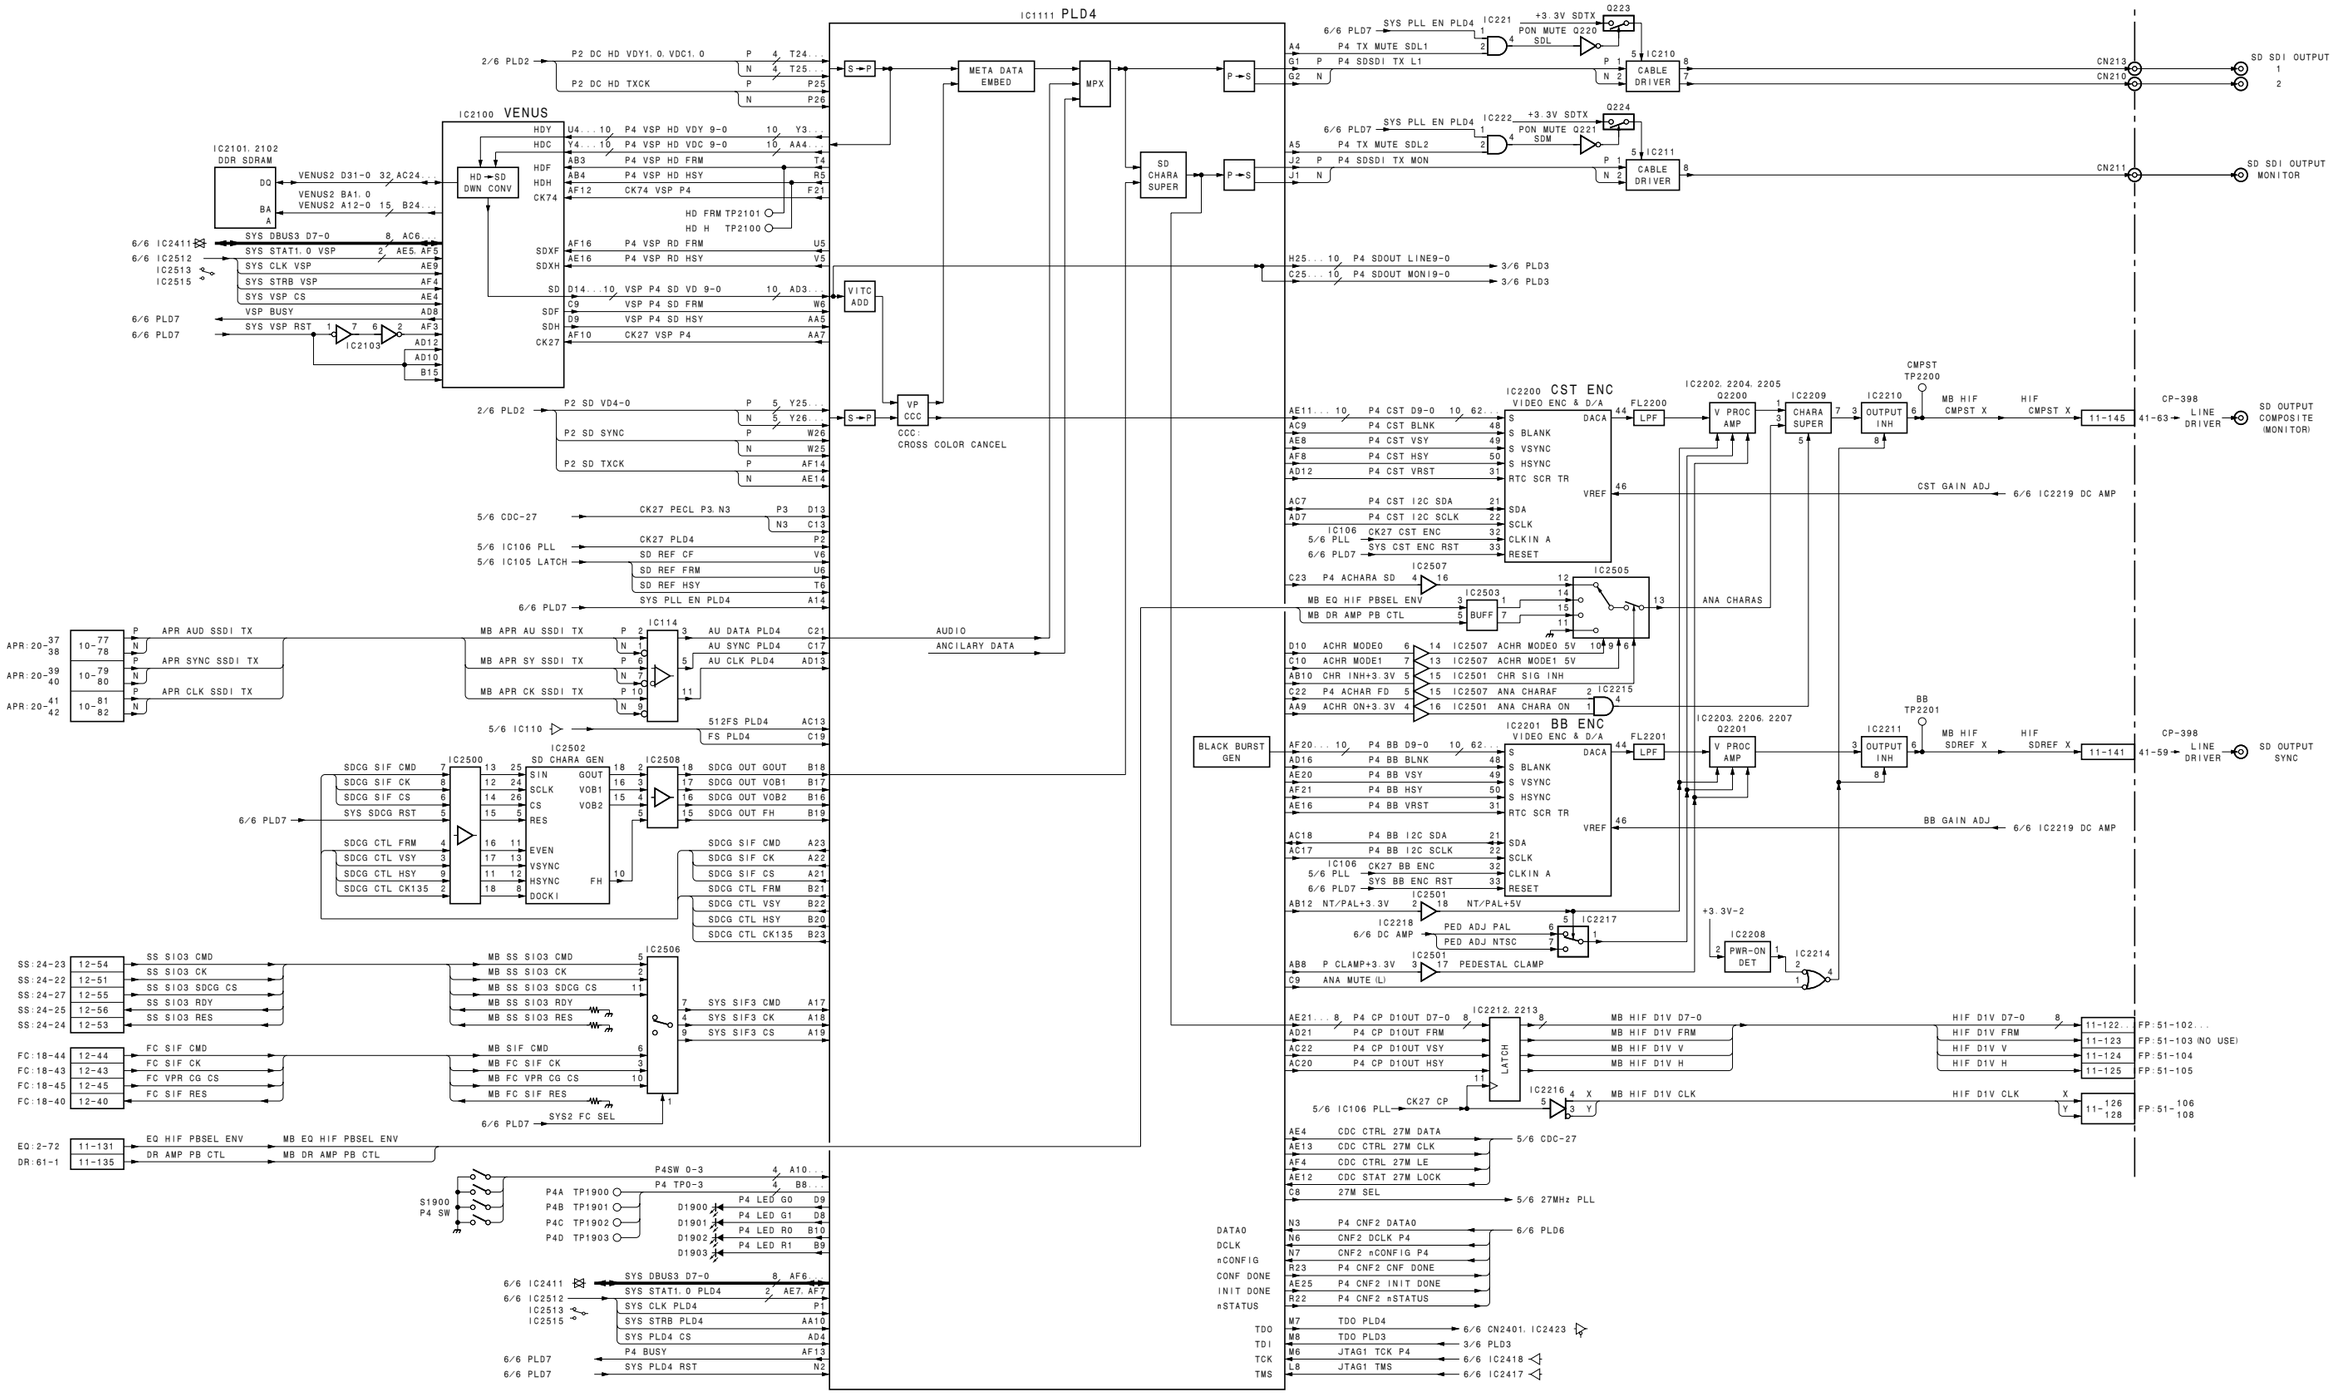

HIF-46 (4/6)
BOARD NO. 1-874-862-12

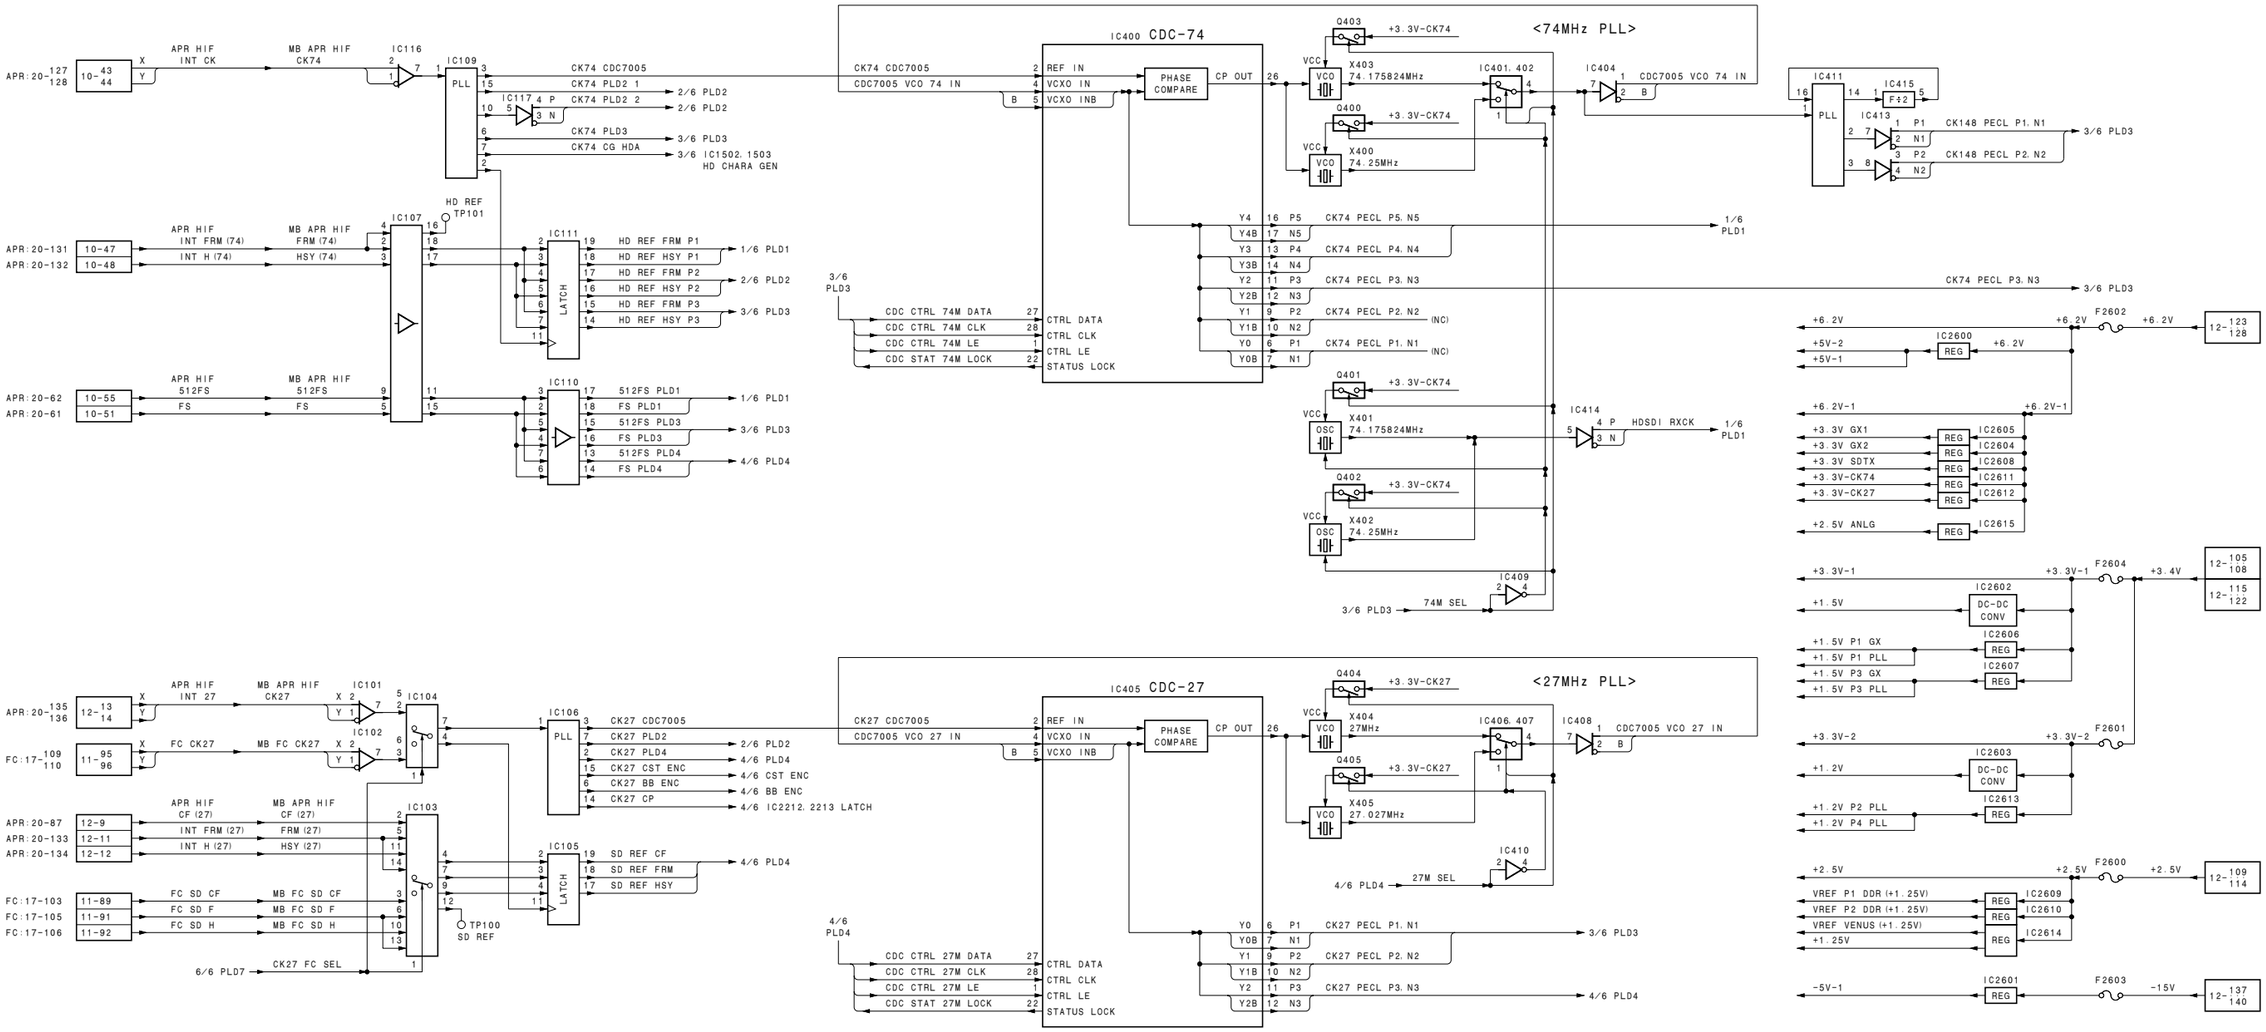

HIF-46 (5/6)
BOARD NO. 1-874-862-12

HIF-46 (6/6)
SUFFIX: -12

HIF-46 (6/6)
SUFFIX: -12

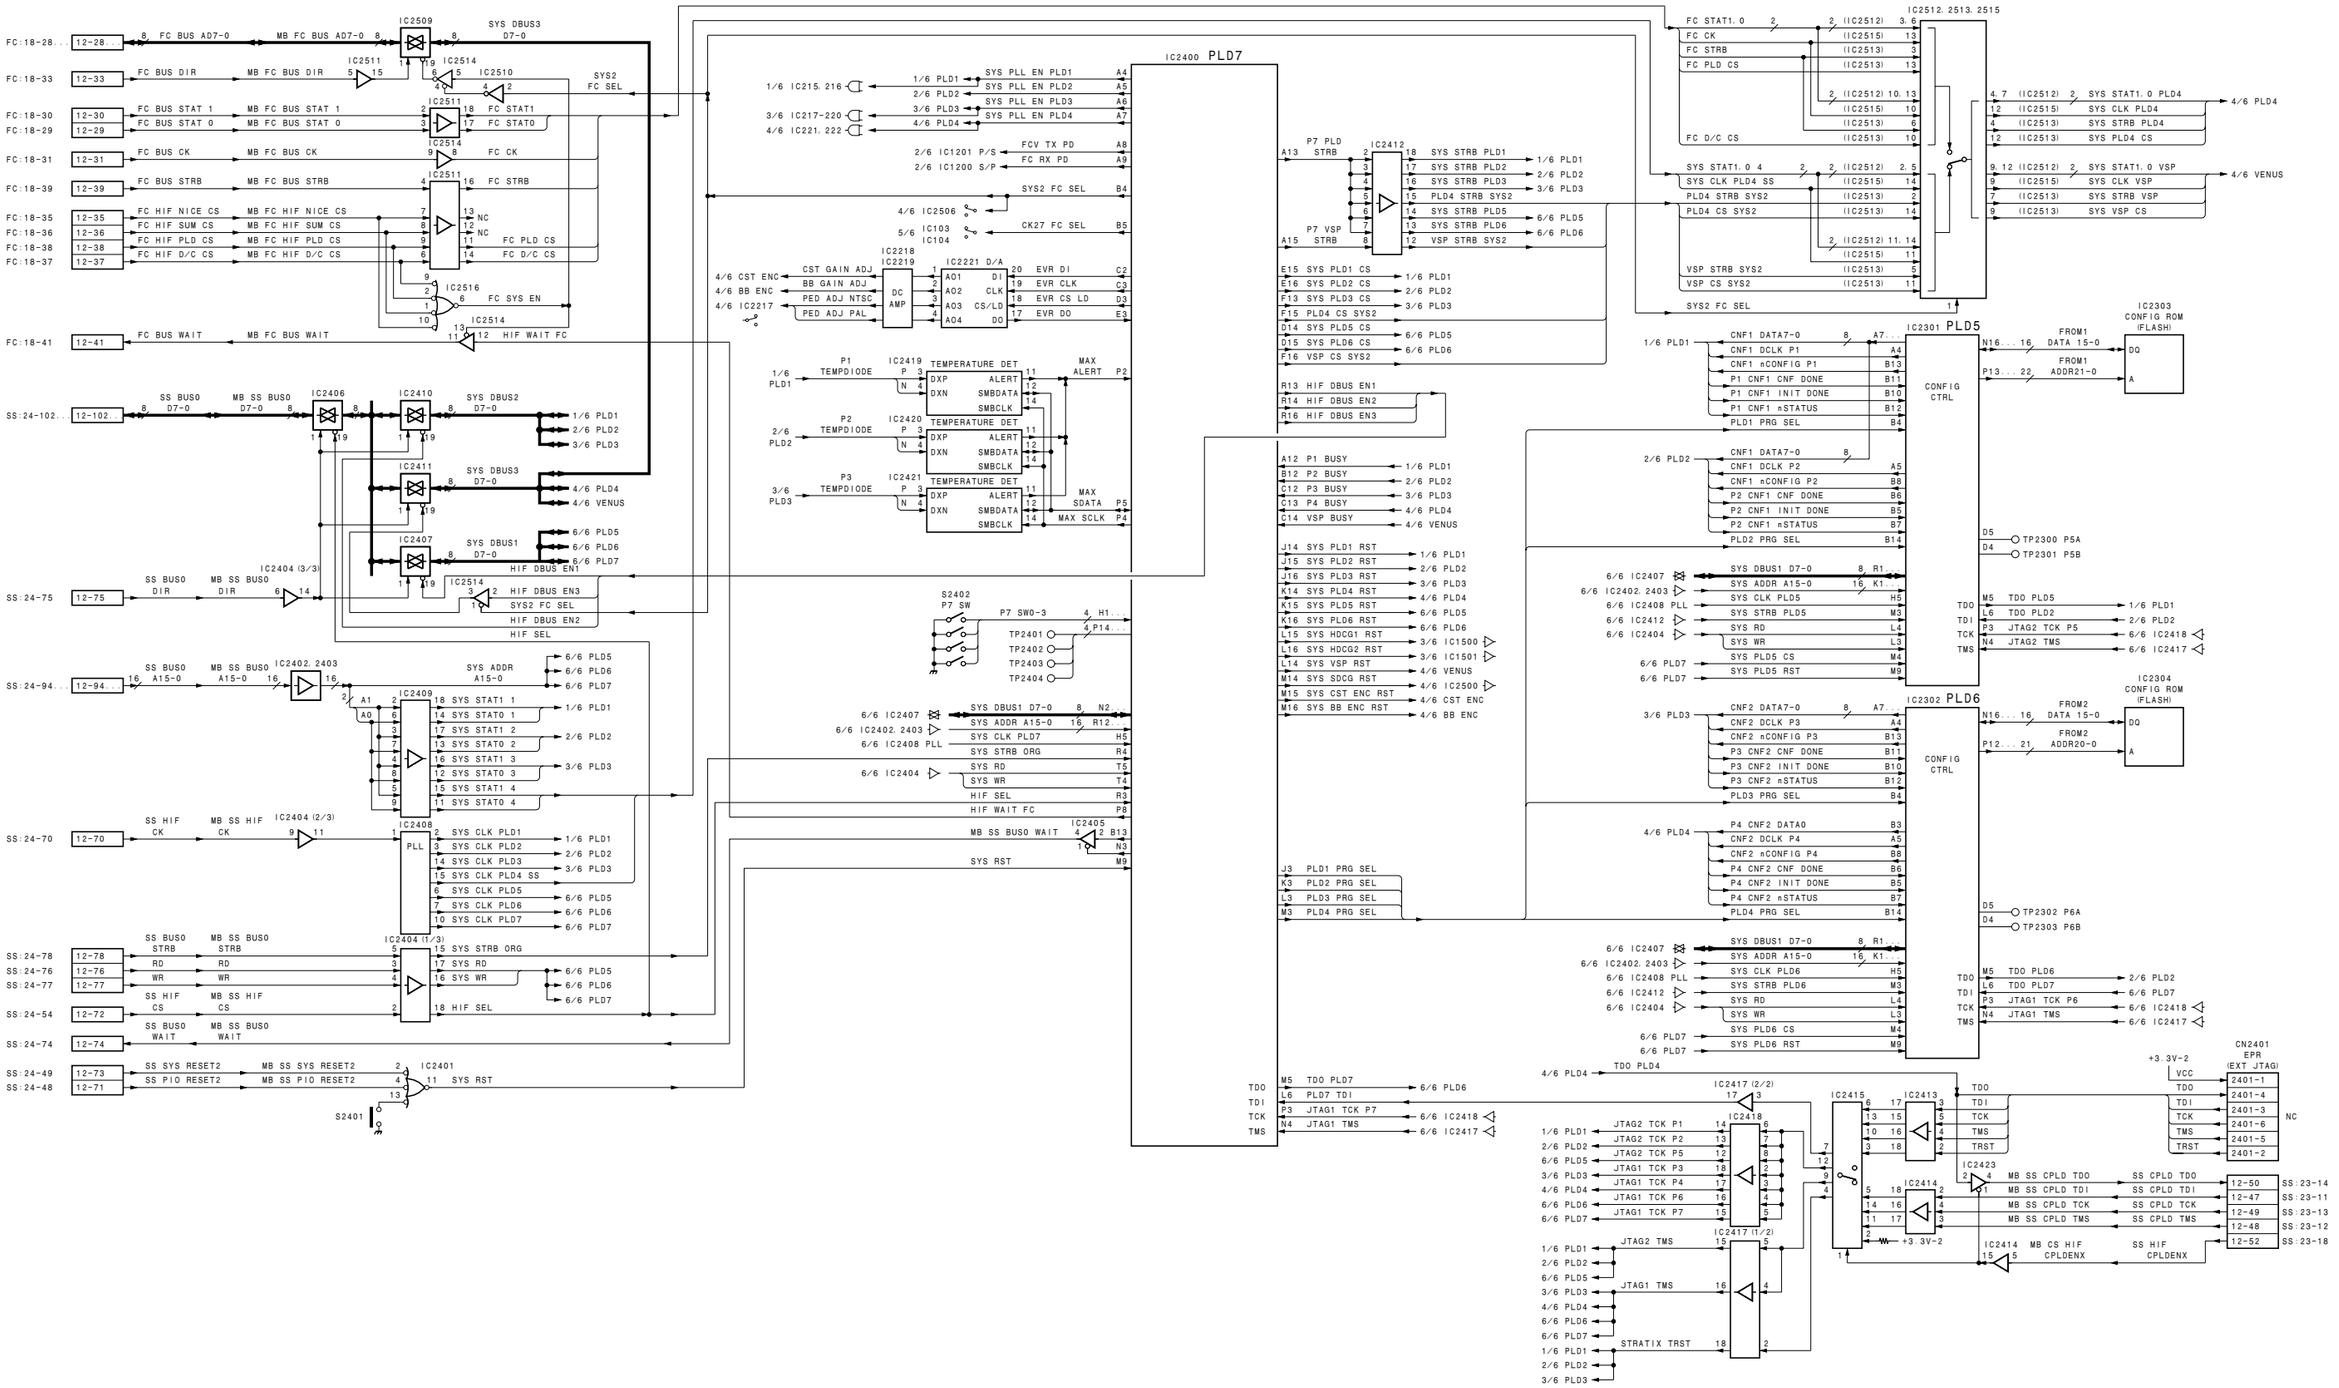

3-56 (a)

HIF-46 (6/6)
BOARD NO. 1-874-862-12

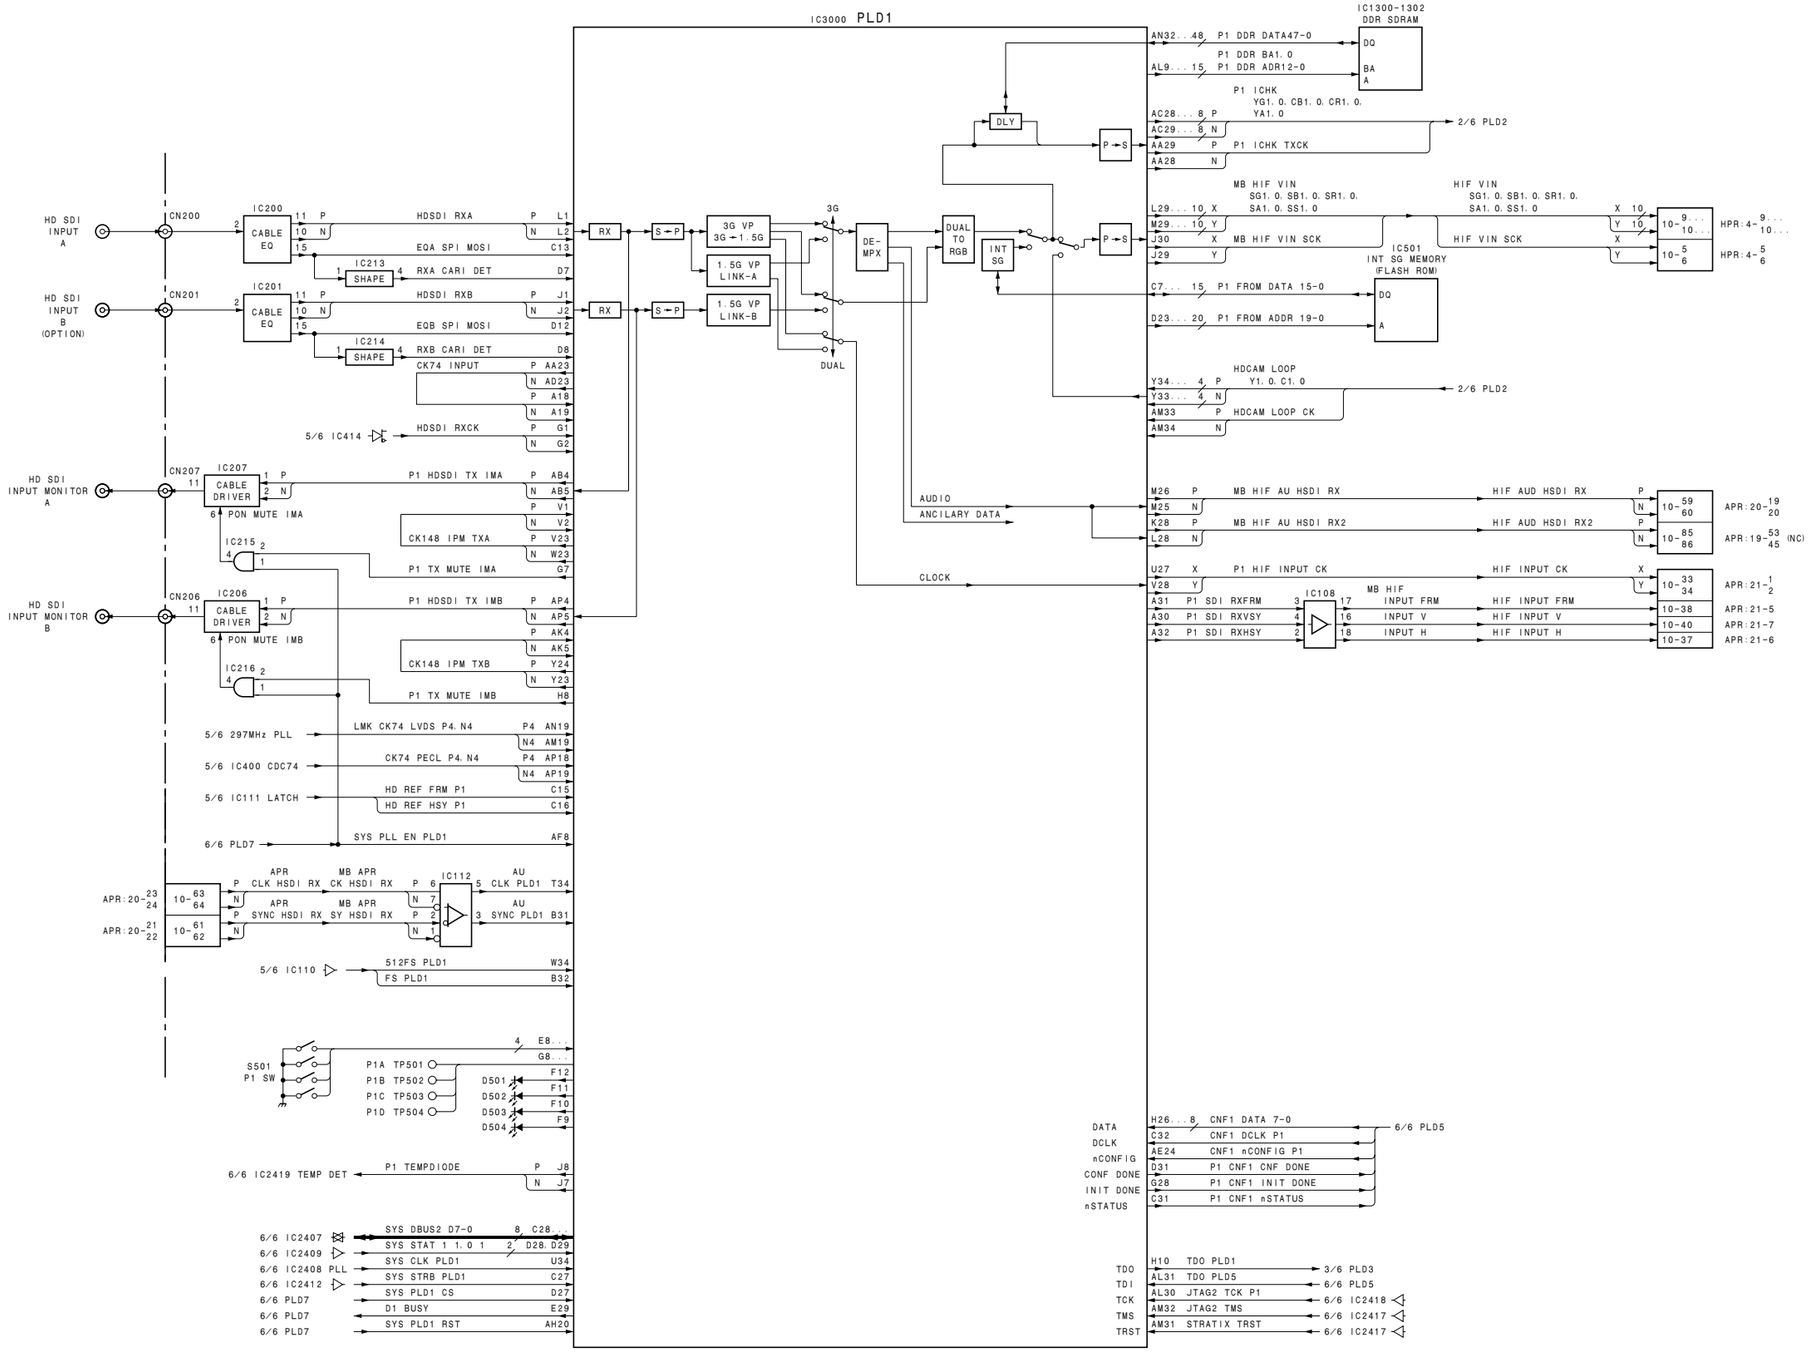
IC3000 PLD1
IC1300-1302 DDR SDRAM
HD SDI INPUT A
HD SDI INPUT B (OPTION)
HD SDI INPUT MONITOR A
HD SDI INPUT MONITOR B
CN200
CN201
CN207
CN206
IC200
IC201
IC207
IC206
CABLE EQ
CABLE DRIVER
SHAPE
RX
S→P
P→S
3G VP 3G→1.5G
1.5G VP LINK-A
1.5G VP LINK-B
DE-MPX
DUAL TO RGB
INT SG
DLY
3G
DUAL
HDSDI RXA
HDSDI RXB
EQA SPI MOSI
EQB SPI MOSI
RXA CARI DET
RXB CARI DET
CK74 INPUT
HDSDI RXCK
P1 HDSDI TX IMA
P1 HDSDI TX IMB
PON MUTE IMA
PON MUTE IMB
CK148 IPM TXA
CK148 IPM TXB
P1 TX MUTE IMA
P1 TX MUTE IMB
AUDIO
ANCILLARY DATA
CLOCK
P1 DDR DATA47-0
P1 DDR BA1.0
P1 DDR ADR12-0
P1 ICHK YG1.0,CB1.0,CR1.0, YA1.0
P1 ICHK TXCK
2/6 PLD2
MB HIF VIN SG1.0,SB1.0,SR1.0, SA1.0,SS1.0
HIF VIN SG1.0,SB1.0,SR1.0, SA1.0,SS1.0
MB HIF VIN SCK
HIF VIN SCK
IC501 INT SG MEMORY (FLASH ROM)
P1 FROM DATA 15-0
P1 FROM ADDR 19-0
HDCAM LOOP Y1.0,C1.0
HDCAM LOOP CK
MB HIF AU HSDI RX
MB HIF AU HSDI RX2
HIF AUD HSDI RX
HIF AUD HSDI RX2
P1 HIF INPUT CK
HIF INPUT CK
MB HIF INPUT FRM
HIF INPUT FRM
HIF INPUT V
HIF INPUT H
IC108
P1 SDI RXFRM
P1 SDI RXVSY
P1 SDI RXHSY
HPR:4-9...10...
HPR:4-5 6
APR:20-19 20
APR:19-53 45 (NC)
APR:21-1 2
APR:21-5
APR:21-7
APR:21-6
5/6 IC414
5/6 297MHz PLL
5/6 IC400 CDC74
5/6 IC111 LATCH
6/6 PLD7
LMK CK74 LVDS P4.N4
CK74 PECL P4.N4
HD REF FRM P1
HD REF HSY P1
SYS PLL EN PLD1
APR CLK HSDI RX
MB APR CK HSDI RX
APR SYNC HSDI RX
MB APR SY HSDI RX
IC112
AU CLK PLD1
AU SYNC PLD1
APR:20-23 24
APR:20-21 22
5/6 IC110
512FS PLD1
FS PLD1
S501 P1 SW
P1A TP501
P1B TP502
P1C TP503
P1D TP504
D501
D502
D503
D504
6/6 IC2419 TEMP DET
P1 TEMPDIODE
6/6 IC2407
6/6 IC2409
6/6 IC2408 PLL
6/6 IC2412
SYS DBUS2 D7-0
SYS STAT 1 1.0 1
SYS CLK PLD1
SYS STRB PLD1
SYS PLD1 CS
D1 BUSY
SYS PLD1 RST
DATA
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
CNF1 DATA 7-0
CNF1 DCLK P1
CNF1 nCONFIG P1
P1 CNF1 CNF DONE
P1 CNF1 INIT DONE
P1 CNF1 nSTATUS
6/6 PLD5
TDO
TDI
TCK
TMS
TRST
TDO PLD1
TDO PLD5
JTAG2 TCK P1
JTAG2 TMS
STRATIX TRST
3/6 PLD3
6/6 PLD5
6/6 IC2418
6/6 IC2417
6/6 IC2417

HIF-56 (1/6)

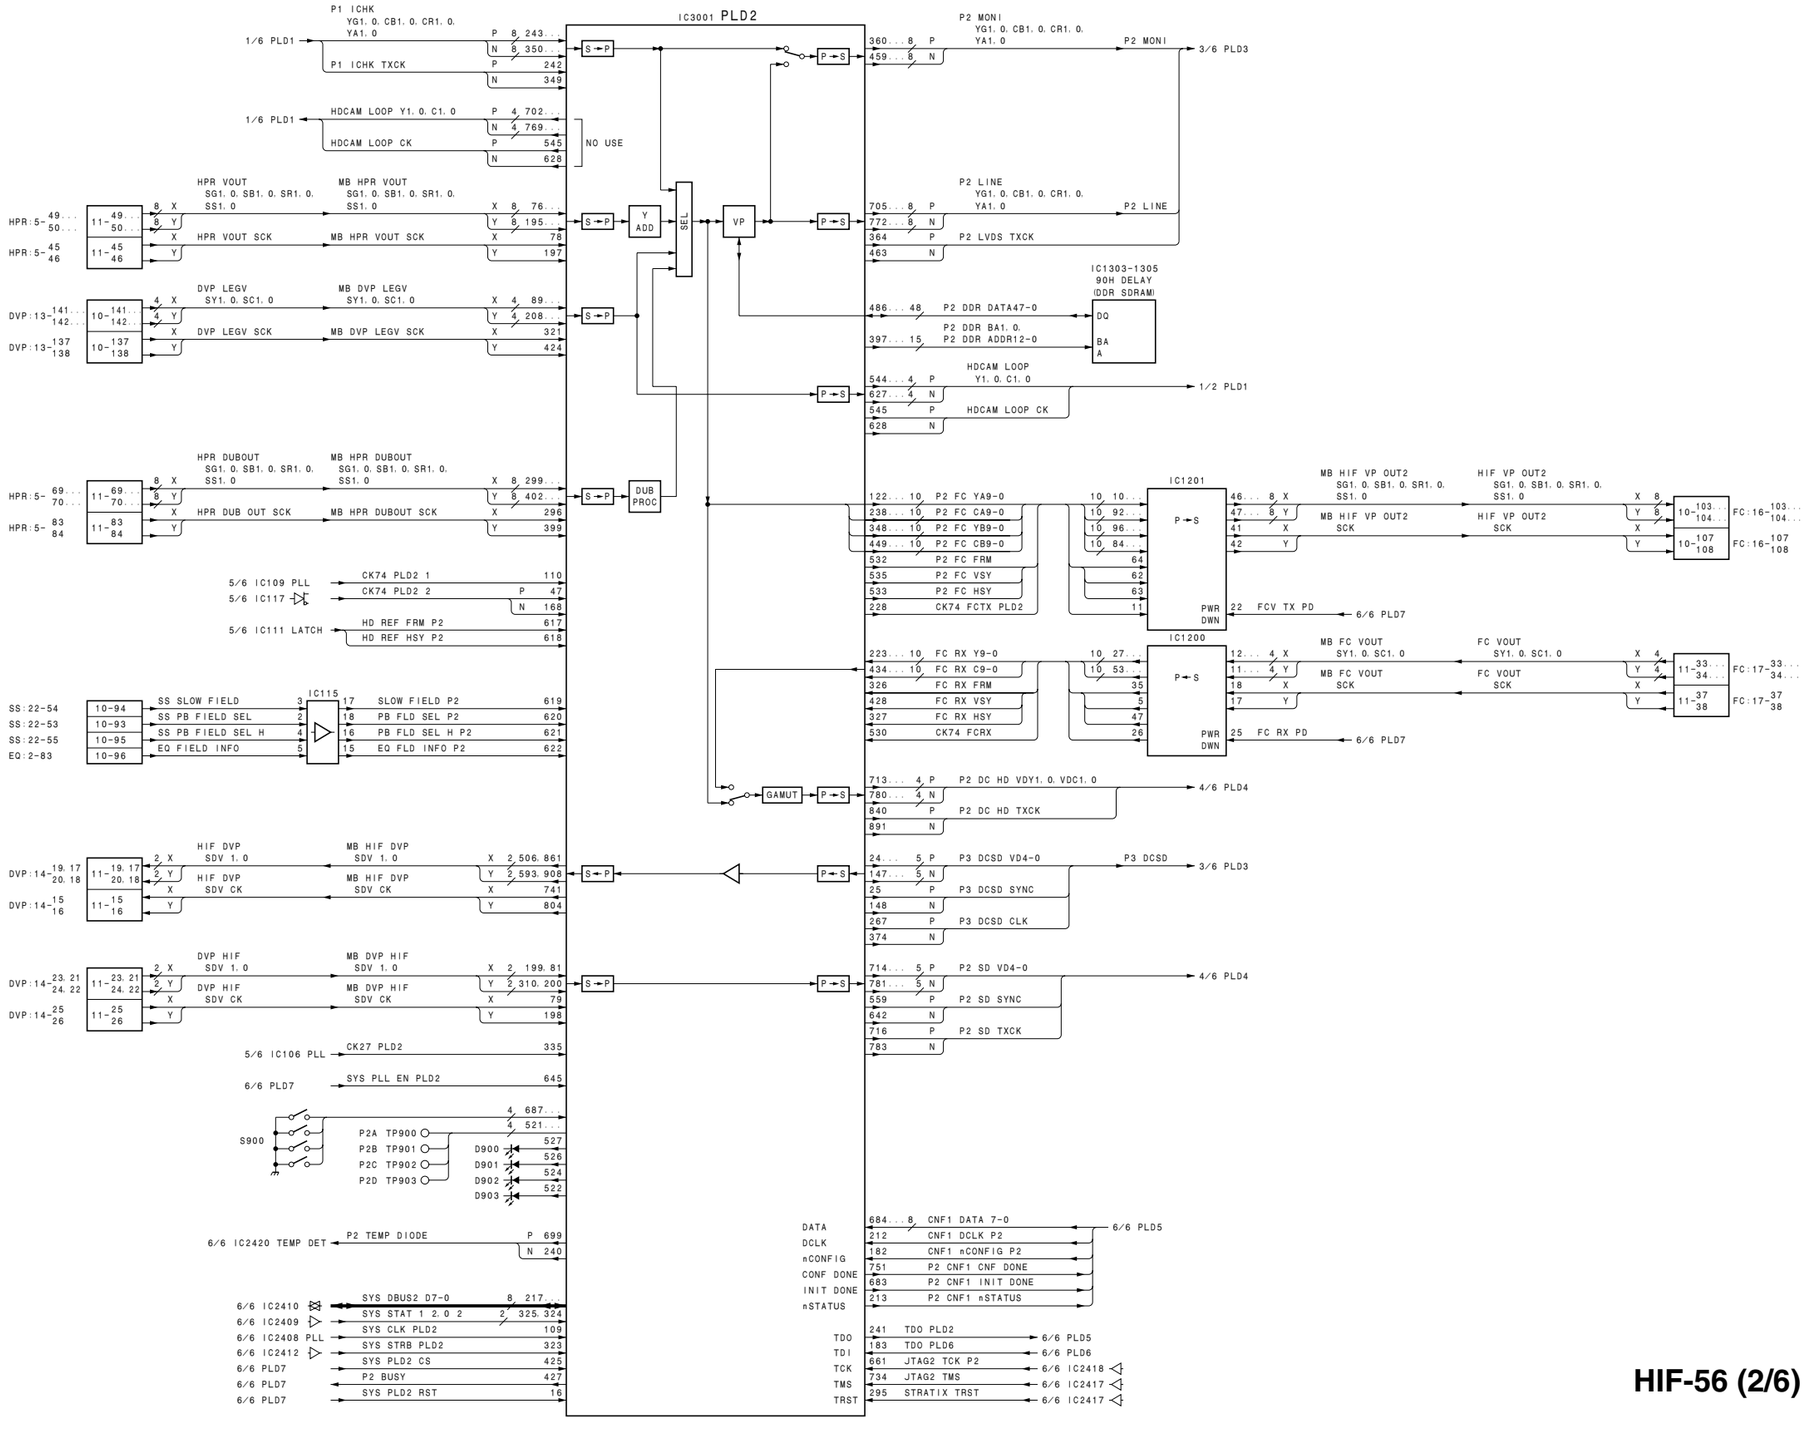
IC3001 PLD2
P1 ICHK
YG1. 0. CB1. 0. CR1. 0.
YA1. 0
1/6 PLD1
P1 ICHK TXCK
HDCAM LOOP Y1. 0. C1. 0
HDCAM LOOP CK
NO USE
HPR VOUT
SG1. 0. SB1. 0. SR1. 0.
SS1. 0
MB HPR VOUT
HPR VOUT SCK
MB HPR VOUT SCK
DVP LEGV
SY1. 0. SC1. 0
MB DVP LEGV
DVP LEGV SCK
MB DVP LEGV SCK
HPR DUBOUT
MB HPR DUBOUT
HPR DUB OUT SCK
MB HPR DUBOUT SCK
5/6 IC109 PLL
5/6 IC117
5/6 IC111 LATCH
CK74 PLD2 1
CK74 PLD2 2
HD REF FRM P2
HD REF HSY P2
IC115
SS SLOW FIELD
SS PB FIELD SEL
SS PB FIELD SEL H
EQ FIELD INFO
SLOW FIELD P2
PB FLD SEL P2
PB FLD SEL H P2
EQ FLD INFO P2
HIF DVP
SDV 1. 0
MB HIF DVP
HIF DVP SCK
MB HIF DVP SCK
DVP HIF
MB DVP HIF
DVP HIF SCK
MB DVP HIF SCK
5/6 IC106 PLL
CK27 PLD2
6/6 PLD7
SYS PLL EN PLD2
S900
P2A TP900
P2B TP901
P2C TP902
P2D TP903
D900
D901
D902
D903
6/6 IC2420 TEMP DET
P2 TEMP DIODE
6/6 IC2410
6/6 IC2409
6/6 IC2408 PLL
6/6 IC2412
SYS DBUS2 D7-0
SYS STAT 1 2. 0 2
SYS CLK PLD2
SYS STRB PLD2
SYS PLD2 CS
P2 BUSY
SYS PLD2 RST
S→P
P→S
Y ADD
SEL
VP
DUB PROC
GAMUT
P2 MONI
YG1. 0. CB1. 0. CR1. 0.
YA1. 0
3/6 PLD3
P2 LINE
P2 LVDS TXCK
IC1303-1305
90H DELAY
IDDR SDRAM
P2 DDR DATA47-0
P2 DDR BA1. 0.
P2 DDR ADDR12-0
DQ
BA
A
HDCAM LOOP
Y1. 0. C1. 0
1/2 PLD1
HDCAM LOOP CK
P2 FC YA9-0
P2 FC CA9-0
P2 FC YB9-0
P2 FC CB9-0
P2 FC FRM
P2 FC VSY
P2 FC HSY
CK74 FCTX PLD2
IC1201
PWR DWN
FCV TX PD
6/6 PLD7
MB HIF VP OUT2
SG1. 0. SB1. 0. SR1. 0.
SS1. 0
HIF VP OUT2
SCK
FC:16-103...104...
FC:16-107 108
FC RX Y9-0
FC RX C9-0
FC RX FRM
FC RX VSY
FC RX HSY
CK74 FCRX
IC1200
FC RX PD
MB FC VOUT
SY1. 0. SC1. 0
FC VOUT
SCK
FC:17-33...34...
FC:17-37 38
P2 DC HD VDY1. 0. VDC1. 0
P2 DC HD TXCK
4/6 PLD4
P3 DCSD VD4-0
P3 DCSD
3/6 PLD3
P3 DCSD SYNC
P3 DCSD CLK
P2 SD VD4-0
P2 SD SYNC
P2 SD TXCK
DATA
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
CNF1 DATA 7-0
CNF1 DCLK P2
CNF1 nCONFIG P2
P2 CNF1 CNF DONE
P2 CNF1 INIT DONE
P2 CNF1 nSTATUS
6/6 PLD5
TDO
TDI
TCK
TMS
TRST
TDO PLD2
TDO PLD6
JTAG2 TCK P2
JTAG2 TMS
STRATIX TRST
6/6 PLD6
6/6 IC2418
6/6 IC2417

HIF-56 (2/6)

HIF-56 (3/6)

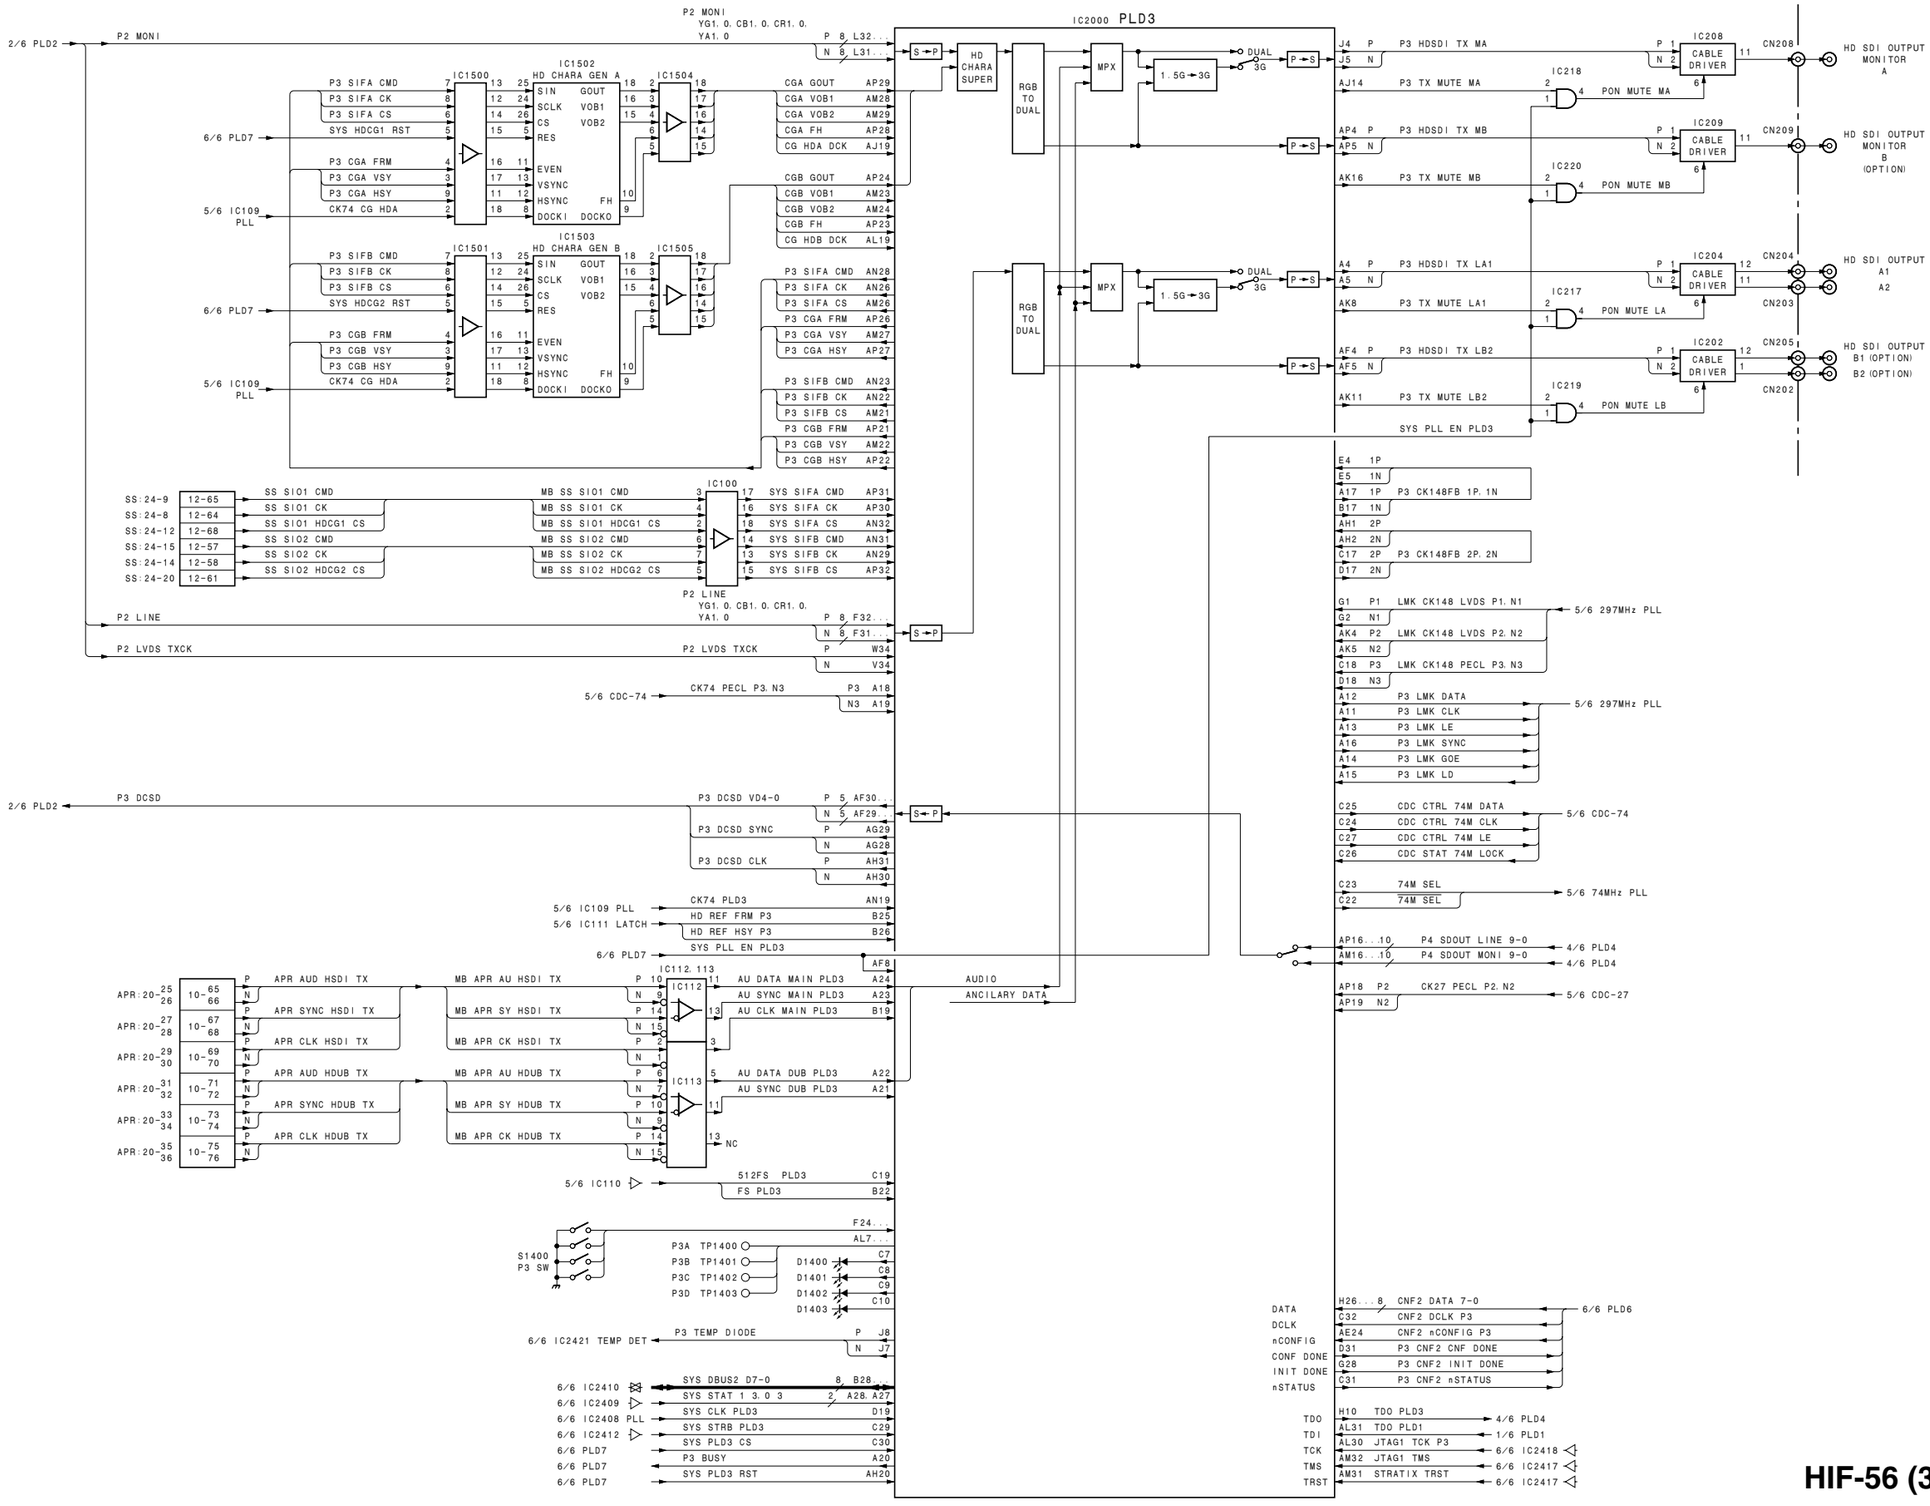

HIF-56 (3/6)

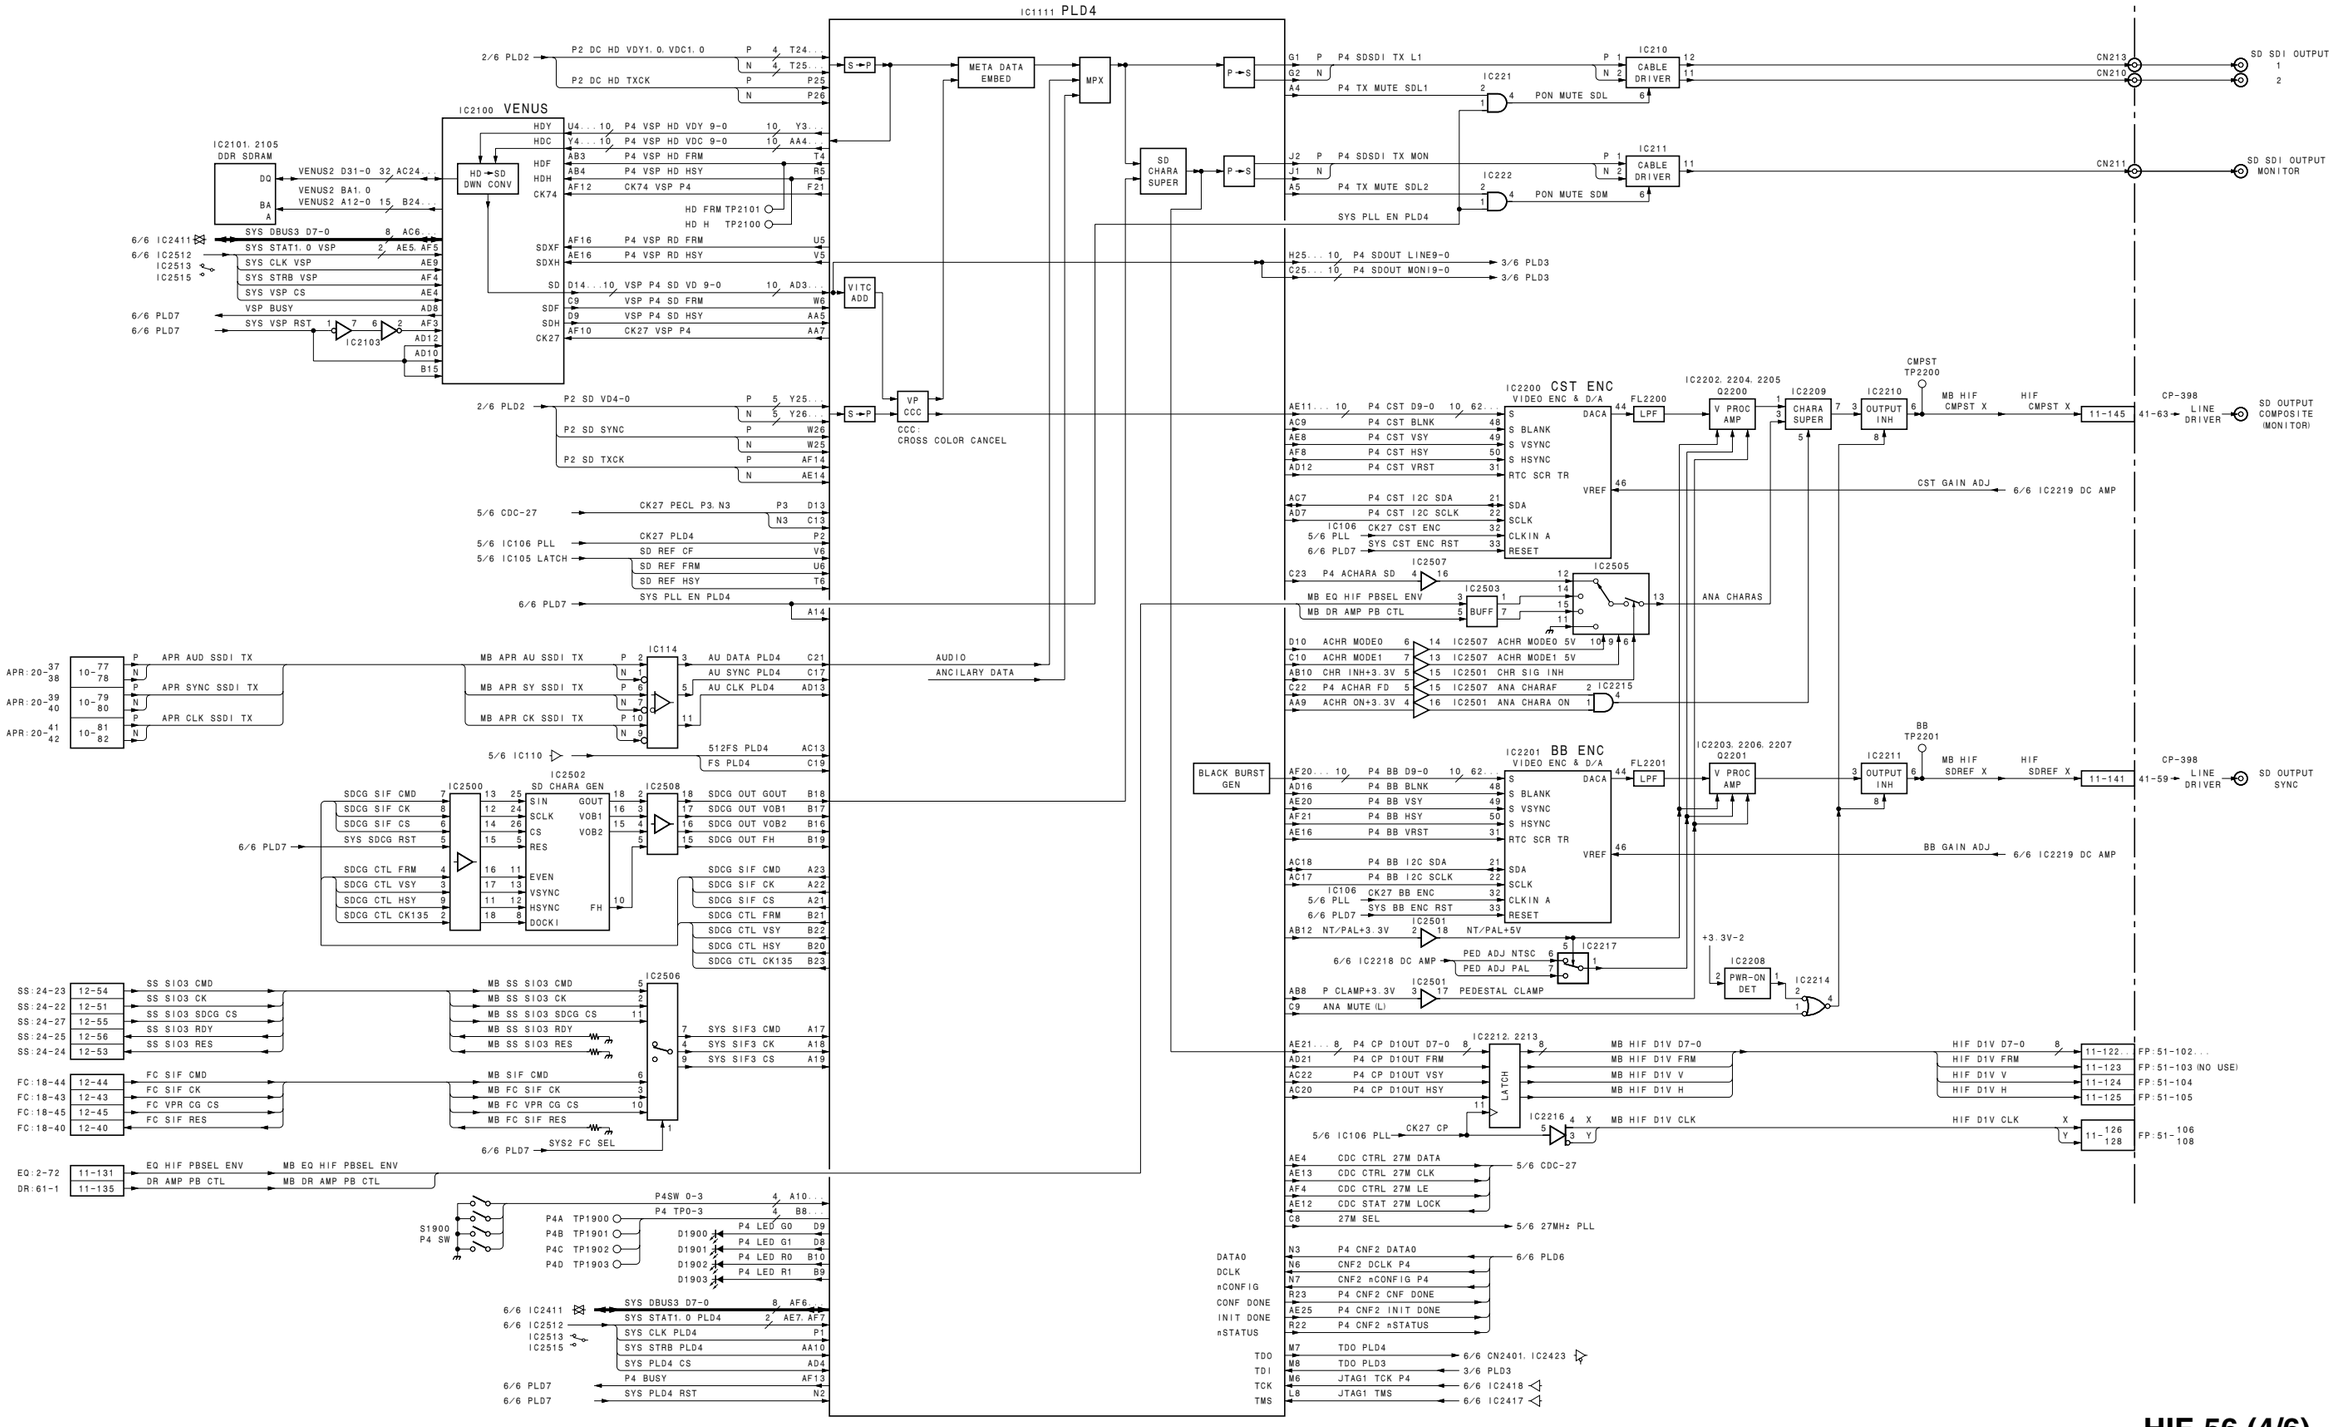
IC1111 PLD4
IC2100 VENUS
IC2101, 2105 DDR SDRAM
HD→SD DWN CONV
META DATA EMBED
MPX
SD CHARA SUPER
VITC ADD
VP CCC
CCC: CROSS COLOR CANCEL
IC2200 CST ENC VIDEO ENC & D/A
IC2201 BB ENC VIDEO ENC & D/A
IC210 CABLE DRIVER
IC211 CABLE DRIVER
IC221 PON MUTE SDL
IC222 PON MUTE SDM
SYS PLL EN PLD4
SD SDI OUTPUT 1 2
SD SDI OUTPUT MONITOR
H25...10 P4 SDOUT LINE9-0
C25...10 P4 SDOUT MONI9-0
3/6 PLD3
FL2200 LPF
FL2201 LPF
Q2200 V PROC AMP
Q2201 V PROC AMP
IC2209 CHARA SUPER
IC2210 OUTPUT INH
IC2211 OUTPUT INH
CMPST TP2200
BB TP2201
MB HIF CMPST X
HIF CMPST X
MB HIF SDREF X
HIF SDREF X
CP-398 LINE DRIVER
SD OUTPUT COMPOSITE (MONITOR)
SD OUTPUT SYNC
CST GAIN ADJ
BB GAIN ADJ
6/6 IC2219 DC AMP
BLACK BURST GEN
IC2202, 2204, 2205
IC2203, 2206, 2207
IC2208 PWR-ON DET
IC2214
IC2215
IC2216
IC2217
PED ADJ NTSC
PED ADJ PAL
6/6 IC2218 DC AMP
+3.3V-2
ANA CHARAS
IC2505
IC2507
IC2503 BUFF
IC2501
IC2502 SD CHARA GEN
IC2506
IC2508
IC114
IC1106 5/6 PLL
IC2412, 2213 LATCH
MB HIF D1V D7-0
MB HIF D1V FRM
MB HIF D1V V
MB HIF D1V H
MB HIF D1V CLK
HIF D1V D7-0
HIF D1V FRM
HIF D1V V
HIF D1V H
HIF D1V CLK
FP:51-102...
FP:51-103 (NO USE)
FP:51-104
FP:51-105
FP:51-106 108
5/6 CDC-27
5/6 27MHz PLL
6/6 PLD6
3/6 PLD3
6/6 CN2401, IC2423
6/6 IC2418
6/6 IC2417
DATA0
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
TDO
TDI
TCK
TMS
S1900 P4 SW
APR AUD SSDI TX
APR SYNC SSDI TX
APR CLK SSDI TX
MB APR AU SSDI TX
MB APR SY SSDI TX
MB APR CK SSDI TX
AUDIO
ANCILLARY DATA
SS SIO3 CMD
SS SIO3 CK
SS SIO3 SDCG CS
SS SIO3 RDY
SS SIO3 RES
FC SIF CMD
FC SIF CK
FC VPR CG CS
FC SIF RES
EQ HIF PBSEL ENV
DR AMP PB CTL
SYS2 FC SEL

HIF-56 (5/6)

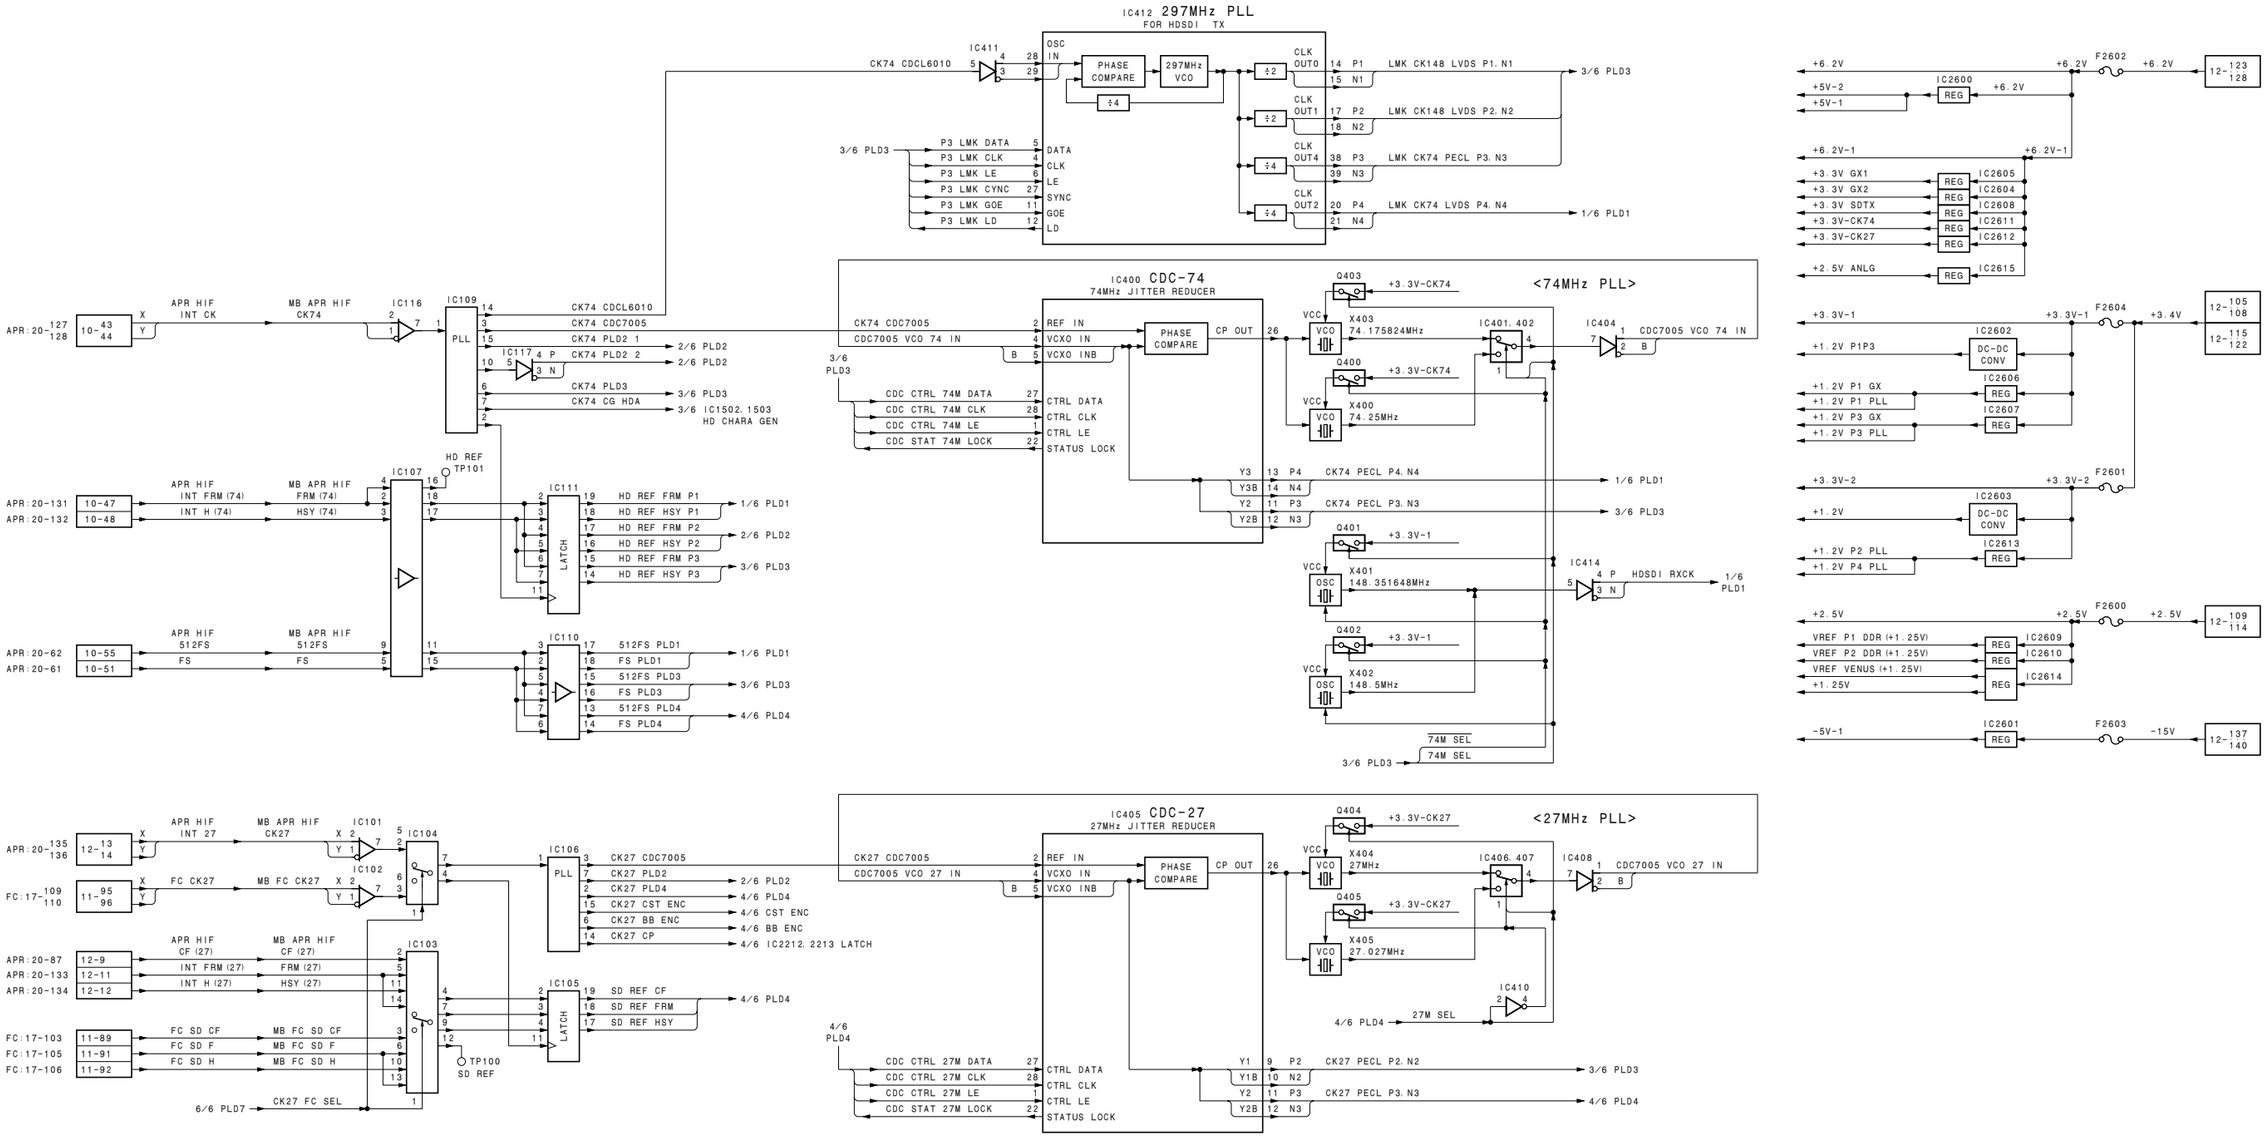

HIF-56 (5/6)

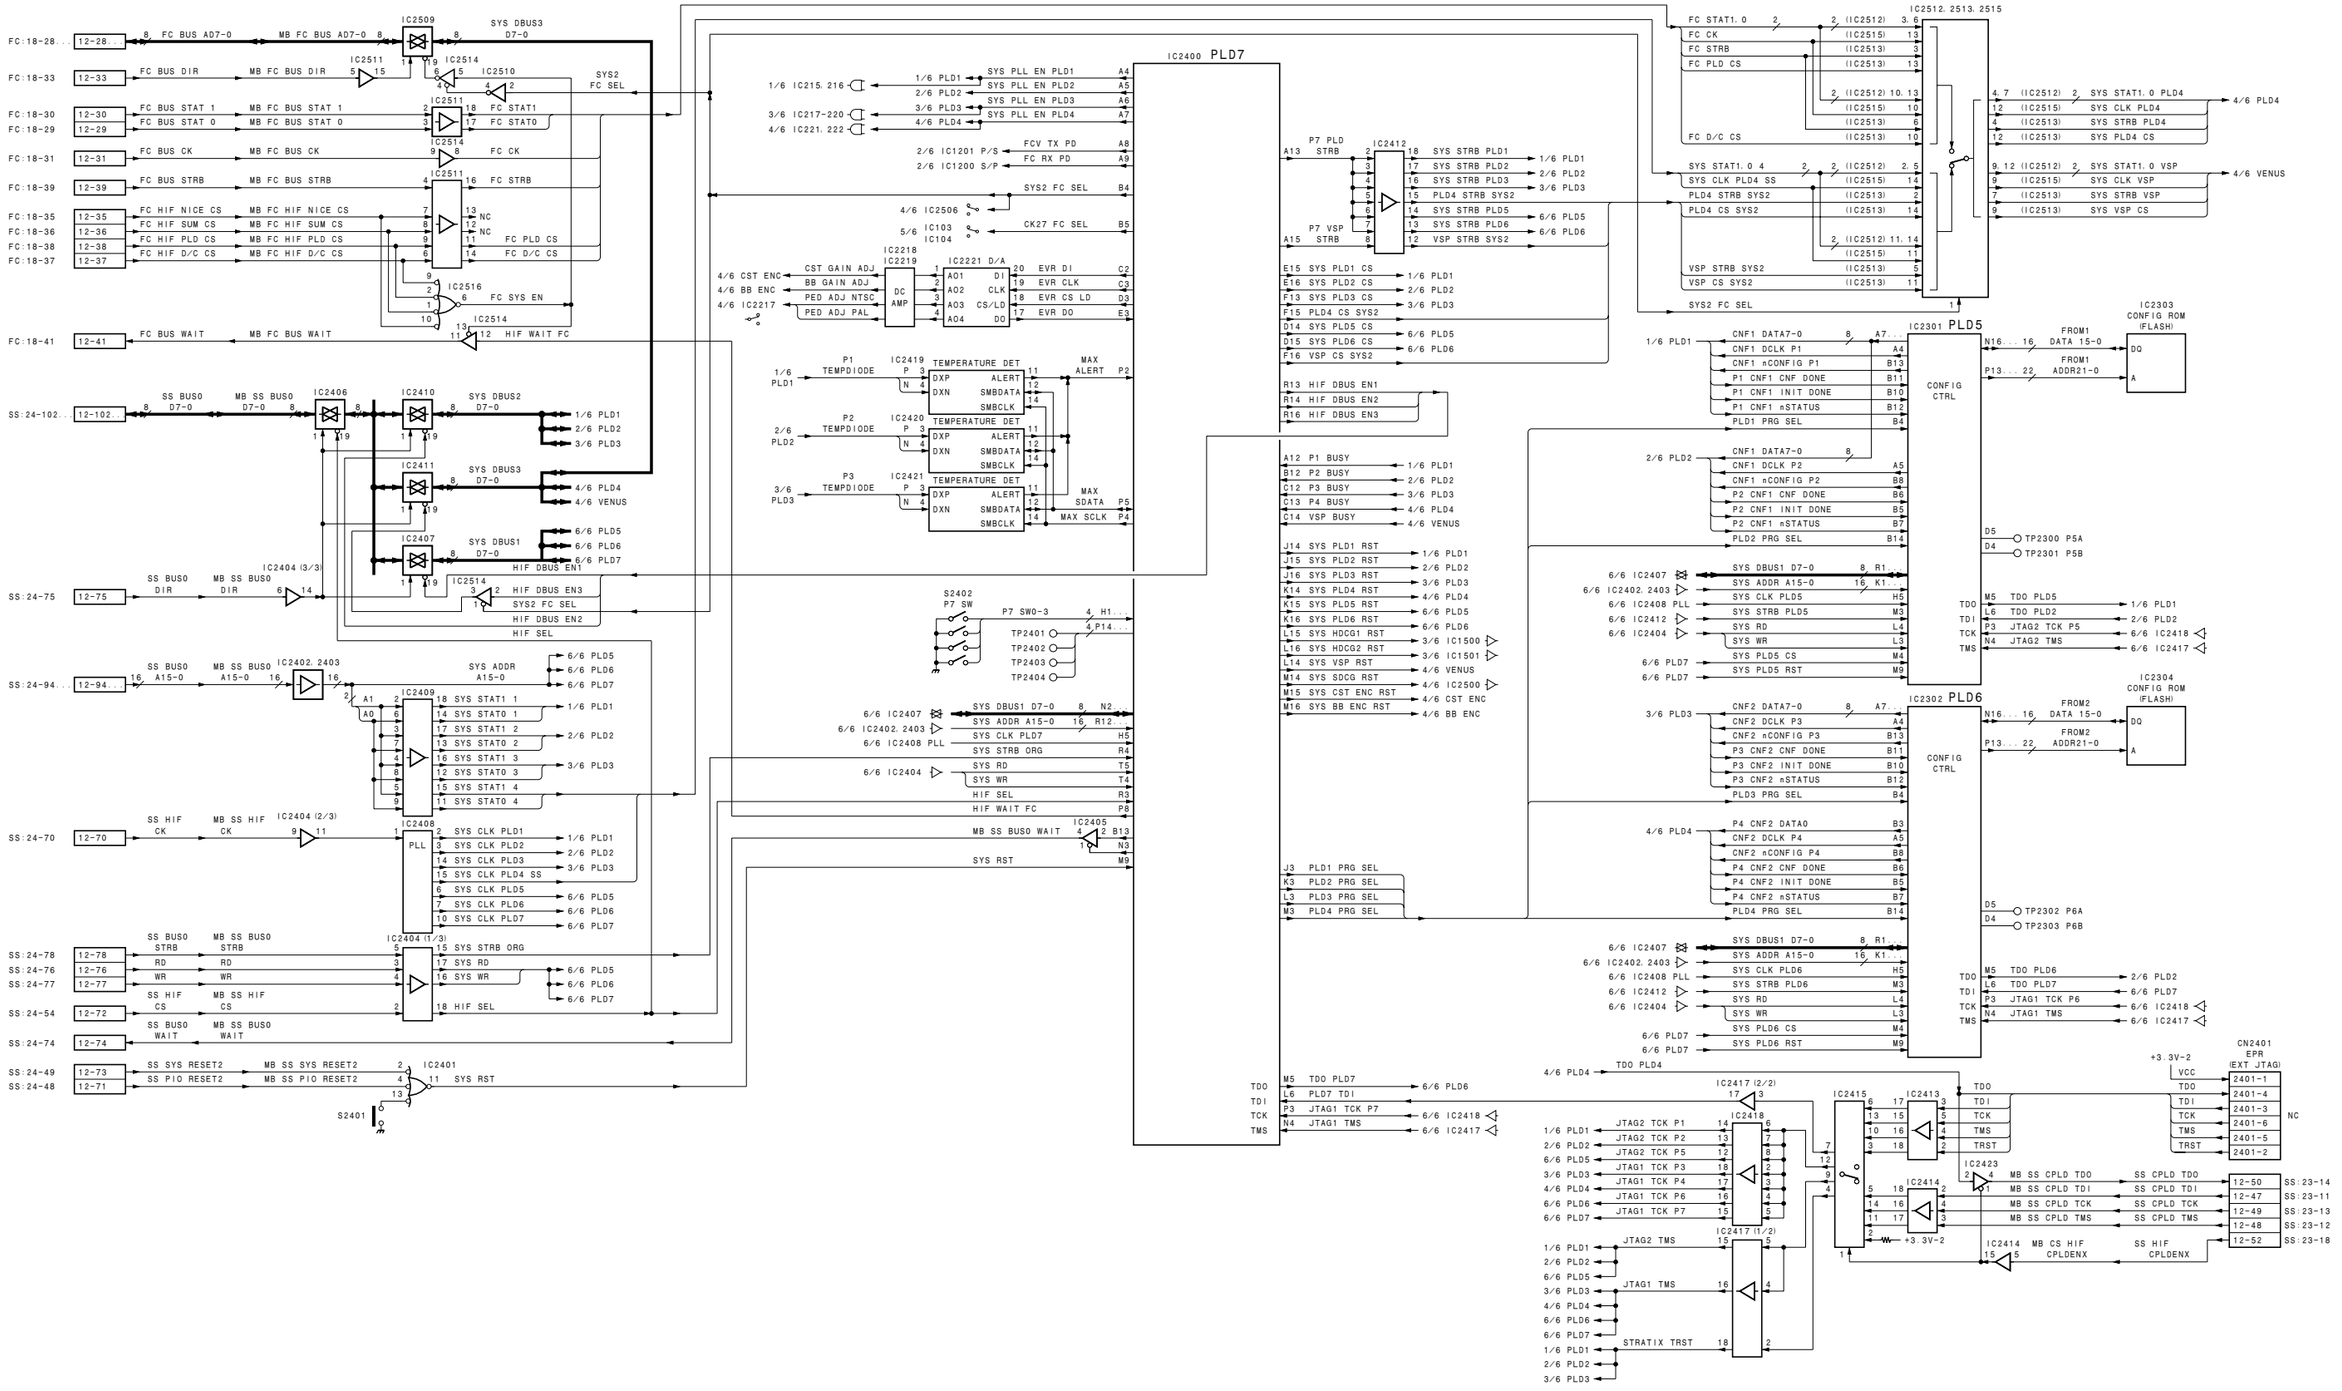
IC2400 PLD7
IC2509
IC2511
IC2514
IC2510
IC2516
IC2506
IC2218
IC2219
IC2221 D/A
IC2419
IC2420
IC2421
IC2402. 2403
IC2409
IC2408
IC2404 (2/3)
IC2404 (1/3)
IC2405
IC2401
IC2406
IC2410
IC2411
IC2407
IC2404 (3/3)
IC2412
IC2512. 2513. 2515
IC2301 PLD5
IC2302 PLD6
IC2303 CONFIG ROM (FLASH)
IC2304 CONFIG ROM (FLASH)
CONFIG CTRL
S2402 P7 SW
S2401
CN2401 EPR (EXT JTAG)
IC2417 (2/2)
IC2418
IC2417 (1/2)
IC2415
IC2413
IC2423
IC2414
SYS2 FC SEL
SYS PLL EN PLD1
SYS PLL EN PLD2
SYS PLL EN PLD3
SYS PLL EN PLD4
FCV TX PD
FC RX PD
CK27 FC SEL
CST GAIN ADJ
BB GAIN ADJ
PED ADJ NTSC
PED ADJ PAL
EVR DI
EVR CLK
EVR CS LD
EVR DO
TEMPERATURE DET
MAX ALERT
MAX SCLK
MAX SDATA
P7 PLD STRB
P7 VSP STRB
SYS STRB PLD1
SYS STRB PLD2
SYS STRB PLD3
PLD4 STRB SYS2
SYS STRB PLD5
SYS STRB PLD6
VSP STRB SYS2
HIF DBUS EN1
HIF DBUS EN2
HIF DBUS EN3
P1 BUSY
P2 BUSY
P3 BUSY
P4 BUSY
VSP BUSY
SYS PLD1 RST
SYS PLD2 RST
SYS PLD3 RST
SYS PLD4 RST
SYS PLD5 RST
SYS PLD6 RST
SYS HDCG1 RST
SYS HDCG2 RST
SYS VSP RST
SYS SDCG RST
SYS CST ENC RST
SYS BB ENC RST
PLD1 PRG SEL
PLD2 PRG SEL
PLD3 PRG SEL
PLD4 PRG SEL
TDO PLD4
TDO PLD7
PLD7 TDI
JTAG1 TCK P7
JTAG1 TMS
JTAG2 TCK P1
JTAG2 TCK P2
JTAG2 TCK P5
JTAG1 TCK P3
JTAG1 TCK P4
JTAG1 TCK P6
JTAG1 TCK P7
JTAG2 TMS
JTAG1 TMS
STRATIX TRST
SYS DBUS1 D7-0
SYS ADDR A15-0
SYS CLK PLD5
SYS STRB PLD5
SYS RD
SYS WR
SYS PLD5 CS
SYS PLD5 RST
SYS CLK PLD6
SYS STRB PLD6
SYS PLD6 CS
SYS PLD6 RST
CNF1 DATA7-0
CNF1 DCLK P1
CNF1 nCONFIG P1
P1 CNF1 CNF DONE
P1 CNF1 INIT DONE
P1 CNF1 nSTATUS
PLD1 PRG SEL
CNF2 DATA7-0
CNF2 DCLK P2
CNF2 nCONFIG P2
P2 CNF1 CNF DONE
P2 CNF1 INIT DONE
P2 CNF1 nSTATUS
PLD2 PRG SEL
CNF2 DCLK P3
CNF2 nCONFIG P3
P3 CNF2 CNF DONE
P3 CNF2 INIT DONE
P3 CNF2 nSTATUS
PLD3 PRG SEL
P4 CNF2 DATA0
CNF2 DCLK P4
CNF2 nCONFIG P4
P4 CNF2 CNF DONE
P4 CNF2 INIT DONE
P4 CNF2 nSTATUS
PLD4 PRG SEL
FC STAT1. 0
FC CK
FC STRB
FC PLD CS
FC D/C CS
SYS STAT1. 0 4
SYS CLK PLD4 SS
PLD4 STRB SYS2
PLD4 CS SYS2
VSP STRB SYS2
VSP CS SYS2
SYS STAT1. 0 PLD4
SYS CLK PLD4
SYS STRB PLD4
SYS PLD4 CS
SYS STAT1. 0 VSP
SYS CLK VSP
SYS STRB VSP
SYS VSP CS
FROM1 DATA 15-0
FROM1 ADDR21-0
FROM2 DATA 15-0
FROM2 ADDR21-0
TP2300 P5A
TP2301 P5B
TP2302 P6A
TP2303 P6B
TDO PLD5
TDO PLD6
TDO PLD7
JTAG2 TCK P5
JTAG2 TCK P6
JTAG1 TMS
MB SS CPLD TDO
MB SS CPLD TDI
MB SS CPLD TCK
MB SS CPLD TMS
SS CPLD TDO
SS CPLD TDI
SS CPLD TCK
SS CPLD TMS
MB CS HIF CPLDENX
SS HIF CPLDENX
+3.3V-2
FC:18-28...
FC:18-33
FC:18-30
FC:18-29
FC:18-31
FC:18-39
FC:18-35
FC:18-36
FC:18-38
FC:18-37
FC:18-41
SS:24-102...
SS:24-75
SS:24-94...
SS:24-70
SS:24-78
SS:24-76
SS:24-77
SS:24-54
SS:24-74
SS:24-49
SS:24-48
FC BUS AD7-0
MB FC BUS AD7-0
SYS DBUS3 D7-0
FC BUS DIR
MB FC BUS DIR
FC BUS STAT 1
MB FC BUS STAT 1
FC BUS STAT 0
MB FC BUS STAT 0
FC BUS CK
MB FC BUS CK
FC BUS STRB
MB FC BUS STRB
FC HIF NICE CS
MB FC HIF NICE CS
FC HIF SUM CS
MB FC HIF SUM CS
FC HIF PLD CS
MB FC HIF PLD CS
FC HIF D/C CS
MB FC HIF D/C CS
SYS2 FC SEL
FC STAT1
FC STAT0
FC CK
FC STRB
NC
FC PLD CS
FC D/C CS
SYS FC EN
FC BUS WAIT
MB FC BUS WAIT
HIF WAIT FC
SS BUS0 D7-0
MB SS BUS0 D7-0
SYS DBUS2 D7-0
SYS DBUS1 D7-0
HIF DBUS EN1
SS BUS0 DIR
MB SS BUS0 DIR
HIF DBUS EN3
SYS2 FC SEL
HIF DBUS EN2
HIF SEL
SS BUS0 A15-0
MB SS BUS0 A15-0
SYS ADDR A15-0
SYS STAT1 1
SYS STAT0 1
SYS STAT1 2
SYS STAT0 2
SYS STAT1 3
SYS STAT0 3
SYS STAT1 4
SYS STAT0 4
SS HIF CK
MB SS HIF CK
SYS CLK PLD1
SYS CLK PLD2
SYS CLK PLD3
SYS CLK PLD4 SS
SYS CLK PLD5
SYS CLK PLD6
SYS CLK PLD7
SS BUS0 STRB
MB SS BUS0 STRB
RD
WR
SYS STRB ORG
SYS RD
SYS WR
SS HIF CS
MB SS HIF CS
HIF SEL
SS BUS0 WAIT
MB SS BUS0 WAIT
SS SYS RESET2
MB SS SYS RESET2
SS PIO RESET2
MB SS PIO RESET2
SYS RST
MB SS BUS0 WAIT
HIF WAIT FC
12-28
12-33
12-30
12-29
12-31
12-39
12-35
12-36
12-38
12-37
12-41
12-102
12-75
12-94
12-70
12-78
12-76
12-77
12-72
12-74
12-73
12-71

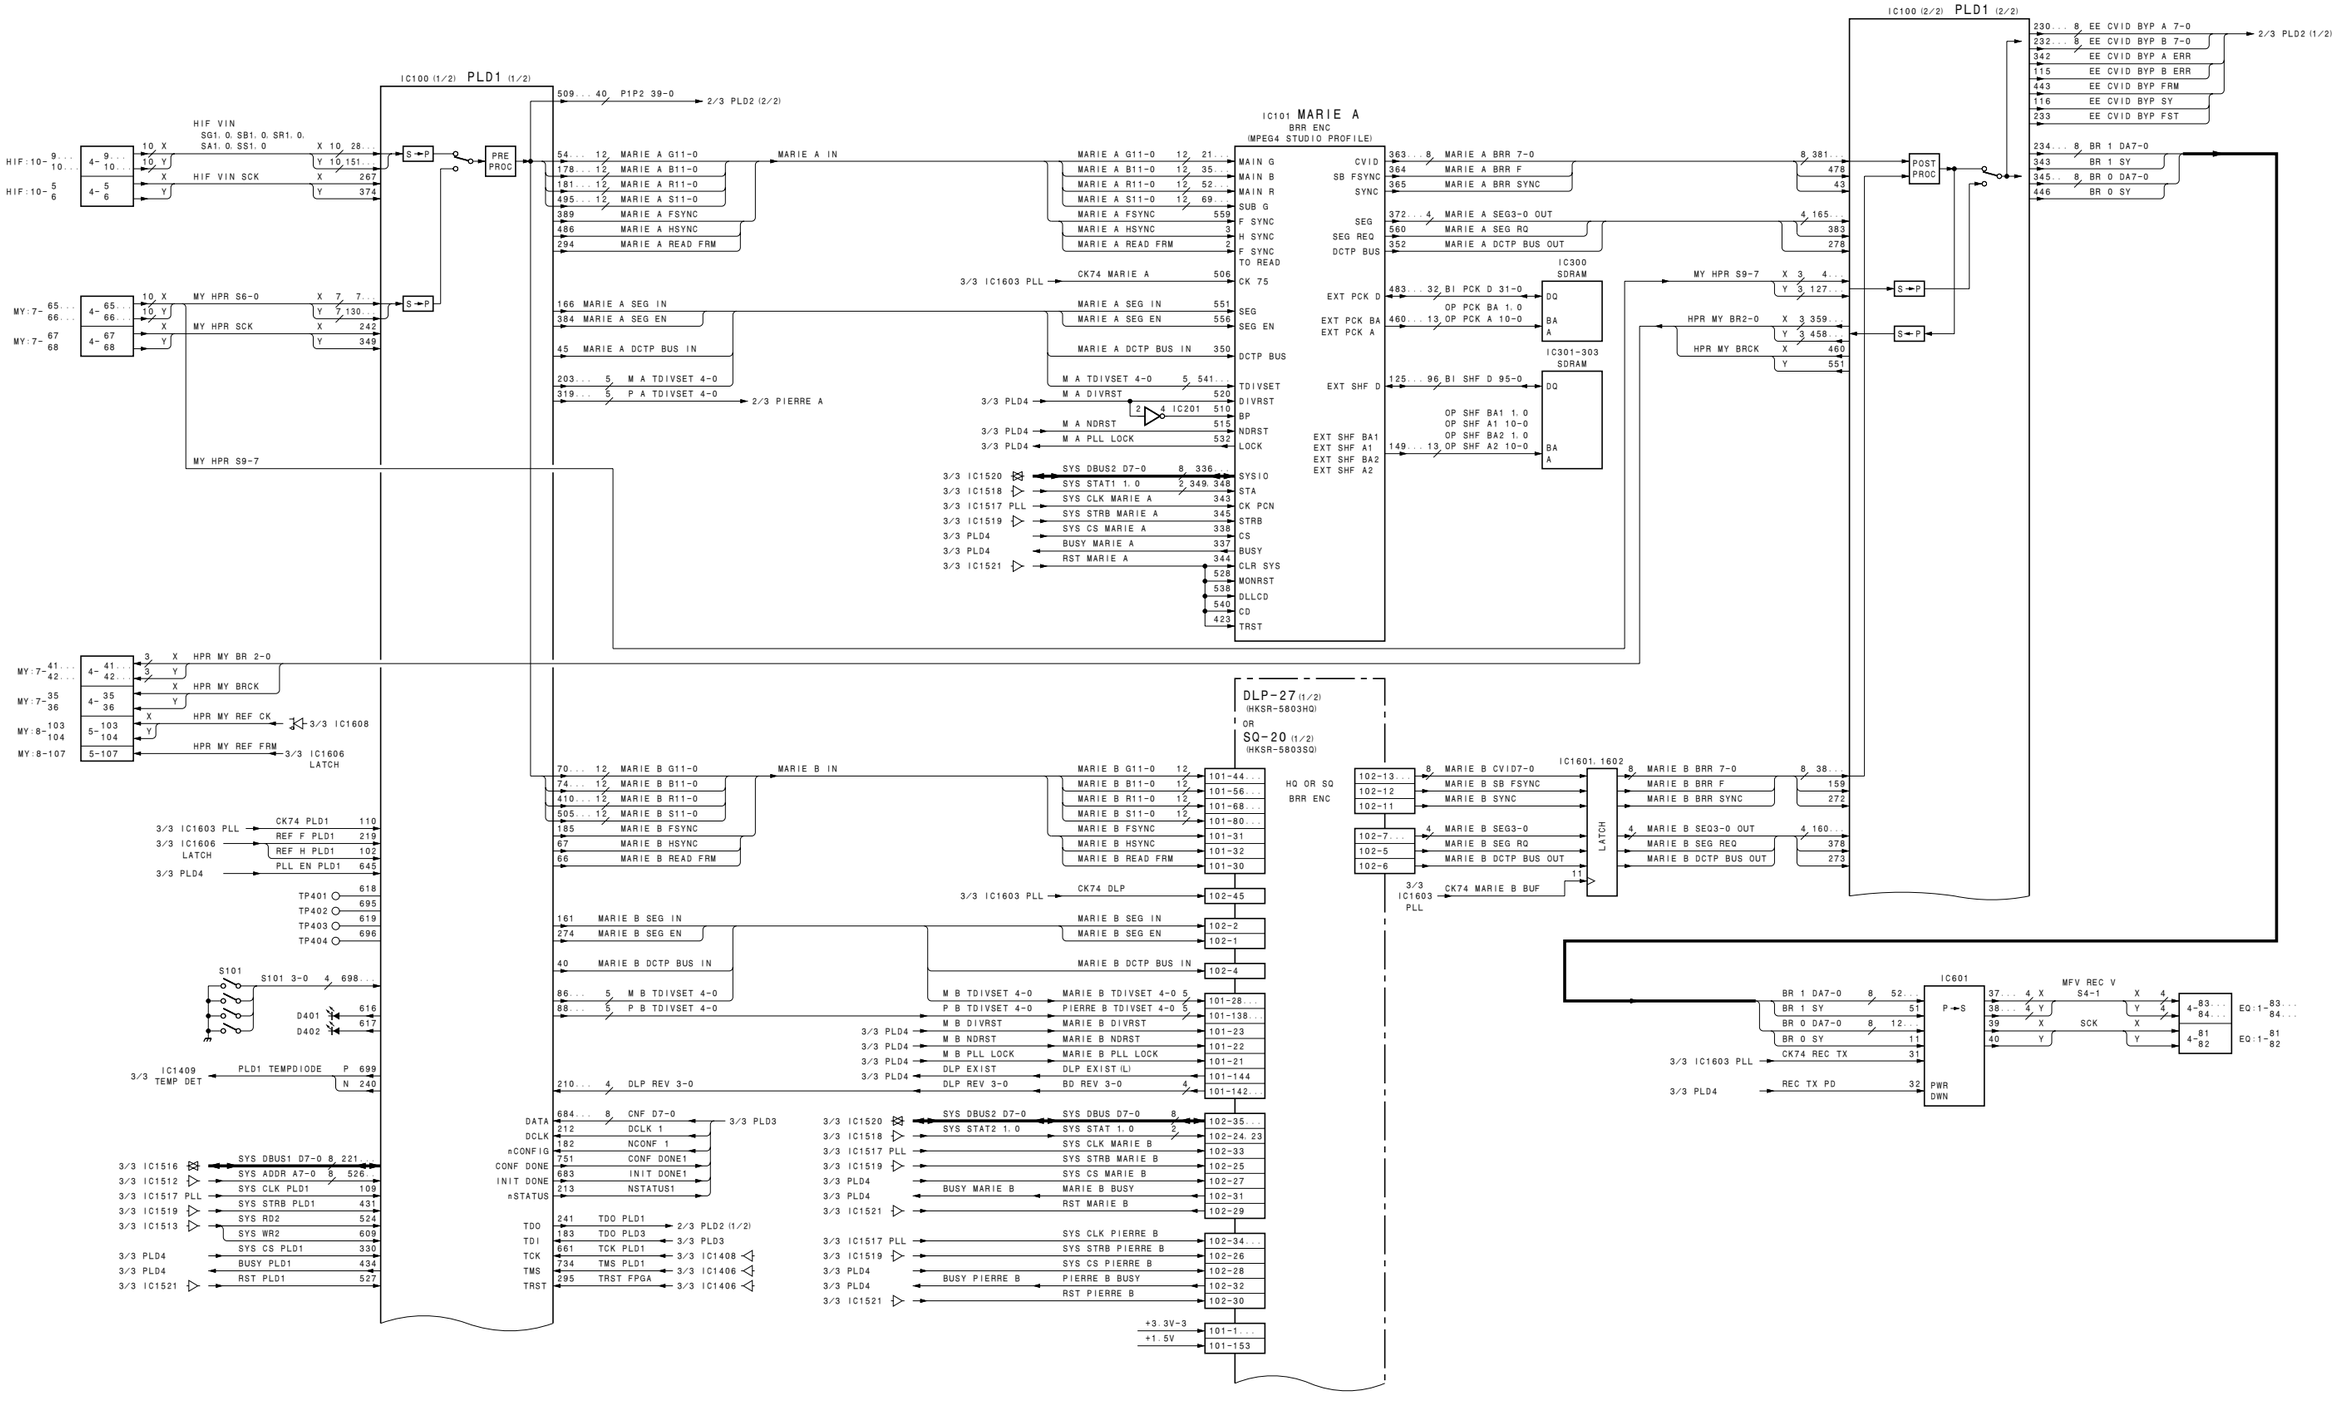
IC100 (1/2) PLD1 (1/2)
IC100 (2/2) PLD1 (2/2)
IC101 MARIE A
BRR ENC
(MPEG4 STUDIO PROFILE)
HIF VIN
SG1. 0, SB1. 0, SR1. 0,
SA1. 0, SS1. 0
HIF VIN SCK
PRE PROC
POST PROC
S→P
MY HPR S6-0
MY HPR SCK
MY HPR S9-7
HPR MY BR 2-0
HPR MY BRCK
HPR MY REF CK
HPR MY REF FRM
3/3 IC1608
3/3 IC1606 LATCH
MARIE A IN
MARIE A SEG IN
MARIE A SEG EN
MARIE A DCTP BUS IN
M A TDIVSET 4-0
P A TDIVSET 4-0
2/3 PIERRE A
MARIE A G11-0
MARIE A B11-0
MARIE A R11-0
MARIE A S11-0
MARIE A FSYNC
MARIE A HSYNC
MARIE A READ FRM
P1P2 39-0
2/3 PLD2 (2/2)
MAIN G
MAIN B
MAIN R
SUB G
F SYNC
H SYNC
F SYNC
TO READ
CK 75
SEG
SEG EN
DCTP BUS
TDIVSET
DIVRST
BP
NDRST
LOCK
SYSIO
STA
CK PCN
STRB
CS
BUSY
CLR SYS
MONRST
DLLCD
CD
TRST
3/3 IC1603 PLL
CK74 MARIE A
M A DIVRST
M A NDRST
M A PLL LOCK
IC201
3/3 PLD4
3/3 IC1520
3/3 IC1518
3/3 IC1517 PLL
3/3 IC1519
3/3 PLD4
3/3 IC1521
SYS DBUS2 D7-0
SYS STAT1 1. 0
SYS CLK MARIE A
SYS STRB MARIE A
SYS CS MARIE A
BUSY MARIE A
RST MARIE A
CVID
SB FSYNC
SYNC
SEG
SEG REQ
DCTP BUS
MARIE A BRR 7-0
MARIE A BRR F
MARIE A BRR SYNC
MARIE A SEG3-0 OUT
MARIE A SEG RQ
MARIE A DCTP BUS OUT
IC300 SDRAM
EXT PCK D
EXT PCK BA
EXT PCK A
BI PCK D 31-0
OP PCK BA 1. 0
OP PCK A 10-0
DQ
BA
A
IC301-303 SDRAM
EXT SHF D
EXT SHF BA1
EXT SHF A1
EXT SHF BA2
EXT SHF A2
BI SHF D 95-0
OP SHF BA1 1. 0
OP SHF A1 10-0
OP SHF BA2 1. 0
OP SHF A2 10-0
EE CVID BYP A 7-0
EE CVID BYP B 7-0
EE CVID BYP A ERR
EE CVID BYP B ERR
EE CVID BYP FRM
EE CVID BYP SY
EE CVID BYP FST
2/3 PLD2 (1/2)
BR 1 DA7-0
BR 1 SY
BR 0 DA7-0
BR 0 SY
DLP-27 (1/2)
(HKSR-5803HQ)
OR
SQ-20 (1/2)
(HKSR-5803SQ)
HQ OR SQ
BRR ENC
MARIE B IN
MARIE B G11-0
MARIE B B11-0
MARIE B R11-0
MARIE B S11-0
MARIE B FSYNC
MARIE B HSYNC
MARIE B READ FRM
MARIE B SEG IN
MARIE B SEG EN
MARIE B DCTP BUS IN
M B TDIVSET 4-0
P B TDIVSET 4-0
M B DIVRST
M B NDRST
M B PLL LOCK
DLP EXIST
DLP REV 3-0
DLP EXIST(L)
BD REV 3-0
PIERRE B TDIVSET 4-0
MARIE B DIVRST
MARIE B NDRST
MARIE B PLL LOCK
DLP REV 3-0
CK74 DLP
CK74 MARIE B BUF
MARIE B CVID7-0
MARIE B SB FSYNC
MARIE B SYNC
MARIE B SEG3-0
MARIE B SEG RQ
MARIE B DCTP BUS OUT
MARIE B BRR 7-0
MARIE B BRR F
MARIE B BRR SYNC
MARIE B SEG3-0 OUT
MARIE B SEG REQ
MARIE B DCTP BUS OUT
IC1601, 1602
LATCH
IC601
MFV REC V
S4-1
SCK
BR 1 DA7-0
BR 1 SY
BR 0 DA7-0
BR 0 SY
CK74 REC TX
REC TX PD
PWR DWN
EQ:1-83...84...
EQ:1-81 82
S101
S101 3-0
D401
D402
IC1409 TEMP DET
PLD1 TEMPDIODE
TP401
TP402
TP403
TP404
CK74 PLD1
REF F PLD1
REF H PLD1
PLL EN PLD1
SYS DBUS1 D7-0
SYS ADDR A7-0
SYS CLK PLD1
SYS STRB PLD1
SYS RD2
SYS WR2
SYS CS PLD1
BUSY PLD1
RST PLD1
DATA
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
CNF D7-0
DCLK 1
NCONF 1
CONF DONE1
INIT DONE1
NSTATUS1
3/3 PLD3
TDO
TDI
TCK
TMS
TRST
TDO PLD1
TDO PLD3
TCK PLD1
TMS PLD1
TRST FPGA
2/3 PLD2 (1/2)
3/3 IC1408
3/3 IC1406
+3.3V-3
+1.5V

HPR-22 (1/3)

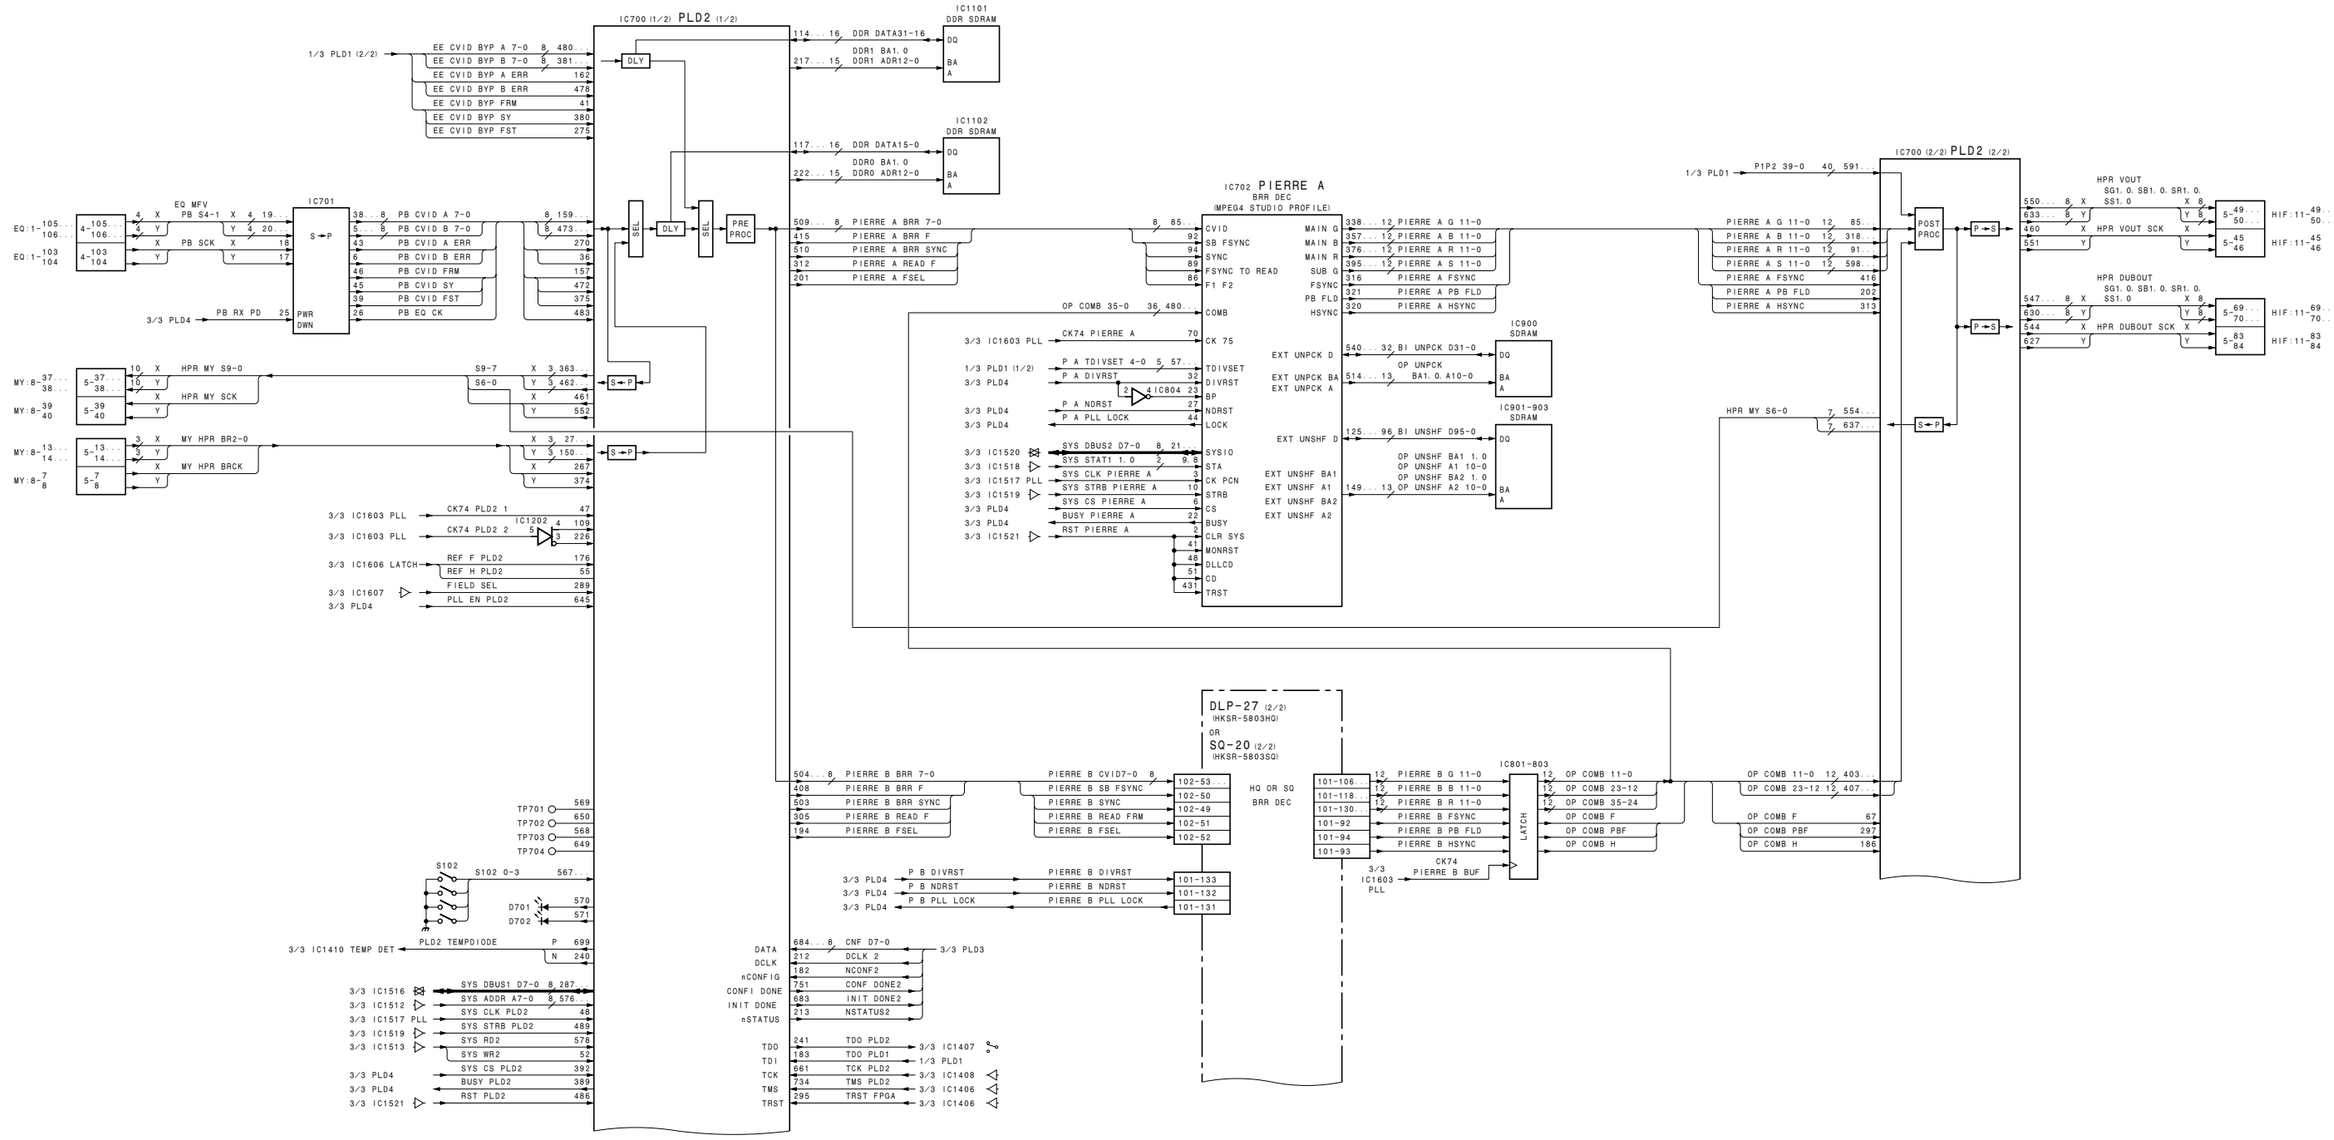
IC700 (1/2) PLD2 (1/2)
IC700 (2/2) PLD2 (2/2)
IC702 PIERRE A
BRR DEC
IMPEG4 STUDIO PROFILE
IC1101
DDR SDRAM
IC1102
DDR SDRAM
IC900
SDRAM
IC901-903
SDRAM
IC701
IC1202
IC801-803
LATCH
DLY
SEL
PRE PROC
POST PROC
DLP-27 (2/2)
(HKSR-5803HQ)
OR
SQ-20 (2/2)
(HKSR-5803SQ)
HQ OR SQ
BRR DEC
HPR VOUT
SG1. 0. SB1. 0. SR1. 0.
HPR VOUT SCK
HPR DUBOUT
SG1. 0. SB1. 0. SR1. 0.
HPR DUBOUT SCK
EQ MFV
PB S4-1
PB SCK
HPR MY S9-0
HPR MY SCK
MY HPR BR2-0
MY HPR BRCK
PB RX PD
PB EQ CK
OP COMB 35-0
OP UNPCK
OP UNSHF BA1 1. 0
OP UNSHF A1 10-0
OP UNSHF BA2 1. 0
OP UNSHF A2 10-0
DDR DATA31-16
DDR1 BA1. 0
DDR1 ADR12-0
DDR DATA15-0
DDRO BA1. 0
DDRO ADR12-0
CK74 PLD2 1
CK74 PLD2 2
REF F PLD2
REF H PLD2
FIELD SEL
PLL EN PLD2
PIERRE A BRR 7-0
PIERRE A BRR F
PIERRE A BRR SYNC
PIERRE A READ F
PIERRE A FSEL
PIERRE B BRR 7-0
PIERRE B BRR F
PIERRE B BRR SYNC
PIERRE B READ F
PIERRE B FSEL
PIERRE B CVID7-0
PIERRE B SB FSYNC
PIERRE B SYNC
PIERRE B READ FRM
PIERRE B FSEL
P B DIVRST
P B NDRST
P B PLL LOCK
PIERRE B DIVRST
PIERRE B NDRST
PIERRE B PLL LOCK
CK74 PIERRE A
P A TDIVSET 4-0
P A DIVRST
P A NDRST
P A PLL LOCK
SYS DBUS2 D7-0
SYS STAT1 1. 0
SYS CLK PIERRE A
SYS STRB PIERRE A
SYS CS PIERRE A
BUSY PIERRE A
RST PIERRE A
PIERRE A CVID
PIERRE A SB FSYNC
PIERRE A SYNC
PIERRE A FSYNC TO READ
PIERRE A F1 F2
PIERRE A COMB
PIERRE A CK 75
PIERRE A TDIVSET
PIERRE A DIVRST
PIERRE A BP
PIERRE A NDRST
PIERRE A LOCK
PIERRE A SYSIO
PIERRE A STA
PIERRE A CK PCN
PIERRE A STRB
PIERRE A CS
PIERRE A BUSY
PIERRE A CLR SYS
PIERRE A MONRST
PIERRE A DLLCD
PIERRE A CD
PIERRE A TRST
PIERRE A MAIN G
PIERRE A MAIN B
PIERRE A MAIN R
PIERRE A SUB G
PIERRE A FSYNC
PIERRE A PB FLD
PIERRE A HSYNC
PIERRE A EXT UNPCK D
PIERRE A EXT UNPCK BA
PIERRE A EXT UNPCK A
PIERRE A EXT UNSHF D
PIERRE A EXT UNSHF BA1
PIERRE A EXT UNSHF A1
PIERRE A EXT UNSHF BA2
PIERRE A EXT UNSHF A2
PIERRE A G 11-0
PIERRE A B 11-0
PIERRE A R 11-0
PIERRE A S 11-0
PIERRE A FSYNC
PIERRE A PB FLD
PIERRE A HSYNC
PIERRE B G 11-0
PIERRE B B 11-0
PIERRE B R 11-0
PIERRE B FSYNC
PIERRE B PB FLD
PIERRE B HSYNC
CK74 PIERRE B BUF
OP COMB 11-0
OP COMB 23-12
OP COMB 35-24
OP COMB F
OP COMB PBF
OP COMB H
P1P2 39-0
HPR MY S6-0
PLD2 TEMPDIODE
SYS DBUS1 D7-0
SYS ADDR A7-0
SYS CLK PLD2
SYS STRB PLD2
SYS RD2
SYS WR2
SYS CS PLD2
BUSY PLD2
RST PLD2
CNF D7-0
DCLK 2
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
TDO PLD2
TDO PLD1
TCK PLD2
TMS PLD2
TRST FPGA
TP701
TP702
TP703
TP704
S102
S102 0-3
D701
D702
DATA
DCLK
nCONFIG
CONFI DONE
INIT DONE
nSTATUS
TDO
TDI
TCK
TMS
TRST

HPR-22 (2/3)

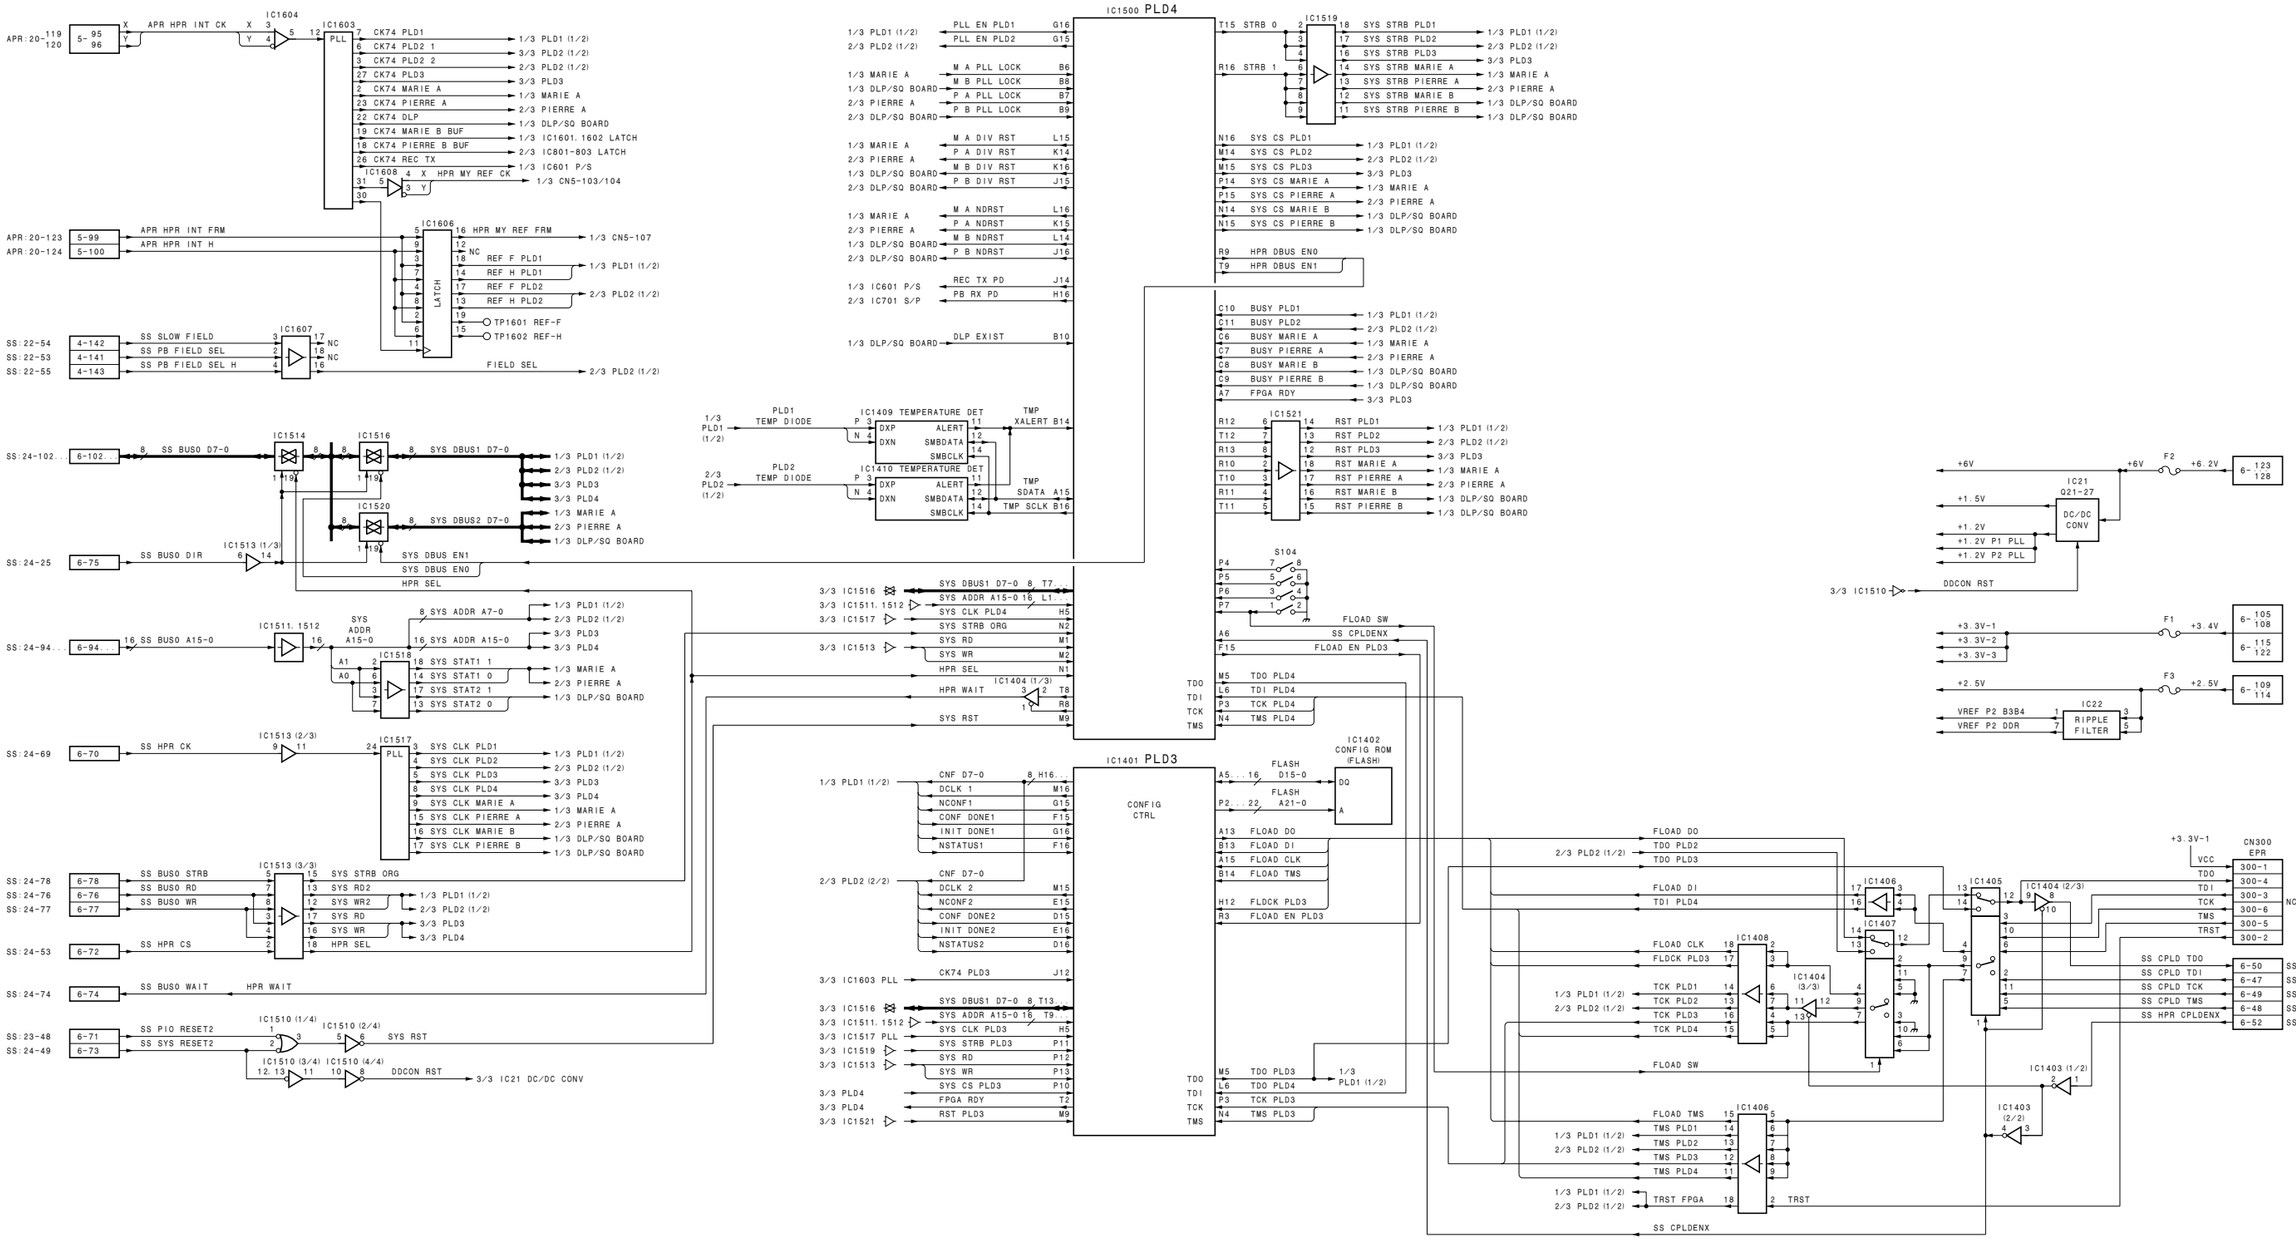
IC1500 PLD4
IC1401 PLD3
CONFIG CTRL
IC1604
IC1603
PLL
IC1608
IC1606
LATCH
IC1607
IC1514
IC1516
IC1520
IC1513 (1/3)
IC1511, 1512
IC1518
SYS ADDR A15-0
IC1513 (2/3)
IC1517
IC1513 (3/3)
IC1510 (1/4)
IC1510 (2/4)
IC1510 (3/4)
IC1510 (4/4)
IC1409 TEMPERATURE DET
IC1410 TEMPERATURE DET
PLD1 TEMP DIODE
PLD2 TEMP DIODE
IC1404 (1/3)
IC1519
IC1521
S104
IC1402 CONFIG ROM (FLASH)
IC1406
IC1408
IC1404 (3/3)
IC1405
IC1407
IC1403 (1/2)
IC1403 (2/2)
IC21 DC/DC CONV
IC22 RIPPLE FILTER
CN300 EPR
SS:24-102..
SS:24-25
SS:24-94...
SS:24-69
SS:24-78
SS:24-76
SS:24-77
SS:24-53
SS:24-74
SS:23-48
SS:24-49
APR:20-119 120
APR:20-123
APR:20-124
SS:22-54
SS:22-53
SS:22-55
SS:23-14
SS:23-11
SS:23-13
SS:23-12
SS:23-16
APR HPR INT CK
APR HPR INT FRM
APR HPR INT H
SS SLOW FIELD
SS PB FIELD SEL
SS PB FIELD SEL H
FIELD SEL
SS BUS0 D7-0
SS BUS0 DIR
SS BUS0 A15-0
SS HPR CK
SS BUS0 STRB
SS BUS0 RD
SS BUS0 WR
SS HPR CS
SS BUS0 WAIT
SS PIO RESET2
SS SYS RESET2
SYS DBUS EN1
SYS DBUS EN0
HPR SEL
HPR WAIT
SYS RST
DDCON RST
SYS DBUS1 D7-0
SYS DBUS2 D7-0
SYS ADDR A7-0
SYS ADDR A15-0
SYS STAT1 1
SYS STAT1 0
SYS STAT2 1
SYS STAT2 0
SYS CLK PLD1
SYS CLK PLD2
SYS CLK PLD3
SYS CLK PLD4
SYS CLK MARIE A
SYS CLK PIERRE A
SYS CLK MARIE B
SYS CLK PIERRE B
SYS STRB ORG
SYS RD2
SYS WR2
SYS RD
SYS WR
HPR MY REF CK
HPR MY REF FRM
REF F PLD1
REF H PLD1
REF F PLD2
REF H PLD2
TP1601 REF-F
TP1602 REF-H
CK74 PLD1
CK74 PLD2 1
CK74 PLD2 2
CK74 PLD3
CK74 MARIE A
CK74 PIERRE A
CK74 DLP
CK74 MARIE B BUF
CK74 PIERRE B BUF
CK74 REC TX
PLL EN PLD1
PLL EN PLD2
M A PLL LOCK
M B PLL LOCK
P A PLL LOCK
P B PLL LOCK
M A DIV RST
P A DIV RST
M B DIV RST
P B DIV RST
M A NDRST
P A NDRST
M B NDRST
P B NDRST
REC TX PD
PB RX PD
DLP EXIST
SYS ADDR A15-0
SYS CLK PLD4
SYS STRB ORG
SYS RD
SYS WR
HPR SEL
HPR WAIT
SYS RST
SYS CS PLD3
FPGA RDY
RST PLD3
CNF D7-0
DCLK 1
NCONF1
CONF DONE1
INIT DONE1
NSTATUS1
DCLK 2
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
CK74 PLD3
FLASH D15-0
FLASH A21-0
FLOAD DO
FLOAD DI
FLOAD CLK
FLOAD TMS
FLDCK PLD3
FLOAD EN PLD3
FLOAD SW
FLOAD EN PLD3
SS CPLDENX
TDO PLD4
TDI PLD4
TCK PLD4
TMS PLD4
TDO PLD3
TDI PLD3
TCK PLD3
TMS PLD3
T15 STRB 0
R16 STRB 1
SYS STRB PLD1
SYS STRB PLD2
SYS STRB PLD3
SYS STRB MARIE A
SYS STRB PIERRE A
SYS STRB MARIE B
SYS STRB PIERRE B
N16 SYS CS PLD1
M14 SYS CS PLD2
M15 SYS CS PLD3
P14 SYS CS MARIE A
P15 SYS CS PIERRE A
N14 SYS CS MARIE B
N15 SYS CS PIERRE B
R9 HPR DBUS EN0
T9 HPR DBUS EN1
C10 BUSY PLD1
C11 BUSY PLD2
C6 BUSY MARIE A
C7 BUSY PIERRE A
C8 BUSY MARIE B
C9 BUSY PIERRE B
A7 FPGA RDY
R12 RST PLD1
T12 RST PLD2
R13 RST PLD3
R10 RST MARIE A
T10 RST PIERRE A
R11 RST MARIE B
T11 RST PIERRE B
TMP XALERT B14
TMP SDATA A15
TMP SCLK B16
DDCON RST
VREF P2 B3B4
VREF P2 DDR
+6V
+1.5V
+1.2V
+1.2V P1 PLL
+1.2V P2 PLL
+3.3V-1
+3.3V-2
+3.3V-3
+2.5V
+6.2V
+3.4V
+2.5V
F2
F1
F3
6-123 128
6-105 108
6-115 122
6-109 114
VCC
TDO
TDI
TCK
TMS
TRST
NC
SS CPLD TDO
SS CPLD TDI
SS CPLD TCK
SS CPLD TMS
SS HPR CPLDENX
6-50
6-47
6-49
6-48
6-52

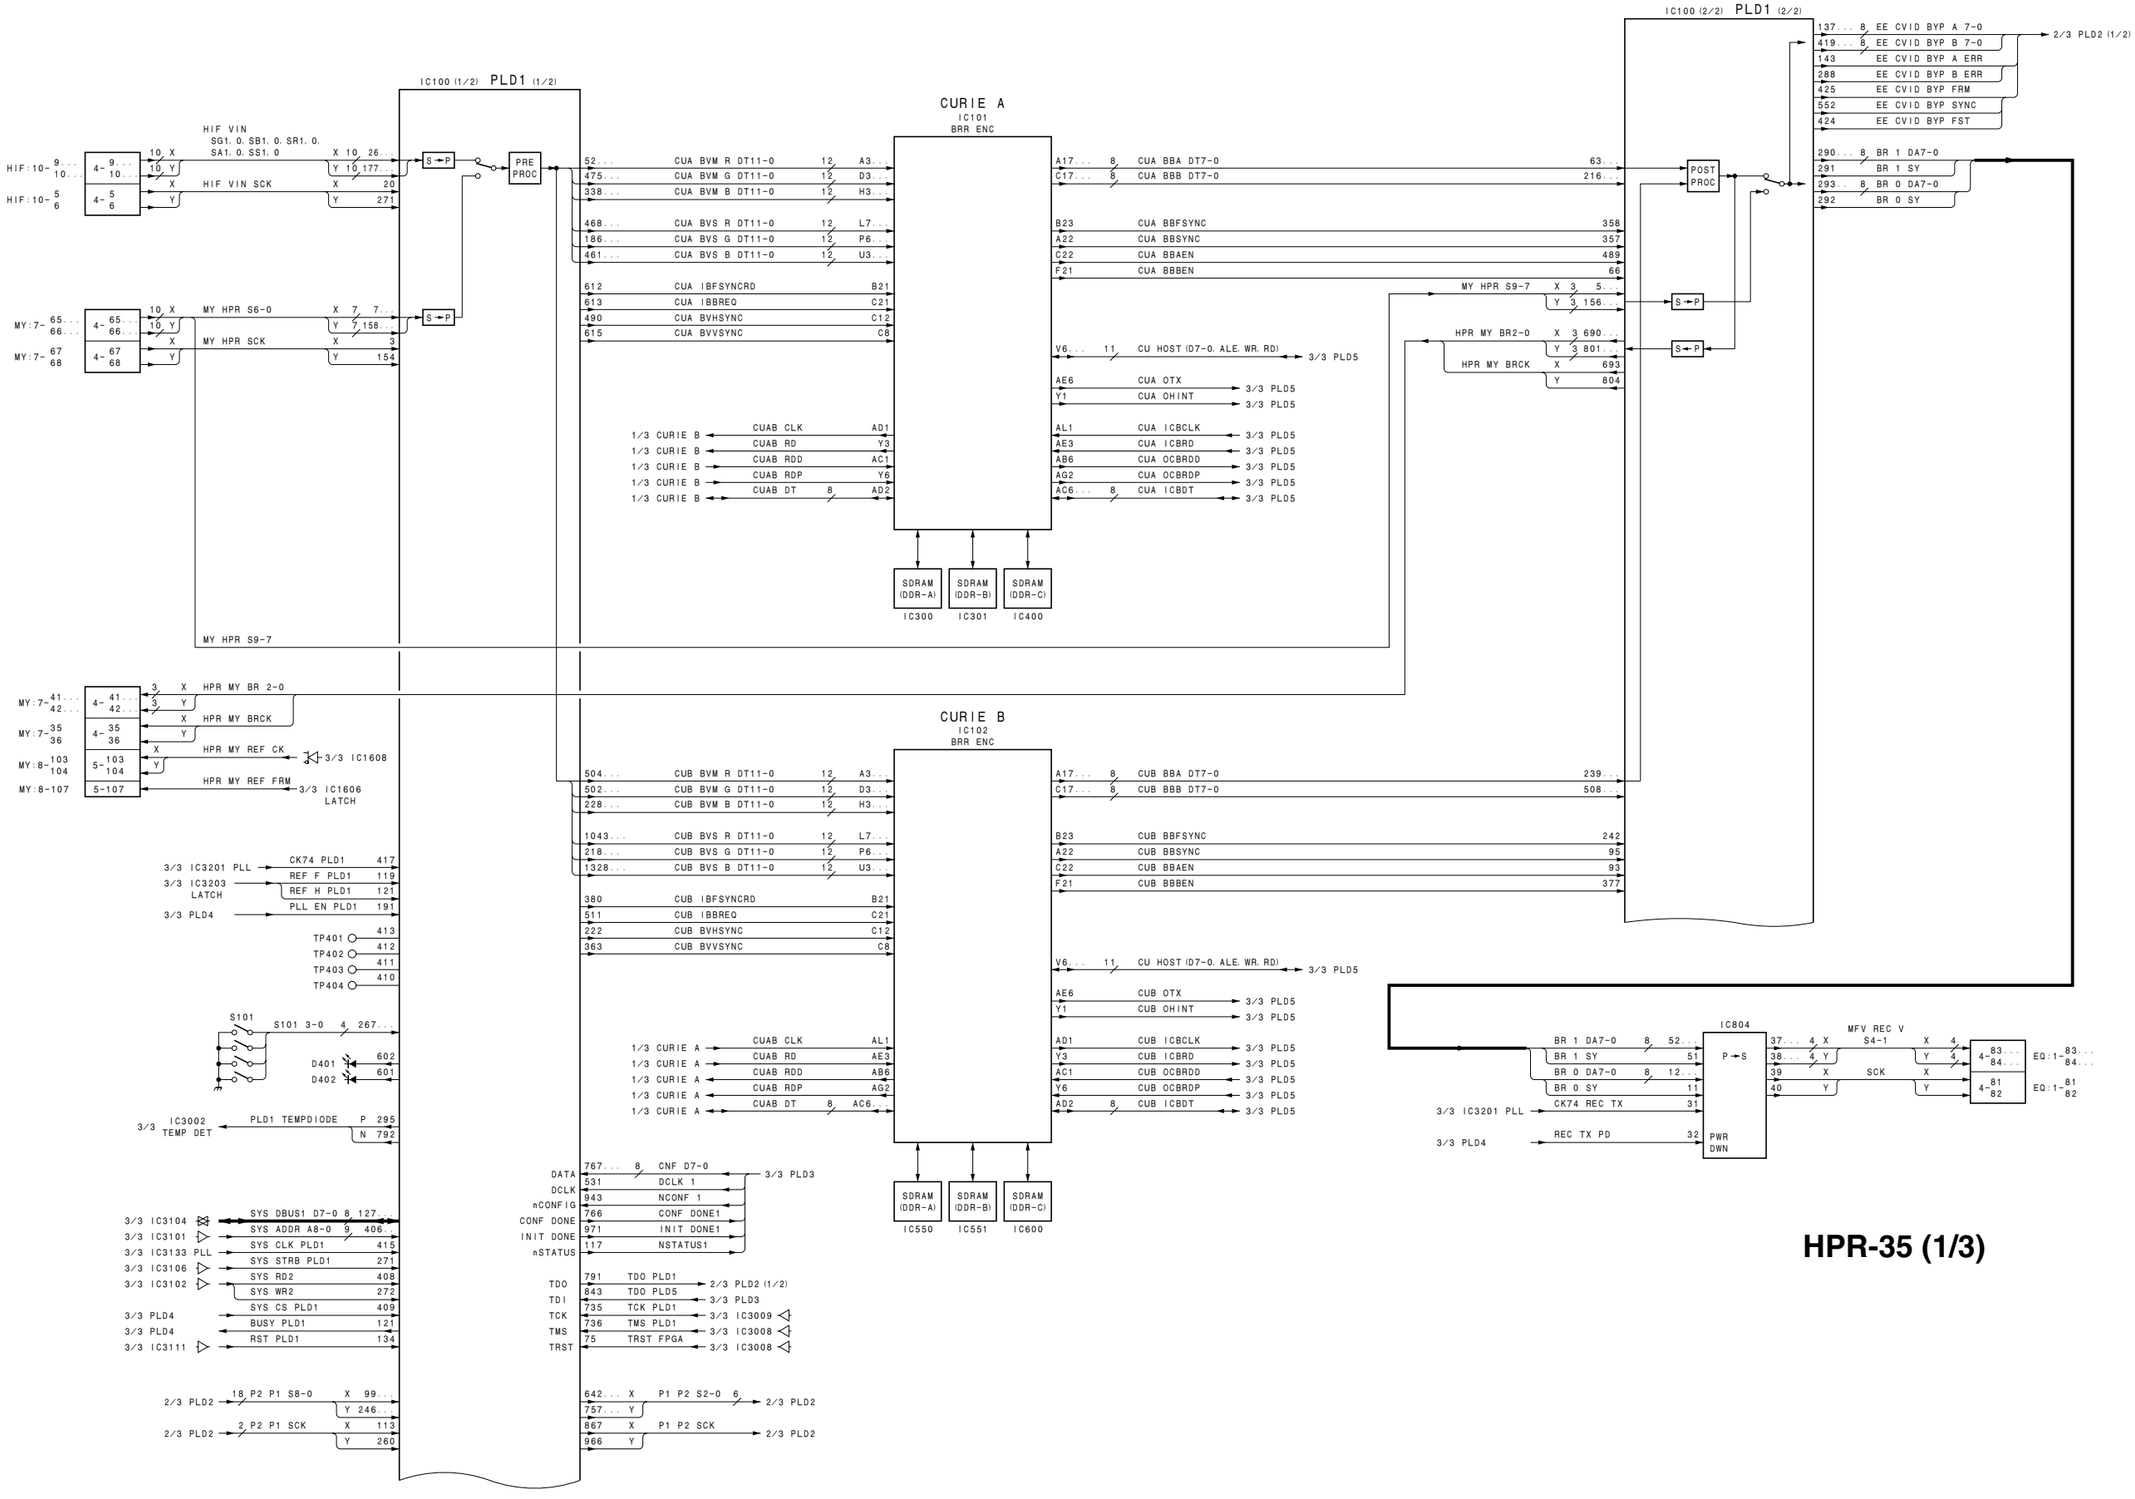
IC100 (1/2) PLD1 (1/2)
IC100 (2/2) PLD1 (2/2)
CURIE A
IC101
BRR ENC
CURIE B
IC102
BRR ENC
HIF VIN
SG1. 0. SB1. 0. SR1. 0.
SA1. 0. SS1. 0
HIF VIN SCK
MY HPR S6-0
MY HPR SCK
MY HPR S9-7
HPR MY BR 2-0
HPR MY BRCK
HPR MY REF CK
HPR MY REF FRM
3/3 IC1608
3/3 IC1606 LATCH
PRE PROC
POST PROC
CUA BVM R DT11-0
CUA BVM G DT11-0
CUA BVM B DT11-0
CUA BVS R DT11-0
CUA BVS G DT11-0
CUA BVS B DT11-0
CUA IBFSYNCRD
CUA IBBREQ
CUA BVHSYNC
CUA BVVSYNC
CUA BBA DT7-0
CUA BBB DT7-0
CUA BBFSYNC
CUA BBSYNC
CUA BBAEN
CUA BBBEN
CU HOST (D7-0. ALE. WR. RD)
CUA OTX
CUA OHINT
CUA ICBCLK
CUA ICBRD
CUA OCBRDD
CUA OCBRDP
CUA ICBDT
CUAB CLK
CUAB RD
CUAB RDD
CUAB RDP
CUAB DT
CUB BVM R DT11-0
CUB BVM G DT11-0
CUB BVM B DT11-0
CUB BVS R DT11-0
CUB BVS G DT11-0
CUB BVS B DT11-0
CUB IBFSYNCRD
CUB IBBREQ
CUB BVHSYNC
CUB BVVSYNC
CUB BBA DT7-0
CUB BBB DT7-0
CUB BBFSYNC
CUB BBSYNC
CUB BBAEN
CUB BBBEN
CU HOST (D7-0. ALE. WR. RD)
CUB OTX
CUB OHINT
CUB ICBCLK
CUB ICBRD
CUB OCBRDD
CUB OCBRDP
CUB ICBDT
SDRAM (DDR-A)
SDRAM (DDR-B)
SDRAM (DDR-C)
IC300
IC301
IC400
IC550
IC551
IC600
EE CVID BYP A 7-0
EE CVID BYP B 7-0
EE CVID BYP A ERR
EE CVID BYP B ERR
EE CVID BYP FRM
EE CVID BYP SYNC
EE CVID BYP FST
BR 1 DA7-0
BR 1 SY
BR 0 DA7-0
BR 0 SY
2/3 PLD2 (1/2)
IC804
MFV REC V
P→S
PWR DWN
BR 1 DA7-0
BR 1 SY
BR 0 DA7-0
BR 0 SY
CK74 REC TX
REC TX PD
S4-1
SCK
EQ: 1-83
EQ: 1-81
CK74 PLD1
REF F PLD1
REF H PLD1
PLL EN PLD1
TP401
TP402
TP403
TP404
S101
D401
D402
PLD1 TEMPDIODE
DATA
DCLK
nCONFIG
CONF DONE
INIT DONE
nSTATUS
CNF D7-0
DCLK 1
NCONF 1
CONF DONE1
INIT DONE1
NSTATUS1
TDO
TDI
TCK
TMS
TRST
TDO PLD1
TDO PLD5
TCK PLD1
TMS PLD1
TRST FPGA
SYS DBUS1 D7-0
SYS ADDR A8-0
SYS CLK PLD1
SYS STRB PLD1
SYS RD2
SYS WR2
SYS CS PLD1
BUSY PLD1
RST PLD1
P1 P2 S2-0
P1 P2 SCK
P2 P1 S8-0
P2 P1 SCK
HPR MY BR2-0
HPR MY BRCK
3/3 PLD2
3/3 PLD3
3/3 PLD4
3/3 PLD5
3/3 IC3201 PLL
3/3 IC3203 LATCH
3/3 IC3002 TEMP DET
3/3 IC3104
3/3 IC3101
3/3 IC3133 PLL
3/3 IC3106
3/3 IC3102
3/3 IC3111
3/3 IC3009
3/3 IC3008
2/3 PLD2

HPR-35 (1/3)

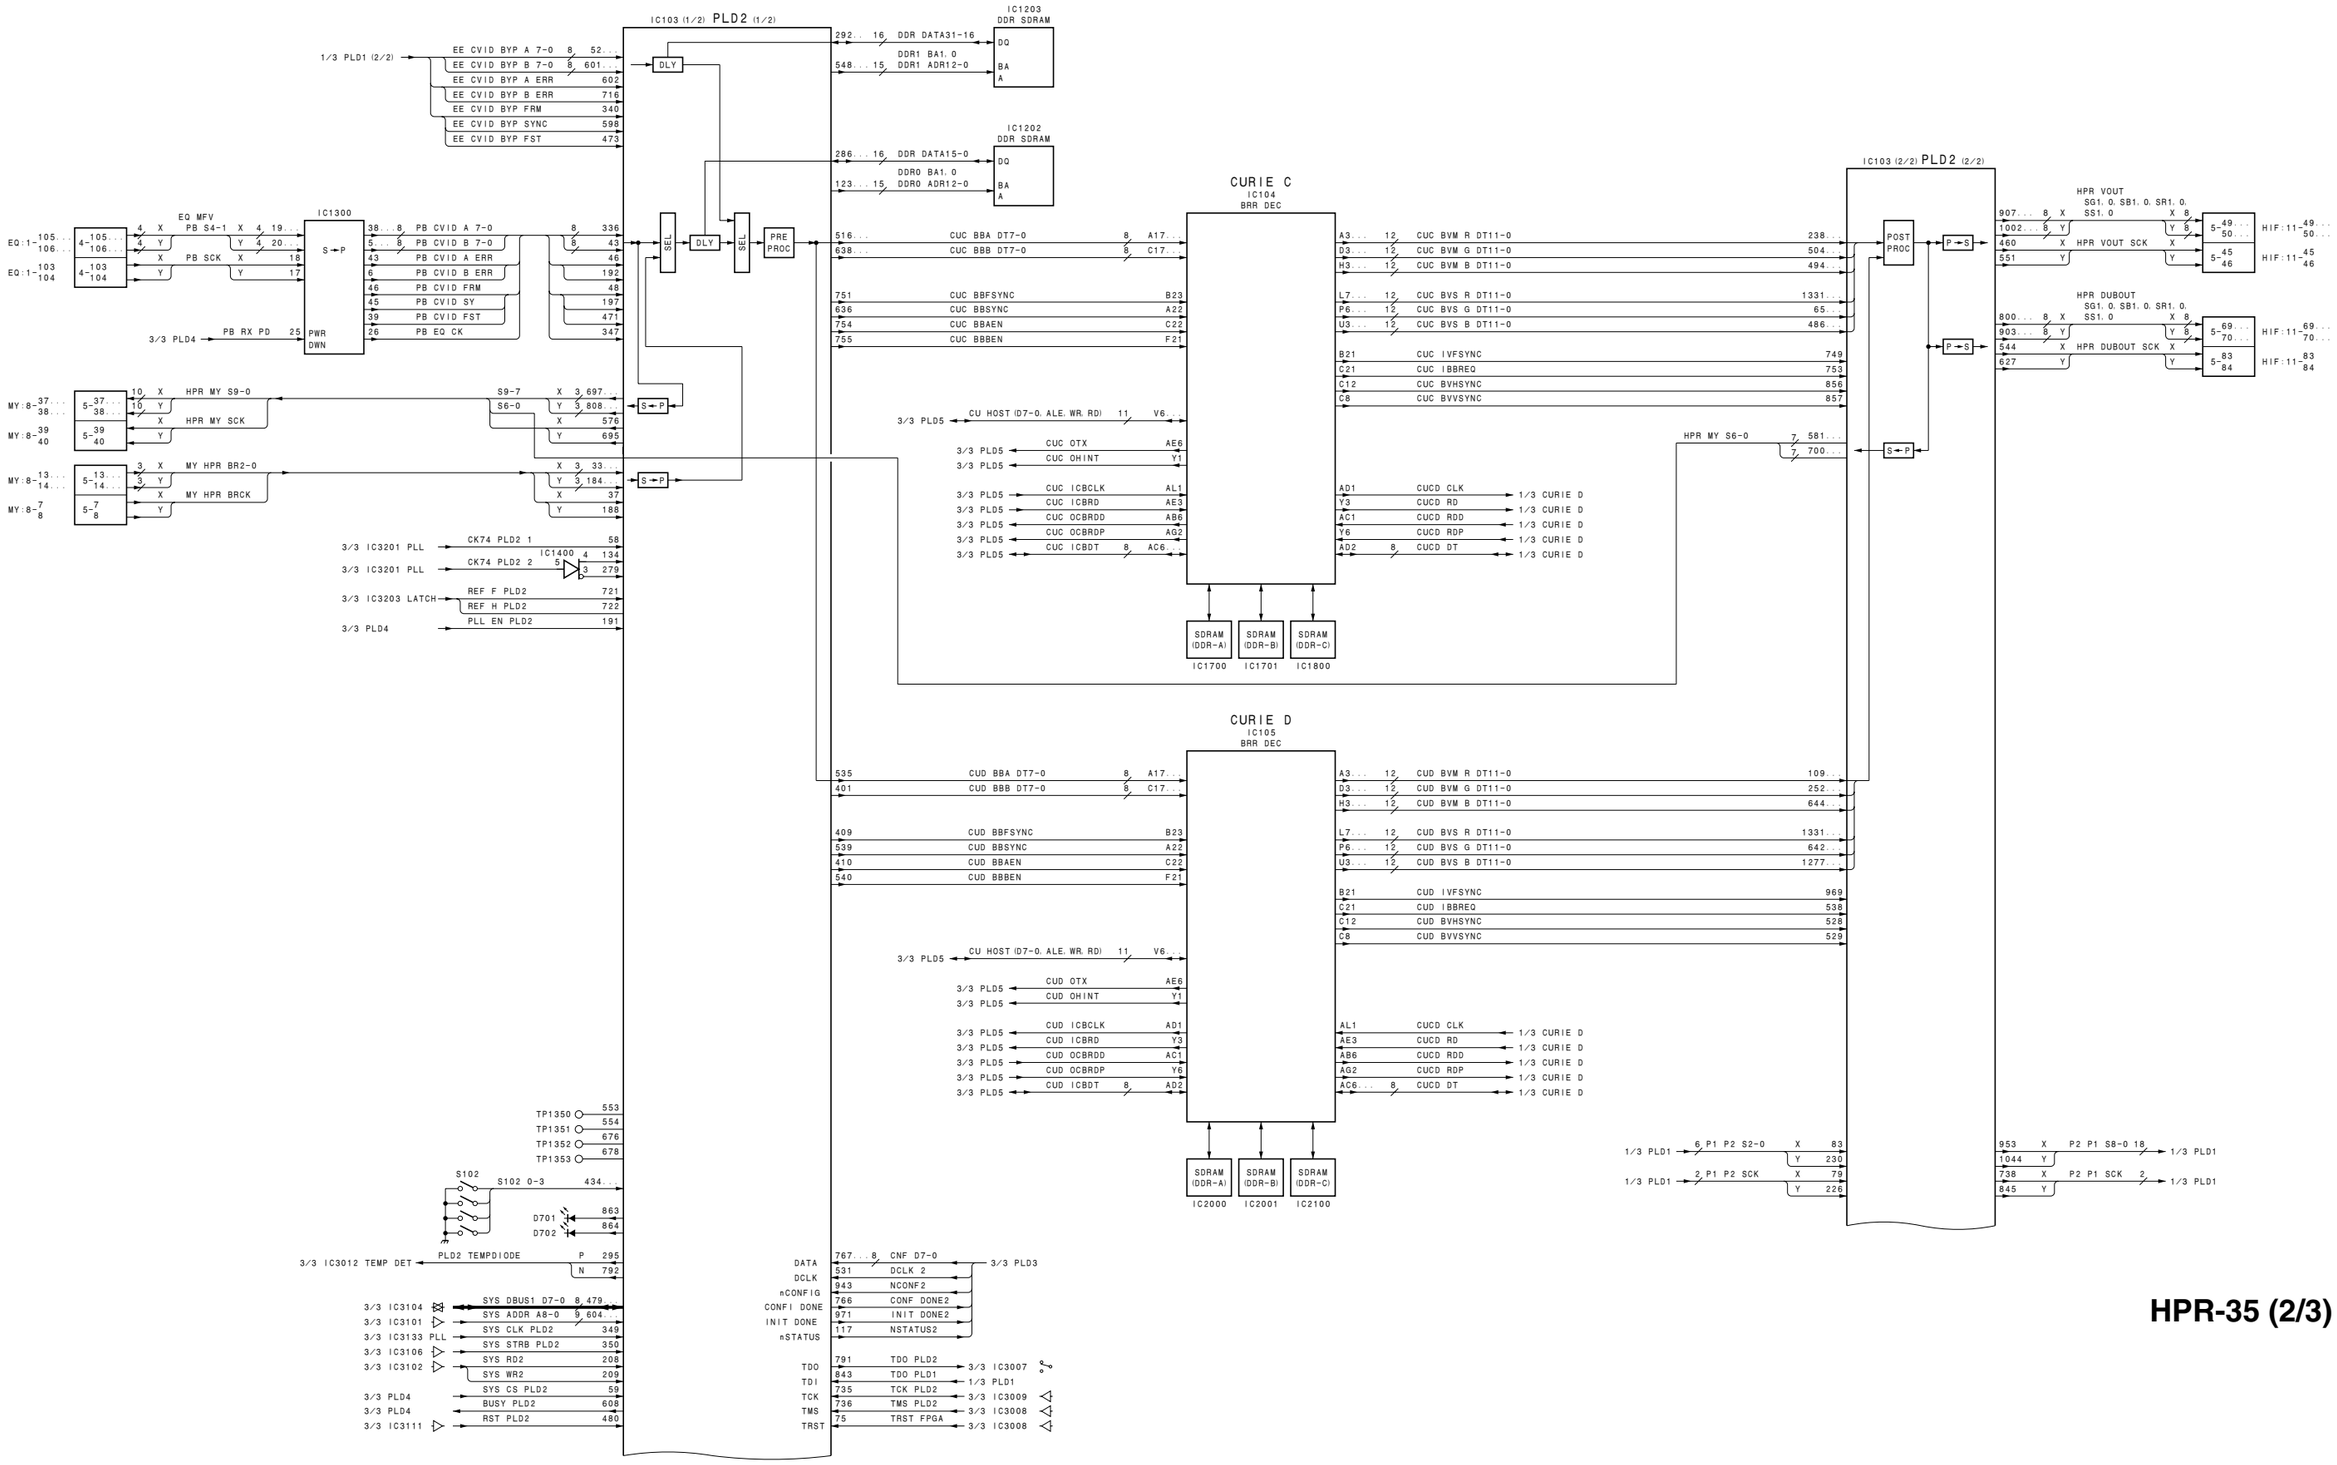
IC103 (1/2) PLD2 (1/2)
1/3 PLD1 (2/2)
EE CVID BYP A 7-0
EE CVID BYP B 7-0
EE CVID BYP A ERR
EE CVID BYP B ERR
EE CVID BYP FRM
EE CVID BYP SYNC
EE CVID BYP FST
DLY
IC1203 DDR SDRAM
DDR DATA31-16
DDR1 BA1. 0
DDR1 ADR12-0
IC1202 DDR SDRAM
DDR DATA15-0
DDR0 BA1. 0
DDR0 ADR12-0
EQ MFV
IC1300
PB S4-1
PB SCK
PB RX PD
PB CVID A 7-0
PB CVID B 7-0
PB CVID A ERR
PB CVID B ERR
PB CVID FRM
PB CVID SY
PB CVID FST
PB EQ CK
SEL
PRE PROC
CURIE C
IC104 BRR DEC
CUC BBA DT7-0
CUC BBB DT7-0
CUC BBFSYNC
CUC BBSYNC
CUC BBAEN
CUC BBBEN
CU HOST (D7-0, ALE, WR, RD)
CUC OTX
CUC OHINT
CUC ICBCLK
CUC ICBRD
CUC OCBRDD
CUC OCBRDP
CUC ICBDT
CUC BVM R DT11-0
CUC BVM G DT11-0
CUC BVM B DT11-0
CUC BVS R DT11-0
CUC BVS G DT11-0
CUC BVS B DT11-0
CUC IVFSYNC
CUC IBBREQ
CUC BVHSYNC
CUC BVVSYNC
CUCD CLK
CUCD RD
CUCD RDD
CUCD RDP
CUCD DT
1/3 CURIE D
SDRAM (DDR-A) IC1700
SDRAM (DDR-B) IC1701
SDRAM (DDR-C) IC1800
IC103 (2/2) PLD2 (2/2)
POST PROC
P→S
S→P
HPR VOUT SG1. 0, SB1. 0, SR1. 0, SS1. 0
HPR VOUT SCK
HPR DUBOUT SG1. 0, SB1. 0, SR1. 0, SS1. 0
HPR DUBOUT SCK
HIF:11-49...50...
HIF:11-45 46
HIF:11-69...70...
HIF:11-83 84
HPR MY S9-0
HPR MY SCK
HPR MY S6-0
MY HPR BR2-0
MY HPR BRCK
CK74 PLD2 1
CK74 PLD2 2
IC1400
REF F PLD2
REF H PLD2
PLL EN PLD2
3/3 IC3201 PLL
3/3 IC3203 LATCH
3/3 PLD4
3/3 PLD5
CURIE D
IC105 BRR DEC
CUD BBA DT7-0
CUD BBB DT7-0
CUD BBFSYNC
CUD BBSYNC
CUD BBAEN
CUD BBBEN
CUD OTX
CUD OHINT
CUD ICBCLK
CUD ICBRD
CUD OCBRDD
CUD OCBRDP
CUD ICBDT
CUD BVM R DT11-0
CUD BVM G DT11-0
CUD BVM B DT11-0
CUD BVS R DT11-0
CUD BVS G DT11-0
CUD BVS B DT11-0
CUD IVFSYNC
CUD IBBREQ
CUD BVHSYNC
CUD BVVSYNC
SDRAM (DDR-A) IC2000
SDRAM (DDR-B) IC2001
SDRAM (DDR-C) IC2100
1/3 PLD1
TP1350
TP1351
TP1352
TP1353
S102
S102 0-3
D701
D702
PLD2 TEMPDIODE
3/3 IC3012 TEMP DET
SYS DBUS1 D7-0
SYS ADDR A8-0
SYS CLK PLD2
SYS STRB PLD2
SYS RD2
SYS WR2
SYS CS PLD2
BUSY PLD2
RST PLD2
3/3 IC3104
3/3 IC3101
3/3 IC3133 PLL
3/3 IC3106
3/3 IC3102
3/3 IC3111
DATA
DCLK
nCONFIG
CONFI DONE
INIT DONE
nSTATUS
CNF D7-0
DCLK 2
NCONF2
CONF DONE2
INIT DONE2
NSTATUS2
TDO
TDI
TCK
TMS
TRST
TDO PLD2
TDO PLD1
TCK PLD2
TMS PLD2
TRST FPGA
3/3 IC3007
3/3 IC3009
3/3 IC3008
6 P1 P2 S2-0
2 P1 P2 SCK
P2 P1 S8-0 18
P2 P1 SCK 2

HPR-35 (2/3)

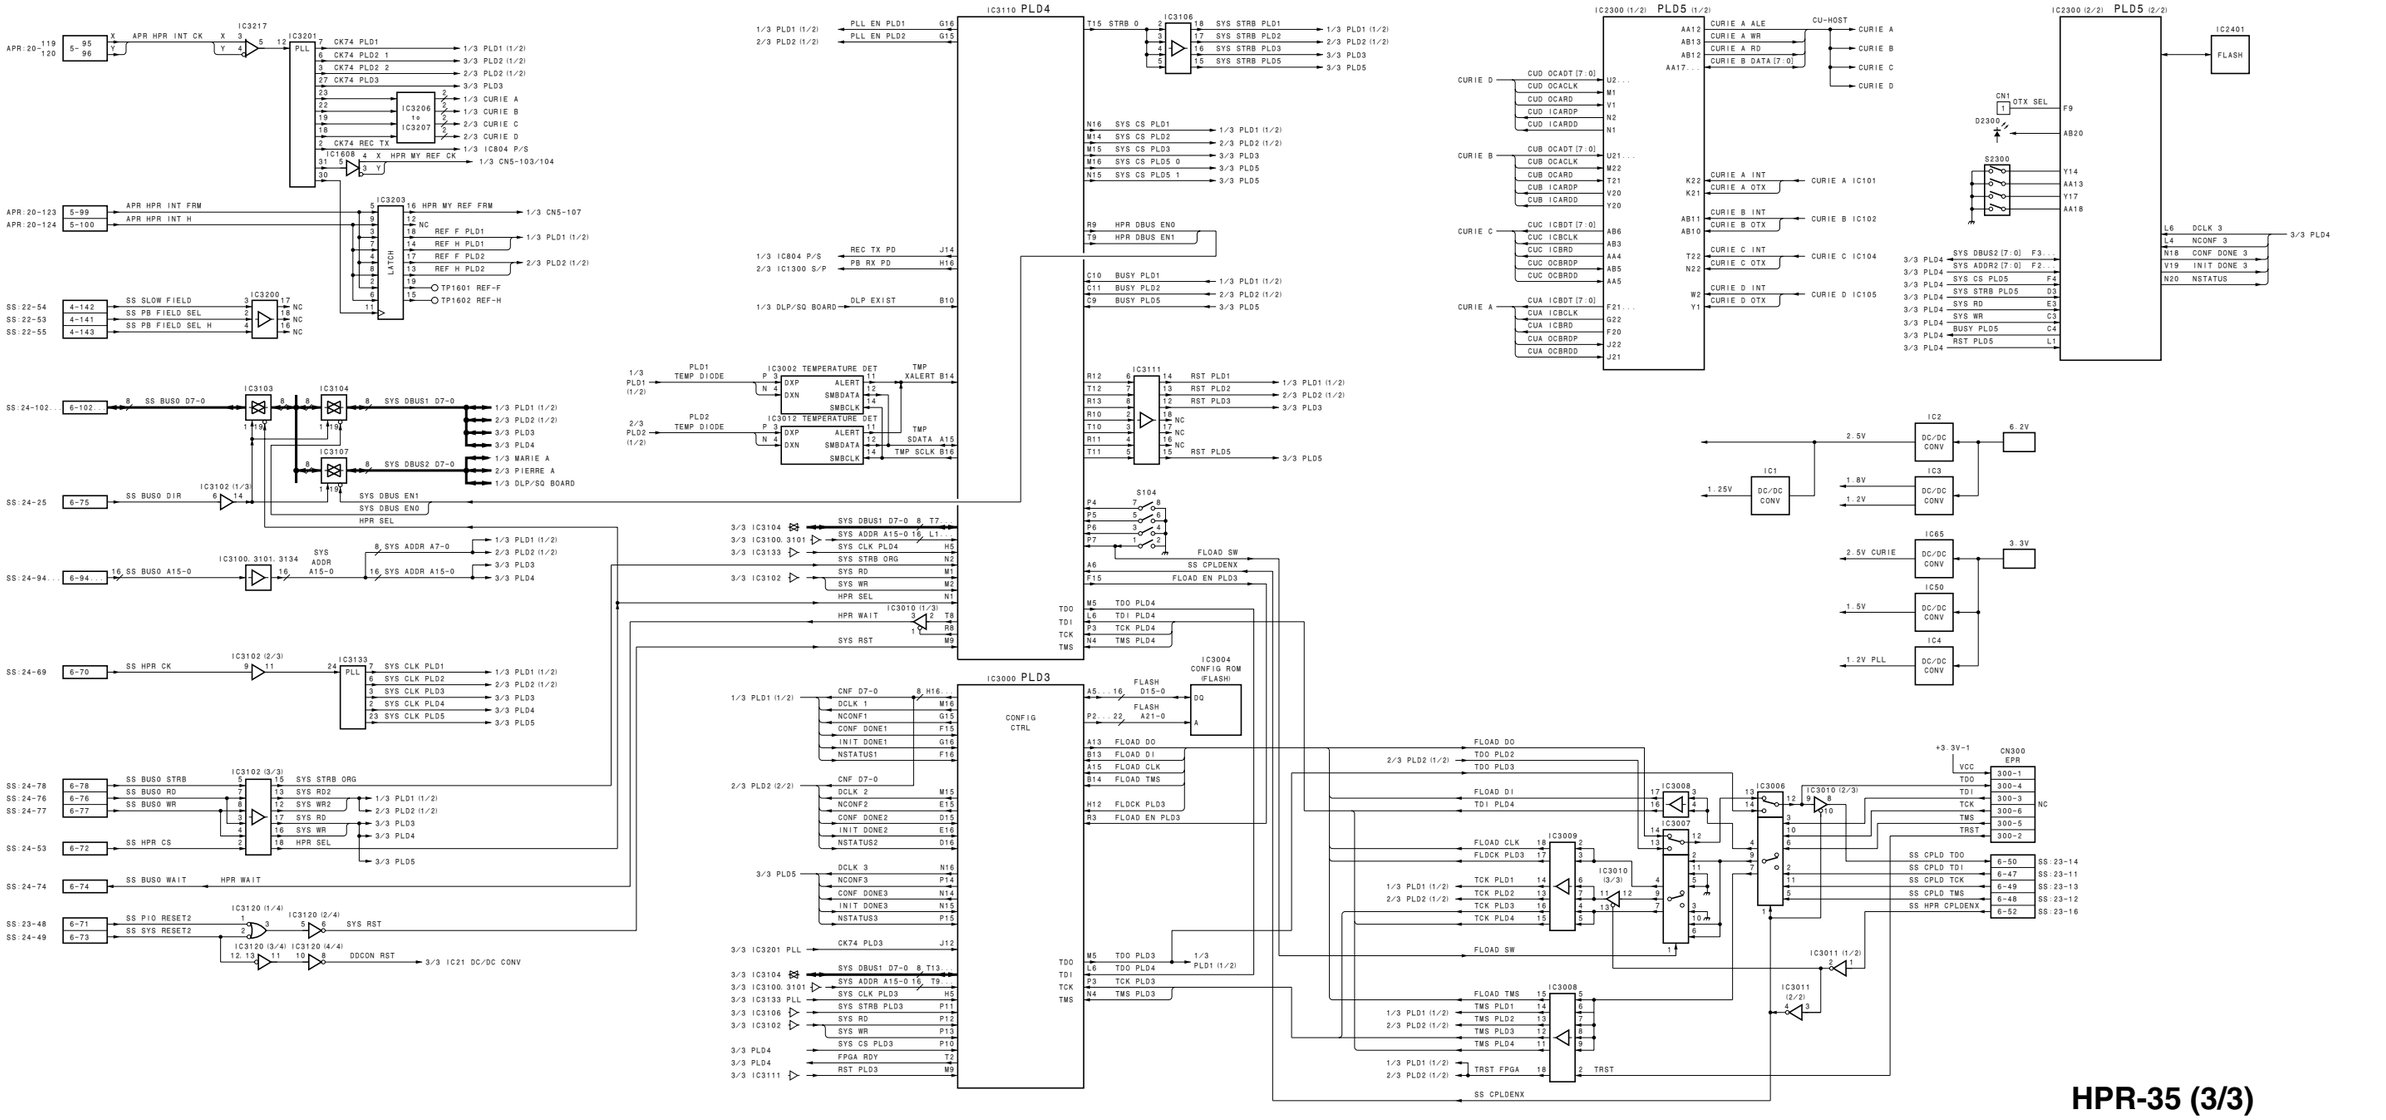
IC3110 PLD4
IC3000 PLD3
IC2300 (1/2) PLD5 (1/2)
IC2300 (2/2) PLD5 (2/2)
IC3217
IC3201
IC3203
IC3200
IC3103
IC3104
IC3107
IC3102 (1/3)
IC3100, 3101, 3134
IC3102 (2/3)
IC3133
IC3102 (3/3)
IC3120 (1/4)
IC3120 (2/4)
IC3120 (3/4)
IC3120 (4/4)
IC3106
IC3012 TEMPERATURE DET
IC3002 TEMPERATURE DET
IC3111
S104
IC3004 CONFIG ROM (FLASH)
IC3008
IC3009
IC3010 (1/3)
IC3010 (2/3)
IC3010 (3/3)
IC3007
IC3006
IC3011 (1/2)
IC3011 (2/2)
IC2401
FLASH
CU-HOST
CURIE A
CURIE B
CURIE C
CURIE D
CURIE A IC101
CURIE B IC102
CURIE C IC104
CURIE D IC105
CN1
D2300
S2300
CN300 EPR
IC2
IC1
IC3
IC65
IC50
IC4
DC/DC CONV
6.2V
3.3V
2.5V
1.8V
1.2V
1.25V
2.5V CURIE
1.5V
1.2V PLL
CONFIG CTRL
SS CPLDENX

3-68

HPR-35 (3/3)

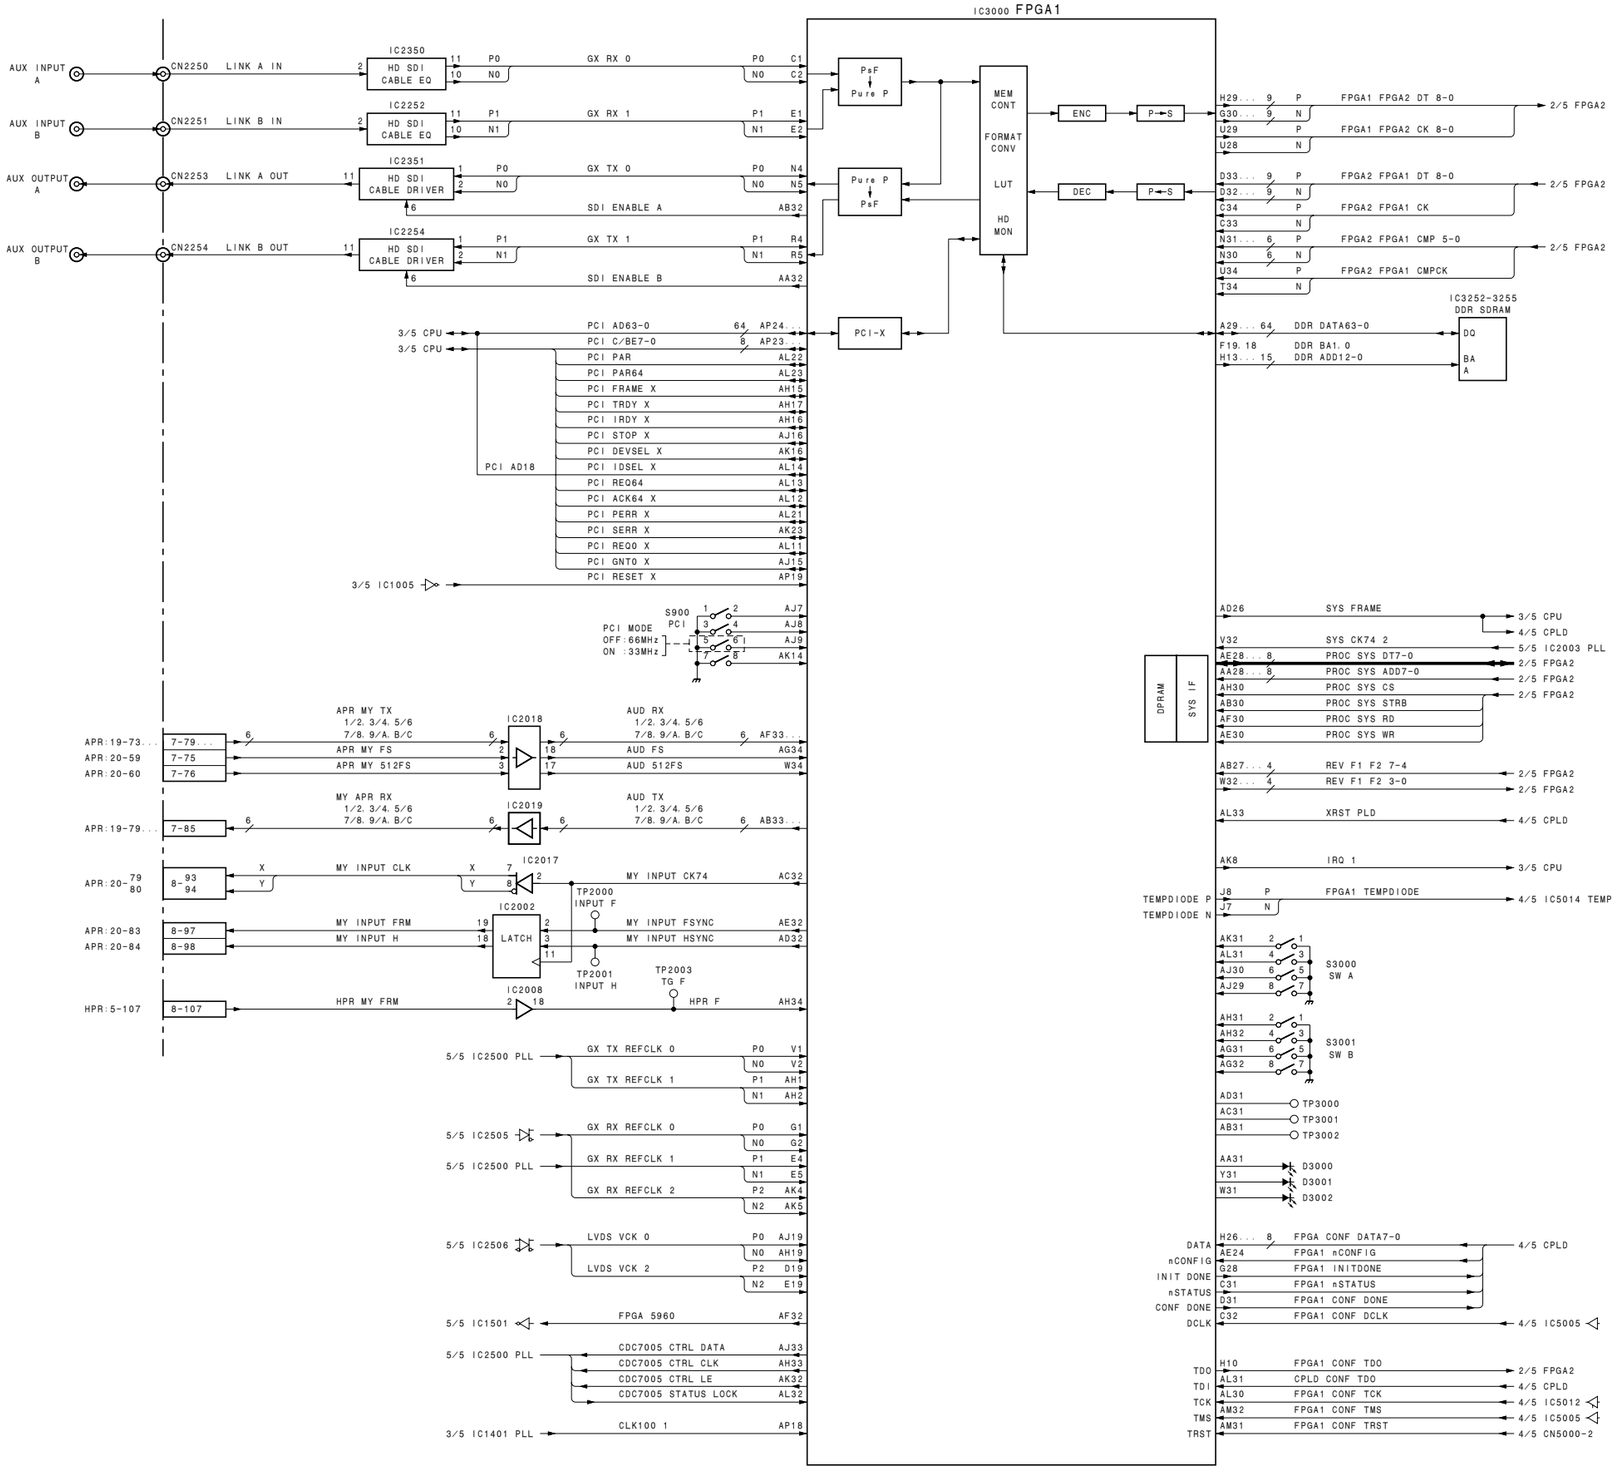

MY-115 (1/5)
For HKSR-5804

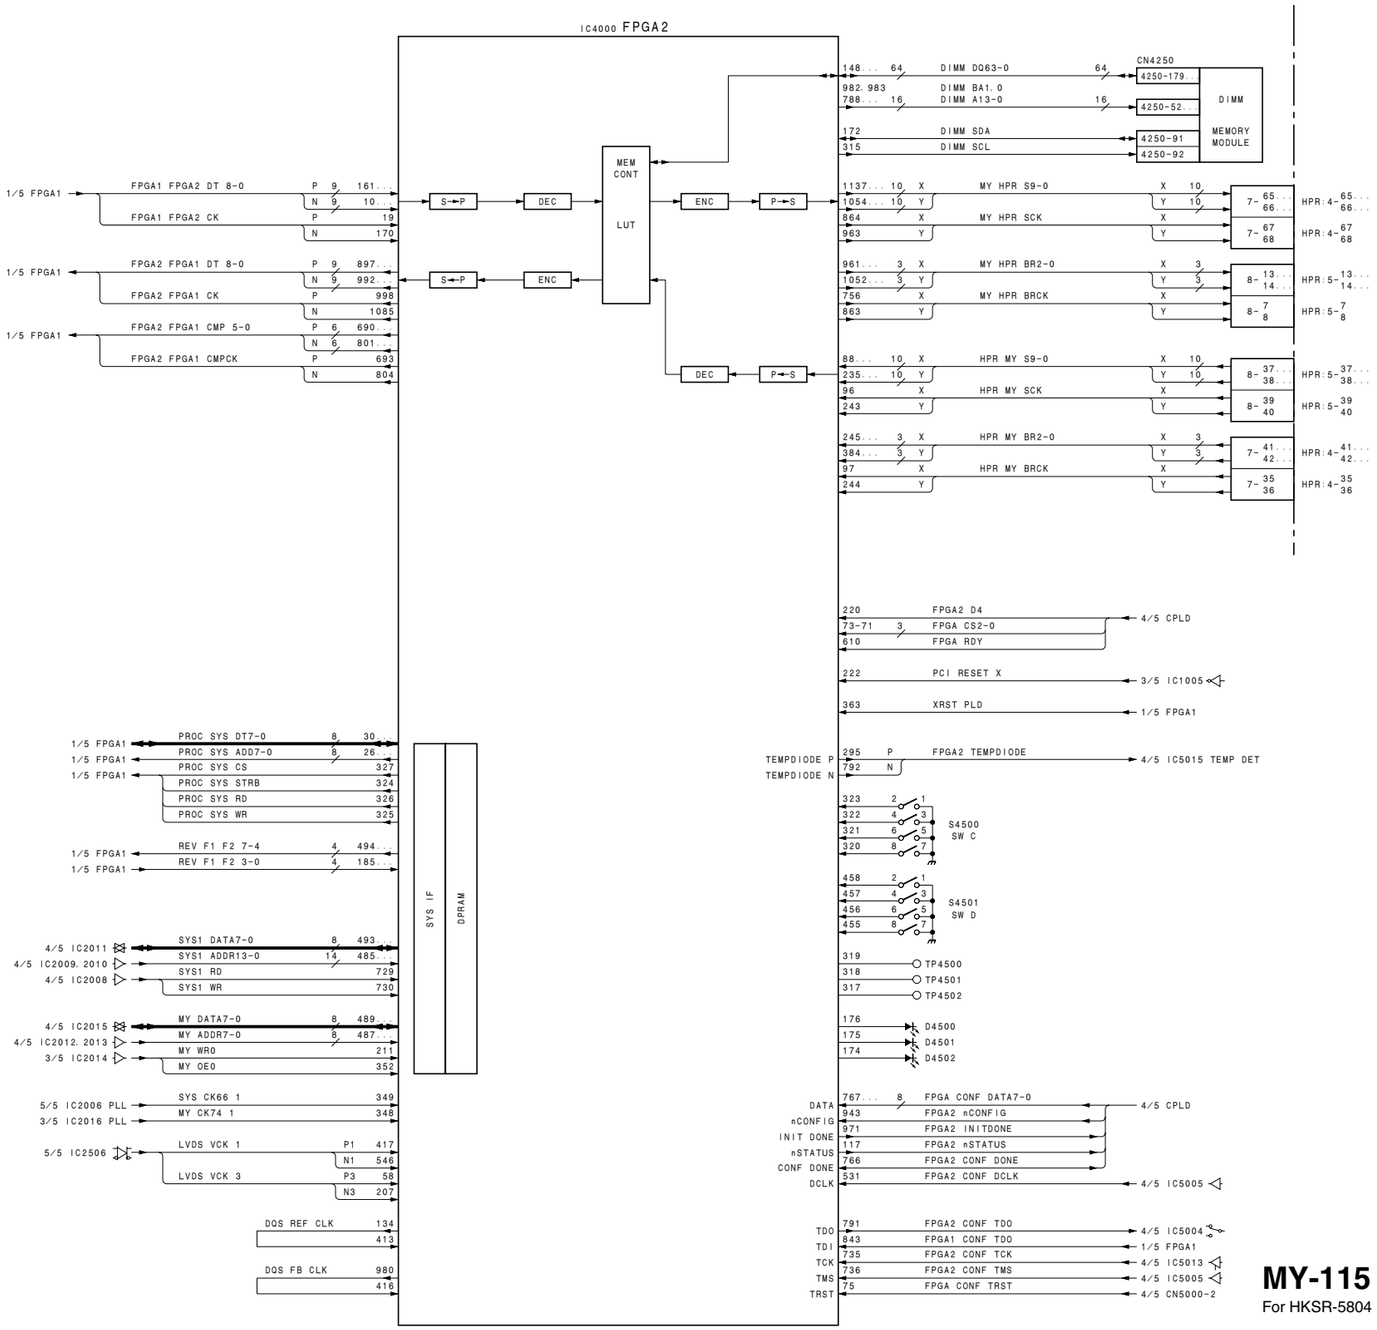

MY-115 (2/5)
For HKSR-5804

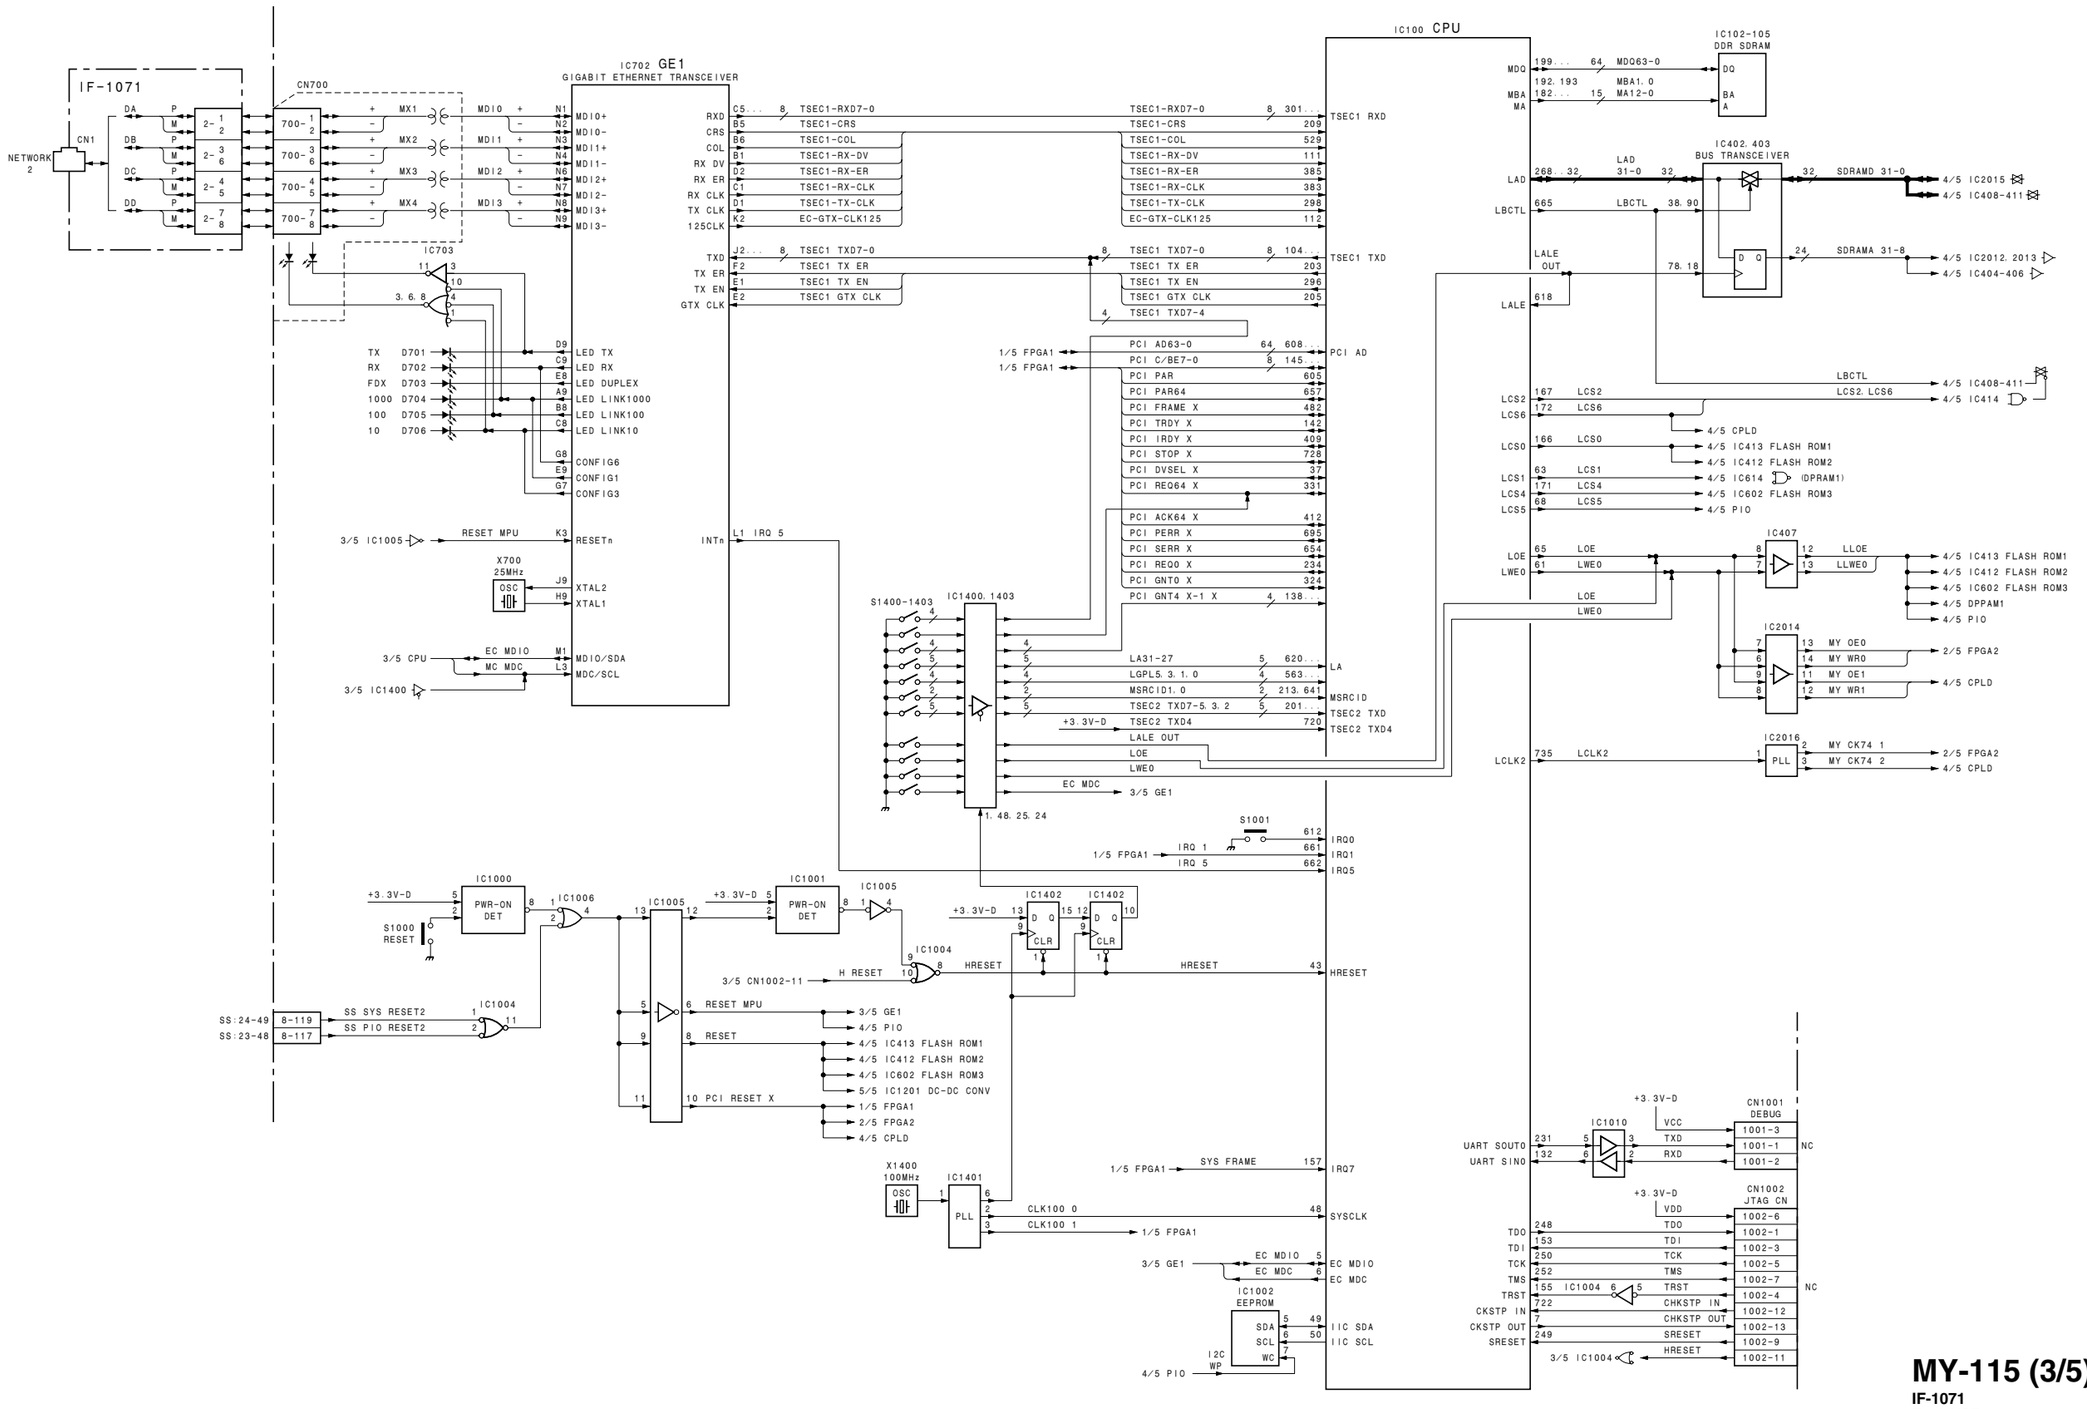

MY-115 (3/5)

IF-1071

For HKSR-5804

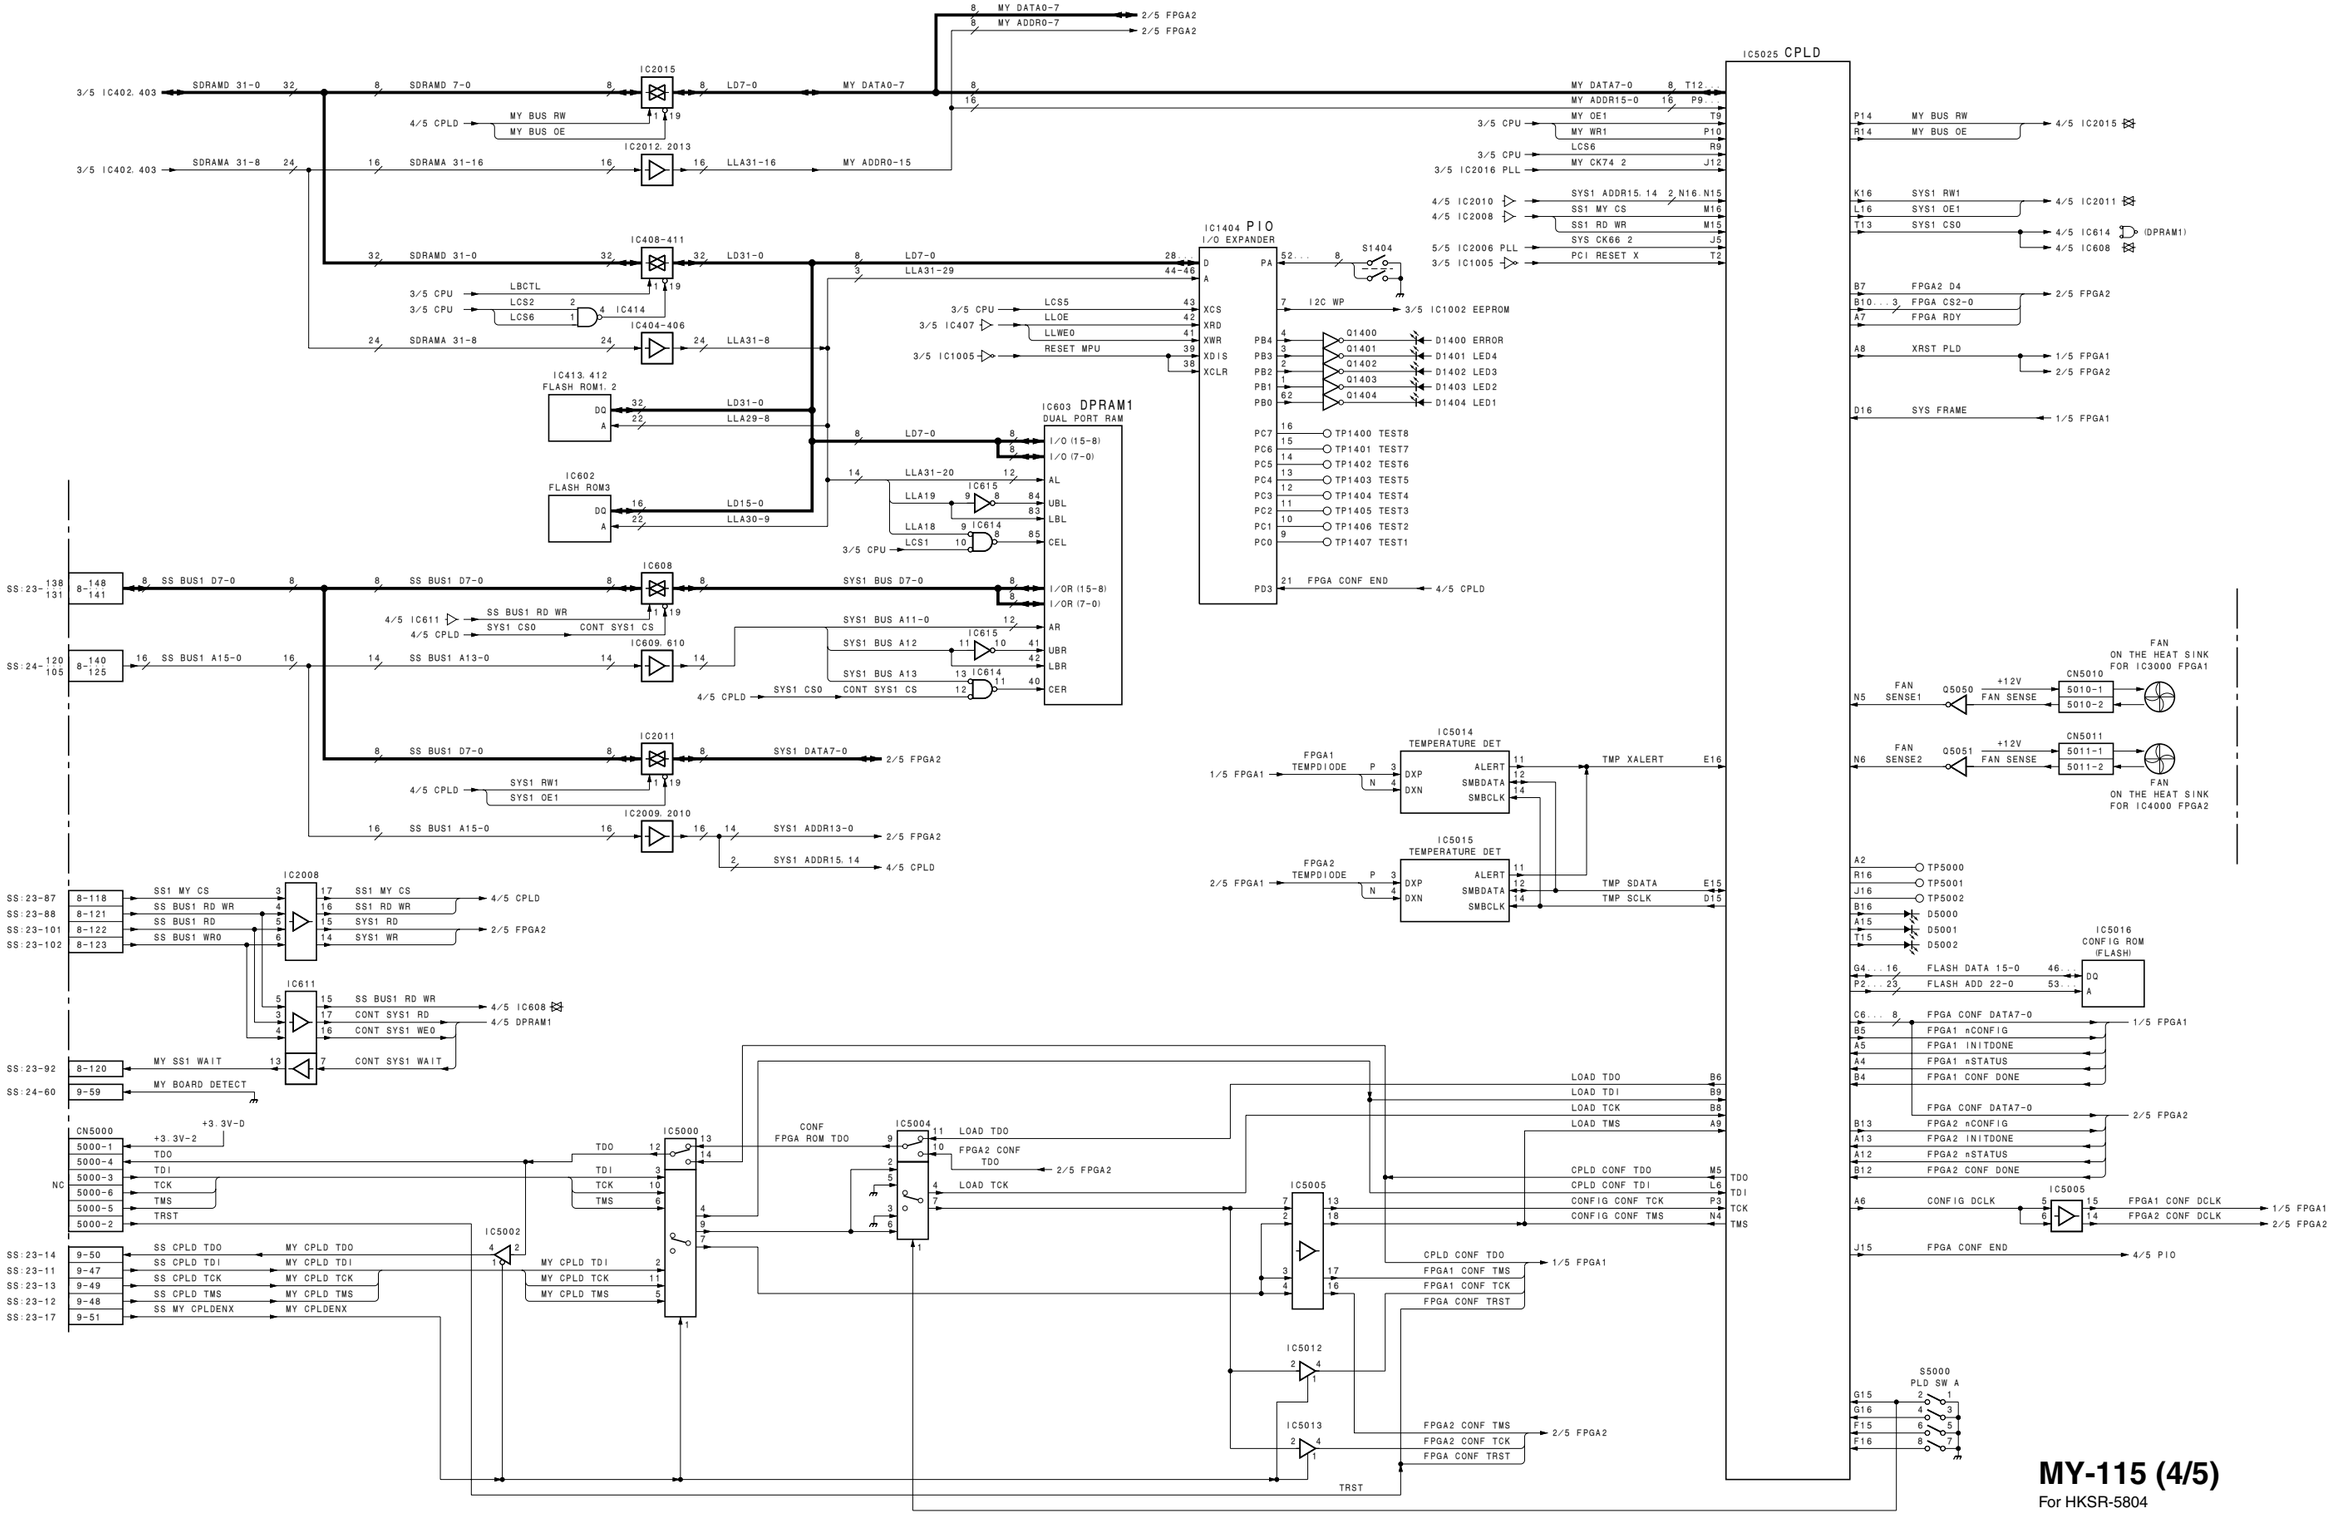

MY-115 (4/5)
For HKSR-5804

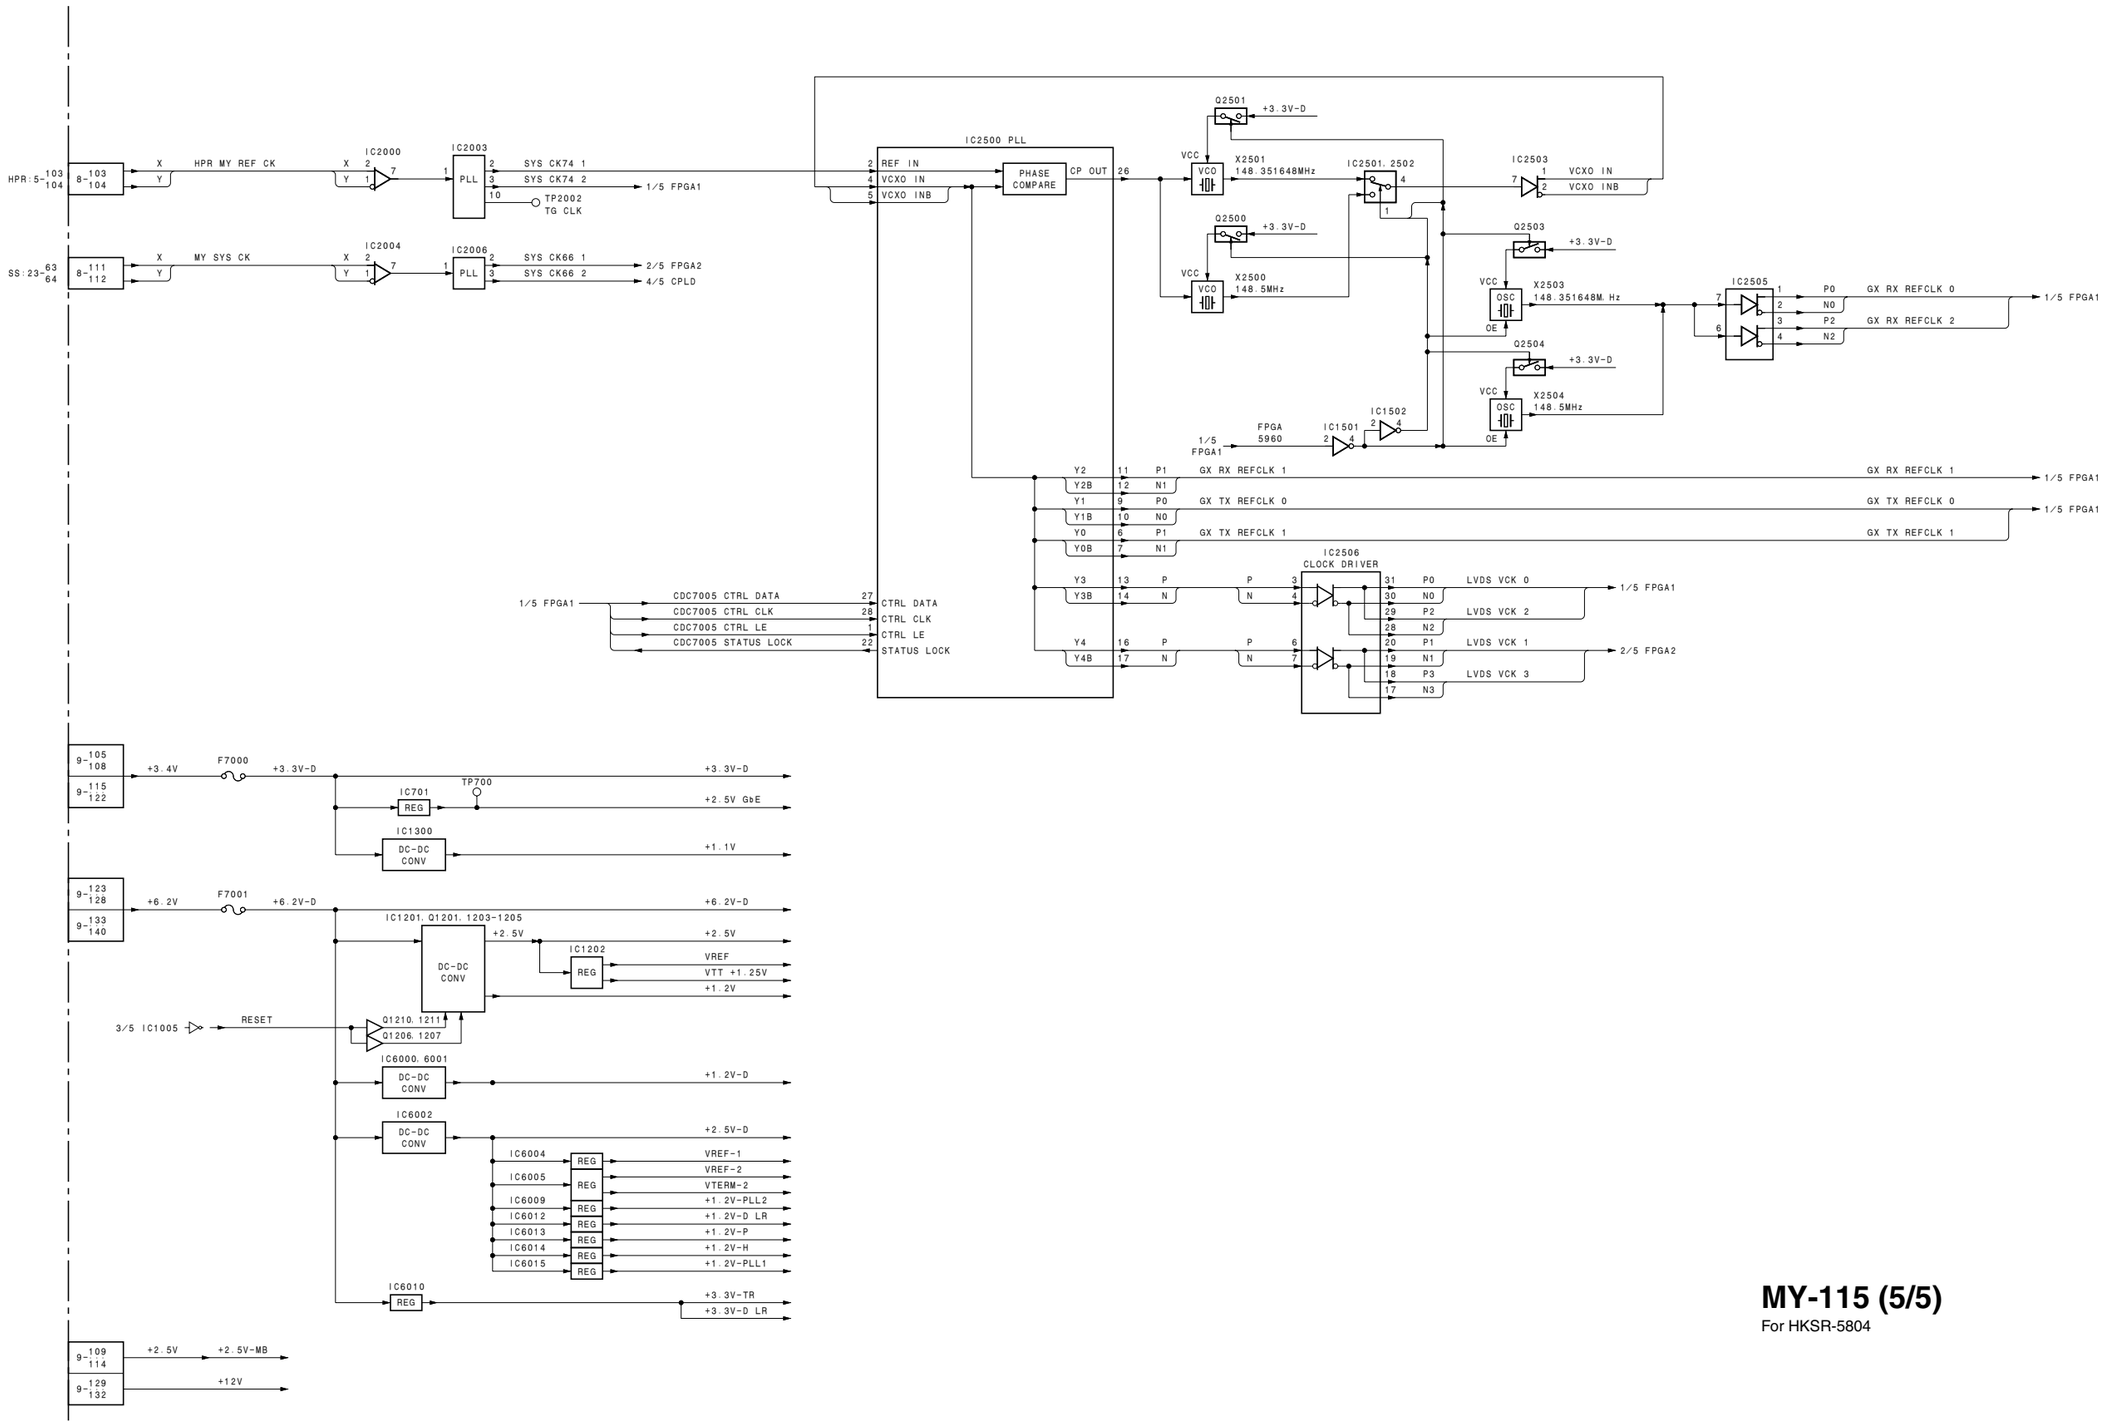

MY-115 (5/5)

For HKSR-5804

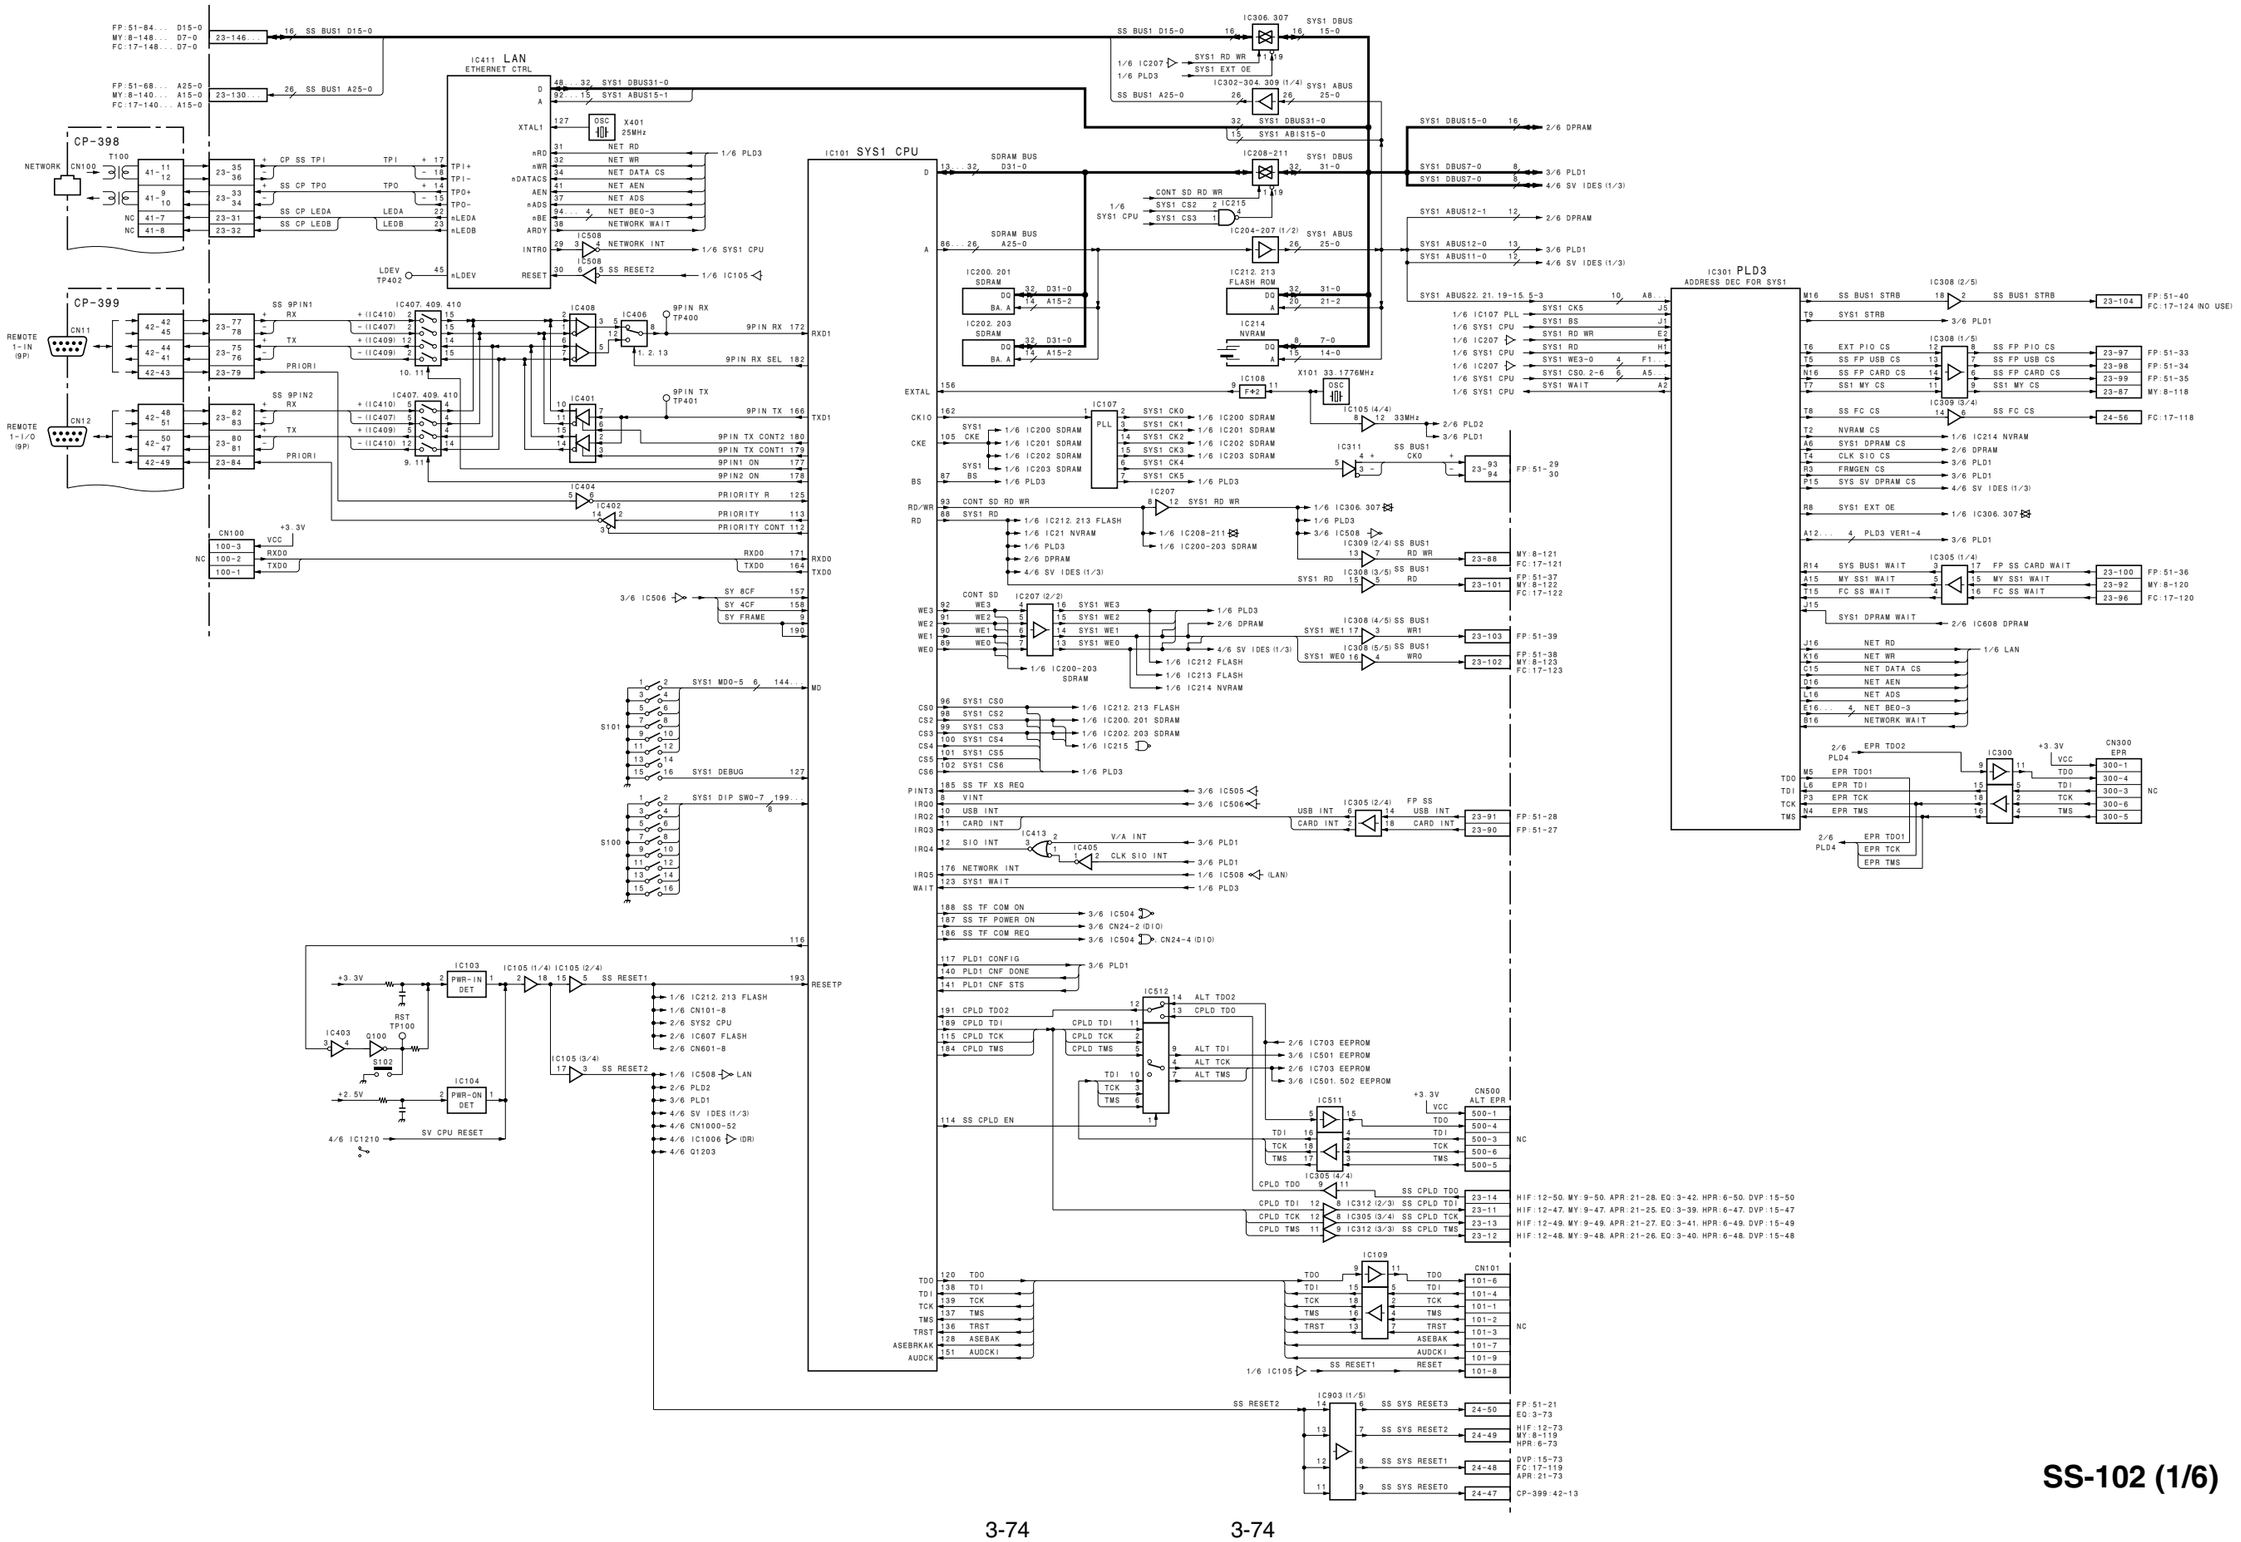
CP-398
CP-399
NETWORK
REMOTE 1-IN (9P)
REMOTE 1-I/O (9P)
IC411 LAN ETHERNET CTRL
IC101 SYS1 CPU
IC301 PLD3
ADDRESS DEC FOR SYS1
SS BUS1 D15-0
SS BUS1 A25-0
SYS1 DBUS 15-0
SYS1 DBUS31-0
SYS1 ABUS15-1
SYS1 ABUS 25-0
SDRAM BUS D31-0
SDRAM BUS A25-0
NET RD
NET WR
NET DATA CS
NET AEN
NET ADS
NET BE0-3
NETWORK WAIT
NETWORK INT
SS RESET2
SS 9PIN1
SS 9PIN2
9PIN RX
9PIN TX
9PIN RX SEL
9PIN TX CONT2
9PIN TX CONT1
9PIN1 ON
9PIN2 ON
PRIORITY R
PRIORITY
PRIORITY CONT
SY 8CF
SY 4CF
SY FRAME
SYS1 MD0-5
SYS1 DEBUG
SYS1 DIP SW0-7
SYS1 RD WR
SYS1 EXT OE
SYS1 RD
SYS1 WE3-0
SYS1 CS0. 2-6
SYS1 WAIT
SYS1 CK5
SYS1 BS
SYS1 CS1
SYS1 CS2
SYS1 CS3
SYS1 CKE
SYS1 DPRAM CS
SYS SV DPRAM CS
CLK SIO CS
FRMGEN CS
SS FP PIO CS
SS FP USB CS
SS FP CARD CS
SS1 MY CS
SS FC CS
NVRAM CS
SYS1 DPRAM WAIT
SYS BUS1 WAIT
MY SS1 WAIT
FC SS WAIT
SS BUS1 STRB
SYS1 STRB
EXT PIO CS
SYS1 EXT OE
SYS1 DPRAM WAIT
EPR TDO2
EPR TDO1
EPR TDI
EPR TCK
EPR TMS
IC103 PWR-IN DET
IC104 PWR-ON DET
RST TP100
S102
+3.3V
+2.5V
SV CPU RESET
SS RESET1
SS RESET2
IC105 (1/4) IC105 (2/4)
IC105 (3/4)
IC105 (4/4)
IC106 (1/2)
IC107 PLL
IC108 F+2
IC109
IC111 FLASH ROM
IC200. 201 SDRAM
IC202. 203 SDRAM
IC204-207 (1/2)
IC208-211
IC212. 213 FLASH ROM
IC214 NVRAM
X101 33.1776MHz
X401 25MHz
IC207 (2/2)
IC309 (2/4) SS BUS1
IC308 (3/5) SS BUS1
IC308 (4/5) SS BUS1
IC308 (5/5) SS BUS1
IC305 (2/4) FP SS
IC305 (4/4)
IC512
ALT TDO2
CPLD TDO
ALT TDI
ALT TCK
ALT TMS
SS CPLD TDO
SS CPLD TDI
SS CPLD TCK
SS CPLD TMS
IC903 (1/5)
SS SYS RESET3
SS SYS RESET2
SS SYS RESET1
SS SYS RESET0
CN100
CN101
CN300 EPR
CN500 ALT EPR
RESETP
MD
1/6 LAN
1/6 PLD3
2/6 DPRAM
3/6 PLD1
4/6 SV IDES (1/3)
2/6 PLD2
3/6 PLD2
1/6 IC214 NVRAM
2/6 DPRAM
3/6 PLD1
4/6 SV IDES (1/3)
1/6 IC306. 307
3/6 PLD1
2/6 IC608 DPRAM
1/6 IC212. 213 FLASH
1/6 CN101-8
2/6 SYS2 CPU
2/6 IC607 FLASH
2/6 CN601-8
1/6 IC508 (LAN)
2/6 PLD2
3/6 PLD1
4/6 SV IDES (1/3)
4/6 CN1000-52
4/6 IC1006 (IDR)
4/6 Q1203
1/6 IC105
3/6 IC504
3/6 CN24-2 (DIO)
3/6 CN24-4 (DIO)
2/6 IC703 EEPROM
3/6 IC501 EEPROM
3/6 IC501. 502 EEPROM
FP:51-40 FC:17-124 (NO USE)
FP:51-33
FP:51-34
FP:51-35
MY:8-118
FC:17-118
FP:51-36
MY:8-120
FC:17-120
FP:51-37
MY:8-122
FC:17-122
FP:51-39
MY:8-123
FC:17-123
FP:51-28
FP:51-27
FP:51-21
EQ:3-73
HIF:12-73
MY:8-119
HPR:6-73
DVP:15-73
FC:17-119
APR:21-73
CP-399:42-13
HIF:12-50. MY:9-50. APR:21-28. EQ:3-42. HPR:6-50. DVP:15-50
HIF:12-47. MY:9-47. APR:21-25. EQ:3-39. HPR:6-47. DVP:15-47
HIF:12-49. MY:9-49. APR:21-27. EQ:3-41. HPR:6-49. DVP:15-49
HIF:12-48. MY:9-48. APR:21-26. EQ:3-40. HPR:6-48. DVP:15-48

SS-102 (1/6)

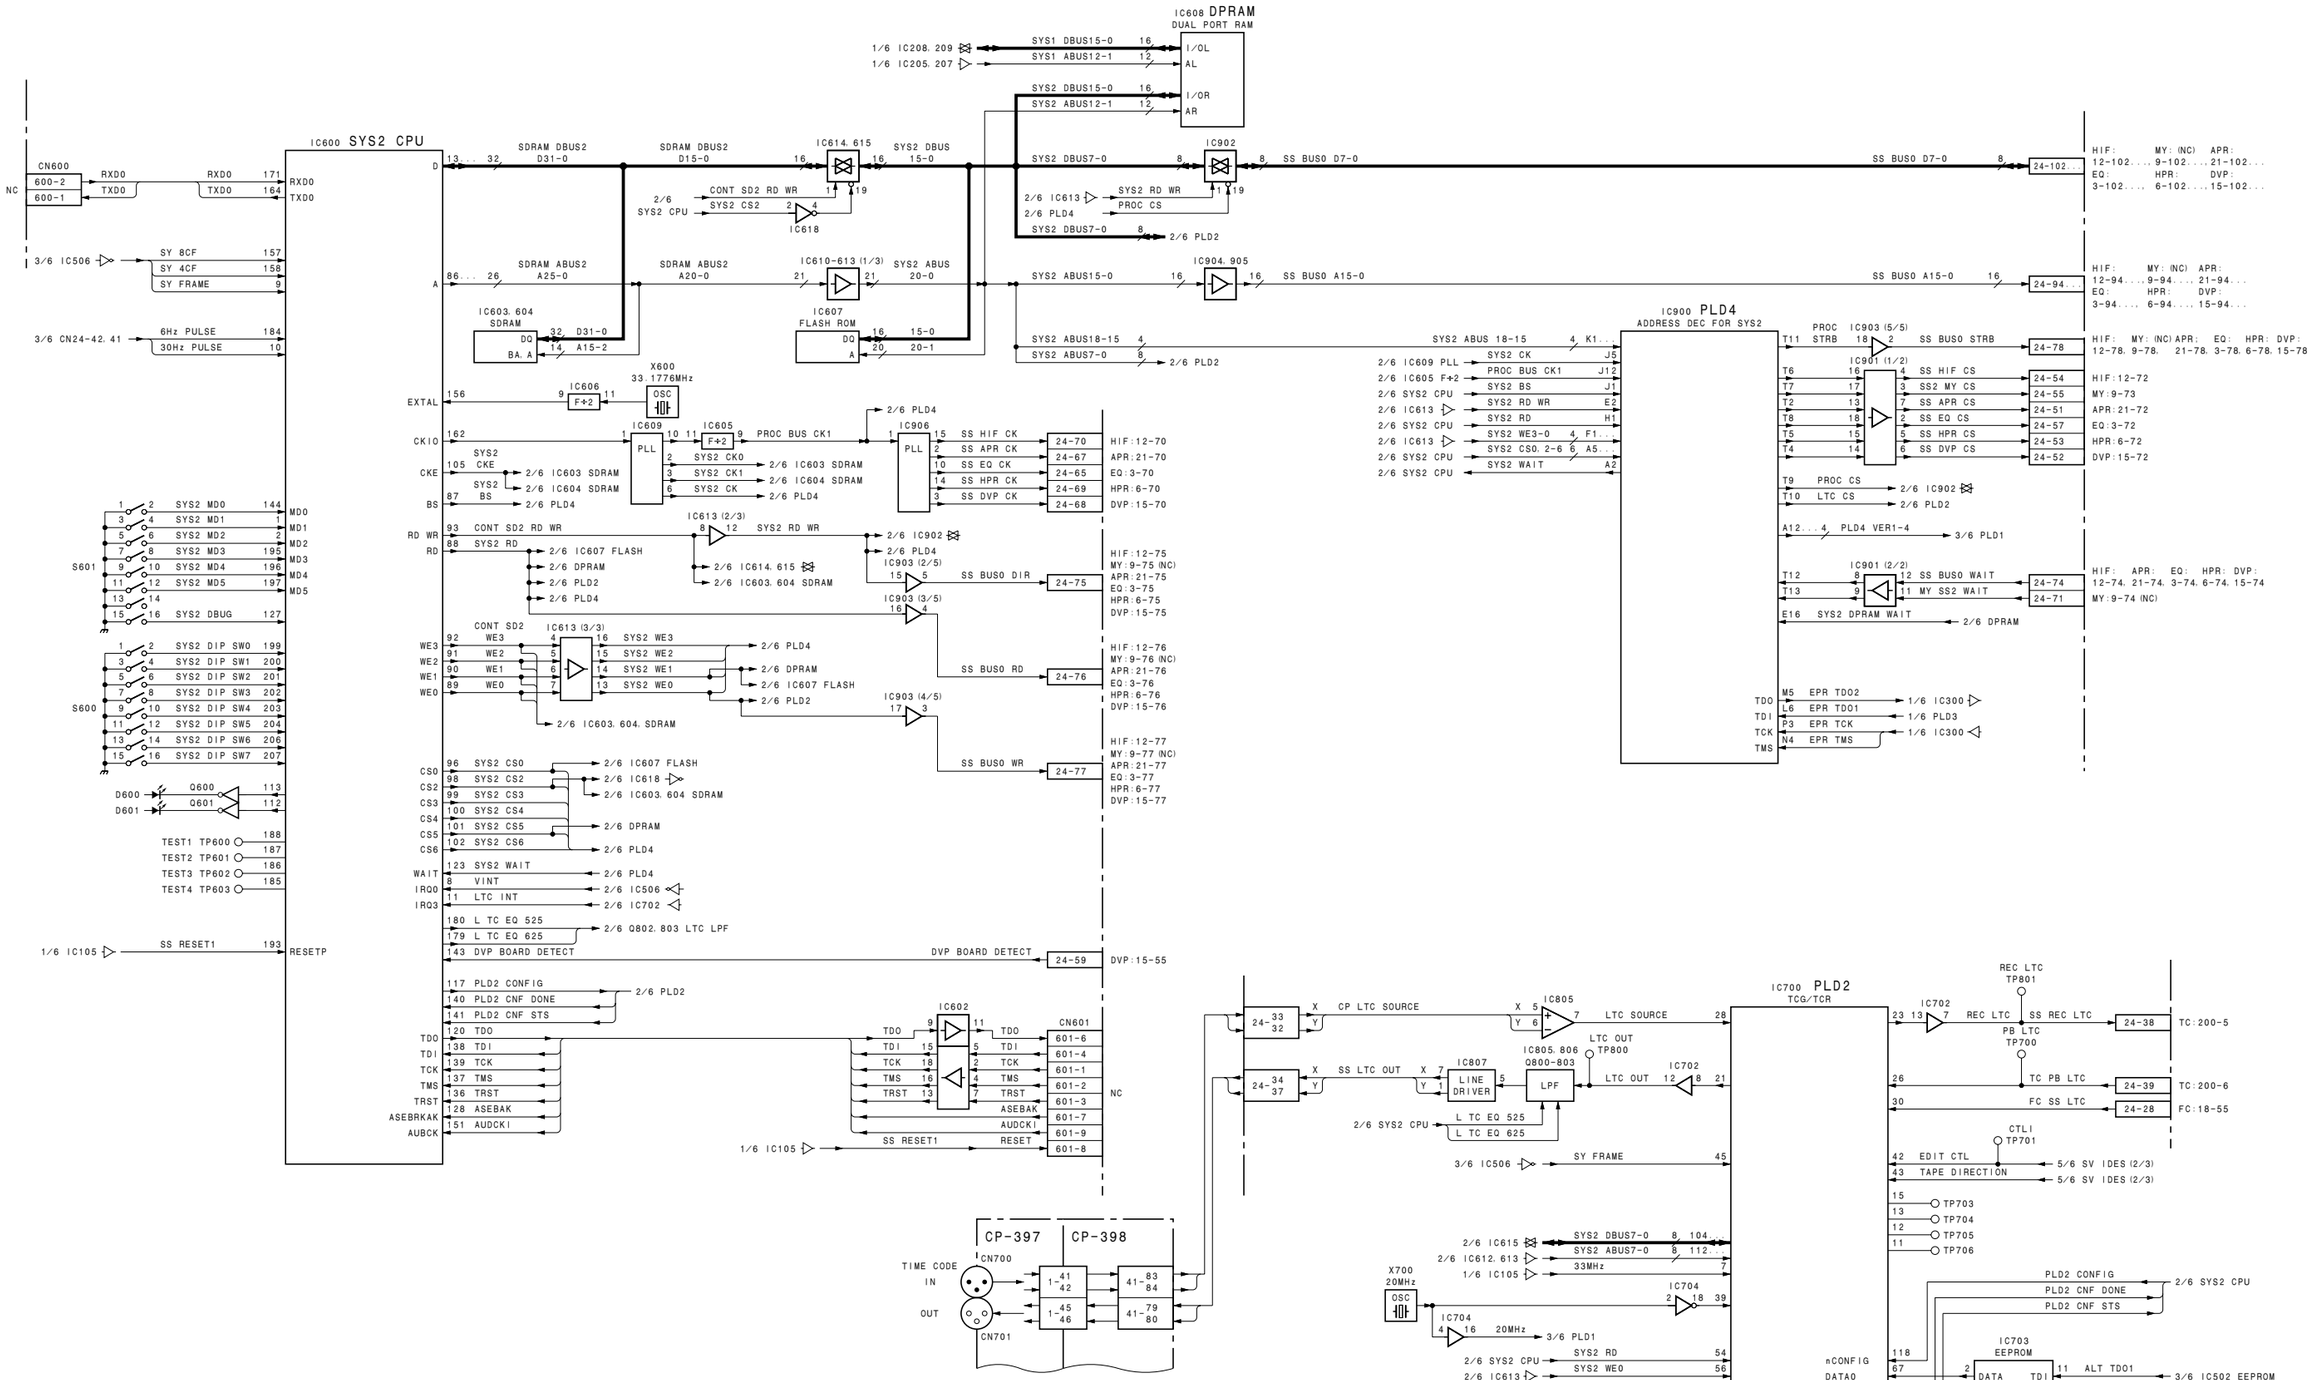
IC608 DPRAM
DUAL PORT RAM
IC600 SYS2 CPU
IC902
IC614, 615
IC610-613 (1/3)
IC603, 604 SDRAM
IC607 FLASH ROM
IC904, 905
IC606
X600 33.1776MHz
IC609
IC605
IC906
IC613 (2/3)
IC613 (3/3)
IC903 (2/5)
IC903 (3/5)
IC903 (4/5)
IC602
CN601
CN600
IC900 PLD4
ADDRESS DEC FOR SYS2
IC901 (1/2)
IC903 (5/5)
IC901 (2/2)
S601
S600
SS BUS0 D7-0
SS BUS0 A15-0
SS BUS0 STRB
SS BUS0 DIR
SS BUS0 RD
SS BUS0 WR
SS BUS0 WAIT
SS RESET1
DVP BOARD DETECT
CONT SD2 RD WR
SYS2 RD WR
PROC CS
LTC CS
SS HIF CS
SS SM CS
SS APR CS
SS EQ CS
SS HPR CS
SS DVP CS
SS SS2 WAIT
SS REC LTC
PB LTC
TC PB LTC
FC SS LTC
REC LTC
TP801
TP700
CTL
TP701
TP703
TP704
TP705
TP706
TC:200-5
TC:200-6
FC:18-55
HIF:12-70
APR:21-70
EQ:3-70
HPR:6-70
DVP:15-70
HIF:12-75
MY:9-75 (NC)
APR:21-75
EQ:3-75
HPR:6-75
DVP:15-75
HIF:12-76
MY:9-76 (NC)
APR:21-76
EQ:3-76
HPR:6-76
DVP:15-76
HIF:12-77
MY:9-77 (NC)
APR:21-77
EQ:3-77
HPR:6-77
DVP:15-77
HIF:12-78, 9-78, 21-78, 3-78, 6-78, 15-78
HIF:12-72
MY:9-73
APR:21-72
EQ:3-72
HPR:6-72
DVP:15-72
HIF:12-74, 21-74, 3-74, 6-74, 15-74
MY:9-74 (NC)
CP-397
CP-398
IC700 PLD2
TCG/TCR
IC805
IC807
IC805, 806
Q800-803
IC702
IC704
IC703
EEPROM
X700
20MHz
LINE DRIVER
LPF
CP LTC SOURCE
SS LTC OUT
LTC SOURCE
LTC OUT
L TC EQ 525
L TC EQ 625
SY FRAME
PLD2 CONFIG
PLD2 CNF DONE
PLD2 CNF STS
EDIT CTL
TAPE DIRECTION
nCONFIG
DATA0
DCLK
CONF DONE
nSTATUS
ALT TDO1
ALT TCK
ALT TMS
ALT TDO2
EPR TDO2
EPR TDO1
EPR TCK
EPR TMS

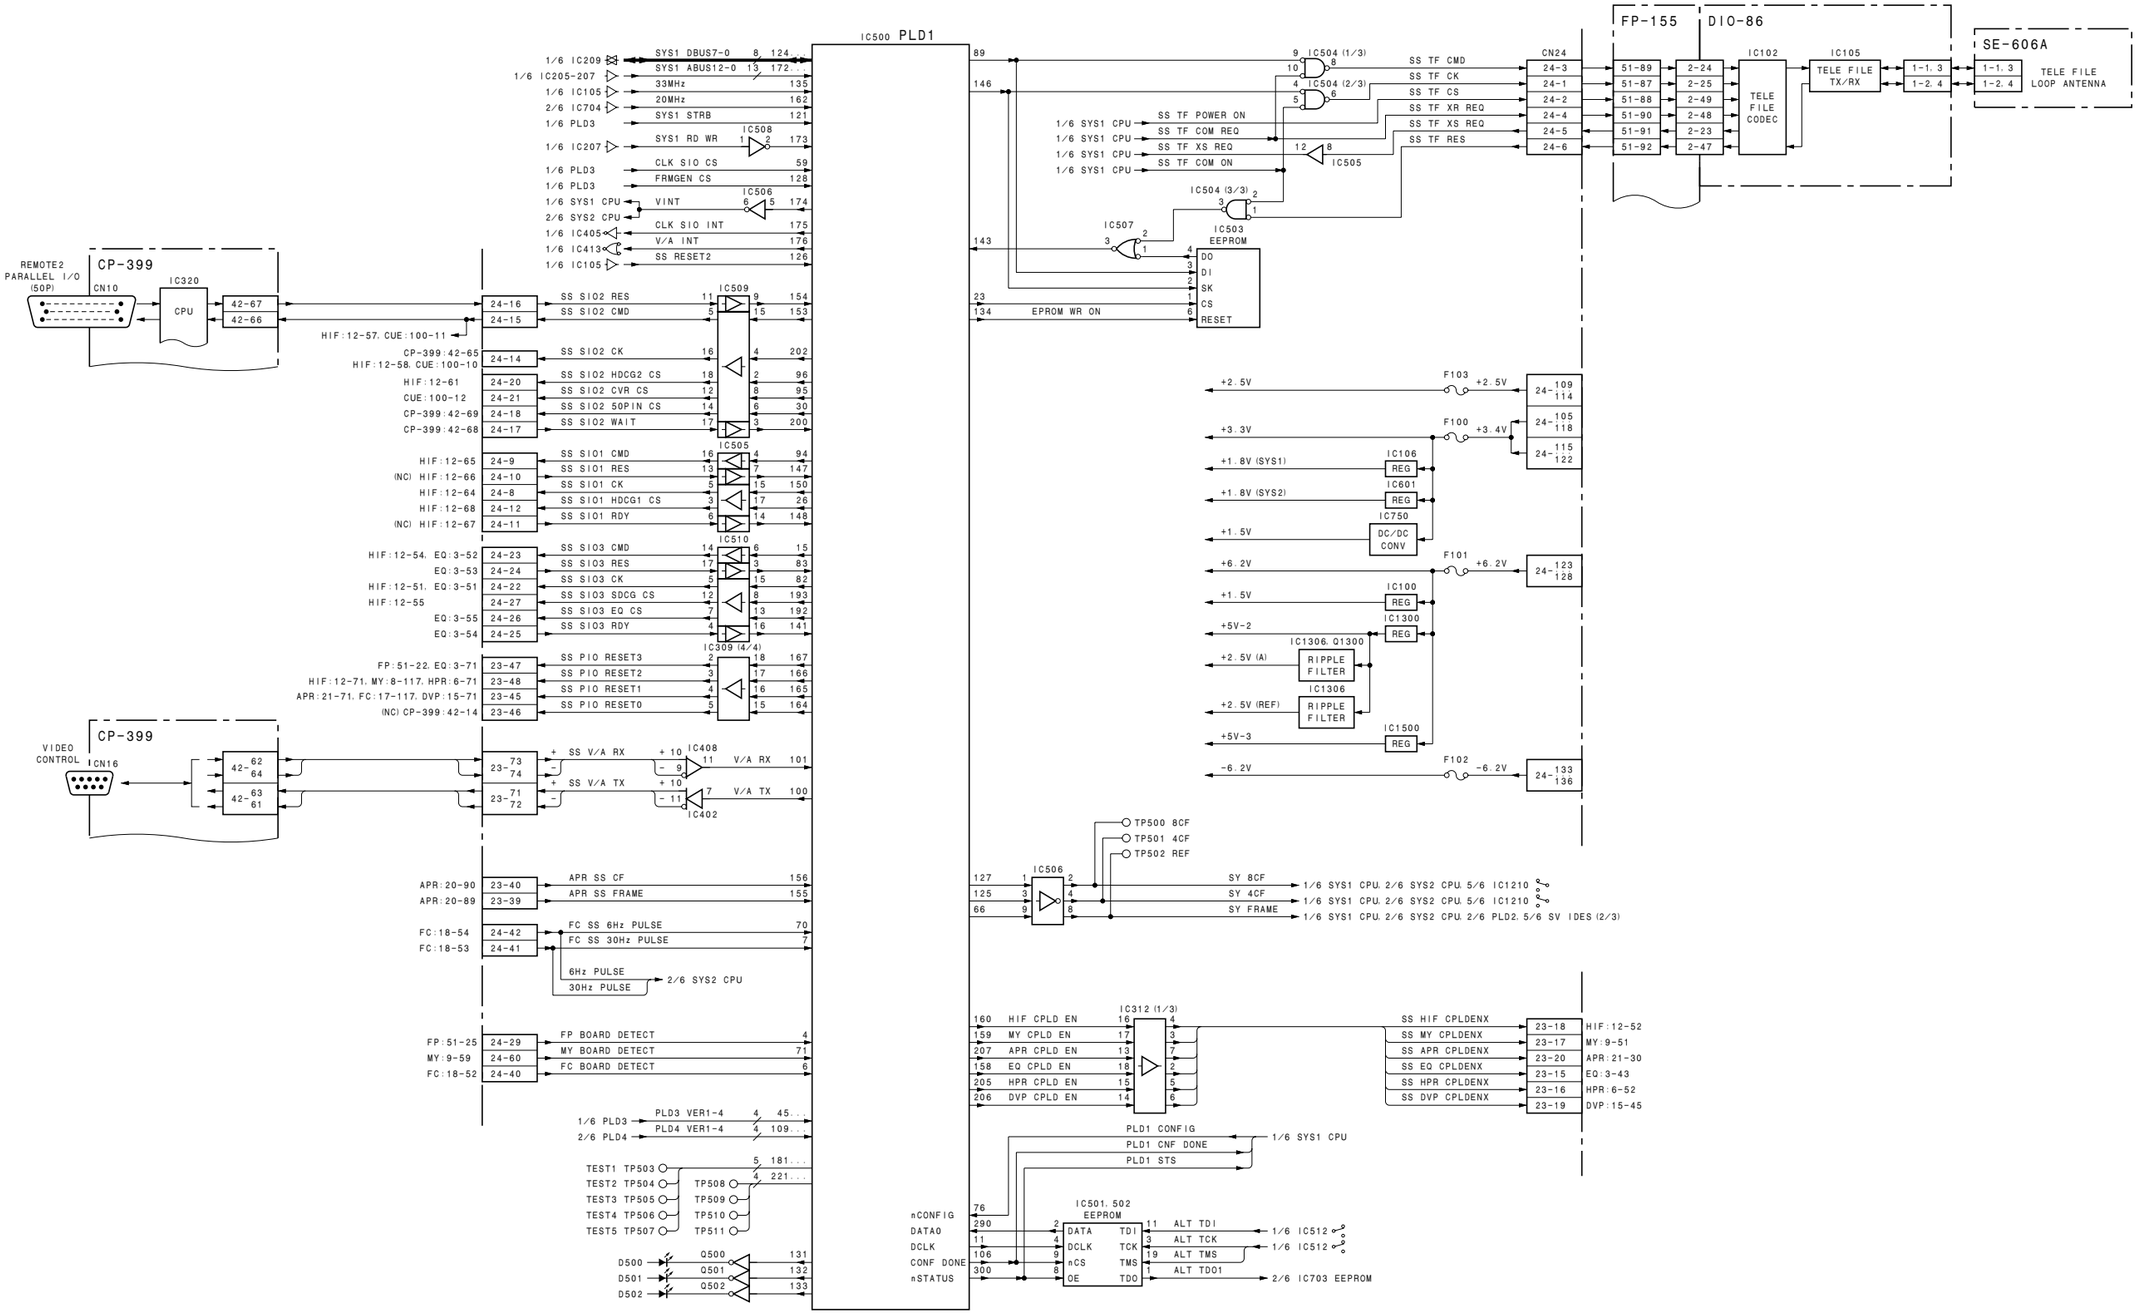
IC500 PLD1
REMOTE2 PARALLEL I/O (50P)
CN10
CP-399
IC320
CPU
VIDEO CONTROL
CN16
FP-155
DIO-86
IC102
TELE FILE CODEC
IC105
TELE FILE TX/RX
SE-606A
TELE FILE LOOP ANTENNA
CN24
IC503 EEPROM
IC504 (1/3)
IC504 (2/3)
IC504 (3/3)
IC505
IC506
IC507
IC508
IC509
IC510
IC309 (4/4)
IC408
IC402
SS TF CMD
SS TF CK
SS TF CS
SS TF XR REQ
SS TF XS REQ
SS TF RES
SS TF POWER ON
SS TF COM REQ
SS TF XS REQ
SS TF COM ON
EPROM WR ON
SYS1 DBUS7-0
SYS1 ABUS12-0
33MHz
20MHz
SYS1 STRB
SYS1 RD WR
CLK SIO CS
FRMGEN CS
VINT
CLK SIO INT
V/A INT
SS RESET2
SS SIO2 RES
SS SIO2 CMD
SS SIO2 CK
SS SIO2 HDCG2 CS
SS SIO2 CVR CS
SS SIO2 50PIN CS
SS SIO2 WAIT
SS SIO1 CMD
SS SIO1 RES
SS SIO1 CK
SS SIO1 HDCG1 CS
SS SIO1 RDY
SS SIO3 CMD
SS SIO3 RES
SS SIO3 CK
SS SIO3 SDCG CS
SS SIO3 EQ CS
SS SIO3 RDY
SS PIO RESET3
SS PIO RESET2
SS PIO RESET1
SS PIO RESET0
SS V/A RX
SS V/A TX
V/A RX
V/A TX
APR SS CF
APR SS FRAME
FC SS 6Hz PULSE
FC SS 30Hz PULSE
6Hz PULSE
30Hz PULSE
2/6 SYS2 CPU
FP BOARD DETECT
MY BOARD DETECT
FC BOARD DETECT
PLD3 VER1-4
PLD4 VER1-4
TEST1 TP503
TEST2 TP504
TEST3 TP505
TEST4 TP506
TEST5 TP507
TP508
TP509
TP510
TP511
Q500
Q501
Q502
D500
D501
D502
HIF CPLD EN
MY CPLD EN
APR CPLD EN
EQ CPLD EN
HPR CPLD EN
DVP CPLD EN
IC312 (1/3)
SS HIF CPLDENX
SS MY CPLDENX
SS APR CPLDENX
SS EQ CPLDENX
SS HPR CPLDENX
SS DVP CPLDENX
PLD1 CONFIG
PLD1 CNF DONE
PLD1 STS
nCONFIG
DATA0
DCLK
CONF DONE
nSTATUS
IC501, 502 EEPROM
ALT TDI
ALT TCK
ALT TMS
ALT TDO1
TP500 8CF
TP501 4CF
TP502 REF
SY 8CF
SY 4CF
SY FRAME
+2.5V
+3.3V
+1.8V (SYS1)
+1.8V (SYS2)
+1.5V
+6.2V
+5V-2
+2.5V (A)
+2.5V (REF)
+5V-3
-6.2V
F103
F100
F101
F102
IC106
IC601
IC750
IC100
IC1300
IC1306, Q1300
IC1306
IC1500
REG
DC/DC CONV
RIPPLE FILTER

SS-102 (3/6)

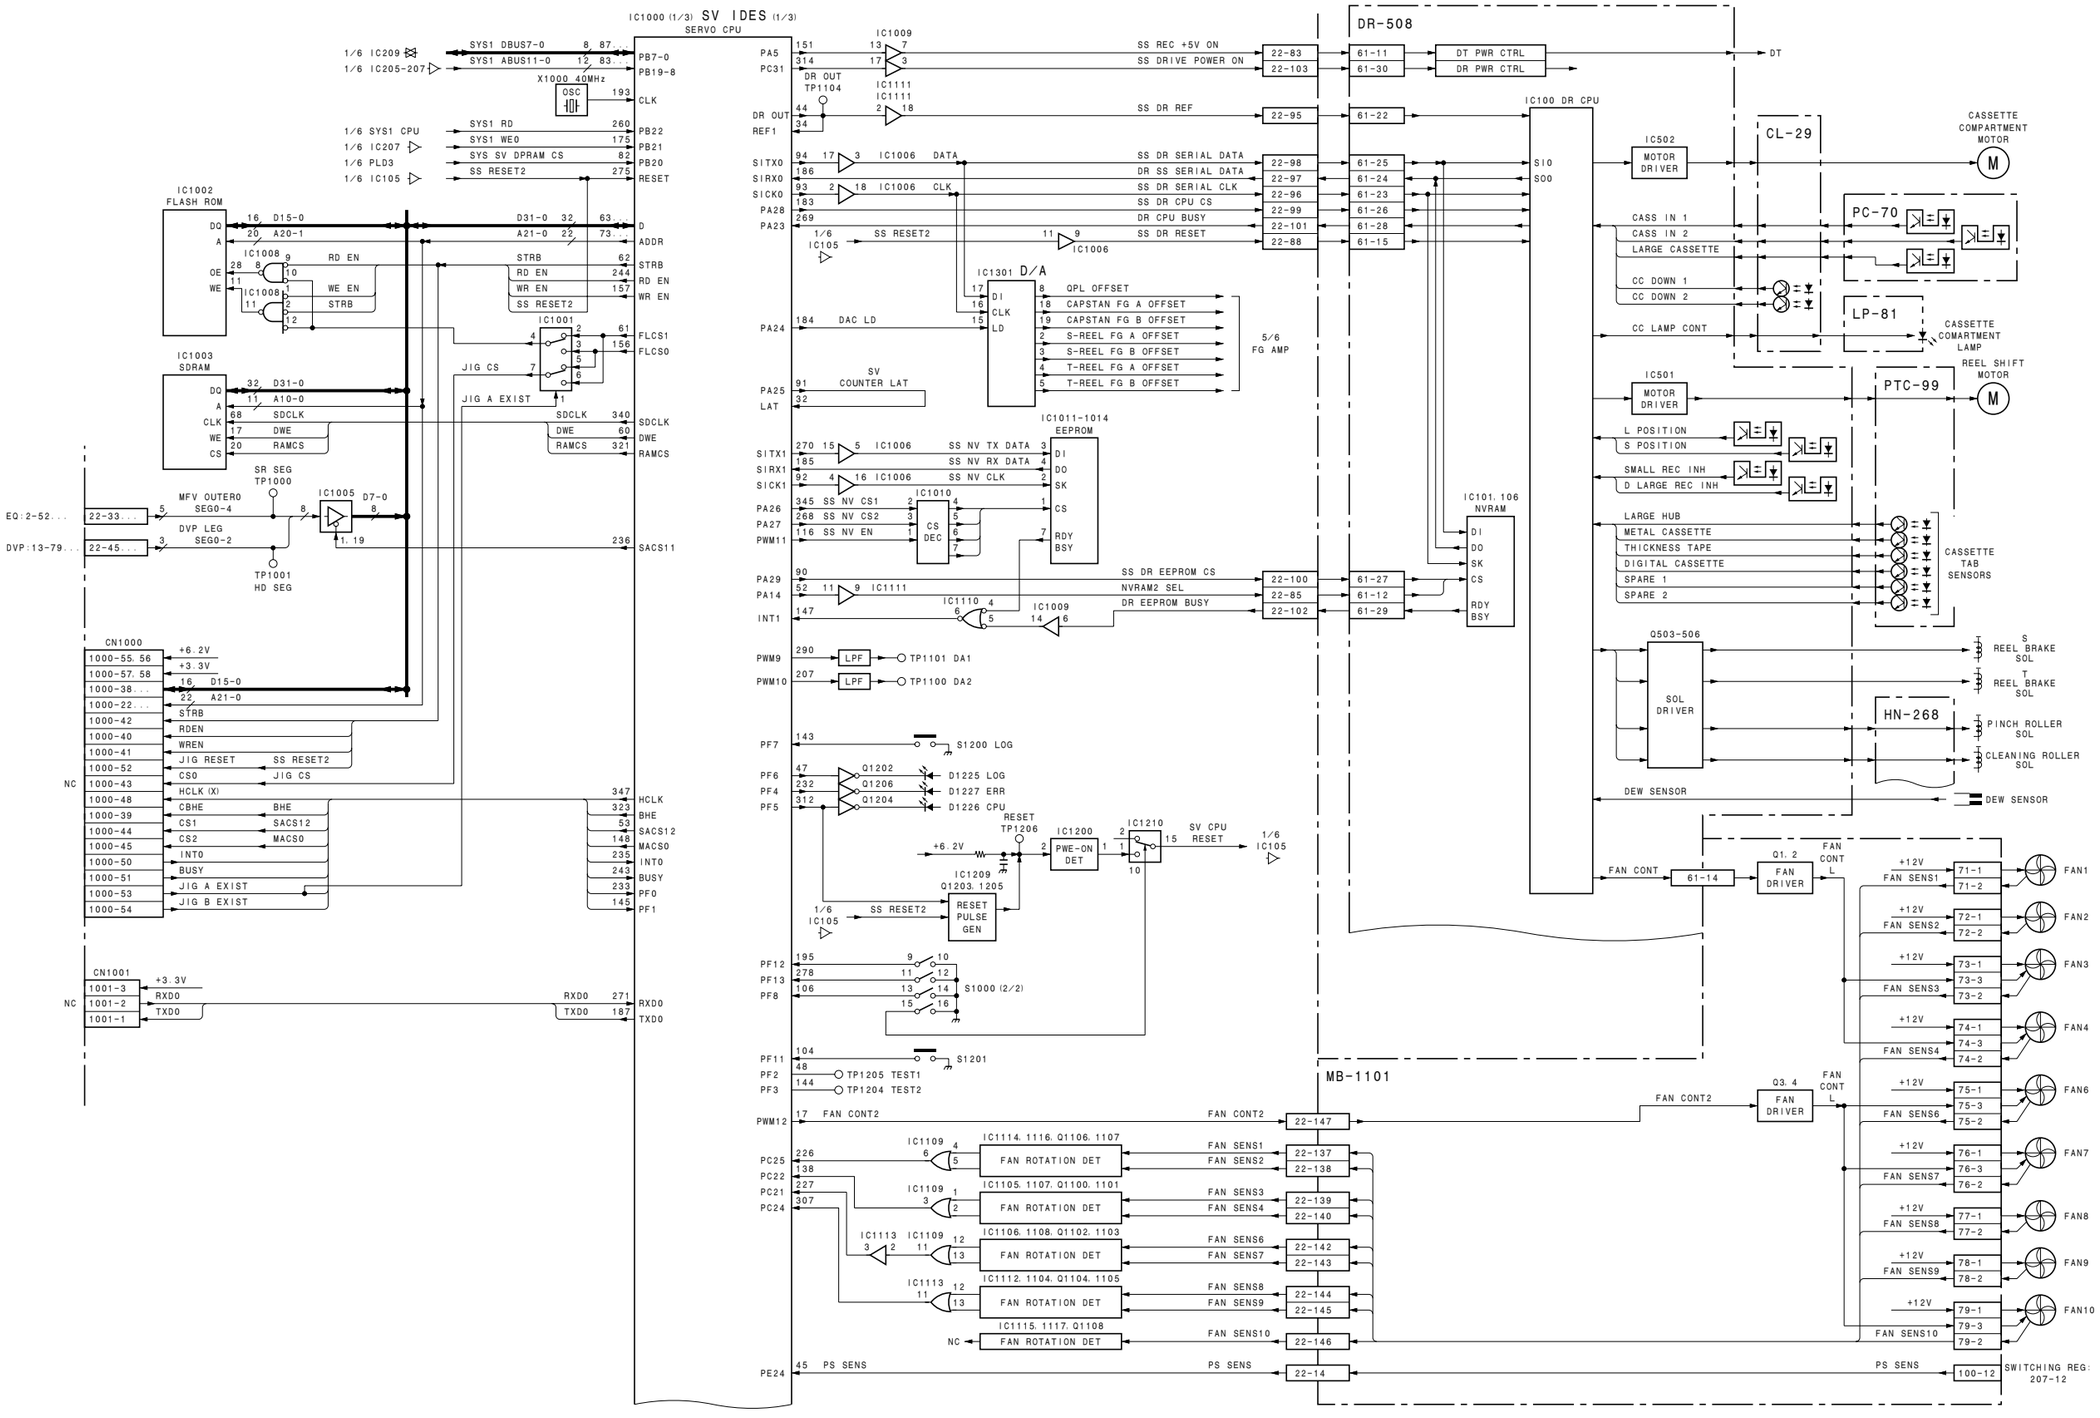

SS-102 (4/6)
MB-1101

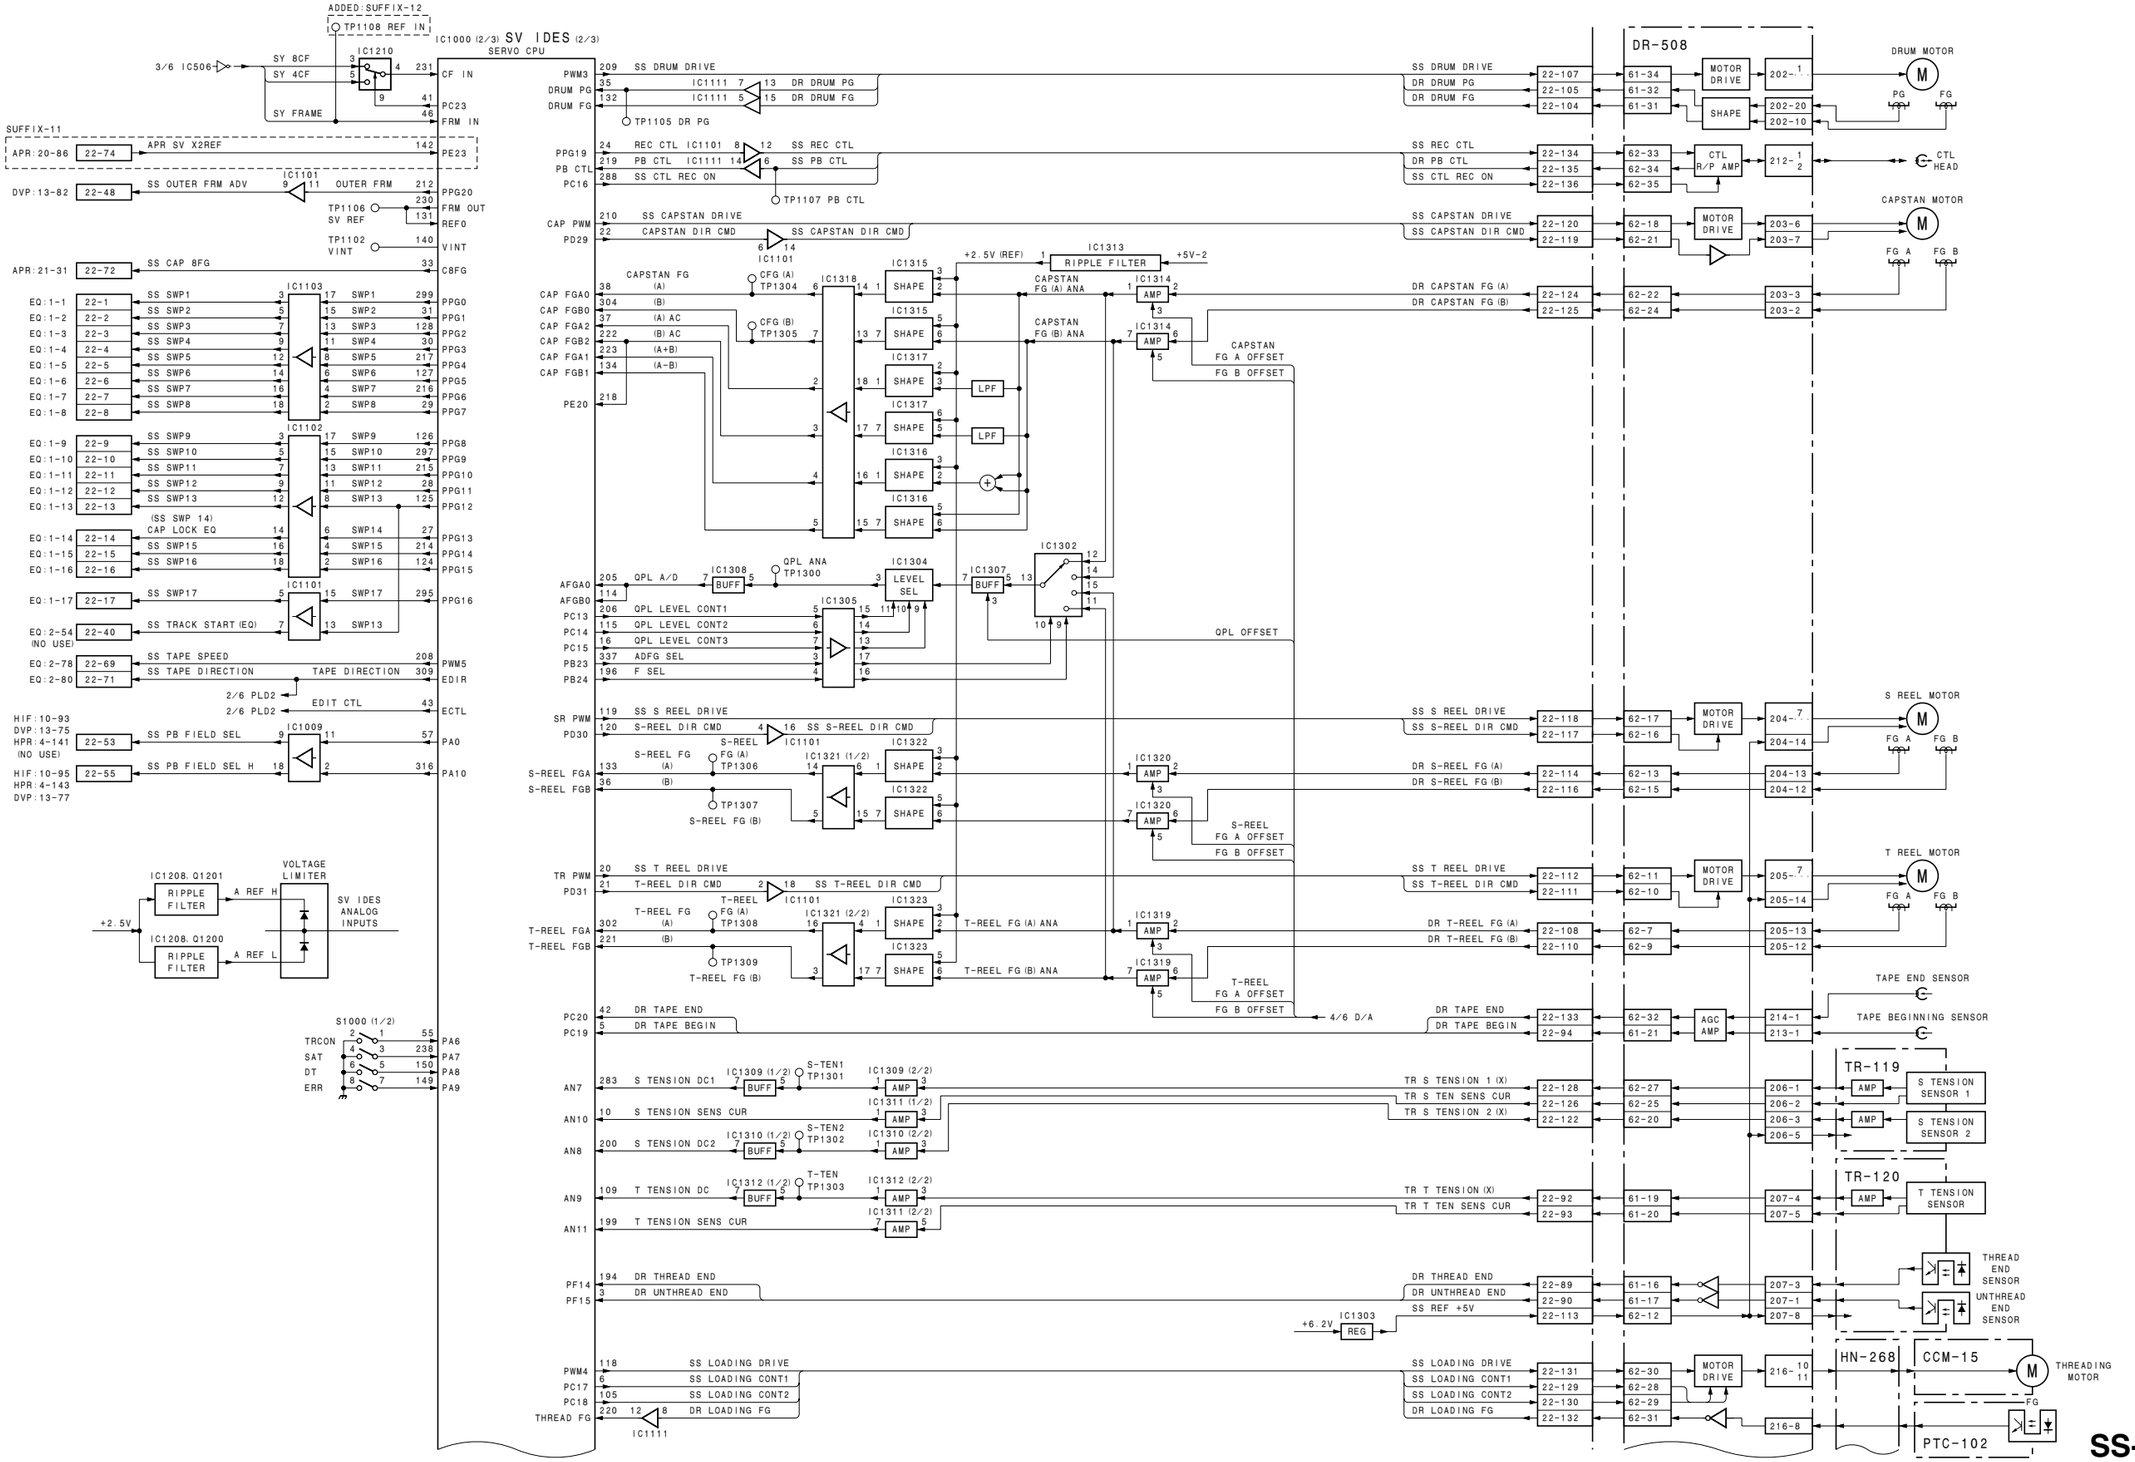
ADDED:SUFFIX-12
TP1108 REF. IN
IC1000 (2/3) SV IDES (2/3)
SERVO CPU
IC1210
3/6 IC506
SY 8CF
SY 4CF
SY FRAME
CF IN
PC23
FRM IN
SUFFIX-11
APR:20-86
APR SV X2REF
PE23
IC1101
DVP:13-82
SS OUTER FRM ADV
OUTER FRM
PPG20
TP1106
SV REF
FRM OUT
REFO
TP1102
VINT
VINT
APR:21-31
SS CAP 8FG
C8FG
IC1103
IC1102
IC1101
EQ:1-1
EQ:1-2
EQ:1-3
EQ:1-4
EQ:1-5
EQ:1-6
EQ:1-7
EQ:1-8
EQ:1-9
EQ:1-10
EQ:1-11
EQ:1-12
EQ:1-13
EQ:1-14
EQ:1-15
EQ:1-16
EQ:1-17
EQ:2-54
(NO USE)
SS SWP1
SS SWP2
SS SWP3
SS SWP4
SS SWP5
SS SWP6
SS SWP7
SS SWP8
SS SWP9
SS SWP10
SS SWP11
SS SWP12
SS SWP13
(SS SWP 14)
CAP LOCK EQ
SS SWP14
SS SWP15
SS SWP16
SS SWP17
SS TRACK START (EQ)
PPG0
PPG1
PPG2
PPG3
PPG4
PPG5
PPG6
PPG7
PPG8
PPG9
PPG10
PPG11
PPG12
PPG13
PPG14
PPG15
PPG16
EQ:2-78
EQ:2-80
SS TAPE SPEED
SS TAPE DIRECTION
TAPE DIRECTION
PWM5
EDIR
2/6 PLD2
EDIT CTL
ECTL
HIF:10-93
DVP:13-75
HPR:4-141
(NO USE)
HIF:10-95
HPR:4-143
DVP:13-77
IC1009
SS PB FIELD SEL
SS PB FIELD SEL H
PA0
PA10
IC1208.Q1201
IC1208.Q1200
RIPPLE FILTER
A REF H
A REF L
VOLTAGE LIMITER
SV IDES ANALOG INPUTS
+2.5V
S1000 (1/2)
TRCON
SAT
DT
ERR
PA6
PA7
PA8
PA9
PWM3
DRUM PG
DRUM FG
SS DRUM DRIVE
IC1111
DR DRUM PG
DR DRUM FG
TP1105 DR PG
PPG19
PB CTL
PC16
REC CTL IC1101
PB CTL IC1111
SS REC CTL
SS PB CTL
SS CTL REC ON
TP1107 PB CTL
CAP PWM
PD29
SS CAPSTAN DRIVE
CAPSTAN DIR CMD
SS CAPSTAN DIR CMD
IC1313
RIPPLE FILTER
+2.5V (REF)
+5V-2
CAPSTAN FG
CFG (A)
TP1304
CFG (B)
TP1305
CAP FGA0
CAP FGB0
CAP FGA2
CAP FGB2
CAP FGA1
CAP FGB1
PE20
(A)
(B)
(A) AC
(B) AC
(A+B)
(A-B)
IC1315
IC1317
IC1316
SHAPE
LPF
CAPSTAN FG (A) ANA
CAPSTAN FG (B) ANA
IC1314
AMP
CAPSTAN FG A OFFSET
FG B OFFSET
AFGA0
AFGB0
PC13
PC14
PC15
PB23
PB24
QPL A/D
QPL ANA
TP1300
IC1308
IC1304
IC1307
IC1302
BUFF
LEVEL SEL
QPL LEVEL CONT1
QPL LEVEL CONT2
QPL LEVEL CONT3
ADFG SEL
F SEL
IC1305
QPL OFFSET
SR PWM
PD30
SS S REEL DRIVE
S-REEL DIR CMD
SS S-REEL DIR CMD
S-REEL FG
TP1306
TP1307
S-REEL FGA
S-REEL FGB
IC1321 (1/2)
IC1322
IC1320
S-REEL FG A OFFSET
FG B OFFSET
TR PWM
PD31
SS T REEL DRIVE
T-REEL DIR CMD
SS T-REEL DIR CMD
T-REEL FG
TP1308
TP1309
T-REEL FGA
T-REEL FGB
IC1321 (2/2)
IC1323
T-REEL FG (A) ANA
T-REEL FG (B) ANA
IC1319
PC20
PC19
DR TAPE END
DR TAPE BEGIN
4/6 D/A
AN7
AN10
AN8
AN9
AN11
S TENSION DC1
S TENSION SENS CUR
S TENSION DC2
T TENSION DC
T TENSION SENS CUR
IC1309 (1/2)
IC1309 (2/2)
IC1311 (1/2)
IC1311 (2/2)
IC1310 (1/2)
IC1310 (2/2)
IC1312 (1/2)
IC1312 (2/2)
S-TEN1
TP1301
S-TEN2
TP1302
T-TEN
TP1303
PF14
PF15
DR THREAD END
DR UNTHREAD END
+6.2V
IC1303
REG
SS REF +5V
PWM4
PC17
PC18
THREAD FG
SS LOADING DRIVE
SS LOADING CONT1
SS LOADING CONT2
DR LOADING FG
IC1111
DR-508
MOTOR DRIVE
SHAPE
CTL R/P AMP
AGC AMP
DRUM MOTOR
CAPSTAN MOTOR
S REEL MOTOR
T REEL MOTOR
THREADING MOTOR
CTL HEAD
PG
FG
FG A
FG B
TAPE END SENSOR
TAPE BEGINNING SENSOR
TR-119
TR-120
S TENSION SENSOR 1
S TENSION SENSOR 2
T TENSION SENSOR
THREAD END SENSOR
UNTHREAD END SENSOR
HN-268
CCM-15
PTC-102
22-74
22-48
22-72
22-1
22-2
22-3
22-4
22-5
22-6
22-7
22-8
22-9
22-10
22-11
22-12
22-13
22-14
22-15
22-16
22-17
22-40
22-69
22-71
22-53
22-55
22-107
22-105
22-104
22-134
22-135
22-136
22-120
22-119
22-124
22-125
22-118
22-117
22-114
22-116
22-112
22-111
22-108
22-110
22-133
22-94
22-128
22-126
22-122
22-92
22-93
22-89
22-90
22-113
22-131
22-129
22-130
22-132
61-34
61-32
61-31
62-33
62-34
62-35
62-18
62-21
62-22
62-24
62-17
62-16
62-13
62-15
62-11
62-10
62-7
62-9
62-32
61-21
62-27
62-25
62-20
61-19
61-20
61-16
61-17
62-12
62-30
62-28
62-29
62-31
202-1
202-20
202-10
212-1
212-2
203-6
203-7
203-3
203-2
204-7
204-14
204-13
204-12
205-7
205-14
205-13
205-12
214-1
213-1
206-1
206-2
206-3
206-5
207-4
207-5
207-3
207-1
207-8
216-10
216-11
216-8

SS-102 (5/6)

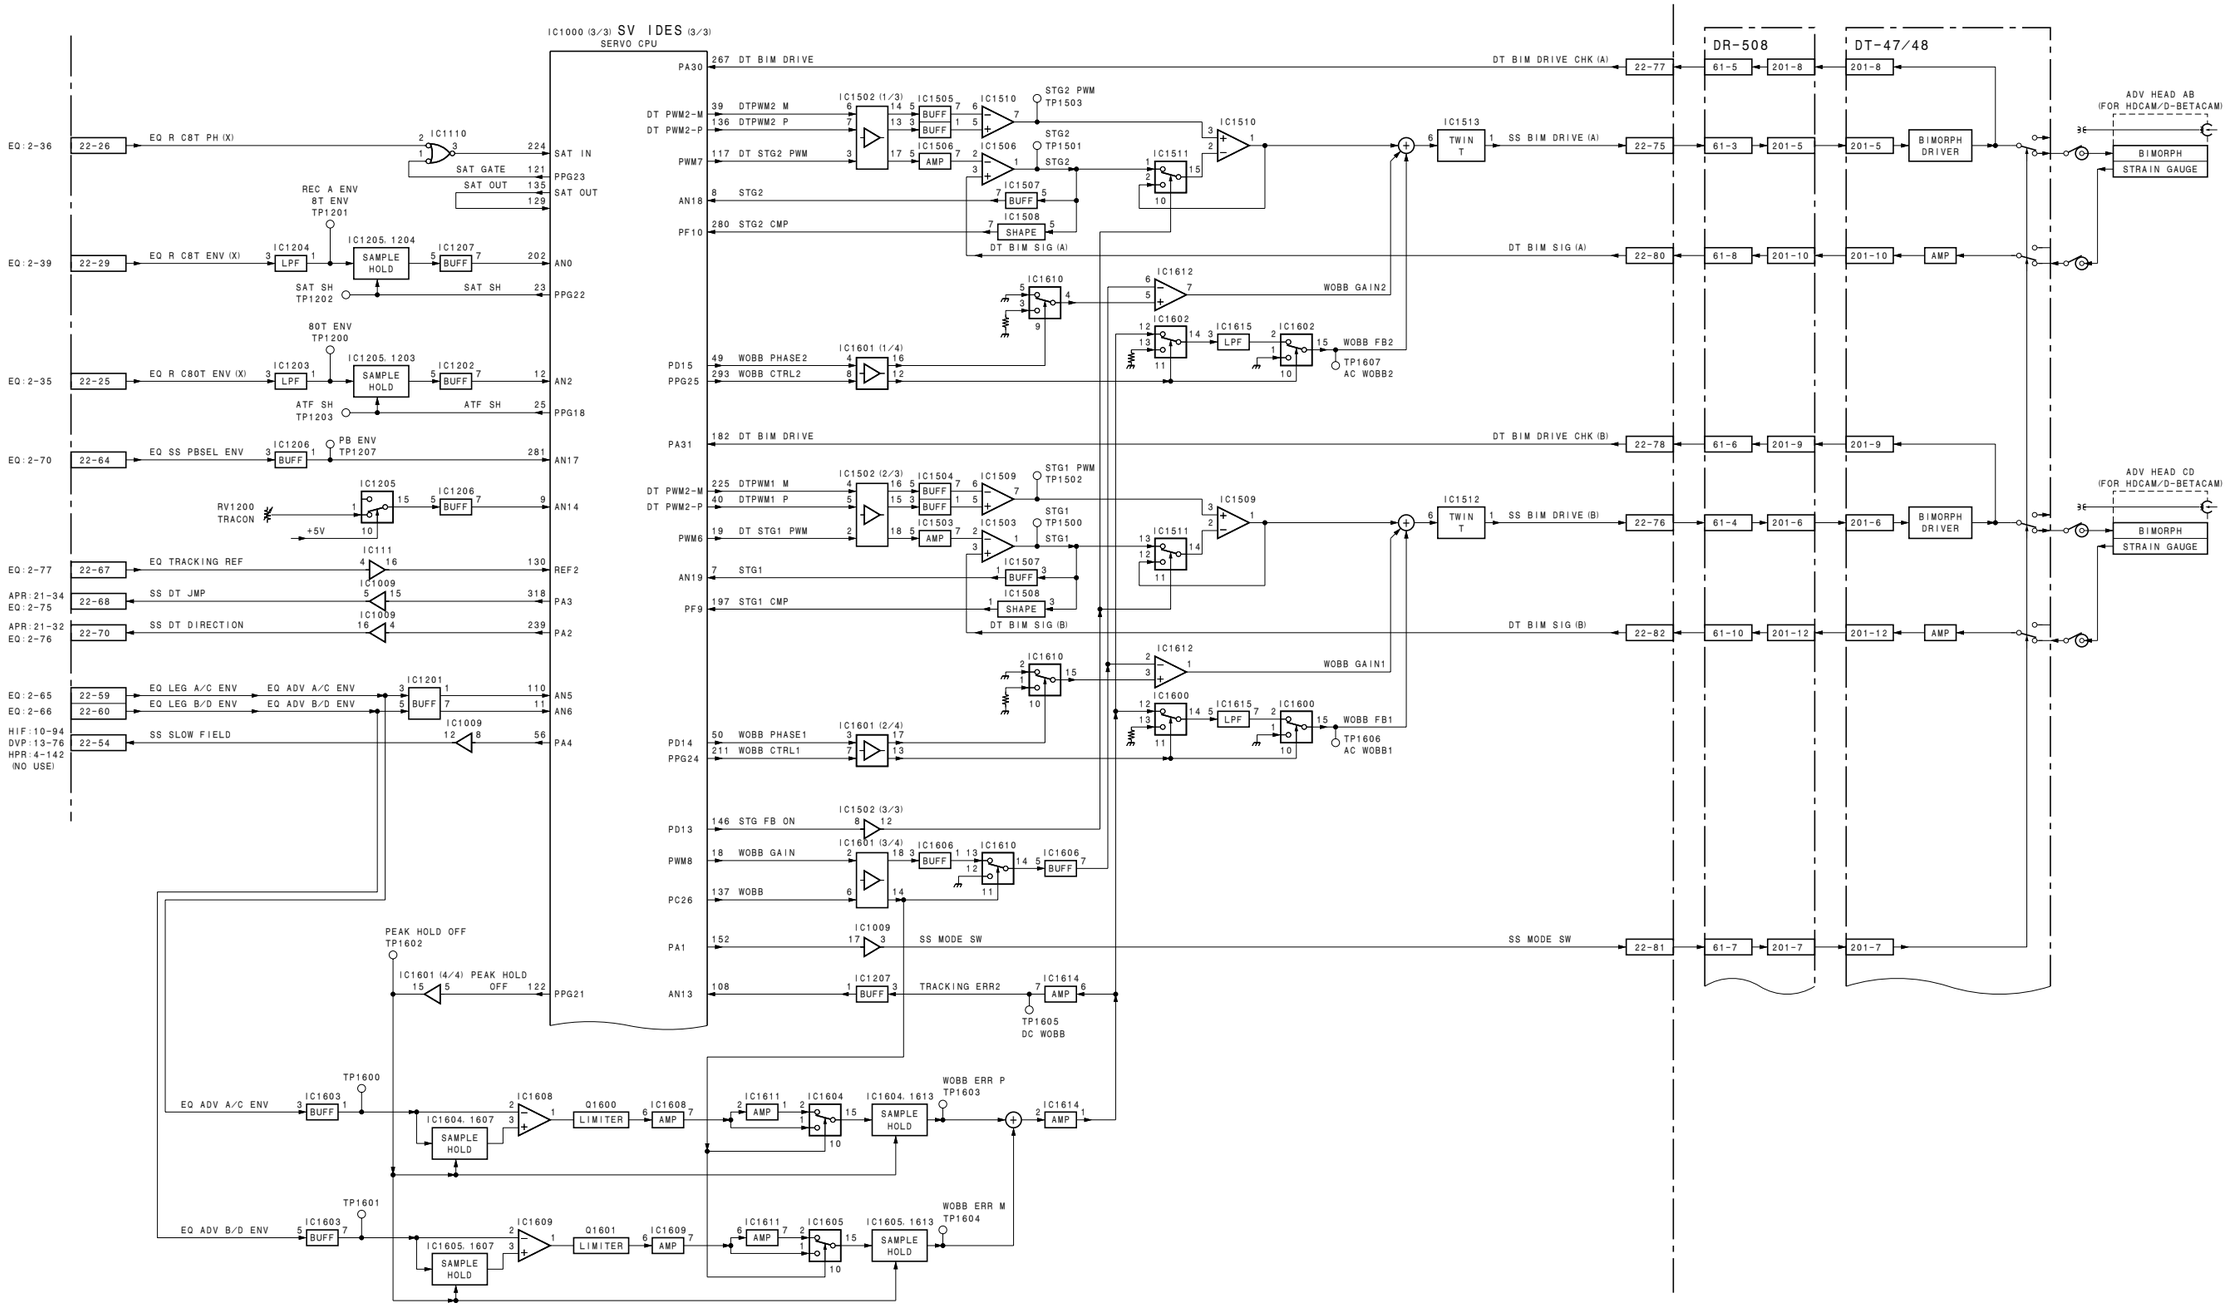
IC1000 (3/3) SV IDES (3/3)
SERVO CPU
DR-508
DT-47/48
EQ:2-36
22-26
EQ R C8T PH (X)
IC1110
SAT GATE
SAT OUT
SAT IN
PPG23
SAT OUT
REC A ENV
8T ENV
TP1201
EQ:2-39
22-29
EQ R C8T ENV (X)
IC1204
LPF
IC1205. 1204
SAMPLE HOLD
IC1207
BUFF
AN0
SAT SH
TP1202
SAT SH
PPG22
80T ENV
TP1200
EQ:2-35
22-25
EQ R C80T ENV (X)
IC1203
IC1205. 1203
IC1202
AN2
ATF SH
TP1203
ATF SH
PPG18
EQ:2-70
22-64
EQ SS PBSEL ENV
IC1206
PB ENV
TP1207
AN17
RV1200
TRACON
+5V
IC1205
IC1206
AN14
EQ:2-77
22-67
EQ TRACKING REF
IC111
REF2
APR:21-34
EQ:2-75
22-68
SS DT JMP
IC1009
PA3
APR:21-32
EQ:2-76
22-70
SS DT DIRECTION
PA2
EQ:2-65
22-59
EQ LEG A/C ENV
EQ ADV A/C ENV
IC1201
AN5
EQ:2-66
22-60
EQ LEG B/D ENV
EQ ADV B/D ENV
AN6
HIF:10-94
DVP:13-76
HPR:4-142
(NO USE)
22-54
SS SLOW FIELD
PA4
PA30
267 DT BIM DRIVE
DT BIM DRIVE CHK (A)
22-77
DT PWM2-M
DT PWM2-P
39 DTPWM2 M
136 DTPWM2 P
IC1502 (1/3)
IC1505
IC1510
STG2 PWM
TP1503
PWM7
117 DT STG2 PWM
IC1506
AMP
STG2
TP1501
AN18
8 STG2
IC1507
BUFF
PF10
280 STG2 CMP
IC1508
SHAPE
DT BIM SIG (A)
IC1511
IC1513
TWIN T
SS BIM DRIVE (A)
22-75
DT BIM SIG (A)
22-80
IC1610
IC1612
WOBB GAIN2
PD15
49 WOBB PHASE2
IC1601 (1/4)
IC1602
IC1615
LPF
WOBB FB2
TP1607
AC WOBB2
PPG25
293 WOBB CTRL2
PA31
182 DT BIM DRIVE
DT BIM DRIVE CHK (B)
22-78
DT PWM2-M
DT PWM2-P
225 DTPWM1 M
40 DTPWM1 P
IC1502 (2/3)
IC1504
IC1509
STG1 PWM
TP1502
PWM6
19 DT STG1 PWM
IC1503
STG1
TP1500
AN19
7 STG1
IC1507
BUFF
PF9
197 STG1 CMP
IC1508
SHAPE
DT BIM SIG (B)
IC1511
IC1512
TWIN T
SS BIM DRIVE (B)
22-76
DT BIM SIG (B)
22-82
IC1610
IC1612
WOBB GAIN1
PD14
50 WOBB PHASE1
IC1601 (2/4)
IC1600
IC1615
LPF
WOBB FB1
TP1606
AC WOBB1
PPG24
211 WOBB CTRL1
PD13
146 STG FB ON
IC1502 (3/3)
IC1601 (3/4)
IC1606
BUFF
IC1610
PWM8
18 WOBB GAIN
PC26
137 WOBB
PA1
152
IC1009
SS MODE SW
22-81
PEAK HOLD OFF
TP1602
IC1601 (4/4) PEAK HOLD
OFF
PPG21
AN13
108
IC1207
TRACKING ERR2
IC1614
AMP
TP1605
DC WOBB
TP1600
EQ ADV A/C ENV
IC1603
IC1608
IC1604. 1607
SAMPLE HOLD
Q1600
LIMITER
IC1611
IC1604
IC1604. 1613
WOBB ERR P
TP1603
TP1601
EQ ADV B/D ENV
IC1609
IC1605. 1607
Q1601
IC1605
IC1605. 1613
WOBB ERR M
TP1604
ADV HEAD AB
(FOR HDCAM/D-BETACAM)
ADV HEAD CD
(FOR HDCAM/D-BETACAM)
BIMORPH
STRAIN GAUGE
BIMORPH DRIVER

SS-102 (6/6)

Section 4
Board Layouts

Index

Board name		Page
AE-31H	SUFFIX: -22	4-2
	SUFFIX: -25	4-3
APR-81		4-5
APR-91		4-11
CCM-15		∗1
CL-29		4-16
CP-393		4-17
CP-397		4-20
CP-398		4-21
CP-399		4-22
CP-405		4-23
CUE-13		4-27
DLP-27 (HKSR-5803HQ)		∗1
DIO-86		4-29
DR-508		4-30
DT-47		4-32
DT-48		4-33
DVP-43 (HKSR-5802)	SUFFIX: -11	4-78
	SUFFIX: -12	4-78 (a)
EQ-102	SUFFIX: -11	4-34
	SUFFIX: -12	4-34 (a)
EQ-109		4-38
FC-91 (HKSR-5001)		∗2
FC-111 (HKSR-5001)		∗2
FL-350		4-43
FP-155		4-44
FP-163		4-45
HIF-46	SUFFIX: -11	4-46
	SUFFIX: -12	4-46 (a)
HIF-56	SUFFIX: -11	4-50
	SUFFIX: -12	4-50 (a)
HN-268		∗1
HP-135		4-54
HPR-22	SUFFIX: -11	4-55
	SUFFIX: -12	4-55 (a)
HPR-35		4-58
IF-1071 (HKSR-5804)		4-83
KY-526G		4-62
KY-527		4-64
LED-455		4-66
LP-81		4-67
MB-1101		4-68
MY-115 (HKSR-5804)		4-84
PC-70		4-71
PTC-99		∗1
PTC-102		∗1
SE-606A		∗1
SS-102	SUFFIX: -11	4-72
	SUFFIX: -12	4-72 (a)
	SUFFIX: -13	4-72 (b)
SQ-20 (HKSR-5803SQ)		∗1
SWC-46		4-76
TC-104A		4-76
TC-112A		4-77
TR-119		∗1
TR-120		∗1
TX-96 (HKSR-5001)		∗1
TX-127 (HKSR-5001)		∗1

∗1: The board Layout of this board is not described in this manual.
∗2: The board Layout of this board is not described in this manual. Refer to SRW-5000/5500 Maintenance Manual.

AE-31H (1-677-287-22)

C100	*E2	C703	A3
C101	E1	C704	*B2
C102	E1	C705	*B3
C103	E1	C706	*B2
C104	E1	C707	*B3
C106	E2	C708	A2
C107	E2	C709	A3
C108	C1	C800	C5
C109	D2	C801	C4
C110	C1	C804	*D4
C111	D1	C805	*F2
C112	D2	C852	B5
C113	D2	C853	B1
C114	D2	C855	A5
C115	D1	C856	B3
C116	*C2	C860	*D4
C117	D1	C863	*A5
C118	D1	C864	C4
C119	D1	C865	C4
C120	D1	C866	C4
C121	C1	C867	C4
C122	C1	C868	C4
C123	C1	C869	C4
C124	C1	C870	B5
C125	C1	C871	B1
C126	C1	C872	A5
C127	*C4	C873	B3
C128	*D4		
C200	*D3	CN100	F2
C201	*E3	CN200	F3
C202	*E3	CN600	C6
C203	*E3	CN800	A2
C204	E3		
C205	E3	D400	D4
C207	E3	D500	*F1
C208	E3	D501	*F1
C209	D3	D800	C3
C210	D3	D801	C3
C211	D3	D802	C3
C212	D3	D850	*B5
C213	D3	D851	*B3
C214	D3		
C215	D3	E100	E3
C216	D3	E500	F4
C217	*C3	E600	C6
C218	D2		
C219	D2	IC100	*E2
C220	D2	IC102	*D1
C221	D2	IC103	*C1
C222	C2	IC104	*C1
C223	C2	IC105	C4
C224	C2	IC106	D4
C225	C3	IC200	*E3
C226	C2	IC201	*D2
C227	C3	IC202	*C2
C228	E4	IC203	*C2
C300	B4	IC300	*B4
C301	C4	IC301	*B4
C302	C3	IC400	*C5
C303	B4	IC401	*C5
C304	B3	IC500	*F2
C400	*B5	IC600	A6
C401	C6	IC700	*B2
C402	C5	IC701	*A2
C403	C5	IC702	*A3
C404	C5	IC854	B5
C405	B5	IC855	B2
C406	C5	IC857	D4
C407	D4	IC858	C4
C408	E4	IC859	C4
C409	*E3	IC860	C4
C410	F4	IC861	C4
C500	F2	IC862	C4
C501	*F1	IC863	C4
C502	F1		
C503	*F2	L500	F2
C504	*F2	L600	A6
C505	F3	L850	B4
C506	*F3	L851	B1
C507	F3		
C600	A5	LV400	E4
C601	*A5	LV600	B6
C602	*A5		
C603	A6	PS850	B4
C604	B6	PS851	A1
C605	B6	PS852	A4
C606	*A6		
C607	*A6	Q100	*E1
C608	A6	Q101	*D2
C700	B3	Q102	*D2
C701	B3	Q103	*D2
C702	A2	Q104	*D2

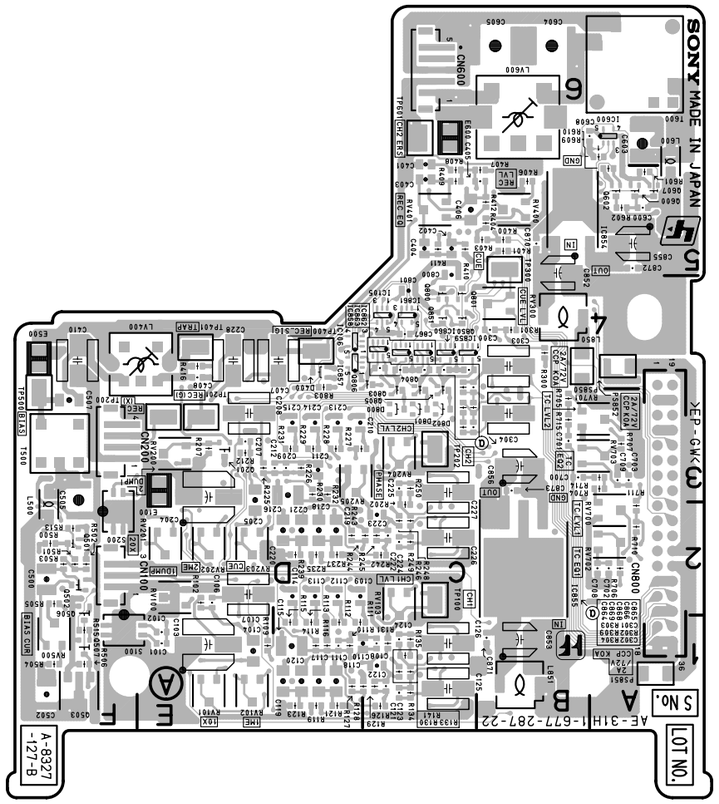

AE-31H -A SIDE-
SUFFIX: -22

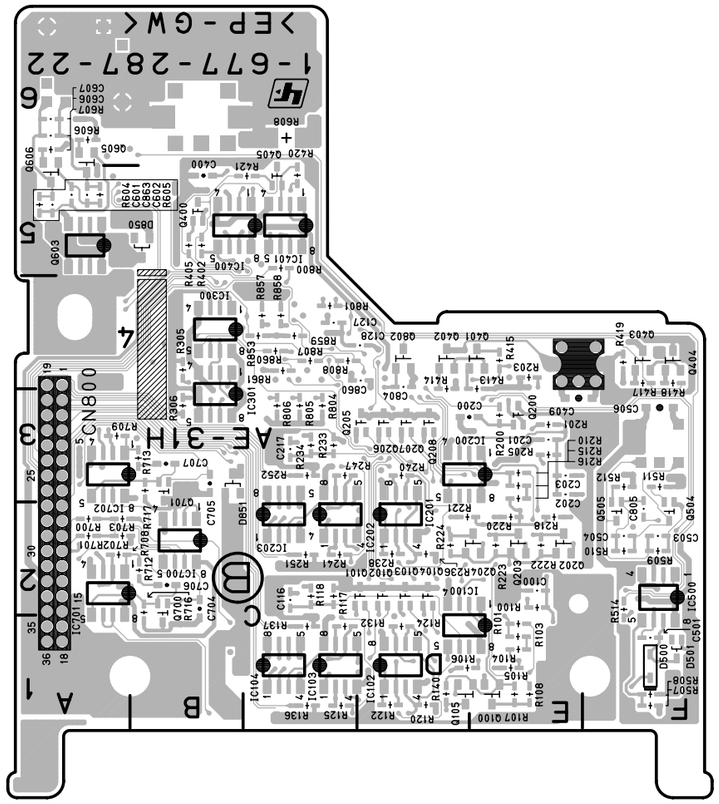

AE-31H -B SIDE-
SUFFIX: -22

Q105	*D1	R220	*E2	R704	A3
Q200	*E3	R221	*D2	R705	B3
Q201	E3	R222	*E2	R706	A2
Q202	*E2	R223	*E2	R707	A3
Q203	*E2	R224	*D2	R708	*A2
Q204	*E2	R225	E3	R709	*A3
Q205	*D3	R226	D3	R710	A2
Q206	*D3	R227	D3	R711	A2
Q207	*D3	R228	D3	R712	*B2
Q208	*D3	R229	D3	R713	*B3
Q400	*B5	R230	D3	R714	A3
Q401	*E4	R231	D3	R715	B3
Q402	*D4	R232	D3	R716	*B2
Q403	*F4	R233	*C3	R717	*B3
Q404	*F4	R234	*C3	R800	*C5
Q405	*C5	R235	D2	R801	*C4
Q501	F2	R236	*D2	R803	D4
Q502	F2	R237	D2	R804	*C3
Q503	F1	R238	*D2	R805	*C3
Q504	*F2	R239	D2	R806	*C3
Q505	*F2	R240	*D3	R807	*C4
Q506	F2	R241	*C2	R808	*C4
Q507	F1	R242	C2	R853	*C4
Q600	A5	R243	D2	R857	*C4
Q602	A5	R244	C2	R858	*C4
Q603	*A5	R245	C2	R859	*C4
Q605	*A6	R246	C2	R860	*C4
Q606	*A5	R247	*C3	R861	*C4
Q607	A5	R248	C2		
Q700	*B2	R249	C2	RV100	E2
Q701	*B3	R250	C3	RV101	E1
Q800	C4	R251	*C2	RV102	E1
Q801	C4	R252	*C3	RV103	C2
Q802	*D4	R300	B4	RV200	E3
Q803	C3	R301	B4	RV201	E2
Q804	C3	R302	C3	RV202	E2
Q805	C3	R303	C4	RV203	E2
Q806	C4	R304	C3	RV204	C3
Q850	C4	R305	*B4	RV205	D3
Q851	C4	R306	*B3	RV300	B4
		R309	C3	RV400	B5
R100	*E2	R400	B5	RV401	C5
R101	*E1	R401	B5	RV500	F1
R102	E2	R402	*B5	RV700	A2
R103	*E1	R403	B5	RV701	A3
R104	*E1	R404	B5	RV702	A2
R105	*E1	R405	*B5	RV703	A3
R106	*D1	R406	B5		
R107	*E1	R407	B5	S100	F1
R108	*E1	R408	C5	S200	F2
R109	E1	R409	C5		
R110	D1	R410	C5	T500	F3
R111	D1	R411	C5	T600	A6
R112	D1	R412	B5		
R113	D1	R413	*E3	TP100	C2
R114	D1	R414	*D3	TP200	E3
R115	D1	R415	*E4	TP201	E3
R116	D1	R416	E4	TP202	C3
R117	*C2	R417	*F4	TP300	B5
R118	*C2	R418	*F4	TP400	D4
R119	D1	R419	*F4	TP401	E4
R120	*D1	R420	*C5	TP500	F3
R121	D1	R421	*C5	TP601	C6
R122	*D1	R500	F2		
R123	D1	R501	F2	*:B SIDE	
R124	*D1	R502	F2		
R125	*C1	R503	F2		
R126	C1	R504	F1		
R127	D1	R505	F2		
R128	C1	R506	F1		
R129	C1	R507	*F1		
R130	C1	R508	*F1		
R131	C1	R509	*F2		
R132	*C1	R510	*F2		
R133	C1	R511	*F3		
R134	C1	R512	*F3		
R135	C1	R513	F2		
R136	*C1	R514	*F2		
R137	*C1	R515	F1		
R140	*D1	R601	A5		
R141	C1	R602	A5		
R200	*E3	R604	*A5		
R201	*E3	R605	*A5		
R202	C2	R606	*A6		
R203	*E4	R607	*A6		
R205	*E3	R608	*C6		
R207	E3	R609	A5		
R210	*E3	R610	A6		
R212	E3	R700	*A2		
R215	*E3	R701	*A2		
R216	*E3	R702	*A2		
R218	*E2	R703	*A2		

AE-31H (1-677-287-25)

C100	*E2	C606	*A6
C101	E1	C607	*A6
C102	E1	C608	*A6
C103	E1	C609	A5
C104	E1	C610	A5
C106	E2	C611	A5
C107	E2	C700	B3
C108	C1	C702	A2
C109	D2	C703	A3
C110	C1	C704	*B2
C112	D2	C705	*B3
C113	D2	C706	*B2
C114	D2	C707	*B3
C115	D1	C710	*B2
C116	*C2	C711	*B2
C117	D1	C800	C4
C118	D1	C801	C4
C119	D1	C804	*D4
C120	D1	C805	*F2
C121	C1	C852	B5
C122	C1	C853	B1
C123	C1	C855	A5
C124	C1	C856	B3
C125	C1	C863	*A5
C126	C1	C864	C4
C128	*D4	C870	B5
C129	*E1	C871	B1
C130	*E2	C872	A5
C201	*E3	C873	B3
C202	*E3	C877	B2
C203	*E3		
C204	E3	CN100	F2
C205	E3	CN200	F3
C207	E3	CN600	C6
C208	E3	CN800	A4
C209	D3		
C210	D3	D400	D4
C211	D3	D500	*F1
C213	D3	D501	F1
C214	D3	D502	F2
C215	D3	D601	*A6
C216	D3	D602	A5
C217	*C3	D603	*A5
C218	D2	D800	C3
C219	D2	D801	C3
C220	D2	D802	C3
C221	D2	D850	*B5
C222	C2	D851	*B3
C223	C2	D852	B2
C224	C2		
C225	C3	E100	E3
C226	C2	E500	F4
C227	C3	E600	C6
C228	E4		
C229	*E3	IC100	*E2
C230	*E3	IC102	*D1
C300	B4	IC103	*C1
C301	C4	IC104	*C1
C302	C3	IC105	C4
C303	B4	IC106	D4
C304	B3	IC200	*E3
C305	B3	IC201	*D2
C306	*B4	IC202	*C2
C400	*B5	IC203	*C2
C401	C5	IC300	*B4
C402	C5	IC301	*B4
C403	C5	IC400	*C5
C404	C5	IC401	*C5
C405	B5	IC402	C5
C406	C5	IC500	*F2
C407	D4	IC501	F2
C408	E4	IC601	A6
C409	*E3	IC602	*A5
C410	F4	IC700	*B2
C411	*C5	IC701	*A2
C412	*C5	IC702	*A3
C413	*B5	IC854	B5
C414	*B5	IC855	B2
C501	*F1	IC858	C4
C502	F1	IC859	C4
C503	*F2	IC861	C4
C504	*F2	IC862	C4
C505	F3	IC863	B2
C506	*F3		
C507	F3	L500	F2
C508	F2	L600	A5
C509	F2	L850	B4
C601	*A5	L851	B1
C602	*A5		
C603	A6	LV400	E4
C604	B6	LV600	B6
C605	B6		

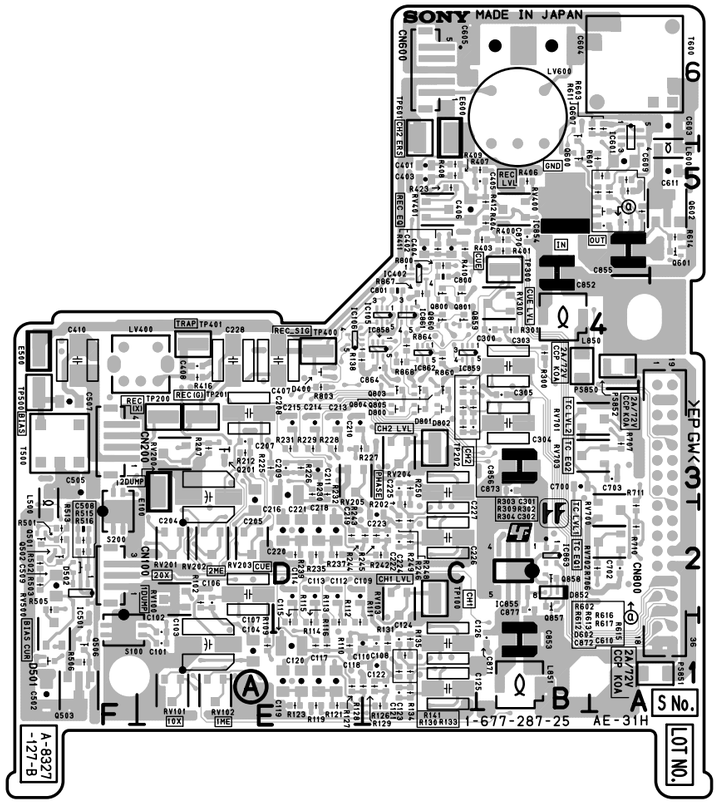

AE-31H -A SIDE-
SUFFIX: -25

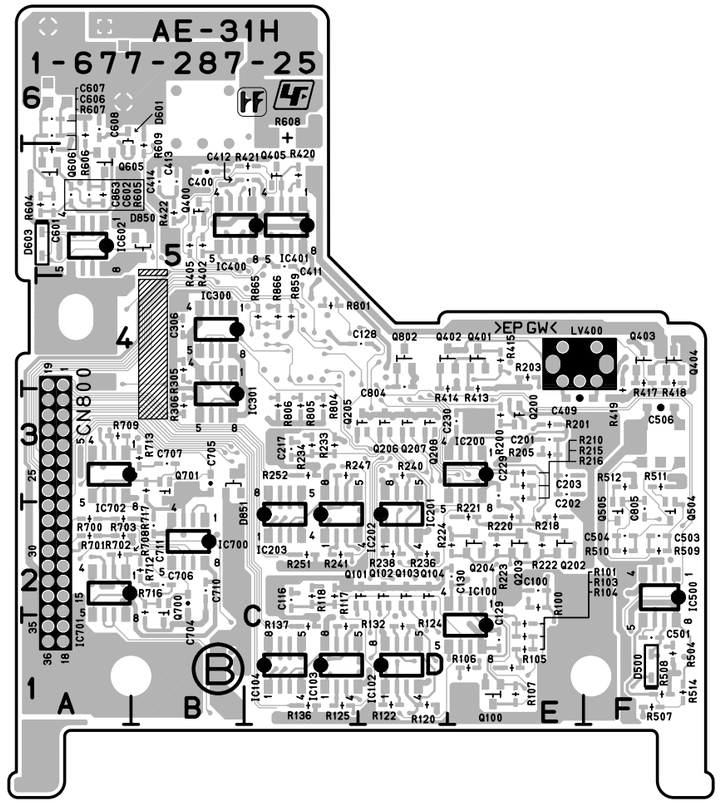

AE-31H -B SIDE-
SUFFIX: -25

PS850	B4	R205	*E3
PS851	A1	R207	E3
PS852	A4	R210	*E3
		R212	E3
Q100	*E1	R215	*E3
Q101	*D2	R216	*E3
Q102	*D2	R218	*E2
Q103	*D2	R220	*E2
Q104	*D2	R221	*E2
Q200	*E3	R222	*E2
Q201	E3	R223	*E2
Q202	*E2	R224	*E2
Q203	*E2	R225	E3
Q204	*E2	R226	D3
Q205	*D3	R227	D3
Q206	*D3	R228	D3
Q207	*D3	R229	D3
Q208	*D3	R230	D3
Q400	*B5	R231	D3
Q401	*E4	R232	D3
Q402	*E4	R233	*C3
Q403	*F4	R234	*C3
Q404	*F4	R235	D2
Q405	*C5	R236	*D2
Q501	F2	R237	D2
Q502	F2	R238	*D2
Q503	F1	R239	D2
Q504	*F2	R240	*D3
Q505	*F2	R241	*C2
Q506	F1	R242	C2
Q600	B5	R243	D2
Q601	A5	R244	C2
Q602	A5	R245	C2
Q605	*A5	R246	C2
Q606	*A5	R247	*C3
Q607	B6	R248	C2
Q700	*B2	R249	C2
Q701	*B3	R250	C3
Q800	C4	R251	*C2
Q801	C4	R252	*C3
Q802	*D4	R300	B4
Q803	C3	R301	B4
Q804	C3	R302	C3
Q805	C3	R303	C4
Q857	B2	R304	C3
Q858	B2	R305	*B4
Q859	C4	R306	*B3
Q860	C4	R309	C3
		R400	B5
R100	*E2	R401	B5
R101	*E1	R402	*B5
R102	E2	R403	B5
R103	*E1	R404	B5
R104	*E1	R405	*B5
R105	*E1	R406	B5
R106	*E1	R407	B5
R107	*E1	R408	C5
R109	E1	R409	C5
R110	D1	R410	C5
R111	D1	R411	C5
R112	D1	R412	B5
R113	D1	R413	*E4
R114	D1	R414	*E4
R115	D1	R415	*E4
R116	D1	R416	E4
R117	*C2	R417	*F4
R118	*C2	R418	*F4
R119	D1	R419	*F3
R120	*D1	R420	*C5
R121	D1	R421	*C5
R122	*D1	R422	*B5
R123	D1	R423	C5
R124	*D1	R501	F2
R125	*C1	R502	F2
R126	C1	R503	F2
R127	D1	R504	*F1
R128	C1	R505	F2
R129	C1	R506	F1
R130	C1	R507	*F1
R131	C1	R508	*F1
R132	*C1	R509	*F2
R133	C1	R510	*F2
R134	C1	R511	*F3
R135	C1	R512	*F3
R136	*C1	R513	F2
R137	*C1	R514	*F1
R138	D4	R515	F2
R141	C1	R516	F2
R200	*E3	R601	A5
R201	*E3	R602	A5
R202	C2	R603	A6
R203	*E4	R604	*A5
R205	*E3	R605	*A5
R206	B5	R606	*A6
R207	E3	R607	*A5
R210	*E3	R608	*C6
R212	E3	R609	*B5
R215	*E3	R611	A6
R216	*E3	R612	A5
R218	*E2	R613	A5
R220	*E2	R614	A5
R221	*E2	R615	A5
R222	*E2	R616	A5
R223	*E2	R617	A5
R224	*E2	R700	*A2
R225	E3	R701	*A2
R226	D3	R702	*A2
R227	D3	R703	*A2
R228	D3	R706	A2
R229	D3	R707	A3
R230	D3	R708	*A2
R231	D3	R709	*A3
R232	D3	R710	A2
R233	*C3	R711	A2
R234	*C3	R712	*B2
R235	D2	R713	*B3
R236	*D2	R716	*B2
R237	D2	R800	C5
R238	*D2	R801	*C4
R239	D2	R803	D4
R240	*D3	R804	*C3
R241	*C2	R805	*C3
R242	C2	R806	*C3
R243	D2	R859	*C4
R244	C2	R860	C4
R245	C2	R864	C4
R246	C2	R865	*C4
R247	*C3	R866	*C4
R248	C2	R867	C4
R249	C2	R868	C4
R250	C3		
R251	*C2	RV100	E2
R252	*C3	RV101	E1
		RV102	E1
		RV103	C2
		RV200	E3
		RV201	E2
		RV202	E2
		RV203	E2
		RV204	C3
		RV205	D3
		RV300	B4
		RV400	B5
		RV401	C5
		RV500	F1
		RV700	A2
		RV701	A3
		RV702	A2
		RV703	A3
		S100	F1
		S200	F2
		T500	F3
		T600	A6
		TP100	C2
		TP200	E3
		TP201	E3
		TP202	C3
		TP300	B5
		TP400	D4
		TP401	E4
		TP500	F3
		TP601	C6
		*:B SIDE	

APR-81 (1-874-863-11)

C100	H5	C1010	*G2	C1255	E1	C2204	*L4	C3025	*B4	C4203	A2	C4350	*D1	C7215	N3	C9012	*N2	CL4228	C2	E4212	B1	IC1207	G1	IC4291	*B1	L1291	E1	R501	E3	R1066	H3	R1158	*G2	R1402	F2
C101	G4	C1011	*G2	C1256	E1	C2205	*K4	C3026	K4	C4204	*A2	C4351	*D1	C7219	N3	C9013	N2	CL4229	C2	E4290	*B1	IC1208	*G1	IC4292	*B1	L1292	E1	R502	D3	R1067	H3	R1159	*G2	R1403	*G2
C102	J5	C1012	*G2	C1257	E1	C2206	*K4	C3200	K4	C4205	*B2	C4352	C1	C7220	N3	C9014	N1	CL4230	B2	E4370	D1	IC1209	K4	IC4293	*B1	L1293	F1	R503	D3	R1068	G3	R1160	*G2	R1404	F2
C104	J4	C1013	*G2	C1258	E1	C2207	*K5	C3201	K4	C4206	*C2	C4353	C1	C7222	N3	C9015	N1	CL4231	B1	E4400	*G4	IC1210	K4	IC4350	*D1	L1294	E1	R504	E3	R1069	G3	R1161	*G1	R1405	F2
C105	G5	C1014	*G2	C1259	F1	C2208	*H5	C4000	E5	C4207	*B1	C4360	*C1	C7224	N3	C9016	M1	CL4232	B1	E4401	F4	IC1211	L5	IC4351	*D1	L1295	F1	R505	E3	R1070	G4	R1162	*G2	R1406	F2
C106	H4	C1015	*G2	C1260	F1	C2209	*J5	C4001	E5	C4208	*B1	C4361	*C1	C7225	N3	C9017	N1	CL4233	B1	E4402	*F5	IC1212	K5	IC4352	C1	L1296	G1	R506	D3	R1071	G4	R1163	*G2	R1407	*G2
C107	H4	C1016	*G2	C1261	F1	C2210	*J5	C4002	E5	C4209	*B1	C4362	C1	C7229	N3	C9018	N1	CL4234	C1	E4403	*D1	IC1213	L5	IC4353	C1	L2051	J2	R507	D3	R1072	H3	R1164	*G2	R1408	F2
C110	J5	C1017	*G2	C1262	F1	C2400	N2	C4005	E5	C4210	*A1	C4363	C1	C7232	*N3	C9019	N1	CL4235	C1	E4407	*C2	IC2000	K2	IC4360	*C1	L2052	L2	R508	E3	R1073	H3	R1165	G3	R1409	F2
C111	J4	C1018	*G2	C1263	*F1	C2401	N2	C4006	E5	C4211	*A2	C4380	*D1	C7233	*N3			CL4236	C1	E4408	*D1	IC2200	*L5	IC4361	*C1	L2053	J2	R509	E3	R1074	G3	R1166	G3	R1410	F2
C200	*J2	C1019	*G2	C1264	*F1	C2402	N2	C4007	E5	C4212	*A2	C4381	*D1	C7242	P4	CL500	E3	CL4237	B2	E4450	*E1	IC2201	*K5	IC4362	C1	L2054	L2	R510	E3	R1075	G3	R1167	G3	R1411	*G2
C201	*J2	C1035	H3	C1265	*F1	C2403	N2	C4008	E5	C4213	*B2	C4382	*D1	C7243	P4	CL503	D3	CL4238	B2	E7100	N4	IC2202	J5	IC4363	C1	L2060	L3	R511	D3	R1076	G4	R1168	G3	R1412	F2
C202	*J2	C1038	H1	C1266	*F1	C2404	N2	C4009	E5	C4214	*C2	C4390	*C1	C7245	P4	CL504	E3	CL4239	B1	E7131	N3	IC2203	*L5	IC4391	B3	L2400	N2	R512	D3	R1077	G4	R1169	G3	R1413	F2
C203	J2	C1050	H3	C1267	*G1	C2405	N2	C4010	E5	C4215	*B2	C4391	*C1	C7252	N4	CL1000	F3	CL4240	B1	E7200	N4	IC2204	*K5	IC4392	D3	L2401	M2	R800	*E2	R1078	H3	R1170	G3	R1414	F2
C204	*J2	C1051	F2	C1268	*G1	C2406	N2	C4011	D4	C4216	*B1	C4392	*C1	C7253	N4	CL1001	F3	CL4241	B2	E7231	P3	IC2205	*K4	IC4401	G5	L2402	M2	R801	*E2	R1079	H3	R1171	*G2	R1415	*G2
C205	*J2	C1052	F2	C1269	*G1	C2407	N2	C4012	E5	C4217	*B1	C4393	*B1	C7255	N4	CL1002	G3	CL8000	L4	E8001	L4	IC2206	*K5	IC4402	*G5	L2403	N2	R802	*D2	R1080	G3	R1172	*G2	R1416	*G2
C206	*J2	C1053	H2	C1270	*G1	C2408	M2	C4013	F5	C4218	B1	C4394	*B1	C7290	N3	CL1003	G3			E9001	N2	IC2207	*H5	IC4403	D1	L2404	M2	R803	*D2	R1081	G3	R1173	*G2	R1417	F2
C207	*J2	C1054	H2	C1281	E1	C2409	M2	C4014	*E5	C4219	*B1	C4395	*B1	C7291	P3	CL1100	C5	CN19	M5	E9002	L1	IC2208	*J5	IC4404	D1	L2405	M2	R804	*E2	R1082	G3	R1174	*G1	R1418	F2
C208	*J3	C1055	G1	C1282	E1	C2410	M2	C4015	E5	C4220	B1	C4400	F5	C7292	N3	CL1101	C5	CN20	G5	E9003	L1	IC2209	*K5	IC4405	*D1	L4002	E5	R805	*D2	R1083	G3	R1175	H3	R1419	F2
C209	J3	C1056	H3	C1283	F1	C2411	M2	C4016	E5	C4221	*A2	C4401	*E5	C7293	P3	CL1102	C5	CN21	C5	E9004	*M1	IC2400	N2	IC4407	*D2	L4003	*E5	R806	E2	R1084	H3	R1176	*G2	R1420	*G2
C210	J3	C1060	H3	C1284	*E1	C2412	N2	C4017	*E5	C4222	*A2	C4402	*F5	C7310	L4	CL1103	C5	CN3000	*A4	E9005	N1	IC2401	N2	IC4408	G4	L4004	*E4	R807	E2	R1085	H3	R1177	*G2	R1421	*G2
C211	*H2	C1061	*F2	C1285	*F1	C2413	M2	C4018	E4	C4223	*A2	C4403	G5	C7311	M4	CL1104	C5					IC2402	M2	IC4409	G4	L4005	*D4	R808	*E2	R1086	G3	R1181	H1	R1422	F2
C212	*H2	C1062	*G2	C1286	*G1	C2414	M2	C4019	F4	C4224	*A2	C4404	*G5	C7312	*M4	CL1105	C5	D300	P1	F100	G5	IC2403	*N2	IC4410	*F5	L7095	P3	R809	*D2	R1087	G3	R1182	H1	R1423	F2
C213	*J2	C1063	*G2	C1291	E1	C2415	N2	C4020	E5	C4225	A1	C4405	G5	C7313	*M4	CL1106	C5	D301	P1	F101	G4	IC2404	*N2	IC4411	*G4	L7150	M3	R810	*E2	R1088	G3	R1183	G3	R1424	F2
C214	J2	C1064	*G2	C1292	E1	C2416	N2	C4021	E5	C4226	B2	C4406	F5	C7320	M5	CL1107	C5	D850	D3	F102	H5	IC2405	*M2	IC4412	G5	L7250	N3	R811	*D2	R1089	G3	R1184	G3	R1425	*G2
C215	*J2	C1065	*G2	C1293	F1	C2417	M2	C4022	*E5	C4227	B1	C4407	*G5	C7321	L5	CL1108	C5	D851	E2	F105	J5	IC2406	K1	IC4413	*G5	L8090	*M4	R812	*E2	R1090	H3	R1185	G3	R1426	F2
C216	*H2	C1066	*G2	C1294	E1	C2418	N2	C4023	D4	C4228	B1	C4408	G5	C7322	*M5	CL1109	M5	D1202	H1	F106	J4	IC2407	*K1	IC4414	*G5	L8091	*M3	R813	*D2	R1091	H3	R1186	G4	R1427	F2
C217	*H2	C1071	*G2	C1295	F1	C2419	N2	C4024	E4	C4229	*A1	C4409	*G5	C7323	*M5	CL1110	M5	D1203	H1	F400	A4	IC2408	L1	IC4415	*E5	L9000	M1	R1000	G3	R1092	G3	R1187	G4	R1428	F2
C218	*J2	C1072	*G2	C1296	G1	C2420	N2	C4025	F4	C4230	*A2	C4410	G5	C7350	M4	CL1111	M5	D1204	H1	F401	A4	IC2409	*L1	IC4416	*F5	L9001	*N1	R1001	G3	R1093	G3	R1188	G4	R1429	*G2
C219	*J2	C1073	*G2	C2000	*K2	C2421	N2	C4026	D4	C4231	*A2	C4411	*G5	C7351	L4	CL1112	M5	D1205	H1	F402	B3	IC2410	J1	IC4417	G5	L9002	*N1	R1002	*G2	R1094	G3	R1189	G4	R1430	*G2
C220	J1	C1074	*H2	C2001	*K2	C2422	M2	C4027	*E5	C4232	A1	C4412	G5	C7352	L4	CL1113	M5	D2200	J1	F403	B4	IC2411	*J1	IC4418	G5	L9003	M1	R1003	G3	R1095	G3	R1194	H3	R1431	*F2
C221	J2	C1075	*G2	C2002	*K2	C2423	M2	C4028	*E4	C4233	*B2	C4413	*G5	C7360	L5	CL1114	M5	D2201	J1			IC3000	J4	IC4419	G5			R1004	G3	R1096	H3	R1195	H3	R1432	*F2
C222	J3	C1076	*G2	C2003	*K2	C2424	*N2	C4029	E4	C4234	*B2	C4414	G5	C7361	M5	CL1115	M5	D4000	*E4	FB3000	C5	IC3001	*B4	IC4420	F5	Q300	P1	R1005	G3	R1097	H3	R1196	H3	R1433	*F2
C223	J1	C1085	*G2	C2004	*K2	C2425	*N2	C4030	D4	C4235	*B2	C4415	G5	C7362	M5	CL1116	M5	D4001	C4	FB4000	C4	IC3002	C5	IC4421	F5	Q301	P2	R1006	*G2	R1098	G3	R1197	G3	R1434	*G2
C300	P1	C1086	*G2	C2005	*K2	C2426	*N2	C4031	E4	C4236	*B2	C4416	G5	C7410	P4	CL1117	M5	D4090	D5	FB4200	B2	IC3003	A5	IC4422	*G5	Q302	P1	R1007	G3	R1099	G3	R1198	G3	R1435	*F2
C301	P1	C1100	F1	C2006	*K2	C2427	*N2	C4032	E4	C4237	*B1	C4417	G5	C7411	P4	CL1118	M5	D4091	E5	FB4201	*B2	IC3004	B5	IC4423	*G5	Q303	P2	R1008	G3	R1100	G3	R1199	G3	R1436	*F2
C302	P1	C1101	H1	C2007	*K2	C2428	*N2	C4033	E4	C4238	*B2	C4418	F5	C7412	*P4	CL1119	M5	D4092	D5	FB4202	A1	IC3005	A5	IC4424	*G5	Q304	P1	R1009	*G2	R1101	G3	R1200	G4	R1437	F2
C400	A4	C1110	F3	C2008	*K2	C2429	*N2	C4034	*F5	C4239	*B2	C4419	F5	C7413	*P4	CL1120	M5	D4093	E5	FB4203	*A1	IC3006	B5	IC4425	*G4	Q305	P1	R1010	G3	R1102	H3	R1201	G4	R1438	*F2
C401	A4	C1111	*F2	C2009	*K2	C2430	*N2	C4035	*E4	C4240	*B1	C4420	*G5	C7420	P5	CL1121	M5	D4200	A3	FB4204	A2	IC3007	*B4	IC4426	*G5	Q306	P1	R1011	G3	R1103	H3	R1202	G4	R1439	F2
C404	A3	C1112	*F2	C2010	*K2	C2431	*N2	C4036	D4	C4241	*B1	C4421	*G5	C7421	P5	CL1122	M5	D4201	A3	FB4205	*B1	IC3008	*B4	IC4427	*F5	Q3000	*H4	R1012	G3	R1104	G3	R1203	G4	R1440	F2
C405	B3	C1113	*G2	C2011	*K2	C2432	*M2	C4037	E4	C4242	C2	C4422	*G5	C7422	*P5	CL1123	M5	D4390	B3	FB4206	*B1	IC3009	*B4	IC4428	*F5	Q4000	E5	R1013	*G2	R1105	G3	R1204	F3	R1441	F2
C406	A3	C1121	*G2	C2012	*K2	C2433	*M2	C4038	E4	C4243	C2	C4423	D1	C7423	*P5	CL1124	M5	D4391	B3	FB4207	C1	IC3010	*B4	IC4450	D1	Q4001	*E5	R1014	G3	R1106	G3	R1205	F3	R1442	F2
C500	E3	C1122	*G2	C2013	*K2	C2434	*M2	C4039	E4	C4244	*C2	C4424	D1	C7450	P4	CL1125	M5	D4392	D3	FB4208	C1	IC3011	*B5	IC4451	F4	Q4002	E5	R1015	G3	R1107	G3	R1206	F3	R1443	*F2
C501	E3	C1123	*F2	C2014	*K2	C2435	*M2	C4040	E4	C4245	*C2	C4425	*D1	C7451	P4	CL1126	M5	D4393	C2	FB4209	*C2	IC3013	*B4	IC4452	F5	Q4003	*D5	R1016	G3	R1108	H3	R1207	F3	R1444	*F2
C502	E3	C1131	*G2	C2015	*K2	C2436	N2	C4041	E4	C4246	*C2	C4427	*D2	C7452	P4	CL1127	M5	D7090	N2	FB4210	*C2	IC3014	K4	IC4455	*F5	Q4004	E4	R1017	*G2	R1109	H3	R1208	F3	R1445	*F2
C503	D3	C1132	*G2	C2016	*K2	C2437	N2	C4042	*E4	C4247	*C1	C4428	G4	C7460	P5	CL1128	M5	D7091	N2	FB4350	*D1	IC3200	K4	IC7091	N2	Q4005	E4	R1018	G3	R1110	G3	R1209	F3	R1446	F2
C504	D3	C1133	*G2	C2017	*K2	C2438	M2	C4043	*E4	C4248	*B1	C4429	F4	C7461	P5	CL1129	M5	D7100	M5	FB4360	*C1	IC4000	E5	IC7101	M3	Q4006	D4	R1019	G3	R1111	G3	R1210	F3	R1447	F2
C505	D3	C1141	*G2	C2018	*K2	C2439	*N2	C4044	*E4	C4249	*B1	C4430	G4	C7462	P5	CL1130	M5	D7101	N5	FB4400	F5	IC4001	E5	IC7110	N4	Q4007	*E4	R1020	G3	R1112	G3	R1211	F3	R1448	F2
C506	E3	C1142	*G2	C2019	*K2	C2440	*N2	C4045	*D4	C4250	*C2	C4431	*F5	C7500	P4	CL1131	M5	D7102	M5	FB4401	*G5	IC4002	D4	IC7120	M4	Q4008	*D4	R1021	*G2	R1113	G3	R1212	F3	R1449	*F2
C507	E3	C1143	*G2	C2020	*K2	C2441	*M2	C4046	*E4	C4251	*C2	C4432	*G4	C7501	P4	CL1132	M5	D7135	*N4	FB4402	G4	IC4003	E4	IC7140	N4	Q4200	C1	R1022	*G2	R1114	G3	R1213	F3	R1450	*F2
C508	E3	C1151	*G2	C2021	*K2	C2442	*N2	C4047	*E4	C4252	C1	C4433	*G5	C7700	*N4	CL1133	N5	D7200	N5	FB4450	D1	IC4004	E4	IC7150	M4	Q4201	*C1	R1023	G3	R1115	G3	R1214	F3	R1451	*F2
C801	E2	C1152	*G2	C2022	*K2	C2443	*N2	C4048	*E4	C4253	*C2	C4434	*G5	C7701	*N3	CL1134	M5	D7201	P5	FB802	*E2	IC4005	*D4	IC7201	N3	Q4202	*C1	R1024	G3	R1116	*G2	R1215	F3	R1452	F2
C802	D2	C1153	*G2	C2023	*K2	C2444	*N2	C4049	*D4	C4254	A3	C4435	D1	C7810	N4	CL1143	K5	D7202	N5	FB803	*E2	IC4006	*E4	IC7210	P4	Q7000	N5	R1025	*G2	R1117	*G2	R1216	F3	R1453	F2
C803	*E2	C1161	*H2	C2024	*K2	C2445	*N2	C4050	*E4	C4257	B3	C4437	*F5	C7811	N3	CL1200	J5	D7235	*N4			IC4007	*D4	IC7220	N4			R1026	*G2	R1118	*G2	R1217	F3	R1454	F2
C804	*D2	C1162	*H2	C2025	*K2	C2446	*M2	C4051	*E4	C4258	A2	C4438	*F5	C7820	M4	CL1201	J5	D7310	*M4	FL4000	C4	IC4008	C4	IC7240	P4	R200	*J2	R1027	G3	R1119	G3	R1218	F3	R1455	*F2
C805	E2	C1163	*G2	C2026	*K2	C2447	*M2	C4052	*D4	C4259	C1	C4439	*F5	C7821	M3	CL1202	K5	D7311	*M4			IC4009	*D4	IC7250	N4	R201	*J2	R1028	F3	R1120	*G1	R1219	F3	R1456	*F2
C806	E2	C1171	*G2	C2027	*K2	C2448	K1	C4053	*E4	C4260	C1	C4440	*G5	C7840	N4	CL1203	K5	D7320	*M5	IC203	*J2	IC4010	E4	IC7311	*M4	R202	*J3	R1029	F3	R1121	G2	R1220	H3	R1457	*F2
C808	E2	C1172	*H2	C2028	*L2	C2449	J1	C4054	C4	C4261	C1	C4450	D1	C7841	M4	CL1204	K5	D7321	*M5	IC204	*J2	IC4011	*E5	IC7321	*M5	R203	*J3	R1030	F3	R1122	*G1	R1221	G3	R1458	F2
C809	E2	C1173	*H2	C2029	L3	C2450	*K1	C4055	C4	C4262	C1	C4451	D1	C7850	M4	CL1205	K5	D7410	*P4	IC300	P1	IC4012	D4	IC7411	*P4	R204	*H3	R1031	F3	R1123	*G1	R1222	G3	R1459	F2
C810	*E2	C1181	*G2	C2030	J1	C2451	*K1	C4056	C4	C4263	*C1	C4452	D1	C7851	M4	CL1206	K5	D7411	*P4	IC301	P1	IC4013	E4	IC7421	*P5	R205	*J3	R1032	F3	R1124	*G1	R1223	G3	R1460	F2
C811	*D2	C1182	*G2	C2031	L2	C2452	L1	C4057	C4	C4264	C1	C4457	G5	C7910	P4	CL1207	K5	D7420	*P5	IC302	P1	IC4014	*E4	IC7500	*P4	R206	*J3	R1033	F3	R1125	*G1	R1224	G3	R1461	*F2
C812	*E2	C1183	*G2	C2032	L2	C2453	L1	C4058	*C5	C4265	C1	C7090	*N2	C7911	P3	CL1208	J5	D7421	*P5	IC500	E3	IC4015	*E4	IC7700	*N4	R207	*J3	R1034	H3	R1126	*G2	R1225	G3	R1462	*F2
C813	*D2	C1208	E1	C2033	*L2	C2454	*L1	C4059	D5	C4266	*B2	C7095	P3	C7920	N4	CL1209	J5	D7500	P4	IC501	E3	IC4016	E4	IC8000	L3	R208	*J3	R1035	H3	R1127	*G1	R1226	G3	R1463	*F2
C814	*E2	C1209	E1	C2034	*K2	C2455	*L1	C4060	C4	C4267	*B2	C7101	N4	C7921	N3	CL1210	K4	D7501	P4	IC502	E3	IC4017	E4	IC8002	L4	R209	*J3	R1036	H3	R1128	F2	R1227	G3	R1464	F2
C815	*D2	C1210	F1	C2035	*L2	C2456	J1	C4061	C4	C4268	*C1	C7102	M4	C7940	P4	CL1211	K4	D8000	L4	IC503	D3	IC4018	*E4	IC8050	*M3	R210	*H2	R1037	H3	R1129	F2	R1228	G3	R1465	F2
C816	E2	C1211	*E1	C2036	*L2	C2457	H1	C4062	E4	C4269	*C1	C7110	M3	C7941	N4	CL1212	K4	D8001	L3	IC504	D3	IC4019	*D4	IC9000	M2	R211	*H2	R1038	H3	R1130	F2	R1229	G3	R1466	F2
C817	D2	C1212	E1	C2037	*L2	C2458	*H1	C4063	*D4	C4270	*B2	C7112	M3	C7950	N4	CL1213	K4	D8002	L3	IC505	D3	IC4020	C4	IC9001	M1	R213	*J2	R1039	G3	R1131	F2	R1230	G3	R1467	*F2
C818	*E2	C1213	F1	C2038	*K2	C2459	*J1	C4064	*C4	C4271	*B2	C7114	N3	C7951	N4	CL4201	C2	D8050	M3	IC506	E3	IC4021	*C5	IC9002	N1	R214	*J2	R1040	*G3	R1132	F2	R1231	G3	R1468	*F2
C819	*E2	C1214	F1	C2039	*K2	C3000	*J3	C4065	D4	C4272	*B2	C7115	M3	C8003	L4	CL4202	C2	D8051	M3	IC507	E3	IC4022	D5	IC9003	N1	R215	*J2	R1041	G3	R1133	F2	R1232	G3	R1469	*F2
C820	E2	C1215	*E1	C2040	*K2	C3001	*J4	C4066	*E5	C4273	*B2	C7119	M3	C8004	L4	CL4203	C2			IC805	*E2	IC4023	*D5	IC9004	N1	R216	*J2	R1042	G3	R1134	G3	R1233	G3	R1470	F2
C821	D2	C1216	*E1	C2041	*K2	C3002	*J4	C4067	*E4	C4274	B3	C7120	M3	C8005	L4	CL4205	B2	E101	A5	IC806	*D2	IC4024	*C4	IC9005	M2	R217	*J2	R1043	G3	R1135	G3	R1234	G3	R1471	F2
C822	*F2	C1217	*E1	C2042	*K2	C3003	*J4	C4068	*D5	C4275	C3	C7122	M3	C8006	L4	CL4206	B2	E300	N1	IC810	*E2	IC4025	*D4	IC9006	M1	R218	*J2	R1044	*G3	R1136	*G2	R1235	G3	R1472	F2
C823	*F2	C1218	*E1	C2043	*K2	C3004	*J4	C4069	*D4	C4276	*C2	C7124	M3	C8007	L4	CL4207	C1	E501	*E3	IC811	*E2	IC4026	E4			R219	*J2	R1045	G3	R1137	G3	R1236	G3	R1473	*F2
C824	*E2	C1219	*E1	C2044	*K2	C3005	*J4	C4070	*D5	C4278	C3	C7125	M3	C8008	L4	CL4208	A2	E502	*D3	IC812	*E2	IC4091	D5	L100	H5	R220	*H2	R1046	G3	R1138	G3	R1237	G3	R1474	F2
C825	*E2	C1222	*F1	C2045	*K2	C3006	*J4	C4071	*F5	C4279	*B2	C7129	M3	C8009	L3	CL4209	C1	E801	F2	IC813	*E2	IC4092	D5	L101	H4	R300	N1	R1047	*G3	R1139	G3	R1238	G3	R1475	F2
C828	*E2	C1223	*G1	C2050	L3	C3007	*J4	C4072	D5	C4280	B3	C7132	*N3	C8010	L3	CL4210	C2	E802	*D3	IC814	*E2	IC4200	B2	L103	H4	R301	N1	R1048	G3	R1140	H2	R1239	G3	R1476	F2
C829	*D2	C1224	*F1	C2051	J2	C3008	*J3	C4073	*D5	C4281	C2	C7133	*N4	C8011	L3	CL4211	A2	E803	*E3	IC815	*D2	IC4201	B1	L106	J5	R302	P1	R1049	G3	R1141	H2	R1240	G3	R1477	*F2
C830	*E2	C1225	*G1	C2052	L2	C3009	*J3	C4074	*D5	C4282	D1	C7142	M4	C8050	L3	CL4212	A2	E1001	F1	IC816	*E2	IC4203	*C2	L107	J4	R303	P1	R1050	G3	R1142	H2	R1241	G3	R1478	F2
C831	*E2	C1226	G1	C2053	J2	C3010	*A4	C4075	E4	C4283	C2	C7143	N4	C8051	M3	CL4213	A1	E1002	*F2	IC817	*E2	IC4204	*D1	L200	J3	R304	P1	R1051	*G3	R1143	H2	R1242	G3	R1479	F2
C832	*D2	C1227	H1	C2054	L2	C3011	*A4	C4076	E4	C4284	*C2	C7145	N4	C8090	M4	CL4214	B2	E1004	*H2	IC818	*D2	IC4205	*C2	L201	J2	R305	P2	R1052	G3	R1144	H2	R1243	G3	R1480	E1
C833	*D2	C1228	G1	C2060	L3	C3012	C5	C4077	*C5	C4285	*C2	C7152	M4	C8091	M3	CL4215	A1	E1005	*F2	IC819	*E2	IC4206	A3	L400	A4	R306	N2	R1053	G3	R1145	H2	R1244	*J3	R1481	E1
C850	D3	C1229	*G1	C2061	*K2	C3013	B5	C4078	*C5	C4286	*C2	C7153	M4	C9000	M1	CL4216	A1	E2001	*J2	IC850	*E3	IC4207	*B2	L401	B4	R307	P1	R1054	G3	R1146	G1	R1245	*J3	R1482	E1
C851	E3	C1230	*H1	C2062	*L2	C3014	C5	C4079	E4	C4288	*B2	C7155	M4	C9001	M1	CL4217	A1	E2002	*K2	IC1000	G2	IC4208	*B2	L402	A4	R308	P1	R1055	*G3	R1147	G2	R1246	F3	R1483	E1
C1000	F3	C1231	H1	C2063	*K2	C3015	A5	C4080	E4	C4289	*B1	C7156	M2	C9002	M1	CL4218	A1	E2003	*L2	IC1001	F3	IC4211	*B1	L500	F3	R309	P1	R1056	G3	R1148	G1	R1247	F3	R1484	E1
C1001	G3	C1232	K4	C2064	*L2	C3016	B5	C4081	*D4	C4291	*B2	C7190	M3	C9003	M1	CL4219	A1	E2004	K1	IC1002	H3	IC4212	*B1	L800	E2	R310	P1	R1057	G3	R1149	G2	R1248	F3	R1485	E1
C1002	G3	C1233	J4	C2071	*K2	C3017	C4	C4082	*C4	C4292	*B1	C7191	N3	C9004	M1	CL4220	A1	E2005	L2	IC1003	G3	IC4213	*C2	L801	E2	R311	P1	R1058	G3	R1150	*G2	R1249	F3	R1486	E1
C1003	G4	C1234	L5	C2072	*K2	C3018	A5	C4083	*C5	C4294	D1	C7192	M3	C9005	M1	CL4221	A1	E3000	*K4	IC1004	G4	IC4214	C1	L1051	F2	R312	P1	R1059	*G2	R1151	G2	R1250	G3	R1487	E1
C1004	*G2	C1235	K5	C2073	*K2	C3019	B5	C4090	D5	C4295	C1	C7193	N3	C9006	M1	CL4222	A1	E3001	H3	IC1200	E1	IC4216	D1	L1052	F2	R313	P1	R1060	G3	R1152	*G2	R1271	*G2	R1488	E1
C1005	*G2	C1236	K5	C2074	*K2	C3020	*A4	C4092	D5	C4296	*B2	C7201	P4	C9007	M1	CL4223	C2	E3002	K4	IC1201	F1	IC4218	*C1	L1053	H2	R314	P1	R1061	G3	R1153	*G1	R1272	*G2	R1489	E1
C1006	*G2	C1251	E1	C2200	*L5	C3021	*B4	C4093	D5	C4297	*C2	C7202	N4	C9008	M2	CL4224	C2	E4000	D4	IC1202	F1	IC4220	*B2	L1054	H2	R315	P1	R1062	*G2	R1154	*G2	R1273	*G2	R1490	E1
C1007	*G2	C1252	E1	C2201	*K4	C3022	C5	C4200	A2	C4298	*C2	C7210	N3	C9009	M1	CL4225	C2	E4001	*E4	IC1203	*E1	IC4221	*C2	L1055	G1	R316	P1	R1063	*G2	R1155	*G2	R1274	*G1	R1491	E1
C1008	*G2	C1253	E1	C2202	J5	C3023	*B4	C4201	B1	C4299	*C2	C7212	N3	C9010	N1	CL4226	C2	E4203	A2	IC1205	*F1	IC4222	*C2	L1056	H3	R317	P2	R1064	G3	R1156	*G2	R1400	F2	R1492	E1
C1009	*G2	C1254	E1	C2203	J5	C3024	*B5	C4202	A2	C4300	*B2	C7214	P3	C9011	N1	CL4227	C2	E4211	*A1	IC1206	*G1	IC4223	*C2	L1060	H3	R500	E3	R1065	G3	R1157	*G2	R1401	F2	R1493	E1

R1494	F1	R1586	*F1	R1678	F1	R1770	*G2	R1862	L5	R2004	J3	R2283	*K4	R2457	*L2	R2549	*P2	R2641	*K1	R2733	J1	R2825	*K2	R3056	B4	R3148	J4	R4013	*D5	R4213	B2	R4309	*B2	R4445	D1
R1495	F1	R1587	*F1	R1679	F2	R1771	G2	R1863	L5	R2005	J3	R2284	*K4	R2458	*L2	R2550	*P2	R2642	*K1	R2734	J1	R2826	*K2	R3057	C4	R3149	J4	R4014	E4	R4214	C1	R4310	*B2	R4446	D1
R1496	F1	R1588	*F1	R1680	*G2	R1772	G1	R1864	K5	R2006	*L2	R2285	*K4	R2459	L2	R2551	*N2	R2643	*K1	R2735	J1	R2827	K2	R3058	C4	R3150	H4	R4015	*E5	R4215	C1	R4311	*B2	R4447	D1
R1497	F1	R1589	*F1	R1681	*G2	R1773	G2	R1865	*H2	R2007	*L2	R2286	*K4	R2460	L2	R2552	*N2	R2644	*K1	R2736	J1	R2828	K1	R3059	C5	R3151	C5	R4016	E4	R4216	B2	R4312	*B2	R4448	D1
R1498	F1	R1590	*F1	R1682	G1	R1774	*H2	R1866	H2	R2008	J2	R2287	*K5	R2461	N2	R2553	*N2	R2645	*K1	R2737	J1	R2829	*K2	R3060	C5	R3152	J4	R4017	E4	R4217	C1	R4313	*B2	R4449	D1
R1499	F1	R1591	*F1	R1683	G2	R1775	*H1	R1867	H2	R2009	J2	R2288	*K5	R2462	N2	R2554	*N2	R2646	*K1	R2738	J1	R2830	K1	R3061	C4	R3153	*B4	R4018	E4	R4218	C1	R4314	*B2	R4450	D1
R1500	F1	R1592	*E1	R1684	G1	R1776	G1	R1868	H2	R2010	L2	R2289	*K5	R2463	P2	R2555	*N2	R2647	L1	R2739	J1	R2831	K2	R3062	B4	R3154	*B4	R4019	D4	R4219	C2	R4315	*C2	R4451	*D1
R1501	F1	R1593	*G1	R1685	*G1	R1777	G2	R1869	*H2	R2011	L2	R2290	*K5	R2464	P2	R2556	*N2	R2648	L1	R2740	J1	R2832	K2	R3063	A5	R3155	*A4	R4020	*E4	R4220	C2	R4316	*C2	R4452	*D1
R1502	F1	R1594	*G1	R1686	G2	R1778	*H1	R1870	H3	R2012	J3	R2291	*K5	R2465	P2	R2557	*N2	R2649	L1	R2741	J1	R2833	K2	R3064	A5	R3156	*A4	R4021	*E5	R4221	A1	R4317	*C2	R4453	*D1
R1503	F1	R1595	*G1	R1687	G1	R1779	G1	R1871	H2	R2013	J3	R2292	*K5	R2466	P2	R2558	*N2	R2650	L1	R2742	J1	R2834	K2	R3065	A5	R3157	*J4	R4022	E4	R4222	A1	R4318	*C2	R4454	*D1
R1504	F1	R1596	*G1	R1688	G2	R1780	H2	R1872	H2	R2014	*L2	R2293	*H5	R2467	P2	R2559	*N2	R2651	L1	R2743	J1	R2835	K2	R3066	A5	R3158	*B4	R4023	E4	R4223	A1	R4319	*B1	R4455	*D1
R1505	F1	R1597	*G1	R1689	G1	R1781	H1	R1873	H2	R2015	*L2	R2294	*H5	R2468	P2	R2560	*M2	R2652	L1	R2744	H1	R2836	K1	R3067	A5	R3159	J4	R4024	E4	R4224	A1	R4320	*B1	R4456	*D1
R1506	F1	R1598	*F1	R1690	G2	R1782	H2	R1874	H2	R2016	J2	R2295	*H5	R2469	P2	R2561	*M2	R2653	L1	R2745	J1	R2837	K1	R3068	A5	R3160	*A4	R4025	E4	R4225	A1	R4321	*B1	R4457	*D1
R1507	F1	R1599	*F1	R1691	G1	R1783	J5	R1875	*H2	R2017	J2	R2296	*H5	R2470	N2	R2562	*M2	R2654	L1	R2746	H1	R2838	K2	R3069	A5	R3161	*A4	R4026	E4	R4226	A1	R4322	*B1	R4458	*D1
R1508	F1	R1600	*F1	R1692	*G1	R1784	J5	R1876	H2	R2018	L2	R2297	*H5	R2471	N2	R2563	*M2	R2655	L1	R2747	H1	R2839	K1	R3070	A5	R3162	*B4	R4027	E4	R4227	A1	R4323	A2	R4463	D1
R1509	F1	R1601	*F1	R1693	*G2	R1785	K5	R1877	H2	R2019	J2	R2298	*H5	R2472	N2	R2564	*M2	R2656	L1	R2748	H1	R2840	K2	R3071	B5	R3163	*B4	R4028	E4	R4228	A1	R4324	C1	R4464	D1
R1510	F1	R1602	*F1	R1694	G2	R1786	K5	R1878	H2	R2020	*J2	R2301	*J5	R2473	N2	R2565	*M2	R2657	L1	R2749	H1	R2841	K1	R3072	B5	R3164	*B4	R4029	E4	R4229	A2	R4325	C1	R4465	D1
R1511	F1	R1603	*F1	R1695	G1	R1787	K5	R1879	H2	R2021	K3	R2302	*J5	R2474	N2	R2566	*M2	R2658	L1	R2750	H1	R2842	K1	R3073	B5	R3165	*B4	R4030	E4	R4230	A2	R4326	*C2	R4466	D1
R1512	F1	R1604	*F1	R1696	G2	R1788	K5	R1880	*H2	R2022	L2	R2303	*J5	R2475	N2	R2567	*M2	R2659	L1	R2751	H1	R2843	K2	R3074	B5	R3166	H3	R4031	*F5	R4231	A2	R4327	*C2	R4467	D1
R1513	G1	R1605	*F1	R1697	*G2	R1789	J5	R1881	H2	R2023	L2	R2304	*J5	R2476	N2	R2568	*M2	R2660	L1	R2752	H1	R2844	L2	R3075	B5	R3167	*B4	R4032	D4	R4232	A2	R4350	*D1	R4468	D1
R1514	G1	R1606	*F1	R1698	G1	R1790	J5	R1882	H2	R2024	L2	R2305	*J5	R2477	N2	R2569	J1	R2661	L1	R2753	H1	R2845	K1	R3076	B5	R3168	H3	R4033	D4	R4233	A2	R4351	*D1	R4469	D1
R1515	G1	R1607	*F1	R1699	G2	R1791	J5	R1883	H2	R2025	*L2	R2306	*J5	R2478	N2	R2570	J1	R2662	L1	R2754	H1	R2846	*K2	R3077	C5	R3169	J4	R4034	*E4	R4234	A2	R4352	C1	R4470	D1
R1516	G1	R1608	*F1	R1700	G1	R1792	J5	R1884	H2	R2026	*L2	R2307	*J5	R2479	M2	R2571	J1	R2663	L1	R2755	H1	R2847	K2	R3078	B5	R3170	*J4	R4035	E4	R4235	A2	R4353	C1	R4471	D1
R1517	G1	R1609	*F1	R1701	*G2	R1793	K5	R1885	*H2	R2028	*L2	R2308	*J5	R2480	M2	R2572	J1	R2664	L1	R2756	J1	R2848	*K2	R3079	A4	R3171	*J4	R4036	D4	R4236	A2	R4354	C1	R4472	D1
R1518	G1	R1610	*F1	R1702	*G1	R1794	K5	R1886	H2	R2029	*L2	R2309	*K5	R2481	M2	R2573	J1	R2665	L1	R2757	J1	R2849	L1	R3080	A5	R3172	H3	R4037	E4	R4237	A2	R4360	*C1	R4473	D1
R1519	*E1	R1611	*F1	R1703	G1	R1795	K5	R1887	H2	R2030	K3	R2310	*K5	R2482	M2	R2574	J1	R2666	L1	R2758	J1	R2850	L1	R3081	B5	R3173	J3	R4038	E4	R4238	A2	R4361	*C1	R4474	G5
R1520	*E1	R1612	*F1	R1704	G2	R1796	K5	R1888	H2	R2031	J2	R2311	*K5	R2483	M2	R2575	J1	R2667	L1	R2759	J1	R2851	L2	R3082	A4	R3174	J4	R4039	E4	R4239	A2	R4362	C1	R4475	D1
R1521	*E1	R1613	*F1	R1705	*G2	R1797	K5	R1889	H2	R2032	*K2	R2312	*K5	R2484	M2	R2576	J1	R2668	L1	R2760	J1	R2852	*L2	R3083	A4	R3175	J4	R4040	*E4	R4240	A2	R4363	C1	R4476	*D2
R1522	*E1	R1614	*F1	R1706	*H1	R1798	K5	R1890	*H2	R2033	*K2	R2313	*J5	R2485	M2	R2577	K1	R2669	L1	R2761	J1	R2853	L1	R3084	A4	R3176	J4	R4041	*E4	R4241	A2	R4364	C1	R4477	*D2
R1523	*E1	R1615	*F1	R1707	*H1	R1799	K5	R1891	H2	R2034	*K2	R2314	*J5	R2486	M2	R2578	K1	R2670	*M1	R2762	J1	R2854	L2	R3085	A4	R3177	K4	R4042	E4	R4242	A2	R4370	*D1	R4478	*D2
R1524	*E1	R1616	*E1	R1708	*H1	R1800	K5	R1892	H2	R2035	*K2	R2315	*J5	R2487	M2	R2579	K1	R2671	*M1	R2763	J1	R2855	L1	R3086	A4	R3178	H3	R4043	E4	R4243	A2	R4371	*D1	R4479	*D2
R1525	*E1	R1617	*E1	R1709	*H1	R1801	K5	R1893	H2	R2036	*K2	R2316	*J5	R2488	N2	R2580	K1	R2672	*M1	R2764	*J1	R2856	L2	R3087	A4	R3179	K4	R4044	*D4	R4244	A2	R4380	C2	R4480	*D2
R1526	*E1	R1618	*G1	R1710	*H1	R1802	K5	R1894	H2	R2037	L2	R2317	J3	R2489	N2	R2581	K1	R2673	*M1	R2765	*J1	R2857	L2	R3088	A4	R3180	K4	R4045	*E4	R4245	A2	R4381	C1	R4481	*D2
R1527	*E1	R1619	*G1	R1711	*H1	R1803	K5	R1895	H2	R2038	J2	R2318	J3	R2490	N2	R2582	K1	R2674	*M1	R2766	*J1	R2858	*L2	R3089	A4	R3181	*B4	R4046	*D4	R4246	A2	R4382	C1	R4482	*D2
R1528	*E1	R1620	*G1	R1712	*H1	R1804	K5	R1896	H2	R2039	J2	R2319	J3	R2491	P2	R2583	K1	R2675	*M1	R2767	*J1	R2859	K2	R3090	B4	R3182	*B4	R4047	*D4	R4247	A2	R4383	C1	R4483	*D2
R1529	*E1	R1621	*F1	R1713	*H1	R1805	K5	R1897	H2	R2040	J2	R2320	J3	R2492	P2	R2584	K1	R2676	*M1	R2768	*J1	R2860	*L2	R3091	*J4	R3183	H3	R4048	*D4	R4248	A2	R4384	C1	R4484	G4
R1530	*E1	R1622	*F1	R1714	*G1	R1806	K5	R1898	H2	R2041	L2	R2321	J2	R2493	P2	R2585	K1	R2677	*M1	R2769	*J1	R3000	*J3	R3092	B4	R3184	H3	R4049	*E4	R4249	A2	R4385	C1	R4485	G4
R1531	*E1	R1623	*F1	R1715	*G1	R1807	K5	R1899	H2	R2042	*L2	R2322	J2	R2494	P2	R2586	K1	R2678	*L1	R2770	*J1	R3001	*J3	R3093	B4	R3185	H4	R4050	*D4	R4250	A1	R4386	C1	R4486	G4
R1532	E1	R1624	*F1	R1716	*G1	R1808	K5	R1900	H2	R2050	*K2	R2323	J3	R2495	P2	R2587	K1	R2679	*L1	R2771	*J1	R3002	*J3	R3094	B4	R3186	H4	R4051	*E4	R4251	A1	R4387	C1	R4487	G4
R1533	E1	R1625	*F1	R1717	*G1	R1809	L5	R1901	H3	R2051	*K2	R2324	J3	R2496	P2	R2588	J1	R2680	*L1	R2772	*H1	R3003	*J4	R3095	B4	R3187	J4	R4052	*E4	R4252	A2	R4388	*B2	R4488	G4
R1534	E1	R1626	*F1	R1718	*G1	R1810	L5	R1902	H3	R2052	J2	R2325	J2	R2497	N2	R2589	K1	R2681	*L1	R2773	*H1	R3004	*J4	R3096	B5	R3199	B5	R4053	*E4	R4253	A2	R4389	*B2	R4489	G4
R1535	E1	R1627	*F1	R1719	*G1	R1811	L5	R1903	H2	R2200	*L5	R2326	J2	R2498	N2	R2590	J1	R2682	*L1	R2774	*H1	R3005	*J4	R3097	B4	R3200	H3	R4054	*E4	R4254	B2	R4390	C2	R4490	G4
R1536	E1	R1628	*F1	R1720	*G1	R1812	L5	R1904	H2	R2201	*L5	R2327	J2	R2499	N2	R2591	J1	R2683	*L1	R2775	*H1	R3006	*A4	R3098	H3	R3201	J3	R4055	D4	R4255	B2	R4391	C2	R4491	G4
R1537	E1	R1629	*F1	R1721	*G1	R1813	L5	R1905	H2	R2202	*L5	R2328	J2	R2500	N2	R2592	*K1	R2684	*L1	R2776	*H1	R3007	*A4	R3099	J3	R3202	H3	R4056	D4	R4256	B2	R4392	*C2	R4492	*F5
R1538	E1	R1630	H1	R1722	*G1	R1814	L5	R1906	*H1	R2203	*L5	R2329	J2	R2501	N2	R2593	*K1	R2685	*L1	R2777	*H1	R3008	*A4	R3100	J3	R3203	H3	R4057	D4	R4257	B1	R4393	*C2	R4493	*F5
R1539	E1	R1631	H1	R1723	*G1	R1815	L5	R1907	H2	R2204	*L5	R2330	J2	R2502	N2	R2594	*K1	R2686	*L1	R2778	*H1	R3009	*A4	R3101	H3	R3204	H3	R4058	D4	R4258	C2	R4394	B1	R4494	*F5
R1540	E1	R1632	H1	R1724	*G1	R1816	K5	R1908	H2	R2205	*L5	R2331	J2	R2503	N2	R2595	*K1	R2687	*L1	R2779	*H1	R3010	*B4	R3102	J3	R3205	J3	R4059	D4	R4259	C2	R4395	B1	R4495	*F5
R1541	E1	R1633	H1	R1725	*H1	R1817	L5	R1909	H2	R2206	*K5	R2332	J2	R2504	N2	R2596	*K1	R2688	*L1	R2780	*H1	R3011	*B4	R3103	H3	R3206	J3	R4060	D4	R4260	C2	R4400	*F5	R4496	*F5
R1542	E1	R1634	H1	R1726	*G1	R1818	L5	R1910	*H2	R2207	*K5	R2333	J2	R2505	N2	R2597	*K1	R2689	*M1	R2781	*H1	R3012	*B4	R3104	J3	R3207	J3	R4061	D4	R4261	C2	R4401	*F5	R4497	*F5
R1543	E1	R1635	H1	R1727	*H1	R1819	L5	R1911	H2	R2208	*K5	R2334	J2	R2506	M2	R2598	*K1	R2690	*L1	R2782	*H1	R3013	*B4	R3105	H3	R3208	H4	R4062	D4	R4262	C2	R4402	G5	R4498	*F5
R1544	F1	R1636	H1	R1728	*H1	R1820	L5	R1912	H2	R2209	*K5	R2335	J2	R2507	M2	R2599	*K1	R2691	*M1	R2783	*J1	R3014	*A4	R3106	J3	R3209	H4	R4063	D4	R4263	*B1	R4403	*G5	R4499	*F5
R1545	F1	R1637	H1	R1729	*H1	R1821	L5	R1913	H2	R2210	*K5	R2336	J2	R2508	M2	R2600	*K1	R2692	*M1	R2784	*H1	R3015	*B4	R3107	H3	R3210	H4	R4064	D4	R4264	*B1	R4404	F4	R4500	*G4
R1546	F1	R1638	G1	R1730	*H1	R1822	L5	R1914	*H2	R2211	*K5	R2337	J2	R2509	M2	R2601	*K1	R2693	L1	R2785	*J1	R3016	*B4	R3108	J3	R3211	H4	R4065	D4	R4265	C2	R4405	G5	R4501	*G4
R1547	F1	R1639	G1	R1731	*H1	R1823	L5	R1915	*H2	R2212	J5	R2338	J2	R2510	M2	R2602	*K1	R2694	L1	R2786	*J1	R3017	*B4	R3109	H4	R3212	H4	R4066	E4	R4266	*B1	R4406	*G5	R4502	*H4
R1548	F1	R1640	G1	R1732	*H1	R1824	L5	R1916	*H2	R2213	J5	R2339	J2	R2511	M2	R2603	*K1	R2695	L1	R2787	K1	R3018	*A4	R3110	J4	R3213	J3	R4067	E4	R4267	*B1	R4407	*G5	R4503	*H4
R1549	F1	R1641	G1	R1733	*H1	R1825	K4	R1917	H2	R2214	*L5	R2340	J2	R2512	M2	R2604	*K1	R2696	L1	R2788	K1	R3019	C5	R3111	H4	R3214	H4	R4068	*C4	R4268	*B1	R4408	*G5	R4504	*H4
R1550	F1	R1642	G1	R1734	*H1	R1826	K4	R1918	H2	R2215	*K5	R2341	J2	R2513	M2	R2605	*K1	R2697	L1	R2789	K1	R3020	C5	R3112	J4	R3215	*J3	R4069	C4	R4269	*B1	R4409	*H5	R4505	*H4
R1551	F1	R1643	G1	R1735	*H1	R1827	K4	R1919	H2	R2216	J5	R2342	J2	R2514	M2	R2606	*K1	R2698	L1	R2790	*J1	R3021	A5	R3113	H4	R3247	K3	R4070	C4	R4270	C2	R4410	*H5	R4506	*H4
R1552	F1	R1644	G1	R1736	*H1	R1828	K4	R1920	*H2	R2217	J5	R2343	J2	R2515	*N2	R2607	*K1	R2699	L1	R2791	*J1	R3022	A5	R3114	J4	R3250	B4	R4071	C4	R4271	*C2	R4411	*H5	R4507	*H4
R1553	F1	R1645	G1	R1737	*G1	R1829	K4	R1921	*H2	R2218	*K5	R2344	J2	R2516	*N2	R2608	*K1	R2700	L1	R2792	*J1	R3023	A5	R3115	H4	R3251	*B4	R4072	C4	R4272	*C2	R4412	*H5	R4508	F5
R1554	F1	R1646	G1	R1738	*G1	R1830	K4	R1922	H2	R2219	*K5	R2345	J2	R2517	*P2	R2609	*K1	R2701	L1	R2793	*J1	R3024	A5	R3116	J4	R3252	*B4	R4073	C4	R4273	*C2	R4413	*H5	R4509	F5
R1555	F1	R1647	G1	R1739	*G1	R1831	K4	R1923	H2	R2229	*K5	R2346	J2	R2518	*P2	R2610	*K1	R2702	L1	R2794	*J1	R3025	B5	R3117	J4	R3260	J3	R4074	C4	R4274	*C2	R4414	*G5	R4510	F4
R1556	F1	R1648	G1	R1740	*G1	R1832	K4	R1924	H2	R2230	J5	R2350	J2	R2519	*P2	R2611	*K1	R2703	L1	R2795	*J1	R3026	B5	R3118	H4	R3261	J3	R4075	*C4	R4275	C1	R4415	*G5	R4511	*G5
R1557	F1	R1649	H1	R1741	*G1	R1833	K4	R1925	*H2	R2236	K3	R2351	J2	R2520	*P2	R2612	*K1	R2704	L1	R2796	*J1	R3027	B5	R3119	J4	R3262	J3	R4076	D4	R4276	*B1	R4416	G5	R4512	G4
R1558	F1	R1650	G1	R1742	*G1	R1834	K4	R1926	*H2	R2243	K3	R2352	J2	R2521	*P2	R2613	*K1	R2705	L1	R2797	*J1	R3028	B5	R3120	H4	R3263	J3	R4077	*C4	R4277	*B1	R4417	G5	R4513	G5
R1559	F1	R1651	H1	R1743	*G1	R1835	K4	R1927	H2	R2244	K3	R2353	J2	R2522	*P2	R2614	*K1	R2706	L1	R2798	*H1	R3029	B5	R3121	J4	R3264	K4	R4078	*C4	R4278	*C2	R4418	G5	R4514	G5
R1560	F1	R1652	H1	R1744	*G1	R1836	J4	R1928	H2	R2245	K3	R2354	*K2	R2523	*P2	R2615	J1	R2707	L1	R2799	*H1	R3030	B5	R3122	H4	R3265	K3	R4079	*C5	R4279	C1	R4419	G5	R4515	*G5
R1561	G1	R1653	H1	R1745	G1	R1837	J4	R1929	H2	R2246	K3	R2367	J2	R2524	*N2	R2616	J1	R2708	L1	R2800	*H1	R3031	B5	R3123	J4	R3268	J3	R4080	*C5	R4280	*C1	R4420	G5	R4516	*G5
R1562	G1	R1654	H1	R1746	G2	R1838	J4	R1930	*H2	R2253	J3	R2368	J2	R2525	*N2	R2617	J1	R2709	*M1	R2801	*H1	R3032	B5	R3124	J4	R3269	J3	R4081	*C5	R4281	*D1	R4421	G5	R4525	*H5
R1563	G1	R1655	H1	R1747	*G1	R1839	J4	R1931	*H2	R2254	K3	R2369	J2	R2526	*N2	R2618	J1	R2710	*M1	R2802	*H1	R3033	B5	R3125	H4	R3270	J4	R4082	D5	R4282	*D1	R4422	G5	R4551	F4
R1564	G1	R1656	H1	R1748	G1	R1840	J4	R1932	H2	R2255	K3	R2370	J2	R2527	*N2	R2619	J1	R2711	*M1	R2803	*H1	R3034	B5	R3126	H4	R3273	J3	R4083	*C4	R4283	*C2	R4423	G5	R4552	F4
R1565	G1	R1657	H1	R1749	G2	R1841	L5	R1933	H2	R2256	K3	R2372	J1	R2528	*N2	R2620	J1	R2712	*M1	R2804	*H1	R3035	B5	R3127	J4	R3275	*J3	R4084	D4	R4284	*C2	R4424	G5	R4553	D1
R1566	G1	R1658	H1	R1750	G1	R1842	L5	R1934	*H2	R2257	*K2	R2375	J1	R2529	*N2	R2621	J1	R2713	*M1	R2805	*H1	R3036	B5	R3128	J4	R3276	H3	R4085	*C4	R4285	*C2	R4425	G5	R4554	D1
R1567	G1	R1659	H1	R1751	*G1	R1843	L5	R1935	*H2	R2258	K3	R2380	*K2	R2530	*N2	R2622	J1	R2714	*M1	R2806	K2	R3037	B5	R3129	J4	R3277	K3	R4086	*C4	R4286	*C2	R4426	G5	R4555	*D1
R1568	*E1	R1660	H1	R1752	*G2	R1844	L5	R1936	*H2	R2265	*L5	R2381	J2	R2531	*N2	R2623	K1	R2715	*M1	R2807	K1	R3038	B5	R3130	J4	R3278	J3	R4087	*D5	R4287	C1	R4427	G4	R4556	D1
R1569	*E1	R1661	G1	R1753	G2	R1845	L5	R1937	*H2	R2266	*K5	R2382	*K2	R2532	*N2	R2624	K1	R2716	*M1	R2808	K2	R3039	A5	R3131	J4	R3279	J3	R4088	*D5	R4288	D1	R4428	G5	R4557	D1
R1570	*E1	R1662	G1	R1754	G1	R1846	L5	R1938	H1	R2267	*K4	R2383	J2	R2533	*M2	R2625	K1	R2717	*L1	R2809	K1	R3040	B5	R3132	J4	R3280	J3	R4089	*D5	R4291	*B1	R4429	G5	R4558	D1
R1571	*E1	R1663	G1	R1755	G2	R1847	L5	R1939	H1	R2268	*K5	R2384	J2	R2534	*M2	R2626	K1	R2718	*L1	R2810	K1	R3041	A4	R3133	J4	R3281	J3	R4090	*D5	R4292	*B1	R4430	*G5	R4560	G4
R1572	*E1	R1664	G1	R1756	*G2	R1848	L5	R1940	H1	R2269	*L5	R2385	J2	R2535	*M2	R2627	K1	R2719	*L1	R2811	K1	R3042	A4	R3134	J4	R3282	H3	R4091	*D4	R4293	*B1	R4431	*G5	R4561	G4
R1573	*E1	R1665	G1	R1757	G1	R1849	K5	R1941	H1	R2270	*L5	R2390	*K2	R2536	*M2	R2628	K1	R2720	*L1	R2812	K1	R3043	A4	R3135	J4	R4000	E5	R4200	B2	R4296	*C2	R4432	*G5	R4562	G4
R1574	*E1	R1666	G1	R1758	G2	R1850	K5	R1942	F3	R2271	*L5	R2391	J2	R2537	*M2	R2629	K1	R2721	*L1	R2813	K2	R3044	A4	R3136	J4	R4001	E5	R4201	B2	R4297	C1	R4433	*G5	R7100	N5
R1575	*E1	R1667	G1	R1759	G1	R1851	K5	R1943	F3	R2272	*L5	R2392	J2	R2538	*M2	R2630	K1	R2722	*L1	R2814	K2	R3045	B4	R3137	J4	R4002	E5	R4202	C2	R4298	C1	R4434	*G5	R7101	N4
R1576	*E1	R1668	G1	R1760	*G2	R1852	K5	R1944	F3	R2273	*L5	R2393	J2	R2539	*M2	R2631	*K1	R2723	*L1	R2815	K1	R3046	B4	R3138	J4	R4003	E5	R4203	B2	R4299	*B2	R4435	D1	R7102	M4
R1577	*E1	R1669	F1	R1761	G2	R1853	K5	R1945	F3	R2274	*L5	R2394	J2	R2540	*M2	R2632	*K1	R2724	*L1	R2816	K1	R3047	B4	R3139	J4	R4004	E5	R4204	B2	R4300	*B2	R4436	D1	R7103	N5
R1578	*E1	R1670	F1	R1762	G1	R1854	K5	R1975	*G2	R2275	*K5	R2395	J2	R2541	*M2	R2633	*K1	R2725	H1	R2817	K2	R3048	B4	R3140	J4	R4005	E5	R4205	A2	R4301	*C2	R4437	D1	R7104	M5
R1579	*E1	R1671	F2	R1763	G2	R1855	K5	R1980	*G2	R2276	*K5	R2400	*L2	R2542	*N2	R2634	*K1	R2726	H1	R2818	*K2	R3049	B4	R3141	J4	R4006	*E5	R4206	C1	R4302	*C2	R4438	D1	R7110	M3
R1580	*F1	R1672	F1	R1764	*G2	R1856	K5	R1990	F2	R2277	*K5	R2401	L2	R2543	*N2	R2635	*K1	R2727	H1	R2819	*K2	R3050	B4	R3142	J4	R4007	*E5	R4207	C1	R4303	*C1	R4439	D1	R7111	M3
R1581	*F1	R1673	F2	R1765	*G2	R1857	L5	R1991	F2	R2278	*K5	R2402	L2	R2544	*P2	R2636	*K1	R2728	H1	R2820	*K2	R3051	B4	R3143	J4	R4008	F5	R4208	C1	R4304	*C1	R4440	D1	R7112	M3
R1582	*F1	R1674	F1	R1766	G1	R1858	L5	R2000	*K2	R2279	*K5	R2403	L2	R2545	*P2	R2637	*K1	R2729	H1	R2821	K2	R3052	B4	R3144	J4	R4009	*E5	R4209	C2	R4305	*B2	R4441	D1	R7113	M3
R1583	*F1	R1675	F2	R1767	G2	R1859	L5	R2001	J2	R2280	*K5	R2405	L2	R2546	*P2	R2638	*K1	R2730	H1	R2822	K1	R3053	B4	R3145	J4	R4010	*E5	R4210	B2	R4306	*B2	R4442	D1	R7114	N3
R1584	*F1	R1676	*G1	R1768	G1	R1860	L5	R2002	K2	R2281	*K4	R2421	L2	R2547	*P2	R2639	*K1	R2731	H1	R2823	K2	R3054	B4	R3146	J4	R4011	E5	R4211	A1	R4307	*B2	R4443	D1	R7115	M3
R1585	*F1	R1677	F2	R1769	*G2	R1861	L5	R2003	K2	R2282	*K4	R2426	L2	R2548	*P2	R2640	*K1	R2732	H1	R2824	K1	R3055	B4	R3147	J4	R4012	*E5	R4212	C2	R4308	*B2	R4444	D1	R7116	N3

R7117	M3	R7314	*M4	RB1007	F3	TP4213	C1
R7118	N3	R7315	*M4	RB1200	K5	TP4214	C1
R7119	M3	R7316	*M4	RB1201	J5	TP4242	C2
R7120	M3	R7317	*L4	RB1202	K5	TP4243	C2
R7121	M3	R7318	*M4	RB1203	L5	TP4291	B1
R7122	M3	R7320	*M4	RB1204	K5	TP4292	B1
R7123	M3	R7321	*M4	RB1205	L5	TP4293	B1
R7124	M3	R7322	*M5	RB1217	K5	TP4370	D1
R7125	M3	R7323	*M5	RB1218	L5	TP4400	F5
R7126	M3	R7324	*M5	RB1219	K5	TP4401	F5
R7127	M3	R7325	*M5	RB1220	L5	TP4402	F5
R7128	M3	R7326	*M5	RB2001	L2	TP4403	E1
R7129	M3	R7327	*M5	RB2200	D1	TP4407	C2
R7130	*M3	R7328	*M5	RB2201	K3	TP4408	D2
R7131	*M3	R7410	*P4	RB2202	*M1	TP4409	D2
R7132	*N3	R7411	*P4	RB300	P2	TP4450	E1
R7133	*N4	R7412	*P4	RB3000	*A4	TP7101	N5
R7135	*N4	R7413	*P4	RB3001	*A4	TP7102	M5
R7140	M4	R7414	*P4	RB3002	A5	TP7131	N4
R7141	N4	R7415	*P4	RB3003	B5	TP7201	P5
R7142	M4	R7416	*P4	RB3004	A5	TP7202	N5
R7143	N4	R7417	*P4	RB3005	B5	TP7231	N4
R7150	M4	R7418	*P4	RB3009	B5	TP8001	L4
R7151	M4	R7420	*P4	RB3010	B5	TP9000	N1
R7152	M4	R7421	*P4	RB3011	A5	TP9001	N1
R7153	M4	R7422	*P5	RB3012	B5	TP9002	N1
R7181	N3	R7423	*P5			TP9021	M2
R7182	M3	R7424	*P5	RV4000	C4	TP9070	L1
R7183	M3	R7425	*P5	RV4200	C1	TP9071	M1
R7184	M3	R7426	*P5			TP9072	M1
R7185	M3	R7427	*P5	RY7100	M5	TP9080	N1
R7186	M3	R7428	*P5	RY7200	N5	TP9081	N1
R7187	M3	R8000	L4			TP9082	N1
R7188	M3	R8001	L4	S1200	F4	TP9083	N1
R7190	*M3	R8002	L4	S2200	J3	TP9101	M2
R7191	*M3	R8003	L4	S2201	D1	TP9102	M1
R7192	*M3	R8004	L4	S2202	M1		
R7193	*M3	R8005	L4			X4200	*B1
R7200	N5	R8006	L4	TP202	K1	X4201	*B1
R7201	P4	R8007	L4	TP203	K1	X4202	C1
R7202	N4	R8008	L4	TP204	K1	X4203	C1
R7203	P5	R8009	L4	TP300	P2	X4204	*C2
R7204	N5	R8010	L3	TP500	E3	X4205	*C2
R7210	N3	R8011	L3	TP502	E3	X4350	*D1
R7211	N3	R8012	L3	TP503	D3	X4360	*C1
R7212	N3	R8013	L3	TP505	D3	X9000	N2
R7213	N3	R8014	L3	TP581	E3		
R7214	P3	R8015	L3	TP582	D3	*:B SIDE	
R7215	N3	R8016	L4	TP801	E2		
R7216	P3	R8017	L4	TP802	D2		
R7217	N3	R8021	L4	TP811	E2		
R7218	P3	R9000	M2	TP812	E2		
R7219	N3	R9001	M1	TP813	E2		
R7220	N3	R9002	M2	TP814	E2		
R7221	N3	R9003	M1	TP1011	E3		
R7222	N3	R9004	M1	TP1012	E3		
R7223	N3	R9005	M1	TP1013	F2		
R7224	N3	R9006	M1	TP1014	E3		
R7225	N3	R9007	M1	TP1015	F2		
R7226	N3	R9008	M1	TP1016	E1		
R7227	N3	R9009	M1	TP1061	H3		
R7228	N3	R9010	M1	TP1062	H3		
R7229	N3	R9011	M1	TP1063	H4		
R7230	*N3	R9012	M1	TP1064	H3		
R7231	*N3	R9013	M1	TP1065	H2		
R7232	*N3	R9014	M1	TP1066	H2		
R7233	*N3	R9015	M1	TP1071	F3		
R7235	*N4	R9016	M1	TP1072	F3		
R7240	P4	R9017	M1	TP1081	F3		
R7241	P4	R9018	M1	TP1082	F3		
R7242	P4	R9019	M1	TP2200	K3		
R7243	P4	R9020	M2	TP2201	K3		
R7250	N4	R9021	N2	TP2202	K3		
R7251	N4	R9022	N1	TP2203	K3		
R7252	N4	R9023	N1	TP3001	C5		
R7253	N4	R9024	M1	TP4000	E4		
R7281	P3	R9025	N1	TP4001	E4		
R7282	N3	R9026	N1	TP4002	E4		
R7283	N3	R9027	N1	TP4003	D4		
R7284	N3	R9028	N1	TP4004	C4		
R7285	N3	R9029	N1	TP4005	D4		
R7286	N3	R9030	N1	TP4007	D5		
R7287	N3	R9031	N1	TP4200	C2		
R7288	N3	R9032	N1	TP4201	C2		
R7290	*N3	R9033	N1	TP4202	C2		
R7291	*N3	R9034	N1	TP4204	A1		
R7292	*N3	R9050	M1	TP4205	A1		
R7293	*N3	R9051	M1	TP4206	A1		
R7310	*M4			TP4207	C2		
R7311	*M4	RB1000	*F3	TP4208	A1		
R7312	*M4	RB1001	J3	TP4209	C2		
R7313	*M4	RB1006	F3	TP4210	A1		

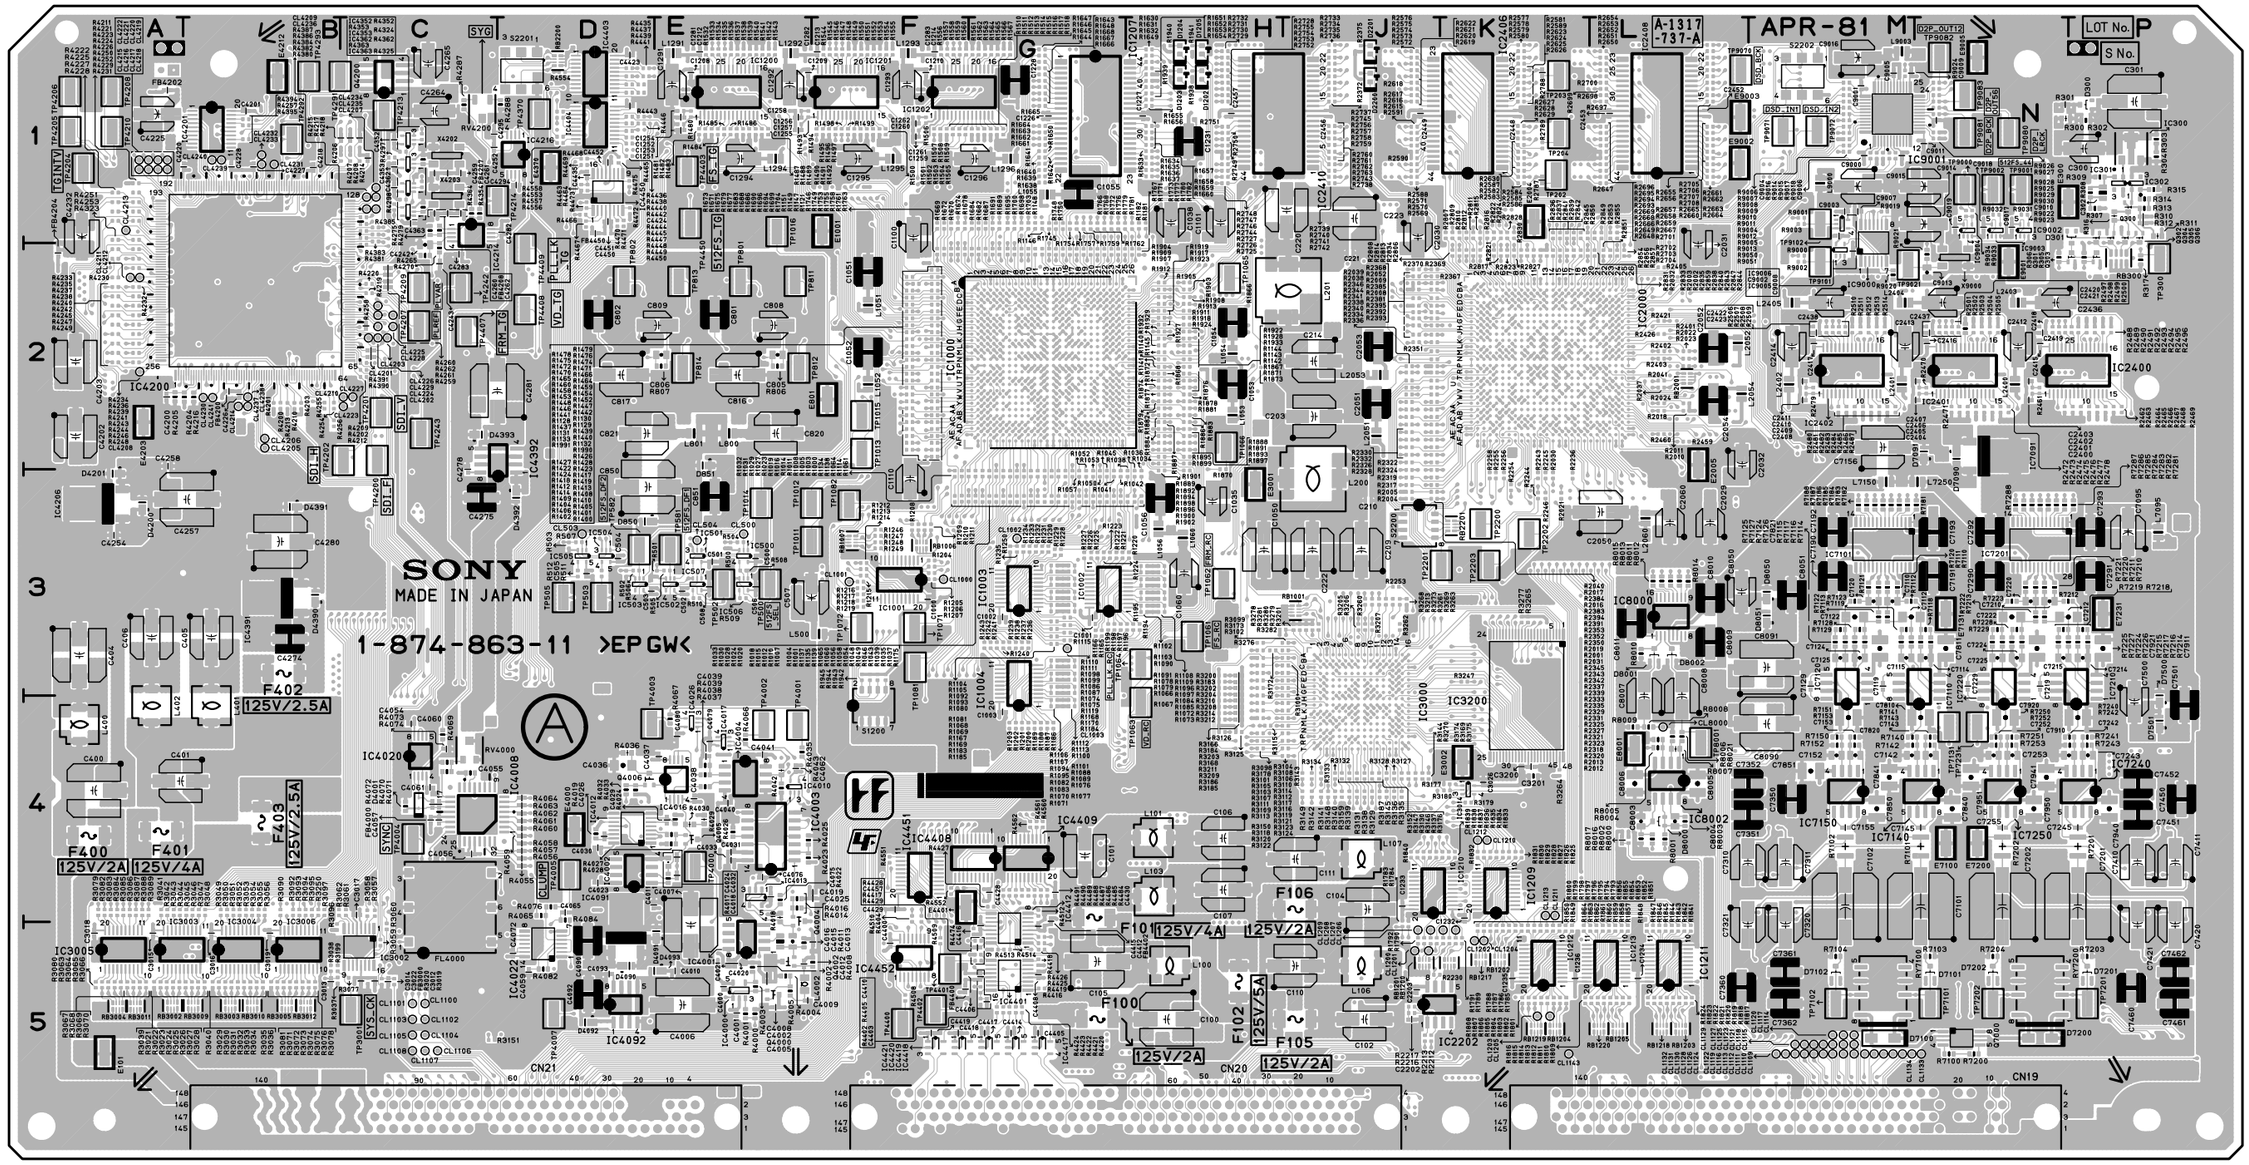

APR-81 -A SIDE-
SUFFIX: -11

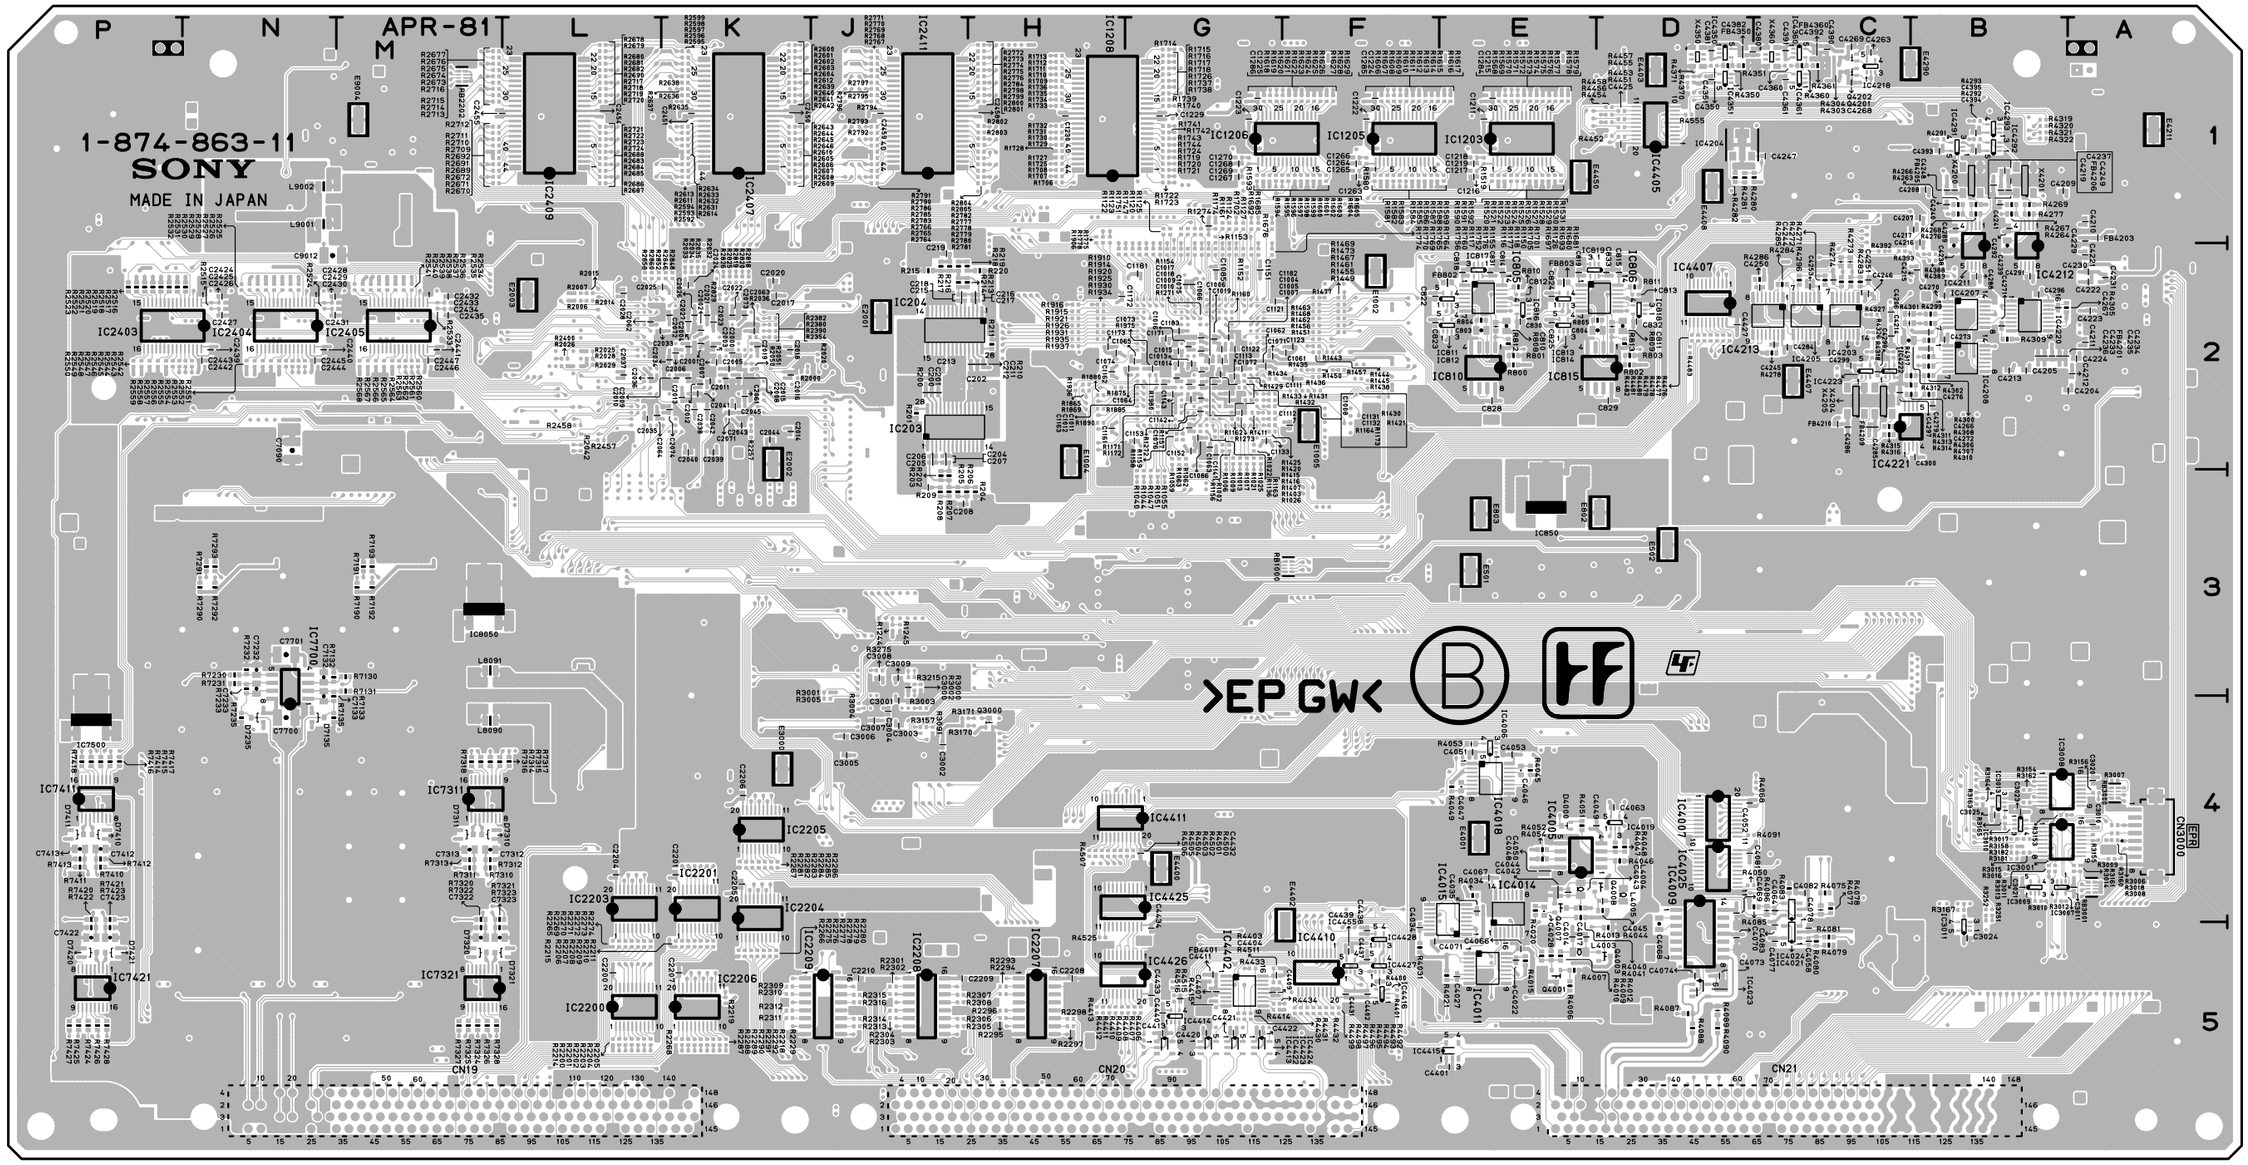

APR-81 -B SIDE-
SUFFIX: -11

APR-91 (1-881-892-11)

C101 G4	C1071 E2	C2063 *K2	C2454 *K1	C4053 *E4	C4245 *C2	C4423 D1	C7423 *P5	CL1114 M5	D4001 C4	F402 B3	IC2405 *M2	IC4407 *D2	L9003 N1	R1011 L5	R1103 G3	R1195 G3	R1287 *H2
C102 J5	C1072 F2	C2064 *K2	C2455 *K1	C4054 C4	C4246 *C2	C4424 D1	C7450 P4	CL1115 M5	D4090 D5	F403 B4	IC2406 J1	IC4408 G4		R1012 L5	R1104 G3	R1196 G3	R1288 *H2
C104 J4	C1073 F2	C2070 J1	C2456 H1	C4055 C4	C4247 C1	C4425 *D1	C7451 P4	CL1116 M5	D4091 E5		IC2407 *J1	IC4409 G4	Q300 P2	R1013 L5	R1105 *F3	R1197 G3	R1289 *H2
C106 H4	C1074 F2	C2071 J2	C2457 G1	C4056 C4	C4248 *B1	C4427 *D2	C7452 P4	CL1119 M5	D4092 D5	FB802 *E3	IC2408 K1	IC4410 *F5	Q301 P2	R1014 L5	R1106 G3	R1198 G3	R1290 F2
C107 H4	C1075 F2	C2072 *J2	C2458 *G1	C4057 C4	C4249 *B1	C4428 G4	C7460 P5	CL1120 M5	D4093 E5	FB803 *D3	IC2409 *K1	IC4411 *H4	Q302 P2	R1015 K5	R1107 G3	R1199 G3	R1291 *H3
C110 J5	C1076 F2	C2073 *J2	C2459 *H1	C4058 *C5	C4250 *C2	C4429 F4	C7461 P5	CL1121 M5	D4200 A4	FB1050 H2	IC2410 G1	IC4412 G5	Q303 P2	R1016 K5	R1108 G3	R1200 G3	R1292 F2
C111 J4	C1077 F2	C2074 *J2	C2460 *L1	C4059 D5	C4251 *C2	C4430 G4	C7462 P5	CL1122 M5	D4201 A3	FB2050 L2	IC2411 *H1	IC4413 *G5	Q304 P2	R1017 K5	R1109 G3	R1201 G3	R1293 *H3
C210 J2	C1078 F2	C2075 *J2	C2461 *M1	C4060 C4	C4252 C1	C4431 *F5	C7500 P4	CL1123 M5	D4390 B3	FB3000 C5	IC2412 *L1	IC4414 *G5	Q305 P2	R1018 K5	R1110 G3	R1202 G3	R1294 *H3
C211 J2	C1079 F2	C2076 *J2	C2462 *M1	C4061 C4	C4253 *C2	C4432 *G4	C7501 P4	CL1124 M5	D4391 B3	FB4000 C4	IC2413 *M1	IC4415 *E5	Q306 P2	R1019 K5	R1111 G3	R1203 G3	R1295 F2
C212 J2	C1080 *G3	C2077 *J2	C2463 *N1	C4062 E4	C4254 A4	C4433 *G5	C7700 *N4	CL1125 N5	D4392 D2	FB4200 B2	IC2414 L1	IC4416 *F5	Q3000 *H4	R1020 K5	R1112 *G3	R1204 G3	R1296 *H3
C213 J2	C1081 F2	C2078 *J2	C2464 L1	C4063 *D4	C4257 A3	C4434 *G5	C7701 *N3	CL1126 N5	D4393 C2	FB4201 *B2	IC3000 J4	IC4417 G5	Q4000 E5	R1021 K5	R1113 *F3	R1205 G3	R1297 *H2
C220 J3	C1082 F3	C2079 *J2	C2465 L1	C4064 *C4	C4258 A3	C4435 D1	C7810 N4	CL1129 M5	D4394 B3	FB4202 A1	IC3001 *B4	IC4418 G5	Q4001 *E5	R1022 K5	R1114 G3	R1206 G3	R1298 *H2
C221 J3	C1083 H2	C2080 *K3	C3000 *J3	C4065 D4	C4259 *C1	C4437 *F5	C7811 N3	CL1130 M5	D4395 B2	FB4203 *A1	IC3002 C5	IC4419 G5	Q4002 E5	R1023 K5	R1115 G3	R1207 G3	R1299 *H2
C222 J2	C1084 H2	C2091 *L2	C3001 *J4	C4066 *E5	C4260 *C1	C4438 *F5	C7820 M4	CL1131 M5	D7090 N2	FB4204 A2	IC3003 A5	IC4420 F5	Q4003 *D5	R1024 K5	R1116 *H2	R1208 G3	R1300 *H2
C223 *H2	C1091 *G2	C2092 *K2	C3002 *J4	C4067 *E4	C4261 *C1	C4439 *F5	C7821 M3	CL1132 M5	D7091 N2	FB4205 *B1	IC3004 B5	IC4421 F5	Q4004 E5	R1025 L5	R1117 *G3	R1209 G3	R1301 *F2
C224 *H2	C1092 *G2	C2093 *K2	C3003 *J4	C4068 *D5	C4262 *C1	C4440 *G5	C7840 N4	CL1143 K5	D7100 M5	FB4206 *B1	IC3005 A5	IC4422 *G5	Q4005 E4	R1026 L5	R1118 G3	R1210 F3	R1302 *F2
C225 *J2	C1093 *G2	C2094 *K2	C3004 *J4	C4069 *D4	C4263 *B1	C4450 D1	C7841 M4	CL1200 J5	D7101 N5	FB4207 *C1	IC3006 B5	IC4423 *G5	Q4006 E4	R1027 L5	R1119 *H2	R1211 F3	R1303 *F2
C226 *J2	C1094 G2	C2095 *K2	C3005 *J4	C4070 *D5	C4264 C1	C4451 D1	C7850 M4	CL1201 J5	D7102 M5	FB4208 *C1	IC3007 *B4	IC4424 *G5	Q4007 *E4	R1028 L5	R1120 G3	R1212 G4	R1304 F2
C227 *J3	C1095 *G2	C2096 *K2	C3006 *J4	C4071 *E5	C4265 C1	C4452 D1	C7851 M4	CL1202 K5	D7135 *N4	FB4209 *C2	IC3008 *B4	IC4425 *H5	Q4008 *D4	R1029 L5	R1121 G3	R1213 H3	R1305 *F2
C228 *J3	C1096 *G2	C2097 *L2	C3007 *J4	C4072 D5	C4266 *B2	C4457 G5	C7910 P4	CL1203 K5	D7200 N5	FB4210 *C2	IC3009 *B4	IC4426 *H5	Q4200 B1	R1030 L5	R1122 H3	R1214 H4	R1306 F2
C300 P2	C1097 *G2	C2098 *K2	C3008 *J3	C4073 *D5	C4267 *B2	C7090 *N2	C7911 P3	CL1204 K5	D7201 P5	FB4350 *C1	IC3010 *B4	IC4427 *F5	Q4201 *C1	R1031 L5	R1123 H3	R1215 G3	R1307 *F2
C301 P2	C1098 *G2	C2191 J2	C3009 *J3	C4074 *D5	C4268 *C1	C7095 P3	C7920 N4	CL1205 K5	D7202 N5	FB4360 *C1	IC3011 *B5	IC4428 *F5	Q4202 *C1	R1032 L5	R1124 H3	R1216 G4	R1400 C5
C302 P2	C1208 D2	C2192 J2	C3010 *A4	C4075 E4	C4269 *C1	C7101 N4	C7921 N3	CL1206 K5	D7235 *N4	FB4400 F5	IC3013 *B4	IC4450 D1	Q7000 N5	R1033 J5	R1125 H3	R1217 G3	R1401 C5
C401 A4	C1209 D1	C2193 L3	C3011 *A4	C4076 E4	C4270 *B2	C7102 M4	C7940 P4	CL1207 J5	D7310 *M4	FB4401 *G5	IC3014 K4	IC4451 F4		R1034 K5	R1126 H3	R1218 G4	R1402 C5
C405 B3	C1210 D1	C2194 L2	C3012 C5	C4077 *C5	C4271 *B2	C7110 M3	C7941 N4	CL1208 J5	D7311 *M4	FB4402 G4	IC3200 K4	IC4452 F5	R210 H2	R1035 K5	R1127 H3	R1219 H3	R1403 C5
C406 A3	C1211 *E2	C2200 *L5	C3013 B5	C4078 *C5	C4272 *B2	C7112 M3	C7950 N4	CL1209 J5	D7320 *M5	FB4450 D1	IC4000 E5	IC4455 *F5	R211 H2	R1036 K5	R1128 H3	R1220 H4	R1404 F2
C500 E3	C1212 D2	C2201 *L4	C3014 C5	C4079 E4	C4273 *B2	C7114 N3	C7951 N4	CL1210 K4	D7321 *L5		IC4001 E5	IC7091 N2	R220 H2	R1037 J5	R1129 H3	R1221 G3	R1405 F2
C501 E3	C1213 D1	C2202 J5	C3015 A5	C4080 E4	C4274 B3	C7115 M3	C8003 L4	CL1211 K4	D7410 *P4	FL4000 C4	IC4002 D4	IC7101 M3	R221 H2	R1038 J5	R1130 H3	R1222 G4	R1406 F2
C502 E3	C1214 D1	C2203 J5	C3016 B5	C4081 *D4	C4275 C2	C7119 M3	C8004 L4	CL1212 K4	D7411 *P4		IC4003 E4	IC7110 N3	R222 H2	R1039 J5	R1131 H3	R1223 G3	R1407 F2
C503 E3	C1215 *E2	C2204 *L4	C3017 C4	C4082 *C4	C4276 *C2	C7120 M3	C8005 L4	CL1213 K4	D7420 *P5	IC200 J2	IC4004 E4	IC7120 M3	R223 *J2	R1040 J5	R1132 F3	R1224 G4	R1408 *F2
C504 E3	C1216 *E3	C2205 *K5	C3018 A5	C4083 *C5	C4278 D2	C7122 M3	C8006 L4	CL4201 C2	D7421 *P5	IC300 P2	IC4005 *E4	IC7140 N4	R224 *J2	R1041 J5	R1133 F3	R1225 H3	R1409 *F2
C505 E3	C1217 *E2	C2206 *K5	C3019 B5	C4090 D5	C4279 *B2	C7124 M3	C8007 L4	CL4202 C2	D7500 P4	IC301 P2	IC4006 *E4	IC7150 M4	R225 *J2	R1042 L5	R1134 F3	R1226 H3	R1410 F2
C506 E3	C1218 *E2	C2207 *L5	C3020 *A4	C4092 D5	C4280 B3	C7125 M3	C8008 L4	CL4203 C2	D7501 P4	IC302 P2	IC4007 *D4	IC7201 N3	R226 *H3	R1043 L5	R1135 G3	R1227 G3	R1411 F2
C507 E3	C1219 *E2	C2208 *H5	C3021 *B4	C4093 D5	C4281 C2	C7129 M3	C8009 L3	CL4205 B2	D8000 L4	IC500 E3	IC4008 C4	IC7210 P3	R227 *J3	R1044 L5	R1136 F3	R1228 G3	R1412 F2
C508 E3	C1222 *E2	C2209 *J5	C3022 C5	C4180 A3	C4282 *D2	C7132 *N3	C8010 L3	CL4206 B2	D8001 L3	IC501 E3	IC4009 *D5	IC7220 N3	R228 *J3	R1045 L5	R1137 F3	R1229 G3	R1413 *F2
C801 D3	C1223 *E1	C2210 *J5	C3023 *B4	C4181 A3	C4283 *C2	C7133 *N4	C8011 L3	CL4207 C1	D8002 L3	IC502 E3	IC4010 E4	IC7240 P4	R229 *H3	R1046 L5	R1138 F3	R1230 G3	R1414 F2
C802 D3	C1224 *E2	C2211 L5	C3024 *B5	C4182 A3	C4284 *C2	C7142 N4	C8050 L3	CL4208 A2	D8050 M3	IC503 E3	IC4011 *E5	IC7250 N4	R300 P2	R1047 L5	R1139 F3	R1231 H3	R1415 F2
C803 *E3	C1225 *E1	C2222 L5	C3025 *B4	C4183 A3	C4285 *C2	C7143 N4	C8051 M3	CL4209 C1	D8051 M3	IC504 E3	IC4012 D4	IC7311 *M4	R301 P2	R1048 L5	R1140 F3	R1232 H3	R1416 F2
C804 *D3	C1226 *E1	C2400 N2	C3026 K4	C4190 A2	C4286 *C2	C7145 N4	C8090 M4	CL4210 C2	D9090 *N1	IC505 E3	IC4013 E4	IC7321 *M5	R302 P2	R1049 L5	R1141 F3	R1233 G3	R1417 F2
C805 E3	C1227 *F1	C2401 N2	C3200 K4	C4191 A2	C4288 *B2	C7152 M4	C8091 M3	CL4211 A2	D9091 *N1	IC506 E3	IC4014 *E4	IC7411 *P4	R303 P2	R1050 K5	R1142 F3	R1234 G3	R1418 F2
C806 D3	C1228 E1	C2402 N2	C3201 K4	C4192 A3	C4289 *B1	C7153 M4	C9000 M1	CL4212 A2		IC507 E3	IC4015 *E5	IC7421 *P5	R304 P2	R1051 K5	R1143 F3	R1235 G3	R1419 F2
C808 E3	C1229 F1	C2403 N2	C4000 E5	C4193 A3	C4291 *B2	C7155 M4	C9001 P1	CL4213 A1	E101 A5	IC805 *E3	IC4016 E4	IC7500 *P4	R305 P3	R1052 K5	R1144 F3	R1236 G3	R1420 F2
C809 D3	C1230 G1	C2404 N2	C4001 E5	C4194 A3	C4292 *B1	C7156 M2	C9002 M1	CL4214 B2	E200 J2	IC806 *D3	IC4017 E4	IC7700 *N3	R306 P3	R1053 K5	R1145 F3	R1237 H3	R1421 *F2
C810 E3	C1231 G1	C2405 N2	C4002 E5	C4195 A3	C4294 C1	C7190 M3	C9003 M1	CL4215 A1	E300 P2	IC810 *E3	IC4018 *E4	IC8000 L3	R307 P2	R1054 K5	R1146 G3	R1238 H3	R1422 *F2
C811 D3	C1232 *F1	C2406 N2	C4005 E5	C4196 A3	C4295 C1	C7191 N3	C9004 P2	CL4216 A1	E501 *E3	IC811 *E3	IC4019 *D4	IC8002 L4	R308 P2	R1055 K5	R1147 *G2	R1239 G3	R1423 F2
C812 *D3	C1233 *G1	C2407 N2	C4006 E5	C4197 A2	C4296 *B2	C7192 M3	C9005 P1	CL4217 A1	E502 *E3	IC812 *E3	IC4020 C4	IC8050 *M3	R309 P2	R1056 K5	R1148 G3	R1240 G3	R1424 F2
C813 *D3	C1234 F1	C2408 M2	C4007 E5	C4198 A2	C4297 *C2	C7193 N3	C9006 P2	CL4218 A1	E801 E3	IC813 *D3	IC4021 *C5	IC9000 M2	R310 P2	R1057 K5	R1149 G3	R1241 G3	R1425 *F2
C814 *E3	C1251 D2	C2409 M2	C4008 E5	C4199 A2	C4298 *C2	C7201 P4	C9007 M1	CL4219 A1	E802 *D3	IC814 *D3	IC4022 D5	IC9001 P1	R311 P2	R1058 L5	R1150 *H3	R1242 G3	R1426 F2
C815 *D3	C1252 D2	C2410 M2	C4009 E5	C4200 A2	C4299 *C2	C7202 N4	C9008 M2	CL4220 A1	E803 *C3	IC815 *D3	IC4023 *D5	IC9002 N1	R312 P2	R1059 L5	R1151 G3	R1243 H3	R1427 F2
C816 D3	C1253 D2	C2411 M2	C4010 E5	C4201 B1	C4300 *B2	C7210 N3	C9009 P1	CL4221 A1	E1001 E2	IC816 *D3	IC4024 *C4	IC9003 N1	R313 P2	R1060 L5	R1152 G3	R1244 H3	R1428 F2
C817 D3	C1254 D2	C2412 N2	C4011 D4	C4203 A2	C4350 *C1	C7212 N3	C9010 P1	CL4222 A1	E1002 *E2	IC817 *E3	IC4025 *D4	IC9004 N1	R314 P2	R1061 L5	R1153 G3	R1245 G3	R1429 *F2
C818 *E3	C1255 D2	C2413 M2	C4012 E5	C4204 *A2	C4351 *C1	C7214 P3	C9011 P2	CL4223 C2	E1004 *H3	IC818 *D3	IC4026 E4	IC9005 M2	R315 P2	R1062 L5	R1154 G3	R1246 G3	R1430 F2
C819 *D3	C1256 D2	C2414 M2	C4013 F5	C4205 *B2	C4352 *C1	C7215 N3	C9012 N2	CL4224 C2	E1005 *F2	IC819 *D3	IC4091 D5	IC9006 M1	R316 P2	R1063 L5	R1155 G3	R1247 G3	R1431 F2
C820 E3	C1257 D2	C2415 N2	C4014 *E5	C4206 *C2	C4353 *C1	C7219 N3	C9013 N2	CL4225 C2	E2001 K1	IC850 *D3	IC4092 D5	IC9007 N1	R317 P2	R1064 K5	R1156 G3	R1248 G3	R1432 *F2
C821 D3	C1258 D2	C2416 N2	C4015 E5	C4207 *B1	C4360 *C1	C7220 N3	C9014 N1	CL4226 C2	E2002 L3	IC1000 G2	IC4190 A3	IC9090 *N1	R500 F3	R1065 K5	R1157 G3	R1249 H3	R1433 F2
C822 *E3	C1259 D1	C2417 M2	C4016 E5	C4208 *B1	C4361 *C1	C7222 N3	C9015 N1	CL4227 C2	E2003 *H1	IC1001 F3	IC4200 B2	IC9101 P1	R501 E3	R1066 K5	R1158 G3	R1250 H3	R1434 F2
C823 *E3	C1260 D1	C2418 N2	C4017 *E5	C4209 *B1	C4362 *C1	C7224 N3	C9016 N2	CL4228 C2	E2004 *K3	IC1002 H3	IC4201 B1		R502 E3	R1067 K5	R1159 G3	R1251 G3	R1435 F2
C824 *D3	C1261 D1	C2419 N2	C4018 E4	C4210 *A1	C4363 *C1	C7225 N3	C9017 N1	CL4229 C2	E2005 *L2	IC1003 G3	IC4203 *C2	L101 H4	R503 E3	R1068 K5	R1160 F3	R1252 G3	R1436 F2
C825 *D3	C1262 D1	C2420 N2	C4019 F4	C4211 *A2	C4380 *C1	C7229 N3	C9018 N1	CL4230 B2	E3000 *K4	IC1004 G3	IC4204 C1	L103 H4	R504 F3	R1069 K5	R1161 F3	R1253 G3	R1437 F2
C828 *E3	C1263 *E2	C2421 N2	C4020 E5	C4212 *A2	C4381 *C1	C7232 *N3	C9019 N1	CL4231 B1	E3001 H4	IC1005 L5	IC4205 *C2	L106 J5	R505 E3	R1070 K5	R1162 F3	R1254 G3	R1438 F2
C829 *D3	C1264 *E2	C2422 M2	C4021 E5	C4213 *B2	C4382 *C1	C7233 *N3	C9020 N1	CL4232 B1	E3002 K4	IC1006 K5	IC4206 A4	L107 J4	R506 E3	R1071 K5	R1163 F3	R1255 H3	R1439 F2
C830 *D3	C1265 *E2	C2423 M2	C4022 *E5	C4214 *C2	C4390 *C1	C7242 P4	C9090 N1	CL4233 B1	E4000 D4	IC1007 L5	IC4207 *B2	L220 J3	R507 E3	R1072 K5	R1164 H3	R1256 H3	R1440 F2
C831 *E3	C1266 *E2	C2424 *N2	C4023 D4	C4215 *B2	C4391 *C1	C7243 P4	C9091 N1	CL4234 C1	E4001 *E4	IC1008 J4	IC4208 *B2	L401 B4	R508 E3	R1073 K5	R1165 G3	R1257 G3	R1441 F2
C832 *D3	C1267 *E1	C2425 *N2	C4024 E4	C4216 *B1	C4392 *C1	C7245 P4	C9101 P1	CL4235 C1	E4190 A2	IC1009 K5	IC4211 *B2	L402 A4	R509 E3	R1074 K4	R1166 H3	R1258 G3	R1442 F2
C833 *D3	C1268 *E1	C2426 *N2	C4025 F4	C4217 *B1	C4393 *B1	C7252 N4	C9104 P1	CL4236 C1	E4203 B3	IC1070 E2	IC4212 *B2	L500 E3	R510 E3	R1075 K4	R1167 *H3	R1259 G3	R1443 F2
C850 D2	C1269 *E1	C2427 *N2	C4026 D4	C4218 B1	C4394 *B1	C7253 N4	C9105 P1	CL4237 B2	E4211 *A1	IC1200 E2	IC4213 *C2	L800 D3	R511 E3	R1076 K4	R1168 H2	R1260 G3	R1444 F2
C851 C3	C1270 *E1	C2428 *N2	C4027 *E5	C4219 *B1	C4395 *B1	C7255 N4	C9106 P1	CL4238 B2	E4212 B1	IC1201 E1	IC4214 *C2	L801 D3	R512 E3	R1077 J4	R1169 F3	R1261 H4	R1445 F2
C1001 F3	C1281 D2	C2429 *N2	C4028 *E4	C4220 B1	C4396 B3	C7290 N3	C9109 P1	CL4239 B1	E4290 *B1	IC1202 E1	IC4216 C1	L1291 D2	R800 E3	R1078 J4	R1170 F3	R1262 H4	R1446 *F2
C1002 G4	C1282 D1	C2430 *N2	C4029 E4	C4221 *A2	C4397 B2	C7291 P3	C9110 P1	CL4240 B1	E4370 C1	IC1203 *D2	IC4218 *B1	L1292 D1	R801 E3	R1079 J4	R1171 F3	R1263 H4	R1447 *F2
C1003 G4	C1283 D1	C2431 *N2	C4030 D4	C4222 *A2	C4400 F5	C7292 N3	C9111 P1	CL4241 B2	E4400 *G5	IC1205 *D2	IC4220 *B2	L1293 D1	R802 D3	R1080 J4	R1172 F3	R1264 H4	R1448 F2
C1004 F4	C1284 *E2	C2432 *M2	C4031 E4	C4223 *A2	C4401 *E5	C7293 P3		CL8000 L4	E4401 F4	IC1206 *D1	IC4221 *B2	L1294 E2	R803 D3	R1081 J4	R1173 F3	R1265 H4	R1449 F2
C1005 L5	C1285 *E2	C2433 *M2	C4032 E4	C4224 *A2	C4402 *F5	C7310 L4	CL500 F3		E4402 *F5	IC1207 *E1	IC4222 *C2	L1295 E2	R804 *E3	R1082 G3	R1174 F3	R1266 H4	R1450 *F2
C1006 K5	C1286 *E1	C2434 *M2	C4033 E4	C4225 A1	C4403 G5	C7311 M4	CL503 E3	CN19 M5	E4403 *D1	IC1208 F1	IC4223 *C2	L1296 E1	R805 *D3	R1083 H3	R1175 F3	R1267 H4	R1451 *F2
C1007 K5	C1291 D2	C2435 *M2	C4034 *F5	C4226 B2	C4404 *F5	C7312 *M4	CL504 F3	CN20 G5	E4407 *C2	IC1209 *G1	IC4291 *B1	L2400 N2	R806 E3	R1084 G3	R1176 F3	R1268 H4	R1452 F2
C1008 J4	C1292 D1	C2436 N2	C4035 *E4	C4227 B1	C4405 G5	C7313 *M4	CL1000 F3	CN21 C5	E4408 *D1	IC2000 K2	IC4292 *B1	L2401 M2	R807 D3	R1085 G3	R1177 F3	R1269 G4	R1453 F2
C1009 K5	C1293 D1	C2437 N2	C4036 D4	C4228 B1	C4406 F5	C7320 M5	CL1001 F3	CN3000 *A4	E4450 *D2	IC2070 J2	IC4293 *B1	L2402 M2	R808 E3	R1086 G3	R1178 F3	R1270 G4	R1454 F2
C1041 *G2	C1294 E2	C2438 M2	C4037 E4	C4229 *A1	C4407 *G5	C7321 L5	CL1002 G3		E7100 N4	IC2200 *L5	IC4350 *C1	L2403 N2	R809 D3	R1087 G3	R1179 F3	R1271 G4	R1455 F2
C1042 *G2	C1295 E2	C2439 *N2	C4038 E4	C4230 *A2	C4408 G5	C7322 *M5	CL1003 G4	D300 P2	E7131 N3	IC2201 *L4	IC4351 *C1	L2404 M2	R810 *D3	R1088 *H3	R1180 F3	R1272 G4	R1456 *F2
C1043 *G2	C1296 E1	C2440 *N2	C4039 E4	C4231 *A2	C4409 *G5	C7323 *L5	CL1100 C5	D301 P2	E7200 N4	IC2202 J5	IC4352 *C1	L2405 M2	R811 *D3	R1089 G3	R1181 F3	R1273 G4	R1457 *F2
C1044 *G2	C2041 *K2	C2441 *M2	C4040 E4	C4232 A1	C4410 G5	C7350 M4	CL1101 C5	D850 D3	E7231 P3	IC2203 *L4	IC4353 *C1	L4002 E5	R812 *E3	R1090 *H2	R1182 F3	R1274 G4	R1458 F3
C1050 H2	C2042 *K2	C2442 *N2	C4041 E4	C4233 *B2	C4411 *G5	C7351 L4	CL1102 C5	D851 *D2	E8001 L4	IC2204 *K5	IC4360 *C1	L4003 *E5	R813 *D3	R1091 H3	R1183 F3	R1275 G4	R1459 F3
C1051 H2	C2043 *K2	C2443 *N2	C4042 *E4	C4234 *B2	C4412 G5	C7352 L4	CL1103 C5	D1070 F2	E9001 N2	IC2205 *K5	IC4361 *C1	L4004 *E4	R1000 J5	R1092 H3	R1184 F3	R1276 G4	R1460 *F2
C1052 H2	C2044 *K2	C2444 *N2	C4043 *E4	C4235 *B2	C4413 *G5	C7360 L5	CL1104 C5	D1071 E2	E9002 K1	IC2206 *K5	IC4362 *C1	L4005 *D4	R1001 K5	R1093 H3	R1185 F3	R1277 G4	R1461 *F2
C1053 H2	C2050 L2	C2445 *N2	C4044 *E4	C4236 *B2	C4414 G5	C7361 M5	CL1105 C5	D1202 G1	E9003 K1	IC2207 *H5	IC4363 *C1	L4190 A2	R1002 K5	R1094 H3	R1186 F3	R1278 G4	R1462 *F2
C1054 H2	C2051 L2	C2446 *M2	C4045 *D4	C4237 *B1	C4415 G5	C7362 M5	CL1106 C5	D1203 G1	E9004 *N2	IC2208 *J5	IC4391 B3	L7095 P3	R1003 K5	R1095 H3	R1187 H3	R1279 G4	R1463 *F2
C1055 H2	C2052 L2	C2447 *M2	C4046 *E4	C4238 *B2	C4416 G5	C7410 P4	CL1107 C5	D1204 G1	E9005 P2	IC2209 *J5	IC4392 C2	L7150 M3	R1004 K5	R1096 H3	R1188 H3	R1280 G4	R1464 *F2
C1056 H2	C2053 L2	C2448 J1	C4047 *E4	C4239 *B2	C4417 G5	C7411 P4	CL1108 C5	D1205 G1		IC2210 L5	IC4394 B3	L7250 N3	R1005 K5	R1097 H3	R1189 H3	R1281 G4	R1465 F2
C1061 *G2	C2054 L2	C2449 H1	C4048 *E4	C4240 *B1	C4418 F5	C7412 *P4	CL1109 M5	D2070 H2	F101 G4	IC2400 P2	IC4401 G5	L8090 *M4	R1006 K5	R1098 *F3	R1190 H3	R1282 G4	R1466 F2
C1062 *G2	C2055 L2	C2450 *J1	C4049 *D4	C4241 *B1	C4419 F5	C7413 *P4	CL1110 M5	D2071 *J2	F102 H5	IC2401 N2	IC4402 *G5	L8091 *M3	R1007 K5	R1099 G3	R1191 H3	R1283 G4	R1467 *F2
C1063 *G2	C2056 L2	C2451 *J1	C4050 *E4	C4242 *C2	C4420 *G5	C7420 P5	CL1111 M5	D2200 H1	F105 J5	IC2402 M2	IC4403 D1	L9000 M1	R1008 K5	R1100 *F2	R1192 H3	R1284 F4	R1468 *F2
C1064 *G2	C2061 *K2	C2452 K1	C4051 *E4	C4243 *C1	C4421 *G5	C7421 P5	CL1112 M5	D2201 H1	F106 J5	IC2403 *P2	IC4404 D1	L9001 N1	R1009 L5	R1101 G3	R1193 H3	R1285 F2	R1469 *F2
C1070 F2	C2062 *K2	C2453 K1	C4052 *D4	C4244 *C2	C4422 *G5	C7422 *P5	CL1113 M5	D4000 *E4	F401 A4	IC2404 *N2	IC4405 *D1	L9002 N1	R1010 L5	R1102 *F2	R1194 G3	R1286 *H2	R1470 *F2

R1471	*F2	R1563	*D3	R1655	G1	R1747	*F1	R1839	*F1	R2040	J2	R2280	*K5	R2400	J2	R2517	*P2	R2609	*J1	R2701	K1	R2793	*H1	R2885	*M1	R2977	L1	R3070	A5	R3162	*B4	R4028	E4	R4217	C1
R1472	*F2	R1564	*D3	R1656	H1	R1748	*F1	R1840	*G1	R2041	*J3	R2281	*K5	R2401	J2	R2518	*P2	R2610	*J1	R2702	K1	R2794	*H1	R2886	*M1	R2978	L1	R3071	B5	R3163	*B4	R4029	E4	R4218	C1
R1473	G1	R1565	*D3	R1657	H1	R1749	*F1	R1841	*G1	R2042	*J3	R2282	*K5	R2402	*K2	R2519	*P2	R2611	*J1	R2703	K1	R2795	*H1	R2887	*M1	R2979	L1	R3072	B5	R3164	*B4	R4030	E4	R4219	C2
R1474	G1	R1566	*D3	R1658	G2	R1750	*F1	R1842	*G1	R2050	J2	R2283	*K5	R2403	*K2	R2520	*P2	R2612	*J1	R2704	K1	R2796	*H1	R2888	*M1	R2980	L1	R3073	B5	R3165	*B4	R4031	*F5	R4220	C2
R1475	G1	R1567	*D3	R1659	*G2	R1751	*F1	R1843	*G1	R2051	J2	R2284	*K5	R2404	*L2	R2521	*P2	R2613	*J1	R2705	K1	R2797	*H1	R2889	*M1	R2981	L1	R3074	B5	R3167	*B4	R4032	D4	R4221	A1
R1476	G1	R1568	*D3	R1660	*G2	R1752	*E1	R1844	*G1	R2052	J2	R2285	*K5	R2405	L2	R2522	*P2	R2614	*J1	R2706	K1	R2798	*G1	R2890	*M1	R2982	L1	R3075	B5	R3168	B4	R4033	D4	R4222	A1
R1477	F2	R1569	*E2	R1661	G2	R1753	*E1	R1845	*G1	R2090	*L2	R2286	*K5	R2406	L2	R2523	*P2	R2615	H1	R2707	K1	R2799	*G1	R2891	*M1	R2983	L1	R3076	B5	R3169	J4	R4034	*E4	R4223	A1
R1478	F2	R1570	*E2	R1662	G1	R1754	*E1	R1846	*G1	R2091	*L2	R2287	*L5	R2407	L2	R2524	*N2	R2616	H1	R2708	K1	R2800	*G1	R2892	*L1	R2984	L1	R3077	C5	R3170	*J4	R4035	E4	R4224	A1
R1479	F2	R1571	*E2	R1663	G2	R1755	*E1	R1847	*G1	R2092	*L2	R2288	*L5	R2408	L2	R2525	*N2	R2617	H1	R2709	*K1	R2801	*G1	R2893	*L1	R2985	L1	R3078	B5	R3171	*J4	R4036	D4	R4225	A1
R1480	F2	R1572	*E2	R1664	G2	R1756	*E1	R1848	*F1	R2093	*L2	R2289	*L5	R2410	L2	R2526	*N2	R2618	H1	R2710	*K1	R2802	*G1	R2894	*L1	R2986	L1	R3079	A4	R3172	H3	R4037	E4	R4226	A1
R1481	D2	R1573	*E2	R1665	*G2	R1757	*E1	R1849	*F1	R2094	*L2	R2290	*L5	R2411	L2	R2527	*N2	R2619	H1	R2711	*K1	R2803	*G1	R2895	*L1	R2987	L1	R3080	A5	R3173	J3	R4038	E4	R4227	A1
R1482	D2	R1574	*E2	R1666	*G2	R1758	*E1	R1850	*F1	R2095	*L2	R2291	*L5	R2412	L2	R2528	*N2	R2620	H1	R2712	*K1	R2804	*G1	R2896	*L1	R2988	L1	R3081	B5	R3174	J4	R4039	E4	R4228	A1
R1483	D2	R1575	*D2	R1667	G1	R1759	*E1	R1851	*F1	R2096	*L2	R2292	*K5	R2413	L2	R2529	*N2	R2621	H1	R2713	*K1	R2805	*G1	R2897	*L1	R2989	L1	R3082	A4	R3175	J4	R4040	*E4	R4229	A2
R1484	D2	R1576	*D2	R1668	G1	R1760	F1	R1852	*F1	R2097	*L2	R2293	*H5	R2414	L2	R2530	*N2	R2622	H1	R2714	*K1	R2806	K1	R2898	*L1	R2990	L1	R3083	A4	R3176	J4	R4041	*E4	R4230	A2
R1485	E2	R1577	*D2	R1669	*G2	R1761	F1	R1853	*F1	R2200	*L5	R2294	*H5	R2415	L2	R2531	*N2	R2623	J1	R2715	*K1	R2807	K2	R2899	*L1	R2991	L1	R3084	A4	R3177	K4	R4042	E4	R4231	A2
R1486	E2	R1578	*D2	R1670	*G2	R1762	G1	R1854	*F1	R2201	*L5	R2295	*H5	R2416	L2	R2532	*N2	R2624	J1	R2716	*K1	R2808	K1	R2900	*N1	R2992	L1	R3085	A4	R3178	H3	R4043	E4	R4232	A2
R1487	E2	R1579	*D2	R1671	*G2	R1763	G1	R1855	*F1	R2202	*L5	R2296	*H5	R2417	L2	R2533	*M2	R2625	J1	R2717	*K1	R2809	*K2	R2901	*N1	R2993	L1	R3086	A4	R3179	K4	R4044	*D4	R4233	A2
R1488	E2	R1580	*D2	R1672	F2	R1764	G1	R1856	*F1	R2203	*L5	R2297	*H5	R2418	*L2	R2534	*M2	R2626	J1	R2718	*K1	R2810	*K2	R2902	*N1	R2994	K1	R3087	A4	R3180	K4	R4045	*E4	R4234	A2
R1489	E2	R1581	*D2	R1673	*G2	R1765	G1	R1857	*F1	R2204	*L5	R2298	*H5	R2419	L2	R2535	*M2	R2627	J1	R2719	*K1	R2811	K2	R2903	*N1	R2995	*K2	R3088	A4	R3181	*B4	R4046	*D4	R4235	A2
R1490	E2	R1582	*E1	R1674	*G2	R1766	G1	R1858	*F1	R2205	*L5	R2301	*J5	R2420	L2	R2536	*M2	R2628	J1	R2720	*K1	R2812	K2	R2904	*N1	R2996	K2	R3089	A4	R3182	*B4	R4047	*D4	R4236	A2
R1491	E2	R1583	*E1	R1675	*G2	R1767	G1	R1859	*G1	R2206	*L5	R2302	*J5	R2421	L2	R2537	*M2	R2629	J1	R2721	*K1	R2813	*K2	R2905	*N1	R2998	*K2	R3090	B4	R3187	J4	R4048	*D4	R4237	A2
R1492	E2	R1584	*E1	R1676	*E1	R1768	G1	R1860	*F1	R2207	*L5	R2303	*J5	R2422	*L2	R2538	*M2	R2630	J1	R2722	*K1	R2814	K2	R2906	*N1	R2999	*K2	R3091	*J4	R3190	C5	R4049	*E4	R4238	A2
R1493	E2	R1585	*E1	R1677	*F1	R1769	F1	R1861	*G1	R2208	*L5	R2304	*J5	R2423	L2	R2539	*M2	R2631	*J1	R2723	*K1	R2815	*K2	R2907	*N1	R3000	*J3	R3092	B4	R3191	*B4	R4050	*D4	R4239	A2
R1494	D2	R1586	*E1	R1678	*F1	R1770	F1	R1862	*G1	R2209	*L5	R2305	*J5	R2424	*L2	R2540	*M2	R2632	*J1	R2724	*K1	R2816	K1	R2908	*M1	R3001	*J3	R3093	B4	R3192	*B4	R4051	*E4	R4240	A2
R1495	D2	R1587	*E1	R1679	*F1	R1771	F1	R1863	*H2	R2210	*L5	R2306	*J5	R2425	*L2	R2541	*M2	R2633	*J1	R2725	G1	R2817	L2	R2909	*M1	R3002	*J3	R3094	B4	R3199	B5	R4052	*E4	R4241	A2
R1496	D2	R1588	*D1	R1680	*F1	R1772	F1	R1864	H2	R2211	*L5	R2307	*J5	R2426	*L2	R2542	*N2	R2634	*J1	R2726	G1	R2818	L1	R2910	*M1	R3003	*J4	R3095	B4	R3200	H3	R4053	*E4	R4242	A2
R1497	D2	R1589	*D1	R1681	*F1	R1773	F1	R1865	H2	R2212	J5	R2308	*J5	R2430	K2	R2543	*N2	R2635	*J1	R2727	G1	R2819	K1	R2911	*M1	R3004	*J4	R3096	B5	R3201	H3	R4054	*E4	R4243	A2
R1498	E2	R1590	*D1	R1682	*F1	R1774	F1	R1866	*H2	R2213	J5	R2309	*K5	R2431	K1	R2544	*P2	R2636	*J1	R2728	G1	R2820	K1	R2912	*M1	R3005	*J4	R3097	B4	R3202	H3	R4055	D4	R4244	A2
R1499	E2	R1591	*D1	R1683	*F1	R1775	F1	R1867	H2	R2214	*L5	R2310	*K5	R2432	K2	R2545	*P2	R2637	*J1	R2729	G1	R2821	L2	R2913	*M1	R3006	*A4	R3098	H3	R3203	H3	R4056	D4	R4245	A2
R1500	E2	R1592	*D1	R1684	*F1	R1776	F1	R1868	H2	R2215	*L5	R2311	*K5	R2433	K2	R2546	*P2	R2638	*J1	R2730	G1	R2822	K1	R2914	*M1	R3007	*A4	R3099	J3	R3204	H3	R4057	D4	R4246	A2
R1501	E2	R1593	*D1	R1685	*E1	R1777	F1	R1869	*H2	R2216	J5	R2312	*K5	R2434	K1	R2547	*P2	R2639	*J1	R2731	G1	R2823	L1	R2915	*M1	R3008	*A4	R3100	J3	R3205	H3	R4058	D4	R4247	A2
R1502	E2	R1594	*D1	R1686	*E1	R1778	F1	R1870	H2	R2217	J5	R2313	*J5	R2435	K1	R2548	*P2	R2640	*J1	R2732	G1	R2824	K2	R2916	*M1	R3009	*A4	R3101	H3	R3206	H3	R4059	D4	R4248	A2
R1503	E2	R1595	*E2	R1687	*E1	R1779	F1	R1871	H2	R2218	*K5	R2314	*J5	R2457	L2	R2549	*P2	R2641	*J1	R2733	H1	R2825	K2	R2917	*M1	R3010	*B4	R3102	J3	R3207	H3	R4060	D4	R4249	A2
R1504	E2	R1596	*E2	R1688	*E1	R1780	G1	R1872	*H2	R2219	*K5	R2315	*J5	R2458	L2	R2550	*P2	R2642	*J1	R2734	H1	R2826	*K2	R2918	*M1	R3011	*B4	R3103	H3	R3208	H4	R4061	D4	R4250	A1
R1505	E2	R1597	*E2	R1689	*E1	R1781	F1	R1873	H2	R2220	M5	R2316	*J5	R2459	L2	R2551	*N2	R2643	*J1	R2735	H1	R2827	K2	R2919	*N1	R3012	*B4	R3104	J3	R3209	H4	R4062	D4	R4251	A1
R1506	E2	R1598	*E2	R1690	*E1	R1782	G1	R1874	H2	R2221	M5	R2317	*K2	R2460	L2	R2552	*N2	R2644	*J1	R2736	H1	R2828	*K2	R2920	*M1	R3013	*B4	R3105	H3	R3210	H4	R4063	D4	R4252	A2
R1507	D1	R1599	*D2	R1691	*E1	R1783	G1	R1875	H2	R2223	L5	R2318	J2	R2461	N2	R2553	*N2	R2645	*J1	R2737	H1	R2829	K2	R2921	*N1	R3014	*A4	R3106	J3	R3211	H4	R4064	D4	R4253	A2
R1508	D1	R1600	*D2	R1692	*E1	R1784	G1	R1876	*H2	R2224	L5	R2319	J2	R2462	N2	R2554	*N2	R2646	*J1	R2738	H1	R2830	*K2	R2922	*N1	R3015	*B4	R3107	H3	R3212	H4	R4065	D4	R4254	B2
R1509	D1	R1601	*D2	R1693	*E1	R1785	G1	R1877	*H2	R2225	L5	R2320	*K2	R2463	P2	R2555	*N2	R2647	J1	R2739	H1	R2831	K1	R2923	L2	R3016	*B4	R3108	J3	R3213	H4	R4066	E4	R4255	B2
R1510	D1	R1602	*D2	R1694	*E1	R1786	G1	R1878	H2	R2226	*L2	R2321	J2	R2464	P2	R2556	*N2	R2648	J1	R2740	H1	R2832	*K2	R2924	*K2	R3017	*B4	R3109	H4	R3214	H4	R4067	E4	R4256	B2
R1511	E1	R1603	*D2	R1695	*E1	R1787	G1	R1879	H2	R2227	*L2	R2322	J2	R2465	P2	R2557	*N2	R2649	J1	R2741	H1	R2833	K2	R2925	*K2	R3018	*A4	R3110	J4	R3215	H4	R4068	*C4	R4257	B1
R1512	E1	R1604	*D2	R1696	*F1	R1788	G1	R1880	*H2	R2229	*K5	R2323	J2	R2466	P2	R2558	*N2	R2650	J1	R2742	H1	R2834	K2	R2926	L1	R3019	C5	R3111	H4	R3247	K3	R4069	C4	R4258	C2
R1513	E1	R1605	*D2	R1697	*E1	R1789	G1	R1881	H2	R2230	J5	R2324	J2	R2467	P2	R2559	*N2	R2651	J1	R2743	H1	R2835	*K2	R2927	*K2	R3020	C5	R3112	J4	R3248	J3	R4070	C4	R4259	C2
R1514	E1	R1606	*D2	R1698	*F1	R1790	G1	R1882	*H2	R2231	*K2	R2325	J2	R2468	P2	R2560	*M2	R2652	J1	R2744	G1	R2836	K2	R2928	*K2	R3021	A5	R3113	H4	R3249	J3	R4071	C4	R4260	C2
R1515	E1	R1607	*E2	R1699	*F1	R1791	G1	R1883	H2	R2232	*K2	R2326	J2	R2469	P2	R2561	*M2	R2653	J1	R2745	H1	R2837	K1	R2929	L1	R3022	A5	R3114	J4	R3250	J3	R4072	C4	R4261	C2
R1516	E1	R1608	*E2	R1700	*G2	R1792	F1	R1884	H2	R2233	*K2	R2327	J2	R2470	N2	R2562	*M2	R2654	J1	R2746	G1	R2838	K1	R2930	L2	R3023	A5	R3115	H4	R3251	J3	R4073	C4	R4262	C2
R1517	E1	R1609	*E2	R1701	*G2	R1793	F1	R1885	H2	R2234	K3	R2328	J2	R2471	N2	R2563	*M2	R2655	K1	R2747	G1	R2839	*K2	R2931	L1	R3024	A5	R3116	J4	R3252	*J3	R4074	C4	R4263	*B1
R1518	E1	R1610	*E2	R1702	H2	R1794	F1	R1886	*H2	R2235	*K2	R2329	*K2	R2472	N2	R2564	*M2	R2656	K1	R2748	G1	R2840	K1	R2932	L2	R3025	B5	R3117	J4	R3260	J3	R4075	*C4	R4264	*B1
R1519	E1	R1611	*D2	R1703	*G2	R1795	F1	R1887	H2	R2236	*K2	R2330	J2	R2473	N2	R2565	*M2	R2657	K1	R2749	G1	R2841	K2	R2933	L1	R3026	B5	R3118	H4	R3261	J3	R4076	D4	R4265	*C2
R1520	D2	R1612	*D2	R1704	G2	R1796	F1	R1888	*H2	R2237	K3	R2331	J2	R2474	N2	R2566	*M2	R2658	K1	R2750	G1	R2842	*K2	R2934	L2	R3027	B5	R3119	J4	R3263	J3	R4077	*C4	R4266	*B1
R1521	D2	R1613	*D2	R1705	G1	R1797	F1	R1889	H2	R2238	K3	R2332	J2	R2475	N2	R2567	*M2	R2659	K1	R2751	G1	R2843	K1	R2935	*L2	R3028	B5	R3120	H4	R3264	K4	R4078	*C4	R4267	*B1
R1522	E2	R1614	*D2	R1706	G1	R1798	F1	R1890	*H2	R2239	J2	R2333	*K2	R2476	N2	R2568	*M2	R2660	K1	R2752	G1	R2844	K2	R2936	*L2	R3029	B5	R3121	J4	R3265	K3	R4079	*C5	R4268	*B1
R1523	E2	R1615	*D2	R1707	*G2	R1799	F1	R1891	*H2	R2240	J2	R2334	*K2	R2477	N2	R2569	H1	R2661	K1	R2753	G1	R2845	*K2	R2937	L1	R3030	B5	R3122	H4	R3268	J3	R4080	*C5	R4269	*B1
R1524	E2	R1616	*D2	R1708	*G2	R1800	H2	R1892	*G1	R2241	L3	R2335	*K2	R2478	N2	R2570	H1	R2662	K1	R2754	G1	R2846	*K2	R2938	L2	R3031	B5	R3123	J4	R3269	J3	R4081	*C5	R4270	*C2
R1525	E2	R1617	*D2	R1709	G2	R1801	H2	R1893	*G1	R2242	L3	R2336	*K2	R2479	M2	R2571	H1	R2663	K1	R2755	G1	R2847	K2	R2939	*N1	R3032	B5	R3124	J4	R3270	J4	R4082	D5	R4271	*C2
R1526	E2	R1618	*D2	R1710	G1	R1802	H2	R1894	*G1	R2243	K3	R2337	J2	R2480	M2	R2572	H1	R2664	K1	R2756	H1	R2848	*K2	R2940	*N1	R3033	B5	R3125	H4	R3273	J3	R4083	*C4	R4272	*C2
R1527	E2	R1619	*E1	R1711	G2	R1803	H2	R1895	*G1	R2244	K3	R2338	J2	R2481	M2	R2573	H1	R2665	K1	R2757	H1	R2849	*K2	R2941	*N1	R3034	B5	R3126	H4	R3275	*J3	R4084	D4	R4273	*C2
R1528	E2	R1620	*E1	R1712	*G2	R1804	H2	R1896	*G1	R2245	K3	R2339	J2	R2482	M2	R2574	H1	R2666	J1	R2758	H1	R2850	K1	R2942	*N1	R3035	B5	R3127	J4	R3276	H3	R4085	*C4	R4274	*C2
R1529	E2	R1621	*E1	R1713	G1	R1805	H2	R1897	*G1	R2246	J3	R2340	J2	R2483	M2	R2575	H1	R2667	K1	R2759	H1	R2851	*K2	R2943	*N1	R3036	B5	R3128	J4	R3277	K3	R4086	*C4	R4275	*C2
R1530	E2	R1622	*E1	R1714	G2	R1806	*G2	R1898	*G1	R2247	L3	R2341	*K2	R2484	M2	R2576	H1	R2668	J1	R2760	H1	R2852	*K2	R2944	*N1	R3037	B5	R3129	J4	R3278	J3	R4087	*D5	R4276	*B1
R1531	E2	R1623	*D1	R1715	G1	R1807	H1	R1899	*G1	R2248	L3	R2342	J2	R2485	M2	R2577	J1	R2669	J1	R2761	H1	R2853	K1	R2945	*N1	R3038	B5	R3130	J4	R3279	J3	R4088	*D5	R4277	*B1
R1532	D1	R1624	*D1	R1716	G2	R1808	H2	R1900	*F1	R2249	J2	R2343	J2	R2486	M2	R2578	J1	R2670	*K1	R2762	H1	R2854	*K2	R2946	*N1	R3039	A5	R3131	J4	R3280	J3	R4089	*D5	R4278	*C2
R1533	D1	R1625	*D1	R1717	*G2	R1809	*G2	R1901	*F1	R2250	*K2	R2344	J2	R2487	M2	R2579	J1	R2671	*K1	R2763	H1	R2855	K1	R2947	*M1	R3040	B5	R3132	J4	R3281	J3	R4090	*D5	R4279	*C2
R1534	E1	R1626	*D1	R1718	*G2	R1810	H1	R1902	*F1	R2251	*K2	R2345	J2	R2488	N2	R2580	J1	R2672	*K1	R2764	*H1	R2856	*K2	R2948	*M1	R3041	A4	R3133	J4	R3282	H3	R4091	*D4	R4280	C1
R1535	E1	R1627	*D1	R1719	G2	R1811	H2	R1903	*F1	R2252	*K2	R2346	J2	R2489	N2	R2581	J1	R2673	*K1	R2765	*H1	R2857	*K2	R2949	*M1	R3042	A4	R3134	J4	R4000	E5	R4180	A3	R4281	C1
R1536	E1	R1628	*D1	R1720	G1	R1812	H2	R1904	*F1	R2253	*K2	R2350	J2	R2490	N2	R2582	J1	R2674	*K1	R2766	*H1	R2858	K2	R2950	*M1	R3043	A4	R3135	J4	R4001	E5	R4181	A3	R4282	C1
R1537	E1	R1629	*D1	R1721	G2	R1813	H2	R1905	*F1	R2254	L3	R2351	J2	R2491	P2	R2583	J1	R2675	*K1	R2767	*H1	R2859	K1	R2951	*M1	R3044	A4	R3136	J4	R4002	E5	R4190	A3	R4283	*C2
R1538	E1	R1630	*D1	R1722	H2	R1814	*H2	R1906	*F1	R2255	L3	R2352	J2	R2492	P2	R2584	J1	R2676	*K1	R2768	*H1	R2860	K2	R2952	*M1	R3045	B4	R3137	J4	R4003	E5	R4191	A3	R4284	*C2
R1539	E1	R1631	G1	R1723	H2	R1815	*H2	R1907	*F1	R2256	L3	R2353	J2	R2493	P2	R2585	J1	R2677	*K1	R2769	*H1	R2861	*M1	R2953	*M1	R3046	B4	R3138	J4	R4004	E5	R4192	A3	R4285	*C2
R1540	E1	R1632	G1	R1724	H1	R1816	H2	R1908	H3	R2257	L3	R2354	J2	R2494	P2	R2586	J1	R2678	*K1	R2770	*H1	R2862	*M1	R2954	*M1	R3047	B4	R3139	J4	R4005	E5	R4194	A3	R4286	*C2
R1541	E1	R1633	*F2	R1725	G2	R1817	*H2	R1909	H3	R2258	L3	R2367	K2	R2495	P2	R2587	J1	R2679	*K1	R2771	*H1	R2863	*M1	R2955	L1	R3048	B4	R3140	J4	R4006	*E5	R4195	A3	R4287	C1
R1542	E1	R1634	F2	R1726	F1	R1818	H2	R1910	H2	R2259	*K5	R2368	*K2	R2496	P2	R2588	H1	R2680	*K1	R2772	*G1	R2864	*M1	R2956	L1	R3049	B4	R3141	J4	R4007	*E5	R4196	A2	R4288	C1
R1543	E1	R1635	F2	R1727	F2	R1819	H2	R1911	H2	R2260	*K5	R2369	J2	R2497	N2	R2589	J1	R2681	*K1	R2773	*G1	R2865	*M1	R2957	L1	R3050	B4	R3142	J4	R4008	F5	R4197	*A3	R4291	*B1
R1544	D1	R1636	*F2	R1728	*G2	R1820	*H2	R1912	H2	R2261	K3	R2370	J2	R2498	N2	R2590	H1	R2682	*K1	R2774	*G1	R2866	*M1	R2958	L1	R3051	B4	R3143	H4	R4009	*E5	R4198	*A3	R4292	*B1
R1545	D1	R1637	F1	R1729	*F2	R1821	*H2	R1913	H2	R2262	K3	R2372	H1	R2499	N2	R2591	H1	R2683	*K1	R2775	*G1	R2867	*M1	R2959	L1	R3052	B4	R3144	J4	R4010	*E5	R4199	*A3	R4293	*B1
R1546	E1	R1638	F1	R1730	G1	R1822	H2	R1914	*H2	R2263	J3	R2375	H1	R2500	N2	R2592	*J1	R2684	*K1	R2776	*G1	R2868	*M1	R2960	L1	R3053	B4	R3145	J4	R4011	E5	R4200	B2	R4296	*C2
R1547	E1	R1639	F1	R1731	G2	R1823	H2	R1915	*H2	R2264	K3	R2380	*K2	R2501	N2	R2593	*J1	R2685	*K1	R2777	*G1	R2869	*L1	R2961	L1	R3054	B4	R3146	J4	R4012	*E5	R4201	B2	R4297	*C1
R1548	E1	R1640	F1	R1732	*G2	R1824	H2	R1916	H2	R2265	*L5	R2381	*K2	R2502	N2	R2594	*J1	R2686	*K1	R2778	*G1	R2870	*L1	R2962	L1	R3055	B4	R3147	J4	R4013	*D5	R4202	C2	R4298	*C1
R1549	E1	R1641	G1	R1733	*G2	R1825	H2	R1917	H2	R2266	*K5	R2382	J2	R2503	N2	R2595	*J1	R2687	*K1	R2779	*G1	R2871	*L1	R2963	L1	R3056	B4	R3148	J4	R4014	E4	R4203	B2	R4299	*B2
R1550	E1	R1642	G2	R1734	G1	R1826	H2	R1918	H2	R2267	*K5	R2383	J2	R2504	N2	R2596	*J1	R2688	*K1	R2780	*G1	R2872	*L1	R2964	L1	R3057	C4	R3149	H4	R4015	*E5	R4204	B2	R4300	*B2
R1551	E1	R1643	*G2	R1735	G2	R1827	H2	R1919	H2	R2268	*L5	R2384	*K2	R2505	N2	R2597	*J1	R2689	*K1	R2781	*G1	R2873	*L1	R2965	L1	R3058	C4	R3150	H4	R4016	E4	R4205	A2	R4301	*C2
R1552	E1	R1644	G1	R1736	*G2	R1828	H2	R1920	*H2	R2269	*L5	R2385	J2	R2506	M2	R2598	*J1	R2690	*K1	R2782	*G1	R2874	*L1	R2966	L1	R3059	C5	R3151	C5	R4017	E4	R4206	C1	R4302	*C2
R1553	E1	R1645	G2	R1737	G1	R1829	*H2	R1921	H2	R2270	*L5	R2390	*K2	R2507	M2	R2599	*J1	R2691	*K1	R2783	*H1	R2875	*L1	R2967	L1	R3060	C5	R3152	J4	R4018	E5	R4207	C1	R4303	*C1
R1554	E1	R1646	*G2	R1738	G2	R1830	H2	R2031	J2	R2271	*L5	R2391	*K2	R2508	M2	R2600	*J1	R2692	*K1	R2784	*G1	R2876	*L1	R2968	L1	R3061	C4	R3153	*B4	R4019	D4	R4208	C1	R4304	*C1
R1555	E1	R1647	F2	R1739	G2	R1831	*H2	R2032	J2	R2272	*L5	R2392	*K2	R2509	M2	R2601	*J1	R2693	J1	R2785	*H1	R2877	*L1	R2969	L1	R3062	B4	R3154	*B4	R4020	*E4	R4209	C2	R4305	*B2
R1556	*E2	R1648	G1	R1740	G1	R1832	H2	R2033	J2	R2273	*L5	R2393	J2	R2510	M2	R2602	*J1	R2694	J1	R2786	*H1	R2878	*L1	R2970	L1	R3063	A5	R3155	*A4	R4021	*E5	R4210	B2	R4306	*B2
R1557	*E3	R1649	G2	R1741	G2	R1833	H1	R2034	*K2	R2274	*L5	R2394	J2	R2511	M2	R2603	*J1	R2695	J1	R2787	J1	R2879	*L1	R2971	L1	R3064	A5	R3156	*A4	R4022	E4	R4211	A1	R4307	*B2
R1558	*E3	R1650	*G2	R1742	*G2	R1834	H2	R2035	J2	R2275	*K5	R2395	*K2	R2512	M2	R2604	*J1	R2696	J1	R2788	J1	R2880	*M1	R2972	L1	R3065	A5	R3157	*J4	R4023	E4	R4212	C2	R4308	*B2
R1559	*E3	R1651	*G2	R1743	G1	R1835	H2	R2036	*J3	R2276	*K5	R2396	*K2	R2513	M2	R2605	*J1	R2697	J1	R2789	J1	R2881	*L1	R2973	L1	R3066	A5	R3158	*B4	R4024	E4	R4213	B2	R4309	*B2
R1560	*E3	R1652	*G2	R1744	*F1	R1836	H2	R2037	*J3	R2277	*K5	R2397	*K2	R2514	M2	R2606	*J1	R2698	J1	R2790	*H1	R2882	*M1	R2974	L1	R3067	A5	R3159	J4	R4025	E4	R4214	C1	R4310	*B2
R1561	*E3	R1653	G2	R1745	*F1	R1837	*H2	R2038	J2	R2278	*K5	R2398	J2	R2515	*N2	R2607	*J1	R2699	J1	R2791	*H1	R2883	*M1	R2975	L1	R3068	A5	R3160	*A4	R4026	E4	R4215	C1	R4311	*B2
R1562	*D3	R1654	G1	R1746	*F1	R1838	*H2	R2039	J2	R2279	*K5	R2399	*K2	R2516	*N2	R2608	*J1	R2700	J1	R2792	*H1	R2884	*M1	R2976	L1	R3069	A5	R3161	*A4	R4027	E4	R4216	B2	R4312	*B2

R4313	*B2	R4449	D1	R7118	N3	R7315	*L4	R9115	P1	TP4003	D4
R4314	*B2	R4450	D1	R7119	M3	R7316	*M4	R9116	P1	TP4004	C4
R4315	*C2	R4451	*D1	R7120	M3	R7317	*L4	R9117	P1	TP4005	D4
R4316	*C2	R4452	*D1	R7121	M3	R7318	*M4	R9118	P1	TP4007	D5
R4317	*C2	R4453	*D1	R7122	M3	R7320	*M4	R9122	P1	TP4190	A2
R4318	*C2	R4454	*D1	R7123	M3	R7321	*L4	R9123	P1	TP4200	C2
R4319	*B1	R4455	*D1	R7124	M3	R7322	*M5	R9124	P1	TP4201	C2
R4320	*B1	R4456	*D1	R7125	M3	R7323	*L5	R9126	P1	TP4202	C2
R4321	*B1	R4457	*D1	R7126	M3	R7324	*M5	R9127	P1	TP4204	A1
R4322	*B1	R4458	*D1	R7127	M3	R7325	*M5	R9128	P1	TP4205	A1
R4323	A2	R4463	D1	R7128	M3	R7326	*M5	R9129	P1	TP4206	A1
R4324	*C1	R4464	D1	R7129	M3	R7327	*M5	R9130	P1	TP4207	C2
R4325	*C1	R4465	D1	R7130	*M3	R7328	*L5	R9150	P1	TP4208	A1
R4326	*C2	R4466	D1	R7131	*M3	R7410	*P4	R9151	P1	TP4209	C2
R4327	*C2	R4468	D1	R7132	*N3	R7411	*P4			TP4210	A1
R4350	*C1	R4469	D1	R7133	*N4	R7412	*P4	RB300	P2	TP4213	C1
R4351	*C1	R4472	D1	R7135	*N4	R7413	*P4	RB1000	*F3	TP4214	C1
R4352	*C1	R4473	D1	R7140	N4	R7414	*P4	RB1001	H3	TP4242	C2
R4353	*C1	R4474	G5	R7141	N4	R7415	*P4	RB1006	C5	TP4243	C2
R4354	*C1	R4475	D1	R7142	N4	R7416	*P4	RB1007	*F3	TP4291	B1
R4360	*C1	R4476	*D2	R7143	N4	R7417	*P4	RB1200	K5	TP4292	B1
R4361	*C1	R4477	*D2	R7150	M4	R7418	*P4	RB1201	J5	TP4293	B1
R4362	*C1	R4478	*D2	R7151	M4	R7420	*P5	RB1202	K5	TP4370	C1
R4363	*C1	R4479	*D2	R7152	M4	R7421	*P5	RB1203	L5	TP4400	F5
R4364	*C1	R4480	*D2	R7153	M4	R7422	*P5	RB1204	K5	TP4401	F5
R4370	*C1	R4481	*D2	R7181	N3	R7423	*P5	RB1205	L5	TP4402	F5
R4371	*C1	R4482	*D2	R7182	M3	R7424	*P5	RB1217	K5	TP4403	D1
R4380	C2	R4483	*D2	R7183	M3	R7425	*P5	RB1218	L5	TP4407	D2
R4381	C2	R4484	G4	R7184	M3	R7426	*P5	RB1219	K5	TP4408	D2
R4382	C1	R4485	G4	R7185	M3	R7427	*P5	RB1220	K5	TP4409	D2
R4383	C1	R4486	G4	R7186	M3	R7428	*P5	RB2001	J3	TP4450	D1
R4384	C1	R4487	G4	R7187	M3	R8000	L4	RB2200	D1	TP7101	N5
R4385	C1	R4488	G4	R7188	M3	R8001	L4	RB2201	*J3	TP7102	M5
R4386	C1	R4489	G4	R7190	*M3	R8002	L4	RB2202	M1	TP7131	N4
R4387	C1	R4490	G4	R7191	*M3	R8003	L4	RB3000	*A4	TP7201	P5
R4388	*B2	R4491	G4	R7192	*M3	R8004	L4	RB3001	*A4	TP7202	N5
R4389	*B2	R4492	*F5	R7193	*M3	R8005	L4	RB3002	A5	TP7231	N4
R4390	C2	R4493	*F5	R7200	N5	R8006	L4	RB3003	B5	TP8001	L4
R4391	C2	R4494	*F5	R7201	P4	R8007	L4	RB3004	A5	TP9000	N1
R4392	C2	R4495	*F5	R7202	N4	R8008	L4	RB3005	B5	TP9021	M2
R4393	*C2	R4496	*F5	R7203	P5	R8009	L4	RB3009	B5	TP9070	K1
R4394	B1	R4497	*F5	R7204	N5	R8010	L3	RB3010	B5	TP9071	N1
R4395	B1	R4498	*F5	R7210	N3	R8011	L3	RB3011	A5	TP9072	N1
R4400	*F5	R4499	*F5	R7211	N3	R8012	L3	RB3012	B5	TP9080	P1
R4401	*F5	R4500	*G4	R7212	N3	R8013	L3			TP9081	P1
R4402	G5	R4501	*G4	R7213	N3	R8014	L3	RV4000	C4	TP9082	P1
R4403	*G5	R4502	*G4	R7214	P3	R8015	L3	RV4200	C1	TP9101	M2
R4404	F4	R4503	*H4	R7215	N3	R8016	L4			TP9102	M1
R4405	G5	R4504	*H4	R7216	P3	R8017	L4	RY7100	M5	TP9171	N1
R4406	*G5	R4505	*H4	R7217	N3	R8021	L4	RY7200	N5	TP9172	N1
R4407	*G5	R4506	*H4	R7218	P3	R9002	M2			TP9182	P1
R4408	*G5	R4507	*H4	R7219	N3	R9003	M1	S1200	F3		
R4409	*H5	R4508	F5	R7220	N3	R9006	P1	S2200	J3	X4200	*B1
R4410	*H5	R4509	F5	R7221	N3	R9007	P1	S2201	C1	X4201	*B1
R4411	*H5	R4510	F4	R7222	N3	R9008	P1	S2202	M1	X4202	*C1
R4412	*H5	R4511	*F5	R7223	N3	R9009	P1			X4203	*C1
R4413	*H5	R4512	G4	R7224	N3	R9010	P1	SORI01	A3	X4204	*C2
R4414	*G5	R4513	G5	R7225	N3	R9011	P1	SORI02	P3	X4205	*C2
R4415	*G5	R4514	G5	R7226	N3	R9012	P1			X4350	*C1
R4416	G5	R4515	*G5	R7227	N3	R9013	P1	TP200	H3	X4360	*C1
R4417	G5	R4516	*G5	R7228	N3	R9014	P2	TP300	P3	X9000	N2
R4418	G5	R4525	*H5	R7229	N3	R9015	P2	TP500	E3		
R4419	G5	R4551	F4	R7230	*N3	R9016	P2	TP502	E3	*:B SIDE	
R4420	G5	R4552	F4	R7231	*N3	R9017	P2	TP503	E3		
R4421	G5	R4553	D1	R7232	*N3	R9018	P2	TP505	E3		
R4422	G5	R4554	D1	R7233	*N3	R9019	M1	TP581	F3		
R4423	G5	R4555	*D1	R7235	*N4	R9020	M2	TP582	F3		
R4424	G5	R4556	C1	R7240	P4	R9021	N2	TP801	D3		
R4425	G5	R4557	C1	R7241	P4	R9022	P1	TP802	D3		
R4426	G5	R4558	D1	R7242	P4	R9023	P1	TP811	E3		
R4427	G4	R4560	G4	R7243	P4	R9024	P1	TP812	E3		
R4428	G5	R4561	G4	R7250	N4	R9026	P1	TP813	D3		
R4429	G5	R4562	G4	R7251	N4	R9027	P1	TP814	D3		
R4430	*G5	R4570	F5	R7252	N4	R9028	P1	TP1011	F2		
R4431	*G5	R4571	F5	R7253	N4	R9029	P1	TP1012	F2		
R4432	*G5	R4572	G5	R7281	P3	R9030	P1	TP1013	E2		
R4433	*G5	R4573	D1	R7282	N3	R9031	N1	TP1014	F2		
R4434	*G5	R4574	D1	R7283	N3	R9032	N1	TP1061	H3		
R4435	D1	R4575	C1	R7284	N3	R9033	N1	TP1062	H3		
R4436	D1	R7100	N5	R7285	N3	R9034	N1	TP1063	G3		
R4437	D1	R7101	N4	R7286	N3	R9050	P1	TP1064	G3		
R4438	D1	R7102	M4	R7287	N3	R9051	P2	TP2200	K3		
R4439	D1	R7103	N5	R7288	N3	R9053	N1	TP2201	K3		
R4440	D1	R7104	M5	R7290	*N3	R9106	P1	TP2202	K3		
R4441	D1	R7110	M3	R7291	*N3	R9107	P1	TP2203	K3		
R4442	D1	R7111	M3	R7292	*N3	R9108	P1	TP2402	J1		
R4443	D1	R7112	M3	R7293	*N3	R9109	P1	TP2403	J1		
R4444	D1	R7113	M3	R7310	*M4	R9110	P1	TP2404	J1		
R4445	D1	R7114	N3	R7311	*M4	R9111	P1	TP3001	C5		
R4446	D1	R7115	M3	R7312	*M4	R9112	P1	TP4000	E4		
R4447	D1	R7116	N3	R7313	*M4	R9113	P1	TP4001	E4		
R4448	D1	R7117	M3	R7314	*M4	R9114	P1	TP4002	E4		

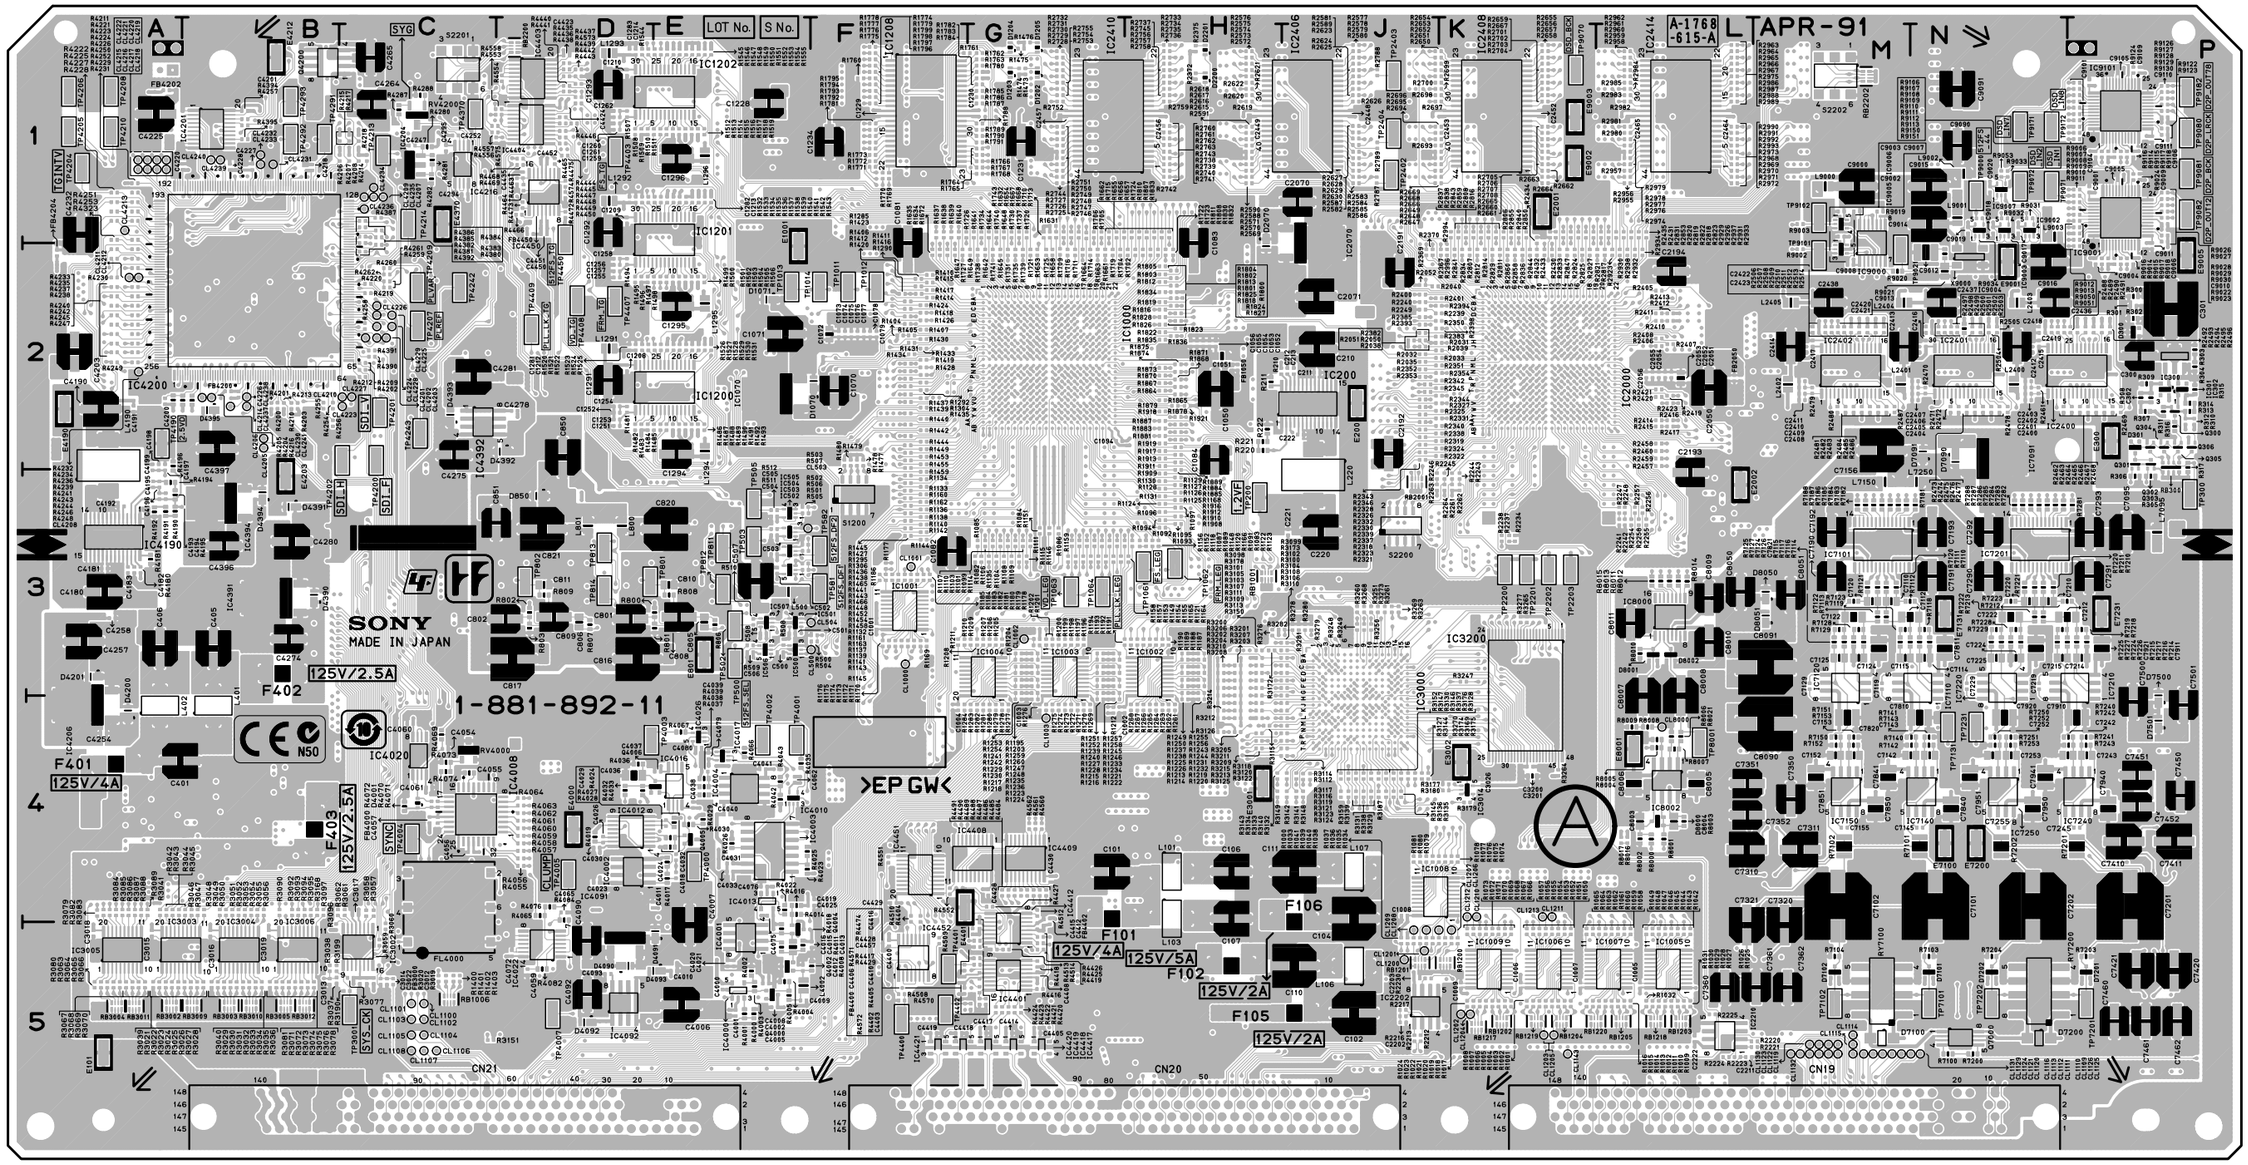

APR-91 -A SIDE-
SUFFIX: -11

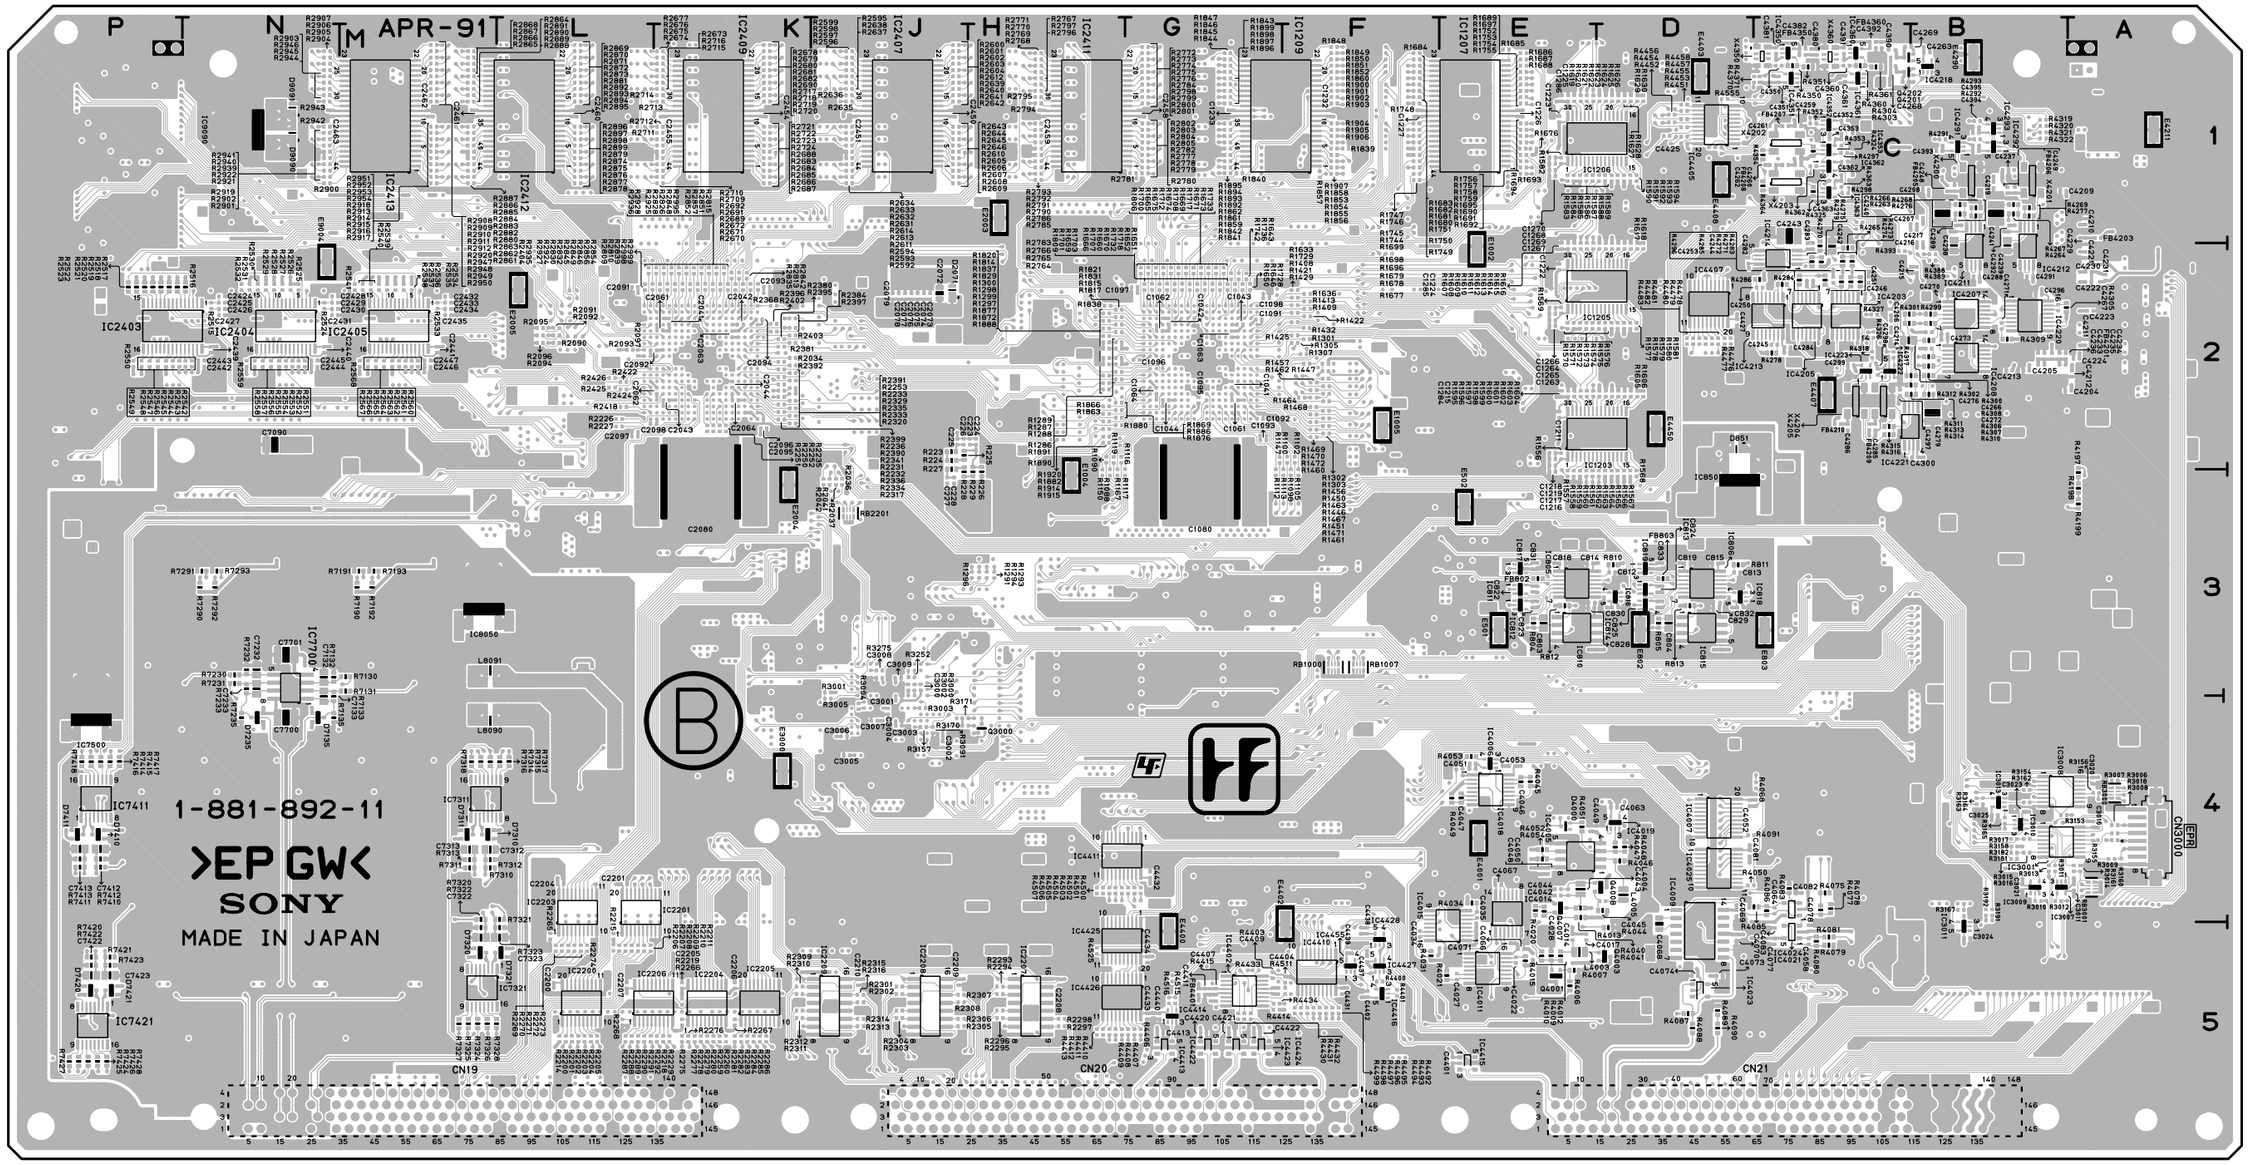

APR-91 -B SIDE-
SUFFIX: -11

CL-29 (1-648-572-31)

A4	A1
A5	C2
C1	A2
CN930	C1
CN931	C1
CN933	A2
CN935	A2
D1	B1
D2	B1
Q1	C1
Q2	B1
R1	A1
R2	A1

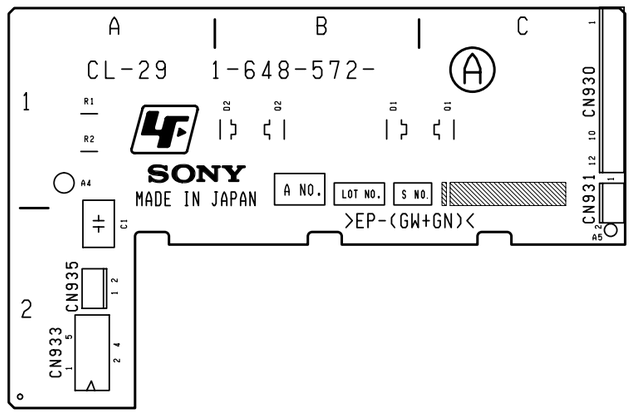

CL-29 -A SIDE-
SUFFIX: -31

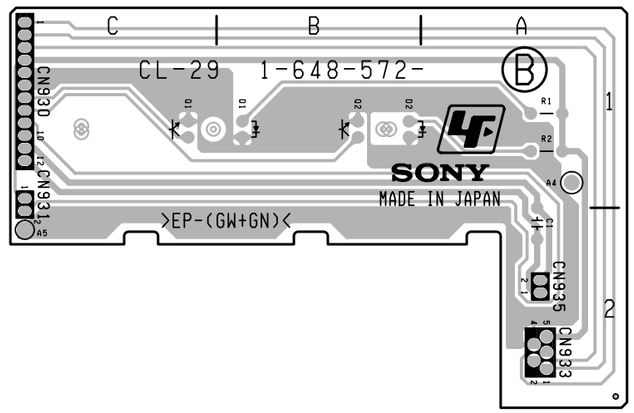

CL-29 -B SIDE-
SUFFIX: -31

CL-29 (1-648-572-32)

C1	A2
CN930	C1
CN931	C1
CN933	A2
CN935	A2
D1	B1
D2	B1
Q1	C1
Q2	B1
R1	A1
R2	A1
R3	A1
R4	A1
R5	A1
R6	A1

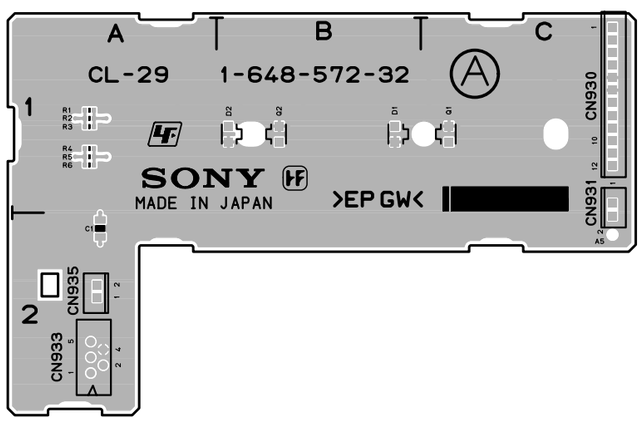

CL-29 -A SIDE-
SUFFIX: -32

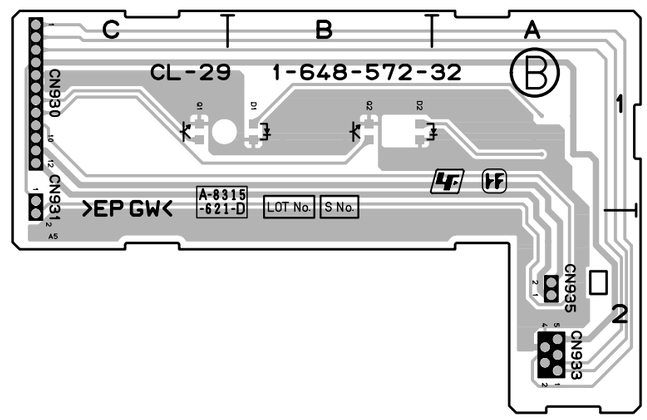

CL-29 -B SIDE-
SUFFIX: -32

CP-393 (1-874-866-11)

BZ1	A2	C318	F3	C703	D3	C964	*E2	D714	D3	FB836	*D3	Q503	C1	R320	*F3	R415	*H4	R782	D3	SL700	*H2
		C319	G3	C704	E3	C965	*F2	D900	F2	FB837	*D2	Q504	C1	R321	G2	R416	*H4	R783	D3	SL701	*G2
C3	*C3	C320	G3	C705	D3	C966	*E2					Q700	*A2	R322	G2	R417	*H3	R784	D3		
C4	*C3	C321	G3	C706	D3	C967	*E2	E200	D2	IC1	C2	Q701	D3	R323	G2	R418	*H3	R786	E2	TP100	B2
C5	*C3	C322	G3	C707	F3	C968	*E2	E201	*E2	IC4	B2	Q702	E3	R324	*H3	R419	*G4	R787	E3	TP101	B2
C6	*C3	C323	H3	C708	E2	C969	*E2	E300	G2	IC5	B2	Q703	E3	R325	G2	R420	*G3	R790	B2	TP102	B2
C7	*C3	C324	*G3	C709	D2	C970	*E2	E301	*H2	IC6	*C2	Q704	F3	R326	*H3	R421	*G3	R791	B2	TP103	B3
C8	*C3	C325	G2	C710	D3	C971	*E2	E302	G3	IC200	*B3	Q705	F3	R327	H4	R422	*G4	R792	B2	TP300	G2
C9	*C2	C326	G2	C711	D3	C972	*E2	E700	B2	IC201	*C3	Q706	E4	R328	*H3	R453	*G3	R793	B2	TP301	G2
C10	*C2	C327	*G4	C712	F4	C973	*E1	E701	*B3	IC203	B3	Q707	E4	R329	*H3	R454	*G3	R794	B2	TP302	G3
C11	*C2	C328	*G4	C713	C4			E900	F1	IC204	C3	Q709	D3	R330	*H4	R455	*G3	R799	D3	TP303	G3
C12	*C2	C329	*G4	C714	D3	CL3	C2			IC205	B4	Q900	F2	R331	*H3	R456	*G3	R801	*B2	TP304	G4
C13	*C2	C330	H3	C715	C3	CL16	B2	F700	E3	IC206	D2			R332	*H3	R457	*G3	R802	B1	TP704	C1
C14	*C2	C331	H4	C716	*F4	CL17	B2	F701	E3	IC207	C4	R1	B2	R333	G2	R458	*G3	R811	*B2	TP951	F1
C15	*C2	C332	*H3	C717	*G4	CL23	B2			IC301	G3	R2	B2	R334	G2	R500	*H3	R837	C1	TP952	F1
C16	*C2	C333	H3	C718	*A2	CL26	B2	FB1	C2	IC302	G2	R3	C2	R335	*H3	R522	D1	R940	*E1	TP953	F1
C17	*C2	C334	H2	C719	A2	CL27	B2	FB2	B3	IC303	*G3	R4	*B3	R336	*G4	R523	D1	R941	F2	TP954	F1
C18	C2	C335	*H3	C720	F3	CL30	B2	FB3	*C3	IC304	*G4	R5	*B3	R337	*G4	R524	D1	R951	*E1		
C19	C2	C336	H3	C721	G3	CL31	B1	FB300	H2	IC305	*G3	R6	*C2	R338	*G4	R525	D1	R952	*E1	X2	B2
C20	C2	C337	*H3	C722	A2	CL32	B1	FB301	H3	IC306	H4	R8	*C2	R339	*G4	R526	B1	R953	*E1	X3	B2
C21	C2	C338	*G3	C723	E3	CL300	G2	FB307	H2	IC307	*G4	R9	*C2	R340	*F3	R527	C1	R954	*E1	X300	G2
C22	*C2	C339	*G4	C724	E3	CL301	G2	FB308	H2	IC308	*H3	R10	*B2	R341	*G4	R528	C1	R955	*E2		
C23	*C2	C340	*H3	C725	E4	CL302	H4	FB309	G2	IC309	*H3	R11	*C2	R342	*F2	R530	C1	R960	F2	*:B SIDE	
C24	*C2	C341	H3	C726	F3	CL303	G2	FB310	G2	IC310	H3	R12	*C2	R343	G2	R532	E2	R961	F2		
C25	*C2	C342	*G3	C727	E3	CL304	G2	FB311	*H3	IC311	H3	R13	*C2	R344	G2	R705	E4	R962	E2		
C26	*B2	C343	H3	C729	G4	CL305	H4	FB312	*H3	IC314	*G3	R14	*C2	R345	G2	R706	*B2	R963	E2		
C27	*C3	C344	*G3	C730	*A2	CL306	H3	FB313	*H3	IC315	*G2	R15	*C2	R346	*G3	R707	*E2	R964	E2		
C28	*C3	C345	*G4	C731	*B2	CL307	H3	FB314	*H3	IC316	G2	R17	*C2	R347	*G3	R708	*E2	R965	E2		
C29	B2	C346	G3	C732	B2	CL308	H3	FB315	*H3	IC320	*G3	R18	*C2	R348	*G4	R709	*E2	R977	E2		
C30	B2	C347	G3	C733	A2	CL309	H3	FB316	*H3	IC503	D1	R19	C2	R349	*H3	R710	*E2	R978	*E2		
C31	C2	C348	G2	C734	*B3	CL504	E1	FB317	*H3	IC504	E1	R20	C2	R350	*G3	R711	E3	R982	*E1		
C32	B3	C349	H3	C735	*B2	CL505	E1	FB318	*H3	IC700	A2	R21	C2	R351	*G4	R712	*E2	R983	*E1		
C33	B2	C350	H3	C737	D3	CL506	E1	FB319	*H3	IC701	D3	R22	*C2	R352	*G3	R714	B1	R984	*E1		
C37	*C2	C351	H4	C738	*A2	CL507	E1	FB320	*H3	IC702	D3	R23	*C2	R353	*G3	R715	*A2	R985	*E1		
C38	*C2	C352	*H3	C739	D2	CL508	E1	FB321	*H3	IC706	F3	R24	*C2	R354	*G3	R716	E4	R986	F2		
C39	B2	C353	H3	C740	*B2	CL509	E1	FB322	*H3	IC708	*G4	R25	C2	R355	*G3	R717	E2	R987	F2		
C40	*C2	C354	H2	C741	*B3	CL510	E1	FB323	*H3	IC709	A2	R26	C2	R356	*G3	R718	E2	R997	*E2		
C41	*C2	C355	H4	C745	D4	CL511	E1	FB324	*H3	IC710	A2	R27	B2	R357	*F3	R719	E2				
C42	*C3	C356	H3	C748	E4	CL512	E1	FB325	*H3	IC711	*B2	R28	B2	R358	*G3	R720	E2	RB21	C2		
C43	*C2	C357	H4	C749	F3	CL563	D1	FB326	*H3	IC712	*B2	R29	*C2	R359	*H3	R721	F4	RB22	B3		
C44	B2	C358	H3	C750	*B3	CL564	D1	FB327	*H3	IC713	B2	R31	*C2	R360	*H3	R722	E4	RB23	C3		
C45	*C2	C359	*H4	C751	B3	CL565	D1	FB328	*H3	IC715	*B2	R32	*C2	R361	*H3	R723	E4	RB24	C2		
C46	B2	C360	H3	C754	E2	CL700	E3	FB718	*E2	IC716	*A2	R33	C2	R362	*H4	R724	E4	RB25	C3		
C200	*B3	C361	H3	C755	E2	CL716	F3	FB719	*E2	IC717	D2	R34	C2	R363	*H3	R725	E4	RB26	*B1		
C201	*C3	C362	H4	C756	E2	CL717	E4	FB720	*E2	IC720	*B3	R35	C2	R364	*H3	R727	E2	RB27	*B1		
C203	B3	C363	*H4	C757	E2	CL723	B2	FB721	*E2	IC721	B2	R36	*B2	R365	*H3	R728	E2	RB33	B2		
C204	C3	C364	*H3	C758	E2	CL731	G4	FB722	*E2	IC722	B3	R37	*C2	R366	*H3	R729	E2	RB34	C2		
C205	B4	C365	*H3	C759	E2	CL733	E4	FB723	E2	IC723	*E2	R38	*C2	R367	H4	R730	E2	RB35	*B1		
C206	D2	C366	G2	C760	E2	CL734	F4	FB724	E2	IC724	E4	R39	C2	R368	*H3	R731	D3	RB36	*B1		
C207	C4	C367	G2	C761	E2	CL735	D3	FB725	E2	IC800	*B2	R40	*B2	R369	*H3	R732	D3	RB37	*C2		
C208	*B3	C368	H2	C762	E2	CL736	D4	FB726	E2	IC801	*B1	R41	*C2	R370	*H3	R733	D3	RB38	*B2		
C209	*C3	C369	G2	C763	E2	CL737	E4	FB727	*E2	IC900	E2	R90	*C2	R371	*G3	R734	D3	RB39	B3		
C210	*B3	C371	*G3	C765	E4	CL738	E2	FB728	*E2	IC951	*E1	R95	*C2	R372	*G3	R735	D3	RB301	F2		
C211	*B3	C372	*G3	C766	E4	CL954	E2	FB729	E2	IC953	*E1	R100	B3	R373	*G4	R736	E4	RB302	*H3		
C212	*B4	C373	*G3	C767	E3	CL957	E2	FB730	E2			R113	C2	R374	*H3	R737	E4	RB303	*H3		
C213	*B4	C374	*G3	C768	E4	CL962	E2	FB731	E2	JC1	C3	R115	*C2	R375	*H3	R738	E4	RB304	*H3		
C214	*C3	C375	*G3	C769	E4	CL964	E1	FB800	*C1	JC2	C3	R117	*C2	R376	*H4	R739	E4	RB315	G3		
C215	*C3	C376	*G3	C770	F4	CL981	F2	FB801	*C1	JC3	C3	R130	*C2	R377	H3	R740	*A2	RB316	G3		
C216	*C3	C377	*G3	C771	E3	CL982	F2	FB802	*C1	JC4	C3	R132	B1	R378	*H3	R741	*B2	RB317	G3		
C217	*C3	C378	*G3	C772	E4	CL983	F2	FB803	*C1	JC5	C3	R133	B1	R379	H3	R745	*B3	RB318	G3		
C218	*C4	C379	*G3	C773	E4	CL984	F2	FB804	*C1	JC6	C3	R135	B1	R380	*H3	R746	A2	RB319	G3		
C219	*C4	C380	*F3	C774	E4	CL985	F2	FB805	*C1	JC7	C3	R143	B2	R381	G2	R747	*A2	RB320	G3		
C220	B4	C381	*F3	C775	F4	CL986	F2	FB806	*C1	JC8	C3	R144	B2	R382	*H4	R748	E4	RB321	F3		
C221	C3	C382	G3	C776	F3	CL987	F2	FB807	*C1	JC9	C3	R145	B2	R383	*H4	R749	*E2	RB323	F3		
C222	B4	C383	G3	C777	F4	CL988	F2	FB808	*C1	JC10	C3	R146	B3	R384	*H3	R754	*E2	RB324	*F3		
C223	B4	C384	*G3	C778	F4	CL990	F2	FB809	*C1	JC11	C3	R148	A2	R385	*H3	R755	*E2	RB325	F3		
C224	B3	C385	*G3	C779	F3			FB810	*C1	JC12	C2	R200	*B4	R386	*H4	R756	*E2	RB326	*F3		
C225	B3	C386	G3	C780	F4	CN1	C1	FB811	*C1	JC13	C2	R201	C4	R387	*H3	R757	*E2	RB327	F3		
C226	C4	C387	G3	C781	F4	CN3	B1	FB812	*C1	JC14	C2	R202	*C3	R388	*G4	R758	*E2	RB328	F3		
C227	C3	C388	H3	C782	F4	CN300	*F3	FB813	*C1	JC15	C2	R203	C3	R389	G2	R759	*E2	RB329	F3		
C228	C4	C389	H2	C783	F4	CN301	H3	FB814	*C1	JC16	C2	R204	B4	R390	G2	R760	*E2	RB330	*H3		
C229	C4	C390	H3	C784	E2	CN502	*D3	FB815	*C1	JC17	C2	R205	C3	R392	*G4	R761	E2	RB331	*H3		
C230	C3	C391	H3	C785	E2	CN503	*C1	FB816	C1	JC18	C2	R206	*B4	R393	*H3	R762	E4	RB332	*H3		
C231	C3	C403	F2	C786	E2	CN700	B2	FB817	C1	JC19	*C2	R207	*C4	R394	*H3	R763	E4	RB701	*A2		
C300	*G2	C406	*H3	C787	E2	CN701	*E2	FB818	C1			R208	B3	R395	*H3	R764	E4	RB702	B2		
C301	G2	C407	*H3	C788	F3	CN800	*C1	FB819	*D3	L100	*C3	R209	C3	R396	H3	R765	D3	RB703	B2		
C302	G2	C408	H3	C789	F3	CN951	E1	FB820	*D3	L101	*C2	R301	H3	R397	H3	R766	D3	RB704	B3		
C303	*G2	C410	H3	C800	*B2			FB821	*D3	L300	G2	R305	H3	R398	H4	R767	D3	RB705	*A2		
C304	G3	C413	*G3	C801	*B1	D500	B1	FB822	*D3	L301	G2	R306	*G3	R401	*H3	R768	D3	RB706	B3		
C305	F2	C414	*G4	C802	*B1	D501	C1	FB823	*D3	L302	F2	R307	*F2	R402	*H4	R769	D3	RB901	E1		
C306	F2	C415	F3	C951	*E1	D502	C1	FB824	*D3	L700	G4	R308	*G3	R403	*H3	R770	D3				
C307	*G2	C416	*G3	C953	*F2	D503	C1	FB825	*D2	L701	D2	R309	*G3	R404	H3	R771	F4	S1	B1		
C308	F2	C417	*G3	C954	*E2	D704	*G4	FB826	*D2	L702	D4	R310	*H3	R405	*H3	R772	F4	S2	B1		
C309	F2	C418	H3	C955	*E2	D705	D3	FB827	*D2	L705	G3	R311	F2	R406	*H3	R773	F4	S300	F2		
C310	F3	C419	H3	C956	*E2	D706	E3	FB828	*D3	L707	E4	R312	*F3	R407	*H3	R774	F4	S700	B1		
C311	*G3	C506	*D1	C957	*F2	D707	E3	FB829	*D2	L708	E2	R313	F2	R408	*G3	R775	F4				
C312	F3	C507	E1	C958	*F2	D708	F3	FB830	*D3	L709	E3	R314	*H3	R409	*G3	R776	F4	SL300	*G3		
C313	G4	C508	*D1	C959	*F2	D709	F3	FB831	*D2	L710	F3	R315	F2	R410	H3	R777	F4	SL301	*G3		
C314	F3	C509	E2	C960	*E2	D710	E4	FB832	*D3			R316	G2	R411	*G3	R778	F4	SL302	*H4		
C315	*H3	C700	D4	C961	*E2	D711	D3	FB833	*D2	Q1	A2	R317	G2	R412	H3	R779	D3	SL303	*H2		
C316	*H4	C701	A2	C962	*F2	D712	D3	FB834	*D3	Q501	B1	R318	F2	R413	*G3	R780	D3	SL304	*G2		
C317	G3	C702	E3	C963	*F2	D713	D3	FB835	*D2	Q502	C1	R319	*F3	R414	*H3	R781	D3	SL305	*G3		

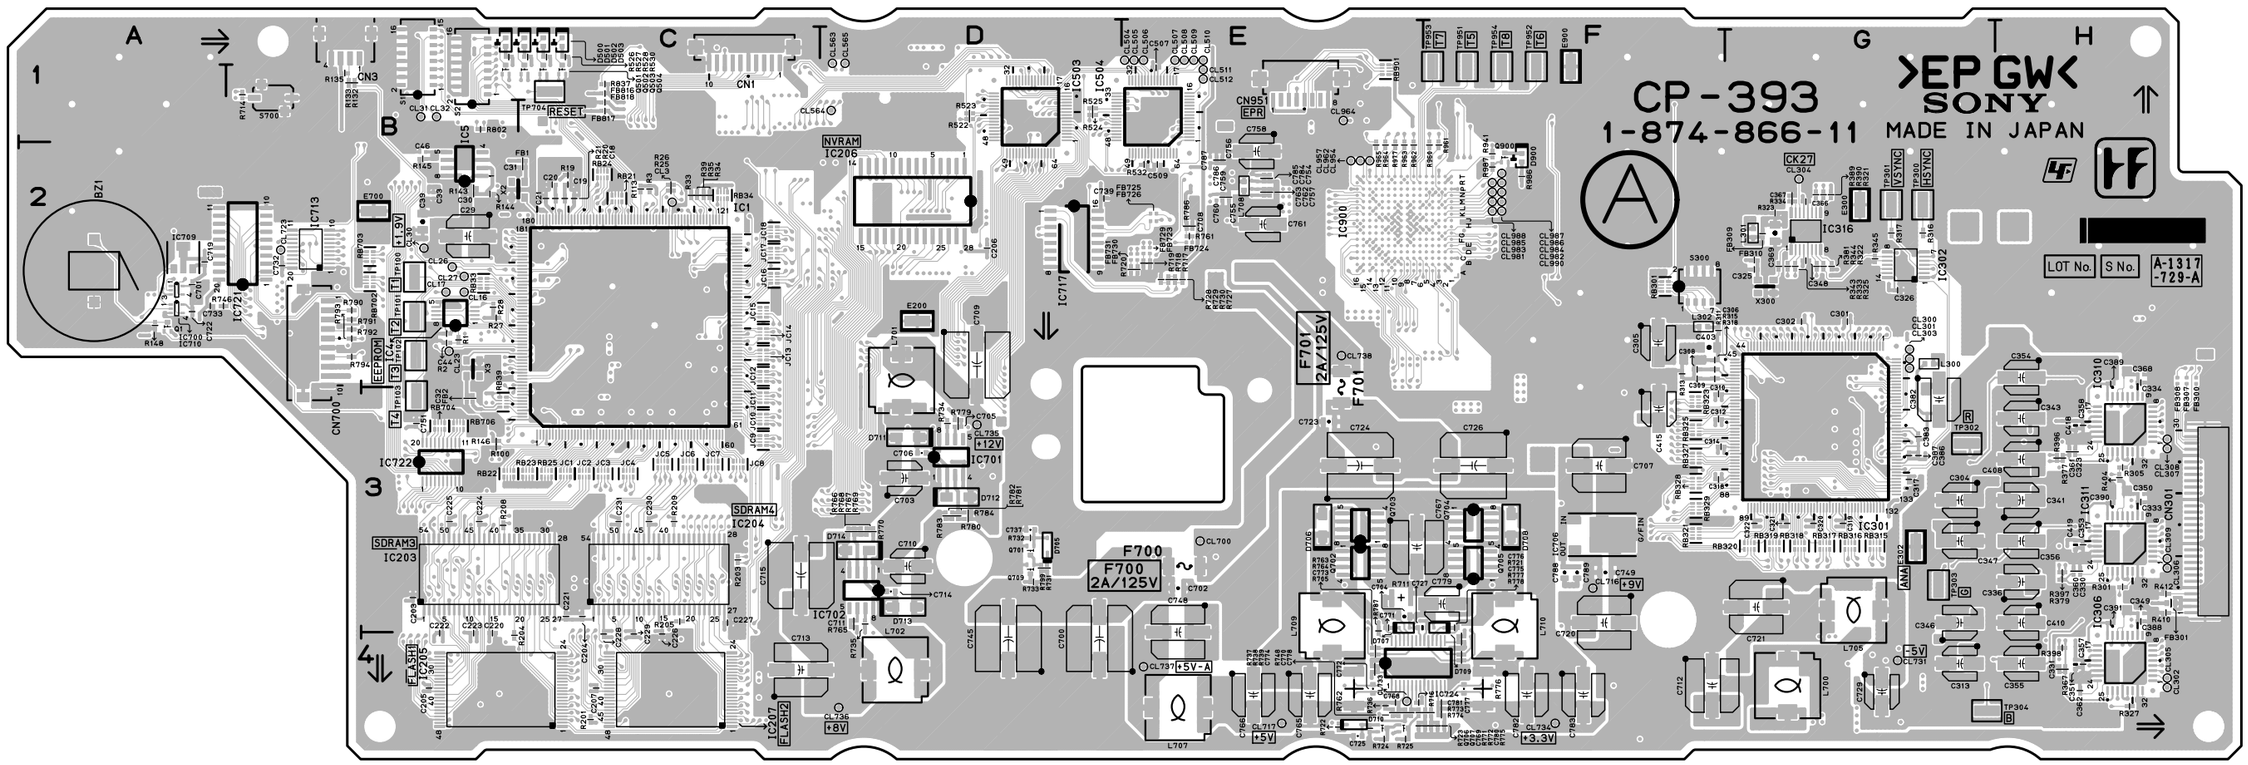

CP-393 -A SIDE-
SUFFIX: -11

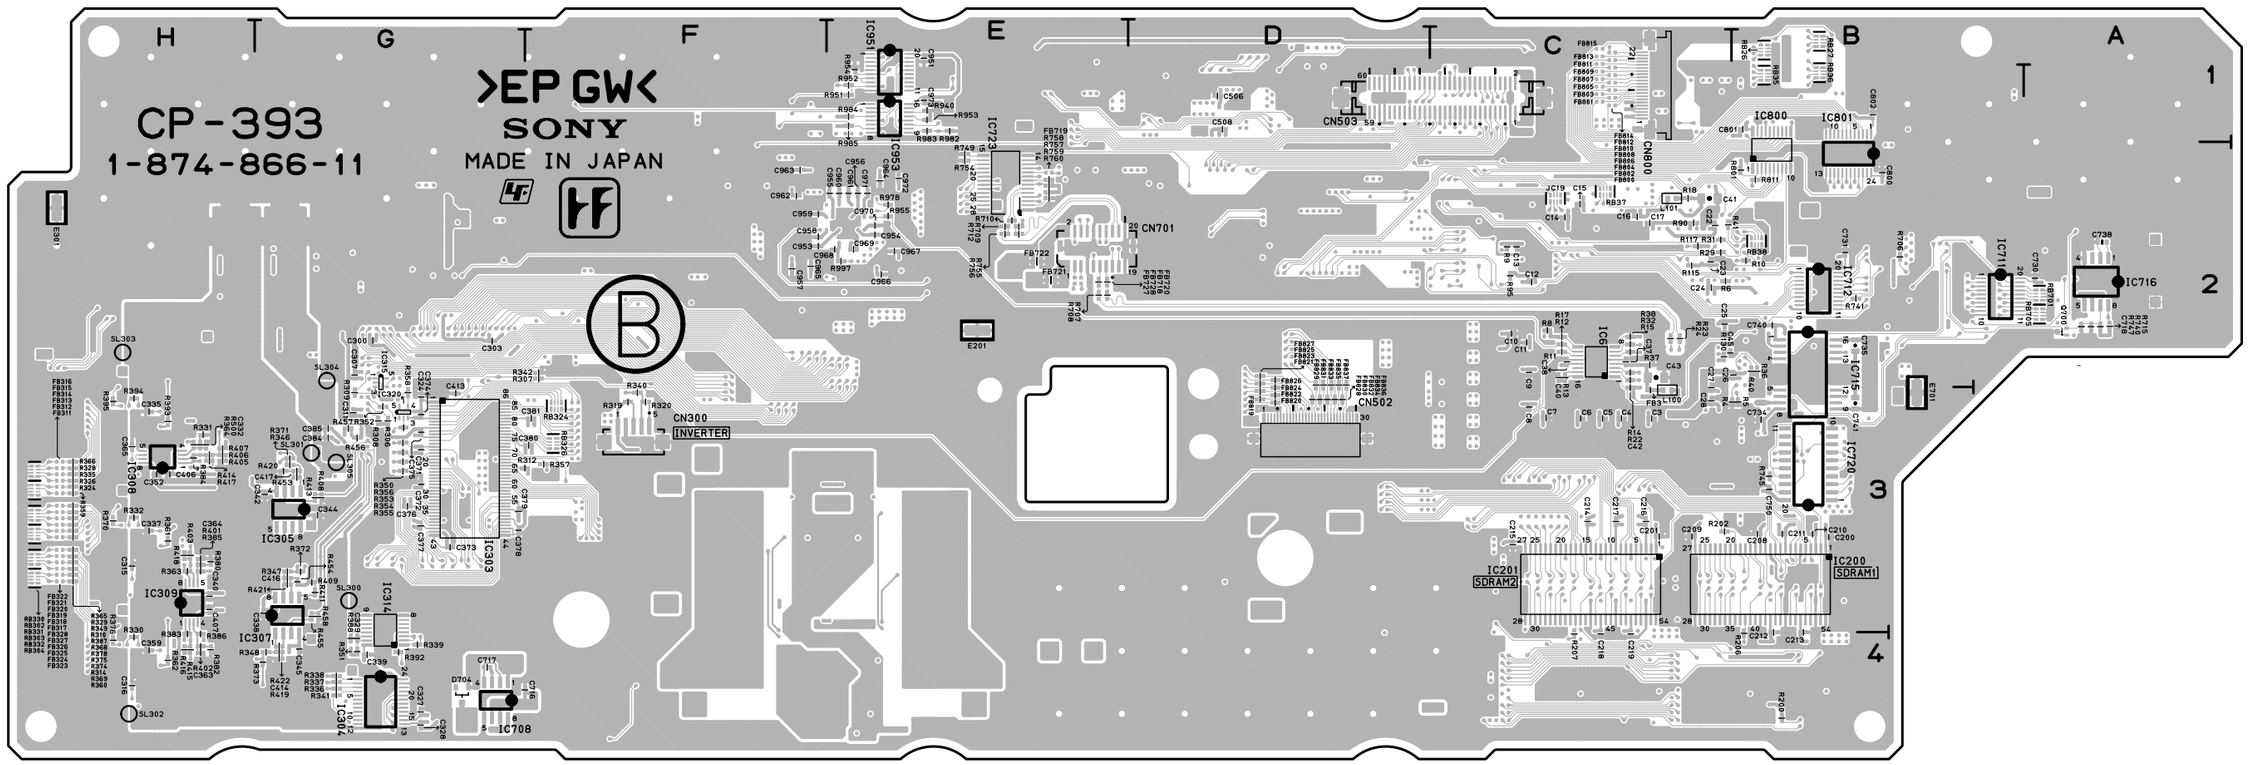

CP-393 -B SIDE-
SUFFIX: -11

CP-397 (1-874-874-11)

C502	A3
C503	A3
C601	A1
C602	B1
C603	A1
C604	B1
C700	A2
C701	A2
C702	B2
C704	B2
CN1	B3
CN501	A3
CN600	A1
CN700	A2
CN701	B2
FB504	A3
FB505	A3
FB607	A1
FB608	B1
FB609	A1
FB610	B1
FB700	A2
FB709	B2
FB710	B2
FB711	A2
FB712	A2
FB713	A2
FB714	A2
FB715	B2
FB716	B2
FB717	B2
R504	A3
R1602	A1
R1703	A2
R1704	A2
R1707	B2
R2600	A1

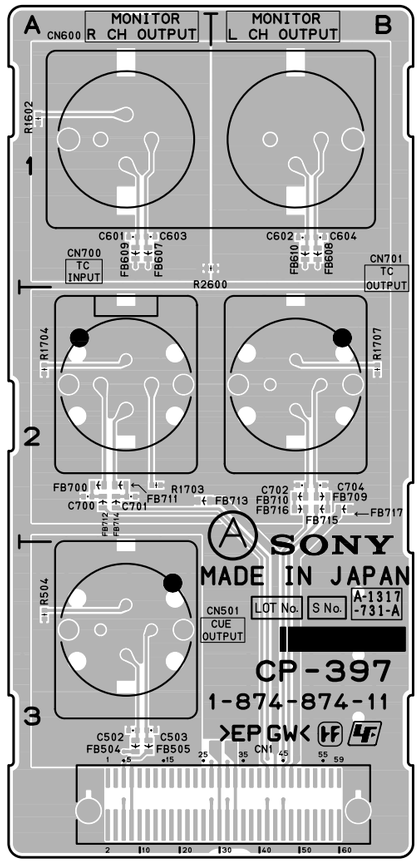

CP-397 -A SIDE-
SUFFIX: -11

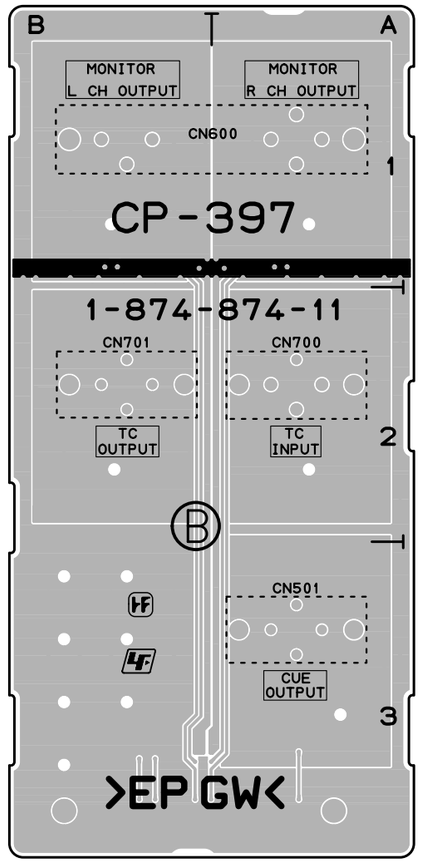

CP-397 -B SIDE-
SUFFIX: -11

CP-398 (1-874-875-11)

C1	C3
C2	D3
C4	C3
C5	C3
C6	D3
C7	D3
C8	C5
C9	C4
C10	C5
C11	B4
C12	B5
C13	B4
C14	B5
C15	C4
C16	B5
C17	B4
C18	D5
C19	C5
C20	D5
C21	C3
C22	C4
C23	D3
C24	D4
C25	D4
C26	D4
CN1	*B4
CN2	C2
CN3	D2
CN5	C3
CN6	D3
CN41	*C5
CN100	D5
D1	B5
FL1	C4
FL2	D3
FL3	D4
FL4	C3
IC1	B5
IC2	B4
IC3	C3
IC4	D4
IC5	D4
L3	B5
L4	B4
Q1	C3
Q2	D3
Q4	C3
Q5	D3
R1	C1
R2	D1
R4	C3
R5	D3
R7	C3
R8	D3
R10	C3
R11	D3
R13	C3
R14	D3
R16	C3
R17	D3
R19	D3
R21	C3
R22	D5
R23	D5
R24	D5
R25	C5
R26	C3
R27	C5
R28	D4
R29	D4
R30	C3
R31	C3
R32	D3
R33	D4
S1	C1
S2	D1
T100	C5

*:B SIDE

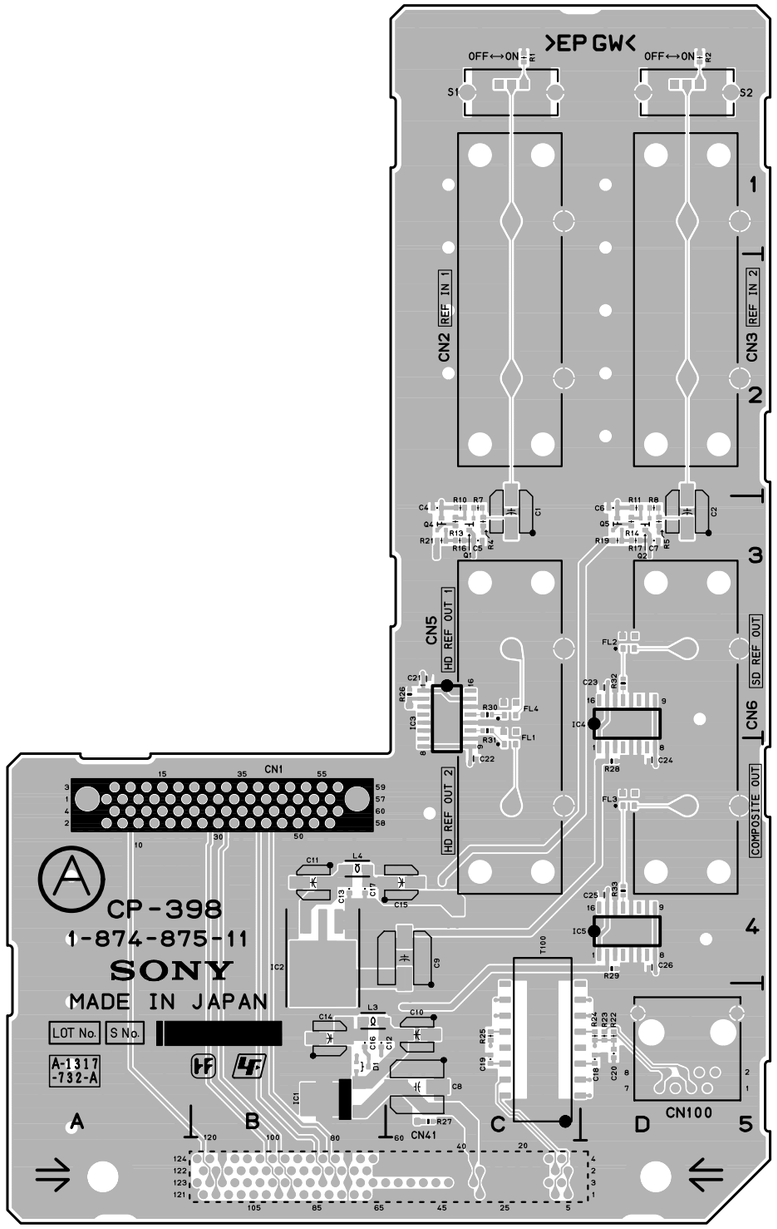

CP-398 -A SIDE-
SUFFIX: -11

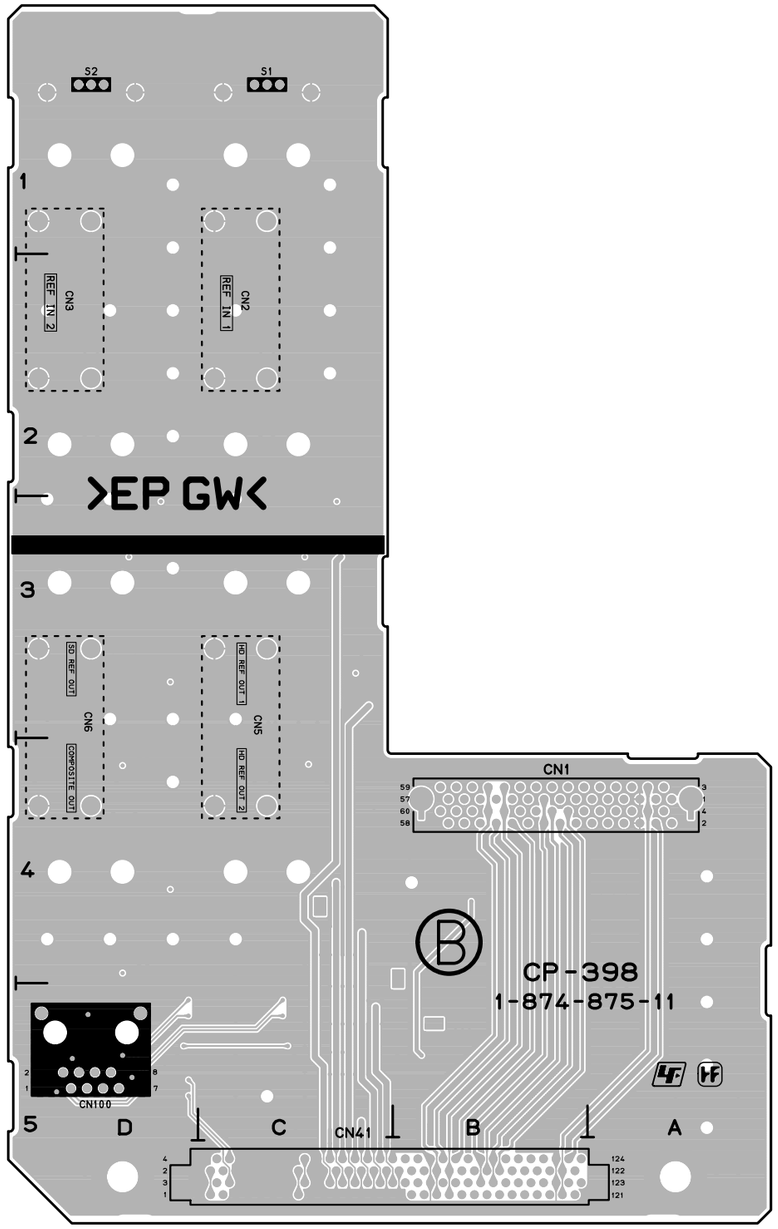

CP-398 -B SIDE-
SUFFIX: -11

CP-399 (1-874-876-11)

C100	C6	C317	B5	IC204	A6	R201	B1
C101	C6	C318	C5	IC205	A3	R202	A2
C102	C6	C319	B5	IC301	B6	R203	B2
C103	C6	C320	C5	IC302	B6	R204	A1
C104	C6	C321	B5	IC303	B6	R205	B1
C105	C6	C322	C5	IC304	C6	R206	A2
C106	C5	C323	B5	IC313	C5	R207	B2
C107	C5	C324	C5	IC320	B5	R208	A1
C108	C5	C325	B5	IC321	B4	R209	B1
C109	C5	C326	C5	IC322	A5	R210	A2
C110	C5	C327	B5	IC323	A5	R211	B2
C111	C5	C328	B5	IC324	B4	R212	A1
C112	C5	C329	C5	IC325	A5	R213	B1
C113	C2	C330	C5	IC326	C5	R214	A2
C114	C3	C331	C5	IC327	B5	R215	B2
C115	B1	C332	B5	IC328	C5	R216	A1
C116	B2	C333	B5			R217	B1
C117	C2			L200	A1	R218	A2
C118	B3	CL100	C6	L201	B1	R219	B2
C119	C2	CL101	C6	L202	A2	R220	A1
C120	C3	CL102	C6	L203	B2	R221	B1
C121	B2	CL103	C6	L204	A1	R222	A2
C122	B2	CL104	C6	L205	B1	R223	B2
C123	C2	CL105	C6	L206	A2	R224	A1
C124	B3	CL106	C1	L207	B2	R225	A1
C125	B2	CL107	C3	L208	A3	R226	A2
C126	B1	CL108	B1	L209	B3	R227	A2
C127	B3	CL109	B2	L210	A3	R228	B1
C128	B3	CL110	C2	L211	B3	R229	A2
C129	B2	CL111	B3	L212	A5	R230	B2
C130	B2	CL200	A1	L213	A3	R231	A2
C131	C2	CL201	B1			R232	A2
C132	C3	CL202	A2	PS200	A6	R233	A2
C133	B2	CL203	B2	PS300	C6	R234	A2
C134	B2	CL204	A1			R235	A2
C135	C2	CL205	A1	Q1	B3	R236	A3
C136	B3	CL206	A2			R237	B3
C137	B1	CL207	A2	R100	C6	R238	A3
C138	C1	CL208	A1	R101	C6	R239	B3
C139	B2	CL209	A1	R102	C6	R240	A3
C140	C2	CL210	A2	R103	C6	R241	B3
C141	B3	CL211	A2	R104	C6	R242	A3
C142	C3	CL212	A3	R105	C6	R243	B3
C143	C3	CL213	B3	R106	C6	R244	A3
C144	C2	CL214	A3	R107	C6	R245	B3
C200	A1	CL215	A3	R108	C6	R246	A3
C201	B1	CL216	A3	R109	C6	R247	B3
C202	A2	CL217	A3	R110	C6	R248	A3
C203	B2	CL300	B5	R111	C6	R249	A3
C204	A1			R112	C5	R252	A3
C205	B1	CN1	A1	R113	C5	R253	A3
C206	A2	CN10	B4	R114	C5	R254	B3
C207	B2	CN11	A4	R115	C5	R255	A3
C208	A2	CN12	C4	R116	C5	R256	A3
C209	A2	CN16	C5	R117	C5	R300	B6
C210	A2	CN42	*B6	R118	C2	R301	C6
C211	A2			R119	C3	R302	C6
C212	A3	D1	C3	R120	B1	R303	B6
C213	B3	D2	C3	R121	B2	R304	B6
C214	A3	D200	A1	R122	C2	R305	B6
C215	B3	D201	A2	R123	B3	R306	C5
C216	A5	D202	A1	R124	C2	R307	B5
C217	B3	D203	A2	R125	C3	R308	B5
C218	B3	D204	A3	R126	B2	R309	B5
C219	A5	D205	A3	R127	B2	R310	C5
C220	A3	D206	A5	R128	C2	R311	B5
C221	B5			R129	B3	R312	C4
C222	A3	FL301	A4	R130	C2	R313	C5
C223	B6	FL302	B4	R131	C3	R314	B5
C224	A5	FL305	C5	R132	B2	R315	C4
C225	A6	FL306	C5	R133	B2	R316	C5
C226	A6	FL307	A4	R134	C2	R317	B5
C227	B6	FL308	A4	R135	B3	R318	C5
C228	A6	FL309	C4	R136	B2	R319	B5
C229	B6	FL310	C4	R137	B1	R320	C5
C230	A3	FL313	A4	R138	C2	R321	B5
C231	B3	FL314	C5	R139	C1	R322	C6
C301	C6	FL315	B4	R140	B2	R323	C6
C302	C6	FL316	C4	R141	B2		
C303	C6	FL317	C4	R142	C2	RB300	B6
C304	B6	FL320	C5	R143	C2	RB301	C4
C305	B6			R144	B3	RB302	C4
C307	B5	IC100	C5	R145	B3	RB310	B5
C308	C6	IC101	B2	R146	C3	RB311	B5
C309	B6	IC102	B2	R147	C3	RB312	B4
C310	C5	IC103	B3	R148	C2	RB313	B4
C311	B5	IC104	C3	R149	B6	RB314	B4
C312	B5	IC105	C2	R150	B6	RB315	B4
C313	B5	IC200	A1	R151	C3	RB316	A4
C314	B5	IC201	A2	R152	C3	RB317	A4
C315	B5	IC202	A3	R153	B3	RB318	B4
C316	C5	IC203	A6	R200	A1	RB319	B4

RB320	A4		
RB321	A4		
RB322	C4		
RB323	B4		
RY1	C2		
RY2	C3		
TP200	A3		
TP201	C3		
X300	B5		
*:B SIDE			

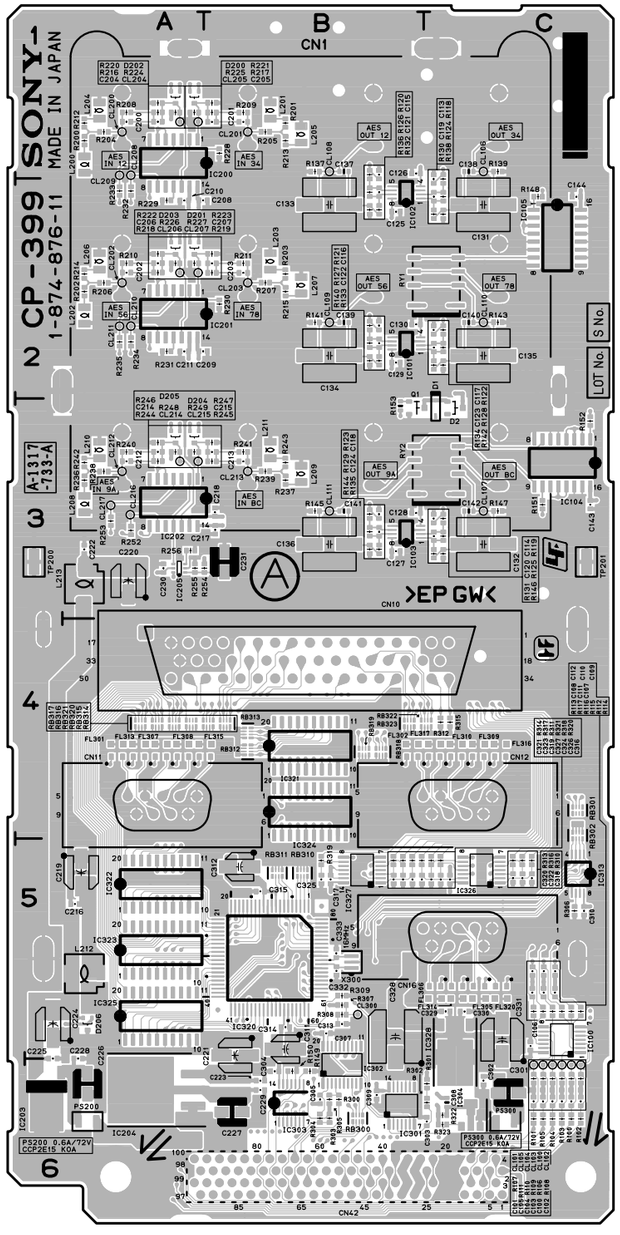

CP-399 -A SIDE-
SUFFIX: -11

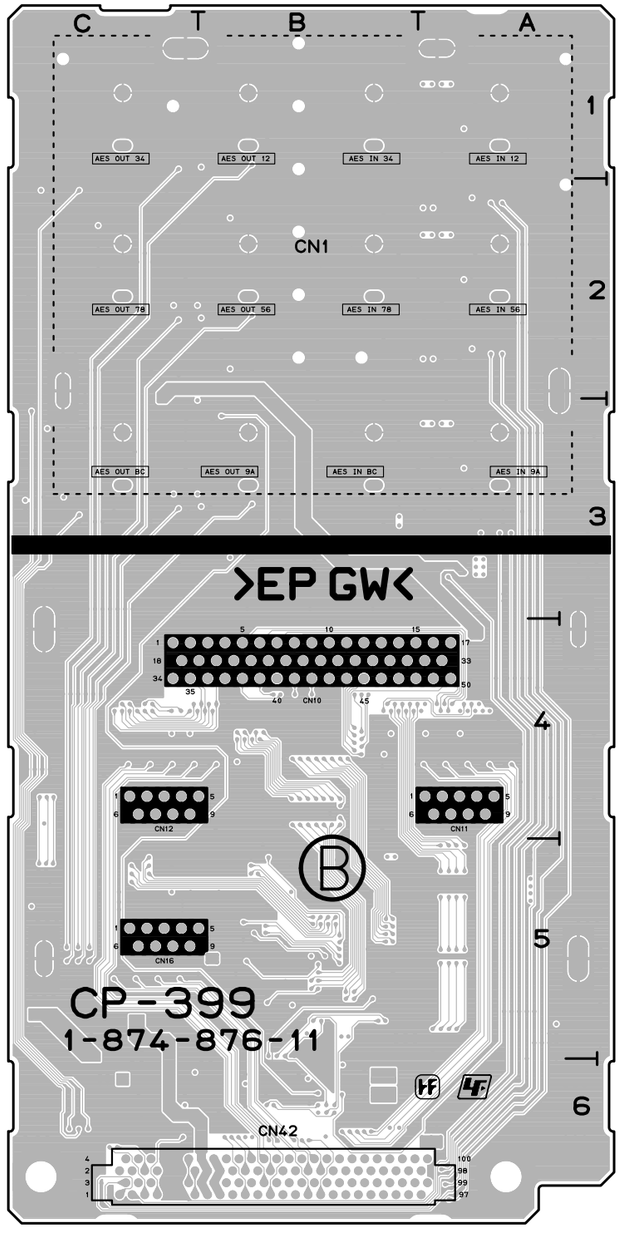

CP-399 -B SIDE-
SUFFIX: -11

CP-405 (1-881-978-11)

BZ1	A2	C317	G3	C507	E1	C955	*E2	D710	*F4	IC4	B2	R1	B2	R332	*H3	R463	*H3	R794	B2	RB320	G3
		C318	F3	C508	*D1	C956	*E2	D711	D4	IC5	B2	R2	B2	R333	G2	R464	H3	R800	*D3	RB321	F3
C3	*C3	C319	G3	C509	E2	C957	*F2	D712	D3	IC6	*C2	R3	C2	R334	G2	R465	H3	R801	*D3	RB323	F3
C4	*C3	C320	G3	C700	D4	C958	*F2	D713	D4	IC200	*B3	R4	*B3	R335	H3	R466	H3	R802	*D3	RB324	*F3
C5	*C3	C321	G3	C701	A2	C959	*F2	D714	E3	IC201	*C3	R5	*B3	R336	*G4	R467	H3	R803	*D3	RB325	F3
C6	*C3	C322	G3	C702	E3	C960	*E2	D715	D3	IC203	B3	R6	*C2	R337	*G4	R468	H4	R804	*D3	RB326	*F3
C7	*C3	C323	H3	C704	F3	C961	*E2	D716	E3	IC204	C3	R8	*C2	R338	*G4	R469	H4	R805	*D3	RB327	F3
C8	*C3	C324	*G3	C705	*D3	C962	*F2	D717	F3	IC205	B4	R9	*C2	R339	*G4	R470	*H3	R806	*D3	RB328	F3
C9	*C2	C325	G2	C706	*D4	C963	*F2	D718	E3	IC206	D2	R10	*B2	R342	*F2	R471	*H3	R807	*D3	RB329	F3
C10	*C2	C326	G2	C707	F3	C964	*E2	D900	F2	IC207	C4	R11	*C2	R343	G2	R472	*H3	R808	E3	RB701	*A2
C11	*C2	C327	*G4	C708	E2	C965	*F2	D901	D3	IC208	*D1	R12	*C2	R344	G2	R473	H3	R809	E3	RB702	B2
C12	*C2	C328	*G4	C709	C3	C966	*E2			IC301	G3	R13	*C2	R346	*G3	R474	H3	R811	*B2	RB703	B2
C13	*C2	C329	*G4	C711	*D3	C967	*E2	E200	D2	IC302	G2	R14	*C2	R347	*G3	R475	H3	R837	C1	RB704	B3
C14	*C2	C330	H3	C712	F4	C968	*E2	E201	*E2	IC303	*G3	R15	*C2	R348	*G4	R480	*H3	R838	D2	RB705	*A2
C15	*C2	C331	H4	C713	D3	C969	*E2	E300	G2	IC304	*G4	R17	*C2	R349	H3	R481	*H3	R839	*D2	RB706	B3
C16	*C2	C332	*H3	C714	*D3	C970	*E2	E301	*H2	IC305	*G3	R18	*C2	R350	*G3	R500	*H3	R940	*E1	RB901	E1
C17	*C2	C333	H3	C715	D3	C971	*E2	E302	G3	IC306	H4	R19	C2	R351	*G4	R522	D1	R941	F2		
C18	C2	C334	H2	C716	*F4	C972	*E2	E700	B2	IC307	*G4	R20	C2	R352	*G3	R523	D1	R951	*E1	S1	B1
C19	C2	C335	*H3	C717	*G4	C973	*E1	E701	*B3	IC308	*H3	R21	C2	R353	*G3	R524	D1	R952	*E1	S2	B1
C20	C2	C336	*H3	C718	*A2	C974	D3	E900	F1	IC309	*H3	R22	*C2	R354	*G3	R525	D1	R953	*E1	S700	B1
C21	C2	C337	*H3	C719	A2	C975	D3			IC310	H3	R23	*C2	R355	*G3	R526	*B1	R954	*E1		
C22	*C2	C338	*G3	C720	F3	C976	D3	F700	E3	IC311	H3	R24	*C2	R356	*G3	R527	*B1	R955	*E2	SL300	*G3
C23	*C2	C339	*G4	C721	G3	C977	D3	F701	E3	IC314	*G3	R25	C2	R357	*F3	R528	*B1	R960	F2	SL301	*G3
C24	*C2	C340	*H3	C722	A2					IC315	*G2	R26	C2	R358	*G3	R530	*B1	R961	F2	SL302	*H4
C25	*C2	C341	*H3	C723	E3	CL3	C2	FB1	C2	IC316	G2	R27	B2	R359	H3	R532	E2	R962	E2	SL303	*H2
C26	*B2	C342	*G3	C724	F3	CL16	B2	FB2	B3	IC320	*G3	R28	B2	R360	H4	R533	*B2	R963	E2	SL304	*G2
C27	*C3	C343	H3	C725	*F4	CL17	B2	FB3	*C3	IC321	*H3	R29	*C2	R361	*H3	R534	B2	R964	E2	SL305	*G3
C28	*C3	C344	*G3	C726	E3	CL23	B2	FB4	*C2	IC503	D1	R31	*C2	R362	*H4	R706	*B2	R965	E2	SL700	*H2
C29	B2	C345	*G4	C727	E3	CL26	B2	FB301	H3	IC504	E1	R32	*C2	R363	*H3	R707	*E2	R977	E2	SL701	*G2
C30	B2	C346	*G3	C729	G4	CL27	B2	FB309	G2	IC700	A2	R33	C2	R364	*H3	R708	*E2	R978	*E2		
C31	C2	C347	*G3	C730	*A2	CL30	B2	FB310	G2	IC701	D3	R34	C2	R365	H3	R709	*E2	R982	*E1	TP100	B2
C32	B3	C348	G2	C731	*B2	CL32	B1	FB329	G2	IC702	E3	R35	C2	R366	H3	R710	*E2	R983	*E1	TP101	B2
C33	B2	C349	H3	C732	B2	CL300	G2	FB330	F2	IC706	F3	R36	*B2	R367	H4	R712	*E2	R984	*E1	TP102	B2
C37	*C2	C350	H3	C733	A2	CL301	G2	FB331	*H3	IC708	*G4	R37	*C2	R368	H3	R714	B1	R985	*E1	TP103	B3
C38	*C2	C351	H4	C734	*B3	CL303	G2	FB332	H3	IC709	A2	R38	*C2	R369	H4	R715	*A2	R986	F2	TP300	G2
C39	B2	C352	*H3	C735	*B2	CL304	G2	FB333	H3	IC710	A2	R39	C2	R370	*H3	R716	*E4	R987	F2	TP301	G2
C40	*C2	C353	H3	C738	*A2	CL504	E1	FB718	*E2	IC711	*B2	R40	*B2	R371	*G3	R717	E2	R997	*E2	TP302	G3
C41	*C2	C354	H2	C739	D2	CL505	E1	FB719	*E2	IC712	*B2	R41	*C2	R372	*G3	R718	E2	R998	D3	TP303	G3
C42	*C3	C355	G4	C740	*B2	CL506	E1	FB720	*E2	IC713	B2	R90	*C2	R373	*G4	R719	E2	R999	D3	TP304	G4
C43	*C2	C356	G3	C741	*B3	CL507	E1	FB721	*E2	IC715	*B2	R100	B3	R374	H4	R720	E2	R1000	*D3	TP704	B1
C44	B2	C357	H4	C745	E4	CL508	E1	FB722	*E2	IC716	*A2	R113	C2	R375	H4	R722	*F4	R1001	D3	TP951	E1
C45	*C2	C358	H3	C748	F4	CL509	E1	FB723	E2	IC717	D2	R115	*C2	R376	*H4	R723	*F4	R1002	D3	TP952	E1
C46	B2	C359	*H4	C749	F3	CL510	E1	FB724	E2	IC720	*B3	R117	*C2	R377	H3	R724	*F4	R1003	D3	TP953	E1
C200	*B3	C360	H3	C750	*B3	CL511	E1	FB725	E2	IC721	B2	R130	*C2	R378	H4	R725	*E4	R1004	D3	TP954	F1
C201	*C3	C361	H3	C751	B3	CL563	D1	FB726	E2	IC722	B3	R132	B1	R379	H3	R727	E2	R1005	D3		
C203	B3	C362	H4	C754	E2	CL564	D1	FB727	*E2	IC723	*E2	R133	B1	R380	*H3	R728	E2	R1006	D3	X2	B2
C204	C3	C363	*H4	C755	E2	CL565	D1	FB728	*E2	IC724	*F4	R135	B1	R381	G2	R729	E2	R1007	E2	X3	B2
C205	B4	C364	*H3	C756	E2	CL700	E3	FB729	E2	IC800	*B2	R143	B2	R382	*H4	R730	E2	R1008	F2	X300	G2
C206	D2	C365	*H3	C757	E2	CL716	F3	FB730	E2	IC801	*B1	R144	B2	R383	*H4	R736	*F4				
C207	C4	C366	G2	C758	E2	CL717	F3	FB731	E2	IC900	E2	R145	B2	R384	*H3	R737	*F4	RB21	C2	*:B SIDE	
C208	*B3	C367	G2	C759	E2	CL723	B2	FB732	E2	IC951	*E1	R146	B3	R385	*H3	R738	*F4	RB22	B3		
C209	*C3	C368	H2	C760	E2	CL731	G4	FB800	*C1	IC953	*E1	R148	A2	R386	*H4	R739	*F4	RB23	C3		
C210	*B3	C369	G2	C761	E2	CL733	E4	FB801	*C1	IC955	D3	R149	C3	R387	H3	R740	*A2	RB24	C2		
C211	*B3	C371	*G3	C762	E2	CL734	E4	FB802	*C1			R150	C3	R388	*G4	R741	*B2	RB25	C3		
C212	*B4	C372	*G3	C763	E2	CL735	D3	FB803	*C1	JC16	C2	R151	*B1	R389	G2	R745	*B3	RB26	*B1		
C213	*B4	C373	*G3	C765	F4	CL736	D3	FB804	*C1	JC17	C2	R200	*B4	R390	G2	R746	A2	RB27	*B1		
C214	*C3	C374	*G3	C766	F4	CL737	F4	FB805	*C1	JC18	C2	R201	C4	R392	*G4	R747	*A2	RB33	B2		
C215	*C3	C375	*G3	C767	E3	CL738	E2	FB806	*C1	JC19	*C2	R202	*C3	R393	*H3	R748	*E4	RB34	C2		
C216	*C3	C376	*G3	C768	*F4	CL954	E2	FB807	*C1			R203	C3	R394	*H3	R749	*E2	RB35	*B1		
C217	*C3	C377	*G3	C769	*E4	CL957	E2	FB808	*C1	L300	*H3	R204	B4	R395	*H3	R754	*E2	RB36	*B1		
C218	*C4	C378	*G3	C770	*E4	CL962	E2	FB809	*C1	L301	*H3	R205	C3	R396	H3	R755	*E2	RB37	*C2		
C219	*C4	C379	*G3	C771	*F3	CL964	E1	FB810	*C1	L302	*H3	R206	*B4	R397	H3	R756	*E2	RB38	*B2		
C220	B4	C380	*F3	C772	*F4	CL981	F2	FB811	*C1	L303	*H3	R207	*C4	R398	H4	R757	*E2	RB39	B3		
C221	C3	C381	*F3	C773	F4	CL982	F2	FB812	*C1	L304	*H3	R208	B3	R401	*H3	R758	*E2	RB100	C3		
C222	B4	C382	G2	C774	*F4	CL983	F2	FB813	*C1	L700	G4	R209	C3	R402	*H4	R759	*E2	RB101	C3		
C223	B4	C383	G3	C775	E3	CL984	F2	FB814	*C1	L701	C4	R210	C3	R403	*H3	R760	*E2	RB102	C3		
C224	B3	C384	*G3	C776	*E3	CL985	F2	FB815	*C1	L702	D4	R301	H3	R404	H3	R761	E2	RB103	C3		
C225	B3	C385	*G3	C778	*E4	CL986	F2	FB816	C1	L705	G3	R305	H3	R405	*H3	R762	F4	RB104	C2		
C226	C4	C386	G3	C779	E3	CL987	F2	FB817	C1	L707	F3	R306	*G3	R406	*H3	R765	*D3	RB105	C3		
C227	C3	C387	G3	C780	*E4	CL988	F2	FB818	C1	L709	F4	R307	*F2	R407	*H3	R766	*E3	RB106	C3		
C228	C4	C388	H3	C781	*E4	CL990	F2	FB819	*D3	L710	E4	R308	*G3	R408	*G3	R767	*E3	RB107	C2		
C229	C4	C389	H2	C782	E4			FB820	*D3	L711	F3	R309	*G3	R409	*G3	R768	*E3	RB108	C2		
C230	C3	C390	H3	C784	E2	CN1	D1	FB821	*D3	L712	E3	R310	H3	R411	*G3	R769	*E3	RB109	C2		
C231	C3	C391	H3	C785	E2	CN3	B1	FB822	*D3	L900	D3	R311	F2	R413	*G3	R770	*E3	RB111	*B1		
C232	*D1	C403	F2	C786	E2	CN303	H3	FB823	*D3			R312	*F3	R414	*H3	R771	*E4	RB112	*B1		
C300	*G2	C406	*H3	C787	E2	CN304	*D2	FB824	*D3	Q1	A2	R313	F2	R415	*H4	R772	*E4	RB200	*D2		
C301	G2	C407	*H3	C788	F3	CN502	*D3	FB825	*D2	Q501	B1	R314	H4	R416	*H4	R773	*E4	RB201	*D2		
C302	G2	C408	*H3	C789	F3	CN503	*C1	FB826	*D2	Q502	B1	R315	F2	R417	*H3	R774	*E4	RB202	*D1		
C303	*G2	C410	*H3	C790	*E4	CN700	B2	FB827	*D2	Q503	B1	R316	G2	R418	*H3	R775	*E4	RB203	*D1		
C304	*G3	C413	*G3	C791	E4	CN701	*E2	FB828	*D3	Q504	B1	R317	G2	R419	*G4	R776	E4	RB204	*C3		
C305	F2	C414	*G4	C792	F3	CN800	*C1	FB829	*D2	Q700	*A2	R318	F2	R420	*G3	R779	*D3	RB205	*C3		
C306	F2	C415	*G3	C793	E3	CN951	E1	FB830	*D3	Q702	*F3	R321	G2	R421	*G3	R780	*D3	RB206	*C3		
C307	*G2	C416	*G3	C800	*B2			FB831	*D2	Q703	*F3	R322	G2	R422	*G4	R781	*D3	RB207	*C3		
C308	F2	C417	*G3	C801	*B1	D500	B1	FB832	*D3	Q704	*E3	R323	G2	R453	*G3	R782	*D3	RB208	*C2		
C309	F2	C418	H3	C802	*B1	D501	B1	FB833	*D2	Q705	*E3	R324	H3	R454	*G3	R783	*D3	RB209	*C2		
C310	F3	C419	H3	C803	D1	D502	B1	FB834	*D3	Q706	*F4	R325	G2	R455	*G3	R784	*D3	RB210	*C2		
C311	*G3	C420	*H3	C804	D1	D503	B1	FB835	*D2	Q707	*E4	R326	H3	R456	*G3	R786	E2	RB301	F2		
C312	F3	C421	*H3	C805	D1	D704	*G4	FB836	*D3	Q710	*D3	R327	H4	R457	*G3	R787	F3	RB315	G3		
C313	*G4	C422	H3	C806	D1	D706	*F3	FB837	*D2	Q711	*D3	R328	H3	R458	*G3	R790	B2	RB316	G3		
C314	F3	C423	H3	C951	*E1	D707	*E3	FB900	D3	Q900	F2	R329	H3	R460	*H3	R791	B2	RB317	G3		
C315	*H3	C424	H3	C953	*F2	D708	*E3			Q901	D3	R330	*H4	R461	*H3	R792	B2	RB318	G3		
C316	*H4	C506	D1	C954	*E2	D709	*E3	IC1	C2			R331	*H3	R462	*H3	R793	B2	RB319	G3		

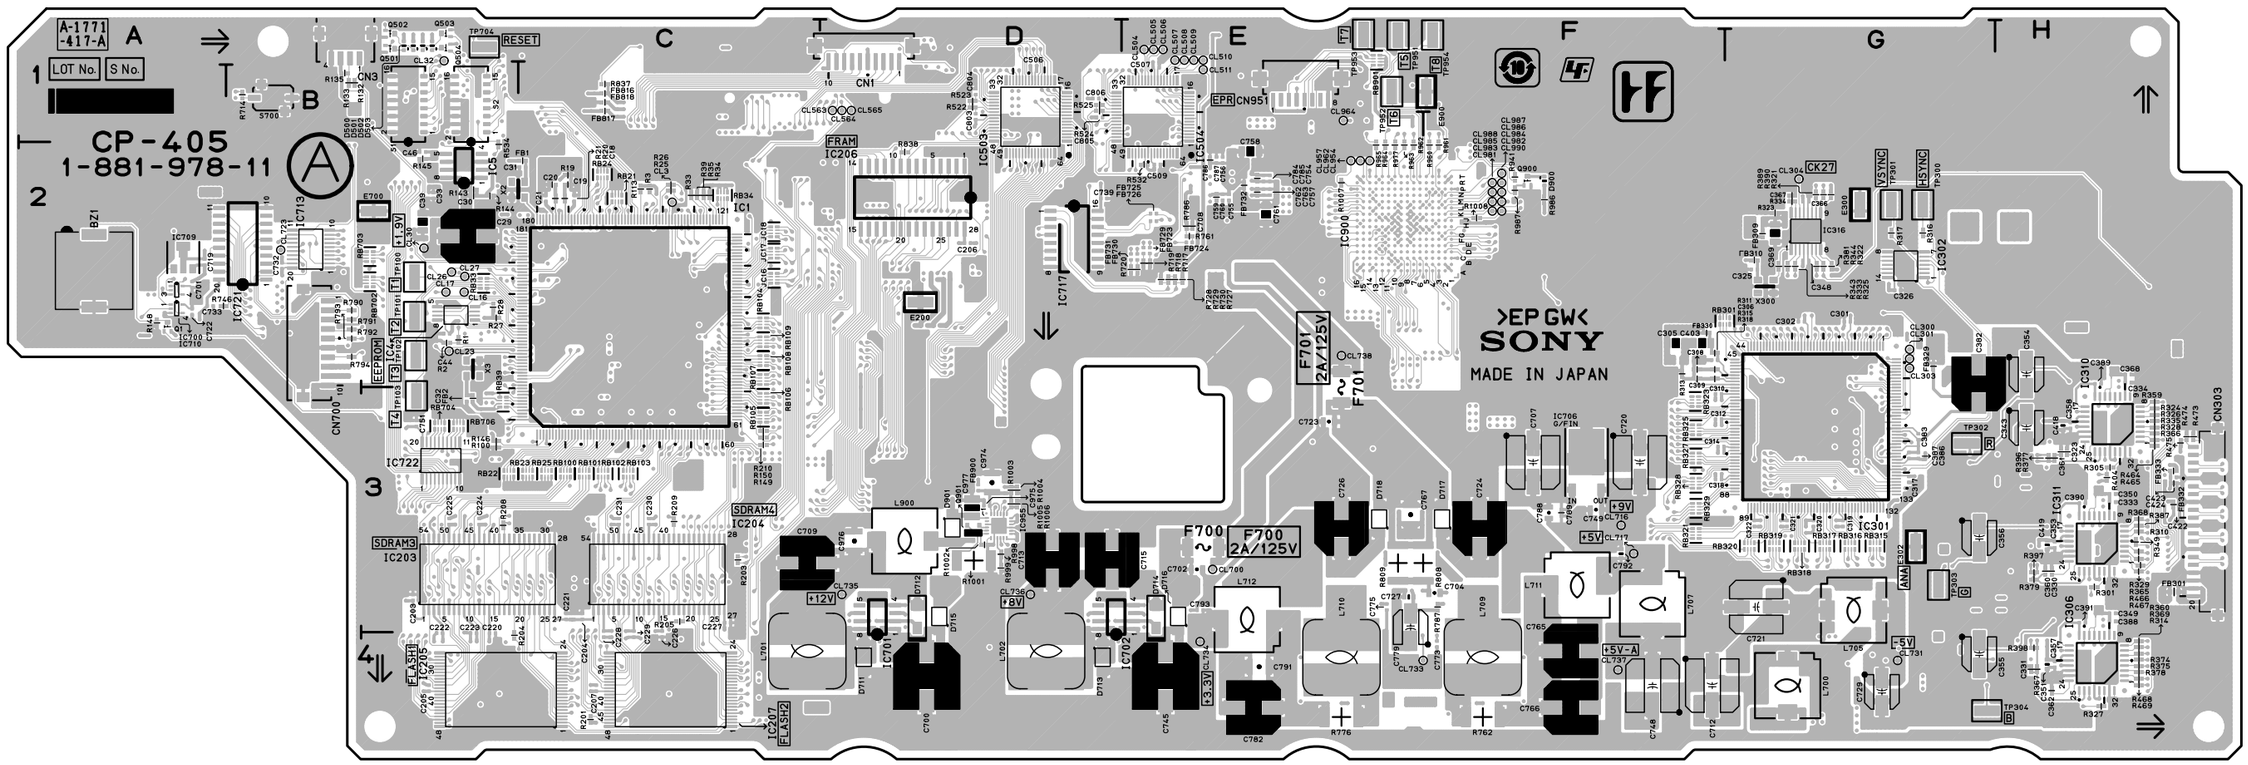

CP-405 -A SIDE-
SUFFIX: -11

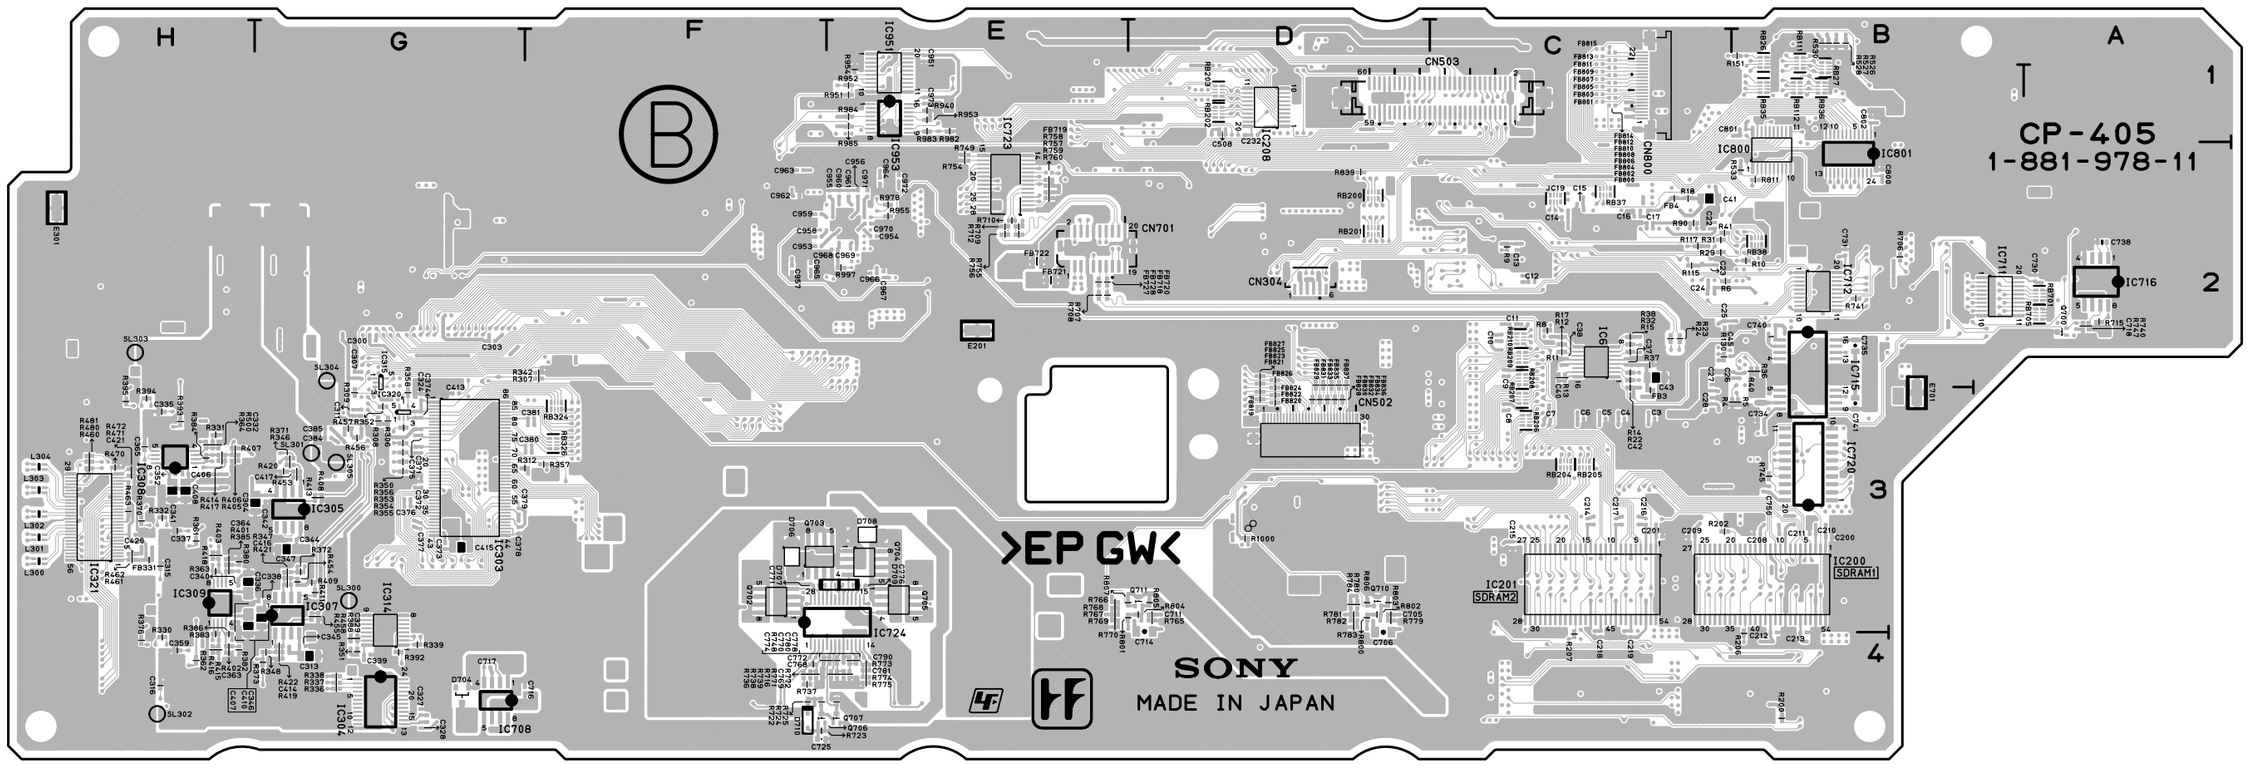

CP-405 -B SIDE-
SUFFIX: -11

CUE-13 (1-679-889-12)

C100	D1	D100	*C2	R136	*C1	R238	*A2
C101	D1	D102	D1	R137	*C1	R239	*B1
C102	*D1	D103	C2	R138	*C1	R240	*C1
C103	*D1	D107	*B1	R139	C1	R241	*D1
C104	*B1	D108	*B2	R140	C1	R242	*D1
C105	*D1	D109	*A2	R141	*C1	R243	*C1
C106	*B2	D112	*A2	R142	C1	R244	C1
C107	*D1	D113	A2	R143	*C1	R245	*C1
C109	*D1	D114	A2	R144	*B1	R246	*B2
C110	*C1	D115	*C1	R145	*C1	R247	B1
C111	*C1	D300	*D2	R146	*C1	R248	B1
C112	C1	D301	*D2	R147	*C1	R249	B1
C113	*C1			R148	*C1	R251	*B1
C114	C1	E100	C1	R149	C1	R252	B2
C115	C1	E101	*B1	R151	C1	R253	B2
C116	C1	E102	*B2	R152	C1	R254	*A2
C117	C1	E103	C2	R153	C1	R255	*A2
C118	C1			R154	*C1	R256	*D2
C119	*C1	IC100	*D2	R155	*C1	R257	*D2
C120	C1	IC101	B1	R156	*C1	R258	*D1
C121	C1	IC102	D1	R157	*C1	R259	*C1
C122	C1	IC103	C1	R158	B1	R260	C1
C123	*C1	IC104	*C1	R161	*C2	R261	C1
C124	C1	IC105	C1	R163	*C1	R262	C2
C125	C2	IC106	C1	R164	*C1	R263	*A2
C126	*C1	IC107	B1	R165	*C1	R264	*A2
C127	C1	IC108	C1	R167	*B1	R265	*A2
C128	*C2	IC109	B1	R168	*C1	R266	*A2
C130	*C1	IC110	B1	R169	*B1	R267	*A2
C131	*B1	IC111	B2	R170	*B1	R300	*C2
C132	*B1	IC112	B2	R171	B1	R301	*C2
C133	B1	IC113	A1	R172	B1	R302	*C2
C134	C1	IC114	A1	R173	*C1	R303	B2
C135	*C1	IC115	A1	R175	*B1	R304	B2
C136	*B1	IC116	A1	R176	C1	R305	B2
C137	*B1	IC117	A1	R177	*C1	R306	B2
C139	B1	IC118	A1	R178	*B1	R307	B2
C140	*B1	IC119	C1	R179	*B1	R308	B2
C141	*B2	IC120	D2	R180	*B1		
C142	*B2	IC121	D2	R181	*B1	RV100	D1
C143	*B2	IC300	C2	R182	*B1	RV101	C1
C144	*A1	IC301	C2	R183	*B1	RV102	D1
C145	B1	IC303	C2	R184	*B1	RV103	C1
C146	B1	IC304	C2	R185	*B1	RV104	B1
C147	*A1			R186	*B1	RV105	A2
C148	*A1	L300	D2	R187	*B1	RV106	A2
C149	*A1			R190	*B1	RV107	C1
C150	A1	PS300	D2	R192	*B2	RV108	A2
C151	A1	PS301	D2	R193	*B2		
C152	*A2	PS302	D2	R194	*B2	RY100	D1
C153	B2			R195	B2	RY101	A2
C154	A2	Q100	*C2	R196	*B2		
C155	A2	Q102	B1	R197	*A2	S100	C1
C156	*B1	Q104	B1	R198	*B1	S101	B2
C158	*C1	Q105	B1	R199	B2		
C159	C1	Q106	B1	R200	*A2	THP100	B1
C160	B1	Q107	B1	R201	*A2	THP101	C1
C161	B1	Q108	*A2	R202	*A2	THP300	B2
C162	B1	Q109	B1	R203	B2		
C163	*B1	Q110	B2	R204	*B2	TP100	C1
C164	B2			R205	*B2	TP101	D1
C165	B2	R100	*B2	R206	*B2	TP102	B2
C166	A1	R101	*D1	R207	*B2	TP103	A2
C167	B1	R102	*D1	R208	*B2	TP104	A2
C168	*A1	R103	*D1	R209	*B2	TP105	A2
C169	*A1	R104	*C2	R210	*A2	TP300	C2
C170	*A2	R105	*D1	R211	*B1	TP301	C2
C171	*A2	R106	*D1	R212	*B1		
C172	B1	R107	*B1	R213	*A1	*:B SIDE	
C173	*D1	R108	*D1	R214	*A1		
C174	*B1	R111	*C1	R215	*B1		
C175	*C1	R112	*C1	R216	*B1		
C176	B2	R113	*C1	R217	*B1		
C177	*D2	R114	*C1	R218	*B1		
C178	C1	R115	*C1	R219	*A1		
C300	*C2	R116	*C1	R220	*B1		
C301	*C2	R117	B1	R221	*A1		
C302	*D2	R118	B1	R222	*B1		
C303	D2	R119	*D1	R223	*A1		
C304	*D2	R120	*D1	R224	*A1		
C305	*C2	R121	*D1	R225	*A1		
C307	*D2	R122	*D1	R226	*A1		
C309	D2	R123	*B1	R227	*A1		
C310	D2	R124	*D1	R228	*A1		
C311	D2	R125	*B1	R229	*A1		
C312	D2	R126	*B1	R230	*A1		
C313	*C2	R127	*C1	R231	*C1		
C314	*B2	R128	*C1	R232	*A1		
C315	B2	R129	*D1	R233	*A1		
		R132	*D1	R234	*A1		
CN100	D1	R133	*C1	R236	*A1		
		R134	*B1	R237	*A2		

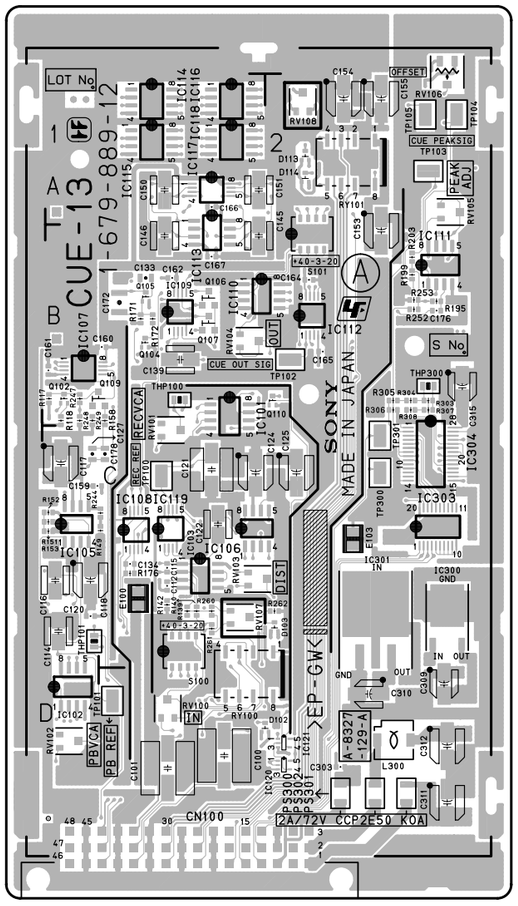

CUE-13 -A SIDE-
SUFFIX: -12

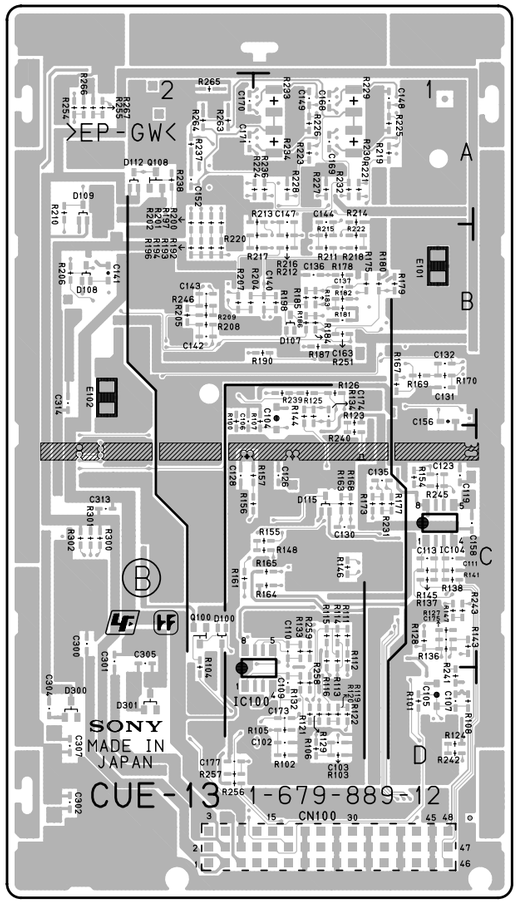

CUE-13 -B SIDE-
SUFFIX: -12

DIO-86 (1-874-868-11)

C101	A3	R104	A3
C102	A3	R109	A3
C103	A3	R110	A3
C104	A3	R111	A3
C105	A3	R113	A3
C106	A3	R114	A3
C107	A4	R115	A4
C108	A4	R116	A4
C109	A3	R120	A3
C110	A3	R121	A2
C111	A3	R122	A2
C112	A3	R126	A3
C113	A3	R131	A2
C114	A3	R133	A2
C115	A2	R134	A2
C116	A2	R135	A4
C117	A4	R137	A2
C118	A3	R138	A4
C119	A3	R139	A4
C120	A3	R140	A4
C121	A2	R141	A4
C122	A2	R142	A4
C123	A2		
C124	A3	RB101	A4
C125	A2	RB102	A4
C126	A2		
C128	A2	TP101	A2
C134	A3	TP102	A2
C135	A3	TP103	A3
C136	A3	TP104	A3
C137	A2	TP105	A3
C138	A2	TP106	A3
		TP107	A1
CL101	A3	TP108	A1
CL102	A3		
CL105	A3	X101	A4
CL106	A3	X102	A3
CL107	A3		
CL108	A3		
CL109	A3		
CN1	A3		
CN2	A4		
CN3	C1		
CT101	A2		
E101	A3		
FB1	C1		
FB2	C1		
FB4	C1		
FB5	C1		
FB7	C1		
FB8	C1		
FB9	C1		
FB10	C1		
FB11	C1		
FB12	C1		
FB13	C1		
FB14	C1		
FB15	C1		
FB16	C1		
FB17	C1		
FB18	C1		
FB19	C1		
FB20	C1		
FB21	C1		
FB22	C1		
FB23	C1		
FB24	C1		
FB25	C1		
FB26	C1		
FB27	C1		
FB28	B1		
FB29	B1		
FB31	C1		
FB32	C1		
FB33	C1		
IC102	A3		
IC104	A4		
IC105	A3		
L101	A3		
L102	A3		
L103	A4		
L106	A2		
L107	A2		
L108	A3		
L109	A4		

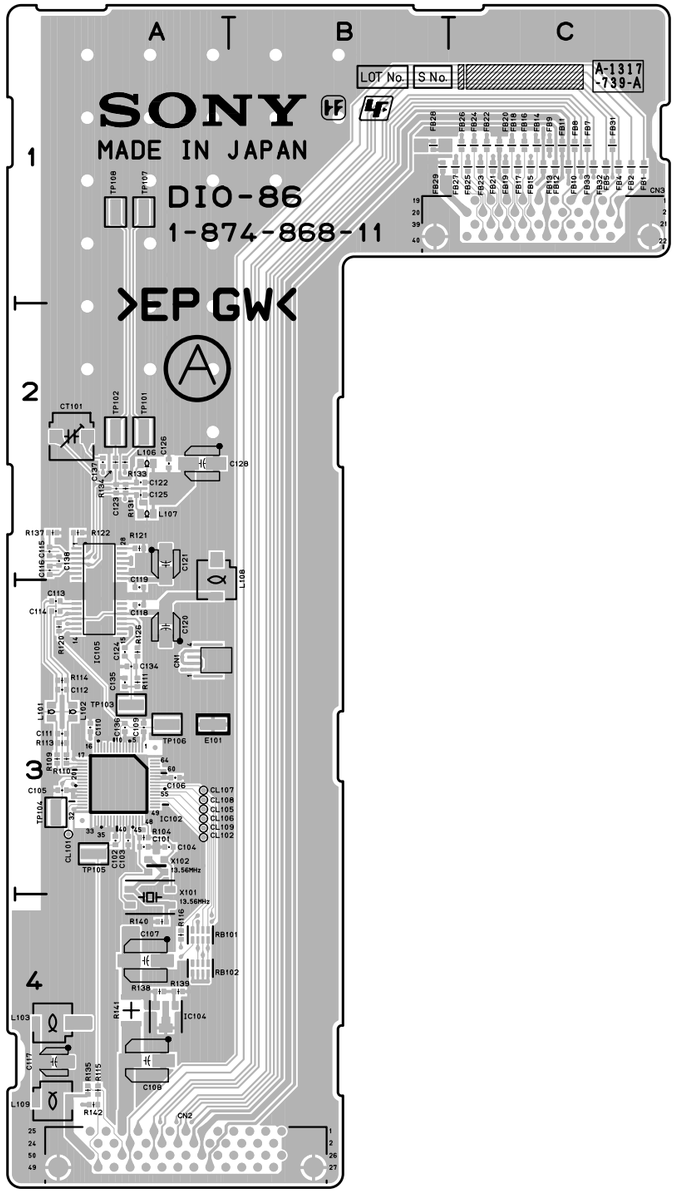

DIO-86 -A SIDE-
SUFFIX: -11

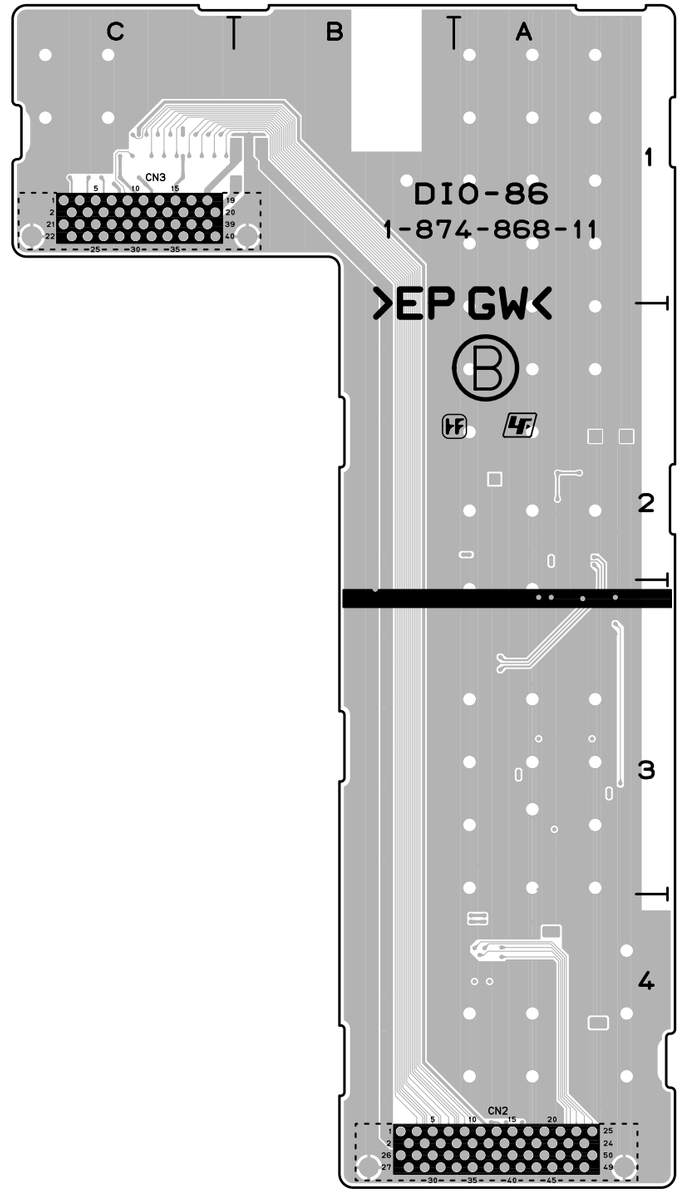

DIO-86 -B SIDE-
SUFFIX: -11

DR-508 (1-689-488-13)

A2	A1	C506	B3	C736	E2	CN207	F2	IC604	A1	Q426	*B3
A3	A3	C507	*F5	C739	*F2	CN208	F3	IC605	A2	Q500	B2
A4	B2	C508	*F5	C740	*F2	CN210	B4	IC606	A2	Q501	*B3
A5	C3	C509	*A4	C741	F1	CN212	A2	IC607	A2	Q502	*B3
A6	F2	C510	*A4	C742	E2	CN213	F2	IC608	A2	Q503	A5
		C512	A4	C743	*F2	CN214	A3	IC609	A2	Q504	A5
C100	*E2	C513	B4	C744	*F2	CN215	F2	IC610	B2	Q505	C5
C101	*E2	C514	F4	C745	F2	CN216	A4	IC611	A2	Q506	C5
C102	*E2	C515	*B3	C746	F2			IC612	A2	Q603	B1
C103	*E2	C516	A3	C747	*D2	D200	*F3	IC613	F2	Q604	B1
C104	*E2	C517	*A2	C750	*F5	D201	*F3	IC614	*A3	Q605	*B1
C105	*E2	C518	*B4	C751	F5	D202	*F3	IC615	A2	Q606	A2
C106	*E2	C519	*F3	C752	*F5	D203	*F3	IC700	D2	Q607	A2
C107	*E2	C520	A5	C753	*E5	D204	*F3	IC701	D2	Q608	A2
C108	*E2	C521	C5	C755	*F5	D205	*F3	IC703	E2	Q609	A2
C109	*F2	C522	C5	C756	*F5	D206	*F3	IC705	D2	Q700	D2
C110	*F2	C600	*F2	C757	*F5	D207	*F3	IC706	D2	Q701	D2
C111	*F2	C601	*A3	C758	*F5	D302	*C2	IC707	F5	Q702	E5
C112	*F2	C602	*A2	C759	*F5	D303	*E3	IC708	F5	Q703	*E2
C113	*E2	C603	*A2	C760	*F5	D305	*D3	IC709	F5	Q704	*E2
C114	F2	C604	*A2	C762	*E4	D306	*D3	IC800	B4	Q705	F5
C115	*E2	C605	*F2	C765	C2	D401	A3	IC801	B4	Q706	*E2
C116	*E2	C606	*A2	C766	C2	D402	*C2	IC802	D4	Q707	D2
C117	F2	C607	*F2	C768	E4	D500	B3	IC804	*B3	Q708	*E4
C118	*C1	C608	*A3	C769	E5	D501	A2	IC805	C3	Q709	E2
C119	*A4	C609	*F2	C770	*D2	D502	F3	IC1000	E3	Q710	*E2
C120	*F3	C610	*A3	C771	*F5	D503	B4	IC1001	E3	Q711	*F2
C121	*F2	C611	F2	C772	D2	D504	B2	IC1002	D4	Q712	*F2
C122	F2	C612	A2	C800	*B3	D505	F3	IC1004	*E3	Q713	*F2
C200	*A3	C614	A2	C803	*B3	D506	B4			Q714	*F2
C201	*A3	C616	A2	C804	*B3	D507	A5	L300	D3	Q715	*E1
C202	*A3	C621	A2	C805	*A4	D508	C5	L400	B3	Q716	*F2
C203	*C4	C623	*A2	C806	*B3	D509	C5	L500	B2	Q717	*F2
C204	*D4	C624	*B2	C807	*B3	D511	A5	L600	A2	Q718	E2
C205	*F3	C626	*B2	C808	*B4	D512	A5	L601	A2	Q719	*A1
C206	*B4	C627	A2	C809	*B3	D513	A5	L700	E2	Q720	*A1
C207	*F2	C629	A1	C810	*C3	D514	B3	L702	D1	Q721	*A1
C208	*F2	C632	A1	C811	*B3	D601	*B2	L703	D1	Q722	*A1
C209	A4	C635	*A2	C812	C3	D602	*A2	L704	D2	Q723	*A1
C210	*A2	C636	*A2	C813	*B3	D700	E2	L705	C1	Q724	*A2
C211	*A2	C637	A2	C816	*D3	D701	E2	L706	E1	Q725	*E4
C212	*F2	C638	A2	C817	C4	D702	F1	L707	F2	Q726	*E4
C213	*F6	C639	A2	C818	C3	D703	*E4	L708	F2	Q727	*E1
C214	*F2	C641	*A2	C819	C3	D800	*B3	L709	F2	Q800	B4
C215	A4	C642	A2	C820	*D4	D1000	*E3	L710	E1	Q801	C3
C216	*E3	C643	*A2	C823	*D3			L711	E4	Q802	*C3
C217	*F3	C644	*A2	C824	*D3	F1	D2	L712	D1	Q803	*C3
C218	*F3	C645	*A2	C1000	*E3	F400	A3	L800	B3	Q804	*C3
C219	*E3	C646	*A1	C1001	*C4	F500	A3	L801	C3	Q805	*C4
C300	*C2	C647	A2	C1002	*C3	F700	D2	L1000	E3	Q806	*C4
C301	*C2	C648	A2	C1003	*E3	F701	D1	L1001	D3	Q807	*C4
C302	*D2	C649	*A2	C1004	*E3	F702	D1			Q808	*C3
C304	*D2	C650	A2	C1005	*E3	F703	D1	PH200	F4	Q809	*C3
C305	*D2	C651	A2	C1006	*E3	F704	D1	PH201	F4	Q810	*C3
C308	*D3	C652	*A2	C1007	*E3	F705	C1	PH202	A4	Q811	*C3
C310	E3	C653	*A2	C1008	*E3	F706	E4	PH203	C6	Q812	*C3
C312	*D2	C654	*A2	C1009	*E3	F800	C3	PH204	B6	Q813	*C3
C313	*D2	C655	*A2	C1010	*E3	F1000	E3			Q1000	E3
C314	*D2	C656	*A2	C1011	*E3			Q100	*F2	Q1001	E3
C315	*D2	C657	A2	C1012	E3	IC1	E2	Q101	F2	Q1002	*E3
C316	C3	C658	*A2	C1013	*E3	IC2	C1	Q200	F4	Q1003	*E3
C317	*C3	C659	*A2	C1016	*D4	IC3	E2	Q201	F5	Q1004	*E4
C318	*C3	C700	E2	C1017	D4	IC4	A4	Q202	A4	Q1005	*E3
C319	*C2	C701	*D2	C1018	E3	IC100	F2	Q203	C6	Q1006	*D3
C320	*C2	C702	D2	C1019	D3	IC101	E2	Q204	B6	Q1007	*D3
C321	*C3	C703	*D2	C1020	*D4	IC103	F2	Q205	A2	Q1008	*D3
C324	C2	C705	E1	C1023	*D4	IC104	F3	Q206	A2	Q1009	*D3
C327	C3	C706	E1	C1024	*D4	IC105	F2	Q207	*A2	Q1010	*D3
C328	*C3	C707	E2	C1025	C2	IC106	F2	Q208	*A2	Q1011	*D4
C330	C3	C708	E2	C1026	C2	IC107	F2	Q300	E3	Q1012	*D3
C331	*D2	C709	*D2			IC200	F2	Q301	E3	Q1013	*D3
C332	D3	C710	*D2	CL100	*F2	IC201	F2	Q302	*E3		
C333	D3	C711	*D2	CL300	*E2	IC202	F6	Q303	D2	R100	*E2
C400	*C2	C712	*D2	CL301	*E2	IC205	A4	Q304	D3	R101	*E2
C401	C2	C713	*D2	CL600	*A2	IC207	F3	Q305	*D3	R102	*E2
C402	*C2	C714	B2	CL601	*A2	IC208	F3	Q306	*D3	R103	*E2
C403	*C2	C715	E2	CL602	*A2	IC209	F3	Q307	*D3	R104	*E2
C404	*C2	C716	*D2	CL603	*F2	IC210	F3	Q308	*D3	R105	*E2
C405	*C2	C719	*E2	CL604	*A3	IC300	*C2	Q309	D3	R106	*E2
C406	*C2	C720	E3	CL700	*F1	IC301	D2	Q310	*D3	R107	*E2
C407	*D2	C721	E3	CL701	*F1	IC302	D2	Q311	*D3	R108	*F2
C408	B3	C722	D2			IC303	C3	Q312	*D3	R109	*F2
C409	*B3	C723	D2	CN61	E1	IC304	D2	Q313	*C3	R110	*E2
C410	B3	C724	*D2	CN62	C1	IC305	D2	Q314	D2	R111	F2
C412	*A3	C725	*D2	CN65	B2	IC401	C2	Q315	*D2	R112	F2
C413	A3	C726	*D2	CN200	A2	IC410	A3	Q316	*D2	R113	*F3
C414	*A3	C727	*E2	CN201	F1	IC411	C2	Q317	*D3	R114	*F2
C415	*A3	C728	*D2	CN202	C3	IC500	A3	Q318	*C3	R115	*F2
C500	*A4	C729	E2	CN203	A3	IC501	A4	Q319	*D2	R116	F2
C502	*F5	C730	D2	CN204	C4	IC502	F4	Q323	*D2	R117	F2
C504	*F5	C731	*E2	CN205	D4	IC503	F5	Q400	*B3	R118	F2
C505	*F5	C733	*D2	CN206	A3	IC504	A4	Q401	*B3	R119	F2

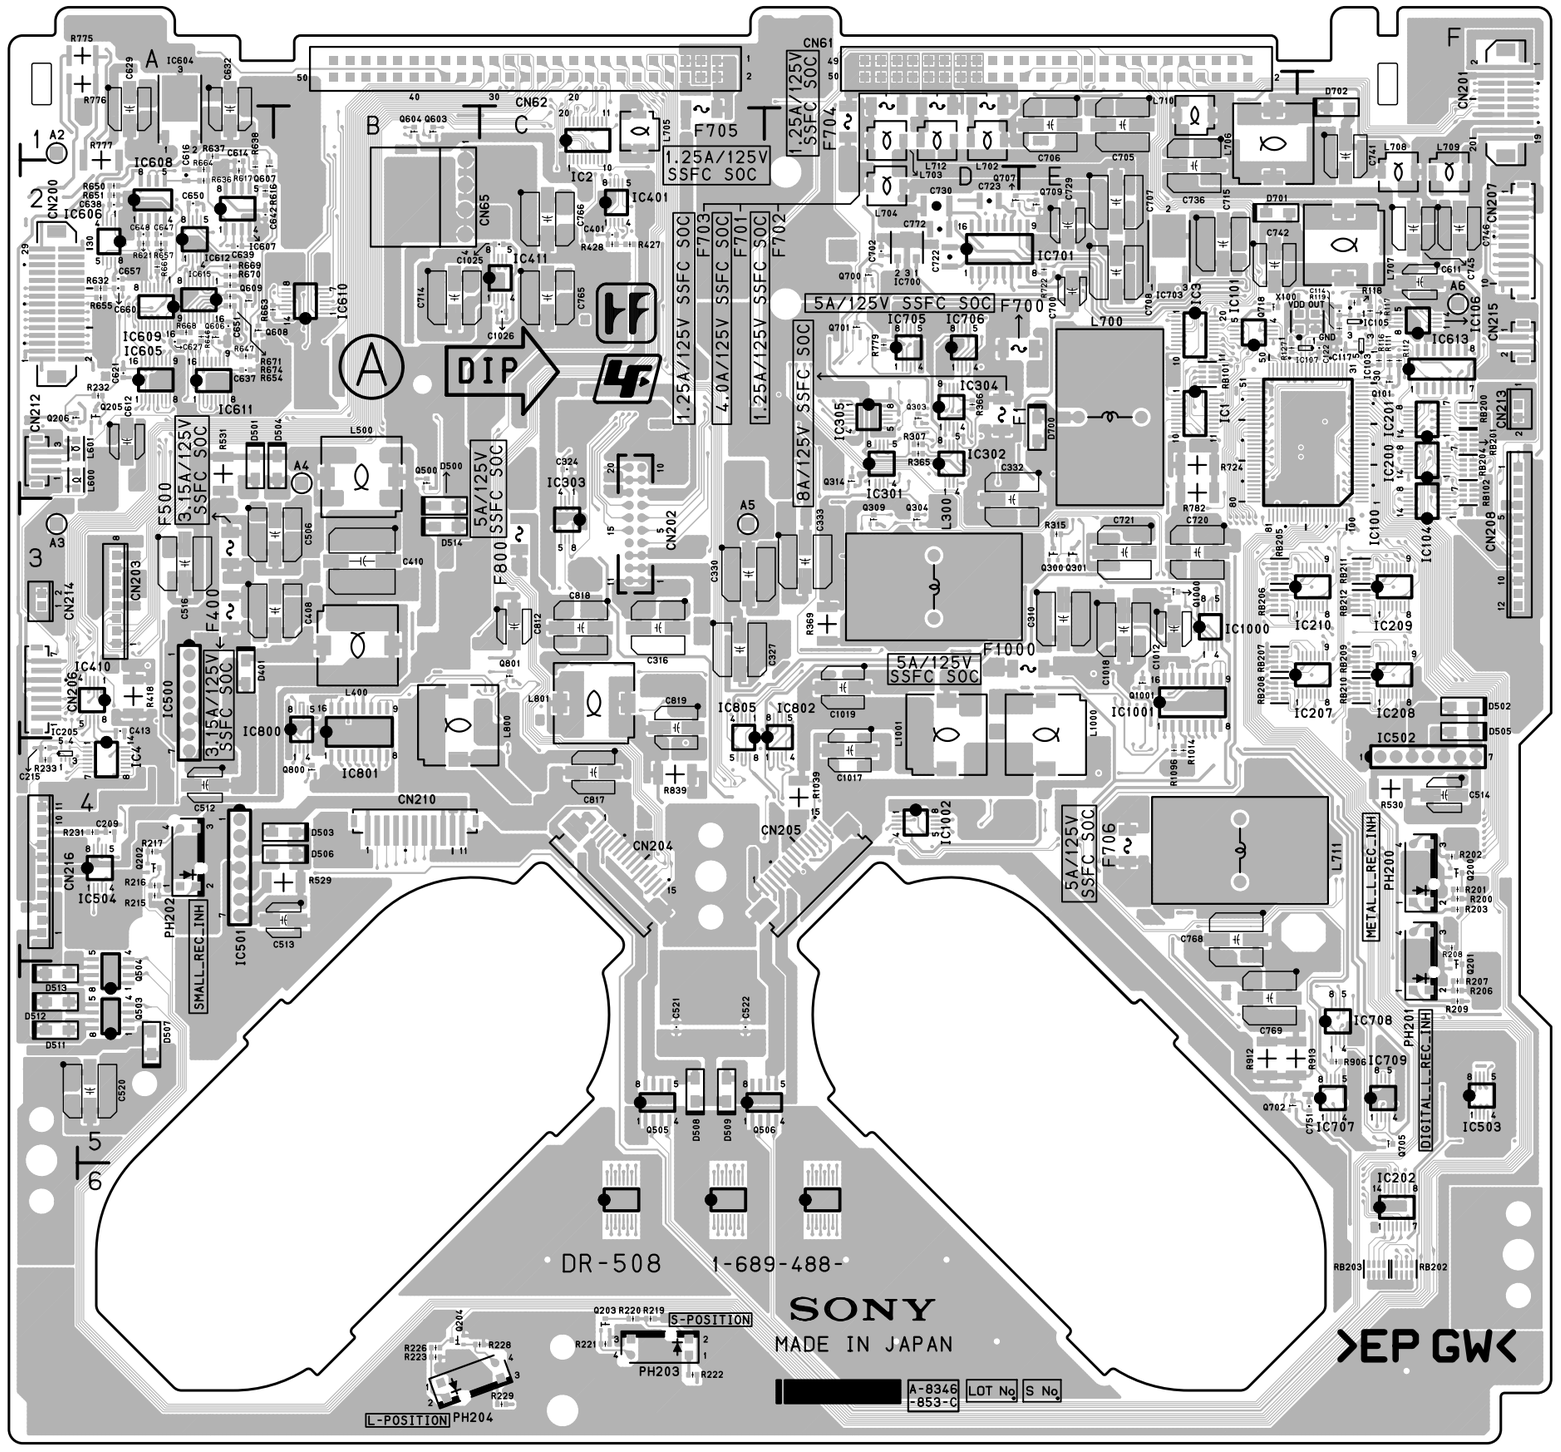

DR-508 -A SIDE-
SUFFIX: -13

SRW-5800

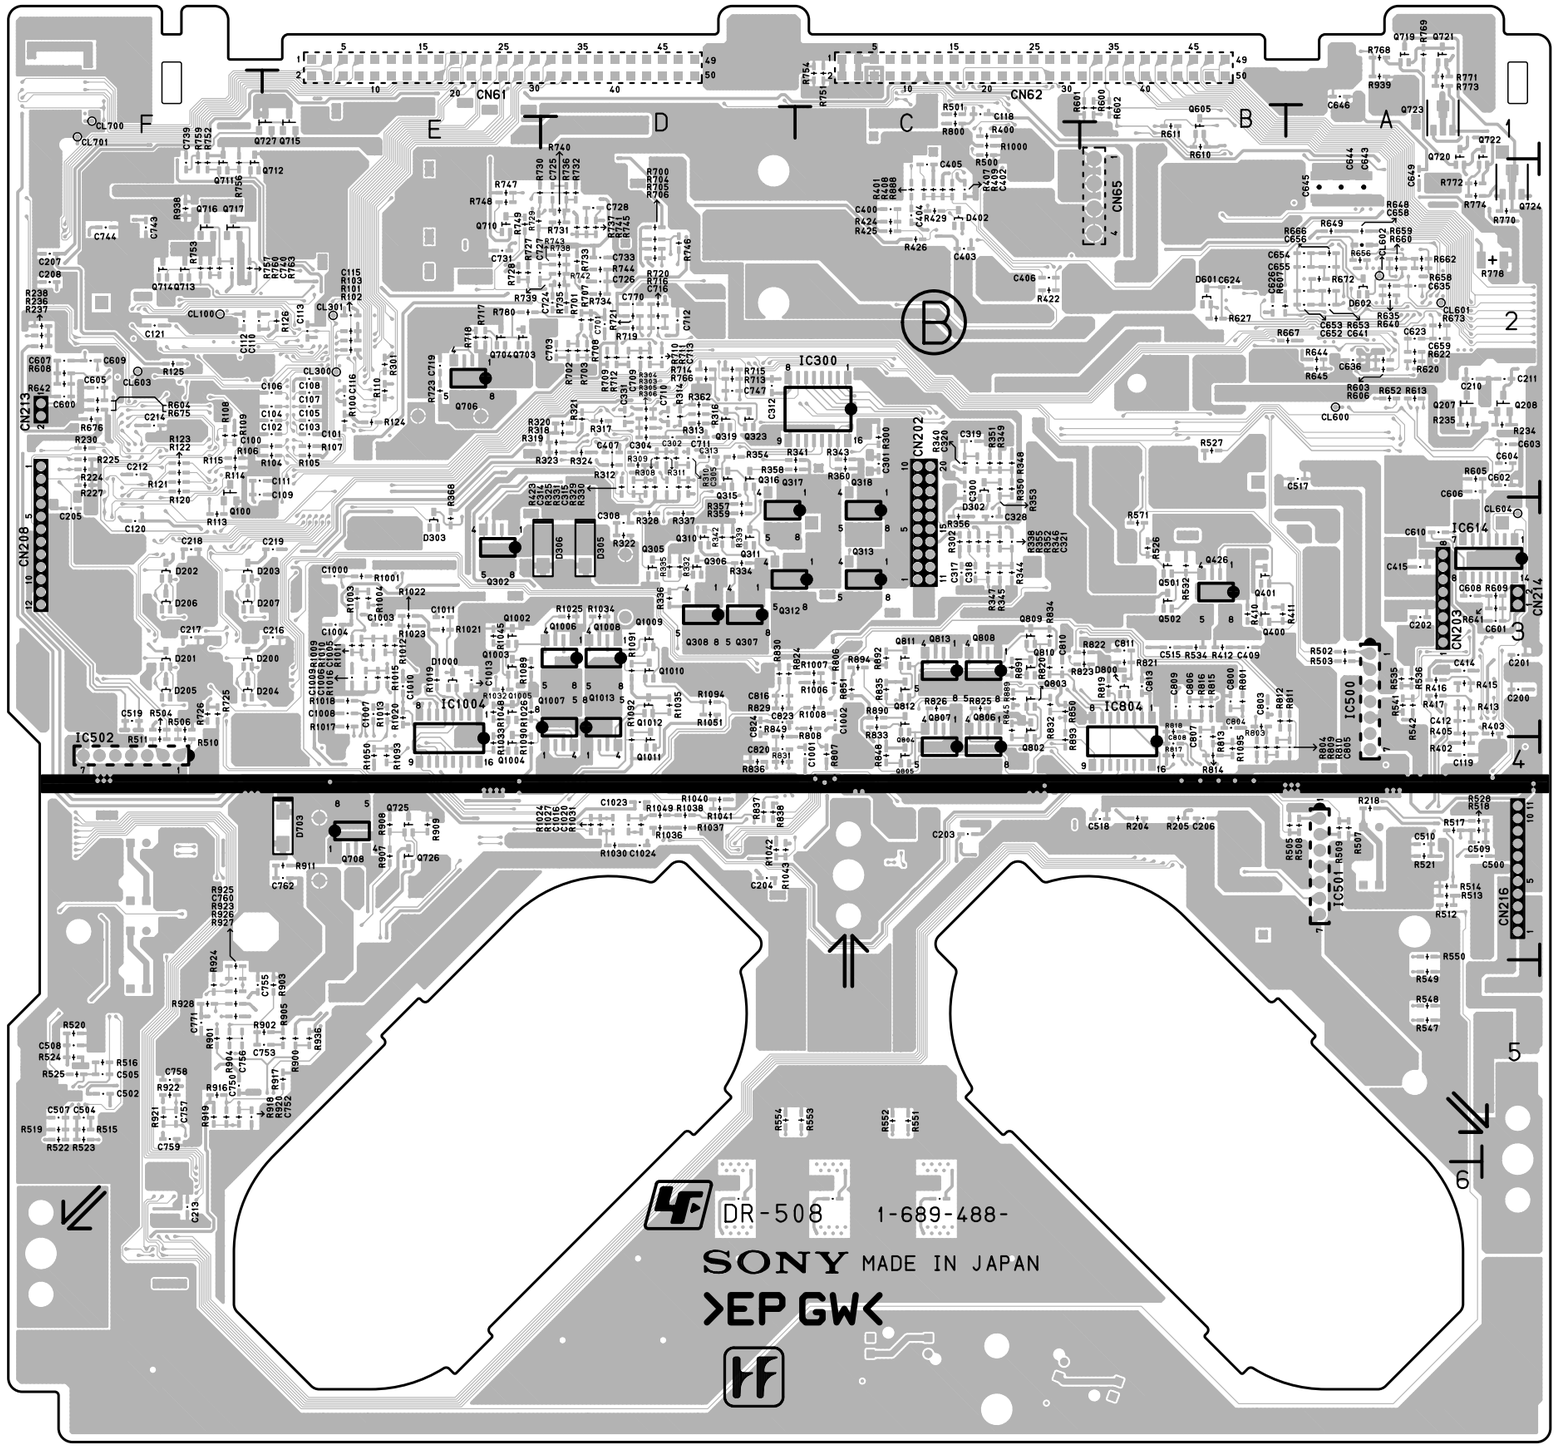

DR-508 -B SIDE-
SUFFIX: -13

R120	*F2	R353	*C2	R608	*F2	R740	*D2	R911	*E4
R121	*F2	R354	*D2	R609	*A3	R741	*D2	R912	E5
R122	*F2	R355	*C3	R610	*B1	R742	*D2	R913	E5
R123	*F2	R356	*C3	R611	*B1	R743	*D2	R916	*F5
R124	*E2	R357	*D3	R613	*A2	R744	*D2	R917	*E5
R125	*F2	R358	*C2	R616	A2	R745	*D2	R918	*F5
R126	*E2	R359	*D3	R617	A2	R746	*D2	R919	*F5
R127	E2	R360	*C2	R620	*A2	R747	*E2	R920	*F5
R200	F4	R362	*D2	R621	A2	R748	*E2	R921	*F5
R201	F4	R365	D2	R622	*A2	R749	*E2	R922	*F5
R202	F4	R366	D2	R627	*B2	R751	*C1	R923	*F5
R203	F4	R368	*E3	R632	A2	R752	*F2	R924	*F5
R204	*B4	R369	D3	R635	*A2	R753	*F2	R925	*F5
R205	*B4	R400	*C1	R636	A2	R754	*C1	R926	*F5
R206	F5	R401	*C2	R637	A1	R756	*F2	R927	*F5
R207	F5	R402	*A4	R638	A2	R757	*F2	R928	*F5
R208	F4	R403	*A3	R640	*A2	R759	*F2	R936	*E5
R209	F5	R405	*A3	R641	*A3	R760	*F2	R938	*F2
R215	A4	R407	*C2	R642	*F2	R763	*F2	R939	*A1
R216	A4	R408	*C2	R643	A2	R766	*D2	R1000	*C1
R217	A4	R409	*C2	R644	*A2	R768	*A1	R1001	*E3
R218	*A4	R410	*B3	R645	*A2	R769	*A1	R1003	*E3
R219	C6	R411	*B3	R646	A2	R770	*A2	R1004	*E3
R220	C6	R412	*B3	R647	A2	R771	*A1	R1006	*C3
R221	C6	R413	*A3	R648	*A2	R772	*A2	R1007	*C3
R222	C6	R415	*A3	R649	*A2	R773	*A1	R1008	*C3
R223	B6	R416	*A3	R650	A2	R774	*A2	R1009	*E3
R224	*F2	R417	*A3	R651	A2	R775	A1	R1010	*E3
R225	*F2	R418	A3	R652	*A2	R776	A1	R1011	*E3
R226	B6	R422	*C2	R653	*A2	R777	A1	R1012	*E3
R227	*F2	R423	*D2	R654	A2	R778	*A2	R1013	*E3
R228	B6	R424	*C2	R655	A2	R779	D2	R1014	E4
R229	C6	R425	*C2	R656	*A2	R780	*E2	R1015	*E3
R230	*F2	R426	*C2	R657	A2	R782	E2	R1016	*E3
R231	A4	R427	C2	R658	*A2	R800	*C1	R1017	*E3
R232	A2	R428	C2	R659	*A2	R801	*B3	R1018	*E3
R233	A4	R429	*C2	R660	*A2	R803	*B3	R1019	*E3
R234	*A2	R500	*C1	R661	A2	R804	*B4	R1020	*E3
R235	*A2	R501	*C1	R662	*A2	R806	*C3	R1021	*E3
R236	*F2	R502	*A3	R663	A2	R807	*C4	R1022	*E3
R237	*F2	R503	*A3	R664	A2	R808	*C3	R1023	*E3
R238	*F2	R504	*F3	R666	*A2	R809	*B4	R1024	*D4
R300	*C2	R505	*A4	R667	*A2	R810	*B4	R1025	*D3
R301	*E2	R506	*F3	R668	A2	R811	*A3	R1026	*E3
R302	*C3	R507	*A4	R669	A2	R812	*B3	R1027	*D4
R303	*D2	R508	*A4	R670	A2	R813	*B3	R1030	*D4
R304	*D2	R509	*A4	R671	A2	R814	*B4	R1031	*D4
R305	*D2	R510	*F4	R672	*A2	R815	*B3	R1032	*E3
R306	*D2	R511	*F4	R673	*A2	R816	*B3	R1033	*E4
R307	D2	R512	*A4	R674	A2	R817	*B4	R1034	*D3
R308	*D2	R513	*A4	R675	*F2	R818	*B3	R1035	*D3
R309	*D2	R514	*A4	R676	*F2	R819	*B3	R1036	*D4
R310	*D2	R515	*F5	R700	*D2	R820	*C3	R1037	*D4
R311	*D2	R516	*F5	R701	*D2	R821	*B3	R1038	*D4
R312	*D2	R517	*A4	R702	*D2	R822	*B3	R1039	D4
R313	*D2	R518	*A4	R703	*D2	R823	*B3	R1040	*D4
R314	*D2	R519	*F5	R704	*D2	R824	*D3	R1041	*D4
R315	E3	R520	*F5	R705	*D2	R825	*C3	R1042	*D4
R316	*D2	R521	*A4	R706	*D2	R826	*C3	R1043	*D4
R317	*D2	R522	*F5	R707	*D2	R829	*D3	R1045	*E3
R318	*D2	R523	*F5	R708	*D2	R830	*D3	R1048	*E3
R319	*D2	R524	*F5	R709	*D2	R831	*D4	R1049	*D4
R320	*D2	R525	*F5	R710	*D2	R832	*C3	R1050	*E4
R321	*D2	R526	*B3	R711	*D2	R833	*C3	R1051	*D3
R322	*D3	R527	*B2	R712	*D2	R834	*C3	R1089	*E3
R323	*D2	R528	*A4	R713	*D2	R835	*C3	R1090	*E4
R324	*D2	R529	B4	R714	*D2	R836	*D4	R1091	*D3
R325	*D2	R530	F4	R715	*D2	R837	*D4	R1092	*D4
R328	*D3	R531	A2	R716	*D2	R838	*D4	R1093	*E4
R329	*D2	R532	*B3	R717	*E2	R839	C4	R1094	*D3
R330	*D2	R534	*B3	R718	*E2	R845	*C3	R1095	*B4
R331	*D2	R535	*A3	R719	*D2	R848	*C4	R1096	E4
R332	*D3	R536	*A3	R720	*D2	R849	*D3		
R334	*D3	R541	*A3	R721	*D2	R850	*C3	RB101	E2
R335	*D3	R542	*A3	R722	E2	R851	*C3	RB102	F2
R336	*D3	R547	*A5	R723	*E2	R888	*C2	RB200	F2
R337	*D3	R548	*A5	R724	E2	R889	*C3	RB201	F2
R338	*C3	R549	*A5	R725	*F3	R890	*C3	RB202	F6
R339	*D3	R550	*A4	R726	*F3	R891	*C3	RB203	F6
R340	*C2	R551	*C5	R727	*E2	R892	*C3	RB204	F2
R341	*C2	R552	*C5	R728	*E2	R893	*C4	RB205	E3
R342	*D3	R553	*C5	R729	*E2	R894	*C3	RB206	E3
R343	*C2	R554	*D5	R730	*E2	R900	*E5	RB207	E3
R344	*C3	R571	*B3	R731	*D2	R901	*F5	RB208	E3
R345	*C3	R600	*B1	R732	*D2	R902	*E5	RB209	F3
R346	*C3	R601	*B1	R733	*D2	R903	*E5	RB210	F3
R347	*C3	R602	*B1	R734	*D2	R904	*F5	RB211	F3
R348	*C2	R603	*A2	R735	*D2	R905	*E5	RB212	F3
R349	*C2	R604	*F2	R736	*D2	R906	F5		
R350	*C2	R605	*A2	R737	*D2	R907	*E4	X100	F2
R351	*C2	R606	*A2	R738	*D2	R908	*E4		
R352	*C3	R607	*B2	R739	*D2	R909	*E4	*:B SIDE	

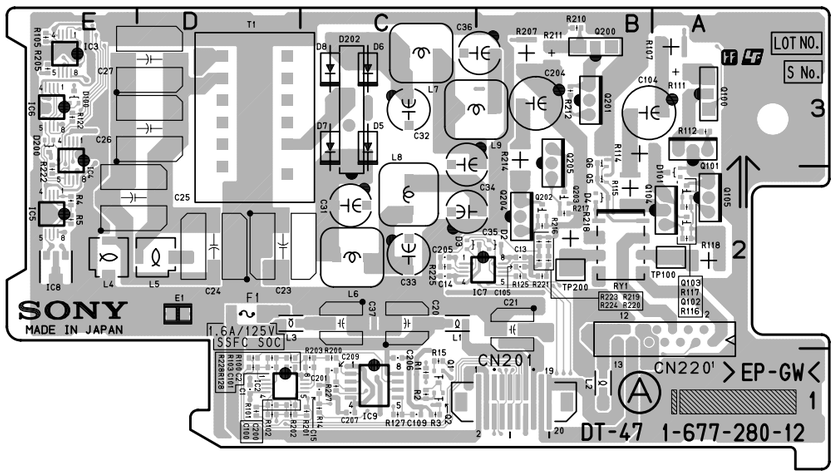

DT-47 -A SIDE-
SUFFIX: -12

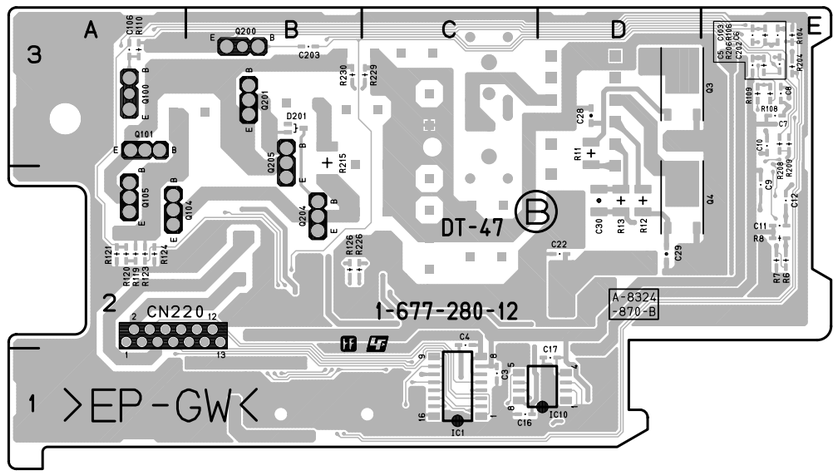

DT-47 -B SIDE-
SUFFIX: -12

DT-47 (1-677-280-12)

C1	D1	C100	D1	F1	D2	Q200	B3	R116	A2	R223	B2
C2	D1	C101	D1			Q201	B3	R117	A2	R224	B2
C3	*C1	C103	*E3	IC1	*C1	Q202	B2	R118	A2	R225	C2
C4	*C2	C104	B3	IC2	D1	Q203	B2	R119	*A2	R226	*B2
C5	*E3	C105	B2	IC3	E3	Q204	B2	R120	*A2	R227	C1
C6	*E3	C106	*A3	IC4	E3	Q205	B3	R121	*A2	R228	D1
C7	*E3	C109	C1	IC5	E2			R122	E3	R229	*C3
C8	*E3	C200	D1	IC6	E3	R1	C1	R123	*A2	R230	*B3
C9	*E2	C201	C1	IC7	C2	R2	C1	R124	*A2		
C10	*E3	C202	*E3	IC8	E2	R3	C1	R125	B2	RY1	B2
C11	*E2	C203	*B3	IC9	C1	R4	E2	R126	*B2		
C12	*E2	C204	B3	IC10	*D1	R5	E2	R127	C1	T1	D3
C13	B2	C205	C2			R6	*E2	R128	D1		
C14	C2	C206	C1	L1	C2	R7	*E2	R200	C1	TP100	A2
C15	C1	C207	C1	L2	B1	R8	*E2	R201	C1	TP200	B2
C16	*C1	C209	C1	L3	D2	R11	*D3	R202	D1		
C17	*D1			L4	E2	R12	*D2	R203	C1	*:B SIDE	
C20	C2	CN201	B1	L5	D2	R13	*D2	R204	*E3		
C21	B2	CN220	A2	L6	C2	R14	C1	R205	E3		
C22	*D2			L7	C3	R15	C1	R206	*E3		
C23	D2	D2	B2	L8	C2	R100	D1	R207	B3		
C24	D2	D3	C2	L9	B3	R101	D1	R208	*E3		
C25	E2	D4	B2			R102	D1	R209	*E3		
C26	D3	D5	C3	Q1	C1	R103	D1	R210	B3		
C27	D3	D6	C3	Q2	C1	R104	*E3	R211	B3		
C28	*D3	D7	C3	Q3	*D3	R105	E3	R212	B3		
C29	*D2	D8	C3	Q4	*D2	R106	*E3	R214	B3		
C30	*D2	D100	E3	Q5	B2	R107	A3	R215	*B3		
C31	C2	D101	A2	Q6	B3	R108	*E3	R216	B2		
C32	C3	D200	E3	Q100	A3	R109	*E3	R217	B2		
C33	C2	D201	*B3	Q101	A3	R110	*A3	R218	B2		
C34	C3	D202	C3	Q102	A2	R111	A3	R219	B2		
C35	C2			Q103	A2	R112	A3	R220	B2		
C36	B3	E1	D2	Q104	A2	R114	B3	R221	B2		
C37	C2			Q105	A2	R115	B2	R222	E2		

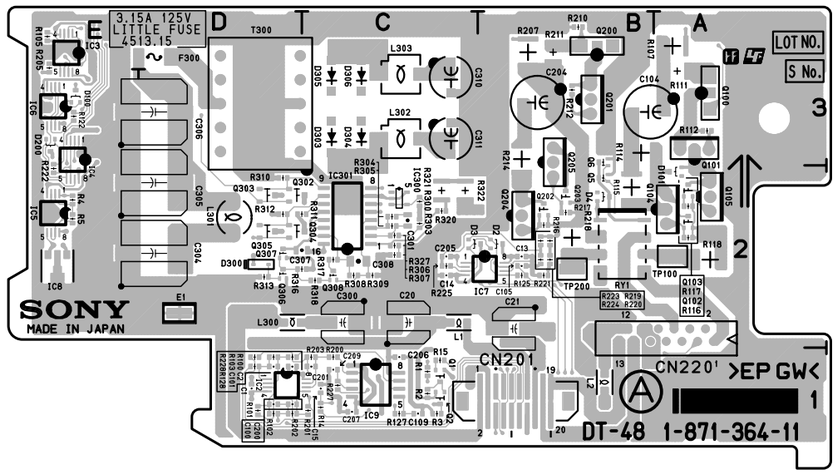

DT-48 -A SIDE-
SUFFIX: -11

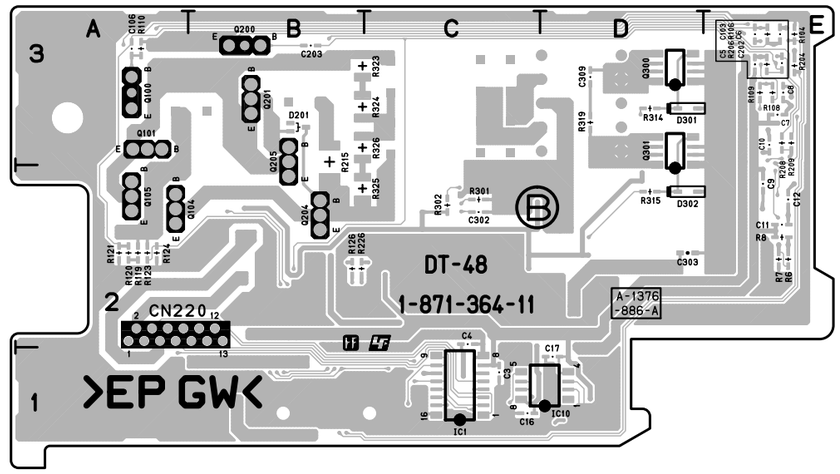

DT-48 -B SIDE-
SUFFIX: -11

DT-48 (1-871-364-11)

C1	D1	C300	C2	IC1	*C1	Q205	B3	R115	B2	R222	E2	RY1	B2
C2	D1	C301	C2	IC2	D1	Q300	*D3	R116	A2	R223	B2		
C3	*C1	C302	*C2	IC3	E3	Q301	*D3	R117	A2	R224	B2	T300	D3
C4	*C2	C303	*D2	IC4	E3	Q302	D2	R118	A2	R225	C2	TP100	A2
C5	*E3	C304	D2	IC5	E2	Q303	D2	R119	*A2	R226	*B2	TP200	B2
C6	*E3	C305	D2	IC6	E3	Q304	D2	R120	*A2	R227	C1		
C7	*E3	C306	D3	IC7	C2	Q305	D2	R121	*A2	R228	D1	*:B SIDE	
C8	*E3	C307	C2	IC8	E2	Q306	D2	R122	E3	R300	C2		
C9	*E2	C308	C2	IC9	C1	Q307	D2	R123	*A2	R301	*C2		
C10	*E3	C309	*D3	IC10	*D1	Q308	C2	R124	*A2	R302	*C2		
C11	*E2	C310	C3	IC300	C2			R125	B2	R303	C2		
C12	*E2	C311	C3	IC301	C2	R1	C1	R126	*B2	R304	C2		
C13	B2					R2	C1	R127	C1	R305	C2		
C14	C2	CN201	B1	L1	C2	R3	C1	R128	D1	R306	C2		
C15	C1	CN220	A2	L2	B1	R4	E2	R200	C1	R307	C2		
C16	*C1			L300	D2	R5	E2	R201	C1	R308	C2		
C17	*D1	D2	B2	L301	D2	R6	*E2	R202	D1	R309	C2		
C20	C2	D3	C2	L302	C3	R7	*E2	R203	C1	R310	D2		
C21	B2	D4	B2	L303	C3	R8	*E2	R204	*E3	R311	C2		
C100	D1	D100	E3			R14	C1	R205	E3	R312	D2		
C101	D1	D101	A2	Q1	C1	R15	C1	R206	*E3	R313	D2		
C103	*E3	D200	E3	Q2	C1	R100	D1	R207	B3	R314	*D3		
C104	B3	D201	*B3	Q5	B2	R101	D1	R208	*E3	R315	*D2		
C105	B2	D300	D2	Q6	B3	R102	D1	R209	*E3	R316	C2		
C106	*A3	D301	*D3	Q100	A3	R103	D1	R210	B3	R317	C2		
C109	C1	D302	*D2	Q101	A3	R104	*E3	R211	B3	R318	C2		
C200	D1	D303	C3	Q102	A2	R105	E3	R212	B3	R319	*D3		
C201	C1	D304	C3	Q103	A2	R106	*E3	R214	B3	R320	C2		
C202	*E3	D305	C3	Q104	A2	R107	A3	R215	*B3	R321	C2		
C203	*B3	D306	C3	Q105	A2	R108	*E3	R216	B2	R322	C2		
C204	B3			Q200	B3	R109	*E3	R217	B2	R323	*B3		
C205	C2	E1	D2	Q201	B3	R110	*A3	R218	B2	R324	*B3		
C206	C1			Q202	B2	R111	A3	R219	B2	R325	*B2		
C207	C1	F300	D3	Q203	B2	R112	A3	R220	B2	R326	*B3		
C209	C1			Q204	B2	R114	B3	R221	B2	R327	C2		

EQ-102 (1-874-860-11)

C100	E7	C327	*P6	C653	*M3	C940	J4	C1224	*J3	C1618	*D3	C2014	*B4	C2271	*F2	C2454	*D2	C2638	*G5	CL108	E7	D2902	K1	IC903	*L4	Q911	*K5	R249	*M6	R438	*E1	R553	*G4	R686	N3
C101	E7	C328	*P5	C654	*N3	C941	K3	C1225	*J3	C1619	*D3	C2015	*B4	C2272	*F2	C2455	*D2	C2639	*F5	CL109	E7	D2903	K1	IC904	J4	Q912	*K4	R250	*M6	R439	*E1	R554	E6	R687	N3
C102	*C7	C329	P5	C655	*N3	C942	K3	C1226	*J2	C1620	*D3	C2016	*B4	C2273	*F2	C2456	*C2	C2640	*F5	CL110	E7	D3300	M1	IC905	*L2	Q913	*K5	R251	*M6	R440	*E1	R555	*E6	R688	N4
C103	C7	C400	*N6	C656	*N3	C943	J4	C1227	*K2	C1621	*D3	C2017	*B4	C2274	*F2	C2457	*C2	C2641	*F6	CL111	E7	D3301	M1	IC906	*K4	Q914	*K5	R252	*M6	R441	*E1	R556	*E6	R689	N4
C104	D7	C401	*N6	C657	*N3	C944	*K4	C1228	K2	C1622	*D3	C2018	*B4	C2275	F2	C2458	*C2	C2642	*G5	CL112	D7	D3302	N1	IC907	*L4	Q915	*K5	R253	G7	R442	*E1	R557	*E6	R690	P3
C105	*C7	C402	*M5	C658	*N3	C945	*K4	C1229	K2	C1623	*D2	C2019	*B4	C2276	F2	C2459	*C2	C2643	*F5	CL113	D7	D3303	N1	IC908	K4	Q2900	*J5	R254	G7	R443	D5	R558	*E6	R691	P3
C106	D6	C403	*M5	C659	*P3	C946	*K5	C1230	K2	C1624	*D3	C2020	*A4	C2277	*F3	C2460	*B2	C2644	*F5	CL114	D7	D4000	M1	IC909	*K5	Q2901	*J5	R255	G7	R444	D5	R559	*E6	R692	*N2
C107	*E7	C404	*M5	C660	*N3	C947	*K5	C1231	K2	C1625	*D3	C2021	*A4	C2278	*F3	C2461	*B2	C2645	*F6	CL115	D7	D4001	M1	IC910	*M1	Q2902	J5	R256	*G6	R445	E5	R560	*E6	R693	N3
C108	*D6	C405	*N5	C661	*N4	C948	*L4	C1232	K2	C1626	*D2	C2022	*B4	C2279	*F3	C2462	*B2	C2646	*G6	CL117	G7	D4002	M1	IC911	*L1	Q2903	J5	R257	*G6	R446	*E6	R561	*E6	R694	N3
C109	*D6	C406	*N5	C662	*N3	C949	*L4	C1233	K2	C1627	*D2	C2023	*B4	C2280	*F3	C2463	*B2	C2647	H4	CL118	G7	D4003	M1	IC912	*L1	Q2904	*H5	R258	G6	R447	E5	R562	*E6	R695	N2
C110	*C7	C407	*N6	C663	*N4	C950	*L4	C1234	*K2	C1628	E2	C2024	*B4	C2281	*F3	C2464	*B3	C2648	*F6	CL119	G7	D4004	M1	IC1000	G3			R259	G6	R448	E5	R563	*E6	R696	*N2
C111	*C7	C408	*N6	C664	*N4	C951	*K4	C1235	*K2	C1629	E2	C2025	*B4	C2282	*F3	C2465	B3	C2649	*G6	CL120	G7	D4005	M1	IC1001	G2	R100	D7	R260	G6	R449	*E6	R564	E6	R697	N2
C112	*D6	C409	*M5	C665	N3	C952	*K5	C1236	*K2	C1630	E2	C2026	*B4	C2283	*F3	C2466	C3	C2650	*G6	CL121	G7	D4006	M1	IC1002	H2	R101	E7	R261	G6	R450	E5	R565	*E7	R698	M3
C113	*D6	C410	*N5	C666	N3	C953	*K5	C1237	*K2	C1631	E2	C2027	*B4	C2284	*F3	C2467	C3	C2651	*G5	CL122	G7	D4007	M1	IC1003	*K3	R102	D7	R262	G6	R451	E5	R566	*E7	R699	M3
C114	*D6	C411	*N5	C667	*M3	C954	*K5	C1238	*K2	C1632	E2	C2028	A5	C2285	*F3	C2468	C3	C2652	*F5	CL123	G7			IC1004	K3	R103	D7	R263	G7	R452	*E6	R567	*G1	R700	M3
C115	*D7	C412	*N6	C668	*N3	C955	*L4	C1239	*K2	C1633	E2	C2029	A5	C2286	*F3	C2469	C3	C2653	*F5	CL124	G7	E100	A5	IC1200	K3	R104	E7	R264	G7	R453	*E6	R568	*E6	R701	M3
C116	*D7	C413	*N6	C669	*P4	C956	*K4	C1240	*K1	C1634	*D2	C2030	A5	C2287	*F3	C2470	*D3	C2654	*F5	CL125	G7	E101	*B1	IC1201	K2	R105	E7	R265	G7	R454	E5	R569	*E6	R702	*M3
C117	*C6	C414	*M5	C670	*P4	C957	*K4	C1241	*K2	C1635	*D2	C2031	A5	C2288	*F3	C2471	*D2	C2655	*G5	CL126	F7	E102	*H1	IC1400	B3	R106	E7	R266	G7	R455	E5	R570	*E6	R703	*M3
C118	E7	C415	*M5	C671	N2	C958	*K4	C1242	*J2	C1636	*D2	C2032	A5	C2289	*E3	C2472	*D2	C2656	*G5	CL127	F7	E103	D3	IC1401	B2	R107	D7	R267	G7	R456	*E6	R571	*E6	R704	*M3
C119	*C7	C416	*M5	C672	N3	C959	*K5	C1243	*K2	C1637	*D2	C2033	A5	C2290	*F3	C2473	*D2	C2657	*F5	CL128	F7	E200	H1	IC1402	C2	R108	D7	R268	*M6	R457	E5	R572	*D6	R705	*M3
C120	C6	C417	*N5	C673	*M2	C960	*K5	C1244	*K2	C1638	*D1	C2034	*A5	C2291	*F3	C2474	*C2	C2658	*F5	CL129	F7	E201	L3	IC1403	A3	R109	E7	R269	*M6	R458	E5	R573	*E5	R706	*M3
C121	B6	C418	*N5	C674	*P3	C961	*K5	C1245	*K2	C1639	*D1	C2035	*A5	C2292	*F3	C2475	*C2	C2659	*G6	CL130	F7	E202	J6	IC1600	D3	R110	*D7	R270	*M6	R459	*E6	R574	*E6	R707	*M3
C122	A6	C419	*N6	C675	P4	C962	*L5	C1246	*K2	C1640	*D1	C2036	*B5	C2293	*E3	C2476	*C2	C2660	*L1	CL131	F7	E300	*P6	IC1601	D2	R111	D7	R271	M4	R460	E5	R575	*E5	R708	*N3
C123	A6	C420	*M6	C676	P2	C963	*K5	C1247	*K2	C1641	*D2	C2037	*B5	C2294	*F3	C2477	*C2	C2800	*H5	CL132	F7	E301	A1	IC1800	D4	R112	D7	R272	*M6	R461	E5	R576	*E6	R709	P3
C124	*B6	C421	*M5	C677	P4	C964	*L4	C1248	*K2	C1642	*D2	C2038	*B5	C2295	*F3	C2478	*C2	C2801	*H5	CL133	F7	E400	A2	IC1801	D5	R113	D7	R273	M5	R462	*E6	R577	*D6	R710	*N3
C125	*B6	C422	*N5	C678	M2	C965	*M1	C1249	*K2	C1643	*D2	C2039	*A5	C2296	*E2	C2479	*B2	C2802	*H5	CL134	D7	E401	F7	IC1802	C4	R114	D6	R274	M5	R463	E5	R578	*D6	R711	P3
C126	*A6	C423	*N5	C679	M2	C966	*L1	C1250	*K2	C1644	*D2	C2040	*B5	C2297	*F3	C2480	*B2	C2803	*H5	CL135	G7	E402	*N1	IC1803	C5	R115	D6	R275	M5	R464	E5	R579	*D6	R712	*N3
C127	*A6	C424	M6	C680	*N3	C967	*L1	C1251	*K2	C1645	*D2	C2041	*B5	C2298	*F2	C2481	*B3	C2804	*H5	CL136	G7	E600	P7	IC2000	B4	R116	D6	R276	L5	R465	*E6	R580	*D6	R713	*N3
C128	B7	C425	*M6	C681	M2	C1000	G3	C1252	*J2	C1646	*D2	C2042	*B5	C2299	*F3	C2482	*B3	C2805	*H5	CL200	N7	E800	P1	IC2001	B5	R117	D6	R277	L5	R466	E5	R581	*E7	R714	N4
C129	*B6	C426	*M4	C682	*M3	C1001	G3	C1253	*J2	C1647	*D2	C2043	*B5	C2300	*F3	C2483	B3	C2806	*H5	CL201	M6	E900	K4	IC2200	H3	R118	D6	R278	L5	R467	E5	R600	*P7	R715	N4
C130	B7	C427	*N5	C683	P3	C1002	G3	C1254	*J1	C1648	*D2	C2044	*B5	C2301	*F3	C2484	C3	C2807	*H5	CL202	M6	E901	P4	IC2201	E4	R119	D6	R279	L4	R468	*E6	R601	*P7	R716	*N3
C131	*B7	C428	*M5	C684	P2	C1003	G3	C1255	*K1	C1649	*D2	C2045	*B5	C2302	*F3	C2485	C3	C2808	*H5	CL203	M6	E1000	K2	IC2202	F4	R120	D6	R280	*M6	R469	*E6	R602	*P7	R800	*M3
C132	*C6	C429	*M6	C800	*M2	C1004	G3	C1256	*J2	C1650	*D2	C2046	*B5	C2303	*F4	C2486	C3	C2809	*H5	CL204	M6	E1400	*A7	IC2203	E2	R121	D7	R281	*M6	R470	E5	R603	*P7	R801	*M3
C133	*C6	C430	*M4	C801	*M2	C1005	G3	C1257	*J3	C1651	*D2	C2047	*B5	C2304	*F3	C2487	C3	C2810	*H5	CL205	N6	E1800	C5	IC2204	F2	R122	D7	R282	*M5	R471	E5	R604	*P7	R802	*M2
C134	*B6	C431	*M5	C802	*L2	C1006	*G3	C1258	K3	C1652	*D2	C2048	*A4	C2305	*E4	C2488	D3	C2811	*H5	CL206	N7	E2800	H4	IC2205	F3	R123	D7	R283	*M4	R472	*E6	R605	*P7	R803	*M2
C135	*B6	C432	P4	C803	*M2	C1007	*G3	C1259	K3	C1653	*D2	C2049	*A4	C2306	*E4	C2489	*B4	C2812	*H6	CL400	C5	E2801	*L3	IC2400	H4	R124	D7	R284	*M6	R473	*E6	R606	*P7	R804	*M3
C136	B6	C433	*M5	C804	*M2	C1008	*G3	C1400	A2	C1654	*D1	C2050	*B5	C2307	*F3	C2490	B3	C2813	*H5	CL401	C5	E2900	*J5	IC2401	*H2	R125	D7	R285	*M6	R474	D5	R607	*P7	R805	*L4
C137	B6	C434	*N5	C805	*L2	C1009	*G3	C1401	A3	C1655	*D1	C2051	*B5	C2308	*F2	C2491	*B4	C2814	H6	CL403	D7			IC2402	*C2	R126	D6	R286	*N6	R475	D5	R608	*N7	R806	*M3
C138	*C6	C435	*N4	C806	*M2	C1010	*G3	C1402	A3	C1656	*C2	C2052	*B5	C2309	*F3	C2492	*B4	C2815	*F5	CL600	N7	F100	B7	IC2403	*C5	R127	D6	R287	*M6	R476	*E6	R609	*N7	R807	*M3
C139	*B6	C436	*M5	C807	*M2	C1011	*G3	C1403	A3	C1657	*C2	C2053	*B5	C2310	*E3	C2493	*B4	C2816	*E5	CL601	N7	F101	B7	IC2404	*D6	R128	*C6	R288	*M6	R477	*E6	R610	*N7	R808	*M2
C140	*B6	C437	*D6	C808	*M2	C1012	*G3	C1404	A3	C1800	E4	C2054	*B5	C2311	*E3	C2494	*B5	C2817	*E5	CL602	N7	F102	A7	IC2405	*C4	R129	C6	R289	*N5	R478	*D6	R611	*N7	R809	*M2
C141	*A6	C438	*D6	C809	*M1	C1013	*G3	C1405	A3	C1801	E4	C2055	*B5	C2312	F3	C2495	*B5	C2818	*E5	CL603	P3	F103	A7	IC2600	G5	R130	*B6	R290	*M6	R479	E5	R612	*N7	R810	*M2
C142	*B6	C439	*E6	C810	*M2	C1014	*H3	C1406	*A3	C1802	E4	C2056	*B5	C2313	F3	C2496	*C5	C2819	*F5	CL800	M2			IC2601	*G5	R131	B6	R291	*M6	R480	E5	R613	*N7	R811	M2
C143	*A6	C440	*E6	C811	*M2	C1015	*G3	C1407	*A3	C1803	E4	C2057	*B4	C2314	*F3	C2497	*C5	C2820	*F5	CL801	M2	FB100	*D6	IC2604	J7	R132	*C6	R292	*M6	R481	D6	R614	*N7	R812	M2
C144	B6	C441	*E6	C812	*M1	C1016	*G3	C1408	*B3	C1804	E4	C2200	*H3	C2315	*F4	C2498	*C5	C2821	*E5	CL802	L2	FB200	M7	IC2605	H7	R133	*C6	R293	*M6	R482	D6	R615	*N7	R813	*M2
C145	A6	C442	*E6	C813	*M1	C1017	*G3	C1409	*B3	C1805	E4	C2201	*H4	C2316	E3	C2499	*C5	C2822	*E5	CL803	L2	FB201	N7	IC2606	G6	R134	*B6	R294	*M6	R483	D6	R616	*N7	R814	*M2
C146	*C6	C443	*E6	C814	*M1	C1018	*G3	C1410	*B3	C1806	*D4	C2202	*H3	C2317	*E3	C2500	*D5	C2823	*F5	CL804	N2	FB202	*M7	IC2607	J7	R135	*B6	R295	*M6	R484	D6	R617	*P7	R815	M2
C147	*B6	C444	*E6	C815	*M2	C1019	*G3	C1411	*A3	C1807	*D4	C2203	*H3	C2318	*F4	C2501	*D4	C2824	*E5	CL1000	K3	FB203	G6	IC2608	J7	R136	*B6	R296	*M5	R485	D6	R618	*P7	R816	M2
C148	*C6	C445	*E6	C816	*N2	C1020	*G2	C1412	*B3	C1808	*D4	C2204	*H3	C2319	*F2	C2502	*D4	C2825	*E5	CL1200	J3	FB400	*M4	IC2800	H5	R137	*B6	R297	*M5	R486	D6	R619	*P7	R817	*M2
C149	*A6	C446	*E6	C817	N2	C1021	*G2	C1413	*B2	C1809	*D4	C2205	*H4	C2320	*F3	C2503	*D4	C2826	*E5	CL1201	J3	FB2200	*H3	IC2801	E5	R138	*A6	R298	*N5	R487	D6	R620	*P7	R818	*M2
C150	*C6	C447	*F1	C818	*N1	C1022	*G3	C1414	*B3	C1810	*D4	C2206	*H4	C2321	*F4	C2504	C4	C2827	*E5	CL1600	C3	FB2201	*H4	IC2900	G7	R139	*A6	R300	*N5	R488	D6	R621	*P7	R819	L2
C151	*C6	C448	*E1	C819	*P2	C1023	*G3	C1415	*B2	C1811	*D4	C2207	*H4	C2322	D3	C2505	C4	C2828	*E5	CL1601	C3	FB2600	*G6	IC2901	H7	R140	*C6	R301	*N5	R489	D6	R622	*P7	R820	L2
C152	*A6	C449	E5	C820	*N2	C1024	*H3	C1416	*B3	C1812	*D3	C2208	*H4	C2323	G4	C2506	C4	C2829	F6	CL2000	C3	FB2601	*G7	IC2902	L6	R141	*C6	R302	*N5	R490	D6	R623	*P7	R821	*M2
C153	*A6	C450	M3	C821	*N2	C1025	*H3	C1417	*B3	C1813	*D4	C2209	*H4	C2324	E4	C2507	C4	C2900	*H7	CL2001	C3	FB2602	*F7	IC2903	H6	R142	*A6	R303	*N5	R491	D6	R624	*P7	R822	*M2
C200	M6	C451	*M3	C822	*N1	C1026	*G3	C1418	*B3	C1814	*D4	C2210	*H4	C2325	F4	C2508	C4	C2901	H7	CL2200	F4			IC2904	*G7	R143	*A6	R304	*N5	R492	D5	R625	*N7	R823	*M2
C201	M6	C452	*G4	C823	*P2	C1027	*G3	C1419	*B3	C1815	*D4	C2211	*H3	C2326	F3	C2509	*B4	C2902	*G7	CL2400	J1	FL900	J5	IC2905	*G7	R144	*C6	R305	N5	R493	*E6	R626	*N7	R824	M2
C202	M7	C453	*F4	C824	N1	C1028	G2	C1420	*A2	C1816	*D4	C2212	*H3	C2327	*F2	C2510	*B4	C2903	G7	CL2401	J1	FL901	J5	IC2906	*H7	R145	*A6	R306	*N5	R494	D6	R627	*N7	R825	L2
C203	N6	C454	*E7	C825	P2	C1029	G2	C1421	*A2	C1817	*D4	C2213	*H4	C2328	F2	C2511	*B5	C2904	H6	CL2402	J1	FL902	J5	IC2907	*K6	R146	*C6	R307	*N5	R495	D6	R628	*N7	R826	M2
C204	M6	C455	*E7	C826	*N1	C1030	G2	C1422	*B2	C1818	*D4	C2214	*H4	C2329	*F4	C2512	*B5	C2905	*L6	CL2403	J1	FL903	J4	IC2908	*K6	R147	*A6	R308	*N5	R496	D6	R629	*N7	R827	M2
C205	M7	C456	*F1	C827	*N1	C1031	G2	C1423	*B3	C1819	*D4	C2215	*H4	C2330	F4	C2513	*B5	C2906	H6	CL2404	C1	FL904	K4	IC2909	H7	R148	*C6	R309	P5	R497	D6	R630	*N7	R828	M2
C206	M7	C457	*F1	C828	*M2	C1032	G2	C1424	*B3	C1820	*D4	C2216	*H4	C2331	G4	C2514	*C5	C2907	G6	CL2405	C1	FL905	K5	IC2910	*K6	R149	*C6	R310	N5	R498	D6	R631	*N7	R829	M2
C207	M6	C458	*E6	C829	*M2	C1033	G2	C1425	*B3	C1821	*D4	C2217	*E4	C2400	*H3	C2515	*C5	C2908	H7	CL2406	C1	FL906	K5	IC2911	*L6	R150	*A6	R311	P5	R499	D6	R632	*N7	R830	M2
C208	M7	C600	P4	C830	*M2	C1034	*G2	C1426	*B3	C1822	*D4	C2218	*E4	C2401	*J2	C2516	*C5	C2909	*G6	CL2407	C1	FL907	K5	IC2912	K6	R151	*A6	R312	*N5	R500	D6	R633	*N7	R831	M2
C209	M7	C601	*P4	C831	L2	C1035	*G2	C1427	*B3	C1823	*D4	C2219	*E4	C2402	*H2	C2517	*C5	C2910	*G6	CL2408	C5			IC2913	*K6	R152	E7	R313	P5	R501	D6	R634	*P4	R832	M2
C210	M6	C602	*P4	C832	L2	C1036	*G2	C1428	A2	C1824	*D4	C2220	*E4	C2403	*H2	C2518	*D5	C2911	*H6	CL2409	C5	IC100	*E7	IC2914	*K7	R153	E7	R314	N5	R502	D6	R635	*P4	R833	*L2
C211	M7	C603	*P4	C833	M2	C1037	*G2	C1429	A2	C1825	*D4	C2221	*E4	C2404	*C2	C2519	*D5	C2912	*H7	CL2410	B5	IC101	C7	IC2915	H5	R154	E7	R315	N5	R503	D6	R636	*P4	R834	L2
C212	M7	C604	P4	C834	M2	C1038	*G2	C1430	A2	C1826	*D3	C2222	*E4	C2405	*C2	C2520	*D4	C2913	*K6	CL2411	C5	IC102	D7	IC2916	H6	R200	*N7	R316	*N5	R504	D6	R637	*P4	R835	*M2
C213	M7	C605	*P3	C835	M2	C1039	*G2	C1431	A2	C1827	*D3	C2223	*E4	C2406	*C2	C2521	*D4	C2914	*L6	CL2900	H7	IC103	E7	IC2917	J6	R201	*M7	R317	P5	R505	D6	R638	*P4	R836	M2
C214	*M7	C606	*P3	C836	M2	C1040	*G2	C1432	A2	C1828	E5	C2224	*E4	C2407	*J2	C2522	C4	C2915	*K6	CL2901	J6	IC104	D7	IC2918	*H6	R202	*M7	R318	N5	R506	D5	R639	*P4	R837	*M2
C215	M7	C607	*P3	C837	M2	C1041	*G2	C1433	A2	C1829	E5	C2225	*E4	C2408	*C5	C2523	C4	C2916	J6	CL2902	J6	IC105	C7	IC2919	*H6	R203	*M7	R319	P5	R507	*D6	R640	*P7	R838	*M2
C216	*M7	C608	*P3	C838	M2	C1042	*H2	C1434	*A2	C1830	E5	C2226	*F4	C2409	*C5	C2524	C4	C2917	*L6	CL2903	J6	IC106	*D7	IC2920	*J6	R204	*M7	R320	*N5	R508	*D6	R641	*P7	R839	*M2
C217	*M7	C609	*P3	C839	N2	C1043	*G2	C1435	*A2	C1831	E5	C2227	*E4	C2410	*C5	C2525	C4	C2918	*L6	CL2904	J6	IC107	D6	IC2921	J6	R205	M7	R321	N5	R509	*D6	R642	*P7	R840	*M2
C218	*M7	C610	*P4	C840	N2	C1044	*G2	C1436	*B2	C1832	E5	C2228	*E4	C2411	*C4	C2526	B4	C2919	*K6	CL2905	H7	IC108	C6	IC2922	H6	R206	M7	R322	P5	R510	*D6	R643	*P7	R841	*M2
C219	*L7	C611	*P4	C841	N2	C1045	*G2	C1437	*B2	C1833	E5	C2229	*E4	C2412	*D6	C2527	*C4	C2920	*K6	CL2906	H6	IC109	*D7	IC2923	*J6	R207	M7	R323	*L5	R511	*D6	R644	*P7	R842	*M2
C220	*L7	C612	*P3	C842	N2	C1046	*G2	C1438	*B2	C1834	*D5	C2230	*F4	C2413	*J3	C2528	*L6	C2921	*K6	CL2907	J6	IC110	D6	IC2924	*K5	R208	*M7	R324	*L5	R512	*D6	R645	*P7	R843	*L2
C221	G7	C613	*P3	C900	*J4	C1047	*G2	C1439	*A2	C1835	*D5	C2231	E4	C2414	J3	C2529	*C2	C2922	*K7	CL2908	J6	IC111	*C7	IC2925	*H6	R209	*M6	R325	*P5	R513	*D6	R646	*P7	R844	*L2
C222	*G6	C614	P3	C901	J4	C1048	*G2	C1440	*B2	C1836	*D4	C2232	*F4	C2415	*J3	C2530	*C5	C2923	*K7	CL3300	K4	IC113	C6	IC2926	*H6	R210	*M6	R326	*P5	R514	*D6	R647	*P7	R845	*M2
C223	G7	C615	*P3	C902	J4	C1049	*G2	C1441	*B2	C1837	*D4	C2233	*F4	C2416	*J2	C2600	*G5	C2924	K6	CL3301	K4	IC114	C6	IC2927	*H6	R211	*M6	R400	*P5	R515	*D6	R648	*N7	R846	*M2
C224	G6	C616	*P3	C903	J4	C1050	*G2	C1442	*B2	C1838	*D4	C2234	*F4	C2417	*J2	C2601	*G6	C2925	K6	CL3302	M4	IC115	B6	IC2928	*H6	R212	*M6	R401	*P5	R516	*D6	R649	*N7	R847	*L2
C225	G6	C617	*P3	C904	J4	C1051	*G2	C1443	*B2	C1839	*D4	C2235	*F4	C2418	*J2	C2602	*F5	C2926	*K7	CL4000	G3	IC200	*N7			R213	*M6	R402	*P5	R517	D5	R650	*N7	R848	*M2
C226	*G7	C618	*P3	C905	J4	C1052	*H2	C1444	*B2	C1840	*D4	C2236	*F4	C2419	*J2	C2603	*G5	C2927	*K7	CL4001	H4	IC201	M7	L100	C7	R214	*M6	R403	*P5	R518	*E6	R651	*N7	R849	L2
C227	G7	C619	P3	C906	J3	C1053	*H2	C1445	*B2	C1841	*D5	C2237	*F4	C2420	*J2	C2604	*G5	C2928	*K7			IC202	M5	L101	B7	R215	*M6	R404	*P5	R519	*E6	R652	*N7	R850	M2
C228	*M4	C620	*P3	C907	J3	C1054	*G2	C1446	*B2	C1842	*D5	C2238	*F4	C2421	*J2	C2605	*G6	C2929	H5	CN1	M7	IC203	L7	L102	A7	R216	*M6	R405	*P5	R520	*L3	R653	*N7	R851	*M2
C229	*M4	C621	*P3	C908	J4	C1055	*G2	C1447	*B2	C1843	*D5	C2239	*F4	C2422	*H2	C2606	*G6	C2930	H6	CN2	H7	IC204	L7	L103	A7	R217	*M6	R406	*P4	R521	*L3	R654	*N7	R852	*M2
C230	*M4	C622	*P3	C909	J3	C1056	*K3	C1448	*A2	C1844	*D5	C2240	*F4	C2423	*H2	C2607	*G5	C2931	J6	CN3	C7	IC205	G7	L104	C6	R218	*M6	R407	*P5	R522	*L3	R655	*N7	R853	*M2
C231	*M4	C623	*P3	C910	J3	C1057	*K3	C1449	*A2	C1845	*D5	C2241	*F4	C2424	*H2	C2608	*G6	C2932	*H7	CN100	D6	IC207	G6	L105	A6	R219	*M6	R408	*P4	R523	*L3	R656	*N7	R854	*M2
C232	*M4	C624	*P3	C911	J4	C1058	*H2	C1450	*B2	C1846	*D5	C2242	F4	C2425	*H2	C2609	*G6	C2933	*H6	CN300	N6	IC209	*N5	L600	*P4	R220	*M6	R409	*P4	R524	E6	R657	N4	R855	*M2
C233	*N5	C625	P3	C912	*J4	C1059	*H3	C1451	*B2	C1847	*D5	C2243	*F4	C2426	*H2	C2610	*F6	C2934	*J6	CN400	F1	IC301	L5	L601	*P4	R221	*N6	R410	*P5	R525	E6	R658	*P3	R856	*M2
C300	*L5	C626	*P3	C913	*J5	C1060	*K3	C1452	*B2	C1848	*D5	C2244	*F4	C2427	*H3	C2611	*G6	C2935	J6	CN600	P4	IC303	P5	L602	N2	R222	*N6	R411	*P5	R526	E6	R659	N3	R857	*M2
C301	*L5	C627	*P3	C914	*J4	C1061	*K3	C1453	*B2	C1849	*D5	C2245	*F4	C2428	H3	C2612	*G5	C2936	H6	CN800	M1	IC400	*P4	L603	*M2	R223	*N6	R412	*P4	R527	E6	R660	*P3	R858	*M2
C302	*L5	C628	*P3	C915	*J5	C1062	K3	C1454	*B2	C1850	*D5	C2246	G4	C2429	H3	C2613	*G5	C2937	*H7	CN801	M1	IC401	*P4	L604	*M2	R224	*N6	R413	*P5	R528	E6	R661	*M5	R859	*M2
C303	*L5	C629	P3	C916	*K4	C1200	K3	C1455	*B2	C1851	*D4	C2247	*E2	C2430	H3	C2614	J7	C2938	*H6	CN802	N1	IC402	E6	L605	*P3	R225	*N6	R414	*G1	R529	E6	R662	*M3	R860	*M2
C304	*L5	C630	*N3	C917	*K4	C1201	K3	C1456	*B2	C1852	*D5	C2248	*E2	C2431	H3	C2615	H7	C2939	*H7	CN1000	G2	IC403	*F2	L606	*P2	R226	*N7	R415	*D7	R530	E6	R663	*M3	R861	*M2
C305	*L5	C631	*N3	C918	*K4	C1202	K3	C1457	*B2	C1853	*D5	C2249	*E2	C2432	J3	C2616	*G6	C2940	*H6	CN1200	K2	IC404	*F2	L2200	D3	R227	*N7	R416	*E6	R531	E6	R664	*M3	R862	*M2
C306	*L5	C632	*N3	C919	*J5	C1203	K3	C1458	A3	C1854	*D4	C2250	*E2	C2433	*J3	C

R884	*N2	R1003	*G3	R1209	*K3	R1420	B2	R1628	D3	R1839	*D3	R2046	*A5	R2259	*F3	R2506	H1	R2815	*F6	R2997	K6	R3333	N4	R3448	M2	R3563	M3	R4049	E3	R4164	*F3	RB407	*D7	TP602	L1	X600	P2
R885	N2	R1004	*G3	R1210	*K2	R1421	*B2	R1629	*D3	R1840	*D3	R2047	*A5	R2260	*F4	R2507	*H1	R2816	*F6	R2998	K6	R3334	N4	R3449	M2	R3564	*M3	R4050	E3	R4165	*F3	RB408	*E7	TP603	P7	X2900	J6
R889	*N2	R1005	*G3	R1211	*K2	R1422	B3	R1630	*D3	R1841	*E4	R2048	*B4	R2261	*F3	R2508	*H1	R2817	*F6	R2999	K6	R3335	N4	R3450	*M3	R3565	*M3	R4051	E3	R4166	*G3	RB409	*E7	TP604	P7		
R890	N2	R1006	*G2	R1212	*K3	R1423	*B3	R1631	*D2	R1842	*E5	R2049	*B4	R2262	*F4	R2509	C1	R2818	*F6	R3000	K6	R3336	N4	R3451	*M2	R3566	*M3	R4052	E3	R4167	G4	RB410	*E7	TP605	P7	*:B SIDE	
R891	*N2	R1007	*G2	R1213	*K3	R1424	B3	R1632	*E3	R1843	*E5	R2050	*B4	R2263	*F3	R2510	C1	R2819	*F6	R3001	K6	R3337	N4	R3452	*N2	R3567	*M3	R4053	E3	R4168	F4	RB411	*E6	TP606	P7		
R892	N2	R1008	*G2	R1214	*K3	R1425	*B3	R1633	*D2	R1844	E5	R2051	*B4	R2264	*E3	R2511	C1	R2820	*F5	R3002	K6	R3338	*N4	R3453	*N2	R3568	M3	R4054	*E3	R4169	F4	RB412	D7	TP607	P7		
R893	*N2	R1009	*G2	R1215	*K3	R1426	B3	R1634	*D2	R1845	*E5	R2052	*A5	R2265	*F2	R2512	*C1	R2821	*F5	R3003	K6	R3339	*N4	R3454	*P2	R3569	M3	R4055	*E3	R4170	F3	RB413	*E7	TP608	L1		
R894	*N2	R1010	*G3	R1216	*K3	R1427	*B3	R1635	*D2	R1846	*D4	R2053	*B5	R2266	*E4	R2513	C5	R2822	*F5	R3004	K6	R3340	*N4	R3455	*P2	R3570	*M3	R4056	*E3	R4171	F3	RB414	*E7	TP609	P7		
R895	*N2	R1011	*G3	R1217	*K3	R1428	B3	R1636	*D2	R1847	*E5	R2054	*B5	R2267	*E4	R2514	C5	R2823	*G1	R3005	K6	R3341	*N4	R3456	M2	R3571	*M3	R4057	E3	R4172	*F3	RB415	*E7	TP610	N7		
R896	N2	R1012	*G3	R1218	J3	R1429	*B3	R1637	D2	R1848	*D5	R2055	*B5	R2268	*F3	R2515	C5	R2824	*G1	R3006	K6	R3342	N4	R3457	M2	R3572	*M3	R4058	*E3	R4173	*F3	RB416	*E6	TP611	N7		
R897	*N2	R1013	*G3	R1219	*J3	R1430	*B2	R1638	D2	R1849	*D5	R2056	*B5	R2400	*C4	R2516	C5	R2825	*G1	R3007	K6	R3343	N4	R3458	*M2	R3573	*M3	R4059	*E3	R4174	*G3	RB601	*P1	TP612	N7		
R898	*M2	R1014	*G3	R1220	J3	R1431	*B3	R1639	*D2	R1850	*D5	R2057	*B5	R2401	*H4	R2600	*G5	R2826	*G1	R3008	K6	R3344	N4	R3459	*M3	R3574	M3	R4060	*E3	R4175	G4	RB602	*P1	TP613	N7		
R900	*L4	R1015	*G3	R1221	*J3	R1432	*A2	R1640	*D2	R1851	*D5	R2058	*B5	R2402	L7	R2601	*G5	R2827	*G1	R3009	K6	R3345	N4	R3460	*N3	R3575	M3	R4061	*E3	R4176	F4	RB800	*M1	TP614	N7		
R901	*L4	R1016	*G3	R1222	J3	R1433	*B3	R1641	*E3	R1852	*D4	R2059	*B5	R2403	*J4	R2602	*G6	R2828	*G1	R3010	K6	R3346	*N4	R3461	*N2	R3576	*M3	R4062	E3	R4177	F4	RB801	*M1	TP615	N7		
R902	*L4	R1017	*G3	R1223	*J3	R1434	*B3	R1642	*E2	R1853	*D4	R2060	B5	R2404	*H4	R2603	*G6	R2831	*H5	R3011	K6	R3347	*N4	R3462	*M2	R3577	M4	R4063	E3	R4178	F4	RB802	*N1	TP616	L1		
R903	J4	R1018	H2	R1224	J3	R1435	*B3	R1643	*E2	R1854	*D5	R2061	*B5	R2405	*J4	R2604	*G6	R2832	*H5	R3012	K6	R3348	*N4	R3463	*M2	R3578	M4	R4064	E3	R4179	F3	RB2200	*H3	TP617	N6		
R904	J4	R1019	*H2	R1225	*J3	R1436	*B3	R1644	E2	R1855	*D5	R2062	B5	R2406	*J2	R2605	*G6	R2835	*E5	R3013	K6	R3349	*N4	R3464	N2	R3579	*M4	R4065	*E3	R4180	F3	RB2201	*H4	TP618	P6		
R905	J4	R1020	H3	R1226	J3	R1437	B3	R1645	*D2	R1856	*D5	R2063	*B5	R2407	*J4	R2606	*G6	R2836	*E5	R3014	K6	R3350	*N4	R3465	N2	R3580	*M4	R4066	*E3	R4181	*F3	RB2202	*G4	TP619	P6		
R906	J4	R1021	*H3	R1227	*J3	R1438	B3	R1646	*D1	R1857	*D5	R2064	B5	R2408	*J4	R2607	*G6	R2900	H7	R3015	*J5	R3351	*N4	R3466	*N3	R3581	M3	R4067	*E3	R4182	*F3	RB2203	*G4	TP620	P6		
R907	*J4	R1022	H3	R1228	J3	R1439	*A3	R1647	*E1	R1858	*D5	R2065	*B5	R2410	*J3	R2608	*F6	R2901	H7	R3016	*J5	R3352	*N4	R3467	*N2	R3582	*M3	R4068	E3	R4183	*G3	RB2600	*H6	TP621	P6		
R908	J3	R1023	*H3	R1229	*J3	R1440	*A3	R1648	*D2	R1859	*D5	R2066	B5	R2411	*J3	R2609	*F6	R2902	*H7	R3017	J5	R3353	*N4	R3468	*M2	R3583	*M3	R4069	*E3	R4184	G4	RB2601	*H6	TP622	P6		
R909	*K4	R1024	H3	R1230	*K3	R1441	*A2	R1649	*D2	R1860	D5	R2067	*B5	R2412	*J2	R2610	*F6	R2903	*G7	R3018	H6	R3354	*N4	R3469	*N2	R3584	M3	R4070	*E3	R4185	F4	RB2602	H7	TP623	N6		
R910	*J4	R1025	*H3	R1231	*K2	R1442	*A2	R1650	*D2	R1861	*D5	R2068	B5	R2413	*J2	R2611	*F6	R2904	*G7	R3019	H6	R3355	N4	R3470	*M2	R3585	M3	R4071	*E3	R4186	F3	RB2604	H7	TP624	P6		
R911	*J5	R1026	H3	R1232	*K3	R1443	*A2	R1651	*D2	R1862	D5	R2069	*B5	R2414	*J2	R2612	*F6	R2905	*H7	R3020	H6	R3356	N4	R3471	*M2	R3586	*M3	R4072	*E3	R4187	F3	RB2605	H7	TP625	P6		
R912	*J5	R1027	*H3	R1233	*K2	R1444	A2	R1652	*D1	R1863	*D5	R2070	B5	R2415	*J2	R2613	*F6	R2906	*G7	R3021	J6	R3357	*N4	R3472	N2	R3587	*M3	R4073	*E3	R4188	*F4	RB2606	*F7	TP626	P6		
R913	*J5	R1028	H3	R1234	*K2	R1445	*A2	R1653	*D1	R1864	D5	R2071	*B5	R2416	*J2	R2614	*F6	R2907	*H7	R3022	H6	R3358	*N4	R3473	*N2	R3588	*M3	R4074	*E3	R4189	*F4	RB2607	*F7	TP627	P6		
R914	*K4	R1029	*H3	R1235	*J3	R1446	*A2	R1654	*D2	R1865	*D5	R2072	*B4	R2417	*J2	R2615	*F6	R2908	*H7	R3023	H6	R3359	N4	R3474	*N3	R3589	M3	R4075	E3	R4190	*G4	RB2608	J7	TP628	P6		
R915	*J4	R1030	*G2	R1236	*J2	R1447	*A2	R1655	*D2	R1866	D5	R2073	*B5	R2418	*J2	R2616	*F6	R2909	*G7	R3024	J6	R3360	N4	R3475	*N3	R3590	M3	R4076	E3	R4191	F4	RB2609	J7	TP629	N6		
R916	*J5	R1031	*G3	R1237	J3	R1448	*B1	R1656	*D2	R1867	*D5	R2074	*A5	R2419	*J2	R2617	*F6	R2910	H6	R3025	J6	R3361	N4	R3476	*N2	R3591	M3	R4077	E3	R4192	F4	RB2610	J7	TP630	P6		
R917	*J5	R1032	*G3	R1238	J2	R1449	*B1	R1657	*D2	R1868	D5	R2075	*B5	R2420	*J2	R2618	*F6	R2911	H6	R3026	J6	R3362	N4	R3477	*N2	R3592	*M3	R4078	*E3	R4193	F4	RB2611	J7	TP631	P6		
R918	*J5	R1033	*G3	R1239	*K2	R1450	*B1	R1658	*D2	R1869	*D5	R2076	*B5	R2421	*J2	R2619	*F6	R2912	H6	R3027	J6	R3363	*N4	R3478	*N3	R3593	*M3	R4079	*E3	R4194	F3	RB2612	H7	TP800	M2		
R919	*J4	R1034	*G3	R1240	*K2	R1451	*B1	R1659	*D2	R1870	D5	R2077	*B5	R2422	*J2	R2620	*F6	R2913	H7	R3028	J5	R3364	*N4	R3479	*N2	R3594	*M3	R4080	*E3	R4195	F3	RB2900	G7	TP801	M2		
R920	*J5	R1035	*H3	R1241	*K3	R1452	*A2	R1660	D2	R1871	*D5	R2078	*B5	R2423	*J2	R2621	*F6	R2914	*G7	R3029	*H5	R3365	N4	R3480	*N2	R3595	*M2	R4081	E3	R4196	*F4	RB2901	*L5	TP802	M2		
R921	*J5	R1036	*H3	R1242	*K2	R1453	*B2	R1661	*D2	R1872	*D5	R2079	B5	R2424	*H2	R2622	*F6	R2915	*K6	R3030	J6	R3366	N4	R3481	*N2	R3596	M3	R4082	E3	R4197	*F4	RB3300	*N1	TP803	M2		
R922	*J5	R1037	H3	R1243	*K2	R1454	*B2	R1662	D2	R1873	*D4	R2080	B5	R2425	*H2	R2623	*G5	R2916	*K6	R3031	*H6	R3367	N4	R3482	N2	R3597	M3	R4083	E3	R4198	*G4	RB3301	*P1	TP804	N2		
R923	*K4	R1038	H3	R1244	K2	R1455	*B2	R1663	*D2	R1874	*E5	R2081	*A5	R2426	*H2	R2624	*H5	R2917	*H7	R3032	*J7	R3368	N4	R3483	N2	R3598	M3	R4084	E3	R4199	*E2	RB3302	N3	TP805	N2		
R924	*K4	R1039	*G3	R1245	K2	R1456	*B2	R1664	D2	R1875	*D4	R2082	*A5	R2427	J3	R2625	*G5	R2918	*K6	R3033	*J6	R3369	*N4	R3484	*N2	R3599	*M3	R4085	*E3	R4200	*E3	RB3303	N3	TP900	K1		
R925	*K4	R1040	*G3	R1246	*K2	R1457	*B2	R1665	*D2	R1876	*D4	R2083	*A4	R2428	*J4	R2626	*G5	R2919	*K6	R3034	*J6	R3370	*N4	R3485	*N2	R3600	*M3	R4086	*E3	R4201	*E2	RB3304	N4	TP901	J6		
R926	*J5	R1041	*G2	R1247	*K2	R1458	*B2	R1666	D2	R1877	*D5	R2084	B4	R2429	*J2	R2627	H6	R2920	*K6	R3035	*J6	R3371	M4	R3486	N2	R3601	*M3	R4087	*E3	R4202	*F2	RB3305	N4	TP902	K1		
R927	*J5	R1042	*G2	R1248	*K2	R1459	*B2	R1667	*D2	R1878	*D5	R2085	B4	R2430	*J3	R2628	H6	R2921	*K6	R3036	*H7	R3372	M4	R3487	N2	R3602	*M3	R4088	*E3	R4203	*F2	RB3306	*N3	TP903	K5		
R928	*J5	R1043	*G2	R1249	*K2	R1460	B2	R1668	D2	R1879	D5	R2086	*G1	R2431	*H2	R2629	H6	R2922	*K7	R3037	*H7	R3373	M4	R3488	N2	R3603	*M2	R4089	E3	R4204	*F2	RB3307	*N3	TP904	K5		
R929	*J5	R1044	G2	R1250	*K2	R1461	*B2	R1669	*D2	R1880	D5	R2087	*B4	R2432	*H2	R2630	H6	R2923	*L1	R3038	*H6	R3374	M4	R3489	N2	R3604	M3	R4090	*E3	R4205	*F2	RB3308	*N4	TP1000	G3		
R930	*J5	R1045	*G2	R1251	*K2	R1462	B2	R1670	D2	R1881	*D4	R2088	*B4	R2433	*H2	R2631	H6	R2924	L6	R3039	*J7	R3375	N4	R3490	*N2	R3605	M3	R4091	*E3	R4206	*F2	RB3309	*N4	TP1001	G2		
R931	*J5	R1046	*G2	R1252	*K2	R1463	*B2	R1671	*D2	R1882	*D4	R2089	*B4	R2434	*J2	R2632	H6	R2925	L6	R3040	J6	R3376	N4	R3491	*N2	R3606	*M3	R4092	E3	R4207	*F3	RB3310	N3	TP1002	D1		
R932	*J5	R1047	*G2	R1253	*K1	R1464	B2	R1672	*D2	R1883	*E5	R2090	*B4	R2435	*H2	R2633	H6	R2926	L7	R3041	*J6	R3377	*N4	R3492	N2	R3607	*M3	R4093	E3	R4208	*F2	RB3311	N3	TP1003	G3		
R933	*J5	R1048	*G2	R1254	*K1	R1465	*B2	R1673	*D1	R1884	D4	R2091	*B4	R2436	*H2	R2634	H6	R2927	L7	R3042	*J7	R3378	*M4	R3493	N2	R3608	*M3	R4094	*E3	R4209	F3	RB3312	N3	TP1004	G2		
R934	*J5	R1049	*G2	R1255	*K2	R1466	B2	R1674	*B2	R1885	D4	R2092	*B4	R2437	*H2	R2635	*G6	R2928	L6	R3043	*J6	R3379	*M4	R3494	N2	R3609	*M2	R4095	*E3	R4210	*H1	RB3313	N3	TP1005	G1		
R935	*J4	R1050	*G2	R1256	*K2	R1467	*B2	R1675	*D1	R1886	*C4	R2093	*C4	R2438	*C2	R2636	*G6	R2929	*K1	R3044	J7	R3380	*M4	R3495	N3	R3610	*M2	R4096	*E3	R4211	*H1	RB3314	*N3	TP1006	C1		
R936	*J4	R1051	*G2	R1257	*K2	R1468	B2	R1676	*D1	R1887	*C4	R2094	*C4	R2439	*C2	R2637	*G5	R2930	K6	R3045	J6	R3381	M3	R3496	*N2	R3611	M3	R4097	*E3	R4212	*H1	RB3315	*N3	TP1007	G2		
R937	*K4	R1052	*G2	R1258	*K2	R1469	*B2	R1677	*D2	R1888	*C4	R2095	*C4	R2440	*C2	R2638	*H5	R2931	L6	R3046	J7	R3382	M3	R3497	*N2	R3612	M3	R4098	E3	R4213	*H1	RB3316	*N3	TP1200	K2		
R938	*J4	R1053	*G2	R1259	*K2	R1470	B2	R1678	*D2	R1889	*C4	R2096	*C4	R2441	*C2	R2639	*G5	R2932	L6	R3047	*H7	R3383	M3	R3498	*N2	R3613	*M3	R4099	*E3	R5000	*M2	RB3317	*N3	TP1201	K3		
R939	*J5	R1054	*G2	R1260	*K2	R1471	*B2	R1679	D2	R1890	*C4	R2097	*C4	R2442	*C2	R2640	*G5	R2933	*K6	R3048	*H6	R3384	N4	R3499	N2	R3614	*M3	R4100	E3	R5001	M2	RB4000	E4	TP1202	D1		
R940	*J4	R1055	*G2	R1261	J2	R1472	*B2	R1680	D2	R1891	*C4	R2098	*C4	R2443	*C2	R2641	H6	R2934	K6	R3049	*H7	R3385	N4	R3500	N2	R3615	*M3	R4101	E3	R5002	*M2	RB4001	E4	TP1203	K2		
R941	*J5	R1056	*G2	R1262	*J2	R1473	*B2	R1681	*D1	R1892	*C4	R2099	*C4	R2444	*C2	R2642	*G6	R2935	*K1	R3050	*H6	R3386	*M4	R3501	N2	R3616	*M2	R4102	*E3	R5003	M2	RB4002	E4	TP1204	K1		
R942	*K4	R1057	*G2	R1263	J2	R1474	*A2	R1682	*D1	R1893	*C4	R2100	*C4	R2445	*C2	R2643	*G5	R2936	K6	R3051	*J7	R3387	*M4	R3502	N3	R3617	M3	R4103	*E3	R5004	M2	RB4003	E4	TP1205	K2		
R943	*J4	R1058	*G2	R1264	*J2	R1475	*B2	R1683	*E2	R1894	*C4	R2101	*C4	R2446	*C2	R2644	*G5	R2937	K6	R3052	*J6	R3388	M4	R3503	N3	R3618	M3	R4104	*E3	R5005	M2	RB4004	*E4	TP1206	D1		
R944	K5	R1059	*G2	R1265	J2	R1476	*B2	R1684	D2	R1895	*C4	R2102	*C4	R2447	*C2	R2645	*G5	R2938	K6	R3053	J6	R3389	M4	R3504	*N2	R3619	*M3	R4105	*E3	R5007	*M2	RB4005	*E4	TP1207	K1		
R945	K5	R1060	H2	R1266	*J2	R1477	*B2	R1685	D2	R1896	*C4	R2103	*A5	R2448	*C2	R2646	*G5	R2939	K7	R3054	H6	R3390	M3	R3505	*N2	R3620	*M3	R4106	E3	R5008	*M2	RB4006	*E4	TP1208	B1		
R946	*L4	R1061	*H2	R1267	J2	R1478	*B2	R1686	*G1	R1897	*C4	R2200	*H4	R2449	*C2	R2647	*G5	R2940	K7	R3055	H7	R3391	M3	R3506	*N2	R3621	*M3	R4107	E3	R5009	*M2	RB4007	*E4	TP1209	B1		
R947	*L4	R1062	H2	R1268	*J2	R1479	B2	R1687	*C3	R1898	*C4	R2201	*H4	R2450	*C2	R2648	*F5	R2941	K7	R3056	J7	R3392	M4	R3507	N2	R3622	M3	R4108	E3	R5010	*M2	RB4008	F4	TP1210	C1		
R948	*L2	R1063	*H2	R1269	J2	R1480	B2	R1688	*C3	R1899	*C4	R2202	*H4	R2451	*C2	R2649	G4	R2942	L6	R3057	*H7	R3393	N4	R3508	N2	R3623	*M3	R4109	*E3	R5011	M2	RB4009	F4	TP1211	C1		
R949	*K4	R1064	H2	R1270	*J2	R1481	*A2	R1689	*C3	R1900	*C4	R2203	*H4	R2452	*C2	R2650	*G4	R2943	L6	R3058	*H6	R3394	M4	R3509	N2	R3624	*M3	R4110	F3	R5012	M2	RB4010	F4	TP1212	J3		
R950	*K4	R1065	*H2	R1271	J2	R1482	*A2	R1690	*C3	R1901	*C4	R2204	E4	R2453	*C2	R2651	G4	R2944	L6	R3059	*H7	R3395	M4	R3510	N3	R3625	M3	R4111	F3	R5013	M2	RB4011	F4	TP1213	J3		
R951	K4	R1066	H2	R1272	*J2	R1483	*A2	R1691	*C3	R1902	*C4	R2205	*E4	R2454	C3	R2652	G4	R2945	L6	R3060	*H6	R3396	M3	R3511	N3	R3626	M3	R4112	*F3	R5014	M2	RB4012	*F4	TP1400	B3		
R952	K4	R1067	*H2	R1273	*K2	R1484	B2	R1692	*C3	R1903	*C4	R2206	F4	R2455	*C3	R2653	*G4	R2946	*K7	R3061	*J7	R3397	M3	R3512	N3	R3627	*M2	R4113	*F3	R5015	M2	RB4013	*F4	TP1401	A2		
R953	K4	R1068	H2	R1274	*K1	R1485	B2	R1693	*C3	R1904	*C4	R2207	*F4	R2456	*C2	R2654	G4	R2947	K6	R3062	*J6	R3398	M3	R3513	*N2	R3628	M3	R4114	*F3	R5016	N2	RB4014	*F4	TP1402	F1		
R954	*K4	R1069	*H2	R1275	*K2	R1486	*C3	R1694	*C3	R1905	*C4	R2208	*E2	R2457	*C2	R2655	G4	R2948	K6	R3063	J7	R3399	M4	R3514	*N2	R4000	*G4	R4115	F3	R5017	N2	RB4015	*F4	TP1403	B3		
R955	K3	R1070	H2	R1276	*K1	R1487	*C3	R1695	*C3	R1906	*E4	R2209	*E2	R2458	*C2	R2656	*G4	R2949	K7	R3064	H6	R3400	M4	R3515	*N2	R4001	*F4	R4116	F3	R5018	M2	RB4016	E2	TP1404	B2		
R956	*K4	R1071	*H2	R1277	*K1	R1488	*C3	R1696	*C3	R1907	*E4	R2210	*F2	R2459	*J2	R2657	G4	R2950	K7	R3065	H7	R3401	M4	R3516	N2	R4002	F4	R4117	F3	R5019	M2	RB4017	E2	TP1405	A1		
R957	*K5	R1072	*G2	R1278	*J2	R1489	*C3	R1697	*C3	R2000	*A4	R2211	*F2	R2460	*H2	R2658	G4	R2951	*K6	R3066	G7	R3402	M4	R3517	N3	R4003	*F4	R4118	*F3	R5500	*M1	RB4018	E2	TP1406	F1		
R958	*K5	R1073	*G2	R1279	*J2	R1490	*C3	R1698	*C3	R2001	*A4	R2212	G4	R2461	*J2	R2659	*G4	R2952	*K7	R3067	*J6	R3403	M3	R3518	N3	R4004	*F4	R4119	*F3	R5501	*L2	RB4019	E2	TP1407	B2		
R959	*K5	R1074	*G2	R1280	J2	R1491	*C3	R1699	*C3	R2002	A4	R2213	H4	R2462	*H2	R2660	G4	R2953	*K7	R3068	*J6	R3404	M3	R3519	N3	R4005	F4	R4120	*F3			RB4020	*E2	TP1600	D2		
R960	*K4	R1075	*G2	R1281	J2	R1492	*C3	R1700	*C3	R2003	*A4	R2214	H4	R2463	*H2	R2661	G4	R2954	*L5	R3069	*K6	R3405	M4	R3520	*N2	R4006	*F4	R4121	*F3	RB100	*C7	RB4021	*E2	TP1601	D3		
R961	*K4	R1076	*G2	R1282	*K1	R1493	*C3	R1701	*C3	R2004	*A4	R2215	H4	R2464	*H2	R2662	*G4	R2955	K7	R3070	*K6	R3406	M4	R3521	*N2	R4007	*F3	R4122	F3	RB101	*D7	RB4022	*E2	TP1602	D1		
R962	*K5	R1077	*H2	R1283	*K1	R1494	*C3	R1702	*C3	R2005	*A4	R2216	*F4	R2465	*C2	R2663	G4	R2956	K7	R3071	*K6	R3407	M3	R3522	*N2	R4008	*F4	R4123	F3	RB102	*C7	RB4023	*E2	TP1603	D2		
R963	*K5	R1078	*H2	R1284	*K2	R1495	*B3	R1703	*E2	R2006	*B4	R2217	*F4	R2466	*C2	R2664	G4	R2957	K7	R3072	*H6	R3408	M4	R3523	*P2	R4009	F4	R4124	F3	RB103	*C7	RB4024	F2	TP1604	D1		
R964	*K5	R1079	H2	R1285	J2	R1496	*B3	R1800	*E4	R2007	*B4	R2218	*F4	R2467	*H2	R2665	*G6	R2958	K7	R3073	*H6	R3409	M4	R3524	N2	R4010	*F4	R4125	F3	RB104	*D7	RB4025	F2	TP1605	D2		
R965	*K4	R1080	H2	R1286	J2	R1497	*B3	R1801	*E4	R2008	*B4	R2219	*G4	R2468	*H2	R2666	*G6	R2959	L7	R3074	L6	R3410	M4	R3525	N2	R4011	*F4	R4126	*F3	RB105	*C7	RB4026	F2	TP1606	D1		
R966	*K5	R1081	*G2	R1287	*H1	R1498	*B3	R1802	E4	R2009	*B4	R2220	*G4	R2469	*C2	R2667	*G6	R2960	L7	R3075	L6	R3411	M3	R3526	N3	R4012	*E4	R4127	*F3	RB106	*D7	RB4027	F2	TP1607	D1		
R967	*K5	R1082	*G2	R1288	*J3	R1499	*B3	R1803	*D4	R2010	*A4	R2221	*F2	R2470	*J2	R2668	*G6	R2961	K7	R3076	L6	R3412	M3	R3527	N3	R4013	*E4	R4128	*G3	RB107	C7	RB4028	*F2	TP1608	E1		
R968	*K5	R1083	*G2	R1289	*J3	R1500	*C3	R1804	*D4	R2011	*B4	R2222	G3	R2471	*J2	R2669	G6	R2962	K6	R3077	*H6	R3413	*M4	R3528	*N2	R4014	*F4	R4129	F3	RB108	C7	RB4029	*F2	TP1609	E1		
R969	*L4	R1084	*K3	R1290	*J3	R1501	*C3	R1805	*E4	R2012	*B4	R2224	*F2	R2472	*C2	R2670	G6	R2963	K6	R3078	*H6	R3414	*M4	R3529	*P2	R4015	*M1	R4130	*F3	RB109	D7	RB4030	*F2	TP1610	C1		
R970	*L4	R1085	*K3	R1291	*J3	R1502	*C3	R1806	*D4	R2013	*B4	R2225	*F2	R2473	*H2	R2671	*G6	R2964	K7	R3300	*P2	R3415	*N4	R3530	*P2	R4016	*M1	R4131	F3	RB110	D7	RB4031	*F2	TP1611	C1		
R971	*L4	R1086	*K3	R1292	*J3	R1503	*B3	R1807	*D4	R2014	*B4	R2226	*F2	R2474	*H2	R2672	*G6	R2965	*K7	R3301	*P2	R3416	*N4	R3531	*M1	R4017	*M1	R4132	F3	RB111	D7			TP1612	C3		
R972	*L4	R1087	H2	R1293	*J3	R1504	*C3	R1808	*D4	R2015	*B4	R2227	*F2	R2475	*H2	R2673	G6	R2966	K7	R3302	N3	R3417	N4	R3532	*M1	R4018	*M1	R4133	F3	RB112	C7	S400	D5	TP1613	C3		
R973	*K4	R1088	H2	R1294	*J3	R1505	*C3	R1809	*D4	R2016	*B4	R2228	*F2	R2476	*C4	R2674	G6	R2967	K7	R3303	P3	R3418	*N4	R3533	*N1	R4019	*M1	R4134	*F3	RB113	C7	S401	A1	TP1800	D3		
R974	*K4	R1089	*H3	R1295	*J3	R1506	*A2	R1810	*D3	R2017	*B4	R2229	*F2	R2477	*C5	R2675	G6	R2968	K7	R3304	P3	R3419	*M4	R3534	*N1	R4020	*M1	R4135	*F3	RB114	*C7	S402	A1	TP1801	D4		
R975	*K5	R1090	*H3	R1296	*J3	R1600	*E3	R1811	*D3	R2018	B4	R2230	*E2	R2478	*C5	R2676	*H5	R2969	K7	R3305	P3	R3420	N4	R3535	M4	R4021	*M1	R4136	*G3	RB115	*C7	S403	F7	TP1802	F1		
R976	*K5	R1091	*H3	R1297	*J3	R1601	*E3	R1812	*D4	R2019	*B4	R2231	*E2	R2479	*C5	R2677	*G5	R2970	K7	R3306	P3	R3421	*M4	R3536	M4	R4022	*M1	R4137	*G3	RB116	*C6	S601	P1	TP1803	D3		
R977	*K5	R1092	*H3	R1298	*J3	R1602	E2	R1813

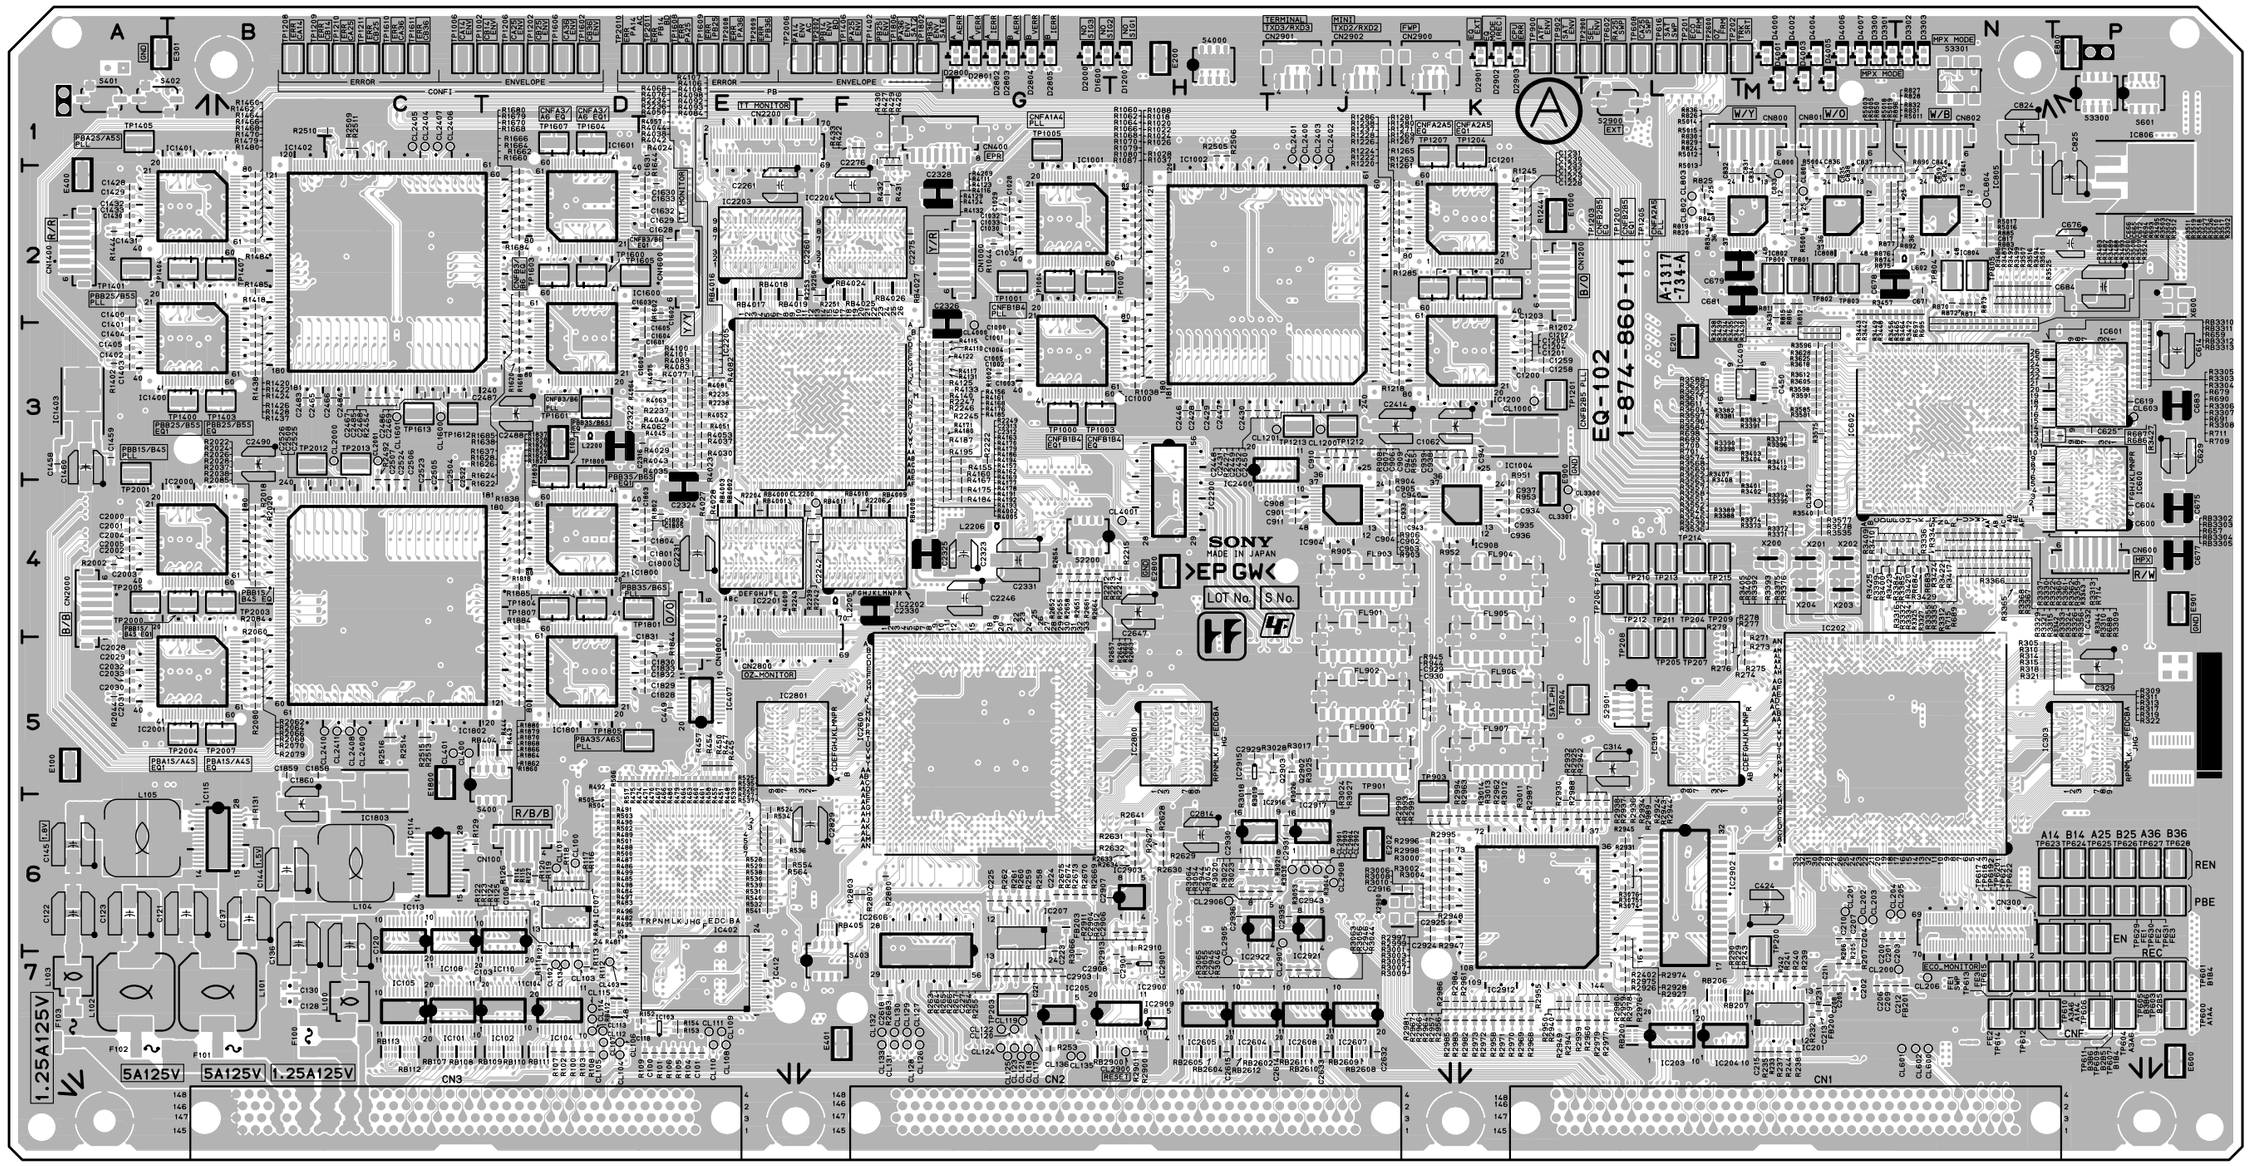

EQ-102 -A SIDE-
SUFFIX: -11

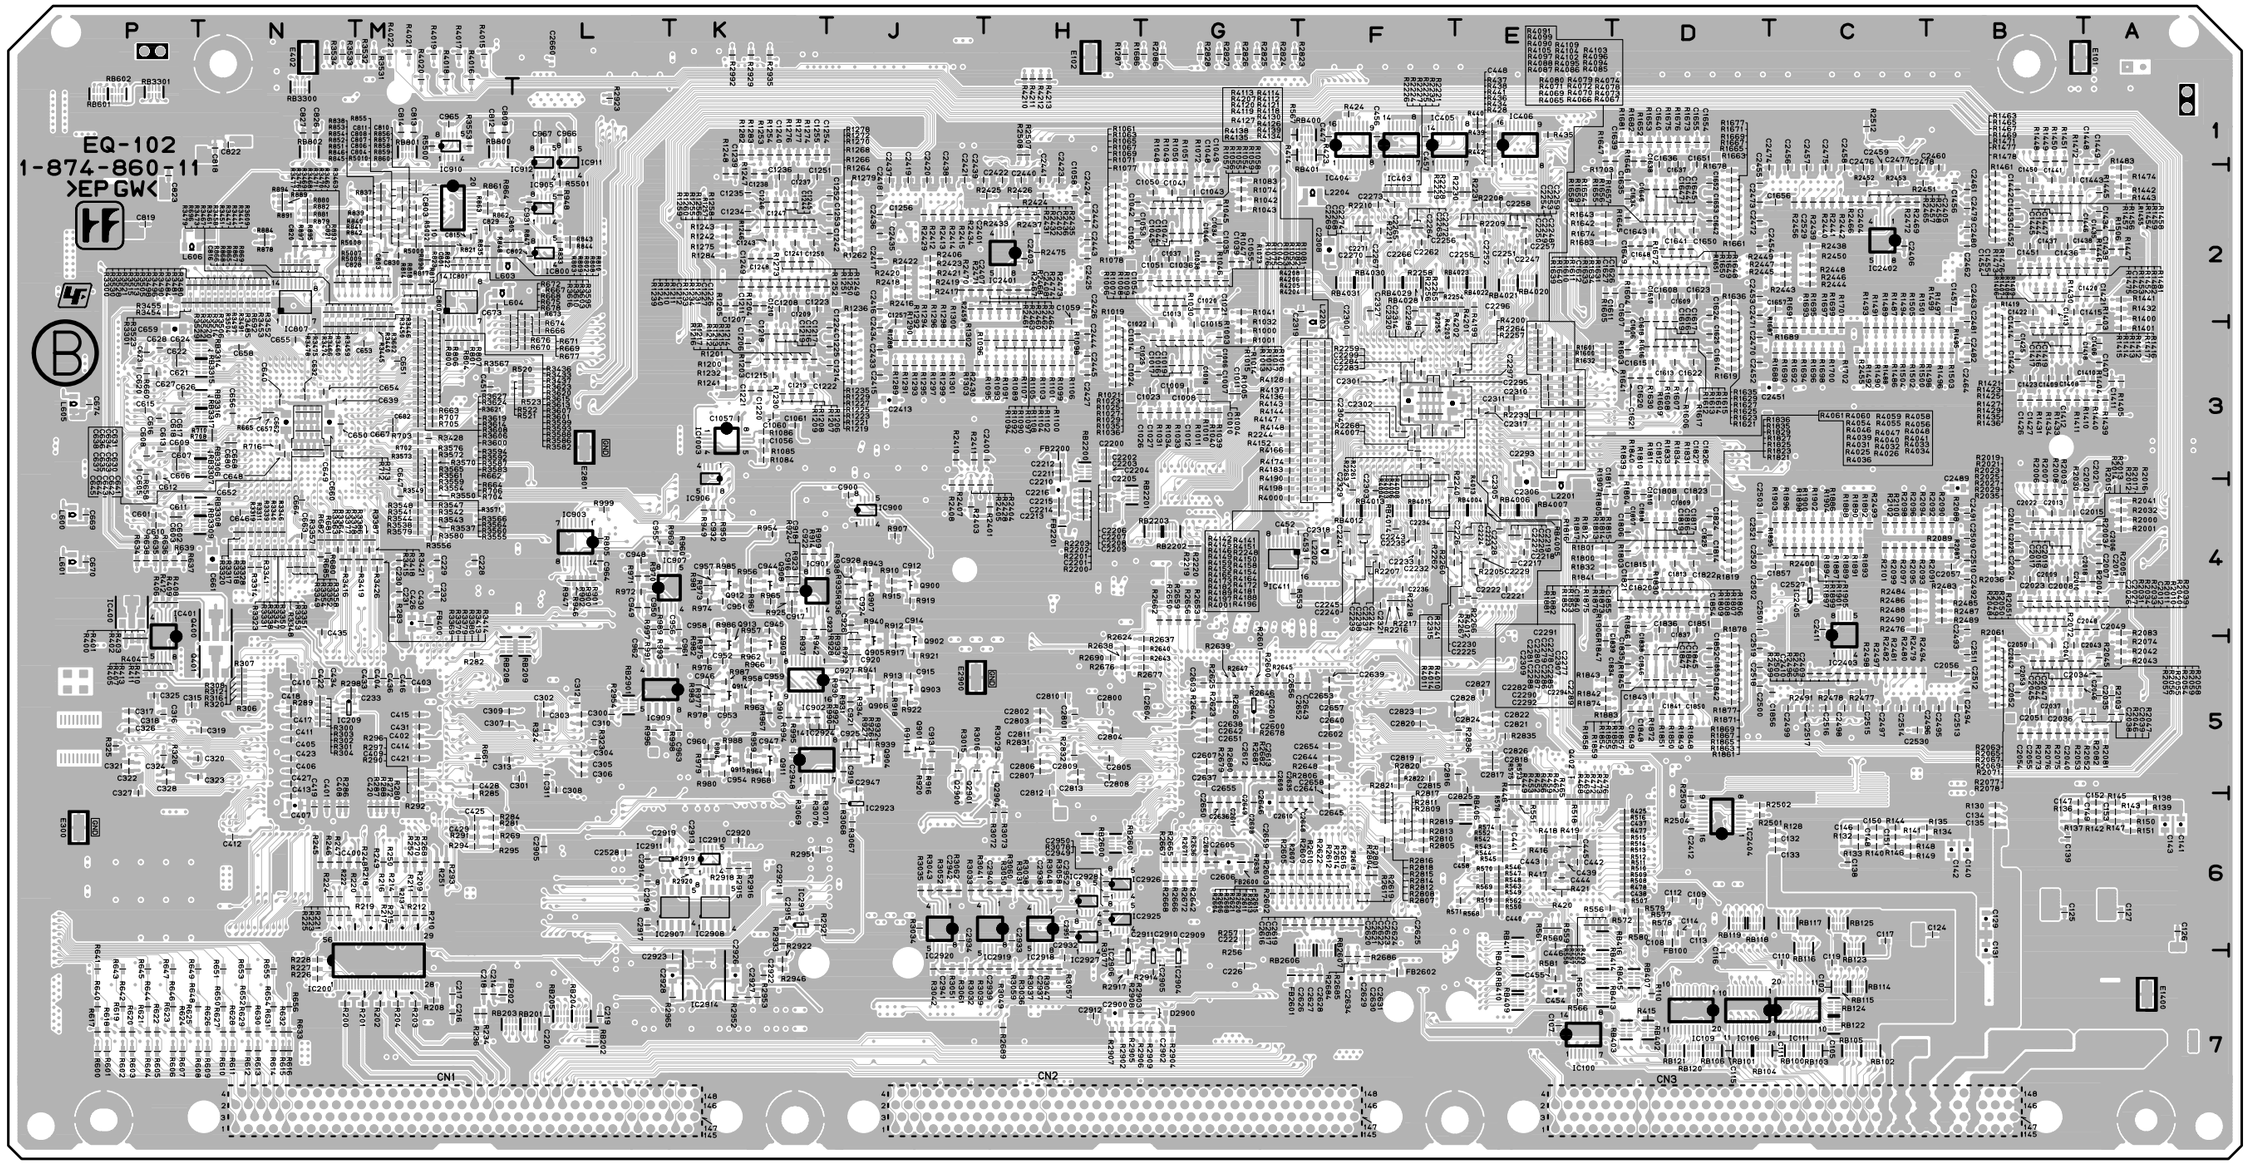

EQ-102 -B SIDE-
SUFFIX: -11

EQ-102 (1-874-860-12)

| | | |

R864	*M2	R982	*K5	R1096	*H3	R1301	*J3	R1604	*D2	R1814	*D4	R2020	B4	R2231	*E2	R2478	*C5	R2675	G6	R2967	K7	R3302	N3	R3416	*N4	R3530	*P2	R4015	*M1	R4129	F3	RB107	C7	RB4027	F2	TP1606	D1
R865	*N2	R983	*K5	R1097	*H3	R1302	*J3	R1605	*E2	R1815	*D4	R2021	*B4	R2232	*F2	R2479	*C5	R2676	*H5	R2968	K7	R3303	P3	R3417	N4	R3531	*M1	R4016	*M1	R4130	*F3	RB108	C7	RB4028	*F2	TP1607	D1
R866	*N2	R984	*K5	R1098	*H3	R1303	*J3	R1606	*D3	R1816	*D4	R2022	B4	R2233	*E3	R2480	*C5	R2677	*G5	R2969	K7	R3304	P3	R3418	*N4	R3532	*M1	R4017	*M1	R4131	F3	RB109	D7	RB4029	*F2	TP1608	E1
R867	*N2	R985	*K4	R1099	*H3	R1400	*A2	R1607	*D3	R1817	*D4	R2023	*B4	R2234	E3	R2481	*C5	R2678	*G5	R2970	K7	R3305	P3	R3419	*M4	R3533	*N1	R4018	*M1	R4132	F3	RB110	D7	RB4030	*F2	TP1609	E1
R868	*N2	R986	*K4	R1100	*H3	R1401	*A3	R1608	*D3	R1818	D4	R2024	B4	R2235	E3	R2482	*C5	R2679	*G5	R2971	K7	R3306	P3	R3420	N4	R3534	*N1	R4019	*M1	R4133	F3	RB111	D7	RB4031	*F2	TP1610	C1
R869	*N2	R987	*K5	R1101	*H3	R1402	A3	R1609	*D3	R1819	*D4	R2025	*B4	R2236	E3	R2483	*B4	R2680	*G5	R2972	K7	R3307	P3	R3421	*M4	R3535	M4	R4020	*M1	R4134	*F3	RB112	C7			TP1611	C1
R870	N2	R988	*K5	R1102	*H3	R1403	*A3	R1610	*D2	R1820	D4	R2026	B4	R2237	E3	R2484	*C4	R2681	*G5	R2973	K7	R3308	P3	R3422	N4	R3536	M4	R4021	*M1	R4135	*F3	RB113	C7	S400	D5	TP1612	C3
R871	N2	R989	*L4	R1103	*H3	R1404	*A3	R1611	*D2	R1821	*D4	R2027	*B4	R2238	E3	R2485	*B4	R2682	*G5	R2974	L6	R3309	N4	R3423	M4	R3537	*M4	R4022	*M1	R4136	*G3	RB114	*C7	S401	A1	TP1613	C3
R872	N2	R990	*K5	R1104	*H3	R1405	*A3	R1612	*D3	R1822	D4	R2028	B4	R2239	F4	R2486	*C4	R2683	F7	R2975	L7	R3310	N4	R3424	M4	R3538	*M4	R4023	E3	R4137	*G3	RB115	*C7	S402	A1	TP1800	D3
R873	N2	R991	*L5	R1105	*H3	R1406	*B2	R1613	*D3	R1823	*D4	R2029	*B4	R2240	*F4	R2487	*B4	R2684	*F7	R2976	L7	R3311	*N4	R3425	M4	R3539	M4	R4024	E3	R4138	*F3	RB116	*C6	S403	F7	TP1801	D4
R874	M2	R992	*K5	R1106	*H3	R1407	*B2	R1614	*D3	R1824	D4	R2030	*B4	R2241	*F4	R2488	*C4	R2685	*F7	R2977	L7	R3312	N4	R3426	*M4	R3540	M4	R4025	*E3	R4139	*F3	RB117	*C6	S601	P1	TP1802	F1
R875	M2	R993	*L5	R1107	*H3	R1408	*B2	R1615	*D3	R1825	*D4	R2031	*B4	R2242	F4	R2489	*B4	R2686	*F7	R2978	L7	R3313	N4	R3427	P3	R3541	*M4	R4026	*E3	R4140	P3	RB118	*D6	S2200	G4	TP1803	D3
R876	M2	R994	*K5	R1108	*H3	R1409	*B2	R1616	*D3	R1826	D4	R2032	*A4	R2243	F4	R2490	*C4	R2689	*H7	R2979	L7	R3314	*N4	R3428	*M3	R3542	*M4	R4027	E4	R4141	*F3	RB119	*D6	S2900	L1	TP1804	D4
R877	M2	R995	*K5	R1200	*K3	R1410	*A3	R1617	*D3	R1827	*D4	R2033	*B4	R2244	*G3	R2491	*C5	R2690	*H5	R2980	K7	R3315	N4	R3429	N4	R3543	*M4	R4028	E4	R4142	*F3	RB120	*D7	S2901	L5	TP1805	D5
R878	*N2	R996	*L5	R1201	*K3	R1411	*B3	R1618	D3	R1828	D4	R2034	*B4	R2245	F3	R2492	C4	R2800	F6	R2981	K7	R3316	N4	R3430	M3	R3544	*M4	R4029	E3	R4143	*G3	RB121	*D7	S3300	P1	TP1806	F1
R879	*N2	R997	*L4	R1202	K3	R1412	*B3	R1619	*D3	R1829	*D4	R2035	*B4	R2246	F3	R2493	*C4	R2801	*F6	R2982	K7	R3317	*N4	R3431	M2	R3545	M4	R4030	E3	R4144	*G3	RB122	*C7	S3301	N1	TP1807	D4
R880	*N2	R998	*L5	R1203	*K3	R1413	*B3	R1620	D3	R1830	*D4	R2036	*B4	R2247	F3	R2494	*C5	R2802	F6	R2983	K7	R3318	*N4	R3432	M3	R3546	M4	R4031	*E3	R4145	*F3	RB123	*C6	S4000	H1	TP2000	B4
R881	*N2	R999	*L4	R1204	*K2	R1414	*B3	R1621	*D3	R1831	*D3	R2037	B4	R2248	*F3	R2495	*C5	R2803	F6	R2984	K7	R3319	*N4	R3433	*M2	R3547	*M4	R4032	*E3	R4146	*F3	RB124	*C7			TP2001	A3
R882	*N2	R1000	*G3	R1205	*K2	R1415	*B3	R1622	D3	R1832	*E4	R2038	B4	R2249	F3	R2496	*C5	R2804	*F6	R2985	K7	R3320	*N4	R3434	M3	R3548	*M4	R4033	*E3	R4147	*G3	RB125	*C6	TP200	M7	TP2002	F1
R883	N2	R1001	*G3	R1206	*K3	R1416	*B3	R1623	*D3	R1833	*D3	R2039	*A4	R2250	F2	R2497	*C5	R2805	*F6	R2986	K7	R3321	N4	R3435	M3	R3549	*M4	R4034	*E3	R4148	*G3	RB200	L7	TP201	L1	TP2003	B4
R884	*N2	R1002	G3	R1207	*K3	R1417	*B3	R1624	D3	R1834	*D3	R2040	*A4	R2251	F2	R2498	*C5	R2806	*F5	R2987	K6	R3322	N4	R3436	*M2	R3550	*M4	R4035	E3	R4149	*F3	RB201	*L7	TP202	M1	TP2004	B5
R885	N2	R1003	*G3	R1208	*K3	R1418	B2	R1625	*D3	R1835	*D4	R2041	*A4	R2253	F2	R2499	*C5	R2807	*F6	R2988	K6	R3323	*N4	R3437	*M3	R3551	M4	R4036	*E3	R4150	*F3	RB202	*L7	TP203	G7	TP2005	A4
R889	*N2	R1004	*G3	R1209	*K3	R1419	*B2	R1626	D3	R1836	*D4	R2042	*A5	R2254	*F2	R2500	*C5	R2808	*F6	R2989	K6	R3324	N4	R3438	M3	R3552	M4	R4037	E3	R4151	*F3	RB203	*M7	TP204	L4	TP2006	F1
R890	N2	R1005	*G3	R1210	*K2	R1420	B2	R1627	*D3	R1837	D4	R2043	*A5	R2255	*F2	R2501	*D6	R2809	*F6	R2990	K6	R3325	N4	R3439	M3	R3553	*M1	R4038	E3	R4152	*G3	RB204	*L7	TP205	L5	TP2007	B5
R891	*N2	R1006	*G2	R1211	*K2	R1421	*B2	R1628	D3	R1838	D4	R2044	A5	R2256	*F2	R2502	*D6	R2810	*F6	R2991	K6	R3326	N4	R3440	*M3	R3554	*M4	R4039	*E3	R4153	*F3	RB205	*L7	TP206	L4	TP2008	E1
R892	N2	R1007	*G2	R1212	*K3	R1422	B3	R1629	*D3	R1839	*D3	R2045	*A5	R2257	*E3	R2503	*D6	R2811	*F6	R2992	*K1	R3327	N4	R3441	*M2	R3555	*M4	R4040	*E3	R4154	*F3	RB206	L7	TP207	L5	TP2009	E1
R893	*N2	R1008	*G2	R1213	*K3	R1423	*B3	R1630	*D3	R1840	*D3	R2046	*A5	R2258	*F2	R2504	*D6	R2812	*F6	R2993	K6	R3328	*N4	R3442	M2	R3556	*M4	R4041	*E3	R4155	G3	RB207	L7	TP208	L5	TP2010	D1
R894	*N2	R1009	*G2	R1214	*K3	R1424	B3	R1631	*D2	R1841	*E4	R2047	*A5	R2259	*F3	R2505	H1	R2813	*F6	R2994	K6	R3329	N4	R3443	M2	R3557	M3	R4042	E3	R4156	F3	RB208	*M5	TP209	L4	TP2011	E1
R895	*N2	R1010	*G3	R1215	*K3	R1425	*B3	R1632	*E3	R1842	*E5	R2048	*B4	R2260	*F4	R2506	H1	R2814	*F6	R2995	K6	R3330	N4	R3444	*M2	R3558	M3	R4043	E3	R4157	F3	RB209	*L5	TP210	L4	TP2012	B3
R896	N2	R1011	*G3	R1216	*K3	R1426	B3	R1633	*D2	R1843	*E5	R2049	*B4	R2261	*F3	R2507	*H1	R2815	*F6	R2996	K6	R3331	*N4	R3445	*M3	R3559	*M4	R4044	E3	R4158	*F3	RB400	*F1	TP211	L4	TP2013	C3
R897	*N2	R1012	*G3	R1217	*K3	R1427	*B3	R1634	*D2	R1844	E5	R2050	*B4	R2262	*F4	R2508	*H1	R2816	*F6	R2997	K6	R3332	N4	R3446	*M3	R3560	*M3	R4045	E3	R4159	*F3	RB401	*F1	TP212	L4	TP2600	L1
R898	*M2	R1013	*G3	R1218	J3	R1428	B3	R1635	*D2	R1845	*D5	R2051	*B4	R2263	*F3	R2509	C1	R2817	*F6	R2998	K6	R3333	N4	R3447	*M2	R3561	*M3	R4046	*E3	R4160	G3	RB402	*D7	TP213	L4	TP2900	L1
R900	*L4	R1014	*G3	R1219	*J3	R1429	*B3	R1636	*D2	R1846	*D4	R2052	*A5	R2264	*E3	R2510	C1	R2818	*F6	R2999	K6	R3334	N4	R3448	M2	R3562	M3	R4047	*E3	R4161	F3	RB403	*D7	TP214	L4		
R901	*L4	R1015	*G3	R1220	J3	R1430	*B2	R1637	D2	R1847	*E5	R2053	*B5	R2265	*F2	R2511	C1	R2819	*F6	R3000	K6	R3335	N4	R3449	M2	R3563	M3	R4048	*E3	R4162	F3	RB404	D5	TP215	L4	X200	M4
R902	*L4	R1016	*G3	R1221	*J3	R1431	*B3	R1638	D2	R1848	*D5	R2054	*B5	R2266	*E4	R2512	*C1	R2820	*F5	R3001	K6	R3336	N4	R3450	*M3	R3564	*M3	R4049	E3	R4163	F3	RB405	F6	TP216	L4	X201	M4
R903	J4	R1017	*G3	R1222	J3	R1432	*A2	R1639	*D2	R1849	*D5	R2055	*B5	R2267	*E4	R2513	C5	R2821	*F5	R3002	K6	R3337	N4	R3451	*M2	R3565	*M3	R4050	E3	R4164	*F3	RB406	*E6	TP600	P7	X202	M4
R904	J4	R1018	H2	R1223	*J3	R1433	*B3	R1640	*D2	R1850	*D5	R2056	*B5	R2268	*F3	R2514	C5	R2822	*F5	R3003	K6	R3338	*N4	R3452	*N2	R3566	*M3	R4051	E3	R4165	*F3	RB407	*D7	TP601	P7	X203	M4
R905	J4	R1019	*H2	R1224	J3	R1434	*B3	R1641	*E3	R1851	*D5	R2057	*B5	R2400	*C4	R2515	C5	R2823	*G1	R3004	K6	R3339	*N4	R3453	*N2	R3567	*M3	R4052	E3	R4166	*G3	RB408	*E7	TP602	L1	X204	M4
R906	J4	R1020	H3	R1225	*J3	R1435	*B3	R1642	*E2	R1852	*D4	R2058	*B5	R2401	*H4	R2516	C5	R2824	*G1	R3005	K6	R3340	*N4	R3454	*P2	R3568	M3	R4053	E3	R4167	G4	RB409	*E7	TP603	P7	X600	P2
R907	*J4	R1021	*H3	R1226	J3	R1436	*B3	R1643	*E2	R1853	*D4	R2059	B5	R2402	L7	R2600	*C5	R2825	*G1	R3006	K6	R3341	*N4	R3455	*P2	R3569	M3	R4054	*E3	R4168	F4	RB410	*E7	TP604	P7	X2900	J6
R908	J3	R1022	H3	R1227	*J3	R1437	B3	R1644	E2	R1854	*D5	R2060	B5	R2403	*J4	R2601	*G5	R2826	*G1	R3007	K6	R3342	N4	R3456	M2	R3570	*M3	R4055	*E3	R4169	F4	RB411	*E6	TP605	P7	*:B SIDE	
R909	*K4	R1023	*H3	R1228	J3	R1438	B3	R1645	*D2	R1855	*D5	R2061	*B5	R2404	*H4	R2602	*G6	R2827	*G1	R3008	K6	R3343	N4	R3457	M2	R3571	*M3	R4056	*E3	R4170	F3	RB412	D7	TP606	P7		
R910	*J4	R1024	H3	R1229	*J3	R1439	*A3	R1646	*D1	R1856	*D5	R2062	B5	R2405	*J4	R2603	*G6	R2828	*G1	R3009	K6	R3344	N4	R3458	*M2	R3572	*M3	R4057	E3	R4171	F3	RB413	*E7	TP607	P7		
R911	*J5	R1025	*H3	R1230	*K3	R1440	*A3	R1647	*E1	R1857	*D5	R2063	*B5	R2406	*J2	R2604	*G6	R2831	*H5	R3010	K6	R3345	N4	R3459	*M3	R3573	*M3	R4058	*E3	R4172	*F3	RB414	*E7	TP608	L1		
R912	*J5	R1026	H3	R1231	*K2	R1441	*A2	R1648	*D2	R1858	*D5	R2064	B5	R2407	*J4	R2605	*G6	R2832	*H5	R3011	K6	R3346	*N4	R3460	*N3	R3574	M3	R4059	*E3	R4173	*F3	RB415	*E7	TP609	P7		
R913	*J5	R1027	*H3	R1232	*K3	R1442	*A2	R1649	*D2	R1859	*D5	R2065	*B5	R2408	*J4	R2606	*G6	R2835	*E5	R3012	K6	R3347	*N4	R3461	*N2	R3575	M3	R4060	*E3	R4174	*G3	RB416	*E6	TP610	N7		
R914	*K4	R1028	H3	R1233	*K2	R1443	*A2	R1650	*D2	R1860	D5	R2066	B5	R2410	*J3	R2607	*G6	R2836	*E5	R3013	K6	R3348	*N4	R3462	*M2	R3576	*M3	R4061	*E3	R4175	G4	RB601	*P1	TP611	N7		
R915	*J4	R1029	*H3	R1234	*K2	R1444	A2	R1651	*D2	R1861	*D5	R2067	*B5	R2411	*J3	R2608	*F6	R2900	H7	R3014	K6	R3349	*N4	R3463	*M2	R3577	M4	R4062	E3	R4176	F4	RB602	*P1	TP612	N7		
R916	*J5	R1030	*G2	R1235	*J3	R1445	*A2	R1652	*D1	R1862	D5	R2068	B5	R2412	*J2	R2609	*F6	R2901	H7	R3015	*J5	R3350	*N4	R3464	N2	R3578	M4	R4063	E3	R4177	F4	RB800	*M1	TP613	N7		
R917	*J5	R1031	*G3	R1236	*J2	R1446	*A2	R1653	*D1	R1863	*D5	R2069	*B5	R2413	*J2	R2610	*F6	R2902	*H7	R3016	*J5	R3351	*N4	R3465	N2	R3579	*M4	R4064	E3	R4178	F4	RB801	*M1	TP614	N7		
R918	*J5	R1032	*G3	R1237	J3	R1447	*A2	R1654	*D2	R1864	D5	R2070	B5	R2414	*J2	R2611	*F6	R2903	*G7	R3017	J5	R3352	*N4	R3466	*N3	R3580	*M4	R4065	*E3	R4179	F3	RB802	*N1	TP615	N7		
R919	*J4	R1033	*G3	R1238	J2	R1448	*B1	R1655	*D2	R1865	*D5	R2071	*B5	R2415	*J2	R2612	*F6	R2904	*G7	R3018	H6	R3353	*N4	R3467	*N2	R3581	M3	R4066	*E3	R4180	F3	RB2200	*H3	TP616	L1		
R920	*J5	R1034	*G3	R1239	*K2	R1449	*B1	R1656	*D2	R1866	D5	R2072	*B4	R2416	*J2	R2613	*F6	R2905	*H7	R3019	H6	R3354	*N4	R3468	*M2	R3582	*M3	R4067	*E3	R4181	*F3	RB2201	*H4	TP617	N6		
R921	*J5	R1035	*H3	R1240	*K2	R1450	*B1	R1657	*D2	R1867	*D5	R2073	*B5	R2417	*J2	R2614	*F6	R2906	*G7	R3020	H6	R3355	N4	R3469	*N2	R3583	*M3	R4068	E3	R4182	*F3	RB2202	*G4	TP618	P6		
R922	*J5	R1036	*H3	R1241	*K3	R1451	*B1	R1658	*D2	R1868	D5	R2074	*A5	R2418	*J2	R2615	*F6	R2907	*H7	R3021	J6	R3356	N4	R3470	*M2	R3584	M3	R4069	*E3	R4183	*G3	RB2203	*G4	TP619	P6		
R923	*K4	R1037	H3	R1242	*K2	R1452	*A2	R1659	*D2	R1869	*D5	R2075	*B5	R2419	*J2	R2616	*F6	R2908	*H7	R3022	H6	R3357	*N4	R3471	*M2	R3585	M3	R4070	*E3	R4184	G4	RB2600	*H6	TP620	P6		
R924	*K4	R1038	H3	R1243	*K2	R1453	*B2	R1660	D2	R1870	D5	R2076	*B5	R2420	*J2	R2617	*F6	R2909	*G7	R3023	H6	R3358	*N4	R3472	N2	R3586	*M3	R4071	*E3	R4185	F4	RB2601	*H6	TP621	P6		
R925	*K4	R1039	*G3	R1244	K2	R1454	*B2	R1661	*D2	R1871	*D5	R2077	*B5	R2421	*J2	R2618	*F6	R2910	H6	R3024	J6	R3359	N4	R3473	*N2	R3587	*M3	R4072	*E3	R4186	F3	RB2602	H7	TP622	P6		
R926	*J5	R1040	*G3	R1245	K2	R1455	*B2	R1662	D2	R1872	*D5	R2078	*B5	R2422	*J2	R2619	*F6	R2911	H6	R3025	J6	R3360	N4	R3474	*N3	R3588	*M3	R4073	*E3	R4187	F3	RB2604	H7	TP623	N6		
R927	*J5	R1041	*G2	R1246	*K2	R1456	*B2	R1663	*D2	R1873	*D4	R2079	B5	R2423	*J2	R2620	*F6	R2912	H6	R3026	J6	R3361	N4	R3475	*N3	R3589	M3	R4074	*E3	R4188	*F4	RB2605	H7	TP624	P6		
R928	*J5	R1042	*G2	R1247	*K2	R1457	*B2	R1664	D2	R1874	*E5	R2080	B5	R2424	*H2	R2621	*F6	R2913	H7	R3027	J6	R3362	N4	R3476	*N2	R3590	M3	R4075	E3	R4189	*F4	RB2606	*F7	TP625	P6		
R929	*J5	R1043	*G2	R1248	*K2	R1458	*B2	R1665	*D2	R1875	*D4	R2081	*A5	R2425	*H2	R2622	*F6	R2914	*G7	R3028	J5	R3363	*N4	R3477	*N2	R3591	M3	R4076	E3	R4190	*G4	RB2607	*F7	TP626	P6		
R930	*J5	R1044	G2	R1249	*K2	R1459	*B2	R1666	D2	R1876	*D4	R2082	*A5	R2426	*H2	R2623	*G5	R2915	*K6	R3029	*H5	R3364	*N4	R3478	*N3	R3592	*M3	R4077	E3	R4191	F4	RB2608	J7	TP627	P6		
R931	*J5	R1045	*G2	R1250	*K2	R1460	B2	R1667	*D2	R1877	*D5	R2083	*A4	R2427	J3	R2624	*H5	R2916	*K6	R3030	J6	R3365	N4	R3479	*N2	R3593	*M3	R4078	*E3	R4192	F4	RB2609	J7	TP628	P6		
R932	*J5	R1046	*G2	R1251	*K2	R1461	*B2	R1668	D2	R1878	*D5	R2084	B4	R2428	*J4	R2625	*G5	R2917	*H7	R3031	*H6	R3366	N4	R3480	*N2	R3594	*M3	R4079	*E3	R4193	F4	RB2610	J7	TP629	N6		
R933	*J5	R1047	*G2	R1252	*K2	R1462	B2	R1669	*D2	R1879	D5	R2085	B4	R2429	*J2	R2626	*G5	R2918	*K6	R3032	*J7	R3367	N4	R3481	*N2	R3595	*M2	R4080	*E3	R4194	F3	RB2611	J7	TP630	P6		
R934	*J5	R1048	*G2	R1253	*K1	R1463	*B2	R1670	D2	R1880	D5	R2086	*G1	R2430	*J3	R2627	H6	R2919	*K6	R3033	*J6	R3368	N4	R3482	N2	R3596	M3	R4081	E3	R4195	F3	RB2612	H7	TP631	P6		
R935	*J4	R1049	*G2	R1254	*K1	R1464	B2	R1671	*D2	R1881	*D4	R2087	*B4	R2431	*H2	R2628	H6	R2920	*K6	R3034	*J6	R3369	*N4	R3483	N2	R3597	M3	R4082	E3	R4196	*F4	RB2900	G7	TP800	M2		
R936	*J4	R1050	*G2	R1255	*K2	R1465	*B2	R1672	*D2	R1882	*D4	R2088	*B4	R2432	*H2	R2629	H6	R2921	*K6	R3035	*J6	R3370	*N4	R3484	*N2	R3598	M3	R4083	E3	R4197	*F4	RB2901	*L5	TP801	M2		
R937	*K4	R1051	*G2	R1256	*K2	R1466	B2	R1673	*D1	R1883	*E5	R2089	*B4	R2433	*H2	R2630	H6	R2922	*K7	R3036	*H7	R3371	M4	R3485	*N2	R3599	*M3	R4084	E3	R4198	*G4	RB3300	*N1	TP802	M2		
R938	*J4	R1052	*G2	R1257	*K2	R1467	*B2	R1674	*E2	R1884	D4	R2090	*B4	R2434	*J2	R2631	H6	R2923	*L1	R3037	*H7	R3372	M4	R3486	N2	R3600	*M3	R4085	*E3	R4199	*E2	RB3301	*P1	TP803	M2		
R939	*J5	R1053	*G2	R1258	*K2	R1468	B2	R1675	*D1	R1885	D4	R2091	*B4	R2435	*H2	R2632	H6	R2924	L6	R3038	*H6	R3373	M4	R3487	N2	R3601	*M3	R4086	*E3	R4200	*E3	RB3302	N3	TP804	N2		
R940	*J4	R1054	*G2	R1259	*K2	R1469	*B2	R1676	*D1	R1886	*C4	R2092	*B4	R2436	*H2	R2633	H6	R2925	L6	R3039	*J7	R3374	M4	R3488	N2	R3602	*M3	R4087	*E3	R4201	*E2	RB3303	N3	TP805	N2		
R941	*J5	R1055	*G2	R1260	*K2	R1470	B2	R1677	*D2	R1887	*C4	R2093	*C4	R2437	*H2	R2634	H6	R2926	L7	R3040	*J6	R3375	N4	R3489	N2	R3603	*M2	R4088	*E3	R4202	*F2	RB3304	N4	TP900	K1		
R942	*K4	R1056	*G2	R1261	J2	R1471	*B2	R1678	*D2	R1888	*C4	R2094	*C4	R2438	*C2	R2635	*G6	R2927	L7	R3041	*J6	R3376	N4	R3490	*N2	R3604	M3	R4089	E3	R4203	*F2	RB3305	N4	TP901	J6		
R943	*J4	R1057	*G2	R1262	*J2	R1472	*B2	R1679	D2	R1889	*C4	R2095	*C4	R2439	*C2	R2636	*G6	R2928	L6	R3042	*J7	R3377	*N4	R3491	*N2	R3605	M3	R4090	*E3	R4204	*F2	RB3306	*N3	TP902	K1		
R944	K5	R1058	*G2	R1263	J2	R1473	*B2	R1680	D2	R1890	*C4	R2096	*C4	R2440	*C2	R2637	*G5	R2929	*K1	R3043	*J6	R3378	*M4	R3492	N2	R3606	*M3	R4091	*E3	R4205	*F2	RB3307	*N3	TP903	K5		
R945	K5	R1059	*G2	R1264	*J2	R1474	*A2	R1681	*D1	R1891	*C4	R2097	*C4	R2441	*C2	R2638	*H5	R2930	K6	R3044	J7	R3379	*M4	R3493	N2	R3607	*M3	R4092	E3	R4206	*F2	RB3308	*N4	TP904	K5		
R946	*L4	R1060	H2	R1265	J2	R1475	*B2	R1682	*D1	R1892	*C4	R2098	*C4	R2442	*C2	R2639	*G5	R2931	L6	R3045	J6	R3380	*M4	R3494	N2	R3608	*M3	R4093	E3	R4207	*F3	RB3309	*N4	TP1000	G3		
R947	*L4	R1061	*H2	R1266	*J2	R1476	*B2	R1683	*E2	R1893	*C4	R2099	*C4	R2443	*C2	R2640	*G5	R2932	L6	R3046	J7	R3381	M3	R3495	N3	R3609	*M2	R4094	*E3	R4208	*F2	RB3310	N3	TP1001	G2		
R948	*L2	R1062	H2	R1267	J2	R1477	*B2	R1684	D2	R1894	*C4	R2100	*C4	R2444	*C2	R2641	H6	R2933	*K6	R3047	*H7	R3382	M3	R3496	*N2	R3610	*M2	R4095	*E3	R4209	F3	RB3311	N3	TP1002	D1		
R949	*K4	R1063	*H2	R1268	*J2	R1478	*B2	R1685	D2	R1895	*C4	R2101	*C4	R2445	*C2	R2642	*G6	R2934	K6	R3048	*H6	R3383	M3	R3497	*N2	R3611	M3	R4096	*E3	R4210	*H1	RB3312	N3	TP1003	G3		
R950	*K4	R1064	H2	R1269	J2	R1479	B2	R1686	*G1	R1896	*C4	R2102	*C4	R2446	*C2	R2643	*G5	R2935	*K1	R3049	*H7	R3384	N4	R3498	*N2	R3612	M3	R4097	*E3	R4211	*H1	RB3313	N3	TP1004	G2		
R951	K4	R1065	*H2	R1270	*J2	R1480	B2	R1687	*C3	R1897	*C4	R2103	*A5	R2447	*C2	R2644	*G5	R2936	K6	R3050	*H6	R3385	N4	R3499	N2	R3613	*M3	R4098	E3	R4212	*H1	RB3314	*N3	TP1005	G1		
R952	K4	R1066	H2	R1271	J2	R1481	*A2	R1688	*C3	R1898	*C4	R2200	*H4	R2448	*C2	R2645	*G5	R2937	K6	R3051	*J7	R3386	*M4	R3500	N2	R3614	*M3	R4099	*E3	R4213	*H1	RB3315	*N3	TP1006	C1		
R953	K4	R1067	*H2	R1272	*J2	R1482	*A2	R1689	*C3	R1899	*C4	R2201	*H4	R2449	*C2	R2646	*G5	R2938	K6	R3052	*J6	R3387	*M4	R3501	N2	R3615	*M3	R4100	E3	R5000	*M2	RB3316	*N3	TP1007	G2		
R954	*K4	R1068	H2	R1273	*K2	R1483	*A2	R1690	*C3	R1900	*C4	R2202	*H4	R2450	*C2	R2647	*G5	R2939	K7	R3053	J6	R3388	M4	R3502	N3	R3616	*M2	R4101	E3	R5001	M2	RB3317	*N3	TP1200	K2		
R955	K3	R1069	*H2	R1274	*K1	R1484	B2	R1691	*C3	R1901	*C4	R2203	*H4	R2451	*C2	R2648	*F5	R2940	K7	R3054	H6	R3389	M4	R3503	N3	R3617	M3	R4102	*E3	R5002	*M2	RB4000	E4	TP1201	K3		
R956	*K4

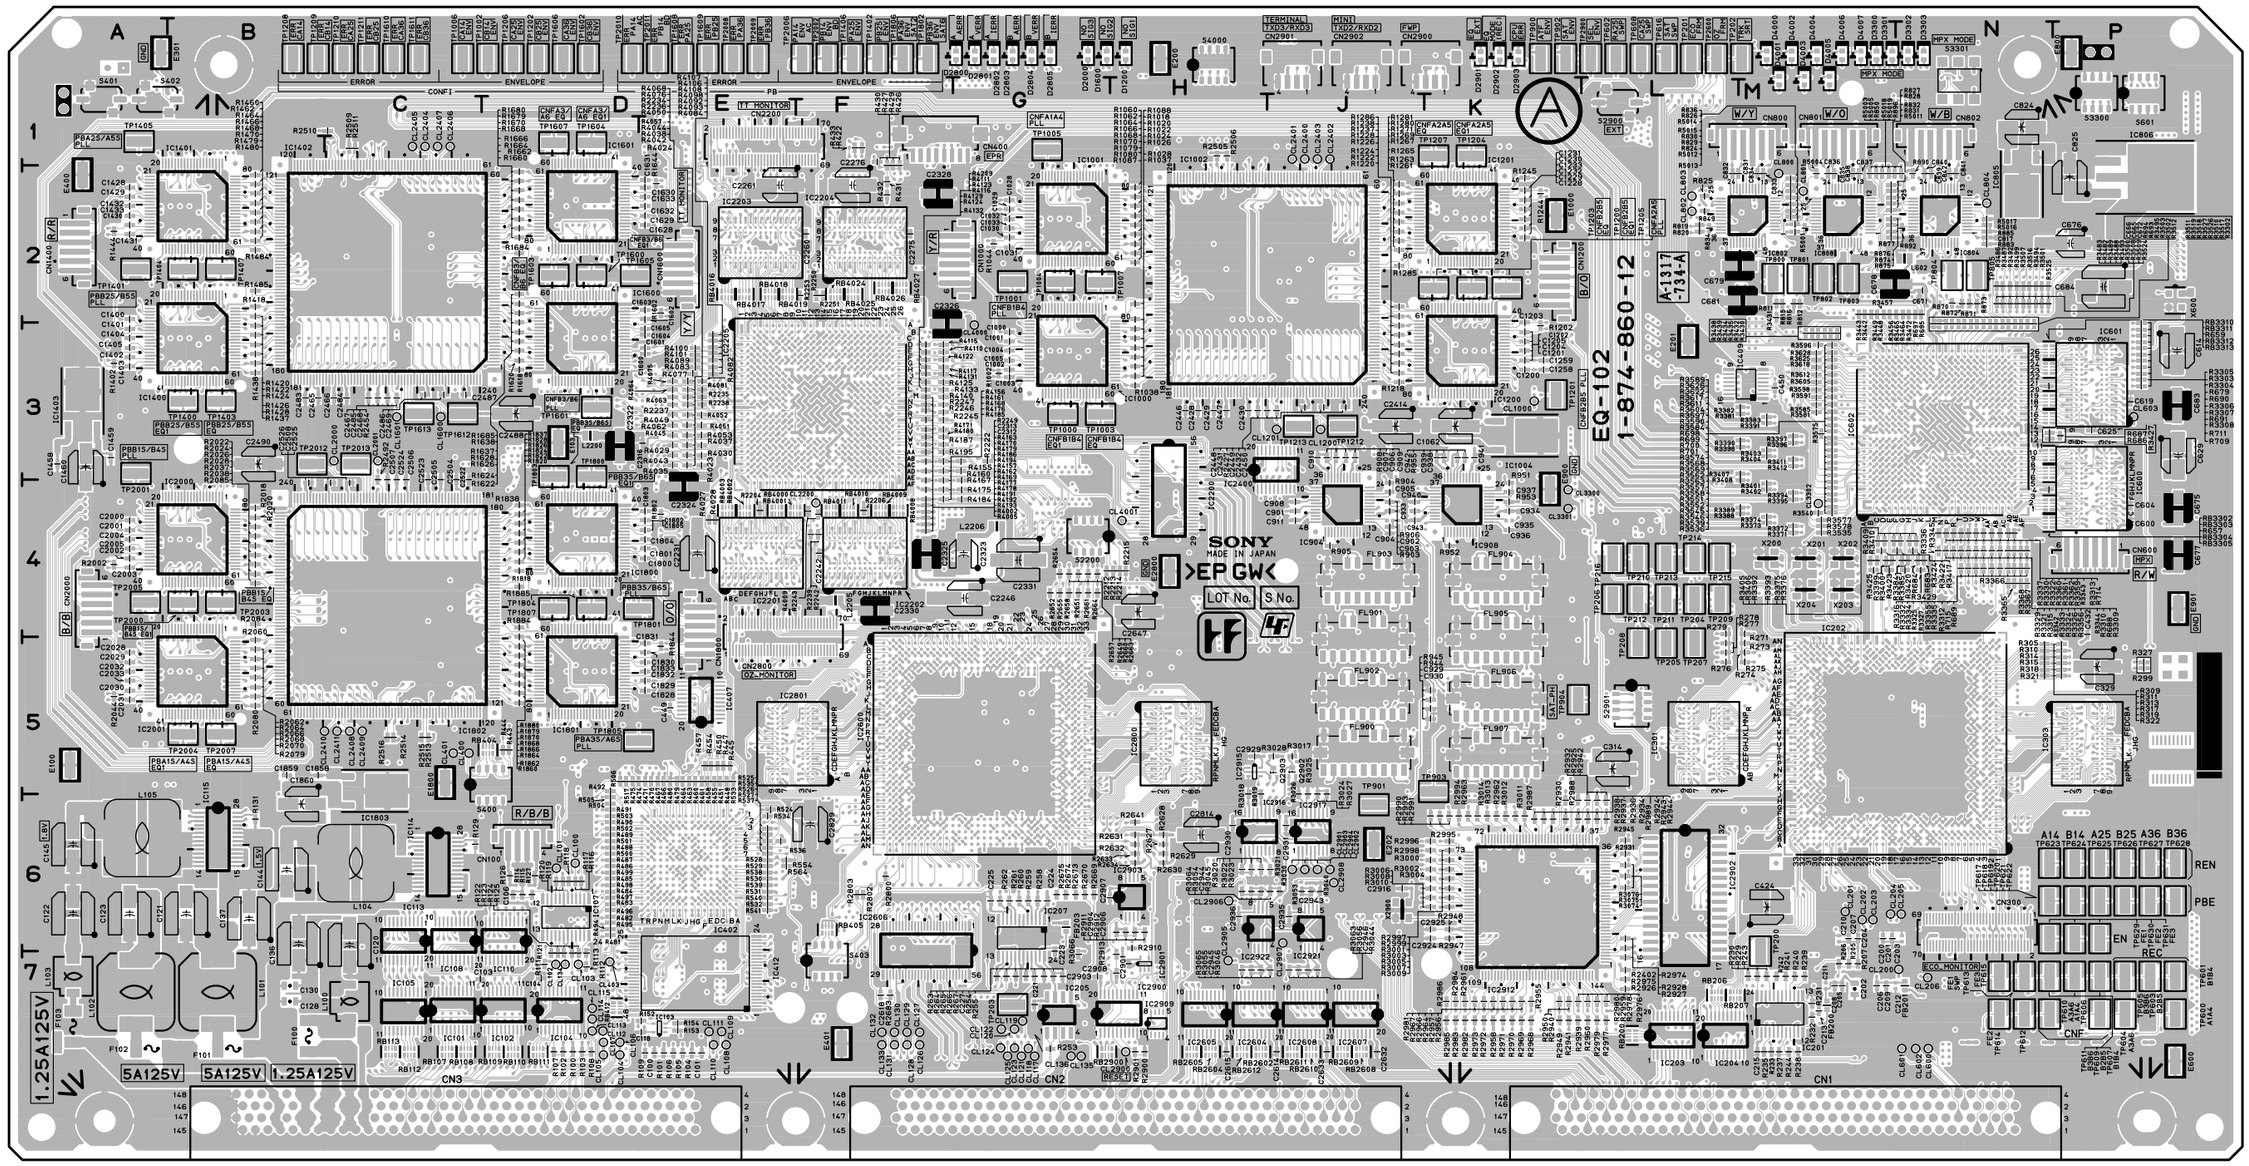

EQ-102 -A SIDE-
SUFFIX: -12

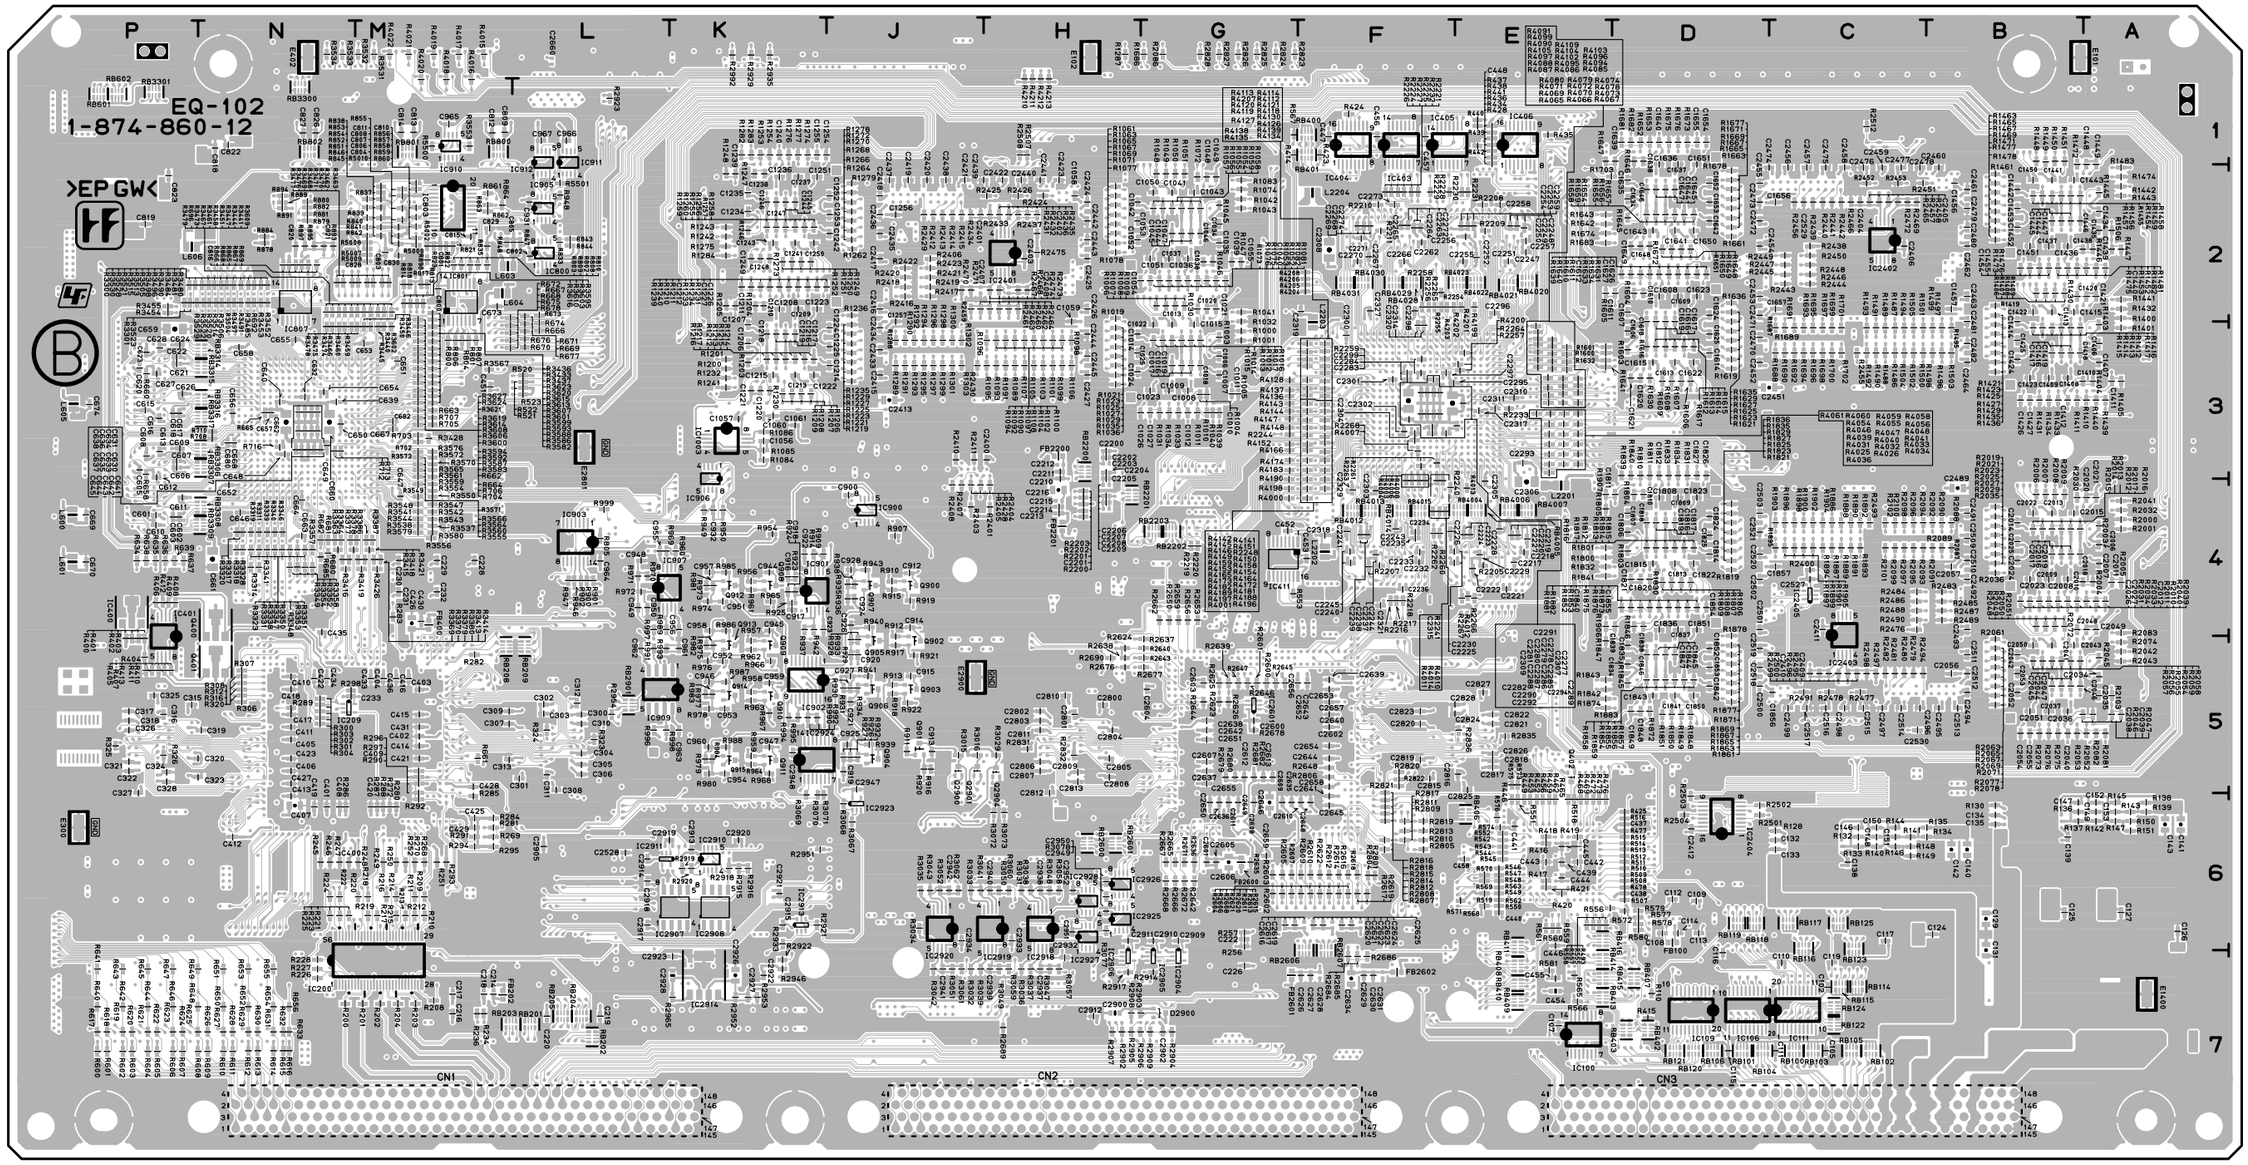

EQ-102 -B SIDE-
SUFFIX: -12

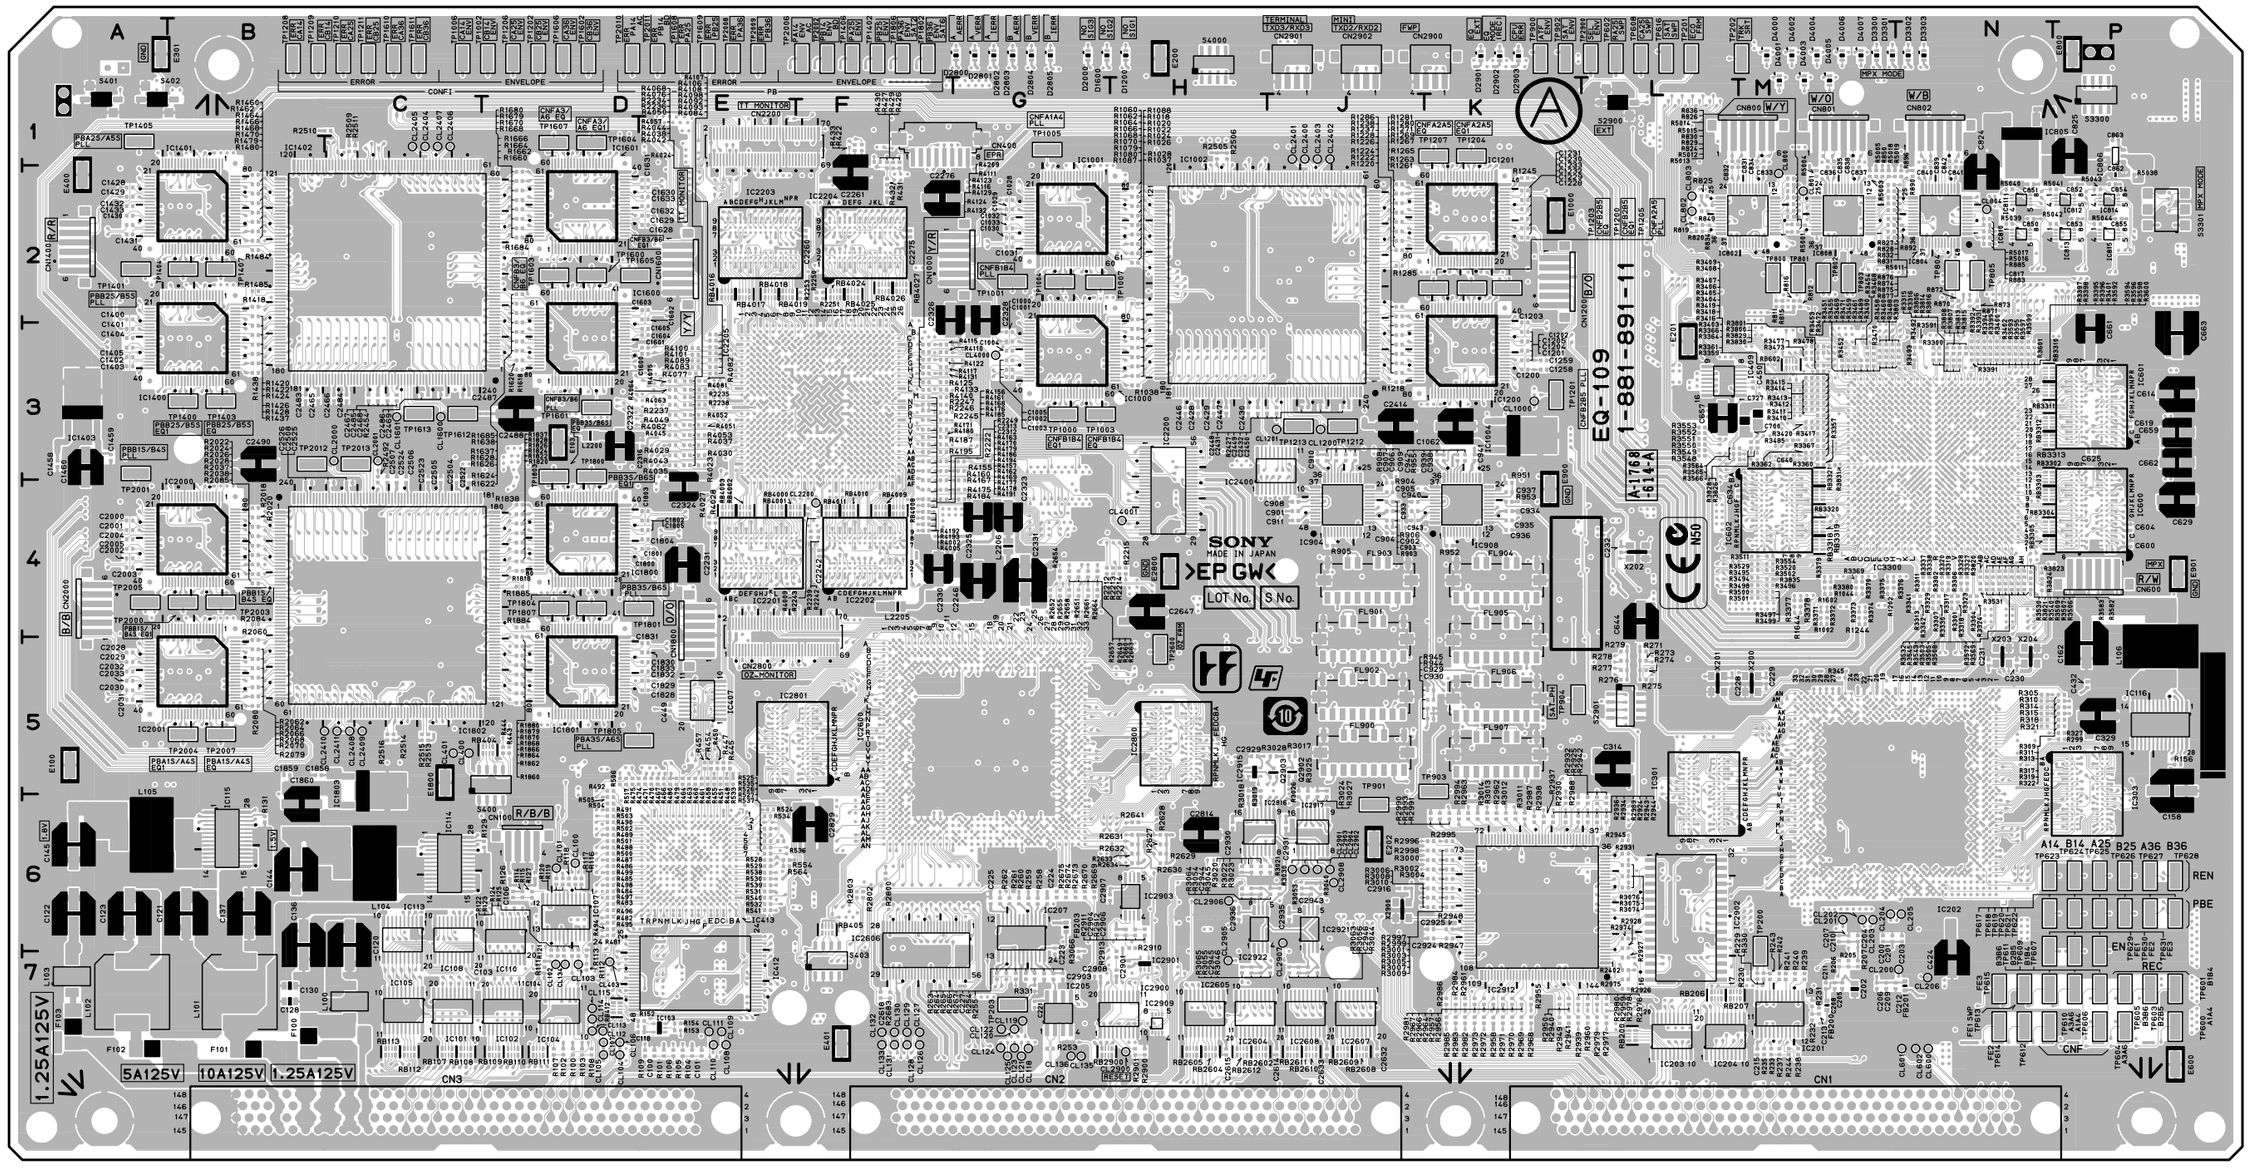

EQ-109 -A SIDE-
SUFFIX: -11

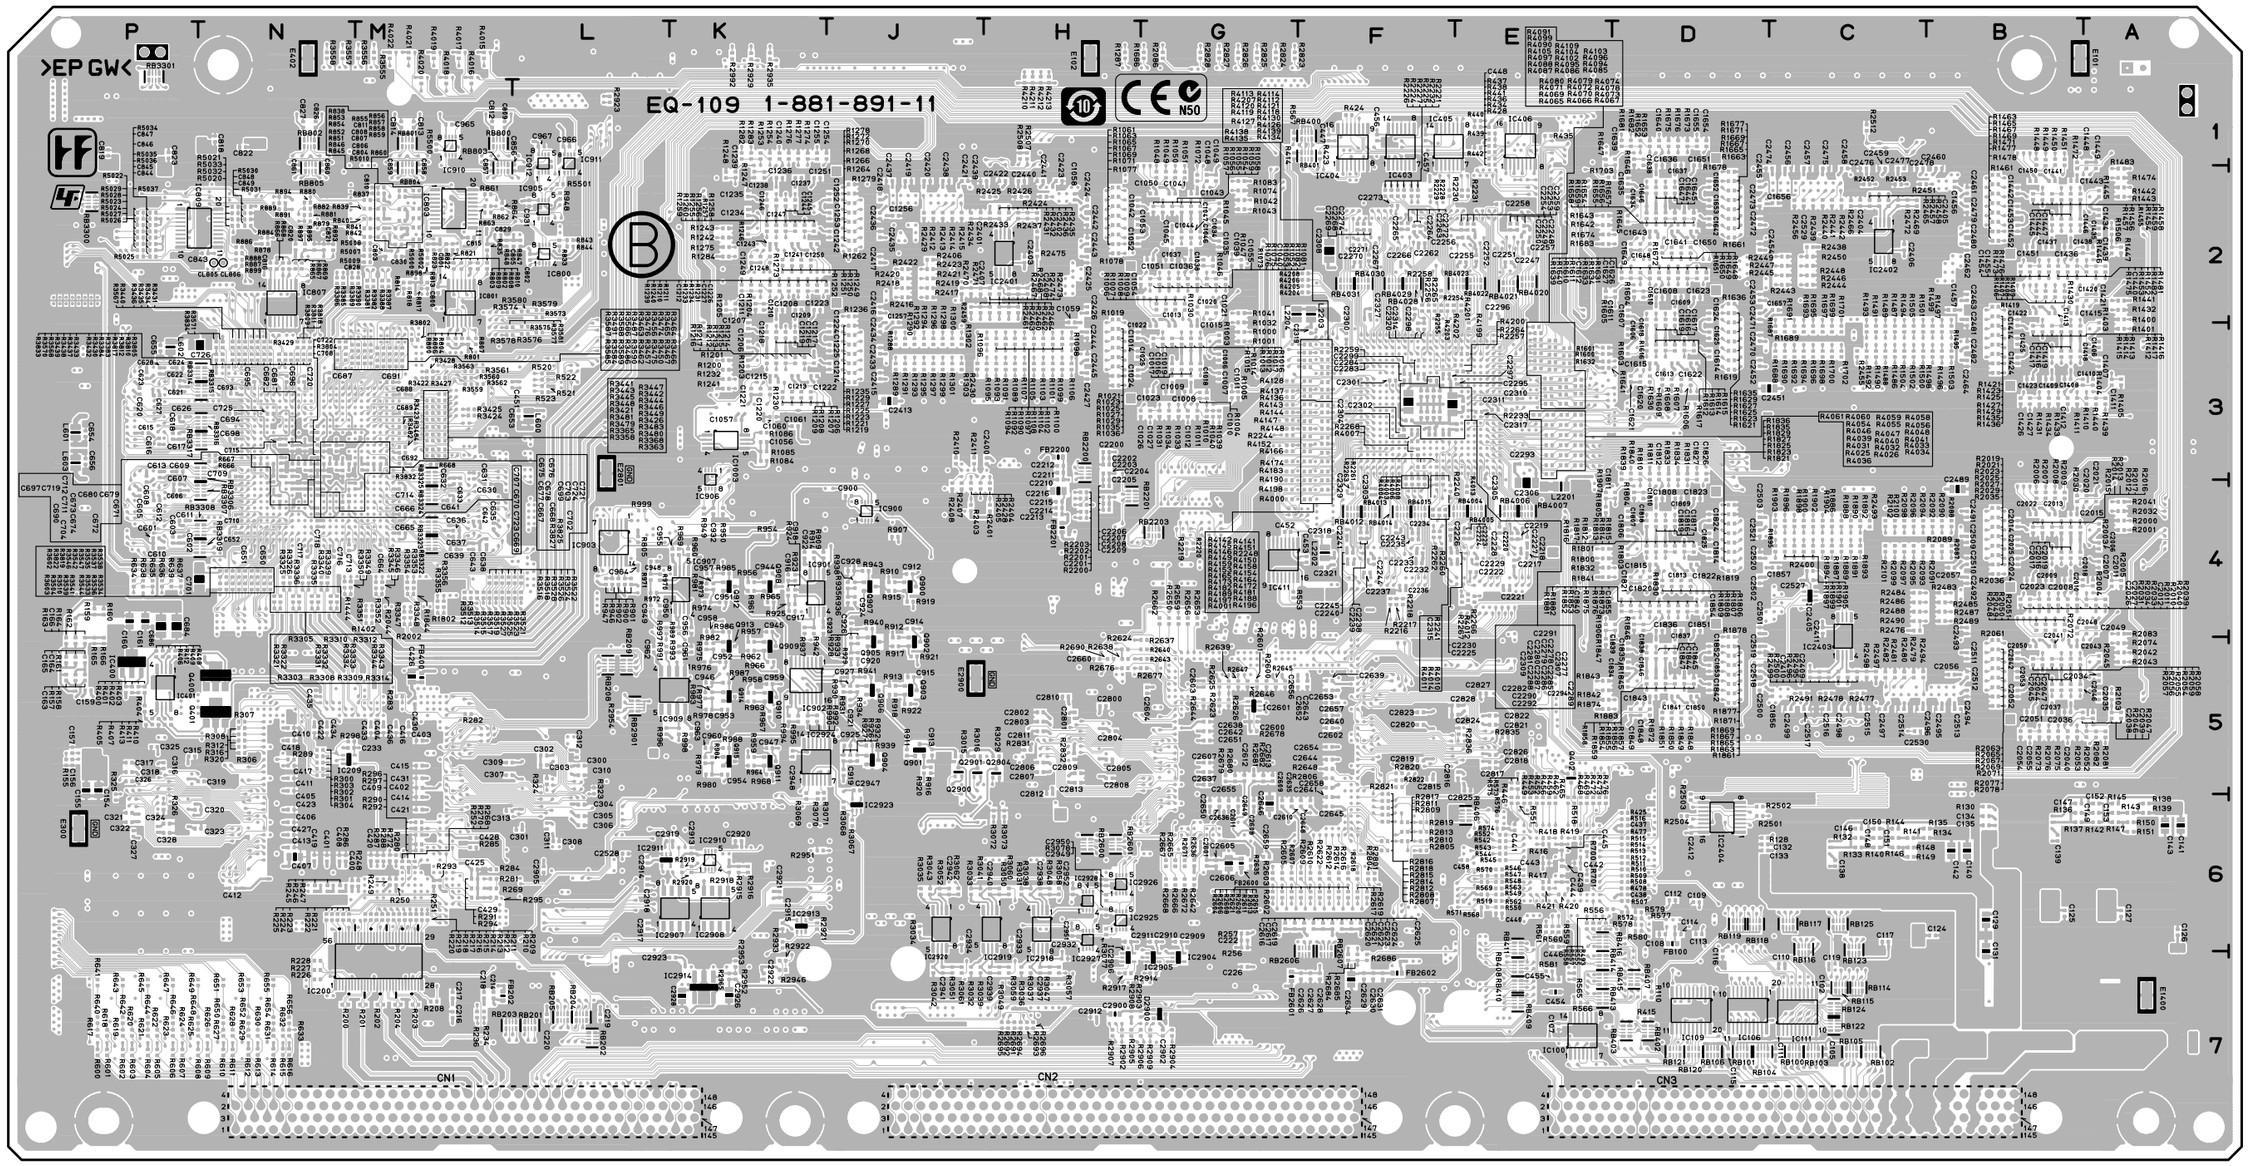

EQ-109 -B SIDE-
SUFFIX: -11

EQ-109 (1-881-891-11)

C100	E7	C232	L4	C608	*P3	C718	*N4	C925	*J5	C1056	*K3	C1432	A2	C1812	*D3	C2050	*B5	C2291	*F3	C2458	*C2	C2626	*F7	C2935	J6	CL2905	H7	FL905	K5	IC2401	*H2	R110	*D7	R242	M7
C101	E7	C233	*N5	C609	*P3	C719	*N3	C926	*J4	C1057	*K3	C1433	A2	C1813	*D4	C2051	*B5	C2292	*F3	C2459	*C2	C2627	*F7	C2936	H6	CL2906	H6	FL906	K5	IC2402	*C2	R111	D7	R243	M7
C102	*C7	C300	*L5	C610	*P4	C720	*N3	C927	*J5	C1058	*H2	C1434	*A2	C1814	*D4	C2052	*B5	C2293	*E3	C2460	*B2	C2628	*F7	C2937	*H7	CL2907	J6	FL907	K5	IC2403	*C4	R112	D7	R244	M7
C103	C7	C301	*L6	C611	*P4	C721	*M3	C928	*J4	C1059	*H3	C1435	*A2	C1815	*D4	C2053	*B5	C2294	*F3	C2461	*B2	C2629	*F7	C2938	*H6	CL2908	J6			IC2404	*D6	R113	D7	R245	*N6
C104	D7	C302	*L5	C612	*P4	C722	*N3	C929	K5	C1060	*K3	C1436	*B2	C1816	*D4	C2054	*B5	C2295	*F3	C2462	*B2	C2630	*F7	C2939	*H7	CL4000	G3	IC100	*E7	IC2405	*C4	R114	D6	R246	*N6
C105	*C7	C303	*L5	C613	*P3	C723	*N4	C930	K5	C1061	*K3	C1437	*B2	C1817	*D4	C2055	*B5	C2296	*E2	C2463	*B2	C2631	*F7	C2940	*H6	CL4001	H4	IC101	C7	IC2600	G5	R115	D6	R247	*N6
C106	D6	C304	*L6	C614	P3	C724	*M3	C931	*L2	C1062	K3	C1438	*B2	C1818	*D4	C2056	*B5	C2297	*F3	C2464	*B3	C2632	J7	C2941	*J7			IC102	D7	IC2601	*G5	R116	D6	R248	*M6
C107	*E7	C305	*L6	C615	*P3	C725	*N3	C932	*K4	C1200	K3	C1439	*A2	C1819	*D4	C2057	*B4	C2298	*F2	C2465	B3	C2633	J7	C2942	*J6	CN1	M7	IC103	E7	IC2604	H7	R117	D6	R249	*M6
C108	*D6	C306	*L6	C616	*P3	C726	*N3	C933	J4	C1201	K3	C1440	*B2	C1820	*D4	C2200	*H3	C2299	*F3	C2466	C3	C2634	*F7	C2943	J6	CN2	H7	IC104	D7	IC2605	H7	R118	D6	R250	*M6
C109	*D6	C307	*M5	C617	*P3	C727	M3	C934	K4	C1202	K3	C1441	*B2	C1821	*D4	C2201	*H4	C2300	*F3	C2467	C3	C2635	*G6	C2944	H6	CN3	C7	IC105	C7	IC2606	F6	R119	D6	R251	*M6
C110	*C7	C308	*L6	C618	*P3	C800	*M2	C935	K4	C1203	K3	C1442	*B2	C1822	*D4	C2202	*H3	C2301	*F3	C2468	C3	C2636	*G6	C2945	H7	CN100	D6	IC106	*D7	IC2607	J7	R120	D6	R252	*M6
C111	*C7	C309	*M5	C619	P3	C801	*M2	C936	K4	C1204	K3	C1443	*B2	C1823	*D4	C2203	*H3	C2302	*F3	C2469	C3	C2637	*G5	C2946	J7	CN400	F1	IC107	D6	IC2608	J7	R121	D7	R253	G7
C112	*D6	C310	*L5	C620	*P3	C802	*L2	C937	K4	C1205	K3	C1444	*B2	C1824	*D4	C2204	*H3	C2303	*F4	C2470	*D3	C2638	*G5	C2947	*J5	CN600	P4	IC108	C6	IC2800	H5	R122	D7	R254	G7
C113	*D6	C311	*L6	C621	*P3	C803	*M2	C938	K3	C1206	*K3	C1445	*B2	C1825	*D4	C2205	*H4	C2304	*F3	C2471	*D2	C2639	*F5	C2948	*K5	CN800	M1	IC109	*D7	IC2801	E5	R123	D7	R255	G7
C114	*D6	C312	*L5	C622	*P3	C804	*M2	C939	K3	C1207	*K3	C1446	*B2	C1826	*D3	C2206	*H4	C2305	*E4	C2472	*D2	C2640	*F5	C2949	*H6	CN801	M1	IC110	D6	IC2900	H7	R124	D7	R256	*G6
C115	*D7	C313	*M6	C623	*P3	C805	*L2	C940	J4	C1208	*K2	C1447	*B2	C1827	*D3	C2207	*H4	C2306	*E4	C2473	*D2	C2641	*F6	C2950	*H6	CN802	N1	IC111	*C7	IC2901	H7	R125	D7	R257	*G6
C116	*D7	C314	L5	C624	*P3	C806	*M2	C941	K3	C1209	*K2	C1448	*A2	C1828	E5	C2208	*H4	C2307	*F3	C2474	*C2	C2642	*G5	C2951	*H6	CN1000	G2	IC113	C6	IC2902	L6	R126	D6	R258	G6
C117	*C6	C315	*P5	C625	P3	C807	*M2	C942	K3	C1210	*K2	C1449	*A2	C1829	E5	C2209	*H4	C2308	*F2	C2475	*C2	C2643	*F5	C2952	*H6	CN1200	K2	IC114	C6	IC2903	H6	R127	D6	R259	G6
C118	E7	C316	*P5	C626	*P3	C808	*M2	C943	J4	C1211	*K2	C1450	*B2	C1830	E5	C2210	*H4	C2309	*F3	C2476	*C2	C2644	*F5			CN1400	A2	IC115	B6	IC2904	*G7	R128	*D6	R260	G6
C119	*C7	C317	*P5	C627	*P3	C809	*M1	C944	*K4	C1212	*K2	C1451	*B2	C1831	E5	C2211	*H3	C2310	*E3	C2477	*C2	C2645	*F6	CL100	D6	CN1600	E2	IC116	P5	IC2905	*G7	R129	D6	R261	G6
C120	C6	C318	*P5	C628	*P3	C810	*M2	C945	*K4	C1213	*K3	C1452	*B2	C1832	E5	C2212	*H3	C2311	*E3	C2478	*C2	C2646	*G6	CL101	D6	CN1800	E4	IC200	*M7	IC2906	*H7	R130	*B6	R262	G6
C121	B6	C319	*N5	C629	P4	C811	*M2	C946	*K5	C1214	*J3	C1453	*B2	C1833	E5	C2213	*H4	C2312	F3	C2479	*B2	C2647	H4	CL102	D7	CN2000	A4	IC201	M7	IC2907	*K6	R131	B6	R263	G7
C122	A6	C320	*N6	C630	*M4	C812	*M1	C947	*K5	C1215	*K3	C1454	*B2	C1834	*D5	C2214	*H4	C2313	F3	C2480	*B2	C2648	*F6	CL103	D7	CN2200	E1	IC202	M6	IC2908	*K6	R132	*C6	R264	G7
C123	A6	C321	*P6	C631	*M3	C813	*M1	C948	*L4	C1216	*K3	C1455	*B2	C1835	*D5	C2215	*H4	C2314	*F3	C2481	*B3	C2649	*G6	CL104	D7	CN2800	E5	IC203	L7	IC2909	H7	R133	*C6	R265	G7
C124	*B6	C322	*P6	C632	*M4	C814	*M1	C949	*L4	C1217	*K3	C1456	*B2	C1836	*D4	C2216	*H4	C2315	*F4	C2482	*B3	C2650	*G6	CL105	D7	CN2900	K1	IC204	L7	IC2910	*K6	R134	*B6	R266	G7
C125	*B6	C323	*N6	C633	*M4	C815	*M2	C950	*L4	C1218	*K3	C1457	*B2	C1837	*D4	C2217	*E4	C2316	E3	C2483	B3	C2651	*G5	CL106	D7	CN2901	J1	IC205	G7	IC2911	*L6	R135	*B6	R267	G7
C126	*A6	C324	*P6	C634	L4	C816	*N2	C951	*K4	C1219	*K3	C1458	A3	C1838	*D4	C2218	*E4	C2317	*E3	C2484	C3	C2652	*F5	CL107	D7	CN2902	J1	IC207	G6	IC2912	K6	R136	*B6	R268	*M6
C127	*A6	C325	*P5	C635	*M4	C817	N2	C952	*K5	C1220	*K3	C1459	A3	C1839	*D4	C2219	*E4	C2318	*F4	C2485	C3	C2653	*F5	CL108	E7			IC209	*N5	IC2913	*K6	R137	*B6	R269	*M6
C128	B7	C326	*P5	C636	*M4	C818	*N1	C953	*K5	C1221	*K3	C1460	A3	C1840	*D4	C2220	*E4	C2319	*F3	C2486	C3	C2654	*F5	CL109	E7	D1200	H1	IC301	L6	IC2914	*K7	R138	*A6	R270	*M6
C129	*B6	C327	*P6	C637	*M4	C819	*P1	C954	*K5	C1222	*K3	C1600	E3	C1841	*D5	C2221	*E4	C2320	*F3	C2487	C3	C2655	*G5	CL110	E7	D1600	G1	IC303	P6	IC2915	H5	R139	*A6	R271	L5
C130	B7	C328	*P6	C638	*M4	C820	*N2	C955	*K4	C1223	*K2	C1601	E3	C1842	*D5	C2222	*E4	C2321	*F4	C2488	D3	C2656	*G5	CL111	E7	D2000	G1	IC400	*P5	IC2916	H6	R140	*C6	R272	*M6
C131	*B7	C329	P5	C639	*M4	C821	*N2	C956	*K4	C1224	*J3	C1602	E2	C1843	*D5	C2223	*E4	C2322	D3	C2489	*B4	C2657	*F5	CL112	D7	D2800	G1	IC401	*P5	IC2917	J6	R141	*C6	R273	L5
C132	*D6	C400	*N6	C640	M3	C822	*N1	C957	*K4	C1225	*J3	C1603	E2	C1844	*D5	C2224	*E4	C2323	G4	C2490	B3	C2658	*F5	CL113	D7	D2801	G1	IC403	*F1	IC2918	*H6	R142	*A6	R274	L5
C133	*D6	C401	*N6	C641	*M4	C823	*P1	C958	*K4	C1226	*J2	C1604	E3	C1845	*D5	C2225	*F4	C2324	E4	C2491	*B4	C2659	*G6	CL114	D7	D2802	G1	IC404	*F1	IC2919	*H6	R143	*A6	R275	L5
C134	*B6	C402	*M5	C642	*M4	C824	N2	C959	*K5	C1227	*K2	C1605	E3	C1846	*D5	C2226	*F4	C2325	G4	C2492	*B4	C2660	*H5	CL115	D7	D2803	G1	IC405	*F1	IC2920	*J6	R144	*C6	R276	L5
C135	*B6	C403	*M5	C643	*M4	C825	P1	C960	*K5	C1228	K2	C1606	*D3	C1847	*D5	C2227	*E4	C2326	F2	C2493	*B4	C2800	*H5	CL118	G7	D2804	G1	IC406	*E1	IC2921	J6	R145	*A6	R277	L5
C136	B6	C404	*M5	C644	L4	C826	*N1	C961	*K5	C1229	K2	C1607	*D2	C1848	*D5	C2228	*E4	C2327	*F2	C2494	*B5	C2801	*H5	CL119	G7	D2805	G1	IC407	E5	IC2922	H6	R146	*C6	R278	L5
C137	B6	C405	*N5	C650	*N4	C827	*N1	C962	*L5	C1230	K2	C1608	*D2	C1849	*D5	C2229	*E4	C2328	G2	C2495	*B5	C2802	*H5	CL120	G7	D2900	*G7	IC409	L3	IC2923	*J6	R147	*A6	R279	L5
C138	*C6	C406	*N6	C651	*N4	C828	*M2	C963	*K5	C1231	K2	C1609	*D2	C1850	*D5	C2230	*F4	C2329	*F4	C2496	*C5	C2803	*H5	CL121	G7	D2901	K1	IC411	*G4	IC2924	*K5	R148	*C6	R280	*M6
C139	*B6	C407	*N6	C652	*N4	C829	*M2	C964	*L4	C1232	K2	C1610	*D2	C1851	*D4	C2231	E4	C2330	F4	C2497	*C5	C2804	*H5	CL122	G7	D2902	K1	IC412	E7	IC2925	*H6	R149	*C6	R281	*M6
C140	*B6	C408	*N6	C653	*L3	C830	*M2	C965	*M1	C1233	K2	C1611	*D2	C1852	*D5	C2232	*F4	C2331	G4	C2498	*C5	C2805	*H5	CL123	G7	D2903	K1	IC413	E6	IC2926	*H6	R150	*A6	R282	*M5
C141	*A6	C409	*M6	C654	*P3	C831	L1	C966	*L1	C1234	*K2	C1612	*D2	C1853	*D5	C2233	*F4	C2400	*H3	C2499	*C5	C2806	*H5	CL124	G7	D3300	M1	IC600	P4	IC2927	*H6	R151	*A6	R283	*M5
C142	*B6	C410	*N5	C655	*P3	C832	L1	C967	*L1	C1235	*K2	C1613	*D3	C1854	*D4	C2234	*F4	C2401	*J2	C2500	*D5	C2807	*H5	CL125	G7	D3301	M1	IC601	P3	IC2928	*H6	R152	E7	R284	*M6
C143	*A6	C411	*N5	C656	*P3	C833	M1	C1000	G3	C1236	*K2	C1614	*D3	C1855	*D4	C2235	*F4	C2402	*H2	C2501	*D4	C2808	*H5	CL126	F7	D3302	N1	IC602	M4	IC3300	N3	R153	E7	R285	*M6
C144	B6	C412	*N6	C657	L3	C834	M1	C1001	G3	C1237	*K2	C1615	*D3	C1856	*C5	C2236	*F4	C2403	*H2	C2502	*D4	C2809	*H5	CL127	F7	D3303	N1	IC800	*L2			R154	E7	R286	*N6
C145	A6	C413	*N6	C659	P3	C835	M1	C1002	G3	C1238	*K2	C1616	*D3	C1857	*C4	C2237	*F4	C2404	*C2	C2503	*D4	C2810	*H5	CL128	F7	D4000	M1	IC801	*M2	L100	C7	R155	*P5	R287	*M6
C146	*C6	C414	*M6	C661	P3	C836	M1	C1003	G3	C1239	*K2	C1617	*D3	C1858	B5	C2238	*F4	C2405	*C2	C2504	C4	C2811	*H5	CL129	F7	D4001	M1	IC802	M2	L101	B7	R156	P5	R288	*M6
C147	*B6	C415	*M5	C662	P3	C837	M1	C1004	G3	C1240	*K1	C1618	*D3	C1859	B5	C2239	*F4	C2406	*C2	C2505	C4	C2812	*H6	CL130	F7	D4002	M1	IC803	*M2	L102	A7	R157	*P5	R289	*N5
C148	*C6	C416	*M5	C663	P3	C838	M1	C1005	G3	C1241	*K2	C1619	*D3	C1860	B6	C2240	*F4	C2407	*J2	C2506	C4	C2813	*H5	CL131	F7	D4003	M1	IC804	N2	L103	A7	R158	*P5	R290	*M6
C149	*A6	C417	*N5	C664	*M4	C839	N1	C1006	*G3	C1242	*J2	C1620	*D3	C2000	A4	C2241	*F4	C2408	*H2	C2507	C4	C2814	H6	CL132	F7	D4004	M1	IC805	N1	L104	C6	R159	*P4	R291	*M6
C150	*C6	C418	*N5	C665	*M4	C840	N1	C1007	*G3	C1243	*K2	C1621	*D3	C2001	A4	C2242	F4	C2409	*C5	C2508	C4	C2815	*F5	CL133	F7	D4005	M1	IC806	P1	L105	A6	R160	*P4	R292	*M6
C151	*C6	C419	*N6	C666	*M4	C841	N1	C1008	*G3	C1244	*K2	C1622	*D3	C2002	A4	C2243	*F4	C2410	*C5	C2509	*B4	C2816	*E5	CL134	D7	D4006	M1	IC807	*N2	L106	P5	R161	*P5	R293	*M6
C152	*A6	C420	*M6	C667	*N3	C842	N1	C1009	*G3	C1245	*K2	C1623	*D2	C2003	A4	C2244	*F4	C2411	*C4	C2510	*B4	C2817	*E5	CL135	G7	D4007	M1	IC808	M2	L600	*L3	R162	*P4	R294	*M6
C153	*A6	C421	*M6	C668	*N3	C843	*N2	C1010	*G3	C1246	*K2	C1624	*D2	C2004	A4	C2245	*F4	C2412	*D6	C2511	*B5	C2818	*E5	CL136	G7			IC809	*N2	L601	*P3	R163	*P5	R295	*M6
C154	*P5	C422	*N5	C669	*N4	C844	*P2	C1011	*G3	C1247	*K2	C1625	*D3	C2005	A4	C2246	G4	C2413	*J3	C2512	*B5	C2819	*F5	CL200	N7	E100	A5	IC810	N2	L602	*P3	R164	*P5	R296	*M6
C155	*P5	C423	*N6	C670	*N4	C845	*P2	C1012	*G3	C1248	*K2	C1626	*D2	C2006	*A4	C2247	*E2	C2414	J3	C2513	*B5	C2820	*F5	CL201	M6	E101	*B1	IC811	N2	L603	*P3	R165	*P5	R297	*M6
C156	*P5	C424	N7	C671	*N3	C846	*P2	C1013	*G3	C1249	*K2	C1627	*D2	C2007	*A4	C2248	*E2	C2415	*J3	C2514	*C5	C2821	*E5	CL202	M6	E102	*H1	IC812	P2	L2200	D3	R166	*P5	R298	*N5
C157	*P5	C425	*M6	C672	*N4	C847	*P2	C1014	*H3	C1250	*K2	C1628	E2	C2008	*B4	C2249	*E2	C2416	*J2	C2515	*C5	C2822	*E5	CL203	M6	E103	D3	IC813	P2	L2201	*E4	R200	*N7	R299	P5
C158	P5	C426	*M5	C673	*N3	C848	*N2	C1015	*G3	C1251	*K2	C1629	E2	C2009	*B4	C2250	*E2	C2417	*J2	C2516	*C5	C2823	*F5	CL204	M6	E200	H1	IC814	P2	L2202	*F4	R201	*M7	R300	*N5
C159	*P5	C427	*N6	C674	*N4	C849	*N2	C1016	*G3	C1252	*J2	C1630	E2	C2010	*B4	C2251	*E2	C2418	*J2	C2517	*C5	C2824	*E5	CL205	N6	E201	L3	IC815	P2	L2203	*F2	R202	*M7	R301	*N5
C160	*P4	C428	*M6	C675	*N3	C850	N2	C1017	*G3	C1253	*J2	C1631	E2	C2011	*A4	C2252	*E2	C2419	*J2	C2518	*D5	C2825	*E5	CL206	N7	E202	J6	IC900	*J4	L2204	*G2	R203	*M7	R302	*N5
C161	*P4	C429	*M6	C676	*N3	C851	N2	C1018	*G3	C1254	*J1	C1632	E2	C2012	*B4	C2253	*E2	C2420	*J2	C2519	*D5	C2826	*E5	CL400	C5	E300	*P6	IC901	*K4	L2205	F4	R204	*M7	R303	*N5
C162	P5	C430	*M5	C677	*N3	C852	P2	C1019	*G3	C1255	*K1	C1633	E2	C2013	*B4	C2254	*E2	C2421	*J2	C2520	*D4	C2827	*E5	CL401	C5	E301	A1	IC902	*K5	L2206	G4	R205	M7	R304	*N5
C163	*P5	C431	*M5	C678	*N3	C853	P2	C1020	*G2	C1256	*J2	C1634	*D2	C2014	*B4	C2255	*E2	C2422	*H2	C2521	*D4	C2828	*E5	CL403	D7	E400	A2	IC903	*L4			R206	M7	R305	N5
C164	*P5	C432	P5	C679	*N3	C854	P2	C1021	*G2	C1257	*J3	C1635	*D2	C2015	*B4	C2256	*E2	C2423	*H2	C2522	C4	C2829	F6	CL600	N7	E401	F7	IC904	J4	Q400	*N5	R207	M7	R306	*N5
C165	*P5	C433	*M5	C680	*N3	C855	P2	C1022	*G3	C1258	K3	C1636	*D2	C2016	*B4	C2257	*E2	C2424	*H2	C2523	C4	C2900	*H7	CL601	N7	E402	*N1	IC905	*L2	Q401	*N5	R208	*M7	R307	*N5
C166	*P5	C434	*N5	C681	*N3	C856	*L2	C1023	*G3	C1259	K3	C1637	*D2	C2017	*B4	C2258	*E2	C2425	*H2	C2524	C4	C2901	H7	CL602	N7	E600	P7	IC906	*K4	Q402	*E5	R209	*M6	R308	*N5
C200	M6	C435	*N5	C682	*N3	C857	*M2	C1024	*H3	C1400	A2	C1638	*D1	C2018	*B4	C2259	*E2	C2426	*H2	C2525	C4	C2902	*G7	CL800	M2	E800	P1	IC907	*K4	Q900	*J4	R210	*M6	R309	P5
C201	M6	C436	*M5	C684	*P4	C858	*M2	C1025	*H3	C1401	A3	C1639	*D1	C2019	*B4	C2260	F2	C2427	*H3	C2526	B4	C2903	G7	CL801	M2	E900	K4	IC908	K4	Q901	*J5	R211	*M6	R310	N5
C202	M7	C437	*D6	C686	*P4	C859	*M2	C1026	*G3	C1402	A3	C1640	*D1	C2020	*A4	C2261	F2	C2428	H3	C2527	*C4	C2904	H6	CL802	L2	E901	P4	IC909	*K5	Q902	*J5	R212	*M6	R311	P5
C203	N6	C438	*D6	C687	*N3	C860	*N2	C1027	*G3	C1403	A3	C1641	*D2	C2021	*A4	C2262	*F2	C2429	H3	C2528	*L6	C2905	*L6	CL803	L2	E1000	K2	IC910	*M1	Q903	*J5	R213	*M6	R312	*N5
C204	M6	C439	*E6	C688	*M3	C861	*N2	C1028	G2	C1404	A3	C1642	*D2	C2022	*B4	C2263	*F2	C2430	H3	C2529	*C2	C2906	H6	CL804	N2	E1400	*A7	IC911	*L1	Q904	*J5	R214	*M6	R313	P5
C205	M7	C440	*E6	C689	*M3	C862	P2	C1029	G2	C1405	A3	C1643	*D2	C2023	*B4	C2264	*F2	C2431	H3	C2530	*C5	C2907	G6	CL805	*N2	E1800	C5	IC912	*L1	Q905	*J5	R215	*M6	R314	N5
C206	M7	C441	*E6	C690	*N3	C863	P1	C1030	G2	C1406	*A3	C1644	*D2	C2024	*B4	C2265	*F2	C2432	J3	C2600	*G5	C2908	H7	CL806	*N2	E2800	H4	IC1000	G3	Q906	*J5	R216	*M6	R315	N5
C207	M6	C442	*E6	C691	*M3	C900	*J4	C1031	G2	C1407	*A3	C1645	*D2	C2025	*B4	C2266	*F2	C2433	*J3	C2601	*G6	C2909	*G6	CL1000	K3	E2801	*L3	IC1001	G2	Q907	*J4	R217	*M6	R316	*N5
C208	M7	C443	*E6	C692	*M3	C901	J4	C1032	G2	C1408	*B3	C1646	*D2	C2026	*B4	C2267	*F2	C2434	*J3	C2602	*F5	C2910	*G6	CL1200	J3	E2900	*J5	IC1002	H2	Q908	*K4	R218	*M6	R317	P5
C209	M7	C444	*E6	C693	*N3	C902	J4	C1033	G2	C1409	*B3	C1647	*D2	C2027	*B4	C2268	*F2	C2435	*J2	C2603	*G5	C2911	*H6	CL1201	J3			IC1003	*K3	Q909	*K5	R219	*M6	R318	N5
C210	M6	C445	*E6	C694	*N3	C903	J4	C1034	*G2	C1410	*B3	C1648	*D2	C2028	A5	C2269	*F2	C2436	*J2	C2604	*G5	C2912	*H7	CL1600	C3	F100	B7	IC1004	K3	Q910	*K5	R220	*M6	R319	P5
C211	M7	C446	*E6	C695	*N3	C904	J4	C1035	*G2	C1411	*A3	C1649	*D2	C2029	A5	C2270	*F2	C2437	*J2	C2605	*G6	C2913	*K6	CL1601	C3	F101	B7	IC1200	K3	Q911	*K5	R221	*N6	R320	*N5
C212	M7	C447	*F1	C696	*N3	C905	J4	C1036	*G2	C1412	*B3	C1650	*D2	C2030	A5	C2271	*F2	C2438	*J2	C2606	*G6	C2914	*L6	CL2000	C3	F102	A7	IC1201	K2	Q912	*K4	R222	*N6	R321	N5
C213	M7	C448	*E1	C697	*N3	C906	J3	C1037	*G2	C1413	*B2	C1651	*D2	C2031	A5	C2272	*F2	C2439	*H2	C2607	*G5	C2915	*K6	CL2001	C3	F103	A7	IC1400	B3	Q913	*K5	R223	*N6	R322	P5
C214	*M7	C449	E5	C698	*N3	C907	J3	C1038	*G2	C1414	*B3	C1652	*D2	C2032	A5	C2273	*F2	C2440	*H2	C2608	*G6	C2916	J6	CL2200	F4			IC1401	B2	Q914	*K5	R224	*N6	R323	*L5
C215	M7	C450	M3	C699	*N3	C908	J4	C1039	*G2	C1415	*B2	C1653	*D2	C2033	A5	C2274	*F2	C2441	*H2	C2609	*G6	C2917	*L6	CL2400	J1	FB100	*D6	IC1402	C2	Q915	*K5	R225	*N6	R324	*L5
C216	*M7	C451	*L3	C700	M3	C909	J3	C1040	*G2	C1416	*B3	C1654	*D1	C2034	*A5	C2275	F2	C2442	*H2	C2610	*F6	C2918	*L6	CL2401	J1	FB200	M7	IC1403	A3	Q2900	*J5	R226	*N7	R325	*P6
C217	*M7	C452	*G4	C701	*N4	C910	J3	C1041	*G2	C1417	*B3	C1655	*D1	C2035	*A5	C2276	F2	C2443	*H2	C2611	*G6	C2919	*K6	CL2402	J1	FB201	N7	IC1600	D3	Q2901	*J5	R227	*N7	R326	*P6
C218	*M7	C453	*F4	C702	*M4	C911	J4	C1042	*H2	C1418	*B3	C1656	*C2	C2036	*B5	C2277	*E3	C2444	*H3	C2612	*G5	C2920	*K6	CL2403	J1	FB202	*M7	IC1601	D2	Q2902	J5	R228	*N7	R327	P5
C219	*L7	C454	*E7	C703	*M3	C912	*J4	C1043	*G2	C1419	*B3	C1657	*C2	C2037	*B5	C2278	*F3	C2445	*H3	C2613	*G5	C2921	*K6	CL2404	C1	FB203	G6	IC1800	D4	Q2903	J5	R229	M7	R330	M7
C220	*L7	C455	*E7	C704	*N4	C913	*J5	C1044	*G2	C1420	*A2	C1800	E4	C2038	*B5	C2279	*F3	C2446	H3	C2614	J7	C2922	*K7	CL2405	C1	FB400	*M5	IC1801	D5	Q2904	*H5	R230	M7	R331	G7
C221	G7	C456	*F1	C707	*N3	C914	*J4	C1045	*G2	C1421	*A2	C1801	E4	C2039	*A5	C2280	*F3	C2447	H3	C2615	H7	C2923	*K7	CL2406	C1	FB2200	*H3	IC1802	C4			R231	M7	R345	M5
C222	*G6	C457	*F1	C708	*N3	C915	*J5	C1046	*G2	C1422	*B2	C1802	E4	C2040	*B5	C2281	*F3	C2448	H3	C2616	*G6	C2924	K6	CL2407	C1	FB2201	*H4	IC1803	C5	R100	D7	R232	M7	R400	*P5
C223	G7	C458	*E6	C709	*N3	C916	*K4	C1047	*G2	C1423	*B3	C1803	E4	C2041	*B5	C2282	*F3	C2449	J3	C2617	*G6	C2925	K6	CL2408	C5	FB2600	*G6	IC2000	B4	R101	E7	R233	M7	R401	*P5
C224	G6	C600	P4	C710	*N4	C917	*K4	C1048	*G2	C1424	*B3	C1804	E4	C2042	*B5	C2283	*F3	C2450	J3	C2618	F7	C2926	*K7	CL2409	C5	FB2601	*G7	IC2001	B5	R102	D7	R234	*M7	R402	*P5
C225	G6	C601	*P4	C711	*N3	C918	*K4	C1049	*G2	C1425	*B3	C1805	E4	C2043	*B5	C2284	*F3	C2451	*C3	C2619	*F6	C2928	*K7	CL2410	B5	FB2602	*F7	IC2200	H4	R103	D7	R235	M7	R403	*P5
C226	*G7	C602	*P4	C712	*N3	C919	*J5	C1050	*G2	C1426	*B3	C1806	*D4	C2044	*B5	C2285	*F3	C2452	*D3	C2620

R410	*P5	R509	*D6	R626	*N7	R863	*M2	R962	*K5	R1061	*H2	R1251	*K2	R1446	*A2	R1638	D2	R1833	*D3	R2024	B4	R2228	*F2	R2460	*H2	R2642	*G6	R2914	*G7	R3013	K6	R3333	*N4	R3432	*N3	R3531	N4
R411	*P5	R510	*D6	R627	*N7	R864	*M2	R963	*K5	R1062	H2	R1252	*K2	R1447	*A2	R1639	*D2	R1834	*D3	R2025	*B4	R2229	*F2	R2461	*J2	R2643	*G5	R2915	*K6	R3014	K6	R3334	*N4	R3433	*N3	R3532	N4
R412	*P5	R511	*D6	R628	*N7	R865	*N2	R964	*K5	R1063	*H2	R1253	*K1	R1448	*B1	R1640	*D2	R1835	*D4	R2026	B4	R2230	*E2	R2462	*H2	R2644	*G5	R2916	*K6	R3015	*J5	R3335	*N4	R3434	*N3	R3533	*N4
R413	*P5	R512	*D6	R629	*N7	R866	*N2	R965	*K4	R1064	H2	R1254	*K1	R1449	*B1	R1641	*E3	R1836	*D4	R2027	*B4	R2231	*E2	R2463	*H2	R2645	*G5	R2917	*H7	R3016	*J5	R3336	*N4	R3435	*N3	R3534	*N4
R414	*G1	R513	*D6	R630	*N7	R867	*N2	R966	*K5	R1065	*H2	R1255	*K2	R1450	*B1	R1642	*E2	R1837	D4	R2028	B4	R2232	*F2	R2464	*H2	R2646	*G5	R2918	*K6	R3017	J5	R3337	N4	R3436	*N3	R3535	*N4
R415	*D7	R514	*D6	R631	*N7	R868	*N2	R967	*K5	R1066	H2	R1256	*K2	R1451	*B1	R1643	*E2	R1838	D4	R2029	*B4	R2233	*E3	R2465	*C2	R2647	*G5	R2919	*K6	R3018	H6	R3338	N4	R3437	*N3	R3536	*N4
R416	*E6	R515	*D6	R632	*N7	R869	*N2	R968	*K5	R1067	*H2	R1257	*K2	R1452	*A2	R1644	M4	R1839	*D3	R2030	*B4	R2234	E3	R2466	*C2	R2648	*F5	R2920	*K6	R3019	H6	R3339	*N4	R3438	*N3	R3537	*N4
R417	*E6	R516	*D6	R633	*N7	R870	N2	R969	*K4	R1068	H2	R1258	*K2	R1453	*B2	R1645	*D2	R1840	*D3	R2031	*B4	R2235	E3	R2467	*H2	R2649	G4	R2921	*K6	R3020	H6	R3340	*N4	R3439	*N3	R3538	*N4
R418	*E6	R517	D5	R634	*P4	R871	N2	R970	*L4	R1069	*H2	R1259	*K2	R1454	*B2	R1646	*D1	R1841	*E4	R2032	*A4	R2236	E3	R2468	*H2	R2650	*G4	R2922	*K7	R3021	J6	R3341	N4	R3440	*N3	R3539	*N4
R419	*E6	R518	*E6	R635	*P4	R872	N2	R971	*L4	R1070	H2	R1260	*K2	R1455	*B2	R1647	*E1	R1842	*E5	R2033	*B4	R2237	E3	R2469	*C2	R2651	G4	R2923	*L1	R3022	H6	R3342	N4	R3441	*M3	R3540	N4
R420	*E6	R519	*E6	R636	*P4	R873	N2	R972	*L4	R1071	*H2	R1261	J2	R1456	*B2	R1648	*D2	R1843	*E5	R2034	*B4	R2238	E3	R2470	*J2	R2652	G4	R2924	L6	R3023	H6	R3343	*N4	R3442	*M3	R3541	*N4
R421	*E6	R520	*L3	R637	*P4	R874	M2	R973	*K4	R1072	*G2	R1262	*J2	R1457	*B2	R1649	*D2	R1844	*M4	R2035	*B4	R2239	F4	R2471	*J2	R2653	*G4	R2925	L6	R3024	J6	R3344	*N4	R3443	*M3	R3542	*N4
R422	F1	R521	*L3	R638	*P4	R875	M2	R974	*K4	R1073	*G2	R1263	J2	R1458	*B2	R1650	*D2	R1845	*D5	R2036	*B4	R2240	*F4	R2472	*C2	R2654	G4	R2926	L7	R3025	J6	R3345	*M4	R3444	*M3	R3543	N4
R423	*F1	R522	*L3	R639	*P4	R876	M2	R975	*K5	R1074	*G2	R1264	*J2	R1459	*B2	R1651	*D2	R1846	*D4	R2037	B4	R2241	*F4	R2473	*H2	R2655	G4	R2927	L7	R3026	J6	R3346	*M4	R3445	*M3	R3544	*N4
R424	*F1	R523	*L3	R640	*P7	R877	M2	R976	*K5	R1075	*G2	R1265	J2	R1460	B2	R1652	*D1	R1847	*E5	R2038	B4	R2242	F4	R2474	*H2	R2656	*G4	R2928	L6	R3027	J6	R3347	*M4	R3446	*M3	R3545	N4
R425	*D6	R524	E6	R641	*P7	R878	*N2	R977	*K5	R1076	*G2	R1266	*J2	R1461	*B2	R1653	*D1	R1848	*D5	R2039	*A4	R2243	F4	R2475	*H2	R2657	G4	R2929	*K1	R3028	J5	R3348	*M4	R3447	*M3	R3546	*N4
R426	F2	R525	E6	R642	*P7	R879	*N2	R978	*K5	R1077	*H2	R1267	J2	R1462	B2	R1654	*D2	R1849	*D5	R2040	*A4	R2244	*G3	R2476	*C4	R2658	G4	R2930	K6	R3029	*H5	R3349	*N4	R3448	*M3	R3547	*N4
R427	F2	R526	E6	R643	*P7	R880	*N2	R979	*K5	R1078	*H2	R1268	*J2	R1463	*B2	R1655	*D2	R1850	*D5	R2041	*A4	R2245	F3	R2477	*C5	R2659	*G4	R2931	L6	R3030	J6	R3350	*N4	R3449	*M3	R3548	L3
R428	*E1	R527	E6	R644	*P7	R881	*N2	R980	*K5	R1079	H2	R1269	J2	R1464	B2	R1656	*D2	R1851	*D5	R2042	*A5	R2246	F3	R2478	*C5	R2660	G4	R2932	L6	R3031	*H6	R3351	*M4	R3450	*M3	R3549	L3
R429	F2	R528	E6	R645	*P7	R882	*N2	R981	*K4	R1080	H2	R1270	*J2	R1465	*B2	R1657	*D2	R1852	*D4	R2043	*A5	R2247	F3	R2479	*C5	R2661	G4	R2933	*K6	R3032	*J7	R3352	*M4	R3451	M3	R3550	L3
R430	F1	R529	E6	R646	*P7	R883	N2	R982	*K5	R1081	*G2	R1271	J2	R1466	B2	R1658	*D2	R1853	*D4	R2044	*M4	R2248	*F3	R2480	*C5	R2662	*G4	R2934	K6	R3033	*J6	R3353	*M4	R3452	M3	R3551	L3
R431	F2	R530	E6	R647	*P7	R884	*N2	R983	*K5	R1082	*G2	R1272	*J2	R1467	*B2	R1659	*D2	R1854	*D5	R2045	*A5	R2249	F3	R2481	*C5	R2663	G4	R2935	*K1	R3034	*J6	R3354	*M4	R3453	M3	R3552	L3
R432	F2	R531	E6	R648	*N7	R885	N2	R984	*K5	R1083	*G2	R1273	*K2	R1468	B2	R1660	D2	R1855	*D5	R2046	*A5	R2250	F2	R2482	*C5	R2664	G4	R2936	K6	R3035	*J6	R3355	*M4	R3454	M3	R3553	L3
R433	F1	R532	E6	R649	*N7	R886	*N2	R985	*K4	R1084	*K3	R1274	*K1	R1469	*B2	R1661	*D2	R1856	*D5	R2047	*A5	R2251	F2	R2483	*B4	R2665	*G6	R2937	K6	R3036	*H7	R3356	*M4	R3455	M3	R3554	M4
R434	*E1	R533	E5	R650	*N7	R887	*N2	R986	*K4	R1085	*K3	R1275	*K2	R1470	B2	R1662	D2	R1857	*D5	R2048	*B4	R2253	F2	R2484	*C4	R2666	*G6	R2938	K6	R3037	*H7	R3357	M3	R3456	*M3	R3555	*M1
R435	*E1	R534	E6	R651	*N7	R888	*N2	R987	*K5	R1086	*K3	R1276	*K1	R1471	*B2	R1663	*D2	R1858	*D5	R2049	*B4	R2254	*F2	R2485	*B4	R2667	*G6	R2939	K7	R3038	*H6	R3358	*M3	R3457	*M3	R3556	*M1
R436	*E1	R535	E6	R652	*N7	R889	*N2	R988	*K5	R1087	H2	R1277	*K1	R1472	*B2	R1664	D2	R1859	*D5	R2050	*B4	R2255	*F2	R2486	*C4	R2668	*G6	R2940	K7	R3039	*J7	R3359	M3	R3458	M3	R3557	*N1
R437	*E1	R536	E6	R653	*N7	R890	N2	R989	*K4	R1088	H2	R1278	*J2	R1473	*B2	R1665	*D2	R1860	D5	R2051	*B4	R2256	*F2	R2487	*B4	R2669	G6	R2941	K7	R3040	J6	R3360	M3	R3459	M3	R3558	*N1
R438	*E1	R537	E6	R654	*N7	R891	*N2	R990	*K5	R1089	*H3	R1279	*J2	R1474	*A2	R1666	D2	R1861	*D5	R2052	*A5	R2257	*E3	R2488	*C4	R2670	G6	R2942	L6	R3041	*J6	R3361	M3	R3460	M3	R3559	*M3
R439	*E1	R538	E6	R655	*N7	R892	N2	R991	*L5	R1090	*H3	R1280	J2	R1475	*B2	R1667	*D2	R1862	D5	R2053	*B5	R2258	*F2	R2489	*B4	R2671	*G6	R2943	L6	R3042	*J7	R3362	M3	R3461	M3	R3560	*M3
R440	*E1	R539	E6	R656	*N7	R893	*N2	R992	*K5	R1091	*H3	R1281	J2	R1476	*B2	R1668	D2	R1863	*D5	R2054	*B5	R2259	*F3	R2490	*C4	R2672	*G6	R2944	L6	R3043	*J6	R3363	*M3	R3462	*M3	R3561	*M3
R441	*E1	R540	E6	R666	*N3	R894	*N2	R993	*K5	R1092	*H3	R1282	*K1	R1477	*B2	R1669	*D2	R1864	D5	R2055	*B5	R2260	*F4	R2491	*C5	R2673	G6	R2945	L6	R3044	J7	R3364	M3	R3463	*M3	R3562	*M3
R442	*E1	R541	E6	R667	*N3	R895	*N2	R994	*K5	R1093	*H3	R1283	*K1	R1478	*B2	R1670	D2	R1865	*D5	R2056	*B5	R2261	*F3	R2492	C4	R2674	G6	R2946	*K7	R3045	J6	R3365	*M3	R3464	*M3	R3563	*M3
R443	D5	R542	*E6	R668	*M3	R896	N2	R995	*K5	R1094	*H3	R1284	*K2	R1479	B2	R1671	*D2	R1866	D5	R2057	*B5	R2262	*F4	R2493	*C4	R2675	G6	R2947	K6	R3046	J7	R3366	M3	R3465	*M3	R3564	L3
R444	D5	R543	*E6	R700	*E6	R897	*N2	R996	*L5	R1095	*H3	R1285	J2	R1480	B2	R1672	*D2	R1867	*D5	R2058	*B5	R2263	*F3	R2494	*C5	R2676	*H5	R2948	K6	R3047	*H7	R3367	M3	R3466	*M3	R3565	L3
R445	E5	R544	*E6	R701	*E6	R898	*M2	R997	*L4	R1096	*H3	R1286	J2	R1481	*A2	R1673	*D1	R1868	D5	R2059	*B5	R2264	*E3	R2495	*C5	R2677	*G5	R2949	K7	R3048	*H6	R3368	*M3	R3467	*M3	R3566	L3
R446	*E6	R545	*E6	R800	*M3	R899	*N2	R998	*K5	R1097	*H3	R1287	*H1	R1482	*A2	R1674	*E2	R1869	*D5	R2060	B5	R2265	*F2	R2496	*C5	R2678	*G5	R2950	K7	R3049	*H7	R3369	M4	R3468	M3	R3567	*N3
R447	E5	R546	*E6	R801	*M3	R900	*L4	R999	*L4	R1098	*H3	R1288	*J3	R1483	*A2	R1675	*D1	R1870	D5	R2061	*B5	R2266	*E4	R2497	*C5	R2679	*G5	R2951	*K6	R3050	*H6	R3370	M4	R3469	M3	R3568	*N3
R448	E5	R547	*E6	R802	*M2	R901	*L4	R1000	*G3	R1099	*H3	R1289	*J3	R1484	B2	R1676	*D1	R1871	*D5	R2062	B5	R2267	*E4	R2498	*C5	R2680	*G5	R2952	*K7	R3051	*J7	R3371	M4	R3470	M3	R3569	N4
R449	*E6	R548	*E6	R803	*M2	R902	*L4	R1001	*G3	R1100	*H3	R1290	*J3	R1485	B2	R1677	*D2	R1872	*D5	R2063	*B5	R2268	*F3	R2499	*C5	R2681	*G5	R2953	*K7	R3052	*J6	R3372	M4	R3471	M3	R3570	*N3
R450	E5	R549	*E6	R804	*M3	R903	J4	R1002	M4	R1101	*H3	R1291	*J3	R1486	*C3	R1678	*D2	R1873	*D4	R2064	B5	R2400	*C4	R2500	*C5	R2682	*G5	R2954	*L5	R3053	J6	R3373	M4	R3472	M3	R3571	*N3
R451	E5	R550	*E6	R805	*L4	R904	J4	R1003	*G3	R1102	*H3	R1292	*J3	R1487	*C3	R1679	D2	R1874	*E5	R2065	*B5	R2401	*H4	R2501	*D6	R2683	F7	R2955	K7	R3054	H6	R3374	M4	R3473	M3	R3572	N4
R452	*E6	R551	*E6	R806	*M3	R905	J4	R1004	*G3	R1103	*H3	R1293	*J3	R1488	*C3	R1680	D2	R1875	*D4	R2066	B5	R2402	L7	R2502	*D6	R2684	*F7	R2956	K7	R3055	H7	R3375	M4	R3474	*M3	R3573	*L2
R453	*E6	R552	*E6	R807	*M3	R906	J4	R1005	*G3	R1104	*H3	R1294	*J3	R1489	*C3	R1681	*D1	R1876	*D4	R2067	*B5	R2403	*J4	R2503	*D6	R2685	*F7	R2957	K7	R3056	J7	R3376	M4	R3475	*M3	R3574	*M2
R454	E5	R553	*G4	R808	*M2	R907	*J4	R1006	*G2	R1105	*H3	R1295	*J3	R1490	*C3	R1682	*D1	R1877	*D5	R2068	B5	R2404	*H4	R2504	*D6	R2686	*F7	R2958	K7	R3057	*H7	R3377	M4	R3476	*M3	R3575	*L3
R455	E5	R554	E6	R809	*M2	R908	J3	R1007	*G2	R1106	*H3	R1296	*J3	R1491	*C3	R1683	*E2	R1878	*D5	R2069	*B5	R2405	*J4	R2505	H1	R2690	*H5	R2959	L7	R3058	*H6	R3378	M4	R3477	M3	R3576	*L3
R456	*E6	R555	*E6	R810	*M2	R909	*K4	R1008	*G2	R1107	*H3	R1297	*J3	R1492	*C3	R1684	D2	R1879	D5	R2070	B5	R2406	*J2	R2506	H1	R2691	*H7	R2960	L7	R3059	*H7	R3379	M4	R3478	M3	R3577	*M3
R457	E5	R556	*E6	R811	M2	R910	*J4	R1009	*G2	R1108	*H3	R1298	*J3	R1493	*C3	R1685	D2	R1880	D5	R2071	*B5	R2407	*J4	R2507	*H1	R2692	*H7	R2961	K7	R3060	*H6	R3380	M4	R3479	*M3	R3578	*M3
R458	E5	R557	*E6	R812	M2	R911	*J5	R1010	*G3	R1200	*K3	R1299	*J3	R1494	*C3	R1686	*G1	R1881	*D4	R2072	*B4	R2408	*J4	R2508	*H1	R2693	*H7	R2962	K6	R3061	*J7	R3381	*M2	R3480	*M3	R3579	*L2
R459	*E6	R558	*E6	R813	*M2	R912	*J5	R1011	*G3	R1201	*K3	R1300	*J3	R1495	*B3	R1687	*C3	R1882	*D4	R2073	*B5	R2410	*J3	R2509	C1	R2694	*H7	R2963	K6	R3062	*J6	R3382	*M2	R3481	*M3	R3580	*L2
R460	E5	R559	*E6	R814	*M2	R913	*J5	R1012	*G3	R1202	M4	R1301	*J3	R1496	*B3	R1688	*C3	R1883	*E5	R2074	*A5	R2411	*J3	R2510	C1	R2695	*H7	R2964	K7	R3063	J7	R3383	*N3	R3482	*M3	R3581	*L3
R461	E5	R560	*E6	R815	M2	R914	*K4	R1013	*G3	R1203	*K3	R1302	*J3	R1497	*B3	R1689	*C3	R1884	D4	R2075	*B5	R2412	*J2	R2511	C1	R2696	*H7	R2965	*K7	R3064	H6	R3384	*N3	R3483	*M3	R3582	N4
R462	*E6	R561	*E6	R816	M2	R915	*J4	R1014	*G3	R1204	*K2	R1303	*J3	R1498	*B3	R1690	*C3	R1885	D4	R2076	*B5	R2413	*J2	R2512	*C1	R2800	F6	R2966	K7	R3065	H7	R3385	*N2	R3484	*M3	R3583	N4
R463	E5	R562	*E6	R817	*M2	R916	*J5	R1015	*G3	R1205	*K2	R1400	*A2	R1499	*B3	R1691	*C3	R1886	*C4	R2077	*B5	R2414	*J2	R2513	C5	R2801	*F6	R2967	K7	R3066	G7	R3386	*N2	R3485	M3	R3584	*N3
R464	E5	R563	*E6	R818	*M2	R917	*J5	R1016	*G3	R1206	*K3	R1401	*A3	R1500	*C3	R1692	*C3	R1887	*C4	R2078	*B5	R2415	*J2	R2514	C5	R2802	F6	R2968	K7	R3067	*J6	R3387	*M2	R3486	*M3	R3585	*N3
R465	*E6	R564	E6	R819	L2	R918	*J5	R1017	*G3	R1207	*K3	R1402	*M4	R1501	*C3	R1693	*C3	R1888	*C4	R2079	B5	R2416	*J2	R2515	C5	R2803	F6	R2969	K7	R3068	*J6	R3388	*M2	R3487	*M3	R3586	*M3
R466	E5	R565	*E7	R820	L2	R919	*J4	R1018	H2	R1208	*K3	R1403	*A3	R1502	*C3	R1694	*C3	R1889	*C4	R2080	B5	R2417	*J2	R2516	C5	R2804	*F6	R2970	K7	R3069	*K6	R3389	*N2	R3488	M3	R3587	*N3
R467	E5	R566	*E7	R821	*M2	R920	*J5	R1019	*H2	R1209	*K3	R1404	*A3	R1503	*B3	R1695	*C3	R1890	*C4	R2081	*A5	R2418	*J2	R2600	*G5	R2805	*F6	R2971	K7	R3070	*K6	R3390	*M2	R3489	M3	R3588	*N3
R468	*E6	R567	*G1	R822	*M2	R921	*J5	R1020	H3	R1210	*K2	R1405	*A3	R1504	*C3	R1696	*C3	R1891	*C4	R2082	*A5	R2419	*J2	R2601	*G5	R2806	*F5	R2972	K7	R3071	*K6	R3391	N3	R3490	N3	R3589	*N3
R469	*E6	R568	*E6	R823	*M2	R922	*J5	R1021	*H3	R1211	*K2	R1406	*B2	R1505	*C3	R1697	*C3	R1892	*C4	R2083	*A4	R2420	*J2	R2602	*G6	R2807	*F6	R2973	K7	R3072	*H6	R3392	N3	R3491	*N3	R3590	*M3
R470	E5	R569	*E6	R824	M2	R923	*K4	R1022	H3	R1212	*K3	R1407	*B2	R1506	*A2	R1698	*C3	R1893	*C4	R2084	B4	R2421	*J2	R2603	*G6	R2808	*F6	R2974	L6	R3073	*H6	R3393	N3	R3492	N3	R3591	N3
R471	E5	R570	*E6	R825	L2	R924	*K4	R1023	*H3	R1213	*K3	R1408	*B2	R1600	*E3	R1699	*C3	R1894	*C4	R2085	B4	R2422	*J2	R2604	*G6	R2809	*F6	R2975	L7	R3074	L6	R3394	N3	R3493	N3	R3592	N3
R472	*E6	R571	*E6	R826	M2	R925	*K4	R1024	H3	R1214	*K3	R1409	*B2	R1601	*E3	R1700	*C3	R1895	*C4	R2086	*G1	R2423	*J2	R2605	*G6	R2810	*F6	R2976	L7	R3075	L6	R3395	N3	R3494	M4	R3593	N3
R473	*E6	R572	*D6	R827	M2	R926	*J5	R1025	*H3	R1215	*K3	R1410	*A3	R1602	M4	R1701	*C3	R1896	*C4	R2087	*B4	R2424	*H2	R2606	*G6	R2811	*F6	R2977	L7	R3076	L6	R3396	N3	R3495	M4	R3594	N3
R474	D5	R573	*E5	R828	M2	R927	*J5	R1026	H3	R1216	*K3	R1411	*B3	R1603	*D3	R1702	*C3	R1897	*C4	R2088	*B4	R2425	*H2	R2607	*G6	R2812	*F6	R2978	L7	R3077	*H6	R3397	N3	R3496	M4	R3595	N3
R475	D5	R574	*E6	R829	M2	R928	*J5	R1027	*H3	R1217	*K3	R1412	*B3	R1604	*D2	R1703	*E2	R1898	*C4	R2089	*B4	R2426	*H2	R2608	*F6	R2813	*F6	R2979	L7	R3078	*H6	R3398	N3	R3497	M4	R3596	N3
R476	*E6	R575	*E5	R830	M2	R929	*J5	R1028	H3	R1218	J3	R1413	*B3	R1605	*E2	R1800	*E4	R1899	*C4	R2090	*B4	R2427	J3	R2609	*F6	R2814	*F6	R2980	K7	R3300	N3	R3399	N3	R3498	M4	R3597	N3
R477	*D6	R576	*E6	R831	M2	R930	*J5	R1029	*H3	R1219	*J3	R1414	*B3	R1606	*D3	R1801	*E4	R1900	*C4	R2091	*B4	R2428	*J4	R2610	*F6	R2815	*F6	R2981	K7	R3301	N4	R3400	N3	R3499	M4	R3598	N3
R478	*D6	R577	*D6	R832	M2	R931	*J5	R1030	*G2	R1220	J3	R1415	*B3	R1607	*D3	R1802	*M4	R1901	*C4	R2092	*B4	R2429	*J2	R2611	*F6	R2816	*F6	R2982	K7	R3302	N4	R3401	N3	R3500	M4	R3599	N3
R479	E5	R578	*D6	R833	*L2	R932	*J5	R1031	*G3	R1221	*J3	R1416	*B3	R1608	*D3	R1803	*D4	R1902	*C4	R2093	*C4	R2430	*J3	R2612	*F6	R2817	*F6	R2983	K7	R3303	*N4	R3402	N3	R3501	M4	R3600	N3
R480	E5	R579	*D6	R834	L2	R933	*J5	R1032	*G3	R1222	J3	R1417	*B3	R1609	*D3	R1804	*D4	R1903	*C4	R2094	*C4	R2431	*H2	R2613	*F6	R2818	*F6	R2984	K7	R3304	N4	R3403	M3	R3502	M4	R3601	N3
R481	D6	R580	*D6	R835	*M2	R934	*J5	R1033	*G3	R1223	*J3	R1418	B2	R1610	*D2	R1805	*E4	R1904	*C4	R2095	*C4	R2432	*H2	R2614	*F6	R2819	*F6	R2985	K7	R3305	*N4	R3404	M3	R3503	N4	R3602	*N4
R482	D6	R581	*E7	R836	M2	R935	*J4	R1034	*G3	R1224	J3	R1419	*B2	R1611	*D2	R1806	*D4	R1905	*C4	R2096	*C4	R2433	*H2	R2615	*F6	R2820	*F5	R2986	K7	R3306	N4	R3405	M3	R3504	*N4	R3603	*N4
R483	D6	R600	*P7	R837	*M2	R936	*J4	R1035	*H3	R1225	*J3	R1420	B2	R1612	*D3	R1807	*D4	R1906	*E4	R2097	*C4	R2434	*J2	R2616	*F6	R2821	*F5	R2987	K6	R3307	N4	R3406	M3	R3505	N4	R3800	M3
R484	D6	R601	*P7	R838	*M2	R937	*K4	R1036	*H3	R1226	J3	R1421	*B2	R1613	*D3	R1808	*D4	R1907	*E4	R2098	*C4	R2435	*H2	R2617	*F6	R2822	*F5	R2988	K6	R3308	*N4	R3407	M3	R3506	N4	R3801	M3
R485	D6	R602	*P7	R839	*M2	R938	*J4	R1037	H3	R1227	*J3	R1422	B3	R1614	*D3	R1809	*D4	R2000	*A4	R2099	*C4	R2436	*H2	R2618	*F6	R2823	*G1	R2989	K6	R3309	*N4	R3408	M3	R3507	N4	R3802	*M3
R486	D6	R603	*P7	R840	*M2	R939	*J5	R1038	H3	R1228	J3	R1423	*B3	R1615	*D3	R1810	*D3	R2001	*A4	R2100	*C4	R2437	*H2	R2619	*F6	R2824	*G1	R2990	K6	R3310	*N4	R3409	M3	R3508	N4	R3803	N3
R487	D6	R604	*P7	R841	*M2	R940	*J4	R1039	*G3	R1229	*J3	R1424	B3	R1616	*D3	R1811	*D3	R2002	*M4	R2101	*C4	R2438	*C2	R2620	*F6	R2825	*G1	R2991	K6	R3311	N4	R3410	M3	R3509	N4	R3804	*N3
R488	D6	R605	*P7	R842	*M2	R941	*J5	R1040	*G3	R1230	*K3	R1425	*B3	R1617	*D3	R1812	*D4	R2003	*A4	R2102	*C4	R2439	*C2	R2621	*F6	R2826	*G1	R2992	*K1	R3312	*N4	R3411	M3	R3510	*N4	R3805	*N3
R489	D6	R606	*P7	R843	*L2	R942	*K4	R1041	*G2	R1231	*K2	R1426	B3	R1618	D3	R1813	*D4	R2004	*A4	R2103	*A5	R2440	*C2	R2622	*F6	R2827	*G1	R2993	K6	R3313	N4	R3412	M3	R3511	M4	R3806	N3
R490	D6	R607	*P7	R844	*L2	R943	*J4	R1042	*G2	R1232	*K3	R1427	*B3	R1619	*D3	R1814	*D4	R2005	*A4	R2200	*H4	R2441	*C2	R2623	*G5	R2828	*G1	R2994	K6	R3314	*N4	R3413	M3	R3512	*M4	R3807	N3
R491	D6	R608	*N7	R845	*M2	R944	K5	R1043	*G2	R1233	*K2	R1428	B3	R1620	D3	R1815	*D4	R2006	*B4	R2201	*H4	R2442	*C2	R2624	*H5	R2831	*H5	R2995	K6	R3315	N3	R3414	M3	R3513	*M4	R3808	N3
R492	D5	R609	*N7	R846	*M2	R945	K5	R1044	M4	R1234	*K2	R1429	*B3	R1621	*D3	R1816	*D4	R2007	*B4	R2202	*H4	R2443	*C2	R2625	*G5	R2832	*H5	R2996	K6	R3316	N3	R3415	M3	R3514	*M4	R3809	*N3
R493	*E6	R610	*N7	R847	*L2	R946	*L4	R1045	*G2	R1235	*J3	R1430	*B2	R1622	D3	R1817	*D4	R2008	*B4	R2203	*H4	R2444	*C2	R2626	*G5	R2835	*E5	R2997	K6	R3317	N4	R3416	M3	R3515	*M4	R3810	*N3
R494	D6	R611	*N7	R848	*M2	R947	*L4	R1046	*G2	R1236	*J2	R1431	*B3	R1623	*D3	R1818	D4	R2009	*B4	R2212	G4	R2445	*C2	R2627	H6	R2836	*E5	R2998	K6	R3318	N4	R3417	M3	R3516	*M4	R3811	*N3
R495	D6	R612	*N7	R849	L2	R948	*L2	R1047	*G2	R1237	J3	R1432	*A2	R1624	D3	R1819	*D4	R2010	*A4	R2213	H4	R2446	*C2	R2628	H6	R2900	H7	R2999	K6	R3319	N4	R3418	M3	R3517	*M4	R3812	*N3
R496	D6	R613	*N7	R850	M2	R949	*K4	R1048	*G2	R1238	J2	R1433	*B3	R1625	*D3	R1820	D4	R2011	*B4	R2214	H4	R2447	*C2	R2629	H6	R2901	H7	R3000	K6	R3320	N4	R3419	M3	R3518	*M4	R3813	N3
R497	D6	R614	*N7	R851	*M2	R950	*K4	R1049	*G2

R3826	M3	R4089	E3	R4188	*F4	RB200	L7	RB4022	*E2	TP1601	D3
R3827	*N4	R4090	*E3	R4189	*F4	RB201	*L7	RB4023	*E2	TP1602	D1
R3828	M3	R4091	*E3	R4190	*G4	RB202	*L7	RB4024	F2	TP1603	D2
R3829	M3	R4092	E3	R4191	F4	RB203	*M7	RB4025	F2	TP1604	D1
R3830	M3	R4093	E3	R4192	F4	RB204	*L7	RB4026	F2	TP1605	D2
R3831	M3	R4094	*E3	R4193	F4	RB205	*L7	RB4027	F2	TP1606	D1
R3832	*M3	R4095	*E3	R4194	F3	RB206	L7	RB4028	*F2	TP1607	D1
R3833	*N3	R4096	*E3	R4195	F3	RB207	L7	RB4029	*F2	TP1608	E1
R3834	*N3	R4097	*E3	R4196	*F4	RB208	*L5	RB4030	*F2	TP1609	E1
R3835	M4	R4098	E3	R4197	*F4	RB209	*L5	RB4031	*F2	TP1610	C1
R4000	*G4	R4099	*E3	R4198	*G4	RB400	*F1			TP1611	C1
R4001	*F4	R4100	E3	R4199	*E3	RB401	*F1	S400	D5	TP1612	C3
R4002	F4	R4101	E3	R4200	*E3	RB402	*D7	S401	A1	TP1613	C3
R4003	*F4	R4102	*E3	R4201	*E2	RB403	*D7	S402	A1	TP1800	D3
R4004	*F4	R4103	*E3	R4202	*F2	RB404	D5	S403	F7	TP1801	D4
R4005	F4	R4104	*E3	R4203	*F2	RB405	F6	S2900	L1	TP1802	F1
R4006	*F4	R4105	*E3	R4204	*F2	RB406	*E6	S2901	L5	TP1803	D3
R4007	*F3	R4106	E3	R4205	*F2	RB407	*D7	S3300	P1	TP1804	D4
R4008	*F4	R4107	E3	R4206	*F2	RB408	*E7	S3301	P2	TP1805	D5
R4009	F4	R4108	E3	R4207	*F3	RB409	*E7	S4000	H1	TP1806	F1
R4010	*F4	R4109	*E3	R4208	*F2	RB410	*E7			TP1807	D4
R4011	*F4	R4110	F3	R4209	F3	RB411	*E6	TP200	M7	TP2000	B4
R4012	*E4	R4111	F3	R4210	*H1	RB412	D7	TP201	L1	TP2001	A3
R4013	*E4	R4112	*F3	R4211	*H1	RB413	*E7	TP202	M1	TP2002	F1
R4014	*F4	R4113	*F3	R4212	*H1	RB414	*E7	TP203	G7	TP2003	B4
R4015	*M1	R4114	*F3	R4213	*H1	RB415	*E7	TP600	P7	TP2004	B5
R4016	*M1	R4115	F3	R5000	*M2	RB416	*E6	TP601	P7	TP2005	A4
R4017	*M1	R4116	F3	R5001	M2	RB602	M3	TP602	L1	TP2006	F1
R4018	*M1	R4117	F3	R5002	*M2	RB800	*M1	TP603	P7	TP2007	B5
R4019	*M1	R4118	*F3	R5003	M2	RB801	*M1	TP604	P7	TP2008	E1
R4020	*M1	R4119	*F3	R5004	M2	RB802	*N1	TP605	P7	TP2009	E1
R4021	*M1	R4120	*F3	R5005	M2	RB803	*M2	TP606	P7	TP2010	D1
R4022	*M1	R4121	*F3	R5007	*M2	RB804	*M2	TP607	P7	TP2011	E1
R4023	E3	R4122	F3	R5008	*M2	RB805	*N2	TP608	L1	TP2012	B3
R4024	E3	R4123	F3	R5009	*M2	RB2200	*H3	TP609	P7	TP2013	C3
R4025	*E3	R4124	F3	R5010	*M2	RB2201	*H4	TP610	N7	TP2600	H5
R4026	*E3	R4125	F3	R5011	M2	RB2203	*G4	TP611	N7	TP2900	L1
R4027	E4	R4126	*F3	R5012	M2	RB2600	*H6	TP612	N7		
R4028	E4	R4127	*F3	R5013	M2	RB2601	*H6	TP613	N7	X200	M5
R4029	E3	R4128	*G3	R5014	M2	RB2602	H7	TP614	N7	X201	L5
R4030	E3	R4129	F3	R5015	M2	RB2604	H7	TP615	N7	X202	L4
R4031	*E3	R4130	*F3	R5016	N2	RB2605	H7	TP616	L1	X203	N5
R4032	*E3	R4131	F3	R5017	N2	RB2606	*F7	TP617	N6	X204	N5
R4033	*E3	R4132	F3	R5018	M2	RB2607	*F7	TP618	P6	X2900	J6
R4034	*E3	R4133	F3	R5019	M2	RB2608	J7	TP619	P6		
R4035	E3	R4134	*F3	R5020	*N2	RB2609	J7	TP620	P6	*:B SIDE	
R4036	*E3	R4135	*F3	R5021	*N2	RB2610	J7	TP621	P6		
R4037	E3	R4136	*G3	R5022	*P2	RB2611	J7	TP622	P6		
R4038	E3	R4137	*G3	R5023	*P2	RB2612	H7	TP623	N6		
R4039	*E3	R4138	*F3	R5024	*P2	RB2900	G7	TP624	P6		
R4040	*E3	R4139	*F3	R5025	*P2	RB2901	*L5	TP625	P6		
R4041	*E3	R4140	F3	R5026	*P2	RB3300	*P2	TP626	P6		
R4042	E3	R4141	*F3	R5027	*P2	RB3301	*P1	TP627	P6		
R4043	E3	R4142	*F3	R5028	*P2	RB3302	N3	TP628	P6		
R4044	E3	R4143	*G3	R5029	*P2	RB3303	N4	TP629	N7		
R4045	E3	R4144	*G3	R5030	*N2	RB3304	N4	TP630	P7		
R4046	*E3	R4145	*F3	R5031	*N2	RB3305	N4	TP631	P7		
R4047	*E3	R4146	*F3	R5032	*N2	RB3306	*N3	TP800	M2		
R4048	*E3	R4147	*G3	R5033	*N2	RB3307	*N4	TP801	M2		
R4049	E3	R4148	*G3	R5034	*P2	RB3308	*N4	TP802	M2		
R4050	E3	R4149	*F3	R5035	*P2	RB3309	*N4	TP803	M2		
R4051	E3	R4150	*F3	R5036	*P2	RB3310	N3	TP804	N2		
R4052	E3	R4151	*F3	R5037	*P2	RB3311	N3	TP805	N2		
R4053	E3	R4152	*G3	R5038	P2	RB3312	N3	TP900	K1		
R4054	*E3	R4153	*F3	R5039	N2	RB3313	N3	TP901	J6		
R4055	*E3	R4154	*F3	R5040	N2	RB3314	*N3	TP902	K1		
R4056	*E3	R4155	G3	R5041	P2	RB3315	*N3	TP903	K5		
R4057	E3	R4156	F3	R5042	P2	RB3316	*N3	TP904	K5		
R4058	*E3	R4157	F3	R5043	P2	RB3317	*N3	TP1000	G3		
R4059	*E3	R4158	*F3	R5044	P2	RB3318	M4	TP1001	G2		
R4060	*E3	R4159	*F3	R5500	*M1	RB3319	M4	TP1002	D1		
R4061	*E3	R4160	G3	R5501	*L2	RB3320	M4	TP1003	G3		
R4062	E3	R4161	F3			RB3321	M3	TP1004	G2		
R4063	E3	R4162	F3	RB100	*C7	RB3322	*M4	TP1005	G1		
R4064	E3	R4163	F3	RB101	*D7	RB3323	*M4	TP1006	C1		
R4065	*E3	R4164	*F3	RB102	*C7	RB3324	*M4	TP1007	G2		
R4066	*E3	R4165	*F3	RB103	*C7	RB3325	*M3	TP1200	K2		
R4067	*E3	R4166	*G3	RB104	*D7	RB4000	E4	TP1201	K3		
R4068	E3	R4167	G4	RB105	*C7	RB4001	E4	TP1202	D1		
R4069	*E3	R4168	F4	RB106	*D7	RB4002	E4	TP1203	K2		
R4070	*E3	R4169	F4	RB107	C7	RB4003	E4	TP1204	K1		
R4071	*E3	R4170	F3	RB108	C7	RB4004	*E4	TP1205	K2		
R4072	*E3	R4171	F3	RB109	D7	RB4005	*E4	TP1206	D1		
R4073	*E3	R4172	*F3	RB110	D7	RB4006	*E4	TP1207	K1		
R4074	*E3	R4173	*F3	RB111	D7	RB4007	*E4	TP1208	B1		
R4075	E3	R4174	*G3	RB112	C7	RB4008	F4	TP1209	B1		
R4076	E3	R4175	G4	RB113	C7	RB4009	F4	TP1210	C1		
R4077	E3	R4176	F4	RB114	*C7	RB4010	F4	TP1211	C1		
R4078	*E3	R4177	F4	RB115	*C7	RB4011	F4	TP1212	J3		
R4079	*E3	R4178	F4	RB116	*C6	RB4012	*F4	TP1213	J3		
R4080	*E3	R4179	F3	RB117	*C6	RB4013	*F4	TP1400	B3		
R4081	E3	R4180	F3	RB118	*D6	RB4014	*F4	TP1401	A2		
R4082	E3	R4181	*F3	RB119	*D6	RB4015	*F4	TP1402	F1		
R4083	E3	R4182	*F3	RB120	*D7	RB4016	E2	TP1403	B3		
R4084	E3	R4183	*G3	RB121	*D7	RB4017	E2	TP1404	B2		
R4085	*E3	R4184	G4	RB122	*C7	RB4018	E2	TP1405	A1		
R4086	*E3	R4185	F4	RB123	*C6	RB4019	E2	TP1406	F1		
R4087	*E3	R4186	F3	RB124	*C7	RB4020	*E2	TP1407	B2		
R4088	*E3	R4187	F3	RB125	*C6	RB4021	*E2	TP1600	D2		

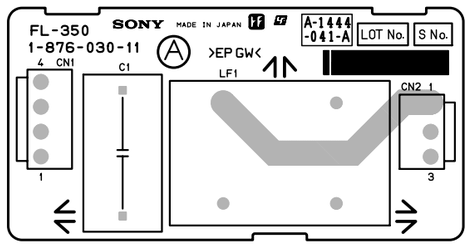

FL-350 -A SIDE-
SUFFIX: -11

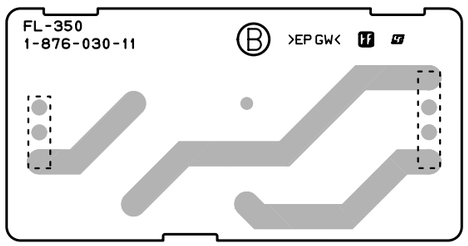

FL-350 -B SIDE-
SUFFIX: -11

FP-155 (1-874-867-11)

C100	A4	IC119	B4	RB130	A4
C101	B3	IC120	B4	RB131	B4
C102	A3	IC121	A4	RB132	B4
C103	A3	IC122	A3	RB133	A4
C104	C3	IC123	A4	RB134	A4
C105	C3	IC124	B4	RB135	A3
C106	A3	IC200	B3		
C107	A3	IC201	B3	VDR301	C1
C108	C3	IC301	A1		
C112	C4	IC302	A3	X1	A3
C113	C4	IC303	A3	X101	C3
C114	B4	IC304	A3		
C115	B4	IC305	A3		
C116	C4				
C117	C4	L301	A2		
C118	C4				
C122	B3	Q100	C3		
C123	C4	Q101	C3		
C124	B4	Q102	B3		
C125	A4				
C126	A4	R100	C3		
C127	A4	R101	C3		
C128	A4	R103	B3		
C129	B4	R106	A3		
C130	B4	R107	A3		
C131	A4	R108	A3		
C132	C3	R110	C3		
C133	A4	R115	C3		
C134	A4	R116	C3		
C135	B4	R121	A3		
C200	B3	R124	C4		
C201	B3	R125	A3		
C202	B3	R129	C3		
C203	B3	R130	C3		
C204	B3	R133	A3		
C205	B3	R134	B3		
C206	B3	R135	B3		
C301	A2	R202	A3		
C302	A1	R301	A2		
C303	A1	R302	A1		
C304	A2	R303	A1		
C305	A1	R304	A1		
C306	A2	R305	A1		
C307	A3	R308	A1		
C308	A3	R310	C1		
C309	A3	R311	C1		
C310	A3	R312	A2		
C311	A1	R313	A2		
		R314	A3		
CL100	B3	R315	A2		
CL101	C3	R316	A3		
CL102	B3	R317	A3		
CL103	C3	R318	A3		
CL104	C3	R319	A3		
CL301	C1	R320	A2		
CL302	C1	R321	A3		
CL303	C1	R322	A1		
		R323	A1		
CN2	A1	R324	A1		
CN3	A2	R325	A1		
CN51	B3	R326	A3		
CN100	B4				
		RB100	B4		
D301	C1	RB101	B4		
D302	C1	RB102	B4		
		RB103	B4		
F301	A1	RB104	A4		
F302	A1	RB105	A4		
		RB106	A4		
FB100	C3	RB107	A4		
FB301	A2	RB108	A4		
FB302	C1	RB109	A4		
FB303	C1	RB110	B4		
FB304	C1	RB111	B4		
FB305	A1	RB112	B4		
FB308	A3	RB113	B4		
		RB114	A4		
IC100	C3	RB115	A4		
IC101	A3	RB116	B4		
IC102	A3	RB117	B4		
IC103	B4	RB118	B4		
IC104	A3	RB119	A4		
IC106	C3	RB120	A4		
IC108	C4	RB121	A4		
IC110	C3	RB122	B4		
IC112	B3	RB123	A4		
IC113	C4	RB124	B4		
IC114	B4	RB125	A4		
IC115	A4	RB126	A3		
IC116	A4	RB127	B4		
IC117	A4	RB128	A4		
IC118	A4	RB129	A4		

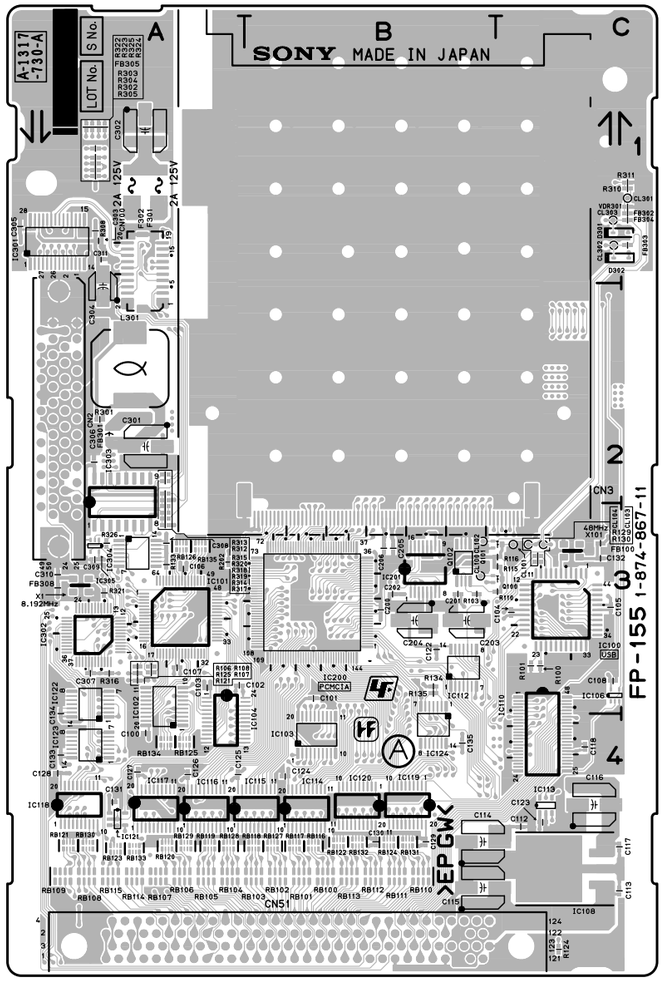

FP-155 -A SIDE-
SUFFIX: -11

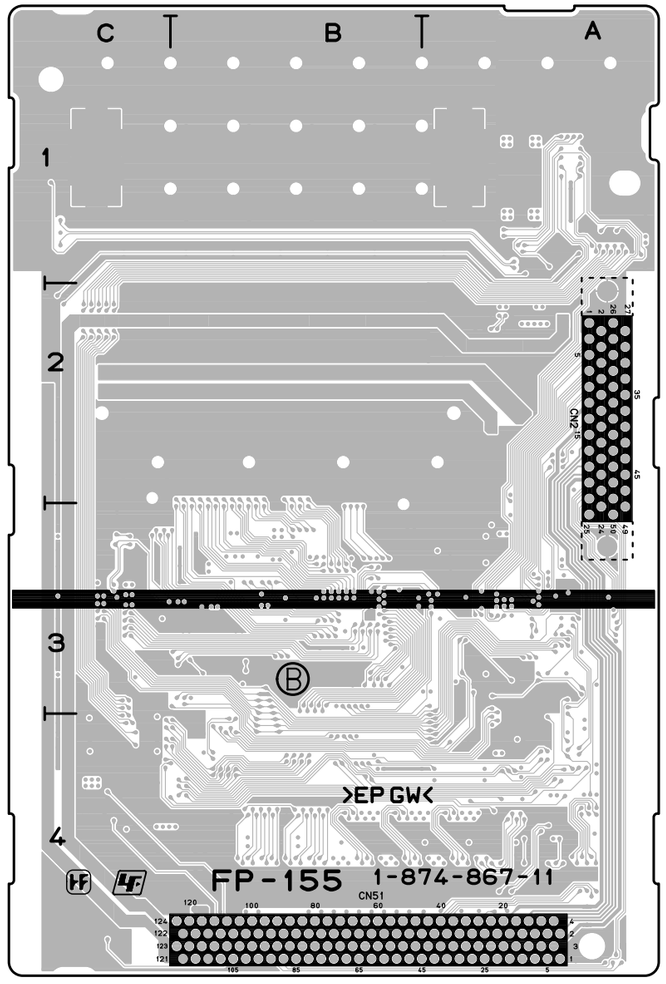

FP-155 -B SIDE-
SUFFIX: -11

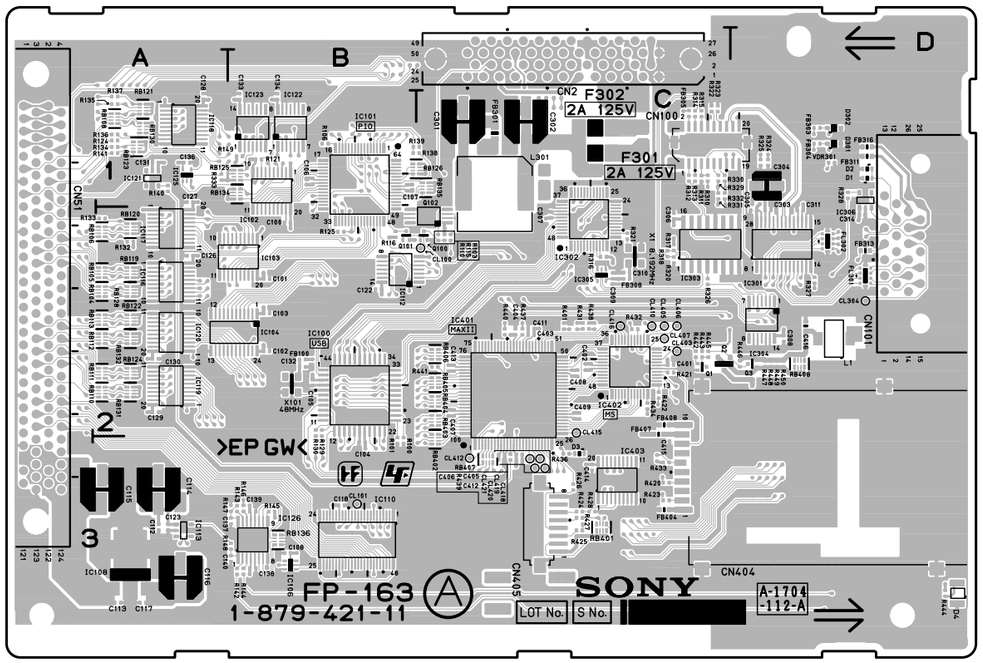

FP-163 -A SIDE-

SUFFIX: -11

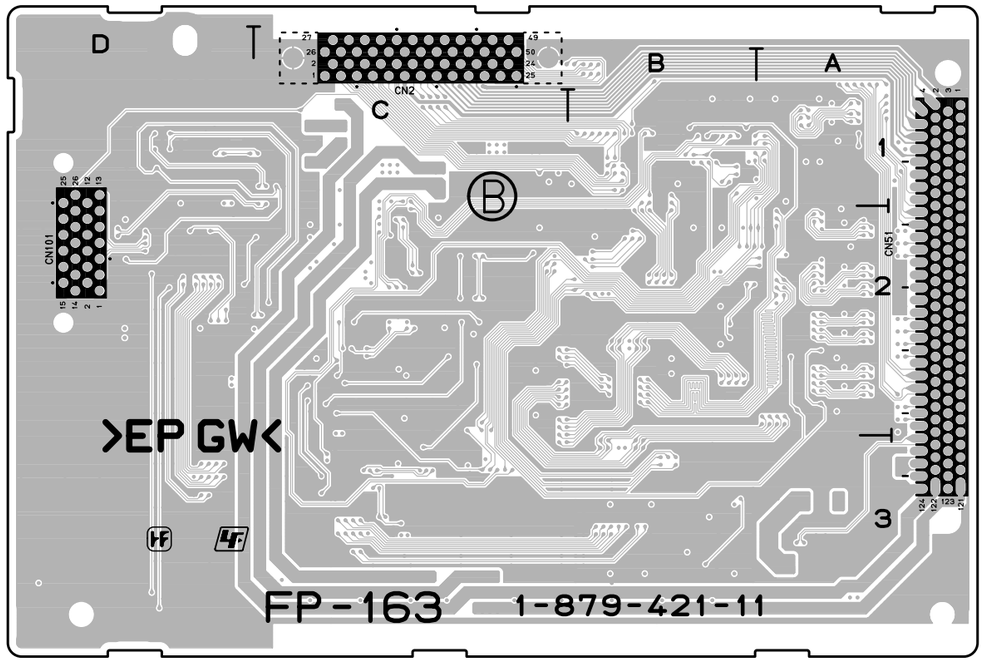

FP-163 -B SIDE-

SUFFIX: -11

FP-163 (1-879-421-11)

C100	B2	C314	D2	D4	D3	IC301	D2	R143	B3	R434	C2	RB404	C2
C101	B2	C401	C2	D301	D1	IC302	C2	R144	B3	R436	C3	RB405	C2
C102	B2	C402	C2	D302	D1	IC303	C2	R145	B3	R437	C2	RB406	C2
C103	B2	C403	C2			IC304	D2	R146	B3	R438	C2	RB407	C3
C104	B3	C404	C2	F301	C1	IC305	C2	R147	B3	R439	C3	RB408	D2
C105	B2	C405	C3	F302	C1	IC306	D1	R148	B3	R440	C2		
C106	B1	C406	C3			IC401	C2	R149	B1	R441	C2	VDR301	D1
C107	B1	C407	C2	FB100	B2	IC402	C2	R310	C1	R442	C2		
C108	B3	C408	C2	FB301	C1	IC403	C3	R311	C1	R443	C2	X1	C2
C112	A3	C409	C2	FB303	D1			R312	C1	R444	D3	X101	B2
C113	A3	C411	C2	FB304	D1	L1	D2	R313	C1	R445	C2		
C114	A3	C412	C3	FB305	C1	L301	C1	R314	C1	R446	D2	*:B SIDE	
C115	A3	C413	C2	FB308	C2			R315	C1	R447	D2		
C116	A3	C414	C3	FB311	D1	Q1	C2	R316	C2	R448	D2		
C117	A3	C415	C3	FB313	D2	Q2	C2	R317	C2	R449	D2		
C118	B3	C416	D2	FB316	D1	Q3	D2	R318	C2	R450	D2		
C122	B2			FB404	C3	Q100	C2	R320	C2				
C123	A3	CL100	C2	FB407	C2	Q101	B2	R321	C2	RB104	A2		
C126	A2	CL101	B3	FB408	C2	Q102	C2	R322	C1	RB105	A2		
C127	A1	CL304	D2					R323	C1	RB106	A2		
C128	A1	CL403	C2	FL301	D2	R100	B3	R324	D1	RB108	A1		
C129	A2	CL405	C2	FL302	D2	R101	B3	R325	D1	RB110	A2		
C130	A2	CL406	C2			R103	C2	R326	C2	RB111	A2		
C131	A1	CL407	C2	IC100	B2	R106	B1	R327	D2	RB112	A2		
C132	B2	CL410	C2	IC101	B1	R110	C2	R328	D1	RB113	A2		
C133	B1	CL412	C3	IC102	B1	R115	C2	R329	C1	RB119	A2		
C134	B1	CL415	C2	IC103	B2	R116	B2	R330	C1	RB120	A2		
C136	A1	CL416	C2	IC104	B2	R121	B1	R331	C1	RB121	A1		
C137	B3	CL418	C3	IC106	B3	R124	A1	R332	C1	RB122	A2		
C138	B3	CL419	C3	IC108	A3	R125	B2	R333	A1	RB123	A1		
C139	B3	CL420	C3	IC110	B3	R129	B2	R401	C2	RB124	A2		
C140	B3	CL421	C3	IC112	B2	R130	B2	R420	C3	RB125	B1		
C301	C1			IC113	A3	R132	A2	R421	C2	RB126	B1		
C302	C1	CN2	C1	IC116	A2	R133	A2	R422	C2	RB128	A2		
C303	D2	CN51	A2	IC117	A2	R134	A1	R423	C3	RB130	A1		
C304	D1	CN100	C1	IC118	A1	R135	A1	R424	C3	RB131	A2		
C305	D2	CN101	D2	IC119	A2	R136	A1	R425	C3	RB132	A2		
C306	C2	CN404	D3	IC120	A2	R137	A1	R426	C3	RB134	B1		
C307	C2	CN405	C3	IC121	A1	R138	B1	R427	C3	RB135	C1		
C308	D2			IC122	B1	R139	B1	R428	C3	RB136	B3		
C309	C2	D1	D1	IC123	B1	R140	A1	R431	C2	RB401	C3		
C310	C2	D2	D1	IC125	A1	R141	A1	R432	C2	RB402	C3		
C311	D2	D3	C3	IC126	B3	R142	B3	R433	C3	RB403	C2		

HIF-46 (1-874-862-11)

C100	E7	C275	*G2	C456	*D4	C749	*N3	C848	*N3	C1149	*J6	C1301	*L4	C1514	*F3	C1787	*J3	C1906	F3	C2105	*C3	C2204	*E4	C2322	*P6	C2527	*C4	C2834	P5	CN11	H7	FB1710	*J3	IC2211	*E6
C101	F7	C276	*L2	C457	*C4	C750	*N3	C849	*M3	C1150	*J6	C1302	*L4	C1515	*F2	C1788	*J3	C1907	F3	C2106	*C3	C2205	*E4	C2323	*P6	C2528	*B5	C2835	J4	CN12	C7	FB1711	*H3	IC2212	*F7
C102	*C6	C277	*L2	C458	*D4	C751	*N2	C850	*N3	C1151	*K6	C1303	*L4	C1516	*F3	C1789	*J2	C1908	F3	C2107	*C3	C2206	*D4	C2324	*P6	C2529	*E7	C2836	F5	CN200	N1	FB1712	*H4	IC2213	F7
C103	*C6	C278	*J1	C459	*C5	C752	*N4	C851	*N3	C1152	*K6	C1304	*L4	C1517	*F3	C1790	*H3	C1909	F3	C2108	*C3	C2207	*E4	C2325	*P6	C2530	*C6	C2837	G5	CN201	M1	FB1713	*H3	IC2214	*E6
C104	E7	C279	*G1	C460	*D4	C753	*N4	C852	*N3	C1153	*K6	C1305	*L4	C1600	J2	C1791	*H3	C2000	F3	C2109	*C3	C2208	*D4	C2327	*G6	C2531	*C5	C2838	P5	CN202	H1	FB2000	*D2	IC2215	*D5
C105	F7	C280	*L2	C461	*D4	C754	*N2	C853	*N3	C1154	*K5	C1306	*L4	C1601	J2	C1792	*H3	C2001	E3	C2110	*C3	C2209	*D4	C2328	*G6	C2532	*C4	C2839	J5	CN203	J1	FB2001	*E3	IC2216	F7
C106	*B6	C281	*M2	C462	*C5	C755	*N4	C854	*N4	C1155	*K5	C1307	*L4	C1602	H2	C1793	*H3	C2002	*D2	C2111	*C3	C2210	*E4	C2329	*G6	C2533	*C4	C2840	G5	CN204	K1	FB2002	*E2	IC2217	C1
C107	*B6	C282	*J1	C463	*D4	C756	*N3	C855	*N4	C1156	*K6	C1308	L4	C1603	H2	C1794	*H3	C2003	*D3	C2112	*C3	C2211	*E4	C2330	*G6	C2600	C6	C2841	*K4	CN205	H1	FB2200	B2	IC2218	B2
C108	*B6	C283	*G1	C464	*D4	C757	*N2	C856	*N4	C1157	*J6	C1309	L4	C1604	H3	C1795	*H3	C2004	*D3	C2113	*B3	C2212	*D4	C2331	*G6	C2601	B6	C2842	*C4	CN206	L1	FB2401	*C5	IC2219	B2
C109	*B6	C284	*L2	C465	*D4	C758	*N4	C857	*M4	C1158	*J6	C1310	L4	C1605	H3	C1796	*J2	C2005	*E2	C2114	*B3	C2213	*D4	C2332	*G6	C2602	A5	C2843	*P2	CN207	M1	FB2500	F2	IC2221	B1
C110	*C6	C285	*L2	C466	*C4	C759	*N4	C858	*M4	C1159	*J6	C1311	L4	C1606	H4	C1797	*J2	C2006	*E3	C2115	*C3	C2214	E4	C2333	*G6	C2603	A5	C2844	*B2	CN208	J1	FB2501	*F7	IC2301	P6
C111	G7	C286	*M2	C467	*D4	C760	*N4	C859	*M4	C1160	*K6	C1312	L4	C1607	*H4	C1798	*H3	C2007	*D2	C2116	*B3	C2215	*E4	C2334	*G6	C2604	A7	C2845	G4	CN209	G1	FB2502	*F7	IC2302	G6
C112	D6	C287	*M2	C468	*D4	C761	*N4	C860	*M4	C1161	*K6	C1313	L4	C1700	G2	C1799	*H3	C2008	*E2	C2117	*C3	C2216	*E4	C2335	*G6	C2605	C5	C2846	B6	CN210	D1	FB2503	*E7	IC2303	*P7
C113	D6	C288	*J1	C469	*D4	C762	*N4	C861	*M4	C1162	*J6	C1314	L4	C1701	J2	C1800	*J3	C2009	*E3	C2118	*C3	C2217	E4	C2336	*G6	C2606	C5	C2847	L5	CN211	D1	FB2504	*F7	IC2304	*G7
C114	G7	C289	*J1	C470	*D4	C763	*N4	C862	*N4	C1163	*K5	C1315	L4	C1702	H2	C1801	*J3	C2010	*D2	C2119	*C3	C2218	*D5	C2337	*G6	C2607	C6	C2848	L5	CN213	E1	FB2622	*F5	IC2400	D6
C115	D5	C290	*G1	C471	*D4	C764	*N4	C863	*N4	C1164	*K5	C1316	L4	C1703	J2	C1802	*H3	C2011	*E3	C2120	*C3	C2219	*D5	C2338	*G6	C2608	C7	C2849	D3	CN2401	C1	FB2623	*F5	IC2401	*C6
C116	E5	C291	*G1	C472	*C4	C765	*N3	C864	*N4	C1165	*K5	C1317	L4	C1704	*H3	C1803	*H3	C2012	*E3	C2121	*C3	C2220	*E5	C2339	*G6	C2609	C6	C2850	*D4			FB2624	*M5	IC2402	*B7
C120	*N7	C292	D2	C473	*D4	C766	*N3	C865	*N4	C1166	*K5	C1318	L3	C1705	*J3	C1804	*H3	C2013	*E3	C2122	*C3	C2221	*E5	C2340	*G6	C2610	A5	C2851	*D4	D501	P2	FB2625	*G5	IC2403	*C7
C121	*N7	C293	D2	C474	*D4	C767	*N3	C866	*N4	C1167	*K5	C1319	L3	C1706	*G2	C1805	*J3	C2014	*E3	C2123	*C3	C2222	*D5	C2341	*G6	C2611	*A7	C2852	D4	D502	P2	FB2626	B4	IC2404	*C7
C122	*N7	C294	*D2	C475	*D4	C768	*N4	C867	*N4	C1168	*K5	C1320	L3	C1707	*G2	C1806	*H3	C2015	*E2	C2124	*C3	C2223	*E5	C2342	*G6	C2612	C5	C3100	*K5	D503	P2			IC2405	*D6
C123	*M6	C295	*D2	C476	*D4	C769	*N4	C900	*K6	C1169	*K5	C1321	L3	C1708	*G2	C1807	*H3	C2016	*E2	C2125	*C3	C2224	*E5	C2343	*G6	C2613	*B6	C3101	*K5	D504	P2	FL2200	E4	IC2406	*B7
C124	N7	C296	D2	C477	*D4	C770	*N3	C901	J6	C1170	*K5	C1322	L3	C1709	*J2	C1808	*H3	C2017	*E3	C2126	*C3	C2225	*E5	C2344	*G6	C2614	C6	C3102	*K5	D900	M6	FL2201	E4	IC2407	*B6
C125	*M6	C297	D2	C478	*D4	C771	*M4	C902	K7	C1171	*J6	C1323	L3	C1710	*J2	C1809	*H3	C2018	*D3	C2127	*C3	C2226	*E5	C2345	*G6	C2615	C7	C3103	*L7	D901	M6			IC2408	*C5
C126	*N6	C298	*D2	C479	*D4	C772	*M4	C904	K7	C1172	*K5	C1324	L3	C1711	*J2	C1810	*H3	C2019	*D3	C2128	*C3	C2227	*E5	C2346	*G6	C2617	*B5	C3104	*K6	D902	M6	IC100	*C6	IC2409	*B5
C127	*M6	C299	*D2	C480	C4	C773	*N4	C905	J7	C1173	*J5	C1325	L3	C1712	*G2	C1811	*H3	C2020	*E3	C2129	*C3	C2228	*E5	C2401	*C6	C2618	*A7	C3105	*J6	D903	M6	IC101	E7	IC2410	*B6
C131	*N6	C304	*D2	C481	C4	C774	*N3	C906	K6	C1174	*J6	C1326	H6	C1713	*J2	C1812	*H3	C2021	*E2	C2130	*C3	C2229	*F5	C2402	*C6	C2627	B5	C3106	*L5	D1400	L1	IC102	F7	IC2411	*B6
C132	*M6	C305	*D2	C482	C4	C775	*N4	C908	K6	C1175	*K6	C1327	H6	C1714	*H2	C1813	*H3	C2022	*E3	C2131	*C4	C2230	*E5	C2403	*C6	C2628	A7	C3107	*J6	D1401	L1	IC103	G7	IC2412	*E6
C133	*N7	C306	*D2	C483	C4	C776	*N3	C909	J6	C1176	*J6	C1328	H6	C1715	*J2	C1814	*H3	C2023	*E2	C2132	*C3	C2231	*F5	C2404	*B6	C2629	*A6	C3108	*K6	D1402	K1	IC104	D6	IC2413	*C1
C134	N7	C307	*D2	C484	*D5	C777	*N3	C910	K7	C1177	*K6	C1329	H6	C1716	*H4	C1815	*H4	C2024	*E2	C2133	*C3	C2232	*D5	C2405	*C6	C2630	C5	C3109	*K6	D1403	K1	IC105	G7	IC2414	*D7
C135	M7	C310	*D2	C485	*D5	C778	*N4	C911	K6	C1178	*K6	C1330	H6	C1717	*J3	C1816	*J3	C2025	*E3	C2134	*C3	C2233	*E5	C2406	*C6	C2632	A6	C3110	*K5	D1900	E2	IC106	D5	IC2415	*C2
C136	*M7	C311	*D2	C486	*D5	C779	*N4	C912	*J7	C1179	*K6	C1331	H6	C1718	*H2	C1817	*J3	C2026	*D3	C2135	*C3	C2234	*E5	C2407	*B7	C2633	B5	C3111	*K5	D1901	E2	IC107	*N7	IC2417	*C2
C137	M7	C313	*D1	C487	*D5	C780	*N4	C913	J7	C1180	*K6	C1332	H7	C1719	*H2	C1818	*J3	C2027	*D3	C2136	*C3	C2235	*E5	C2408	*B6	C2675	G4	C3112	*J6	D1902	E2	IC108	N7	IC2418	C2
C138	M7	C314	*D1	C488	*D5	C781	*N4	C914	K6	C1181	*J5	C1333	H7	C1720	*H2	C1819	*J3	C2028	*E3	C2137	*C3	C2236	*E5	C2409	*C5	C2676	F4	C3113	*J6	D1903	E2	IC109	*M6	IC2419	*P3
C139	*M7	C316	*E1	C489	*D5	C782	*N4	C915	*K7	C1182	*J5	C1334	H5	C1721	*K2	C1820	*J3	C2029	*E3	C2138	*C3	C2237	*F5	C2410	*C5	C2677	F4	C3114	*J6	D2200	*D6	IC110	*N6	IC2420	*L5
C140	M7	C317	*D1	C490	*D5	C783	*N4	C916	J7	C1183	*J5	C1335	H5	C1722	*K2	C1821	*J3	C2030	*E3	C2139	*C3	C2238	*D5	C2411	*C5	C2678	P2	C3115	*L5			IC111	*N6	IC2421	*J3
C141	M7	C319	*D1	C491	D5	C784	*N4	C917	J6	C1184	*K5	C1336	H5	C1723	*K2	C1822	*H3	C2031	*E2	C2140	*C4	C2239	*E5	C2412	*D6	C2679	P5	C3116	*K5	E1	C1	IC112	*M7	IC2423	C1
C142	*M7	C320	*D1	C492	D5	C785	*N4	C918	*J6	C1185	*J5	C1337	H5	C1724	*G2	C1823	*H3	C2032	*E2	C2141	*C3	C2240	*D5	C2415	*B5	C2680	K4	C3117	*J6	E2	F1	IC113	N7	IC2500	*F2
C143	N7	C321	*D1	C493	D5	C786	*N4	C919	*J7	C1186	*J6	C1338	H5	C1725	*J2	C1824	*H3	C2033	*E3	C2142	*C3	C2241	*E5	C2416	*B6	C2681	A2	C3118	*K5	E3	P1	IC114	M7	IC2501	*F1
C144	*M7	C322	*D1	C494	*D5	C787	*N4	C920	J7	C1187	*K5	C1339	H5	C1726	*H2	C1825	*H3	C2034	*E3	C2143	*C3	C2242	*D5	C2417	*B6	C2682	G4	C3119	*K5	E4	G2	IC115	*M7	IC2502	F2
C145	*N7	C325	*M2	C495	*D5	C788	*M4	C921	*J6	C1188	*J6	C1340	H6	C1727	*J2	C1826	*H3	C2035	*E3	C2144	*C3	C2243	*E5	C2418	*E7	C2683	P2	C3120	*K5	E5	L2	IC116	*N7	IC2503	*F7
C146	N7	C326	*M2	C501	*P4	C789	*N4	C922	J6	C1189	*J6	C1341	H6	C1728	*H3	C1827	*H3	C2036	*E3	C2145	*C3	C2244	*E6	C2419	*C1	C2684	N5	C3121	*J5	E6	E5	IC117	*M6	IC2505	*E7
C147	M7	C327	*M2	C502	N4	C790	*N3	C923	*J7	C1190	*J6	C1342	*H5	C1729	*J3	C1828	*H3	C2037	*E3	C2146	*C3	C2245	*E6	C2420	*D7	C2685	H5	C3122	J5	E7	E7	IC200	*N2	IC2506	*C6
C200	*N2	C328	*M3	C503	*N4	C791	*N3	C924	K5	C1191	*K6	C1343	*H5	C1730	*H2	C1829	*J3	C2041	*E3	C2147	*C3	C2246	*E5	C2421	*C2	C2686	B2			E8	N6	IC201	*M2	IC2507	*F2
C201	*N2	C400	*K2	C504	*N4	C792	*N3	C925	K5	C1192	*J5	C1344	*H6	C1731	*H2	C1830	*H3	C2042	*E2	C2148	*C3	C2247	*D5	C2422	*D6	C2687	M5	CL100	*N6	E9	*A1	IC202	*H2	IC2508	*F1
C202	*M2	C401	K3	C505	*N4	C793	*N3	C926	*K5	C1193	*J5	C1345	*H6	C1732	*H2	C1831	*H3	C2043	*E2	C2149	*C3	C2248	*F5	C2423	*D6	C2688	G5	CL101	*N6	E10	*F1	IC204	*K2	IC2509	*E7
C203	*M2	C402	*K3	C506	*N4	C794	*M3	C927	K5	C1194	*J5	C1346	*H6	C1733	*G2	C1832	*H3	C2044	*E2	C2150	*C3	C2249	*E5	C2424	*D6	C2689	L5	CL400	K2	E11	*P1	IC206	*L2	IC2510	*B5
C204	*N2	C403	*K3	C600	N3	C795	*M3	C928	*K5	C1195	*J5	C1347	*H6	C1734	*J2	C1833	*H3	C2045	*E2	C2151	*C3	C2250	*D5	C2425	*D6	C2690	G5	CL401	K3	E12	*G2	IC207	*M2	IC2511	*C7
C205	*M2	C404	*K3	C601	N3	C796	*N4	C929	K5	C1196	*K5	C1348	*H6	C1735	*H2	C1834	*J3	C2046	*E2	C2152	*C3	C2251	*D6	C2426	*D6	C2691	*L5	CL402	K3	E13	*L2	IC208	*J2	IC2512	*C5
C206	*N2	C405	*K3	C605	*N4	C797	*N3	C930	*K5	C1197	*K5	C1349	*H6	C1736	*J2	C1835	*H3	C2047	*E2	C2153	*C3	C2254	*D6	C2427	*D6	C2692	*G5	CL403	K3	E14	*A7	IC209	*G2	IC2513	*C5
C207	*M2	C406	*K3	C606	*P3	C798	*M4	C931	K5	C1198	*K5	C1350	*H5	C1737	*H4	C1836	*H3	C2048	*E2	C2154	*C4	C2255	*E6	C2428	*D6	C2693	M5	CL404	D4	E15	*E7	IC210	*D2	IC2514	*C5
C208	*M2	C407	K3	C700	N2	C799	*N4	C1100	L6	C1200	L7	C1351	*H5	C1738	*J4	C1837	*H3	C2049	*E2	C2155	*C3	C2256	*E5	C2429	*D6	C2694	M5	CL405	D4	E16	*P7	IC211	*D2	IC2515	*C5
C209	*M2	C408	*K3	C701	M2	C800	*N3	C1101	K7	C1201	L7	C1352	L4	C1739	*G2	C1838	*H3	C2050	*E2	C2156	*C3	C2257	*E6	C2430	*D6	C2695	J4	CL406	D4			IC213	*N2	IC2516	*B5
C210	*M2	C409	*K3	C702	P2	C801	*M4	C1102	*J6	C1202	K7	C1353	L3	C1740	*G2	C1839	*H3	C2051	*E2	C2157	*C3	C2258	*D6	C2431	*D7	C2696	J5	CL407	D4	F2600	C6	IC214	*M3	IC2600	A5
C211	*M2	C410	K3	C703	*N4	C802	*M3	C1103	K6	C1203	K7	C1354	*L4	C1741	*G2	C1840	*J3	C2052	*E2	C2158	*C3	C2259	*F6	C2432	*D7	C2699	F5	CL408	D4	F2601	B7	IC400	K3	IC2601	*A7
C212	*N2	C411	*K3	C704	*N4	C803	*M4	C1104	*K5	C1204	L6	C1355	*L3	C1742	*K2	C1841	*H3	C2053	*E3	C2159	*C3	C2260	*E6	C2433	*D7	C2700	*B3	CL409	D4	F2602	A6	IC401	K2	IC2602	*M5
C213	*N2	C412	*K3	C705	*N2	C804	*N4	C1105	J5	C1205	K7	C1356	*L3	C1743	*K2	C1842	*J3	C2054	*E3	C2160	*B3	C2261	*D5	C2434	*D6	C2701	B3	CL410	D4	F2603	B7	IC402	K2	IC2603	*F6
C214	*M2	C413	*K3	C706	*N2	C805	*N4	C1106	*K6	C1206	*L7	C1357	L4	C1744	*K2	C1843	*H3	C2055	*E3	C2161	*B3	C2262	*F7	C2435	*D6	C2702	*B3	CL411	D4	F2604	B7	IC403	K3	IC2604	F4
C215	*M2	C414	K3	C707	*N2	C806	*N4	C1107	*K6	C1207	*L7	C1358	L4	C1745	*G2	C1844	*J3	C2056	*E3	C2162	*B3	C2263	F7	C2436	*E6	C2703	*B2	CL600	M2			IC404	K2	IC2605	*P2
C216	*N2	C415	*K3	C708	*M2	C807	*N3	C1108	*K6	C1208	*K7	C1359	H7	C1746	*G2	C1845	*H3	C2057	*E3	C2163	*B3	C2264	F7	C2437	*D6	C2704	*B4	CL1100	J5	FB100	D6	IC405	D4	IC2606	P5
C217	*N2	C416	*K3	C709	*M2	C808	*N3	C1109	*K5	C1209	*L7	C1360	H6	C1747	*G2	C1846	*J3	C2058	*E3	C2164	*B3	C2265	*E5	C2438	*D6	C2705	*C2	CL1200	*K7	FB101	*M6	IC406	D5	IC2607	J4
C218	*M2	C417	*K3	C710	*M2	C809	*N4	C1110	*K6	C1210	*K7	C1361	*H5	C1748	H2	C1847	*H3	C2059	*E3	C2165	*B3	C2266	*F5	C2439	*D6	C2706	*D2	CL1201	*L7	FB400	K3	IC407	D5	IC2608	B2
C219	*M2	C418	*K3	C711	*N2	C810	*N4	C1111	*K6	C1211	*K7	C1362	H7	C1749	G2	C1848	*H3	C2060	*E3	C2166	*B3	C2267	C1	C2440	*D6	C2707	*A2	CL1202	*L7	FB401	K3	IC408	*D5	IC2609	*L5
C222	*H2	C419	*K3	C712	*M2	C811	*N4	C1112	*K6	C1212	*L7	C1363	H7	C1750	*J2	C1849	*H3	C2061	*E3	C2167	*B3	C2268	C1	C2441	*E7	C2708	*B2	CL1203	*L7	FB402	*K2	IC409	*K3	IC2610	*G5
C223	*H2	C420	*K3	C713	*P2	C812	*N4	C1113	*K6	C1213	*K7	C1364	H6	C1751	*J2	C1850	*H3	C2062	*E3	C2168	*B3	C2269	D4	C2443	*C2	C2709	*B4	CL1204	*L7	FB403	*K4	IC410	*D5	IC2611	*K4
C224	*K2	C421	*K3	C714	*N4	C813	*N4	C1114	*K5	C1214	*K7	C1365	H6	C1752	*J2	C1851	*H3	C2063	*E3	C2169	*B3	C2270	E4	C2444	C2	C2710	*B4	CL1600	*H3	FB404	*K3	IC501	*P4	IC2612	B4
C225	*K2	C422	*K3	C715	*N4	C814	*N4	C1115	*K5	C1215	*L7	C1400	H4	C1753	*J3	C1852	*H3	C2064	*E3	C2170	*C3	C2271	D4	C2445	C1	C2800	*M6	CL2100	C4	FB405	*K2	IC502	N4	IC2613	F5
C228	*H2	C423	*K3	C716	*P2	C815	*N4	C1116	*K6	C1216	*K7	C1401	H4	C1754	*J3	C1853	*H3	C2071	*E2	C2171	*B3	C2272	E4	C2446	*P3	C2801	*M6	CL2101	C4	FB406	*D4	IC1111	E3	IC2614	A4
C229	*H2	C424	*K3	C717	*P2	C816	*N3	C1117	*K6	C1217	*K7	C1402	H4	C1755	*J3	C1854	*J3	C2072	*E2	C2172	*C3	C2273	B1	C2447	*L5	C2802	*M6	CL2102	C4	FB407	*C5	IC1200	*L7	IC2615	*D3
C232	*K2	C425	*K3	C718	*P2	C817	*N3	C1118	*J6	C1218	*L7	C1403	H4	C1756	*H2	C1855	*J3	C2073	*E2	C2173	*B3	C2274	B2	C2448	*J3	C2803	*F6	CL2103	*C3	FB408	*D5	IC1201	L7	IC3000	N4
C233	*K2	C426	*K3	C719	*N2	C818	*N3	C1119	*J6	C1219	*L7	C1404	H4	C1757	*G2	C1856	*J3	C2074	*E2	C2174	*B3	C2275	B1	C2450	*P3	C2804	*F6	CL2104	C2	FB409	*D5	IC1300	*L4	IC3001	K6
C236	*H2	C427	*K3	C720	*N2	C819	*N3	C1120	*K5	C1220	*L7	C1405	H4	C1758	*H4	C1857	*J3	C2075	*E2	C2175	*B3	C2276	B2	C2451	*L5	C2805	*F6	CL2105	*C2	FB700	*N2	IC1301	L4		
C238	*K2	C428	K3	C721	*N2	C820	*N3	C1121	*J5	C1221	*L7	C1410	J4	C1759	*H3	C1858	*J3	C2076	*E2	C2176	*B3	C2277	A2	C2452	*J3	C2806	M6	CL2106	*C2	FB701	*M2	IC1302	L3	L200	*N2
C240	*H1	C429	K3	C722	*N2	C821	*N3	C1122	*K6	C1222	*M7	C1411	J4	C1760	*H2	C1859	*J3	C2077	*E2	C2177	*B2	C2278	A2	C2454	*C6	C2807	F6	CL2107	*C2	FB702	*N2	IC1303	H6	L201	*M2
C242	*K1	C430	K3	C723	*M2	C822	*N3	C1123	*K6	C1223	*L7	C1412	*J4	C1761	*G2	C1860	*H3	C2078	*E2	C2178	*B2	C2279	B2	C2500	*F2	C2808	*M5	CL2108	*C2	FB703	*P2	IC1304	H5	L202	M2
C244	*H1	C431	K3	C724	*P2	C823	*N3	C1124	*J5	C1224	*M7	C1413	J4	C1762	*H2	C1861	*H3	C2079	*E3	C2179	*C3	C2280	B1	C2501	*F1	C2809	*F6	CL2109	*C2	FB704	*M4	IC1305	*H5	L203	N2
C246	*K1	C432	*K3	C725	N4	C824	*N3	C1125	*K5	C1225	*L7	C1414	*J4	C1763	*G2	C1862	*H4	C2080	*E3	C2180	*C3	C2281	B2	C2502	*F7	C2810	E6	CL2110	C2	FB705	*N4	IC1500	*G3	L204	H2
C248	*H1	C433	*K2	C726	*P4	C825	*M3	C1126	*K5	C1226	*M7	C1415	*J4	C1764	*H3	C1863	*H3	C2081	*E3	C2181	*C3	C2282	B1	C2503	*F7	C2811	E6	CL2111	C2	FB706	*P4	IC1501	*G2	L206	K2
C249	*H1	C434	*K4	C727	*N3	C826	*M3	C1127	*K6	C1227	*L7	C1416	J4	C1765	*J3	C1864	*H4	C2082	*E3	C2182	*C3	C2283	D4	C2504	F1	C2812	M5	CL2112	*C2	FB707	*N4	IC1502	G3	L208	*H1
C252	*K1	C435	*K3	C728	*N3	C827	*N3	C1128	*K5	C1228	*L7	C1417	J4	C1766	*J3	C1865	*H4	C2083	*E3	C2183	*A2	C2284	E4	C2505	F2	C2813	E6	CL2113	*C2	FB708	*M3	IC1503	G2	L209	*K1
C253	*K1	C436	*K2	C729	*N3	C828	*M3	C1129	*K6	C1229	*L7	C1418	*J4	C1767	*H4	C1866	*J3	C2084	*E3	C2184	*B4	C2301	*P7	C2506	F2	C2814	*M5	CL2114	C3	FB709	*M4	IC1504	*F3	L210	*K1
C256	*M2	C437	*K2	C730	*N2	C829	*M3	C1130	*K6	C1230	*L7	C1419	*H4	C1768	*H4	C1867	*J3	C2085	*E3	C2185	A3	C2302	*H7	C2507	F2	C2815	*F6	CL2115	C3	FB710	*N4	IC1505	*F3	L211	*H1
C257	*M2	C438	*K2	C731	*M2	C830	*M3	C1131	*K6	C1231	*L7	C1420	J4	C1769	*J3	C1868	*J3	C2086	*E3	C2186	*A3	C2303	*P7	C2508	*C6	C2816	*M5	CL2116	*C3	FB711	*M4	IC1506	*F3	L212	L2
C258	*L2	C439	*K4	C732	*P2	C831	*N3	C1132	*K6	C1232	*M7	C1421	*J4	C1770	*H3	C1869	*J3	C2087	*E3	C2187	B3	C2304	*H7	C2509	*C6	C2817	*M5	CL2117	*C3	FB1100	*K5	IC1507	*F3	L213	M2
C259	*L2	C440	K4	C733	*M4	C832	*N3	C1133	*K6	C1233	*L7	C1422	J4	C1771	*H3	C1870	*J3	C2088	*E3	C2188	*B3	C2306	*P6	C2510	*C6	C2818	*F6	CL2118	*C3	FB1200	*K7	IC2000	H3	L214	J2
C260	*J2	C441	*K3	C734	*N4	C833	*N3	C1134	*K6	C1234	*L7	C1423	J4	C1772	*J3	C1871	*J3	C2089	*E3	C2189	B3	C2307	*P6	C2511	*C6	C2819	*F6	CL2119	*C3	FB1201	*L7	IC2100	C3	L215	G2
C261	*J2	C442	K3	C735	*N3	C834	*N3	C1135	*K6	C1235	*M7	C1500	*G3	C1773	*J3	C1872	*H3	C2090	*E3	C2190	*B3	C2308	*P6	C2512	G2	C2820	*M5	CL2120	*C3	FB1202	*L7	IC2101	B3	L216	*L2
C262	*G2	C443	*K2	C736	*N3	C835	*N3	C1136	*K6	C1236	*L7	C1501	*G2	C1774	*H4	C1873	*H3	C2091	*E3	C2191	A3	C2309	*P6	C2513	*C6	C2821	*M5	CL2121	*C3	FB1203	L7	IC2102	*B3	L217	*L2
C263	*G2	C444	*K2	C737	*N3	C836	*M4	C1137	*J5	C1237	*L7	C1502	F3	C1775	*H4	C1874	*H3	C2092	*E3	C2192	*B3	C2310	*N6	C2514	*C6	C2822	*F6	CL2301	*P6	FB1500	G3	IC2103	*C2	L218	*J1
C264	*L2	C445	K2	C738	*N3	C837	*M4	C1138	*L5	C1238	*M7	C1503	F3	C1776	*H4	C1875	*H3	C2093	*E3	C2193	A3	C2311	*P6	C2515	*F7	C2823	*F6	CL2302	*P6	FB1501	G3	IC2200	*E4	L219	*G1
C265	*L2	C446	K2	C739	*N3	C838	*M4	C1139	*K5	C1239	*L7	C1504	G3	C1777	*J4	C1876	*H3	C2094	*E3	C2194	*B3	C2312	*P6	C2516	*F7	C2824	K4	CL2303	*P6	FB1700	*G2	IC2201	*E4	L220	D2
C266	*M2	C447	K3	C740	*N3	C839	*N4	C1140	*J5	C1240	*L7	C1505	G3	C1778	*J3	C1877	*H3	C2095	*E3	C2195	B3	C2313	*P6	C2517	F2	C2825	B4	CL2304	*G6	FB1701	*J2	IC2202	*E5	L221	D2
C267	*M2	C448	*K2	C741	*N3	C840	*N4	C1141	*K5	C1241

L2202	*E5	R131	E6	R249	*K2	R380	*N2	R609	P3	R709	P3	R941	J7	R1149	*L5	R1336	*J6	R1612	J3	R1711	G3	R1959	D2	R2141	*C2	R2276	*E5	R2427	*D6	R2545	*F1	R3037	B2	RB2405	*B7
L2203	*E5	R132	D5	R251	K2	R381	*N2	R610	P3	R710	P3	R942	*J6	R1150	*L5	R1337	*J6	R1613	J2	R1712	G3	R1960	D2	R2142	*C2	R2277	*C1	R2429	D6	R2546	*F1	R3038	B1	RB2406	*B7
L2204	*D5	R133	D5	R254	*H2	R382	*N2	R611	P3	R711	P3	R943	*J6	R1154	L6	R1338	H6	R1614	J3	R1713	G3	R1961	D2	R2143	*C4	R2278	*C1	R2430	D6	R2547	*F1	R3039	B1	RB2407	*C7
L2205	*E5	R134	E6	R256	*K2	R383	*M3	R612	P3	R712	P3	R944	J6	R1155	*L6	R1339	*H5	R1615	J3	R1714	G3	R1962	D3	R2144	*C4	R2282	E4	R2431	D6	R2548	G1	R3040	B1	RB2408	*B7
L2206	A2	R135	D5	R258	*H1	R384	*M3	R613	P3	R713	P3	R945	J6	R1156	*L6	R1400	H4	R1616	J2	R1715	J3	R1963	F3	R2145	*C4	R2283	*C1	R2432	D6	R2549	G1	R3041	B1	RB2409	*C7
L2500	*F7	R136	*N7	R260	*K1	R385	*M2	R614	P3	R714	P4	R946	*J7	R1157	*L6	R1401	H4	R1617	J2	R1716	J3	R1964	F3	R2146	C4	R2284	*C1	R2433	D6	R2550	G1	R3042	*F7	RB2410	*B7
L2600	C5	R137	*N7	R261	*H1	R386	*M3	R615	P3	R715	P4	R947	*J7	R1158	L6	R1402	H4	R1618	J2	R1717	J3	R1965	F3	R2147	*C4	R2285	C1	R2434	*D6	R2551	*C4	R3043	F7	RB2411	*B7
L2601	C6	R138	*N7	R264	*K1	R387	*K1	R616	P3	R716	N2	R948	*L6	R1159	L6	R1403	H4	R1619	J2	R1718	J3	R1966	F3	R2148	C4	R2286	*E5	R2435	D6	R2552	*C4	R3044	F7	RB2412	*B7
L2602	C7	R139	*N7	R266	*H1	R388	*H1	R617	N3	R717	N2	R949	*K6	R1160	J6	R1404	H4	R1620	J2	R1719	J3	R1967	F3	R2149	C4	R2287	*F5	R2436	*D6	R2553	*C4	R3300	*K1	RB2413	*B6
L2604	B5	R140	*N7	R267	*H1	R389	*K1	R618	N3	R718	N2	R950	*K6	R1161	*J6	R1405	H4	R1621	J2	R1720	J3	R1968	F3	R2150	*C3	R2288	C1	R2437	*D6	R2554	*C5	R3301	*H1	RB2414	*B5
L2609	A6	R141	*N7	R270	*K1	R390	*H1	R619	N3	R719	N2	R951	*K6	R1162	L5	R1406	H4	R1622	J2	R1721	J3	R1969	F3	R2151	C3	R2289	C1	R2438	D6	R2555	*C6	R3302	*K1	RB2415	*B5
L2610	B5	R142	*N7	R271	*K1	R391	*J1	R620	N3	R720	N2	R952	K5	R1163	J6	R1407	H4	R1623	J2	R1722	J4	R1970	F3	R2152	C3	R2290	C1	R2439	*D6	R2556	*C5	R3303	*H1	RB2416	*C7
L2620	G4	R143	*N7	R274	*H1	R392	*G1	R621	M3	R721	N2	R953	K5	R1164	J6	R1408	H4	R1624	H2	R1723	J3	R2000	*E2	R2153	C2	R2291	*B1	R2440	D6	R2557	*C5	R3304	*J1	RB2417	*B5
L2621	F4	R144	*M6	R276	*K1	R393	*M2	R622	M3	R722	M2	R954	K5	R1165	*J6	R1409	H4	R1625	H2	R1724	G3	R2001	*E2	R2154	C2	R2292	*B1	R2441	D6	R2558	*C5	R3306	*G1	RB2418	*B6
L2622	N5	R145	*M6	R278	*H1	R394	*L2	R623	M3	R723	M2	R955	K5	R1166	L6	R1410	H4	R1626	H2	R1725	*H4	R2002	*E2	R2155	C2	R2293	C1	R2442	D6	R2559	*C5	R3307	*L2	RB2419	*C1
L2623	N5	R146	*M6	R280	*K1	R400	*K2	R624	M3	R724	*N4	R956	*K5	R1167	*J6	R1411	H4	R1627	H2	R1726	*J2	R2003	*E2	R2156	C2	R2294	C1	R2443	D6	R2560	*C5	R3308	*L2	RB2420	*D7
L2624	H4	R147	*M6	R282	*M2	R401	*K2	R625	M3	R725	*N4	R957	*K5	R1168	L6	R1420	J4	R1628	H2	R1727	*J2	R2005	F3	R2157	C2	R2295	*D4	R2444	D6	R2561	*C5			RB2421	*C1
L2625	H4	R148	*M6	R283	*M2	R402	*K2	R626	M3	R726	N2	R958	K5	R1169	L6	R1421	J4	R1629	H2	R1728	*J2	R2006	*E2	R2158	C3	R2296	*B1	R2445	*B6	R2562	*C5	RB100	*G7	RB2422	*D7
L2627	M5	R149	N7	R284	*L2	R403	K2	R627	M3	R727	N2	R959	K5	R1170	L6	R1422	J4	R1630	H2	R1729	*J2	R2007	F3	R2159	C4	R2297	*E4	R2446	*E7	R2563	*C4	RB101	*G7	RB2423	*B7
L2628	F6	R150	N7	R285	*L2	R404	K2	R628	M3	R728	P4	R960	*K5	R1171	J5	R1423	J4	R1631	H2	R1730	*H3	R2008	*E2	R2160	C4	R2298	*B1	R2447	*D6	R2564	*C4	RB102	G7	RB2424	*C7
		R151	N7	R286	*J2	R405	K2	R629	M3	R729	P4	R961	*K5	R1172	*J5	R1424	*J4	R1632	H3	R1731	*H3	R2011	E3	R2161	*C4	R2301	N6	R2448	*D6	R2565	*B5	RB103	G7	RB2425	*B7
Q204	H2	R152	*M6	R287	*J2	R406	K2	R630	M3	R730	P3	R962	K5	R1173	J6	R1425	*J4	R1633	H2	R1800	H2	R2012	E3	R2162	*C4	R2302	*N6	R2449	*D6	R2566	*B5	RB104	*N7	RB2426	*B6
Q206	K2	R153	*M6	R288	*G2	R407	K3	R631	M3	R731	P3	R963	K5	R1174	*J6	R1426	J4	R1634	H2	R1801	H2	R2013	D3	R2163	C4	R2303	N6	R2450	*D6	R2567	*B4	RB105	*N7	RB2427	*B7
Q208	H2	R154	*M6	R289	*G2	R408	K3	R632	M3	R732	P3	R964	*K5	R1175	J5	R1427	J4	R1635	H2	R1802	J2	R2014	D3	R2200	*E5	R2304	G6	R2451	*D6	R2568	*B4	RB106	*M7	RB2428	*B6
Q210	K2	R155	*M6	R290	L2	R409	K3	R633	M3	R733	P3	R965	*K5	R1176	*J5	R1428	*J4	R1636	H3	R1803	J2	R2015	F3	R2201	*E5	R2305	*G6	R2452	*D6	R2569	*B4	RB107	*M7	RB2429	*B5
Q212	L2	R156	*M6	R291	L2	R410	K3	R634	M3	R734	P4	R966	K5	R1177	*J6	R1429	*J4	R1637	H3	R1804	H2	R2016	F3	R2202	*E5	R2306	F6	R2453	*D6	R2570	*B4	RB501	*N2	RB2500	*C7
Q213	L2	R157	*M6	R292	*L2	R411	K3	R635	N3	R735	P3	R967	K5	R1178	*J6	R1430	*J4	R1638	H3	R1805	H2	R2017	E2	R2203	*E5	R2307	N5	R2454	*D6	R2571	*B4	RB502	M3	RB2501	D7
Q214	J2	R158	*M6	R293	J2	R412	*K3	R636	N3	R736	P4	R968	*M6	R1179	*J6	R1431	*J4	R1639	H3	R1806	H2	R2018	E2	R2204	*E5	R2308	G6	R2455	*D6	R2572	*B4	RB503	M3	RB2502	*C7
Q215	G2	R159	*M6	R294	G2	R413	K4	R637	N3	R737	N2	R969	*M6	R1180	*J6	R1432	J4	R1640	*J3	R1807	H2	R2019	D3	R2205	*E5	R2309	P6	R2456	*D6	R2645	F5	RB504	M3	RB2503	*C7
Q216	L2	R162	*M7	R295	*L2	R414	K3	R638	M3	R738	P3	R970	*M6	R1181	J6	R1433	J4	R1641	*J3	R1808	H2	R2023	E3	R2206	*D4	R2310	G6	R2457	*D6	R2650	P5	RB505	M3	RB2504	*E7
Q217	L2	R163	N7	R296	*J2	R415	K4	R639	P3	R739	P3	R971	*M6	R1182	L6	R1434	J4	R1642	*H3	R1809	H2	R2027	D3	R2207	*E4	R2311	P5	R2458	*D6	R2651	K5	RB506	M4	RB2505	*E7
Q218	J2	R164	M7	R297	*L2	R416	K3	R640	P3	R740	P3	R1027	H7	R1183	J6	R1435	J4	R1643	*H3	R1810	J2	R2033	E3	R2208	*D4	R2312	P5	R2459	*D6	R2652	P5	RB507	M4	RB2506	*E7
Q219	G2	R165	*N7	R298	*G2	R417	K4	R641	P3	R741	P3	R1032	*J5	R1184	L5	R1436	*J4	R1644	J3	R1811	J2	R2039	*D3	R2209	*D4	R2313	P5	R2460	C1	R2653	J4	RB508	M4	RB2507	*C7
Q220	D2	R166	N7	R299	*M2	R418	K3	R642	P3	R742	M3	R1033	J5	R1185	L6	R1437	*J4	R1645	J3	R1812	H2	R2040	*D3	R2210	*D4	R2314	P5	R2461	*D6	R2654	J5	RB509	M4	RB2508	D7
Q221	D2	R167	M7	R300	L2	R419	K3	R643	P3	R743	M3	R1034	J5	R1186	*K6	R1438	*J4	R1646	J3	R1813	H2	R2041	E2	R2211	*E4	R2315	P5	R2462	*D6	R2655	P5	RB510	*M4	RB2509	*E7
Q223	D2	R168	*M7	R301	*J2	R420	K2	R644	P3	R744	M3	R1035	*J5	R1187	*L6	R1439	*J4	R1647	J3	R1814	H2	R2042	E2	R2212	*E4	R2316	P5	R2463	*D6	R2656	P5	RB511	*M4		
Q224	D2	R169	M7	R302	L2	R421	K4	R645	P3	R745	*M3	R1036	*J6	R1188	L6	R1440	J4	R1648	J3	R1815	H2	R2043	E2	R2213	*E4	R2317	P5	R2464	*C2	R2657	J5	RB512	L3	RV2200	B1
Q400	*K2	R170	M7	R303	J2	R422	K3	R646	P3	R746	*M3	R1037	*J5	R1189	*K7	R1441	J4	R1649	J3	R1816	*H2	R2044	*E3	R2214	*D4	R2318	P5	R2465	*D6	R2659	F5	RB513	L3	RV2201	B1
Q401	*K4	R171	*M7	R304	G2	R423	*K2	R647	N3	R747	*M3	R1038	J5	R1190	*L6	R1442	*J4	R1650	J3	R1817	H2	R2045	E2	R2215	*D4	R2319	G6	R2466	*D7	R2660	F5	RB514	*L3	RV2202	C1
Q402	*K3	R172	M7	R305	*G2	R424	K2	R648	N3	R748	P4	R1039	J5	R1191	*J5	R1443	*J4	R1651	J2	R1818	H2	R2046	*E3	R2216	*E4	R2320	G6	R2467	*D7	R2661	*M6	RB515	*L3	RV2203	C1
Q403	*K2	R173	M7	R306	*L2	R425	*K4	R649	P3	R749	P4	R1040	J5	R1192	*J6	R1444	J4	R1652	H2	R1900	F4	R2051	D3	R2217	*E4	R2321	G6	R2468	*D7	R2662	*M6	RB516	L3		
Q404	*D5	R174	*M7	R307	*L2	R426	*K3	R650	P3	R750	P4	R1041	J6	R1193	*J5	R1445	J4	R1653	H2	R1901	F3	R2052	*E3	R2218	*B1	R2322	G6	R2469	*P3	R2663	*M5	RB600	P3	S501	N2
Q405	*D5	R175	M7	R308	*J2	R427	K4	R651	N3	R751	P4	R1042	*J5	R1194	*J5	R1446	J4	R1654	H2	R1902	F3	R2053	D3	R2219	*B1	R2323	G6	R2470	*P3	R2664	*M5	RB601	P3	S900	H7
Q2200	*E5	R176	M7	R309	*G2	R428	K4	R652	N3	R800	N3	R1043	*J5	R1195	*J6	R1447	J4	R1655	H2	R1903	F3	R2054	D3	R2220	D4	R2324	G6	R2471	*P3	R2665	*M5	RB900	H7	S1400	L1
Q2201	*F5	R177	*M7	R310	*L2	R429	*D4	R653	N3	R801	N3	R1044	*J5	R1196	*J6	R1448	*L1	R1656	H3	R1904	F3	R2055	D2	R2221	E4	R2325	G6	R2472	*P3	R2666	*M5	RB901	*J6	S1900	E1
		R178	M7	R311	*M2	R430	*D5	R654	N3	R802	N3	R1045	*J5	R1200	L7	R1449	*L2	R1657	H3	R1905	F3	R2058	D3	R2222	*E5	R2326	G6	R2473	*L5	R2667	*M5	RB902	*J6	S2401	E1
R1	P7	R179	M7	R312	*J1	R431	*D5	R655	N3	R803	N3	R1046	*J5	R1201	L7	R1450	*K1	R1658	G3	R1906	F3	R2059	D3	R2223	*F5	R2327	*N7	R2474	*L4	R2668	*M5	RB903	*J5	S2402	D7
R2	P7	R180	*M7	R313	*L2	R432	D5	R656	N3	R804	N3	R1047	*J5	R1202	L7	R1451	*K2	R1659	G3	R1907	F3	R2061	D3	R2224	*E5	R2328	*G7	R2475	*K3	R2669	*M5	RB904	*J5		
R3	*P7	R181	N7	R314	*G1	R433	D5	R657	M3	R805	N3	R1056	J6	R1203	L7	R1452	*L1	R1660	H3	R1908	F3	R2062	D3	R2225	*F5	R2329	*N7	R2476	*K3	R2670	*M5	RB905	J5	TP100	G7
R4	*P7	R182	*M7	R315	*M2	R434	D5	R658	M3	R806	N3	R1057	*J6	R1204	K7	R1453	*L1	R1661	J3	R1909	F3	R2063	D3	R2226	*E5	R2330	*G7	R2479	*P3	R2671	*F6	RB906	J5	TP101	N6
R5	P7	R183	N7	R316	*J1	R435	D5	R659	M3	R807	N3	R1058	*K6	R1205	K7	R1454	*K1	R1662	J3	R1910	F3	R2064	D3	R2227	*E5	R2331	*P7	R2480	*L4	R2672	*F6	RB907	J5	TP501	P1
R6	P7	R184	*M7	R317	*G1	R436	C4	R660	M3	R808	N3	R1100	L6	R1206	K7	R1455	*K1	R1663	J3	R1911	F3	R2065	D3	R2228	*E5	R2332	*H7	R2481	*J3	R2673	*F6	RB908	J6	TP502	P1
R7	*P7	R185	*M7	R318	*L2	R437	C4	R661	N3	R809	N3	R1101	K7	R1207	K7	R1456	J3	R1664	G3	R1912	*E2	R2070	F3	R2229	*E5	R2334	*N6	R2483	*P3	R2674	*F6	RB909	J6	TP503	P1
R8	*P7	R186	*M7	R319	*L2	R438	C4	R662	N3	R810	N3	R1102	K6	R1208	K7	R1500	*G3	R1665	G3	R1913	*E2	R2071	F3	R2230	*E5	R2335	*N6	R2484	*C6	R2675	*F6	RB910	J6	TP504	P1
R9	P7	R187	*M7	R320	*M2	R439	C4	R663	M3	R811	N3	R1103	K7	R1209	K7	R1501	*G3	R1666	H3	R1914	*E2	R2072	E3	R2231	*E5	R2336	*N6	R2485	*C1	R2676	*F6	RB911	J6	TP900	J7
R10	P7	R188	N7	R321	*M2	R440	C4	R664	M3	R812	M2	R1104	*J6	R1210	*K7	R1502	*G2	R1667	J3	R1915	*E2	R2076	*E3	R2232	*E5	R2337	*N6	R2486	D6	R2677	*F6	RB912	J6	TP901	J7
R11	*P7	R189	N7	R322	*J1	R441	D5	R665	M3	R813	M3	R1105	K6	R1211	*K7	R1503	*G2	R1668	J3	R1916	*F1	R2077	*E3	R2233	*E5	R2339	*G6	R2487	D6	R2678	*F6	RB913	*H6	TP902	H7
R12	*P7	R190	N7	R323	*J1	R442	D5	R666	M3	R814	M2	R1106	*J6	R1212	*K7	R1504	*G3	R1669	J3	R1917	*E1	R2080	*E3	R2234	*E5	R2340	*G6	R2500	*F7	R2679	*F6	RB914	H7	TP903	H7
R13	P7	R191	N7	R324	*G1	R443	D5	R667	P3	R815	M3	R1107	K6	R1213	*L7	R1505	*G2	R1670	H4	R1918	*E1	R2100	B3	R2235	*E5	R2341	*G6	R2501	*F7	R2680	*F6	RB915	H7	TP1400	L1
R14	P7	R192	M7	R325	*G1	R444	K3	R668	P4	R816	N3	R1108	*K5	R1215	*L7	R1506	*F3	R1671	H4	R1919	*E1	R2101	B3	R2236	*E5	R2342	*G6	R2502	*F2	R2681	*M5	RB916	*H6	TP1401	L2
R15	*P7	R193	M7	R326	*L2	R445	K3	R669	P4	R817	N3	R1109	J5	R1216	*L7	R1507	*F2	R1672	*H4	R1920	E2	R2102	B3	R2237	*E5	R2343	N6	R2503	*F7	R2682	*M5	RB917	*H6	TP1402	K1
R16	*P7	R194	M7	R327	*L2	R501	*P1	R670	M4	R818	N3	R1110	*K5	R1217	*L7	R1508	G3	R1673	*H4	R1921	E2	R2103	*B3	R2238	*E5	R2344	*N6	R2504	*F7	R2683	*F6	RB1100	*L6	TP1403	K2
R17	N7	R195	D5	R328	*J1	R502	*P1	R671	M4	R900	*K6	R1111	J5	R1218	*L7	R1509	G2	R1674	*H4	R1922	E3	R2104	*B4	R2239	*E5	R2345	F6	R2505	*F2	R3000	B2	RB1101	*L6	TP1900	F1
R18	N7	R200	*N2	R329	*G1	R503	*P1	R672	N2	R901	J6	R1113	J5	R1219	*M7	R1510	F3	R1675	*H4	R1923	D3	R2105	B4	R2240	*F5	R2346	*G6	R2506	*F2	R3001	*B2	RB1102	*L7	TP1901	E1
R19	*N7	R201	*N2	R330	*L2	R504	*P1	R673	N2	R902	K7	R1114	L6	R1220	*L7	R1511	F2	R1676	*H4	R1924	D2	R2106	B3	R2241	*F5	R2347	*N6	R2507	G2	R3002	*B1	RB1103	L5	TP1902	E1
R20	*N7	R202	*N2	R331	*M2	R505	*P2	R674	M4	R904	*K6	R1115	L6	R1300	M4	R1512	F3	R1677	H3	R1925	D2	R2107	B3	R2242	*E5	R2348	*N6	R2508	*C5	R3003	*B2	RB1300	*L4	TP1903	E1
R21	N7	R203	*M2	R332	*J1	R506	*P2	R676	M4	R905	J6	R1116	L6	R1301	M3	R1513	F3	R1678	G3	R1926	D3	R2108	B3	R2243	*F5	R2349	*G6	R2509	*C6	R3004	*B1	RB1301	*L3	TP2100	D3
R22	N7	R204	*M2	R333	*G1	R507	*P2	R677	M4	R906	K7	R1117	*K6	R1302	*L3	R1514	F3	R1679	G3	R1927	D3	R2109	B3	R2244	*E5	R2350	*G6	R2510	*F7	R3005	*B2	RB1400	*L1	TP2101	D3
R100	E7	R205	*N2	R334	D2	R508	*P2	R678	M4	R908	K7	R1118	J5	R1303	*L4	R1515	F3	R1680	J3	R1928	D2	R2110	A3	R2245	*E5	R2351	*N6	R2511	*F7	R3006	B1	RB1600	J4	TP2200	E5
R101	F7	R206	*M2	R335	D2	R509	*P4	R679	N4	R909	J7	R1119	*K6	R1304	*L4	R1516	F3	R1681	J3	R1929	D3	R2111	*A3	R2246	*E5	R2352	*N6	R2512	*C6	R3007	*B1	RB1601	J4	TP2201	E5
R102	*C6	R207	*M2	R336	*D2	R510	N4	R680	N4	R910	K6	R1120	*K6	R1305	*L4	R1517	G3	R1682	J3	R1930	D2	R2112	A3	R2247	*F5	R2353	*G6	R2513	*C6	R3008	B2	RB1900	*E1	TP2300	N6
R103	E7	R208	*N2	R337	*D2	R511	N4	R681	N4	R912	K7	R1121	*K6	R1306	*L4	R1518	G3	R1683	J3	R1931	D3	R2113	*A3	R2248	*E5	R2354	*G6	R2514	*C6	R3009	*B2	RB2003	*F2	TP2301	N6
R104	F7	R209	*M2	R338	D2	R512	N4	R682	N4	R913	J7	R1122	*K6	R1307	*L4	R1519	F3	R1684	J3	R1932	D3	R2114	B3	R2249	*E5	R2355	G6	R2515	*C5	R3010	B1	RB2100	B3	TP2302	G5
R105	*C6	R210	*N2	R339	D2	R513	N4	R683	*N4	R914	K6	R1123	J6	R1308	L4	R1520	F3	R1685	G3	R1933	D2	R2115	*B3	R2250	*E5	R2401	*C7	R2516	G1	R3011	*B1	RB2101	B3	TP2303	G5
R106	*C6	R212	*M2	R340	*D2	R514	M3	R684	*N4	R916	K6	R1124	J6	R1309	L4	R1521	F3	R1686	G3	R1934	D2	R2116	B3	R2251	*F5	R2402	*C7	R2517	*F7	R3012	*B2	RB2102	B3	TP2401	D7
R107	*B6	R213	N2	R341	*D2	R515	M3	R685	N4	R917	J6	R1125	*J6	R1310	L4	R1522	F2	R1687	G3	R1935	D2	R2117	*B3	R2252	*D5	R2403	*C6	R2518	*F7	R3013	*B1	RB2103	B3	TP2402	D7
R108	*B6	R214	N2	R346	D2	R516	M4	R686	N4	R918	K7	R1126	*J5	R1311	L3	R1523	F2	R1688	G3	R1936	D2	R2118	B3	R2253	*E5	R2404	*B7	R2519	*C6	R3014	*B2	RB2104	*B3	TP2403	D7
R109	*B6	R217	M2	R347	*D2	R517	M4	R687	M3	R919	K6	R1127	*J5	R1312	L3	R1524	G2	R1689	H3	R1937	D2	R2119	*B3	R2254	*E6	R2405	*C6	R2520	*C6	R3015	*B1	RB2105	*B3	TP2404	D7
R110	*C6	R218	M2	R348	D2	R518	*M4	R688	M4	R920	K6	R1128	K5	R1313	L3	R1525	G2	R1690	H3	R1938	D2	R2120	B3	R2255	*E6	R2406	*C6	R2521	*C6	R3016	B2	RB2106	*B3		
R111	*C6	R220	*N2	R349	*D2	R519	*L3	R689	*M3	R921	J6	R1129	K5	R1314	J6	R1526	G3	R1691	G3	R1939	D2	R2121	*B3	R2256	*D5	R2407	*C6	R2522	*C6	R3017	B1	RB2107	*B3	X400	K2
R112	*C6	R221	*M2	R350	*D2	R520	*P3	R690	M3	R922	K7	R1130	K5	R1315	J6	R1527	G2	R1692	G3	R1940	D2	R2122	B3	R2257	*E5	R2408	*C7	R2523	*C6	R3018	B2	RB2108	B3	X401	K4
R113	*B6	R222	*N2	R352	D2	R521	*P3	R691	M3	R923	K6	R1131	K5	R1316	H7	R1528	*F3	R1693	G3	R1941	D2	R2123	*B3	R2258	*D5	R2409	*C7	R2524	*C6	R3019	B1	RB2109	*B3	X402	K3
R114	*B6	R223	*N2	R354	*D2	R522	*N4	R692	P3	R924	*K7	R1132	K5	R1317	H7	R1529	*F3	R1694	G3	R1942	D2	R2124	B3	R2259	*D6	R2410	*E1	R2525	F1	R3020	B2	RB2110	B3	X403	K2
R115	*B6	R224	*M2	R355	D2	R523	*N4	R693	P3	R925	J7	R1133	K5	R1318	H7	R1530	*F3	R1695	J3	R1943	D2	R2125	*B3	R2260	*D6	R2411	*C6	R2526	F1	R3021	B2	RB2111	*B3	X404	D5
R116	D6	R225	*M2	R358	*D2	R524	*N4	R694	P4	R926	K6	R1134	K5	R1321	H6	R1531	*F3	R1696	J3	R1944	D2	R2126	B3	R2261	*E6	R2412	*C6	R2527	G1	R3022	B1	RB2112	C4	X405	D5
R117	D6	R226	*N2	R359	*D2	R525	*N4	R695	*P3	R927	*K7	R1135	K5	R1322	H6	R1532	*G3	R1697	J3	R1945	D2	R2127	*B3	R2262	*D6	R2413	*C6	R2528	G2	R3023	B1	RB2113	C4		
R118	*C6	R227	*N2	R361	*E1	R526	*N4	R696	*P3	R928	*J7	R1136	L6	R1323	H6	R1533	*G2	R1698	J3	R1946	D2	R2128	B3	R2263	*E6	R2414	*C5	R2529	G2	R3024	B2	RB2114	*B4	*:B SIDE	
R119	*C6	R228	*M2	R362	*E1	R527	*N4	R697	P4	R929	J7	R1137	*L6	R1324	H5	R1600	J2	R1699	J3	R1947	D2	R2129	*B3	R2264	*D6	R2415	*C5	R2530	G2	R3025	B2	RB2115	B4		
R120	*C6	R229	*M2	R363	*D1	R528	*N4	R698	P4	R930	K6	R1138	L6	R1325	*H5	R1601	H2	R1700	J3	R1948	D2	R2130	B3	R2265	*E6	R2416	*C5	R2534	*F7	R3026	B1	RB2116	B4		
R121	*B6	R232	*H2	R365	*D1	R529	*N4	R699	M3	R931	*K7	R1139	J5	R1326	*H5	R1602	G3	R1701	J3	R1949	D2	R2131	*B3	R2266	*D5	R2417	*C5	R2535	*F7	R3027	B1	RB2117	B3		
R122	*B6	R233	*H2	R367	*D1	R600	N3	R700	M3	R932	K7	R1140	*L6	R1327	*H6	R1603	J2	R1702	J3	R1950	D2	R2132	B3	R2267	*D5	R2418	*C5	R2536	*F7	R3028	B2	RB2118	B3		
R123	*B6	R234	*K2	R368	*D1	R601	N3	R701	M4	R933	J6	R1141	J5	R1328	M4	R1604	H2	R1703	G3	R1951	D2	R2133	*B3	R2268	*D5	R2419	*C5	R2537	*C6	R3029	B1	RB2200	*F7		
R124	D6	R235	*K2	R369	*D1	R602	N3	R702	M3	R934	J7	R1142	*J6	R1329	M4	R1605	G3	R1704	G3	R1952	D2	R2134	*C2	R2269	*D5	R2420	*C5	R2538	*C6	R3030	B2	RB2201	*F7		
R125	D6	R238	H2	R370	*D1	R603	M3	R703	*M4	R935	J6	R1143	*J6	R1330	M4	R1606	J3	R1705	G3	R1953	D2	R2135	*C2	R2270	*E6	R2421	*C5	R2539	*C6	R3031	B1	RB2202	F7		
R126	D5	R240	*H2	R373	*D1	R604	N3	R704	M4	R936	*J6	R1144	J6	R1331	M4	R1607	J3	R1706	G3	R1954	D2	R2136	*C2	R2271	*F6	R2422	*C5	R2540	*F2	R3032	B2	RB2401	*B7		
R127	D6	R241	K2	R374	*D1	R605	N3	R705	M4	R937	*J6	R1145	J6	R1332	L4	R1608	J3

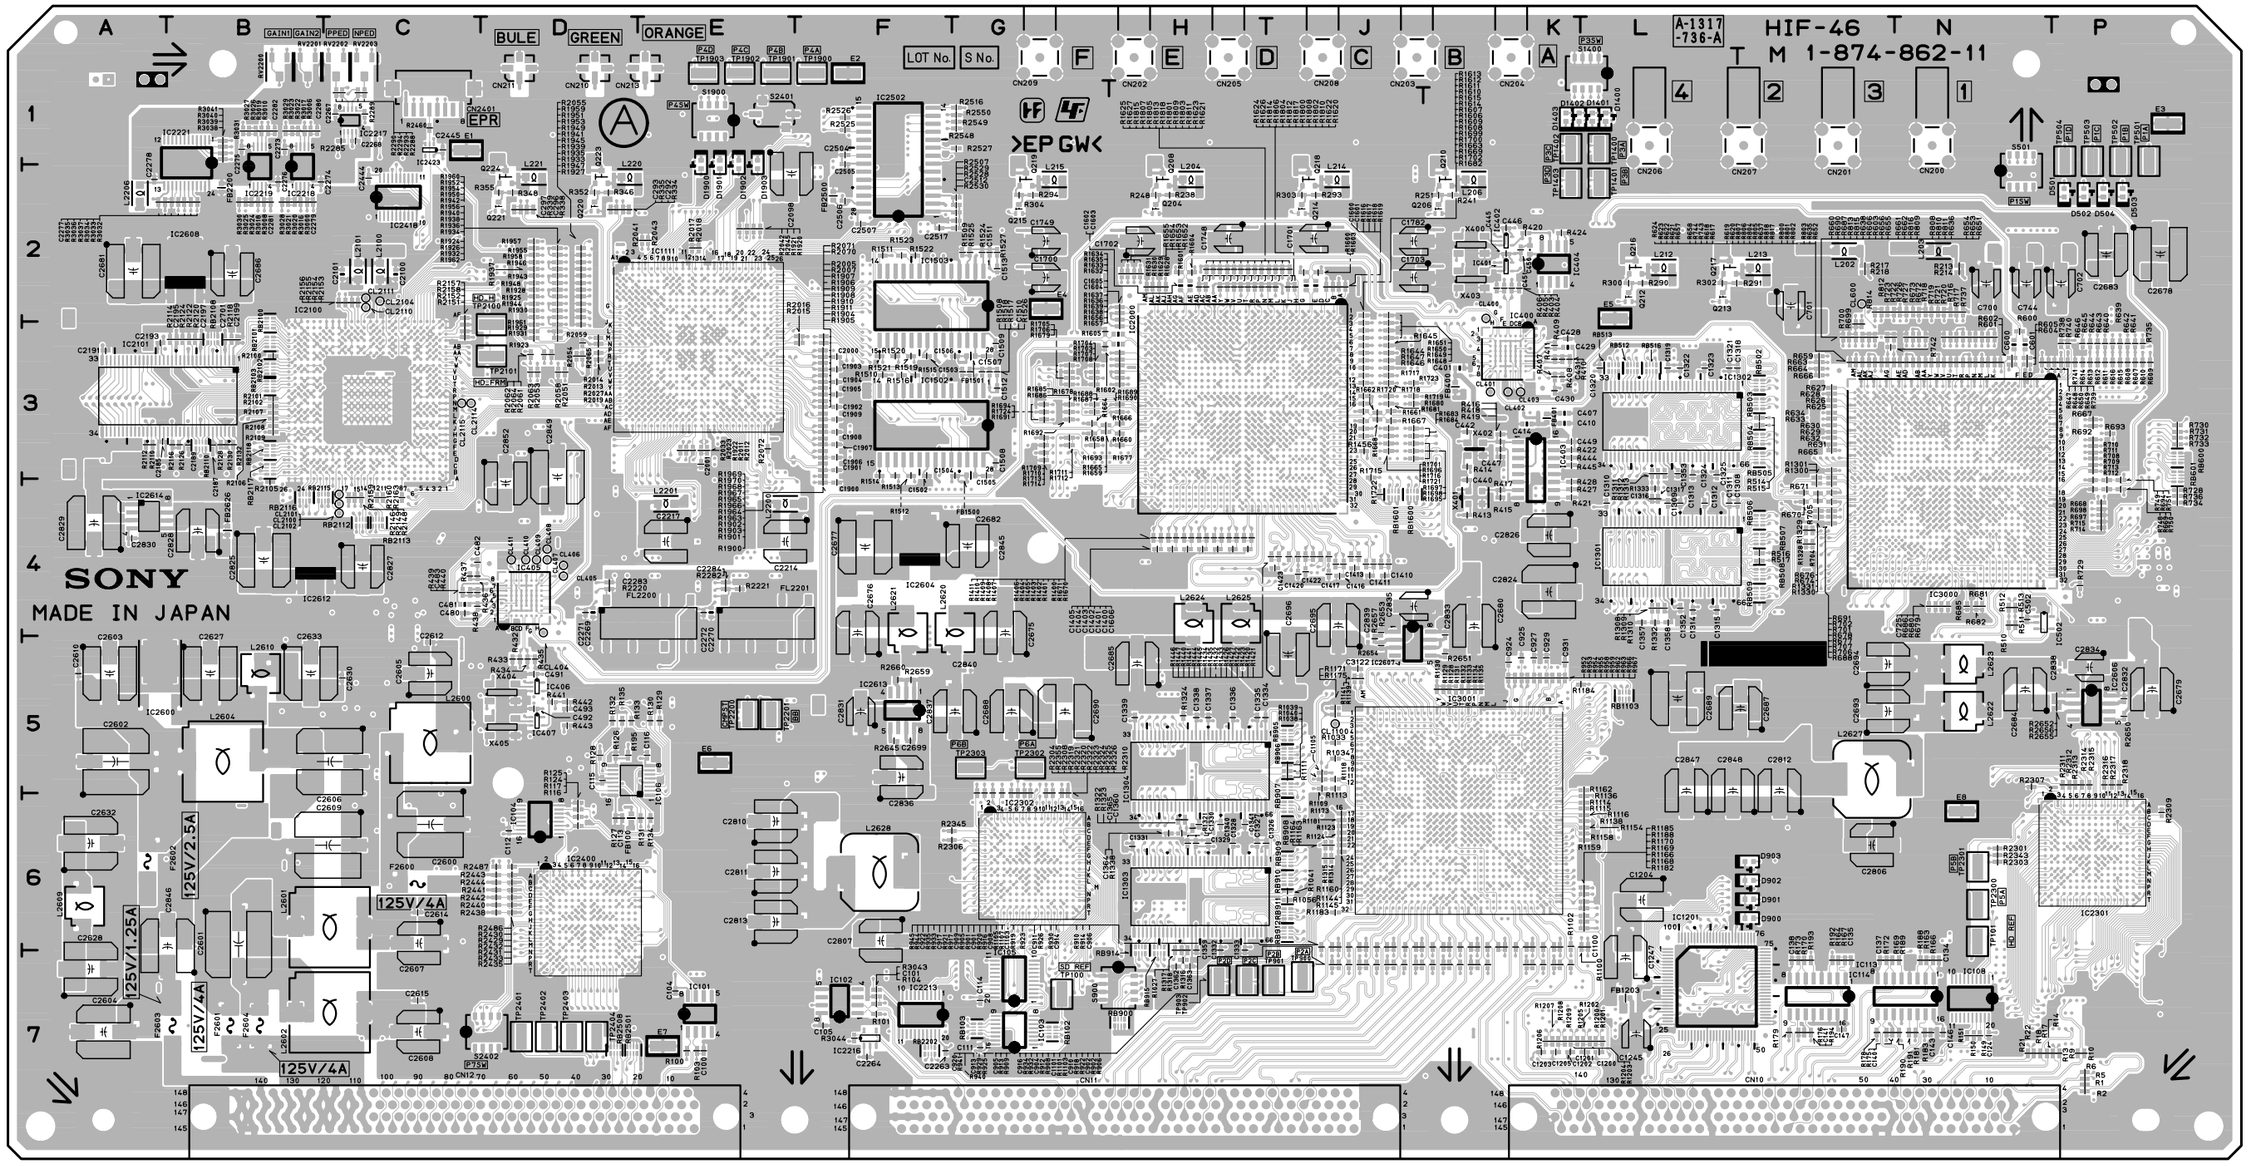

HIF-46 -A SIDE-
SUFFIX: -11

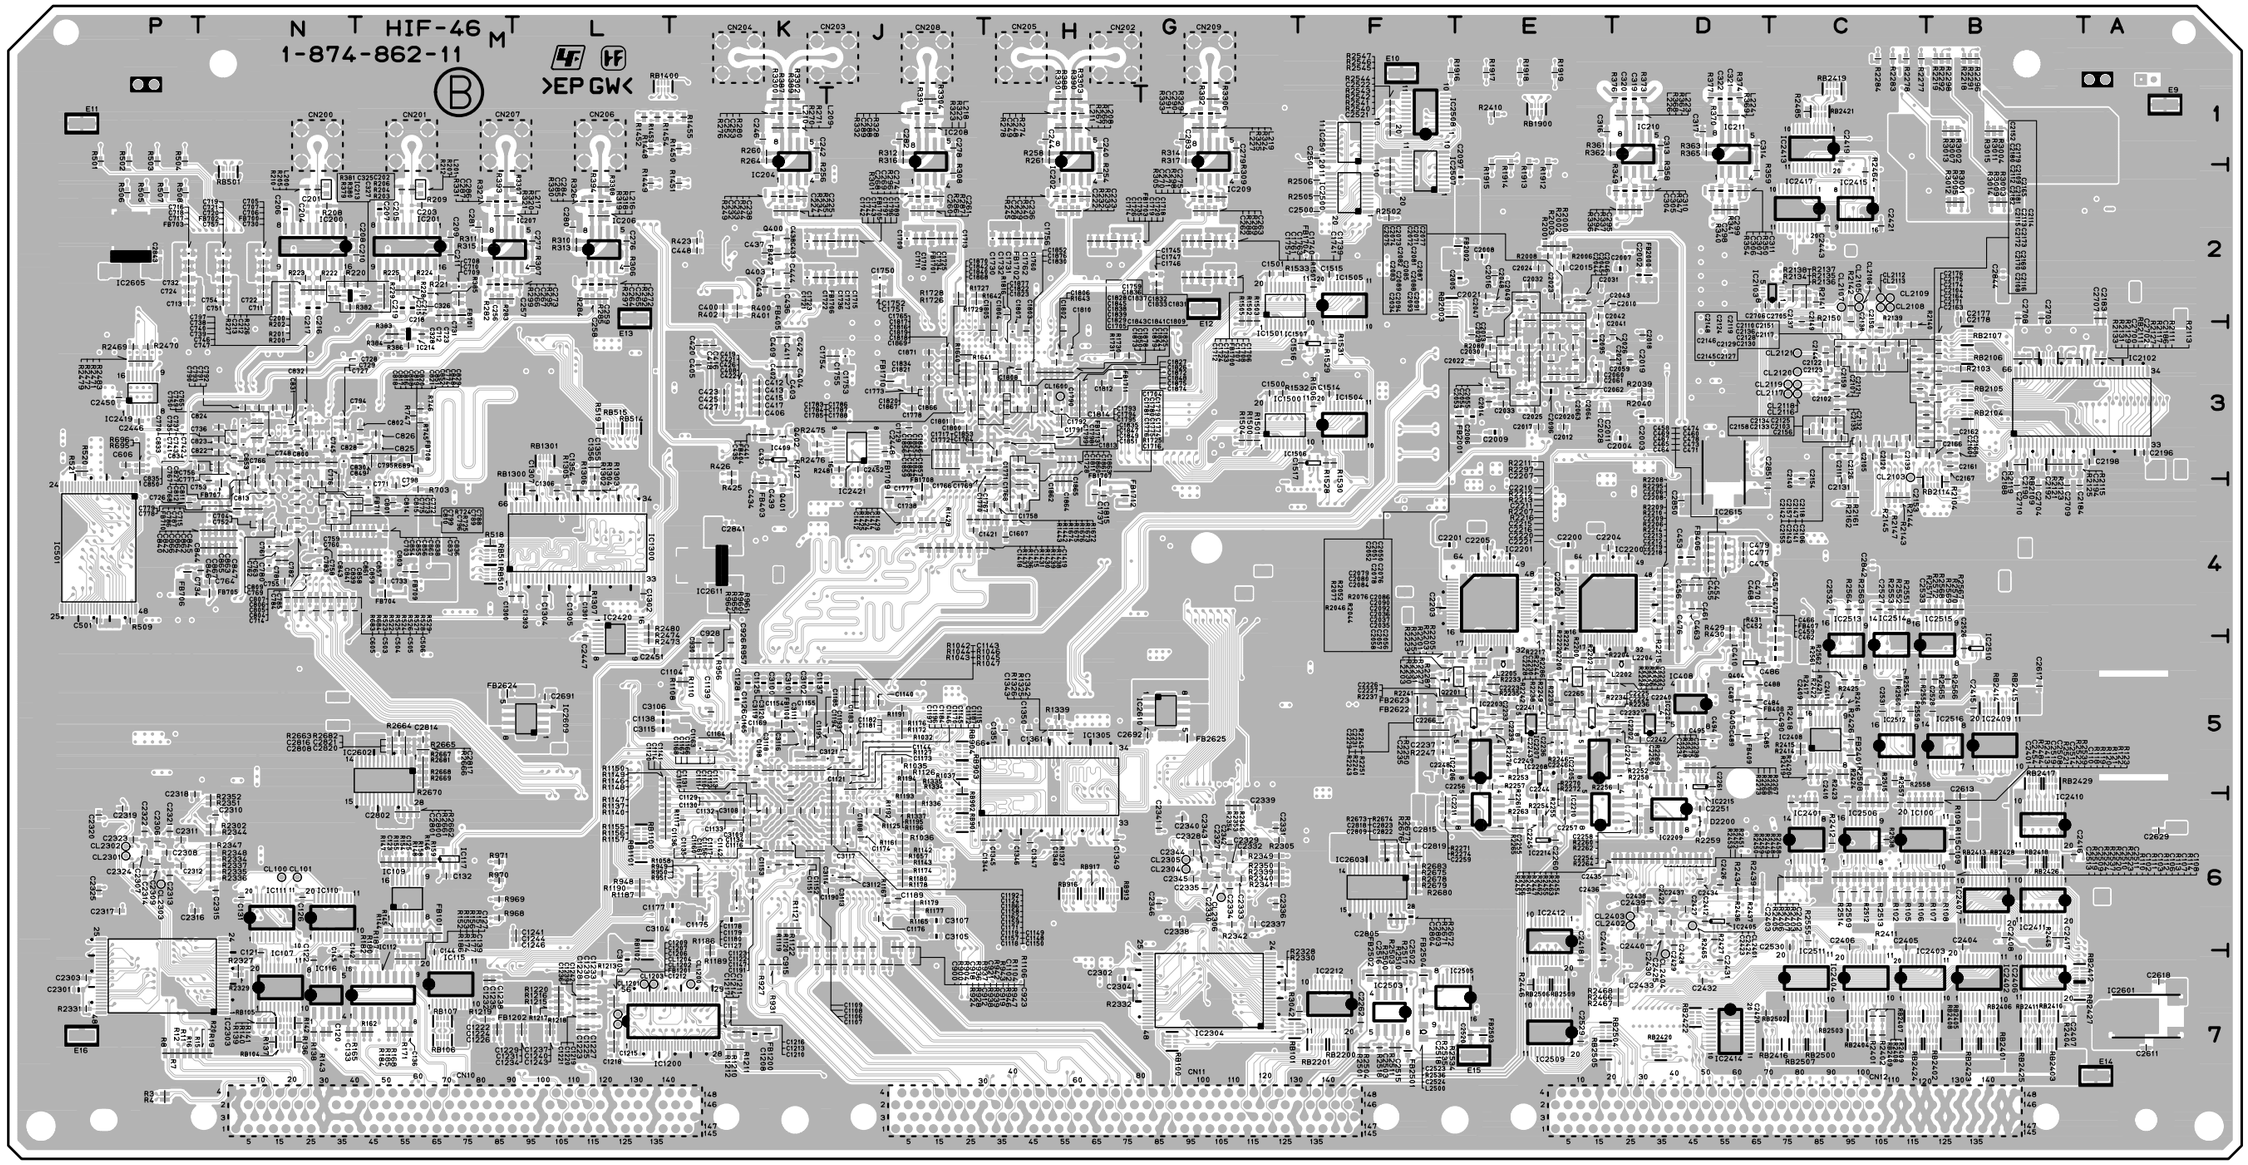

HIF-46 -B SIDE-
SUFFIX: -11

HIF-46 (1-874-862-12)

C100	E7	C275	*G2	C438	*K2	C728	*N3	C827	*N3	C1128	*K5	C1228	*L7	C1417	J4	C1766	*J3	C1865	*H4	C2083	*E3	C2183	*A2	C2307	*P6	C2511	*C6	C2819	*F6	CL2115	C3	FB708	*M3	IC1200	*L7
C101	F7	C276	*L2	C439	*K4	C729	*N3	C828	*M3	C1129	*K6	C1229	*L7	C1418	*J4	C1767	*H4	C1866	*J3	C2084	*E3	C2184	*B4	C2308	*P6	C2512	G2	C2820	*M5	CL2116	*C3	FB709	*M4	IC1201	L7
C102	*C6	C277	*L2	C440	K4	C730	*N2	C829	*M3	C1130	*K6	C1230	*L7	C1419	*H4	C1768	*H4	C1867	*J3	C2085	*E3	C2185	A3	C2309	*P6	C2513	*C6	C2821	*M5	CL2117	*C3	FB710	*N4	IC1300	*L4
C103	*C6	C278	*J1	C441	*K3	C731	*M2	C830	*M3	C1131	*K6	C1231	*L7	C1420	J4	C1769	*J3	C1868	*J3	C2086	*E3	C2186	*A3	C2310	*N6	C2514	*C6	C2822	*F6	CL2118	*C3	FB711	*M4	IC1301	L4
C104	E7	C279	*G1	C442	K3	C732	*P2	C831	*N3	C1132	*K6	C1232	*M7	C1421	*J4	C1770	*H3	C1869	*J3	C2087	*E3	C2187	B3	C2311	*P6	C2515	*F7	C2823	*F6	CL2119	*C3	FB1100	*K5	IC1302	L3
C105	F7	C280	*L2	C443	*K2	C733	*M4	C832	*N3	C1133	*K6	C1233	*L7	C1422	J4	C1771	*H3	C1870	*J3	C2088	*E3	C2188	*B3	C2312	*P6	C2516	*F7	C2824	K4	CL2120	*C3	FB1200	*K7	IC1303	H6
C106	*B6	C281	*M2	C444	*K2	C734	*N4	C833	*N3	C1134	*K6	C1234	*L7	C1423	J4	C1772	*J3	C1871	*J3	C2089	*E3	C2189	B3	C2313	*P6	C2517	F2	C2825	B4	CL2121	*C3	FB1201	*L7	IC1304	H5
C107	*B6	C282	*J1	C445	K2	C735	*N3	C834	*N3	C1135	*K6	C1235	*M7	C1500	*G3	C1773	*J3	C1872	*H3	C2090	*E3	C2190	*B3	C2314	*P6	C2518	*F7	C2826	K4	CL2301	*P6	FB1202	*L7	IC1305	*H5
C108	*B6	C283	*G1	C446	K2	C736	*N3	C835	*N3	C1136	*K6	C1236	*L7	C1501	*G2	C1774	*H4	C1873	*H3	C2091	*E3	C2191	A3	C2315	*N6	C2519	*C6	C2827	C4	CL2302	*P6	FB1203	L7	IC1500	*G3
C109	*B6	C284	*L2	C448	*K3	C737	*N3	C836	*M4	C1137	*J5	C1237	*L7	C1502	F3	C1775	*H4	C1874	*H3	C2092	*E3	C2192	*B3	C2316	*P6	C2520	*E7	C2828	B4	CL2303	*P6	FB1500	G3	IC1501	*G2
C110	*C6	C285	*L2	C449	K3	C738	*N3	C837	*M4	C1138	*L5	C1238	*M7	C1503	F3	C1776	*H4	C1875	*H3	C2093	*E3	C2193	A3	C2317	*P6	C2521	*F2	C2829	A4	CL2304	*G6	FB1501	G3	IC1502	G3
C111	G7	C286	*M2	C450	K2	C739	*N3	C838	*M4	C1139	*K5	C1239	*L7	C1504	G3	C1777	*J4	C1876	*H3	C2094	*E3	C2194	*B3	C2318	*P6	C2522	*F1	C2830	A4	CL2305	*G6	FB1700	*G2	IC1503	G2
C112	D6	C287	*M2	C451	K2	C740	*N3	C839	*N4	C1140	*J5	C1240	*L7	C1505	G3	C1778	*J3	C1877	*H3	C2095	*E3	C2195	B3	C2319	*P6	C2523	*F7	C2831	F5	CL2306	*G6	FB1701	*J2	IC1504	*F3
C113	D6	C288	*J1	C452	*D5	C741	*N3	C840	*N4	C1141	*K5	C1241	*L6	C1506	G3	C1779	*H3	C1878	*H3	C2096	*E3	C2196	*A3	C2320	*P6	C2524	*F7	C2832	P5	CL2401	*D6	FB1702	*H2	IC1505	*F3
C114	G7	C289	*J1	C453	*D4	C742	*N3	C841	*N4	C1142	*K6	C1242	*L7	C1507	G3	C1780	*H3	C1879	*H3	C2097	*E2	C2197	B3	C2321	*P6	C2526	*B5	C2833	K4	CL2402	*D6	FB1703	*H2	IC1506	*F3
C115	D5	C290	*G1	C454	*D4	C743	*N3	C842	*N4	C1143	*J5	C1243	*L7	C1508	G3	C1781	*H3	C1900	F4	C2098	E2	C2198	*A3	C2322	*P6	C2527	*C4	C2834	P5	CL2403	*D6	FB1704	*G2	IC1507	*F3
C116	E5	C291	*G1	C455	*D4	C744	N2	C843	*N4	C1144	*J5	C1244	*L6	C1509	G3	C1782	J2	C1901	F3	C2100	C2	C2199	B3	C2323	*P6	C2528	*B5	C2835	J4	CL2404	*D7	FB1705	*J2	IC2000	H3
C120	*N7	C292	D2	C456	*D4	C745	*N3	C844	*N4	C1145	*K5	C1245	L7	C1510	G3	C1783	*J3	C1902	F3	C2101	C2	C2200	*E4	C2324	*P6	C2529	*E7	C2836	F5			FB1706	*J2	IC2100	C3
C121	*N7	C293	D2	C457	*C4	C746	*N3	C845	*N4	C1146	*K5	C1246	*L6	C1511	G2	C1784	*J3	C1903	F3	C2102	*C3	C2201	*F4	C2325	*P6	C2530	*C6	C2837	G5	CN10	M7	FB1707	*H4	IC2101	B3
C122	*N7	C294	*D2	C458	*D4	C747	*N3	C846	*N4	C1147	*K6	C1247	L7	C1512	G3	C1785	*J3	C1904	F3	C2103	*C3	C2202	*E4	C2327	*G6	C2531	*C5	C2838	P5	CN11	H7	FB1708	*J4	IC2102	*B3
C123	*M6	C295	*D2	C459	*C5	C748	*N3	C847	*N4	C1148	*J6	C1300	*M4	C1513	G2	C1786	*J3	C1905	F3	C2104	*B3	C2203	*F4	C2328	*G6	C2532	*C4	C2839	J5	CN12	C7	FB1709	*J4	IC2103	*C2
C124	N7	C296	D2	C460	*D4	C749	*N3	C848	*N3	C1149	*J6	C1301	*L4	C1514	*F3	C1787	*J3	C1906	F3	C2105	*C3	C2204	*E4	C2329	*G6	C2533	*C4	C2840	G5	CN200	N1	FB1710	*J3	IC2200	*E4
C125	*M6	C297	D2	C461	*D4	C750	*N3	C849	*M3	C1150	*J6	C1302	*L4	C1515	*F2	C1788	*J3	C1907	F3	C2106	*C3	C2205	*E4	C2330	*G6	C2600	C6	C2841	*K4	CN201	M1	FB1711	*H3	IC2201	*E4
C126	*N6	C298	*D2	C462	*C5	C751	*N2	C850	*N3	C1151	*K6	C1303	*L4	C1516	*F3	C1789	*J2	C1908	F3	C2107	*C3	C2206	*D4	C2331	*G6	C2601	B6	C2842	*C4	CN202	H1	FB1712	*H4	IC2202	*E5
C127	*M6	C299	*D2	C463	*D4	C752	*N4	C851	*N3	C1152	*K6	C1304	*L4	C1517	*F3	C1790	*H3	C1909	F3	C2108	*C3	C2207	*E4	C2332	*G6	C2602	A5	C2843	*P2	CN203	J1	FB1713	*H3	IC2203	*E5
C131	*N6	C304	*D2	C464	*D4	C753	*N4	C852	*N3	C1153	*K6	C1305	*L4	C1600	J2	C1791	*H3	C2000	F3	C2109	*C3	C2208	*D4	C2333	*G6	C2603	A5	C2844	*B2	CN204	K1	FB2000	*D2	IC2204	*D5
C132	*M6	C305	*D2	C465	*D4	C754	*N2	C853	*N3	C1154	*K5	C1306	*L4	C1601	J2	C1792	*H3	C2001	E3	C2110	*C3	C2209	*D4	C2334	*G6	C2604	A7	C2845	G4	CN205	H1	FB2001	*E3	IC2205	*D5
C133	*N7	C306	*D2	C466	*C4	C755	*N4	C854	*N4	C1155	*K5	C1307	*L4	C1602	H2	C1793	*H3	C2002	*D2	C2111	*C3	C2210	*E4	C2335	*G6	C2605	C5	C2846	B6	CN206	L1	FB2002	*E2	IC2206	*E5
C134	N7	C307	*D2	C467	*D4	C756	*N3	C855	*N4	C1156	*K6	C1308	L4	C1603	H2	C1794	*H3	C2003	*D3	C2112	*C3	C2211	*E4	C2336	*G6	C2606	C5	C2847	L5	CN207	M1	FB2200	B2	IC2207	*E5
C135	M7	C310	*D2	C468	*D4	C757	*N2	C856	*N4	C1157	*J6	C1309	L4	C1604	H3	C1795	*H3	C2004	*D3	C2113	*B3	C2212	*D4	C2337	*G6	C2607	C6	C2848	L5	CN208	J1	FB2401	*C5	IC2208	*E5
C136	*M7	C311	*D2	C469	*D4	C758	*N4	C857	*M4	C1158	*J6	C1310	L4	C1605	H3	C1796	*J2	C2005	*E2	C2114	*B3	C2213	*D4	C2338	*G6	C2608	C7	C2849	D3	CN209	G1	FB2500	F2	IC2209	*D5
C137	M7	C313	*D1	C470	*D4	C759	*N4	C858	*M4	C1159	*J6	C1311	L4	C1606	H4	C1797	*J2	C2006	*E3	C2115	*C3	C2214	E4	C2339	*G6	C2609	C6	C2850	*D4	CN210	D1	FB2501	*F7	IC2210	*D6
C138	M7	C314	*D1	C471	*D4	C760	*N4	C859	*M4	C1160	*K6	C1312	L4	C1607	*H4	C1798	*H3	C2007	*D2	C2116	*B3	C2215	*E4	C2340	*G6	C2610	A5	C2851	*D4	CN211	D1	FB2502	*F7	IC2211	*E6
C139	*M7	C316	*E1	C472	*C4	C761	*N4	C860	*M4	C1161	*K6	C1313	L4	C1700	G2	C1799	*H3	C2008	*E2	C2117	*C3	C2216	*E4	C2341	*G6	C2611	*A7	C2852	D4	CN213	E1	FB2503	*E7	IC2212	*F7
C140	M7	C317	*D1	C473	*D4	C762	*N4	C861	*M4	C1162	*J6	C1314	L4	C1701	J2	C1800	*J3	C2009	*E3	C2118	*C3	C2217	E4	C2342	*G6	C2612	C5	C3100	*K5	CN2401	C1	FB2504	*F7	IC2213	F7
C141	M7	C319	*D1	C474	*D4	C763	*N4	C862	*N4	C1163	*K5	C1315	L4	C1702	H2	C1801	*J3	C2010	*D2	C2119	*C3	C2218	*D5	C2343	*G6	C2613	*B6	C3101	*K5			FB2622	*F5	IC2214	*E6
C142	*M7	C320	*D1	C475	*D4	C764	*N4	C863	*N4	C1164	*K5	C1316	L4	C1703	J2	C1802	*H3	C2011	*E3	C2120	*C3	C2219	*D5	C2344	*G6	C2614	C6	C3102	*K5	D501	P2	FB2623	*F5	IC2215	*D5
C143	N7	C321	*D1	C476	*D4	C765	*N3	C864	*N4	C1165	*K5	C1317	L4	C1704	*H3	C1803	*H3	C2012	*E3	C2121	*C3	C2220	*E5	C2345	*G6	C2615	C7	C3103	*L7	D502	P2	FB2624	*M5	IC2216	F7
C144	*M7	C322	*D1	C477	*D4	C766	*N3	C865	*N4	C1166	*K5	C1318	L3	C1705	*J3	C1804	*H3	C2013	*E3	C2122	*C3	C2221	*E5	C2346	*G6	C2617	*B5	C3104	*K6	D503	P2	FB2625	*G5	IC2217	C1
C145	*N7	C325	*M2	C478	*D4	C767	*N3	C866	*N4	C1167	*K5	C1319	L3	C1706	*G2	C1805	*J3	C2014	*E3	C2123	*C3	C2222	*D5	C2401	*C6	C2618	*A7	C3105	*J6	D504	P2	FB2626	B4	IC2218	B2
C146	N7	C326	*M2	C479	*D4	C768	*N4	C867	*N4	C1168	*K5	C1320	L3	C1707	*G2	C1806	*H3	C2015	*E2	C2124	*C3	C2223	*E5	C2402	*C6	C2627	B5	C3106	*L5	D900	M6			IC2219	B2
C147	M7	C327	*M2	C480	C4	C769	*N4	C900	*K6	C1169	*K5	C1321	L3	C1708	*G2	C1807	*H3	C2016	*E2	C2125	*C3	C2224	*E5	C2403	*C6	C2628	A7	C3107	*J6	D901	M6	FL2200	E4	IC2221	B1
C200	*N2	C328	*M3	C481	C4	C770	*N3	C901	J6	C1170	*K5	C1322	L3	C1709	*J2	C1808	*H3	C2017	*E3	C2126	*C3	C2225	*E5	C2404	*B6	C2629	*A6	C3108	*K6	D902	M6	FL2201	E4	IC2301	P6
C201	*N2	C329	L2	C482	C4	C771	*M4	C902	K7	C1171	*J6	C1323	L3	C1710	*J2	C1809	*H3	C2018	*D3	C2127	*C3	C2226	*E5	C2405	*C6	C2630	C5	C3109	*K6	D903	M6			IC2302	G6
C202	*M2	C330	L2	C483	C4	C772	*M4	C904	K7	C1172	*K5	C1324	L3	C1711	*J2	C1810	*H3	C2019	*D3	C2128	*C3	C2227	*E5	C2406	*C6	C2632	A6	C3110	*K5	D1400	L1	IC100	*C6	IC2303	*P7
C203	*M2	C331	J2	C484	*D5	C773	*N4	C905	J7	C1173	*J5	C1325	L3	C1712	*G2	C1811	*H3	C2020	*E3	C2129	*C3	C2228	*E5	C2407	*B7	C2633	B5	C3111	*K5	D1401	L1	IC101	E7	IC2304	*G7
C204	*N2	C332	N2	C485	*D5	C774	*N3	C906	K6	C1174	*J6	C1326	H6	C1713	*J2	C1812	*H3	C2021	*E2	C2130	*C3	C2229	*F5	C2408	*B6	C2675	G4	C3112	*J6	D1402	K1	IC102	F7	IC2400	D6
C205	*M2	C333	M2	C486	*D5	C775	*N4	C908	K6	C1175	*K6	C1327	H6	C1714	*H2	C1813	*H3	C2022	*E3	C2131	*C4	C2230	*E5	C2409	*C5	C2676	F4	C3113	*J6	D1403	K1	IC103	G7	IC2401	*C6
C206	*N2	C334	M2	C487	*D5	C776	*N3	C909	J6	C1176	*J6	C1328	H6	C1715	*J2	C1814	*H3	C2023	*E2	C2132	*C3	C2231	*F5	C2410	*C5	C2677	F4	C3114	*J6	D1900	E2	IC104	D6	IC2402	*B7
C207	*M2	C335	L2	C488	*D5	C777	*N3	C910	K7	C1177	*K6	C1329	H6	C1716	*H4	C1815	*H4	C2024	*E2	C2133	*C3	C2232	*D5	C2411	*C5	C2678	P2	C3115	*L5	D1901	E2	IC105	G7	IC2403	*C7
C208	*M2	C336	K2	C489	*D5	C778	*N4	C911	K6	C1178	*K6	C1330	H6	C1717	*J3	C1816	*J3	C2025	*E3	C2134	*C3	C2233	*E5	C2412	*D6	C2679	P5	C3116	*K5	D1902	E2	IC106	D5	IC2404	*C7
C209	*M2	C337	J2	C490	*D5	C779	*N4	C912	*J7	C1179	*K6	C1331	H6	C1718	*H2	C1817	*J3	C2026	*D3	C2135	*C3	C2234	*E5	C2415	*B5	C2680	K4	C3117	*J6	D1903	E2	IC107	*N7	IC2405	*D6
C210	*M2	C338	H2	C491	D5	C780	*N4	C913	J7	C1180	*K6	C1332	H7	C1719	*H2	C1818	*J3	C2027	*D3	C2136	*C3	C2235	*E5	C2416	*B6	C2681	A2	C3118	*K5	D2200	*D6	IC108	N7	IC2406	*B7
C211	*M2	C339	G2	C492	D5	C781	*N4	C914	K6	C1181	*J5	C1333	H7	C1720	*H2	C1819	*J3	C2028	*E3	C2137	*C3	C2236	*E5	C2417	*B6	C2682	G4	C3119	*K5			IC109	*M6	IC2407	*B6
C212	*N2	C340	D2	C493	D5	C782	*N4	C915	*K7	C1182	*J5	C1334	H5	C1721	*K2	C1820	*J3	C2029	*E3	C2138	*C3	C2237	*F5	C2418	*E7	C2683	P2	C3120	*K5	E1	C1	IC110	*N6	IC2408	*C5
C213	*N2	C341	D2	C494	*D5	C783	*N4	C916	J7	C1183	*J5	C1335	H5	C1722	*K2	C1821	*J3	C2030	*E3	C2139	*C3	C2238	*D5	C2419	*C1	C2684	N5	C3121	*J5	E2	F1	IC111	*N6	IC2409	*B5
C214	*M2	C342	J2	C495	*D5	C784	*N4	C917	J6	C1184	*K5	C1336	H5	C1723	*K2	C1822	*H3	C2031	*E2	C2140	*C4	C2239	*E5	C2420	*D7	C2685	H5	C3122	J5	E3	P1	IC112	*M7	IC2410	*B6
C215	*M2	C343	H2	C496	*K3	C785	*N4	C918	*J6	C1185	*J5	C1337	H5	C1724	*G2	C1823	*H3	C2032	*E2	C2141	*C3	C2240	*D5	C2421	*C2	C2686	B2			E4	G2	IC113	N7	IC2411	*B6
C216	*N2	C344	G2	C497	K2	C786	*N4	C919	*J7	C1186	*J6	C1338	H5	C1725	*J2	C1824	*H3	C2033	*E3	C2142	*C3	C2241	*E5	C2422	*D6	C2687	M5	CL100	*N6	E5	L2	IC114	M7	IC2412	*E6
C217	*N2	C345	D2	C498	K2	C787	*N4	C920	J7	C1187	*K5	C1339	H5	C1726	*H2	C1825	*H3	C2034	*E3	C2143	*C3	C2242	*D5	C2423	*D6	C2688	G5	CL101	*N6	E6	E5	IC115	*M7	IC2413	*C1
C218	*M2	C346	C2	C499	K2	C788	*M4	C921	*J6	C1188	*J6	C1340	H6	C1727	*J2	C1826	*H3	C2035	*E3	C2144	*C3	C2243	*E5	C2424	*D6	C2689	L5	CL400	K2	E7	E7	IC116	*N7	IC2414	*D7
C219	*M2	C400	*K2	C501	*P4	C789	*N4	C922	J6	C1189	*J6	C1341	H6	C1728	*H3	C1827	*H3	C2036	*E3	C2145	*C3	C2244	*E6	C2425	*D6	C2690	G5	CL401	K3	E8	N6	IC117	*M6	IC2415	*C2
C222	*H2	C401	K3	C502	N4	C790	*N3	C923	*J7	C1190	*J6	C1342	*H5	C1729	*J3	C1828	*H3	C2037	*E3	C2146	*C3	C2245	*E6	C2426	*D6	C2691	*L5	CL402	K3	E9	*A1	IC200	*N2	IC2417	*C2
C223	*H2	C402	*K3	C503	*N4	C791	*N3	C924	K5	C1191	*K6	C1343	*H5	C1730	*H2	C1829	*J3	C2041	*E3	C2147	*C3	C2246	*E5	C2427	*D6	C2692	*G5	CL403	K3	E10	*F1	IC201	*M2	IC2418	C2
C224	*K2	C403	*K3	C504	*N4	C792	*N3	C925	K5	C1192	*J5	C1344	*H6	C1731	*H2	C1830	*H3	C2042	*E2	C2148	*C3	C2247	*D5	C2428	*D6	C2693	M5	CL404	D4	E11	*P1	IC202	*H2	IC2419	*P3
C225	*K2	C404	*K3	C505	*N4	C793	*N3	C926	*K5	C1193	*J5	C1345	*H6	C1732	*H2	C1831	*H3	C2043	*E2	C2149	*C3	C2248	*F5	C2429	*D6	C2694	M5	CL405	D4	E12	*G2	IC204	*K2	IC2420	*L5
C228	*H2	C405	*K3	C506	*N4	C794	*M3	C927	K5	C1194	*J5	C1346	*H6	C1733	*G2	C1832	*H3	C2044	*E2	C2150	*C3	C2249	*E5	C2430	*D6	C2695	J4	CL406	D4	E13	*L2	IC206	*L2	IC2421	*J3
C229	*H2	C406	*K3	C600	N3	C795	*M3	C928	*K5	C1195	*J5	C1347	*H6	C1734	*J2	C1833	*H3	C2045	*E2	C2151	*C3	C2250	*D5	C2431	*D7	C2696	J5	CL407	D4	E14	*A7	IC207	*M2	IC2423	C1
C232	*K2	C407	K3	C601	N3	C796	*N4	C929	K5	C1196	*K5	C1348	*H6	C1735	*H2	C1834	*J3	C2046	*E2	C2152	*C3	C2251	*D6	C2432	*D7	C2699	F5	CL408	D4	E15	*E7	IC208	*J2	IC2500	*F2
C233	*K2	C408	*K3	C605	*N4	C797	*N3	C930	*K5	C1197	*K5	C1349	*H6	C1736	*J2	C1835	*H3	C2047	*E2	C2153	*C3	C2254	*D6	C2433	*D7	C2700	*B3	CL409	D4	E16	*P7	IC209	*G2	IC2501	*F1
C236	*H2	C409	*K3	C606	*P3	C798	*M4	C931	K5	C1198	*K5	C1350	*H5	C1737	*H4	C1836	*H3	C2048	*E2	C2154	*C4	C2255	*E6	C2434	*D6	C2701	B3	CL410	D4	E17	G4	IC210	*D2	IC2502	F2
C238	*K2	C410	K3	C700	N2	C799	*N4	C1100	L6	C1200	L7	C1351	*H5	C1738	*J4	C1837	*H3	C2049	*E2	C2155	*C3	C2256	*E5	C2435	*D6	C2702	*B3	CL411	D4	E18	L6	IC211	*D2	IC2503	*F7
C240	*H1	C411	*K3	C701	M2	C800	*N3	C1101	K7	C1201	L7	C1352	L4	C1739	*G2	C1838	*H3	C2050	*E2	C2156	*C3	C2257	*E6	C2436	*E6	C2703	*B2	CL412	K2			IC213	*N2	IC2505	*E7
C242	*K1	C412	*K3	C702	P2	C801	*M4	C1102	*J6	C1202	K7	C1353	L3	C1740	*G2	C1839	*H3	C2051	*E2	C2157	*C3	C2258	*D6	C2437	*D6	C2704	*B4	CL413	K2	F2600	C6	IC214	*M3	IC2506	*C6
C244	*H1	C413	*K3	C703	*N4	C802	*M3	C1103	K6	C1203	K7	C1354	*L4	C1741	*G2	C1840	*J3	C2052	*E2	C2158	*C3	C2259	*F6	C2438	*D6	C2705	*C2	CL414	K2	F2601	B7	IC215	L2	IC2507	*F2
C246	*K1	C414	K3	C704	*N4	C803	*M4	C1104	*K5	C1204	L6	C1355	*L3	C1742	*K2	C1841	*H3	C2053	*E3	C2159	*C3	C2260	*E6	C2439	*D6	C2706	*D2	CL415	K2	F2602	A6	IC216	L2	IC2508	*F1
C248	*H1	C415	*K3	C705	*N2	C804	*N4	C1105	J5	C1205	K7	C1356	*L3	C1743	*K2	C1842	*J3	C2054	*E3	C2160	*B3	C2261	*D5	C2440	*D6	C2707	*A2	CL600	M2	F2603	B7	IC217	J2	IC2509	*E7
C249	*H1	C416	*K3	C706	*N2	C805	*N4	C1106	*K6	C1206	*L7	C1357	L4	C1744	*K2	C1843	*H3	C2055	*E3	C2161	*B3	C2262	*F7	C2441	*E7	C2708	*B2	CL1100	J5	F2604	B7	IC218	J2	IC2510	*B5
C252	*K1	C417	*K3	C707	*N2	C806	*N4	C1107	*K6	C1207	*L7	C1358	L4	C1745	*G2	C1844	*J3	C2056	*E3	C2162	*B3	C2263	F7	C2443	*C2	C2709	*B4	CL1200	*K7			IC219	H2	IC2511	*C7
C253	*K1	C418	*K3	C708	*M2	C807	*N3	C1108	*K6	C1208	*K7	C1359	H7	C1746	*G2	C1845	*H3	C2057	*E3	C2163	*B3	C2264	F7	C2444	C2	C2710	*B4	CL1201	*L7	FB100	D6	IC220	G2	IC2512	*C5
C256	*M2	C419	*K3	C709	*M2	C808	*N3	C1109	*K5	C1209	*L7	C1360	H6	C1747	*G2	C1846	*J3	C2058	*E3	C2164	*B3	C2265	*E5	C2445	C1	C2800	*M6	CL1202	*L7	FB101	*M6	IC221	D2	IC2513	*C5
C257	*M2	C420	*K3	C710	*M2	C809	*N4	C1110	*K6	C1210	*K7	C1361	*H5	C1748	H2	C1847	*H3	C2059	*E3	C2165	*B3	C2266	*F5	C2446	*P3	C2801	*M6	CL1203	*L7	FB400	K3	IC222	C2	IC2514	*C5
C258	*L2	C421	*K3	C711	*N2	C810	*N4	C1111	*K6	C1211	*K7	C1362	H7	C1749	G2	C1848	*H3	C2060	*E3	C2166	*B3	C2267	C1	C2447	*L5	C2802	*M6	CL1204	*L7	FB401	K3	IC400	K3	IC2515	*C5
C259	*L2	C422	*K3	C712	*M2	C811	*N4	C1112	*K6	C1212	*L7	C1363	H7	C1750	*J2	C1849	*H3	C2061	*E3	C2167	*B3	C2268	C1	C2448	*J3	C2803	*F6	CL1600	*H3	FB402	*K2	IC401	K2	IC2516	*B5
C260	*J2	C423	*K3	C713	*P2	C812	*N4	C1113	*K6	C1213	*K7	C1364	H6	C1751	*J2	C1850	*H3	C2062	*E3	C2168	*B3	C2269	D4	C2450	*P3	C2804	*F6	CL2100	C4	FB403	*K4	IC402	K2	IC2600	A5
C261	*J2	C424	*K3	C714	*N4	C813	*N4	C1114	*K5	C1214	*K7	C1365	H6	C1752	*J2	C1851	*H3	C2063	*E3	C2169	*B3	C2270	E4	C2451	*L5	C2805	*F6	CL2101	C4	FB404	*K3	IC404	K2	IC2601	*A7
C262	*G2	C425	*K3	C715	*N4	C814	*N4	C1115	*K5	C1215	*L7	C1400	H4	C1753	*J3	C1852	*H3	C2064	*E3	C2170	*C3	C2271	D4	C2452	*J3	C2806	M6	CL2102	C4	FB405	*K2	IC405	D4	IC2602	*M5
C263	*G2	C426	*K3	C716	*P2	C815	*N4	C1116	*K6	C1216	*K7	C1401	H4	C1754	*J3	C1853	*H3	C2071	*E2	C2171	*B3	C2272	E4	C2454	*C6	C2807	F6	CL2103	*C3	FB406	*D4	IC406	D5	IC2603	*F6
C264	*L2	C427	*K3	C717	*P2	C816	*N3	C1117	*K6	C1217	*K7	C1402	H4	C1755	*J3	C1854	*J3	C2072	*E2	C2172	*C3	C2273	B1	C2500	*F2	C2808	*M5	CL2104	C2	FB407	*C5	IC407	D5	IC2604	F4
C265	*L2	C428	K3	C718	*P2	C817	*N3	C1118	*J6	C1218	*L7	C1403	H4	C1756	*H2	C1855	*J3	C2073	*E2	C2173	*B3	C2274	B2	C2501	*F1	C2809	*F6	CL2105	*C2	FB408	*D5	IC408	*D5	IC2605	*P2
C266	*M2	C429	K3	C719	*N2	C818	*N3	C1119	*J6	C1219	*L7	C1404	H4	C1757	*G2	C1856	*J3	C2074	*E2	C2174	*B3	C2275	B1	C2502	*F7	C2810	E6	CL2106	*C2	FB409	*D5	IC409	*K3	IC2606	P5
C267	*M2	C430	K3	C720	*N2	C819	*N3	C1120	*K5	C1220	*L7	C1405	H4	C1758	*H4

IC2615	*D3	R19	*N7	R201	*N2	R333	*G1	R515	M3	R685	N4	R917	J6	R1125	*J6	R1310	L4	R1524	G2	R1689	H3	R1923	D3	R2105	B4	R2240	*F5	R2346	*G6	R2506	*F2	R3001	*B2	RB510	*M4	RV2200	B1
IC3000	N4	R20	*N7	R202	*N2	R334	D2	R516	M4	R686	N4	R918	K7	R1126	*J5	R1311	L3	R1525	G2	R1690	G3	R1924	D2	R2106	B3	R2241	*F5	R2347	*N6	R2507	G2	R3002	*B1	RB511	*M4	RV2201	B1
IC3001	K6	R21	N7	R203	*M2	R335	D2	R517	M4	R687	M3	R919	K6	R1127	*J5	R1312	L3	R1526	G3	R1691	*H3	R1925	D2	R2107	B3	R2242	*E5	R2348	*N6	R2508	*C5	R3003	*B2	RB512	L3	RV2202	C1
		R22	N7	R204	*M2	R336	*D2	R518	*M4	R688	M4	R920	K6	R1128	K5	R1313	L3	R1527	G2	R1692	*H3	R1926	D3	R2108	B3	R2243	*F5	R2349	*G6	R2509	*C6	R3004	*B1	RB513	L3	RV2203	C1
L200	*N2	R100	E7	R205	*N2	R337	*D2	R519	*L3	R689	*M3	R921	J6	R1129	K5	R1314	J6	R1528	*F3	R1693	G3	R1927	D3	R2109	B3	R2244	*E5	R2350	*G6	R2510	*F7	R3005	*B2	RB514	*L3		
L201	*M2	R101	F7	R206	*M2	R338	D2	R520	*P3	R690	M3	R922	K7	R1130	K5	R1315	J6	R1529	*F3	R1694	G3	R1928	D2	R2110	A3	R2245	*E5	R2351	*N6	R2511	*F7	R3006	B1	RB515	*L3	S501	N2
L208	*H1	R102	*C6	R207	*M2	R339	D2	R521	*P3	R691	M3	R923	K6	R1131	K5	R1316	H7	R1530	*F3	R1695	J3	R1929	D3	R2111	*A3	R2246	*E5	R2352	*N6	R2512	*C6	R3007	*B1	RB516	L3	S900	H7
L209	*K1	R103	E7	R208	*N2	R340	*D2	R522	*N4	R692	P3	R924	*K7	R1132	K5	R1317	H7	R1531	*F3	R1696	J3	R1930	D2	R2112	A3	R2247	*F5	R2353	*G6	R2513	*C6	R3008	B2	RB600	P3	S1400	L1
L210	*K1	R104	F7	R209	*M2	R341	*D2	R523	*N4	R693	P3	R925	J7	R1133	K5	R1318	H7	R1532	*G3	R1697	J3	R1931	D3	R2113	*A3	R2248	*E5	R2354	*G6	R2514	*C6	R3009	*B2	RB601	P3	S1900	E1
L211	*H1	R105	*C6	R210	*N2	R346	D2	R524	*N4	R694	P4	R926	K6	R1134	K5	R1321	H6	R1533	*G2	R1698	J3	R1932	D3	R2114	B3	R2249	*E5	R2355	G6	R2515	*C5	R3010	B1	RB900	H7	S2401	E1
L216	*L2	R106	*C6	R212	*M2	R347	*D2	R525	*N4	R695	*P3	R927	*K7	R1135	K5	R1322	H6	R1600	J2	R1699	J3	R1933	D2	R2115	*B3	R2250	*E5	R2401	*C7	R2516	G1	R3011	*B1	RB901	*J6	S2402	D7
L217	*L2	R107	*B6	R213	N2	R348	D2	R526	*N4	R696	*P3	R928	*J7	R1136	L6	R1323	H6	R1601	H2	R1700	J3	R1934	D2	R2116	B3	R2251	*F5	R2402	*C7	R2517	*F7	R3012	*B2	RB902	*J6		
L218	*J1	R108	*B6	R214	N2	R349	*D2	R527	*N4	R697	P4	R929	J7	R1137	*L6	R1324	H5	R1602	G3	R1701	J3	R1935	D2	R2117	*B3	R2252	*D5	R2403	*C6	R2518	*F7	R3013	*B1	RB903	*J5	TP100	G7
L219	*G1	R109	*B6	R217	M2	R350	*D2	R528	*N4	R698	P4	R930	K6	R1138	L6	R1325	*H5	R1603	J2	R1702	J3	R1936	D2	R2118	B3	R2253	*E5	R2404	*B7	R2519	*C6	R3014	*B2	RB904	*J5	TP101	N6
L223	*D1	R110	*C6	R218	M2	R352	D2	R529	*N4	R699	M3	R931	*K7	R1139	J5	R1326	*H5	R1604	H2	R1703	G3	R1937	D2	R2119	*B3	R2254	*E6	R2405	*C6	R2520	*C6	R3015	*B1	RB905	J5	TP501	P1
L224	*D1	R111	*C6	R220	*N2	R354	*D2	R600	N3	R700	M3	R932	K7	R1140	*L6	R1327	*H6	R1605	G3	R1704	G3	R1938	D2	R2120	B3	R2255	*E6	R2406	*C6	R2521	*C6	R3016	B2	RB906	J5	TP502	P1
L226	*D1	R112	*C6	R221	*M2	R355	D2	R601	N3	R701	M4	R933	J6	R1141	J5	R1328	M4	R1606	J3	R1705	G3	R1939	D2	R2121	*B3	R2256	*D5	R2407	*C6	R2522	*C6	R3017	B1	RB907	J5	TP503	P1
L227	*G1	R113	*B6	R222	*N2	R358	*D2	R602	N3	R702	M3	R934	J7	R1142	*J6	R1329	M4	R1607	J3	R1706	G3	R1940	D2	R2122	B3	R2257	*E5	R2408	*C7	R2523	*C6	R3018	B2	RB908	J6	TP504	P1
L228	*M2	R114	*B6	R223	*N2	R359	*D2	R603	M3	R703	*M4	R935	J6	R1143	*J6	R1330	M4	R1608	J3	R1707	G3	R1941	D2	R2123	*B3	R2258	*D5	R2409	*C7	R2524	*C6	R3019	B1	RB909	J6	TP900	J7
L229	*L2	R115	*B6	R224	*M2	R361	*E1	R604	N3	R704	M4	R936	*J6	R1144	J6	R1331	M4	R1609	J3	R1708	G3	R1942	D2	R2124	B3	R2259	*D6	R2410	*E1	R2525	F1	R3020	B2	RB910	J6	TP901	J7
L230	*M2	R116	D6	R225	*M2	R362	*E1	R605	N3	R705	M4	R937	*J6	R1145	J6	R1332	L4	R1610	J3	R1709	G3	R1943	D2	R2125	*B3	R2260	*D6	R2411	*C6	R2526	F1	R3021	B2	RB911	J6	TP902	H7
L231	*L2	R117	D6	R226	*N2	R363	*D1	R606	M3	R706	M4	R938	*J7	R1146	*L5	R1333	L4	R1611	J3	R1710	G3	R1944	D2	R2126	B3	R2261	*E6	R2412	*C6	R2527	G1	R3022	B1	RB912	J6	TP903	H7
L232	*K1	R118	*C6	R227	*N2	R365	*D1	R607	P3	R707	M4	R939	*J7	R1147	*L6	R1334	*J5	R1612	J3	R1711	G3	R1945	D2	R2127	*B3	R2262	*D6	R2413	*C6	R2528	G2	R3023	B1	RB913	*H6	TP1400	K1
L233	*K1	R119	*C6	R228	*M2	R367	*D1	R608	P3	R708	P3	R940	J7	R1148	*L6	R1335	*J5	R1613	J2	R1712	G3	R1946	D2	R2128	B3	R2263	*E6	R2414	*C5	R2529	G2	R3024	B2	RB914	H7	TP1401	K1
L234	*J1	R120	*C6	R229	*M2	R368	*D1	R609	P3	R709	P3	R941	J7	R1149	*L5	R1336	*J6	R1614	J3	R1713	G3	R1947	D2	R2129	*B3	R2264	*D6	R2415	*C5	R2530	G2	R3025	B2	RB915	H7	TP1402	K1
L235	*H1	R121	*B6	R232	*H2	R369	*D1	R610	P3	R710	P3	R942	*J6	R1150	*L5	R1337	*J6	R1615	J3	R1714	G3	R1948	D2	R2130	B3	R2265	*E6	R2416	*C5	R2534	*F7	R3026	B1	RB916	*H6	TP1403	K1
L236	*H1	R122	*B6	R233	*H2	R370	*D1	R611	P3	R711	P3	R943	*J6	R1154	L6	R1338	H6	R1616	J2	R1715	J3	R1949	D2	R2131	*B3	R2266	*D5	R2417	*C5	R2535	*F7	R3027	B1	RB917	*H6	TP1900	F1
L237	*J1	R123	*B6	R234	*K2	R373	*D1	R612	P3	R712	P3	R944	J6	R1155	*L6	R1339	*H5	R1617	J2	R1716	J3	R1950	D2	R2132	B3	R2267	*D5	R2418	*C5	R2536	*F7	R3028	B2	RB1100	*L6	TP1901	E1
L238	*G1	R124	D6	R235	*K2	R374	*D1	R613	P3	R713	P3	R945	J6	R1156	*L6	R1400	H4	R1618	J2	R1717	J3	R1951	D2	R2133	*B3	R2268	*D5	R2419	*C5	R2537	*C6	R3029	B1	RB1101	*L6	TP1902	E1
L239	*N2	R125	D6	R238	H2	R376	*D1	R614	P3	R714	P4	R946	*J7	R1157	*L6	R1401	H4	R1619	J2	R1718	J3	R1952	D2	R2134	*C2	R2269	*D5	R2420	*C5	R2538	*C6	R3030	B2	RB1102	*L7	TP1903	E1
L240	*M2	R126	D5	R240	*H2	R377	*D1	R615	P3	R715	P4	R947	*J7	R1158	L6	R1402	H4	R1620	J2	R1719	J3	R1953	D2	R2135	*C2	R2270	*E6	R2421	*C5	R2539	*C6	R3031	B1	RB1103	L5	TP2100	D3
L2100	C2	R127	D6	R241	K2	R379	*N2	R616	P3	R716	N2	R948	*L6	R1159	L6	R1403	H4	R1621	J2	R1720	J3	R1954	D2	R2136	*C2	R2271	*F6	R2422	*C5	R2540	*F2	R3032	B2	RB1300	*L4	TP2101	D3
L2101	C2	R128	D5	R244	*K2	R380	*N2	R617	N3	R717	N2	R949	*K6	R1160	J6	R1404	H4	R1622	J2	R1721	J3	R1955	D2	R2137	*C2	R2272	*E6	R2423	*C5	R2541	*F2	R3033	B2	RB1301	*L3	TP2200	E5
L2200	E4	R129	E5	R245	*H2	R381	*N2	R618	N3	R718	N2	R950	*K6	R1161	*J6	R1405	H4	R1623	J2	R1722	J4	R1956	D2	R2138	*C2	R2273	*D5	R2424	*C5	R2542	*F2	R3034	B2	RB1400	*L1	TP2201	E5
L2201	E4	R130	E5	R248	H2	R382	*N2	R619	N3	R719	N2	R951	*K6	R1162	L5	R1406	H4	R1624	H2	R1723	J3	R1957	D2	R2139	*C3	R2274	*F6	R2425	*C5	R2543	*F1	R3035	A2	RB1600	J4	TP2300	N6
L2202	*E5	R131	E6	R249	*K2	R383	*M3	R620	N3	R720	N2	R952	K5	R1163	J6	R1407	H4	R1625	H2	R1724	G3	R1958	D2	R2140	*C3	R2275	*D5	R2426	*C5	R2544	*F1	R3036	B2	RB1601	J4	TP2301	N6
L2203	*E5	R132	D5	R251	K2	R384	*M3	R621	M3	R721	N2	R953	K5	R1164	J6	R1408	H4	R1626	H2	R1725	*H4	R1959	D2	R2141	*C2	R2276	*E5	R2427	*D6	R2545	*F1	R3037	B2	RB1900	*E1	TP2302	G5
L2204	*D5	R133	D5	R254	*H2	R385	*M2	R622	M3	R722	M2	R954	K5	R1165	*J6	R1409	H4	R1627	H2	R1726	*J2	R1960	D2	R2142	*C2	R2277	*C1	R2429	D6	R2546	*F1	R3038	B1	RB2003	*F2	TP2303	G5
L2205	*E5	R134	E6	R256	*K2	R386	*M3	R623	M3	R723	M2	R955	K5	R1166	L6	R1410	H4	R1628	H2	R1727	*J2	R1961	D2	R2143	*C4	R2278	*C1	R2430	D6	R2547	*F1	R3039	B1	RB2100	B3	TP2401	D7
L2206	A2	R135	D5	R258	*H1	R401	*K2	R624	M3	R724	*N4	R956	*K5	R1167	*J6	R1411	H4	R1629	H2	R1728	*J2	R1962	D3	R2144	*C4	R2282	E4	R2431	D6	R2548	G1	R3040	B1	RB2101	B3	TP2402	D7
L2500	*F7	R136	*N7	R260	*K1	R402	*K2	R625	M3	R725	*N4	R957	*K5	R1168	L6	R1420	J4	R1630	H2	R1729	*J2	R1963	F3	R2145	*C4	R2283	*C1	R2432	D6	R2549	G1	R3041	B1	RB2102	B3	TP2403	D7
L2600	C5	R137	*N7	R261	*H1	R403	K2	R626	M3	R726	N2	R958	K5	R1169	L6	R1421	J4	R1631	H2	R1730	*H3	R1964	F3	R2146	C4	R2284	*C1	R2433	D6	R2550	G1	R3042	*F7	RB2103	B3	TP2404	D7
L2601	C6	R138	*N7	R264	*K1	R404	K2	R627	M3	R727	N2	R959	K5	R1170	L6	R1422	J4	R1632	H3	R1731	*H3	R1965	F3	R2147	*C4	R2285	C1	R2434	*D6	R2551	*C4	R3043	F7	RB2104	*B3		
L2602	C7	R139	*N7	R266	*H1	R405	K2	R628	M3	R728	P4	R960	*K5	R1171	J5	R1423	J4	R1633	H2	R1732	J2	R1966	F3	R2148	C4	R2286	*E5	R2435	D6	R2552	*C4	R3044	F7	RB2105	*B3	X400	K2
L2604	B5	R140	*N7	R267	*H1	R406	K2	R629	M3	R729	P4	R961	*K5	R1172	*J5	R1424	*J4	R1634	H2	R1733	H2	R1967	F3	R2149	C4	R2287	*F5	R2436	*D6	R2553	*C4	R3045	B2	RB2106	*B3	X401	K4
L2609	A6	R141	*N7	R270	*K1	R407	K3	R630	M3	R730	P3	R962	K5	R1173	J6	R1425	*J4	R1635	H2	R1734	J2	R1968	F3	R2150	*C3	R2288	C1	R2437	*D6	R2554	*C5	R3046	B1	RB2107	*B3	X402	K3
L2610	B5	R142	*N7	R271	*K1	R408	K3	R631	M3	R731	P3	R963	K5	R1174	*J6	R1426	J4	R1636	H3	R1735	J2	R1969	F3	R2151	C3	R2289	C1	R2438	D6	R2555	*C6	R3047	B2	RB2108	B3	X403	K2
L2620	G4	R143	*N7	R274	*H1	R409	K3	R632	M3	R732	P3	R964	*K5	R1175	J5	R1427	J4	R1637	H3	R1736	J2	R1970	F3	R2152	C3	R2290	C1	R2439	*D6	R2556	*C5	R3048	B1	RB2109	*B3	X404	D5
L2621	F4	R144	*M6	R276	*K1	R410	K3	R633	M3	R733	P3	R965	*K5	R1176	*J5	R1428	*J4	R1638	H3	R1737	J2	R2000	*E2	R2153	C2	R2291	*B1	R2440	D6	R2557	*C5	R3049	D4	RB2110	B3	X405	D5
L2622	N5	R145	*M6	R278	*H1	R411	K3	R634	M3	R734	P4	R966	K5	R1177	*J6	R1429	*J4	R1639	H3	R1738	J2	R2001	*E2	R2154	C2	R2292	*B1	R2441	D6	R2558	*C5	R3050	E4	RB2111	*B3		
L2623	N5	R146	*M6	R280	*K1	R412	*K3	R635	N3	R735	P3	R967	K5	R1178	*J6	R1430	*J4	R1640	*J3	R1739	J2	R2002	*E2	R2155	C2	R2293	C1	R2442	D6	R2559	*C5	R3300	*K1	RB2112	C4	*:B SIDE	
L2624	H4	R147	*M6	R282	*M2	R413	K4	R636	N3	R736	P4	R968	*M6	R1179	*J6	R1431	*J4	R1641	*J3	R1740	H2	R2003	*E2	R2156	C2	R2294	C1	R2443	D6	R2560	*C5	R3301	*H1	RB2113	C4		
L2625	H4	R148	*M6	R283	*M2	R414	K3	R637	N3	R737	N2	R969	*M6	R1180	*J6	R1432	J4	R1642	*H3	R1741	H2	R2005	F3	R2157	C2	R2295	*D4	R2444	D6	R2561	*C5	R3302	*K1	RB2114	*B4		
L2627	M5	R149	N7	R284	*L2	R415	K4	R638	M3	R738	P3	R970	*M6	R1181	J6	R1433	J4	R1643	*H3	R1742	H2	R2006	*E2	R2158	C3	R2296	*B1	R2445	*B6	R2562	*C5	R3303	*H1	RB2115	B4		
L2628	F6	R150	N7	R285	*L2	R416	K3	R639	P3	R739	P3	R971	*M6	R1182	L6	R1434	J4	R1644	J3	R1743	H2	R2007	F3	R2159	C4	R2297	*E4	R2446	*E7	R2563	*C4	R3304	*J1	RB2116	B4		
		R151	N7	R286	*J2	R417	K4	R640	P3	R740	P3	R1027	H7	R1183	J6	R1435	J4	R1645	J3	R1744	H2	R2008	*E2	R2160	C4	R2298	*B1	R2447	*D6	R2564	*C4	R3306	*G1	RB2117	B3		
Q204	H2	R152	*M6	R287	*J2	R418	K3	R641	P3	R741	P3	R1032	*J5	R1184	L5	R1436	*J4	R1646	J3	R1745	H2	R2011	E3	R2161	*C4	R2301	N6	R2448	*D6	R2565	*B5	R3307	*L2	RB2118	B3		
Q206	K2	R153	*M6	R288	*G2	R420	K2	R642	P3	R742	M3	R1033	J5	R1185	L6	R1437	*J4	R1647	J3	R1800	H2	R2012	E3	R2162	*C4	R2302	*N6	R2449	*D6	R2566	*B5	R3308	*L2	RB2200	*F7		
Q208	H2	R154	*M6	R289	*G2	R423	K2	R643	P3	R743	M3	R1034	J5	R1186	*K6	R1438	*J4	R1648	J3	R1801	H2	R2013	D3	R2163	C4	R2303	N6	R2450	*D6	R2567	*B4	R3309	*N2	RB2201	*F7		
Q210	K2	R155	*M6	R290	L2	R424	K2	R644	P3	R744	M3	R1035	*J5	R1187	*L6	R1439	*J4	R1649	J3	R1802	J2	R2014	D3	R2200	*E5	R2304	G6	R2451	*D6	R2568	*B4	R3310	*N2	RB2202	F7		
Q212	L2	R156	*M6	R291	L2	R429	*D4	R645	P3	R745	*M3	R1036	*J6	R1188	L6	R1440	J4	R1650	J3	R1803	J2	R2015	F3	R2201	*E5	R2305	*G6	R2452	*D6	R2569	*B4	R3311	*M2	RB2401	*B7		
Q213	L2	R157	*M6	R292	*L2	R430	*D5	R646	P3	R746	*M3	R1037	*J5	R1189	*K7	R1441	J4	R1651	J2	R1804	H2	R2016	F3	R2202	*E5	R2306	F6	R2453	*D6	R2570	*B4	R3312	*M2	RB2402	*B7		
Q214	J2	R158	*M6	R293	J2	R431	*D5	R647	N3	R747	*M3	R1038	J5	R1190	*L6	R1442	*J4	R1652	H2	R1805	H2	R2017	E2	R2203	*E5	R2307	N5	R2454	*D6	R2571	*B4	R3313	L2	RB2403	*B7		
Q215	G2	R159	*M6	R294	G2	R432	D5	R648	N3	R748	P4	R1039	J5	R1191	*J5	R1443	*J4	R1653	H2	R1806	H2	R2018	E2	R2204	*E5	R2308	G6	R2455	*D6	R2572	*B4	R3314	L2	RB2404	*C7		
Q216	L2	R162	*M7	R295	*L2	R433	D5	R649	P3	R749	P4	R1040	J5	R1192	*J6	R1444	J4	R1654	H2	R1807	H2	R2019	D3	R2205	*E5	R2309	P6	R2456	*D6	R2645	F5	R3315	K2	RB2405	*B7		
Q217	L2	R163	N7	R296	*J2	R434	D5	R650	P3	R750	P4	R1041	J6	R1193	*J5	R1445	J4	R1655	H2	R1808	H2	R2023	E3	R2206	*D4	R2310	G6	R2457	*D6	R2650	P5	R3316	J2	RB2406	*B7		
Q218	J2	R164	M7	R297	*L2	R435	D5	R651	N3	R751	P4	R1042	*J5	R1194	*J5	R1446	J4	R1656	H3	R1809	H2	R2027	D3	R2207	*E4	R2311	P5	R2458	*D6	R2651	K5	R3317	H2	RB2407	*C7		
Q219	G2	R165	*N7	R298	*G2	R436	C4	R652	N3	R800	N3	R1043	*J5	R1195	*J6	R1447	J4	R1657	H3	R1810	J2	R2033	E3	R2208	*D4	R2312	P5	R2459	*D6	R2652	P5	R3318	G2	RB2408	*B7		
Q220	D2	R166	N7	R299	*M2	R437	C4	R653	N3	R801	N3	R1044	*J5	R1196	*J6	R1448	K1	R1658	G3	R1811	J2	R2039	*D3	R2209	*D4	R2313	P5	R2460	C1	R2653	J4	R3319	D2	RB2409	*C7		
Q221	D2	R167	M7	R300	L2	R438	C4	R654	N3	R802	N3	R1045	*J5	R1200	L7	R1449	K1	R1659	G3	R1812	H2	R2040	*D3	R2210	*D4	R2314	P5	R2461	*D6	R2654	J5	R3320	D2	RB2410	*B7		
Q223	D2	R168	*M7	R301	*J2	R439	C4	R655	N3	R803	N3	R1046	*J5	R1201	L7	R1450	K1	R1660	H3	R1813	H2	R2041	E2	R2211	*E4	R2315	P5	R2462	*D6	R2655	P5	R3321	*L2	RB2411	*B7		
Q224	D2	R169	M7	R302	L2	R440	C4	R656	N3	R804	N3	R1047	*J5	R1202	L7	R1451	K1	R1661	J3	R1814	H2	R2042	E2	R2212	*E4	R2316	P5	R2463	*D6	R2656	P5	R3322	*L2	RB2412	*B7		
Q400	*K2	R170	M7	R303	J2	R441	D5	R657	M3	R805	N3	R1056	J6	R1203	L7	R1452	*L1	R1662	J3	R1815	H2	R2043	E2	R2213	*E4	R2317	P5	R2464	*C2	R2657	J5	R3323	*M2	RB2413	*B6		
Q401	*K4	R171	*M7	R304	G2	R442	D5	R658	M3	R806	N3	R1057	*J6	R1204	K7	R1453	*L1	R1663	J3	R1816	*H2	R2044	*E3	R2214	*D4	R2318	P5	R2465	*D6	R2659	F5	R3324	*L2	RB2414	*B5		
Q402	*K3	R172	M7	R305	*G2	R443	D5	R659	M3	R807	N3	R1058	*K6	R1205	K7	R1454	*K1	R1664	G3	R1817	H2	R2045	E2	R2215	*D4	R2319	G6	R2466	*D7	R2660	F5	R3325	*K2	RB2415	*B5		
Q403	*K2	R173	M7	R306	*L2	R446	K2	R660	M3	R808	N3	R1100	L6	R1206	K7	R1455	*K1	R1665	G3	R1818	H2	R2046	*E3	R2216	*E4	R2320	G6	R2467	*D7	R2661	*M6	R3326	*J2	RB2416	*C7		
Q404	*D5	R174	*M7	R307	*L2	R447	K1	R661	N3	R809	N3	R1101	K7	R1207	K7	R1456	J3	R1666	H3	R1900	F4	R2051	D3	R2217	*E4	R2321	G6	R2468	*D7	R2662	*M6	R3327	*J1	RB2417	*B5		
Q405	*D5	R175	M7	R308	*J2	R448	L2	R662	N3	R810	N3	R1102	K6	R1208	K7	R1501	*G3	R1667	J3	R1901	F3	R2052	*E3	R2218	*B1	R2322	G6	R2469	*P3	R2663	*M5	R3328	*H2	RB2418	*B6		
Q2200	*E5	R176	M7	R309	*G2	R449	L2	R663	M3	R811	N3	R1103	K7	R1209	K7	R1503	*G2	R1668	J3	R1902	F3	R2053	D3	R2219	*B1	R2323	G6	R2470	*P3	R2664	*M5	R3329	*G2	RB2419	*C1		
Q2201	*F5	R177	*M7	R310	*L2	R450	K2	R664	M3	R812	M2	R1104	*J6	R1210	*K7	R1504	*G3	R1669	J3	R1903	F3	R2054	D3	R2220	D4	R2324	G6	R2471	*P3	R2665	*M5	R3330	*D2	RB2420	*D7		
		R178	M7	R311	*M2	R451	*K3	R665	M3	R813	M3	R1105	K6	R1211	*K7	R1505	*G2	R1670	H4	R1904	F3	R2055	D2	R2221	E4	R2325	G6	R2472	*P3	R2666	*M5	R3331	*D2	RB2421	*C1		
R1	P7	R179	M7	R312	*J1	R452	*K3	R666	M3	R814	M2	R1106	*J6	R1212	*K7	R1506	*F3	R1671	H4	R1905	F3	R2058	D3	R2222	*E5	R2326	G6	R2473	*L5	R2667	*M5			RB2422	*D7		
R2	P7	R180	*M7	R313	*L2	R453	K3	R667	P3	R815	M3	R1107	K6	R1213	*L7	R1507	*F2	R1672	*H4	R1906	F3	R2059	D3	R2223	*F5	R2327	*N7	R2474	*L4	R2668	*M5	RB100	*G7	RB2423	*B7		
R3	*P7	R181	N7	R314	*G1	R454	K3	R668	P4	R816	N3	R1108	*K5	R1215	*L7	R1508	G3	R1673	*H4	R1907	F3	R2061	D3	R2224	*E5	R2328	*G7	R2475	*K3	R2669	*M5	RB101	*G7	RB2424	*C7		
R4	*P7	R182	*M7	R315	*M2	R455	K2	R669	P4	R817	N3	R1109	J5	R1216	*L7	R1509	G2	R1674	*H4	R1908	F3	R2062	D3	R2225	*F5	R2329	*N7	R2476	*K3	R2670	*M5	RB102	G7	RB2425	*B7		
R5	P7	R183	N7	R316	*J1	R501	*P1	R670	M4	R818	N3	R1110	*K5	R1217	*L7	R1510	F3	R1675	*H4	R1909	F3	R2063	D3	R2226	*E5	R2330	*G7	R2479	*P3	R2671	*F6	RB103	G7	RB2426	*B6		
R6	P7	R184	*M7	R317	*G1	R502	*P1	R671	M4	R900	*K6	R1111	J5	R1218	*L7	R1511	F2	R1676	*H4	R1910	F3	R2064	D3	R2227	*E5	R2331	*P7	R2480	*L4	R2672	*F6	RB104	*N7	RB2427	*B7		
R7	*P7	R185	*M7	R318	*L2	R503	*P1	R672	N2	R901	J6	R1113	J5	R1219	*M7	R1512	F3	R1677	H3	R1911	F3	R2065	D3	R2228	*E5	R2332	*H7	R2481	*J3	R2673	*F6	RB105	*N7	RB2428	*B6		
R8	*P7	R186	*M7	R320	*M2	R504	*P1	R673	N2	R902	K7	R1114	L6	R1220	*L7	R1513	F3	R1678	G3	R1912	*E2	R2070	F3	R2229	*E5	R2334	*N6	R2483	*P3	R2674	*F6	RB106	*M7	RB2429	*B5		
R9	P7	R187	*M7	R322	*J1	R505	*P2	R674	M4	R904	*K6	R1115	L6	R1300	M4	R1514	F3	R1679	G3	R1913	*E2	R2071	F3	R2230	*E5	R2335	*N6	R2484	*C6	R2675	*F6	RB107	*M7	RB2500	*C7		
R10	P7	R188	N7	R324	*G1	R506	*P2	R676	M4	R905	J6	R1116	L6	R1301	M3	R1515	F3	R1680	J3	R1914	*E2	R2072	E3	R2231	*E5	R2336	*N6	R2485	*C1	R2676	*F6	RB501	*N2	RB2501	D7		
R11	*P7	R189	N7	R325	*G1	R507	*P2	R677	M4	R906	K7	R1117	*K6	R1302	*L3	R1516	F3	R1681	J3	R1915	*E2	R2076	*E3	R2232	*E5	R2337	*N6	R2486	D6	R2677	*F6	RB502	M3

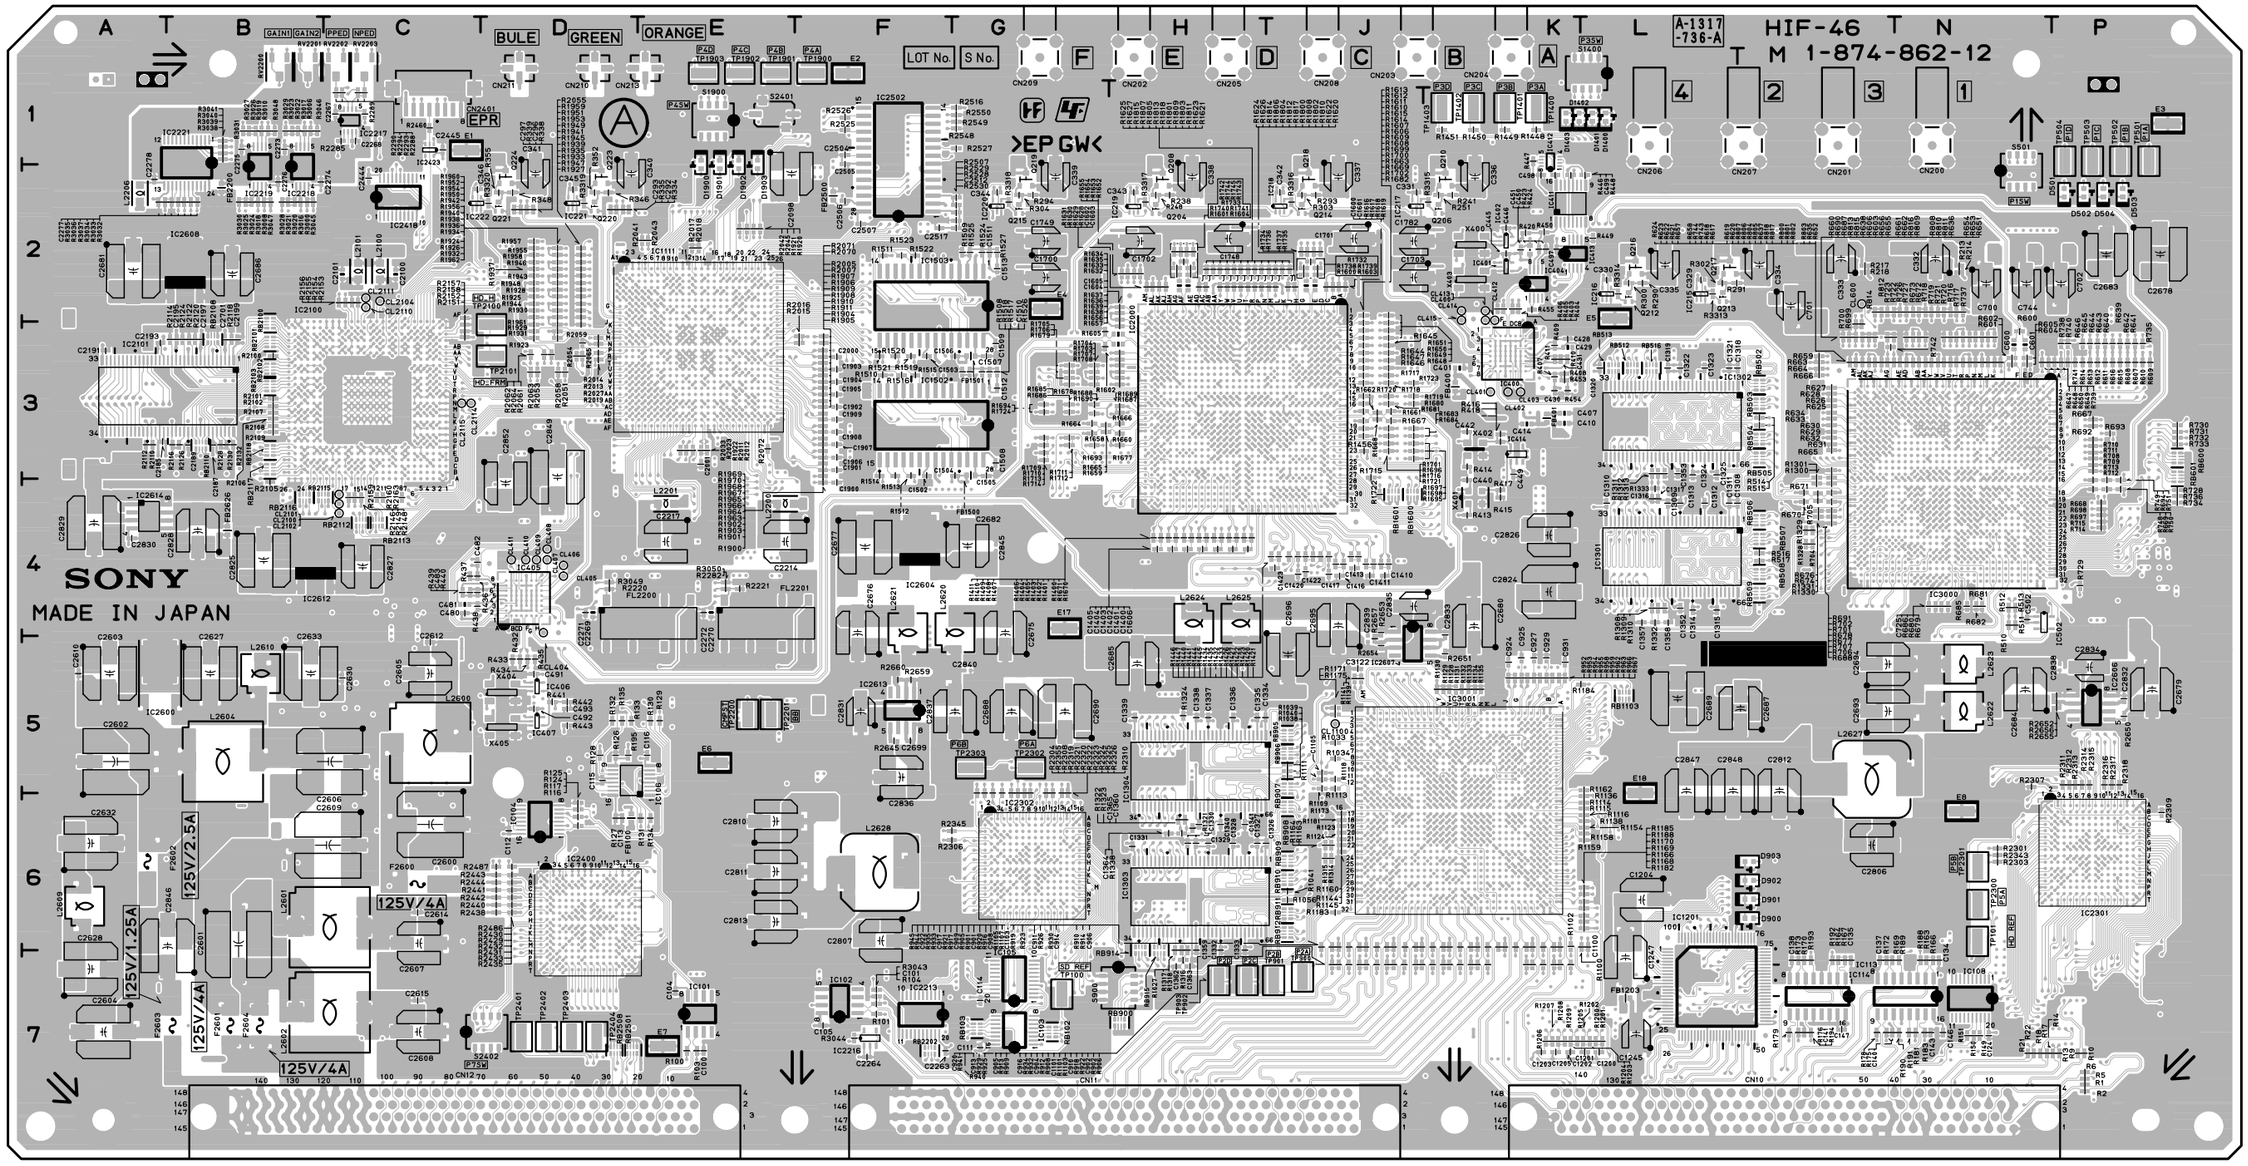

HIF-46 -A SIDE-
SUFFIX: -12

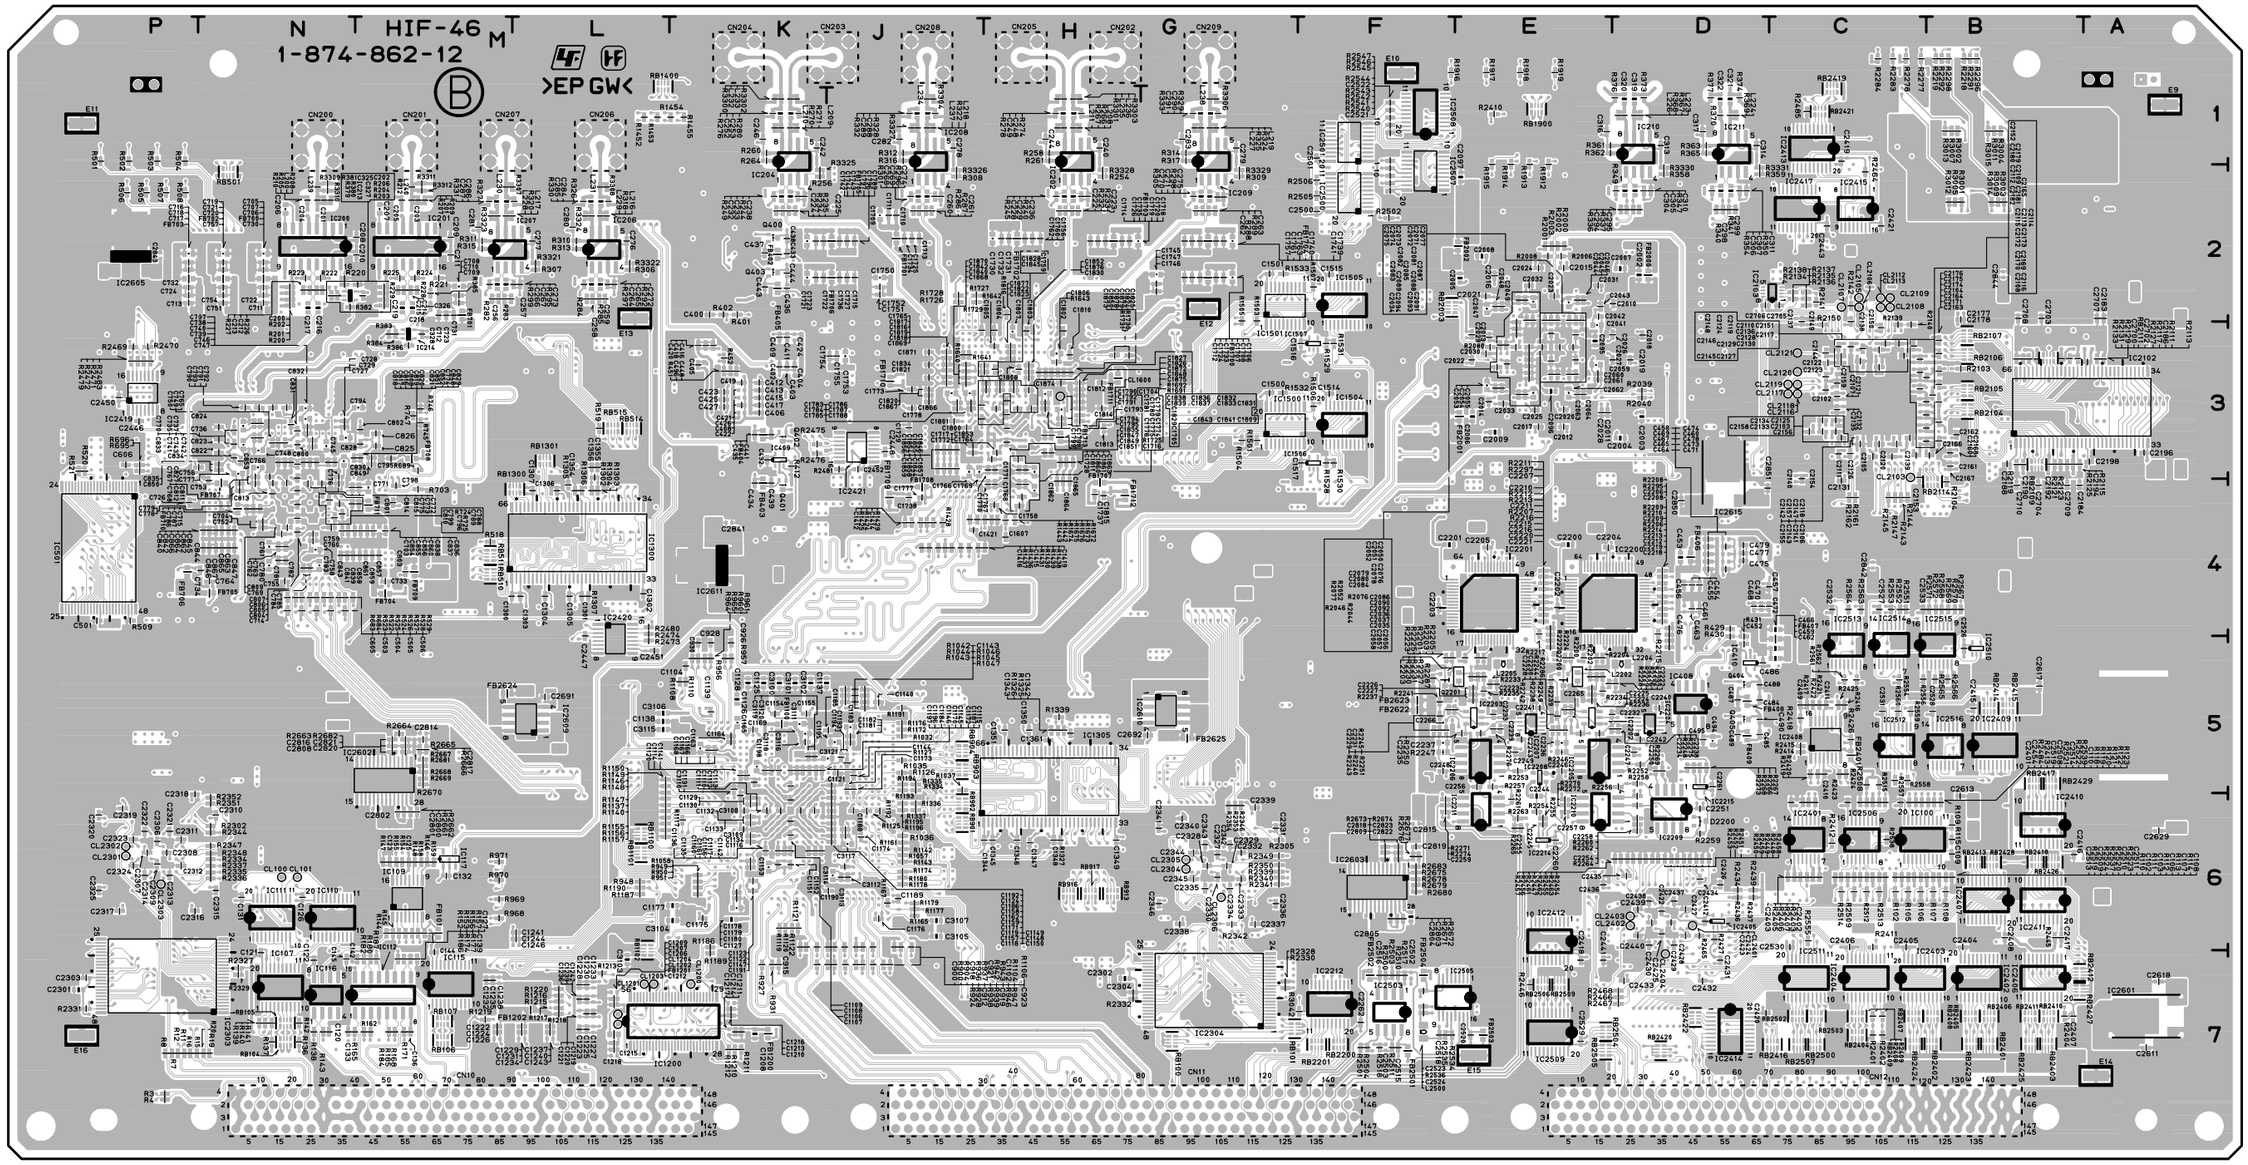

HIF-46 -B SIDE-
SUFFIX: -12

HIF-56 (1-879-428-11)

C100	E7	C275	*G2	C418	*K3	C717	*P2	C816	*N4	C1117	*K6	C1217	*K7	C1402	H4	C1770	*H3	C1869	*J3	C2095	*E3	C2195	B3	C2319	*P6	C2523	*F7	C2831	F5	C3454	*P2	CN206	L1	FB1500	G3
C101	F7	C276	*L2	C419	*K3	C718	*P2	C817	*N4	C1118	*J6	C1218	*L7	C1403	H4	C1771	*H3	C1870	*J3	C2096	*E3	C2196	*A3	C2320	*P6	C2524	*F7	C2832	P5	C3455	P2	CN207	M1	FB1501	G3
C102	*C6	C277	*L2	C420	*K3	C719	*N2	C818	*N4	C1119	*J6	C1219	*L7	C1404	H4	C1772	*J3	C1871	*H4	C2097	*E2	C2197	B3	C2321	*P6	C2526	*B5	C2833	K4	C3456	P2	CN208	J1	FB1700	*G2
C103	*C6	C278	*J1	C421	*K3	C720	*N2	C819	*N4	C1120	*K5	C1220	*L7	C1405	H4	C1773	*J3	C1900	F4	C2098	E2	C2198	*A3	C2322	*P6	C2527	*C4	C2834	P5	C3457	P2	CN209	G1	FB1701	*H2
C104	E7	C279	*G1	C422	*K3	C721	*N2	C820	*N4	C1121	*J5	C1221	*L7	C1500	*G3	C1774	*J3	C1901	F3	C2100	C2	C2199	B3	C2323	*P6	C2528	*B5	C2835	J4	C3458	P2	CN210	D1	FB1702	*H2
C105	F7	C280	*L2	C423	*K3	C722	*N2	C821	*N4	C1122	*K6	C1222	*M7	C1501	*G2	C1775	*J3	C1902	F3	C2101	C2	C2200	*E4	C2324	*P6	C2529	*E7	C2836	F5	C3459	P1	CN211	D1	FB1703	*G2
C106	*B6	C281	*L2	C424	*K3	C723	*M2	C822	*N3	C1123	*K6	C1223	*L7	C1502	F3	C1776	*J3	C1903	F3	C2102	*C3	C2201	*F4	C2325	*P6	C2530	*C6	C2837	G5	C3460	P1	CN213	E1	FB1704	*J2
C107	*B6	C282	*J1	C425	*K3	C724	*P2	C823	*N3	C1124	*J5	C1224	*M7	C1503	F3	C1777	*J3	C1904	F3	C2103	*C3	C2202	*E4	C2327	*G6	C2531	*C5	C2838	P5	C3461	P1	CN2401	C1	FB1705	*J2
C108	*B6	C283	*G1	C426	*K3	C725	*N4	C824	*N4	C1125	*K5	C1225	*L7	C1504	G3	C1778	*J3	C1905	F3	C2104	*B3	C2203	*F4	C2328	*G6	C2532	*C4	C2839	J5	C3462	P1			FB1706	*J2
C109	*B6	C284	*L2	C427	*K3	C726	*N4	C825	*N4	C1126	*K5	C1226	*M7	C1505	G3	C1779	*J3	C1906	F3	C2105	*C3	C2204	*E4	C2329	*G6	C2533	*C4	C2840	G5	C3463	P1	D501	N2	FB1707	*H4
C110	*C6	C285	*L2	C428	K3	C727	P2	C826	*N3	C1127	*K6	C1227	*L7	C1506	G3	C1780	*J3	C1907	F3	C2106	*C3	C2205	*E4	C2330	*G6	C2600	C6	C2841	*K4	C3464	P1	D502	P2	FB1708	*G3
C111	G7	C286	*M2	C429	K3	C728	P2	C827	*N3	C1128	*K5	C1228	*L7	C1507	G3	C1781	*J3	C1908	F3	C2107	*C3	C2206	*D4	C2331	*G6	C2601	B6	C2842	*C4	C3465	*P1	D503	P2	FB1710	*H4
C112	D6	C287	*M2	C430	K3	C729	P2	C828	*N4	C1129	*K6	C1229	*L7	C1508	G3	C1782	J2	C1909	F3	C2108	*C3	C2207	*E4	C2332	*G6	C2602	A5	C2843	*P2	C3466	*P1	D504	P2	FB1711	*J3
C113	D6	C288	*J1	C431	K3	C730	*N2	C829	*N4	C1130	*K6	C1230	*L7	C1509	G3	C1783	*H4	C2000	F3	C2109	*C3	C2208	*D4	C2333	*G6	C2603	A5	C2844	*B2	C3467	*P2	D900	M6	FB2000	*D2
C114	G7	C289	*J1	C433	*K2	C731	*M2	C830	*N3	C1131	*K6	C1231	*L7	C1510	G3	C1784	*H4	C2001	E3	C2110	*C3	C2209	*D4	C2334	*G6	C2604	A7	C2845	G4	C3468	*P2	D901	M6	FB2001	*E3
C115	D5	C290	*G1	C434	*P3	C732	*P2	C831	*N3	C1132	*K6	C1232	*M7	C1511	G2	C1785	*H3	C2002	*D2	C2111	*C3	C2210	*E4	C2335	*G6	C2605	C5	C2846	B6	C3469	P1	D902	M6	FB2002	*E2
C116	E5	C291	*G1	C435	*P3	C733	*N4	C832	*N3	C1133	*K6	C1233	*L7	C1512	G3	C1786	*J3	C2003	*D3	C2112	*C3	C2211	*E4	C2336	*G6	C2606	C5	C2847	L5	C3470	*P2	D903	M6	FB2200	B2
C120	*N7	C292	*D2	C436	*K3	C734	*N4	C833	*N3	C1134	*K6	C1234	*L7	C1513	G2	C1787	*J3	C2004	*D3	C2113	*B3	C2212	*D4	C2337	*G6	C2607	C6	C2848	L5	C3471	*P2	D1400	L1	FB2401	*C5
C121	*N7	C293	*D2	C437	*K2	C735	N2	C834	*N3	C1135	*K6	C1235	*M7	C1514	*F3	C1788	*J3	C2005	*E2	C2114	*B3	C2213	*D4	C2338	*G6	C2608	C7	C2850	*D4	C3472	K2	D1401	L1	FB2500	F2
C122	*N7	C296	*D2	C438	*K2	C736	N2	C835	*N3	C1136	*K6	C1236	*L7	C1515	*F2	C1789	*J2	C2006	*E3	C2115	*C3	C2214	E4	C2339	*G6	C2609	C6	C2851	*D4	C3473	K2	D1402	K1	FB2501	*F7
C123	*M6	C297	*D2	C439	*P3	C737	N2	C836	*N4	C1137	*J5	C1237	*L7	C1516	*F3	C1790	*H3	C2007	*D2	C2116	*B3	C2215	*E4	C2340	*G6	C2610	A5	C2852	D4	C3474	*P1	D1403	K1	FB2502	*F7
C124	N7	C304	*D2	C440	P3	C738	N2	C837	*N4	C1138	*L5	C1238	*M7	C1517	*F3	C1791	*H3	C2008	*E2	C2117	*C3	C2216	*E4	C2341	*G6	C2611	*A7	C2867	D3	C3475	*P1	D1900	E2	FB2503	*E7
C125	*M6	C305	*D2	C441	*P3	C739	N2	C838	*N3	C1139	*K5	C1239	*L7	C1606	H4	C1792	*H3	C2009	*E3	C2118	*C3	C2217	E4	C2342	*G6	C2612	C5	C3100	*K5	C3476	*P1	D1901	E2	FB2504	*F7
C126	*N6	C306	*D2	C442	P3	C740	N2	C839	*N3	C1140	*J5	C1240	*L7	C1607	G3	C1793	*H4	C2010	*D2	C2119	*C3	C2218	*D5	C2343	*G6	C2613	*B6	C3101	*K5	C3477	*P1	D1902	E2	FB2622	*F5
C127	*M6	C307	*D2	C443	*K3	C741	M2	C840	*N3	C1141	*K5	C1241	*L6	C1608	G3	C1794	*H4	C2011	*E3	C2120	*C3	C2219	*D5	C2344	*G6	C2614	C6	C3102	*K5	C3478	K2	D1903	E2	FB2623	*F5
C131	*N6	C310	*D2	C444	*K3	C742	M2	C841	*N3	C1142	*K6	C1242	*L7	C1609	J3	C1795	*H4	C2012	*E3	C2121	*C3	C2220	*E5	C2345	*G6	C2615	C7	C3103	*L7	C3479	K2	D2200	*D6	FB2624	*M5
C132	*M6	C311	*D2	C445	K2	C743	M2	C842	*N4	C1143	*J5	C1243	*L7	C1610	J3	C1796	*J2	C2013	*E3	C2122	*C3	C2221	*E5	C2346	*G6	C2617	*B5	C3104	*K6					FB2625	*G5
C133	*N7	C313	*D1	C446	K2	C744	N2	C843	*N4	C1144	*J5	C1244	*L6	C1611	*J3	C1797	*J2	C2014	*E3	C2123	*C3	C2222	*D5	C2401	*C6	C2618	*A7	C3105	*J6	CL100	*N6	E1	C1	FB2626	B4
C134	N7	C314	*D1	C448	*K3	C745	*P3	C844	*N4	C1145	*K5	C1245	L7	C1612	*J3	C1798	*H3	C2015	*E2	C2124	*C3	C2223	*E5	C2402	*C6	C2627	B5	C3106	*L5	CL101	*N6	E2	F1		
C135	M7	C316	*D1	C449	P3	C746	*P3	C845	*N4	C1146	*K5	C1246	*L6	C1700	G2	C1799	*J3	C2016	*E2	C2125	*C3	C2224	*E5	C2403	*C6	C2628	A7	C3107	*J6	CL400	K3	E3	P1	FL2200	E4
C136	*M7	C317	*D1	C450	K2	C747	*P3	C846	*N3	C1147	*K6	C1247	L7	C1701	J2	C1800	*J3	C2017	*E3	C2126	*C3	C2225	*E5	C2404	*B6	C2629	*A6	C3108	*K6	CL401	K3	E4	H1	FL2201	E4
C137	M7	C319	*D1	C451	K2	C748	P3	C847	*N3	C1148	*J6	C1300	*M4	C1702	H2	C1801	*H3	C2018	*D3	C2127	*C3	C2226	*E5	C2405	*C6	C2630	C5	C3109	*K6	CL402	K3	E5	K1		
C138	M7	C320	*D1	C452	*D5	C749	P3	C848	*N3	C1149	*J6	C1301	*L4	C1703	J2	C1802	*J3	C2019	*D3	C2128	*C3	C2227	*E5	C2406	*C6	C2632	A6	C3110	*K5	CL403	K3	E6	E5	IC100	*C6
C139	*M7	C321	*D1	C453	*D4	C750	P3	C849	*N4	C1150	*J6	C1302	*L4	C1704	*H3	C1803	*H3	C2020	*E3	C2129	*C3	C2228	*E5	C2407	*B7	C2633	B5	C3111	*K5	CL404	D4	E7	E7	IC101	E7
C140	M7	C322	*D1	C454	*D4	C751	*N2	C850	*N3	C1151	*K6	C1303	*L4	C1705	*J3	C1804	*J3	C2021	*E2	C2130	*C3	C2229	*F5	C2408	*B6	C2675	G4	C3112	*J6	CL405	D4	E8	N6	IC102	F7
C141	M7	C325	*M2	C455	*D4	C752	*N4	C851	*N4	C1152	*K6	C1304	*L4	C1706	*G2	C1805	*H3	C2022	*E3	C2131	*C4	C2230	*E5	C2409	*C5	C2676	F4	C3113	*J6	CL406	D4	E9	*A1	IC103	G7
C142	*M7	C326	*M2	C456	*D4	C753	*N3	C852	*N4	C1153	*K6	C1305	*L4	C1707	*G2	C1806	*H3	C2023	*E2	C2132	*C3	C2231	*F5	C2410	*C5	C2677	F4	C3114	*J6	CL407	D4	E10	*F1	IC104	D6
C143	N7	C327	*N2	C457	*C4	C754	*N2	C853	*N4	C1154	*K5	C1306	*L4	C1708	*G2	C1807	*H3	C2024	*E2	C2133	*C3	C2232	*D5	C2411	*C5	C2678	P2	C3115	*L5	CL408	D4	E11	*P1	IC105	G7
C144	*M7	C328	*M2	C458	*D4	C755	*N4	C854	*N4	C1155	*K5	C1307	*L4	C1709	*J2	C1808	*H3	C2025	*E3	C2134	*C3	C2233	*E5	C2412	*D6	C2679	P5	C3116	*K5	CL409	D4	E12	*G2	IC106	D5
C145	*N7	C329	L2	C459	*C5	C756	*N3	C855	*N4	C1156	*K6	C1308	L4	C1710	*J2	C1809	*H3	C2026	*D3	C2135	*C3	C2234	*E5	C2415	*B5	C2680	K4	C3117	*J6	CL410	D4	E13	*L2	IC107	*N7
C146	N7	C330	L2	C460	*D4	C757	*N2	C856	*N4	C1157	*J6	C1309	L4	C1711	*J2	C1810	*H3	C2027	*D3	C2136	*C3	C2235	*E5	C2416	*B6	C2681	A2	C3118	*K5	CL411	D4	E14	*A7	IC108	N7
C147	M7	C331	J2	C461	*D4	C758	*N4	C857	*N4	C1158	*J6	C1310	L4	C1712	*G2	C1811	*H3	C2028	*E3	C2137	*C3	C2236	*E5	C2417	*B6	C2682	G4	C3119	*K5	CL412	K3	E15	*E7	IC109	*M6
C200	*N2	C332	N2	C462	*C5	C759	*N4	C858	*M4	C1159	*J6	C1311	L4	C1713	*H2	C1812	*H3	C2029	*E3	C2138	*C3	C2237	*F5	C2418	*E7	C2683	P2	C3120	*K5	CL413	K3	E16	*P7	IC110	*N6
C201	*N2	C333	M2	C463	*D4	C760	*N4	C859	*M4	C1160	*K6	C1312	L4	C1714	*H2	C1813	*H3	C2030	*E3	C2139	*C3	C2238	*D5	C2419	*C1	C2684	N5	C3121	*J5	CL414	K3	E17	G7	IC111	*N6
C202	*M2	C334	M2	C464	*D4	C761	*M4	C860	*M4	C1161	*K6	C1313	L4	C1715	*J2	C1814	*H3	C2031	*E2	C2140	*C4	C2239	*E5	C2420	*D7	C2685	H5	C3122	J5	CL415	K3	E18	P7	IC112	*M7
C203	*M2	C335	L2	C465	*D4	C762	*M4	C861	*M4	C1162	*J6	C1314	L4	C1716	*H3	C1815	*H3	C2032	*E2	C2141	*C3	C2240	*D5	C2421	*C2	C2686	B2	C3400	K2	CL416	K2			IC113	N7
C204	*N2	C336	K2	C466	*C4	C763	*M4	C862	*M4	C1163	*K5	C1315	L4	C1717	*J3	C1816	*H3	C2033	*E3	C2142	*C3	C2241	*E5	C2422	*D6	C2687	M5	C3401	K2	CL421	P1	F2600	C6	IC114	M7
C205	*M2	C337	J2	C467	*D4	C764	*N4	C863	*M4	C1164	*K5	C1316	L4	C1718	*H2	C1817	*H3	C2034	*E3	C2143	*C3	C2242	*D5	C2423	*D6	C2688	G5	C3402	K2	CL422	P1	F2601	B7	IC115	*M7
C206	*N2	C338	H2	C468	*D4	C765	*N3	C864	P3	C1165	*K5	C1317	L4	C1719	*H2	C1818	*H3	C2035	*E3	C2144	*C3	C2243	*E5	C2424	*D6	C2689	L5	C3403	K2	CL423	P1	F2602	A6	IC116	*N7
C207	*M2	C339	G2	C469	*D4	C766	*M4	C865	P3	C1166	*K5	C1318	L3	C1720	*H2	C1819	*H3	C2036	*E3	C2145	*C3	C2244	*E6	C2425	*D6	C2690	G5	C3404	K2	CL600	M3	F2603	B7	IC117	*M6
C208	*N2	C340	D2	C470	*D4	C767	*N4	C866	P3	C1167	*K5	C1319	L3	C1721	*K2	C1820	*H3	C2037	*E3	C2146	*C3	C2245	*E6	C2426	*D6	C2691	*L5	C3405	*K2	CL1100	J5	F2604	B7	IC200	*N2
C209	*M2	C341	D2	C471	*D4	C768	*M4	C867	P3	C1168	*K5	C1320	L3	C1722	*K2	C1821	*H3	C2041	*E3	C2147	*C3	C2246	*E5	C2427	*D6	C2692	*G5	C3406	K2	CL1200	*K7			IC201	*M2
C210	*N2	C342	J2	C472	*C4	C769	*N4	C900	*K6	C1169	*K5	C1321	L3	C1723	*K2	C1822	*H3	C2042	*E2	C2148	*C3	C2247	*D5	C2428	*D6	C2693	M5	C3407	L2	CL1201	*L7	FB100	D6	IC202	*H1
C211	*M2	C343	H2	C473	*D4	C770	*N3	C901	J6	C1170	*K5	C1322	L3	C1724	*G2	C1823	*H3	C2043	*E2	C2149	*C3	C2248	*F5	C2429	*D6	C2694	M5	C3408	K2	CL1202	*L7	FB101	*M6	IC204	*K1
C212	*N2	C344	G2	C474	*D4	C771	*N4	C902	K7	C1171	*J6	C1323	L3	C1725	*J2	C1824	*H3	C2044	*E2	C2150	*C3	C2249	*E5	C2430	*D6	C2695	J4	C3409	*K2	CL1203	*L7	FB200	*M2	IC206	*L2
C213	*N2	C345	D2	C475	*D4	C772	*N4	C904	K7	C1172	*K5	C1324	L3	C1726	*H2	C1825	*H3	C2045	*E2	C2151	*C3	C2250	*D5	C2431	*D7	C2696	J5	C3410	*K2	CL1204	*L7	FB201	*L2	IC207	*M2
C214	*M2	C346	C2	C476	*D4	C773	*N4	C905	J7	C1173	*J5	C1325	L3	C1727	*J2	C1826	*H3	C2046	*E2	C2152	*C3	C2251	*D6	C2432	*D7	C2699	F5	C3411	K2	CL1600	*H3	FB202	*L2	IC208	*J1
C215	*M2	C347	*M2	C477	*D4	C774	*N4	C906	K6	C1174	*J6	C1326	H6	C1728	*H3	C1827	*H3	C2047	*E2	C2153	*C3	C2254	*D6	C2433	*D7	C2700	*B3	C3412	K2	CL2100	C4	FB203	*L2	IC209	*G1
C216	*N2	C348	*N2	C478	*D4	C775	*N4	C908	K6	C1175	*K6	C1327	H6	C1729	*J3	C1828	*H3	C2048	*E2	C2154	*C4	C2255	*E6	C2434	*D6	C2701	B3	C3413	*K2	CL2101	C4	FB204	*K1	IC210	*D1
C217	*N2	C349	*M2	C479	*D4	C776	*N4	C909	J6	C1176	*J6	C1328	H6	C1730	*H2	C1829	*H3	C2049	*E2	C2155	*C3	C2256	*E5	C2435	*D6	C2702	*B3	C3414	*K2	CL2102	C4	FB205	*K1	IC211	*D1
C218	*M2	C350	*N2	C480	C4	C777	*N4	C910	K7	C1177	*K6	C1329	H6	C1731	*H2	C1830	*H3	C2050	*E2	C2156	*C3	C2257	*E6	C2436	*E6	C2703	*B2	C3415	*K2	CL2103	*C3	FB206	*J1	IC213	*N2
C219	*M2	C351	*M2	C481	C4	C778	*N4	C911	K6	C1178	*K6	C1330	H6	C1732	*H2	C1831	*H3	C2051	*E2	C2157	*C3	C2258	*D6	C2437	*D6	C2704	*B4	C3416	K2	CL2104	C2	FB207	*J1	IC214	*M2
C222	*H2	C352	*M2	C482	C4	C779	*N4	C912	*J7	C1179	*K6	C1331	H6	C1733	*G2	C1832	*H3	C2052	*E2	C2158	*C3	C2259	*F6	C2438	*D6	C2705	*C2	C3417	*K2	CL2105	*C2	FB208	*H1	IC215	L2
C223	*H2	C353	*L2	C483	C4	C780	*N4	C913	J7	C1180	*K6	C1332	H7	C1734	*J2	C1833	*H3	C2053	*E3	C2159	*C3	C2260	*E6	C2439	*D6	C2706	*D2	C3418	K2	CL2106	*C2	FB209	*H1	IC216	L2
C224	*K2	C354	*L2	C484	*D5	C781	*N3	C914	K6	C1181	*J5	C1333	H7	C1735	*H2	C1834	*H3	C2054	*E3	C2160	*B3	C2261	*D5	C2440	*D6	C2707	*A2	C3419	*K2	CL2107	*C2	FB210	*G1	IC217	J2
C225	*K2	C355	*K1	C485	*D5	C782	*N3	C915	*K7	C1182	*J5	C1334	H5	C1736	*J2	C1835	*H3	C2055	*E3	C2161	*B3	C2262	*F7	C2441	*E7	C2708	*B2	C3420	*K2	CL2108	*C2	FB211	*G1	IC218	J2
C228	*H2	C356	*K1	C486	*D5	C783	*M3	C916	J7	C1183	*J5	C1335	H5	C1737	*H3	C1836	*H3	C2056	*E3	C2162	*B3	C2263	F7	C2443	*C2	C2709	*B4	C3421	*K2	CL2109	*C2	FB212	*E1	IC219	H2
C229	*H2	C357	*J1	C487	*D5	C784	*M3	C917	J6	C1184	*K5	C1336	H5	C1738	*J3	C1837	*H3	C2057	*E3	C2163	*B3	C2264	F7	C2444	C2	C2710	*B4	C3422	*K2	CL2110	C2	FB213	*D1	IC220	G2
C232	*K2	C358	*J1	C488	*D5	C785	*M3	C918	*J6	C1185	*J5	C1337	H5	C1739	*G2	C1838	*H3	C2058	*E3	C2164	*B3	C2265	*E5	C2445	C1	C2800	*M6	C3423	*K2	CL2111	C2	FB214	*D1	IC221	D2
C233	*K2	C359	*H1	C489	*D5	C786	*N4	C919	*J7	C1186	*J6	C1338	H5	C1740	*G2	C1839	*H3	C2059	*E3	C2165	*B3	C2266	*F5	C2446	*P3	C2801	*M6	C3424	*K2	CL2112	*C2	FB215	*D1	IC222	C2
C236	*H2	C360	*H1	C490	*D5	C787	*N3	C920	J7	C1187	*K5	C1339	H5	C1741	*G2	C1840	*H3	C2060	*E3	C2166	*B3	C2267	C1	C2447	*L5	C2802	*M6	C3425	K2	CL2113	*C2	FB400	K3	IC400	K3
C238	*K2	C361	*G1	C491	D5	C788	*M3	C921	*J6	C1188	*J6	C1340	H6	C1742	*K2	C1841	*H3	C2061	*E3	C2167	*B3	C2268	C1	C2448	*J3	C2803	*F6	C3426	K2	CL2114	C3	FB401	K4	IC401	K3
C240	*H1	C362	*G1	C492	D5	C789	*M3	C922	J6	C1189	*J6	C1341	H6	C1743	*K2	C1842	*H3	C2062	*E3	C2168	*B3	C2269	D4	C2450	*P3	C2804	*F6	C3427	K2	CL2115	C3	FB402	*K2	IC402	K2
C242	*K1	C363	*K1	C493	D5	C790	*N3	C923	*J7	C1190	*J6	C1342	*H5	C1744	*K2	C1843	*H3	C2063	*E3	C2169	*B3	C2270	E4	C2451	*L5	C2805	*F6	C3428	*K2	CL2116	*C3	FB403	*P3	IC404	K3
C244	*H1	C364	*J1	C494	*D5	C791	*N3	C924	K5	C1191	*K6	C1343	*H5	C1745	*J2	C1844	*H3	C2064	*E3	C2170	*C3	C2271	D4	C2452	*J3	C2806	M6	C3429	*K2	CL2117	*C3	FB404	*P3	IC405	D4
C246	*K1	C365	*H1	C495	*D5	C792	*N3	C925	K5	C1192	*J5	C1344	*H6	C1746	*H2	C1845	*H3	C2071	*E2	C2171	*B3	C2272	E4	C2454	*C6	C2807	F6	C3430	K2	CL2118	*C3	FB405	*K3	IC406	D5
C248	*H1	C366	*G1	C496	*K3	C793	*N3	C926	*K5	C1193	*J5	C1345	*H6	C1747	*H2	C1846	*H3	C2072	*E2	C2172	*C3	C2273	B1	C2500	*F2	C2808	*M5	C3431	*K2	CL2119	*C3	FB406	*D4	IC407	D5
C249	*H1	C367	*M2	C501	*P3	C794	*N3	C927	K5	C1194	*J5	C1346	*H6	C1748	H2	C1847	*H3	C2073	*E2	C2173	*B3	C2274	B2	C2501	*F1	C2809	*F6	C3432	K2	CL2120	*C3	FB407	*C5	IC408	*D5
C252	*K1	C368	*L2	C605	M4	C795	*M3	C928	*K5	C1195	*J5	C1347	*H6	C1749	G2	C1848	*J3	C2074	*E2	C2174	*B3	C2275	B1	C2502	*F7	C2810	E6	C3433	*K2	CL2121	*C3	FB408	*D5	IC410	*D5
C253	*K1	C369	*D1	C606	*P4	C796	*N4	C929	K5	C1196	*K5	C1348	*H6	C1750	*K2	C1849	*J3	C2075	*E2	C2175	*B3	C2276	B2	C2503	*F7	C2811	E6	C3434	*K2	CL2301	*P6	FB409	*D5	IC411	K2
C256	*M2	C370	*E1	C607	M4	C797	*N3	C930	*K5	C1197	*K5	C1349	*H6	C1751	*J2	C1850	*H3	C2076	*E2	C2176	*B3	C2277	A2	C2504	F1	C2812	M5	C3435	*K2	CL2302	*P6	FB410	*K2	IC412	K2
C257	*M2	C400	*K3	C608	M4	C798	*N3	C931	K5	C1198	*K5	C1350	*H5	C1752	*J2	C1851	*J3	C2077	*E2	C2177	*B2	C2278	A2	C2505	F2	C2813	E6	C3436	*K2	CL2303	*P6	FB411	P2	IC414	P3
C258	*L2	C401	K3	C700	N2	C799	*N4	C1100	L6	C1200	L7	C1351	*H5	C1753	*H2	C1852	*H3	C2078	*E2	C2178	*B2	C2301	*P7	C2506	F2	C2814	*M5	C3437	*K2	CL2304	*G6	FB700	*N2	IC415	P2
C259	*L2	C402	*K3	C701	M2	C800	*M3	C1101	K7	C1201	L7	C1352	L4	C1754	*H2	C1853	*H3	C2079	*E3	C2179	*C3	C2302	*H7	C2507	F2	C2815	*F6	C3438	*K2	CL2305	*G6	FB701	*M2	IC501	*P4
C260	*J2	C403	*K3	C702	P2	C801	*M4	C1102	*J6	C1202	K7	C1353	L3	C1755	*G2	C1854	*H3	C2080	*E3	C2180	*C3	C2303	*P7	C2508	*C6	C2816	*M5	C3439	P2	CL2306	*G6	FB702	*P2	IC1111	E3
C261	*J2	C404	*K3	C703	*N4	C802	*N3	C1103	K6	C1203	K7	C1354	*L4	C1756	*H2	C1855	*H3	C2081	*E3	C2181	*C3	C2304	*H7	C2509	*C6	C2817	*M5	C3440	*P2	CL2401	*D6	FB703	P3	IC1200	*L7
C262	*G2	C405	*K3	C704	*N3	C803	*M4	C1104	*K5	C1204	L6	C1355	*L3	C1757	*G2	C1856	*H3	C2082	*E3	C2182	*C3	C2306	*P6	C2510	*C6	C2818	*F6	C3441	P2	CL2402	*D6	FB704	*N2	IC1201	L7
C263	*G2	C406	*K3	C705	*N2	C804	*N3	C1105	J5	C1205	K7	C1356	*L3	C1758	*H3	C1857	*H3	C2083	*E3	C2183	*A2	C2307	*P6	C2511	*C6	C2819	*F6	C3442	P2	CL2403	*D6	FB705	*M4	IC1300	*L4
C264	*L2	C407	K3	C706	*N2	C805	*N3	C1106	*K6	C1206	*L7	C1357	L4	C1759	*J3	C1858	*J3	C2084	*E3	C2184	*B4	C2308	*P6	C2512	G2	C2820	*M5	C3443	P2	CL2404	*D7	FB706	*N4	IC1301	L4
C265	*L2	C408	*K3	C707	*N2	C806	*N4	C1107	*K6	C1207	*L7	C1358	L4	C1760	*H2	C1859	*J3	C2085	*E3	C2185	A3	C2309	*P6	C2513	*C6	C2821	*M5	C3444	P2			FB707	*N3	IC1302	L3
C266	*M2	C409	*K3	C708	*M2	C807	*N3	C1108	*K6	C1208	*K7	C1359	H7	C1761	*G2	C1860	*J3	C2086	*E3	C2186	*A3	C2310	*N6	C2514	*C6	C2822	*F6	C3445	P1	CN10	M7	FB708	*M3	IC1303	H6
C267	*M2	C410	K4	C709	*M2	C808	*N3	C1109	*K5	C1209	*L7	C1360	H6	C1762	*H2	C1861	*J3	C2087	*E3	C2187	B3	C2311	*P6	C2515	*F7	C2823	*F6	C3446	P1	CN11	H7	FB709	*M4	IC1304	H5
C268	*J2	C411	*

IC1506	*F3	L223	*D1	R131	E6	R261	*H1	R434	D5	R633	*M3	R749	M4	R1027	H7	R1183	J6	R1510	F3	R1675	J4	R1925	D2	R2107	B3	R2242	*E5	R2348	*N6	R2508	*C5	R3004	*B1	RB507	M4	RB2507	*C7
IC1507	*F3	L224	*D1	R132	D5	R264	*K1	R435	D5	R634	*M3	R750	M4	R1032	*J5	R1184	L5	R1511	F2	R1676	J4	R1926	D3	R2108	B3	R2243	*F5	R2349	*G6	R2509	*C6	R3005	*B2	RB508	M4	RB2508	D7
IC2000	H3	L226	*D1	R133	D5	R266	*H1	R436	C4	R635	N3	R751	M4	R1033	J5	R1185	L6	R1512	F3	R1677	*H3	R1927	D3	R2109	B3	R2244	*E5	R2350	*G6	R2510	*F7	R3006	B1	RB509	M4	RB2509	*E7
IC2100	C3	L227	*G1	R134	E6	R267	*H1	R437	C4	R636	P3	R752	*N3	R1034	J5	R1186	*K6	R1513	F3	R1678	*H3	R1928	D2	R2110	A3	R2245	*E5	R2351	*N6	R2511	*F7	R3007	*B1	RB510	*M4		
IC2101	B3	L228	*M2	R135	D5	R270	*K1	R438	C4	R637	P3	R753	*N3	R1035	*J5	R1187	*L6	R1514	F3	R1679	*H3	R1929	D3	R2111	*A3	R2246	*E5	R2352	*N6	R2512	*C6	R3008	B2	RB511	*M4	RV2200	B1
IC2103	*C2	L229	*L2	R136	*N7	R271	*K1	R439	C4	R638	N3	R754	*N3	R1036	*J6	R1188	L6	R1515	F3	R1680	*J3	R1930	D2	R2112	A3	R2247	*F5	R2353	*G6	R2513	*C6	R3009	*B2	RB512	L3	RV2201	B1
IC2105	*B3	L237	*J1	R137	*N7	R282	*M2	R440	C4	R639	N3	R755	*N3	R1037	*J5	R1189	*K7	R1516	F3	R1681	*J3	R1931	D3	R2113	*A3	R2248	*E5	R2354	*G6	R2514	*C6	R3010	B1	RB513	*L3	RV2202	C1
IC2200	*E4	L240	*D1	R138	*N7	R283	*L2	R441	D5	R640	N3	R756	*N3	R1038	J5	R1190	*L6	R1517	G3	R1682	J3	R1932	D3	R2114	B3	R2249	*E5	R2355	G6	R2515	*C5	R3011	*B1	RB514	*L3	RV2203	C1
IC2201	*E4	L2100	C2	R139	*N7	R284	*L2	R442	D5	R641	N3	R757	*N3	R1039	J5	R1191	*J5	R1518	G3	R1683	J4	R1933	D2	R2115	*B3	R2250	*E5	R2401	*C7	R2516	G1	R3012	*B2	RB515	L3		
IC2202	*E5	L2101	C2	R140	*N7	R285	*L2	R443	D5	R642	N3	R758	*N3	R1040	J5	R1192	*J6	R1519	F3	R1684	J4	R1934	D2	R2116	B3	R2251	*F5	R2402	*C7	R2517	*F7	R3013	*B1	RB516	L3	S501	N2
IC2203	*E5	L2200	E4	R141	*N7	R286	*J2	R450	K2	R643	N3	R759	*N3	R1041	J6	R1193	*J5	R1520	F3	R1685	H4	R1935	D2	R2117	*B3	R2252	*D5	R2403	*C6	R2518	*F7	R3014	*B2	RB517	*M4	S900	N6
IC2204	*D5	L2201	E4	R142	*N7	R287	*J2	R451	*K3	R644	N3	R760	*N3	R1042	*J5	R1194	*J5	R1521	F3	R1686	H4	R1936	D2	R2118	B3	R2253	*E5	R2404	*B7	R2519	*C6	R3015	*B1	RB518	*M4	S1400	L1
IC2205	*D5	L2202	*E5	R143	*N7	R288	*G2	R452	*K3	R645	N3	R761	*N3	R1043	*J5	R1195	*J6	R1522	F2	R1687	*J3	R1937	D2	R2119	*B3	R2254	*E6	R2405	*C6	R2520	*C6	R3016	B2	RB600	P3	S1900	E1
IC2206	*E5	L2203	*E5	R144	*M6	R289	*G2	R453	K3	R646	N3	R764	M3	R1044	*J5	R1196	*J6	R1523	F2	R1688	G3	R1938	D2	R2120	B3	R2255	*E6	R2406	*C6	R2521	*C6	R3017	B1	RB601	P3	S2401	E1
IC2207	*E5	L2204	*D5	R145	*M6	R292	*L2	R454	K3	R647	N3	R765	M3	R1045	*J5	R1200	L7	R1524	G2	R1689	*J3	R1939	D2	R2121	*B3	R2256	*D5	R2407	*C6	R2522	*C6	R3018	B2	RB602	*N3	S2402	D7
IC2208	*E5	L2205	*E5	R146	*M6	R295	*L2	R455	K3	R648	N3	R766	*P4	R1046	*J5	R1201	L7	R1525	G2	R1690	G3	R1940	D2	R2122	B3	R2257	*E5	R2408	*C7	R2523	*C6	R3019	B1	RB900	*M6		
IC2209	*D5	L2206	A2	R147	*M6	R296	*J2	R456	K2	R649	N3	R767	*P3	R1047	*J5	R1202	L7	R1526	G3	R1691	*J3	R1941	D2	R2123	*B3	R2258	*D5	R2409	*C7	R2524	*C6	R3020	B2	RB901	*J6	TP100	G7
IC2210	*D6	L2500	*F7	R148	*M6	R297	*L2	R457	K2	R650	N3	R768	*P3	R1056	J6	R1203	L7	R1527	G2	R1692	*J3	R1942	D2	R2124	B3	R2259	*D6	R2410	*E1	R2525	F1	R3021	B2	RB902	*J6	TP101	N6
IC2211	*E6	L2600	C5	R149	N7	R298	*G2	R458	K2	R651	N3	R769	M3	R1057	*J6	R1204	K7	R1528	*F3	R1693	G3	R1943	D2	R2125	*B3	R2260	*D6	R2411	*C6	R2526	F1	R3022	B1	RB903	*J5	TP501	P1
IC2212	*F7	L2601	C6	R150	N7	R299	*M2	R460	K2	R652	M3	R770	M3	R1058	*K6	R1205	K7	R1529	*F3	R1694	G3	R1944	D2	R2126	B3	R2261	*E6	R2412	*C6	R2527	G1	R3023	B1	RB904	*J5	TP502	P1
IC2213	F7	L2602	C7	R151	N7	R301	*J2	R461	K2	R653	M3	R771	M3	R1100	L6	R1206	K7	R1530	*F3	R1695	H3	R1945	D2	R2127	*B3	R2262	*D6	R2413	*C6	R2528	G2	R3024	B2	RB905	J5	TP503	N1
IC2214	*E6	L2604	B5	R152	*M6	R305	*G2	R462	K2	R654	M4	R772	N3	R1101	K7	R1207	K7	R1531	*F3	R1696	H3	R1946	D2	R2128	B3	R2263	*E6	R2414	*C5	R2529	G2	R3025	B2	RB906	J5	TP504	N1
IC2215	*D5	L2609	A6	R153	*M6	R306	*L2	R463	*K2	R655	M4	R773	N3	R1102	K6	R1208	K7	R1532	*G3	R1697	*H3	R1947	D2	R2129	*B3	R2264	*D6	R2415	*C5	R2530	G2	R3026	B1	RB907	J5	TP900	N6
IC2216	F7	L2610	B5	R154	*M6	R307	*L2	R464	*P1	R656	M4	R774	*N3	R1103	K7	R1209	K7	R1533	*G2	R1698	*H3	R1948	D2	R2130	B3	R2265	*E6	R2416	*C5	R2534	*F7	R3027	B1	RB908	J6	TP901	N6
IC2217	C1	L2620	G4	R155	*M6	R308	*J1	R465	*P2	R657	M4	R775	*N3	R1104	*J6	R1210	*K7	R1600	J2	R1699	*H3	R1949	D2	R2131	*B3	R2266	*D5	R2417	*C5	R2535	*F7	R3028	B2	RB909	J6	TP902	N6
IC2218	B2	L2621	F4	R156	*M6	R309	*G1	R466	*P3	R658	M4	R776	*N3	R1105	K6	R1211	*K7	R1601	*J2	R1700	*H3	R1950	D2	R2132	B3	R2267	*D5	R2418	*C5	R2536	*F7	R3029	B1	RB910	J6	TP903	N5
IC2219	B2	L2622	N5	R157	*M6	R310	*L2	R467	*P3	R659	P3	R777	*N3	R1106	*J6	R1212	*K7	R1602	*H3	R1701	*H3	R1951	D2	R2133	*B3	R2268	*D5	R2419	*C5	R2537	*C6	R3030	B2	RB911	J6	TP1400	F1
IC2221	B1	L2623	N5	R158	*M6	R311	*M2	R476	*K2	R660	P3	R778	*M3	R1107	K6	R1213	*L7	R1603	J2	R1702	*H3	R1952	D2	R2134	*C2	R2269	*D5	R2420	*C5	R2538	*C6	R3031	B1	RB912	J6	TP1401	F1
IC2301	P6	L2624	H4	R159	*M6	R312	*J1	R477	*K2	R661	P3	R779	*M3	R1108	*K5	R1215	*L7	R1604	*J3	R1703	*H3	R1953	D2	R2135	*C2	R2270	*E6	R2421	*C5	R2539	*C6	R3032	B2	RB913	*H6	TP1402	F1
IC2302	G6	L2625	H4	R162	*M7	R313	*L2	R478	K2	R662	P3	R780	M3	R1109	J5	R1216	*L7	R1605	*H3	R1704	*H3	R1954	D2	R2136	*C2	R2271	*F6	R2422	*C5	R2540	*F2	R3033	B2	RB914	H7	TP1403	F1
IC2303	*P7	L2627	M5	R163	N7	R314	*G1	R479	K2	R663	P3	R781	M3	R1110	*K5	R1217	*L7	R1606	J2	R1705	*H3	R1955	D2	R2137	*C2	R2272	*E6	R2423	*C5	R2541	*F2	R3034	B2	RB915	H7	TP1900	E1
IC2304	*G7	L2628	F6	R164	M7	R315	*L2	R480	K2	R664	P3	R900	*K6	R1111	J5	R1218	*L7	R1607	J2	R1706	*H3	R1956	D2	R2138	*C2	R2273	*D5	R2424	*C5	R2542	*F2	R3035	A2	RB916	*H6	TP1901	E1
IC2400	D6			R165	*N7	R316	*J1	R481	K2	R665	P4	R901	J6	R1113	J5	R1219	*M7	R1608	J2	R1707	J3	R1957	D2	R2139	*C3	R2274	*F6	R2425	*C5	R2543	*F1	R3036	B2	RB917	*H6	TP1902	E1
IC2401	*C6	Q400	*K2	R166	N7	R317	*G1	R482	K2	R666	P4	R902	K7	R1114	L6	R1220	*L7	R1609	J2	R1708	J3	R1958	D2	R2140	*C3	R2275	*D5	R2426	*C5	R2544	*F1	R3037	B2	RB1100	*L6	TP1903	E1
IC2402	*B7	Q401	*P3	R167	M7	R318	*L2	R483	K2	R667	N4	R904	*K6	R1115	L6	R1300	*M3	R1610	J2	R1709	J3	R1959	D2	R2141	*C2	R2276	*E5	R2427	*D6	R2545	*F1	R3038	B1	RB1101	*L6	TP2100	D3
IC2403	*C7	Q402	*P3	R168	*M7	R320	*M2	R484	*K3	R668	N4	R905	J6	R1116	L6	R1301	*M3	R1611	J2	R1710	J3	R1960	D2	R2142	*C2	R2277	*C1	R2429	D6	R2546	*F1	R3039	B1	RB1102	*L7	TP2101	D3
IC2404	*C7	Q403	*K3	R169	M7	R322	*J1	R485	*K3	R669	M4	R906	K7	R1117	*K6	R1302	*L3	R1612	J2	R1715	*H3	R1961	D2	R2143	*C4	R2278	*C1	R2430	D6	R2547	*F1	R3040	B1	RB1103	L5	TP2200	E5
IC2405	*D6	Q404	*D5	R170	M7	R324	*G1	R486	K3	R670	P4	R908	K7	R1118	J5	R1303	*L4	R1613	J2	R1716	J4	R1962	D3	R2144	*C4	R2282	E4	R2431	D6	R2548	G1	R3041	B1	RB1400	*L1	TP2201	E5
IC2406	*B7	Q405	*D5	R171	*M7	R325	*G1	R487	K3	R671	P4	R909	J7	R1119	*K6	R1304	*L4	R1614	H2	R1717	*H4	R1963	F3	R2145	*C4	R2283	*C1	R2432	D6	R2549	G1	R3042	*F7	RB1600	J4	TP2300	N6
IC2407	*B6	Q2200	*E5	R172	M7	R330	*L2	R488	D4	R672	*N3	R910	K6	R1120	*K6	R1307	*L4	R1615	H2	R1718	*H4	R1964	F3	R2146	C4	R2284	*C1	R2433	D6	R2550	G1	R3043	F7	RB1601	J4	TP2301	N6
IC2408	*C5	Q2201	*F5	R173	M7	R331	*M2	R489	D4	R673	*N3	R912	K7	R1121	*K6	R1308	L4	R1616	H2	R1719	*H4	R1965	F3	R2147	*C4	R2285	C1	R2434	*D6	R2551	*C4	R3044	F7	RB1900	*E1	TP2302	F5
IC2409	*B5			R174	*M7	R332	*J1	R490	D5	R674	N4	R913	J7	R1122	*K6	R1309	L4	R1617	J2	R1720	*H4	R1966	F3	R2148	C4	R2286	*E5	R2435	D6	R2552	*C4	R3045	B2	RB2003	*F2	TP2303	F5
IC2410	*B6	R1	P7	R175	M7	R333	*G1	R491	D5	R676	N4	R914	K6	R1123	J6	R1310	L4	R1618	H2	R1721	J4	R1967	F3	R2149	C4	R2287	*F5	R2436	*D6	R2553	*C4	R3046	B1	RB2100	B3	TP2401	D7
IC2411	*B6	R2	P7	R176	M7	R334	*D2	R492	K2	R677	P4	R916	K6	R1124	J6	R1311	L3	R1619	H2	R1722	J3	R1968	F3	R2150	*C3	R2288	C1	R2437	*D6	R2554	*C5	R3047	B2	RB2101	B3	TP2402	D7
IC2412	*E6	R3	*P7	R177	*M7	R335	*D2	R493	K2	R678	P4	R917	J6	R1125	*J6	R1312	L3	R1620	H2	R1723	J3	R1969	F3	R2151	C3	R2289	C1	R2438	D6	R2555	*C6	R3048	B1	RB2102	B3	TP2403	D7
IC2413	*C1	R4	*P7	R178	M7	R338	*D2	R494	P3	R679	M3	R918	K7	R1126	*J5	R1313	L3	R1621	H2	R1724	J3	R1970	F3	R2152	C3	R2290	C1	R2439	*D6	R2556	*C5	R3049	D4	RB2103	B3	TP2404	D7
IC2414	*D7	R5	P7	R179	M7	R339	*D2	R501	*P1	R680	M3	R919	K6	R1127	*J5	R1314	J6	R1622	H2	R1725	J3	R2000	*E2	R2153	C2	R2291	*B1	R2440	D6	R2557	*C5	R3050	E4	RB2104	*B3		
IC2415	*C2	R6	P7	R180	*M7	R347	*D2	R502	*P1	R681	M3	R920	K6	R1128	K5	R1315	J6	R1623	H2	R1726	H2	R2001	*E2	R2154	C2	R2292	*B1	R2441	D6	R2558	*C5	R3300	*K1	RB2105	*B3	X400	K2
IC2417	*C2	R7	*P7	R181	N7	R349	*D2	R503	*N1	R682	M3	R921	J6	R1129	K5	R1316	H7	R1624	H2	R1727	H2	R2002	*E2	R2155	C2	R2293	C1	R2442	D6	R2559	*C5	R3301	*H1	RB2106	*B3	X401	P3
IC2418	C2	R8	*P7	R182	*M7	R350	*D2	R504	*N1	R683	M4	R922	K7	R1130	K5	R1317	H7	R1625	H2	R1728	H2	R2003	*E2	R2156	C2	R2294	C1	R2443	D6	R2560	*C5	R3302	*K1	RB2107	*B3	X402	P3
IC2419	*P3	R9	P7	R183	N7	R354	*D2	R505	*P2	R684	M4	R923	K6	R1131	K5	R1318	H7	R1626	H2	R1729	H2	R2005	F3	R2157	C2	R2295	*D4	R2444	D6	R2561	*C5	R3303	*H1	RB2108	B3	X403	K3
IC2420	*L5	R10	P7	R184	*M7	R358	*D1	R506	*P2	R685	M3	R924	*K7	R1132	K5	R1321	H6	R1627	H2	R1730	J3	R2006	*E2	R2158	C3	R2296	*B1	R2445	*B6	R2562	*C5	R3304	*J1	RB2109	*B3	X404	D5
IC2421	*J3	R11	*P7	R185	*M7	R359	*D1	R507	*P2	R686	M3	R925	J7	R1133	K5	R1322	H6	R1628	H2	R1731	J3	R2007	F3	R2159	C4	R2297	*E4	R2446	*E7	R2563	*C4	R3306	*G1	RB2110	B3	X405	D5
IC2423	C1	R12	*P7	R186	*M7	R361	*E1	R508	*N2	R687	P4	R926	K6	R1134	K5	R1323	H6	R1629	H2	R1732	J2	R2008	*E2	R2160	C4	R2298	*B1	R2447	*D6	R2564	*C4	R3307	*L2	RB2111	*B3		
IC2500	*F2	R13	P7	R187	*M7	R362	*D1	R509	*P3	R688	P4	R927	*K7	R1135	K5	R1324	H5	R1630	H2	R1733	*J3	R2011	E3	R2161	*C4	R2301	N6	R2448	*D6	R2565	*B5	R3308	*L2	RB2112	C4	*:B SIDE	
IC2501	*F1	R14	P7	R188	N7	R363	*D1	R512	*N4	R689	*P4	R928	*J7	R1136	L6	R1325	*H5	R1631	H2	R1734	*H3	R2012	E3	R2162	*C4	R2302	*N6	R2449	*D6	R2566	*B5	R3313	L2	RB2113	C4		
IC2502	F2	R15	*P7	R189	N7	R365	*D1	R513	*N4	R690	*P3	R929	J7	R1137	*L6	R1326	*H5	R1632	H2	R1735	*H3	R2013	D3	R2163	C4	R2303	N6	R2450	*D6	R2567	*B4	R3314	L2	RB2114	*B4		
IC2503	*F7	R16	*P7	R190	N7	R367	*D1	R514	M3	R691	P4	R930	K6	R1138	L6	R1327	*H6	R1633	H2	R1736	*H3	R2014	D3	R2200	*E5	R2304	G6	R2451	*D6	R2568	*B4	R3315	K2	RB2115	B4		
IC2505	*E7	R17	N7	R191	N7	R368	*D1	R515	M3	R692	P4	R931	*K7	R1139	J5	R1328	*M4	R1634	J2	R1737	J3	R2015	F3	R2201	*E5	R2305	*G6	R2452	*D6	R2569	*B4	R3316	J2	RB2116	B4		
IC2506	*C6	R18	N7	R192	M7	R369	*D1	R516	M4	R693	N4	R932	K7	R1140	*L6	R1329	*M4	R1635	*H3	R1738	J2	R2016	F3	R2202	*E5	R2306	F6	R2453	*D6	R2570	*B4	R3317	H2	RB2117	B3		
IC2507	*F2	R19	*N7	R193	M7	R370	*D1	R517	M4	R694	N4	R933	J6	R1141	J5	R1330	*M4	R1636	H2	R1739	J2	R2017	E2	R2203	*E5	R2307	N5	R2454	*D6	R2571	*B4	R3318	G2	RB2118	B3		
IC2508	*F1	R20	*N7	R194	M7	R373	*D1	R518	*M4	R695	*P4	R934	J7	R1142	*J6	R1331	*M4	R1637	H2	R1740	*J2	R2018	E2	R2204	*E5	R2308	G6	R2455	*D6	R2572	*B4	R3319	D2	RB2200	*F7		
IC2509	*E7	R21	N7	R195	D5	R374	*D1	R519	*L3	R696	*P4	R935	J6	R1143	*J6	R1332	L4	R1638	H2	R1741	*J3	R2019	D3	R2205	*E5	R2309	P6	R2456	*D6	R2645	F5	R3320	D2	RB2201	*F7		
IC2510	*B5	R22	N7	R200	*N2	R376	*D1	R520	*P4	R697	N4	R936	*J6	R1144	J6	R1333	L4	R1639	H2	R1748	*J3	R2023	E3	R2206	*D4	R2310	G6	R2457	*D6	R2650	P5	R3321	*L2	RB2202	F7		
IC2511	*C7	R23	*N7	R201	*N2	R377	*D1	R521	*P4	R698	N4	R937	*J6	R1145	J6	R1334	*J5	R1640	H2	R1749	*J3	R2027	D3	R2207	*E4	R2311	P5	R2458	*D6	R2651	K5	R3322	*L2	RB2401	*B7		
IC2512	*C5	R24	*N7	R202	*N2	R379	*N2	R530	*M4	R699	N4	R938	*J7	R1146	*L5	R1335	*J5	R1641	H2	R1750	*J3	R2033	E3	R2208	*D4	R2312	P5	R2459	*D6	R2652	P5	R3323	*M2	RB2402	*B7		
IC2513	*C5	R25	N7	R203	*M2	R380	*N2	R531	P4	R700	N4	R939	*J7	R1147	*L6	R1336	*J6	R1642	J3	R1751	J2	R2039	*D3	R2209	*D4	R2313	P5	R2460	C1	R2653	J4	R3324	*L2	RB2403	*B7		
IC2514	*C5	R26	N7	R204	*M2	R381	*M2	R532	P4	R701	*M3	R940	J7	R1148	*L6	R1337	*J6	R1643	J3	R1752	J2	R2040	*D3	R2210	*D4	R2314	P5	R2461	*D6	R2654	J5	R3325	*K1	RB2404	*C7		
IC2515	*C5	R100	E7	R205	*N2	R382	*N2	R600	N3	R702	*M3	R941	J7	R1149	*L5	R1338	H6	R1644	*J2	R1753	*J3	R2041	E2	R2211	*E4	R2315	P5	R2462	*D6	R2655	P5	R3326	*J1	RB2405	*B7		
IC2516	*B5	R101	F7	R206	*M2	R383	*M2	R601	N3	R703	*M4	R942	*J6	R1150	*L5	R1339	*H5	R1645	*J2	R1754	*J3	R2042	E2	R2212	*E4	R2316	P5	R2463	*D6	R2656	P5	R3327	*J1	RB2406	*B7		
IC2600	A5	R102	*C6	R207	*M2	R384	*M2	R602	N3	R704	*M4	R943	*J6	R1154	L6	R1400	H4	R1646	J2	R1755	*G3	R2043	E2	R2213	*E4	R2317	P5	R2464	*C2	R2657	J5	R3328	*H1	RB2407	*C7		
IC2601	*A7	R103	E7	R208	*N2	R385	*M2	R603	*N3	R705	*M4	R944	J6	R1155	*L6	R1401	H4	R1647	J2	R1756	*G3	R2044	*E3	R2214	*D4	R2318	P5	R2465	*D6	R2659	F5	R3329	*G1	RB2408	*B7		
IC2602	*M5	R104	F7	R209	*M2	R386	*M2	R604	N3	R706	*M4	R945	J6	R1156	*L6	R1402	H4	R1648	H2	R1757	H2	R2045	E2	R2215	*D4	R2319	G6	R2466	*D7	R2660	F5	R3330	*D1	RB2409	*C7		
IC2603	*F6	R105	*C6	R210	*N2	R401	*K3	R605	N3	R707	M4	R946	*J7	R1157	*L6	R1403	H4	R1649	H2	R1758	H2	R2046	*E3	R2216	*E4	R2320	G6	R2467	*D7	R2661	*M6	R3331	*D1	RB2410	*B7		
IC2604	F4	R106	*C6	R212	*M2	R402	*K3	R606	*N3	R714	N3	R947	*J7	R1158	L6	R1404	H4	R1650	J2	R1900	F4	R2051	D3	R2217	*E4	R2321	G6	R2468	*D7	R2662	*M6	R3332	*M2	RB2411	*B7		
IC2605	*P2	R107	*B6	R213	*N2	R403	K3	R607	N3	R715	N4	R948	*L6	R1159	L6	R1405	H4	R1651	H2	R1901	F3	R2052	*E3	R2218	*B1	R2322	G6	R2469	*P3	R2663	*M5	R3333	*N2	RB2412	*B7		
IC2606	P5	R108	*B6	R214	*N2	R404	K3	R608	N3	R716	M3	R949	*K6	R1160	J6	R1406	H4	R1652	H2	R1902	F3	R2053	D3	R2219	*B1	R2323	G6	R2470	*P3	R2664	*M5	R3334	N2	RB2413	*B6		
IC2607	J4	R109	*B6	R217	*M2	R405	K3	R609	N3	R717	M3	R950	*K6	R1161	*J6	R1407	H4	R1653	H2	R1903	F3	R2054	D3	R2220	D4	R2324	G6	R2471	*P3	R2665	*M5	R3335	N2	RB2414	*B5		
IC2608	B2	R110	*C6	R218	*M2	R406	K3	R610	P3	R728	P4	R951	*K6	R1162	L5	R1408	H4	R1654	H2	R1904	F3	R2055	D2	R2221	E4	R2325	G6	R2472	*P3	R2666	*M5	R3336	N2	RB2415	*B5		
IC2609	*L5	R111	*C6	R222	*N2	R407	K3	R611	N3	R729	*N4	R952	K5	R1163	J6	R1409	H4	R1655	H2	R1905	F3	R2058	D3	R2222	*E5	R2326	G6	R2473	*L5	R2667	*M5	R3337	N2	RB2416	*C7		
IC2610	*G5	R112	*C6	R223	*N2	R408	K3	R612	N3	R730	P3	R953	K5	R1164	J6	R1410	H4	R1656	H4	R1906	F3	R2059	D3	R2223	*F5	R2327	*N7	R2474	*L4	R2668	*M5	R3338	M2	RB2417	*B5		
IC2611	*K4	R113	*B6	R224	*M2	R409	K3	R613	N3	R731	P3	R954	K5	R1165	*J6	R1411	H4	R1657	J4	R1907	F3	R2061	D3	R2224	*E5	R2328	*G7	R2475	*J3	R2669	*M5	R3339	M2	RB2418	*B6		
IC2612	B4	R114	*B6	R225	*M2	R410	K3	R614	N3	R732	P3	R955	K5	R1166	L6	R1448	*F1	R1658	J3	R1908	F3	R2062	D3	R2225	*F5	R2329	*N7	R2476	*J3	R2670	*M5	R3340	M2	RB2419	*C1		
IC2613	F5	R115	*B6	R226	*N2	R411	K3	R617	N3	R733	P3	R956	*K5	R1167	*J6	R1449	*F1	R1659	J3	R1909	F3	R2063	D3	R2226	*E5	R2330	*G7	R2479	*P3	R2671	*F6	R3341	M2	RB2420	*D7		
IC2614	A4	R116	D6	R227	*N2	R412	*P3	R618	N3	R734	P4	R957	*K5	R1168	L6	R1450	*F1	R1660	J3	R1910	F3	R2064	D3	R2227	*E5	R2331	*P7	R2480	*L4	R2672	*F6			RB2421	*C1		
IC2615	*D3	R117	D6	R228	*M2	R413	P3	R619	*N3	R735	*P3	R958	K5	R1169	L6	R1451	*F1	R1661	H3	R1911	F3	R2065	D3	R2228	*E5	R2332	*H7	R2481	*J3	R2673	*F6	RB100	*G7	RB2422	*D7		
IC3000	N4	R118	*C6	R229	*M2	R414	P3	R620	M3	R736	P4	R959	K5	R1170	L6	R1452	*L1	R1662	H3	R1912	*E2	R2070	F3	R2229	*E5	R2334	*N6	R2483	*P3	R2674	*F6	RB101	*G7	RB2423	*B7		
IC3001	K6	R119	*C6	R232	*H2	R415	P3	R621	N3	R737	*N4	R960	*K5	R1171	J5	R1453	*K1	R1663	H3	R1913	*E2	R2071	F3	R2230	*E5	R2335	*N6	R2484	*C6	R2675	*F6	RB102	G7	RB2424	*C7		
		R120	*C6	R233	*H2	R416	P3	R622	N3	R738	N3	R961	*K5	R1172	*J5	R1454	*K1	R1664	J3	R1914	*E2	R2072	E3	R2231	*E5	R2336	*N6	R2485	*C1	R2676	*F6	RB103	G7	RB2425	*B7		
L200	*N2	R121	*B6	R234	*K2	R417	P3	R623	N3	R739	N3	R962	K5	R1173	J6	R1455	*K1	R1665	J3	R1915	*E2	R2076	*E3	R2232	*E5	R2337	*N6	R2486	D6	R2677	*F6	RB104	*N7	RB2426	*B6		
L201	*M2	R122	*B6	R235	*K2	R418	P3	R624	N3	R740	N3	R963	K5	R1174	*J6	R1456	J3	R1666	H3	R1916	*E1	R2077

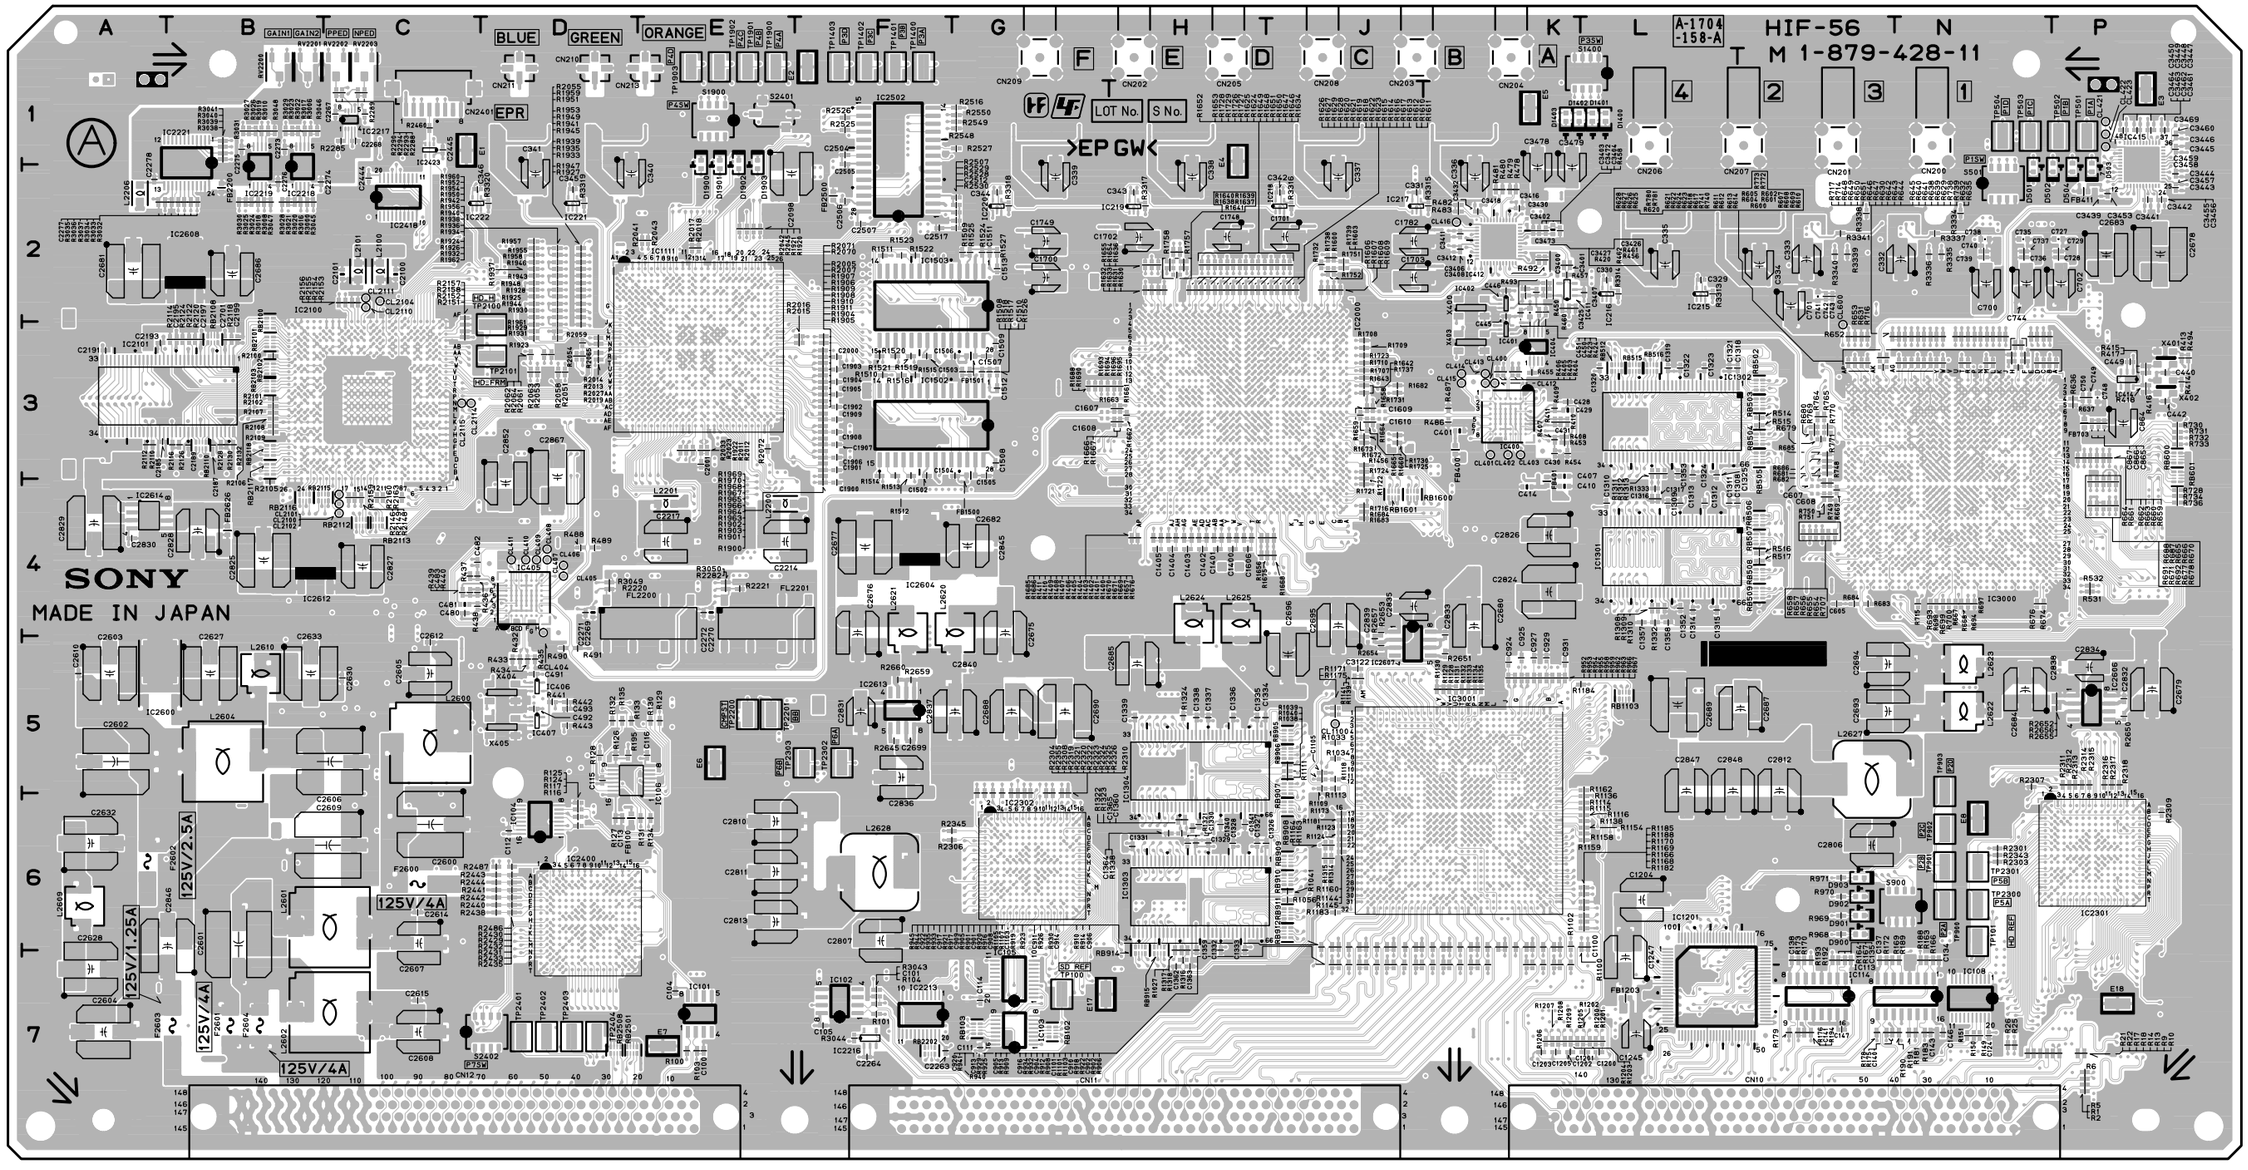

HIF-56 -A SIDE-
SUFFIX: -11

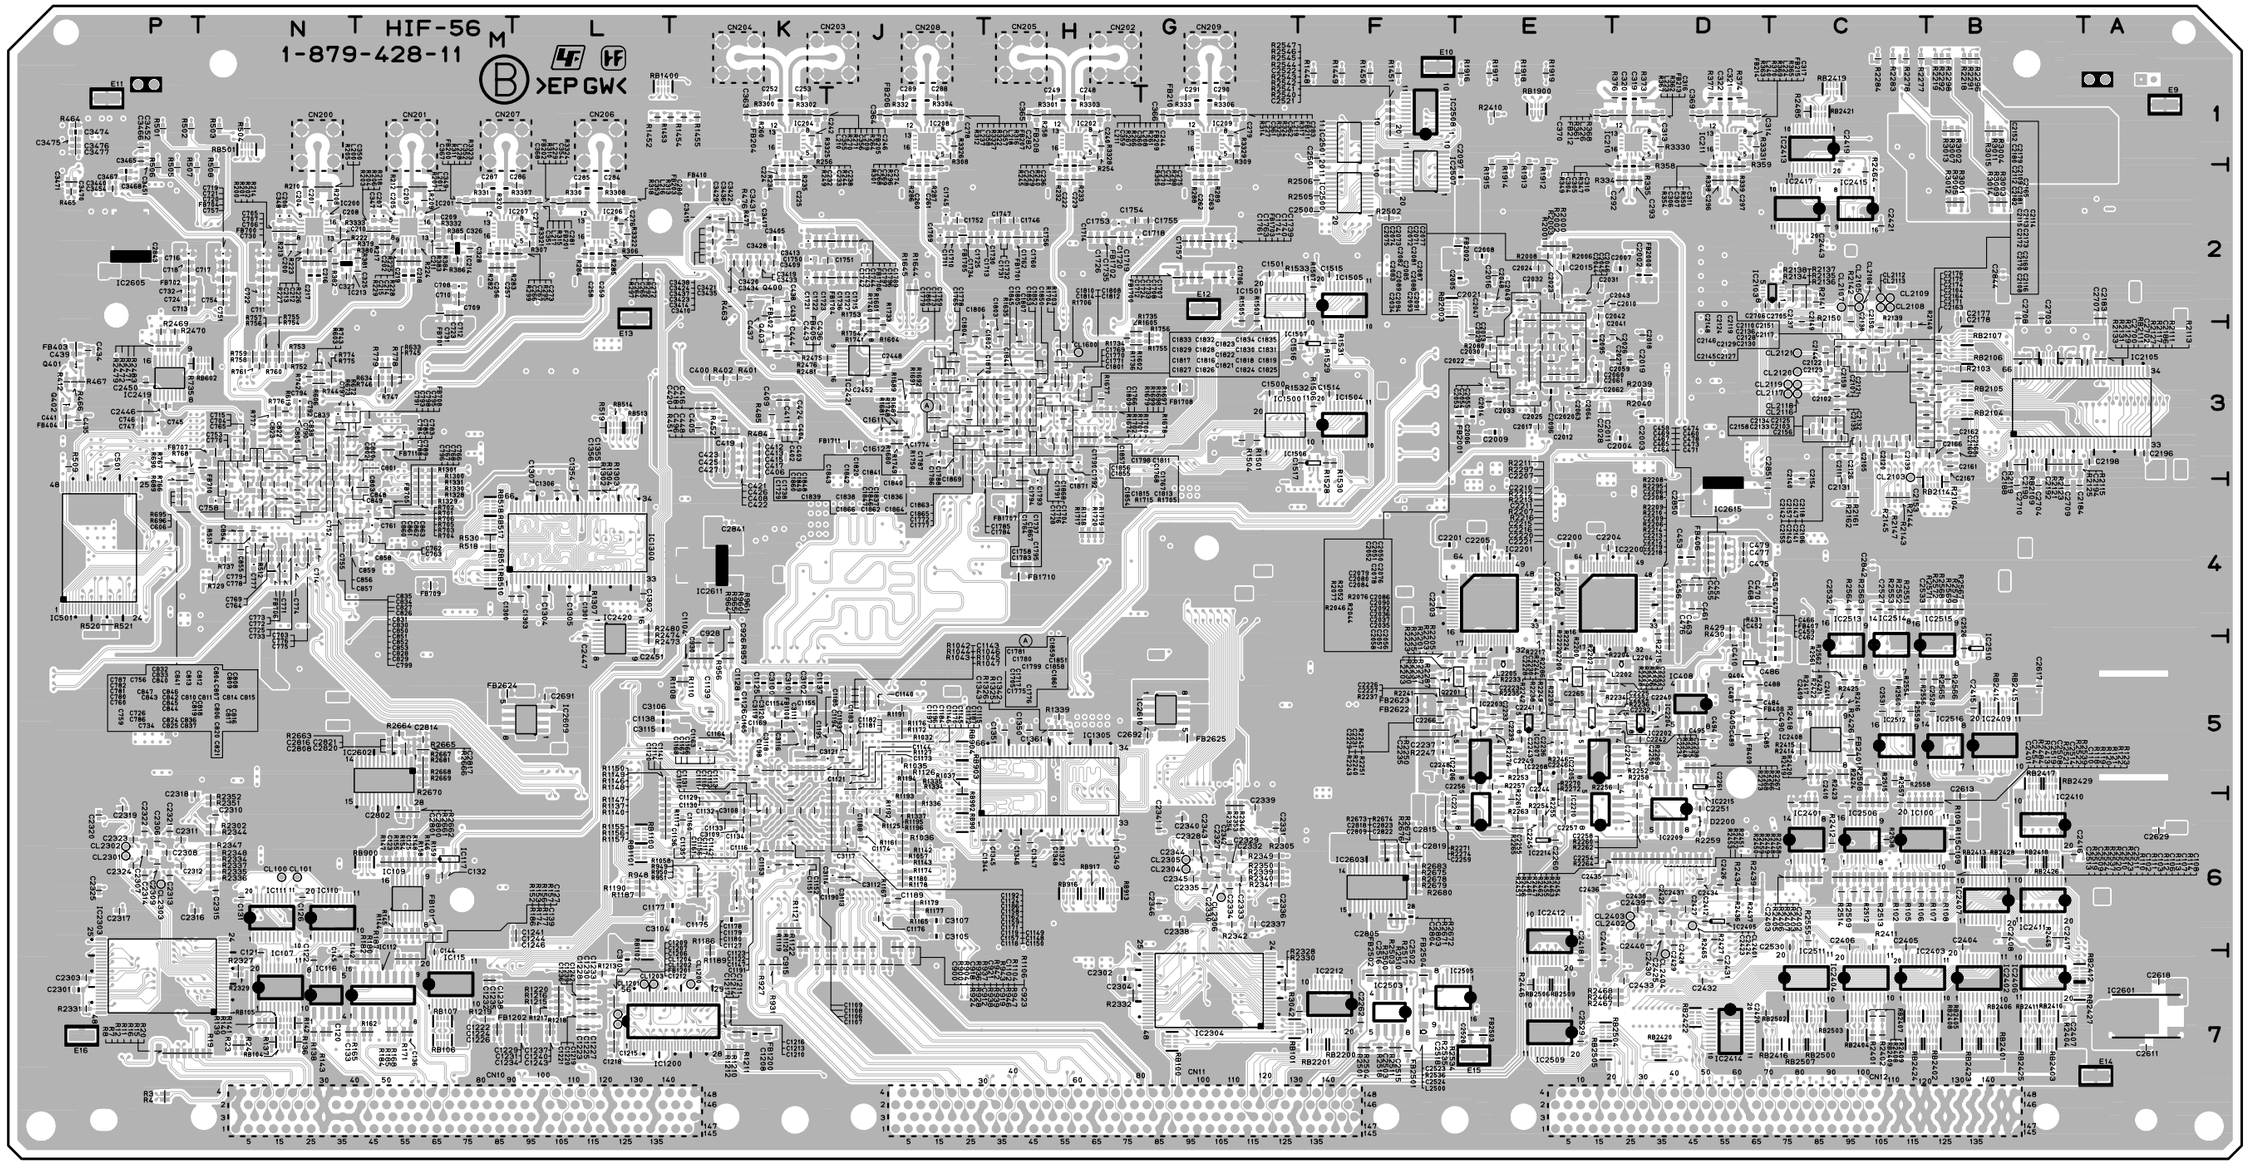

HIF-56 -B SIDE-
SUFFIX: -11

HIF-56 (1-879-428-12)

C100	E7	C275	*G2	C418	*K3	C711	*N2	C810	*N4	C1111	*K6	C1211	*K7	C1362	H7	C1760	*H2	C1859	*J3	C2085	*E3	C2185	A3	C2309	*P6	C2513	*C6	C2824	K4	C3442	P2	CL2403	*D6	FB705	*M4
C101	F7	C276	*L2	C419	*K3	C712	*M2	C811	*N4	C1112	*K6	C1212	*L7	C1363	H7	C1761	*G2	C1860	*J3	C2086	*E3	C2186	*A3	C2310	*N6	C2514	*C6	C2825	B4	C3443	P2	CL2404	*D7	FB706	*N4
C102	*C6	C277	*L2	C420	*K3	C713	*P2	C812	*N3	C1113	*K6	C1213	*K7	C1364	H6	C1762	*H2	C1861	*J3	C2087	*E3	C2187	B3	C2311	*P6	C2515	*F7	C2826	K4	C3444	P2			FB707	*N3
C103	*C6	C278	*J1	C421	*K3	C714	*N4	C813	*N3	C1114	*K5	C1214	*K7	C1365	H6	C1763	*G2	C1862	*H3	C2088	*E3	C2188	*B3	C2312	*P6	C2516	*F7	C2827	C4	C3445	P1	CN10	M7	FB708	*M3
C104	E7	C279	*G1	C422	*K3	C715	*N3	C814	*N4	C1115	*K5	C1215	*L7	C1400	H4	C1764	*H3	C1863	*J3	C2089	*E3	C2189	B3	C2313	*P6	C2517	F2	C2828	B4	C3446	P1	CN11	H7	FB709	*M4
C105	F7	C280	*L2	C423	*K3	C716	*P2	C815	*N4	C1116	*K6	C1216	*K7	C1401	H4	C1765	*J3	C1864	*H3	C2090	*E3	C2190	*B3	C2314	*P6	C2518	*F7	C2829	A4	C3447	P1	CN12	C7	FB710	*N3
C106	*B6	C281	*L2	C424	*K3	C717	*P2	C816	*N4	C1117	*K6	C1217	*K7	C1402	H4	C1766	*H3	C1865	*J3	C2091	*E3	C2191	A3	C2315	*N6	C2519	*C6	C2830	A4	C3448	P1	CN200	N1	FB711	*M3
C107	*B6	C282	*J1	C425	*K3	C718	*P2	C817	*N4	C1118	*J6	C1218	*L7	C1403	H4	C1767	*H3	C1866	*H3	C2092	*E3	C2192	*B3	C2316	*P6	C2520	*E7	C2831	F5	C3449	P1	CN201	M1	FB1100	*K5
C108	*B6	C283	*G1	C426	*K3	C719	*N2	C818	*N4	C1119	*J6	C1219	*L7	C1404	H4	C1768	*H3	C1867	*H3	C2093	*E3	C2193	A3	C2317	*P6	C2521	*F2	C2832	P5	C3450	P1	CN202	H1	FB1200	*K7
C109	*B6	C284	*L2	C427	*K3	C720	*N2	C819	*N4	C1120	*K5	C1220	*L7	C1405	H4	C1769	*H3	C1868	*H3	C2094	*E3	C2194	*B3	C2318	*P6	C2522	*F1	C2833	K4	C3451	*P1	CN203	J1	FB1201	*L7
C110	*C6	C285	*L2	C428	K3	C721	*N2	C820	*N4	C1121	*J5	C1221	*L7	C1500	*G3	C1770	*H3	C1869	*J3	C2095	*E3	C2195	B3	C2319	*P6	C2523	*F7	C2834	P5	C3452	*P1	CN204	K1	FB1202	*L7
C111	G7	C286	*M2	C429	K3	C722	*N2	C821	*N4	C1122	*K6	C1222	*M7	C1501	*G2	C1771	*H3	C1870	*J3	C2096	*E3	C2196	*A3	C2320	*P6	C2524	*F7	C2835	J4	C3453	P2	CN205	H1	FB1203	L7
C112	D6	C287	*M2	C430	K3	C723	*M2	C822	*N3	C1123	*K6	C1223	*L7	C1502	F3	C1772	*J3	C1871	*H4	C2097	*E2	C2197	B3	C2321	*P6	C2526	*B5	C2836	F5	C3454	*P2	CN206	L1	FB1500	G3
C113	D6	C288	*J1	C431	K3	C724	*P2	C823	*N3	C1124	*J5	C1224	*M7	C1503	F3	C1773	*J3	C1900	F4	C2098	E2	C2198	*A3	C2322	*P6	C2527	*C4	C2837	G5	C3455	P2	CN207	M1	FB1501	G3
C114	G7	C289	*J1	C433	*K2	C725	*N4	C824	*N4	C1125	*K5	C1225	*L7	C1504	G3	C1774	*J3	C1901	F3	C2100	C2	C2199	B3	C2323	*P6	C2528	*B5	C2838	P5	C3456	P2	CN208	J1	FB1700	*G2
C115	D5	C290	*G1	C434	*P3	C726	*N4	C825	*N4	C1126	*K5	C1226	*M7	C1505	G3	C1775	*J3	C1902	F3	C2101	C2	C2200	*E4	C2324	*P6	C2529	*E7	C2839	J5	C3457	P2	CN209	G1	FB1701	*H2
C116	E5	C291	*G1	C435	*P3	C727	P2	C826	*N3	C1127	*K6	C1227	*L7	C1506	G3	C1776	*J3	C1903	F3	C2102	*C3	C2201	*F4	C2325	*P6	C2530	*C6	C2840	G5	C3458	P2	CN210	D1	FB1702	*H2
C120	*N7	C292	*D2	C436	*K3	C728	P2	C827	*N3	C1128	*K5	C1228	*L7	C1507	G3	C1777	*J3	C1904	F3	C2103	*C3	C2202	*E4	C2327	*G6	C2531	*C5	C2841	*K4	C3459	P1	CN211	D1	FB1703	*G2
C121	*N7	C293	*D2	C437	*K2	C729	P2	C828	*N4	C1129	*K6	C1229	*L7	C1508	G3	C1778	*J3	C1905	F3	C2104	*B3	C2203	*F4	C2328	*G6	C2532	*C4	C2842	*C4	C3460	P1	CN213	E1	FB1704	*J2
C122	*N7	C296	*D2	C438	*K2	C730	*N2	C829	*N4	C1130	*K6	C1230	*L7	C1509	G3	C1779	*J3	C1906	F3	C2105	*C3	C2204	*E4	C2329	*G6	C2533	*C4	C2843	*P2	C3461	P1	CN2401	C1	FB1705	*J2
C123	*M6	C297	*D2	C439	*P3	C731	*M2	C830	*N3	C1131	*K6	C1231	*L7	C1510	G3	C1780	*J3	C1907	F3	C2106	*C3	C2205	*E4	C2330	*G6	C2601	B6	C2844	*B2	C3462	P1			FB1706	*J2
C124	N7	C304	*D2	C440	P3	C732	*P2	C831	*N3	C1132	*K6	C1232	*M7	C1511	G2	C1781	*J3	C1908	F3	C2107	*C3	C2206	*D4	C2331	*G6	C2602	A5	C2845	G4	C3463	P1	D501	N2	FB1707	*H4
C125	*M6	C305	*D2	C441	*P3	C733	*N4	C832	*N3	C1133	*K6	C1233	*L7	C1512	G3	C1782	J2	C1909	F3	C2108	*C3	C2207	*E4	C2332	*G6	C2603	A5	C2846	B6	C3464	P1	D502	P2	FB1708	*G3
C126	*N6	C306	*D2	C442	P3	C734	*N4	C833	*N3	C1134	*K6	C1234	*L7	C1513	G2	C1783	*H4	C2000	F3	C2109	*C3	C2208	*D4	C2333	*G6	C2604	A7	C2847	L5	C3465	*P1	D503	P2	FB1710	*H4
C127	*M6	C307	*D2	C443	*K3	C735	N2	C834	*N3	C1135	*K6	C1235	*M7	C1514	*F3	C1784	*H4	C2001	E3	C2110	*C3	C2209	*D4	C2334	*G6	C2606	C5	C2848	L5	C3466	*P1	D504	P2	FB1711	*J3
C131	*N6	C310	*D2	C444	*K3	C736	N2	C835	*N3	C1136	*K6	C1236	*L7	C1515	*F2	C1785	*H3	C2002	*D2	C2111	*C3	C2210	*E4	C2335	*G6	C2607	C6	C2850	*D4	C3467	*P2	D900	M6	FB2000	*D2
C132	*M6	C311	*D2	C445	K2	C737	N2	C836	*N4	C1137	*J5	C1237	*L7	C1516	*F3	C1786	*J3	C2003	*D3	C2112	*C3	C2211	*E4	C2336	*G6	C2608	C7	C2851	*D4	C3468	*P2	D901	M6	FB2001	*E3
C133	*N7	C313	*D1	C446	K2	C738	N2	C837	*N4	C1138	*L5	C1238	*M7	C1517	*F3	C1787	*J3	C2004	*D3	C2113	*B3	C2212	*D4	C2337	*G6	C2609	C6	C2852	D4	C3469	P1	D902	M6	FB2002	*E2
C134	N7	C314	*D1	C448	*K3	C739	N2	C838	*N3	C1139	*K5	C1239	*L7	C1606	H4	C1788	*J3	C2005	*E2	C2114	*B3	C2213	*D4	C2338	*G6	C2610	A5	C2867	D3	C3470	*P2	D903	M6	FB2200	B2
C135	M7	C316	*D1	C449	P3	C740	N2	C839	*N3	C1140	*J5	C1240	*L7	C1607	G3	C1789	*J2	C2006	*E3	C2115	*C3	C2214	E4	C2339	*G6	C2611	*A7	C2868	C6	C3471	*P2	D1400	L1	FL2200	E4
C136	*M7	C317	*D1	C450	K2	C741	M2	C840	*N3	C1141	*K5	C1241	*L6	C1608	G3	C1790	*H3	C2007	*D2	C2116	*B3	C2215	*E4	C2340	*G6	C2613	*B6	C2869	C6	C3472	K2	D1401	L1	FL2201	E4
C137	M7	C319	*D1	C451	K2	C742	M2	C841	*N3	C1142	*K6	C1242	*L7	C1609	J3	C1791	*H3	C2008	*E2	C2117	*C3	C2216	*E4	C2341	*G6	C2614	C6	C2870	C6	C3473	K2	D1402	K1	FB2401	*C5
C138	M7	C320	*D1	C452	*D5	C743	M2	C842	*N4	C1143	*J5	C1243	*L7	C1610	J3	C1792	*H3	C2009	*E3	C2118	*C3	C2217	E4	C2342	*G6	C2615	C7	C2871	C5	C3474	*P1	D1403	K1	FB2500	F2
C139	*M7	C321	*D1	C453	*D4	C744	N2	C843	*N4	C1144	*J5	C1244	*L6	C1611	*J3	C1793	*H4	C2010	*D2	C2119	*C3	C2218	*D5	C2343	*G6	C2617	*B5	C2872	C6	C3475	*P1	D1900	E2	FB2501	*F7
C140	M7	C322	*D1	C454	*D4	C745	*P3	C844	*N4	C1145	*K5	C1245	L7	C1612	*J3	C1794	*H4	C2011	*E3	C2120	*C3	C2219	*D5	C2344	*G6	C2618	*A7	C3100	*K5	C3476	*P1	D1901	E2	FB2502	*F7
C141	M7	C325	*M2	C455	*D4	C746	*P3	C845	*N4	C1146	*K5	C1246	*L6	C1613	J2	C1795	*H4	C2012	*E3	C2121	*C3	C2220	*E5	C2345	*G6	C2627	B5	C3101	*K5	C3477	*P1	D1902	E2	FB2503	*E7
C142	*M7	C326	*M2	C456	*D4	C747	*P3	C846	*N3	C1147	*K6	C1247	L7	C1614	J2	C1796	*J2	C2013	*E3	C2122	*C3	C2221	*E5	C2346	*G6	C2628	A7	C3102	*K5	C3478	K2	D1903	E2	FB2504	*F7
C143	N7	C327	*N2	C457	*C4	C748	P3	C847	*N3	C1148	*J6	C1300	*M4	C1615	*G3	C1797	*J2	C2014	*E3	C2123	*C3	C2222	*D5	C2401	*C6	C2629	*A6	C3103	*L7	C3479	K2	D2200	*D6	FB2622	*F5
C144	*M7	C328	*M2	C458	*D4	C749	P3	C848	*N3	C1149	*J6	C1301	*L4	C1616	*G3	C1798	*H3	C2015	*E2	C2124	*C3	C2223	*E5	C2402	*C6	C2630	C5	C3104	*K6			D2600	C6	FB2623	*F5
C145	*N7	C329	L2	C459	*C5	C750	P3	C849	*N4	C1150	*J6	C1302	*L4	C1700	G2	C1799	*J3	C2016	*E2	C2125	*C3	C2224	*E5	C2403	*C6	C2632	A6	C3105	*J6	CL100	*N6			FB2624	*M5
C146	N7	C330	L2	C460	*D4	C751	*N2	C850	*N3	C1151	*K6	C1303	*L4	C1701	J2	C1800	*J3	C2017	*E3	C2126	*C3	C2225	*E5	C2404	*B6	C2633	B5	C3106	*L5	CL101	*N6	E1	C1	FB2625	*G5
C147	M7	C331	J2	C461	*D4	C752	*N4	C851	*N4	C1152	*K6	C1304	*L4	C1702	H2	C1801	*H3	C2018	*D3	C2127	*C3	C2226	*E5	C2405	*C6	C2675	G4	C3107	*J6	CL400	K3	E2	F1	FB2626	B4
C200	*N2	C332	N2	C462	*C5	C753	*N3	C852	*N4	C1153	*K6	C1305	*L4	C1703	J2	C1802	*J3	C2019	*D3	C2128	*C3	C2227	*E5	C2406	*C6	C2676	F4	C3108	*K6	CL401	K3	E3	P1		
C201	*N2	C333	M2	C463	*D4	C754	*N2	C853	*N4	C1154	*K5	C1306	*L4	C1704	*H3	C1803	*H3	C2020	*E3	C2129	*C3	C2228	*E5	C2407	*B7	C2677	F4	C3109	*K6	CL402	K3	E4	H1	IC100	*C6
C202	*M2	C334	M2	C464	*D4	C755	*N4	C854	*N4	C1155	*K5	C1307	*L4	C1705	*J3	C1804	*J3	C2021	*E2	C2130	*C3	C2229	*F5	C2408	*B6	C2678	P2	C3110	*K5	CL403	K3	E5	K1	IC101	E7
C203	*M2	C335	L2	C465	*D4	C756	*N3	C855	*N4	C1156	*K6	C1308	L4	C1706	*G2	C1805	*H3	C2022	*E3	C2131	*C4	C2230	*E5	C2409	*C5	C2679	P5	C3111	*K5	CL404	D4	E6	E5	IC102	F7
C204	*N2	C336	K2	C466	*C4	C757	*N2	C856	*N4	C1157	*J6	C1309	L4	C1707	*G2	C1806	*H3	C2023	*E2	C2132	*C3	C2231	*F5	C2410	*C5	C2680	K4	C3112	*J6	CL405	D4	E7	E7	IC103	G7
C205	*M2	C337	J2	C467	*D4	C758	*N4	C857	*N4	C1158	*J6	C1310	L4	C1708	*G2	C1807	*H3	C2024	*E2	C2133	*C3	C2232	*D5	C2411	*C5	C2681	A2	C3113	*J6	CL406	D4	E8	N6	IC104	D6
C206	*N2	C338	H2	C468	*D4	C759	*N4	C858	*M4	C1159	*J6	C1311	L4	C1709	*J2	C1808	*H3	C2025	*E3	C2134	*C3	C2233	*E5	C2412	*D6	C2682	G4	C3114	*J6	CL407	D4	E9	*A1	IC105	G7
C207	*M2	C339	G2	C469	*D4	C760	*N4	C859	*M4	C1160	*K6	C1312	L4	C1710	*J2	C1809	*H3	C2026	*D3	C2135	*C3	C2234	*E5	C2415	*B5	C2683	P2	C3115	*L5	CL408	D4	E10	*F1	IC106	D5
C208	*N2	C340	D2	C470	*D4	C761	*M4	C860	*M4	C1161	*K6	C1313	L4	C1711	*J2	C1810	*H3	C2027	*D3	C2136	*C3	C2235	*E5	C2416	*B6	C2684	N5	C3116	*K5	CL409	D4	E11	*P1	IC107	*N7
C209	*M2	C341	D2	C471	*D4	C762	*M4	C861	*M4	C1162	*J6	C1314	L4	C1712	*G2	C1811	*H3	C2028	*E3	C2137	*C3	C2236	*E5	C2417	*B6	C2685	H5	C3117	*J6	CL410	D4	E12	*G2	IC108	N7
C210	*N2	C342	J2	C472	*C4	C763	*M4	C862	*M4	C1163	*K5	C1315	L4	C1713	*H2	C1812	*H3	C2029	*E3	C2138	*C3	C2237	*F5	C2418	*E7	C2686	B2	C3118	*K5	CL411	D4	E13	*L2	IC109	*M6
C211	*M2	C343	H2	C473	*D4	C764	*N4	C863	*M4	C1164	*K5	C1316	L4	C1714	*H2	C1813	*H3	C2030	*E3	C2139	*C3	C2238	*D5	C2419	*C1	C2687	M5	C3119	*K5	CL412	K3	E14	*A7	IC110	*N6
C212	*N2	C344	G2	C474	*D4	C765	*N3	C864	P3	C1165	*K5	C1317	L4	C1715	*J2	C1814	*H3	C2031	*E2	C2140	*C4	C2239	*E5	C2420	*D7	C2688	G5	C3120	*K5	CL413	K3	E15	*E7	IC111	*N6
C213	*N2	C345	D2	C475	*D4	C766	*M4	C865	P3	C1166	*K5	C1318	L3	C1716	*H3	C1815	*H3	C2032	*E2	C2141	*C3	C2240	*D5	C2421	*C2	C2689	L5	C3121	*J5	CL414	K3	E16	*P7	IC112	*M7
C214	*M2	C346	C2	C476	*D4	C767	*N4	C866	P3	C1167	*K5	C1319	L3	C1717	*J3	C1816	*H3	C2033	*E3	C2142	*C3	C2241	*E5	C2422	*D6	C2690	G5	C3122	J5	CL415	K3	E17	G7	IC113	N7
C215	*M2	C347	*M2	C477	*D4	C768	*M4	C867	P3	C1168	*K5	C1320	L3	C1718	*H2	C1817	*H3	C2034	*E3	C2143	*C3	C2242	*D5	C2423	*D6	C2691	*L5	C3400	K2	CL416	K2	E18	P7	IC114	M7
C216	*N2	C348	*N2	C478	*D4	C769	*N4	C900	*K6	C1169	*K5	C1321	L3	C1719	*H2	C1818	*H3	C2035	*E3	C2144	*C3	C2243	*E5	C2424	*D6	C2692	*G5	C3401	K2	CL421	P1			IC115	*M7
C217	*N2	C349	*M2	C479	*D4	C770	*N3	C901	J6	C1170	*K5	C1322	L3	C1720	*H2	C1819	*H3	C2036	*E3	C2145	*C3	C2244	*E6	C2425	*D6	C2693	M5	C3402	K2	CL422	P1	F2601	B7	IC116	*N7
C218	*M2	C350	*N2	C480	C4	C771	*N4	C902	K7	C1171	*J6	C1323	L3	C1721	*K2	C1820	*H3	C2037	*E3	C2146	*C3	C2245	*E6	C2426	*D6	C2694	M5	C3403	K2	CL423	P1	F2602	A6	IC117	*M6
C219	*M2	C351	*M2	C481	C4	C772	*N4	C904	K7	C1172	*K5	C1324	L3	C1722	*K2	C1821	*H3	C2041	*E3	C2147	*C3	C2246	*E5	C2427	*D6	C2695	J4	C3404	K2	CL600	M3	F2603	B7	IC200	*N2
C222	*H2	C352	*M2	C482	C4	C773	*N4	C905	J7	C1173	*J5	C1325	L3	C1723	*K2	C1822	*H3	C2042	*E2	C2148	*C3	C2247	*D5	C2428	*D6	C2696	J5	C3405	*K2	CL1100	J5	F2604	B7	IC201	*M2
C223	*H2	C353	*L2	C483	C4	C774	*N4	C906	K6	C1174	*J6	C1326	H6	C1724	*G2	C1823	*H3	C2043	*E2	C2149	*C3	C2248	*F5	C2429	*D6	C2699	F5	C3406	K2	CL1200	*K7			IC202	*H1
C224	*K2	C354	*L2	C484	*D5	C775	*N4	C908	K6	C1175	*K6	C1327	H6	C1725	*J2	C1824	*H3	C2044	*E2	C2150	*C3	C2249	*E5	C2430	*D6	C2700	*B3	C3407	L2	CL1201	*L7	FB100	D6	IC204	*K1
C225	*K2	C355	*K1	C485	*D5	C776	*N4	C909	J6	C1176	*J6	C1328	H6	C1726	*H2	C1825	*H3	C2045	*E2	C2151	*C3	C2250	*D5	C2431	*D7	C2701	B3	C3408	K2	CL1202	*L7	FB101	*M6	IC206	*L2
C228	*H2	C356	*K1	C486	*D5	C777	*N4	C910	K7	C1177	*K6	C1329	H6	C1727	*J2	C1826	*H3	C2046	*E2	C2152	*C3	C2251	*D6	C2432	*D7	C2702	*B3	C3409	*K2	CL1203	*L7	FB200	*M2	IC207	*M2
C229	*H2	C357	*J1	C487	*D5	C778	*N4	C911	K6	C1178	*K6	C1330	H6	C1728	*H3	C1827	*H3	C2047	*E2	C2153	*C3	C2254	*D6	C2433	*D7	C2703	*B2	C3410	*K2	CL1204	*L7	FB201	*L2	IC208	*J1
C232	*K2	C358	*J1	C488	*D5	C779	*N4	C912	*J7	C1179	*K6	C1331	H6	C1729	*J3	C1828	*H3	C2048	*E2	C2154	*C4	C2255	*E6	C2434	*D6	C2704	*B4	C3411	K2	CL1600	*H3	FB202	*L2	IC209	*G1
C233	*K2	C359	*H1	C489	*D5	C780	*N4	C913	J7	C1180	*K6	C1332	H7	C1730	*H2	C1829	*H3	C2049	*E2	C2155	*C3	C2256	*E5	C2435	*D6	C2705	*C2	C3412	K2	CL2100	C4	FB203	*L2	IC210	*D1
C236	*H2	C360	*H1	C490	*D5	C781	*N3	C914	K6	C1181	*J5	C1333	H7	C1731	*H2	C1830	*H3	C2050	*E2	C2156	*C3	C2257	*E6	C2436	*E6	C2706	*D2	C3413	*K2	CL2101	C4	FB204	*K1	IC211	*D1
C238	*K2	C361	*G1	C491	D5	C782	*N3	C915	*K7	C1182	*J5	C1334	H5	C1732	*H2	C1831	*H3	C2051	*E2	C2157	*C3	C2258	*D6	C2437	*D6	C2707	*A2	C3414	*K2	CL2102	C4	FB205	*K1	IC213	*N2
C240	*H1	C362	*G1	C492	D5	C783	*M3	C916	J7	C1183	*J5	C1335	H5	C1733	*G2	C1832	*H3	C2052	*E2	C2158	*C3	C2259	*F6	C2438	*D6	C2708	*B2	C3415	*K2	CL2103	*C3	FB206	*J1	IC214	*M2
C242	*K1	C363	*K1	C493	D5	C784	*M3	C917	J6	C1184	*K5	C1336	H5	C1734	*J2	C1833	*H3	C2053	*E3	C2159	*C3	C2260	*E6	C2439	*D6	C2709	*B4	C3416	K2	CL2104	C2	FB207	*J1	IC215	L2
C244	*H1	C364	*J1	C494	*D5	C785	*M3	C918	*J6	C1185	*J5	C1337	H5	C1735	*H2	C1834	*H3	C2054	*E3	C2160	*B3	C2261	*D5	C2440	*D6	C2710	*B4	C3417	*K2	CL2105	*C2	FB208	*H1	IC216	L2
C246	*K1	C365	*H1	C495	*D5	C786	*N4	C919	*J7	C1186	*J6	C1338	H5	C1736	*J2	C1835	*H3	C2055	*E3	C2161	*B3	C2262	*F7	C2441	*E7	C2800	*M6	C3418	K2	CL2106	*C2	FB209	*H1	IC217	J2
C248	*H1	C366	*G1	C496	*K3	C787	*N3	C920	J7	C1187	*K5	C1339	H5	C1737	*H3	C1836	*H3	C2056	*E3	C2162	*B3	C2263	F7	C2443	*C2	C2801	*M6	C3419	*K2	CL2107	*C2	FB210	*G1	IC218	J2
C249	*H1	C367	*M2	C501	*P3	C788	*M3	C921	*J6	C1188	*J6	C1340	H6	C1738	*J3	C1837	*H3	C2057	*E3	C2163	*B3	C2264	F7	C2444	C2	C2802	*M6	C3420	*K2	CL2108	*C2	FB211	*G1	IC219	H2
C252	*K1	C368	*L2	C605	*N4	C789	*M3	C922	J6	C1189	*J6	C1341	H6	C1739	*G2	C1838	*H3	C2058	*E3	C2164	*B3	C2265	*E5	C2445	C1	C2803	*F6	C3421	*K2	CL2109	*C2	FB212	*E1	IC220	G2
C253	*K1	C369	*D1	C606	*P4	C790	*N3	C923	*J7	C1190	*J6	C1342	*H5	C1740	*G2	C1839	*H3	C2059	*E3	C2165	*B3	C2266	*F5	C2446	*P3	C2804	*F6	C3422	*K2	CL2110	C2	FB213	*D1	IC221	D2
C256	*M2	C370	*E1	C607	M4	C791	*N3	C924	K5	C1191	*K6	C1343	*H5	C1741	*G2	C1840	*H3	C2060	*E3	C2166	*B3	C2267	C1	C2447	*L5	C2805	*F6	C3423	*K2	CL2111	C2	FB214	*D1	IC222	C2
C257	*M2	C400	*K3	C608	M4	C792	*N3	C925	K5	C1192	*J5	C1344	*H6	C1742	*K2	C1841	*H3	C2061	*E3	C2167	*B3	C2268	C1	C2448	*J3	C2806	M6	C3424	*K2	CL2112	*C2	FB215	*D1	IC400	K3
C258	*L2	C401	K3	C609	N3	C793	*N3	C926	*K5	C1193	*J5	C1345	*H6	C1743	*K2	C1842	*H3	C2062	*E3	C2168	*B3	C2269	D4	C2450	*P3	C2807	F6	C3425	K2	CL2113	*C2	FB400	K3	IC401	K3
C259	*L2	C402	*K3	C610	N3	C794	*N3	C927	K5	C1194	*J5	C1346	*H6	C1744	*K2	C1843	*H3	C2063	*E3	C2169	*B3	C2270	E4	C2451	*L5	C2808	*M5	C3426	K2	CL2114	C3	FB401	K4	IC402	K2
C260	*J2	C403	*K3	C611	*N3	C795	*M3	C928	*K5	C1195	*J5	C1347	*H6	C1745	*J2	C1844	*H3	C2064	*E3	C2170	*C3	C2271	D4	C2452	*J3	C2809	*F6	C3427	K2	CL2115	C3	FB402	*K2	IC404	K3
C261	*J2	C404	*K3	C612	*N3	C796	*N4	C929	K5	C1196	*K5	C1348	*H6	C1746	*H2	C1845	*H3	C2071	*E2	C2171	*B3	C2272	E4	C2454	*C6	C2810	E6	C3428	*K2	CL2116	*C3	FB403	*P3	IC405	D4
C262	*G2	C405	*K3	C613	*M3	C797	*N3	C930	*K5	C1197	*K5	C1349	*H6	C1747	*H2	C1846	*H3	C2072	*E2	C2172	*C3	C2273	B1	C2500	*F2	C2811	E6	C3429	*K2	CL2117	*C3	FB404	*P3	IC406	D5
C263	*G2	C406	*K3	C614	*M3	C798	*N3	C931	K5	C1198	*K5	C1350	*H5	C1748	H2	C1847	*H3	C2073	*E2	C2173	*B3	C2274	B2	C2501	*F1	C2812	M5	C3430	K2	CL2118	*C3	FB405	*K3	IC407	D5
C264	*L2	C407	K3	C700	N2	C799	*N4	C1100	L6	C1200	L7	C1351	*H5	C1749	G2	C1848	*J3	C2074	*E2	C2174	*B3	C2275	B1	C2502	*F7	C2813	E6	C3431	*K2	CL2119	*C3	FB406	*D4	IC408	*D5
C265	*L2	C408	*K3	C701	M2	C800	*M3	C1101	K7	C1201	L7	C1352	L4	C1750	*K2	C1849	*J3	C2075	*E2	C2175	*B3	C2276	B2	C2503	*F7	C2814	*M5	C3432	K2	CL2120	*C3	FB407	*C5	IC410	*D5
C266	*M2	C409	*K3	C702	P2	C801	*M4	C1102	*J6	C1202	K7	C1353	L3	C1751	*J2	C1850	*H3	C2076	*E2	C2176	*B3	C2277	A2	C2504	F1	C2815	*F6	C3433	*K2	CL2121	*C3	FB408	*D5	IC411	K2
C267	*M2	C410	K4	C703	*N4	C802	*N3	C1103	K6	C1203	K7	C1354	*L4	C1752	*J2	C1851	*J3	C2077	*E2	C2177	*B2	C2278	A2	C2505	F2	C2816	*M5	C3434	*K2	CL2301	*P6	FB409	*D5	IC412	K2
C268	*J2	C411	*K3	C704	*N3	C803	*M4

 HIF-56

IC1301 L4
IC1302 L3
IC1303 H6
IC1304 H5
IC1305 *H5
IC1500 *G3
IC1501 *G2
IC1502 G3
IC1503 G2
IC1504 *F3
IC1505 *F3
IC1506 *F3
IC1507 *F3
IC2000 H3
IC2100 C3
IC2101 B3
IC2103 *C2
IC2105 *B3
IC2200 *E4
IC2201 *E4
IC2202 *E5
IC2203 *E5
IC2204 *D5
IC2205 *D5
IC2206 *E5
IC2207 *E5
IC2208 *E5
IC2209 *D5
IC2210 *D6
IC2211 *E6
IC2212 *F7
IC2213 F7
IC2214 *E6
IC2215 *D5
IC2216 F7
IC2217 C1
IC2218 B2
IC2219 B2
IC2221 B1
IC2301 P6
IC2302 G6
IC2303 *P7
IC2304 *G7
IC2400 D6
IC2401 *C6
IC2402 *B7
IC2403 *C7
IC2404 *C7
IC2405 *D6
IC2406 *B7
IC2407 *B6
IC2408 *C5
IC2409 *B5
IC2410 *B6
IC2411 *B6
IC2412 *E6
IC2413 *C1
IC2414 *D7
IC2415 *C2
IC2417 *C2
IC2418 C2
IC2419 *P3
IC2420 *L5
IC2421 *J3
IC2423 C1
IC2500 *F2
IC2501 *F1
IC2502 F2
IC2503 *F7
IC2505 *E7
IC2506 *C6
IC2507 *F2
IC2508 *F1
IC2509 *E7
IC2510 *B5
IC2511 *C7
IC2512 *C5
IC2513 *C5
IC2514 *C5
IC2515 *C5
IC2516 *B5
IC2600 A5
IC2601 *A7
IC2602 *M5
IC2603 *F6
IC2604 F4
IC2605 *P2
IC2606 P5
IC2607 J4
IC2608 B2
IC2609 *L5
IC2610 *G5
IC2611 *K4
IC2612 B4
IC2613 F5
IC2614 A4
IC2615 *D3
IC2616 C6
IC3000 N4

IC3001 K6

L200 *N2
L201 *M2
L208 *H1
L209 *K1
L210 *K1
L211 *H1
L216 *L2
L217 *L2
L218 *J1
L219 *G1
L223 *D1
L224 *D1
L226 *D1
L227 *G1
L228 *M2
L229 *L2
L237 *J1
L240 *D1
L2100 C2
L2101 C2
L2200 E4
L2201 E4
L2202 *E5
L2203 *E5
L2204 *D5
L2205 *E5
L2206 A2
L2500 *F7
L2601 C6
L2602 C7
L2604 B5
L2609 A6
L2610 B5
L2620 G4
L2621 F4
L2622 N5
L2623 N5
L2624 H4
L2625 H4
L2627 M5
L2628 F6
L2629 C5

Q400 *K2
Q401 *P3
Q402 *P3
Q403 *K3
Q404 *D5
Q405 *D5
Q2200 *E5
Q2201 *F5

R1 P7
R2 P7
R3 *P7
R4 *P7
R5 P7
R6 P7
R7 *P7
R8 *P7
R9 P7
R10 P7
R11 *P7
R12 *P7
R13 P7
R14 P7
R15 *P7
R16 *P7
R17 N7
R18 N7
R19 *N7
R20 *N7
R21 N7
R22 N7
R23 *N7
R24 *N7
R25 N7
R26 N7
R100 E7
R101 F7
R102 *C6
R103 E7
R104 F7
R105 *C6
R106 *C6
R107 *B6
R108 *B6
R109 *B6
R110 *C6
R111 *C6
R112 *C6
R113 *B6
R114 *B6
R115 *B6
R116 D6
R117 D6
R118 *C6
R119 *C6
R120 *C6
R121 *B6
R122 *B6
R123 *B6
R124 D6
R125 D6
R126 D5
R127 D6
R128 D5
R129 E5
R130 E5
R131 E6
R132 D5
R133 D5
R134 E6
R135 D5
R136 *N7
R137 *N7
R138 *N7
R139 *N7
R140 *N7
R141 *N7
R142 *N7
R143 *N7
R144 *M6
R145 *M6
R146 *M6
R147 *M6
R148 *M6
R149 N7
R150 N7
R151 N7
R152 *M6
R153 *M6
R154 *M6
R155 *M6
R156 *M6
R157 *M6
R158 *M6
R159 *M6
R162 *M7
R163 N7
R164 M7
R165 *N7
R166 N7
R167 M7
R168 *M7
R169 M7
R170 M7
R171 *M7
R172 M7
R173 M7
R174 *M7
R175 M7
R176 M7
R177 *M7
R178 M7
R179 M7
R180 *M7
R181 N7
R182 *M7
R183 N7
R184 *M7
R185 *M7
R186 *M7
R187 *M7
R188 N7
R189 N7
R190 N7
R191 N7
R192 M7
R193 M7
R194 M7
R195 D5
R200 *N2
R201 *N2
R202 *N2
R203 *M2
R204 *M2
R205 *N2
R206 *M2
R207 *M2
R208 *N2
R209 *M2
R210 *N2
R212 *M2
R213 *N2
R214 *N2
R217 *M2
R218 *M2
R222 *N2
R223 *N2
R224 *M2
R225 *M2
R226 *N2
R227 *N2
R228 *M2
R229 *M2
R232 *H2
R233 *H2
R234 *K2
R235 *K2
R240 *H2
R244 *K2
R245 *H2
R249 *K2
R254 *H1
R256 *K1
R258 *H1
R260 *K1
R261 *H1
R264 *K1
R266 *H1
R267 *H1
R270 *K1
R271 *K1
R282 *M2
R283 *L2
R284 *L2
R285 *L2
R286 *J2
R287 *J2
R288 *G2
R289 *G2
R292 *L2
R295 *L2
R296 *J2
R297 *L2
R298 *G2
R299 *M2
R301 *J2
R305 *G2
R306 *L2
R307 *L2
R308 *J1
R309 *G1
R310 *L2
R311 *M2
R312 *J1
R313 *L2
R314 *G1
R315 *L2
R316 *J1
R317 *G1
R318 *L2
R320 *M2
R322 *J1
R324 *G1
R325 *G1
R330 *L2
R331 *M2
R332 *J1
R333 *G1
R334 *D2
R335 *D2
R338 *D2
R339 *D2
R347 *D2
R349 *D2
R350 *D2
R354 *D2
R358 *D1
R359 *D1
R361 *E1
R362 *D1
R363 *D1
R365 *D1
R367 *D1
R368 *D1
R369 *D1
R370 *D1
R373 *D1
R374 *D1
R376 *D1
R377 *D1
R379 *N2
R380 *N2
R381 *M2
R382 *N2
R383 *M2
R384 *M2
R385 *M2
R386 *M2
R401 *K3
R402 *K3
R403 K3
R404 K3
R405 K3
R406 K3
R407 K3
R408 K3
R409 K3
R410 K3
R411 K3
R412 *P3
R413 P3
R414 P3
R415 P3
R416 P3
R417 P3
R418 P3
R420 K2
R423 K2
R424 K2
R429 *D4
R430 *D5
R431 *D5
R432 D5
R433 D5
R434 D5
R435 D5
R436 C4
R437 C4
R438 C4
R439 C4
R440 C4
R441 D5
R442 D5
R443 D5
R450 K2
R451 *K3
R452 *K3
R453 K3
R454 K3
R455 K3
R456 K2
R457 K2
R458 K2
R460 K2
R461 K2
R462 K2
R463 *K2
R464 *P1
R465 *P2
R466 *P3
R467 *P3
R476 *K2
R477 *K2
R478 K2
R479 K2
R480 K2
R481 K2
R482 K2
R483 K2
R484 *K3
R485 *K3
R486 K3
R487 K3
R488 D4
R489 D4
R490 D5
R491 D5
R492 K2
R493 K2
R494 P3
R501 *P1
R502 *P1
R503 *N1
R504 *N1
R505 *P2
R506 *P2
R507 *P2
R508 *N2
R509 *P3
R512 *N4
R513 *N4
R514 M3
R515 M3
R516 M4
R517 M4
R518 *M4
R519 *L3
R520 *P4
R521 *P4
R530 *M4
R531 P4
R532 P4
R600 N3
R601 N3
R602 N3
R603 *N3
R604 N3
R605 N3
R606 *N3
R607 N3
R608 N3
R609 N3
R610 P3
R611 N3
R612 N3
R613 N3
R614 N3
R617 N3
R618 N3
R619 *N3
R620 M3
R621 N3
R622 N3
R623 N3
R624 N3
R625 M3
R626 M3
R627 M3
R628 M3
R629 N3
R630 N3
R631 M3
R632 N3
R633 *M3
R634 *M3
R635 N3
R636 P3
R637 P3
R638 N3
R639 N3
R640 N3
R641 N3
R642 N3
R643 N3
R644 N3
R645 N3
R646 N3
R647 N3
R648 N3
R649 N3
R650 N3
R651 N3
R652 M3
R653 M3
R654 M4
R655 M4
R656 M4
R657 M4
R658 M4
R659 P3
R660 P3
R661 P3
R662 P3
R663 P3
R664 P3
R665 P4
R666 P4
R667 N4
R668 N4
R669 M4
R670 P4
R671 P4
R672 *N3
R673 *N3
R674 N4
R676 N4
R677 P4
R678 P4
R679 M3
R680 M3
R681 M3
R682 M3
R683 *N4
R684 *N4
R685 M3
R686 M3
R687 P4
R688 P4
R689 *P4
R690 *P3
R691 P4
R692 P4
R693 N4
R694 N4
R695 *P4
R696 *P4
R697 N4
R698 N4
R699 N4
R700 N4
R701 *M3
R702 *M3
R703 *M4
R704 *M4
R705 *M4
R706 *M4
R707 M4
R714 N3
R715 N4
R716 M3
R717 M3
R728 P4
R729 *N4
R730 P3
R731 P3
R732 P3
R733 P3
R734 P4
R735 *P3
R736 P4
R737 *N4
R738 N3
R739 N3
R740 N3
R741 N3
R742 *N3
R743 *N3
R744 *N3
R745 *M3
R746 *M3
R747 *M3
R748 M4
R749 M4
R750 M4
R751 M4
R752 *N3
R753 *N3
R754 *N3
R755 *N3
R756 *N3
R757 *N3
R758 *N3
R759 *N3
R760 *N3
R761 *N3
R764 M3
R765 M3
R766 *P4
R767 *P3
R768 *P3
R769 M3
R770 M3
R771 M3
R776 *N3
R777 *N3
R780 M3
R781 M3
R782 M4
R783 M4
R900 *K6
R901 J6
R902 K7
R904 *K6
R905 J6
R906 K7
R908 K7
R909 J7
R910 K6
R912 K7
R913 J7
R914 K6
R916 K6
R917 J6
R918 K7
R919 K6
R920 K6
R921 J6
R922 K7
R923 K6
R924 *K7
R925 J7
R926 K6
R927 *K7
R928 *J7
R929 J7
R930 K6
R931 *K7
R932 K7
R933 J6
R934 J7
R935 J6
R936 *J6
R937 *J6
R938 *J7
R939 *J7
R940 J7
R941 J7
R942 *J6
R943 *J6
R944 J6
R945 J6
R946 *J7
R947 *J7
R948 *L6
R949 *K6
R950 *K6
R951 *K6
R952 K5
R953 K5
R954 K5
R955 K5
R956 *K5
R957 *K5
R958 K5
R959 K5
R960 *K5
R961 *K5
R962 K5
R963 K5
R964 *K5
R965 *K5
R966 K5
R967 K5
R968 M6
R969 M6
R970 M6
R971 M6
R1027 H7
R1032 *J5
R1033 J5
R1034 J5
R1035 *J5
R1036 *J6
R1037 *J5
R1038 J5
R1039 J5
R1040 J5
R1041 J6
R1042 *J5
R1043 *J5
R1044 *J5
R1045 *J5
R1046 *J5
R1047 *J5
R1056 J6
R1057 *J6
R1058 *K6
R1100 L6
R1101 K7
R1102 K6
R1103 K7
R1104 *J6
R1105 K6
R1106 *J6
R1107 K6
R1108 *K5
R1109 J5
R1110 *K5
R1111 J5
R1113 J5
R1114 L6
R1115 L6
R1116 L6
R1117 *K6
R1118 J5
R1119 *K6
R1120 *K6
R1121 *K6
R1122 *K6
R1123 J6
R1124 J6
R1125 *J6
R1126 *J5
R1127 *J5
R1128 K5
R1129 K5
R1130 K5
R1131 K5
R1132 K5
R1133 K5
R1134 K5
R1135 K5
R1136 L6
R1137 *L6
R1138 L6
R1139 J5
R1140 *L6
R1141 J5
R1142 *J6
R1143 *J6
R1144 J6
R1145 J6
R1146 *L5
R1147 *L6
R1148 *L6
R1149 *L5
R1150 *L5
R1154 L6
R1155 *L6
R1156 *L6
R1157 *L6
R1158 L6
R1159 L6
R1160 J6
R1161 *J6
R1162 L5
R1163 J6
R1164 J6
R1165 *J6
R1166 L6
R1167 *J6
R1168 L6
R1169 L6
R1170 L6
R1171 J5
R1172 *J5
R1173 J6
R1174 *J6
R1175 J5
R1176 *J5
R1177 *J6
R1178 *J6
R1179 *J6
R1180 *J6
R1181 J6
R1182 L6
R1183 J6
R1184 L5
R1185 L6
R1186 *K6
R1187 *L6
R1188 L6
R1189 *K7
R1190 *L6
R1191 *J5
R1192 *J6
R1193 *J5
R1194 *J5
R1195 *J6
R1196 *J6
R1200 L7
R1201 L7
R1202 L7
R1203 L7
R1204 K7
R1205 K7
R1206 K7
R1207 K7
R1208 K7
R1209 K7
R1210 *K7
R1211 *K7
R1212 *K7
R1213 *L7
R1215 *L7
R1216 *L7
R1217 *L7
R1218 *L7
R1219 *M7
R1220 *L7
R1300 *M3
R1301 *M3
R1302 *L3
R1303 *L4
R1304 *L4
R1307 *L4
R1308 L4
R1309 L4
R1310 L4
R1311 L3
R1312 L3
R1313 L3
R1314 J6
R1315 J6
R1316 H7
R1317 H7
R1318 H7
R1321 H6
R1322 H6
R1323 H6
R1324 H5
R1325 *H5
R1326 *H5
R1327 *H6
R1328 *M4
R1329 *M4
R1330 *M4
R1331 *M4
R1332 L4
R1333 L4
R1334 *J5
R1335 *J5
R1336 *J6
R1337 *J6
R1338 H6
R1339 *H5
R1400 H4
R1401 H4
R1402 H4
R1403 H4
R1404 H4
R1405 H4
R1406 H4
R1407 H4
R1408 H4
R1409 H4
R1410 H4
R1411 H4
R1448 *F1
R1449 *F1
R1450 *F1
R1451 *F1
R1452 *L1
R1453 *K1
R1454 *K1
R1455 *K1
R1456 J3
R1501 *G3
R1503 *G2
R1504 *G3
R1505 *G2
R1506 *F3
R1507 *F2
R1508 G3
R1509 G2
R1510 F3
R1511 F2
R1512 F3
R1513 F3
R1514 F3
R1515 F3
R1516 F3
R1517 G3
R1518 G3
R1519 F3
R1520 F3
R1521 F3
R1522 F2
R1523 F2
R1524 G2
R1525 G2
R1526 G3
R1527 G2
R1528 *F3
R1529 *F3
R1530 *F3
R1531 *F3
R1532 *G3
R1533 *G2
R1600 J2
R1601 *J2
R1602 *H3
R1603 J2
R1604 *J3
R1605 *H3
R1606 J2
R1607 J2
R1608 J2
R1609 J2
R1610 J2
R1611 J2
R1612 J2
R1613 J2
R1614 H2
R1615 H2
R1616 H2
R1617 J2
R1618 H2
R1619 H2
R1620 H2
R1621 H2
R1622 H2
R1623 H2
R1624 H2
R1625 H2
R1626 H2
R1627 H2
R1628 H2
R1629 H2
R1630 H2
R1631 H2
R1632 H2
R1633 H2
R1634 J2
R1635 *H3
R1636 H2
R1637 H2
R1638 H2
R1639 H2
R1640 H2
R1641 H2
R1642 J3
R1643 J3
R1644 *J2
R1645 *J2
R1646 J2
R1647 J2
R1648 H2
R1649 H2
R1650 J2
R1651 H2
R1652 H2
R1653 H2
R1654 H2
R1655 H2
R1656 H4
R1657 J4
R1658 J3
R1659 J3
R1660 J3
R1661 H3
R1662 H3
R1663 H3
R1664 J3
R1665 J3
R1666 H3
R1667 H3
R1668 J4
R1669 H4
R1670 H4
R1671 H4
R1672 J3
R1673 J3
R1674 *H3
R1675 J4
R1676 J4
R1677 *H3
R1678 *H3
R1679 *H3
R1680 *J3
R1681 *J3
R1682 J3
R1683 J4
R1684 J4
R1685 H4
R1686 H4
R1687 *J3
R1688 G3
R1689 *J3
R1690 G3
R1691 *J3
R1692 *J3
R1693 G3
R1694 G3
R1695 H3
R1696 H3
R1697 *H3
R1698 *H3
R1699 *H3
R1700 *H3
R1701 *H3
R1702 *H3
R1703 *H3
R1704 *H3
R1705 *H3
R1706 *H3
R1707 J3
R1708 J3
R1709 J3
R1710 J3
R1715 *H3
R1716 J4
R1717 *H4
R1718 *H4
R1719 *H4
R1720 *H4
R1721 J4
R1722 J3
R1723 J3
R1724 J3
R1725 J3
R1726 H2
R1727 H2
R1728 H2
R1729 H2
R1730 J3
R1731 J3
R1732 J2
R1733 *J3
R1734 *H3
R1735 *H3
R1736 *H3
R1737 J3
R1738 J2
R1739 J2
R1740 *J2
R1741 *J3
R1748 *J3
R1749 *J3
R1750 *J3
R1753 *J3
R1754 *J3
R1757 H2
R1758 H2
R1900 F4
R1901 F3
R1902 F3
R1903 F3
R1904 F3
R1905 F3
R1906 F3
R1907 F3
R1908 F3
R1909 F3
R1910 F3
R1911 F3
R1912 *E2
R1913 *E2
R1914 *E2
R1915 *E2
R1916 *E1
R1917 *E1
R1918 *E1
R1919 *E1
R1920 E2
R1921 E2
R1922 E3
R1923 D3
R1924 D2
R1925 D2
R1926 D3
R1927 D3
R1928 D2
R1929 D3
R1930 D2
R1931 D3
R1932 D3
R1933 D2
R1934 D2
R1935 D2
R1936 D2
R1937 D2
R1938 D2
R1939 D2
R1940 D2
R1941 D2
R1942 D2
R1943 D2
R1944 D2
R1945 D2
R1946 D2
R1947 D2
R1948 D2
R1949 D2
R1950 D2
R1951 D2
R1952 D2
R1953 D2
R1954 D2
R1955 D2
R1956 D2
R1957 D2
R1958 D2
R1959 D2
R1960 D2
R1961 D2
R1962 D3
R1963 F3
R1964 F3
R1965 F3
R1966 F3
R1967 F3
R1968 F3
R1969 F3
R1970 F3
R2000 *E2
R2001 *E2
R2002 *E2
R2003 *E2
R2005 F3
R2006 *E2
R2007 F3
R2008 *E2
R2011 E3
R2012 E3
R2013 D3
R2014 D3
R2015 F3
R2016 F3
R2017 E2
R2018 E2
R2019 D3
R2023 E3
R2027 D3
R2033 E3
R2039 *D3
R2040 *D3
R2041 E2
R2042 E2
R2043 E2
R2044 *E3
R2045 E2
R2046 *E3
R2051 D3
R2052 *E3
R2053 D3
R2054 D3
R2055 D2
R2058 D3
R2059 D3
R2061 D3
R2062 D3
R2063 D3
R2064 D3
R2065 D3
R2070 F3
R2071 F3
R2072 E3
R2076 *E3
R2077 *E3
R2080 *E3
R2100 B3
R2101 B3
R2102 B3
R2103 *B3
R2104 *B4
R2105 B4
R2106 B3
R2107 B3
R2108 B3
R2109 B3
R2110 A3
R2111 *A3
R2112 A3
R2113 *A3
R2114 B3
R2115 *B3
R2116 B3
R2117 *B3
R2118 B3
R2119 *B3
R2120 B3
R2121 *B3
R2122 B3
R2123 *B3
R2124 B3
R2125 *B3
R2126 B3
R2127 *B3
R2128 B3
R2129 *B3
R2130 B3
R2131 *B3
R2132 B3
R2133 *B3
R2134 *C2
R2135 *C2
R2136 *C2
R2137 *C2
R2138 *C2
R2139 *C3
R2140 *C3
R2141 *C2
R2142 *C2
R2143 *C4
R2144 *C4
R2145 *C4
R2146 C4
R2147 *C4
R2148 C4
R2149 C4
R2150 *C3
R2151 C3
R2152 C3
R2153 C2
R2154 C2
R2155 C2
R2156 C2
R2157 C2
R2158 C3
R2159 C4
R2160 C4
R2161 *C4
R2162 *C4
R2163 C4
R2200 *E5
R2201 *E5
R2202 *E5
R2203 *E5
R2204 *E5
R2205 *E5
R2206 *D4
R2207 *E4
R2208 *D4
R2209 *D4
R2210 *D4
R2211 *E4
R2212 *E4
R2213 *E4
R2214 *D4
R2215 *D4
R2216 *E4
R2217 *E4
R2218 *B1
R2219 *B1
R2220 D4
R2221 E4
R2222 *E5
R2223 *F5
R2224 *E5
R2225 *F5
R2226 *E5
R2227 *E5
R2228 *E5
R2229 *E5
R2230 *E5
R2231 *E5
R2232 *E5
R2233 *E5
R2234 *E5
R2235 *E5
R2236 *E5
R2237 *E5
R2238 *E5
R2239 *E5
R2240 *F5
R2241 *F5
R2242 *E5
R2243 *F5
R2244 *E5
R2245 *E5
R2246 *E5
R2247 *F5
R2248 *E5
R2249 *E5
R2250 *E5
R2251 *F5
R2252 *D5
R2253 *E5
R2254 *E6
R2255 *E6
R2256 *D5
R2257 *E5
R2258 *D5
R2259 *D6
R2260 *D6
R2261 *E6
R2262 *D6
R2263 *E6
R2264 *D6
R2265 *E6
R2266 *D5
R2267 *D5
R2268 *D5
R2269 *D5
R2270 *E6
R2271 *F6
R2272 *E6
R2273 *D5
R2274 *F6
R2275 *D5
R2276 *E5
R2277 *C1
R2278 *C1
R2282 E4
R2283 *C1
R2284 *C1
R2285 C1
R2286 *E5
R2287 *F5
R2288 C1
R2289 C1
R2290 C1
R2291 *B1
R2292 *B1
R2293 C1
R2294 C1
R2295 *D4
R2296 *B1
R2297 *E4
R2298 *B1
R2301 N6
R2302 *N6
R2303 N6
R2304 G6
R2305 *G6
R2306 F6
R2307 N5
R2308 G6
R2309 P6
R2310 G6
R2311 P5
R2312 P5
R2313 P5
R2314 P5
R2315 P5
R2316 P5
R2317 P5
R2318 P5
R2319 G6
R2320 G6
R2321 G6
R2322 G6
R2323 G6
R2324 G6
R2325 G6
R2326 G6
R2327 *N7
R2328 *G7
R2329 *N7
R2330 *G7
R2331 *P7
R2332 *H7
R2334 *N6
R2335 *N6
R2336 *N6
R2337 *N6
R2339 *G6
R2340 *G6
R2341 *G6
R2342 *G6
R2343 N6
R2344 *N6
R2345 F6
R2346 *G6
R2347 *N6
R2348 *N6
R2349 *G6
R2350 *G6
R2351 *N6
R2352 *N6
R2353 *G6
R2354 *G6
R2355 G6
R2401 *C7
R2402 *C7
R2403 *C6
R2404 *B7
R2405 *C6
R2406 *C6
R2407 *C6
R2408 *C7
R2409 *C7
R2410 *E1
R2411 *C6
R2412 *C6
R2413 *C6
R2414 *C5
R2415 *C5
R2416 *C5
R2417 *C5
R2418 *C5
R2419 *C5
R2420 *C5
R2421 *C5
R2422 *C5
R2423 *C5
R2424 *C5
R2425 *C5
R2426 *C5
R2427 *D6
R2429 D6
R2430 D6
R2431 D6
R2432 D6
R2433 D6
R2434 *D6
R2435 D6
R2436 *D6
R2437 *D6
R2438 D6
R2439 *D6
R2440 D6
R2441 D6
R2442 D6
R2443 D6
R2444 D6
R2445 *B6
R2446 *E7
R2447 *D6
R2448 *D6
R2449 *D6
R2450 *D6
R2451 *D6
R2452 *D6
R2453 *D6
R2454 *D6
R2455 *D6
R2456 *D6
R2457 *D6
R2458 *D6
R2459 *D6
R2460 C1
R2461 *D6
R2462 *D6
R2463 *D6
R2464 *C2
R2465 *D6
R2466 *D7
R2467 *D7
R2468 *D7
R2469 *P3
R2470 *P3
R2471 *P3
R2472 *P3
R2473 *L5
R2474 *L4
R2475 *J3
R2476 *J3
R2479 *P3
R2480 *L4
R2481 *J3
R2483 *P3
R2484 *C6
R2485 *C1
R2486 D6
R2487 D6
R2500 *F7
R2501 *F7
R2502 *F2
R2503 *F7
R2504 *F7
R2505 *F2
R2506 *F2
R2507 G2
R2508 *C5
R2509 *C6
R2510 *F7
R2511 *F7
R2512 *C6
R2513 *C6
R2514 *C6
R2515 *C5
R2516 G1
R2517 *F7
R2518 *F7
R2519 *C6
R2520 *C6
R2521 *C6
R2522 *C6
R2523 *C6
R2524 *C6
R2525 F1
R2526 F1
R2527 G1
R2528 G2
R2529 G2
R2530 G2
R2534 *F7
R2535 *F7
R2536 *F7
R2537 *C6
R2538 *C6
R2539 *C6
R2540 *F2
R2541 *F2
R2542 *F2
R2543 *F1
R2544 *F1
R2545 *F1
R2546 *F1
R2547 *F1
R2548 G1
R2549 G1
R2550 G1
R2551 *C4
R2552 *C4
R2553 *C4
R2554 *C5
R2555 *C6
R2556 *C5
R2557 *C5
R2558 *C5
R2559 *C5
R2560 *C5
R2561 *C5
R2562 *C5
R2563 *C4
R2564 *C4
R2565 *B5
R2566 *B5
R2567 *B4
R2568 *B4
R2569 *B4
R2570 *B4
R2571 *B4
R2572 *B4
R2645 F5
R2650 P5
R2651 K5
R2652 P5
R2653 J4
R2654 J5
R2655 P5
R2656 P5
R2657 J5
R2659 F5
R2660 F5
R2661 *M6
R2662 *M6
R2663 *M5
R2664 *M5
R2665 *M5
R2666 *M5
R2667 *M5
R2668 *M5
R2669 *M5
R2670 *M5
R2671 *F6
R2672 *F6
R2673 *F6
R2674 *F6
R2675 *F6
R2676 *F6
R2677 *F6
R2678 *F6
R2679 *F6
R2680 *F6
R2681 *M5
R2683 *F6
R2684 C6
R2685 C6
R2686 C6
R2687 C6
R2688 C6
R2689 C6
R3000 B2
R3001 *B2
R3002 *B1
R3003 *B2
R3004 *B1
R3005 *B2
R3006 B1
R3007 *B1
R3008 B2
R3009 *B2
R3010 B1
R3011 *B1
R3012 *B2
R3013 *B1
R3014 *B2
R3015 *B1
R3016 B2
R3017 B1
R3018 B2
R3019 B1
R3020 B2
R3021 B2
R3022 B1
R3023 B1
R3024 B2
R3025 B2
R3026 B1
R3027 B1
R3028 B2
R3029 B1
R3030 B2
R3031 B1
R3032 B2
R3033 B2
R3034 B2
R3035 A2
R3036 B2
R3037 B2
R3038 B1
R3039 B1
R3040 B1
R3041 B1
R3042 *F7
R3043 F7
R3044 F7
R3045 B2
R3046 B1
R3047 B2
R3048 B1
R3049 D4
R3050 E4
R3300 *K1
R3301 *H1
R3302 *K1
R3303 *H1
R3304 *J1
R3306 *G1
R3307 *L2
R3308 *L2
R3313 L2
R3314 L2
R3315 K2
R3316 J2
R3317 H2
R3318 G2
R3319 D2
R3320 D2
R3321 *L2
R3322 *L2
R3323 *M2
R3324 *L2
R3325 *K1
R3326 *J1
R3327 *J1
R3328 *H1
R3329 *G1
R3330 *D1
R3331 *D1
R3332 *M2
R3333 *N2
R3334 N2
R3335 N2
R3336 N2
R3337 N2
R3338 M2
R3339 M2
R3340 M2
R3341 M2

RB100 *G7
RB101 *G7
RB102 G7
RB103 G7
RB104 *N7
RB105 *N7
RB106 *M7
RB107 *M7
RB501 *N1
RB502 M3
RB503 M3
RB504 M3
RB505 M3
RB506 M4
RB507 M4
RB508 M4
RB509 M4
RB510 *M4
RB511 *M4
RB512 L3
RB513 *L3
RB514 *L3
RB515 L3
RB516 L3
RB517 *M4
RB518 *M4
RB600 P3
RB601 P3
RB602 *N3
RB900 *M6
RB901 *J6
RB902 *J6
RB903 *J5
RB904 *J5
RB905 J5
RB906 J5
RB907 J5
RB908 J6
RB909 J6
RB910 J6
RB911 J6
RB912 J6
RB913 *H6
RB914 H7
RB915 H7
RB916 *H6
RB917 *H6
RB1100 *L6
RB1101 *L6
RB1102 *L7
RB1103 L5
RB1400 *L1
RB1600 J4
RB1601 J4
RB1900 *E1
RB2003 *F2
RB2100 B3
RB2101 B3
RB2102 B3
RB2103 B3
RB2104 *B3
RB2105 *B3
RB2106 *B3
RB2107 *B3
RB2108 B3
RB2109 *B3
RB2110 B3
RB2111 *B3
RB2112 C4
RB2113 C4
RB2114 *B4
RB2115 B4
RB2116 B4
RB2117 B3
RB2118 B3
RB2200 *F7
RB2201 *F7
RB2202 F7
RB2401 *B7
RB2402 *B7
RB2403 *B7
RB2404 *C7
RB2405 *B7
RB2406 *B7
RB2407 *C7
RB2408 *B7
RB2409 *C7
RB2410 *B7
RB2411 *B7
RB2412 *B7
RB2413 *B6
RB2414 *B5
RB2415 *B5
RB2416 *C7
RB2417 *B5
RB2418 *B6
RB2419 *C1
RB2420 *D7
RB2421 *C1
RB2422 *D7
RB2423 *B7
RB2424 *C7
RB2425 *B7
RB2426 *B6
RB2427 *B7
RB2428 *B6
RB2429 *B5
RB2500 *C7
RB2501 D7
RB2502 *C7
RB2503 *C7
RB2504 *E7
RB2505 *E7
RB2506 *E7
RB2507 *C7
RB2508 D7
RB2509 *E7

RV2200 B1
RV2201 B1
RV2202 C1
RV2203 C1

S501 N2
S900 N6
S1400 L1
S1900 E1
S2401 E1
S2402 D7

TP100 G7
TP101 N6
TP501 P1
TP502 P1
TP503 N1
TP504 N1
TP900 N6
TP901 N6
TP902 N6
TP903 N5
TP1400 F1
TP1401 F1
TP1402 F1
TP1403 F1
TP1900 E1
TP1901 E1
TP1902 E1
TP1903 E1
TP2100 D3
TP2101 D3
TP2200 E5
TP2201 E5
TP2300 N6
TP2301 N6
TP2302 F5
TP2303 F5
TP2401 D7
TP2402 D7
TP2403 D7
TP2404 D7

X400 K2
X401 P3
X402 P3
X403 K3
X404 D5
X405 D5

*:B SIDE

 4-51 (a)

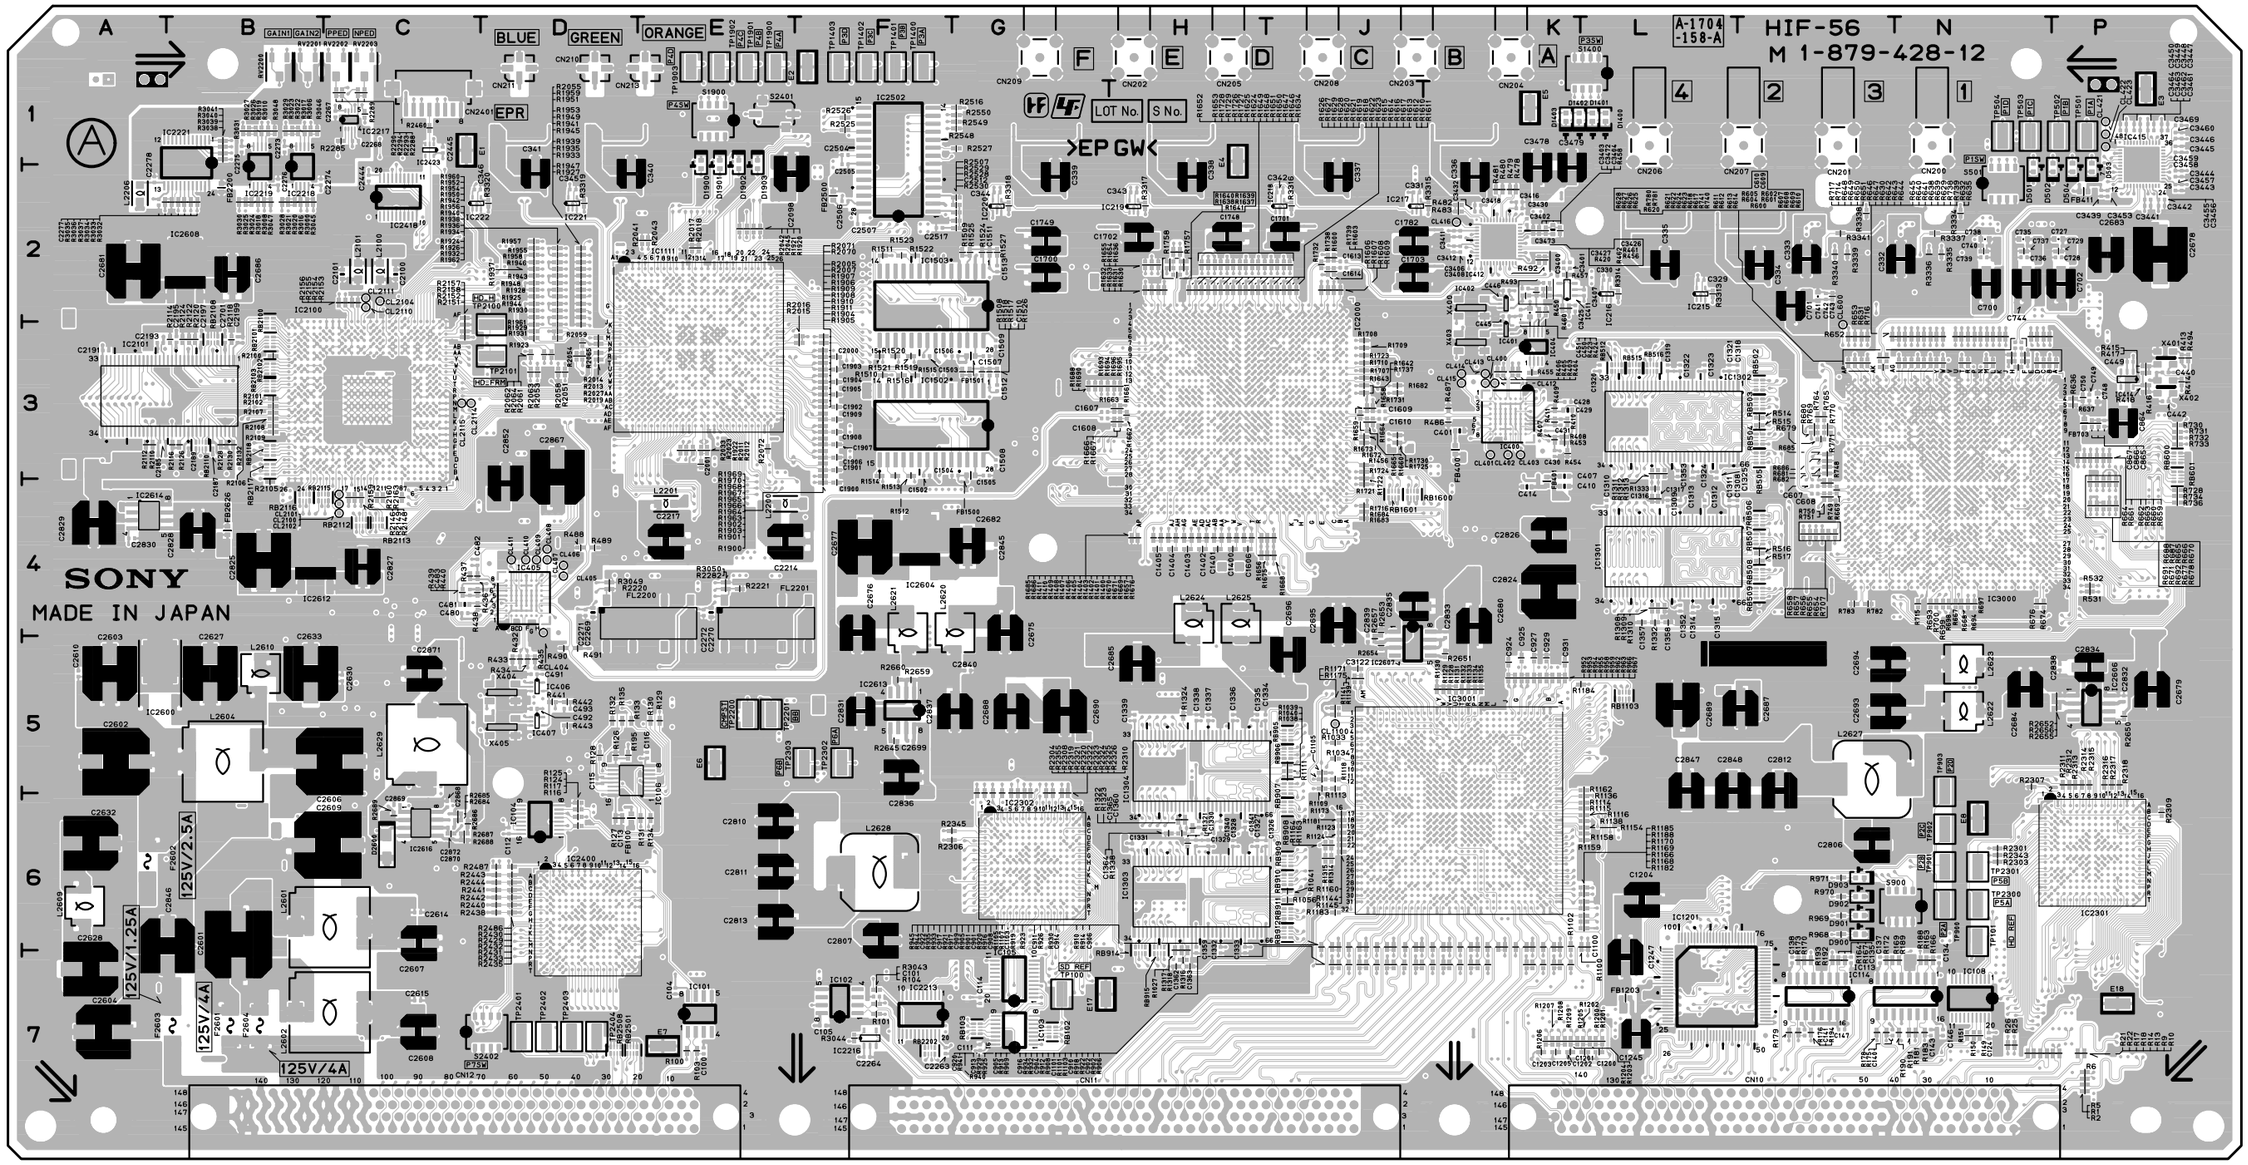

HIF-56 -A SIDE-
SUFFIX: -12

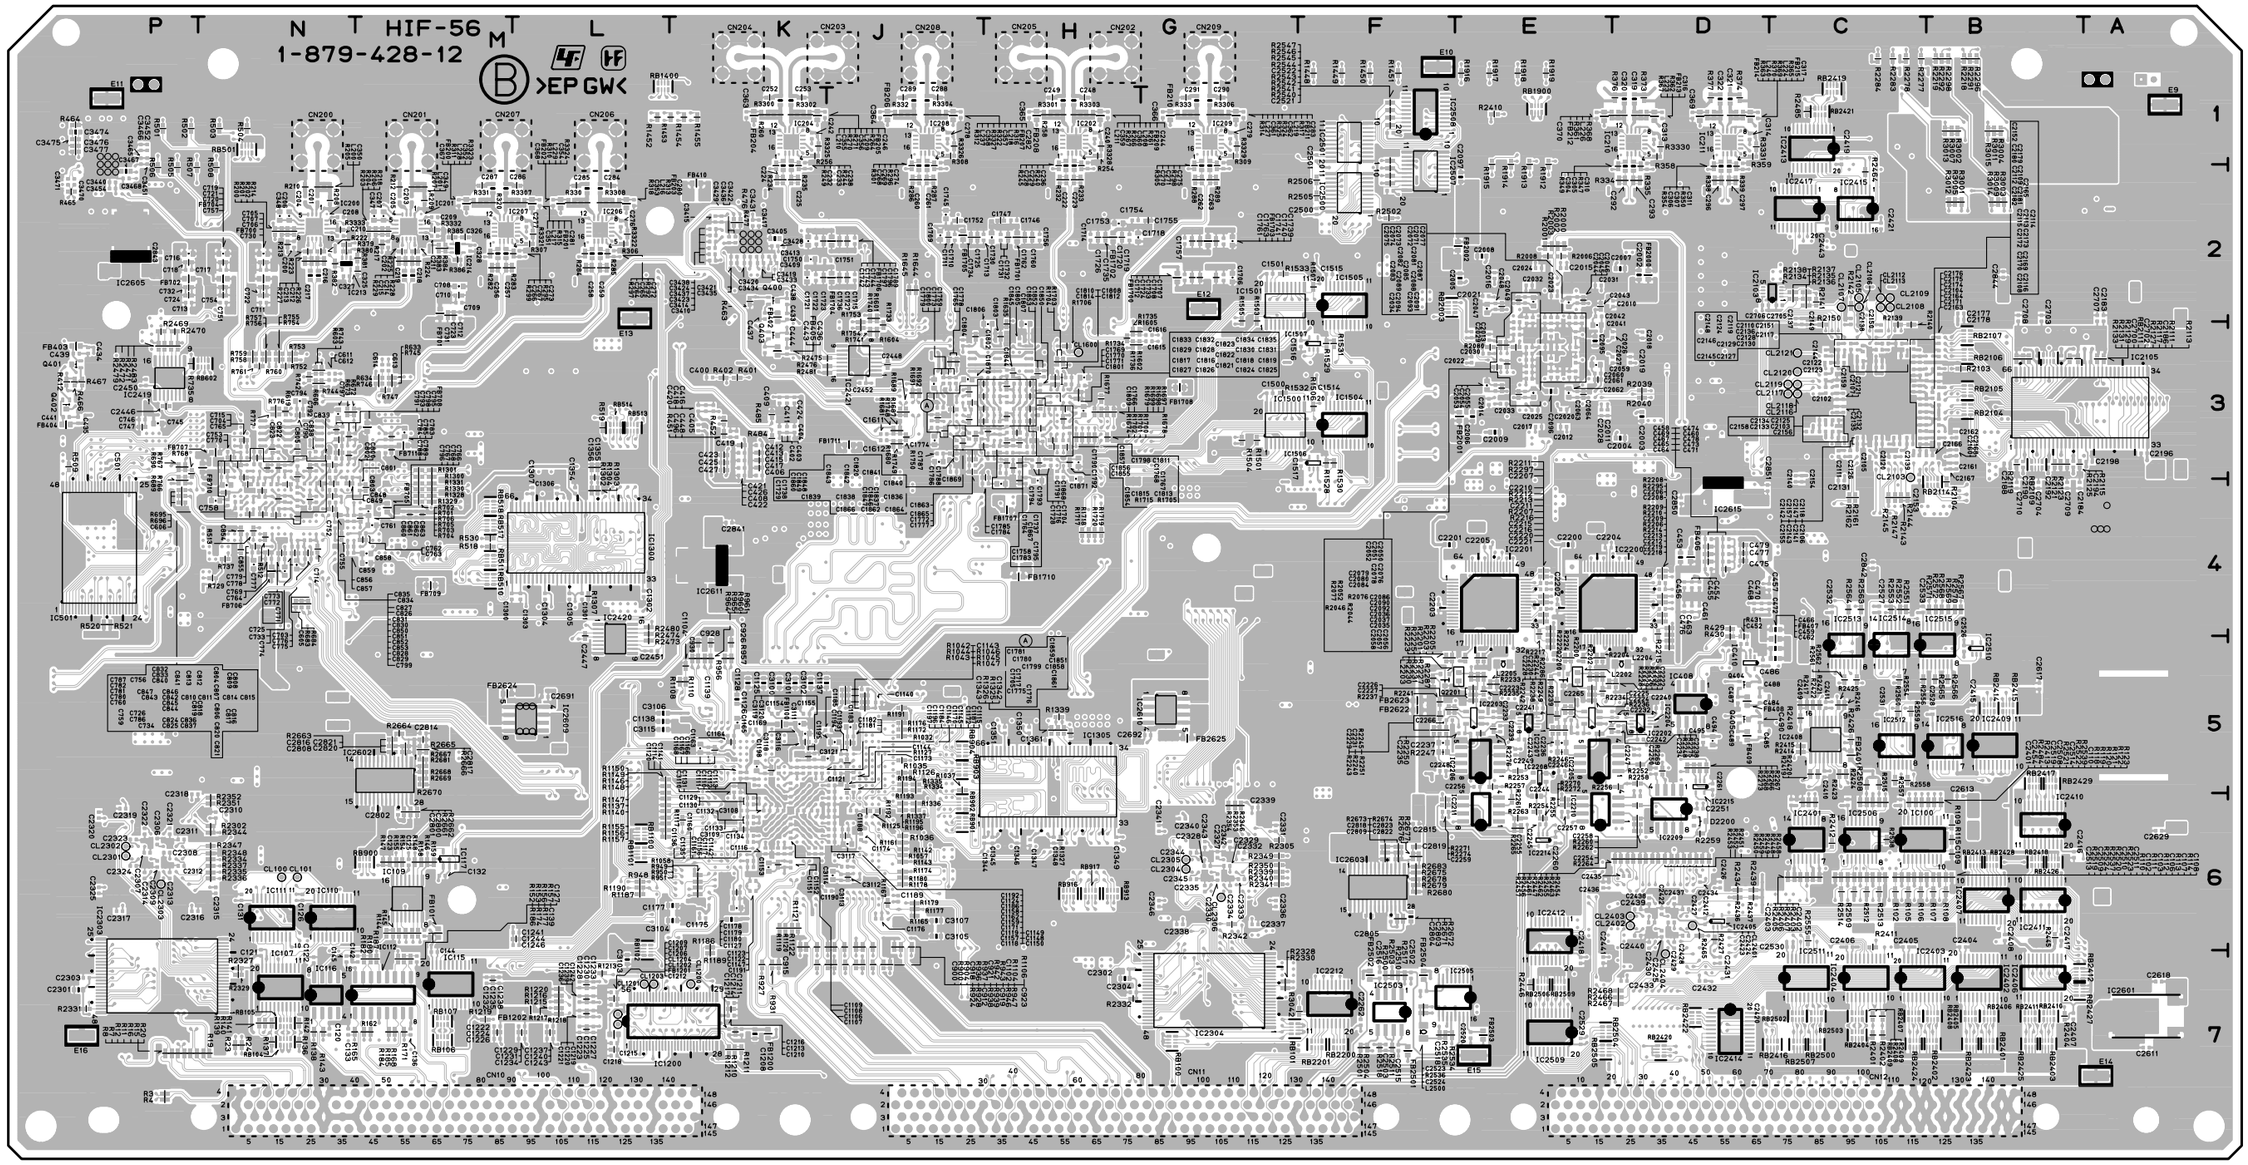

HIF-56 -B SIDE-
SUFFIX: -12

HP-135 (1-874-872-12)

C1	B2
C2	B1
C3	B2
C4	B2
C5	C1
C6	C1
C7	B1
C8	C1
C9	B1
C10	B2
C11	C1
C12	B1
C13	B2
C14	B2
C15	B2
C16	B2
C17	A1
C18	B1
C19	A2
C20	B2
C21	A2
C22	A2
CN1	A2
CN2	C2
CN3	C1
CN4	C2
CN5	C2
D1	A1
D2	A1
F1	C2
IC1	B2
IC2	B2
IC3	A1
IC4	B1
IC5	A2
IC6	B2
Q1	A1
R1	B1
R2	B2
R3	B2
R4	B2
R5	B2
R6	B2
R7	B1
R8	B2
R9	B2
R10	B2
R11	B2
R12	B2
R13	B2
R14	B2
R15	B2
R16	B2
R17	B2
R18	B2
R19	A1
R20	B1
R21	A2
R22	B2
R23	A1
R24	A1
R25	A2
R26	A2
R27	A1
RV1	A2
RY1	A2

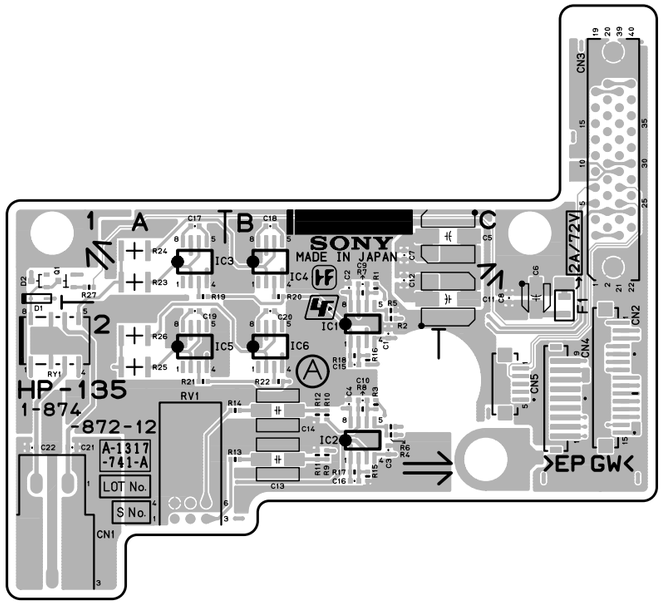

HP-135 -A SIDE-
SUFFIX: -12

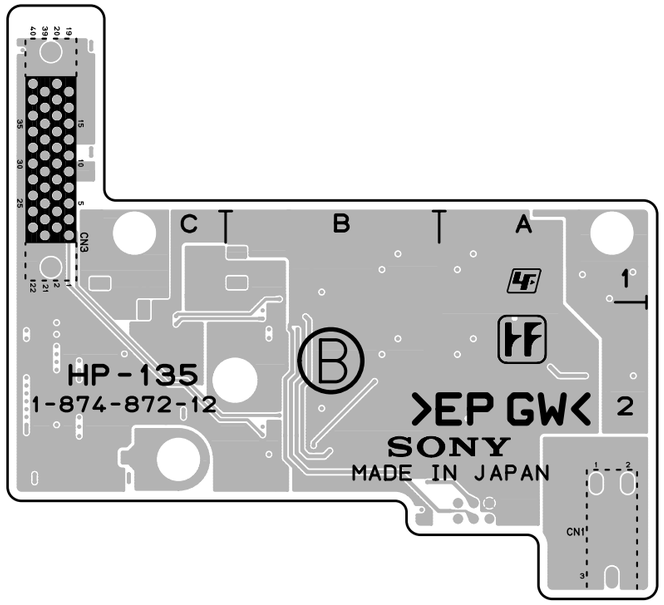

HP-135 -B SIDE-
SUFFIX: -12

HPR-22 (1-874-861-11)

C1	B5	C301	*P2	C543	*M4	C635	*M4	C929	*L1	C1268	*H4	C1411	*F2	CL230	*N2	D701	J1	IC1405	B1	R116	*N5	R510	N4	R809	J1	R1161	G5	R1257	J4	R1501	D5	R1623	G2
C2	A5	C302	*P2	C544	*N5	C636	*P4	C930	*L1	C1269	*H5	C1412	*G2	CL231	N1	D702	J1	IC1406	C1	R117	N5	R511	N4	R810	*J2	R1162	G5	R1258	G4	R1502	D5	R1624	G2
C3	B5	C303	*P2	C545	*N4	C637	*N4	C931	*L1	C1270	*J5	C1413	F2	CL232	*N2			IC1407	C1	R118	N5	R512	N4	R811	J1	R1163	G5	R1259	G4	R1503	D5	R1625	G2
C4	B4	C304	*P2	C546	*M4	C638	*N4	C932	*L1	C1271	*H4	C1414	F2	CL233	*N2	E1	A1	IC1408	C1	R119	*N5	R513	N4	R812	J1	R1164	G5	R1260	J4	R1504	*C5	R1626	G2
C5	C4	C305	*N2	C547	*M4	C639	*M4	C1001	J5	C1272	*H4	C1415	G2	CL234	N1	E2	E1	IC1409	L4	R120	*N5	R514	N4	R813	J1	R1165	G5	R1261	J4	R1505	D5		
C6	B4	C306	*P2	C548	*N4	C640	*M4	C1002	J5	C1273	*H4	C1416	*G2	CL235	N1	E3	E5	IC1410	L4	R121	*M5	R515	P4	R814	J1	R1166	G5	R1262	G4	R1506	D5	RB1501	C5
C7	A4	C307	*N2	C549	*M4	C641	*M5	C1003	J5	C1274	*H4	C1417	*G2	CL236	N1	E4	G1	IC1500	D2	R122	*N5	R516	P4	R815	J1	R1167	G5	R1263	G4	R1507	D5	RB1502	*C5
C8	A4	C308	*N2	C550	*N4	C642	*P5	C1108	F4	C1275	*H4	C1418	B2	CL237	*N2	E5	K1	IC1510	D5	R123	*M5	R517	P4	R816	J1	R1168	G5	R1264	J4	R1508	D5	RB1503	*C5
C9	*B4	C309	*M1	C551	*M4	C643	*N4	C1109	F4	C1276	*H5	C1419	C2	CL238	N1	E6	N1	IC1511	C5	R124	*M5	R518	P4	R817	*J2	R1169	G5	R1265	J5	R1509	D5	RB1504	C5
C10	*C4	C310	*M1	C552	*M5	C644	*N4	C1110	*G4	C1277	*J5	C1420	B1	CL239	N1	E7	L4	IC1512	C5	R125	N5	R519	P4	R818	J1	R1170	G5	R1266	J5	R1510	D5	RB1505	*C5
C11	*B4	C311	*L1	C553	*N5	C645	*M4	C1111	F4	C1278	*H4	C1421	C1	CL240	*N2	E8	P5	IC1513	D5	R126	M5	R520	P4	R819	K1	R1171	G5	R1267	H5	R1511	D5	RB1506	*C5
C12	*A4	C312	*L1	C554	*N4	C646	*N4	C1112	F4	C1279	*H4	C1422	C1	CL241	N1	E9	*A5	IC1514	*C5	R127	*M5	R521	P4	R820	K1	R1172	G5	R1268	H5	R1512	D5	RB1507	*C5
C13	*A4	C313	*L1	C555	*M4	C647	*M4	C1113	F4	C1280	*H4	C1423	C1	CL242	*N2	E10	*A1	IC1516	*D4	R128	*M5	R522	P4	R821	K1	R1173	G5	R1269	H5	R1513	D5	RB1508	C5
C21	F3	C314	*L2	C556	*M4	C648	*N4	C1114	F4	C1281	*H4	C1501	D5	CL401	N3	E11	*E5	IC1517	F3	R129	M5	R523	N5	R822	K1	R1174	G5	R1270	H5	R1514	D5	RB1509	C5
C22	D3	C315	*L1	C557	*M4	C701	K5	C1115	F4	C1282	*H4	C1502	D5	CL402	N3	E12	*E1	IC1518	D2	R130	M5	R524	N5	R823	*K2	R1175	G5	R1271	J4	R1515	D5	RB1510	C5
C23	*E3	C316	*L2	C558	*N4	C702	L5	C1116	*G5	C1283	*J4	C1503	D5	CL403	N4	E13	*L4	IC1519	E1	R131	*M5	R525	N5	R824	K1	R1176	*F4	R1272	J5	R1516	F3	RB1511	C5
C24	E3	C317	*M2	C559	*M4	C703	K5	C1117	*G5	C1284	*H4	C1504	C5	CL404	N4	E14	*K1	IC1520	*C4	R132	*M5	R526	N5	R825	K1	R1177	*F4	R1273	J5	R1517	F3	RB1512	C5
C25	D3	C318	*M2	C560	*N5	C704	L5	C1118	*F5	C1285	*H4	C1505	C5	CL405	M4	E15	*P5	IC1521	E2	R133	M5	R527	N5	R826	J1	R1178	G4	R1274	H5	R1518	G3	RB1513	*C5
C26	*E3	C319	*L2	C561	*N4	C705	K5	C1119	*F5	C1286	*J4	C1506	D5	CL406	M4	E16	*N1	IC1601	*N1	R134	M5	R528	N5	R827	J1	R1179	G4	R1275	H5	R1519	G3	RB1514	*C5
C27	*E3	C320	*L2	C562	*N4	C706	L5	C1120	*G5	C1287	*H4	C1507	*C5	CL407	M4	E1401	F2	IC1602	*N1	R135	*M5	R529	N5	R828	J2	R1180	G4	R1276	H5	R1520	F2	RB1515	C5
C28	*D3	C321	*L2	C563	*M4	C707	K5	C1121	*F5	C1288	*H4	C1508	G3	CL408	M4			IC1603	G3	R136	*M5	R530	N5	R829	J2	R1181	G4	R1277	H5	R1521	F2	RB1516	C5
C29	E3	C322	*L2	C564	*N4	C708	*K5	C1122	*F5	C1289	*J4	C1510	*D4	CL409	M4	F1	B5	IC1604	*G5	R137	M5	R531	M4	R830	J2	R1182	G4	R1278	J4	R1522	F2	RB1517	D5
C30	*D3	C323	*L2	C565	*M4	C709	*K4	C1123	*F5	C1290	*J5	C1511	F2	CL410	N4	F2	A5	IC1605	*G5	R138	M5	R532	M4	R831	J2	R1183	G4	R1279	H4	R1523	E2	RB1518	*F3
C31	*D4	C324	*L2	C566	*M4	C710	*K4	C1124	*F5	C1291	*H5	C1512	*F3	CL411	N4	F3	B5	IC1606	E5	R139	M5	R533	L4	R901	*H2	R1184	G4	R1280	J4	R1524	E1	RB1519	*G2
C32	*D3	C325	*M3	C567	*N4	C711	*L5	C1125	*F5	C1292	*H4	C1513	*G3	CL412	M4			IC1607	K4	R140	M5	R534	M4	R902	*J2	R1185	G4	R1281	H4	R1525	*D2	RB1520	D5
C33	*D3	C326	*M3	C568	*N4	C712	*L4	C1201	*J5	C1293	*J4	C1514	*G3	CL413	M4	FB51	C4	IC1608	G5	R201	N2	R535	L4	R903	*H2	R1186	G4	R1282	H4	R1526	*D2	RB1521	C5
C34	D3	C327	*L2	C569	*N4	C713	*L4	C1202	*H4	C1294	*J4	C1515	*F3	CL414	M5	FB52	P4			R202	M1	R536	M4	R904	*K3	R1187	G4	R1283	H4	R1527	*D2	RB1522	C4
C35	E3	C328	*L2	C570	*M4	C714	*L5	C1203	*H4	C1295	*G4	C1516	D2	CL415	M5	FB53	P4	L1	B4	R203	M1	R537	M4	R905	*L3	R1188	G4	R1284	*J4	R1528	*D2	RB1523	E2
C36	*E3	C329	*L3	C571	*M4	C715	*L4	C1204	*H4	C1296	*G4	C1517	E1	CL416	M5	FB54	G3	L2	C4	R204	N2	R538	M4	R906	*L3	R1189	G4	R1285	G4	R1529	*D2	RB1524	E2
C37	*E3	C330	*L3	C572	*N4	C716	*L4	C1205	*H4	C1297	*J4	C1518	*C4	CL417	M5	FB55	G3	L3	B4	R205	N2	R539	N4	R907	*K2	R1190	G4	R1286	H4	R1530	*D2	RB1525	E2
C38	E3	C331	*L3	C573	*M4	C717	*L5	C1206	*H4	C1298	*H4	C1519	E2	CL501	P5	FB501	*P4	L4	A4	R206	N2	R540	N4	R908	*L2	R1191	G4	R1287	H4	R1531	*D2	RB1526	D2
C39	D4	C332	*L3	C574	*N4	C718	*L4	C1207	*H4	C1299	*H4	C1520	*D2	CL706	L5	FB502	P4	L5	A4	R207	N2	R541	M4	R909	*L2	R1192	G4	R1288	G4	R1532	*D2	RB1527	D2
C40	F4	C401	M5	C575	*N4	C719	*L4	C1208	*H4	C1300	*J4	C1521	*D2	CL707	J5	FB503	*N4	L21	E3	R208	P2	R542	M4	R910	*K1	R1193	G4	R1289	H4	R1533	D2	RB1601	*K3
C41	G3	C402	M4	C576	*N4	C801	*J1	C1209	*H4	C1301	*J4	C1522	*D2	CL708	J5	FB504	*N4	L22	E4	R209	N2	R543	M4	R911	*L1	R1194	G4	R1290	H4	R1534	D2	RB1602	*N1
C42	P4	C403	M4	C577	*N4	C802	*K3	C1210	*H4	C1302	*J5	C1523	*D2	CL713	L5	FB505	*M4	L23	F3	R210	N2	R544	L4	R912	*L1	R1195	G4	R1291	*J4	R1535	D2	RB1603	*N1
C51	D4	C404	L5	C578	*N4	C803	J3	C1211	*H4	C1303	*J5	C1524	*D2	CL714	L4	FB506	*M4	L24	P4	R211	P2	R545	P4	R1001	J5	R1196	G4	R1296	*G4	R1536	D2	RB1604	*N1
C52	D4	C405	L4	C579	*N4	C804	J3	C1212	*H4	C1304	*J4	C1525	*E2	CL715	L5	FB507	*M5			R212	N2	R546	P4	R1002	J5	R1197	G5	R1297	*G4	R1537	D2	RB1605	*N1
C53	*H4	C406	L4	C580	*N4	C805	K3	C1213	*H4	C1305	*J4	C1526	*D2	CL716	J4	FB508	*P5	Q21	E3	R213	N2	R547	P4	R1003	J5	R1198	G5	R1300	G4	R1538	D2	RB1606	*N1
C54	*F4	C407	L5	C581	*N4	C806	J1	C1214	*H4	C1306	*J4	C1527	*D2	CL717	J4	FB509	*N4	Q22	D3	R214	P2	R548	P4	R1004	J5	R1199	G5	R1301	G4	R1539	D2	RB1607	*N1
C55	*H4	C408	L4	C582	*N4	C807	*J1	C1215	*J4	C1307	*J4	C1528	*D2	CL801	J3	FB510	*N4	Q23	D4	R215	N2	R549	M4	R1005	J5	R1200	G5	R1302	*H4	R1540	D2	RB1608	*N1
C56	*F4	C409	L4	C583	*N4	C808	*J2	C1216	*H4	C1308	*J4	C1529	*D2	CL814	J3	FB511	*M4	Q24	E4	R216	N2	R550	L4	R1006	J5	R1201	*J5	R1303	G4	R1541	D2	RB1609	*N1
C57	C4	C410	L5	C584	*N4	C809	*J2	C1217	*H4	C1309	*H4	C1601	*P1	CL815	J3	FB512	*N4	Q25	*D4	R217	P2	R551	M4	R1007	H5	R1202	*J5	R1401	L4	R1542	D2	RB1610	K4
C58	C4	C411	L4	C585	*N4	C810	*J2	C1218	*H4	C1310	*H4	C1602	*N1	CL816	J3	FB513	*M4	Q26	*E3	R218	M1	R552	M4	R1008	H5	R1203	J4	R1402	L4	R1543	D2	RB1611	E5
C59	C4	C412	L4	C586	*N4	C811	*J2	C1219	*H4	C1311	*J4	C1603	*G5	CL817	J3	FB514	*N4	Q27	E3	R219	M1	R553	P4	R1009	H5	R1204	J4	R1403	L4	R1544	D2	RB1612	F5
C101	N5	C413	L5	C587	*N5	C812	*K2	C1220	*J4	C1312	*J4	C1604	*G5	CL818	J3	FB701	L5			R220	M1	R554	P4	R1010	H5	R1205	J4	R1404	L4	R1545	D2	RB401	*L4
C102	*N5	C414	L5	C588	*M4	C813	*J2	C1221	*J4	C1313	*J4	C1605	G2	CL819	J3	FB702	L5	R21	E3	R221	M1	R555	P4	R1011	H5	R1206	*H4	R1405	G2	R1546	D2	RB701	*K4
C103	N5	C415	L5	C589	*M4	C814	*K2	C1222	*J4	C1314	*J4	C1606	*G3	CL820	J3	FB1201	*H4	R22	E3	R222	M1	R556	P4	R1012	H5	R1207	G4	R1406	G2	R1547	D2	RB801	*J3
C104	*N5	C416	L5	C590	*N4	C815	*J2	C1223	*J5	C1315	*H4	C1607	E5	CL821	J3	FB1202	*J4	R23	E3	R223	M1	R557	M4	R1101	G4	R1208	*H4	R1407	G2	R1548	D1	RB802	*J3
C105	N5	C417	L5	C591	*N4	C816	*J2	C1224	*J4	C1316	*H4	C1608	K4	CL822	J3	FB1203	*H4	R24	*D3	R224	N2	R558	M4	R1102	G4	R1209	H4	R1408	G2	R1549	E2	RB803	*J3
C106	*N5	C418	L5	C592	*N4	C817	*J2	C1225	*J4	C1317	*H4	C1609	*G3	CL823	J3	FB1204	*H4	R25	*E3	R225	N1	R559	P4	R1104	G5	R1210	H4	R1409	G2	R1550	D2	RB804	*J3
C107	N5	C501	*N4	C593	*N4	C818	*J2	C1226	*J4	C1318	*J4	C1610	*G3	CL824	J3	FB1205	*G4	R26	*E3	R226	N1	R560	P4	R1105	G4	R1211	H4	R1410	G2	R1551	E1	RB805	*K3
C108	*N5	C502	*M4	C594	*N4	C819	*J2	C1227	*J4	C1319	*H4	C1611	*G3	CL825	J3	FB1206	*G5	R27	*E3	R227	N1	R561	M4	R1106	G4	R1212	H4	R1411	G2	R1552	D2	RB806	*K3
C109	N5	C503	*M4	C595	*M4	C820	*K2	C1228	*J4	C1320	*H4	C1612	*G2	CL826	J3	FB1207	*G5	R28	*E3	R228	N1	R562	M4	R1107	G4	R1213	H4	R1412	G2	R1553	D1	RB807	*J3
C110	*N5	C504	*M4	C596	*M4	C821	*K2	C1229	*J4	C1321	*H4	C1613	*G2	CL827	J3	FB1208	*J5	R29	*E3	R229	*N2	R563	P4	R1108	G4	R1214	H4	R1413	L4	R1554	D1	RB808	*J3
C111	*M5	C505	*M4	C597	*M4	C822	*K2	C1230	*J4	C1322	*H4	C1614	*G2	CL828	J3	FB1209	*J4	R30	E3	R230	N2	R564	P4	R1109	G4	R1215	H4	R1414	F1	R1555	D2	RB809	*J3
C112	*M5	C506	*M4	C598	*M4	C823	*K2	C1231	*H4	C1323	*J4	C1615	*G2	CL829	J3	FB1210	*J4	R31	E3	R301	*P2	R565	*N4	R1110	G4	R1216	H4	R1415	F1	R1556	D2	RB810	*J3
C113	M5	C507	*M4	C599	*M4	C824	*K2	C1232	*H4	C1324	*H4	C1616	*G3	CL830	J3	FB1211	*G5	R32	*E3	R302	*N2	R566	P5	R1111	G4	R1217	J4	R1416	G1	R1557	D2		
C114	*M5	C508	*N4	C600	*M4	C825	*K2	C1233	*H4	C1325	*H4	C1617	*G2	CL831	J3	FB1212	*J4	R34	E3	R303	*P2	R567	P5	R1112	G4	R1218	K4	R1417	*G2	R1558	D1	S101	L4
C115	M5	C509	*M4	C601	*N4	C826	*J2	C1234	*H4	C1326	*H4	C1618	G5	CL832	J3	FB1213	*G4	R35	E3	R304	*L1	R568	M5	R1113	G4	R1219	J4	R1418	*F2	R1559	D2	S102	K5
C116	*M5	C510	*M4	C602	*N4	C827	*K2	C1235	*H4	C1327	*H4			CL833	J3	FB1214	*J4	R36	*E4	R305	*L1	R569	*M4	R1114	G4	R1220	J4	R1419	*F2	R1560	D2	S104	E2
C117	M5	C511	*N4	C603	*N4	C828	*K2	C1236	*H4	C1328	*H4	CL21	*E3	CL834	J2	FB1215	G3	R37	*E3	R306	*L1	R570	*M4	R1115	G4	R1221	J4	R1420	*F2	R1561	D1		
C118	*M5	C512	*M4	C604	*N5	C829	*K2	C1237	*H4	C1329	*H4	CL100	P5	CL835	J3	FB1501	F2	R38	*E3	R307	*L2	R571	*M4	R1116	G4	R1222	H5	R1421	*G2	R1562	*D2	TP401	L4
C119	M5	C513	*M4	C605	*N5	C830	*J2	C1238	*J4	C1330	*J4	CL101	P5	CL836	J2	FB1601	*G3	R39	*E3	R308	*L2	R572	*N4	R1117	G4	R1223	H5	R1422	*G2	R1563	*D2	TP402	L4
C120	M5	C514	*N4	C606	*N4	C831	*J2	C1239	*H4	C1331	*G4	CL201	P1	CL837	J3			R40	*E4	R309	*L2	R573	P5	R1118	G4	R1224	H5	R1423	*F2	R1564	*D2	TP403	L4
C201	P2	C515	*N4	C607	*N4	C901	*H2	C1240	*G5	C1332	*J4	CL202	P2	CL838	J3	IC21	*E3	R41	*E4	R310	*L3	R574	P5	R1119	G4	R1225	H5	R1424	C1	R1565	*D2	TP404	L4
C202	P3	C516	*N4	C608	*N4	C902	*H2	C1241	*H4	C1333	*J5	CL203	P2	CL839	J1	IC22	C4	R42	E4	R311	*L3	R575	M5	R1120	G4	R1226	H5	R1425	B1	R1566	*D2	TP701	K5
C203	M3	C517	*M4	C609	*N4	C903	*H2	C1242	*H4	C1334	*G4	CL204	P2	CL840	*J2	IC100	N4	R43	E4	R312	*L3	R576	*M4	R1121	G4	R1227	H5	R1426	C1	R1567	*D2	TP702	K5
C204	*N2	C518	*N4	C610	*N4	C904	*H2	C1243	*G5	C1335	*H4	CL205	*N2	CL841	J1	IC101	M2	R44	E4	R401	M1	R577	*M4	R1122	G4	R1228	H5	R1427	B1	R1568	*D2	TP703	K5
C205	*N2	C519	*N4	C611	*N4	C905	*H2	C1244	*H4	C1336	*H4	CL206	N2	CL842	J1	IC201	P2	R51	D4	R402	M1	R578	*M4	R1123	G4	R1229	H5	R1428	C1	R1569	D1	TP704	K5
C206	*N2	C520	*M4	C612	*N4	C906	*H2	C1245	*H4	C1337	*H4	CL207	N2	CL843	J1	IC300	P2	R52	D4	R403	M4	R579	P5	R1124	G4	R1230	G4	R1429	D5	R1570	E2	TP1601	H1
C207	*M2	C521	*N4	C613	*N4	C907	*H2	C1246	*H5	C1338	*G4	CL208	N2	CL844	J1	IC301	L1	R53	C4	R404	M4	R580	P5	R1125	G4	R1233	G4	R1430	C1	R1601	*M3	TP1602	J1
C208	*M2	C522	*N4	C614	*N4	C908	*H2	C1247	*H4	C1339	*G5	CL209	*N2	CL845	J1	IC302	L2	R54	C4	R405	M4	R701	*K5	R1126	G4	R1234	G4	R1431	D5	R1602	*K3		
C209	*M2	C523	*N4	C615	*N4	C909	*L2	C1248	*H4	C1340	*G5	CL210	N2	CL846	*J2	IC303	L3	R55	*E3	R406	M4	R702	*L5	R1128	G4	R1235	H4	R1432	C1	R1603	K3	*:B SIDE	
C210	*N2	C524	*N4	C616	*N4	C910	*K3	C1249	*H5	C1341	*J5	CL211	M1	CL847	J1	IC601	M5	R56	*D4	R409	L5	R703	*L5	R1131	G5	R1236	H4	R1433	D5	R1604	*M1		
C211	*M2	C525	*N4	C617	*N4	C911	*K3	C1250	*H4	C1342	*J4	CL212	P2	CL848	K1	IC700	H4	R57	E3	R410	L5	R704	*L5	R1132	*G5	R1237	J4	R1434	C1	R1605	*M1		
C212	*M2	C526	*N4	C618	*N4	C912	*L3	C1251	*H4	C1343	*J4	CL213	*N2	CL1201	J5	IC701	*L5	R58	E3	R411	L5	R705	*L5	R1144	G4	R1238	J4	R1435	C1	R1606	*G5		
C213	*M2	C527	*N4	C619	*N4	C913	*L3	C1252	*H4	C1344	*G5	CL214	N1	CL1601	K4	IC702	J2	R59	E3	R412	*M5	R706	*K5	R1145	G4	R1239	H5	R1436	D5	R1607	*G5		
C214	*M2	C528	*N4	C620	*N4	C914	*L3	C1253	*H4	C1345	*J4	CL215	N1	CL1602	K4	IC801	*K3	R101	N5	R413	L5	R707	*K5	R1146	G4	R1240	H5	R1437	C1	R1608	G2		
C215	*M2	C529	*N4	C621	*N4	C915	*L3	C1254	*H4	C1346	*G4	CL216	*N2			IC802	*J3	R102	N5	R414	*M5	R708	J1	R1147	G4	R1242	J4	R1438	C1	R1609	G2		
C216	*M2	C530	*N4	C622	*N4	C916	*L2	C1255	*H4	C1347	*J4	CL217	*N2	CN4	M5	IC803	*K3	R103	*N5	R415	M4	R709	J1	R1148	G4	R1243	J4	R1439	C1	R1610	*G3		
C217	*M2	C531	*N4	C623	*N4	C917	*K2	C1256	*J5	C1349	*G4	CL218	N1	CN5	G5	IC804	*J1	R104	*N5	R416	*M5	R710	J4	R1149	G4	R1244	J4	R1440	C1	R1611	G3		
C218	*N2	C532	*N4	C624	*M4	C918	*K2	C1257	*H4	C1351	*H4	CL219	N1	CN6	C5	IC900	H2	R105	N5	R417	*L5	R711	J4	R1150	G4	R1245	J4	R1441	C1	R1612	G3		
C219	*N2	C533	*N4	C625	*M4	C919	*L2	C1258	*H4	C1401	L4	CL220	*N2	CN101	L3	IC901	L3	R106	N5	R418	*L5	R712	K4	R1151	G4	R1247	G4	R1442	D5	R1613	G3		
C220	*N2	C534	*N4	C626	*M4	C920	*L2	C1259	*H4	C1402	L4	CL221	N1	CN102	M1	IC902	L2	R107	*N5	R501	*N5	R713	J4	R1152	G4	R1248	G4	R1443	D5	R1614	G3		
C221	*N2	C535	*N4	C627	*M4	C921	*L2	C1260	*H4	C1403	L4	CL222	N1	CN300	C1	IC903	L1	R108	*N5	R502	*N5	R801	J1	R1153	G4	R1249	G4	R1444	D5	R1615	G3		
C222	*N2	C536	*N4	C628	*M4	C922	*L2	C1261	*H4	C1404	K4	CL223	N1			IC1101	*F4	R109	N5	R503	*M5	R802	*J2	R1154	G5	R1250	J4	R1445	D5	R1616	G3		
C223	*M2	C537	*N4	C629	*M4	C923	*L2	C1262	*H4	C1405	G1	CL224	N1	D21	E3	IC1102	F5	R110	N5	R504	*M5	R803	J1	R1155	G5	R1251	J4	R1446	D5	R1617	G3		
C224	*M2	C538	*M4	C630	*M4	C924	*L2	C1263	*J5	C1406	G1	CL225	N1	D22	*D3	IC1202	*G4	R111	*N5	R505	M4	R804	J1	R1156	G5	R1252	J4	R1447	B1	R1618	G3		
C225	*M2	C539	*N4	C631	*M4	C925	*K1	C1264	*H4	C1407	*G2	CL226	N1	D23	*D3	IC1401	F2	R112	*N5	R506	M4	R805	J1	R1157	G5	R1253	J4	R1448	C2	R1619	G2		
C226	*N2	C540	*M4	C632	*M4	C926	*K2	C1265	*H4	C1408	*F2	CL227	*N2	D24	E4	IC1402	F1	R113	N5	R507	N4	R806	*J2	R1158	G5	R1254	G4	R1449	C2	R1620	G2		
C227	*N2	C541	*M5	C633	*N4	C927	*L2	C1266	*H4	C1409	*F2	CL228	N1	D401	M1	IC1403	C2	R114	N5	R508	N4	R807	J1	R1159	G5	R1255	G4	R1450	G2	R1621	G2		
C228	*N2	C542	*N4	C634	*N5	C928	*L2	C1267	*H4	C1410	F2	CL229	N1	D402	M1	IC1404	C2	R115	*N5	R509	N4	R808	J1	R1160	G5	R1256	J4	R1451	G2	R1622	G2		

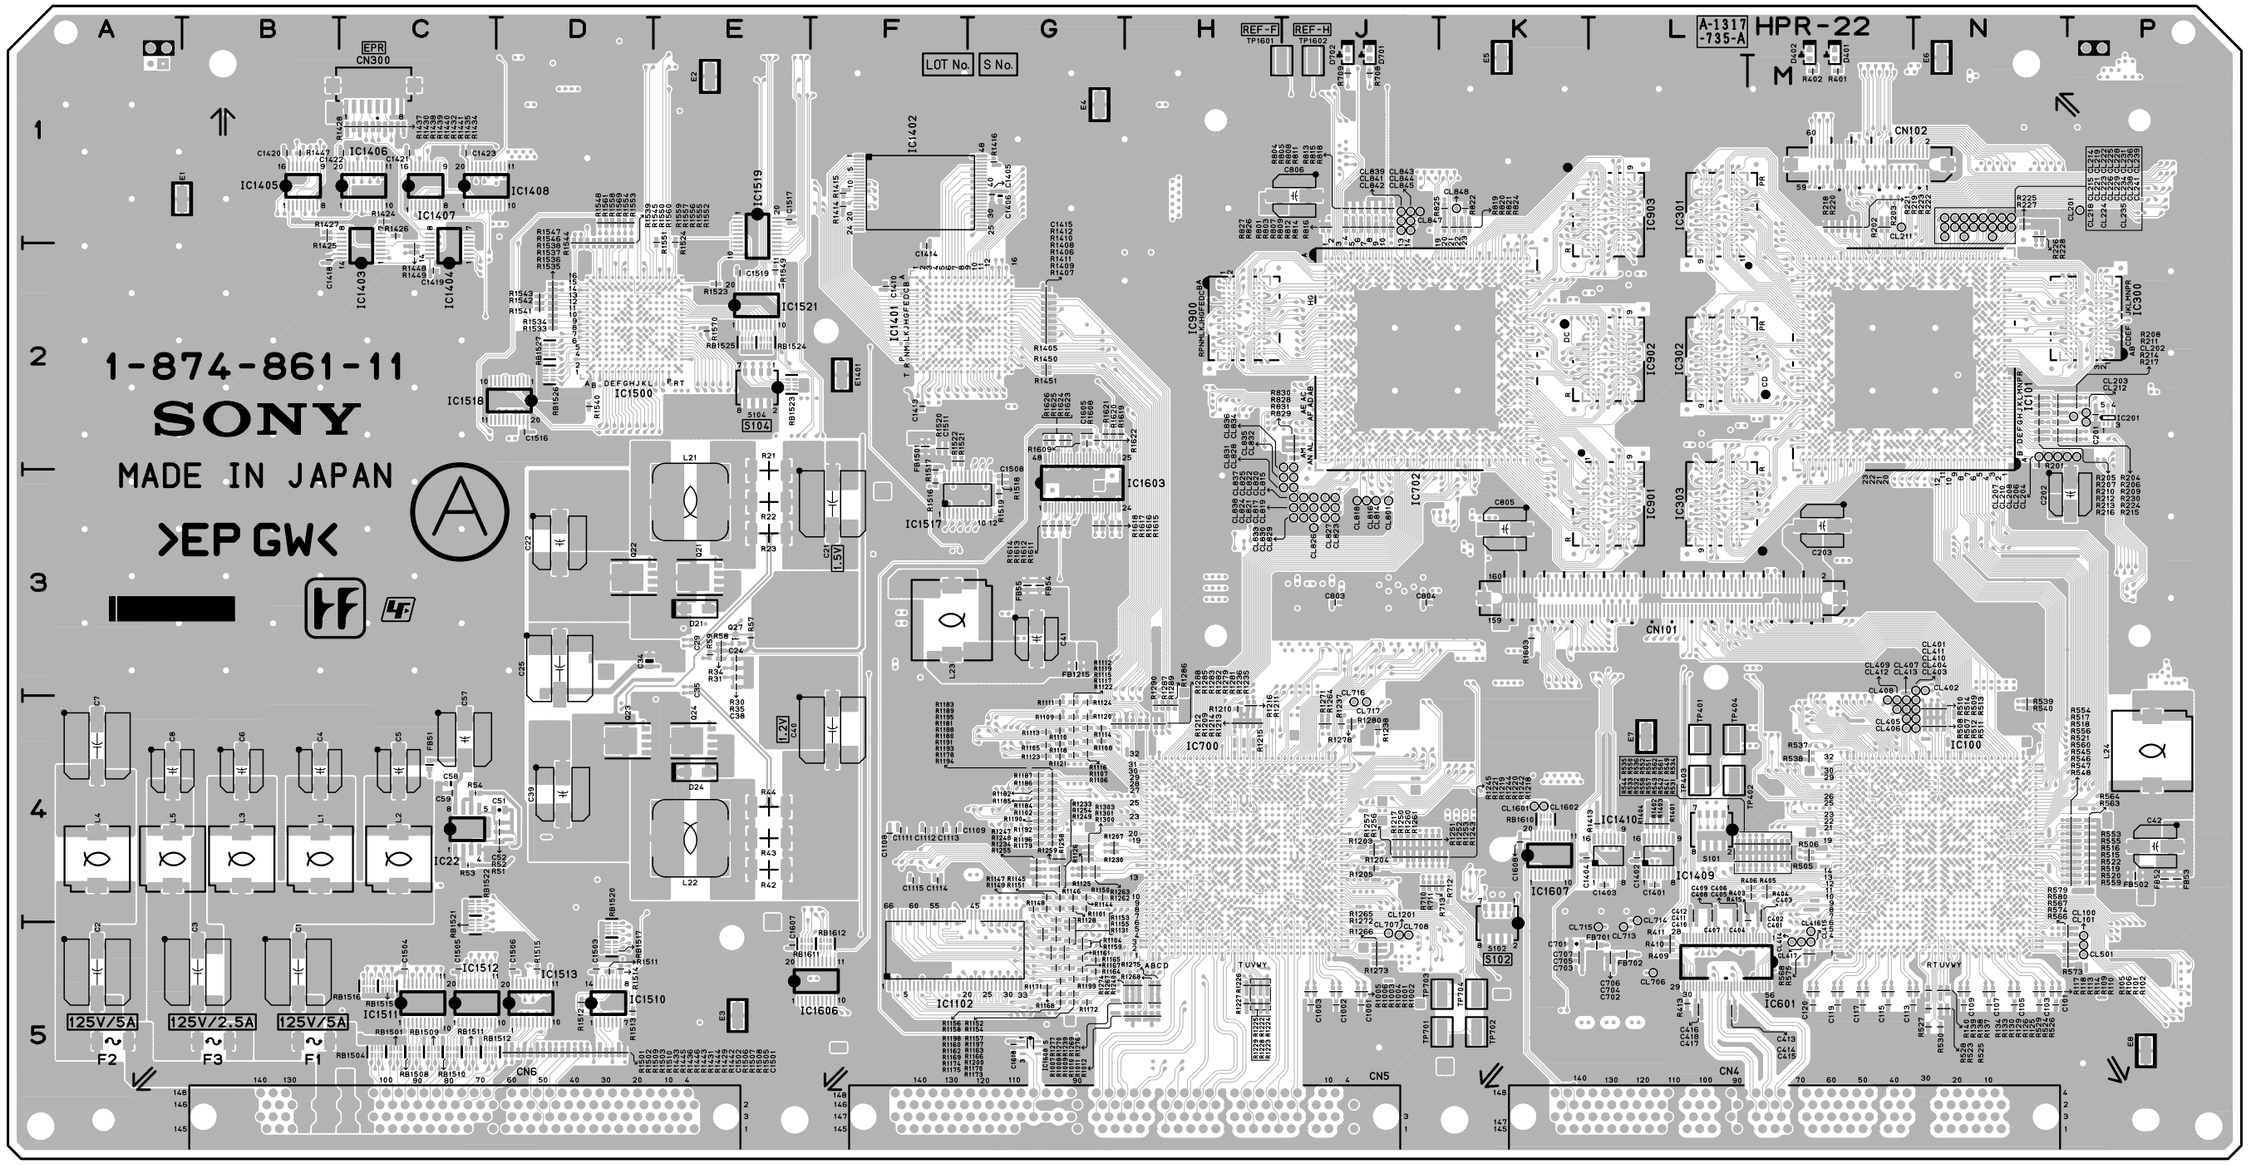

HPR-22 -A SIDE-
SUFFIX: -11

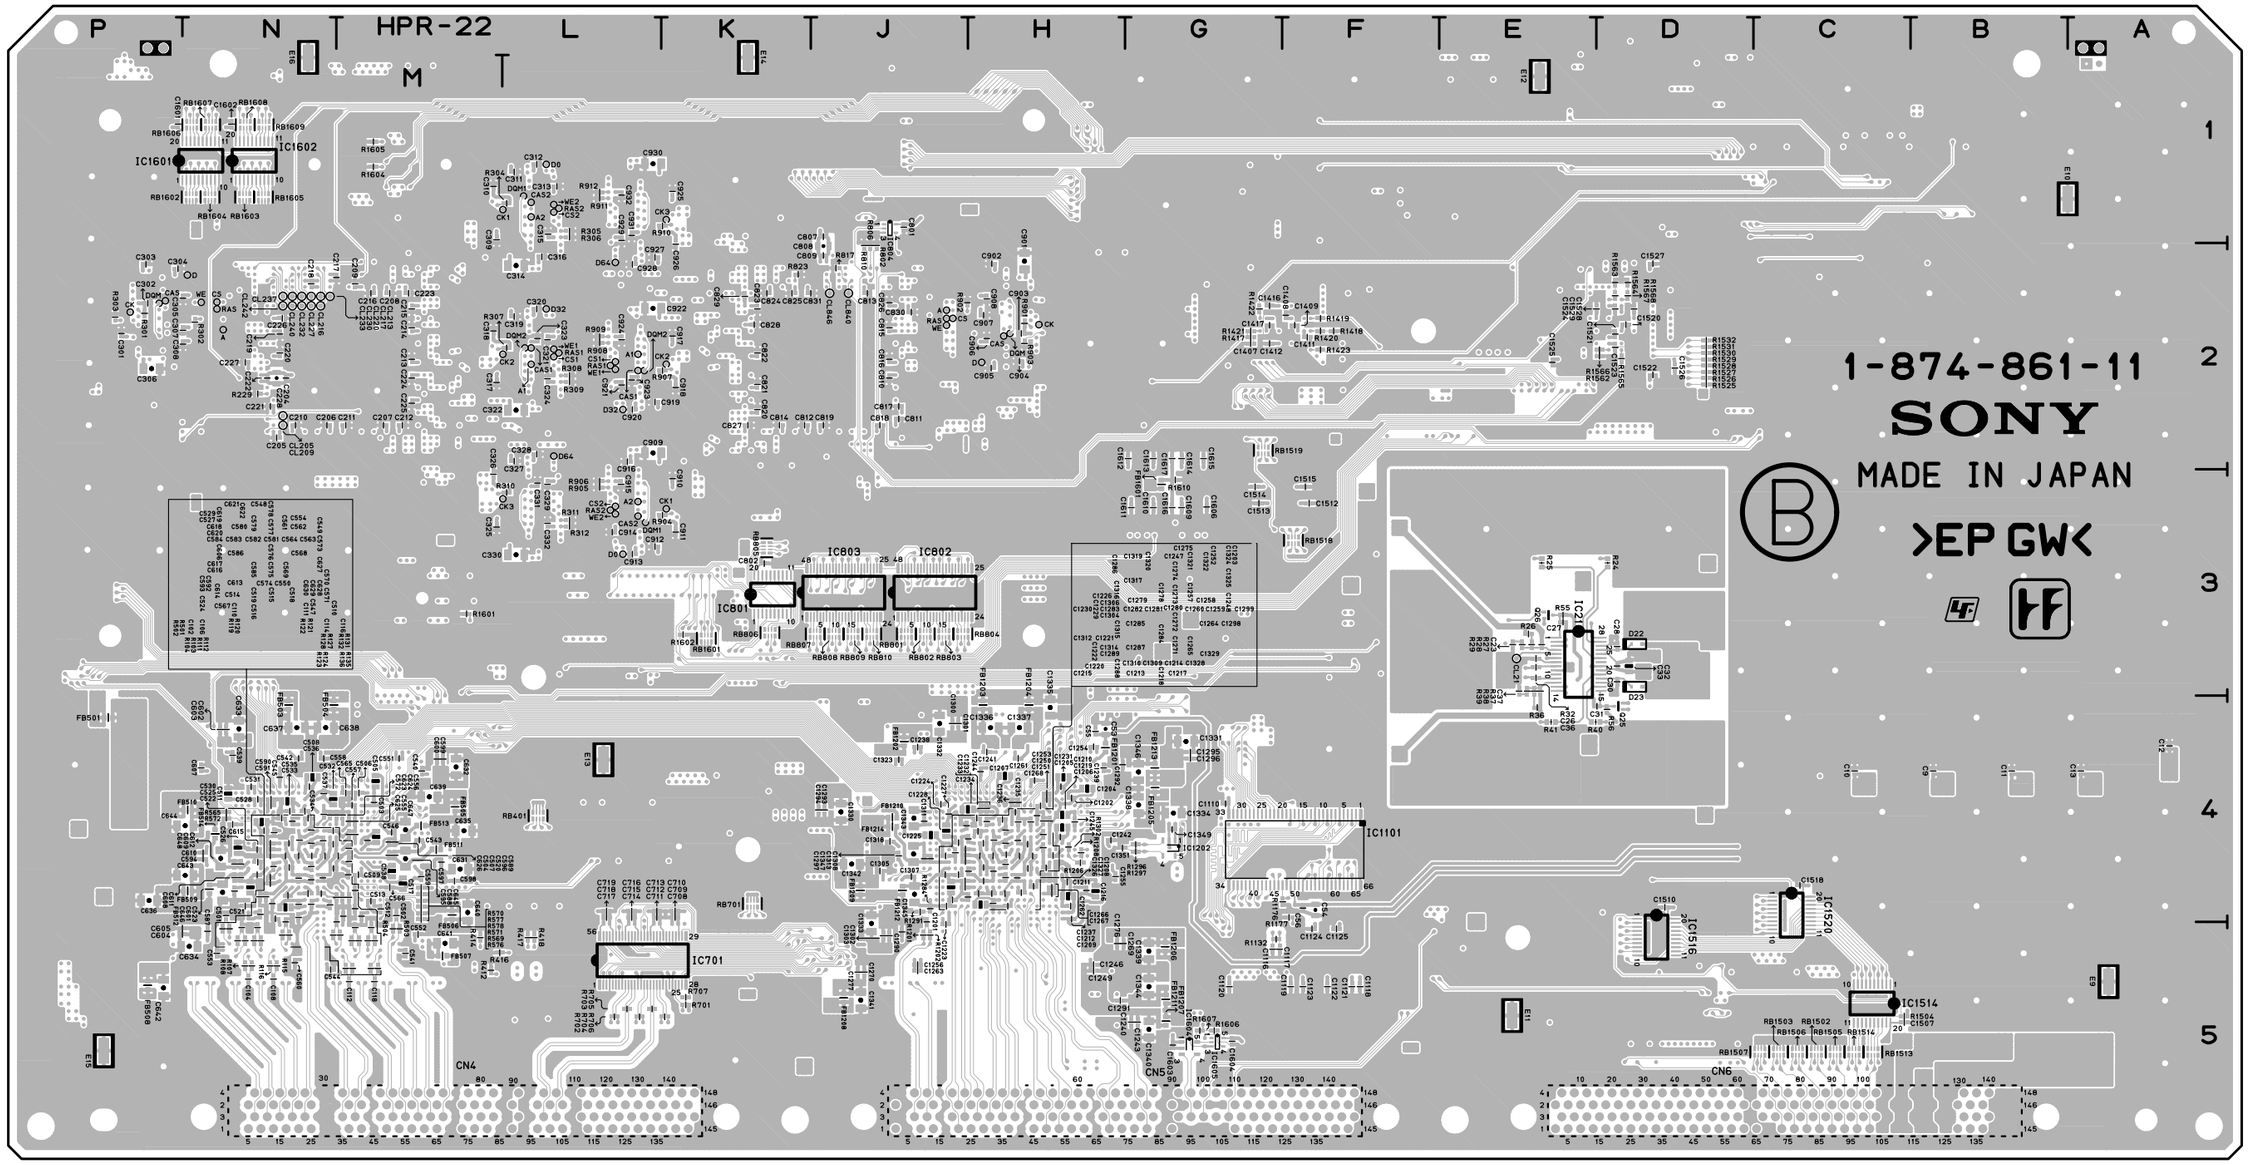

HPR-22 -B SIDE-
SUFFIX: -11

HPR-22 (1-874-861-12)

C1	B5	C301	*P2	C543	*M4	C635	*M4	C929	*L1	C1269	*H5	C1418	B2	CL237	*N2	E5	K1	IC1510	D5	R123	*M5	R507	N4	R718	*J4	R1132	*G5	R1237	J4	R1434	C1	R1571	*D2	TP404	L4
C2	A5	C302	*P2	C544	*N5	C636	*P4	C930	*L1	C1270	*J5	C1419	C2	CL238	N1	E6	N1	IC1511	C5	R124	*M5	R508	N4	R719	*J4	R1144	G4	R1238	J4	R1435	C1	R1572	*D2	TP701	K5
C3	B5	C303	*P2	C545	*N4	C637	*N4	C931	*L1	C1271	*H4	C1420	B1	CL239	N1	E7	L4	IC1512	C5	R125	N5	R509	N4	R720	*J4	R1145	G4	R1239	H5	R1436	D5	R1573	*D2	TP702	K5
C4	B4	C304	*P2	C546	*M4	C638	*N4	C932	*L1	C1272	*H4	C1421	C1	CL240	*N2	E8	P5	IC1513	D5	R126	M5	R510	N4	R721	*J4	R1146	G4	R1240	H5	R1437	C1	R1574	*D2	TP703	K5
C5	C4	C305	*N2	C547	*M4	C639	*M4	C1001	J5	C1273	*H4	C1422	C1	CL241	N1	E9	*A5	IC1514	*C5	R127	*M5	R511	N4	R722	*J4	R1147	G4	R1242	J4	R1438	C1	R1575	*D2	TP704	K5
C6	B4	C306	*P2	C548	*N4	C640	*M4	C1002	J5	C1274	*H4	C1423	C1	CL242	*N2	E10	*A1	IC1516	*D5	R128	*M5	R512	N4	R723	K4	R1148	G4	R1243	J4	R1439	C1	R1576	*D2	TP1601	H1
C7	A4	C307	*N2	C549	*M4	C641	*M5	C1003	J5	C1275	*H4	C1501	D5	CL401	N3	E11	*E5	IC1517	F3	R129	M5	R513	N4	R724	K4	R1149	G4	R1244	J4	R1440	C1	R1601	*M3	TP1602	J1
C8	A4	C308	*N2	C550	*N4	C642	*P5	C1108	F4	C1276	*H5	C1502	D5	CL402	N3	E12	*E1	IC1518	D2	R130	M5	R514	N4	R725	J4	R1150	G4	R1245	J4	R1441	C1	R1602	*K3		
C9	*B4	C309	*M1	C551	*M4	C643	*N4	C1109	F4	C1277	*J5	C1503	D5	CL403	N4	E13	*L4	IC1519	E1	R131	*M5	R515	P4	R726	J4	R1151	G4	R1247	G4	R1442	D5	R1603	K3	*:B SIDE	
C10	*C4	C310	*M1	C552	*M5	C644	*N4	C1110	*G4	C1278	*H4	C1504	C5	CL404	N4	E14	*K1	IC1520	*C4	R132	*M5	R516	P4	R727	J4	R1152	G4	R1248	G4	R1443	D5	R1604	*M1		
C11	*B4	C311	*L1	C553	*N5	C645	*M4	C1111	F4	C1279	*H4	C1505	C5	CL405	M4	E15	*P5	IC1521	E2	R133	M5	R517	P4	R801	J1	R1153	G4	R1249	G4	R1444	D5	R1605	*M1		
C12	*A4	C312	*L1	C554	*N4	C646	*N4	C1112	F4	C1280	*H4	C1506	D5	CL406	M4	E16	*N1	IC1601	*N1	R134	M5	R518	P4	R802	*J2	R1154	G5	R1250	J4	R1445	D5	R1606	*G5		
C13	*A4	C313	*L1	C555	*M4	C647	*M4	C1113	F4	C1281	*H4	C1507	*C5	CL407	M4	E1401	F2	IC1602	*N1	R135	*M5	R519	P4	R803	J1	R1155	G5	R1251	J4	R1446	D5	R1607	*G5		
C21	F3	C314	*L2	C556	*M4	C648	*N4	C1114	F4	C1282	*H4	C1508	G3	CL408	M4			IC1603	G3	R136	*M5	R520	P4	R804	J1	R1156	G5	R1252	J4	R1447	B1	R1608	G2		
C22	D3	C315	*L1	C557	*M4	C701	K5	C1115	F4	C1283	*J4	C1510	*D4	CL409	M4	F1	B5	IC1604	*G5	R137	M5	R521	P4	R805	J1	R1157	G5	R1253	J4	R1448	C2	R1609	G2		
C23	*E3	C316	*L2	C558	*N4	C702	L5	C1116	*G5	C1284	*H4	C1511	F2	CL410	N4	F2	A5	IC1605	*G5	R138	M5	R522	P4	R806	*J2	R1158	G5	R1254	G4	R1449	C2	R1610	*G3		
C24	E3	C317	*M2	C559	*M4	C703	K5	C1117	*G5	C1285	*H4	C1512	*F3	CL411	N4	F3	B5	IC1606	F5	R139	M5	R523	N5	R807	J1	R1159	G5	R1255	G4	R1450	G2	R1611	G3		
C25	D3	C318	*M2	C560	*N5	C704	L5	C1118	*F5	C1287	*H4	C1513	*G3	CL412	M4			IC1607	K4	R140	M5	R524	N5	R808	J1	R1160	G5	R1256	J4	R1451	G2	R1612	G3		
C26	*E3	C319	*L2	C561	*N4	C705	K5	C1119	*F5	C1288	*H4	C1514	*G3	CL413	M4	FB51	C4	IC1608	G5	R201	N2	R525	N5	R809	J1	R1161	G5	R1257	J4	R1452	G2	R1613	G3		
C27	*E3	C320	*L2	C562	*N4	C706	L5	C1120	*G5	C1289	*J4	C1515	*F3	CL414	M5	FB52	P4			R202	M1	R526	N5	R810	*J2	R1162	G5	R1258	G4	R1453	G2	R1614	G3		
C28	*D3	C321	*L2	C563	*M4	C707	K5	C1121	*F5	C1290	*J5	C1516	D2	CL415	M5	FB53	P4	L1	B4	R203	M1	R527	N5	R811	J1	R1163	G5	R1259	G4	R1454	G2	R1615	G3		
C29	E3	C322	*L2	C564	*N4	C708	*K5	C1122	*F5	C1291	*H5	C1517	E1	CL416	M5	FB54	G3	L2	C4	R204	N2	R528	N5	R812	J1	R1164	G5	R1260	J4	R1455	G2	R1616	G3		
C30	*D3	C323	*L2	C565	*M4	C709	*K4	C1123	*F5	C1292	*H4	C1518	*C4	CL417	M5	FB55	G3	L3	B4	R205	N2	R529	N5	R813	J1	R1165	G5	R1261	J4	R1501	D5	R1617	G3		
C31	*D4	C324	*L2	C566	*M4	C710	*K4	C1124	*F5	C1293	*J4	C1519	E2	CL501	P5	FB501	*P4	L4	A4	R206	N2	R530	N5	R814	J1	R1166	G5	R1262	G4	R1502	D5	R1618	G3		
C32	*D3	C325	*M3	C567	*N4	C711	*L5	C1125	*F5	C1294	*J4	C1520	*D2	CL706	L5	FB502	P4	L5	A4	R207	N2	R531	M4	R815	J1	R1167	G5	R1263	G4	R1503	D5	R1619	G2		
C33	*D3	C326	*M3	C568	*N4	C712	*L4	C1201	*J5	C1295	*G4	C1521	*D2	CL707	J5	FB503	*N4	L21	E3	R208	P2	R532	M4	R816	J1	R1168	G5	R1264	J4	R1504	*C5	R1620	G2		
C34	D3	C327	*L2	C569	*N4	C713	*L4	C1202	*H4	C1296	*G4	C1522	*D2	CL708	J5	FB504	*N4	L22	E4	R209	N2	R533	L4	R817	*J2	R1169	G5	R1265	J5	R1505	D5	R1621	G2		
C35	E3	C328	*L2	C570	*M4	C714	*L5	C1203	*H4	C1297	*J4	C1523	*D2	CL713	L5	FB505	*M4	L23	F3	R210	N2	R534	M4	R818	J1	R1170	G5	R1266	J5	R1506	D5	R1622	G2		
C36	*E3	C329	*L3	C571	*M4	C715	*L4	C1204	*H4	C1298	*H4	C1524	*D2	CL714	L4	FB506	*M4	L24	P4	R211	P2	R535	L4	R819	K1	R1171	G5	R1267	H5	R1507	D5	R1623	G2		
C37	*E3	C330	*L3	C572	*N4	C716	*L4	C1205	*H4	C1299	*H4	C1525	*E2	CL715	L5	FB507	*M5			R212	N2	R536	M4	R820	K1	R1172	G5	R1268	H5	R1508	D5	R1624	G2		
C38	E3	C331	*L3	C573	*M4	C717	*L5	C1206	*H4	C1300	*J4	C1526	*D2	CL716	J4	FB508	*P5	Q21	E3	R213	N2	R537	M4	R821	K1	R1173	G5	R1269	H5	R1509	D5	R1625	G2		
C39	D4	C332	*L3	C574	*N4	C718	*L4	C1207	*H4	C1301	*J4	C1527	*D2	CL717	J4	FB509	*N4	Q22	D3	R214	P2	R538	M4	R822	K1	R1174	G5	R1270	H5	R1510	D5	R1626	G2		
C40	F4	C401	M5	C575	*N4	C719	*L4	C1208	*H4	C1302	*J5	C1528	*D2	CL801	J3	FB510	*N4	Q23	D4	R215	N2	R539	N4	R823	*K2	R1175	G5	R1271	J4	R1511	D5				
C41	G3	C402	M4	C576	*N4	C801	*J1	C1209	*H4	C1303	*J5	C1529	*D2	CL814	J3	FB511	*M4	Q24	E4	R216	N2	R540	N4	R824	K1	R1176	*F4	R1272	J5	R1512	D5	RB401	*L4		
C42	P4	C403	M4	C577	*N4	C802	*K3	C1210	*H4	C1304	*J4	C1601	*P1	CL815	J3	FB512	*N4	Q25	*D4	R217	P2	R541	M4	R825	K1	R1177	*F4	R1273	J5	R1513	D5	RB701	*K4		
C51	D4	C404	L5	C578	*N4	C803	J3	C1211	*H4	C1305	*J4	C1602	*N1	CL816	J3	FB513	*M4	Q26	*E3	R218	M1	R542	M4	R826	J1	R1178	G4	R1274	H5	R1514	D5	RB801	*J3		
C52	D4	C405	L4	C579	*N4	C804	J3	C1212	*H4	C1306	*J4	C1603	*G5	CL817	J3	FB514	*N4	Q27	E3	R219	M1	R543	M4	R827	J1	R1179	G4	R1275	H5	R1515	D5	RB802	*J3		
C53	*H4	C406	L4	C580	*N4	C805	K3	C1213	*H4	C1307	*J4	C1604	*G5	CL818	J3	FB701	L5			R220	M1	R544	L4	R828	J2	R1180	G4	R1276	H5	R1516	F3	RB803	*J3		
C54	*F4	C407	L5	C581	*N4	C806	J1	C1214	*H4	C1308	*J4	C1605	G2	CL819	J3	FB702	L5	R21	E3	R221	M1	R545	P4	R829	J2	R1181	G4	R1277	H5	R1517	F3	RB804	*J3		
C55	*H4	C408	L4	C582	*N4	C807	*J1	C1215	*J4	C1309	*H4	C1606	*G3	CL820	J3	FB1201	*H4	R22	E3	R222	M1	R546	P4	R830	J2	R1182	G4	R1278	J4	R1518	G3	RB805	*K3		
C56	*F4	C409	L4	C583	*N4	C808	*J2	C1216	*H4	C1310	*H4	C1607	E5	CL821	J3	FB1202	*J4	R23	E3	R223	M1	R547	P4	R831	J2	R1183	G4	R1279	H4	R1519	G3	RB806	*K3		
C57	C4	C410	L5	C584	*N4	C809	*J2	C1217	*H4	C1311	*J4	C1608	K4	CL822	J3	FB1203	*H4	R24	*D3	R224	N2	R548	P4	R901	*H2	R1184	G4	R1280	J4	R1520	F2	RB807	*J3		
C58	C4	C411	L4	C585	*N4	C810	*J2	C1218	*H4	C1312	*J4	C1609	*G3	CL823	J3	FB1204	*H4	R25	*E3	R225	N1	R549	M4	R902	*J2	R1185	G4	R1281	H4	R1521	F2	RB808	*J3		
C59	C4	C412	L4	C586	*N4	C811	*J2	C1219	*H4	C1313	*J4	C1610	*G3	CL824	J3	FB1205	*G4	R26	*E3	R226	N1	R550	L4	R903	*H2	R1186	G4	R1282	H4	R1522	F2	RB809	*J3		
C101	N5	C413	L5	C587	*N5	C812	*K2	C1220	*J4	C1314	*J4	C1611	*G3	CL825	J3	FB1206	*G5	R27	*E3	R227	N1	R551	M4	R904	*K3	R1187	G4	R1283	H4	R1523	E2	RB810	*J3		
C102	*N5	C414	L5	C588	*M4	C813	*J2	C1221	*J4	C1315	*H4	C1612	*G2	CL826	J3	FB1207	*G5	R28	*E3	R228	N1	R552	M4	R905	*L3	R1188	G4	R1284	*J4	R1524	E1	RB1501	C5		
C103	N5	C415	L5	C589	*M4	C814	*K2	C1222	*J4	C1317	*H4	C1613	*G2	CL827	J3	FB1208	*J5	R29	*E3	R229	*N2	R553	P4	R906	*L3	R1189	G4	R1285	G4	R1525	*D2	RB1502	*C5		
C104	*N5	C416	L5	C590	*N4	C815	*J2	C1223	*J5	C1318	*J4	C1614	*G2	CL828	J3	FB1209	*J4	R30	E3	R230	N2	R554	P4	R907	*K2	R1190	G4	R1286	H4	R1526	*D2	RB1503	*C5		
C105	N5	C417	L5	C591	*N4	C816	*J2	C1224	*J4	C1323	*J4	C1615	*G2	CL829	J3	FB1210	*J4	R31	E3	R301	*P2	R555	P4	R908	*L2	R1191	G4	R1287	H4	R1527	*D2	RB1504	C5		
C106	*N5	C418	L5	C592	*N4	C817	*J2	C1225	*J4	C1324	*H4	C1616	*G3	CL830	J3	FB1211	*G5	R32	*E3	R302	*N2	R556	P4	R909	*L2	R1192	G4	R1288	G4	R1528	*D2	RB1505	*C5		
C107	N5	C501	*N4	C593	*N4	C818	*J2	C1226	*J4	C1325	*H4	C1617	*G2	CL831	J3	FB1212	*J4	R34	E3	R303	*P2	R557	M4	R910	*K1	R1193	G4	R1289	H4	R1529	*D2	RB1506	*C5		
C108	*N5	C502	*M4	C594	*N4	C819	*J2	C1227	*J4	C1326	*H4	C1618	G5	CL832	J3	FB1213	*G4	R35	E3	R304	*L1	R558	M4	R911	*L1	R1194	G4	R1290	H4	R1530	*D2	RB1507	*C5		
C109	N5	C503	*M4	C595	*M4	C820	*K2	C1228	*J4	C1327	*H4			CL833	J3	FB1214	*J4	R36	*E4	R305	*L1	R559	P4	R912	*L1	R1195	G4	R1291	*J4	R1531	*D2	RB1508	C5		
C110	*N5	C504	*M4	C596	*M4	C821	*K2	C1229	*J4	C1328	*H4	CL21	*E3	CL834	J2	FB1215	G3	R37	*E3	R306	*L1	R560	P4	R1001	J5	R1196	G4	R1296	*G4	R1532	*D2	RB1509	C5		
C111	*M5	C505	*M4	C597	*M4	C822	*K2	C1230	*J4	C1329	*H4	CL100	P5	CL835	J3	FB1501	F2	R38	*E3	R307	*L2	R561	M4	R1002	J5	R1197	G5	R1297	*G4	R1533	D2	RB1510	C5		
C112	*M5	C506	*M4	C598	*M4	C823	*K2	C1231	*H4	C1330	*J4	CL101	P5	CL836	J2	FB1601	*G3	R39	*E3	R308	*L2	R562	M4	R1003	J5	R1198	G5	R1300	G4	R1534	D2	RB1511	C5		
C113	M5	C507	*M4	C599	*M4	C824	*K2	C1232	*H4	C1331	*G4	CL201	P1	CL837	J3			R40	*E4	R309	*L2	R563	P4	R1004	J5	R1199	G5	R1301	G4	R1535	D2	RB1512	C5		
C114	*M5	C508	*N4	C600	*M4	C825	*K2	C1233	*H4	C1332	*J4	CL202	P2	CL838	J3	IC21	*E3	R41	*E4	R310	*L3	R564	P4	R1005	J5	R1200	G5	R1302	*H4	R1536	D2	RB1513	*C5		
C115	M5	C509	*M4	C601	*N4	C826	*J2	C1234	*H4	C1333	*J5	CL203	P2	CL839	J1	IC22	C4	R42	E4	R311	*L3	R565	*N4	R1006	J5	R1201	*J5	R1303	G4	R1537	D2	RB1514	*C5		
C116	*M5	C510	*M4	C602	*N4	C827	*K2	C1235	*H4	C1334	*G4	CL204	P2	CL840	*J2	IC100	N4	R43	E4	R312	*L3	R566	P5	R1007	H5	R1202	*J5	R1401	L4	R1538	D2	RB1515	C5		
C117	M5	C511	*N4	C603	*N4	C828	*K2	C1236	*H4	C1335	*H4	CL205	*N2	CL841	J1	IC101	M2	R44	E4	R401	M1	R567	P5	R1008	H5	R1203	J4	R1402	L4	R1539	D2	RB1516	C5		
C118	*M5	C512	*M4	C604	*N5	C829	*K2	C1237	*H4	C1336	*H4	CL206	N2	CL842	J1	IC201	P2	R51	D4	R402	M1	R568	M5	R1009	H5	R1204	J4	R1403	L4	R1540	D2	RB1517	D5		
C119	M5	C513	*M4	C605	*N5	C830	*J2	C1238	*J4	C1337	*H4	CL207	N2	CL843	J1	IC300	P2	R52	D4	R403	M4	R569	*M4	R1010	H5	R1205	J4	R1404	L4	R1541	D2	RB1518	*F3		
C120	M5	C514	*N4	C606	*N4	C831	*J2	C1239	*H4	C1338	*G4	CL208	N2	CL844	J1	IC301	L1	R53	C4	R404	M4	R570	*M4	R1011	H5	R1206	*H4	R1405	G2	R1542	D2	RB1519	*G2		
C201	P2	C515	*N4	C607	*N4	C901	*H2	C1240	*G5	C1339	*G5	CL209	*N2	CL845	J1	IC302	L2	R54	C4	R405	M4	R571	*M4	R1012	H5	R1207	G4	R1406	G2	R1543	D2	RB1520	D5		
C202	P3	C516	*N4	C608	*N4	C902	*H2	C1241	*H4	C1340	*G5	CL210	N2	CL846	*J2	IC303	L3	R55	*E3	R406	M4	R572	*N4	R1101	G4	R1208	*H4	R1407	G2	R1544	D2	RB1521	C5		
C203	M3	C517	*M4	C609	*N4	C903	*H2	C1242	*H4	C1341	*J5	CL211	M1	CL847	J1	IC601	L5	R56	*D4	R409	L5	R573	P5	R1102	G4	R1209	H4	R1408	G2	R1545	D2	RB1522	C4		
C204	*N2	C518	*N4	C610	*N4	C904	*H2	C1243	*G5	C1342	*J4	CL212	P2	CL848	K1	IC700	H4	R57	E3	R410	L5	R574	P5	R1104	G5	R1210	H4	R1409	G2	R1546	D2	RB1523	E2		
C205	*N2	C519	*N4	C611	*N4	C905	*H2	C1244	*H4	C1343	*J4	CL213	*N2	CL1201	J5	IC701	*L5	R58	E3	R411	L5	R575	M5	R1105	G4	R1211	H4	R1410	G2	R1547	D2	RB1524	E2		
C206	*N2	C520	*M4	C612	*N4	C906	*H2	C1245	*H4	C1344	*G5	CL214	N1	CL1601	K4	IC702	J2	R59	E3	R412	*M5	R576	*M4	R1106	G4	R1212	H4	R1411	G2	R1548	D1	RB1525	E2		
C207	*M2	C521	*N4	C613	*N4	C907	*H2	C1246	*H5	C1345	*J4	CL215	N1	CL1602	K4	IC801	*K3	R101	N5	R413	L5	R577	*M4	R1107	G4	R1213	H4	R1412	G2	R1549	E2	RB1526	D2		
C208	*M2	C522	*N4	C614	*N4	C908	*H2	C1247	*H4	C1346	*G4	CL216	*N2			IC802	*J3	R102	N5	R414	*M5	R578	*M4	R1108	G4	R1214	H4	R1413	L4	R1550	D2	RB1527	D2		
C209	*M2	C523	*N4	C615	*N4	C909	*L2	C1248	*H4	C1347	*J4	CL217	*N2	CN4	M5	IC803	*J3	R103	*N5	R415	M4	R579	P5	R1109	G4	R1215	H4	R1414	F1	R1551	E1	RB1601	*K3		
C210	*N2	C524	*N4	C616	*N4	C910	*K3	C1249	*H5	C1349	*G4	CL218	N1	CN5	G5	IC804	*J1	R104	*N5	R416	*M5	R580	P5	R1110	G4	R1216	H4	R1415	F1	R1552	D2	RB1602	*N1		
C211	*M2	C525	*N4	C617	*N4	C911	*K3	C1250	*H4	C1351	*H4	CL219	N1	CN6	C5	IC900	H2	R105	N5	R417	*L5	R581	*M4	R1111	G4	R1217	J4	R1416	G1	R1553	D1	RB1603	*N1		
C212	*M2	C526	*N4	C618	*N4	C912	*L3	C1251	*H4	C1401	L4	CL220	*N2	CN101	L3	IC901	L3	R106	N5	R418	*L5	R701	*K5	R1112	G4	R1218	K4	R1417	*G2	R1554	D1	RB1604	*N1		
C213	*M2	C527	*N4	C619	*N4	C913	*L3	C1253	*H4	C1402	L4	CL221	N1	CN102	M1	IC902	L2	R107	*N5	R419	M4	R702	*L5	R1113	G4	R1219	J4	R1418	*F2	R1555	D2	RB1605	*N1		
C214	*M2	C528	*N4	C620	*N4	C914	*L3	C1254	*H4	C1403	L4	CL222	N1	CN300	C1	IC903	L1	R108	*N5	R420	M4	R703	*L5	R1114	G4	R1220	J4	R1419	*F2	R1556	D2	RB1606	*N1		
C215	*M2	C529	*N4	C621	*N4	C915	*L3	C1255	*H4	C1404	K4	CL223	N1			IC1101	*F4	R109	N5	R421	M4	R704	*L5	R1115	G4	R1221	J4	R1420	*F2	R1557	D2	RB1607	*N1		
C216	*M2	C530	*N4	C622	*N4	C916	*L2	C1256	*J5	C1405	G1	CL224	N1	D21	E3	IC1102	F5	R110	N5	R422	M3	R705	*L5	R1116	G4	R1222	H5	R1421	*G2	R1558	D1	RB1608	*N1		
C217	*M2	C531	*N4	C623	*N4	C917	*K2	C1257	*H4	C1406	G1	CL225	N1	D22	*D3	IC1202	*G4	R111	*N5	R423	M4	R706	*K5	R1117	G4	R1223	H5	R1422	*G2	R1559	D2	RB1609	*N1		
C218	*N2	C532	*N4	C624	*M4	C918	*K2	C1258	*H4	C1407	*G2	CL226	N1	D23	*D3	IC1401	F2	R112	*N5	R424	M4	R707	*K5	R1118	G4	R1224	H5	R1423	*F2	R1560	D2	RB1610	K4		
C219	*N2	C533	*N4	C625	*M4	C919	*L2	C1259	*H4	C1408	*F2	CL227	*N2	D24	E4	IC1402	F1	R113	N5	R425	M4	R708	J1	R1119	G4	R1225	H5	R1424	C1	R1561	D1	RB1611	E5		
C220	*N2	C534	*N4	C626	*M4	C920	*L2	C1260	*H4	C1409	*F2	CL228	N1	D401	M1	IC1403	C2	R114	N5	R426	M3	R709	J1	R1120	G4	R1226	H5	R1425	B1	R1562	*D2	RB1612	F5		
C221	*N2	C535	*N4	C627	*M4	C921	*L2	C1261	*H4	C1410	F2	CL229	N1	D402	M1	IC1404	C2	R115	*N5	R427	M4	R710	J4	R1121	G4	R1227	H5	R1426	C1	R1563	*D2				
C222	*N2	C536	*N4	C628	*M4	C922	*L2	C1262	*H4	C1411	*F2	CL230	*N2	D701	J1	IC1405	B1	R116	*N5	R428	M4	R711	J4	R1122	G4	R1228	H5	R1427	B1	R1564	*D2	S101	L4		
C223	*M2	C537	*N4	C629	*M4	C923	*L2	C1263	*J5	C1412	*G2	CL231	N1	D702	J1	IC1406	C1	R117	N5	R501	*N5	R712	K4	R1123	G4	R1229	H5	R1428	C1	R1565	*D2	S102	K5		
C224	*M2	C538	*M4	C630	*M4	C924	*L2	C1264	*H4	C1413	F2	CL232	*N2			IC1407	C1	R118	N5	R502	*N5	R713	J4	R1124	G4	R1230	G4	R1429	D5	R1566	*D2	S104	E2		
C225	*M2	C539	*N4	C631	*M4	C925	*K1	C1265	*H4	C1414	F2	CL233	*N2	E1	A1	IC1408	C1	R119	*N5	R503	*M5	R714	K4	R1125	G4	R1233	G4	R1430	C1	R1567	*D2				
C226	*N2	C540	*M4	C632	*M4	C926	*K2	C1266	*H4	C1415	G2	CL234	N1	E2	E1	IC1409	L4	R120	*N5	R504	*M5	R715	J3	R1126	G4	R1234	G4	R1431	D5	R1568	*D2	TP401	L4		
C227	*N2	C541	*M5	C633	*N4	C927	*L2	C1267	*H4	C1416	*G2	CL235	N1	E3	E5	IC1410	L4	R121	*M5	R505	M4	R716	J3	R1128	G4	R1235	H4	R1432	C1	R1569	D1	TP402	L4		
C228	*N2	C542	*N4	C634	*N5	C928	*L2	C1268	*H4	C1417	*G2	CL236	N1	E4	G1	IC1500	D2	R122	*N5	R506	M4	R717	J3	R1131	G5	R1236	H4	R1433	D5	R1570	E2	TP403	L4		

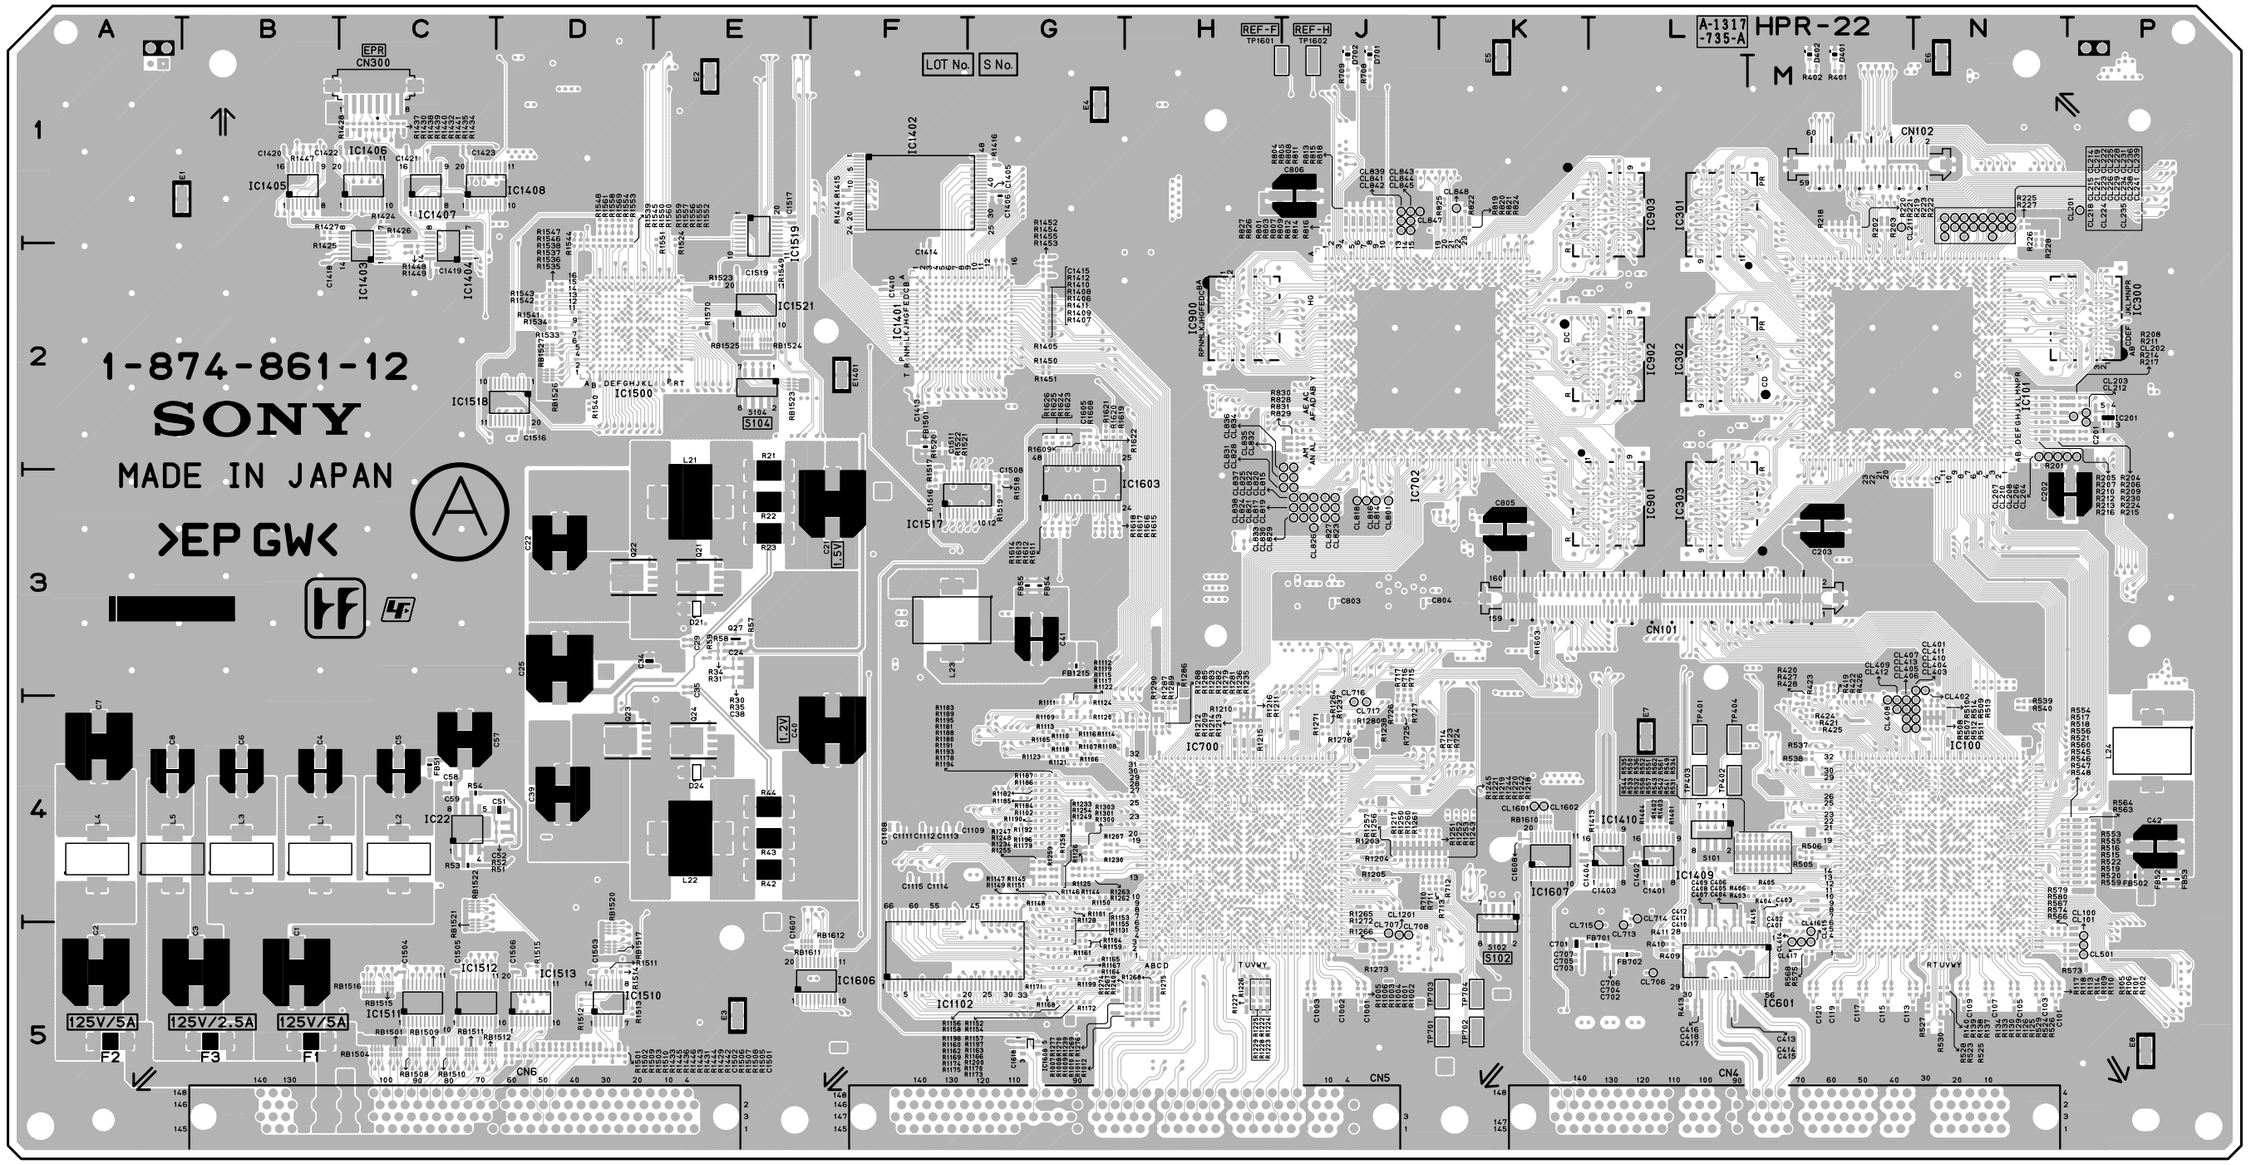

HPR-22 -A SIDE-
SUFFIX: -12

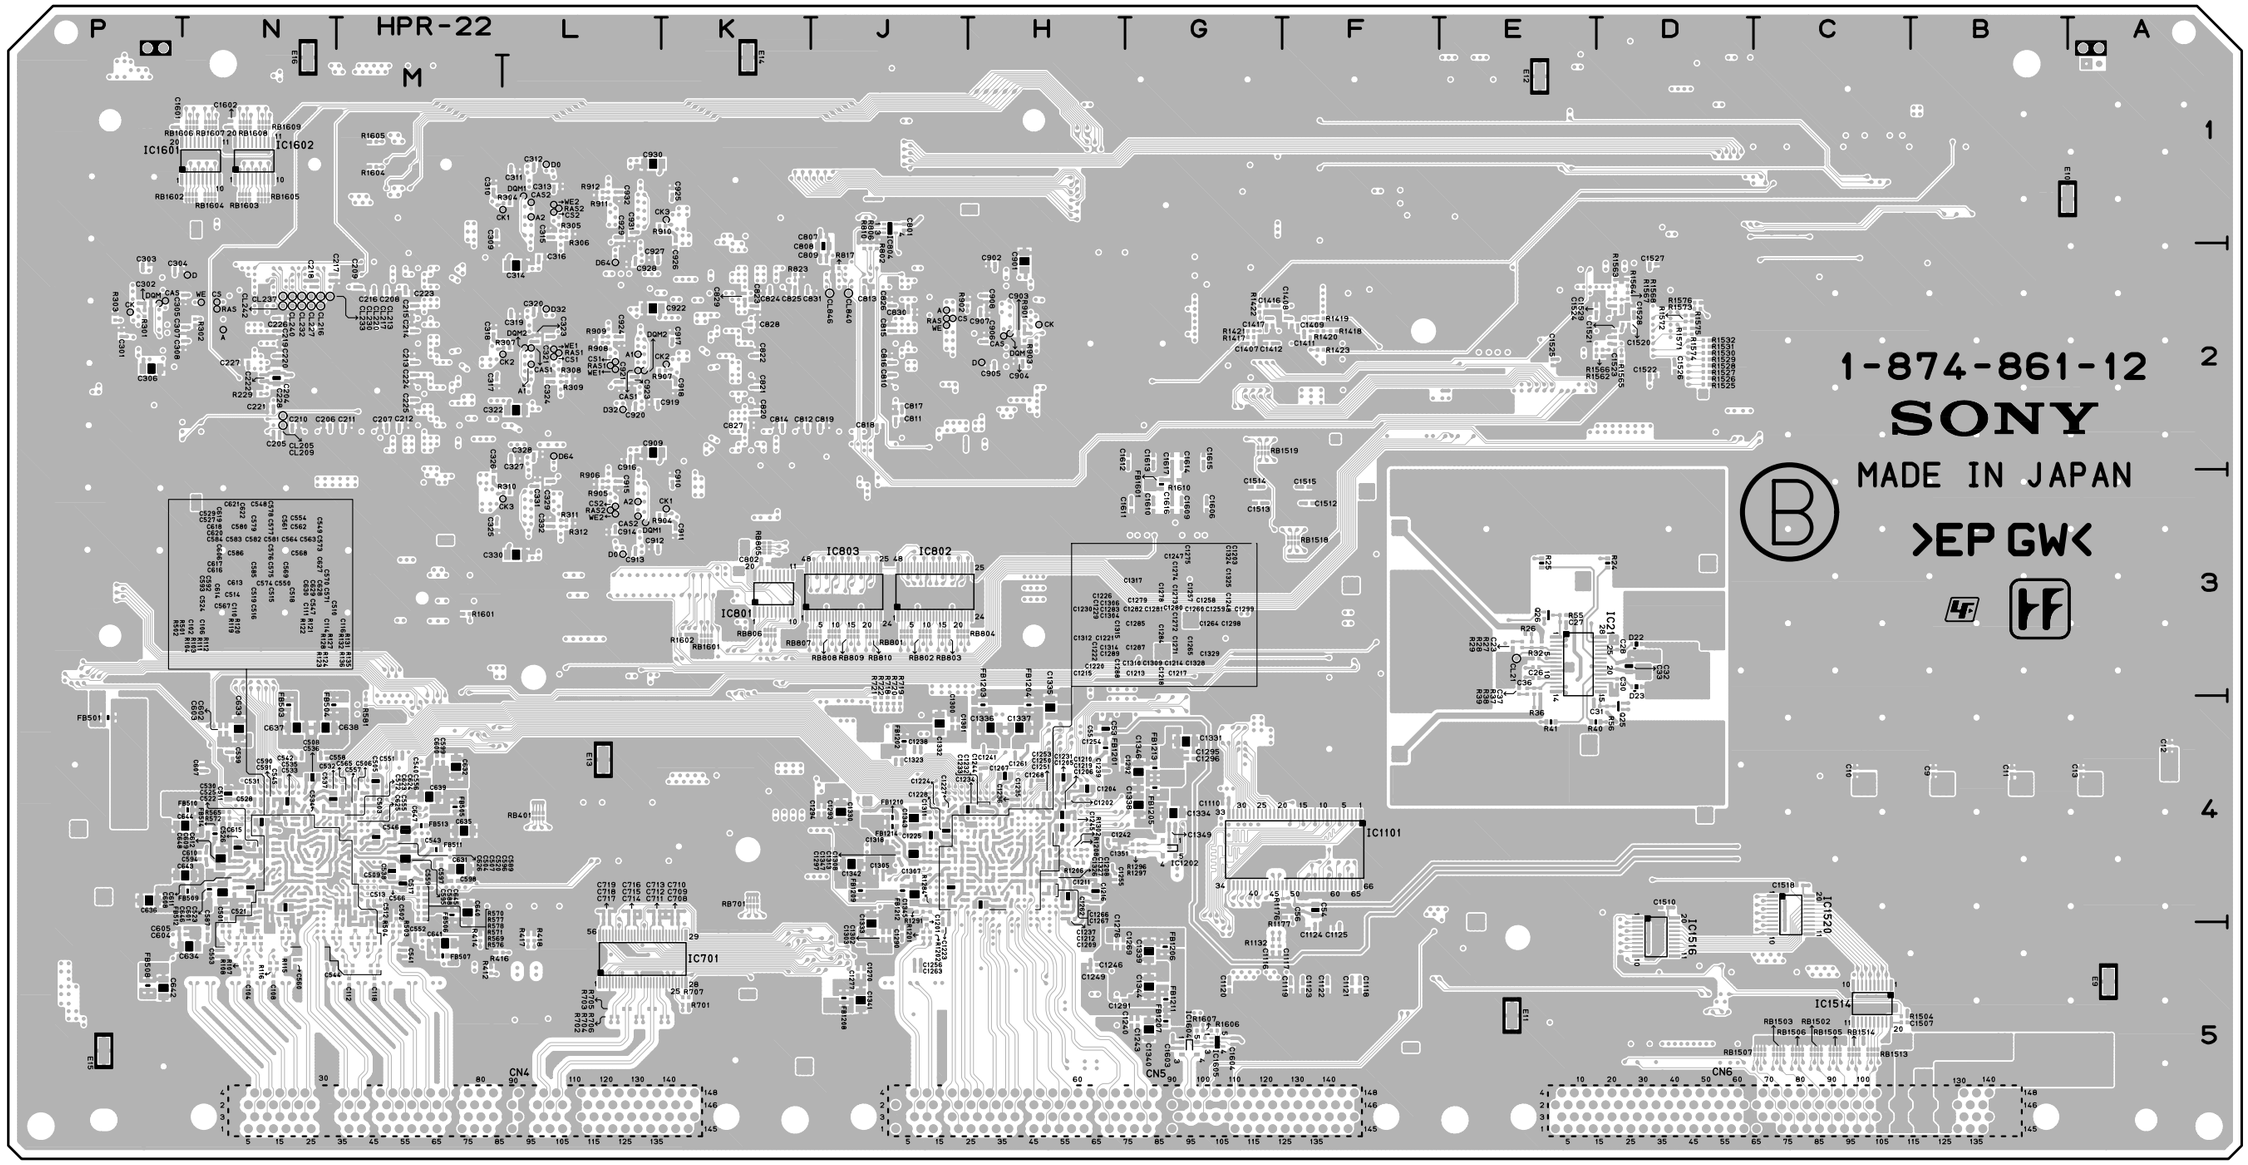

HPR-22 -B SIDE-
SUFFIX: -12

HPR-35 (1-881-890-11)

C1	C7	C412	*N2	C511	*N2	C670	*M4	C930	*M6	C1049	*N6	C1453	*J6	C1704	*H4	C1885	*H4	C2144	*H2	C2422	*L2	C3124	*D3	CL406	N3	CL3201	K5	FB2103	*J2	Q45	G1	R300	M2	R957	*N6
C2	B7	C413	*N2	C512	*N2	C671	*M4	C931	*N6	C1050	*N6	C1456	*J5	C1705	*H4	C1886	*H4	C2145	*H2	C2423	*L2	C3125	*E3	CL550	M4	CL3202	K5	FB2104	*H2			R301	M2	R1200	G6
C3	C6	C414	*N2	C513	*N2	C672	*M4	C933	*N6	C1052	*N6	C1457	*H6	C1706	*H4	C1887	*J4	C2146	*H2	C2424	L1	C3126	*D3	CL551	M4			FB2400	*L3	R1	B5	R302	M2	R1201	G6
C4	C6	C415	*N2	C514	*N2	C673	*M4	C934	*N5	C1053	*N6	C1458	*J7	C1707	*H4	C1888	*J4	C2147	*H2	C2425	*L2	C3127	*D3	CL552	*M5	CN1	K1	FB2401	L1	R2	B5	R303	M2	R1202	*F7
C5	A7	C416	*N2	C515	*N2	C674	*M4	C935	*M7	C1054	*N6	C1459	*H6	C1708	*H4	C1889	*J4	C2148	*H2	C2426	*L2	C3128	*D3	CL553	*M4	CN4	M7	FB3100	*E6	R3	B5	R304	N2	R1203	G7
C6	*C6	C417	*N2	C516	*N2	C675	*M4	C936	*N7	C1055	*N6	C1460	*J6	C1709	*J3	C1890	*J4	C2149	*H2	C2427	*L2	C3129	*D3	CL554	*M4	CN5	H7	FB3120	*E6	R4	B5	R305	N2	R1204	G7
C7	*C6	C418	*N2	C517	*N2	C676	*M4	C937	*M6	C1057	*N6	C1461	*H6	C1710	*J3	C1891	*J4	C2150	*H2	C2428	*L2	C3130	*E6	CL555	N4	CN6	C7	FB3200	*F4	R5	*F5	R306	N2	R1205	G6
C8	F5	C419	*N2	C518	*N2	C677	*N4	C938	*N5	C1059	*N6	C1462	*H6	C1711	*J3	C1892	*J4	C2151	*H2	C2429	*L2	C3131	*E6	CL556	*M5	CN101	D1			R6	*B5	R307	N2	R1206	G6
C9	G5	C420	*N2	C519	*M2	C678	*M4	C939	*M7	C1070	L6	C1463	*J6	C1712	*J3	C1893	*J4	C2152	*H2	C2430	*L2	C3132	*E6	CL557	*M5	CN102	C4	IC1	G5	R7	*B5	R308	M2	R1207	G6
C10	*G5	C421	*N2	C520	*M2	C679	*M4	C940	*P7	C1071	*M6	C1464	*H6	C1713	*J3	C1894	*J4	C2153	*H2	C2431	*L2	C3190	*E6	CL558	M4	CN300	C1	IC2	F5	R8	B5	R309	M2	R1208	G6
C11	B5	C422	*N2	C521	*N2	C680	*M4	C941	*M6	C1072	*N6	C1465	*H6	C1714	*J3	C1895	*J4	C2154	*J2	C2432	*L2	C3191	*E6	CL559	M4			IC3	*B5	R9	B5	R400	N2	R1209	G6
C12	E5	C423	*N2	C550	*M4	C681	*M4	C943	*N5	C1073	*N6	C1466	*J6	C1715	*J3	C1896	*J4	C2155	*J2	C2433	*L2	C3194	D6	CL600	N5	D1	B5	IC4	L4	R10	*B5	R401	N2	R1210	G6
C13	*F5	C424	*N2	C551	*N4	C682	*N4	C944	*M6	C1200	*F7	C1467	*H6	C1716	*J3	C1897	*J4	C2156	*J2	C2434	*L2	C3195	*D7	CL601	N5	D2	*F5	IC50	F1	R11	*B5	R402	N2	R1211	G6
C14	A5	C425	*N2	C552	*M4	C683	*N4	C945	*N6	C1201	*F7	C1468	*H5	C1717	*J3	C1898	*J4	C2157	*J2	C2435	*L2	C3200	*G7	CL602	N5	D3	*A5	IC65	K4	R12	B5	R403	N2	R1212	G6
C15	*F5	C426	*N2	C553	*M4	C684	*N4	C946	*M6	C1202	*F7	C1469	*H7	C1800	*H4	C1899	*J4	C2158	*J2	C2436	*L2	C3201	K6	CL603	N5	D4	*A6	IC100	N6	R13	*F5	R404	N2	R1213	G6
C16	*F5	C427	*N2	C554	*M4	C685	*N4	C949	*N5	C1203	*F7	C1470	*J5	C1801	*H5	C1900	*J4	C2159	*J2	C2437	*L2	C3202	F4	CL604	N4	D5	B6	IC101	N2	R14	*F5	R405	N2	R1214	G6
C17	*B5	C428	*N2	C555	*M5	C686	*M4	C950	*M6	C1204	*F7	C1471	*H6	C1802	*H4	C1901	*J4	C2160	*J2	C2438	*L2	C3203	*F4	CL605	N5	D110	M1	IC102	N4	R15	*B5	R550	M4	R1215	G6
C18	*F5	C429	*N2	C556	*M5	C687	*N4	C951	*N6	C1205	*G7	C1472	*J6	C1803	*H4	C1902	*J4	C2161	*J2	C2439	*K2	C3204	*F4	CL606	N5	D111	M3	IC103	H6	R16	*F5	R551	M4	R1216	G6
C19	*B5	C430	*N2	C557	*M5	C688	*N4	C952	*N6	C1206	*F7	C1473	*H5	C1804	*H4	C1903	*J4	C2162	*J2	C2440	*L2	C3205	*F4	CL1300	*L7	D401	N1	IC104	J4	R17	*F5	R552	M4	R1217	G6
C20	A5	C431	*N2	C558	*M5	C689	*N4	C953	*N6	C1207	*F7	C1474	*H7	C1805	*H4	C1904	*J4	C2163	*J2	C2441	*L2	C3206	*F4	CL1301	L7	D402	N1	IC105	H2	R18	*F5	R553	M4	R1218	G6
C21	*B5	C432	*N2	C559	*M4	C690	*N4	C954	*N5	C1208	*F7	C1475	*J5	C1806	*H4	C1905	*J4	C2164	*J2	C2442	*L2	C3207	*F4	CL1302	J7	D701	J1	IC110	D5	R19	*B5	R554	M4	R1219	G6
C22	*B5	C433	*N2	C560	*M4	C691	*N4	C955	*M7	C1209	*F7	C1476	*H6	C1807	*H4	C1906	*J4	C2165	*J2	C2443	*L2	C3208	*F4	CL1600	H3	D702	J1	IC120	E4	R20	*B5	R555	M4	R1220	G6
C23	*B5	C434	*N2	C561	*M4	C692	*N4	C956	*P7	C1210	F6	C1477	*H6	C1808	*H4	C1907	*J4	C2166	*J2	C2444	*L2	C3209	*F4	CL1601	*J4	D1601	J3	IC300	M3	R21	*B6	R556	N4	R1221	G6
C24	B5	C435	*N2	C562	*M4	C693	*N4	C957	*N6	C1211	F6	C1478	*H5	C1809	*J4	C1908	*J4	C2167	*J2	C2445	*L2	C3210	*F4	CL1602	H3	D1602	J3	IC301	M2	R22	*B6	R557	M4	R1222	G6
C25	F5	C436	*N2	C563	*M3	C694	*N4	C958	*N6	C1212	F6	C1479	*H7	C1810	*J4	C1909	*J4	C2168	*J2	C2447	*L3	C3211	*F4	CL1603	J4	D2300	M1	IC400	N3	R23	*B6	R558	M4	R1223	G6
C26	*B6	C437	*M2	C564	*M4	C695	*N4	C959	*N6	C1213	F6	C1480	*J6	C1811	*J4	C1910	*J4	C2169	*J2	C2448	*K2	C3212	*F4	CL1605	H2			IC550	M4	R24	*B6	R559	M4	R1224	G6
C27	*B6	C438	*N2	C565	*M4	C696	*N4	C960	*N6	C1214	F6	C1481	*H6	C1812	*J4	C1911	*J4	C2170	*J2	C2449	*L2	C3213	*G7	CL1606	J5	E1	A7	IC551	M4	R25	*B6	R600	N4	R1225	G7
C28	*A5	C439	*N2	C566	*M4	C697	*N4	C961	*N6	C1215	*G6	C1482	*J6	C1813	*J4	C1912	*J4	C2171	*J2	C2450	*L2	C3214	*F7	CL1607	J4	E2	K7	IC600	N4	R26	*B6	R601	N4	R1226	G7
C29	*A5	C440	*N2	C567	*M4	C698	*N4	C962	*N6	C1216	F6	C1483	*H6	C1814	*J4	C1913	*J4	C2172	*J2	C2451	*L2	C3215	E7	CL1608	J4	E3	P7	IC804	L7	R27	*B6	R602	N4	R1227	G6
C30	B5	C441	*N2	C600	*N4	C699	*N4	C963	*N6	C1217	F6	C1484	*H5	C1815	*J4	C1914	*J4	C2173	*J2	C2452	*K2	C3216	F4	CL1609	J4	E4	B1	IC1202	*F6	R28	*B6	R603	N4	R1228	G7
C31	B6	C442	*N2	C601	*N4	C700	*N4	C964	*N6	C1300	K7	C1485	*H7	C1816	*J4	C1915	*J4	C2174	*J2	C2453	*L2	C3217	F4	CL1610	*J4	E5	H1	IC1203	F7	R29	B7	R604	N4	R1229	G6
C32	*B6	C443	*N2	C602	*N4	C701	*N4	C966	*M5	C1301	L7	C1486	*J6	C1817	*J4	C1916	*J4	C2175	*J2	C2454	*L2	C3218	F4	CL1612	J4	E6	P1	IC1300	*L7	R30	B6	R605	N4	R1230	G6
C33	*B6	C444	*N2	C603	*N4	C702	*N4	C967	*M7	C1302	K7	C1487	*H6	C1818	*J4	C1917	*H4	C2176	*J2	C2455	*L2	C3219	F4	CL1613	*J4	E7	F5	IC1400	*G6	R31	B6	R802	L6	R1231	G6
C34	*B6	C445	*N2	C604	*N4	C703	*N4	C968	*N5	C1303	L7	C1488	*H6	C1819	*J4	C1918	*H4	C2177	*H2	C2456	*L2	C3244	F5	CL1614	J4	E8	*A7	IC1700	H4	R32	*L4	R803	*L7	R1232	G6
C35	A6	C446	*N2	C605	*N5	C704	*N4	C969	*N6	C1304	K7	C1489	*H6	C1820	*J4	C1919	*J4	C2178	*J2	C2460	*K2	C3245	E7	CL1615	*J4	E9	*K7	IC1701	J3	R33	*L4	R804	*L7	R1233	G6
C36	B6	C447	*N2	C606	*N5	C705	*N4	C970	*N6	C1305	L7	C1490	*H5	C1821	*J4	C1920	*J4	C2179	*J2	C2462	*L1	C3246	*E7	CL1616	*J4	E10	*P7	IC1800	H4	R34	*L4	R805	*L7	R1234	G6
C39	L4	C448	*N2	C607	*N5	C706	*N4	C971	*M5	C1306	K7	C1491	*H7	C1822	*J4	C1921	*J4	C2180	*J2	C2463	*L1			CL1617	*J4	E11	*B1	IC2000	J2	R50	F1	R806	*L7	R1235	G6
C41	L4	C449	*N2	C608	*N5	C707	*N4	C972	*M7	C1307	*K6	C1492	*J6	C1823	*J4	C2000	*J2	C2181	*J2	C2480	L1	CL1	B5	CL1618	*J4	E12	*H1	IC2001	J2	R51	*F1	R807	*L7	R1236	G6
C42	L4	C450	*N2	C609	*N4	C708	*N4	C973	*P5	C1308	*K6	C1493	*H6	C1824	*J4	C2001	*H2	C2182	*H2	C2481	*L3	CL2	*D7	CL1619	*J4	E13	*P1	IC2100	H2	R52	*F1	R808	*L7	R1237	G6
C43	L4	C451	*N2	C610	*N4	C709	*N4	C974	*N6	C1309	*K6	C1494	*H6	C1825	*J4	C2002	*J2	C2183	*H2	C2482	*L2	CL3	*D7	CL1620	*J4	E14	*F5	IC2300	L2	R53	*F1	R809	L6	R1238	G6
C44	L4	C452	*N2	C611	*N4	C710	*N4	C975	*N6	C1310	*K6	C1495	*H6	C1826	*J4	C2003	*J2	C2184	*H2	C2483	*L3	CL4	F7	CL1621	J3			IC2401	K1	R54	*F1	R810	L7	R1239	G6
C50	*F1	C453	*N2	C612	*N4	C711	*M4	C976	*N5	C1311	*K6	C1496	*H6	C1827	*J4	C2004	*J2	C2185	*H2	C2484	*L2	CL5	F7	CL1623	*J3	F1	C7	IC3000	F3	R55	*F1	R811	L7	R1240	G6
C51	*F1	C454	*N2	C613	*N4	C712	*M4	C977	*N7	C1312	*K6	C1497	*H6	C1828	*J4	C2005	*J1	C2186	*J2	C2485	*L2	CL6	G7	CL1624	*J3	F2	B7	IC3002	K6	R56	*F1	R900	M7	R1241	G6
C52	F2	C455	*N2	C614	*N4	C713	*M4	C978	*N6	C1313	*L6	C1498	*H6	C1829	*J4	C2006	*J1	C2187	*H2	C2486	*L2	CL7	G7	CL1625	J3			IC3004	F2	R57	*F1	R901	M7	R1242	G6
C53	G2	C456	*N2	C615	*N4	C714	*M4	C979	*M6	C1314	*L6	C1499	*G5	C1830	*J4	C2007	*J1	C2188	*H2	C2490	*L2	CL8	G7	CL1626	*J3	FB100	D4	IC3006	C1	R59	*F1	R902	*N7	R1243	G6
C54	F1	C457	*N2	C616	*N4	C715	*M4	C980	*N6	C1315	*L6	C1500	*H7	C1831	*J4	C2008	*J1	C2189	*H2	C2491	*L2	CL9	G7	CL1627	J3	FB101	E4	IC3007	C1	R60	*F1	R903	*N7	R1244	G6
C55	F1	C458	*N2	C617	*N4	C716	*M4	C982	*N5	C1316	*L6	C1501	*H6	C1832	*J4	C2009	*J2	C2190	*H2	C2492	*L2	CL10	G7	CL1628	*J3	FB300	*N3	IC3008	C2	R63	*F1	R904	M5	R1245	G6
C56	*F1	C459	*N2	C618	*N4	C717	*M4	C983	*N7	C1317	*L6	C1502	*J6	C1833	*J4	C2010	*J2	C2191	*H2	C2496	*L1	CL100	N3	CL1629	*J3	FB400	*N2	IC3009	B2	R65	L4	R905	M6	R1246	G6
C57	E1	C460	*N2	C619	*N4	C718	*M4	C984	*N6	C1318	*L6	C1503	*H6	C1834	*J4	C2011	*J2	C2192	*H2	C2497	*K2	CL101	N2	CL1630	*J3	FB401	*N2	IC3010	B1	R66	L4	R906	M6	R1247	G6
C58	*F1	C461	*N2	C620	*N4	C719	*M4	C985	*M6	C1400	*G6	C1504	*G5	C1835	*J4	C2012	*J2	C2193	*H2	C2498	*L2	CL102	N3	CL1631	*J3	FB402	*N2	IC3011	C2	R67	*L4	R907	N5	R1248	G6
C59	E1	C462	*N2	C621	*N4	C720	*M4	C986	*N6	C1401	*G6	C1505	*H7	C1836	*J4	C2013	*J3	C2194	*H2	C2499	*K2	CL103	N2	CL1632	*J3	FB403	*N2	IC3012	L6	R68	*L4	R908	N5	R1249	G6
C60	*F1	C463	*N2	C622	*N4	C721	*N4	C987	*N6	C1402	J5	C1506	*H6	C1837	*J4	C2014	*J3	C2195	*H2	C2500	K1	CL105	N4	CL1633	*J3	FB404	*N2	IC3100	D7	R69	*L4	R909	N5	R1250	G7
C65	L4	C464	*N2	C623	*N4	C800	M6	C988	*N5	C1403	J7	C1507	*J6	C1838	*J4	C2015	*J2	C2196	*H2	C3002	K6	CL106	N2	CL1634	*J4	FB550	*N4	IC3101	D7	R70	*L4	R910	N5	R1251	*F6
C66	L4	C465	*N2	C624	*N4	C801	M6	C989	*M7	C1404	*J6	C1508	*J6	C1839	*J4	C2016	*J2	C2197	*H2	C3003	L6	CL107	N2	CL1635	H2	FB600	*N4	IC3102	D7	R71	*L4	R911	P6	R1252	G7
C67	K4	C466	*N2	C625	*N4	C802	M6	C990	*P5	C1405	*J6	C1509	*H6	C1840	*J4	C2017	*J2	C2198	*H2	C3004	G2	CL108	N2	CL1636	J4	FB601	*N4	IC3103	*C7	R72	*L4	R912	P6	R1253	G7
C68	K4	C467	*N2	C626	*N4	C803	L6	C991	*M6	C1406	*H6	C1510	*H7	C1841	*J4	C2100	*H2	C2199	*H2	C3005	G2	CL109	N2	CL1637	J4	FB602	*M4	IC3104	*D6	R73	*L4	R913	P6	R1254	G7
C69	L4	C468	*N2	C627	*N4	C804	L6	C992	*M6	C1407	*H6	C1511	*H6	C1842	*J4	C2101	*H2	C2200	*H2	C3006	G2	CL110	M1	CL1638	J4	FB603	*M4	IC3106	E2	R74	*L4	R914	P6	R1255	G7
C70	L3	C469	*N2	C628	*N4	C805	L6	C993	*M6	C1408	*J6	C1512	*J6	C1843	*J4	C2102	*H2	C2201	*H2	C3007	*F3	CL112	M1	CL1700	H3	FB604	*N4	IC3107	*D6	R75	*L4	R915	P6	R1256	G7
C71	*L4	C470	*N2	C629	*N4	C806	L6	C994	*M6	C1409	*J6	C1513	*J6	C1844	*J4	C2103	*H2	C2202	*H2	C3008	*F3	CL113	M1	CL1701	J3	FB900	*N6	IC3108	E6	R102	*N6	R916	P6	R1257	G7
C72	L3	C471	*N2	C630	*N4	C807	L6	C995	*M6	C1410	*H7	C1514	*H6	C1845	*J4	C2104	*H2	C2203	*J2	C3009	F3	CL114	M1	CL1702	*H4	FB901	*N6	IC3109	E6	R103	*N6	R917	P6	R1258	G7
C73	*L4	C472	*N2	C631	*N4	C808	L6	C997	*M6	C1411	*H6	C1515	*H7	C1846	*J4	C2105	*H1	C2204	*H2	C3010	*F3	CL115	M1	CL1703	*H4	FB902	*N5	IC3110	D3	R104	N4	R918	P6	R1259	G7
C74	*L3	C473	*N2	C632	*N4	C809	L6	C998	*N7	C1412	*H7	C1516	*J6	C1847	*J4	C2106	*H1	C2205	*H2	C3011	*F3	CL116	M1	CL1704	*H4	FB903	*N5	IC3111	E3	R105	N2	R919	*N7	R1260	G7
C75	*L4	C474	*N2	C633	*M4	C810	L6	C999	*N6	C1413	*H6	C1517	*H6	C1848	*J4	C2107	*H1	C2206	*H2	C3012	F3	CL117	N1	CL1705	H4	FB904	*M6	IC3113	D2	R106	N1	R920	*N7	R1261	G7
C100	D5	C475	*M2	C634	*M4	C811	L6	C1000	*N6	C1414	*J6	C1518	*G5	C1849	*J4	C2108	*H1	C2207	*H2	C3013	F2	CL118	M1	CL1706	*H4	FB905	*M7	IC3120	E7	R107	M1	R921	N7	R1262	G7
C101	D5	C476	*M2	C635	*M4	C812	L7	C1001	*N6	C1415	*J6	C1519	*J7	C1850	*J4	C2109	*H2	C2208	*H2	C3014	G3	CL119	M1	CL1707	*H4	FB906	*M7	IC3133	E6	R108	M1	R922	M7	R1263	G7
C102	D5	C477	*N2	C636	*M4	C813	L7	C1002	*M6	C1416	*H6	C1520	*H6	C1851	*J4	C2110	*H2	C2209	*H2	C3015	*F3	CL120	M1	CL1708	J4	FB907	*N7	IC3134	D6	R109	M2	R923	*N7	R1264	G7
C103	E4	C478	*N2	C637	*M4	C814	L7	C1003	*N7	C1417	*H6	C1521	*H6	C1852	*J4	C2111	*H2	C2210	*H2	C3016	*F3	CL121	N3	CL1709	J3	FB908	*P7	IC3135	*D7	R110	M1	R924	*M7	R1265	G7
C104	E4	C479	*N2	C638	*M4	C815	L7	C1004	*N6	C1418	*J6	C1523	*H6	C1853	*J4	C2112	*H2	C2211	*J2	C3017	C2	CL123	M4	CL1800	H5	FB909	*P5	IC3200	K6	R111	N1	R925	M6	R1266	G7
C106	E4	C480	*N2	C639	*N4	C816	L7	C1005	*N6	C1419	*J6	C1525	*H6	C1854	*J4	C2113	*H2	C2212	*J2	C3018	B1	CL125	M3	CL1801	H5	FB910	*M6	IC3201	F4	R112	N2	R926	M6	R1267	G7
C300	*N3	C481	*N2	C640	*N4	C817	L7	C1006	*N6	C1420	*H6	C1527	*J6	C1855	*J4	C2114	*H2	C2213	*J2	C3019	C1	CL126	M3	CL1802	H5	FB911	*N6	IC3202	*E7	R114	M1	R927	M6	R1268	G6
C301	*N3	C482	*N2	C641	*N4	C900	M7	C1007	*M6	C1421	*H6	C1529	*H6	C1856	*J4	C2115	*H2	C2214	*J2	C3020	B1	CL127	M3	CL1803	H5	FB912	*M6	IC3203	E7	R115	M1	R928	L6	R1269	G6
C302	*N3	C483	*N2	C642	*N4	C901	*N7	C1008	*N7	C1422	*H6	C1531	*H6	C1857	*J4	C2116	*H2	C2215	*J2	C3021	C2	CL128	M3	CL1804	H5	FB913	*N6	IC3204	G4	R116	M1	R929	L6	R1270	G6
C303	*M3	C484	*N2	C643	*N4	C902	*N6	C1009	*N6	C1423	*H6	C1545	*H6	C1858	*J4	C2117	*H2	C2216	*J2	C3022	B2	CL129	M3	CL1805	H5	FB1300	K7	IC3205	G4	R117	M1	R930	P5	R1271	G6
C304	*M3	C485	*N2	C644	*N4	C903	*N6	C1010	*N6	C1424	*H6	C1546	*H6	C1859	*J4	C2118	*H2	C2217	*J2	C3023	K6	CL130	M3	CL1806	H5	FB1301	L7	IC3206	G4	R118	M3	R931	P5	R1272	G6
C305	*M3	C486	*N2	C645	*N4	C904	*M6	C1011	*N6	C1425	*H6	C1547	*H6	C1860	*J4	C2119	*H2	C2218	*J2	C3024	L6	CL131	M3	CL2000	J2	FB1400	*H6	IC3207	G4	R119	M3	R932	N7	R1273	G6
C306	*M3	C487	*N2	C646	*N4	C905	*M6	C1012	*M6	C1426	*H6	C1548	*H6	C1861	*J4	C2120	*H2	C2219	*J2	C3100	E7	CL132	M3	CL2001	J2	FB1401	*H6	IC3208	*G7	R120	M3	R933	N7	R1274	G6
C307	*N3	C488	*N2	C647	*N4	C906	*N6	C1013	*N7	C1427	*H6	C1549	*H6	C1862	*J4	C2121	*H2	C2220	*J2	C3101	E7	CL133	M3	CL2002	*J1	FB1402	*H6	IC3217	*G7	R121	M3	R934	M6	R1275	G6
C308	*N3	C489	*N2	C648	*N4	C907	*N6	C1014	*N6	C1428	*H6	C1550	*H6	C1863	*J4	C2122	*J2	C2221	*H2	C3102	C7	CL134	N1	CL2003	*J2	FB1403	*J5	IC3219	F5	R122	M3	R935	M6	R1276	G6
C309	*M2	C490	*N2	C649	*N4	C908	*M7	C1015	*N6	C1429	*H6	C1551	*H6	C1864	*J4	C2123	*J2	C2400	*L2	C3103	D7	CL138	M3	CL2004	*J2	FB1404	*H5			R123	M3	R936	P6	R1277	G6
C310	*M2	C491	*N2	C650	*N4	C909	*M7	C1016	*M6	C1430	*J6	C1553	*H6	C1865	*J4	C2124	*J2	C2401	*L2	C3104	D7	CL139	N1	CL2005	J2	FB1405	*G5	L1	C6	R124	M3	R937	P6	R1278	G6
C311	*M2	C492	*N2	C651	*N4	C910	*N7	C1017	*N7	C1431	*H6	C1554	*J6	C1866	*J4	C2125	*J2	C2402	*L2	C3105	*C7	CL140	N2	CL2006	*J1	FB1406	*G7	L2	C6	R126	M3	R938	M6	R1279	G6
C312	*M2	C493	*N2	C652	*N4	C911	*N7	C1018	*N6	C1432	*H6	C1555	*J6	C1867	*J4	C2126	*H2	C2403	*L2	C3106	E7	CL142	N4	CL2007	*J1	FB1407	*G7	L3	A7	R127	M3	R939	M6	R1280	G6
C313	*M2	C494	*N2	C653	*N4	C912	*N7	C1020	*N6	C1433	*J6	C1556	*J6	C1868	*J4	C2127	*H2	C2404	*L2	C3107	*D6	CL143	N2	CL2008	J3	FB1408	*J7	L4	B5	R128	M3	R940	P6	R1281	G7
C314	*M2	C495	*N2	C654	*N4	C913	*N7	C1021	*N6	C1434	*H6	C1557	*J6	C1869	*J4	C2128	*H2	C2405	*L2	C3108	E6	CL300	M3	CL2009	J2	FB1409	*J7	L5	F5	R129	M3	R941	P6	R1282	G7
C315	*M2	C496	*N2	C655	*N4	C914	*M6	C1022	*M6	C1435	*H6	C1558	*J6	C1870	*J4	C2129	*H2	C2406	*L2	C3109	*E6	CL301	M2	CL2100	H1	FB1410	*J6	L6	B6	R130	N4	R942	*N7	R1283	G7
C316	*M2	C497	*N2	C656	*N4	C915	*M6	C1023	*N6	C1436	*J5	C1559	*J6	C1871	*J4	C2130	*H2	C2407	*L2	C3110	*E6	CL302	*M3	CL2101	H2	FB1411	*H6	L7	L4	R132	M1	R943	*N6	R1284	*F6
C317	*M2	C498	*N2	C657	*M4	C916	*N6	C1024	*N6	C1437	*H7	C1560	*J6	C1872	*J4	C2131	*H2	C2408	*L2	C3111	*E6	CL303	*N3	CL2102	H1	FB1412	*J6	L50	F1	R133	M3	R944	M6	R1300	*K7
C400	*N3	C499	*N2	C658	*M4	C917	*N6	C1025	*N6	C1438	*J7	C1561	*J6	C1873	*J4	C2132	*H2	C2409	*L2	C3112	E2	CL304	*M3	CL2103	H2	FB1413	*H6	L65	K3	R134	M3	R945	*N7	R1301	*L7
C401	*N3	C500	*N2	C659	*M4	C918	*M6	C1026	*N6	C1439	*H6	C1570	G5	C1874	*J4	C2133	*J2	C2410	*L2	C3113	*E6	CL305	N2	CL2104	H2	FB1414	*J6			R135	M1	R946	M7	R1302	*L7
C402	*N3	C501	*N2	C660	*M4	C919	*N6	C1027	*M6	C1440	*J5	C1571	*H6	C1875	*J4	C2134	*J2	C2411	*L2	C3114	*E6	CL306	*N3	CL2105	H2	FB1700	*H5	Q1	B5	R136	N2	R947	N5	R1303	*L7
C403	*N3	C502	*N2	C661	*M4	C920	*N6	C1028	*M6	C1441	*G7	C1572	*H6	C1876	*H4	C2135	*J2	C2412	*L2	C3115	*D6	CL307	*M3	CL2106	H1	FB1800	*J4	Q2	A5	R144	N2	R948	*N7	R1304	*K7
C404	*N3	C503	*N2	C662	*M4	C921	*N6	C1029	*M6	C1442	*J7	C1573	*J6	C1877	*H4	C2136	*J2	C2413	*L2	C3116	E7	CL308	M2	CL2304	K2	FB1801	*J4	Q3	B5	R145	N4	R949	M7	R1305	*K7
C405	*N3	C504	*N2	C663	*M4	C922	*N6	C1042	*M6	C1443	*H6	C1574	*J6	C1878	*J4	C2137	*J2	C2415	*K3	C3117	E6	CL309	M2	CL2305	K2	FB1802	*J4	Q4	*B5	R146	E4	R950	M5	R1306	*K7
C406	*N3	C505	*N2	C664	*M4	C

R1404	*G6	R1805	H4	R3040	E7	R3199	E6	RB3141	D4
R1405	*G6	R2000	J2	R3041	C1	R3200	E2	RB3142	D6
R1406	J6	R2001	J2	R3042	E7	R3201	F5	RB3143	E6
R1407	J6	R2002	J2	R3043	C1	R3202	F4	RB3144	D6
R1408	J6	R2003	J2	R3044	C1	R3203	F4	RB3145	D6
R1409	H5	R2004	J2	R3045	C1	R3204	*F4	RB3146	*D7
R1410	H5	R2005	J2	R3046	C1	R3205	F5	RB3200	E2
R1411	H5	R2006	H2	R3047	C1	R3206	F5	RB3201	K6
R1412	H5	R2007	J2	R3048	E7	R3207	F5	RB3202	*E7
R1413	J6	R2008	J2	R3049	E7	R3208	F5	RB3203	E7
R1414	J6	R2009	J2	R3050	E7	R3209	*F4	RB3204	E7
R1415	J6	R2100	H2	R3051	E7	R3210	*F4	RB3205	E2
R1417	H7	R2101	H2	R3052	E7	R3211	F4	RB3206	C4
R1418	H7	R2102	H2	R3053	*B1	R3212	F4	RB3207	C4
R1419	*H7	R2103	H2	R3054	*B1	R3213	G4	RB3208	C4
R1420	*H7	R2104	H2	R3055	*F3	R3214	G4	RB3209	C4
R1421	H7	R2105	H2	R3056	*F3	R3215	G4		
R1422	H7	R2303	L2	R3057	L6	R3216	G4	S101	L5
R1423	*H7	R2304	L2	R3100	C7	R3217	G5	S102	K5
R1424	*H7	R2305	*L2	R3101	*D7	R3218	G4	S104	E5
R1425	*H6	R2306	*L2	R3102	E7	R3219	G4	S2300	L1
R1426	*H6	R2307	*L2	R3103	*C7	R3220	G4		
R1431	G5	R2308	L2	R3104	E7	R3250	C2	TP800	L5
R1432	G5	R2309	K2	R3105	E7	R3251	C2	TP801	L6
R1433	H7	R2310	K2	R3106	E7	R3252	F5	TP802	L6
R1434	H7	R2311	L2	R3107	E7	R3253	C2	TP803	L6
R1435	*H6	R2312	K3	R3108	D7	R3254	*F4	TP1350	K5
R1436	*H6	R2313	K3	R3109	E7	R3255	*F4	TP1351	K6
R1437	*H6	R2314	*L2	R3110	E7	R3256	E2	TP1352	K6
R1438	*H6	R2315	*L2	R3111	E7	R3257	H1	TP1353	K6
R1439	J6	R2330	*L3	R3112	E7	R3258	H1	TP1601	G1
R1440	*J7	R2331	L3	R3113	E7	R3259	F1	TP1602	H1
R1441	*J6	R2332	L3	R3114	E7	R3260	F1	TP2300	M1
R1442	*H6	R2333	L3	R3115	E6	R3261	F1	TP2301	M1
R1443	*J7	R2405	K1	R3116	E6	R3280	E7	TP2302	M1
R1444	*H6	R2406	L1	R3117	E6	R3281	*E7	TP2303	M1
R1445	*J5	R2407	K1	R3118	E6			TP3001	F3
R1446	*J7	R2408	*L2	R3121	E6	RB800	*L5	TP3002	F3
R1447	*H7	R2409	K2	R3122	E6	RB801	L6	TP3003	F3
R1448	G5	R2410	K2	R3123	E6	RB900	N5	TP3004	F3
R1449	*H7	R2411	K2	R3124	E6	RB901	M6	TP3101	E2
R1450	H7	R2413	K2	R3125	E3	RB902	P6	TP3102	E2
R1451	*J7	R2414	K2	R3126	E3	RB903	M6		
R1452	G5	R2415	L1	R3127	*D3	RB904	P6	X100	E4
R1453	*H6	R2416	*L2	R3128	*D3	RB1100	*K5		
R1454	*H6	R2417	*L2	R3129	*D3	RB1350	*K6	*:B SIDE	
R1455	*H6	R2418	*K2	R3130	*D3	RB1401	G6		
R1456	*H6	R2419	*L2	R3131	*D3	RB2300	*L1		
R1457	G6	R2420	L1	R3132	*D3	RB2301	L3		
R1458	G6	R2421	*K2	R3133	*D3	RB2302	L3		
R1459	*J6	R2422	*K2	R3134	*D3	RB2303	M1		
R1460	J6	R2423	*K2	R3135	*D3	RB2440	K2		
R1602	H2	R2424	*K2	R3136	*D3	RB2441	K2		
R1603	J5	R2425	K1	R3137	D3	RB2442	K2		
R1604	H2	R2426	K1	R3138	D3	RB2443	K2		
R1605	J5	R2427	K1	R3139	D3	RB3020	*F3		
R1606	J4	R2428	*L2	R3140	D3	RB3021	*F3		
R1607	J4	R2429	*L2	R3141	D3	RB3022	*G3		
R1608	J4	R2430	*L2	R3142	D3	RB3023	*G3		
R1609	J4	R2431	*L2	R3143	D2	RB3100	C7		
R1610	J4	R3000	G3	R3144	D3	RB3101	*D7		
R1611	J4	R3001	G3	R3145	D3	RB3102	*D7		
R1612	J4	R3002	G3	R3146	D3	RB3103	C7		
R1613	J3	R3003	G3	R3147	D3	RB3104	*D7		
R1614	J3	R3004	L6	R3148	D2	RB3105	*D7		
R1615	J4	R3005	K6	R3149	D2	RB3106	*D7		
R1616	J4	R3006	K6	R3150	D2	RB3107	D7		
R1617	J4	R3008	G3	R3151	D2	RB3108	D7		
R1618	J3	R3009	G3	R3152	D2	RB3109	D7		
R1619	J3	R3010	G3	R3153	D2	RB3110	D7		
R1620	J3	R3011	G3	R3154	D2	RB3111	D7		
R1621	J3	R3012	G3	R3155	D2	RB3112	*C7		
R1622	J3	R3013	G3	R3156	D2	RB3113	*C7		
R1623	J3	R3014	G3	R3157	D2	RB3114	C7		
R1624	J3	R3015	G3	R3158	D2	RB3115	C7		
R1625	J3	R3016	G3	R3159	D2	RB3116	D6		
R1626	J3	R3017	G3	R3160	D2	RB3117	D6		
R1627	J3	R3018	G3	R3161	*D3	RB3118	E6		
R1628	J3	R3019	G3	R3162	*D3	RB3120	E6		
R1629	J3	R3020	G3	R3163	*D3	RB3121	D6		
R1630	J4	R3021	G3	R3164	*D3	RB3122	E3		
R1631	H2	R3022	K6	R3165	*D3	RB3123	*E5		
R1633	H2	R3023	F2	R3166	*D3	RB3124	E3		
R1634	J4	R3024	F2	R3167	*D3	RB3125	D3		
R1700	J4	R3025	G2	R3180	*E6	RB3126	D3		
R1701	J4	R3026	*F3	R3181	E6	RB3127	E6		
R1702	J4	R3027	*F3	R3182	E6	RB3128	E6		
R1703	J4	R3028	*G3	R3183	E6	RB3129	D7		
R1704	H4	R3029	*G3	R3188	E6	RB3130	D7		
R1705	H4	R3030	*F3	R3189	D2	RB3131	D6		
R1706	H4	R3031	B2	R3190	D2	RB3132	D6		
R1707	H4	R3032	B2	R3191	E7	RB3133	D7		
R1708	H4	R3033	B2	R3192	E7	RB3134	D7		
R1709	H4	R3034	B2	R3193	E3	RB3135	D7		
R1800	H4	R3035	C1	R3194	D3	RB3136	*E3		
R1801	H4	R3036	E7	R3195	E2	RB3137	*E3		
R1802	H4	R3037	C1	R3196	E2	RB3138	D4		
R1803	H4	R3038	E7	R3197	E6	RB3139	D4		
R1804	H4	R3039	C1	R3198	E6	RB3140	D4		

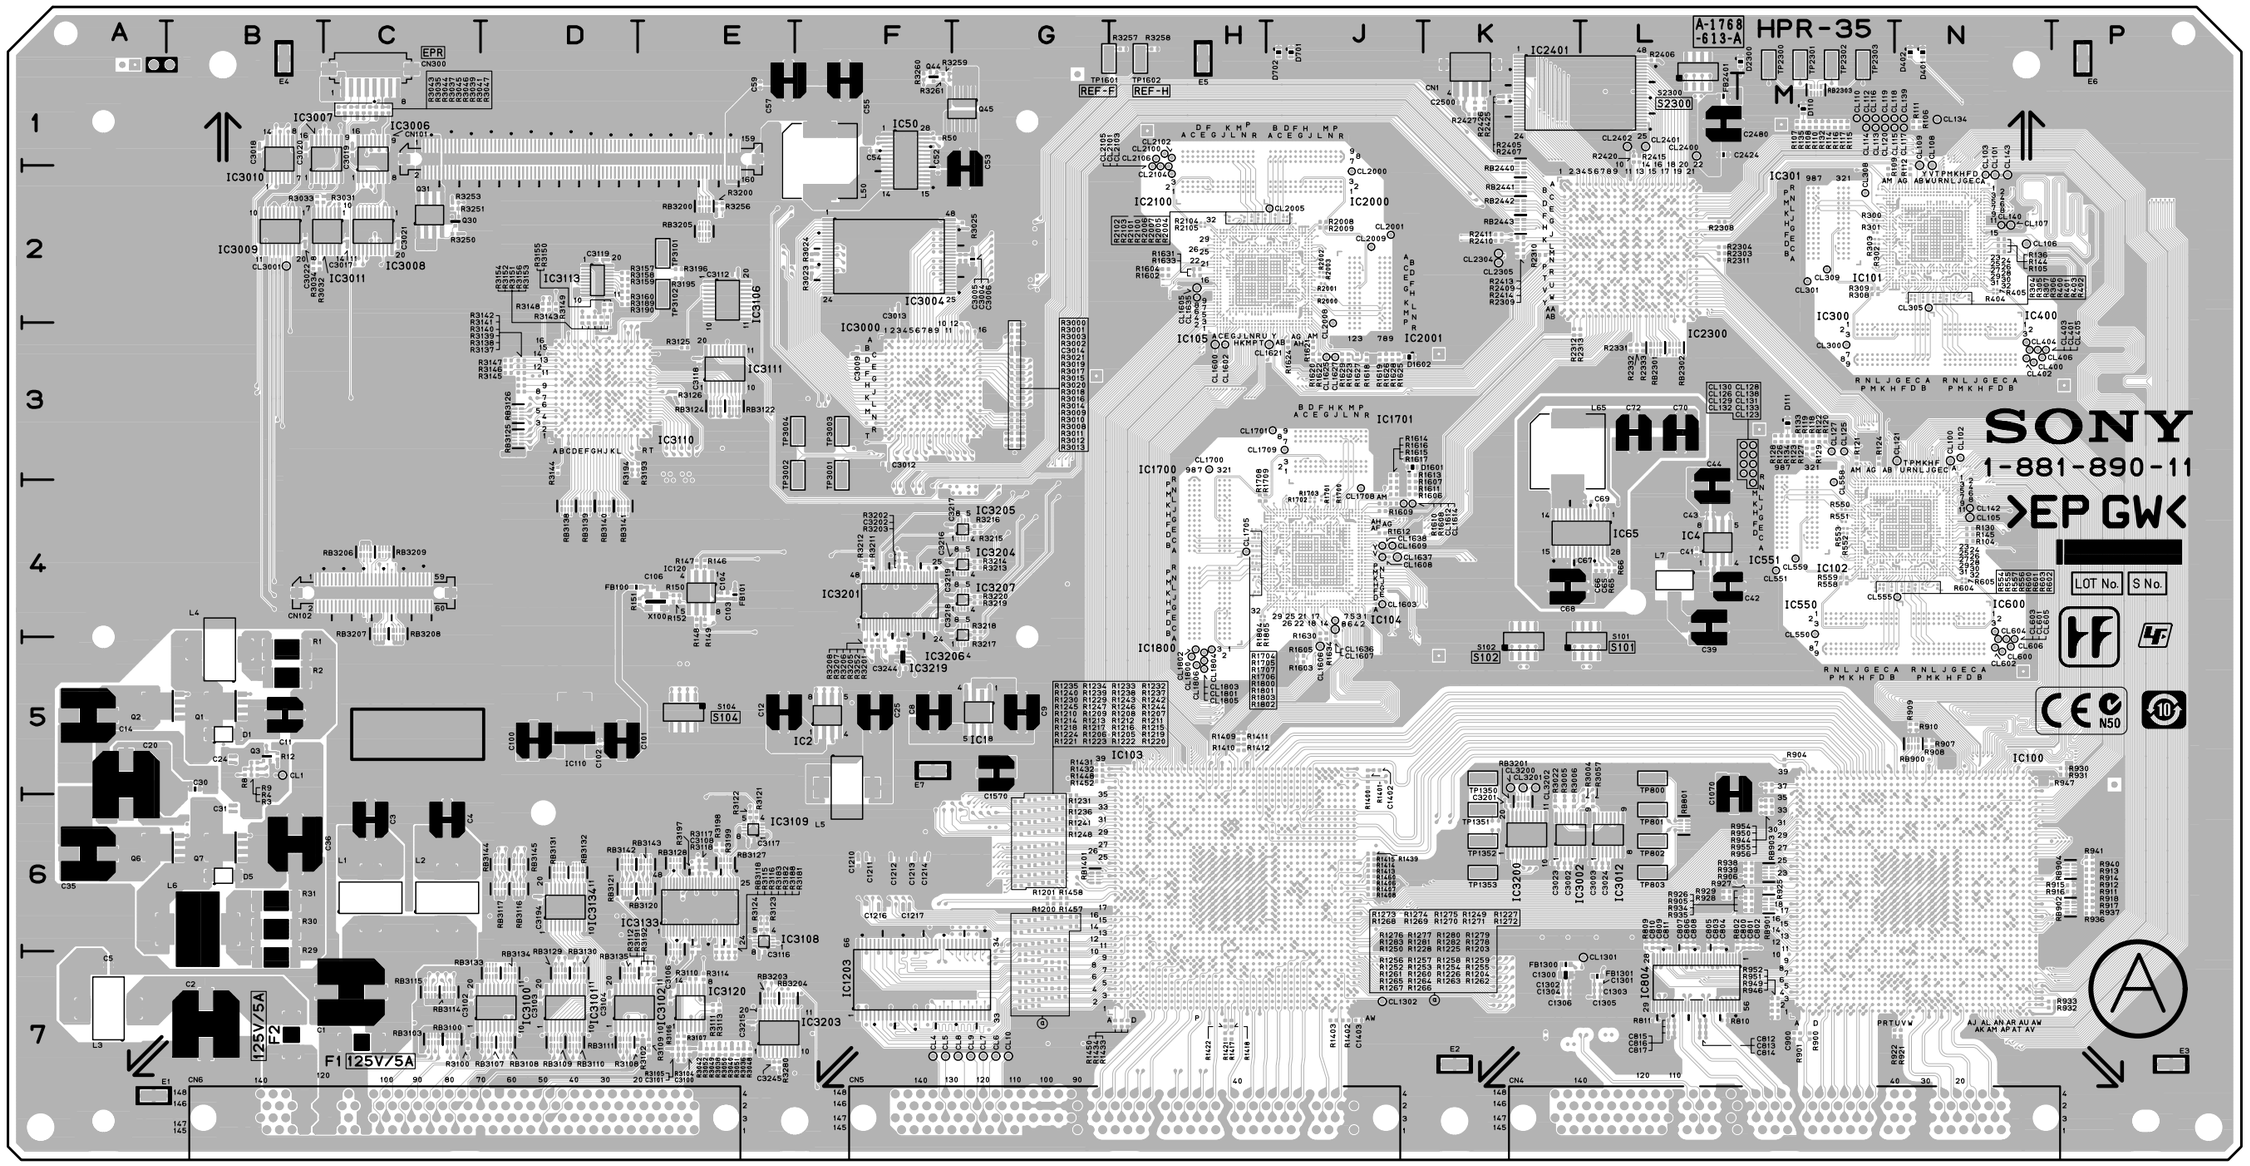

HPR-35 -A SIDE-
SUFFIX: -11

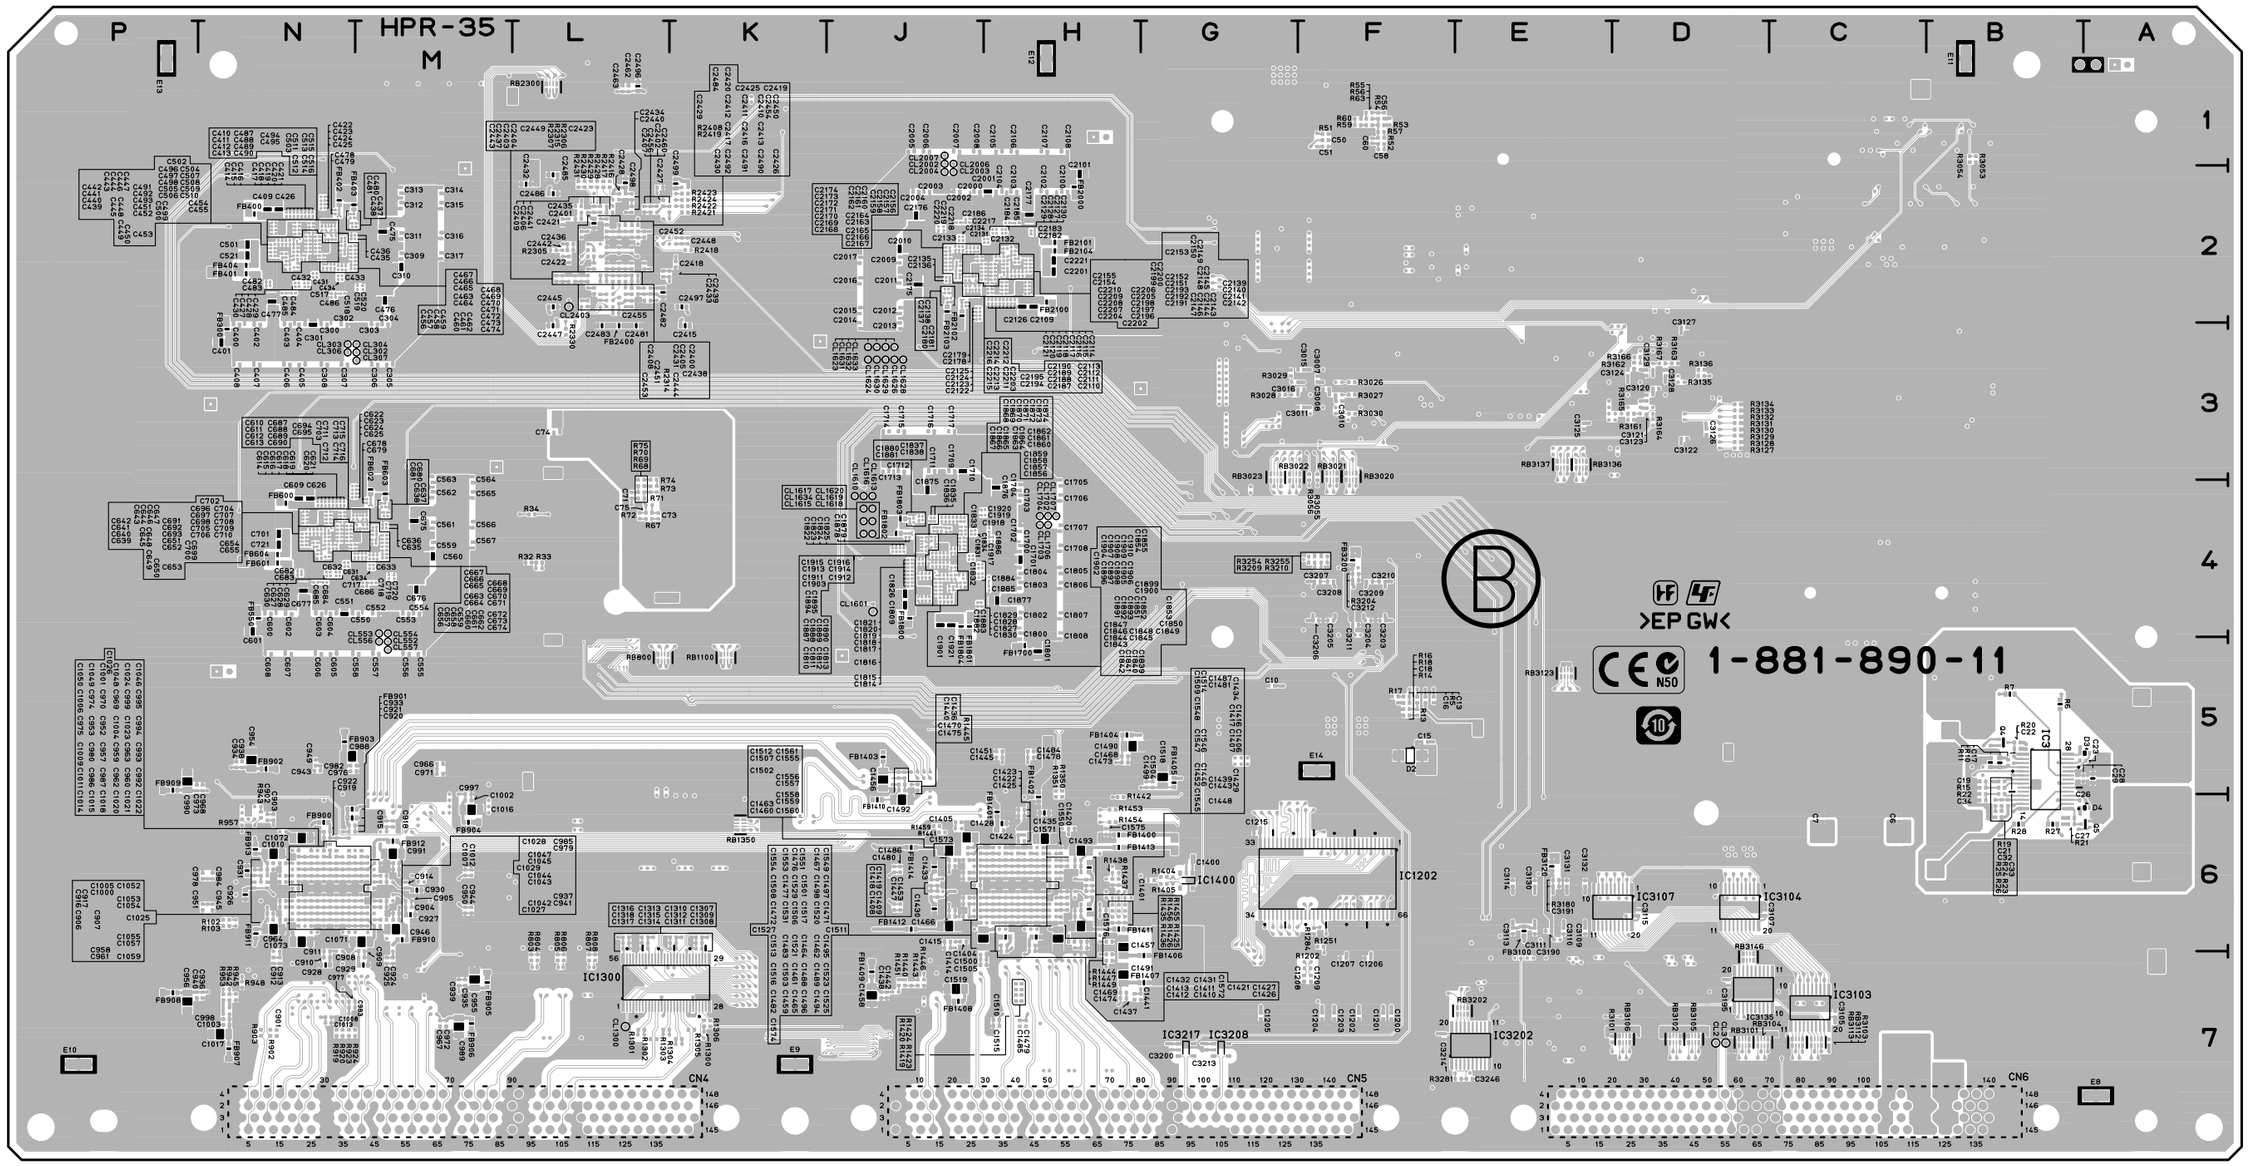

HPR-35 -B SIDE-
SUFFIX: -11

KY-526G (1-689-496-11)

C1	*G4	FB15	*H4	S66	G5
		FB16	*H4	S67	G5
CN1	*H4	FB17	*H4	S68	G5
		FB18	*H4	S69	H4
D1	*G3	FB19	*H4	S70	H5
D2	*G3	FB20	*H4	S71	H5
D3	*G3			S72	H5
D4	*G3	Q1	*G3	S73	H5
D5	*G3	Q2	*G3	S74	A2
D6	*G3	Q3	*G3		
D7	*G3	Q4	*G3	VDR1	*H4
D8	*G3	Q5	*G3	VDR2	*H4
D9	*G3	Q6	*H3	VDR3	*H4
D10	*G3	Q7	*H3	VDR4	*H4
D11	*G3	Q8	*H3	VDR5	*H4
D12	*G3	Q9	*H3	VDR6	*H4
D13	*G3	Q10	*H3	VDR7	*H4
D14	*G3			VDR8	*G4
D15	*G3	R1	*G4	VDR9	*H4
D16	*G3	R2	*G4	VDR10	*G4
D17	*G3	R3	*G4	VDR11	*H4
D18	*G3	R4	*H4	VDR12	*G4
D19	*G3	R5	*H4	VDR13	*H4
D20	*G3	R6	*H4	VDR14	*G4
D21	*G3	R7	*H4	VDR15	*G4
D22	*G3	R8	*H4	VDR16	*G4
D23	*G3			VDR17	*G4
D24	*G3	S1	B1	VDR18	*H4
D25	*G5	S2	B1		
D26	*G5	S3	B1	*:B SIDE	
D27	*G5	S4	C1		
D28	*G5	S5	C1		
D29	*G5	S6	C1		
D30	*G5	S7	D1		
D31	*G5	S8	D1		
D32	*G5	S9	D1		
D33	*H5	S10	E1		
D34	*H5	S11	E1		
D35	*H5	S12	E1		
D36	*H5	S13	B1		
D37	*H5	S14	B1		
D38	*H5	S15	B1		
D39	*H5	S16	C1		
D40	*H5	S17	C1		
D41	*H5	S18	C1		
D42	*H5	S19	D1		
D43	*H5	S20	D1		
D44	*H5	S21	D1		
D45	*H5	S22	E1		
D46	*H5	S23	E1		
D47	*H5	S24	E1		
D48	*H5	S25	F2		
D49	*H3	S26	F2		
D50	*H3	S27	F3		
D51	*H3	S28	F3		
D52	*H3	S29	F4		
D53	*H3	S30	F4		
D54	*H3	S31	F5		
D55	*H3	S32	F5		
D56	*H3	S33	A1		
D57	*H3	S34	A1		
D58	*H3	S35	A2		
D59	*H3	S36	A3		
D60	*H3	S37	A3		
D61	*H3	S38	A4		
D62	*H3	S39	A4		
D63	*H3	S40	B5		
D64	*H3	S41	B5		
D65	*H4	S42	C5		
D66	*H4	S43	C5		
D67	*H4	S44	C5		
D68	*H4	S45	D5		
D69	*H4	S46	A5		
D70	*H4	S47	A5		
D71	*H4	S48	G3		
D72	*H4	S49	G3		
D73	*H3	S50	G3		
D74	*H5	S51	H3		
		S52	G3		
FB2	*G4	S53	G3		
FB3	*G4	S54	H3		
FB4	*G4	S55	G2		
FB5	*G4	S56	G2		
FB6	*G4	S57	H2		
FB7	*G4	S58	G3		
FB8	*H4	S59	H3		
FB9	*H4	S60	H2		
FB10	*H4	S61	H3		
FB11	*H4	S62	H3		
FB12	*H4	S63	H3		
FB13	*G4	S64	G4		
FB14	*G4	S65	G4		

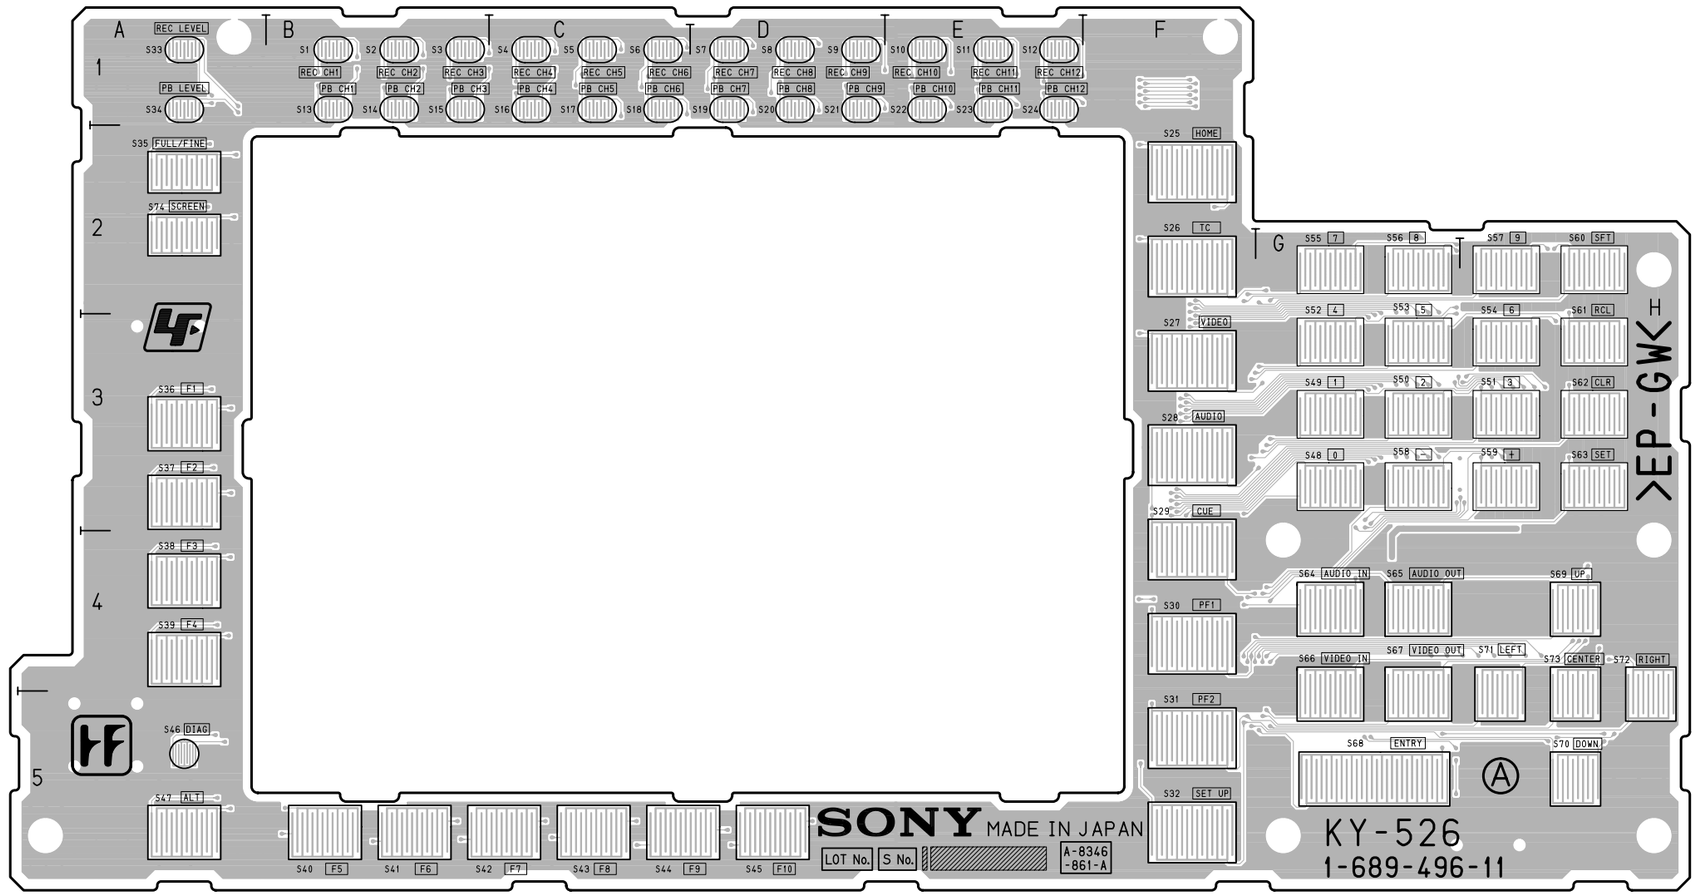

KY-526G -A SIDE-
SUFFIX: -11

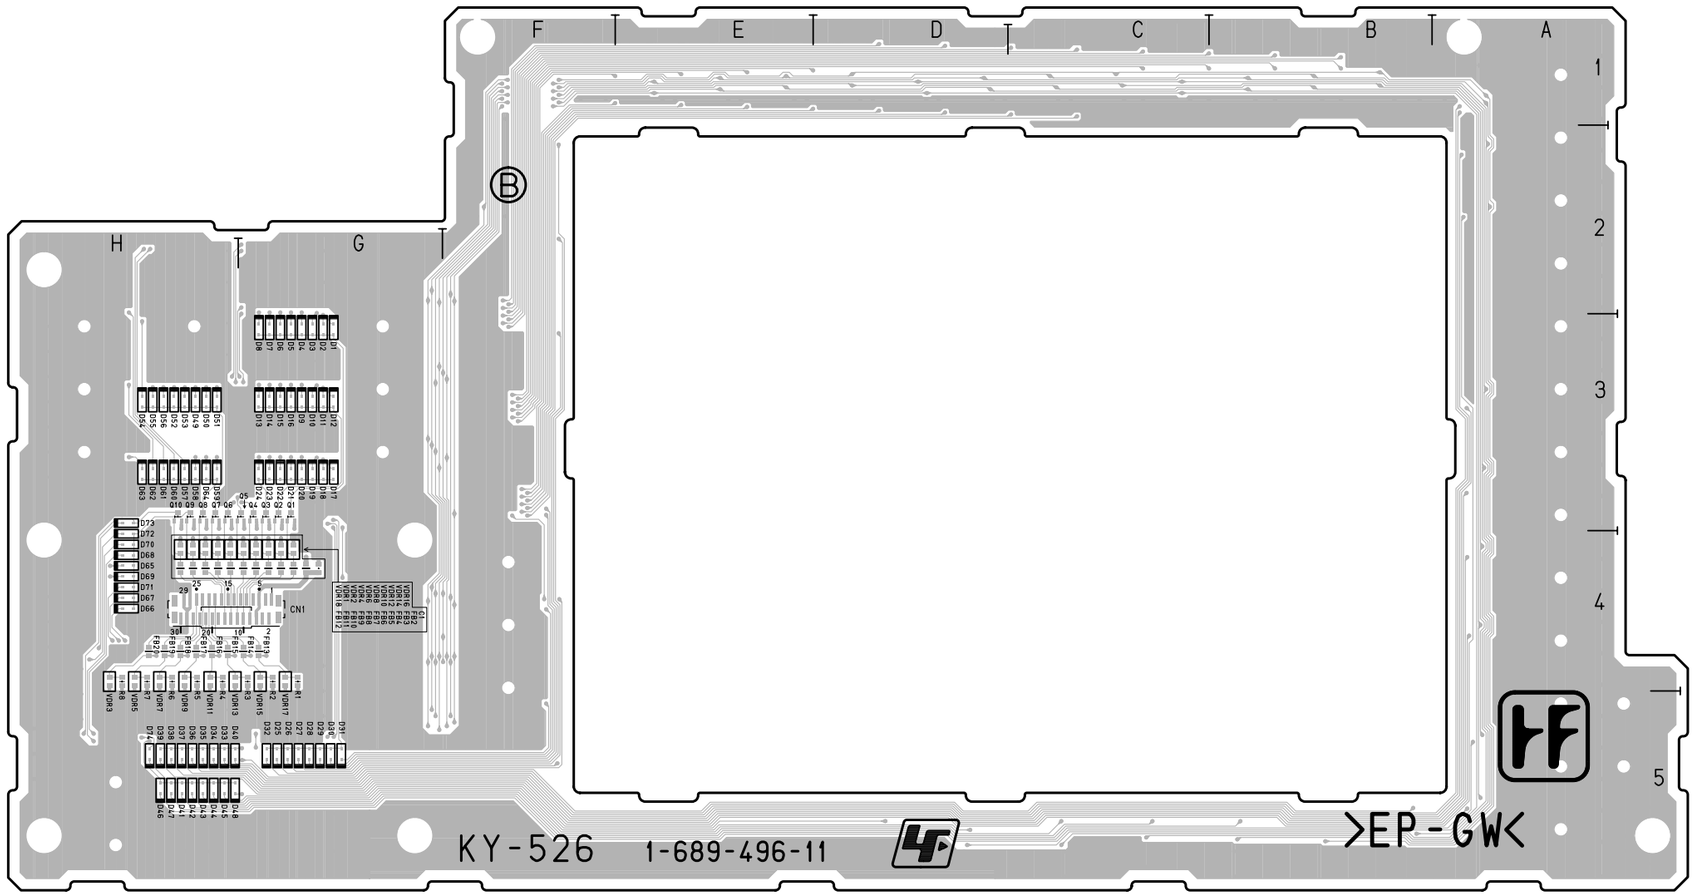

KY-526G -B SIDE-
SUFFIX: -11

KY-527 (1-689-497-12)

C1	B1	Q25	E2
C2	A1	Q26	B3
C3	A1	Q27	E2
C4	B1	Q28	E2
		Q29	C3
CL1	B1	Q30	E2
CL2	A1	Q31	E1
CL3	A1	Q32	E1
		Q33	C3
CN1	*B1	Q34	E1
		Q35	C2
D1	C2	Q36	C2
D2	B3		
D3	C2	R1	A1
D4	C2	R2	C1
D5	C3	R3	C3
D6	D1	R4	D2
D7	C2	R13	C1
D8	C3	R14	C3
D9	D1	R16	C3
D10	E2	R17	D1
D11	E2	R18	C1
D12	B2	R19	C3
D13	E1	R20	D3
D14	E2	R21	E1
D15	C2	R22	E2
D16	E1	R23	D3
D17	E1	R32	E2
D18	C2	R33	C2
D19	E1	R34	E1
D20	E1	R39	C3
D21	B2	R40	E2
D22	C2	R41	A1
		R42	A1
EN1	A1	R43	A1
		R44	A1
FB1	A1	R45	A1
FB2	B1	R46	A1
FB3	B1	R47	C2
FB4	B1	R48	E1
FB5	B1	R49	E1
FB6	B1	R50	C3
FB7	B1	R51	D2
FB8	B1	R52	E1
FB9	B1	R53	D3
FB10	B1	R54	E1
FB11	B1	R55	C2
FB12	B1	R56	B2
FB13	B1	R57	C2
FB14	B1	R58	C2
FB15	B1	R59	A1
FB16	B1	R60	A1
FB17	B1	R61	A1
FB18	B1	R62	A1
FB19	B1		
FB20	B1	S1	C3
FB21	B1	S2	D2
FB22	B1	S3	C3
FB23	B1	S4	D2
FB24	B1	S5	D3
FB25	B1	S6	D2
FB26	B1	S7	C3
FB27	B1	S8	E1
FB28	B1	S9	C3
FB29	B1	S10	E1
FB30	B1	S11	D3
FB31	B1	S12	C2
FB32	B1	S13	C2
FB33	B1		
FB34	B1	VDR1	B1
FB35	B1	VDR2	B1
FB36	B1	VDR3	B1
FB37	A1	VDR4	A1
FB38	B1	VDR5	B1
FB39	A1	VDR6	B1
FB40	B1	VDR7	B1
FB41	B1	VDR8	A1
		VDR9	B1
IC2	A1	VDR10	B1
		VDR11	B1
Q1	B2	VDR12	B1
Q2	D1	VDR13	B1
Q3	C1		
Q8	C3	*:B SIDE	
Q9	C2		
Q10	C1		
Q11	C1		
Q12	C3		
Q13	C2		
Q22	E2		
Q23	C3		
Q24	D2		

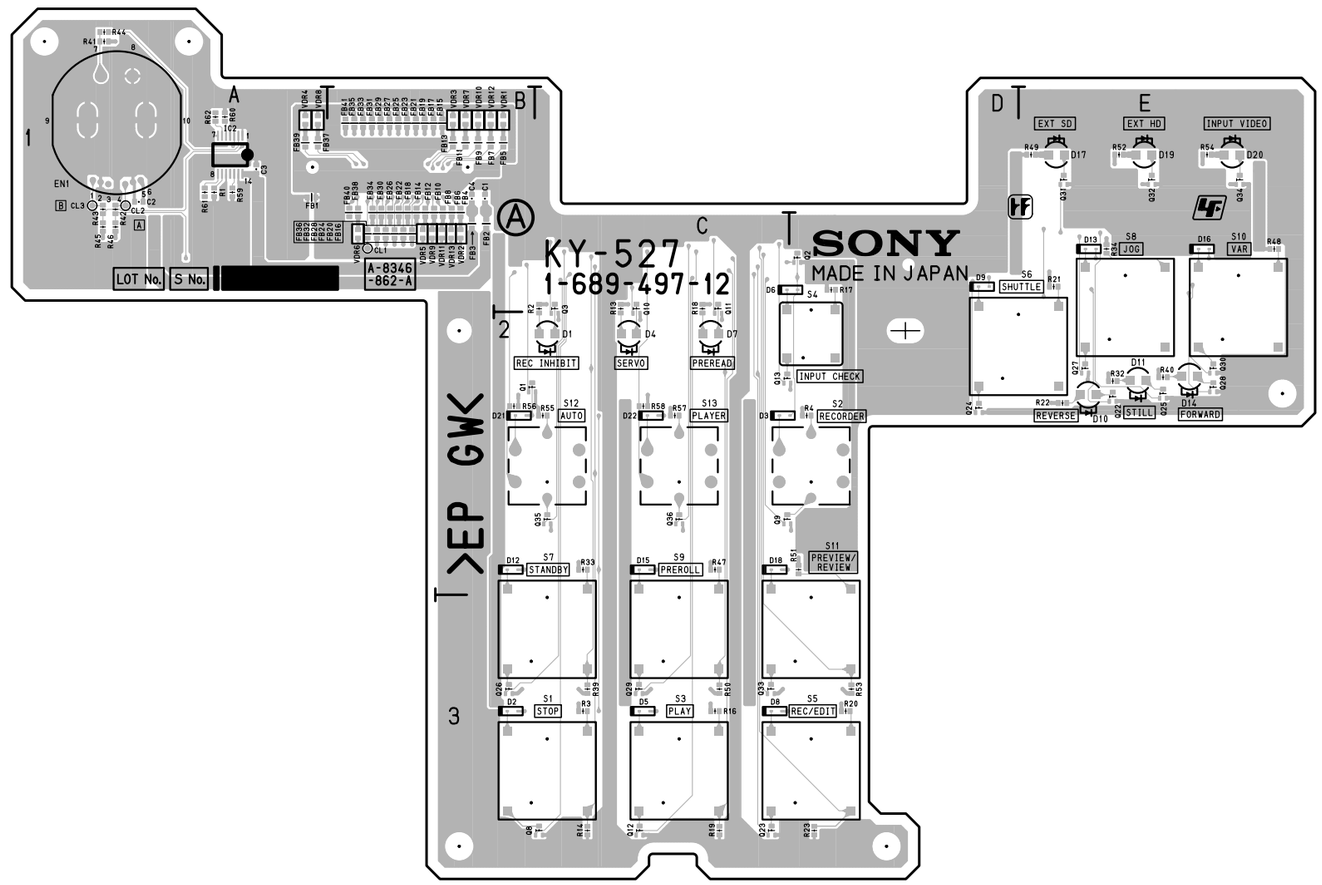

KY-527 -A SIDE-
SUFFIX: -12

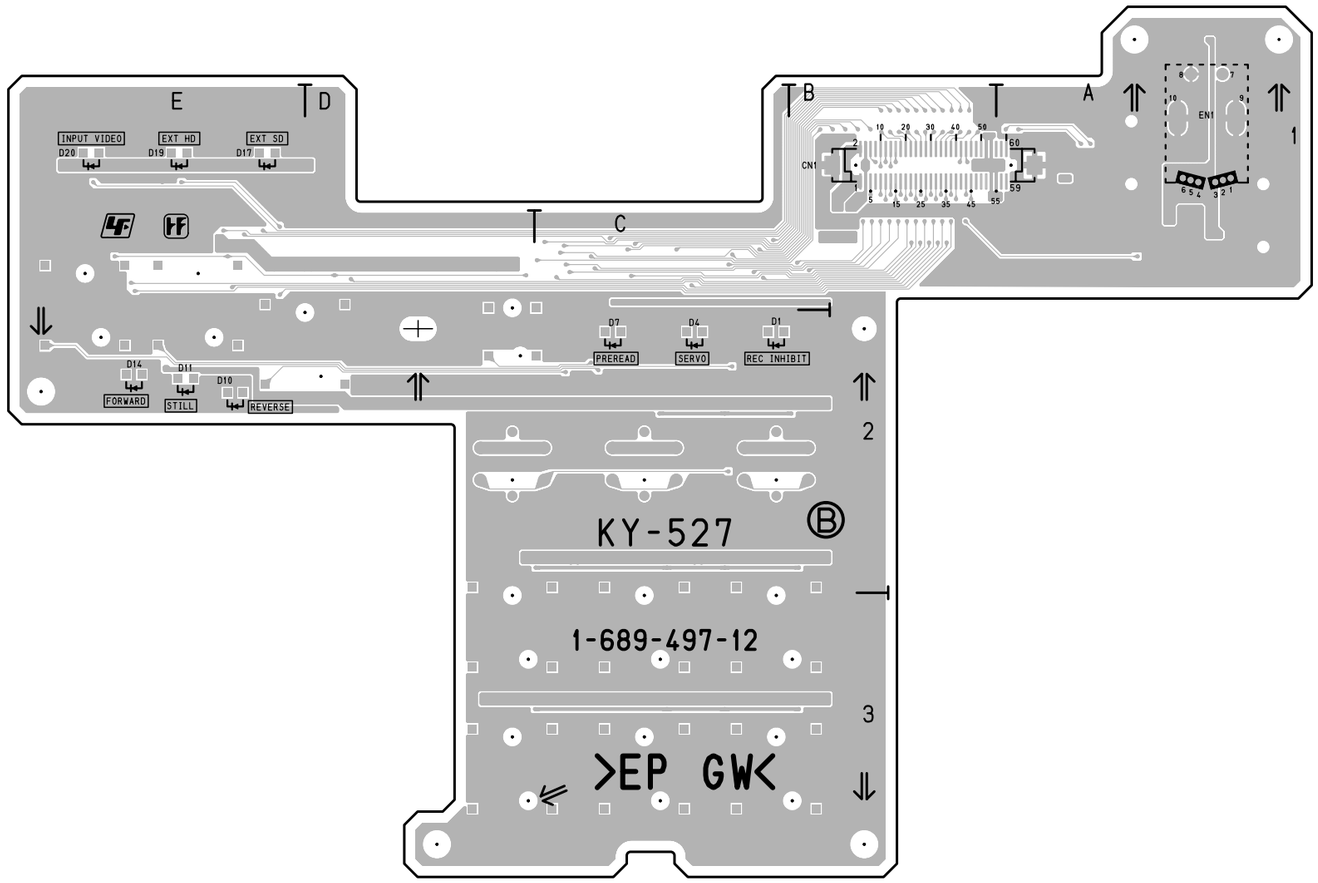

KY-527 -B SIDE-
SUFFIX: -12



LED-455 -A SIDE-
SUFFIX: -11

LED-455 -B SIDE-
SUFFIX: -11

LED-455 (1-874-869-11)

C1	A1
CN1	A1
D1	A1
D2	A1
D3	A1
D4	A1
D5	A1
D6	A1
D7	A1
D8	A1
D9	A1
D10	A1
D11	A1
D12	A1
D13	A1
D14	A1
D15	A1
Q1	A1
Q2	A1
Q3	A1
R1	A1
R2	A1
R3	A1
R4	A1
R5	A1
R6	A1
R7	A1
R8	A1
R9	A1
R10	A1
R11	A1
R12	A1
R13	A1
R14	A1
R15	A1



LP-81 -A SIDE-
SUFFIX: -31



LP-81 -B SIDE-
SUFFIX: -31



LP-81 -A SIDE-
SUFFIX: -32



LP-81 -B SIDE-
SUFFIX: -32

MB-1101 (1-874-870-11)

CN1	B4
CN2	F4
CN3	J4
CN4	B5
CN5	F5
CN6	J5
CN7	B6
CN8	F6
CN9	J6
CN10	B6
CN11	F6
CN12	J6
CN13	B7
CN14	F7
CN15	J7
CN16	B8
CN17	F8
CN18	J8
CN19	B8
CN20	F8
CN21	J8
CN22	B9
CN23	F9
CN24	J9
CN41	B9
CN42	F9
CN51	K1
CN61	C3
CN62	E3
CN65	J2
CN68	G4
CN69	J2
CN71	L7
CN72	L7
CN73	H1
CN74	A3
CN75	A4
CN76	A4
CN77	A4
CN78	A5
CN79	H3
CN100	L3
Q1	H2
Q2	J2
Q3	J3
Q4	J2
R1	H2
R2	J2
R3	J3
R4	J3

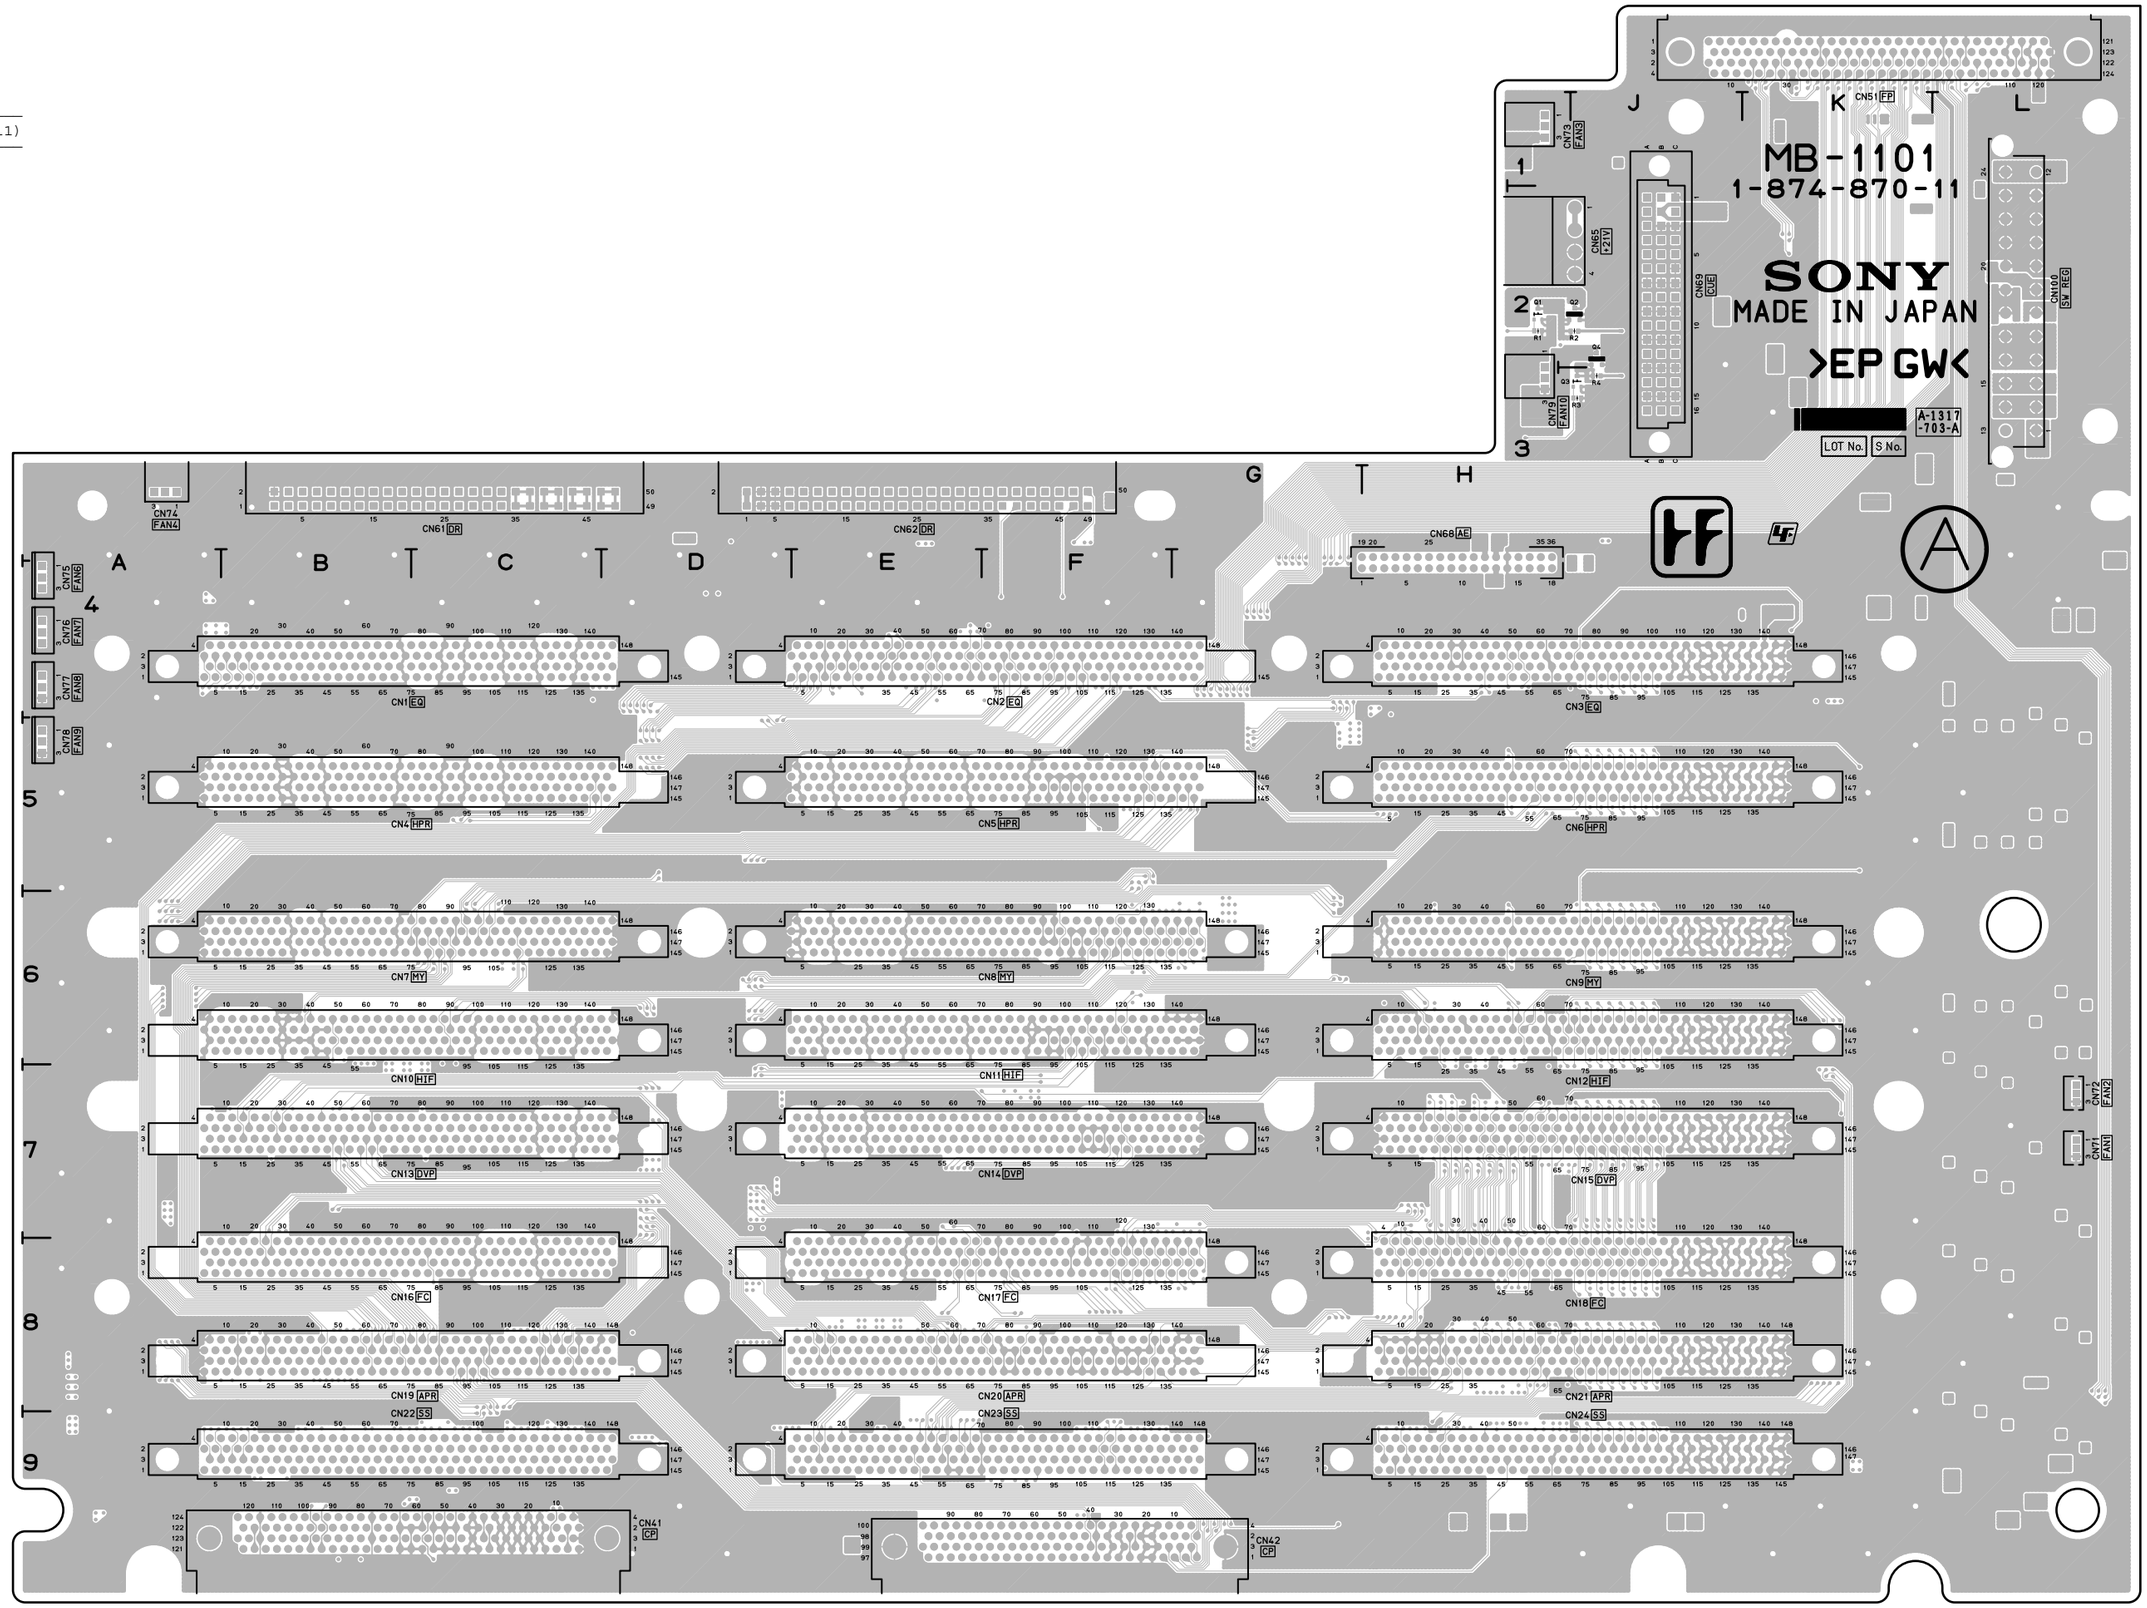

MB-1101 -A SIDE-
SUFFIX: -11

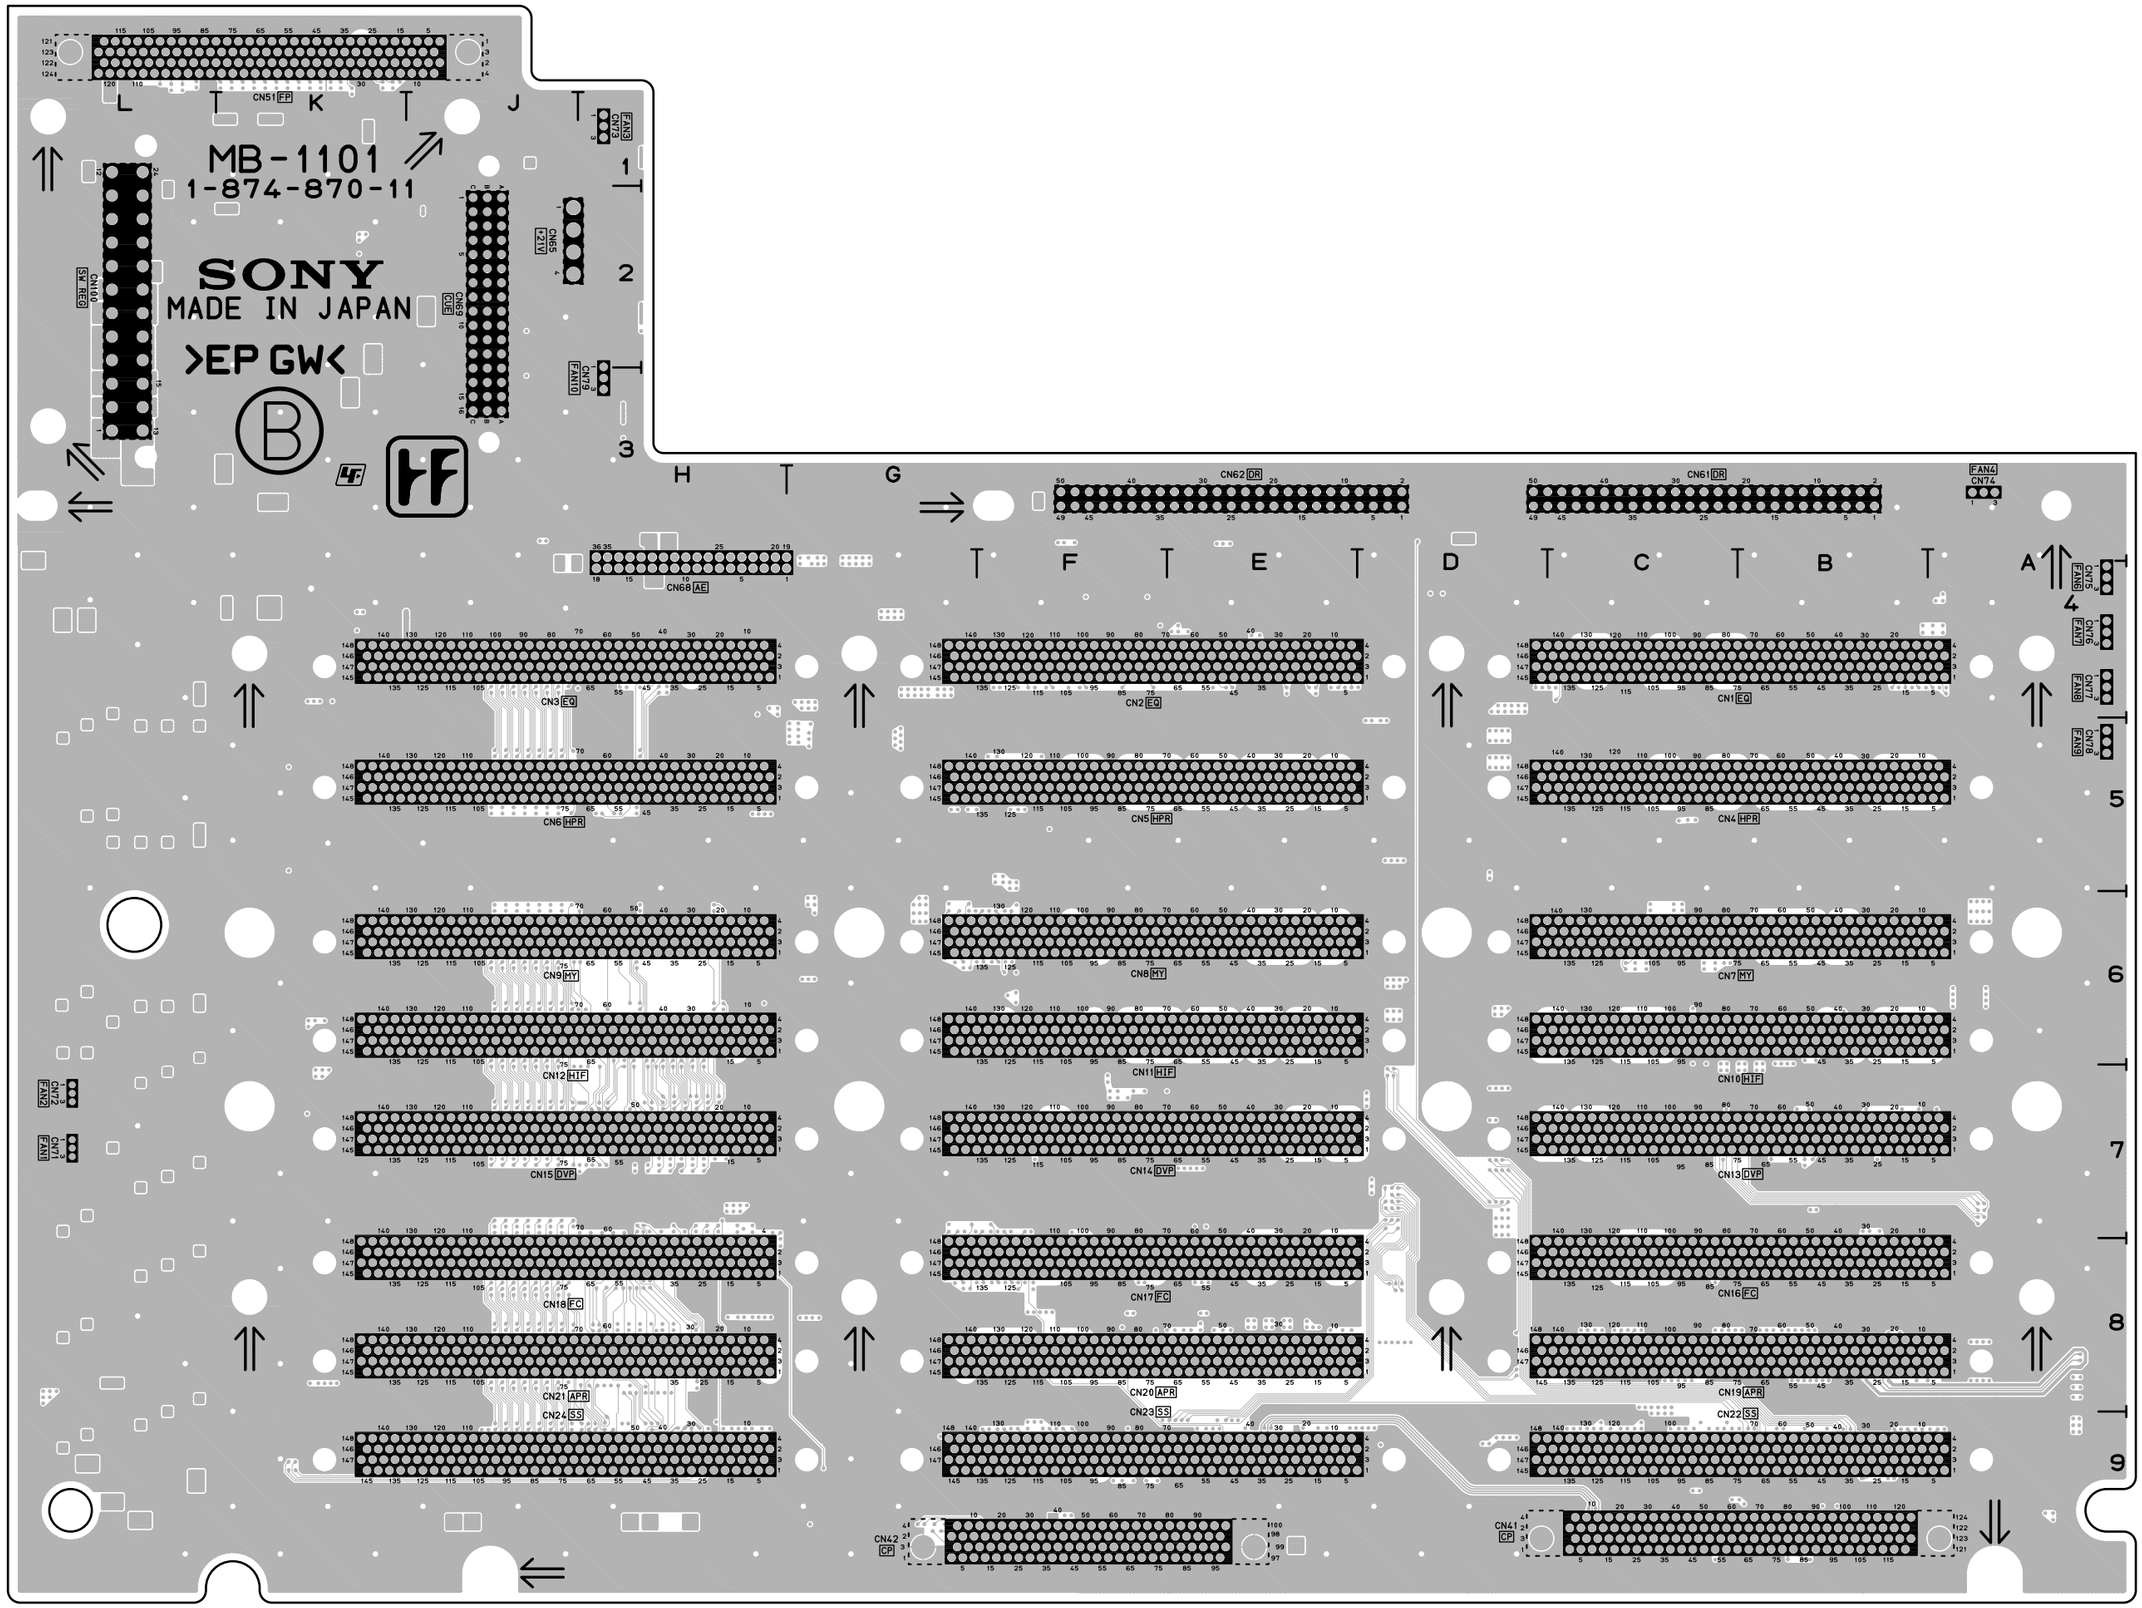

MB-1101 -B SIDE-
SUFFIX: -11

PC-70 (1-648-571-32)

CN934	A1
PH1	A1
PH2	A1
PH3	A1
R1	A1
R2	A1
R3	A1
R4	A1
R5	A1
R6	A1
R7	A1
R8	A1
R9	A1

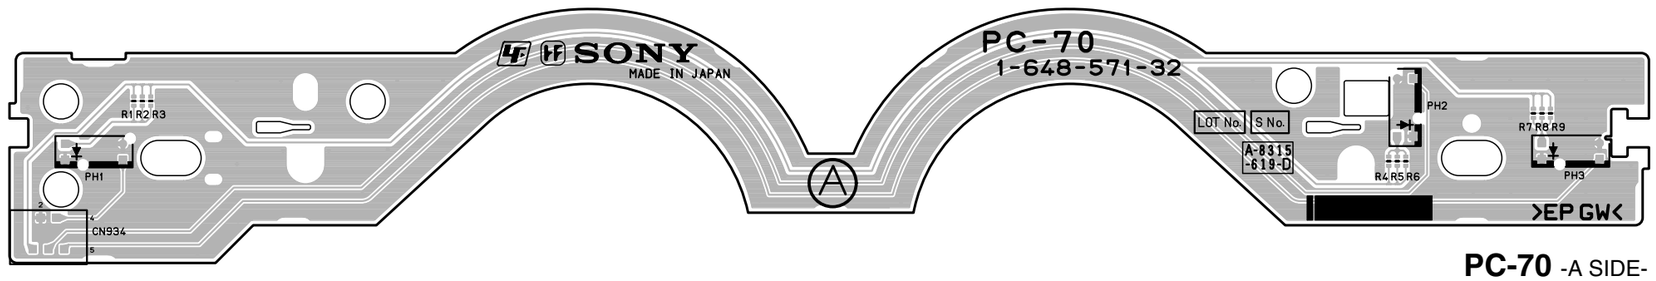

PC-70 -A SIDE-
SUFFIX: -32

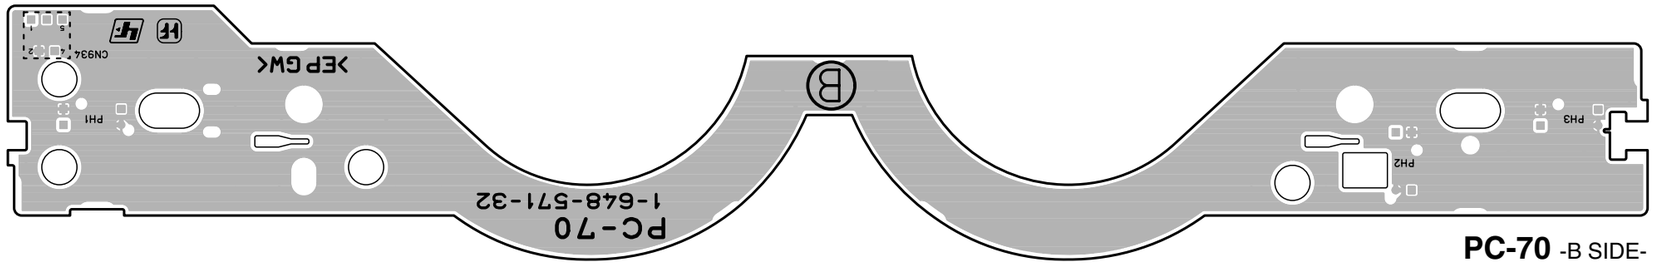

PC-70 -B SIDE-
SUFFIX: -32

SS-102 (1-874-864-11)

C100	B5	C308	*J4	C603	B2	C734	*D3	C1036	L4	C1242	*M3	C1503	N2	C1644	*P2			IC410	*J4	IC1302	M4	R102	A1	R326	J3	R432	J2	R557	*G4	R682	*C1	R885	*E4	R1001	J3
C101	C5	C309	*H4	C604	C2	C735	*D3	C1037	L4	C1243	*M3	C1504	M2	C1645	*P2	E200	*D3	IC411	H2	IC1303	*M4	R103	D2	R327	J3	R433	J2	R558	*G4	R683	A2	R886	*E4	R1002	J3
C102	B4	C310	*H4	C605	B2	C736	*C4	C1038	K4	C1244	M3	C1505	M2	C1646	*P2	E400	G1	IC412	H2	IC1304	L4	R104	E2	R328	J3	R434	J2	R559	*G4	R684	A2	R887	*E5	R1003	J3
C103	A5	C311	F5	C606	C2	C737	*C4	C1100	*K5	C1245	*M3	C1506	N2	C1647	*P2	E500	F4	IC413	*G2	IC1305	L4	R109	E2	R329	*H4	R435	J2	R560	*G4	R685	A3	R888	*E5	R1004	J3
C104	A5	C312	F5	C607	C2	C738	*C4	C1101	*K5	C1246	M3	C1507	M2	C1648	*P2	E600	A1	IC500	G4	IC1306	N3	R118	E2	R330	*J4	R436	J2	R561	*H4	R686	A3	R889	*E4	R1005	J3
C105	A4	C313	G5	C608	B2	C739	*C4	C1102	*K5	C1247	M3	C1508	*N2	C1649	*P2	E700	B4	IC501	E4	IC1307	L4	R132	*E2	R331	*J4	R437	H3	R562	*H4	R687	A2	R890	*E4	R1006	K3
C106	E2	C314	G5	C609	C2	C740	*C4	C1103	*K5	C1248	M3	C1509	*M2			E800	D4	IC502	E4	IC1308	L5	R134	E2	R332	*H4	R438	J2	R563	*H4	R688	A2	R891	*E4	R1007	*L2
C107	E2	C315	*H4	C610	C2	C741	*C3	C1104	K5	C1249	N1	C1510	M2	CL701	C4	E1000	L3	IC503	*G5	IC1309	L5	R139	G2	R333	*H4	R439	J2	R564	*H4	R689	A3	R892	E4	R1008	M1
C108	F2	C316	E5	C611	B2	C742	*C3	C1105	K5	C1300	*N3	C1511	M2	CL702	C4	E1200	P5	IC504	E5	IC1310	L5	R140	F2	R334	*H4	R440	*H2	R565	*H4	R690	A3	R893	E4	R1009	M1
C109	F2	C317	F5	C612	C2	C743	*C3	C1106	K5	C1301	N3	C1512	*N2	CL703	C4	E1201	*K4	IC505	E5	IC1311	M5	R141	*E2	R335	*H4	R441	*H2	R566	*H4	R691	A3	R912	C5	R1010	M1
C110	F2	C318	G5	C613	B2	C744	D4	C1107	K5	C1302	M5	C1513	*M2	CL704	C4	E1300	M3	IC506	G4	IC1312	M5	R142	*E2	R336	*H4	R442	*H3	R567	*H4	R692	B3	R913	D5	R1011	M1
C111	D2	C319	H5	C614	*B2	C745	C3	C1108	*K5	C1303	M4	C1514	N2	CL705	D4	E1301	M4	IC507	*F4	IC1313	N4	R143	*E2	R337	*J4	R443	H3	R568	*H4	R693	C3	R914	D5	R1012	M1
C112	D2	C320	H5	C615	*B2	C746	E3	C1109	*K5	C1304	M4	C1515	N2	CL706	D4	E1302	N4	IC508	F4	IC1314	N4	R144	E2	R338	*J4	R444	*H2	R569	*G4	R694	B3	R915	D5	R1013	M1
C113	E2	C321	H5	C616	B1	C817	D5	C1110	*K5	C1305	*N3	C1516	M2	CL1001	J3	E1500	M2	IC509	E5	IC1315	N4	R145	G2	R343	*H5	R445	H2	R570	*G4	R695	B3	R916	D5	R1014	M1
C114	F2	C400	*J5	C617	B1	C818	D4	C1111	*K5	C1306	M4	C1517	M2	CL1002	J3	E1600	*N1	IC510	E5	IC1316	N4	R146	F2	R344	*H5	R446	*H2	R571	*G4	R696	*C3	R918	D5	R1015	M1
C115	F2	C401	*G2	C618	B1	C819	D5	C1112	*K5	C1307	N3	C1518	M2	CL1003	J3			IC511	*E4	IC1317	N4	R147	F1	R345	*H5	R447	H2	R572	*G4	R697	*D3	R919	D5	R1016	M1
C116	E2	C402	*H1	C619	B1	C820	*D4	C1113	*K5	C1308	*N3	C1519	M2	CL1004	J3	F100	B5	IC512	*F4	IC1318	N3	R148	F1	R347	*H5	R448	*H2	R573	G4	R698	*D3	R920	D5	R1017	*K4
C117	F2	C403	H4	C620	C1	C821	D4	C1114	*K5	C1309	L4	C1520	*N2	CL1100	L3	F101	A5	IC600	B2	IC1319	N5	R149	F1	R348	*H5	R449	H2	R574	G4	R699	A2	R921	D5	R1018	*K4
C118	F2	C404	*J5	C621	B1	C822	D4	C1115	*K5	C1310	M4	C1521	*M2	CL1101	L3	F102	A5	IC601	*B1	IC1320	N5	R150	F1	R349	*H5	R450	H2	R575	F4	R700	*D4	R922	D5	R1100	*K5
C119	E2	C405	J4	C622	B1	C823	E4	C1116	K4	C1311	M4	C1522	N2	CL1102	L3	F103	B5	IC602	*C1	IC1321	N4	R151	F1	R350	H3	R451	*H2	R576	*G4	R701	*D4	R923	D5	R1101	*K5
C120	F2	C406	J1	C623	B1	C824	E4	C1117	K4	C1312	L4	C1523	*M2	CL1103	P5			IC603	B3	IC1322	N5	R152	F1	R351	H3	R452	*G2	R577	*G4	R702	D3	R927	*D5	R1102	*K5
C121	E2	C407	G1	C624	*B1	C825	*D4	C1118	*K3	C1313	N3	C1524	*N2	CL1104	M1	FB100	D2	IC604	C3	IC1323	N5	R153	F1	R352	H3	R453	*H2	R578	*G4	R703	D3	R928	D5	R1103	*K5
C122	*E2	C408	J4	C625	A2	C826	*D4	C1119	*K3	C1314	N3	C1525	*M2	CL1200	N5	FB101	E1	IC605	A3	IC1500	*N3	R154	F1	R353	H3	R454	*J5	R579	*G4	R704	D3	R929	B4	R1106	*K4
C123	*E2	C409	*J4	C626	C1	C827	*E4	C1120	*K3	C1315	N3	C1526	*N2	CL1201	N5	FB102	E1	IC606	A2	IC1502	N3	R155	F1	R354	H3	R455	*J5	R580	*G4	R705	A4	R930	B4	R1107	*K5
C124	E1	C410	*J4	C627	*C1	C828	D5	C1121	*K3	C1316	L4	C1527	*M2	CL1202	N5	FB400	J1	IC607	*B3	IC1503	N2	R156	F1	R355	H4	R456	*H2	R581	*G4	R706	A4	R931	B4	R1108	*K5
C125	F1	C411	*J4	C628	A2	C829	*D4	C1122	*L2	C1317	M4	C1528	M2	CL1204	P1	FB401	H3	IC608	D3	IC1504	N2	R157	F1	R356	H4	R457	J2	R582	*G4	R707	A4	R932	B4	R1109	*K5
C126	E1	C412	*J4	C630	A2	C830	*E4	C1123	*L2	C1318	L4	C1529	M2	CL1205	P1	FB402	H2	IC609	A2	IC1505	M2	R158	F1	R357	H4	R458	H2	R583	*G4	R708	A4	R933	B4	R1110	*K5
C127	E1	C413	J5	C631	A1	C831	*E4	C1124	*L2	C1319	*M5	C1530	N2	CL1206	P1	FB403	J3	IC610	*C3	IC1506	M2	R159	F1	R358	H4	R459	H2	R584	*G1	R709	A4	R934	B4	R1111	*K5
C128	F1	C414	*J5	C632	A2	C832	*E4	C1125	K4	C1320	*M5	C1531	N2	CL1207	P1	FB503	*G5	IC611	*A3	IC1507	M2	R160	*E2	R359	H4	R460	*G2	R585	G4	R710	A4	R935	D5	R1112	*K5
C129	E1	C415	*J5	C634	A3	C833	*E4	C1126	*K5	C1321	*M5	C1532	*N2			FB504	*H4	IC612	*B3	IC1508	N2	R161	F1	R360	H4	R461	*H2	R586	G4	R711	A4	R936	D5	R1113	*K5
C130	F1	C416	*J5	C635	A3	C834	*E4	C1127	*K5	C1322	*L5	C1533	*M2	CN22	M5	FB505	*G4	IC613	*C3	IC1509	N2	R162	F1	R361	H4	R462	*H2	R587	H4	R712	A4	R937	C4	R1114	*K5
C131	E1	C417	J4	C636	B3	C835	*E4	C1128	K5	C1323	*M5	C1534	N2	CN23	G5	FB506	*F4	IC614	*B3	IC1510	M2	R163	F1	R362	H4	R463	H2	R588	H4	R713	A4	R938	C4	R1115	*K5
C133	G1	C418	*J5	C637	A3	C836	E4	C1129	K5	C1324	*M5	C1535	M2	CN24	C5	FB507	F4	IC615	*C3	IC1511	M2	R167	E1	R363	H4	R464	H2	R589	*G4	R714	A4	R939	C4	R1116	*K5
C134	D2	C419	J3	C638	B3	C837	E4	C1130	*K5	C1325	*M5	C1536	*N3	CN100	E1	FB508	H4	IC618	B3	IC1512	N2	R168	*D2	R364	H4	R465	*H2	R590	*F4	R715	A4	R940	C4	R1117	*K5
C135	*E1	C420	J2	C639	B3	C838	E5	C1131	*K5	C1326	*L5	C1537	*N2	CN101	F1	FB600	B1	IC700	D4	IC1513	M2	R169	*F1	R365	H4	R466	H2	R591	*F4	R716	A4	R941	C4	R1118	*K5
C136	*D2	C421	*J2	C640	C3	C839	E4	C1132	*K5	C1327	*L5	C1538	*M2	CN300	G1	FB601	A1	IC702	*D4	IC1600	P2	R170	*D2	R366	J4	R500	*H1	R592	*F4	R718	C3	R942	B4	R1119	*K4
C138	*D2	C422	*H3	C641	B3	C912	C5	C1133	*K5	C1328	*L5	C1539	*N2	CN500	E1	FB602	A3	IC703	E3	IC1601	P1	R171	*D2	R367	J4	R501	*H1	R593	*E4	R719	*C4	R943	B4	R1120	*K4
C140	*D2	C423	*H3	C642	C3	C913	D5	C1134	*K5	C1329	*M5	C1540	*N2	CN600	B1	FB700	*C4	IC704	*D3	IC1602	N2	R172	*D2	R368	J4	R502	*H1	R594	*E4	R720	*D4	R944	B4	R1123	K4
C142	*D2	C424	*H3	C643	A3	C914	C5	C1135	*L5	C1330	L5	C1541	*N2	CN601	C1	FB701	*C4	IC750	A4	IC1603	P3	R173	*E1	R369	J4	R503	*H1	R595	*F4	R721	*C4	R945	C4	R1124	K4
C144	E1	C425	J2	C644	B3	C915	C5	C1136	K5	C1331	L4	C1542	*M2	CN1000	L1	FB702	*D3	IC805	*D4	IC1604	P3	R174	*E1	R370	J4	R504	*H1	R596	*F4	R722	*D3	R947	C4	R1125	*K4
C145	*F1	C426	H3	C645	B3	C916	D5	C1137	L5	C1332	*L5	C1543	*M2	CN1001	K1	FB703	*D4	IC806	*E4	IC1605	P3	R175	*E1	R371	J4	R505	*D5	R597	*F4	R723	*D3	R948	C4	R1126	*K4
C146	E1	C427	*H2	C646	C3	C917	D5	C1138	*K5	C1333	*L5	C1544	*M2			FB704	D4	IC807	*E4	IC1606	P2	R176	E2	R372	H4	R506	*E5	R598	*H5	R724	*D3	R949	*C4	R1127	*K3
C147	*E2	C428	*H2	C647	B2	C919	D5	C1139	*K5	C1334	*M5	C1545	*N3	D500	J1	FB705	C3	IC900	C4	IC1607	P3	R177	*D2	R373	H4	R507	*J1	R599	*E4	R725	D3	R950	*C4	R1128	*K3
C148	E2	C429	*H2	C648	C2	C921	D5	C1140	*L5	C1335	*M5	C1546	*N2	D501	J1	FB900	*D5	IC901	C5	IC1608	N3	R178	*D2	R374	H4	R508	*J1	R600	*B2	R726	D3	R951	*C4	R1129	*K3
C149	D2	C430	*H2	C649	B2	C922	D5	C1141	*L5	C1336	*L5	C1547	N2	D502	J1			IC902	C5	IC1609	P3	R179	*D2	R375	H4	R509	*J1	R601	*B2	R727	D3	R952	*C4	R1130	*K3
C200	*E3	C431	H2	C650	C2	C930	C4	C1142	K4	C1337	*L5	C1548	*M2	D600	D1	IC100	*A4	IC903	D5	IC1610	P1	R180	*D2	R376	H4	R510	F4	R602	*B2	R728	D3	R953	C4	R1131	*J3
C201	*F3	C432	*G2	C651	A2	C931	*C4	C1143	*L5	C1338	L5	C1549	M2	D601	D1	IC101	F2	IC904	C5	IC1611	P3	R181	*D2	R377	H4	R511	F4	R615	B2	R729	D3	R954	*C4	R1132	J3
C202	*E3	C500	F4	C652	*C3	C932	*C4	C1144	L5	C1339	L5	C1550	N3	D800	*D4	IC103	E2	IC905	C5	IC1612	P1	R182	*D2	R378	H3	R512	F4	R620	D1	R730	*D4	R955	*C4	R1133	*J3
C203	*F3	C501	*F4	C653	*A3	C933	*C4	C1145	*L5	C1340	L5	C1600	*P3	D801	*D4	IC104	E2	IC906	D5	IC1613	P2	R183	*D2	R379	H3	R513	F4	R622	D1	R731	C4	R956	*C4	R1134	K3
C204	*F3	C502	E5	C654	*B3	C934	*C4	C1146	*L5	C1341	M5	C1601	P3	D1000	*J3	IC105	*E2	IC1000	K2	IC1614	P2	R184	*F1	R380	H3	R514	F4	R624	D1	R732	D4	R957	*C4	R1135	*J3
C205	*G3	C503	E5	C655	*C3	C935	*C4	C1147	L4	C1342	M5	C1602	P4	D1100	*K5	IC106	*E1	IC1001	L1	IC1615	P2	R185	*F1	R381	H3	R515	F4	R626	D1	R733	D4	R958	*C4	R1136	*L2
C206	*E3	C504	D5	C656	A3	C936	*C4	C1148	*K4	C1343	M5	C1603	P3	D1101	*K5	IC107	*D2	IC1002	K1			R186	*F1	R382	H3	R516	F4	R635	*B2	R734	C4	R959	*C4	R1137	L2
C207	*F3	C505	D5	C657	*B3	C937	*C4	C1200	*P3	C1344	M5	C1604	*P1	D1102	*K5	IC108	E2	IC1003	*K1	L100	A5	R187	*F1	R383	J3	R517	F4	R641	C2	R735	C4	R960	B4	R1138	*J3
C208	*E3	C506	*G5	C658	*C3	C938	*C4	C1201	P4	C1345	M5	C1605	*P3	D1103	*K5	IC109	*F1	IC1005	M1	L101	A5	R188	*F1	R384	J3	R518	F4	R642	A2	R736	*E4	R961	B5	R1139	*L5
C209	*F3	C507	G5	C659	*C3	C939	*C4	C1202	P3	C1346	*N4	C1606	P3	D1104	J3	IC200	*E3	IC1006	K4	L102	D2	R189	E2	R385	J3	R519	*G4	R643	A2	R737	D3	R962	C4	R1140	*K5
C210	*E3	C508	*G5	C660	D3	C940	*C4	C1203	*P5	C1347	N4	C1607	*P2	D1105	J3	IC201	*F3	IC1008	L1	L103	B5	R190	E2	R386	J3	R520	*G4	R644	*B2	R738	*E3	R963	C5	R1141	*K5
C211	*F3	C509	*G5	C661	D2	C1000	*K3	C1204	*P5	C1348	N4	C1608	*P1	D1106	*K5	IC202	E3	IC1009	L2	L104	B4	R191	E2	R387	J3	R521	*F4	R645	A2	R739	*E3	R964	C5	R1142	*K5
C212	*E3	C510	*H4	C662	D2	C1001	K4	C1205	*P5	C1349	N4	C1609	*P3	D1107	*K5	IC203	F3	IC1010	K4	L600	A2	R192	F1	R388	J3	R522	*F4	R646	A2	R740	*E3	R965	C4	R1143	*K5
C213	*F3	C511	*H4	C700	*D4	C1002	K3	C1206	*P5	C1350	N4	C1610	*P3	D1108	*K5	IC204	*G3	IC1011	L4	L700	A3	R193	F1	R389	J3	R523	*F4	R647	C1	R741	*E4	R966	C4	R1144	*K5
C214	E3	C512	*G4	C701	A4	C1003	*L3	C1207	*P5	C1351	N4	C1611	P3	D1109	*K5	IC205	*F3	IC1012	L4			R194	E2	R390	H3	R524	*F4	R648	C1	R852	*D4	R967	C5	R1145	*K5
C215	F3	C513	*G4	C702	A4	C1004	*J2	C1208	*P5	C1352	*N4	C1612	P3	D1110	*L5	IC206	F3	IC1013	L4	Q100	*A1	R200	*F3	R400	*H1	R525	*D5	R649	C1	R853	D4	R968	C4	R1146	*L2
C216	E3	C514	*G4	C703	A4	C1005	*J2	C1209	*P3	C1353	*N4	C1613	*P2	D1200	*P3	IC207	G3	IC1014	L4	Q500	J1	R201	*G3	R401	*H1	R526	G5	R650	C1	R854	D4	R969	C4	R1147	*L2
C217	F3	C515	*G4	C704	A4	C1006	*K2	C1211	*P4	C1354	*N4	C1614	*P3	D1202	*P4	IC208	*F3	IC1101	*P5	Q501	J1	R202	F3	R402	*J5	R527	G5	R651	*B2	R855	E4	R970	C4	R1148	*L2
C218	F3	C516	*E4	C705	A4	C1007	*K2	C1212	*P4	C1355	*N4	C1615	*P3	D1203	*P4	IC209	F3	IC1102	P5	Q502	J1	R203	G3	R403	*J4	R528	G5	R652	C1	R856	*D4	R971	C4	R1149	*L2
C219	G3	C517	F4	C706	B4	C1008	*K2	C1213	P4	C1356	*N4	C1616	*P1	D1204	K3	IC210	*E3	IC1103	P5	Q600	D1	R204	*G3	R404	*J4	R529	G5	R653	C1	R857	*D4	R972	C4	R1150	*L2
C220	E3	C518	F4	C707	B3	C1009	*J3	C1214	P4	C1357	N4	C1617	N1	D1205	*P4	IC211	E3	IC1104	K5	Q601	D1	R205	*G3	R405	*J4	R530	G5	R654	C1	R858	*D4	R973	C4	R1151	*K5
C221	F3	C519	F4	C708	B3	C1010	*K3	C1215	P4	C1358	N4	C1618	*P3	D1206	*P4	IC212	H3	IC1105	K5	Q800	D4	R206	H4	R406	*J4	R531	*G4	R655	C1	R859	D4	R974	C4	R1152	*K5
C222	E3	C520	H4	C709	A4	C1011	*L3	C1216	P4	C1359	*N4	C1619	*P3	D1207	*P4	IC213	*H3	IC1106	K5	Q801	*D4	R207	*H3	R407	*J4	R532	*E5	R656	C1	R860	D4	R975	C4	R1153	*K5
C223	F3	C521	H4	C710	B3	C1012	*L2	C1218	*K1	C1360	*N4	C1620	P1	D1208	K4	IC214	G3	IC1107	K5	Q802	D4	R301	*G1	R408	*J4	R533	*E5	R657	C1	R861	D4	R976	C4	R1154	*K5
C224	E2	C522	H4	C711	A4	C1013	*J3	C1219	P4	C1361	*N4	C1621	*P3	D1209	L4	IC215	*G3	IC1108	K5	Q803	*D4	R302	*H3	R409	*J4	R534	*E5	R658	C1	R862	D4	R977	C4	R1155	*K5
C225	F2	C523	F4	C712	A4	C1014	*L3	C1220	*P5	C1362	N4	C1622	*P3	D1210	L3	IC300	*H3	IC1109	K4	Q1100	K5	R303	*H3	R410	*J4	R535	*D5	R659	C1	R863	D4	R978	C4	R1156	*K5
C226	E2	C524	H4	C713	A4	C1015	*L2	C1221	*P5	C1363	N4	C1623	*P3	D1211	K3	IC301	J4	IC1110	K4	Q1101	K5	R304	*H3	R411	*J4	R536	*D5	R660	C1	R864	*D4	R979	C4	R1157	*K5
C227	F2	C525	*F4	C714	*D3	C1016	*J2	C1222	*P5	C1364	N3	C1624	*P3	D1212	*K3	IC302	F5	IC1111	L2	Q1102	K5	R305	*H3	R412	*J4	R537	*E5	R661	C1	R865	*D4	R980	C4	R1158	*K5
C228	*G3	C526	F4	C715	*D3	C1017	*L2	C1223	*P5	C1365	N5	C1625	*P3	D1213	K3	IC303	F5	IC1112	K5	Q1103	K5	R306	*H4	R413	*J5	R538	*E5	R662	C1	R866	E4	R981	C4	R1159	*K4
C229	*G3	C527	F4	C716	D3	C1018	*K2	C1224	*K1	C1366	N5	C1626	*P3	D1214	*K3	IC304	G5	IC1113	K4	Q1104	K5	R307	J4	R414	*J4	R539	*E5	R663	*B2	R867	*D4	R982	C4	R1160	*K4
C230	F3	C528	H5	C717	*C4	C1019	*K2	C1225	*P4	C1367	*N5	C1627	*P1	D1215	*K3	IC305	H5	IC1114	K5	Q1105	K5	R308	H4	R415	*J4	R540	*E5	R664	C1	R868	*D4	R983	C4	R1163	*K5
C231	G3	C529	F5	C718	*C4	C1020	*J2	C1226	*P4	C1368	*N5	C1628	*P1	D1216	*K4	IC306	E5	IC1115	L5	Q1106	K5	R309	H4	R416	*J5	R541	*F4	R665	C1	R869	D4	R984	C4	R1164	*L5
C232	*F3	C530	*G4	C719	*C4	C1021	*J3	C1227	*P4	C1369	*N5	C1629	*P3	D1217	K4	IC307	F5	IC1116	K5	Q1107	L5	R310	H4	R417	*J5	R542	E5	R666	C1	R870	*D4	R985	C4	R1165	*K5
C233	F3	C531	*G5	C720	*C4	C1022	*K3	C1228	*K1	C1370	*N5	C1630	*P3	D1218	K4	IC308	G5	IC1117	L5	Q1108	L5	R311	H4	R418	*J5	R543	G5	R667	*D1	R871	*D4	R986	C4	R1166	*L5
C234	*E3	C532	*G4	C721	*D3	C1023	*L3	C1229	*K1	C1371	*N5	C1631	*P1	D1219	*K3	IC309	H5	IC1200	M3	Q1200	*L4	R312	J4	R419	H5	R544	*H4	R668	*D1	R872	D4	R987	C4	R1167	*K5
C235	E3	C533	*G4	C722	*D3	C1024	*J2	C1230	*K1	C1372	*N5	C1632	*P1	D1220	K3	IC311	G5	IC1201	P3	Q1201	*L4	R313	H3	R420	H5	R545	G5	R669	*B1	R873	E4	R988	C4	R1168	*K5
C236	*G3	C534	*G4	C723	*D4	C1025	*L2	C1231	*K1	C1373	*N5	C1633	P2	D1221	K4	IC312	J5	IC1202	P4	Q1202	*P1	R315	J3	R421	H5	R546	*E5	R670	*B1	R874	D4	R989	C4	R1169	*K5
C237	H4	C535	*G4	C724	*D4	C1026	*L2	C1232	L4	C1374	*N5	C1634	P2	D1222	*K4	IC400	H2	IC1203	P5	Q1203	M3	R316	J3	R422	H5	R547	E5	R671	*B1	R875	D4	R990	C4	R1170	*K5
C238	*H3	C536	*G4	C725	C4	C1027	*K2	C1233	L4	C1375	N5	C1635	*P2	D1223	*K4	IC401	J4	IC1204	P5	Q1204	*P1	R317	J4	R423	H5	R548	H5	R672	*C1	R876	D4	R991	C4	R1171	*K5
C239	G3	C537	*G4	C726	D4	C1028	K1	C1234	L4	C1376	N5	C1636	*P2	D1224	M3	IC402	J5	IC1205	P4	Q1205	*M3	R318	J4	R424	H5	R549	H5	R673	A1	R877	*D4	R992	C4	R1172	*K5
C301	*H3	C538	*G4	C727	*D4	C1029	K2	C1235	K4	C1377	N5	C1637	*P1	D1225	P1	IC403	*H1	IC1206	*K1	Q1206	*P1	R319	J4	R425	J3	R550	H4	R674	A2	R878	*E4	R993	B4	R1173	K4
C302	*J4	C539	*G4	C728	*C4	C1030	K2	C1236	P4	C1378	N5	C1638	*P1	D1226	P1	IC404	*J5	IC1207	P4	Q1300	*N3	R320	J4	R426	J2	R551	H4	R676	A2	R879	*D4	R994	B4	R1174	K4
C303	*J4	C540	*G4	C729	*C4	C1031	K1	C1237	P4	C1379	N5	C1639	*N2	D1227	P1	IC405	*H2	IC1208	L4	Q1600	*P3	R321	J4	R427	J2	R552	G5	R677	*C1	R880	*D4	R995	B4	R1175	*L5
C304	*J4	C541	*G4	C730	*D4	C1032	*L1	C1238	*L4	C1380	N5	C1640	*P2	D1228	*M3	IC406	*J5	IC1209	M3	Q1601	*P3	R322	J4	R428	J3	R553	H5	R678	A2	R881	*E4	R996	B4	R1176	*L5
C305	*J4	C600	B2	C731	*D4	C1033	*L1	C1239	*L4	C1500	N2	C1641	*P2	D1300	*N4	IC407	J4	IC1210	J2			R323	J4	R429	J2	R554	H5	R679	*C1	R882	*E4	R997	B4	R1177	*L5
C306	*J3	C601	B2	C732	*D4	C1034	L4	C1240	*K3	C1501	*N2	C1642	*P2	D1500	*M2	IC408	J5	IC1300	N3	R100	*E2	R324	J4	R430	J2	R555	H4	R680	*C1	R883	*E4	R998	B4	R1178	*L5
C307	*H3	C602	B2	C733	*D4	C1035	L4	C1241	K3	C1502	N2	C1643	*N2	D1501	*M2	IC409	J5	IC1301	M5	R101	*E2	R325	J4	R431	J2	R556	H4	R681	*C1	R884	*E4	R1000	J3	R1181	*L4

R1182	*L4	R1325	*M5	R1417	*N5	R1576	*N2	R5020	*F4	RB922	*C5
R1183	*L4	R1326	*L5	R1418	*N5	R1577	*M2	R5021	*F4	RB924	*D5
R1184	J3	R1327	*M5	R1419	*N5	R1578	*M2	R5022	*H4	RB925	*D5
R1185	J3	R1328	*M5	R1420	*N5	R1579	*N2	R5023	F4	RB928	*C5
R1186	*J3	R1329	*M5	R1421	*N5	R1580	*M2	R5024	F4	RB929	*C5
R1187	J3	R1330	*M5	R1422	*N5	R1581	*N2			RB937	*C4
R1188	J3	R1331	*L5	R1423	*N5	R1582	*M2	RB103	E2	RB938	*C5
R1189	*J3	R1332	*M5	R1424	*N5	R1583	*N2	RB104	E2	RB939	*C5
R1200	P3	R1333	*L5	R1425	*N5	R1584	*M2	RB105	*E2	RB940	*C4
R1202	*P5	R1334	*M5	R1426	*N5	R1600	*P1	RB106	*F2	RB941	*C5
R1203	*P5	R1335	*M5	R1427	*N5	R1601	*P1	RB107	*F2	RB942	*C5
R1204	*P5	R1336	*M5	R1428	*N5	R1602	P3	RB108	F2	RB943	B4
R1205	*P5	R1337	*M5	R1429	*N5	R1603	P4	RB109	F2	RB947	*B4
R1206	P3	R1338	*M5	R1430	*N5	R1604	*P1	RB110	F2	RB948	C4
R1208	*P5	R1339	*L5	R1431	*N5	R1605	*P1	RB111	F2	RB949	C4
R1209	*P5	R1340	*L5	R1432	*N5	R1606	*P1	RB112	F2	RB1000	*P1
R1210	*P5	R1341	*M5	R1500	*N3	R1607	*P2	RB113	F2	RB1002	*M1
R1211	*P5	R1342	*M5	R1501	*N3	R1608	*N3	RB114	F2	RB1004	N1
R1212	*P3	R1343	*L5	R1502	*N3	R1609	*P3	RB115	F2	RB1005	*L1
R1214	*P4	R1344	*M5	R1503	*N3	R1610	*N3	RB116	*H1	RB1006	M1
R1215	*P4	R1345	*L5	R1504	*N3	R1611	*P3	RB117	*G1	RB1007	M1
R1216	*P4	R1346	*L5	R1505	*N3	R1612	*N3	RB118	H1	RB1008	L1
R1217	*P4	R1347	*M5	R1506	*N3	R1613	*P3	RB119	H1	RB1009	*M1
R1218	*K1	R1348	*L5	R1507	N2	R1614	*P3	RB120	*E2	RB1010	*M1
R1219	P4	R1349	*L5	R1508	N2	R1615	*N3	RB121	*E2	RB1011	*M1
R1220	*K1	R1350	*M5	R1509	M2	R1616	*P3	RB301	*J4	RB1012	*M1
R1221	P4	R1351	*L5	R1510	M2	R1617	*P3	RB302	H4	RB1013	*M1
R1222	P4	R1352	*L5	R1511	*N2	R1618	*P3	RB303	H4	RB1014	*L1
R1223	P4	R1353	*M5	R1512	*M2	R1619	*P3	RB304	*J3	RB1015	*L1
R1224	P4	R1354	*L5	R1513	N2	R1620	*P3	RB305	*J3	RB1016	L1
R1225	P4	R1355	*L5	R1514	M2	R1621	*P3	RB306	*J4	RB1017	L1
R1226	*P4	R1356	*M5	R1515	*N2	R1622	*P1	RB307	*H3	RB1200	*P1
R1227	*K1	R1357	*M5	R1516	*M2	R1623	*P3	RB308	*F5		
R1228	*P4	R1358	*L5	R1517	*N2	R1624	*P3	RB309	*F5	RV1200	N1
R1229	*P4	R1359	*L5	R1518	*M2	R1625	*P1	RB310	*F5		
R1230	*P4	R1360	*N4	R1519	*N2	R1626	*P3	RB311	*G5	S100	G1
R1231	*K1	R1361	*N4	R1520	*M2	R1627	*P3	RB312	*G5	S101	H1
R1232	*K1	R1362	*N4	R1521	M2	R1628	*P1	RB313	*G5	S102	A1
R1233	L4	R1363	*N4	R1522	M2	R1629	P3	RB317	*E5	S600	A1
R1234	K4	R1364	*N4	R1523	*N2	R1630	P3	RB318	*F5	S601	A1
R1235	*L4	R1365	*N4	R1524	*M2	R1631	P3	RB319	*F5	S1000	P1
R1236	*L4	R1366	*N4	R1525	*N2	R1632	P3	RB320	*F5	S1200	N1
R1237	*L4	R1367	*N4	R1526	*N2	R1633	P3	RB321	*G5	S1201	N1
R1238	*P4	R1368	*N4	R1527	*M2	R1634	P3	RB322	*G5		
R1239	*K4	R1369	*N4	R1528	*M2	R1635	N1	RB323	*H5	TP100	A1
R1240	*L4	R1370	*N4	R1529	*N2	R1636	N1	RB324	*H5	TP400	J5
R1241	*K3	R1371	*N4	R1530	*N2	R1637	*P3	RB325	*J5	TP401	J4
R1242	*K3	R1372	N4	R1531	*M2	R1638	*P3	RB326	*J5	TP402	H2
R1243	*N1	R1373	N4	R1532	*M2	R1639	*P1	RB328	*H5	TP500	G4
R1244	*N1	R1374	*N4	R1533	*N2	R1640	*P1	RB329	*H5	TP501	G3
R1245	M3	R1375	*N4	R1534	*M2	R1641	*P1	RB332	*E5	TP502	G1
R1246	*P1	R1376	N4	R1535	*N2	R1642	*P1	RB333	*F5	TP503	H1
R1247	*M3	R1377	N4	R1536	M2	R1643	*P1	RB334	*F5	TP504	H1
R1248	*M3	R1378	*N4	R1537	N2	R1644	*P1	RB335	*F5	TP505	H1
R1249	*M3	R1379	N4	R1538	N2	R1645	P2	RB336	*G5	TP506	H1
R1250	*P1	R1380	*N4	R1539	M2	R1646	P2	RB337	*G5	TP507	H1
R1251	*M3	R1381	*N4	R1540	M2	R1647	N2	RB400	*H2	TP508	G4
R1252	*P1	R1382	*N4	R1541	*M2	R1648	P2	RB500	*E5	TP509	G3
R1253	*M3	R1383	*N4	R1542	M2	R1649	*P2	RB501	*E5	TP510	F4
R1254	*M3	R1384	*N4	R1543	*M2	R1650	*P2	RB502	*D5	TP511	F4
R1255	*L1	R1385	*N4	R1544	*N2	R1651	*P2	RB505	*F4	TP600	D1
R1256	*L1	R1386	*N4	R1545	M2	R1652	*P2	RB506	H4	TP601	D1
R1257	*M3	R1387	*N4	R1546	*N2	R1653	*P2	RB507	*F4	TP602	D1
R1258	M3	R1388	*N4	R1547	M2	R1654	*P2	RB508	H4	TP603	D1
R1259	M3	R1389	*N4	R1548	*M2	R1655	*P2	RB509	F4	TP700	D4
R1260	N1	R1390	*N4	R1549	*N2	R1656	*P2	RB510	H4	TP701	D3
R1261	K1	R1391	*N4	R1550	*M2	R1657	*P2	RB511	H4	TP703	D4
R1300	*M4	R1392	*N4	R1551	N2	R1658	*P2	RB602	A2	TP704	D4
R1301	*M4	R1393	*N4	R1552	M2	R1659	*P2	RB603	A2	TP705	D4
R1302	*M4	R1394	*N4	R1553	M2	R1660	*P2	RB604	*B2	TP706	C4
R1303	*M4	R1395	*N4	R1554	*N2	R1661	*P2	RB605	*B2	TP800	D4
R1304	*N3	R1396	*N4	R1555	*N2	R1662	*N2	RB607	*B2	TP801	D4
R1305	*N3	R1397	*N4	R1556	M2	R5000	*G4	RB608	A2	TP1000	M1
R1306	*N3	R1398	*N4	R1557	*M2	R5001	F4	RB609	C2	TP1001	M1
R1307	M4	R1399	*N4	R1558	*M2	R5002	*G4	RB610	C2	TP1100	K3
R1308	*N3	R1400	*N4	R1559	*M2	R5003	*G4	RB611	C2	TP1101	K3
R1309	M4	R1401	*N5	R1560	*N2	R5004	*F4	RB612	C2	TP1102	L2
R1310	*N3	R1402	*N5	R1561	*N2	R5005	*G4	RB613	C2	TP1104	L2
R1311	*N3	R1403	*N5	R1562	*M2	R5006	*E4	RB614	C2	TP1105	M1
R1312	*L4	R1404	*N5	R1563	N2	R5007	*E4	RB615	C2	TP1106	L2
R1313	M4	R1405	*N5	R1564	*N2	R5008	*F4	RB616	C2	TP1107	N1
R1314	*L4	R1406	*N5	R1565	*N2	R5009	*E4	RB617	*A1	TP1200	P4
R1315	M4	R1407	*N5	R1566	M2	R5010	*E4	RB618	*A1	TP1201	P4
R1316	*L4	R1408	*N5	R1567	*M2	R5011	*F4	RB619	*A1	TP1202	P4
R1317	*L4	R1409	*N5	R1568	*M2	R5012	*F4	RB620	*A1	TP1203	P4
R1318	*L4	R1410	*N5	R1569	*N2	R5013	F4	RB915	*C5	TP1204	L1
R1319	*L4	R1411	*N5	R1570	*M2	R5014	F4	RB916	*C5	TP1205	L1
R1320	*L4	R1412	*N5	R1571	N2	R5015	F4	RB917	*D5	TP1206	M3
R1321	*L4	R1413	*N5	R1572	M2	R5016	*E4	RB918	*D5	TP1207	K1
R1322	*L4	R1414	*N5	R1573	N2	R5017	*E4	RB919	*C5	TP1300	L5
R1323	*M5	R1415	*N5	R1574	M2	R5018	F4	RB920	*C5	TP1301	L5
R1324	*M5	R1416	*N5	R1575	*N2	R5019	*F4	RB921	*C5	TP1302	M5

TP1303	M5		
TP1304	N3		
TP1305	N3		
TP1306	N4		
TP1307	N4		
TP1308	N4		
TP1309	P4		
TP1500	N2		
TP1501	M2		
TP1502	N2		
TP1503	M2		
TP1600	N3		
TP1601	P3		
TP1602	P2		
TP1603	P2		
TP1604	P2		
TP1605	P2		
TP1606	P2		
TP1607	P2		
X101	E1		
X400	J1		
X401	H3		
X600	A1		
X700	*D3		
X1000	K3		

*:B SIDE

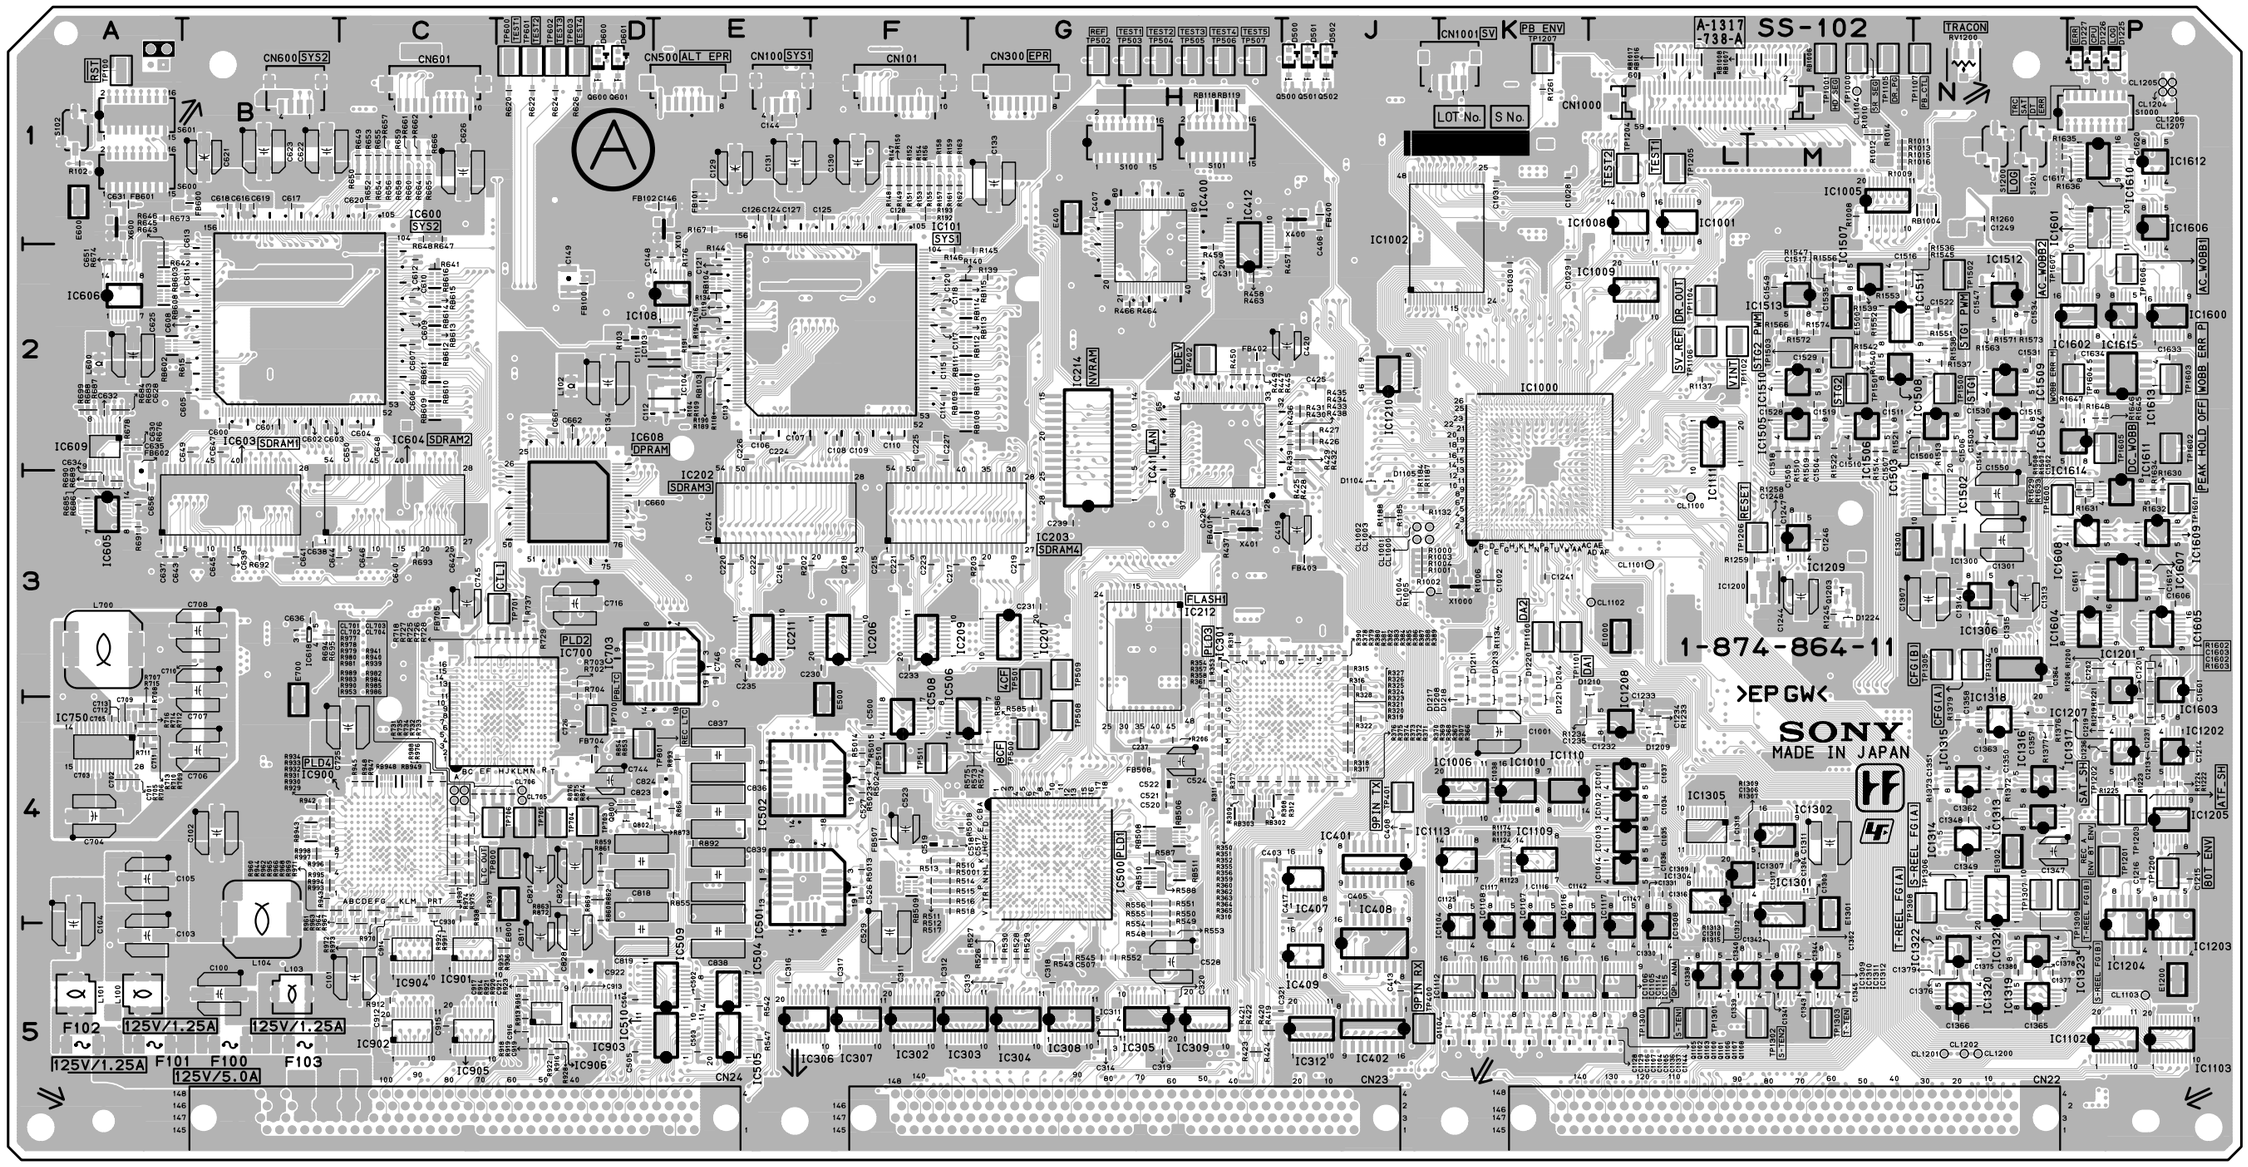

SS-102 -A SIDE-
SUFFIX: -11

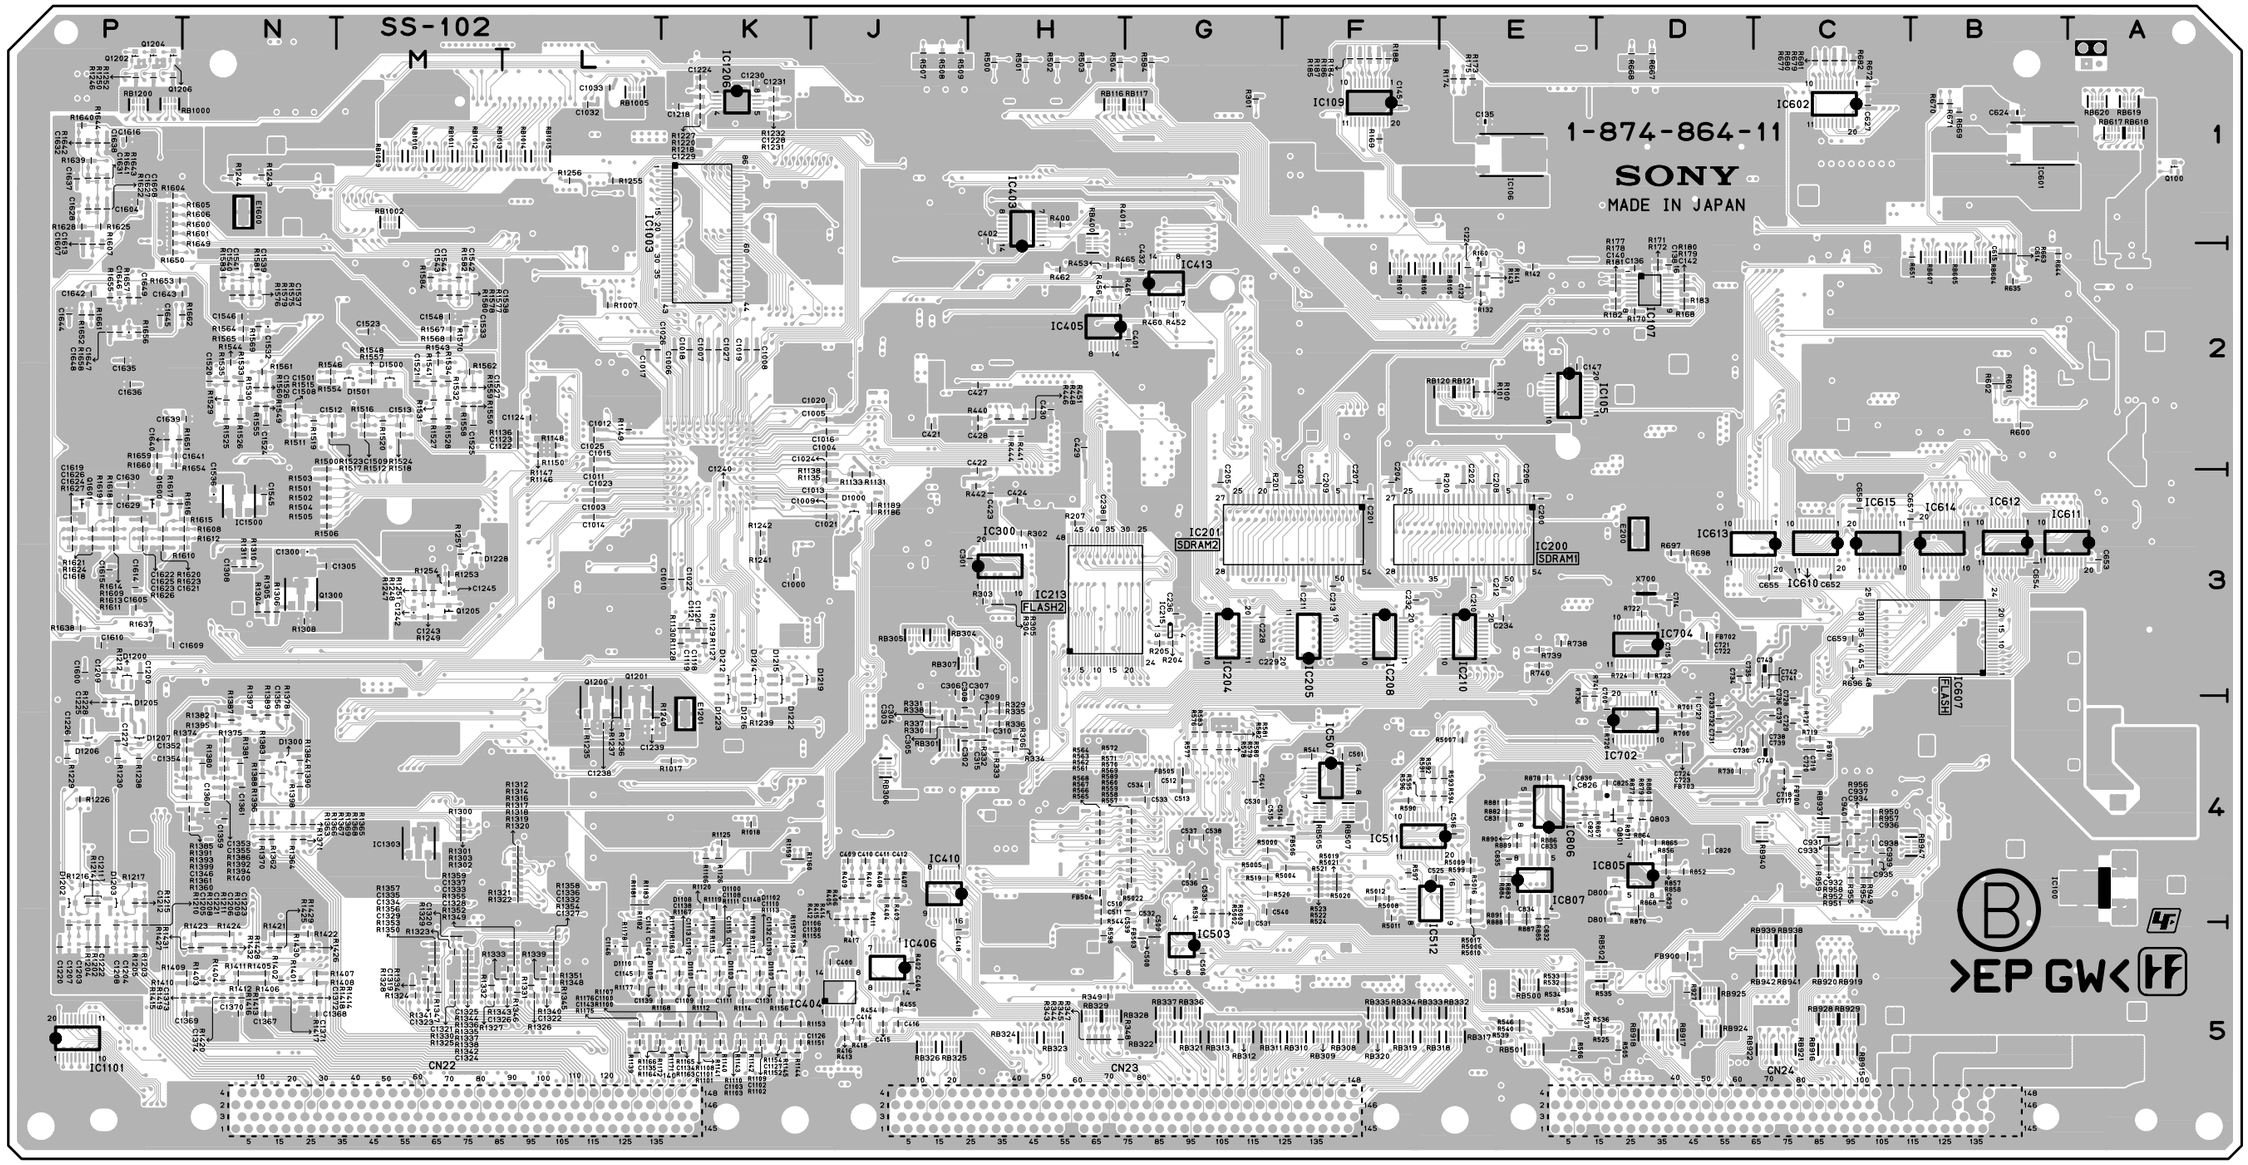

SS-102 -B SIDE-
SUFFIX: -11

SS-102 (1-874-864-12)

C100	B5	C308	*J4	C603	B2	C734	*D3	C1036	L4	C1242	*M3	C1503	N2	C1644	*P2	D1501	*M2	IC409	J5	IC1301	M5	R101	*E2	R325	J4	R431	J2	R556	H4	R681	*C1	R884	*E4	R1000	J3
C101	C5	C309	*H4	C604	C2	C735	*D3	C1037	L4	C1243	*M3	C1504	M2	C1645	*P2			IC410	*J4	IC1302	M4	R102	A1	R326	J3	R432	J2	R557	*G4	R682	*C1	R885	*E4	R1001	J3
C102	B4	C310	*H4	C605	B2	C736	*C4	C1038	K4	C1244	M3	C1505	M2	C1646	*P2	E200	*D3	IC411	H2	IC1303	*M4	R103	D2	R327	J3	R433	J2	R558	*G4	R683	A2	R886	*E4	R1002	J3
C103	A5	C311	F5	C606	C2	C737	*C4	C1100	*K5	C1245	*M3	C1506	N2	C1647	*P2	E400	G1	IC412	H2	IC1304	L4	R104	E2	R328	J3	R434	J2	R559	*G4	R684	A2	R887	*E5	R1003	J3
C104	A5	C312	F5	C607	C2	C738	*C4	C1101	*K5	C1246	M3	C1507	M2	C1648	*P2	E500	F4	IC413	*G2	IC1305	L4	R109	E2	R329	*H4	R435	J2	R560	*G4	R685	A3	R888	*E5	R1004	J3
C105	A4	C313	G5	C608	B2	C739	*C4	C1102	*K5	C1247	M3	C1508	*N2	C1649	*P2	E600	A1	IC500	G4	IC1306	N3	R118	E2	R330	*J4	R436	J2	R561	*H4	R686	A3	R889	*E4	R1005	J3
C106	E2	C314	G5	C609	C2	C740	*C4	C1103	*K5	C1248	M3	C1509	*M2			E700	B4	IC501	E4	IC1307	L4	R132	*E2	R331	*J4	R437	H3	R562	*H4	R687	A2	R890	*E4	R1006	K3
C107	E2	C315	*H4	C610	C2	C741	*C3	C1104	K5	C1249	N1	C1510	M2	CL701	C4	E800	D4	IC502	E4	IC1308	L5	R134	E2	R332	*H4	R438	J2	R563	*H4	R688	A2	R891	*E4	R1007	*L2
C108	F2	C316	E5	C611	B2	C742	*C3	C1105	K5	C1300	*N3	C1511	M2	CL702	C4	E1000	L3	IC503	*G5	IC1309	L5	R139	G2	R333	*H4	R439	J2	R564	*H4	R689	A3	R892	E4	R1008	M1
C109	F2	C317	F5	C612	C2	C743	*C3	C1106	K5	C1301	N3	C1512	*N2	CL703	C4	E1200	P5	IC504	E5	IC1310	L5	R140	F2	R334	*H4	R440	*H2	R565	*H4	R690	A3	R893	E4	R1009	M1
C110	F2	C318	G5	C613	B2	C744	D4	C1107	K5	C1302	M5	C1513	*M2	CL704	C4	E1201	*K4	IC505	E5	IC1311	M5	R141	*E2	R335	*H4	R441	*H2	R566	*H4	R691	A3	R912	C5	R1010	M1
C111	D2	C319	H5	C614	*B2	C745	C3	C1108	*K5	C1303	M4	C1514	N2	CL705	D4	E1300	M3	IC506	G4	IC1312	M5	R142	*E2	R336	*H4	R442	*H3	R567	*H4	R692	B3	R913	D5	R1011	M1
C112	D2	C320	H5	C615	*B2	C746	E3	C1109	*K5	C1304	M4	C1515	N2	CL706	D4	E1301	M4	IC507	*F4	IC1313	N4	R143	*E2	R337	*J4	R443	H3	R568	*H4	R693	C3	R914	D5	R1012	M1
C113	E2	C321	H5	C616	B1	C817	D5	C1110	*K5	C1305	*N3	C1516	M2	CL1000	J3	E1302	N4	IC508	F4	IC1314	N4	R144	E2	R338	*J4	R444	*H2	R569	*G4	R694	B3	R915	D5	R1013	M1
C114	F2	C400	*J5	C617	B1	C818	D4	C1111	*K5	C1306	M4	C1517	M2	CL1001	J3	E1500	M2	IC509	E5	IC1315	N4	R145	G2	R343	*H5	R445	H2	R570	*G4	R695	B3	R916	D5	R1014	M1
C115	F2	C401	*G2	C618	B1	C819	D5	C1112	*K5	C1307	N3	C1518	M2	CL1002	J3	E1600	*N1	IC510	E5	IC1316	N4	R146	F2	R344	*H5	R446	*H2	R571	*G4	R696	*C3	R918	D5	R1015	M1
C116	E2	C402	*H1	C619	B1	C820	*D4	C1113	*K5	C1308	*N3	C1519	M2	CL1003	J3			IC511	*E4	IC1317	N4	R147	F1	R345	*H5	R447	H2	R572	*G4	R697	*D3	R919	D5	R1016	M1
C117	F2	C403	H4	C620	C1	C821	D4	C1114	*K5	C1309	L4	C1520	*N2	CL1004	J3	F100	B5	IC512	*F4	IC1318	N3	R148	F1	R347	*H5	R448	*H2	R573	G4	R698	*D3	R920	D5	R1017	*K4
C118	F2	C404	*J5	C621	B1	C822	D4	C1115	*K5	C1310	M4	C1521	*M2	CL1100	L3	F101	A5	IC600	B2	IC1319	N5	R149	F1	R348	*H5	R449	H2	R574	G4	R699	A2	R921	D5	R1018	*K4
C119	E2	C405	J4	C622	B1	C823	E4	C1116	K4	C1311	M4	C1522	N2	CL1101	L3	F102	A5	IC601	*B1	IC1320	N5	R150	F1	R349	*H5	R450	H2	R575	F4	R700	*D4	R922	D5	R1100	*K5
C120	F2	C406	J1	C623	B1	C824	E4	C1117	K4	C1312	L4	C1523	*M2	CL1102	L3	F103	B5	IC602	*C1	IC1321	N4	R151	F1	R350	H3	R451	*H2	R576	*G4	R701	*D4	R923	D5	R1101	*K5
C121	E2	C407	G1	C624	*B1	C825	*D4	C1118	*K3	C1313	N3	C1524	*N2	CL1103	P5			IC603	B3	IC1322	N5	R152	F1	R351	H3	R452	*G2	R577	*G4	R702	D3	R927	*D5	R1102	*K5
C122	*E2	C408	J4	C625	A2	C826	*D4	C1119	*K3	C1314	N3	C1525	*M2	CL1104	M1	FB100	D2	IC604	C3	IC1323	N5	R153	F1	R352	H3	R453	*H2	R578	*G4	R703	D3	R928	D5	R1103	*K5
C123	*E2	C409	*J4	C626	C1	C827	*E4	C1120	*K3	C1315	N3	C1526	*N2	CL1200	N5	FB101	E1	IC605	A3	IC1500	*N3	R154	F1	R353	H3	R454	*J5	R579	*G4	R704	D3	R929	B4	R1106	*K4
C124	E1	C410	*J4	C627	*C1	C828	D5	C1121	*K3	C1316	L4	C1527	*M2	CL1201	N5	FB102	E1	IC606	A2	IC1502	N3	R155	F1	R354	H3	R455	*J5	R580	*G4	R705	A4	R930	B4	R1107	*K5
C125	F1	C411	*J4	C628	A2	C829	*D4	C1122	*L2	C1317	M4	C1528	M2	CL1202	N5	FB400	J1	IC607	*B3	IC1503	N2	R156	F1	R355	H4	R456	*H2	R581	*G4	R706	A4	R931	B4	R1108	*K5
C126	E1	C412	*J4	C630	A2	C830	*E4	C1123	*L2	C1318	L4	C1529	M2	CL1204	P1	FB401	H3	IC608	D3	IC1504	N2	R157	F1	R356	H4	R457	J2	R582	*G4	R707	A4	R932	B4	R1109	*K5
C127	E1	C413	J5	C631	A1	C831	*E4	C1124	*L2	C1319	*M5	C1530	N2	CL1205	P1	FB402	H2	IC609	A2	IC1505	M2	R158	F1	R357	H4	R458	H2	R583	*G4	R708	A4	R933	B4	R1110	*K5
C128	F1	C414	*J5	C632	A2	C832	*E4	C1125	K4	C1320	*M5	C1531	N2	CL1206	P1	FB403	J3	IC610	*C3	IC1506	M2	R159	F1	R358	H4	R459	H2	R584	*G1	R709	A4	R934	B4	R1111	*K5
C129	E1	C415	*J5	C634	A3	C833	*E4	C1126	*K5	C1321	*M5	C1532	*N2	CL1207	P1	FB503	*G5	IC611	*A3	IC1507	M2	R160	*E2	R359	H4	R460	*G2	R585	G4	R710	A4	R935	D5	R1112	*K5
C130	F1	C416	*J5	C635	A3	C834	*E4	C1127	*K5	C1322	*L5	C1533	*M2			FB504	*H4	IC612	*B3	IC1508	N2	R161	F1	R360	H4	R461	*H2	R586	G4	R711	A4	R936	D5	R1113	*K5
C131	E1	C417	J4	C636	B3	C835	*E4	C1128	K5	C1323	*M5	C1534	N2	CN22	M5	FB505	*G4	IC613	*C3	IC1509	N2	R162	F1	R361	H4	R462	*H2	R587	H4	R712	A4	R937	C4	R1114	*K5
C133	G1	C418	*J5	C637	A3	C836	E4	C1129	K5	C1324	*M5	C1535	M2	CN23	G5	FB506	*F4	IC614	*B3	IC1510	M2	R163	F1	R362	H4	R463	H2	R588	H4	R713	A4	R938	C4	R1115	*K5
C134	D2	C419	J3	C638	B3	C837	E4	C1130	*K5	C1325	*M5	C1536	*N3	CN24	C5	FB507	F4	IC615	*C3	IC1511	M2	R167	E1	R363	H4	R464	H2	R589	*G4	R714	A4	R939	C4	R1116	*K5
C135	*E1	C420	J2	C639	B3	C838	E5	C1131	*K5	C1326	*L5	C1537	*N2	CN100	E1	FB508	H4	IC618	B3	IC1512	N2	R168	*D2	R364	H4	R465	*H2	R590	*F4	R715	A4	R940	C4	R1117	*K5
C136	*D2	C421	*J2	C640	C3	C839	E4	C1132	*K5	C1327	*L5	C1538	*M2	CN101	F1	FB600	B1	IC700	D4	IC1513	M2	R169	*F1	R365	H4	R466	H2	R591	*F4	R716	A4	R941	C4	R1118	*K5
C138	*D2	C422	*H3	C641	B3	C912	C5	C1133	*K5	C1328	*L5	C1539	*N2	CN300	G1	FB601	A1	IC702	*D4	IC1600	P2	R170	*D2	R366	J4	R500	*H1	R592	*F4	R718	C3	R942	B4	R1119	*K4
C140	*D2	C423	*H3	C642	C3	C913	D5	C1134	*K5	C1329	*M5	C1540	*N2	CN500	E1	FB602	A3	IC703	E3	IC1601	P1	R171	*D2	R367	J4	R501	*H1	R593	*E4	R719	*C4	R943	B4	R1120	*K4
C142	*D2	C424	*H3	C643	A3	C914	C5	C1135	*L5	C1330	L5	C1541	*N2	CN600	B1	FB700	*C4	IC704	*D3	IC1602	N2	R172	*D2	R368	J4	R502	*H1	R594	*E4	R720	*D4	R944	B4	R1123	K4
C144	E1	C425	J2	C644	B3	C915	C5	C1136	K5	C1331	L4	C1542	*M2	CN601	C1	FB701	*C4	IC750	A4	IC1603	P3	R173	*E1	R369	J4	R503	*H1	R595	*F4	R721	*C4	R945	C4	R1124	K4
C145	*F1	C426	H3	C645	B3	C916	D5	C1137	L5	C1332	*L5	C1543	*M2	CN1000	L1	FB702	*D3	IC805	*D4	IC1604	P3	R174	*E1	R370	J4	R504	*H1	R596	*F4	R722	*D3	R947	C4	R1125	*K4
C146	E1	C427	*H2	C646	C3	C917	D5	C1138	*K5	C1333	*L5	C1544	*M2	CN1001	K1	FB703	*D4	IC806	*E4	IC1605	P3	R175	*E1	R371	J4	R505	*D5	R597	*F4	R723	*D3	R948	C4	R1126	*K4
C147	*E2	C428	*H2	C647	B2	C919	D5	C1139	*K5	C1334	*M5	C1545	*N3			FB704	D4	IC807	*E4	IC1606	P2	R176	E2	R372	H4	R506	*E5	R598	*H5	R724	*D3	R949	*C4	R1127	*K3
C148	E2	C429	*H2	C648	C2	C921	D5	C1140	*L5	C1335	*M5	C1546	*N2	D500	J1	FB705	C3	IC900	C4	IC1607	P3	R177	*D2	R373	H4	R507	*J1	R599	*E4	R725	D3	R950	*C4	R1128	*K3
C149	D2	C430	*H2	C649	B2	C922	D5	C1141	*L5	C1336	*L5	C1547	N2	D501	J1	FB900	*D5	IC901	C5	IC1608	N3	R178	*D2	R374	H4	R508	*J1	R600	*B2	R726	D3	R951	*C4	R1129	*K3
C200	*E3	C431	H2	C650	C2	C930	C4	C1142	K4	C1337	*L5	C1548	*M2	D502	J1			IC902	C5	IC1609	P3	R179	*D2	R375	H4	R509	*J1	R601	*B2	R727	D3	R952	*C4	R1130	*K3
C201	*F3	C432	*G2	C651	A2	C931	*C4	C1143	*L5	C1338	L5	C1549	M2	D600	D1	IC100	*A4	IC903	D5	IC1610	P1	R180	*D2	R376	H4	R510	F4	R602	*B2	R728	D3	R953	C4	R1131	*J3
C202	*E3	C500	F4	C652	*C3	C932	*C4	C1144	L5	C1339	L5	C1550	N3	D601	D1	IC101	F2	IC904	C5	IC1611	P3	R181	*D2	R377	H4	R511	F4	R615	B2	R729	D3	R954	*C4	R1132	J3
C203	*F3	C501	*F4	C653	*A3	C933	*C4	C1145	*L5	C1340	L5	C1600	*P3	D800	*D4	IC103	E2	IC905	C5	IC1612	P1	R182	*D2	R378	H3	R512	F4	R620	D1	R730	*D4	R955	*C4	R1133	*J3
C204	*F3	C502	E5	C654	*B3	C934	*C4	C1146	*L5	C1341	M5	C1601	P3	D801	*D4	IC104	E2	IC906	D5	IC1613	P2	R183	*D2	R379	H3	R513	F4	R622	D1	R731	C4	R956	*C4	R1134	K3
C205	*G3	C503	E5	C655	*C3	C935	*C4	C1147	L4	C1342	M5	C1602	P4	D1000	*J3	IC105	*E2	IC1000	K2	IC1614	P2	R184	*F1	R380	H3	R514	F4	R624	D1	R732	D4	R957	*C4	R1135	*J3
C206	*E3	C504	D5	C656	A3	C936	*C4	C1148	*K4	C1343	M5	C1603	P3	D1100	*K5	IC106	*E1	IC1001	L1	IC1615	P2	R185	*F1	R381	H3	R515	F4	R626	D1	R733	D4	R958	*C4	R1136	*L2
C207	*F3	C505	D5	C657	*B3	C937	*C4	C1200	*P3	C1344	M5	C1604	*P1	D1101	*K5	IC107	*D2	IC1002	K1			R186	*F1	R382	H3	R516	F4	R635	*B2	R734	C4	R959	*C4	R1137	L2
C208	*E3	C506	*G5	C658	*C3	C938	*C4	C1201	P4	C1345	M5	C1605	*P3	D1102	*K5	IC108	E2	IC1003	*K1	L100	A5	R187	*F1	R383	J3	R517	F4	R641	C2	R735	C4	R960	B4	R1138	*J3
C209	*F3	C507	G5	C659	*C3	C939	*C4	C1202	P3	C1346	*N4	C1606	P3	D1103	*K5	IC109	*F1	IC1005	M1	L101	A5	R188	*F1	R384	J3	R518	F4	R642	A2	R736	*E4	R961	B5	R1139	*L5
C210	*E3	C508	*G5	C660	D3	C940	*C4	C1203	*P5	C1347	N4	C1607	*P2	D1104	J3	IC200	*E3	IC1006	K4	L102	D2	R189	E2	R385	J3	R519	*G4	R643	A2	R737	D3	R962	C4	R1140	*K5
C211	*F3	C509	*G5	C661	D2	C1000	*K3	C1204	*P5	C1348	N4	C1608	*P1	D1105	J3	IC201	*F3	IC1008	L1	L103	B5	R190	E2	R386	J3	R520	*G4	R644	*B2	R738	*E3	R963	C5	R1141	*K5
C212	*E3	C510	*H4	C662	D2	C1001	K4	C1205	*P5	C1349	N4	C1609	*P3	D1106	*K5	IC202	E3	IC1009	L2	L104	B4	R191	E2	R387	J3	R521	*F4	R645	A2	R739	*E3	R964	C5	R1142	*K5
C213	*F3	C511	*H4	C700	*D4	C1002	K3	C1206	*P5	C1350	N4	C1610	*P3	D1107	*K5	IC203	F3	IC1010	K4	L600	A2	R192	F1	R388	J3	R522	*F4	R646	A2	R740	*E3	R965	C4	R1143	*K5
C214	E3	C512	*G4	C701	A4	C1003	*L3	C1207	*P5	C1351	N4	C1611	P3	D1108	*K5	IC204	*G3	IC1011	L4	L700	A3	R193	F1	R389	J3	R523	*F4	R647	C1	R741	*E4	R966	C4	R1144	*K5
C215	F3	C513	*G4	C702	A4	C1004	*J2	C1208	*P5	C1352	*N4	C1612	P3	D1109	*K5	IC205	*F3	IC1012	L4			R194	E2	R390	H3	R524	*F4	R648	C1	R852	*D4	R967	C5	R1145	*K5
C216	E3	C514	*G4	C703	A4	C1005	*J2	C1209	*P3	C1353	*N4	C1613	*P2	D1110	*L5	IC206	F3	IC1013	L4	Q100	*A1	R200	*F3	R400	*H1	R525	*D5	R649	C1	R853	D4	R968	C4	R1146	*L2
C217	F3	C515	*G4	C704	A4	C1006	*K2	C1211	*P4	C1354	*N4	C1614	*P3	D1200	*P3	IC207	G3	IC1014	L4	Q500	J1	R201	*G3	R401	*H1	R526	G5	R650	C1	R854	D4	R969	C4	R1147	*L2
C218	F3	C516	*E4	C705	A4	C1007	*K2	C1212	*P4	C1355	*N4	C1615	*P3	D1202	*P4	IC208	*F3	IC1101	*P5	Q501	J1	R202	F3	R402	*J5	R527	G5	R651	*B2	R855	E4	R970	C4	R1148	*L2
C219	G3	C517	F4	C706	B4	C1008	*K2	C1213	P4	C1356	*N4	C1616	*P1	D1203	*P4	IC209	F3	IC1102	P5	Q502	J1	R203	G3	R403	*J4	R528	G5	R652	C1	R856	*D4	R971	C4	R1149	*L2
C220	E3	C518	F4	C707	B3	C1009	*J3	C1214	P4	C1357	N4	C1617	N1	D1204	K3	IC210	*E3	IC1103	P5	Q600	D1	R204	*G3	R404	*J4	R529	G5	R653	C1	R857	*D4	R972	C4	R1150	*L2
C221	F3	C519	F4	C708	B3	C1010	*K3	C1215	P4	C1358	N4	C1618	*P3	D1205	*P4	IC211	E3	IC1104	K5	Q601	D1	R205	*G3	R405	*J4	R530	G5	R654	C1	R858	*D4	R973	C4	R1151	*K5
C222	E3	C520	H4	C709	A4	C1011	*L3	C1216	P4	C1359	*N4	C1619	*P3	D1206	*P4	IC212	H3	IC1105	K5	Q800	D4	R206	H4	R406	*J4	R531	*G4	R655	C1	R859	D4	R974	C4	R1152	*K5
C223	F3	C521	H4	C710	B3	C1012	*L2	C1218	*K1	C1360	*N4	C1620	P1	D1207	*P4	IC213	*H3	IC1106	K5	Q801	*D4	R207	*H3	R407	*J4	R532	*E5	R656	C1	R860	D4	R975	C4	R1153	*K5
C224	E2	C522	H4	C711	A4	C1013	*J3	C1219	P4	C1361	*N4	C1621	*P3	D1208	K4	IC214	G3	IC1107	K5	Q802	D4	R301	*G1	R408	*J4	R533	*E5	R657	C1	R861	D4	R976	C4	R1154	*K5
C225	F2	C523	F4	C712	A4	C1014	*L3	C1220	*P5	C1362	N4	C1622	*P3	D1209	L4	IC215	*G3	IC1108	K5	Q803	*D4	R302	*H3	R409	*J4	R534	*E5	R658	C1	R862	D4	R977	C4	R1155	*K5
C226	E2	C524	H4	C713	A4	C1015	*L2	C1221	*P5	C1363	N4	C1623	*P3	D1210	L3	IC300	*H3	IC1109	K4	Q1100	K5	R303	*H3	R410	*J4	R535	*D5	R659	C1	R863	D4	R978	C4	R1156	*K5
C227	F2	C525	*F4	C714	*D3	C1016	*J2	C1222	*P5	C1364	N3	C1624	*P3	D1211	K3	IC301	J4	IC1110	K4	Q1101	K5	R304	*H3	R411	*J4	R536	*D5	R660	C1	R864	*D4	R979	C4	R1157	*K5
C228	*G3	C526	F4	C715	*D3	C1017	*L2	C1223	*P5	C1365	N5	C1625	*P3	D1212	*K3	IC302	F5	IC1111	L2	Q1102	K5	R305	*H3	R412	*J4	R537	*E5	R661	C1	R865	*D4	R980	C4	R1158	*K5
C229	*G3	C527	F4	C716	D3	C1018	*K2	C1224	*K1	C1366	N5	C1626	*P3	D1213	K3	IC303	F5	IC1112	K5	Q1103	K5	R306	*H4	R413	*J5	R538	*E5	R662	C1	R866	E4	R981	C4	R1159	*K4
C230	F3	C528	H5	C717	*C4	C1019	*K2	C1225	*P4	C1367	*N5	C1627	*P1	D1214	*K3	IC304	G5	IC1113	K4	Q1104	K5	R307	J4	R414	*J4	R539	*E5	R663	*B2	R867	*D4	R982	C4	R1160	*K4
C231	G3	C529	F5	C718	*C4	C1020	*J2	C1226	*P4	C1368	*N5	C1628	*P1	D1215	*K3	IC305	H5	IC1114	K5	Q1105	K5	R308	H4	R415	*J4	R540	*E5	R664	C1	R868	*D4	R983	C4	R1163	*K5
C232	*F3	C530	*G4	C719	*C4	C1021	*J3	C1227	*P4	C1369	*N5	C1629	*P3	D1216	*K4	IC306	E5	IC1115	L5	Q1106	K5	R309	H4	R416	*J5	R541	*F4	R665	C1	R869	D4	R984	C4	R1164	*L5
C233	F3	C531	*G5	C720	*C4	C1022	*K3	C1228	*K1	C1370	*N5	C1630	*P3	D1217	K4	IC307	F5	IC1116	K5	Q1107	L5	R310	H4	R417	*J5	R542	E5	R666	C1	R870	*D4	R985	C4	R1165	*K5
C234	*E3	C532	*G4	C721	*D3	C1023	*L3	C1229	*K1	C1371	*N5	C1631	*P1	D1218	K4	IC308	G5	IC1117	L5	Q1108	L5	R311	H4	R418	*J5	R543	G5	R667	*D1	R871	*D4	R986	C4	R1166	*L5
C235	E3	C533	*G4	C722	*D3	C1024	*J2	C1230	*K1	C1372	*N5	C1632	*P1	D1219	*K3	IC309	H5	IC1200	M3	Q1200	*L4	R312	J4	R419	H5	R544	*H4	R668	*D1	R872	D4	R987	C4	R1167	*K5
C236	*G3	C534	*G4	C723	*D4	C1025	*L2	C1231	*K1	C1373	*N5	C1633	P2	D1220	K3	IC311	G5	IC1201	P3	Q1201	*L4	R313	H3	R420	H5	R545	G5	R669	*B1	R873	E4	R988	C4	R1168	*K5
C237	H4	C535	*G4	C724	*D4	C1026	*L2	C1232	L4	C1374	*N5	C1634	P2	D1221	K4	IC312	J5	IC1202	P4	Q1202	*P1	R315	J3	R421	H5	R546	*E5	R670	*B1	R874	D4	R989	C4	R1169	*K5
C238	*H3	C536	*G4	C725	C4	C1027	*K2	C1233	L4	C1375	N5	C1635	*P2	D1222	*K4	IC400	H2	IC1203	P5	Q1203	M3	R316	J3	R422	H5	R547	E5	R671	*B1	R875	D4	R990	C4	R1170	*K5
C239	G3	C537	*G4	C726	D4	C1028	K1	C1234	L4	C1376	N5	C1636	*P2	D1223	*K4	IC401	J4	IC1204	P5	Q1204	*P1	R317	J4	R423	H5	R548	H5	R672	*C1	R876	D4	R991	C4	R1171	*K5
C301	*H3	C538	*G4	C727	*D4	C1029	K2	C1235	K4	C1377	N5	C1637	*P1	D1224	M3	IC402	J5	IC1205	P4	Q1205	*M3	R318	J4	R424	H5	R549	H5	R673	A1	R877	*D4	R992	C4	R1172	*K5
C302	*J4	C539	*G4	C728	*C4	C1030	K2	C1236	P4	C1378	N5	C1638	*P1	D1225	P1	IC403	*H1	IC1206	*K1	Q1206	*P1	R319	J4	R425	J3	R550	H4	R674	A2	R878	*E4	R993	B4	R1173	K4
C303	*J4	C540	*G4	C729	*C4	C1031	K1	C1237	P4	C1379	N5	C1639	*N2	D1226	P1	IC404	*J5	IC1207	P4	Q1300	*N3	R320	J4	R426	J2	R551	H4	R676	A2	R879	*D4	R994	B4	R1174	K4
C304	*J4	C541	*G4	C730	*D4	C1032	*L1	C1238	*L4	C1380	N5	C1640	*P2	D1227	P1	IC405	*H2	IC1208	L4	Q1600	*P3	R321	J4	R427	J2	R552	G5	R677	*C1	R880	*D4	R995	B4	R1175	*L5
C305	*J4	C600	B2	C731	*D4	C1033	*L1	C1239	*L4	C1500	N2	C1641	*P2	D1228	*M3	IC406	*J5	IC1209	M3	Q1601	*P3	R322	J4	R428	J3	R553	H5	R678	A2	R881	*E4	R996	B4	R1176	*L5
C306	*J3	C601	B2	C732	*D4	C1034	L4	C1240	*K3	C1501	*N2	C1642	*P2	D1300	*N4	IC407	J4	IC1210	J2			R323	J4	R429	J2	R554	H5	R679	*C1	R882	*E4	R997	B4	R1177	*L5
C307	*H3	C602	B2	C733	*D4	C1035	L4	C1241	K3	C1502	N2	C1643	*N2	D1500	*M2	IC408	J5	IC1300	N3	R100	*E2	R324	J4	R430	J2	R555	H4	R680	*C1	R883	*E4	R998	B4	R1178	*L5

R1181	*L4	R1320	*L4	R1412	*N5	R1571	N2	R5015	F4	RB917	*D5
R1182	*L4	R1321	*L4	R1413	*N5	R1572	M2	R5016	*E4	RB918	*D5
R1183	*L4	R1322	*L4	R1414	*N5	R1573	N2	R5017	*E4	RB919	*C5
R1184	J3	R1323	*M5	R1415	*N5	R1574	M2	R5018	F4	RB920	*C5
R1185	J3	R1324	*M5	R1416	*N5	R1575	*N2	R5019	*F4	RB921	*C5
R1186	*J3	R1325	*M5	R1417	*N5	R1576	*N2	R5020	*F4	RB922	*C5
R1187	J3	R1326	*L5	R1418	*N5	R1577	*M2	R5021	*F4	RB924	*D5
R1188	J3	R1327	*M5	R1419	*N5	R1578	*M2	R5022	*H4	RB925	*D5
R1189	*J3	R1328	*M5	R1420	*N5	R1579	*N2	R5023	F4	RB928	*C5
R1190	L2	R1329	*M5	R1421	*N5	R1580	*M2	R5024	F4	RB929	*C5
R1191	*H5	R1330	*M5	R1422	*N5	R1581	*N2			RB937	*C4
R1192	M5	R1331	*L5	R1423	*N5	R1582	*M2	RB103	E2	RB938	*C5
R1193	*L2	R1332	*M5	R1424	*N5	R1583	*N2	RB104	E2	RB939	*C5
R1200	P3	R1333	*L5	R1425	*N5	R1584	*M2	RB105	*E2	RB940	*C4
R1202	*P5	R1334	*M5	R1426	*N5	R1600	*P1	RB106	*F2	RB941	*C5
R1203	*P5	R1335	*M5	R1427	*N5	R1601	*P1	RB107	*F2	RB942	*C5
R1204	*P5	R1336	*M5	R1428	*N5	R1602	P3	RB108	F2	RB943	B4
R1205	*P5	R1337	*M5	R1429	*N5	R1603	P4	RB109	F2	RB947	*B4
R1206	P3	R1338	*M5	R1430	*N5	R1604	*P1	RB110	F2	RB948	C4
R1208	*P5	R1339	*L5	R1431	*N5	R1605	*P1	RB111	F2	RB949	C4
R1209	*P5	R1340	*L5	R1432	*N5	R1606	*P1	RB112	F2	RB1000	*P1
R1210	*P5	R1341	*M5	R1500	*N3	R1607	*P2	RB113	F2	RB1002	*M1
R1211	*P5	R1342	*M5	R1501	*N3	R1608	*N3	RB114	F2	RB1004	N1
R1212	*P3	R1343	*L5	R1502	*N3	R1609	*P3	RB115	F2	RB1005	*L1
R1214	*P4	R1344	*M5	R1503	*N3	R1610	*N3	RB116	*H1	RB1006	M1
R1215	*P4	R1345	*L5	R1504	*N3	R1611	*P3	RB117	*G1	RB1007	M1
R1216	*P4	R1346	*L5	R1505	*N3	R1612	*N3	RB118	H1	RB1008	L1
R1217	*P4	R1347	*M5	R1506	*N3	R1613	*P3	RB119	H1	RB1009	*M1
R1218	*K1	R1348	*L5	R1507	N2	R1614	*P3	RB120	*E2	RB1010	*M1
R1219	P4	R1349	*L5	R1508	N2	R1615	*N3	RB121	*E2	RB1011	*M1
R1220	*K1	R1350	*M5	R1509	M2	R1616	*P3	RB301	*J4	RB1012	*M1
R1221	P4	R1351	*L5	R1510	M2	R1617	*P3	RB302	H4	RB1013	*M1
R1222	P4	R1352	*L5	R1511	*N2	R1618	*P3	RB303	H4	RB1014	*L1
R1223	P4	R1353	*M5	R1512	*M2	R1619	*P3	RB304	*J3	RB1015	*L1
R1224	P4	R1354	*L5	R1513	N2	R1620	*P3	RB305	*J3	RB1016	L1
R1225	P4	R1355	*L5	R1514	M2	R1621	*P3	RB306	*J4	RB1017	L1
R1226	*P4	R1356	*M5	R1515	*N2	R1622	*P1	RB307	*H3	RB1200	*P1
R1227	*K1	R1357	*M5	R1516	*M2	R1623	*P3	RB308	*F5		
R1228	*P4	R1358	*L5	R1517	*N2	R1624	*P3	RB309	*F5	RV1200	N1
R1229	*P4	R1359	*L5	R1518	*M2	R1625	*P1	RB310	*F5		
R1230	*P4	R1360	*N4	R1519	*N2	R1626	*P3	RB311	*G5	S100	G1
R1231	*K1	R1361	*N4	R1520	*M2	R1627	*P3	RB312	*G5	S101	H1
R1232	*K1	R1362	*N4	R1521	M2	R1628	*P1	RB313	*G5	S102	A1
R1233	L4	R1363	*N4	R1522	M2	R1629	P3	RB317	*E5	S600	A1
R1234	K4	R1364	*N4	R1523	*N2	R1630	P3	RB318	*F5	S601	A1
R1235	*L4	R1365	*N4	R1524	*M2	R1631	P3	RB319	*F5	S1000	P1
R1236	*L4	R1366	*N4	R1525	*N2	R1632	P3	RB320	*F5	S1200	N1
R1237	*L4	R1367	*N4	R1526	*N2	R1633	P3	RB321	*G5	S1201	N1
R1238	*P4	R1368	*N4	R1527	*M2	R1634	P3	RB322	*G5		
R1239	*K4	R1369	*N4	R1528	*M2	R1635	N1	RB323	*H5	TP100	A1
R1240	*L4	R1370	*N4	R1529	*N2	R1636	N1	RB324	*H5	TP400	J5
R1241	*K3	R1371	*N4	R1530	*N2	R1637	*P3	RB325	*J5	TP401	J4
R1242	*K3	R1372	N4	R1531	*M2	R1638	*P3	RB326	*J5	TP402	H2
R1243	*N1	R1373	N4	R1532	*M2	R1639	*P1	RB328	*H5	TP500	G4
R1244	*N1	R1374	*N4	R1533	*N2	R1640	*P1	RB329	*H5	TP501	G3
R1245	M3	R1375	*N4	R1534	*M2	R1641	*P1	RB332	*E5	TP502	G1
R1246	*P1	R1376	N4	R1535	*N2	R1642	*P1	RB333	*F5	TP503	H1
R1247	*M3	R1377	N4	R1536	M2	R1643	*P1	RB334	*F5	TP504	H1
R1248	*M3	R1378	*N4	R1537	N2	R1644	*P1	RB335	*F5	TP505	H1
R1249	*M3	R1379	N4	R1538	N2	R1645	P2	RB336	*G5	TP506	H1
R1250	*P1	R1380	*N4	R1539	M2	R1646	P2	RB337	*G5	TP507	H1
R1251	*M3	R1381	*N4	R1540	M2	R1647	N2	RB400	*H2	TP508	G4
R1252	*P1	R1382	*N4	R1541	*M2	R1648	P2	RB500	*E5	TP509	G3
R1253	*M3	R1383	*N4	R1542	M2	R1649	*P2	RB501	*E5	TP510	F4
R1254	*M3	R1384	*N4	R1543	*M2	R1650	*P2	RB502	*D5	TP511	F4
R1255	*L1	R1385	*N4	R1544	*N2	R1651	*P2	RB505	*F4	TP600	D1
R1256	*L1	R1386	*N4	R1545	M2	R1652	*P2	RB506	H4	TP601	D1
R1257	*M3	R1387	*N4	R1546	*N2	R1653	*P2	RB507	*F4	TP602	D1
R1258	M3	R1388	*N4	R1547	M2	R1654	*P2	RB508	H4	TP603	D1
R1259	M3	R1389	*N4	R1548	*M2	R1655	*P2	RB509	F4	TP700	D4
R1260	N1	R1390	*N4	R1549	*N2	R1656	*P2	RB510	H4	TP701	D3
R1261	K1	R1391	*N4	R1550	*M2	R1657	*P2	RB511	H4	TP703	D4
R1300	*M4	R1392	*N4	R1551	N2	R1658	*P2	RB602	A2	TP704	D4
R1301	*M4	R1393	*N4	R1552	M2	R1659	*P2	RB603	A2	TP705	D4
R1302	*M4	R1394	*N4	R1553	M2	R1660	*P2	RB604	*B2	TP706	C4
R1303	*M4	R1395	*N4	R1554	*N2	R1661	*P2	RB605	*B2	TP800	D4
R1304	*N3	R1396	*N4	R1555	*N2	R1662	*N2	RB607	*B2	TP801	D4
R1305	*N3	R1397	*N4	R1556	M2	R5000	*G4	RB608	A2	TP1000	M1
R1306	*N3	R1398	*N4	R1557	*M2	R5001	F4	RB609	C2	TP1001	M1
R1307	M4	R1399	*N4	R1558	*M2	R5002	*G4	RB610	C2	TP1100	K3
R1308	*N3	R1400	*N4	R1559	*M2	R5003	*G4	RB611	C2	TP1101	K3
R1309	M4	R1401	*N5	R1560	*N2	R5004	*F4	RB612	C2	TP1102	L2
R1310	*N3	R1402	*N5	R1561	*N2	R5005	*G4	RB613	C2	TP1104	L2
R1311	*N3	R1403	*N5	R1562	*M2	R5006	*E4	RB614	C2	TP1105	M1
R1312	*L4	R1404	*N5	R1563	N2	R5007	*E4	RB615	C2	TP1106	L2
R1313	M4	R1405	*N5	R1564	*N2	R5008	*F4	RB616	C2	TP1107	N1
R1314	*L4	R1406	*N5	R1565	*N2	R5009	*E4	RB617	*A1	TP1108	L2
R1315	M4	R1407	*N5	R1566	M2	R5010	*E4	RB618	*A1	TP1109	*P5
R1316	*L4	R1408	*N5	R1567	*M2	R5011	*F4	RB619	*A1	TP1200	P4
R1317	*L4	R1409	*N5	R1568	*M2	R5012	*F4	RB620	*A1	TP1201	P4
R1318	*L4	R1410	*N5	R1569	*N2	R5013	F4	RB915	*C5	TP1202	P4
R1319	*L4	R1411	*N5	R1570	*M2	R5014	F4	RB916	*C5	TP1203	P4

TP1204	L1										
TP1205	L1										
TP1206	M3										
TP1207	K1										
TP1300	L5										
TP1301	L5										
TP1302	M5										
TP1303	M5										
TP1304	N3										
TP1305	N3										
TP1306	N4										
TP1307	N4										
TP1308	N4										
TP1309	P4										
TP1500	N2										
TP1501	M2										
TP1502	N2										
TP1503	M2										
TP1600	N3										
TP1601	P3										
TP1602	P2										
TP1603	P2										
TP1604	P2										
TP1605	P2										
TP1606	P2										
TP1607	P2										
X101	E1										
X400	J1										
X401	H3										
X600	A1										
X700	*D3										
X1000	K3										
*:B SIDE											

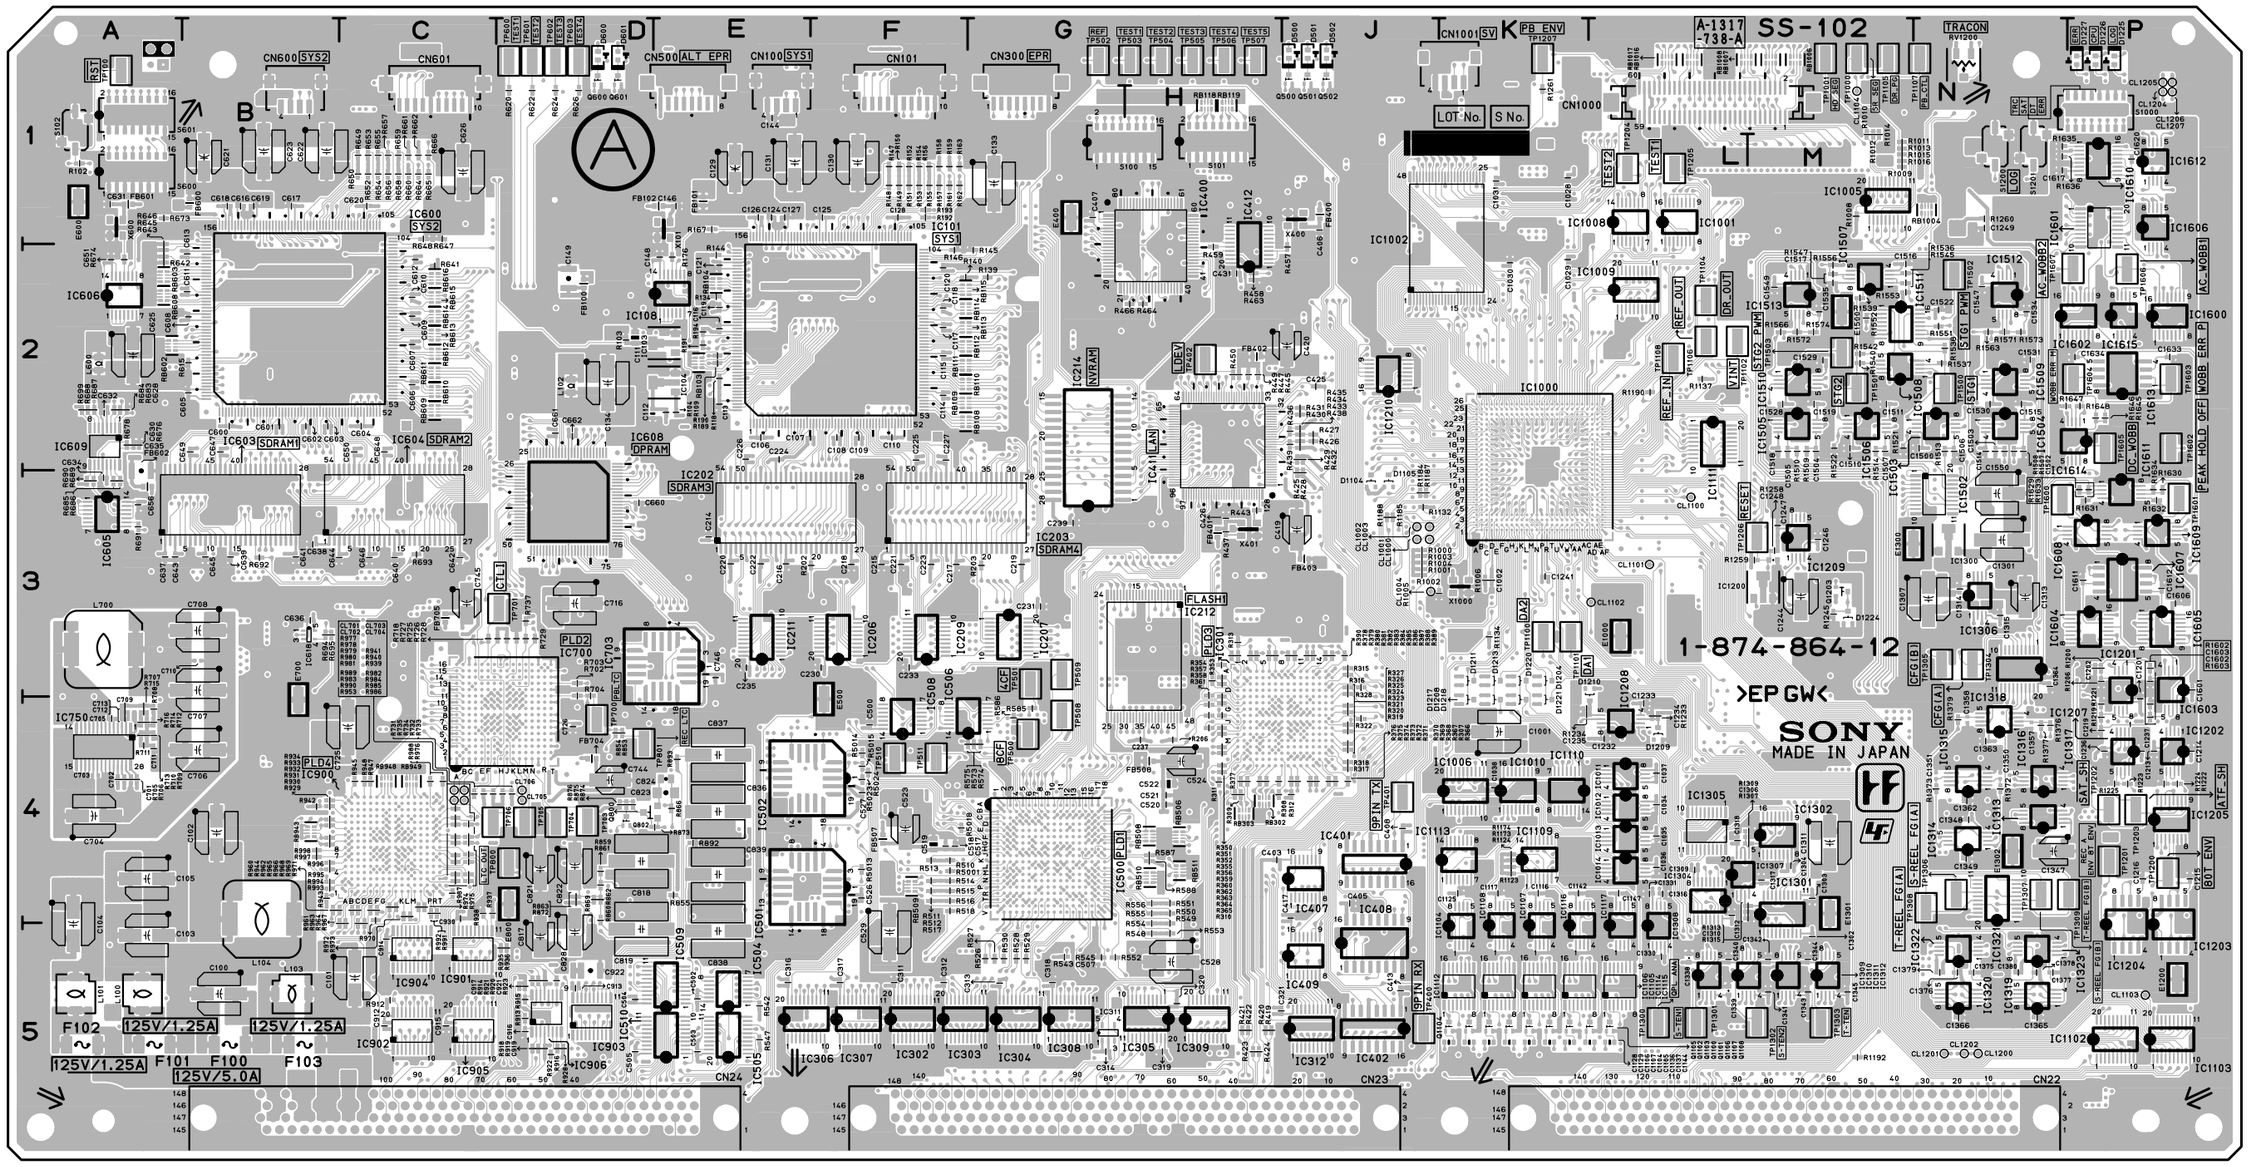

SS-102 -A SIDE-
SUFFIX: -12

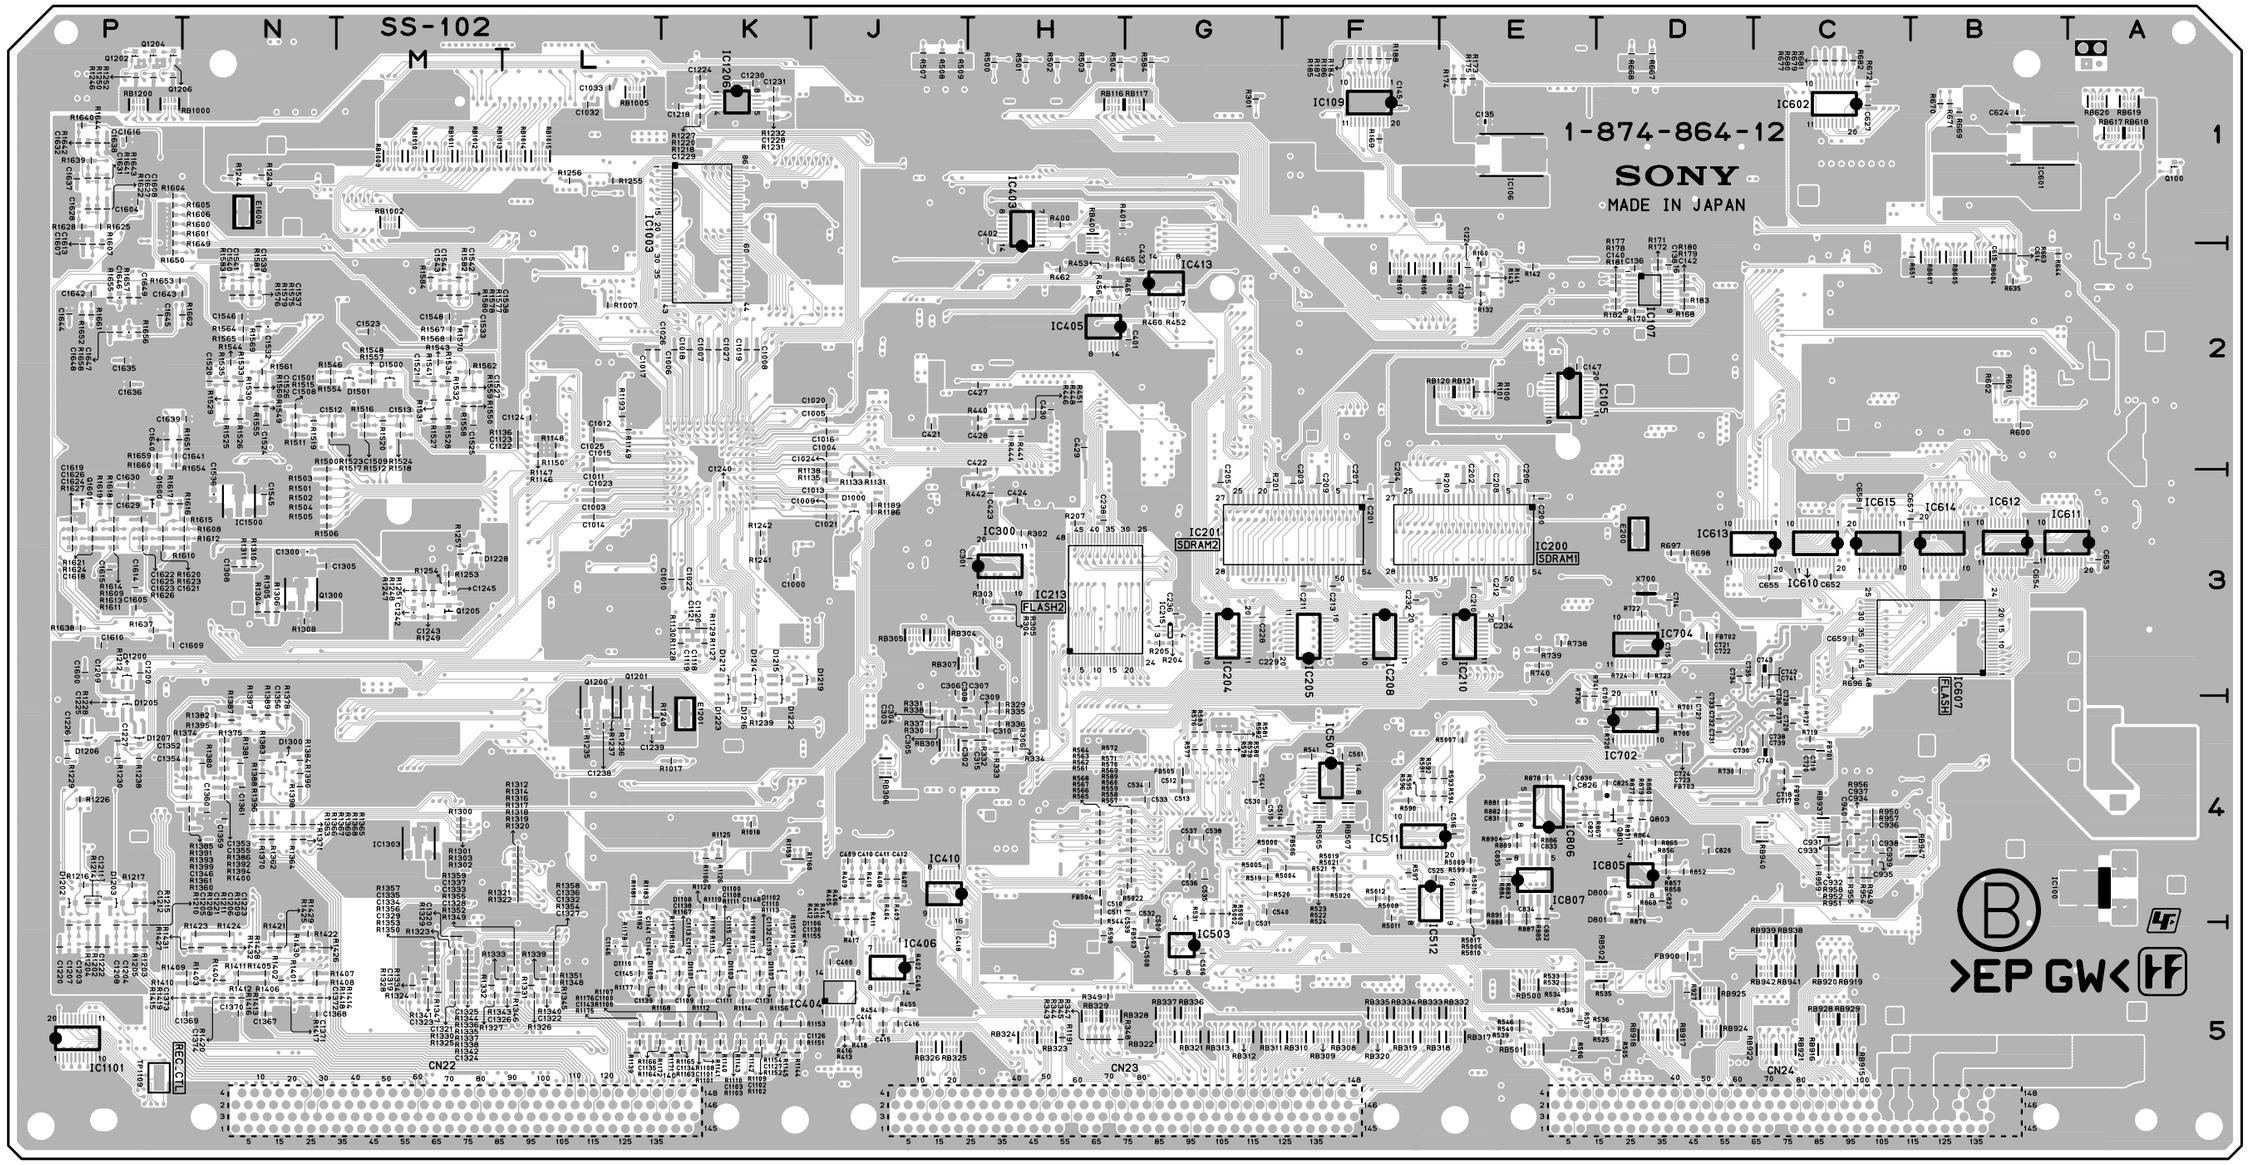

SS-102 -B SIDE-
SUFFIX: -12

SS-102 (1-874-864-13)

C100	B5	C308	*J4	C603	B2	C734	*D3	C1036	L4	C1242	*M3	C1503	N2	C1644	*P2	D1501	*M2	IC409	J5	IC1301	M5	R101	*E2	R325	J4	R431	J2	R556	H4	R681	*C1	R884	*E4	R1000	J3
C101	C5	C309	*H4	C604	C2	C735	*D3	C1037	L4	C1243	*M3	C1504	M2	C1645	*P2			IC410	*J4	IC1302	M4	R102	A1	R326	J3	R432	J2	R557	*G4	R682	*C1	R885	*E4	R1001	J3
C102	B4	C310	*H4	C605	B2	C736	*C4	C1038	K4	C1244	M3	C1505	M2	C1646	*P2	E200	*D3	IC411	H2	IC1303	*M4	R103	D2	R327	J3	R433	J2	R558	*G4	R683	A2	R886	*E4	R1002	J3
C103	A5	C311	F5	C606	C2	C737	*C4	C1100	*K5	C1245	*M3	C1506	N2	C1647	*P2	E400	G1	IC412	H2	IC1304	L4	R104	E2	R328	J3	R434	J2	R559	*G4	R684	A2	R887	*E5	R1003	J3
C104	A5	C312	F5	C607	C2	C738	*C4	C1101	*K5	C1246	M3	C1507	M2	C1648	*P2	E500	F4	IC413	*G2	IC1305	L4	R109	E2	R329	*H4	R435	J2	R560	*G4	R685	A3	R888	*E5	R1004	J3
C105	A4	C313	G5	C608	B2	C739	*C4	C1102	*K5	C1247	M3	C1508	*N2	C1649	*P2	E600	A1	IC500	G4	IC1306	N3	R118	E2	R330	*J4	R436	J2	R561	*H4	R686	A3	R889	*E4	R1005	J3
C106	E2	C314	G5	C609	C2	C740	*C4	C1103	*K5	C1248	M3	C1509	*M2			E700	B4	IC501	E4	IC1307	L4	R132	*E2	R331	*J4	R437	H3	R562	*H4	R687	A2	R890	*E4	R1006	K3
C107	E2	C315	*H4	C610	C2	C741	*C3	C1104	K5	C1249	N1	C1510	M2	CL701	C4	E800	D4	IC502	E4	IC1308	L5	R134	E2	R332	*H4	R438	J2	R563	*H4	R688	A2	R891	*E4	R1007	*L2
C108	F2	C316	E5	C611	B2	C742	*C3	C1105	K5	C1300	*N3	C1511	M2	CL702	C4	E1000	L3	IC503	*G5	IC1309	L5	R139	G2	R333	*H4	R439	J2	R564	*H4	R689	A3	R892	E4	R1008	M1
C109	F2	C317	F5	C612	C2	C743	*C3	C1106	K5	C1301	N3	C1512	*N2	CL703	C4	E1200	P5	IC504	E5	IC1310	L5	R140	F2	R334	*H4	R440	*H2	R565	*H4	R690	A3	R893	E4	R1009	M1
C110	F2	C318	G5	C613	B2	C744	D4	C1107	K5	C1302	M5	C1513	*M2	CL704	C4	E1201	*K4	IC505	E5	IC1311	M5	R141	*E2	R335	*H4	R441	*H2	R566	*H4	R691	A3	R912	C5	R1010	M1
C111	D2	C319	H5	C614	*B2	C745	C3	C1108	*K5	C1303	M4	C1514	N2	CL705	D4	E1300	M3	IC506	G4	IC1312	M5	R142	*E2	R336	*H4	R442	*H3	R567	*H4	R692	B3	R913	D5	R1011	M1
C112	D2	C320	H5	C615	*B2	C746	E3	C1109	*K5	C1304	M4	C1515	N2	CL706	D4	E1301	M4	IC507	*F4	IC1313	N4	R143	*E2	R337	*J4	R443	H3	R568	*H4	R693	C3	R914	D5	R1012	M1
C113	E2	C321	H5	C616	B1	C817	D5	C1110	*K5	C1305	*N3	C1516	M2	CL1000	J3	E1302	N4	IC508	F4	IC1314	N4	R144	E2	R338	*J4	R444	*H2	R569	*G4	R694	B3	R915	D5	R1013	M1
C114	F2	C400	*J5	C617	B1	C818	D4	C1111	*K5	C1306	M4	C1517	M2	CL1001	J3	E1500	M2	IC509	E5	IC1315	N4	R145	G2	R343	*H5	R445	H2	R570	*G4	R695	B3	R916	D5	R1014	M1
C115	F2	C401	*G2	C618	B1	C819	D5	C1112	*K5	C1307	N3	C1518	M2	CL1002	J3	E1600	*N1	IC510	E5	IC1316	N4	R146	F2	R344	*H5	R446	*H2	R571	*G4	R696	*C3	R918	D5	R1015	M1
C116	E2	C402	*H1	C619	B1	C820	*D4	C1113	*K5	C1308	*N3	C1519	M2	CL1003	J3			IC511	*E4	IC1317	N4	R147	F1	R345	*H5	R447	H2	R572	*G4	R697	*D3	R919	D5	R1016	M1
C117	F2	C403	H4	C620	C1	C821	D4	C1114	*K5	C1309	L4	C1520	*N2	CL1004	J3	F100	B5	IC512	*F4	IC1318	N3	R148	F1	R347	*H5	R448	*H2	R573	G4	R698	*D3	R920	D5	R1017	*K4
C118	F2	C404	*J5	C621	B1	C822	D4	C1115	*K5	C1310	M4	C1521	*M2	CL1100	L3	F101	A5	IC600	B2	IC1319	N5	R149	F1	R348	*H5	R449	H2	R574	G4	R699	A2	R921	D5	R1018	*K4
C119	E2	C405	J4	C622	B1	C823	E4	C1116	K4	C1311	M4	C1522	N2	CL1101	L3	F102	A5	IC601	*B1	IC1320	N5	R150	F1	R349	*H5	R450	H2	R575	F4	R700	*D4	R922	D5	R1100	*K5
C120	F2	C406	J1	C623	B1	C824	E4	C1117	K4	C1312	L4	C1523	*M2	CL1102	L3	F103	B5	IC602	*C1	IC1321	N4	R151	F1	R350	H3	R451	*H2	R576	*G4	R701	*D4	R923	D5	R1101	*K5
C121	E2	C407	G1	C624	*B1	C825	*D4	C1118	*K3	C1313	N3	C1524	*N2	CL1103	P5			IC603	B3	IC1322	N5	R152	F1	R351	H3	R452	*G2	R577	*G4	R702	D3	R927	*D5	R1102	*K5
C122	*E2	C408	J4	C625	A2	C826	*D4	C1119	*K3	C1314	N3	C1525	*M2	CL1104	M1	FB100	D2	IC604	C3	IC1323	N5	R153	F1	R352	H3	R453	*H2	R578	*G4	R703	D3	R928	D5	R1103	*K5
C123	*E2	C409	*J4	C626	C1	C827	*E4	C1120	*K3	C1315	N3	C1526	*N2	CL1200	N5	FB101	E1	IC605	A3	IC1500	*N3	R154	F1	R353	H3	R454	*J5	R579	*G4	R704	D3	R929	B4	R1106	*K4
C124	E1	C410	*J4	C627	*C1	C828	D5	C1121	*K3	C1316	L4	C1527	*M2	CL1201	N5	FB102	E1	IC606	A2	IC1502	N3	R155	F1	R354	H3	R455	*J5	R580	*G4	R705	A4	R930	B4	R1107	*K5
C125	F1	C411	*J4	C628	A2	C829	*D4	C1122	*L2	C1317	M4	C1528	M2	CL1202	N5	FB400	J1	IC607	*B3	IC1503	N2	R156	F1	R355	H4	R456	*H2	R581	*G4	R706	A4	R931	B4	R1108	*K5
C126	E1	C412	*J4	C630	A2	C830	*E4	C1123	*L2	C1318	L4	C1529	M2	CL1204	P1	FB401	H3	IC608	D3	IC1504	N2	R157	F1	R356	H4	R457	J2	R582	*G4	R707	A4	R932	B4	R1109	*K5
C127	E1	C413	J5	C631	A1	C831	*E4	C1124	*L2	C1319	*M5	C1530	N2	CL1205	P1	FB402	H2	IC609	A2	IC1505	M2	R158	F1	R357	H4	R458	H2	R583	*G4	R708	A4	R933	B4	R1110	*K5
C128	F1	C414	*J5	C632	A2	C832	*E4	C1125	K4	C1320	*M5	C1531	N2	CL1206	P1	FB403	J3	IC610	*C3	IC1506	M2	R159	F1	R358	H4	R459	H2	R584	*G1	R709	A4	R934	B4	R1111	*K5
C129	E1	C415	*J5	C634	A3	C833	*E4	C1126	*K5	C1321	*M5	C1532	*N2	CL1207	P1	FB503	*G5	IC611	*A3	IC1507	M2	R160	*E2	R359	H4	R460	*G2	R585	G4	R710	A4	R935	D5	R1112	*K5
C130	F1	C416	*J5	C635	A3	C834	*E4	C1127	*K5	C1322	*L5	C1533	*M2			FB504	*H4	IC612	*B3	IC1508	N2	R161	F1	R360	H4	R461	*H2	R586	G4	R711	A4	R936	D5	R1113	*K5
C131	E1	C417	J4	C636	B3	C835	*E4	C1128	K5	C1323	*M5	C1534	N2	CN22	M5	FB505	*G4	IC613	*C3	IC1509	N2	R162	F1	R361	H4	R462	*H2	R587	H4	R712	A4	R937	C4	R1114	*K5
C133	G1	C418	*J5	C637	A3	C836	E4	C1129	K5	C1324	*M5	C1535	M2	CN23	G5	FB506	*F4	IC614	*B3	IC1510	M2	R163	F1	R362	H4	R463	H2	R588	H4	R713	A4	R938	C4	R1115	*K5
C134	D2	C419	J3	C638	B3	C837	E4	C1130	*K5	C1325	*M5	C1536	*N3	CN24	C5	FB507	F4	IC615	*C3	IC1511	M2	R167	E1	R363	H4	R464	H2	R589	*G4	R714	A4	R939	C4	R1116	*K5
C135	*E1	C420	J2	C639	B3	C838	E5	C1131	*K5	C1326	*L5	C1537	*N2	CN100	E1	FB508	H4	IC618	B3	IC1512	N2	R168	*D2	R364	H4	R465	*H2	R590	*F4	R715	A4	R940	C4	R1117	*K5
C136	*D2	C421	*J2	C640	C3	C839	E4	C1132	*K5	C1327	*L5	C1538	*M2	CN101	F1	FB600	B1	IC700	D4	IC1513	M2	R169	*F1	R365	H4	R466	H2	R591	*F4	R716	A4	R941	C4	R1118	*K5
C138	*D2	C422	*H3	C641	B3	C912	C5	C1133	*K5	C1328	*L5	C1539	*N2	CN300	G1	FB601	A1	IC702	*D4	IC1600	P2	R170	*D2	R366	J4	R500	*H1	R592	*F4	R718	C3	R942	B4	R1119	*K4
C140	*D2	C423	*H3	C642	C3	C913	D5	C1134	*K5	C1329	*M5	C1540	*N2	CN500	E1	FB602	A3	IC703	E3	IC1601	P1	R171	*D2	R367	J4	R501	*H1	R593	*E4	R719	*C4	R943	B4	R1120	*K4
C142	*D2	C424	*H3	C643	A3	C914	C5	C1135	*L5	C1330	L5	C1541	*N2	CN600	B1	FB700	*C4	IC704	*D3	IC1602	N2	R172	*D2	R368	J4	R502	*H1	R594	*E4	R720	*D4	R944	B4	R1123	K4
C144	E1	C425	J2	C644	B3	C915	C5	C1136	K5	C1331	L4	C1542	*M2	CN601	C1	FB701	*C4	IC750	A4	IC1603	P3	R173	*E1	R369	J4	R503	*H1	R595	*F4	R721	*C4	R945	C4	R1124	K4
C145	*F1	C426	H3	C645	B3	C916	D5	C1137	L5	C1332	*L5	C1543	*M2	CN1000	L1	FB702	*D3	IC805	*D4	IC1604	P3	R174	*E1	R370	J4	R504	*H1	R596	*F4	R722	*D3	R947	C4	R1125	*K4
C146	E1	C427	*H2	C646	C3	C917	D5	C1138	*K5	C1333	*L5	C1544	*M2	CN1001	K1	FB703	*D4	IC806	*E4	IC1605	P3	R175	*E1	R371	J4	R505	*D5	R597	*F4	R723	*D3	R948	C4	R1126	*K4
C147	*E2	C428	*H2	C647	B2	C919	D5	C1139	*K5	C1334	*M5	C1545	*N3			FB704	D4	IC807	*E4	IC1606	P2	R176	E2	R372	H4	R506	*E5	R598	*H5	R724	*D3	R949	*C4	R1127	*K3
C148	E2	C429	*H2	C648	C2	C921	D5	C1140	*L5	C1335	*M5	C1546	*N2	D500	J1	FB705	C3	IC900	C4	IC1607	P3	R177	*D2	R373	H4	R507	*J1	R599	*E4	R725	D3	R950	*C4	R1128	*K3
C149	D2	C430	*H2	C649	B2	C922	D5	C1141	*L5	C1336	*L5	C1547	N2	D501	J1	FB900	*D5	IC901	C5	IC1608	N3	R178	*D2	R374	H4	R508	*J1	R600	*B2	R726	D3	R951	*C4	R1129	*K3
C200	*E3	C431	H2	C650	C2	C930	C4	C1142	K4	C1337	*L5	C1548	*M2	D502	J1			IC902	C5	IC1609	P3	R179	*D2	R375	H4	R509	*J1	R601	*B2	R727	D3	R952	*C4	R1130	*K3
C201	*F3	C432	*G2	C651	A2	C931	*C4	C1143	*L5	C1338	L5	C1549	M2	D600	D1	IC100	*A4	IC903	D5	IC1610	P1	R180	*D2	R376	H4	R510	F4	R602	*B2	R728	D3	R953	C4	R1131	*J3
C202	*E3	C500	F4	C652	*C3	C932	*C4	C1144	L5	C1339	L5	C1550	N3	D601	D1	IC101	F2	IC904	C5	IC1611	P3	R181	*D2	R377	H4	R511	F4	R615	B2	R729	D3	R954	*C4	R1132	J3
C203	*F3	C501	*F4	C653	*A3	C933	*C4	C1145	*L5	C1340	L5	C1600	*P3	D800	*D4	IC103	E2	IC905	C5	IC1612	P1	R182	*D2	R378	H3	R512	F4	R620	D1	R730	*D4	R955	*C4	R1133	*J3
C204	*F3	C502	E5	C654	*B3	C934	*C4	C1146	*L5	C1341	M5	C1601	P3	D801	*D4	IC104	E2	IC906	D5	IC1613	P2	R183	*D2	R379	H3	R513	F4	R622	D1	R731	C4	R956	*C4	R1134	K3
C205	*G3	C503	E5	C655	*C3	C935	*C4	C1147	L4	C1342	M5	C1602	P4	D1000	*J3	IC105	*E2	IC1000	K2	IC1614	P2	R184	*F1	R380	H3	R514	F4	R624	D1	R732	D4	R957	*C4	R1135	*J3
C206	*E3	C504	D5	C656	A3	C936	*C4	C1148	*K4	C1343	M5	C1603	P3	D1100	*K5	IC106	*E1	IC1001	L1	IC1615	P2	R185	*F1	R381	H3	R515	F4	R626	D1	R733	D4	R958	*C4	R1136	*L2
C207	*F3	C505	D5	C657	*B3	C937	*C4	C1200	*P3	C1344	M5	C1604	*P1	D1101	*K5	IC107	*D2	IC1002	K1			R186	*F1	R382	H3	R516	F4	R635	*B2	R734	C4	R959	*C4	R1137	L2
C208	*E3	C506	*G5	C658	*C3	C938	*C4	C1201	P4	C1345	M5	C1605	*P3	D1102	*K5	IC108	E2	IC1003	*K1	L100	A5	R187	*F1	R383	J3	R517	F4	R641	C2	R735	C4	R960	B4	R1138	*J3
C209	*F3	C507	G5	C659	*C3	C939	*C4	C1202	P3	C1346	*N4	C1606	P3	D1103	*K5	IC109	*F1	IC1005	M1	L101	A5	R188	*F1	R384	J3	R518	F4	R642	A2	R736	*E4	R961	B5	R1139	*L5
C210	*E3	C508	*G5	C660	D3	C940	*C4	C1203	*P5	C1347	N4	C1607	*P2	D1104	J3	IC200	*E3	IC1006	K4	L102	D2	R189	E2	R385	J3	R519	*G4	R643	A2	R737	D3	R962	C4	R1140	*K5
C211	*F3	C509	*G5	C661	D2	C1000	*K3	C1204	*P5	C1348	N4	C1608	*P1	D1105	J3	IC201	*F3	IC1008	L1	L103	B5	R190	E2	R386	J3	R520	*G4	R644	*B2	R738	*E3	R963	C5	R1141	*K5
C212	*E3	C510	*H4	C662	D2	C1001	K4	C1205	*P5	C1349	N4	C1609	*P3	D1106	*K5	IC202	E3	IC1009	L2	L104	B4	R191	E2	R387	J3	R521	*F4	R645	A2	R739	*E3	R964	C5	R1142	*K5
C213	*F3	C511	*H4	C700	*D4	C1002	K3	C1206	*P5	C1350	N4	C1610	*P3	D1107	*K5	IC203	F3	IC1010	K4	L600	A2	R192	F1	R388	J3	R522	*F4	R646	A2	R740	*E3	R965	C4	R1143	*K5
C214	E3	C512	*G4	C701	A4	C1003	*L3	C1207	*P5	C1351	N4	C1611	P3	D1108	*K5	IC204	*G3	IC1011	L4	L700	A3	R193	F1	R389	J3	R523	*F4	R647	C1	R741	*E4	R966	C4	R1144	*K5
C215	F3	C513	*G4	C702	A4	C1004	*J2	C1208	*P5	C1352	*N4	C1612	P3	D1109	*K5	IC205	*F3	IC1012	L4			R194	E2	R390	H3	R524	*F4	R648	C1	R852	*D4	R967	C5	R1145	*K5
C216	E3	C514	*G4	C703	A4	C1005	*J2	C1209	*P3	C1353	*N4	C1613	*P2	D1110	*L5	IC206	F3	IC1013	L4	Q100	*A1	R200	*F3	R400	*H1	R525	*D5	R649	C1	R853	D4	R968	C4	R1146	*L2
C217	F3	C515	*G4	C704	A4	C1006	*K2	C1211	*P4	C1354	*N4	C1614	*P3	D1200	*P3	IC207	G3	IC1014	L4	Q500	J1	R201	*G3	R401	*H1	R526	G5	R650	C1	R854	D4	R969	C4	R1147	*L2
C218	F3	C516	*E4	C705	A4	C1007	*K2	C1212	*P4	C1355	*N4	C1615	*P3	D1202	*P4	IC208	*F3	IC1101	*P5	Q501	J1	R202	F3	R402	*J5	R527	G5	R651	*B2	R855	E4	R970	C4	R1148	*L2
C219	G3	C517	F4	C706	B4	C1008	*K2	C1213	P4	C1356	*N4	C1616	*P1	D1203	*P4	IC209	F3	IC1102	P5	Q502	J1	R203	G3	R403	*J4	R528	G5	R652	C1	R856	*D4	R971	C4	R1149	*L2
C220	E3	C518	F4	C707	B3	C1009	*J3	C1214	P4	C1357	N4	C1617	N1	D1204	K3	IC210	*E3	IC1103	P5	Q600	D1	R204	*G3	R404	*J4	R529	G5	R653	C1	R857	*D4	R972	C4	R1150	*L2
C221	F3	C519	F4	C708	B3	C1010	*K3	C1215	P4	C1358	N4	C1618	*P3	D1205	*P4	IC211	E3	IC1104	K5	Q601	D1	R205	*G3	R405	*J4	R530	G5	R654	C1	R858	*D4	R973	C4	R1151	*K5
C222	E3	C520	H4	C709	A4	C1011	*L3	C1216	P4	C1359	*N4	C1619	*P3	D1206	*P4	IC212	H3	IC1105	K5	Q800	D4	R206	H4	R406	*J4	R531	*G4	R655	C1	R859	D4	R974	C4	R1152	*K5
C223	F3	C521	H4	C710	B3	C1012	*L2	C1218	*K1	C1360	*N4	C1620	P1	D1207	*P4	IC213	*H3	IC1106	K5	Q801	*D4	R207	*H3	R407	*J4	R532	*E5	R656	C1	R860	D4	R975	C4	R1153	*K5
C224	E2	C522	H4	C711	A4	C1013	*J3	C1219	P4	C1361	*N4	C1621	*P3	D1208	K4	IC214	G3	IC1107	K5	Q802	D4	R301	*G1	R408	*J4	R533	*E5	R657	C1	R861	D4	R976	C4	R1154	*K5
C225	F2	C523	F4	C712	A4	C1014	*L3	C1220	*P5	C1362	N4	C1622	*P3	D1209	L4	IC215	*G3	IC1108	K5	Q803	*D4	R302	*H3	R409	*J4	R534	*E5	R658	C1	R862	D4	R977	C4	R1155	*K5
C226	E2	C524	H4	C713	A4	C1015	*L2	C1221	*P5	C1363	N4	C1623	*P3	D1210	L3	IC300	*H3	IC1109	K4	Q1100	K5	R303	*H3	R410	*J4	R535	*D5	R659	C1	R863	D4	R978	C4	R1156	*K5
C227	F2	C525	*F4	C714	*D3	C1016	*J2	C1222	*P5	C1364	N3	C1624	*P3	D1211	K3	IC301	J4	IC1110	K4	Q1101	K5	R304	*H3	R411	*J4	R536	*D5	R660	C1	R864	*D4	R979	C4	R1157	*K5
C228	*G3	C526	F4	C715	*D3	C1017	*L2	C1223	*P5	C1365	N5	C1625	*P3	D1212	*K3	IC302	F5	IC1111	L2	Q1102	K5	R305	*H3	R412	*J4	R537	*E5	R661	C1	R865	*D4	R980	C4	R1158	*K5
C229	*G3	C527	F4	C716	D3	C1018	*K2	C1224	*K1	C1366	N5	C1626	*P3	D1213	K3	IC303	F5	IC1112	K5	Q1103	K5	R306	*H4	R413	*J5	R538	*E5	R662	C1	R866	E4	R981	C4	R1159	*K4
C230	F3	C528	H5	C717	*C4	C1019	*K2	C1225	*P4	C1367	*N5	C1627	*P1	D1214	*K3	IC304	G5	IC1113	K4	Q1104	K5	R307	J4	R414	*J4	R539	*E5	R663	*B2	R867	*D4	R982	C4	R1160	*K4
C231	G3	C529	F5	C718	*C4	C1020	*J2	C1226	*P4	C1368	*N5	C1628	*P1	D1215	*K3	IC305	H5	IC1114	K5	Q1105	K5	R308	H4	R415	*J4	R540	*E5	R664	C1	R868	*D4	R983	C4	R1163	*K5
C232	*F3	C530	*G4	C719	*C4	C1021	*J3	C1227	*P4	C1369	*N5	C1629	*P3	D1216	*K4	IC306	E5	IC1115	L5	Q1106	K5	R309	H4	R416	*J5	R541	*F4	R665	C1	R869	D4	R984	C4	R1164	*L5
C233	F3	C531	*G5	C720	*C4	C1022	*K3	C1228	*K1	C1370	*N5	C1630	*P3	D1217	K4	IC307	F5	IC1116	K5	Q1107	L5	R310	H4	R417	*J5	R542	E5	R666	C1	R870	*D4	R985	C4	R1165	*K5
C234	*E3	C532	*G4	C721	*D3	C1023	*L3	C1229	*K1	C1371	*N5	C1631	*P1	D1218	K4	IC308	G5	IC1117	L5	Q1108	L5	R311	H4	R418	*J5	R543	G5	R667	*D1	R871	*D4	R986	C4	R1166	*L5
C235	E3	C533	*G4	C722	*D3	C1024	*J2	C1230	*K1	C1372	*N5	C1632	*P1	D1219	*K3	IC309	H5	IC1200	M3	Q1200	*L4	R312	J4	R419	H5	R544	*H4	R668	*D1	R872	D4	R987	C4	R1167	*K5
C236	*G3	C534	*G4	C723	*D4	C1025	*L2	C1231	*K1	C1373	*N5	C1633	P2	D1220	K3	IC311	G5	IC1201	P3	Q1201	*L4	R313	H3	R420	H5	R545	G5	R669	*B1	R873	E4	R988	C4	R1168	*K5
C237	H4	C535	*G4	C724	*D4	C1026	*L2	C1232	L4	C1374	*N5	C1634	P2	D1221	K4	IC312	J5	IC1202	P4	Q1202	*P1	R315	J3	R421	H5	R546	*E5	R670	*B1	R874	D4	R989	C4	R1169	*K5
C238	*H3	C536	*G4	C725	C4	C1027	*K2	C1233	L4	C1375	N5	C1635	*P2	D1222	*K4	IC400	H2	IC1203	P5	Q1203	M3	R316	J3	R422	H5	R547	E5	R671	*B1	R875	D4	R990	C4	R1170	*K5
C239	G3	C537	*G4	C726	D4	C1028	K1	C1234	L4	C1376	N5	C1636	*P2	D1223	*K4	IC401	J4	IC1204	P5	Q1204	*P1	R317	J4	R423	H5	R548	H5	R672	*C1	R876	D4	R991	C4	R1171	*K5
C301	*H3	C538	*G4	C727	*D4	C1029	K2	C1235	K4	C1377	N5	C1637	*P1	D1224	M3	IC402	J5	IC1205	P4	Q1205	*M3	R318	J4	R424	H5	R549	H5	R673	A1	R877	*D4	R992	C4	R1172	*K5
C302	*J4	C539	*G4	C728	*C4	C1030	K2	C1236	P4	C1378	N5	C1638	*P1	D1225	P1	IC403	*H1	IC1206	*K1	Q1206	*P1	R319	J4	R425	J3	R550	H4	R674	A2	R878	*E4	R993	B4	R1173	K4
C303	*J4	C540	*G4	C729	*C4	C1031	K1	C1237	P4	C1379	N5	C1639	*N2	D1226	P1	IC404	*J5	IC1207	P4	Q1300	*N3	R320	J4	R426	J2	R551	H4	R676	A2	R879	*D4	R994	B4	R1174	K4
C304	*J4	C541	*G4	C730	*D4	C1032	*L1	C1238	*L4	C1380	N5	C1640	*P2	D1227	P1	IC405	*H2	IC1208	L4	Q1600	*P3	R321	J4	R427	J2	R552	G5	R677	*C1	R880	*D4	R995	B4	R1175	*L5
C305	*J4	C600	B2	C731	*D4	C1033	*L1	C1239	*L4	C1500	N2	C1641	*P2	D1228	*M3	IC406	*J5	IC1209	M3	Q1601	*P3	R322	J4	R428	J3	R553	H5	R678	A2	R881	*E4	R996	B4	R1176	*L5
C306	*J3	C601	B2	C732	*D4	C1034	L4	C1240	*K3	C1501	*N2	C1642	*P2	D1300	*N4	IC407	J4	IC1210	J2			R323	J4	R429	J2	R554	H5	R679	*C1	R882	*E4	R997	B4	R1177	*L5
C307	*H3	C602	B2	C733	*D4	C1035	L4	C1241	K3	C1502	N2	C1643	*N2	D1500	*M2	IC408	J5	IC1300	N3	R100	*E2	R324	J4	R430	J2	R555	H4	R680	*C1	R883	*E4	R998	B4	R1178	*L5

R1181	*L4	R1320	*L4	R1412	*N5	R1571	N2	R5015	F4	RB917	*D5
R1182	*L4	R1321	*L4	R1413	*N5	R1572	M2	R5016	*E4	RB918	*D5
R1183	*L4	R1322	*L4	R1414	*N5	R1573	N2	R5017	*E4	RB919	*C5
R1184	J3	R1323	*M5	R1415	*N5	R1574	M2	R5018	F4	RB920	*C5
R1185	J3	R1324	*M5	R1416	*N5	R1575	*N2	R5019	*F4	RB921	*C5
R1186	*J3	R1325	*M5	R1417	*N5	R1576	*N2	R5020	*F4	RB922	*C5
R1187	J3	R1326	*L5	R1418	*N5	R1577	*M2	R5021	*F4	RB924	*D5
R1188	J3	R1327	*M5	R1419	*N5	R1578	*M2	R5022	*H4	RB925	*D5
R1189	*J3	R1328	*M5	R1420	*N5	R1579	*N2	R5023	F4	RB928	*C5
R1190	L2	R1329	*M5	R1421	*N5	R1580	*M2	R5024	F4	RB929	*C5
R1191	*H5	R1330	*M5	R1422	*N5	R1581	*N2			RB937	*C4
R1192	M5	R1331	*L5	R1423	*N5	R1582	*M2	RB103	E2	RB938	*C5
R1193	*L2	R1332	*M5	R1424	*N5	R1583	*N2	RB104	E2	RB939	*C5
R1200	P3	R1333	*L5	R1425	*N5	R1584	*M2	RB105	*E2	RB940	*C4
R1202	*P5	R1334	*M5	R1426	*N5	R1600	*P1	RB106	*F2	RB941	*C5
R1203	*P5	R1335	*M5	R1427	*N5	R1601	*P1	RB107	*F2	RB942	*C5
R1204	*P5	R1336	*M5	R1428	*N5	R1602	P3	RB108	F2	RB943	B4
R1205	*P5	R1337	*M5	R1429	*N5	R1603	P4	RB109	F2	RB947	*B4
R1206	P3	R1338	*M5	R1430	*N5	R1604	*P1	RB110	F2	RB948	C4
R1208	*P5	R1339	*L5	R1431	*N5	R1605	*P1	RB111	F2	RB949	C4
R1209	*P5	R1340	*L5	R1432	*N5	R1606	*P1	RB112	F2	RB1000	*P1
R1210	*P5	R1341	*M5	R1500	*N3	R1607	*P2	RB113	F2	RB1002	*M1
R1211	*P5	R1342	*M5	R1501	*N3	R1608	*N3	RB114	F2	RB1004	N1
R1212	*P3	R1343	*L5	R1502	*N3	R1609	*P3	RB115	F2	RB1005	*L1
R1214	*P4	R1344	*M5	R1503	*N3	R1610	*N3	RB116	*H1	RB1006	M1
R1215	*P4	R1345	*L5	R1504	*N3	R1611	*P3	RB117	*G1	RB1007	M1
R1216	*P4	R1346	*L5	R1505	*N3	R1612	*N3	RB118	H1	RB1008	L1
R1217	*P4	R1347	*M5	R1506	*N3	R1613	*P3	RB119	H1	RB1009	*M1
R1218	*K1	R1348	*L5	R1507	N2	R1614	*P3	RB120	*E2	RB1010	*M1
R1219	P4	R1349	*L5	R1508	N2	R1615	*N3	RB121	*E2	RB1011	*M1
R1220	*K1	R1350	*M5	R1509	M2	R1616	*P3	RB301	*J4	RB1012	*M1
R1221	P4	R1351	*L5	R1510	M2	R1617	*P3	RB302	H4	RB1013	*M1
R1222	P4	R1352	*L5	R1511	*N2	R1618	*P3	RB303	H4	RB1014	*L1
R1223	P4	R1353	*M5	R1512	*M2	R1619	*P3	RB304	*J3	RB1015	*L1
R1224	P4	R1354	*L5	R1513	N2	R1620	*P3	RB305	*J3	RB1016	L1
R1225	P4	R1355	*L5	R1514	M2	R1621	*P3	RB306	*J4	RB1017	L1
R1226	*P4	R1356	*M5	R1515	*N2	R1622	*P1	RB307	*H3	RB1200	*P1
R1227	*K1	R1357	*M5	R1516	*M2	R1623	*P3	RB308	*F5		
R1228	*P4	R1358	*L5	R1517	*N2	R1624	*P3	RB309	*F5	RV1200	N1
R1229	*P4	R1359	*L5	R1518	*M2	R1625	*P1	RB310	*F5		
R1230	*P4	R1360	*N4	R1519	*N2	R1626	*P3	RB311	*G5	S100	G1
R1231	*K1	R1361	*N4	R1520	*M2	R1627	*P3	RB312	*G5	S101	H1
R1232	*K1	R1362	*N4	R1521	M2	R1628	*P1	RB313	*G5	S102	A1
R1233	L4	R1363	*N4	R1522	M2	R1629	P3	RB317	*E5	S600	A1
R1234	K4	R1364	*N4	R1523	*N2	R1630	P3	RB318	*F5	S601	A1
R1235	*L4	R1365	*N4	R1524	*M2	R1631	P3	RB319	*F5	S1000	P1
R1236	*L4	R1366	*N4	R1525	*N2	R1632	P3	RB320	*F5	S1200	N1
R1237	*L4	R1367	*N4	R1526	*N2	R1633	P3	RB321	*G5	S1201	N1
R1238	*P4	R1368	*N4	R1527	*M2	R1634	P3	RB322	*G5		
R1239	*K4	R1369	*N4	R1528	*M2	R1635	N1	RB323	*H5	TP100	A1
R1240	*L4	R1370	*N4	R1529	*N2	R1636	N1	RB324	*H5	TP400	J5
R1241	*K3	R1371	*N4	R1530	*N2	R1637	*P3	RB325	*J5	TP401	J4
R1242	*K3	R1372	N4	R1531	*M2	R1638	*P3	RB326	*J5	TP402	H2
R1243	*N1	R1373	N4	R1532	*M2	R1639	*P1	RB328	*H5	TP500	G4
R1244	*N1	R1374	*N4	R1533	*N2	R1640	*P1	RB329	*H5	TP501	G3
R1245	M3	R1375	*N4	R1534	*M2	R1641	*P1	RB332	*E5	TP502	G1
R1246	*P1	R1376	N4	R1535	*N2	R1642	*P1	RB333	*F5	TP503	H1
R1247	*M3	R1377	N4	R1536	M2	R1643	*P1	RB334	*F5	TP504	H1
R1248	*M3	R1378	*N4	R1537	N2	R1644	*P1	RB335	*F5	TP505	H1
R1249	*M3	R1379	N4	R1538	N2	R1645	P2	RB336	*G5	TP506	H1
R1250	*P1	R1380	*N4	R1539	M2	R1646	P2	RB337	*G5	TP507	H1
R1251	*M3	R1381	*N4	R1540	M2	R1647	N2	RB400	*H2	TP508	G4
R1252	*P1	R1382	*N4	R1541	*M2	R1648	P2	RB500	*E5	TP509	G3
R1253	*M3	R1383	*N4	R1542	M2	R1649	*P2	RB501	*E5	TP510	F4
R1254	*M3	R1384	*N4	R1543	*M2	R1650	*P2	RB502	*D5	TP511	F4
R1255	*L1	R1385	*N4	R1544	*N2	R1651	*P2	RB505	*F4	TP600	D1
R1256	*L1	R1386	*N4	R1545	M2	R1652	*P2	RB506	H4	TP601	D1
R1257	*M3	R1387	*N4	R1546	*N2	R1653	*P2	RB507	*F4	TP602	D1
R1258	M3	R1388	*N4	R1547	M2	R1654	*P2	RB508	H4	TP603	D1
R1259	M3	R1389	*N4	R1548	*M2	R1655	*P2	RB509	F4	TP700	D4
R1260	N1	R1390	*N4	R1549	*N2	R1656	*P2	RB510	H4	TP701	D3
R1261	K1	R1391	*N4	R1550	*M2	R1657	*P2	RB511	H4	TP703	D4
R1300	*M4	R1392	*N4	R1551	N2	R1658	*P2	RB602	A2	TP704	D4
R1301	*M4	R1393	*N4	R1552	M2	R1659	*P2	RB603	A2	TP705	D4
R1302	*M4	R1394	*N4	R1553	M2	R1660	*P2	RB604	*B2	TP706	C4
R1303	*M4	R1395	*N4	R1554	*N2	R1661	*P2	RB605	*B2	TP800	D4
R1304	*N3	R1396	*N4	R1555	*N2	R1662	*N2	RB607	*B2	TP801	D4
R1305	*N3	R1397	*N4	R1556	M2	R5000	*G4	RB608	A2	TP1000	M1
R1306	*N3	R1398	*N4	R1557	*M2	R5001	F4	RB609	C2	TP1001	M1
R1307	M4	R1399	*N4	R1558	*M2	R5002	*G4	RB610	C2	TP1100	K3
R1308	*N3	R1400	*N4	R1559	*M2	R5003	*G4	RB611	C2	TP1101	K3
R1309	M4	R1401	*N5	R1560	*N2	R5004	*F4	RB612	C2	TP1102	L2
R1310	*N3	R1402	*N5	R1561	*N2	R5005	*G4	RB613	C2	TP1104	L2
R1311	*N3	R1403	*N5	R1562	*M2	R5006	*E4	RB614	C2	TP1105	M1
R1312	*L4	R1404	*N5	R1563	N2	R5007	*E4	RB615	C2	TP1106	L2
R1313	M4	R1405	*N5	R1564	*N2	R5008	*F4	RB616	C2	TP1107	N1
R1314	*L4	R1406	*N5	R1565	*N2	R5009	*E4	RB617	*A1	TP1108	L2
R1315	M4	R1407	*N5	R1566	M2	R5010	*E4	RB618	*A1	TP1109	*P5
R1316	*L4	R1408	*N5	R1567	*M2	R5011	*F4	RB619	*A1	TP1200	P4
R1317	*L4	R1409	*N5	R1568	*M2	R5012	*F4	RB620	*A1	TP1201	P4
R1318	*L4	R1410	*N5	R1569	*N2	R5013	F4	RB915	*C5	TP1202	P4
R1319	*L4	R1411	*N5	R1570	*M2	R5014	F4	RB916	*C5	TP1203	P4

TP1204	L1										
TP1205	L1										
TP1206	M3										
TP1207	K1										
TP1300	L5										
TP1301	L5										
TP1302	M5										
TP1303	M5										
TP1304	N3										
TP1305	N3										
TP1306	N4										
TP1307	N4										
TP1308	N4										
TP1309	P4										
TP1500	N2										
TP1501	M2										
TP1502	N2										
TP1503	M2										
TP1600	N3										
TP1601	P3										
TP1602	P2										
TP1603	P2										
TP1604	P2										
TP1605	P2										
TP1606	P2										
TP1607	P2										
X101	E1										
X400	J1										
X401	H3										
X600	A1										
X700	*D3										
X1000	K3										
*:B SIDE											

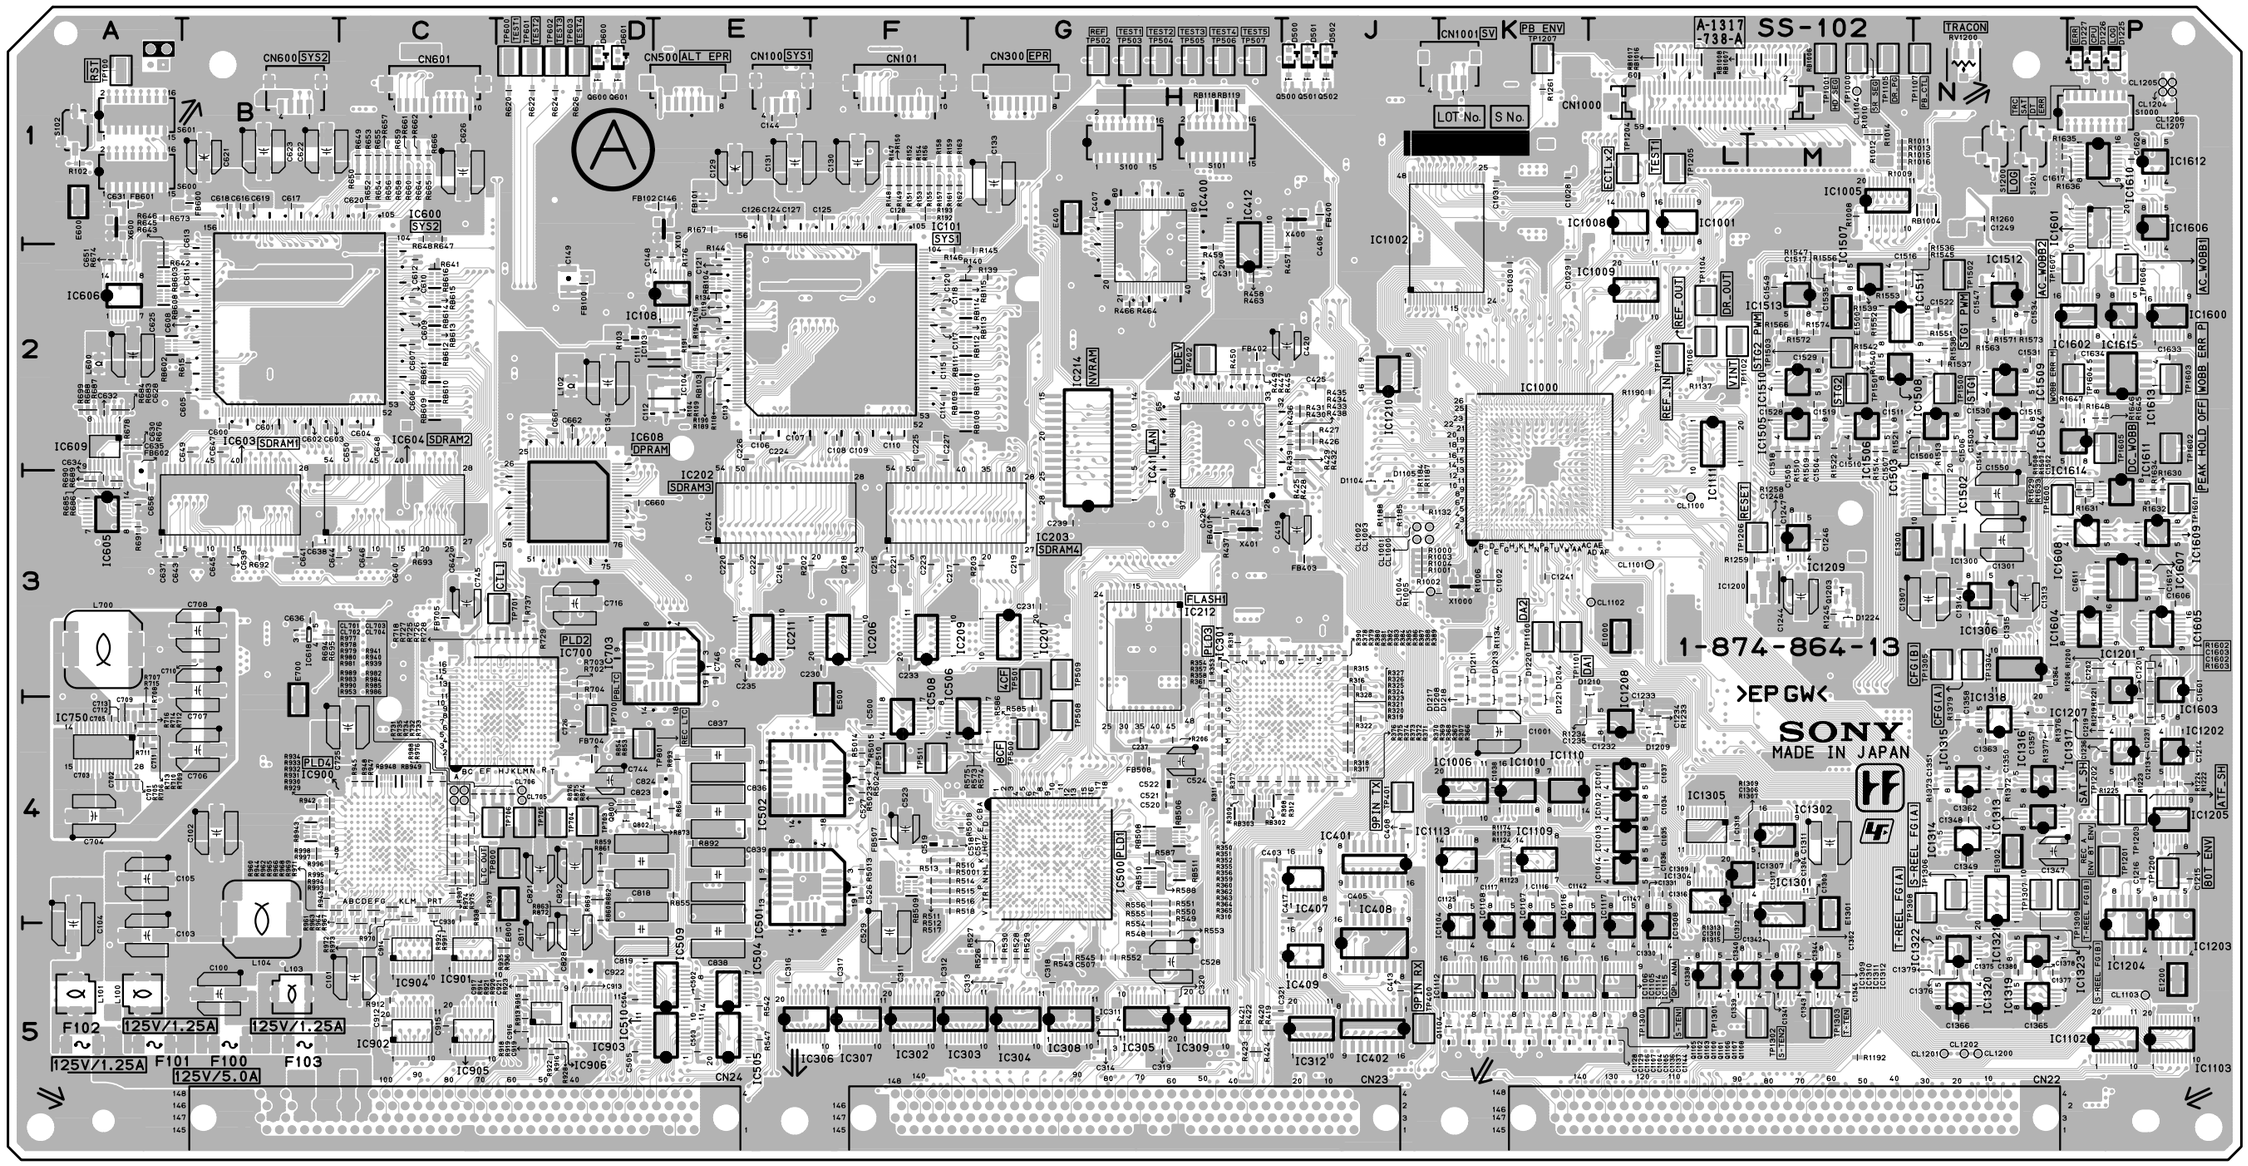
SS-102
A-1317
-738-A
1-874-864-13
SONY
MADE IN JAPAN
LOT No.
S No.
CN1000
IC1000
IC1002
IC1005
IC1006
IC1008
IC1009
IC1010
IC1012
IC1013
IC1014
IC1015
IC1016
IC1017
IC1018
IC1019
IC1020
IC1021
IC1022
IC1023
IC1024
IC1025
IC1026
IC1027
IC1028
IC1029
IC1030
IC1031
IC1032
IC1033
IC1034
IC1035
IC1036
IC1037
IC1038
IC1039
IC1040
IC1041
IC1042
IC1043
IC1044
IC1045
IC1046
IC1047
IC1048
IC1049
IC1050
IC1051

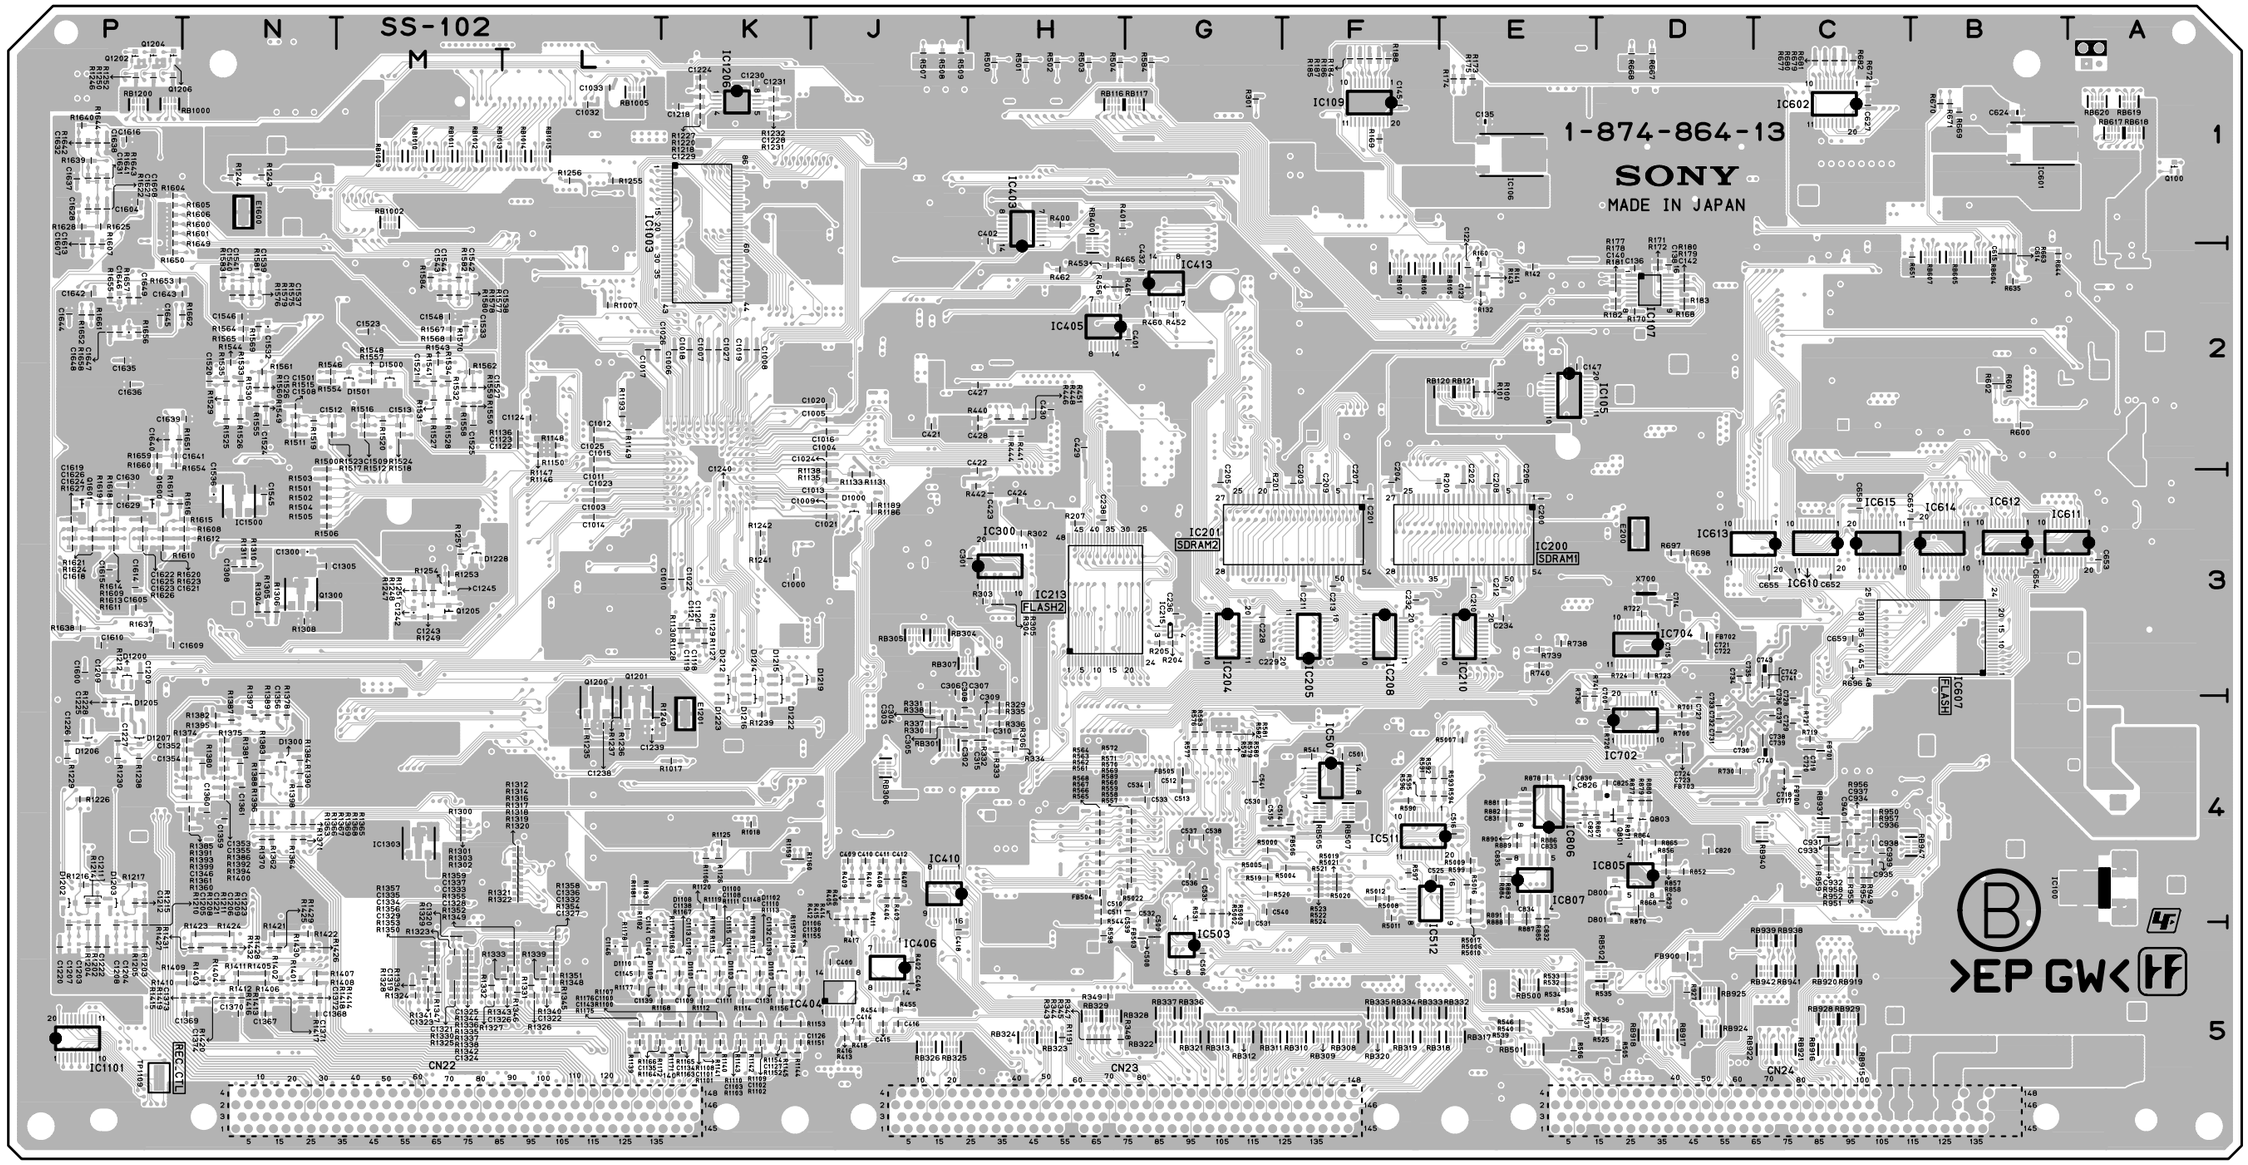

SS-102 -B SIDE-
SUFFIX: -13

SWC-46 (1-874-871-11)

C102	A1	R100	B1				
C103	A1	R101	B1				
		R102	B2				
CN1	A1	R103	B2				
CN2	B1	R104	A2				
		R105	B2				
D103	A1	R106	B2				
D104	A1	R107	A1				
D105	B1	R108	A1				
D106	A1	R109	B1				
D107	A2	R110	A1				
		R111	A2				
Q100	B1	R112	A2				
Q101	A2	R113	B2				
Q102	B2	R114	B2				
Q103	B2						
Q104	A1	S100	B1				
Q105	A1	S101	B2				
Q106	B1	S102	B2				
Q107	A1	S103	A2				
Q108	A2	S104	B2				
Q109	A2						

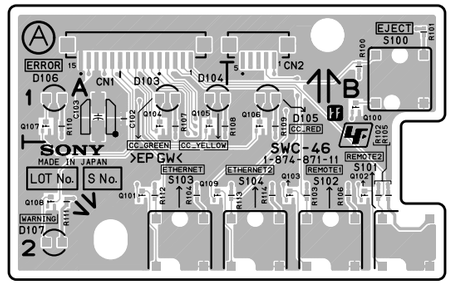

SWC-46 -A SIDE-
SUFFIX: -11

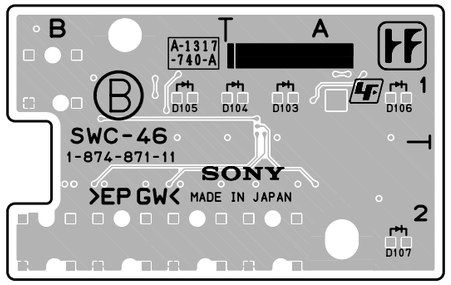

SWC-46 -B SIDE-
SUFFIX: -11

TC-104A (1-677-260-14)

C100	A1	D100	C1	R106	A1	T300	B3
C101	B1	D400	E3	R107	A1		
C102	B1	D401	D1	R108	C1	TP100	A1
C103	B1			R109	B1	TP101	A1
C104	B1	E100	A2	R110	B1	TP102	A4
C105	B1	E400	A3	R111	B1	TP200	A2
C106	B1			R112	B1	TP201	A2
C107	C1	IC100	A1	R113	B1	TP204	B2
C108	C1	IC101	B1	R114	B1	TP301	A3
C109	C1	IC102	B1	R115	B1	TP400	A3
C110	C1	IC103	B1	R116	C1	TP401	A4
C111	C1	IC104	C1	R117	C1		
C112	C1	IC105	C1	R118	C1		
C113	C1	IC200	D2	R119	C1		
C114	B1	IC300	C3	R120	C1		
C115	B1	IC400	D4	R121	C1		
C117	B1	IC401	D3	R122	C1		
C200	C2	IC402	D1	R123	C1		
C201	C2	IC403	E2	R124	C1		
C202	C2	IC404	E2	R125	C1		
C203	C2	IC900	D3	R126	C1		
C204	B2			R127	C1		
C205	B2	L200	C2	R200	D2		
C206	C2	L300	C2	R201	C2		
C209	A2	L400	D3	R202	B2		
C210	A2	L401	D2	R203	D2		
C211	C2			R205	D2		
C300	C3	LV200	A2	R206	C2		
C301	C3			R207	C2		
C302	C3	PS400	D4	R208	C2		
C303	C3	PS401	D4	R209	C2		
C304	B3	PS402	D2	R210	A2		
C305	B3			R211	B2		
C307	C3	Q100	A1	R212	D2		
C308	C3	Q101	B1	R213	B2		
C400	D3	Q102	B1	R300	C3		
C401	D2	Q200	D2	R301	C3		
C402	D3	Q203	C2	R302	C3		
C403	D3	Q205	C2	R303	C3		
C404	D2	Q206	C2	R304	C3		
C405	C2	Q300	C3	R305	C3		
C406	C3	Q302	C3	R306	C3		
C407	E2	Q303	C3	R307	A3		
C408	E2	Q304	C3	R401	D2		
C411	E3	Q401	D2	R402	E2		
C412	D2	Q402	E2	R403	E2		
C413	D3	Q900	D2	R404	E1		
C414	E2	Q901	C3	R405	E1		
C902	B1			R900	B1		
		R100	A1	R901	C3		
CN100	A1	R101	A1	R902	C3		
CN200	C4	R102	B1				
CN300	A3	R103	B1	RB401	C4		
CN500	B3	R104	B1				
CN600	B4	R105	A1	T200	C2		

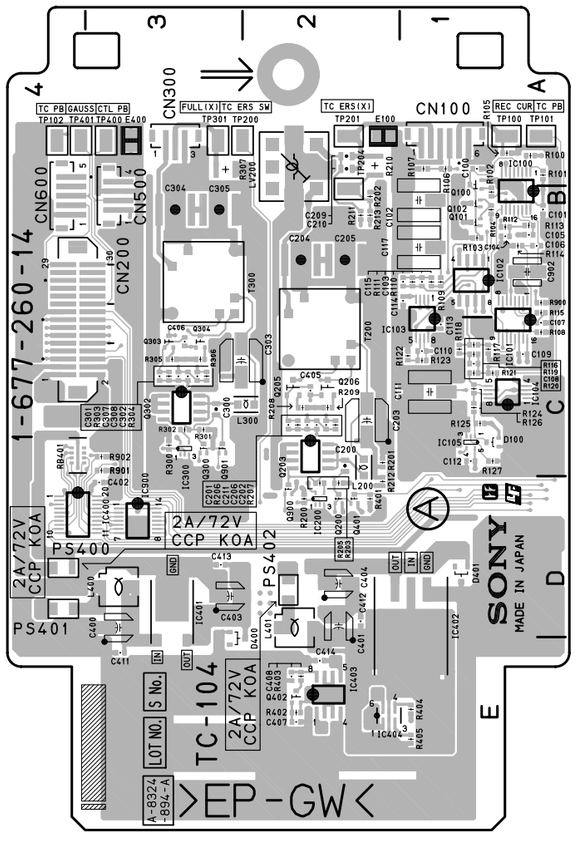

TC-104A -A SIDE-
SUFFIX: -14

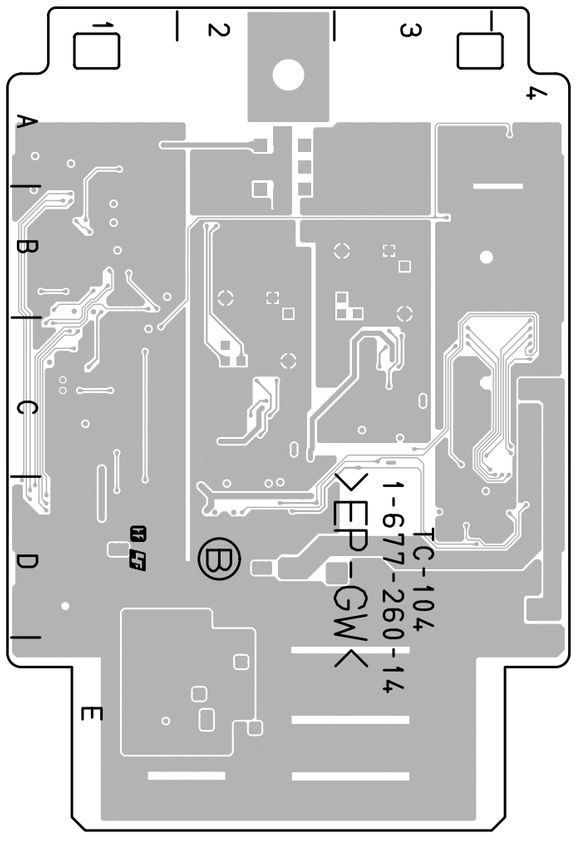

TC-104A -B SIDE-
SUFFIX: -14

TC-112A (1-871-428-11)

C100	A1	D100	C1	R106	A1	T300	B3
C101	B1	D400	E3	R107	A1		
C102	B1	D401	D1	R108	C1	TP100	A1
C103	B1			R109	B1	TP101	A1
C104	B1	E100	A2	R110	B1	TP102	A4
C105	B1	E400	A3	R111	B1	TP200	A3
C106	B1			R112	B1	TP201	A2
C107	C1	IC100	A1	R113	B1	TP204	B2
C108	C1	IC101	B1	R114	B1	TP301	A3
C109	C1	IC102	B1	R115	B1	TP400	A3
C110	C1	IC103	B1	R116	C1	TP401	A4
C111	C1	IC104	C1	R117	C1		
C112	C1	IC105	C1	R118	C1		
C113	C1	IC200	D2	R119	C1		
C114	B1	IC300	C3	R120	C1		
C115	B1	IC400	D4	R121	C1		
C117	B1	IC401	D3	R122	C1		
C200	C2	IC402	D1	R123	C1		
C201	C2	IC403	E2	R124	C1		
C202	C2	IC404	E2	R125	C1		
C203	C2	IC900	D3	R126	C1		
C204	B2			R127	C1		
C205	B2	L200	C2	R200	D2		
C206	C2	L300	C2	R201	C2		
C209	A2	L400	D3	R202	B2		
C210	A2	L401	D2	R203	D2		
C211	C2			R205	D2		
C300	C3	LV200	B2	R206	C2		
C301	C3			R207	C2		
C302	C3	PS400	D4	R208	C2		
C303	C3	PS401	D4	R209	C2		
C304	B3	PS402	D2	R210	A2		
C305	B3			R211	B2		
C307	C3	Q100	A1	R212	D2		
C308	C3	Q101	B1	R213	B2		
C400	D3	Q102	B1	R300	C3		
C401	D2	Q200	D2	R301	C3		
C402	D3	Q203	C2	R302	C3		
C403	D3	Q205	C2	R303	C3		
C404	D2	Q206	C2	R304	C3		
C405	C2	Q300	C3	R305	C3		
C406	C3	Q302	C3	R306	C3		
C407	E2	Q303	C3	R307	A3		
C408	E2	Q304	C3	R401	D2		
C411	E3	Q401	D2	R402	E2		
C412	D2	Q402	E2	R403	E2		
C413	D3	Q900	D2	R404	E1		
C414	E2	Q901	C3	R405	E1		
C902	B1			R900	B1		
		R100	A1	R901	C3		
CN100	A1	R101	A1	R902	C3		
CN200	C4	R102	B1				
CN300	A3	R103	B1	RB401	C4		
CN500	B3	R104	B1				
CN600	B4	R105	A1	T200	C2		

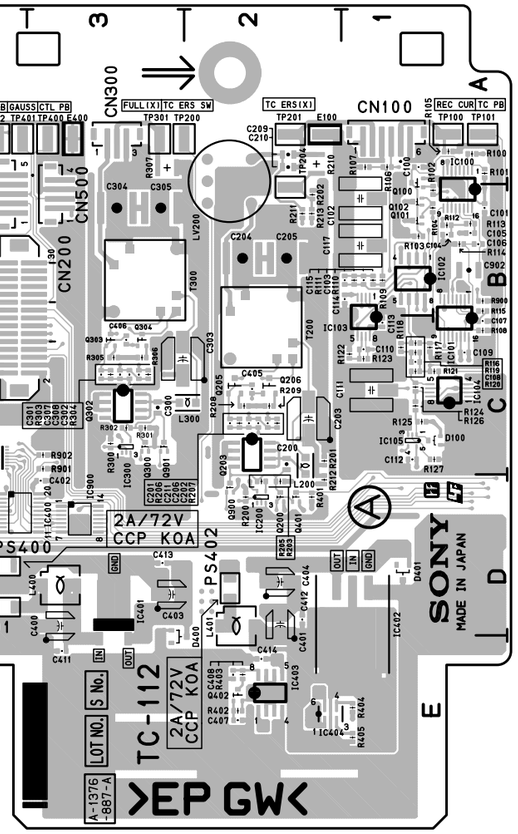

TC-112A -A SIDE-
SUFFIX: -11

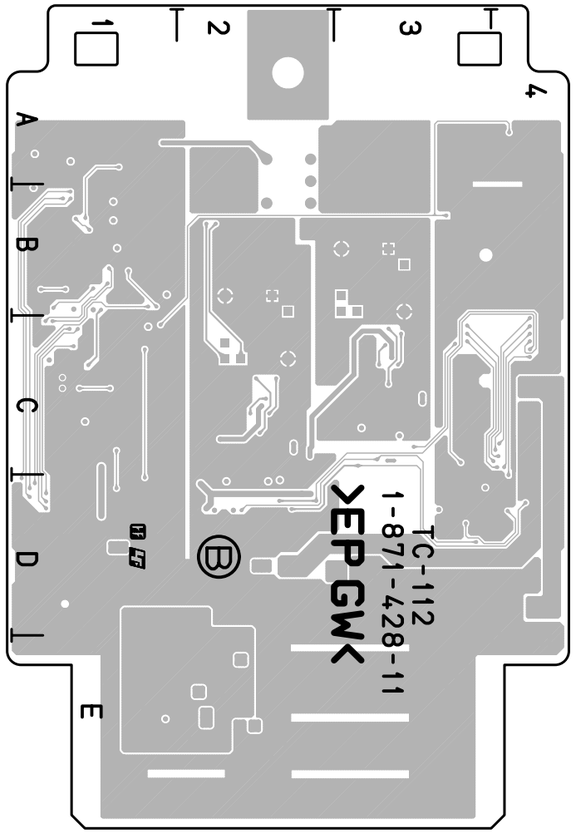

TC-112A -B SIDE-
SUFFIX: -11

DVP-43 (1-874-865-11)

C100	L5	C305	G1	C511	*F3	C606	E1	C720	*H4	C812	J5	C1040	*L3	C1212	*A1	C1428	A3	C7006	H3	CL416	P2	CL607	D1	CL1137	C2	IC104	*L5	IC1309	*D5	R206	K2	R510	G3	R723	F4
C101	K5	C306	H1	C512	*F3	C607	E1	C721	*H4	C813	K5	C1041	*L3	C1213	*C2	C1429	A3	C7008	H4	CL417	P2	CL608	D1	CL1138	A2	IC105	*L4	IC1310	*D5	R207	*H2	R511	F2	R724	*F4
C102	*L5	C307	*H1	C513	*F3	C608	E1	C722	*G4	C814	*J4	C1042	*L3	C1214	*C2	C1430	F1	C7009	F4	CL418	P2	CL609	D1	CL1139	B1	IC106	L4	IC1311	*C3	R208	K2	R512	*F2	R725	F4
C103	*L5	C308	*H1	C514	*F3	C609	E1	C723	*G4	C815	*J5	C1043	*L3	C1215	*C2	C1431	*A3	C7010	*F4	CL419	P2	CL610	D1	CL1140	B1	IC107	N4	IC1312	*D3	R209	*L2	R513	*F2	R726	*F4
C104	L4	C309	*H1	C515	*F3	C610	E1	C724	*G4	C903	*J4	C1044	*L3	C1216	*C2	C1432	E1	C7011	*F4	CL420	P2	CL611	D1	CL1141	B1	IC108	L4	IC1315	*C4	R210	*L2	R514	*F2	R727	F4
C105	L5	C310	*H1	C516	*F3	C611	D1	C725	*G4	C904	*J4	C1045	*L3	C1217	*C2	C1433	N3	C7012	F4	CL421	P2	CL612	D1	CL1142	B1	IC109	*M4	IC1317	D4	R211	*L2	R515	*F2	R728	*F4
C107	*L5	C311	*J1	C517	*F3	C612	D1	C726	*G4	C905	*J4	C1046	L2	C1218	*C2	C1434	A3	C7013	H3	CL422	P2	CL613	D3	CL1143	B1	IC110	*L4	IC1319	*D5	R212	*L2	R516	*F2	R729	F4
C109	*L5	C312	*J1	C518	*F3	C613	D1	C727	*G4	C906	*J4	C1047	L2	C1219	*B2	C1435	*A3			CL423	P2	CL614	D3	CL1144	B2	IC200	L3	IC1320	*D4	R213	*L3	R517	*F2	R730	*F4
C111	L5	C313	*J1	C519	*F3	C614	D1	C728	*G4	C907	*K4	C1048	*L2	C1220	*B2	C1436	P3	CL100	*L5	CL424	N2	CL615	D2	CL1145	B2	IC201	J2	IC1400	B3	R214	*L3	R518	F3	R731	F4
C112	L5	C314	*J1	C520	*F3	C615	D1	C729	*G4	C908	*J4	C1049	*L2	C1222	*B2	C1437	E1	CL101	*L5	CL425	N2	CL616	D3	CL1146	B1	IC202	*J4	IC1401	C1	R215	*L2	R519	F2	R732	*F4
C113	K4	C315	*K1	C521	*F3	C616	D1	C730	*G4	C909	*K4	C1050	*L3	C1226	C2	C1438	E1	CL102	*L5	CL426	N2	CL617	D2	CL1147	B1	IC203	*J4	IC1402	N3	R216	*L2	R520	*F2	R733	F4
C114	*L5	C316	*J1	C522	*F3	C617	D1	C731	*G4	C910	*K4	C1051	*L3	C1227	C2	C1441	A5	CL103	*L5	CL427	N2	CL618	D3	CL1148	B2	IC204	*K4	IC1403	A3	R217	*L2	R521	F2	R734	*F4
C115	L5	C317	*K1	C523	*F3	C618	D1	C732	*H4	C911	*K4	C1052	*M3	C1228	*C2	C1443	A1	CL104	*L5	CL428	N2	CL619	D3	CL1149	A1	IC205	J3	IC1404	*F1	R218	L2	R522	F3	R735	H3
C116	L5	C318	*K1	C524	*F3	C619	D1	C733	*H4	C912	*K4	C1053	*M3	C1229	C2	C1444	*A1	CL105	L5	CL429	N2	CL620	E2	CL1150	A1	IC206	J3	IC1406	A1	R219	*L2	R523	F3	R736	H3
C117	*L5	C319	*L1	C525	*F2	C620	D1	C734	*G4	C913	*K4	C1054	*M2	C1233	*C1	C1445	A1	CL106	L5	CL430	N2	CL621	E2	CL1151	A1	IC207	*H2	IC1408	E4	R220	J4	R524	F3	R737	H3
C118	L5	C320	*K1	C526	*F3	C621	D1	C735	*G4	C914	*K4	C1055	*L3	C1236	*A1	C1446	A1	CL107	*L5	CL431	N2	CL622	D3	CL1152	A1	IC300	H2	IC1409	H3	R221	*H2	R525	*F2	R738	H3
C119	L5	C321	*L1	C527	*F3	C622	E1	C736	*H4	C946	*K4	C1056	*L3	C1237	*N5	C1447	N3	CL108	L4	CL432	N2	CL623	*D3	CL1200	C2	IC301	H2			R301	*H1	R526	*G2	R739	H3
C120	M5	C322	*L1	C528	*F3	C623	E1	C737	*G4	C949	*J4	C1057	*L3	C1238	N5	C1448	P3	CL109	L4	CL433	N2	CL624	D3	CL1201	*B2	IC302	H3	L701	*G3	R302	*H2	R527	*G2	R740	H3
C121	*K5	C323	J1	C529	*G3	C624	E1	C738	*G4	C952	*J4	C1058	*L3	C1240	N5	C1451	E4	CL110	*L4	CL434	N2	CL625	*D3	CL1202	*E5	IC303	*H1	L702	*G3	R303	H2	R528	F2	R741	*G4
C122	*L4	C324	H1	C530	*G2	C625	E1	C739	*G4	C955	*J4	C1059	*L2	C1241	M5	C1452	E4	CL111	*L4	CL435	N2	CL626	*D2	CL1300	*D4	IC304	*J1	L1400	C4	R304	*J2	R529	F2	R742	*G3
C123	*L4	C325	J1	C531	*F3	C626	E2	C740	*G4	C963	*J4	C1060	*L3	C1242	E5	C1453	E4	CL112	*M4	CL436	N2	CL627	*D2	CL1301	*D4	IC305	*K1	L1401	B4	R305	*J2	R530	F2	R743	*H3
C124	*L4	C326	J1	C532	*F3	C627	D2	C741	*G4	C964	*J4	C1061	*L3	C1243	*M5	C1454	E4	CL113	*L4	CL437	N2	CL628	D3	CL1302	*D4	IC306	*K1	L1402	B4	R306	*G3	R531	F2	R744	G3
C125	*L4	C400	*M1	C533	*F3	C628	D2	C742	*G4	C965	*J4	C1062	*L2	C1244	*C1	C1455	H3	CL114	*L4	CL438	*P2	CL629	E2	CL1303	E4	IC307	J1	L1403	A4	R307	*G2	R532	F2	R745	*G4
C128	*M4	C401	*N1	C534	*F3	C629	*D2	C743	*G4	C966	*J4	C1063	*L2	C1245	*C2	C1456	G3	CL115	*L4	CL439	P3	CL701	G4	CL1400	A3	IC400	N2	L1404	B4	R308	G1	R533	F2	R746	*G4
C129	*L4	C402	*M1	C535	*F3	C630	*D2	C744	*G4	C967	*J4	C1064	*L2	C1246	C2	C1457	G3	CL116	*L4	CL440	P3	CL702	G4			IC401	*M1	L1405	A4	R309	*H1	R534	G2	R747	*G4
C130	*L4	C403	*N1	C536	*F3	C631	*E2	C745	*H4	C968	*K4	C1065	*L2	C1247	C2	C1458	G3	CL117	*L4	CL441	P3	CL703	G4	CN13	M5	IC402	*N1	L1406	H3	R310	*H3	R535	G1	R748	*G4
C131	*M4	C404	*M1	C537	*F3	C632	*E2	C746	*H4	C969	*K4	C1066	L2	C1300	*C5	C1459	H3	CL118	*L4	CL442	P3	CL704	*G4	CN14	G5	IC403	*P1			R311	J3	R536	G2	R749	*G4
C132	*L4	C405	*M1	C538	*F3	C633	*D2	C747	*G4	C970	*J4	C1067	L2	C1301	*C5	C1460	H3	CL119	L4	CL443	P2	CL705	*G3	CN15	C5	IC404	*M3	Q1201	C2	R312	*H2	R537	G2	R750	*G4
C133	*L4	C406	*M1	C539	*F3	C634	*D2	C748	*H4	C971	*J4	C1068	L2	C1302	C5	C1461	H3	CL120	*L4	CL444	P2	CL706	*G3	CN200	L1	IC405	*N3	Q1202	C2	R400	M2	R538	G2	R751	*G4
C134	*L4	C407	*M1	C540	*F3	C635	*E2	C749	*H4	C972	*K4	C1069	*B1	C1303	C5	C1462	H3	CL121	L4	CL445	P2	CL707	*G3	CN1000	B1	IC406	M2	Q1400	A3	R401	*N2	R539	F1	R752	H4
C135	*L4	C408	*M1	C541	*F3	C636	*E2	C750	*H4	C973	*J4	C1100	*F5	C1304	D5	C1463	H3	CL122	L4	CL446	P2	CL708	F3			IC500	F3	Q1401	A3	R402	*M2	R540	*F1	R753	H4
C136	*M4	C409	*M1	C542	*F3	C637	*E2	C751	*H4	C974	*K4	C1101	F5	C1305	*C5	C1464	G3	CL123	L4	CL447	P2	CL709	G3	D1400	A3	IC501	*F2	Q1402	M1	R403	*N2	R541	*F1	R754	H4
C137	*L4	C410	*M1	C544	*G2	C638	*E2	C752	*H4	C975	*K4	C1102	A2	C1306	C1	C1465	H3	CL124	M4	CL448	P2	CL710	F3	D1401	A3	IC502	*F1	Q1403	L1	R404	*N2	R542	*F1	R755	H4
C138	*L4	C411	*M1	C545	F2	C639	*D2	C753	*H4	C976	*J4	C1103	A2	C1307	*C4	C1466	J3	CL125	M4	CL449	P2	CL711	G3	D1402	M1	IC503	F1	Q1404	L1	R405	*N2	R543	*F1	R756	H4
C139	L4	C412	*M1	C546	F2	C640	*D2	C754	*G4	C977	*J4	C1104	B3	C1308	*C5	C1467	H3	CL126	*L4	CL450	P2	CL712	G3	D1403	L1	IC600	D1	Q1405	M1	R406	*M2	R544	*F1	R757	H4
C140	*M4	C413	*M1	C547	*F2	C641	*D1	C755	*G4	C978	*J4	C1105	A2	C1309	D4	C1500	*J4	CL127	L4	CL451	P2	CL713	G3	D1404	L1	IC601	*D2	Q1406	M1	R407	*M2	R545	*F1	R758	H4
C141	*M4	C414	*M1	C548	*G2	C642	*D1	C756	*G4	C979	*J4	C1106	B2	C1310	D5	C1501	*J4	CL128	M4	CL452	P2	CL714	*G3	D1405	M1	IC602	*D1	Q1407	*A3	R408	*N2	R546	F2	R759	G3
C142	*M4	C415	*M1	C549	G2	C643	C2	C757	*H4	C980	*J4	C1107	B2	C1314	D4	C1502	*J4	CL129	L4	CL453	P3	CL715	*G4	D1406	L1	IC603	*D1	Q1408	*A3	R409	*M1	R547	F1	R760	G3
C143	*L4	C416	*P1	C550	F2	C644	*D3	C758	*H4	C981	*J4	C1108	B2	C1315	C4	C1503	*J4	CL130	L4	CL454	P3	CL717	*G3			IC604	D2			R410	*N1	R548	*F1	R761	*H4
C144	*M4	C417	*P1	C551	*F2	C645	*D2	C759	*G4	C982	*J4	C1109	B1	C1316	*D5	C1504	*K4	CL131	M4	CL455	*N3	CL718	*G3	E1400	C1	IC605	D3	R100	*L5	R411	*M1	R549	F1	R762	*H4
C145	L3	C418	*N1	C552	*F2	C646	*D2	C760	*G4	C983	*J4	C1110	B1	C1317	*C3	C1505	*K4	CL132	M4	CL456	N3	CL719	G3	E1401	G1	IC606	D3	R101	*L5	R412	*N1	R550	F2	R763	H4
C146	*L3	C419	*N1	C553	F2	C647	*D2	C761	*G4	C984	*J4	C1111	A2	C1318	*D5	C1506	*K4	CL133	*L4	CL457	N3	CL720	G3	E1402	P1	IC607	D3	R102	*L5	R413	*P1	R551	F2	R764	H4
C147	N4	C420	*P1	C554	F2	C648	*D3	C762	*G4	C985	*J4	C1112	A2	C1319	*D5	C1507	*J4	CL134	*L4	CL458	N3	CL721	*G3	E1403	*C3	IC700	G4	R103	*L5	R414	*P1	R552	F1	R765	*H4
C148	N4	C421	*N1	C555	G2	C649	*D3	C763	*G4	C986	*J4	C1113	A2	C1320	*D3	C1508	*J4	CL135	M4	CL459	N3	CL722	*G3	E1404	D2	IC701	F4	R104	*L5	R415	*P1	R553	*F1	R766	*H4
C149	N4	C422	*N1	C558	*F2	C650	*D3	C764	*G4	C987	*J4	C1114	B2	C1322	*D4	C1509	J4	CL136	M4	CL460	N3	CL723	H4	E1405	*L2	IC702	*F4	R105	L5	R416	M2	R554	*G1	R767	H4
C150	N4	C423	*N1	C559	*F2	C651	*D3	C765	*G4	C992	*J5	C1115	B2	C1323	*D4	C1510	*J5	CL137	M4	CL461	N3	CL724	H4	E1406	C3	IC703	H3	R106	*K5	R417	M2	R555	*G1	R768	H4
C151	M5	C424	*P1	C560	*F2	C652	*D3	C766	*G4	C993	*J4	C1116	B2	C1324	*D4	C1512	*H4	CL138	M4	CL462	N3	CL725	H4	E1407	*G1	IC800	J5	R107	L5	R418	*M2	R600	E2	R769	H4
C152	M4	C425	M2	C561	*F1	C653	*D3	C767	*G4	C994	*J4	C1117	B2	C1325	*D4	C1513	*H4	CL139	M4	CL463	N3	CL726	H4	E1408	K3	IC1000	P4	R108	*K5	R419	*M2	R601	E2	R770	H4
C153	M4	C426	*N2	C562	*F1	C654	*D2	C768	*G3	C995	*J4	C1118	B2	C1326	*D4	C1514	H4	CL140	M4	CL464	N3	CL727	H4	E1409	*N4	IC1001	B1	R109	K5	R420	P3	R602	E2	R771	H3
C154	*L3	C427	*N2	C563	*F1	C655	*D3	C769	*G4	C996	*J4	C1119	B2	C1327	*D4	C1515	*H4	CL141	M4	CL465	N2	CL728	H4	E1410	E5	IC1002	D5	R110	L4	R421	N3	R603	E2	R772	H4
C155	M4	C428	*N2	C564	*F1	C656	*D3	C770	*G4	C997	*J4	C1120	B1	C1328	*D4	C1520	*J5	CL142	*M4	CL466	P2	CL729	H4	E1411	*F5	IC1003	C1	R111	L5	R422	P3	R604	E2	R773	H4
C156	M5	C429	*N2	C565	*F1	C657	*E2	C771	*G4	C998	*J4	C1121	B1	C1329	*D4	C1521	*J4	CL143	L4	CL467	P2	CL730	H4	E1412	*K3	IC1005	*C1	R112	M5	R423	*M2	R605	E2	R774	H4
C157	M4	C430	*N3	C566	*F1	C658	*D3	C772	*G4	C999	*J4	C1122	B1	C1330	*D4	C1522	*K4	CL144	L4	CL468	P2	CL1000	P4	E1413	M2	IC1007	L2	R113	M5	R424	N3	R606	E2	R775	H5
C158	M4	C431	*N2	C567	*F1	C659	*D3	C773	*G4	C1000	C1	C1123	A1	C1331	*E4	C1523	*K4	CL145	*L4	CL469	P2	CL1001	P4	E1414	L5	IC1008	L2	R114	M5	R425	*M2	R607	E2	R776	H5
C159	M4	C432	*N2	C568	*F2	C660	*D2	C774	*G4	C1001	D5	C1124	A2	C1332	*E4	C1524	*K4	CL146	M4	CL470	M2	CL1002	P4	E1415	M4	IC1009	B1	R115	M5	R426	P3	R608	E2	R777	G5
C162	L4	C433	*N2	C569	*F2	C661	*D2	C775	*G4	C1002	C1	C1125	A2	C1333	*E3	C1525	*K4	CL147	M4	CL471	M2	CL1100	C2			IC1011	*P5	R116	M5	R427	P2	R609	E2	R778	G5
C163	L4	C434	*N3	C570	*F2	C662	*D2	C776	*G4	C1004	*C1	C1126	B2	C1334	*D4	C1526	*J4	CL200	H2	CL472	*N2	CL1101	B2	F1400	B5	IC1012	*B1	R117	M5	R428	M2	R610	*D2	R779	H5
C200	*J3	C435	*N3	C571	*F1	C663	*D2	C777	*G4	C1005	C1	C1127	B1	C1335	*D4	C1527	*K4	CL201	H2	CL473	M3	CL1102	C2	F1401	B5	IC1100	B2	R118	L4	R429	*M2	R611	*D1	R780	H5
C201	*J3	C436	*N2	C572	*F1	C664	*D2	C778	*G4	C1006	*P4	C1128	B1	C1336	*D3	C1528	*K4	CL202	H2	CL474	M3	CL1103	C2	F1402	A5	IC1101	*F5	R119	K4	R430	M3	R612	*D1	R800	*J5
C202	*K3	C437	*N3	C573	*F1	C665	*D3	C779	*G4	C1007	*P5	C1129	A2	C1337	*D4	C1529	*J4	CL203	H2	CL475	*M3	CL1104	C2			IC1102	H5	R120	*K5	R431	*M2	R613	D2	R801	J5
C203	J3	C438	*N2	C574	*F1	C666	*D3	C780	*G4	C1008	*P4	C1130	A2	C1338	*D4	C1530	*K4	CL204	H2	CL476	*M3	CL1105	C2	FB100	L4	IC1103	*B2	R121	*K5	R432	M3	R614	D3	R802	J5
C204	J3	C439	*N3	C575	*F1	C667	*D3	C781	*G4	C1009	*P4	C1131	A2	C1339	*D4	C1531	*K4	CL205	H2	CL477	*M3	CL1106	B2	FB101	L5	IC1104	G5	R122	*L4	R433	*M3	R615	D3	R803	J5
C205	H3	C440	*N2	C576	*F1	C668	*D2	C782	*G4	C1010	*P4	C1132	A2	C1340	*D4	C1532	*K4	CL206	H2	CL478	*M3	CL1107	B2	FB102	L5	IC1105	H5	R123	*L4	R434	*M3	R616	D2	R804	*K5
C206	J3	C441	*N2	C577	*F2	C669	*D2	C783	*G4	C1011	*P4	C1133	A2	C1341	*D3	C1533	*K4	CL207	H2	CL500	G3	CL1108	B2	FB800	*J5	IC1106	C2	R124	*L4	R435	M3	R617	*D2	R805	*K5
C207	J3	C442	*N3	C578	*F1	C670	*D2	C784	F4	C1012	*N4	C1134	A2	C1343	*D5	C1534	*J4	CL208	H2	CL501	F3	CL1109	B2	FB801	*J5	IC1107	H5	R125	*L4	R436	M3	R618	D2	R806	*K5
C208	J3	C443	*N2	C579	*F1	C671	*D2	C785	*F4	C1013	*P4	C1135	B2	C1344	*D4	C1535	*K4	CL209	H2	CL502	G2	CL1110	B2	FB900	*K5	IC1108	G5	R126	L4	R437	*M3	R619	D2	R807	*J5
C209	J3	C444	*N2	C580	*F1	C672	*D3	C786	F4	C1014	*P4	C1136	C1	C1345	*D5	C1536	*J4	CL210	H2	CL503	G2	CL1111	A2	FB901	J4	IC1109	C1	R127	L4	R438	*M3	R620	D3	R808	J5
C210	J2	C445	*N2	C581	*F1	C673	*D3	C787	*F4	C1015	*P4	C1137	G5	C1346	*D4	C1537	*K4	CL211	K2	CL504	F3	CL1112	B1	FB902	*J4	IC1110	G5	R128	L4	R439	*M3	R621	D2	R809	J5
C211	H2	C446	M2	C582	*F1	C674	*D3	C788	F4	C1016	*P4	C1138	*B2	C1400	C5	C1538	*J4	CL212	H2	CL505	F2	CL1113	B2	FB1000	*L2	IC1200	*C2	R129	L4	R440	*M3	R622	D2	R810	*K5
C212	H3	C447	*M3	C583	*F1	C675	C3	C789	*F4	C1017	*N4	C1139	G5	C1401	B5	C1539	*J4	CL213	H2	CL506	F2	CL1114	A2	FB1001	*L2	IC1201	*C2	R130	*L4	R441	M2	R623	E2	R811	J5
C213	J3	C448	*N3	C584	*F1	C676	E3	C790	F4	C1018	*P4	C1140	*B2	C1402	C4	C1540	*J4	CL214	H2	CL507	F2	CL1115	A2	FB1100	A2	IC1202	*N5	R131	L4	R442	M2	R701	G4	R812	J5
C214	J3	C449	*M3	C585	*F1	C677	D3	C791	*F4	C1019	*P4	C1141	G5	C1403	B4	C1541	*J4	CL215	H2	CL508	F3	CL1116	B2	FB1105	*B2	IC1203	N5	R132	L4	R443	M2	R702	G4	R813	J5
C215	J3	C450	*P3	C586	*F1	C678	D3	C792	F4	C1020	*P4	C1148	*B2	C1404	B4	C1542	*J4	CL216	H2	CL509	G3	CL1117	A2	FB1106	G5	IC1205	N5	R133	L4	R444	M2	R703	G4	R814	*K5
C216	K2	C451	*M3	C587	*G1	C701	G3	C793	*F4	C1021	*P4	C1149	G5	C1405	A4	C5000	*F2	CL217	H2	CL510	G3	CL1118	A2	FB1107	C2	IC1206	M5	R134	L4	R445	*L3	R704	*G4	R815	*J5
C217	K2	C452	*N3	C588	*G1	C702	G3	C794	F4	C1022	*P4	C1150	H5	C1406	*C4	C5001	*G1	CL218	H1	CL511	G1	CL1119	A2	FB1200	*B1	IC1207	E5	R135	L4	R446	*L3	R705	*G4	R816	*J5
C218	K2	C453	*M3	C589	*F2	C703	*G4	C795	*F4	C1023	*P4	C1151	B3	C1407	*B4	C5002	F1	CL219	H1	CL512	F2	CL1120	A2	FB1201	*B1	IC1208	*M5	R136	L4	R447	*L3	R706	G4	R817	*J4
C219	K2	C454	*N3	C590	*F2	C704	*G4	C796	F4	C1024	*P4	C1152	C2	C1408	*B4	C5003	F1	CL400	M2	CL513	G1	CL1121	A2	FB1202	*B1	IC1209	*C2	R137	*L4	R448	*M3	R707	G4	R818	*J5
C220	J2	C455	*M3	C591	*F2	C705	*G4	C797	*F4	C1025	*P4	C1156	B2	C1409	*A4	C5004	*F1	CL401	M2	CL514	G1	CL1122	A2	FB1203	*A1	IC1210	*B2	R138	L4	R449	*N3	R708	G4	R819	*J4
C221	J2	C456	*N3	C592	*F2	C706	*H4	C798	F4	C1026	*P4	C1157	H5	C1410	B3	C5005	*G1	CL402	M2	CL515	F2	CL1123	A1	FB1204	*C2	IC1211	*C2	R139	M4	R450	M3	R709	G4	R820	*J4
C222	J2	C457	*M3	C593	*F2	C707	*G4	C799	*F4	C1027	*P4	C1158	H5	C1411	B3	C5006	G1	CL403	M2	CL516	F1	CL1124	B1	FB1205	*B2	IC1212	*B1	R140	L4	R451	M3	R710	G4	R821	*J4
C223	H2	C458	*N3	C594	*F2	C708	*G4	C800	J5	C1028	K2	C1200	*B2	C1412	C1	C5007	F1	CL404	M2	CL517	F1	CL1125	B1	FB1206	*B2	IC1213	*B2	R141	L4	R452	L3	R711	F4	R822	*J4
C224	H2	C500	*F3	C595	*F2	C709	*G4	C801	*J5	C1029	K2	C1201	*B2	C1413	*B3	C5008	*F1	CL405	M2	CL518	F1	CL1126	B1	FB1207	*B2	IC1214	C2	R142	L4	R453	*L3	R712	*F4	R900	J4
C225	H2	C501	*F3	C596	*F2	C710	*G4	C802	*J5	C1030	*L2	C1202	*A2	C1414	*C1	C5009	*F1	CL406	M2	CL519	F2	CL1127	B1	FB1210	C2	IC1215	*C2	R143	L4	R500	F3	R713	F4	R901	*J4
C226	H2	C502	*F3	C597	*F2	C711	*H4	C803	J5	C1031	*L2	C1203	*B2	C1415	B3	C5010	F1	CL407	M2	CL520	G2	CL1128	B2	FB1211	C2	IC1216	*A2	R144	*M4	R501	F3	R714	*F4	R902	J4
C227	H2	C503	*F3	C598	*F2	C712	*H4	C804	*J5	C1032	*L3	C1204	*B2	C1416	*C3	C5011	F1	CL408	M2	CL521	G2	CL1129	B2	FB1300	D4	IC1300	D4	R145	*M4	R502	F3	R715	F4	R903	*K4
C228	*J2	C504	*F3	C599	*F2	C713	*G4	C805	*J5	C1033	*L3	C1205	*A2	C1417	*C1	C5012	G1	CL409	M2	CL600	D1	CL1130	B2	FB1301	*D4	IC1301	C5	R146	M4	R503	F3	R716	*F4	R904	*J4
C229	*H2	C505	*F3	C600	E2	C714	*G4	C806	J5	C1034	*L3	C1206	*C2	C1418	C3	C7000	F4	CL410	*M2	CL601	D1	CL1131	B2	FB1400	E4	IC1302	C5	R147	*M4	R504	F3	R717	F4	R905	*K4
C300	J3	C506	*F3	C601	D2	C715	*H4	C807	*J5	C1035	*L3	C1207	*C2	C1419	C1	C7001	*F4	CL411	*M2	CL602	D1	CL1132	C2			IC1303	D5	R148	M4	R505	F3	R718	*F4	R952	*K4
C301	G2	C507	*F3	C602	D2	C716	*H4	C808	*J5	C1036	*M3	C1208	*B2	C1420	B3	C7002	F4	CL412	*M2	CL603	D1	CL1133	C2	IC100	J4	IC1304	*C5	R149	N4	R506	G3	R719	F4	R953	*J4
C302	H2	C508	*F3	C603	E2	C717	*G4	C809	J5	C1037	*M3	C1209	*B1	C1425	A3	C7003	*F4	CL413	*M2	CL604	D1	CL1134	C2	IC101	L4	IC1305	*C5	R200	*J4	R507	G3	R720	*F4	R954	*J4
C303	H2	C509	*F3	C604	E2	C718	*G4	C810	*J5	C1038	*L3	C1210	*B1	C1426	A3	C7004	F4	CL414	P2	CL605	D1	CL1135	C2	IC102	*K5	IC1307	C4	R201	*J4	R508	G3	R721	F4	R955	*J4
C304	G2	C510	*F3	C605	E1	C719	*G4	C811	J5	C1039	*L3	C1211	*B1	C1427	A3	C7005	*F4	CL415	P2	CL606	D1	CL1136	C2	IC103	M5	IC1308	*D5	R205	*H2	R509	G3	R722	*F4	R956	*J4

SRW-5800

R957	*J4	R1068	L2	R1203	*B2	R1331	D4	R1435	G3	RB512	G1	RB1325	*C5
R965	*J4	R1069	L3	R1204	*B2	R1332	D4	R1436	H3	RB513	F1	RB1326	*C5
R966	*K4	R1070	L2	R1205	*B2	R1333	D4	R1437	H3	RB514	*F1	RB1327	*C5
R973	*J4	R1071	L2	R1206	*B2	R1334	D4			RB515	F1	RB1328	*C5
R974	J4	R1072	L2	R1207	*B2	R1335	D4	RB100	*M5	RB516	F2	RB1329	*D5
R975	*J4	R1073	L1	R1208	*A2	R1336	D4	RB101	M5	RB517	F2	RB1330	*C5
R976	*K4	R1074	L2	R1209	*C2	R1337	D4	RB102	L4	RB518	G3	RB1331	*D5
R977	*K4	R1075	*C1	R1210	*C2	R1338	*D4	RB103	M4	RB519	G3	RB1332	*D5
R978	*K4	R1100	G5	R1211	*C2	R1339	*D4	RB104	*M4	RB520	G3	RB1333	*D5
R979	*J4	R1101	F5	R1212	*C2	R1340	*D4	RB105	*M4	RB521	*G2	RB1334	*D5
R980	*J4	R1102	F5	R1213	*B2	R1341	*D4	RB106	M4	RB522	*G2	RB1400	A3
R981	J4	R1103	A2	R1214	*B2	R1342	*D4	RB107	M4	RB523	*G1		
R982	*J5	R1104	A2	R1215	*A2	R1343	*D4	RB108	M4	RB600	*E1	S200	K3
R983	*J5	R1105	A2	R1216	*C2	R1344	*D4	RB109	M4	RB601	*E1	S800	J3
R984	*J4	R1106	B1	R1217	*B2	R1345	*D4	RB110	*M4	RB602	*E1	S1000	N1
R985	*J4	R1107	B1	R1218	*B2	R1346	E4	RB111	*M4	RB603	*E1	S1001	M1
R986	*K4	R1108	B1	R1219	*A2	R1347	E4	RB112	M4	RB604	*D1	S1300	C1
R987	*K4	R1109	B1	R1220	*A2	R1348	*D4	RB113	M4	RB605	*D1	S1301	D4
R988	*J4	R1110	A1	R1221	*C2	R1349	*D4	RB114	*M4	RB606	*D1		
R989	*J4	R1111	A2	R1222	*C2	R1350	*D4	RB115	*M4	RB607	*D1	TP100	M5
R990	*J4	R1112	B1	R1223	*C2	R1351	*D4	RB116	K4	RB608	*E2	TP101	M5
R991	*K4	R1113	B2	R1224	*C2	R1352	D4	RB117	K4	RB609	*E2	TP102	M5
R992	*K4	R1114	B1	R1225	*A1	R1353	D4	RB118	K4	RB610	*E2	TP400	K1
R993	J5	R1115	B1	R1226	*A1	R1354	D4	RB119	K4	RB611	*D1	TP401	K1
R994	J5	R1116	*B2	R1227	*B1	R1355	D4	RB120	K4	RB612	*D1	TP402	L1
R995	J4	R1117	A2	R1228	*B1	R1356	D4	RB200	*J3	RB613	*D1	TP403	L1
R996	J4	R1118	A1	R1229	*C2	R1357	D4	RB201	*J3	RB614	*D1	TP500	G3
R997	J4	R1119	A2	R1230	*C2	R1358	D4	RB202	*J3	RB615	E3	TP501	F3
R998	*J4	R1120	A2	R1231	*C2	R1359	D4	RB203	*J3	RB616	E3	TP502	G2
R999	*K4	R1121	A2	R1232	*C2	R1360	D4	RB204	*J3	RB617	D3	TP503	F1
R1000	*C1	R1122	A2	R1233	*C2	R1361	D4	RB205	*J3	RB618	D3	TP800	J1
R1001	*C1	R1123	A2	R1234	*C2	R1362	D3	RB206	J3	RB619	D3	TP801	K1
R1007	C1	R1124	A2	R1235	*C2	R1363	D4	RB207	J3	RB620	D3	TP802	K1
R1008	N1	R1125	*A2	R1236	*C2	R1364	*D4	RB208	H2	RB701	G4	TP803	K1
R1009	M1	R1126	*A2	R1237	*B2	R1365	*D4	RB209	H2	RB702	G4	TP1000	N4
R1010	P4	R1127	*A2	R1240	E5	R1366	*D4	RB210	H2	RB703	G4	TP1001	N4
R1011	P4	R1128	A2	R1241	E5	R1367	D4	RB211	*K3	RB704	G4	TP1100	G1
R1012	P4	R1129	A2	R1242	E5	R1368	*D4	RB212	J3	RB705	*G4	TP1101	F5
R1013	P4	R1130	A2	R1243	D5	R1369	*D4	RB213	J4	RB706	*G4	TP1102	A1
R1014	P4	R1131	A2	R1246	N5	R1370	*D4	RB214	J4	RB707	*G4	TP1103	C2
R1015	P4	R1132	*A2	R1247	N5	R1371	D4	RB215	J4	RB708	*G4	TP1104	C2
R1016	P4	R1133	A2	R1248	N5	R1372	*D4	RB216	J4	RB709	F4	TP1300	F3
R1017	P4	R1134	*A2	R1249	N5	R1373	*D4	RB217	J4	RB710	*F4	TP1301	E3
R1018	P4	R1135	A2	R1250	N5	R1380	*E4	RB300	H1	RB711	F4	TP1302	E3
R1019	P3	R1136	A2	R1251	*C2	R1381	*E4	RB309	*H1	RB712	*F4	TP1303	E3
R1020	P3	R1137	A2	R1252	*C2	R1382	E4	RB310	*H1	RB713	H4		
R1021	P3	R1138	*A2	R1253	*B2	R1385	*E4	RB311	*H1	RB714	H4	X1200	*B1
R1022	P3	R1139	A2	R1254	*C2	R1386	*C4	RB312	*H1	RB715	H4	X1201	*B1
R1023	P3	R1140	A2	R1255	M5	R1387	*C4	RB313	*J1	RB716	H4	X1202	*A1
R1024	P4	R1141	A2	R1256	M5	R1388	*D4	RB314	*J1	RB717	H4	X1203	*A1
R1025	P4	R1142	A2	R1257	M5	R1389	*D4	RB315	*K1	RB718	G5	X1204	*C1
R1026	P4	R1143	A2	R1258	M5	R1390	*D4	RB316	*K1	RB719	G5	X1205	*C2
R1027	P4	R1144	*B2	R1259	M5	R1391	*D4	RB317	*K1	RB720	G5		
R1028	P4	R1145	A2	R1260	M5	R1392	*D4	RB318	*K1	RB721	G5	*:B SIDE	
R1029	P4	R1146	*B2	R1261	M5	R1393	D5	RB319	*L1	RB722	*G4		
R1030	P4	R1147	B1	R1262	*M5	R1394	D5	RB320	*L1	RB723	G4		
R1031	N4	R1148	*B2	R1263	*M5	R1395	D4	RB321	J1	RB724	G4		
R1032	N4	R1149	B2	R1264	*M5	R1396	*D4	RB322	J1	RB725	G4		
R1033	*N4	R1150	B2	R1265	*M5	R1397	D4	RB323	J1	RB726	G4		
R1034	*N5	R1151	B2	R1266	*M5	R1398	*D4	RB324	J1	RB800	*J3		
R1035	*P5	R1152	B2	R1267	*M5	R1400	*A3	RB400	N2	RB1000	*B1		
R1036	*N4	R1153	*B2	R1300	*D5	R1401	*A3	RB401	N2	RB1001	*D5		
R1037	*N4	R1154	*B2	R1301	D5	R1402	*A3	RB402	N2	RB1002	B1		
R1038	*N4	R1155	C1	R1302	D5	R1403	*A3	RB403	N2	RB1003	D5		
R1039	*N4	R1156	C2	R1303	*C5	R1404	*A3	RB404	N2	RB1100	*F5		
R1041	*N4	R1157	*B2	R1304	*C5	R1405	A3	RB405	N2	RB1101	*F5		
R1042	*L3	R1158	G5	R1305	*C5	R1406	A3	RB406	M2	RB1102	*B2		
R1043	L3	R1159	*B2	R1306	*C5	R1407	A3	RB407	M2	RB1103	*B2		
R1044	L3	R1160	G5	R1307	*C5	R1408	A3	RB408	*N2	RB1104	*G5		
R1045	*L2	R1161	*B2	R1308	D5	R1409	A3	RB409	*N2	RB1105	G5		
R1046	*L2	R1162	G5	R1309	D5	R1410	*A3	RB410	*M2	RB1106	C3		
R1047	*L3	R1163	*B2	R1310	*C4	R1411	A3	RB411	*M2	RB1107	C2		
R1048	L3	R1164	G5	R1311	C1	R1412	*F1	RB412	M3	RB1200	*E5		
R1049	*M2	R1171	C3	R1312	C1	R1413	*E1	RB413	M3	RB1201	*N5		
R1050	*L2	R1172	C3	R1313	D5	R1414	*E1	RB414	M3	RB1202	*N5		
R1051	L2	R1173	H5	R1314	*C4	R1415	*F1	RB415	M3	RB1303	D5		
R1052	L2	R1174	H5	R1315	D5	R1416	M1	RB416	*L3	RB1304	C5		
R1053	*L2	R1175	B2	R1316	D4	R1417	L1	RB417	*L3	RB1305	C5		
R1054	*L2	R1176	B3	R1317	D4	R1418	L1	RB418	L3	RB1306	C5		
R1055	*L2	R1179	H5	R1318	D4	R1419	M1	RB419	L3	RB1307	D5		
R1056	*L2	R1180	H5	R1319	D4	R1420	L1	RB500	*G2	RB1308	D5		
R1057	*L2	R1181	H5	R1320	D5	R1424	*A3	RB501	*F2	RB1309	*C5		
R1058	*M2	R1182	*H5	R1321	D5	R1425	*A3	RB502	F2	RB1310	*C5		
R1059	L2	R1183	H5	R1322	D4	R1426	A3	RB503	G2	RB1313	D4		
R1060	L2	R1184	H5	R1323	D4	R1427	H3	RB504	F2	RB1314	D4		
R1061	L3	R1185	H5	R1324	D5	R1428	H3	RB505	*F2	RB1315	*D4		
R1062	*L2	R1186	G5	R1325	*D5	R1429	H3	RB506	F2	RB1319	*C5		
R1063	L3	R1187	*B2	R1326	*D5	R1430	H3	RB507	F3	RB1320	*C5		
R1064	L3	R1188	B2	R1327	*D4	R1431	H3	RB508	F3	RB1321	*D5		
R1065	M2	R1200	*B2	R1328	*D4	R1432	H3	RB509	*G1	RB1322	*C5		
R1066	L1	R1201	*B2	R1329	*D5	R1433	H3	RB510	*F1	RB1323	C5		
R1067	*M3	R1202	*B2	R1330	D4	R1434	G3	RB511	F1	RB1324	C5		

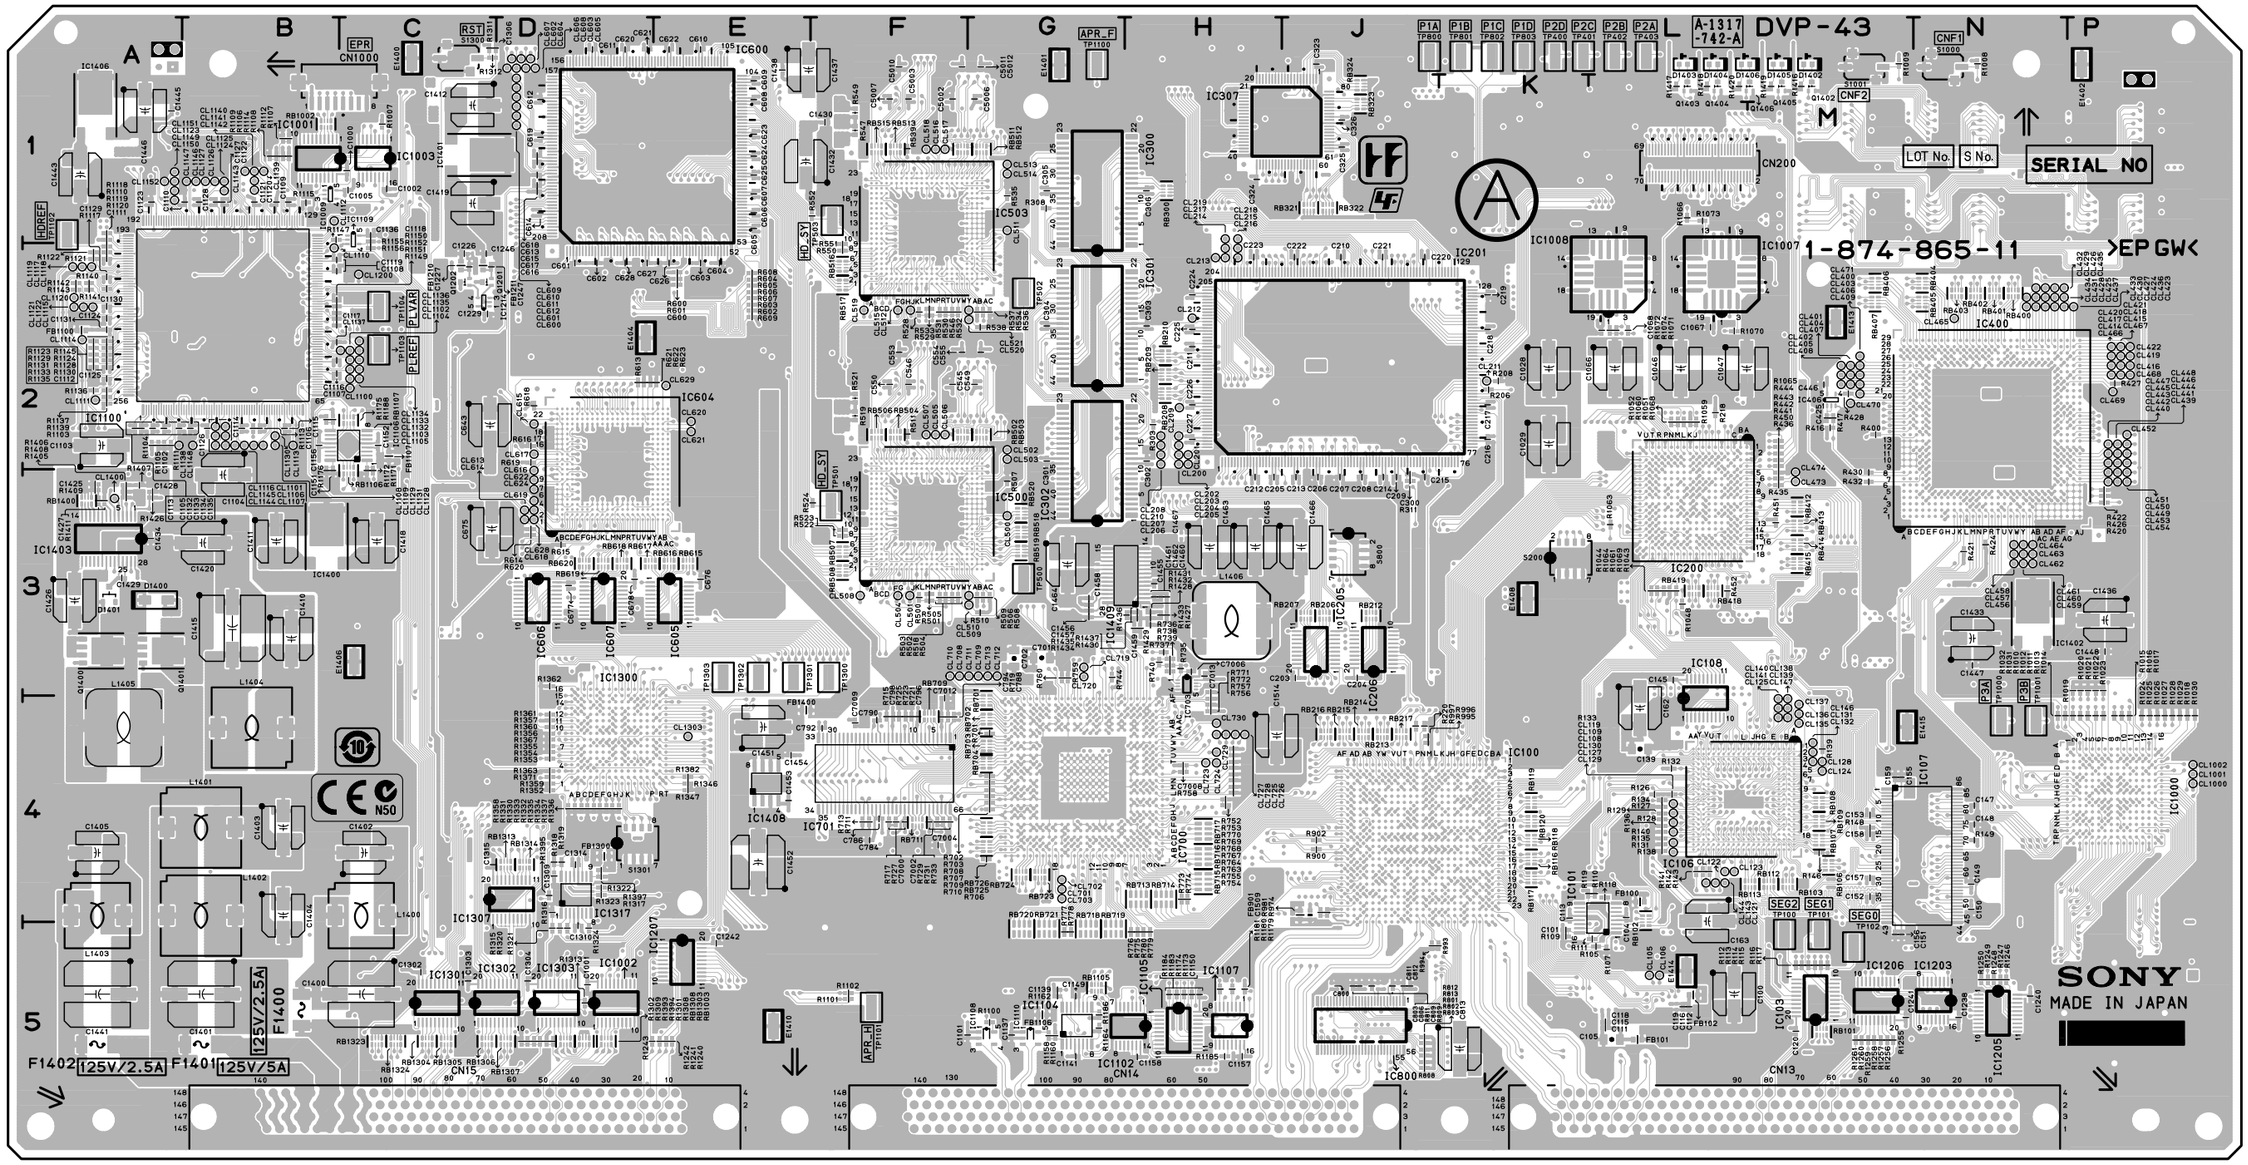
DVP-43
A-1317-742-A
1-874-865-11
SERIAL NO
LOT No.
S No.
SONY
MADE IN JAPAN
F1402 125V/2.5A
F1401 125V/5A
F1400 125V/2.5A
CN1000
CN200
CN13
CN14
CN15
IC1001
IC1003
IC600
IC604
IC1100
IC1403
IC1300
IC1408
IC1307
IC1317
IC1301
IC1302
IC1303
IC1002
IC1207
IC307
IC300
IC503
IC301
IC501
IC302
IC1008
IC1007
IC201
IC1400
IC200
IC108
IC100
IC1402
IC1101
IC1107
IC1105
IC1104
IC1102
IC701
IC700
IC1206
IC1203
IC1205
IC1013
IC107
IC106
IC1000
IC800
IC1009
IC1010
IC1011
IC1012
IC1014
IC1015
IC1016
IC1017
IC1018
IC1019
IC1020
IC1021
IC1022
IC1023
IC1024
IC1025
IC1026
IC1027
IC1028
IC1029
IC1030
IC1031
IC1032
IC1033
IC1034
IC1035
IC1036
IC1037
IC1038
IC1039
IC1040
IC1041
IC1042
IC1043
IC1044
IC1045
IC1046
IC1047
IC1048
IC1049
IC1050
IC1051
IC1052
IC1053

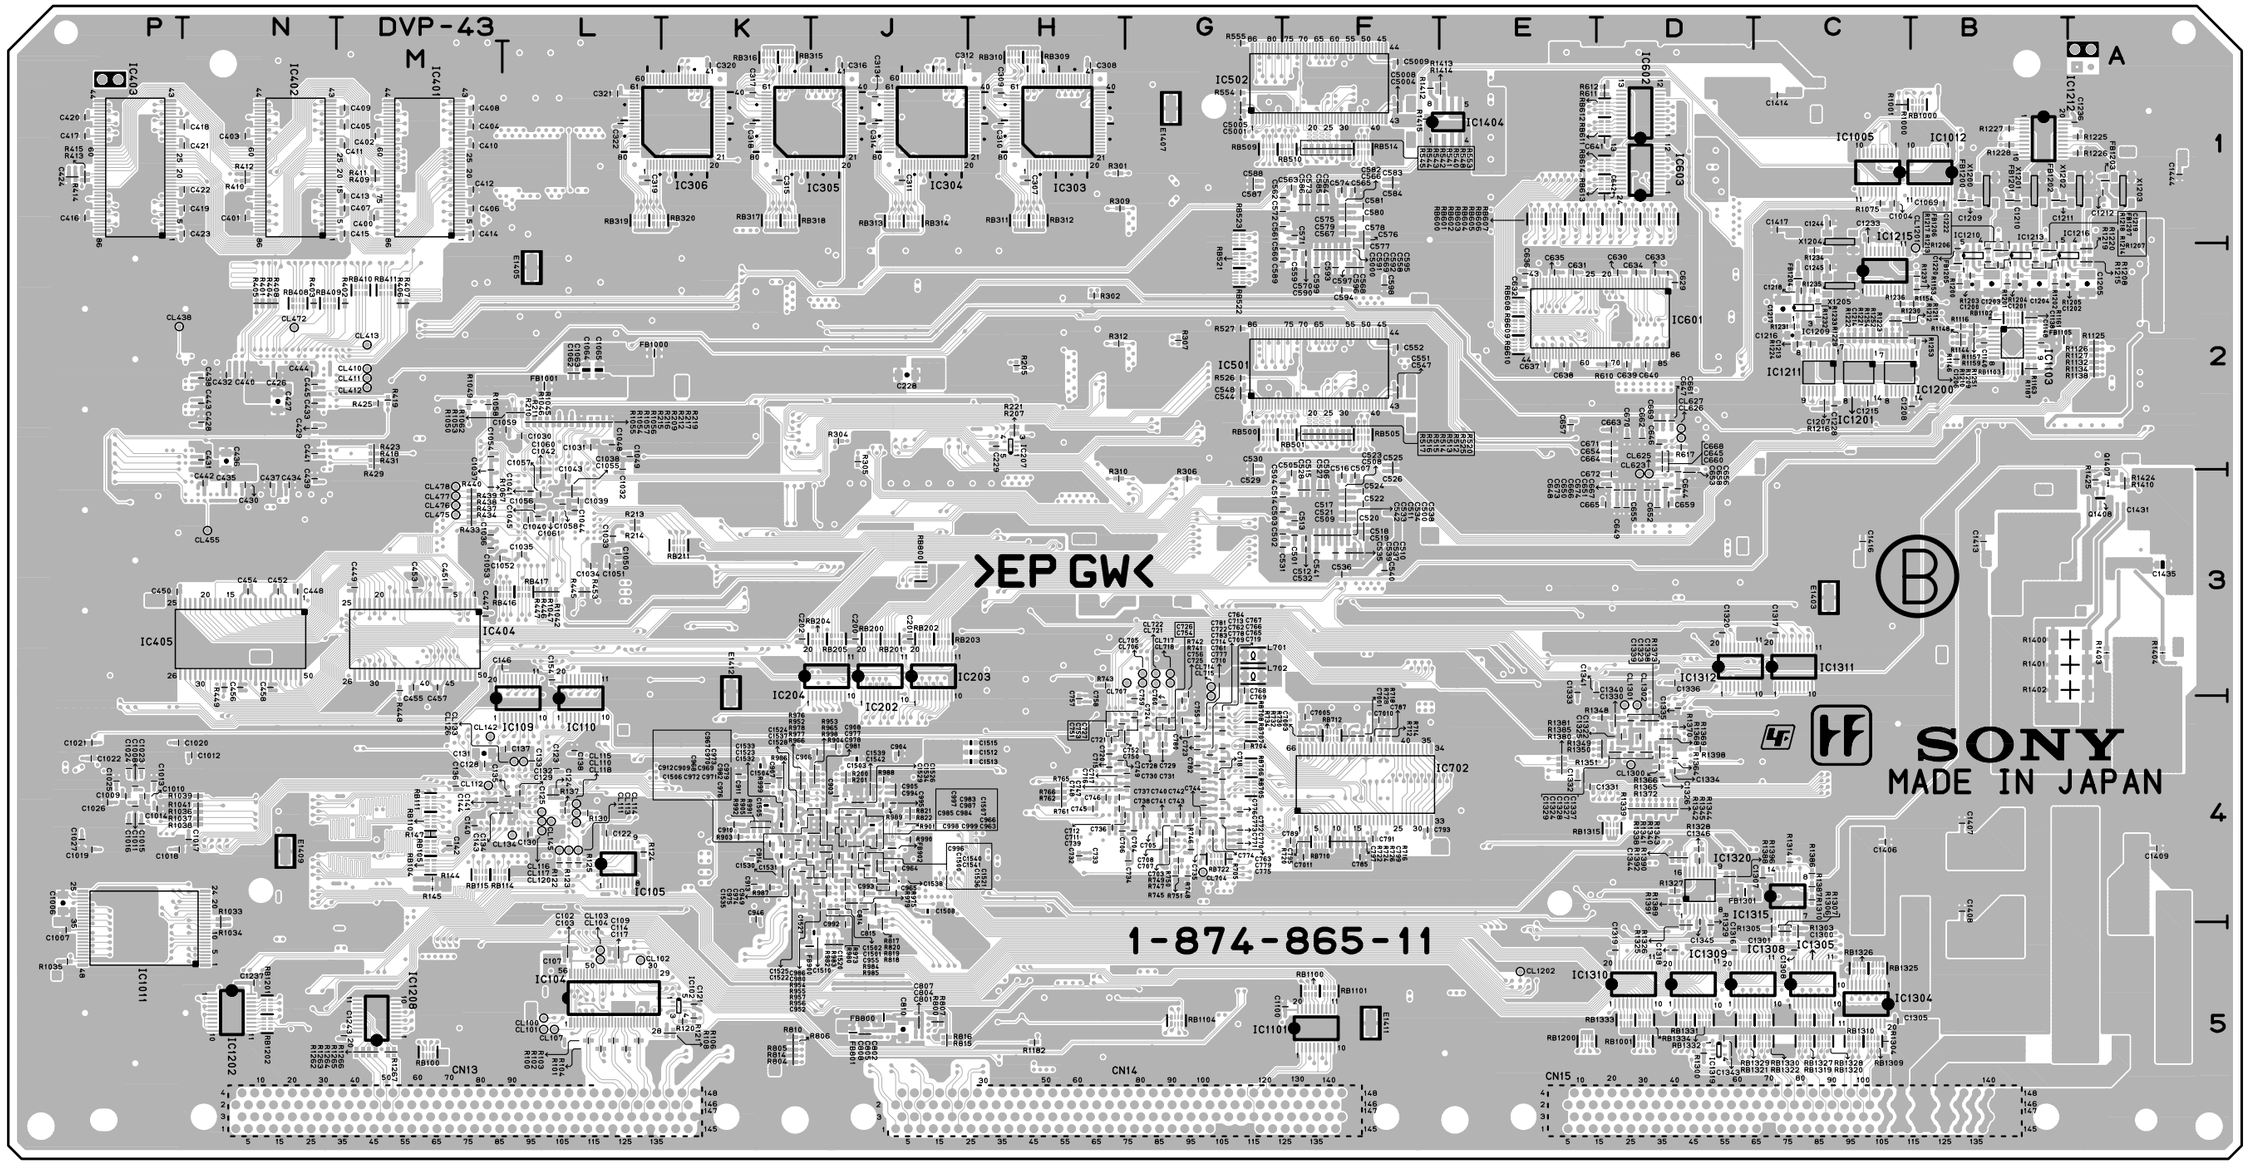

DVP-43 -B SIDE-
SUFFIX: -11

DVP-43 (1-874-865-12)

C100	L5	C305	G1	C511	*F3	C606	E1	C720	*H4	C812	J5	C1040	*L3	C1212	*A1	C1428	A3	C7006	H3	CL416	P2	CL607	D1	CL1137	C2	IC104	*L5	IC1309	*D5	R201	*J4	R508	G3	R720	*F4
C101	K5	C306	H1	C512	*F3	C607	E1	C721	*H4	C813	K5	C1041	*L3	C1213	*C2	C1429	A3	C7008	H4	CL417	P2	CL608	D1	CL1138	A2	IC105	*L4	IC1310	*D5	R205	*H2	R509	G3	R721	F4
C102	*L5	C307	*H1	C513	*F3	C608	E1	C722	*G4	C814	*J4	C1042	*L3	C1214	*C2	C1430	F1	C7009	F4	CL418	P2	CL609	D1	CL1139	B1	IC106	L4	IC1311	*C3	R206	K2	R510	G3	R722	*F4
C103	*L5	C308	*H1	C514	*F3	C609	E1	C723	*G4	C815	*J5	C1043	*L3	C1215	*C2	C1431	*A3	C7010	*F4	CL419	P2	CL610	D1	CL1140	B1	IC107	N4	IC1312	*D3	R207	*H2	R511	F2	R723	F4
C104	L4	C309	*H1	C515	*F3	C610	E1	C724	*G4	C903	*J4	C1044	*L3	C1216	*C2	C1432	E1	C7011	*F4	CL420	P2	CL611	D1	CL1141	B1	IC108	L4	IC1315	*C4	R208	K2	R512	*F2	R724	*F4
C105	L5	C310	*H1	C516	*F3	C611	D1	C725	*G4	C904	*J4	C1045	*L3	C1217	*C2	C1433	N3	C7012	F4	CL421	P2	CL612	D1	CL1142	B1	IC109	*M4	IC1317	D4	R209	*L2	R513	*F2	R725	F4
C107	*L5	C311	*J1	C517	*F3	C612	D1	C726	*G4	C905	*J4	C1046	L2	C1218	*C2	C1434	A3	C7013	H3	CL422	P2	CL613	D3	CL1143	B1	IC110	*L4	IC1319	*D5	R210	*L2	R514	*F2	R726	*F4
C109	*L5	C312	*J1	C518	*F3	C613	D1	C727	*G4	C906	*J4	C1047	L2	C1219	*B2	C1435	*A3			CL423	P2	CL614	D3	CL1144	B2	IC200	L3	IC1320	*D4	R211	*L2	R515	*F2	R727	F4
C111	L5	C313	*J1	C519	*F3	C614	D1	C728	*G4	C907	*K4	C1048	*L2	C1220	*B2	C1436	P3	CL100	*L5	CL424	N2	CL615	D2	CL1145	B2	IC201	J2	IC1400	B3	R212	*L2	R516	*F2	R728	*F4
C112	L5	C314	*J1	C520	*F3	C615	D1	C729	*G4	C908	*J4	C1049	*L2	C1222	*B2	C1437	E1	CL101	*L5	CL425	N2	CL616	D3	CL1146	B1	IC202	*J4	IC1401	C1	R213	*L3	R517	*F2	R729	F4
C113	K4	C315	*K1	C521	*F3	C616	D1	C730	*G4	C909	*K4	C1050	*L3	C1226	C2	C1438	E1	CL102	*L5	CL426	N2	CL617	D2	CL1147	B1	IC203	*J4	IC1402	N3	R214	*L3	R518	F3	R730	*F4
C114	*L5	C316	*J1	C522	*F3	C617	D1	C731	*G4	C910	*K4	C1051	*L3	C1227	C2	C1441	A5	CL103	*L5	CL427	N2	CL618	D3	CL1148	B2	IC204	*K4	IC1403	A3	R215	*L2	R519	F2	R731	F4
C115	L5	C317	*K1	C523	*F3	C618	D1	C732	*H4	C911	*K4	C1052	*M3	C1228	*C2	C1443	A1	CL104	*L5	CL428	N2	CL619	D3	CL1149	A1	IC205	J3	IC1404	*F1	R216	*L2	R520	*F2	R732	*F4
C116	L5	C318	*K1	C524	*F3	C619	D1	C733	*H4	C912	*K4	C1053	*M3	C1229	C2	C1444	*A1	CL105	L5	CL429	N2	CL620	E2	CL1150	A1	IC206	J3	IC1406	A1	R217	*L2	R521	F2	R733	F4
C117	*L5	C319	*L1	C525	*F2	C620	D1	C734	*G4	C913	*K4	C1054	*M2	C1233	*C1	C1445	A1	CL106	L5	CL430	N2	CL621	E2	CL1151	A1	IC207	*H2	IC1408	E4	R218	L2	R522	F3	R734	*F4
C118	L5	C320	*K1	C526	*F3	C621	D1	C735	*G4	C914	*K4	C1055	*L3	C1236	*A1	C1446	A1	CL107	*L5	CL431	N2	CL622	D3	CL1152	A1	IC300	G1	IC1409	H3	R219	*L2	R523	F3	R735	H3
C119	L5	C321	*L1	C527	*F3	C622	E1	C736	*H4	C946	*K4	C1056	*L3	C1237	*N5	C1447	N3	CL108	L4	CL432	N2	CL623	*D3	CL1200	C2	IC301	G2			R220	J4	R524	F3	R736	H3
C120	M5	C322	*L1	C528	*F3	C623	E1	C737	*G4	C949	*J4	C1057	*L3	C1238	N5	C1448	P3	CL109	L4	CL433	N2	CL624	D3	CL1201	*B2	IC302	G2	L701	*G3	R221	*H2	R525	*F2	R737	H3
C121	*K5	C323	J1	C529	*G3	C624	E1	C738	*G4	C952	*J4	C1058	*L3	C1240	N5	C1451	E4	CL110	*L4	CL434	N2	CL625	*D3	CL1202	*E5	IC303	*H1	L702	*G3	R301	*H1	R526	*G2	R738	H3
C122	*L4	C324	H1	C530	*G2	C625	E1	C739	*G4	C955	*J4	C1059	*L2	C1241	M5	C1452	E4	CL111	*L4	CL435	N2	CL626	*D2	CL1300	*D4	IC304	*J1	L1400	C4	R302	*H2	R527	*G2	R739	H3
C123	*L4	C325	J1	C531	*F3	C626	E2	C740	*G4	C963	*J4	C1060	*L3	C1242	E5	C1453	E4	CL112	*M4	CL436	N2	CL627	*D2	CL1301	*D4	IC305	*K1	L1401	B4	R303	H2	R528	F2	R740	H3
C124	*L4	C326	J1	C532	*F3	C627	D2	C741	*G4	C964	*J4	C1061	*L3	C1243	*M5	C1454	E4	CL113	*L4	CL437	N2	CL628	D3	CL1302	*D4	IC306	*K1	L1402	B4	R304	*J2	R529	F2	R741	*G4
C125	*L4	C400	*M1	C533	*F3	C628	D2	C742	*G4	C965	*J4	C1062	*L2	C1244	*C1	C1455	H3	CL114	*L4	CL438	*P2	CL629	E2	CL1303	E4	IC307	J1	L1403	A4	R305	*J2	R530	F2	R742	*G3
C128	*M4	C401	*N1	C534	*F3	C629	*D2	C743	*G4	C966	*J4	C1063	*L2	C1245	*C2	C1456	G3	CL115	*L4	CL439	P3	CL701	G4	CL1400	A3	IC400	N2	L1404	B4	R306	*G3	R531	F2	R743	*H3
C129	*L4	C402	*M1	C535	*F3	C630	*D2	C744	*G4	C967	*J4	C1064	*L2	C1246	C2	C1457	G3	CL116	*L4	CL440	P3	CL702	G4			IC401	*M1	L1405	A4	R307	*G2	R532	F2	R744	G3
C130	*L4	C403	*N1	C536	*F3	C631	*E2	C745	*H4	C968	*K4	C1065	*L2	C1247	C2	C1458	G3	CL117	*L4	CL441	P3	CL703	G4	CN13	M5	IC402	*N1	L1406	H3	R308	G1	R533	F2	R745	*G4
C131	*M4	C404	*M1	C537	*F3	C632	*E2	C746	*H4	C969	*K4	C1066	L2	C1300	*C5	C1459	H3	CL118	*L4	CL442	P3	CL704	*G4	CN14	G5	IC403	*P1			R309	*H1	R534	G2	R746	*G4
C132	*L4	C405	*M1	C538	*F3	C633	*D2	C747	*G4	C970	*J4	C1067	L2	C1301	*C5	C1460	H3	CL119	L4	CL443	P2	CL705	*G3	CN15	C5	IC404	*M3	Q1201	C2	R310	*H3	R535	G1	R747	*G4
C133	*L4	C406	*M1	C539	*F3	C634	*D2	C748	*H4	C971	*J4	C1068	L2	C1302	C5	C1461	H3	CL120	*L4	CL444	P2	CL706	*G3	CN200	L1	IC405	*N3	Q1202	C2	R311	J3	R536	G2	R748	*G4
C134	*L4	C407	*M1	C540	*F3	C635	*E2	C749	*H4	C972	*K4	C1069	*B1	C1303	C5	C1462	H3	CL121	L4	CL445	P2	CL707	*G3	CN1000	B1	IC406	M2	Q1400	A3	R312	*H2	R537	G2	R749	*G4
C135	*L4	C408	*M1	C541	*F3	C636	*E2	C750	*H4	C973	*J4	C1100	*F5	C1304	D5	C1463	H3	CL122	L4	CL446	P2	CL708	F3			IC500	F3	Q1401	A3	R400	M2	R538	G2	R750	*G4
C136	*M4	C409	*M1	C542	*F3	C637	*E2	C751	*H4	C974	*K4	C1101	F5	C1305	*C5	C1464	G3	CL123	L4	CL447	P2	CL709	G3	D1400	A3	IC501	*F2	Q1402	M1	R401	*N2	R539	F1	R751	*G4
C137	*L4	C410	*M1	C544	*G2	C638	*E2	C752	*H4	C975	*K4	C1102	A2	C1306	C1	C1465	H3	CL124	M4	CL448	P2	CL710	F3	D1401	A3	IC502	*F1	Q1403	L1	R402	*M2	R540	*F1	R752	H4
C138	*L4	C411	*M1	C545	F2	C639	*D2	C753	*H4	C976	*J4	C1103	A2	C1307	*C4	C1466	J3	CL125	M4	CL449	P2	CL711	G3	D1402	M1	IC503	F1	Q1404	L1	R403	*N2	R541	*F1	R753	H4
C139	L4	C412	*M1	C546	F2	C640	*D2	C754	*G4	C977	*J4	C1104	B3	C1308	*C5	C1467	H3	CL126	*L4	CL450	P2	CL712	G3	D1403	L1	IC600	D1	Q1405	M1	R404	*N2	R542	*F1	R754	H4
C140	*M4	C413	*M1	C547	*F2	C641	*D1	C755	*G4	C978	*J4	C1105	A2	C1309	D4	C1500	*J4	CL127	L4	CL451	P2	CL713	G3	D1404	L1	IC601	*D2	Q1406	M1	R405	*N2	R543	*F1	R755	H4
C141	*M4	C414	*M1	C548	*G2	C642	*D1	C756	*G4	C979	*J4	C1106	B2	C1310	D5	C1501	*J4	CL128	M4	CL452	P2	CL714	*G3	D1405	M1	IC602	*D1	Q1407	*A3	R406	*M2	R544	*F1	R756	H4
C142	*M4	C415	*M1	C549	G2	C643	C2	C757	*H4	C980	*J4	C1107	B2	C1314	D4	C1502	*J4	CL129	L4	CL453	P3	CL715	*G4	D1406	L1	IC603	*D1	Q1408	*A3	R407	*M2	R545	*F1	R757	H4
C143	*L4	C416	*P1	C550	F2	C644	*D3	C758	*H4	C981	*J4	C1108	B2	C1315	C4	C1503	*J4	CL130	L4	CL454	P3	CL717	*G3			IC604	D2			R408	*N2	R546	F2	R758	H4
C144	*M4	C417	*P1	C551	*F2	C645	*D2	C759	*G4	C982	*J4	C1109	B1	C1316	*D5	C1504	*K4	CL131	M4	CL455	*N3	CL718	*G3	E1400	C1	IC605	D3	R100	*L5	R409	*M1	R547	F1	R759	G3
C145	L3	C418	*N1	C552	*F2	C646	*D2	C760	*G4	C983	*J4	C1110	B1	C1317	*C3	C1505	*K4	CL132	M4	CL456	N3	CL719	G3	E1401	G1	IC606	D3	R101	*L5	R410	*N1	R548	*F1	R760	G3
C146	*L3	C419	*N1	C553	F2	C647	*D2	C761	*G4	C984	*J4	C1111	A2	C1318	*D5	C1506	*K4	CL133	*L4	CL457	N3	CL720	G3	E1402	P1	IC607	D3	R102	*L5	R411	*M1	R549	F1	R761	*H4
C147	N4	C420	*P1	C554	F2	C648	*D3	C762	*G4	C985	*J4	C1112	A2	C1319	*D5	C1507	*J4	CL134	*L4	CL458	N3	CL721	*G3	E1403	*C3	IC700	G4	R103	*L5	R412	*N1	R550	F2	R762	*H4
C148	N4	C421	*N1	C555	G2	C649	*D3	C763	*G4	C986	*J4	C1113	A2	C1320	*D3	C1508	*J4	CL135	M4	CL459	N3	CL722	*G3	E1404	D2	IC701	F4	R104	*L5	R413	*P1	R551	F2	R763	H4
C149	N4	C422	*N1	C558	*F2	C650	*D3	C764	*G4	C987	*J4	C1114	B2	C1322	*D4	C1509	J4	CL136	M4	CL460	N3	CL723	H4	E1405	*L2	IC702	*F4	R105	L5	R414	*P1	R552	F1	R764	H4
C150	N4	C423	*N1	C559	*F2	C651	*D3	C765	*G4	C992	*J5	C1115	B2	C1323	*D4	C1510	*J5	CL137	M4	CL461	N3	CL724	H4	E1406	C3	IC703	H3	R106	*K5	R415	*P1	R553	*F1	R765	*H4
C151	M5	C424	*P1	C560	*F2	C652	*D3	C766	*G4	C993	*J4	C1116	B2	C1324	*D4	C1512	*H4	CL138	M4	CL462	N3	CL725	H4	E1407	*G1	IC800	J5	R107	L5	R416	M2	R554	*G1	R766	*H4
C152	M4	C425	M2	C561	*F1	C653	*D3	C767	*G4	C994	*J4	C1117	B2	C1325	*D4	C1513	*H4	CL139	M4	CL463	N3	CL726	H4	E1408	K3	IC1000	P4	R108	*K5	R417	M2	R555	*G1	R767	H4
C153	M4	C426	*N2	C562	*F1	C654	*D2	C768	*G3	C995	*J4	C1118	B2	C1326	*D4	C1514	H4	CL140	M4	CL464	N3	CL727	H4	E1409	*N4	IC1001	B1	R109	K5	R418	*M2	R600	E2	R768	H4
C154	*L3	C427	*N2	C563	*F1	C655	*D3	C769	*G4	C996	*J4	C1119	B2	C1327	*D4	C1515	*H4	CL141	M4	CL465	N2	CL728	H4	E1410	E5	IC1002	D5	R110	L4	R419	*M2	R601	E2	R769	H4
C155	M4	C428	*N2	C564	*F1	C656	*D3	C770	*G4	C997	*J4	C1120	B1	C1328	*D4	C1520	*J5	CL142	*M4	CL466	P2	CL729	H4	E1411	*F5	IC1003	C1	R111	L5	R420	P3	R602	E2	R770	H4
C156	M5	C429	*N2	C565	*F1	C657	*E2	C771	*G4	C998	*J4	C1121	B1	C1329	*D4	C1521	*J4	CL143	L4	CL467	P2	CL730	H4	E1412	*K3	IC1005	*C1	R112	M5	R421	N3	R603	E2	R771	H3
C157	M4	C430	*N3	C566	*F1	C658	*D3	C772	*G4	C999	*J4	C1122	B1	C1330	*D4	C1522	*K4	CL144	L4	CL468	P2	CL1000	P4	E1413	M2	IC1007	L2	R113	M5	R422	P3	R604	E2	R772	H4
C158	M4	C431	*N2	C567	*F1	C659	*D3	C773	*G4	C1000	C1	C1123	A1	C1331	*E4	C1523	*K4	CL145	*L4	CL469	P2	CL1001	P4	E1414	L5	IC1008	L2	R114	M5	R423	*M2	R605	E2	R773	H4
C159	M4	C432	*N2	C568	*F2	C660	*D2	C774	*G4	C1001	D5	C1124	A2	C1332	*E4	C1524	*K4	CL146	M4	CL470	M2	CL1002	P4	E1415	M4	IC1009	B1	R115	M5	R424	N3	R606	E2	R774	H4
C162	L4	C433	*N2	C569	*F2	C661	*D2	C775	*G4	C1002	C1	C1125	A2	C1333	*E3	C1525	*K4	CL147	M4	CL471	M2	CL1100	C2			IC1011	*P5	R116	M5	R425	*M2	R607	E2	R775	H5
C163	L4	C434	*N3	C570	*F2	C662	*D2	C776	*G4	C1004	*C1	C1126	B2	C1334	*D4	C1526	*J4	CL200	H2	CL472	*N2	CL1101	B2	F1400	B5	IC1012	*B1	R117	M5	R426	P3	R608	E2	R776	H5
C200	*J3	C435	*N3	C571	*F1	C663	*D2	C777	*G4	C1005	C1	C1127	B1	C1335	*D4	C1527	*K4	CL201	H2	CL473	M3	CL1102	C2	F1401	B5	IC1100	B2	R118	L4	R427	P2	R609	E2	R777	G5
C201	*J3	C436	*N2	C572	*F1	C664	*D2	C778	*G4	C1006	*P4	C1128	B1	C1336	*D3	C1528	*K4	CL202	H2	CL474	M3	CL1103	C2	F1402	A5	IC1101	*F5	R119	K4	R428	M2	R610	*D2	R778	G5
C202	*K3	C437	*N3	C573	*F1	C665	*D3	C779	*G4	C1007	*P5	C1129	A2	C1337	*D4	C1529	*J4	CL203	H2	CL475	*M3	CL1104	C2			IC1102	H5	R120	*K5	R429	*M2	R611	*D1	R779	H5
C203	J3	C438	*N2	C574	*F1	C666	*D3	C780	*G4	C1008	*P4	C1130	A2	C1338	*D4	C1530	*K4	CL204	H2	CL476	*M3	CL1105	C2	FB100	L4	IC1103	*B2	R121	*K5	R430	M3	R612	*D1	R780	H5
C204	J3	C439	*N3	C575	*F1	C667	*D3	C781	*G4	C1009	*P4	C1131	A2	C1339	*D4	C1531	*K4	CL205	H2	CL477	*M3	CL1106	B2	FB101	L5	IC1104	G5	R122	*L4	R431	*M2	R613	D2	R800	*J5
C205	H3	C440	*N2	C576	*F1	C668	*D2	C782	*G4	C1010	*P4	C1132	A2	C1340	*D4	C1532	*K4	CL206	H2	CL478	*M3	CL1107	B2	FB102	L5	IC1105	H5	R123	*L4	R432	M3	R614	D3	R801	J5
C206	J3	C441	*N2	C577	*F2	C669	*D2	C783	*G4	C1011	*P4	C1133	A2	C1341	*D3	C1533	*K4	CL207	H2	CL500	G3	CL1108	B2	FB800	*J5	IC1106	C2	R124	*L4	R433	*M3	R615	D3	R802	J5
C207	J3	C442	*N3	C578	*F1	C670	*D2	C784	F4	C1012	*N4	C1134	A2	C1343	*D5	C1534	*J4	CL208	H2	CL501	F3	CL1109	B2	FB801	*J5	IC1107	H5	R125	*L4	R434	*M3	R616	D2	R803	J5
C208	J3	C443	*N2	C579	*F1	C671	*D2	C785	*F4	C1013	*P4	C1135	B2	C1344	*D4	C1535	*K4	CL209	H2	CL502	G2	CL1110	B2	FB900	*K5	IC1108	G5	R126	L4	R435	M3	R617	*D2	R804	*K5
C209	J3	C444	*N2	C580	*F1	C672	*D3	C786	F4	C1014	*P4	C1136	C1	C1345	*D5	C1536	*J4	CL210	H2	CL503	G2	CL1111	A2	FB901	J4	IC1109	C1	R127	L4	R436	M3	R618	D2	R805	*K5
C210	J2	C445	*N2	C581	*F1	C673	*D3	C787	*F4	C1015	*P4	C1137	G5	C1346	*D4	C1537	*K4	CL211	K2	CL504	F3	CL1112	B1	FB902	*J4	IC1110	G5	R128	L4	R437	*M3	R619	D2	R806	*K5
C211	H2	C446	M2	C582	*F1	C674	*D3	C788	F4	C1016	*P4	C1138	*B2	C1400	C5	C1538	*J4	CL212	H2	CL505	F2	CL1113	B2	FB1000	*L2	IC1200	*C2	R129	L4	R438	*M3	R620	D3	R807	*J5
C212	H3	C447	*M3	C583	*F1	C675	C3	C789	*F4	C1017	*N4	C1139	G5	C1401	B5	C1539	*J4	CL213	H2	CL506	F2	CL1114	A2	FB1001	*L2	IC1201	*C2	R130	*L4	R439	*M3	R621	D2	R808	J5
C213	J3	C448	*N3	C584	*F1	C676	E3	C790	F4	C1018	*P4	C1140	*B2	C1402	C4	C1540	*J4	CL214	H2	CL507	F2	CL1115	A2	FB1100	A2	IC1202	*N5	R131	L4	R440	*M3	R622	D2	R809	J5
C214	J3	C449	*M3	C585	*F1	C677	D3	C791	*F4	C1019	*P4	C1141	G5	C1403	B4	C1541	*J4	CL215	H2	CL508	F3	CL1116	B2	FB1105	*B2	IC1203	N5	R132	L4	R441	M2	R623	E2	R810	*K5
C215	J3	C450	*P3	C586	*F1	C678	D3	C792	F4	C1020	*P4	C1148	*B2	C1404	B4	C1542	*J4	CL216	H2	CL509	G3	CL1117	A2	FB1106	G5	IC1205	N5	R133	L4	R442	M2	R624	D3	R811	J5
C216	K2	C451	*M3	C587	*G1	C701	G3	C793	*F4	C1021	*P4	C1149	G5	C1405	A4	C5000	*F2	CL217	H2	CL510	G3	CL1118	A2	FB1107	C2	IC1206	M5	R134	L4	R443	M2	R701	G4	R812	J5
C217	K2	C452	*N3	C588	*G1	C702	G3	C794	F4	C1022	*P4	C1150	H5	C1406	*C4	C5001	*G1	CL218	H1	CL511	G1	CL1119	A2	FB1200	*B1	IC1207	E5	R135	L4	R444	M2	R702	G4	R813	J5
C218	K2	C453	*M3	C589	*F2	C703	*G4	C795	*F4	C1023	*P4	C1151	B3	C1407	*B4	C5002	F1	CL219	H1	CL512	F2	CL1120	A2	FB1201	*B1	IC1208	*M5	R136	L4	R445	*L3	R703	G4	R814	*K5
C219	K2	C454	*N3	C590	*F2	C704	*G4	C796	F4	C1024	*P4	C1152	C2	C1408	*B4	C5003	F1	CL400	M2	CL513	G1	CL1121	A2	FB1202	*B1	IC1209	*C2	R137	*L4	R446	*L3	R704	*G4	R815	*J5
C220	J2	C455	*M3	C591	*F2	C705	*G4	C797	*F4	C1025	*P4	C1156	B2	C1409	*A4	C5004	*F1	CL401	M2	CL514	G1	CL1122	A2	FB1203	*A1	IC1210	*B2	R138	L4	R447	*L3	R705	*G4	R816	*J5
C221	J2	C456	*N3	C592	*F2	C706	*H4	C798	F4	C1026	*P4	C1157	H5	C1410	B3	C5005	*G1	CL402	M2	CL515	F2	CL1123	A1	FB1204	*C2	IC1211	*C2	R139	M4	R448	*M3	R706	G4	R817	*J4
C222	J2	C457	*M3	C593	*F2	C707	*G4	C799	*F4	C1027	*P4	C1158	H5	C1411	B3	C5006	G1	CL403	M2	CL516	F1	CL1124	B1	FB1205	*B2	IC1212	*B1	R140	L4	R449	*N3	R707	G4	R818	*J5
C223	H2	C458	*N3	C594	*F2	C708	*G4	C800	J5	C1028	K2	C1200	*B2	C1412	C1	C5007	F1	CL404	M2	CL517	F1	CL1125	B1	FB1206	*B2	IC1213	*B2	R141	L4	R450	M3	R708	G4	R819	*J4
C224	H2	C500	*F3	C595	*F2	C709	*G4	C801	*J5	C1029	K2	C1201	*B2	C1413	*B3	C5008	*F1	CL405	M2	CL518	F1	CL1126	B1	FB1207	*B2	IC1214	C2	R142	L4	R451	M3	R709	G4	R820	*J4
C225	H2	C501	*F3	C596	*F2	C710	*G4	C802	*J5	C1030	*L2	C1202	*A2	C1414	*C1	C5009	*F1	CL406	M2	CL519	F2	CL1127	B1	FB1210	C2	IC1215	*C2	R143	L4	R452	L3	R710	G4	R821	*J4
C226	H2	C502	*F3	C597	*F2	C711	*H4	C803	J5	C1031	*L2	C1203	*B2	C1415	B3	C5010	F1	CL407	M2	CL520	G2	CL1128	B2	FB1211	C2	IC1216	*A2	R144	*M4	R453	*L3	R711	F4	R822	*J4
C227	H2	C503	*F3	C598	*F2	C712	*H4	C804	*J5	C1032	*L3	C1204	*B2	C1416	*C3	C5011	F1	CL408	M2	CL521	G2	CL1129	B2	FB1300	D4	IC1300	D4	R145	*M4	R500	F3	R712	*F4	R900	J4
C228	*J2	C504	*F3	C599	*F2	C713	*G4	C805	*J5	C1033	*L3	C1205	*A2	C1417	*C1	C5012	G1	CL409	M2	CL600	D1	CL1130	B2	FB1301	*D4	IC1301	C5	R146	M4	R501	F3	R713	F4	R901	*J4
C229	*H2	C505	*F3	C600	E2	C714	*G4	C806	J5	C1034	*L3	C1206	*C2	C1418	C3	C7000	F4	CL410	*M2	CL601	D1	CL1131	B2	FB1400	E4	IC1302	C5	R147	*M4	R502	F3	R714	*F4	R902	J4
C300	J3	C506	*F3	C601	D2	C715	*H4	C807	*J5	C1035	*L3	C1207	*C2	C1419	C1	C7001	*F4	CL411	*M2	CL602	D1	CL1132	C2			IC1303	D5	R148	M4	R503	F3	R715	F4	R903	*K4
C301	G2	C507	*F3	C602	D2	C716	*H4	C808	*J5	C1036	*M3	C1208	*B2	C1420	B3	C7002	F4	CL412	*M2	CL603	D1	CL1133	C2	IC100	J4	IC1304	*C5	R149	N4	R504	F3	R716	*F4	R904	*J4
C302	H2	C508	*F3	C603	E2	C717	*G4	C809	J5	C1037	*M3	C1209	*B1	C1425	A3	C7003	*F4	CL413	*M2	CL604	D1	CL1134	C2	IC101	L4	IC1305	*C5	R150	*K4	R505	F3	R717	F4	R905	*K4
C303	H2	C509	*F3	C604	E2	C718	*G4	C810	*J5	C1038	*L3	C1210	*B1	C1426	A3	C7004	F4	CL414	P2	CL605	D1	CL1135	C2	IC102	*K5	IC1307	C4	R151	*K4	R506	G3	R718	*F4	R952	*K4
C304	G2	C510	*F3	C605	E1	C719	*G4	C811	J5	C1039	*L3	C1211	*B1	C1427	A3	C7005	*F4	CL415	P2	CL606	D1	CL1136	C2	IC103	M5	IC1308	*D5	R200	*J4	R507	G3	R719	F4	R953	*J4

R954	*J4	R1065	M2	R1200	*B2	R1328	*D4	R1432	H3	RB509	*G1	RB1322	*C5
R955	*J4	R1066	L1	R1201	*B2	R1329	*D5	R1433	H3	RB510	*F1	RB1323	C5
R956	*J4	R1067	*M3	R1202	*B2	R1330	D4	R1434	G3	RB511	F1	RB1324	C5
R957	*J4	R1068	L2	R1203	*B2	R1331	D4	R1435	G3	RB512	G1	RB1325	*C5
R965	*J4	R1069	L3	R1204	*B2	R1332	D4	R1436	H3	RB513	F1	RB1326	*C5
R966	*K4	R1070	L2	R1205	*B2	R1333	D4	R1437	H3	RB514	*F1	RB1327	*C5
R973	*J4	R1071	L2	R1206	*B2	R1334	D4			RB515	F1	RB1328	*C5
R974	J4	R1072	L2	R1207	*B2	R1335	D4	RB100	*M5	RB516	F2	RB1329	*D5
R975	*J4	R1073	L1	R1208	*A2	R1336	D4	RB101	M5	RB517	F2	RB1330	*C5
R976	*K4	R1074	L2	R1209	*C2	R1337	D4	RB102	L4	RB518	G3	RB1331	*D5
R977	*K4	R1075	*C1	R1210	*C2	R1338	*D4	RB103	M4	RB519	G3	RB1332	*D5
R978	*K4	R1100	G5	R1211	*C2	R1339	*D4	RB104	*M4	RB520	G3	RB1333	*D5
R979	*J4	R1101	F5	R1212	*C2	R1340	*D4	RB105	*M4	RB521	*G2	RB1334	*D5
R980	*J4	R1102	F5	R1213	*B2	R1341	*D4	RB106	M4	RB522	*G2	RB1400	A3
R981	J4	R1103	A2	R1214	*B2	R1342	*D4	RB107	M4	RB523	*G1		
R982	*J5	R1104	A2	R1215	*A2	R1343	*D4	RB108	M4	RB600	*E1	S200	K3
R983	*J5	R1105	A2	R1216	*C2	R1344	*D4	RB109	M4	RB601	*E1	S800	J3
R984	*J4	R1106	B1	R1217	*B2	R1345	*D4	RB110	*M4	RB602	*E1	S1000	N1
R985	*J4	R1107	B1	R1218	*B2	R1346	E4	RB111	*M4	RB603	*E1	S1001	M1
R986	*K4	R1108	B1	R1219	*A2	R1347	E4	RB112	M4	RB604	*D1	S1300	C1
R987	*K4	R1109	B1	R1220	*A2	R1348	*D4	RB113	M4	RB605	*D1	S1301	D4
R988	*J4	R1110	A1	R1221	*C2	R1349	*D4	RB114	*M4	RB606	*D1		
R989	*J4	R1111	A2	R1222	*C2	R1350	*D4	RB115	*M4	RB607	*D1	TP100	M5
R990	*J4	R1112	B1	R1223	*C2	R1351	*D4	RB116	K4	RB608	*E2	TP101	M5
R991	*K4	R1113	B2	R1224	*C2	R1352	D4	RB117	K4	RB609	*E2	TP102	M5
R992	*K4	R1114	B1	R1225	*A1	R1353	D4	RB118	K4	RB610	*E2	TP400	K1
R993	J5	R1115	B1	R1226	*A1	R1354	D4	RB119	K4	RB611	*D1	TP401	K1
R994	J5	R1116	*B2	R1227	*B1	R1355	D4	RB120	K4	RB612	*D1	TP402	L1
R995	J4	R1117	A2	R1228	*B1	R1356	D4	RB200	*J3	RB613	*D1	TP403	L1
R996	J4	R1118	A1	R1229	*C2	R1357	D4	RB201	*J3	RB614	*D1	TP500	G3
R997	J4	R1119	A2	R1230	*C2	R1358	D4	RB202	*J3	RB615	E3	TP501	F3
R998	*J4	R1120	A2	R1231	*C2	R1359	D4	RB203	*J3	RB616	E3	TP502	G2
R999	*K4	R1121	A2	R1232	*C2	R1360	D4	RB204	*J3	RB617	D3	TP503	F1
R1000	*C1	R1122	A2	R1233	*C2	R1361	D4	RB205	*J3	RB618	D3	TP800	J1
R1001	*C1	R1123	A2	R1234	*C2	R1362	D3	RB206	J3	RB619	D3	TP801	K1
R1007	C1	R1124	A2	R1235	*C2	R1363	D4	RB207	J3	RB620	D3	TP802	K1
R1008	N1	R1125	*A2	R1236	*C2	R1364	*D4	RB208	H2	RB701	G4	TP803	K1
R1009	M1	R1126	*A2	R1237	*B2	R1365	*D4	RB209	H2	RB702	G4	TP1000	N4
R1010	P4	R1127	*A2	R1240	E5	R1366	*D4	RB210	H2	RB703	G4	TP1001	N4
R1011	P4	R1128	A2	R1241	E5	R1367	D4	RB211	*K3	RB704	G4	TP1100	G1
R1012	P4	R1129	A2	R1242	E5	R1368	*D4	RB212	J3	RB705	*G4	TP1101	F5
R1013	P4	R1130	A2	R1243	D5	R1369	*D4	RB213	J4	RB706	*G4	TP1102	A1
R1014	P4	R1131	A2	R1246	N5	R1370	*D4	RB214	J4	RB707	*G4	TP1103	C2
R1015	P4	R1132	*A2	R1247	N5	R1371	D4	RB215	J4	RB708	*G4	TP1104	C2
R1016	P4	R1133	A2	R1248	N5	R1372	*D4	RB216	J4	RB709	F4	TP1300	F3
R1017	P4	R1134	*A2	R1249	N5	R1373	*D4	RB217	J4	RB710	*F4	TP1301	E3
R1018	P4	R1135	A2	R1250	N5	R1380	*E4	RB300	H1	RB711	F4	TP1302	E3
R1019	P3	R1136	A2	R1251	*C2	R1381	*E4	RB309	*H1	RB712	*F4	TP1303	E3
R1020	P3	R1137	A2	R1252	*C2	R1382	E4	RB310	*H1	RB713	H4		
R1021	P3	R1138	*A2	R1253	*B2	R1385	*E4	RB311	*H1	RB714	H4	X1200	*B1
R1022	P3	R1139	A2	R1254	*C2	R1386	*C4	RB312	*H1	RB715	H4	X1201	*B1
R1023	P3	R1140	A2	R1255	M5	R1387	*C4	RB313	*J1	RB716	H4	X1202	*A1
R1024	P4	R1141	A2	R1256	M5	R1388	*D4	RB314	*J1	RB717	H4	X1203	*A1
R1025	P4	R1142	A2	R1257	M5	R1389	*D4	RB315	*K1	RB718	G5	X1204	*C1
R1026	P4	R1143	A2	R1258	M5	R1390	*D4	RB316	*K1	RB719	G5	X1205	*C2
R1027	P4	R1144	*B2	R1259	M5	R1391	*D4	RB317	*K1	RB720	G5		
R1028	P4	R1145	A2	R1260	M5	R1392	*D4	RB318	*K1	RB721	G5	*:B SIDE	
R1029	P4	R1146	*B2	R1261	M5	R1393	D5	RB319	*L1	RB722	*G4		
R1030	P4	R1147	B1	R1262	*M5	R1394	D5	RB320	*L1	RB723	G4		
R1031	N4	R1148	*B2	R1263	*M5	R1395	D4	RB321	J1	RB724	G4		
R1032	N4	R1149	B2	R1264	*M5	R1396	*D4	RB322	J1	RB725	G4		
R1033	*N4	R1150	B2	R1265	*M5	R1397	D4	RB323	J1	RB726	G4		
R1034	*N5	R1151	B2	R1266	*M5	R1398	*D4	RB324	J1	RB800	*J3		
R1035	*P5	R1152	B2	R1267	*M5	R1400	*A3	RB400	N2	RB1000	*B1		
R1036	*N4	R1153	*B2	R1300	*D5	R1401	*A3	RB401	N2	RB1001	*D5		
R1037	*N4	R1154	*B2	R1301	D5	R1402	*A3	RB402	N2	RB1002	B1		
R1038	*N4	R1155	C1	R1302	D5	R1403	*A3	RB403	N2	RB1003	D5		
R1039	*N4	R1156	C2	R1303	*C5	R1404	*A3	RB404	N2	RB1100	*F5		
R1041	*N4	R1157	*B2	R1304	*C5	R1405	A3	RB405	N2	RB1101	*F5		
R1042	*L3	R1158	G5	R1305	*C5	R1406	A3	RB406	M2	RB1102	*B2		
R1043	L3	R1159	*B2	R1306	*C5	R1407	A3	RB407	M2	RB1103	*B2		
R1044	L3	R1160	G5	R1307	*C5	R1408	A3	RB408	*N2	RB1104	*G5		
R1045	*L2	R1161	*B2	R1308	D5	R1409	A3	RB409	*N2	RB1105	G5		
R1046	*L2	R1162	G5	R1309	D5	R1410	*A3	RB410	*M2	RB1106	C3		
R1047	*L3	R1163	*B2	R1310	*C4	R1411	A3	RB411	*M2	RB1107	C2		
R1048	L3	R1164	G5	R1311	C1	R1412	*F1	RB412	M3	RB1200	*E5		
R1049	*M2	R1171	C3	R1312	C1	R1413	*E1	RB413	M3	RB1201	*N5		
R1050	*L2	R1172	C3	R1313	D5	R1414	*E1	RB414	M3	RB1202	*N5		
R1051	L2	R1173	H5	R1314	*C4	R1415	*F1	RB415	M3	RB1303	D5		
R1052	L2	R1174	H5	R1315	D5	R1416	M1	RB416	*L3	RB1304	C5		
R1053	*L2	R1175	B2	R1316	D4	R1417	L1	RB417	*L3	RB1305	C5		
R1054	*L2	R1176	B3	R1317	D4	R1418	L1	RB418	L3	RB1306	C5		
R1055	*L2	R1179	H5	R1318	D4	R1419	M1	RB419	L3	RB1307	D5		
R1056	*L2	R1180	H5	R1319	D4	R1420	L1	RB500	*G2	RB1308	D5		
R1057	*L2	R1181	H5	R1320	D5	R1424	*A3	RB501	*F2	RB1309	*C5		
R1058	*M2	R1182	*H5	R1321	D5	R1425	*A3	RB502	F2	RB1310	*C5		
R1059	L2	R1183	H5	R1322	D4	R1426	A3	RB503	G2	RB1313	D4		
R1060	L2	R1184	H5	R1323	D4	R1427	H3	RB504	F2	RB1314	D4		
R1061	L3	R1185	H5	R1324	D5	R1428	H3	RB505	*F2	RB1315	*D4		
R1062	*L2	R1186	G5	R1325	*D5	R1429	H3	RB506	F2	RB1319	*C5		
R1063	L3	R1187	*B2	R1326	*D5	R1430	H3	RB507	F3	RB1320	*C5		
R1064	L3	R1188	B2	R1327	*D4	R1431	H3	RB508	F3	RB1321	*D5		

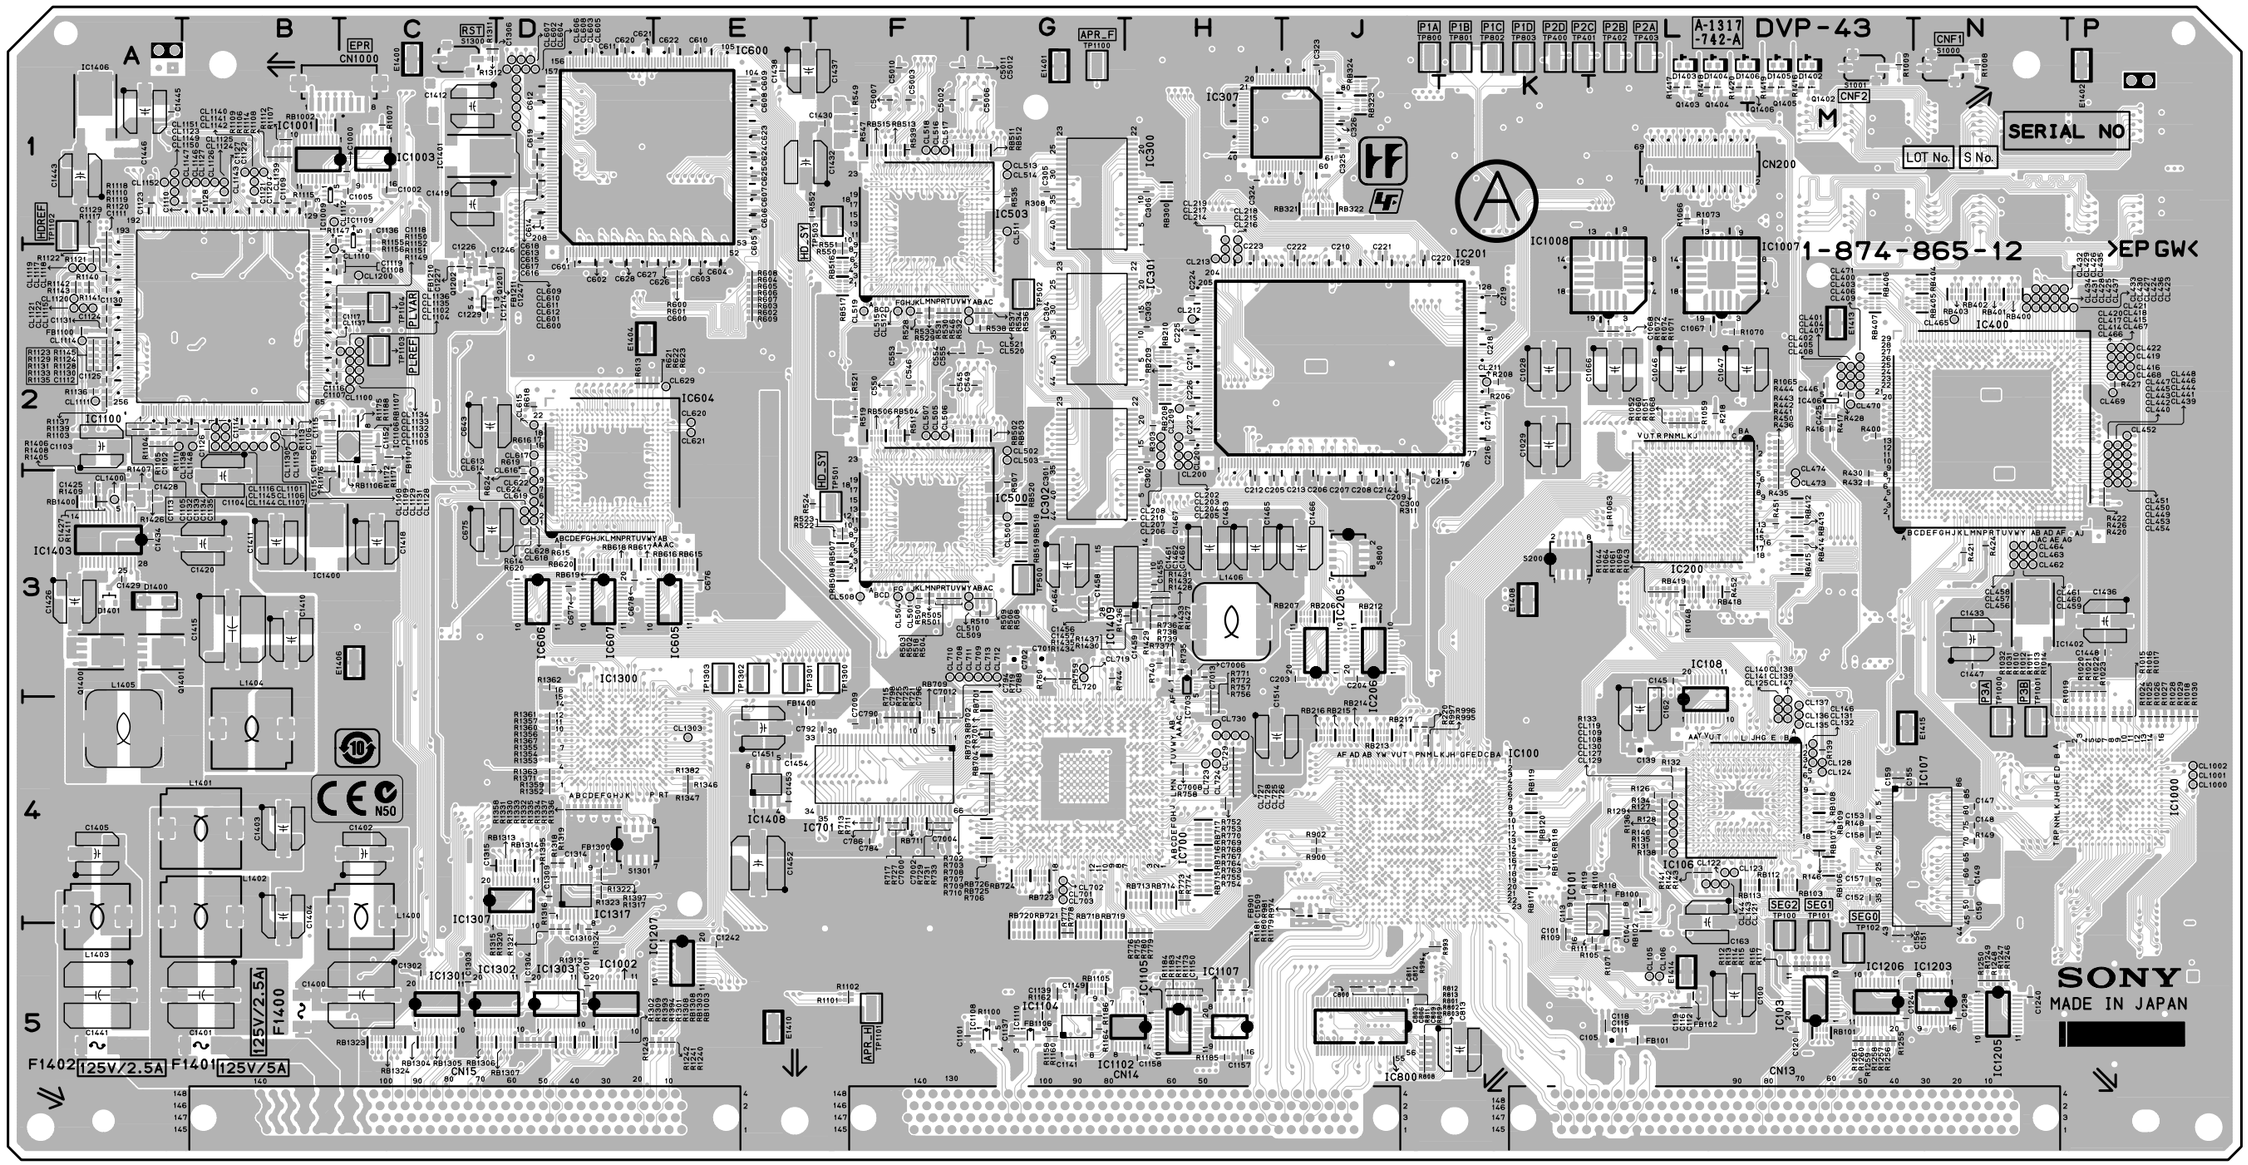

DVP-43 -A SIDE-
SUFFIX: -12

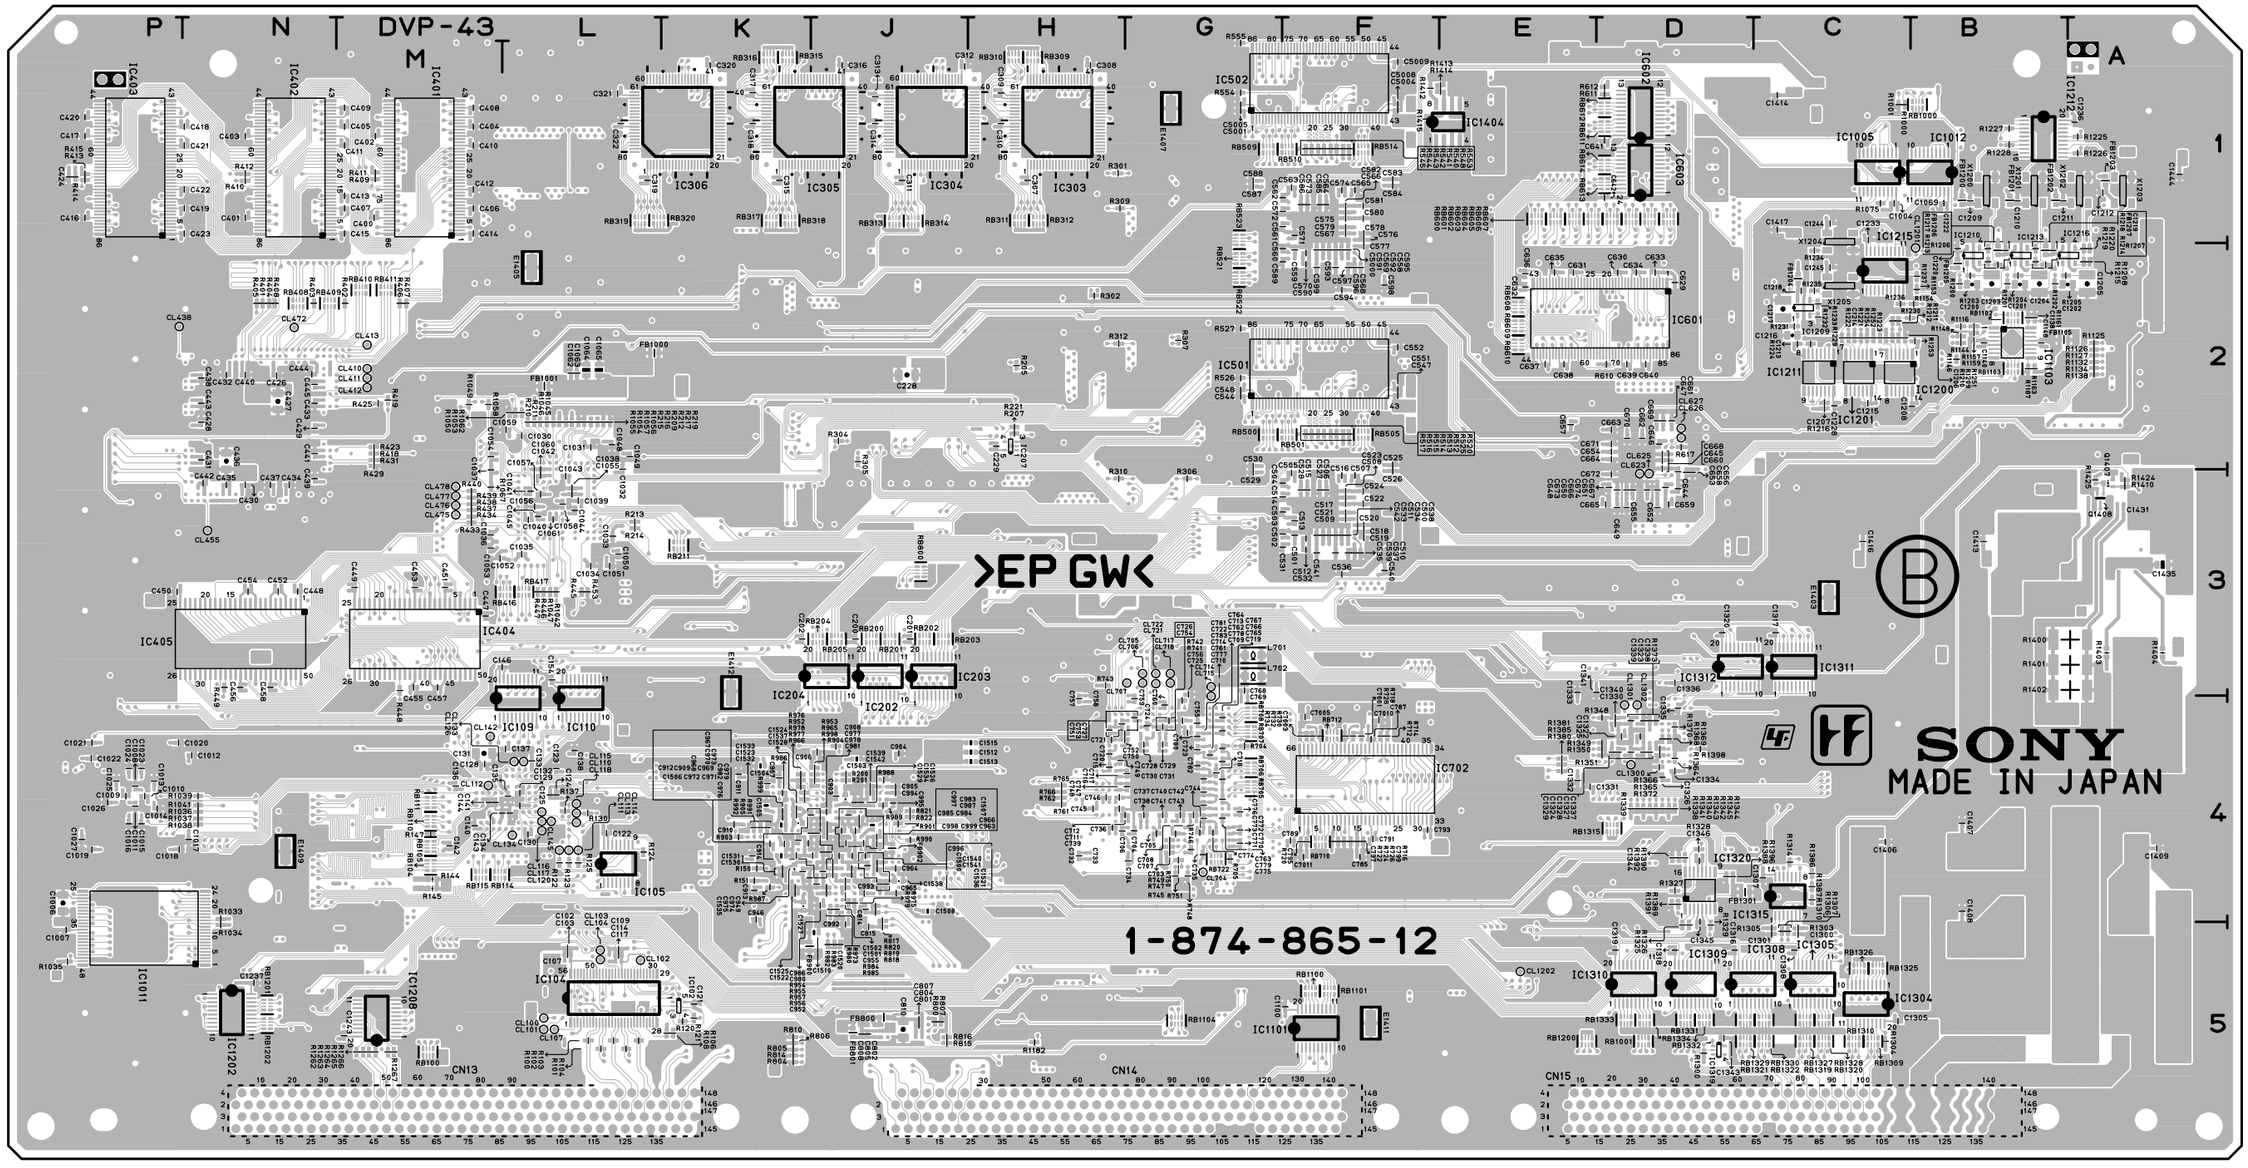

DVP-43 -B SIDE-
SUFFIX: -12

IF-1071 (1-877-566-11)

CN1 A1
CN2 *A1

*:B SIDE



IF-1071 -A SIDE-
SUFFIX: -11



IF-1071 -B SIDE-
SUFFIX: -11

MY-115 (1-877-565-11)

C100	D4	C198	E7	C724	E2	C1253	*C3	C2013	*G7	C2532	*F2	C3761	*J2	C3853	*L2	C4258	*P5	C4806	*L6	C5016	*H6	CL427	C4	CL7007	L7	FB707	*E3	IC2000	H7	Q5051	*H7	R254	D7	R421	D4
C101	*D5	C199	E7	C725	F2	C1254	*C3	C2014	M7	C2533	*F2	C3762	*J2	C3854	*J3	C4259	*P5	C4807	*L5	C5017	*H6	CL428	C4	CL7008	L7	FB708	*E3	IC2002	G7			R255	D7	R422	D4
C102	D5	C200	E7	C726	F2	C1255	*C3	C2015	*G7	C2534	*G1	C3763	*J2	C3855	J2	C4260	*P5	C4808	*K5	C5018	*H6	CL429	C4	CL7009	L7	FB709	*E3	IC2003	*H7	R100	*D6	R256	*E7	R423	D4
C103	D5	C201	E7	C727	E2	C1256	*E4	C2016	M7	C2535	*G1	C3764	*J2	C3856	J2	C4261	*P5	C4809	*K6	C5019	*H6	CL430	C4	CL7010	L7	FB2500	F2	IC2004	G7	R101	E6	R257	*E7	R424	D4
C104	D5	C202	E7	C728	E2	C1257	*E5	C2017	*G7	C2536	*G1	C3765	*J2	C3857	J2	C4262	*P4	C4810	*K6	C5020	*H6	CL431	C4	CL7011	K7	FB2501	*F2	IC2006	*G7	R102	*E6	R258	*E7	R425	D4
C105	D5	C203	E7	C729	F2	C1258	*E4	C2018	*F6	C2537	*G1	C3766	*J4	C3858	*K4	C4263	*P4	C4811	*K6	C5021	G5	CL432	C4	CL7012	L7	FB2502	*G1	IC2008	*G7	R103	E6	R259	*E7	R426	C3
C106	*D4	C204	D7	C730	F2	C1259	*E4	C2019	*F6	C2538	*G1	C3767	*J3	C3859	*K3	C4264	*P4	C4812	*K5	C5022	H5	CL433	C4	CL7013	L7	FB2503	*G1	IC2009	*F7	R104	D4	R260	*E7	R427	C3
C107	C5	C205	*E7	C731	E2	C1260	*E5	C2020	*F7	C2539	*G1	C3768	*J3	C3860	*K3	C4265	*P4	C4813	*L6	C5050	G5	CL434	C4	CL7014	L7	FB2505	F2	IC2010	*F7	R105	E5	R261	*E7	R428	C3
C108	*E5	C206	*E7	C732	E2	C1261	*E4	C2021	B5	C2540	G2	C3769	*L2	C3861	*K4	C4266	*P4	C4814	*K5	C5051	G5	CL435	C4	CL7015	L7	FB2506	F2	IC2011	*F7	R106	E5	R262	*E7	R429	C3
C109	*E5	C207	*E7	C733	*E3	C1262	*E4	C2022	A5	C2541	G2	C3770	*L2	C3862	*J3	C4267	*P3	C4815	*K5	C5052	*G5	CL436	C4	CL7016	L7	FB3500	*H2	IC2012	B5	R107	*E5	R263	*E7	R430	C3
C110	*E5	C208	*E7	C734	*F3	C1263	*E4	C2023	*C5	C2542	G2	C3771	*L2	C3863	*J3	C4268	*P3	C4816	*K5	C5053	*G5	CL437	C5	CL7017	L7	FB3750	*K4	IC2013	A5	R108	*E5	R264	*E7	R431	C3
C111	*E5	C209	*E7	C735	*E3	C1264	*E4	C2024	*A5	C2543	G2	C3772	*J2	C3864	*J3	C4269	*P3	C4817	*K6	C5054	H7	CL438	C5	CL7018	L7	FB3752	*J2	IC2014	*C5	R109	*E5	R265	*E7	R432	C3
C112	*E5	C210	*E7	C736	*E3	C1265	*E5	C2025	*D4	C2544	G2	C3773	*J2	C3865	*K3	C4270	*P3	C4818	*K6	C5055	H7	CL439	C5	CL7019	L7	FB3753	*J2	IC2015	*A5	R110	*E5	R266	*E7	R433	C3
C113	E5	C211	*D7	C737	*E3	C1266	*E4	C2026	*C4	C2546	F2	C3774	*L2	C3866	*J3	C4271	*P3	C4819	*K5	C5056	*H7	CL440	D4	CL7020	L7	FB3754	*L2	IC2016	*C4	R111	*D5	R267	*E7	R434	C3
C114	*E5	C212	*D7	C738	*E3	C1267	*E4	C2027	*C4	C2547	F2	C3775	*L2	C3867	*J3	C4272	*P2	C4820	*K5	C5057	*H7	CL604	C6	CL7021	L7	FB3755	*L2	IC2017	*G7	R112	*D5	R268	*E7	R435	C4
C115	*E5	C213	E7	C739	*E3	C1268	*E4	C2028	*C4	C2550	F2	C3776	*L2	C3868	*J3	C4273	*P2	C4821	*K5	C6002	L3	CL605	C7	CL7022	L7	FB3757	*J2	IC2018	M7	R113	*D5	R269	*E7	R436	C3
C116	*E5	C214	D7	C740	*E3	C1269	*E4	C2250	*K2	C2551	F2	C3777	*J2	C3869	*J3	C4274	*P2	C4822	*K5	C6003	L3	CL606	C7	CL7023	L7	FB3758	*J4	IC2019	L7	R114	*D5	R270	*E7	R437	C3
C117	*E5	C215	E7	C741	*E3	C1270	*E4	C2255	*K1	C2552	F2	C3778	*J2	C3870	*J3	C4275	*P2	C4823	*K5	C6004	*M3	CL607	C7	CL7024	G7	FB3759	*J4	IC2252	*K1	R115	D5	R271	*E7	R438	C4
C118	*E5	C216	*E7	C742	*E3	C1271	*E4	C2256	*K1	C2553	F2	C3779	*J3	C3871	*J3	C4276	P4	C4824	*K5	C6007	N3	CL608	G7	CL7025	G7	FB3765	*K3	IC2254	*J1	R116	D5	R272	E7	R439	C4
C119	*E5	C217	*E7	C743	*E3	C1272	*E4	C2264	*K1	C2555	F3	C3780	*J3	C3872	*J3	C4277	P3	C4825	*K6	C6008	L2	CL700	E5			FB3766	*J4	IC2350	*K1	R117	*E5	R273	E7	R440	C4
C120	*E5	C218	*D7	C744	*E3	C1273	*E4	C2267	*K1	C2557	F3	C3781	*J3	C3873	*J3	C4278	P2	C4826	*K6	C6009	L2	CL701	E5	CN7	M7	FB4750	*L4	IC2351	*J1	R118	*E5	R274	E7	R441	C4
C121	*D4	C219	D7	C745	*E3	C1274	*E4	C2268	*K2	C2558	*G1	C3782	J2	C3874	*J3	C4279	P2	C4827	*K5	C6010	*M1	CL703	E3	CN8	H7	FB4751	*L6	IC2500	F2	R119	E5	R275	E7	R442	C4
C122	*E5	C220	E7	C746	*E3	C1275	*E4	C2269	*K2	C2559	F1	C3783	J2	C3875	*J3	C4280	P5	C4828	*J5	C6013	N2	CL704	E3	CN9	C7	FB4752	*K6	IC2501	G2	R120	E5	R276	E7	R443	C4
C123	*E5	C229	*D6	C747	*E3	C1276	*E4	C2270	*K2	C2560	*G1	C3784	J2	C3876	*J3	C4281	P4	C4829	*K5	C6016	N2	CL705	E3	CN700	E2	FB4753	*K6	IC2502	G2	R121	*E6	R277	E7	R444	C4
C124	*D4	C230	E6	C748	*E3	C1277	*E4	C2271	*K2	C2561	*F1	C3785	*H2	C3877	*J3	C4282	P6	C4830	*K6	C6018	*N2	CL706	E3	CN1000	C1	FB4754	*L6	IC2503	G2	R122	*D6	R278	E7	R445	C3
C125	*D4	C231	*E6	C749	*E3	C1278	*E4	C2274	*K2	C3250	L3	C3786	*H2	C3878	*J3	C4283	P5	C4831	*K5	C6020	*P7	CL707	E3	CN1001	C1	FB4755	*L5	IC2505	F3	R123	D6	R279	E7	R446	C3
C126	D5	C232	D6	C750	*E3	C1279	*E4	C2275	*K2	C3251	K4	C3787	*H2	C3879	*J3	C4284	P5	C4832	*K5	C6021	P6	CL708	E3	CN1002	C1	FB4756	*K5	IC2506	*F1	R124	E6	R280	E7	R447	C3
C127	*D4	C233	*E6	C751	*E3	C1280	*E4	C2276	*K2	C3252	K4	C3788	*J3	C3880	*J3	C4285	P5	C4833	*K5	C6024	*L7	CL709	E3	CN1200	C3	FB4757	*K5	IC3000	J3	R125	*E6	R281	E7	R448	C3
C128	*D5	C234	D6	C752	*E3	C1281	*E4	C2277	*K2	C3253	L4	C3789	*J3	C3881	*J3	C4286	P4	C4834	*K6	C6026	M1	CL710	E3	CN2250	K1	FB4758	*J5	IC3252	L4	R126	*E6	R282	E7	R449	C3
C129	*D5	C235	*E6	C753	*E3	C1282	*E4	C2280	*J2	C3254	L4	C3790	*J3	C3882	*J3	C4287	P4	C4835	*J5	C6029	M1	CL711	E3	CN2251	K1	FB4759	*K6	IC3253	*L4	R127	E6	R283	E7	R450	C3
C130	*D5	C236	D6	C754	*E3	C1283	*E4	C2281	*J2	C3255	L4	C3791	*H2	C3883	*J3	C4288	P3	C4836	*K5	C6031	*L1	CL916	E4	CN2253	J1	FB4761	*K5	IC3254	L3	R128	E6	R284	E7	R451	C3
C131	D5	C237	*E6	C755	*E3	C1284	*E4	C2282	*J2	C3256	L4	C3792	*H2	C3884	*J3	C4289	P3	C4837	*K6	C6032	*L1	CL917	H3	CN2254	J1	FB4762	*J5	IC3255	*L2	R129	*E6	R285	E7	R452	C3
C132	*D4	C238	E6	C756	*D2	C1285	*E4	C2283	*J2	C3257	L3	C3793	*H2	C3885	*J3	C4290	P2	C4838	*K5	C6033	*M1	CL918	H3	CN4250	P2	FB4763	*K6	IC4000	K5	R130	*D6	R286	E7	R453	C3
C133	*D5	C239	*E6	C757	F2	C1286	*E4	C2286	*J2	C3258	K3	C3794	*H2	C3886	*J3	C4291	P2	C4839	*K6	C6034	*M1	CL919	H2	CN5000	G1	FB4764	*J6	IC5000	*H6	R131	D6	R287	E7	R454	C4
C134	*D5	C240	E6	C758	E2	C1287	*E4	C2287	*J2	C3259	*L4	C3795	*H2	C3887	*J3	C4292	P2	C4840	*K5	C6035	M1	CL920	H2	CN5010	G4	FB6002	*M1	IC5002	H6	R132	E6	R294	*D7	R455	C4
C135	*D5	C241	*E6	C759	E2	C1288	*D4	C2288	*J2	C3260	*K3	C3796	*H2	C3888	*J3	C4293	*P6	C4841	*K5	C6050	P7	CL921	H2	CN5011	H7	FB6003	J2	IC5004	*J6	R133	*E6	R295	*D7	R456	C4
C136	*D7	C242	E6	C901	H2	C1289	*D4	C2289	*J2	C3261	*K3	C3797	J2	C3889	*J3	C4750	K4	C4842	*J5	C6051	*L7	CL922	H2			FB6004	*K3	IC5005	*J5	R134	*E6	R296	D7	R457	C4
C137	*D7	C243	*E6	C1000	B2	C1290	*C3	C2292	*J2	C3262	*L3	C3798	J2	C3890	*J3	C4751	K7	C4843	*K6	C6052	*L1	CL923	H2	D400	C3	FB6005	J4	IC5012	J6	R135	E6	R297	D7	R458	C4
C138	*D7	C244	E6	C1001	B2	C1291	*D4	C2293	*J2	C3263	*L3	C3799	*H2	C3891	*J3	C4752	K7	C4844	*K5	C6053	*L1	CL924	H4	D701	D1	FB6006	*J5	IC5013	J6	R136	E6	R298	*E7	R459	C4
C139	*D7	C400	D4	C1002	*B2	C1292	*D4	C2297	*J1	C3264	*L3	C3800	*H2	C3892	*J3	C4753	*L5	C4845	*K5	C6054	*L1	CL925	H4	D702	D1	FB6007	*J7	IC5014	*K2	R137	D5	R299	*E7	R460	C4
C140	*D7	C401	C3	C1003	B2	C1293	*D4	C2300	*J1	C3265	*L3	C3801	*H2	C3893	*J3	C4754	J5	C4846	*K5	C6055	*L1	CL926	H4	D703	D1	FB6008	*K7	IC5015	*L5	R138	*D5	R300	E7	R461	C4
C141	*D7	C402	C3	C1004	C2	C1294	*D4	C2305	*J1	C3266	*L4	C3802	*J2	C3894	*J3	C4755	*J6	C4847	*K5	C6056	L3	CL1000	B2	D704	D1	FB6009	*L5	IC5016	H5	R139	D5	R301	E7	R462	C4
C142	*D7	C403	*C3	C1005	C2	C1295	*D4	C2306	*J1	C3267	*L4	C3803	*J2	C3895	*J3	C4756	*J5	C4848	*K5	C6057	L3	CL1001	B2	D705	E1	FB6010	M1	IC5020	H6	R140	*D5	R302	*D7	R463	C4
C143	*D7	C404	*C3	C1006	C2	C1296	*D4	C2307	*K1	C3268	L2	C3804	*J2	C3896	*J3	C4757	J5	C4849	*K5	C6058	L2	CL1002	C2	D706	E1			IC6000	M3	R141	*D5	R303	*D7	R464	*C5
C144	D7	C405	*C4	C1007	C2	C1297	*D4	C2308	*K1	C3269	K3	C3805	*J2	C3897	*J3	C4758	J6	C4850	*J6	C6059	L2	CL1004	D4	D1201	*G6	IC100	E4	IC6001	M2	R142	*D5	R304	D7	R465	C6
C145	D7	C406	*C4	C1008	C2	C1298	C3	C2309	*K1	C3270	K3	C3806	*J2	C3898	*J3	C4759	*L5	C4851	*K5	C6060	N3	CL1005	E4	D1203	*F6	IC102	*D6	IC6002	M2	R143	*D5	R305	D7	R466	C6
C146	D7	C407	*C4	C1009	C2	C1300	D1	C2310	*J1	C3271	L3	C3807	*J2	C3899	*J3	C4760	*L6	C4852	*K6	C6061	N3	CL1006	F5	D1204	*F5	IC103	D6	IC6004	*N2	R144	D5	R306	*E7	R467	B5
C147	D7	C408	*C4	C1010	C2	C1301	D1	C2350	*K1	C3272	L3	C3808	*J3	C3900	*J3	C4761	*L5	C4853	*J6	C6062	N3	CL1007	D4	D1205	*G5	IC104	*E6	IC6005	P6	R145	D5	R307	*E7	R468	*B6
C148	D7	C409	*C4	C1011	D2	C1302	D1	C2351	*L2	C3273	L3	C3809	*J3	C3901	*J3	C4762	*L5	C4854	*K5	C6063	N1	CL1008	D3	D1400	B1	IC105	E6	IC6009	L7	R146	*D5	R308	E7	R469	*B6
C149	D7	C410	*C4	C1013	C1	C1303	D1	C2352	*K1	C3274	L3	C3810	*J3	C3902	*J3	C4763	*L6	C4855	*K6	C6064	*N1	CL1009	F4	D1401	B1	IC401	C3	IC6010	M1	R147	*D5	R309	E7	R470	*C5
C150	D7	C411	*B5	C1024	D1	C1304	C3	C2353	*K1	C3275	L2	C3811	*J3	C3903	*J3	C4764	*K6	C4856	*K6	C6065	*N2	CL1010	F5	D1402	B1	IC402	C3	IC6012	L1	R148	*D5	R310	*E7	R471	B5
C151	D7	C412	B5	C1203	F6	C1305	C3	C2354	*K1	C3276	K2	C3812	*J3	C3912	*J3	C4765	*K6	C4857	*K6	C7000	B7	CL1011	F4	D1403	B1	IC403	C4	IC6013	L1	R149	D5	R311	E7	R472	*C5
C152	*E7	C413	B5	C1205	G6	C1306	C6	C2355	*L1	C3277	*L3	C3813	*J3	C3913	*J3	C4766	*K6	C4858	*K5	C7001	A7	CL1012	F4	D1404	A1	IC404	*B5	IC6014	L1	R150	*D5	R312	*E7	R473	B5
C153	*E7	C414	C5	C1208	*F6	C1307	D6	C2356	*L1	C3278	*K2	C3814	L2	C3916	*J3	C4767	*J6	C4859	*K5	C7002	B7	CL1013	E4	D3000	H1	IC405	B5	IC6015	L1	R151	D4	R313	E7	R474	*C5
C154	*E7	C415	C5	C1209	F6	C1308	C7	C2357	*K1	C3279	*K2	C3815	*J4	C3917	*J3	C4768	*L6	C4860	*K5	C7003	*B7	CL1014	E4	D3001	H1	IC406	B5			R152	D4	R314	*E7	R475	C5
C155	*E7	C416	*B5	C1211	*F6	C1309	D2	C2358	*J1	C3280	*L2	C3816	*J3	C3920	*J3	C4769	*K5	C4861	*K5	C7004	*A7	CL1015	E4	D3002	H1	IC407	C5	L1202	G6	R153	D4	R315	E7	R476	*B5
C156	*E7	C417	A5	C1214	*F6	C1312	D2	C2359	*J1	C3281	*L2	C3817	*J3	C3921	*J3	C4770	*K6	C4862	*K6			CL1016	E5	D4500	H1	IC408	B5	L1203	G5	R154	D4	R316	*E7	R477	C4
C157	*E7	C418	*A5	C1215	*F6	C1313	D2	C2360	*J1	C3282	*L2	C3818	*J2	C3924	*J3	C4771	*K6	C4863	*K6	CL100	D5	CL1018	D4	D4501	H1	IC409	*B5	L1204	B3	R155	D5	R317	E7	R478	C4
C158	*E7	C419	*C5	C1217	*F6	C1314	*D2	C2362	*J1	C3283	*L2	C3819	*J3	C3925	*J3	C4772	*K6	C4864	*K6	CL101	D5	CL1019	D3	D4502	H1	IC410	A5	L1205	*D3	R156	D5	R318	*E7	R479	C4
C159	*E7	C420	C5	C1220	*F6	C1315	D2	C2363	*J1	C3284	*L3	C3820	*K3	C3946	L2	C4773	*K6	C4865	*K6	CL102	D4	CL1020	E5	D5000	H7	IC411	*A5	L1206	*D3	R157	D5	R319	E7	R480	C4
C160	E7	C421	C5	C1221	*F5	C1316	D2	C2500	*G2	C3285	*K3	C3821	*J3	C3947	*J2	C4774	*K6	C4866	*K6	CL103	D4	CL1021	E3	D5001	J7	IC412	B5	L1207	*D3	R158	D5	R320	E7	R481	C4
C161	E7	C422	*B5	C1222	F6	C1317	D2	C2501	F2	C3500	J2	C3822	*J4	C3948	*J2	C4775	*K6	C4867	*K5	CL104	D4	CL1022	D3	D5002	G6	IC413	*B5	L1208	*C3	R159	E5	R321	*E7	R482	C4
C162	E7	C423	*B5	C1223	F6	C1318	D2	C2502	F2	C3501	J2	C3823	*J4	C3949	*J2	C4776	*K6	C4868	*K6	CL105	E5	CL1023	D3			IC414	*C5	L1300	D2	R224	*D7	R322	E7	R483	C4
C163	E7	C608	A6	C1224	*F5	C1319	*D2	C2503	*F2	C3502	*K2	C3824	*J4	C3950	*J4	C4777	*L6	C4869	*K6	CL106	E5	CL1026	E4	E1400	C2	IC602	B6	L2252	*K1	R225	*D7	R323	E7	R484	C4
C164	E7	C609	A6	C1225	*F6	C1320	*H5	C2504	*F2	C3503	*K2	C3825	*J4	C3951	*J3	C4778	L5	C4870	*K6	CL107	D5	CL1027	E4	E1401	F5	IC603	C6	L2261	*J1	R226	*D7	R324	*E7	R485	C4
C165	E7	C613	B6	C1226	*F6	C1321	*H5	C2505	*F2	C3504	J2	C3826	*J4	C3952	*J3	C4779	*J5	C4871	*K5	CL108	D4	CL1028	D3	E1402	C5	IC608	F7	L2350	*K1	R227	*D7	R325	*D7	R486	C4
C166	E7	C614	B6	C1227	G5	C1322	*H4	C2506	*F2	C3505	J2	C3827	*J4	C3953	*J3	C4780	*K5	C4872	*K5	CL109	D5	CL1029	E4	E1403	E7	IC609	F7	L2353	*J1	R228	*D7	R326	*E7	R487	C4
C167	E7	C615	C6	C1228	F5	C1323	*H5	C2507	*F2	C3508	*J2	C3828	*J2	C3954	*J3	C4781	*K5	C4873	*K5	CL401	D4	CL1030	E4	E1404	*C2	IC610	F7	L5050	G5	R229	*D7	R327	*D7	R488	C4
C168	E7	C616	*C6	C1229	C3	C1324	*F6	C2508	*F2	C3509	*H2	C3829	*J3	C3955	*J3	C4782	*K5	C4874	*K5	CL402	D4	CL1201	F6	E1405	*F5	IC611	G7	L5051	H7	R230	*D7	R328	*E7	R489	C4
C169	*D7	C617	*C6	C1230	B3	C1400	D3	C2509	*F2	C3510	*K4	C3830	*J3	C3956	*J3	C4783	*K5	C4875	*K5	CL403	D4	CL1202	E4	E1406	*C5	IC614	*C6	L7000	B7	R231	*D7	R329	E7	R490	C4
C170	*D7	C622	F7	C1231	*F5	C1402	*G3	C2510	*F2	C3511	*J4	C3831	*J3	C3957	*J3	C4784	*K5	C4876	*K5	CL404	C4	CL1203	F4	E1407	*E7	IC615	*C6	L7001	A7	R232	*D7	R330	E7	R491	C4
C171	D7	C623	F7	C1232	*F5	C1403	D3	C2511	*F2	C3512	*H3	C3832	*J3	C4000	K7	C4785	*K6	C4877	*K6	CL405	C4	CL1400	D3	E6000	H2	IC701	D2			R233	*D7	R400	D4	R492	C4
C172	D7	C624	F7	C1233	*E4	C1406	*D3	C2512	*F2	C3513	*K3	C3833	*J3	C4001	*K7	C4786	*L6	C4878	*K5	CL406	C4	CL1401	D3	E6001	*H2	IC702	E3	Q1001	B2	R234	*D7	R401	D4	R493	C4
C173	*E7	C625	F7	C1234	*E4	C1407	*B2	C2513	*F2	C3514	*J4	C3834	*J3	C4002	K7	C4787	*L5	C4879	*K5	CL407	C4	CL2500	G2	E6002	J7	IC703	D1	Q1201	*G6	R235	*D7	R402	D4	R494	C4
C174	*E7	C704	D2	C1235	*E4	C1408	*B2	C2514	*F2	C3515	*H2	C3835	*J3	C4003	*K7	C4788	*K5	C4880	*K5	CL408	C4	CL2501	F2	E6003	*J7	IC1000	B2	Q1203	*G6	R236	*D7	R403	D4	R495	C3
C175	*E7	C705	D2	C1236	*E4	C1411	D3	C2515	*F2	C3516	J2	C3836	*J3	C4004	K7	C4789	*K5	C4881	*K5	CL409	C4	CL2502	F2	E6004	M4	IC1001	C2	Q1204	*G5	R237	*D7	R404	*D4	R496	C3
C176	E7	C707	D2	C1237	*E4	C1412	D3	C2516	*F2	C3517	*H2	C3837	*J2	C4005	*K7	C4790	*K5	C5000	*K2	CL410	C4	CL2503	F2	E6005	*M4	IC1002	C2	Q1205	*G6	R238	*D7	R405	D4	R497	C4
C177	E7	C709	*E5	C1238	*E4	C1413	D3	C2517	*F2	C3518	K3	C3838	*J3	C4006	K7	C4791	*K5	C5001	J6	CL411	C3	CL3000	J4	E6006	M7	IC1004	C2	Q1206	*H5	R239	*D7	R406	*D4	R498	C4
C178	D7	C710	*E5	C1239	*E4	C1414	D3	C2518	F2	C3519	K3	C3839	*J3	C4007	*K7	C4792	*K5	C5002	*J6	CL412	C3	CL3500	K3	E6007	*M7	IC1005	C2	Q1207	*H5	R240	D7	R407	*D4	R499	C3
C185	*D7	C711	*E5	C1240	*E4	C2000	H7	C2519	*G2	C3520	J2	C3840	*J3	C4008	K7	C4793	*K5	C5003	*K2	CL413	C3	CL3501	K3			IC1006	C2	Q1210	*F6	R241	D7	R408	*D4	R500	C3
C186	*D7	C712	*E5	C1241	*E4	C2001	G7	C2520	*F2	C3521	J2	C3841	*J3	C4009	*K7	C4794	*K6	C5004	J6	CL414	C3	CL4750	J5	F7000	C7	IC1010	D1	Q1211	*F6	R242	D7	R409	D4	R501	C4
C187	*D7	C713	F4	C1242	*E4	C2002	G7	C2521	*F2	C3750	L2	C3842	*J4	C4010	*K7	C4795	*K6	C5005	H6	CL415	C3	CL5000	G6	F7001	B7	IC1201	*F6	Q1212	C3	R243	D7	R410	D4	R502	C4
C188	D7	C714	E3	C1243	*D3	C2003	*G7	C2522	*F2	C3751	K2	C3843	*J4	C4011	*K7	C4796	*K5	C5006	*L4	CL416	C4	CL5001	G6			IC1202	C6	Q1400	*B1	R244	D7	R411	*D4	R503	C3
C189	D7	C715	E3	C1244	*D3	C2004	G7	C2523	*G2	C3752	*J2	C3844	*J4	C4012	*K7	C4797	*K5	C5007	*M4	CL417	C4	CL5002	H6	FB1	D3	IC1300	D1	Q1401	*B1	R245	D7	R412	*D4	R504	C3
C190	D7	C716	D1	C1245	*D3	C2005	*H7	C2524	*F2	C3753	*J2	C3845	*J3	C4250	*P7	C4798	*K5	C5008	*J6	CL418	C4	CL5003	H6	FB2	D3	IC1301	*H5	Q1402	*B1	R246	D7	R413	*D4	R505	C4
C191	*E7	C717	E2	C1246	*E4	C2006	*H7	C2525	*F2	C3754	*J2	C3846	*M2	C4251	*P6	C4799	*K5	C5009	*J5	CL419	C4	CL7000	L7	FB700	E2	IC1400	*F3	Q1403	*B1	R247	D7	R414	*D4	R506	C4
C192	*E7	C718	E2	C1247	*D3	C2007	*H7	C2526	*F2	C3755	*J3	C3847	*M2	C4252	*P6	C4800	*K6	C5010	*H6	CL421	C4	CL7001	L7	FB701	E3	IC1401	D3	Q1404	*A1	R248	D7	R415	*D4	R507	C3
C193	*E7	C719	E2	C1248	*D3	C2008	*H7	C2527	*G2	C3756	*J3	C3848	*M2	C4253	*P6	C4801	*L5	C5011	*H6	CL422	C4	CL7002	L7	FB702	F3	IC1402	D3	Q2500	*G1	R249	D7	R416	*D4	R508	C3
C194	*D7	C720	E2	C1249	*D3	C2009	G7	C2528	F2	C3757	*J3	C3849	*J3	C4254	*P6	C4802	*K5	C5012	*H6	CL423	C4	CL7003	L7	FB703	F2	IC1403	*D3	Q2501	*G1	R250	D7	R417	*D4	R509	C5
C195	E7	C721	F2	C1250	*D3	C2010	G7	C2529	F2	C3758	*J2	C3850	L2	C4255	*P6	C4803	*K6	C5013	*H6	CL424	C4	CL7004	L7	FB704	*D2	IC1404	*B2	Q2503	F2	R251	D7	R418	*D4	R510	*C4
C196	E7	C722	F2	C1251	*D3	C2011	*G7	C2530	F2	C3759	*J2	C3851	*L2	C4256	*P5	C4804	*L5	C5014	*H6	CL425	C4	CL7005	L7	FB705	*F3	IC1501	*F2	Q2504	F2	R252	D7	R419	*D4	R511	*C4
C197	E7	C723	E2	C1252	*D3	C2012	*G7	C2531	F2	C3760	*J2	C3852	*L2	C4257	*P5	C4805	*K5	C5015	*H6	CL426	C4	CL7006	L7	FB706	*E3	IC1502	*F2	Q5050	*G5	R253	D7	R420	D4	R512	*C4

SRW-5800

R513	*C4	R756	E3	R1048	*E4	R1243	D4	R2022	*G7	R2506	*G2	R3318	K2	R3543	H3	R4011	*K7	R4279	*N6	R4371	*P7	R4463	*P5	R4815	J5	R7011	*M7	RB112	E6	S1000	A1
R514	*C4	R757	E2	R1049	*D4	R1244	D4	R2023	*G7	R2507	F2	R3319	K2	R3544	K3	R4012	K7	R4280	*N6	R4372	*P6	R4464	*P5	R4816	J5	R7012	M7	RB113	E6	S1001	A1
R515	*C4	R758	E3	R1050	*E4	R1245	D4	R2024	M7	R2508	F2	R3320	K2	R3545	K3	R4013	K7	R4281	*N6	R4373	*P6	R4465	*P5	R4817	*L5	R7013	*M7	RB114	E6	S1400	A2
R516	*C4	R759	E2	R1051	*E4	R1246	D4	R2025	M7	R2509	F2	R3321	K2	R3546	K3	R4014	*K7	R4282	*N6	R4374	*P6	R4466	*P5	R4818	*L5	R7014	M7	RB115	E6	S1401	A2
R517	*C3	R760	E3	R1052	C2	R1247	D4	R2026	M7	R2510	F2	R3322	K2	R3547	K3	R4015	*K7	R4283	*N6	R4375	*P6	R4467	*P4	R4819	*L5	R7015	M7	RB400	*C4	S1402	A2
R518	*C3	R761	E3	R1053	E3	R1248	D4	R2027	M7	R2511	F2	R3323	K2	R3548	H3	R4016	K7	R4284	*N6	R4376	*P6	R4468	*P4	R4820	*L4	R7016	M7	RB401	*C3	S1403	A2
R519	*C3	R762	E3	R1054	*D4	R1249	D4	R2028	M7	R2512	*F2	R3324	K3	R3549	H3	R4017	K7	R4285	*N6	R4377	*P6	R4469	*P4	R4821	J6	R7017	M7	RB402	*C4	S1404	B2
R520	*C3	R763	E3	R1055	D4	R1250	D4	R2029	M7	R2513	G2	R3325	K3	R3550	H3	R4018	*K7	R4286	*N6	R4378	*P6	R4470	*P4	R4822	J5	R7018	M7	RB403	*C4	S3000	G1
R521	*C3	R764	E3	R1056	E4	R1251	D4	R2030	M7	R2514	G2	R3326	K3	R3551	H3	R4019	*K7	R4287	*N6	R4379	*P6	R4471	*P4	R4823	J5	R7019	L7	RB404	C4	S3001	H1
R522	*C3	R765	E3	R1057	C2	R1252	D4	R2031	M7	R2515	G2	R3327	K3	R3552	K3	R4020	*K7	R4288	*N6	R4380	*P6	R4472	*P3	R4824	*L5	R7020	L7	RB405	C4	S4500	H1
R523	*C3	R766	E3	R1058	E4	R1253	D4	R2032	L7	R2517	F3	R3328	K3	R3553	K3	R4021	*K7	R4289	*N6	R4381	*P6	R4473	*P3	R4825	*L5	R7021	L7	RB406	*C4	S4501	H1
R524	*C3	R767	E3	R1059	E4	R1254	D4	R2033	L7	R2518	F3	R3329	K3	R3554	H3	R4022	*K7	R4290	*N6	R4382	*P6	R4474	*P3	R4826	*L4	R7022	*N7	RB407	*C4	S5000	H7
R525	*C3	R768	E3	R1060	E4	R1255	D4	R2034	L7	R2520	F3	R3330	K3	R3555	H3	R4023	*K7	R4291	*N6	R4383	*P6	R4475	*P3	R4827	*L4	R7023	*M7	RB618	F7	S900	G2
R526	C4	R769	D1	R1061	*E4	R1257	*F6	R2035	L7	R2521	F3	R3331	K3	R3556	K3	R4024	*K7	R4292	*N6	R4384	*P6	R4476	*P3	R4828	J5	R7024	*N7	RB619	F7		
R527	C4	R770	D1	R1062	E3	R1258	*F5	R2036	L7	R2523	F3	R3332	K3	R3557	*J3	R4025	*K7	R4293	*N6	R4385	*P6	R4477	*P6	R4829	J5	R7025	*M7	RB620	F7	SORI01	A5
R528	C4	R771	D1	R1063	E3	R1262	*F6	R2037	L7	R2524	F3	R3333	K3	R3558	*H3	R4026	K5	R4294	*N6	R4386	*P6	R4478	*P6	R5000	*J6	R7026	M7	RB621	F7	SORI02	P5
R529	C4	R772	D1	R1064	E4	R1263	*F6	R2038	*G7	R2527	F2	R3334	*K3	R3559	*H3	R4027	K5	R4295	*N6	R4387	*P5	R4479	*P6	R5001	*H6	R7027	*M7	RB622	G7		
R530	C4	R773	E1	R1065	E4	R1264	C3	R2039	*C4	R2528	F2	R3335	*K3	R3560	*H2	R4028	K4	R4296	*N6	R4388	*P5	R4480	*P4	R5002	*H6	R7028	M7	RB623	F7	TP700	D2
R531	C4	R774	E1	R1066	*E4	R1265	C2	R2041	*C4	R3000	G1	R3336	*K3	R3561	*H2	R4029	K4	R4297	*N5	R4389	*P5	R4481	*P4	R5003	*F1	R7029	*M7	RB624	F7	TP1400	B1
R532	C4	R775	*E3	R1068	E3	R1266	C3	R2042	*C4	R3001	G1	R3337	*K3	R3562	*H2	R4030	K5	R4298	*N5	R4390	*P5	R4482	*P2	R5004	*F1	R7030	M7	RB625	F7	TP1401	B1
R533	C4	R776	*E3	R1069	E5	R1300	D1	R2043	*D4	R3002	G1	R3338	*K3	R3563	J2	R4031	K5	R4299	*N5	R4391	*P6	R4483	*P2	R5005	*J6	R7031	*M7	RB626	F7	TP1402	B1
R534	*C4	R777	E2	R1071	D4	R1301	D1	R2044	*C4	R3003	H1	R3339	*K3	R3564	J2	R4032	K4	R4300	*N5	R4392	*P5	R4500	H1	R5006	*G1	R7032	M7	RB627	G7	TP1403	A1
R535	*C4	R778	E2	R1072	D3	R1302	*D2	R2045	*C4	R3004	H1	R3340	*K3	R3565	J2	R4033	K4	R4301	*N6	R4393	*P5	R4501	H1	R5007	*G1	R7033	*M7	RB628	F7	TP1404	A1
R536	*C4	R779	E2	R1073	E3	R1303	*D2	R2046	*G7	R3005	H1	R3341	*K3	R3566	J2	R4034	K5	R4302	*N5	R4394	*P5	R4502	H1	R5008	*G1	R7034	M7	RB629	F7	TP1405	A1
R537	*C4	R780	E2	R1074	D3	R1304	*D2	R2047	*G7	R3250	*K2	R3342	*K2	R3567	*H2	R4035	K5	R4303	*N5	R4395	*P5	R4503	H1	R5009	*F1	R7035	*M7	RB630	F7	TP1406	A1
R538	*C4	R781	E2	R1076	*E4	R1305	*D2	R2050	*G6	R3251	*K3	R3343	*K3	R3568	*H2	R4036	K4	R4304	*N5	R4396	*P5	R4504	H1	R5010	*F1	R7036	M7	RB631	F7	TP1407	A1
R539	*C4	R782	E2	R1077	E5	R1306	*D2	R2051	*G6	R3252	K3	R3344	*K3	R3569	*H2	R4037	K4	R4305	*N5	R4397	*P5	R4505	H1	R5011	*G1	R7037	M7	RB632	F7	TP2000	F1
R540	*C4	R783	E2	R1078	*E5	R1307	*D2	R2052	*G7	R3253	K3	R3345	*K3	R3570	J2	R4038	K5	R4306	*N5	R4398	*P4	R4750	*J5	R5012	*G1	R7038	M7	RB633	F7	TP2001	F1
R541	*C4	R784	E2	R1079	*E5	R1308	*D1	R2053	*G7	R3254	*K3	R3346	*K2	R3571	J2	R4039	K5	R4307	*N5	R4399	*P4	R4751	*J5	R5013	*J6	R7039	M7	RB634	F7	TP2002	H7
R542	C6	R785	E2	R1080	E5	R1309	*D1	R2054	*G6	R3255	*K3	R3347	*K2	R3572	J2	R4040	K4	R4308	*N4	R4400	*P5	R4752	K4	R5014	*H6	R7040	M7	RB635	F7	TP2003	F1
R543	C6	R786	E2	R1081	*E5	R1310	*D1	R2055	*G6	R3256	K4	R3348	*K2	R3573	J2	R4041	K4	R4309	*N4	R4401	*P5	R4753	K4	R5015	*H6	R7041	L7	RB636	F7	TP3000	G1
R544	*C5	R787	F3	R1082	D3	R1311	*H5	R2056	G5	R3257	K3	R3349	*K2	R3574	*H2	R4042	K5	R4310	*N5	R4402	*P5	R4754	K7	R5016	*L2	R7042	L7	RB637	F7	TP3001	G1
R545	C6	R788	F3	R1083	D4	R1312	*H5	R2057	G5	R3258	*K3	R3350	K3	R3575	*H2	R4043	L5	R4311	*N5	R4403	*P4	R4755	J7	R5017	*H6	R7043	L7	RB638	G7	TP3002	G1
R546	C4	R928	E4	R1084	D3	R1313	*H5	R2058	G5	R3259	*K3	R3351	K3	R3576	K3	R4044	*K5	R4312	*N5	R4404	*P4	R4756	K7	R5018	*L5	R7044	J7	RB900	*H3	TP4500	H1
R547	D4	R929	E4	R1085	D3	R1314	*H5	R2250	*K1	R3260	*K3	R3352	*K3	R3577	K3	R4045	*K5	R4313	*N4	R4405	*P5	R4757	K7	R5019	*J5	R7045	*J7	RB901	*H2	TP4501	H1
R602	A6	R930	*E4	R1086	B2	R1315	*H5	R2251	*K1	R3261	*K3	R3353	*K3	R3578	K3	R4046	*K5	R4314	*N4	R4406	*P4	R4758	*L5	R5020	H6	R7046	J7	RB902	*H3	TP4502	H1
R603	B6	R931	E4	R1087	B2	R1316	*H5	R2252	*K1	R3262	*K3	R3354	K3	R3579	K3	R4047	*K5	R4315	*N4	R4407	*P3	R4759	*L5	R5021	H6	R7047	*J7	RB903	*H2	TP5000	M4
R604	B6	R937	E4	R1088	B2	R1317	*H4	R2261	*K1	R3263	*K3	R3355	K3	R3584	*K2	R4048	*K5	R4316	*N4	R4408	*P3	R4760	J5	R5022	H6	R7048	J7	RB904	*H3	TP5001	H7
R605	C6	R938	*E4	R1089	D3	R1400	D3	R2262	*K1	R3264	*K3	R3356	*K3	R3585	K2	R4049	*K5	R4317	*N3	R4409	*P3	R4761	J5	R5023	H6	R7049	*J7	RB905	*H3	TP5002	H7
R606	*C6	R939	*E4	R1090	B2	R1401	D3	R2265	*K1	R3265	*K3	R3357	*K3	R3586	*J2	R4050	*L4	R4318	*N3	R4410	*P3	R4762	*J5	R5024	H6	R7050	J7	RB906	*H3		
R607	C7	R940	*E4	R1091	C2	R1404	D3	R2268	*K2	R3266	*K3	R3358	L3	R3587	*J2	R4051	*L4	R4319	*N3	R4411	*P4	R4763	*J5	R5025	H6	R7051	*J7	RB907	*H3	X700	E3
R610	C6	R941	*E4	R1092	C2	R1405	D3	R2269	*K1	R3267	*K3	R3359	L3	R3596	*J2	R4052	*K5	R4320	*N3	R4412	*P3	R4764	J7	R5026	H6	R7052	J7	RB908	*H3	X1400	D3
R611	A6	R942	E4	R1093	C2	R1406	D3	R2274	*K1	R3268	*K3	R3360	*L4	R3597	*J2	R4053	*L5	R4321	*N4	R4413	*P3	R4765	J7	R5027	H6	R7053	*J7	RB909	*H3	X2500	G1
R612	A6	R943	*E4	R1094	B2	R1407	D3	R2275	*K1	R3269	*K3	R3361	*L4	R3598	K2	R4054	*L4	R4322	*N3	R4414	*P3	R4766	J7	R5028	*H6	R7054	J7	RB910	*H3	X2501	G1
R613	B6	R944	E4	R1095	C2	R1408	D3	R2278	*K2	R3270	*K3	R3362	L2	R3599	*K2	R4055	*L4	R4323	*N3	R4415	*P3	R4767	J7	R5029	H5	R7055	*H7	RB911	*H3	X2503	F3
R704	*D2	R945	E4	R1097	B2	R1409	D3	R2279	*K2	R3271	*K3	R3363	L2	R3601	J2	R4056	*L5	R4324	*N3	R4416	*P3	R4768	*J5	R5030	G6	R7056	H7	RB912	*H3	X2504	F3
R705	*D2	R946	*E4	R1098	D1	R1410	D3	R2281	*K2	R3272	*K3	R3364	*L3	R3602	J2	R4057	*L5	R4325	*N3	R4417	*P3	R4769	*J5	R5031	*G6	R7057	*H7	RB913	*H3		
R706	*D2	R947	E4	R1099	D1	R1412	D3	R2282	*K2	R3273	*K3	R3365	*L3	R3603	J2	R4058	*L5	R4326	*N3	R4418	*P3	R4770	*J5	R5050	*G5	R7058	H7	RB914	*H4	*:B SIDE	
R709	D2	R948	*E4	R1100	*E4	R1413	*F3	R2284	*K2	R3274	*K3	R3366	L3	R3604	J2	R4059	*L5	R4327	*N3	R4419	*P3	R4771	*J5	R5051	*G5	R7059	*G7	RB916	*H4		
R710	D2	R949	*E4	R1101	E4	R1414	*F3	R2285	*K2	R3275	*K3	R3367	*L4	R3609	J2	R4060	*L4	R4328	*N3	R4420	*P3	R4772	K5	R5052	*G5	R7060	G7	RB917	*H4		
R712	E2	R950	*H3	R1102	C1	R1415	*F3	R2286	*K2	R3276	*K3	R3368	L2	R3610	J2	R4061	*L4	R4329	*N3	R4421	*P3	R4773	K4	R5053	*H7	R7061	G7	RB918	*H4		
R713	E2	R1000	B2	R1103	*E4	R1416	*F3	R2287	*K2	R3277	*K3	R3369	*L3	R3611	J2	R4062	*K5	R4330	*N3	R4422	*P3	R4774	K5	R5054	*H7	R7062	*G7	RB919	*H4		
R715	D2	R1001	B2	R1104	*E4	R1417	*F3	R2290	*J2	R3278	*L2	R3370	L4	R3615	J2	R4063	*K5	R4331	*N3	R4423	*P3	R4775	K4	R5055	*H7	R7063	G7	RB920	*H4		
R716	E5	R1003	B2	R1105	E4	R1418	*F3	R2291	*J2	R3279	*L3	R3371	*L3	R3616	J2	R4064	*K5	R4332	*N3	R4424	*P3	R4776	K4	R5056	M4	R7064	G7	RB921	*H4		
R717	E5	R1004	B2	R1106	E4	R1419	*F3	R2292	*J2	R3280	L3	R3372	L3	R3617	J2	R4065	*K5	R4333	*N3	R4425	*P3	R4777	L5	R5057	H6	R7065	G7	RB922	*H4		
R718	E5	R1005	C2	R1107	*E4	R1420	D3	R2293	*J2	R3281	L2	R3373	*L2	R3618	J2	R4066	*K5	R4334	*N3	R4426	*P3	R4778	L5	R5058	H6	R7066	J7	RB924	H2		
R719	E5	R1006	C2	R1108	*E4	R1430	*D3	R2296	*J2	R3282	*L3	R3500	J2	R3619	J2	R4067	*K5	R4335	*N3	R4427	*P2	R4779	L5	R5059	H7	R7067	*J7	RB1400	*A2		
R720	E5	R1007	C2	R1109	*E4	R1431	*D3	R2297	*J2	R3283	*L4	R3501	*K2	R3620	J2	R4068	*K5	R4336	*N3	R4428	*P2	R4780	*L6	R5060	J7	R7068	J7	RB1401	*A2		
R721	E5	R1008	C2	R1110	*E4	R1440	B1	R2299	*J2	R3284	L4	R3502	J2	R3621	J2	R4069	*K5	R4337	*N2	R4429	*P2	R4781	*L6	R5061	G6	R7069	*J7	RB1402	*A2		
R722	E5	R1009	C2	R1111	B2	R1441	B1	R2300	*J2	R3285	L3	R3504	*J2	R3622	J2	R4070	*K5	R4338	*N2	R4430	*P2	R4782	K5	R6000	*M2	R7070	J7	RB1403	*A2		
R723	E5	R1010	C2	R1112	B2	R1442	B1	R2302	*J2	R3286	K4	R3505	J2	R3623	J2	R4071	*K5	R4339	*N2	R4431	*P2	R4783	*L5	R6001	*M2	R7071	*J7	RB1404	*A2		
R725	E5	R1011	C2	R1203	*F6	R1443	B1	R2307	*J1	R3287	K4	R3506	*K2	R3624	J2	R4072	*K5	R4340	*N2	R4432	*P2	R4784	L7	R6002	*M3	R7072	J7	RB1405	*A2		
R726	F5	R1012	C2	R1204	*F6	R1444	A1	R2310	*J1	R3288	K4	R3507	J2	R3625	J2	R4073	*K5	R4341	*N2	R4433	*P2	R4785	L7	R6003	*M2	R7073	*J7	RB1406	*A2		
R727	E5	R1014	C2	R1205	*F6	R1446	D3	R2315	*J1	R3289	K4	R3509	*H2	R3626	J2	R4250	*N4	R4342	*N2	R4434	*P2	R4786	J7	R6004	*M2	R7074	J7	RB1407	*A2		
R728	E5	R1015	C2	R1208	*F6	R1447	D3	R2316	*J1	R3290	K4	R3510	*J2	R3627	J2	R4251	*N3	R4343	*N2	R4435	*P2	R4787	J7	R6005	*M2	R7075	*H7	RB1408	B2		
R729	E5	R1016	D2	R1209	*F6	R1448	D3	R2319	*J1	R3291	K4	R3511	*J2	R3628	H2	R4252	*N2	R4344	*N2	R4436	*P2	R4788	J5	R6009	*M1	R7076	H7	RB1409	B2		
R730	F5	R1017	D2	R1213	*F6	R1449	D3	R2322	*J1	R3292	K4	R3512	*J2	R3629	H2	R4253	*N6	R4345	*N2	R4437	*P2	R4789	J5	R6010	*M1	R7077	*H7	RB1412	*B2		
R731	F5	R1018	D2	R1214	*F6	R1450	*B1	R2350	*K1	R3293	K4	R3513	*J4	R3630	*J2	R4254	*N5	R4346	*N2	R4438	*P2	R4790	L5	R6011	*M1	R7078	H7	RB1413	*B2		
R732	E5	R1019	*E3	R1215	*F6	R1451	*B2	R2351	*L1	R3294	K4	R3514	*K4	R3631	*J2	R4255	*N4	R4347	*N2	R4439	*P2	R4791	L5	R6012	*L6	R7079	*H7	RB1414	D3		
R733	E5	R1020	*E3	R1217	*F6	R1452	B2	R2352	*L1	R3295	K4	R3515	*K4	R3632	*J2	R4256	*N5	R4348	*N2	R4440	*P2	R4792	L5	R6013	*L6	R7080	H7	RB1415	*B2		
R734	E4	R1021	D3	R1221	*F6	R2000	H7	R2353	*L1	R3296	K4	R3516	*J4	R3633	*J2	R4257	*N5	R4349	*N2	R4441	*P2	R4793	*L5	R6017	*L1	R7081	*G7	RB1416	*B2		
R735	F5	R1022	*D3	R1222	*F6	R2001	G7	R2354	*K1	R3297	K4	R3517	*J4	R3634	*J2	R4258	*N5	R4350	*N2	R4442	*P2	R4794	J5	R6018	*L1	R7082	G7	RB1417	*B1		
R736	E3	R1023	*D3	R1223	*F5	R2002	G7	R2355	*L1	R3298	K4	R3518	*H3	R3635	*J2	R4259	*N5	R4351	*N2	R4443	*P2	R4795	J5	R6019	*L1	R7083	G7	RB1418	*B1		
R737	E3	R1024	*D3	R1224	*F6	R2003	G7	R2356	*K1	R3299	K4	R3519	*H3	R3636	*J2	R4260	*N5	R4352	*N2	R4444	*P2	R4796	J5	R6020	*L1	R7084	G7	RB1419	*B2		
R738	E3	R1025	D3	R1225	*F6	R2004	G7	R2357	*L2	R3300	K4	R3520	*K3	R3637	*J2	R4261	*N5	R4353	*N2	R4445	*P2	R4797	J5	R6021	*L1	R7100	*D7	RB2006	*F7		
R739	E3	R1026	*A1	R1226	*F5	R2005	*H7	R2358	*K1	R3301	K4	R3521	*K3	R3638	*H2	R4262	*N4	R4354	*N2	R4446	*P4	R4798	L5	R6022	*L1	R7101	*D7	RB2007	*F7		
R740	E3	R1027	C2	R1227	*F6	R2006	H7	R2359	*K1	R3302	*K4	R3522	*J4	R3639	*H2	R4263	*N4	R4355	*N2	R4447	*P4	R4799	L5	R6023	*L1	R7102	*D7	RB2008	*F7		
R741	F5	R1028	C2	R1228	*F5	R2007	*H7	R2360	*J2	R3303	*K4	R3523	*J4	R3640	H2	R4264	*N4	R4356	*N4	R4448	*P4	R4800	L6	R6024	*L1	R7103	*D7	RB2009	*F7		
R742	E3	R1029	D3	R1229	*F5	R2008	*H7	R2361	*K1	R3304	*K4	R3524	J4	R3641	H2	R4265	*N4	R4357	*N4	R4449	*P4	R4801	*L6	R6025	*M1	R7104	*D7	RB2010	*F7		
R743	E3	R1030	*D4	R1230	*F5	R2009	G7	R2362	*J1	R3305	*K4	R3526	*K3	R3642	J2	R4266	*N3	R4358	*N4	R4450	*P4	R4802	J5	R6026	*M1			RB2011	*F7		
R744	E3	R1033	C2	R1231	*E4	R2010	G7	R2363	*J1	R3306	*K4	R3527	*K3	R3643	J2	R4267	*N3	R4359	*N4	R4451	*P4	R4803	J6	R6027	*M2	RB100	*D6	RB2014	*F6		
R745	E3	R1034	*E5	R1232	*C3	R2011	*H7	R2364	*J1	R3307	*K4	R3528	H3	R4000	K7	R4268	*N3	R4360	*N4	R4452	*P4	R4804	J6	R7000	*N7	RB101	*D6	RB2015	*F6		
R746	E3	R1035	*D4	R1233	*E5	R2012	*H7	R2365	*J1	R3308	*K4	R3529	H3	R4001	K7	R4269	*N3	R4361	*N4	R4453	*P4	R4805	J6	R7001	*N7	RB102	*D6	RB2016	*F6		
R747	E3	R1037	*D4	R1234	D3	R2013	*H7	R2366	*K1	R3309	*K4	R3530	*J4	R4002	*K7	R4270	*N3	R4362	*N4	R4454	*P4	R4806	*L5	R7002	*N7	RB103	*D6	RB2017	*F6		
R748	E3	R1038	E4	R1235	D4	R2014	*H7	R2367	*J1	R3310	*K4	R3531	J4	R4003	*K7	R4271	*N6	R4363	*N4	R4455	*P4	R4807	*L5	R7003	*M7	RB104	D6	RB2018	*F6		
R749	E3	R1041	D3	R1236	D4	R2015	G7	R2368	*J1	R3311	*K4	R3533	H4	R4004	K7	R4272	*N6	R4364	*N4	R4456	*P4	R4808	J5	R7004	M7	RB105	D6	RB2019	*F6		
R750	E3	R1042	*D4	R1237	D4	R2016	G7	R2500	*G2	R3312	*K4	R3534	H4	R4005	K7	R4273	*N6	R4365	*N4	R4457	*P3	R4809	J5	R7005	*M7	RB106	E6	RB3000	*H1		
R751	E3	R1043	*D4	R1238	D4	R2017	*G7	R2501	*G2	R3313	*K4	R3535	H3	R4006	*K7	R4274	*N4	R4366	*P7	R4458	*P2	R4810	*L6	R7006	M7	RB107	E6	RB3001	*H1		
R752	E3	R1044	D4	R1239	D4	R2018	G7	R2502	*G2	R3314	*K4	R3536	*H3	R4007	*K7	R4275	*N4	R4367	*P6	R4459	*P6	R4811	*L6	R7007	*M7	RB108	*E6	RB4500	*H1		
R753	E3	R1045	D4	R1240	D4	R2019	*G7	R2503	*G2	R3315	*K4	R3540	H3	R4008	K7	R4276	*N7	R4368	*P6	R4460	*P5	R4812	*J6	R7008	M7	RB109	*E6	RB4501	*H1		
R754	F3	R1046	*D4	R1241	D4	R2020	*G7	R2504	*G2	R3316	*K4	R3541	H3	R4009	K7	R4277	*N6	R4369	*P6	R4461	*P4	R4813	*J6	R7009	*M7	RB110	*E6	RB5000	*L2		
R755	F2	R1047	D4	R1242	D4	R2021	*G7	R2505	*G2	R3317	*K4	R3542	H3	R4010	*K7	R4278	*N6	R4370	*P6	R4462	*P5	R4814	J6	R7010	M7	RB111	*E6	RB5001	*H7		

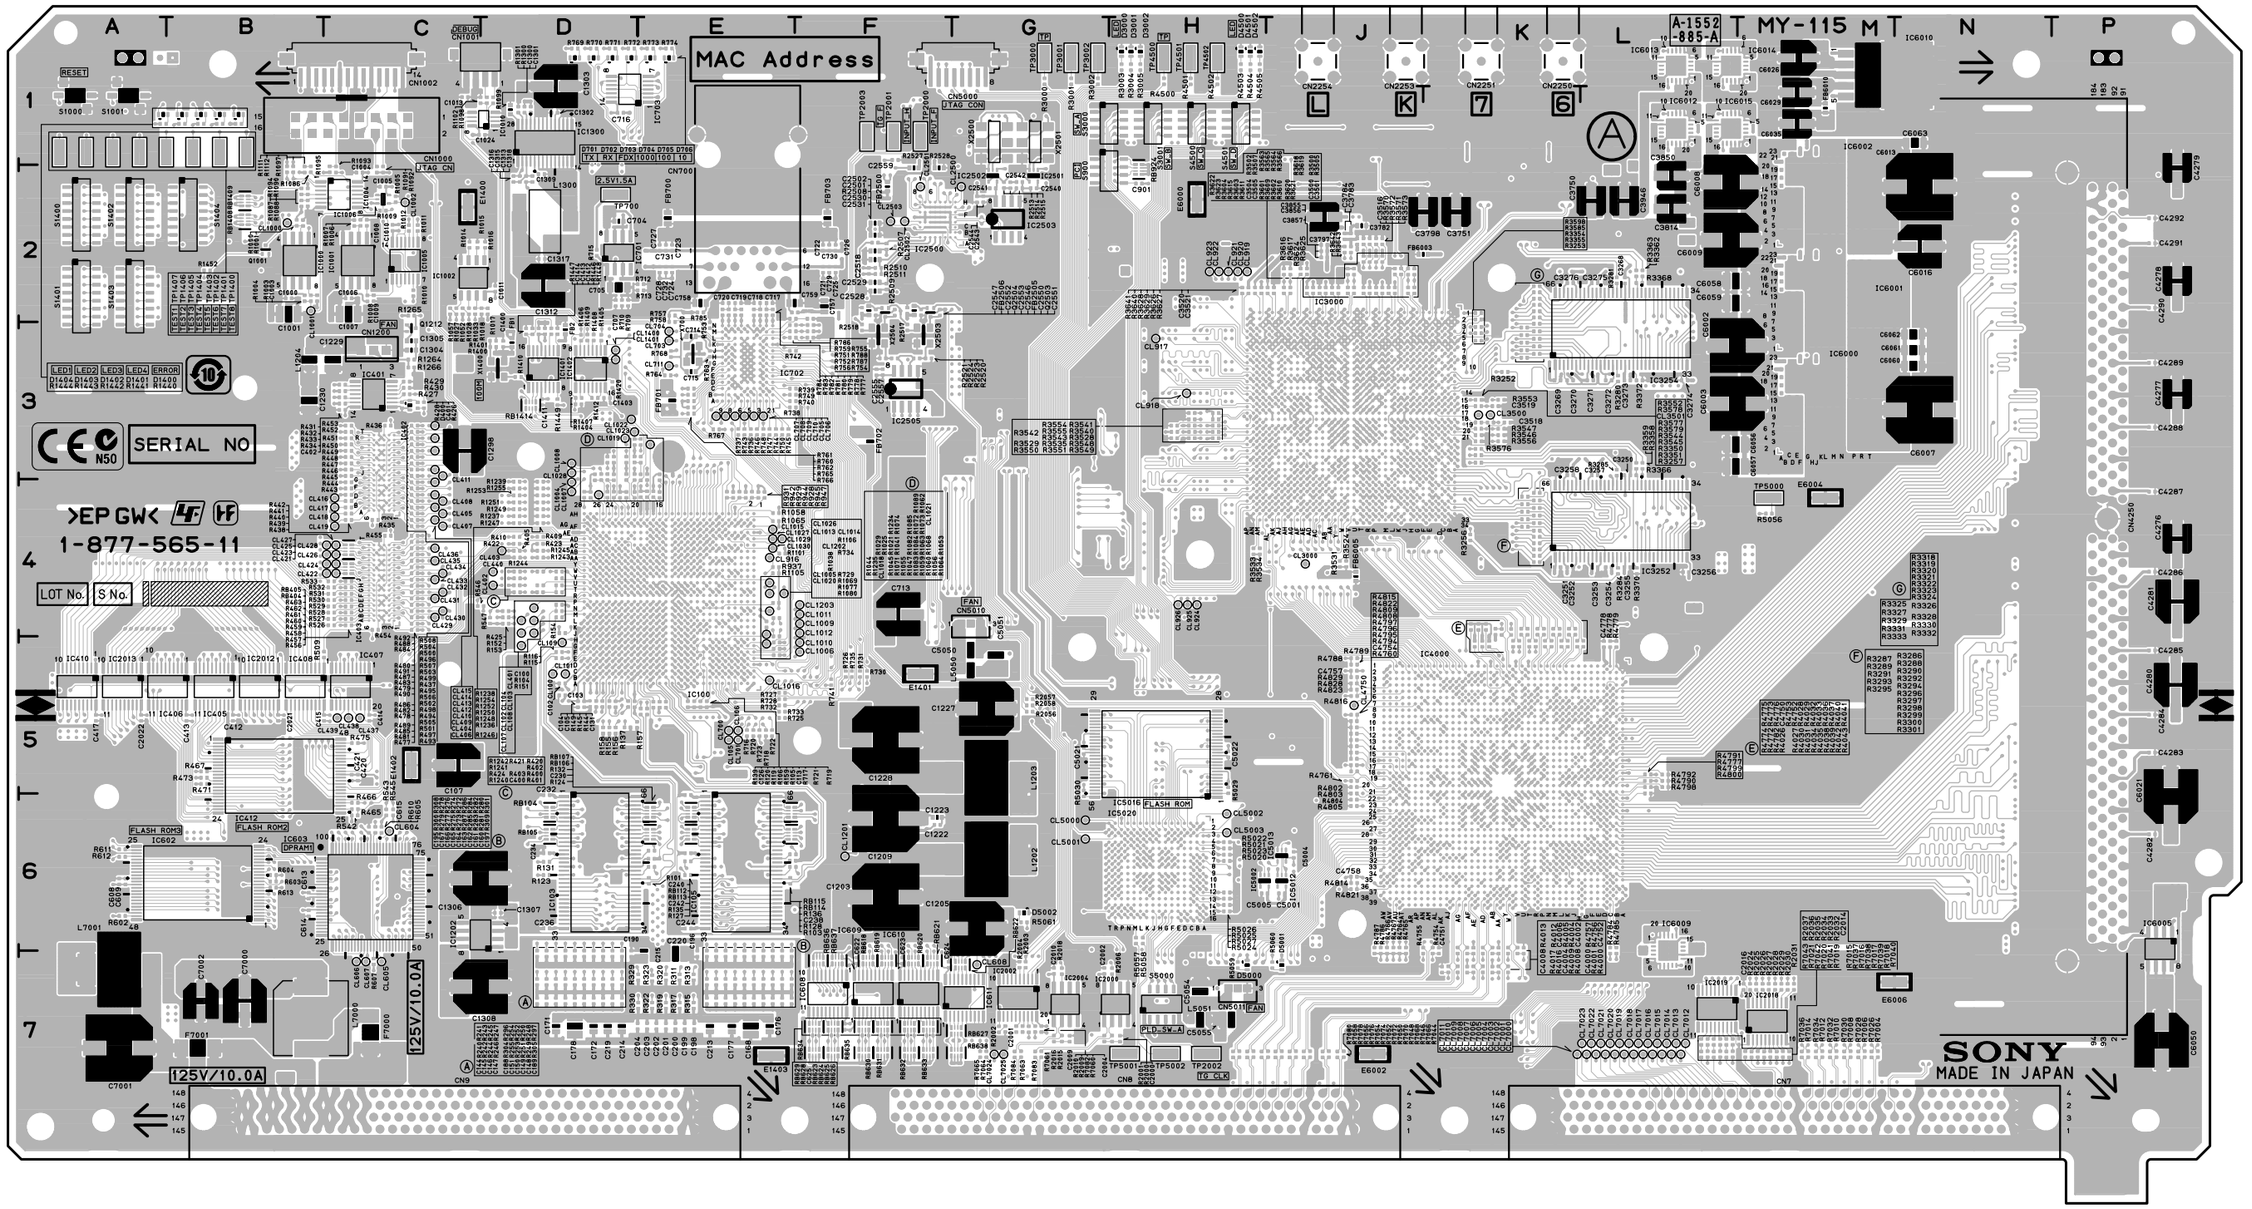

MY-115 -A SIDE-
SUFFIX: -11

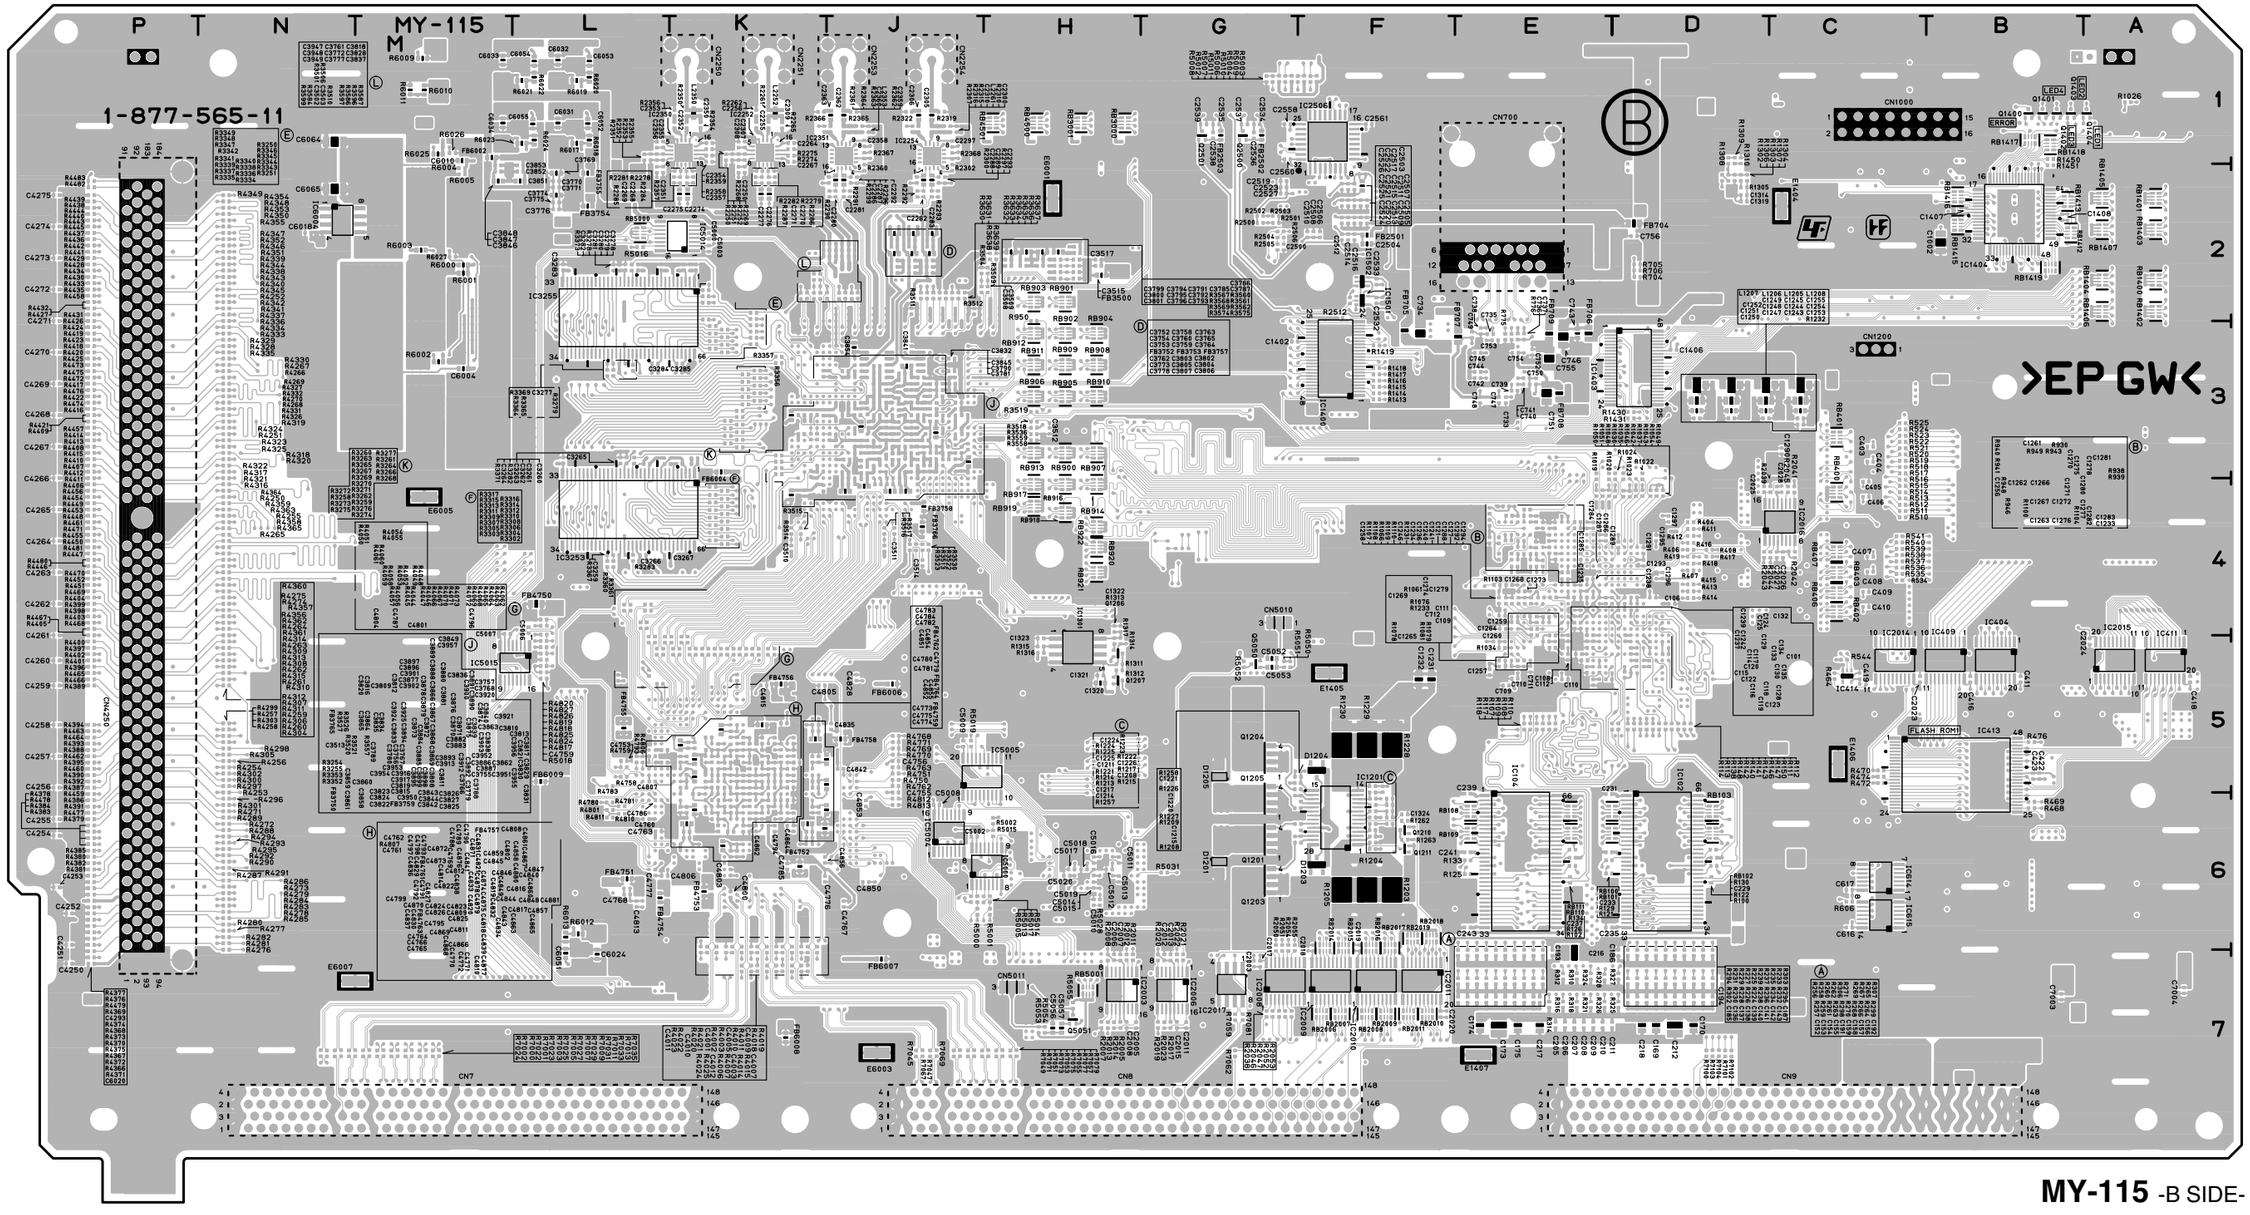

MY-115 -B SIDE-
SUFFIX: -11

SRW-5800 (SY) J, E
9-968-393-05

Sony Corporation

Printed in Japan
2010. 6 08
©2007