Telex®

Technical Data Sheet

Model PH-150 and PH-150R Earset




The model PH-150 / PH-150R earclip is a simple and comfortable alternative to the headband headsets ideal for hands free use. The adjustable mouthpiece allows the user to adjust the microphone for personal preferences.

Key Features:

- Comfortable earclip style headset for unobstructed use.
- · Flexible boom position for ease of use.
- High performance noise-canceling electret microphone.

Wiring Diagram

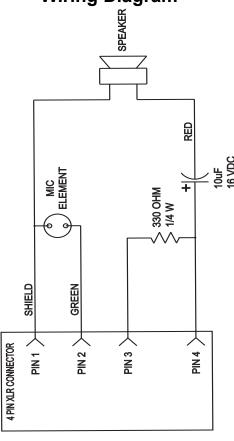

Specifications

Headphone:	
Frequency Response	20 Hz to 10KHz
Impendance	150 Ohms
Sensitivity	100 dB @ 1KHz
Microphone:	J
Element Type	Electret
Frequency Response	100 Hz to 10KHz
Sensitivity	56 dB±2dB
Impedance	2200 Ohms
Cordage:	
Straight	1.2 m
Weight:	

Parts List

Gross Weight (approx.)less than 1oz

Item No.	Description	Qty.	Part No.
1	M/F Plug Converter*	1	539171-020
2	Windscreen	1	57013-001
3	Earbud Cushion Cover	12	59840-006
*The M/E Diver Commenter comment with model DI 1450D Female and			

*The M/F Plug Converter comes with model PH-150R Earset only.

Ordering Information

PH-150	Earclip style, 4 pin female connector	Catalog no. 301358-000
PH-150R	Earclip style, 4 pin male connector	Catalog no. 301358-001



Telex®

Technical Data Sheet

Model PH-120 and PH-120R Earset



The model PH-120 / PH-120R earset is simple and comfortable, as well as a discreet headset option, using an earplug with in-line clip-on microphone. The microphone, which is omni-directional has a built-in cough switch, puts no limitations on the user. Weighing less than 2 ounces, this earset gives the freedom of maneuverability and comfort.

Key Features:

- · Earset style speaker.
- · Clip-on, omni-directional microphone.
- · Built-in cough switch.
- Lightweight components (less than 2 ounces)


Parts List


Item No.	Description	Qty.	Part No.
1	4 pin XLR female connector	1	35320-004
2	4 pin XLR male connector	1	35398-004
3	Earbud cushion cover	12	59840-006

Specifications

Earphone:	
Frequency Response	300 Hz to 5KHz
Impendance	
Sensitivity	100 dB @ 1KHz
Microphone:	
Frequency Response	20Hz to 20KHz
Sensitivity	60 dB@ 1KHz
Impedance	2K Ohms
Cordage:	
Straight	1 m
Weight:	
Gross Weight (approx.)	less than 2oz.

Wiring Diagram





Ordering Information

PH-120 EARSET

PH-120	Earset, earplug, inline microphone, 4 pin female connector	Catalog no. 301361-000
PH-120R	Earset, earplug, inline microphone, 4 pin male connector	Catalog no. 301361-001



38110-205 Rev C 01/2004