

SECTION 7

EXPLODED VIEWS & REPLACEMENT PARTS LIST

Model No. : **AJ-HPX3100G/MC**


Note:

1. *Be sure to make your orders of replacement parts according to this list.
2. Unless otherwise specified, all resistors are in OHMS, K=1,000 OHMS, all capacitors are in MICROFARADS (μ F) P= μ F.
3. The P.C.Board unit marked with "■" shown below the main assembled parts.
4. The parts marked with Ⓔ on the exploded view show the electric parts.
5. IMPORTANT SAFETY NOTICE
Components identified with the mark $\triangle$ have the special characteristics for safety When replacing any of these components, use only the same type.
6. The marking (RTL) indicates the retention time is limited for this item.
After the discontinuation of this assembly in production, it will no longer be available.
7. "M" in Remark column indicates needed in the periodical maintenance.

CONTENTS

FRAME PARTS ASSEMBLY	MPL-1
CAMERA PARTS ASSEMBLY	MPL-3
SIDE CASE (R) PARTS ASSEMBLY	MPL-5
SIDE CASE (L) PARTS ASSEMBLY	MPL-7
LCD PARTS ASSEMBLY	MPL-9
HANDLE PARTS ASSEMBLY	MPL-11
REAR JACK PARTS ASSEMBLY	MPL-13
PACKING PARTS ASSEMBLY	MPL-15
ELECTRICAL REPLACEMENT PARTS LIST	EPL-1

FRAME PARTS ASSEMBLY

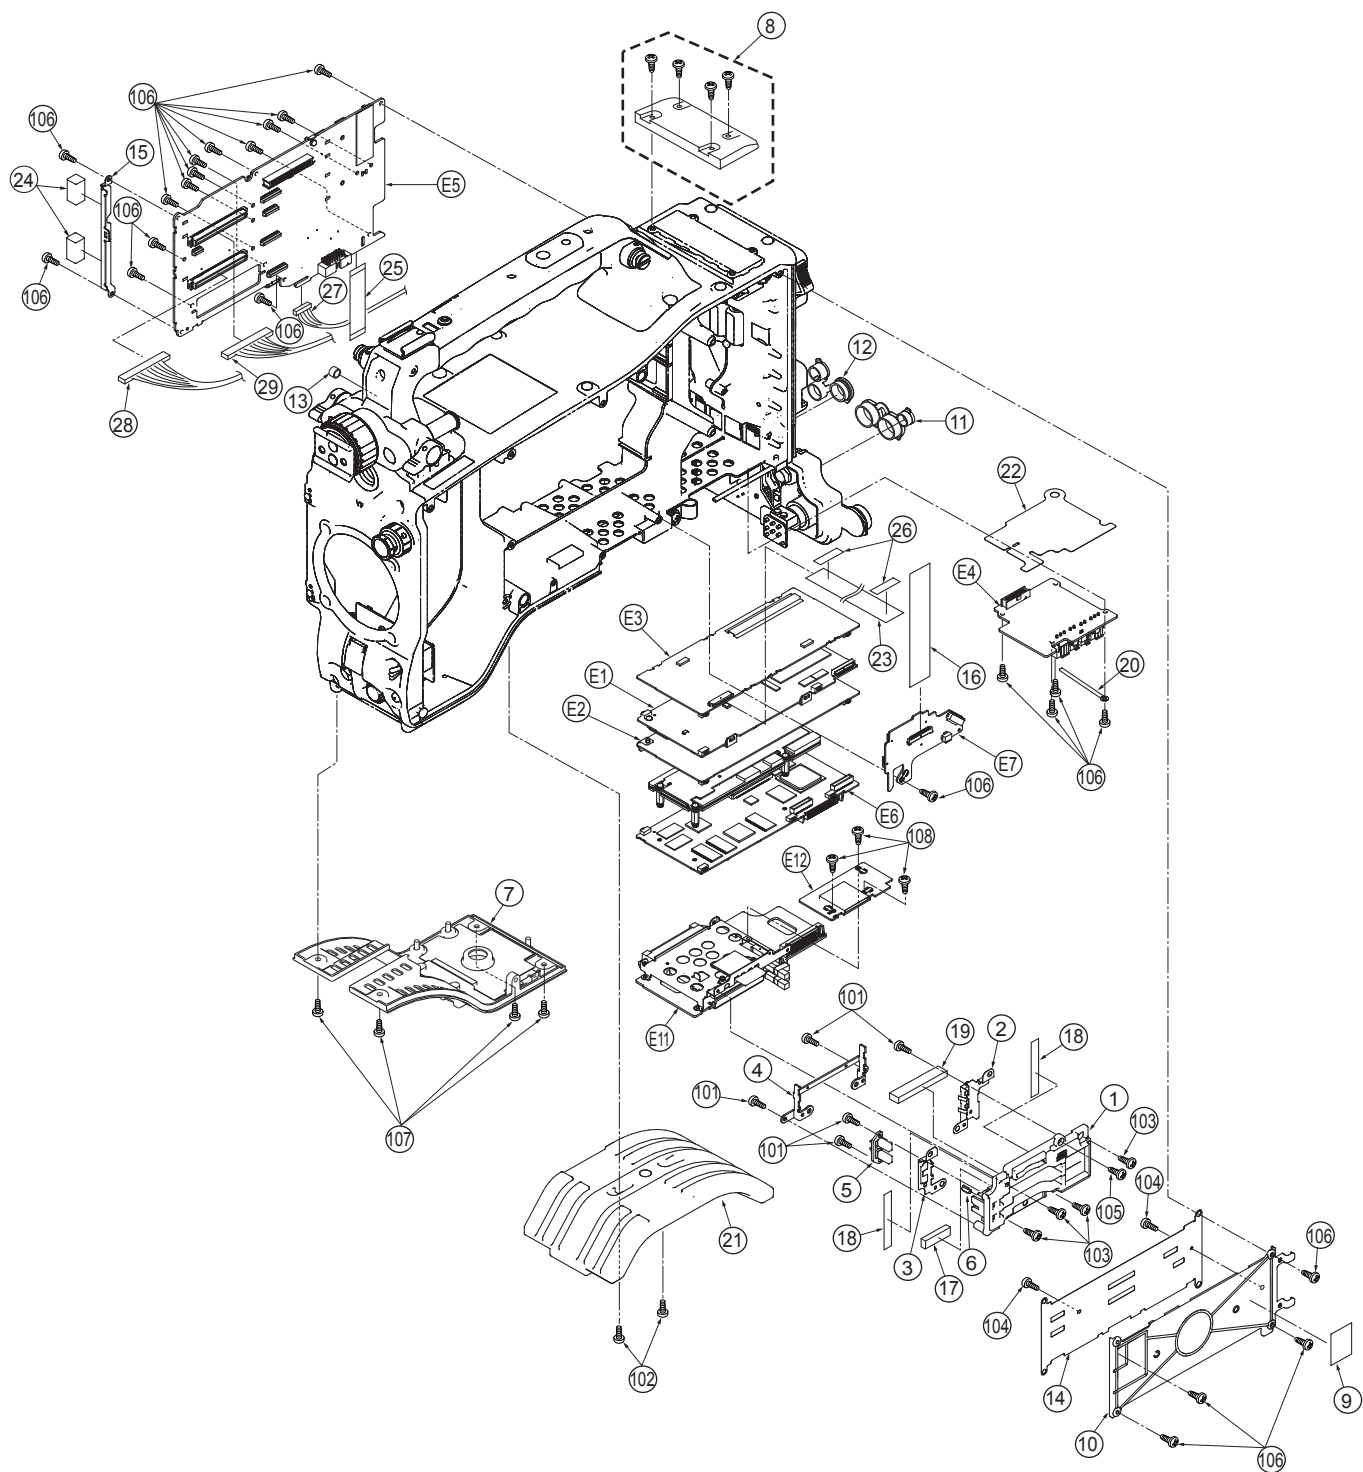

FRAME PARTS ASSEMBLY


[illegible]

This exploded view diagram illustrates the assembly of a washing machine drum. The central component is the drum (10), which is surrounded by various parts including the drum support rollers (11, 12, 13, 14, 15, 16, 17, 18), the drum seal (19), the drum flange (20), and the drum pulley (21). The drum is mounted on a frame (22) which includes the drum support rollers (23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48). The diagram also shows the drum motor (E8), the drum motor pulley (E9), the drum motor bracket (E10), and the drum motor housing (E11). The drum is shown in its assembled position, with the drum seal (19) and drum flange (20) visible. The drum support rollers (11, 12, 13, 14, 15, 16, 17, 18) are shown in their assembled positions. The drum motor (E8) is shown in its assembled position. The drum motor pulley (E9) is shown in its assembled position. The drum motor bracket (E10) is shown in its assembled position. The drum motor housing (E11) is shown in its assembled position. The diagram includes numerous numbered callouts (1-48, E8-E10, 101-109) and dashed lines indicating the assembly paths for each component.

CAMERA PARTS ASSEMBLY

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
2	VYK4K25	FRONT 1U	1						
3	VGM2322	FRONT CASE	1						
4	VJF1256	CABLE CLAMPER	2						
5	VMG0948	EVF TERMINAL WATERPROOF RUB	1						
6	VMC1210	FRONT DOOR PLATE SPRING	1						
7	VMP4850	FRONT DOOR MOUNT ANGLE	1						
8	VMS4088	SOFT BRAKE PIN	1						
9	VKF2485	FRONT DOOR	1						
10	VMG1982	SHIELDING TUBE	1						
11	VMC2091	FINGER ANGLE	1						
12	VXU1620	RUBBER BUTTON U(VGU8346 VMX	1						
13	VGU8346	RUBBER BUTTON	1						
14	VMX3299	RUBBER BUTTON SPACER	1						
15	VMG1317	MENU WATERPROOF RUBBER	1						
16	VGU9299	MENU BUTTON	1						
17	VMX3299	RUBBER BUTTON SPACER	1						
18	VGQ7131	RUBBER BUTTON HOLD TABLE	1						
19	VGU9861	MENU KNOB	1						
20	VMT1432	WATERPROOF SPONGE	2						
21	VMG1140	TOGGLE SW WATERPROOF RUBBER	2						
22	VMX1312	SLIDER WASHER	2						
23	VEE1E64	FRONT JOG CABLE	1						
24	VEE1E85	FRONT GND CABLE	4						
25	XXEV2W4FP	HEX SCREW	2						
26	VYQ5858	OPTICAL U	1						
27	VMP8967	OPTICAL BLOCK ANGLE	1						
28	VMT2153	SHEELD CUSHION	3						
29	VSC6318	SHIELD CASE	1						
30	VSC6262	SHIELD CASE	1						
31	VSC6263	SHIELD CASE	1						
32	VGU0B21	FILTER KNOB (ND)	1						
33	VDB1759	FILTER KNOB BOSS (ND)	1						
34	VGU0B22	FILTER KNOB (CC)	1						
35	VDB1760	FILTER KNOB BOSS (CC)	1						
36	VMT1879	SHIELD CASE CUSION	1						
37	VEE1E85	FRONT GND CABLE	1						
38	VEE1E86	FILTER CABLE	1						
39	VWJ14G8065L0	FRONT-PULSE FFC	1						
40	VWJ10G8037L1	SENSOR FFC	1						
41	VMT2138	SHIELD FOAM	3						
42	VMT2139	SHIELD FOAM	1						
43	VMT2148	ND EARTH SHEET 1	2						
44	VMT2149	ND EARTH SHEET 2	1						
45	JOKD00000114	FERRITE CORE	1						
46	XXE26W3FP	HEX SCREW	4						
47	VKF4294	MOUNT CAP	1						
48	VDW1228	LENS MOUNT RING	1						
101	XSB2+4FJK	SCREW	2						
102	XYN2+C4FJ	SCREW	3						
103	XYN2+J6FJ	SCREW	6						
104	XYN26+J6FJ	SCREW	4						
105	XQN2+B25FJ	SCREW	2						
106	VHD1950	OPTICAL U MOUNT SCREW	4						
107	XYN3+J6FJ	SCREW	1						
108	XYN26+J5FJ	SCREW	24						
109	XSB3+8FJK	SCREW	4						
E8	VEP23695A	DRIVE P.C. BOARD	1						
E9	VEP23696A	PULSE AD P.C. BOARD	1						
E10	VEP23697A	PRE AMP P.C. BOARD	1						
E21	VEP20								


SIDE CASE (R) PARTS ASSEMBLY

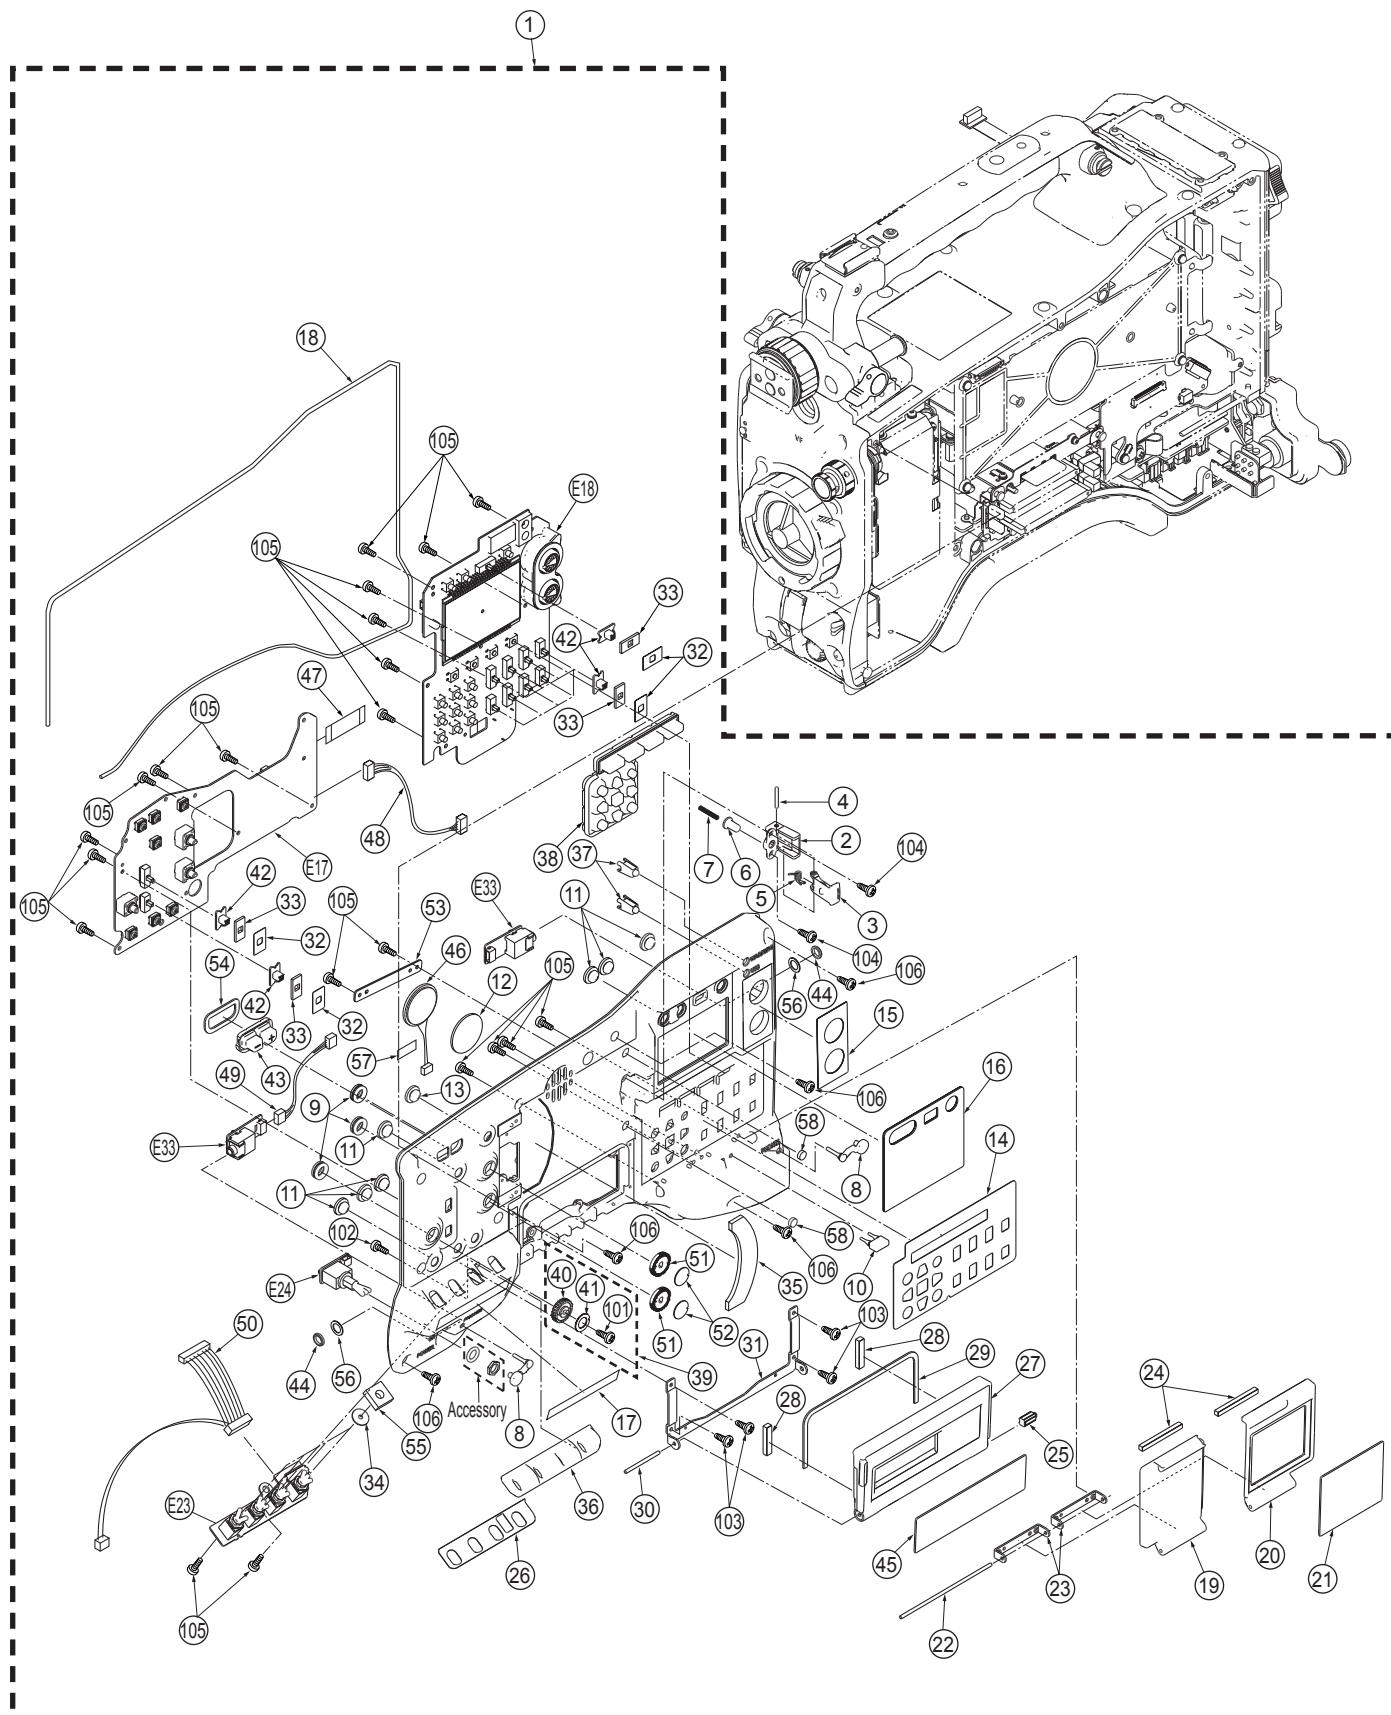

SIDE CASE (R) PARTS ASSEMBLY

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VYP9320	R SIDE S1 U	1						
2	VGO0028	LCD LOCK BASE	1						
3	VGU0H00	LCD LOCK LEVER	1						
4	VMS8120	LCD LOCK SHAFT	1						
5	VMB4421	LCD LOCK SPRING	1						
6	VGO8202	MONITOR POP UP	1						
7	VMB3996	POP UP SPRING	1						
8	VMG1638	PHONE JACK COVER	2						
9	VMG1096	VR WATERPROOF PACKING	3						
10	VMG1506	DOOR CUSHION	1						
11	VGU9695	RUBBER BUTTON (B)	7						
12	VKN0185	SPEAKER NET	1						
13	VGU0B46	MENU BUTTON	1						
14	VGH5210	CONTROL PANEL	1						
15	VGH5206	REAR AUDIO VOL NAME PLATE	1						
16	VKW3470	TC WINDOW	1						
17	VGH5207	TOGGLE PLATE	1						
18	VMG0832	SHIELD TUBE	1						
19	VKW3458	CONTROL DOOR (A)	1						
20	VKW3459	CONTROL DOOR (B)	1						
21	VKW3419	CONTROL DOOR WINDOW	1						
22	VMS7521	SHAFT B	1						
23	VMP8096	DOOR STAND ANGLE	2						
24	VMD6381	DOOR MAGNET	2						
25	VYQ3999	HINGE UNIT	1						
26	VMZ3886	TOGGLE TAPE	1						
27	VYF3392	P2 DOOR U	1						
28	VMD6077	P2 DOOR MAGNET	2						
29	VMT1961	P2 DOOR CUSHION	1						
30	VMS7987	P2 DOOR SHAFT	1						
31	VMP9346	P2 DOOR FRAME	1						
32	VGH5143	SLIDE SW COVER SHEET	11						
33	VMT1884	SLIDE KNOB SPONGE	11						
34	VMG0646	FRONT TOGGLE SW WATERPROOF	4						
35	VGH5215	PROTECT SHEET	1						
36	VGK3666	TOGGLE SWITCH PLATE	1						
37	VGL1228	LED PANEL LIGHT	2						
38	VGU0D67	OPERATION BUTTON R	1						
39	VXU1687	AUDIO VOLUME U	1						
40	VGU9301	VR KNOB FRONT	1						
41	VGH4948	VR NAME PLATE	1						
42	VGU7688	SLIDE SWITCH COVER (B)	11						
43	VGU9658	SHUTTER BUTTON (+/-)	1						
44	VHN0382	NUT	2						
45	VKW3407	CARD DOOR WINDOW	1						
46	VEK0N93	SPEAKER U	1						
47	VWJ2467035L0	FFC	1						
48	VEE1E77	REAR HEAD PHONE CABLE	1						
49	VEE1F29	HEAD PHONE CABLE	1						
50	VEE1J48	TOGGLE/POWER SW-R SIDE1 CAB	1						
51	VGU9303	VR KNOB	2						
52	VGH4680	VR NAME PLATE	2						
53	VMP9793	SP HOLD FRAME	1						
54	VMT2077	SHUTTER BASE	1						
55	VMT2112	WATERPROOF PAD TOGGLE	4						
56	VMX0531	CLUCH SPACER	2						
57	VMF0585	TAPE	1						
58	VMG1804	LCD RUBBER	2						
101	XQN2+A2FJK	SCREW	1						
102	XTB3+8GFJK	SCREW	1						
103	XSB2+6FJK	SCREW	4						
104	XQN2+B6FJK	SCREW	2						
105	XYN2+J6FJ	SCREW	21						
106	XSB3+8FJK	SCREW	5						
E17	VEP80E90A	R SIDE 1 P. C. BOARD	1						
E18	VEP80E91A	R SIDE 2 P. C. BOARD	1						
E23	VEP20D10A	TOGGLE SW P. C. BOARD	1						
E24	VEP20D11A	POWER SW P. C. BOARD	1						
E33	VEP80F01A	PHONE CN P. C. BOARD	2						


SIDE CASE (L) PARTS ASSEMBLY

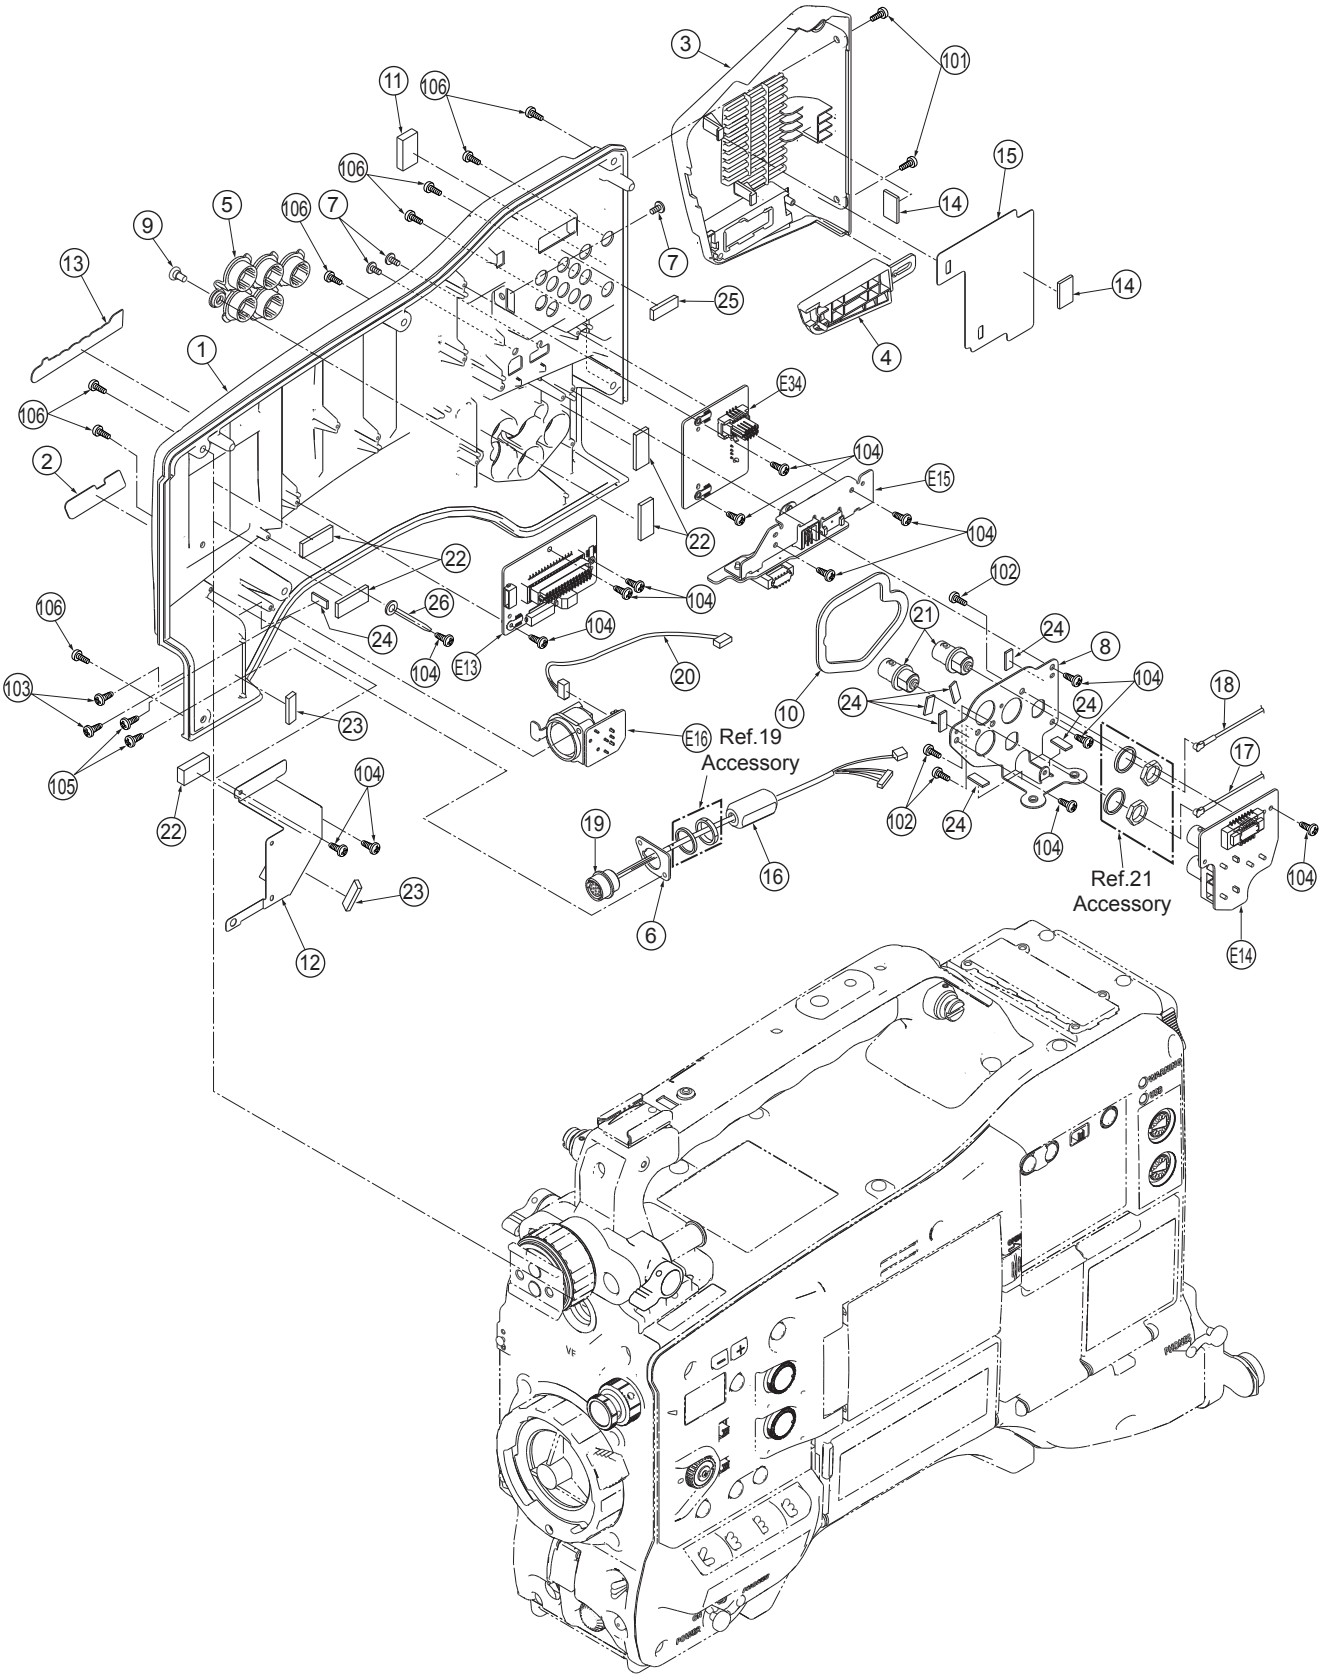

SIDE CASE (L) PARTS ASSEMBLY

[illegible]

LCD PARTS ASSEMBLY

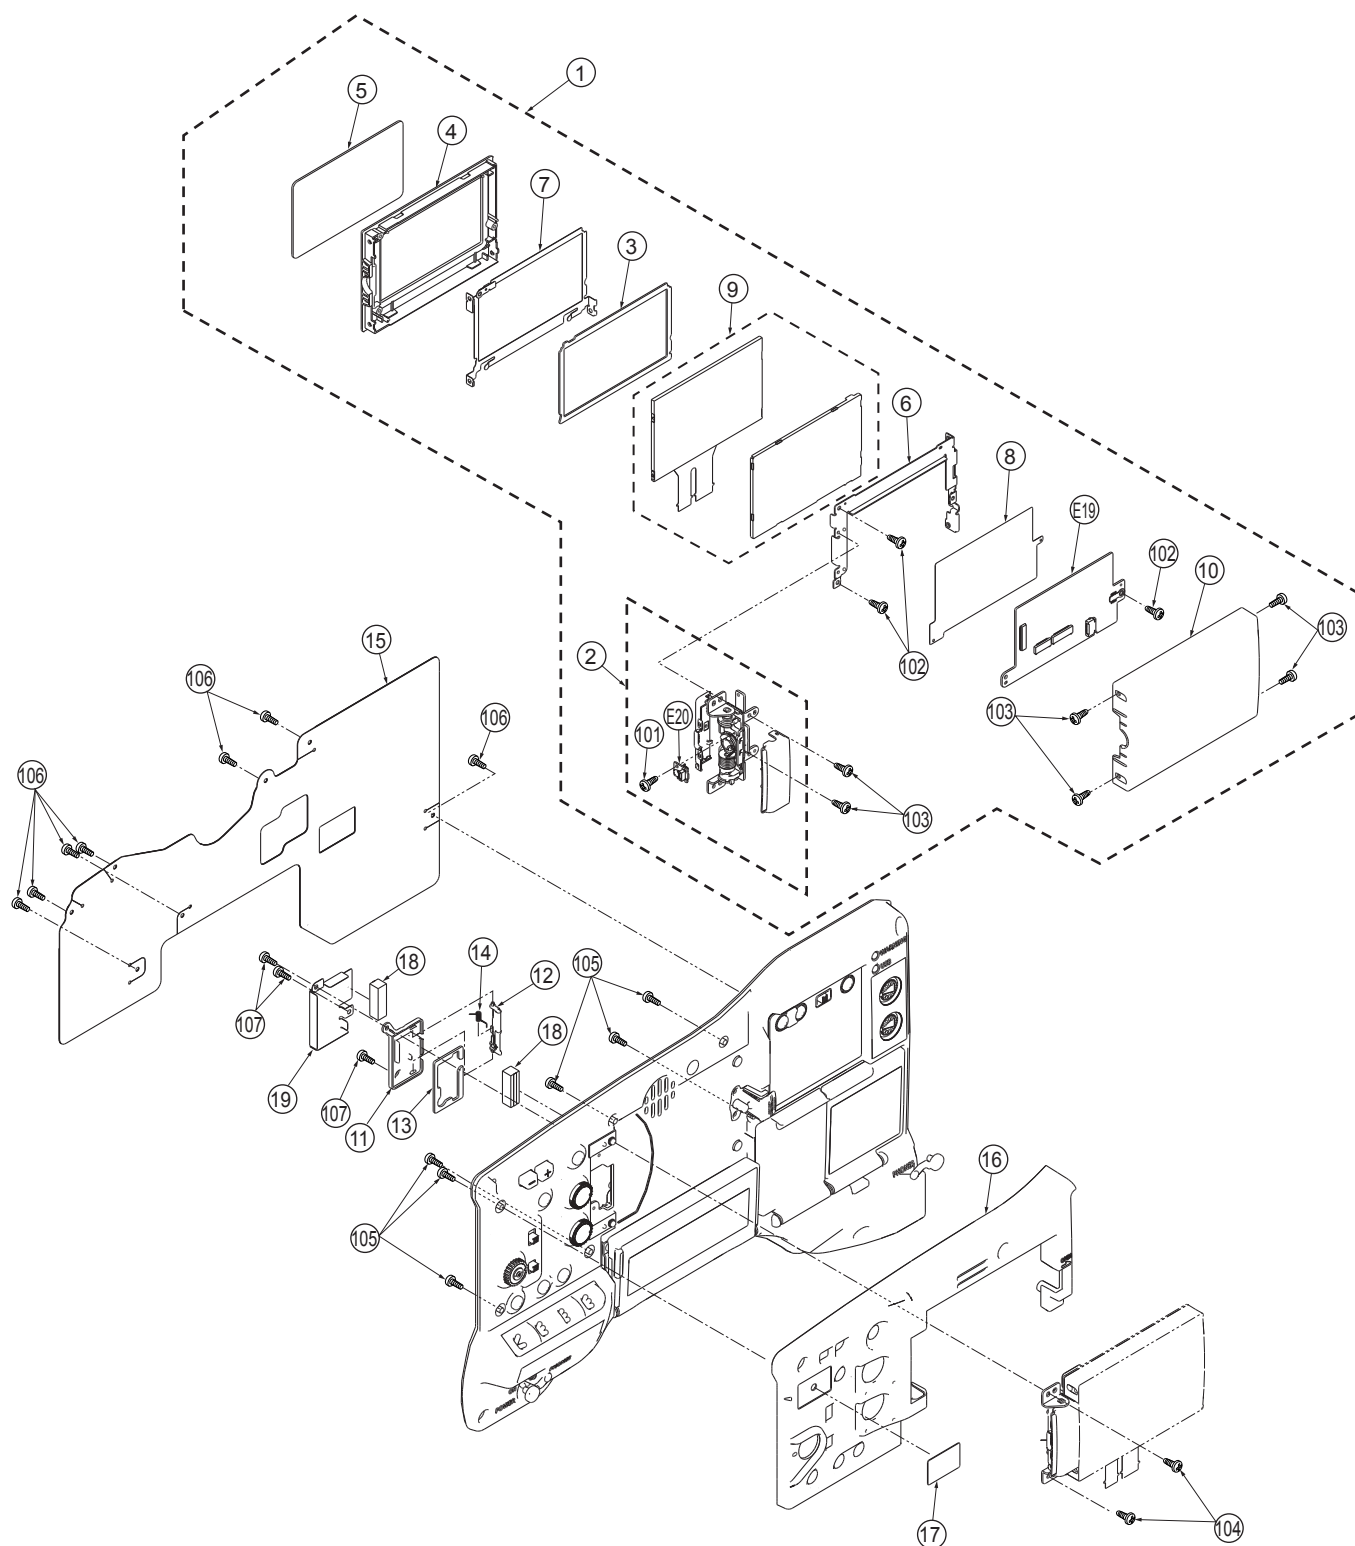


LCD PARTS ASSEMBLY

[illegible]

HANDLE PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

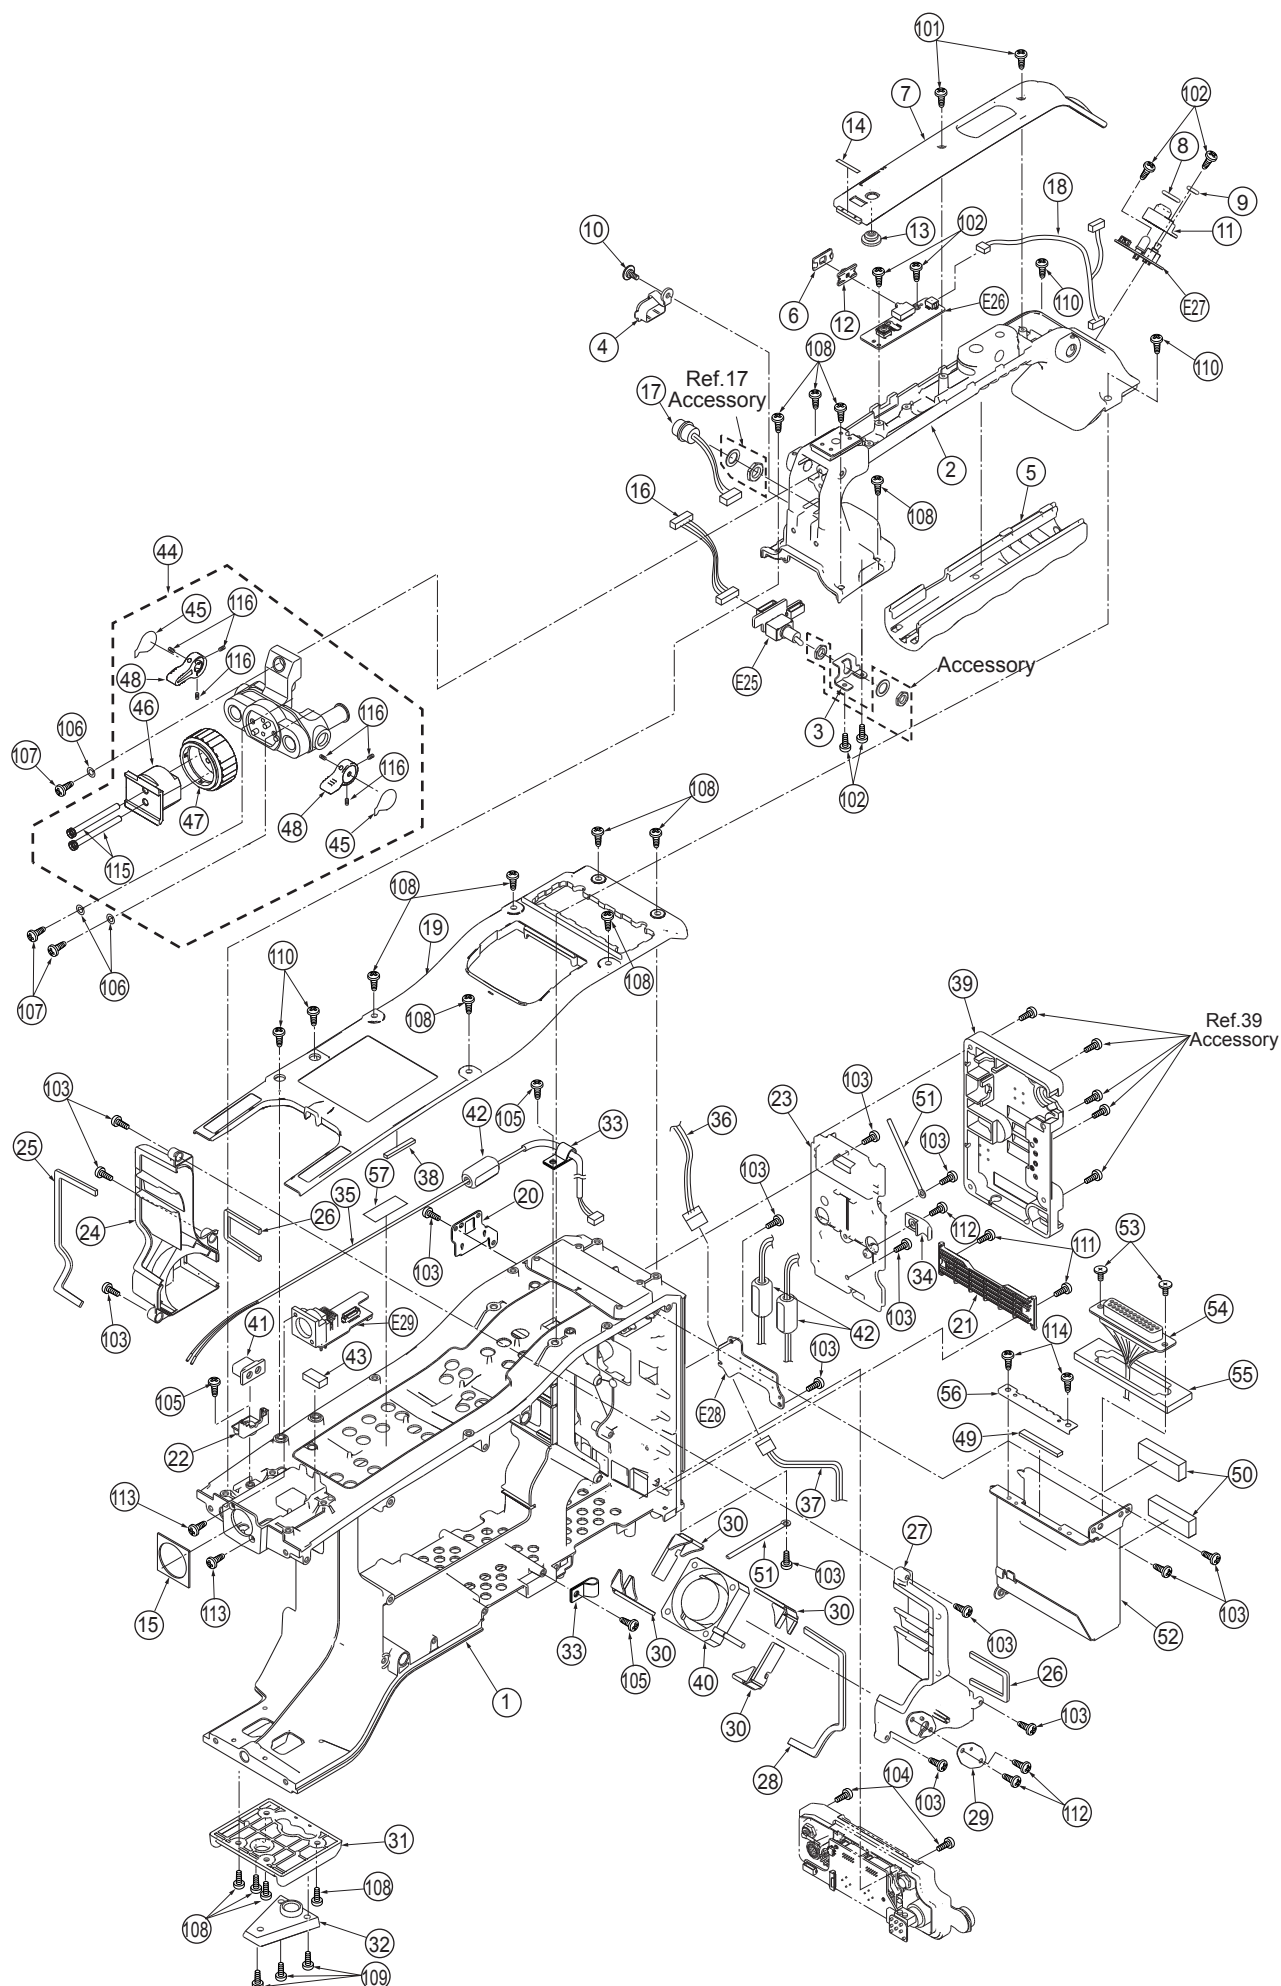


HANDLE PARTS ASSEMBLY

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	VGM2319	MAIN FRAME	1	
2	VYH0391	HANDLE 1 U	1	
3	VMP9798	HANDLE TOGGLE BRACKET	1	
4	VMG1950	CONNECTOR CAP	1	
5	VMG1851	HANDLE RUBBER	1	
6	VMG1460	SLIDE SW RUBBER COVER	1	
7	VKF4748	HANDLE COVER	1	
8	VMT2110	TALLY SHEET	1	
9	VMT2111	TOGGLE SHEET	1	
10	VHD2273	SCREW	1	
11	VGL1113	TALLY COVER	1	
12	VGU9214	SLIDE KNOB	1	
13	VGU9695	RUBBER BUTTON (B)	1	
14	VMT2126	MUTE CUSHION	1	
15	VMZ3896	EVF RUBBER SPACER	1	
16	VEE1J37	MONITOR OUT CABLE	1	
17	VEE1J55	VF IF-LIGHT SW CABLE	1	
18	VEE1F31	HANDLE CABLE	1	
19	VKF4743	TOP COVER	1	
20	VMP9794	MAIN PCB PLATE	1	
21	VKF4843	DUCT COVER	1	
22	VKF4746	HOLDER ANTON	1	
23	VKF4739	BATT IF COVER	1	
24	VKF4741	FAN DUCT L	1	
25	VMT2081	DUCT L SHEET	1	
26	VMT2082	DUCT SHEET	2	
27	VKF4742	FAN DUCT R	1	
28	VMT2083	DUCT R SHEET	1	
29	VMZ3872	FAN CABLE COVER	1	
30	VMG1765	FAN RUBBER	4	
31	VKA0400	FRONT LEG BASE	1	
32	VGM1826	FRONT V EDGE	1	
33	VJF1580	GROUNDING CLAMP	2	
34	VJF1584	CABLE CLAMPER	1	
35	VEKOR16	ANTON CABLE U	1	
36	VEE1J58	ANTON-MOTHER CABLE	1	
37	VEE1J41	BATTERY IF-POWER SUB CABLE	1	
38	VMT2126	MUTE CUSHION	1	
39	VJF1591	ANTON BRACKET	1	
40	L6FAHBAH0010	FAN MOTOR	1	
41	VMX3862	PT CONNECTOR	1	
42	JOKG000000001	FERRITE CORE	3	
43	VMT2141	SHIELD FORM	1	
44	VYQ6009	SLIDER U	1	
45	VGH4698	VF LOCK NAME PLATE	2	
46	VGM2300	VF BASE	1	
47	VYQ4071	VF RING U	1	
48	VGU9854	SHAFT LOCK KNOB	2	
49	VMT2143	SHIELD FORM	1	
50	VMT2142	SHIELD FORM	2	
51	VJF1535	COATING CLIP	2	
52	VMP9222	RECEIVER BOX	1	
53	VHD2105	STEP SCREW	2	
54	VEE1E62	UNISLOT CABLE	1	
55	VMT1265	CONNECTOR CUSHION	1	
56	VSC5660	WL EARTH ANGLE	1	
57	VZT0984	CHO FAV TAPE	1	
101	XSB2+6FJK	SCREW	2	
102	XYN2+J6FJ	SCREW	6	
103	XYN26+J8FJ	SCREW	15	
104	XSB3+16FJK	SCREW	2	
105	XYN3+F8FJ	SCREW	3	
106	XWA3BFJK	WASHER	3	
107	VHD1793	HEX SCREW	3	
108	XSB3+8FJK	SCREW	14	
109	XSB4+12FJK	SCREW	3	
110	XSB4+8FJK	SCREW	4	
111	XQN2+B4FJK	SCREW	2	
112	XTB26+6GFJK	SCREW	3	
113	XSS2+4FC	SCREW	2	
114	XSB26+6FJ	SCREW	2	

[illegible]

REAR JACK PARTS ASSEMBLY

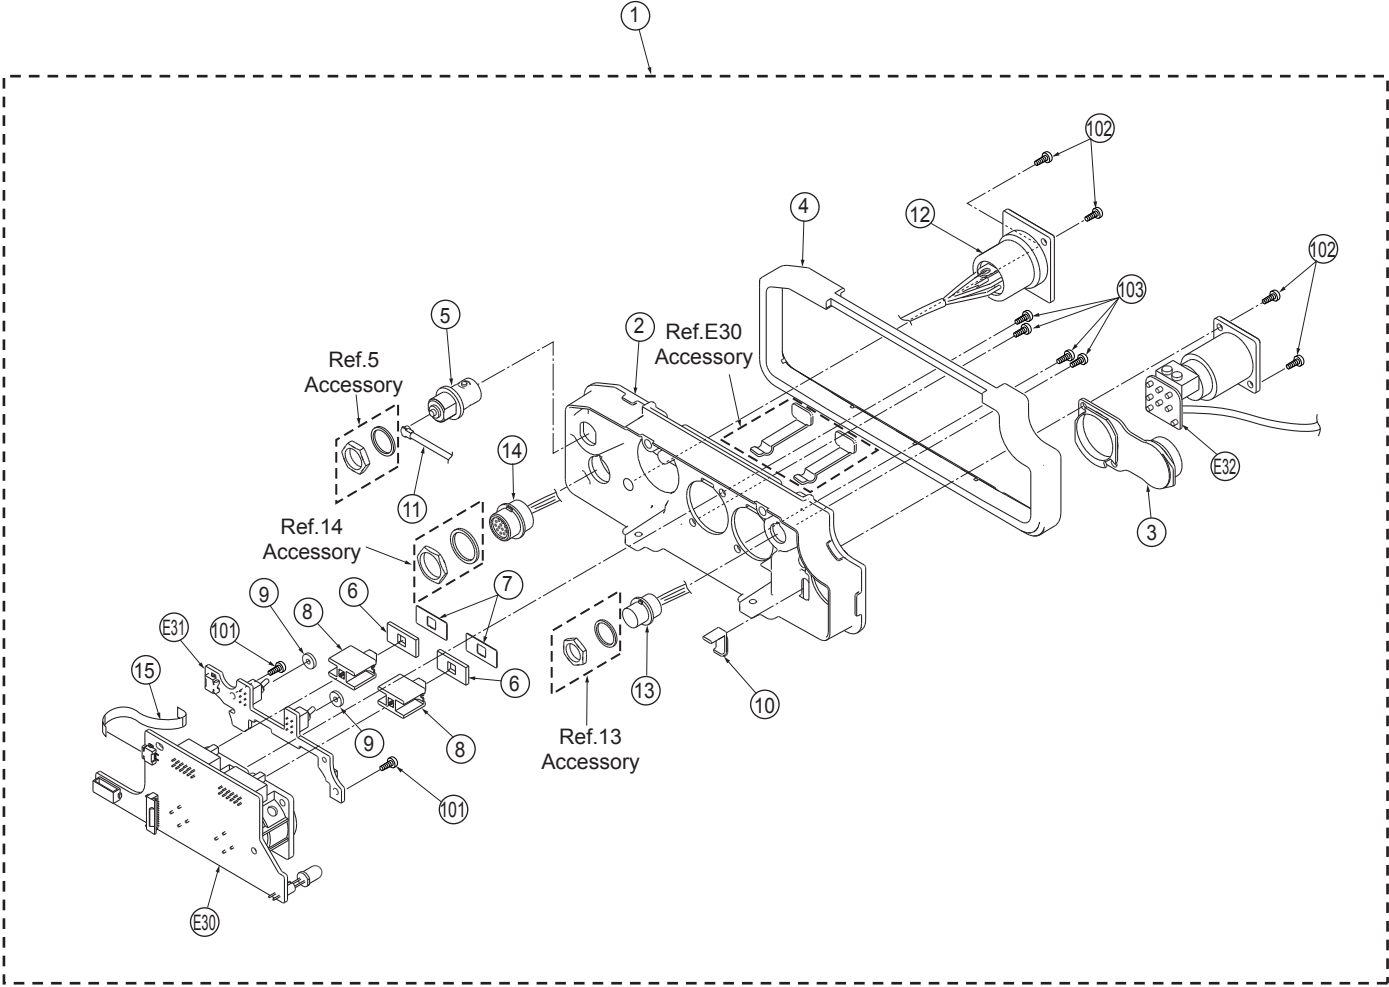


REAR JACK PARTS ASSEMBLY

[illegible]

PACKING PARTS ASSEMBLY

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

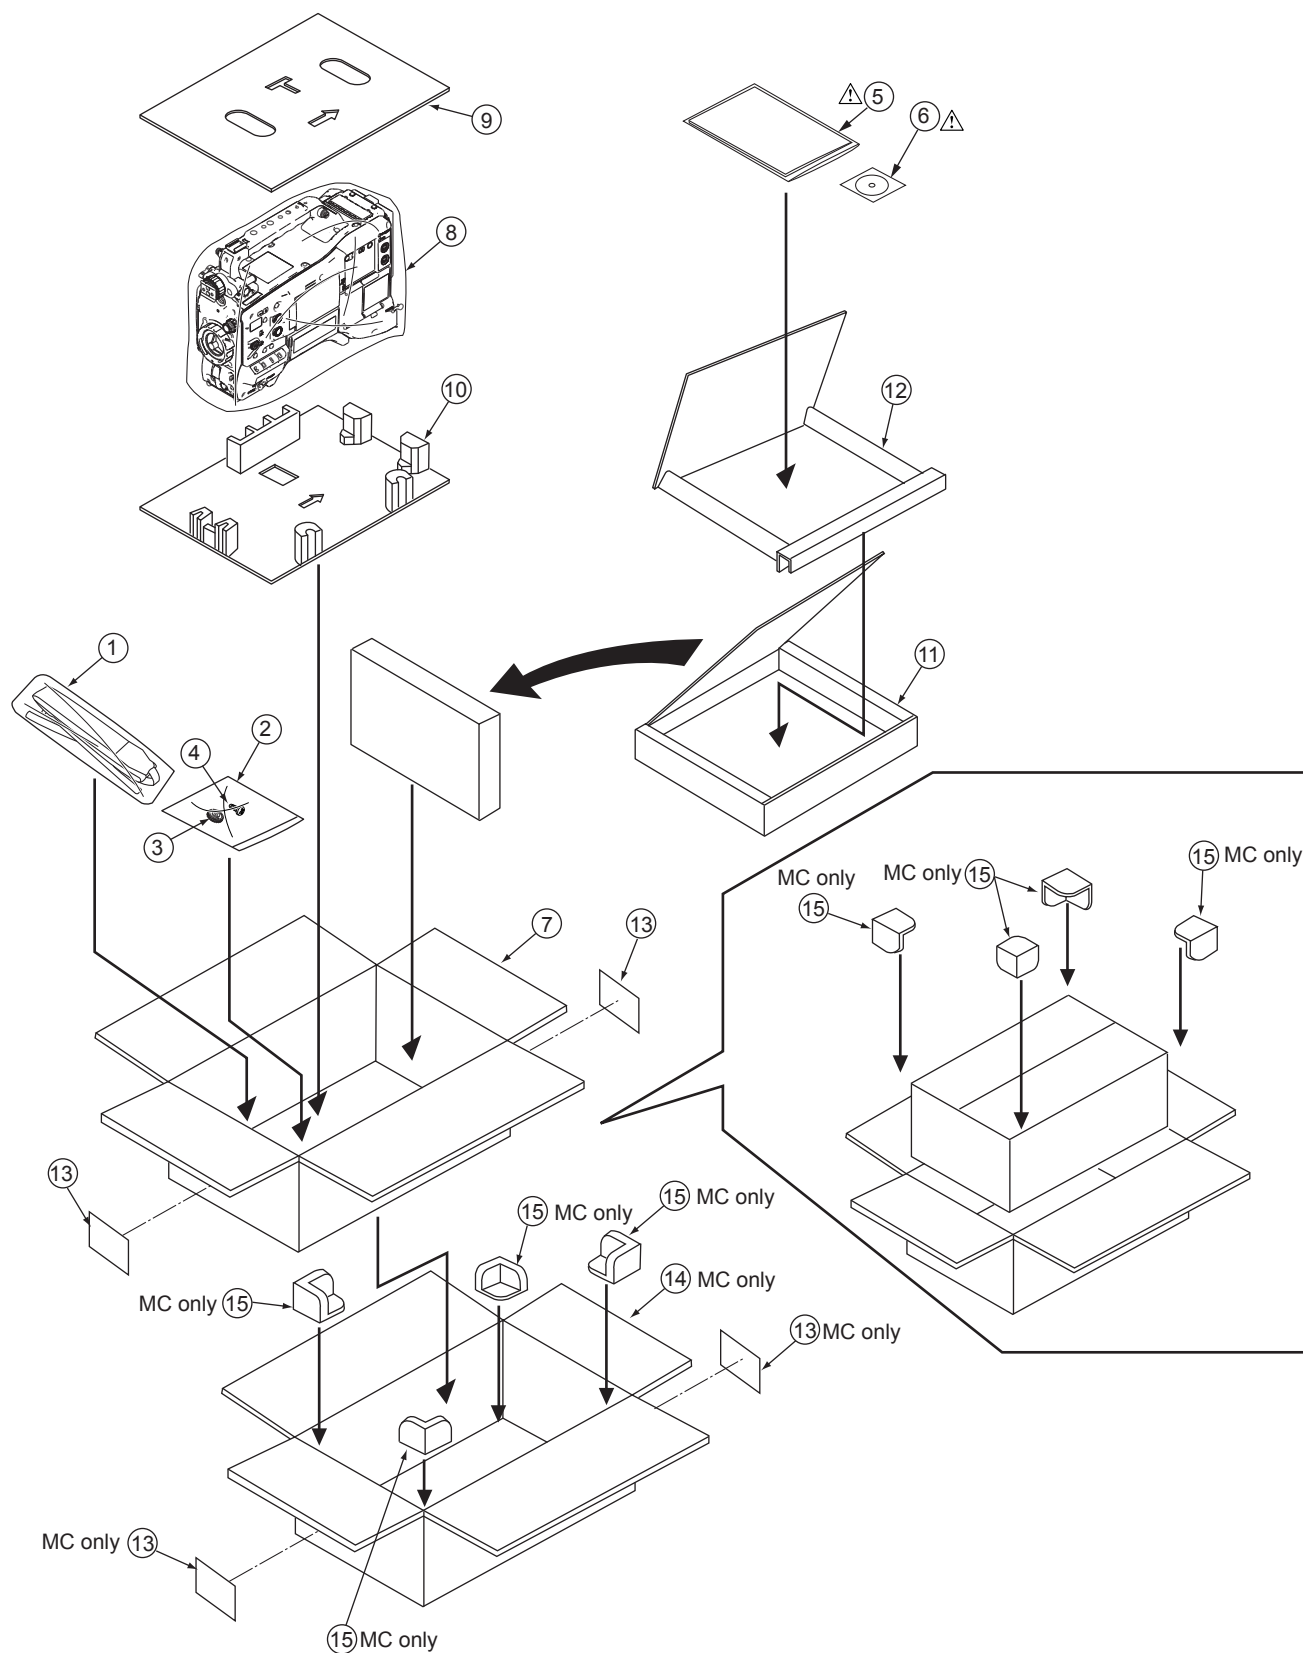

PACKING PARTS ASSEMBLY

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

[illegible][illegible]

ELECTRICAL REPLACEMENT PARTS LIST

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
■ E1	VEP23694A	CAMERA DSP P.C. BOARD	1	(RTL)	■ E1	VEP23694A	CAMDRA DSP P.C. BOARD	1	(RTL)
■ E2	VEP84409A	AUDIO P.C. BOARD	1	(RTL)					
■ E3	VEP81280A	POWER MAIN P.C. BOARD	1	(RTL)	C1, C2	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
■ E4	VEP81281A	POWER SUB P.C. BOARD	1	(RTL)	C101	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
■ E5	VEP80E85A	MOTHER P.C. BOARD	1	(RTL)	C102	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E6	VEP86375A	BACK END P.C. BOARD	1	(RTL)	C103	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
■ E7	VEP80E89A	INT CONNECT P.C. BOARD	1	(RTL)	C104	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E8	VEP23695A	DRIVE P.C. BOARD	1	(RTL)	C105	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
■ E9	VEP23696A	PULSE AD P.C. BOARD	1	(RTL)	C106, 07	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
■ E10	VEP23697A	PRE AMP P.C. BOARD	1	(RTL)	C200	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
■ E11	VEP80E86A	P2 CARD P.C. BOARD	1	(RTL)	C201	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E12	VEP001Y3B	SD CARD P.C. BOARD	1	(RTL)	C202, 03	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
■ E13	VEP80E92A	RELAY P.C. BOARD	1	(RTL)	C204-10	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	7	
■ E14	VEP80E93A	L SIDE JACK P.C. BOARD	1	(RTL)	C211, 12	F1H1A224A012	C. CAPACITOR CH 10V 0.22U	2	
■ E15	VEP80E94A	USB CN 1 P.C. BOARD	1	(RTL)	C213-17	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	5	
■ E16	VEP80E95A	FRONT MIC P.C. BOARD	1	(RTL)	C218	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
■ E17	VEP80E90A	R SIDE 1 P.C. BOARD	1	(RTL)	C219	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E18	VEP80E91A	R SIDE 2 P.C. BOARD	1	(RTL)	C220, 21	F1HOJ2250008	C. CAPACITOR CH6. 3V 2.2U	2	
■ E19	VEP20D02A	MONITOR P.C. BOARD	1	(RTL)	C222	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E20	VEP20D07A	HINGE P.C. BOARD	1	(RTL)	C223	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
■ E21	VEP20D08A	FRONT SW P.C. BOARD	1	(RTL)	C224-29	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	6	
■ E22	VEP20D09A	MENU SW P.C. BOARD	1	(RTL)	C230	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
■ E23	VEP20D10A	TOGGLE SW P.C. BOARD	1	(RTL)	C231-39	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	9	
■ E24	VEP20D11A	POWER SW P.C. BOARD	1	(RTL)	C240	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
■ E25	VEP002E6A	ANTON SW P.C. BOARD	1	(RTL)	C241, 42	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
■ E26	VEP001Z6B	HANDLE SW P.C. BOARD	1	(RTL)	C243, 44	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
■ E27	VEP001Z7B	HANDLE TALLY P.C. BOARD	1	(RTL)	C245	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
■ E28	VEP002E7A	BATTERY IF P.C. BOARD	1	(RTL)	C246	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E29	VEP002E4A	EVF CN P.C. BOARD	1	(RTL)	C248	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
■ E30	VEP84410A	REAR JACK P.C. BOARD	1	(RTL)	C250	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
■ E31	VEP84411A	REAR SW P.C. BOARD	1	(RTL)	C251, 52	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
■ E32	VEP01A20B	DC INPUT P.C. BOARD	1	(RTL)	C253, 54	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
■ E33	VEP80F01A	PHONE CN P.C. BOARD	1	(RTL)	C255, 56	F1L1C106A009	C. CAPACITOR CH 16V 10U	2	
■ E34	VEP80F02A	USB WLAN CN P.C. BOARD	1	(RTL)	C257	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C258	F1L1A2260013	C. CAPACITOR CH 10V 22U	1	
					C259	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
					C260	F1H1H7R0A503	C. CAPACITOR CH 50V 7P	1	
					C261, 62	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C264, 65	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C266	F1G1H181A541	C. CAPACITOR CH 50V 180P	1	
					C267	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C268	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C270-72	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	3	
					C273	F3G1V335A010	T. CAPACITOR CH 35V 3.3U	1	
					C274, 75	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C277	ECHU1C104J	P. CAPACITOR 16V 0.1U	1	
					C278	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C279	F3G1V335A010	T. CAPACITOR CH 35V 3.3U	1	
					C280-83	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4	
					C284	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
					C285	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C288-91	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4	
					C292, 93	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
					C294, 95	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C296, 97	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
					C298	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C300, 01	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C302, 03	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
					C304	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C305	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C306, 07	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C308	F1L1C106A009	C. CAPACITOR CH 16V 10U	1	
					C309	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C310	F1L1C106A009	C. CAPACITOR CH 16V 10U	1	
					C311	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C312	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C313	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C314, 15	F1H1H102A004	C. CAPACITOR CH 50V 1000P	2	
					C316, 17	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C318	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
					C319	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C320	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
					C322, 23	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
					C324, 25	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
					C326-29	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C330	F1H1H390A831	C. CAPACITOR CH 50V 39P	1		C683	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C331	F1K1A106A007	C. CAPACITOR CH 50V 33P	1		C684	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C332	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		C685	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C333, 34	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C686, 87	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
C335	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		C688	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C337	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C689	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C338	F1H1H390A831	C. CAPACITOR CH 50V 39P	1		C690	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C339	F1K1A106A007	C. CAPACITOR CH 50V 33P	1		C691	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C340	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		C692-97	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	6	
C341, 42	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C698, 99	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
C343	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		C700	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
C345-56	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	12		C701	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C357, 58	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C702	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C400-02	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	3		C703, 04	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
C405	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C705	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C407-10	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4		C706	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C412-18	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	7		C707	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C419	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C708	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C420, 21	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C709	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C422-27	F1G1H101A565	C. CAPACITOR CH 50V 100P	6		C712	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C428	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C713-15	F1G1H101A565	C. CAPACITOR CH 50V 100P	3	
C433, 34	F1G1H8ROA564	C. CAPACITOR CH 50V 8P	2		C716	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C435	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C717-26	F1G1H101A565	C. CAPACITOR CH 50V 100P	10	
C437	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C727-30	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4	
C439	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C731	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
C440	F1HOJ2250008	C. CAPACITOR CH6. 3V 2. 2U	1		C732	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C441	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C733, 34	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
C442, 43	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C735, 36	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
C445-47	F1G1H101A565	C. CAPACITOR CH 50V 100P	3		C737-52	F1G1H101A565	C. CAPACITOR CH 50V 100P	16	
C448, 49	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C753-71	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	19	
C451, 52	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C772, 73	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
C453	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C774, 75	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
C454	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C776	F1G1C1030008	C. CAPACITOR CH 16V 0.01U	1	
C455-57	F1G1H101A565	C. CAPACITOR CH 50V 100P	3		C777-96	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	20	
C458-60	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	3		C797	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C461	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C798, 99	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2	
C462-64	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	3		C800	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C466	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C801	F1HOJ1060006	C. CAPACITOR CH6. 3V 10U	1	
C468	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C802-05	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4	
C469	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C806	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C473	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1		C808	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C474	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C810	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C475	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1		C811	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C476, 77	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C812-16	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	5	
C479	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1		C817	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
C481-91	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	11		C818-22	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	5	
C492	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C823, 24	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
C493	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C825	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C494, 95	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C826	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C501-03	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	3		C827	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C600, 01	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C830	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C602, 03	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C832	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C604, 05	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C833	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
C606-09	F1L1A4760003	C. CAPACITOR CH 16V 47U	4		C835	F1H1H102A004	C. CAPACITOR CH 50V 1000P	1	
C610, 11	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C837	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
C612, 13	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C838	F1JOJ226A014	C. CAPACITOR CH6. 3V 22U	1	
C614-17	F1G1H101A565	C. CAPACITOR CH 50V 100P	4		C839-49	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	11	
C618, 19	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C850	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
C620, 21	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C851-54	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	4	
C622-25	F1L1A4760003	C. CAPACITOR CH 16V 47U	4		C855	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C626, 27	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C856	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C628, 29	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C857	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C630, 31	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C858	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C632, 33	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		C859-66	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C634	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1		C867	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C635-43	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	9		C868-81	F1G1H101A565	C. CAPACITOR CH 50V 100P	14	
C644-50	F1G1H101A565	C. CAPACITOR CH 50V 100P	7		C882	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C652-67	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	16		C883-86	F1G1H101A565	C. CAPACITOR CH 50V 100P	4	
C668-73	F1G1H101A565	C. CAPACITOR CH 50V 100P	6		C887	F1KOJ1060002	C. CAPACITOR CH6. 3V 10U	1	
C674	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C888-95	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C675	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C896	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C676	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C897	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	
C677	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C898	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C678	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C899	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	
C679, 80	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C900, 01	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
C681	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		C902	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1	
C682	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C903	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C904	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		IC213	COABBB000196	IC	1	
C905	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1		IC214	COCBCBC00048	IC	1	
C908	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		IC215	COJBAZ002262	IC	1	
C909	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		IC301	COCBADC00042	IC	1	
C910	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		IC302	COCBDB000004	IC	1	
C911	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	1		IC303	COFBBG000057	IC	1	
C912	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		IC304, 05	COABBA000025	IC	2	
C913, 14	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		IC401	C3ZBH0000028	IC	1	
C915	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		IC402	COJBAZ001825	IC	1	
C916-26	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	11		IC403	C3BBKG000106	IC	1	
C928, 29	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		IC405, 06	COJBAZ002468	IC	2	
C931-38	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	8		IC408	COCBCBC00053	IC	1	
C939-48	F1G1H101A565	C. CAPACITOR CH 50V 100P	10		IC600	MNZSFD0RSA1	IC	1	
C950, 51	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		IC603, 04	C3ABSJ000009	IC	2	
C1063, 64	F1G1C104A077	C. CAPACITOR CH 16V 0.1U	2		IC605	C1AB00002262	IC	1	
C1065	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		IC606	COJBAD000207	IC	1	
					IC608	COCBCBC00053	IC	1	
CN101	K1MR70B00004	CONNECTOR	1		IC609	C1ZBZ0004281	IC	1	
CN103	K1KYG0B00001	CONNECTOR	1		IC610	C1ZBZ0003000	IC	1	
CN3301	K1KA70BA0028	CONNECTOR (FEMALE)	1		IC611	COCBCBC00048	IC	1	
					IC612	COJBAZ002192	IC	1	
D102, 03	D4ED1270A008	VARISTOR	2		IC700-03	C1CB00003196	IC	4	
D201	MA3J7420GL	DIODE	1		IC705	C1CB00003196	IC	1	
D202	DA2S10100L	DIODE	1		IC706	COCBCAC00061	IC	1	
D203, 04	DA3S101F0L	DIODE	2		IC707	COJBAZ002192	IC	1	
D205, 06	DA2S10100L	DIODE	2		IC800	C1ZBZ0001834	IC	1	
D300	MA3J7420GL	DIODE	1		IC801	COJBAA000345	IC	1	
D402	DA3J101F0L	DIODE	1		IC803	CODBFYY00222	IC	1	
D800	DZ2J051M0L	DIODE	1		IC805	CODBAFH00039	IC	1	
D801, 02	DZ2J056M0L	DIODE	2		IC806	COEBF0000264	IC	1	
D806-09	DA3S101F0L	DIODE	4		IC807	COEBA0000027	IC	1	
D811	DA3S101F0L	DIODE	1		IC809	COEBD0000224	IC	1	
D812	BOJCP0000008	DIODE	1		IC810	COEBC0000156	IC	1	
D814	DA3S101F0L	DIODE	1		IC812, 13	C1CB00003196	IC	2	
					IC814	C1CB00002542	IC	1	
IC65, 66	COABHA000020	IC	2		IC815-17	COJBAZ001825	IC	3	
IC67, 68	COJBAZ002262	IC	2		IC818	COFBAG000067	IC	1	
IC70	COJBAA000381	IC	1		IC819	COCBCDC00008	IC	1	
IC81	COABHZ000004	IC	1		IC901	COJBAA000014	IC	1	
IC82, 83	COJBAC000342	IC	2		IC1059	COJBAZ001825	IC	1	
IC85	COJBAZ002328	IC	1		IC1060	C1CB00003196	IC	1	
IC87	COJBAA000362	IC	1		IC1061	C1CB00002542	IC	1	
IC88	COCBCBC00053	IC	1		IC1068	COJBAA000146	IC	1	
IC89	COJBAZ001825	IC	1						
IC93	COJBAA000345	IC	1		IP407	VEF0137A	IC	1	
IC94	TVHC126FT	IC	1						
IC95	COJBAE000332	IC	1		L100	JOJBC0000019	FILTER	1	
IC101	COJBAB000660	IC	1		L200	JOJHC0000032	FILTER	1	
IC103, 04	COABGA000007	IC	2		L201-04	JOJCC0000405	FERRITE CORE	4	
IC105	COJBAB000621	IC	1		L205	JOJBC0000019	FILTER	1	
IC106-08	COJBAB000686	IC	3		L206, 07	JOJCC0000405	FERRITE CORE	2	
IC109	COJBAZ000851	IC	1		L208	JOJBC0000019	FILTER	1	
IC110	COJBAR000168	IC	1		L210	JOJHC0000032	FILTER	1	
IC111	COJBAA000362	IC	1		L212	JOE3005B0008	LGR FILTER	1	
IC115	COJBAA000146	IC	1		L213-16	JOJCC0000405	FERRITE CORE	4	
IC129	COJBAB000662	IC	1		L217	JOJBC0000019	FILTER	1	
IC130	COABAB000102	IC	1		L218, 19	JOJCC0000405	FERRITE CORE	2	
IC131	COABEB000023	IC	1		L220	JOJHC0000032	FILTER	1	
IC132	COJBAR000423	IC	1		L222	JOJCC0000405	FERRITE CORE	1	
IC133	COABZ000029	IC	1		L224	JOJCC0000405	FERRITE CORE	1	
IC136	COJBAA000345	IC	1		L225	JOJBC0000019	FILTER	1	
IC138	COJBAA000345	IC	1		L301	JOJBC0000019	FILTER	1	
IC149	COJBAB000660	IC	1		L304	JOJBC0000019	FILTER	1	
IC153	GOZBZ0000992	IC	1		L306	JOJBC0000019	FILTER	1	
IC200	COCBCBC00053	IC	1		L308, 09	JOJBC0000019	FILTER	2	
IC201	COCBCBC00048	IC	1		L310	JOJHC0000032	FILTER	1	
IC202	COCBCBC00053	IC	1		L401	JOJHC0000032	FILTER	1	
IC203	COCBADC00042	IC	1		L403	JOJCC0000405	FERRITE CORE	1	
IC204	COCBDB000004	IC	1		L406, 07	JOJBC0000019	FILTER	2	
IC205	CODBZF000020	IC	1		L409-11	JOJBC0000019	FILTER	3	
IC206	C1AB00002726	IC	1		L412-15	JOJCC0000405	FERRITE CORE	4	
IC207	CODBZF000020	IC	1		L416	JOJHC0000032	FILTER	1	
IC208	COCBCBC00053	IC	1		L417	JOJBC0000019	FILTER	1	
IC209	COFBAD000132	IC	1		L608, 09	JOJHC0000032	FILTER	2	
IC210	COJBAM000045	IC	1		L610	JOJDC0000099	FILTER	1	
IC211	COABBB000196	IC	1		L611	JOJKC0000009	FILTER	1	
IC212	COJBAM000045	IC	1		L612	JOJCC0000119	FILTER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L613	JOJCC0000009	FILTER	1		R239	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1	
L614	JOJHC0000032	FILTER	1		R240	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
L615, 16	JOJCC00000405	FERRITE CORE	2		R241	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
L617	JOJHC0000032	FILTER	1		R242	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
L618	JOJCC00000405	FERRITE CORE	1		R244	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
L619, 20	JOJHC0000032	FILTER	2		R246	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
L621-24	JOJCC00000405	FERRITE CORE	4		R247	ERJ2RKD750	M. RESISTOR CH 1/10W 75	1	
L625-27	JOMAB00000225	FILTER	3		R248, 49	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	2	
L629-31	JOMAB00000225	FILTER	3		R250	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
L632, 33	JOJAD00000028	FILTER	2		R251	ERJ2RHD331	M. RESISTOR CH 1/16W 330	1	
L634	JOMAB00000225	FILTER	1		R252	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
L635, 36	JOJAD00000028	FILTER	2		R253	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
L637-39	JOMAB00000225	FILTER	3		R254	ERJ2RHD331	M. RESISTOR CH 1/16W 330	1	
L701	JOJHC0000032	FILTER	1		R255	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
L702	JOJCC00000405	FERRITE CORE	1		R257	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1	
L703	JOJHC0000032	FILTER	1		R258	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
L705	JOJCC00000405	FERRITE CORE	1		R259	ERJ2RHD272	M. RESISTOR CH 1/16W 2.7K	1	
L706, 07	JOJHC0000032	FILTER	2		R260	ERJ2RHD152	M. RESISTOR CH 1/16W 1.5K	1	
L803	JOJCC00000405	FERRITE CORE	1		R261	ERJ2RHD221	M. RESISTOR CH 1/16W 220	1	
L804, 05	G1C1R1MA0077	COIL 1.1UH	2		R262	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
L813-17	JOJCC00000405	FERRITE CORE	5		R264	ERJ2RHD272	M. RESISTOR CH 1/16W 2.7K	1	
L819-24	JOJCC00000405	FERRITE CORE	6		R265, 66	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
L826, 27	JOJCC00000405	FERRITE CORE	2		R268	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
L828, 29	JOJHC0000032	FILTER	2		R269	ERJ2RHD112	M. RESISTOR CH 1/16W 1.1K	1	
L830	JOJCC00000405	FERRITE CORE	1		R270	EXB28VR000	COMBI. R-R	0	1
L901	JOJBC0000019	FILTER	1		R274, 75	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
L1061-66	JOMAB00000225	FILTER	6		R276	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
L1067, 68	JOJCC00000405	FERRITE CORE	2		R277	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	1	
					R278	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q1	DRC9144E0L	TRANSISTOR	1		R279	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
Q200	DRC9144E0L	TRANSISTOR	1		R280	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1	
Q201, 02	DSC5001ROL	TRANSISTOR	2		R281-85	ERJ2RHD751	M. RESISTOR CH 1/16W 750	5	
Q203, 04	DSA560100L	TRANSISTOR	2		R287-89	ERJ2RHD751	M. RESISTOR CH 1/16W 750	3	
Q800	DRC9144E0L	TRANSISTOR	1		R290, 91	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
Q801-03	DSC900100L	TRANSISTOR	3		R292	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
					R298	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R299	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
R101	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R300	EXBN8V22J	COMBI. R-R	22	1
R102	EXB24V220J	COMBI. R-R	22	1	R301-10	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	10	
R103	EXB24V103J	COMBI. R-R	10K	1	R314	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R104, 05	EXBN8V101J	COMBI. R-R	100	2	R315	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R106-11	ERJ2RHD101	M. RESISTOR CH 1/16W 100	6		R316	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R112, 13	EXBN8V101J	COMBI. R-R	100	2	R317	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R115	EXBN8V101J	COMBI. R-R	100	1	R318	ERJ2RHD331	M. RESISTOR CH 1/16W 330	1	
R118	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R322	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R119	ERJ2RHD682	M. RESISTOR CH 1/16W 6.8K	1		R323	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R124	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R324, 25	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R136	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1		R327	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1	
R137	EXB28VR000	COMBI. R-R	0	1	R328	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R138-41	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4		R329	ERJ2RHD562	M. RESISTOR CH 1/16W 5.6K	1	
R142	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R330	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R143-45	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3		R331	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R200, 01	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	2		R332	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R202	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		R333	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R203	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1		R334	ERJ2RHD821	M. RESISTOR CH 1/16W 820	1	
R204	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		R338	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R205, 06	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2		R339	ERJ2RHD822	M. RESISTOR CH 1/16W 8.2K	1	
R207	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R340, 41	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R208, 09	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2		R343	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1	
R210, 11	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	2		R344-47	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	4	
R212, 13	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2		R348	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R214	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R349-51	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	
R215	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R355	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R216, 17	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	2		R356-58	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	3	
R218, 19	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	2		R359	EXBN8V101J	COMBI. R-R	100	1
R220	ERJ2RHD682	M. RESISTOR CH 1/16W 6.8K	1		R360	EXBN8V470J	COMBI. R-R	47	1
R221, 22	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R361-63	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	3	
R223	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R364	EXBN8V22J	COMBI. R-R	22	1
R224	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R365	EXB28VR000	COMBI. R-R	0	1
R226	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R402, 03	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R227	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R404	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
R228-31	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	4		R405, 06	ERJ2RHD823	M. RESISTOR CH 1/16W 82K	2	
R232, 33	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R407	EXBN8V473J	COMBI. R-R	47K	1
R234	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R416	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
R235, 36	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R419, 20	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R237	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R423, 24	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R238	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R426, 27	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R429	EXB24V103J	COMBI. R-R	10K 1		R695	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R430	EXBN8V101J	COMBI. R-R	100 1		R696, 97	EXB24V220J	COMBI. R-R	22 2	
R433	EXBN8V101J	COMBI. R-R	100 1		R698, 99	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R434	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1 1		R700	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
R435	EXBN8V102J	COMBI. R-R	1K 1		R701	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R437	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1 1		R702, 03	EXBN8V473J	COMBI. R-R	47K 2	
R440	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1 1		R704, 05	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R441	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1 1		R706	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R442	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1 1		R707	EXBN8V473J	COMBI. R-R	47K 1	
R445	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1 1		R708, 09	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R450	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1 1		R710	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1	
R451	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1 1		R711, 12	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
R452	ERJ2RHD681	M. RESISTOR CH 2W 680	1 1		R713	EXB24V470J	COMBI. R-R	47 1	
R453	EXBN8V101J	COMBI. R-R	100 1		R714	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1	
R454	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1 1		R715	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R455	EXBN8V101J	COMBI. R-R	100 1		R716	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R457	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1 1		R717-20	EXB24V470J	COMBI. R-R	47 4	
R458	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R721	EXB24V473J	COMBI. R-R	47K 1	
R459	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1 1		R722-25	EXB24V470J	COMBI. R-R	47 4	
R460, 61	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2 2		R726	EXB24V473J	COMBI. R-R	47K 1	
R462	EXBN8V222J	COMBI. R-R	22 1		R727	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R463	EXBN8V100J	COMBI. R-R	10 1		R728	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1	
R464	EXB28VR000	COMBI. R-R	0 1		R729	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
R465	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R730-41	EXB24V470J	COMBI. R-R	47 12	
R467	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R742, 43	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R470-72	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3 3		R746	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R473, 74	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2 2		R754	EXB24V220J	COMBI. R-R	22 1	
R475	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R755	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R477	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1 1		R764	EXBN8V222J	COMBI. R-R	22 1	
R478	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R773-75	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	3	
R479	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1 1		R800, 01	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
R483	EXB24V103J	COMBI. R-R	10K 1		R802	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R484	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1 1		R803	ERJ2RHD433	M. RESISTOR CH 1/16W 43K	1	
R485, 86	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2 2		R804	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
R492	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1 1		R805	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R493	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1 1		R806	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R494	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1 1		R807	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R497	EXB24V473J	COMBI. R-R	47K 1		R808	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R498	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1 1		R810	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R499	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1 1		R811	ERJ2RHD472	M. RESISTOR CH 1/16W 4. 7K	1	
R501-03	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3 3		R812	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R508, 09	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2 2		R814	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1	
R510, 11	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2 2		R815	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R512-15	EXBN8V100J	COMBI. R-R	10 4		R816	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1	
R516, 17	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2 2		R817	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R528	EXB24V220J	COMBI. R-R	22 1		R818	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R529	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R819	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R530	EXBN8V100J	COMBI. R-R	10 1		R820	ERJ2RHD123	M. RESISTOR CH 1/16W 12K	1	
R531	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R821	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R532	EXBN8V100J	COMBI. R-R	10 1		R823	ERJ2RHD123	M. RESISTOR CH 1/16W 12K	1	
R533	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R825-27	ERJ2RHD101	M. RESISTOR CH 1/16W 100	3	
R534	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1 1		R828	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R535	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R829	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R536	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R830	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R537	EXBN8V222J	COMBI. R-R	22 1		R831	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R538	EXBN8V100J	COMBI. R-R	10 1		R832	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R539	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R833	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R540	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1 1		R834	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R541, 42	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	2 2		R835, 36	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R543	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R837, 38	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R544, 45	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2 2		R840	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
R626-29	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	4 4		R841	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R636, 37	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2 2		R842, 43	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	2	
R638	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1 1		R845, 46	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R639	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R847	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R641-44	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	4 4		R848, 49	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R647	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R850	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R652	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1 1		R851	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R653, 54	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2 2		R852-54	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	
R655	EXBN8V100J	COMBI. R-R	10 1		R855	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R656	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1 1		R856	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
R665	EXBN8V222J	COMBI. R-R	22 1		R857	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R667, 68	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2 2		R858	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R674	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1 1		R859	ERJ2RHD123	M. RESISTOR CH 1/16W 12K	1	
R676, 77	EXB24V470J	COMBI. R-R	47 2		R860	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R686	EXB24V470J	COMBI. R-R	47 1		R861	ERJ2RHD512	M. RESISTOR CH 1/16W 5. 1K	1	
R690-94	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	5 5		R862	ERJ2RHD821	M. RESISTOR CH 1/16W 820	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R864	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1093-97	EXBN8V470J	COMBI. R-R	47	5
R865	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1098-01	EXBN8V473J	COMBI. R-R	47K	4
R866	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1102	EXBN8V470J	COMBI. R-R	47	1
R867	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R1103-06	EXBN8V473J	COMBI. R-R	47K	4
R868, 69	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R1107, 08	EXBN8V222J	COMBI. R-R	22	2
R871, 72	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R1109	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R873	EXBN8V222J	COMBI. R-R	22	1	R1110	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R878, 79	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1112	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R890, 91	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1114	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R892, 93	EXB24V220J	COMBI. R-R	22	2	R1115-20	EXBN8V222J	COMBI. R-R	22	6
R894	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1121	EXB24V470J	COMBI. R-R	47	1
R895	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1122	EXB24V473J	COMBI. R-R	47K	1
R896	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1123	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1	
R897	EXB24V102J	COMBI. R-R	1K	1	R1124, 25	EXBN8V103J	COMBI. R-R	10K	2
R898	EXB24V473J	COMBI. R-R	47K	1	R1126	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R899	EXBN8V100J	COMBI. R-R	10	1	R1128	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R900	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1129	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R901, 02	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R1130, 31	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R903, 04	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2						
R905	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		X200	H1D2705B0002	CRYSTAL OSCILLATOR	1	
R906, 07	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		X400	HOJ180500015	CRYSTAL OSCILLATOR	1	
R909-13	ERJ2RHD101	M. RESISTOR CH 1/16W 100	5		X900	H1C2705B0020	CRYSTAL OSCILLATOR	1	
R914-16	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3		X901	H1C7415B0008	CRYSTAL OSCILLATOR	1	
R918	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		X902	H1C7425B0008	CRYSTAL OSCILLATOR	1	
R920-24	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	5						
R927	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		ZA104-07	K4CD01000010	TERMINAL	4	
R928	EXBN8V470J	COMBI. R-R	47	1					
R929	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1				MISCELLANEOUS		
R930	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1						
R931	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1			VMP9795	PCB ANGLE	1	
R932-34	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	3			VGO9609	COOLING SHEET 25 x 25	1	
R935-44	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	10			VMP9833	DSP HEAT SINK	1	
R945	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1			XYN26+J6FJ	SCREW	1	
R946-50	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	5			XYN26+J8FJ	SCREW	1	
R951	EXBN8V470J	COMBI. R-R	47	1					
R952	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1						
R954-59	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6						
R960-62	ERJ2RHD101	M. RESISTOR CH 1/16W 100	3						
R963	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1						
R964	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1						
R965, 66	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		■ E2	VEP84409A	AUDIO P. C. BOARD	1	(RTL)
R967	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1						
R968-71	EXBN8V222J		4						
R972-76	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	5						
R977, 78	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	2		C4101	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R979-82	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	4		C4102, 03	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R983, 84	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2		C4104	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R985	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C4105, 06	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R986-94	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	9		C4107	EEHPIA100R	E. CAPACITOR 10V 10U	1	
R995	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		C4108	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R996-01	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6		C4109, 10	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1002	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1		C4111	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1003	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		C4112, 13	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1004	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		C4114	EEHPIA100R	E. CAPACITOR 10V 10U	1	
R1005	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		C4115	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1006-25	EXBN8V470J	COMBI. R-R	47	20	C4116, 17	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1026-39	EXBN8V222J	COMBI. R-R	22	14	C4118	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1040-46	EXBN8V101J	COMBI. R-R	100	7	C4119, 20	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1047, 48	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2		C4121	EEHPIA100R	E. CAPACITOR 10V 10U	1	
R1049	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		C4122	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1050, 51	EXBN8V101J	COMBI. R-R	100	2	C4123, 24	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1054	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		C4125	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1056-59	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4		C4126, 27	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1061	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		C4128-30	EEHPIA100R	E. CAPACITOR 10V 10U	3	
R1062, 63	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	2		C4131	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1064-66	ERJ2RHD101	M. RESISTOR CH 1/16W 100	3		C4132	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
R1067	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		C4133	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1068	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		C4134, 35	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
R1069	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		C4136	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1070	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		C4137	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
R1071	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		C4138-40	EEHPIA100R	E. CAPACITOR 10V 10U	3	
R1075	EXBN8V473J	COMBI. R-R	47K	1	C4141	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1076, 77	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		C4142	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
R1078, 79	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		C4143	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1080	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1		C4144	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
R1081-90	EXBN8V470J	COMBI. R-R	47	10	C4145	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
R1092	EXBN8V330J	COMBI. R-R	47	1	C4146	EEHPIA100R	E. CAPACITOR 10V 10U	1	
					C4201, 02	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
					C4203-05	F1H1C223A041	C. CAPACITOR CH 16V 0.022U	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C4206-11	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	6		C4525-28	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	4	
C4212-14	F1H1C223A041	C. CAPACITOR CH 16V 0.022U	3		C4529	F1H1H181A792	C. CAPACITOR CH 50V 180P	1	
C4215-20	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	6		C4530	EEHBC100R	E. CAPACITOR 16V 10U	1	
C4221-23	F1H1C223A041	C. CAPACITOR CH 16V 0.022U	3		C4531	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1	
C4224-29	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	6		C4532	F1H1H181A792	C. CAPACITOR CH 50V 180P	1	
C4230-32	F1H1C223A041	C. CAPACITOR CH 16V 0.022U	3		C4533-36	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	4	
C4233-36	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	4		C4537	F1H1H181A792	C. CAPACITOR CH 50V 180P	1	
C4301-04	EEHBP1A100R	E. CAPACITOR 10V 10U	4		C4538	F1H1H100A831	C. CAPACITOR CH 50V 10P	1	
C4305-09	F1K1C106A116	C. CAPACITOR CH 16V 10U	5		C4539, 40	F1K1C106A116	C. CAPACITOR CH 16V 10U	2	
C4310-13	F1L1A4760003	C. CAPACITOR CH 16V 47U	4		C4541	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
C4314	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4542, 43	EEHBC100R	E. CAPACITOR 16V 10U	2	
C4315	F1H1C223A041	C. CAPACITOR CH 16V 0.022U	1		C4544	F1H1H821A831	C. CAPACITOR CH 50V 820P	1	
C4316	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4545, 46	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
C4317	F1H1C223A041	C. CAPACITOR CH 16V 0.022U	1		C4547	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4318	EEHBP1A100R	E. CAPACITOR 10V 10U	1		C4548	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
C4319-22	F1K1C106A116	C. CAPACITOR CH 16V 10U	4		C4549	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4323	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4550	F1L1A4760003	C. CAPACITOR CH 16V 47U	1	
C4324, 25	EEHBP1A100R	E. CAPACITOR 10V 10U	2		C4551	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1	
C4326, 27	F1K1C106A116	C. CAPACITOR CH 16V 10U	2		C4555	F1H1H181A792	C. CAPACITOR CH 50V 180P	1	
C4328	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4557, 58	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
C4329, 30	EEHBP1A100R	E. CAPACITOR 10V 10U	2		C4559	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4331-34	F1K1C106A116	C. CAPACITOR CH 16V 10U	4		C4561	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4335	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4562-65	F1L1A4760003	C. CAPACITOR CH 16V 47U	4	
C4336, 37	EEHBP1A100R	E. CAPACITOR 10V 10U	2		C4566-68	F1L1C2260020	C. CAPACITOR CH 16V 22U	3	
C4338, 39	F1K1C106A116	C. CAPACITOR CH 16V 10U	2		C4570	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1	
C4340	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4571	F1H1H181A792	C. CAPACITOR CH 50V 180P	1	
C4341	EEHBP1A100R	E. CAPACITOR 10V 10U	1		C4573	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1	
C4401	F1H1H181A792	C. CAPACITOR CH 50V 180P	1		C4574, 75	F1H1H181A792	C. CAPACITOR CH 50V 180P	2	
C4402, 03	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4576, 77	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
C4404	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4578	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4405	F3G1A226A012	T. CAPACITOR CH 10V 22U	1		C4601	EEHBP1E4R7	E. CAPACITOR 25V 4.7U	1	
C4406	F1J0J106A013	C. CAPACITOR CH6.3V 10U	1		C4602	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
C4407	EEHBP1A100R	E. CAPACITOR 10V 10U	1		C4603, 04	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
C4408-11	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	4		C4605, 06	F1H1H3300005	C. CAPACITOR CH 50V 33P	2	
C4412	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4607, 08	EEHBC1470P	E. CAPACITOR 16V 47U	2	
C4413	F1H1H181A792	C. CAPACITOR CH 50V 180P	1		C4609	EEHBP1E4R7	E. CAPACITOR 25V 4.7U	1	
C4414, 15	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4610	F1H1H3300005	C. CAPACITOR CH 50V 33P	1	
C4416	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4611, 12	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
C4417	F3G1A226A012	T. CAPACITOR CH 10V 22U	1		C4613, 14	F1H1H3300005	C. CAPACITOR CH 50V 33P	2	
C4418	F1J0J106A013	C. CAPACITOR CH6.3V 10U	1		C4615, 16	EEHBC1470P	E. CAPACITOR 16V 47U	2	
C4419	EEHBP1A100R	E. CAPACITOR 10V 10U	1		C4617-20	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	4	
C4420, 21	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4701-05	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	5	
C4422	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4706-09	F1H1H102A831	C. CAPACITOR CH 50V 1000P	4	
C4423	F1H1H181A792	C. CAPACITOR CH 50V 180P	1		C4710	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4424, 25	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4711	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
C4426	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4712	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4427	F3G1A226A012	T. CAPACITOR CH 10V 22U	1		C4713	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
C4428	F1J0J106A013	C. CAPACITOR CH6.3V 10U	1		C4714	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4429	EEHBP1A100R	E. CAPACITOR 10V 10U	1		C4715	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
C4430-33	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	4		C4716	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4434	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4717	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
C4435	F1H1H181A792	C. CAPACITOR CH 50V 180P	1		C4718	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4436, 37	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4719	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
C4438	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4720	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4439	F3G1A226A012	T. CAPACITOR CH 10V 22U	1		C4721	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
C4440	F1J0J106A013	C. CAPACITOR CH6.3V 10U	1		C4722-29	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	8	
C4441	EEHBP1A100R	E. CAPACITOR 10V 10U	1		C4730-39	F1H1H102A831	C. CAPACITOR CH 50V 1000P	10	
C4442, 43	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4801, 02	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
C4444	F1H1H3300005	C. CAPACITOR CH 50V 33P	1		C4803	F1K1E1060001	C. CAPACITOR CH 25V 10U	1	
C4501, 02	EEHBC100R	E. CAPACITOR 16V 10U	2		C4804, 05	F1H1H471A219	C. CAPACITOR CH 50V 470P	2	
C4503	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4806	F1H1H222A219	C. CAPACITOR CH 50V 2200P	1	
C4504, 05	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4807	F1H1H332A219	C. CAPACITOR CH 50V 3300P	1	
C4506	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4809	F1H1H104A913	C. CAPACITOR CH 50V 0.1U	1	
C4507	F1J1E225A178	C. CAPACITOR CH 25V 2.2U	1		C4810	F1L1E2260006	C. CAPACITOR CH 25V 22U	1	
C4508	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1		C4811	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4509, 10	EEHBC100R	E. CAPACITOR 16V 10U	2		C4812	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
C4511	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4813	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	
C4512, 13	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4814	F1J2A104A023	C. CAPACITOR CH100V 0.1U	1	
C4514	F1K1C106A116	C. CAPACITOR CH 16V 10U	1		C4818, 19	F2A1C331B127	E. CAPACITOR 16V 330U	2	
C4515	F1J1E225A178	C. CAPACITOR CH 25V 2.2U	1		C4820	F2A2A220A300	E. CAPACITOR 100V 22U	1	
C4516, 17	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		C4823	F1K1E1060001	C. CAPACITOR CH 25V 10U	1	
C4518	F1H1H100A831	C. CAPACITOR CH 50V 10P	1						
C4519, 20	F1K1C106A116	C. CAPACITOR CH 16V 10U	2		CN4701	K1KB50BA0015	CONNECTOR (FEMALE)	1	
C4521	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1		CN4702	K1KA30BA0028	CONNECTOR (MALE)	1	
C4522	EEHBC100R	E. CAPACITOR 16V 10U	1						
C4523	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1		D4401-04	DA3J101KOL	DIODE	4	
C4524	F1H1H181A792	C. CAPACITOR CH 50V 180P	1		D4501-04	MA3J7420GL	DIODE	4	

Components identified with the mark  have the special characteristics for safety.
When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
D4505	DA3J102D0L	D1ODE	1		IC4601	COJBAS000075	IC	1	
D4506	DA3J103E0L	D1ODE	1		IC4602	COABBB000032	IC	1	
D4507, 08	DA3J102D0L	D1ODE	2		IC4603	COABBB000179	IC	1	
D4509, 10	DA3J101F0L	D1ODE	2		IC4604	COABBB000284	IC	1	
D4511, 12	DA3J103E0L	D1ODE	2		IC4605	COJBAS000075	IC	1	
D4601, 02	D4ED1220A006	VARISTOR	2		IC4606	COABBB000284	IC	1	
D4603, 04	DA3J102D0L	D1ODE	2		IC4701	TVHT541FT	IC	1	
D4605, 06	D4ED1220A006	VARISTOR	2		IC4702-05	COJBAQ000148	IC	4	
D4701	MA3J7420GL	D1ODE	1		IC4706	COCBADC00042	IC	1	
D4801	DA2J10100L	D1ODE	1		IC4707	COCBDB000004	IC	1	
D4802	BOJCLM000001	D1ODE	1		IC4708	COCBADC00042	IC	1	
D4803	BOECP000004	D1ODE	1		IC4709	COCBCDC00008	IC	1	
D4804, 05	BOHCMM000014	D1ODE	2		IC4710	COCBCYY00021	IC	1	
D4806, 07	DZ2J200M0L	D1ODE	2		IC4711	COCBCBC00053	IC	1	
D4808	DZ2J068M0L	D1ODE	1		IC4801	CODBAZC00010	IC	1	
D4809, 10	DZ2J200M0L	D1ODE	2						
D4811	DZ2J120M0L	D1ODE	1		L4701-04	JOJHC0000032	FILTER	4	
D4812	DZ2J150M0L	D1ODE	1		L4801	JOJBC0000019	FILTER	1	
D4813	DA2J10100L	D1ODE	1		L4802	G1C100MA0291	COIL 10UH	1	
					L4803	JOJKC0000009	FILTER	1	
IC4101	COABBB000032	IC	1						
IC4102	COJBAR000432	IC	1		 PA4801	D4FB1R10A019	POLY SWITCH RESETTABLE	1	
IC4103	COABBB000032	IC	1						
IC4104	COJBAR000432	IC	1		Q4401, 02	DRA9144E0L	TRANSISTOR	2	
IC4105	COABBB000032	IC	1		Q4403, 04	DSC250100L	TRANSISTOR	2	
IC4106	COJBAZ000602	IC	1		Q4405	DSC500100L	TRANSISTOR	1	
IC4107	COABBB000032	IC	1		Q4406	DSC250100L	TRANSISTOR	1	
IC4108	COJBAZ000602	IC	1		Q4407	DRC9144E0L	TRANSISTOR	1	
IC4109	COABBB000032	IC	1		Q4408	DSC500100L	TRANSISTOR	1	
IC4110	COABBB000179	IC	1		Q4409	DRC9144E0L	TRANSISTOR	1	
IC4111	COABBB000032	IC	1		Q4410	DSC500100L	TRANSISTOR	1	
IC4201	COJBAZ000602	IC	1		Q4411, 12	DRA9144E0L	TRANSISTOR	2	
IC4202	COABBB000032	IC	1		Q4413, 14	DSC250100L	TRANSISTOR	2	
IC4203	COJBAR000432	IC	1		Q4415	DSC500100L	TRANSISTOR	1	
IC4204	COJBAZ000602	IC	1		Q4416	DSC250100L	TRANSISTOR	1	
IC4205	COABBB000032	IC	1		Q4417	DRC9144E0L	TRANSISTOR	1	
IC4206	COJBAR000432	IC	1		Q4418	DSC500100L	TRANSISTOR	1	
IC4207	COJBAZ000602	IC	1		Q4419	DRC9144E0L	TRANSISTOR	1	
IC4208	COABBB000032	IC	1		Q4420	DSC500100L	TRANSISTOR	1	
IC4209	COJBAR000432	IC	1		Q4421, 22	DRA9144E0L	TRANSISTOR	2	
IC4210	COJBAZ000602	IC	1		Q4423, 24	DSC250100L	TRANSISTOR	2	
IC4211	COABBB000032	IC	1		Q4425	DSC500100L	TRANSISTOR	1	
IC4212	COJBAR000432	IC	1		Q4426	DSC250100L	TRANSISTOR	1	
IC4301	TVHT541FT	IC	1		Q4427	DRC9144E0L	TRANSISTOR	1	
IC4302	C1AB00003311	IC	1		Q4428	DSC500100L	TRANSISTOR	1	
IC4303	COJBAR000432	IC	1		Q4429	DRC9144E0L	TRANSISTOR	1	
IC4304	COABBB000032	IC	1		Q4430	DSC500100L	TRANSISTOR	1	
IC4305, 06	COJBAR000432	IC	2		Q4431, 32	DRA9144E0L	TRANSISTOR	2	
IC4307	COABBB000032	IC	1		Q4433, 34	DSC250100L	TRANSISTOR	2	
IC4308	COJBAR000432	IC	1		Q4435	DSC500100L	TRANSISTOR	1	
IC4401	COJBAA000393	IC	1		Q4436	DSC250100L	TRANSISTOR	1	
IC4402	COABBB000032	IC	1		Q4437	DRC9144E0L	TRANSISTOR	1	
IC4403	COJBAR000432	IC	1		Q4438	DSC500100L	TRANSISTOR	1	
IC4404	COABBB000032	IC	1		Q4439	DRC9144E0L	TRANSISTOR	1	
IC4405	COJBAA000393	IC	1		Q4440	DSC500100L	TRANSISTOR	1	
IC4406	COABBB000032	IC	1		Q4501	DRA9144E0L	TRANSISTOR	1	
IC4407	COJBAR000432	IC	1		Q4502, 03	DRC9144E0L	TRANSISTOR	2	
IC4408	COJBAA000393	IC	1		Q4504, 05	DSC250100L	TRANSISTOR	2	
IC4409	COABBB000032	IC	1		Q4506	DRC9144E0L	TRANSISTOR	1	
IC4410	COJBAR000432	IC	1		Q4507-09	DSA5001R0L	TRANSISTOR	3	
IC4411	COABBB000032	IC	1		Q4601-06	DSC250100L	TRANSISTOR	6	
IC4412	COJBAA000393	IC	1		Q4701, 02	DRC9144E0L	TRANSISTOR	2	
IC4413	COABBB000032	IC	1		Q4801	DRC9144E0L	TRANSISTOR	1	
IC4414	COJBAR000432	IC	1		Q4802	DRA9144E0L	TRANSISTOR	1	
IC4501, 02	COFBAK000020	IC	2		Q4803	DRC9144E0L	TRANSISTOR	1	
IC4503	COJBAZ001121	IC	1		Q4804	DMA204010R	TRANSISTOR	1	
IC4504	COFBBK000038	IC	1		Q4805	DSC900100L	TRANSISTOR	1	
IC4505	COABBB000032	IC	1		Q4806	DSA900100L	TRANSISTOR	1	
IC4506	COJBAR000432	IC	1		Q4807	DSC900100L	TRANSISTOR	1	
IC4507	COABBB000032	IC	1		Q4808	DSA900100L	TRANSISTOR	1	
IC4508	COJBAR000432	IC	1		Q4809	B1CFRM000014	TRANSISTOR	1	
IC4509	COFBBK000038	IC	1		Q4810	B1ABBL000006	TRANSISTOR	1	
IC4510	COABBB000179	IC	1		Q4811	DSC900100L	TRANSISTOR	1	
IC4511	C1AB00002729	IC	1		Q4812	DMC204010R	TRANSISTOR	1	
IC4512	COABBB000179	IC	1		Q4813	DRC9144E0L	TRANSISTOR	1	
IC4513	C1BB00000820	IC	1		Q4814	DMC204010R	TRANSISTOR	1	
IC4514	COABBB000179	IC	1		Q4815	DSC900100L	TRANSISTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R4101-04	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	4		R4317	ERJ3RED680	M. RESISTOR CH 1/16W 68	1	
R4105, 06	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R4318	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4107	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4319	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4108	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4320	ERJ3RBD182	M. RESISTOR CH 1/16W 1.8K	1	
R4109	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4321	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4110	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4322	ERJ3RED680	M. RESISTOR CH 1/16W 68	1	
R4111-14	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	4		R4323	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4115, 16	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R4401	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4117	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4402	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4118	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4403	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4119	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4404	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4120	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4405	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4121-24	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	4		R4406	ERJ3RED470	M. RESISTOR CH 1/16W 47	1	
R4125	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4407	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R4126	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4408	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R4127	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4409	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4128	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1		R4410	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
R4129	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1		R4411	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
R4130	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4412, 13	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4131	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4414	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4132	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1		R4415	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R4133	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		R4416	ERJ3GEYJ155	M. RESISTOR CH 1/16W 1.5M	1	
R4134	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4417	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R4135-38	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	4		R4418	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4139	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4420, 21	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4140	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4422	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
R4141	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4423	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R4142	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1		R4424, 25	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4143	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1		R4426	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4144	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4427	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4145	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4428	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4146	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1		R4429	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4147	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		R4430	ERJ3RED470	M. RESISTOR CH 1/16W 47	1	
R4148	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4431	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R4149	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4432	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R4150, 51	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2		R4433	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4152	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1		R4434	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
R4153	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1		R4435	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
R4154-59	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	6		R4436, 37	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4160	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4438	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4161	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4439	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R4162, 63	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2		R4440	ERJ3GEYJ155	M. RESISTOR CH 1/16W 1.5M	1	
R4164	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1		R4441	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R4165	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1		R4442	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4166-71	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	6		R4444, 45	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4172	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4446	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
R4201	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4447	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R4202	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4448, 49	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4203	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1		R4450	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4204	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		R4451	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4205	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4452	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4206	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4453	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4207	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1		R4454	ERJ3RED470	M. RESISTOR CH 1/16W 47	1	
R4208	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		R4455	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R4209	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4456	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R4210	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4457	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4211	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1		R4458	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	
R4212	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		R4459	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
R4213	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4460, 61	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4214	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4462	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4215	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1		R4463	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
R4216	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		R4464	ERJ3GEYJ155	M. RESISTOR CH 1/16W 1.5M	1	
R4301-03	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	3		R4465	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R4304	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4466	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4305	ERJ3RBD182	M. RESISTOR CH 1/16W 1.8K	1		R4468, 69	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4306	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4470	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
R4307	ERJ3RED680	M. RESISTOR CH 1/16W 68	1		R4471	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R4308	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R4472, 73	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R4309	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4474	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4310	ERJ3RBD182	M. RESISTOR CH 1/16W 1.8K	1		R4475	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4311	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4476	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4312	ERJ3RED680	M. RESISTOR CH 1/16W 68	1		R4477	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
R4313	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R4478	ERJ3RED470	M. RESISTOR CH 1/16W 47	1	
R4314	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4479	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R4315	ERJ3RBD182	M. RESISTOR CH 1/16W 1.8K	1		R4480	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R4316	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R4481	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
					R4482	ERJ3RBD122	M. RESISTOR CH 1/16W 1.2K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R4483	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1		R4634	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4484, 85	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R4635-37	ERJ3GEYG472	M. RESISTOR CH 1/16W 4.7K	3	
R4486	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R4638	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1	
R4487	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1		R4640-43	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	4	
R4488	ERJ3GEYJ155	M. RESISTOR CH 1/16W 1.5M	1		R4644, 45	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	2	
R4489	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4646	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1	
R4490	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4647	ERJ14YJ220	M. RESISTOR CH 1/4W 22	1	
R4492, 93	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R4648	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1	
R4494	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1		R4649	ERJ14YJ220	M. RESISTOR CH 1/4W 22	1	
R4495	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1		R4650	ERJ3RED680	M. RESISTOR CH 1/16W 68	1	
R4496	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4651, 52	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2	
R4501, 02	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		R4653, 54	ERJ3GEYG472	M. RESISTOR CH 1/16W 4.7K	2	
R4503, 04	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		R4681	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R4505-07	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3		R4683	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4508	D1H84704A008	COMBI. R-R 47	1		R4684	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4509, 10	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		R4685	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1	
R4511, 12	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2		R4686	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R4513-15	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3		R4687	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1	
R4516	D1H84704A008	COMBI. R-R 47	1		R4688	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R4517-24	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	8		R4689	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R4525	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		R4691	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1	
R4526	D1H84704A008	COMBI. R-R 47	1		R4692	ERJ3GEYJ683	M. RESISTOR CH 1/16W 68K	1	
R4527-29	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3		R4693, 94	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	2	
R4530	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4701-04	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	4	
R4531-35	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	5		R4705, 06	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R4536	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1		R4708-24	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	17	
R4537	ERJ3RBD112	M. RESISTOR CH 1/16W 1.1K	1		R4801	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R4538-42	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	5		R4802	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
R4543	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1		R4803	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4544	ERJ3RBD112	M. RESISTOR CH 1/16W 1.1K	1		R4804	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1	
R4545	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		R4805, 06	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	2	
R4546	D1H84704A008	COMBI. R-R 47	1		R4807	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R4547-49	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	3		R4808, 09	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	2	
R4551	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4810	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R4552, 53	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R4811	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R4554	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R4812	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R4555	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1		R4813	ERJ3RBD512	M. RESISTOR CH 1/16W 5.1K	1	
R4556	ERJ3RBD683	M. RESISTOR CH 1/16W 68K	1		R4814	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
R4557	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4815	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R4558	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R4816	ERJ3GEYJ393	M. RESISTOR CH 1/16W 39K	1	
R4559	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1		R4817	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1	
R4560	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4818	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R4562-64	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	3		R4819	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R4565-67	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3		R4820	ERJL14KJ50M	M. RESISTOR CH 1/4W 5	1	
R4568	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	1		R4821	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R4569-72	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	4		R4822	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R4573	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1		R4823	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R4574	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		R4824	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R4575	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1		R4825	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R4576, 77	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	2		R4826	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R4578	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R4827	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R4579, 80	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2		R4828	ERJ6GEYF472	M. RESISTOR CH 1/10W 4.7K	1	
R4581-88	ERJ6GEYJ101	M. RESISTOR CH 1/10W 100	8		R4829	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	1	
R4601	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1		R4830	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
R4602	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R4831	ERJ6GEYF472	M. RESISTOR CH 1/10W 4.7K	1	
R4603	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1		R4833	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R4604	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1		R4837	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R4605	ERJ3RBD133	M. RESISTOR CH 1/16W 13K	1		R4839	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1	
R4606	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1		R4840	ERJ3GEYJ153	M. RESISTOR CH 1/16W 150K	1	
R4607	ERJ3GEYJ473	M. RESISTOR CH 1/16W 47K	1		R4841	ERJ3RED184	M. RESISTOR CH 1/16W 180K	1	
R4608-10	ERJ3GEYG472	M. RESISTOR CH 1/16W 4.7K	3		R4842	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R4611	ERJ3GEYJ122	M. RESISTOR CH 1/16W 1.2K	1		R4843	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R4613-16	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	4		R4844	ERJ3GEYJ332	M. RESISTOR CH 1/16W 3.3K	1	
R4617, 18	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	2		R4845	ERJ3RED124	M. RESISTOR CH 1/16W 120K	1	
R4619	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1		R4846	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R4620	ERJ14YJ220	M. RESISTOR CH 1/4W 22	1		R4847	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R4621	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1		R4848	ERJ3GEYJ154	M. RESISTOR CH 1/16W 150K	1	
R4622	ERJ14YJ220	M. RESISTOR CH 1/4W 22	1		R4849	ERJ3GEYJ563	M. RESISTOR CH 1/16W 56K	1	
R4623	ERJ3RED680	M. RESISTOR CH 1/16W 68	1						
R4624, 25	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	2		T4801	G5D1A0000028	TRANSFORMER	1	
R4626, 27	ERJ3GEYG472	M. RESISTOR CH 1/16W 4.7K	2						
R4628	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1		VR4401-04	D3EC5502A003	COMBI. R-R 5K	4	
R4629	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		VR4601, 02	D3EC5502A003	COMBI. R-R 5K	2	
R4630	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1						
R4631	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1		ZA4701-03	K4CD01000010	TERMINAL	3	
R4632	ERJ3RBD133	M. RESISTOR CH 1/16W 13K	1						
R4633	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1				MISCELLANEOUS		

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VMP9795	PCB ANGLE	2		C420	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	1	
	XYN26+J6FJ	SCREW	2		C421	F1H1H222A219	C. CAPACITOR CH 50V 2200P	1	
					C422	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
					C423, 24	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	2	
					C425	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
					C426	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
					C428	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	1	
					C429	F1H1H222A219	C. CAPACITOR CH 50V 2200P	1	
■ E3	VEP81280A	POWER MAIN P.C. BOARD	1	(RTL)	C430	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
					C431, 32	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	2	
C1, C2	F1J1E224A137	C. CAPACITOR CH 25V 0. 22U	2		C433	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
C3	ECUX1H103KBV	C. CAPACITOR CH 50V 0. 01U	1		C434	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C4	F1H1H473A783	C. CAPACITOR CH 50V 0. 047U	1		C436	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	1	
C5	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		C437-40	F1H1H102A219	C. CAPACITOR CH 50V 1000P	4	
C6	F1H1C105A118	C. CAPACITOR CH 16V 1U	1						
C7	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		CN1	K1KA34BA0106	CONNECTOR (MALE)	1	
C9	F1H1H222A219	C. CAPACITOR CH 50V 2200P	1		CN2	K1MY16B00001	CONNECTOR	1	
C101	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1						
C103	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		D2	DZ2J075MOL	D1ODE	1	
C105, 06	F1H1H470A231	C. CAPACITOR CH 50V 47P	2		D3	DA2J10100L	D1ODE	1	
C107, 08	F1J1E225A178	C. CAPACITOR CH 25V 2. 2U	2		D101, 02	BOJCPD000031	D1ODE	2	
C109, 10	F1H1H331A792	C. CAPACITOR CH 50V 330P	2		D103	DA2J10100L	D1ODE	1	
C111, 12	F1H1H102A219	C. CAPACITOR CH 50V 1000P	2		D104	BOJCPD000031	D1ODE	1	
C113, 14	F1K1E1060001	C. CAPACITOR CH 25V 10U	2		D105	DA2J10100L	D1ODE	1	
C115, 16	F1J1E225A178	C. CAPACITOR CH 25V 2. 2U	2		D106	BOJCPD000031	D1ODE	1	
C117, 18	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		D107, 08	DZ2J068MOL	D1ODE	2	
C119-26	F1K1E1060001	C. CAPACITOR CH 25V 10U	8		D109, 10	DA2J10100L	D1ODE	2	
C127, 28	F1H1H102A219	C. CAPACITOR CH 50V 1000P	2		D201, 02	DA2J10100L	D1ODE	2	
C201	F1H1H222A219	C. CAPACITOR CH 50V 2200P	1		D203	DZ2J068MOL	D1ODE	1	
C202, 03	F1H1H3300005	C. CAPACITOR CH 50V 33P	2		D204	DZ2J051MOL	D1ODE	1	
C205	F1H1H221A792	C. CAPACITOR CH 50V 220P	1		D301, 02	DA2J10100L	D1ODE	2	
C206, 07	F1G1H1020008	C. CAPACITOR CH 50V 1000P	2		D303	DZ2J036MOL	D1ODE	1	
C210	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		D304	DZ2J056MOL	D1ODE	1	
C211	F1J1E224A137	C. CAPACITOR CH 25V 0. 22U	1		D401	BOJCPD000039	D1ODE	1	
C212	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		D402	DZ2J036MOL	D1ODE	1	
C213	F1J1E224A137	C. CAPACITOR CH 25V 0. 22U	1		D403	BOJCPD000039	D1ODE	1	
C214-16	F1K1E1060001	C. CAPACITOR CH 25V 10U	3		D404	DZ2J150MOL	D1ODE	1	
C217	F2H0J2210003	E. CAPACITOR CH6. 3V 220U	1		D405	DA2J10100L	D1ODE	1	
C218	F2H1A1510001	E. CAPACITOR CH 10V 150U	1		D406	DZ2J180MOL	D1ODE	1	
C219, 20	F1K1E1060001	C. CAPACITOR CH 25V 10U	2		D407	DZ2J047MOL	D1ODE	1	
C221	F1H1A225A051	C. CAPACITOR CH 10V 2. 2U	1						
C222, 23	F1L1C2260020	C. CAPACITOR CH 16V 22U	2		IC1	COCBADC00011	IC	1	
C225	F1H1H102A219	C. CAPACITOR CH 50V 1000P	1		IC2	COBBBA000084	IC	1	
C301	F1H1H222A219	C. CAPACITOR CH 50V 2200P	1		IC101, 02	CODBAYY00437	IC	2	
C303, 04	F1H1H3300005	C. CAPACITOR CH 50V 33P	2		IC201	CODBAZH00020	IC	1	
C306	F1H1H221A792	C. CAPACITOR CH 50V 220P	1		IC301	CODBAZH00020	IC	1	
C307, 08	F1G1H1020008	C. CAPACITOR CH 50V 1000P	2		IC401	CODBAYY00777	IC	1	
C311	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		IC402	CODBAYY00455	IC	1	
C313	F1J1E224A137	C. CAPACITOR CH 25V 0. 22U	1		IC403, 04	CODBAYY00777	IC	2	
C314	F1K1E1060001	C. CAPACITOR CH 25V 10U	1						
C315	F1J1E224A137	C. CAPACITOR CH 25V 0. 22U	1		L101, 02	G1C1R8ZA0156	COIL 1. 8UH	2	
C316-18	F1K1E1060001	C. CAPACITOR CH 25V 10U	3		L103-06	G1C100MA0291	COIL 10UH	4	
C319, 20	F2H0J2210003	E. CAPACITOR CH6. 3V 220U	2		L201-04	JOJBC0000107	FILTER	4	
C321, 22	F1K1E1060001	C. CAPACITOR CH 25V 10U	2		L205	G1C1R8ZA0156	COIL 1. 8UH	1	
C323, 24	F1L1C2260020	C. CAPACITOR CH 16V 22U	2		L206	G1C100MA0145	COIL 10UH	1	
C326	F1L1C2260020	C. CAPACITOR CH 16V 22U	1		L207	G1C150M00015	COIL 15UH	1	
C327	F1H1A225A051	C. CAPACITOR CH 10V 2. 2U	1		L209, 10	G1C1R8ZA0156	COIL 1. 8UH	2	
C328	F1H1H102A219	C. CAPACITOR CH 50V 1000P	1		L301-04	JOJBC0000107	FILTER	4	
C401	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		L305	G1C1R8ZA0156	COIL 1. 8UH	1	
C402	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		L306, 07	G1C100MA0234	COIL 10UH	2	
C403	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		L308-10	G1C1R8ZA0156	COIL 1. 8UH	3	
C404	F1J1A106A043	C. CAPACITOR CH 10V 10U	1		L401	G1C100MA0249	COIL 10UH	1	
C405	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		L402	G1C1R5ZA0240	COIL 1. 5UH	1	
C406	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	1		L403-05	G1C100MA0249	COIL 10UH	3	
C407	F1H1A334A028	C. CAPACITOR CH 10V 0. 33U	1		L406, 07	G1C1R8ZA0156	COIL 1. 8UH	2	
C408	F1J0J226A034	C. CAPACITOR CH6. 3V 22U	1		L408	G1C1R5ZA0240	COIL 1. 5UH	1	
C409	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		L409	G1C1R8ZA0156	COIL 1. 8UH	1	
C410	F1H1A334A028	C. CAPACITOR CH 10V 0. 33U	1		L410	G1C1R5ZA0240	COIL 1. 5UH	1	
C411	F1J1C475A170	C. CAPACITOR CH 16V 4. 7U	1		L411	G1C1R8ZA0156	COIL 1. 8UH	1	
C412	F1H1H104A913	C. CAPACITOR CH 50V 0. 1U	1		L412-15	JOJBC0000009	FILTER	4	
C413	F1J1E105A080	C. CAPACITOR CH 25V 1U	1						
C414	F1K1C226A122	C. CAPACITOR CH 16V 22U	1		Q1, Q2	DRC9144E0L	TRANSISTOR	2	
C415	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		Q3	DSC900100L	TRANSISTOR	1	
C416	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		Q4	DRC9144E0L	TRANSISTOR	1	
C417	F1J1A106A043	C. CAPACITOR CH 10V 10U	1		Q5	DRA9124E0L	TRANSISTOR	1	
C418	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		Q6	DRA9144E0L	TRANSISTOR	1	
					Q8	DRC9144E0L	TRANSISTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q9, 10	DRA9144EOL	TRANSISTOR	2		R208	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
Q11	DRC9144EOL	TRANSISTOR	1		R209	ERJ2RHD362	M. RESISTOR CH 1/16W 3.6K	1	
Q12	DRA9144EOL	TRANSISTOR	1		R210	ERJ2RHD152	M. RESISTOR CH 1/16W 1.5K	1	
Q101, 02	DRC9144EOL	TRANSISTOR	2		R211, 12	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
Q103-06	DSC900100L	TRANSISTOR	4		R215, 16	ERJ2RKD334	M. RESISTOR CH 1/10W 330K	2	
Q107, 08	DMC204010R	TRANSISTOR	2		R217	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
Q109, 10	DSC900100L	TRANSISTOR	2		R219	ERJ2GEJ1R0	M. RESISTOR CH 1/16W 1	1	
Q201, 02	DRC9144EOL	TRANSISTOR	2		R220	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
Q203, 04	B1MBFDA00005	TRANSISTOR	2		R221	D1BZR011A012	M. RESSITOR CH 0.1	1	
Q205	DSC900100L	TRANSISTOR	1		R222	D1BR015A005	M. RESISTOR CH 1W 0.015	1	
Q206	DMC204010R	TRANSISTOR	1		R223, 24	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
Q207	DSC900100L	TRANSISTOR	1		R225	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q208	DMC204010R	TRANSISTOR	1		R226	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
Q301, 02	DRC9144EOL	TRANSISTOR	2		R227	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
Q303, 04	B1MBFDA00005	TRANSISTOR	2		R228	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q305	DSC900100L	TRANSISTOR	1		R229, 30	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	2	
Q306	DMC204010R	TRANSISTOR	1		R231, 32	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2	
Q307	DSC900100L	TRANSISTOR	1		R301	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q308	DMC204010R	TRANSISTOR	1		R303, 04	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2	
Q401	DMC204010R	TRANSISTOR	1		R305	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q402, 03	DRC9144EOL	TRANSISTOR	2		R307	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1	
Q404	DSC900100L	TRANSISTOR	1		R308	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
Q405	DRC9144EOL	TRANSISTOR	1		R309	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
Q406	DMC204010R	TRANSISTOR	1		R310	ERJ2RHD272	M. RESISTOR CH 1/16W 2.7K	1	
Q407, 08	DRC9144EOL	TRANSISTOR	2		R311, 12	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
Q409	DSC900100L	TRANSISTOR	1		R315, 16	ERJ2RKD334	M. RESISTOR CH 1/10W 330K	2	
Q410	DSA900100L	TRANSISTOR	1		R317	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
Q411	DRC9144EOL	TRANSISTOR	1		R319	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
Q412	DSC900100L	TRANSISTOR	1		R320, 21	D1BR027A015	M. RESISTOR CH 1W 0.027	2	
Q413	DMC204010R	TRANSISTOR	1		R322	ERJ2RHD471	M. RESISTOR CH 1/16W 470	1	
Q414	DRC9144EOL	TRANSISTOR	1		R323	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
Q415	DSC900100L	TRANSISTOR	1		R324	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
Q416	DMC204010R	TRANSISTOR	1		R325	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
					R326	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R1	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R327-29	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	3	
R2-R4	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	3		R330, 31	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2	
R5	ERJ2RHD913	M. RESISTOR CH 1/16W 91K	1		R340	ERJ3GEYJ1R0	M. RESISTOR CH 1/16W 1	1	
R6	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R401	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R7	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R402	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R9	ERJ2RHD332	M. RESISTOR CH 1/16W 3.3K	1		R403	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R10	ERJ3GEYJ330	M. RESISTOR CH 1/16W 33	1		R404	ERJ2RHD823	M. RESISTOR CH 1/16W 82K	1	
R11	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R405	ERJ2RHD753	M. RESISTOR CH 1/16W 75K	1	
R12	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R406	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1	
R13, 14	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2		R407	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R16	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R409	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R18	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R411	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1	
R21	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R412	ERJ2RHD362	M. RESISTOR CH 1/16W 3.6K	1	
R22	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R415	ERJ2RHD152	M. RESISTOR CH 1/16W 1.5K	1	
R23	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		R416	ERJ2RKD184	M. RESISTOR CH 1/16W 180K	1	
R24	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R417	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R25	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R418, 19	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	2	
R26	ERJ2RHD912	M. RESISTOR CH 1/16W 9.1K	1		R420	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R101, 02	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R421	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R103, 04	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2		R422	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R105-08	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	4		R423	ERJ2RKD114	M. RESISTOR CH 1/16W 110K	1	
R109, 10	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	2		R425	ERJ2RHD272	M. RESISTOR CH 1/16W 2.7K	1	
R111	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R426	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R112	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1		R427	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R113	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R428	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R114	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1		R429, 30	ERJ2RHD332	M. RESISTOR CH 1/16W 3.3K	2	
R115	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R431	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R116	ERJ2RHD912	M. RESISTOR CH 1/16W 9.1K	1		R432	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R117, 18	ERJ2RHD471	M. RESISTOR CH 1/16W 470	2		R433	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R119, 20	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R434	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R121, 22	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R436	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R123, 24	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	2		R438	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R125	ERJ2RKD134	M. RESISTOR CH 1/16W 130K	1		R439	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R126	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R441	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R127	ERJ2RKD134	M. RESISTOR CH 1/16W 130K	1		R442	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R128	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1		R443	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R129, 30	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	2		R444	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R131, 32	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2		R445	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R133, 34	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R446	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R201	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R447	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R203, 04	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2		R448	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R205	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R450	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1	
R207	ERJ2RHD513	M. RESISTOR CH 1/16W 51K	1		R452	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	

Components identified with the mark have the special characteristics for safety. When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R453	ERJ2RHD331	M.RESISTOR CH 1/16W 330	1	
R455	ERJ2RHD102	M.RESISTOR CH 1/16W 1K	1	
R456	ERJ2RHD153	M.RESISTOR CH 1/16W 15K	1	
R457	ERJ2RKD124	M.RESISTOR CH 1/16W 120K	1	
R458	ERJ2RHD563	M.RESISTOR CH 1/16W 56K	1	
R459	ERJ2RHD333	M.RESISTOR CH 1/16W 33K	1	
R460	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
R461	ERJ2RHD153	M.RESISTOR CH 1/16W 15K	1	
R462-66	ERJ2GEOR00	M.RESISTOR CH 1/16W 0	5	
T101, 02	G1C4R5ZA0211	COIL 4.5UH	2	
ZA1-A4	K4CD01000010	TERMINAL	4	
		MISCELLANEOUS		
	VMZ3684	BARRIER	1	
■ E4	VEP81281A	POWER SUB P.C. BOARD	1 (RTL)	
C1	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	1	
C2	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C5	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	1	
C6-C8	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	3	
C9	F1H1H333A918	C.CAPACITOR CH 50V 0.033U	1	
C10, 11	F1H1H1010005	C.CAPACITOR CH 50V 100P	2	
C12	F1G1H1020008	C.CAPACITOR CH 50V 1000P	1	
C13	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C14	F1H1H102A219	C.CAPACITOR CH 50V 1000P	1	
C15	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	1	
C16	F1H1H333A918	C.CAPACITOR CH 50V 0.033U	1	
C17	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	1	
C18, 19	F2H1E220A009	E.CAPACITOR CH 25V 22U	2	
C22, 23	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	2	
C24-26	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	3	
C27, 28	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	2	
C101	F2A1E152A224	E.CAPACITOR CH 25V 1500U	1	
C104	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	1	
C105	ECUX1H103KBV	C.CAPACITOR CH 50V 0.01U	1	
C106	F1H1H472A219	C.CAPACITOR CH 50V 4700P	1	
C107	F1H0J1050012	C.CAPACITOR CH6.3V 1U	1	
C108	F2H1E220A009	E.CAPACITOR CH 25V 22U	1	
C110, 11	F1H1H104A913	C.CAPACITOR CH 50V 0.1U	2	
C112	F1K1E1060001	C.CAPACITOR CH 25V 10U	1	
CN1	K1KA02A00735	CONNECTOR (MALE)	1	
CN2	K1KA03AA0500	CONNECTOR (MALE)	1	
CN3, N4	K1KA02A00164	CONNECTOR (MALE)	2	
CN5	K1KA02A00023	CONNECTOR (MALE)	1	
CN6	K1KB16A00071	CONNECTOR (FEMALE)	1	
CN101	K1KA03AA0500	CONNECTOR (MALE)	1	
CN102	K1KA02A00735	CONNECTOR (MALE)	1	
D1	BOFCAM000002	DIODE	1	
D2	DA2J10100L	DIODE	1	
D3	BOBC04200008	DIODE	1	
D5	DA2CJ10100L	DIODE	1	
D6, D7	BOHCMM000006	DIODE	2	
D28	DZ2J200MOL	DIODE	1	
D101	BOFCAM000002	DIODE	1	
D102	DA2J10100L	DIODE	1	
△ F1	K5H183AA0013	FUSE	1	
△ F2	K5H802300002	FUSE	1	
△ F3	K5H632300002	FUSE	1	
△ F101	K5H103300003	FUSE	1	
IC1, C2	C0DBZY00372	IC	2	
IC101	C0DBZY00372	IC	1	
L1-L6	VLP0183	COIL	6	
L7	JOJBC0000019	FILTER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L8	JOJKC0000009	FILTER	1	
L9	JOJBC0000019	FILTER	1	
L101-03	VLP0183	COIL	3	
△ PA1	D4FBR200A018	POLY SWITCH RESETTABLE	1	
PC1	B3PBA0000215	PHOTO COUPLER	1	
Q1	B1CFRG000028	TRANSISTOR	1	
Q2	DSC900100L	TRANSISTOR	1	
Q3	B1CFRG000028	TRANSISTOR	1	
Q4	DSC900100L	TRANSISTOR	1	
Q5	DRC9144EOL	TRANSISTOR	1	
Q6	DRA9144EOL	TRANSISTOR	1	
Q7	DRC9144EOL	TRANSISTOR	1	
Q8	DSC900100L	TRANSISTOR	1	
Q9	DSA900100L	TRANSISTOR	1	
Q10	DRC9144EOL	TRANSISTOR	1	
Q54, 55	DRC9144EOL	TRANSISTOR	2	
Q101	B1CFRG000028	TRANSISTOR	1	
Q102	DSC900100L	TRANSISTOR	1	
Q103-06	DRC9144EOL	TRANSISTOR	4	
R1	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
R2	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R3	D1BRRO50A005	M.RESSISTOR CH 1W 0.05	1	
R4	D1BZRO11A012	M.RESSISTOR CH 0.1	1	
R5	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1	
R6	ERJ3RBD823	M.RESISTOR CH 1/16W 82K	1	
R7	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1	
R8	ERJ3RBD512	M.RESISTOR CH 1/16W 5.1K	1	
R9	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	1	
R10	ERJ3RBD823	M.RESISTOR CH 1/16W 82K	1	
R11	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R12	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	1	
R14	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
R15	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1	
R16	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R17	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R18	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R19	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1	
R20	ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R21	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R22	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
R23-25	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	3	
R27-30	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	4	
R33, 34	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	2	
R35	ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R36, 37	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	2	
R38	D1BRRO18A005	M.RESISTOR CH 1W 0.018	1	
R39	D1JB10M00001	COMB1.R-R	1	
R40	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1	
R41	ERJ3RBD823	M.RESISTOR CH 1/16W 82K	1	
R42	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1	
R43	ERJ3RBD512	M.RESISTOR CH 1/16W 5.1K	1	
R44	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	1	
R45	ERJ3RBD823	M.RESISTOR CH 1/16W 82K	1	
R46	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R47	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	1	
R49	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1	
R50, 51	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	2	
R52, 53	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	2	
R54	ERJ3GEYG332	M.RESISTOR CH 1/16W 3.3K	1	
R55-57	ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	3	
R58	ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R101	ERJ3GEYJ100	M.RESISTOR CH 1/16W 10	1	
R102	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R103	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
R104	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	1	
R105	ERJ3RBD223	M.RESISTOR CH 1/16W 22K	1	
R106	ERJ3RBD333	M.RESISTOR CH 1/16W 33K	1	
R107	D1JB10M00001	COMB1.R-R	1	
R108	D1JB6M80A009	COMB1.R-R	6.8	
R110	ERJ3RBD823	M.RESISTOR CH 1/16W 82K	1	
R111	ERJ3RBD822	M.RESISTOR CH 1/16W 8.2K	1	
R112	ERJ3RBD512	M.RESISTOR CH 1/16W 5.1K	1	
R113	ERJ3RBD104	M.RESISTOR CH 1/16W 100K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R114	ERJ3RBD823	M. RESISTOR CH 1/16W 82K	1		C704	EEFUD0J151E	E. CAPACITOR 6.3V 150U	1	
R115, 16	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	2		C705	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R117	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		C706	EEFUD0J151E	E. CAPACITOR 6.3V 150U	1	
R119	ERJ3GEYR000	M. RESISTOR CH 1/16W 0	1		C713	F1H0J475A009	C. CAPACITOR CH6.3V 4.7U	1	
R120	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1		C714, 15	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
R121	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1		C716	F1G1H8R00009	C. CAPACITOR CH 50V 8P	1	
					C717	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
ZA1, A2	K4CD01000015	TERMINAL	2		C718	F1G1H8R00009	C. CAPACITOR CH 50V 8P	1	
					C719-21	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
					C722	F1H0J475A009	C. CAPACITOR CH6.3V 4.7U	1	
					C723, 24	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
					C725	F1J0J226A014	C. CAPACITOR CH6.3V 22U	1	
■ E5	VEP80E85A	MOTHER P. C. BOARD	1	(RTL)	C726	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
					C728	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
					C729	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
					C730	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C3, C4	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	2		C735	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C101, 02	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C736	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1	
C103, 04	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C737, 38	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C106	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C739	F1G1H103A706	C. CAPACITOR CH 50V 0.01U	1	
C200-05	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	6		C740	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1	
C206	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C742	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C207	F1J1A106A043	C. CAPACITOR CH 10V 10U	1		C800	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C208	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C801	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	
C209	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C802	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C210	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C803	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	
C211-15	F1G1H1020008	C. CAPACITOR CH 50V 1000P	5		C804	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C216	F1H1H102A219	C. CAPACITOR CH 50V 1000P	1		C805	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	
C217	F1J1A106A043	C. CAPACITOR CH 10V 10U	1		C806	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C218	F1J0J226A014	C. CAPACITOR CH6.3V 22U	1		C807	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1	
C219, 20	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C808	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C311-13	F1H0J1060006	C. CAPACITOR CH6.3V 10U	3		C809	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C314	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C812	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C315, 16	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C813	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C317	F1G1C223A081	C. CAPACITOR CH 16V 0.022U	1		C814	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C318	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C815	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1	
C320	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		C817	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C326	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		C818	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C331	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C901	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C332	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		C902	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C333	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1		C904	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C334-36	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		C905	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C337	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C910	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C338	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C911	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C400	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C913	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C401-03	F1G1H1020008	C. CAPACITOR CH 50V 1000P	3		C914, 15	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C404, 05	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C916	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C406	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C917	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C407-09	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		C918	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C410	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C919	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C411	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C920	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1	
C413	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C1001	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C414, 15	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	2		C1003	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C416	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C1004	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C503	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1005	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C507	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1006	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C509-11	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		C1007, 08	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C512, 13	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	2		C1009	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C514	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1011	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C518	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1013	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C519	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C1014	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C520, 21	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1015	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C522	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C1016	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C523	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1033	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C524	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		C1034	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C601, 02	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2		C1035	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1	
C603	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1036, 37	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C606, 07	F1G1H120A565	C. CAPACITOR CH 50V 12P	2		C1038	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1	
C608, 09	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2		C1108, 09	F1L1A4760003	C. CAPACITOR CH 16V 47U	2	
C610	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1		C1110, 11	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C611	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1112, 13	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C612	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C1114-17	F1G1H101A565	C. CAPACITOR CH 50V 100P	4	
C613	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1118, 19	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C614	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C1120, 21	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C617	F1G1H103A706	C. CAPACITOR CH 50V 0.01U	1		C1122-25	F1L1A4760003	C. CAPACITOR CH 16V 47U	4	
C700	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1126, 27	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C703	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1128, 29	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C1130, 31	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C1631	F1G1H821A571	C. CAPACITOR CH 50V 820P	1	
C1132-34	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		C1632	F1G1H120A565	C. CAPACITOR CH 50V 12P	1	
C1135	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1633, 34	F1H0J1060006	C. CAPACITOR CH6.3V 10U	2	
C1136	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1635-38	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
C1137	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1639	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1138	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1640, 41	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1139	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1700	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1140, 41	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1701	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C1146	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1702	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1147, 48	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1703	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1149	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1704-06	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C1150	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1708	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1152	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1710-16	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	7	
C1200-02	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		C1717	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1203	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1		C1719	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1204-18	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	15		C1800	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C1219-43	F1G1H101A565	C. CAPACITOR CH 50V 100P	25		C1801	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1244	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1802, 03	F1L1C106A009	C. CAPACITOR CH 16V 10U	2	
C1245	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C1804	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C1246-49	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4		C1805, 06	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1250	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C1807	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1251-54	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4		C1808	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1255	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C1809	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1256-64	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	9		C1810	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1265-67	F1G1H101A565	C. CAPACITOR CH 50V 100P	3		C1811-13	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C1268	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1814	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1269-71	F1G1H101A565	C. CAPACITOR CH 50V 100P	3		C1815	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1272	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1819	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1273-78	F1G1H101A565	C. CAPACITOR CH 50V 100P	6		C1821, 22	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1279-90	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	12		C1824, 25	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1291	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C1827-29	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C1293, 94	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1900	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1295	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1		C1901	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1296, 97	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1906, 07	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C1298	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1908, 09	F1H0J474A012	C. CAPACITOR CH6.3V 0.47U	2	
C1299	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1910, 11	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2	
C1300, 01	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C1912	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1302, 03	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1913	F1H1H473A783	C. CAPACITOR CH 50V 0.047U	1	
C1304, 05	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2		C1914	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1306, 07	F1L1A4760003	C. CAPACITOR CH 16V 47U	2		C1915	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1308	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1916	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1309	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C1917	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1310	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1918	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1311	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1919	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1314	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1920	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1315	F1H1H104A220	C. CAPACITOR CH 50V 0.1U	1		C1921	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1500, 01	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1922	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1503	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1923	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1506	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1		C1924	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1507	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1925	F1G1H100A565	C. CAPACITOR CH 50V 10P	1	
C1509	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C1926, 27	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C1511	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1928	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1513	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C1929	F1G1H120A565	C. CAPACITOR CH 50V 12P	1	
C1516	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C1930, 31	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1521, 22	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1932, 33	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2	
C1524, 25	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1934	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1530, 31	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2		C1935	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C1533, 34	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2		C1936	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1539, 40	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1937-40	F1G1H1020008	C. CAPACITOR CH 50V 1000P	4	
C1542, 43	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1941, 42	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1545	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C1943	F1H0J475A009	C. CAPACITOR CH6.3V 4.7U	1	
C1547	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C1944	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1548, 49	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		C1945	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1550	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C2000, 01	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1551	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C2008-11	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
C1552, 53	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C2012-15	F1G0J1050007	C. CAPACITOR CH6.3V 1U	4	
C1554	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C2016	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1555-57	F1G1H101A565	C. CAPACITOR CH 50V 100P	3		C2017	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1558-63	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	6		C2018	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1614-18	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	5		C2019	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1619, 20	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		C2020	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1621	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1		C2021	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1622-25	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4		C2022	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1626	F1L1C106A009	C. CAPACITOR CH 16V 10U	1		C2023	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1627, 28	F1H0J1060006	C. CAPACITOR CH6.3V 10U	2		C2024	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1629	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		C2026	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1630	F1G1H5610004	C. CAPACITOR CH 50V 560P	1		C2028-31	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C2033	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		CN201	K1KA30AA0044	CONNECTOR (MALE)	1	
C2034	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		CN300	K1KYG0A00006	CONNECTOR	1	
C2035	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		CN301, 02	K1KA70AA0044	CONNECTOR (MALE)	2	
C2036, 37	F1H0J475A009	C. CAPACITOR CH6. 3V 4.7U	2		CN400	K1KY40A00029	CONNECTOR	1	
C2039	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		CN500	K1KY08AA0050	CONNECTOR	1	
C2040, 41	F1H0J475A009	C. CAPACITOR CH6. 3V 4.7U	2		CN501	K1KY30AA0778	CONNECTOR	1	
C2042, 43	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2		CN502	K1KY08A00007	CONNECTOR ACCESSORY	1	
C2044	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		CN503	K1MN24BA0059	CONNECTOR	1	
C2045	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		CN504	K1KY10AA0550	CONNECTOR	1	
C2046	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		CN600	K1KA06B00140	CONNECTOR (MALE)	1	
C2047	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		CN601	K1KY30A00042	CONNECTOR	1	
C2048	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		CN602	K1KA05A00218	CONNECTOR (MALE)	1	
C2049	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		CN604	K1KA10B00169	CONNECTOR (MALE)	1	
C2050	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		CN800	K1KA30A00227	CONNECTOR (MALE)	1	
C2051-53	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		CN801	K1KA08A00445	CONNECTOR (MALE)	1	
C2054, 55	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	2		CN1200	K1KA08BA0081	CONNECTOR (MALE)	1	
C2056	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1						
C2057	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		D101	BOJCEP000008	D1ODE	1	
C2058, 59	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		D102	DZ2J033MOL	D1ODE	1	
C2060	F1H0J475A009	C. CAPACITOR CH6. 3V 4.7U	1		D300	DZ2J091MOL	D1ODE	1	
C2063, 64	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	2		D601-05	D4ED1270A007	VARISTOR	5	
C2065, 66	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	2		D810	D4ED1270A008	VARISTOR	1	
C2067	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		D811	DA3S101FOL	D1ODE	1	
C2068	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		D812-15	D4ED1270A003	VARISTOR	4	
C2069	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		D1201-04	D4ED1270A003	VARISTOR	4	
C2070-77	F1G1H1020008	C. CAPACITOR CH 50V 1000P	8		D1600, 01	DA3J101FOL	D1ODE	2	
C2078	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		D1800	MA3J7420GL	D1ODE	1	
C2079	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		D2000	DA2S10100L	D1ODE	1	
C2080	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		D2100	MA3J7420GL	D1ODE	1	
C2081	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1						
C2082, 83	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		IC100, 01	C1CB00002542	IC	2	
C2085	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC102	C0CBAHC00004	IC	1	
C2086	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC103	C0CBCY000017	IC	1	
C2087, 88	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	2		IC104	COJBAB000660	IC	1	
C2089	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC105	COJBAB000851	IC	1	
C2090	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC106	TC74VHC157	IC	1	
C2091	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC107	COJBAB000332	IC	1	
C2092	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC108	C0DBAFH00039	IC	1	
C2093	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC109	COJBAB000262	IC	1	
C2094	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC300	COEBE0000348	IC	1	
C2100, 01	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	2		IC301	COEBAKE00009	IC	1	
C2102	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC302, 03	COABBA000025	IC	2	
C2103	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		IC304	TLCX245FT	IC	1	
C2104	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC400	C0CBCBC00048	IC	1	
C2105	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC700	C0DBZY000026	IC	1	
C2106	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC701	C1CB00003245	IC	1	
C2107-09	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		IC702	C1CB00002807	IC	1	
C2110	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		IC708	COJBAB000660	IC	1	
C2111	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC800	COEBC0000156	IC	1	
C2116, 17	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		IC801	COEBF0000264	IC	1	
C2118, 19	F1L1C106A009	C. CAPACITOR CH 16V 10U	2		IC802	COEBA0000027	IC	1	
C2120, 21	F1G1H150A565	C. CAPACITOR CH 50V 15P	2		IC803	COEBD0000224	IC	1	
C2124-28	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	5		IC804	COJBAB000192	IC	1	
C2129	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		IC900	COJBAB0001825	IC	1	
C2130	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC902, 03	COJBAB0001825	IC	2	
C2131	F1L1C106A009	C. CAPACITOR CH 16V 10U	1		IC905	C0CBCBC00053	IC	1	
C2132	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC906, 07	COJBAB0001825	IC	2	
C2133	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		IC908	COBBBA000024	IC	1	
C2134	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC1000	C0CBCBC00053	IC	1	
C2135	F1L1C106A009	C. CAPACITOR CH 16V 10U	1		IC1001	C1AB00003023	IC	1	
C2136-45	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	10		IC1004	COJBAB000224	IC	1	
C2146	F1H0J475A009	C. CAPACITOR CH6. 3V 4.7U	1		IC1005	COJBAB000851	IC	1	
C2147	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC1100	C1ZBZ0004281	IC	1	
C2148	F1H0J475A009	C. CAPACITOR CH6. 3V 4.7U	1		IC1101	COJBAD000207	IC	1	
C2149	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC1102	COJBAB0002192	IC	1	
C2150	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC1201	C3HBM0000001	IC	1	
C2151	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC1204	C0CBCBC00053	IC	1	
C2152	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC1205	C0CBCBC00048	IC	1	
C2153	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC1300	C1AB00003111	IC	1	
C2154, 55	F1H0J475A009	C. CAPACITOR CH6. 3V 4.7U	2		IC1503	C0DBFY000222	IC	1	
CN1	K1KB34A00019	CONNECTOR (FEMALE)	1		IC1600	COJBAB0002328	IC	1	
CN2	K1KA16B00104	CONNECTOR (MALE)	1		IC1601	COABBB000196	IC	1	
CN100	K1KYG0A00006	CONNECTOR	1		IC1602	COBBBA000024	IC	1	
CN101	K1KA70AA0044	CONNECTOR (MALE)	1		IC1603	COABBB000196	IC	1	
CN102	K1KY50AA0747	CONNECTOR	1		IC1700	C1CB00002847	IC	1	
CN200	K1KA50AA0044	CONNECTOR (MALE)	1		IC1701-04	COJBAB0001728	IC	4	
					IC1705	C0CBCAC00060	IC	1	

Components identified with the mark  have the special characteristics for safety.
When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC1800	C0CBAD000042	IC	1		L1508, 09	JOJHC0000032	FILTER	2	
IC1801	C0FBFB000058	IC	1		L1511, 12	JOJHC0000032	FILTER	2	
IC1802	C0CBBD000004	IC	1		L1513	JOJHC0000009	FILTER	1	
IC1803	C0CBBC000049	IC	1		L1600-02	JOJCC0000405	FERRITE CORE	3	
IC1804-06	GOABGB000027	IC	3		L1700	JOJHC0000032	FILTER	1	
IC1901	C1AB00003286	IC	1		L1703	JOJHC0000032	FILTER	1	
IC1902	C0DBFY000230	IC	1		L1800-04	JOJDC0000102	FILTER	5	
IC1903	C0DBAY000805	IC	1		L1805-07	JOE3005B0008	LCR FILTER	3	
IC2000, 01	C1AB00003287	IC	2		L1900	JOJCC0000078	FILTER	1	
IC2003	C0JBAE000321	IC	1		L1902	G1C6N8J00006	COIL 6.8UH	1	
IC2004, 05	C0DBFY000230	IC	2		L1903-05	JOJCC0000078	FILTER	3	
IC2006, 07	C0JBAB000660	IC	2		L1907	G1C4R7MA0249	COIL 4.7UH	1	
IC2100	C0CBBC000053	IC	1		L2002, 03	G1C8N2J00002	COIL 8.2UH	2	
IC2101	C0FBFB000056	IC	1		L2004, 05	G1C6N8J00006	COIL 6.8UH	2	
IC2102	C0CBAD000042	IC	1		L2011	JOJBC0000019	FILTER	1	
IC2103	C0CBBD000004	IC	1		L2012, 13	JOJHC0000032	FILTER	2	
IC2104, 05	GOABGB000027	IC	2		L2014-17	JOJDC0000102	FILTER	4	
IC2107	C0CBBC000053	IC	1		L2018, 19	JOJHC0000032	FILTER	2	
IC2108, 09	C0DBAY000805	IC	2		L2020-23	JOJDC0000102	FILTER	4	
					L2100	JOJCC0000405	FERRITE CORE	1	
IP1200	VEF0116	IC	1		L2102	JOE1355B0002	FILTER	1	
IP1201	C1ZBZ0003000	IC	1		L2103, 04	JOJCC0000405	FERRITE CORE	2	
					L2110, 11	G1C4R7MA0249	COIL 4.7UH	2	
JK1900	VJP4131	CONNECTOR (MALE)	1		L2112, 13	ERJ3GEY0R00	M. RESISTOR CH 1/16W	0	2
JK2000, 01	VJP4131	CONNECTOR (MALE)	2						
					△ PA1	D4FB1R10A019	POLY SWITCH RESETTABLE	1	
L102, 03	JOJCC0000405	FERRITE CORE	2		△ PA2	D4FB1R750A019	POLY SWITCH RESETTABLE	1	
L105-08	JOJHC0000032	FILTER	4		△ PA3	D4FB1R10A019	POLY SWITCH RESETTABLE	1	
L109, 10	JOJEC0000012	FILTER	2		△ PA101	K5H2021A0004	FUSE	1	
L111	JOJCC0000405	FERRITE CORE	1		△ PA201	K5H5011A0004	FUSE	1	
L112, 13	G1C1R1MA0077	COIL 1.1UH	2		△ PA401-03	K5H5011A0004	FUSE	3	
L300, 01	JOJHC0000032	FILTER	2		△ PA501, 02	K5H5011A0004	FUSE	2	
L304, 05	JOJHC0000032	FILTER	2						
L306	JOJCC0000405	FERRITE CORE	1		Q200	DRA9144E0L	TRANSISTOR	1	
L403	JOJAD0000028	FILTER	1		Q201	B1ABBL000006	TRANSISTOR	1	
L404	JOJAB0000225	FILTER	1		Q202	2SB12200RL	TRANSISTOR	1	
L412-15	JOJHC0000032	FILTER	4		Q203	DRA9144E0L	TRANSISTOR	1	
L510	JOJCC0000009	FILTER	1		Q204	DRC9144E0L	TRANSISTOR	1	
L511, 12	JOJHC0000032	FILTER	2		Q205-07	DSC900100L	TRANSISTOR	3	
L513-23	JOJBC0000019	FILTER	11		Q300	DRC9144E0L	TRANSISTOR	1	
L524	JOJHC0000032	FILTER	1		Q301	B1DGC000002	TRANSISTOR	1	
L525	JOJDC0000099	FILTER	1		Q302	B1ABNF000006	TRANSISTOR	1	
L526	JOJHC0000032	FILTER	1		Q303, 04	DRC9144E0L	TRANSISTOR	2	
L601, 02	JOJDC0000099	FILTER	2		Q700, 01	DRC9114Y0L	TRANSISTOR	2	
L608-11	JOJDC0000099	FILTER	4		Q702	B1CHHD000008	TRANSISTOR	1	
L612-17	JOJBC0000019	FILTER	6		Q1701	DRC9144E0L	TRANSISTOR	1	
L618	JOJCC0000009	FILTER	1		Q2000	DRA9114E0L	TRANSISTOR	1	
L619	JOJBC0000019	FILTER	1		Q2001	DRC9123J0L	TRANSISTOR	1	
L620	JOJDC0000099	FILTER	1						
L621	JOJBC0000019	FILTER	1		R3-14	ERJ3GEY0R00	M. RESISTOR CH 1/16W	0	12
L622, 23	JOJDC0000099	FILTER	2		R15	ERJ2RHD103	M. RESISTOR CH 1/16W	10K	1
L624-29	JOJBC0000019	FILTER	6		R16	EXB24VR000	COMBI. R-R	0	1
L630	JOJCC0000009	FILTER	1		R19	ERJ2RHD103	M. RESISTOR CH 1/16W	10K	1
L700, 01	JOJHC0000032	FILTER	2		R20-27	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	8
L702, 03	JOJBC0000019	FILTER	2		R28	ERJ2RHD101	M. RESISTOR CH 1/16W	100	1
L704	JOJCC0000405	FERRITE CORE	1		R101, 02	ERJ3RBD101	M. RESISTOR CH 1/16W	100	2
L712	JOJCC0000009	FILTER	1		R103, 04	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	2
L713, 14	JOJHC0000032	FILTER	2		R105, 06	ERJ2GE0R00	M. RESISTOR CH 1/16W	0	2
L715	JOJCC0000405	FERRITE CORE	1		R107	ERJ2RHD223	M. RESISTOR CH 1/16W	22K	1
L900, 01	JOJCC0000405	FERRITE CORE	2		R108	EXB24VR000	COMBI. R-R	0	1
L904	JOJEC0000012	FILTER	1		R109	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	1
L905	JOJCC0000405	FERRITE CORE	1		R200	ERJ2RHD104	M. RESISTOR CH 1/16W	100K	1
L906-09	JOJEC0000012	FILTER	4		R201	ERJ2RHD473	M. RESISTOR CH 1/16W	47K	1
L910, 11	JOJCC0000405	FERRITE CORE	2		R203	ERJ2RHD473	M. RESISTOR CH 1/16W	47K	1
L1001	JOJCC0000405	FERRITE CORE	1		R204, 05	ERJ2GEJ224	M. RESISTOR CH 1/16W	220K	2
L1002	JOJHC0000032	FILTER	1		R206	ERJ2RHD472	M. RESISTOR CH 1/16W	4.7K	1
L1004	JOJCC0000405	FERRITE CORE	1		R207	ERJ2RHD223	M. RESISTOR CH 1/16W	22K	1
L1005	JOJEC0000012	FILTER	1		R208, 09	ERJ2GE0R00	M. RESISTOR CH 1/16W	0	2
L1100, 01	JOJCC0000405	FERRITE CORE	2		R210	EXB24VR000	COMBI. R-R	0	1
L1103	JOJCC0000405	FERRITE CORE	1		R211	ERJ2RHD104	M. RESISTOR CH 1/16W	100K	1
L1105-13	JOJHC0000032	FILTER	9		R212	ERJ2RHD123	M. RESISTOR CH 1/16W	12K	1
L1114	JOJCC0000405	FERRITE CORE	1		R213, 14	ERJ2RHD103	M. RESISTOR CH 1/16W	10K	2
L1200	JOJCC0000405	FERRITE CORE	1		R215	ERJ2GE0R00	M. RESISTOR CH 1/16W	0	1
L1202, 03	JOJCC0000405	FERRITE CORE	2		R216	ERJ2RHD331	M. RESISTOR CH 1/16W	330	1
L1204	JOJHC0000032	FILTER	1		R217, 18	ERJ2GEJ153	M. RESISTOR CH 1/16W	15K	2
L1500	JOJCC0000009	FILTER	1		R219	ERJ2GEJ273	M. RESISTOR CH 1/16W	27K	1
L1502	JOJCC0000009	FILTER	1		R220, 21	ERJ2GEJ153	M. RESISTOR CH 1/16W	15K	2

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R223, 24	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R935	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R225	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1000	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R226, 27	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1002, 03	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R303	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1004	ERJ2RKD680	M. RESISTOR CH 1/16W 68	1	
R304	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1005	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R306-09	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	4		R1009, 10	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2	
R310	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1017	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R312-15	EXBN8V222J	COMBI. R-R	22	4	R1018	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R316	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1020	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R317	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1101-07	ERJ3RBD101	M. RESISTOR CH 1/16W 100	7	
R322	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1108, 09	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R323	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R1110	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R324	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1112-14	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	3	
R325	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R1116, 17	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2	
R327, 28	EXBN8V222J	COMBI. R-R	22	2	R1130-32	EXBN8V330J	COMBI. R-R	33	3
R329	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1134-39	EXBN8V330J	COMBI. R-R	33	6
R330	EXB24VR000	COMBI. R-R	0	1	R1140-45	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6	
R400	EXB24VR000	COMBI. R-R	0	1	R1146	EXBN8V330J	COMBI. R-R	33	1
R401	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1149, 50	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R409	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R1157, 58	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
R411	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R1162	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R423-31	EXBN8V222J	COMBI. R-R	22	9	R1164	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R432-35	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4		R1165-73	EXBN8V222J	COMBI. R-R	22	9
R436	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1174, 75	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R437	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1177-83	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	7	
R515	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1187-91	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	5	
R516-18	EXB28VR000	COMBI. R-R	0	3	R1200, 01	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R701, 02	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R1202, 03	EXBN8V222J	COMBI. R-R	22	2
R706	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1204, 05	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R708	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1206	EXBN8V222J	COMBI. R-R	22	1
R710	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1207, 08	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R711	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1209, 10	EXBN8V222J	COMBI. R-R	22	2
R712	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1211, 12	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R714	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1213	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R718	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1		R1214	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R719	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1215	EXBN8V222J	COMBI. R-R	22	1
R721	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1216	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R722	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1217	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R723	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1218, 19	EXBN8V330J	COMBI. R-R	33	2
R724	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1220-23	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4	
R725	ERJ2RHD2431	M. RESISTOR CH 1/16W 2.43K	1		R1224, 25	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R726	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1226-29	EXBN8V222J	COMBI. R-R	22	4
R727	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1230-46	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	17	
R728	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1247	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R739, 40	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2		R1248	EXBN8V330J	COMBI. R-R	33	1
R741	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1		R1249	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R743	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1250	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R746	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1251	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R748, 49	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R1252-57	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	6	
R800	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		R1259	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R801	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1260	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R802	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1261, 62	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R803, 04	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1263	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R807	EXBN8V102J	COMBI. R-R	1K	1	R1267, 68	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R808, 09	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R1269	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R812	EXBN8V473J	COMBI. R-R	47K	1	R1270	EXBN8V222J	COMBI. R-R	22	1
R813, 14	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	2		R1271	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R815	EXBN8V222J	COMBI. R-R	22	1	R1272-89	EXBN8V222J	COMBI. R-R	22	18
R816	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1290, 91	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
R900, 01	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R1292-96	EXBN8V330J	COMBI. R-R	33	5
R902-05	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	4		R1297-01	EXBN8V470J	COMBI. R-R	47	5
R906	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1		R1302	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R907-14	ERJ2RHD101	M. RESISTOR CH 1/16W 100	8		R1303	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R915	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1		R1304	EXBN8V330J	COMBI. R-R	33	1
R916	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1401	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R917-19	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	3		R1403, 04	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
R920	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1405	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1	
R921	ERJ2RKD680	M. RESISTOR CH 1/16W 68	1		R1409-13	EXBN8V470J	COMBI. R-R	47	5
R922, 23	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	2		R1414-18	EXBN8V330J	COMBI. R-R	33	5
R924, 25	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		R1419, 20	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R926	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R1421-24	EXBN8V470J	COMBI. R-R	47	4
R927, 28	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		R1425-27	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3	
R929	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1		R1428-31	EXBN8V330J	COMBI. R-R	33	4
R930, 31	ERJ2RKD680	M. RESISTOR CH 1/16W 68	2		R1432	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R932	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1433	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R933	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R1434-36	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	3	
R934	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1437	EXBN8V470J	COMBI. R-R	47	1

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C216	F1G1H320004	C. CAPACITOR CH 50V 3300P	1	
C217-21	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	5	
C224	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C302	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C303	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C304, 05	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C307	F1G1H100A565	C. CAPACITOR CH 50V 10P	1	
C308	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C309	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C310	F1G1H8R0A564	C. CAPACITOR CH 50V 8P	1	
C312	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C313	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C315	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C316	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C323, 24	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C326	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C327	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C333	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C334	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C336	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C337	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C339	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C340	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C341	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C342	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C400, 01	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C403	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C404	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C406	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C407	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C409	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C410	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C411, 12	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C500, 01	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C506, 07	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C509, 10	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
C511	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C512	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C513-15	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C516, 17	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C518, 19	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C702	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C703	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C704	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C710	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C711-14	F1G0J1050007	C. CAPACITOR CH6.3V 1U	4	
C715	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C716, 17	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C720	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C722-29	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	8	
C730	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C731	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C732	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C733-35	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C736-45	F1G1H101A565	C. CAPACITOR CH 50V 100P	10	
C746-49	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
C750	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C751-53	F1G0J1050007	C. CAPACITOR CH6.3V 1U	3	
C754-56	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C757	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C764-67	F1G0J1050007	C. CAPACITOR CH6.3V 1U	4	
C772, 73	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C776-85	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	10	
C786-89	F1G1H101A565	C. CAPACITOR CH 50V 100P	4	
C790	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C791-93	F1G1H101A565	C. CAPACITOR CH 50V 100P	3	
C794	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C795-99	F1G1H101A565	C. CAPACITOR CH 50V 100P	5	
C800	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C804	F1H1A4750004	C. CAPACITOR CH 10V 4.7U	1	
C805	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C901	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C903	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C904	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C905-12	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C913-20	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	8	
C922	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C924	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C925	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C926-33	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C934-45	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	12	
C947	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C948	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C949-56	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C957-64	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	8	
C966	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C967	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C968-75	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C976-85	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	10	
C1000-02	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C1003, 04	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C1005	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1007	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1009	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1010	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1011	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1012	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1013-15	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C1016	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1017	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1018	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1019	F1G1H330A565	C. CAPACITOR CH 50V 33P	1	
C1020	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1021	F1G1H120A565	C. CAPACITOR CH 50V 12P	1	
C1024	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
C1025, 26	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
C1027-30	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
C1032	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1033, 34	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1100	F1G1H100A565	C. CAPACITOR CH 50V 10P	1	
C1101	F1G1H9R00006	C. CAPACITOR CH 50V 9P	1	
C1103	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1104-06	F1G0J1050007	C. CAPACITOR CH6.3V 1U	3	
C1108	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1109	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1111	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1114	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1115-26	F1G1H101A565	C. CAPACITOR CH 50V 100P	12	
C1127, 28	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C1130-35	F1G1H101A565	C. CAPACITOR CH 50V 100P	6	
C1138-43	F1G1H101A565	C. CAPACITOR CH 50V 100P	6	
C1144	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1145-48	F1G1H101A565	C. CAPACITOR CH 50V 100P	4	
C1149-61	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	13	
C1162	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1163-66	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
C1168	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1169	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
C1170-79	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	10	
C1180	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1181, 82	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1185	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C1186	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1188	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C1189	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1190	F1H1A4750004	C. CAPACITOR CH 10V 4.7U	1	
C1191	F1H0J1060006	C. CAPACITOR CH6.3V 10U	1	
C1192	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1300, 01	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1302, 03	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C1304-11	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	8	
C1312-21	F1G1H101A565	C. CAPACITOR CH 50V 100P	10	
C1322, 23	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C1324, 25	F1G0J1050007	C. CAPACITOR CH6.3V 1U	2	
C1326-33	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	8	
C1334-43	F1G1H101A565	C. CAPACITOR CH 50V 100P	10	
C1344	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1345	F1G0J1050007	C. CAPACITOR CH6.3V 1U	1	
C1346-49	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
C1350-54	F1G1H101A565	C. CAPACITOR CH 50V 100P	5	
C1400-02	F1H0J1060006	C. CAPACITOR CH6.3V 10U	3	
C1403	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C1404, 05	F1G1H7R00008	C. CAPACITOR CH 50V 7P	2	
C1406	F1G1H3320004	C. CAPACITOR CH 50V 3300P	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C1407, 08	F1H0J2250008	C. CAPACITOR CH6. 3V 2. 2U	2		IC200	COEBF0000264	IC	1	
C1409	F1G1H3320004	C. CAPACITOR CH 50V 3300P	1		IC202	COEBC0000156	IC	1	
C1410, 11	F1H0J2250008	C. CAPACITOR CH6. 3V 2. 2U	2		IC205	COEBA0000038	IC	1	
C1416, 17	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2		IC206	COEBA0000039	IC	1	
C1500	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC209	COJBAA000374	IC	1	
C1501	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC210	COJBAZ002192	IC	1	
C1504-12	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	9		IC211	COJBAB000832	IC	1	
C1514	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC212	COJBAB000671	IC	1	
C1516-24	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	9		IC213	COJBAA000117	IC	1	
C1600	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC214	COJBAZ002392	IC	1	
C1601, 02	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	2		IC216	COEBA0000039	IC	1	
C1607, 08	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2		IC300	COCBCBC00053	IC	1	
C1700-04	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	5		IC301, 02	COJBAA0001825	IC	2	
C1705	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC303, 04	COJBAB000662	IC	2	
C1706-09	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	4		IC305	COJBAB000660	IC	1	
C1710-15	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	6		IC306	COJBAA0001825	IC	1	
C1716	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC307	COJBAA000358	IC	1	
C1717-20	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	4		IC309, 10	COJBAA0001825	IC	2	
C1721-25	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	5		IC311, 12	C1CB00002542	IC	2	
C1726-29	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	4		IC400	MN1A92120R1	IC	1	
C1730	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC401-03	COJBAA0001880	IC	3	
C1731-42	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	12		IC501	COJBAA000362	IC	1	
C1743	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC700	CODBZGG00060	IC	1	
C1744-54	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	11		IC701	COJBAA000381	IC	1	
C1755, 56	F1G1E1030005	C. CAPACITOR CH 25V 0. 01U	2		IC702, 03	COJBAB000621	IC	2	
C1757	F1G1H3320004	C. CAPACITOR CH 50V 3300P	1		IC705	CODBAYY00805	IC	1	
C1758-60	F1H0J2250008	C. CAPACITOR CH6. 3V 2. 2U	3		IC900-03	C3ABT6000007	IC	4	
C1761	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC1000	COCBCBC00053	IC	1	
C1762-68	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	7		IC1001	BH7086KV	IC	1	
C1769	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC1002	COJBAA000851	IC	1	
C1770-76	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	7		IC1003, 04	COJBAB000662	IC	2	
C1777	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC1005, 06	COJBAA000851	IC	2	
C1778-83	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	6		IC1007	COJBAA0002331	IC	1	
C1784-86	F1H0J2250008	C. CAPACITOR CH6. 3V 2. 2U	3		IC1100	C1AB00002377	IC	1	
C1787	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC1101	COCBCAC00072	IC	1	
C1788	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC1102, 03	COJBAA000333	IC	2	
C1789	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC1104	CODBAYY00805	IC	1	
C1793	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC1300-04	C3ABRY000032	IC	5	
C1794	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC1400	C2GBC0000354	IC	1	
C1795	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC1402, 03	TVHC126FT	IC	2	
C1796	F1H1A4750004	C. CAPACITOR CH 10V 4. 7U	1		IC1500, 01	C3ABT6000007	IC	2	
C1797	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	1		IC1600	COJBAA000374	IC	1	
C1900, 01	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2		IC1601	COJBAA000321	IC	1	
C1903	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC1700	CODBZGG00060	IC	1	
C1907	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	1		IC1702	CODBAYY00803	IC	1	
C1908, 09	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	2		IC1900	C1ZBZ0004108	IC	1	
C1910, 11	F1H0J1060006	C. CAPACITOR CH6. 3V 10U	2		IC1901	COCBCAC00061	IC	1	
C1912	F1G0J1050007	C. CAPACITOR CH6. 3V 1U	1		IC1902	COJBAA002192	IC	1	
C1913, 14	F1G1E1030005	C. CAPACITOR CH 25V 0. 01U	2		IC1903	COJBAD000207	IC	1	
C1915, 16	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2		IC1904	COJBAA002192	IC	1	
C1917, 18	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		IC1905	COJBAA000374	IC	1	
C1919-21	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	3		IC1906	COCBCBC00048	IC	1	
C1922-24	F1G1H101A565	C. CAPACITOR CH 50V 100P	3						
C1925, 26	F1G1E1030005	C. CAPACITOR CH 25V 0. 01U	2		IP500	VEF0139B	IC	1	
C1927, 28	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2		IP501	VEF0140B	IC	1	
C1929, 30	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		IP502	C3EBGG000016	IC	1	
					IP1600	VEF0138B	IC	1	
CN1	K1KYG0B00001	CONNECTOR	1						
CN2	K1MR70B00004	CONNECTOR	1		L300-04	JOJCC0000405	FERRITE CORE	5	
CN3	K1KYC0BA0274	CONNECTOR	1		L306, 07	JOJEC0000012	FILTER	2	
CN4	K1KYC0AA0842	CONNECTOR	1		L309-11	JOJCC0000405	FERRITE CORE	3	
CN100	K1KB70A00051	CONNECTOR (FEMALE)	1		L312, 13	JOJEC0000012	FILTER	2	
					L314	JOMAB0000225	FILTER	1	
D100, 01	D4ED1270A008	VARIATOR	2		L315, 16	JOJCC0000405	FERRITE CORE	2	
D500, 01	DA3J101F0L	DIODE	2		L400-02	JOJCC0000405	FERRITE CORE	3	
					L403	JOMAB0000225	FILTER	1	
FL300-09	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	10		L500	JOJCC0000405	FERRITE CORE	1	
FL400-02	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	3		L501, 02	JOJHC0000032	FILTER	2	
FL700-10	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	11		L700	JOJCC0000009	FILTER	1	
FL900, 01	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	2		L701	JOJCC0000405	FERRITE CORE	1	
FL1000-03	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	4		L702-05	JOJHC0000032	FILTER	4	
FL1100-04	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	5		L706-08	JOJCC0000009	FILTER	3	
FL1400-02	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	3		L709-12	JOJHC0000032	FILTER	4	
FL1500-02	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	3		L713, 14	JOJCC0000405	FERRITE CORE	2	
FL1600, 01	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	2		L715	G1C4R7MA0249	COIL 4. 7UH	1	
FL1700-10	F1H0J4740004	C. CAPACITOR CH6. 3V 0. 47U	11		L900, 01	JOJHC0000032	FILTER	2	
					L1000, 01	JOJHC0000032	FILTER	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L1002	G1C120JA0036	COIL 12UH	1		R425	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
L1003-05	JOJCC00000405	FERRITE CORE	3		R426-30	EXBN8V470J	COMBI. R-R	47	5
L1100	JOJHC00000032	FILTER	1		R431-40	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	10	
L1101	JOJHC00000009	FILTER	1		R441-44	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	4	
L1102, 03	JOJHC00000032	FILTER	2		R445	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
L1104	JOJCC00000405	FERRITE CORE	1		R446	ERJ2RHD301	M. RESISTOR CH 1/16W 300	1	
L1105	JOJHC00000032	FILTER	1		R447	ERJ6RED510	M. RESISTOR CH 1/10W 51	1	
L1106, 07	JOJCC00000405	FERRITE CORE	2		R448-50	EXBN8V470J	COMBI. R-R	47	3
L1108	G1C4R7MA0249	COIL 4.7UH	1		R451	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
L1300-04	JOJHC00000032	FILTER	5		R452	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
L1400	JOJEC00000012	FILTER	1		R453	ERJ6RED220	M. RESISTOR CH 1/10W 22	1	
L1500-02	JOJHC00000032	FILTER	3		R454	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
L1700-03	JOJHC00000032	FILTER	4		R455-64	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	10	
L1704	JOJHC00000009	FILTER	1		R465	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
L1705-08	JOJHC00000032	FILTER	4		R466	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
L1709, 10	JOJHC00000009	FILTER	2		R467, 68	EXBN8V560J	COMBI. R-R	56	2
L1712	G1C4R7MA0249	COIL 4.7UH	1		R469, 70	EXBN8V222J	COMBI. R-R	22	2
L1901	JOJHC00000032	FILTER	1		R471, 72	EXBN8V560J	COMBI. R-R	56	2
L1902-07	JOJCC00000405	FERRITE CORE	6		R473, 74	EXBN8V222J	COMBI. R-R	22	2
					R475, 76	EXBN8V560J	COMBI. R-R	56	2
Q200	DRC9144E0L	TRANSISTOR	1		R477, 78	EXBN8V222J	COMBI. R-R	22	2
Q500, 01	DRA9114T0L	TRANSISTOR	2		R479	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
Q502-04	DRC9144E0L	TRANSISTOR	3		R480, 81	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
Q505	DRC9114T0L	TRANSISTOR	1		R482-86	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	5	
Q700	DRC9114Y0L	TRANSISTOR	1		R487, 88	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
Q701	B1DFCG000012	TRANSISTOR	1		R500	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
					R501	EXBN8V103J	COMBI. R-R	10K	1
R1-R8	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	8		R502	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R10	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R503, 04	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R12	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R505	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R100	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R506	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R101-04	EXBN8V330J	COMBI. R-R	33	4	R507, 08	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R111, 12	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		R509	EXBN8V103J	COMBI. R-R	10K	1
R113, 14	EXBN8V330J	COMBI. R-R	33	2	R510, 11	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R115	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R512, 13	EXBN8V103J	COMBI. R-R	10K	2
R203	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		R514	EXBN8V102J	COMBI. R-R	1K	1
R204	EXBN8V473J	COMBI. R-R	47K	1	R515	EXBN8V103J	COMBI. R-R	10K	1
R205	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R516	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R207	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R517, 18	EXBN8V103J	COMBI. R-R	10K	2
R215	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R519	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R216, 17	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		R520	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R219	ERJ2GEJ750	M. RESISTOR CH 1/16W 75	1		R521	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R221, 22	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2		R524-26	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	3	
R225	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R527	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R300	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R528	ERJ2RHD471	M. RESISTOR CH 1/16W 470	1	
R301	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R529	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R302	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R531	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R303, 04	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		R532	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R307	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R533	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R308	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R534	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R309-11	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	3		R535-38	ERJ2RHD101	M. RESISTOR CH 1/16W 100	4	
R312	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R539, 40	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R313-16	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	4		R541	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R317	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R542	EXBN8V103J	COMBI. R-R	10K	1
R320-22	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	3		R543	EXBN8V470J	COMBI. R-R	47	1
R323	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R544, 45	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2	
R325-28	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	4		R546-50	EXBN8V330J	COMBI. R-R	33	5
R330, 31	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		R551-56	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	6	
R332	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R559	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R333, 34	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		R560	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	1	
R335	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R561-64	EXBN8V222J	COMBI. R-R	22	4
R336, 37	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	2		R565	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R338	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R567, 68	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R339	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R569	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R340	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R570	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R341, 42	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		R572-74	ERJ2RHD101	M. RESISTOR CH 1/16W 100	3	
R343	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R575-78	EXBN8V222J	COMBI. R-R	22	4
R344	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R579-82	EXBN8V470J	COMBI. R-R	47	4
R345	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R584	EXBN8V103J	COMBI. R-R	10K	1
R347	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R585, 86	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R400	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1		R588	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R401	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R589	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R402	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R590	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R403-10	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	8		R591-93	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	3	
R411-15	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	5		R594-98	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	5	
R416	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R599, 00	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R417-24	EXBN8V222J	COMBI. R-R	22	8	R601	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R603	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1211	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
R606	EXBN8V470J	COMBI. R-R	47	1	R1212-14	EXBN8V222J	COMBI. R-R	22	3
R607	EXBN8V103J	COMBI. R-R	10K	1	R1216	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R608, 09	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R1217-27	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	11	
R610	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R1228-31	EXBN8V222J	COMBI. R-R	22	4
R611, 12	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R1232	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
R613, 14	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R1233	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R702	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1234	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R703	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1235	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R706, 07	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R1236, 37	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R708	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1238	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R709	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R1239	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R710	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1240-48	EXBN8V330J	COMBI. R-R	33	9
R712-14	EXBN8V101J	COMBI. R-R	100	3	R1249	EXBN8V222J	COMBI. R-R	22	1
R715	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R1250-52	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	
R716	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R1300-15	EXBN8V330J	COMBI. R-R	33	16
R717	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1400	EXBN8V102J	COMBI. R-R	1K	1
R718	ERJ2RHD332	M. RESISTOR CH 1/16W 3.3K	1		R1401	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R719	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1		R1402	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
R720	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1403, 04	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
R722	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1405	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R724	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1406-13	EXBN8V470J	COMBI. R-R	47	8
R900-03	EXBN8V470J	COMBI. R-R	47	4	R1414	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R904	ERJ3GEYJ201	M. RESISTOR CH 1/16W 200	1		R1415	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R905-08	EXBN8V470J	COMBI. R-R	47	4	R1416	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R909	ERJ3GEYJ201	M. RESISTOR CH 1/16W 200	1		R1418	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R910-13	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	4		R1419	ERJ2GEJ750	M. RESISTOR CH 1/16W 75	1	
R918	ERJ3GEYJ201	M. RESISTOR CH 1/16W 200	1		R1420	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R923	ERJ3GEYJ201	M. RESISTOR CH 1/16W 200	1		R1421, 22	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R924-27	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	4		R1423	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R1000	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R1424	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1002-04	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	3		R1425	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
R1005	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1		R1427	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R1006, 07	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R1428	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1008	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1		R1429	EXBN8V470J	COMBI. R-R	47	1
R1009	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1430, 31	EXBN8V222J	COMBI. R-R	22	2
R1010	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1432, 33	EXBN8V472J	COMBI. R-R	4.7K	2
R1011	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		R1434	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R1012, 13	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2		R1436, 37	EXBN8V472J	COMBI. R-R	4.7K	2
R1014	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R1438	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R1015, 16	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	2		R1439, 40	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
R1017	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1		R1443	ERJ2GEJ201	M. RESISTOR CH 1/10W 200	1	
R1019-22	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	4		R1444	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R1026	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1445	D1H8R0040001	COMBI. R-R	0	1
R1027-29	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	3		R1447, 48	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R1030, 31	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2		R1449, 50	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R1100	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1451	EXBN8V102J	COMBI. R-R	1K	1
R1102	EXBN8V222J	COMBI. R-R	22	1	R1453	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1105	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1458-61	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	4	
R1112	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1463	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
R1113, 14	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1464	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1116	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R1465	ERJ2RHD822	M. RESISTOR CH 1/16W 8.2K	1	
R1117	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1466	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1	
R1118-20	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3		R1467	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R1121	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R1468	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R1122	EXBN8V222J	COMBI. R-R	22	1	R1470-72	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	3	
R1123	ERJ2RHD471	M. RESISTOR CH 1/16W 470	1		R1475	EXBN8V102J	COMBI. R-R	1K	1
R1124-33	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	10		R1476	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R1134	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1477	EXBN8V102J	COMBI. R-R	1K	1
R1135-37	EXBN8V222J	COMBI. R-R	22	3	R1478	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R1138-41	EXBN8V680J	COMBI. R-R	68	4	R1479	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1142	EXBN8V222J	COMBI. R-R	22	1	R1480-84	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	5	
R1144-46	EXBN8V103J	COMBI. R-R	10K	3	R1485	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R1147	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R1486	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R1148	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1487	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R1150	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1488	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
R1151	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1		R1489, 90	EXBN8V101J	COMBI. R-R	100	2
R1152-54	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3		R1491	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R1155, 56	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	2		R1494, 95	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	2	
R1200	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1500-02	ERJ2RHD101	M. RESISTOR CH 1/16W 100	3	
R1201, 02	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1503, 04	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
R1203	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1505, 06	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R1204	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1507-14	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	8	
R1205	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R1515	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R1206	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1		R1516, 17	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	2	
R1207, 08	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R1518, 19	ERJ2GEJ201	M. RESISTOR CH 1/10W 200	2	
R1209, 10	EXBN8V330J	COMBI. R-R	33	2	R1520-22	ERJ2RHD101	M. RESISTOR CH 1/16W 100	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1523-26	EXBN8V680J	COMBI. R-R	68	4
R1529-31	EXBN8V680J	COMBI. R-R	68	3
R1532	ERJ2GEJ680	M. RESISTOR CH 1/16W	68	1
R1533	ERJ3GEYJ201	M. RESISTOR CH 1/16W	200	1
R1536	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1537-40	EXBN8V680J	COMBI. R-R	68	4
R1541	ERJ3GEYJ201	M. RESISTOR CH 1/16W	200	1
R1542	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1543	ERJ2RHD102	M. RESISTOR CH 1/16W	1K	1
R1600	EXBN8V472J	COMBI. R-R	4. 7K	1
R1601	ERJ2RHD101	M. RESISTOR CH 1/16W	100	1
R1602	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1603	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	1
R1604	ERJ2RHD101	M. RESISTOR CH 1/16W	100	1
R1606	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1607	ERJ2RHD101	M. RESISTOR CH 1/16W	100	1
R1608	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	1
R1609-11	ERJ2RHD101	M. RESISTOR CH 1/16W	100	3
R1612	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1613	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1614	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1615	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1616	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1617	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1618	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1620	EXBN8V472J	COMBI. R-R	4. 7K	1
R1622	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1626	EXBN8V750J	COMBI. R-R	75	1
R1631	ERJ2GEJ560	M. RESISTOR CH 1/16W	56	1
R1632	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	1
R1633, 34	ERJ2GEJ560	M. RESISTOR CH 1/16W	56	2
R1635-40	EXBN8V560J	COMBI. R-R	56	6
R1641	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1642, 43	ERJ2RHD473	M. RESISTOR CH 1/16W	47K	2
R1644	ERJ2RHD102	M. RESISTOR CH 1/16W	1K	1
R1645	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1647	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1648	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1650	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1651, 52	EXBN8V750J	COMBI. R-R	75	2
R1653-55	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	3
R1656, 57	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	2
R1658-63	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	6
R1664, 65	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	2
R1666-69	EXBN8V470J	COMBI. R-R	47	4
R1670	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1671	EXBN8V472J	COMBI. R-R	4. 7K	1
R1672	ERJ2RHD473	M. RESISTOR CH 1/16W	47K	1
R1673, 74	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	2
R1675, 76	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	2
R1680	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	1
R1682	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
R1685	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1688	ERJ2RHD102	M. RESISTOR CH 1/16W	1K	1
R1689	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	1
R1694, 95	ERJ2GEJ750	M. RESISTOR CH 1/16W	75	2
R1696, 97	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	2
R1702	ERJ2RHD332	M. RESISTOR CH 1/16W	3. 3K	1
R1703	ERJ2RHD122	M. RESISTOR CH 1/16W	1. 2K	1
R1704	ERJ2RHD103	M. RESISTOR CH 1/16W	10K	1
R1705-07	ERJ3GEYJ100	M. RESISTOR CH 1/16W	10	3
R1901, 02	ERJ2RHD103	M. RESISTOR CH 1/16W	10K	2
R1903	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K	1
R1907	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1908	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1910, 11	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	2
R1915	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1916-19	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	4
R1920	ERJ2RHD103	M. RESISTOR CH 1/16W	10K	1
R1923	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1924-26	ERJ2RHD102	M. RESISTOR CH 1/16W	1K	3
R1927	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1929	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1933	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1934, 35	EXBN8V470J	COMBI. R-R	47	2
R1936	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
R1937, 38	EXBN8V470J	COMBI. R-R	47	2

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1939-42	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	4
R1943-61	ERJ2RHD101	M. RESISTOR CH 1/16W	100	19
R1962-66	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	5
R1967	ERJ2GEOR00	M. RESISTOR CH 1/16W	0	1
R1969, 70	EXBN8V470J	COMBI. R-R	47	2
R1974, 75	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	2
R1976, 77	ERJ2RHD473	M. RESISTOR CH 1/16W	47K	2
R1979, 80	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	2
R1983	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
X300	HOJ330500012	CRYSTAL OSCILLATOR		1
X1100	HOJ180500015	CRYSTAL OSCILLATOR		1
X1400	HOJ240500056	CRYSTAL OSCILLATOR		1
ZA1-A3	K4CD01000015	TERMINAL		3
ZA4-A8	K4CD01000010	TERMINAL		5
		MISCELLANEOUS		
	VMP9851	PROXY PCB ANGLE		1
	XYN26+J6FJ	SCREW		1
■ E7	VEP80E89A	INT CONNECT P. C. BOARD		1 (RTL)
C1-C5	F1H1H104A220	C. CAPACITOR CH 50V 0. 1U		5
CN1, N2	K1KYCOAA0838	CONNECTOR		2
CN3	K1MN40B00048	CONNECTOR		1
CN4	K1KA03B00139	CONNECTOR (MALE)		1
CN5	K1KA12B00109	CONNECTOR (MALE)		1
R1, R2	ERJ3GEYOR00	M. RESISTOR CH 1/16W	0	2
ZA1	K4AD01Z00005	TERMINAL		1
ZA2	K4CD01000015	TERMINAL		1
■ E8	VEP23695A	DRIVE P. C. BOARD		1 (RTL)
C2	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		1
C3	F3H1D336A053	T. CAPACITOR CH 20V 33U		1
C4	F3H1C476A097	T. CAPACITOR CH 16V 47U		1
C5	F3H1D336A053	T. CAPACITOR CH 20V 33U		1
C6	F2A1C222B121	E. CAPACITOR 16V 2200U		1
C7	F2A1E471A796	E. CAPACITOR 25V 470U		1
C8	F3G1A226A012	T. CAPACITOR CH 10V 22U		1
C9	VCEA1AAP221	E. CAPACITOR 10V 220U		1
C10	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		1
C12	F3F1C225A015	T. CAPACITOR CH 16V 2. 2U		1
C13	F1H1H102A831	C. CAPACITOR CH 50V 1000P		1
C15-17	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		3
C18	F2D1D4700003	E. CAPACITOR 20V 47U		1
C19	F1H1H102A831	C. CAPACITOR CH 50V 1000P		1
C21	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		1
C22	F2D1D4700003	E. CAPACITOR 20V 47U		1
C25	F1H1H102A831	C. CAPACITOR CH 50V 1000P		1
C27	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		1
C28	F2A1H100B058	E. CAPACITOR 50V 10U		1
C35	F1H1H102A831	C. CAPACITOR CH 50V 1000P		1
C36-38	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		3
C39	F2D1D1010002	E. CAPACITOR 20V 100U		1
C40	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		1
C42, 43	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		2
C45, 46	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		2
C48, 49	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		2
C51	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		1
C52-57	F1J1E105A171	C. CAPACITOR CH 25V 1U		6
C58-61	F1H1H104A783	C. CAPACITOR CH 50V 0. 1U		4

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C62	F3F1E155A010	T. CAPACITOR CH 25V 1.5U	1		R12	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
C63	F3G1D685A008	T. CAPACITOR CH 35V 6.8U	1		R13	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
C64-76	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	13		R16	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
C77	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		R17	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1	
C78	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		R18	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1	
C79	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		R19	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
C80-89	F1H1H102A831	C. CAPACITOR CH 50V 1000P	10		R20	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
C92-95	F1H1H102A831	C. CAPACITOR CH 50V 1000P	4		R28	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
C96	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		R30	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
C97	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1		R31	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
C99,00	F1H1H102A831	C. CAPACITOR CH 50V 1000P	2		R32	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
C101	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		R33-40	ERJ6BQFR56	M. RESISTOR CH 1/10W 0.56	8	
C102	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		R41-43	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	3	
C103	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		R44	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
C104	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		R45	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
C105	F1K1E1060001	C. CAPACITOR CH 25V 10U	1		R46-48	ERJ3RBD101	M. RESISTOR CH 1/16W 100	3	
C106	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		R49	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
					R50	ERJ3RBD203	M. RESISTOR CH 1/16W 20K	1	
CN1	K1MY16B00001	CONNECTOR	1		R51	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
CN2	K1KB60A00147	CONNECTOR (FEMALE)	1		R52	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
CN3	K1KA50A00203	CONNECTOR (MALE)	1		R53	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
					R54	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
D1, D2	DZ2J120MOL	DIODE	2		R55	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1	
D5	DZ2J120MOL	DIODE	1		R56	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
D7	DZ2J075MOL	DIODE	1		R58	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	1	
D8	DA6X101KOR	DIODE	1		R59	ERJ3RBD243	M. RESISTOR CH 1/16W 24K	1	
					R60	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC1	C0DBZFA00020	IC	1		R61	ERJ3RBD133	M. RESISTOR CH 1/16W 13K	1	
IC2	C0CABAC00060	IC	1		R62	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1	
IC3	COABFB000009	IC	1		R63	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC4	COABEB000023	IC	1		R64	ERJ3RBD133	M. RESISTOR CH 1/16W 13K	1	
IC5, C6	C1AB00002039	IC	2		R65	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1	
IC7	COEBY0000582	IC	1		R66	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC8	COABFB000009	IC	1		R67	ERJ3RBD133	M. RESISTOR CH 1/16W 13K	1	
IC9	COABCA000017	IC	1		R68	ERJ3RBD333	M. RESISTOR CH 1/16W 33K	1	
IC10	COFBBD000137	IC	1		R69	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
					R70	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1	
L1-L5	JOJ.KC0000009	FILTER	5		R71	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
L7, L8	JOJ.KC0000009	FILTER	2		R72	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1	
L9	ERJ6GEYOR00	M. RESISTOR CH 1/10W	0		R73	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1	
L10	JOJ.KC0000009	FILTER	1		R74	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
					R75	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
Q1, Q2	DSA750400L	TRANSISTOR	2		R76	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1	
Q5	DSA750400L	TRANSISTOR	1		R77	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1	
Q7	DSC7505ROL	TRANSISTOR	1		R78	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
Q8	B1BBCE000003	TRANSISTOR	1		R79	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
Q9	B1BDBE000007	TRANSISTOR	1		R80	ERJ3RBD513	M. RESISTOR CH 1/16W 51K	1	
Q10	B1BBCE000003	TRANSISTOR	1		R81-83	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	3	
Q11	B1BDBE000007	TRANSISTOR	1		R84-86	ERJ3RBD101	M. RESISTOR CH 1/16W 100	3	
Q12	B1BBCE000003	TRANSISTOR	1		R87	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	1	
Q13	B1BDBE000007	TRANSISTOR	1		R88	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
Q14	B1BBCE000003	TRANSISTOR	1		R89, 90	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	2	
Q15	B1BDBE000007	TRANSISTOR	1		R91	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
Q16	B1BBCE000003	TRANSISTOR	1		R92	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
Q17	B1BDBE000007	TRANSISTOR	1		R93-98	EXB24V224J	COMBI. R-R 220K	6	
Q18	B1BBCE000003	TRANSISTOR	1		R99	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
Q19	B1BDBE000007	TRANSISTOR	1		R101	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
Q20	B1BBCE000003	TRANSISTOR	1						
Q21	B1BDBE000007	TRANSISTOR	1		TP1	EYF6CU	TEST POINT	1	
Q22	B1BBCE000003	TRANSISTOR	1						
Q23	B1BDBE000007	TRANSISTOR	1		ZA1-A4	K4CD01000015	TERMINAL	4	
Q24	DSC500100L	TRANSISTOR	1						
Q25	DSA500100L	TRANSISTOR	1						
Q26	DSC500100L	TRANSISTOR	1						
Q27	DSA500100L	TRANSISTOR	1						
Q28	DSC500100L	TRANSISTOR	1						
Q29	DSA500100L	TRANSISTOR	1		■ E9	VEP23696A	PULSE AD P. C. BOARD	1 (RTL)	
R2	ERJ6GEYOR00	M. RESISTOR CH 1/10W	0		C1	F3G1A336A012	T. CAPACITOR CH 10V 33U	1	
R3	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	1		C2	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R4	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		C3	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1	
R5	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		C4	F3F1A106A011	T. CAPACITOR CH 10V 10U	1	
R6	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1		C5	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R7	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C7, C8	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R8, R9	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	2		C10, 11	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R10	ERJ3RBD623	M. RESISTOR CH 1/16W 62K	1		C12	F3F1C475A015	T. CAPACITOR CH 16V 4.7U	1	
R11	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1						

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C13	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C224-27	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4	
C14	VCEA0JAP470	C. CAPACITOR 6.3V 47P	1		C228-31	F1H1H1010005	C. CAPACITOR CH 50V 100P	4	
C15	F1H1H680A831	C. CAPACITOR CH 50V 68P	1		C232-35	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4	
C16	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C236-39	F1H1H1010005	C. CAPACITOR CH 50V 100P	4	
C17	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C240-43	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4	
C19	F3H1C476A097	T. CAPACITOR CH 16V 47U	1		C245	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C20	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C246	F1H1H103A220	C. CAPACITOR CH 50V 0.01U	1	
C21	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C247-49	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3	
C22	F3H1A4760016	T. CAPACITOR CH 10V 47U	1		C254	F3F1C475A015	T. CAPACITOR CH 16V 4.7U	1	
C23	VCEA1AAP221	E. CAPACITOR 10V 220U	1		C255	F3G1C106A009	T. CAPACITOR CH 16V 10U	1	
C24-28	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	5		C256-59	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4	
C31, 32	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C260	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
C33, 34	F1G1H101A565	C. CAPACITOR CH 50V 100P	2		C261-63	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3	
C35	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C264	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
C36	F3H1A4760016	T. CAPACITOR CH 10V 47U	1		C265-68	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4	
C37	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C301, 02	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C38, 39	F1H1H5600007	C. CAPACITOR CH 50V 56P	2		C305, 06	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C40	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C311-16	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	6	
C41	F3H1C476A097	T. CAPACITOR CH 16V 47U	1		C317-19	F1K1A106A007	C. CAPACITOR CH 50V 33P	3	
C42	F2D0J221A010	E. CAPACITOR 6.3V 220U	1		C320-22	F1G1H101A565	C. CAPACITOR CH 50V 100P	3	
C43	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C323-25	F1K1A106A007	C. CAPACITOR CH 50V 33P	3	
C44	F3H1A4760016	T. CAPACITOR CH 10V 47U	1		C329-34	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	6	
C45	F2D1A1010003	E. CAPACITOR 10V 100U	1		C335-37	F1G1H101A565	C. CAPACITOR CH 50V 100P	3	
C46	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C341-43	F1H1C105A118	C. CAPACITOR CH 16V 1U	3	
C47	F1H1H4700006	C. CAPACITOR CH 50V 47P	1		C350-55	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	6	
C48-50	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3		C356-61	F1G1H101A565	C. CAPACITOR CH 50V 100P	6	
C52	F3G1A336A012	T. CAPACITOR CH 10V 33U	1		C362-64	F1G1H105A565	C. CAPACITOR CH 50V 15P	3	
C53, 54	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C365, 66	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
C55	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		C367	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C56	F3F1A106A011	T. CAPACITOR CH 10V 10U	1		C368	F1J1A225A003	C. CAPACITOR CH 10V 2.2M	1	
C58	ECU1C103JB5	P. CAPACITOR 16V 0.01U	1		C369-71	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C59	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C372	F1J0J106A014	T. CAPACITOR CH6.3V 10U	1	
C60	F3F1A106A011	T. CAPACITOR CH 10V 10U	1		C373	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C61	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C374	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C62	F3G1A336A012	T. CAPACITOR CH 10V 33U	1		C375	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C63	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C377, 78	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C64	ECU1H682JB	P. CAPACITOR 50V 6800P	1		C379	F1J0J106A014	T. CAPACITOR CH6.3V 10U	1	
C65	F3H1C336A018	T. CAPACITOR CH 16V 33U	1		C380	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
C66, 67	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C382, 83	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C68	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C501	F3H1C476A097	T. CAPACITOR CH 16V 47U	1	
C69	F3H1C336A018	T. CAPACITOR CH 16V 33U	1		C502	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C70	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C503-05	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
C71	F1H1H102A748	C. CAPACITOR CH 50V 1000P	1		C509, 10	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C72	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C511	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
C73	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1		C512	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C74	F3G1A336A012	T. CAPACITOR CH 10V 33U	1		C513, 14	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
C75	F3H1C336A018	T. CAPACITOR CH 16V 33U	1		C515, 16	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C76	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C518, 19	F1J0J106A014	T. CAPACITOR CH6.3V 10U	2	
C77	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C520	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C78	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C521-23	F1K1A106A007	C. CAPACITOR CH 50V 33P	3	
C79, 80	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C524, 25	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	2	
C81	F3G1A336A012	T. CAPACITOR CH 10V 33U	1		C526, 27	F1H1H102A831	C. CAPACITOR CH 50V 1000P	2	
C82	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C528, 29	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C84	F3G1A336A012	T. CAPACITOR CH 10V 33U	1		C530, 31	F1K1A106A007	C. CAPACITOR CH 50V 33P	2	
C85	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C532-48	F1H1H102A831	C. CAPACITOR CH 50V 1000P	17	
C86	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		C549, 50	F1H1H1010005	C. CAPACITOR CH 50V 100P	2	
C87, 88	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C551-61	F1H1H102A831	C. CAPACITOR CH 50V 1000P	11	
C89	F3H1C336A018	T. CAPACITOR CH 16V 33U	1		C562, 63	F1H1H1010005	C. CAPACITOR CH 50V 100P	2	
C90	F1G1H101A565	C. CAPACITOR CH 50V 100P	1		C564-71	F1H1H102A831	C. CAPACITOR CH 50V 1000P	8	
C91	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C573	F3F1A106A011	T. CAPACITOR CH 10V 10U	1	
C92	F1H1H102A748	C. CAPACITOR CH 50V 1000P	1		C574	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C93	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1						
C94	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		CN100	K1MY10B00002	CONNECTOR	1	
C95-97	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3		CN200	K1KA08BA0081	CONNECTOR (MALE)	1	
C98	F3G1A336A012	T. CAPACITOR CH 10V 33U	1		CN400	K1KB60BA0014	CONNECTOR (FEMALE)	1	
C99	F1H1H390A831	C. CAPACITOR CH 50V 39P	1		CN401	K1MY14B00001	CONNECTOR	1	
C200-03	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4		CN403	K1KB60BA0014	CONNECTOR (FEMALE)	1	
C204-07	F1H1H1010005	C. CAPACITOR CH 50V 100P	4		CN404	K1KY50AA0747	CONNECTOR	1	
C208	F1J0J106A014	T. CAPACITOR CH6.3V 10U	1						
C209	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1		D100	DA3J101K0L	D1ODE	1	
C210	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		D101-03	DZ2J02400L	D1ODE	3	
C211	F1H1A105A028	C. CAPACITOR CH 10V 1U	1		D104	DZ2J043M0L	D1ODE	1	
C212	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		D300-05	DA3J101F0L	D1ODE	6	
C213	F1J0J106A014	T. CAPACITOR CH6.3V 10U	1						
C214-17	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	4		FL100	J1ZDA0000012	DELAY LINE	1	
C218-21	F1H1H1010005	C. CAPACITOR CH 50V 100P	4		FL101	J1ZDA0000009	DELAY LINE	1	
C222, 23	F1J0J106A014	T. CAPACITOR CH6.3V 10U	2		FL102	J0MAB0000055	FILTER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
FL103	J1ZDA0000010	DELAY LINE	1		R4	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
FL104	J1ZDA0000011	DELAY LINE	1		R5	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
FL106	J0MAB0000055	FILTER	1		R6	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
FL302-04	J0E3715B0002	LCR FILTER	3		R7	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC101	COJBAM000045	IC	1		R8	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
IC102	TLC272CPW	IC	1		R9	ERJ3RBD203	M. RESISTOR CH 1/16W 20K	1	
IC103	COJBAZ002478	IC	1		R12, 13	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	2	
IC104	C0DBZFA00020	IC	1		R14	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
IC105, 06	COABEB000023	IC	2		R15	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
IC107	COJBFA000224	IC	1		R16	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
IC108	C0CBABD00015	IC	1		R17	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
IC110	COABGA000007	IC	1		R18	ERJ3RBD821	M. RESISTOR CH 1/16W 820	1	
IC111	COJBAB000722	IC	1		R19	ERJ3RBD512	M. RESISTOR CH 1/16W 5.1K	1	
IC112, 13	C0DBEJC00002	IC	2		R20	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
IC114	COJBCC000117	IC	1		R21	ERJ3RBD393	M. RESISTOR CH 1/16W 39K	1	
IC115	COJBAA000374	IC	1		R22	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
IC116	COJBAC000342	IC	1		R23	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC117	COJBFA000224	IC	1		R24	ERJ3RBD683	M. RESISTOR CH 1/16W 68K	1	
IC118-22	COJBAA000374	IC	5		R25	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
IC123	COJBAA000345	IC	1		R27	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
IC201	C0FBBD000137	IC	1		R28	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
IC202	C0DBZFA00020	IC	1		R29	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC203	C0FBBG000057	IC	1		R30	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
IC204	COJBAA000362	IC	1		R31	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
IC205	COJBZA002192	IC	1		R32	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
IC206	COJBAA000362	IC	1		R33	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
IC207	C0EBE0000346	IC	1		R34	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
IC208	G1ZBZ0004239	IC	1		R36	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
IC209	COJBZA001591	IC	1		R37	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
IC210	C0CBABD00015	IC	1		R39	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1	
IC211	COZBZ0000992	IC	1		R40	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	1	
IC212	COJBZA001120	IC	1		R41	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
IC213	COJBZA002192	IC	1		R42	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC301-06	COABAB000102	IC	6		R43, 44	ERJ3RBD471	M. RESISTOR CH 1/16W 470	2	
IC310-12	COABBZ000029	IC	3		R45	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC313	C0FBAY000098	IC	1		R46, 47	ERJ3RBD471	M. RESISTOR CH 1/16W 470	2	
IC401	C0DBZFA00020	IC	1		R48	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
IC402	COABBA000063	IC	1		R49, 50	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
IC403	COJBAA000362	IC	1		R52	ERJ3RED105	M. RESISTOR CH 1/16W 1M	1	
IC404	C0DBZGG00060	IC	1		R53	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
IC405	C0FBBG000057	IC	1		R54	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	1	
IC406, 07	C1CB00002542	IC	2		R55	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1	
IC408	C0DBEJC00002	IC	1		R56, 57	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	2	
IC409	C0DBEED00001	IC	1		R58	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
IC500	COJBFA000625	IC	1		R59	ERJ3RBD433	M. RESISTOR CH 1/16W 43K	1	
L100	JOJBC00000019	FILTER	1		R63	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	1	
L101, 02	JOJKC00000099	FILTER	2		R64	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
L103	G1C100K00031	COIL 10UH	1		R65	ERJ3RBD622	M. RESISTOR CH 1/16W 6.2K	1	
L104, 05	JOJKC00000099	FILTER	2		R68, 69	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
L106-10	JOJBC00000019	FILTER	5		R70, 71	ERJ3RBD201	M. RESISTOR CH 1/16W 200	2	
L112	JOJBC00000019	FILTER	1		R73	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
L114	JOJBC00000019	FILTER	1		R74, 75	ERJ3RBD201	M. RESISTOR CH 1/16W 200	2	
L115	G1C100K00031	COIL 10UH	1		R76	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
L116, 17	JOJBC00000019	FILTER	2		R77	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
L118	G1C100K00031	COIL 10UH	1		R79	ERJ3RBD243	M. RESISTOR CH 1/16W 24K	1	
L119	JOJBC00000019	FILTER	1		R83	ERJ3RBD201	M. RESISTOR CH 1/16W 200	1	
L200-04	JOJHC00000032	FILTER	5		R85	ERJ3RBD511	M. RESISTOR CH 1/16W 510	1	
L205-11	JOJBC00000019	FILTER	7		R86	ERJ3GEYJ331	M. RESISTOR CH 1/16W 330	1	
L300, 01	JOJBC00000019	FILTER	2		R87	ERJ3RBD682	M. RESISTOR CH 1/16W 6.8K	1	
L400	J0MAB0000225	FILTER	1		R88	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1	
L401, 02	JOJCC00000119	FILTER	2		R89	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
L403, 04	JOJBC00000019	FILTER	2		R90	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
L405	J0MAB0000225	FILTER	1		R91, 92	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
L406-19	JOJBC00000019	FILTER	14		R93	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
L420	JOJCC00000078	FILTER	1		R95	ERJ3RBD243	M. RESISTOR CH 1/16W 24K	1	
L421, 22	JOJCC00000119	FILTER	2		R96	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
L423-29	JOJKC00000009	FILTER	7		R97	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
L500	JOJBC00000019	FILTER	1		R98	ERJ3RBD121	M. RESISTOR CH 1/16W 120	1	
Q100	DSA5G0100L	TRANSISTOR	1		R99-03	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	5	
Q101-04	DSA750400L	TRANSISTOR	4		R200-02	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3	
Q105-07	DR05124E0L	TRANSISTOR	3		R203	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R1, R2	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R204	ERJ2GEOR00	M. RESISTOR CH 1/16W 0	1	
R3	ERJ3RBD272	M. RESISTOR CH 1/16W 2.7K	1		R207	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
					R209-11	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	3	
					R212	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
					R213	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
					R215	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R216	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R523	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R217	ERJ3GEYJ220	M. RESISTOR CH 1/16W 22	1		R524	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R218, 19	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2		R525	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1	
R220, 21	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R526	ERJ3RBD431	M. RESISTOR CH 1/16W 430	1	
R223	ERJ3GEY6472	M. RESISTOR CH 1/16W 4.7K	1		R527-29	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R224-28	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	5		R531	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1	
R229	ERJ3GEY6472	M. RESISTOR CH 1/16W 4.7K	1		R532	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R232, 33	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	2		R533, 34	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R234	D1H810040003	COMBI. R-R	10	1	R535	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1	
R235-37	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3		R536	ERJ3RBD163	M. RESISTOR CH 1/16W 16K	1	
R238	D1H84734A008	COMBI. R-R	47K	1	R537	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1	
R239, 40	D1H810040003	COMBI. R-R	10	2	R538	ERJ3RBD473	M. RESISTOR CH 1/16W 47K	1	
R244	D1H810040003	COMBI. R-R	10	1	R539	EXB28VR000	COMBI. R-R	0	1
R246	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		R540	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R247	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1		R541	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
R248	EXB24V100J	COMBI. R-R	10	1	R543, 44	ERJ3RBD681	M. RESISTOR CH 1/16W 680	2	
R249	EXB24V103J	COMBI. R-R	10K	1	R546, 47	ERJ3RBD681	M. RESISTOR CH 1/16W 680	2	
R250	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1		R552	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1	
R251	D1H810040003	COMBI. R-R	10	1	R559	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R252	D1H84734A008	COMBI. R-R	47K	1					
R253	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		TP100, 01	EYF6CU	TEST POINT	2	
R254	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		TP400	EYF6CU	TEST POINT	1	
R255	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		TP402, 03	EYF6CU	TEST POINT	2	
R256-58	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3						
R329	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		X100	H1C1486B0003	CRYSTAL OSCILLATOR	1	
R330	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1		X101	H1C1486B0004	CRYSTAL OSCILLATOR	1	
R331	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1						
R332	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1		ZA400	K4CA01000018	TERMINAL	1	
R333	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		ZA401-03	K4CD01000015	TERMINAL	3	
R334	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1						
R335-40	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	6						
R341-43	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	3						
R344-46	ERJ3RBD151	M. RESISTOR CH 1/16W 150	3						
R347-49	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	3						
R350	ERJ3RED360	M. RESISTOR CH 1/16W 36	1		■ E10	VEP239697A	PRE AMP P. C. BOARD	1	(RTL)
R351	ERJ3RED510	M. RESISTOR CH 1/16W 51	1						
R352	ERJ3RED560	M. RESISTOR CH 1/16W 56	1						
R353	ERJ3RED360	M. RESISTOR CH 1/16W 36	1						
R354	ERJ3RED510	M. RESISTOR CH 1/16W 51	1		C1	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R355	ERJ3RED560	M. RESISTOR CH 1/16W 56	1		C2	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
R356	ERJ3RED360	M. RESISTOR CH 1/16W 36	1		C3	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	
R357	ERJ3RED510	M. RESISTOR CH 1/16W 51	1		C4	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R358	ERJ3RED560	M. RESISTOR CH 1/16W 56	1		C6, C7	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R359	ERJ3RBD113	M. RESISTOR CH 1/16W 11K	1		C8-10	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3	
R360	ERJ3RED364	M. RESISTOR CH 1/16W 360K	1		C11, 12	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	2	
R361	ERJ3RBD113	M. RESISTOR CH 1/16W 11K	1		C13, 14	F3H1C476A097	T. CAPACITOR CH 16V 47U	2	
R362	ERJ3RED364	M. RESISTOR CH 1/16W 360K	1		C15, 16	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R363	ERJ3RBD113	M. RESISTOR CH 1/16W 11K	1		C17, 18	EEFCD1B220R	E. CAPACITOR 12.5V 22U	2	
R364	ERJ3RED364	M. RESISTOR CH 1/16W 360K	1		C19-22	F1H1H102A831	C. CAPACITOR CH 50V 1000P	4	
R365-67	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	3		C101-09	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	9	
R368-70	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	3		C110	F3H1V106A075	T. CAPACITOR CH 35V 10U	1	
R371-73	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	3		C111, 12	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R374-76	ERJ3RED124	M. RESISTOR CH 1/16W 120K	3		C113	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
R377-79	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	3		C114	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1	
R383-97	ERJ3RBD751	M. RESISTOR CH 1/16W 750	15		C115	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	
R401-09	ERJ3RBD751	M. RESISTOR CH 1/16W 750	9		C116	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
R410-15	ERJ3RED330	M. RESISTOR CH 1/16W 33	6		C117	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R418	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1		C118, 19	F3F1C475A015	T. CAPACITOR CH 16V 4.7U	2	
R422	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1		C120	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R426	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1		C121	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1	
R428, 29	EXB28VR000	COMBI. R-R	0	2	C122, 23	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R434, 35	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	2		C124	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1	
R436, 37	EXB28VR000	COMBI. R-R	0	2	C125	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	
R442-44	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3		C126	ECHU1C104J	P. CAPACITOR 16V 0.1U	1	
R500	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1		C127	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R501-03	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	3		C128	F1H1H3R0A508	C. CAPACITOR CH 50V 3P	1	
R504, 05	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		C129, 30	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
R506	ERJ3RBD182	M. RESISTOR CH 1/16W 1.8K	1		C131	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
R507	ERJ3RBD302	M. RESISTOR CH 1/16W 3K	1		C133	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
R508	ERJ3RBD201	M. RESISTOR CH 1/16W 200	1		C135	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R510-12	ERJ3RBD182	M. RESISTOR CH 1/16W 1.8K	3		C138	F1K1H103A126	C. CAPACITOR CH 50V 0.01U	1	
R514	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C139	F1H1H2200008	C. CAPACITOR CH 50V 22P	1	
R515	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1		C140	F3F1V105A014	T. CAPACITOR CH 35V 1U	1	
R517	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1		C141	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R518	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		C142	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
R519, 20	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2		C143	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
R521, 22	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	2		C144	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
					C145	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C146	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C341	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C148	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C342	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
C150, 51	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C343	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C152	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		C344	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1	
C154, 55	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C345	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	
C156	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1		C346	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C158	F1H1H10A509	C. CAPACITOR CH 50V 1P	1		C348	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C159	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1		C350, 51	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C160, 61	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	2		C352	F1H1H1010005	C. CAPACITOR CH 50V 100P	1	
C162	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C354, 55	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2	
C163	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		C356	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1	
C164-66	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3		C358	F1H1H10A509	C. CAPACITOR CH 50V 1P	1	
C201-09	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	9		C359	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1	
C210	F3H1V106A075	T. CAPACITOR CH 35V 10U	1		C360, 61	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	2	
C211, 12	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		C362	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1	
C213	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		C363	ECHU1C104J	P. CAPACITOR 16V 0.1U	1	
C214	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1		C364-66	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3	
C215	F1H1H1010005	C. CAPACITOR CH 50V 100P	1						
C216	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		CN1	K1KB60A00147	CONNECTOR (FEMALE)	1	
C217	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		CN101	K1KA03A00150	CONNECTOR (MALE)	1	
C218, 19	F3F1C475A015	T. CAPACITOR CH 16V 4.7U	2		CN201	K1KA03A00150	CONNECTOR (MALE)	1	
C220	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		CN301	K1KA03A00150	CONNECTOR (MALE)	1	
C221	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1						
C222, 23	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		D1, D2	DZ2J02400L	DIODE	2	
C224	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1						
C225	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		FL101	J1ZDA0000013	DELAY LINE	1	
C226	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		FL102	JOE3715B0002	LCR FILTER	1	
C227	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		FL201	J1ZDA0000013	DELAY LINE	1	
C228	F1H1H3R0A508	C. CAPACITOR CH 50V 3P	1		FL202	JOE3715B0002	LCR FILTER	1	
C229, 30	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		FL301	J1ZDA0000013	DELAY LINE	1	
C231	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		FL302	JOE3715B0002	LCR FILTER	1	
C233	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1						
C235	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC1	COJBAA000374	IC	1	
C238	F1K1H103A126	C. CAPACITOR CH 50V 0.01U	1		IC2	C0DBZFA00020	IC	1	
C239	F1H1H2200008	C. CAPACITOR CH 50V 22P	1		IC3	COABEB000023	IC	1	
C240	F3F1V105A014	T. CAPACITOR CH 35V 1U	1		IC101-04	COABAB000102	IC	4	
C241	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC105	COJBAS000075	IC	1	
C242	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		IC106	COABAA000080	IC	1	
C243	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC107	C1ZBZ0003260	IC	1	
C244	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		IC108	COABAA000080	IC	1	
C245	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		IC109	COABEB000023	IC	1	
C246	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC110	TLC272CPW	IC	1	
C248	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC111	COABEB000023	IC	1	
C250, 51	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		IC112	COJBAR000432	IC	1	
C252	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		IC201-04	COABAB000102	IC	4	
C254, 55	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		IC205	COJBAS000075	IC	1	
C256	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1		IC206	COABAA000080	IC	1	
C258	F1H1H10A509	C. CAPACITOR CH 50V 1P	1		IC207	C1ZBZ0003260	IC	1	
C259	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1		IC208	COABAA000080	IC	1	
C260, 61	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	2		IC209	COABEB000023	IC	1	
C262	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC210	TLC272CPW	IC	1	
C263	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		IC211	COABEB000023	IC	1	
C264-66	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3		IC212	COJBAR000432	IC	1	
C301-09	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	9		IC301-04	COABAB000102	IC	4	
C310	F3H1V106A075	T. CAPACITOR CH 35V 10U	1		IC305	COJBAS000075	IC	1	
C311, 12	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		IC306	COABAA000080	IC	1	
C313	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		IC307	C1ZBZ0003260	IC	1	
C314	F1H1H102A831	C. CAPACITOR CH 50V 1000P	1		IC308	COABAA000080	IC	1	
C315	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		IC309	COABEB000023	IC	1	
C316	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		IC310	TLC272CPW	IC	1	
C317	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		IC311	COABEB000023	IC	1	
C318, 19	F3F1C475A015	T. CAPACITOR CH 16V 4.7U	2		IC312	COJBAR000432	IC	1	
C320	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1						
C321	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1		L1	JOJBC0000019	FILTER	1	
C322, 23	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		L2, L3	JOJKC0000009	FILTER	2	
C324	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1						
C325	F1H1H1010005	C. CAPACITOR CH 50V 100P	1		Q1	DSA750400L	TRANSISTOR	1	
C326	ECHU1C104J	P. CAPACITOR 16V 0.1U	1		Q2	DSC7505R0L	TRANSISTOR	1	
C327	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		Q101-04	B1ADBB000025	TRANSISTOR	4	
C328	F1H1H3R0A508	C. CAPACITOR CH 50V 3P	1		Q105	B1ABDB000034	TRANSISTOR	1	
C329, 30	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	2		Q106, 07	B1ADBB000025	TRANSISTOR	2	
C331	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		Q108	B1ABDB000034	TRANSISTOR	1	
C333	F3F1C685A015	T. CAPACITOR CH 16V 6.8U	1		Q109-11	B1ADBB000025	TRANSISTOR	3	
C335	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		Q112	B1ABDB000034	TRANSISTOR	1	
C338	F1K1H103A126	C. CAPACITOR CH 50V 0.01U	1		Q201-04	B1ADBB000025	TRANSISTOR	4	
C339	F1H1H1800004	C. CAPACITOR CH 50V 18P	1		Q205	B1ABDB000034	TRANSISTOR	1	
C340	F3F1V105A014	T. CAPACITOR CH 35V 1U	1		Q206, 07	B1ADBB000025	TRANSISTOR	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q208	B1ADB000034	TRANSISTOR	1		R162	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
Q209-11	B1ADB000025	TRANSISTOR	3		R164	ERJ3RBD132	M. RESISTOR CH 1/16W 1.3K	1	
Q212	B1ADB000034	TRANSISTOR	1		R165	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
Q301-04	B1ADB000025	TRANSISTOR	4		R166	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
Q305	B1ADB000034	TRANSISTOR	1		R167	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1	
Q306, 07	B1ADB000025	TRANSISTOR	2		R168	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
Q308	B1ADB000034	TRANSISTOR	1		R169	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	
Q309-11	B1ADB000025	TRANSISTOR	3		R170	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1	
Q312	B1ADB000034	TRANSISTOR	1		R172	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
					R175	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
R1, R2	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2		R176	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R3, R4	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	2		R177	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R5-R7	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	3		R179	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R8-10	ERJ3RBD393	M. RESISTOR CH 1/16W 39K	3		R180	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R11, 12	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	2		R181	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1	
R13, 14	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	2		R182	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
R15-17	ERJ3RBD243	M. RESISTOR CH 1/16W 24K	3		R183	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
R18	ERJ3GEYJ100	M. RESISTOR CH 1/16W 10	1		R184	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R19	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R185	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R20	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		R186	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1	
R21	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		R187, 88	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2	
R22	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R189	ERJ3RED510	M. RESISTOR CH 1/16W 51	1	
R23	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1		R190	ERJ6GEYG122	M. RESISTOR CH 1/10W 1.2K	1	
R24	ERJ3RBD752	M. RESISTOR CH 1/16W 7.5K	1		R201	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R25	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	1		R203	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R26	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		R204	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1	
R27, 28	ERJ3RBD153	M. RESISTOR CH 1/16W 15K	2		R205	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
R29-31	ERJ3RBD101	M. RESISTOR CH 1/16W 100	3		R206, 07	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	2	
R32, 33	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	2		R208	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1	
R34, 35	ERJ3GEYJ101	M. RESISTOR CH 1/16W 100	2		R209	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R101	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R210	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1	
R103	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R211	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R104	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1		R212	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1	
R105	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		R213, 14	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2	
R106, 07	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	2		R215	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1	
R108	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1		R216	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R109	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		R217	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1	
R110	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1		R218	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R111	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R219	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R112	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		R220	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1	
R113, 14	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		R221, 22	ERJ3RBD301	M. RESISTOR CH 1/16W 300	2	
R115	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1		R223	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R116	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R224, 25	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	2	
R117	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1		R226	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
R118	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R227	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1	
R119	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R228	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
R120	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1		R229	ERJ3RBD363	M. RESISTOR CH 1/16W 36K	1	
R121, 22	ERJ3RBD301	M. RESISTOR CH 1/16W 300	2		R233	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R123	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R234	G1CR10JA0020	COIL 0.1UH	1	
R124, 25	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	2		R235	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1	
R126	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		R236	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R127	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1		R237	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1	
R128	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1		R238	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R129	ERJ3RBD363	M. RESISTOR CH 1/16W 36K	1		R239	ERJ3RBD913	M. RESISTOR CH 1/16W 91K	1	
R133	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R240	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R134	G1CR10JA0020	COIL 0.1UH	1		R241	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1	
R135	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1		R242	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R136	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R244	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R137	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1		R246	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1	
R138	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R248	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1	
R139	ERJ3RBD753	M. RESISTOR CH 1/16W 75K	1		R249	ERJ3RBD681	M. RESISTOR CH 1/16W 680	1	
R140	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		R251	ERJ3RED510	M. RESISTOR CH 1/16W 51	1	
R141	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		R253, 54	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2	
R142	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R255	ERJ3RBD752	M. RESISTOR CH 1/16W 7.5K	1	
R144	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R256	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R146	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		R257	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
R148	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1		R258	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R149	ERJ3RBD681	M. RESISTOR CH 1/16W 680	1		R259	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
R151	ERJ3RED510	M. RESISTOR CH 1/16W 51	1		R260	ERJ3RBD302	M. RESISTOR CH 1/16W 3K	1	
R153, 54	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		R261	ERJ3GEYJ155	M. RESISTOR CH 1/16W 1.5M	1	
R155	ERJ3RBD752	M. RESISTOR CH 1/16W 7.5K	1		R262	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
R156	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R264	ERJ3RBD132	M. RESISTOR CH 1/16W 1.3K	1	
R157	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		R265	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R158	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R266	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R159	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		R267	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1	
R160	ERJ3RBD302	M. RESISTOR CH 1/16W 3K	1		R268	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1	
R161	ERJ3GEYJ155	M. RESISTOR CH 1/16W 1.5M	1		R269	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R270	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		R381	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1	
R272	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		R382	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
R275	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		R383	ERJ3RED100	M. RESISTOR CH 1/16W 10	1	
R276	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		R384	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1	
R277	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		R385	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1	
R279	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		R386	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1	
R280	ERJ3RBD821	M. RESISTOR CH 1/16W 820	1		R387, 88	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2	
R281	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1		R389	ERJ3RED510	M. RESISTOR CH 1/16W 51	1	
R282	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1		R390	ERJ6GEYG122	M. RESISTOR CH 1/10W 1.2K	1	
R283	ERJ3RED100	M. RESISTOR CH 1/16W 10	1						
R284	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		TP1-P3	EYF6CU	TEST POINT	3	
R285	ERJ3RBD152	M. RESISTOR CH 1/16W 1.5K	1		TP101	EYF6CU	TEST POINT	1	
R286	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1		TP201	EYF6CU	TEST POINT	1	
R287, 88	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		TP301	EYF6CU	TEST POINT	1	
R289	ERJ3RED510	M. RESISTOR CH 1/16W 51	1						
R290	ERJ6GEYG122	M. RESISTOR CH 1/10W 1.2K	1		ZA1-A4	K4CD01000015	TERMINAL	4	
R301	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1						
R303	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1						
R304	ERJ3RBD273	M. RESISTOR CH 1/16W 27K	1						
R305	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1						
R306, 07	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	2						
R308	ERJ3RBD183	M. RESISTOR CH 1/16W 18K	1		■ E11	VEP80E86A	P2 CARD P. C. BOARD	1 (RTL)	
R309	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1						
R310	ERJ3RBD392	M. RESISTOR CH 1/16W 3.9K	1						
R311	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C102	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R312	ERJ3RBD332	M. RESISTOR CH 1/16W 3.3K	1		C103	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R313, 14	ERJ3RBD101	M. RESISTOR CH 1/16W 100	2		C104	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R315	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1		C106	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R316	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C107	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R317	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1		C108	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R318	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C109	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R319	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C110	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R320	ERJ3RBD271	M. RESISTOR CH 1/16W 270	1		C111	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R321, 22	ERJ3RBD301	M. RESISTOR CH 1/16W 300	2		C112	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R323	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C113	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R324, 25	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	2		C117, 18	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
R326	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		C119	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R327	ERJ3RBD202	M. RESISTOR CH 1/16W 2K	1		C200	F2H1C1810001	E. CAPACITOR CH 16V 180U	1	
R328	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1		C201	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R329	ERJ3RBD363	M. RESISTOR CH 1/16W 36K	1		C202	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R333	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C203	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R334	G1CR10JA0020	COIL 0.1UH	1		C204	F1G1H101A565	C. CAPACITOR CH 50V 100P	1	
R335	ERJ3RBD151	M. RESISTOR CH 1/16W 150	1		C205	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R336	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C206, 07	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2	
R337	ERJ3RBD221	M. RESISTOR CH 1/16W 220	1		C208	F1G1A474A018	C. CAPACITOR CH 10V 0.47U	1	
R338	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C209	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R339	ERJ3RBD913	M. RESISTOR CH 1/16W 91K	1		C210	F1G1A474A018	C. CAPACITOR CH 10V 0.47U	1	
R340	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		C211	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R341	ERJ3RBD472	M. RESISTOR CH 1/16W 4.7K	1		C214	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R342	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C215	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R344	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C216, 17	F1G1H271A571	C. CAPACITOR CH 50V 270P	2	
R346	ERJ3RBD561	M. RESISTOR CH 1/16W 560	1		C218	F1G1H181A541	C. CAPACITOR CH 50V 180P	1	
R348	ERJ3RBD222	M. RESISTOR CH 1/16W 2.2K	1		C219	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R349	ERJ3RBD681	M. RESISTOR CH 1/16W 680	1		C220	F1G1H181A541	C. CAPACITOR CH 50V 180P	1	
R351	ERJ3RED510	M. RESISTOR CH 1/16W 51	1		C221	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R353, 54	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	2		C224	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R355	ERJ3RBD752	M. RESISTOR CH 1/16W 7.5K	1		C225	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R356	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C226, 27	F1G1H101A565	C. CAPACITOR CH 50V 100P	2	
R357	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		C228	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R358	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C231-33	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	3	
R359	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		C234, 35	F1G1H181A541	C. CAPACITOR CH 50V 180P	2	
R360	ERJ3RBD302	M. RESISTOR CH 1/16W 3K	1		C236	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1	
R361	ERJ3GEYJ125	M. RESISTOR CH 1/16W 1.2M	1		C237	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R362	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		C238	F2H1C1810001	E. CAPACITOR CH 16V 180U	1	
R364	ERJ3RBD911	M. RESISTOR CH 1/16W 910	1		C239	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R365	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		C241	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R366	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C243	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R367	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1		C244	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R368	ERJ3RBD303	M. RESISTOR CH 1/16W 30K	1		C245	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R369	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1		C246	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R370	ERJ3RBD751	M. RESISTOR CH 1/16W 750	1		C247	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R372	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C248, 49	F1G1A473A032	C. CAPACITOR CH 10V 0.047U	2	
R375	ERJ3RED100	M. RESISTOR CH 1/16W 10	1		C250	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
R376	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1		C252, 53	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	2	
R377	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1						
R379	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		CN100	K1KYC0BA0274	CONNECTOR	1	
R380	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1		CN101	K1MR70B00004	CONNECTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
CN102	K1KB20AA0011	CONNECTOR (FEMALE)	1		R299	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
CN200	K1NA68E00091	CONNECTOR	1		R300	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
CN201	K1NA68E00090	CONNECTOR	1		R301	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1	
CN202	K1YYZZ000049	CARD HOLDER B	1		R302	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
CN203	K1YYZZ000048	CARD HOLDER A	1		R303	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1	
					R304	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
D100-03	LNJ115W88RA	DIODE	4		R305	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
D104	DB2J31400L	DIODE	1		R306	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
					R307	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
IC103	COJBAB000832	IC	1		R312	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
IC104, 05	COJBAA000362	IC	2		R313-19	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	7	
IC200	C1DB00001179	IC	1		R320	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1	
IC201, 02	COJBAA000362	IC	2		R321	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
					R338	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
L100	JOJHC0000032	FILTER	1		R340, 41	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L101, 02	JOJKC0000009	FILTER	2		R347	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L103, 04	ERJ6GEYOR00	M. RESISTOR CH 1/10W	0 2						
L200-03	JOJHC0000032	FILTER	4		ZA102-05	K4CD01000015	TERMINAL	4	
L204-06	JOJDC0000102	FILTER	3				MISCELLANEOUS		
L207-09	JOJHC0000032	FILTER	3						
Q100	DRA9114TOL	TRANSISTOR	1			VG00N33	BUSTERAID	2	
Q101, 02	DMA564050R	TRANSISTOR	2			VMZ3478	CARD SLOT BARRIER B	1	
Q200, 01	B1CHRC000001	TRANSISTOR	2			VMZ3720	CARD COVER SHEET	2	
Q203	DRC9144E0L	TRANSISTOR	1			VMZ3726	CARD COVER SHEET B	1	
Q206	B1CHRC000001	TRANSISTOR	1			VMP9229	P2 CARD FRAME	1	
						VMT2141	SHIELD FOAM	2	
						VMT2145	SHIELD FOAM	1	
R100-08	EXBN8V222J	COMBI. R-R	22 9			VMT2146	SHIELD FOAM	1	
R109	ERJ2GEJ220	M. RESISTOR CH 1/16W	22 1			VMT1862	GASKET	1	
R110-12	ERJ2GEJ330	M. RESISTOR CH 1/16W	33 3			XYN2+J6FJ	SCREW	6	
R113	ERJ2GEJ680	M. RESISTOR CH 1/16W	68 1						
R115, 16	ERJ2GEJ330	M. RESISTOR CH 1/16W	33 2						
R117, 18	ERJ2GEJ181	M. RESISTOR CH 1/16W	180 2						
R119	ERJ2GEJ821	M. RESISTOR CH 1/16W	820 1						
R120	ERJ2GEJ181	M. RESISTOR CH 1/16W	180 1						
R121	ERJ2GEJ821	M. RESISTOR CH 1/16W	820 1						
R122	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1						
R123	EXBN8V473J	COMBI. R-R	47K 1		■ E12	VEP001Y3B	SD CARD P. C. BOARD	1 (RTL)	
R124, 25	ERJ2GEJ330	M. RESISTOR CH 1/16W	33 2						
R126, 27	ERJ2GEJ181	M. RESISTOR CH 1/16W	180 2						
R128, 29	ERJ2GEJ821	M. RESISTOR CH 1/16W	820 2		C1	F1G1C1030008	C. CAPACITOR CH 16V 0.01U	1	
R138	ERJ2GEOR00	M. RESISTOR CH 1/16W	0 1		C2	F1JOJ106A020	C. CAPACITOR CH6. 3V 10U	1	
R143-49	ERJ2GEJ680	M. RESISTOR CH 1/16W	68 7						
R150	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K 1		CN1	K1KB20AA0181	CONNECTOR (FEMALE)	1	
R161	ERJ2GEJ101	M. RESISTOR CH 1/16W	100 1		CN2	K1NA09E00038	CONNECTOR	1	
R162-68	ERJ2GEJ220	M. RESISTOR CH 1/16W	22 7						
R170-81	ERJ3GEYOR00	M. RESISTOR CH 1/16W	0 12		D1	LNJ310M6URA	DIODE	1	
R189	ERJ2GEJ472	M. RESISTOR CH 1/16W	4. 7K 1						
R190-95	ERJ3GEYOR00	M. RESISTOR CH 1/16W	0 6		R1-R4	ERJ3GEYOR00	M. RESISTOR CH 1/16W	0 4	
R196	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1		R5-10	ERJ2GEJ220	M. RESISTOR CH 1/16W	22 6	
R200-08	EXBN8V470J	COMBI. R-R	47 9						
R209	ERJ2GEJ220	M. RESISTOR CH 1/16W	22 1		ZA1-A3	K4CD01000015	TERMINAL	3	
R210	ERJ2GEJ101	M. RESISTOR CH 1/16W	100 1				MISCELLANEOUS		
R211, 12	ERJ2GEJ330	M. RESISTOR CH 1/16W	33 2						
R215	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1			VG1089	SD CARD COVER	1	
R216	ERJ2GEJ220	M. RESISTOR CH 1/16W	22 1						
R217, 18	ERJ2GEJ104	M. RESISTOR CH 1/16W	100K 2						
R220	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K 1						
R222	ERJ2GEOR00	M. RESISTOR CH 1/16W	0 1						
R226	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K 1						
R228	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1		■ E13	VEP80E92A	RELAY P. C. BOARD	1 (RTL)	
R231	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1						
R234-36	ERJ2GEOR00	M. RESISTOR CH 1/16W	0 3						
R237	ERJ2GEJ104	M. RESISTOR CH 1/16W	100K 1		C1, C2	F1H2A102A009	C. CAPACITOR CH100V 1000P	2	
R240, 41	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 2		C3, C4	F1H2A471A015	C. CAPACITOR CH100V 470P	2	
R243	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1		C5, C6	EEEFK1J4R7	E. CAPACITOR 63V 4. 7U	2	
R245	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1		C7, C8	F1G1H330A565	C. CAPACITOR CH 50V 33P	2	
R248	ERJ2GEJ102	M. RESISTOR CH 1/16W	1K 1		C9, 10	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2	
R249	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1		C11	EEEFK1J4R7	E. CAPACITOR 63V 4. 7U	1	
R251	ERJ2GEJ104	M. RESISTOR CH 1/16W	100K 1		C21, 22	F1H2A102A009	C. CAPACITOR CH100V 1000P	2	
R252	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 1		C23, 24	F1H2A471A015	C. CAPACITOR CH100V 470P	2	
R253-67	EXBN8V750J	COMBI. R-R	75 15		C25, 26	EEEFK1J4R7	E. CAPACITOR 63V 4. 7U	2	
R268-70	ERJ2GEJ750	M. RESISTOR CH 1/16W	75 3		C27, 28	F1G1H330A565	C. CAPACITOR CH 50V 33P	2	
R271, 72	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 2		C29, 30	F1G1A1040006	C. CAPACITOR CH 10V 0. 1U	2	
R279, 80	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K 2		C31	EEEFK1J4R7	E. CAPACITOR 63V 4. 7U	1	
R281-83	ERJ2GEJ750	M. RESISTOR CH 1/16W	75 3		C41, 42	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
R284-98	EXBN8V750J	COMBI. R-R	75 15		C43, 44	F1J1A335A003	C. CAPACITOR CH 10V 3. 3U	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C51-60	F1G1H101A565	C. CAPACITOR CH 50V 100P	10		D1	B0KB00000041	DIODE	1	
C63, 64	F1H1H102A831	C. CAPACITOR CH 50V 1000P	2		D2, D3	D4ED12700007	DIODE	2	
					D4	B0KB00000041	DIODE	1	
CN1	K1KY30AA0553	CONNECTOR	1		D5, D6	D4ED12700007	DIODE	2	
CN2	K1KA06B00140	CONNECTOR (MALE)	1						
CN3	K1KA10B00169	CONNECTOR (MALE)	1		JK1	K1FB104B0064	CONNECTOR	1	
CN4	K1KA02BA0104	CONNECTOR (MALE)	1		JK2	K1FY104B0010	CONNECTOR	1	
D1, D2	DA3S101F0L	DIODE	2		L1	JOJCC0000059	FILTER	1	
D21, 22	DA3S101F0L	DIODE	2		L2	JOMAB0000212	FILTER	1	
D41	MA3J7420GL	DIODE	1		L3	JOJCC0000059	FILTER	1	
					L4	JOMAB0000212	FILTER	1	
IC1, C2	C0ABBB000032	IC	2						
IC3	C0CBDC000008	IC	1		R1, R2	ERJ3GEY0R00	M. RESISTOR CH 1/16W	0	2
IC4	XC62DN5002M	IC	1				MISCELLANEOUS		
L1, L2	G1C100KA0115	COIL 10UH	2			VMP9232	USB ANGLE	1	
L21, 22	G1C100KA0115	COIL 10UH	2			VMT2141	SHIELD FOAM	2	
L51-60	JOJBC0000019	FILTER	10			VMT2144	SHIELD FOAM	1	
L61, 62	JOJCC0000009	FILTER	2			XYN2+J6FJ	SCREW	2	
Q1, Q2	B1ABBL000006	TRANSISTOR	2						
Q3	B1ADBL000010	TRANSISTOR	1						
Q4	B1ABBL000006	TRANSISTOR	1						
Q5	DRA9144E0L	TRANSISTOR	1						
R1, R2	ERJ12YJ682	M. RESISTOR CH 1/2W 6.8K	2		■ E16	VEP80E95A	FRONT MIC P. C. BOARD	1	(RTL)
R3	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1						
R4, R5	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2						
R6, R7	ERJ2RHD331	M. RESISTOR CH 1/16W 330	2		C101-05	F1H2A102A009	C. CAPACITOR CH100V 1000P	5	
R8	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		C106	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	1	
R9	ERJ2RHD152	M. RESISTOR CH 1/16W 1.5K	1						
R10	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1		CN101	K1FA106A0008	CONNECTOR (MALE)	1	
R11	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1						
R12	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1		JK101	K1AB105B0002	CONNECTOR (FEMALE)	1	
R21, 22	ERJ12YJ682	M. RESISTOR CH 1/2W 6.8K	2						
R23	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1		L101-05	JOJCC0000118	FILTER	5	
R24, 25	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2						
R26, 27	ERJ2RHD331	M. RESISTOR CH 1/16W 330	2						
R28	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1						
R29	ERJ2RHD152	M. RESISTOR CH 1/16W 1.5K	1						
R30	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1						
R31	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		■ E17	VEP80E90A	R SIDE 1 P. C. BOARD	1	(RTL)
R32	ERJ3GEYJ273	M. RESISTOR CH 1/16W 27K	1						
R33, 34	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2						
R35	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		C102-04	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
R36	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1		C105	F1JOJ106A020	C. CAPACITOR CH6.3V 10U	1	
R37	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1		C106	F1J1A106A043	C. CAPACITOR CH 10V 10U	1	
R41, 42	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2		C107	F1JOJ106A020	C. CAPACITOR CH6.3V 10U	1	
					C108-10	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
ZA1, A2	K4CD01000015	TERMINAL	2		C117	F1G1H330A565	C. CAPACITOR CH 50V 33P	1	
					C119-22	F1G1H330A565	C. CAPACITOR CH 50V 33P	4	
					C123-26	F1H1C105A118	C. CAPACITOR CH 16V 1U	4	
					C127-30	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	4	
					C131	F1JOJ106A020	C. CAPACITOR CH6.3V 10U	1	
					C132	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
■ E14	VEP80E93A	L SIDE JACK P. C. BOARD	1	(RTL)	C133, 34	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
					C201-08	F1G1H1020008	C. CAPACITOR CH 50V 1000P	8	
					C209	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1	
CN201	K1KY08A00005	CONNECTOR	1		C210-17	F1G1H1020008	C. CAPACITOR CH 50V 1000P	8	
D201-03	D4ED1220A006	VARISTOR	3		C218-20	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
					C221, 22	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
JK201	VJS3901	CONNECTOR (FEMALE)	1		C223-28	F1G1H1020008	C. CAPACITOR CH 50V 1000P	6	
JK202	K1QBB2AA0005	CONNECTOR	1						
					CN101	K1KY40A00029	CONNECTOR	1	
R201-03	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3		CN102, 03	K1KA04B00153	CONNECTOR (MALE)	2	
					CN104	K1KA02BA0047	CONNECTOR (MALE)	1	
					CN105	K1KY32AA0796	CONNECTOR	1	
					CN106	K1KY04AA0858	CONNECTOR	1	
					CN107	K1MN24BA0059	CONNECTOR	1	
					CN201	K1KA12B00109	CONNECTOR (MALE)	1	
■ E15	VEP80E94A	USB CN 1 P. C. BOARD	1	(RTL)	IC101	C0CBAC000060	IC	1	
					IC102	C0CBBC000049	IC	1	
					IC201, 02	COJBAQ000080	IC	2	
CN1	K1KY10BA0135	CONNECTOR	1		IC203, 04	COJBAZ002934	IC	2	
					IC205	C0CBBC000049	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC1003	COJBAE000359	IC	1		C601	F1J0J106A020	C. CAPACITOR CH6.3V 10U	1	
L101-03	JOJHC0000032	FILTER	3		C602-04	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3	
L104-06	JOJDC0000102	FILTER	3		C605, 06	F1G1H1020008	C. CAPACITOR CH 50V 1000P	2	
L107, 08	JOJAD0000028	FILTER	2		CN201	K1MN20AA0018	CONNECTOR	1	
Q101, 02	DRC9144E0L	TRANSISTOR	2		CN601	K1MN40BA0059	CONNECTOR	1	
Q103	DSC900100L	TRANSISTOR	1		CN602	K1MN24BA0059	CONNECTOR	1	
Q104	DSA700400L	TRANSISTOR	1		CN603	K1KA02B00157	CONNECTOR (MALE)	1	
R101-06	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	6		D301	L5AAAGE00008	DISPLAY	1	
R107, 08	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2		D302-11	B3ACB0000103	LED	10	
R110-15	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	6		D312	LN1251CALTR	LED	1	
R116-21	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	6		D313	LNJ115W88RA	DIODE	1	
R122, 23	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		D401	DA3J101K0L	DIODE	1	
R124, 25	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		D402	DZ2J150M0L	DIODE	1	
R126	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		D403	MA3X704E0L	DIODE	1	
R127	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1		D404	DZ2J056M0L	DIODE	1	
R128	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1		D501, 02	DA3J102D0L	DIODE	2	
R129	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1		IC101	COEBE0000348	IC	1	
R136	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	1		IC102	COJBAA000340	IC	1	
R201, 02	EXBN8V473J	COMBI. R-R 47K	2		IC103	H1Z3272B0006	CRYSTAL OSCILLATOR	1	
R203	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		IC104	C2CBYY000514	IC	1	
R204, 05	EXBN8V473J	COMBI. R-R 47K	2		IC105	C3ZBF0000020	IC	1	
R206-09	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4		IC106	COJBAB000074	IC	1	
R210-16	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	7		IC107	COJBAN000140	IC	1	
SW201-07	KOH1BA000503	SWITCH	7		IC108	COJBAB000717	IC	1	
SW208	VSS0186	SWITCH	1		IC109	COJBAB000126	IC	1	
SW209	VSS0187	SWITCH	1		IC110, 11	COJBAB000302	IC	2	
VR101-03	D2BCA14Y0014	V. RESISTOR 10K	3		IC201	COJBAB000121	IC	1	
ZA201, 02	K4CD01000015	TERMINAL	2		IC202-04	COJBAB0002331	IC	3	
■ E18	VEP80E91A	R SIDE 2 P. C. BOARD	1	(RTL)	IC205	COJBAB000675	IC	1	
B401	BCR20H4	BUTTON BATTERY HOLDER	1		IC206	COJBAA000340	IC	1	
C101, 02	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		IC207	COJBAB000121	IC	1	
C103	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	1		IC208	COBCBC000053	IC	1	
C104	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC209	COJBAB0002331	IC	1	
C105	EEEB0J330	E. CAPACITOR 6.3V 33U	1		IC210	COJBAA000344	IC	1	
C106	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1		IC301	COHBA0000277	IC	1	
C107, 08	F1H1H1800004	C. CAPACITOR CH 50V 18P	2		IC302-06	COJBAB000414	IC	5	
C109	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	1		IC401	COBCBAHE00002	IC	1	
C110	F3H1C686A019	T. CAPACITOR CH 16V 68U	1		IC402, 03	COBCBCDC00039	IC	2	
C111-13	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	3		IC404	COBCBC000234	IC	1	
C114	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		IC405	COBCBC000055	IC	1	
C115-21	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	7		IC406	COBBBA000084	IC	1	
C122, 23	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		IC407	COEBB0000122	IC	1	
C201-07	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	7		L101-04	JOJDC0000102	FILTER	4	
C210-12	F1H1C105A118	C. CAPACITOR CH 16V 1U	3		L201	JOJDC0000102	FILTER	1	
C213, 14	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		L301-03	JOJDC0000102	FILTER	3	
C301-36	F1G1H1020008	C. CAPACITOR CH 50V 1000P	36		L601	JOJHC0000032	FILTER	1	
C337-41	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	5		L603, 04	JOJHC0000032	FILTER	2	
C342, 43	F1H1C105A118	C. CAPACITOR CH 16V 1U	2		L605	JOJDC0000102	FILTER	1	
C344, 45	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		Q201-06	DRC9144E0L	TRANSISTOR	6	
C346	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		Q301, 02	DRA9144E0L	TRANSISTOR	2	
C347	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1		Q303, 04	DSC250100L	TRANSISTOR	2	
C401	EEEB1H100	E. CAPACITOR 50V 10U	1		Q305-07	DRC9114Y0L	TRANSISTOR	3	
C402	EEEB1E330P	E. CAPACITOR 25V 33U	1		Q401, 02	DSC700300L	TRANSISTOR	2	
C403, 04	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		Q403	DRA9144E0L	TRANSISTOR	1	
C405	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		Q404-06	DRC9144E0L	TRANSISTOR	3	
C406	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1		Q407	B1CHQD000001	TRANSISTOR	1	
C407-12	F1H1C105A118	C. CAPACITOR CH 16V 1U	6		Q501	XP0121300L	TRANSISTOR	1	
C413	F1J0J106A020	C. CAPACITOR CH6.3V 10U	1		Q502	DRA9144E0L	TRANSISTOR	1	
C414	F1H1C105A118	C. CAPACITOR CH 16V 1U	1		Q503	DRC9144E0L	TRANSISTOR	1	
C415, 16	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2		Q504	DRA9144E0L	TRANSISTOR	1	
C417, 18	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2		Q505, 06	DRC9144E0L	TRANSISTOR	2	
C501-05	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	5		Q507	DRA9144E0L	TRANSISTOR	1	
C506	F1L1A4760003	C. CAPACITOR CH 16V 47U	1		Q508-10	DRC9144E0L	TRANSISTOR	3	
					Q511	DMG204010R	TRANSISTOR	1	
					R101	EXBN8V473J	COMBI. R-R 47K	1	
					R103, 04	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
					R105	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
					R106	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
					R107, 08	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
					R109	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
					R110	ERJ3GEY6332	M. RESISTOR CH 1/16W 3.3K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R111	ERJ3GEYJ105	M. RESISTOR CH 1/16W 1M	1		R509	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R112, 13	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R510	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1	
R114-19	EXBN8V473J	COMBI. R-R	6		R511, 12	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
R120	EXBN8V101J	COMBI. R-R	100		R601-04	ERJ2RHD512	M. RESISTOR CH 1/16W 5.1K	4	
R121	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R605, 06	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R122	EXBN8V473J	COMBI. R-R	47K		SW301, 02	VSP1005	SWITCH	2	
R123-27	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	5		SW303	VSS0187	SWITCH	1	
R128	EXBN8V101J	COMBI. R-R	100		SW304	VSP1005	SWITCH	1	
R129	EXBN8V473J	COMBI. R-R	47K		SW305-08	EVQPHL03T	SWITCH	4	
R130, 31	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		SW309-11	VSS0187	SWITCH	3	
R132	EXBN8V473J	COMBI. R-R	47K		SW312, 13	VSS0186	SWITCH	2	
R201	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		SW314, 15	VSS0187	SWITCH	2	
R202	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		SW316	VSS0186	SWITCH	1	
R203	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		SW317-25	VSP1005	SWITCH	9	
R204	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1						
R205, 06	EXBN8V101J	COMBI. R-R	100		VR601, 02	D2BCA14Y0014	V. RESISTOR 10K	2	
R207	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1						
R208, 09	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		X101	HOJ614400008	CRYSTAL OSCILLATOR	1	
R210-12	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3						
R213	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		ZA601, 02	K4CD01000015	TERMINAL	2	
R214	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1				MISCELLANEOUS		
R215-17	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3						
R218	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1			VGH3361	VR NAME PLATE	2	
R219	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1			VG09649	AUDIO VOLUME BOX	1	
R220	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1			VGU9302	VR KNOB REAR	2	
R221, 22	EXBN8V101J	COMBI. R-R	100			VMB3907	HELICAL SPRING	2	
R223	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1			VMG1505	WATERPROOF RUBBER SHEET	2	
R224-26	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3			VMT1825	WATERPROOF CUSHION	1	
R227	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1			VMT2078	LED SHEET	1	
R228, 29	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2			VMX3656	VOLUME SPACER	2	
R230	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1			XQN2-BJ5FJK	SCREW	3	
R231	EXBN8V101J	COMBI. R-R	100			VGL0915	BACK LIGHT BASE	1	
R232	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1						
R233	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1						
R234, 35	EXBN8V473J	COMBI. R-R	47K						
R236	EXBN8V472J	COMBI. R-R	4.7K						
R237	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1						
R238	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1						
R239	EXBN8V473J	COMBI. R-R	47K						
R240-43	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	4		■ E19	VEP20D02A	MONITOR P. C. BOARD	1	(RTL)
R244-46	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3						
R247, 48	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2						
R249	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1						
R250, 51	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		C102, 03	F1K1C106A116	C. CAPACITOR CH 16V 10U	2	
R301	ERJ3RED754	M. RESISTOR CH 1/16W 750K	1		C3000-02	F1H1C105A118	C. CAPACITOR CH 16V 1U	3	
R302	ERJ2GEJ562	M. RESISTOR CH 1/16W 5.6K	1		C3003	F1G1C1040010	C. CAPACITOR CH 16V 0.1U	1	
R303	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1		C3004	F1K1C106A116	C. CAPACITOR CH 16V 10U	1	
R304	ERJ2GEJ562	M. RESISTOR CH 1/16W 5.6K	1		C3005	F1K1C475A062	C. CAPACITOR CH 16V 4.7U	1	
R305	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1		C3006, 07	F1H1C105A118	C. CAPACITOR CH 16V 1U	2	
R306, 07	ERJ6GEY6331	M. RESISTOR CH 1/10W 330	2		C3008-11	F1J1E225A178	C. CAPACITOR CH 25V 2.2U	4	
R308, 09	ERJ6GEYF561	M. RESISTOR CH 1/10W 560	2		C3012, 13	F1K1C475A062	C. CAPACITOR CH 16V 4.7U	2	
R310	ERJ3RBD181	M. RESISTOR CH 1/16W 180	1		C3014	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
R311	ERJ3RBD391	M. RESISTOR CH 1/16W 390	1		C3015	F1K1C475A062	C. CAPACITOR CH 16V 4.7U	1	
R312	ERJ3RBD101	M. RESISTOR CH 1/16W 100	1		C3016-21	F1J1E225A178	C. CAPACITOR CH 25V 2.2U	6	
R313-22	EXBN8V473J	COMBI. R-R	47K	10	C3022	F1G1C1040010	C. CAPACITOR CH 16V 0.1U	1	
R323	EXBN8V101J	COMBI. R-R	100	1	C3023	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
R324	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		C3024	F1G1C1040010	C. CAPACITOR CH 16V 0.1U	1	
R325	EXBN8V473J	COMBI. R-R	47K	1	C3025	F1G1C1030008	C. CAPACITOR CH 16V 0.01U	1	
R326	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		C3026	F1G1C1040010	C. CAPACITOR CH 16V 0.1U	1	
R327-29	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3		C3030	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
R401	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1		C3032	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
R403-06	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	4						
R407	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		CN6270	K1KY32AA0796	CONNECTOR	1	
R408, 09	ERJ3GEYJ106	M. RESISTOR CH 1/16W 10M	2		CN6271	K1MY29BA0338	CONNECTOR	1	
R410	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1		CN6272	K1MN39BA0132	CONNECTOR	1	
R411	ERJ3RBD123	M. RESISTOR CH 1/16W 12K	1		CN6273	K1MN12BA0059	CONNECTOR	1	
R412	ERJ3RBD563	M. RESISTOR CH 1/16W 56K	1						
R413	ERJ3GEYJ564	M. RESISTOR CH 1/16W 560K	1		D3000, 01	DB2S31100L	DIODE	2	
R414	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1						
R415	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1		IC3000	C1CB00002847	IC	1	
R416	ERJ3GEYJ104	M. RESISTOR CH 1/16W 100K	1						
R417	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1		L100	JOJHC0000009	FILTER	1	
R418	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	1		L3000, 01	JOJHC00000032	FILTER	2	
R501	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1		L3003, 04	JOJHC00000032	FILTER	2	
R502	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		L3005, 06	JOJAD00000028	FILTER	2	
R504	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1						
R505-08	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	4		Q100-07	DSC900100L	TRANSISTOR	8	
					Q108	B1ADCE000018	TRANSISTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R100	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R105	ERJ3GEYJ221	M. RESISTOR CH 1/16W 220	1	
R101-08	ERJ3GEYJ390	M. RESISTOR CH 1/16W 39	8		R106-08	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	3	
R109	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		SW102, 03	KOH1BA000503	SWITCH	2	
R110	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		SW104	EVEVPGJF008B	SWITCH	1	
R111-14	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	4		ZA101	K4CD01000015	TERMINAL	1	
R3020, 21	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2						
R3025-30	EXBN8V330J	COMBI. R-R	33	6					
R3041	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1						
R3042	EXBN8V330J	COMBI. R-R	33	1					
R3044-47	ERJ2GE0R00	M. RESISTOR CH 1/16W 0	4						
TP3000	EYF6CU	TEST POINT	1		■ E23	VEP20D10A	TOGGLE SW P. C. BOARD	1	(RTL)
ZA100	K4CD01000015	TERMINAL	1						
■ E20	VEP20D07A	HINGE P. C. BOARD	1	(RTL)					
CN6280	K1KY04AA0858	CONNECTOR	1		C11, 12	F1G1H1020008	C. CAPACITOR CH 50V 1000P	2	
SW100	KOL1BA000147	SWITCH	1		CN11	K1KA09B00076	CONNECTOR (MALE)	1	
SW101	KOL1BA000151	SWITCH	1						
					D11-18	D4ED18R00003	VARISTOR	8	
					R11, 12	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	2	
					SW11-13	KOE112G00030	SWITCH	3	
					SW14	KOE112G00042	SWITCH	1	
■ E21	VEP20D08A	FRONT SW P. C. BOARD	1	(RTL)	■ E24	VEP20D11A	POWER SW P. C. BOARD	1	(RTL)
C1, C2	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2						
CN1	K1MN14AA0074	CONNECTOR	1		CN21	K1KA02B00157	CONNECTOR (MALE)	1	
CN2	K1FA106A0008	CONNECTOR (MALE)	1		SW21	KOE112G00033	SWITCH	1	with Accessory
CN3	K1KA07A00263	CONNECTOR (MALE)	1						
L1	JOJKC0000009	FILTER	1						
					■ E25	VEP002E6A	ANTON SW P. C. BOARD	1	(RTL)
R5-8	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	4						
R10-13	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	4						
					CN101	K1KA08B00192	CONNECTOR (MALE)	1	
SW1	VST0194	SWITCH	1		CN102	K1KA06B00140	CONNECTOR (MALE)	1	
SW2	VST0195	SWITCH	1						
					SW101	KOE112A00144	SWITCH	1	with Accessory
		MISCELLANEOUS							
	VMP9790	FRONT TOGGLE SW PLATE	1						
					■ E26	VEP001Z6B	HANDLE SW P. C. BOARD	1	(RTL)
■ E22	VEP20D09A	MENU SW P. C. BOARD	1	(RTL)	CN9001	K1KA03B00139	CONNECTOR (MALE)	1	
					SW9001	KOD122B00054	SWITCH	1	
					SW9002	VST0335	SWITCH	1	
C101	F3F1C225A015	T. CAPACITOR CH 16V 2.2U	1		ZA9001	K4CD01000015	TERMINAL	1	
C102	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	1						
C103, 04	F1H0J1050012	C. CAPACITOR CH6.3V 1U	2						
C105-09	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	5						
CN101	K1KA07B00086	CONNECTOR (MALE)	1						
D101-03	DA3J101F0L	DIODE	3		■ E27	VEP001Z7B	HANDLE TALLY P. C. BOARD	1	(RTL)
IC101, 02	COJBAB000744	IC	2						
L101	JOJKC0000009	FILTER	1		CN9100	K1KA02B00157	CONNECTOR (MALE)	1	
R101	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1		D9100	B3AAA0000984	LED	1	
R102	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1						
R103	ERJ3GEYG332	M. RESISTOR CH 1/16W 3.3K	1		R9100	ERJ6GEY0R00	M. RESISTOR CH 1/10W 0	1	
R104	ERJ3GEYJ181	M. RESISTOR CH 1/16W 180	1		SW9100	KOE122A00036	SWITCH	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
		MISCELLANEOUS		
	VMX2188020	SPACER	1	
■ E28	VEP002E7A	BATTERY IF P.C. BOARD	1 (RTL)	
C101, 02	F1H1H223A219	C. CAPACITOR CH 50V 0.022P	2	
C103	F1G1C104A083	C. CAPACITOR CH 16V 0.1U	1	
C104	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
C105-07	F1H1H222A219	C. CAPACITOR CH 50V 2200P	3	
C108, 09	F1H1H1010005	C. CAPACITOR CH 50V 100P	2	
C110, 11	F1H1H223A219	C. CAPACITOR CH 50V 0.022P	2	
C112	F1G1C104A083	C. CAPACITOR CH 16V 0.1U	1	
C113	F1G1H1020008	C. CAPACITOR CH 50V 1000P	1	
CN101, 02	K1KA05B00134	CONNECTOR (MALE)	2	
ZA101, 02	K4CD01000015	TERMINAL	2	
		MISCELLANEOUS		
	VEE1J38	ANTON-BATT IF1 CABLE	1	
	VEE1J39	ANTON-BATT IF2 CABLE	1	
	VEE1J40	BATT IF-POWER SUB1 CABLE	2	
■ E29	VEP002E4A	EVF CN P.C. BOARD	1 (RTL)	
C1-C8	F1G1H101A565	C. CAPACITOR CH 50V 100P	8	
C9-15	F1G1C104A083	C. CAPACITOR CH 16V 0.1U	7	
C17, 18	F1H1E104A030	C. CAPACITOR CH 25V 0.01U	2	
CN1	K1KY30A00042	CONNECTOR	1	
CN2	K1KA08A00445	CONNECTOR (MALE)	1	
JK1	K1AY120B0001	CONNECTOR	1	
L1-L4	JOJBC0000019	FILTER	4	
L5	JOJBC0000009	FILTER	1	
L6	JOJBC00000032	FILTER	1	
L7	JOJBC00000019	FILTER	1	
L8	JOJBC00000032	FILTER	1	
L9, 10	JOJBC00000019	FILTER	2	
R1-R5	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	5	
ZA1	K4CD01000010	TERMINAL	1	
		MISCELLANEOUS		
	VMT2140	SHIELD FOAM	2	
■ E30	VEP84410A	REAR JACK P.C. BOARD	1 (RTL)	
C1-C3	F1H2A471A015	C. CAPACITOR CH100V 470P	3	
C4	F1H1H103A220	C. CAPACITOR CH 50V 0.01U	1	
C5, C6	F1H2A471A015	C. CAPACITOR CH100V 470P	2	
C7, C8	EEEFK1J4R7	E. CAPACITOR 63V 4.7U	2	
C9, 10	F1G1H330A565	C. CAPACITOR CH 50V 33P	2	
C11, 12	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C13, 14	F1J2A104A023	C. CAPACITOR CH100V 0.1U	2	
C15	EEEFK1J4R7	E. CAPACITOR 63V 4.7U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C16, 17	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C18-21	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	4	
C22	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C23	F1J1A335A003	C. CAPACITOR CH 10V 3.3U	1	
C24	F1H1C105A118	C. CAPACITOR CH 16V 1U	1	
C25	F1J1A335A003	C. CAPACITOR CH 10V 3.3U	1	
C51-53	F1H2A471A015	C. CAPACITOR CH100V 470P	3	
C54	F1H1H103A220	C. CAPACITOR CH 50V 0.01U	1	
C55, 56	F1H2A471A015	C. CAPACITOR CH100V 470P	2	
C57, 58	EEEFK1J4R7	E. CAPACITOR 63V 4.7U	2	
C59, 60	F1G1H330A565	C. CAPACITOR CH 50V 33P	2	
C61, 62	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
C63, 64	F1G1E1030005	C. CAPACITOR CH 25V 0.01U	2	
C65, 66	F1G1A1040006	C. CAPACITOR CH 10V 0.1U	2	
CN1	K1MN24A0018	CONNECTOR	1	
CN2	K1MN06BA0252	CONNECTOR	1	
CN3	K1KA06B00140	CONNECTOR (MALE)	1	
D4, D5	DA3S101F0L	DIODE	2	
D6	KR5009X-1CDE	LED	1	
D7	MA3J7420GL	DIODE	1	
D54, 55	DA3S101F0L	DIODE	2	
IC1, C2	COABBB000032	IC	2	
IC3, C4	COJBAD000207	IC	2	
IC5	COCBDC000008	IC	1	
IC6	XC62DN5002M	IC	1	
IC7, C8	COJBAA000346	IC	2	
JK1, K2	K1AY103A0003	CONNECTOR	2	
L1-L3	JOJCC0000118	FILTER	3	
L4, L5	G1C100KA0115	COIL 10UH	2	
L51-53	JOJCC0000118	FILTER	3	
L54, 55	G1C100KA0115	COIL 10UH	2	
Q1	B1ADBL000010	TRANSISTOR	1	
Q2	B1ABBL000006	TRANSISTOR	1	
Q3	B1ADBL000010	TRANSISTOR	1	
Q4, Q5	B1ABBL000006	TRANSISTOR	2	
R2, R3	ERJ12YJ682	M. RESISTOR CH 1/2W 6.8K	2	
R4, R5	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2	
R6	ERJ2RHD822	M. RESISTOR CH 1/16W 8.2K	1	
R7	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R8	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R9	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R10	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R11	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R12	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R13	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R14	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R15	ERJ2RHD561	M. RESISTOR CH 1/16W 560	1	
R16	ERJ2RHD151	M. RESISTOR CH 1/16W 150	1	
R17-20	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	4	
R21, 22	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2	
R23	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R24, 25	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	2	
R26, 27	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2	
R28	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R29	ERJ3GEYJ103	M. RESISTOR CH 1/16W 10K	1	
R30-32	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R33	ERJ3GEYJ121	M. RESISTOR CH 1/16W 120	1	
R34, 35	ERJ2RHD101	M. RESISTOR CH 1/16W 100	2	
R36	ERJ6GEYJ121	M. RESISTOR CH 1/10W 120	1	
R37	ERJ6GEYJ101	M. RESISTOR CH 1/10W 100	1	
R38, 39	ERJ3GEYOR00	M. RESISTOR CH 1/16W 0	2	
R52, 53	ERJ12YJ682	M. RESISTOR CH 1/2W 6.8K	2	
R54, 55	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2	
R56	ERJ2RHD822	M. RESISTOR CH 1/16W 8.2K	1	
R57	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R58	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R59	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R60	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R61	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R62	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R63	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1		D21	B0KB00000041	DIODE	1	
R64	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1		D22, 23	D4ED12700007	DIODE	2	
R65	ERJ2RHD561	M. RESISTOR CH 1/16W 560	1						
R66	ERJ2RHD151	M. RESISTOR CH 1/16W 150	1		JK21	K1FY104B0010	CONNECTOR	1	
R67, 68	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	2						
R69, 70	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	2		L21	J0MAB0000212	FILTER	1	
SW1, W2	K0D142A00023	SWITCH	2		R21	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1	
		MISCELLANEOUS			ZA21, 22	K4CD01000015	TERMINAL	2	
									(RTL)
	K9ZZ00000652	CONNECTOR	1						
	VGL1352	CONNECTOR CAP	1						
	VMT1503	PCB HOLDER RUBBER	1						
■ E31	VEP84411A	REAR SW P. C. BOARD	1	(RTL)					
C1-C3	F1H1H102A219	C. CAPACITOR CH 50V 1000P	3						
CN1	K1MN06BA0252	CONNECTOR	1						
D1	B3EB00000017	LED	1						
D2, D3	D4ED18R00003	VARISTOR	2						
SN1, N2	B3HB00000025	PHOTO TRANSISTOR	2						
SW1, W2	K0E122A00036	SWITCH	2						
■ E32	VEP01A20B	DC INPUT P. C. BOARD	1	(RTL)					
D1	B0EAKR000059	DIODE	1						
JK1	K1AA104H0038	CONNECTOR (MALE)	1						
		MISCELLANEOUS							
	VEE1F36	EXT DC IN 1 CABLE	1						
	K1YAO3000008	CONNECTOR HOUSING	1						
	VEE1F37	EXT DC IN 2 CABLE	1						
	K1YAO2000004	CONNECTOR	1						
■ E33	VEP80F01A	PHONE CN P. C. BOARD	1	(RTL)					
C31-33	ECUX1H103KBV	C. CAPACITOR CH 50V 0.01U	3						
CN31	K1KA04B00153	CONNECTOR (MALE)	1						
JK31	K2HC103B0202	JACK	1						
L31-33	J0JBC0000014	FILTER	3						
R31	ERJ3GEY0R00	M. RESISTOR CH 1/16W 0	1						
■ E34	VEP80F02A	USB WLAN CN P. C. BOARD	1	(RTL)					
CN21	K1KY08A00005	CONNECTOR	1						